

New products for machining technicians

NEW Circular Thread Milling Cutter – Type H



▲ Specialist for thread production in hardened and difficult-to-machine materials



Solid drilling and bore machining	1	HSS drilling
	2	Solid carbide drilling
	3	Indexable insert drilling
	4	Reaming and Countersinking
	5	Spindle Tooling

Threading	6	Taps and thread formers
	7	Circular and Thread Milling
	8	Thread turning

Turning	9	Turning Tools
	10	EcoCut
	11	Grooving Tools
	12	Miniature turning tools

Milling	13	HSS Milling Cutters
	14	Solid Carbide milling cutters
	15	Milling tools with indexable inserts

Tool Clamping	16	Adapters
	17	Accessories

	18	Material examples and article no. index
--	----	---

Table of contents

Symbol explanation	2
Overview Circular and Thread Milling Cutters	3
Toolfinder	4+5
Product programme	6-66
Technical Information	
Cutting Data	67-71
Milling Procedures	72
Calculation of cutting data for thread milling	73
Thread type – Tool type – Coatings	74

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Version

	No drilling required
	Central internal coolant
	Lateral internal coolant
	Coolant supply either via the flange or centrally
VHM	Solid carbide

Shank

DIN 6535
HA 
HB 
DIN 1835
A 
B 

- = Main application
- = Extended application



Thread / Flank angle

M	Explanation of the types of thread can be found on → Page 74.
	Flank angle 60°


Applications

	Circlip grooves
	Full radius slot milling
	Slot milling
	Multipurpose milling
	Chamfering and deburring
	Gear milling
	IR = internal right, IL = internal left
	ER = external right, EL = external left
	IR/IL + ER/EL

Overview Circular and Thread Milling Cutters

Modular Circular Milling Cutters with Carbide Indexable Inserts

- ▲ the perfect tool for every application
- ▲ various holders, depending on overhang
- ▲ the same threading insert for different pitches and diameters
- ▲ highest flexibility and stability
- ▲ in addition to circular thread milling, circular and linear milling operations can also be carried out

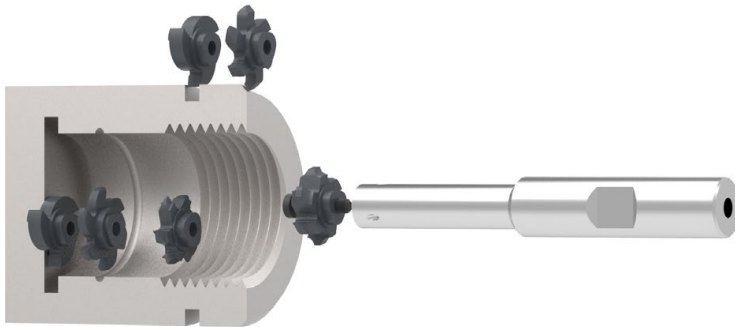


1st choice for small batch sizes
and large threads

7

Thread Milling Cutters with Indexable Carbide Inserts

- ▲ exchange of the insert for different threads
- ▲ same threading insert for different diameters

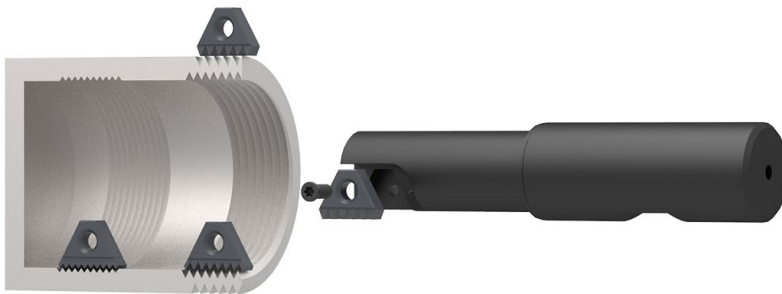

Solid Carbide Thread Milling Cutters

- ▲ short machining times, ideal for volume production
- ▲ one tool for all thread types
- ▲ one thread milling cutter for different diameters with the same pitch



MicroMill



SGF




UNI

Toolfinder

				from bore diameter in mm	
Modular Circular Milling Cutters with Carbide Indexable Inserts	Polygon		▲ high power transmission through polygon connection ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel	9,6	
	Mini Mill		▲ three interlocking rib location ▲ compatible with popular manufacturer systems ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel	9,6	
	System 300		▲ proven circular milling tool ▲ 3 edged inserts	7,9	
Thread Milling Cutters with Indexable Carbide Inserts	MWN		▲ multi tooth thread milling cutter ▲ double sided inserts ▲ exclusively for thread production ▲ holder for tapered threads	9,0	
	GZD		▲ multi tooth drilling and thread milling cutter ▲ for thread milling in solid material ▲ core hole and thread with one tool	14,0	
	GZG		▲ multi tooth thread milling cutter ▲ exclusively for thread production	18,5	
	EAW		▲ single point thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for thread production ▲ insert holder with cylindrical shank DIN 1835	17,5	
	EWM		▲ single point thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for thread production ▲ integral insert holder to DIN 69871	43,0	
Solid Carbide Thread Milling Cutters	Micro Mill		▲ solid carbide circular milling cutter for small diameters	1,25	
	UNI		▲ circular hole and thread milling cutter ▲ core hole, countersink and thread with one tool ▲ up to 3xD in short or long chipping materials	4,5	
	H		▲ circular thread milling cutters ▲ core hole, countersink and thread with one tool ▲ specifically for hardened materials, up to 2xD	2,3	
	HR		▲ single point thread milling cutter ▲ exclusively for thread production ▲ up to 3xD in materials up to 63 HRC	4,0	
	SFSE		▲ solid carbide thread milling cutter with chamfering facet ▲ only one tool for threading and chamfering	2,4	
	SGF		▲ solid carbide thread milling cutter without chamfering facet ▲ exclusively for thread production	3,15	

Thread / Flank angle									Applications					Tool holder
														
M	G	BSW	UN	UNC	Pg	NPT	Tr							
MF		BSF		UNF										
11+12	13	13		15			14		6+7	8+9	10	10	16+17	18+19
27+28	28								20+21	22+23 24	23	25		29+30
34	35	35							31+32	33		33		36
37	38		38		39	39								40+41
42	42													43
44	45		46		45									47
48	48		48											49
50	50		50											51
53										52		52		
54														
55				55										
56														
57+59	57+59			58+60		58+60								
61+63 66	62+63	64		64+65										

Milling inserts for circlip grooves without chamfer

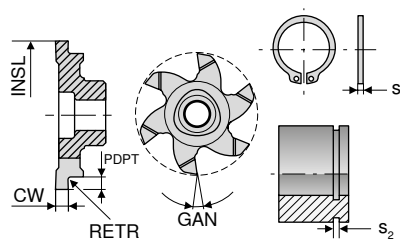

Ti500

Solid carbide
W2

Size	S ₂ H13 mm	INSL mm	CW _{±0,03} mm	PDPT mm	RETR mm	GAN °	S ₁ mm	NOF	Article no. 50 880 ...	EUR
6	0,90	9,6	0,98	1,20	0,3	6	0,80	3	34,28	292
	1,10	11,7	1,18	1,00	0,3	6	1,00	3	32,62	294
	1,30	11,7	1,38	1,00	0,3	6	1,20	3	32,62	296
	1,60	11,7	1,68	1,00	0,3	6	1,50	3	32,62	298
7	1,10	16,0	1,18	0,90	0,3	6	1,00	6	45,41	301
	1,30	16,0	1,38	1,10	0,3	6	1,20	6	45,74	302
	1,60	16,0	1,68	1,25	0,3	6	1,50	6	45,74	304
	1,85	16,0	1,93	1,25	0,3	6	1,75	6	45,74	306
	1,10	17,7	1,18	0,90	0,3	6	1,00	6	46,19	308
	1,30	17,7	1,38	1,10	0,3	6	1,20	6	46,19	309
	1,60	17,7	1,68	1,25	0,3	6	1,50	6	46,19	310
	1,85	17,7	1,93	1,25	0,3	6	1,75	6	46,19	311
9	1,10	20,0	1,18	0,90	0,3	6	1,00	6	47,51	313
	1,30	20,0	1,38	1,10	0,3	6	1,20	6	47,51	314
	1,60	20,0	1,68	1,25	0,3	6	1,50	6	47,51	315
	1,85	20,0	1,93	1,25	0,3	6	1,75	6	47,51	316
	1,60	21,7	1,68	1,25	0,3	6	1,50	6	48,06	318
	1,85	21,7	1,93	1,25	0,3	6	1,75	6	48,06	319
	2,15	21,7	2,23	1,75	0,3	6	2,00	6	48,06	320
	2,65	21,7	2,73	1,75	0,3	6	2,50	6	48,06	321
10	1,30	26,0	1,38	1,10	0,3	6	1,20	6	49,82	322
	1,60	26,0	1,68	1,25	0,3	6	1,50	6	49,82	324
	1,85	26,0	1,93	1,25	0,3	6	1,75	6	49,82	326
	2,15	26,0	2,23	1,75	0,3	6	2,00	6	49,82	328
	2,65	26,0	2,73	1,75	0,3	6	2,20	6	49,82	330
	3,15	26,0	3,23	2,20	0,3	6	3,00	6	49,82	332


Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling inserts for circlip grooves with chamfer

▲ both edges chamfered 0,1x45°

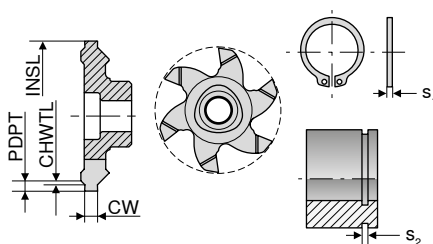

Ti500



Solid carbide

W2

Article no.

50 879 ...

EUR

Size	S ₂ H13 mm	INSL mm	CW _{-0,03} mm	PDPT mm	CHWTL mm	S ₁ mm	NOF		
7	1,10	16,0	1,18	0,50	0,10	1,00	6	48,61	292
	1,30	16,0	1,38	0,85	0,15	1,20	6	50,14	302
	1,60	16,0	1,68	1,00	0,15	1,50	6	50,14	304
	1,85	16,0	1,93	1,25	0,20	1,75	6	50,14	306
9	1,10	20,0	1,18	0,50	0,10	1,00	6	52,02	307
	1,30	20,0	1,38	0,85	0,15	1,20	6	52,02	308
	1,60	20,0	1,68	1,00	0,15	1,50	6	52,02	309
	1,60	21,7	1,68	1,00	0,15	1,50	6	52,02	312
	1,85	20,0	1,93	1,25	0,20	1,75	6	52,02	310
	1,85	21,7	1,93	1,25	0,20	1,75	6	52,02	314
	2,15	21,7	2,23	1,50	0,20	2,00	6	52,02	316
	2,65	21,7	2,73	1,75	0,20	2,50	6	52,02	318
10	1,30	26,0	1,38	0,85	0,15	1,20	6	54,11	322
	1,60	26,0	1,68	1,00	0,15	1,50	6	54,11	324
	1,85	26,0	1,93	1,25	0,20	1,75	6	54,11	326
	2,15	26,0	2,23	1,50	0,20	2,00	6	54,11	328
	2,65	26,0	2,73	1,75	0,20	2,50	6	54,11	330
	3,15	26,0	3,23	1,75	0,20	3,00	6	54,11	332

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys



Hardened materials

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling insert without profile

- ▲ with double sided edge break of 0,1x45°
- ▲ size 7: from 5,0 mm groove width with ground chip breaker
- ▲ size 10: from 6,5 mm groove width with ground chip breaker

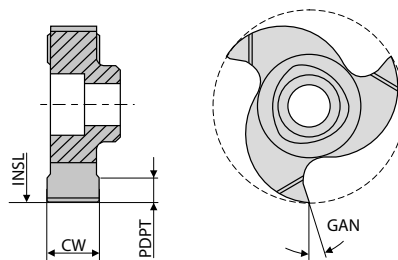

Ti500

Solid carbide
W2Article no.
50 875 ...

Size	CW $\pm 0,02$ mm	INSL mm	PDPT mm	GAN °	NOF	EUR	
6	1,5	11,7	2,25	6	3	34,28	302
	2,0	11,7	2,25	6	3	34,28	304
	2,5	11,7	2,25	6	3	35,05	306
	3,0	11,7	2,25	6	3	35,05	308
7	3,5	16,0	3,50	0	3	38,24	310
	3,5	16,0	3,50	8	3	38,24	312
	3,5	16,0	3,50	12	3	38,24	314
	5,0	16,0	3,50	0	3	43,20	316
	5,0	16,0	3,50	8	3	43,20	318
	5,0	16,0	3,50	12	3	43,20	320
10	4,0	25,0	5,70	0	3	39,68	330
	4,0	25,0	5,70	8	3	39,68	332
	4,0	25,0	5,70	12	3	39,68	334
	5,0	25,0	5,70	8	3	46,29	337
	6,5	25,0	5,70	0	3	48,50	340
	6,5	25,0	5,70	8	3	48,50	342
	6,5	25,0	5,70	12	3	48,50	344
	8,0	25,0	5,70	0	3	53,79	350
	8,0	25,0	5,70	8	3	53,79	352
	8,0	25,0	5,70	12	3	53,79	354



Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{im} is used. Details on → Page 72+73.

Milling insert without profile

▲ both edges chamfered 0,1x45°

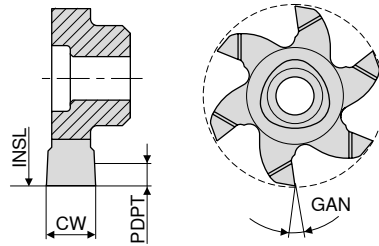Solid carbide
W2Article no.
50 876 ...

EUR



Size	CW $\pm 0,02$	INSL	PDPT	GAN	NOF		
	mm	mm	mm	°			
7	1,5	17,7	4,0	6	6	41,66	307
	2,0	17,7	4,0	6	6	41,88	308
	2,5	17,7	4,0	6	6	42,21	309
	3,0	16,0	3,5	6	6	47,83	302
	4,0	16,0	3,5	6	6	50,59	304
	5,0	16,0	3,5	6	6	52,14	306
9	1,5	21,7	5,0	6	6	48,06	314
	2,0	21,7	5,0	6	6	48,38	315
	2,5	21,7	5,0	6	6	48,38	316
	3,0	21,7	5,0	6	6	48,71	317
	3,0	20,0	4,2	6	6	48,71	311
	4,0	20,0	4,2	6	6	50,14	312
	5,0	20,0	4,2	6	6	53,01	313
10	1,5	27,7	6,8	6	6	59,19	330
	2,0	27,7	6,8	6	6	60,07	332
	2,5	27,7	6,8	6	6	60,07	334
	3,0	26,0	6,2	6	6	50,59	322
	3,0	27,7	6,8	6	6	60,94	336
	4,0	26,0	6,2	6	6	53,46	324
	5,0	26,0	6,2	6	6	53,68	326
	6,5	26,0	6,2	6	6	55,00	328

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling inserts for radius milling

Solid carbide
W2Article no.
50 886 ...


EUR

Size	CRE mm	INSL mm	PDPT mm	NOF		
6	1,100	9,6	1,20	3	35,91	702
	0,788	11,7	2,25	3	35,91	704
	1,100	11,7	2,25	3	35,91	708
	1,190	11,7	2,25	3	35,91	706
7	0,788	17,7	4,20	6	45,39	712
	1,100	17,7	4,20	6	45,39	714
9	0,785	21,7	5,00	6	54,71	720
	1,000	21,7	5,00	6	54,71	722
	1,200	21,7	5,00	6	54,71	724
	1,400	21,7	5,00	6	54,71	726
	1,500	21,7	5,00	6	54,71	728

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

Milling inserts for chamfering and deburring

Solid carbide
W2Article no.
50 884 ...

EUR



Size	PDPT mm	INSL mm	NOF		
6	1,2	9,6	3	32,62	292
	1,5	11,7	3	32,62	294
7	1,9	16,0	6	49,38	302
	1,3	17,7	6	49,48	304
9	1,9	20,0	6	51,14	312
	1,6	21,7	6	49,82	314
10	2,1	26,0	6	54,11	322

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

Thread milling insert – Partial profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!



Ti500



Solid carbide
W2



Size	TP mm	INSL mm	CF mm	NOF	Article no. 50 882 ... EUR	
6	1 - 3	11,7	0,10	3	47,29	292
7	1 - 3	17,7	0,10	6	53,01	306
	1 - 4	16,0	0,10	6	53,46	302
	2,5 - 4	16,0	0,25	6	53,01	304
9	1 - 2	21,7	0,10	6	53,89	314
	1 - 3	20,0	0,10	6	53,89	312
	2 - 4	21,7	0,15	6	53,89	316
10	1 - 3	26,0	0,10	6	57,42	322
	2,5 - 5	26,0	0,25	6	56,98	324

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Full profile



Ti500

Solid carbide
W2

Size	TP mm	INSL mm	PDPT mm	NOF	Article no. 50 881 ... EUR	
6	1	9,6	0,572	3	57,64	292
	1,5	9,6	0,875	3	57,64	293
	2	10,5	1,157	3	57,64	296
7	1,5	16,0	0,875	6	66,02	302
	2	16,0	1,157	6	66,02	304
	2,5	16,0	1,430	6	66,02	306
	3	16,0	1,702	6	66,02	310
	M20x2,5	16,0	1,430	6	70,87	308 ¹⁾
9	1,5	20,0	0,875	6	67,67	312
	2	20,0	1,157	6	67,67	314
	M24x3	20,0	1,702	6	67,67	316 ¹⁾
10	1,5	26,0	0,875	6	70,31	322
	2	26,0	1,157	6	70,31	324
	3	26,0	1,702	6	70,31	330
	3,5	26,0	1,982	6	70,31	332
	4	26,0	2,263	6	70,31	334
	4,5	26,0	2,553	6	70,31	336
	5	26,0	2,836	6	69,66	337
	M30x3,5	24,0	1,982	6	69,66	331 ¹⁾
	M36x4	26,0	2,263	6	69,66	335 ¹⁾

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•



1) profile corrected

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Full profile

▲ 50 883 322 for threads > 1"



Ti500

Solid carbide
W2Article no.
50 883 ...

EUR

Size	TPI	TP	INSL	PDPT	NOF		
6	19	1,337	9,6	0,871	3		
7	14	1,814	17,7	1,177	6	64,37	308
	14	1,814	16,0	1,177	6	65,69	304
	11	2,309	16,0	1,494	6	66,02	302
	10	2,540	16,0	1,646	6	65,69	306
9	14	1,814	20,0	1,177	6	67,67	316
	11	2,309	20,0	1,494	6	67,67	314
10	11	2,309	26,0	1,494	6	70,31	322

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•



→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

7

Thread milling insert – Full profile

▲ DIN 103



Ti500



Solid carbide

W2

Article no.
50 872 ...

EUR

Size	TP mm	INSL mm	PDPT mm	NOF	Thread		
6	2	11,7	1,25	3	Tr 16x2 - Tr 20x2	62,94	292
	3	11,0	1,75	3	Tr 18x3 - Tr 20x3	62,94	294
	4	12,0	2,25	3	Tr 20x4	62,94	296 ¹⁾
7	3	14,0	1,75	3	Tr 24x3 - Tr 32x3	85,84	302 ²⁾
	5	15,3	2,75	3	Tr 28x5 - Tr 36x5	85,84	306 ³⁾
	5	15,3	2,75	3	Tr 26x5	85,84	304 ³⁾
	6	16,2	3,50	3	Tr 34x6 - Tr 42x6	85,84	310 ²⁾
	6	16,2	3,50	3	Tr 30x6 - Tr 32x6	85,84	308 ²⁾
10	5	25,0	2,75	3	Tr 44x5 - Tr 48x5	108,70	322 ⁴⁾
	7	22,0	3,75	3	Tr 38x7 - Tr 42x7	108,70	324 ⁴⁾
	7	22,0	3,75	3	Tr 44x7	108,70	326 ¹⁾
	8	25,0	4,50	3	Tr 46x8 - Tr 48x8	125,90	328 ⁴⁾
	8	25,0	4,50	3	Tr 50x8 - Tr 52x8	125,90	330 ⁴⁾
	9	25,0	5,00	3	Tr 55x9 - Tr 60x9	125,90	332 ⁴⁾
	10	25,0	5,50	3	Tr 65x10 - Tr 80x10	125,90	334 ⁴⁾

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys

Hardened materials



- 1) profile corrected
 2) Not suitable for the 50 805 011 and 50 805 010 holders
 3) Not suitable for the 50 805 011 and 50 805 010 holders / profile corrected
 4) Not suitable for the 50 805 026, 50 805 025 and 50 805 024 holders

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!



Ti500

Solid carbide
W2Article no.
50 886 ...

EUR



Size	TPI	INSL	PDPT	NOF		
	1/"	mm	mm			
6	12,0	9,6	1,228	3	57,64	202
	11,0	10,5	1,355	3	57,64	204
	10,0	11,7	1,485	3	57,64	206
7	9,0	16,0	1,577	6	65,69	212
9	8,0	18,0	1,809	6	67,67	222
	7,0	20,0	2,043	6	67,67	224
10	6,0	24,0	2,454	6	69,66	232
	5,0	26,0	2,979	6	69,66	234
	4,5	26,0	3,289	6	69,66	236

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!



Ti500

Solid carbide
W2Article no.
50 886 ...


EUR

Size	Thread	INSL	PDPT	NOF		
		mm	mm			
6	1/2 - 20	9,6	0,733	3	57,64	302
	9/16 - 18	10,5	0,827	3	57,64	304
	3/4 - 16	11,7	0,945	3	57,64	306
7	7/8 - 14	17,7	1,071	6	64,37	312
9	1 - 12	20,0	1,228	6	64,37	322

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

Gear cutters, DIN 5480


▲ Z_w = Tooth Number Wave

Ti500



Size	Wave	Module	Z_w	CW	INSL	PDPT	NOF	Solid carbide W2	
								Article no.	
7	W11	0,80	12	3	15,85	0,80	6	50 874 ...	
	W14	0,80	16	3	16,00	0,80	6	EUR	
	W16	0,80	18	3	16,00	0,80	6	87,62	011
	W20	0,80	24	3	16,00	0,80	6	87,62	014
	W24	1,25	18	4	16,00	1,25	6	87,62	016
	W25	2,00	11	7	16,00	2,00	3	87,62	020
	W30	1,25	22	4	16,00	1,25	6	94,45	024
	W30	1,25	20	5	16,00	1,25	6	108,10	025
	W35	2,00	16	5	16,00	2,00	6	94,45	031
	W42	1,25	32	4	16,00	1,25	6	94,45	030
	W50	2,00	24	5	16,00	2,00	6	97,22	035
								94,45	042
								97,22	050

Gear cutters, DIN 5481

▲ Z_w = Tooth Number Wave

Ti500



Size	Wave	Z_w	CW	INSL	CRE	PDPT	NOF	Solid carbide W2	
								Article no.	
10	26 x 30	35	3	26	0,3	1,638	6	50 874 ...	
	40 x 44	38	3	26	0,4	1,940	6	EUR	
								87,62	126
								87,62	140

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70


i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Gear cutters, DIN 5482

▲ Z_w = Tooth Number Wave



Ti500





								Solid carbide	
								W2	
Size	Wave	Module	Z _w	CW	INSL	PDPT	NOF	Article no.	
								50 874 ...	
								EUR	
7	15 x 12	1,60	8	3,0	16	1,50	6	97,22	215
	17 x 14	1,60	9	5,0	16	1,50	6	87,62	217
	20 x 17	1,60	12	5,0	16	1,50	6	87,62	220
	25 x 22	1,60	14	5,0	16	1,65	6	97,22	225
10	35 x 31	1,75	18	6,5	26	2,00	6	101,20	235
	55 x 50	2,00	26	6,5	26	2,75	6	101,20	255
Steel									●
Stainless steel									●
Cast iron									●
Non ferrous metals									●
Heat resistant alloys									●
Hardened materials									●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Polygon circular end milling cutter

- ▲ for maximum machining depth, note insert width (CW)
- ▲ size 6 = for INSL 9,6; 10,5; 11,7; 12
- ▲ size 7 = for INSL 16; 17,7
- ▲ size 9 = for INSL 18; 20; 21,7
- ▲ size 10 = for INSL 24; 25; 26; 27,7

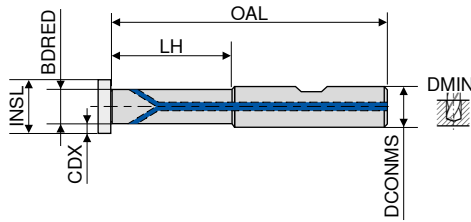


Size	LH	CDX	DCONMS _{n6}	OAL	BDRED	DMIN	torque moment Nm	HM W1	
	mm	mm	mm	mm	mm	mm		Article no. 50 805 ...	Article no. 50 805 ...
6	20,00	2,25	12	67,5	7,0	12	1,0	EUR	050 ¹⁾
	20,00	2,25	12	67,5	7,0	12	1,0		
	20,00	2,25	12	67,5	7,0	12	1,0		
	30,00	2,25	12	80,0	7,0	12	1,0		
	30,00	2,25	12	80,0	7,0	12	1,0		
	40,00	2,25	12	100,0	7,0	12	1,0		
	40,00	2,25	12	100,0	7,0	12	1,0		
7	20,90	4,00	12	67,4	9,0	18	1,1	EUR	002 ¹⁾
	21,00	4,00	12	67,4	9,0	18	1,1		
	21,00	4,00	12	67,4	9,0	18	1,1		
	36,00	4,00	12	82,4	9,0	18	1,1		
	36,00	4,00	12	82,4	9,0	18	1,1		
		4,00	12	122,5	12,0	18	1,1		
		4,00	12	82,4	12,0	18	1,1		
9	29,75	5,00	16	80,0	11,5	22	3,8	EUR	070 ¹⁾
	30,00	5,00	16	80,0	11,5	22	3,8		
	30,00	5,00	16	80,0	11,5	22	3,8		
	50,00	5,00	16	100,0	11,5	22	3,8		
	50,00	5,00	16	100,0	11,5	22	3,8		
10	20,50	5,70	16	105,0	15,5	28	5,5	EUR	012 ¹⁾
	20,50	6,80	16	149,7	15,5	28	5,5		
	20,50	6,80	20	175,4	15,5	28	5,5		
	30,40	6,80	16	79,6	13,6	28	5,5		
	30,50	6,80	16	79,6	13,6	28	5,5		
	30,50	6,80	16	79,6	13,6	28	5,5		
	45,50	6,80	16	94,6	13,6	28	5,5		
	45,50	6,80	16	94,6	13,6	28	5,5		
	60,50	6,80	16	109,6	13,6	28	5,5		
	60,50	6,80	16	109,6	13,6	28	5,5		


1) Steel version

Spare parts

Size	Article no. 80 950 ...			Article no. 70 960 ...		
	EUR			EUR		
6	T08 - IP	10,20	125	M2,5x7	6,27	246
7	T08 - IP	10,20	125	M3x13	6,27	231
9	T15 - IP	11,89	128	M4x13	6,27	236
10	T20 - IP	12,54	129	M5x13,5	6,27	243




Key D



Clamping screw

Polygon circular screw-in milling cutter

- ▲ size 7 = for INSL 16; 17,7
- ▲ size 10 = for INSL 25; 26
- ▲ steel version

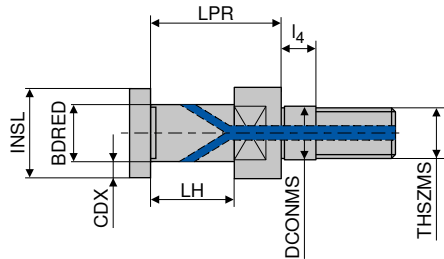


Size	CDX	LH	DCONMS _{h6}	LPR	THSZMS	TQX	BDRED	l ₄	torque moment	W1
	mm	mm	mm	mm		Nm	mm	mm	Nm	Article no.
7	3,5	16,0	8,5	26,0	M8	25	9,0	5,5	1,1	50 799 ...
10	5,7	25,5	12,5	38,5	M12	60	13,6	5,0	5,5	199,30 002
										199,30 012

Spare parts



Size	Article no.	EUR	Article no.	EUR
7	T08 - IP	10,20	M3x13	6,27
10	T20 - IP	12,54	M5x13,5	6,27

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for circlip grooves



CWX500

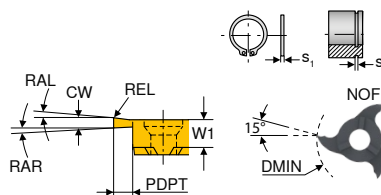


Size	DMIN	S ₂ H13	CW ^{-0,02}	PDPT	W1	RAR	REL	S ₁	NOF	W2 Article no. 53 006 ...	
	mm	mm	mm	mm	mm	°	mm	mm		EUR	
10	10	0,70	0,74	1,5	3,50	1		0,60	3	33,40	070
	10	0,80	0,84	1,5	3,50	1		0,70	3	33,40	080
	10	0,90	0,94	1,5	3,50	1		0,80	3	33,40	090
	10	1,10	1,21	1,5	3,50	3		1,00	3	29,86	110
	10	1,30	1,41	1,5	3,50	3	0,10	1,20	3	29,86	130
	10	1,60	1,71	1,5	3,50	3	0,10	1,50	3	29,86	160
	12	1,10	1,21	2,5	3,50	3		1,00	3	29,86	112
	12	1,30	1,41	2,5	3,50	3	0,10	1,20	3	29,86	132
	12	1,60	1,71	2,5	3,50	3	0,10	1,50	3	29,86	162
18	18	0,70	0,74	1,5	5,75	1		0,60	3	34,06	270
	18	0,80	0,84	1,7	5,75	1		0,70	3	34,06	280
	18	0,90	0,94	1,9	5,75	1		0,80	3	34,06	290
	18	1,10	1,21	3,5	5,75	3		1,00	3	31,96	310
	18	1,30	1,41	3,5	5,75	3	0,10	1,20	3	31,96	330
	18	1,60	1,71	3,5	5,75	3	0,10	1,50	3	31,96	360
22	22	0,70	0,74	1,5	5,70	1		0,60	3	36,15	470
	22	0,80	0,84	1,7	5,70	1		0,70	3	35,48	480
	22	0,90	0,94	1,9	5,70	1		0,80	3	32,41	490
	22	1,00	1,04	2,1	5,70	1		0,90	3	34,28	500
	22	1,10	1,21	2,5	5,70	1		1,00	3	34,28	510
	22	1,30	1,41	4,5	5,70	3	0,10	1,20	3	32,62	530
	22	1,60	1,71	4,5	5,70	3	0,10	1,50	3	32,62	560
	22	1,85	1,96	4,5	5,70	3	0,15	1,75	3	32,62	585
	22	2,15	2,26	4,5	5,70	3	0,15	2,00	3	32,62	615
	22	2,65	2,76	4,5	5,70	3	0,15	2,50	3	32,62	665
	22	3,15	3,26	4,5	5,70	3	0,20	3,00	3	32,62	415
	22	4,15	4,26	4,5	5,70	3	0,20	4,00	3	32,62	515
	22	5,15	5,26	4,5	5,70	3	0,20	5,00	3	32,62	605

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○



→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

MiniMill – Milling insert for circlip grooves with chamfer facet



CWX500

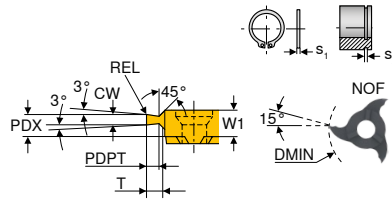


Size	DMIN	s_2 H13	CW ^{-0,02}	T	PDPT	W1	PDX	REL	s_1	NOF	W2 Article no. 53 006 ...	
	mm	mm	mm	mm	mm	mm	mm	mm	mm		EUR	
22	22	1,10	1,21	0,50	0,49	5,85	5,07		1,00	3	35,48	805
	22	1,30	1,41	0,70	0,67	5,85	5,17		1,20	3	35,48	807
	22	1,30	1,41	0,85	0,83	5,85	5,17		1,20	3	35,48	808
	22	1,60	1,71	0,85	0,83	5,85	5,07		1,50	3	35,48	809
	22	1,60	1,71	1,00	0,97	5,85	5,07		1,50	3	35,48	810
	22	1,85	1,96	1,25	1,23	5,85	5,19	0,15	1,75	3	35,48	812
	22	2,15	2,26	1,50	1,47	5,85	5,34	0,15	2,00	3	35,48	815
	22	2,65	2,76	1,75	1,72	5,85	5,09	0,15	2,50	3	35,48	817
	22	2,65	2,76	1,50	1,47	5,85	5,09	0,15	2,50	3	35,48	816
	22	3,15	3,26	1,75	1,72	5,85	5,34	0,20	3,00	3	35,48	818
	22	4,15	4,26	2,50	2,47	5,85	5,34	0,20	4,00	3	35,48	825
	22	4,15	4,26	2,00	1,97	5,85	5,34	0,20	4,00	3	35,48	820




Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○

→ v_c/f_z Page 71When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for groove milling



CWX500




Size	DMIN	CW ^{+0,02}	PDPT	W1	REL	NOF	W2	
							Article no.	53 007 ...
	mm	mm	mm	mm	mm		EUR	
10	10	1,0	1,5	3,50		3	33,40	010
	10	1,5	1,5	3,50	0,2	3	29,86	015
	10	2,0	1,5	3,50	0,2	3	29,86	020
	10	2,5	1,5	3,50	0,2	3	29,86	025
	12	1,5	2,0	3,50	0,2	6	51,69	114
	12	1,5	2,5	3,50	0,2	3	29,86	115
	12	2,0	2,0	3,50	0,2	6	51,69	119
	12	2,0	2,5	3,50	0,2	3	29,86	120
	12	2,5	2,5	3,50	0,2	3	29,86	125
14	14	1,0	2,5	4,50		3	34,06	210
	14	1,5	2,5	4,50	0,2	3	31,30	215
	14	2,0	2,5	4,50	0,2	3	31,30	220
	14	2,5	2,5	4,50	0,2	3	31,30	225
	16	1,5	3,5	4,50	0,2	3	31,30	315
	16	2,0	3,5	4,50	0,2	3	31,30	320
	16	2,5	3,5	4,50	0,2	3	31,30	325
18	18	1,5	3,5	5,75	0,1	6	58,52	414
	18	1,5	3,5	5,75	0,2	3	31,96	415
	18	2,0	3,5	5,75	0,2	6	58,52	419
	18	2,0	3,5	5,75	0,2	3	31,96	420
	18	2,5	3,5	5,75	0,2	6	58,52	424
	18	2,5	3,5	5,75	0,2	3	31,96	425
	18	3,0	3,5	5,75	0,2	6	58,52	429
	18	3,0	3,5	5,75	0,2	3	31,96	430
	18	4,0	3,5	5,75	0,2	3	31,96	440
22	22	1,0	4,5	6,20	0,1	6	57,31	810
	22	1,5	4,5	6,20	0,1	6	56,21	815
	22	1,5	4,5	5,70	0,2	3	33,40	515
	22	2,0	4,5	5,70	0,2	3	33,40	520
	22	2,0	4,5	6,20	0,2	6	56,21	820
	22	2,5	4,5	5,70	0,2	3	33,40	525
	22	2,5	4,5	6,20	0,2	6	56,21	825
	22	3,0	4,5	5,70	0,2	3	33,40	530
	22	3,0	4,5	6,20	0,2	6	56,21	830
	22	3,5	4,5	5,70	0,2	3	33,40	535
	22	4,0	4,5	5,70	0,2	3	33,40	540
	22	4,0	4,5	6,20	0,2	6	56,21	840
28	25	2,0	5,0	6,50	0,2	3	38,24	620
	25	2,5	5,0	6,50	0,2	3	38,24	625
	25	3,0	5,0	6,50	0,2	3	38,24	630
	25	3,5	5,0	6,50	0,2	3	38,24	635
	25	4,0	5,0	6,50	0,2	3	38,24	640
	28	1,0	6,5	6,25	0,1	6	63,71	610
	28	1,5	6,5	6,25	0,1	6	62,82	615
	28	1,5	6,5	6,50	0,2	3	38,24	715
	28	2,0	6,5	6,25	0,2	6	63,60	721
	28	2,0	6,5	6,50	0,2	3	38,24	720
	28	2,5	6,5	6,25	0,2	6	64,26	726
	28	2,5	6,5	6,50	0,2	3	38,24	725
	28	3,0	6,5	6,50	0,2	3	38,24	730
	28	3,0	6,5	6,25	0,2	6	64,92	731
	28	3,5	6,5	6,50	0,2	3	38,24	735
	28	4,0	6,5	6,25	0,2	6	66,34	741
	28	4,0	6,5	6,50	0,2	3	38,24	740
	28	5,0	6,5	6,50	0,2	3	38,24	750
	28	6,0	6,5	6,50	0,2	3	39,01	760

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	○
Hardened materials	○




→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for groove milling (specialist for aluminium)



CWX500



Size	DMIN	CW ^{+0,02}	PDPT	W1	REL	NOF
	mm	mm	mm	mm	mm	
28	32	2,0	8,5	6,5	0,2	3
	32	2,5	8,5	6,5	0,2	3
	32	3,0	8,5	6,5	0,2	3

W2

Article no.
53 007 ...


EUR	
42,66	920
42,66	925
42,66	930

Steel
Stainless steel
Cast iron
Non ferrous metals
Heat resistant alloys
Hardened materials




→ v_c/f_z Page 71

7

MiniMill – Milling insert for groove milling with full radius



CWX500



Size	DMIN	CW ^{+0,03}	PDPT	W1	REL	NOF
	mm	mm	mm	mm	mm	
10	12	2,2	2,5	3,50	1,1	3
14	16	2,2	3,5	4,60	1,1	3
18	18	2,2	3,5	5,75	1,1	3
22	22	1,0	4,5	5,75	0,5	3
	22	1,6	4,5	5,75	0,8	3
	22	2,0	4,5	5,75	1,0	3
	22	2,4	4,5	5,75	1,2	3
	22	2,8	4,5	5,75	1,4	3
	22	3,0	4,5	5,75	1,5	3
	22	4,0	4,5	5,75	2,0	3
	22	4,4	4,5	5,75	2,2	3
	22	5,0	4,5	5,75	2,5	3

W2

Article no.
53 008 ...


EUR	
38,24	011
38,91	111
39,68	211
39,68	305
40,34	308
39,68	310
41,11	312
39,68	314
39,68	315
39,68	320
40,88	322
42,43	325

Steel
Stainless steel
Cast iron
Non ferrous metals
Heat resistant alloys
Hardened materials




→ v_c/f_z Page 71

When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for groove milling, cross-pitched



CWX500




Size	DMIN	INSL	CW _{+0,02}	PDPT	W1	REL	NOF	W2	
								Article no.	
	mm	mm	mm	mm	mm	mm		53 015 ...	
10	12	11,7	1,5	2,0	3,5	0,2	6	51,47	114
	12	11,7	2,0	2,0	3,5	0,2	6	51,47	119
14	16	15,7	1,5	2,5	4,5	0,2	6	52,14	314
	16	15,7	2,0	2,5	4,5	0,2	6	52,14	319
	16	15,7	2,5	2,5	4,5	0,2	6	52,14	324
18	18	17,7	2,0	4,0	5,8	0,2	6	58,19	419
	18	17,7	2,5	4,0	5,8	0,2	6	58,19	424
	18	17,7	3,0	4,0	5,8	0,2	6	58,19	429
	20	19,7	2,0	5,0	5,8	0,2	6	58,19	469
	20	19,7	2,5	5,0	5,8	0,2	6	58,19	474
	20	19,7	3,0	5,0	5,8	0,2	6	58,19	479
22	22	21,7	2,0	4,5	6,2	0,2	6	56,21	820
	22	21,7	2,5	4,5	6,2	0,2	6	56,21	825
	22	21,7	3,0	4,5	6,2	0,2	6	56,21	830
	22	21,7	4,0	4,5	6,2	0,2	6	56,21	840
	37	36,7	1,5	12,0	6,2	0,1	6	76,49	865
	37	36,7	2,0	12,0	6,2	0,2	6	77,59	870
28	25	24,8	2,5	5,0	6,4	0,2	6	65,58	626
	25	24,8	3,0	5,0	6,4	0,2	6	66,34	631
	25	24,8	4,0	5,0	6,4	0,2	6	67,67	641
	25	24,8	5,0	5,0	6,4	0,2	6	69,87	651
	25	24,8	6,0	5,0	6,4	0,2	6	74,17	661
	28	27,7	2,5	6,5	6,2	0,2	6	63,92	726
	28	27,7	3,0	6,5	6,2	0,2	6	64,58	731
	28	27,7	4,0	6,5	6,2	0,2	6	66,02	741
	28	27,7	5,0	6,5	6,2	0,2	6	66,89	751
	28	27,7	6,0	6,5	6,2	0,2	6	66,89	761
	35	34,7	2,0	10,0	6,2	0,2	6	70,21	770
	35	34,7	2,5	10,0	6,2	0,2	6	70,87	775
	35	34,7	3,0	10,0	6,2	0,2	6	71,53	780

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○




→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

MiniMill – Milling insert for groove milling and chamfering



CWX500



Size	DMIN	CF _{+0,03}	PDPT	W1	KCH	PDX	NOF	W2	
	mm	mm	mm	mm	°	mm		Article no. 53 009 ...	
10	10	0,2	0,35	3,60	15	1,80	6	EUR 52,02	015
	10	0,2	0,45	3,60	20	1,80	6	EUR 52,02	020
	10	0,2	0,70	3,60	30	1,80	6	EUR 52,02	030
	10	0,2	1,20	3,60	45	1,80	6	EUR 52,02	045
	12	1,2	0,80	3,50	45	1,20	3	EUR 25,68	035
14	16	1,4	1,20	4,50	45	1,60	3	EUR 26,33	145
18	18	2,5	1,40	5,85	45	1,70	3	EUR 26,88	258
	18	0,2	2,20	5,75	45	3,00	6	EUR 57,64	259
22	22	2,0	1,70	5,85	45	2,00	3	EUR 28,43	358
	22	0,2	2,50	6,40	45	3,90	6	EUR 56,43	463
	22	3,0	3,00	9,40	45	3,25	3	EUR 29,86	394 ¹⁾
28	28	0,2	1,90	6,05	45	3,75	6	EUR 62,71	560
Steel ●									
Stainless steel ●									
Cast iron ●									
Non ferrous metals ●									
Heat resistant alloys ○									
Hardened materials ○									

1) use clamping screw 73 082 006


→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.





MiniMill – Milling insert for part-off

▲ PDPT = 12,0 mm in combination with holder 53 003 624

▲ reduce feed rate by 50 %



CWX500



Size	DMIN	CW ^{+0,02}	PDPT	W1	REL	NOF	W2 Article no. 53 013 ... EUR	
	mm	mm	mm	mm	mm			
22	37	0,5	12	5,6		6	91,37	705 ¹⁾
	37	0,6	12	5,7		6	91,04	706 ¹⁾
	37	0,8	12	6,0		6	89,82	708 ¹⁾
	37	1,0	12	6,2	0,1	6	87,29	710
	37	1,5	12	6,2	0,1	6	74,39	715

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○

1) the end face is not ground free to the center

→ v_c/f_z Page 71

MiniMill – Set for cut off





▲ size 22



					W1 Article no. 53 014 ... EUR	
Tool	Designation	Article no.	Hole-Ø mm	Piece		
Inserts	Milling inserts for separating	53 013 715	37	2		
Tool holder	Endmill short	53 003 624		1		
Screw	M5 x 12	73 082 005		1	210,90	990
Tightening Key	T20			1		

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{im} is used. Details on → Page 72+73.

MiniMill – Milling insert for internal thread milling – Partial profile



CWX500



Size	Thread _{min}	TP mm	DMIN mm	CF mm	PDPT mm	W1 mm	PDX mm	NOF	W2	
									Article no. 53 010 ...	
10	M12	1,0 - 1,75	9,8	0,13	1,08	3,20	2,4	6	58,31	017
	M14	1,0 - 1,75	11,7	0,13	1,08	3,60	2,8	3	39,68	010
	M14	1,0 - 2,0	10,1	0,13	1,25	3,20	2,2	6	58,31	021
	M14	1,0 - 2,0	11,7	0,13	1,25	3,60	2,8	3	39,68	020
	M16	1,5 - 2,75	11,0	0,19	1,67	3,20	2,0	6	58,31	027
	M16	1,5 - 2,75	11,7	0,19	1,67	3,60	2,4	3	39,68	015
	M16	2,0 - 3,0	11,1	0,25	1,78	3,20	1,9	6	58,31	029
14	M16	2,0 - 3,0	11,7	0,25	1,78	3,60	2,2	3	39,68	030
	M18	1,0 - 1,75	15,7	0,12	1,08	4,60	3,8	3	40,34	210
	M18	1,0 - 2,0	15,7	0,12	1,25	4,60	3,5	3	40,34	220
	M20	1,5 - 2,75	15,7	0,18	1,67	4,60	3,5	3	40,34	215
18	M22	2,5 - 3,0	15,7	0,31	1,78	4,60	3,4	3	40,34	230
	M22	1,0 - 1,75	17,7	0,12	1,03	5,85	5,0	3	43,09	410
	M22	1,0 - 2,0	17,7	0,12	1,19	5,85	4,7	3	40,34	412
	M22	1,0 - 2,0	17,7	0,12	1,19	5,85	5,0	6	68,00	416
	M22	1,5 - 2,75	17,7	0,19	1,62	5,85	4,6	3	40,34	415
	M24	2,0 - 3,0	17,7	0,25	1,73	5,85	4,4	3	40,34	425
	M24	2,0 - 3,5	17,7	0,25	2,06	5,85	4,2	3	40,34	455
	M24	2,0 - 3,5	17,7	0,25	2,06	5,85	4,3	6	69,44	434
	M24	2,0 - 3,75	17,7	0,25	2,22	5,85	4,2	3	40,34	420
	M24	2,5 - 5,0	17,7	0,31	2,98	5,85	3,8	3	40,34	430
22	M24	3,0 - 5,5	17,7	0,38	3,25	5,85	4,2	3	40,34	435
	M27	1,0 - 2,0	21,7	0,12	1,19	5,85	4,6	3	41,77	610
	M27	1,0 - 2,0	21,7	0,12	1,19	6,20	5,0	6	66,68	710
	M27	1,5 - 2,75	21,7	0,18	1,62	5,85	4,5	3	41,77	615
	M27	2,0 - 3,75	21,7	0,25	2,22	5,85	4,2	3	41,77	620
	M27	2,5 - 4,5	21,7	0,25	2,70	5,85	3,7	3	43,09	655
	M27	2,0 - 4,5	21,7	0,25	2,70	6,05	4,2	6	67,89	755
	M30	2,5 - 5,0	21,7	0,31	2,98	5,85	3,8	3	41,77	630
28	M30	3,5 - 6,0	21,7	0,44	3,52	5,85	3,4	3	43,09	640
	M30	3,5 - 6,5	21,7	0,44	3,84	5,85	3,2	3	43,09	645
	M33	1,0 - 2,0	27,7	0,12	1,20	6,60	4,5	3	48,83	820
	M33	1,5 - 2,5	27,7	0,18	1,49	6,60	4,3	3	48,83	825
	M33	1,5 - 2,5	27,7	0,19	1,60	6,10	5,0	6	73,07	826
	M36	2,5 - 5,0	27,7	0,38	2,93	6,10	2,3	6	73,07	850
	M36	2,5 - 5,0	27,7	0,37	2,93	6,60	4,0	3	48,83	840
28	M39	4,0 - 6,0	27,7	0,62	3,37	6,60	3,6	3	48,83	860

Steel

Stainless steel

Cast iron





Non ferrous metals

Heat resistant alloys

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for internal thread milling – Full profile



CW500







Size	Thread _{min}	TP	DMIN	CF	PDPT	W1	PDX	NOF	W2	
									Article no.	
									53 011 ...	
		mm	mm	mm	mm	mm	mm		EUR	
18	M22	1,50	17,7	0,18	0,81	5,85	4,8	3	41,77	415
	M22	1,75	17,7	0,20	0,95	5,85	4,7	3	44,53	417
	M22	2,00	17,7	0,25	1,08	5,85	4,6	3	44,53	420
	M24	2,50	17,7	0,31	1,35	5,85	4,4	3	44,53	425
	M27	3,00	17,7	0,37	1,62	5,85	4,3	3	44,53	430
	M27	3,50	17,7	0,43	1,89	5,85	4,0	3	44,53	435
22	M24	1,50	21,7	0,19	0,81	5,85	4,8	3	43,87	615
	M24	1,50	21,7	0,19	0,81	6,20	5,3	6	66,57	715
	M27	1,75	21,7	0,22	0,95	6,20	5,2	6	69,99	717
	M27	1,75	21,7	0,22	0,95	5,85	4,7	3	43,87	617
	M27	2,00	21,7	0,25	1,08	5,85	4,6	3	45,85	620
	M27	2,00	21,7	0,25	1,08	6,20	5,0	6	69,99	720
	M30	3,00	21,7	0,37	1,62	5,85	4,3	3	45,85	630
	M30	3,00	21,7	0,37	1,62	6,20	4,8	6	71,31	730
	M30	3,50	21,7	0,43	1,89	5,85	4,0	3	49,26	635
	M33	4,00	21,7	0,50	2,16	5,85	3,9	3	49,26	640
	M33	4,00	21,7	0,50	2,16	6,20	4,4	6	75,06	740
	M33	4,50	21,7	0,56	2,43	5,85	3,7	3	49,26	645

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	○

→ v_c/f_z Page 71

MiniMill – Milling insert for internal thread milling – Full profile



CW500




Size	Thread _{min}	TP	DMIN	TPI	W1	PDX	PDPT	CRE	RETL	RETR	NOF	W2	
												Article no.	
												53 012 ...	
		mm	mm	1/''	mm	mm	mm	mm	mm	mm		EUR	
10	G 3/8"	1,34	11,7	19	3,60	2,5	0,860	0,18	0,18	0,18	3	49,16	113
	G 1/2"	1,81	11,7	14	3,60	2,3	1,160	0,24	0,24	0,24	3	49,16	118
	G 1"	2,31	11,7	11	3,60	2,0	1,480	0,31	0,31	0,31	3	49,16	123
18	-	1,34	17,7	19	5,85	4,9	0,856	0,18	0,18	0,18	3	42,43	219
	G 3/4"	1,81	17,7	14	5,85	4,6	1,160	0,24	0,24	0,24	3	42,43	214
	G 1"	2,31	17,7	11	5,85	4,4	1,480	0,31	0,31	0,31	3	42,43	211
22	G 1"	2,31	21,7	11	5,85	4,0	1,480	0,31	0,31	0,31	3	50,69	311
	-	3,17	21,7	8	5,85	3,5	2,030	0,43	0,43	0,43	3	54,89	308
	BSW 1 1/2"	4,23	21,7	6	5,85	3,1	2,710	0,58	0,58	0,58	3	54,89	306

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	○

→ v_c/f_z Page 71

MiniMill – Circular milling cutter, extra short


▲ steel Version

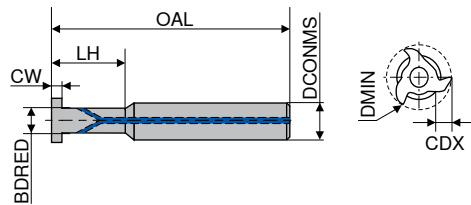Steel
W1

Size	DCONMS _{h6}	BDRED	OAL	LH	DMIN	CW	CDX	torque moment Nm	Article no. 53 004 ...	
	mm	mm	mm	mm	mm	mm	mm		EUR	
10	10	6,0	60	15,2	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	104,90	015
14	10	8,0	60	17,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	104,90	217
	13	8,0	70	25,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	108,10	225
18	10	9,0	60	17,0	17,7	≤5,6	3,5	4,5	104,90	417
	13	9,0	70	25,0	17,7	≤5,6	3,5	4,5	108,10	425
22	10	11,3	60	10,7	21,7	≤9,15	4,5	7,0	108,10	610
	13	11,3	70	25,7	21,7	≤9,15	4	7,0	112,20	625
28	13	14,0	70	10,7	27,7	≤10	6,5	7,0	108,10	810
	20	14,0	100	35,7	27,7	≤10	6,5	7,0	112,20	835

MiniMill – Circular milling cutter, short

▲ steel Version

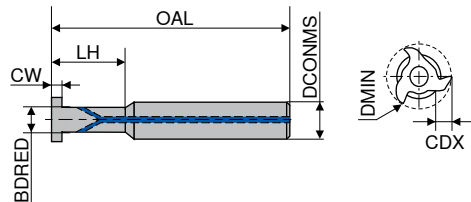

A

Steel
W1



B

Steel
W1


Size	DCONMS _{h6}	BDRED	OAL	LH	DMIN	CW	CDX	torque moment Nm	Article no. 53 002 ...		Article no. 53 003 ...	
	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
10	16	6	80	12,0	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	121,60	012	121,60	012
14	16	8	80	16,0	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	121,60	216	121,60	216
18	16	9	80	18,0	17,7	≤5,6	3,5	4,5	118,50	418	118,50	418
22	16	12	80	24,0	21,7	≤9,15	4,5	7,0	119,60	624	119,60	624
28	20	14	100	35,7	27,7	≤10	6,5	7,0			112,20	835

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

MiniMill – Circular milling cutter, vibration-damped

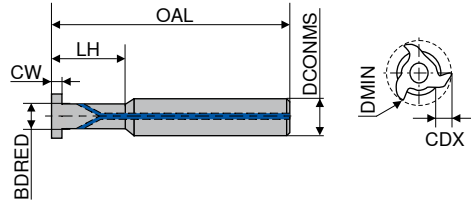

Size	DCONMS _{h6}	BDRED	OAL	LH	DMIN	CW	CDX	torque moment Nm	HM W1		HM W1	
	mm	mm	mm	mm	mm	mm	mm		Article no. 53 001 ...	EUR	Article no. 53 000 ...	EUR
10	12	6,0	80	21	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	156,80	021	156,80	021
	12	6,0	90	30	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	168,50	030	168,50	030
	12	6,0	100	42	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	191,80	042	191,80	042
	12	7,3	90	30	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	177,00	130	177,00	130
	16	7,3	100	25	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	260,70	025	260,70	025
14	12	8,0	95	29	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	156,80	229	156,80	229
	12	8,0	110	42	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	169,50	242	169,50	242
	12	8,0	120	56	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	191,80	256	191,80	256
	12	9,5	110	42	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	191,80	342	191,80	342
	16	9,5	110	33	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	238,50	233	238,50	233
18	12	9,0	100	32	17,7	≤5,6	3,5	4,5	195,00	432	195,00	432
	12	9,0	100	45	17,7	≤5,6	3,5	4,5	218,30	445	218,30	445
	12	9,0	120	64	17,7	≤5,6	3,5	4,5	258,50	464	258,50	464
	16	9,0	93	25	17,7	≤5,6	3,5	4,5	218,30	425	218,30	425
	16	9,0	100	32	17,7	≤5,6	3,5	4,5	229,90	532	229,90	532
	16	9,0	110	45	17,7	≤5,6	3,5	4,5	270,30	545	270,30	545
	16	9,0	130	64	17,7	≤5,6	3,5	4,5	310,50	564	310,50	564
	16	13,0	110	64	17,7	≤5,6	1,5	4,5	238,50	465	238,50	465
	16	13,0	130	66	17,7	≤5,6	1,5	4,5	302,00	466	302,00	466
22	12		100	42	21,7	≤9,15	4,5	7,0	171,70	642	171,70	642
	12		130	60	21,7	≤9,15	4,5	7,0	203,50	660	203,50	660
	16	11,5	90	30	21,7	≤9,15	4,5	7,0	218,30	630	218,30	630
	16	12,0	100	42	21,7	≤9,15	4,5	7,0	226,80	742	226,80	742
	16	12,0	130	60	21,7	≤9,15	4,5	7,0	271,30	760	271,30	760
	16	12,0	160	85	21,7	≤9,15	4,5	7,0	307,30	685	307,30	685
	20	16,0	110	45	21,7	≤9,15	2,5	7,0	330,60	645	330,60	645
28	16	14,3	100	42	27,7 / 24,8	≤10	6,5 / 5	7,0	240,60	842	240,60	842
	16	14,3	130	60	27,7 / 24,8	≤10	6,5 / 5	7,0	286,10	860	286,10	860
	16	14,3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	333,80	885	333,80	885
	20	13,5	104	35	27,7 / 24,8	≤10	6,5 / 5	7,0	297,80	835	297,80	835
	20	14,3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	380,40	985	380,40	985



Key D



Clamping screw




Clamping screw

Spare parts

Size	Article no. 80 950 ...		Article no. 73 082 ...		Article no. 73 082 ...	
	T08	EUR	T10	EUR	M2,6	EUR
10	T08	7,80	110		M2,6	3,15
14	T10	9,14	112		M3,5	3,15
18	T15	9,28	113		M4	3,15
22	T20	9,95	114	M5	M5	3,15
28	T20	9,95	114		M5	3,15

i Clamping screw 73 082 006 only for insert 53 009 394.

Milling inserts for circlip grooves without chamfer

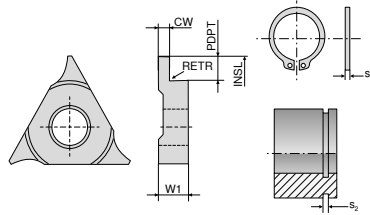

Ti500




Size	S ₂ H13 mm	INSL mm	W1 mm	CW _{-0,03} mm	PDPT mm	RETR mm	S ₁ mm	Solid carbide W2	
								Article no. 50 853 ...	
04	0,90	7,9	2,34	0,98	0,70	0,3	0,80	EUR 39,68	300
03	0,90	10,6	2,34	0,98	0,70	0,3	0,80	32,73	302
	1,10	10,6	2,34	1,18	0,90	0,3	1,00	32,73	304
	1,30	10,6	2,34	1,38	1,10	0,3	1,20	32,73	306
	1,60	10,6	2,34	1,68	1,25	0,3	1,50	32,73	308
	1,85	10,6	2,34	1,93	1,25	0,3	1,75	32,73	310
02	0,90	17,5	3,50	0,98	0,70	0,3	0,80	29,54	312
	1,10	17,5	3,50	1,18	0,90	0,3	1,00	29,54	314
	1,30	17,5	3,50	1,38	1,10	0,3	1,20	29,54	316
	1,60	17,5	3,50	1,68	1,25	0,3	1,50	29,54	318
	1,85	17,5	3,50	1,93	1,25	0,3	1,75	29,54	320
	2,15	17,5	3,50	2,23	1,75	0,3	2,00	29,54	322
	2,65	17,5	3,50	2,73	1,75	0,3	2,50	29,54	324
	3,15	17,5	3,50	3,23	2,20	0,3	3,00	29,54	326
01	0,90	23,0	4,00	0,98	0,70	0,3	0,80	29,54	328
	1,10	23,0	4,00	1,18	0,90	0,3	1,00	29,54	330
	1,30	23,0	4,00	1,38	1,10	0,3	1,20	29,54	332
	1,60	23,0	4,00	1,68	1,25	0,3	1,50	29,54	334
	1,85	23,0	4,00	1,93	1,25	0,3	1,75	29,54	336
	2,15	23,0	4,00	2,23	1,75	0,3	2,00	29,54	338
	2,65	23,0	4,00	2,73	1,75	0,3	2,50	29,54	340
	3,15	23,0	4,00	3,23	2,20	0,3	3,00	29,54	342


Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	○

→ v_c/f_z Page 70When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling inserts for circlip grooves with chamfer

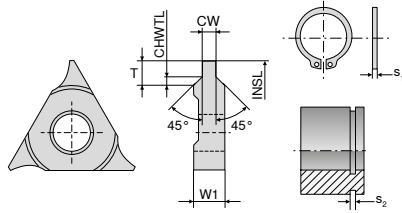

Ti500

Solid carbide
W2Article no.
50 852 ...

Size	S ₂ H13 mm	INSL mm	W1 mm	CW _{-0.03} mm	T mm	CHWTL mm	S ₁ mm		
03	1,10	10,6	2,34	1,18	0,50	0,10	1,00		
								EUR 34,61	302
02	1,10	17,5	3,50	1,18	0,50	0,10	1,00	31,41	312
	1,30	17,5	3,50	1,38	0,85	0,15	1,20	31,41	314
	1,60	17,5	3,50	1,68	1,00	0,15	1,50	31,41	316
	1,85	17,5	3,50	1,93	1,25	0,20	1,75	31,41	317
	2,15	17,5	3,50	2,23	1,50	0,20	2,00	31,41	318
	2,65	17,5	3,50	2,73	1,50	0,20	2,50	31,41	319
01	1,10	23,0	4,00	1,18	0,50	0,10	1,00	31,41	320
	1,30	23,0	4,00	1,38	0,70	0,15	1,20	31,41	321
	1,30	23,0	4,00	1,38	0,85	0,15	1,20	31,41	322
	1,60	23,0	4,00	1,68	1,00	0,15	1,50	31,41	324
	1,60	23,0	4,00	1,68	0,85	0,15	1,50	31,41	323
	1,85	23,0	4,00	1,93	1,25	0,20	1,75	31,41	325
	2,15	23,0	4,00	2,23	1,50	0,20	2,00	31,41	326
	2,65	23,0	4,00	2,73	1,75	0,20	2,50	31,41	328
	2,65	23,0	4,00	2,73	1,50	0,20	2,50	31,41	327
	3,15	23,0	4,00	3,32	1,75	0,20	3,00	31,41	329

Steel

●

Stainless steel

●

Cast iron

●

Non ferrous metals

●

Heat resistant alloys



●

Hardened materials

○

→ v_c/f_z Page 70When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling inserts without profile, ground ready-for-use

System
300

Ti500





Size	CW ^{+0,02}	INSL	W1	Solid carbide W2	Article no. 50 851 ...
	mm	mm	mm		
04	2,00	7,9	2,34	EUR 39,68	302
03	2,34	10,6	2,34	32,73	304
	3,00	10,6	3,00	34,61	306
02	3,50	17,5	3,50	29,54	312
	5,00	17,5	5,00	34,61	314
	6,00	17,5	6,00	38,24	316
01	4,00	23,0	4,00	36,38	322 ¹⁾
	6,50	23,0	6,50	36,38	324 ¹⁾

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	○


1) with circular milling cutter 50 800 090 PDPT = 3,0 mm

→ v_c/f_z Page 70

Milling inserts for chamfering and deburring

System
300

Ti500






Size	PDPT	INSL	W1	Solid carbide W2	Article no. 50 857 ...
	mm	mm	mm		
03	1,50	10,6	3,0	EUR 32,73	304
02	2,50	17,5	5,0	32,73	314
01	3,25	23,0	6,5	32,73	322 ¹⁾

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	○

1) with circular milling cutter 50 800 090 PDPT = 3,0 mm

→ v_c/f_z Page 70When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Partial profile



Ti500

Solid carbide
W2Article no.
50 855 ...EUR
36,38 314




36,38 324

Size	TP	INSL	W1
	mm	mm	mm
02	1 - 3,5	17,5	3,5
01	1 - 4,0	23,0	4,0

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

→ v_c/f_z Page 70

Thread milling insert – Full profile



Ti500

Solid carbide
W2Article no.
50 859 ...EUR
45,08 304

45,08 308

45,08 310

Size	TP	INSL	W1	PDPT
	mm	mm	mm	mm
03	1,0	10,6	2,34	0,578
	1,5	10,6	2,34	0,864
	2,0	10,6	2,34	1,159
02	1,0	17,5	3,50	0,578
	1,5	17,5	3,50	0,864
	2,0	17,5	3,50	1,159
	2,5	16,0	3,50	1,444
	2,5	17,5	3,50	1,444
	3,0	17,5	3,50	1,728
01	1,0	23,0	4,00	0,578
	1,5	23,0	4,00	0,864
	2,0	23,0	4,00	1,159
	2,5	23,0	4,00	1,444
	3,0	23,0	4,00	1,728
	3,5	23,0	4,00	2,023
	4,0	23,0	4,00	2,308
	4,5	23,0	6,50	2,602
	5,0	23,0	6,50	2,887
	6,0	23,0	6,50	3,467

45,08 311

45,08 312

45,08 314

48,50 317¹⁾

45,08 316

55,55 318

46,74 320

46,74 322

46,74 324

46,74 326

46,74 328

46,74 330

46,74 332

53,79 334

53,79 336

53,79 338²⁾



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

1) M20x2,5 – profile corrected

2) with circular milling cutter 50 800 090 PDPT = 3,0 mm

→ v_c/f_z Page 70

Thread milling insert – Full profile



Size	TP	TPI	INSL	W1	PDPT	Solid carbide W2	
	mm	1/''	mm	mm	mm	Article no.	
02	1,814	14	17,5	3,5	1,162	50 858 ...	
	2,309	11	17,5	3,5	1,494	EUR 45,08	314
01	2,309	11	23,0	4,0	1,494	EUR 45,08	312
						EUR 46,74	322


Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	○

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Circular milling cutter

▲ size refers to milling inserts

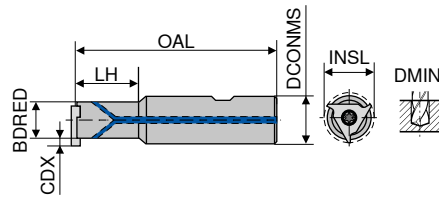

HB

W1

Article no.
50 800 ...

Size	INSL	CDX	LH	DCONMS _{h6}	OAL	BDRED	DMIN	torque moment Nm	
04	7,9	0,35	17,2	10	57,20	7,1	8	0,9	EUR 127,20 015 ¹⁾
03	10,6	1,60	17,2	10	57,20	7,4	11	0,9	EUR 127,20 020 ¹⁾
	10,6	1,60	34,2	10	74,20	7,4	11	0,9	EUR 184,40 025 ²⁾
02	17,5	2,60	28,7	12	74,05	12,0	20	3,8	EUR 134,60 030
	17,5	2,60	63,7	12	108,70	12,0	20	3,8	EUR 291,40 045 ²⁾
01	23,0	3,45	38,5	16	87,00	16,1	25	5,5	EUR 139,90 050
	23,0	3,45	67,5	16	116,00	16,1	25	5,5	EUR 147,30 070
	23,0	3,00	88,5	16	137,00	17,0	25	5,5	EUR 322,20 090 ²⁾

1) without through coolant

2) carbide version

Spare parts







for Article no.

		Article no. 80 950 ...	Article no. 70 960 ...
		EUR	EUR
50 800 050	T20 - IP	12,54 129	M5x15 6,27 234
50 800 070	T20 - IP	12,54 129	M5x15 6,27 234
50 800 090	T20 - IP	12,54 129	M5x15 6,27 234
50 800 030	T15 - IP	11,89 128	M4x12,3 6,27 233
50 800 045	T15 - IP	11,89 128	M4x12,3 6,27 233
50 800 020	T06 - IP	10,39 123	M2x9 4,17 232
50 800 025	T06 - IP	10,39 123	M2x9 4,17 232
50 800 015	T06 - IP	10,39 123	M2x9 4,17 232

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

▲ can be used on both sides (except for INSL 10,4)






INSL	TP	Solid carbide W2		Solid carbide W2		Solid carbide W2		Solid carbide W2	
mm	mm	Article no. 50 890 ...	EUR	Article no. 50 890 ...	EUR	Article no. 50 891 ...	EUR	Article no. 50 891 ...	EUR
10,4	0,50	60,51	100						
	0,75	60,51	101						
	1,00	48,50	102	58,74	302				
	1,25	48,50	103						
	1,50	48,50	104	58,74	304				
11,0	0,50	41,88	120						
	0,75	52,79	121						
	1,00	41,88	122	51,03	322				
	1,25	41,88	123						
	1,50	41,88	124	50,14	324				
16,0	0,50	61,71	140						
	0,75	49,16	141						
	1,00	49,16	142	63,37	342	49,16	142	59,96	342
	1,25	49,16	143			49,16	143		
	1,50	49,16	144	59,96	344	49,16	144	59,96	344
	1,75	49,16	145			49,16	145		
	2,00	49,16	146	59,96	346	49,16	146	59,96	346
27,0	1,00	94,12	162	109,50	362	94,12	162	109,50	362
	1,25	94,12	163			94,12	163		
	1,50	94,12	164	109,50	364	94,12	164	109,50	364
	1,75	94,12	165						
	2,00	94,12	166	109,50	366	94,12	166	109,50	366
	2,50	94,12	167			94,12	167		
	3,00	94,12	168	109,50	368	94,12	168	109,50	368
	3,50	94,12	169			94,12	169		
	4,00	94,12	170			94,12	170		
Steel			•		•		•		•
Stainless steel					•				•
Cast iron			•		•		•		•
Non ferrous metals			•		•		•		•
Heat resistant alloys									
Hardened materials									

→ v_c/f_z Page 69When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

▲ can be used on both sides (except for INSL 10,4)


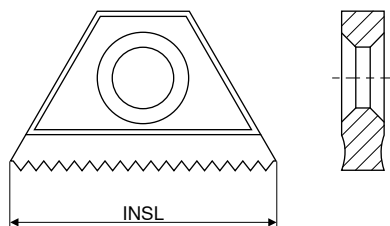



INSL	TPI	TP	Solid carbide W2		Solid carbide W2	
mm	1/"	mm	Article no.		Article no.	
10,4	19	1,337	50 895 ...		50 895 ...	
			EUR		EUR	
			48,50	100	58,74	300
16,0	14	1,814	49,16	142	58,74	342
	11	2,309	49,16	144	58,74	344
27,0	11	2,309	94,12	166	134,50	366
Steel				•		•
Stainless steel						•
Cast iron				•		•
Non ferrous metals				•		•
Heat resistant alloys						
Hardened materials						

→ v_c/f_z Page 69

Thread milling insert

▲ can be used on both sides (except for INSL 10,4)

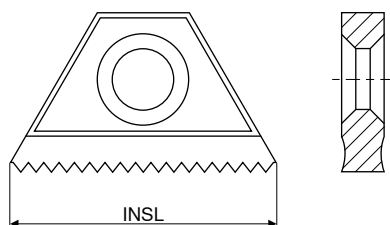




INSL	TPI	TP	Solid carbide W2	
mm	1/"	mm	Article no.	
10,4	20	1,270	50 892 ...	
	18	1,411	EUR	
			48,50	100
			48,50	102
16,0	16	1,588	49,16	144
	12	2,117	49,16	146
27,0	12	2,117	94,12	166
	8	3,175	94,12	168
Steel				•
Stainless steel				
Cast iron				•
Non ferrous metals				•
Heat resistant alloys				
Hardened materials				

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

▲ double sided

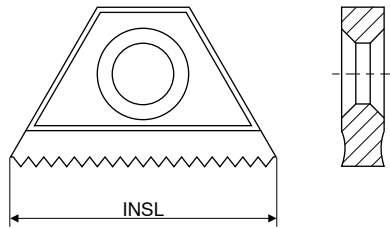Solid carbide
W2Article no.
50 896 ...




INSL	TPI	TP		
mm	1/"	mm		
11	18	1,411	EUR 50,14	122
16	18	1,411	EUR 59,07	142
	16	1,588	EUR 49,16	144

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 69

Thread milling insert

▲ double sided

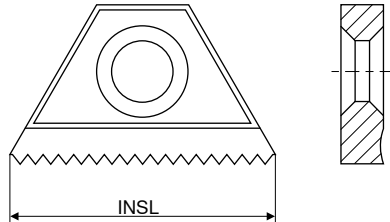Solid carbide
W2Article no.
50 897 ...

INSL	TPI	TP		
mm	1/"	mm		
16	14,0	1,814	EUR 49,16	142
	11,5	2,209	EUR 49,16	144
27	11,5	2,209	EUR 94,12	164
	8,0	3,175	EUR 94,12	166

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•


→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

i Note! Thread milling inserts are marked R (right-hand thread) and L (left-hand thread). The standard tool holder cannot be used to produce a left-hand thread!
Tool holder for left-hand thread available on special request.

Circular milling cutter

▲ INSL refers to milling inserts

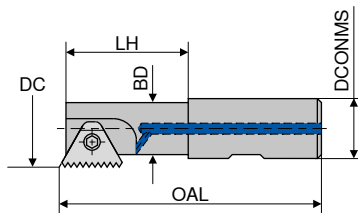

B

W1


INSL	BD	LH	DCONMS _{h6}	OAL	DC	torque moment	Article no.
mm	mm	mm	mm	mm	mm	Nm	50 843 ...
10,4	6,8	12	12	69	9,0	0,9	101
	6,8	17	20	84	9,0	0,9	102
11,0	8,9	12	12	70	11,5	1,2	111
	8,9	20	20	85	11,5	1,2	112
16,0	13,6	22	16	90	17,0	2,5	161
	16,6	43	20	95	20,0	2,5	162
	18,6	25	25	125	22,0	2,5	163
27,0	24,0	52	25	110	30,0	9,0	271
	31,0	58	32	120	37,0	9,0	273
	24,0	92	25	150	30,0	9,0	272
	31,0	98	32	160	37,0	9,0	274

Pilot hole diameter for circular end mill 50 843 ...


BD	TP in mm									
	0,5 mm 48 G/"	0,75 mm 32 G/"	1,0 mm 24 G/"	1,25 mm 20 G/"	1,5 mm 16 G/"	2,0 mm 12 G/"	2,5 mm 10 G/"	3,0 mm 8 G/"	3,5 mm 7 G/"	4,0 mm 6 G/"
6,8	9,5	10	10,7	11,4	12					
8,9	12	12,5	13,2	13,9	14,5					
13,6	17,6	18,2	19	19,6	20	21				
16,6	20,7	21,4	22	22,6	23	24				
18,6	22,7	23,4	24	24,6	25	26				
24,0	30,7	31,4	32	32,8	33,5	34,6	36,6	39	42	45
31,0	38	38,6	39,5	40,4	41	42	44	46,5	49	52

Spare parts
INSL

							Article no.		Article no.
							80 950 ...		70 950 ...
10,4							EUR		EUR
11	T07	7,80	109	M2,2x5,0	1,88	200			
16	T08	7,80	110	M2,6x6,5	1,88	201			
27	T10	9,14	112	UNC5-40 x 8	1,88	202			
	T25	10,22	115	M5x15	2,92	203			





Key D



Clamping screw

Circular milling cutter NPT

▲ INSL refers to milling inserts

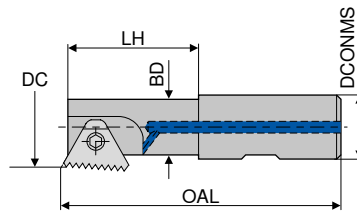

B W1

Article no.
50 844 ...

EUR

187,70 161

205,50 162


261,10 271

281,00 272


INSL	BD	Thread	LH	DCONMS _{h6}	OAL	DC	torque moment		
mm	mm		mm	mm	mm	mm	Nm		
16	12,5	NPT 1/2	22	16	90	15,5	2,5		
	15,0	NPT 3/4 - 1 1/4	23	20	85	19,0	2,5		
27	24,0	NPT 1 1/2 - 2	52	25	110	30,0	9,0		
	31,0	NPT > 2	58	32	120	37,0	9,0		

Spare parts
INSL

			Article no. 80 950 ...		Article no. 70 950 ...	
			EUR		EUR	
16	T10	9,14	112	UNC5-40 x 8	1,88	202
27	T25	10,22	115	M5x15	2,92	203





Key D



Clamping screw

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

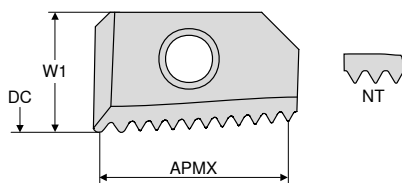

Solid carbide

W2

Article no.
50 863 ...

EUR

DC	TP	W1	APMX	NT		
mm	mm	mm	mm			
12	1,0	7,5	12,0	13	43,20	300
	1,5	7,5	10,5	8	43,20	302
17	1,0	11,0	16,0	17	43,20	310
	1,5	11,0	16,5	12	43,20	312
	2,0	11,0	16,0	9	43,20	314
20	1,0	7,5	12,0	13	43,20	320
	1,5	7,5	10,5	8	43,20	322
25	1,0	11,0	16,0	17	43,20	330
	1,5	11,0	16,5	12	43,20	332
	2,0	11,0	16,0	9	43,20	334

Steel

Stainless steel

Cast iron



Non ferrous metals

Heat resistant alloys

hardened materials

→ v_c/f_z Page 70

Thread milling insert

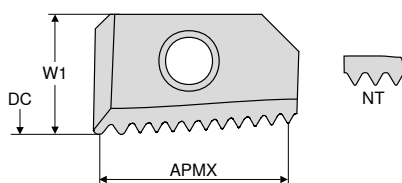

Solid carbide

W2

Article no.
50 864 ...

EUR

DC	TPI	W1	APMX	NT		
mm	1/"	mm	mm			
12	14	7,5	9,07	6	43,20	300
17	14	11,0	16,33	10	55,55	312 ¹⁾
	14	11,0	16,33	10	55,55	314 ²⁾
	11	11,0	16,16	8	55,55	310
25	14	11,0	16,33	10	55,55	332
	11	11,0	16,16	8	55,55	330

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys



hardened materials

1) Thread: 5/8 - 3/4 - 7/8

2) 1/2" Profile corrected

→ v_c/f_z Page 70

Circular milling cutter

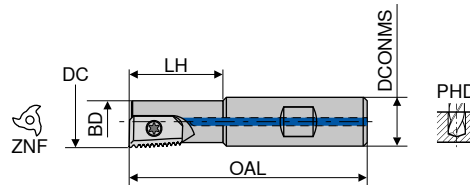

B []

W1

Article no.
50 842 ...

EUR


DC	LH	DCONMS _{h6}	OAL	BD	ZNF	PHD	torque moment		
mm	mm	mm	mm	mm		mm	Nm		
12	18	16	74,0	9,4	1	14	1,1	173,80	121
17	30	16	79,0	13,7	1	19	3,8	173,80	171
20	32	20	83,0	17,5	3	22	1,1	207,70	201
25	50	25	107,6	21,7	3	26	3,8	272,40	251
	85	25	142,6	21,7	3	26	3,8	715,30	252 ¹⁾

1) heavy metal version with mounted head


Spare parts

for Article no.

		Article no. 80 950 ...	Article no. 70 960 ...
		EUR	EUR
50 842 121	T08 - IP	10,20 125	M2,5x6,5 4,17 244
50 842 171	T15 - IP	11,89 128	M4x7,5 4,17 245
50 842 201	T08 - IP	10,20 125	M2,5x6,5 4,17 244
50 842 251	T15 - IP	11,89 128	M4x7,5 4,17 245
50 842 252	T15 - IP	11,89 128	M4x7,5 4,17 245






Key D



Clamping screw

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

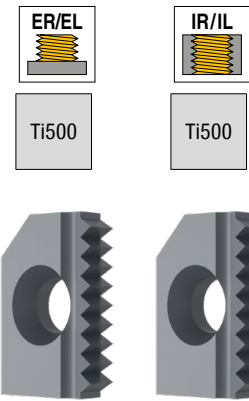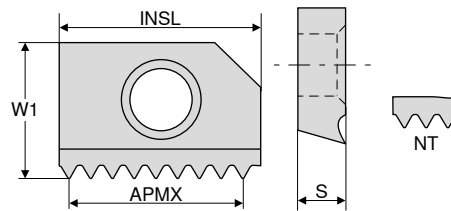



INSL	TP	W1	APMX	S	NT	Solid carbide W2	Solid carbide W2
mm	mm	mm	mm	mm		Article no. 50 887 ... EUR	Article no. 50 885 ... EUR
14,5	0,50	10,0	13,50	3,18	28		67,44 350
	0,75	10,0	13,50	3,18	19		67,44 352
	1,00	10,0	13,00	3,18	14	52,02	39,68 354
	1,25	10,0	12,50	3,18	11		52,02 356
	1,50	10,0	12,00	3,18	9	52,02	39,68 358
	1,75	10,0	12,25	3,18	8		52,02 360
	2,00	10,0	12,00	3,18	7	52,02	39,68 362
	2,50	10,0	10,00	3,18	5		46,74 364
	2,50	10,0	10,00	3,18	5		46,74 366 ¹⁾
15,0	3,00	10,5	12,00	3,18	5		55,55 370
	3,50	10,5	10,50	3,18	4		55,55 372
21,0	1,00	10,0	19,00	3,18	20		45,08 380
	1,50	10,0	19,50	3,18	14		45,08 382
	1,50	10,0	18,00	3,18	13	52,02	
	2,00	10,0	18,00	3,18	10		45,08 384
26,0	1,50	15,0	24,00	5,00	17		76,26 390
	2,00	15,0	24,00	5,00	13		76,26 392
	3,00	15,0	21,00	5,00	8		76,26 396
	3,50	15,0	20,00	5,00	7		112,40 398
	4,00	15,0	20,00	5,00	6		112,40 400
Steel						•	•
Stainless steel						•	•
Cast iron						•	•
Non ferrous metals						•	•
Heat resistant alloys							
Hardened materials							

1) M20x2,5 - profile corrected

→ v_c/f_z Page 70When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

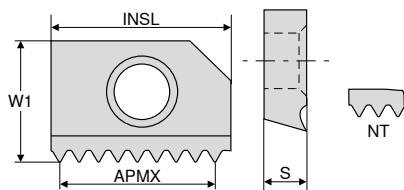

Solid carbide
W2Article no.
50 888 ...

INSL	TPI	TP	W1	APMX	S	NT		
mm	1/"	mm	mm	mm	mm		EUR	
14,5	18	1,411	10	11,28	3,18	9	43,20	310
	16	1,587	10	11,11	3,18	8	43,20	312
	14	1,814	10	12,69	3,18	8	43,20	314
	12	2,116	10	10,58	3,18	6	43,20	316
	11	2,309	10	11,54	3,18	6	43,20	318
21,0	14	1,814	10	18,14	3,18	11	52,02	320
	11	2,309	10	18,47	3,18	9	52,02	322
26,0	11	2,309	15	23,09	5,00	11	83,10	330

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

Thread milling insert

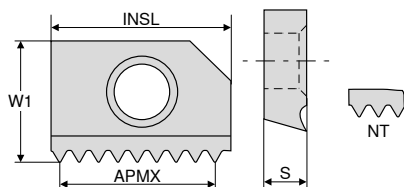Solid carbide
W2Article no.
50 894 ...

INSL	TPI	TP	W1	APMX	S	NT		
mm	1/"	mm	mm	mm	mm		EUR	
14,5	18	1,411	10	12,69	3,18	10	62,26	302
	16	1,587	10	11,11	3,18	8	62,26	304

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.


Thread milling insert

GZG

IR/IL

60°

UN

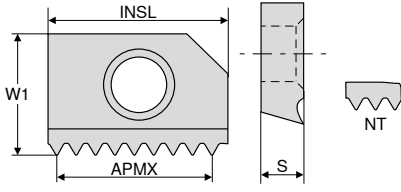

Ti500



Solid carbide

W2

Article no.

50 889 ...

EUR

INSL	TPI	TP	W1	APMX	S	NT	
mm	1/''	mm	mm	mm	mm		
14,5	18	1,411	10	12,69	3,18	10	64,15 310
	16	1,587	10	12,70	3,18	9	64,15 312
21,0	16	1,587	10	19,05	3,18	13	77,92 320
	14	1,814	10	18,14	3,18	11	77,92 322
	12	2,116	10	18,04	3,18	10	77,92 324

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys


Hardened materials

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Circular milling cutter

▲ INSL refers to milling inserts

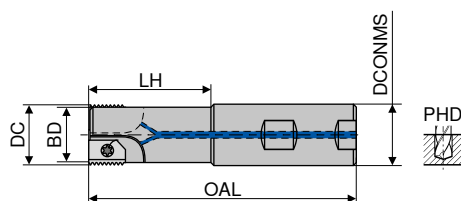

B

W1

Article no.
50 841 ...

EUR

INSL	DC	LH	DCONMS _{n6}	OAL	BD	ZNP	PHD	torque moment		
mm	mm	mm	mm	mm	mm		mm	Nm		
14,5	16	30,0	16	78	12,7	1	18,5	3,8	159,00	016
	16	50,0	16	98	12,7	1	18,5	3,8	248,00	017 ¹⁾
	20	60,0	20	110	16,8	1	23,0	3,8	188,70	020
	25	48,2	25	106	21,5	2	30,0	3,8	281,90	025
	25	92,2	25	150	21,5	2	30,0	3,8	602,00	026 ¹⁾
15,0	22	30,0	16	79	12,7	1	20,0	3,8	173,80	218
	27	48,2	25	106	21,5	2	32,0	3,8	281,90	227
	27	60,0	20	110	16,8	1	26,0	3,8	188,70	222
21,0	16	31,3	20	85	12,7	1	18,5	3,8	165,40	316
	22	32,8	25	92	18,7	1	26,0	3,8	173,80	322
	22	62,8	25	122	18,7	1	26,0	3,8	593,40	323 ¹⁾
	28	38,3	32	102	24,7	2	35,0	3,8	321,20	328
	28	78,3	32	142	24,5	2	35,0	3,8	887,00	327 ¹⁾
26,0	18	48,5	25	107	20,0	1	30,0	3,8	223,60	125

1) heavy metal version

Y7



Key D

2A



Clamping screw

Spare parts

for Article no.

	Article no. 80 950 ...	Article no. 70 960 ...
	EUR	EUR
50 841 016	T15 - IP 11,89 128	M4x6,9 6,27 237
50 841 017	T15 - IP 11,89 128	M4x6,9 6,27 237
50 841 020	T15 - IP 11,89 128	M4x7,5 4,17 245
50 841 025	T15 - IP 11,89 128	M4x8 6,27 242
50 841 026	T15 - IP 11,89 128	M4x8 6,27 242
50 841 218	T15 - IP 11,89 128	M4x6,9 6,27 237
50 841 227	T15 - IP 11,89 128	M4x8 6,27 242
50 841 222	T15 - IP 11,89 128	M4x6,9 6,27 237
50 841 316	T15 - IP 11,89 128	M4x6,9 6,27 237
50 841 322	T15 - IP 11,89 128	M4x6,9 6,27 237
50 841 323	T15 - IP 11,89 128	M4x8 6,27 242
50 841 328	T15 - IP 11,89 128	M4x8 6,27 242
50 841 327	T15 - IP 11,89 128	M4x8 6,27 242
50 841 125	T15 - IP 11,89 128	M4x11,5 6,27 241

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.


Thread milling insert – Partial profile

EAW



M

UN

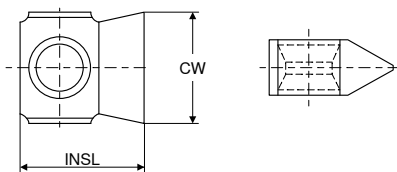

TiN

Solid carbide
W2Article no.
50 867 ...

EUR

52,57 115
52,57 225

DC	TP	TPI	CW	INSL
mm	mm	1/"	mm	mm
16,5	1,5 - 3,0	16 - 10	5	7,0
18	2,5 - 3,5	10 - 7	5	7,8



G

DC	TP	TPI	CW	INSL
mm	mm	1/"	mm	mm
16,5	1,814	14	5	7

W2

Article no.
50 868 ...

EUR

64,37 114


Thread milling insert – Partial profile

EAW




M

UN

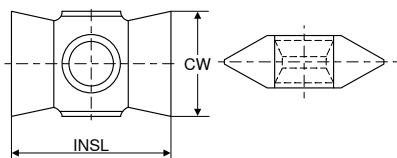

TiN

Solid carbide
W2Article no.
50 860 ...

EUR

39,46 315
39,46 325
44,53 415
44,53 425

DC	TP	TPI	CW	INSL
mm	mm	1/"	mm	mm
23,85	1,5 - 2,5	16 - 10	6,35	9,52
23,85	2,5 - 4,0	10 - 6	6,35	9,52
32,85	1,5 - 2,5	16 - 10	8,50	13,50
32,85	2,5 - 5,5	10 - 4,5	8,50	13,50



G

DC	TP	TPI	CW	INSL
mm	mm	1/"	mm	mm
23,85	2,309	11	6,35	9,52
32,85	2,309	11	8,50	13,50

W2

Article no.
50 861 ...

EUR

44,53 311
52,02 411

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys



Hardened materials

→ v_c/f_z Page 69

Circular milling cutter

Scope of supply:

including key

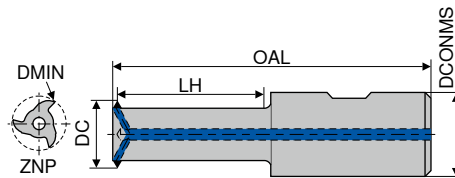

W1

Article no.
50 848 ...


DC	DMIN	TP	TPI	LH	DCONMS _{h6}	OAL	ZNP	torque moment	
mm	mm	mm	1/"	mm	mm	mm		Nm	
16,5 / 18,0	17,5 / 19,0	1,5 - 3,0	16 - 10	60	20	114	2	0,9	323,00 020
23,85	25,5	1,5 - 4,0	24 - 6	90	32	154	3	0,9	380,60 030
32,85	35,0	1,5 - 5,5	16 - 4,5	115	32	179	3	2,5	394,20 040

7


Spare parts

for Article no.

		Article no. 80 950 ...		Article no. 70 950 ...
		EUR		EUR
50 848 020	T07 - IP	10,22 124	M2,5x8,5	10,42 739
50 848 030	T07 - IP	10,22 124	M2,5x8,5	10,42 739
50 848 040	T09 - IP	11,24 126	M3x11	10,42 740



Key D



Clamping screw

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.


Thread milling insert – Partial profile

EWM




M

UN

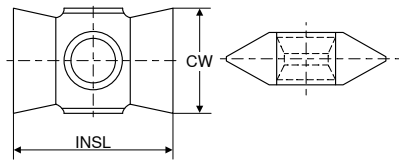

TiN

Solid carbide
W2Article no.
50 870 ...

EUR

50,37 515

50,37 530

55,76 615

55,76 630

89,06 760

DC	TP	TPI	CW	INSL
mm	mm	1/"	mm	mm
40,25	1,5 - 3,0	16 - 9	9,5	15,50
40,25	3,0 - 6,0	9 - 4	9,5	15,50
52,55 / 66,55	1,5 - 3,0	16 - 9	12,5	19,00
52,55 / 66,55	3,0 - 6,0	9 - 4	12,5	19,00
92	6,0 - 8,0	4	14,3	28,58



G

DC	TP	TPI	CW	INSL
mm	mm	1/"	mm	mm
40,25	2,309	11	9,5	15,5
52,55	2,309	11	12,5	19,0

W2

Article no.
50 871 ...

EUR

57,87 511

68,22 611


Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•

→ v_c/f_z Page 69When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Circular milling cutter

Scope of supply:

including key

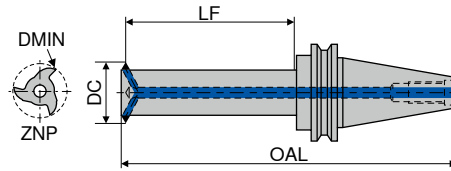

DIN 69871

W1


Article no.
50 849 ...

EUR	
817,90	148
793,80	048
911,20	064
934,20	164
1.284,00	080
1.495,00	115

DC	DMIN	TP	TPI	LF	OAL	Adapter	ZNP	torque moment
mm	mm	mm	1/"	mm	mm			Nm
40,25	43,0	1,5 - 6,0	16 - 4,0	145	280,5	SK 50	4	5,5
40,25	43,0	1,5 - 6,0	16 - 4,0	145	247,0	SK 40	4	5,5
52,55	56,0	1,5 - 6,0	16 - 4,0	195	279,6	SK 40	4	8,0
52,55	56,0	1,5 - 6,0	16 - 4,0	195	331,0	SK 50	4	8,0
66,55	70,5	1,5 - 6,0	16 - 4,0	260	398,0	SK 50	7	8,0
92,00	100,0	6,0 - 8,0	4,0	360	497,0	SK 50	7	8,0

Spare parts
DC

		Article no. 80 950 ...		Article no. 70 950 ...	
		EUR		EUR	
40,25	T15 - IP	11,89	128	M4x13	10,42 741
52,55	T20 - IP	12,54	129	M5x15	10,42 742
66,55	T20 - IP	12,54	129	M5x15	10,42 742
92	T20 - IP	12,54	129	M5x15	10,42 742





Key D



Clamping screw

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

MicroMill – Solid Carbide Circular End Milling Cutter

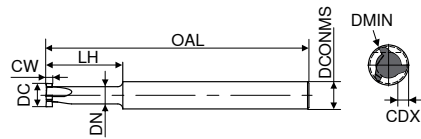

HA

Solid carbide
W1Article no.
53 050 ...

EUR

DC	CW $\pm 0,02$	CDX	LH	OAL	DN	DCONMS h_6	ZEFP	DMIN	
mm	mm	mm	mm	mm	mm	mm		mm	
5,8	0,7	0,8	15,2	58	3,8	6	3	6	55,99 070
	0,8	0,8	15,2	58	3,8	6	3	6	55,99 080
	0,9	0,8	15,2	58	3,8	6	3	6	55,99 090
	1,0	0,8	15,2	58	3,8	6	3	6	55,99 100
	1,5	0,8	15,2	58	3,8	6	3	6	55,99 150
7,8	0,7	1,2	25,4	68	5,0	8	3	8	70,65 170
	0,8	1,2	25,4	68	5,0	8	3	8	70,65 180
	0,9	1,2	25,4	68	5,0	8	3	8	70,65 190
	1,0	1,2	25,4	68	5,0	8	3	8	70,65 200
	1,5	1,2	25,4	68	5,0	8	3	8	70,65 250
	2,0	1,2	25,4	68	5,0	8	3	8	70,65 300

Steel

Stainless steel

Cast iron


Non ferrous metals

Heat resistant alloys

Hardened materials

→ v_c/f_z Page 71

MicroMill – Solid Carbide Circular End Milling Cutter

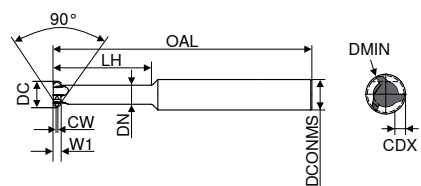

HA

Solid carbide
W1Article no.
53 051 ...

EUR

DC	W1	CW	CDX	LH	OAL	DN	DCONMS h_6	ZEFP	DMIN	
mm	mm	mm	mm	mm	mm	mm	mm		mm	
5,8	2	0,2	0,8	15	58	4,2	6	3	6	54,01 010
	2	0,2	0,8	25	68	4,2	6	3	6	68,56 020
7,8	2	0,2	1,2	25	68	5,0	8	3	8	83,21 110
	2	0,2	1,2	35	78	5,0	8	3	8	87,62 120

Steel

Stainless steel

Cast iron



Non ferrous metals

Heat resistant alloys

Hardened materials

→ v_c/f_z Page 71

MicroMill – Solid Carbide Circular Thread Milling Cutter – Full profile

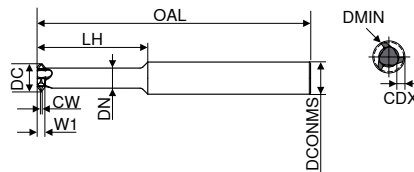

CW500



HA

Solid carbide

W1

Article no.

53 052 ...



EUR

Thread	TP	DC	W1	CW	CDX	LH	OAL	DN	DCONMS _{h6}	ZEFP	DMIN	
	mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	
M1,6	0,35	1,18	0,40	0,04	0,19	4,0	32	0,64	3	3	1,38	65,79 160
M1,8	0,35	1,38	0,50	0,04	0,19	5,0	32	0,70	3	3	1,58	65,02 180
M2	0,40	1,50	0,56	0,05	0,22	5,0	32	0,90	3	4	1,70	72,42 200
M2,5	0,45	1,95	0,60	0,06	0,25	6,0	32	1,15	3	4	2,15	71,65 250
M3	0,50	2,40	0,60	0,06	0,27	7,0	32	1,60	3	4	2,60	70,97 300
M3,5	0,60	2,80	0,74	0,08	0,33	8,0	32	1,80	3	4	3,00	69,44 350
M4	0,70	3,10	0,82	0,09	0,38	9,0	44	1,98	5	4	3,30	75,39 400
M5	0,80	3,60	0,98	0,10	0,43	10,0	44	2,20	5	4	3,80	73,18 500
M6	1,00	4,10	0,98	0,13	0,54	12,2	44	2,70	5	4	4,30	71,65 600

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 71

MicroMill – Solid Carbide Circular Thread Milling Cutter – Partial profile

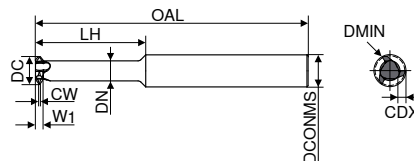

CW500



HA

Solid carbide

W1

Article no.

53 053 ...

EUR



TP	DC	W1	CW	CDX	LH	OAL	DN	DCONMS _{h6}	ZEFP	DMIN	
mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	
0,5 - 1,5	5,8	2	0,06	0,91	15,2	58	3,5	6	3	6	58,42 010
0,5 - 1,5	7,8	2	0,06	0,91	25,4	68	5,5	8	3	8	77,37 110
1,0 - 2,0	7,8	2	0,12	1,19	25,4	68	5,0	8	3	8	77,37 120

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{im} is used. Details on → Page 72+73.

Circular Thread Milling Cutter

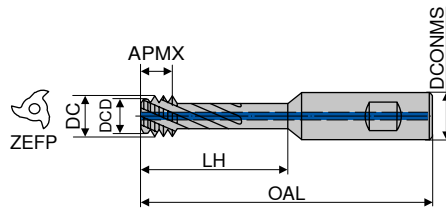

OSM



HB

Solid carbide
W1Article no.
50 815 ...



EUR	
190,70	060
215,00	080
216,00	100
242,50	120

DC	Thread	TP	APMX	LH	DCONMS _{h6}	DCD	OAL	ZEFP
mm		mm	mm	mm	mm	mm	mm	
4,51	M6x1 - M7x1	1,00	4,1	16	8	3,41	60	3
6,23	M8x1,25 - M9x1,25	1,25	5,1	21	10	4,91	71	4
7,75	M10x1,5 - M11x1,5	1,50	6,0	26	10	6,11	76	4
9,16	M12x1,75	1,75	7,0	31	12	7,21	86	4

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 68

Circular Thread Milling Cutter

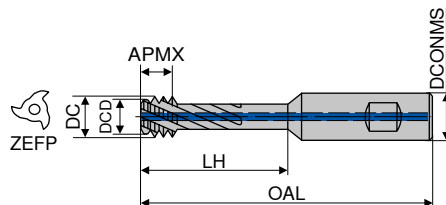

OSM



HB

Solid carbide
W1Article no.
50 821 ...

EUR	
276,60	060
303,10	080
306,40	100
328,50	120
351,60	140
441,90	180



DC	Thread	TP	APMX	LH	DCONMS _{h6}	DCD	OAL	ZEFP
mm		mm	mm	mm	mm	mm	mm	
4,51	M6x1 - M7x1	1,00	4,1	23	8	3,41	65	3
6,23	M8x1,25 - M9x1,25	1,25	5,1	30	10	4,91	80	4
7,75	M10x1,5 - M11x1,5	1,50	6,0	37	10	6,11	85	4
9,16	M12x1,75	1,75	7,0	43	12	7,21	100	4
11,08	M14x2 - M16x2	2,00	8,1	57	16	8,91	113	4
14,38	M18x2,5 - M20x2,5	2,50	10,0	71	20	11,71	129	5

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	○
Hardened materials	○

→ v_c/f_z Page 68

Circular Thread Milling Cutter

▲ note: left-hand cutting (M04)

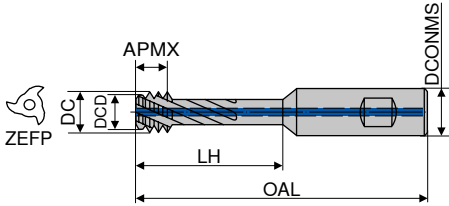

Solid carbide	
NEW	W1
Article no.	
50 840 ...	
EUR	
161,50	030 1)
161,70	040 1)
160,30	050 1)
160,20	060 1)
172,60	080
186,00	100
197,70	120
216,10	140

DC	Thread	TP	APMX	LH	DCONMS _{h6}	DCD	OAL	ZEFP
mm		mm	mm	mm	mm	mm	mm	
2,3	M3x0,5	0,50	2,0	7,0	6	2,10	51	4
3,0	M4x0,7	0,70	2,8	9,4	6	2,60	51	4
3,8	M5x0,8	0,80	3,2	11,6	6	3,40	51	4
4,6	M6x1 - M7x1	1,00	4,0	14,0	8	4,10	60	4
6,2	M8x1,25 - M10x1,25	1,25	5,0	19,0	10	5,60	71	4
7,8	M10x1,5 - M12x1,5	1,50	6,0	25,0	10	7,00	76	4
9,2	M12x1,75	1,75	7,0	31,0	12	8,30	86	4
11,1	M14x2 - M16x2	2,00	8,0	36,0	16	10,04	98	4

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	○
Hardened materials	●

1) without through coolant



→ v_c/f_z Page 68

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

i Caution: left-hand cutting (M04) → spindle rotation left!

Thread Milling Cutter

▲ available on request: M1 / M1,1 / M1,2 / M1,4 / M1,6 / M1,7 / M1,8 / M2 / M2,2 / M2,3 / M2,5 / M2,6 / M3

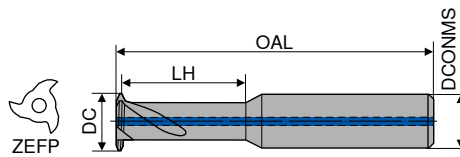



OSM	OSM
HA	HB
Solid carbide W1	Solid carbide W1
Article no. 50 846 ...	Article no. 50 847 ...
EUR	EUR
143,30	145,50
143,30	145,50
146,50	148,80
166,50	167,50
167,50	169,70
186,30	187,30

DC	Thread	TP	LH	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm			
3,15	M4	0,70	9	6	55	3		
4,00	M5	0,80	11	6	55	3		
4,80	M6 - M7	1,00	16	8	60	3		
6,40	M8 - M9	1,25	22	10	71	4		
8,00	M10 - M12	1,50	26	10	76	4		
9,60	M12	1,75	27	12	86	4		
Steel							•	•
Stainless steel							•	•
Cast iron							•	•
Non ferrous metals							•	•
Heat resistant alloys							•	•
Hardened materials							•	•

→ v_c/f_z Page 68


Thread Milling Cutter with Chamfer Facet

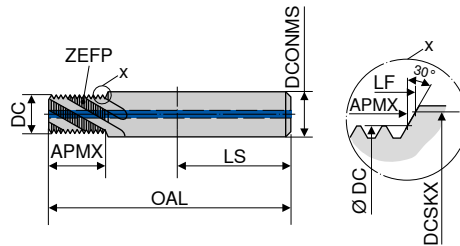

HA
Solid carbide
W1


DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no. 50 811 ...
mm		mm	mm	mm	mm	mm	mm	mm		EUR
4,0	M5	0,80	62	11	36	8	5,3	11,16	3	130,00 050
4,7	M6	1,00	62	13	36	8	6,3	13,93	3	130,00 060
6,5	M8	1,25	74	18	40	10	8,3	18,62	3	154,30 080
8,0	M10	1,50	74	22	40	10			3	154,30 100 ¹⁾
10,0	M12	1,75	90	26	45	14	12,3	26,47	4	238,10 120
12,5	M16	2,00	100	35	48	16			4	282,20 160 ²⁾

- 1) without chamfer
2) chamfer section at the front of the tool



DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no. 50 816 ...
mm		mm	mm	mm	mm	mm	mm	mm		EUR
6,5	M8x1	1,00	74	18	40	10	8,3	18,00	3	154,30 082
8,0	M10x1	1,00	74	22	40	10			3	154,30 102 ¹⁾
8,0	M10x1,25	1,25	74	22	40	10			3	154,30 103 ¹⁾
10,0	M12x1,25	1,25	90	26	45	14	12,3	26,61	4	238,10 123
10,0	M12x1,5	1,50	90	26	45	14	12,3	27,30	4	238,10 124
11,0	M14x1	1,00	100	31	48	16	14,3	32,70	4	282,20 142
11,0	M14x1,5	1,50	100	31	48	16	14,3	32,08	4	282,20 144
12,5	M16x1,5	1,50	100	35	48	16			4	282,20 164 ²⁾

- 1) without chamfer
2) chamfer section at the front of the tool



DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no. 50 818 ...
mm		mm	mm	mm	mm	mm	mm	mm		EUR
7,6	G 1/8-28	0,907	80	20	45	12	10,0	20,97	3	212,80 018
11,0	G 1/4-19	1,337	100	27	48	16	13,5	28,39	4	315,20 014
13,0	G 3/8-19	1,337	100	34	48	16			4	315,20 038 ¹⁾
16,0	G1/2-14	1,814	110	44	50	20			5	445,30 012 ¹⁾



Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•

- 1) chamfer section at the front of the tool

→ v_c/f_z Page 69


i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter with Chamfer Facet

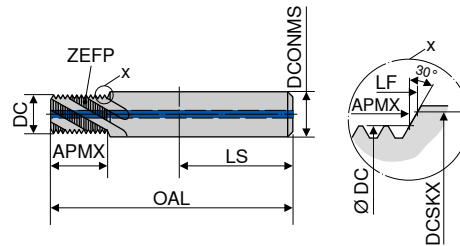


DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no. 50 823 ...
mm		mm	mm	mm	mm	mm	mm	mm		EUR
4,7	UNC 1/4-20	1,270	62	14	36	8	6,65	15,14	3	141,00
6,1	UNC 5/16-18	1,411	74	17	40	10	8,25	18,23	3	172,00
7,6	UNC 3/8-16	1,588	80	21	45	12	9,83	22,05	3	212,80
8,8	UNC 7/16-14	1,814	90	24	45	14	11,43	25,21	3	263,30
10,1	UNC 1/2-13	1,954	90	26	45	14	13,00	27,67	4	263,30
11,4	UNC 9/16-12	2,117	100	31	48	16	14,61	32,15	4	315,20
12,7	UNC 5/8-11	2,309	100	34	48	16			4	315,20
15,2	UNC 3/4-10	2,540	110	42	50	20	19,35	43,74	5	445,30

1) chamfer section at the front of the tool



										W1
DC		TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no. 50 824 ...
mm	Thread	mm	mm	mm	mm	mm	mm	mm		EUR
4,7	UNF 1/4-28	0,907	62	14	36	8	6,65	15,59	3	141,00
6,1	UNF 5/16-24	1,058	74	17	40	10	8,25	18,05	3	172,00
7,6	UNF 3/8-24	1,058	80	21	45	12	9,83	22,30	3	212,80
8,8	UNF 7/16-20	1,270	90	24	45	14	11,43	25,49	3	263,30
10,1	UNF 1/2-20	1,270	90	26	45	14	13,00	28,46	4	263,30
11,4	UNF 9/16-18	1,411	100	31	48	16	14,61	33,03	4	315,20
12,7	UNF 5/8-18	1,411	100	34	48	16			4	315,20
15,2	UNF 3/4-16	1,588	110	42	50	20	19,35	43,69	5	445,30

- 1) chamfer section at the front of the tool



								W1
DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	ZEFP	Article no.
mm		mm	mm	mm	mm	mm	mm	50 819 ...
5,8	NPT 1/16-27	0,941	62	10	36	8	3	EUR 174,10 116 1)
7,6	NPT 1/8-27	0,941	74	10	40	10	3	201,80 018 1)
10,1	NPT 1/4-18	1,411	90	15	45	14	3	302,00 014 1)
16,0	NPT 1/2-14	1.814	110	19	50	20	5	512.50 012 1)

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	



1) without chamfer

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Thread Milling Cutter with Chamfer Facet

- ▲ profile-corrected
- ▲ hard machining to Ø DC = 4 mm possible
- ▲ chamfer section at end of shank

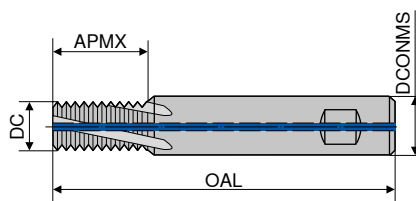

Ti500



HB


Solid carbide
W8Article no.
54 801 ...

EUR

131,30	050	1)
131,30	060	1)
149,90	080	
174,10	100	
261,30	120	
277,80	140	
188,60	160	2)
354,90	180	
277,80	200	2)

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP
mm		mm	mm	mm	mm	
4,00	M5	0,80	11	8	62	3
4,80	M6	1,00	13	8	62	3
6,50	M8	1,25	18	10	74	3
7,95	M10	1,50	22	12	80	3
9,90	M12	1,75	26	14	90	4
11,60	M14	2,00	31	16	100	4
11,95	M16	2,00	35	12	90	4
13,95	M18	2,50	39	20	110	4
15,95	M20	2,50	44	16	100	4

- 1) without through coolant
2) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP
mm		mm	mm	mm	mm	
6,0	M8x1	1,00	18	10	74	3
8,0	M10x1	1,00	22	12	80	3
8,0	M10x1,25	1,25	22	12	80	3
9,9	M12x1	1,00	26	14	90	4
9,9	M12x1,25	1,25	26	14	90	4
9,9	M12x1,5	1,50	26	14	90	4
11,6	M14x1	1,00	31	16	100	4
11,6	M14x1,5	1,50	31	16	100	4
12,0	M16x1,5	1,50	35	12	90	4
14,0	M18x1,5	1,50	39	20	110	4
16,0	M20x1,5	1,50	44	16	100	4


W8

Article no.
54 803 ...

EUR

177,50	080	
209,40	100	
209,40	101	
261,30	120	
261,30	121	
261,30	122	
277,80	140	
277,80	141	
209,40	160	1)
354,90	180	
277,80	200	1)

- 1) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP
mm		mm	mm	mm	mm	
6,00	G 1/16-28	0,907	16	10	74	3
7,95	G 1/8-28	0,907	20	12	80	3
9,90	G 1/4-19	1,337	27	16	100	4
13,95	G 3/8-19	1,337	34	14	90	4
15,95	G 1/2-14	1,814	43	16	100	4
17,95	G 5/8-14	1,814	47	18	110	4

W8

Article no.
54 805 ...

EUR

201,80	116	
215,00	018	
321,90	014	
261,30	038	1)
321,90	012	1)
370,30	058	1)



Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•

- 1) chamfer section at the front of the tool

→ v_c/f_z Page 71

Thread Milling Cutter with Chamfer Facet

- ▲ profile-corrected
- ▲ hard machining to $\varnothing$ DC = 4 mm possible
- ▲ chamfer section at end of shank

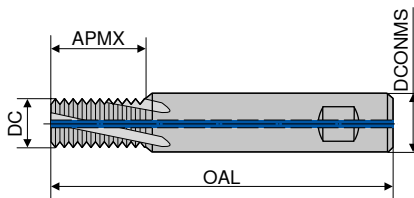

Ti500




HB

Solid carbide
W8Article no.
54 811 ...

EUR


DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm			
4,80	UNC 1/4-20	1,270	14	8	62	3	166,50	014 ¹⁾
5,95	UNC 5/16-18	1,411	18	10	74	3	185,20	516
7,95	UNC 3/8-16	1,588	22	12	80	3	209,40	038
7,95	UNC 7/16-14	1,814	22	14	90	3	240,20	716
9,90	UNC 1/2-13	1,954	27	14	90	4	240,20	012
11,80	UNC 9/16-12	2,117	31	16	100	4	313,00	916
12,70	UNC 5/8-11	2,309	34	14	90	4	245,80	058 ²⁾
15,20	UNC 3/4-10	2,540	38	20	110	5	354,90	034

- 1) without through coolant
- 2) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm			
4,80	UNF 1/4-28	0,907	14	8	62	3	166,50	014 ¹⁾
5,95	UNF 5/16-24	1,058	18	10	74	3	185,20	516
7,60	UNF 3/8-24	1,058	21	12	80	3	209,40	038
7,95	UNF 7/16-20	1,270	22	14	90	3	240,20	716
9,90	UNF 1/2-20	1,270	26	14	90	4	245,80	012
12,00	UNF 9/16-18	1,411	30	16	100	4	313,00	916
13,50	UNF 5/8-18	1,411	33	14	90	4	245,80	058 ²⁾
17,00	UNF 3/4-16	1,588	38	20	110	5	354,90	034

- 1) without through coolant
- 2) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm			
10,1	NPT 1/4-18	1,411	15	14	90	3	229,30	014 ¹⁾
12,8	NPT 3/8-18	1,411	15	16	100	4	234,80	038 ¹⁾
16,0	NPT 1/2-14	1,814	19	20	110	5	362,70	012 ¹⁾
18,5	NPT 3/4-14	1,814	19	20	110	5	362,70	034 ¹⁾

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•



- 1) chamfer section at the front of the tool

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter

▲ available on request: M30, M36, M42, M48, M56, M64

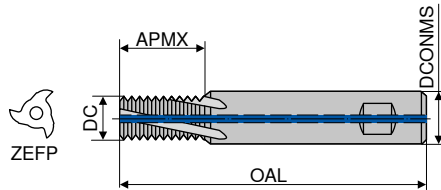

HA

Solid carbide


W1

Article no.
50 825 ...

EUR

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm			
2,40	M3	0,50	6	4	42	3	112,40	030 ¹⁾
3,15	M4	0,70	8	6	55	3	125,70	040
4,00	M5	0,80	10	6	55	3	125,70	050
4,80	M6	1,00	12	6	55	3	125,70	060
6,00	M8	1,25	16	6	63	3	125,70	080
8,00	M10	1,50	20	8	70	3	146,50	100
9,90	M12	1,75	24	10	80	4	176,30	120
11,60	M14	2,00	28	12	90	4	212,80	140
12,00	M16	2,00	32	12	90	4	212,80	160
14,00	M18	2,50	36	14	90	4	277,80	180
14,00	M22	2,50	44	14	95	4	286,50	220
14,00	M20	2,50	40	14	90	4	277,80	200

1) without through coolant



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm			
3,35	M4x0,5	0,50	8	6	55	3	125,70	040
4,20	M5x0,5	0,50	10	6	55	3	125,70	050
5,00	M6x0,75	0,75	12	6	55	3	125,70	061
6,00	M8x0,75	0,75	16	6	63	3	125,70	081
6,00	M8x1	1,00	16	6	63	3	125,70	082
8,00	M10x1	1,00	20	8	70	3	146,50	102
10,00	M12x1	1,00	24	10	80	4	176,30	122
10,00	M12x1,5	1,50	24	10	80	4	176,30	124
10,00	M14x1,5	1,50	28	10	80	4	176,30	144
12,00	M16x1,5	1,50	32	12	90	4	212,80	164
14,00	M18x1,5	1,50	36	14	90	4	277,80	184
14,00	M20x1,5	1,50	40	14	90	4	277,80	204
14,00	M22x1,5	1,50	44	14	95	4	286,50	224
16,00	M24x1,5	1,50	36	16	90	5	320,70	244



Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter

▲ available on request: M30, M36, M42, M48, M56, M64

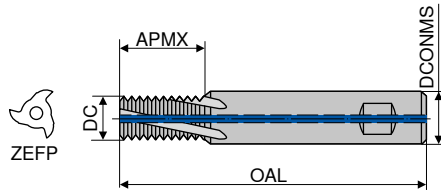

HA
Solid carbide
W1

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	Article no. 50 827 ...	EUR	
8	G 1/8-28	0,907	19,5	8	70	3	154,30	018	
11	G 1/4-19	1,337	26,5	12	90	4	222,60	014	
12	G 3/8-19	1,337	33,0	12	90	4	222,60	038	
14	G 1/2-14	1,814	42,0	14	95	4	289,90	012	
16	G 3/4-14	1,814	34,0	16	90	5	336,10	034	
16	G 1-11	2,309	33,0	16	90	5	336,10	100	
16	G 5/8-14	1,814	34,0	16	90	5	336,10	058	
Steel									
Stainless steel									
Cast iron									
Non ferrous metals									
Heat resistant alloys									
Hardened materials									



→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Thread Milling Cutter

▲ profile corrected

▲ hard machining to Ø DC = 4 mm possible

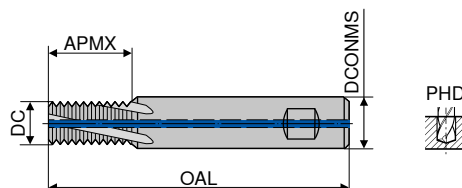

Ti500



HB

Solid carbide

W8

Article no.

54 800 ...


EUR

030	1)
040	2)
050	2)
060	2)
080	
100	
120	
140	
160	
180	
200	

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
2,40	M3	0,50	6,5	4	42	2	2,50
3,15	M4	0,70	9,0	6	55	3	3,30
4,00	M5	0,80	11,0	6	55	3	4,20
4,80	M6	1,00	13,0	6	55	3	5,00
6,00	M8	1,25	18,0	6	60	3	6,75
8,00	M10	1,50	21,0	8	70	3	8,50
9,90	M12	1,75	26,0	10	75	4	10,25
11,60	M14	2,00	30,0	12	85	4	12,00
12,00	M16	2,00	34,0	12	85	4	14,00
14,00	M18	2,50	40,0	14	90	4	15,50
16,00	M20	2,50	42,0	16	90	4	17,50

1) DIN 6535 HA shank / without through coolant

2) without through coolant



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
4,0	M5	0,50	11	6	55	3	4,50
4,8	M6	0,75	13	6	55	3	5,25
6,0	M8	1,00	18	6	60	3	7,00
8,0	M10	1,25	21	8	70	3	8,75
9,9	M12	1,00	26	10	75	4	11,00
9,9	M12	1,25	26	10	75	4	10,75
9,9	M12	1,50	26	10	75	4	10,50
11,6	M14	1,00	30	12	85	4	13,00
11,6	M14	1,50	30	12	85	4	12,50
12,0	M16	1,50	34	12	85	4	14,50
14,0	M18	1,50	40	14	90	4	16,50
16,0	M20	1,50	42	16	90	4	18,50

W8


Article no.

54 802 ...

EUR

050	1)
060	1)
080	
100	
120	
121	
122	
140	
141	
160	
180	
200	

1) DIN 6535 HA shank / without through coolant



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
8,0	G 1/8-28	0,907	21	8	70	3	8,80
9,9	G 1/4-19	1,337	26	10	75	4	11,80
14,0	G 3/8-19	1,337	40	14	90	4	15,25
16,0	G 1/2-14	1,814	42	16	90	4	19,00

W8

Article no.

54 804 ...

EUR



018	
014	
038	
012	

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 71

Thread Milling Cutter

▲ profile corrected

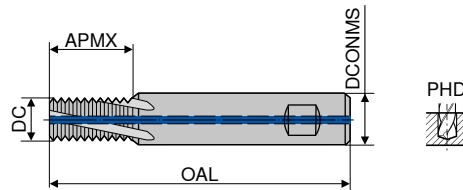

HB

Solid carbide

W8

Article no.

54 806 ...

EUR

136,80 516


136,80 038

169,70 716

169,70 012

195,10 058

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
6,0	BSW 5/16 - 18	1,411	18	6	60	3	6,50
6,0	BSW 3/8 - 16	1,588	18	6	60	3	7,90
8,0	BSW 7/16 - 14	1,814	21	8	70	3	9,25
8,0	BSW 1/2 - 12	2,117	21	8	70	3	10,50
9,9	BSW 5/8 - 11	2,309	26	10	75	4	13,50



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
6,0	BSF 5/16 - 22	1,155	18	6	60	3	6,8
6,0	BSF 3/8 - 20	1,270	18	6	60	3	8,3
8,0	BSF 7/16 - 18	1,411	21	8	70	3	9,7
8,0	BSF 1/2 - 16	1,588	21	8	70	3	11,1
9,9	BSF 5/8 - 14	1,814	26	10	75	4	14,0

W8

Article no.

54 808 ...

EUR


136,80 516

136,80 038

169,70 716

169,70 012

195,10 058



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
4,80	UNC 1/4-20	1,270	13	6	55	3	5,1
6,00	UNC 5/16-18	1,411	18	6	60	3	6,6
7,95	UNC 3/8-16	1,588	21	8	70	3	8,0
7,95	UNC 7/16-14	1,814	21	8	70	3	9,4
9,90	UNC 1/2-13	1,954	26	10	75	4	10,8

W8

Article no.

54 810 ...

EUR

136,80 014 ¹⁾

136,80 516

169,70 038

169,70 716

195,10 012

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

1) DIN 6535 HA shank / without through coolant

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter

▲ profile corrected

SGF




IR/IL



≤ 2xD

60°

UNF

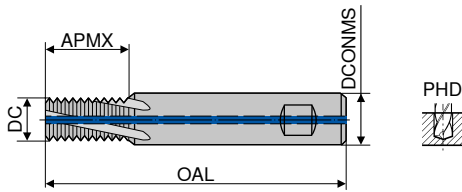

Ti500



HB

Solid carbide
W8

Article no.
54 812 ...

EUR

136,80

136,80

169,70

169,70

195,10

014 1)

516

038

716

012

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD
mm		mm	mm	mm	mm		mm
4,8	UNF 1/4-28	0,907	13	6	55	3	5,5
6,0	UNF 5/16-24	1,058	18	6	60	3	6,9
8,0	UNF 3/8-24	1,058	21	8	70	3	8,5
8,0	UNF 7/16-20	1,270	21	8	70	3	9,9
9,9	UNF 1/2-20	1,270	26	10	75	4	11,5



Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

1) without through coolant

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter

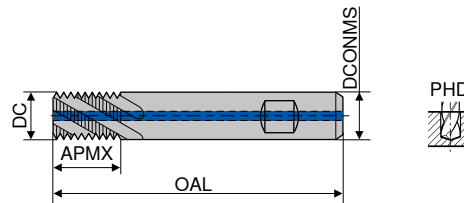

Ti500



HB

Solid carbide
W8Article no.
54 832 ...

EUR

DC	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD		
mm	mm	mm	mm	mm		mm		
8	0,50	12	8	70	3	10	133,30	008
8	0,75	12	8	70	3	11	133,30	080
10	1,00	16	10	75	4	14	138,80	100
10	1,50	16	10	75	4	14	138,80	101
12	1,00	20	12	85	4	16	161,00	120
12	1,50	20	12	85	4	16	161,00	121
12	2,00	20	12	85	4	18	161,00	122
16	1,00	25	16	90	5	22	223,80	160
16	1,50	25	16	90	5	22	223,80	161
16	2,00	25	16	90	5	22	223,80	162
16	3,00	25	16	90	5	24	223,80	164

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Material examples referring to the cutting data tables

	Index	Material	Strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation	Material number	Material designation
P	1.1	General construction steel	< 800 N/mm ²	1.0402	EN3B				
	1.2	Free cutting steel	< 800 N/mm ²	1.0711	EN1A				
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	1.0401	EN32C				
	1.4	Alloyed hardened steel	< 1000 N/mm ²	1.7325	25 CD4				
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	1.5752	EN36	1.0535	EN9		
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	1.6582	EN24				
	1.7	Tempering steel, alloyed	< 800 N/mm ²	1.7225	EN19				
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	1.8515	EN40B				
	1.9	Steel castings	< 850 N/mm ²	0.9650	G-X 260 Cr 27	1.6750	GS-20 NiCrMo 3.7	1.6582	GS-34 CrNiMo 6
	1.10	Nitriding steel	< 1000 N/mm ²	1.8509	EN41B				
	1.11	Nitriding steel	< 1200 N/mm ²	1.1186	EN8	1.1160	EN14A		
	1.12	Roller bearing steel	< 1200 N/mm ²	1.3505	534A99				
	1.13	Spring steel	< 1200 N/mm ²		EN45		EN47		EN43
	1.14	High-speed steel	< 1300 N/mm ²	1.3343	M2	1.3249	M34		
	1.15	Cold working tool steel	< 1300 N/mm ²	1.2379	D2	1.2311	P20		
	1.16	Hot working tool steel	< 1300 N/mm ²	1.2344	H13				
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	1.4581	318				
	2.2	Stainless steel, ferritic	< 750 N/mm ²	1.4000	403				
	2.3	Stainless steel, martensitic	< 900 N/mm ²	1.4057	EN57				
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	1.4028	EN56B				
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	1.4542	17-4PH				
	2.6	Stainless steel, austenitic	< 750 N/mm ²	1.4305	303	1.4401	316	1.4301	304
	2.7	Heat resistant steel	< 1100 N/mm ²	1.4876	Incoloy 800				
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	0.6015	Grade 150	0.6020	Grade 220	0.6025	Grade 260
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	0.6030	Grade 300	0.6035	Grade 350	0.6040	Grade 400
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	0.7040	SG 400-12	0.7043	SG 370-17	0.7050	SG 500-7
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	0.7060	SG 600-3	0.7070	SG 700-2	0.7080	SG 800-2
	3.5	White malleable cast iron	270–450 N/mm ²	0.8035	GTW-35	0.8045	GTW-45		
	3.6	White malleable cast iron	500–650 N/mm ²	0.8055	GTW-55	0.8065	GTW-65		
	3.7	Black malleable cast iron	300–450 N/mm ²	0.8135	GTS-35	0.8145	GTS-45		
	3.8	Black malleable cast iron	500–800 N/mm ²	0.8155	GTS-55	0.8170	GTS-70		
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²	3.0255	1050 A	3.0275	1070 A	3.0285	1080 A (A8)
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²	3.1325	2017 A (AU4G)	3.4335	7005 (AZ5G)	3.4365	7075 (AZ5GU)
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²	3.2315	A-G S1	3.2373	A-S9 G	3.2151	A-S 6 U4
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²	3.2581	A-S12	3.2583	A-S12 U		
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²		A-S18		A-S17 U4		
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²	2.0040	Cu-c1	2.0060	Cu-a1	2.0090	Cu-b1
	4.7	Copper wrought alloys	< 700 N/mm ²	2.1247	Cub2 (Beryllium Copper)	2.0855	CuN2S (Nickel Copper)	2.1310	CU-Fe2P
	4.8	Special copper alloys	< 200 HB	2.0916	Cu-A5	2.1525	Cu-S3 M		Ampco 8 (Cu-A6Fe2)
	4.9	Special copper alloys	< 300 HB	2.0978	Cu-A11 Fe5 Ni5		Ampco 18 (Cu- A10 Fe3)		
	4.10	Special copper alloys	> 300 HB	2.1247	Cu Be2		Ampco M4		
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²	2.0331	Cu Zn36 Pb1,5	2.0380	Cu Zn39 Pb2 (Ms 56)	2.0410	Cu Zn44 Pb2
	4.12	Long-chipping brass	< 600 N/mm ²	2.0335	Cu Zn 36 (Ms63)	2.1293	Cu Cr1 Zr		
	4.13	Thermoplastics		PE	PVC	PS	Polystyrene		Plexiglas
	4.14	Duroplastics		PF	Bakelite		Pertinax		
	4.15	Fibre-reinforced plastics			Carbon Fibre		Fibreglass		Aramid Fibre (Kevlar)
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²	3.5812	Mg A7 Z1	3.5662	Mg A9	3.5105	Mg Tr3 Z2 Zn 1
	4.17	Graphite			R8500X		R8650		Technograph 15
	4.18	Tungsten and tungsten alloys			W-Ni Fe (Densimet)		W- Ni Cu (Inermet)		Denal
	4.19	Molybdenum and molybdenum alloys			TZM		MHQ		Mo W
S	5.1	Pure nickel		2.4066	Ni99 (Nickel 200)	2.4068	Lc Ni99 (Nickel 201)		
	5.2	Nickel alloys		1.3912	Fe-Ni36 (Invar)	1.3917	Fe- Ni42 (N42)	1.3922	Fe-Ni48 (N48)
	5.3	Nickel alloys	< 850 N/mm ²	2.4375	Ni Cu30 Al (Monel K500)	2.4360	Ni Cu30Fe (Monel 400)	2.4668	
	5.4	Nickel molybdenum alloys		2.4600	Ni Mo30Cr2 (Hastelloy B4)	2.4617	Ni Mo28 (Hastelloy B2)	2.4819	Ni Mo16Cr16 Hastell. C276
	5.5	Nickel-chromium alloys	< 1300 N/mm ²	2.4951	Ni Cr20TiAl (Nimonic 80A)	2.4858	Ni Cr21Mo (Inconel 825)	2.4856	Ni Cr22Mo9Nb Inconel 625
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²	2.4964	Co Cr20 W15 Ni10		Co Cr20 Ni16 Mo7		Co Cr28 Mo 6
	5.7	Heat resistant alloys	< 1300 N/mm ²	1.4718	Z45 C S 9-3	1.4747	Z80 CSN 20-02	1.4845	Z12 CN 25-20
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²	2.4851	Ni Cr23Fe (Inconel 601)	2.4668	Ni Cr19NbMo (Inconel 718)	2.4602	Ni Cr21Mo14 Hastelloy C22
	5.9	Pure titanium	< 900 N/mm ²	3.7025	T35 (Titanium Grade 1)	3.7034	T40 (Titanium Grade 2)	3.7064	T60 (Titanium Grade 4)
	5.10	Titanium alloys	< 700 N/mm ²		T-A6-Nb7 (367)		T-A5-Sn2-Mo4-Cr4 (Ti17)		T-A3-V2,5 (Gr18)
	5.11	Titanium alloys	< 1200 N/mm ²	3.7165	T-A6-V4 (Ta6V)		T-A4-3V-Mo2-Fe2 (SP700)		T-A5-Sn1-Zr1-V1-Mo (Gr32)
H	6.1		< 45 HRC						
	6.2		46–55 HRC						
	6.3	Tempered steel	56–60 HRC						
	6.4		61–65 HRC						
	6.5		65–70 HRC						

7

Cutting data approximate values

Index	UNI VHM OSM 2xD			UNI VHM OSM 3xD			H VHM 2xD				HR VHM		
	50 815 ...			50 821 ...			50 840 ...				50 846 ..., 50 847 ...		
	v_c m/min	ϕ 6-10 f_z	ϕ 12-20 f_z	v_c m/min	ϕ 6-10 f_z	ϕ 12-20 f_z	v_c m/min	ϕ 3-5 f_z	ϕ 6-10 f_z	ϕ 12-16 f_z	v_c m/min	< 10 f_z	> 10 f_z
1.1	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.2	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.3	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.4	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.5	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.6	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.7	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.8	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.9	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.10	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.11	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.12	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.13	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.14	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.15	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.16	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
2.1	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.2	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.3	100-200	0,02-0,03	0,04-0,05								60-120	0,015-0,03	0,03-0,06
2.4	100-200	0,02-0,03	0,04-0,05								60-120	0,015-0,03	0,03-0,06
2.5	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.6	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.7	100-200	0,02-0,03	0,04-0,05								60-120	0,015-0,03	0,03-0,06
3.1	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.2	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.3	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.4	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.5	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
3.6	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
3.7	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
3.8	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
4.1													
4.2													
4.3													
4.4													
4.5	220-250	0,05-0,07	0,06-0,08	180-200	0,05-0,07	0,06-0,08							
4.6													
4.7													
4.8													
4.9											60-80	0,02-0,04	0,03-0,05
4.10											60-80	0,02-0,04	0,03-0,05
4.11	250-300	0,05-0,07	0,06-0,08	200-240	0,05-0,07	0,06-0,08							
4.12													
4.13													
4.14													
4.15	250-300	0,05-0,07	0,06-0,08	180-200	0,05-0,07	0,06-0,08					400-500	0,05-0,08	0,07-0,10
4.16	250-300	0,05-0,07	0,06-0,08	180-200	0,05-0,07	0,06-0,08							
4.17													
4.18	50-80	0,015-0,025	0,020-0,035								40-60	0,015-0,025	0,020-0,035
4.19	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
5.1	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
5.2											60-80	0,02-0,03	0,03-0,04
5.3											60-80	0,02-0,03	0,03-0,04
5.4							40-80	0,005-0,015	0,015-0,03	0,02-0,05	30-60	0,01-0,02	0,02-0,03
5.5							40-80	0,005-0,015	0,015-0,03	0,02-0,05	30-60	0,01-0,02	0,02-0,03
5.6							60-100	0,005-0,015	0,02-0,04	0,03-0,06	30-60	0,01-0,02	0,02-0,03
5.7	70-100	0,02-0,03	0,04-0,05				80-120	0,005-0,015	0,02-0,04	0,03-0,06	40-60	0,01-0,02	0,02-0,03
5.8							40-80	0,005-0,015	0,015-0,03	0,02-0,05	30-60	0,01-0,02	0,02-0,03
5.9											60-80	0,02-0,03	0,03-0,04
5.10											60-80	0,02-0,03	0,03-0,04
5.11							40-80	0,005-0,015	0,015-0,03	0,02-0,05	60-80	0,02-0,03	0,03-0,04
6.1	80-120	0,02-0,04	0,04-0,06				80-120	0,005-0,015	0,03-0,06	0,03-0,06	60-100	0,02-0,04	0,03-0,06
6.2	80-120	0,02-0,04	0,04-0,06				60-100	0,005-0,015	0,02-0,04	0,02-0,04	60-100	0,02-0,04	0,03-0,06
6.3	50-80	0,015-0,025	0,020-0,035				30-60	0,005-0,01	0,01-0,03	0,01-0,03	40-60	0,015-0,025	0,020-0,035
6.4	50-80	0,015-0,025	0,020-0,035				30-60	0,005-0,01	0,005-0,015	0,005-0,02	40-60	0,015-0,025	0,020-0,035
6.5													

Cutting data approximate values

Index	SFSE VHM TiAlN			SGF VHM TiAlN			MWN uncoated		MWN TiAlN		EAW / EWM		
	50 811 ..., 50 816 ..., 50 818 ..., 50 819 ..., 50 823 ..., 50 824 ...			50 825 ..., 50 826 ..., 50 827 ...			50 890 ..., 50 891 ..., 50 892 ..., 50 895 ..., 50 896 ..., 50 897 ...		50 890 ..., 50 891 ..., 50 895 ...		50 860 ..., 50 861 ..., 50 867 ..., 50 868 ..., 50 870 ..., 50 871 ...		
	v_c m/min	ϕ 6-10 f_z	ϕ 12-20 f_z	v_c m/min	ϕ 6-10 f_z	ϕ 12-20 f_z	v_c m/min	f_z	v_c m/min	f_z	v_c m/min	EAW f_z	EWM f_z
1.1	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.2	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.3	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.4	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.5	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.6	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.7	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.8	40-80	0,01-0,03	0,03-0,05										
1.9	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.10	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.11	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.12	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.13	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.14	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.15	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.16	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
2.1	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.2	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.3	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.4	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.5	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.6	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.7	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
3.1	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.2	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.3	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.4	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.5	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
3.6	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
3.7	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
3.8	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
4.1	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,10-0,20	200-250	0,10-0,20	400-500	0,08-0,15	0,08-0,15
4.2	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,10-0,20	200-250	0,10-0,20	400-500	0,08-0,15	0,08-0,15
4.3	225-275	0,05-0,07	0,06-0,08	225-275	0,05-0,07	0,06-0,08	100-200	0,10-0,20	200-250	0,10-0,20	400-500	0,08-0,15	0,08-0,15
4.4	200-225	0,04-0,06	0,05-0,07	200-225	0,04-0,06	0,05-0,07	100-200	0,10-0,20	200-250	0,10-0,20	300-400	0,06-0,10	0,06-0,10
4.5	180-200	0,03-0,05	0,04-0,06	180-200	0,03-0,05	0,04-0,06			150-200	0,08-0,10	300-400	0,06-0,10	0,06-0,10
4.6	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,12-0,15	200-250	0,12-0,15	400-500	0,08-0,15	0,08-0,15
4.7	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,12-0,15	200-250	0,12-0,15	400-500	0,08-0,15	0,08-0,15
4.8	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10			200-250	0,03-0,06	400-500	0,08-0,15	0,08-0,15
4.9	60-80	0,02-0,03	0,03-0,04	50-70	0,02-0,03	0,03-0,04			40-80	0,12-0,15	150-200	0,08-0,12	0,08-0,12
4.10	60-80	0,02-0,03	0,03-0,04	50-70	0,02-0,03	0,03-0,04			40-80	0,12-0,15	150-200	0,08-0,12	0,08-0,12
4.11	200-225	0,04-0,06	0,05-0,07	200-225	0,04-0,06	0,05-0,07	70-120	0,04-0,08	100-150	0,04-0,08	400-500	0,08-0,15	0,08-0,15
4.12	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	90-180	0,08-0,10	150-200	0,08-0,10	400-500	0,08-0,15	0,08-0,15
4.13	350-450	0,10-0,13	0,12-0,15	350-450	0,10-0,13	0,12-0,15	180-250	0,15-0,20	250-300	0,15-0,20	600-800	0,15-0,25	0,15-0,25
4.14	300-400	0,10-0,13	0,12-0,15	300-400	0,10-0,13	0,12-0,15	100-200	0,12-0,15	200-250	0,12-0,15	600-800	0,15-0,25	0,15-0,25
4.15	180-200	0,04-0,06	0,05-0,07	180-200	0,04-0,06	0,05-0,07			100-150	0,04-0,08	150-200	0,08-0,12	0,08-0,12
4.16	200-225	0,04-0,06	0,05-0,07	200-225	0,04-0,06	0,05-0,07			100-130	0,04-0,08	400-500	0,08-0,15	0,08-0,15
4.17	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14							
4.18													
4.19	40-80	0,01-0,03	0,03-0,05								150-250	0,08-0,12	0,08-0,12
5.1	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10					250-500	0,10-0,20	0,10-0,20
5.2	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.3	50-80	0,02-0,04	0,03-0,05								50-100	0,02-0,08	0,02-0,08
5.4													
5.5													
5.6													
5.7													
5.8													
5.9	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.10	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.11	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
6.1													
6.2													
6.3													
6.4													
6.5													

Cutting data approximate values

Index	SGF VHM Ti500			GZG / GZD				Polygon		System 300		
	54 832 ...			50 863 ..., 50 864 ..., 50 887 ..., 50 885 ..., 50 888 ..., 50 889 ..., 50 894 ...				50 872 ..., 50 874 ..., 50 875 ..., 50 876 ..., 50 879 ..., 50 880 ..., 50 881 ..., 50 882 ..., 50 883 ..., 50 884 ..., 50 886 ...		50 851 ..., 50 852 ..., 50 853 ..., 50 855 ..., 50 857 ..., 50 858 ..., 50 859 ...		
	Ti500	size		uncoated	Ti500	size		Ti500		uncoated	Ti500	
	V _c m/min	8 mm f _z	10–16 mm f _z	V _c m/min	V _c m/min	12–17 mm f _z	20–26 mm f _z	V _c m/min	f _z	V _c m/min	V _c m/min	f _z
1.1	80–250	0,04–0,07	0,05–0,15		180–260	0,1–0,3	0,05–0,3	150–200	0,05–0,25		120–180	0,05–0,12
1.2	80–250	0,04–0,07	0,05–0,15		180–260	0,1–0,3	0,05–0,3	150–200	0,05–0,25		120–180	0,05–0,12
1.3	80–250	0,04–0,07	0,05–0,15		180–260	0,1–0,3	0,05–0,3	100–150	0,05–0,25		120–180	0,05–0,12
1.4	60–120	0,04–0,07	0,05–0,10		180–220	0,1–0,3	0,05–0,3	100–150	0,05–0,25		100–120	0,05–0,12
1.5	60–100	0,04–0,07	0,05–0,10		180–260	0,1–0,3	0,05–0,3	150–200	0,05–0,25		120–180	0,05–0,12
1.6	60–120	0,04–0,07	0,05–0,10		180–220	0,1–0,3	0,05–0,3	100–150	0,05–0,25		100–120	0,05–0,12
1.7	80–200	0,04–0,07	0,05–0,10		180–260	0,1–0,3	0,05–0,3	100	0,05–0,25		120–180	0,05–0,12
1.8	40–100	0,03–0,05	0,04–0,06		100–150	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
1.9	60–100	0,04–0,07	0,05–0,10		180–260	0,1–0,3	0,05–0,3	100	0,05–0,25		100–120	0,05–0,12
1.10	60–120	0,04–0,07	0,05–0,10		100–150	0,1–0,2	0,05–0,2	120	0,05–0,25		100–120	0,05–0,12
1.11	40–100	0,03–0,05	0,04–0,06		100–150	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
1.12	40–100	0,03–0,05	0,04–0,06		100–150	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
1.13	40–100	0,03–0,05	0,04–0,06		100–150	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
1.14	40–100	0,03–0,05	0,04–0,06		100–120	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
1.15	40–100	0,03–0,05	0,04–0,06		100–150	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
1.16	40–100	0,03–0,05	0,04–0,06		100–150	0,1–0,2	0,05–0,2	100	0,05–0,25		80–100	0,05–0,12
2.1	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3				120–150	0,05–0,12
2.2	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3				120–150	0,05–0,12
2.3	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3	120	0,05–0,25		100–120	0,05–0,12
2.4	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3	120	0,05–0,25		100–120	0,05–0,12
2.5	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3	120	0,05–0,25		120–180	0,05–0,12
2.6	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3	180	0,05–0,25		120–180	0,05–0,12
2.7	50–150	0,04–0,07	0,05–0,12		130–180	0,1–0,3	0,05–0,3				80–100	0,05–0,12
3.1	80–200	0,04–0,07	0,05–0,15	100–150	130–200	0,1–0,3	0,05–0,3	180	0,05–0,25	80–120	120–180	0,05–0,12
3.2	80–200	0,04–0,07	0,05–0,15	80–120	130–200	0,1–0,3	0,05–0,3	120	0,05–0,25	80–120	120–180	0,05–0,12
3.3	80–200	0,04–0,07	0,05–0,15		130–200	0,1–0,3	0,05–0,3	180	0,05–0,25	80–120	120–180	0,05–0,12
3.4	80–200	0,04–0,07	0,05–0,15		130–200	0,1–0,3	0,05–0,3	180	0,05–0,25	80–120	120–180	0,05–0,12
3.5	80–160	0,04–0,07	0,05–0,15		130–200	0,1–0,3	0,05–0,3	180	0,05–0,25	80–120	120–180	0,05–0,12
3.6	80–160	0,04–0,07	0,05–0,15		130–200	0,1–0,3	0,05–0,3	120	0,05–0,25	80–120	120–180	0,05–0,12
3.7	80–160	0,04–0,07	0,05–0,15		130–200	0,1–0,3	0,05–0,3	180	0,05–0,25	80–120	120–180	0,05–0,12
3.8	80–160	0,04–0,07	0,05–0,15		130–200	0,1–0,3	0,05–0,3	120	0,05–0,25	80–120	120–180	0,05–0,12
4.1	250–500	0,05–0,08	0,07–0,2	300–400	400–600	0,1–0,3	0,05–0,3	400	0,15–0,4	400–500		0,05–0,25
4.2	250–500	0,05–0,08	0,07–0,2	300–400	400–600	0,1–0,3	0,05–0,3	400	0,15–0,4	300–400		0,05–0,25
4.3	250–500	0,05–0,08	0,07–0,2					300	0,15–0,4			
4.4	250–500	0,05–0,08	0,07–0,2					250	0,15–0,4			
4.5	180–250	0,05–0,07	0,06–0,12									
4.6	250–300	0,05–0,07	0,06–0,08					500	0,15–0,4		300–500	0,05–0,25
4.7												
4.8								120	0,05–0,15			
4.9												
4.10												
4.11	250–300	0,05–0,07	0,06–0,08					400	0,15–0,4		200–300	0,05–0,25
4.12								400	0,15–0,4			
4.13	350–450	0,08–0,1						500	0,15–0,4		300–500	0,05–0,25
4.14	80–400	0,05–0,1	0,08–0,25					500	0,15–0,4		300–500	0,05–0,25
4.15	180–200	0,02–0,04	0,03–0,04									
4.16												
4.17								500	0,15–0,4		300–500	0,05–0,25
4.18												
4.19												
5.1												
5.2								120	0,05–0,25		80–120	0,05–0,12
5.3								120	0,05–0,25		80–120	0,05–0,12
5.4												
5.5												
5.6												
5.7												
5.8												
5.9												
5.10								80	0,01–0,08		70–100	0,01–0,05
5.11	40–60	0,03–0,05	0,04–0,1					60	0,01–0,08		60–90	0,01–0,05
6.1	40–60	0,03–0,05	0,04–0,1								80–100	0,03–0,1
6.2	40–60	0,03–0,05	0,04–0,1					100	0,05–0,15		80	0,03–0,1
6.3								100	0,05–0,10			
6.4												
6.5												

Cutting data approximate values


SFSE / SGF VHM Ti500					MiniMill			MicroMill	
54 800 ..., 54 801 ..., 54 802 ..., 54 803 ..., 54 804 ..., 54 805 ..., 54 806 ..., 54 808 ..., 54 809 ..., 54 810 ..., 54 811 ..., 54 812 ..., 54 813 ...					53 006 ..., 53 007 ..., 53 008 ..., 53 009 ..., 53 010 ..., 53 011 ..., 53 012 ..., 53 013 ..., 53 015 ...			53 050 ..., 53 051 ..., 53 052 ..., 53 053 ...	
Index	V _c m/min	Ø 2,4 + 3,15 f _z	Ø 4 f _z	Ø 4,8-16 f _z	V _c m/min	f _z (drilling)	f _z (threading)	V _c m/min	f _z (drilling)
1.1	80-250	0,03-0,04	0,03-0,06	0,05-0,15	80-200	0,03-0,10	0,10-0,25	60-200	0,02-0,05
1.2	80-250	0,03-0,04	0,03-0,06	0,05-0,15	80-200	0,03-0,10	0,10-0,25	60-200	0,02-0,05
1.3	80-250	0,03-0,04	0,03-0,06	0,05-0,15	80-200	0,03-0,10	0,10-0,25	60-200	0,02-0,05
1.4	60-120	0,01-0,02	0,01-0,03	0,05-0,10	60-180	0,03-0,08	0,10-0,15	60-160	0,01-0,04
1.5	60-120	0,01-0,02	0,01-0,03	0,05-0,10	60-180	0,03-0,08	0,10-0,15	60-160	0,02-0,05
1.6	60-120	0,01-0,02	0,01-0,03	0,05-0,10	60-180	0,03-0,08	0,10-0,15	60-160	0,01-0,04
1.7	80-200	0,03-0,04	0,03-0,06	0,05-0,10	60-160	0,03-0,10	0,10-0,20	50-140	0,02-0,05
1.8	40-100	0,01-0,02	0,03-0,05	0,04-0,06	60-160	0,02-0,07	0,10-0,20	50-140	0,007-0,03
1.9	60-120	0,01-0,02	0,04-0,07	0,05-0,10	60-160	0,03-0,10	0,10-0,20	50-140	0,02-0,05
1.10	60-120	0,01-0,02	0,04-0,07	0,05-0,10	60-160	0,03-0,10	0,10-0,20	50-140	0,01-0,04
1.11	40-100	0,01-0,02	0,03-0,05	0,04-0,06	60-160	0,02-0,08	0,10-0,20	50-140	0,007-0,03
1.12	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.13	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.14	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.15	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.16	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
2.1	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,03-0,08	0,10-0,25	60-120	0,01-0,04
2.2	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,03-0,10	0,10-0,25	60-120	0,02-0,05
2.3	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.4	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.5	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.6	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.7	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
3.1	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.2	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.3	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.4	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.5	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.6	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.7	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.8	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
4.1	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.2	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.3	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.4	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.5	180-250	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.6	250-300	0,05-0,07	0,05-0,07	0,06-0,08	200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.7					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.8					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.9					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.10					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.11	250-300	0,05-0,07	0,05-0,07	0,06-0,08	150-180	0,04-0,15	0,05-0,2	120-180	0,02-0,07
4.12					150-180	0,04-0,15	0,05-0,2	120-180	0,02-0,07
4.13	350-450	0,08-0,1	0,08-0,1	0,1-0,12	20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,1
4.14	300-400	0,08-0,1	0,08-0,1	0,1-0,12	20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,1
4.15	180-200	0,02-0,04	0,02-0,04	0,03-0,04	20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,07
4.16					20-100	0,02-0,10	0,05-0,2	10-50	0,02-0,05
4.17					20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,07
4.18					20-100	0,02-0,10	0,05-0,2	10-50	0,02-0,05
4.19					20-100	0,02-0,10	0,05-0,2	10-50	0,02-0,05
5.1					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.2					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.3	60-80	0,02-0,04	0,02-0,04	0,03-0,04	10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.4					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.5					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.6					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.7					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.8					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.9					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.10					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.11	50-80	0,01-0,03	0,01-0,03	0,01-0,03	10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
6.1	40-60		0,03-0,05	0,03-0,05	10-60	0,002-0,05		10-40	0,007-0,02
6.2	40-50		0,03-0,05	0,03-0,05	10-60	0,002-0,05		10-40	0,007-0,02
6.3	30-40		0,02-0,04	0,02-0,04	10-60	0,002-0,05		10-40	0,007-0,02
6.4								10-40	0,007-0,02
6.5									

Milling Procedures


Climb milling

Characteristics:

- ① Tool rotation direction „right“
- ② Toolpath counter clockwise
- ③ Feed direction „outwards“

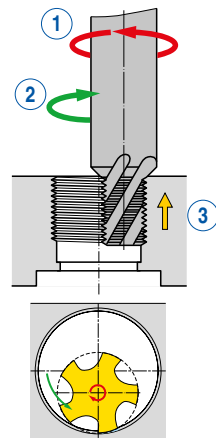


Right hand thread

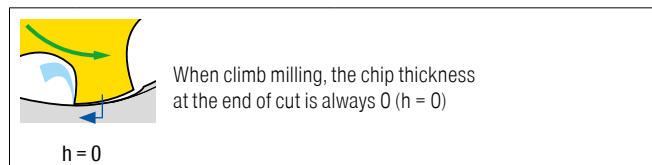


Conventional milling

Characteristics:


- ① Tool rotation direction „right“
- ② Toolpath clockwise
- ③ Feed direction „inwards“

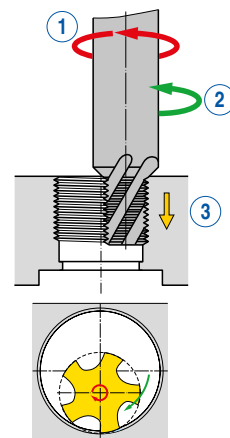

Right hand thread

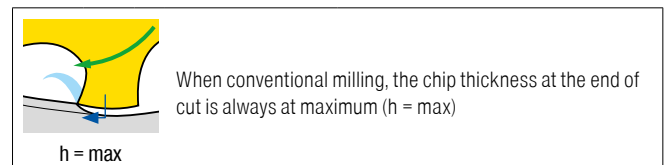


Feed rate calculation

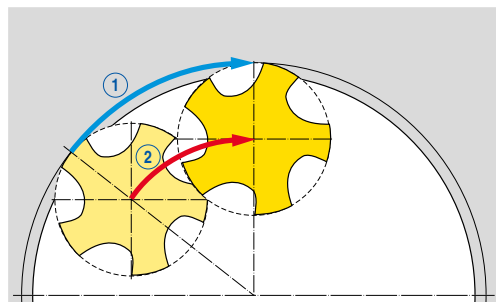


- ① Peripheral feedrate v_f
- ② Centerline feedrate v_{fm}

Peripheral feedrate v_f

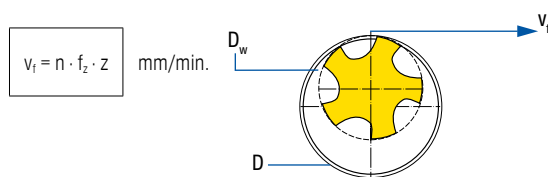

D_w = Effective diameter in mm
 n = RPM in min^{-1}
 f_z = Feed per tooth in mm

Centerline feedrate v_{fm}

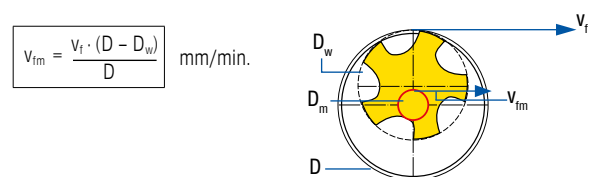

z = Number of cutting edges (radial)
 D = Nominal thread diameter = external profile diameter in mm
 D_m = Centre path diameter ($D - D_w$) in mm

Tips for the User

i With thread milling there are two different programme possibilities with the feed motion of the tool.

On the one hand the machine controls the feed at the diameter of the tool, on the other hand the feed control is the tool center line. In order to ascertain which method the machine control uses, the following method should be employed:

- ▲ enter the thread milling routine into the control
- ▲ enter a safety margin into the program, so that the tool runs in air
- ▲ run the program through and check the operating time
- ▲ compare the actual time with the calculated theoretical time

If the time is longer than the calculated time the feed is controlling the tool center line.

If the time is shorter than the calculated time the feed is controlling the diameter of the tool.

Numeric calculation of cutting data for thread milling

$$n = \frac{v_c \cdot 1000}{d \cdot \pi}$$

$$v_c = \frac{d \cdot \pi \cdot n}{1000}$$

$$v_f = f_z \cdot Z \cdot n$$

$$n = \frac{v_f}{f_z \cdot Z}$$

$$f_z = \frac{v_f}{Z \cdot n}$$

Milling – external contour

$$v_{fm} = \frac{v_f \cdot (D + d)}{D}$$

$$v_f = \frac{D \cdot v_{fm}}{(D + d)}$$

Milling – internal contour

$$v_{fm} = \frac{v_f \cdot (D - d)}{D}$$

$$v_f = \frac{D \cdot v_{fm}}{(D - d)}$$

Helical plunging

$$U_{arc} = 0,25 \cdot v_{fm}$$

n	=	rpm	rev./min.
v_c	=	cutting speed	m/min
d	=	tool diameter	mm
D	=	nominal thread-Ø	mm
v_f	=	feed rate at the diameter	mm/min.

Ramping in the arc

$$U_{arc} = v_{fm}$$

v_{fm}	=	feed rate at the centre	mm/min.
U_{arc}	=	programmed ramping feed rate	mm/min.
f_z	=	feed per tooth	mm
Z	=	number of cutting edges of the cutter	piece

7

Correction values for the internal thread milling

The cutting edge diameter of the thread milling cutter which is entered into the machine control, can be calculated as follows:

half the cutter Ø – 0,05 x pitch p

Example: M30x3
Cutter-Ø: 20 mm

$$\frac{\emptyset 20}{2} - (0,05 \cdot 3) = \underline{9,85 \text{ mm}}$$

9,85 mm is the cutting radius to be entered into the machine control

Thread types

M	Metric ISO standard thread	BSF	Whitworth fine thread
MF	Metric ISO fine thread	BSW	Whitworth thread
G	Whitworth thread	Pg	Steel conduit thread
UNF	Unified fine thread	UN	Unified thread
NPT	American taper pipe thread	Tr	Trapezoidal thread

Tool types

EAW	Thread milling cutter with solid carbide inserts and weldon flat	MWN	Thread milling cutter with carbide inserts and Weldon flat
EWM	Thread milling cutter with solid carbide inserts and SK adaptor	Polygon	Circular milling cutter with polygon insert seat
GZD	Thread milling cutter with carbide inserts and Weldon flat	SGF	Thread milling cutter
GZG	Thread milling cutter with carbide inserts and Weldon flat	Micro Mill	Solid Carbide Circular End Milling Cutter
HR	Single point thread milling cutter	System 300	Circular milling cutter with solid carbide insert
SFSE	Thread milling cutter with chamfer facet	UNI	Thread milling cutter for universal application
Mini Mill	Circular milling cutter with solid carbide insert		

Coatings

TiN	▲ TiN coating ▲ maximum application temperature: 450 °C	CWX500	▲ carbide, TiAlN-coated ▲ ISO K30 ▲ the universal carbide grade for almost all materials
TiAlN	▲ TiAlN multilayer coating ▲ maximum application temperature: 900 °C	OSM	▲ hard material layer and anti-friction layer ▲ for use in high-strength steels
Ti500	▲ TiAlN-coating ▲ maximum application temperature: 500 °C	TiCN	▲ TiCN multilayer coating ▲ maximum application temperature: 450 °C