New products for machining technicians

NEW MonsterMill – TCR

TCR

→ Page 23–27

High-performance milling cutter for machining titanium and heat-resistant materials

---

NEW MonsterMill – HCR

HCR

→ Page 28–33

The specialist for hardened steels

NEW CircularLine – CCR-Ti

CCR Ti

→ Page 46

Trochoidal milling cutter for titanium and heat-resistant materials

---

NEW CircularLine – CCR-H

CCR H

→ Page 47

Trochoidal milling cutter for hardened steels

NEW MultiChange – Torus cutter

AL

→ Page 119

High-volume milling cutter for aluminium machining

NEW MultiChange – Shoulder mill

PCR UNI | PCR ALU

→ Page 120

PCR plunge milling cutter – now also with MultiChange interface

---

NEW Circular saw blades



→ Page 228–230

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 EcoCut

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters 14

15 Milling tools with indexable inserts

Tool Clamping

16 Adapters

17 Accessories

18 Material examples and article no. index

Table of contents

Symbol explanation 2
Toolfinder 3–5
List of contents 6–12
Product programme 13–242
Technical Information
Selection guide for cutters for plastic, fiberglass, carbon fibre 231
Cutting Data 243–355
Approximate feed rates 356
Slot milling via Trochoidoidal procedures 357
General references 358–362
Coatings 363

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Shank

Shank type

Length: extra short / short / medium / long / extra long

Central internal coolant

Lateral internal coolant

Cutting edge preparation

Sharp

Chamfer (CHW = chamfer width in mm)

Radius

Full Radius

Application

High volume machining

High-feed milling

Hard materials

Machining example

The red arrows describe the possible feed directions

Number of teeth

Cutting geometry
λ_s = Helix Angle
γ_s = Rake Angle

Trochoidal milling

● = **Main Application**
○ = Extended application

Toolfinder for High Performance Milling Cutters

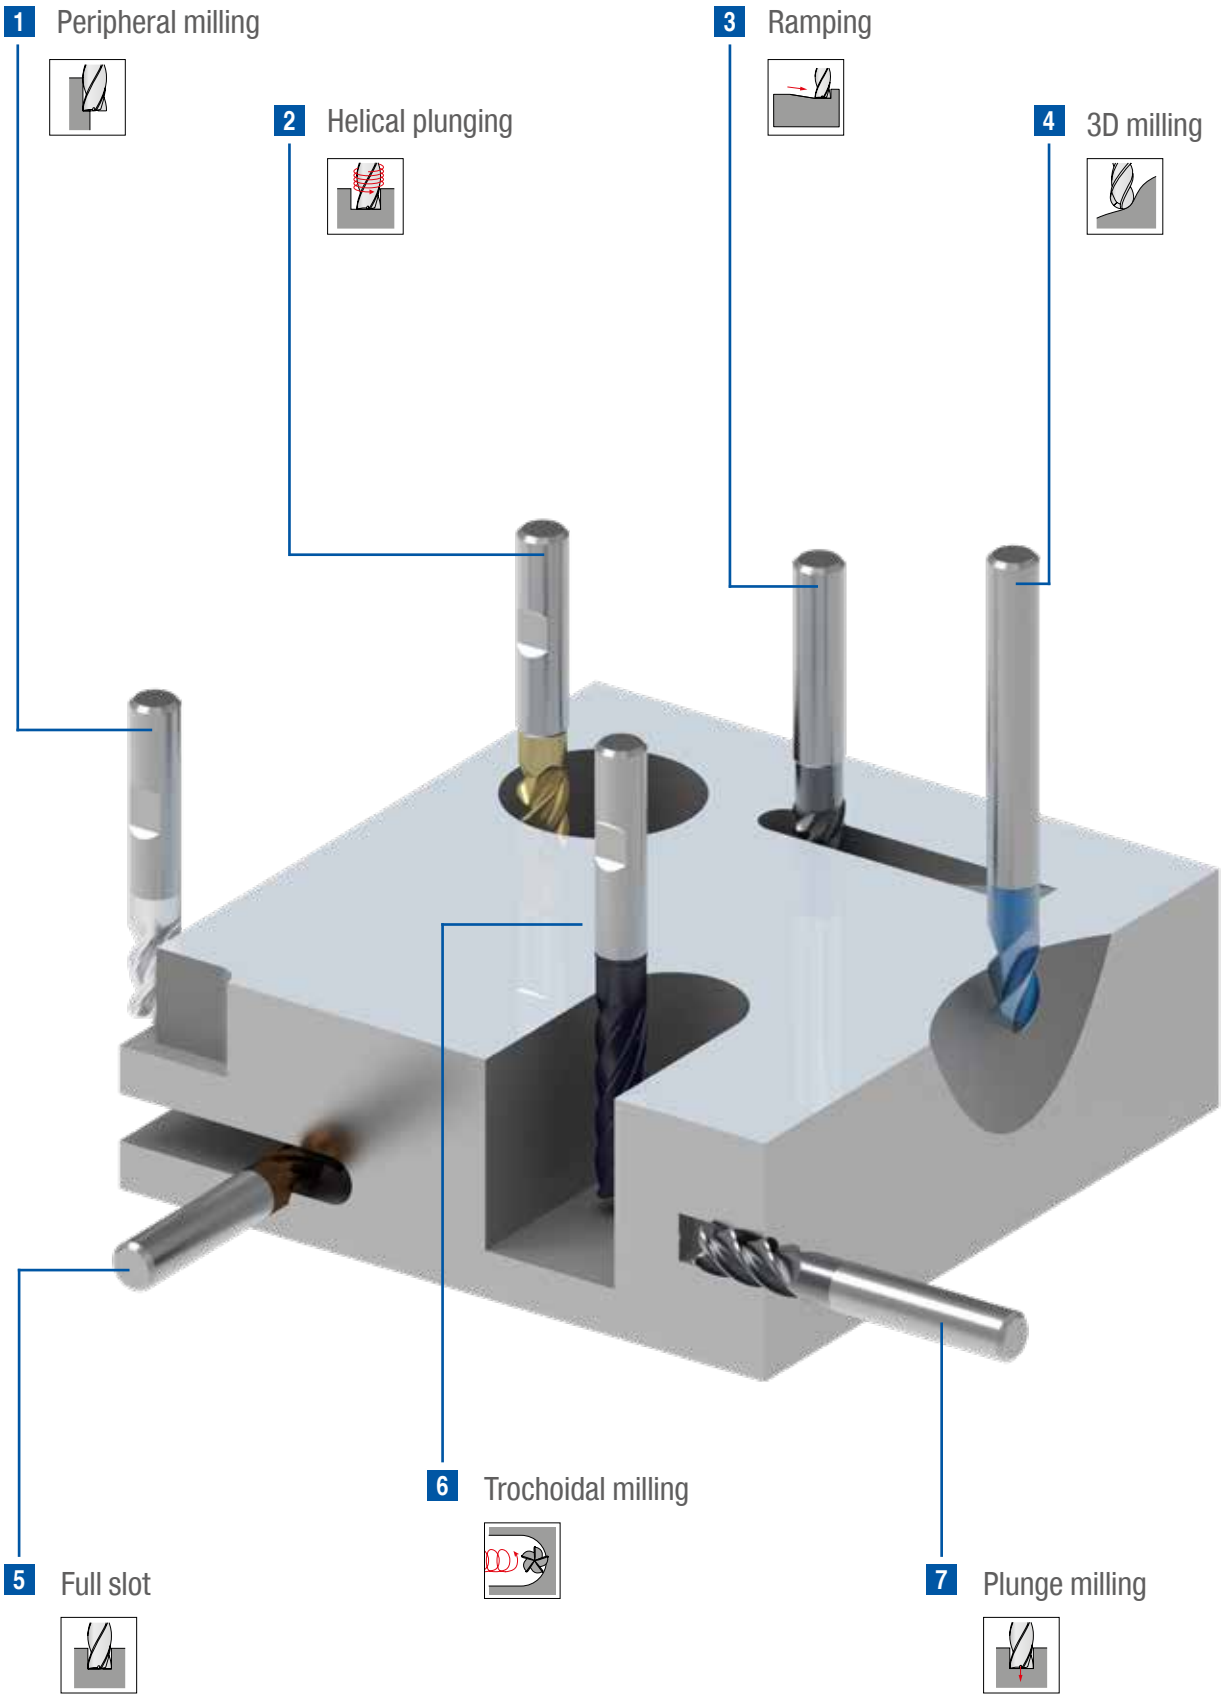

Toolfinder for High Performance Milling Cutters

	1 Peripheral milling	2 Helical plunging	3 Ramping	4 3D milling
Steel	S-Cut MonsterMill – SCR SilverLine	MCR MonsterMill – PCR	MCR MonsterMill – PCR	MonsterMill – SCR SilverLine
Stainless steel	S-Cut MonsterMill – ICR SilverLine	MonsterMill – PCR MonsterMill – ICR	MonsterMill – PCR MonsterMill – ICR	SilverLine
Cast iron	S-Cut MonsterMill – SCR SilverLine	MCR MonsterMill – PCR	MCR MonsterMill – PCR	MonsterMill – SCR SilverLine
Non-ferrous metals	AluLine	MonsterMill – PCR AluLine	MonsterMill – PCR AluLine	AluLine
Heat resistant alloys	MonsterMill – ICR MonsterMill – TCR	MonsterMill – ICR MonsterMill – TCR	MonsterMill – ICR MonsterMill – TCR	MonsterMill – TCR
Hardened steel < 55 HRC	BlueLine	BlueLine	BlueLine	BlueLine
Hardened steel > 55 HRC	MonsterMill – HCR	MonsterMill – HCR	MonsterMill – HCR	MonsterMill – HCR

MonsterMill – SCR
Page 13–20

▲ THE specialist for machining steel

SCR

HA
HB

ZEFP: 3–6
Ø DC mm: 3–20

MonsterMill – ICR
Page 21+22

▲ THE specialist for machining stainless steel

ICR

HB

ZEFP: 3–5
Ø DC mm: 1,5–20

MonsterMill – TCR
Page 23–27

▲ THE specialist for machining titanium

TCR

HB

ZEFP: 2–5
Ø DC mm: 2–20

MonsterMill – HCR
Page 28–33

▲ THE specialist for finish machining up to 70 HRC hardness

HCR

HA

ZEFP: 2–4
Ø DC mm: 0,2–12

MonsterMill – PCR
Page 34–36

▲ THE specialist for ramping and helical milling
▲ Available versions: PCR-UNI, PCR-ALU

PCR

HB

ZEFP: 4
Ø DC mm: 5–20

MonsterMill – MCR
Page 37

▲ THE specialist for rough machining

MCR

HB

ZEFP: 3–4
Ø DC mm: 1–20

	5 Full slot	6 Trochoidal milling	7 Plunge milling
	S-Cut MonsterMill – SCR SilverLine	CircularLine	MonsterMill – PCR
	S-Cut MonsterMill – ICR SilverLine	CircularLine	
	S-Cut MonsterMill – SCR SilverLine	CircularLine	MonsterMill – PCR
	AluLine	CircularLine	MonsterMill – PCR
	MonsterMill – ICR MonsterMill – TCR	CircularLine	
	BlueLine	CircularLine	
		CircularLine	

CircularLine
Page 38–47

- THE specialist for trochoidal milling
- Available versions: CCR-UNI, CCR-AL, CCR-Ti, CCR-H

CCR

HB

ZEFP	Ø DC mm
4–6	6–20

AluLine
Page 48–69

- THE specialist for machining non-ferrous metals

W

HA
HB

ZEFP	Ø DC mm
2–6	2–25

SilverLine
Page 70–81

- The all-rounder

N

HA
HB

ZEFP	Ø DC mm
3–6	3–25

S-Cut
Page 82–87

- All-rounder with soft cut and low power consumption

SC UNI

HB

ZEFP	Ø DC mm
4–5	3–25

BlueLine
Page 88–113

- For all types of machining in hardened steels up to 65 HRC

H

HA
HB

ZEFP	Ø DC mm
2–10	0,1–20

14

Overview High Performance Milling Cutters

MonsterMill

	Tool type	Number of teeth ZEFP	Diameter in mm Ø DC	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Performance
	SCR	4–6	3–20	●	○	●	○	○	○		■	■		■	HPC	■		13–18
	SCR	3–4	3–16	●	○	●	○	○	○				■	■	HPC	■		19
	SCR	4	3–16	●		●	○		○			■		■	HPC	■		20
	ICR	3–5	1,5–20	○	●	○	○	●	○		■			■	HPC	■		21+22
	TCR	4–5	4–20		○			●				■		■	HPC	■	□	23–25
	TCR	4	2–16		○			●					■	■		■	□	26
	TCR	2–5	2–16		○			●				■		■	HPC	■	□	27
	HCR	2–4	0,2–12	○					●			■		■		■		28–30
	HCR	2–4	0,2–12	○					●				■	■		■		31–33
	PCR UNI	4	5,7–20	●	○	●						■		■	HPC	■		34+35
	PCR ALU	4	5–20				●					■		■	HPC	■		36
	MCR	3–4	1–20	●	○	●	○	○	○		■			■	HPC	■		37

CircularLine

	CCR UNI	5–6	6–20	●	○	●		○			■	■		■	HPC	■		38–42
	CCR AL	4	6–20				●				■	■		■		■		43–45
	CCR Ti	5	6–20		○			●				■		■	HPC	■	□	46
	CCR H	6	6–20						●			■		■		■		47

Overview High Performance Milling Cutters

	Tool type	Number of teeth ZEFP	Diameter in mm Ø DC	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Performance
AluLine																		
	W	2	2–20				● HA				■			■		■	□	48+49
	W	3	3–20				● HA			■				■		■	□	50+51
	W	3	3–20				● HA		HB		■			■	HPC	■		52–54
	W	3	5–20				● HA		HB			■		■			□	55+56
	W	3	3–20				● HA					■		■	HPC	■		57–59
	WF	3	5–20				● HA		HB			■		■		■		60
	WR	3	6–20				● HA		HB		■			■	HPC	■		61+62
	W	4	3–25				● HA		HB		■			■	HPC	■	□	63–67
	W	6	6–20				● HA			■				■	HPC	■		68
	W	2	3–20				● HA						■	■			□	69
SilverLine																		
	N	3	3–20	●	●	○	○	●	HB		■	■		■	HPC	■		70+71
	N	4	3–20	●	●	●	○	●	HB		■	■		■	HPC	■		72–77
	N	6	6–25	●	●	○	○	●	HA	■				■		■		78
	N	3	4–20	●	●	○	○	●	HA				■	■	HPC	■		79
	H	4	6–20	●		●	○		● HA			■		■	HPC	■		80+81
S-Cut																		
	SC UNI	4	3–25	●	●	●	○	○	○ HB	■	■	■		■	HPC	■		82–86
	SC UNI	5	6–20	●	●	●		○	HB		■			■	HPC	■		87

14

Overview High Performance Milling Cutters

	Tool type	Number of teeth ZEFP	Diameter in mm Ø DC	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Performance
BlueLine																		
	H	2	0,2–3	● HA					●	■				■		■		88–90
	H	2	0,2–3	● HA					●				■	■		■		91–93
	H	2	0,4–3	● HA					●			■		■		■		94–97
	H	2	0,5–20	● HA					●		■			■		■		98
	H	4–6	1–20	● HA					● HB			■		■		■		99–101
	H	4–10	2–20	● HA					● HB	■		■		■		■		102+103
	H	2	0,1–20	● HA					● HB				■	■		■		104–108
	H	3	3–12	● HA					●				■	■		■		109
	H	4	2–20	○ HA					● HB				■	■		■		110
	H	2	0,5–16	● HA					● HB			■		■		■		111–113
Micro-Cutter																		
	N	2	0,2–2	● HA		●	●	●	●	■				■		■		114
	N	2	0,2–2	● HA		●	●	●	●				■	■		■		115+116
	N	2	0,5–2	● HA		●	●	●	●			■		■		■		117
MultiChange																		
	PDC	2	8–16				●				■						□	119
	AL	3	10–20				●					■				■		119
	PCR	4	9,7–20	●	○	●	●					■			HPC	■		120
	N	3–6	8–20	●	○	●	●		○	■	■	■	■		HPC	■		119–123

End Mills Overview

End Mills with Finishing Geometry

	Tool type	Number of teeth	Diameter in mm Ø DC	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Standard
	W	2	0,2–25	HA			●		HB	■	■	■		■	HPC	■	□	124–132
	W	3	3–25	HA			●		HB	■		■		■	HPC	■	□	133–135
	W	4	6–20	HA			●		HB	■				■	HPC	■	□	136+137
	W	5–7	6–20	HA			●			■				■	HPC	■	□	138
	N	2	0,2–20	●	○	●	○	○	○	■	■			■		■	□	139–146
	N	3	3–20	○	●	○	○	●	HB	■				■			□	147
	N	3	0,5–20	●	●	●	●	●	○	■	■			■		■	□	148–152
	N	4	1,5–20	●	○	●	○	○	○	■	■			■	HPC	■	□	153–155
	N	4	3–25	●	○	●	○	○	○		■			■		■	□	156
	N	4	2–12	○	●	○	●	●	○			■		■	HPC	■		157
	N	4	3–20	●	○	●	○	○	○			■		■		■		158
	N	4	3–20	●	●	●	○	●	HB	■	■	■		■	HPC	■		159–163
	N	6–8	4–32	○	●	○	●	●	●		■	■		■		■	□	164–166
	N	5–13	4–25	○	●	○	○	●			■			■		■		167
	N	8–16	6–20	○	●	○	●	●	○	■				■		■		168
	H	4	4–20	●					○		■	■		■		■		169+170
	H	6–8	4–32	○	●	○	●	●	●	■	■			■		■		171+172

14

Overview of end milling, ball-nosed and torus cutters

	Tool type	Number of teeth ZEFP	Diameter in mm Ø DC	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Standard
End Mills with Roughing and Finishing Geometry																		
	WF	4	5–20				●	○	HB							■		173
	NTR	3–4	6–20	●	○	●	○	○	○ HB							■		174
End Mills with Roughing Geometry																		
	WR	3	3–20				●		HA HB						HPC	■		175
	NR	4–6	4–25	●	●	●	○	●	HB							■		176–178
	HR	4–5	6–25	●	●	●		○	HA HB							■		179–181
Ball Nosed End Mills with Finishing Geometry																		
	W	2	0,2–20				●	○	HA						HPC	■	□	182–187
	N	2	0,1–20	●	○	●	○	○	○ HA HB							■	□	188–193
	N	2	1–12	●	○	●	○	○	○ HA							■		194
	N	2	3–20	●	●	○	○	●	HB						HPC	■		195
	N	4	3–20	●	●	○	●	●	○ HA HB						HPC	■		196–198
	H	2	0,2–20	●	○	●	○	○	○ HA							■		199–201
Ball Nosed End Mills with Roughing Geometry																		
	NR	4	6–20	●	○	●	○	○	HB							■		202
Torus Milling Cutters with Finishing Geometry																		
	W	2	0,2–12				●		HA							■		203–206
	W	2	2–12				●		HA							■		207
	W	4	4–12				●		HA							■		208+209
	N	2	0,5–16	●	○	●	○	○	○ HA							■		210
	H	2	0,2–12	●	○	●	○	○	○ HA							■		211–214
	H	4–8	3–16	●		○	○		● HA HB							■		215

Overview Special Milling Cutters

	Tool type	Number of teeth	Diameter in mm	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Performance / WNT \ Standard	
Intermediate Size Torus End Mills																			
	H	4	7–17	○ HA	●	○	●	●	○			■		■		■			216
High Feed Cutter																			
	N	4	6–16	● HA	○	○	○	○	●			■		■	HFC	■			217+218
Form / Chamfering and Die Sinking / Deburring Cutters																			
	W	1	3–6	○ HA	○	○	●	○									□		219
	N	4	4–12	● HB	○	●	○	○	○							■	□		220
	N	4	4–12	● HB	○	●	○	○	○							■	□		221
	N	4	3–12	● HA	○	●	○	○	○							■	□		222
	N	4	PRFRAD 0,5–6	● HA	○	●	○	○	○							■			223
	N	4–6	2–16	● HA	○	●	○	○	○ HB							■			224+225
			3–16	●	○	●	○	○	●								□		226+227
Circular saw blades																			
	NR	24–160	15–63	●	●	●	●	●	○								□		228–230

14

Overview Special Milling Cutters

Plastics-, GFK-, CFK-Cutters

	Tool type	Number of teeth	Diameter in mm Ø DC	Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat resistant alloys	hardened materials	Sharp	Chamfer	Radius	Full Radius	Length	Tool design	coated	uncoated	WNT \ Standard
	W		2–20				●										□	232
	W		2–20				●										□	233
	W		2–20				●									■		234
	W		5–44				●			■						■		235+236
	W	2	2–12				●									■		237
	W	1	1,5–20				●										□	238
	W	1	1,5–12				●									■		239
	W	2	2–12				●									■		240
	W	3	3–20				●						■			■		241
	N	2	2–12	●	○	●	○	○									□	242

MonsterMill – End milling cutter

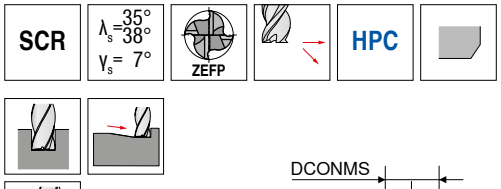



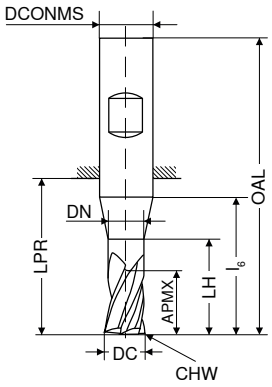

										DIN 6527 HA V2		DIN 6527 HB V2		DIN 6527 HA V2		DIN 6527 HB V2	
DC f8	APMX	DN	LH	l6	LPR	OAL	DCONMS h5	CHW	ZEFP	Article no. 52 600 ...		Article no. 52 601 ...		Article no. 52 602 ...		Article no. 52 603 ...	
mm	mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3,0	5	2,9	9	14	14	50	6	0,07	4	41,43	030	41,43	030				
3,0	8	2,9	14	20	22	58	6	0,07	4					41,43	030	41,43	030
3,5	5	3,4	9	14	14	50	6	0,07	4	41,43	035	41,43	035				
3,5	8	3,4	14	20	22	58	6	0,07	4					41,43	035	41,43	035
4,0	8	3,8	12	18	18	54	6	0,07	4	41,43	040	41,43	040				
4,0	11	3,8	18	20	22	58	6	0,07	4					41,43	040	41,43	040
4,5	9	4,3	12	18	18	54	6	0,07	4	42,21	045	42,21	045				
4,5	13	4,3	18	20	22	58	6	0,07	4					42,21	045	42,21	045
5,0	9	4,8	16	18	18	54	6	0,07	4	42,21	050	42,21	050				
5,0	13	4,8	19	20	22	58	6	0,07	4					42,21	050	42,21	050
5,5	9	5,3	16	18	18	54	6	0,07	4	40,88	055	40,88	055				
5,5	13	5,3	19	20	22	58	6	0,07	4					40,88	055	40,88	055
6,0	10	5,8		16	18	54	6	0,07	4	40,88	060	40,88	060				
6,0	13	5,8		20	22	58	6	0,07	4					40,88	060	40,88	060
6,5	12	6,3	18	20	23	59	8	0,07	4	54,44	065	54,44	065				
6,5	19	6,3	23	25	28	64	8	0,07	4					54,44	065	54,44	065
7,0	12	6,8	18	20	23	59	8	0,07	4	54,44	070	54,44	070				
7,0	19	6,8	23	25	28	64	8	0,07	4					54,44	070	54,44	070
7,5	12	7,3	18	20	23	59	8	0,12	4	54,44	075	54,44	075				
7,5	19	7,3	23	25	28	64	8	0,12	4					54,44	075	54,44	075
8,0	12	7,7		20	23	59	8	0,12	4	54,44	080	54,44	080				
8,0	19	7,7		25	28	64	8	0,12	4					54,44	080	54,44	080
8,5	15	8,2	22	24	27	67	10	0,20	4	71,09	085	71,09	085				
8,5	22	8,2	28	30	33	73	10	0,20	4					71,09	085	71,09	085
9,0	15	8,7	22	24	27	67	10	0,20	4	71,09	090	71,09	090				
9,0	22	8,7	28	30	33	73	10	0,20	4					71,09	090	71,09	090
9,5	15	9,2	22	24	27	67	10	0,20	4	71,09	095	71,09	095				
9,5	22	9,2	28	30	33	73	10	0,20	4					71,09	095	71,09	095
10,0	15	9,5		24	27	67	10	0,20	4	71,09	100	71,09	100				
10,0	22	9,5		30	33	73	10	0,20	4					71,09	100	71,09	100
11,0	18	10,5	24	26	28	73	12	0,20	4	112,40	110	112,40	110				
11,0	26	10,5	32	35	39	84	12	0,20	4					112,40	110	112,40	110
11,5	18	11,0	24	26	28	73	12	0,20	4	112,40	115	112,40	115				
11,5	26	11,0	32	35	39	84	12	0,20	4					112,40	115	112,40	115
12,0	18	11,5		26	28	73	12	0,20	4	112,40	120	112,40	120				
12,0	26	11,5		35	39	84	12	0,20	4					112,40	120	112,40	120
14,0	21	13,5		28	30	75	14	0,20	4	144,40	140	144,40	140				
14,0	26	13,5		35	39	84	14	0,20	4					144,40	140	144,40	140
15,0	24	14,5	30	32	35	83	16	0,20	4	177,50	150	177,50	150				
15,0	32	14,5	38	40	45	93	16	0,20	4					177,50	150	177,50	150
15,5	24	15,0	30	32	35	83	16	0,20	4	177,50	155	177,50	155				
15,5	32	15,0	38	40	45	93	16	0,20	4					177,50	155	177,50	155

Steel	●	●	●	●
Stainless steel	○	●	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 244+245

14

Continued on next page

MonsterMill – End milling cutter

SCR | λ_s=35° γ_s= 7° | ZEFP | HPC



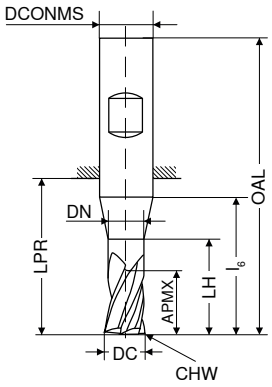

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

HA | HB | HA | HB

V2 | V2 | V2 | V2

DC $_{f8}$	APMX	DN	LH	l_6	LPR	OAL	DCONMS $_{h5}$	CHW	ZEFP	Article no. 52 600 ...		Article no. 52 601 ...		Article no. 52 602 ...		Article no. 52 603 ...	
mm	mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
16,0	24	15,5		32	35	83	16	0,20	4	177,50	**160**	177,50	**160**				
16,0	24	15,5		32	35	83	16	0,20	5	188,60	**161** [1]	188,60	**161** [1]				
16,0	32	15,5		40	45	93	16	0,20	5					188,60	**161** [1]	188,60	**161** [1]
16,0	32	15,5		40	45	93	16	0,20	4					177,50	**160**	177,50	**160**
17,0	27	16,5	32	34	37	85	18	0,20	4	241,40	**170**	241,40	**170**				
17,0	32	16,5	48	50	52	100	18	0,20	4					241,40	**170**	241,40	**170**
18,0	27	17,5		34	37	85	18	0,20	4	241,40	**180**	241,40	**180**				
18,0	27	17,5		34	37	85	18	0,20	5	255,70	**181** [1]	255,70	**181** [1]				
18,0	32	17,5		50	52	100	18	0,20	5					255,70	**181** [1]	255,70	**181** [1]
18,0	32	17,5		50	52	100	18	0,20	4					241,40	**180**	241,40	**180**
19,0	30	18,5	38	40	43	93	20	0,30	4	274,50	**190**	274,50	**190**				
19,0	38	18,5	48	50	54	104	20	0,30	4					274,50	**190**	274,50	**190**
19,5	30	19,0	38	40	43	93	20	0,30	4	274,50	**195**	274,50	**195**				
19,5	38	19,0	48	50	54	104	20	0,30	4					274,50	**195**	274,50	**195**
20,0	30	19,5		40	43	93	20	0,30	4	274,50	**200**	274,50	**200**				
20,0	30	19,5		40	43	93	20	0,30	5	289,90	**201** [1]	289,90	**201** [1]				
20,0	38	19,5		50	54	104	20	0,30	5					289,90	**201** [1]	289,90	**201** [1]
20,0	38	19,5		50	54	104	20	0,30	4					274,50	**200**	274,50	**200**

Steel	●	●	●	●
Stainless steel	○	●	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 244+245

MonsterMill – End milling cutter

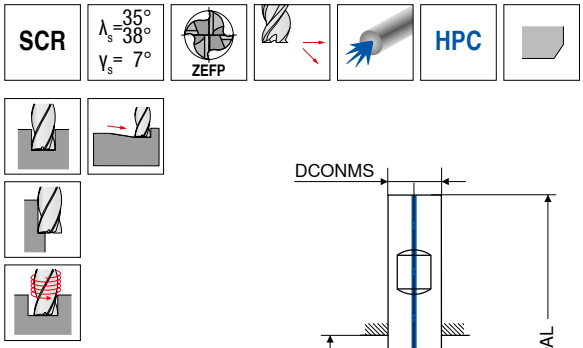

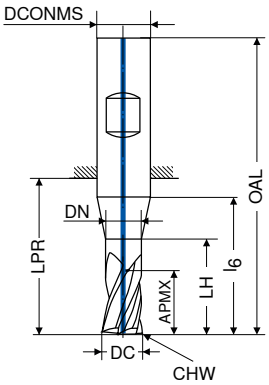

Ti1200

DIN 6527

HB

V2

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 52 606 ... EUR	
3	8	2,9	14	20	22	58	6	0,07	4	50,81	**030**
4	11	3,8	18	20	22	58	6	0,07	4	50,81	**040**
5	13	4,8	19	20	22	58	6	0,07	4	51,58	**050**
6	13	5,8		20	22	58	6	0,07	4	50,03	**060**
8	19	7,7		25	28	64	8	0,12	4	65,47	**080**
10	22	9,5		30	33	73	10	0,20	4	84,20	**100**
12	26	11,5		35	39	84	12	0,20	4	133,30	**120**
14	26	13,5		35	39	84	14	0,20	4	184,10	**140**
16	32	15,5		40	45	93	16	0,20	4	226,00	**160**
18	32	17,5		50	52	100	18	0,20	4	313,00	**180**
20	38	19,5		50	54	104	20	0,30	4	362,70	**200**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 244+245

14

MonsterMill – End milling cutter

SCR | λ_s=35° γ_s= 7° | ZEFP | HPC



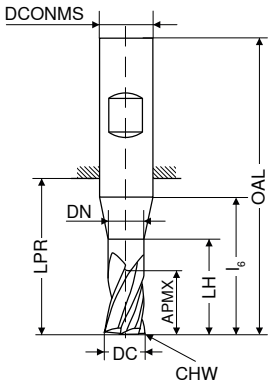

Factory standard | Factory standard

HB | HB

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	V2 Article no. 52 604 ... EUR		V2 Article no. 52 605 ... EUR	
3	5	2,9	14	20	22	58	6	0,07	4	41,43	030		
3	5	2,9	19	23	26	62	6	0,07	4			48,28	030
4	8	3,8	18	20	22	58	6	0,07	4	41,43	040		
4	8	3,8	23	25	26	62	6	0,07	4			48,28	040
5	9	4,8	19	20	22	58	6	0,07	4	42,21	050		
5	9	4,8	24	25	26	62	6	0,07	4			49,26	050
6	10	5,8		20	22	58	6	0,07	4	40,88	060		
6	10	5,8		25	26	62	6	0,07	4			47,83	060
8	12	7,7		25	28	64	8	0,12	4	54,44	080		
8	12	7,7		30	32	68	8	0,12	4			63,26	080
10	15	9,5		30	33	73	10	0,20	4	71,09	100		
10	15	9,5		35	40	80	10	0,20	4			81,78	100
12	18	11,5		35	39	84	12	0,20	4	112,40	120		
12	18	11,5		45	48	93	12	0,20	4			129,00	120
14	21	13,5		35	39	84	14	0,20	4	144,40	140		
14	21	13,5		50	54	99	14	0,20	4			174,10	140
16	24	15,5		40	45	93	16	0,20	4	177,50	160		
16	24	15,5		40	45	93	16	0,20	5	188,60	161 [1]		
16	24	15,5		55	60	108	16	0,20	4			210,50	160
16	24	15,5		55	60	108	16	0,20	5			221,50	161 [1]
18	27	17,5		50	52	100	18	0,20	4	241,40	180		
18	27	17,5		50	52	100	18	0,20	5	255,70	181 [1]		
18	27	17,5		60	66	114	18	0,20	4			298,80	180
18	27	17,5		60	66	114	18	0,20	5			314,10	181 [1]
20	30	19,5		50	54	104	20	0,30	4	274,50	200		
20	30	19,5		50	54	104	20	0,30	5	289,90	201 [1]		
20	30	19,5		70	76	126	20	0,30	4			335,10	200
20	30	19,5		70	76	126	20	0,30	5			351,60	201 [1]

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 244-247

MonsterMill – End milling cutter with corner radius

SCR | λ_s=35°–38° γ_s= 7° | ZEFP | HPC | Ti1200



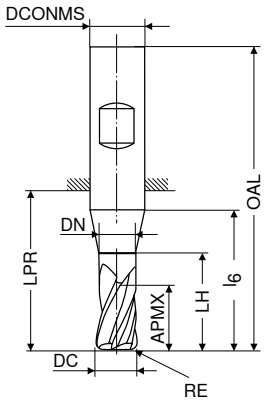

Factory standard

HB

V2

DC f8	RE ±0,01	APMX	DN	LH	l_6	LPR	OAL	DCONMS h5	ZEFP	Article no. 52 607 ...
mm	mm	mm	mm	mm	mm	mm	mm	mm		EUR
3	0,10	8	2,9	14	20	22	58	6	4	46,96 030
3	0,30	8	2,9	14	20	22	58	6	4	46,96 031
3	0,50	8	2,9	14	20	22	58	6	4	46,96 032
4	0,10	11	3,8	18	20	22	58	6	4	46,96 040
4	0,40	11	3,8	18	20	22	58	6	4	46,96 041
4	0,50	11	3,8	18	20	22	58	6	4	46,96 042
5	0,10	13	4,8	19	20	22	58	6	4	47,94 050
5	0,50	13	4,8	19	20	22	58	6	4	47,94 051
5	1,00	13	4,8	19	20	22	58	6	4	47,94 052
6	0,10	13	5,8		20	22	58	6	4	46,29 060
6	0,50	13	5,8		20	22	58	6	4	46,29 061
6	1,00	13	5,8		20	22	58	6	4	46,29 062
8	0,15	19	7,7		25	28	64	8	4	61,71 080
8	0,50	19	7,7		25	28	64	8	4	61,71 081
8	1,00	19	7,7		25	28	64	8	4	61,71 082
8	2,00	19	7,7		25	28	64	8	4	61,71 083
10	0,15	22	9,5		30	33	73	10	4	80,57 100
10	0,50	22	9,5		30	33	73	10	4	80,57 101
10	1,00	22	9,5		30	33	73	10	4	80,57 102
10	1,50	22	9,5		30	33	73	10	4	80,57 103
10	2,00	22	9,5		30	33	73	10	4	80,57 104
12	0,20	26	11,5		35	39	84	12	4	127,80 120
12	0,50	26	11,5		35	39	84	12	4	127,80 121
12	1,00	26	11,5		35	39	84	12	4	127,80 122
12	1,50	26	11,5		35	39	84	12	4	127,80 123
12	2,00	26	11,5		35	39	84	12	4	127,80 124
14	1,00	26	13,5		35	39	84	14	4	164,20 140
16	0,30	32	15,5		40	45	93	16	4	201,80 160
16	0,50	32	15,5		40	45	93	16	4	201,80 161
16	1,00	32	15,5		40	45	93	16	4	201,80 162
16	2,00	32	15,5		40	45	93	16	4	201,80 163
16	4,00	32	15,5		40	45	93	16	4	201,80 164
20	0,30	38	19,5		50	54	104	20	4	311,90 200
20	0,50	38	19,5		50	54	104	20	4	311,90 201
20	1,00	38	19,5		50	54	104	20	4	311,90 202
20	2,00	38	19,5		50	54	104	20	4	311,90 203

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 244+245

14

MonsterMill – End milling cutter

SCR | λ_s=35° γ_s= 7° | ZEFP | HPC

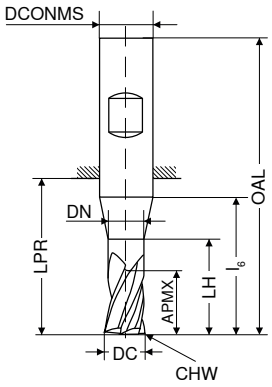

DIN 6527 | DIN 6527 | DIN 6527 | Factory standard

HA | HA | HB | HA

V2 | V2 | V2 | V2

DC $_{f8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	CHW mm	ZEFP	Article no. 52 608 ... EUR		Article no. 52 608 ... EUR		Article no. 52 608 ... EUR		Article no. 52 608 ... EUR	
5	9	4,8	16	18	18	54	6	0,12	6	55,55	**050**						
5	13	4,8	19	20	22	58	6	0,12	6			55,55	**051**				
5	13	4,8	24	25	26	62	6	0,12	6							62,93	**052**
6	10	5,8		16	18	54	6	0,12	6	53,68	**060**						
6	13	5,8		20	22	58	6	0,12	6			53,68	**061**				
6	13	5,8		25	26	62	6	0,12	6							61,16	**062**
8	12	7,7		20	23	59	8	0,12	6	71,42	**080**						
8	19	7,7		25	28	64	8	0,12	6			71,42	**081**				
8	19	7,7		30	32	68	8	0,12	6							80,79	**082**
10	15	9,5		24	27	67	10	0,20	6	93,35	**100**						
10	22	9,5		30	33	73	10	0,20	6			93,35	**101**	93,35	**103**		
10	22	9,5		35	40	80	10	0,20	6							104,60	**102**
12	18	11,5		26	28	73	12	0,20	6	147,80	**120**						
12	26	11,5		35	39	84	12	0,20	6			147,80	**121**	147,80	**123**		
12	26	11,5		45	48	93	12	0,20	6							164,20	**122**
16	24	15,5		32	35	83	16	0,20	6	234,80	**160**						
16	32	15,5		40	45	93	16	0,20	6			234,80	**161**	234,80	**163**		
16	32	15,5		55	60	108	16	0,20	6							271,10	**162**
20	30	19,5		40	43	93	20	0,30	6	361,50	**200**						
20	38	19,5		50	54	104	20	0,30	6			361,50	**201**	361,50	**203**		
20	38	19,5		70	76	126	20	0,30	6							432,10	**202**

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 244–247

MonsterMill – Ball nosed cutter

▲ Radius accuracy: -0,015 mm for Ø ≤ 6,0 mm / -0,02 mm for Ø > 6,0 mm

SCR | λ_s=35° 38° γ_s= 7° | ZEFP | HPC







DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

HA | HB | HA | HB

V2 | V2 | V2 | V2

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	Article no. 52 611 ... EUR		Article no. 52 611 ... EUR		Article no. 52 612 ... EUR		Article no. 52 612 ... EUR	
3	5	2,9	9	14	14	50	6	3	51,91	**030**						
3	8	2,9	14	20	22	58	6	3					54,01	**030**		
4	11	3,8	18	20	22	58	6	3					54,01	**040**		
4	8	3,8	12	18	18	54	6	3	51,91	**040**						
5	13	4,8	19	20	22	58	6	3					54,89	**050**		
5	9	4,8	16	18	18	54	6	3	52,90	**050**						
6	10	5,8		16	18	54	6	4	51,25	**060**	51,25	**061**				
6	13	5,8		20	22	58	6	4					53,24	**060**	53,24	**061**
8	19	7,7		25	28	64	8	4					70,76	**080**	70,76	**081**
8	12	7,7		20	23	59	8	4	68,11	**080**	68,11	**081**				
10	22	9,5		30	33	73	10	4					92,25	**100**	92,25	**101**
10	15	9,5		24	27	67	10	4	88,84	**100**	88,84	**101**				
12	26	11,5		35	39	84	12	4					145,50	**120**	145,50	**121**
12	18	11,5		26	28	73	12	4	140,00	**120**	140,00	**121**				
16	32	15,5		40	45	93	16	4					231,50	**160**	231,50	**161**
16	24	15,5		32	35	83	16	4	223,80	**160**	223,80	**161**				

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 244+245

14

MonsterMill – Torus face milling cutter

▲ r_{3D} = programmed corner radius

SCR | λ_s=45° γ_s= 7° | ZEFP | HPC | ≤ 60 HRC



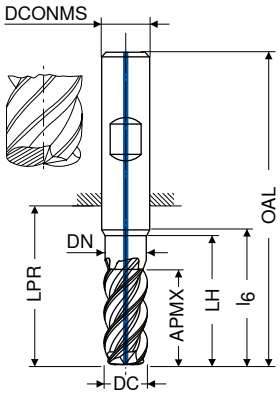

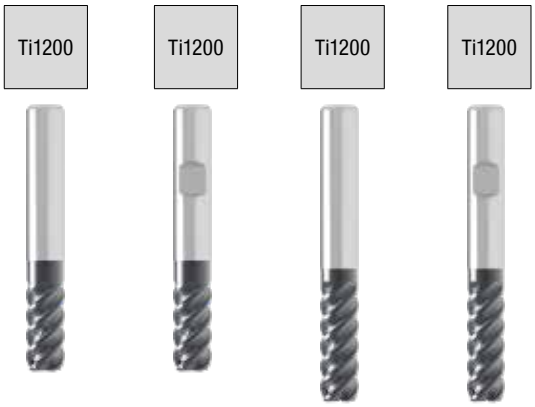



DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

LPR with Shank DIN 6535 HB

HA | HB | HA | HB

V2 | V2 | V2 | V2

DC $_{-0,04}$	r_{3D}	APMX	DN	LH	LPR	OAL	l_6	DCONMS $_{h5}$	t_{max}	ZEFP	Article no. 52 609 ...		Article no. 52 609 ...		Article no. 52 610 ...		Article no. 52 610 ...	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	0,4	3	2,9	14,00	21	57	20	6	0,10	4	101,50	**030**	101,50	**031**				
4	0,5	4	3,8	18,00	21	57	20	6	0,15	4	104,00	**040**	104,00	**041**				
5	0,6	5	4,8	18,00	21	57	20	6	0,20	4	115,80	**050**	115,80	**051**				
6	0,8	13	5,8	19,90	21	57	20	6	0,20	4	105,40	**060**	105,40	**061**				
8	1,0	19	7,7	24,85	27	63	25	8	0,30	4	121,30	**080**	121,30	**081**				
8	1,0	19	7,7	29,85	32	68	30	8	0,30	4					143,30	**080**	143,30	**081**
10	1,2	22	9,5	29,75	32	72	30	10	0,40	4	143,30	**100**	143,30	**101**				
10	1,2	22	9,5	34,75	40	80	35	10	0,40	4					152,10	**100**	152,10	**101**
12	1,6	26	11,5	34,75	38	83	35	12	0,40	4	183,00	**120**	183,00	**121**				
12	1,6	26	11,5	44,75	47	93	45	12	0,40	4					199,50	**120**	199,50	**121**
16	2,2	32	15,5	39,75	44	92	40	16	0,50	4	287,70	**160**	287,70	**161**				
16	2,2	32	15,5	54,75	60	108	55	16	0,50	4					303,10	**160**	303,10	**161**

Steel	●	●	●	●
Stainless steel				
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys				
hardened materials	○	○	○	○

→ v_c/f_z Page 248–251

MonsterMill – End milling cutter

ICR | λ_s=40° γ_s=10° | ZEFP | HPC



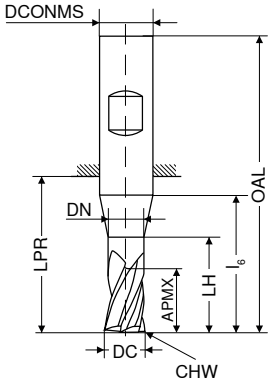

DIN 6527

HB

V1

Factory standard

HB

V1

Factory standard

HB

V1

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	Article no. 52 784 ...	EUR	Article no. 52 784 ...	EUR	Article no. 52 784 ...	EUR
1,5	2,3	1,4	6	14	21	57	6	0,04	3	**017**	56,76				
2,0	3,0	1,9	8	15	21	57	6	0,04	3	**022**	56,76				
2,5	3,8	2,4	10	16	21	57	6	0,07	3	**027**	56,76				
3,0	5,0	2,9	14	18	21	57	6	0,07	3	**032**	55,66				
3,0	8,0	2,9	14	18	21	57	6	0,07	3	**034**		59,63			
3,0	5,0	2,9	19	23	26	62	6	0,07	3	**036**			59,63		
4,0	8,0	3,8	18	20	21	57	6	0,07	3	**042**	56,76				
4,0	11,0	3,8	18	20	21	57	6	0,07	3	**044**		60,62			
4,0	8,0	3,8	23	25	26	62	6	0,07	3	**046**			60,62		
5,0	9,0	4,8	19	20	21	57	6	0,12	3	**052**	57,76				
5,0	13,0	4,8	19	20	21	57	6	0,12	3	**054**		61,61			
5,0	9,0	4,8	24	25	26	62	6	0,12	3	**056**			61,61		
6,0	10,0	5,8	20		21	57	6	0,12	4	**062**	58,64				
6,0	13,0	5,8	20		21	57	6	0,12	4	**064**		62,49			
6,0	10,0	5,8	25		26	62	6	0,12	4	**066**			62,49		
8,0	12,0	7,7	25		27	63	8	0,12	4	**082**	69,33				
8,0	19,0	7,7	25		27	63	8	0,12	4	**084**		73,07			
8,0	12,0	7,7	30		32	68	8	0,12	4	**086**			72,08		
10,0	15,0	9,5	30		32	72	10	0,20	4	**102**	88,39				
10,0	22,0	9,5	30		32	72	10	0,20	4	**104**		94,12			
10,0	15,0	9,5	35		40	80	10	0,20	4	**106**			94,12		
12,0	18,0	11,5	35		38	83	12	0,20	4	**122**	117,90				
12,0	26,0	11,5	35		38	83	12	0,20	4	**124**		124,60			
12,0	18,0	11,5	45		48	93	12	0,20	4	**126**			126,80		
14,0	21,0	13,5	35		38	83	14	0,20	4	**142**	162,00				
14,0	26,0	13,5	35		38	83	14	0,20	4	**144**		170,90			
14,0	21,0	13,5	50		54	99	14	0,20	4	**146**			183,00		
16,0	24,0	15,5	40		44	92	16	0,20	4	**161**	194,00				
16,0	24,0	15,5	40		44	92	16	0,20	5	**162** [1]	201,80				
16,0	32,0	15,5	40		44	92	16	0,20	4	**163**		203,80			
16,0	32,0	15,5	40		44	92	16	0,20	5	**164** [1]		216,00			
16,0	24,0	15,5	55		60	108	16	0,20	4	**165**			216,00		
16,0	24,0	15,5	55		60	108	16	0,20	5	**166** [1]			222,60		
18,0	27,0	17,5	40		44	92	18	0,20	4	**181**	250,20				
18,0	27,0	17,5	40		44	92	18	0,20	5	**182** [1]	264,60				
18,0	32,0	17,5	40		44	92	18	0,20	4	**183**		266,80			
18,0	32,0	17,5	40		44	92	18	0,20	5	**184** [1]		278,80			
18,0	27,0	17,5	60		66	114	18	0,20	4	**185**			287,70		
18,0	27,0	17,5	60		66	114	18	0,20	5	**186** [1]			302,00		
20,0	30,0	19,5	50		54	104	20	0,30	4	**201**	292,00				
20,0	30,0	19,5	50		54	104	20	0,30	5	**202** [1]	306,40				
20,0	38,0	19,5	50		54	104	20	0,30	4	**203**		308,60			
20,0	38,0	19,5	50		54	104	20	0,30	5	**204** [1]		325,10			
20,0	30,0	19,5	70		76	126	20	0,30	4	**205**			327,30		
20,0	30,0	19,5	70		76	126	20	0,30	5	**206** [1]			343,80		

Steel	○	○	○
Stainless steel	●	●	●
Cast iron	○	○	○
Non ferrous metals	○	○	○
Heat resistant alloys	●	●	●
hardened materials	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 252–257

14

MonsterMill – End Milling Cutter

▲ with axial through coolant

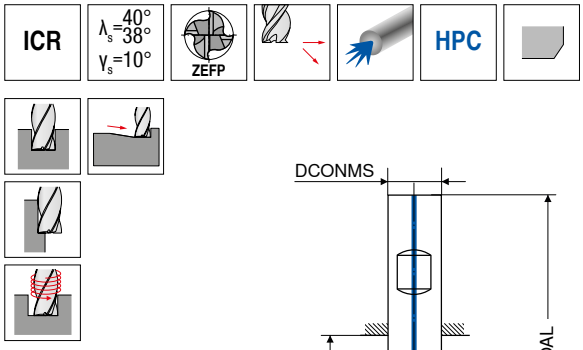

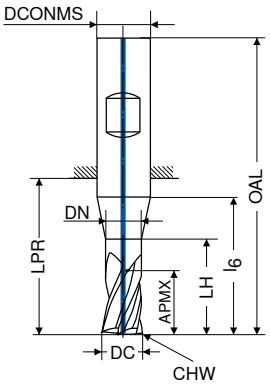

DIN 6527

HB

V1

DC e8 mm	APMX mm	DN mm	LH mm	l6 mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	Article no. 52 786 ... EUR	
3	8	2,9	14	18	21	57	6	0,07	3	65,36	**034**
4	11	3,8	18	20	21	57	6	0,07	3	66,34	**044**
5	13	4,8	19	20	21	57	6	0,12	3	67,34	**054**
6	13	5,8	20		21	57	6	0,12	4	68,22	**064**
8	19	7,7	25		27	63	8	0,12	4	80,02	**084**
10	22	9,5	30		32	72	10	0,20	4	101,90	**104**
12	26	11,5	35		38	83	12	0,20	4	135,50	**124**
14	26	13,5	35		38	83	14	0,20	4	198,30	**144**
16	32	15,5	40		44	92	16	0,20	4	233,60	**163**
16	32	15,5	40		44	92	16	0,20	5	245,80	**164** 1)
18	32	17,5	40		44	92	18	0,20	4	308,60	**183**
18	32	17,5	40		44	92	18	0,20	5	325,10	**184** 1)
20	38	19,5	50		54	104	20	0,30	4	365,90	**203**
20	38	19,5	50		54	104	20	0,30	5	382,40	**204** 1)

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	●
hardened materials	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 252–255

MonsterMill – End milling cutter with corner radius

▲ PRFRAD3 = 1 mm

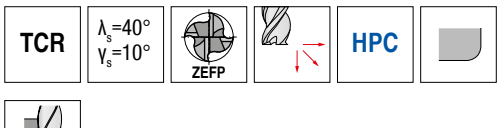

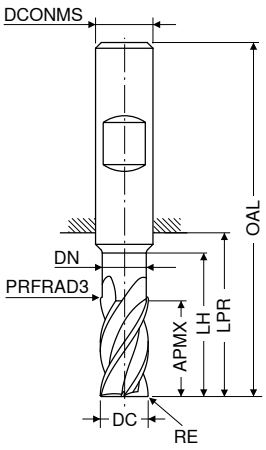

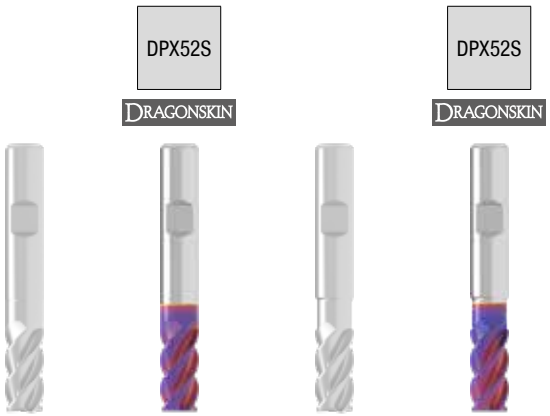

DC e8	RE	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Factory standard		Factory standard		Factory standard		Factory standard	
									HB		HB		HB		HB	
									NEW V1		NEW V1		NEW V1		NEW V1	
									Article no. 52 503 ...		Article no. 52 504 ...		Article no. 52 505 ...		Article no. 52 506 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
4	0,1	11		14	21	57	6	4	51,20	04000	58,07	04000				
4	0,1	11	3,8	17	21	57	6	5					55,75	04000 1)	62,63	04000 1)
5	0,1	13	4,8	19	21	57	6	5					58,30	05000 1)	65,18	05000 1)
5	0,1	13		16	21	57	6	4	51,20	05000	58,07	05000				
6	0,1	13	5,8	19	21	57	6	5					58,30	06000 1)	65,18	06000 1)
6	0,1	13			21	57	6	4	51,20	06000	58,07	06000				
8	0,2	21	7,7	25	27	63	8	5					71,02	08000 1)	80,72	08000 1)
8	0,2	21			27	63	8	4	71,02	08000	80,72	08000				
10	0,2	22	9,7	30	32	72	10	5					102,10	10000 1)	114,10	10000 1)
10	0,2	22			32	72	10	4	86,30	10000	98,28	10000				
12	0,2	26	11,6	36	38	83	12	5					128,70	12000 1)	142,10	12000 1)
12	0,2	26			38	83	12	4	92,42	12000	106,00	12000				
16	0,3	36	15,5	42	44	92	16	5					177,40	16000 1)	194,10	16000 1)
16	0,3	36			44	92	16	4	160,50	16000	177,00	16000				
20	0,3	41	19,5	52	54	104	20	5					285,50	20000 1)	305,90	20000 1)
20	0,3	41			54	104	20	4	233,80	20000	254,20	20000				

Steel				
Stainless steel	○	○	○	○
Cast iron				
Non ferrous metals				
Heat resistant alloys	●	●	●	●
hardened materials				

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 258+259

14

MonsterMill – End milling cutter with corner radius

▲ PRFRAD3 = 1 mm

TCR | λ_s=40° γ_s=10° | ZEFP | HPC

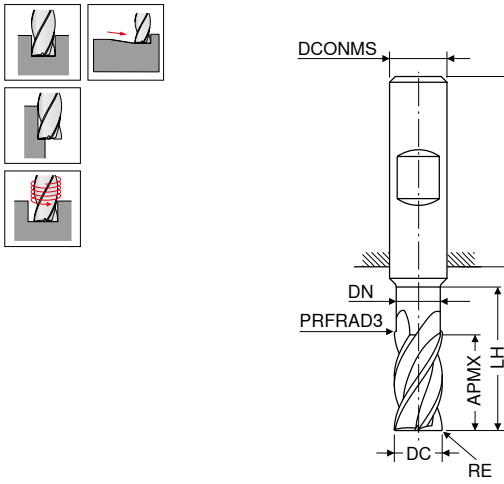

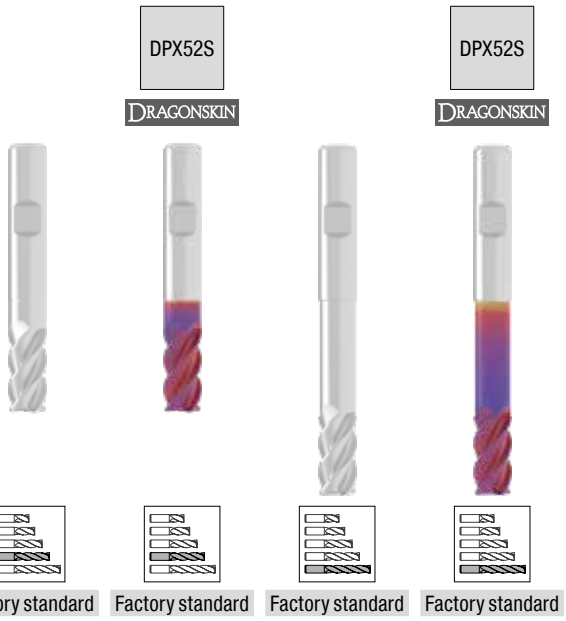

Factory standard | Factory standard | Factory standard | Factory standard

HB | HB | HB | HB

NEW V1 | NEW V1 | NEW V1 | NEW V1

DC e8	RE	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 52 507 ...		Article no. 52 508 ...		Article no. 52 507 ...		Article no. 52 508 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
4	0,4	8,5	3,8	20	26	62	6	4					53,73	04104	60,60	04104
4	0,5	8,5	3,8	20	26	62	6	4					53,73	04105	60,60	04105
4	0,8	8,5	3,8	20	26	62	6	4					53,73	04108	60,60	04108
4	0,2	11,0		14	21	57	6	4	51,20	04002	58,07	04002				
4	0,4	11,0		14	21	57	6	4	51,20	04004	58,07	04004				
4	0,5	11,0		14	21	57	6	4	51,20	04005	58,07	04005				
5	0,5	10,5	4,8	25	34	70	6	4					60,35	05105	67,23	05105
5	0,8	10,5	4,8	25	34	70	6	4					60,35	05108	67,23	05108
5	0,5	13,0		16	21	57	6	4	53,73	05005	60,60	05005				
5	1,0	13,0		16	21	57	6	4	53,73	05010	60,60	05010				
6	0,4	13,0			21	57	6	4	53,73	06004	60,60	06004				
6	0,5	13,0			21	57	6	4	53,73	06005	60,60	06005				
6	0,6	13,0			21	57	6	4	53,73	06006	60,60	06006				
6	0,6	13,0	5,8	30	34	70	6	4					63,93	06106	70,80	06106
6	0,8	13,0			21	57	6	4	53,73	06008	60,60	06008				
6	0,8	13,0	5,8	30	34	70	6	4					63,93	06108	70,80	06108
6	1,0	13,0	5,8	30	34	70	6	4					63,93	06110	70,80	06110
6	1,0	13,0			21	57	6	4	56,52	06010	63,40	06010				
6	1,5	13,0			21	57	6	4	56,52	06015	63,40	06015				
8	0,8	17,0	7,7	40	44	80	8	4					89,13	08108	98,80	08108
8	1,0	17,0	7,7	40	44	80	8	4					89,13	08110	98,80	08110
8	1,5	17,0	7,7	40	44	80	8	4					89,13	08115	98,80	08115
8	2,0	17,0	7,7	40	44	80	8	4					89,13	08120	98,80	08120
8	0,5	21,0			27	63	8	4	71,02	08005	80,72	08005				
8	0,8	21,0			27	63	8	4	71,02	08008	80,72	08008				
8	1,0	21,0			27	63	8	4	74,10	08010	83,77	08010				
8	1,2	21,0			27	63	8	4	74,10	08012	83,77	08012				
8	1,5	21,0			27	63	8	4	74,10	08015	83,77	08015				
8	2,0	21,0			27	63	8	4	74,10	08020	83,77	08020				
10	0,5	21,0	9,7	50	54	94	10	4					109,70	10105	121,70	10105
10	1,0	21,0	9,7	50	54	94	10	4					109,70	10110	121,70	10110
10	1,5	21,0	9,7	50	54	94	10	4					109,70	10115	121,70	10115
10	2,0	21,0	9,7	50	54	94	10	4					109,70	10120	121,70	10120
10	0,5	22,0			32	72	10	4	86,30	10005	98,28	10005				
10	1,0	22,0			32	72	10	4	89,13	10010	101,10	10010				
10	1,2	22,0			32	72	10	4	89,13	10012	101,10	10012				
10	1,5	22,0			32	72	10	4	89,13	10015	101,10	10015				
10	1,6	22,0			32	72	10	4	89,13	10016	101,10	10016				
10	2,0	22,0			32	72	10	4	89,13	10020	101,10	10020				
12	0,5	25,0	11,6	60	65	110	12	4					137,80	12105	151,20	12105
12	1,0	25,0	11,6	60	65	110	12	4					137,80	12110	151,20	12110
12	1,5	25,0	11,6	60	65	110	12	4					137,80	12115	151,20	12115
12	2,0	25,0	11,6	60	65	110	12	4					137,80	12120	151,20	12120

Steel				
Stainless steel	○	○	○	○
Cast iron				
Non ferrous metals				
Heat resistant alloys	●	●	○	○
hardened materials				

→ v_c/f_z Page 258+259

Continued on next page

MonsterMill – End milling cutter with corner radius

▲ PRFRAD3 = 1 mm

TCR | λ_s=40° γ_s=10° | ZEFP | HPC

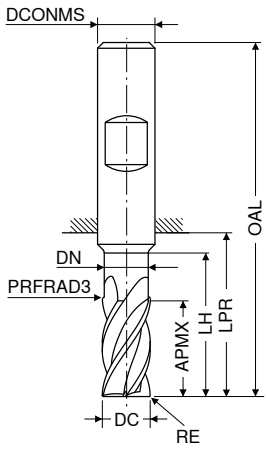

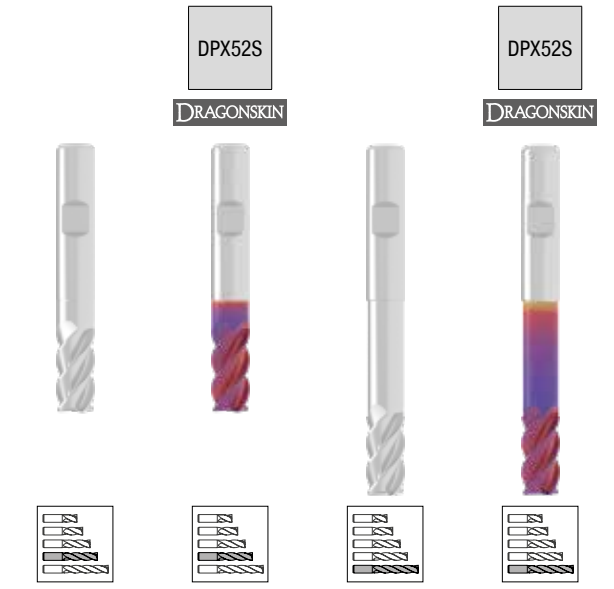

DC $_{e8}$	RE	APMX	DN	LH	LPR	OAL	DCONMS $_{h5}$	ZEFP	Factory standard		Factory standard		Factory standard		Factory standard	
									HB		HB		HB		HB	
									NEW V1		NEW V1		NEW V1		NEW V1	
									Article no. 52 507 ...		Article no. 52 508 ...		Article no. 52 507 ...		Article no. 52 508 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
12	3,0	25,0	11,6	60	65	110	12	4					141,00	12130	154,50	12130
12	4,0	25,0	11,6	60	65	110	12	4					141,00	12140	154,50	12140
12	0,5	26,0			38	83	12	4	92,42	12005	106,00	12005				
12	1,0	26,0			38	83	12	4	95,50	12010	109,00	12010				
12	1,2	26,0			38	83	12	4	95,50	12012	109,00	12012				
12	1,5	26,0			38	83	12	4	95,50	12015	109,00	12015				
12	1,6	26,0			38	83	12	4	95,50	12016	109,00	12016				
12	2,0	26,0			38	83	12	4	95,50	12020	109,00	12020				
12	2,5	26,0			38	83	12	4	95,50	12025	109,00	12025				
12	3,0	26,0			38	83	12	4	95,50	12030	109,00	12030				
14	1,0	29,0	13,6	70	75	120	14	4					190,90	14110	207,50	14110
14	2,0	29,0	13,6	70	75	120	14	4					190,90	14120	207,50	14120
14	3,0	29,0	13,6	70	75	120	14	4					194,30	14130	210,80	14130
14	4,0	29,0	13,6	70	75	120	14	4					194,30	14140	210,80	14140
16	1,0	33,0	15,5	80	84	132	16	4					229,20	16110	245,80	16110
16	2,0	33,0	15,5	80	84	132	16	4					229,20	16120	245,80	16120
16	3,0	33,0	15,5	80	84	132	16	4					232,20	16130	248,80	16130
16	4,0	33,0	15,5	80	84	132	16	4					232,20	16140	248,80	16140
16	1,0	36,0			44	92	16	4	167,50	16010	184,10	16010				
16	1,6	36,0			44	92	16	4	167,50	16016	184,10	16016				
16	2,0	36,0			44	92	16	4	167,50	16020	184,10	16020				
16	2,5	36,0			44	92	16	4	167,50	16025	184,10	16025				
16	3,0	36,0			44	92	16	4	167,50	16030	184,10	16030				
16	3,2	36,0			44	92	16	4	171,60	16032	188,10	16032				
16	4,0	36,0			44	92	16	4	171,60	16040	188,10	16040				
18	1,0	38,0	17,5	90	94	142	18	4					298,70	18110	319,10	18110
18	2,0	38,0	17,5	90	94	142	18	4					298,70	18120	319,10	18120
18	3,0	38,0	17,5	90	94	142	18	4					302,00	18130	322,40	18130
18	4,0	38,0	17,5	90	94	142	18	4					302,00	18140	322,40	18140
20	2,0	41,0			54	104	20	4	233,80	20020	254,20	20020				
20	3,0	41,0			54	104	20	4	233,80	20030	254,20	20030				
20	4,0	41,0			54	104	20	4	238,10	20040	258,40	20040				
20	5,0	41,0			54	104	20	4	238,10	20050	258,40	20050				
20	6,3	41,0			54	104	20	4	241,40	20063	261,80	20063				
20	1,0	42,0	19,5	100	104	154	20	4					326,50	20110	346,80	20110
20	2,0	42,0	19,5	100	104	154	20	4					326,50	20120	346,80	20120
20	3,0	42,0	19,5	100	104	154	20	4					329,50	20130	349,90	20130
20	4,0	42,0	19,5	100	104	154	20	4					329,50	20140	349,90	20140

Steel				
Stainless steel	○	○	○	○
Cast iron				
Non ferrous metals				
Heat resistant alloys	●	●	○	○
hardened materials				

→ v_c/f_z Page 258+259

14

MonsterMill – Ball nosed cutter

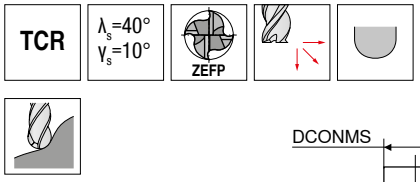

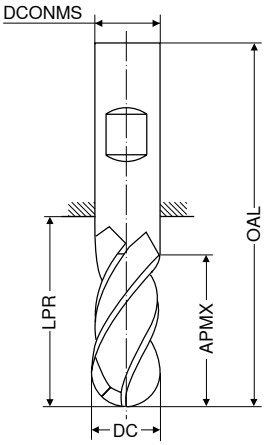

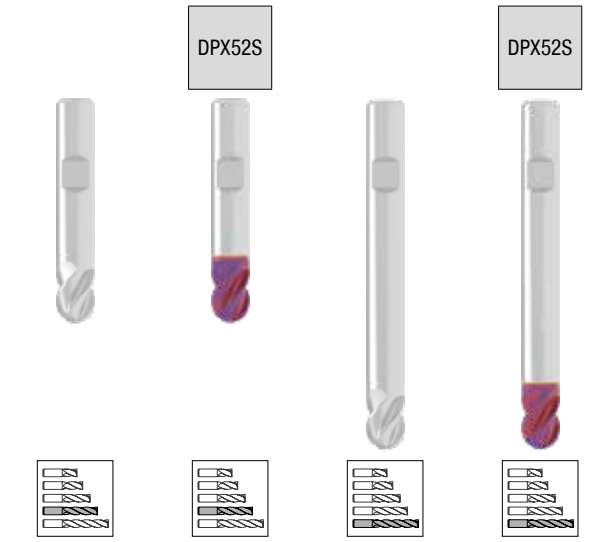

DC e8	APMX	LPR	OAL	DCONMS h5	ZEFP	Factory standard HB		NEW V1 Article no. 52 513 ...		Factory standard HB		NEW V1 Article no. 52 514 ...		Factory standard HB		NEW V1 Article no. 52 513 ...		Factory standard HB		NEW V1 Article no. 52 514 ...	
mm	mm	mm	mm	mm		EUR				EUR				EUR				EUR			
2	4	18	54	6	4	43,56	02000			53,73	02000										
2	4	44	80	6	4											63,40	02100			75,90	02100
3	5	44	80	6	4											63,40	03100			75,90	03100
3	5	18	54	6	4	43,56	03000			53,73	03000										
4	8	44	80	6	4											63,40	04100			75,90	04100
4	8	18	54	6	4	43,56	04000			53,73	04000										
5	9	44	80	6	4											67,23	05100			79,42	05100
5	9	18	54	6	4	47,12	05000			59,85	05000										
6	10	44	80	6	4											67,23	06100			79,42	06100
6	10	18	54	6	4	47,12	06000			59,85	06000										
8	12	64	100	8	4											68,47	08100			85,05	08100
8	12	22	58	8	4	52,45	08000			68,00	08000										
10	14	60	100	10	4											88,85	10100			109,00	10100
10	14	26	66	10	4	70,27	10000			89,88	10000										
12	16	55	100	12	4											114,30	12100			136,50	12100
12	16	28	73	12	4	90,15	12000			117,60	12000										
16	20	52	100	16	4											157,60	16100			195,30	16100
16	20	34	82	16	4	139,60	16000			176,50	16000										

Steel				
Stainless steel	●	●	●	●
Cast iron				
Non ferrous metals				
Heat resistant alloys	●	●	●	●
hardened materials				

→ v_c/f_z Page 260+261

MonsterMill – Torus face milling cutter

▲ r_{3D} = programmed corner radius
▲ APMX does not correspond to the maximum cutting depth

TCR | λ_s=15° γ_s=10° | ZEFP | HPC

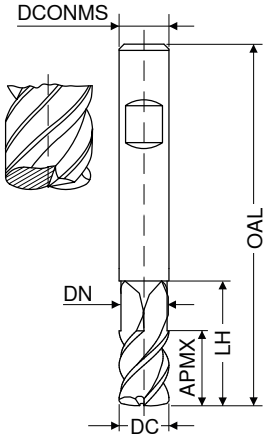

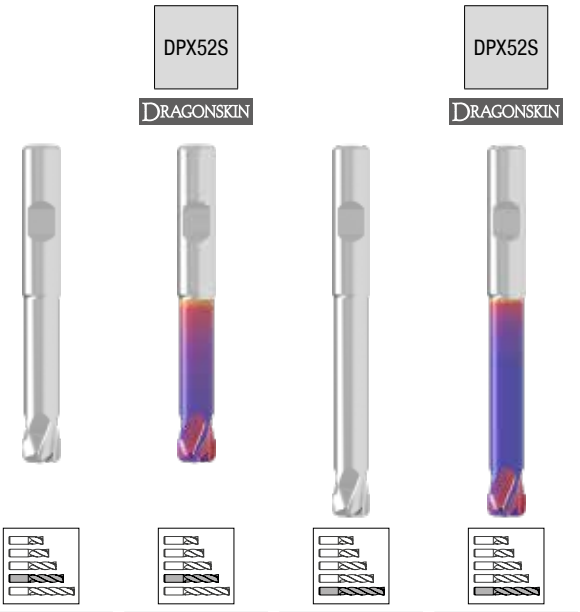

DIN 6527 | HB | NEW V1 | Article no. 52 511 ... | EUR

DIN 6527 | HB | NEW V1 | Article no. 52 512 ... | EUR

DIN 6527 | HB | NEW V1 | Article no. 52 511 ... | EUR

DIN 6527 | HB | NEW V1 | Article no. 52 512 ... | EUR

DC_{e8} mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	$DCONMS_{h5}$ mm	ZEFP	EUR	Article no. 52 511 ...	EUR	Article no. 52 512 ...	EUR	Article no. 52 511 ...	EUR	Article no. 52 512 ...
2	0,3	1,5	1,7	13	18	54	6	2	51,95	02000	58,82	02000				
2	0,3	1,5	1,7	18	39	75	6	2					55,53	02100	62,40	02100
3	0,3	1,5	2,7	15	18	54	6	2	51,95	03000	58,82	03000				
3	0,3	1,5	2,7	20	39	75	6	2					55,53	03100	62,40	03100
4	0,5	2,5	3,6	16	22	58	6	2	51,95	04000	58,82	04000				
4	0,5	2,5	3,6	24	49	85	6	2					58,30	04100	65,18	04100
5	0,5	3,5	4,6	18	29	65	6	4	56,27	05000	63,15	05000				
5	0,5	3,5	4,6	28	64	100	6	4					66,20	05100	73,07	05100
6	1,0	3,5	5,2	20	29	65	6	4	56,27	06000	63,15	06000				
6	1,0	3,5	5,2	28	64	100	6	4					66,20	06100	73,07	06100
8	1,5	4,8	7,0	24	34	70	8	5	65,95	08000	75,63	08000				
8	1,5	4,8	7,0	40	64	100	8	5					86,07	08100	95,72	08100
10	2,0	5,8	9,0	26	45	85	10	5	89,38	10000	101,40	10000				
10	2,0	5,8	9,0	48	60	100	10	5					121,70	10100	133,70	10100
12	2,0	6,8	11,0	30	48	93	12	5	121,70	12000	135,20	12000				
12	2,0	6,8	11,0	56	75	120	12	5					157,60	12100	171,10	12100
16	2,5	8,8	14,5	35	52	100	16	5	145,60	16000	162,20	16000				
16	2,5	8,8	14,5	65	102	150	16	5					191,80	16100	208,30	16100

Steel				
Stainless steel	●	●	●	●
Cast iron				
Non ferrous metals				
Heat resistant alloys	●	●	●	●
hardened materials				

→ v_c/f_z Page 260+261

14

MonsterMill – Finish milling cutter with corner radius

- Radius accuracy +/- 0.01 mm
- T_x = maximum depth of cut
- DC Tolerance
  up to Ø 6 mm: 0 / -0.01 mm
  from Ø 6 mm: 0 / -0.02 mm

HCR | λ_s=30° γ_s=–3° | ZEFP | 54–70 HRC

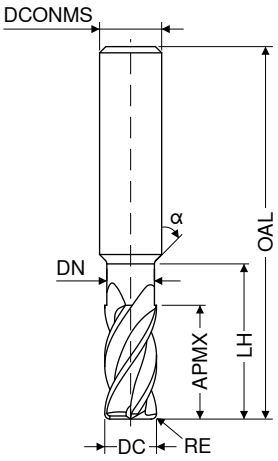

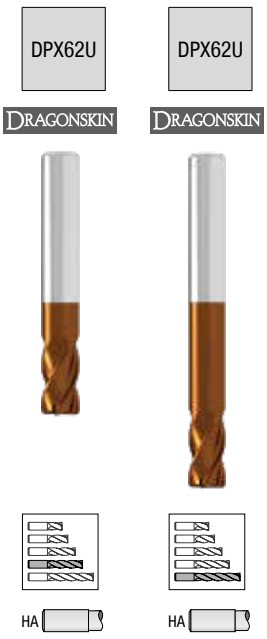

DC	RE	APMX	DN	LH	α°	OAL	DCONMS $_{h5}$	T_x	ZEFP	NEW V1 Article no. 53 603 ...		NEW V1 Article no. 53 604 ...	
mm	mm	mm	mm	mm		mm	mm			EUR		EUR	
0,2	0,05	0,5		0,5	30	48	4	2,5 x DC	2	51,26	**30205**		
0,2	0,05	0,5	0,18	1,0	30	48	4	5 x DC	2	51,26	**40205**		
0,3	0,05	0,6	0,27	1,0	30	48	4	3,3 x DC	2	48,58	**30305**		
0,3	0,05	0,6	0,27	2,0	30	48	4	6,7 x DC	2	48,58	**40305**		
0,4	0,05	0,7	0,35	1,0	30	48	4	2,5 x DC	2	48,58	**30405**		
0,4	0,05	0,7	0,35	2,0	30	48	4	5 x DC	2	48,58	**40405**		
0,4	0,05	0,7	0,35	3,0	30	48	4	7,5 x DC	2	48,58	**50405**		
0,5	0,05	0,7	0,45	1,0	30	48	4	2 x DC	2	47,20	**30505**		
0,5	0,05	0,7	0,45	2,0	30	48	4	4 x DC	2	47,20	**40505**		
0,5	0,05	0,7	0,45	2,5	30	48	4	5 x DC	2	47,20	**50505**		
0,5	0,05	0,7	0,45	3,0	30	48	4	6 x DC	2	47,20	**60505**		
0,5	0,05	0,7	0,45	4,0	30	48	4	8 x DC	2	47,20	**70505**		
0,6	0,05	0,8	0,55	2,0	30	48	4	3,3 x DC	2	45,92	**30605**		
0,6	0,05	0,8	0,55	3,0	30	48	4	5 x DC	2	45,92	**40605**		
0,6	0,05	0,8	0,55	4,5	30	48	4	7,5 x DC	2	45,92	**50605**		
0,6	0,05	0,8	0,55	6,0	30	48	4	10 x DC	2			45,92	**30605**
0,8	0,05	1,0	0,75	2,0	30	48	4	2,5 x DC	2	45,92	**30805**		
0,8	0,05	1,0	0,75	4,0	30	48	4	5 x DC	2	45,92	**40805**		
0,8	0,05	1,0	0,75	6,0	30	48	4	7,5 x DC	2	45,92	**50805**		
0,8	0,05	1,0	0,75	8,0	30	48	4	10 x DC	2			47,36	**30805**
0,8	0,05	1,0	0,75	10,0	30	48	4	12,5 x DC	2			47,36	**40805**
1,0	0,10	1,5	0,95	2,0	30	48	4	2 x DC	4	51,98	**31001**		
1,0	0,10	1,5	0,95	4,0	30	48	4	4 x DC	4	53,08	**41001**		
1,0	0,10	1,5	0,95	6,0	30	48	4	6 x DC	4	53,08	**51001**		
1,0	0,10	1,5	0,95	8,0	30	48	4	8 x DC	4	54,42	**61001**		
1,0	0,10	1,5	0,95	10,0	30	48	4	10 x DC	4			54,42	**31001**
1,0	0,10	1,5	0,95	14,0	30	48	4	14 x DC	4			54,42	**41001**
1,5	0,10	2,0	1,45	4,0	30	48	4	2,7 x DC	4	52,80	**31501**		
1,5	0,10	2,0	1,45	6,0	30	48	4	4 x DC	4	54,00	**41501**		
1,5	0,10	2,0	1,45	10,0	30	48	4	6,7 x DC	4	54,00	**51501**		
1,5	0,10	2,0	1,45	12,0	30	48	4	8 x DC	4	55,18	**61501**		
1,5	0,10	2,0	1,45	15,0	30	60	4	10 x DC	4			55,86	**31501**
1,5	0,10	2,0	1,45	20,0	30	60	4	13,3 x DC	4			57,22	**41501**
2,0	0,20	2,5	1,90	4,0	30	48	4	2 x DC	4	52,80	**32002**		
2,0	0,20	2,5	1,90	6,0	30	48	4	3 x DC	4	54,00	**42002**		
2,0	0,20	2,5	1,90	8,0	30	48	4	4 x DC	4	54,00	**52002**		
2,0	0,20	2,5	1,90	10,0	30	48	4	5 x DC	4	54,00	**62002**		
2,0	0,20	2,5	1,90	12,0	30	48	4	6 x DC	4	55,18	**72002**		
2,0	0,20	2,5	1,90	16,0	30	60	4	8 x DC	4	55,86	**82002**		
2,0	0,20	2,5	1,90	20,0	30	60	4	10 x DC	4			57,22	**32002**
2,0	0,20	2,5	1,90	25,0	30	60	4	12,5 x DC	4			57,22	**42002**
3,0	0,20	3,5	2,90	8,0	30	60	6	2,7 x DC	4	60,32	**33002**		

Steel	○	○
hardened < 45 HRC	○	○
hardened 46–55 HRC	○	○
hardened 56–60 HRC	●	●
hardened 61–65 HRC	●	●
hardened 65–70 HRC	●	●

→ v_c/f_z Page 264–269

Continued on next page

MonsterMill – Finish milling cutter with corner radius

- Radius accuracy +/- 0.01 mm
- T_x = maximum depth of cut
- DC Tolerance
  up to Ø 6 mm: 0 / -0.01 mm
  from Ø 6 mm: 0 / -0.02 mm

HCR | λ_s=30° γ_s=–3° | ZEFP | 54–70 HRC

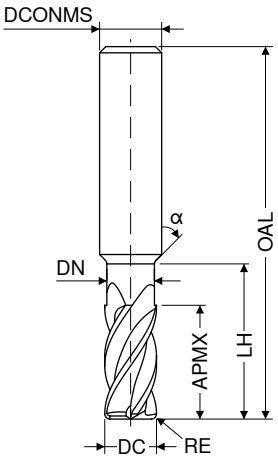

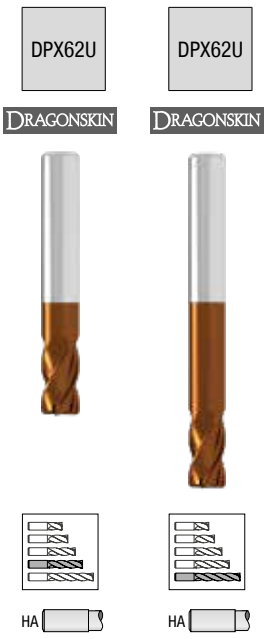

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	NEW V1 Article no. 53 603 ... EUR		NEW V1 Article no. 53 604 ... EUR	
3,0	0,20	3,5	2,90	12,0	30	60	6	4 x DC	4	61,64	**43002**		
3,0	0,20	3,5	2,90	16,0	30	60	6	5,3 x DC	4	61,64	**53002**		
3,0	0,20	3,5	2,90	20,0	30	70	6	6,7 x DC	4	62,76	**63002**		
3,0	0,20	3,5	2,90	24,0	30	70	6	8 x DC	4	64,22	**73002**		
4,0	0,20	4,5	3,90	8,0	30	60	6	2 x DC	4	62,88	**34002**		
4,0	0,20	4,5	3,90	12,0	30	60	6	3 x DC	4	64,30	**44002**		
4,0	0,20	4,5	3,90	16,0	30	60	6	4 x DC	4	64,30	**54002**		
4,0	0,20	4,5	3,90	20,0	30	70	6	5 x DC	4	65,44	**64002**		
4,0	0,20	4,5	3,90	24,0	30	70	6	6 x DC	4	66,86	**74002**		
4,0	0,20	4,5	3,90	28,0	30	70	6	7 x DC	4	66,86	**84002**		
4,0	0,50	4,5	3,90	8,0	30	60	6	2 x DC	4	62,88	**34005**		
4,0	0,50	4,5	3,90	12,0	30	60	6	3 x DC	4	64,30	**44005**		
4,0	0,50	4,5	3,90	16,0	30	60	6	4 x DC	4	64,30	**54005**		
4,0	0,50	4,5	3,90	20,0	30	70	6	5 x DC	4	65,44	**64005**		
4,0	0,50	4,5	3,90	24,0	30	70	6	6 x DC	4	66,86	**74005**		
4,0	0,50	4,5	3,90	28,0	30	70	6	7 x DC	4	66,86	**84005**		
4,0	1,00	4,5	3,90	8,0	30	60	6	2 x DC	4	62,88	**34010**		
4,0	1,00	4,5	3,90	12,0	30	60	6	3 x DC	4	64,30	**44010**		
4,0	1,00	4,5	3,90	16,0	30	60	6	4 x DC	4	64,30	**54010**		
4,0	1,00	4,5	3,90	20,0	30	70	6	5 x DC	4	65,44	**64010**		
4,0	1,00	4,5	3,90	24,0	30	70	6	6 x DC	4	66,86	**74010**		
4,0	1,00	4,5	3,90	28,0	30	70	6	7 x DC	4	66,86	**84010**		
6,0	0,20	6,5	5,90	12,0		60	6	2 x DC	4	66,36	**36002**		
6,0	0,20	6,5	5,90	16,0		60	6	2,7 x DC	4	68,48	**46002**		
6,0	0,20	6,5	5,90	20,0		60	6	3,3 x DC	4	68,48	**56002**		
6,0	0,50	6,5	5,90	12,0		60	6	2 x DC	4	66,36	**36005**		
6,0	0,50	6,5	5,90	16,0		60	6	2,7 x DC	4	68,48	**46005**		
6,0	0,50	6,5	5,90	20,0		60	6	3,3 x DC	4	68,48	**56005**		
6,0	1,00	6,5	5,90	12,0		60	6	2 x DC	4	66,36	**36010**		
6,0	1,00	6,5	5,90	16,0		60	6	2,7 x DC	4	68,48	**46010**		
6,0	1,00	6,5	5,90	20,0		60	6	3,3 x DC	4	68,48	**56010**		
8,0	0,50	8,5	7,90	16,0		60	8	2 x DC	4	84,00	**38005**		
8,0	0,50	8,5	7,90	40,0		80	8	5 x DC	4	89,20	**48005**		
8,0	1,00	8,5	7,90	16,0		60	8	2 x DC	4	84,00	**38010**		
8,0	1,00	8,5	7,90	40,0		80	8	5 x DC	4	89,20	**48010**		
10,0	0,50	10,5	9,90	20,0		70	10	2 x DC	4	105,30	**10005**		
10,0	0,50	10,5	9,90	40,0		90	10	4 x DC	4	112,40	**10105**		
10,0	1,00	10,5	9,90	20,0		70	10	2 x DC	4	105,30	**10010**		
10,0	1,00	10,5	9,90	40,0		90	10	4 x DC	4	112,40	**10110**		
12,0	1,00	12,5	11,90	24,0		70	12	2 x DC	4	136,20	**12010**		
12,0	1,00	12,5	11,90	40,0		90	12	3,3 x DC	4	145,90	**12110**		

Steel	○	○
hardened < 45 HRC	○	○
hardened 46–55 HRC	○	○
hardened 56–60 HRC	●	●
hardened 61–65 HRC	●	●
hardened 65–70 HRC	●	●

→ v_c/f_z Page 264–269

14

MonsterMill – Finish milling cutter with corner radius

- Radius accuracy +/- 0.02 mm
- T_x = maximum depth of cut
- DC Tolerance
  up to Ø 6 mm: 0 / -0.01 mm
  from Ø 6 mm: 0 / -0.02 mm

HCR | λ_s = 50° γ_s = -15° | ZEFP | 54–70 HRC

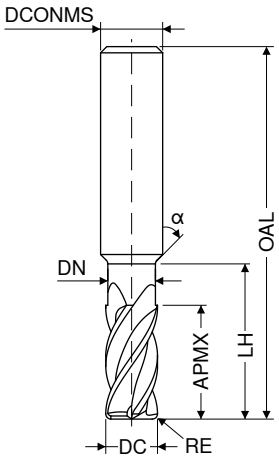

Factory standard

Factory standard

HA

HA

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	NEW V1 Article no. 53 605 ... EUR		NEW V1 Article no. 53 606 ... EUR	
1	0,03	2			30	48	4	2 x DC	4	55,36	410		
1	0,03	3	0,95	4	30	48	4	3 x DC	4			66,84	410
2	0,03	6	1,90	8	30	48	4	3 x DC	4			67,74	420
2	0,03	4			30	48	4	2 x DC	4	56,28	420		
3	0,03	6			30	60	6	2 x DC	4	65,18	030		
3	0,03	9	2,90	12	30	60	6	3 x DC	4			77,82	030
4	0,05	8			30	60	6	2 x DC	4	68,68	040		
4	0,05	12	3,90	16	30	60	6	3 x DC	4			79,68	040
6	0,05	12				60	6	2 x DC	4	65,92	060		
6	0,05	18	5,90	24		60	6	3 x DC	4			77,82	060
8	0,05	16				60	8	2 x DC	4	96,16	080		
8	0,05	24	7,90	32		70	8	3 x DC	4			109,90	080
10	0,05	20				70	10	2 x DC	4	116,40	100		
10	0,05	30	9,90	40		80	10	3 x DC	4			132,80	100
12	0,05	24				70	12	2 x DC	4	131,90	120		
12	0,05	36	11,90	44		90	12	3 x DC	4			152,10	120

Steel	○	○
hardened < 45 HRC	○	○
hardened 46–55 HRC	○	○
hardened 56–60 HRC	●	●
hardened 61–65 HRC	●	●
hardened 65–70 HRC	●	●

→ v_c/f_z Page 270

MonsterMill – Ball Nosed Cutter

- Radius accuracy: ±0.01 mm
- T_x = maximum depth of cut
- DC Tolerance
  up to Ø 6 mm: 0 / -0.01 mm
  from Ø 6 mm: 0 / -0.02 mm

HCR | λ_s=30° γ_s=–3° | ZEFP | 54–70 HRC

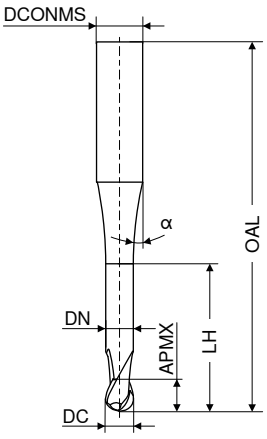

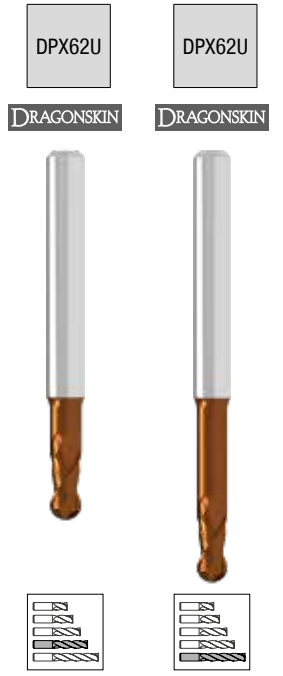

Factory standard | Factory standard

HA | HA

DC	APMX	DN	LH	α°	OAL	DCONMS $_{h5}$	T_x	ZEFP	NEW V1 Article no. 53 600 ...		NEW V1 Article no. 53 601 ...	
mm	mm	mm	mm		mm	mm			EUR		EUR	
0,2	0,5		0,5	30	48	4	2,5 x DC	2	51,26	**302**		
0,2	0,5	0,18	1,0	30	48	4	5 x DC	2	51,26	**402**		
0,3	0,5	0,27	1,0	30	48	4	3,3 x DC	2	48,58	**303**		
0,3	0,5	0,27	2,0	30	48	4	6,7 x DC	2	48,58	**403**		
0,4	0,5	0,35	1,0	30	48	4	2,5 x DC	2	48,58	**304**		
0,4	0,5	0,35	2,0	30	48	4	5 x DC	2	48,58	**404**		
0,4	0,5	0,35	3,0	30	48	4	7,5 x DC	2	48,58	**504**		
0,5	0,5	0,45	1,0	30	48	4	2 x DC	2	47,20	**305**		
0,5	0,5	0,45	2,0	30	48	4	4 x DC	2	47,20	**405**		
0,5	0,5	0,45	2,5	30	48	4	5 x DC	2	47,20	**505**		
0,5	0,5	0,45	3,0	30	48	4	6 x DC	2	47,20	**605**		
0,5	0,5	0,45	4,0	30	48	4	8 x DC	2	47,20	**705**		
0,6	0,6	0,55	2,0	30	48	4	3,3 x DC	2	47,20	**306**		
0,6	0,6	0,55	3,0	30	48	4	5 x DC	2	47,20	**406**		
0,6	0,6	0,55	4,5	30	48	4	7,5 x DC	2	47,20	**506**		
0,6	0,6	0,55	6,0	30	48	4	10 x DC	2			47,20	**306**
0,8	1,0	0,75	2,0	30	48	4	2,5 x DC	2	45,92	**308**		
0,8	1,0	0,75	4,0	30	48	4	5 x DC	2	45,92	**408**		
0,8	1,0	0,75	6,0	30	48	4	7,5 x DC	2	45,92	**508**		
0,8	1,0	0,75	8,0	30	48	4	10 x DC	2			45,92	**308**
0,8	1,0	0,75	10,0	30	48	4	12,5 x DC	2			45,92	**408**
1,0	1,5	0,95	2,0	30	48	4	2 x DC	2	44,38	**310**		
1,0	1,5	0,95	4,0	30	48	4	4 x DC	2	44,38	**410**		
1,0	1,5	0,95	6,0	30	48	4	6 x DC	2	44,38	**510**		
1,0	1,5	0,95	8,0	30	48	4	8 x DC	2	44,38	**610**		
1,0	1,5	0,95	10,0	30	48	4	10 x DC	2			44,38	**310**
1,0	1,5	0,95	14,0	30	48	4	14 x DC	2			45,76	**410**
1,5	1,5	1,45	4,0	30	48	4	2,7 x DC	2	45,10	**315**		
1,5	1,5	1,45	6,0	30	48	4	4 x DC	2	45,10	**415**		
1,5	1,5	1,45	8,0	30	48	4	5,3 x DC	2	45,10	**515**		
1,5	1,5	1,45	10,0	30	48	4	6,7 x DC	2	45,10	**615**		
1,5	1,5	1,45	15,0	30	60	4	10 x DC	2			45,92	**315**
1,5	1,5	1,45	20,0	30	60	4	13,3 x DC	2			46,56	**415**
2,0	2,5	1,90	4,0	30	48	4	2 x DC	2	45,10	**320**		

Steel	○	○
hardened < 45 HRC	○	○
hardened 46–55 HRC	○	○
hardened 56–60 HRC	●	●
hardened 61–65 HRC	●	●
hardened 65–70 HRC	●	●

→ v_c/f_z Page 262+263

14

Continued on next page

MonsterMill – Ball Nosed Cutter

- Radius accuracy: ±0.01 mm
- T_x = maximum depth of cut
- DC Tolerance
  up to Ø 6 mm: 0 / -0.01 mm
  from Ø 6 mm: 0 / -0.02 mm

HCR | λ_s=30° γ_s=–3° | ZEFP | 54–70 HRC

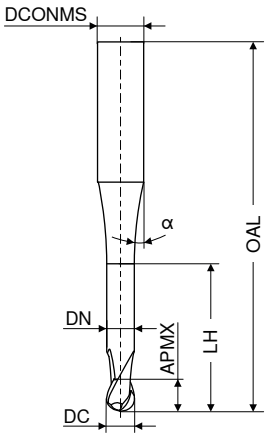

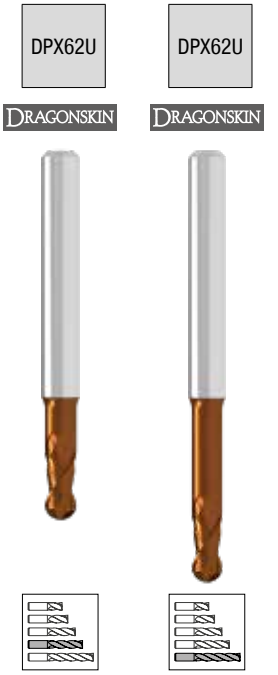

Factory standard | Factory standard

HA | HA

DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	NEW V1 Article no. 53 600 ... EUR		NEW V1 Article no. 53 601 ... EUR	
2,0	2,5	1,90	6,0	30	48	4	3 x DC	2	45,10	**420**		
2,0	2,5	1,90	8,0	30	48	4	4 x DC	2	45,10	**520**		
2,0	2,5	1,90	10,0	30	48	4	5 x DC	2	45,92	**620**		
2,0	2,5	1,90	12,0	30	48	4	6 x DC	2	45,92	**720**		
2,0	2,5	1,90	16,0	30	60	4	8 x DC	2	46,66	**820**		
2,0	2,5	1,90	20,0	30	60	4	10 x DC	2			48,14	**320**
2,0	2,5	1,90	25,0	30	60	4	12,5 x DC	2			48,14	**420**
3,0	3,5	2,90	8,0	30	60	6	2,7 x DC	2	48,58	**330**		
3,0	3,5	2,90	12,0	30	60	6	4 x DC	2	48,58	**430**		
3,0	3,5	2,90	16,0	30	60	6	5,3 x DC	2	48,58	**530**		
3,0	3,5	2,90	20,0	30	70	6	6,7 x DC	2	49,70	**630**		
3,0	3,5	2,90	24,0	30	70	6	8 x DC	2	51,14	**730**		
4,0	4,5	3,90	8,0	30	60	6	2 x DC	2	48,58	**340**		
4,0	4,5	3,90	12,0	30	60	6	3 x DC	2	48,58	**440**		
4,0	4,5	3,90	16,0	30	60	6	4 x DC	2	48,58	**540**		
4,0	4,5	3,90	20,0	30	70	6	5 x DC	2	49,70	**640**		
4,0	4,5	3,90	24,0	30	70	6	6 x DC	2	51,14	**740**		
4,0	4,5	3,90	28,0	30	70	6	7 x DC	2	51,14	**840**		
6,0	6,5	5,90	12,0		60	6	2 x DC	2	48,58	**360**		
6,0	6,5	5,90	16,0		60	6	2,7 x DC	2	48,58	**460**		
6,0	6,5	5,90	20,0		60	6	3,3 x DC	2	48,58	**560**		
8,0	8,5	7,90	16,0		60	8	2 x DC	2	72,32	**380**		
8,0	8,5	7,90	40,0		80	8	5 x DC	2	77,54	**480**		
10,0	10,5	9,90	20,0	30	70	10	2 x DC	2	85,34	**100**		
10,0	10,5	9,90	40,0		90	10	4 x DC	2	92,52	**101**		
12,0	12,5	11,90	24,0		75	12	2 x DC	2	113,50	**120**		
12,0	12,5	11,90	40,0		90	12	3,3 x DC	2	121,20	**121**		

Steel	○	○
hardened < 45 HRC	○	○
hardened 46–55 HRC	○	○
hardened 56–60 HRC	●	●
hardened 61–65 HRC	●	●
hardened 65–70 HRC	●	●

→ v_c/f_z Page 262+263

MonsterMill – Ball Nosed Cutter

- Radius accuracy: ±0.01 mm
- T_x = maximum depth of cut
- DC Tolerance
  up to Ø 6 mm: 0 / -0.01 mm
  from Ø 6 mm: 0 / -0.02 mm

HCR | λ_s=30° γ_s=–3° | ZEFP | 54–70 HRC

DPX62U

DRAGONSKIN

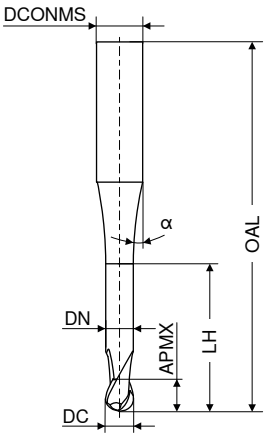

Factory standard

HA

NEW V1

DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	Article no. 53 602 ...	
									EUR	
3	3,5	2,9	8	30	60	6	2,7 x DC	4	55,54	330
3	3,5	2,9	12	30	60	6	4 x DC	4	55,54	430
3	3,5	2,9	16	30	60	6	5,3 x DC	4	55,54	530
3	3,5	2,9	20	30	70	6	6,7 x DC	4	56,68	630
3	3,5	2,9	24	30	70	6	8 x DC	4	58,08	730
4	4,5	3,9	8	30	60	6	2 x DC	4	57,02	340
4	4,5	3,9	12	30	60	6	3 x DC	4	58,04	440
4	4,5	3,9	16	30	60	6	4 x DC	4	58,04	540
4	4,5	3,9	20	30	70	6	5 x DC	4	59,16	640
4	4,5	3,9	24	30	70	6	6 x DC	4	60,58	740
4	4,5	3,9	28	30	70	6	7 x DC	4	60,58	840
6	6,5	5,9	12		60	6	2 x DC	4	60,50	360
6	6,5	5,9	16		60	6	2,7 x DC	4	62,62	460
6	6,5	5,9	20		60	6	3,3 x DC	4	62,62	560
8	8,5	7,9	16		60	8	2 x DC	4	79,68	380
8	8,5	7,9	40		80	8	5 x DC	4	84,86	480
10	10,5	9,9	20		70	10	2 x DC	4	94,34	100
10	10,5	9,9	40		90	10	4 x DC	4	101,60	101
12	12,5	11,9	24		75	12	2 x DC	4	124,20	120
12	12,5	11,9	40		90	12	3,3 x DC	4	131,90	121

Steel	○
hardened < 45 HRC	○
hardened 46–55 HRC	○
hardened 56–60 HRC	●
hardened 61–65 HRC	●
hardened 65–70 HRC	●

→ v_c/f_z Page 271

14

MonsterMill – Plunge milling cutter with corner radius

PCR
UNI

λ_s=36°
λ_s=38°
γ_s= 8°

ZEFP

HPC



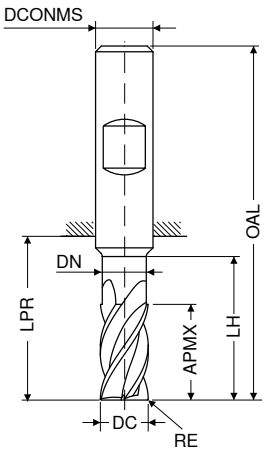

DIN 6527

HB

V1

DIN 6527

HB

V1

DIN 6527

HB

V1

DC f8	RE ±0,03	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 613 ...		Article no. 52 614 ...		Article no. 52 615 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
5,7	0,20	10			18	54	6	4	44,19	057				
5,7	0,20	13	5,5	19	21	57	6	4			44,42	057		
5,7	0,20	13	5,5	24	26	62	6	4					51,25	057
6,0	0,20	10			18	54	6	4	44,19	060				
6,0	0,20	13	5,8	19	21	57	6	4			46,29	060		
6,0	0,20	13	5,8	24	26	62	6	4					52,77	060
6,7	0,20	11			22	58	8	4	53,01	067				
6,7	0,20	16	6,5	25	27	63	8	4			52,46	067		
6,7	0,20	16	6,4	30	32	68	8	4					69,95	067
7,0	0,20	11			22	58	8	4	53,01	070				
7,0	0,20	16	6,8	25	27	63	8	4			52,46	070		
7,0	0,20	16	6,7	30	32	68	8	4					69,95	070
7,7	0,20	12			22	58	8	4	53,01	077				
7,7	0,20	19	7,5	25	27	63	8	4			54,01	077		
7,7	0,20	21	7,4	30	32	68	8	4					69,95	077
8,0	0,20	12			22	58	8	4	53,01	080				
8,0	0,20	19	7,8	25	27	63	8	4			55,88	080		
8,0	0,20	21	7,7	30	32	68	8	4					73,08	080
8,7	0,32	13			26	66	10	4	68,89	087				
8,7	0,32	19	8,5	30	32	72	10	4			78,47	087		
8,7	0,32	22	8,4	38	40	80	10	4					87,38	087
9,0	0,32	13			26	66	10	4	68,89	090				
9,0	0,32	19	8,8	30	32	72	10	4			78,47	090		
9,0	0,32	22	8,7	38	40	80	10	4					87,38	090
9,7	0,32	14			26	66	10	4	68,89	097				
9,7	0,32	22	9,5	30	32	72	10	4			78,47	097		
9,7	0,32	22	9,4	38	40	80	10	4					87,38	097
10,0	0,32	14			26	66	10	4	68,89	100				
10,0	0,32	22	9,8	30	32	72	10	4			74,62	100		
10,0	0,32	22	9,7	38	40	80	10	4					83,22	100
11,7	0,32	16			28	73	12	4	89,94	117				
11,7	0,32	26	11,5	36	38	83	12	4			100,50	117		
11,7	0,32	26	11,3	46	48	93	12	4					119,40	117
12,0	0,32	16			28	73	12	4	89,94	120				
12,0	0,32	26	11,8	36	38	83	12	4			95,89	120		
12,0	0,32	26	11,6	46	48	93	12	4					113,70	120
13,7	0,32	18			30	75	14	4	113,60	137				
13,7	0,32	26	13,5	36	38	83	14	4			119,10	137		
13,7	0,32	26	13,3	52	54	99	14	4					144,00	137
14,0	0,32	18			30	75	14	4	113,60	140				
14,0	0,32	26	13,8	36	38	83	14	4			123,50	140		

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals			
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 272+273

Continued on next page

MonsterMill – Plunge milling cutter with corner radius

PCR UNI | λ_s=36° 38° γ_s= 8° | ZEFP | HPC

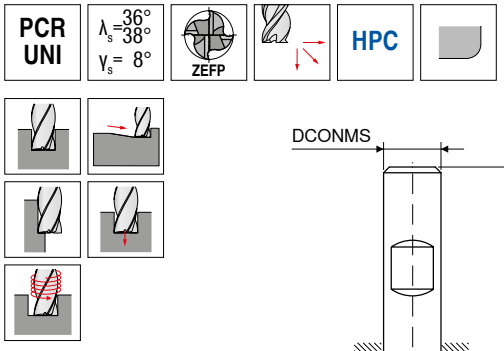

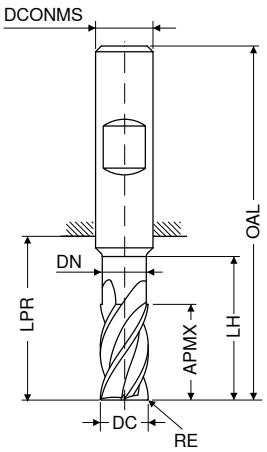

DIN 6527 | DIN 6527 | DIN 6527

HB | HB | HB

V1 | V1 | V1

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 613 ... EUR		Article no. 52 614 ... EUR		Article no. 52 615 ... EUR	
14,0	0,32	26	13,6	52	54	99	14	4					140,40	**140**
15,5	0,32	22			34	82	16	4	144,40	**155**				
15,5	0,32	32	15,3	42	44	92	16	4			162,00	**155**		
15,5	0,32	36	15,0	58	60	108	16	4					200,90	**155**
16,0	0,32	22			34	82	16	4	144,40	**160**				
16,0	0,32	32	15,8	42	44	92	16	4			167,50	**160**		
16,0	0,32	36	15,5	58	60	108	16	4					196,40	**160**
17,5	0,32	24			36	84	18	4	172,00	**175**				
17,5	0,32	32	17,3	42	44	92	18	4			189,60	**175**		
17,5	0,32	36	17,0	67	69	117	18	4					226,00	**175**
18,0	0,32	24			36	84	18	4	172,00	**180**				
18,0	0,32	32	17,8	42	44	92	18	4			195,10	**180**		
18,0	0,32	36	17,5	67	69	117	18	4					225,50	**180**
19,5	0,50	26			42	92	20	4	212,80	**195**				
19,5	0,50	38	19,3	52	54	104	20	4			255,70	**195**		
19,5	0,50	41	19,0	74	76	126	20	4					331,60	**195**
20,0	0,50	26			42	92	20	4	212,80	**200**				
20,0	0,50	38	19,8	52	54	104	20	4			264,60	**200**		
20,0	0,50	41	19,5	74	76	126	20	4					325,50	**200**

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals			
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 272+273

14

MonsterMill – Plunge milling cutter with corner radius

PCR ALU | λ_s=36° γ_s= 8° | ZEFP | HPC



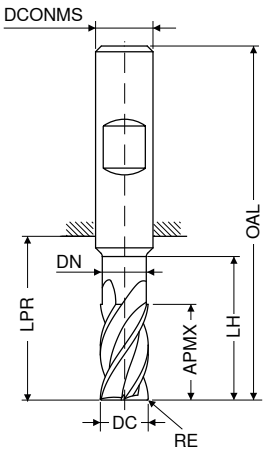

DIN 6527 | HB | V1

DIN 6527 | HB | V1

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP 4	Article no. 52 616 ... EUR		Article no. 52 617 ... EUR	
5,0	0,20	13	4,8	19	21	57	6	4	51,75	050		
5,0	0,20	13	4,8	24	26	62	6	4			57,09	050
5,7	0,20	13	5,5	19	21	57	6	4	51,75	057		
5,7	0,20	13	5,5	24	26	62	6	4			57,09	057
6,0	0,20	13	5,8	19	21	57	6	4	53,30	060		
6,0	0,20	13	5,8	24	26	62	6	4			58,78	060
6,7	0,20	16	6,5	25	27	63	8	4	61,38	067		
6,7	0,20	16	6,4	30	32	68	8	4			76,72	067
7,0	0,20	16	6,8	25	27	63	8	4	61,38	070		
7,0	0,20	16	6,7	30	32	68	8	4			76,72	070
7,7	0,20	19	7,5	25	27	63	8	4	61,38	077		
7,7	0,20	21	7,4	30	32	68	8	4			76,72	077
8,0	0,20	19	7,8	25	27	63	8	4	65,02	080		
8,0	0,20	21	7,7	30	32	68	8	4			80,08	080
8,7	0,32	19	8,5	30	32	72	10	4	85,82	087		
8,7	0,32	22	8,4	38	40	80	10	4			94,39	087
9,0	0,32	19	8,8	30	32	72	10	4	85,82	090		
9,0	0,32	22	8,7	38	40	80	10	4			94,39	090
9,7	0,32	22	9,5	30	32	72	10	4	85,82	097		
9,7	0,32	22	9,4	38	40	80	10	4			94,39	097
10,0	0,32	22	9,8	30	32	72	10	4	83,22	100		
10,0	0,32	22	9,7	38	40	80	10	4			90,75	100
11,7	0,32	26	11,5	36	38	83	12	4	111,30	117		
11,7	0,32	26	11,3	46	48	93	12	4			129,50	117
12,0	0,32	26	11,8	36	38	83	12	4	106,10	120		
12,0	0,32	26	11,6	46	48	93	12	4			124,30	120
13,7	0,32	26	13,5	36	38	83	14	4	132,60	137		
13,7	0,32	26	13,3	52	54	99	14	4			157,80	137
14,0	0,32	26	13,8	36	38	83	14	4	137,30	140		
14,0	0,32	26	13,6	52	54	99	14	4			154,20	140
15,5	0,32	32	15,3	42	44	92	16	4	178,40	155		
15,5	0,32	36	15,0	58	60	108	16	4			217,40	155
16,0	0,32	32	15,8	42	44	92	16	4	183,90	160		
16,0	0,32	36	15,5	58	60	108	16	4			212,80	160
17,5	0,32	32	17,3	42	44	92	18	4	207,50	175		
17,5	0,32	36	17,0	67	69	117	18	4			243,70	175
18,0	0,32	32	17,8	42	44	92	18	4	212,50	180		
18,0	0,32	36	17,5	67	69	117	18	4			243,20	180
19,5	0,50	38	19,3	52	54	104	20	4	278,00	195		
19,5	0,50	41	19,0	74	76	126	20	4			353,70	195
20,0	0,50	38	19,8	52	54	104	20	4	287,40	200		
20,0	0,50	41	19,5	74	76	126	20	4			347,70	200

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 274+275

MonsterMill – Rough milling cutter

▲ Cutting edges with irregular pitch

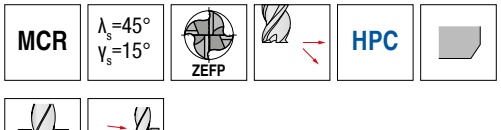



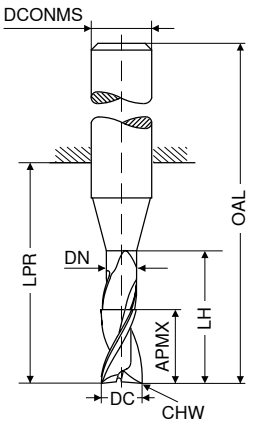



DC h11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	V1 Article no. 52 752 ...		V1 Article no. 52 752 ...		V1 Article no. 52 752 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
1	1,5	0,9	3	10	38	3	0,09	3	113,60	010 [1]				
2	3,0	1,9	8	21	57	6	0,17	3	112,40	020				
3	5,0	2,9	14	21	57	6	0,17	3	126,80	030				
3	8,0	2,9	14	21	57	6	0,17	3			134,50	031		
3	5,0	2,9	19	26	62	6	0,17	3					129,00	032
4	8,0	3,8	18	21	57	6	0,17	3	125,70	040				
4	11,0	3,8	18	21	57	6	0,17	3			133,30	041		
4	8,0	3,8	23	26	62	6	0,17	3					127,80	042
5	9,0	4,8	19	21	57	6	0,17	3	122,30	050				
5	13,0	4,8	19	21	57	6	0,17	3			131,30	051		
5	9,0	4,8	24	26	62	6	0,17	3					125,70	052
6	10,0	5,8	20	21	57	6	0,17	4	120,10	060				
6	13,0	5,8	20	21	57	6	0,17	4			129,00	061		
6	10,0	5,8	25	26	62	6	0,17	4					122,30	062
8	12,0	7,7	25	27	63	8	0,28	4	132,30	080				
8	19,0	7,7	25	27	63	8	0,28	4			157,60	081		
8	12,0	7,7	30	32	68	8	0,28	4					134,50	082
10	15,0	9,5	30	32	72	10	0,28	4	148,80	100				
10	22,0	9,5	30	32	72	10	0,28	4			164,20	101		
10	15,0	9,5	35	40	80	10	0,28	4					154,30	102
12	18,0	11,5	35	38	83	12	0,28	4	183,00	120				
12	26,0	11,5	35	38	83	12	0,28	4			199,50	121		
12	18,0	11,5	45	48	93	12	0,28	4					191,80	122
14	21,0	13,5	35	38	83	14	0,28	4	213,80	140				
14	26,0	13,5	35	38	83	14	0,28	4			222,60	141		
14	21,0	13,5	50	54	99	14	0,28	4					231,50	142
16	24,0	15,5	40	44	92	16	0,43	4	297,50	160				
16	32,0	15,5	40	44	92	16	0,43	4			324,10	161		
16	24,0	15,5	55	60	108	16	0,43	4					322,90	162
20	30,0	19,5	50	54	104	20	0,43	4	397,90	200				
20	38,0	19,5	50	54	104	20	0,43	4			423,30	201		
20	30,0	19,5	70	76	126	20	0,43	4					437,50	202

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals	○	○	○
Heat resistant alloys	○	○	○
hardened materials	○	○	○

1) DIN 6535 HA Shank

→ v_c/f_z Page 276–279

14

CircularLine – End milling cutter

▲ Chip breaker 0.9 x DC

CCR UNI | λ_s=30° 31° | γ_s= 8° | ZEFP | HPC



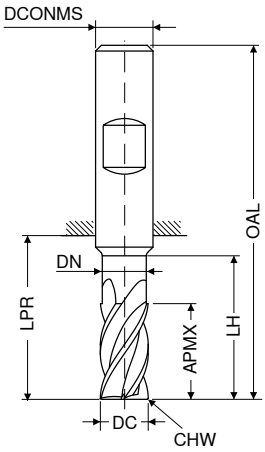

Factory standard | Factory standard

HB | HB

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	V1 Article no. 53 585 ... EUR		V1 Article no. 53 587 ... EUR	
mm	mm	mm	mm	mm	mm	mm	mm					
6	13	5,8	19	21	57	6	0,2	6	46,69	060		
6	19	5,8	25	27	63	6	0,2	6			47,06	060
8	21	7,7	25	27	63	8	0,2	6	60,88	080		
8	25	7,7	33	35	71	8	0,2	6			61,29	080
10	22	9,7	30	32	72	10	0,2	6	78,21	100		
10	31	9,7	41	43	83	10	0,2	6			85,86	100
12	26	11,6	36	38	83	12	0,2	6	100,60	120		
12	37	11,6	47	49	94	12	0,2	6			101,30	120
16	36	15,5	42	44	92	16	0,2	6	200,60	160		
16	49	15,5	61	63	111	16	0,2	6			209,40	160
20	41	19,5	52	54	104	20	0,2	6	288,50	200		
20	61	19,5	75	77	127	20	0,2	6			293,20	200

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals		
Heat resistant alloys	○	○
hardened materials		

→ v_c/f_z Page 280+281

CircularLine – End milling cutter

▲ Chip breaker 0.9 x DC

CCR UNI | λ_s=35° 36° γ_s= 8° | ZEFP | HPC



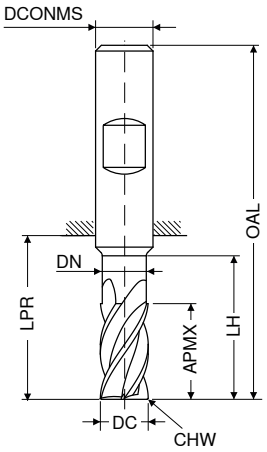

DPX72S

DRAGONSKIN

Factory standard

HB

V1

DC $_{e8}$	APMX	DN	LH	LPR	OAL	DCONMS $_{h6}$	CHW	ZEFP	Article no. 53 589 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR	
6	25	5,8	29	31	67	6	0,2	5	48,71	**060**
8	33	7,7	38	40	76	8	0,2	5	62,93	**080**
10	41	9,7	47	49	89	10	0,2	5	87,52	**100**
12	49	11,6	55	57	102	12	0,2	5	106,60	**120**
16	65	15,5	73	75	123	16	0,2	5	213,80	**160**
20	82	19,5	91	93	143	20	0,2	5	300,90	**200**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 282+283

14

CircularLine – End milling cutter

▲ Chip breaker 0.9 x DC

CCR UNI | λ_s=30° 31° γ_s= 8° | ZEFP | HPC



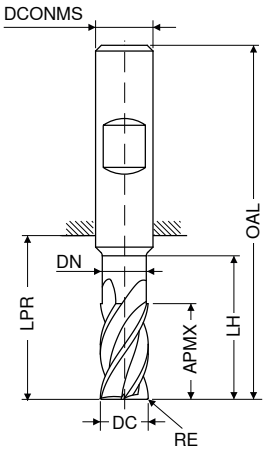

DPX72S

DRAGONSKIN

Factory standard

HB

V1

DC e8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 53 586 ...
mm	mm	mm	mm	mm	mm	mm	mm		EUR
6	0,2	13	5,8	19	21	57	6	6	46,69 06002
6	1,0	13	5,8	19	21	57	6	6	46,94 06010
6	1,5	13	5,8	19	21	57	6	6	46,94 06015
8	0,2	21	7,7	25	27	63	8	6	60,88 08002
8	1,0	21	7,7	25	27	63	8	6	62,34 08010
8	1,5	21	7,7	25	27	63	8	6	62,34 08015
8	2,0	21	7,7	25	27	63	8	6	62,34 08020
10	0,2	22	9,7	30	32	72	10	6	78,21 10002
10	1,0	22	9,7	30	32	72	10	6	80,36 10010
10	1,5	22	9,7	30	32	72	10	6	80,36 10015
10	1,6	22	9,7	30	32	72	10	6	80,36 10016
10	2,0	22	9,7	30	32	72	10	6	80,36 10020
12	0,2	26	11,6	36	38	83	12	6	100,60 12002
12	1,0	26	11,6	36	38	83	12	6	101,10 12010
12	1,5	26	11,6	36	38	83	12	6	101,10 12015
12	1,6	26	11,6	36	38	83	12	6	101,10 12016
12	2,0	26	11,6	36	38	83	12	6	101,10 12020
12	3,0	26	11,6	36	38	83	12	6	101,10 12030
16	0,2	36	15,5	42	44	92	16	6	200,60 16002
16	1,0	36	15,5	42	44	92	16	6	216,30 16010
16	1,5	36	15,5	42	44	92	16	6	209,00 16015
16	1,6	36	15,5	42	44	92	16	6	209,00 16016
16	2,0	36	15,5	42	44	92	16	6	209,00 16020
16	3,0	36	15,5	42	44	92	16	6	209,00 16030
16	4,0	36	15,5	42	44	92	16	6	209,00 16040
20	0,2	41	19,5	52	54	104	20	6	288,50 20002
20	1,0	41	19,5	52	54	104	20	6	291,40 20010
20	1,5	41	19,5	52	54	104	20	6	291,40 20015
20	1,6	41	19,5	52	54	104	20	6	291,40 20016
20	2,0	41	19,5	52	54	104	20	6	291,40 20020
20	3,0	41	19,5	52	54	104	20	6	291,40 20030
20	4,0	41	19,5	52	54	104	20	6	291,40 20040

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 280+281

CircularLine – End milling cutter

▲ Chip breaker 1.8 x DC

CCR UNI | λ_s=30° 31° γ_s= 8° | ZEFP | HPC



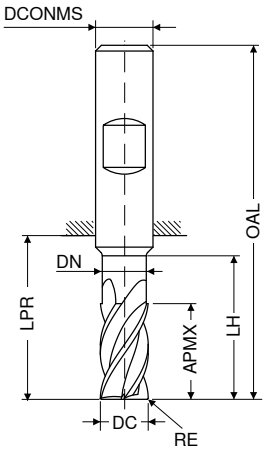

DPX72S

DRAGONSKIN

Factory standard

HB

V1

DC e8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 53 592 ...
mm	mm	mm	mm	mm	mm	mm	mm		EUR
6	0,2	19	5,8	25	27	63	6	6	47,06 06002
6	1,0	19	5,8	25	27	63	6	6	48,50 06010
6	1,5	19	5,8	25	27	63	6	6	48,50 06015
8	0,2	25	7,7	33	35	71	8	6	61,29 08002
8	1,0	25	7,7	33	35	71	8	6	62,93 08010
8	1,5	25	7,7	33	35	71	8	6	62,93 08015
8	2,0	25	7,7	33	35	71	8	6	62,93 08020
10	0,2	31	9,7	41	43	83	10	6	85,86 10002
10	1,0	31	9,7	41	43	83	10	6	87,72 10010
10	1,5	31	9,7	41	43	83	10	6	87,72 10015
10	1,6	31	9,7	41	43	83	10	6	87,72 10016
10	2,0	31	9,7	41	43	83	10	6	87,72 10020
12	0,2	37	11,6	47	49	94	12	6	101,30 12002
12	1,0	37	11,6	47	49	94	12	6	103,90 12010
12	1,5	37	11,6	47	49	94	12	6	103,90 12015
12	1,6	37	11,6	47	49	94	12	6	103,90 12016
12	2,0	37	11,6	47	49	94	12	6	103,90 12020
12	3,0	37	11,6	47	49	94	12	6	103,90 12030
16	0,2	49	15,5	61	63	111	16	6	209,40 16002
16	1,0	49	15,5	61	63	111	16	6	211,60 16010
16	1,5	49	15,5	61	63	111	16	6	211,60 16015
16	1,6	49	15,5	61	63	111	16	6	211,60 16016
16	2,0	49	15,5	61	63	111	16	6	211,60 16020
16	3,0	49	15,5	61	63	111	16	6	211,60 16030
16	4,0	49	15,5	61	63	111	16	6	211,60 16040
20	0,2	61	19,5	75	77	127	20	6	293,20 20002
20	1,0	61	19,5	75	77	127	20	6	296,50 20010
20	1,5	61	19,5	75	77	127	20	6	296,50 20015
20	1,6	61	19,5	75	77	127	20	6	296,50 20016
20	2,0	61	19,5	75	77	127	20	6	296,50 20020
20	3,0	61	19,5	75	77	127	20	6	296,50 20030
20	4,0	61	19,5	75	77	127	20	6	296,50 20040

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 280+281

14

CircularLine – End milling cutter

▲ Chip breaker 0.9 x DC

CCR UNI | λ_s=35° 36° γ_s= 8° | ZEFP | HPC



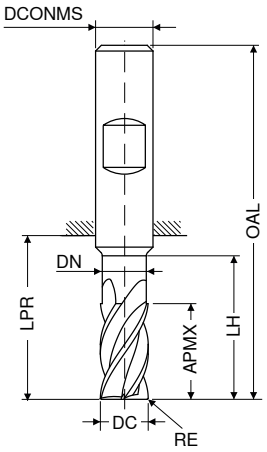

DPX72S

DRAGONSKIN

Factory standard

HB

V1

DC e8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 53 593 ...
mm	mm	mm	mm	mm	mm	mm	mm		EUR
6	0,2	25	5,8	29	31	67	6	5	48,71 06002
6	1,0	25	5,8	29	31	67	6	5	50,14 06010
6	1,5	25	5,8	29	31	67	6	5	50,14 06015
8	0,2	33	7,7	38	40	76	8	5	62,93 08002
8	1,0	33	7,7	38	40	76	8	5	64,58 08010
8	1,5	33	7,7	38	40	76	8	5	64,58 08015
8	2,0	33	7,7	38	40	76	8	5	64,58 08020
10	0,2	41	9,7	47	49	89	10	5	87,52 10002
10	1,0	41	9,7	47	49	89	10	5	89,49 10010
10	1,5	41	9,7	47	49	89	10	5	89,49 10015
10	1,6	41	9,7	47	49	89	10	5	89,49 10016
10	2,0	41	9,7	47	49	89	10	5	89,49 10020
12	0,2	49	11,6	55	57	102	12	5	106,60 12002
12	1,0	49	11,6	55	57	102	12	5	109,20 12010
12	1,5	49	11,6	55	57	102	12	5	109,20 12015
12	1,6	49	11,6	55	57	102	12	5	109,20 12016
12	2,0	49	11,6	55	57	102	12	5	109,20 12020
12	3,0	49	11,6	55	57	102	12	5	109,20 12030
16	0,2	65	15,5	73	75	123	16	5	213,80 16002
16	1,0	65	15,5	73	75	123	16	5	217,10 16010
16	1,5	65	15,5	73	75	123	16	5	217,10 16015
16	1,6	65	15,5	73	75	123	16	5	217,10 16016
16	2,0	65	15,5	73	75	123	16	5	217,10 16020
16	3,0	65	15,5	73	75	123	16	5	217,10 16030
16	4,0	65	15,5	73	75	123	16	5	217,10 16040
20	0,2	82	19,5	91	93	143	20	5	300,90 20002
20	1,0	82	19,5	91	93	143	20	5	305,30 20010
20	1,5	82	19,5	91	93	143	20	5	305,30 20015
20	1,6	82	19,5	91	93	143	20	5	305,30 20016
20	2,0	82	19,5	91	93	143	20	5	305,30 20020
20	3,0	82	19,5	91	93	143	20	5	305,30 20030
20	4,0	82	19,5	91	93	143	20	5	305,30 20040

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 282+283

CircularLine – End milling cutter

▲ Chip breaker 1.8 x DC

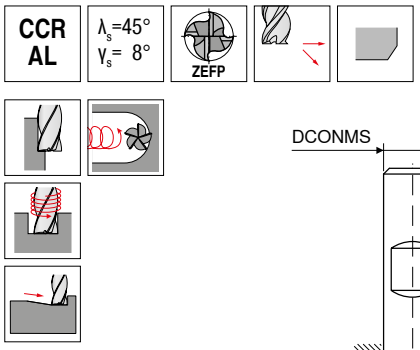

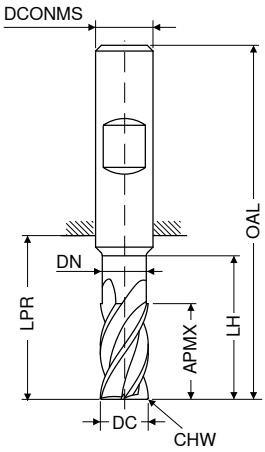

Factory standard

Factory standard

HB

HB

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	V1 Article no. 53 590 ...		V1 Article no. 53 591 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
6	19	5,8	24	30	66	6	0,2	4	49,48	060		
6	25	5,8	30	35	71	6	0,2	4			51,14	060
8	25	7,7	32	37	73	8	0,2	4	64,37	080		
8	33	7,7	40	44	80	8	0,2	4			66,02	080
10	31	9,7	40	49	89	10	0,2	4	89,72	100		
10	41	9,7	50	55	95	10	0,2	4			91,37	100
12	37	11,6	48	56	101	12	0,2	4	107,90	120		
12	49	11,6	60	64	109	12	0,2	4			113,60	120
16	49	15,5	64	72	120	16	0,2	4	221,50	160		
16	65	15,5	80	84	132	16	0,2	4			226,00	160
20	62	19,5	80	84	134	20	0,2	4	310,90	200		
20	82	19,5	100	104	154	20	0,2	4			318,60	200

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 284

14

CircularLine – End milling cutter

▲ Chip breaker 1.8 x DC

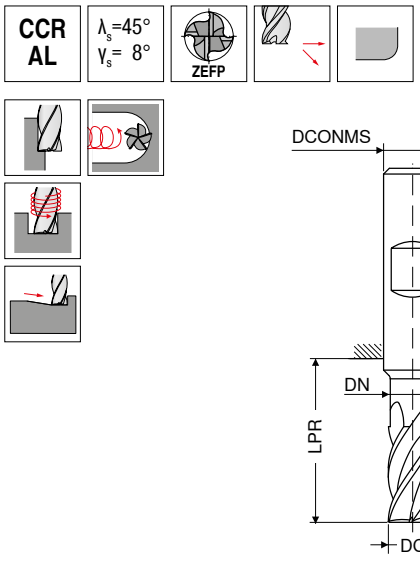

Factory standard

Factory standard

HB

HB

DC e8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1 Article no. 53 594 ... EUR		V1 Article no. 53 595 ... EUR	
mm	mm	mm	mm	mm	mm	mm	mm					
6	0,2	19	5,8	24	30	66	6	4	49,48	06002		
6	1,0	19	5,8	24	30	66	6	4	50,92	06010		
6	1,5	19	5,8	24	30	66	6	4	50,92	06015		
6	0,2	25	5,8	30	35	71	6	4			51,14	06002
6	1,0	25	5,8	30	35	71	6	4			52,57	06010
6	1,5	25	5,8	30	35	71	6	4			52,57	06015
8	0,2	25	7,7	32	37	73	8	4	64,37	08002		
8	1,0	25	7,7	32	37	73	8	4	66,02	08010		
8	1,5	25	7,7	32	37	73	8	4	66,02	08015		
8	2,0	25	7,7	32	37	73	8	4	66,02	08020		
8	0,2	33	7,7	40	44	80	8	4			66,02	08002
8	1,0	33	7,7	40	44	80	8	4			67,79	08010
8	1,5	33	7,7	40	44	80	8	4			67,79	08015
8	2,0	33	7,7	40	44	80	8	4			67,79	08020
10	0,2	31	9,7	40	49	89	10	4	89,72	10002		
10	1,0	31	9,7	40	49	89	10	4	91,59	10010		
10	1,5	31	9,7	40	49	89	10	4	91,59	10015		
10	1,6	31	9,7	40	49	89	10	4	91,59	10016		
10	2,0	31	9,7	40	49	89	10	4	91,59	10020		
10	0,2	41	9,7	50	55	95	10	4			91,37	10002
10	1,0	41	9,7	50	55	95	10	4			93,35	10010
10	1,5	41	9,7	50	55	95	10	4			93,35	10015
10	1,6	41	9,7	50	55	95	10	4			93,35	10016
10	2,0	41	9,7	50	55	95	10	4			93,35	10020
12	0,2	37	11,6	48	56	101	12	4	107,90	12002		
12	1,0	37	11,6	48	56	101	12	4	110,10	12010		
12	1,5	37	11,6	48	56	101	12	4	110,10	12015		
12	1,6	37	11,6	48	56	101	12	4	110,10	12016		
12	2,0	37	11,6	48	56	101	12	4	110,10	12020		
12	3,0	37	11,6	48	56	101	12	4	110,10	12030		
12	0,2	49	11,6	60	64	109	12	4			113,60	12002
12	1,0	49	11,6	60	64	109	12	4			115,80	12010
12	1,5	49	11,6	60	64	109	12	4			115,80	12015
12	1,6	49	11,6	60	64	109	12	4			115,80	12016
12	2,0	49	11,6	60	64	109	12	4			115,80	12020
12	3,0	49	11,6	60	64	109	12	4			115,80	12030
16	0,2	49	15,5	64	72	120	16	4	221,50	16002		
16	1,0	49	15,5	64	72	120	16	4	223,80	16010		
16	1,5	49	15,5	64	72	120	16	4	223,80	16015		

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 284

Continued on next page

CircularLine – End milling cutter

▲ Chip breaker 1.8 x DC

CCR AL | λ_s=45° γ_s= 8° | ZEFP

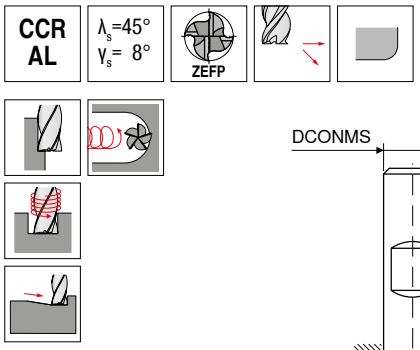

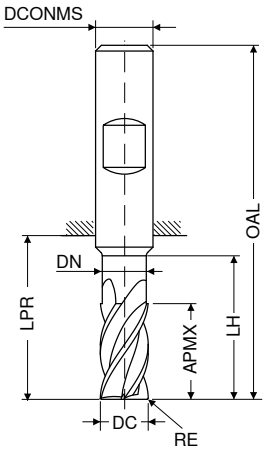

Factory standard | Factory standard

HB | HB

DC e8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1 Article no. 53 594 ...	EUR	V1 Article no. 53 595 ...	EUR
mm	mm	mm	mm	mm	mm	mm	mm					
16	1,6	49	15,5	64	72	120	16	4		223,80 16016		
16	2,0	49	15,5	64	72	120	16	4		223,80 16020		
16	3,0	49	15,5	64	72	120	16	4		223,80 16030		
16	4,0	49	15,5	64	72	120	16	4		223,80 16040		
16	0,2	65	15,5	80	84	132	16	4				226,00 16002
16	1,0	65	15,5	80	84	132	16	4				229,30 16010
16	1,5	65	15,5	80	84	132	16	4				229,30 16015
16	1,6	65	15,5	80	84	132	16	4				229,30 16016
16	2,0	65	15,5	80	84	132	16	4				229,30 16020
16	3,0	65	15,5	80	84	132	16	4				229,30 16030
16	4,0	65	15,5	80	84	132	16	4				229,30 16040
20	0,2	62	19,5	80	84	134	20	4		310,90 20002		
20	1,0	62	19,5	80	84	134	20	4		314,10 20010		
20	1,5	62	19,5	80	84	134	20	4		314,10 20015		
20	1,6	62	19,5	80	84	134	20	4		314,10 20016		
20	2,0	62	19,5	80	84	134	20	4		314,10 20020		
20	3,0	62	19,5	80	84	134	20	4		314,10 20030		
20	4,0	62	19,5	80	84	134	20	4		314,10 20040		
20	0,2	82	19,5	100	104	154	20	4				318,60 20002
20	1,0	82	19,5	100	104	154	20	4				321,90 20010
20	1,5	82	19,5	100	104	154	20	4				321,90 20015
20	1,6	82	19,5	100	104	154	20	4				321,90 20016
20	2,0	82	19,5	100	104	154	20	4				321,90 20020
20	3,0	82	19,5	100	104	154	20	4				321,90 20030
20	4,0	82	19,5	100	104	154	20	4				321,90 20040

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 284

14

CircularLine – End milling cutter with corner radius

▲ Chip breaker 0.9 x DC

CCR Ti | λ_s=40° γ_s=10° | ZEFP | HPC



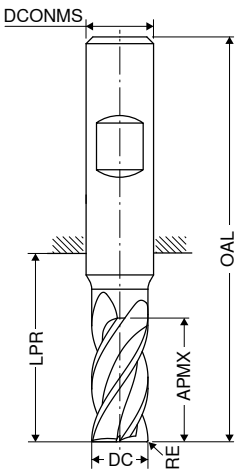

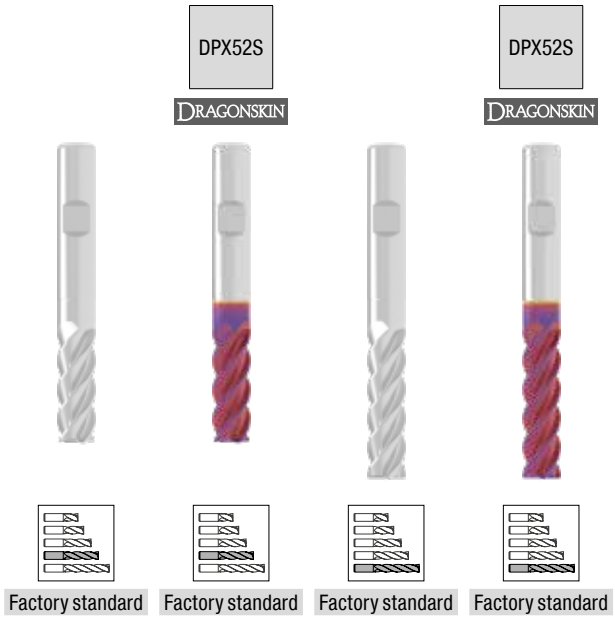

Factory standard | Factory standard | Factory standard | Factory standard

HB | HB | HB | HB

NEW V1 | NEW V1 | NEW V1 | NEW V1

DC e8	RE ±0,01	APMX	LPR	OAL	DCONMS h5	ZEFP	Article no. 52 509 ...		Article no. 52 510 ...		Article no. 52 509 ...		Article no. 52 510 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
6	0,1	18	29	65	6	5	61,37	06000	68,26	06000				
6	0,1	24	31	67	6	5					66,70	06100	73,58	06100
8	0,2	24	34	70	8	5	80,45	08000	90,15	08000				
8	0,2	32	44	80	8	5					83,77	08100	93,45	08100
10	0,2	30	40	80	10	5	100,60	10000	112,50	10000				
10	0,2	40	50	90	10	5					106,50	10100	118,50	10100
12	0,2	36	50	95	12	5	128,90	12000	142,40	12000				
12	0,2	48	55	100	12	5					134,50	12100	148,00	12100
16	0,2	48	62	110	16	5	199,40	16000	215,90	16000				
16	0,3	64	72	120	16	5					212,10	16100	228,70	16100
20	0,3	60	75	125	20	5	263,00	20000	283,40	20000				
20	0,3	80	90	140	20	5					325,10	20100	345,50	20100

Steel				
Stainless steel	○	○	○	○
Cast iron				
Non ferrous metals				
Heat resistant alloys	●	●	●	●
hardened materials				

→ v_c/f_z Page 286+287

CircularLine – End milling cutter

▲ Chip breaker 0.9 x DC



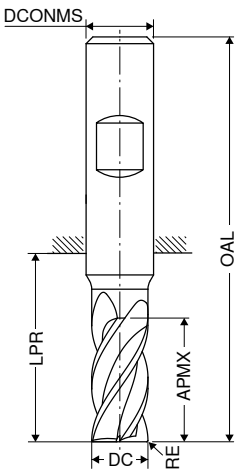

DRAGONSKIN

Factory standard

HB

NEW V1

DC e8	RE ±0,03	APMX	LPR	OAL	DCONMS h6	ZEFP	Article no. 53 596 ...
mm	mm	mm	mm	mm	mm		EUR
6	0,2	19	24	60	6	6	50,44 06002
6	1,0	19	24	60	6	6	50,44 06010
8	0,2	25	31	67	8	6	69,48 08002
8	1,0	25	31	67	8	6	69,48 08010
10	0,2	31	37	77	10	6	96,24 10002
10	1,0	31	37	77	10	6	96,24 10010
10	1,5	31	37	77	10	6	96,24 10015
12	0,2	37	43	88	12	6	114,30 12002
12	1,0	37	43	88	12	6	114,30 12010
12	1,5	37	43	88	12	6	114,30 12015
12	2,0	37	43	88	12	6	114,30 12020
12	3,0	37	43	88	12	6	114,30 12030
16	0,2	49	56	104	16	6	229,00 16002
16	1,0	49	56	104	16	6	229,00 16010
16	1,5	49	56	104	16	6	229,00 16015
16	2,0	49	56	104	16	6	229,00 16020
16	3,0	49	56	104	16	6	229,00 16030
20	0,2	61	68	118	20	6	330,20 20002
20	1,0	61	68	118	20	6	330,20 20010
20	1,5	61	68	118	20	6	330,20 20015
20	2,0	61	68	118	20	6	330,20 20020
20	3,0	61	68	118	20	6	330,20 20030

hardened < 45 HRC	●
hardened 46–55 HRC	●
hardened 56–60 HRC	●
hardened 61–65 HRC	●
hardened 65–70 HRC	●

→ v_c/f_z Page 285

AluLine – End milling cutter

▲ with polished chip flutes



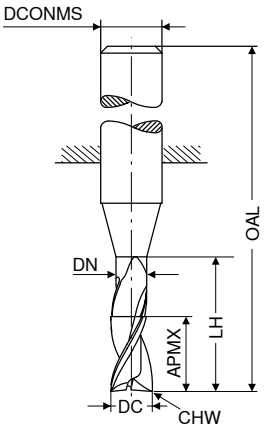



Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA

V1 | V1 | V1 | V1

DC h6	APMX	DN	LH	OAL	DCONMS h5	CHW	ZEFP	Article no. 53 500 ...		Article no. 53 501 ...		Article no. 53 502 ...		Article no. 53 503 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
2,0	8	1,9	16	57	6	0,05	2							24,36	020
2,5	8	2,4	16	57	6	0,10	2							26,01	025
3,0	8	2,9	18	57	6	0,10	2							25,46	030
3,5	11	3,4	18	57	6	0,10	2					28,43	035		
4,0	11	3,9	18	57	6	0,10	2					28,43	040		
4,5	13	4,4	20	57	6	0,10	2					28,00	045		
5,0	13	4,9	20	57	6	0,10	2					26,88	050		
5,5	13	5,4	20	57	6	0,10	2			26,46	055				
6,0	13	5,9	20	57	6	0,10	2			24,91	060				
6,5	16	6,2	26	63	8	0,10	2					37,25	065		
7,0	16	6,7	26	63	8	0,10	2			36,48	070				
7,5	19	7,2	26	63	8	0,10	2			35,60	075				
8,0	19	7,7	26	63	8	0,10	2			34,93	080				
8,5	19	8,2	29	72	10	0,10	2			52,79	085				
9,0	19	8,7	29	72	10	0,10	2			51,47	090				
9,5	22	9,2	29	72	10	0,10	2			50,14	095				
10,0	22	9,7	29	72	10	0,10	2	48,93	100						
10,5	26	10,2	36	83	12	0,10	2			80,24	105				
11,0	26	10,7	36	83	12	0,10	2			78,25	110				
11,5	26	11,2	36	83	12	0,10	2			76,26	115				
12,0	26	11,7	36	83	12	0,10	2			76,26	120				
12,5	26	12,2	36	83	14	0,10	2	99,08	125						
13,0	26	12,7	36	83	14	0,10	2	98,31	130						
13,5	26	13,2	36	83	14	0,10	2	97,54	135						
14,0	26	13,7	36	83	14	0,10	2	98,43	140						
14,5	32	14,0	42	92	16	0,10	2	134,50	145						
15,0	32	14,5	42	92	16	0,10	2	131,30	150						
15,5	32	15,0	42	92	16	0,10	2	129,00	155						
16,0	32	15,5	42	92	16	0,10	2	135,50	160						
16,5	32	16,0	42	92	18	0,10	2	172,00	165						
17,0	32	16,5	42	92	18	0,10	2	168,60	170						
17,5	32	17,0	42	92	18	0,10	2	165,40	175						
18,0	32	17,5	42	92	18	0,10	2	165,40	180						
18,5	38	18,0	52	104	20	0,10	2	206,10	185						
19,0	38	18,5	52	104	20	0,10	2	200,60	190						
19,5	38	19,0	52	104	20	0,10	2	196,30	195						
20,0	38	19,5	52	104	20	0,10	2	195,10	200						

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

AluLine – End milling cutter

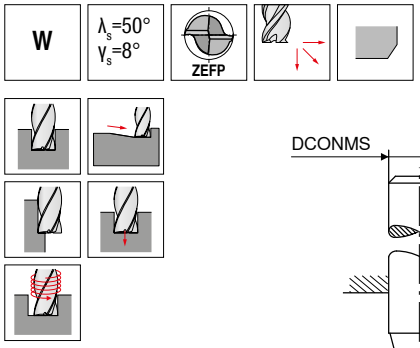

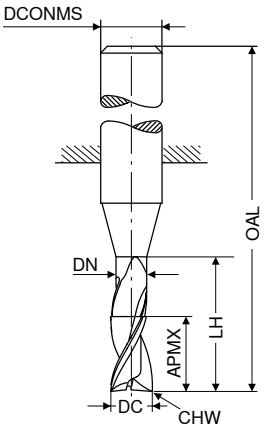

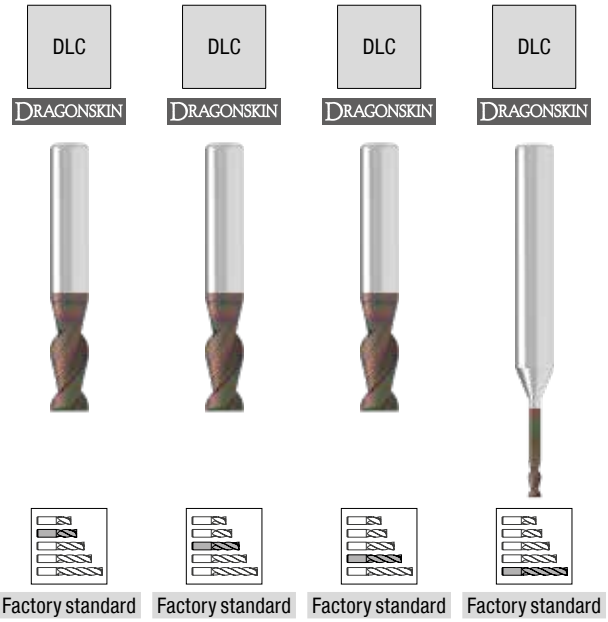

Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA

V1 | V1 | V1 | V1

DC h6	APMX	DN	LH	OAL	DCONMS h5	CHW	ZEFP	Article no. 53 504 ...		Article no. 53 505 ...		Article no. 53 506 ...		Article no. 53 507 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
2,0	8	1,9	16	57	6	0,05	2							35,27	020
2,5	8	2,4	16	57	6	0,10	2							35,71	025
3,0	8	2,9	18	57	6	0,10	2							35,16	030
3,5	11	3,4	18	57	6	0,10	2					38,14	035		
4,0	11	3,9	18	57	6	0,10	2					38,14	040		
4,5	13	4,4	20	57	6	0,10	2					37,80	045		
5,0	13	4,9	20	57	6	0,10	2					36,70	050		
5,5	13	5,4	20	57	6	0,10	2			36,15	055				
6,0	13	5,9	20	57	6	0,10	2			34,61	060				
6,5	16	6,2	26	63	8	0,10	2					46,96	065		
7,0	16	6,7	26	63	8	0,10	2			46,19	070				
7,5	19	7,2	26	63	8	0,10	2			45,41	075				
8,0	19	7,7	26	63	8	0,10	2			44,74	080				
8,5	19	8,2	29	72	10	0,10	2			62,49	085				
9,0	19	8,7	29	72	10	0,10	2			61,29	090				
9,5	22	9,2	29	72	10	0,10	2			59,84	095				
10,0	22	9,7	29	72	10	0,10	2	58,74	100						
10,5	26	10,2	36	83	12	0,10	2			89,94	105				
11,0	26	10,7	36	83	12	0,10	2			87,95	110				
11,5	26	11,2	36	83	12	0,10	2			85,97	115				
12,0	26	11,7	36	83	12	0,10	2			85,97	120				
12,5	26	12,2	36	83	14	0,10	2	108,90	125						
13,0	26	12,7	36	83	14	0,10	2	108,10	130						
13,5	26	13,2	36	83	14	0,10	2	107,20	135						
14,0	26	13,7	36	83	14	0,10	2	108,20	140						
14,5	32	14,0	42	92	16	0,10	2	144,40	145						
15,0	32	14,5	42	92	16	0,10	2	141,00	150						
15,5	32	15,0	42	92	16	0,10	2	137,80	155						
16,0	32	15,5	42	92	16	0,10	2	144,40	160						
16,5	32	16,0	42	92	18	0,10	2	181,80	165						
17,0	32	16,5	42	92	18	0,10	2	177,50	170						
17,5	32	17,0	42	92	18	0,10	2	174,10	175						
18,0	32	17,5	42	92	18	0,10	2	175,20	180						
18,5	38	18,0	52	104	20	0,10	2	216,00	185						
19,0	38	18,5	52	104	20	0,10	2	210,50	190						
19,5	38	19,0	52	104	20	0,10	2	206,10	195						
20,0	38	19,5	52	104	20	0,10	2	205,00	200						

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

14

AluLine – End milling cutter

▲ with polished chip flutes



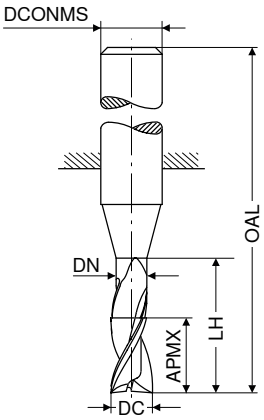



DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V1 Article no. 53 517 ...		V1 Article no. 53 518 ...		V1 Article no. 53 519 ...		V1 Article no. 53 520 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	8	2,7	13	57	6	3							27,33	030
4	11	3,7	17	57	6	3							29,98	040
5	13	4,7	19	57	6	3					29,65	050		
6	13	5,7	19	57	6	3					27,78	060		
6	18	5,7	24	62	6	3							30,09	060
8	21	7,4	25	63	8	3			39,01	080				
8	24	7,4	30	68	8	3					44,42	080		
10	22	9,2	30	72	10	3			54,11	100				
10	30	9,2	38	80	10	3					58,64	100		
12	26	11,0	36	83	12	3			84,20	120				
12	36	11,0	46	93	12	3					91,15	120		
14	26	13,0	36	83	14	3	107,60	140						
16	36	15,0	42	92	16	3	149,90	160						
16	48	15,0	58	108	16	3					164,20	160		
18	36	17,0	42	92	18	3	181,80	180						
20	41	19,0	52	104	20	3	215,00	200						
20	60	19,0	74	126	20	3					307,50	200		

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

AluLine – End milling cutter

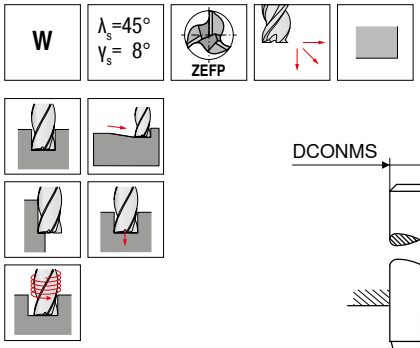

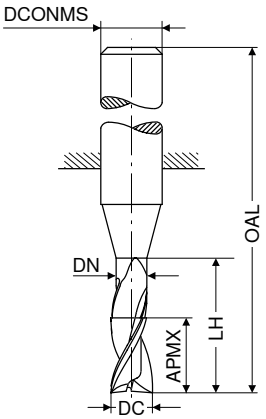

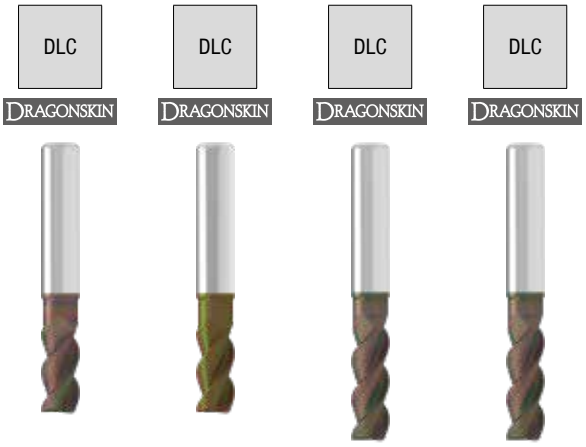



DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V1 Article no. 53 521 ... EUR		V1 Article no. 53 522 ... EUR		V1 Article no. 53 523 ... EUR		V1 Article no. 53 524 ... EUR	
mm	mm	mm	mm	mm	mm									
3	8	2,7	13	57	6	3							37,14	030
4	11	3,7	17	57	6	3							39,79	040
5	13	4,7	19	57	6	3					39,35	050		
6	13	5,7	19	57	6	3					37,59	060		
6	18	5,7	24	62	6	3							39,90	060
8	21	7,4	25	63	8	3			48,71	080				
8	24	7,4	30	68	8	3					54,11	080		
10	22	9,2	30	72	10	3			63,81	100				
10	30	9,2	38	80	10	3					68,44	100		
12	26	11,0	36	83	12	3			93,90	120				
12	36	11,0	46	93	12	3					100,90	120		
14	26	13,0	36	83	14	3	117,90	140						
16	36	15,0	42	92	16	3	159,90	160						
18	36	17,0	42	92	18	3	190,70	180						
20	41	19,0	52	104	20	3	224,90	200						

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

14

AluLine – End milling cutter

▲ with graduated flute depth

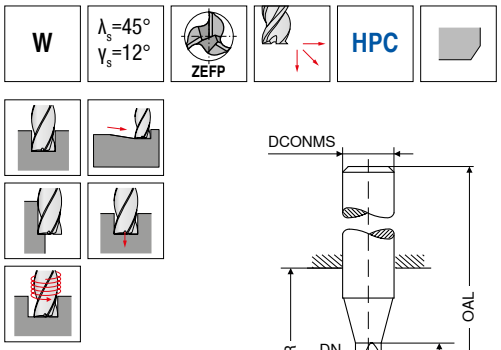

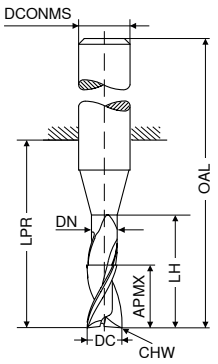

LPR with Shank DIN 6535 HB

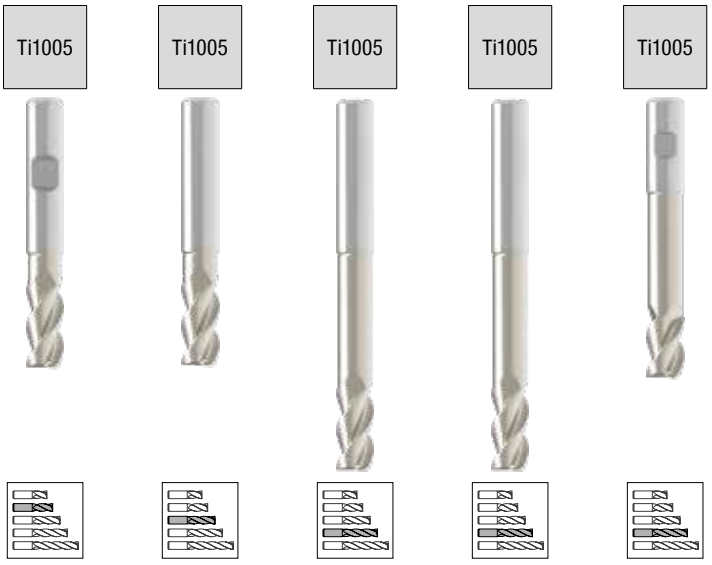

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HB | HA | HA | HA | HB

V1 | V1 | V1 | V1 | V1

DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 53 532 ...		Article no. 53 533 ...		Article no. 53 534 ...		Article no. 53 536 ...		Article no. 53 535 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	
3	8	2,7	12	21	57	6	0,1	3							36,48	030		
4	11	3,7	18	21	57	6	0,1	3							36,48	040		
5	13	4,7	18	21	57	6	0,1	3			33,83	050						
6	13	5,7	18	21	57	6	0,2	3			38,36	060						
8	21	7,4	25	27	63	8	0,2	3			43,98	080						
10	16	9,2	58	60	100	10	0,2	3					99,41	100				
10	22	9,2	30	32	72	10	0,2	3			75,83	100						
10	22	9,2	58	60	100	10	0,2	3							99,41	100		
12	26	11,0	36	38	83	12	0,2	3			102,70	120						
16	36	15,0	42	44	92	16	0,2	3	199,50	160								
18	36	17,0	42	44	92	18	0,2	3	249,10	180								
20	32	19,0	98	100	150	20	0,2	3									400,10	200
20	41	19,0	52	54	104	20	0,2	3	286,50	200								

Steel						
Stainless steel						
Cast iron						
Non ferrous metals	●	●	●	●	●	
Heat resistant alloys						
hardened materials						

→ v_c/f_z Page 288+289

AluLine – End milling cutter

▲ with graduated flute depth

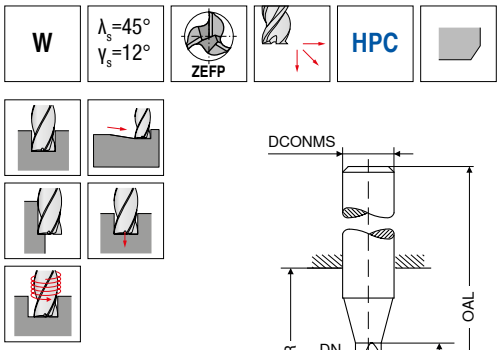

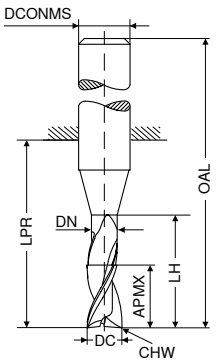

LPR with Shank DIN 6535 HB

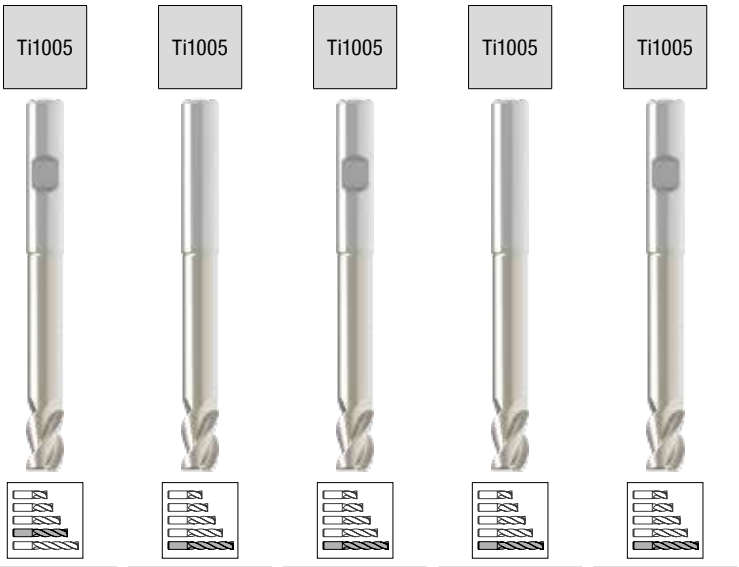

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HB | HA | HB | HA | HB

V1 | V1 | V1 | V1 | V1

DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 53 537 ...		Article no. 53 538 ...		Article no. 53 539 ...		Article no. 53 540 ...		Article no. 53 541 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	
3	5,0	2,7	18	44	80	6	0,1	3							49,26	030		
4	6,5	3,7	24	44	80	6	0,1	3							49,26	040		
5	8,0	4,7	30	44	80	6	0,1	3							49,26	050		
6	10,0	5,7	42	44	80	6	0,2	3			51,69	060						
6	13,0	5,7	42	44	80	6	0,2	3							51,69	060		
8	13,0	7,4	62	64	100	8	0,2	3			67,12	080						
8	21,0	7,4	62	64	100	8	0,2	3							67,12	080		
12	19,0	11,0	73	75	120	12	0,2	3			140,00	120						
12	26,0	11,0	73	75	120	12	0,2	3							140,00	120		
16	25,0	15,0	100	102	150	16	0,2	3					311,90	160				
16	36,0	15,0	100	102	150	16	0,2	3									311,90	160
18	36,0	17,0	100	102	150	18	0,2	3	370,30	180								
20	41,0	19,0	98	100	150	20	0,2	3	400,10	200								

Steel					
Stainless steel					
Cast iron					
Non ferrous metals	●	●	●	●	●
Heat resistant alloys					
hardened materials					

→ v_c/f_z Page 288+289

14

AluLine – End milling cutter

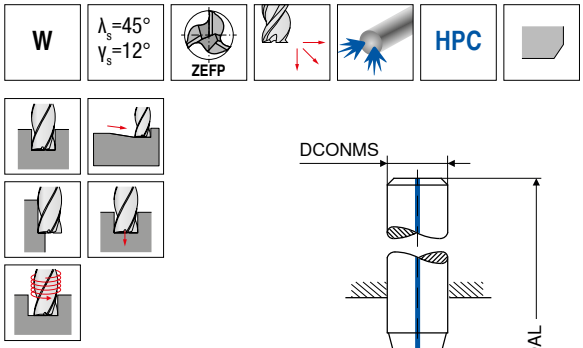

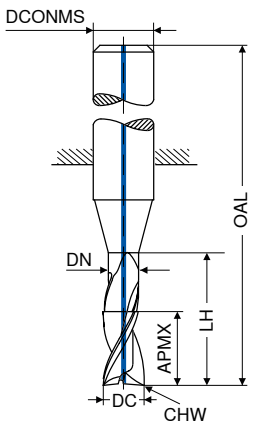

Factory standard

HA

V1

Article no. 53 542 ...

EUR

Factory standard

HA

V1

Article no. 53 543 ...

EUR

DC h10 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR		EUR	
6	10	5,7	42	80	6	0,2	3			64,70	**060**
8	13	7,4	62	100	8	0,2	3			83,88	**080**
10	16	9,2	58	100	10	0,2	3	124,60	**100**		
12	19	11,0	73	120	12	0,2	3			175,20	**120**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 288+289

AluLine – End milling cutter with corner radius

▲ With polished chip flutes

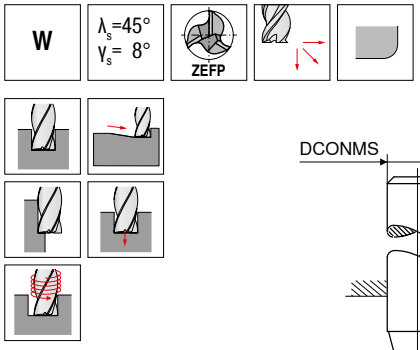

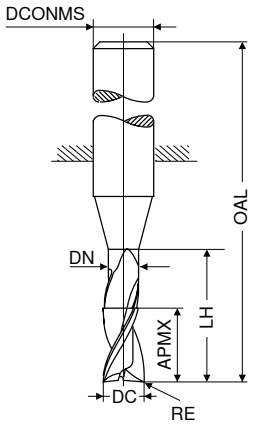

DC h6	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Factory standard HA V1 Article no. 53 525 ...		Factory standard HA V1 Article no. 53 527 ...		Factory standard HA V1 Article no. 53 528 ...		Factory standard HA V1 Article no. 53 530 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
5	0,5	13	4,7	19	57	6	3			24,14	05005				
5	1,0	13	4,7	19	57	6	3			24,14	05010				
6	0,5	10	5,7	42	80	6	3							33,06	06005
6	0,5	13	5,7	19	57	6	3			24,14	06005				
6	1,0	10	5,7	42	80	6	3							33,06	06010
6	1,0	13	5,7	19	57	6	3			24,14	06010				
8	0,5	13	7,4	62	100	8	3							46,29	08005
8	0,5	21	7,4	25	63	8	3			30,20	08005				
8	1,0	13	7,4	62	100	8	3							46,29	08010
8	1,0	21	7,4	25	63	8	3			30,20	08010				
10	0,5	16	9,2	58	100	10	3					64,47	10005		
10	0,5	22	9,2	30	72	10	3			43,98	10005				
10	1,0	16	9,2	58	100	10	3					64,47	10010		
10	1,0	22	9,2	30	72	10	3			43,98	10010				
12	0,5	19	11,0	73	120	12	3							94,67	12005
12	0,5	26	11,0	36	83	12	3			63,26	12005				
12	1,0	19	11,0	73	120	12	3							94,67	12010
12	1,0	26	11,0	36	83	12	3			63,26	12010				
16	2,0	25	15,0	100	150	16	3							180,80	16020
16	2,0	36	15,0	42	92	16	3	107,50	16020						
16	4,0	25	15,0	100	150	16	3							180,80	16040
16	4,0	36	15,0	42	92	16	3	107,50	16040						
20	4,0	32	19,0	98	150	20	3					296,50	20040		
20	4,0	41	19,0	52	104	20	3	167,50	20040						

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

AluLine – End milling cutter with corner radius

▲ With polished chip flutes

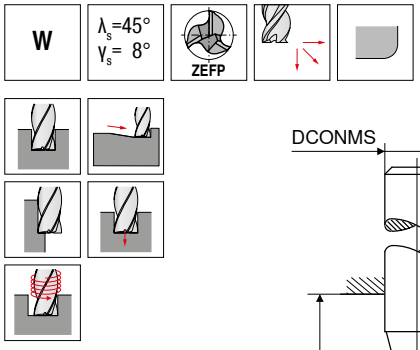

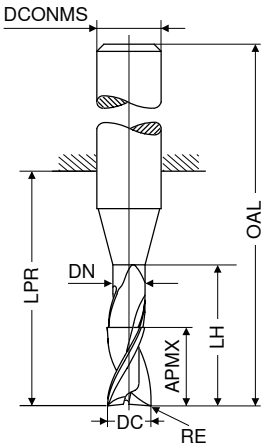

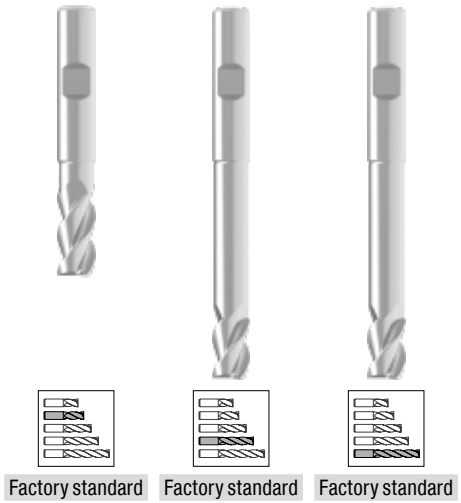

Factory standard | Factory standard | Factory standard

HB | HB | HB

V1 | V1 | V1

DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 53 526 ...		Article no. 53 529 ...		Article no. 53 531 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
16	2	25	15	100	102	150	16	3					180,80	**16020**
16	2	36	15	42	44	92	16	3	107,50	**16020**				
16	4	25	15	100	102	150	16	3					180,80	**16040**
16	4	36	15	42	44	92	16	3	107,50	**16040**				
20	4	32	19	98	100	150	20	3			296,50	**20040**		
20	4	41	19	52	54	104	20	3	167,50	**20040**				

Steel			
Stainless steel			
Cast iron			
Non ferrous metals	●	●	●
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 288+289

AluLine – End milling cutter with corner radius

▲ With graduated flute depth

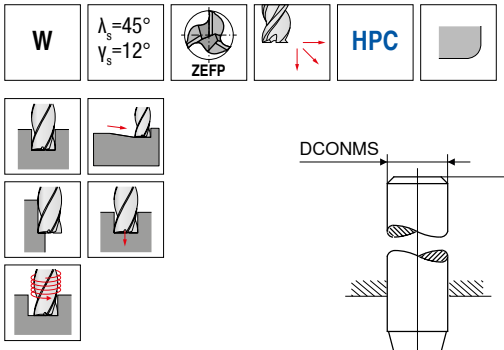

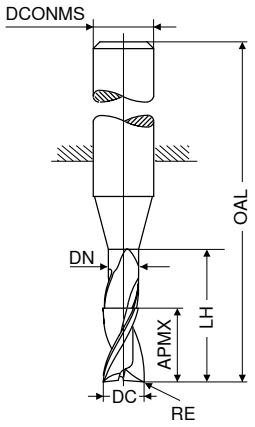

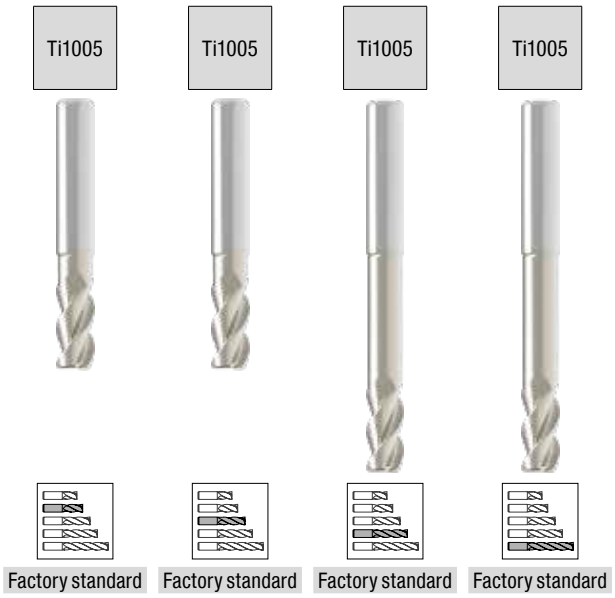

Factory standard | Factory standard | Factory standard | Factory standard

DC h6	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V1 Article no. 53 544 ... EUR	V1 Article no. 53 545 ... EUR	V1 Article no. 53 547 ... EUR	V1 Article no. 53 549 ... EUR
mm	mm	mm	mm	mm	mm	mm					
3	0,4	8	2,7	12	57	6	3			36,04 03004	
3	0,5	8	2,7	12	57	6	3			36,04 03005	
3	1,0	8	2,7	12	57	6	3			36,04 03010	
4	0,2	11	3,7	18	57	6	3			36,04 04002	
4	0,4	11	3,7	18	57	6	3			36,04 04004	
4	0,5	11	3,7	18	57	6	3			36,04 04005	
4	1,0	11	3,7	18	57	6	3			36,04 04010	
5	0,5	13	4,7	18	57	6	3		36,04 05005		
5	1,0	13	4,7	18	57	6	3		36,04 05010		
6	0,4	13	5,7	18	57	6	3		40,88 06004		
6	0,4	13	5,7	42	80	6	3				56,43 06004
6	0,5	13	5,7	18	57	6	3		40,88 06005		
6	0,5	13	5,7	42	80	6	3				56,43 06005
6	0,6	13	5,7	18	57	6	3		40,88 06006		
6	0,6	13	5,7	42	80	6	3				56,43 06006
6	0,8	13	5,7	18	57	6	3		40,88 06008		
6	0,8	13	5,7	42	80	6	3				56,43 06008
6	1,0	13	5,7	18	57	6	3		40,88 06010		
6	1,0	13	5,7	42	80	6	3				56,43 06010
6	1,5	13	5,7	18	57	6	3		40,88 06015		
6	1,5	13	5,7	42	80	6	3				56,43 06015
8	0,5	21	7,4	25	63	8	3		46,84 08005		
8	0,5	21	7,4	62	100	8	3				73,40 08005
8	0,8	21	7,4	25	63	8	3		46,84 08008		
8	0,8	21	7,4	62	100	8	3				73,40 08008
8	1,0	21	7,4	25	63	8	3		46,84 08010		
8	1,0	21	7,4	62	100	8	3				73,40 08010
8	1,2	21	7,4	25	63	8	3		46,84 08012		
8	1,2	21	7,4	62	100	8	3				73,40 08012
8	1,5	21	7,4	25	63	8	3		46,84 08015		
8	1,5	21	7,4	62	100	8	3				73,40 08015
8	2,0	21	7,4	25	63	8	3		46,84 08020		
8	2,0	21	7,4	62	100	8	3				73,40 08020
10	0,5	22	9,2	30	72	10	3		80,89 10005		
10	0,5	22	9,2	58	100	10	3			108,70 10005	
10	1,0	22	9,2	30	72	10	3		80,89 10010		
10	1,0	22	9,2	58	100	10	3			108,70 10010	
10	1,2	22	9,2	30	72	10	3		80,89 10012		
10	1,2	22	9,2	58	100	10	3			108,70 10012	
10	1,5	22	9,2	30	72	10	3		80,89 10015		

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

14

Continued on next page

AluLine – End milling cutter with corner radius

▲ With graduated flute depth





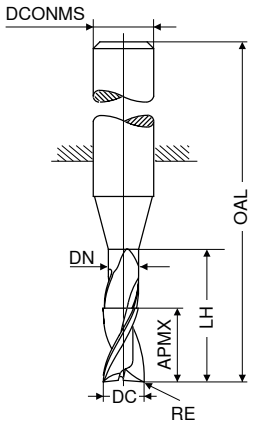

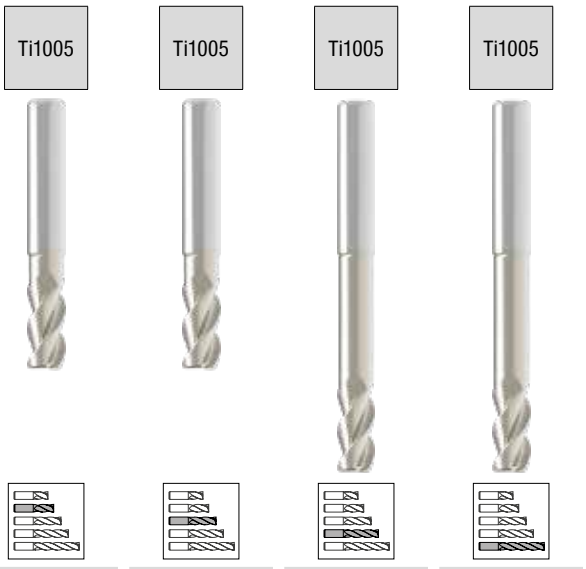

Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA

V1 | V1 | V1 | V1

DC h6	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Article no. 53 544 ...		Article no. 53 545 ...		Article no. 53 547 ...		Article no. 53 549 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
10	1,5	22	9,2	58	100	10	3					108,70	10015		
10	1,6	22	9,2	30	72	10	3			80,89	10016				
10	1,6	22	9,2	58	100	10	3					108,70	10016		
10	2,0	22	9,2	30	72	10	3			80,89	10020				
10	2,0	22	9,2	58	100	10	3					108,70	10020		
12	0,5	26	11,0	73	120	12	3							155,50	12005
12	1,0	26	11,0	73	120	12	3							155,50	12010
12	1,2	26	11,0	73	120	12	3							155,50	12012
12	1,5	26	11,0	73	120	12	3							155,50	12015
12	1,6	26	11,0	73	120	12	3							155,50	12016
12	2,0	26	11,0	73	120	12	3							155,50	12020
12	2,5	26	11,0	73	120	12	3							155,50	12025
12	4,0	26	11,0	73	120	12	3							155,50	12040
16	1,0	36	15,0	42	92	16	3	212,80	16010						
16	1,0	36	15,0	100	150	16	3							328,50	16010
16	1,6	36	15,0	42	92	16	3	212,80	16016						
16	1,6	36	15,0	100	150	16	3							328,50	16016
16	2,0	36	15,0	42	92	16	3	212,80	16020						
16	2,0	36	15,0	100	150	16	3							328,50	16020
16	2,5	36	15,0	42	92	16	3	212,80	16025						
16	2,5	36	15,0	100	150	16	3							328,50	16025
16	3,2	36	15,0	42	92	16	3	212,80	16032						
16	3,2	36	15,0	100	150	16	3							328,50	16032
16	4,0	36	15,0	42	92	16	3	212,80	16040						
16	4,0	36	15,0	100	150	16	3							328,50	16040
20	1,0	41	19,0	52	104	20	3	305,30	20010						
20	1,0	41	19,0	98	150	20	3					423,30	20010		
20	2,0	41	19,0	52	104	20	3	305,30	20020						
20	2,0	41	19,0	98	150	20	3					423,30	20020		
20	4,0	41	19,0	52	104	20	3	305,30	20040						
20	4,0	41	19,0	98	150	20	3					423,30	20040		
20	5,0	41	19,0	52	104	20	3	305,30	20050						
20	5,0	41	19,0	98	150	20	3					423,30	20050		
20	6,3	41	19,0	52	104	20	3	305,30	20063						
20	6,3	41	19,0	98	150	20	3					423,30	20063		

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

AluLine – End milling cutter with corner radius

▲ with graduated flute depth



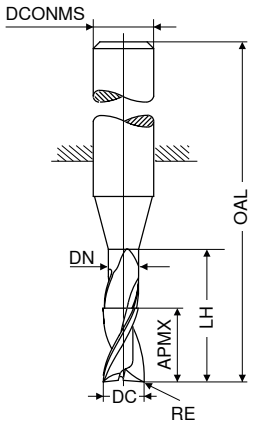

Factory standard | Factory standard

HA | HA

DC h6	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V1 Article no. 53 546 ...		V1 Article no. 53 548 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
6	0,4	10	5,7	42	80	6	3			56,43	06004
6	0,5	10	5,7	42	80	6	3			56,43	06005
6	0,6	10	5,7	42	80	6	3			56,43	06006
6	0,8	10	5,7	42	80	6	3			56,43	06008
6	1,0	10	5,7	42	80	6	3			56,43	06010
6	1,5	10	5,7	42	80	6	3			56,43	06015
8	0,5	13	7,4	62	100	8	3			73,40	08005
8	0,8	13	7,4	62	100	8	3			73,40	08008
8	1,0	13	7,4	62	100	8	3			73,40	08010
8	1,2	13	7,4	62	100	8	3			73,40	08012
8	1,5	13	7,4	62	100	8	3			73,40	08015
8	2,0	13	7,4	62	100	8	3			73,40	08020
10	0,5	16	9,2	58	100	10	3	108,70	10005		
10	1,0	16	9,2	58	100	10	3	108,70	10010		
10	1,2	16	9,2	58	100	10	3	108,70	10012		
10	1,5	16	9,2	58	100	10	3	108,70	10015		
10	1,6	16	9,2	58	100	10	3	108,70	10016		
10	2,0	16	9,2	58	100	10	3	108,70	10020		
12	0,5	19	11,0	73	120	12	3			155,50	12005
12	1,0	19	11,0	73	120	12	3			155,50	12010
12	1,2	19	11,0	73	120	12	3			155,50	12012
12	1,5	19	11,0	73	120	12	3			155,50	12015
12	1,6	19	11,0	73	120	12	3			155,50	12016
12	2,0	19	11,0	73	120	12	3			155,50	12020
12	2,5	19	11,0	73	120	12	3			155,50	12025
12	4,0	19	11,0	73	120	12	3			155,50	12040
16	0,5	25	15,0	100	150	16	3			328,50	16005
16	1,6	25	15,0	100	150	16	3			328,50	16016
16	2,0	25	15,0	100	150	16	3			328,50	16020
16	2,5	25	15,0	100	150	16	3			328,50	16025
16	3,2	25	15,0	100	150	16	3			328,50	16032
16	4,0	25	15,0	100	150	16	3			328,50	16040
20	1,0	32	19,0	98	150	20	3	423,30	20010		
20	2,0	32	19,0	98	150	20	3	423,30	20020		
20	4,0	32	19,0	98	150	20	3	423,30	20040		
20	5,0	32	19,0	98	150	20	3	423,30	20050		
20	6,3	32	19,0	98	150	20	3	423,30	20063		

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 288+289

14

AluLine – Roughing-Finishing cutter

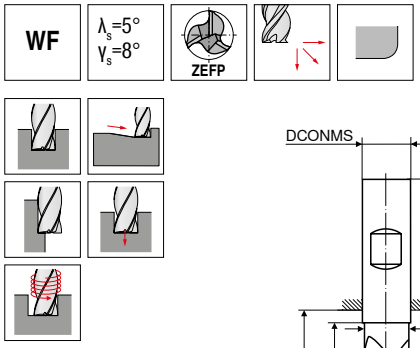

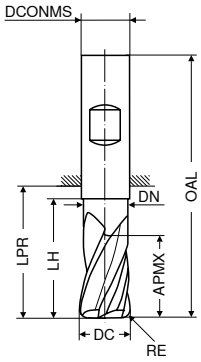

LPR with Shank DIN 6535 HB

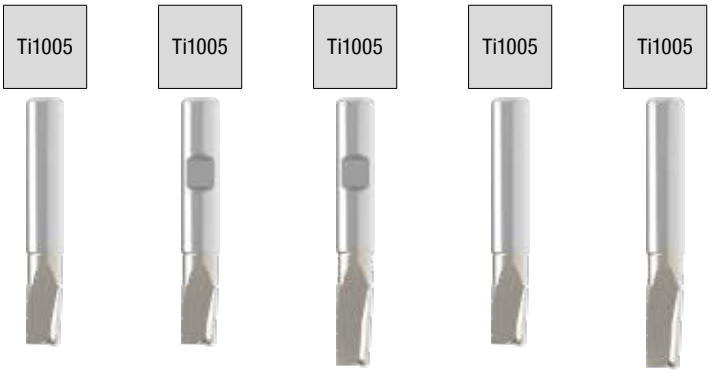



									Factory standard		Factory standard		Factory standard		Factory standard		Factory standard	
									HA		HB		HB		HA		HA	
									V1		V1		V1		V1		V1	
DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 53 512 ...		Article no. 53 513 ...		Article no. 53 514 ...		Article no. 53 515 ...		Article no. 53 516 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	
5	0,15	8	4,7	16	18	54	6	3							34,93	05002		
5	0,15	13	4,7	18	21	57	6	3									34,93	05002
6	0,20	10	5,7	17	18	54	6	3	34,93	06002								
6	0,20	13	5,7	18	21	57	6	3									34,93	06002
8	0,25	13	7,4	20	22	58	8	3	40,46	08003								
8	0,25	21	7,4	25	27	63	8	3									42,98	08003
10	0,30	16	9,2	24	26	66	10	3	56,32	10003								
10	0,30	22	9,2	30	32	72	10	3									59,96	10003
12	0,35	19	11,0	26	28	73	12	3	78,58	12004								
12	0,35	26	11,0	36	38	83	12	3									81,78	12004
16	0,50	25	15,0	32	38	82	16	3			133,30	16005						
16	0,50	36	15,0	42	44	92	16	3					140,00	16005				
20	0,60	32	19,0	40	42	92	20	3			224,90	20006						
20	0,60	41	19,0	52	54	104	20	3					241,40	20006				

Steel					
Stainless steel					
Cast iron					
Non ferrous metals	●	●	●	●	●
Heat resistant alloys					
hardened materials					

→ v_c/f_z Page 288+289

AluLine – Rough milling cutter

WR | λ_s=40° γ_s=10° | ZEFP | HPC



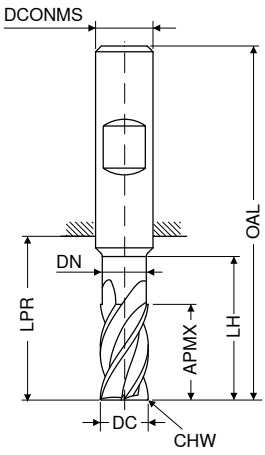

Factory standard

HA

Factory standard

HB

DC $_{h10}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	V1 Article no. 53 551 ...		V1 Article no. 53 550 ...	
									EUR		EUR	
6	13	5,7	18	21	57	6	0,4	3	29,20	**060**		
8	21	7,4	25	27	63	8	0,4	3	37,59	**080**		
10	22	9,2	30	32	72	10	0,4	3	49,48	**100**		
12	26	11,0	36	38	83	12	0,4	3	61,06	**120**		
16	36	15,0	42	44	92	16	0,4	3			95,00	**160**
20	41	19,0	52	54	104	20	0,4	3			144,40	**200**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 288+289

14

AluLine – Rough milling cutter

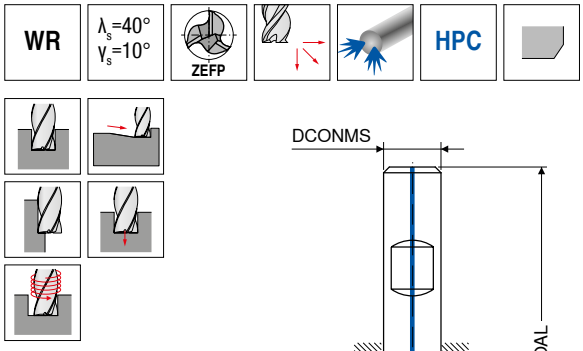

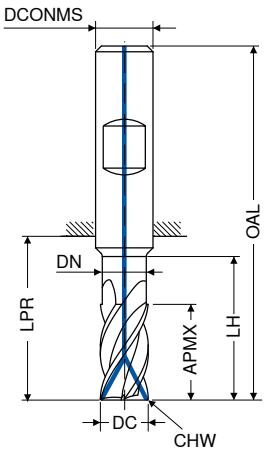



DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	V1 Article no. 53 552 ...		V1 Article no. 53 553 ...		V1 Article no. 53 554 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
6	13	5,7	18	21	57	6	0,4	3					40,46	060
8	21	7,4	25	27	63	8	0,4	3					53,68	080
10	22	9,2	30	32	72	10	0,4	3					63,04	100
12	26	11,0	36	38	83	12	0,4	3					82,44	120
16	36	15,0	42	44	92	16	0,4	3	122,30	160	122,30	160		
20	41	19,0	52	54	104	20	0,4	3	212,80	200	212,80	200		

Steel			
Stainless steel			
Cast iron			
Non ferrous metals	●	●	●
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 288+289

AluLine – End milling cutter

▲ with polished chip flutes

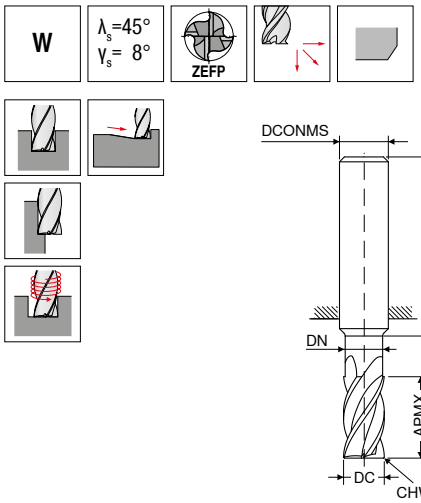

DC h10	APMX	DN	LH	OAL	DCONMS h6	CHW	ZEFP	Factory standard HA V1 Article no. 53 560 ... EUR		Factory standard HA V1 Article no. 53 561 ... EUR		Factory standard HA V1 Article no. 53 562 ... EUR		Factory standard HA V1 Article no. 53 563 ... EUR		Factory standard HA V1 Article no. 53 564 ... EUR	
mm	mm	mm	mm	mm	mm	mm											
3,0	8	2,7	13	57	6	0,1	4							29,43	030		
3,5	11	3,2	17	57	6	0,1	4							32,84	035		
4,0	11	3,7	17	57	6	0,1	4							32,84	040		
4,5	13	4,2	19	57	6	0,1	4							34,72	045		
5,0	13	4,7	19	57	6	0,1	4					32,18	050				
5,5	13	5,2	19	57	6	0,1	4					31,74	055				
6,0	10	5,7	42	80	6	0,2	4									33,96	060
6,0	13	5,7	19	57	6	0,2	4					33,96	060				
6,0	18	5,7	24	62	6	0,2	4							33,96	060		
6,5	21	6,1	25	63	8	0,2	4					45,51	065				
8,0	13	7,4	62	100	8	0,2	4									48,38	080
8,0	21	7,4	25	63	8	0,2	4			48,38	080						
8,0	24	7,4	30	68	8	0,2	4					48,38	080				
8,5	22	7,9	30	72	10	0,2	4					60,84	085				
10,0	16	9,2	58	100	10	0,2	4							63,71	100		
10,0	22	9,2	30	72	10	0,2	4			63,71	100						
10,0	30	9,2	38	80	10	0,2	4					63,71	100				
12,0	19	11,0	73	120	12	0,2	4									97,98	120
12,0	26	11,0	36	83	12	0,2	4			97,98	120						
12,0	36	11,0	46	93	12	0,2	4					97,98	120				
14,0	26	13,0	36	83	14	0,2	4	113,60	140								
16,0	25	15,0	100	150	16	0,2	4									179,60	160
16,0	36	15,0	42	92	16	0,2	4	179,60	160								
16,0	48	15,0	58	108	16	0,2	4					179,60	160				
18,0	36	17,0	42	92	18	0,2	4	192,80	180								
20,0	32	19,0	98	150	20	0,2	4							329,60	200		
20,0	41	19,0	52	104	20	0,2	4	329,60	200								
20,0	60	19,0	74	126	20	0,2	4					329,60	200				
25,0	52	24,0	62	121	25	0,3	4	430,90	250								

Steel					
Stainless steel					
Cast iron					
Non ferrous metals	●	●	●	●	●
Heat resistant alloys					
hardened materials					

14

→ v_c/f_z Page 288+289

AluLine – End milling cutter

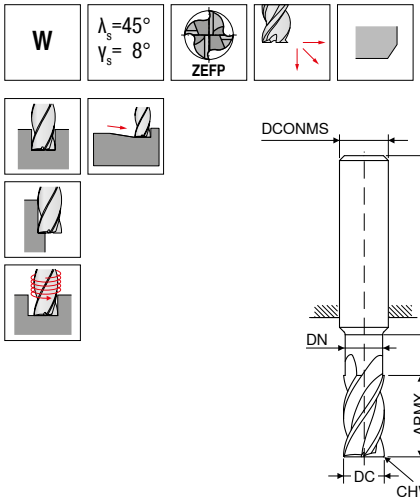

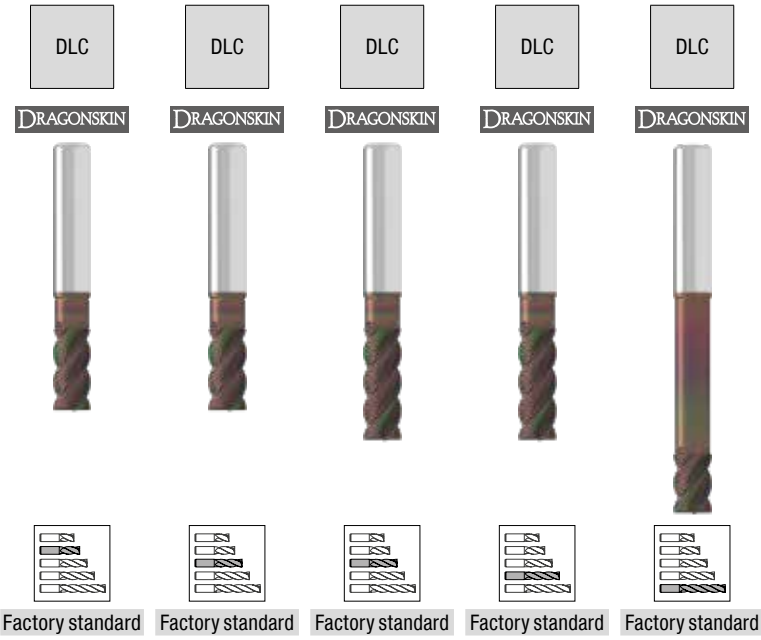

Factory standard

HA

V1

DC h10	APMX	DN	LH	OAL	DCONMS h6	CHW	ZEFP	Article no. 53 565 ...		Article no. 53 566 ...		Article no. 53 567 ...		Article no. 53 568 ...		Article no. 53 569 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	
3,0	8	2,7	13	57	6	0,1	4							39,24	030		
3,5	11	3,2	17	57	6	0,1	4							42,54	035		
4,0	11	3,7	17	57	6	0,1	4							42,54	040		
4,5	13	4,2	19	57	6	0,1	4							44,53	045		
5,0	13	4,7	19	57	6	0,1	4					41,98	050				
5,5	13	5,2	19	57	6	0,1	4					41,43	055				
6,0	10	5,7	42	80	6	0,2	4									43,64	060
6,0	13	5,7	19	57	6	0,2	4					43,64	060				
6,0	18	5,7	24	62	6	0,2	4							43,64	060		
6,5	21	6,1	25	63	8	0,2	4					55,21	065				
8,0	13	7,4	62	100	8	0,2	4									58,08	080
8,0	21	7,4	25	63	8	0,2	4			58,08	080						
8,0	24	7,2	30	68	8	0,2	4					58,08	080				
8,5	22	7,9	30	72	10	0,2	4					70,54	085				
10,0	16	9,2	58	100	10	0,2	4							73,40	100		
10,0	22	9,2	30	72	10	0,2	4			73,40	100						
10,0	30	9,2	38	80	10	0,2	4					73,40	100				
12,0	19	11,0	73	120	12	0,2	4									107,60	120
12,0	26	11,0	36	83	12	0,2	4			107,60	120						
12,0	36	11,0	46	93	12	0,2	4					107,60	120				
14,0	26	13,0	36	83	14	0,2	4	123,50	140								
16,0	25	15,0	100	150	16	0,2	4									189,60	160
16,0	36	15,0	42	92	16	0,2	4	189,60	160								
16,0	48	15,0	58	108	16	0,2	4					189,60	160				
18,0	36	17,0	42	92	18	0,2	4	202,80	180								
20,0	32	19,0	98	150	20	0,2	4							338,30	200		
20,0	41	19,0	52	104	20	0,2	4	338,30	200								
20,0	60	19,0	74	126	20	0,2	4					338,30	200				
25,0	52	24,0	62	121	25	0,3	4	441,90	250								

Steel						
Stainless steel						
Cast iron						
Non ferrous metals	●	●	●	●	●	
Heat resistant alloys						
hardened materials						

→ v_c/f_z Page 288+289

AluLine – End milling cutter

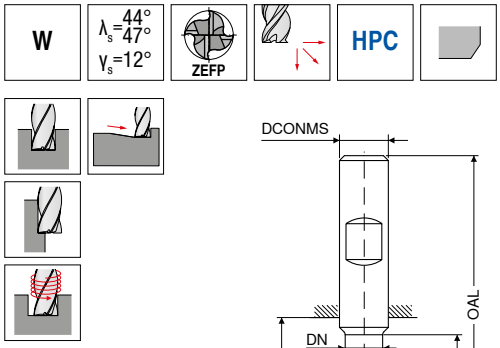

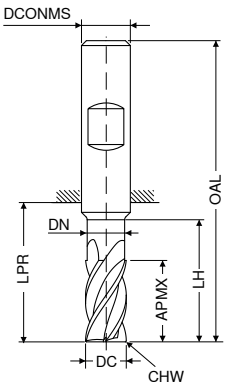

LPR with Shank DIN 6535 HB

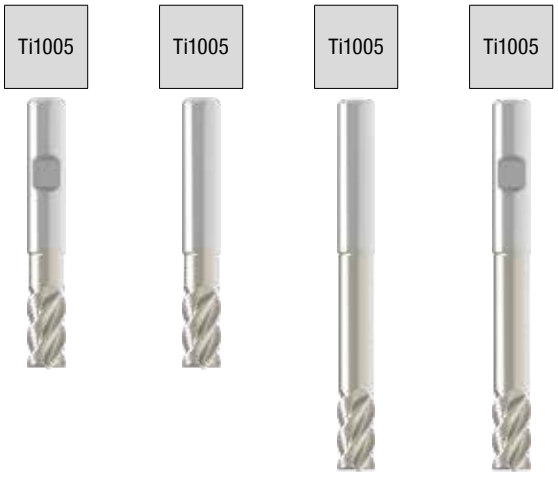



									Factory standard		Factory standard		Factory standard		Factory standard	
									HB		HA		HA		HB	
									V1		V1		V1		V1	
DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 53 570 ...		Article no. 53 571 ...		Article no. 53 572 ...		Article no. 53 573 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	6	2,7	10	21	57	6	0,1	4			36,15	030				
4	8	3,7	14	21	57	6	0,1	4			36,15	040				
4	16	3,7	22	26	62	6	0,1	4					48,61	040		
5	10	4,7	16	21	57	6	0,1	4			33,40	050				
5	17	4,7	24	26	62	6	0,1	4					48,61	050		
6	12	5,5	19	21	57	6	0,2	4			38,03	060				
8	16	7,4	25	27	63	8	0,2	4			43,53	080				
10	20	9,2	30	32	72	10	0,2	4			74,72	100				
10	20	9,2	58	60	100	10	0,2	4					102,30	100		
12	24	11,0	36	38	83	12	0,2	4			101,50	120				
16	32	15,0	42	44	92	16	0,2	4	198,30	160						
20	40	19,0	52	54	104	20	0,2	4	286,50	200						
20	40	19,0	98	100	150	20	0,2	4							413,30	200

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 288+289

14

AluLine – End milling cutter

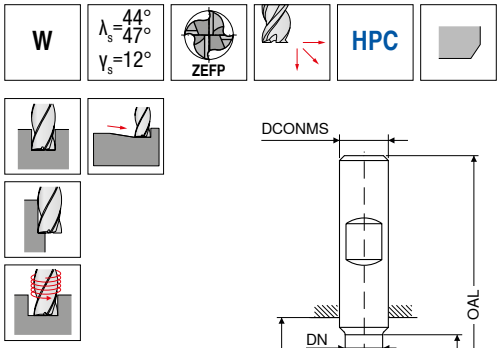

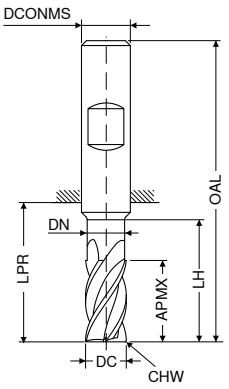

Factory standard | Factory standard

HA | HB

V1 | V1

DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 53 574 ...		Article no. 53 575 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
6	12	5,5	42	44	80	6	0,2	4	53,24	**060**		
8	16	7,4	62	64	100	8	0,2	4	68,99	**080**		
12	24	11,0	73	75	120	12	0,2	4	144,40	**120**		
16	32	15,0	100	102	150	16	0,2	4			320,70	**160**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 288+289

AluLine – End milling cutter

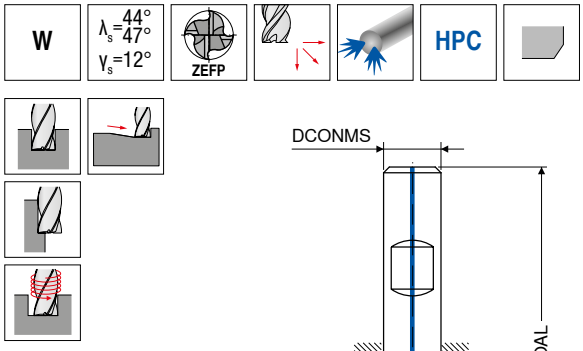

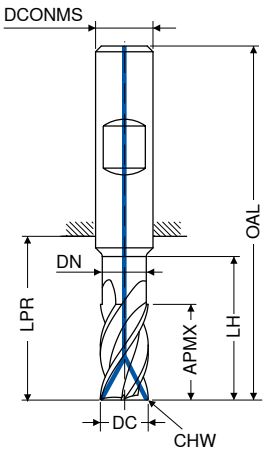

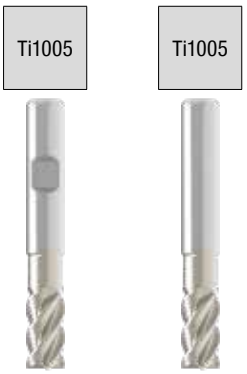

Factory standard | Factory standard

HB | HA

DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	V1 Article no. 53 576 ...		V1 Article no. 53 577 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3	6	2,7	10	21	57	6	0,1	4			46,96	030
4	8	3,7	14	21	57	6	0,1	4			46,96	040
5	10	4,7	16	21	57	6	0,1	4			43,53	050
6	12	5,7	19	21	57	6	0,2	4			49,38	060
8	16	7,4	25	27	63	8	0,2	4			56,53	080
10	20	9,2	30	32	72	10	0,2	4			97,09	100
12	24	11,0	36	38	83	12	0,2	4			138,80	120
16	32	15,0	42	44	92	16	0,2	4	257,90	160		
20	40	19,0	52	54	104	20	0,2	4	370,30	200		

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 288+289

AluLine – High accuracy finish milling cutter

▲ max. taper of 0.003 mm for high precision and parallelism of vertical walls
▲ Tool with cutting edge correction

W | λ_s=44° γ_s=20° | ZEFP | HPC



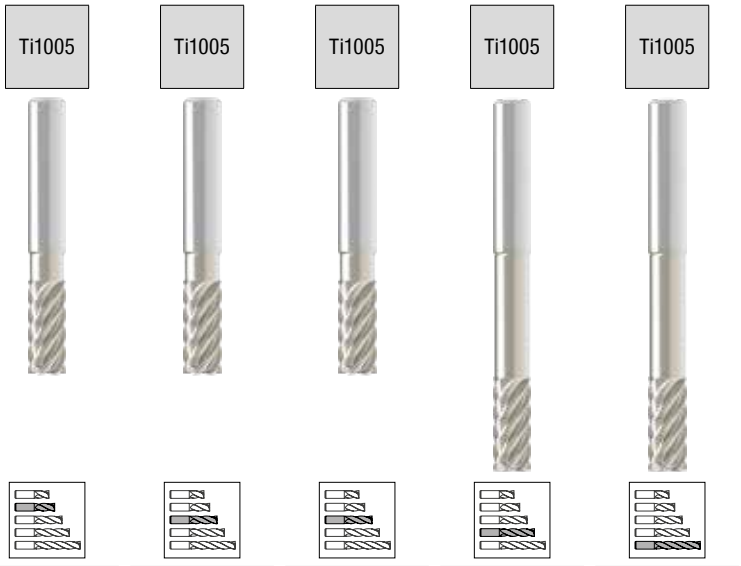

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA | HA

V1 | V1 | V1 | V1 | V1

DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Article no. 53 555 ...		Article no. 53 556 ...		Article no. 53 557 ...		Article no. 53 558 ...		Article no. 53 559 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	
6	16	5,7	20	58	6	6					40,11	060				
6	16	5,7	42	80	6	6									54,56	060
8	19	7,4	26	64	8	6					46,29	080				
8	19	7,4	62	100	8	6									67,56	080
10	25	9,2	32	74	10	6					79,02	100				
10	25	9,2	58	100	10	6							100,90	100		
12	30	11,0	37	84	12	6			107,20	120						
12	30	11,0	73	120	12	6									149,90	120
12	45			120	12	6					181,80	120				
16	40	15,0	44	93	16	6	199,50	160								
16	40	15,0	100	150	16	6									274,50	160
16	65			150	16	6							393,50	160		
20	50	19,0	53	104	20	6	287,70	200								
20	50	19,0	98	150	20	6							379,10	200		
20	75			150	20	6					521,40	200				

Steel					
Stainless steel					
Cast iron					
Non ferrous metals	●	●	●	●	●
Heat resistant alloys					
hardened materials					

→ v_c/f_z Page 290+291

AluLine – Ball nosed cutter

▲ With polished chip flutes

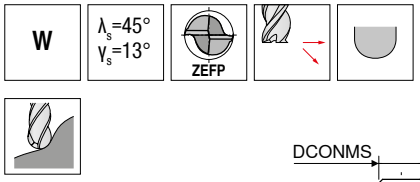

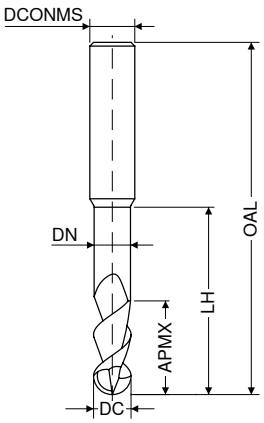

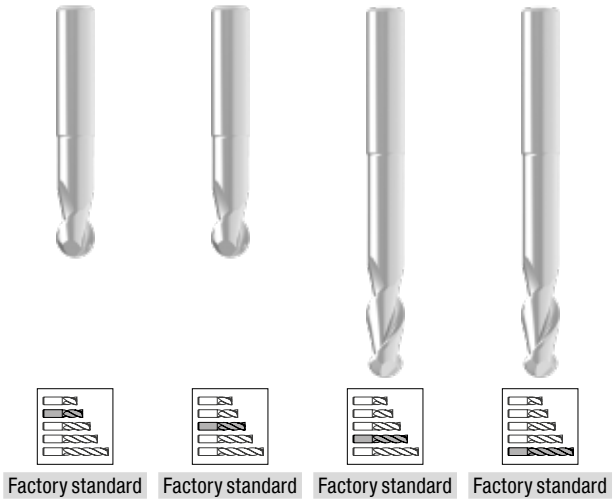

DC f8	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Factory standard HA V1 Article no. 53 508 ...		Factory standard HA V1 Article no. 53 509 ...		Factory standard HA V1 Article no. 53 510 ...		Factory standard HA V1 Article no. 53 511 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	6	2,7	16	50	3	2					28,22	030		
3	10	2,7	32	75	3	2							41,01	030
4	7	3,7	17	54	4	2					33,51	040		
4	13	3,7	36	75	4	2							47,29	040
5	8	4,6	18	54	5	2			37,48	050				
5	15	4,6	40	75	5	2							54,34	050
6	10	5,5	21	54	6	2			36,48	060				
6	16	5,5	44	100	6	2							49,71	060
8	12	7,5	27	59	8	2			46,51	080				
8	22	7,5	54	100	8	2							68,78	080
10	13	9,4	32	67	10	2			61,16	100				
10	25	9,4	60	100	10	2							91,70	100
12	16	11,4	38	73	12	2			81,89	120				
12	26	11,4	60	100	12	2					119,10	120		
14	16	13,2	38	75	14	2	134,50	140						
14	26	13,2	60	100	14	2					166,50	140		
16	20	15,0	44	83	16	2	164,20	160						
16	30	15,0	92	150	16	2					223,80	160		
20	25	19,0	50	93	20	2	227,00	200						
20	40	19,0	92	150	20	2					308,60	200		

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 290+291

14

SilverLine – End milling cutter

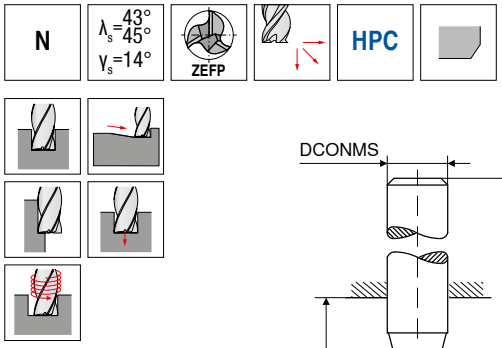

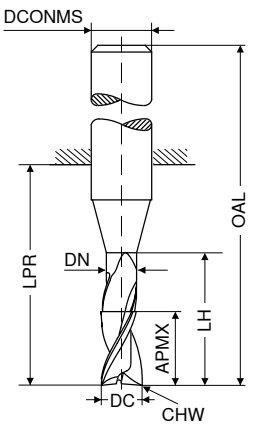

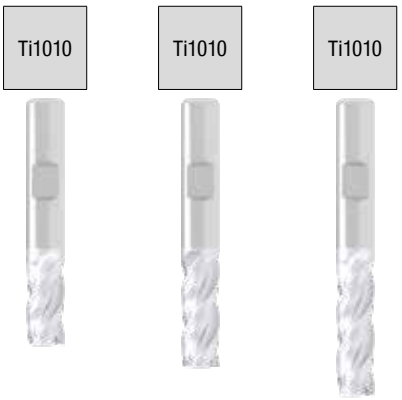

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h5	CHW	ZEFP	≈DIN 6527 HB V0 Article no. 50 951 ...		≈DIN 6527 HB V0 Article no. 50 951 ...		Factory standard HB V0 Article no. 50 951 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
3,0	8	2,9	15	21	57	6	0,15	3			55,00	031		
3,5	11	3,4	16	21	57	6	0,15	3			55,00	036		
4,0	8	3,9	15	18	54	6	0,15	3	52,90	040				
4,0	11	3,9	16	21	57	6	0,15	3			52,90	041		
4,0	16			26	62	6	0,15	3					55,99	042
4,5	13	4,4	19	21	57	6	0,15	3			55,00	046		
5,0	9	4,9	16	18	54	6	0,15	3	52,90	050				
5,0	13	4,9	19	21	57	6	0,15	3			52,90	051		
5,0	17			26	62	6	0,15	3					55,99	052
5,5	13	5,4	19	21	57	6	0,15	3			57,76	056		
6,0	10	5,9	17	18	54	6	0,25	3	55,00	060				
6,0	13	5,9	19	21	57	6	0,25	3			55,66	061		
6,0	18			26	62	6	0,25	3					62,05	062
6,5	19	6,3	25	27	63	8	0,25	3			66,34	066		
7,0	19	6,8	25	27	63	8	0,25	3			66,34	071		
7,5	19	7,3	25	27	63	8	0,25	3			66,34	076		
8,0	12	7,8	20	22	58	8	0,25	3	62,61	080				
8,0	19	7,8	25	27	63	8	0,25	3			65,14	081		
8,0	24			32	68	8	0,25	3					69,54	082
8,5	22	8,2	30	32	72	10	0,25	3			111,30	086		
9,0	22	8,7	30	32	72	10	0,25	3			111,30	091		
9,5	22	9,2	30	32	72	10	0,25	3			111,30	096		
10,0	14	9,7	24	26	66	10	0,25	3	99,30	100				
10,0	22	9,7	30	32	72	10	0,25	3			110,10	101		
10,0	30			40	80	10	0,25	3					124,60	102
12,0	16	11,7	26	28	73	12	0,25	3	138,80	120				
12,0	26	11,7	36	38	83	12	0,25	3			149,90	121		
12,0	36			48	93	12	0,25	3					167,50	122
14,0	18	13,7	28	30	75	14	0,25	3	173,10	140				
14,0	26	13,7	36	38	83	14	0,25	3			197,30	141		
14,0	42			54	99	14	0,25	3					218,30	142
16,0	22	15,5	32	34	82	16	0,25	3	205,00	160				
16,0	32	15,5	42	44	92	16	0,25	3			330,60	161		
16,0	48			60	108	16	0,25	3					336,10	162
18,0	24	17,5	34	36	84	18	0,25	3	288,80	180				
18,0	32	17,5	42	44	92	18	0,25	3			345,10	181		
18,0	54			66	114	18	0,25	3					434,30	182
20,0	26	19,5	40	42	92	20	0,25	3	351,60	200				
20,0	38	19,5	38	54	104	20	0,25	3			401,10	201		
20,0	60			76	126	20	0,25	3					502,60	202

Steel	●	●	●
Stainless steel	●	●	●
Cast iron	○	○	○
Non ferrous metals	○	○	○
Heat resistant alloys	●	●	●
hardened materials			

→ v_c/f_z Page 292+293

SilverLine – End milling cutter with corner radius

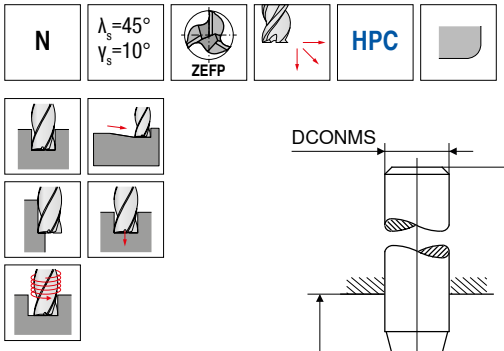

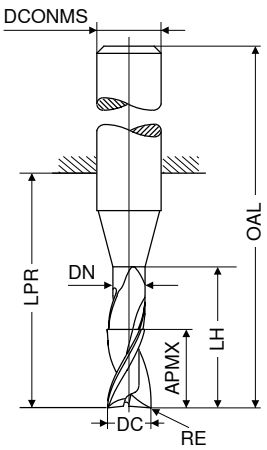

									≈DIN 6527 HB V0		≈DIN 6527 HB V0	
DC f8	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 50 952 ...		Article no. 50 952 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
4	0,5	8	3,9	15	18	54	6	3	52,90	040		
4	0,5	11	3,9	16	21	57	6	3			54,56	041
5	0,5	9	4,9	16	18	54	6	3	52,90	050		
5	0,5	13	4,9	19	21	57	6	3			54,56	051
6	0,5	10	5,9	17	18	54	6	3	54,44	060		
6	0,5	13	5,9	19	21	57	6	3			63,71	061
8	1,0	12	7,8	20	22	58	8	3	63,92	080		
8	1,0	19	7,8	25	27	63	8	3			73,07	081
10	1,0	14	9,7	24	26	66	10	3	115,80	100		
10	1,0	22	9,7	30	32	72	10	3			125,70	101
12	1,5	16	11,7	26	28	73	12	3	158,70	120		
12	1,5	26	11,7	36	38	83	12	3			169,70	121
16	2,0	22	15,5	32	34	82	16	3	325,10	160		
16	2,0	32	15,5	42	44	92	16	3			331,80	161
20	2,0	26	19,5	40	42	92	20	3	468,40	200		
20	2,0	38	19,5	52	54	104	20	3			478,40	201

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 292+293

14

SilverLine – End milling cutter

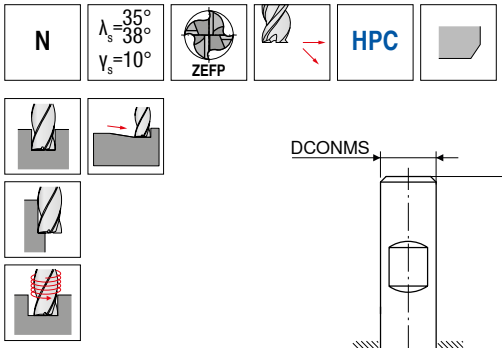

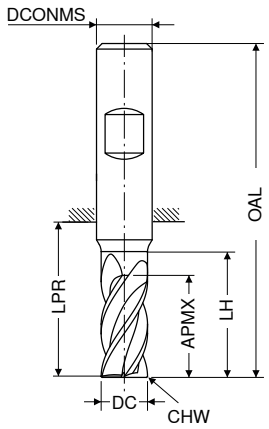

	≈DIN 6527	≈DIN 6527
	HB	HB
	V0	V0
DC f8 mm	APMX mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	Article no. 50 955 ... EUR		Article no. 50 955 ... EUR	
---	---	---	---	---	---	---	---	---	---	---	---
3,0	5	8	14	50	6	0,15	4	37,25	030		
3,0	8	11	21	57	6	0,15	4			37,25	031
3,5	8	11	18	54	6	0,15	4	37,25	035		
3,5	11	14	21	57	6	0,15	4			37,25	036
4,0	8	11	18	54	6	0,15	4	37,25	040		
4,0	11	14	21	57	6	0,15	4			37,25	041
4,5	9	12	18	54	6	0,15	4	38,24	045		
4,5	13	16	21	57	6	0,15	4			38,24	046
5,0	9	12	18	54	6	0,15	4	38,24	050		
5,0	13	16	21	57	6	0,15	4			38,24	051
5,5	10	13	18	54	6	0,15	4	36,81	055		
5,5	13	16	21	57	6	0,15	4			36,81	056
6,0	10	13	18	54	6	0,15	4	36,81	060		
6,0	13	16	21	57	6	0,15	4			36,81	061
7,0	12	15	22	58	8	0,25	4	49,26	070		
7,0	21	24	27	63	8	0,25	4			49,26	071
8,0	12	15	22	58	8	0,25	4	49,26	080		
8,0	21	24	27	63	8	0,25	4			49,26	081
9,0	14	17	26	66	10	0,25	4	64,26	090		
9,0	22	25	32	72	10	0,25	4			64,26	091
10,0	14	17	26	66	10	0,25	4	64,26	100		
10,0	22	25	32	72	10	0,25	4			64,26	101
11,0	16	19	28	73	12	0,35	4	101,60	110		
11,0	26	29	38	83	12	0,35	4			101,60	111
12,0	16	19	28	73	12	0,35	4	101,60	120		
12,0	26	29	38	83	12	0,35	4			101,60	121
14,0	16	19	28	73	14	0,35	4	130,00	140		
14,0	26	29	38	83	14	0,35	4			130,00	141
15,0	22	25	34	82	16	0,35	4	161,00	150		
15,0	36	39	44	92	16	0,35	4			161,00	151
16,0	22	25	34	82	16	0,35	4	161,00	160		
16,0	36	39	44	92	16	0,35	4			161,00	161
17,0	22	25	34	82	18	0,35	4	220,50	170		
17,0	36	39	44	92	18	0,35	4			220,50	171
18,0	22	25	34	82	18	0,35	4	220,50	180		
18,0	36	39	44	92	18	0,35	4			220,50	181
19,0	26	29	42	92	20	0,35	4	248,00	190		
19,0	41	44	54	104	20	0,35	4			248,00	191
20,0	26	29	42	92	20	0,35	4	248,00	200		
20,0	41	44	54	104	20	0,35	4			248,00	201

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 294+295

SilverLine – End milling cutter

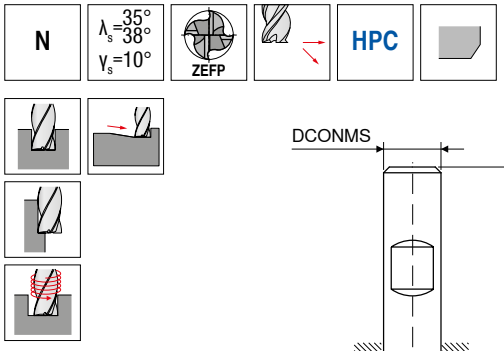

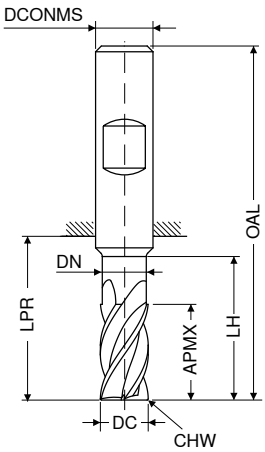

DIN 6527 | DIN 6527

HB | HB

V0 | V0

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 965 ... EUR		Article no. 50 965 ... EUR	
3	6,5	2,8	9	19	55	6	0,15	4	35,05	030		
3	6,5	2,8	15	22	58	6	0,15	4			36,70	031
4	8,5	3,8	12	19	55	6	0,15	4	35,05	040		
4	8,5	3,8	20	26	62	6	0,15	4			36,70	041
5	10,5	4,8	15	22	58	6	0,15	4	35,05	050		
5	10,5	4,8	25	34	70	6	0,15	4			36,70	051
6	13,0	5,8	18	22	58	6	0,15	4	35,05	060		
6	13,0	5,8	30	34	70	6	0,15	4			36,70	061
8	17,0	7,7	24	28	64	8	0,25	4	47,72	080		
8	17,0	7,7	40	44	80	8	0,25	4			52,46	081
10	21,0	9,7	30	34	74	10	0,25	4	69,76	100		
10	21,0	9,7	50	54	94	10	0,25	4			77,26	101
12	25,0	11,6	36	40	85	12	0,35	4	88,17	120		
12	25,0	11,6	60	64	109	12	0,35	4			96,54	121
14	29,0	13,6	42	46	91	14	0,35	4	123,50	140		
14	29,0	13,6	70	74	119	14	0,35	4			134,50	141
16	33,0	15,5	48	52	100	16	0,35	4	197,30	160		
16	33,0	15,5	80	84	132	16	0,35	4			218,30	161
18	38,0	17,5	54	58	106	18	0,35	4	250,20	180		
18	38,0	17,5	90	94	142	18	0,35	4			274,50	181
20	42,0	19,5	60	64	114	20	0,35	4	271,10	200		
20	42,0	19,5	100	104	154	20	0,35	4			298,80	201

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 294+295

14

SilverLine – End milling cutter

▲ with reinforced core Ø for increased stability





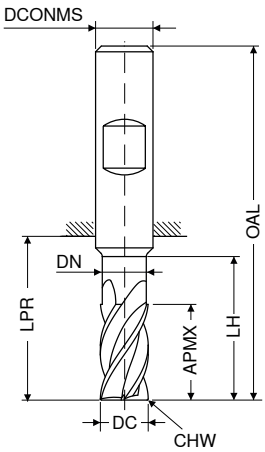

Factory standard

HB

V0

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 964 ...	EUR
4	8	3,5	12	18	54	6	0,15	4	041	52,14
5	10	4,5	15	18	54	6	0,15	4	051	52,14
6	13	5,5	21	21	57	6	0,15	4	061	54,66
8	19	7,5	27	27	63	8	0,25	4	081	62,71
10	22	9,5	32	32	72	10	0,25	4	101	107,20
12	26	11,5	38	38	83	12	0,35	4	121	149,90
14	26	13,5	38	38	83	14	0,35	4	141	206,10
16	32	15,5	44	44	92	16	0,35	4	161	271,10
18	36	17,5	44	44	92	18	0,35	4	181	302,00
20	38	19,5	54	54	104	20	0,35	4	201	391,40

Steel	●
Stainless steel	●
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	●
hardened materials	

→ v_c/f_z Page 294+295

SilverLine – End milling cutter



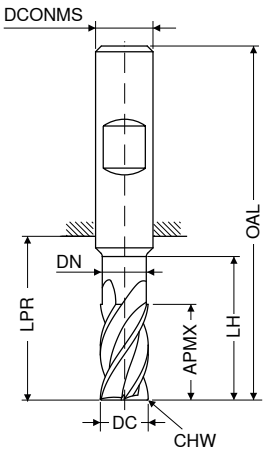

DC f8	APMX	DN	LH	LPR	OAL	DCONMS h5	CHW	ZEFP	≈DIN 6527 HB V0 Article no. 50 954 ... EUR		≈DIN 6527 HB V0 Article no. 50 954 ... EUR	
mm	mm	mm	mm	mm	mm	mm	mm					
3	5		8	14	50	6	0,15	4	51,58	030		
3	8	2,8	13	21	57	6	0,15	4			51,58	031
4	8		11	18	54	6	0,15	4	51,58	040		
4	11	3,8	17	21	57	6	0,15	4			51,58	041
5	9		12	18	54	6	0,15	4	51,58	050		
5	13	4,8	19	21	57	6	0,15	4			51,58	051
6	10		13	18	54	6	0,15	4	54,23	060		
6	13	5,8	19	21	57	6	0,15	4			54,23	061
8	12		15	22	58	8	0,25	4	55,44	080		
8	21	7,7	25	27	63	8	0,25	4			62,05	081
10	14		17	26	66	10	0,25	4	95,67	100		
10	22	9,7	30	32	72	10	0,25	4			106,70	101
12	16		19	28	73	12	0,35	4	130,00	120		
12	26	11,6	36	38	83	12	0,35	4			144,40	121
14	16		19	28	73	14	0,35	4	187,30	140		
14	26	13,6	36	38	83	14	0,35	4			205,00	141
16	22		25	34	82	16	0,35	4	203,80	160		
16	36	15,5	42	44	92	16	0,35	4			270,10	161
18	22		25	34	82	18	0,35	4	273,30	180		
18	36	17,5	42	44	92	18	0,35	4			298,80	181
20	26		29	42	92	20	0,35	4	349,30	200		
20	41	19,5	52	54	104	20	0,35	4			388,00	201

Steel	●	●
Stainless steel		
Cast iron	●	●
Non ferrous metals		
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 296+297

SilverLine – End milling cutter with corner radius

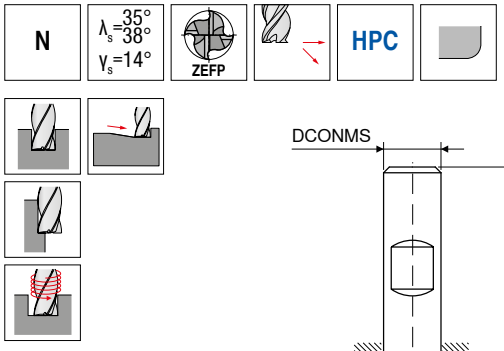

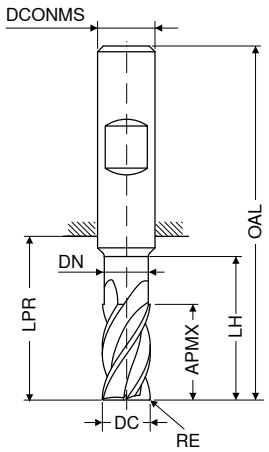

Factory standard | Factory standard

HB | HB

DC f8	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	V0 Article no. 50 968 ...		V0 Article no. 50 968 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3	0,10	8,0	2,8	13	21	57	6	4	49,16	030		
3	0,40	8,0	2,8	13	21	57	6	4	49,16	031		
3	0,50	8,0	2,8	13	21	57	6	4	49,16	032		
3	1,00	8,0	2,8	13	21	57	6	4	49,16	033		
3	0,30	6,5	2,8	15	22	58	6	4	57,64	034		
3	0,50	6,5	2,8	15	22	58	6	4	57,64	035		
3	0,80	6,5	2,8	15	22	58	6	4	57,64	036		
4	0,10	11,0	3,8	17	21	57	6	4	49,16	040		
4	0,40	11,0	3,8	17	21	57	6	4	49,16	041		
4	0,50	11,0	3,8	17	21	57	6	4	49,16	042		
4	1,00	11,0	3,8	17	21	57	6	4	49,16	043		
4	0,40	8,5	3,8	20	26	62	6	4			57,64	044
4	0,50	8,5	3,8	20	26	62	6	4			57,64	045
4	0,80	8,5	3,8	20	26	62	6	4			57,64	046
5	0,10	13,0	4,8	19	21	57	6	4	50,03	050		
5	0,50	13,0	4,8	19	21	57	6	4	50,03	051		
5	1,00	13,0	4,8	19	21	57	6	4	50,03	052		
5	0,50	10,5	4,8	25	34	70	6	4			58,74	053
5	0,80	10,5	4,8	25	34	70	6	4			58,74	054
6	0,10	13,0	5,8	19	21	57	6	4	48,71	060		
6	0,50	13,0	5,8	19	21	57	6	4	48,71	061		
6	1,00	13,0	5,8	19	21	57	6	4	48,71	062		
6	1,50	13,0	5,8	19	21	57	6	4	48,71	063		
6	0,60	13,0	5,8	30	34	70	6	4			58,74	064
6	0,80	13,0	5,8	30	34	70	6	4			58,74	065
6	1,00	13,0	5,8	30	34	70	6	4			58,74	066
8	0,15	21,0	7,7	25	27	63	8	4	61,16	080		
8	0,50	21,0	7,7	25	27	63	8	4	61,16	081		
8	1,00	21,0	7,7	25	27	63	8	4	61,16	082		
8	1,50	21,0	7,7	25	27	63	8	4	61,16	083		
8	2,00	21,0	7,7	25	27	63	8	4	61,16	084		
8	0,80	17,0	7,7	40	44	80	8	4			71,09	085
8	1,00	17,0	7,7	40	44	80	8	4			71,09	086
8	1,50	17,0	7,7	40	44	80	8	4			71,09	087
8	2,00	17,0	7,7	40	44	80	8	4			71,09	088
10	0,15	22,0	9,7	30	32	72	10	4	76,26	100		
10	0,50	22,0	9,7	30	32	72	10	4	76,26	101		
10	1,00	22,0	9,7	30	32	72	10	4	76,26	102		
10	1,50	22,0	9,7	30	32	72	10	4	76,26	103		
10	2,00	22,0	9,7	30	32	72	10	4	76,26	104		
10	0,50	21,0	9,7	50	54	94	10	4			87,72	105
10	1,00	21,0	9,7	50	54	94	10	4			87,72	106
10	1,50	21,0	9,7	50	54	94	10	4			87,72	107
10	2,00	21,0	9,7	50	54	94	10	4			87,72	108
12	0,20	26,0	11,6	36	38	83	12	4	119,10	120		
12	0,50	26,0	11,6	36	38	83	12	4	119,10	121		

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 294+295

Continued on next page

SilverLine – End milling cutter with corner radius

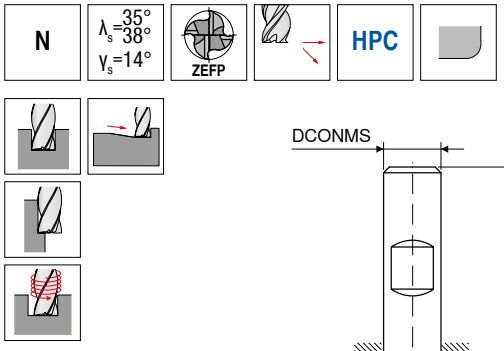

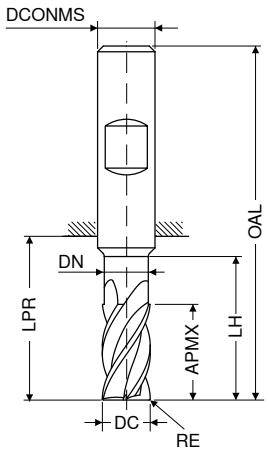

Factory standard | Factory standard

HB | HB

DC f8	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	V0 Article no. 50 968 ...		V0 Article no. 50 968 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
12	1,00	26,0	11,6	36	38	83	12	4	119,10	122		
12	1,50	26,0	11,6	36	38	83	12	4	119,10	123		
12	2,00	26,0	11,6	36	38	83	12	4	119,10	124		
12	3,00	26,0	11,6	36	38	83	12	4	119,10	131		
12	4,00	26,0	11,6	36	38	83	12	4	119,10	125		
12	0,50	25,0	11,6	60	64	109	12	4			132,30	126
12	1,00	25,0	11,6	60	64	109	12	4			132,30	127
12	1,50	25,0	11,6	60	64	109	12	4			132,30	128
12	2,00	25,0	11,6	60	64	109	12	4			132,30	129
12	3,00	25,0	11,6	60	64	109	12	4			132,30	132
12	4,00	25,0	11,6	60	64	109	12	4			132,30	130
14	0,30	26,0	13,6	36	38	83	14	4	177,50	140		
14	1,00	26,0	13,6	36	38	83	14	4	177,50	141		
14	2,00	26,0	13,6	36	38	83	14	4	177,50	142		
14	3,00	26,0	13,6	36	38	83	14	4	177,50	147		
14	4,00	26,0	13,6	36	38	83	14	4	177,50	143		
14	1,00	29,0	13,6	70	74	119	14	4			199,50	144
14	2,00	29,0	13,6	70	74	119	14	4			199,50	145
14	3,00	29,0	13,6	70	74	119	14	4			199,50	148
14	4,00	29,0	13,6	70	74	119	14	4			199,50	146
16	0,30	36,0	15,5	42	44	92	16	4	177,50	160		
16	1,00	36,0	15,5	42	44	92	16	4	177,50	161		
16	2,00	36,0	15,5	42	44	92	16	4	177,50	162		
16	3,00	36,0	15,5	42	44	92	16	4	177,50	167		
16	4,00	36,0	15,5	42	44	92	16	4	177,50	163		
16	1,00	33,0	15,5	80	84	132	16	4			219,30	164
16	2,00	33,0	15,5	80	84	132	16	4			219,30	165
16	3,00	33,0	15,5	80	84	132	16	4			219,30	168
16	4,00	33,0	15,5	80	84	132	16	4			219,30	166
18	1,00	36,0	17,5	42	44	92	18	4	237,00	180		
18	2,00	36,0	17,5	42	44	92	18	4	237,00	181		
18	3,00	36,0	17,5	42	44	92	18	4	237,00	186		
18	4,00	36,0	17,5	42	44	92	18	4	237,00	182		
18	1,00	38,0	17,5	90	94	142	18	4			265,60	183
18	2,00	38,0	17,5	90	94	142	18	4			265,60	184
18	3,00	38,0	17,5	90	94	142	18	4			265,60	187
18	4,00	38,0	17,5	90	94	142	18	4			265,60	185
20	0,30	41,0	19,5	52	54	104	20	4	267,80	200		
20	1,00	41,0	19,5	52	54	104	20	4	267,80	201		
20	2,00	41,0	19,5	52	54	104	20	4	267,80	202		
20	3,00	41,0	19,5	52	54	104	20	4	267,80	207		
20	4,00	41,0	19,5	52	54	104	20	4	267,80	203		
20	1,00	42,0	19,5	100	104	154	20	4			296,50	204
20	2,00	42,0	19,5	100	104	154	20	4			296,50	205
20	3,00	42,0	19,5	100	104	154	20	4			296,50	208
20	4,00	42,0	19,5	100	104	154	20	4			296,50	206

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 294+295

14

SilverLine – High accuracy finish milling cutter

▲ max. taper of 0.003 mm for high precision and parallelism of vertical walls
▲ Tool with cutting edge correction

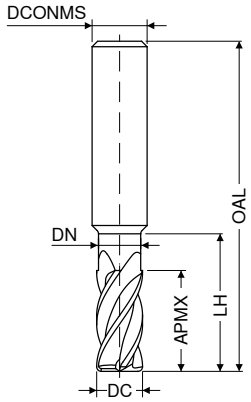

≈DIN 6527 | Factory standard

HA | HA

DC f8	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V0 Article no. 50 959 ...		V0 Article no. 50 959 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR	
6	13	5,6	19	57	6	6	56,76	060		
6	10	5,8	18	58	6	6	56,76	063		
6	13	5,8	27	67	6	6			76,81	064
6	13	5,8	36	76	6	6			95,67	065
6	15	5,6	42	80	6	6			76,81	061
8	19	7,6	25	63	8	6	65,14	080		
8	13	7,7	24	64	8	6	64,58	083		
8	17	7,7	36	76	8	6			95,34	084
8	17	7,7	48	89	8	6			119,10	085
8	20	7,6	62	100	8	6			95,34	081
10	22	9,6	30	72	10	6	111,30	100		
10	16	9,7	30	74	10	6	111,30	103		
10	21	9,7	45	89	10	6			142,30	104
10	25	9,6	58	100	10	6			143,30	101
10	21	9,7	60	104	10	6			177,50	105
12	26	11,5	36	83	12	6	152,10	120		
12	19	11,6	36	85	12	6	153,20	123		
12	25	11,6	54	103	12	6			223,80	124
12	30	11,5	73	120	12	6			222,60	121
12	25	11,6	72	121	12	6			278,80	125
16	32	15,0	42	92	16	6	283,30	160		
16	25	15,5	48	100	16	6	284,30	163		
16	33	15,5	72	124	16	6			392,40	164
16	33	15,5	96	148	16	6			491,60	165
16	40	15,0	100	150	16	6			391,40	161
20	38	19,0	52	104	20	6	410,10	200		
20	32	19,5	60	114	20	6	412,20	203		
20	42	19,5	90	144	20	6			541,10	204
20	50	19,0	98	150	20	6			540,10	201
20	42	19,5	120	174	20	6			675,70	205
25	40	24,5	75	136	25	6	515,80	253		
25	52	24,5	113	174	25	6			676,70	254
25	52	24,5	150	210	25	6			846,50	255

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 298+299

SilverLine – Ball nosed cutter

▲ Radius accuracy: ±0,01 mm

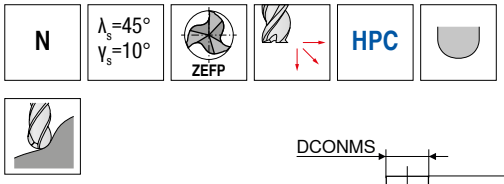

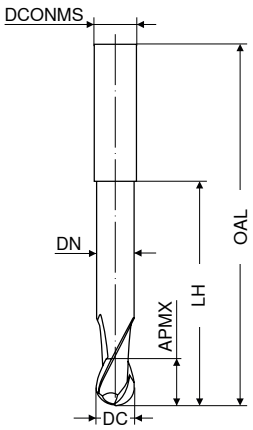

							≈DIN 6527		≈DIN 6527		
							HA		HA		
							V0		V0		
DC f8	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Article no. 50 953 ...		Article no. 50 953 ...		
mm	mm	mm	mm	mm	mm		EUR		EUR		
4	8	3,9	15	54	6	3	69,76	040			
4	11	3,9	16	57	6	3			69,76	041	
5	9	4,9	16	54	6	3	69,76	050			
5	13	4,9	19	57	6	3			69,76	051	
6	10	5,9	17	54	6	3	68,34	060			
6	13	5,9	19	57	6	3			69,76	061	
8	12	7,8	20	58	8	3	76,04	080			
8	19	7,8	25	63	8	3			80,24	081	
10	14	9,7	24	66	10	3	129,00	100			
10	22	9,7	30	72	10	3			137,80	101	
12	16	11,7	26	73	12	3	175,20	120			
12	26	11,7	36	83	12	3			187,30	121	
16	22	15,5	32	82	16	3	349,30	160			
16	36	15,5	42	92	16	3			367,00	161	
20	26	19,5	40	92	20	3	507,00	200			
20	38	19,5	52	104	20	3			526,90	201	

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 292+293

14

SilverLine – Torus face milling cutter

▲ APMX does not correspond to the maximum cutting depth
▲ r_{3D} = corner radius to be programmed

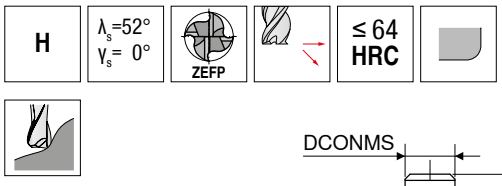

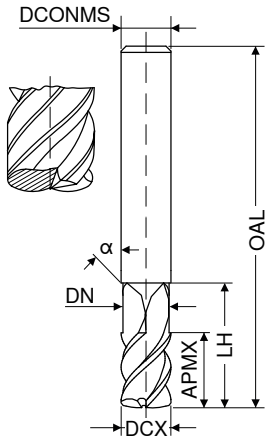

DIN 6527 | Factory standard

HA | HA

V0 | V0

DCX f8 mm	r_{3D} mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	Article no. 50 962 ... EUR		Article no. 50 962 ... EUR	
6	1,12	3	5,8	16	54	45	6	4	65,14	060		
6	1,12	3	5,8	44	80	45	6	4			86,07	061
8	1,23	4	7,7	20	58	45	8	4	73,74	080		
8	1,23	4	7,7	54	100	45	8	4			112,40	081
10	1,77	5	9,7	24	66	45	10	4	126,80	100		
10	1,77	5	9,7	60	100	45	10	4			164,20	101
12	1,86	6	11,6	26	73	45	12	4	164,20	120		
12	1,86	6	11,6	75	120	45	12	4			201,80	121
16	2,47	8	15,5	32	82	45	16	4	307,50	160		
16	2,47	8	15,5	92	150	45	16	4			384,60	161
20	2,61	10	19,5	40	92	45	20	4	448,60	200		
20	2,61	10	19,5	92	150	45	20	4			672,40	201

Steel	○	○
Stainless steel		
Cast iron	○	○
Non ferrous metals		
Heat resistant alloys		
hardened materials	●	●

→ v_c/f_z Page 300+301

SilverLine – Torus face milling cutter

▲ APMX does not correspond to the maximum cutting depth
▲ r_{3D} = corner radius to be programmed

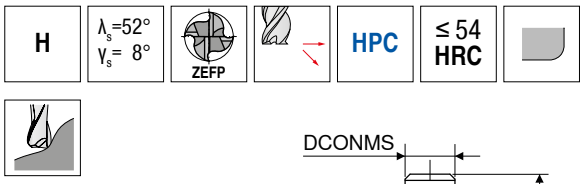

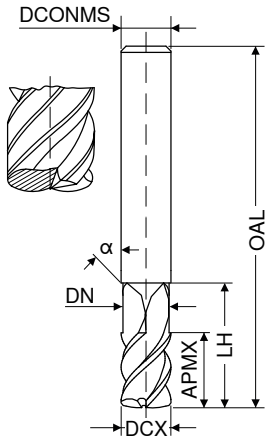

≈DIN 6527 | Factory standard

HA | HA

DCX f8 mm	r_{3D} mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	V0 Article no. 50 961 ... EUR		V0 Article no. 50 961 ... EUR	
6	1,21	3	5,8	16	54	45	6	4	65,14	060		
6	1,21	3	5,8	44	80	45	6	4			86,07	061
8	1,38	4	7,7	20	58	45	8	4	73,74	080		
8	1,38	4	7,7	54	100	45	8	4			112,40	081
10	2,00	5	9,7	24	66	45	10	4	126,80	100		
10	2,00	5	9,7	60	100	45	10	4			164,20	101
12	2,10	6	11,6	26	73	45	12	4	164,20	120		
12	2,10	6	11,6	75	120	45	12	4			201,80	121
16	2,78	8	15,5	32	82	45	16	4	307,50	160		
16	2,75	8	15,5	92	150	45	16	4			384,60	161
20	3,07	10	19,5	40	92	45	20	4	448,60	200		
20	3,07	10	19,5	92	150	45	20	4			672,40	201

Steel	●	●
Stainless steel		
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys		
hardened materials	○	○

→ v_c/f_z Page 302+303

14

S-Cut – End milling cutter

SC
UNI

λ_s=28°
γ_s=10°

ZEFP

HPC

APX72S

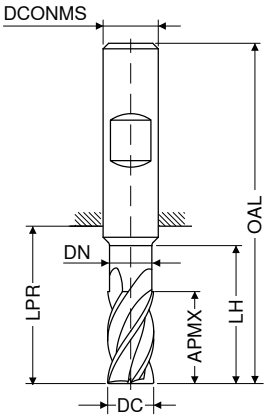

≈DIN 6527

HB

V1/1#

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 225 ... EUR	
3	8	2,8	15,0	21	57	6	4	40,56	030
4	11	3,8	16,5	21	57	6	4	40,56	040
5	13	4,8	18,5	21	57	6	4	40,56	050
6	13	5,5	21,0	21	57	6	4	40,56	060
7	19	6,5	27,0	27	63	8	4	56,10	070
8	19	7,5	27,0	27	63	8	4	54,44	080
9	22	8,5	32,0	32	72	10	4	79,68	090
10	22	9,5	32,0	32	72	10	4	77,26	100
11	26	10,5	38,0	38	83	12	4	111,30	110
12	26	11,5	38,0	38	83	12	4	107,50	120
13	26	12,5	42,0	38	83	14	4	143,30	130
14	26	13,5	42,0	38	83	14	4	138,80	140
16	36	15,5	48,0	44	92	16	4	174,10	160
18	36	17,5	54,0	52	100	18	4	233,60	180
20	38	19,5	54,0	54	104	20	4	267,80	200
25	42	24,0	65,0	65	121	25	4	425,40	250

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 304+305

S-Cut – End milling cutter

SC
UNI

λ_s=28°
36°
γ_s=10°

ZEFP

HPC

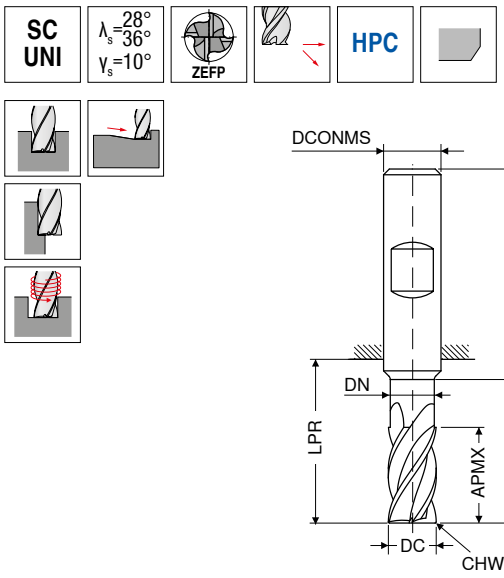

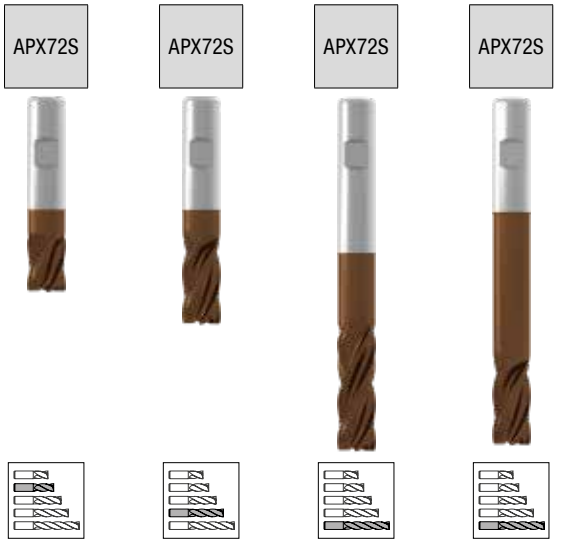

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

HB | HB | HB | HB

V1/1# | V1/1# | V1/1# | V1/1#

DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 52 223 ...		Article no. 52 224 ...		Article no. 52 226 ...		Article no. 52 227 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	6	2,8	12,0	18	54	6	0,10	4	33,51	030						
3	8	2,8	15,0	21	57	6	0,10	4			40,56	030				
4	8	3,8	13,5	18	54	6	0,13	4	33,51	040						
4	11	3,8	16,5	21	57	6	0,13	4			40,56	040				
5	9	4,8	15,5	18	54	6	0,18	4	33,51	050						
5	13	4,8	18,5	21	57	6	0,18	4			40,56	050				
5	22	4,8	24,5	27	63	6	0,18	4					49,38	050		
6	10	5,5	18,0	18	54	6	0,20	4	33,51	060						
6	13	5,5	21,0	21	57	6	0,20	4			40,56	060				
6	13	5,5	42,0	44	80	6	0,20	4							62,05	060
6	22	5,5	27,0	27	63	6	0,20	4					49,38	060		
7	12	6,5	22,0	22	58	8	0,20	4	46,96	070						
7	19	6,5	27,0	27	63	8	0,20	4			56,10	070				
8	12	7,5	22,0	22	58	8	0,20	4	45,51	080						
8	19	7,5	27,0	27	63	8	0,20	4			54,44	080				
8	21	7,5	62,0	64	100	8	0,20	4							73,40	080
8	28	7,5	36,0	44	80	8	0,20	4					60,74	080		
9	14	8,5	26,0	26	66	10	0,30	4	64,03	090						
9	22	8,5	32,0	32	72	10	0,20	4			79,68	090				
10	14	9,5	26,0	26	66	10	0,30	4	62,05	100						
10	22	9,5	32,0	32	72	10	0,30	4			77,26	100				
10	22	9,5	58,0	60	100	10	0,30	4							91,15	100
10	33	9,5	54,0	60	100	10	0,30	4					78,47	100		
11	16	10,5	28,0	28	73	12	0,30	4	95,22	110						
11	26	10,5	38,0	38	83	12	0,30	4			111,30	110				
12	16	11,5	28,0	28	73	12	0,30	4	92,36	120						
12	26	11,5	38,0	38	83	12	0,30	4			107,50	120				
12	26	11,5	73,0	75	120	12	0,30	4							113,60	120
12	42	11,5	54,0	55	100	12	0,30	4					101,30	120		
13	18	12,5	30,0	30	75	14	0,30	4	121,30	130						
13	26	12,5	38,0	38	83	14	0,30	4			143,30	130				
14	18	13,5	30,0	30	75	14	0,30	4	117,90	140						
14	26	13,5	38,0	38	83	14	0,30	4			138,80	140				
14	48	13,5	54,0	55	100	14	0,30	4					113,60	140		
16	22	15,5	34,0	34	82	16	0,40	4	147,80	160						
16	36	15,5	44,0	44	92	16	0,40	4			174,10	160				
16	36	15,5	100,0	102	150	16	0,40	4							198,30	160
16	53	15,5	84,0	102	150	16	0,40	4					186,30	160		
18	24	17,5	34,0	36	84	18	0,40	4	198,30	180						
18	36	17,5	52,0	52	100	18	0,40	4			233,60	180				
20	26	19,5	42,0	42	92	20	0,50	4	230,40	200						
20	38	19,5	54,0	54	104	20	0,50	4			267,80	200				
20	38	19,5	100,0	100	150	20	0,50	4							281,10	200
20	68	19,5	84,0	100	150	20	0,50	4					267,80	200		
25	32	24,0	46,0	49	105	25	0,50	4	363,80	250						
25	42	24,0	65,0	65	121	25	0,50	4			425,40	250				
25	68	24,0	84,0	94	150	25	0,50	4					492,70	250		

Steel	●	●	●	●
Stainless steel	●	●	●	●
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 304–307

14

S-Cut – End milling cutter

SC
UNI

λ_s=28°
γ_s=10°

ZEFP

HPC

APX72S

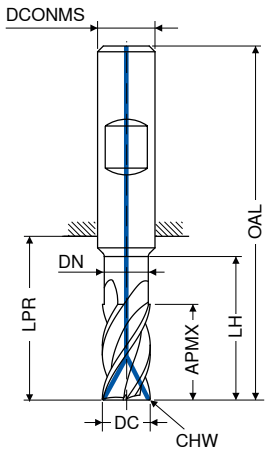

≈DIN 6527

HB

V1/1#

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	Article no. 52 229 ...	EUR
6	13	5,5	21	21	57	6	0,2	4	060	86,07
8	19	7,5	27	27	63	8	0,2	4	080	116,80
10	22	9,5	32	32	72	10	0,3	4	100	165,40
12	26	11,5	38	38	83	12	0,3	4	120	222,60
14	26	13,5	42	42	83	14	0,3	4	140	291,00
16	36	15,5	46	46	92	16	0,4	4	160	404,60
20	38	19,5	54	54	104	20	0,5	4	200	579,70
25	42	24,0	65	65	121	25	0,5	4	250	756,10

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 304+305

S-Cut – End milling cutter with corner radius

SC
UNI
λ_s=28°
γ_s=10°
ZEFP
HPC

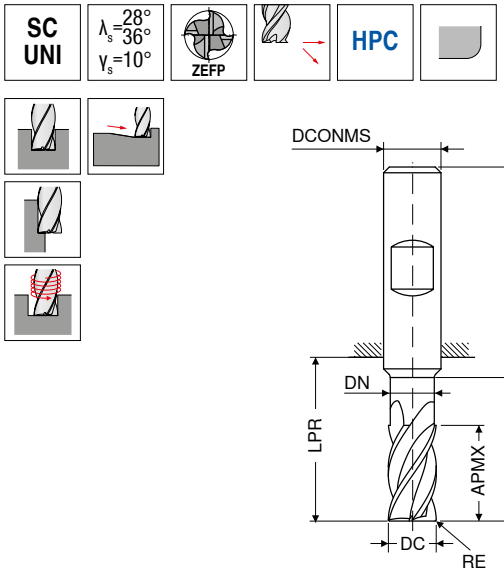

APX72S

≈DIN 6527

HB

V1/1#

DC f8	RE	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 228 ...
mm	mm	mm	mm	mm	mm	mm	mm		EUR
3	0,25	8	2,8	15,0	21	57	6	4	40,56 03003
3	0,50	8	2,8	15,0	21	57	6	4	40,56 03005
3	1,00	8	2,8	15,0	21	57	6	4	40,56 03010
4	0,25	11	3,8	16,5	21	57	6	4	40,56 04003
4	0,50	11	3,8	16,5	21	57	6	4	40,56 04005
4	1,00	11	3,8	16,5	21	57	6	4	40,56 04010
5	0,50	13	4,8	18,5	21	57	6	4	40,56 05005
5	1,00	13	4,8	18,5	21	57	6	4	40,56 05010
5	1,50	13	4,8	18,5	21	57	6	4	40,56 05015
6	0,50	13	5,5	21,0	21	57	6	4	40,56 06005
6	0,80	13	5,5	21,0	21	57	6	4	40,56 06008
6	1,00	13	5,5	21,0	21	57	6	4	40,56 06010
6	1,50	13	5,5	21,0	21	57	6	4	40,56 06015
6	2,00	13	5,5	21,0	21	57	6	4	40,56 06020
8	0,50	19	7,5	27,0	27	63	8	4	54,44 08005
8	0,80	19	7,5	27,0	27	63	8	4	54,44 08008
8	1,00	19	7,5	27,0	27	63	8	4	54,44 08010
8	1,50	19	7,5	27,0	27	63	8	4	54,44 08015
8	2,00	19	7,5	27,0	27	63	8	4	54,44 08020
10	0,50	22	9,5	32,0	32	72	10	4	77,26 10005
10	1,00	22	9,5	32,0	32	72	10	4	77,26 10010
10	1,50	22	9,5	32,0	32	72	10	4	77,26 10015
10	1,60	22	9,5	32,0	32	72	10	4	77,26 10016
10	2,00	22	9,5	32,0	32	72	10	4	77,26 10020
12	0,50	26	11,5	38,0	38	83	12	4	107,50 12005
12	1,00	26	11,5	38,0	38	83	12	4	107,50 12010
12	1,50	26	11,5	38,0	38	83	12	4	107,50 12015
12	1,60	26	11,5	38,0	38	83	12	4	107,50 12016
12	2,00	26	11,5	38,0	38	83	12	4	107,50 12020
12	3,00	26	11,5	38,0	38	83	12	4	107,50 12030
14	1,00	26	13,5	38,0	38	83	14	4	138,80 14010
14	2,00	26	13,5	38,0	38	83	14	4	138,80 14020
16	1,00	36	15,5	44,0	44	92	16	4	174,10 16010
16	1,50	36	15,5	44,0	44	92	16	4	174,10 16015
16	1,60	36	15,5	44,0	44	92	16	4	174,10 16016
16	2,00	36	15,5	44,0	44	92	16	4	174,10 16020
16	2,50	36	15,5	44,0	44	92	16	4	174,10 16025
16	3,00	36	15,5	44,0	44	92	16	4	174,10 16030
16	3,20	36	15,5	44,0	44	92	16	4	174,10 16032
18	1,50	36	17,5	44,0	44	92	18	4	233,60 18015
18	2,50	36	17,5	44,0	44	92	18	4	233,60 18025
20	1,00	38	19,5	54,0	54	104	20	4	267,80 20010

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 304+305

14

Continued on next page

S-Cut – End milling cutter with corner radius

SC
UNI

λ_s=28°
γ_s=10°

ZEFP

HPC

APX72S

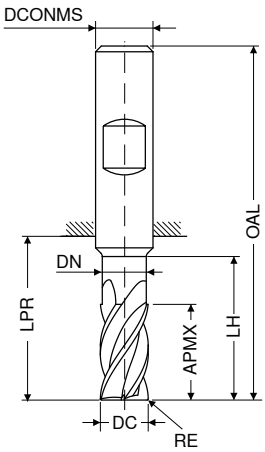

≈DIN 6527

HB

V1/1#

DC f8	RE	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 228 ...
mm	mm	mm	mm	mm	mm	mm	mm		EUR
20	1,50	38	19,5	54,0	54	104	20	4	267,80 20015
20	2,00	38	19,5	54,0	54	104	20	4	267,80 20020
20	2,50	38	19,5	54,0	54	104	20	4	267,80 20025
20	3,00	38	19,5	54,0	54	104	20	4	267,80 20030
20	4,00	38	19,5	54,0	54	104	20	4	267,80 20040
25	1,00	42	24,0	65,0	65	121	25	4	425,40 25010
25	1,50	42	24,0	65,0	65	121	25	4	425,40 25015
25	2,00	42	24,0	65,0	65	121	25	4	425,40 25020
25	2,50	42	24,0	65,0	65	121	25	4	425,40 25025
25	3,00	42	24,0	65,0	65	121	25	4	425,40 25030
25	4,00	42	24,0	65,0	65	121	25	4	425,40 25040
25	5,00	42	24,0	65,0	65	121	25	4	425,40 25050

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 304+305

S-Cut – End milling cutter

▲ suitable for trochoidal milling

SC UNI | λ_s=28° 36° γ_s=10° | ZEFP | HPC

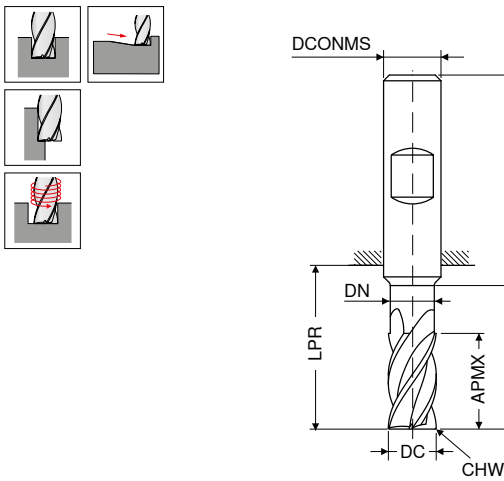

APX72S

≈DIN 6527

HB

V1/1#

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	Article no. 52 230 ... EUR	
6	18	5,5	25	26	62	6	0,12	5	60,18	**060**
8	24	7,5	30	32	68	8	0,16	5	79,68	**080**
10	30	9,5	35	40	80	10	0,20	5	101,30	**100**
12	36	11,5	45	48	93	12	0,24	5	133,30	**120**
16	48	15,5	55	60	108	16	0,32	5	228,10	**160**
20	60	19,5	70	76	126	20	0,40	5	359,30	**200**

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 308+309

BlueLine – Micro-end milling cutter

▲ T_x = maximum engagement depth

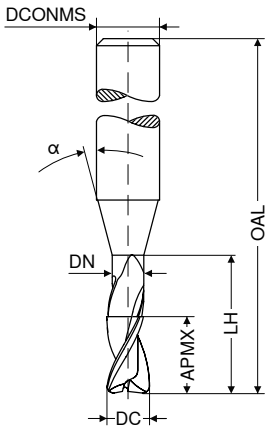

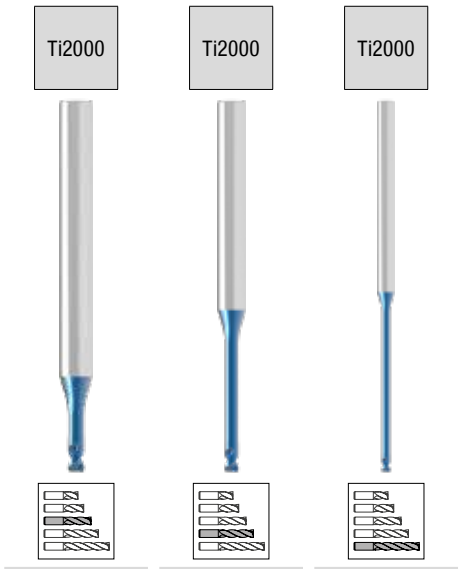

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC -0,01	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 345 ...		V1 Article no. 52 346 ...		V1 Article no. 52 347 ...	
mm	mm	mm	mm	mm		mm			EUR		EUR		EUR	
0,2	0,3	0,18	0,5	45	16	4	2,5 x DC	2	63,92	302				
0,2	0,3	0,18	1,0	45	16	4	5 x DC	2	63,92	402				
0,2	0,3	0,18	1,5	45	16	4	7,5 x DC	2	63,92	502				
0,3	0,4	0,28	1,0	45	16	4	3,3 x DC	2	61,29	303				
0,3	0,4	0,28	2,0	45	16	4	6,6 x DC	2	61,29	403				
0,3	0,4	0,28	3,0	45	16	4	10 x DC	2			61,29	303		
0,3	0,4	0,28	6,0	45	16	4	20 x DC	2			61,29	403		
0,3	0,4	0,28	9,0	45	16	4	30 x DC	2					61,29	303
0,4	0,6	0,38	2,0	45	16	4	5 x DC	2	60,39	304				
0,4	0,6	0,38	3,0	45	16	4	7,5 x DC	2	60,39	404				
0,4	0,6	0,38	4,0	45	16	4	10 x DC	2			60,39	304		
0,4	0,6	0,38	5,0	45	16	4	12,5 x DC	2			60,39	404		
0,4	0,6	0,38	8,0	45	16	4	20 x DC	2					60,39	304
0,4	0,6	0,38	12,0	45	16	4	30 x DC	2					62,26	404
0,5	0,7	0,48	2,0	45	16	4	4 x DC	2	49,16	305				
0,5	0,7	0,48	4,0	45	16	4	8 x DC	2	49,16	405				
0,5	0,7	0,48	6,0	45	16	4	12 x DC	2			49,16	305		
0,5	0,7	0,48	8,0	45	16	4	16 x DC	2			50,59	405		
0,5	0,7	0,48	10,0	50	16	4	20 x DC	2					51,69	305
0,5	0,7	0,48	15,0	50	16	4	30 x DC	2					54,23	405
0,6	0,9	0,58	2,0	45	16	4	3,3 x DC	2	49,16	306				
0,6	0,9	0,58	4,0	45	16	4	6,6 x DC	2	49,16	406				
0,6	0,9	0,58	6,0	45	16	4	10 x DC	2			49,16	306		
0,6	0,9	0,58	8,0	45	16	4	13,3 x DC	2			50,59	406		
0,6	0,9	0,58	10,0	45	16	4	16,6 x DC	2			50,59	506		
0,6	0,9	0,58	12,0	50	16	4	20 x DC	2					50,92	306
0,6	0,9	0,58	18,0	50	16	4	30 x DC	2					54,56	406
0,7	1,0	0,68	2,0	45	16	4	2,8 x DC	2	51,80	307				
0,7	1,0	0,68	4,0	45	16	4	5,7 x DC	2	51,80	407				
0,7	1,0	0,68	6,0	45	16	4	8,5 x DC	2	51,80	507				
0,7	1,0	0,68	8,0	45	16	4	11,4 x DC	2			53,24	307		
0,7	1,0	0,68	10,0	50	16	4	14,2 x DC	2			53,24	407		
0,8	1,2	0,78	4,0	45	16	4	5 x DC	2	56,43	308				
0,8	1,2	0,78	6,0	45	16	4	7,5 x DC	2	56,43	408				
0,8	1,2	0,78	8,0	45	16	4	10 x DC	2			56,43	308		
0,8	1,2	0,78	10,0	50	16	4	12,5 x DC	2			59,19	408		
0,8	1,2	0,78	12,0	50	16	4	15 x DC	2			59,19	508		
0,8	1,2	0,78	16,0	50	16	4	20 x DC	2					62,16	308
0,8	1,2	0,78	24,0	60	16	4	30 x DC	2					64,81	408
0,9	1,3	0,88	4,0	45	16	4	4,4 x DC	2	47,06	309				
0,9	1,3	0,88	6,0	45	16	4	6,6 x DC	2	47,06	409				
0,9	1,3	0,88	8,0	45	16	4	8,8 x DC	2	48,38	509				
0,9	1,3	0,88	10,0	45	16	4	11,1 x DC	2			48,38	309		
0,9	1,3	0,88	15,0	50	16	4	16,6 x DC	2			53,79	409		
1,0	1,5	0,95	4,0	45	16	4	4 x DC	2	48,38	310				
1,0	1,5	0,95	6,0	45	16	4	6 x DC	2	48,38	410				
1,0	1,5	0,95	8,0	45	16	4	8 x DC	2	48,38	510				

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 316+317

Continued on next page

BlueLine – Micro-end milling cutter

▲ T_x = maximum engagement depth

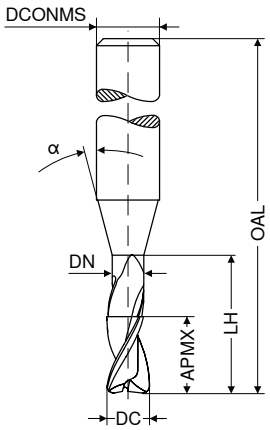

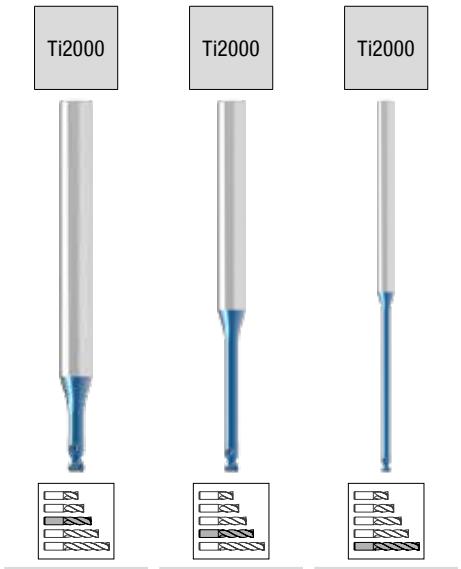

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC -0,01	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 345 ...		V1 Article no. 52 346 ...		V1 Article no. 52 347 ...	
mm	mm	mm	mm	mm		mm			EUR		EUR		EUR	
1,0	1,5	0,95	10,0	45	16	4	10 x DC	2			48,38	310		
1,0	1,5	0,95	12,0	45	16	4	12 x DC	2			49,38	410		
1,0	1,5	0,95	14,0	45	16	4	14 x DC	2			49,38	510		
1,0	1,5	0,95	16,0	50	16	4	16 x DC	2			51,69	610		
1,0	1,5	0,95	20,0	54	16	4	20 x DC	2					57,31	310
1,0	1,5	0,95	25,0	70	16	4	25 x DC	2					62,16	410
1,0	1,5	0,95	30,0	70	16	4	30 x DC	2					63,04	510
1,2	1,8	1,14	6,0	45	16	4	5 x DC	2	52,35	312				
1,2	1,8	1,14	8,0	45	16	4	6,6 x DC	2	52,35	412				
1,2	1,8	1,14	10,0	45	16	4	8,3 x DC	2	53,79	512				
1,2	1,8	1,14	12,0	45	16	4	10 x DC	2			53,79	312		
1,2	1,8	1,14	16,0	50	16	4	13,3 x DC	2			59,19	412		
1,2	1,8	1,14	20,0	60	16	4	16,6 x DC	2			60,84	512		
1,4	2,1	1,34	6,0	45	16	4	4,2 x DC	2	52,35	314				
1,4	2,1	1,34	8,0	45	16	4	5,7 x DC	2	52,35	414				
1,4	2,1	1,34	10,0	45	16	4	7,1 x DC	2	53,79	514				
1,4	2,1	1,34	12,0	45	16	4	8,5 x DC	2	53,79	614				
1,4	2,1	1,34	14,0	45	16	4	10 x DC	2			53,79	314		
1,4	2,1	1,34	16,0	50	16	4	11,4 x DC	2			59,19	414		
1,4	2,1	1,34	22,0	54	16	4	15,7 x DC	2			60,84	514		
1,5	2,3	1,44	6,0	45	16	4	4 x DC	2	50,48	315				
1,5	2,3	1,44	8,0	45	16	4	5,3 x DC	2	50,48	415				
1,5	2,3	1,44	10,0	45	16	4	6,6 x DC	2	51,14	515				
1,5	2,3	1,44	12,0	45	16	4	8 x DC	2	51,14	615				
1,5	2,3	1,44	14,0	50	16	4	9,3 x DC	2	57,21	715				
1,5	2,3	1,44	16,0	50	16	4	10,6 x DC	2			57,21	315		
1,5	2,3	1,44	18,0	54	16	4	12 x DC	2			57,21	415		
1,5	2,3	1,44	20,0	54	16	4	13,3 x DC	2			57,21	515		
1,5	2,3	1,44	25,0	70	16	4	16,6 x DC	2			62,93	615		
1,5	2,3	1,44	30,0	70	16	4	20 x DC	2			62,93	715		
1,5	2,3	1,44	35,0	70	16	4	23,3 x DC	2					63,71	315
1,5	2,3	1,44	40,0	80	16	4	26,6 x DC	2					66,68	415
1,5	2,3	1,44	45,0	80	16	4	30 x DC	2					68,11	515
1,6	2,4	1,51	6,0	45	16	4	3,7 x DC	2	50,48	316				
1,6	2,4	1,51	8,0	45	16	4	5 x DC	2	50,48	416				
1,6	2,4	1,51	10,0	45	16	4	6,2 x DC	2	51,14	516				
1,6	2,4	1,51	12,0	45	16	4	7,5 x DC	2	51,14	616				
1,6	2,4	1,51	14,0	50	16	4	8,75 x DC	2	54,01	716				
1,6	2,4	1,51	16,0	50	16	4	10 x DC	2			54,01	316		
1,6	2,4	1,51	18,0	54	16	4	11,25 x DC	2			54,01	416		
1,6	2,4	1,51	20,0	54	16	4	12,5 x DC	2			54,01	516		
1,6	2,4	1,51	26,0	60	16	4	16,2 x DC	2			62,93	616		
1,8	2,7	1,71	6,0	45	16	4	3,3 x DC	2	50,48	318				
1,8	2,7	1,71	8,0	45	16	4	4,4 x DC	2	50,48	418				
1,8	2,7	1,71	10,0	45	16	4	5,5 x DC	2	50,92	518				
1,8	2,7	1,71	12,0	45	16	4	6,6 x DC	2	51,14	618				
1,8	2,7	1,71	14,0	50	16	4	7,7 x DC	2	54,01	718				

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 316+317

14

Continued on next page

BlueLine – Micro-end milling cutter

▲ T_x = maximum engagement depth

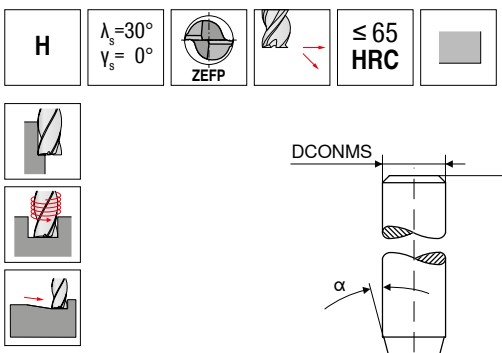

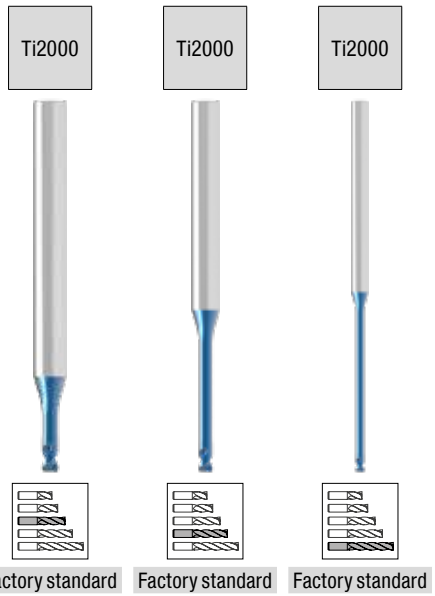

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC -0,01	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 345 ...		V1 Article no. 52 346 ...		V1 Article no. 52 347 ...	
mm	mm	mm	mm	mm		mm			EUR		EUR		EUR	
1,8	2,7	1,71	16,0	50	16	4	8,8 x DC	2	54,01	818				
1,8	2,7	1,71	18,0	54	16	4	10 x DC	2			57,21	318		
1,8	2,7	1,71	20,0	54	16	4	11,1 x DC	2			57,21	418		
1,8	2,7	1,71	25,0	60	16	4	13,8 x DC	2			62,93	518		
2,0	3,0	1,91	6,0	45	16	4	3 x DC	2	50,48	320				
2,0	3,0	1,91	8,0	45	16	4	4 x DC	2	50,48	420				
2,0	3,0	1,91	10,0	45	16	4	5 x DC	2	51,14	520				
2,0	3,0	1,91	12,0	45	16	4	6 x DC	2	51,14	620				
2,0	3,0	1,91	14,0	50	16	4	7 x DC	2	54,01	720				
2,0	3,0	1,91	16,0	50	16	4	8 x DC	2	54,01	820				
2,0	3,0	1,91	18,0	54	16	4	9 x DC	2	54,01	920				
2,0	3,0	1,91	20,0	54	16	4	10 x DC	2			57,21	320		
2,0	3,0	1,91	25,0	60	16	4	12,5 x DC	2			62,93	420		
2,0	3,0	1,91	30,0	70	16	4	15 x DC	2			64,92	520		
2,0	3,0	1,91	35,0	80	16	4	17,5 x DC	2			67,12	620		
2,0	3,0	1,91	40,0	90	16	4	20 x DC	2					72,42	320
2,0	3,0	1,91	50,0	100	16	4	25 x DC	2					77,59	420
2,0	3,0	1,91	60,0	110	16	4	30 x DC	2					88,17	520
2,5	3,7	2,41	8,0	45	16	4	3,2 x DC	2	50,48	325				
2,5	3,7	2,41	10,0	45	16	4	4 x DC	2	51,14	425				
2,5	3,7	2,41	12,0	45	16	4	4,8 x DC	2	51,14	525				
2,5	3,7	2,41	14,0	50	16	4	5,6 x DC	2	54,01	625				
2,5	3,7	2,41	16,0	50	16	4	6,4 x DC	2	54,01	725				
2,5	3,7	2,41	18,0	54	16	4	7,2 x DC	2	57,21	825				
2,5	3,7	2,41	20,0	54	16	4	8 x DC	2	57,21	925				
2,5	3,7	2,41	25,0	60	16	4	10 x DC	2			62,49	325		
2,5	3,7	2,41	30,0	70	16	4	12 x DC	2			68,22	425		
2,5	3,7	2,41	40,0	90	16	4	16 x DC	2			88,39	525		
2,5	3,7	2,41	50,0	100	16	4	20 x DC	2					98,75	325
3,0	4,5	2,92	8,0	45	16	4	2,6 x DC	2	51,14	330				
3,0	4,5	2,92	12,0	45	16	4	4 x DC	2	51,14	430				
3,0	4,5	2,92	16,0	50	16	4	5,3 x DC	2	54,01	530				
3,0	4,5	2,92	20,0	54	16	4	6,6 x DC	2	57,21	630				

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 316+317

BlueLine – Micro-ball nosed cutter

▲ T_x = maximum engagement depth

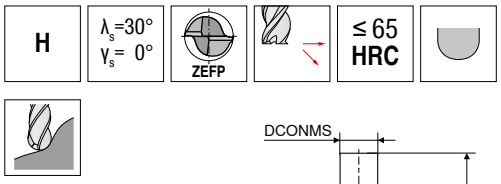

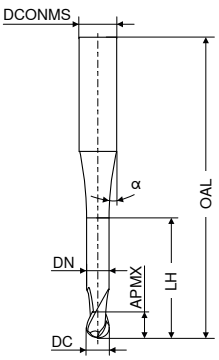

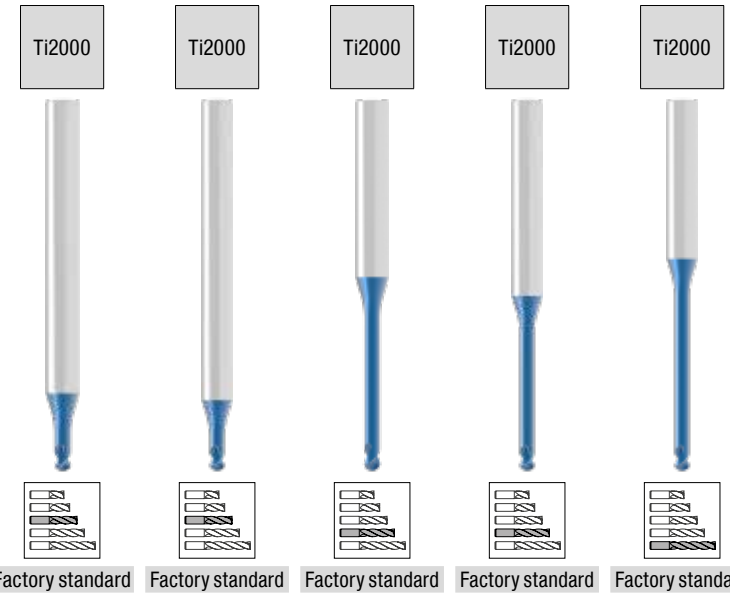

DC -0,01	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 356 ...		V1 Article no. 52 358 ...		V1 Article no. 52 357 ...		V1 Article no. 52 359 ...		V1 Article no. 52 360 ...	
mm	mm	mm	mm	mm		mm			EUR		EUR		EUR		EUR		EUR	
0,2	0,16	0,17	0,30	45	16	4	1,5 x DC	2	66,89	302								
0,2	0,16	0,17	0,50	45	16	4	2,5 x DC	2	66,89	402								
0,2	0,16	0,17	0,75	45	16	4	3,75 x DC	2	66,89	502								
0,2	0,16	0,17	1,00	45	16	4	5 x DC	2	66,89	602								
0,2	0,16	0,17	1,25	45	16	4	6,2 x DC	2	66,89	702								
0,2	0,16	0,17	1,50	45	16	4	7,5 x DC	2	66,89	802								
0,2	0,16	0,17	1,75	45	16	4	8,7 x DC	2	66,89	902								
0,2	0,16	0,17	2,00	45	16	4	10 x DC	2					66,89	302				
0,2	0,16	0,17	2,50	45	16	4	12,5 x DC	2					66,89	402				
0,2	0,16	0,17	3,00	45	16	4	15 x DC	2					66,89	502				
0,3	0,24	0,27	0,50	45	16	4	1,6 x DC	2	64,92	303								
0,3	0,24	0,27	0,75	45	16	4	2,5 x DC	2	64,92	403								
0,3	0,24	0,27	1,00	45	16	4	3,3 x DC	2	64,92	503								
0,3	0,24	0,27	1,25	45	16	4	4,1 x DC	2	64,92	603								
0,3	0,24	0,27	1,50	45	16	4	5 x DC	2	64,92	703								
0,3	0,24	0,27	1,75	50	16	4	5,8 x DC	2			64,92	303						
0,3	0,24	0,27	2,00	50	16	4	6,6 x DC	2			64,92	403						
0,3	0,24	0,27	2,25	50	16	4	7,5 x DC	2			64,92	503						
0,3	0,24	0,27	2,50	50	16	4	8,3 x DC	2			64,92	603						
0,3	0,24	0,27	2,75	50	16	4	9,1 x DC	2			64,92	703						
0,3	0,24	0,27	3,00	50	16	4	10 x DC	2							64,92	303		
0,3	0,24	0,27	3,50	50	16	4	11,6 x DC	2							64,92	403		
0,3	0,24	0,27	4,00	50	16	4	13,3 x DC	2							64,92	503		
0,3	0,24	0,27	4,50	50	16	4	15 x DC	2							64,92	603		
0,4	0,32	0,34	0,50	45	16	4	1,2 x DC	2	64,03	304								
0,4	0,32	0,34	1,00	45	16	4	2,5 x DC	2	64,03	404								
0,4	0,32	0,34	1,50	45	16	4	3,75 x DC	2	64,03	504								
0,4	0,32	0,34	2,00	45	16	4	5 x DC	2	64,03	604								
0,4	0,32	0,34	2,50	45	16	4	6,2 x DC	2	64,03	704								
0,4	0,32	0,34	3,00	45	16	4	7,5 x DC	2	64,03	804								
0,4	0,32	0,34	3,50	45	16	4	8,7 x DC	2	63,60	904								
0,4	0,32	0,34	4,00	45	16	4	10 x DC	2					63,60	304				
0,4	0,32	0,34	4,50	45	16	4	11,2 x DC	2					63,60	404				
0,4	0,32	0,34	5,00	45	16	4	12,5 x DC	2					63,60	504				
0,4	0,32	0,34	5,50	45	16	4	13,7 x DC	2					63,60	604				
0,4	0,32	0,34	6,00	45	16	4	15 x DC	2					63,60	704				
0,5	0,40	0,47	1,50	45	16	4	3 x DC	2	52,02	305								
0,5	0,40	0,47	2,00	45	16	4	4 x DC	2	52,02	405								
0,5	0,40	0,47	2,50	45	16	4	5 x DC	2	52,02	505								
0,5	0,40	0,47	3,00	45	16	4	6 x DC	2	52,02	605								
0,5	0,40	0,47	3,50	45	16	4	7 x DC	2	52,02	705								
0,5	0,40	0,47	4,00	45	16	4	8 x DC	2	52,02	805								
0,5	0,40	0,47	4,50	45	16	4	9 x DC	2	52,02	905								
0,5	0,40	0,47	5,00	45	16	4	10 x DC	2					52,02	305				

Steel	●	●	●	●	●
Stainless steel					
Cast iron					
Non ferrous metals					
Heat resistant alloys					
hardened materials	●	●	●	●	●

→ v_c/f_z Page 316+317

14

Continued on next page

BlueLine – Micro-ball nosed cutter

▲ T_x = maximum engagement depth

H | λ_s=30° γ_s= 0° | ZEFP | ≤ 65 HRC

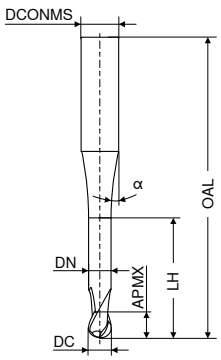

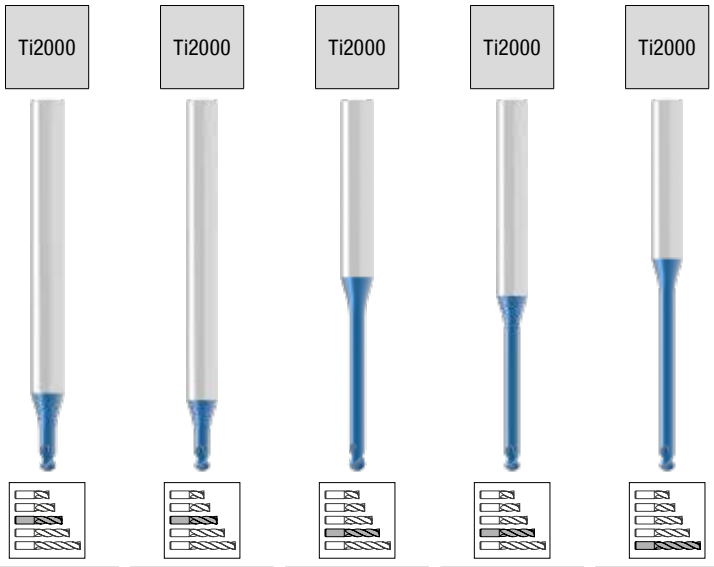

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA | HA

DC $_{-0,01}$	APMX	DN	LH	OAL	α°	DCONMS $_{h5}$	T_x	ZEFP	V1 Article no. 52 356 ...		V1 Article no. 52 358 ...		V1 Article no. 52 357 ...		V1 Article no. 52 359 ...		V1 Article no. 52 360 ...	
mm	mm	mm	mm	mm		mm			EUR		EUR		EUR		EUR		EUR	
0,5	0,40	0,47	5,50	45	16	4	11 x DC	2					52,02	405				
0,5	0,40	0,47	6,00	45	16	4	12 x DC	2					52,02	505				
0,5	0,40	0,47	7,00	45	16	4	14 x DC	2					52,02	605				
0,5	0,40	0,47	8,00	45	16	4	16 x DC	2					52,69	705				
0,5	0,40	0,47	9,00	45	16	4	18 x DC	2					52,69	805				
0,5	0,40	0,47	10,00	50	16	4	20 x DC	2									52,69	305
0,6	0,40	0,57	12,00	50	16	4	20 x DC	2									55,33	306
0,6	0,48	0,57	1,00	45	16	4	1,6 x DC	2	52,02	306								
0,6	0,48	0,57	2,00	45	16	4	3,3 x DC	2	52,02	406								
0,6	0,48	0,57	3,00	45	16	4	5 x DC	2	52,02	506								
0,6	0,48	0,57	4,00	45	16	4	6,6 x DC	2	52,02	606								
0,6	0,48	0,57	5,00	45	16	4	8,3 x DC	2	52,02	706								
0,6	0,48	0,57	6,00	45	16	4	10 x DC	2					52,02	306				
0,6	0,48	0,57	8,00	45	16	4	13,3 x DC	2					52,02	406				
0,6	0,48	0,57	10,00	50	16	4	16,6 x DC	2							54,11	306		
0,8	0,64	0,77	2,00	45	16	4	2,5 x DC	2	58,64	308								
0,8	0,64	0,77	3,00	45	16	4	3,75 x DC	2	58,64	408								
0,8	0,64	0,77	4,00	45	16	4	5 x DC	2	58,64	508								
0,8	0,64	0,77	5,00	45	16	4	6,2 x DC	2	58,64	608								
0,8	0,64	0,77	6,00	45	16	4	7,5 x DC	2	58,64	708								
0,8	0,64	0,77	7,00	45	16	4	8,7 x DC	2	58,64	808								
0,8	0,64	0,77	8,00	45	16	4	10 x DC	2					59,19	308				
0,8	0,64	0,77	9,00	45	16	4	11,2 x DC	2					59,19	408				
0,8	0,64	0,77	10,00	50	16	4	12,5 x DC	2							59,19	308		
1,0	0,80	0,96	3,00	45	16	4	3 x DC	2	49,82	310								
1,0	0,80	0,96	4,00	45	16	4	4 x DC	2	49,82	410								
1,0	0,80	0,96	5,00	45	16	4	5 x DC	2	49,82	510								
1,0	0,80	0,96	6,00	45	16	4	6 x DC	2	49,82	610								
1,0	0,80	0,96	7,00	45	16	4	7 x DC	2	53,79	710								
1,0	0,80	0,96	8,00	45	16	4	8 x DC	2	53,79	810								
1,0	0,80	0,96	9,00	45	16	4	9 x DC	2	53,79	910								
1,0	0,80	0,96	10,00	45	16	4	10 x DC	2					53,79	310				
1,0	0,80	0,96	12,00	45	16	4	12 x DC	2					53,79	410				
1,0	0,80	0,96	14,00	50	16	4	14 x DC	2							55,33	310		
1,0	0,80	0,96	16,00	50	16	4	16 x DC	2							57,53	410		
1,2	0,96	1,16	6,00	45	16	4	5 x DC	2	55,55	312								
1,2	0,96	1,16	8,00	45	16	4	6,6 x DC	2	55,55	412								
1,2	0,96	1,16	10,00	45	16	4	8,3 x DC	2	57,42	512								
1,2	0,96	1,16	12,00	45	16	4	10 x DC	2					57,42	312				
1,2	0,96	1,16	14,00	50	16	4	11,6 x DC	2							58,08	312		
1,2	0,96	1,16	16,00	50	16	4	13,3 x DC	2							58,08	412		
1,4	1,12	1,34	8,00	45	16	4	5,7 x DC	2	53,46	314								
1,4	1,12	1,34	12,00	45	16	4	8,5 x DC	2	55,55	414								
1,4	1,12	1,34	16,00	50	16	4	11,4 x DC	2							57,64	314		

Steel	●	●	●	●	●
Stainless steel					
Cast iron					
Non ferrous metals					
Heat resistant alloys					
hardened materials	●	●	●	●	●

→ v_c/f_z Page 316+317

Continued on next page

BlueLine – Micro-ball nosed cutter

▲ T_x = maximum engagement depth

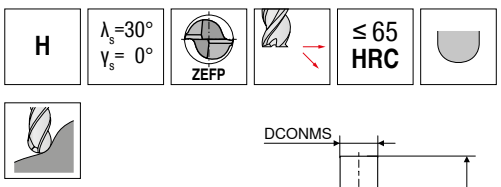

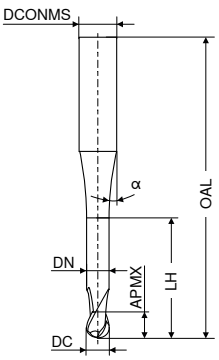

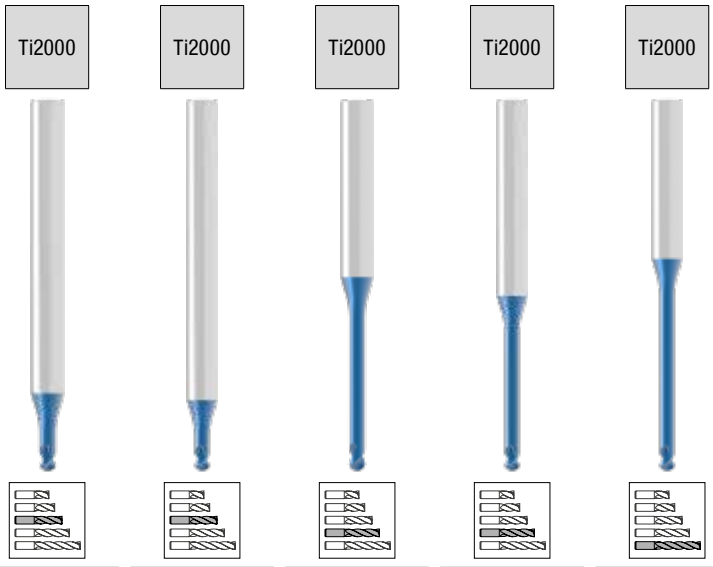

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA | HA

V1 | V1 | V1 | V1 | V1

DC -0,01	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	Article no. 52 356 ...		Article no. 52 358 ...		Article no. 52 357 ...		Article no. 52 359 ...		Article no. 52 360 ...	
mm	mm	mm	mm	mm		mm			EUR		EUR		EUR		EUR		EUR	
1,5	1,20	1,44	3,00	45	16	4	2 x DC	2	52,24	315								
1,5	1,20	1,44	4,00	45	16	4	2,6 x DC	2	52,24	415								
1,5	1,20	1,44	6,00	45	16	4	4 x DC	2	52,24	515								
1,5	1,20	1,44	8,00	45	16	4	5,3 x DC	2	52,24	615								
1,5	1,20	1,44	10,00	45	16	4	6,6 x DC	2	52,24	715								
1,5	1,20	1,44	12,00	45	16	4	8 x DC	2	55,33	815								
1,5	1,20	1,44	14,00	50	16	4	9,3 x DC	2			55,33	315						
1,5	1,20	1,44	16,00	50	16	4	10,6 x DC	2							55,33	315		
1,6	1,28	1,54	8,00	45	16	4	5 x DC	2	55,33	316								
1,6	1,28	1,54	12,00	45	16	4	7,5 x DC	2	55,33	416								
1,6	1,28	1,54	16,00	50	16	4	10 x DC	2							57,42	316		
1,8	1,44	1,74	8,00	45	16	4	4,4 x DC	2	55,33	318								
1,8	1,44	1,74	12,00	45	16	4	6,6 x DC	2	55,33	418								
1,8	1,44	1,74	16,00	50	16	4	8,8 x DC	2			57,42	318						
2,0	1,60	1,94	3,00	45	16	4	1,5 x DC	2	51,91	320								
2,0	1,60	1,94	4,00	45	16	4	2 x DC	2	51,91	420								
2,0	1,60	1,94	6,00	45	16	4	3 x DC	2	51,91	520								
2,0	1,60	1,94	8,00	45	16	4	4 x DC	2	55,33	620								
2,0	1,60	1,94	10,00	45	16	4	5 x DC	2	55,33	720								
2,0	1,60	1,94	12,00	45	16	4	6 x DC	2	55,33	820								
2,0	1,60	1,94	14,00	50	16	4	7 x DC	2			55,33	320						
2,0	1,60	1,94	16,00	50	16	4	8 x DC	2			55,33	420						
2,5	2,00	2,41	10,00	45	16	4	4 x DC	2	57,64	325								
2,5	2,00	2,41	15,00	50	16	4	6 x DC	2			59,29	325						
3,0	3,50	2,92	8,00	45	16	4	2,6 x DC	2	55,55	330								
3,0	3,50	2,92	10,00	45	16	4	3,3 x DC	2	55,55	430								
3,0	3,50	2,92	12,00	45	16	4	4 x DC	2	55,55	530								
3,0	3,50	2,92	16,00	45	16	4	5,3 x DC	2	58,31	630								
3,0	3,50	2,92	16,00	50	16	4	5,3 x DC	2			58,64	330						

Steel	●	●	●	●	●
Stainless steel					
Cast iron					
Non ferrous metals					
Heat resistant alloys					
hardened materials	●	●	●	●	●

14

→ v_c/f_z Page 316+317

BlueLine – Micro-torus cutter

▲ T_x = maximum engagement depth



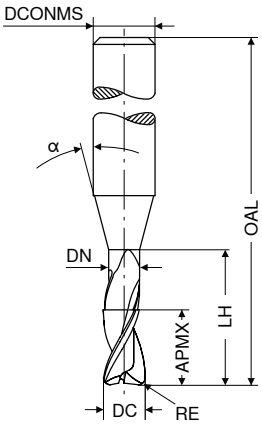

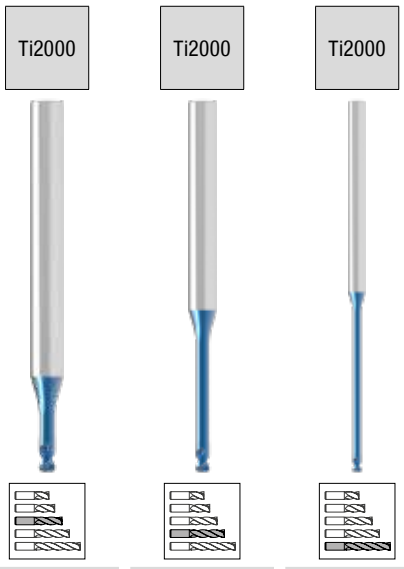

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 349 ... EUR		V1 Article no. 52 350 ... EUR		V1 Article no. 52 351 ... EUR	
mm	mm	mm	mm	mm	mm		mm								
0,4	0,1	0,4	0,38	1,0	50	16	4	2,5 x DC	2	64,03	30401				
0,4	0,1	0,4	0,38	1,5	50	16	4	3,75 x DC	2	64,03	40401				
0,4	0,1	0,4	0,38	2,0	50	16	4	5 x DC	2	64,03	50401				
0,4	0,1	0,4	0,38	3,0	50	16	4	7,5 x DC	2	64,03	60401				
0,4	0,1	0,4	0,38	4,0	50	16	4	10 x DC	2			64,03	30401		
0,5	0,1	0,5	0,48	1,0	50	16	4	2 x DC	2	52,02	30501				
0,5	0,1	0,5	0,48	2,0	50	16	4	4 x DC	2	52,02	40501				
0,5	0,1	0,5	0,48	3,0	50	16	4	6 x DC	2	52,02	50501				
0,5	0,1	0,5	0,48	4,0	50	16	4	8 x DC	2	52,02	60501				
0,5	0,1	0,5	0,48	5,0	50	16	4	10 x DC	2			52,02	30501		
0,5	0,1	0,5	0,48	6,0	50	16	4	12 x DC	2			52,02	40501		
0,6	0,1	0,6	0,58	2,0	50	16	4	3,3 x DC	2	52,02	30601				
0,6	0,1	0,6	0,58	3,0	50	16	4	5 x DC	2	52,02	40601				
0,6	0,1	0,6	0,58	4,0	50	16	4	6,6 x DC	2	52,02	50601				
0,6	0,1	0,6	0,58	6,0	50	16	4	10 x DC	2			52,02	30601		
0,6	0,1	0,6	0,58	8,0	50	16	4	13,3 x DC	2			52,02	40601		
0,7	0,1	0,7	0,68	4,0	50	16	4	5,7 x DC	2	54,89	30701				
0,7	0,1	0,7	0,68	6,0	50	16	4	8,5 x DC	2	54,89	40701				
0,8	0,1	0,8	0,78	4,0	50	16	4	5 x DC	2	58,52	30801				
0,8	0,1	0,8	0,78	6,0	50	16	4	7,5 x DC	2	58,52	40801				
0,8	0,2	0,8	0,78	4,0	50	16	4	5 x DC	2	58,64	30802				
0,8	0,2	0,8	0,78	6,0	50	16	4	7,5 x DC	2	58,64	40802				
1,0	0,1	1,0	0,95	2,0	50	16	4	2 x DC	2	49,38	31001				
1,0	0,1	1,0	0,95	4,0	50	16	4	4 x DC	2	49,38	41001				
1,0	0,1	1,0	0,95	6,0	50	16	4	6 x DC	2	53,79	51001				
1,0	0,1	1,0	0,95	8,0	50	16	4	8 x DC	2	53,79	61001				
1,0	0,1	1,0	0,95	10,0	50	16	4	10 x DC	2			53,79	31001		
1,0	0,1	1,0	0,95	12,0	54	16	4	12 x DC	2			53,79	41001		
1,0	0,1	1,0	0,95	16,0	60	16	4	16 x DC	2			70,65	51001		
1,0	0,1	1,0	0,95	20,0	60	16	4	20 x DC	2					79,02	31001
1,0	0,2	1,0	0,95	2,0	50	16	4	2 x DC	2	49,82	31002				
1,0	0,2	1,0	0,95	4,0	50	16	4	4 x DC	2	49,82	41002				
1,0	0,2	1,0	0,95	6,0	50	16	4	6 x DC	2	53,79	51002				
1,0	0,2	1,0	0,95	8,0	50	16	4	8 x DC	2	53,79	61002				
1,0	0,2	1,0	0,95	10,0	50	16	4	10 x DC	2			53,79	31002		
1,0	0,2	1,0	0,95	12,0	54	16	4	12 x DC	2			53,79	41002		
1,0	0,2	1,0	0,95	16,0	60	16	4	16 x DC	2			70,65	51002		
1,0	0,2	1,0	0,95	20,0	60	16	4	20 x DC	2					79,02	31002
1,0	0,3	1,0	0,95	2,0	50	16	4	2 x DC	2	49,82	31003				
1,0	0,3	1,0	0,95	4,0	50	16	4	4 x DC	2	49,82	41003				
1,0	0,3	1,0	0,95	6,0	50	16	4	6 x DC	2	53,68	51003				
1,0	0,3	1,0	0,95	8,0	50	16	4	8 x DC	2	53,68	61003				
1,0	0,3	1,0	0,95	10,0	50	16	4	10 x DC	2			53,68	31003		
1,0	0,3	1,0	0,95	12,0	54	16	4	12 x DC	2			53,68	41003		
1,0	0,3	1,0	0,95	16,0	60	16	4	16 x DC	2			70,65	51003		
1,0	0,3	1,0	0,95	20,0	60	16	4	20 x DC	2					79,02	31003
1,2	0,2	1,2	1,14	6,0	50	16	4	5 x DC	2	55,55	31202				

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 316+317

Continued on next page

BlueLine – Micro-torus cutter

▲ T_x = maximum engagement depth

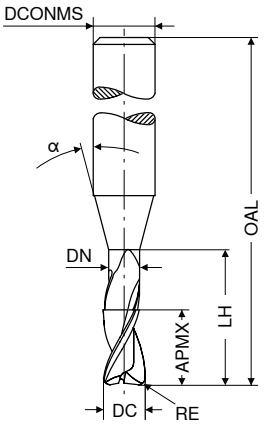

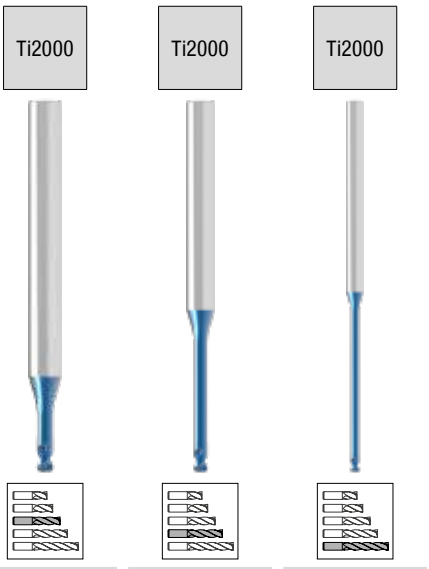

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 349 ...		V1 Article no. 52 350 ...		V1 Article no. 52 351 ...	
mm	mm	mm	mm	mm	mm		mm			EUR		EUR		EUR	
1,2	0,2	1,2	1,14	12,0	54	16	4	10 x DC	2			55,55	31202		
1,2	0,2	1,2	1,14	20,0	60	16	4	16,6 x DC	2			83,21	41202		
1,2	0,3	1,2	1,14	6,0	50	16	4	5 x DC	2	55,55	31203				
1,2	0,3	1,2	1,14	12,0	54	16	4	10 x DC	2			55,55	31203		
1,2	0,3	1,2	1,14	20,0	60	16	4	16,6 x DC	2			83,21	41203		
1,5	0,2	1,5	1,44	4,0	50	16	4	2,6 x DC	2	52,24	31502				
1,5	0,2	1,5	1,44	6,0	50	16	4	4 x DC	2	52,24	41502				
1,5	0,2	1,5	1,44	8,0	50	16	4	5,3 x DC	2	55,33	51502				
1,5	0,2	1,5	1,44	10,0	50	16	4	6,6 x DC	2	55,33	61502				
1,5	0,2	1,5	1,44	12,0	54	16	4	8 x DC	2	55,33	71502				
1,5	0,2	1,5	1,44	16,0	54	16	4	10,6 x DC	2			55,33	31502		
1,5	0,2	1,5	1,44	20,0	60	16	4	13,3 x DC	2			55,33	41502		
1,5	0,3	1,5	1,44	4,0	50	16	4	2,6 x DC	2	52,24	31503				
1,5	0,3	1,5	1,44	6,0	50	16	4	4 x DC	2	52,24	41503				
1,5	0,3	1,5	1,44	8,0	50	16	4	5,3 x DC	2	55,33	51503				
1,5	0,3	1,5	1,44	10,0	50	16	4	6,6 x DC	2	55,33	61503				
1,5	0,3	1,5	1,44	12,0	54	16	4	8 x DC	2	55,33	71503				
1,5	0,3	1,5	1,44	16,0	54	16	4	10,6 x DC	2			55,33	31503		
1,5	0,3	1,5	1,44	20,0	60	16	4	13,3 x DC	2			55,33	41503		
1,5	0,5	1,5	1,44	4,0	50	16	4	2,6 x DC	2	52,24	31505				
1,5	0,5	1,5	1,44	6,0	50	16	4	4 x DC	2	52,24	41505				
1,5	0,5	1,5	1,44	8,0	50	16	4	5,3 x DC	2	52,24	51505				
1,5	0,5	1,5	1,44	10,0	50	16	4	6,6 x DC	2	52,24	61505				
1,5	0,5	1,5	1,44	12,0	54	16	4	8 x DC	2	52,24	71505				
1,5	0,5	1,5	1,44	16,0	54	16	4	10,6 x DC	2			52,24	31505		
1,5	0,5	1,5	1,44	20,0	60	16	4	13,3 x DC	2			52,24	41505		
2,0	0,1	2,0	1,91	4,0	50	16	4	2 x DC	2	51,91	32001				
2,0	0,1	2,0	1,91	6,0	50	16	4	3 x DC	2	51,91	42001				
2,0	0,1	2,0	1,91	8,0	50	16	4	4 x DC	2	55,33	52001				
2,0	0,1	2,0	1,91	10,0	50	16	4	5 x DC	2	55,33	62001				
2,0	0,1	2,0	1,91	12,0	54	16	4	6 x DC	2	55,33	72001				
2,0	0,1	2,0	1,91	16,0	54	16	4	8 x DC	2	55,33	82001				
2,0	0,1	2,0	1,91	20,0	60	16	4	10 x DC	2			55,33	32001		
2,0	0,1	2,0	1,91	26,0	70	16	4	13 x DC	2			55,33	42001		
2,0	0,2	2,0	1,91	4,0	50	16	4	2 x DC	2	51,91	32002				
2,0	0,2	2,0	1,91	6,0	50	16	4	3 x DC	2	51,91	42002				
2,0	0,2	2,0	1,91	8,0	50	16	4	4 x DC	2	55,33	52002				
2,0	0,2	2,0	1,91	10,0	50	16	4	5 x DC	2	55,33	62002				
2,0	0,2	2,0	1,91	12,0	54	16	4	6 x DC	2	55,33	72002				
2,0	0,2	2,0	1,91	16,0	54	16	4	8 x DC	2	55,33	82002				
2,0	0,2	2,0	1,91	20,0	60	16	4	10 x DC	2			55,33	32002		
2,0	0,2	2,0	1,91	26,0	70	16	4	13 x DC	2			55,33	42002		
2,0	0,3	2,0	1,91	4,0	50	16	4	2 x DC	2	51,91	32003				
2,0	0,3	2,0	1,91	6,0	50	16	4	3 x DC	2	51,91	42003				
2,0	0,3	2,0	1,91	8,0	50	16	4	4 x DC	2	51,91	52003				
2,0	0,3	2,0	1,91	10,0	50	16	4	5 x DC	2	55,33	62003				
2,0	0,3	2,0	1,91	12,0	54	16	4	6 x DC	2	55,33	72003				

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 316+317

14

Continued on next page

BlueLine – Micro-torus cutter

▲ T_x = maximum engagement depth

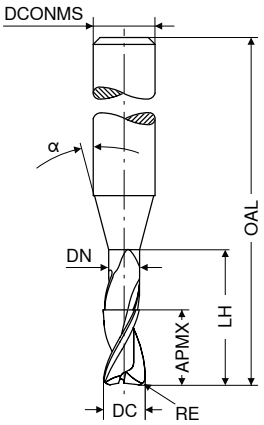

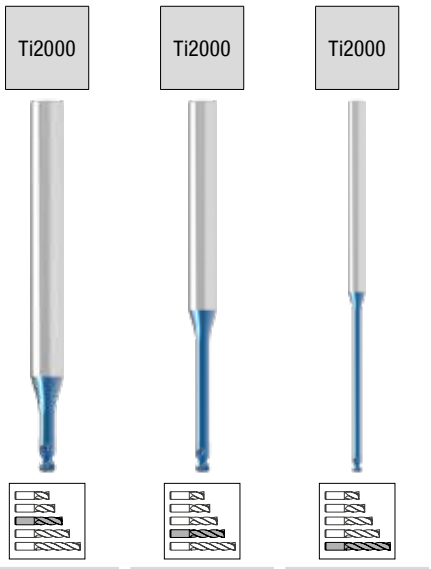

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 349 ...		V1 Article no. 52 350 ...		V1 Article no. 52 351 ...	
mm	mm	mm	mm	mm	mm		mm			EUR		EUR		EUR	
2,0	0,3	2,0	1,91	16,0	54	16	4	8 x DC	2	55,33	82003				
2,0	0,3	2,0	1,91	20,0	60	16	4	10 x DC	2			55,33	32003		
2,0	0,3	2,0	1,91	26,0	70	16	4	13 x DC	2			55,33	42003		
2,0	0,5	2,0	1,91	4,0	50	16	4	2 x DC	2	51,91	32005				
2,0	0,5	2,0	1,91	6,0	50	16	4	3 x DC	2	51,91	42005				
2,0	0,5	2,0	1,91	8,0	50	16	4	4 x DC	2	55,33	52005				
2,0	0,5	2,0	1,91	10,0	50	16	4	5 x DC	2	55,33	62005				
2,0	0,5	2,0	1,91	12,0	54	16	4	6 x DC	2	55,33	72005				
2,0	0,5	2,0	1,91	16,0	54	16	4	8 x DC	2	55,33	82005				
2,0	0,5	2,0	1,91	20,0	60	16	4	10 x DC	2			55,33	32005		
2,0	0,5	2,0	1,91	26,0	70	16	4	13 x DC	2			55,33	42005		
2,5	0,3	2,5	2,41	10,0	50	16	4	4 x DC	2	57,64	32503				
2,5	0,3	2,5	2,41	12,0	60	16	4	4,8 x DC	2	59,29	42503				
2,5	0,3	2,5	2,41	30,0	70	16	4	12 x DC	2			61,16	32503		
2,5	0,5	2,5	2,41	10,0	50	16	4	4 x DC	2	57,64	32505				
2,5	0,5	2,5	2,41	12,0	60	16	4	4,8 x DC	2	57,64	42505				
2,5	0,5	2,5	2,41	30,0	70	16	4	12 x DC	2			61,16	32505		
3,0	0,3	3,0	2,92	10,0	50	16	4	3,3 x DC	2	54,66	33003				
3,0	0,3	3,0	2,92	12,0	50	16	4	4 x DC	2	55,44	43003				
3,0	0,3	3,0	2,92	30,0	70	16	4	10 x DC	2			74,29	33003		
3,0	0,5	3,0	2,92	10,0	50	16	4	3,3 x DC	2	54,66	33005				
3,0	0,5	3,0	2,92	12,0	50	16	4	4 x DC	2	55,33	43005				
3,0	0,5	3,0	2,92	30,0	70	16	4	10 x DC	2			74,29	33005		

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 316+317

BlueLine – Micro-torus cutter

▲ T_x = maximum engagement depth

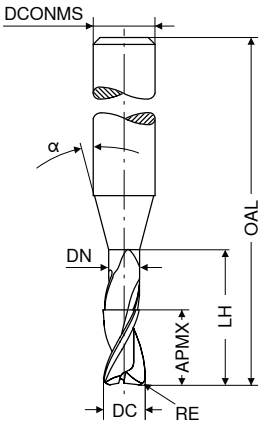

Factory standard

DC -0,008	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 362 ...
mm	mm	mm	mm	mm	mm		mm			EUR
0,6	0,1	0,6	0,58	2	50	16	4	3,3 x DC	2	52,02 30601
0,6	0,1	0,6	0,58	3	50	16	4	5 x DC	2	52,02 40601
0,6	0,1	0,6	0,58	4	50	16	4	6,6 x DC	2	52,02 50601
1,0	0,1	1,0	0,95	2	50	16	4	2 x DC	2	49,82 31001
1,0	0,1	1,0	0,95	4	50	16	4	4 x DC	2	49,82 41001
1,0	0,1	1,0	0,95	6	50	16	4	6 x DC	2	53,79 51001
1,0	0,2	1,0	0,95	2	50	16	4	2 x DC	2	49,82 31002
1,0	0,2	1,0	0,95	4	50	16	4	4 x DC	2	49,82 41002
1,0	0,2	1,0	0,95	6	50	16	4	6 x DC	2	53,68 51002
1,0	0,3	1,0	0,95	2	50	16	4	2 x DC	2	49,82 31003
1,0	0,3	1,0	0,95	4	50	16	4	4 x DC	2	49,82 41003
1,0	0,3	1,0	0,95	6	50	16	4	6 x DC	2	53,79 51003
2,0	0,1	2,0	1,91	4	50	16	4	2 x DC	2	51,91 32001
2,0	0,1	2,0	1,91	6	50	16	4	3 x DC	2	51,91 42001
2,0	0,1	2,0	1,91	8	50	16	4	4 x DC	2	55,33 52001
2,0	0,1	2,0	1,91	10	50	16	4	5 x DC	2	55,33 62001
2,0	0,1	2,0	1,91	12	54	16	4	6 x DC	2	55,33 72001
2,0	0,2	2,0	1,91	4	50	16	4	2 x DC	2	51,91 32002
2,0	0,2	2,0	1,91	6	50	16	4	3 x DC	2	51,91 42002
2,0	0,2	2,0	1,91	8	50	16	4	4 x DC	2	55,33 52002
2,0	0,2	2,0	1,91	10	50	16	4	5 x DC	2	55,33 62002
2,0	0,2	2,0	1,91	12	54	16	4	6 x DC	2	55,33 72002
2,0	0,3	2,0	1,91	4	50	16	4	2 x DC	2	51,91 32003
2,0	0,3	2,0	1,91	6	50	16	4	3 x DC	2	51,91 42003
2,0	0,3	2,0	1,91	8	50	16	4	4 x DC	2	55,33 52003
2,0	0,3	2,0	1,91	10	50	16	4	5 x DC	2	55,33 62003
2,0	0,3	2,0	1,91	12	54	16	4	6 x DC	2	55,33 72003
2,0	0,5	2,0	1,91	4	50	16	4	2 x DC	2	51,91 32005
2,0	0,5	2,0	1,91	6	50	16	4	3 x DC	2	51,91 42005
2,0	0,5	2,0	1,91	8	50	16	4	4 x DC	2	55,33 52005
2,0	0,5	2,0	1,91	10	50	16	4	5 x DC	2	55,33 62005
2,0	0,5	2,0	1,91	12	54	16	4	6 x DC	2	55,33 72005

Steel	●
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 316+317

14

BlueLine – End milling cutter

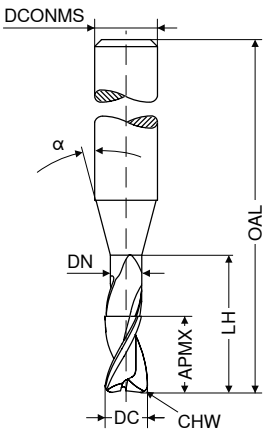

Ti2000

Factory standard

HA

V1

DC e8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	CHW mm	ZEFP	Article no. 52 344 ... EUR	
0,5	1,5			58	12	6	0,02	2	41,01	**905**
1,0	3,0			58	12	6	0,02	2	41,01	**010**
1,5	4,0			58	12	6	0,03	2	41,01	**015**
2,0	5,0	1,8	12	58	20	6	0,03	2	41,01	**020**
2,5	6,0	2,3	13	58	20	6	0,04	2	41,01	**025**
3,0	8,0	2,8	15	58	20	6	0,04	2	41,01	**030**
3,5	8,0	3,3	15	58	20	6	0,05	2	41,01	**035**
4,0	11,0	3,8	15	58	20	6	0,05	2	41,01	**040**
5,0	13,0	4,8	21	58	20	6	0,06	2	41,01	**050**
6,0	16,0	5,8	24	58		6	0,07	2	41,01	**060**
8,0	19,0	7,8	27	64		8	0,08	2	53,79	**080**
10,0	22,0	9,8	32	73		10	0,10	2	81,99	**100**
12,0	26,0	11,8	38	84		12	0,13	2	107,40	**120**
16,0	32,0	15,7	44	93		16	0,18	2	184,10	**160**
20,0	38,0	19,7	54	104		20	0,20	2	282,20	**200**

Steel	●
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 314+315

BlueLine – End milling cutter with corner radius



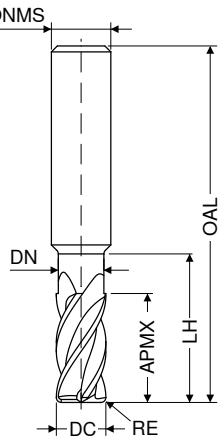

Factory standard

Factory standard

HA

HA

DC e8	RE ±0,005	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V1 Article no. 52 353 ...		V1 Article no. 52 354 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
1	0,10	1,5	0,85	10	50	3	4	49,26	31001		
1	0,10	1,5	0,85	20	75	3	4			70,76	31001
1	0,20	1,5	0,85	10	50	3	4	49,60	31002		
1	0,20	1,5	0,85	20	75	3	4			70,76	31002
2	0,20	2,5	1,80	12	50	3	4	48,83	32002		
2	0,20	2,5	1,80	25	75	3	4			69,66	32002
2	0,30	2,5	1,80	12	50	3	4	48,83	32003		
2	0,30	2,5	1,80	25	75	3	4			69,66	32003
2	0,50	2,5	1,80	12	50	3	4	48,83	32005		
2	0,50	2,5	1,80	25	75	3	4			69,66	32005
3	0,25	4,0	2,70	14	50	3	4	46,40	33002		
3	0,25	4,0	2,70	32	75	3	4			66,02	33002
3	0,30	4,0	2,70	14	50	3	4	46,40	33003		
3	0,30	4,0	2,70	32	75	3	4			66,02	33003
3	0,50	4,0	2,70	14	50	3	4	46,40	33005		
3	0,50	4,0	2,70	32	75	3	4			66,02	33005
3	1,00	4,0	2,70	14	50	3	4	46,40	33010		
3	1,00	4,0	2,70	32	75	3	4			66,02	33010
4	0,20	5,0	3,70	16	50	4	4	49,82	44002		
4	0,20	5,0	3,70	36	75	4	4			71,53	44002
4	0,25	5,0	3,70	16	50	4	4	49,82	44003		
4	0,25	5,0	3,70	36	75	4	4			71,53	44003
4	0,40	5,0	3,70	16	50	4	4	49,82	44004		
4	0,40	5,0	3,70	36	75	4	4			71,53	44004
4	0,50	5,0	3,70	16	50	4	4	49,82	44005		
4	0,50	5,0	3,70	36	75	4	4			71,53	44005
4	1,00	5,0	3,70	16	50	4	4	49,82	44010		
4	1,00	5,0	3,70	36	75	4	4			71,53	44010
5	0,25	6,0	4,60	18	54	5	4	54,01	55002		
5	0,25	6,0	4,60	40	75	5	4			79,80	55002
5	0,50	6,0	4,60	18	54	5	4	54,01	55005		
5	0,50	6,0	4,60	40	75	5	4			79,80	55005
5	1,00	6,0	4,60	18	54	5	4	54,01	55010		
5	1,00	6,0	4,60	40	75	5	4			79,80	55010
6	0,25	7,0	5,50	21	58	6	4	61,16	06002		
6	0,25	7,0	5,50	44	80	6	4			86,41	06002
6	0,50	7,0	5,50	21	58	6	4	61,16	06005		
6	0,50	7,0	5,50	44	80	6	4			86,41	06005
6	0,80	7,0	5,50	21	58	6	4	61,16	06008		
6	1,00	7,0	5,50	21	58	6	4	61,16	06010		
6	1,00	7,0	5,50	44	80	6	4			86,41	06010
6	1,50	7,0	5,50	21	58	6	4	61,16	06015		
6	1,50	7,0	5,50	44	80	6	4			86,41	06015
6	2,00	7,0	5,50	21	58	6	4	61,16	06020		
8	0,25	9,0	7,40	27	64	8	4	80,57	08002		

Steel	●	●
Stainless steel		
Cast iron		
Non ferrous metals		
Heat resistant alloys		
hardened materials	●	●

→ v_c/f_z Page 314+315

14

Continued on next page

BlueLine – End milling cutter with corner radius



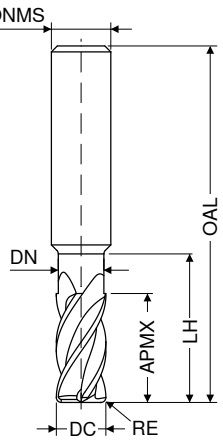

Factory standard

Factory standard

HA

HA

DC e8	RE ±0,005	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V1 Article no. 52 353 ...		V1 Article no. 52 354 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
8	0,25	9,0	7,40	54	100	8	4			117,90	08002
8	0,50	9,0	7,40	27	64	8	4	80,57	08005		
8	0,50	9,0	7,40	54	100	8	4			117,90	08005
8	0,80	9,0	7,40	27	64	8	4	80,57	08008		
8	0,80	9,0	7,40	54	100	8	4			117,90	08008
8	1,00	9,0	7,40	27	64	8	4	80,57	08010		
8	1,00	9,0	7,40	54	100	8	4			117,90	08010
8	1,50	9,0	7,40	27	64	8	4	80,57	08015		
8	1,50	9,0	7,40	54	100	8	4			117,90	08015
8	2,00	9,0	7,40	27	64	8	4	80,57	08020		
8	2,00	9,0	7,40	54	100	8	4			117,90	08020
8	2,50	9,0	7,40	27	64	8	4	80,57	08025		
8	3,00	9,0	7,40	27	64	8	4	80,57	08030		
8	3,00	9,0	7,40	54	100	8	4			117,90	08030
10	0,25	11,0	9,20	32	73	10	4	105,10	10002		
10	0,25	11,0	9,20	60	100	10	4			161,00	10002
10	0,50	11,0	9,20	32	73	10	4	105,10	10005		
10	0,50	11,0	9,20	60	100	10	4			161,00	10005
10	0,80	11,0	9,20	32	73	10	4	105,10	10008		
10	0,80	11,0	9,20	60	100	10	4			161,00	10008
10	1,00	11,0	9,20	32	73	10	4	105,10	10010		
10	1,00	11,0	9,20	60	100	10	4			161,00	10010
10	1,50	11,0	9,20	32	73	10	4	105,10	10015		
10	1,50	11,0	9,20	60	100	10	4			161,00	10015
10	2,00	11,0	9,20	32	73	10	4	105,10	10020		
10	2,00	11,0	9,20	60	100	10	4			161,00	10020
10	3,00	11,0	9,20	32	73	10	4	105,10	10030		
10	3,00	11,0	9,20	60	100	10	4			161,00	10030
10	3,50	11,0	9,20	32	73	10	4	105,10	10035		
12	0,50	12,0	11,00	38	84	12	4	142,30	12005		
12	0,50	12,0	11,00	75	120	12	4			212,80	12005
12	1,00	12,0	11,00	38	84	12	4	142,30	12010		
12	1,00	12,0	11,00	75	120	12	4			212,80	12010
12	1,50	12,0	11,00	38	84	12	4	142,30	12015		
12	1,50	12,0	11,00	75	120	12	4			212,80	12015
12	2,00	12,0	11,00	38	84	12	4	142,30	12020		
12	2,00	12,0	11,00	75	120	12	4			212,80	12020
12	3,00	12,0	11,00	38	84	12	4	142,30	12030		
12	3,00	12,0	11,00	75	120	12	4			212,80	12030
16	2,00	16,0	15,00	44	93	16	4	240,20	16020		
16	2,00	16,0	15,00	92	150	16	4			360,40	16020
16	3,00	16,0	15,00	44	93	16	4	240,20	16030		
16	3,00	16,0	15,00	92	150	16	4			360,40	16030

Steel	●	●
Stainless steel		
Cast iron		
Non ferrous metals		
Heat resistant alloys		
hardened materials	●	●

→ v_c/f_z Page 314+315

BlueLine – End milling cutter with corner radius

▲ with decreasing helix angle for reduced machining noise & vibration

H | λ_s=30° γ_s=45° γ_s=10° | ZEFP | 54–70 HRC



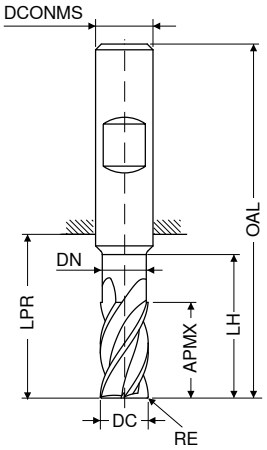

Factory standard | Factory standard

HA | HB

DC e8	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1 Article no. 52 140 ...		V1 Article no. 52 141 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3	0,3	4	2,7	14	22	50	3	4	58,31	031		
3	0,5	4	2,7	14	22	50	3	4	58,31	033		
3	1,0	4	2,7	14	22	50	3	4	58,31	034		
4	0,4	5	3,7	16	22	50	4	4	62,93	042		
4	0,5	5	3,7	16	22	50	4	4	62,93	043		
4	1,0	5	3,7	16	22	50	4	4	62,93	044		
5	0,5	6	4,6	18	26	54	5	4	66,02	053		
5	1,0	6	4,6	18	26	54	5	4	66,02	054		
6	0,5	7	5,5	21	21	57	6	6	82,33	063	82,33	063
6	1,0	7	5,5	21	21	57	6	6	82,33	064	82,33	064
6	1,5	7	5,5	21	21	57	6	6	82,33	065	82,33	065
8	0,5	9	7,4	27	27	63	8	6	108,70	083	108,70	083
8	1,0	9	7,4	27	27	63	8	6	108,70	084	108,70	084
8	1,5	9	7,4	27	27	63	8	6	108,70	085	108,70	085
8	2,0	9	7,4	27	27	63	8	6	108,70	086	108,70	086
10	0,5	11	9,2	32	32	72	10	6	140,00	103	140,00	103
10	1,0	11	9,2	32	32	72	10	6	140,00	104	140,00	104
10	1,5	11	9,2	32	32	72	10	6	140,00	105	140,00	105
10	2,0	11	9,2	32	32	72	10	6	140,00	106	140,00	106
12	0,5	12	11,0	38	38	83	12	6	189,60	123	189,60	123
12	1,0	12	11,0	38	38	83	12	6	189,60	124	189,60	124
12	1,5	12	11,0	38	38	83	12	6	189,60	125	189,60	125
12	2,0	12	11,0	38	38	83	12	6	189,60	126	189,60	126
16	1,0	16	15,0	44	45	93	16	6	321,90	161	321,90	161
16	2,0	16	15,0	44	45	93	16	6	321,90	163	321,90	163
20	1,0	20	18,5	50	54	104	20	6	453,00	201	453,00	201
20	2,5	20	18,5	50	54	104	20	6	453,00	204	453,00	204

Steel	○	○
Stainless steel		
Cast iron		
Non ferrous metals		
Heat resistant alloys		
hardened materials	●	●

→ v_c/f_z Page 310+311

14

BlueLine – Finish milling cutter

▲ with decreasing helix angle for reduced machining noise & vibration

H | λ_s=30° γ_s= 0° | ZEFP | 54–70 HRC

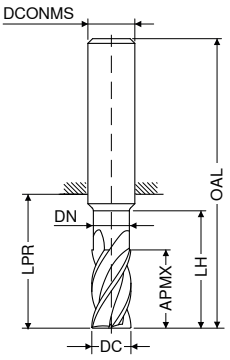

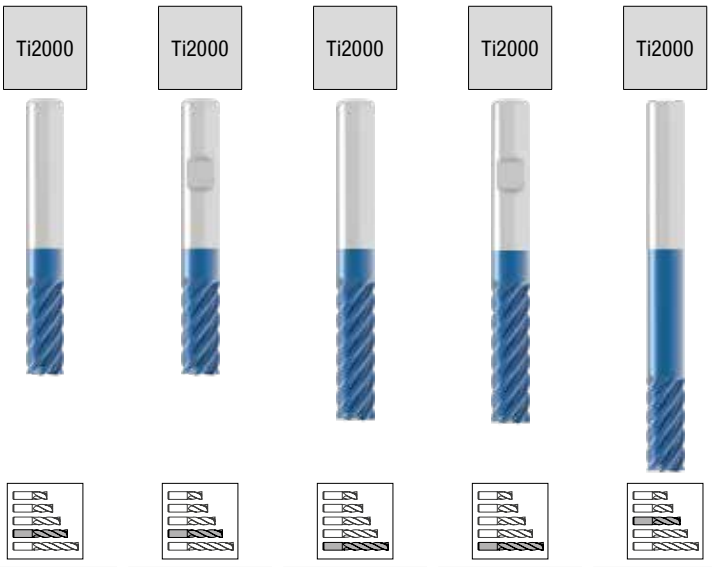

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB | HA

DC $_{e8}$	APMX	LPR	DN	LH	OAL	DCONMS $_{h6}$	ZEFP	V1 Article no. 52 133 ...		V1 Article no. 52 134 ...		V1 Article no. 52 135 ...		V1 Article no. 52 136 ...		V1 Article no. 52 348 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	
2	8	22			58	6	4	44,42	020	44,42	020						
3	12	22			58	6	4	44,42	030	44,42	030						
4	13	22			58	6	4	52,35	040	52,35	040						
5	15	22			58	6	6	54,23	050	54,23	050						
6	16	22			58	6	6	59,96	060	59,96	060						
6	16	44	5,8	40	80	6	6									62,82	060
6	21	29			65	6	6					74,39	060	74,39	060		
8	19	64	7,7	50	100	8	6									78,25	080
8	22	34			70	8	6	72,08	080	72,08	080						
8	28	39			75	8	6					87,84	080	87,84	080		
10	25	33			73	10	6	115,80	100	115,80	100						
10	25	60	9,7	60	100	10	6									115,80	100
10	35	45			85	10	6					131,30	100	131,30	100		
12	28	39			84	12	6	166,50	120	166,50	120						
12	30	75	11,6	60	120	12	6									152,10	120
12	45	55			100	12	6					200,60	120	200,60	120		
14	30	39			84	14	6	175,20	140	175,20	140						
14	45	55			100	14	6					232,50	140	232,50	140		
16	35	45			93	16	8	256,80	160	256,80	160						
16	40	102	15,6	100	150	16	8									314,10	160
16	50	62			110	16	8					327,30	160	327,30	160		
16	65	77			125	16	8					352,70	161	352,70	161		
18	35	45			93	18	10	271,10	180	271,10	180						
18	54	66			114	18	10					363,80	180	363,80	180		
20	40	54			104	20	10	367,00	200	367,00	200						
20	50	100	19,6	100	150	20	10									421,10	200
20	55	76			126	20	10					462,90	200	462,90	200		
20	70	85			135	20	10					565,50	201	565,50	201		

Steel	○	○	○	○	●
Stainless steel					
Cast iron					
Non ferrous metals					
Heat resistant alloys					
hardened materials	●	●	●	●	●

→ v_c/f_z Page 310–315

BlueLine – Finish milling cutter with corner radius

H | λ_s=30°–45° γ_s= 0° | ZEFP | 54–70 HRC

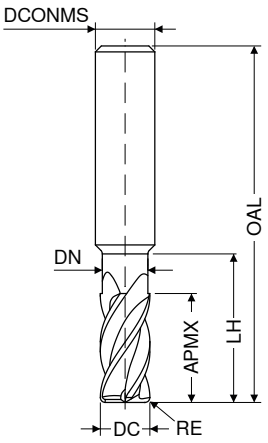

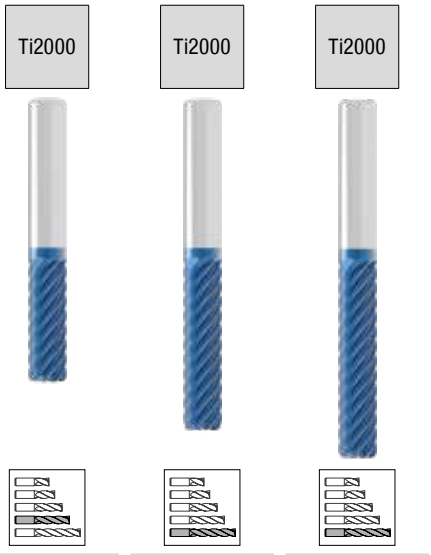

Factory standard | Factory standard | Factory standard

HA | HA | HA

V1 | V1 | V1

DC e8	RE +/-0,005	APMX	DN	LH	OAL	DCONMS h6	ZEFP	Article no. 52 324 ...		Article no. 52 325 ...		Article no. 52 326 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
5	0,5	15	4,8	19	58	6	6	59,84	052				
5	1,0	15	4,8	19	58	6	6	59,84	053				
6	0,5	16	5,8	20	58	6	6	60,29	062				
6	0,5	21	5,8	29	65	6	6			86,62	062		
6	1,0	16	5,8	20	58	6	6	70,10	063				
6	1,0	21	5,8	29	65	6	6			86,62	063		
8	0,5	22	7,8	26	70	8	6	70,65	082				
8	0,5	28	7,8	39	75	8	6			98,75	082		
8	1,0	22	7,8	26	70	8	6	78,04	083				
8	1,0	28	7,8	39	75	8	6			98,75	083		
10	0,5	25	9,8	31	73	10	6	113,60	102				
10	0,5	35	9,8	45	85	10	6			153,20	102		
10	1,0	25	9,8	31	73	10	6	113,60	103				
10	1,0	35	9,8	45	85	10	6			124,60	103		
10	1,5	25	9,8	31	73	10	6	131,30	104				
10	1,5	35	9,8	45	85	10	6			153,20	104		
12	0,5	28	11,8	37	84	12	6	153,20	122				
12	0,5	45	11,8	55	100	12	6			222,60	122		
12	1,0	28	11,8	37	84	12	6	153,20	123				
12	1,0	45	11,8	55	100	12	6			183,00	123		
12	1,5	28	11,8	37	84	12	6	177,50	124				
12	1,5	45	11,8	55	100	12	6			222,60	124		
14	1,0	30	13,8	37	84	14	6	189,60	143				
14	1,0	45	13,8	55	100	14	6			250,20	143		
16	1,0	35	15,8	43	93	16	8	291,00	163				
16	1,0	50	15,8	62	110	16	8			365,90	163		
16	1,0	65	15,8	77	125	16	8					391,40	163
16	2,0	35	15,8	43	93	16	8	291,00	165				
16	2,0	50	15,8	62	110	16	8			365,90	165		
16	2,0	65	15,8	77	125	16	8					391,40	165
18	1,0	35	17,8	43	93	18	10	311,90	183				
18	1,0	54	17,8	66	114	18	10			402,30	183		
20	1,0	40	19,8	52	104	20	10	414,30	203				
20	1,0	55	19,8	76	126	20	10			536,90	203		
20	1,0	70	19,8	85	135	20	10					640,30	203
20	2,0	40	19,8	52	104	20	10	414,30	205				
20	2,0	55	19,8	76	126	20	10			536,90	205		
20	2,0	70	19,8	85	135	20	10					640,30	205

Steel	○	○	○
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 310+311

14

BlueLine – Ball Nosed Cutter

▲ Radius accuracy: ±0,005 mm

H | λ_s=30° γ_s= 0° | ZEFP | 54–70 HRC | Ti2000

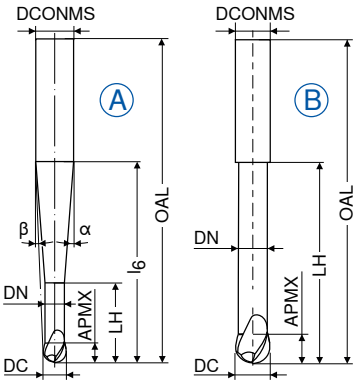

Factory standard

HA

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	V1 Article no. 52 302 ...	EUR	
1,0	1,00	0,95	10	16,5	57	15	9,0	6	2	A		127,80	**010**
1,5	1,25	1,40	12	18,0	57	15	7,5	6	2	A		115,80	**015**
2,0	1,50	1,90	16	20,0	57	15	6,0	6	2	A		92,14	**020**
3,0	2,00	2,90	20	34,5	80	15	2,5	6	2	A		111,30	**030**
4,0	2,50	3,90	22	35,0	80	15	2,0	6	2	A		104,40	**040**
5,0	3,00	4,90	25	35,0	80	15	1,0	6	2	A		102,40	**050**
6,0	3,50	5,90	29		80	15		6	2	B		97,43	**060**

Steel	○
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 310+311

BlueLine – Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm for Ø ≤ 6.0 mm / ± 0.01 mm for Ø > 6,0 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ±0.5°

H | λ_s=30° γ_s= 0° | ZEFP | 54–70 HRC

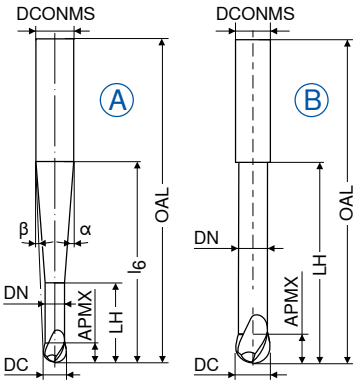

Ti2000

Factory standard

HA

V1

DC mm	Tol.	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	Article no. 52 303 ... EUR	
0,5	±0,01	1,0	0,45	2,0	20	57	10,0	8,5	6	2	A	138,80	**005**
1,0	±0,01	2,0	0,95	4,0	20	57	10,0	8,0	6	2	A	130,00	**010**
1,5	±0,01	2,5	1,40	7,5	20	57	12,5	7,0	6	2	A	123,50	**015**
2,0	±0,01	3,0	1,80	8,0	20	57	12,0	6,5	6	2	A	104,80	**020**
3,0	±0,01	3,5	2,80	10,0	20	57	11,5	5,0	6	2	A	99,75	**030**
4,0	±0,01	4,0	3,80	12,0	20	57	11,0	3,5	6	2	A	97,98	**040**
5,0	±0,01	5,0	4,70	14,0	20	57	10,0	2,0	6	2	A	98,20	**050**
6,0	±0,01	6,0	5,60	20,0		57			6	2	B	89,82	**060**
8,0	±0,02	7,0	7,60	25,0		63			8	2	B	122,30	**080**
10,0	±0,02	8,0	9,60	30,0		72			10	2	B	166,50	**100**
12,0	±0,02	10,0	11,50	35,0		83			12	2	B	215,00	**120**
12,0	±0,02	10,0	11,50	35,0	40	92	35,0	3,5	16	2	A	299,80	**121**
16,0	±0,02	12,0	15,50	40,0		92			16	2	B	291,00	**160**

Steel	○
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 310+311

14

BlueLine – Ball Nosed Cutter

▲ Radius accuracy: ±0,005 mm

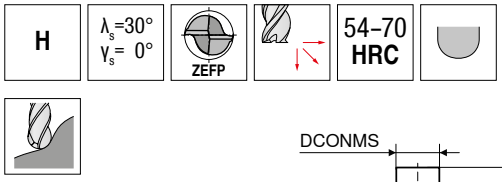

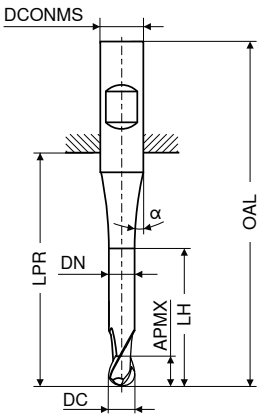

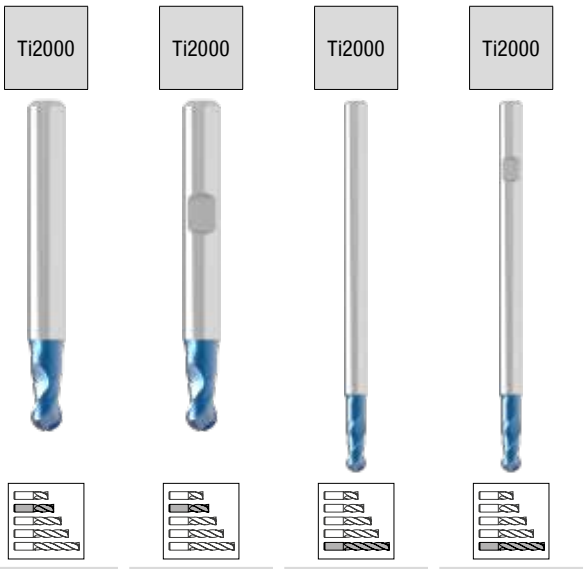

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC f8 mm	APMX mm	DN mm	LH mm	l6 mm	LPR mm	OAL mm	DCONMS h6 mm	α° ±0,5	ZEFP	Article no. 52 256 ...		Article no. 52 257 ...		Article no. 52 258 ...		Article no. 52 259 ...	
										EUR		EUR		EUR		EUR	
0,10	0,2			11	10	38	3	8,0	2	98,53	**910**						
0,15	0,3			12	10	38	3	7,5	2	90,82	**915**						
0,20	0,4			12	10	38	3	7,0	2	85,20	**920**						
0,25	0,5	0,20	0,8	12	10	38	3	7,0	2	90,93	**925**						
0,30	1,0	0,25	1,3	12	10	38	3	7,0	2	85,20	**930**						
0,35	1,0	0,30	1,3	12	10	38	3	7,0	2	76,16	**935**						
0,40	1,0	0,35	1,3	12	10	38	3	7,0	2	57,09	**940**						
0,50	1,5	0,40	2,0	12	10	38	3	7,5	2	47,29	**950**						
0,50	1,5	0,40	2,0	17	18	54	6	10,5	2	50,14	**005**	50,14	**005**				
0,50	1,5	0,40	2,0	13	47	75	3	7,0	2					64,26	**950**		
0,50	1,5	0,40	2,0	17	44	80	6	10,5	2					73,62	**005**	73,62	**005**
0,60	1,5	0,50	2,0	12	10	38	3	7,0	2	51,03	**960**						
0,70	2,0	0,60	2,5	12	10	38	3	7,5	2	47,29	**970**						
0,80	2,0	0,70	2,5	13	10	38	3	7,5	2	47,29	**980**						
0,90	2,5	0,80	3,5	13	10	38	3	7,0	2	47,29	**990**						
1,00	2,0	0,90	3,0	13	22	50	3	6,0	2	50,59	**011**						
1,00	2,0	0,90	3,0	18	18	54	6	9,5	2	55,33	**106**	55,33	**010**				
1,00	3,0	0,90	4,0	14	47	75	3	6,0	2					64,26	**011**		
1,00	3,0	0,90	4,0	19	44	80	6	9,5	2					70,87	**010**	70,87	**010**
1,10	3,0	1,00	4,0	13	22	50	3	7,0	2	47,29	**911**						
1,20	3,0	1,10	4,0	13	22	50	3	7,0	2	47,29	**012**						
1,40	3,0	1,30	4,0	14	22	50	3	5,0	2	47,29	**014**						
1,50	3,0	1,40	4,0	13	22	50	3	5,5	2	50,59	**016**						
1,50	3,0	1,40	4,0	18	18	54	6	9,0	2	55,33	**156**	55,33	**015**				
1,50	4,0	1,40	6,0	13	47	75	3	7,0	2					63,48	**016**		
1,50	4,0	1,40	6,0	19	44	80	6	10,0	2					70,21	**015**	70,21	**015**
1,60	4,0	1,50	5,0	13	22	50	3	5,0	2	47,29	**916**						
1,80	4,0	1,70	5,0	13	22	50	3	5,0	2	47,29	**018**						
2,00	4,0	1,90	5,5	12	22	50	3	5,0	2	50,59	**021**						
2,00	4,0	1,90	5,5	18	18	54	6	9,0	2	55,33	**206**	55,33	**020**				
2,00	6,0	1,90	8,0	12	47	75	3	8,0	2					60,07	**021**		
2,00	6,0	1,90	8,0	20	44	80	6	11,0	2					66,02	**020**	66,02	**020**
2,50	5,0	2,30	6,5	10	22	50	3	7,0	2	47,29	**025**						
2,50	5,0	2,30	6,5	17	18	54	6	10,0	2	55,33	**026**	55,33	**026**				
2,50	8,0	2,30	10,0	14	47	75	3	5,5	2					58,97	**026**		
2,50	8,0	2,30	10,0	20	44	80	6	10,0	2					65,14	**025**	65,14	**025**
3,00	6,0	2,80	8,0		22	50	3		2	50,59	**031**						
3,00	6,0	2,80	8,0	18	18	54	6	9,0	2	55,33	**306**	55,33	**030**				
3,00	10,0	2,80	13,0		47	75	3		2					58,08	**031**		
3,00	10,0	2,80	15,0	23	44	80	6	11,0	2					64,37	**030**	64,37	**030**

Steel	○	○	○	○
Stainless steel				
Cast iron				
Non ferrous metals				
Heat resistant alloys				
hardened materials	●	●	●	●

→ v_c/f_z Page 310+311

Continued on next page

BlueLine – Ball Nosed Cutter

▲ Radius accuracy: ±0,005 mm

H | λ_s=30° γ_s= 0° | ZEFP | 54–70 HRC

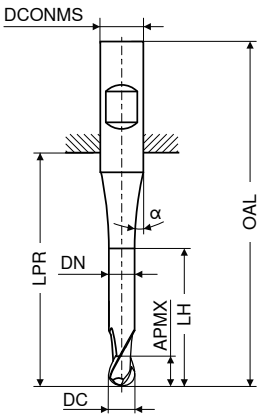

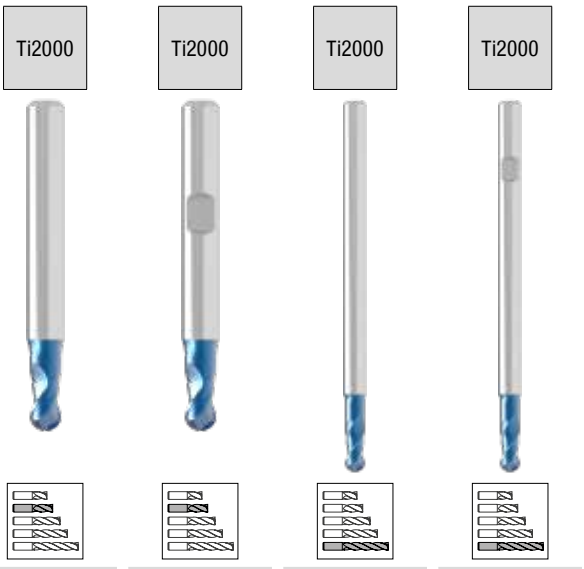

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

DC f8	APMX	DN	LH	l_6	LPR	OAL	DCONMS h6	α° ±0,5	ZEFP	V1 Article no. 52 256 ...		V1 Article no. 52 257 ...		V1 Article no. 52 258 ...		V1 Article no. 52 259 ...	
mm	mm	mm	mm	mm	mm	mm	mm			EUR		EUR		EUR		EUR	
4,00	7,0	3,80	10,0	18	18	54	6	11,0	2	55,33	406	55,33	040				
4,00	7,0	3,80	10,0		26	54	4		2	53,24	041						
4,00	13,0	3,80	20,0		47	75	4		2					55,99	041		
4,00	13,0	3,80	18,0	23	44	80	6	12,5	2					61,61	040	65,24	040
5,00	8,0	4,80	11,0	15	18	54	6	8,0	2	55,33	506	55,33	050				
5,00	8,0	4,80	11,0		26	54	5		2	55,33	051						
5,00	14,0	4,80	19,0		47	75	5		2					63,04	051		
5,00	14,0	4,80	19,0	21	64	100	6	13,0	2					69,66	050	69,66	050
6,00	10,0	5,80	15,0		18	54	6		2	55,33	061	55,33	060				
6,00	16,0	5,80	25,0		64	100	6		2					81,78	060	81,78	060
8,00	12,0	7,80	17,0		23	59	8		2	67,24	081	67,24	080				
8,00	22,0	7,80	35,0		64	100	8		2					98,09	080	98,09	080
10,00	13,0	9,80	18,0		27	67	10		2	87,52	101	87,52	100				
10,00	25,0	9,80	40,0		60	100	10		2					129,00	100	129,00	100
12,00	16,0	11,90	21,0		28	73	12		2	124,60	121	124,60	120				
12,00	26,0	11,80	40,0		55	100	12		2					168,60	120	168,60	120
14,00	16,0	13,80	21,0		30	75	14		2	157,60	141	157,60	140				
14,00	26,0	13,80	40,0		55	100	14		2					230,40	140	230,40	140
16,00	20,0	15,80	25,0		35	83	16		2	180,80	161	180,80	160				
16,00	30,0	15,80	50,0		102	150	16		2					371,40	160	371,40	160
20,00	25,0	19,80	30,0		43	93	20		2	295,40	201	295,40	200				
20,00	40,0	19,80	60,0		100	150	20		2					453,00	200	453,00	200

Steel	○	○	○	○
Stainless steel				
Cast iron				
Non ferrous metals				
Heat resistant alloys				
hardened materials	●	●	●	●

→ v_c/f_z Page 310+311

14

BlueLine – Ball Nosed Cutter

- Radius accuracy: ±0.005 mm
- for Ø ≤ 5.0 mm, angle tolerance α: ±0.5°

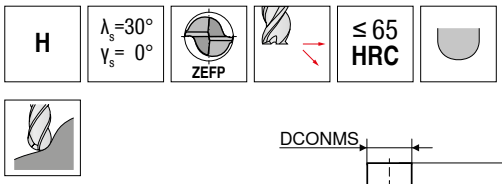

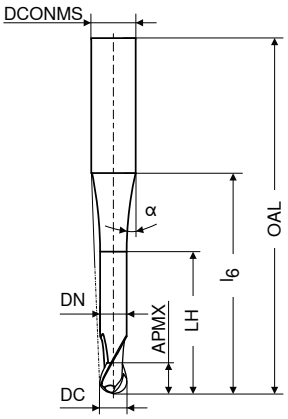

Ti2000

Factory standard

HA

DC f8 mm	APMX mm	DN mm	LH mm	l6 mm	OAL mm	α°	DCONMS h6 mm	ZEFP	V1 Article no. 52 352 ...	EUR
0,6	0,8	0,55	1,4	27	75	1,5	3	2	70,87	**906**
0,8	1,0	0,75	1,6	27	75	1,5	3	2	68,44	**908**
1,0	1,2	0,95	2,0	27	75	1,5	3	2	67,12	**310**
1,2	1,4	1,15	2,4	27	75	1,5	3	2	66,47	**312**
1,5	1,8	1,45	3,0	27	75	1,5	3	2	64,58	**315**
2,0	2,4	1,95	4,0	27	75	1,5	3	2	64,03	**320**
3,0	4,0	2,80	12,0	40	80	1,5	6	2	102,50	**030**
4,0	5,0	3,80	16,0	40	80	1,5	6	2	101,50	**040**
5,0	6,0	4,80	20,0	40	80	1,5	6	2	101,10	**050**
6,0	6,0	5,80	25,0	50	100	1,5	8	2	138,80	**060**
8,0	7,0	7,80	32,0	60	120	1,5	10	2	188,60	**080**
10,0	9,0	9,80	40,0	80	160	1,5	12	2	294,30	**100**
12,0	11,0	11,80	50,0	100	200	1,5	16	2	503,70	**120**

Steel	●
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 314

BlueLine – Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

H | λ_s=30° γ_s= 0° | ZEFP | ≤ 65 HRC

Ti2000

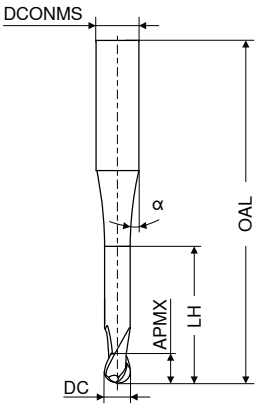

Factory standard

HA

DC f8 mm	APMX mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	V1 Article no. 52 355 ... EUR	
3	8	11	65	12	6	3	61,29	030
4	8	11	75	12	6	3	63,04	040
5	10	13	75	12	6	3	63,04	050
6	12		100		6	3	65,14	060
8	14		100		8	3	88,72	080
10	18		100		10	3	112,40	100
12	22		120		12	3	146,50	120

Steel	●
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 314

14

BlueLine – Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

H | λ_s=30° γ_s= 0° | ZEFP | 54–70 HRC

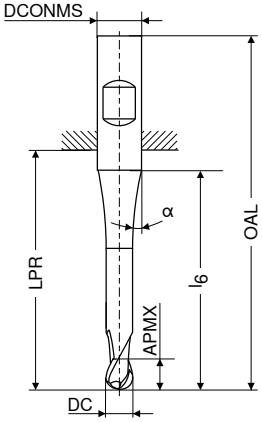

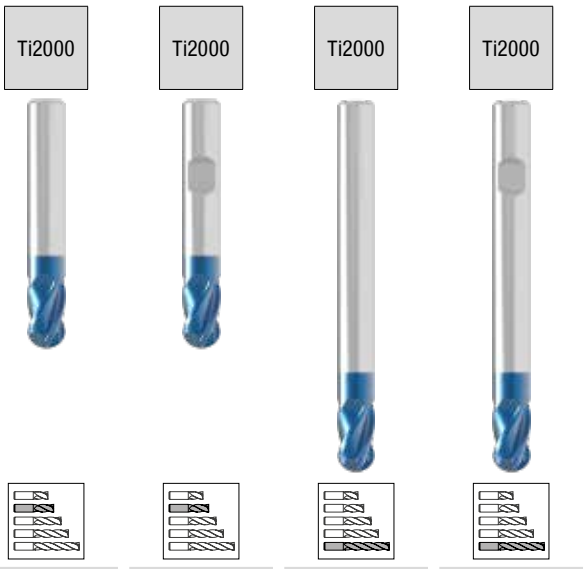

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC f8 mm	APMX mm	l_6 mm	LPR mm	OAL mm	α° ±1°	DCONMS h6 mm	ZEFP	Article no. 52 404 ... EUR		Article no. 52 405 ... EUR		Article no. 52 404 ... EUR		Article no. 52 405 ... EUR	
2,0	4	10,0	22	50	8	3	4	47,83	020						
2,0	4	16,0	18	54	12	6	4	56,76	021	56,76	021				
2,0	4	10,0	47	75	8	3	4					62,93	022		
2,0	4	16,0	44	80	12	6	4					82,33	023	82,33	023
2,5	5	16,0	18	54	12	6	4	56,76	025	56,76	025				
2,5	5	16,0	44	80	12	6	4					77,49	026	77,49	026
3,0	5		22	50		3	4	51,03	030						
3,0	5	14,0	18	54	12	6	4	55,55	031	55,55	031				
3,0	5		47	75		3	4					64,15	032		
3,0	5	14,0	44	80	12	6	4					80,35	033	80,35	033
4,0	8	15,0	18	54	12	6	4	55,55	041	55,55	041				
4,0	8		26	54		4	4	52,90	040						
4,0	8		47	75		4	4					73,29	042		
4,0	8	15,0	44	80	12	6	4					79,80	043	79,80	043
5,0	9	13,5	18	54	12	6	4	54,89	051	54,89	051				
5,0	9		26	54		5	4	52,69	050						
5,0	9		47	75		5	4					73,94	052		
5,0	9	13,5	64	100	12	6	4					77,81	053	77,81	053
6,0	10		18	54		6	4	54,78	060	54,78	060				
6,0	10		64	100		6	4					76,60	062	76,60	062
7,0	12	15,0	23	59	12	8	4	74,39	070	74,39	070				
8,0	12		23	59		8	4	68,22	080	68,22	080				
8,0	12		64	100		8	4					97,54	082	97,54	082
9,0	14	17,0	27	67	12	10	4	99,53	090	99,53	090				
10,0	14	16,0	27	67		10	4	92,25	100	92,25	100				
10,0	14		60	100		10	4					126,80	102	126,80	102
12,0	16		29	74		12	4	124,60	120	124,60	120				
12,0	16		55	100		12	4					162,00	122	162,00	122
14,0	18		30	75		14	4	155,50	140	155,50	140				
14,0	18	20,0	55	100		14	4					202,80	142	202,80	142
16,0	22	24,0	35	83		16	4	195,10	160	195,10	160				
16,0	22	24,0	102	150		16	4					315,20	162	315,20	162
20,0	26	28,0	43	93		20	4	297,50	200	297,50	200				
20,0	26	28,0	100	150		20	4					435,30	202	435,30	202

Steel	○	○	○	○
Stainless steel				
Cast iron				
Non ferrous metals				
Heat resistant alloys				
hardened materials	●	●	●	●

→ v_c/f_z Page 310+311

BlueLine – Torus cutter

▲ Radius accuracy: ±0,005 mm for Ø ≤ 6,0 mm / ±0,01 mm for Ø > 6,0 mm
▲ or Ø ≤ 5.0 mm, angle tolerance α and β: ±0.5 °

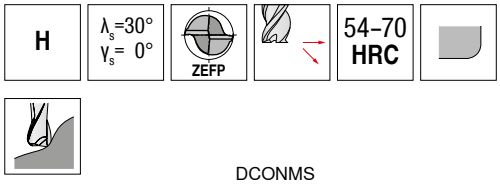

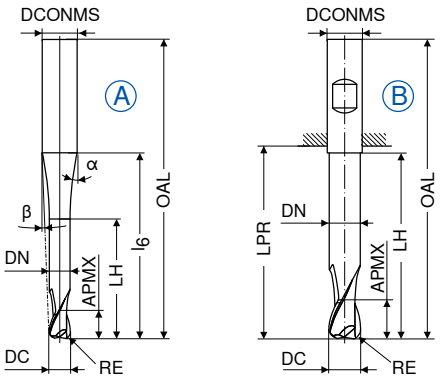

LPR with Shank DIN 6535 HB

Factory standard

Factory standard

V1

V1

DC ±0,01	RE	APMX	DN	LH	LPR	l6	OAL	α° ±0,5	β°	DCONMS h5	ZEFP	Fig.	Article no. 52 305 ...		Article no. 52 305 ...	
mm	mm	mm	mm	mm	mm	mm	mm			mm			EUR		EUR	
1,0	0,2	1,00	0,95	10	21	16,5	57	23,0	9,0	6	2	A	138,80	**010**		
1,5	0,3	1,25	1,40	12	21	18,0	57	21,0	7,5	6	2	A	125,70	**015**		
2,0	0,4	1,50	1,90	16	21	20,0	57	25,0	6,0	6	2	A	102,20	**020**		
3,0	0,5	2,00	2,90	20	44	34,5	80	6,0	2,5	6	2	A	121,30	**030**		
4,0	0,6	2,50	3,90	22	44	35,0	80	4,5	2,0	6	2	A	114,60	**040**		
5,0	0,8	3,00	4,90	25	44	35,0	80	3,5	1,0	6	2	A	112,40	**050**		
6,0	1,0	3,50	5,90	29	44		80			6	2	B			105,60	**060**

Steel	○	○
Stainless steel		
Cast iron		
Non ferrous metals		
Heat resistant alloys		
hardened materials	●	●

→ v_c/f_z Page 312+313

BlueLine – Torus cutter

▲ Radius accuracy: ±0,005 mm for Ø ≤ 6,0 mm / ±0,01 mm for Ø > 6,0 mm
▲ or Ø ≤ 5.0 mm, angle tolerance α and β: ±0.5 °

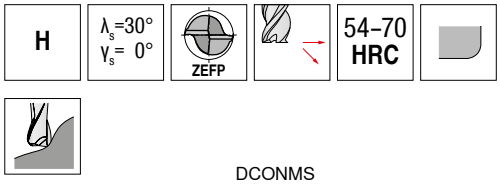

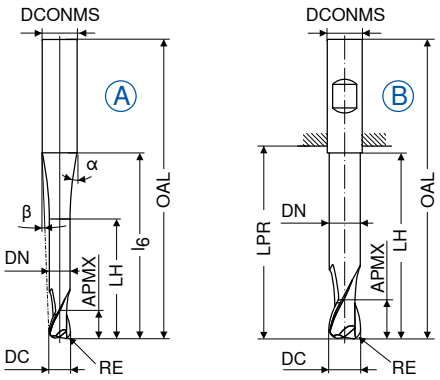

Factory standard | Factory standard

LPR with Shank DIN 6535 HB

HA | HB

DC mm	Tol.	RE mm	APMX mm	DN mm	LH mm	LPR mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	V1 Article no. 52 304 ... EUR		V1 Article no. 52 304 ... EUR	
0,5	±0,01	0,10	1,0	0,45	2,0	21	20	57	10,0	8,5	6	2	A	144,40	**005**		
1,0	±0,01	0,25	2,0	0,95	4,0	21	20	57	10,0	8,0	6	2	A	142,30	**010**		
1,5	±0,01	0,30	2,5	1,40	7,5	21	20	57	12,5	7,0	6	2	A	130,00	**015**		
2,0	±0,01	0,50	3,0	1,80	8,0	21	20	57	12,0	6,5	6	2	A	103,60	**020**		
3,0	±0,01	0,50	3,5	2,80	10,0	21	20	57	11,5	5,0	6	2	A	101,10	**030**		
4,0	±0,01	1,00	4,0	3,80	12,0	21	20	57	11,0	3,5	6	2	A	97,98	**040**		
5,0	±0,01	1,50	5,0	4,70	14,0	21	20	57	10,0	2,0	6	2	A	101,90	**050**		
6,0	±0,01	2,00	6,0	5,60	20,0	21		57			6	2	B			98,75	**060**
8,0	±0,02	2,00	7,0	7,60	25,0	27		63			8	2	B			127,80	**080**
10,0	±0,02	3,00	8,0	9,60	30,0	32		72			10	2	B			177,50	**100**
12,0	±0,02	4,00	10,0	11,50	35,0	38		83			12	2	B			227,00	**120**
12,0	±0,02	4,00	10,0	11,50	35,0	44	40	92	37,0	3,5	16	2	A	328,50	**121**		
16,0	±0,02	5,00	12,0	15,50	40,0	44		92			16	2	B			321,90	**160**

Steel	○	○
Stainless steel		
Cast iron		
Non ferrous metals		
Heat resistant alloys		
hardened materials	●	●

→ v_c/f_z Page 312+313

BlueLine – Torus cutter

H | λ_s=30° γ_s= 0° | ZEFP | ≤ 65 HRC

Ti2000

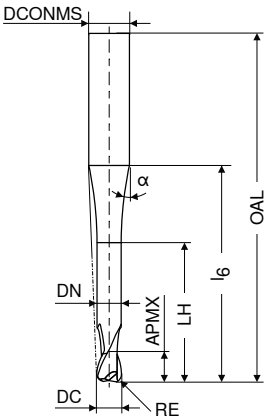

Factory standard

HA

V1

DC e8	RE ±0,01	APMX	DN	LH	l_6	OAL	α°	DCONMS h5	ZEFP	Article no. 52 361 ...
mm	mm	mm	mm	mm	mm	mm		mm		EUR
0,8	0,08	1,0	0,75	1,6	27	75	1,5	3	2	65,79 **90801**
1,0	0,10	1,2	0,95	2,0	27	75	1,5	3	2	67,24 **31001**
1,0	0,25	2,0	0,85	4,0	40	80	1,5	6	2	106,00 **01002**
1,2	0,12	1,4	1,15	2,4	27	75	1,5	3	2	66,47 **31201**
1,5	0,15	1,8	1,45	3,0	27	75	1,5	3	2	64,58 **31501**
2,0	0,20	2,4	1,95	4,0	27	75	1,5	3	2	64,03 **32002**
2,0	0,50	2,0	1,80	8,0	40	80	1,5	6	2	102,50 **02005**
3,0	0,30	3,6	2,95	6,0	27	75	1,5	4	2	68,44 **43003**
3,0	0,50	2,0	2,80	12,0	40	80	1,5	6	2	102,50 **03005**
3,0	1,00	2,0	2,80	12,0	40	80	1,5	6	2	102,50 **03010**
4,0	1,00	3,0	3,80	16,0	40	80	1,5	6	2	102,50 **04010**
6,0	1,00	4,0	5,80	25,0	50	100	1,5	8	2	138,80 **06010**
6,0	2,00	4,0	5,80	25,0	50	100	1,5	8	2	138,80 **06020**
8,0	1,00	4,0	7,80	32,0	60	120	1,5	10	2	188,60 **08010**
8,0	2,00	4,0	7,80	32,0	60	120	1,5	10	2	188,60 **08020**
10,0	1,50	6,0	9,80	40,0	80	160	1,5	12	2	294,30 **10015**
12,0	1,50	8,0	11,80	50,0	100	200	1,5	16	2	508,10 **12015**

Steel	●
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
hardened materials	●

→ v_c/f_z Page 314+315

14

Micro-end milling cutter

▲ T_x = maximum engagement depth

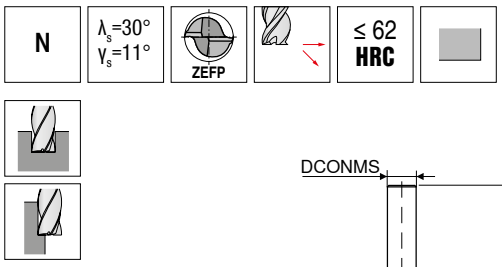

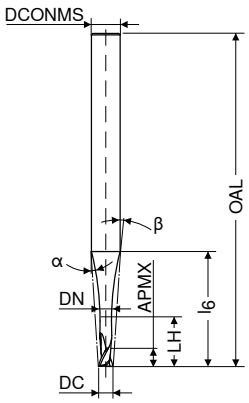

Factory standard

Factory standard

HA

HA

V1

V1

DC	APMX	DN	LH	l_6	OAL	α°	β°	DCONMS $_{h5}$	T_x	ZEFP	Article no. 52 802 ...		Article no. 52 802 ...	
mm	mm	mm	mm	mm	mm			mm			EUR		EUR	
0,2	0,12	0,16	0,44	5,7	38	15,0	14	3	2,2 x DC	2	49,71	021		
0,2	0,20	0,16	1,00	6,4	38	15,0	13	3	5 x DC	2	49,71	023		
0,2	0,20	0,16	2,00	9,2	38	15,0	9	3	10 x DC	2	49,71	025		
0,2	0,20	0,16	0,44	5,7	43	15,0	14	3	2,2 x DC	2			49,71	022
0,2	0,20	0,16	1,00	6,4	43	15,0	13	3	5 x DC	2			49,71	024
0,2	0,20	0,16	2,00	9,2	43	15,0	9	3	10 x DC	2			49,71	026
0,5	0,30	0,40	1,10	5,8	38	15,0	13	3	2,2 x DC	2	38,14	051		
0,5	0,50	0,40	2,50	7,8	38	15,0	10	3	5 x DC	2	38,14	053		
0,5	0,50	0,40	5,00	10,7	38	13,0	7	3	10 x DC	2	38,14	055		
0,5	0,50	0,40	1,10	5,8	43	15,0	13	3	2,2 x DC	2			38,14	052
0,5	0,50	0,40	2,50	7,8	43	15,0	10	3	5 x DC	2			38,14	054
0,5	0,50	0,40	5,00	14,5	43	13,0	5	3	10 x DC	2			38,14	056
0,8	0,48	0,64	1,76	5,9	38	15,0	11	3	2,2 x DC	2	43,98	081		
0,8	0,80	0,64	4,00	9,0	38	15,0	7	3	5 x DC	2	43,98	083		
0,8	0,80	0,64	8,00	13,5	38	12,0	5	3	10 x DC	2	43,98	085		
0,8	0,80	0,64	1,76	5,9	43	15,0	11	3	2,2 x DC	2			43,98	082
0,8	0,80	0,64	4,00	9,0	43	15,0	7	3	5 x DC	2			43,98	084
0,8	0,80	0,64	8,00	15,5	43	9,8	5	3	10 x DC	2			43,98	086
1,0	0,60	0,80	2,20	5,9	38	15,0	10	3	2,2 x DC	2	36,59	101		
1,0	1,00	0,80	2,20	5,9	43	15,0	10	3	2,2 x DC	2			36,59	102
1,0	1,00	0,80	5,00	9,7	43	15,0	6	3	5 x DC	2	36,59	103		
1,0	1,00	0,80	10,00	15,3	43	11,0	4	3	10 x DC	2	37,69	105		
1,0	1,00	0,80	5,00	9,7	50	15,0	6	3	5 x DC	2			36,59	104
1,0	1,00	0,80	10,00	20,6	50	8,5	3	3	10 x DC	2			37,69	106
1,5	0,90	1,20	3,30	6,1	38	15,0	8	3	2,2 x DC	2	39,46	151		
1,5	1,50	1,20	3,30	6,1	43	15,0	8	3	2,2 x DC	2			39,46	152
1,5	1,50	1,20	7,50	11,8	43	14,0	4	3	5 x DC	2	39,46	153		
1,5	1,50	1,20	15,00	18,1	43	14,6	3	3	10 x DC	2	42,11	155		
1,5	1,50	1,20	7,50	11,8	50	14,0	4	3	5 x DC	2			39,46	154
1,5	1,50	1,20	15,00	22,0	50	6,2	2	3	10 x DC	2			42,11	156
1,8	1,08	1,44	3,96	6,2	38	15,0	6	3	2,2 x DC	2	39,46	181		
1,8	1,80	1,44	3,96	6,2	43	15,0	6	3	2,2 x DC	2			39,46	182
1,8	1,80	1,44	9,00	12,9	43	12,0	3	3	5 x DC	2	39,90	183		
1,8	1,80	1,44	18,00	20,0	43	19,8	2	3	10 x DC	2	44,53	185		
1,8	1,80	1,44	9,00	12,9	50	12,0	3	3	5 x DC	2			39,90	184
1,8	1,80	1,44	18,00	22,0	50	5,3	2	3	10 x DC	2			44,53	186
2,0	1,20	1,60	4,40	11,9	50	15,0	10	6	2,2 x DC	2	39,46	201		
2,0	2,00	1,60	10,00	19,7	50	15,0	6	6	5 x DC	2	39,90	203		
2,0	2,00	1,60	20,00	25,0	50	22,1	5	6	10 x DC	2	44,53	205		
2,0	2,00	1,60	4,40	11,9	57	15,0	10	6	2,2 x DC	2			39,46	202
2,0	2,00	1,60	10,00	19,7	57	15,0	6	6	5 x DC	2			39,90	204
2,0	2,00	1,60	20,00	29,0	57	7,8	4	6	10 x DC	2			44,53	206

Steel	●	●
Stainless steel	●	●
Cast iron	●	●
Non ferrous metals	●	●
Heat resistant alloys	●	●
hardened materials	●	●

→ v_c/f_z Page 318–325

Use the Micro mills on machines with the highest accuracy and good stability.

Micro-ball nosed cutter

▲ T_x = maximum engagement depth

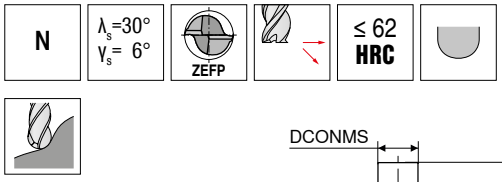

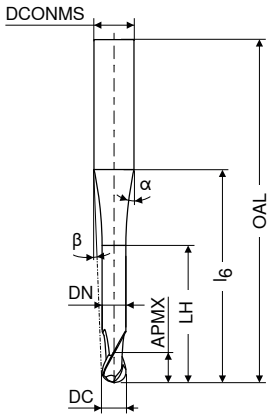

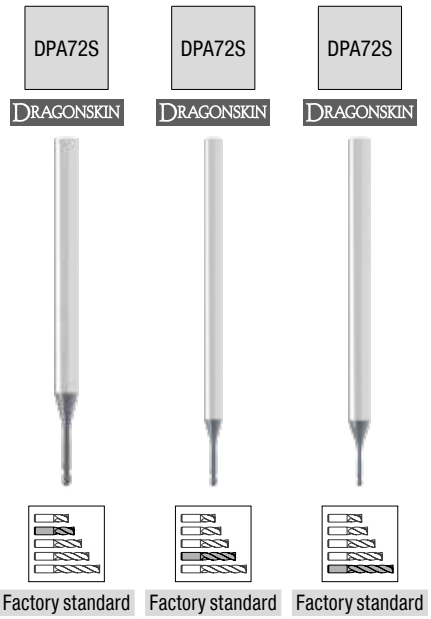

DC ±0,01	APMX	DN	LH	l_6	OAL	α°	β°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 804 ...		V1 Article no. 52 804 ...		V1 Article no. 52 804 ...	
mm	mm	mm	mm	mm	mm			mm			EUR		EUR		EUR	
0,2	0,12	0,16	0,44	5,7	38	15,0	14	3	2,2 x DC	2	55,55	021				
0,2	0,20	0,16	1,00	6,4	38	15,0	13	3	5 x DC	2	55,55	024				
0,2	0,20	0,16	2,00	9,2	38	15,0	9	3	10 x DC	2	55,55	027				
0,2	0,12	0,16	0,44	5,7	50	15,0	14	3	2,2 x DC	2			55,55	022		
0,2	0,20	0,16	1,00	6,4	50	15,0	13	3	5 x DC	2			55,55	025		
0,2	0,20	0,16	2,00	9,2	50	15,0	9	3	10 x DC	2			55,55	028		
0,2	0,12	0,16	0,44	11,3	80	15,0	15	6	2,2 x DC	2					55,55	023
0,2	0,20	0,16	1,00	12,0	80	15,0	14	6	5 x DC	2					55,55	026
0,2	0,20	0,16	2,00	14,8	80	15,0	12	6	10 x DC	2					55,55	029
0,5	0,30	0,40	1,10	5,8	38	15,0	13	3	2,2 x DC	2	43,32	051				
0,5	0,50	0,40	2,50	7,8	38	15,0	10	3	5 x DC	2	43,32	054				
0,5	0,50	0,40	5,00	10,7	38	13,0	7	3	10 x DC	2	43,32	057				
0,5	0,30	0,40	1,10	5,8	50	15,0	13	3	2,2 x DC	2			43,32	052		
0,5	0,50	0,40	2,50	7,8	50	15,0	10	3	5 x DC	2			43,32	055		
0,5	0,50	0,40	5,00	14,5	50	13,0	5	3	10 x DC	2			43,32	058		
0,5	0,30	0,40	1,10	11,4	80	15,0	14	6	2,2 x DC	2					43,32	053
0,5	0,50	0,40	2,50	13,4	80	15,0	12	6	5 x DC	2					43,32	056
0,5	0,50	0,40	5,00	20,2	80	15,0	8	6	10 x DC	2					43,32	059
0,8	0,48	0,64	1,76	5,9	38	15,0	11	3	2,2 x DC	2	48,93	081				
0,8	0,80	0,64	4,00	9,0	38	15,0	7	3	5 x DC	2	48,93	084				
0,8	0,80	0,64	8,00	10,5	38	8,2	6	3	10 x DC	2	49,38	087				
0,8	0,48	0,64	1,76	5,9	50	15,0	11	3	2,2 x DC	2			48,93	082		
0,8	0,80	0,64	4,00	9,0	50	15,0	7	3	5 x DC	2			48,93	085		
0,8	0,80	0,64	8,00	18,7	50	9,8	4	3	10 x DC	2			49,38	088		
0,8	0,48	0,64	1,76	11,5	80	15,0	13	6	2,2 x DC	2					48,93	083
0,8	0,80	0,64	4,00	14,6	80	15,0	11	6	5 x DC	2					48,93	086
0,8	0,80	0,64	8,00	25,9	80	14,8	6	6	10 x DC	2					49,38	089
1,0	0,60	0,80	2,20	7,8	43	15,0	11	4	2,2 x DC	2	41,56	101				
1,0	1,00	0,80	5,00	11,6	43	15,0	8	4	5 x DC	2	41,56	104				
1,0	1,00	0,80	10,00	18,3	43	8,0	5	4	10 x DC	2	44,64	107				
1,0	0,60	0,80	2,20	7,8	60	15,0	11	4	2,2 x DC	2			41,56	102		
1,0	1,00	0,80	5,00	11,6	60	15,0	8	4	5 x DC	2			41,56	105		
1,0	1,00	0,80	10,00	23,7	60	10,2	4	4	10 x DC	2			44,64	108		
1,0	0,60	0,80	2,20	11,5	80	15,0	13	6	2,2 x DC	2					41,56	103
1,0	1,00	0,80	5,00	15,3	80	15,0	10	6	5 x DC	2					41,56	106
1,0	1,00	0,80	10,00	28,7	80	13,0	5	6	10 x DC	2					44,64	109
1,2	0,72	0,96	2,64	7,9	43	15,0	11	4	2,2 x DC	2	46,06	121				
1,2	1,20	0,96	6,00	12,4	43	15,0	7	4	5 x DC	2	46,06	124				
1,2	1,20	0,96	12,00	18,2	43	9,3	5	4	10 x DC	2	47,83	127				
1,2	0,72	0,96	2,64	7,9	60	15,0	11	4	2,2 x DC	2			46,06	122		
1,2	1,20	0,96	6,00	12,4	60	15,0	7	4	5 x DC	2			46,06	125		
1,2	1,20	0,96	12,00	26,1	60	9,1	4	4	10 x DC	2			47,83	128		

Steel	●	●	●
Stainless steel	●	●	●
Cast iron	●	●	●
Non ferrous metals	●	●	●
Heat resistant alloys	●	●	●
hardened materials	●	●	●

→ v_c/f_z Page 318–325

Use the Micro mills on machines with the highest accuracy and good stability.

14

Micro-ball nosed cutter

▲ T_x = maximum engagement depth

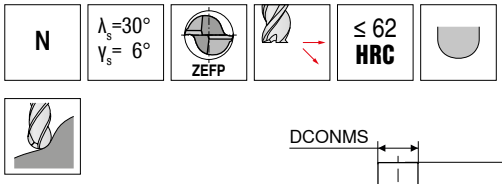

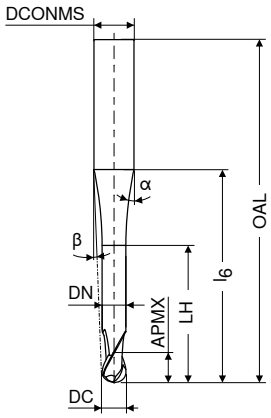

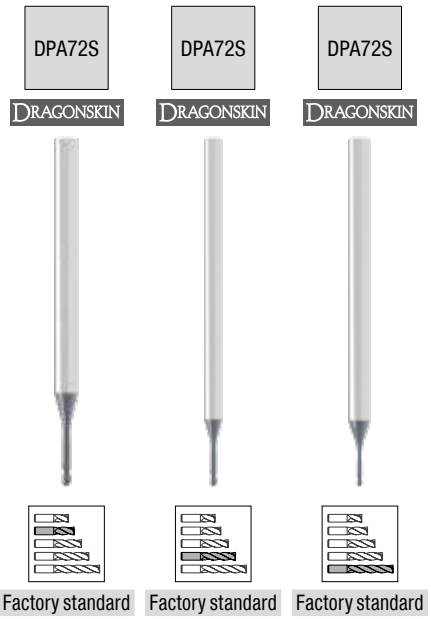

Factory standard | Factory standard | Factory standard

HA | HA | HA

DC ±0,01	APMX	DN	LH	l_6	OAL	α°	β°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 804 ...	EUR	V1 Article no. 52 804 ...	EUR	V1 Article no. 52 804 ...	EUR
mm	mm	mm	mm	mm	mm			mm								
1,2	0,72	0,96	2,64	11,6	80	15,0	12	6	2,2 x DC	2					46,06	123
1,2	1,20	0,96	6,00	16,2	80	15,0	9	6	5 x DC	2					46,06	126
1,2	1,20	0,96	12,00	31,8	80	11,7	5	6	10 x DC	2					47,83	129
1,5	0,90	1,20	3,30	8,0	43	15,0	9	4	2,2 x DC	2	43,43	151				
1,5	1,50	1,20	7,50	13,7	43	15,0	6	4	5 x DC	2	45,96	154				
1,5	1,50	1,20	15,00	18,1	43	13,5	4	4	10 x DC	2	45,96	157				
1,5	0,90	1,20	3,30	8,0	60	15,0	9	4	2,2 x DC	2			43,43	152		
1,5	1,50	1,20	7,50	13,7	60	15,0	6	4	5 x DC	2			45,96	155		
1,5	1,50	1,20	15,00	28,0	60	7,8	3	4	10 x DC	2			45,96	158		
1,5	0,90	1,20	3,30	11,7	80	15,0	11	6	2,2 x DC	2					43,43	153
1,5	1,50	1,20	7,50	17,4	80	15,0	8	6	5 x DC	2					45,96	156
1,5	1,50	1,20	15,00	35,8	80	10,2	4	6	10 x DC	2					45,96	159
1,8	1,08	1,44	3,96	8,1	43	15,0	8	4	2,2 x DC	2	45,96	181				
1,8	1,80	1,44	9,00	15,0	43	15,0	5	4	5 x DC	2	45,96	184				
1,8	1,80	1,44	18,00	19,5	43	31,1	4	4	10 x DC	2	47,83	187				
1,8	1,08	1,44	3,96	8,1	60	15,0	8	4	2,2 x DC	2			45,96	182		
1,8	1,80	1,44	9,00	15,0	60	15,0	5	4	5 x DC	2			45,96	185		
1,8	1,80	1,44	18,00	31,9	60	6,8	2	4	10 x DC	2			47,83	188		
1,8	1,08	1,44	3,96	11,8	80	15,0	11	6	2,2 x DC	2					45,96	183
1,8	1,80	1,44	9,00	18,7	80	15,0	7	6	5 x DC	2					45,96	186
1,8	1,80	1,44	18,00	39,3	80	9,1	4	6	10 x DC	2					47,83	189
2,0	1,20	1,60	4,40	11,9	57	15,0	10	6	2,2 x DC	2	43,32	201				
2,0	2,00	1,60	10,00	19,7	57	15,0	6	6	5 x DC	2	45,96	204				
2,0	2,00	1,60	20,00	32,0	57	9,5	4	6	10 x DC	2	45,96	207				
2,0	1,20	1,60	4,40	11,9	70	15,0	10	6	2,2 x DC	2			43,32	202		
2,0	2,00	1,60	10,00	19,7	70	15,0	6	6	5 x DC	2			45,96	205		
2,0	2,00	1,60	20,00	41,4	70	8,5	3	6	10 x DC	2			45,96	208		
2,0	1,20	1,60	4,40	11,9	80	15,0	10	6	2,2 x DC	2					43,32	203
2,0	2,00	1,60	10,00	19,7	80	15,0	6	6	5 x DC	2					45,96	206
2,0	2,00	1,60	20,00	41,4	80	8,5	3	6	10 x DC	2					45,96	209

Steel	●	●	●
Stainless steel	●	●	●
Cast iron	●	●	●
Non ferrous metals	●	●	●
Heat resistant alloys	●	●	●
hardened materials	●	●	●

→ v_c/f_z Page 318–325

Use the Micro mills on machines with the highest accuracy and good stability.

Micro-torus cutter

▲ T_x = maximum engagement depth

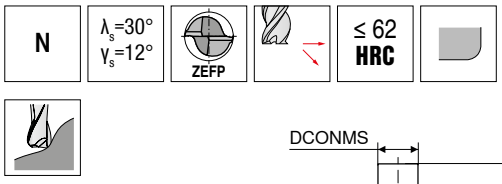

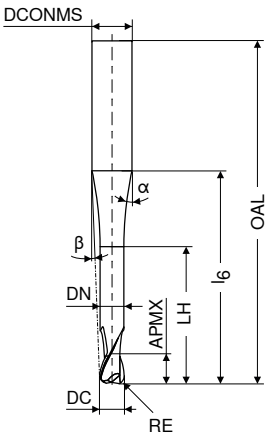

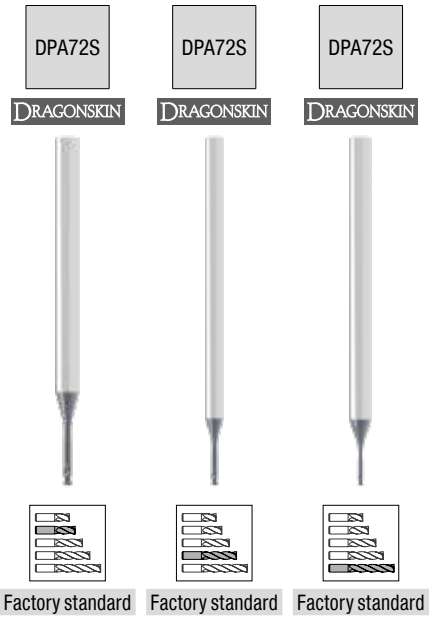

DC ±0,01	RE ±0,005	APMX	DN	LH	l_6	OAL	α°	β°	DCONMS h5	T_x	ZEFP	V1 Article no. 52 806 ...		V1 Article no. 52 806 ...		V1 Article no. 52 806 ...	
mm	mm	mm	mm	mm	mm	mm			mm			EUR		EUR		EUR	
0,5	0,1	0,3	0,4	1,1	5,8	38	15,0	13	3	2,2 x DC	2	44,19	051				
0,5	0,1	0,5	0,4	2,5	7,8	38	15,0	10	3	5 x DC	2	44,19	054				
0,5	0,1	0,5	0,4	5,0	10,7	38	13,0	7	3	10 x DC	2	44,19	057				
0,5	0,1	0,3	0,4	1,1	5,8	50	15,0	13	3	2,2 x DC	2			44,19	052		
0,5	0,1	0,5	0,4	2,5	7,8	50	15,0	10	3	5 x DC	2			44,19	055		
0,5	0,1	0,5	0,4	5,0	14,5	50	13,0	5	3	10 x DC	2			44,19	058		
0,5	0,1	0,3	0,4	1,1	11,4	80	15,0	14	6	2,2 x DC	2					44,19	053
0,5	0,1	0,5	0,4	2,5	13,4	80	15,0	12	6	5 x DC	2					44,19	056
0,5	0,1	0,5	0,4	5,0	20,2	80	15,0	8	6	10 x DC	2					44,19	059
1,0	0,2	0,6	0,8	2,2	7,8	43	15,0	11	4	2,2 x DC	2	42,21	101				
1,0	0,2	1,0	0,8	5,0	11,6	43	15,0	8	4	5 x DC	2	45,51	104				
1,0	0,2	1,0	0,8	10,0	18,3	43	8,0	5	4	10 x DC	2	45,51	107				
1,0	0,2	0,6	0,8	2,2	7,8	60	15,0	11	4	2,2 x DC	2			42,21	102		
1,0	0,2	1,0	0,8	5,0	11,6	60	15,0	8	4	5 x DC	2			45,51	105		
1,0	0,2	1,0	0,8	10,0	23,7	60	10,2	4	4	10 x DC	2			45,51	108		
1,0	0,2	0,6	0,8	2,2	11,5	80	15,0	13	6	2,2 x DC	2					42,21	103
1,0	0,2	1,0	0,8	5,0	15,3	80	15,0	10	6	5 x DC	2					45,51	106
1,0	0,2	1,0	0,8	10,0	28,7	80	13,0	5	6	10 x DC	2					45,51	109
1,5	0,3	0,9	1,2	3,3	8,0	43	15,0	9	4	2,2 x DC	2	44,30	151				
1,5	0,3	1,5	1,2	7,5	13,7	43	15,0	6	4	5 x DC	2	46,96	154				
1,5	0,3	1,5	1,2	15,0	18,1	43	13,5	4	4	10 x DC	2	46,96	157				
1,5	0,3	0,9	1,2	3,3	8,0	60	15,0	9	4	2,2 x DC	2			44,30	152		
1,5	0,3	1,5	1,2	7,5	13,7	60	15,0	6	4	5 x DC	2			46,96	155		
1,5	0,3	1,5	1,2	15,0	29,2	60	7,8	3	4	10 x DC	2			46,96	158		
1,5	0,3	0,9	1,2	3,3	11,7	80	15,0	11	6	2,2 x DC	2					44,30	153
1,5	0,3	1,5	1,2	7,5	17,4	80	15,0	8	6	5 x DC	2					46,96	156
1,5	0,3	1,5	1,2	15,0	35,8	80	10,2	4	6	10 x DC	2					46,96	159
2,0	0,5	1,2	1,6	4,4	11,9	57	15,0	10	6	2,2 x DC	2	44,19	201				
2,0	0,5	2,0	1,6	10,0	19,7	57	15,0	6	6	5 x DC	2	46,96	204				
2,0	0,5	2,0	1,6	20,0	32,0	57	9,5	4	6	10 x DC	2	46,96	207				
2,0	0,5	1,2	1,6	4,4	11,9	70	15,0	10	6	2,2 x DC	2			44,19	202		
2,0	0,5	2,0	1,6	10,0	19,7	70	15,0	6	6	5 x DC	2			46,96	205		
2,0	0,5	2,0	1,6	20,0	41,4	70	8,5	3	6	10 x DC	2			46,96	208		
2,0	0,5	1,2	1,6	4,4	11,9	80	15,0	10	6	2,2 x DC	2					44,19	203
2,0	0,5	2,0	1,6	10,0	19,7	80	15,0	6	6	5 x DC	2					46,96	206
2,0	0,5	2,0	1,6	20,0	41,4	80	8,5	3	6	10 x DC	2					46,96	209

Steel	●	●	●
Stainless steel	●	●	●
Cast iron	●	●	●
Non ferrous metals	●	●	●
Heat resistant alloys	●	●	●
hardened materials	●	●	●

→ v_c/f_z Page 324+325

Use the Micro mills on machines with the highest accuracy and good stability.

MultiChange Programme Overview

The highly stable "MultiChange" exchangeable head system enables an extremely fast tool change. Designed to be durable and for a very high radial run-out accuracy, this exchangeable head system is probably the most stable and precise exchangeable head system on the market. The following chapters contain suitable exchangeable heads for almost every application.

Solid carbide drilling

▲ Solid Carbide NC Spot Drill
◁ 90°, 120°, 142° / Ø 8, 10, 12, 16, 20 mm / ZEFP* 2

→ **Chapter 2, Solid carbide drills**

*ZEFP = Number of teeth

Reaming and Countersinking

▲ Through hole reamers
Ø 8–30.2 mm incl. special diameters / ZEFP* 4-6

▲ Blind hold reamers
Ø 12.2–30.2 mm incl. special diameters / ZEFP* 6

→ **Chapter 4, Reaming and countersinking**

*ZEFP = Number of teeth

Tool holder

▲ Steel Holder Extra Short
Cylindrical / Tapered 87°
Length 60–90 mm
for KLG 8, 10, 12, 16, 20 mm

▲ Short Holder Steel/Solid Carbide
cylindrical
Length 85–120 mm
for KLG 8, 10, 12, 16, 20 mm

▲ Holder Steel /Solid Carbide, Short
87° taper
Length 85–120 mm
for KLG 8, 10, 12, 16, 20 mm

▲ Solid Carbide Holder Medium
Cylindrical / Tapered 87°
Length 110–150 mm
for KLG 8, 10, 12, 16, 20 mm

▲ Holder Steel/Solid Carbide, Long
cylindrical
Length 150–200 mm
for KLG 8, 10, 12, 16, 20 mm

▲ Holder Steel/Solid Carbide, Long
87° taper
Length 150–200 mm
for KLG 8, 10, 12, 16, 20 mm

▲ Steel/Solid Carbide Holder Extra Long
cylindrical
Length 200–250 mm
For Ø 16 and 20 mm

→ **Chapter 17, Accessories**

MultiChange – PCD End Mill

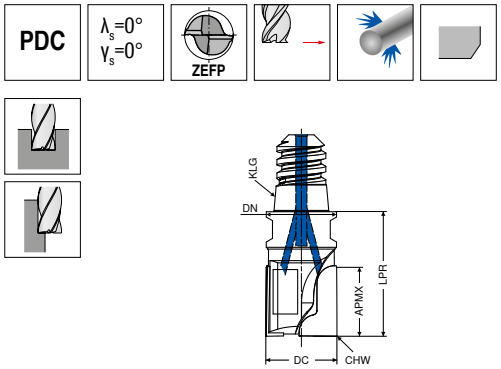

Factory standard

V8

DC mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	Article no. 52 880 ... EUR	
8	06	8	7,4	17	0,1	2	363,50	080
10	08	10	9,4	20	0,1	2	421,80	100
12	10	12	11,0	24	0,1	2	514,00	120
16	12	15	15,0	28	0,1	2	716,40	160

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 328

Other PCD MultiChange heads can be found in our online shop at cuttingtools.ceratizit.com.

MultiChange – Torus Cutter

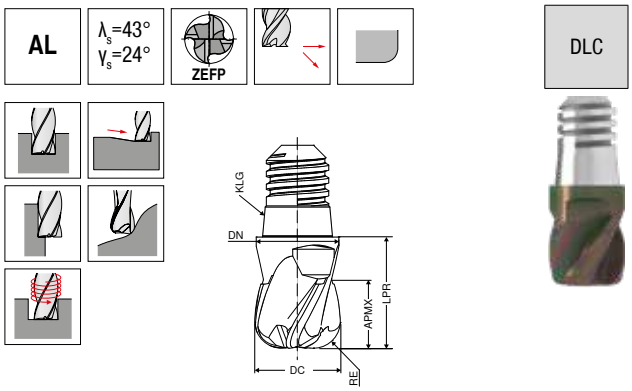

Factory standard

NEW V1

DC mm	RE mm	KLG	APMX mm	DN mm	LPR mm	ZEFP	Article no. 52 870 ... EUR	
10	0,5	08	7,5	9,8	13	3	67,70	10005
10	1,0	08	7,5	9,8	13	3	67,70	10010
12	0,5	10	9,0	11,8	16	3	79,34	12005
12	1,0	10	9,0	11,8	16	3	79,34	12010
12	2,0	10	9,0	11,8	16	3	79,34	12020
16	2,0	12	12,0	15,8	20	3	110,10	16020
16	4,0	12	12,0	15,8	20	3	110,10	16040
20	2,0	16	15,0	19,8	25	3	155,80	20020
20	3,0	16	15,0	19,8	25	3	155,80	20030
20	4,0	16	15,0	19,8	25	3	155,80	20040

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 335

MultiChange – End Mill

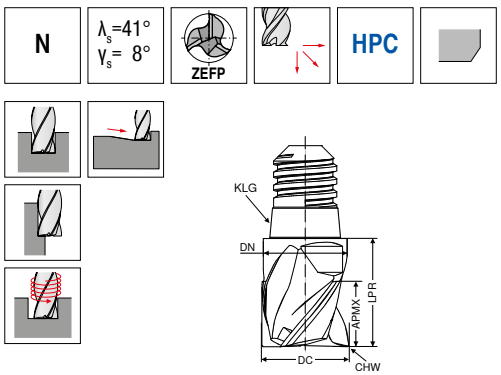

Factory standard

V1

DC mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	Article no. 52 861 ... EUR	
8	06	6,0	7,8	11	0,16	3	47,51	080
10	08	7,5	9,8	13	0,20	3	54,01	100
12	10	9,0	11,8	16	0,24	3	67,56	120
16	12	12,0	15,8	20	0,32	3	94,45	160
20	16	15,0	19,8	25	0,40	3	121,30	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 329

Assembly instructions

- KLG = Coupling Size
- SW = Across Flats Size
- M = Torque moment

KLG	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **Chapter 17, Accessories.**

Application Tips

APMX does not correspond to the maximum cutting depth

14

MultiChange – End Mill

PCR UNI | λ_s=36° γ_s=10° | ZEFP | HPC | APA72S





Factory standard

DC mm	RE mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	NEW V1 Article no. 52 871 ... EUR	
9,7	0,32	08	7,5	9,8	13	4	76,56	**09700**
10,0	0,32	08	7,5	9,8	13	4	76,56	**10000**
11,7	0,32	10	9,0	11,8	16	4	88,28	**11700**
12,0	0,32	10	9,0	11,8	16	4	88,28	**12000**
15,7	0,32	12	12,0	15,8	20	4	115,20	**15700**
16,0	0,32	12	12,0	15,8	20	4	115,20	**16000**
19,7	0,50	16	15,0	19,8	25	4	151,20	**19700**
20,0	0,50	16	15,0	19,8	25	4	151,20	**20000**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 326+327

MultiChange – End Mill

PCR ALU | λ_s=41° γ_s=15° | ZEFP | HPC | DLC





Factory standard

DC mm	RE mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	NEW V1 Article no. 52 872 ... EUR	
9,7	0,32	08	7,5	9,8	13	4	79,44	**09700**
10,0	0,32	08	7,5	9,8	13	4	79,44	**10000**
11,7	0,32	10	9,0	11,8	16	4	95,28	**11700**
12,0	0,32	10	9,0	11,8	16	4	95,28	**12000**
15,7	0,32	12	12,0	15,8	20	4	125,90	**15700**
16,0	0,32	12	12,0	15,8	20	4	125,90	**16000**
19,7	0,50	16	15,0	19,8	25	4	170,30	**19700**
20,0	0,50	16	15,0	19,8	25	4	170,30	**20000**

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 326+327

MultiChange – End Mill

N | λ_s=37° γ_s=12° | ZEFP | HPC | Ti1100





Factory standard

DC mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	V1 Article no. 52 860 ... EUR	
8	06	6,0	7,8	11	0,16	4	51,58	**080**
10	08	7,5	9,8	13	0,20	4	57,87	**100**
12	10	9,0	11,8	16	0,24	4	73,62	**120**
16	12	12,0	15,8	20	0,32	4	105,50	**160**
20	16	15,0	19,8	25	0,40	4	136,80	**200**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 329

Assembly instructions

- KLG = Coupling Size
- SW = Across Flats Size
- M = Torque moment

KLG	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **Chapter 17, Accessories.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Roughing-Finishing Cutter

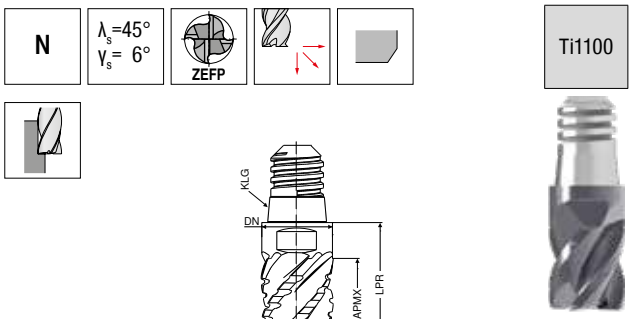

Factory standard

DC mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	V1 Article no. 52 862 ... EUR	
8	06	10,0	7,8	15	0,16	4	59,19	080
10	08	12,5	9,8	18	0,20	4	61,61	100
12	10	15,0	11,8	22	0,24	4	83,76	120
16	12	20,0	15,8	28	0,32	5	127,80	160
20	16	25,0	19,8	35	0,40	6	172,00	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 330

MultiChange – Finish milling cutter

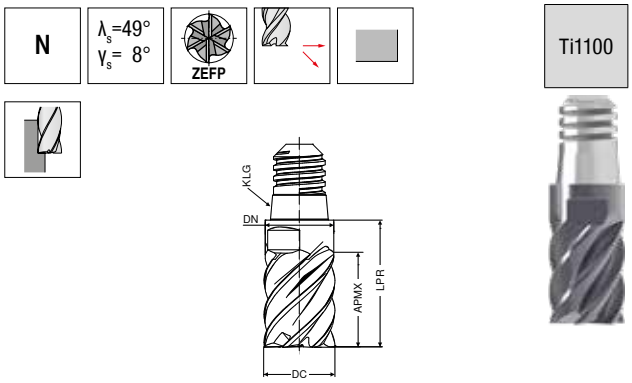

Factory standard

DC mm	KLG	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	V1 Article no. 52 863 ... EUR	
8	06	10,0	7,8	15	6	52,79	080
10	08	12,5	9,8	18	6	59,63	100
12	10	15,0	11,8	22	6	74,72	120
16	12	20,0	15,8	28	6	116,80	160
20	16	25,0	19,8	35	6	161,00	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 332

MultiChange – High Feed Cutter

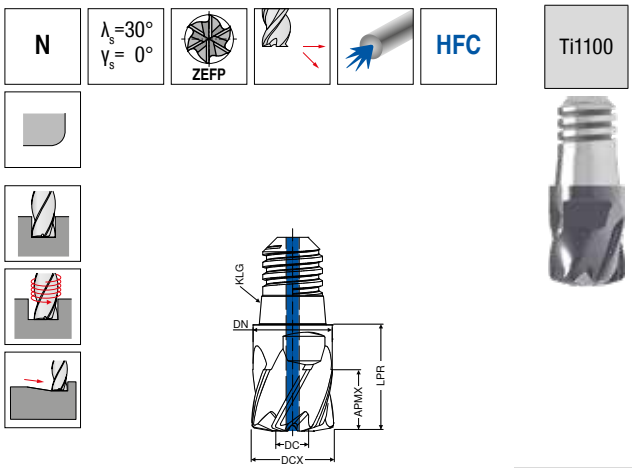

Factory standard

DCX mm	KLG	r_{3D} mm	APMX mm	LPR ±0,02 mm	ZEFP	V1 Article no. 52 864 ... EUR	
8	06	0,7	6,0	11	6	51,58	080
10	08	0,9	7,5	13	6	57,87	100
12	10	1,0	9,0	16	6	73,62	120
16	12	1,4	12,0	20	6	105,50	160
20	16	1,7	15,0	25	6	136,80	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	
hardened materials	○

→ v_c/f_z Page 331

- ▲ r_{3D} = corner radius to be programmed
- ▲ Ø DCX tapered by 0.2 mm, resulting in Ø DN
- ▲ Ø DCX halved, resulting in Ø DC

Assembly instructions

- ▲ KLG = Coupling Size
- ▲ SW = Across Flats Size
- ▲ M = Torque moment

KLG	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **Chapter 17, Accessories.**

Application Tips

APMX does not correspond to the maximum cutting depth

14

MultiChange – Ball Nosed Cutter

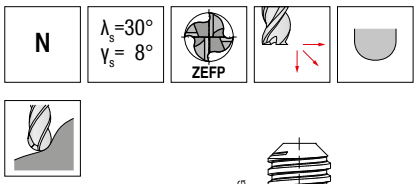



Ti1100

Factory standard

DC	KLG	APMX	DN	LPR ±0,02	ZEFP	V1 Article no. 52 866 ...	
mm		mm	mm	mm		EUR	
10	08	7,5	9,8	13	4	60,07	100
12	10	9,0	11,8	16	4	74,84	120
16	12	12,0	15,8	20	4	112,40	160
20	16	15,0	19,8	25	4	137,80	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 333+334

MultiChange – Torus Cutter





Ti1100

Factory standard

DC	KLG	APMX	DN	LPR ±0,02	RE	ZEFP	V1 Article no. 52 865 ...	
mm		mm	mm	mm	mm		EUR	
8	06	6,0	7,8	11	1,0	4	47,51	081
8	06	6,0	7,8	11	2,0	4	47,51	082
10	08	7,5	9,8	13	1,5	4	54,01	101
10	08	7,5	9,8	13	3,0	4	54,01	103
12	10	9,0	11,8	16	1,5	4	67,56	121
12	10	9,0	11,8	16	4,0	4	67,56	124
16	12	12,0	15,8	20	2,0	4	100,40	162
16	12	12,0	15,8	20	5,0	4	100,40	165
20	16	15,0	19,8	25	2,0	4	135,50	202
20	16	15,0	19,8	25	6,0	4	135,50	206

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 333+334

MultiChange – Quarter-round milling cutter





Ti1100

Factory standard

DCX	KLG	PRFRAD ±0,03	APMX	DC	LPR ±0,02	LH	V1 Article no. 52 869 ...	
mm		mm	mm	mm	mm	mm	EUR	
8	06	0,5	2,0	6,63	11	4,5	69,54	080
8	06	1,0	3,0	5,69	11	5,0	69,54	081
10	08	1,5	4,0	6,63	13	6,5	74,62	100
10	08	2,0	4,5	5,69	13	7,0	74,62	101
12	10	2,5	5,5	6,65	16	8,5	90,15	120
12	10	3,0	6,0	5,70	16	9,0	90,15	121
12	10	3,5	6,5	4,76	16	9,5	90,15	122
16	12	4,0	8,0	7,60	20	12,0	127,80	160
16	12	4,5	8,5	6,68	20	12,5	127,80	161
16	12	5,0	9,0	5,74	20	13,0	127,80	162
20	16	5,0	10,0	9,53	25	15,0	172,00	200
20	16	6,0	11,0	7,64	25	16,0	172,00	201

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 336

Assembly instructions

- KLG = Coupling Size
- SW = Across Flats Size
- M = Torque moment

KLG	SW	M
	mm	Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **Chapter 17, Accessories.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Deburring Cutter





Ti1050

Factory standard

V1

DCX mm	KLG	APMX mm	DC mm	DN mm	LPR ±0,02 mm	ZEFP	Article no. 52 867 ... EUR	
10	08	7,5	0,0	9,8	13	4	48,83	100
12	10	9,0	0,0	11,8	16	4	63,16	120
16	12	12,0	6,4	15,8	20	6	83,99	160
20	16	15,0	8,0	19,8	25	6	111,30	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 337

MultiChange – Deburring Cutter





Ti1100

Factory standard

V1

DCX mm	KLG	APMX mm	DC mm	DN mm	LPR ±0,02 mm	ZEFP	Article no. 52 868 ... EUR	
10	06	4,8	7,5	8	11	6	54,01	100
12	08	5,5	9,0	10	13	6	67,56	120
16	10	8,0	12,0	12	16	6	94,45	160
20	12	9,5	15,0	16	20	6	121,30	200

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 337

Assembly instructions

- KLG = Coupling Size
- SW = Across Flats Size
- M = Torque moment

KLG	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **Chapter 17, Accessories.**

Application Tips

APMX does not correspond to the maximum cutting depth

End milling cutter

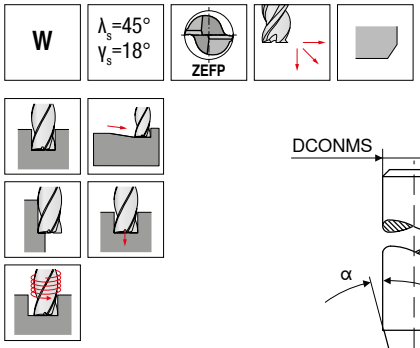

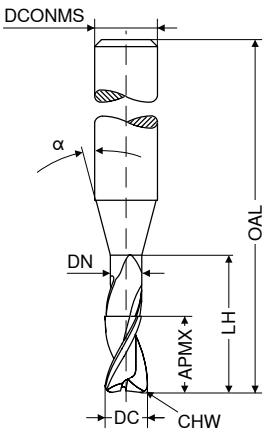

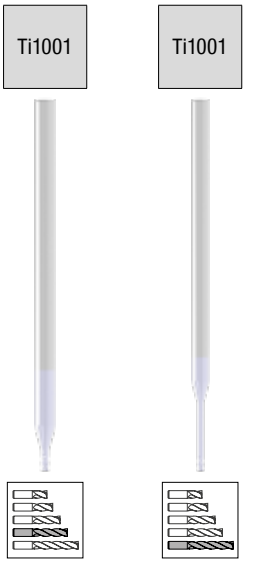

DC f8	APMX	DN	LH	OAL	α°	DCONMS h5	CHW	ZEFP	Factory standard HA V0 Article no. 50 900 ... EUR		Factory standard HA V0 Article no. 50 900 ... EUR	
mm	mm	mm	mm	mm		mm	mm					
0,2	0,2	0,18	0,6	55	15	3	0,02	2	75,39	**021**		
0,2	0,2	0,18	1,0	55	15	3	0,02	2	76,16	**022**		
0,2	0,2	0,18	1,6	55	15	3	0,02	2	76,81	**023**		
0,2	0,2	0,18	2,0	55	15	3	0,02	2	78,04	**024**		
0,3	0,3	0,28	0,9	55	15	3	0,03	2	75,39	**031**		
0,3	0,3	0,28	1,5	55	15	3	0,03	2	76,16	**032**		
0,3	0,3	0,28	2,4	55	15	3	0,03	2	76,81	**033**		
0,3	0,3	0,28	3,0	55	15	3	0,03	2	78,04	**034**		
0,4	0,4	0,37	1,2	55	15	3	0,04	2	75,39	**041**		
0,4	0,4	0,37	2,0	55	15	3	0,04	2	76,16	**042**		
0,4	0,4	0,37	3,2	55	15	3	0,04	2	76,81	**043**		
0,4	0,4	0,37	4,0	55	15	3	0,04	2	78,04	**044**		
0,5	0,5	0,45	1,5	55	15	3	0,05	2	73,74	**051**		
0,5	0,5	0,45	2,5	55	15	3	0,05	2	74,39	**052**		
0,5	0,5	0,45	4,0	55	15	3	0,05	2	75,39	**053**		
0,5	0,5	0,45	5,0	55	15	3	0,05	2	76,16	**054**		
0,6	0,6	0,58	2,0	55	15	3	0,06	2	63,48	**061**		
0,6	0,6	0,58	3,0	55	15	3	0,06	2	61,71	**062**		
0,6	0,6	0,58	5,0	65	15	3	0,06	2			67,34	**063**
0,6	0,6	0,58	6,0	65	15	3	0,06	2			71,42	**064**
0,8	0,8	0,77	2,5	55	15	3	0,08	2	61,71	**081**		
0,8	0,8	0,77	4,0	55	15	3	0,08	2	61,71	**082**		
0,8	0,8	0,77	6,5	65	15	3	0,08	2			68,66	**083**
0,8	0,8	0,77	8,0	65	15	3	0,08	2			71,42	**084**
1,0	1,0	0,95	3,0	55	15	3	0,10	2	61,71	**101**		
1,0	1,0	0,95	5,0	55	15	3	0,10	2	61,71	**102**		
1,0	1,0	0,95	8,0	65	15	3	0,10	2			65,24	**103**
1,0	1,0	0,95	10,0	65	15	3	0,10	2			71,42	**104**
1,0	1,0	0,95	12,0	65	15	3	0,10	2			73,07	**105**
1,2	1,2	1,15	3,0	55	15	3	0,12	2	61,71	**121**		
1,2	1,2	1,15	6,0	55	15	3	0,12	2	61,71	**122**		
1,2	1,2	1,15	10,0	65	15	3	0,12	2			68,66	**123**
1,2	1,2	1,15	12,0	65	15	3	0,12	2			71,42	**124**
1,3	1,3	1,25	4,0	55	15	3	0,12	2	61,71	**131**		
1,3	1,3	1,25	7,0	55	15	3	0,12	2	63,48	**132**		
1,3	1,3	1,25	11,0	65	15	3	0,12	2			68,66	**133**
1,3	1,3	1,25	13,0	65	15	3	0,12	2			73,07	**134**
1,5	1,5	1,44	5,0	55	15	3	0,12	2	63,48	**151**		
1,5	1,5	1,44	7,5	55	15	3	0,12	2	61,71	**152**		
1,5	1,5	1,44	12,0	65	15	3	0,12	2			73,07	**153**
1,5	1,5	1,44	15,0	65	15	3	0,12	2			71,42	**154**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 350–355

Continued on next page

End milling cutter

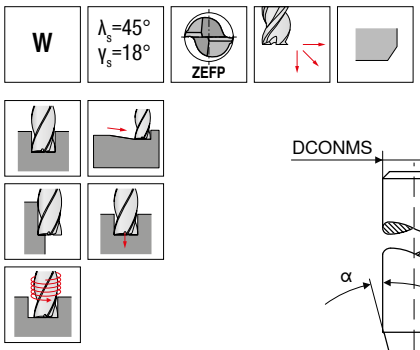

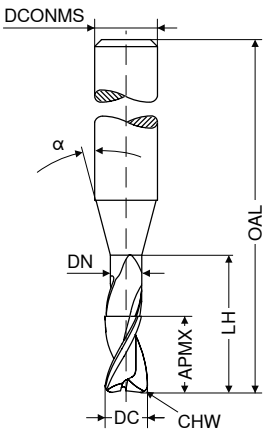

DC f8	APMX	DN	LH	OAL	α°	DCONMS h5	CHW	ZEFP	Factory standard HA V0 Article no. 50 900 ... EUR		Factory standard HA V0 Article no. 50 900 ... EUR	
mm	mm	mm	mm	mm		mm	mm					
1,6	1,6	1,52	5,0	55	15	3	0,12	2	63,48	**161**		
1,6	1,6	1,52	8,0	55	15	3	0,12	2	63,48	**162**		
1,6	1,6	1,52	13,0	65	15	3	0,12	2			68,66	**163**
1,6	1,6	1,52	16,0	65	15	3	0,12	2			73,07	**164**
1,8	1,8	1,72	5,5	55	15	3	0,12	2	61,71	**181**		
1,8	1,8	1,72	9,0	55	15	3	0,12	2	63,48	**182**		
1,8	1,8	1,72	14,5	65	15	3	0,12	2			68,66	**183**
1,8	1,8	1,72	18,0	65	15	3	0,12	2			73,07	**184**
2,0	2,0	1,92	6,0	55	15	3	0,13	2	61,71	**201**		
2,0	2,0	1,92	10,0	55	15	3	0,13	2	61,71	**202**		
2,0	2,0	1,92	14,0	55	15	3	0,13	2	65,24	**203**		
2,0	2,0	1,92	16,0	65	15	3	0,13	2			73,07	**204**
2,0	2,0	1,92	20,0	65	15	3	0,13	2			71,42	**205**
2,3	2,3	2,22	7,0	55	15	3	0,13	2	61,71	**231**		
2,3	2,3	2,22	11,5	55	15	3	0,13	2	63,48	**232**		
2,3	2,3	2,22	18,5	65	15	3	0,13	2			65,24	**233**
2,3	2,3	2,22	20,0	65	15	3	0,13	2			73,07	**234**
2,3	2,3	2,22	23,0	65	15	3	0,13	2			73,07	**235**
3,0	3,0	2,90	9,0	65	15	6	0,15	2	65,24	**301**		
3,0	3,0	2,90	15,0	65	15	6	0,15	2	73,07	**302**		
3,0	3,0	2,90	24,0	100	15	6	0,15	2			79,25	**303**
3,0	3,0	2,90	30,0	100	15	6	0,15	2			82,67	**304**
4,0	4,0	3,90	12,0	65	15	6	0,15	2	73,07	**401**		
4,0	4,0	3,90	20,0	65	15	6	0,15	2	73,07	**402**		
4,0	4,0	3,90	32,0	100	15	6	0,15	2			82,67	**403**
4,0	4,0	3,90	40,0	100	15	6	0,15	2			85,09	**404**
5,0	5,0	4,90	15,0	65	15	6	0,15	2	73,07	**501**		
5,0	5,0	4,90	25,0	65	15	6	0,15	2	73,07	**502**		
5,0	5,0	4,90	40,0	100	15	6	0,15	2			85,09	**503**
5,0	5,0	4,90	50,0	100	15	6	0,15	2			89,39	**504**
6,0	6,0	5,90	18,0	65	15	6	0,15	2	73,07	**601**		
6,0	6,0	5,90	30,0	100	15	6	0,15	2			82,67	**602**
6,0	6,0	5,90	48,0	100	15	6	0,15	2			89,39	**603**
6,0	6,0	5,90	60,0	100	15	6	0,15	2			92,14	**604**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 350–355

14

End milling cutter

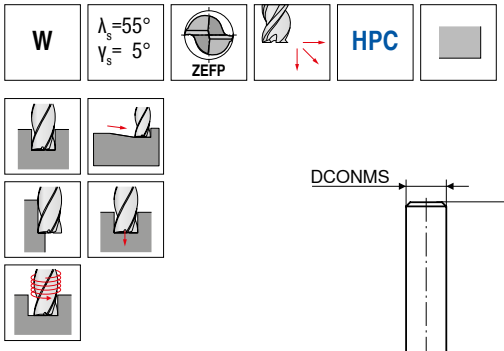

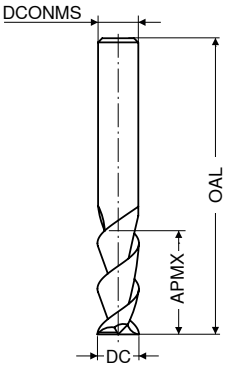

≈DIN 6527

HA

V0

DC h6 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 50 960 ... EUR	
3	12	50	3	2	15,87	030
4	15	50	4	2	18,08	040
5	20	50	5	2	19,62	050
6	20	57	6	2	21,49	060
8	20	63	8	2	31,86	080
10	25	73	10	2	50,14	100
12	25	83	12	2	65,79	120
14	30	83	14	2	114,60	140
16	30	92	16	2	120,10	160
20	38	104	20	2	169,70	200

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 338+339

End milling cutter

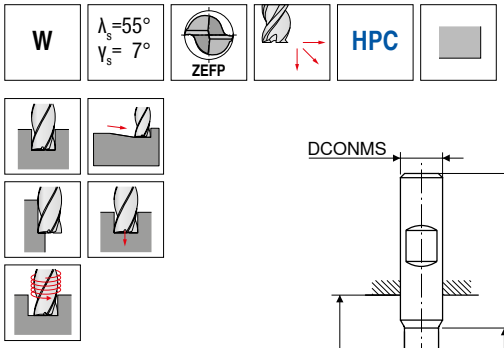

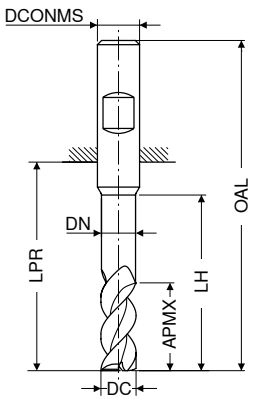

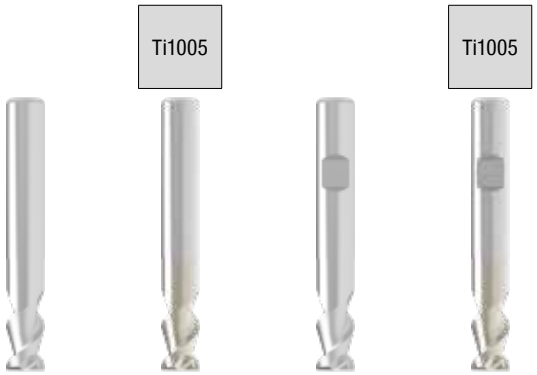

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Factory standard HA V0 Article no. 54 590 ...		Factory standard HA V0 Article no. 54 592 ...		Factory standard HB V0 Article no. 54 591 ...		Factory standard HB V0 Article no. 54 593 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
2,7	5,0	2,5	12	19	55	6	2	23,25	027	34,16	027	23,25	027	34,16	027
3,0	3,5	2,8	12	19	55	6	2	23,91	033	34,72	033				
3,0	5,0	2,8	12	19	55	6	2	23,25	031	34,16	031	23,25	031	34,16	031
3,7	6,5	3,5	12	19	55	6	2	23,25	037	34,16	037	23,25	037	34,16	037
4,0	4,5	3,8	12	19	55	6	2	23,91	043	34,72	043				
4,0	6,5	3,8	12	19	55	6	2	23,25	041	34,16	041	23,25	041	34,16	041
4,7	8,0	4,5	15	22	58	6	2	23,25	047	34,16	047	23,25	047	34,16	047
5,0	5,5	4,8	15	22	58	6	2	23,91	053	34,72	053				
5,0	8,0	4,8	15	22	58	6	2	23,25	051	34,16	051	23,25	051	34,16	051
5,7	10,0	5,5	18	22	58	6	2	23,25	057	34,16	057	23,25	057	34,16	057
6,0	7,0	5,8	18	22	58	6	2	23,91	063	34,72	063				
6,0	10,0	5,8	18	22	58	6	2	23,25	061	34,16	061	23,25	061	34,16	061
6,7	13,0	6,4	24	28	64	8	2	34,16	067	46,51	067	34,16	067	46,51	067
7,0	13,0	6,7	24	28	64	8	2	34,16	071	46,51	071	34,16	071	46,51	071
7,7	13,0	7,4	24	28	64	8	2	34,16	077	46,51	077	34,16	077	46,51	077
8,0	9,0	7,7	24	28	64	8	2	34,16	083	46,51	083				
8,0	13,0	7,7	24	28	64	8	2	34,16	081	46,51	081	34,16	081	46,51	081
8,7	16,0	8,4	30	34	74	10	2	54,01	087	67,89	087	54,01	087	67,89	087
9,0	16,0	8,7	30	34	74	10	2	54,01	091	67,89	091	54,01	091	67,89	091
9,7	16,0	9,4	30	34	74	10	2	54,01	097	67,89	097	54,01	097	67,89	097
10,0	11,0	9,7	30	34	74	10	2	54,01	103	67,89	103				
10,0	16,0	9,7	30	34	74	10	2	54,01	101	67,89	101	54,01	101	67,89	101
10,7	19,0	10,3	36	40	85	12	2	71,65	107	85,20	107	71,65	107	85,20	107
11,0	19,0	10,6	36	40	85	12	2	71,65	111	85,20	111	71,65	111	85,20	111
11,7	19,0	11,3	36	40	85	12	2	71,65	117	85,20	117	71,65	117	85,20	117
12,0	13,0	11,6	36	40	85	12	2	71,65	123	85,20	123				
12,0	19,0	11,6	36	40	85	12	2	71,65	121	85,20	121	71,65	121	85,20	121
13,0	22,0	12,6	42	46	91	14	2	104,40	131	120,10	131	104,40	131	120,10	131
13,7	22,0	13,3	42	46	91	14	2	104,40	137	120,10	137	104,40	137	120,10	137
14,0	15,0	13,6	42	46	91	14	2	104,40	143	120,10	143				
14,0	22,0	13,6	42	46	91	14	2	104,40	141	120,10	141	104,40	141	120,10	141
15,0	25,0	14,5	48	52	100	16	2	168,60	151	192,80	151	168,60	151	192,80	151
15,7	25,0	15,2	48	52	100	16	2	168,60	157	192,80	157	168,60	157	192,80	157
16,0	17,0	15,5	48	52	100	16	2	168,60	163	192,80	163				
16,0	25,0	15,5	48	52	100	16	2	168,60	161	192,80	161	168,60	161	192,80	161
18,0	20,0	17,5	54	58	106	18	2	216,00	183	251,30	183				
18,0	29,0	17,5	54	58	106	18	2	217,10	181	238,10	181	217,10	181	238,10	181
19,7	32,0	19,2	60	64	114	20	2	237,00	197	253,60	197	237,00	197	262,30	197
20,0	22,0	19,5	60	64	114	20	2	228,10	203	250,20	203				
20,0	32,0	19,5	60	64	114	20	2	237,00	201	253,60	201	237,00	201	253,60	201
24,7	40,0	24,2	75	80	136	25	2	364,80	247	384,60	247	364,80	247	384,60	247
25,0	27,0	24,5	75	80	136	25	2	345,10	253	365,90	253				
25,0	40,0	24,5	75	80	136	25	2	364,80	251	384,60	251	364,80	251	384,60	251

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 338+339

14

End milling cutter

W | λ_s=55° γ_s= 7° | ZEFP | HPC





LPR with Shank DIN 6535 HB

								Factory standard HA V0		Factory standard HA V0		Factory standard HB V0		Factory standard HB V0		Factory standard HA V0		Factory standard HA V0	
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 54 590 ...		Article no. 54 592 ...		Article no. 54 591 ...		Article no. 54 593 ...		Article no. 54 590 ...		Article no. 54 592 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
2,7	8,0	2,5	15	22	58	6	2	27,01	028	37,80	028	27,01	028	37,80	028				
3,0	3,5	2,8	15	22	58	6	2	25,57	034	36,48	034								
3,0	8,0	2,8	15	22	58	6	2	27,01	032	37,80	032	27,01	032	37,80	032				
3,0	3,5	2,8	24	31	67	6	2									31,96	035	42,76	035
3,7	10,5	3,5	20	26	62	6	2	27,01	038	37,80	038	27,01	038	37,80	038				
4,0	4,5	3,8	20	26	62	6	2	25,57	044	36,48	044								
4,0	10,5	3,8	20	26	62	6	2	27,01	042	37,80	042	27,01	042	37,80	042				
4,0	4,5	3,8	32	38	74	6	2									31,96	045	42,76	045
4,7	13,0	4,5	25	34	70	6	2	27,01	048	37,80	048	27,01	048	37,80	048				
5,0	5,5	4,8	25	34	70	6	2	25,57	054	36,48	054								
5,0	13,0	4,8	25	34	70	6	2	27,01	052	37,80	052	27,01	052	37,80	052				
5,0	5,5	4,8	40	52	88	6	2									32,73	055	43,43	055
5,7	16,0	5,5	30	34	70	6	2	27,01	058	37,80	058	27,01	058	37,80	058				
6,0	7,0	5,8	30	34	70	6	2	25,57	064	36,48	064								
6,0	16,0	5,8	30	34	70	6	2	27,01	062	37,80	062	27,01	062	37,80	062				
6,0	7,0	5,8	48	52	88	6	2									32,73	065	43,43	065
6,7	21,0	6,4	40	44	80	8	2	38,69	068	50,69	068	38,69	068	50,69	068				
7,0	21,0	6,7	40	44	80	8	2	38,69	072	50,69	072	38,69	072	50,69	072				
7,7	21,0	7,4	40	44	80	8	2	38,69	078	50,69	078	38,69	078	50,69	078				
8,0	9,0	7,7	40	44	80	8	2	37,59	084	49,71	084								
8,0	21,0	7,7	40	44	80	8	2	38,69	082	50,69	082	38,69	082	50,69	082				
8,0	9,0	7,7	64	68	104	8	2									48,50	085	60,94	085
8,7	26,0	8,4	50	54	94	10	2	61,06	088	74,84	088	61,06	088	74,84	088				
9,0	26,0	8,7	50	54	94	10	2	61,06	092	74,84	092	61,06	092	74,84	092				
9,7	26,0	9,4	50	54	94	10	2	61,06	098	74,84	098	61,06	098	74,84	098				
10,0	11,0	9,7	50	54	94	10	2	59,40	104	73,29	104								
10,0	26,0	9,7	50	54	94	10	2	61,06	102	74,84	102	61,06	102	74,84	102				
10,0	11,0	9,7	80	84	124	10	2									98,86	105	115,80	105
10,7	31,0	10,3	60	64	109	12	2	100,50	108	119,10	108	100,50	108	119,10	108				
11,0	31,0	10,6	60	64	109	12	2	100,50	112	119,10	112	100,50	112	119,10	112				
11,7	31,0	11,3	60	64	109	12	2	100,50	118	119,10	118	100,50	118	119,10	118				
12,0	13,0	11,6	60	64	109	12	2	98,64	124	116,80	124								
12,0	31,0	11,6	60	64	109	12	2	100,50	122	119,10	122	100,50	122	119,10	122				
12,0	13,0	11,6	96	100	145	12	2									130,00	125	145,50	125
13,0	36,0	12,6	70	74	119	14	2	145,50	132	165,40	132	145,50	132	165,40	132				
13,7	36,0	13,3	70	74	119	14	2	145,50	138	168,60	138	145,50	138	165,40	138				
14,0	15,0	13,6	70	74	119	14	2	144,40	144	164,20	144								
14,0	36,0	13,6	70	74	119	14	2	145,50	142	165,40	142	145,50	142	165,40	142				

Steel						
Stainless steel						
Cast iron						
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys						
hardened materials						

→ v_c/f_z Page 338+339

Continued on next page

End milling cutter

W | λ_s=55° γ_s= 7° | ZEFP | HPC





LPR with Shank DIN 6535 HB

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Factory standard HA V0 Article no. 54 590 ... EUR		Factory standard HA V0 Article no. 54 592 ... EUR		Factory standard HB V0 Article no. 54 591 ... EUR		Factory standard HB V0 Article no. 54 593 ... EUR		Factory standard HA V0 Article no. 54 590 ... EUR		Factory standard HA V0 Article no. 54 592 ... EUR	
mm	mm	mm	mm	mm	mm	mm													
14,0	15,0	13,6	112	116	161	14	2									192,80	**145**	212,80	**145**
15,0	41,0	14,5	80	84	132	16	2	189,60	**152**	212,80	**152**	189,60	**152**	212,80	**152**				
15,7	41,0	15,2	80	84	132	16	2	189,60	**158**	212,80	**158**	189,60	**158**	212,80	**158**				
16,0	17,0	15,5	80	84	132	16	2	187,30	**164**	206,10	**164**								
16,0	41,0	15,5	80	84	132	16	2	189,60	**162**	212,80	**162**	189,60	**162**	212,80	**162**				
16,0	17,0	15,5	128	132	180	16	2									250,20	**165**	272,30	**165**
18,0	20,0	17,5	90	94	142	18	2	235,90	**184**	255,70	**184**								
18,0	47,0	17,5	90	94	142	18	2	246,90	**182**	268,80	**182**	246,90	**182**	268,80	**182**				
18,0	20,0	17,5	144	148	196	18	2									318,60	**185**	338,30	**185**
19,7	52,0	19,2	100	104	154	20	2	270,10	**198**	295,40	**198**	270,10	**198**	295,40	**198**				
20,0	22,0	19,5	100	104	154	20	2	251,30	**204**	277,80	**204**								
20,0	52,0	19,5	100	104	154	20	2	270,10	**202**	295,40	**202**	270,10	**202**	295,40	**202**				
20,0	22,0	19,5	160	164	214	20	2									347,20	**205**	373,60	**205**
24,7	65,0	24,2	125	130	186	25	2	503,70	**248**	524,60	**248**	503,70	**248**	524,60	**248**				
25,0	27,0	24,5	125	130	186	25	2	486,10	**254**	505,90	**254**								
25,0	65,0	24,5	125	130	186	25	2	503,70	**252**	524,60	**252**	503,70	**252**	524,60	**252**				
25,0	27,0	24,5	200	204	260	25	2									686,60	**255**	709,80	**255**

Steel						
Stainless steel						
Cast iron						
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys						
hardened materials						

→ v_c/f_z Page 338+339

14

End milling cutter with corner radius

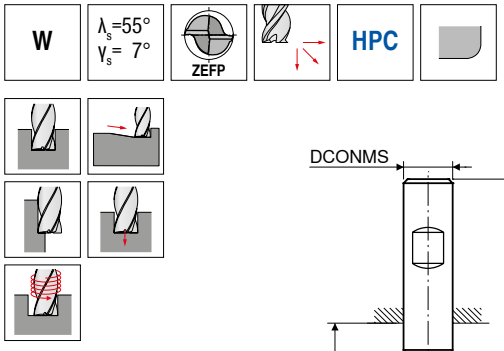

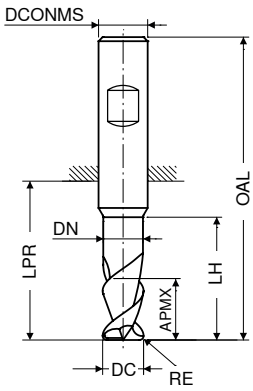

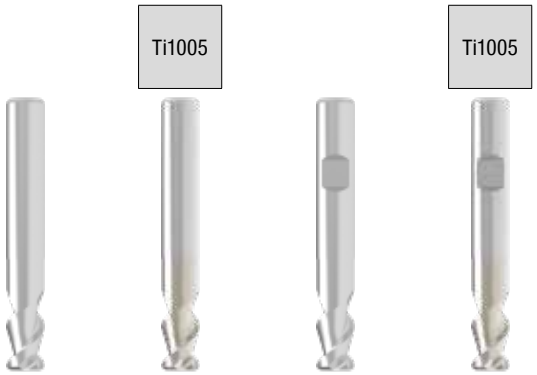

									Factory standard		Factory standard		Factory standard		Factory standard	
									HA		HA		HB		HB	
									V0		V0		V0		V0	
DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 54 594 ...		Article no. 54 596 ...		Article no. 54 595 ...		Article no. 54 597 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	0,2	5,0	2,8	12	19	55	6	2	26,46	031	37,14	031	26,46	031	37,14	031
3	0,3	5,0	2,8	12	19	55	6	2	26,46	033	37,14	033	26,46	033	37,14	033
3	0,5	5,0	2,8	12	19	55	6	2	26,46	035	37,14	035	26,46	035	37,14	035
4	0,3	6,5	3,8	12	19	55	6	2	26,46	041	37,14	041	26,46	041	37,14	041
4	0,5	6,5	3,8	12	19	55	6	2	26,46	043	37,14	043	26,46	043	37,14	043
4	1,0	6,5	3,8	12	19	55	6	2	26,46	045	37,14	045	26,46	045	37,14	045
5	0,3	8,0	4,8	15	22	58	6	2	27,01	051	37,80	051	27,01	051	37,80	051
5	0,5	8,0	4,8	15	22	58	6	2	27,01	053	37,80	053	27,01	053	37,80	053
5	1,0	8,0	4,8	15	22	58	6	2	27,01	055	37,80	055	27,01	055	37,80	055
6	0,3	10,0	5,8	18	22	58	6	2	27,44	061	38,24	061	27,44	061	38,24	061
6	0,5	10,0	5,8	18	22	58	6	2	27,44	063	38,24	063	27,44	063	38,24	063
6	1,0	10,0	5,8	18	22	58	6	2	27,44	065	38,24	065	27,44	065	38,24	065
8	0,3	13,0	7,7	24	28	64	8	2	37,80	081	50,26	081	37,80	081	50,26	081
8	0,5	13,0	7,7	24	28	64	8	2	37,80	083	50,26	083	37,80	083	50,26	083
8	1,0	13,0	7,7	24	28	64	8	2	37,80	085	50,26	085	37,80	085	50,26	085
10	0,3	16,0	9,7	30	34	74	10	2	57,42	101	71,42	101	57,42	101	71,42	101
10	1,0	16,0	9,7	30	34	74	10	2	57,42	103	71,42	103	57,42	103	71,42	103
10	1,5	16,0	9,7	30	34	74	10	2	57,42	105	71,42	105	57,42	105	71,42	105
12	1,0	19,0	11,6	36	40	85	12	2	75,39	121	89,06	121	75,39	121	89,06	121
12	1,5	19,0	11,6	36	40	85	12	2	75,39	123	89,06	123	75,39	123	89,06	123
12	2,0	19,0	11,6	36	40	85	12	2	75,39	125	89,06	125	75,39	125	89,06	125
16	2,0	25,0	15,5	48	52	100	16	2	175,20	161	196,30	161	175,20	161	196,30	161
16	2,5	25,0	15,5	48	52	100	16	2	176,30	163	197,30	163	176,30	163	197,30	163
16	3,0	25,0	15,5	48	52	100	16	2	176,30	165	197,30	165	176,30	165	197,30	165
20	2,0	32,0	19,5	60	64	114	20	2	239,10	201	266,80	201	232,50	201	266,80	201
20	2,5	32,0	19,5	60	64	114	20	2	239,10	203	266,80	203	239,10	203	266,80	203
20	3,0	32,0	19,5	60	64	114	20	2	239,10	205	266,80	205	239,10	205	266,80	205
20	4,0	32,0	19,5	60	64	114	20	2	239,10	206	266,80	206	239,10	206	266,80	206
25	2,0	40,0	24,5	75	80	136	25	2	367,00	251	388,00	251	367,00	251	388,00	251
25	4,0	40,0	24,5	75	80	136	25	2	368,20	253	388,00	253	368,20	253	388,00	253

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 338+339

End milling cutter with corner radius

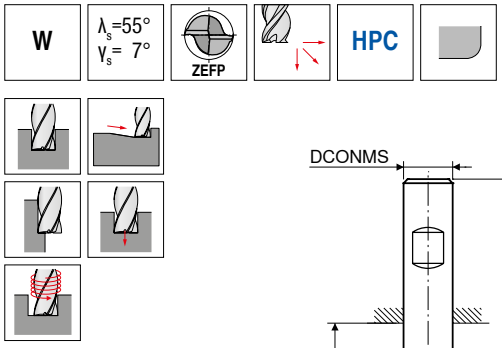

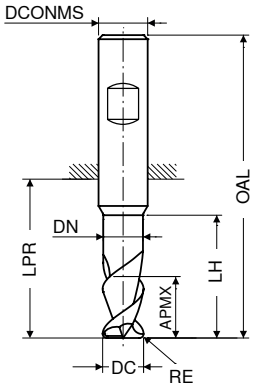

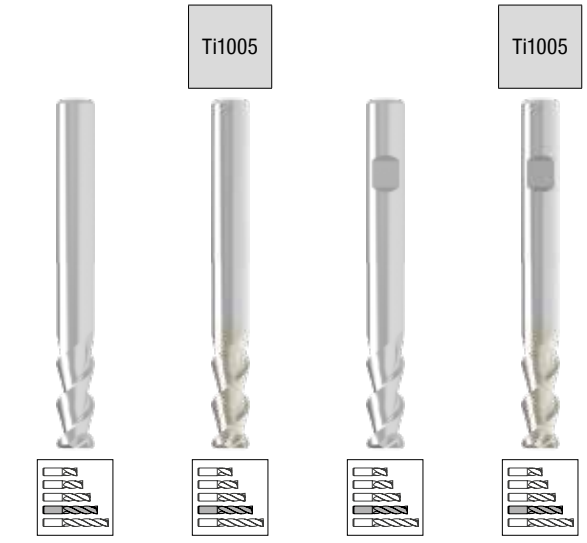

DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Factory standard HA V0 Article no. 54 594 ...		Factory standard HA V0 Article no. 54 596 ...		Factory standard HB V0 Article no. 54 595 ...		Factory standard HB V0 Article no. 54 597 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	0,2	8,0	2,8	15	22	58	6	2	26,46	032	37,14	032	26,46	032	37,14	032
3	0,3	8,0	2,8	15	22	58	6	2	26,46	034	37,14	034	26,46	034	37,14	034
3	0,5	8,0	2,8	15	22	58	6	2	26,46	036	37,14	036	26,46	036	37,14	036
4	0,3	10,5	3,8	20	26	62	6	2	27,88	042	38,69	042	27,88	042	38,69	042
4	0,5	10,5	3,8	20	26	62	6	2	27,88	044	38,69	044	27,88	044	38,69	044
4	1,0	10,5	3,8	20	26	62	6	2	27,88	046	38,69	046	27,88	046	38,69	046
5	0,3	13,0	4,8	25	34	70	6	2	30,20	052	41,22	052	30,20	052	41,22	052
5	0,5	13,0	4,8	25	34	70	6	2	30,20	054	41,22	054	30,20	054	41,22	054
5	1,0	13,0	4,8	25	34	70	6	2	30,20	056	41,22	056	30,20	056	41,22	056
6	0,3	16,0	5,8	30	34	70	6	2	30,20	062	41,22	062	30,20	062	41,22	062
6	0,5	16,0	5,8	30	34	70	6	2	30,20	064	41,22	064	30,20	064	41,22	064
6	1,0	16,0	5,8	30	34	70	6	2	30,20	066	41,22	066	30,20	066	41,22	066
8	0,3	21,0	7,7	40	44	80	8	2	42,11	082	54,56	082	42,11	082	54,56	082
8	0,5	21,0	7,7	40	44	80	8	2	42,11	084	54,56	084	42,11	084	54,56	084
8	1,0	21,0	7,7	40	44	80	8	2	42,11	086	54,56	086	42,11	086	54,56	086
10	0,5	26,0	9,7	50	54	94	10	2	64,47	102	78,47	102	64,47	102	78,47	102
10	1,0	26,0	9,7	50	54	94	10	2	64,47	104	78,47	104	64,47	104	78,47	104
10	1,5	26,0	9,7	50	54	94	10	2	64,47	106	78,47	106	64,47	106	78,47	106
12	1,0	31,0	11,6	60	64	109	12	2	105,30	122	123,50	122	105,30	122	123,50	122
12	1,5	31,0	11,6	60	64	109	12	2	105,30	124	123,50	124	105,30	124	123,50	124
12	2,0	31,0	11,6	60	64	109	12	2	105,30	126	123,50	126	105,30	126	123,50	126
16	2,0	41,0	15,5	80	84	132	16	2	198,30	162	220,50	162	198,30	162	220,50	162
16	2,5	41,0	15,5	80	84	132	16	2	199,50	164	222,60	164	199,50	164	222,60	164
16	4,0	41,0	15,5	80	84	132	16	2	199,50	166	222,60	166	199,50	166	222,60	166
20	2,0	52,0	19,5	100	104	154	20	2	274,50	202	300,90	202	274,50	202	300,90	202
20	2,5	52,0	19,5	100	104	154	20	2	275,60	204	302,00	204	275,60	204	302,00	204
20	4,0	52,0	19,5	100	104	154	20	2	275,60	207	302,00	207	275,60	207	302,00	207
25	2,0	65,0	24,5	125	130	186	25	2	512,50	252	532,40	252	512,50	252	532,40	252
25	4,0	65,0	24,5	125	130	186	25	2	512,50	254	532,40	254	512,50	254	532,40	254

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 338+339

Slot milling cutter

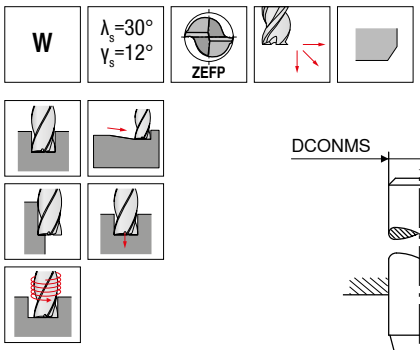

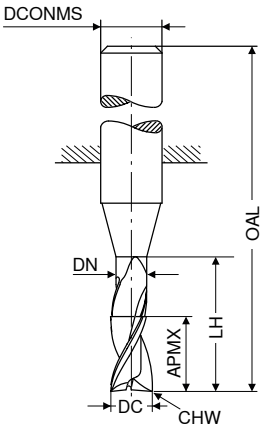

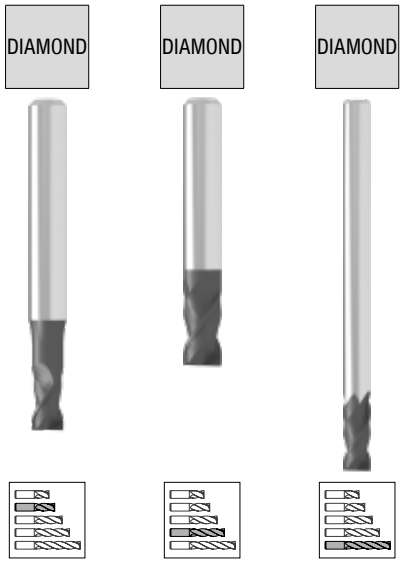

DIN 6527 | DIN 6527 | Factory standard

HA | HA | HA

V1 | V1 | V1

DC	Tol.	APMX	DN	LH	OAL	DCONMS h6	CHW	ZEFP	Article no. 52 760 ...		Article no. 52 761 ...		Article no. 52 762 ...	
mm		mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
2	e8	3			50	6	0,04	2	161,00	020				
2	h10	8	1,8	31	60	2	0,04	2					121,30	020
3	e8	4			50	6	0,07	2	161,00	030				
3	h10	12	2,8	41	70	3	0,07	2					130,00	030
4	e8	5			54	6	0,07	2	161,00	040				
4	h10	15	3,8	51	80	4	0,07	2					161,00	040
5	e8	6			54	6	0,12	2	161,00	050				
5	h10	20	4,8	71	100	5	0,12	2					189,60	050
6	e8	10			57	6	0,12	2			157,60	060		
6	h10	20	5,8	63	100	6	0,12	2					208,30	060
8	e8	16			63	8	0,12	2			220,50	080		
8	h10	20	7,8	83	120	8	0,12	2					293,20	080
10	e8	19			72	10	0,20	2			291,00	100		
10	h10	25	9,8	99	140	10	0,20	2					376,90	100
12	e8	22			83	12	0,20	2			361,50	120		
12	h10	25	11,8	104	150	12	0,20	2					493,80	120

Steel			
Stainless steel			
Cast iron			
Non ferrous metals	●	●	●
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 348

End milling cutter

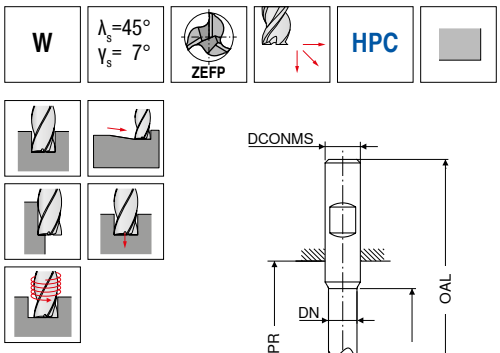



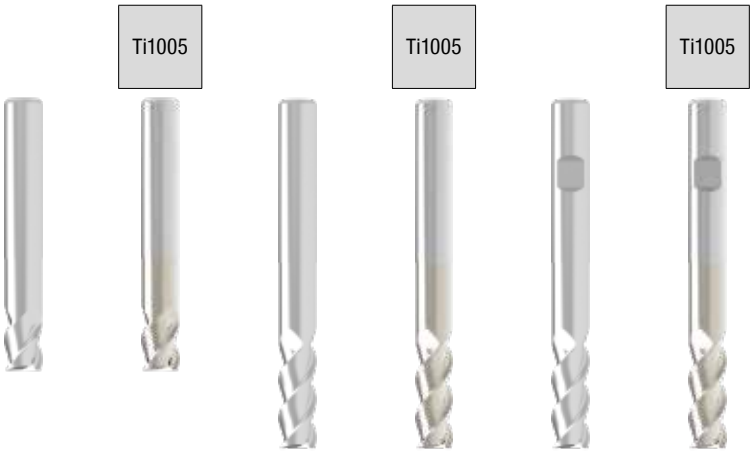

LPR with Shank DIN 6535 HB

								Factory standard		Factory standard		Factory standard		Factory standard		Factory standard	
								HA		HA		HA		HA		HB	
								V0		V0		V0		V0		V0	
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 54 610 ...		Article no. 54 612 ...		Article no. 54 610 ...		Article no. 54 612 ...		Article no. 54 611 ...		Article no. 54 613 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
3	3,5	2,8	12	19	55	6	3	25,13	033	36,04	033								
3	3,5	2,8	15	22	58	6	3					27,44	034	38,24	034				
3	8,0	2,8	15	22	58	6	3					27,44	032	38,24	032	27,44	032	38,24	032
4	4,5	3,8	12	19	55	6	3	25,13	043	36,04	043								
4	4,5	3,8	20	26	62	6	3					27,44	044	38,24	044				
4	10,5	3,8	20	26	62	6	3					29,10	042	40,23	042	29,10	042	40,23	042
5	5,5	4,8	15	22	58	6	3	25,13	053	36,04	053								
5	5,5	4,8	25	34	70	6	3					27,44	054	38,24	054				
5	13,0	4,8	25	34	70	6	3					29,10	052	40,23	052	29,10	052	40,23	052
6	7,0	5,8	18	22	58	6	3	25,13	063	36,04	063								
6	7,0	5,8	30	34	70	6	3					27,44	064	38,24	064				
6	16,0	5,8	30	34	70	6	3					29,10	062	40,23	062	29,10	062	40,23	062
7	21,0	6,7	40	44	80	8	3					41,43	072	54,89	072	41,43	072	54,89	072
8	9,0	7,7	24	28	64	8	3	36,04	083	48,50	083								
8	9,0	7,7	40	44	80	8	3					39,35	084	51,91	084				
8	21,0	7,7	40	44	80	8	3					41,43	082	54,89	082	41,43	082	54,89	082
9	26,0	8,7	50	54	94	10	3					65,24	092	80,67	092	65,24	092	80,67	092
10	11,0	9,7	30	34	74	10	3	55,99	103	69,76	103								
10	11,0	9,7	50	54	94	10	3					61,29	104	75,28	104				
10	26,0	9,7	50	54	94	10	3					65,24	102	80,67	102	65,24	102	80,67	102
11	31,0	10,6	60	64	109	12	3					108,40	112	127,80	112	108,40	112	127,80	112
12	13,0	11,6	36	40	85	12	3	73,62	123	87,40	123								
12	13,0	11,6	60	64	109	12	3					113,60	124	132,30	124				
12	31,0	11,6	60	64	109	12	3					108,40	122	127,80	122	108,40	122	127,80	122
13	36,0	12,6	70	74	119	14	3					157,60	132	179,60	132	157,60	132	179,60	132
14	15,0	13,6	42	46	91	14	3	106,50	143	122,30	143								
14	15,0	13,6	70	74	119	14	3					164,20	144	185,20	144				
14	36,0	13,6	70	74	119	14	3					157,60	142	179,60	142	157,60	142	179,60	142
15	17,0	14,5	48	52	100	16	3	137,80	153	155,50	153								
15	17,0	14,5	80	84	132	16	3					213,80	154	237,00	154				
15	41,0	14,5	80	84	132	16	3					203,80	152	229,30	152	203,80	152	229,30	152
16	17,0	15,5	48	52	100	16	3	137,80	163	155,50	163								
16	17,0	15,5	80	84	132	16	3					213,80	164	237,00	164				
16	41,0	15,5	80	84	132	16	3					203,80	162	229,30	162	203,80	162	229,30	162
18	20,0	17,5	54	58	106	18	3	174,10	183	192,80	183								
18	20,0	17,5	90	94	142	18	3					266,80	184	291,00	184				
18	47,0	17,5	90	94	142	18	3					257,90	182	283,30	182	257,90	182	283,30	182
20	22,0	19,5	60	64	114	20	3	257,90	203	283,30	203								
20	22,0	19,5	100	104	154	20	3					283,30	204	315,20	204				
20	52,0	19,5	100	104	154	20	3					275,60	202	305,30	202	275,60	202	305,30	202
25	27,0	24,5	75	80	136	25	3	470,60	253	492,70	253								
25	27,0	24,5	125	130	186	25	3					551,10	254	574,20	254				

Steel						
Stainless steel						
Cast iron						
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys						
hardened materials						

→ v_c/f_z Page 338+339

14

End milling cutter

W | λ_s=45° γ_s= 7° | ZEFP | HPC | Ti1005



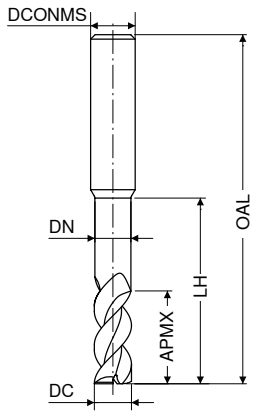

Factory standard | Factory standard

HA | HA

DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V0 Article no. 54 610 ...		V0 Article no. 54 612 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR	
3	3,5	2,8	24	67	6	3	33,96	035	44,86	035
4	4,5	3,8	32	74	6	3	33,96	045	44,86	045
5	5,5	4,8	40	88	6	3	33,96	055	44,86	055
6	7,0	5,8	48	88	6	3	33,96	065	44,86	065
8	9,0	7,7	64	104	8	3	49,48	085	61,71	085
10	11,0	9,7	80	124	10	3	112,40	105	131,30	105
12	13,0	11,6	96	145	12	3	149,90	125	165,40	125
14	15,0	13,6	112	161	14	3	218,30	145	238,10	145
16	17,0	15,5	128	180	16	3	282,20	165	306,40	165
18	20,0	17,5	144	196	18	3	358,30	185	380,30	185
20	22,0	19,5	160	214	20	3	392,40	205	422,10	205

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 338+339

End milling cutter with corner radius

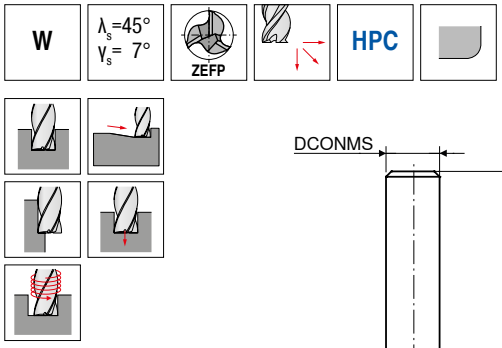

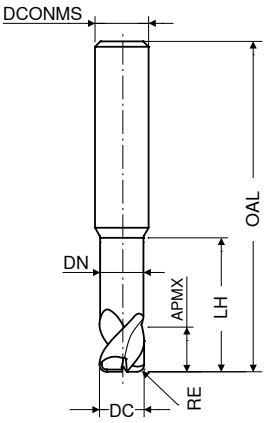

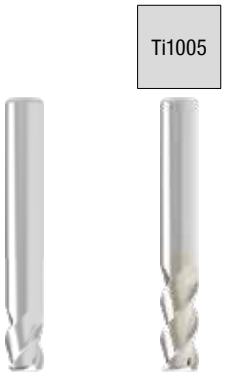

Factory standard

Factory standard

HA

HA

V0

V0

DC h6	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Article no. 54 620 ...		Article no. 54 622 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3	0,4	3,5	2,8	12	55	6	3	28,22	034	39,01	034
3	0,6	3,5	2,8	12	55	6	3	28,22	035	39,01	035
4	0,4	4,5	3,8	12	55	6	3	28,22	044	39,01	044
4	0,6	4,5	3,8	12	55	6	3	28,22	046	39,01	046
5	0,4	5,5	4,8	15	58	6	3	28,22	054	39,01	054
5	0,6	5,5	4,8	15	58	6	3	28,22	056	39,01	056
6	0,4	7,0	5,8	18	58	6	3	28,22	064	39,01	064
6	0,6	7,0	5,8	18	58	6	3	28,22	066	39,01	066
8	0,4	9,0	7,7	24	64	8	3	39,01	084	51,37	084
8	0,6	9,0	7,7	24	64	8	3	39,01	086	51,37	086
8	0,8	9,0	7,7	24	64	8	3	39,01	087	51,37	087
10	1,6	11,0	9,7	30	74	10	3	59,07	103	72,74	103
12	2,0	13,0	11,6	36	85	12	3	76,49	124	90,59	124
14	0,6	15,0	13,6	42	91	14	3	109,30	146	125,70	146
14	0,8	15,0	13,6	42	91	14	3	109,30	147	125,70	147
16	1,6	17,0	15,5	48	100	16	3	142,30	163	156,50	163
16	3,2	17,0	15,5	48	100	16	3	143,30	167	157,60	167
18	1,6	20,0	17,5	54	106	18	3	176,30	183	195,10	183
20	3,2	22,0	19,5	60	114	20	3	265,60	207	293,20	207
20	5,0	22,0	19,5	60	114	20	3	265,60	209	293,20	209

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 338+339

14

End milling cutter

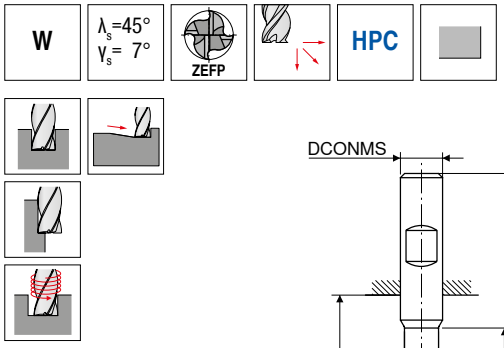

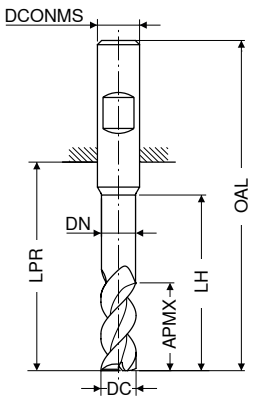

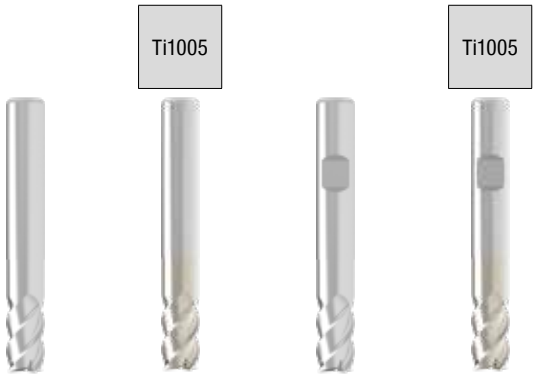

								Factory standard		Factory standard		Factory standard		Factory standard	
								HA		HA		HB		HB	
								V0		V0		V0		V0	
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 54 630 ...		Article no. 54 632 ...		Article no. 54 631 ...		Article no. 54 633 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
6	10	5,8	18	22	58	6	4	26,46	061	37,14	061	26,46	061	37,14	061
7	13	6,7	24	28	64	8	4	37,59	071	50,26	071	37,59	071	50,26	071
8	13	7,7	24	28	64	8	4	37,59	081	50,26	081	37,59	081	50,26	081
9	16	8,7	30	34	74	10	4	58,52	091	72,42	091	58,52	091	72,42	091
10	16	9,7	30	34	74	10	4	58,52	101	72,42	101	58,52	101	72,42	101
11	19	10,6	36	40	85	12	4	76,49	111	91,04	111	76,49	111	91,04	111
12	19	11,6	36	40	85	12	4	76,49	121	91,04	121	76,49	121	91,04	121
13	22	12,6	42	46	91	14	4	110,00	131	126,80	131	110,00	131	126,80	131
14	22	13,6	42	46	91	14	4	110,00	141	126,80	141	110,00	141	126,80	141
15	25	14,5	48	52	100	16	4	143,30	151	158,70	151	143,30	151	158,70	151
16	25	15,5	48	52	100	16	4	143,30	161	158,70	161	143,30	161	158,70	161
18	29	17,5	54	58	106	18	4	179,60	181	198,30	181	179,60	181	198,30	181
20	32	19,5	60	64	114	20	4	203,80	201	229,30	201	203,80	201	229,30	201
Steel															
Stainless steel															
Cast iron															
Non ferrous metals								●		●		●		●	
Heat resistant alloys															
hardened materials															

→ v_c/f_z Page 338+339

End milling cutter

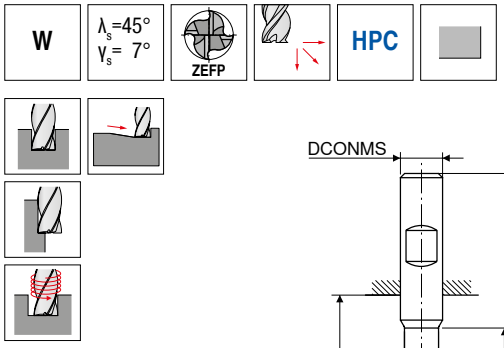

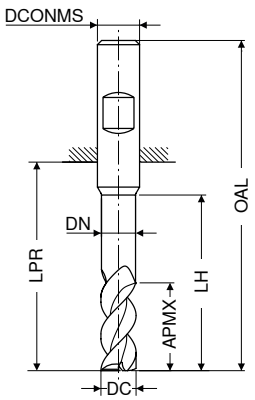

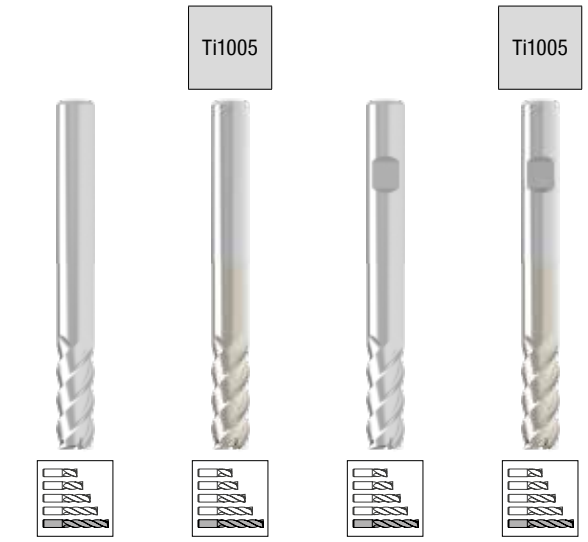

								Factory standard		Factory standard		Factory standard		Factory standard	
								HA		HA		HB		HB	
								V0		V0		V0		V0	
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 54 630 ...		Article no. 54 632 ...		Article no. 54 631 ...		Article no. 54 633 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
6	16	5,8	30	34	70	6	4	28,00	062	40,11	062	28,00	062	40,11	062
7	21	6,7	40	44	80	8	4	41,43	072	54,89	072	41,43	072	54,89	072
8	21	7,7	40	44	80	8	4	41,43	082	54,89	082	41,43	082	54,89	082
9	26	8,7	50	54	94	10	4	65,24	092	80,67	092	65,24	092	80,67	092
10	26	9,7	50	54	94	10	4	65,24	102	80,67	102	65,24	102	80,67	102
11	31	10,6	60	64	109	12	4	108,40	112	127,80	112	108,40	112	127,80	112
12	31	11,6	60	64	109	12	4	108,40	122	127,80	122	108,40	122	127,80	122
13	36	12,6	70	74	119	14	4	157,60	132	179,60	132	157,60	132	179,60	132
14	36	13,6	70	74	119	14	4	157,60	142	179,60	142	157,60	142	179,60	142
15	41	14,5	80	84	132	16	4	203,80	152	229,30	152	203,80	152	229,30	152
16	41	15,5	80	84	132	16	4	203,80	162	229,30	162	203,80	162	229,30	162
18	47	17,5	90	94	142	18	4	257,90	182	283,30	182	257,90	182	283,30	182
20	52	19,5	100	104	154	20	4	275,60	202	305,30	202	275,60	202	305,30	202

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 338+339

End milling cutter

W | λ_s=38° γ_s=17° | ZEFP | HPC

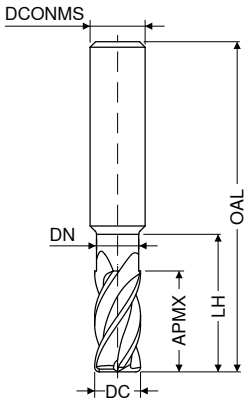

Ti1005

Factory standard | Factory standard

HA | HA

DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V0 Article no. 54 650 ...		V0 Article no. 54 652 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR	
6	19	5,8	30	70	6	5	64,15	062	76,49	062
8	25	7,7	40	80	8	5	82,54	082	94,79	082
10	31	9,7	50	94	10	5	127,80	102	142,30	102
12	37	11,6	60	109	12	5	203,80	122	219,30	122
14	43	13,6	70	119	14	5	331,80	142	347,20	142
16	49	15,5	80	132	16	7	369,30	162	385,80	162
18	56	17,5	90	142	18	7	460,60	182	478,40	182
20	62	19,5	100	154	20	7	511,40	202	531,30	202

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 338+339

End milling cutter



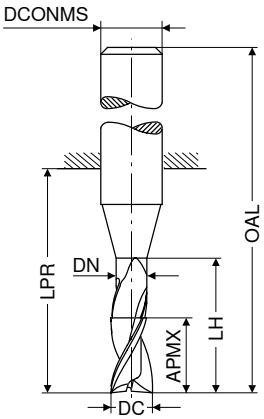

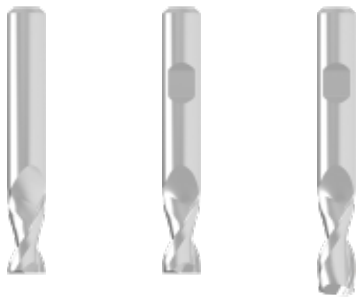

Factory standard

HA

Factory standard

HB

Factory standard

HB

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1 Article no. 52 842 ...		V1 Article no. 52 841 ...		V1 Article no. 52 848 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
0,20	0,4			10	38	3	2	51,69	920				
0,25	0,5			10	38	3	2	45,85	925				
0,30	1,0			10	38	3	2	29,65	930				
0,35	1,0			10	38	3	2	29,65	935				
0,40	1,0			10	38	3	2	23,91	940				
0,50	1,5			10	38	3	2	21,49	950				
0,60	1,5			10	38	3	2	21,49	960				
0,70	2,0			10	38	3	2	21,49	970				
0,80	2,0			10	38	3	2	21,49	980				
0,90	2,5			10	38	3	2	21,49	990				
1,00	3,0			10	38	3	2	21,49	010				
1,00	4,0	0,90	6	22	58	6	2					31,52	010
1,10	3,0			10	38	3	2	21,49	011				
1,20	4,0			10	38	3	2	21,49	012				
1,30	4,0			10	38	3	2	22,60	013				
1,40	4,0			10	38	3	2	22,60	014				
1,50	3,0	1,40	6	18	54	6	2	29,65	015	29,65	015		
1,50	4,0			10	38	3	2	22,60	915				
1,50	6,0	1,40	8	22	58	6	2					31,52	015
1,60	4,0			10	38	3	2	24,02	016				
1,80	5,0			10	38	3	2	24,02	018				
2,00	4,0	1,90	8	18	54	6	2	28,43	020	28,43	020		
2,00	7,0	1,90	10	22	58	6	2					31,52	020
2,50	4,0	2,40	8	18	54	6	2			28,43	025		
2,50	6,0			10	38	3	2	22,60	025				
2,80	4,0	2,70	9	18	54	6	2	32,73	028	32,73	028		
2,80	7,0	2,70	12	22	58	6	2					33,96	028
3,00	6,0	2,90	9	18	54	6	2	28,43	030	28,43	030		
3,00	10,0	2,90	14	22	58	6	2					31,52	030
3,50	6,0	3,30	9	18	54	6	2			28,43	035		
3,80	7,0	3,60	12	18	54	6	2	32,73	038	32,73	038		
3,80	10,0	3,60	18	22	58	6	2					33,96	038
4,00	7,0	3,80	12	18	54	6	2	28,22	040	28,22	040		
4,00	13,0	3,80	18	22	58	6	2					31,52	040
4,50	7,0	4,30	12	18	54	6	2			28,43	045		
4,80	8,0	4,60	16	18	54	6	2	32,73	048	32,73	048		
4,80	13,0	4,60	18	22	58	6	2					33,96	048
5,00	8,0	4,80	16	18	54	6	2	28,22	050	28,22	050		
5,00	15,0	4,80	18	22	58	6	2					31,52	050

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals	○	○	○
Heat resistant alloys	○	○	○
hardened materials			

→ v_c/f_z Page 350–353

14

Continued on next page

End milling cutter



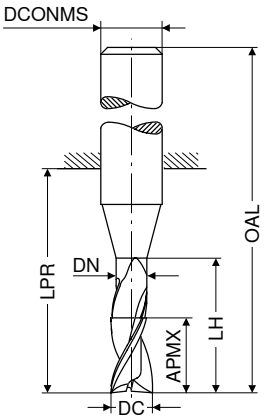

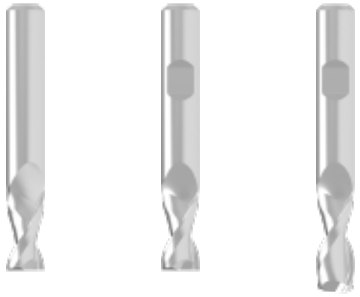

Factory standard

HA

Factory standard

HB

Factory standard

HB

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1 Article no. 52 842 ...		V1 Article no. 52 841 ...		V1 Article no. 52 848 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
5,50	8,0	5,30	16	18	54	6	2			28,43	055		
5,75	10,0	5,55	16	18	54	6	2	32,73	057	32,73	057		
5,75	15,0	5,55	18	22	58	6	2					34,83	057
6,00	10,0	5,80	16	18	54	6	2	28,22	060	28,22	060		
6,00	16,0	5,80	20	22	58	6	2					31,52	060
6,75	10,0	6,45	16	23	59	8	2	37,80	067	37,80	067		
6,75	16,0	6,45	23	34	70	8	2					42,33	067
7,00	12,0	6,70	18	23	59	8	2			36,59	070		
7,00	16,0	6,70	23	34	70	8	2					37,14	070
7,75	12,0	7,45	18	23	59	8	2	36,48	077	36,48	077		
7,75	16,0	7,45	23	34	70	8	2					39,68	077
8,00	12,0	7,70	20	23	59	8	2	31,52	080	31,52	080		
8,00	22,0	7,70	25	34	70	8	2					36,38	080
8,70	12,0	8,40	20	27	67	10	2			60,62	087		
8,70	12,0	8,40	22	27	67	10	2	60,62	087				
9,00	13,0	8,70	22	27	67	10	2			59,40	090		
9,00	22,0	8,70	28	33	73	10	2					66,02	090
9,70	13,0	9,40	22	27	67	10	2	58,64	097	58,64	097		
9,70	22,0	9,40	28	33	73	10	2					67,44	097
10,00	13,0	9,70	24	27	67	10	2	49,71	100	49,71	100		
10,00	25,0	9,70	30	33	73	10	2					63,71	100
11,00	25,0	10,60	32	39	84	12	2					89,82	110
11,70	16,0	11,30	24	28	73	12	2	84,31	117	84,31	117		
11,70	25,0	11,30	32	39	84	12	2					90,82	117
12,00	16,0	11,60	26	28	73	12	2	69,33	120	69,33	120		
12,00	26,0	11,60	35	39	84	12	2					85,52	120
13,70	16,0	13,30	26	30	75	14	2	113,60	137	113,60	137		
13,70	26,0	13,30	35	39	84	14	2					120,10	137
14,00	16,0	13,60	28	30	75	14	2	95,77	140	95,77	140		
14,00	26,0	13,60	35	39	84	14	2					111,30	140
15,70	20,0	15,20	30	35	83	16	2	130,00	157	130,00	157		
16,00	20,0	15,50	32	35	83	16	2	104,20	160	104,20	160		
16,00	30,0	15,50	40	45	93	16	2					133,30	160
17,70	20,0	17,20	32	37	85	18	2	172,00	177	172,00	177		
18,00	20,0	17,50	34	37	85	18	2	137,80	180	137,80	180		
18,00	30,0	17,50	40	45	93	18	2					166,50	180
19,70	25,0	19,20	38	43	93	20	2	207,30	197	207,30	197		
20,00	25,0	19,50	40	43	93	20	2	176,30	200	176,30	200		
20,00	40,0	19,50	50	54	104	20	2					217,10	200

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals	○	○	○
Heat resistant alloys	○	○	○
hardened materials			

→ v_c/f_z Page 350–353

End milling cutter

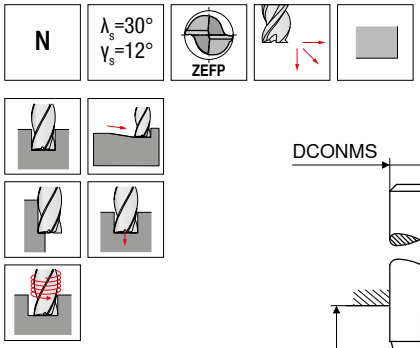

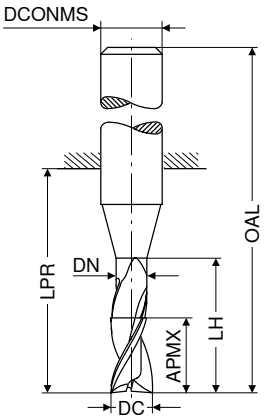

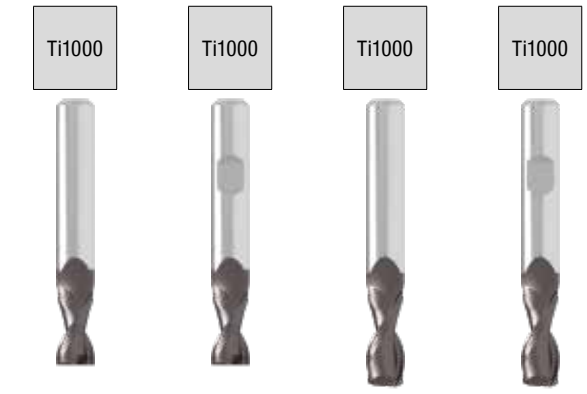

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 843 ... EUR		Article no. 52 844 ... EUR		Article no. 52 847 ... EUR		Article no. 52 849 ... EUR	
0,20	0,4			10	38	3	2	57,76	920						
0,25	0,5			10	38	3	2	57,76	925						
0,30	1,0			10	38	3	2	39,24	930						
0,35	1,0			10	38	3	2	39,24	935						
0,40	1,0			10	38	3	2	32,62	940						
0,50	1,5			10	38	3	2	29,98	950						
0,60	1,5			10	38	3	2	29,98	960						
0,70	2,0			10	38	3	2	29,98	970						
0,80	2,0			10	38	3	2	29,98	980						
0,90	2,5			10	38	3	2	29,98	990						
1,00	3,0			10	38	3	2	29,98	010						
1,00	4,0	0,90	6	22	58	6	2					44,09	010	44,09	010
1,10	3,0			10	38	3	2	29,98	011						
1,20	4,0			10	38	3	2	29,98	012						
1,30	4,0			10	38	3	2	29,98	013						
1,40	4,0			10	38	3	2	31,09	014						
1,50	3,0	1,40	6	18	54	6	2	36,15	015	36,15	015				
1,50	4,0			10	38	3	2	31,09	915						
1,50	6,0	1,40	8	22	58	6	2					44,09	015	44,09	015
1,60	4,0			10	38	3	2	32,73	016						
1,80	5,0			10	38	3	2	32,73	018						
2,00	4,0	1,90	8	18	54	6	2	40,01	020	40,01	020				
2,00	5,0			10	38	3	2	32,73	021						
2,00	7,0	1,90	10	22	58	6	2					44,09	020	44,09	020
2,50	4,0	2,40	8	18	54	6	2	40,01	025	40,01	025				
2,50	6,0			10	38	3	2	34,61	026						
2,80	4,0	2,70	9	18	54	6	2	45,30	028	45,30	028				
2,80	7,0	2,70	12	22	58	6	2					45,96	028	45,96	028
3,00	6,0	2,90	9	18	54	6	2	40,01	030	40,01	030				
3,00	6,0			10	38	3	2	34,61	031						
3,00	10,0	2,90	14	22	58	6	2					44,09	030	44,09	030
3,50	6,0	3,30	9	18	54	6	2	43,09	035	43,09	035				
3,80	7,0	3,60	12	18	54	6	2	45,30	038	45,30	038				
3,80	10,0	3,60	18	22	58	6	2					45,96	038	45,96	038
4,00	7,0	3,80	12	18	54	6	2	40,01	040	40,01	040				
4,00	13,0	3,80	18	22	58	6	2					44,09	040	44,09	040
4,50	7,0	4,30	12	18	54	6	2	43,09	045	43,09	045				
4,80	8,0	4,60	16	18	54	6	2	45,30	048	45,30	048				
4,80	13,0	4,60	18	22	58	6	2					45,96	048	45,96	048
5,00	8,0	4,80	16	18	54	6	2	40,01	050	40,01	050				
5,00	15,0	4,80	18	22	58	6	2					44,09	050	44,09	050
5,50	8,0	5,30	16	18	54	6	2	43,09	055	43,09	055				

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–353

Continued on next page

End milling cutter

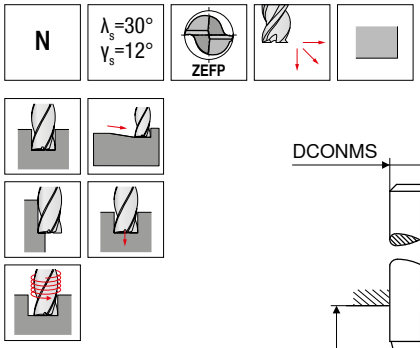

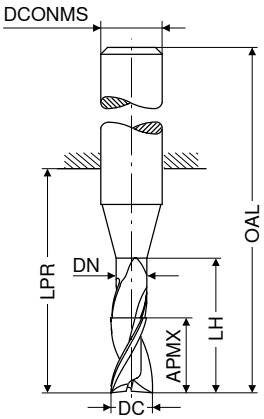

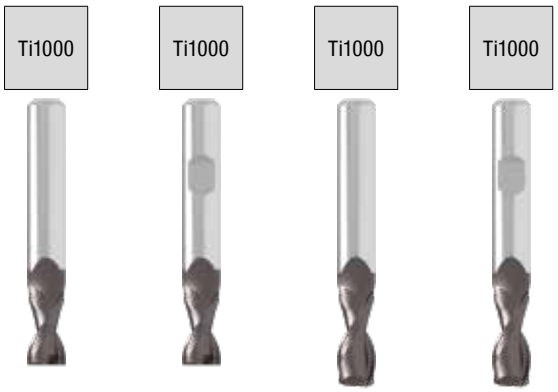

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 843 ...		Article no. 52 844 ...		Article no. 52 847 ...		Article no. 52 849 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
5,75	10,0	5,55	16	18	54	6	2	45,30	057	45,30	057				
5,75	15,0	5,55	18	22	58	6	2					46,96	057	46,96	057
6,00	10,0	5,80	16	18	54	6	2	40,01	060	40,01	060				
6,00	16,0	5,80	20	22	58	6	2					44,09	060	44,09	060
6,75	16,0	6,45	23	34	70	8	2					59,96	067	59,96	067
6,75	10,0	6,45	16	23	59	8	2			54,44	067				
7,00	12,0	6,70	18	23	59	8	2	56,43	070	56,43	070				
7,00	16,0	6,70	23	34	70	8	2					54,11	070	54,11	070
7,75	16,0	7,45	23	34	70	8	2					56,76	077	56,76	077
7,75	12,0	7,45	18	23	59	8	2	52,46	077	52,46	077				
8,00	12,0	7,70	20	23	59	8	2	48,28	080	48,28	080				
8,00	22,0	7,70	25	34	70	8	2					53,24	080	53,24	080
8,70	12,0	8,40	20	27	67	10	2			84,09	087				
9,00	13,0	8,70	22	27	67	10	2	80,12	090	80,12	090				
9,00	22,0	8,70	28	33	73	10	2					91,15	090	91,15	090
9,70	13,0	9,40	22	27	67	10	2	82,12	097	82,12	097				
9,70	22,0	9,40	28	33	73	10	2					92,91	097	92,91	097
10,00	13,0	9,70	24	27	67	10	2	71,20	100	71,20	100				
10,00	25,0	9,70	30	33	73	10	2					89,82	100	89,82	100
11,00	25,0	10,60	32	39	84	12	2					123,50	110	123,50	110
11,70	16,0	11,30	24	28	73	12	2	117,90	117	117,90	117				
11,70	25,0	11,30	32	39	84	12	2					125,70	117	125,70	117
12,00	26,0	11,60	35	39	84	12	2					121,30	120	121,30	120
12,00	16,0	11,60	26	28	73	12	2	98,86	120	98,86	120				
13,70	16,0	13,30	26	30	75	14	2			155,50	137				
13,70	26,0	13,30	35	39	84	14	2					159,90	137	159,90	137
14,00	26,0	13,60	35	39	84	14	2					155,50	140	155,50	140
14,00	16,0	13,60	28	30	75	14	2	132,30	140	132,30	140				
15,70	20,0	15,20	30	35	83	16	2			179,60	157				
16,00	20,0	15,50	32	35	83	16	2	149,90	160	149,90	160				
16,00	30,0	15,50	40	45	93	16	2					196,30	160	196,30	160
17,70	20,0	17,20	32	37	85	18	2			232,50	177				
18,00	20,0	17,50	34	37	85	18	2	191,80	180	191,80	180				
18,00	30,0	17,50	40	45	93	18	2					231,50	180	231,50	180
19,70	25,0	19,20	38	43	93	20	2			280,00	197				
20,00	25,0	19,50	40	43	93	20	2	240,20	200	240,20	200				
20,00	40,0	19,50	50	54	104	20	2					296,50	200	296,50	200

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–353

End milling cutter

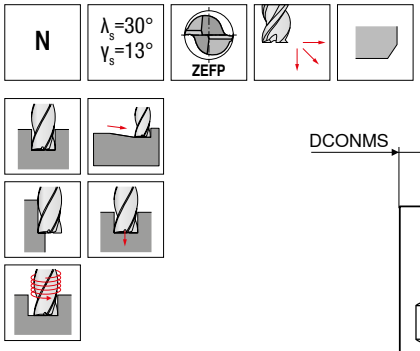

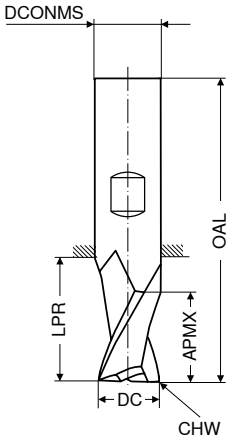

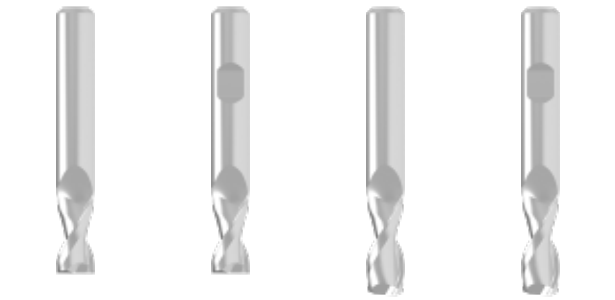

Factory standard	Factory standard	≈DIN 6527	≈DIN 6527
HA	HB	HA	HB
V0	V0	V0	V0

DC e8	APMX	LPR	OAL	DCONMS h5	CHW	ZEFP	Article no. 50 593 ...		Article no. 50 593 ...		Article no. 50 594 ...		Article no. 50 594 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
0,25	0,5	10	38	3,0		2					29,10	**925**		
0,30	1,0	10	38	3,0		2					29,10	**930**		
0,35	1,0	10	38	3,0		2					29,10	**935**		
0,40	1,0	10	38	3,0		2					29,10	**940**		
0,50	1,5	10	38	3,0		2					29,10	**950**		
0,60	1,5	10	38	3,0		2					29,10	**960**		
0,70	2,0	10	38	3,0		2					29,10	**970**		
0,80	2,0	10	38	3,0		2					29,10	**980**		
0,90	2,5	10	38	3,0		2					29,10	**990**		
1,00	3,0	22	50	3,0		2					29,98	**010**		
1,10	3,0	22	50	3,0		2					29,98	**011**		
1,20	4,0	22	50	3,0		2					29,98	**012**		
1,40	4,0	22	50	3,0		2					29,98	**014**		
1,50	4,0	22	50	3,0		2					29,98	**015**		
1,60	4,0	22	50	3,0		2					29,98	**016**		
1,80	5,0	22	50	3,0		2					29,98	**018**		
2,00	5,0	22	50	3,0	0,07	2					29,98	**020**		
2,00	8,0	8	32	2,0	0,07	2	14,10	**020**						
2,50	6,0	22	50	3,0	0,07	2					29,98	**025**		
2,50	8,0	8	32	2,5	0,07	2	14,10	**025**						
2,80	8,0	21	57	6,0	0,07	2							24,58	**028**
3,00	8,0	21	57	6,0	0,15	2							24,58	**030**
3,00	12,0	12	32	3,0	0,15	2	14,10	**030**						
3,50	12,0	12	32	3,5	0,15	2	14,10	**035**						
3,80	11,0	21	57	6,0	0,15	2							24,58	**038**
4,00	11,0	21	57	6,0	0,15	2							24,58	**040**
4,00	12,0	12	40	4,0	0,15	2	14,44	**040**						
4,50	14,0	22	50	4,5	0,15	2	17,86	**045**						
4,80	13,0	21	57	6,0	0,15	2							24,58	**048**
5,00	13,0	21	57	6,0	0,15	2							24,58	**050**
5,00	14,0	22	50	5,0	0,15	2	17,86	**050**						
5,50	16,0	22	50	5,5	0,15	2	20,28	**055**						
5,80	13,0	21	57	6,0	0,15	2							24,58	**058**
6,00	13,0	21	57	6,0	0,15	2							24,58	**060**
6,00	16,0	14	50	6,0	0,15	2			20,28	**060**				
6,50	16,0	16	50	6,5	0,15	2	27,33	**065**						
6,80	16,0	27	63	8,0	0,15	2							28,77	**068**
7,00	16,0	27	63	8,0	0,15	2							28,77	**070**
7,00	20,0	24	60	7,0	0,15	2	27,33	**070**						
7,50	20,0	24	60	7,5	0,15	2	27,66	**075**						
7,80	19,0	27	63	8,0	0,15	2							28,77	**078**

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials				

→ v_c/f_z Page 350–353

Continued on next page

End milling cutter



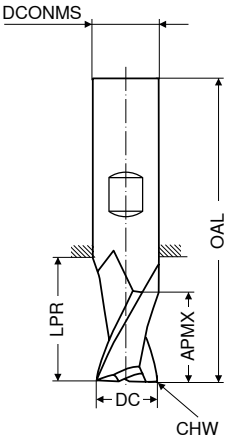

	Factory standard	Factory standard	≈DIN 6527	≈DIN 6527
	HA	HB	HA	HB
	V0	V0	V0	V0
DC e8 / mm	Article no. 50 593 ... EUR	Article no. 50 593 ... EUR	Article no. 50 594 ... EUR	Article no. 50 594 ... EUR
8,00		27,66 080		
8,00				28,77 080
8,50	36,81 085			
8,70				44,64 087
9,00				44,64 090
9,00	36,81 090			
9,50	43,98 095			
9,70				44,64 097
10,00		43,98 100		
10,00				44,64 100
10,70				69,11 107
11,00	57,87 110			
11,00				69,11 110
11,70				69,11 117
12,00		57,87 120		
12,00				65,92 120
13,00	83,32 130			
13,70				84,43 137
14,00		78,47 140		
14,00				84,43 140
15,00	110,00 150			
15,70				112,40 157
16,00		103,50 160		
16,00				100,70 160
17,70				184,10 177
18,00		145,50 180		
18,00				131,30 180
19,70				245,80 197
20,00		147,80 200		
20,00				166,50 200

DC e8 / mm	APMX / mm	LPR / mm	OAL / mm	DCONMS h5 / mm	CHW / mm	ZEFP
8,00	18,0	24	60	8,0	0,15	2
8,00	19,0	27	63	8,0	0,15	2
8,50	20,0	24	60	8,5	0,15	2
8,70	19,0	32	72	10,0	0,15	2
9,00	19,0	32	72	10,0	0,15	2
9,00	20,0	24	60	9,0	0,15	2
9,50	22,0	34	70	9,5	0,15	2
9,70	22,0	32	72	10,0	0,15	2
10,00	20,0	30	70	10,0	0,15	2
10,00	22,0	32	72	10,0	0,15	2
10,70	26,0	38	83	12,0	0,15	2
11,00	22,0	30	70	11,0	0,15	2
11,00	26,0	38	83	12,0	0,15	2
11,70	26,0	38	83	12,0	0,15	2
12,00	20,0	25	70	12,0	0,15	2
12,00	26,0	38	83	12,0	0,15	2
13,00	25,0	30	75	13,0	0,15	2
13,70	26,0	38	83	14,0	0,15	2
14,00	22,0	30	75	14,0	0,15	2
14,00	26,0	38	83	14,0	0,15	2
15,00	25,0	30	75	15,0	0,15	2
15,70	32,0	44	92	16,0	0,15	2
16,00	22,0	27	75	16,0	0,15	2
16,00	32,0	44	92	16,0	0,15	2
17,70	32,0	44	92	18,0	0,15	2
18,00	30,0	52	100	18,0	0,15	2
18,00	32,0	44	92	18,0	0,15	2
19,70	38,0	54	104	20,0	0,15	2
20,00	30,0	50	100	20,0	0,15	2
20,00	38,0	54	104	20,0	0,15	2

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials				

→ v_c/f_z Page 350–353

End milling cutter

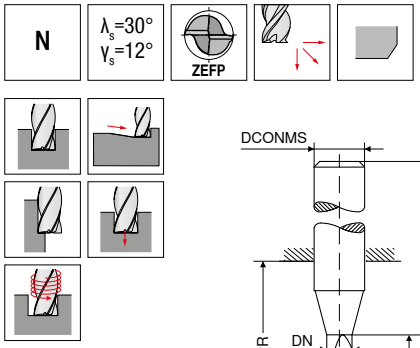

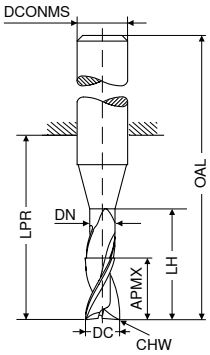

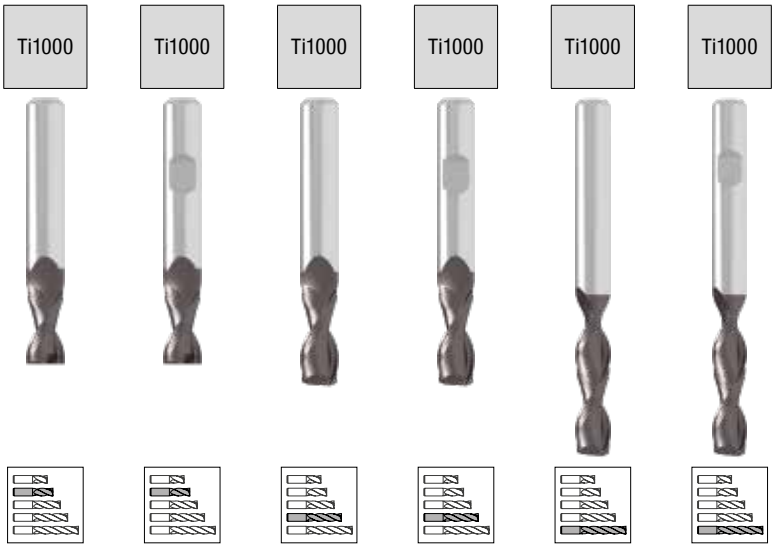

									Factory standard		Factory standard		Factory standard		Factory standard		Factory standard	
									HA		HB		HA		HB		HA	HB
									V1		V1		V1		V1		V1	V1
DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 52 839 ...		Article no. 52 840 ...		Article no. 52 845 ...		Article no. 52 846 ...		Article no. 52 850 ...	Article no. 52 851 ...
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR	EUR
2,00	4	1,90	8	18	54	6	0,04	2	35,05	020	35,05	020						
2,00	5			10	38	3	0,04	2	30,31	021								
2,00	6			22	38	2	0,04	2					44,09	020				
2,00	7	1,90	10	22	58	6	0,04	2							38,36	020		
2,50	4	2,40	8	18	54	6	0,07	2	35,05	025	35,05	025						
2,50	6			10	38	3	0,07	2	35,05	026								
2,80	4	2,70	9	18	54	6	0,07	2	39,79	028	39,79	028						
2,80	7			22	38	3	0,07	2					48,61	028				
2,80	7	2,70	12	22	58	6	0,07	2							40,01	028		
3,00	6	2,90	9	18	54	6	0,07	2	35,05	030	35,05	030						
3,00	6			10	38	3	0,07	2	35,05	031								
3,00	7			22	38	3	0,07	2					44,09	030				
3,00	10	2,90	14	22	58	6	0,07	2							38,36	030		
3,00	20	2,90	24	32	60	3	0,07	2									55,21	030
3,50	6	3,30	9	18	54	6	0,07	2	37,80	035	37,80	035						
3,80	7	3,60	12	18	54	6	0,07	2	39,79	038	39,79	038						
3,80	8	3,60	20	22	50	4	0,07	2					48,61	038				
3,80	10	3,60	18	22	58	6	0,07	2							40,01	038		
4,00	7	3,80	12	18	54	6	0,07	2	35,05	040	35,05	040						
4,00	8	3,80	20	22	50	4	0,07	2					44,09	040				
4,00	13	3,80	18	22	58	6	0,07	2							38,36	040		
4,00	30	3,80	35	47	75	4	0,07	2									60,84	040
4,50	7	4,30	12	18	54	6	0,12	2	37,80	045	37,80	045						
4,80	8	4,60	16	18	54	6	0,12	2	39,79	048	39,79	048						
4,80	10	4,60	20	22	50	5	0,12	2					48,61	048				
4,80	13	4,60	18	22	58	6	0,12	2							40,01	048		
5,00	8	4,80	16	18	54	6	0,12	2	35,05	050	35,05	050						
5,00	10	4,80	20	22	50	5	0,12	2					44,09	050				
5,00	15	4,80	18	22	58	6	0,12	2							38,36	050		
5,00	30	4,80	35	47	75	5	0,12	2									65,14	050
5,50	8	5,30	16	18	54	6	0,12	2	37,80	055	37,80	055						
5,75	10	5,55	16	18	54	6	0,12	2	44,19	057	44,19	057						
5,75	15	5,55	18	22	58	6	0,12	2					49,60	057	49,60	057		
6,00	10	5,80	16	18	54	6	0,12	2	35,05	060	35,05	060						
6,00	16	5,80	20	22	58	6	0,12	2					44,09	060	44,09	060		
6,00	40	5,80	60	64	100	6	0,12	2									75,39	060 75,39 060
6,75	16	6,45	23	34	70	8	0,12	2					70,54	067	70,54	067		
7,00	12	6,70	18	23	59	8	0,12	2	49,71	070	49,71	070						
7,00	16	6,70	23	34	70	8	0,12	2					63,48	070	63,48	070		

Steel	●	●	●	●	●	●
Stainless steel	○	○	○	○	○	○
Cast iron	●	●	●	●	●	●
Non ferrous metals	○	○	○	○	○	○
Heat resistant alloys	○	○	○	○	○	○
hardened materials	○	○	○	○	○	○

→ v_c/f_z Page 350–355

Continued on next page

End milling cutter

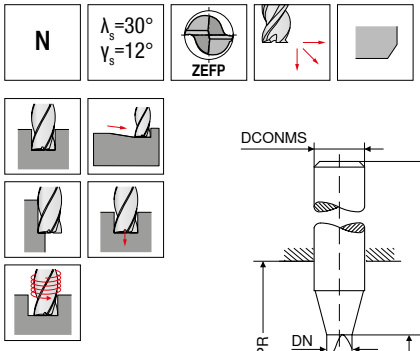

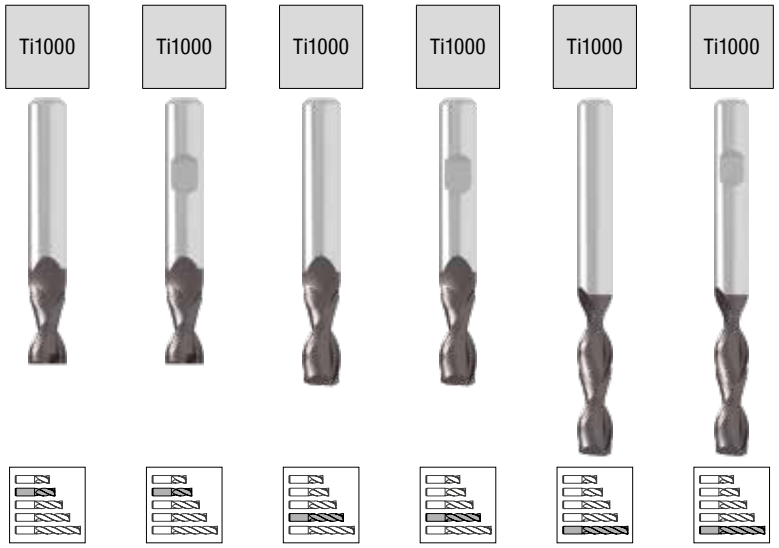

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Factory standard HA V1 Article no. 52 839 ...		Factory standard HB V1 Article no. 52 840 ...		Factory standard HA V1 Article no. 52 845 ...		Factory standard HB V1 Article no. 52 846 ...		Factory standard HA V1 Article no. 52 850 ...		Factory standard HB V1 Article no. 52 851 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
7,75	12	7,45	18	23	59	8	0,12	2	49,82	077	49,82	077								
7,75	16	7,45	23	34	70	8	0,12	2					60,94	077	60,94	077				
8,00	12	7,70	20	23	59	8	0,12	2	43,09	080	43,09	080								
8,00	22	7,70	25	34	70	8	0,12	2					53,24	080	53,24	080				
8,00	40	7,70	60	64	100	8	0,12	2									87,17	080	87,17	080
9,00	13	8,70	22	27	67	10	0,20	2	70,54	090	70,54	090								
9,00	22	8,70	28	33	73	10	0,20	2					101,40	090	101,40	090				
9,70	13	9,40	22	27	67	10	0,20	2	77,04	097	77,04	097								
9,70	22	9,40	28	33	73	10	0,20	2					103,60	097	103,60	097				
10,00	13	9,70	24	27	67	10	0,20	2	66,24	100	66,24	100								
10,00	25	9,70	30	33	73	10	0,20	2					89,82	100	89,82	100				
10,00	40	9,70	55	60	100	10	0,20	2									121,30	100	121,30	100
11,00	25	10,60	32	39	84	12	0,20	2					137,80	110	137,80	110				
11,70	16	11,30	24	28	73	12	0,20	2	108,30	117	108,30	117								
11,70	25	11,30	32	39	84	12	0,20	2					140,00	117	140,00	117				
12,00	16	11,60	26	28	73	12	0,20	2	91,37	120	91,37	120								
12,00	26	11,60	35	39	84	12	0,20	2					121,30	120	121,30	120				
12,00	45	11,60	50	55	100	12	0,20	2									161,00	120	161,00	120
13,70	26	13,30	35	39	84	14	0,20	2					177,50	137	177,50	137				
14,00	16	13,60	28	30	75	14	0,20	2	123,50	140	123,50	140								
14,00	26	13,60	35	39	84	14	0,20	2					155,50	140	155,50	140				
16,00	20	15,50	32	35	83	16	0,20	2	131,30	160	131,30	160								
16,00	30	15,50	40	45	93	16	0,20	2					196,30	160	196,30	160				
16,00	65	15,50	90	102	150	16	0,20	2									370,30	160	370,30	160
18,00	20	17,50	34	37	85	18	0,20	2	175,20	180	175,20	180								
18,00	30	17,50	40	45	93	18	0,20	2					231,50	180	231,50	180				
20,00	25	19,50	40	43	93	20	0,30	2	221,50	200	221,50	200								
20,00	40	19,50	50	54	104	20	0,30	2					296,50	200	296,50	200				
20,00	65	19,50	90	100	150	20	0,30	2									457,40	200	457,40	200

Steel	●	●	●	●	●	●
Stainless steel	○	○	○	○	○	○
Cast iron	●	●	●	●	●	●
Non ferrous metals	○	○	○	○	○	○
Heat resistant alloys	○	○	○	○	○	○
hardened materials	○	○	○	○	○	○

→ v_c/f_z Page 350–355

End milling cutter



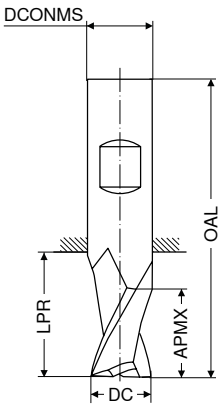

DC e8	APMX	LPR	OAL	DCONMS h5	ZEFP	≈DIN 6527 HB V0 Article no. 50 614 ...		≈DIN 6527 HB V0 Article no. 50 614 ...	
mm	mm	mm	mm	mm		EUR		EUR	
3,0	8	21	57	6	3	26,88	030		
3,5	11	21	57	6	3	29,10	035		
3,5	15	23	59	6	3			44,86	036
4,0	11	21	57	6	3	26,88	040		
4,0	19	27	63	6	3			44,97	041
4,5	13	21	57	6	3	29,10	045		
4,5	19	27	63	6	3			44,86	046
5,0	13	21	57	6	3	26,56	050		
5,0	24	32	68	6	3			48,93	051
5,5	13	21	57	6	3	29,10	055		
5,5	24	32	68	6	3			48,93	056
6,0	13	21	57	6	3	26,88	060		
6,0	24	32	68	6	3			47,39	061
6,5	16	27	63	8	3	35,05	065		
6,5	30	44	80	8	3			67,44	066
7,0	16	27	63	8	3	33,73	070		
7,0	30	44	80	8	3			67,44	071
7,5	19	27	63	8	3	32,07	075		
7,5	30	44	80	8	3			67,44	076
8,0	19	27	63	8	3	30,97	080		
8,0	38	52	88	8	3			61,84	081
8,5	19	32	72	10	3	48,38	085		
8,5	38	48	88	10	3			106,50	086
9,0	19	32	72	10	3	48,38	090		
9,0	38	48	88	10	3			106,50	091
9,5	22	32	72	10	3	55,44	095		
9,5	38	48	88	10	3			106,50	096
10,0	22	32	72	10	3	49,48	100		
10,0	45	55	95	10	3			103,60	101
11,0	26	38	83	12	3	78,47	110		
11,0	45	57	102	12	3			149,90	111
12,0	26	38	83	12	3	71,31	120		
12,0	53	65	110	12	3			149,90	121
14,0	26	38	83	14	3	91,70	140		
14,0	53	65	110	14	3			191,80	141
16,0	32	44	92	16	3	125,70	160		
16,0	63	75	123	16	3			260,10	161
18,0	32	44	92	18	3	152,10	180		
18,0	63	75	123	18	3			315,20	181
20,0	38	54	104	20	3	197,30	200		
20,0	75	91	141	20	3			419,90	201

Steel	○	○
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 350–355

14

End milling cutter

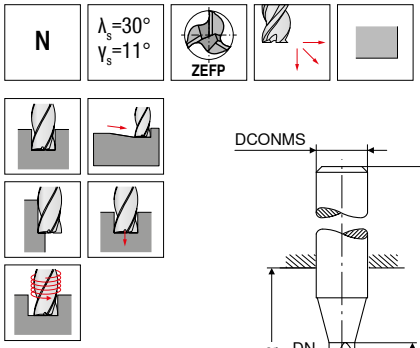

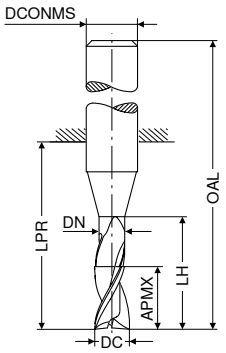

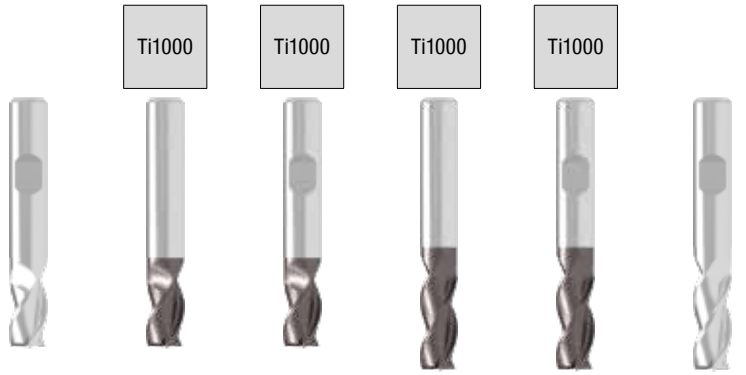



								Factory standard		Factory standard		Factory standard		Factory standard		Factory standard		Factory standard	
								HB		HA		HB		HA		HB		HB	
								V1		V1		V1		V1		V1		V1	
DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 823 ...		Article no. 52 821 ...		Article no. 52 822 ...		Article no. 52 826 ...		Article no. 52 827 ...		Article no. 52 828 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
1,00	4	1,00		22	58	6	3							43,98	010	43,98	010	31,52	010
1,50	3	1,40	6	18	54	6	3	27,66	015	39,90	015	39,90	015						
1,50	3	1,40	6	10	38	3	3			33,96	016								
1,50	6	1,50		22	58	6	3							43,98	015	43,98	015	31,52	015
2,00	4	1,90	8	18	54	6	3	28,22	020	39,90	020	39,90	020						
2,00	4	1,90	8	10	38	3	3			33,96	021								
2,00	7	2,00		22	58	6	3							43,98	020	43,98	020	31,52	020
2,50	4	2,40	8	18	54	6	3	28,22	025	39,24	025	39,24	025						
2,50	4	2,40	8	10	38	3	3			33,96	026								
2,80	6	2,70	9	18	54	6	3	33,06	028	42,66	028	42,66	028						
3,00	6	2,90	9	18	54	6	3	28,22	030	39,90	030	39,90	030						
3,00	6	2,90	9	10	38	3	3			33,96	031								
3,00	10	2,90	14	22	58	6	3							43,98	030	43,98	030	31,52	030
3,50	6	3,30	9	18	54	6	3	28,22	035	39,24	035	39,24	035						
3,80	6	3,60	12	18	54	6	3	33,06	038	42,66	038	42,66	038						
4,00	7	3,80	12	18	54	6	3	28,22	040	39,90	040	39,90	040						
4,00	13	3,80	17	22	58	6	3							43,98	040	43,98	040	31,52	040
4,50	7	4,30	12	18	54	6	3	28,22	045	39,24	045	39,24	045						
4,80	8	4,60	16	18	54	6	3	33,06	048	42,66	048	42,66	048						
5,00	8	4,80	16	18	54	6	3	28,22	050	39,90	050	39,90	050						
5,00	15	4,80	19	22	58	6	3							43,98	050	43,98	050	31,52	050
5,50	8	5,30	16	18	54	6	3	28,22	055	39,24	055	39,24	055						
5,75	8	5,55	16	18	54	6	3	33,18	057	47,16	057	47,16	057						
6,00	10	5,80	16	18	54	6	3	28,22	060	39,90	060	39,90	060						
6,00	16	5,80	20	22	58	6	3							43,98	060	43,98	060	31,52	060
7,00	19	6,70	23	28	64	8	3							56,53	070	56,53	070	40,34	070
7,75	10	7,45	18	22	58	8	3	37,03	077	53,24	077	53,24	077						
8,00	12	7,70	20	23	59	8	3	31,52	080	46,61	080	46,61	080						
8,00	22	7,70	26	34	70	8	3							53,89	080	53,89	080	36,15	080
9,00	23	8,70	28	32	72	10	3							97,22	090	97,22	090	69,54	090
9,70	12	9,40	18	19	59	10	3	58,64	097	81,99	097	81,99	097						
10,00	13	9,70	24	27	67	10	3	49,82	100	71,75	100	71,75	100						
10,00	25	9,70	31	33	73	10	3							90,04	100	90,04	100	64,03	100
11,00	25	10,60	34	38	83	12	3							130,00	110	130,00	110	93,90	110
11,70	16	11,30	20	22	67	12	3	81,44	117	115,80	117	115,80	117						
12,00	16	11,60	26	28	73	12	3	69,33	120	98,75	120	98,75	120						
12,00	26	11,60	37	39	84	12	3							121,30	120	121,30	120	85,42	120
14,00	16	13,60	28	30	75	14	3	95,77	140	132,30	140	132,30	140						
14,00	26	13,60	37	39	84	14	3							154,30	140	154,30	140	111,30	140
16,00	20	15,50	32	35	83	16	3	104,20	160	151,00	160	151,00	160						
16,00	32	15,50	43	45	93	16	3							194,00	160	194,00	160	134,50	160
18,00	20	17,50	34	37	85	18	3	137,80	180	191,80	180	191,80	180						
18,00	32	17,50	43	45	93	18	3							231,50	180	231,50	180	165,40	180
20,00	25	19,50	40	43	93	20	3	175,20	200	240,20	200	240,20	200						
20,00	40	19,50	52	54	104	20	3							297,50	200	297,50	200	216,00	200

Steel	●	●	●	●	●	●
Stainless steel	○	○	○	○	○	○
Cast iron	●	●	●	●	●	●
Non ferrous metals	○	○	○	○	○	○
Heat resistant alloys	○	○	○	○	○	○
hardened materials		○	○	○	○	

→ v_c/f_z Page 350–353

End milling cutter

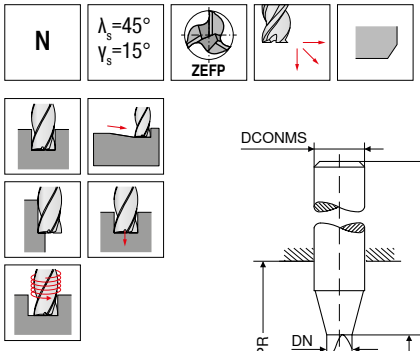

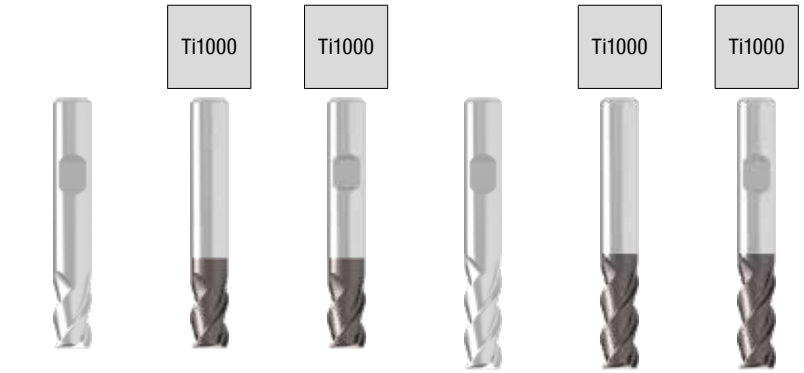



									Factory standard		Factory standard		Factory standard		Factory standard		Factory standard	
									HB		HA		HB		HB		HA		HB	
									V1		V1		V1		V1		V1		V1	
DC e8	APMX	DN	LH	LPR	OAL	CHW	DCONMS h6	ZEFP	Article no. 52 831 ...		Article no. 52 829 ...		Article no. 52 830 ...		Article no. 52 834 ...		Article no. 52 832 ...		Article no. 52 833 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
2,0	4	1,9	8	18	54	0,04	6	3	28,22	020	40,01	020	40,01	020						
2,0	7	1,9	10	22	58	0,04	6	3							31,52	020	44,97	020	44,97	020
2,5	5	2,4	8	18	54	0,07	6	3	28,22	025	39,68	025	39,68	025						
3,0	6	2,9	9	18	54	0,07	6	3	28,22	030	40,01	030	40,01	030						
3,0	10	2,9	14	22	58	0,07	6	3							31,52	030	44,97	030	44,97	030
4,0	7	3,8	12	18	54	0,07	6	3	28,22	040	40,01	040	40,01	040						
4,0	13	3,8	17	22	58	0,07	6	3							31,52	040	44,97	040	44,97	040
5,0	8	4,8	16	18	54	0,12	6	3	28,22	050	40,01	050	40,01	050						
5,0	15	4,8	19	22	58	0,07	6	3							31,52	050	44,97	050	44,97	050
6,0	10	5,8	16	18	54	0,12	6	3	28,22	060	40,01	060	40,01	060						
6,0	16	5,8	20	22	58	0,12	6	3							31,52	060	44,97	060	44,97	060
7,0	11	6,7	18	23	59	0,12	8	3	34,93	070	51,58	070	51,58	070						
7,0	19	6,7	23	34	70	0,12	8	3							38,91	070	56,53	070	56,53	070
8,0	12	7,7	20	23	59	0,12	8	3	31,52	080	47,16	080	47,16	080						
8,0	22	7,7	26	34	70	0,12	8	3							36,15	080	54,23	080	54,23	080
9,0	13	8,7	22	27	67	0,20	10	3	55,00	090	79,80	090	79,80	090						
9,0	23	8,7	28	33	73	0,12	10	3							69,54	090	97,22	090	97,22	090
10,0	14	9,7	24	27	67	0,20	10	3	49,82	100	71,75	100	71,75	100						
10,0	25	9,7	31	33	73	0,20	10	3							64,03	100	90,70	100	90,70	100
12,0	16	11,6	26	28	73	0,20	12	3	69,33	120	99,53	120	99,53	120						
12,0	28	11,6	37	39	84	0,20	12	3							85,42	120	122,30	120	122,30	120
14,0	18	13,6	28	30	75	0,20	14	3	95,77	140	133,30	140	133,30	140						
14,0	30	13,6	37	39	84	0,20	14	3							111,30	140	155,50	140	155,50	140
16,0	20	15,5	32	35	83	0,20	16	3	104,20	160	149,90	160	149,90	160						
16,0	35	15,5	43	45	93	0,20	16	3							134,50	160	197,30	160	197,30	160
18,0	20	17,5	34	37	85	0,20	18	3	137,80	180	194,00	180	194,00	180						
18,0	35	17,5	43	45	93	0,20	18	3							165,40	180	232,50	180	232,50	180
20,0	25	19,5	40	43	93	0,30	20	3	175,20	200	242,50	200	242,50	200						
20,0	40	19,5	52	54	104	0,20	20	3							216,00	200	296,50	200	296,50	200

Steel	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●
Cast iron	○	○	○	○	○	○
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys	●	●	●	●	●	●
hardened materials		○	○		○	○

→ v_c/f_z Page 350–353

End milling cutter

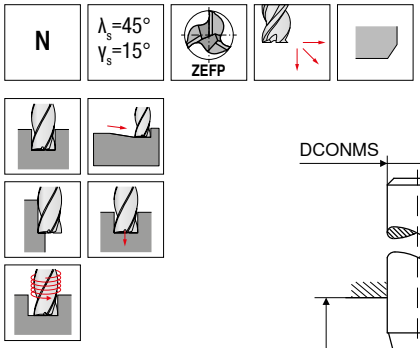

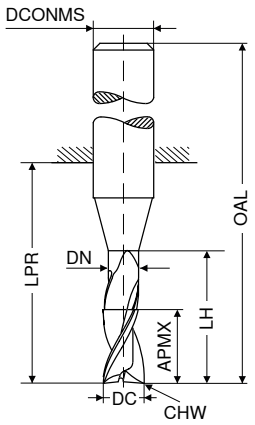

Factory standard | Factory standard

HA | HB

V1 | V1

DC e8	DN	APMX	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 52 835 ...		Article no. 52 836 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3	3,0	20	20	24	60	6	0,07	3	87,72	030	87,72	030
4	3,8	30	35	39	75	6	0,07	3	87,72	040	87,72	040
5	4,8	30	35	39	75	6	0,12	3	87,72	050	87,72	050
6	5,8	40	60	64	100	6	0,12	3	84,75	060	84,75	060
8	7,7	40	60	64	100	8	0,12	3	96,66	080	96,66	080
10	9,7	40	55	60	100	10	0,20	3	127,80	100	127,80	100
12	11,6	45	50	55	100	12	0,20	3	175,20	120	175,20	120
14	13,6	45	50	55	100	14	0,20	3	267,80	140	267,80	140
16	15,5	65	90	102	150	16	0,20	3	394,60	160	394,60	160
18	17,5	65	90	102	150	18	0,20	3	403,40	180	403,40	180
20	19,5	65	90	100	150	20	0,30	3	457,40	200	457,40	200

Steel	○	○
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	●	●
Heat resistant alloys	●	●
hardened materials	○	○

→ v_c/f_z Page 350–355

Mini milling cutter

▲ Shank similar to DIN 6535

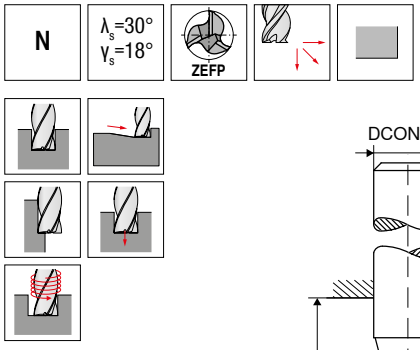

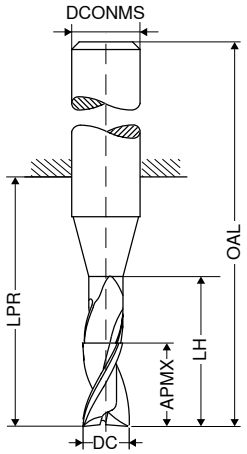



							Factory standard HB V0		Factory standard HB V0	
DC e8	APMX	LH	LPR	OAL	DCONMS h5	ZEFP	Article no. 50 598 ...		Article no. 50 599 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR	
2,00	4	4,0	10	35	6	3	16,97	020	23,81	020
2,50	4	4,0	10	35	6	3	18,30	025	25,24	025
3,00	5	5,0	10	36	6	3	16,97	030	23,81	030
3,50	5	5,0	10	36	6	3	18,30	035	25,36	035
4,00	7	7,0	12	38	6	3	16,97	040	23,81	040
4,50	7	7,0	12	38	6	3	18,30	045	25,36	045
5,00	8	8,0	13	39	6	3	16,97	050	23,81	050
5,50	8	8,0	13	39	6	3	18,30	055	25,36	055
5,75	8	8,0	13	39	6	3	18,30	057	25,36	057
6,00	8	8,5	13	39	6	3	16,97	060	23,81	060
6,75	11	11,5	16	43	8	3	24,14	067	32,29	067
7,00	11	11,5	16	43	8	3	23,25	070	29,98	070
7,75	11	11,5	16	43	8	3	24,36	077	32,62	077
8,00	11	11,5	16	43	8	3	26,68	080	32,07	080
8,70	13	13,5	18	50	10	3	38,03	087	47,83	087
9,00	13	13,5	18	50	10	3	34,72	090	44,30	090
9,70	13	13,5	18	50	10	3	38,03	097	47,83	097
10,00	13	13,5	18	50	10	3	37,80	100	45,85	100
12,00	15	15,5	24	55	12	3	49,26	120	59,52	120
14,00	15	15,5	26	58	14	3	84,31	140	94,45	140
16,00	18	18,5	28	62	16	3	94,57	160	108,00	160
18,00	20	20,5	35	70	18	3	120,10	180	134,50	180
20,00	22	22,5	40	75	20	3	152,10	200	166,50	200

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials		○

→ v_c/f_z Page 350–353

14

Mini milling cutter

▲ Shank similar to DIN 6535

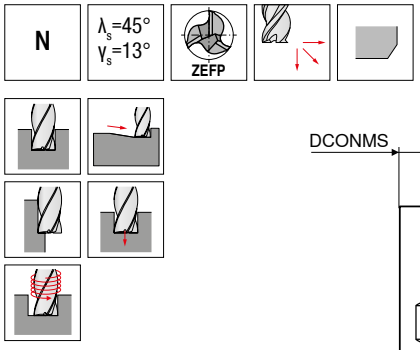

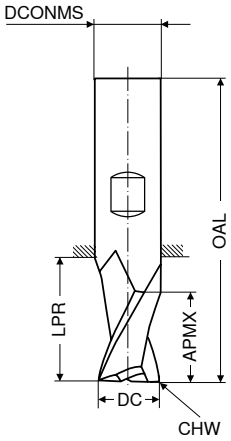

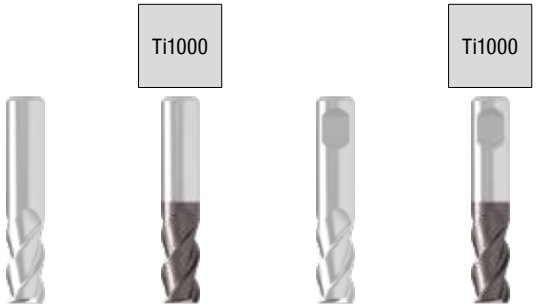

DC e8	APMX	LPR	OAL	DCONMS h5	CHW	ZEFP	Factory standard ~HA V0 Article no. 50 608 ...		Factory standard ~HA V0 Article no. 50 609 ...		Factory standard HB V0 Article no. 50 608 ...		Factory standard HB V0 Article no. 50 609 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
0,5	1,5	17	45	3	0,08	3	18,30	005	22,81	005				
1,0	2,0	17	45	3	0,08	3	18,30	010	22,81	010				
1,5	3,0	17	45	3	0,08	3	18,30	015	22,81	015				
1,8	3,0	17	45	3	0,08	3			22,81	018				
2,0	4,0	19	45	6	0,08	3					21,60	020	23,91	020
2,5	6,0	19	45	6	0,15	3					19,40	025	23,91	025
2,8	6,0	19	45	6	0,15	3							23,91	028
3,0	6,0	19	45	6	0,15	3					19,40	030	23,91	030
3,8	7,0	19	45	6	0,15	3							23,91	038
4,0	7,0	19	45	6	0,15	3					20,18	040	23,91	040
4,8	8,0	19	45	6	0,15	3							23,91	048
5,0	8,0	19	45	6	0,15	3					20,50	050	23,91	050
5,7	10,0	19	45	6	0,15	3							23,91	057
6,0	10,0	19	45	6	0,15	3					20,50	060	23,91	060
6,7	10,0	26	55	8	0,15	3							23,91	067
7,0	12,0	26	55	8	0,15	3					30,20	070	23,91	070
7,8	12,0	26	55	8	0,15	3							34,16	078
8,0	13,0	26	55	8	0,15	3					30,20	080	34,16	080
8,7	14,0	28	55	10	0,15	3							41,56	087
9,7	16,0	28	55	10	0,15	3							41,56	097
10,0	16,0	28	55	10	0,15	3					42,76	100	41,56	100
Steel							○		○		○		○	
Stainless steel							●		●		●		●	
Cast iron							○		○		○		○	
Non ferrous metals							○		○		○		○	
Heat resistant alloys							●		●		●		●	
hardened materials									●				●	

→ v_c/f_z Page 350–353

End milling cutter



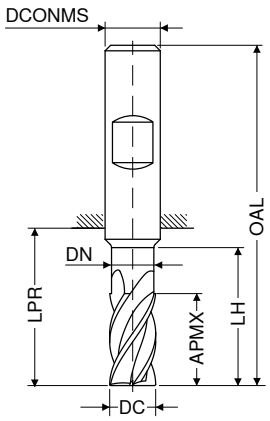

								Factory standard HB V1		Factory standard HB V1	
DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 309 ...		Article no. 52 313 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
2	4	1,9	8	18	54	6	4	28,10	020		
2	7			22	58	6	4			31,41	020
3	6	2,9	9	18	54	6	4	28,10	030		
3	10	2,8	14	22	58	6	4			31,41	030
4	7	3,8	12	18	54	6	4	28,10	040		
4	13	3,8	17	22	58	6	4			31,41	040
5	8	4,8	16	18	54	6	4	28,10	050		
5	15	4,8	19	22	58	6	4			31,41	050
6	10	5,8	16	18	54	6	4	28,10	060		
6	16	5,7	20	22	58	6	4			31,41	060
7	19	6,7	23	27	63	8	4			39,01	070
8	12	7,7	20	22	58	8	4	31,41	080		
8	22	7,7	26	34	70	8	4			36,04	080
9	23	8,7	28	33	73	10	4			68,22	090
10	14	9,7	24	26	66	10	4	49,48	100		
10	25	9,6	31	33	73	10	4			63,71	100
11	26	10,6	34	39	84	12	4			90,04	110
12	16	11,6	26	28	73	12	4	68,89	120		
12	28	11,6	37	39	84	12	4			85,09	120
14	18	13,6	28	30	75	14	4	95,45	140		
14	30	13,6	37	36	84	14	4			110,20	140
16	22	15,5	32	34	82	16	4	103,60	160		
16	35	15,6	43	45	93	16	4			134,50	160
18	20	17,5	34	36	80	18	4	135,50	180		
18	35	17,6	43	43	93	18	4			165,40	180
20	25	19,5	40	42	92	20	4	174,10	200		
20	40	19,6	52	54	104	20	4			215,00	200

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials		

→ v_c/f_z Page 350–353

End milling cutter

▲ Cutting edges with irregular pitch





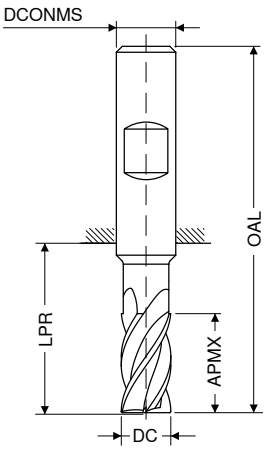

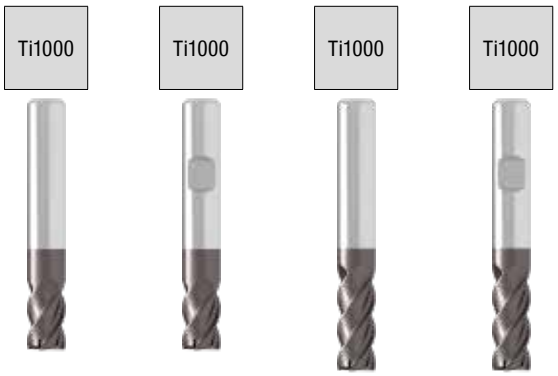

DIN 6527 | DIN 6527 | DIN 6527 | ≈DIN 6527

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC e8	APMX	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 121 ...		Article no. 52 131 ...		Article no. 52 126 ...		Article no. 52 132 ...	
mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3,0	6	18	54	6	4	50,92	030	49,05	030				
3,0	10	22	58	6	4					55,66	030	55,66	030
3,5	7	18	54	6	4	50,92	035	49,05	035				
3,5	13	22	58	6	4					55,66	035	55,66	035
4,0	7	18	54	6	4	50,92	040	49,05	040				
4,0	13	22	58	6	4					55,66	040	55,66	040
4,5	8	18	54	6	4	50,92	045	49,05	045				
4,5	15	22	58	6	4					55,66	045	55,66	045
5,0	8	18	54	6	4	50,92	050	49,05	050				
5,0	15	22	58	6	4					55,66	050	55,66	050
6,0	10	18	54	6	4	50,92	060	49,05	060				
6,0	16	22	58	6	4					55,66	060	55,66	060
8,0	12	23	59	8	4	59,07	080	56,66	080				
8,0	22	34	70	8	4					67,79	080	67,79	080
10,0	14	27	67	10	4	89,82	100	85,97	100				
10,0	25	33	73	10	4					111,30	100	111,30	100
12,0	16	28	73	12	4	123,50	120	117,90	120				
12,0	28	39	84	12	4					144,40	120	144,40	120
14,0	16	30	75	14	4	164,20	140	158,70	140				
14,0	30	39	84	14	4					177,50	140	177,50	140
16,0	20	35	83	16	4	183,00	160	175,20	160				
16,0	35	45	93	16	4					220,50	160	220,50	160
18,0	20	32	80	18	4	216,00	180	206,10	180				
18,0	35	45	93	18	4					260,10	180	260,10	180
20,0	25	43	93	20	4	271,10	200	259,10	200				
20,0	40	54	104	20	4					335,10	200	335,10	200

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–353

End milling cutter

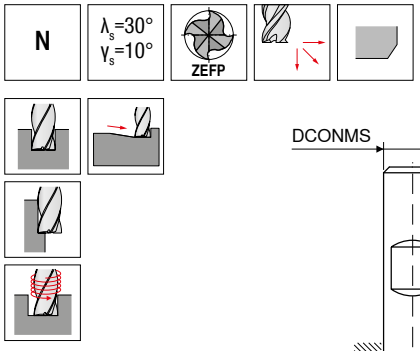

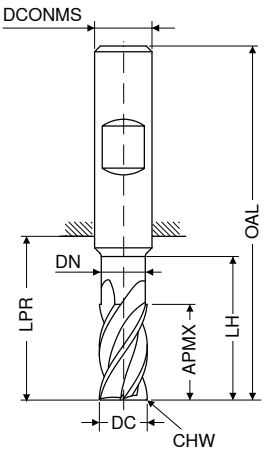

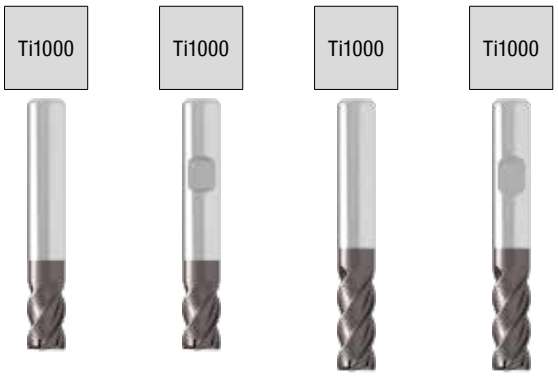



Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP 4	Article no. 52 306 ... EUR		Article no. 52 307 ... EUR		Article no. 52 310 ... EUR		Article no. 52 311 ... EUR	
1,5	3	1,4	6	10	38	3	0,02	4	34,50	015						
2,0	4	1,9	8	10	38	3	0,03	4	29,98	021						
2,0	4	1,9	8	18	54	6	0,03	4	34,72	020	34,72	020				
2,0	7			10	38	2	0,03	4					43,64	020		
2,5	4	2,4	8	10	38	3	0,04	4	29,98	025						
3,0	6	2,9	9	10	38	3	0,04	4	29,98	031						
3,0	6	2,9	9	18	54	6	0,04	4	34,72	030	34,72	030				
3,0	10	2,8	14	14	38	3	0,03	4					43,64	030		
4,0	7	3,8	12	18	54	6	0,05	4	34,72	040	34,72	040				
4,0	13	3,8	17	22	50	4	0,04	4					43,64	040		
5,0	8	4,8	16	18	54	6	0,06	4	34,72	050	34,72	050				
5,0	15	4,8	19	22	50	5	0,04	4					43,64	050		
6,0	10	5,8	16	18	54	6	0,07	4	34,72	060	34,72	060				
6,0	16	5,7	20	22	58	6	0,04	4					43,64	060	43,64	060
7,0	19	6,7	23	27	63	8	0,05	4					56,21	070	56,21	070
8,0	12	7,7	20	22	58	8	0,08	4	42,54	080	42,54	080				
8,0	22	7,7	26	34	70	8	0,06	4					53,46	080	53,46	080
9,0	23	8,7	28	33	73	10	0,07	4					96,77	090	96,77	090
10,0	14	9,7	24	26	66	10	0,10	4	65,79	100	65,79	100				
10,0	25	9,6	31	33	73	10	0,08	4					89,72	100	89,72	100
11,0	26	10,6	34	39	84	12	0,10	4					130,00	110	130,00	110
12,0	16	11,6	26	28	73	12	0,13	4	90,04	120	90,04	120				
12,0	28	11,6	37	39	84	12	0,13	4					121,30	120	121,30	120
14,0	18	13,6	28	30	75	14	0,15	4	122,30	140	122,30	140				
14,0	30	13,6	37	36	84	14	0,15	4					153,20	140	153,20	140
16,0	22	15,5	32	34	82	16	0,18	4	131,30	160	131,30	160				
16,0	35	15,6	43	45	93	16	0,18	4					194,00	160	194,00	160
18,0	20	17,5	34	36	80	18	0,18	4	176,30	180	176,30	180				
18,0	35	17,6	43	43	93	18	0,18	4					230,40	180	230,40	180
20,0	25	19,5	40	42	92	20	0,20	4	220,50	200	220,50	200				
20,0	40	19,6	52	54	104	20	0,20	4					295,40	200	295,40	200

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–353

14

End milling cutter

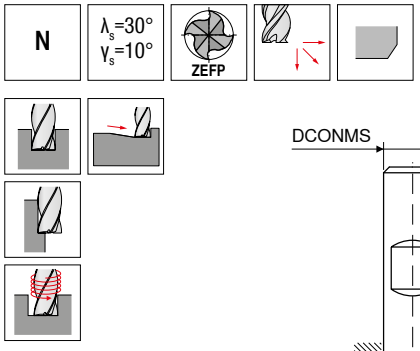

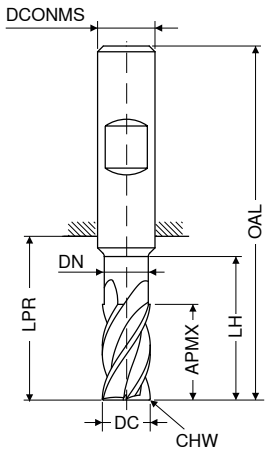

									Factory standard		Factory standard		Factory standard		Factory standard	
									HA		HA		HB		HB	
									V1		V1		V1		V1	
DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 52 315 ...		Article no. 52 314 ...		Article no. 52 315 ...		Article no. 52 314 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	16	2,8	32	47	75	3	0,04	4	37,91	032	45,30	032				
4	16	3,8	32	47	75	4	0,05	4	39,01	042	47,39	042				
4	20	3,8	48	72	100	4	0,05	4	43,53	043	50,69	043				
5	20	4,8	35	47	75	5	0,06	4	43,64	052	53,01	052				
5	25	4,8	55	72	100	5	0,06	4	46,29	053	59,19	053				
6	24	5,8	42	44	80	6	0,07	4					59,84	060	68,22	060
6	30	5,8	62	64	100	6	0,07	4					68,22	061	79,35	061
8	32	7,8	60	64	100	8	0,08	4					71,86	080	84,09	080
8	40	7,8	75	84	120	8	0,08	4					84,43	081	101,40	081
10	40	9,8	58	60	100	10	0,10	4					97,09	100	114,60	100
10	50	9,8	78	80	120	10	0,10	4					112,40	101	137,80	101
12	48	11,8	60	75	120	12	0,13	4					140,00	120	166,50	120
12	60	11,8	90	105	150	12	0,13	4					170,90	121	199,50	121
14	45	13,8	50	52	100	14	0,15	4					189,60	140	217,10	140
14	56	13,8	95	102	150	14	0,15	4					207,30	141	243,60	141
16	50	15,8	70	77	125	16	0,18	4					216,00	160	251,30	160
16	65	15,8	95	102	150	16	0,18	4					249,10	161	284,30	161
18	55	17,8	75	80	130	18	0,18	4					305,30	180	356,00	180
18	72	17,8	95	100	150	18	0,18	4					351,60	181	413,30	181
20	60	19,8	80	85	135	20	0,20	4					370,30	200	440,90	200
20	80	19,8	95	100	150	20	0,20	4					402,30	201	478,40	201
25	75	24,5	90	94	150	25	0,25	4					501,60	250	583,10	250

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials		○		○

→ v_c/f_z Page 350–355

End milling cutter with corner radius

▲ optimal quiet running with irregular helix



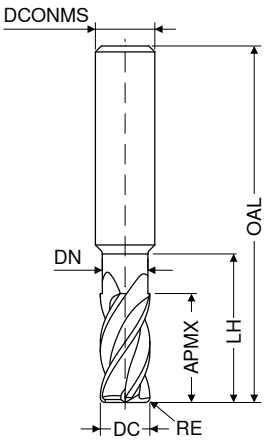

Factory standard

HA

DC e8	RE ±0,01	APMX	DN	LH	OAL	DCONMS h6	ZEFP	V1 Article no. 52 102 ...	
mm	mm	mm	mm	mm	mm	mm		EUR	
2	0,2	7	1,8	11	58	6	4	68,78	022
3	0,3	8	2,8	13	58	6	4	65,79	033
4	0,4	11	3,8	16	58	6	4	63,26	044
5	0,5	13	4,8	18	58	6	4	63,26	055
6	0,5	16	5,8	26	58	6	4	65,69	065
6	1,0	16	5,8	26	58	6	4	65,69	066
8	0,5	22	7,8	32	64	8	4	93,13	085
8	1,0	22	7,8	32	64	8	4	93,13	086
8	1,5	22	7,8	32	64	8	4	93,13	087
10	0,5	25	9,8	35	73	10	4	119,10	105
10	1,0	25	9,8	35	73	10	4	119,10	106
10	1,5	25	9,8	35	73	10	4	119,10	107
12	0,5	28	11,8	38	84	12	4	158,70	125
12	1,0	28	11,8	38	84	12	4	158,70	126
12	1,5	28	11,8	38	84	12	4	158,70	127

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	○

→ v_c/f_z Page 350–353

End milling cutter with corner radius

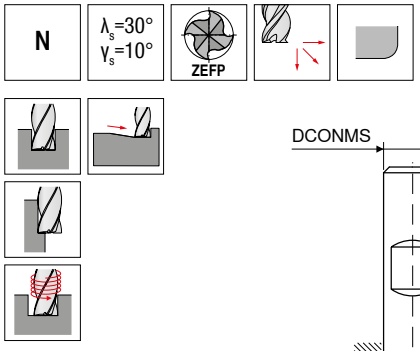

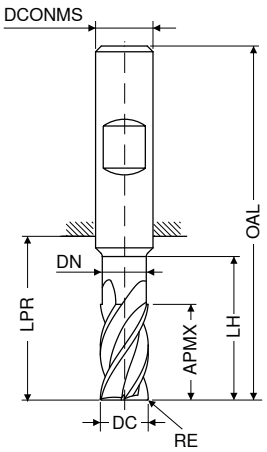

≈DIN 6527

HA

≈DIN 6527

HB

DC e8	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1 Article no. 52 316 ...		V1 Article no. 52 317 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3	0,3	8	2,8	13	21	57	6	4	69,11	031	69,11	031
3	0,5	8	2,8	13	21	57	6	4	69,11	032	69,11	032
4	0,3	11	3,8	16	21	57	6	4	67,67	041	67,12	041
4	0,5	11	3,8	16	21	57	6	4	67,67	042	67,67	042
5	0,3	13	4,8	18	21	57	6	4	67,67	051	67,67	051
5	0,5	13	4,8	18	21	57	6	4	67,67	052	67,67	052
6	0,5	13	5,8	26	31	57	6	4	59,07	062	59,07	062
6	1,0	13	5,8	26	31	57	6	4	59,07	064	59,07	064
6	1,5	13	5,8	26	31	57	6	4	60,51	065	60,51	065
8	0,5	19	7,8	32	35	63	8	4	89,94	082	89,94	082
8	1,0	19	7,8	32	35	63	8	4	89,94	084	89,94	084
8	1,5	19	7,8	32	35	63	8	4	94,57	085	94,57	085
8	2,0	19	7,8	32	35	63	8	4	94,57	086	94,57	086
10	1,0	22	9,8	35	36	72	10	4	112,40	104	112,40	104
10	1,5	22	9,8	35	36	72	10	4	117,90	105	117,90	105
10	2,0	22	9,8	35	36	72	10	4	117,90	106	117,90	106
12	1,0	26	11,8	38	38	83	12	4	149,90	124	149,90	124
12	1,5	26	11,8	38	38	83	12	4	154,30	125	154,30	125
12	2,0	26	11,8	38	38	83	12	4	154,30	126	154,30	126
12	3,0	26	11,8	38	38	83	12	4	155,50	128	155,50	128
16	1,0	32	15,8	44	44	92	16	4	249,10	164	249,10	164
16	1,5	32	15,8	44	44	92	16	4	254,60	165	254,60	165
16	2,0	32	15,8	44	44	92	16	4	254,60	166	254,60	166
16	3,0	32	15,8	44	44	92	16	4	256,80	168	256,80	168
20	1,5	38	19,8	52	54	104	20	4	381,40	205	381,40	205
20	2,0	38	19,8	52	54	104	20	4	381,40	206	381,40	206
20	3,0	38	19,8	52	54	104	20	4	383,60	208	383,60	208

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–353

End milling cutter

- ▲ irregular helix angle
- ▲ 54 050 ... / 54 051 ... / 54 052 ...: special cutting edge preperation for the machining of steel
- ▲ 54 060 ... / 54 061 ... / 54 062 ...: special cutting edge preperation for the machining of stainless steel

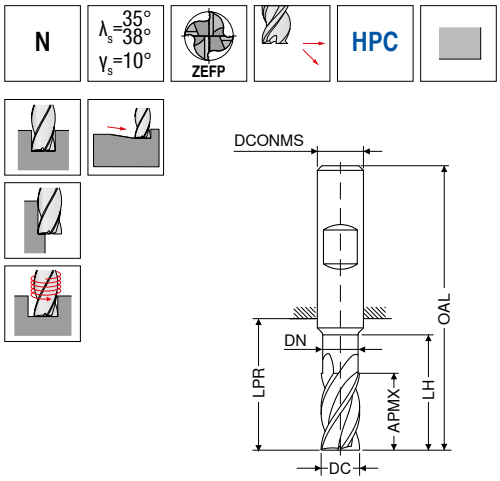

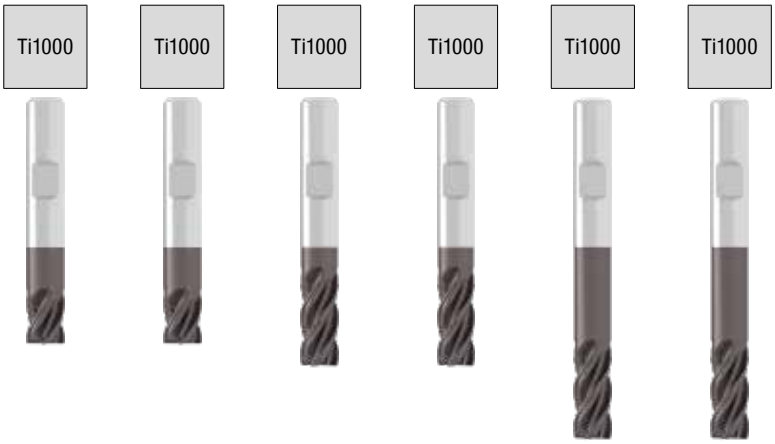

DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	≈DIN 6527 HB V3 Article no. 54 050 ... EUR		≈DIN 6527 HB V3 Article no. 54 060 ... EUR		≈DIN 6527 HB V3 Article no. 54 051 ... EUR		≈DIN 6527 HB V3 Article no. 54 061 ... EUR		≈DIN 6527 HB V3 Article no. 54 052 ... EUR		≈DIN 6527 HB V3 Article no. 54 062 ... EUR	
mm	mm	mm	mm	mm	mm	mm													
3	5			14	50	6	4	15,76	030	17,08	030								
3	8	2,8	12	21	57	6	4					15,76	030	17,08	030				
3	8	2,8	15	34	70	6	4									22,26	030	24,14	030
4	8			18	54	6	4	15,76	040	17,08	040								
4	11	3,8	15	21	57	6	4					15,76	040	17,08	040				
4	11	3,8	20	34	70	6	4									22,26	040	24,14	040
5	9			18	54	6	4	15,76	050	17,08	050								
5	13	4,8	17	21	57	6	4					15,76	050	17,08	050				
5	13	4,8	25	34	70	6	4									25,13	050	27,11	050
6	10			18	54	6	4	15,76	060	17,08	060								
6	13	5,8	21	21	57	6	4					18,51	060	19,95	060				
6	13	5,8	30	34	70	6	4									28,10	060	30,31	060
8	12			22	58	8	4	22,26	080	24,02	080								
8	19	7,7	27	27	63	8	4					23,81	080	25,78	080				
8	19	7,7	40	44	80	8	4									35,60	080	38,46	080
10	14			26	66	10	4	28,88	100	31,19	100								
10	22	9,7	32	32	72	10	4					31,30	100	33,96	100				
10	22	9,7	50	54	94	10	4									49,48	100	53,56	100
12	16			28	73	12	4	41,43	120	44,86	120								
12	26	11,6	38	38	83	12	4					49,82	120	53,89	120				
12	26	11,6	64	64	109	12	4									60,94	120	66,02	120
16	22			34	82	16	4	72,63	160	78,58	160								
16	32	15,5	44	44	92	16	4					76,71	160	82,99	160				
16	32	15,5	80	84	132	16	4									115,80	160	124,60	160
20	26			42	92	20	4	108,00	200	116,80	200								
20	38	19,5	54	54	104	20	4					115,80	200	125,70	200				
20	38	19,5	100	104	154	20	4									157,60	200	170,90	200

Steel	●	●	●	●	●	●
Stainless steel		●		●		●
Cast iron	●	○	●	○	●	○
Non ferrous metals		○		○		○
Heat resistant alloys		●		●		●
hardened materials						

→ v_c/f_z Page 340–343

14

End milling cutter

- ▲ irregular helix angle
- ▲ 54 001 ... / 54 002 ... / 54 003 ...: special cutting edge preperation for the machining of steel
- ▲ 54 004 ... / 54 005 ... / 54 006 ...: special cutting edge preperation for the machining of stainless steel



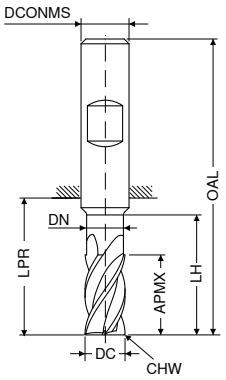

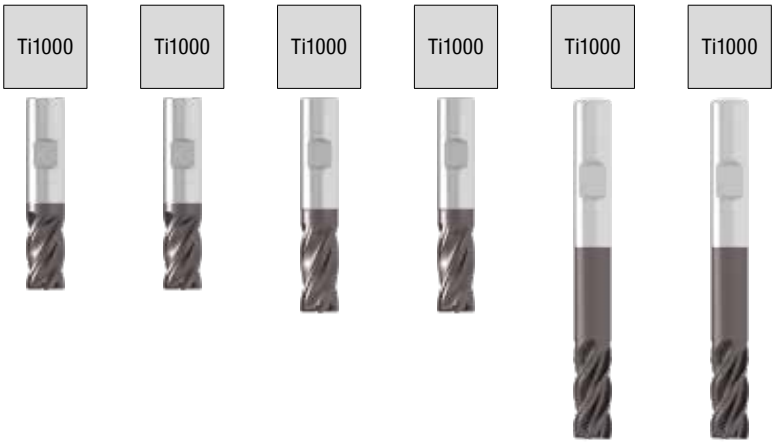



DC h10/	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	≈DIN 6527 HB V3 Article no. 54 001 ... EUR		≈DIN 6527 HB V3 Article no. 54 005 ... EUR		≈DIN 6527 HB V3 Article no. 54 002 ... EUR		≈DIN 6527 HB V3 Article no. 54 006 ... EUR		≈DIN 6527 HB V3 Article no. 54 003 ... EUR		≈DIN 6527 HB V3 Article no. 54 004 ... EUR	
mm	mm	mm	mm	mm	mm	mm	mm													
3,0	5			14	50	6	0,15	4	15,87	030	17,08	030								
3,0	8	2,8	12,0	21	57	6	0,15	4					15,87	030	17,08	030				
3,0	8	2,8	15,0	34	70	6	0,15	4									22,26	030	24,14	030
4,0	8			18	54	6	0,15	4	15,87	040	17,08	040								
4,0	11	3,8	15,0	21	57	6	0,15	4					15,87	040	17,08	040				
4,0	11	3,8	20,0	34	70	6	0,15	4									22,26	040	24,14	040
5,0	9			18	54	6	0,15	4	15,87	050	17,08	050								
5,0	13	4,8	17,0	21	57	6	0,15	4					15,87	050	17,08	050				
5,0	13	4,8	25,0	34	70	6	0,15	4									25,13	050	27,11	050
6,0	10			18	54	6	0,15	4	15,87	060	17,08	060								
6,0	13	5,8	21,0	21	57	6	0,15	4					18,51	060	20,06	060				
6,0	13	5,8	30,0	34	70	6	0,15	4									28,10	060	30,31	060
8,0	12			22	58	8	0,25	4	22,15	080	24,14	080								
8,0	19	7,7	27,0	27	63	8	0,25	4					23,81	080	25,91	080				
8,0	19	7,7	40,0	44	80	8	0,25	4									35,60	080	38,46	080
10,0	14			26	66	10	0,25	4	28,88	100	31,30	100								
10,0	22	9,7	32,0	32	72	10	0,25	4					31,30	100	33,96	100				
10,0	22	9,7	50,0	54	94	10	0,25	4									49,48	100	53,56	100
12,0	16			28	73	12	0,35	4	41,56	120	44,97	120								
12,0	26	11,6	38,0	38	83	12	0,35	4					49,82	120	54,01	120				
12,0	26	11,6	64,0	64	109	12	0,35	4									60,94	120	66,02	120
16,0	22			34	82	16	0,35	4	72,74	160	78,70	160								
16,0	32	15,5	44,0	44	92	16	0,35	4					76,81	160	83,32	160				
16,0	32	15,5	80,0	84	132	16	0,35	4									115,80	160	124,60	160
20,0	26			42	92	20	0,35	4	108,10	200	116,80	200								
20,0	38	19,5	54,0	54	104	20	0,35	4					116,80	200	125,70	200				
20,0	38	19,5	100,0	104	154	20	0,35	4									157,60	200	170,90	200
Steel									●		●		●		●		●		●	
Stainless steel											●				●				●	
Cast iron									●		○		●		○		●		○	
Non ferrous metals											○				○				○	
Heat resistant alloys											●				●				●	
hardened materials																				

→ v_c/f_z Page 340–343

End milling cutter with corner radius

- ▲ irregular helix angle
- ▲ 54 053 ... / 54 054 ...: special cutting edge preperation for the machining of steel
- ▲ 54 063 ... / 54 064 ...: special cutting edge preperation for the machining of stainless steel



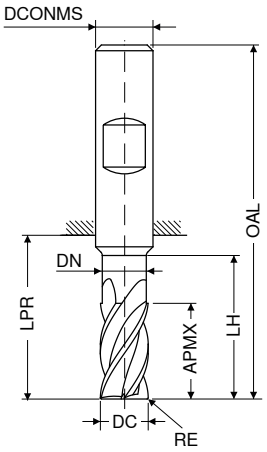

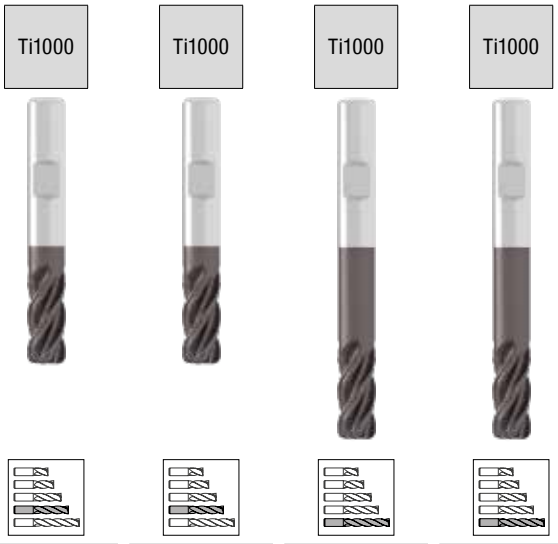

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

HB | HB | HB | HB

V3 | V3 | V3 | V3

DC h10 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP 4	Article no. 54 053 ... EUR		Article no. 54 063 ... EUR		Article no. 54 054 ... EUR		Article no. 54 064 ... EUR	
3	0,1	8	2,8	12	21	57	6	4	20,61	03001	22,38	03001				
3	0,1	8	2,8	15	34	70	6	4					27,23	03001	29,43	03001
3	0,3	8	2,8	12	21	57	6	4	20,61	03003	22,38	03003				
3	0,3	8	2,8	15	34	70	6	4					27,23	03003	29,43	03003
3	0,5	8	2,8	12	21	57	6	4	20,61	03005	22,38	03005				
3	0,5	8	2,8	15	34	70	6	4					27,23	03005	29,43	03005
3	1,0	8	2,8	12	21	57	6	4	20,61	03010	22,38	03010				
3	1,0	8	2,8	15	34	70	6	4					27,23	03010	29,43	03010
4	0,1	11	3,8	15	21	57	6	4	20,61	04001	22,38	04001				
4	0,1	11	3,8	20	34	70	6	4					27,23	04001	29,43	04001
4	0,3	11	3,8	15	21	57	6	4	20,61	04003	22,38	04003				
4	0,3	11	3,8	20	34	70	6	4					27,23	04003	29,43	04003
4	0,5	11	3,8	15	21	57	6	4	20,61	04005	22,38	04005				
4	0,5	11	3,8	20	34	70	6	4					27,23	04005	29,43	04005
4	1,0	11	3,8	15	21	57	6	4	20,61	04010	22,38	04010				
4	1,0	11	3,8	20	34	70	6	4					27,23	04010	29,43	04010
5	0,1	13	4,8	17	21	57	6	4	20,61	05001	22,38	05001				
5	0,1	13	4,8	25	34	70	6	4					29,98	05001	32,41	05001
5	0,3	13	4,8	17	21	57	6	4	20,61	05003	22,38	05003				
5	0,3	13	4,8	25	34	70	6	4					29,98	05003	32,41	05003
5	0,5	13	4,8	17	21	57	6	4	20,61	05005	22,38	05005				
5	0,5	13	4,8	25	34	70	6	4					29,98	05005	32,41	05005
5	1,0	13	4,8	17	21	57	6	4	20,61	05010	22,38	05010				
5	1,0	13	4,8	25	34	70	6	4					29,98	05010	32,41	05010
6	0,1	13	5,8	21	21	57	6	4	22,81	06001	24,69	06001				
6	0,1	13	5,8	30	34	70	6	4					33,73	06001	36,48	06001
6	0,3	13	5,8	21	21	57	6	4	22,81	06003	24,69	06003				
6	0,3	13	5,8	30	34	70	6	4					33,73	06003	36,48	06003
6	0,5	13	5,8	21	21	57	6	4	22,81	06005	24,69	06005				
6	0,5	13	5,8	30	34	70	6	4					33,73	06005	36,48	06005
6	1,0	13	5,8	21	21	57	6	4	22,81	06010	24,69	06010				
6	1,0	13	5,8	30	34	70	6	4					33,73	06010	36,48	06010
6	1,5	13	5,8	21	21	57	6	4	22,81	06015	24,69	06015				
6	1,5	13	5,8	30	34	70	6	4					33,73	06015	36,48	06015
6	2,0	13	5,8	21	21	57	6	4	22,81	06020	24,69	06020				
6	2,0	13	5,8	30	34	70	6	4					33,73	06020	36,48	06020
8	0,1	19	7,7	27	27	63	8	4	29,86	08001	32,41	08001				
8	0,1	19	7,7	40	44	80	8	4					44,97	08001	48,71	08001
8	0,3	19	7,7	27	27	63	8	4	29,86	08003	32,41	08003				
8	0,3	19	7,7	40	44	80	8	4					44,97	08003	48,71	08003
8	0,5	19	7,7	27	27	63	8	4	29,86	08005	32,41	08005				
8	0,5	19	7,7	40	44	80	8	4					44,97	08005	48,71	08005

Steel	●	●	●	●
Stainless steel		●		●
Cast iron	●	○	●	○
Non ferrous metals		○		○
Heat resistant alloys		●		●
hardened materials				

→ v_c/f_z Page 340–343

14

Continued on next page

End milling cutter with corner radius

- ▲ irregular helix angle
- ▲ 54 053 ... / 54 054 ...: special cutting edge preperation for the machining of steel
- ▲ 54 063 ... / 54 064 ...: special cutting edge preperation for the machining of stainless steel

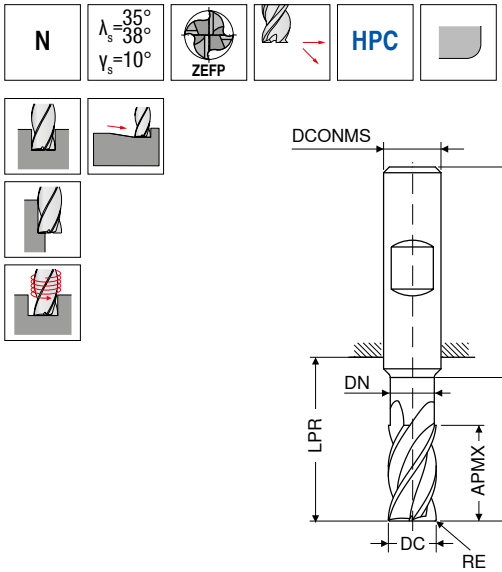

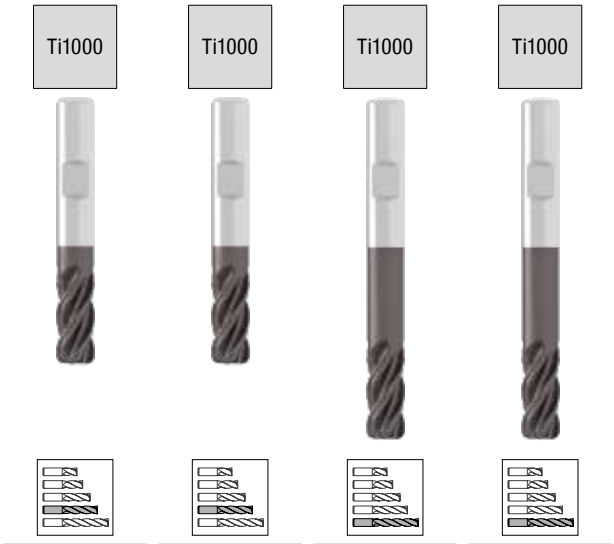

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

HB | HB | HB | HB

V3 | V3 | V3 | V3

DC h10 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 54 053 ... EUR		Article no. 54 063 ... EUR		Article no. 54 054 ... EUR		Article no. 54 064 ... EUR	
8	1,0	19	7,7	27	27	63	8	4	29,86	08010	32,41	08010				
8	1,0	19	7,7	40	44	80	8	4					44,97	08010	48,71	08010
8	1,5	19	7,7	27	27	63	8	4	29,86	08015	32,41	08015				
8	1,5	19	7,7	40	44	80	8	4					44,97	08015	48,71	08015
8	1,6	19	7,7	27	27	63	8	4	29,86	08016	32,41	08016				
8	1,6	19	7,7	40	44	80	8	4					44,97	08016	48,71	08016
8	2,0	19	7,7	27	27	63	8	4	29,86	08020	32,41	08020				
8	2,0	19	7,7	40	44	80	8	4					44,97	08020	48,71	08020
10	0,1	22	9,7	32	32	72	10	4	37,80	10001	40,88	10001				
10	0,1	22	9,7	50	54	94	10	4					60,07	10001	65,02	10001
10	0,3	22	9,7	32	32	72	10	4	37,80	10003	40,88	10003				
10	0,3	22	9,7	50	54	94	10	4					60,07	10003	65,02	10003
10	0,5	22	9,7	32	32	72	10	4	37,80	10005	40,88	10005				
10	0,5	22	9,7	50	54	94	10	4					60,07	10005	65,02	10005
10	1,0	22	9,7	32	32	72	10	4	37,80	10010	40,88	10010				
10	1,0	22	9,7	50	54	94	10	4					60,07	10010	65,02	10010
10	1,5	22	9,7	32	32	72	10	4	37,80	10015	40,88	10015				
10	1,5	22	9,7	50	54	94	10	4					60,07	10015	65,02	10015
10	1,6	22	9,7	32	32	72	10	4	37,80	10016	40,88	10016				
10	1,6	22	9,7	50	54	94	10	4					60,07	10016	65,02	10016
10	2,0	22	9,7	32	32	72	10	4	37,80	10020	40,88	10020				
10	2,0	22	9,7	50	54	94	10	4					60,07	10020	65,02	10020
12	0,1	26	11,6	38	38	83	12	4	58,42	12001	63,26	12001				
12	0,1	26	11,6	64	64	109	12	4					87,84	12001	95,12	12001
12	0,3	26	11,6	38	38	83	12	4	58,42	12003	63,26	12003				
12	0,3	26	11,6	64	64	109	12	4					87,84	12003	95,12	12003
12	0,5	26	11,6	38	38	83	12	4	58,42	12005	63,26	12005				
12	0,5	26	11,6	64	64	109	12	4					87,84	12005	95,12	12005
12	1,0	26	11,6	38	38	83	12	4	58,42	12010	63,26	12010				
12	1,0	26	11,6	64	64	109	12	4					87,84	12010	95,12	12010
12	1,5	26	11,6	38	38	83	12	4	58,42	12015	63,26	12015				
12	1,5	26	11,6	64	64	109	12	4					87,84	12015	95,12	12015
12	1,6	26	11,6	38	38	83	12	4	58,42	12016	63,26	12016				
12	1,6	26	11,6	64	64	109	12	4					87,84	12016	95,12	12016
12	2,0	26	11,6	38	38	83	12	4	58,42	12020	63,26	12020				
12	2,0	26	11,6	64	64	109	12	4					87,84	12020	95,12	12020
12	3,0	26	11,6	38	38	83	12	4	58,42	12030	63,26	12030				
12	3,0	26	11,6	64	64	109	12	4					87,84	12030	95,12	12030
16	0,1	32	15,5	44	44	92	16	4	88,28	16001	95,56	16001				
16	0,1	32	15,5	80	84	132	16	4					136,80	16001	147,80	16001
16	0,3	32	15,5	44	44	92	16	4	88,28	16003	95,56	16003				
16	0,3	32	15,5	80	84	132	16	4					136,80	16003	147,80	16003

Steel	●	●	●	●
Stainless steel		●		●
Cast iron	●	○	●	○
Non ferrous metals		○		○
Heat resistant alloys		●		●
hardened materials				

→ v_c/f_z Page 340-343

Continued on next page

End milling cutter with corner radius

- ▲ irregular helix angle
- ▲ 54 053 ... / 54 054 ...: special cutting edge preperation for the machining of steel
- ▲ 54 063 ... / 54 064 ...: special cutting edge preperation for the machining of stainless steel



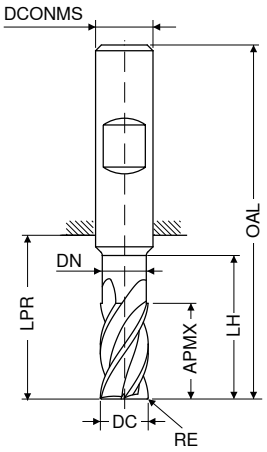

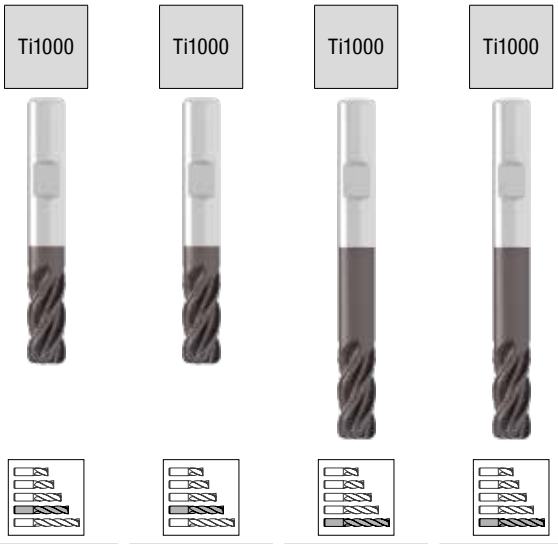

									≈DIN 6527		≈DIN 6527		≈DIN 6527		≈DIN 6527	
									HB		HB		HB		HB	
									V3		V3		V3		V3	
DC h10	RE	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	Article no. 54 053 ...		Article no. 54 063 ...		Article no. 54 054 ...		Article no. 54 064 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
16	0,5	32	15,5	44	44	92	16	4	88,28	16005	95,56	16005				
16	0,5	32	15,5	80	84	132	16	4					136,80	16005	147,80	16005
16	1,0	32	15,5	44	44	92	16	4	88,28	16010	95,56	16010				
16	1,0	32	15,5	80	84	132	16	4					136,80	16010	147,80	16010
16	1,5	32	15,5	44	44	92	16	4	88,28	16015	95,56	16015				
16	1,5	32	15,5	80	84	132	16	4					136,80	16015	147,80	16015
16	1,6	32	15,5	44	44	92	16	4	88,28	16016	95,56	16016				
16	1,6	32	15,5	80	84	132	16	4					136,80	16016	147,80	16016
16	2,0	32	15,5	44	44	92	16	4	88,28	16020	95,56	16020				
16	2,0	32	15,5	80	84	132	16	4					136,80	16020	147,80	16020
16	3,0	32	15,5	44	44	92	16	4	88,28	16030	95,56	16030				
16	3,0	32	15,5	80	84	132	16	4					136,80	16030	147,80	16030
16	4,0	32	15,5	44	44	92	16	4	88,28	16040	95,56	16040				
16	4,0	32	15,5	80	84	132	16	4					136,80	16040	147,80	16040
20	0,1	38	19,5	54	54	104	20	4	127,80	20001	138,80	20001				
20	0,1	38	19,5	100	104	154	20	4					200,60	20001	217,10	20001
20	0,3	38	19,5	54	54	104	20	4	127,80	20103	138,80	20003				
20	0,3	38	19,5	100	104	154	20	4					200,60	20003	217,10	20003
20	0,5	38	19,5	54	54	104	20	4	127,80	20205	138,80	20005				
20	0,5	38	19,5	100	104	154	20	4					200,60	20005	217,10	20005
20	1,0	38	19,5	54	54	104	20	4	127,80	20310	138,80	20010				
20	1,0	38	19,5	100	104	154	20	4					200,60	20010	217,10	20010
20	1,5	38	19,5	54	54	104	20	4	127,80	20415	138,80	20015				
20	1,5	38	19,5	100	104	154	20	4					200,60	20015	217,10	20015
20	1,6	38	19,5	54	54	104	20	4	127,80	20516	138,80	20016				
20	1,6	38	19,5	100	104	154	20	4					200,60	20016	217,10	20016
20	2,0	38	19,5	54	54	104	20	4	127,80	20620	138,80	20020				
20	2,0	38	19,5	100	104	154	20	4					200,60	20020	217,10	20020
20	3,0	38	19,5	54	54	104	20	4	127,80	20730	138,80	20030				
20	3,0	38	19,5	100	104	154	20	4					200,60	20030	217,10	20030
20	4,0	38	19,5	54	54	104	20	4	127,80	20840	138,80	20040				
20	4,0	38	19,5	100	104	154	20	4					200,60	20040	217,10	20040

Steel	●	●	●	●
Stainless steel		●		●
Cast iron	●	○	●	○
Non ferrous metals		○		○
Heat resistant alloys		●		●
hardened materials				

→ v_c/f_z Page 340–343

14

Finish milling cutter



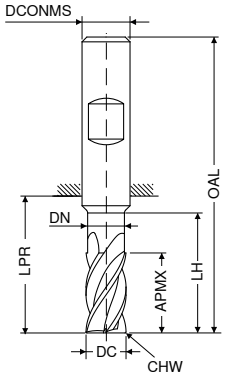

LPR with Shank DIN 6535 HB

									Factory standard HA V1		Factory standard HB V1		Factory standard HA V1		Factory standard HB V1		Factory standard HA V1		Factory standard HB V1	
DC_{e8}	APMX	DN	LH	LPR	OAL	$DCONMS_{h6}$	CHW	ZEFP	Article no. 52 110 ...		Article no. 52 110 ...		Article no. 52 115 ...		Article no. 52 115 ...		Article no. 52 118 ...		Article no. 52 118 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
5	8	4,8	13	18	54	6	0,02	6	35,16	051	35,16	050								
5	13	4,8	18	22	58	6	0,02	6					36,04	051	36,04	050				
6	10	5,8	15	18	54	6	0,03	6	34,38	061	34,38	060								
6	16	5,8	20	22	58	6	0,03	6					34,93	061	34,93	060				
6	21			29	65	6	0,03	6									49,93	061	49,93	060
7	12	6,8	17	23	59	8	0,04	6	41,43	071	41,43	070								
7	22	6,8	30	34	70	8	0,04	6					42,33	071	42,33	070				
7	25			39	75	8	0,04	6									63,92	071	63,92	070
8	12	7,8	17	23	59	8	0,04	6	40,78	081	40,78	080								
8	22	7,8	32	34	70	8	0,04	6					43,53	081	43,53	080				
8	28			39	75	8	0,04	6									57,76	081	57,76	080
9	14	8,8	19	20	60	10	0,04	6	62,39	091	62,39	090								
9	25	8,8	33	33	73	10	0,04	6					69,21	091	69,21	090				
9	30			45	85	10	0,04	6									121,30	091	121,30	090
10	14	9,8	19	20	60	10	0,05	6	61,84	101	61,84	100								
10	25	9,8	33	33	73	10	0,05	6					69,76	101	69,76	100				
10	35			45	85	10	0,05	6									112,40	101	112,40	100
12	16	11,8	21	25	70	12	0,05	6	89,72	121	89,72	120								
12	28	11,8	38	39	84	12	0,05	6					97,32	121	97,32	120				
12	45			55	100	12	0,05	6									157,60	121	157,60	120
14	18	13,8	23	25	70	14	0,06	6	117,90	141	117,90	140								
14	30	13,8	38	39	84	14	0,06	6					131,30	141	131,30	140				
16	20	15,8	28	32	80	16	0,06	6	142,30	161	142,30	160								
16	35	15,8	43	45	93	16	0,06	6					161,00	161	161,00	160				
16	50			62	110	16	0,06	6									227,00	162	227,00	160
16	65			77	125	16	0,06	6									254,60	163	254,60	161
18	20	17,8	28	32	80	18	0,07	8	176,30	181	176,30	180								
18	35	17,8	43	45	93	18	0,07	8					200,60	181	200,60	180				
20	25	19,8	33	35	85	20	0,07	8	220,50	201	220,50	200								
20	40	19,8	45	50	100	20	0,07	8					251,30	201	251,30	200				
20	55			65	115	20	0,07	8									338,30	202	338,30	200
20	70			80	130	20	0,07	8									404,60	203	404,60	201
25	55	24,8	63	69	125	25	0,08	8					423,30	251	423,30	250				
25	75			94	150	25	0,08	8									684,40	251	684,40	250

Steel	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●
Cast iron	○	○	○	○	○	○
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys	●	●	●	●	●	●
hardened materials						

→ v_c/f_z Page 350–355

Finish milling cutter

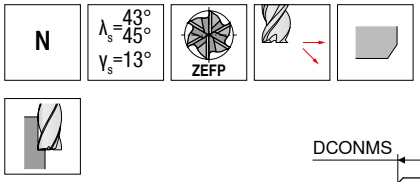

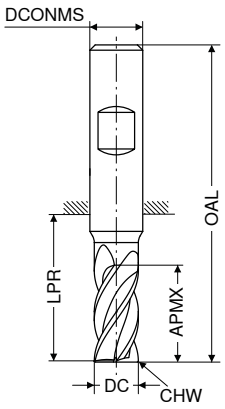

	≈DIN 6527	Factory standard
	HB	HB
	V0	V0
DC f8 mm	Article no. 50 633 ... EUR	Article no. 50 633 ... EUR
4	11 21 57 6 0,15 6	41,88 040
4	16 26 62 6 0,15 6	59,29 041
5	13 21 57 6 0,15 6	41,88 050
5	18 26 62 6 0,15 6	59,29 051
6	13 21 57 6 0,15 6	41,88 060
6	18 26 62 6 0,15 6	59,29 061
7	16 27 63 8 0,15 6	51,14 070
7	21 32 68 8 0,15 6	77,59 071
8	19 27 63 8 0,15 6	48,93 080
8	24 32 68 8 0,15 6	68,44 081
9	19 32 72 10 0,15 6	80,89 090
9	27 40 80 10 0,15 6	123,50 091
10	22 32 72 10 0,15 6	78,47 100
10	30 40 80 10 0,15 6	121,30 101
12	26 38 83 12 0,15 6	104,30 120
12	36 48 93 12 0,15 6	164,20 121
14	26 38 83 14 0,15 6	142,30 140
14	42 54 99 14 0,15 6	222,60 141
16	32 44 92 16 0,15 6	187,30 160
16	48 60 108 16 0,15 6	284,30 161
16	65 77 125 16 0,15 6	358,30 162
16	75 102 150 16 0,15 6	401,10 163
16	95 102 150 16 0,15 6	465,10 164
18	32 44 92 18 0,15 8	217,10 180
18	54 66 114 18 0,15 8	348,30 181
20	38 54 104 20 0,15 8	266,80 200
20	60 76 126 20 0,15 8	446,40 201
20	75 85 135 20 0,15 8	471,60 202
20	95 100 150 20 0,15 8	489,30 203
25	75 94 150 25 0,15 8	648,10 250
25	95 104 160 25 0,15 8	689,90 251
32	75 90 150 32 0,15 8	1.246,00 320
32	95 100 160 32 0,15 8	1.294,00 321

Steel	○	○
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials	●	●

→ v_c/f_z Page 350–355

14

Finish milling cutter with corner radius

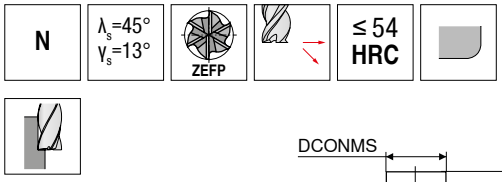

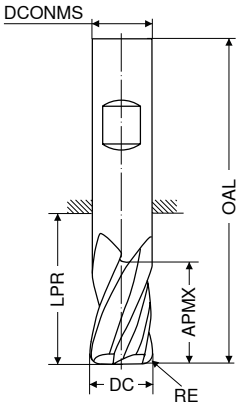

Factory standard

DC f8	RE ±0,01	APMX	LPR	OAL	DCONMS h5	ZEFP	V0 Article no. 50 634 ... EUR	
mm	mm	mm	mm	mm	mm			
6	1,0	18	26	62	6	6	56,43	061
6	0,5	18	26	62	6	6	56,43	060
8	2,0	24	32	68	8	6	56,10	082
8	1,0	24	32	68	8	6	56,10	081
8	0,5	24	32	68	8	6	56,10	080
10	0,5	30	40	80	10	6	114,60	100
10	2,0	30	40	80	10	6	114,60	102
10	1,0	30	40	80	10	6	114,60	101
12	2,0	36	48	93	12	6	151,00	122
12	1,0	36	48	93	12	6	151,00	121
12	3,0	36	48	93	12	6	151,00	123
12	0,5	36	48	93	12	6	151,00	120
16	2,0	48	60	108	16	6	270,10	162
16	1,0	48	60	108	16	6	270,10	161
16	3,0	48	60	108	16	6	270,10	163
16	0,5	48	60	108	16	6	270,10	160
20	0,5	60	76	126	20	8	403,40	200
20	2,0	60	76	126	20	8	403,40	202
20	3,0	60	76	126	20	8	403,40	203
20	1,0	60	76	126	20	8	403,40	201

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	●
hardened materials	●

→ v_c/f_z Page 350–355

Multi-flute milling cutter

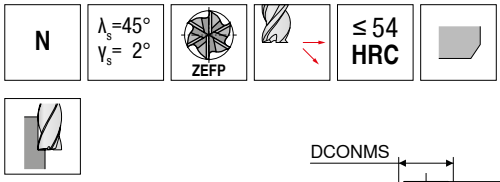

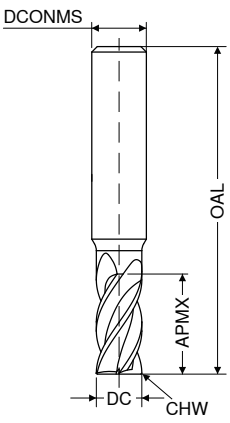

Factory standard

V0

DC h10 mm	APMX mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 631 ... EUR	
4	14	40	4	0,05	5	37,14	040
5	18	50	5	0,05	5	41,11	050
6	18	50	6	0,05	7	45,64	060
8	25	63	8	0,05	7	66,34	080
10	30	72	10	0,08	9	94,67	100
12	32	83	12	0,08	9	123,50	120
14	32	83	14	0,08	9	179,60	140
16	36	92	16	0,08	11	260,10	160
18	40	92	18	0,08	11	295,40	180
20	45	104	20	0,08	13	347,20	200
25	45	120	25	0,08	13	632,60	250

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	●
hardened materials	

→ v_c/f_z Page 350–353

Multi-flute milling cutter for finishing

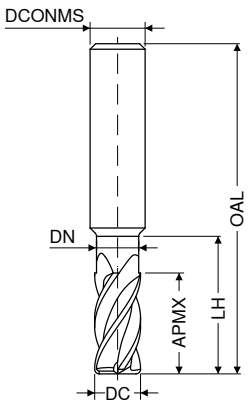

Factory standard

HA

V1

DC e8 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 109 ...	EUR
6	16	5,8	26	58	6	8	**060**	57,09
8	22	7,8	32	64	8	10	**080**	65,24
10	25	9,8	35	73	10	12	**100**	111,30
12	28	11,8	38	84	12	12	**120**	151,00
16	35	15,8	43	93	16	16	**160**	322,90
20	40	19,8	50	104	20	16	**200**	380,30

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	○

→ v_c/f_z Page 350–353

End milling cutter

▲ With graduated flute depth

H | λ_s= 52° γ_s=–11° | ZEFP | ≤ 54 HRC



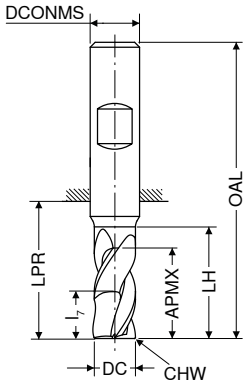

DIN 6527 | DIN 6527 | DIN 6527

HB | HB | HB

V0 | V0 | V0

DC f8 mm	APMX mm	LH mm	l_7 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 907 ...	EUR	Article no. 50 907 ...	EUR	Article no. 50 907 ...	EUR
4	8	15	4,4	18	54	6	0,15	4	040	55,11				
4	11	18	4,4	21	57	6	0,15	4			041	55,11		
4	16	19	6,4	26	62	6	0,15	4					042	60,07
5	9	16	4,8	18	54	6	0,15	4	050	55,11				
5	13	19	4,8	21	57	6	0,15	4			051	55,11		
5	17	20	6,8	26	62	6	0,15	4					052	60,07
6	10	17	5,2	18	54	6	0,15	4	060	57,42				
6	13	19	5,2	21	57	6	0,15	4			061	57,87		
6	18	21	7,2	26	62	6	0,15	4					062	64,15
8	12	20	7,6	22	58	8	0,15	4	080	65,14				
8	19	25	7,6	27	63	8	0,15	4			081	66,57		
8	24	27	9,6	32	68	8	0,15	4					082	72,30
10	14	24	8,8	26	66	10	0,15	4	100	103,20				
10	22	30	8,8	32	72	10	0,15	4			101	113,60		
10	30	33	12,0	40	80	10	0,15	4					102	129,00
12	16	26	10,4	28	73	12	0,15	4	120	136,80				
12	26	36	10,4	38	83	12	0,15	4			121	155,50		
12	36	39	14,4	48	93	12	0,15	4					122	176,30
14	18	28	10,4	30	75	14	0,15	4	140	164,20				
14	26	36	10,4	38	83	14	0,15	4			141	200,60		
14	42	45	16,8	54	99	14	0,15	4					142	241,40
16	22	32	12,8	34	82	16	0,15	4	160	200,60				
16	32	42	12,8	44	92	16	0,15	4			161	274,50		
16	48	51	19,2	60	108	16	0,15	4					162	331,80
18	24	34	12,8	36	84	18	0,15	4	180	253,60				
18	32	42	12,8	44	92	18	0,15	4			181	304,20		
18	54	57	21,6	66	114	18	0,15	4					182	384,60
20	26	42	15,2	42	92	20	0,15	4	200	346,10				
20	38	52	15,2	54	104	20	0,15	4			201	393,50		
20	60	63	24,0	76	126	20	0,15	4					202	493,80

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	○	○	○

→ v_c/f_z Page 350–355

14

End milling cutter with corner radius

▲ With graduated flute depth

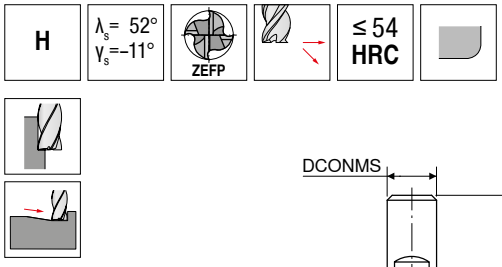

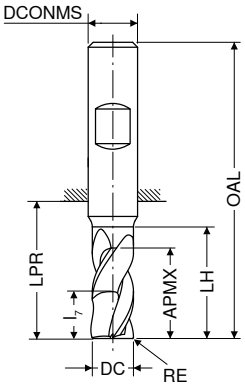

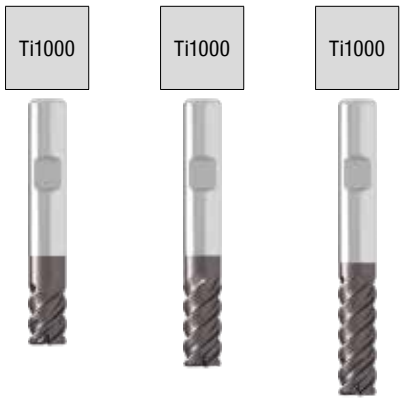



DC f8	RE ±0,01	APMX	LH	l7	LPR	OAL	DCONMS h5	ZEFP	V0 Article no. 50 908 ...		V0 Article no. 50 908 ...		V0 Article no. 50 908 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
4	0,5	8	15	4,4	18	54	6	4	60,29	040				
4	0,5	11	18	4,4	21	57	6	4			61,84	041		
4	0,5	16	19	6,4	26	62	6	4					70,97	042
5	0,5	9	16	4,8	18	54	6	4	60,29	050				
5	0,5	13	19	4,8	21	57	6	4			61,84	051		
5	0,5	17	20	6,8	26	62	6	4					70,97	052
6	0,5	10	17	5,2	18	54	6	4	61,71	060				
6	0,5	13	19	5,2	21	57	6	4			72,30	061		
6	0,5	18	21	7,2	26	62	6	4					74,94	062
8	1,0	12	20	7,6	22	58	8	4	69,33	080				
8	1,0	19	25	7,6	27	63	8	4			79,25	081		
8	1,0	24	27	9,6	32	68	8	4					81,22	082
10	1,0	14	24	8,8	26	66	10	4	115,80	100				
10	1,0	22	30	8,8	32	72	10	4			125,70	101		
10	1,0	30	33	12,0	40	80	10	4					136,80	102
12	1,5	16	26	10,4	28	73	12	4	155,50	120				
12	1,5	26	36	10,4	38	83	12	4			165,40	121		
12	1,5	36	39	14,4	48	93	12	4					177,50	122
14	1,5	18	28	10,4	30	75	14	4	215,00	140				
14	1,5	26	36	10,4	38	83	14	4			224,90	141		
14	1,5	42	45	16,8	54	99	14	4					260,10	142
16	2,0	22	32	12,8	34	82	16	4	295,40	160				
16	2,0	32	42	12,8	44	92	16	4			304,20	161		
16	2,0	48	51	19,2	60	108	16	4					329,60	162
18	2,0	24	34	12,8	36	84	18	4	306,40	180				
18	2,0	32	42	12,8	44	92	18	4			318,60	181		
18	2,0	54	57	21,6	66	114	18	4					382,40	182
20	2,0	26	40	15,2	42	92	20	4	435,30	200				
20	2,0	38	52	15,2	54	104	20	4			447,50	201		
20	2,0	60	63	24,0	76	126	20	4					521,40	202

Steel	●	●	●
Stainless steel			
Cast iron			
Non ferrous metals			
Heat resistant alloys			
hardened materials	○	○	○

→ v_c/f_z Page 350–355

Finish milling cutter

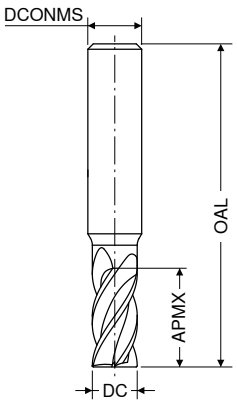

	DIN 6527	Factory standard
	HA	HA
	V0	V0
DC f8 mm	Article no. 50 635 ... EUR	Article no. 50 635 ... EUR
4	040 39,12	041 44,53
5	050 36,59	051 42,43
6	060 41,22	061 46,96
8	080 46,96	081 54,56
10	100 80,67	101 92,58
12	120 109,50	121 127,80
14	140 143,30	141 175,20
16	160 195,10	161 239,10 / 162 254,60
18	180 216,00	181 277,80
20	200 278,80	201 356,00 / 202 319,60 / 203 372,50
25	250 882,90	251 913,70
32	320 1.057,00	321 1.085,00

APMX mm	OAL mm	DCONMS h5 mm	ZEFP		
11	57	6	6	Steel	○ ○
16	62	6	6	Stainless steel	● ●
13	57	6	6	Cast iron	○ ○
18	62	6	6	Non ferrous metals	○ ○
13	57	6	6	Heat resistant alloys	● ●
18	62	6	6	hardened materials	● ●
19	63	8	6		
24	68	8	6		
22	72	10	6		
30	80	10	6		
26	83	12	6		
36	93	12	6		
26	83	14	6		
42	99	14	6		
32	92	16	8		
48	108	16	8		
90	150	16	8		
32	92	18	8		
54	114	18	8		
38	104	20	8		
60	126	20	8		
75	135	20	8		
95	150	20	8		
75	150	25	8		
95	160	25	8		
75	150	32	8		
95	160	32	8		

→ v_c/f_z Page 350–355

Finish milling cutter

H | λ_s=45° γ_s=16° | ZEFP | ≤ 50 HRC

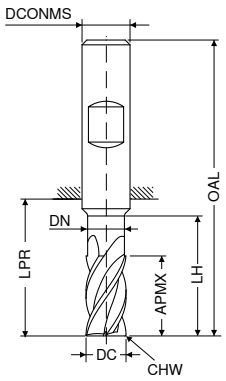

LPR with Shank DIN 6535 HB

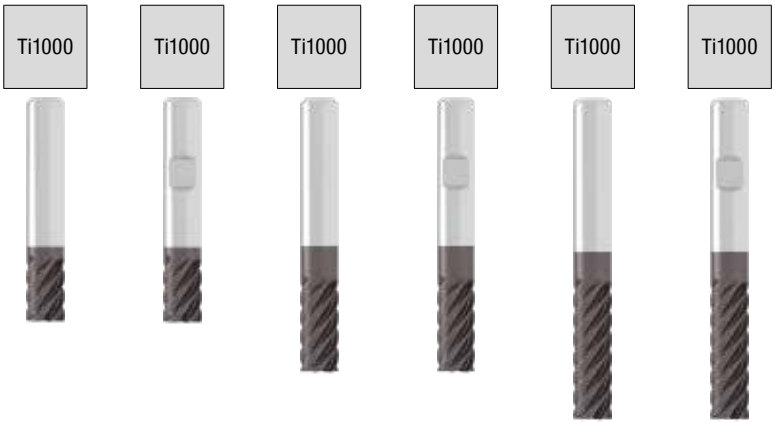

									Factory standard HA V1		Factory standard HB V1		Factory standard HA V1		Factory standard HB V1		Factory standard HA V1		Factory standard HB V1	
DC_{e8}	APMX	DN	LH	LPR	OAL	$DCONMS_{h6}$	CHW	ZEFP	Article no. 52 112 ...		Article no. 52 112 ...		Article no. 52 122 ...		Article no. 52 122 ...		Article no. 52 123 ...		Article no. 52 123 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
5	8	4,8	13	18	54	6	0,02	6	52,35	051	52,35	050								
5	13	4,8	18	22	58	6	0,02	6					55,00	051	55,00	050				
6	10	5,8	15	18	54	6	0,03	6	49,05	061	49,05	060								
6	16	5,8	20	22	58	6	0,03	6					53,79	061	53,79	060				
6	21			29	65	6	0,03	6									73,52	061	73,52	060
7	12	6,8	17	23	59	8	0,04	6	64,81	071	64,81	070								
7	22	6,8	30	34	70	8	0,04	6					68,34	071	68,34	070				
7	25			39	75	8	0,04	6									89,72	071	89,72	070
8	12	7,8	17	23	59	8	0,04	6	60,74	081	60,74	080								
8	22	7,8	32	34	70	8	0,04	6					67,24	081	67,24	080				
8	28			39	75	8	0,04	6									91,48	081	91,48	080
9	14	8,8	19	20	60	10	0,04	6	94,12	091	94,12	090								
9	25	8,8	33	33	73	10	0,04	6					104,80	091	104,80	090				
9	30			45	85	10	0,04	6									162,00	091	162,00	090
10	14	9,8	19	20	60	10	0,05	6	89,72	101	89,72	100								
10	25	9,8	33	33	73	10	0,05	6					104,00	101	104,00	100				
10	35			45	85	10	0,05	6									165,40	101	165,40	100
12	16	11,8	21	25	70	12	0,05	6	133,30	121	133,30	120								
12	28	11,8	38	39	84	12	0,05	6					140,00	121	140,00	120				
12	45			55	100	12	0,05	6									230,40	121	230,40	120
14	18	13,8	23	25	70	14	0,06	6	165,40	141	165,40	140								
14	30	13,8	38	39	84	14	0,06	6					196,30	141	196,30	140				
16	20	15,8	28	32	80	16	0,06	6	202,80	161	202,80	160								
16	35	15,8	43	45	93	16	0,06	6					231,50	161	231,50	160				
16	50			62	110	16	0,06	6									339,60	162	338,30	160
16	65			77	125	16	0,06	6									382,40	163	382,40	161
18	20	17,8	28	32	80	18	0,07	8	248,00	181	248,00	180								
18	35	17,8	43	45	93	18	0,07	8					280,00	181	280,00	180				
20	25	19,8	33	35	85	20	0,07	8	307,50	201	307,50	200								
20	40	19,8	45	50	100	20	0,07	8					343,80	201	343,80	200				
20	55			65	115	20	0,07	8									482,80	202	481,60	200
20	70			80	130	20	0,07	8									591,90	203	590,80	201
25	55	24,8	63	69	125	25	0,08	8					573,10	251	573,10	250				
25	75			94	150	25	0,08	8									943,50	251	943,50	250

Steel	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●
Cast iron	○	○	○	○	○	○
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys	●	●	●	●	●	●
hardened materials	○	○	○	○	○	○

→ v_c/f_z Page 350–355

Roughing-Finishing Cutter

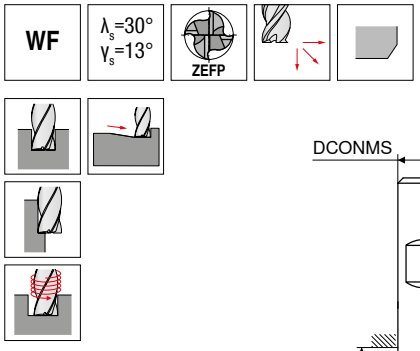

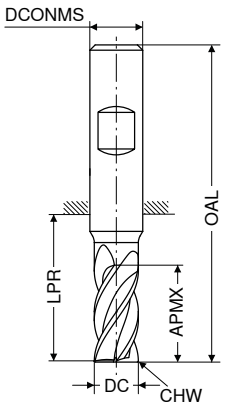

Ti400

DIN 6527

HB

V0

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 628 ... EUR	
5	15	21	57	6	0,25	4	77,15	050
6	16	21	57	6	0,25	4	77,15	060
8	22	27	63	8	0,25	4	96,11	080
10	25	32	72	10	0,25	4	103,40	100
12	28	38	83	12	0,25	4	127,80	120
16	35	44	92	16	0,25	4	198,30	160
20	40	54	104	20	0,25	4	298,80	200

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 350–353

Roughing-Finishing Cutter

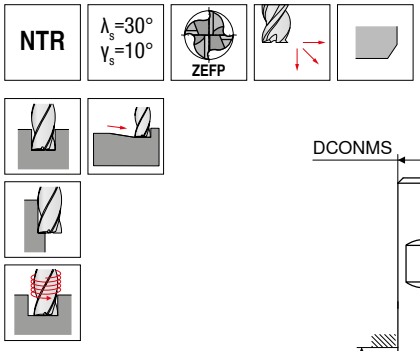

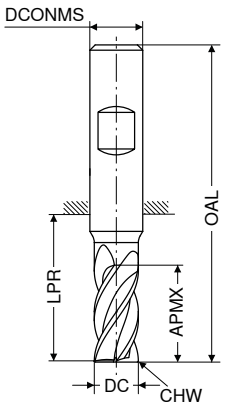

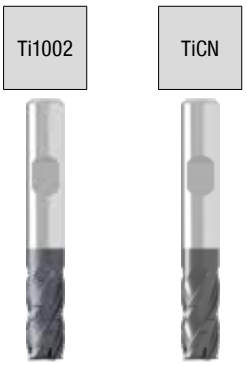



DIN 6527 | DIN 6527

HB | HB

V1 | V1

DC h10 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	Article no. 52 301 ... EUR		Article no. 52 300 ... EUR	
6	13	21	57	6		3	62,05	**060**	62,05	**060**
8	19	27	63	8	0,08	3	76,94	**080**	76,94	**080**
10	22	32	72	10	0,12	4	83,99	**100**	83,99	**100**
12	26	38	83	12	0,15	4	105,50	**120**	105,50	**120**
14	26	38	83	14	0,17	4	134,50	**140**	134,50	**140**
16	32	44	92	16	0,20	4	158,70	**160**	158,70	**160**
18	32	48	92	18	0,22	4	217,10	**180**	217,10	**180**
20	38	54	104	20	0,25	4	240,20	**200**	240,20	**200**

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	

→ v_c/f_z Page 350–353

Rough milling cutter with corner radius

WR | λ_s=45° γ_s= 9° | ZEFP | HPC



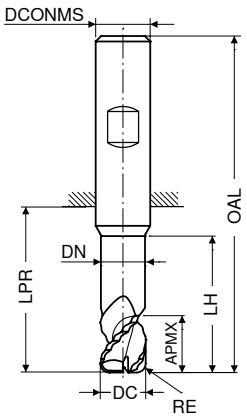

Factory standard | Factory standard

HA | HB

DC h6	RE +/-0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	V0 Article no. 54 625 ...		V0 Article no. 54 627 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
3		4,5	2,8	15	22	58	6	3	50,03	030	50,03	030
3		8,0	2,8	15	22	58	6	3	54,89	031	54,89	031
4		5,5	3,8	20	26	62	6	3	50,03	040	50,03	040
4		10,5	3,8	20	26	62	6	3	54,89	041	54,89	041
5		7,0	4,8	25	34	70	6	3	53,89	050	53,89	050
5		13,0	4,8	25	34	70	6	3	59,07	051	59,07	051
6	1	8,5	5,8	30	34	70	6	3	54,56	061	54,56	061
6	1	16,0	5,8	30	34	70	6	3	59,96	062	59,96	062
7	1	11,0	6,7	40	44	80	8	3	71,97	071	71,97	071
7	1	21,0	6,7	40	44	80	8	3	79,25	072	79,25	072
8	1	11,0	7,7	40	44	80	8	3	71,97	081	71,97	081
8	1	21,0	7,7	40	44	80	8	3	79,25	082	79,25	082
9	1	14,0	8,7	50	54	94	10	3	101,60	091	101,60	091
9	1	26,0	8,7	50	54	94	10	3	112,40	092	112,40	092
10	2	14,0	9,7	50	54	94	10	3	101,60	101	101,60	101
10	2	26,0	9,7	50	54	94	10	3	112,40	102	112,40	102
11	2	16,0	10,6	60	64	109	12	3	164,20	111	164,20	111
11	2	31,0	10,6	60	64	109	12	3	179,60	112	179,60	112
12	2	16,0	11,6	60	64	109	12	3	164,20	121	164,20	121
12	2	31,0	11,6	60	64	109	12	3	179,60	122	179,60	122
14	2	19,0	13,6	70	74	119	14	3	226,00	141	226,00	141
14	2	36,0	13,6	70	74	119	14	3	250,20	142	250,20	142
16	2	22,0	15,5	80	84	132	16	3	288,80	161	288,80	161
16	2	41,0	15,5	80	84	132	16	3	318,60	162	318,60	162
18	2	25,0	17,5	90	94	142	18	3	351,60	181	351,60	181
18	2	47,0	17,5	90	94	142	18	3	405,60	182	405,60	182
20	2	27,0	19,5	100	104	154	20	3	379,10	201	379,10	201
20	2	52,0	19,5	100	104	154	20	3	435,30	202	435,30	202

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

14

→ v_c/f_z Page 338+339

Rough milling cutter

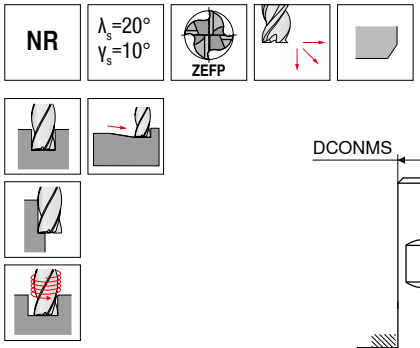

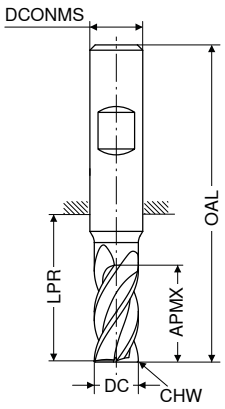

							DIN 6527 HB V0 Article no. 50 618 ...		DIN 6527 HB V0 Article no. 50 624 ...	
DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	EUR		EUR	
4	8	21	57	6	0,6	4			73,07	040
5	8	18	54	6	0,6	4	76,81	050		
5	13	21	57	6	0,6	4			73,07	050
6	8	18	54	6	0,6	4	68,66	060		
6	13	21	57	6	0,6	4			79,35	060
7	11	22	58	8	0,6	4	92,47	070		
7	19	27	63	8	0,6	4			90,49	070
8	11	22	58	8	0,6	4	83,99	080		
8	19	27	63	8	0,6	4			90,49	080
9	13	26	66	10	0,6	4	105,40	090		
9	22	32	72	10	0,6	4			105,00	090
10	13	26	66	10	0,6	4	105,40	100		
10	22	32	72	10	0,6	4			105,00	100
11	26	38	83	12	0,6	4			124,60	110
12	16	28	73	12	0,6	4	115,80	120		
12	26	38	83	12	0,6	4			124,60	120
13	26	38	83	14	0,6	4			175,20	130
14	16	31	76	14	0,6	4	159,90	140		
14	26	38	83	14	0,6	4			175,20	140
16	19	34	82	16	0,6	4	197,30	160		
16	32	44	92	16	0,6	4			197,30	160
18	19	36	84	18	0,6	4	237,00	180		
18	32	44	92	18	0,6	4			264,60	180
20	19	42	92	20	0,6	4	283,30	200		
20	38	54	104	20	0,6	4			294,30	200
25	45	65	121	25	0,6	5			360,40	250

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials		

→ v_c/f_z Page 350–353

Rough milling cutter

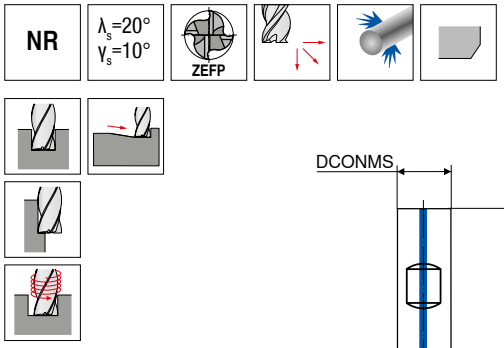

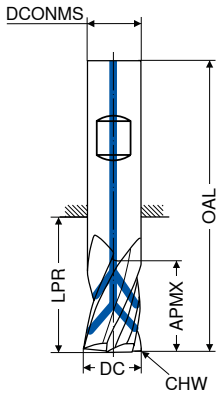

Ti400

DIN 6527

HB

V0

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 625 ...	
							EUR	
6	13	21	57	6	0,6	4	134,50	**060**
8	19	27	63	8	0,6	4	134,50	**080**
10	22	32	72	10	0,6	4	153,20	**100**
12	26	38	83	12	0,6	4	177,50	**120**
14	26	38	83	14	0,6	4	283,30	**140**
16	32	44	92	16	0,6	4	283,30	**160**
18	32	44	92	18	0,6	4	422,10	**180**
20	38	54	104	20	0,6	4	422,10	**200**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 350–353

14

Rough milling cutter

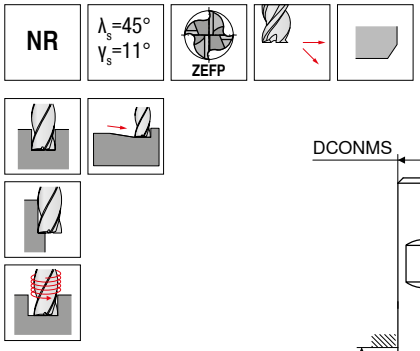

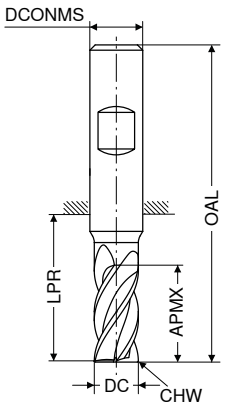

DIN 6527

HB

V0

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	Article no. 50 637 ... EUR	
6	13	21	57	6	0,5	4	83,65	**060**
8	19	27	63	8	0,5	4	95,89	**080**
10	22	32	72	10	0,5	4	104,70	**100**
12	26	38	83	12	0,5	4	124,60	**120**
14	26	38	83	14	0,5	4	175,20	**140**
16	32	44	92	16	0,5	5	197,30	**160**
18	32	44	92	18	0,5	5	265,60	**180**
20	38	54	104	20	0,5	6	295,40	**200**
25	45	65	121	25	0,5	6	363,80	**250**

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	●
hardened materials	

→ v_c/f_z Page 350–353

Rough milling cutter

▲ with integrated chip breakers in the flutes

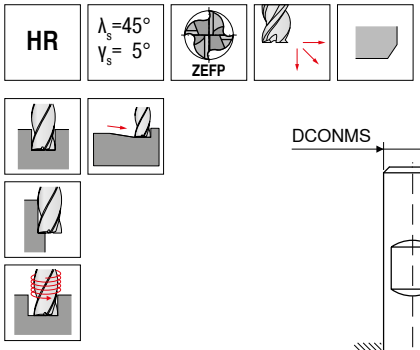

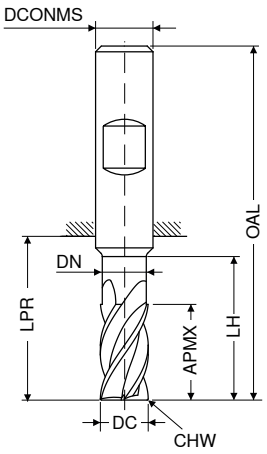

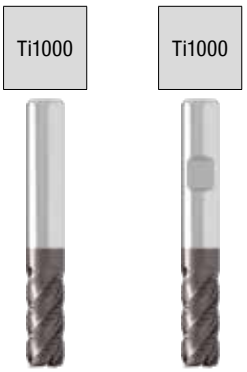

DC h11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Factory standard HA V1 Article no. 52 340 ...		Factory standard HB V1 Article no. 52 341 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR	
6	16	5,8	21	22	58	6	0,15	4	93,02	060	93,02	060
8	22	7,7	27	34	70	8	0,20	4	106,50	080	106,50	080
10	25	9,7	30	33	73	10	0,20	4	115,80	100	115,80	100
12	28	11,6	38	39	84	12	0,25	4	135,50	120	135,50	120
14	30	13,6	40	39	84	14	0,30	4	183,00	140	183,00	140
16	35	15,5	45	45	93	16	0,35	5	233,60	160	233,60	160
18	35	17,5	45	45	93	18	0,40	5	291,00	180	291,00	180
20	40	19,5	55	54	104	20	0,40	5	349,30	200	349,30	200
25	50	24,0	65	69	125	25	0,50	5	588,60	250	588,60	250

Steel	○	○
Stainless steel	●	●
Cast iron		
Non ferrous metals		
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 344+345

14

Rough milling cutter

▲ with integrated chip breakers in the flutes

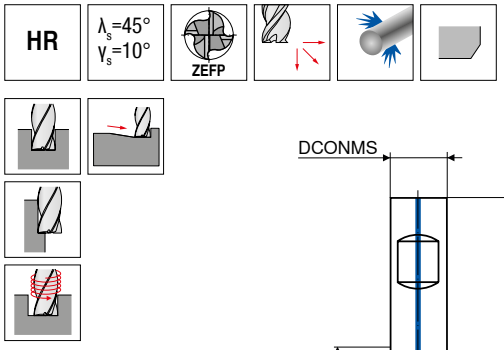

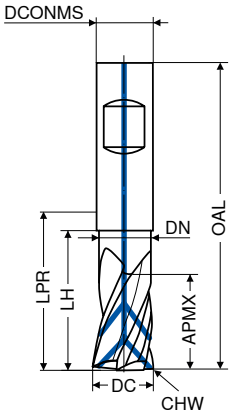

									Factory standard		Factory standard			
									HA		HB			
									V1		V1			
DC h11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	**Article no. 52 338 ...**		**Article no. 52 339 ...**			
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR			
6	16	5,8	21	22	58	6	0,15	4	115,80	**060**	115,80	**060**		
8	22	7,7	27	34	70	8	0,20	4	129,00	**080**	129,00	**080**		
10	25	9,7	30	33	73	10	0,20	4	151,00	**100**	151,00	**100**		
12	28	11,6	38	39	84	12	0,25	4	190,70	**120**	190,70	**120**		
14	30	13,6	40	39	84	14	0,25	4	251,30	**140**	251,30	**140**		
16	35	15,5	45	45	93	16	0,35	5	324,10	**160**	324,10	**160**		
18	35	17,5	45	45	93	18	0,35	5	380,30	**180**	380,30	**180**		
20	40	19,5	55	54	104	20	0,40	5	477,30	**200**	477,30	**200**		

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals		
Heat resistant alloys	○	○
hardened materials		

→ v_c/f_z Page 344+345

Rough milling cutter

▲ with integrated chip breakers in the flutes

HR

λ_s=45°
γ_s=10°



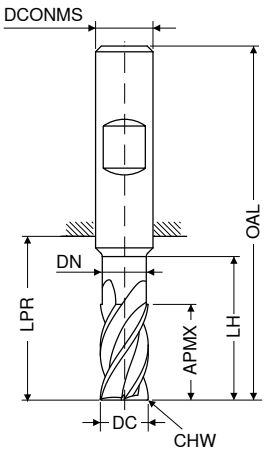

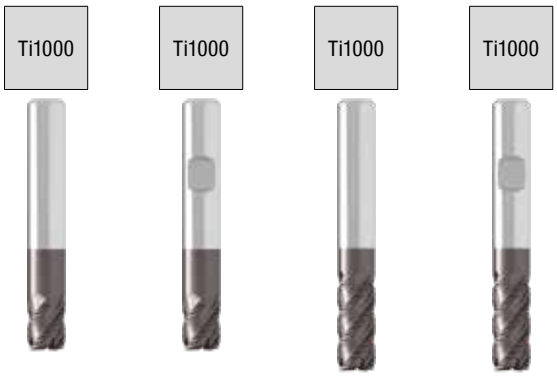



Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC h11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	Article no. 52 342 ...		Article no. 52 343 ...		Article no. 52 342 ...		Article no. 52 343 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
6	8	6,0		18	54	6	0,15	4	81,99	060	81,99	060				
6	16	5,8	21	22	58	6	0,15	4					90,93	061	90,93	061
8	11	8,0		23	59	8	0,20	4	94,12	080	94,12	080				
8	22	7,7	27	34	70	8	0,20	4					104,20	081	104,20	081
10	13	10,0		27	67	10	0,20	4	100,70	100	100,70	100				
10	25	9,7	30	33	73	10	0,20	4					112,40	101	112,40	101
12	16	12,0		29	74	12	0,25	4	116,80	120	116,80	120				
12	28	11,6	38	39	84	12	0,25	4					132,30	121	132,30	121
14	16	14,0		30	75	14	0,25	4	161,00	140	161,00	140				
14	30	13,5	40	39	84	14	0,25	4					177,50	141	177,50	141
16	19	16,0		36	84	16	0,35	5	200,60	160	200,60	160				
16	35	15,5	45	45	93	16	0,35	5					228,10	161	228,10	161
18	19	18,0		32	80	18	0,35	5	259,10	180	259,10	180				
18	35	17,5	45	45	93	18	0,35	5					282,20	181	282,20	181
20	19	20,0		43	93	20	0,40	5	307,50	200	307,50	200				
20	40	19,5	55	54	104	20	0,40	5					342,80	201	342,80	201
25	50	24,0	65	69	125	25	0,50	5					579,70	251	579,70	251

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals				
Heat resistant alloys	○	○	○	○
hardened materials				

→ v_c/f_z Page 344+345

14

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm
▲ For Ø DC ≤ 5.0 mm, angle tolerance α and β: ±0.5°

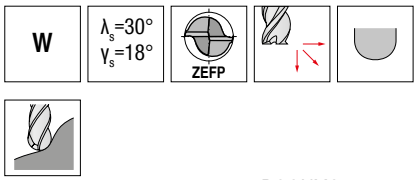

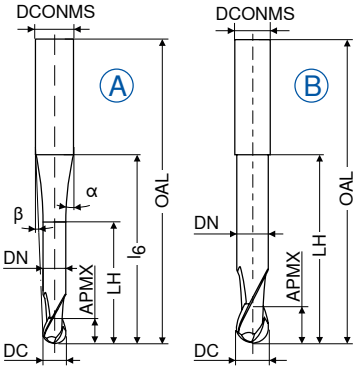

Factory standard
HA
V1
Article no. 52 718 ...

Factory standard
HA
V1
Article no. 52 720 ...

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	EUR		EUR	
0,5	1,0	0,45	2,0	9	38	10,0	8,0	3	2	A	123,50	**005**		
1,0	2,0	0,95	4,0	9	38	12,5	6,5	3	2	A	112,40	**010**		
1,5	2,5	1,40	7,5	9	38	32,0	5,0	3	2	A	99,53	**015**		
2,0	3,0	1,80	8,0	9	38	31,0	3,5	3	2	A	77,37	**020**		
3,0	3,5	2,80	10,0	20	57	11,5	5,0	6	2	A	74,29	**030**		
3,0	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A			91,59	**030**
4,0	4,0	3,80	12,0	20	57	11,0	3,5	6	2	A	72,52	**040**		
4,0	4,0	3,80	20,0	40	80	4,0	1,5	6	2	A			81,99	**040**
5,0	5,0	4,70	10,0	40	100	1,5	1,0	6	2	A			80,24	**050**
5,0	5,0	4,70	14,0	20	57	10,0	2,0	6	2	A	70,65	**050**		
6,0	6,0	5,60	20,0		57			6	2	B	64,81	**060**		
6,0	6,0	5,60	40,0		100			6	2	B			79,13	**060**
8,0	7,0	7,60	25,0		63			8	2	B	87,72	**080**		
8,0	7,0	7,60	60,0		120			8	2	B			102,40	**080**
10,0	8,0	9,60	30,0		72			10	2	B	138,80	**100**		
10,0	8,0	9,60	60,0		120			10	2	B			142,30	**100**
12,0	8,0	11,50	40,0		83			12	2	B	166,50	**120**		
12,0	10,0	11,50	70,0		160			12	2	B			220,50	**120**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys	○	○
hardened materials		

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

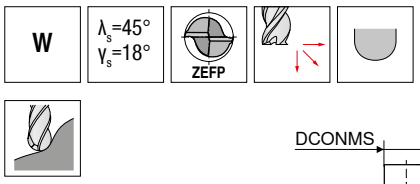

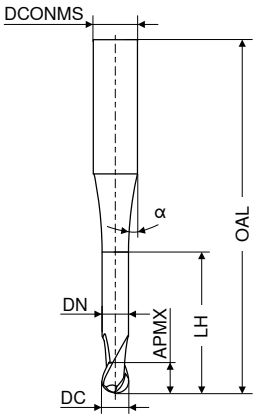

Factory standard | Factory standard

HA | HA

DC f8	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	V0 Article no. 50 903 ...		V0 Article no. 50 903 ...	
mm	mm	mm	mm	mm		mm		EUR		EUR	
0,2	0,2	0,18	0,6	55	15	3	2	75,39	021		
0,2	0,2	0,18	1,0	55	15	3	2	76,16	022		
0,2	0,2	0,18	1,6	55	15	3	2	76,81	023		
0,2	0,2	0,18	2,0	55	15	3	2	78,04	024		
0,3	0,3	0,28	0,9	55	15	3	2	75,39	031		
0,3	0,3	0,28	1,5	55	15	3	2	76,16	032		
0,3	0,3	0,28	2,4	55	15	3	2	76,81	033		
0,3	0,3	0,28	3,0	55	15	3	2	78,04	034		
0,4	0,4	0,37	1,2	55	15	3	2	75,39	041		
0,4	0,4	0,37	2,0	55	15	3	2	76,16	042		
0,4	0,4	0,37	3,2	55	15	3	2	76,81	043		
0,4	0,4	0,37	4,0	55	15	3	2	78,04	044		
0,5	0,5	0,45	1,5	55	15	3	2	73,74	051		
0,5	0,5	0,45	2,5	55	15	3	2	74,39	052		
0,5	0,5	0,45	4,0	55	15	3	2	75,39	053		
0,5	0,5	0,45	5,0	55	15	3	2	76,16	054		
0,6	0,6	0,58	2,0	55	15	3	2	63,48	061		
0,6	0,6	0,58	3,0	55	15	3	2	61,71	062		
0,6	0,6	0,58	5,0	65	15	3	2			67,34	063
0,6	0,6	0,58	6,0	65	15	3	2			71,42	064
0,8	0,8	0,77	2,5	55	15	3	2	61,71	081		
0,8	0,8	0,77	4,0	55	15	3	2	61,71	082		
0,8	0,8	0,77	6,5	65	15	3	2			68,66	083
0,8	0,8	0,77	8,0	65	15	3	2			71,42	084
1,0	1,0	0,95	3,0	55	15	3	2	61,71	101		
1,0	1,0	0,95	5,0	55	15	3	2	61,71	102		
1,0	1,0	0,95	8,0	65	15	3	2			65,24	103
1,0	1,0	0,95	10,0	65	15	3	2			71,42	104
1,0	1,0	0,95	12,0	65	15	3	2			73,07	105
1,2	1,2	1,15	3,0	55	15	3	2	61,71	121		
1,2	1,2	1,15	6,0	55	15	3	2	61,71	122		
1,2	1,2	1,15	10,0	65	15	3	2			68,66	123
1,2	1,2	1,15	12,0	65	15	3	2			71,42	124
1,3	1,3	1,25	4,0	55	15	3	2	61,71	131		
1,3	1,3	1,25	7,0	55	15	3	2	61,71	132		
1,3	1,3	1,25	11,0	65	15	3	2			68,66	133
1,3	1,3	1,25	13,0	65	15	3	2			71,42	134
1,5	1,5	1,44	5,0	55	15	3	2	63,48	151		
1,5	1,5	1,44	7,5	55	15	3	2	61,71	152		
1,5	1,5	1,44	12,0	65	15	3	2			71,42	154

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 350–356

14

Continued on next page

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

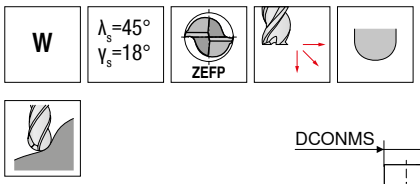

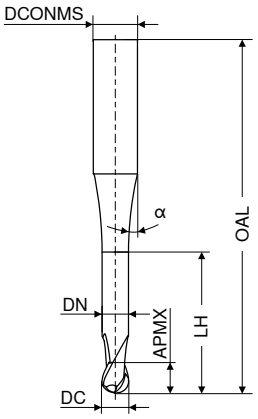

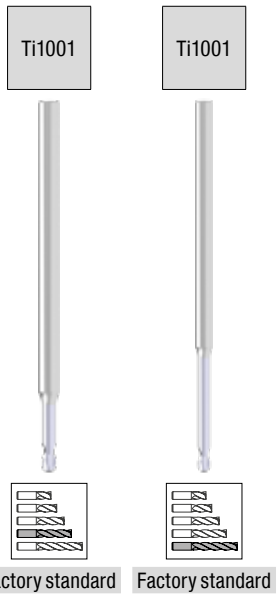

Factory standard | Factory standard

HA | HA

DC f8	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	V0 Article no. 50 903 ...		V0 Article no. 50 903 ...	
mm	mm	mm	mm	mm		mm		EUR		EUR	
1,5	1,5	1,44	15,0	65	15	3	2			73,07	153
1,6	1,6	1,52	5,0	55	15	3	2	63,48	161		
1,6	1,6	1,52	8,0	55	15	3	2	63,48	162		
1,6	1,6	1,52	13,0	65	15	3	2			68,66	163
1,6	1,6	1,52	16,0	65	15	3	2			73,07	164
1,8	1,8	1,72	5,5	55	15	3	2	61,71	181		
1,8	1,8	1,72	9,0	55	15	3	2	63,48	182		
1,8	1,8	1,72	14,5	65	15	3	2			68,66	183
1,8	1,8	1,72	18,0	65	15	3	2			73,07	184
2,0	2,0	1,92	6,0	55	15	3	2	61,71	201		
2,0	2,0	1,92	10,0	55	15	3	2	61,71	202		
2,0	2,0	1,92	14,0	55	15	3	2	65,24	203		
2,0	2,0	1,92	16,0	65	15	3	2			73,07	204
2,0	2,0	1,92	20,0	65	15	3	2			71,42	205
2,3	2,3	2,22	7,0	55	15	3	2	61,71	231		
2,3	2,3	2,22	11,5	55	15	3	2	61,71	232		
2,3	2,3	2,22	18,5	65	15	3	2			65,24	233
2,3	2,3	2,22	20,0	65	15	3	2			71,42	234
2,3	2,3	2,22	23,0	65	15	3	2			73,07	235
3,0	3,0	2,90	9,0	65	15	6	2	65,24	301		
3,0	3,0	2,90	15,0	65	15	6	2	73,07	302		
3,0	3,0	2,90	24,0	100	15	6	2			79,25	303
3,0	3,0	2,90	30,0	100	15	6	2			82,67	304
4,0	4,0	3,90	12,0	65	15	6	2	73,07	401		
4,0	4,0	3,90	20,0	65	15	6	2	73,07	402		
4,0	4,0	3,90	32,0	100	15	6	2			82,67	403
4,0	4,0	3,90	40,0	100	15	6	2			85,09	404
5,0	5,0	4,90	15,0	65	15	6	2	73,07	501		
5,0	5,0	4,90	25,0	65	15	6	2	73,07	502		
5,0	5,0	4,90	40,0	100	15	6	2			85,09	503
5,0	5,0	4,90	50,0	100	15	6	2			89,39	504
6,0	6,0	5,90	18,0	65	15	6	2	73,07	601		
6,0	6,0	5,90	30,0	100	15	6	2			82,67	602
6,0	6,0	5,90	48,0	100	15	6	2			89,39	603
6,0	6,0	5,90	60,0	100	15	6	2			92,14	604

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

W | λ_s=55° γ_s= 7° | ZEFP | HPC

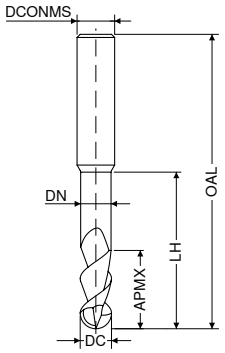



Factory standard | Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA | HA | HA

V0 | V0 | V0 | V0 | V0 | V0

DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Article no. 54 640 ...		Article no. 54 642 ...		Article no. 54 640 ...		Article no. 54 642 ...		Article no. 54 640 ...		Article no. 54 642 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR		EUR		EUR	
3	5,0	2,8	12	55	6	2	59,84	031	72,30	031								
3	3,5	2,8	15	58	6	2					65,24	034	79,02	034				
3	8,0	2,8	15	58	6	2					68,56	032	82,89	032				
3	3,5	2,8	24	67	6	2									79,80	035	94,67	035
4	6,5	3,8	12	55	6	2	59,84	041	72,30	041								
4	10,5	3,8	20	62	6	2					68,56	042	93,13	042				
4	4,5	3,8	20	62	6	2					65,24	044	79,02	044				
4	4,5	3,8	32	74	6	2									79,80	045	94,67	045
5	8,0	4,8	15	58	6	2	59,84	051	72,30	051								
5	13,0	4,8	25	70	6	2					68,56	052	82,89	052				
5	5,5	4,8	25	70	6	2					65,24	054	79,02	054				
5	5,5	4,8	40	88	6	2									79,80	055	94,67	055
6	10,0	5,8	18	58	6	2	59,84	061	72,30	061								
6	16,0	5,8	30	70	6	2					68,56	062	82,89	062				
6	7,0	5,8	30	70	6	2					65,24	064	79,02	064				
6	7,0	5,8	48	88	6	2									78,47	065	94,67	065
8	13,0	7,7	24	64	8	2	78,25	081	92,36	081								
8	21,0	7,7	40	80	8	2					89,27	082	106,00	082				
8	9,0	7,7	40	80	8	2					85,09	084	100,90	084				
8	9,0	7,7	64	104	8	2									102,60	085	122,30	085
10	16,0	9,7	30	74	10	2	105,00	101	122,30	101								
10	26,0	9,7	50	94	10	2					121,30	102	143,30	102				
10	11,0	9,7	50	94	10	2					114,60	104	131,30	104				
10	11,0	9,7	80	124	10	2									137,80	105	157,60	105
12	19,0	11,6	36	85	12	2	147,80	121	162,00	121								
12	31,0	11,6	60	109	12	2					199,50	122	223,80	122				
12	13,0	11,6	60	109	12	2					192,80	124	213,80	124				
12	13,0	11,6	96	145	12	2									265,60	125	293,20	125
14	22,0	13,6	42	91	14	2	183,00	141	200,60	141								
14	36,0	13,6	70	119	14	2					251,30	142	275,60	142				
14	15,0	13,6	70	119	14	2					239,10	144	264,60	144				
14	15,0	13,6	112	161	14	2									345,10	145	378,00	145
16	25,0	15,5	48	100	16	2	240,20	161	260,10	161								
16	41,0	15,5	80	132	16	2					329,60	162	358,30	162				
16	17,0	15,5	80	132	16	2					315,20	164	339,60	164				
16	17,0	15,5	128	180	16	2									470,60	165	511,40	165
18	29,0	17,5	54	106	18	2	335,10	181	356,00	181								
18	47,0	17,5	90	142	18	2					459,60	182	488,30	182				
18	20,0	17,5	90	142	18	2					438,70	184	465,10	184				
18	20,0	17,5	144	196	18	2									657,90	185	695,50	185
20	32,0	19,5	60	114	20	2	337,30	201	363,80	201								
20	52,0	19,5	100	154	20	2					465,10	202	497,10	202				
20	22,0	19,5	100	154	20	2					445,30	204	473,90	204				
20	22,0	19,5	160	214	20	2									663,40	205	712,00	205

Steel						
Stainless steel						
Cast iron						
Non ferrous metals	●	●	●	●	●	●
Heat resistant alloys						
hardened materials						

→ v_c/f_z Page 338+339

14

Ball nosed cutter

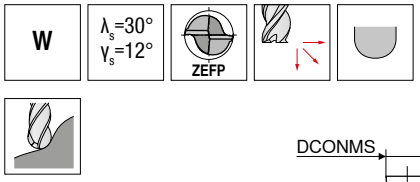

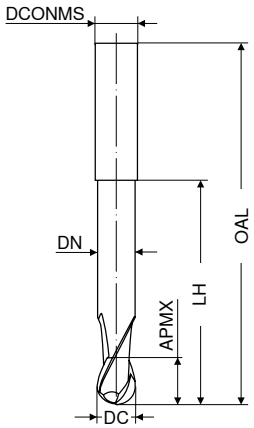

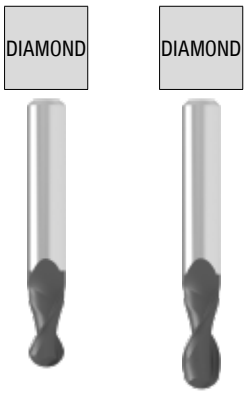



Factory standard | Factory standard

HA | HA

DC h10	APMX	LH	DN	OAL	DCONMS h6	ZEFP	V1 Article no. 52 766 ...		V1 Article no. 52 768 ...	
mm	mm	mm	mm	mm	mm		EUR		EUR	
0,5	1,5			38	3	2	116,80	**005**		
1,0	2,0			38	3	2	113,60	**010**		
2,0	3,0			38	3	2	113,60	**020**		
2,0	3,0			50	6	2	174,10	**021**		
2,0	8,0	31	1,8	60	2	2			135,50	**020**
3,0	5,0			38	3	2	113,60	**030**		
3,0	5,0			50	6	2	174,10	**031**		
3,0	12,0	41	2,8	70	3	2			129,00	**030**
4,0	8,0			54	6	2	174,10	**040**		
4,0	15,0	51	3,8	80	4	2			180,80	**040**
5,0	9,0			54	6	2	174,10	**050**		
5,0	20,0	71	4,8	100	5	2			208,30	**050**
6,0	10,0			54	6	2	168,60	**060**		
6,0	20,0	63	5,8	100	6	2			233,60	**060**
8,0	12,0			58	8	2	234,80	**080**		
8,0	20,0	83	7,8	120	8	2			308,60	**080**
10,0	14,0			66	10	2	297,50	**100**		
10,0	25,0	99	9,8	140	10	2			397,90	**100**
12,0	25,0	104	11,8	150	12	2			524,60	**120**

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 348

Micro-ball nosed cutter

▲ Radius accuracy: ±0.01 mm

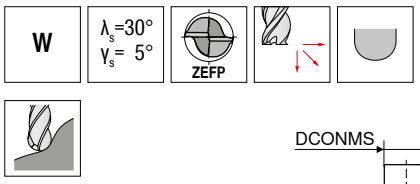

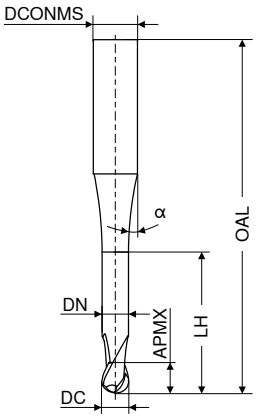

Factory standard | Factory standard

HA | HA

V0 | V0

DC f8 mm	APMX mm	LH mm	DN mm	OAL mm	α°	DCONMS h5 mm	ZEFP	Article no. 50 912 ...	EUR		Article no. 50 912 ...	EUR	
0,6	1,2	3,0	0,58	55	15	6	2		138,80	906			
0,6	1,2	6,0	0,58	65	15	6	2					152,10	006
0,8	1,2	4,0	0,77	55	15	6	2		138,80	908			
0,8	1,2	8,0	0,77	65	15	6	2					152,10	008
1,0	1,5	5,0	0,95	55	15	6	2		138,80	910			
1,0	1,5	12,0	0,95	65	15	6	2					152,10	010
1,2	1,6	6,0	1,15	55	15	6	2		138,80	912			
1,2	1,6	12,0	1,15	65	15	6	2					152,10	012
1,5	1,8	7,5	1,44	55	15	6	2		138,80	915			
1,5	1,8	15,0	1,44	65	15	6	2					152,10	015
2,0	2,0	10,0	1,92	55	15	6	2		138,80	920			
2,0	2,0	20,0	1,92	65	15	6	2					152,10	020

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 348

14

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

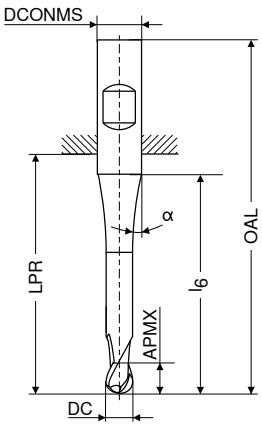

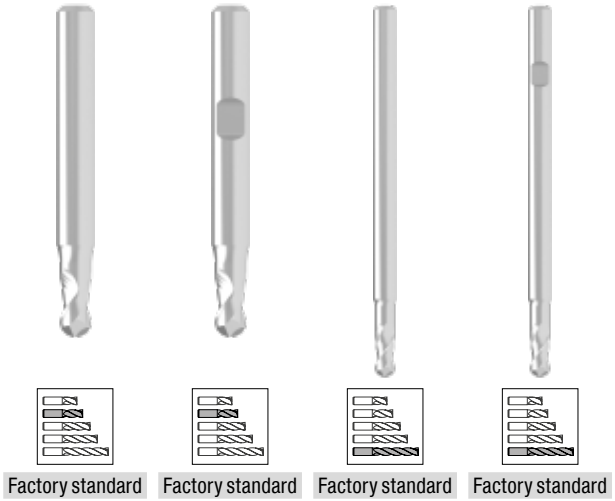

DC f8	APMX	l6	LPR	OAL	α° ±0,5	DCONMS h6	ZEFP	Factory standard HA V1 Article no. 52 250 ...		Factory standard HB V1 Article no. 52 250 ...		Factory standard HA V1 Article no. 52 251 ...		Factory standard HB V1 Article no. 52 251 ...	
mm	mm	mm	mm	mm		mm		EUR		EUR		EUR		EUR	
0,10	0,2	12,5	10	38	8	3	2	81,89	910						
0,15	0,3	11,5	10	38	8	3	2	71,09	915						
0,20	0,4	12,0	10	38	8	3	2	65,36	920						
0,25	0,5	12,5	10	38	8	3	2	63,04	925						
0,30	1,0	11,0	10	38	8	3	2	58,42	930						
0,35	1,0	11,0	10	38	8	3	2	51,69	935						
0,40	1,0	11,0	10	38	8	3	2	37,59	940						
0,50	1,5	11,5	10	38	8	3	2	29,98	950						
0,50	1,5	15,5	18	54	12	6	2	35,93	951						
0,50	1,5	11,5	47	75	8	3	2					41,43	005		
0,50	1,5	16,0	44	80	12	6	2					47,94	006		
0,60	1,5	11,5	10	38	8	3	2	32,96	960						
0,70	2,0	11,5	10	38	8	3	2	29,98	970						
0,80	2,0	11,5	10	38	8	3	2	29,98	980						
0,90	2,5	12,0	10	38	8	3	2	29,98	990						
1,00	2,0	11,0	22	50	8	3	2	30,97	011						
1,00	2,0	16,0	18	54	12	6	2	34,38	106	33,18	010				
1,00	3,0	12,0	47	75	8	3	2					45,64	010		
1,00	3,0	17,5	44	80	12	6	2					51,80	011	51,80	610
1,10	3,0	13,0	22	50	8	3	2	29,98	911						
1,20	3,0	13,0	22	50	8	3	2	29,98	012						
1,40	3,0	13,0	22	50	8	3	2	29,98	014						
1,50	3,0	11,0	22	50	8	3	2	29,98	016						
1,50	3,0	16,5	18	54	12	6	2	34,38	156	33,18	015				
1,50	4,0	13,0	47	75	8	3	2					45,19	015		
1,50	4,0	16,5	44	80	12	6	2					51,80	016	51,80	615
1,60	4,0	10,5	22	50	8	3	2	29,98	916						
1,80	4,0	10,0	22	50	8	3	2	29,98	018						
2,00	4,0	10,0	22	50	8	3	2	30,97	021						
2,00	4,0	16,5	18	54	12	6	2	34,38	206	33,18	020				
2,00	6,0	12,5	47	75	8	3	2					42,33	020		
2,00	6,0	18,0	44	80	12	6	2					50,59	021	50,59	620
2,50	5,0	10,5	22	50	8	3	2	29,98	025						
2,50	5,0	16,0	18	54	12	6	2	33,18	026	33,18	027				
2,50	8,0	14,0	47	75	8	3	2					41,33	025		
2,50	8,0	18,5	44	80	12	6	2					50,92	026	50,92	625
3,00	6,0		22	50		3	2	30,97	031						
3,00	6,0	15,5	18	54	12	6	2	34,38	306	33,18	030				
3,00	10,0		47	75		3	2					40,66	030		
3,00	10,0	19,5	44	80	12	6	2					49,48	031	49,48	630
4,00	7,0	16,0	18	54	12	6	2	34,38	406	33,18	040				

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials				

→ v_c/f_z Page 350–356

Continued on next page

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

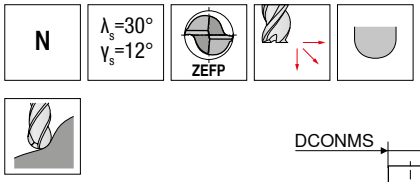

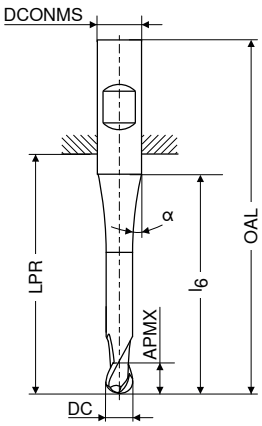

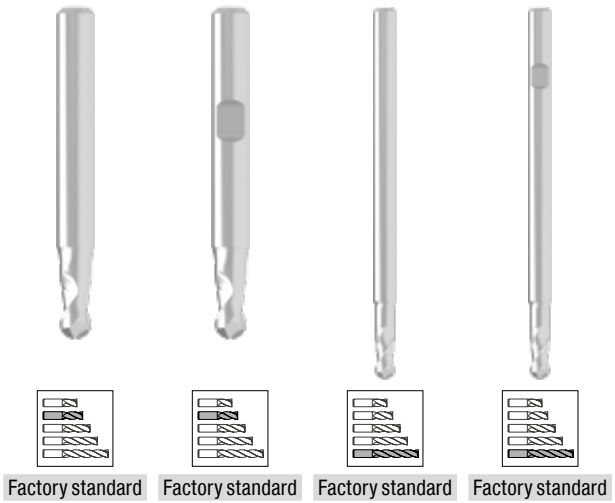

DC f8	APMX	l6	LPR	OAL	α° ±0,5	DCONMS h6	ZEFP	Factory standard HA V1 Article no. 52 250 ...		Factory standard HB V1 Article no. 52 250 ...		Factory standard HA V1 Article no. 52 251 ...		Factory standard HB V1 Article no. 52 251 ...	
mm	mm	mm	mm	mm		mm		EUR		EUR		EUR		EUR	
4,00	7,0		26	54		4	2	31,52	041						
4,00	13,0		47	75		4	2					38,46	040		
4,00	13,0	20,5	44	80	12	6	2					49,48	041	49,48	640
5,00	8,0	13,0	18	54	12	6	2	34,38	506	33,18	050				
5,00	8,0		26	54		5	2	33,18	051						
5,00	14,0		47	75		5	2					43,20	050		
5,00	14,0	20,5	64	100	12	6	2					49,48	051	49,48	650
6,00	10,0		18	54		6	2	33,18	061	33,18	060				
6,00	16,0		64	100		6	2					46,84	061	46,84	060
8,00	12,0		23	59		8	2	38,46	081	38,46	080				
8,00	22,0		64	100		8	2					54,78	081	54,78	080
10,00	13,0		27	67		10	2	49,71	101	49,71	100				
10,00	25,0		60	100		10	2					73,52	101	73,52	100
12,00	16,0		28	73		12	2	71,65	121	71,65	120				
12,00	26,0		55	100		12	2					97,98	121	97,98	120
14,00	16,0		30	75		14	2	92,80	141	92,80	140				
14,00	26,0		55	100		14	2					138,80	141	138,80	140
16,00	20,0		35	83		16	2	103,40	161	103,40	160				
16,00	30,0		102	150		16	2					224,90	161	224,90	160
20,00	25,0		43	93		20	2	179,60	201	179,60	200				
20,00	40,0		100	150		20	2					271,10	201	271,10	200

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials				

→ v_c/f_z Page 350–356

14

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

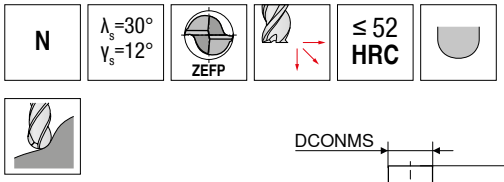

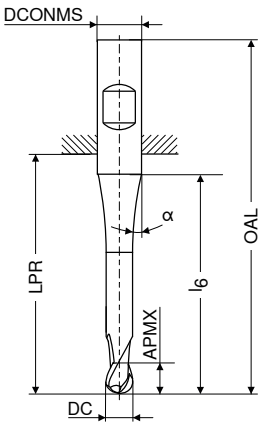

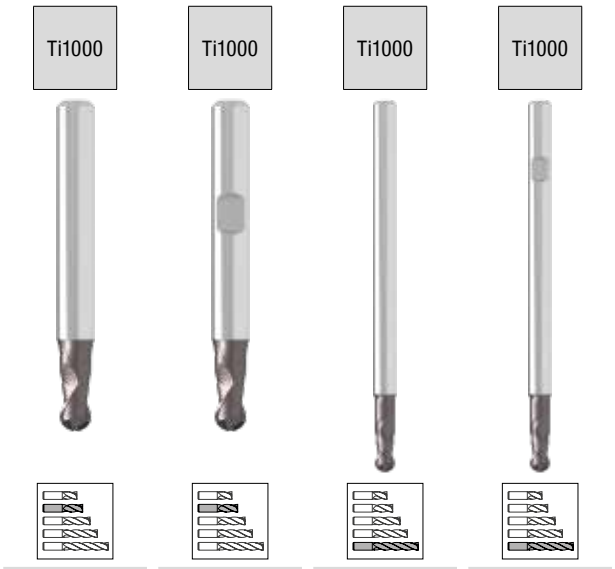

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

DC f8 mm	APMX mm	l6 mm	LPR mm	OAL mm	α° ±0,5°	DCONMS h6 mm	ZEFP	V1 Article no. 52 254 ...	EUR		V1 Article no. 52 254 ...	EUR		V1 Article no. 52 255 ...	EUR		V1 Article no. 52 255 ...	EUR	
0,10	0,2	12,5	10	38	8	3	2		86,07	910									
0,15	0,3	11,5	10	38	8	3	2		75,49	915									
0,20	0,4	12,0	10	38	8	3	2		71,65	920									
0,25	0,5	12,5	10	38	8	3	2		83,10	925									
0,30	1,0	11,0	10	38	8	3	2		77,37	930									
0,35	1,0	11,0	10	38	8	3	2		69,21	935									
0,40	1,0	11,0	10	38	8	3	2		51,58	940									
0,50	1,5	15,5	18	54	12	6	2		44,53	951									
0,50	1,5	16,0	44	80	12	6	2							72,42	006				
0,50	1,5	11,5	10	38	8	3	2		42,54	950									
0,50	1,5	11,5	47	75	8	3	2							48,28	005				
0,60	1,5	11,5	10	38	8	3	2		45,74	960									
0,70	2,0	11,5	10	38	8	3	2		42,54	970									
0,80	2,0	11,5	10	38	8	3	2		42,54	980									
0,90	2,5	12,0	10	38	8	3	2		42,54	990									
1,00	2,0	11,0	22	50	8	3	2		45,30	011									
1,00	2,0	16,0	18	54	12	6	2		49,82	106	49,82	010							
1,00	3,0	12,0	47	75	8	3	2							64,37	010				
1,00	3,0	17,5	44	80	12	6	2							77,15	011	77,15	610		
1,10	3,0	13,0	22	50	8	3	2		42,54	911									
1,20	3,0	13,0	22	50	8	3	2		42,54	012									
1,40	3,0	13,0	22	50	8	3	2		42,54	014									
1,50	3,0	11,0	22	50	8	3	2		45,30	016									
1,50	3,0	16,5	18	54	12	6	2		45,30	156	49,82	015							
1,50	4,0	13,0	47	75	8	3	2							63,92	015				
1,50	4,0	16,5	44	80	12	6	2							77,15	016	77,15	615		
1,60	4,0	10,5	22	50	8	3	2		42,54	916									
1,80	4,0	10,0	22	50	8	3	2		42,54	018									
2,00	4,0	16,5	18	54	12	6	2		49,82	206	49,82	020							
2,00	4,0	10,0	22	50	8	3	2		45,30	021									
2,00	6,0	12,5	47	75	8	3	2							60,07	020				
2,00	6,0	18,0	44	80	12	6	2							75,39	021	75,39	620		
2,50	5,0	16,0	18	54	12	6	2		52,35	026	52,35	027							
2,50	5,0	10,5	22	50	8	3	2		42,54	025									
2,50	8,0	14,0	47	75	8	3	2							58,97	025				
2,50	8,0	18,5	44	80	12	6	2							76,16	026	76,16	625		
3,00	6,0	15,5	18	54	12	6	2		49,82	306	49,82	030							
3,00	6,0		22	50		3	2		45,30	031									
3,00	10,0		47	75		3	2							58,08	030				
3,00	10,0	19,5	44	80	12	6	2							74,17	031	74,17	630		

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–356

Continued on next page

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

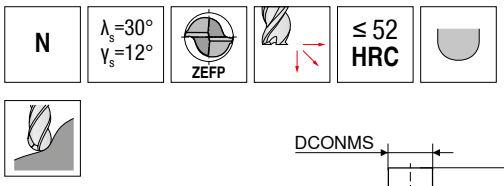

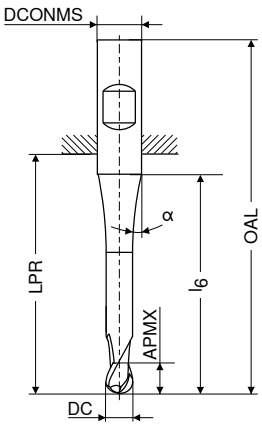

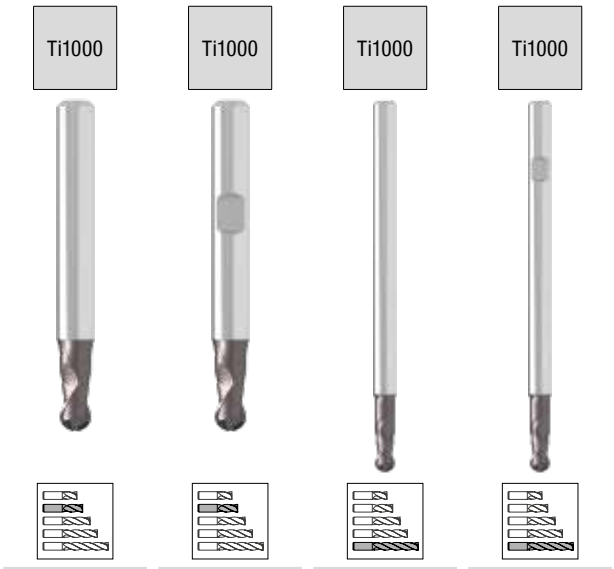

								Factory standard		Factory standard		Factory standard		Factory standard	
								HA		HB		HA		HB	
								V1		V1		V1		V1	
DC f8	APMX	l6	LPR	OAL	α° ±0,5°	DCONMS h6	ZEFP	Article no. 52 254 ...		Article no. 52 254 ...		Article no. 52 255 ...		Article no. 52 255 ...	
mm	mm	mm	mm	mm		mm		EUR		EUR		EUR		EUR	
4,00	7,0	13,0	18	54	12	6	2	49,82	406	49,82	040				
4,00	7,0		26	54		4	2	47,83	041						
4,00	13,0		47	75		4	2					55,66	040		
4,00	13,0	20,5	44	80	12	6	2					74,17	041	74,17	640
5,00	8,0	13,0	18	54	12	6	2	49,82	506	49,82	050				
5,00	8,0		26	54		5	2	49,82	051						
5,00	14,0		47	75		5	2					63,26	050		
5,00	14,0	20,5	64	100	12	6	2					74,17	051	74,17	650
6,00	10,0		18	54		6	2	49,82	061	49,82	060				
6,00	16,0		64	100		6	2					74,51	061	74,51	060
8,00	12,0		23	59		8	2	60,62	081	60,62	080				
8,00	22,0		64	100		8	2					89,60	081	89,60	080
10,00	13,0		27	67		10	2	79,80	101	79,80	100				
10,00	25,0		60	100		10	2					117,90	101	117,90	100
12,00	16,0		28	73		12	2	113,60	121	113,60	120				
12,00	26,0		55	100		12	2					155,50	121	155,50	120
14,00	16,0		30	75		14	2	144,40	141	144,40	140				
14,00	26,0		55	100		14	2					208,30	141	208,30	140
16,00	20,0		35	83		16	2	165,40	161	165,40	160				
16,00	30,0		102	150		16	2					342,80	161	342,80	160
18,00	22,0		43	93		18	2	224,90	181	224,90	180				
20,00	25,0		43	93		20	2	271,10	201	271,10	200				
20,00	40,0		100	150		20	2					418,80	201	418,80	200

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ± 0.005 mm
▲ For Ø DC ≤ 5.0 mm, angle tolerance α and β: ±0.5°

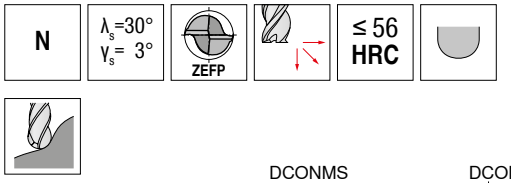

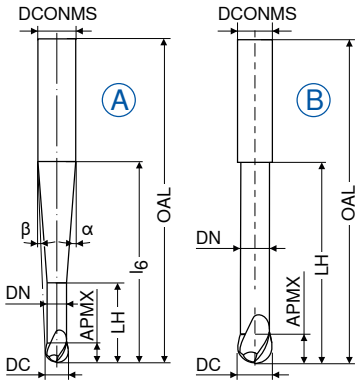

Factory standard

Factory standard

V1

V1

DC ±0,01	APMX	DN	LH	l6	OAL	α°	β°	DCONMS h5	ZEFP	Fig.	Article no. 52 714 ...		Article no. 52 717 ...	
mm	mm	mm	mm	mm	mm			mm			EUR		EUR	
0,5	1,0	0,45	2,0	20	57	10,0	8,5	6	2	A	121,30	**005**		
1,0	2,0	0,95	4,0	20	57	10,0	8,0	6	2	A	123,50	**010**		
1,0	2,0	0,95	4,0	40	80	4,5	4,0	6	2	A			112,40	**010**
1,5	2,5	1,40	7,5	20	57	12,5	7,0	6	2	A	110,20	**015**		
1,5	2,5	1,40	7,5	40	80	4,5	3,5	6	2	A			101,90	**015**
2,0	3,0	1,80	8,0	20	57	12,0	6,5	6	2	A	88,17	**020**		
2,0	3,0	1,80	8,0	40	80	4,0	3,0	6	2	A			90,93	**020**
3,0	3,5	2,80	10,0	20	57	11,5	5,0	6	2	A	84,75	**030**		
3,0	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A			87,84	**030**
4,0	4,0	3,80	12,0	20	57	11,0	3,5	6	2	A	83,21	**040**		
4,0	4,0	3,80	20,0	40	80	4,0	1,5	6	2	A			81,89	**040**
5,0	5,0	4,70	14,0	20	57	10,0	2,0	6	2	A	81,44	**050**		
5,0	5,0	4,70	25,0	40	80	3,0	1,0	6	2	A			83,21	**050**
6,0	6,0	5,60	20,0		57			6	2	B	76,49	**060**		
6,0	6,0	5,60	40,0		80			6	2	B			87,52	**060**
6,0	6,0	5,60	25,0	60	100	2,0	1,0	8	2	A			119,10	**061**
8,0	7,0	7,60	25,0		63			8	2	B	106,80	**080**		
8,0	7,0	7,60	60,0		100			8	2	B			117,90	**080**
8,0	7,0	7,60	30,0	75	120	2,0	1,0	10	2	A			158,70	**081**
10,0	8,0	9,60	30,0		72			10	2	B	145,50	**100**		
10,0	8,0	9,60	50,0		100			10	2	B			121,30	**102**
10,0	8,0	9,60	75,0		120			10	2	B			142,30	**100**
10,0	8,0	9,60	40,0	110	160	1,0	1,0	12	2	A			216,00	**101**
12,0	10,0	11,50	35,0		83			12	2	B	191,80	**120**		
12,0	10,0	11,50	35,0	40	92	35,0	3,5	16	2	A	267,80	**121**		
12,0	10,0	11,50	70,0		120			12	2	B			195,10	**122**
12,0	10,0	11,50	70,0		160			12	2	B			233,60	**120**
12,0	10,0	11,50	50,0	150	200	1,5	1,0	16	2	A			424,30	**121**
16,0	12,0	15,50	40,0		92			16	2	B	262,30	**160**		
16,0	12,0	15,50	80,0		200			16	2	B			414,30	**160**

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ±0.5 °

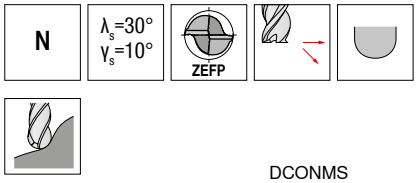

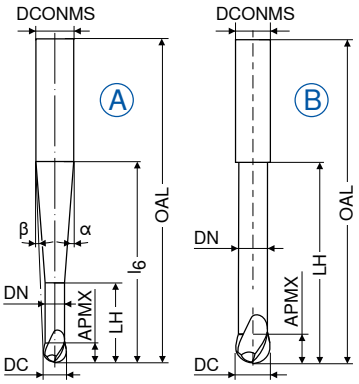

Factory standard

HA

DC e8 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h6 mm	ZEFP	Fig.	V1 Article no. 52 320 ... EUR	
2	3	1,8	8	40	100	3,6	3,0	6	2	A	72,74	**020**
3	4	2,8	12	40	100	3,1	2,1	6	2	A	72,74	**030**
4	5	3,8	16	40	100	2,4	1,2	6	2	A	71,65	**040**
5	6	4,7	20	40	100	1,4	0,7	6	2	A	70,54	**050**
6	6	5,7	25	50	100	2,3	1,2	8	2	A	97,22	**061**
6	6	5,7	25		100			6	2	B	60,51	**060**
8	7	7,7	32		100			8	2	B	90,15	**080**
8	7	7,7	32	60	120	2,0	1,0	10	2	A	134,50	**081**
10	9	9,6	40		120			10	2	B	129,00	**100**
10	9	9,6	40	81	160	1,4	0,7	12	2	A	218,30	**101**
12	11	11,6	50		160			12	2	B	199,50	**120**
12	11	11,6	50	101	200	2,3	1,2	16	2	A	378,00	**121**
16	14	15,6	60		200			16	2	B	340,60	**160**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 350–356

14

Ball nosed cutter 220°

▲ Radius accuracy: ±0.005 mm



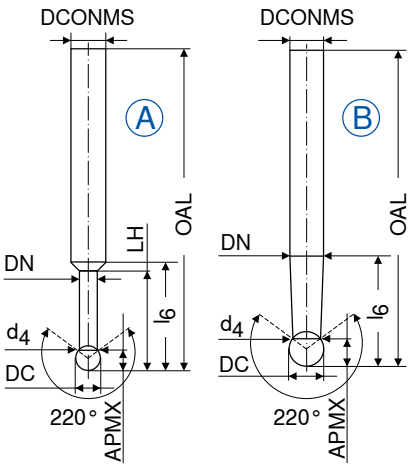

Ti1000

Factory standard

HA

DC f8 mm	APMX mm	DN mm	d_4 mm	LH mm	l_6 mm	OAL mm	DCONMS h6 mm	ZEFP	Fig.	V1 Article no. 52 323 ... EUR	
1,0	0,7	0,85	0,8	5	17	58	6	2	A	108,90	**010**
1,5	1,2	1,25	1,2	8	20	58	6	2	A	108,90	**015**
2,0	1,5	1,70	1,4	10	21	58	6	2	A	108,90	**020**
3,0	2,3	2,70	2,4	15	22	65	6	2	A	109,80	**030**
4,0	3,0	3,70	3,4	20	25	70	6	2	A	112,40	**040**
5,0	3,5	4,70	4,3	25	28	80	6	2	A	117,90	**050**
6,0	4,0	5,90	4,3		30	100	6	2	B	134,50	**060**
8,0	5,4	7,90	6,2		40	100	8	2	B	179,60	**080**
10,0	6,7	9,90	7,6		50	100	10	2	B	235,90	**100**
12,0	9,0	11,90	9,2		110	160	12	2	B	308,60	**121**
12,0	9,0	11,90	9,2		70	120	12	2	B	291,00	**120**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

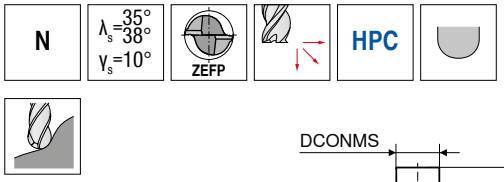

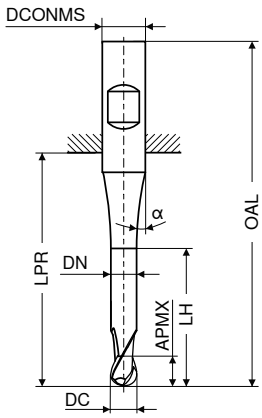

≈DIN 6527 | ≈DIN 6527

HB | HB

V3 | V3

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	α°	ZEFP	Article no. 54 055 ... EUR		Article no. 54 056 ... EUR	
3	5			14	50	6	15	2	20,61	030		
3	8	2,8	12	21	57	6	15	2			20,61	030
4	8			18	54	6	15	2	20,61	040		
4	11	3,8	15	21	57	6	15	2			20,61	040
5	9			18	54	6	15	2	20,61	050		
5	13	4,8	17	21	57	6	15	2			20,61	050
6	10			18	54	6	30	2	21,49	060		
6	13	5,8	21	21	57	6	30	2			24,14	060
8	12			22	58	8	30	2	28,22	080		
8	19	7,7	27	27	63	8	30	2			29,86	080
10	14			26	66	10	30	2	35,27	100		
10	22	9,7	32	32	72	10	30	2			37,80	100
12	16			28	73	12	30	2	51,47	120		
12	26	11,6	38	38	83	12	30	2			59,74	120
16	22			34	82	16	30	2	84,09	160		
16	32	15,5	44	44	92	16	30	2			88,28	160
20	26			42	92	20	30	2	120,10	200		
20	38	19,5	54	54	104	20	30	2			127,80	200

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 350–356

14

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

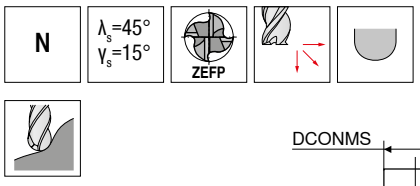

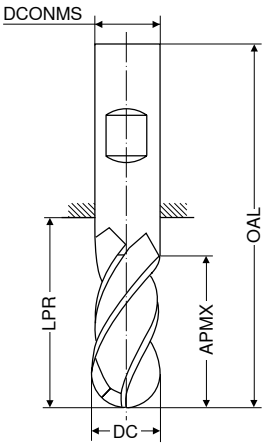

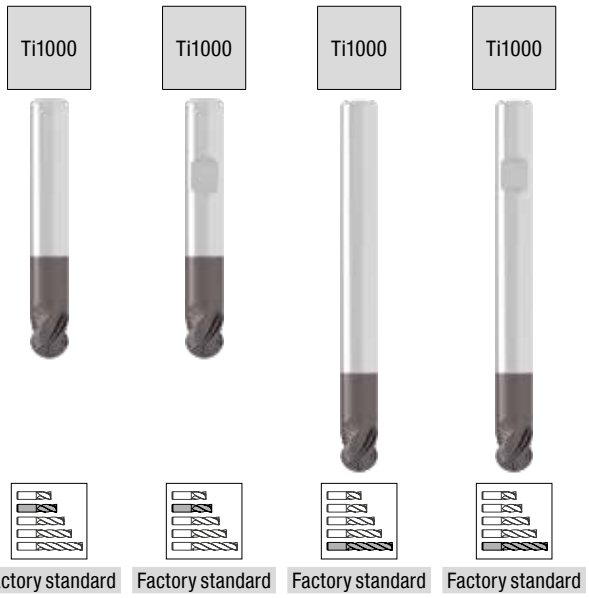

Factory standard | Factory standard | Factory standard | Factory standard

HA | HB | HA | HB

V1 | V1 | V1 | V1

DC f8	APMX	LPR	OAL	DCONMS h6	ZEFP	Article no. 52 400 ...		Article no. 52 401 ...		Article no. 52 402 ...		Article no. 52 403 ...	
mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	5	22	50	3	4	49,38	030						
3	5	47	75	3	4					59,40	030		
4	8	26	54	4	4	50,14	040						
4	8	47	75	4	4					67,67	040		
5	9	26	54	5	4	51,58	050						
5	9	47	75	5	4					68,89	050		
6	10	18	54	6	4	54,34	060	54,34	060				
6	10	64	100	6	4					70,54	060	70,54	060
8	12	23	59	8	4	67,24	080	67,24	080				
8	12	64	100	8	4					89,60	080	89,60	080
10	14	27	67	10	4	91,37	100	91,37	100				
10	14	60	100	10	4					113,60	100	113,60	100
12	16	29	74	12	4	115,80	120	115,80	120				
12	16	55	100	12	4					147,80	120	147,80	120
14	18	30	75	14	4	144,40	140	144,40	140				
14	18	55	100	14	4					180,80	140	180,80	140
16	22	35	83	16	4	189,60	160	189,60	160				
16	22	102	150	16	4					271,10	160	271,10	160
20	26	43	93	20	4	291,00	200	291,00	200				
20	26	100	150	20	4					399,10	200	399,10	200

Steel	○	○	○	○
Stainless steel	●	●	●	●
Cast iron	○	○	○	○
Non ferrous metals	●	●	●	●
Heat resistant alloys	●	●	●	●
hardened materials	○	○	○	○

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

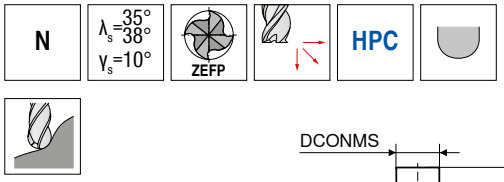

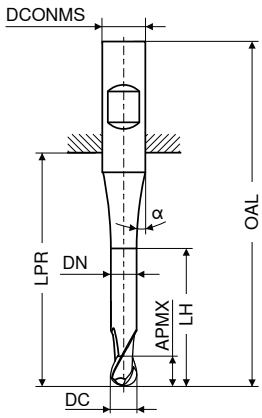

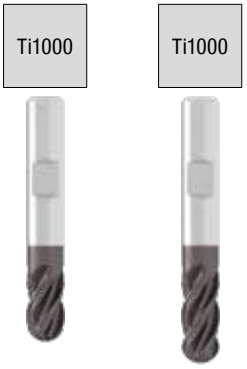

≈DIN 6527 | ≈DIN 6527

HB | HB

V3 | V3

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	α°	ZEFP	Article no. 54 057 ... EUR		Article no. 54 058 ... EUR	
3	5			14	50	6	15	4	20,61	030		
3	8	2,8	12	21	57	6	15	4			20,61	030
4	8			18	54	6	15	4	20,61	040		
4	11	3,8	15	21	57	6	15	4			20,61	040
5	9			18	54	6	15	4	20,61	050		
5	13	4,8	17	21	57	6	15	4			20,61	050
6	10			18	54	6	30	4	21,49	060		
6	13	5,8	21	21	57	6	30	4			24,14	060
8	12			22	58	8	30	4	28,22	080		
8	19	7,7	27	27	63	8	30	4			29,86	080
10	14			26	66	10	30	4	35,27	100		
10	22	9,7	32	32	72	10	30	4			37,80	100
12	16			28	73	12	30	4	51,47	120		
12	26	11,6	38	38	83	12	30	4			59,74	120
16	22			34	82	16	30	4	84,09	160		
16	32	15,5	44	44	92	16	30	4			88,28	160
20	26			42	92	20	30	4	120,10	200		
20	38	19,5	54	54	104	20	30	4			127,80	200

Steel	●	●
Stainless steel	●	●
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	●	●
hardened materials		

→ v_c/f_z Page 350–356

14

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

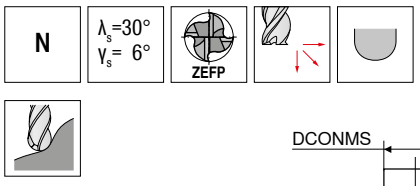

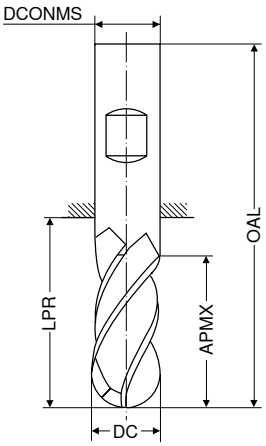

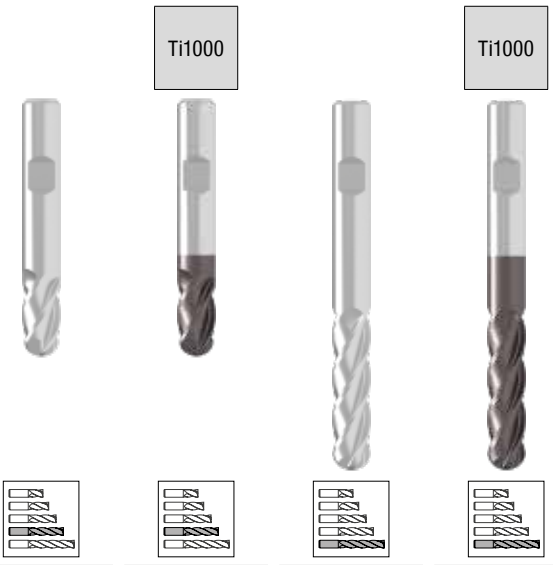

DC f8	APMX	LPR	OAL	DCONMS h5	ZEFP	DIN 6527		DIN 6527		Factory standard		DIN 6527	
						HB		HB		HB		HB	
						V0		V0		V0		V0	
						Article no. 50 642 ...		Article no. 50 643 ...		Article no. 50 642 ...		Article no. 50 643 ...	
mm	mm	mm	mm	mm		EUR		EUR		EUR		EUR	
3	8	21	57	6	4	42,21	030	51,58	030				
4	11	21	57	6	4	42,21	040	51,58	040				
6	13	21	57	6	4	42,21	060	51,58	060				
6	40	64	100	6	4					53,12	061	62,61	061
8	19	27	63	8	4	48,61	080	57,53	080				
8	40	64	100	8	4					59,74	081	69,33	081
10	22	32	72	10	4	82,77	100	91,81	100				
10	40	60	100	10	4					106,70	101	115,80	101
12	26	38	83	12	4	111,30	120	120,10	120				
12	45	55	100	12	4					144,40	121	153,20	121
12	75	105	150	12	4					224,90	122	232,50	122
14	26	38	83	14	4	141,00	140	149,90	140				
14	45	55	100	14	4					199,50	141	205,00	141
16	32	44	92	16	4	198,30	160	203,80	160				
16	75	102	150	16	4					275,60	161	283,30	161
20	38	54	104	20	4	275,60	200	283,30	200				
20	75	100	150	20	4					435,30	201	445,30	201

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials		○		○

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

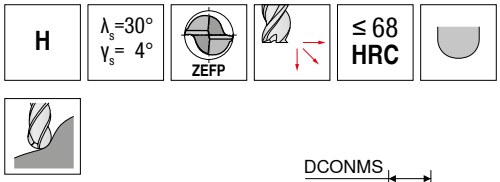

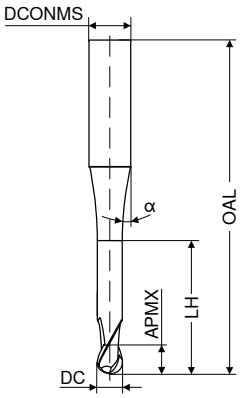

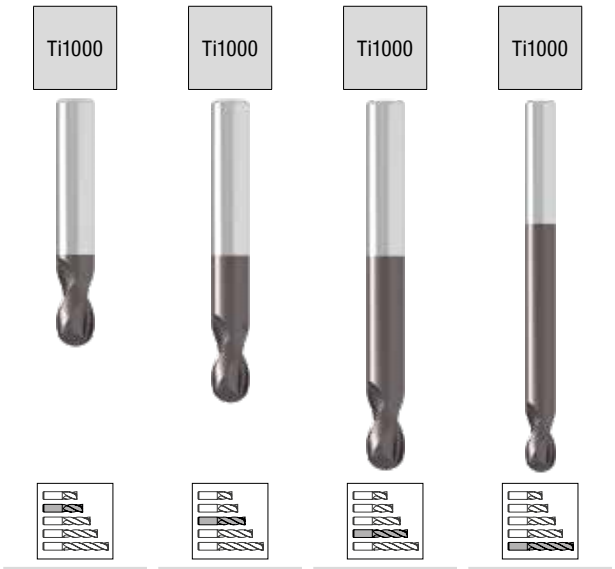

Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA

V0 | V0 | V0 | V0

DC mm	Tol.	APMX mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	Article no. 50 906 ... EUR		Article no. 50 906 ... EUR		Article no. 50 906 ... EUR		Article no. 50 906 ... EUR	
0,20	0/-0,015	0,3	0,6	40	15	4	2	58,64	002						
0,25	0/-0,015	0,3	0,6	40	15	4	2	58,64	925						
0,30	0/-0,015	0,3	0,6	40	15	4	2	58,64	003						
0,35	0/-0,015	0,4	0,7	40	15	4	2	58,64	935						
0,40	0/-0,015	0,4	0,7	40	15	4	2	58,64	004						
0,50	0/-0,015	0,5	0,8	40	15	4	2	58,64	005						
0,50	0/-0,015	0,5	0,8	54	15	6	2	67,34	951						
0,60	0/-0,015	0,6	0,9	40	15	4	2	58,64	006						
0,70	0/-0,015	0,8	1,1	40	15	4	2	58,64	007						
0,80	0/-0,015	0,8	1,1	40	15	4	2	58,64	008						
0,90	0/-0,015	0,9	1,2	40	15	4	2	58,64	009						
1,00	0/-0,015	1,0	1,3	54		4	2					58,64	010		
1,00	0/-0,015	1,0	1,3	54	15	6	2	67,34	011						
1,00	0/-0,015	1,0	1,3	64		6	2					70,54	012		
1,00	0/-0,015	1,0	1,3	80		6	2							73,62	013
1,00	0/-0,015	1,0	1,3	100		6	2							76,60	014
1,20	0/-0,015	1,2	1,5	54		4	2					58,64	112		
1,40	0/-0,015	1,4	1,8	54		4	2					58,64	114		
1,50	0/-0,015	1,5	1,9	54		4	2					58,64	115		
1,50	0/-0,015	1,5	1,9	54	15	6	2	67,34	215						
1,50	0/-0,015	1,5	1,9	80		6	2							73,62	315
1,60	0/-0,015	1,8	2,3	54		4	2					58,64	116		
1,80	0/-0,015	1,8	2,3	54		4	2					58,64	118		
2,00	0/-0,015	2,0	2,5	54		4	2					58,64	206		
2,00	0/-0,015	4,0	5,0	54		6	2					67,34	202		
2,00	0/-0,015	4,0	5,0	64		6	2					70,54	207		
2,00	0/-0,015	4,0	5,0	82		6	2							73,62	204
2,00	0/-0,015	4,0	5,0	100		6	2							76,60	205
2,50	0/-0,02	5,0	6,6	54		4	2					58,64	251		
2,50	0/-0,02	5,0	6,3	54	15	6	2	67,34	252						
2,50	0/-0,02	5,0	6,3	64		6	2					70,87	253		
2,50	0/-0,02	5,0	6,3	82		6	2							73,62	254
2,50	0/-0,02	5,0	6,3	100		6	2							76,60	255
3,00	0/-0,02	5,0	6,3	54		4	2					58,64	030		
3,00	0/-0,02	5,0	6,3	82		4	2							58,64	032
3,00	0/-0,02	5,0	6,3	100		4	2							58,64	033
3,00	0/-0,02	5,0	6,3	54	15	6	2	67,34	035						
3,00	0/-0,02	5,0	6,3	64		6	2					70,54	036		
3,00	0/-0,02	5,0	6,3	82		6	2							73,62	037
3,00	0/-0,02	8,0	10,0	100		6	2							76,60	038
4,00	0/-0,02	8,0		54	15	4	2					58,64	040		
4,00	0/-0,02	8,0		82	15	4	2							69,44	042
4,00	0/-0,02	8,0		100	15	4	2							74,29	043
4,00	0/-0,02	8,0	10,0	54	15	6	2	58,64	045						

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–356

14

Continued on next page

Ball nosed cutter

▲ Radius accuracy: ±0.01 mm

H | λ_s=30° γ_s= 4° | ZEFP | ≤ 68 HRC

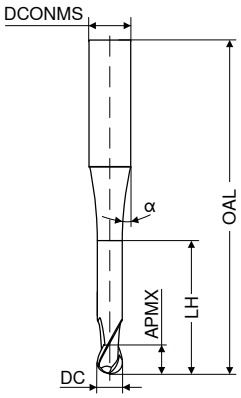

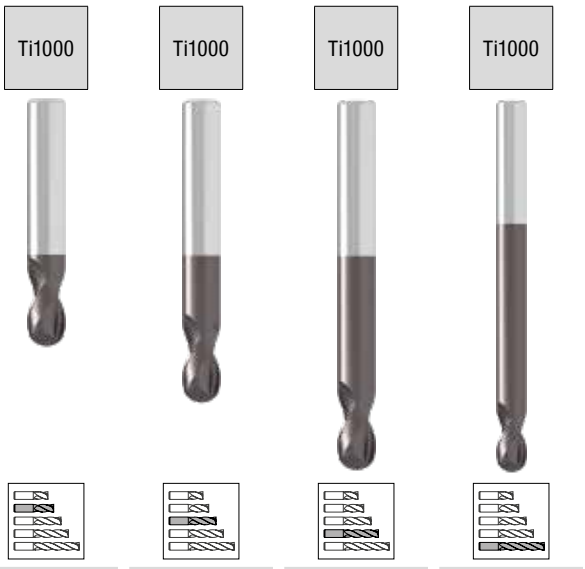

Factory standard | Factory standard | Factory standard | Factory standard

HA | HA | HA | HA

V0 | V0 | V0 | V0

DC mm	Tol.	APMX mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	ZEFP	Article no. 50 906 ... EUR		Article no. 50 906 ... EUR		Article no. 50 906 ... EUR		Article no. 50 906 ... EUR	
4,00	0/-0,02	8,0	10,0	64		6	2					70,54	046		
4,00	0/-0,02	8,0	10,0	82		6	2							73,62	047
4,00	0/-0,02	8,0	10,0	100		6	2							76,60	048
5,00	0/-0,02	9,0		54	15	5	2					58,64	050		
5,00	0/-0,02	9,0		64	15	5	2					70,54	051		
5,00	0/-0,02	9,0		82	15	5	2							73,62	052
5,00	0/-0,02	9,0		100	15	5	2							76,60	053
5,00	0/-0,02	9,0	11,3	54	15	6	2	58,64	055						
5,00	0/-0,02	9,0	11,3	64		6	2					70,54	056		
5,00	0/-0,02	9,0	11,3	82		6	2							73,62	057
5,00	0/-0,02	9,0	11,3	100		6	2							76,60	058
6,00	0/-0,02	10,0		54	15	6	2	58,64	060						
6,00	0/-0,02	10,0		64	15	6	2					70,54	061		
6,00	0/-0,02	10,0		82	15	6	2							73,62	062
6,00	0/-0,02	10,0		100	15	6	2							76,60	063
6,00	0/-0,02	10,0		120	15	6	2							80,02	064
8,00	0/-0,025	12,0		64	15	8	2					64,15	081		
8,00	0/-0,025	12,0		82	15	8	2			81,99	082				
8,00	0/-0,025	12,0		100	15	8	2							99,75	083
8,00	0/-0,025	12,0		120	15	8	2							117,90	084
10,00	0/-0,025	14,0		67	15	10	2	80,24	101						
10,00	0/-0,025	14,0		82	15	10	2			108,10	102				
10,00	0/-0,025	14,0		100	15	10	2							134,50	103
10,00	0/-0,025	14,0		127	15	10	2							164,20	104
12,00	0/-0,025	16,0		75	15	12	2	116,80	121						
12,00	0/-0,025	16,0		100	15	12	2			175,20	122				
12,00	0/-0,025	16,0		150	15	12	2							231,50	123
14,00	0/-0,025	18,0		80	15	14	2	144,40	141						
14,00	0/-0,025	18,0		100	15	14	2			213,80	142				
14,00	0/-0,025	18,0		150	15	14	2							278,80	143
16,00	0/-0,025	22,0		85	15	16	2	170,90	161						
16,00	0/-0,025	22,0		150	15	16	2							375,90	163
20,00	0/-0,025	26,0		90	15	20	2	283,30	201						
20,00	0/-0,025	26,0		150	15	20	2							497,10	203

Steel	●	●	●	●
Stainless steel	○	○	○	○
Cast iron	●	●	●	●
Non ferrous metals	○	○	○	○
Heat resistant alloys	○	○	○	○
hardened materials	○	○	○	○

→ v_c/f_z Page 350–356

Ball nosed cutter

▲ Radius accuracy: ±0.005 mm

H | λ_s=30° γ_s=–3° | ZEFP | 45–66 HRC | Ti1000

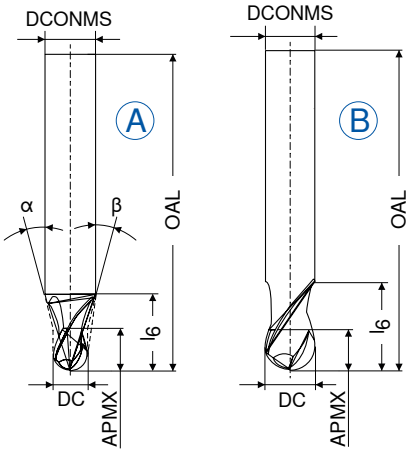

Factory standard

HA

DC ±0,01 mm	APMX mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	V1 Article no. 52 741 ...	EUR
2	1,5	3,3	38	15	9	3	2	A		91,15	020
3	2,0	7,5	57	15	12	6	2	A		87,07	030
4	2,5	6,0	57	15	9	6	2	A		84,43	040
5	3,0	5,0	57	15	6	6	2	A		83,76	050
6	3,5		57	15		6	2	B		80,57	060
8	4,5		63	15		8	2	B		111,30	080
10	5,5		72	15		10	2	B		154,30	100
12	6,5		83	15		12	2	B		197,30	120

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 350–356

14

Ball nose cutter for rough milling

▲ Radius accuracy: ±0.01 mm



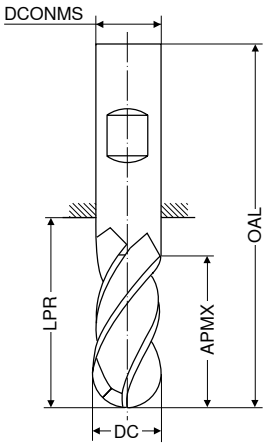

DIN 6527

HB

V0

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	Article no. 50 641 ... EUR	
6	13	21	57	6	4	107,40	**060**
8	19	27	63	8	4	122,30	**080**
10	22	32	72	10	4	126,80	**100**
12	26	38	83	12	4	164,20	**120**
14	26	38	83	14	4	233,60	**140**
16	32	44	92	16	4	239,10	**160**
18	32	44	92	18	4	345,10	**180**
20	38	54	104	20	4	352,70	**200**

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 350–356

Torus cutter

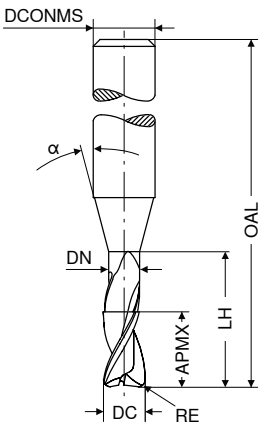

Factory standard

Factory standard

HA

HA

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	V0 Article no. 50 901 ...		V0 Article no. 50 901 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR	
0,2	0,02	0,2	0,18	0,6	55	15	3	2	75,39	021		
0,2	0,02	0,2	0,18	1,0	55	15	3	2	76,16	022		
0,2	0,02	0,2	0,18	1,6	55	15	3	2	76,81	023		
0,2	0,02	0,2	0,18	2,0	55	15	3	2	78,04	024		
0,3	0,03	0,3	0,28	0,9	55	15	3	2	75,39	031		
0,3	0,03	0,3	0,28	1,5	55	15	3	2	76,16	032		
0,3	0,03	0,3	0,28	2,4	55	15	3	2	76,81	033		
0,3	0,03	0,3	0,28	3,0	55	15	3	2	78,04	034		
0,4	0,04	0,4	0,37	1,2	55	15	3	2	75,39	041		
0,4	0,04	0,4	0,37	2,0	55	15	3	2	76,16	042		
0,4	0,04	0,4	0,37	3,2	55	15	3	2	76,81	043		
0,4	0,04	0,4	0,37	4,0	55	15	3	2	78,04	044		
0,5	0,05	0,5	0,45	1,5	55	15	3	2	73,74	051		
0,5	0,05	0,5	0,45	2,5	55	15	3	2	74,39	052		
0,5	0,05	0,5	0,45	4,0	55	15	3	2	75,39	053		
0,5	0,05	0,5	0,45	5,0	55	15	3	2	76,16	054		
0,6	0,06	0,6	0,58	2,0	55	15	3	2	63,48	061		
0,6	0,06	0,6	0,58	3,0	55	15	3	2	63,48	062		
0,6	0,06	0,6	0,58	4,2	55	15	3	2	61,71	063		
0,6	0,06	0,6	0,58	5,0	65	15	3	2			73,07	064
0,6	0,06	0,6	0,58	6,0	65	15	3	2			71,42	065
0,8	0,08	0,8	0,77	2,5	55	15	3	2	61,71	081		
0,8	0,08	0,8	0,77	4,0	55	15	3	2	61,71	082		
0,8	0,08	0,8	0,77	6,5	65	15	3	2			68,66	083
0,8	0,08	0,8	0,77	8,0	65	15	3	2			71,42	084
1,0	0,10	1,0	0,95	3,0	55	15	3	2	61,71	101		
1,0	0,10	1,0	0,95	5,0	55	15	3	2	61,71	102		
1,0	0,10	1,0	0,95	8,0	65	15	3	2			65,24	103
1,0	0,10	1,0	0,95	10,0	65	15	3	2			71,42	104
1,0	0,10	1,0	0,95	12,0	65	15	3	2			73,07	105
1,2	0,12	1,2	1,15	3,0	55	15	3	2	61,71	121		
1,2	0,12	1,2	1,15	6,0	55	15	3	2	61,71	122		
1,2	0,12	1,2	1,15	10,0	65	15	3	2			68,66	123
1,2	0,12	1,2	1,15	12,0	65	15	3	2			71,42	124
1,3	0,13	1,3	1,25	4,0	55	15	3	2	61,71	131		
1,3	0,13	1,3	1,25	7,0	55	15	3	2	63,48	132		
1,3	0,13	1,3	1,25	11,0	65	15	3	2			68,66	133
1,3	0,13	1,3	1,25	13,0	65	15	3	2			73,07	134
1,5	0,15	1,5	1,44	5,0	55	15	3	2	63,48	151		
1,5	0,15	1,5	1,44	7,5	55	15	3	2	61,71	152		
1,5	0,15	1,5	1,44	12,0	65	15	3	2			73,07	153
1,5	0,15	1,5	1,44	15,0	65	15	3	2			71,42	154
1,6	0,16	1,6	1,52	5,0	55	15	3	2	63,48	161		
1,6	0,16	1,6	1,52	8,0	55	15	3	2	63,48	162		
1,6	0,16	1,6	1,52	13,0	65	15	3	2			68,66	163

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 350–356

14

Continued on next page

Torus cutter

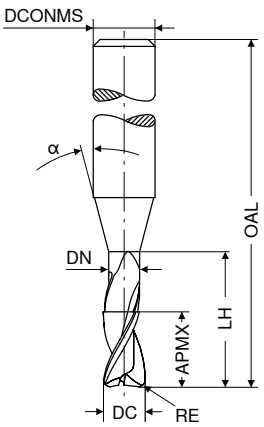

Factory standard

Factory standard

HA

HA

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	V0 Article no. 50 901 ...		V0 Article no. 50 901 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR	
1,6	0,16	1,6	1,52	16,0	65	15	3	2			73,07	164
1,8	0,18	1,8	1,72	5,5	55	15	3	2	61,71	181		
1,8	0,18	1,8	1,72	9,0	55	15	3	2	63,48	182		
1,8	0,18	1,8	1,72	14,5	65	15	3	2			68,66	183
1,8	0,18	1,8	1,72	18,0	65	15	3	2			73,07	184
2,0	0,20	2,0	1,92	6,0	55	15	3	2	61,71	201		
2,0	0,20	2,0	1,92	10,0	55	15	3	2	63,48	202		
2,0	0,20	2,0	1,92	14,0	55	15	3	2	61,71	203		
2,0	0,20	2,0	1,92	16,0	65	15	3	2			73,07	204
2,0	0,20	2,0	1,92	20,0	65	15	3	2			71,42	205
2,3	0,23	2,3	2,22	7,0	55	15	3	2	61,71	231		
2,3	0,23	2,3	2,22	11,5	55	15	3	2	63,48	232		
2,3	0,23	2,3	2,22	14,0	55	15	3	2	65,24	233		
2,3	0,23	2,3	2,22	18,5	65	15	3	2			73,07	234
2,3	0,23	2,3	2,22	20,0	65	15	3	2			73,07	235
2,3	0,23	2,3	2,22	23,0	65	15	3	2			73,07	236
3,0	0,30	3,0	2,90	9,0	65	15	6	2	65,24	301		
3,0	0,30	3,0	2,90	15,0	65	15	6	2	73,07	302		
3,0	0,30	3,0	2,90	24,0	100	15	6	2			79,25	303
3,0	0,30	3,0	2,90	30,0	100	15	6	2			82,67	304
4,0	0,40	4,0	3,90	12,0	65	15	6	2	73,07	401		
4,0	0,40	4,0	3,90	20,0	65	15	6	2	73,07	402		
4,0	0,40	4,0	3,90	32,0	100	15	6	2			82,67	403
4,0	0,40	4,0	3,90	40,0	100	15	6	2			85,09	404
5,0	0,50	5,0	4,90	15,0	65	15	6	2	73,07	501		
5,0	0,50	5,0	4,90	25,0	65	15	6	2	73,07	502		
5,0	0,50	5,0	4,90	40,0	100	15	6	2			85,09	503
5,0	0,50	5,0	4,90	50,0	100	15	6	2			89,39	504
6,0	0,60	6,0	5,90	18,0	65	15	6	2	73,07	601		
6,0	0,60	6,0	5,90	30,0	100	15	6	2			82,67	602
6,0	0,60	6,0	5,90	48,0	100	15	6	2			89,39	603
6,0	0,60	6,0	5,90	60,0	100	15	6	2			92,14	604

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 350–356

Torus cutter

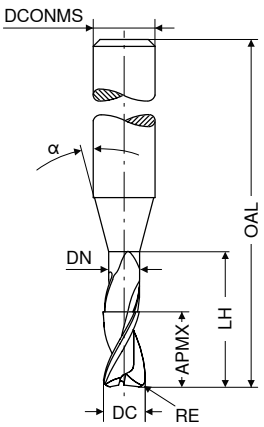

Factory standard | Factory standard | Factory standard

HA | HA | HA

V0 | V0 | V0

DC f8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	Article no. 50 902 ... EUR		Article no. 50 902 ... EUR		Article no. 50 902 ... EUR	
2	0,3	2	1,8	12	50	45	6	2	66,24	020				
2	0,5	2	1,8	12	50	45	6	2	66,24	023				
2	0,3	2	1,8	22	60	45	6	2			66,24	021		
2	0,5	2	1,8	22	60	45	6	2			66,24	024		
2	0,3	2	1,8	47	85	45	6	2					96,22	022
2	0,5	2	1,8	47	85	45	6	2					96,22	025
3	0,3	2	2,8	12	50	45	6	2	66,24	030				
3	0,5	2	2,8	12	50	45	6	2	66,24	033				
3	0,3	2	2,8	22	60	45	6	2			66,24	031		
3	0,5	2	2,8	22	60	45	6	2			66,24	034		
3	0,3	2	2,8	47	85	45	6	2					96,22	032
3	0,5	2	2,8	47	85	45	6	2					96,22	035
4	0,3	3	3,8	16	54	45	6	2	66,24	040				
4	0,5	3	3,8	16	54	45	6	2	66,24	043				
4	1,0	3	3,8	16	54	45	6	2	66,24	046				
4	0,3	3	3,8	37	75	45	6	2			92,14	041		
4	0,5	3	3,8	37	75	45	6	2			92,14	044		
4	1,0	3	3,8	37	75	45	6	2			92,14	047		
4	0,3	3	3,8	47	85	45	6	2					96,22	042
4	0,5	3	3,8	47	85	45	6	2					96,22	045
4	1,0	3	3,8	47	85	45	6	2					96,22	048
5	0,5	3	4,6	16	54	45	6	2	66,24	050				
5	1,0	3	4,6	16	54	45	6	2	66,24	052				
5	1,5	3	4,6	16	54	45	6	2	66,24	054				
5	0,5	3	4,6	37	75	45	6	2			92,14	051		
5	1,0	2	4,6	37	75	45	6	2			92,14	053		
5	1,5	3	4,6	37	75	45	6	2			92,14	055		
6	0,5	4	5,6	16	54	45	6	2	66,24	060				
6	1,0	4	5,6	16	54	45	6	2	66,24	063				
6	2,0	4	5,6	16	54	45	6	2	66,24	066				
6	0,5	4	5,6	47	85	45	6	2			92,14	061		
6	1,0	4	5,6	47	85	45	6	2			92,14	064		
6	2,0	4	5,6	47	85	45	6	2			92,14	067		
6	0,5	4	5,6	47	85	45	8	2			124,60	069		
6	1,0	4	5,6	47	85	45	8	2			124,60	070		
6	2,0	4	5,6	47	85	45	8	2			124,60	071		
6	0,5	4	5,6	62	100	45	6	2					106,90	062
6	1,0	4	5,6	62	100	45	6	2					106,90	065
6	2,0	4	5,6	62	100	45	6	2					106,90	068
8	0,5	4	7,6	20	58	45	8	2	80,46	080				
8	1,0	4	7,6	20	58	45	8	2	80,46	082				

Steel			
Stainless steel			
Cast iron			
Non ferrous metals	●	●	●
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 350–356

14

Continued on next page

Torus cutter

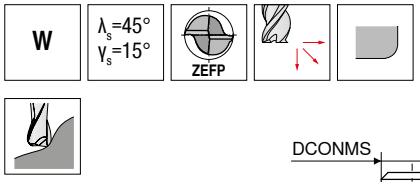

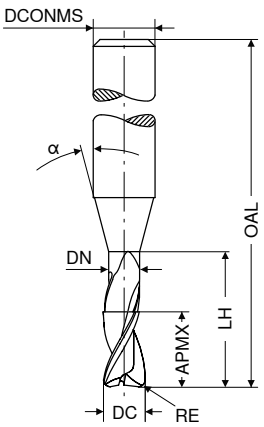

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	Factory standard HA V0 Article no. 50 902 ...		Factory standard HA V0 Article no. 50 902 ...		Factory standard HA V0 Article no. 50 902 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR		EUR	
8	2,0	4	7,6	20	58	45	8	2	80,46	084				
8	0,5	4	7,6	62	100	45	8	2					125,70	081
8	1,0	4	7,6	62	100	45	8	2					125,70	083
8	2,0	4	7,6	62	100	45	8	2					125,70	085
8	2,0	4	7,6	62	100	45	10	2					174,10	086
10	1,0	6	9,6	18	66	45	10	2	100,50	100				
10	2,0	6	9,6	18	66	45	10	2	100,50	103				
10	3,0	6	9,6	18	66	45	10	2	100,50	106				
10	1,0	6	9,6	58	100	45	10	2			173,10	101		
10	2,0	6	9,6	58	100	45	10	2			173,10	104		
10	3,0	6	9,6	58	100	45	10	2			173,10	107		
10	1,0	6	9,6	78	120	45	10	2					202,80	102
10	2,0	6	9,6	78	120	45	10	2					202,80	105
10	3,0	6	9,6	78	120	45	10	2					202,80	108
10	1,0	6	9,6	78	120	45	12	2					264,60	109
10	2,0	6	9,6	78	120	45	12	2					264,60	110
10	3,0	6	9,6	78	120	45	12	2					264,60	111
12	1,0	8	11,5	26	73	45	12	2	147,80	120				
12	2,0	8	11,5	26	73	45	12	2	147,80	123				
12	3,0	8	11,5	26	73	45	12	2	147,80	126				
12	4,0	8	11,5	26	73	45	12	2	147,80	129				
12	1,0	8	11,5	53	100	45	12	2			220,50	121		
12	2,0	8	11,5	53	100	45	12	2			220,50	124		
12	3,0	8	11,5	53	100	45	12	2			220,50	127		
12	4,0	8	11,5	53	100	45	12	2			220,50	130		
12	1,0	8	11,5	73	120	45	12	2					264,60	122
12	2,0	8	11,5	73	120	45	12	2					264,60	125
12	3,0	8	11,5	73	120	45	12	2					264,60	128
12	4,0	8	11,5	73	120	45	12	2					264,60	131
12	1,0	8	11,5	103	150	45	16	2					535,60	132
12	2,0	8	11,5	103	150	45	16	2					535,60	133
12	3,0	8	11,5	103	150	45	16	2					535,60	134
12	4,0	8	11,5	103	150	45	16	2					535,60	135

Steel			
Stainless steel			
Cast iron			
Non ferrous metals	●	●	●
Heat resistant alloys			
hardened materials			

→ v_c/f_z Page 350–356

Torus cutter

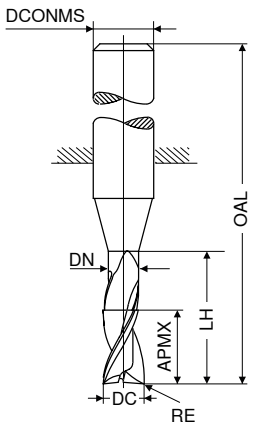

DIAMOND

Factory standard

HA

DC h10	RE	APMX	DN	LH	OAL	DCONMS h6	ZEFP	V1 Article no. 52 765 ...	
mm	mm	mm	mm	mm	mm	mm		EUR	
2	0,3	8	1,8	31	60	2	2	147,80	021
3	0,5	12	2,8	41	70	3	2	155,50	032
4	0,5	15	3,8	51	80	4	2	194,00	042
5	0,5	20	4,8	71	100	5	2	222,60	052
6	0,8	20	5,8	63	100	6	2	243,60	063
8	1,0	20	7,8	83	120	8	2	322,90	084
10	1,0	25	9,8	99	140	10	2	410,10	104
12	1,5	25	11,8	104	150	12	2	543,40	125

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

Torus cutter

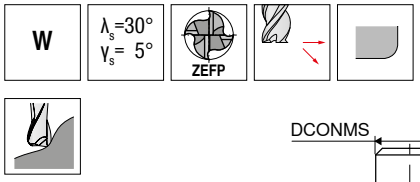

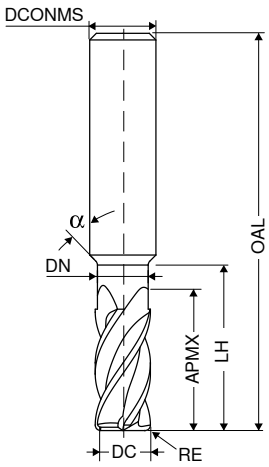

Factory standard | Factory standard

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	V0 Article no. 50 911 ...		V0 Article no. 50 911 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR	
4	0,5	8	3,8	12	54	45	6	4	133,30	040		
4	1,0	8	3,8	12	54	45	6	4	133,30	041		
4	0,5	10	3,8	37	75	45	6	4			159,90	042
4	1,0	10	3,8	37	75	45	6	4			159,90	043
5	0,5	9	4,8	16	54	45	6	4	133,30	050		
5	1,0	9	4,8	16	54	45	6	4	133,30	051		
5	1,5	9	4,8	16	54	45	6	4	133,30	052		
5	0,5	12	4,8	37	75	45	6	4			159,90	053
5	1,0	12	4,8	37	75	45	6	4			159,90	054
5	1,5	12	4,8	37	75	45	6	4			159,90	055
6	0,5	10	5,6	16	54	45	6	4	133,30	060		
6	1,0	10	5,6	16	54	45	6	4	133,30	061		
6	1,5	10	5,6	16	54	45	6	4	133,30	062		
6	2,0	10	5,6	16	54	45	6	4	133,30	063		
6	0,5	12	5,6	62	100	45	6	4			176,30	064
6	1,0	12	5,6	62	100	45	6	4			176,30	065
6	1,5	12	5,6	62	100	45	6	4			176,30	066
6	2,0	12	5,6	62	100	45	6	4			176,30	067
7	0,5	11	6,6	20	58	45	8	4	176,30	070		
7	1,0	11	6,6	20	58	45	8	4	176,30	071		
7	1,5	11	6,6	20	58	45	8	4	176,30	072		
7	2,0	11	6,6	20	58	45	8	4	176,30	073		
7	0,5	14	6,6	62	100	45	8	4			222,60	074
7	1,0	14	6,6	62	100	45	8	4			222,60	075
7	1,5	14	6,6	62	100	45	8	4			222,60	076
7	2,0	14	6,6	62	100	45	8	4			222,60	077
8	0,5	12	7,6	20	58	45	8	4	176,30	080		
8	1,0	12	7,6	20	58	45	8	4	176,30	081		
8	1,5	12	7,6	20	58	45	8	4	176,30	086		
8	2,0	12	7,6	20	58	45	8	4	176,30	083		
8	0,5	14	7,6	62	100	45	8	4			222,60	084
8	1,0	14	7,6	62	100	45	8	4			222,60	085
8	1,5	14	7,6	62	100	45	8	4			222,60	082
8	2,0	14	7,6	62	100	45	8	4			222,60	087
10	0,5	14	9,6	24	66	45	10	4	223,80	100		
10	1,0	14	9,6	24	66	45	10	4	223,80	101		
10	1,5	14	9,6	24	66	45	10	4	223,80	107		
10	2,0	14	9,6	24	66	45	10	4	223,80	103		
10	3,0	14	9,6	24	66	45	10	4	223,80	104		
10	0,5	18	9,6	58	100	45	10	4			292,00	105
10	1,0	18	9,6	58	100	45	10	4			292,00	106

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 348

Continued on next page

Torus cutter

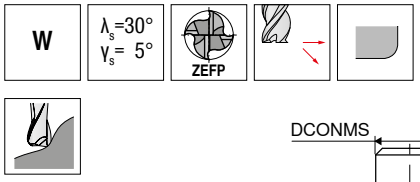

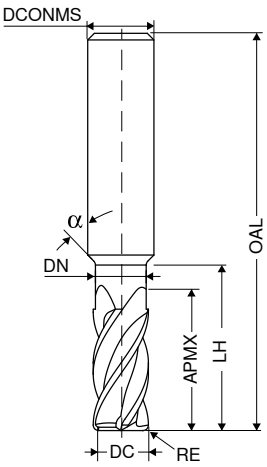

Factory standard

Factory standard

V0

V0

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	Article no. 50 911 ...		Article no. 50 911 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR	
10	1,5	18	9,6	58	100	45	10	4			292,00	102
10	2,0	18	9,6	58	100	45	10	4			292,00	108
10	3,0	18	9,6	58	100	45	10	4			292,00	109
12	0,5	16	11,5	26	73	45	12	4	295,40	120		
12	1,0	16	11,5	26	73	45	12	4	295,40	121		
12	1,5	16	11,5	26	73	45	12	4	295,40	127		
12	2,0	16	11,5	26	73	45	12	4	295,40	123		
12	4,0	16	11,5	26	73	45	12	4	295,40	124		
12	0,5	22	11,5	53	100	45	12	4			371,40	125
12	1,0	22	11,5	53	100	45	12	4			371,40	126
12	1,5	22	11,5	53	100	45	12	4			371,40	122
12	2,0	22	11,5	53	100	45	12	4			371,40	128
12	4,0	22	11,5	53	100	45	12	4			371,40	129

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 348

14

Torus cutter

▲ Radius accuracy: ±0.005 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ±0.5°

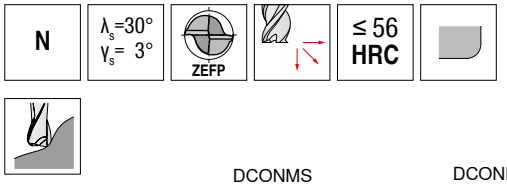

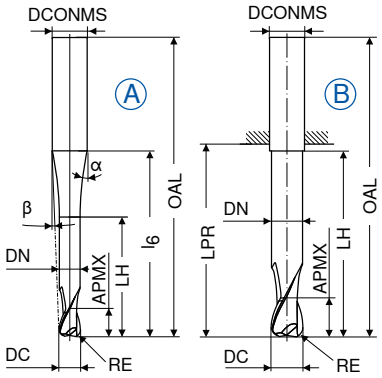

Factory standard | Factory standard

HA | HA

DC ±0,01	RE ±0,005	APMX	DN	LH	l_6	OAL	α°	β°	DCONMS h5	ZEFP	Fig.	V1 Article no. 52 730 ...		V1 Article no. 52 734 ...	
mm	mm	mm	mm	mm	mm	mm			mm			EUR		EUR	
0,5	0,10	1,0	0,45	2,0	20	57	10,0	8,5	6	2	A	132,30	005		
1,0	0,25	2,0	0,95	4,0	20	57	10,0	8,0	6	2	A	123,50	010		
1,0	0,25	2,0	0,95	4,0	40	80	4,5	4,0	6	2	A			131,30	010
1,5	0,30	2,5	1,40	7,5	20	57	12,5	7,0	6	2	A	117,90	015		
1,5	0,30	2,5	1,40	7,5	40	80	4,5	3,5	6	2	A			124,60	015
2,0	0,50	3,0	1,80	8,0	20	57	12,0	6,5	6	2	A	98,75	020		
2,0	0,50	3,0	1,80	8,0	40	80	4,0	3,0	6	2	A			109,80	020
3,0	0,50	3,5	2,80	10,0	20	57	11,5	5,0	6	2	A	95,34	030		
3,0	0,50	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A			106,60	030
4,0	0,50	4,0	3,80	12,0	20	57	11,0	3,5	6	2	A	89,06	041		
4,0	0,50	4,0	3,80	20,0	40	80	4,0	1,5	6	2	A			105,70	041
4,0	1,00	4,0	3,80	12,0	20	57	11,0	3,5	6	2	A	93,35	040		
4,0	1,00	4,0	3,80	20,0	40	80	4,0	1,5	6	2	A			103,60	040
5,0	1,00	5,0	4,70	14,0	20	57	10,0	2,0	6	2	A	87,62	051		
5,0	1,00	5,0	4,70	25,0	40	80	3,0	1,0	6	2	A			104,40	051
5,0	1,50	5,0	4,70	14,0	20	57	10,0	2,0	6	2	A	91,59	050		
5,0	1,50	5,0	4,70	25,0	40	80	3,0	1,0	6	2	A			108,10	050
6,0	1,00	6,0	5,60	20,0		57			6	2	B	81,57	961		
6,0	1,00	6,0	5,60	40,0		80			6	2	B			99,30	961
6,0	2,00	6,0	5,60	20,0		57			6	2	B	85,42	060		
6,0	2,00	6,0	5,60	40,0		80			6	2	B			104,00	060
6,0	2,00	6,0	5,60	25,0	60	100	2,0	1,0	8	2	A			127,80	061
8,0	1,00	7,0	7,60	25,0		63			8	2	B	112,40	082		
8,0	1,00	7,0	7,60	60,0		100			8	2	B			131,30	082
8,0	2,00	7,0	7,60	25,0		63			8	2	B	119,10	080		
8,0	2,00	7,0	7,60	60,0		100			8	2	B			129,00	080
8,0	2,00	7,0	7,60	30,0	75	120	2,0	1,0	10	2	A			180,80	081
8,0	2,50	7,0	7,60	60,0		100			8	2	B			120,10	083
10,0	1,50	8,0	9,60	30,0		72			10	2	B	166,50	102		
10,0	1,50	8,0	9,60	75,0		120			10	2	B			179,60	102
10,0	2,50	8,0	9,60	75,0		120			10	2	B			164,20	104
10,0	3,00	8,0	9,60	30,0		72			10	2	B	162,00	100		
10,0	3,00	8,0	9,60	50,0		100			10	2	B			151,00	103
10,0	3,00	8,0	9,60	75,0		120			10	2	B			175,20	100
10,0	3,00	8,0	9,60	40,0	110	160	1,0	0,5	12	2	A			266,80	101
12,0	1,50	10,0	11,50	35,0		83			12	2	B	202,80	122		
12,0	1,50	10,0	11,50	70,0		160			12	2	B			262,30	122
12,0	4,00	10,0	11,50	35,0		83			12	2	B	206,10	120		
12,0	4,00	10,0	11,50	35,0	40	92	37,0	3,5	16	2	A	282,20	121		
12,0	4,00	10,0	11,50	70,0		160			12	2	B			257,90	120
12,0	4,00	10,0	11,50	50,0	150	200	1,5	1,0	16	2	A			426,60	121
16,0	5,00	12,0	15,50	40,0		92			16	2	B	277,80	160		
16,0	5,00	12,0	15,50	80,0		200			16	2	B			426,60	160

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–356

Torus cutter

H | λ_s=30° γ_s= 3° | ZEFP | ≤ 54 HRC

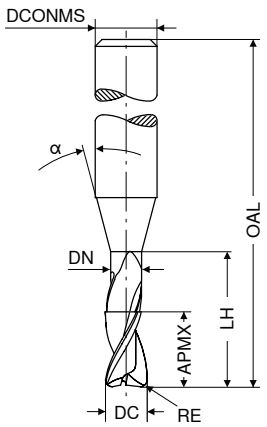

Factory standard | Factory standard

HA | HA

V0 | V0

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	Article no. 50 649 ...		Article no. 50 649 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR	
0,2	0,02	0,2	0,18	0,6	55	15	6	2	75,61	921		
0,2	0,02	0,2	0,18	1,0	55	15	6	2	76,16	022		
0,2	0,02	0,2	0,18	1,6	55	15	6	2	76,81	023		
0,2	0,02	0,2	0,18	2,0	55	15	6	2	78,04	024		
0,3	0,03	0,3	0,28	0,9	55	15	6	2	75,61	031		
0,3	0,03	0,3	0,28	1,5	55	15	6	2	76,16	032		
0,3	0,03	0,3	0,28	2,4	55	15	6	2	76,81	033		
0,3	0,03	0,3	0,28	3,0	55	15	6	2	78,04	034		
0,4	0,04	0,4	0,37	1,2	55	15	6	2	75,61	041		
0,4	0,04	0,4	0,37	2,0	55	15	6	2	76,16	042		
0,4	0,04	0,4	0,37	3,2	55	15	6	2	76,81	043		
0,4	0,04	0,4	0,45	4,0	55	15	6	2	78,04	044		
0,5	0,05	0,5	0,45	1,5	55	15	6	2	73,74	051		
0,5	0,05	0,5	0,45	2,5	55	15	6	2	74,39	052		
0,5	0,05	0,5	0,45	4,0	55	15	6	2	75,61	053		
0,5	0,05	0,5	0,45	5,0	55	15	6	2	76,16	054		
0,6	0,06	0,6	0,58	2,0	55	15	6	2	63,48	061		
0,6	0,06	0,6	0,58	3,0	55	15	6	2	63,48	960		
0,6	0,06	0,6	0,58	5,0	65	15	6	2			67,34	063
0,6	0,06	0,6	0,58	6,0	65	15	6	2	73,07	961		
0,8	0,08	0,8	0,77	2,5	55	15	6	2	61,71	081		
0,8	0,08	0,8	0,77	4,0	55	15	6	2	63,48	980		
0,8	0,08	0,8	0,77	6,5	65	15	6	2			68,66	083
0,8	0,08	0,8	0,77	8,0	65	15	6	2	73,07	981		
1,0	0,10	1,0	0,95	3,0	55	15	6	2	61,71	101		
1,0	0,10	1,0	0,95	5,0	55	15	6	2	63,48	010		
1,0	0,10	1,0	0,95	8,0	65	15	6	2			65,24	103
1,0	0,10	1,0	0,95	10,0	65	15	6	2			70,97	011
1,0	0,10	1,0	0,95	12,0	65	15	6	2			73,07	105
1,2	0,12	1,2	1,15	3,0	55	15	6	2	61,71	121		
1,2	0,12	1,2	1,15	6,0	55	15	6	2	63,48	012		
1,2	0,12	1,2	1,15	10,0	65	15	6	2	68,66	123		
1,2	0,12	1,2	1,15	12,0	65	15	6	2			73,07	013
1,3	0,13	1,3	1,25	4,0	55	15	6	2	61,71	131		
1,3	0,13	1,3	1,25	7,0	55	15	6	2	63,48	132		
1,3	0,13	1,3	1,25	11,0	65	15	6	2			68,66	133
1,3	0,13	1,3	1,25	13,0	65	15	6	2			73,07	134
1,5	0,15	1,5	1,44	5,0	55	15	6	2	63,48	151		
1,5	0,15	1,5	1,44	7,5	55	15	6	2	63,48	015		
1,5	0,15	1,5	1,44	12,0	65	15	6	2			73,07	153
1,5	0,15	1,5	1,44	15,0	65	15	6	2			73,07	016

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–356

14

Continued on next page

Torus cutter

H | λ_s=30° γ_s= 3° | ZEFP | ≤ 54 HRC

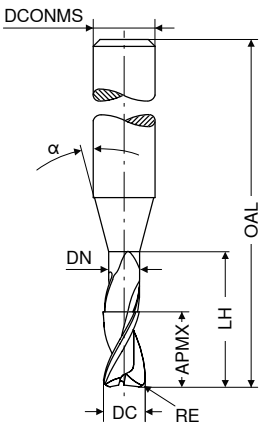

Factory standard | Factory standard

HA | HA

V0 | V0

DC f8	RE ±0,01	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	Article no. 50 649 ...		Article no. 50 649 ...	
mm	mm	mm	mm	mm	mm		mm		EUR		EUR	
1,6	0,16	1,6	1,52	5,0	55	15	6	2	63,48	161		
1,6	0,16	1,6	1,52	8,0	55	15	6	2	63,48	162		
1,6	0,16	1,6	1,52	13,0	65	15	6	2			68,66	163
1,6	0,16	1,6	1,52	16,0	65	15	6	2			73,07	164
1,8	0,18	1,8	1,72	5,5	55	15	6	2	61,71	181		
1,8	0,18	1,8	1,72	9,0	55	15	6	2	63,48	182		
1,8	0,18	1,8	1,72	14,5	65	15	6	2			68,66	183
1,8	0,18	1,8	1,72	18,0	65	15	6	2			73,07	184
2,0	0,20	2,0	1,92	6,0	55	15	6	2	61,71	201		
2,0	0,20	2,0	1,92	10,0	55	15	6	2	63,48	202		
2,0	0,20	2,0	1,92	14,0	55	15	6	2	63,48	020		
2,0	0,20	2,0	1,92	16,0	65	15	6	2			73,07	204
2,0	0,20	2,0	1,92	20,0	65	15	6	2			73,07	021
2,3	0,23	2,3	2,22	7,0	55	15	6	2	63,48	231		
2,3	0,23	2,3	2,22	11,5	55	15	6	2	65,24	232		
2,3	0,23	2,3	2,22	18,5	65	15	6	2			73,07	233
2,3	0,23	2,3	2,22	23,0	65	15	6	2			73,07	234
3,0	0,30	3,0	2,90	9,0	65	15	6	2	65,24	301		
3,0	0,30	3,0	2,90	15,0	65	15	6	2	73,07	302		
3,0	0,30	3,0	2,90	24,0	100	15	6	2			79,25	303
3,0	0,30	3,0	2,90	30,0	100	15	6	2			82,67	304
4,0	0,40	4,0	3,90	12,0	65	15	6	2	73,07	401		
4,0	0,40	4,0	3,90	20,0	65	15	6	2	73,07	402		
4,0	0,40	4,0	3,90	32,0	100	15	6	2			82,67	403
4,0	0,40	4,0	3,90	40,0	100	15	6	2			85,09	404
5,0	0,50	5,0	4,90	15,0	65	15	6	2	73,07	501		
5,0	0,50	5,0	4,90	25,0	65	15	6	2	73,07	502		
5,0	0,50	5,0	4,90	40,0	100	15	6	2			85,09	503
5,0	0,50	5,0	4,90	50,0	100	15	6	2			89,39	504
6,0	0,60	6,0	5,90	18,0	65	15	6	2	73,07	601		
6,0	0,60	6,0	5,90	30,0	100	15	6	2			82,67	602
6,0	0,60	6,0	5,90	48,0	100	15	6	2			89,39	603
6,0	0,60	6,0	5,90	60,0	100	15	6	2			92,14	604

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–356

Torus cutter

H | λ_s=30° γ_s= 3° | ZEFP | ≤ 68 HRC

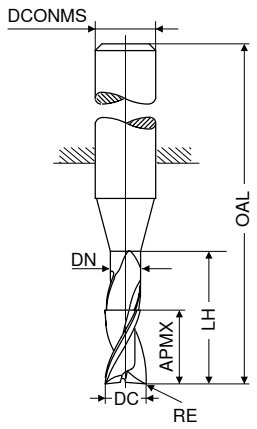

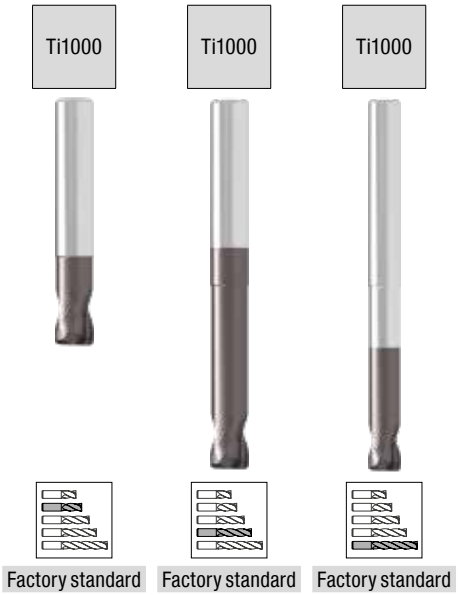

Factory standard | Factory standard | Factory standard

HA | HA | HA

V0 | V0 | V0

DC f8	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	Article no. 50 651 ...	EUR		Article no. 50 651 ...	EUR		Article no. 50 651 ...	EUR	
mm	mm	mm	mm	mm	mm	mm										
2	0,3	2	1,8	7	50	6	2		53,24	020						
2	0,5	2	1,8	7	50	6	2		53,24	021						
2	0,3	2	1,8	7	60	6	2					53,24	022			
2	0,5	2	1,8	7	60	6	2					53,24	023			
2	0,3	2	1,8	7	85	6	2								77,59	024
2	0,5	2	1,8	7	85	6	2								77,59	025
3	0,3	2	2,8	7	50	6	2		53,24	030						
3	0,5	2	2,8	7	50	6	2		53,24	031						
3	0,3	2	2,8	12	60	6	2					53,24	032			
3	0,5	2	2,8	12	60	6	2					53,24	033			
3	0,3	2	2,8	12	85	6	2								77,59	034
3	0,5	2	2,8	12	85	6	2								77,59	035
4	0,3	3	3,8	13	54	6	2		53,24	040						
4	0,5	3	3,8	13	54	6	2		53,24	041						
4	1,0	3	3,8	13	54	6	2		53,24	042						
4	0,3	3	3,8	20	75	6	2					74,62	043			
4	0,5	3	3,8	20	75	6	2					74,62	044			
4	1,0	3	3,8	20	75	6	2					74,62	045			
4	0,3	3	3,8	20	85	6	2								77,59	046
4	0,5	3	3,8	20	85	6	2								77,59	047
4	1,0	3	3,8	20	85	6	2								77,59	048
5	0,5	3	4,6	13	54	6	2		53,24	050						
5	1,0	3	4,6	13	54	6	2		53,24	051						
5	1,5	3	4,6	13	54	6	2		53,24	052						
5	1,0	3	4,6	20	75	6	2					74,62	053			
5	1,5	3	4,6	20	75	6	2					74,62	054			
6	0,5	4	5,6	14	54	6	2		53,24	060						
6	1,0	4	5,6	14	54	6	2		53,24	061						
6	2,0	4	5,6	14	54	6	2		53,24	062						
6	0,5	4	5,6	45	85	6	2					74,62	066			
6	1,0	4	5,6	45	85	6	2					100,40	067			
6	2,0	4	5,6	45	85	6	2					74,62	068			
6	0,5	4	5,6	25	100	6	2								86,62	069
6	1,0	4	5,6	25	100	6	2								86,62	070
6	2,0	4	5,6	25	100	6	2								86,62	071
6	0,5	4	5,6	25	85	8	2					100,40	063			
6	1,0	4	5,6	25	85	8	2					74,62	064			
6	2,0	4	5,6	25	85	8	2					100,40	065			
8	0,5	4	7,6	16	58	8	2		65,02	080						
8	1,0	4	7,6	16	58	8	2		65,02	081						
8	2,0	4	7,6	16	58	8	2		65,02	082						

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals	○	○	○
Heat resistant alloys	○	○	○
hardened materials	○	○	○

→ v_c/f_z Page 350–356

Continued on next page

Torus cutter

H | λ_s=30° γ_s= 3° | ZEFP | ≤ 68 HRC

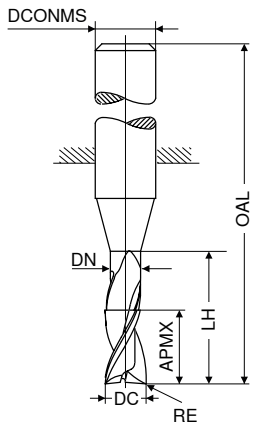

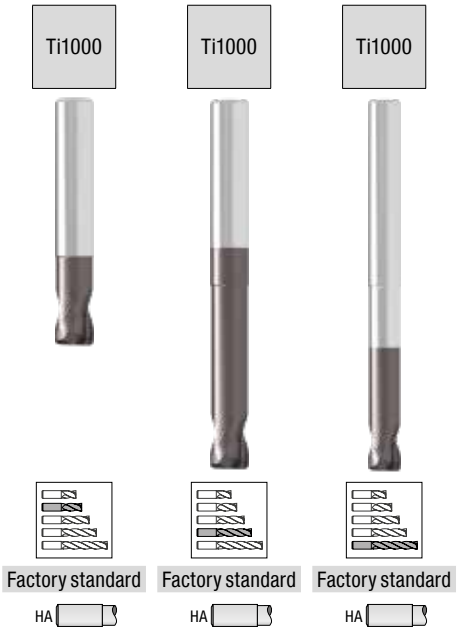

DC f8	RE ±0,01	APMX	DN	LH	OAL	DCONMS h5	ZEFP	V0 Article no. 50 651 ...		V0 Article no. 50 651 ...		V0 Article no. 50 651 ...	
mm	mm	mm	mm	mm	mm	mm		EUR		EUR		EUR	
8	0,5	4	7,6	50	100	8	2					138,80	083
8	2,0	4	7,6	50	100	8	2					101,00	084
8	1,0	4	7,6	30	100	10	2					138,80	085
8	2,0	4	7,6	30	100	10	2					136,80	086
10	1,0	6	9,6	18	66	10	2	80,89	100				
10	3,0	6	9,6	18	66	10	2	80,89	101				
10	1,0	6	9,6	50	100	10	2			137,80	102		
10	2,0	6	9,6	50	100	10	2			80,89	103		
10	3,0	6	9,6	50	100	10	2			137,80	104		
10	1,0	6	9,6	60	120	10	2					165,40	105
10	2,0	6	9,6	60	120	10	2					137,80	106
10	3,0	6	9,6	60	120	10	2					169,70	107
10	1,0	6	9,6	30	120	12	2					213,80	108
10	2,0	6	9,6	30	120	12	2					213,80	109
10	3,0	6	9,6	30	120	12	2					213,80	110
12	1,0	8	11,5	18	73	12	2	119,10	120				
12	2,0	8	11,5	18	73	12	2	119,10	121				
12	3,0	8	11,5	18	73	12	2	119,10	122				
12	4,0	8	11,5	18	73	12	2	119,10	123				
12	1,0	8	11,5	45	100	12	2			177,50	124		
12	2,0	8	11,5	45	100	12	2			177,50	125		
12	3,0	8	11,5	45	100	12	2			177,50	126		
12	4,0	8	11,5	45	100	12	2			177,50	127		
12	1,0	8	11,5	70	120	12	2					213,80	128
12	2,0	8	11,5	70	120	12	2					213,80	129
12	3,0	8	11,5	70	120	12	2					213,80	130
12	4,0	8	11,5	70	120	12	2					213,80	131
12	1,0	8	11,5	35	150	16	2					432,10	132
12	2,0	8	11,5	35	150	16	2					432,10	133
12	3,0	8	11,5	35	150	16	2					432,10	134
12	4,0	8	11,5	35	150	16	2					432,10	135

Steel	●	●	●
Stainless steel	○	○	○
Cast iron	●	●	●
Non ferrous metals	○	○	○
Heat resistant alloys	○	○	○
hardened materials	○	○	○

→ v_c/f_z Page 350–356

Torus cutter

- ▲ Radius accuracy: ±0.005 mm
- ▲ High-performance tool for clearing
- ▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ±0.5°

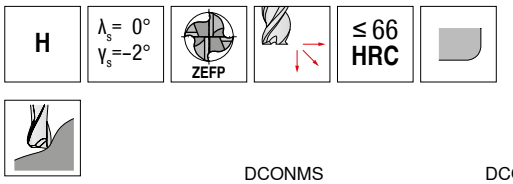

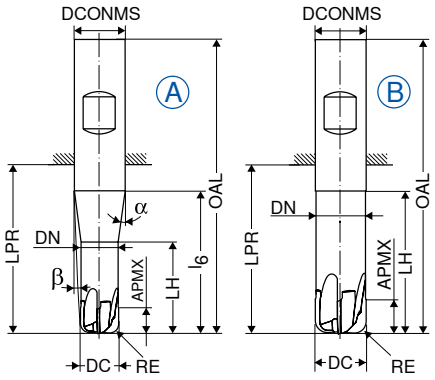

LPR with Shank DIN 6535 HB

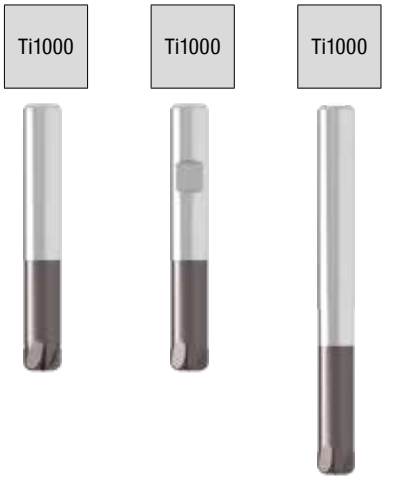



Factory standard | Factory standard | Factory standard

HA | HB | HA

DC ±0.01	RE ±0.005	APMX	DN	LH	l6	LPR	OAL	α°	β°	DCONMS h5	ZEFP	Fig.	V1 Article no. 52 732 ...		V1 Article no. 52 733 ...		V1 Article no. 52 732 ...	
mm	mm	mm	mm	mm	mm	mm	mm			mm			EUR		EUR		EUR	
3	0,75	2,0	2,8	10	20	21	57	11,5	5,0	6	4	A	97,09	033	97,09	033		
4	1,00	2,5	3,8	12	20	21	57	11,0	3,5	6	4	A	97,09	044	97,09	044		
5	1,25	3,0	4,7	14	20	21	57	10,0	2,0	6	4	A	100,20	055	100,20	055		
6	1,50	4,0	5,6	20		21	57			6	4	B	101,40	065	101,40	065		
6	1,50	4,0	5,6	30		44	80			6	4	B					94,90	066
8	1,00	5,0	7,6	25		27	63			8	4	B	127,80	084				
8	1,00	5,0	7,6	35		44	80			8	4	B					129,00	085
8	2,00	5,0	7,6	25		27	63			8	4	B	140,00	086	140,00	086		
8	2,00	5,0	7,6	35		44	80			8	4	B					129,00	087
10	1,00	6,0	9,6	30		32	72			10	4	B	145,50	104				
10	1,00	6,0	9,6	30		32	72			10	6	B	162,00	105				
10	1,00	6,0	9,6	45		60	100			10	4	B					162,00	106
10	1,00	6,0	9,6	45		60	100			10	6	B					184,10	110
10	2,50	6,0	9,6	30		32	72			10	4	B	159,90	107	159,90	107		
10	2,50	6,0	9,6	30		32	72			10	6	B	162,00	108				
10	2,50	6,0	9,6	45		60	100			10	4	B					164,20	109
10	2,50	6,0	9,6	45		60	100			10	6	B					184,10	111
12	1,00	7,0	11,5	35		38	83			12	4	B	187,30	124				
12	1,00	7,0	11,5	35		38	83			12	8	B	228,10	125				
12	1,00	7,0	11,5	50		55	100			12	4	B					205,00	130
12	1,00	7,0	11,5	50		55	100			12	8	B					256,80	132
12	3,00	7,0	11,5	35		38	83			12	4	B	203,80	128	203,80	128		
12	3,00	7,0	11,5	35		38	83			12	8	B	228,10	129				
12	3,00	7,0	11,5	50		55	100			12	4	B					205,00	131
12	3,00	7,0	11,5	50		55	100			12	8	B					256,80	133
16	4,00	8,0	15,5	40		44	92			16	4	B	307,50	169	307,50	169		
16	4,00	8,0	15,5	60		72	120			16	4	B					299,80	170
16	4,00	8,0	15,5	60		72	120			16	8	B					359,30	171

Steel	●	●	●
Stainless steel			
Cast iron	○	○	○
Non ferrous metals	○	○	○
Heat resistant alloys			
hardened materials	●	●	●

→ v_c/f_z Page 350–356

Intermediate size torus cutter

▲ reduced shank Ø for flexible application in various overhang lengths

H | λ_s=45° γ_s=12° | ZEFP | ≤ 56 HRC | Ti1000

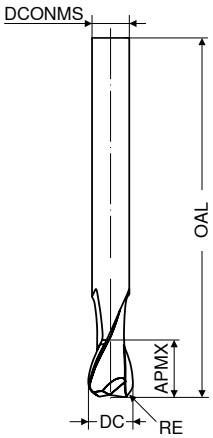

Factory standard

HA

DC e8	RE ±0,01	APMX	OAL	DCONMS h6	ZEFP	V1 Article no. 52 107 ...	
mm	mm	mm	mm	mm		EUR	
7	0,5	9	120	6	4	120,10	075
7	1,0	9	120	6	4	120,10	076
7	1,5	9	120	6	4	120,10	077
9	0,5	12	135	8	4	155,50	095
9	1,0	12	135	8	4	155,50	096
9	1,5	12	135	8	4	155,50	097
11	1,0	15	150	10	4	200,60	115
11	1,5	15	150	10	4	200,60	116
11	2,0	15	150	10	4	200,60	117
13	1,0	18	160	12	4	256,80	135
13	1,5	18	160	12	4	256,80	136
13	2,0	18	160	12	4	256,80	137
15	1,0	21	160	14	4	292,00	156
15	1,5	21	160	14	4	292,00	157
15	2,0	21	160	14	4	292,00	158
17	1,0	24	180	16	4	349,30	176
17	1,5	24	180	16	4	349,30	177
17	2,0	24	180	16	4	349,30	178
17	3,0	24	180	16	4	349,30	179

Steel	○
Stainless steel	●
Cast iron	○
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	○

→ v_c/f_z Page 350–356

High feed cutter

- ▲ APMX does not correspond to the maximum cutting depth
- ▲ for feed per tooth (f_z) up to 1 mm
- ▲ roughing in large depths
- ▲ extremely quiet running
- ▲ r_{3D} = corner radius to be programmed

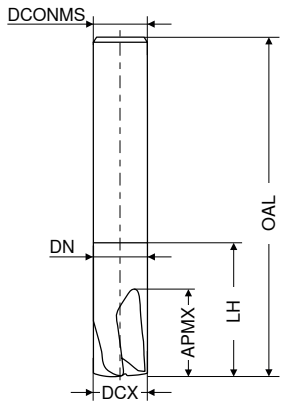

Factory standard

V1

DCX h6 mm	r_{3D} mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 56 900 ...	
								EUR	
6	0,50	6	5,8	21	57	6	4	86,07	060
8	0,70	8	7,8	27	63	8	4	108,40	080
10	0,85	10	9,8	32	72	10	4	122,30	100
12	1,00	12	11,8	38	83	12	4	156,50	120
16	1,40	16	15,8	50	92	16	4	233,60	160

Steel	●
Stainless steel	○
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	●

→ v_c/f_z Page 346+347

14

High feed cutter

- ▲ APMX does not correspond to the maximum cutting depth
- ▲ for feed per tooth (f_z) up to 1 mm
- ▲ roughing in large depths
- ▲ extremely quiet running
- ▲ r_{3D} = corner radius to be programmed

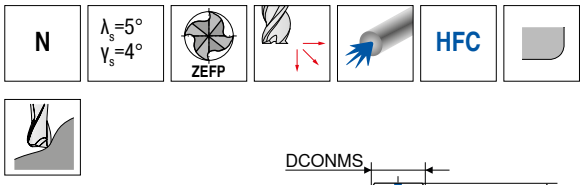

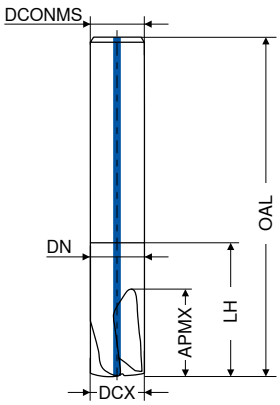

Factory standard | Factory standard

HA | HA

DCX h6 mm	r_{3D} mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	V1 Article no. 56 902 ... EUR		V1 Article no. 56 904 ... EUR	
6	0,50	6	5,8	21	57	6	4	90,49	060		
6	0,50	6	5,8	64	100	6	4			101,10	060
8	0,70	8	7,8	27	63	8	4	112,40	080		
8	0,70	8	7,8	64	100	8	4			127,80	080
10	0,85	10	9,8	32	72	10	4	143,30	100		
10	0,85	10	9,8	60	100	10	4			158,70	100
12	1,00	12	11,8	38	83	12	4	180,80	120		
12	1,00	12	11,8	65	110	12	4			206,10	120
16	1,40	16	15,8	50	92	16	4	337,30	160		
16	1,40	16	15,8	65	150	16	4			361,50	160

Steel	●	●
Stainless steel	○	○
Cast iron	○	○
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	●	●

→ v_c/f_z Page 346+347

Engraving cutter 60°



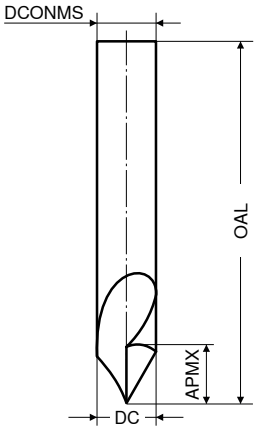

Factory standard

HA

V1

DC h6 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 195 ...	EUR
3	15	50	3	1	030	38,91
4	18	50	4	1	040	41,43
6	20	54	6	1	060	44,53

Steel	○
Stainless steel	○
Cast iron	○
Non ferrous metals	●
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 350–353

14

NC deburring cutter

N | λ_s=0° γ_s=0°

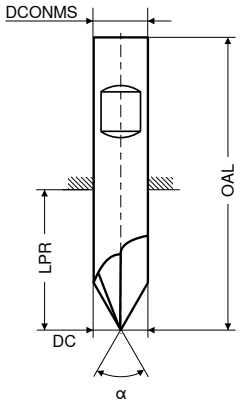

Ti1000 | Ti1000 | Ti1000

DC h6	OAL	LPR	DCONMS h6	ZEFP	α = 60° Factory standard HB V1 Article no. 52 150 ... EUR		α = 60° Factory standard HB V1 Article no. 52 153 ... EUR		α = 90° Factory standard HB V1 Article no. 52 151 ... EUR		α = 90° Factory standard HB V1 Article no. 52 154 ... EUR		α = 120° Factory standard HB V1 Article no. 52 152 ... EUR		α = 120° Factory standard HB V1 Article no. 52 155 ... EUR	
mm	mm	mm	mm													
4	50	22	4	4	26,33	040 [1]	35,38	040 [1]	26,33	040 [1]	35,38	040 [1]	26,33	040 [1]	35,38	040 [1]
6	54	18	6	4	33,96	060 [2]	47,16	060	33,96	060 [2]	47,16	060	33,96	060 [2]	47,16	060
8	59	23	8	4	40,11	080 [2]	57,53	080	40,11	080 [2]	57,53	080	40,11	080 [2]	57,53	080
10	60	20	10	4	49,60	100 [2]	70,10	100	49,60	100 [2]	70,10	100	49,60	100 [2]	70,10	100
12	70	25	12	4	69,76	120 [2]	95,34	120	69,76	120 [2]	95,34	120	69,76	120 [2]	95,34	120
Steel					●		●		●		●		●		●	
Stainless steel					○		○		○		○		○		○	
Cast iron					●		●		●		●		●		●	
Non ferrous metals					○		○		○		○		○		○	
Heat resistant alloys					○		○		○		○		○		○	
hardened materials							○				○				○	

1) DIN 6535 HA Shank
2) included in the set

→ v_c/f_z Page 350–353

Solid carbide NC deburring cutter set, factory standard

▲ Sets contain Ø 6, Ø 8, Ø 10 and Ø 12 mm

	α = 60° HB V1 Article no. 52 150 ... EUR		α = 90° HB V1 Article no. 52 151 ... EUR		α = 120° HB V1 Article no. 52 152 ... EUR	
Set	195,10	999	195,10	999	195,10	999

NC deburring cutter

N

λ_s=0°
γ_s=0°

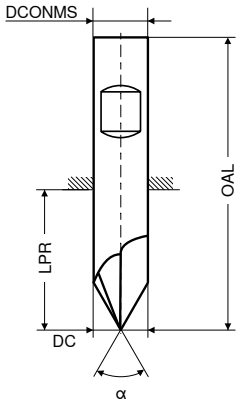

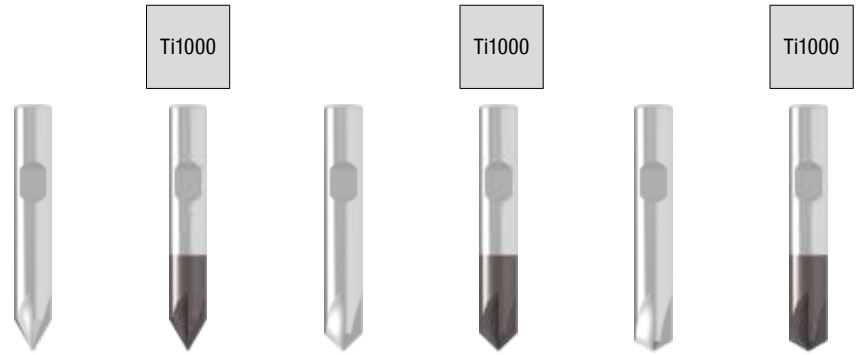

DC h6	OAL	LPR	DCONMS h6	ZEFP	α = 60° Factory standard HB V0 Article no. 50 940 ... EUR		α = 60° Factory standard HB V0 Article no. 50 943 ... EUR		α = 90° Factory standard HB V0 Article no. 50 941 ... EUR		α = 90° Factory standard HB V0 Article no. 50 944 ... EUR		α = 120° Factory standard HB V0 Article no. 50 942 ... EUR		α = 120° Factory standard HB V0 Article no. 50 945 ... EUR	
mm	mm	mm	mm													
4	54	26	4	4	24,69	040 [1]	32,96	040 [1]	24,69	040 [1]	32,96	040 [1]	24,69	040 [1]	32,96	040 [1]
6	54	18	6	4	32,07	060	44,53	060	32,07	060	44,53	060	32,07	060	44,53	060
8	58	22	8	4	37,80	080	54,01	080	37,80	080	54,01	080	37,80	080	54,01	080
10	66	26	10	4	46,61	100	65,69	100	46,61	100	65,69	100	46,61	100	65,69	100
12	73	28	12	4	65,24	120	89,17	120	65,24	120	89,17	120	65,24	120	89,17	120

Steel	●	●	●	●	●	●
Stainless steel	○	○	○	○	○	○
Cast iron	●	●	●	●	●	●
Non ferrous metals	○	○	○	○	○	○
Heat resistant alloys	○	○	○	○	○	○
hardened materials		○		○		○

1) DIN 6535 HA Shank

→ v_c/f_z Page 350–353

14

NC front and rear chamfer milling cutter



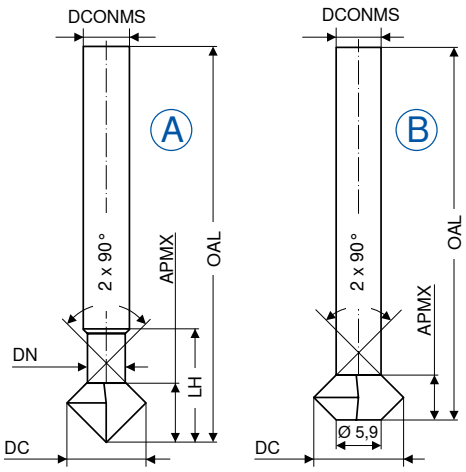

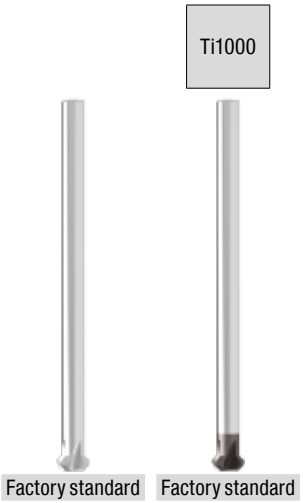

DC mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	Fig.	V1 Article no. 52 158 ... EUR		V1 Article no. 52 159 ... EUR	
3	2,0	2,2	12,0	75	4	4	A	53,89	**030**	60,94	**030**
4	2,7	2,9	17,7	75	4	4	A	53,89	**040**	62,05	**040**
5	3,0	3,9	18,0	75	5	4	A	55,21	**050**	63,26	**050**
6	4,0	3,9	19,0	100	6	4	A	67,34	**060**	75,61	**060**
8	2,0			100	6	4	B	87,72	**080**	98,09	**080**
10	4,0			100	6	4	B	109,30	**100**	122,30	**100**
12	6,0			100	6	4	B	131,30	**120**	145,50	**120**

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials		○

→ v_c/f_z Page 350–353

Quarter-round profile milling cutter, concave



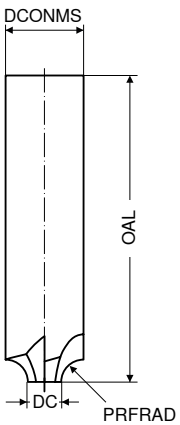



Factory standard

HA

V1

PRFRAD +/-0,02 mm	DC mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 249 ... EUR	
0,50	7,0	70	8	4	117,90	005
1,00	6,0	70	8	4	117,90	010
1,25	7,5	75	10	4	129,00	012
1,50	7,0	75	10	4	125,70	015
2,00	6,0	75	10	4	125,70	020
2,50	7,0	73	12	4	140,00	025
3,00	6,0	73	12	4	140,00	030
3,50	9,0	80	16	4	176,30	035
4,00	8,0	80	16	4	176,30	040
4,50	7,0	80	16	4	176,30	045
5,00	10,0	80	20	4	251,30	050
6,00	8,0	80	20	4	251,30	060

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	○

→ v_c/f_z Page 350–353

Die milling cutter



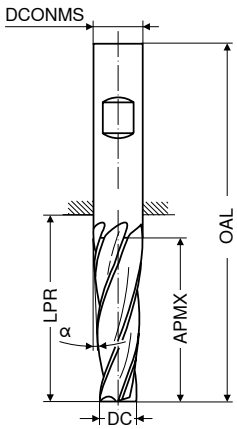

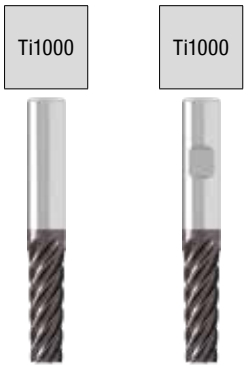

DC ±0,1 mm	α°	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Factory standard HA V1 Article no. 52 291 ...	EUR	Factory standard HB V1 Article no. 52 291 ...	EUR
2,0	0,5	10	22	50	3	4	000	80,46		
2,5	0,5	10	22	50	3	4	001	77,37		
2,5	0,5	20	32	60	4	4	002	102,00		
3,0	0,5	20	32	60	4	4	003	104,70		
4,0	0,5	20	32	60	5	4	004	107,60		
5,0	0,5	30	34	75	6	6			005	121,30
6,0	0,5	30	35	75	8	6			006	123,50
8,0	0,5	30	35	80	10	6			007	130,00
10,0	0,5	30	36	85	12	6			008	149,90
12,0	0,5	30	36	85	14	6			009	189,60
12,0	0,5	50	57	110	14	6			010	201,80
16,0	0,5	60	72	120	18	6			011	295,40
2,0	1	10	22	50	3	4	100	80,46		
2,5	1	10	22	50	3	4	101	77,37		
2,5	1	20	32	60	4	4	102	102,00		
3,0	1	20	32	60	4	4	103	104,70		
3,5	1	20	32	60	5	4	104	107,60		
4,0	1	20	32	60	5	4	105	107,60		
4,5	1	20	29	65	6	6			106	109,30
5,0	1	25	29	70	6	6			107	121,30
6,0	1	30	36	75	8	6			108	121,30
8,0	1	30	36	80	10	6			109	130,00
10,0	1	30	36	85	12	6			110	149,90
12,0	1	30	36	85	14	6			111	189,60
12,0	1	50	55	110	14	6			112	201,80
16,0	1	55	61	115	18	6			113	295,40
2,0	1,5	10	22	50	3	4	200	80,46		
2,5	1,5	10	22	50	4	4	201	88,39		
2,5	1,5	20	32	60	4	4	202	102,00		
3,0	1,5	20	32	60	4	4	203	104,70		
3,5	1,5	20	32	60	5	4	204	107,60		
4,0	1,5	20	32	60	5	4	205	107,60		
4,5	1,5	20	25	65	6	4			206	109,30
5,0	1,5	30	36	75	8	6			207	121,30
6,0	1,5	30	36	75	8	6			208	121,30
8,0	1,5	30	36	80	10	6			209	130,00
10,0	1,5	30	36	85	12	6			210	149,90
12,0	1,5	30	36	85	14	6			211	189,60
12,0	1,5	50	56	110	16	6			212	218,30
16,0	1,5	60	68	125	20	6			213	332,80
2,0	2	10	22	50	3	4	301	80,46		
2,5	2	10	22	50	4	4	302	88,39		
2,5	2	20	32	60	4	4	303	102,00		
3,0	2	20	32	60	5	4	304	107,60		
3,5	2	20	32	60	5	4	305	107,60		
4,0	2	20	27	65	6	4			306	109,30
4,5	2	30	37	75	8	4			307	121,30
5,0	2	30	37	75	8	6			308	121,30
6,0	2	28	32	75	8	6			309	121,30
8,0	2	28	33	75	10	6			310	130,00
10,0	2	28	33	85	12	6			311	149,90
12,0	2	28	33	85	14	6			312	189,60
12,0	2	50	56	110	16	6			313	207,30

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–353

Continued on next page

Die milling cutter



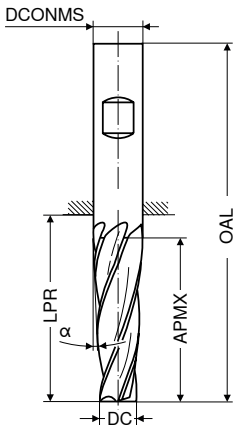

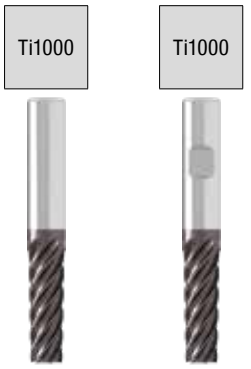

DC ±0,1 mm	α°	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Factory standard HA V1 Article no. 52 291 ...	EUR	Factory standard HB V1 Article no. 52 291 ...	EUR
16,0	2	55	62	115	20	6			325,10	314
2,0	2,5	15	22	50	4	4	89,94	401		
2,5	2,5	20	32	60	5	4	103,70	402		
3,0	2,5	20	32	60	5	4	107,60	403		
4,0	2,5	20	26	65	6	4			109,30	404
5,0	2,5	30	35	75	8	6			121,30	405
6,0	2,5	30	36	80	10	6			121,30	406
8,0	2,5	30	36	85	12	6			149,90	407
10,0	2,5	40	46	100	14	6			189,60	408
2,0	3	10	22	50	4	4	89,94	500		
2,5	3	10	22	50	4	4	91,81	501		
2,5	3	20	27	65	6	4			108,10	502
3,0	3	25	32	70	6	4			109,30	503
3,0	3	30	38	75	8	4			121,30	504
3,0	3	40	47	85	8	4			130,00	505
4,0	3	25	30	70	8	6			115,80	506
4,0	3	30	35	75	8	6			120,10	507
5,0	3	40	46	90	10	6			149,90	508
6,0	3	30	36	80	10	6			130,00	509
8,0	3	30	36	85	12	6			149,90	510
8,0	3	50	57	110	14	6			196,30	511
10,0	3	30	36	85	14	6			189,60	512
10,0	3	50	57	110	16	6			227,00	513
12,0	3	30	38	90	16	6			206,10	514
12,0	3	50	57	110	18	6			285,50	515
2,5	4	25	30	65	6	4			115,80	601
3,0	4	20	26	65	6	4			115,80	602
3,5	4	25	32	70	8	4			126,80	603
4,0	4	28	33	70	8	6			138,80	604
5,0	4	30	36	85	10	6			143,30	605
5,0	4	45	51	100	12	6			164,20	606
6,0	4	30	38	84	12	6			161,00	607
6,0	4	50	58	110	14	6			205,00	608
8,0	4	30	38	84	14	6			199,50	609
8,0	4	50	58	110	16	6			240,20	610
10,0	4	30	39	93	16	6			221,50	611
10,0	4	50	58	114	18	6			305,30	612
2,5	5	20	25	65	6	4			115,80	701
3,0	5	28	34	70	8	4			126,80	702
3,5	5	30	38	80	10	4			140,00	703
4,0	5	30	36	80	10	6			140,00	704
4,5	5	30	36	80	10	6			140,00	705
5,0	5	30	38	84	12	6			164,20	706
5,0	5	40	46	100	12	6			166,50	707
6,0	5	30	36	93	12	6			164,20	708
6,0	5	55	62	110	16	6			240,20	709
8,0	5	30	38	90	14	6			201,80	710
8,0	5	50	58	114	18	6			305,30	711
10,0	5	30	38	93	16	6			221,50	712
10,0	5	55	63	115	20	6			332,80	713
12,0	5	30	38	93	18	6			233,60	714
12,0	5	45	52	100	20	6			325,10	715

Steel	●	●
Stainless steel	○	○
Cast iron	●	●
Non ferrous metals	○	○
Heat resistant alloys	○	○
hardened materials	○	○

→ v_c/f_z Page 350–353

14

Carbide burrs, similar to DIN 8033

Teeth **Z3**: Application "medium"

Teeth **Z6**: Application "medium"

v_c in m/min = 300–600

KSJ



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	U9 Article no. 50 928 ...		U9 Article no. 50 928 ...	
mm	mm	mm	mm		EUR		EUR	
6	5	52	6	60°	11,36	606	12,56	706
12	10	60	6	60°	15,32	612 [1]	16,86	712 [1]

1) Steel shank / carbide head – shank tolerance h9

KSK



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	U9 Article no. 50 927 ...		U9 Article no. 50 927 ...	
mm	mm	mm	mm		EUR		EUR	
6	3	52	6	90°	10,86	606	12,01	706
12	6	56	6	90°	13,23	612 [1]	14,65	712 [1]

1) Steel shank / carbide head – shank tolerance h9

ZYA



Z3

Z6

DC	APMX	OAL	DCONMS	U9 Article no. 50 921 ...		U9 Article no. 50 921 ...	
mm	mm	mm	mm	EUR		EUR	
3	13	40	3	5,45	303	5,99	403
6	13	48	3	9,92	306 [1]	10,86	406 [1]
6	16	55	6	11,24	606	12,34	706
8	20	65	6	14,33	608 [1]	15,76	708 [1]
10	20	65	6	16,31	610 [1]	17,63	710 [1]
12	25	70	6	20,94	612 [1]	23,04	712 [2]

1) Steel shank / carbide head – shank tolerance h9
2) Steel shank / carbide head – shank tolerance h7

WRC



Z3

Z6

DC	APMX	OAL	DCONMS	U9 Article no. 50 922 ...		U9 Article no. 50 922 ...	
mm	mm	mm	mm	EUR		EUR	
3	13	40	3	6,86	303	7,56	403
6	13	48	3	11,13	306 [1]	12,34	406 [1]
6	16	50	6	12,56	606	13,88	706
8	18	63	6	15,98	608 [1]	17,63	708 [1]
10	20	65	6	18,51	610 [1]	20,28	710 [1]
12	25	70	6	25,13	612 [1]	27,66	712 [1]
16	25	70	6	33,51	616 [1]	36,81	716 [1]

1) Steel shank / carbide head – shank tolerance h9

SKM



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	U9 Article no. 50 926 ...		U9 Article no. 50 926 ...	
mm	mm	mm	mm		EUR		EUR	
3	11	40	3	14°	6,65	303	7,27	403
6	13	48	3	23°	9,32	306 [1]	10,19	406 [1]
6	18	50	6	16°	11,79	606	12,90	706
8	20	65	6	20°	11,13	608 [1]	12,34	708 [1]
10	20	65	6	25°	13,23	610 [1]	14,65	710 [1]
12	25	70	6	25°	18,18	612 [1]	19,83	712 [1]

1) Steel shank / carbide head – shank tolerance h9

KEL



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	U9 Article no. 50 923 ...		U9 Article no. 50 923 ...	
mm	mm	mm	mm		EUR		EUR	
3	14	40	3	6°	6,65	303	7,27	403
6	20	55	3	12°	11,36	306 [1]	12,56	406 [1]
6	20	50	6	10°	12,56	606	13,88	706
8	20	65	6	14°	17,86	608 [1]	19,62	708 [1]
10	20	65	6	14°	22,15	610 [1]	24,14	710 [1]
12	30	75	6	14°	26,56	612 [1]	28,98	712 [1]

1) Steel shank / carbide head – shank tolerance h9

Carbide burrs, similar to DIN 8033

Teeth **Z3**: Application "medium"

Teeth **Z6**: Application "medium"

v_c in m/min = 300–600

SPG



Z3

Z6

DC	APMX	OAL	DCONMS	U9 Article no. 50 925 ...		U9 Article no. 50 925 ...	
mm	mm	mm	mm	EUR		EUR	
3	13	40	3	6,43	303	7,04	403
6	13	48	3	9,61	306 1)	10,58	406 1)
6	18	50	6	14,23	606	15,54	706
8	20	65	6	14,33	608 1)	15,76	708 1)
10	20	65	6	17,86	610 1)	19,62	710 1)
12	25	70	6	20,94	612 2)	23,15	712 1)

1) Steel shank / carbide head – shank tolerance h9
2) Steel shank / carbide head – shank tolerance h7

RBF



Z3

Z6

DC	APMX	OAL	DCONMS	U9 Article no. 50 924 ...		U9 Article no. 50 924 ...	
mm	mm	mm	mm	EUR		EUR	
3	13	40	3	6,65	303	7,27	403
6	13	48	3	10,58	306 1)	11,68	406 1)
6	18	50	6	14,65	606	16,31	706
8	20	65	6	15,65	608 1)	17,31	708 1)
10	20	65	6	18,18	610 1)	19,95	710 1)
12	25	70	6	22,05	612 1)	24,02	712 1)
16	30	75	6	31,41	616 1)	34,50	716 1)

1) Steel shank / carbide head – shank tolerance h9

TRE



Z3

Z6

DC	APMX	OAL	DCONMS	U9 Article no. 50 929 ...		U9 Article no. 50 929 ...	
mm	mm	mm	mm	EUR		EUR	
3	7	40	3	6,65	303	7,27	403
6	10	45	3	9,89	306 1)	10,77	406 1)
6	10	50	6	13,33	606	14,77	706
8	13	58	6	14,88	608 1)	16,42	708 1)
10	16	61	6	16,97	610 1)	18,73	710 1)
12	20	65	6	21,38	612 1)	23,36	712 1)

1) Steel shank / carbide head – shank tolerance h9

KUD



Z3

Z6

DC	APMX	OAL	DCONMS	U9 Article no. 50 930 ...		U9 Article no. 50 930 ...	
mm	mm	mm	mm	EUR		EUR	
3	2,7	40,0	3	6,65	303	7,27	403
6	5,4	40,4	3	8,93	306 1)	9,89	406 1)
6	5,0	50,0	6	12,90	606	14,33	706
8	7,2	52,2	6	12,34	608 1)	13,33	708 1)
10	9,0	54,0	6	14,44	610 1)	15,76	710 1)
12	10,8	55,8	6	17,31	612 1)	19,18	712 1)
16	14,4	59,4	6	24,69	616 1)	27,11	716 1)

1) Steel shank / carbide head – shank tolerance h9

WKN



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	U9 Article no. 50 931 ...		U9 Article no. 50 931 ...	
mm	mm	mm	mm		EUR		EUR	
3	7	40	3	10°	6,65	303	7,27	403
6	7	50	6	10°	12,34	606	13,45	706
12	13	58	6	20°	16,54	612 1)	18,18	712 1)

1) Steel shank / carbide head – shank tolerance h9

14

Circular saw blades

▲ straight cut





DIN 1837 A

DC js16	OAH ±0,01	DCONMS H6	ZEFP	NEW V6 Article no. 54 700 ... EUR	
mm	mm	mm			
15	0,20	5	64	14,44	102
15	0,25	5	64	14,44	103
15	0,30	5	64	14,44	104
15	0,35	5	64	14,44	105
15	0,40	5	64	14,44	106
15	0,50	5	48	14,44	107
15	0,60	5	48	14,44	108
15	0,70	5	48	17,20	109
15	0,80	5	40	17,20	110
15	0,90	5	40	17,63	111
15	1,00	5	40	18,30	112
15	1,10	5	40	19,07	113
15	1,20	5	40	19,07	114
15	1,30	5	40	19,07	115
15	1,40	5	40	19,07	116
15	1,50	5	40	20,73	117
15	1,60	5	40	22,26	118
15	1,70	5	40	24,14	119
15	1,80	5	40	24,14	120
15	1,90	5	40	25,13	121
15	2,00	5	40	25,46	122
15	2,50	5	40	35,16	123
15	3,00	5	40	39,79	124
15	3,50	5	40	44,97	125
15	4,00	5	40	55,44	126
15	4,50	5	40	65,02	127
15	5,00	5	40	67,67	128
15	5,50	5	40	80,79	129
15	6,00	5	40	83,21	130
20	0,20	5	80	15,65	152
20	0,25	5	64	15,65	153
20	0,30	5	64	15,65	154
20	0,35	5	64	15,65	155
20	0,40	5	64	15,65	156
20	0,50	5	48	15,65	157
20	0,60	5	48	15,65	158
20	0,70	5	48	18,30	159
20	0,80	5	48	18,30	160
20	0,90	5	40	19,07	161
20	1,00	5	40	20,73	162
20	1,10	5	40	22,26	163
20	1,20	5	40	22,26	164
20	1,30	5	40	23,47	165
20	1,40	5	40	25,46	166
20	1,50	5	40	25,46	167
20	1,60	5	40	26,68	168
20	1,70	5	40	28,10	169
20	1,80	5	32	28,10	170
20	1,90	5	32	29,43	171
20	2,00	5	32	29,43	172
20	2,50	5	32	37,14	173
20	3,00	5	32	42,33	174
20	3,50	5	24	47,61	175
20	4,00	5	24	56,66	176

DC js16	OAH ±0,01	DCONMS H6	ZEFP	NEW V6 Article no. 54 700 ... EUR	
mm	mm	mm			
20	4,50	5	24	67,67	177
20	5,00	5	24	70,42	178
20	5,50	5	24	81,89	179
20	6,00	5	24	84,54	180
25	0,20	8	80	15,43	202
25	0,25	8	80	15,43	203
25	0,30	8	80	15,43	204
25	0,35	8	64	15,43	205
25	0,40	8	64	15,43	206
25	0,50	8	64	17,96	207
25	0,60	8	64	17,96	208
25	0,70	8	48	19,95	209
25	0,80	8	48	22,26	210
25	0,90	8	48	24,14	211
25	1,00	8	48	24,14	212
25	1,10	8	48	27,78	213
25	1,20	8	48	27,78	214
25	1,30	8	40	28,98	215
25	1,40	8	40	30,20	216
25	1,50	8	40	30,20	217
25	1,60	8	40	33,28	218
25	1,70	8	40	33,28	219
25	1,80	8	40	34,61	220
25	1,90	8	40	37,03	221
25	2,00	8	40	38,14	222
25	2,50	8	40	46,29	223
25	3,00	8	32	60,29	224
25	3,50	8	32	66,47	225
25	4,00	8	32	75,06	226
25	4,50	8	32	85,97	227
25	5,00	8	32	90,82	228
25	5,50	8	24	103,40	229
25	6,00	8	24	108,30	230
30	0,20	8	100	19,95	252
30	0,25	8	100	19,95	253
30	0,30	8	80	19,95	254
30	0,35	8	80	19,95	255
30	0,40	8	80	19,95	256
30	0,50	8	80	20,94	257
30	0,60	8	64	20,94	258
30	0,70	8	64	25,36	259
30	0,80	8	64	27,78	260
30	0,90	8	64	30,20	261
30	1,00	8	64	30,20	262
30	1,10	8	64	33,96	263
30	1,20	8	48	33,40	264
30	1,30	8	48	34,50	265
30	1,40	8	48	37,59	266
30	1,50	8	48	37,59	267
30	1,60	8	48	40,01	268
30	1,70	8	48	40,01	269
30	1,80	8	48	41,11	270
30	1,90	8	48	42,33	271
30	2,00	8	48	44,97	272
30	2,50	8	40	52,79	273
30	3,00	8	40	62,82	274
30	3,50	8	40	71,31	275
30	4,00	8	40	80,02	276
30	4,50	8	32	92,25	277
30	5,00	8	32	97,22	278
30	5,50	8	32	109,50	279
30	6,00	8	32	114,60	280

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	○

→ v_c/f_z Page 349

Circular saw blades

▲ straight cut





DIN 1837 A

DC js16	OAH ±0,01	DCONMS H6	ZEFP	NEW V6 Article no. 54 700 ... EUR	
mm	mm	mm			
40	0,20	10	128	24,46	302
40	0,25	10	100	24,46	303
40	0,30	10	100	24,46	304
40	0,35	10	100	24,46	305
40	0,40	10	100	25,91	306
40	0,50	10	80	28,22	307
40	0,60	10	80	28,22	308
40	0,70	10	80	32,29	309
40	0,80	10	80	33,61	310
40	0,90	10	64	33,61	311
40	1,00	10	64	34,72	312
40	1,10	10	64	35,82	313
40	1,20	10	64	37,14	314
40	1,30	10	64	37,80	315
40	1,40	10	64	40,23	316
40	1,50	10	64	41,43	317
40	1,60	10	64	42,43	318
40	1,70	10	48	44,97	319
40	1,80	10	48	46,06	320
40	1,90	10	48	47,39	321
40	2,00	10	48	47,39	322
40	2,50	10	48	60,94	323
40	3,00	10	48	70,54	324
40	3,50	10	48	78,80	325
40	4,00	10	40	87,40	326
40	4,50	10	40	99,20	327
40	5,00	10	40	105,30	328
40	5,50	10	40	117,90	329
40	6,00	10	40	124,60	330
50	0,20	13	128	40,23	352
50	0,25	13	128	38,91	353
50	0,30	13	128	33,06	354
50	0,35	13	100	33,06	355
50	0,40	13	100	33,06	356
50	0,50	13	100	34,16	357
50	0,60	13	100	34,16	358
50	0,70	13	80	35,82	359
50	0,80	13	80	38,91	360
50	0,90	13	80	40,23	361
50	1,00	13	80	41,43	362
50	1,10	13	80	42,43	363
50	1,20	13	80	43,75	364
50	1,30	13	64	49,05	365
50	1,40	13	64	50,14	366
50	1,50	13	64	52,69	367
50	1,60	13	64	53,79	368
50	1,70	13	64	54,56	369
50	1,80	13	64	58,08	370
50	1,90	13	64	58,08	371
50	2,00	13	64	59,84	372
50	2,50	13	64	73,07	373
50	3,00	13	48	84,86	374
50	3,50	13	48	96,88	375
50	4,00	13	48	102,80	376

DC js16	OAH ±0,01	DCONMS H6	ZEFP	NEW V6 Article no. 54 700 ... EUR	
mm	mm	mm			
50	4,50	13	48	119,10	377
50	5,00	13	48	125,70	378
50	5,50	13	40	140,00	379
50	6,00	13	40	145,50	380
63	0,20	16	160	59,07	402
63	0,25	16	160	56,87	403
63	0,30	16	128	52,90	404
63	0,35	16	128	50,03	405
63	0,40	16	128	45,30	406
63	0,50	16	128	44,19	407
63	0,60	16	100	45,30	408
63	0,70	16	100	51,03	409
63	0,80	16	100	56,21	410
63	0,90	16	100	56,87	411
63	1,00	16	100	57,97	412
63	1,10	16	80	60,29	413
63	1,20	16	80	62,39	414
63	1,30	16	80	63,92	415
63	1,40	16	80	64,92	416
63	1,50	16	80	66,02	417
63	1,60	16	80	69,33	418
63	1,70	16	80	72,85	419
63	1,80	16	80	74,07	420
63	1,90	16	80	77,26	421
63	2,00	16	80	79,91	422
63	2,50	16	64	95,99	423
63	3,00	16	64	108,70	424
63	3,50	16	64	124,60	425
63	4,00	16	64	136,80	426
63	4,50	16	64	156,50	427
63	5,00	16	48	163,10	428
63	5,50	16	48	183,00	429
63	6,00	16	48	189,60	430

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	○

→ v_c/f_z Page 349

14

Cylindrical shank adapter for circular saw blades

▲ DCONWS = circular saw blade bore diameter

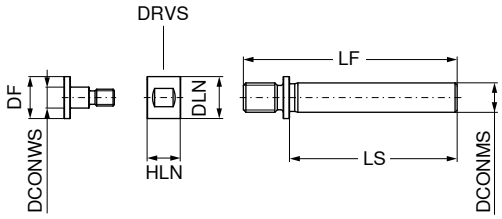

DCONMS h7	DLN	DF	LF	LS	HLN	DCONWS H7	DRVS	NEW X1 Article no. 72 900 ...	
mm	mm	mm	mm	mm	mm	mm	mm	EUR	
7	10	10	51	40	8	5	9	100,50	**005**
7	15	15	51	40	8	8	14	100,50	**008**
7	17	17	53	40	10	10	16	100,50	**010**
10	10	10	61	50	8	5	9	100,50	**105**
10	15	15	61	50	8	8	14	109,10	**108**
10	17	17	63	50	10	10	16	109,10	**110**
10	20	20	66	50	10	13	18	109,10	**113**
10	24	24	66	50	14	16	22	109,10	**116**
16	17	17	74	55	10	10	16	116,40	**210**
16	20	20	77	55	10	13	18	116,40	**213**
16	24	24	79	55	14	16	22	116,40	**216**

Spare parts	X1 Screw – SR Article no. 72 945 ...		X1 Lock nut – KM Article no. 72 945 ...	
for Article no.	EUR		EUR	
72 900 005	19,09	**000**	29,99	**005**
72 900 008	19,09	**001**	29,99	**006**
72 900 010	20,34	**002**	31,14	**007**
72 900 105	19,09	**000**	29,99	**005**
72 900 108	19,09	**001**	29,99	**006**
72 900 110	20,34	**002**	31,14	**007**
72 900 113	21,29	**003**	32,19	**008**
72 900 116	22,33	**004**	33,13	**009**
72 900 210	20,34	**010**	31,14	**012**
72 900 213	21,29	**003**	32,19	**008**
72 900 216	22,33	**011**	33,13	**013**

Application data for plastics cutters

Material	Strength N/mm² – HB	50 981 ... - 50 988 ...	50 932 ...	50 937 ...	50 936 ...	50 938 ...	50 610 ... 50 611 ...	50 946 ...	50 948 ...	50 947 ...
Aluminium (non alloyed, low alloyed)	< 350 N/mm²						●			
Aluminium	< 500 N/mm²						●			
Aluminium alloy 0,5–10 % Si	< 400 N/mm²						●			
Aluminium alloy 10 – 15 % Si	< 400 N/mm²					●		●	●	●
Aluminium	< 400 N/mm²					●		●	●	
Copper (non alloyed, low alloyed)	< 350 N/mm²						●			
Copper wrought alloys	< 700 N/mm²					●		●	●	●
Special copper alloys	< 200 HB					●		●	●	●
Special copper alloys	< 300 HB					●		●	●	●
Special copper alloys	< 300 HB					●		●	●	●
Short-chipping brass, bronze, red bronze	< 600 N/mm²						●			
Long-chipping brass	< 600 N/mm²						●			
Thermoplastics							●			
Duroplastics		●	●	●			●			
Fibre-reinforced plastics		●	●	●	●	●		●	●	●
Magnesium and Magnesium Alloys	< 850 N/mm²					●		●	●	●
Graphite		●	●	●	●	●		●		●
Tungsten and tungsten alloys									●	●
Molybdenum and molybdenum alloys									●	●
Machining direction		↘	↘	↘	↘	↘	↘	↘	↘	↘
		1	2	3	4	5	6	7	8	9

Tips

1

▲ Very sharp cutting edges for GFK and CFK and to prevent delamination of the component.

2

▲ For excellent tool life when machining AFK, CFK and Graphite.

3

4

▲ Specialist for machining honeycomb materials; Milling of pockets not fully through the workpiece.

5

▲ Specialist for machining honeycomb materials.

▲ Milling of recesses that pass through the material, the lower deck is pushed and upper deck pulled therefore the workpiece material is stabilized.

6

▲ For machining non fibre-reinforced plastics and non-ferrous metals with low silicon content. (PE, PA, PVC, acrylic glass)

7

8

▲ For machining fibre-reinforced plastics and non-ferrous metals with high silicon content.

9

14

Cutter for plastics

- right hand cutting
- cross-pitched
- downward chip evacuation
- 50 981 ... and 50 983 ... = fine pitch
- 50 982 ... and 50 984 ... = medium pitch



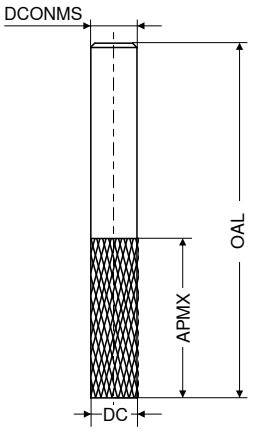

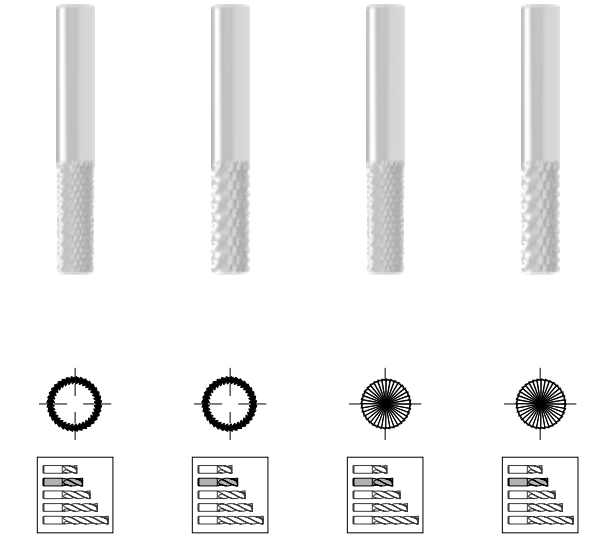

DC h10	APMX	OAL	DCONMS h6	Factory standard HA V0 Article no. 50 981 ...		Factory standard HA V0 Article no. 50 982 ...		Factory standard HA V0 Article no. 50 983 ...		Factory standard HA V0 Article no. 50 984 ...	
mm	mm	mm	mm	EUR		EUR		EUR		EUR	
2,0	7	40	2,0	14,33	020	14,99	020	17,41	020	18,08	020
2,0	7	50	6,0	29,32	021	29,32	021	31,52	021	31,52	021
3,0	10	40	3,0	14,33	030	14,99	030	17,41	030	18,08	030
3,0	12	50	6,0	29,32	031	29,32	031	31,52	031	31,52	031
3,5	12	40	3,5	16,97	035	17,52	035	18,96	035	19,73	035
4,0	15	40	4,0	19,28	040	19,95	040	20,50	040	21,70	040
4,0	20	50	6,0	29,32	041	29,32	041	31,52	041	31,52	041
4,5	15	50	4,5	22,26	045	23,15	045	24,02	045	25,02	045
5,0	16	50	5,0	25,13	050	26,46	050	27,23	050	28,33	050
5,0	25	75	6,0	44,97	051	44,97	051	46,96	051	46,96	051
6,0	18	50	6,0	29,32	060	28,22	060	31,52	060	30,31	060
6,0	35	75	6,0	44,97	061	44,97	061	46,96	061	46,96	061
7,0	22	60	7,0	41,01	070	39,12	070	43,20	070	41,66	070
8,0	25	63	8,0	46,96	080	45,08	080	49,71	080	47,83	080
8,0	40	100	8,0	62,39	081	62,39	081	65,24	081	65,24	081
9,0	25	63	9,0	59,52	090	57,21	090	62,39	090	59,74	090
10,0	30	72	10,0	63,48	100	60,84	100	65,92	100	63,60	100
12,0	32	83	12,0	89,72	120	86,41	120	93,13	120	89,17	120
14,0	32	83	14,0	142,30	140	134,50	140	152,10	140	147,80	140
16,0	36	92	16,0	194,00	160	185,20	160	208,30	160	199,50	160
18,0	40	92	18,0	262,30	180	251,30	180	283,30	180	272,30	180
20,0	45	104	20,0	315,20	200	300,90	200	338,30	200	326,30	200

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 348

Cutter for plastics

- right hand cutting
- cross-pitched
- downward chip evacuation
- 50 985 ... and 50 987 ... = fine pitch
- 50 986 ... and 50 988 ... = medium pitch



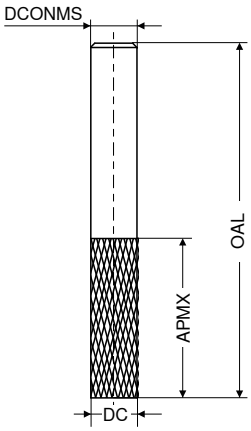

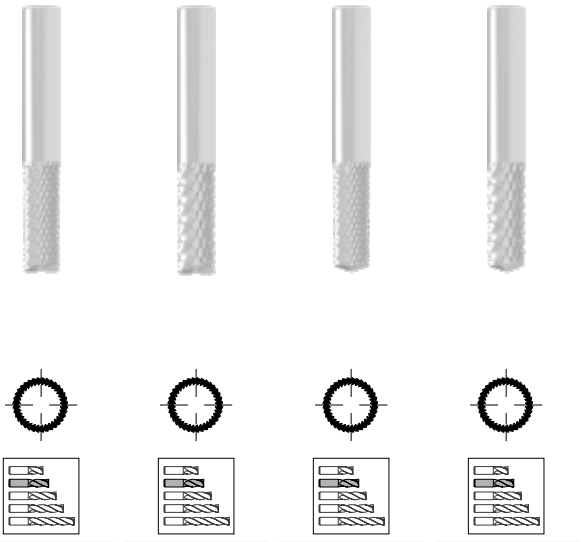

DC h10	APMX	OAL	DCONMS h6	Factory standard HA V0 Article no. 50 985 ...		Factory standard HA V0 Article no. 50 986 ...		Factory standard HA V0 Article no. 50 987 ...		Factory standard HA V0 Article no. 50 988 ...	
mm	mm	mm	mm	EUR		EUR		EUR		EUR	
2,0	7	40	2,0	18,18	020	18,96	020	18,18	020	18,96	020
2,0	7	50	6,0	33,51	021	33,51	021	33,51	021	33,51	021
3,0	10	40	3,0	18,18	030	18,96	030	18,18	030	18,96	030
3,0	12	50	6,0	33,51	031	33,51	031	33,51	031	33,51	031
3,5	12	40	3,5	20,06	035	20,94	035	20,06	035	20,94	035
4,0	15	40	4,0	21,83	040	23,04	040	21,83	040	23,04	040
4,0	20	50	6,0	33,51	041	33,51	041	33,51	041	33,51	041
4,5	15	50	4,5	25,36	045	26,68	045	25,36	045	26,68	045
5,0	16	50	5,0	29,10	050	30,31	050	29,10	050	30,31	050
5,0	25	75	6,0	49,05	051	49,05	051	49,05	051	49,05	051
6,0	18	50	6,0	33,51	060	32,29	060	33,51	060	32,29	060
6,0	35	75	6,0	49,05	061	49,05	061	49,05	061	49,05	061
7,0	22	60	7,0	46,06	070	44,53	070	46,06	070	44,53	070
8,0	25	63	8,0	52,69	080	50,59	080	52,69	080	50,59	080
8,0	40	100	8,0	68,44	081	68,44	081	68,44	081	68,44	081
9,0	25	63	9,0	65,24	090	62,71	090	65,24	090	62,71	090
10,0	30	72	10,0	68,78	100	65,92	100	68,78	100	65,92	100
12,0	32	83	12,0	96,66	120	92,47	120	96,66	120	92,47	120
14,0	32	83	14,0	155,50	140	149,90	140	155,50	140	149,90	140
16,0	36	92	16,0	213,80	160	201,80	160	213,80	160	201,80	160
18,0	40	92	18,0	287,70	180	275,60	180	287,70	180	275,60	180
20,0	45	104	20,0	346,10	200	330,60	200	346,10	200	330,60	200

Steel				
Stainless steel				
Cast iron				
Non ferrous metals	●	●	●	●
Heat resistant alloys				
hardened materials				

→ v_c/f_z Page 348

14

Ball nosed cutter for plastics

▲ right hand cutting
▲ cross-pitched



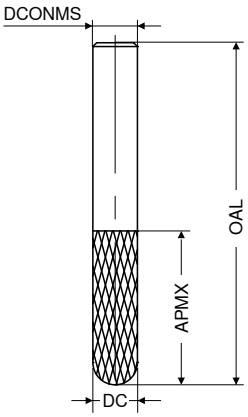

Factory standard

HA

V0

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	Article no. 50 932 ... EUR	
2	7	40	2	63,60	020
2	7	50	6	130,00	022
3	10	40	3	63,60	030
3	12	50	6	130,00	032
4	15	40	4	92,03	040
4	20	50	6	130,00	042
5	16	50	5	117,90	050
5	25	75	6	149,90	052
6	18	50	6	122,30	060
6	35	75	6	143,30	062
8	25	63	8	153,20	080
8	40	100	8	201,80	082
10	30	72	10	222,60	100
12	32	83	12	282,20	120
16	36	92	16	567,60	160
20	40	104	20	668,90	200

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

Cutter for plastics

▲ right hand cutting
▲ cross-pitched



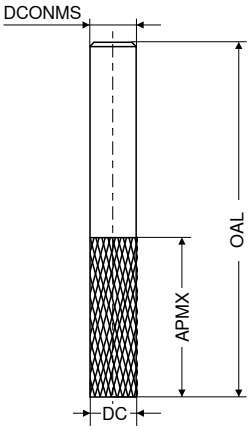

Factory standard

DC h10	APMX	OAL	DCONMS h6	V0 Article no. 50 937 ...	
mm	mm	mm	mm	EUR	
5	16	60	6	136,80	050
5	28	75	6	168,60	052
6	20	60	6	151,00	060
6	35	75	6	168,60	062
8	22	63	8	186,30	080
8	40	100	8	226,00	082
10	25	72	10	237,00	100
10	50	100	10	284,30	102
12	30	83	12	295,40	120
12	50	100	12	348,30	122
16	35	92	16	522,40	160
16	60	125	16	637,10	162

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

Cutter for honeycomb materials



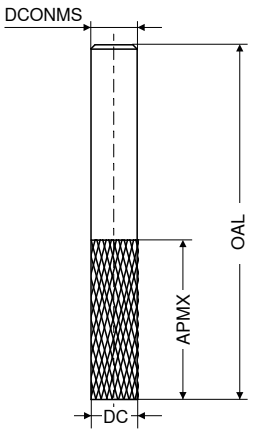

Factory standard

V0

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	Article no. 50 936 ... EUR	
6	16	50	6	75,83	006
8	19	63	8	111,30	008
10	22	72	10	141,00	010
12	26	83	12	192,80	012
14	17	100	12	228,10	014
16	17	100	12	347,20	016
20	17	100	12	476,10	020
24	10	100	12	564,30	024
24	17	100	12	609,40	025
44	17	100	12	1.118,00	044 1)

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

1) vertical plunging not possible

→ v_c/f_z Page 348

Right and left hand helix cutter for fibre re-inforced plastics



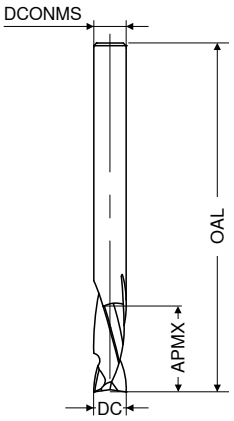

Factory standard

HA

V0

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 50 938 ... EUR	
2	6	40	6	2	126,80	**020**
3	12	40	3	2	61,71	**030**
3	12	50	6	2	126,80	**032**
4	14	40	4	2	70,21	**040**
5	16	50	5	2	88,07	**050**
6	18	50	6	2	107,20	**060**
8	20	63	8	2	130,00	**080**
10	25	72	10	2	155,50	**100**
12	30	83	12	2	226,00	**120**

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

Single flute cutter

▲ with polished chip flutes



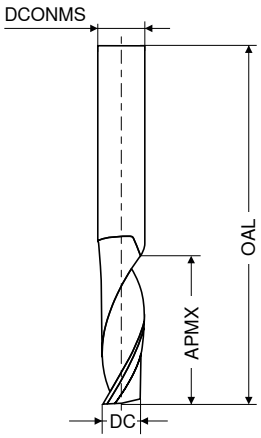



Right-hand helix
right-hand cutting

Left-hand helix
right-hand cutting

Factory standard

HA

Factory standard

HA

DC h10	APMX	OAL	DCONMS h6	ZEFP	V0 Article no. 50 610 ...		V0 Article no. 50 611 ...	
mm	mm	mm	mm		EUR		EUR	
1,5	6	40	3,0	1	26,78	015	26,78	015
2,0	6	40	3,0	1	26,78	019	26,78	019
2,0	10	40	2,0	1	16,65	020	16,65	020
2,0	10	60	6,0	1	39,56	022	39,56	022
2,0	12	60	6,0	1	40,66	024	40,66	024
2,5	6	40	2,5	1	26,78	025	26,78	025
3,0	12	40	3,0	1	17,86	030	17,86	030
3,0	10	40	6,0	1	38,79	032	38,79	032
3,0	12	60	6,0	1	39,56	034	39,56	034
3,0	15	60	6,0	1	39,56	036	39,56	036
4,0	15	40	4,0	1	21,60	040	21,60	040
4,0	15	60	6,0	1	39,56	042	39,56	042
4,0	20	75	6,0	1	64,03	044	64,03	044
5,0	16	50	5,0	1	27,66	050	27,66	050
5,0	16	60	6,0	1	39,56	052	39,56	052
5,0	28	75	6,0	1	71,75	054	71,75	054
6,0	20	60	6,0	1	31,96	060	31,96	060
6,0	30	60	6,0	1	38,79	062	38,79	062
6,0	35	75	6,0	1	58,08	064	58,08	064
8,0	22	63	8,0	1	51,58	080	51,58	080
8,0	40	100	8,0	1	93,13	084	93,13	084
10,0	25	72	10,0	1	77,59	100	77,59	100
10,0	55	100	10,0	1	155,50	105	155,50	105
12,0	30	83	12,0	1	102,90	120	102,90	120
14,0	30	83	14,0	1	153,20	140	153,20	140
16,0	35	92	16,0	1	218,30	160	218,30	160
18,0	35	92	18,0	1	260,10	180	260,10	180
20,0	40	104	20,0	1	293,20	200	293,20	200

Steel		
Stainless steel		
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys		
hardened materials		

→ v_c/f_z Page 348

Cutter for plastics

▲ with polished flutes



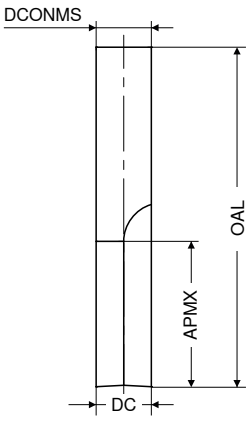

Factory standard

DC h10	APMX	OAL	DCONMS h6	ZEFP	V0 Article no. 50 946 ...	
mm	mm	mm	mm		EUR	
1,5	6	40	3	1	32,96	015
2,0	6	40	3	1	32,96	020
2,0	10	40	2	1	23,70	022
2,0	10	60	6	1	47,94	024
2,0	12	60	6	1	49,38	026
3,0	12	40	3	1	24,91	030
3,0	12	60	6	1	47,94	032
3,0	15	60	6	1	47,94	034
4,0	15	60	6	1	47,94	040
4,0	20	75	6	1	72,63	042
5,0	16	60	6	1	47,94	050
5,0	28	75	6	1	80,46	052
6,0	20	60	6	1	41,77	060
6,0	30	60	6	1	47,51	062
6,0	35	75	6	1	66,89	064
8,0	22	63	8	1	64,92	080
8,0	40	100	8	1	104,30	082
10,0	25	72	10	1	96,54	100
10,0	55	100	10	1	169,70	102
12,0	30	83	12	1	125,70	120

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

14

Cutter for plastics

▲ with polished flutes



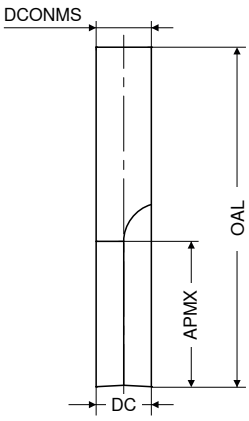

Factory standard

HA

V0

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 50 948 ... EUR	
2	6	40	6	2	50,14	020
3	12	40	3	2	28,88	030
3	12	50	6	2	50,14	031
4	14	40	6	2	50,14	040
5	16	50	5	2	37,80	050
6	18	50	6	2	45,41	060
8	20	63	8	2	65,58	080
10	25	72	10	2	85,64	100
12	30	83	12	2	113,60	120

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

Ball nosed cutter for plastics

▲ with polished flutes
▲ irregular pitch



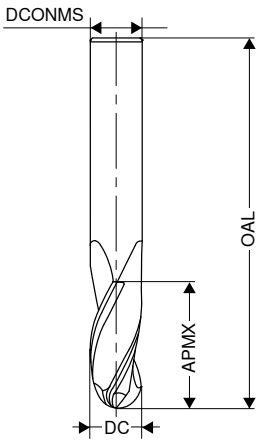

Ti40

DIN 6527 L

HA

V0

DC $_{h10}$ mm	APMX mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	Article no. 50 947 ...	
					EUR	
3	10	57	6	3	68,78	**030**
4	13	57	6	3	68,78	**040**
5	15	57	6	3	68,78	**050**
6	18	57	6	3	58,74	**060**
7	20	63	8	3	91,04	**070**
8	20	63	8	3	80,46	**080**
9	22	72	10	3	123,50	**090**
10	25	72	10	3	108,70	**100**
12	30	83	12	3	141,00	**120**
14	30	83	14	3	215,00	**140**
16	35	92	16	3	287,70	**160**
18	35	92	18	3	343,80	**180**
20	45	104	20	3	405,60	**200**

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	●
Heat resistant alloys	
hardened materials	

→ v_c/f_z Page 348

Slot milling cutter



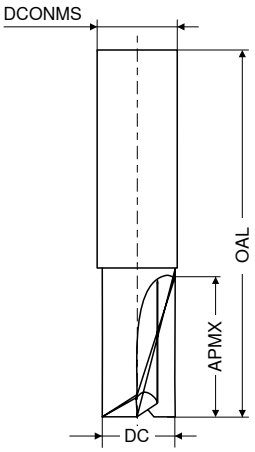

Factory standard

V1

DC e8 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	Article no. 52 168 ... EUR	
2	8	50	3	2	17,52	020
3	12	50	3	2	17,52	030
4	13	60	4	2	18,18	040
5	14	60	5	2	22,38	050
6	16	58	6	2	25,57	060
7	20	65	8	2	33,51	070
8	20	65	8	2	34,16	080
9	22	70	10	2	45,51	090
10	22	70	10	2	54,23	100
12	25	70	12	2	72,08	120

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	○
Heat resistant alloys	○
hardened materials	

→ v_c/f_z Page 350–353

Material examples referring to the cutting data tables

	Index	Material	Strength N/mm² / HB / HRC	Material number	Material designation	Material number	Material designation	Material number	Material designation
P	1.1	General construction steel	< 800 N/mm²	1.0402	EN3B				
	1.2	Free cutting steel	< 800 N/mm²	1.0711	EN1A				
	1.3	Hardened steel, non alloyed	< 800 N/mm²	1.0401	EN32C				
	1.4	Alloyed hardened steel	< 1000 N/mm²	1.7325	25 CD4				
	1.5	Tempering steel, unalloyed	< 850 N/mm²	1.5752	EN36	1.0535	EN9		
	1.6	Tempering steel, unalloyed	< 1000 N/mm²	1.6582	EN24				
	1.7	Tempering steel, alloyed	< 800 N/mm²	1.7225	EN19				
	1.8	Tempering steel, alloyed	< 1300 N/mm²	1.8515	EN40B				
	1.9	Steel castings	< 850 N/mm²	0.9650	G-X 260 Cr 27	1.6750	GS-20 NiCrMo 3.7	1.6582	GS-34 CrNiMo 6
	1.10	Nitriding steel	< 1000 N/mm²	1.8509	EN41B				
	1.11	Nitriding steel	< 1200 N/mm²	1.1186	EN8	1.1160	EN14A		
	1.12	Roller bearing steel	< 1200 N/mm²	1.3505	534A99				
	1.13	Spring steel	< 1200 N/mm²		EN45		EN47		EN43
	1.14	High-speed steel	< 1300 N/mm²	1.3343	M2	1.3249	M34		
	1.15	Cold working tool steel	< 1300 N/mm²	1.2379	D2	1.2311	P20		
	1.16	Hot working tool steel	< 1300 N/mm²	1.2344	H13				
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm²	1.4581	318				
	2.2	Stainless steel, ferritic	< 750 N/mm²	1.4000	403				
	2.3	Stainless steel, martensitic	< 900 N/mm²	1.4057	EN57				
	2.4	Stainless steel, ferritic / martensitic	<1100 N/mm²	1.4028	EN56B				
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm²	1.4542	17-4PH				
	2.6	Stainless steel, austenitic	< 750 N/mm²	1.4305	303	1.4401	316	1.4301	304
	2.7	Heat resistant steel	< 1100 N/mm²	1.4876	Incoloy 800				
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm²	0.6015	Grade 150	0.6020	Grade 220	0.6025	Grade 260
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm²	0.6030	Grade 300	0.6035	Grade 350	0.6040	Grade 400
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm²	0.7040	SG 400-12	0.7043	SG 370-17	0.7050	SG 500-7
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm²	0.7060	SG 600-3	0.7070	SG 700-2	0.7080	SG 800-2
	3.5	White malleable cast iron	270–450 N/mm²	0.8035	GTW-35	0.8045	GTW-45		
	3.6	White malleable cast iron	500–650 N/mm²	0.8055	GTW-55	0.8065	GTW-65		
	3.7	Black malleable cast iron	300–450 N/mm²	0.8135	GTS-35	0.8145	GTS-45		
	3.8	Black malleable cast iron	500–800 N/mm²	0.8155	GTS-55	0.8170	GTS-70		
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm²	3.0255	1050 A	3.0275	1070 A	3.0285	1080 A (A8)
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm²	3.1325	2017 A (AU4G)	3.4335	7005 (AZ5G)	3.4365	7075 (AZ5GU)
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm²	3.2315	A- G S1	3.2373	A-S9 G	3.2151	A-S 6 U4
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm²	3.2581	A-S12	3.2583	A-S12 U		
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm²		A-S18	A-S17 U4			
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm²	2.0040	Cu-c1	2.0060	Cu-a1	2.0090	Cu-b1
	4.7	Copper wrought alloys	< 700 N/mm²	2.1247	Cub2 (Berylium Copper)	2.0855	CuN2S (Nickel Copper)	2.1310	CU-Fe2P
	4.8	Special copper alloys	< 200 HB	2.0916	Cu-A5	2.1525	Cu-S3 M		Ampco 8 (Cu-A6Fe2)
	4.9	Special copper alloys	< 300 HB	2.0978	Cu-Al11 Fe5 Ni5)		Ampco 18 (Cu- A10 Fe3)		
	4.10	Special copper alloys	> 300 HB	2.1247	Cu Be2		Ampco M4		
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm²	2.0331	Cu Zn36 Pb1,5	2.0380	Cu Zn39 Pb2 (Ms 56)	2.0410	Cu Zn44 Pb2
	4.12	Long-chipping brass	< 600 N/mm²	2.0335	Cu Zn 36 (Ms63)	2.1293	Cu Cr1 Zr		
	4.13	Thermoplastics		PE	PVC	PS	Polystyrene		Plexiglas
	4.14	Duroplastics		PF	Bakelite		Pertinax		
	4.15	Fibre-reinforced plastics			Carbon Fibre		Fibreglass		Aramid Fibre (Kevlar)
	4.16	Magnesium and magnesium alloys	< 850 N/mm²	3.5812	Mg A7 Z1	3.5662	Mg A9	3.5105	Mg Tr3 Z2 Zn 1
	4.17	Graphite			R8500X		R8650		Technograph 15
	4.18	Tungsten and tungsten alloys			W-Ni Fe (Densimet)		W- Ni Cu (Inermet)		Denal
	4.19	Molybdenum and molybdenum alloys			TZM		MHQ		Mo W
S	5.1	Pure nickel		2.4066	Ni99 (Nickel 200)	2.4068	Lc Ni99 (Nickel 201)		
	5.2	Nickel alloys		1.3912	Fe-Ni36 (Invar)	1.3917	Fe -Ni42 (N42)	1.3922	Fe-Ni48 (N48)
	5.3	Nickel alloys	< 850 N/mm²	2.4375	Ni Cu30 Al (Monel K500)	2.4360	Ni Cu30Fe (Monel 400)	2.4668	
	5.4	Nickel molybdenum alloys		2.4600	Ni Mo30Cr2 (Hastelloy B4)	2.4617	Ni Mo28 (Hastelloy B2)	2.4819	Ni Mo16Cr16 Hastell. C276
	5.5	Nickel-chromium alloys	< 1300 N/mm²	2.4951	Ni Cr20TiAl (Nimonic 80A)	2.4858	Ni Cr21Mo (Inconel 825)	2.4856	Ni Cr22Mo9Nb Inconel 625
	5.6	Cobalt Chrome Alloys	< 1300 N/mm²	2.4964	Co Cr20 W15 Ni10		Co Cr20 Ni16 Mo7		Co Cr28 Mo 6
	5.7	Heat resistant alloys	< 1300 N/mm²	1.4718	Z45 C S 9-3	1.4747	Z80 CSN 20-02	1.4845	Z12 CN 25-20
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm²	2.4851	Ni Cr23Fe (Inconel 601)	2.4668	Ni Cr19NbMo (Inconel 718)	2.4602	Ni Cr21Mo14 Hastelloy C22
	5.9	Pure titanium	< 900 N/mm²	3.7025	T35 (Titanium Grade 1)	3.7034	T40 (Titanium Grade 2)	3.7064	T60 (Titanium Grade 4)
	5.10	Titanium alloys	< 700 N/mm²		T-A6-Nb7 (367)		T-A5-Sn2-Mo4-Cr4 (Ti17)		T-A3-V2,5 (Gr18)
	5.11	Titanium alloys	< 1200 N/mm²	3.7165	T-A6-V4 (Ta6V)		T-A4-3V-Mo2-Fe2 (SP700)		T-A5-Sn1-Zr1-V1-Mo (Gr32)
H	6.1		< 45 HRC						
	6.2		46–55 HRC						
	6.3	Tempered steel	56–60 HRC						
	6.4		61–65 HRC						
	6.5		65–70 HRC						

Cutting Data – MonsterMill – End Mills – SCR, short – long

Index	Emulsion	Compressed air	MMS	short	long	Ø DC = 3,0–3,5 mm			Ø DC = 4,0–4,5 mm			short	long	Ø DC = 5,0–5,5 mm			Ø DC = 6,0–7,5 mm			Ø DC = 8,0–9,5 mm		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c m/min			$a_{p\,max.}$ x DC		f_z mm			f_z mm			$a_{p\,max.}$ x DC		f_z mm			f_z mm			f_z mm		
1.1	105–140	190–240		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.2	105–140	200–250		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
1.3	90–120	160–210		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
1.4	80–115	140–190		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.5	90–120	150–200		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.6	90–120	140–190		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.7	80–115	140–190		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.8	70–100	120–170		1,0	1,0	0,025	0,019	0,014	0,035	0,027	0,020	1,0	1,0*	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
1.9	70–100	120–170		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.10	70–100	140–190		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.11	70–100	120–170		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.12	70–100	140–190		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.13	70–100	90–150		1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
1.14	50–80	70–120		1,0	1,0	0,017	0,013	0,010	0,024	0,018	0,013	1,0	1,0*	0,034	0,025	0,017	0,046	0,034	0,023	0,06	0,05	0,03
1.15	70–100	130–180		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.16	80–120	110–160		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
2.1	90–130			1,0	1,0	0,025	0,019	0,014	0,035	0,027	0,020	1,0	1,0*	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
2.2	80–120			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.3	80–120			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.4	80–120			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.5	80–120			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.6	80–120			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.7	40–60			1,0	1,0	0,017	0,013	0,010	0,024	0,018	0,013	1,0	1,0*	0,035	0,025	0,017	0,046	0,034	0,023	0,06	0,05	0,03
3.1		200–240		1,0	1,0	0,040	0,031	0,022	0,055	0,043	0,031	1,0	1,0*	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
3.2		180–220		1,0	1,0	0,040	0,031	0,022	0,055	0,043	0,031	1,0	1,0*	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
3.3		200–240		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
3.4		180–220		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
3.5		160–200		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
3.6		140–180		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
3.7		160–200		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
3.8		140–180		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
4.1																						
4.2																						
4.3																						
4.4																						
4.5																						
4.6	140–160	230–280		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.7	120–140	200–300		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.8	110–140	140–180		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.9	90–130	120–160		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.10	80–120	100–140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.11	150–200	280–350		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
4.12	140–180	260–300		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
4.13																						
4.14	180–280	300–400		1,0	1,0	0,067	0,052	0,038	0,094	0,073	0,053	1,0	1,0*	0,135	0,101	0,068	0,180	0,134	0,090	0,24	0,18	0,12
4.15																						
4.16																						
4.17																						
4.18	60–90	80–120		0,5	0,5	0,027	0,021	0,015	0,038	0,029	0,021	1,0	1,0	0,054	0,040	0,027	0,072	0,054	0,036	0,10	0,07	0,05
4.19	40–60	60–80		0,5	0,5	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0	0,045	0,018	0,023	0,060	0,045	0,030	0,08	0,06	0,04
5.1	30			0,5	0,5	0,022	0,017	0,012	0,030	0,023	0,017	0,5	0,5	0,043	0,032	0,022	0,058	0,043	0,029	0,08	0,06	0,04
5.2	30			0,5	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,5	0,5	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
5.3	30			0,5	0,5	0,018	0,014	0,010	0,025	0,019	0,014	0,5	0,5	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
5.4	30			0,5	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.5	30			0,5	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.6	30			0,5	0,5	0,011	0,009	0,006	0,016	0,012	0,009	0,5	0,5	0,023	0,017	0,011	0,030	0,022	0,015	0,04	0,03	0,02
5.7	45			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.8	30			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.9	80–160			0,5	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,5	0,5	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
5.10	80–140			0,5	0,5	0,025	0,019	0,014	0,035	0,027	0,019	0,5	0,5	0,050	0,037	0,025	0,066	0,049	0,033	0,09	0,07	0,04
5.11	50–100			0,5	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,5	0,5	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
6.1		120–160		0,5	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,5	0,5	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
6.2		80–120		0,3	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,3	0,3	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
6.3		60–100		0,15	0,15	0,016	0,012	0,009	0,022	0,017	0,012	0,15	0,15	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
6.4																						
6.5																						

* = With an a_p of 1.5xD, the feed rate per tooth f_z should be multiplied by 0.8

SCR ball nosed cutters at full slot, reduce f_z by 25 %!

Plunging angle for ramping and helical milling: No. of teeth 4 = 4° / No. of teeth 6 = 1°

Index	Ø DC = 10,0–11,5 mm			Ø DC = 12,0 mm			Ø DC = 14,0–15,5 mm			Ø DC = 16,0–17,0 mm			Ø DC = 18,0–19,5 mm			Ø DC = 20,0 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.2	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
1.3	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
1.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.6	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.7	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.8	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
1.9	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.10	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.11	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.12	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.13	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	○	●	○
1.14	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	○	●	○
1.15	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.16	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
2.1	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
2.2	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.3	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.4	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.5	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.6	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.7	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
3.1	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,21	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16		●	
3.2	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,21	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16		●	
3.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
3.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
3.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
3.6	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
3.7	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
3.8	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
4.1																					
4.2																					
4.3																					
4.4																					
4.5																					
4.6	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.7	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.8	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.9	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.10	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.11	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
4.12	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
4.13																					
4.14	0,30	0,22	0,15	0,33	0,25	0,17	0,33	0,26	0,18	0,36	0,27	0,21	0,38	0,31	0,24	0,43	0,35	0,27	●		○
4.15																					
4.16																					
4.17																					
4.18	0,12	0,09	0,06	0,10	0,10	0,07	0,13	0,10	0,07	0,14	0,11	0,08	0,15	0,12	0,10	0,17	0,14	0,11	●		○
4.19	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		○
5.1	0,10	0,07	0,05	0,11	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,14	0,11	0,09	●		
5.2	0,09	0,07	0,05	0,10	0,04	0,05	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08	●		
5.3	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07	●		
5.4	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.5	0,07	0,05	0,04	0,08	0,03	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.6	0,05	0,04	0,03	0,06	0,04	0,03	0,06	0,04	0,03	0,06	0,05	0,04	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.7	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.8	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.9	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
5.10	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,11	0,09	0,16	0,13	0,10	●		
5.11	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
6.1	0,09	0,07	0,05	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08		●	
6.2	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
6.3	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06		●	
6.4																					
6.5																					

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

14

Cutting Data – MonsterMill – End Mills – SCR, extra long

Index	Emulsion	Compressed air	MMS	extra long		Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c m/min			$a_{p\,max.}$ x DC		f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	90–130	130–180		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.2	90–130	130–180		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
1.3	70–100	110–160		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
1.4	70–100	90–140		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.5	70–100	110–160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.6	70–100	110–160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.7	70–100	90–140		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
1.8	50–80	70–120		1,0*	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
1.9	50–80	70–120		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.10	50–80	70–120		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.11	50–80	70–120		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.12	50–80	70–120		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.13	50–80	70–120		1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
1.14	40–70	50–80		1,0*	0,5	0,017	0,013	0,010	0,024	0,018	0,013	0,034	0,025	0,017	0,046	0,034	0,023	0,06	0,05	0,03
1.15	50–80	70–120		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
1.16	60–90	90–140		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
2.1	60–100			1,0*	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
2.2	50–80			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.3	50–80			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.4	50–80			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.5	50–80			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.6	50–80			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
2.7	30–50			1,0*	0,5	0,017	0,013	0,010	0,024	0,018	0,013	0,034	0,025	0,017	0,047	0,034	0,023	0,06	0,05	0,03
3.1		160–200		1,0*	0,5	0,040	0,031	0,022	0,055	0,043	0,031	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
3.2		120–160		1,0*	0,5	0,040	0,031	0,022	0,055	0,043	0,031	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
3.3		160–200		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
3.4		120–160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
3.5		120–160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
3.6		100–140		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
3.7		120–160		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
3.8		100–140		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6	100–130	220–240		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.7	90–110	180–220		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.8	80–110	140–180		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.9	60–90	120–160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.10	60–90	100–140		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
4.11	110–150	280–320		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
4.12	100–140	260–300		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
4.13																				
4.14	120–180	300–400		1,0*	0,5	0,067	0,052	0,038	0,094	0,073	0,053	0,135	0,101	0,068	0,180	0,134	0,090	0,24	0,18	0,12
4.15																				
4.16																				
4.17																				
4.18	40–75	80–120		0,5*	0,25	0,027	0,021	0,015	0,038	0,029	0,021	0,054	0,040	0,027	0,072	0,054	0,036	0,10	0,07	0,05
4.19	30–50	60–80		0,5*	0,25	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,018	0,023	0,060	0,045	0,030	0,08	0,06	0,04
5.1	30			0,5*	0,25	0,022	0,017	0,012	0,030	0,023	0,017	0,043	0,032	0,022	0,058	0,043	0,029	0,08	0,06	0,04
5.2	30			0,5*	0,25	0,020	0,016	0,011	0,028	0,022	0,016	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
5.3	25			0,5*	0,25	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
5.4	25			0,5*	0,25	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.5	25			0,5*	0,25	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.6	25			0,5*	0,25	0,011	0,009	0,006	0,016	0,012	0,009	0,023	0,017	0,011	0,030	0,022	0,015	0,04	0,03	0,02
5.7	45			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.8	25			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
5.9	35–65			0,5*	0,25	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
5.10	30–55			0,5*	0,25	0,025	0,019	0,014	0,035	0,027	0,019	0,050	0,037	0,025	0,066	0,049	0,033	0,09	0,07	0,04
5.11	30–55			0,5*	0,25	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
6.1		80–120		0,5*	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
6.2		60–100		0,5*	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
6.3		50–90		0,5*	0,15	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
6.4																				
6.5																				

* = Trimming and trochoidal slot milling

Plunging angle for ramping and helical milling: No. of teeth 4 = 4° / No. of teeth 6 = 1°

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.2	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
1.3	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
1.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.6	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.7	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
1.8	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
1.9	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.10	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.11	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.12	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.13	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	○	●	○
1.14	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	○	●	○
1.15	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
1.16	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
2.1	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
2.2	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.3	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.4	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.5	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.6	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
2.7	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
3.1	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,20	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16	○	●	○
3.2	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,20	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16	○	●	○
3.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
3.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
3.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
3.6	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
3.7	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
3.8	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
4.1																					
4.2																					
4.3																					
4.4																					
4.5																					
4.6	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.7	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.8	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.9	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.10	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
4.11	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
4.12	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
4.13																					
4.14	0,30	0,22	0,15	0,33	0,25	0,17	0,33	0,26	0,18	0,33	0,27	0,21	0,38	0,31	0,24	0,43	0,35	0,27	●		○
4.15																					
4.16																					
4.17																					
4.18	0,12	0,09	0,06	0,10	0,10	0,07	0,13	0,10	0,07	0,13	0,11	0,08	0,15	0,12	0,10	0,17	0,14	0,11	●		○
4.19	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		○
5.1	0,10	0,07	0,05	0,11	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,14	0,11	0,09	●		
5.2	0,09	0,07	0,05	0,10	0,04	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08	●		
5.3	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07	●		
5.4	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.5	0,07	0,05	0,04	0,08	0,03	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.6	0,05	0,04	0,03	0,06	0,04	0,03	0,06	0,04	0,03	0,06	0,05	0,04	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.7	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.8	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
5.9	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
5.10	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,09	0,07	0,12	0,10	0,08	0,14	0,11	0,09	0,16	0,13	0,10	●		
5.11	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
6.1	0,09	0,07	0,05	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08		●	
6.2	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
6.3	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06		●	
6.4																					
6.5																					

14

Cutting data – MonsterMill – Torus End Mills – SCR, long

			Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
		long	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	170–200	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,08	0,06	0,04
1.2	170–200	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,08	0,06	0,04
1.3	150–180	1,0	0,019	0,017	0,012	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03
1.4	150–180	1,0	0,019	0,017	0,012	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03
1.5	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.6	140–170	1,0	0,019	0,017	0,012	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.7	150–180	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03
1.8	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.9	150–180	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03
1.10	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.11	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.12	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.13	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.14	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
1.15	150–180	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03
1.16	130–160	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
2.1																	
2.2																	
2.3																	
2.4																	
2.5																	
2.6																	
2.7																	
3.1	170–200	1,0	0,028	0,025	0,018	0,043	0,033	0,024	0,056	0,042	0,028	0,072	0,054	0,036	0,10	0,07	0,05
3.2	170–200	1,0	0,028	0,025	0,018	0,043	0,033	0,024	0,056	0,042	0,028	0,072	0,054	0,036	0,10	0,07	0,05
3.3	150–180	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,046	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
3.4	150–180	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,046	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
3.5	100–120	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
3.6	80–100	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
3.7	100–120	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
3.8	80–100	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6																	
4.7																	
4.8																	
4.9																	
4.10																	
4.11																	
4.12																	
4.13																	
4.14																	
4.15																	
4.16																	
4.17																	
4.18	80–100	0,5	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
4.19																	
5.1																	
5.2																	
5.3																	
5.4																	
5.5																	
5.6																	
5.7																	
5.8																	
5.9																	
5.10																	
5.11																	
6.1	100–120	0,5	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
6.2	80–100	0,3	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02
6.3	60–70	0,15	0,009	0,008	0,006	0,014	0,011	0,008	0,020	0,015	0,010	0,024	0,018	0,012	0,03	0,02	0,02
6.4																	
6.5																	

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm					
1.1	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
1.2	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
1.3	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.4	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.5	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.6	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.7	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.8	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.9	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.10	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.11	0,06	0,05	0,03	0,00	0,00	0,00	0,08	0,06	0,05	○	●	
1.12	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.13	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.14	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.15	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.16	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
2.1												
2.2												
2.3												
2.4												
2.5												
2.6												
2.7												
3.1	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
3.2	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
3.3	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
3.4	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
3.5	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
3.6	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
3.7	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
3.8	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
4.1												
4.2												
4.3												
4.4												
4.5												
4.6												
4.7												
4.8												
4.9												
4.10												
4.11												
4.12												
4.13												
4.14												
4.15												
4.16												
4.17												
4.18	0,06	0,05	0,03	0,05	0,05	0,04	0,08	0,06	0,05	○		○
4.19												
5.1												
5.2												
5.3												
5.4												
5.5												
5.6												
5.7												
5.8												
5.9												
5.10												
5.11												
6.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
6.2	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
6.3	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03		●	
6.4												
6.5												

Cutting data – MonsterMill – Torus End Mills – SCR, extra long

		extra long	Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			● 1st choice		○ suitable
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm					
1.1	120–140	1,0* 0,5	0,08	0,06	0,04	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
1.2	120–140	1,0* 0,5	0,08	0,06	0,04	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
1.3	100–130	1,0* 0,5	0,06	0,05	0,03	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.4	100–130	1,0* 0,5	0,06	0,05	0,03	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.5	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.6	100–120	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.7	100–130	1,0* 0,5	0,06	0,05	0,03	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.8	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.9	100–130	1,0* 0,5	0,06	0,05	0,03	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.10	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.11	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,00	0,00	0,00	0,08	0,06	0,05	○	●	
1.12	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.13	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.14	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
1.15	100–130	1,0* 0,5	0,06	0,05	0,03	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
1.16	90–110	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
2.1																	
2.2																	
2.3																	
2.4																	
2.5																	
2.6																	
2.7																	
3.1	120–140	1,0* 0,5	0,10	0,07	0,05	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
3.2	120–140	1,0* 0,5	0,10	0,07	0,05	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
3.3	100–130	1,0* 0,5	0,08	0,06	0,04	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
3.4	100–130	1,0* 0,5	0,08	0,06	0,04	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
3.5	70–85	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
3.6	60–70	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
3.7	70–85	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
3.8	60–70	1,0* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6																	
4.7																	
4.8																	
4.9																	
4.10																	
4.11																	
4.12																	
4.13																	
4.14																	
4.15																	
4.16																	
4.17																	
4.18	60–70	0,5* 0,25	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	●		○
4.19																	
5.1																	
5.2																	
5.3																	
5.4																	
5.5																	
5.6																	
5.7																	
5.8																	
5.9																	
5.10																	
5.11																	
6.1	70–85	0,5* 0,5	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
6.2	60–70	0,5* 0,3	0,05	0,04	0,02	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
6.3	50–60	0,5* 0,15	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03		●	
6.4																	
6.5																	

* = Trimming and trochoidal slot milling

Cutting data – MonsterMill – Torus End Mills – SCR, extra long, HSC machining

● 1st choice ○ suitable

Index	v_c m/min	a_p x DC	a_e x DC	Ø DC = 3 mm f_z mm	Ø DC = 4 mm f_z mm	Ø DC = 5 mm f_z mm	Ø DC = 6 mm f_z mm	Ø DC = 8 mm f_z mm	Ø DC = 10 mm f_z mm	Ø DC = 12 mm f_z mm	Ø DC = 16 mm f_z mm	Emulsion	Compressed air	MMS
1.1	**230–250**	0,05	0,6	0,110	0,152	0,190	0,228	0,30	0,38	0,46	0,60	○	●	
1.2	**230–250**	0,05	0,6	0,110	0,152	0,190	0,228	0,30	0,38	0,46	0,60	○	●	
1.3	**200–220**	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
1.4	**200–220**	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
1.5	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.6	**190–210**	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
1.7	**200–220**	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
1.8	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.9	**200–220**	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
1.10	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.11	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.12	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.13	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.14	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
1.15	**200–220**	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
1.16	**170–190**	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
2.1														
2.2														
2.3														
2.4														
2.5														
2.6														
2.7														
3.1	**230–250**	0,05	0,6	0,120	0,160	0,200	0,240	0,32	0,40	0,48	0,64	○	●	
3.2	**230–250**	0,05	0,6	0,120	0,160	0,200	0,240	0,32	0,40	0,48	0,64	○	●	
3.3	**200–220**	0,04	0,5	0,096	0,130	0,160	0,192	0,26	0,32	0,38	0,51	○	●	
3.4	**200–220**	0,04	0,5	0,096	0,130	0,160	0,192	0,26	0,32	0,38	0,51	○	●	
3.5	**130–150**	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
3.6	**100–120**	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
3.7	**130–150**	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
3.8	**100–120**	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
4.1														
4.2														
4.3														
4.4														
4.5														
4.6														
4.7														
4.8														
4.9														
4.10														
4.11														
4.12														
4.13														
4.14														
4.15														
4.16														
4.17														
4.18	100–120	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	●		○
4.19														
5.1														
5.2														
5.3														
5.4														
5.5														
5.6														
5.7														
5.8														
5.9														
5.10														
5.11														
6.1	130–150	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38		●	
6.2	100–120	0,03	0,3	0,060	0,080	0,100	0,120	0,16	0,20	0,24	0,32		●	
6.3	90–110	0,02	0,3	0,048	0,064	0,080	0,096	0,13	0,16	0,19	0,26		●	
6.4	80–100	0,02	0,2	0,024	0,056	0,070	0,084	0,11	0,14	0,17	0,22		●	
6.5	60–80	0,02	0,2	0,036	0,048	0,060	0,072	0,10	0,12	0,14	0,19		●	

Cutting data standard values – MonsterMill – End mills – ICR, short

	Emulsion	Compressed air	MMS	short	Ø DC = 1,5 mm			Ø DC = 2 mm			Ø DC = 2,5 mm			● 1st choice		○ suitable
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
Index	v_c m/min			$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm					
1.1	130–180	150–200		0,25	0,020	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	○	●	○
1.2	130–180	150–200		0,25	0,012	0,013	0,010	0,020	0,019	0,014	0,029	0,024	0,018	○	●	○
1.3	140–160	130–180		0,25	0,014	0,013	0,010	0,020	0,019	0,014	0,029	0,024	0,018	○	●	○
1.4	120–140	110–160		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
1.5	140–160	130–180		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
1.6	140–160	130–180		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
1.7	120–160	110–160		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
1.8	80–120	90–140		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	○	●	○
1.9	80–120	90–140		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
1.10	80–120	90–140		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
1.11	80–120	90–140		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
1.12	80–120	90–140		0,25	0,011	0,010	0,008	0,013	0,012	0,009	0,020	0,017	0,012	○	●	○
1.13	80–120	90–140		0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	○	●	○
1.14	60–100	50–100		0,25	0,009	0,008	0,006	0,011	0,010	0,008	0,016	0,013	0,010	○	●	○
1.15	80–120	90–140		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
1.16	100–140	110–160		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
2.1	**100–140**			0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	●		
2.2	**100–120**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
2.3	**80 –100**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
2.4	**80 –100**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
2.5	**100–120**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
2.6	**100–120**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
2.7	**40–60**			0,25	0,009	0,008	0,006	0,011	0,010	0,008	0,016	0,013	0,010	●		
3.1		180–220		0,25	0,020	0,019	0,014	0,025	0,024	0,018	0,036	0,030	0,022		●	
3.2		160–200		0,25	0,020	0,019	0,014	0,025	0,024	0,018	0,036	0,030	0,022		●	
3.3		180 –220		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019		●	
3.4		160 –200		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019		●	
3.5		140 –180		0,25	0,014	0,013	0,010	0,022	0,020	0,015	0,028	0,023	0,017		●	
3.6		120–160		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
3.7		140 –180		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
3.8		120 –160		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
4.1																
4.2																
4.3																
4.4																
4.5																
4.6	220–240	220–240		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
4.7	220–240	220–240		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
4.8	140–160	140–160		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
4.9	120–140	120–140		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
4.10	100–120	100–120		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
4.11	280–300	280–300		0,25	0,007	0,007	0,005	0,020	0,019	0,014	0,029	0,024	0,018	●		○
4.12	280–300	280–300		0,25	0,014	0,013	0,010	0,020	0,019	0,014	0,029	0,024	0,018	●		○
4.13																
4.14	300–340	300–340		0,25	0,029	0,027	0,020	0,043	0,040	0,030	0,051	0,043	0,032	●		○
4.15																
4.16																
4.17																
4.18	80–120	80–120		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
4.19	60–80	60–80		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
5.1	**30**			0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	●		
5.2	**30**			0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	●		
5.3	**25**			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
5.4	**25**			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
5.5	**25**			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
5.6	**25**			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
5.7	**45**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
5.8	**30**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
5.9	**80–100**			0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	●		
5.10	**60–80**			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
5.11	**60–80**			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
6.1		80–100		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015		●	
6.2		80–120		0,20	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013		●	
6.3		60–80		0,15	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012		●	
6.4																
6.5																

Plunging angle for ramping and helical milling: No. of teeth 3 = 5°/No. of teeth 4 = 4°/No. of teeth 5 = 3°

Cutting Data – MonsterMill – End Mills – ICR, short – long

	Emulsion	Compressed air	MMS	short	long	Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			● 1st choice		○ suitable
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
Index	v_c m/min			$a_{p\,max.}$ x DC		f_z mm			f_z mm			f_z mm			f_z mm					
1.1	130–180	150–200		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	○	●	○
1.2	130–180	150–200		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	○	●	○
1.3	140–160	130–180		1,0	1,0*	0,0382	0,0295	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	○	●	○
1.4	120–140	110–160		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
1.5	140–160	130–180		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
1.6	140–160	130–180		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
1.7	120–160	110–160		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
1.8	80–120	90–140		1,0	1,0*	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	○	●	○
1.9	80–120	90–140		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
1.10	80–120	90–140		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
1.11	80–120	90–140		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
1.12	80–120	90–140		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
1.13	80–120	90–140		1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	○	●	○
1.14	60–100	50–100		1,0	1,0*	0,020	0,016	0,011	0,027	0,021	0,015	0,034	0,026	0,019	0,040	0,031	0,023	○	●	○
1.15	80–120	90–140		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
1.16	100–140	110–160		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
2.1	**100–140**			1,0	1,0*	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	●		
2.2	**100–120**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
2.3	**80 –100**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
2.4	**80 –100**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
2.5	**100–120**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
2.6	**100–120**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
2.7	**40–60**			1,0	1,0*	0,020	0,016	0,011	0,027	0,021	0,015	0,034	0,026	0,019	0,038	0,029	0,021	●		
3.1		180–220		1,0	1,0*	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053		●	
3.2		160–200		1,0	1,0*	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053		●	
3.3		180 –220		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045		●	
3.4		160 –200		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045		●	
3.5		140 –180		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
3.6		120–160		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
3.7		140 –180		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
3.8		120 –160		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6	220–240	220–240		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
4.7	220–240	220–240		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
4.8	140–160	140–160		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
4.9	120–140	120–140		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
4.10	100–120	100–120		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
4.11	280–300	280–300		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,741	0,572	0,413	●		○
4.12	280–300	280–300		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	●		○
4.13																				
4.14	300–340	300–340		1,0	1,0*	0,058	0,045	0,033	0,108	0,083	0,060	0,135	0,104	0,075	0,162	0,125	0,090	●		○
4.15																				
4.16																				
4.17																				
4.18	80–120	80–120		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
4.19	60–80	60–80		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,021	0,025	0,054	0,042	0,030	●		
5.1	**30**			0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	●		
5.2	**30**			0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	●		
5.3	**25**			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
5.4	**25**			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
5.5	**25**			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
5.6	**25**			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
5.7	**45**			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
5.8	**30**			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
5.9	**80–100**			0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	●		
5.10	**60–80**			0,5	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
5.11	**60–80**			0,5	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
6.1		80–100		0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034		●	
6.2		80–120		0,3	0,3	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030		●	
6.3		60–80		0,15	0,15	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026		●	
6.4																				
6.5																				

* = with an a_p of 1.5 x DC the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: No. of teeth 3 = 5°/No. of teeth 4 = 4°/No. of teeth 5 = 3°

14

Cutting Data – MonsterMill – End Mills – ICR, short – long

	Emulsion	Compressed air	MMS	short	long	Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min			$a_{p\,max.}$ x DC		f_z mm			f_z mm			f_z mm			f_z mm		
1.1	130–180	150–200		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,18	0,14	0,10
1.2	130–180	150–200		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
1.3	140–160	130–180		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
1.4	120–140	110–160		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
1.5	140–160	130–180		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
1.6	140–160	130–180		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
1.7	120–160	110–160		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
1.8	80–120	90–140		1,0	1,0*	0,08	0,06	0,05	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08
1.9	80–120	90–140		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
1.10	80–120	90–140		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
1.11	80–120	90–140		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
1.12	80–120	90–140		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
1.13	80–120	90–140		1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
1.14	60–100	50–100		1,0	1,0*	0,05	0,04	0,03	0,07	0,05	0,04	0,11	0,08	0,06	0,09	0,07	0,05
1.15	80–120	90–140		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
1.16	100–140	110–160		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
2.1	**100–140**			1,0	1,0*	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
2.2	**100–120**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06
2.3	**80 –100**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
2.4	**80 –100**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
2.5	**100–120**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
2.6	**100–120**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
2.7	**40–60**			1,0	1,0*	0,05	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,05	0,09	0,07	0,05
3.1		180–220		1,0	1,0*	0,13	0,10	0,07	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12
3.2		160–200		1,0	1,0*	0,13	0,10	0,07	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12
3.3		180 –220		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,14	0,11	0,08	0,19	0,15	0,11
3.4		160 –200		1,0	1,0*	0,11	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,19	0,15	0,11
3.5		140 –180		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
3.6		120–160		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
3.7		140 –180		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
3.8		120 –160		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6	220–240	220–240		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
4.7	220–240	220–240		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
4.8	140–160	140–160		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
4.9	120–140	120–140		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
4.10	100–120	100–120		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
4.11	280–300	280–300		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
4.12	280–300	280–300		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
4.13																	
4.14	300–340	300–340		1,0	1,0*	0,22	0,17	0,12	0,27	0,21	0,15	0,32	0,25	0,18	0,38	0,29	0,21
4.15																	
4.16																	
4.17																	
4.18	80–120	80–120		1,0	1,0*	0,09	0,07	0,05	0,14	0,10	0,08	0,11	0,11	0,08	0,16	0,12	0,09
4.19	60–80	60–80		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
5.1	**30**			0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
5.2	**30**			0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,06	0,07	0,14	0,11	0,08
5.3	**25**			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
5.4	**25**			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
5.5	**25**			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,05	0,06	0,13	0,10	0,07
5.6	**25**			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,11	0,09	0,06
5.7	**45**			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
5.8	**30**			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
5.9	**80–100**			0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
5.10	**60–80**			0,5	0,5	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
5.11	**60–80**			0,5	0,5	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
6.1		80–100		0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
6.2		80–120		0,3	0,3	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
6.3		60–80		0,15	0,15	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
6.4																	
6.5																	

* = with an a_p of 1.5 x DC the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: No. of teeth 3 = 5° / No. of teeth 4 = 4° / No. of teeth 5 = 3°

Index	Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm					
1.1	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15	○	●	○
1.2	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
1.3	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
1.4	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.5	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.6	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.7	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.8	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
1.9	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.10	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.11	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.12	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.13	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	○	●	○
1.14	0,10	0,08	0,06	0,10	0,09	0,07	0,14	0,13	0,10	○	●	○
1.15	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.16	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
2.1	0,14	0,12	0,09	0,12	0,10	0,08	0,16	0,14	0,11	●		
2.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.3	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.4	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.5	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.6	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.7	0,10	0,08	0,06	0,10	0,09	0,07	0,11	0,09	0,08	●		
3.1	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
3.2	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
3.3	0,19	0,16	0,12	0,20	0,17	0,13	0,25	0,22	0,18		●	
3.4	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15		●	
3.5	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
3.6	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
3.7	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
3.8	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
4.1												
4.2												
4.3												
4.4												
4.5												
4.6	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.7	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.8	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.9	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.10	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.11	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
4.12	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
4.13												
4.14	0,38	0,31	0,24	0,41	0,35	0,27	0,43	0,38	0,30	●		○
4.15												
4.16												
4.17												
4.18	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
4.19	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.1	0,15	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
5.2	0,15	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
5.3	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.4	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.5	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.6	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.7	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
5.8	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
5.9	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
5.10	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
5.11	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
6.1	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11		●	
6.2	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10		●	
6.3	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09		●	
6.4												
6.5												

14

Cutting Data – MonsterMill – End Mills – ICR, extra long

Index	Emulsion v_c m/min	Compressed air v_c m/min	MMS v_c m/min	$a_{p\,max.}$ x DC		Ø DC = 3 mm f_z mm			Ø DC = 4 mm f_z mm			Ø DC = 5 mm f_z mm			Ø DC = 6 mm f_z mm			Ø DC = 8 mm f_z mm		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
1.1	110–155	130–180		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
1.2	110–155	130–180		1	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	0,10	0,08	0,06
1.3	120–140	110–160		1	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	0,10	0,08	0,06
1.4	100–120	90–140		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
1.5	120–140	110–160		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
1.6	120–140	110–160		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
1.7	100–140	90–140		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
1.8	70–105	70–120		1	0,5	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
1.9	70–105	70–120		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
1.10	70–105	70–120		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
1.11	70–105	70–120		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
1.12	70–105	70–120		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
1.13	70–105	70–120		1	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
1.14	55–85	50–80		1	0,5	0,020	0,016	0,011	0,027	0,021	0,015	0,034	0,026	0,019	0,040	0,031	0,023	0,05	0,04	0,03
1.15	70–105	70–120		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
1.16	85–120	90–140		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
2.1	**85–120**			1	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
2.2	**85–105**			1	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
2.3	**70–90**			1	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
2.4	**70–90**			1	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
2.5	**85–105**			1	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
2.6	**85–105**			1	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
2.7	**35–55**			1	0,5	0,020	0,016	0,011	0,027	0,021	0,015	0,034	0,026	0,019	0,038	0,029	0,021	0,05	0,04	0,03
3.1		150–190		1	0,5	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053	0,13	0,10	0,07
3.2		140–170		1	0,5	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053	0,13	0,10	0,07
3.3		150–190		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
3.4		140–170		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
3.5		120–150		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
3.6		105–140		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
3.7		120–150		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
3.8		105–140		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6	190–205	190–205		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
4.7	190–205	190–205		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
4.8	120–140	120–140		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
4.9	105–120	105–120		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
4.10	85–105	85–105		1	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
4.11	240–260	240–260		1	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,741	0,572	0,413	0,10	0,08	0,06
4.12	240–260	240–260		1	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	0,10	0,08	0,06
4.13																				
4.14	250–290	250–290		1	0,5	0,058	0,045	0,033	0,108	0,083	0,060	0,135	0,104	0,075	0,162	0,125	0,090	0,22	0,17	0,12
4.15																				
4.16																				
4.17																				
4.18	70–105	70–105		1	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
4.19	50–70	50–70		1	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,021	0,025	0,054	0,042	0,030	0,07	0,06	0,04
5.1	**27**			0,5	0,25	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
5.2	**27**			0,5	0,25	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
5.3	**23**			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
5.4	**23**			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
5.5	**23**			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
5.6	**23**			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
5.7	**38**			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
5.8	**27**			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
5.9	**70–85**			0,5	0,25	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
5.10	**50–70**			0,5	0,25	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
5.11	**50–70**			0,5	0,25	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
6.1		70–85		0,5*		0,031	0,024		0,040	0,031		0,052	0,040		0,061	0,047		0,08	0,06	
6.2		70–105		0,5*		0,027	0,021		0,036	0,028		0,045	0,035		0,054	0,042		0,07	0,06	
6.3		50–70		0,5*		0,025	0,019		0,031	0,024		0,040	0,031		0,047	0,036		0,06	0,05	
6.4																				
6.5																				

* = Edge Milling and Trochoidal Milling

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 ° / No. of teeth 4 = 4° / No. of teeth 5 = 3°

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,14	0,10	0,08	0,16	0,13	0,09	0,18	0,14	0,10	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15	○	●	○
1.2	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
1.3	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
1.4	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.5	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.6	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.7	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
1.8	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
1.9	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.10	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.11	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.12	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.13	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	○	●	○
1.14	0,07	0,05	0,04	0,11	0,08	0,06	0,09	0,07	0,05	0,10	0,08	0,06	0,10	0,09	0,07	0,14	0,13	0,10	○	●	○
1.15	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
1.16	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
2.1	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,12	0,10	0,08	0,16	0,14	0,11	●		
2.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.3	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.4	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.5	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.6	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
2.7	0,07	0,05	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,10	0,09	0,07	0,11	0,09	0,08	●		
3.1	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
3.2	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
3.3	0,14	0,10	0,08	0,14	0,11	0,08	0,19	0,15	0,11	0,19	0,16	0,12	0,20	0,17	0,13	0,25	0,22	0,18		●	
3.4	0,12	0,09	0,07	0,14	0,11	0,08	0,19	0,15	0,11	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15		●	
3.5	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
3.6	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
3.7	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
3.8	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
4.1																					
4.2																					
4.3																					
4.4																					
4.5																					
4.6	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.7	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.8	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.9	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.10	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
4.11	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
4.12	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
4.13																					
4.14	0,27	0,21	0,15	0,32	0,25	0,18	0,38	0,29	0,21	0,38	0,31	0,24	0,41	0,35	0,27	0,43	0,38	0,30	●		○
4.15																					
4.16																					
4.17																					
4.18	0,14	0,10	0,08	0,11	0,11	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
4.19	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.1	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,15	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
5.2	0,10	0,08	0,06	0,12	0,06	0,07	0,14	0,11	0,08	0,15	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
5.3	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.4	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.5	0,09	0,07	0,05	0,11	0,05	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.6	0,09	0,07	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
5.7	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
5.8	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
5.9	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
5.10	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
5.11	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
6.1	0,10	0,08		0,12	0,09		0,14	0,11		0,14	0,12		0,16	0,13		0,16	0,14			●	
6.2	0,09	0,07		0,11	0,08		0,13	0,10		0,13	0,10		0,14	0,12		0,14	0,13			●	
6.3	0,08	0,06		0,09	0,07		0,11	0,09		0,11	0,09		0,12	0,10		0,13	0,11			●	
6.4																					
6.5																					

14

Cutting data standard values – MonsterMill – TCR, end mills 52 503 ... / 52 504 ... /

	long	extra long	long	extra long	Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
					a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,06–0,1 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,06–0,1 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,06–0,1 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,06–0,1 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
2.1	110	88	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
2.2	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
2.3	80	64	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
2.4	80	64	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
2.5	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
2.6	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
2.7	55	44	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.1	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.2	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.3	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.4	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.5	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.6	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.7	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.8	**55**	**44**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.9	**120**	**96**	1,0	0,5	0,045	0,035	0,025	0,060	0,045	0,030	0,070	0,052	0,035	0,100	0,075	0,050
5.10	**100**	**80**	1,0	0,5	0,036	0,028	0,020	0,054	0,040	0,027	0,070	0,052	0,035	0,080	0,060	0,040
5.11	**80**	**64**	1,0	0,5	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,045	0,030

Cutting data standard values – MonsterMill – TCR, end mills 52 505 ... / 52 506 ...

	long	long	Ø DC = 4 mm		Ø DC = 5 mm		Ø DC = 6 mm		Ø DC = 8 mm		Ø DC = 10 mm		Ø DC = 12mm		Ø DC = 16 mm	
			a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
2.1	110	1,0	0,017	0,012	0,024	0,016	0,031	0,021	0,037	0,025	0,048	0,032	0,060	0,040	0,065	0,050
2.2	100	1,0	0,017	0,012	0,024	0,016	0,031	0,021	0,037	0,025	0,048	0,032	0,060	0,040	0,065	0,050
2.3	80	1,0	0,017	0,012	0,024	0,016	0,031	0,021	0,037	0,025	0,048	0,032	0,060	0,040	0,065	0,050
2.4	80	1,0	0,017	0,012	0,024	0,016	0,031	0,021	0,037	0,025	0,048	0,032	0,060	0,040	0,065	0,050
2.5	100	1,0	0,017	0,012	0,024	0,016	0,031	0,021	0,037	0,025	0,048	0,032	0,060	0,040	0,065	0,050
2.6	100	1,0	0,017	0,012	0,024	0,016	0,031	0,021	0,037	0,025	0,048	0,032	0,060	0,040	0,065	0,050
2.7	55	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.1	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.2	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.3	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.4	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.5	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.6	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.7	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.8	**55**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,075	0,050	0,077	0,060
5.9	**120**	1,0	0,035	0,025	0,045	0,030	0,052	0,035	0,075	0,050	0,089	0,060	0,104	0,070	0,077	0,060
5.10	**100**	1,0	0,028	0,020	0,040	0,027	0,052	0,035	0,060	0,040	0,075	0,050	0,089	0,060	0,077	0,060
5.11	**80**	1,0	0,021	0,015	0,030	0,020	0,037	0,025	0,045	0,030	0,060	0,040	0,075	0,050	0,077	0,060

52 507 ... / 52 508 ...

	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,06–0,1 x DC			
Index	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
2.1	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,050	0,111	0,090	0,070	●		
2.2	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,050	0,111	0,090	0,070	●		
2.3	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,050	0,111	0,090	0,070	●		
2.4	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,050	0,111	0,090	0,070	●		
2.5	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,050	0,111	0,090	0,070	●		
2.6	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,050	0,111	0,090	0,070	●		
2.7	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.1	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.2	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.3	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.4	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.5	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.6	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.7	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.8	0,100	0,075	0,050	0,100	0,075	0,050	0,101	0,077	0,060	0,111	0,090	0,070	●		
5.9	0,120	0,089	0,060	0,140	0,104	0,070	0,101	0,077	0,060	0,190	0,155	0,120	●		
5.10	0,100	0,075	0,050	0,120	0,089	0,060	0,101	0,077	0,060	0,158	0,129	0,100	●		
5.11	0,080	0,060	0,040	0,100	0,075	0,050	0,101	0,077	0,060	0,126	0,103	0,080	●		

	Ø DC = 20 mm		● 1st choice		○ suitable
	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC			
Index	f_z mm	f_z mm	Emulsion	Compressed air	MMS
2.1	0,090	0,070	●		
2.2	0,090	0,070	●		
2.3	0,090	0,070	●		
2.4	0,090	0,070	●		
2.5	0,090	0,070	●		
2.6	0,090	0,070	●		
2.7	0,090	0,070	●		
5.1	0,090	0,070	●		
5.2	0,090	0,070	●		
5.3	0,090	0,070	●		
5.4	0,090	0,070	●		
5.5	0,090	0,070	●		
5.6	0,090	0,070	●		
5.7	0,090	0,070	●		
5.8	0,090	0,070	●		
5.9	0,155	0,120	●		
5.10	0,129	0,100	●		
5.11	0,103	0,080	●		

Cutting data standard values – MonsterMill – TCR, ball-nosed end mills 52 513 ... /

	long	extra long		Ø DC = 2 mm		Ø DC = 3 mm		Ø DC = 4 mm		Ø DC = 5 mm		Ø DC = 6 mm		Ø DC = 8 mm	
				a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
2.1	**60**	**55**	0,1–0,2	0,009	0,007	0,011	0,008	0,012	0,009	0,012	0,009	0,018	0,014	0,029	0,023
2.2	**55**	**50**	0,1–0,2	0,009	0,007	0,011	0,008	0,012	0,009	0,012	0,009	0,018	0,014	0,029	0,023
2.3	**45**	**40**	0,1–0,2	0,009	0,007	0,011	0,008	0,012	0,009	0,012	0,009	0,018	0,014	0,029	0,023
2.4	**45**	**40**	0,1–0,2	0,009	0,007	0,011	0,008	0,012	0,009	0,012	0,009	0,018	0,014	0,029	0,023
2.5	**55**	**50**	0,1–0,2	0,009	0,007	0,011	0,008	0,012	0,009	0,012	0,009	0,018	0,014	0,029	0,023
2.6	**55**	**50**	0,1–0,2	0,009	0,007	0,010	0,008	0,012	0,010	0,012	0,010	0,020	0,015	0,025	0,020
2.7	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.1	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.2	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.3	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.4	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.5	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.6	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.7	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.8	**33**	**28**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030
5.9	**65**	**60**	0,1–0,2	0,017	0,013	0,020	0,014	0,022	0,017	0,022	0,017	0,034	0,025	0,053	0,042
5.10	**55**	**50**	0,1–0,2	0,014	0,011	0,017	0,012	0,019	0,014	0,019	0,014	0,029	0,022	0,046	0,036
5.11	**45**	**40**	0,1–0,2	0,012	0,009	0,014	0,010	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,030

Cutting data standard values – MonsterMill – TCR, torus cutters 52 511 ... / 52 512 ...

	long	extra long		Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm	● 1st choice		○ suitable
				a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	a_e 0,01–1,0 x DC	Emulsion	Compressed air	MMS
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
2.1	**120**	**110**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
2.2	**110**	**100**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
2.3	**90**	**80**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
2.4	**90**	**80**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
2.5	**110**	**100**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
2.6	**110**	**100**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
2.7															
5.1	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.2	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.3	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.4	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.5	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.6	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.7	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.8	**65**	**55**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		
5.9	**130**	**120**	0,06	0,040	0,060	0,070	0,090	0,120	0,150	0,180	0,210	0,300	●		
5.10	**110**	**100**	0,06	0,030	0,040	0,060	0,080	0,100	0,120	0,150	0,180	0,240	●		
5.11	**90**	**80**	0,06	0,015	0,040	0,055	0,065	0,075	0,100	0,120	0,150	0,180	●		

52 514 ...

	Ø DC = 10 mm		Ø DC = 12 mm		Ø DC = 16 mm		● 1st choice		○ suitable
	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC			
Index	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
2.1	0,032	0,025	0,035	0,030	0,039	0,034	●		
2.2	0,032	0,025	0,035	0,030	0,039	0,034	●		
2.3	0,032	0,025	0,035	0,030	0,039	0,034	●		
2.4	0,032	0,025	0,035	0,030	0,039	0,034	●		
2.5	0,032	0,025	0,035	0,030	0,039	0,034	●		
2.6	0,030	0,025	0,035	0,030	0,040	0,035	●		
2.7	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.1	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.2	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.3	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.4	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.5	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.6	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.7	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.8	0,042	0,033	0,047	0,040	0,052	0,045	●		
5.9	0,059	0,046	0,066	0,056	0,073	0,063	●		
5.10	0,050	0,040	0,056	0,048	0,062	0,054	●		
5.11	0,042	0,033	0,047	0,040	0,052	0,045	●		

Cutting data standard values – MonsterMill – Ball-nosed end mills – HCR, 53 600 ... /

$T_x \leq 2,5$ x DC

Index	v_c m/min	$a_{p\,max}$ x DC	Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,05 x DC									
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
1.15	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
1.16	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
6.1	200	0,05	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
6.2	180	0,05	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
6.3	160	0,05	**0,002**	**0,005**	**0,006**	**0,008**	**0,012**	**0,014**	**0,017**	**0,022**	**0,026**	**0,029**
6.4	150	0,03	**0,002**	**0,004**	**0,005**	**0,007**	**0,010**	**0,012**	**0,014**	**0,018**	**0,022**	**0,024**
6.5	130	0,03	**0,002**	**0,003**	**0,004**	**0,006**	**0,008**	**0,010**	**0,011**	**0,014**	**0,018**	**0,019**

T_x = 2,6–5 x DC

Index	v_c m/min	$a_{p\,max}$ x DC	Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,05 x DC									
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
1.15	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
1.16	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
6.1	120	0,05	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
6.2	108	0,05	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
6.3	96	0,05	**0,002**	**0,004**	**0,005**	**0,007**	**0,010**	**0,011**	**0,014**	**0,017**	**0,020**	**0,023**
6.4	90	0,03	**0,002**	**0,003**	**0,004**	**0,006**	**0,008**	**0,010**	**0,012**	**0,015**	**0,017**	**0,019**
6.5	78	0,03	**0,001**	**0,002**	**0,003**	**0,004**	**0,006**	**0,008**	**0,009**	**0,012**	**0,014**	**0,015**

T_x = 5,1–10 x DC

Index	v_c m/min	$a_{p\,max}$ x DC	Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,05 x DC									
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
1.15	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
1.16	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
6.1	90	0,04	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
6.2	81	0,04	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
6.3	72	0,04	**0,001**	**0,002**	**0,004**	**0,005**	**0,007**	**0,008**	**0,011**	**0,013**	**0,014**	**0,017**
6.4	68	0,02	**0,001**	**0,002**	**0,003**	**0,004**	**0,006**	**0,007**	**0,009**	**0,011**	**0,012**	**0,014**
6.5	59	0,02	**0,001**	**0,002**	**0,002**	**0,003**	**0,005**	**0,006**	**0,007**	**0,009**	**0,010**	**0,011**

T_x = 10,1–15 x DC

Index	v_c m/min	$a_{p\,max}$ x DC	Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,04 x DC									
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
1.15	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
1.16	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
6.1	70	0,03	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
6.2	63	0,03	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
6.3	56	0,03	**0,001**	**0,001**	**0,002**	**0,004**	**0,005**	**0,006**	**0,007**	**0,008**	**0,010**	**0,012**
6.4	53	0,01	**0,001**	**0,001**	**0,002**	**0,003**	**0,004**	**0,005**	**0,006**	**0,007**	**0,008**	**0,010**
6.5	46	0,01	**0,001**	**0,001**	**0,002**	**0,002**	**0,003**	**0,004**	**0,005**	**0,006**	**0,006**	**0,008**

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30 %!

53 601 ...

$T_x \leq 2,5 \times DC$

			Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	200	0,07	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
1.15	200	0,07	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
1.16	200	0,07	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
6.1	200	0,05	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
6.2	180	0,05	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
6.3	160	0,05	**0,036**	**0,043**	**0,058**	**0,086**	**0,115**	**0,144**	**0,173**	○	●	●
6.4	150	0,03	**0,030**	**0,036**	**0,048**	**0,072**	**0,096**	**0,120**	**0,144**	○	●	●
6.5	130	0,03	**0,024**	**0,029**	**0,038**	**0,058**	**0,077**	**0,096**	**0,115**	○	●	●

$T_x = 2,6–5 \times DC$

			Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	120	0,07	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
1.15	120	0,07	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
1.16	120	0,07	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
6.1	120	0,05	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
6.2	108	0,05	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
6.3	96	0,05	**0,029**	**0,035**	**0,046**	**0,060**	**0,084**	**0,107**	**0,130**	○	●	●
6.4	90	0,03	**0,024**	**0,029**	**0,039**	**0,050**	**0,070**	**0,089**	**0,108**	○	●	●
6.5	78	0,03	**0,019**	**0,023**	**0,031**	**0,040**	**0,056**	**0,071**	**0,086**	○	●	●

$T_x = 5,1–10 \times DC$

			Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	90	0,06	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
1.15	90	0,06	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
1.16	90	0,06	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
6.1	90	0,04	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
6.2	81	0,04	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
6.3	72	0,04	**0,022**	**0,026**	**0,035**	**0,035**	**0,052**	**0,069**	**0,086**	○	●	●
6.4	68	0,02	**0,018**	**0,022**	**0,029**	**0,029**	**0,043**	**0,058**	**0,072**	○	●	●
6.5	59	0,02	**0,014**	**0,018**	**0,023**	**0,023**	**0,035**	**0,046**	**0,058**	○	●	●

$T_x = 10,1–15 \times DC$

			Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,04 x DC		a_e 0,05 x DC							
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	70	0,05	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
1.15	70	0,05	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
1.16	70	0,05	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
6.1	70	0,03	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
6.2	63	0,03	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
6.3	56	0,03	**0,017**	**0,022**	**0,028**	**0,028**	**0,041**	**0,055**	**0,069**	○	●	●
6.4	53	0,01	**0,014**	**0,018**	**0,023**	**0,023**	**0,035**	**0,046**	**0,058**	○	●	●
6.5	46	0,01	**0,011**	**0,014**	**0,019**	**0,018**	**0,028**	**0,037**	**0,046**	○	●	●

Cutting data standard values – MonsterMill – End mills – HCR, 53 603 ... and 53 604 ...

Peripheral milling

			$T_x \leq 2,5 \times DC$									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
1.15	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
1.16	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
6.1	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
6.2	170	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
6.3	160	1,0	**0,005**	**0,005**	**0,010**	**0,010**	**0,014**	**0,014**	**0,019**	**0,024**	**0,029**	**0,034**
6.4	150	1,0	**0,004**	**0,004**	**0,008**	**0,008**	**0,012**	**0,012**	**0,016**	**0,020**	**0,024**	**0,028**
6.5	110	1,0	**0,003**	**0,003**	**0,006**	**0,006**	**0,010**	**0,010**	**0,013**	**0,016**	**0,019**	**0,022**

Z-layer milling / face milling

			$T_x \leq 2,5 \times DC$									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,3 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
1.15	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
1.16	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
6.1	120	0,05	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
6.2	110	0,05	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
6.3	100	0,05	**0,002**	**0,002**	**0,005**	**0,005**	**0,007**	**0,007**	**0,010**	**0,012**	**0,014**	**0,017**
6.4	80	0,03	**0,002**	**0,002**	**0,004**	**0,004**	**0,006**	**0,006**	**0,008**	**0,010**	**0,012**	**0,014**
6.5	60	0,03	**0,002**	**0,002**	**0,003**	**0,003**	**0,005**	**0,005**	**0,006**	**0,008**	**0,010**	**0,011**

Full slot

			$T_x \leq 2,5 \times DC$									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 1,0 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
1.15	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
1.16	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
6.1	65	0,05	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
6.2	55	0,05	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
6.3	45	0,05	**0,001**	**0,001**	**0,003**	**0,003**	**0,004**	**0,005**	**0,006**	**0,007**	**0,008**	**0,010**

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30 %!

$T_x \leq 2,5 \times DC$

Peripheral milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC							Emulsion	Compressed air	MMS
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	200	1,0	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
1.15	200	1,0	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
1.16	200	1,0	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
6.1	200	1,0	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
6.2	170	1,0	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
6.3	160	1,0	**0,043**	**0,048**	**0,067**	**0,101**	**0,134**	**0,168**	**0,192**	○	●	●
6.4	150	1,0	**0,036**	**0,040**	**0,056**	**0,084**	**0,112**	**0,140**	**0,160**	○	●	●
6.5	110	1,0	**0,029**	**0,032**	**0,045**	**0,067**	**0,090**	**0,112**	**0,128**	○	●	●

$T_x \leq 2,5 \times DC$

Z-layer milling / face milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,3 x DC							Emulsion	Compressed air	MMS
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	120	0,07	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
1.15	120	0,07	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
1.16	120	0,07	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.1	120	0,05	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.2	110	0,05	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.3	100	0,05	**0,022**	**0,024**	**0,034**	**0,050**	**0,067**	**0,084**	**0,096**	○	●	●
6.4	80	0,03	**0,018**	**0,020**	**0,028**	**0,042**	**0,056**	**0,070**	**0,080**	○	●	●
6.5	60	0,03	**0,014**	**0,016**	**0,022**	**0,034**	**0,045**	**0,056**	**0,064**	○	●	●

$T_x \leq 2,5 \times DC$

Full slot

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 1,0 x DC							Emulsion	Compressed air	MMS
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	70	0,07	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
1.15	70	0,07	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
1.16	70	0,07	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
6.1	65	0,05	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
6.2	55	0,05	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
6.3	45	0,05	**0,012**	**0,015**	**0,020**	**0,030**	**0,033**	**0,035**	**0,040**	○	●	●

Cutting data standard values – MonsterMill – End mills – HCR, 53 603 ... and 53 604 ...

Peripheral milling

			T_x = 2,6–5 x DC									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
1.15	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
1.16	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
6.1	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
6.2	119	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
6.3	112	1,0	**0,004**	**0,004**	**0,007**	**0,007**	**0,011**	**0,011**	**0,014**	**0,018**	**0,022**	**0,025**
6.4	105	1,0	**0,003**	**0,003**	**0,006**	**0,006**	**0,009**	**0,009**	**0,012**	**0,015**	**0,018**	**0,021**
6.5	77	1,0	**0,002**	**0,002**	**0,005**	**0,005**	**0,007**	**0,007**	**0,010**	**0,012**	**0,014**	**0,017**

Z-layer milling / face milling

			T_x = 2,6–5 x DC									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,3 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
1.15	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
1.16	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
6.1	84	0,05	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
6.2	77	0,05	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
6.3	70	0,05	**0,002**	**0,002**	**0,004**	**0,004**	**0,005**	**0,005**	**0,007**	**0,009**	**0,011**	**0,013**
6.4	56	0,03	**0,002**	**0,002**	**0,003**	**0,003**	**0,005**	**0,005**	**0,006**	**0,008**	**0,009**	**0,011**
6.5	42	0,03	**0,001**	**0,001**	**0,002**	**0,002**	**0,004**	**0,004**	**0,005**	**0,006**	**0,007**	**0,008**

Full slot

			T_x = 2,6–5 x DC									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 1,0 x DC									
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
1.15	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
1.16	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
6.1	46	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
6.2	39	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
6.3	32	0,05	**0,001**	**0,001**	**0,002**	**0,002**	**0,003**	**0,003**	**0,004**	**0,005**	**0,006**	**0,007**

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30 %!

T_x = 2,6–5 x DC

Peripheral milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice: Emulsion	● 1st choice: Compressed air	● 1st choice: MMS	○ suitable: Emulsion	○ suitable: Compressed air	○ suitable: MMS
			a_e 0,05 x DC												
			f_z mm												
1.14	140	1,0	0,041	0,045	0,063	0,095	0,126	0,158	0,180		●	●	○		
1.15	140	1,0	0,041	0,045	0,063	0,095	0,126	0,158	0,180		●	●	○		
1.16	140	1,0	0,041	0,045	0,063	0,095	0,126	0,158	0,180		●	●	○		
6.1	140	1,0	0,041	0,045	0,063	0,095	0,126	0,158	0,180		●	●	○		
6.2	119	1,0	0,041	0,045	0,063	0,095	0,126	0,158	0,180		●	●	○		
6.3	112	1,0	**0,032**	**0,036**	**0,050**	**0,076**	**0,101**	**0,126**	**0,144**		●	●	○		
6.4	105	1,0	**0,027**	**0,030**	**0,042**	**0,063**	**0,084**	**0,105**	**0,120**		●	●	○		
6.5	77	1,0	**0,022**	**0,024**	**0,034**	**0,050**	**0,067**	**0,084**	**0,096**		●	●	○		

T_x = 2,6–5 x DC

Z-layer milling / face milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice: Emulsion	● 1st choice: Compressed air	● 1st choice: MMS	○ suitable: Emulsion	○ suitable: Compressed air	○ suitable: MMS
			a_e 0,3 x DC												
			f_z mm												
1.14	84	0,07	0,020	0,023	0,032	0,047	0,063	0,079	0,090		●	●	○		
1.15	84	0,07	0,020	0,023	0,032	0,047	0,063	0,079	0,090		●	●	○		
1.16	84	0,07	0,020	0,023	0,032	0,047	0,063	0,079	0,090		●	●	○		
6.1	84	0,05	0,020	0,023	0,032	0,047	0,063	0,079	0,090		●	●	○		
6.2	77	0,05	0,020	0,023	0,032	0,047	0,063	0,079	0,090		●	●	○		
6.3	70	0,05	**0,016**	**0,018**	**0,025**	**0,038**	**0,050**	**0,063**	**0,072**		●	●	○		
6.4	56	0,03	**0,014**	**0,015**	**0,021**	**0,032**	**0,042**	**0,053**	**0,060**		●	●	○		
6.5	42	0,03	**0,011**	**0,012**	**0,017**	**0,025**	**0,034**	**0,042**	**0,048**		●	●	○		

T_x = 2,6–5 x DC

Full slot

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice: Emulsion	● 1st choice: Compressed air	● 1st choice: MMS	○ suitable: Emulsion	○ suitable: Compressed air	○ suitable: MMS
			a_e 1,0 x DC												
			f_z mm												
1.14	49	0,07	0,014	0,015	0,021	0,032	0,042	0,053	0,060		●	●	○		
1.15	49	0,07	0,014	0,015	0,021	0,032	0,042	0,053	0,060		●	●	○		
1.16	49	0,07	0,014	0,015	0,021	0,032	0,042	0,053	0,060		●	●	○		
6.1	46	0,05	0,014	0,015	0,021	0,032	0,042	0,053	0,060		●	●	○		
6.2	39	0,05	0,014	0,015	0,021	0,032	0,042	0,053	0,060		●	●	○		
6.3	32	0,05	**0,009**	**0,010**	**0,014**	**0,021**	**0,028**	**0,035**	**0,040**		●	●	○		

Cutting data standard values – MonsterMill – End mills – HCR, 53 603 ... and 53 604 ...

Peripheral milling

			T_x = 5,1–10 x DC									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
1.15	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
1.16	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
6.1	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
6.2	94	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
6.3	88	0,75	**0,002**	**0,002**	**0,005**	**0,005**	**0,007**	**0,007**	**0,010**	**0,012**	**0,014**	**0,017**
6.4	83	0,75	**0,002**	**0,002**	**0,004**	**0,004**	**0,006**	**0,006**	**0,008**	**0,010**	**0,012**	**0,014**
6.5	61	0,75	**0,002**	**0,002**	**0,003**	**0,003**	**0,005**	**0,005**	**0,006**	**0,008**	**0,010**	**0,011**

Z-layer milling / face milling

			T_x = 5,1–10 x DC									
			Ø DC = 0,2 mm	Ø DC = 0,3 mm	Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm
			a_e 0,3 x DC									
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
1.15	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
1.16	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
6.1	66	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
6.2	61	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
6.3	55	0,05	**0,001**	**0,001**	**0,002**	**0,002**	**0,004**	**0,004**	**0,005**	**0,006**	**0,007**	**0,008**
6.4	44	0,03	**0,001**	**0,001**	**0,002**	**0,002**	**0,003**	**0,003**	**0,004**	**0,005**	**0,006**	**0,007**
6.5	33	0,03	**0,001**	**0,001**	**0,002**	**0,002**	**0,002**	**0,002**	**0,003**	**0,004**	**0,005**	**0,006**

Peripheral milling

			T_x = 10,1–15 x DC									
			Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm	Ø DC = 2,5 mm	Ø DC = 3 mm
			a_e 0,05 x DC									
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024
1.15	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024
1.16	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024
6.1	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024
6.2	77	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024
6.3	72	0,5	**0,004**	**0,004**	**0,006**	**0,006**	**0,008**	**0,010**	**0,012**	**0,013**	**0,017**	**0,019**
6.4	68	0,5	**0,003**	**0,003**	**0,005**	**0,005**	**0,006**	**0,008**	**0,010**	**0,011**	**0,014**	**0,016**
6.5	50	0,5	**0,003**	**0,003**	**0,004**	**0,004**	**0,005**	**0,006**	**0,008**	**0,009**	**0,012**	**0,013**

Z-layer milling / face milling

			T_x = 10,1–15 x DC									
			Ø DC = 0,4–0,5 mm	Ø DC = 0,6–0,7 mm	Ø DC = 0,8–0,9 mm	Ø DC = 1 mm	Ø DC = 1,2–1,4 mm	Ø DC = 1,5 mm	Ø DC = 1,6–1,8 mm	Ø DC = 2 mm	Ø DC = 2,5 mm	Ø DC = 3 mm
			a_e 0,3 x DC									
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	54	0,05	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008	0,011	0,012
1.15	54	0,05	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008	0,011	0,012
1.16	54	0,05	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008	0,011	0,012
6.1	54	0,03	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008	0,011	0,012
6.2	50	0,03	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008	0,011	0,012
6.3	45	0,03	**0,002**	**0,002**	**0,003**	**0,003**	**0,004**	**0,005**	**0,006**	**0,007**	**0,009**	**0,010**
6.4	36	0,01	**0,002**	**0,002**	**0,002**	**0,002**	**0,003**	**0,004**	**0,005**	**0,006**	**0,007**	**0,008**
6.5	27	0,01	**0,001**	**0,001**	**0,002**	**0,002**	**0,003**	**0,003**	**0,004**	**0,004**	**0,006**	**0,006**

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30 %!

T_x = 5,1–10 x DC

Peripheral milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC							Emulsion	Compressed air	MMS
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	110	0,75	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
1.15	110	0,75	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
1.16	110	0,75	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.1	110	0,75	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.2	94	0,75	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.3	88	0,75	**0,022**	**0,024**	**0,034**	**0,050**	**0,067**	**0,084**	**0,096**	○	●	●
6.4	83	0,75	**0,018**	**0,020**	**0,028**	**0,042**	**0,056**	**0,070**	**0,080**	○	●	●
6.5	61	0,75	**0,014**	**0,016**	**0,022**	**0,034**	**0,045**	**0,056**	**0,064**	○	●	●

T_x = 5,1–10 x DC

Z-layer milling / face milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 2,5 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,3 x DC							Emulsion	Compressed air	MMS
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	66	0,07	**0,014**	**0,015**	**0,021**	**0,032**	**0,042**	**0,053**	**0,060**	○	●	●
1.15	66	0,07	**0,014**	**0,015**	**0,021**	**0,032**	**0,042**	**0,053**	**0,060**	○	●	●
1.16	66	0,07	**0,014**	**0,015**	**0,021**	**0,032**	**0,042**	**0,053**	**0,060**	○	●	●
6.1	66	0,05	**0,014**	**0,015**	**0,021**	**0,032**	**0,042**	**0,053**	**0,060**	○	●	●
6.2	61	0,05	**0,014**	**0,015**	**0,021**	**0,032**	**0,042**	**0,053**	**0,060**	○	●	●
6.3	55	0,05	**0,011**	**0,012**	**0,017**	**0,025**	**0,034**	**0,042**	**0,048**	○	●	●
6.4	44	0,03	**0,009**	**0,010**	**0,014**	**0,021**	**0,028**	**0,035**	**0,040**	○	●	●
6.5	33	0,03	**0,007**	**0,008**	**0,011**	**0,017**	**0,022**	**0,028**	**0,032**	○	●	●

T_x = 10,1–15 x DC

Peripheral milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 4mm	● 1st choice		○ suitable
			a_e 0,05 x DC	Emulsion	Compressed air	MMS
			f_z mm			
1.14	90	0,5	0,034	○	●	●
1.15	90	0,5	0,034	○	●	●
1.16	90	0,5	0,034	○	●	●
6.1	90	0,5	0,034	○	●	●
6.2	77	0,5	0,034	○	●	●
6.3	72	0,5	**0,027**	○	●	●
6.4	68	0,5	**0,022**	○	●	●
6.5	50	0,5	**0,018**	○	●	●

T_x = 10,1–15 x DC

Z-layer milling / face milling

Index	v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 4 mm	● 1st choice		○ suitable
			a_e 0,3 x DC	Emulsion	Compressed air	MMS
			f_z mm			
1.14	54	0,05	0,017	○	●	●
1.15	54	0,05	0,017	○	●	●
1.16	54	0,05	0,017	○	●	●
6.1	54	0,03	0,017	○	●	●
6.2	50	0,03	0,017	○	●	●
6.3	45	0,03	**0,013**	○	●	●
6.4	36	0,01	**0,011**	○	●	●
6.5	27	0,01	**0,009**	○	●	●

Cutting data standard values – MonsterMill – End mills – HCR, 53 605 ...

Peripheral milling

			$T_x \leq 2 \times DC$										
			Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC										
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
1.15	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
1.16	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
6.1	190	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
6.2	160	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
6.3	130	2,0	**0,014**	**0,022**	**0,030**	**0,041**	**0,060**	**0,074**	**0,096**	**0,108**	○	●	●
6.4	120	2,0	**0,012**	**0,018**	**0,025**	**0,034**	**0,050**	**0,062**	**0,080**	**0,090**	○	●	●
6.5	110	2,0	**0,010**	**0,014**	**0,020**	**0,027**	**0,040**	**0,050**	**0,064**	**0,072**	○	●	●

Face milling

			$T_x \leq 2 \times DC$										
			Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC										
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
1.15	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
1.16	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.1	120	0,05	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.2	110	0,05	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
6.3	90	0,05	**0,012**	**0,017**	**0,024**	**0,034**	**0,050**	**0,067**	**0,084**	**0,096**	○	●	●
6.4	75	0,03	**0,010**	**0,014**	**0,020**	**0,028**	**0,042**	**0,056**	**0,070**	**0,080**	○	●	●
6.5	60	0,03	**0,008**	**0,011**	**0,016**	**0,022**	**0,034**	**0,045**	**0,056**	**0,064**	○	●	●

Cutting data standard values – MonsterMill – End mills – HCR, 53 606 ...

Peripheral milling

			$T_x \leq 3 \times DC$										
			Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC		a_e 0,04 x DC								
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
1.15	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
1.16	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
6.1	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
6.2	119	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
6.3	112	2,0	**0,011**	**0,019**	**0,026**	**0,036**	**0,053**	**0,066**	**0,084**	**0,096**	○	●	●
6.4	105	2,0	**0,009**	**0,016**	**0,022**	**0,030**	**0,044**	**0,055**	**0,070**	**0,080**	○	●	●
6.5	77	2,0	**0,007**	**0,013**	**0,018**	**0,024**	**0,035**	**0,044**	**0,056**	**0,064**	○	●	●

Face milling

			$T_x \leq 3 \times DC$										
			Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC		a_e 0,04 x DC								
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.14	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
1.15	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
1.16	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
6.1	91	0,05	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
6.2	84	0,05	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
6.3	77	0,05	**0,007**	**0,011**	**0,018**	**0,029**	**0,043**	**0,058**	**0,072**	**0,084**	○	●	●
6.4	63	0,03	**0,006**	**0,009**	**0,015**	**0,024**	**0,036**	**0,048**	**0,060**	**0,070**	○	●	●
6.5	42	0,03	**0,005**	**0,007**	**0,012**	**0,019**	**0,029**	**0,038**	**0,048**	**0,056**	○	●	●

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30 %!

Cutting data standard values – MonsterMill – Ball-nosed end mills – HCR, 53 602 ...

			$T_x \leq 2,5$ x DC								
			Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC						Emulsion	Compressed air	MMS
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
1.15	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
1.16	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
6.1	200	0,05	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
6.2	180	0,05	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
6.3	160	0,05	**0,030**	**0,040**	**0,060**	**0,081**	**0,101**	**0,121**	○	●	●
6.4	150	0,03	**0,025**	**0,034**	**0,050**	**0,067**	**0,084**	**0,101**	○	●	●
6.5	130	0,03	**0,020**	**0,027**	**0,040**	**0,054**	**0,067**	**0,081**	○	●	●

			$T_x = 2,6–5$ x DC								
			Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,05 x DC						Emulsion	Compressed air	MMS
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	120	0,07	0,030	0,040	0,053	0,073	0,093	0,113	○	●	●
1.15	120	0,07	0,030	0,040	0,053	0,073	0,093	0,113	○	●	●
1.16	120	0,07	0,030	0,040	0,053	0,073	0,093	0,113	○	●	●
6.1	120	0,05	0,030	0,040	0,053	0,073	0,093	0,113	○	●	●
6.2	108	0,05	0,030	0,040	0,053	0,073	0,093	0,113	○	●	●
6.3	96	0,05	**0,024**	**0,032**	**0,042**	**0,058**	**0,075**	**0,091**	○	●	●
6.4	90	0,03	**0,020**	**0,027**	**0,035**	**0,049**	**0,062**	**0,076**	○	●	●
6.5	78	0,03	**0,016**	**0,022**	**0,028**	**0,039**	**0,050**	**0,060**	○	●	●

			$T_x = 5,1–10$ x DC								
			Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	● 1st choice		○ suitable
			a_e 0,04 x DC						Emulsion	Compressed air	MMS
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.14	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
1.15	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
1.16	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
6.1	90	0,04	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
6.2	81	0,04	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
6.3	72	0,04	**0,018**	**0,024**	**0,024**	**0,036**	**0,048**	**0,060**	○	●	●
6.4	68	0,02	**0,015**	**0,020**	**0,020**	**0,030**	**0,040**	**0,050**	○	●	●
6.5	59	0,02	**0,012**	**0,016**	**0,016**	**0,024**	**0,032**	**0,040**	○	●	●

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30 %!

Cutting data standard values– MonsterMill – End mills – PCR-UNI

	Type short / long / extra long		Ø DC = 5,7–6,0 mm			Ø DC = 6,7–7,0 mm			Ø DC = 7,7–8,0 mm			Ø DC = 8,7–9,0 mm			Ø DC = 9,7–10,0 mm			Ø DC = 11,7–12,0 mm		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	**220**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.2	**220**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.3	**220**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.4	**200**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.5	**220**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.6	**180**	1,0	0,069	0,054	0,038	0,080	0,062	0,044	0,089	0,069	0,049	0,100	0,078	0,055	0,110	0,085	0,060	0,128	0,099	0,070
1.7	**200**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.8	**140**	1,0	0,062	0,048	0,034	0,071	0,055	0,039	0,080	0,062	0,044	0,089	0,069	0,049	0,097	0,075	0,053	0,113	0,088	0,062
1.9	**135**	1,0	0,060	0,047	0,033	0,069	0,054	0,038	0,079	0,061	0,043	0,088	0,068	0,048	0,095	0,074	0,052	0,111	0,086	0,061
1.10	**200**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
1.11	**140**	1,0	0,062	0,048	0,034	0,071	0,055	0,039	0,080	0,062	0,044	0,089	0,069	0,049	0,097	0,075	0,053	0,113	0,088	0,062
1.12	**130**	1,0	0,071	0,055	0,039	0,082	0,064	0,045	0,091	0,071	0,050	0,102	0,079	0,056	0,111	0,086	0,061	0,130	0,100	0,071
1.13	**110**	1,0	0,066	0,051	0,036	0,075	0,058	0,041	0,084	0,065	0,046	0,093	0,072	0,051	0,102	0,079	0,056	0,119	0,092	0,065
1.14	**110**	1,0	0,066	0,051	0,036	0,075	0,058	0,041	0,084	0,065	0,046	0,093	0,072	0,051	0,102	0,079	0,056	0,119	0,092	0,065
1.15	**110**	1,0	0,066	0,051	0,036	0,075	0,058	0,041	0,084	0,065	0,046	0,093	0,072	0,051	0,102	0,079	0,056	0,119	0,092	0,065
1.16	**130**	1,0	0,071	0,055	0,039	0,082	0,064	0,045	0,093	0,072	0,051	0,104	0,081	0,057	0,113	0,088	0,062	0,131	0,102	0,072
2.1	60	1,0	0,044	0,034	0,024	0,049	0,038	0,027	0,057	0,044	0,031	0,062	0,048	0,034	0,068	0,052	0,037	0,080	0,062	0,044
2.2	65	1,0	0,047	0,037	0,026	0,055	0,042	0,030	0,060	0,047	0,033	0,068	0,052	0,037	0,075	0,058	0,041	0,086	0,066	0,047
2.3	65	1,0	0,047	0,037	0,026	0,055	0,042	0,030	0,060	0,047	0,033	0,068	0,052	0,037	0,075	0,058	0,041	0,086	0,066	0,047
2.4	65	1,0	0,047	0,037	0,026	0,055	0,042	0,030	0,060	0,047	0,033	0,068	0,052	0,037	0,075	0,058	0,041	0,086	0,066	0,047
2.5	55	1,0	0,037	0,028	0,020	0,042	0,033	0,023	0,047	0,037	0,026	0,051	0,040	0,028	0,057	0,044	0,031	0,066	0,051	0,036
2.6	60	1,0	0,044	0,034	0,024	0,049	0,038	0,027	0,057	0,044	0,031	0,062	0,048	0,034	0,068	0,052	0,037	0,080	0,062	0,044
2.7	60	1,0	0,038	0,030	0,021	0,042	0,033	0,023	0,047	0,037	0,026	0,053	0,041	0,029	0,058	0,045	0,032	0,068	0,052	0,037
3.1	**240**	1,0	0,124	0,096	0,068	0,142	0,110	0,078	0,161	0,124	0,088	0,177	0,137	0,097	0,195	0,151	0,107	0,226	0,175	0,124
3.2	**180**	1,0	0,088	0,068	0,048	0,100	0,078	0,055	0,113	0,088	0,062	0,124	0,096	0,068	0,137	0,106	0,075	0,159	0,123	0,087
3.3	**220**	1,0	0,106	0,082	0,058	0,122	0,095	0,067	0,137	0,106	0,075	0,152	0,117	0,083	0,166	0,129	0,091	0,194	0,150	0,106
3.4	**180**	1,0	0,088	0,068	0,048	0,100	0,078	0,055	0,113	0,088	0,062	0,124	0,096	0,068	0,137	0,106	0,075	0,159	0,123	0,087
3.5	**160**	1,0	0,088	0,068	0,048	0,100	0,078	0,055	0,113	0,088	0,062	0,124	0,096	0,068	0,137	0,106	0,075	0,159	0,123	0,087
3.6	**150**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
3.7	**160**	1,0	0,088	0,068	0,048	0,100	0,078	0,055	0,113	0,088	0,062	0,124	0,096	0,068	0,137	0,106	0,075	0,159	0,123	0,087
3.8	**150**	1,0	0,075	0,058	0,041	0,086	0,066	0,047	0,097	0,075	0,053	0,106	0,082	0,058	0,117	0,091	0,064	0,137	0,106	0,075
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6																				
4.7																				
4.8																				
4.9																				
4.10																				
4.11																				
4.12																				
4.13																				
4.14																				
4.15																				
4.16																				
4.17																				
4.18																				
4.19																				
5.1																				
5.2																				
5.3																				
5.4																				
5.5																				
5.6																				
5.7																				
5.8																				
5.9																				
5.10																				
5.11																				
6.1																				
6.2																				
6.3																				
6.4																				
6.5																				

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Index	Ø DC = 13,7–14,0 mm			Ø DC = 15,5–16,0 mm			Ø DC = 17,5–20,0 mm			Ramping	Helical milling			Drilling	● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	1,0 x DC		Hole diameter		1,0 x DC			
	f_z mm			f_z mm			f_z mm			Max. plunging angle	$\alpha_{R\,max.}$*	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	f_z Factor	Emulsion	Compressed air	MMS
1.1	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.2	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.3	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.4	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.5	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.6	0,142	0,110	0,078	0,159	0,123	0,087	0,173	0,134	0,095	45°	0,75xD	25°	16°	0,8	○	●	○
1.7	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.8	0,128	0,099	0,070	0,142	0,110	0,078	0,155	0,120	0,085	45°	0,75xD	25°	16°	0,7	●		○
1.9	0,126	0,098	0,069	0,141	0,109	0,077	0,153	0,119	0,084	45°	0,75xD	25°	16°	0,7	●		○
1.10	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○
1.11	0,128	0,099	0,070	0,142	0,110	0,078	0,155	0,120	0,085	45°	0,75xD	25°	16°	0,8	●		○
1.12	0,146	0,113	0,080	0,162	0,126	0,089	0,177	0,137	0,097	30°	0,5xD	18°	11°	0,8	○	●	○
1.13	0,133	0,103	0,073	0,148	0,115	0,081	0,161	0,124	0,088	30°	0,5xD	18°	11°	0,7	●		○
1.14	0,133	0,103	0,073	0,148	0,115	0,081	0,161	0,124	0,088	30°	0,5xD	18°	11°	0,7	●		○
1.15	0,133	0,103	0,073	0,148	0,115	0,081	0,161	0,124	0,088	30°	0,5xD	18°	11°	0,7	●		○
1.16	0,148	0,115	0,081	0,164	0,127	0,090	0,179	0,139	0,098	30°	0,5xD	18°	11°	0,7	○	●	○
2.1	0,089	0,069	0,049	0,099	0,076	0,054	0,108	0,083	0,059	15°	0,5xD	18°	11°		●		○
2.2	0,097	0,075	0,053	0,108	0,083	0,059	0,117	0,091	0,064	15°	0,5xD	18°	11°		●		○
2.3	0,097	0,075	0,053	0,108	0,083	0,059	0,117	0,091	0,064	15°	0,5xD	18°	11°		●		○
2.4	0,097	0,075	0,053	0,108	0,083	0,059	0,117	0,091	0,064	15°	0,5xD	18°	11°		●		○
2.5	0,075	0,058	0,041	0,082	0,064	0,045	0,089	0,069	0,049	15°	0,5xD	18°	11°		●		
2.6	0,089	0,069	0,049	0,099	0,076	0,054	0,108	0,083	0,059	15°	0,5xD	18°	11°		●		○
2.7	0,077	0,059	0,042	0,086	0,066	0,047	0,093	0,072	0,051	15°	0,5xD	18°	11°		●		
3.1	0,256	0,198	0,140	0,285	0,221	0,156	0,310	0,240	0,170	45°	0,75xD	25°	25°	0,8	○	●	○
3.2	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○
3.3	0,217	0,168	0,119	0,241	0,187	0,132	0,263	0,204	0,144	45°	0,75xD	25°	25°	0,8	○	●	○
3.4	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○
3.5	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○
3.6	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	25°	0,8	○	●	○
3.7	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○
3.8	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	25°	0,8	○	●	○
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6																	
4.7																	
4.8																	
4.9																	
4.10																	
4.11																	
4.12																	
4.13																	
4.14																	
4.15																	
4.16																	
4.17																	
4.18																	
4.19																	
5.1																	
5.2																	
5.3																	
5.4																	
5.5																	
5.6																	
5.7																	
5.8																	
5.9																	
5.10																	
5.11																	
6.1																	
6.2																	
6.3																	
6.4																	
6.5																	

14

* Width of cut per helical revolution

Cutting data for ramping and helical milling = 100 %
Multiply cutting data for drilling by the factor from the table

Cutting data standard values – MonsterMill – End mills – PCR-ALU

	long	extra long		Ø DC = 5,0 mm			Ø DC = 5,7–7,0 mm			Ø DC = 7,7–8,0 mm			Ø DC = 8,7–10,0 mm			Ø DC =11,7–12,0 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1																		
1.2																		
1.3																		
1.4																		
1.5																		
1.6																		
1.7																		
1.8																		
1.9																		
1.10																		
1.11																		
1.12																		
1.13																		
1.14																		
1.15																		
1.16																		
2.1																		
2.2																		
2.3																		
2.4																		
2.5																		
2.6																		
2.7																		
3.1																		
3.2																		
3.3																		
3.4																		
3.5																		
3.6																		
3.7																		
3.8																		
4.1	700	300	1	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,130	0,097	0,065	0,140	0,104	0,070
4.2	700	300	1	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,130	0,097	0,065	0,140	0,104	0,070
4.3	420	200	1	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.4	420	180	1	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.5	280	140	1	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.6	200	110	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.7	180	100	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.8	175	75	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.9	175	75	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.10	175	75	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.11	280	125	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.12	210	100	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.13																		
4.14																		
4.15																		
4.16	220	130	1	0,07	0,052	0,035	0,08	0,06	0,04	0,1	0,075	0,05	0,12	0,089	0,06	0,14	0,104	0,07
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9																		
5.10																		
5.11																		
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Index	Ø DC = 13,7–14,0 mm			Ø DC = 15,5–16,0 mm			Ø DC = 17,5–18,0 mm			Ø DC = 19,5–20,0 mm			Ramping	Helical milling			Drilling	● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	1,0 x DC		Hole diameter		1,0 x DC			
	f_z mm			f_z mm			f_z mm			f_z mm			Max. plunging angle	$\alpha_{R\,max.}$*	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	v_c Factor	Emulsion	Compressed air	MMS
1.1																				
1.2																				
1.3																				
1.4																				
1.5																				
1.6																				
1.7																				
1.8																				
1.9																				
1.10																				
1.11																				
1.12																				
1.13																				
1.14																				
1.15																				
1.16																				
2.1																				
2.2																				
2.3																				
2.4																				
2.5																				
2.6																				
2.7																				
3.1																				
3.2																				
3.3																				
3.4																				
3.5																				
3.6																				
3.7																				
3.8																				
4.1	0,146	0,113	0,080	0,152	0,116	0,090	0,166	0,136	0,105	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,75	●		○
4.2	0,146	0,113	0,080	0,152	0,116	0,090	0,166	0,136	0,105	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,75	●		○
4.3	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	45°	0,75xD	25°	16°	0,75	●		○
4.4	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	45°	0,75xD	25°	16°	0,75	●		○
4.5	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	45°	0,75xD	25°	16°	0,7	●		○
4.6	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.7	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.8	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.9	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.10	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.11	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.12	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●		○
4.13																				
4.14																				
4.15																				
4.16	0,164	0,127	0,09	0,203	0,155	0,12	0,221	0,181	0,14	0,269	0,219	0,17	45°	0,75xD	25°	16°	0,7	●		○
4.17																				
4.18																				
4.19																				
5.1																				
5.2																				
5.3																				
5.4																				
5.5																				
5.6																				
5.7																				
5.8																				
5.9																				
5.10																				
5.11																				
6.1																				
6.2																				
6.3																				
6.4																				
6.5																				

* Width of cut per helical revolution

Cutting data for ramping and helical milling = 100 %
Multiply cutting data for drilling by the factor from the table

Cutting data standard values – MonsterMill – End Mills – MCR, short – long

			Ø DC = 1 mm			Ø DC = 2 mm					Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm		
		short	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	short	long	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			$a_{p\,max.}$ x DC		f_z mm			f_z mm			f_z mm		
1.1	120–140	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030
1.2	120–140	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030
1.3	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.4	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.5	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.6	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.7	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.8	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.9	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.10	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.11	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.12	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.13	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.14	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.15	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
1.16	100–120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
2.1	60–80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023
2.2	60–80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023
2.3	60–80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023
2.4																			
2.5	60–80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023
2.6	60–80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023
2.7																			
3.1	120–140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035
3.2	120–140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035
3.3	120–140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035
3.4	120–140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035
3.5	100–120	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030
3.6	100–120	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030
3.7	100–120	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030
3.8	100–120	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030
4.1																			
4.2																			
4.3																			
4.4																			
4.5																			
4.6	120–140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
4.7	120–140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
4.8																			
4.9																			
4.10																			
4.11	120–140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
4.12	120–140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
4.13																			
4.14																			
4.15																			
4.16																			
4.17																			
4.18																			
4.19																			
5.1																			
5.2																			
5.3																			
5.4																			
5.5																			
5.6																			
5.7																			
5.8																			
5.9	60–80	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020
5.10	60–80	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020
5.11	60–80	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020
6.1	80–100	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025
6.2																			
6.3																			
6.4																			
6.5																			

* = with an a_p of 1.5 x DC the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: Diameter 3–5 = 3° / Diameter 6–9 = 5° / Diameter 10–20 = 8°

Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice		○ suitable
a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
0,077	0,057	0,036	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
0,077	0,057	0,036	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
0,058	0,043	0,027	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
0,058	0,043	0,027	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
0,058	0,043	0,027	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
0,058	0,043	0,027	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
0,058	0,043	0,027	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
0,090	0,066	0,042	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
0,090	0,066	0,042	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
0,090	0,066	0,042	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
0,090	0,066	0,042	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
0,077	0,057	0,036	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
0,077	0,057	0,036	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
0,077	0,057	0,036	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
0,077	0,057	0,036	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
0,051	0,038	0,024	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
0,051	0,038	0,024	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
0,051	0,038	0,024	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
0,064	0,047	0,030	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	

14

Cutting data standard values – MonsterMill – End Mills – MCR, extra long

		extra long		Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max}$ x DC		f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	120–140	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
1.2	120–140	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
1.3	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.4	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.5	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.6	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.7	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.8	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.9	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.10	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.11	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.12	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.13	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.14	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.15	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
1.16	100–120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
2.1	50–70	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
2.2	50–70	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
2.3	50–70	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
2.4																		
2.5	50–70	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
2.6	50–70	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
2.7																		
3.1	120–140	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
3.2	120–140	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
3.3	120–140	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
3.4	120–140	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
3.5	100–120	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
3.6	100–120	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
3.7	100–120	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
3.8	100–120	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6	120–140	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
4.7	120–140	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
4.8																		
4.9																		
4.10																		
4.11	120–140	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
4.12	120–140	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
4.13																		
4.14																		
4.15																		
4.16																		
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9	60–80	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
5.10	60–80	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
5.11	60–80	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
6.1	80–100	0,5*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
6.2																		
6.3																		
6.4																		
6.5																		

* = Trimming and trochoidal slot milling

Plunging angle for ramping and helical milling: Diameter 3–5 = 3° / Diameter 6–9 = 5° / Diameter 10–20 = 8°

		Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice	○ suitable	
		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	Index	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
	1.1	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
	1.2	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
	1.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.4	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.5	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.6	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.7	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.8	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.9	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.10	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.11	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.12	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.13	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.14	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.15	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	1.16	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	2.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	2.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	2.3	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	2.4																		
	2.5	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	2.6	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	2.7																		
	3.1	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
	3.2	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
	3.3	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
	3.4	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
	3.5	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
	3.6	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
	3.7	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
	3.8	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
	4.1																		
	4.2																		
	4.3																		
	4.4																		
	4.5																		
	4.6	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	4.7	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	4.8																		
	4.9																		
	4.10																		
	4.11	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	4.12	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	4.13																		
	4.14																		
	4.15																		
	4.16																		
	4.17																		
	4.18																		
	4.19																		
	5.1																		
	5.2																		
	5.3																		
	5.4																		
	5.5																		
	5.6																		
	5.7																		
	5.8																		
	5.9	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	5.10	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	5.11	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
	6.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
	6.2																		
	6.3																		
	6.4																		
	6.5																		

14

Cutting data – CircularLine – End Mills – CCR-UNI, short – long

Index	short, long	max. angle of engagement	Ø DC = 6 mm				Ø DC = 8 mm				Ø DC = 10 mm			
			a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC		a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC		a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	
	v_c m/min		f_z mm			h_m	f_z mm			h_m	f_z mm			h_m
1.1	**300**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
1.2	**300**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
1.3	**280**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
1.4	**280**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
1.5	**280**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.6	**260**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.7	**280**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.8	**260**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.9	**260**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.10	**240**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.11	**240**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.12	**240**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.13	**240**	50°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.14														
1.15	**220**	45°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
1.16	**220**	45°	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,040
2.1	200	45°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028
2.2	180	45°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028
2.3	160	45°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028
2.4	160	45°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028
2.5	140	45°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028
2.6	140	45°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028
2.7														
3.1	**300**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
3.2	**300**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
3.3	**300**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
3.4	**260**	50°	0,13	0,09	0,08	0,03	0,16	0,11	0,09	0,035	0,20	0,14	0,12	0,045
3.5	**260**	50°	0,11	0,08	0,06	0,025	0,16	0,11	0,09	0,035	0,18	0,13	0,10	0,040
3.6	**240**	50°	0,11	0,08	0,06	0,025	0,16	0,11	0,09	0,035	0,18	0,13	0,10	0,040
3.7	**240**	50°	0,11	0,08	0,06	0,025	0,16	0,11	0,09	0,035	0,18	0,13	0,10	0,040
3.8	**200**	50°	0,11	0,08	0,06	0,025	0,16	0,11	0,09	0,035	0,18	0,13	0,10	0,040
4.1														
4.2														
4.3														
4.4														
4.5														
4.6														
4.7														
4.8														
4.9														
4.10														
4.11														
4.12														
4.13														
4.14														
4.15														
4.16														
4.17														
4.18														
4.19														
5.1	120	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.2	80	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.3	80	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.4	60	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.5	60	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.6	60	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.7	60	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.8	60	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
5.9	140	40°	0,06	0,04	0,03	0,01	0,07	0,05	0,04	0,016	0,09	0,06	0,05	0,020
5.10	120	40°	0,06	0,04	0,03	0,01	0,07	0,05	0,04	0,016	0,09	0,06	0,05	0,020
5.11	100	40°	0,04	0,03	0,03	0,01	0,05	0,04	0,03	0,012	0,07	0,05	0,04	0,015
6.1														
6.2														
6.3														
6.4														
6.5														

Depth of cut corresponds to the flute length

	Ø DC = 12 mm				Ø DC = 16 mm				Ø DC = 20 mm				● 1st choice		○ suitable
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC		a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC		a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC				
Index	f_z mm			h_m	f_z mm			h_m	f_z mm			h_m	Emulsion	Compressed air	MMS
1.1	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
1.2	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
1.3	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
1.4	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
1.5	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.6	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.7	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.8	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.9	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.10	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.11	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.12	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.13	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.14															
1.15	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
1.16	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
2.1	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,042	0,27	0,19	0,15	0,06	●		
2.2	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,042	0,27	0,19	0,15	0,06	●		
2.3	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,042	0,27	0,19	0,15	0,06	●		
2.4	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,042	0,27	0,19	0,15	0,06	●		
2.5	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,042	0,27	0,19	0,15	0,06	●		
2.6	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,042	0,27	0,19	0,15	0,06	●		
2.7															
3.1	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
3.2	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
3.3	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
3.4	0,25	0,18	0,15	0,057	0,29	0,21	0,17	0,065	0,34	0,24	0,19	0,075	○	●	○
3.5	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
3.6	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
3.7	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
3.8	0,23	0,16	0,13	0,051	0,27	0,19	0,15	0,06	0,29	0,21	0,17	0,065	○	●	○
4.1															
4.2															
4.3															
4.4															
4.5															
4.6															
4.7															
4.8															
4.9															
4.10															
4.11															
4.12															
4.13															
4.14															
4.15															
4.16															
4.17															
4.18															
4.19															
5.1	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.2	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.3	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.4	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.5	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.6	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.7	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.8	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
5.9	0,11	0,08	0,07	0,025	0,16	0,11	0,09	0,035	0,22	0,15	0,13	0,049	●		
5.10	0,11	0,08	0,07	0,025	0,16	0,11	0,09	0,035	0,22	0,15	0,13	0,049	●		
5.11	0,08	0,06	0,05	0,019	0,12	0,08	0,07	0,026	0,16	0,12	0,09	0,036	●		
6.1															
6.2															
6.3															
6.4															
6.5															

Cutting data – CircularLine – End Mills – CCR-UNI, extra long

	extra long	max. angle of engagement	Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm		
			a_e 0,05 x DC	a_e 0,1 x DC		a_e 0,05 x DC	a_e 0,1 x DC		a_e 0,05 x DC	a_e 0,1 x DC		a_e 0,05 x DC	a_e 0,1 x DC		a_e 0,05 x DC	a_e 0,1 x DC	
Index	v_c in m/min		f_z mm		h_m	f_z mm		h_m	f_z mm		h_m	f_z mm		h_m	f_z mm		h_m
1.1	260	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
1.2	260	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
1.3	250	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
1.4	250	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
1.5	250	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.6	230	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.7	250	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.8	230	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.9	230	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.10	210	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.11	210	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.12	210	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.13	210	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.14																	
1.15	200	45°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
1.16	200	45°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
2.1	170	45°	0,04	0,03	0,009	0,05	0,03	0,011	0,06	0,04	0,014	0,08	0,06	0,018	0,09	0,07	0,021
2.2	150	45°	0,04	0,03	0,009	0,05	0,03	0,011	0,06	0,04	0,014	0,08	0,06	0,018	0,09	0,07	0,021
2.3	130	45°	0,04	0,03	0,009	0,05	0,03	0,011	0,06	0,04	0,014	0,08	0,06	0,018	0,09	0,07	0,021
2.4	130	45°	0,04	0,03	0,009	0,05	0,03	0,011	0,06	0,04	0,014	0,08	0,06	0,018	0,09	0,07	0,021
2.5	110	45°	0,04	0,03	0,009	0,05	0,03	0,011	0,06	0,04	0,014	0,08	0,06	0,018	0,09	0,07	0,021
2.6	110	45°	0,04	0,03	0,009	0,05	0,03	0,011	0,06	0,04	0,014	0,08	0,06	0,018	0,09	0,07	0,021
2.7																	
3.1	260	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
3.2	260	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
3.3	260	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
3.4	230	50°	0,07	0,05	0,015	0,08	0,06	0,018	0,10	0,07	0,022	0,12	0,09	0,027	0,14	0,10	0,032
3.5	230	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
3.6	210	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
3.7	210	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,09	0,030
3.8	180	50°	0,05	0,04	0,012	0,07	0,05	0,016	0,09	0,06	0,020	0,11	0,08	0,025	0,13	0,10	0,030
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6																	
4.7																	
4.8																	
4.9																	
4.10																	
4.11																	
4.12																	
4.13																	
4.14																	
4.15																	
4.16																	
4.17																	
4.18																	
4.19																	
5.1	100	40°	0,02	0,02	0,005	0,03	0,02	0,006	0,04	0,03	0,008	0,04	0,03	0,010	0,06	0,04	0,013
5.2	70	40°	0,02	0,02	0,005	0,03	0,02	0,006	0,04	0,03	0,008	0,04	0,03	0,010	0,06	0,04	0,013
5.3	70	40°	0,02	0,02	0,005	0,03	0,02	0,006	0,04	0,03	0,008	0,04	0,03	0,010	0,06	0,04	0,013
5.4																	
5.5																	
5.6																	
5.7																	
5.8																	
5.9	120	40°	0,03	0,02	0,007	0,04	0,03	0,008	0,04	0,03	0,010	0,05	0,04	0,012	0,08	0,05	0,017
5.10	100	40°	0,03	0,02	0,007	0,04	0,03	0,008	0,04	0,03	0,010	0,05	0,04	0,012	0,08	0,05	0,017
5.11	90	40°	0,02	0,02	0,005	0,03	0,02	0,006	0,04	0,03	0,008	0,04	0,03	0,010	0,06	0,04	0,013
6.1																	
6.2																	
6.3																	
6.4																	
6.5																	

Depth of cut corresponds to the flute length

	Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,05 x DC	a_e 0,1 x DC				
Index	f_z mm		h_m	Emulsion	Compressed air	MMS
1.1	0,17	0,12	0,037	○	●	○
1.2	0,17	0,12	0,037	○	●	○
1.3	0,17	0,12	0,037	○	●	○
1.4	0,17	0,12	0,037	○	●	○
1.5	0,14	0,10	0,032	○	●	○
1.6	0,14	0,10	0,032	○	●	○
1.7	0,14	0,10	0,032	○	●	○
1.8	0,14	0,10	0,032	○	●	○
1.9	0,14	0,10	0,032	○	●	○
1.10	0,14	0,10	0,032	○	●	○
1.11	0,14	0,10	0,032	○	●	○
1.12	0,14	0,10	0,032	○	●	○
1.13	0,14	0,10	0,032	○	●	○
1.14						
1.15	0,14	0,10	0,032	○	●	○
1.16	0,14	0,10	0,032	○	●	○
2.1	0,13	0,09	0,03	●		
2.2	0,13	0,09	0,03	●		
2.3	0,13	0,09	0,03	●		
2.4	0,13	0,09	0,03	●		
2.5	0,13	0,09	0,03	●		
2.6	0,13	0,09	0,03	●		
2.7						
3.1	0,17	0,12	0,037	○	●	○
3.2	0,17	0,12	0,037	○	●	○
3.3	0,17	0,12	0,037	○	●	○
3.4	0,17	0,12	0,037	○	●	○
3.5	0,14	0,10	0,032	○	●	○
3.6	0,14	0,10	0,032	○	●	○
3.7	0,14	0,10	0,032	○	●	○
3.8	0,14	0,10	0,032	○	●	○
4.1						
4.2						
4.3						
4.4						
4.5						
4.6						
4.7						
4.8						
4.9						
4.10						
4.11						
4.12						
4.13						
4.14						
4.15						
4.16						
4.17						
4.18						
4.19						
5.1	0,08	0,06	0,018	●		
5.2	0,08	0,06	0,018	●		
5.3	0,08	0,06	0,018	●		
5.4						
5.5						
5.6						
5.7						
5.8						
5.9	0,11	0,08	0,024	●		
5.10	0,11	0,08	0,024	●		
5.11	0,08	0,06	0,018	●		
6.1						
6.2						
6.3						
6.4						
6.5						

Cutting data – CircularLine – End Mills – CCR-AL, long – extra long

Index	long v_c m/min	extra long v_c m/min	max. angle of engagement	Ø DC = 6 mm a_e 0,1 x DC f_z mm	Ø DC = 6 mm a_e 0,2 x DC f_z mm	Ø DC = 6 mm a_e 0,4 x DC f_z mm	Ø DC = 6 mm h_m	Ø DC = 8 mm a_e 0,1 x DC f_z mm	Ø DC = 8 mm a_e 0,2 x DC f_z mm	Ø DC = 8 mm a_e 0,4 x DC f_z mm	Ø DC = 8 mm h_m	● 1st choice Emulsion		○ suitable MMS
													Compressed air	
4.1	**500**	**400**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.2	**500**	**400**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.3	**500**	**400**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.4	**500**	**400**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.5	**400**	**350**	60°	0,35	0,25	0,17	0,110	0,44	0,31	0,22	0,140	●		○
4.6	**300**	**250**	60°	0,35	0,25	0,17	0,110	0,38	0,27	0,19	0,120	●		○
4.7	**300**	**250**	60°	0,35	0,25	0,17	0,110	0,38	0,27	0,19	0,120	●		○
4.8	**300**	**250**	60°	0,35	0,25	0,17	0,110	0,38	0,27	0,19	0,120	●		○
4.9	**300**	**250**	60°	0,35	0,25	0,17	0,110	0,38	0,27	0,19	0,120	●		○
4.10	**300**	**250**	60°	0,35	0,25	0,17	0,110	0,38	0,27	0,19	0,120	●		○
4.11	**400**	**350**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.12	**400**	**350**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○

Index	long v_c m/min	extra long v_c m/min	max. angle of engagement	Ø DC = 10 mm a_e 0,1 x DC f_z mm	Ø DC = 10 mm a_e 0,2 x DC f_z mm	Ø DC = 10 mm a_e 0,4 x DC f_z mm	Ø DC = 10 mm h_m	Ø DC = 12 mm a_e 0,1 x DC f_z mm	Ø DC = 12 mm a_e 0,2 x DC f_z mm	Ø DC = 12 mm a_e 0,4 x DC f_z mm	Ø DC = 12 mm h_m	● 1st choice Emulsion		○ suitable MMS
													Compressed air	
4.1	**500**	**400**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○
4.2	**500**	**400**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○
4.3	**500**	**400**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○
4.4	**500**	**400**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○
4.5	**400**	**350**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○
4.6	**300**	**250**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.7	**300**	**250**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.8	**300**	**250**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.9	**300**	**250**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.10	**300**	**250**	60°	0,41	0,29	0,21	0,130	0,44	0,31	0,22	0,140	●		○
4.11	**400**	**350**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○
4.12	**400**	**350**	60°	0,47	0,34	0,24	0,150	0,51	0,36	0,25	0,160	●		○

Index	long v_c m/min	extra long v_c m/min	max. angle of engagement	Ø DC = 16 mm a_e 0,1 x DC f_z mm	Ø DC = 16 mm a_e 0,2 x DC f_z mm	Ø DC = 16 mm a_e 0,4 x DC f_z mm	Ø DC = 16 mm h_m	Ø DC = 20 mm a_e 0,1 x DC f_z mm	Ø DC = 20 mm a_e 0,2 x DC f_z mm	Ø DC = 20 mm a_e 0,4 x DC f_z mm	Ø DC = 20 mm h_m	● 1st choice Emulsion		○ suitable MMS
													Compressed air	
4.1	**500**	**400**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○
4.2	**500**	**400**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○
4.3	**500**	**400**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○
4.4	**500**	**400**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○
4.5	**400**	**350**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○
4.6	**300**	**250**	60°	0,57	0,40	0,29	0,18	0,63	0,45	0,32	0,2	●		○
4.7	**300**	**250**	60°	0,57	0,40	0,29	0,18	0,63	0,45	0,32	0,2	●		○
4.8	**300**	**250**	60°	0,57	0,40	0,29	0,18	0,63	0,45	0,32	0,2	●		○
4.9	**300**	**250**	60°	0,57	0,40	0,29	0,18	0,63	0,45	0,32	0,2	●		○
4.10	**300**	**250**	60°	0,57	0,40	0,29	0,18	0,63	0,45	0,32	0,2	●		○
4.11	**400**	**350**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○
4.12	**400**	**350**	60°	0,63	0,45	0,32	0,2	0,76	0,54	0,38	0,24	●		○

Depth of cut corresponds to the flute length

Plunging angle for ramping and helical milling: 4°

Cutting data standard values – CircularLine – End mills – CCR-H, 53 596 ...

Index	long v_c m/min	max. angle of engagement	Ø DC = 6 mm a_e 0,02 x DC f_z mm	Ø DC = 6 mm a_e 0,05 x DC f_z mm	Ø DC = 6 mm a_e 0,10 x DC f_z mm	Ø DC = 6 mm h_m	Ø DC = 8 mm a_e 0,02 x DC f_z mm	Ø DC = 8 mm a_e 0,05 x DC f_z mm	Ø DC = 8 mm a_e 0,10 x DC f_z mm	Ø DC = 8 mm h_m	Ø DC = 10 mm a_e 0,02 x DC f_z mm	Ø DC = 10 mm a_e 0,05 x DC f_z mm	Ø DC = 10 mm a_e 0,10 x DC f_z mm	Ø DC = 10 mm h_m	● 1st choice Emulsion	● 1st choice Compressed air	○ suitable MMS
6.1	150	30°	**0,13**	**0,08**	**0,06**	**0,018**	**0,14**	**0,09**	**0,06**	**0,020**	**0,18**	**0,11**	**0,08**	**0,025**		●	○
6.2	130	30°	**0,09**	**0,06**	**0,04**	**0,013**	**0,11**	**0,07**	**0,05**	**0,016**	**0,14**	**0,09**	**0,06**	**0,020**		●	○
6.3	120	30°	**0,04**	**0,03**	**0,02**	**0,006**	**0,06**	**0,04**	**0,03**	**0,008**	**0,07**	**0,04**	**0,03**	**0,010**		●	○
6.4	115	30°	**0,03**	**0,02**		**0,004**	**0,04**	**0,03**		**0,006**	**0,05**	**0,03**		**0,007**		●	○
6.5	110	30°	**0,02**			**0,003**	**0,03**			**0,004**	**0,04**			**0,005**		●	○

Index	long v_c m/min	max. angle of engagement	Ø DC = 12 mm a_e 0,02 x DC f_z mm	Ø DC = 12 mm a_e 0,05 x DC f_z mm	Ø DC = 12 mm a_e 0,10 x DC f_z mm	Ø DC = 12 mm h_m	Ø DC = 16 mm a_e 0,02 x DC f_z mm	Ø DC = 16 mm a_e 0,05 x DC f_z mm	Ø DC = 16 mm a_e 0,10 x DC f_z mm	Ø DC = 16 mm h_m	Ø DC = 20 mm a_e 0,02 x DC f_z mm	Ø DC = 20 mm a_e 0,05 x DC f_z mm	Ø DC = 20 mm a_e 0,10 x DC f_z mm	Ø DC = 20 mm h_m	● 1st choice Emulsion	● 1st choice Compressed air	○ suitable MMS
6.1	150	30°	**0,21**	**0,13**	**0,09**	**0,030**	**0,28**	**0,18**	**0,13**	**0,040**	**0,35**	**0,22**	**0,16**	**0,050**		●	○
6.2	130	30°	**0,18**	**0,11**	**0,08**	**0,025**	**0,25**	**0,16**		**0,035**	**0,34**	**0,22**		**0,049**		●	○
6.3	120	30°	**0,08**	**0,05**	**0,04**	**0,012**	**0,13**	**0,08**		**0,018**	**0,17**	**0,11**		**0,024**		●	○
6.4	115	30°	**0,06**	**0,04**		**0,009**	**0,09**			**0,013**	**0,13**			**0,018**		●	○
6.5	110	30°	**0,04**			**0,006**	**0,06**			**0,009**	**0,08**			**0,012**		●	○

Depth of cut corresponds to the flute length

Cutting data standard values – CircularLine – CCR-Ti, long

Index	long v_c m/min	max. angle of engagement	Ø DC = 6 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	a_e 0,15 x DC f_z mm	h_m	Ø DC = 8 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	a_e 0,15 x DC f_z mm	h_m	Ø DC = 10 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	a_e 0,15 x DC f_z mm	h_m
2.1	200	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028
2.2	180	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028
2.3	160	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028
2.4	160	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028
2.5	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028
2.6	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028
2.7														
5.1	**120**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.2	**80**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.3	**80**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.4	**60**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.5	**60**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.6	**60**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.7	**60**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.8	**60**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015
5.9	**140**	40°	0,060	0,042	0,034	0,013	0,070	0,049	0,040	0,016	0,089	0,063	0,052	0,020
5.10	**120**	40°	0,060	0,042	0,034	0,013	0,070	0,049	0,040	0,016	0,089	0,063	0,052	0,020
5.11	**100**	40°	0,045	0,032	0,026	0,010	0,052	0,037	0,030	0,012	0,067	0,047	0,039	0,015

Cutting data standard values – CircularLine – CCR-Ti, extra long

Index	extra long v_c m/min	max. angle of engagement	Ø DC = 6 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	h_m	Ø DC = 8 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	h_m	Ø DC = 10 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	h_m	Ø DC = 12 mm a_e 0,05 x DC f_z mm	a_e 0,10 x DC f_z mm	h_m
2.1	170	45°	0,080	0,057	0,018	0,098	0,070	0,022	0,125	0,089	0,028	0,125	0,089	0,028
2.2	150	45°	0,080	0,057	0,018	0,098	0,070	0,022	0,125	0,089	0,028	0,125	0,089	0,028
2.3	130	45°	0,080	0,057	0,018	0,098	0,070	0,022	0,125	0,089	0,028	0,125	0,089	0,028
2.4	130	45°	0,080	0,057	0,018	0,098	0,070	0,022	0,125	0,089	0,028	0,125	0,089	0,028
2.5	110	45°	0,080	0,057	0,018	0,098	0,070	0,022	0,125	0,089	0,028	0,125	0,089	0,028
2.6	110	45°	0,080	0,057	0,018	0,098	0,070	0,022	0,125	0,089	0,028	0,125	0,089	0,028
2.7														
5.1	**100**	40°	0,022	0,016	0,005	0,027	0,019	0,006	0,036	0,025	0,008	0,045	0,032	0,010
5.2	**70**	40°	0,022	0,016	0,005	0,027	0,019	0,006	0,036	0,025	0,008	0,045	0,032	0,010
5.3	**70**	40°	0,022	0,016	0,005	0,027	0,019	0,006	0,036	0,025	0,008	0,045	0,032	0,010
5.4														
5.5														
5.6														
5.7														
5.8														
5.9	**120**	40°	0,031	0,022	0,007	0,036	0,025	0,008	0,045	0,032	0,010	0,054	0,038	0,012
5.10	**100**	40°	0,031	0,022	0,007	0,036	0,025	0,008	0,045	0,032	0,010	0,054	0,038	0,012
5.11	**90**	40°	0,022	0,016	0,005	0,027	0,019	0,006	0,036	0,025	0,008	0,045	0,032	0,010

Depth of cut corresponds to the flute length

	Ø DC = 12 mm				Ø DC = 16 mm				Ø DC = 20 mm				● 1st choice		○ suitable
	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m			
Index	f_z mm	f_z mm	f_z mm		f_z mm	f_z mm	f_z mm		f_z mm	f_z mm	f_z mm		Emulsion	Compressed air	MMS
2.1	0,161	0,114	0,093	0,036	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,06	●		
2.2	0,161	0,114	0,093	0,036	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,06	●		
2.3	0,161	0,114	0,093	0,036	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,06	●		
2.4	0,161	0,114	0,093	0,036	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,06	●		
2.5	0,161	0,114	0,093	0,036	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,06	●		
2.6	0,161	0,114	0,093	0,036	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,06	●		
2.7															
5.1	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.2	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.3	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.4	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.5	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.6	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.7	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.8	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		
5.9	0,113	0,080	0,065	0,025	0,157	0,111	0,090	0,035	0,217	0,153	0,125	0,049	●		
5.10	0,113	0,080	0,065	0,025	0,157	0,111	0,090	0,035	0,217	0,153	0,125	0,049	●		
5.11	0,085	0,060	0,049	0,019	0,117	0,083	0,068	0,026	0,163	0,115	0,094	0,036	●		

	Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m			
Index	f_z mm	f_z mm		f_z mm	f_z mm		Emulsion	Compressed air	MMS
2.1	0,161	0,114	0,036	0,188	0,133	0,042	●		
2.2	0,161	0,114	0,036	0,188	0,133	0,042	●		
2.3	0,161	0,114	0,036	0,188	0,133	0,042	●		
2.4	0,161	0,114	0,036	0,188	0,133	0,042	●		
2.5	0,161	0,114	0,036	0,188	0,133	0,042	●		
2.6	0,161	0,114	0,036	0,188	0,133	0,042	●		
2.7									
5.1	0,058	0,041	0,013	0,080	0,057	0,018	●		
5.2	0,058	0,041	0,013	0,080	0,057	0,018	●		
5.3	0,058	0,041	0,013	0,080	0,057	0,018	●		
5.4									
5.5									
5.6									
5.7									
5.8									
5.9	0,076	0,054	0,017	0,107	0,076	0,024	●		
5.10	0,076	0,054	0,017	0,107	0,076	0,024	●		
5.11	0,058	0,041	0,013	0,080	0,057	0,018	●		

14

Cutting data standard values – AluLine – End mills – ZEFP = 2

	Type short / medium length	Type long / extra long		Ø DC = 2 mm			Ø DC = 2,5 mm			Ø DC = 3,0–3,5 mm			Ø DC = 4,0–4,5 mm			Ø DC = 5,0–5,5 mm			Ø DC = 6,0–7,5 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	700	300	1,0	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,072	0,055	0,040	0,090	0,067	0,045	0,100	0,075	0,050
4.2	700	300	1,0	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,072	0,055	0,040	0,090	0,067	0,045	0,100	0,075	0,050
4.3	420	200	1,0	0,027	0,021	0,015	0,034	0,026	0,019	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040
4.4	420	180	1,0	0,027	0,021	0,015	0,034	0,026	0,019	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040
4.5	280	140	1,0	0,027	0,021	0,015	0,034	0,026	0,019	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040
4.6	200	110	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.7	180	100	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.8	175	75	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.9	175	75	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.10	175	75	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.11	280	125	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.12	210	100	1,0	0,018	0,014	0,010	0,022	0,017	0,013	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030
4.13																					
4.14																					
4.15																					
4.16	220	130	1,0	0,027	0,021	0,015	0,034	0,026	0,019	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040
4.17																					
4.18																					
4.19																					

Cutting data standard values – AluLine – End mills – ZEFP = 3–4

	Type short / medium length	Type long / extra long		Ø DC = 3,0–3,5 mm			Ø DC = 4,0–4,5 mm			Ø DC = 5,0–5,5 mm			Ø DC = 6,0–7,5 mm			Ø DC = 8,0–8,5 mm			Ø DC = 10 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	700	300	1,0	0,048	0,037	0,027	0,063	0,048	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,130	0,097	0,065
4.2	700	300	1,0	0,048	0,037	0,027	0,063	0,048	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,130	0,097	0,065
4.3	420	200	1,0	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.4	420	180	1,0	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.5	280	140	1,0	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.6	200	110	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.7	180	100	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.8	175	75	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.9	175	75	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.10	175	75	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.11	280	125	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.12	210	100	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.13																					
4.14																					
4.15																					
4.16	220	130	1,0	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.17																					
4.18																					
4.19																					

Index	Ø DC = 8,0–9,5 mm			Ø DC = 10,0–11,5 mm			Ø DC = 12,0–13,5 mm			Ø DC = 14,0–15,5 mm			Ø DC = 16,0–17,5 mm			Ø DC = 18,0–19,5 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
4.1	0,120	0,089	0,060	0,140	0,104	0,070	0,160	0,119	0,080	0,201	0,156	0,110	0,254	0,194	0,150	0,269	0,219	0,170	0,316	0,258	0,200	●	○*	○
4.2	0,120	0,089	0,060	0,140	0,104	0,070	0,160	0,119	0,080	0,201	0,156	0,110	0,254	0,194	0,150	0,269	0,219	0,170	0,316	0,258	0,200	●	○*	○
4.3	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	●	○*	○
4.4	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	●	○*	○
4.5	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	●	○*	○
4.6	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.7	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.8	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.9	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.10	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.11	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.12	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	●	○*	○
4.13																								
4.14																								
4.15																								
4.16	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	●	○*	○
4.17																								
4.18																								
4.19																								

* = only suitable for DLC coated cutters

Index	Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			Ø DC = 25 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
4.1	0,140	0,104	0,070	0,146	0,113	0,080	0,152	0,116	0,090	0,166	0,136	0,105	0,190	0,155	0,120	0,213	0,174	0,135	●	○*	○
4.2	0,140	0,104	0,070	0,146	0,113	0,080	0,152	0,116	0,090	0,166	0,136	0,105	0,190	0,155	0,120	0,213	0,174	0,135	●	○*	○
4.3	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	0,316	0,258	0,200	●	○*	○
4.4	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	0,316	0,258	0,200	●	○*	○
4.5	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	0,316	0,258	0,200	●	○*	○
4.6	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.7	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.8	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.9	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.10	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.11	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.12	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	0,221	0,181	0,140	●	○*	○
4.13																					
4.14																					
4.15																					
4.16	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	0,316	0,258	0,200	●	○*	○
4.17																					
4.18																					
4.19																					

* = only suitable for DLC coated cutters

Cutting data – AluLine – Ball Nosed End Mills

	Type short / medium length	Type long / extra long		Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	750	450	0,03	0,054	0,042	0,030	0,072	0,055	0,040	0,090	0,067	0,045	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.2	750	450	0,03	0,054	0,042	0,030	0,072	0,055	0,040	0,090	0,067	0,045	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.3	600	360	0,03	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.4	400	240	0,03	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.5	400	240	0,03	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.6	230	170	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.7	190	145	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.8	80	55	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.9	80	55	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.10	80	55	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.11	145	85	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.12	135	105	0,03	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
4.13	240	145	0,03				0,135	0,104	0,075	0,200	0,149	0,100	0,240	0,179	0,120	0,300	0,224	0,150	0,400	0,298	0,200
4.14	65	40	0,03				0,135	0,104	0,075	0,200	0,149	0,100	0,240	0,179	0,120	0,300	0,224	0,150	0,400	0,298	0,200
4.15																					
4.16	350	210	0,03	0,041	0,032	0,023	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.17																					
4.18																					
4.19																					

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

Cutting data – AluLine – High Accuracy Finishing Cutters

	Type short / medium length	Type long / extra long		Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	500	360	2,0	0,030	0,018		0,040	0,024		0,045	0,027		0,050	0,030		0,060	0,036	
4.2	500	360	2,0	0,030	0,018		0,040	0,024		0,045	0,027		0,050	0,030		0,060	0,036	
4.3	300	220	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.4	210	150	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.5	210	150	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.6	150	110	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.7	140	100	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.8	60	40	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.9	60	40	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.10	60	40	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.11	140	100	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.12	150	110	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.13																		
4.14																		
4.15																		
4.16	200	140	2,0	0,018	0,011		0,020	0,012		0,025	0,015		0,030	0,018		0,050	0,030	
4.17																		
4.18																		
4.19																		

	Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
Index	f_z mm			f_z mm			f_z mm			f_z mm					
4.1	0,160	0,119	0,080	0,201	0,156	0,110	0,254	0,194	0,150	0,316	0,258	0,200	●		○
4.2	0,160	0,119	0,080	0,201	0,156	0,110	0,254	0,194	0,150	0,316	0,258	0,200	●		○
4.3	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,269	0,219	0,170	●		○
4.4	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,269	0,219	0,170	●		○
4.5	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,269	0,219	0,170	●		○
4.6	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.7	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.8	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.9	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.10	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.11	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.12	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,190	0,155	0,120	●		○
4.13	0,500	0,373	0,250	0,548	0,424	0,300	0,592	0,452	0,350	0,712	0,581	0,450	●		○
4.14	0,500	0,373	0,250	0,548	0,424	0,300	0,592	0,452	0,350	0,712	0,581	0,450	●		○
4.15															
4.16	0,140	0,104	0,070	0,164	0,127	0,090	0,203	0,155	0,120	0,269	0,219	0,170	●		○
4.17															
4.18															
4.19															

	Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
Index	f_z mm					
4.1	0,070	0,042		●		○
4.2	0,070	0,042		●		○
4.3	0,060	0,036		●		○
4.4	0,060	0,036		●		○
4.5	0,060	0,036		●		○
4.6	0,060	0,036		●		○
4.7	0,060	0,036		●		○
4.8	0,060	0,036		●		○
4.9	0,060	0,036		●		○
4.10	0,060	0,036		●		○
4.11	0,060	0,036		●		○
4.12	0,060	0,036		●		○
4.13						
4.14						
4.15						
4.16	0,060	0,036		●		○
4.17						
4.18						
4.19						

Cutting data – SilverLine – End Mills – 50 951 ... / 50 952 ... / 50 953 ...

	Type short	Type long / extra long	Type short / long	Type extra long	Ø DC = 3,0–3,5 mm			Ø DC = 4,0–4,5 mm			Ø DC = 5,0–5,5 mm			Ø DC = 6,0–7,5 mm			Ø DC = 8,0–9,5 mm		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min		$a_{p\,max}$ x DC	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	**230**	**184**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.2	**240**	**192**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.3	**210**	**168**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.4	**200**	**160**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.5	**200**	**160**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.6	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.7	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.8	**180**	**144**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.9	**160**	**128**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.10	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.11	**170**	**136**	1,0*	0,5	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
1.12	**180**	**144**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.13																			
1.14																			
1.15																			
1.16																			
2.1	**130**	**104**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.2	**120**	**96**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.3	**100**	**80**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.4	**120**	**96**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.5	**120**	**96**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.6	**120**	**96**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.7	**30**	**24**	1,0*	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
3.1	200	160	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
3.2	180	144	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
3.3	190	152	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.4	170	136	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.5	180	144	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.6	160	128	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.7	180	144	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.8	160	128	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
4.1																			
4.2																			
4.3																			
4.4																			
4.5																			
4.6	280	224	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.7	300	240	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.8	160	128	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.9	140	112	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.10	120	96	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.11	350	280	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.12	300	240	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.13																			
4.14																			
4.15																			
4.16																			
4.17																			
4.18																			
4.19																			
5.1																			
5.2																			
5.3	**30**	**24**	0,5	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.4	**30**	**24**	0,5	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.5	**30**	**24**	0,5	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.6	**30**	**24**	0,5	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.7	**30**	**24**	0,5	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.8	**30**	**24**	0,5	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.9	**160**	**128**	0,5	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
5.10	**140**	**112**	0,5	0,5	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
5.11	**100**	**80**	0,5	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
6.1																			
6.2																			
6.3																			
6.4																			
6.5																			

* = long version: $a_{p\,max.}$ 1.5 x DC at f_z x 0.75 / ball-nosed end mill: $a_{p\,max.}$ 0.5 x DC

„Extra long“ version: when profiling with an a_e of 0.1–0.4 x DC an a_p of 1.0 x DC should be used.

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.2	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.3	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.4	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.5	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.6	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.7	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.8	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.9	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.10	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.11	0,08	0,06	0,04	0,10	0,08	0,05	0,10	0,08	0,06	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●	○	○
1.12	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.13																					
1.14																					
1.15																					
1.16																					
2.1	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.2	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.3	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.4	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.5	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.6	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.7	0,05	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
3.1	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●	●	●
3.2	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,16	0,13	0,10	●	●	●
3.3	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.4	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.5	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.6	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.7	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.8	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
4.1																					
4.2																					
4.3																					
4.4																					
4.5																					
4.6	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.7	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.8	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.9	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.10	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.11	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.12	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●		
4.13																					
4.14																					
4.15																					
4.16																					
4.17																					
4.18																					
4.19																					
5.1																					
5.2																					
5.3	0,05	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
5.4	0,05	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
5.5	0,05	0,04	0,03	0,06	0,03	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
5.6	0,05	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
5.7	0,05	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
5.8	0,05	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
5.9	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,08	0,07	0,05	●		
5.10	0,08	0,06	0,04	0,10	0,08	0,05	0,10	0,08	0,06	0,10	0,08	0,06	0,11	0,09	0,07	0,08	0,07	0,05	●		
5.11	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,08	0,07	0,05	●		
6.1																					
6.2																					
6.3																					
6.4																					
6.5																					

14

Plunging angle for ramping and helical milling: 3°

Cutting data – SilverLine – End Mills – 50 955 ... / 50 964 ... / 50 965 ... / 50 968 ...

	Type short	Type long / extra long	Type short / long	Type extra long	Ø DC = 3,0–3,5 mm			Ø DC = 4,0–4,5 mm			Ø DC = 5,0–5,5 mm			Ø DC = 6,0–7,0 mm			Ø DC = 8,0–9,0 mm		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min		$a_{p\,max}$ x DC	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	**240**	**192**	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
1.2	**250**	**200**	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
1.3	**210**	**168**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.4	**190**	**152**	1,0*	0,5	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
1.5	**200**	**160**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.6	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.7	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.8	**170**	**136**	1,0*	0,5	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
1.9	**160**	**128**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.10	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.11	**170**	**136**	1,0*	0,5	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
1.12	**190**	**152**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.13																			
1.14																			
1.15	**180**	**144**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.16	**150**	**120**	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
2.1	**130**	**100**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.2	**120**	**90**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.3	**100**	**80**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.4	**100**	**80**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.5	**120**	**90**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.6	**120**	**90**	1,0*	0,5	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
2.7	**30**	**24**	1,0*	0,5	0,011	0,010	0,007	0,016	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,00	0,03	0,02
3.1	200	160	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
3.2	160	128	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.3	190	152	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.4	150	120	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.5	180	144	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.6	160	128	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.7	180	144	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.8	160	128	1,0*	0,5	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
4.1																			
4.2																			
4.3																			
4.4																			
4.5																			
4.6	280	224	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.7	300	240	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.8	160	128	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.9	140	112	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.10	120	96	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.11	350	280	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.12	300	240	1,0*	0,5	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
4.13																			
4.14																			
4.15																			
4.16																			
4.17																			
4.18																			
4.19																			
5.1																			
5.2																			
5.3	**30**	**24**	0,5	0,25	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.4	**30**	**24**	0,5	0,25	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.5	**30**	**24**	0,5	0,25	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.6	**30**	**24**	0,5	0,25	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.7	**30**	**24**	0,5	0,25	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.8	**30**	**24**	0,5	0,25	0,013	0,010	0,007	0,018	0,014	0,010	0,026	0,019	0,013	0,034	0,025	0,017	0,04	0,03	0,02
5.9	**110**	**80**	0,5	0,25	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
5.10	**90**	**70**	0,5	0,25	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
5.11	**70**	**60**	0,5	0,25	0,015	0,012	0,008	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,04	0,03
6.1																			
6.2																			
6.3																			
6.4																			
6.5																			

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

„Extra long“ version: when profiling with an a_e of 0.1–0.4 x DC an a_p of 1.0 x DC should be used.

Index	Ø DC = 10,0–11,0 mm			Ø DC = 12,0 mm			Ø DC = 14,0–15,0 mm			Ø DC = 16,0–17,0 mm			Ø DC = 18,0–19,0 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●	○	○
1.2	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●	○	○
1.3	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.4	0,08	0,06	0,04	0,10	0,08	0,05	0,10	0,08	0,06	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●	○	○
1.5	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.6	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.7	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.8	0,08	0,06	0,04	0,10	0,08	0,05	0,10	0,08	0,06	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●	○	○
1.9	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.10	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.11	0,08	0,06	0,04	0,10	0,08	0,05	0,10	0,08	0,06	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●	○	○
1.12	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.13																					
1.14																					
1.15	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.16	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
2.1	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.2	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.3	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.4	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.5	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.6	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	●		
2.7	0,01	0,04	0,03	0,06	0,05	0,03	0,06	0,05	0,04	0,07	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,05	●		
3.1	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●	●	●
3.2	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.3	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.4	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.5	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.6	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.7	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.8	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
4.1																					
4.2																					
4.3																					
4.4																					
4.5																					
4.6	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,19	0,16	0,12	0,22	0,18	0,14	●		
4.7	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,19	0,16	0,12	0,22	0,18	0,14	●		
4.8	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,19	0,16	0,12	0,22	0,18	0,14	●		
4.9	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,19	0,16	0,12	0,22	0,18	0,14	●		
4.10	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,19	0,16	0,12	0,22	0,18	0,14	●		
4.11	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,18	0,14	0,11	0,19	0,15	0,12	●		
4.12	0,12	0,09	0,06	0,17	0,13	0,09	0,18	0,14	0,10	0,19	0,14	0,11	0,18	0,14	0,11	0,19	0,15	0,12	●		
4.13																					
4.14																					
4.15																					
4.16																					
4.17																					
4.18																					
4.19																					
5.1																					
5.2																					
5.3	0,05	0,04	0,03	0,07	0,05	0,04	0,07	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,09	0,07	0,05	●		
5.4	0,05	0,04	0,03	0,07	0,05	0,04	0,07	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,09	0,07	0,05	●		
5.5	0,05	0,04	0,03	0,07	0,03	0,04	0,07	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,09	0,07	0,05	●		
5.6	0,05	0,04	0,03	0,07	0,05	0,04	0,07	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,09	0,07	0,05	●		
5.7	0,05	0,04	0,03	0,07	0,05	0,04	0,07	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,09	0,07	0,05	●		
5.8	0,05	0,04	0,03	0,07	0,05	0,04	0,07	0,06	0,04	0,08	0,06	0,05	0,08	0,07	0,05	0,09	0,07	0,05	●		
5.9	0,10	0,08	0,05	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,09	0,16	0,13	0,10	0,17	0,14	0,11	●		
5.10	0,08	0,06	0,04	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
5.11	0,06	0,05	0,03	0,09	0,07	0,05	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,12	0,10	0,08	●		
6.1																					
6.2																					
6.3																					
6.4																					
6.5																					

Plunging angle for ramping and helical milling: 3°

Cutting data – SilverLine – End Mills – 50 954 ...

	Type short	Type long		Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min		$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	240	192	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.2	250	200	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.3	210	168	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.4	190	152	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.5	200	160	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.6	190	152	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.7	190	152	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.8	170	136	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.9	160	128	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.10	190	152	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.11	170	136	1,0*	0,019	0,015	0,011	0,027	0,021	0,015	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03
1.12	180	144	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.13																		
1.14																		
1.15	170	136	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
1.16	160	128	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
2.1																		
2.2																		
2.3																		
2.4																		
2.5																		
2.6																		
2.7																		
3.1	200	160	1,0*	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
3.2	180	144	1,0*	0,032	0,025	0,018	0,045	0,035	0,025	0,064	0,048	0,032	0,076	0,057	0,038	0,09	0,07	0,05
3.3	190	152	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.4	170	136	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.5	180	144	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.6	160	128	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.7	180	144	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
3.8	160	128	1,0*	0,025	0,020	0,014	0,036	0,028	0,020	0,054	0,040	0,027	0,066	0,049	0,033	0,08	0,06	0,04
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6																		
4.7																		
4.8																		
4.9																		
4.10																		
4.11																		
4.12																		
4.13																		
4.14																		
4.15																		
4.16																		
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9																		
5.10																		
5.11																		
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

Plunging angle for ramping and helical milling: 3°

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.2	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.3	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.4	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.5	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.6	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.7	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.8	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.9	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.10	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.11	0,08	0,06	0,04	0,10	0,08	0,05	0,10	0,08	0,06	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●	○	○
1.12	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	○	○
1.13																					
1.14																					
1.15	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	○
1.16	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	○
2.1																					
2.2																					
2.3																					
2.4																					
2.5																					
2.6																					
2.7																					
3.1	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●	●	●
3.2	0,12	0,09	0,06	0,14	0,10	0,07	0,16	0,12	0,09	0,17	0,13	0,10	0,17	0,14	0,11	0,19	0,16	0,12	●	●	●
3.3	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.4	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.5	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.6	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.7	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
3.8	0,10	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●	●	●
4.1																					
4.2																					
4.3																					
4.4																					
4.5																					
4.6																					
4.7																					
4.8																					
4.9																					
4.10																					
4.11																					
4.12																					
4.13																					
4.14																					
4.15																					
4.16																					
4.17																					
4.18																					
4.19																					
5.1																					
5.2																					
5.3																					
5.4																					
5.5																					
5.6																					
5.7																					
5.8																					
5.9																					
5.10																					
5.11																					
6.1																					
6.2																					
6.3																					
6.4																					
6.5																					

Cutting data standard values – SilverLine – End Mills – 50 959 ...

	Type long	Type extra long		Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
				$a_{e\,max.}$ 0,05 x DC	$a_{e\,max.}$ 0,05 x DC	$a_{e\,max.}$ 0,05 x DC	$a_{e\,max.}$ 0,05 x DC	$a_{e\,max.}$ 0,05 x DC
Index	v_c m/min		$a_{p\,max.}$	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.1	290	232	2xDC	0,066	0,08	0,10	0,12	0,14
1.2	300	240	2xDC	0,066	0,08	0,10	0,12	0,14
1.3	260	208	2xDC	0,066	0,08	0,10	0,12	0,14
1.4	250	200	2xDC	0,066	0,08	0,10	0,12	0,14
1.5	250	200	2xDC	0,066	0,08	0,10	0,12	0,14
1.6	230	184	2xDC	0,066	0,08	0,10	0,12	0,14
1.7	230	184	2xDC	0,066	0,08	0,10	0,12	0,14
1.8	220	176	2xDC	0,066	0,08	0,10	0,12	0,14
1.9	200	160	2xDC	0,066	0,08	0,10	0,12	0,14
1.10	230	184	2xDC	0,066	0,08	0,10	0,12	0,14
1.11	210	168	2xDC	0,050	0,06	0,08	0,10	0,10
1.12	220	176	2xDC	0,066	0,08	0,10	0,12	0,14
1.13	150	120	2xDC	0,042	0,05	0,06	0,08	0,09
1.14								
1.15	210	168	2xDC	0,066	0,08	0,10	0,12	0,14
1.16	200	160	2xDC	0,066	0,08	0,10	0,12	0,14
2.1	160	128	2xDC	0,042	0,05	0,06	0,08	0,09
2.2	150	120	2xDC	0,042	0,05	0,06	0,08	0,09
2.3	125	100	2xDC	0,042	0,05	0,06	0,08	0,09
2.4	150	120	2xDC	0,042	0,05	0,06	0,08	0,09
2.5	150	120	2xDC	0,042	0,05	0,06	0,08	0,09
2.6	150	120	2xDC	0,042	0,05	0,06	0,08	0,09
2.7	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
3.1	250	200	2xDC	0,076	0,09	0,12	0,14	0,17
3.2	220	176	2xDC	0,076	0,09	0,12	0,14	0,17
3.3	230	184	2xDC	0,066	0,08	0,10	0,12	0,14
3.4	210	168	2xDC	0,066	0,08	0,10	0,12	0,14
3.5	220	176	2xDC	0,066	0,08	0,10	0,12	0,14
3.6	200	160	2xDC	0,066	0,08	0,10	0,12	0,14
3.7	220	176	2xDC	0,066	0,08	0,10	0,12	0,14
3.8	200	160	2xDC	0,066	0,08	0,10	0,12	0,14
4.1								
4.2								
4.3								
4.4								
4.5								
4.6	350	280	2xDC	0,076	0,09	0,12	0,14	0,17
4.7	370	296	2xDC	0,076	0,09	0,12	0,14	0,17
4.8	300	240	2xDC	0,076	0,09	0,12	0,14	0,17
4.9	220	176	2xDC	0,076	0,09	0,12	0,14	0,17
4.10	180	144	2xDC	0,076	0,09	0,12	0,14	0,17
4.11	430	344	2xDC	0,076	0,09	0,12	0,14	0,17
4.12	370	296	2xDC	0,076	0,09	0,12	0,14	0,17
4.13								
4.14								
4.15								
4.16								
4.17								
4.18								
4.19								
5.1								
5.2								
5.3	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
5.4	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
5.5	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
5.6	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
5.7	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
5.8	40	32	2xDC	0,034	0,04	0,05	0,06	0,07
5.9	200	160	2xDC	0,066	0,08	0,10	0,12	0,14
5.10	175	140	2xDC	0,050	0,06	0,08	0,10	0,10
5.11	125	100	2xDC	0,042	0,05	0,06	0,08	0,09
6.1								
6.2								
6.3								
6.4								
6.5								

	Ø DC = 20 mm	Ø DC = 25 mm	● 1st choice		○ suitable
	$a_{e\,max.}$ 0,05 x DC	$a_{e\,max.}$ 0,05 x DC	Emulsion	Compressed air	MMS
Index	f_z mm	f_z mm			
1.1	0,16	0,18	●	○	○
1.2	0,16	0,18	●	○	○
1.3	0,16	0,18	●	○	○
1.4	0,16	0,18	●	○	○
1.5	0,16	0,18	●	○	○
1.6	0,16	0,18	●	○	○
1.7	0,16	0,18	●	○	○
1.8	0,16	0,18	●	○	○
1.9	0,16	0,18	●	○	○
1.10	0,16	0,18	●	○	○
1.11	0,13	0,14	●	○	○
1.12	0,16	0,18	●	○	○
1.13	0,11	0,12	●	○	○
1.14					
1.15	0,16	0,18	●	○	○
1.16	0,16	0,18	●	○	○
2.1	0,11	0,12	●		
2.2	0,11	0,12	●		
2.3	0,11	0,12	●		
2.4	0,11	0,12	●		
2.5	0,11	0,12	●		
2.6	0,11	0,12	●		
2.7	0,08	0,09	●		
3.1	0,19	0,21	●	●	●
3.2	0,19	0,21	●	●	●
3.3	0,16	0,18	●	●	●
3.4	0,16	0,18	●	●	●
3.5	0,16	0,18	●	●	●
3.6	0,16	0,18	●	●	●
3.7	0,16	0,18	●	●	●
3.8	0,16	0,18	●	●	●
4.1					
4.2					
4.3					
4.4					
4.5					
4.6	0,19	0,21	●		
4.7	0,19	0,21	●		
4.8	0,19	0,21	●		
4.9	0,19	0,21	●		
4.10	0,19	0,21	●		
4.11	0,19	0,21	●		
4.12	0,19	0,21	●		
4.13					
4.14					
4.15					
4.16					
4.17					
4.18					
4.19					
5.1					
5.2					
5.3	0,08	0,09	●		
5.4	0,08	0,09	●		
5.5	0,08	0,09	●		
5.6	0,08	0,09	●		
5.7	0,08	0,09	●		
5.8	0,08	0,09	●		
5.9	0,16	0,18	●		
5.10	0,13	0,14	●		
5.11	0,11	0,12	●		
6.1					
6.2					
6.3					
6.4					
6.5					

Cutting data – SilverLine – Torus End Mills – 50 962 ...

	Type short	Type long	Ø DCX = 6 mm			Ø DCX = 8 mm			Ø DCX = 10 mm			Ø DCX = 12 mm			Ø DCX = 14 mm			Ø DCX = 16 mm		
			a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX
Index	v_c m/min		f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1																				
1.2																				
1.3																				
1.4																				
1.5																				
1.6																				
1.7																				
1.8	170	136	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.9																				
1.10																				
1.11	170	136	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.12	190	152	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.13	130	104	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.14																				
1.15	120	96	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.16	120	96	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
2.1																				
2.2																				
2.3																				
2.4																				
2.5																				
2.6																				
2.7																				
3.1	250	200	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.2	230	184	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.3	200	160	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.4	180	144	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.5	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.6	210	168	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.7	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.8	210	168	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6																				
4.7																				
4.8																				
4.9																				
4.10																				
4.11																				
4.12																				
4.13																				
4.14																				
4.15																				
4.16																				
4.17																				
4.18																				
4.19																				
5.1																				
5.2																				
5.3																				
5.4																				
5.5																				
5.6																				
5.7																				
5.8																				
5.9																				
5.10																				
5.11																				
6.1	**160**	**128**	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
6.2	**120**	**96**	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
6.3	**80**	**64**	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
6.4																				
6.5																				

$a_{e\,max.}$ = 0.5 x DC / $a_{p\,max.}$ = 0.03 x DC

Plunging angle for ramping and helical milling: 3°

Index	Ø DCX = 18 mm			Ø DCX = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	Emulsion	Compressed air	MMS
	f_z mm			f_z mm					
1.1									
1.2									
1.3									
1.4									
1.5									
1.6									
1.7									
1.8	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.9									
1.10									
1.11	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.12	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.13	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.14									
1.15	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.16	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
2.1									
2.2									
2.3									
2.4									
2.5									
2.6									
2.7									
3.1	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.2	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.3	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.4	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.5	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.6	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.7	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.8	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
4.1									
4.2									
4.3									
4.4									
4.5									
4.6									
4.7									
4.8									
4.9									
4.10									
4.11									
4.12									
4.13									
4.14									
4.15									
4.16									
4.17									
4.18									
4.19									
5.1									
5.2									
5.3									
5.4									
5.5									
5.6									
5.7									
5.8									
5.9									
5.10									
5.11									
6.1	0,63	0,52	0,40	0,71	0,58	0,45		●	●
6.2	0,63	0,52	0,40	0,71	0,58	0,45		●	●
6.3	0,63	0,52	0,40	0,71	0,58	0,45		●	●
6.4									
6.5									

Cutting data – SilverLine – Torus End Mills – 50 961 ...

	Type short	Type long	Ø DCX = 6 mm			Ø DCX = 8 mm			Ø DCX = 10 mm			Ø DCX = 12 mm			Ø DCX = 14 mm			Ø DCX = 16 mm		
			a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX
Index	v_c m/min		f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.2	230	184	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.3	240	192	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.4	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.5	210	168	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.6	190	152	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
1.7	200	160	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.8	180	144	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,73	0,57	0,40	0,59	0,45	0,35
1.9																				
1.10	180	144	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.11	170	136	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
1.12	180	144	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
1.13	150	120	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
1.14																				
1.15	150	120	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
1.16	150	120	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,50	0,37	0,25	0,55	0,42	0,30	0,59	0,45	0,35
2.1																				
2.2																				
2.3																				
2.4																				
2.5																				
2.6																				
2.7																				
3.1	250	200	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.2	230	184	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.3	200	160	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.4	180	144	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.5	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.6	210	168	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.7	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
3.8	210	168	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6	250	200	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
4.7																				
4.8	220	176	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
4.9																				
4.10	180	144	0,40	0,30	0,20	0,50	0,37	0,25	0,60	0,45	0,30	0,70	0,52	0,35	0,73	0,57	0,40	0,76	0,58	0,45
4.11																				
4.12																				
4.13																				
4.14																				
4.15																				
4.16																				
4.17																				
4.18																				
4.19																				
5.1																				
5.2																				
5.3																				
5.4																				
5.5																				
5.6																				
5.7																				
5.8																				
5.9																				
5.10																				
5.11																				
6.1																				
6.2	120	96	0,10	0,07	0,05	0,20	0,15	0,10	0,30	0,22	0,15	0,40	0,30	0,20	0,46	0,35	0,25	0,51	0,39	0,30
6.3																				
6.4																				
6.5																				

$a_{e\,max.}$ = 0.5 x DC / $a_{p\,max.}$ = 0.05 x DC

Plunging angle for ramping and helical milling: 3°

Index	Ø DCX = 18 mm			Ø DCX = 20 mm			● 1st choice		○ suitable
	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	a_p 0,1–0,2 x DCX	a_p 0,3–0,4 x DCX	a_p 0,6–1,0 x DCX	Emulsion	Compressed air	MMS
	f_z mm			f_z mm					
1.1	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.2	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.3	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.4	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.5	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.6	0,63	0,52	0,40	0,71	0,58	0,45	●	○	○
1.7	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.8	0,63	0,52	0,40	0,71	0,58	0,45	●	○	○
1.9									
1.10	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.11	0,63	0,52	0,40	0,71	0,58	0,45	●	○	○
1.12	0,63	0,52	0,40	0,71	0,58	0,45	●	○	○
1.13	0,79	0,65	0,50	0,87	0,71	0,55	●	○	○
1.14									
1.15	0,63	0,52	0,40	0,71	0,58	0,45	●	○	○
1.16	0,63	0,52	0,40	0,71	0,58	0,45	●	○	○
2.1									
2.2									
2.3									
2.4									
2.5									
2.6									
2.7									
3.1	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.2	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.3	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.4	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.5	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.6	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.7	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
3.8	0,79	0,65	0,50	0,87	0,71	0,55	●	●	●
4.1									
4.2									
4.3									
4.4									
4.5									
4.6	0,79	0,65	0,50	0,87	0,71	0,55	●		
4.7									
4.8	0,87	0,71	0,55	0,87	0,71	0,55	●		
4.9									
4.10	0,79	0,65	0,50	0,87	0,71	0,55	●		
4.11									
4.12									
4.13									
4.14									
4.15									
4.16									
4.17									
4.18									
4.19									
5.1									
5.2									
5.3									
5.4									
5.5									
5.6									
5.7									
5.8									
5.9									
5.10									
5.11									
6.1									
6.2	0,55	0,45	0,35	0,63	0,52	0,40		●	●
6.3									
6.4									
6.5									

Cutting data standard values – S-Cut – End mills – SC-UNI, short – long

	Type short / long		Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
			a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	105–240	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
1.2	105–250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
1.3	90–210	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
1.4	80–190	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
1.5	90–200	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
1.6	90–190	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
1.7	80–190	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
1.8	70–170	1,0	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058
1.9	70–170	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
1.10	70–190	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
1.11	70–170	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
1.12	70–190	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
1.13	70–150	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046
1.14	50–120	1,0	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,058	0,035
1.15	70–180	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
1.16	80–160	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
2.1	90–130	1,0	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058
2.2	80–120	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046
2.3	80–120	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046
2.4	80–120	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046
2.5	80–120	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046
2.6	80–120	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046
2.7	40–60	1,0	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035
3.1	200–240	1,0	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081
3.2	180–220	1,0	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081
3.3	200–240	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
3.4	180–220	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
3.5	160–200	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
3.6	140–180	1,0	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058
3.7	160–200	1,0	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058
3.8	140–180	1,0	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6	140–280	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
4.7	120–300	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
4.8	110–180	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
4.9	90–160	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
4.10	80–140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
4.11	150–350	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
4.12	140–300	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
4.13																	
4.14	180–400	1,0	0,077	0,060	0,044	0,108	0,084	0,061	0,155	0,116	0,078	0,207	0,154	0,104	0,276	0,207	0,138
4.15																	
4.16																	
4.17																	
4.18	60–120	0,5	0,031	0,024	0,017	0,044	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,115	0,081	0,058
4.19	40–80	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,021	0,026	0,069	0,052	0,035	0,092	0,069	0,046
5.1	30	0,5	0,025	0,020	0,014	0,035	0,026	0,020	0,049	0,037	0,025	0,067	0,049	0,033	0,092	0,069	0,046
5.2	30	0,5	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
5.3	30	0,5	0,021	0,016	0,012	0,029	0,022	0,016	0,041	0,031	0,021	0,055	0,041	0,028	0,069	0,058	0,035
5.4	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
5.5	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
5.6	30	0,5	0,013	0,014	0,007	0,018	0,014	0,010	0,026	0,020	0,013	0,035	0,025	0,017	0,046	0,035	0,023
5.7	45	0,5	0,018	0,008	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
5.8	30	0,5	0,018	0,008	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
5.9	80–160	0,5	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058
5.10	80–140	0,5	0,029	0,022	0,016	0,040	0,031	0,022	0,058	0,043	0,029	0,076	0,056	0,038	0,104	0,081	0,058
5.11	50–100	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
6.1	120–160	0,5	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
6.2	80–120	0,3	0,021	0,016	0,012	0,029	0,022	0,016	0,041	0,031	0,021	0,055	0,041	0,028	0,069	0,058	0,035
6.3	60–100	0,2	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
6.4																	
6.5																	

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.
With an a_p of 2.0 x DC the f_z should be multiplied by 0.5.

Plunging angle for ramping and helical milling: 3°

	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm			Ø DC = 25 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
Index	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			Emulsion	Compressed air	MMS
1.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
1.2	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●	○	○
1.3	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●	○	○
1.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
1.5	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
1.6	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
1.7	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
1.8	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●	○	○
1.9	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
1.10	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
1.11	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
1.12	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
1.13	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●	○	○
1.14	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●	○	○
1.15	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
1.16	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
2.1	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
2.2	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
2.3	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
2.4	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
2.5	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
2.6	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
2.7	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
3.1	0,207	0,150	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,230	0,184	0,365	0,292	0,234		●	
3.2	0,207	0,150	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,230	0,184	0,365	0,292	0,234		●	
3.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204		●	
3.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204		●	
3.5	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204		●	
3.6	0,150	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,263	0,219	0,161		●	
3.7	0,150	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,263	0,219	0,161		●	
3.8	0,150	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,263	0,219	0,161		●	
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●		○
4.7	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●		○
4.8	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●		○
4.9	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●		○
4.10	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●		○
4.11	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,127	0,230	0,184	0,138	0,292	0,234	0,175	●		○
4.12	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●		○
4.13																		
4.14	0,345	0,253	0,173	0,380	0,288	0,196	0,414	0,311	0,242	0,495	0,403	0,311	0,628	0,511	0,394	●		○
4.15																		
4.16																		
4.17																		
4.18	0,138	0,104	0,069	0,115	0,115	0,081	0,161	0,127	0,092	0,196	0,161	0,127	0,248	0,204	0,161	●		○
4.19	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●		○
5.1	0,115	0,081	0,058	0,127	0,092	0,058	0,127	0,104	0,081	0,161	0,127	0,104	0,204	0,161	0,131	●		
5.2	0,104	0,081	0,058	0,115	0,046	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117	●		
5.3	0,092	0,069	0,046	0,104	0,081	0,046	0,115	0,081	0,069	0,127	0,104	0,081	0,161	0,131	0,102	●		
5.4	0,081	0,058	0,046	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
5.5	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
5.6	0,058	0,046	0,035	0,069	0,046	0,035	0,069	0,058	0,046	0,081	0,069	0,058	0,102	0,088	0,073	●		
5.7	0,081	0,058	0,046	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
5.8	0,081	0,058	0,046	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
5.9	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
5.10	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
5.11	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●		
6.1	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117	●		
6.2	0,092	0,069	0,046	0,104	0,081	0,046	0,115	0,081	0,069	0,127	0,104	0,081	0,161	0,131	0,102	●		
6.3	0,081	0,058	0,046	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
6.4																		
6.5																		

Cutting data standard values – S-Cut – End mills – SC-UNI, extra long

	Type extra long			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max}$ x DC		f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	90–180	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
1.2	90–180	1,0	0,5	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	0,161	0,115	0,081	0,173	0,127	0,092
1.3	70–160	1,0	0,5	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	0,161	0,115	0,081	0,173	0,127	0,092
1.4	70–140	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
1.5	70–160	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
1.6	70–160	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
1.7	70–140	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
1.8	50–120	1,0	0,5	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058	0,127	0,092	0,069	0,138	0,104	0,069
1.9	50–120	1,0	0,5	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
1.10	50–120	1,0	0,5	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
1.11	50–120	1,0	0,5	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
1.12	50–120	1,0	0,5	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
1.13	50–120	1,0	0,5	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	0,104	0,081	0,046	0,115	0,081	0,058
1.14	40–80	1,0	0,5	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,058	0,035	0,092	0,069	0,046	0,092	0,069	0,046
1.15	50–120	1,0	0,5	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
1.16	60–140	1,0	0,5	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
2.1	60–100	1,0	0,5	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058	0,127	0,092	0,069	0,138	0,104	0,069
2.2	50–80	1,0	0,5	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	0,104	0,081	0,046	0,115	0,081	0,058
2.3	50–80	1,0	0,5	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	0,104	0,081	0,046	0,115	0,081	0,058
2.4	50–80	1,0	0,5	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	0,104	0,081	0,046	0,115	0,081	0,058
2.5	50–80	1,0	0,5	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	0,104	0,081	0,046	0,115	0,081	0,058
2.6	50–80	1,0	0,5	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	0,104	0,081	0,046	0,115	0,081	0,058
2.7	30–50	1,0	0,5	0,039	0,029	0,020	0,054	0,039	0,026	0,069	0,058	0,035	0,092	0,069	0,046	0,092	0,069	0,046
3.1	160–200	1,0	0,5	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081	0,207	0,150	0,104	0,219	0,161	0,115
3.2	120–160	1,0	0,5	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081	0,207	0,150	0,104	0,219	0,161	0,115
3.3	160–200	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
3.4	120–160	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
3.5	120–160	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
3.6	100–140	1,0	0,5	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058	0,150	0,104	0,069	0,161	0,115	0,081
3.7	120–160	1,0	0,5	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058	0,150	0,104	0,069	0,161	0,115	0,081
3.8	100–140	1,0	0,5	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058	0,150	0,104	0,069	0,161	0,115	0,081
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6	100–240	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
4.7	90–220	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
4.8	80–180	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
4.9	60–160	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
4.10	60–140	1,0	0,5	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	0,173	0,127	0,092	0,196	0,138	0,092
4.11	110–320	1,0	0,5	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	0,161	0,115	0,081	0,173	0,127	0,092
4.12	100–300	1,0	0,5	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	0,161	0,115	0,081	0,173	0,127	0,092
4.13																		
4.14	120–400	1,0	0,5	0,155	0,116	0,078	0,207	0,154	0,104	0,276	0,207	0,138	0,345	0,253	0,173	0,380	0,288	0,196
4.15																		
4.16																		
4.17																		
4.18	40–120	0,5	0,25	0,062	0,046	0,031	0,083	0,062	0,041	0,115	0,081	0,058	0,138	0,104	0,069	0,115	0,115	0,081
4.19	30–80	0,5	0,25	0,052	0,021	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
5.1	30	0,5	0,25	0,049	0,037	0,025	0,067	0,049	0,033	0,092	0,069	0,046	0,115	0,081	0,058	0,127	0,092	0,058
5.2	30	0,5	0,25	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	0,104	0,081	0,058	0,115	0,046	0,058
5.3	25	0,5	0,25	0,041	0,031	0,021	0,055	0,041	0,028	0,069	0,058	0,035	0,092	0,069	0,046	0,104	0,081	0,046
5.4	25	0,5	0,25	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	0,081	0,058	0,046	0,092	0,069	0,046
5.5	25	0,5	0,25	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	0,081	0,058	0,046	0,092	0,069	0,046
5.6	25	0,5	0,25	0,026	0,020	0,013	0,035	0,025	0,017	0,046	0,035	0,023	0,058	0,046	0,035	0,069	0,046	0,035
5.7	45	0,5	0,25	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	0,081	0,058	0,046	0,092	0,069	0,046
5.8	25	0,5	0,25	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	0,081	0,058	0,046	0,092	0,069	0,046
5.9	35–65	0,5	0,25	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058	0,127	0,092	0,069	0,138	0,104	0,069
5.10	30–55	0,5	0,25	0,058	0,043	0,029	0,076	0,056	0,038	0,104	0,081	0,046	0,127	0,092	0,069	0,138	0,104	0,069
5.11	30–55	0,5	0,25	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	0,115	0,092	0,058	0,127	0,092	0,069
6.1	80–120	0,5	0,5	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	0,104	0,081	0,058	0,115	0,081	0,058
6.2	60–100	0,5	0,3	0,041	0,031	0,021	0,055	0,041	0,028	0,069	0,058	0,035	0,092	0,069	0,046	0,104	0,081	0,046
6.3	50–90	0,5	0,15	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	0,081	0,058	0,046	0,092	0,069	0,046
6.4																		
6.5																		

Plunging angle for ramping and helical milling: 3°

	Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 20 mm			Ø DC = 25 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,5 x DC	a_e 0,6–1,0 x DC			
Index	f_z mm			f_z mm			f_z mm			f_z mm			Emulsion	Compressed air	MMS
1.1	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
1.2	0,173	0,138	0,092	0,173	0,150	0,115	0,230	0,184	0,138	0,276	0,230	0,184	●	○	○
1.3	0,173	0,138	0,092	0,173	0,150	0,115	0,230	0,184	0,138	0,276	0,230	0,184	●	○	○
1.4	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
1.5	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
1.6	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
1.7	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
1.8	0,138	0,115	0,081	0,138	0,115	0,092	0,184	0,150	0,115	0,219	0,184	0,150	●	○	○
1.9	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
1.10	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
1.11	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
1.12	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
1.13	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,184	0,150	0,115	●	○	○
1.14	0,092	0,069	0,058	0,092	0,081	0,058	0,127	0,104	0,081	0,150	0,127	0,104	●	○	○
1.15	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
1.16	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
2.1	0,138	0,115	0,081	0,138	0,115	0,092	0,184	0,150	0,115	0,219	0,184	0,150	●		
2.2	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,184	0,150	0,115	●		
2.3	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,184	0,150	0,115	●		
2.4	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,184	0,150	0,115	●		
2.5	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,184	0,150	0,115	●		
2.6	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,184	0,150	0,115	●		
2.7	0,092	0,069	0,058	0,092	0,081	0,058	0,127	0,104	0,081	0,150	0,127	0,104	●		
3.1	0,219	0,173	0,127	0,230	0,184	0,138	0,288	0,230	0,184	0,345	0,288	0,230	○	●	○
3.2	0,219	0,173	0,127	0,230	0,184	0,138	0,288	0,230	0,184	0,345	0,288	0,230	○	●	○
3.3	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
3.4	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
3.5	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
3.6	0,161	0,127	0,092	0,161	0,127	0,104	0,207	0,173	0,127	0,242	0,207	0,173	○	●	○
3.7	0,161	0,127	0,092	0,161	0,127	0,104	0,207	0,173	0,127	0,242	0,207	0,173	○	●	○
3.8	0,161	0,127	0,092	0,161	0,127	0,104	0,207	0,173	0,127	0,242	0,207	0,173	○	●	○
4.1															
4.2															
4.3															
4.4															
4.5															
4.6	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●		○
4.7	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●		○
4.8	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●		○
4.9	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●		○
4.10	0,184	0,150	0,104	0,196	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●		○
4.11	0,173	0,138	0,092	0,173	0,150	0,115	0,230	0,184	0,138	0,276	0,230	0,184	●		○
4.12	0,173	0,138	0,092	0,173	0,150	0,115	0,230	0,184	0,138	0,276	0,230	0,184	●		○
4.13															
4.14	0,380	0,299	0,207	0,380	0,311	0,242	0,495	0,403	0,311	0,587	0,495	0,403	●		○
4.15															
4.16															
4.17															
4.18	0,150	0,115	0,081	0,150	0,127	0,092	0,196	0,161	0,127	0,230	0,196	0,161	●		○
4.19	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●		○
5.1	0,127	0,092	0,069	0,127	0,104	0,081	0,161	0,127	0,104	0,196	0,161	0,127	●		
5.2	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127	●		
5.3	0,104	0,081	0,058	0,104	0,081	0,069	0,127	0,104	0,081	0,150	0,127	0,104	●		
5.4	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
5.5	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
5.6	0,069	0,046	0,035	0,069	0,058	0,046	0,081	0,069	0,058	0,092	0,081	0,069	●		
5.7	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
5.8	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
5.9	0,138	0,115	0,081	0,138	0,115	0,092	0,184	0,150	0,115	0,219	0,184	0,150	●		
5.10	0,138	0,104	0,081	0,138	0,115	0,092	0,184	0,150	0,115	0,219	0,184	0,150	●		
5.11	0,127	0,104	0,069	0,127	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●		
6.1	0,115	0,092	0,058	0,115	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
6.2	0,104	0,081	0,058	0,104	0,081	0,069	0,127	0,104	0,081	0,150	0,127	0,104		●	
6.3	0,092	0,069	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092		●	
6.4															
6.5															

14

Cutting data standard values – S-Cut – End mills – SC-UNI, ZEFP = 5, long

Index	Type long	max. angle of engagement	Ø DC = 6 mm				Ø DC = 8 mm				Ø DC = 10 mm				Ø DC = 12 mm			
			a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
	v_c m/min		f_z mm				f_z mm				f_z mm				f_z mm			
1.1	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
1.2	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
1.3	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
1.4	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
1.5	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.6	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.7	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.8	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.9	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.10	240	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.11	240	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.12	240	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.13	240	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.14																		
1.15	220	45°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
1.16	220	45°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
2.1	200	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
2.2	180	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
2.3	160	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
2.4	160	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
2.5	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
2.6	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
2.7	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
3.1	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
3.2	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
3.3	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
3.4	260	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
3.5	260	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
3.6	240	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
3.7	240	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
3.8	200	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6																		
4.7																		
4.8																		
4.9																		
4.10																		
4.11																		
4.12																		
4.13																		
4.14																		
4.15																		
4.16																		
4.17																		
4.18																		
4.19																		
5.1	120	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.2	80	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.3	80	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.4	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.5	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.6	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.7	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.8	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
5.9	140	40°	0,045	0,032	0,026	0,010	0,072	0,051	0,041	0,016	0,089	0,063	0,052	0,020	0,112	0,079	0,065	0,025
5.10	120	40°	0,045	0,032	0,026	0,010	0,072	0,051	0,041	0,016	0,089	0,063	0,052	0,020	0,112	0,079	0,065	0,025
5.11	100	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		

Cutting depth corresponding to the cutting length

Index	Ø DC = 16 mm				Ø DC = 20 mm				● 1st choice		○ suitable
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z mm				f_z mm						
1.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
1.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
1.3	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
1.4	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
1.5	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.6	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.7	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.8	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.9	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.10	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.11	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.12	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.13	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.14											
1.15	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
1.16	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
2.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
2.2	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
2.3	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
2.4	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
2.5	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
2.6	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
2.7	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
3.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
3.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
3.3	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
3.4	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
3.5	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
3.6	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
3.7	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
3.8	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
4.1											
4.2											
4.3											
4.4											
4.5											
4.6											
4.7											
4.8											
4.9											
4.10											
4.11											
4.12											
4.13											
4.14											
4.15											
4.16											
4.17											
4.18											
4.19											
5.1	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.2	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.3	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.4	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.5	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.6	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.7	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.8	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
5.9	0,157	0,111	0,090	0,035	0,219	0,155	0,127	0,049	●		
5.10	0,157	0,111	0,090	0,035	0,219	0,155	0,127	0,049	●		
5.11	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
6.1											
6.2											
6.3											
6.4											
6.5											

Cutting data standard values – BlueLine – End mills 52 133 ... / 52 134 ... / 52 140 ... /

	52 140... 52 141...	52 133... 52 134... 52 324...		Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm	Ø DC = 20 mm
	Compressed air	Compressed air		a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040
1.15	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040
1.16	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040
6.1	**180**	**160**	1,0	0,015	0,015	0,018	0,020	0,022	0,026	0,030	0,033	0,035
6.2	**160**	**140**	1,0	0,013	0,013	0,016	0,018	0,020	0,023	0,025	0,029	0,032
6.3	**140**	**130**	1,0	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027
6.4	**100**	**90**	1,0	0,010	0,010	0,012	0,014	0,016	0,018	0,020	0,023	0,025

Cutting data standard values – BlueLine – End mills 52 135 ... / 52 136 ... / 52 325 ... /

	Compressed air		Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm	Ø DC = 20 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035
1.15	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035
1.16	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035
6.1	**140**	**1,0**	0,010	0,011	0,012	0,015	0,018	0,023	0,028	0,029	0,030
6.2	**125**	**1,0**	0,008	0,009	0,011	0,014	0,016	0,020	0,023	0,026	0,028
6.3	**115**	**1,0**	0,007	0,008	0,009	0,012	0,014	0,017	0,020	0,023	0,025
6.4	**80**	**1,0**	0,005	0,006	0,007	0,010	0,012	0,015	0,017	0,019	0,020

Cutting data standard values – BlueLine – Ball-nosed end mills 52 258 ... / 52 259 ...



	Compressed air		Ø DC = 0,1–0,5 mm	Ø DC = 0,5–1,0 mm	Ø DC = 1,5–2,0 mm	Ø DC = 2,0–2,5 mm	Ø DC = 2,5–3,0 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
1.15	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
1.16	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
6.1	**185**	**0,05**	0,005	0,005	0,006	0,008	0,010	0,015	0,020	0,030	0,040	0,050
6.2	**165**	**0,05**	0,004	0,005	0,006	0,008	0,010	0,014	0,017	0,028	0,038	0,048
6.3	**145**	**0,05**	0,004	0,004	0,005	0,006	0,008	0,012	0,015	0,025	0,035	0,045
6.4	**105**	**0,05**	0,003	0,004	0,005	0,005	0,006	0,010	0,014	0,022	0,030	0,040

Cutting data standard values – BlueLine – Ball-nosed end mills 52 256 ... / 52 257 ... /

	Compressed air		Ø DC = 0,1–0,5 mm	Ø DC = 0,5–1,0 mm	Ø DC = 1,0–1,5 mm	Ø DC = 1,5–2,0 mm	Ø DC = 2,0–2,5 mm	Ø DC = 2,5–3,0 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 7 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	0,05	0,010	0,011	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040
1.15	200	0,05	0,010	0,011	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040
1.16	200	0,05	0,010	0,011	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040
6.1	**190**	**0,05**	0,006	0,006	0,006	0,008	0,011	0,015	0,020	0,025	0,030	0,038
6.2	**170**	**0,05**	0,005	0,006	0,006	0,008	0,011	0,015	0,020	0,024	0,027	0,035
6.3	**150**	**0,05**	0,005	0,006	0,006	0,008	0,010	0,013	0,018	0,022	0,025	0,032
6.4	**110**	**0,05**	0,004	0,005	0,005	0,007	0,009	0,013	0,016	0,021	0,025	0,030

52 141 ... / 52 324 ...



Index	52 140... 52 141... Compressed air v_c m/min	52 133... 52 134... 52 324... Compressed air v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 3 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 4 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 5 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 6 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 8 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 10 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 12 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 16 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 20 mm a_e 0,6–1,0 x DC f_z mm
1.14	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040
1.15	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040
1.16	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040
6.1	**180**	**160**	0,05	0,015	0,015	0,018	0,020	0,022	0,026	0,030	0,033	0,035
6.2	**160**	**140**	0,05	0,013	0,013	0,016	0,018	0,020	0,023	0,025	0,029	0,032
6.3	**140**	**130**	0,05	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027
6.4	**100**	**90**	0,05	0,010	0,010	0,012	0,014	0,016	0,018	0,020	0,023	0,025

52 326 ...



Index	Compressed air v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 3 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 4 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 5 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 6 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 8 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 10 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 12 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 16 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 20 mm a_e 0,6–1,0 x DC f_z mm
1.14	140	0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035
1.15	140	0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035
1.16	140	0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035
6.1	**140**	0,05	0,010	0,011	0,012	0,015	0,018	0,023	0,028	0,029	0,030
6.2	**125**	0,05	0,008	0,009	0,011	0,014	0,016	0,020	0,023	0,026	0,028
6.3	**115**	0,05	0,007	0,008	0,009	0,012	0,014	0,017	0,020	0,023	0,025
6.4	**80**	0,05	0,005	0,006	0,007	0,010	0,012	0,015	0,017	0,019	0,020

Index	Ø DC = 12 mm a_e 0,05 x DC f_z mm	Ø DC = 16 mm a_e 0,05 x DC f_z mm	Ø DC = 20 mm a_e 0,05 x DC f_z mm
1.14	0,070	0,090	0,100
1.15	0,070	0,090	0,100
1.16	0,070	0,090	0,100
6.1	0,060	0,080	0,090
6.2	0,058	0,078	0,085
6.3	0,055	0,075	0,080
6.4	0,050	0,070	0,070

52 302 ... / 52 303 ... / 52 404 ... / 52 405 ...

Index	Ø DC = 8 mm a_e 0,05 x DC f_z mm	Ø DC = 9 mm a_e 0,05 x DC f_z mm	Ø DC = 10 mm a_e 0,05 x DC f_z mm	Ø DC = 12 mm a_e 0,05 x DC f_z mm	Ø DC = 14 mm a_e 0,05 x DC f_z mm	Ø DC = 16 mm a_e 0,05 x DC f_z mm	Ø DC = 20 mm a_e 0,05 x DC f_z mm
1.14	0,050	0,060	0,070	0,080	0,090	0,100	0,120
1.15	0,050	0,060	0,070	0,080	0,090	0,100	0,120
1.16	0,050	0,060	0,070	0,080	0,090	0,100	0,120
6.1	0,044	0,050	0,060	0,070	0,080	0,090	0,110
6.2	0,042	0,048	0,058	0,068	0,078	0,088	0,105
6.3	0,039	0,045	0,055	0,065	0,075	0,085	0,100
6.4	0,035	0,040	0,050	0,060	0,070	0,080	0,090

Cutting data standard values – BlueLine – torus cutters 52 304 ...

	Compressed air		Ø DC = 0,5–1,5 mm	Ø DC = 2,0–3,0 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120
1.15	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120
1.16	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120
6.1	**180**	1,0	0,008	0,025	0,050	0,050	0,060	0,070	0,085	0,095	0,115
6.2	**160**	1,0	0,007	0,023	0,040	0,040	0,055	0,070	0,082	0,090	0,110
6.3	**140**	1,0	0,006	0,020	0,038	0,038	0,058	0,065	0,080	0,085	0,105
6.4	**100**	1,0	0,005	0,018	0,035	0,035	0,060	0,060	0,075	0,080	0,100

Cutting data standard values – BlueLine – torus cutters 52 305 ...



	Compressed air		Ø DC = 1,0–1,5 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060
1.15	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060
1.16	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060
6.1	**180**	1,0	0,006	0,022	0,022	0,045	0,045	0,055
6.2	**160**	1,0	0,005	0,020	0,020	0,035	0,035	0,050
6.3	**140**	1,0	0,004	0,017	0,017	0,033	0,033	0,053
6.4	**100**	1,0	0,003	0,015	0,015	0,030	0,030	0,050



	Compressed air		Ø DC = 0,5–1,5 mm	Ø DC = 2,0–3,0 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140
1.15	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140
1.16	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140
6.1	**180**	0,05	0,012	0,030	0,055	0,055	0,075	0,085	0,095	0,105	0,135
6.2	**160**	0,05	0,011	0,028	0,050	0,050	0,070	0,080	0,090	0,100	0,130
6.3	**140**	0,05	0,010	0,025	0,044	0,044	0,070	0,075	0,088	0,085	0,125
6.4	**100**	0,05	0,090	0,021	0,040	0,040	0,065	0,070	0,085	0,090	0,120

	Compressed air		Ø DC = 1,0–1,5 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070
1.15	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070
1.16	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070
6.1	**180**	0,05	0,010	0,027	0,027	0,050	0,050	0,065
6.2	**160**	0,05	0,009	0,025	0,025	0,045	0,045	0,060
6.3	**140**	0,05	0,008	0,022	0,022	0,040	0,039	0,063
6.4	**100**	0,05	0,007	0,018	0,018	0,035	0,035	0,060

Cutting data standard values – BlueLine – End mills – 52 344 ...

Index	Compressed air: v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 0,5 mm			Ø DC = 1,0–1,5 mm			Ø DC = 2,0–2,5 mm			Ø DC = 3,0–3,5 mm			Ø DC = 4,0 mm			Ø DC = 5,0 mm		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.14	120	**0,5**	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
1.15	120	**0,5**	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
1.16	120	**0,5**	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
6.1	**110**	**0,5**	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
6.2	**80**	**0,5**	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
6.3	**60**	**0,5**	0,004	0,004	0,003	0,006	0,005	0,004	0,009	0,007	0,005	0,013	0,010	0,007	0,017	0,013	0,010	0,022	0,016	0,011
6.4	**50**	**0,5**	0,004	0,003	0,002	0,005	0,004	0,003	0,007	0,006	0,004	0,011	0,008	0,006	0,014	0,011	0,008	0,018	0,013	0,009

Cutting data standard values – BlueLine – torus cutters – 52 361 ...



Index	Compressed air: v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 0,8–1,0 mm	Ø DC = 1,2–1,5 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,05**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
1.15	200	**0,05**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
1.16	200	**0,05**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
6.1	**190**	**0,05**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
6.2	**170**	**0,05**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
6.3	**150**	**0,05**	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096
6.4	**110**	**0,05**	0,005	0,007	0,010	0,020	0,030	0,050	0,060	0,070	0,080

Cutting data standard values – BlueLine – End mills – 52 353 ...



Index	Compressed air: v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,05**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
1.15	200	**0,05**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
1.16	200	**0,05**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
6.1	**190**	**0,05**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
6.2	**170**	**0,05**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
6.3	**150**	**0,05**	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108
6.4	**110**	**0,05**	0,005	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090

Cutting data standard values – BlueLine – End mills – 52 354 ...



Index	Compressed air: v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
			a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC	a_e 0,6-1,0 x DC
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,05**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
1.15	200	**0,05**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
1.16	200	**0,05**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
6.1	**190**	**0,05**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
6.2	**170**	**0,05**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
6.3	**150**	**0,05**	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054
6.4	**110**	**0,05**	0,003	0,005	0,010	0,015	0,020	0,025	0,030	0,035	0,040	0,045

Cutting data standard values – BlueLine – Ball nosed end mills – 52 352 ... / 52 355 ...

Index	Compressed air: v_c m/min	$a_{p\,max.}$ x DC	Ø DC = 0,6–0,8 mm	Ø DC = 1 mm	Ø DC = 1,2–1,5 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,05**	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120
1.15	200	**0,05**	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120
1.16	200	**0,05**	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120
6.1	**190**	**0,05**	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120
6.2	**170**	**0,05**	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120
6.3	**150**	**0,05**	0,004	0,006	0,008	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096
6.4	**110**	**0,05**	0,004	0,005	0,007	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080

	Ø DC = 6,0 mm			Ø DC = 8,0 mm			Ø DC = 10,0 mm			Ø DC = 12,0 mm			Ø DC = 16,0 mm			Ø DC = 20,0 mm		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.14	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060
1.15	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060
1.16	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060
6.1	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060
6.2	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060
6.3	0,029	0,021	0,014	0,038	0,029	0,019	0,043	0,032	0,022	0,048	0,036	0,024	0,061	0,046	0,036	0,076	0,062	0,048
6.4	0,024	0,018	0,012	0,032	0,024	0,016	0,036	0,027	0,018	0,040	0,030	0,020	0,051	0,039	0,030	0,063	0,052	0,040



	Compressed air		Ø DC = 0,8–1,0 mm	Ø DC = 1,2–1,5 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm
			a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC	a_e 0,1 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,50**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
1.15	200	**0,50**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
1.16	200	**0,50**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
6.1	**190**	**0,50**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
6.2	**170**	**0,50**	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120
6.3	**150**	**0,50**	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096
6.4	**110**	**0,50**	0,005	0,007	0,010	0,020	0,030	0,050	0,060	0,070	0,080



	Compressed air		Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,50**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
1.15	200	**0,50**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
1.16	200	**0,50**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
6.1	**190**	**0,50**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
6.2	**170**	**0,50**	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135
6.3	**150**	**0,50**	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108
6.4	**110**	**0,50**	0,005	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090



	Compressed air		Ø DC = 1 mm	Ø DC = 2 mm	Ø DC = 3 mm	Ø DC = 4 mm	Ø DC = 5 mm	Ø DC = 6 mm	Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	200	**0,50**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
1.15	200	**0,50**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
1.16	200	**0,50**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
6.1	**190**	**0,50**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
6.2	**170**	**0,50**	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068
6.3	**150**	**0,50**	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054
6.4	**110**	**0,50**	0,003	0,005	0,010	0,015	0,020	0,025	0,030	0,035	0,040	0,045

14

Cutting data standard values – BlueLine – End mills – 52 348 ...

	Compressed air		Ø DC = 6 mm		Ø DC = 8 mm		Ø DC = 10 mm		Ø DC = 12 mm		Ø DC = 16 mm		Ø DC = 20 mm	
			a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,07 x DC	a_e 0,1 x DC	a_e 0,07 x DC	a_e 0,1 x DC	a_e 0,07 x DC	a_e 0,1 x DC	a_e 0,07 x DC	a_e 0,1 x DC	a_e 0,07 x DC	a_e 0,1 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm											
1.14	120	**2,0**		0,021		0,024		0,027		0,032		0,038		0,045
1.15	120	**2,0**		0,021		0,024		0,027		0,032		0,038		0,045
1.16	120	**2,0**		0,021		0,024		0,027		0,032		0,038		0,045
6.1	**115**	**2,0**		0,021		0,024		0,027		0,032		0,038		0,045
6.2	**100**	**2,0**		0,021		0,024		0,027		0,032		0,038		0,045
6.3	**90**	**2,0**		0,017		0,019		0,022		0,025		0,030		0,036
6.4	**60**	**2,0**	0,014		0,016		0,018		0,021		0,025		0,030	

Cutting data standard values – BlueLine – End mills – 52 345 ... – 52 351 ... / 52 362 ...

	Compressed air		$T_X \leq 2,5 \times DC$											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	**0,50**	0,0038	0,0045	0,0150	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240
1.15	190	**0,50**	0,0038	0,0045	0,0150	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240
1.16	190	**0,50**	0,0038	0,0045	0,0150	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240
6.1	**180**	**0,50**	0,0038	0,0045	0,0150	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240
6.2	**120**	**0,50**	0,0038	0,0045	0,0150	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240
6.3	**70**	**0,50**	0,0030	0,0036	0,0120	0,0062	0,0074	0,0104	0,0132	0,0144	0,0156	0,0168	0,0180	0,0192
6.4	**50**	**0,50**	0,0025	0,0030	0,0100	0,0052	0,0062	0,0087	0,0110	0,0120	0,0130	0,0140	0,0150	0,0160

	Compressed air		$T_X = 2,6–5,0 \times DC$											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	171	**0,50**	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195
1.15	171	**0,50**	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195
1.16	171	**0,50**	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195
6.1	**162**	**0,50**	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195
6.2	**108**	**0,50**	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195
6.3	**63**	**0,50**	0,0030	0,0032	0,0036	0,0050	0,0060	0,0082	0,0107	0,0121	0,0126	0,0140	0,0156	0,0156
6.4	**45**	**0,50**	0,0025	0,0027	0,0030	0,0042	0,0050	0,0068	0,0089	0,0101	0,0105	0,0117	0,0130	0,0130

	Compressed air		$T_X = 5,1–10,0 \times DC$											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	152	**0,50**	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128
1.15	152	**0,50**	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128
1.16	152	**0,50**	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128
6.1	**144**	**0,50**	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128
6.2	**96**	**0,50**	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128
6.3	**56**	**0,50**	0,0024	0,0030	0,0036	0,0048	0,0054	0,0060	0,0066	0,0072	0,0084	0,0090	0,0096	0,0102
6.4	**40**	**0,50**	0,0020	0,0025	0,0030	0,0040	0,0045	0,0050	0,0055	0,0060	0,0070	0,0075	0,0080	0,0085

Cutting data standard values – BlueLine – End mills – 52 356 ...-52 360 ...

	Compressed air		$T_X \leq 2,5 \times DC$											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	190	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075
1.15	190	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075
1.16	190	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075
6.1	180	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075
6.2	120	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075
6.3	70	0,50	0,0012	0,0018	0,0024	0,0030	0,0036	0,0042	0,0048	0,0050	0,0053	0,0055	0,0058	0,0060
6.4	50	0,50	0,0010	0,0015	0,0020	0,0025	0,0030	0,0035	0,0040	0,0042	0,0044	0,0046	0,0048	0,0050

	Compressed air		$T_X = 2,6–5,0 \times DC$											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	171	**0,50**	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048
1.15	171	**0,50**	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048
1.16	171	**0,50**	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048
6.1	**162**	**0,50**	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048
6.2	**108**	**0,50**	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048
6.3	**63**	**0,50**	0,0008	0,0011	0,0014	0,0018	0,0020	0,0023	0,0025	0,0028	0,0030	0,0032	0,0035	0,0038
6.4	**45**	**0,50**	0,0007	0,0009	0,0012	0,0015	0,0017	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032

Compressed air

			T_x = 10,1–15,0 x DC											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	114	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066
1.15	114	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066
1.16	114	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066
6.1	108	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066
6.2	72	0,50	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066
6.3	42	0,50	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	0,0053
6.4	30	0,50	0,0010	0,0015	0,0020	0,0025	0,0030	0,0032	0,0034	0,0036	0,0038	0,0040	0,0042	0,0044

Compressed air

			T_x = 15,1–20,0 x DC											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	76	0,50	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063
1.15	76	0,50	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063
1.16	76	0,50	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063
6.1	72	0,50	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063
6.2	48	0,50	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063
6.3	28	0,50	0,0012	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050
6.4	20	0,50	0,0010	0,0010	0,0015	0,0020	0,0025	0,0030	0,0032	0,0034	0,0036	0,0038	0,0040	0,0042

Compressed air

			T_x = 20,1–30,0 x DC											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	57	0,50	0,001	0,002	0,002	0,003	0,003	0,003	0,004	0,004	0,004	0,005	0,005	0,005
1.15	57	0,50	0,001	0,002	0,002	0,003	0,003	0,003	0,004	0,004	0,004	0,005	0,005	0,005
1.16	57	0,50	0,001	0,002	0,002	0,003	0,003	0,003	0,004	0,004	0,004	0,005	0,005	0,005
6.1	54	0,50	0,001	0,002	0,002	0,003	0,003	0,003	0,004	0,004	0,004	0,005	0,005	0,005
6.2	36	0,50	0,001	0,002	0,002	0,003	0,003	0,003	0,004	0,004	0,004	0,005	0,005	0,005
6.3	21	0,50	0,001	0,001	0,002	0,002	0,002	0,003	0,003	0,003	0,003	0,004	0,004	0,004
6.4	15	0,50	0,0008	0,0010	0,0013	0,0017	0,0019	0,0022	0,0025	0,0027	0,0029	0,0030	0,0031	0,0032

Compressed air

			T_x = 5,1–10,0 x DC											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	152	0,50	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039
1.15	152	0,50	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039
1.16	152	0,50	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039
6.1	144	0,50	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039
6.2	96	0,50	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039
6.3	56	0,50	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0024	0,0026	0,0029	0,0031
6.4	40	0,50	0,0004	0,0006	0,0008	0,0010	0,0012	0,0014	0,0016	0,0018	0,0020	0,0022	0,0024	0,0026

Compressed air

			T_x = 10,1–15,0 x DC											
		Ø DC =	0,2 mm	0,3 mm	0,4–0,5 mm	0,6–0,7 mm	0,8–0,9 mm	1,0 mm	1,2–1,4 mm	1,5 mm	1,6–1,8 mm	2,0 mm	2,5 mm	3,0 mm
			a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC	a_e 0,05 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.14	114	0,50	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036
1.15	114	0,50	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036
1.16	114	0,50	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036
6.1	108	0,50	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036
6.2	72	0,50	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036
6.3	42	0,50	0,0002	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0024	0,0026	0,0029
6.4	30	0,50	0,0002	0,0004	0,0006	0,0008	0,0010	0,0012	0,0014	0,0016	0,0018	0,0020	0,0022	0,0024

Cutting data – Micro End Mills – 2.2xD

		Ø DC = 0,2 mm					Ø DC = 0,5 mm					Ø DC = 0,8 mm				
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,02	0,02	0,02	0,01	0,01	0,1	0,1	0,1	0,1	0,05	$a_{p\,max.}$	0,2	0,2	0,2	0,2	0,12
	$n_{min.}$	30.000					12.000					$n_{min.}$	8.000				
Index	n	v_f mm/min.					v_f mm/min.					n	v_f mm/min.				
1.1	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.2	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.3	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.4	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.5	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.6	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.7	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.8	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.9	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.10	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.11	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.12	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.13	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.14	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
1.15	50.000	232	202	174	144	116	274	238	205	170	137	50.000	485	422	364	301	242
1.16	50.000	201	175	151	125	101	237	206	178	147	119	50.000	420	365	315	260	210
2.1	50.000	232	202	174	144	116	219	191	164	136	110	38.000	346	301	260	215	173
2.2	50.000	232	202	174	144	116	219	191	164	136	110	38.000	346	301	260	215	173
2.3	50.000	232	202	174	144	116	219	191	164	136	110	38.000	346	301	260	215	173
2.4	50.000	232	202	174	144	116	219	191	164	136	110	32.000	346	301	260	215	173
2.5	50.000	232	202	174	144	116	219	191	164	136	110	38.000	346	301	260	215	173
2.6	50.000	232	202	174	144	116	219	191	164	136	110	38.000	346	301	260	215	173
2.7	50.000	232	202	174	144	116	219	191	164	136	110	25.000	312	271	234	193	156
3.1	50.000	232	202	174	144	116	219	191	164	136	110	50.000	485	422	364	301	242
3.2	50.000	232	202	174	144	116	219	191	164	136	110	50.000	485	422	364	301	242
3.3	50.000	232	202	174	144	116	219	191	164	136	110	50.000	485	422	364	301	242
3.4	50.000	232	202	174	144	116	219	191	164	136	110	50.000	485	422	364	301	242
3.5	50.000	141	123	106	88	71	175	152	131	109	88	32.000	285	248	213	176	142
3.6	50.000	141	123	106	88	71	175	152	131	109	88	32.000	285	248	213	176	142
3.7	50.000	141	123	106	88	71	175	152	131	109	88	32.000	285	248	213	176	142
3.8	50.000	141	123	106	88	71	175	152	131	109	88	32.000	285	248	213	176	142
4.1	50.000	232	202	174	144	116	274	238	205	170	137	50.000	582	506	436	361	291
4.2	50.000	232	202	174	144	116	274	238	205	170	137	50.000	582	506	436	361	291
4.3																	
4.4																	
4.5																	
4.6	50.000	232	202	174	144	116	274	238	205	170	137	50.000	582	506	436	361	291
4.7	50.000	232	202	174	144	116	274	238	205	170	137	44.000	485	422	364	301	242
4.8	50.000	126	110	95	78	63	134	117	101	83	67	25.000	170	148	127	105	85
4.9	50.000	126	110	95	78	63	107	93	80	67	54	19.000	147	128	110	91	74
4.10	50.000	126	110	95	78	63	112	97	84	69	56	19.000	158	138	119	98	79
4.11	50.000	232	202	174	144	116	274	238	205	170	137	44.000	485	422	364	301	242
4.12	50.000	232	202	174	144	116	274	238	205	170	137	44.000	485	422	364	301	242
4.13	50.000	232	202	174	144	116	274	238	205	170	137	50.000	582	506	436	361	291
4.14	50.000	232	202	174	144	116	274	238	205	170	137	50.000	582	506	436	361	291
4.15	50.000	212	185	159	132	106	200	174	150	124	100	38.000	316	275	237	196	158
4.16	50.000	212	185	159	132	106	250	218	188	155	125	50.000	531	462	398	329	266
4.17																	
4.18	50.000	141	123	106	88	71	150	131	113	93	75	31.000	221	193	166	137	111
4.19																	
5.1	50.000	72	62	54	44	36	89	77	66	55	44	25.000	102	89	76	63	51
5.2	50.000	72	62	54	44	36	89	77	66	55	44	25.000	102	89	76	63	51
5.3	50.000	72	62	54	44	36	89	77	66	55	44	25.000	91	79	68	56	45
5.4	50.000	54	47	41	34	27	66	57	49	41	33	12.000	78	68	59	49	39
5.5	50.000	54	47	41	34	27	66	57	49	41	33	12.000	78	68	59	49	39
5.6	50.000	63	54	47	39	31	76	66	57	47	38	19.000	91	79	68	56	45
5.7	50.000	46	40	35	29	23	55	48	41	34	27	19.000	69	60	51	43	34
5.8	50.000	46	40	35	29	23	55	48	41	34	27	19.000	78	68	59	49	39
5.9	50.000	114	99	85	71	57	164	143	123	102	82	44.000	114	99	85	71	57
5.10	50.000	114	99	85	71	57	164	143	123	102	82	44.000	164	143	123	102	82
5.11	50.000	70	61	53	43	35	85	74	64	53	42	38.000	101	88	76	63	51
6.1	50.000	219	191	164	136	110	232	202	174	144	116	50.000	388	338	291	241	194
6.2	50.000	201	175	151	125	101	285	248	213	176	142	38.000	336	292	252	208	168
6.3	50.000	114	99	85	71	57	134	117	101	83	67	25.000	156	136	117	97	78
6.4	50.000	107	93	80	67	54	126	110	95	78	63	25.000	141	123	106	88	71
6.5																	

		Ø DC = 1,0 mm						Ø DC = 1,5 mm						●	○
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6 –1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	1st choice	suitable	
	$a_{p\,max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\,max.}$	0,45	0,45	0,45	0,45	0,3			
	$n_{min.}$	6.500					$n_{min.}$	6.500							
Index	n	v_f mm/min.					n	v_f mm/min.					Emulsion	Compressed air	MMS
1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.3	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.4	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.5	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.6	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.7	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.8	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.9	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.10	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.11	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.12	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.13	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.14	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
1.15	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
1.16	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
2.1	38.000	589	512	442	365	294	25.000	850	740	638	527	425		●	○
2.2	38.000	589	512	442	365	294	25.000	850	740	638	527	425		●	○
2.3	38.000	589	512	442	365	294	25.000	850	740	638	527	425		●	○
2.4	32.000	496	431	372	307	248	21.000	760	661	570	471	380		●	○
2.5	38.000	589	512	442	365	294	25.000	850	740	638	527	425		●	○
2.6	38.000	589	512	442	365	294	25.000	850	740	638	527	425		●	○
2.7	25.000	465	404	349	288	232	16.000	640	557	480	397	320		●	○
3.1	50.000	775	674	581	480	387	38.000	1200	1044	900	744	600		●	○
3.2	50.000	775	674	581	480	387	38.000	1200	1044	900	744	600		●	○
3.3	50.000	775	674	581	480	387	38.000	1200	1044	900	744	600		●	○
3.4	50.000	775	674	581	480	387	38.000	1200	1044	900	744	600		●	○
3.5	32.000	389	338	292	241	194	21.000	548	477	411	340	274		●	○
3.6	32.000	389	338	292	241	194	21.000	548	477	411	340	274		●	○
3.7	32.000	389	338	292	241	194	21.000	548	477	411	340	274		●	○
3.8	32.000	389	338	292	241	194	21.000	548	477	411	340	274		●	○
4.1	50.000	930	809	697	576	465	50.000	1500	1305	1125	930	750		●	○
4.2	50.000	930	809	697	576	465	50.000	1500	1305	1125	930	750		●	○
4.3															
4.4															
4.5															
4.6	50.000	930	809	697	576	465	38.000	1400	1218	1050	868	700		●	○
4.7	44.000	775	674	581	480	387	29.000	1160	1009	870	719	580		●	○
4.8	25.000	266	231	199	165	133	16.000	392	341	294	243	196		●	○
4.9	19.000	202	176	152	125	101	12.000	286	249	214	177	143		●	○
4.10	19.000	202	176	152	125	101	12.000	286	249	214	177	143		●	○
4.11	44.000	775	674	581	480	387	29.000	1160	1009	870	719	580		●	○
4.12	44.000	775	674	581	480	387	29.000	1160	1009	870	719	580		●	○
4.13	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660		●	○
4.14	50.000	930	809	697	576	465	38.000	1520	1322	1140	942	760		●	○
4.15	38.000	495	431	371	307	247	25.000	685	596	513	424	342		●	○
4.16	50.000	849	738	636	526	424	38.000	1388	1207	1041	860	694		●	○
4.17															
4.18	31.000	354	308	265	219	177	21.000	529	461	397	328	265		●	○
4.19															
5.1	25.000	152	132	114	94	76	16.000	294	256	220	182	147		●	○
5.2	25.000	152	132	114	94	76	16.000	294	256	220	182	147		●	○
5.3	25.000	152	132	114	94	76	16.000	294	256	220	182	147		●	○
5.4	12.000	110	95	82	68	55	8.000	170	148	127	105	85		●	○
5.5	12.000	131	114	99	82	66	8.000	255	221	191	158	127		●	○
5.6	19.000	152	132	114	94	76	12.000	294	256	220	182	147		●	○
5.7	19.000	99	86	74	61	49	12.000	170	148	127	105	85		●	○
5.8	19.000	131	114	99	82	66	12.000	255	221	191	158	127		●	○
5.9	44.000	170	148	127	105	85	29.000	329	286	246	204	164		●	○
5.10	44.000	247	215	186	153	124	29.000	365	318	274	226	183		●	○
5.11	38.000	170	148	127	105	85	25.000	329	286	246	204	164		●	○
6.1	50.000	620	539	465	384	310	33.000	850	740	638	527	425		●	
6.2	38.000	537	467	402	333	268	25.000	779	678	585	483	390		●	
6.3	25.000	235	204	176	146	117	16.000	346	301	260	215	173		●	
6.4	25.000	221	193	166	137	111	16.000	327	284	245	202	163		●	
6.5															

Cutting data – Micro End Mills – 2.2xD

		Ø DC = 1,8 mm					Ø DC = 2,0 mm					●	○	
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	1st choice		suitable
	$a_{p\,max.}$	0,54	0,54	0,54	0,54	0,36	0,6	0,6	0,6	0,6	0,4	Emulsion	Compressed air	MMS
	$n_{min.}$	5.500					5.000							
Index	n	v_f mm/min.					n	v_f mm/min.						
1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.5	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.6	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.7	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.8	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.9	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.10	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.11	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.12	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.13	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.14	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.15	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
1.16	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
2.1	22.000	950	827	713	589	475	19.000	1140	990	855	700	570		●	○
2.2	22.000	950	827	713	589	475	19.000	1140	990	855	700	570		●	○
2.3	22.000	950	827	713	589	475	19.000	1140	990	855	700	570		●	○
2.4	18.000	800	696	600	496	400	15.000	840	730	630	520	420		●	○
2.5	22.000	950	827	713	589	475	19.000	1140	990	855	700	570		●	○
2.6	22.000	950	827	713	589	475	19.000	1140	990	855	700	570		●	○
2.7	14.000	680	592	510	422	340	12.000	720	620	540	450	360		●	○
3.1	32.000	1400	1218	1050	868	700	25.000	1500	1300	1125	930	750		●	○
3.2	32.000	1400	1218	1050	868	700	25.000	1500	1300	1125	930	750		●	○
3.3	32.000	1400	1218	1050	868	700	25.000	1500	1300	1125	930	750		●	○
3.4	32.000	1400	1218	1050	868	700	25.000	1500	1300	1125	930	750		●	○
3.5	18.000	630	548	473	391	315	25.000	1500	1300	1125	930	750		●	○
3.6	18.000	630	548	473	391	315	25.000	1500	1300	1125	930	750		●	○
3.7	18.000	630	548	473	391	315	25.000	1500	1300	1125	930	750		●	○
3.8	18.000	630	548	473	391	315	25.000	1500	1300	1125	930	750		●	○
4.1	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750		●	○
4.2	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750		●	○
4.3															
4.4															
4.5															
4.6	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750		●	○
4.7	25.000	1250	1088	938	775	625	25.000	1500	1300	1125	930	750		●	○
4.8	14.000	500	435	375	310	250	25.000	1500	1300	1125	930	750		●	○
4.9	10.000	370	322	278	229	185	19.000	1140	990	855	700	570		●	○
4.10	10.000	370	322	278	229	185	19.000	1140	990	855	700	570		●	○
4.11	25.000	1250	1088	938	775	625	19.000	1140	990	855	700	570		●	○
4.12	25.000	1250	1088	938	775	625	15.000	840	730	630	520	420		●	○
4.13	28.000	1400	1218	1050	868	700	19.000	1140	990	855	700	570		●	○
4.14	33.000	1560	1357	1170	967	780	19.000	1140	990	855	700	570		●	○
4.15	22.000	800	696	600	496	400	12.000	720	630	540	450	360		●	○
4.16	33.000	1560	1357	1170	967	780	25.000	1500	1300	1125	930	750		●	○
4.17															
4.18	29.000	300	261	225	186	150	25.000	1500	1300	1125	930	750		●	○
4.19															
5.1	14.000	400	348	300	248	200	25.000	1500	1300	1125	930	750		●	○
5.2	14.000	400	348	300	248	200	25.000	1500	1300	1125	930	750		●	○
5.3	14.000	420	365	315	260	210	25.000	1500	1300	1125	930	750		●	○
5.4	7.000	250	218	188	155	125	25.000	1500	1300	1125	930	750		●	○
5.5	7.000	370	322	278	229	185	25.000	1500	1300	1125	930	750		●	○
5.6	10.000	370	322	278	229	185	25.000	1500	1300	1125	930	750		●	○
5.7	10.000	280	244	210	174	140	25.000	1500	1300	1125	930	750		●	○
5.8	10.000	370	322	278	229	185	25.000	1500	1300	1125	930	750		●	○
5.9	25.000	400	348	300	248	200	25.000	1500	1300	1125	930	750		●	○
5.10	25.000	480	418	360	298	240	25.000	1500	1300	1125	930	750		●	○
5.11	22.000	380	331	285	236	190	25.000	1500	1300	1125	930	750		●	○
6.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
6.2	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
6.3	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
6.4	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
6.5															

Cutting data – Micro End Mills – 5xD

		Ø DC = 0,2 mm					Ø DC = 0,5 mm					Ø DC = 0,8 mm					● 1st choice		○ suitable	
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC				
	$a_{p\,max.}$	0,012	0,012	0,012	0,012	$a_{p\,max.}$	0,06	0,06	0,06	0,06	$a_{p\,max.}$	0,12	0,12	0,12	0,12	0,064				
	$n_{min.}$	30.000				$n_{min.}$	12.000				$n_{min.}$	8.000								
Index	n	v_f mm/min.				n	v_f mm/min.				n	v_f mm/min.					Emulsion	Compressed air	MMS	
1.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.3	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.4	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.5	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.6	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.7	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.8	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.9	50.000	232	202	174	144	50.000	274	238	205	170	31.000	381	332	286	236	191		●	○	
1.10	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.11	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.12	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.13	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.14	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
1.15	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○	
1.16	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○	
2.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173		●	○	
2.2	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173		●	○	
2.3	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173		●	○	
2.4	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173		●	○	
2.5	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173		●	○	
2.6	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173		●	○	
2.7	50.000	232	202	174	144	38.000	192	167	144	119	19.000	263	229	197	163	132		●	○	
3.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208		●	○	
3.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208		●	○	
3.3	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208		●	○	
3.4	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208		●	○	
3.5	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	○	
3.6	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	○	
3.7	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	○	
3.8	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	○	
4.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277		●	○	
4.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277		●	○	
4.3																				
4.4																				
4.5																				
4.6	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277		●	○	
4.7	50.000	232	202	174	144	50.000	274	238	205	170	38.000	554	482	416	344	277		●	○	
4.8	50.000	126	110	95	78	44.000	134	117	101	83	22.000	204	177	153	126	102		●	○	
4.9	50.000	126	110	95	78	31.000	112	97	84	69	15.000	170	148	127	105	85		●	○	
4.10	50.000	126	110	95	78	31.000	112	97	84	69	15.000	170	148	127	105	85		●	○	
4.11	50.000	232	202	174	144	50.000	274	238	205	170	38.000	485	422	364	301	242		●	○	
4.12	50.000	232	202	174	144	50.000	274	238	205	170	38.000	485	422	364	301	242		●	○	
4.13	50.000	232	202	174	144	50.000	274	238	205	170	44.000	554	482	416	344	277		●	○	
4.14	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277		●	○	
4.15	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158		●	○	
4.16	50.000	212	185	159	132	50.000	250	218	188	155	50.000	506	440	379	314	253		●	○	
4.17																				
4.18	50.000	141	123	106	88	50.000	150	131	113	93	25.000	253	220	190	157	126		●	○	
4.19																				
5.1	50.000	63	54	47	39	44.000	76	66	57	47	22.000	91	79	68	56	45		●	○	
5.2	50.000	63	54	47	39	44.000	76	66	57	47	22.000	91	79	68	56	45		●	○	
5.3	50.000	63	54	47	39	44.000	76	66	57	47	22.000	91	79	68	56	45		●	○	
5.4	50.000	46	40	35	29	25.000	55	48	41	34	12.000	88	77	66	55	44		●	○	
5.5	50.000	46	40	35	29	25.000	55	48	41	34	12.000	78	68	59	49	39		●	○	
5.6	50.000	54	47	40	33	31.000	63	55	47	39	15.000	91	79	68	56	45		●	○	
5.7	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49		●	○	
5.8	50.000	55	47	40	32	31.000	58	51	44	36	15.000	98	85	73	61	49		●	○	
5.9	50.000	60	61	48	41	50.000	71	62	53	44	38.000	114	99	85	71	57		●	○	
5.10	50.000	60	61	48	41	50.000	71	62	53	44	38.000	126	110	95	78	63		●	○	
5.11	50.000	60	52	45	37	50.000	71	62	49	39	31.000	89	77	66	55	44		●	○	
6.1	50.000	155	135	116	96	50.000	164	143	123	102	44.000	346	301	260	215	173		●		
6.2	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●		
6.3	50.000	95	83	71	59	44.000	134	117	101	83	22.000	180	157	135	112	90		●		
6.4	50.000	89	78	67	55	44.000	126	110	95	78	22.000	170	148	127	105	85		●		
6.5																				

a_e = 0.6–1.0 x DC: If values are missing, only trochoidal slot milling and profiling are permitted. Otherwise, there is the risk of tool breakage.

14

Cutting data – Micro End Mills – 5xD

		Ø DC = 1,0 mm					Ø DC = 1,5 mm					Ø DC = 1,8 mm				
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\,max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\,max.}$	0,54	0,54	0,54	0,54	0,36
	$n_{min.}$	6.500					$n_{min.}$	6.500					$n_{min.}$	5.500				
Index	n	v_f mm/min.					n	v_f mm/min.					n	v_f mm/min.				
1.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.3	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.4	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.5	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.6	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.7	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.8	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.9	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
1.10	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.11	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.12	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.13	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.14	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
1.15	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
1.16	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
2.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
2.2	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
2.3	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
2.4	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
2.5	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
2.6	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
2.7	19.000	310	270	232	192	155	12.000	480	418	360	298	240	10.000	500	435	375	310	250
3.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
3.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
3.3	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
3.4	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
3.5	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
3.6	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
3.7	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
3.8	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
4.1	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
4.2	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
4.3																		
4.4																		
4.5																		
4.6	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
4.7	38.000	705	613	529	437	352	25.000	1000	870	750	620	500	22.000	1080	940	810	670	540
4.8	22.000	278	242	209	173	139	14.000	343	298	257	213	171	12.000	450	392	338	279	225
4.9	15.000	190	165	142	118	95	10.000	245	213	184	152	122	8.000	300	261	225	186	150
4.10	15.000	190	165	142	118	95	10.000	245	213	184	152	122	8.000	300	261	225	186	150
4.11	38.000	697	607	523	432	349	25.000	1000	870	750	620	500	22.000	1100	957	825	682	550
4.12	38.000	697	607	523	432	349	25.000	1000	870	750	620	500	22.000	1100	957	825	682	550
4.13	44.000	813	708	610	504	407	29.000	1160	1009	870	719	580	25.000	1200	1044	900	744	600
4.14	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
4.15	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
4.16	50.000	849	738	636	526	424	33.000	1205	1048	904	747	602	28.000	1400	1218	1050	868	700
4.17																		
4.18	25.000	318	277	239	197	159	16.000	438	381	329	272	219	14.000	500	435	375	310	250
4.19																		
5.1	22.000	114	99	85	71	57	14.000	196	170	147	121	98	12.000	300	261	225	186	150
5.2	22.000	114	99	85	71	57	14.000	196	170	147	121	98	12.000	300	261	225	186	150
5.3	22.000	114	99	85	71	57	14.000	196	170	147	121	98	12.000	300	261	225	186	150
5.4	12.000	110	95	82	68	55	8.000	170	148	127	105	85	7.000	240	209	180	149	120
5.5	12.000	131	114	99	82	66	8.000	170	148	127	105	85	7.000	240	209	180	149	120
5.6	15.000	152	132	114	94	76	10.000	245	213	184	152	122	8.000	300	261	225	186	150
5.7	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
5.8	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
5.9	38.000	156	135	117	96	78	25.000	274	238	205	170	137	22.000	380	331	285	236	190
5.10	38.000	212	185	159	132	106	25.000	365	318	274	226	183	22.000	450	392	338	279	225
5.11	31.000	127	111	95	79	64	21.000	201	175	151	125	100	18.000	300	261	225	186	150
6.1	44.000	426	371	320	264	213	29.000	600	522	450	372	300	25.000	800	696	600	496	400
6.2	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
6.3	22.000	235	204	176	146	117	14.000	346	301	260	215	173	12.000	450	392	338	279	225
6.4	22.000	221	193	166	137	111	14.000	327	284	245	202	163	12.000	450	392	338	279	225
6.5																		

		Ø DC = 2,0 mm					●		○
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	1st choice		suitable
	$a_{p\,max.}$	0,6	0,6	0,6	0,6	0,4	Emulsion	Compressed air	MMS
	$n_{min.}$	5.000							
Index	n	v_f mm/min.							
1.1	22.000	1320	1148	990	818	660		●	○
1.2	22.000	1320	1148	990	818	660		●	○
1.3	22.000	1320	1148	990	818	660		●	○
1.4	22.000	1320	1148	990	818	660		●	○
1.5	22.000	1320	1148	990	818	660		●	○
1.6	15.000	900	783	675	558	450		●	○
1.7	22.000	1320	1148	990	818	660		●	○
1.8	15.000	900	783	675	558	450		●	○
1.9	15.000	900	783	675	558	450		●	○
1.10	15.000	900	783	675	558	450		●	○
1.11	15.000	900	783	675	558	450		●	○
1.12	15.000	900	783	675	558	450		●	○
1.13	15.000	900	783	675	558	450		●	○
1.14	15.000	900	783	675	558	450		●	○
1.15	22.000	1320	1148	990	818	660		●	○
1.16	15.000	900	783	675	558	450		●	○
2.1	15.000	900	783	675	558	450		●	○
2.2	15.000	900	783	675	558	450		●	○
2.3	15.000	900	783	675	558	450		●	○
2.4	15.000	900	783	675	558	450		●	○
2.5	15.000	900	783	675	558	450		●	○
2.6	15.000	900	783	675	558	450		●	○
2.7	9.000	540	470	405	335	270		●	○
3.1	25.000	1500	1305	1125	930	750		●	○
3.2	25.000	1500	1305	1125	930	750		●	○
3.3	25.000	1500	1305	1125	930	750		●	○
3.4	25.000	1500	1305	1125	930	750		●	○
3.5	12.000	520	452	390	322	260		●	○
3.6	12.000	520	452	390	322	260		●	○
3.7	12.000	520	452	390	322	260		●	○
3.8	12.000	520	452	390	322	260		●	○
4.1	31.000	1860	1618	1395	1153	930		●	○
4.2	31.000	1860	1618	1395	1153	930		●	○
4.3									
4.4									
4.5									
4.6	25.000	1500	1305	1125	930	750		●	○
4.7	19.000	1140	992	855	707	570		●	○
4.8	11.000	480	418	360	298	240		●	○
4.9	7.000	300	261	225	186	150		●	○
4.10	7.000	300	261	225	186	150		●	○
4.11	19.000	1140	992	855	707	570		●	○
4.12	19.000	1140	992	855	707	570		●	○
4.13	22.000	1320	1148	990	818	660		●	○
4.14	25.000	1500	1305	1125	930	750		●	○
4.15	15.000	660	574	495	409	330		●	○
4.16	25.000	1500	1305	1125	930	750		●	○
4.17									
4.18	12.000	520	452	390	322	260		●	○
4.19									
5.1	11.000	400	348	300	248	200		●	○
5.2	11.000	400	348	300	248	200		●	○
5.3	11.000	400	348	300	248	200		●	○
5.4	6.000	260	226	195	161	130		●	○
5.5	6.000	260	226	195	161	130		●	○
5.6	7.000	300	261	225	186	150		●	○
5.7	7.000	300	261	225	186	150		●	○
5.8	7.000	300	261	225	186	150		●	○
5.9	19.000	420	365	315	260	210		●	○
5.10	19.000	500	435	375	310	250		●	○
5.11	15.000	400	348	300	248	200		●	○
6.1	22.000	1000	870	750	620	500		●	
6.2	15.000	500	435	375	310	250		●	
6.3	11.000	480	418	360	298	240		●	
6.4	11.000	480	418	360	298	240		●	
6.5									

Cutting data – Micro end mills – 10xD

		Ø DC = 0,2 mm				Ø DC = 0,5 mm					Ø DC = 0,8 mm				Ø DC = 1,0 mm			
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC
	$a_{p\,max.}$	0,006	0,006	0,006	0,006	0,015	0,015	0,015	0,015	$a_{p\,max.}$	0,024	0,024	0,024	0,024	0,03	0,03	0,03	0,03
	$n_{min.}$	30.000				12.000				$n_{min.}$	8.000				6.500			
Index	n	v_f mm/min.				v_f mm/min.				n	v_f mm/min.				v_f mm/min.			
1.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
1.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
1.3	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
1.4	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
1.5	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
1.6	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
1.7	50.000	232	202	174	144	219	191	164	136	38.000	450	392	338	279	589	512	442	365
1.8	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
1.9	50.000	232	202	174	144	219	191	164	136	38.000	450	392	338	279	589	512	442	365
1.10	50.000	201	175	151	125	190	165	142	118	25.000	270	235	203	167	335	292	252	208
1.11	50.000	201	175	151	125	190	165	142	118	25.000	270	235	203	167	335	292	252	208
1.12	50.000	201	175	151	125	190	165	142	118	25.000	270	235	203	167	335	292	252	208
1.13	50.000	201	175	151	125	190	165	142	118	25.000	270	235	203	167	335	292	252	208
1.14	50.000	201	175	151	125	190	165	142	118	25.000	270	235	203	167	335	292	252	208
1.15	50.000	232	202	174	144	219	191	164	136	38.000	450	392	338	279	589	512	442	365
1.16	50.000	201	175	151	125	190	165	142	118	25.000	270	235	203	167	335	292	252	208
2.1	50.000	155	135	116	96	208	181	156	129	25.000	312	271	234	193	387	337	290	240
2.2	50.000	155	135	116	96	208	181	156	129	25.000	312	271	234	193	387	337	290	240
2.3	50.000	155	135	116	96	208	181	156	129	25.000	312	271	234	193	387	337	290	240
2.4	50.000	155	135	116	96	164	143	123	102	19.000	242	211	182	150	294	256	221	182
2.5	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
2.6	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
2.7	50.000	155	135	116	96	170	148	127	105	15.000	236	205	177	146	279	243	209	173
3.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
3.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
3.3	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
3.4	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
3.5	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
3.6	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
3.7	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
3.8	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
4.1	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
4.2	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
4.3																		
4.4																		
4.5																		
4.6	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
4.7	50.000	232	202	174	144	274	238	205	170	31.000	402	350	301	249	480	418	360	298
4.8	50.000	126	110	95	78	134	117	101	83	19.000	170	148	127	105	190	165	142	118
4.9	50.000	126	110	95	78	89	78	67	55	12.000	136	118	102	84	152	132	114	94
4.10	50.000	126	110	95	78	89	78	67	55	12.000	136	118	102	84	152	132	114	94
4.11	50.000	232	202	174	144	274	238	205	170	31.000	402	350	301	249	480	418	360	298
4.12	50.000	232	202	174	144	274	238	205	170	31.000	402	350	301	249	480	418	360	298
4.13	50.000	232	202	174	144	329	286	246	204	38.000	554	482	416	344	705	613	529	437
4.14	50.000	232	202	174	144	329	286	246	204	44.000	554	482	416	344	813	708	610	504
4.15	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
4.16	50.000	212	185	159	132	300	261	225	186	44.000	506	440	379	314	742	646	557	460
4.17																		
4.18	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	255	221	191	158
4.19																		
5.1	50.000	54	47	40	33	63	55	47	39	19.000	79	69	59	49	101	88	76	63
5.2	50.000	54	47	40	33	63	55	47	39	19.000	91	79	68	56	114	99	85	71
5.3	50.000	54	47	40	33	63	55	47	39	19.000	102	89	76	63	126	110	95	78
5.4	50.000	46	40	35	29	55	48	41	34	12.000	88	77	66	55	110	95	82	68
5.5	50.000	46	40	35	29	55	48	41	34	12.000	59	51	44	36	82	71	62	51
5.6	50.000	54	47	40	33	63	55	47	39	12.000	79	69	59	49	101	88	76	63
5.7	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
5.8	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
5.9	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	141	123	106	88
5.10	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	177	154	133	110
5.11	50.000	60	52	45	37	71	62	53	44	25.000	89	77	66	55	141	123	106	88
6.1	50.000	77	67	58	48	82	71	62	51	38.000	173	151	130	107	194	168	145	120
6.2	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
6.3	50.000	47	41	36	29	67	58	50	42	19.000	90	78	68	56	101	88	75	62
6.4	50.000	45	39	34	28	63	55	47	39	19.000	85	74	64	53	95	83	71	59
6.5																		

a_e= 0,6–1,0 x DC: Missing values only trochodial slotting and milling is recommended. Otherwise there is the risk of tool breakage.

		Ø DC = 1,5 mm					Ø DC = 1,8 mm					Ø DC = 2,0 mm				●	○	
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	1st choice	suitable	
	$a_{p\,max.}$	0,06	0,06	0,06	0,06	$a_{p\,max.}$	0,072	0,072	0,072	0,072	$a_{p\,max.}$	0,08	0,08	0,08	0,08	Emulsion	Compressed air	MMS
	$n_{min.}$	6.500				$n_{min.}$	5.500				$n_{min.}$	5.000						
Index	n	v_f mm/min.				n	v_f mm/min.				n	v_f mm/min.						
1.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.3	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.4	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.5	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.6	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.7	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.8	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.9	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.10	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.11	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.12	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.13	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.14	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
1.15	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
1.16	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
2.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446		●	○
2.2	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446		●	○
2.3	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446		●	○
2.4	12.000	400	348	300	248	10.000	450	392	338	279	9.000	540	470	405	335		●	○
2.5	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446		●	○
2.6	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446		●	○
2.7	10.000	380	331	285	236	8.000	400	348	300	248	7.000	420	365	315	260		●	○
3.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818		●	○
3.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818		●	○
3.3	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818		●	○
3.4	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818		●	○
3.5	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	○
3.6	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	○
3.7	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	○
3.8	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	○
4.1	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042		●	○
4.2	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042		●	○
4.3																		
4.4																		
4.5																		
4.6	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707		●	○
4.7	21.000	800	696	600	496	18.000	900	783	675	558	15.000	900	783	675	558		●	○
4.8	12.000	294	256	220	182	10.000	260	226	195	161	9.000	390	339	293	242		●	○
4.9	8.000	196	170	147	121	7.000	260	226	195	161	6.000	260	226	195	161		●	○
4.10	8.000	196	170	147	121	7.000	260	226	195	161	6.000	260	226	195	161		●	○
4.11	21.000	800	696	600	496	18.000	850	740	638	527	15.000	900	783	675	558		●	○
4.12	21.000	800	696	600	496	18.000	850	740	638	527	15.000	900	783	675	558		●	○
4.13	25.000	1000	870	750	620	18.000	1000	870	750	620	19.000	1140	992	855	707		●	○
4.14	29.000	1160	1009	870	719	25.000	1200	1044	900	744	22.000	1320	1148	990	818		●	○
4.15	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322		●	○
4.16	29.000	1059	921	794	657	25.000	1200	1044	900	744	22.000	1320	1148	990	818		●	○
4.17																		
4.18	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	○
4.19																		
5.1	12.000	163	142	122	101	10.000	300	261	225	186	9.000	380	331	285	236		●	○
5.2	12.000	204	178	153	127	10.000	300	261	225	186	9.000	380	331	285	236		●	○
5.3	12.000	204	178	153	127	10.000	300	261	225	186	9.000	350	305	263	217		●	○
5.4	8.000	177	154	133	110	7.000	300	261	225	186	6.000	350	305	263	217		●	○
5.5	8.000	106	92	80	66	7.000	200	174	150	124	6.000	220	191	165	136		●	○
5.6	8.000	147	128	110	91	7.000	220	191	165	136	6.000	250	218	188	155		●	○
5.7	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155		●	○
5.8	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155		●	○
5.9	21.000	228	199	171	141	18.000	300	261	225	186	15.000	380	331	285	236		●	○
5.10	21.000	274	238	205	170	18.000	400	348	300	248	15.000	450	392	338	279		●	○
5.11	16.000	237	206	178	147	14.000	300	261	225	186	12.000	380	331	285	236		●	○
6.1	25.000	300	261	225	186	21.000	400	348	300	248	19.000	500	435	375	310		●	
6.2	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
6.3	12.000	173	151	130	107	10.000	200	174	150	124	9.000	240	209	180	149		●	
6.4	12.000	163	142	122	101	10.000	200	174	150	124	9.000	240	209	180	149		●	
6.5																		

Cutting data standard values – MultiChange – PCR-UNI – 52 871 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	a_p max.	Feedrates for extra short and short holder											
					Ø DC	9,7–10,0	11,7–12,0	15,7–16,0	19,7–20,0	24,7–25,0	Ø DC	9,7–10,0	11,7–12,0	15,7–16,0	19,7–20,0	24,7–25,0
					a_e 0,25 x DC						a_e 1 x DC					
					v_c m/min	f_z mm					v_c m/min	f_z mm				
1.1	0,9	0,7*	0,6*	0,56xDC	445	0,050	0,058	0,072	0,084	0,094	220	0,025	0,029	0,036	0,042	0,047
1.2	0,9	0,7*	0,6*	0,56xDC	445	0,050	0,058	0,072	0,084	0,094	220	0,025	0,029	0,036	0,042	0,047
1.3	0,9	0,7*	0,6*	0,56xDC	445	0,050	0,058	0,072	0,084	0,094	220	0,025	0,029	0,036	0,042	0,047
1.4	0,9	0,7*	0,6*	0,56xDC	405	0,050	0,058	0,072	0,084	0,094	200	0,025	0,029	0,036	0,042	0,047
1.5	0,9	0,7*	0,6*	0,56xDC	445	0,050	0,058	0,072	0,084	0,094	220	0,025	0,029	0,036	0,042	0,047
1.6	0,9	0,7*	0,6*	0,56xDC	365	0,047	0,054	0,068	0,078	0,087	180	0,023	0,027	0,034	0,039	0,044
1.7	0,9	0,7*	0,6*	0,56xDC	405	0,050	0,058	0,072	0,084	0,094	200	0,025	0,029	0,036	0,042	0,047
1.8	0,9	0,7*	0,6*	0,56xDC	285	0,042	0,048	0,060	0,070	0,078	140	0,021	0,024	0,030	0,035	0,039
1.9	0,9	0,7*	0,6*	0,56xDC	270	0,048	0,056	0,070	0,081	0,090	135	0,024	0,028	0,035	0,041	0,045
1.10	0,9	0,7*	0,6*	0,56xDC	405	0,050	0,058	0,072	0,084	0,094	200	0,025	0,029	0,036	0,042	0,047
1.11	0,9	0,7*	0,6*	0,56xDC	285	0,042	0,048	0,060	0,070	0,078	140	0,021	0,024	0,030	0,035	0,039
1.12	0,9	0,7*	0,6*	0,56xDC	265	0,048	0,055	0,069	0,080	0,089	130	0,024	0,028	0,034	0,040	0,044
1.13	0,9	0,7*	0,6*	0,56xDC	225	0,043	0,050	0,063	0,073	0,081	110	0,022	0,025	0,031	0,036	0,041
1.14	0,9	0,7*	0,6*	0,56xDC	225	0,043	0,050	0,063	0,073	0,081	110	0,022	0,025	0,031	0,036	0,041
1.15	0,9	0,7*	0,6*	0,56xDC	225	0,043	0,050	0,063	0,073	0,081	110	0,022	0,025	0,031	0,036	0,041
1.16	0,9	0,7*	0,6*	0,56xDC	265	0,048	0,055	0,069	0,080	0,089	130	0,024	0,028	0,034	0,040	0,044
2.1	0,9	0,7*	0,6*	0,56xDC	120	0,029	0,034	0,042	0,049	0,055	60	0,015	0,017	0,021	0,024	0,027
2.2	0,9	0,7*	0,6*	0,56xDC	135	0,032	0,037	0,046	0,053	0,059	65	0,016	0,018	0,023	0,027	0,030
2.3	0,9	0,7*	0,6*	0,56xDC	135	0,032	0,037	0,046	0,053	0,059	65	0,016	0,018	0,023	0,027	0,030
2.4	0,9	0,7*	0,6*	0,56xDC	135	0,032	0,037	0,046	0,053	0,059	65	0,016	0,018	0,023	0,027	0,030
2.5	0,9	0,7*	0,6*	0,56xDC	115	0,024	0,028	0,035	0,041	0,045	55	0,012	0,014	0,017	0,020	0,023
2.6	0,9	0,7*	0,6*	0,56xDC	120	0,029	0,034	0,042	0,049	0,055	60	0,015	0,017	0,021	0,024	0,027
2.7	0,9	0,7*	0,6*	0,56xDC	120	0,025	0,029	0,036	0,042	0,047	60	0,013	0,015	0,018	0,021	0,023
3.1	0,9	0,7*	0,6*	0,56xDC	485	0,083	0,097	0,121	0,140	0,156	240	0,042	0,048	0,060	0,070	0,078
3.2	0,9	0,7*	0,6*	0,56xDC	365	0,058	0,068	0,084	0,098	0,109	180	0,029	0,034	0,042	0,049	0,055
3.3	0,9	0,7*	0,6*	0,56xDC	445	0,071	0,082	0,103	0,119	0,132	220	0,035	0,041	0,051	0,059	0,066
3.4	0,9	0,7*	0,6*	0,56xDC	365	0,058	0,068	0,084	0,098	0,109	180	0,029	0,034	0,042	0,049	0,055
3.5	0,9	0,7*	0,6*	0,56xDC	325	0,058	0,068	0,084	0,098	0,109	160	0,029	0,034	0,042	0,049	0,055
3.6	0,9	0,7*	0,6*	0,56xDC	305	0,050	0,058	0,072	0,084	0,094	150	0,025	0,029	0,036	0,042	0,047
3.7	0,9	0,7*	0,6*	0,56xDC	325	0,058	0,068	0,084	0,098	0,109	160	0,029	0,034	0,042	0,049	0,055
3.8	0,9	0,7*	0,6*	0,56xDC	305	0,050	0,058	0,072	0,084	0,094	150	0,025	0,029	0,036	0,042	0,047

* = Trimming and trochoidal slot milling

Cutting data standard values – MultiChange – PCR-ALU – 52 872 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	a_p max.	Feedrates for extra short and short holder											
					Ø DC	9,7–10,0	11,7–12,0	15,7–16,0	19,7–20,0	24,7–25,0	Ø DC	9,7–10,0	11,7–12,0	15,7–16,0	19,7–20,0	24,7–25,0
					a_e 0,25 x DC						a_e 1 x DC					
					v_c m/min	f_z mm					v_c m/min	f_z mm				
4.1	0,9	0,7*	0,6*	0,56xDC	1085	0,142	0,169	0,211	0,245	0,273	605	0,071	0,085	0,106	0,122	0,136
4.2	0,9	0,7*	0,6*	0,56xDC	1085	0,142	0,169	0,211	0,245	0,273	605	0,071	0,085	0,106	0,122	0,136
4.3	0,9	0,7*	0,6*	0,56xDC	720	0,149	0,178	0,222	0,257	0,286	405	0,075	0,089	0,106	0,128	0,143
4.4	0,9	0,7*	0,6*	0,56xDC	575	0,156	0,186	0,232	0,269	0,300	320	0,078	0,093	0,116	0,135	0,150
4.5	0,9	0,7*	0,6*	0,56xDC	415	0,171	0,203	0,253	0,294	0,327	230	0,085	0,102	0,127	0,147	0,164
4.6	0,9	0,7*	0,6*	0,56xDC	415	0,114	0,136	0,169	0,196	0,218	230	0,057	0,068	0,084	0,098	0,109
4.7	0,9	0,7*	0,6*	0,56xDC	520	0,071	0,085	0,106	0,122	0,136	290	0,036	0,042	0,053	0,061	0,068
4.8	0,9	0,7*	0,6*	0,56xDC	310	0,114	0,136	0,169	0,196	0,218	175	0,057	0,068	0,084	0,098	0,109
4.9	0,9	0,7*	0,6*	0,56xDC	520	0,071	0,085	0,106	0,122	0,136	290	0,036	0,042	0,053	0,061	0,068
4.10	0,9	0,7*	0,6*	0,56xDC	520	0,071	0,085	0,106	0,122	0,136	290	0,036	0,042	0,053	0,061	0,068
4.11	0,9	0,7*	0,6*	0,56xDC	520	0,071	0,085	0,106	0,122	0,136	290	0,036	0,042	0,053	0,061	0,068
4.12	0,9	0,7*	0,6*	0,56xDC	520	0,071	0,085	0,106	0,122	0,136	290	0,036	0,042	0,053	0,061	0,068
4.13																
4.14																
4.15																
4.16																
4.17																
4.18																
4.19																

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

		Ramping	Drilling	Helical milling			● 1st choice		○ suitable
					Max. plunging angle				
	v_c m/min	Max. angle	f_z factor	$\alpha_{R\,max.}$**	$D_{min.}$ 1,5	$D_{max.}$ 1,8	Emulsion	Compressed air	MMS
	1.1	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.2	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.3	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.4	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.5	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.6	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.7	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.8	**45°**	**0,7**	**0,56xDC**	**20°**	**13°**	●		○
	1.9	**30°**		**0,5xDC**	**18°**	**11°**	●		○
	1.10	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	1.11	**45°**	**0,7**	**0,56xDC**	**20°**	**13°**	●		○
	1.12	**30°**	**0,8**	**0,5xDC**	**18°**	**11°**	○	●	○
	1.13	**30°**	**0,7**	**0,5xDC**	**18°**	**11°**	●		○
	1.14	**30°**	**0,7**	**0,5xDC**	**18°**	**11°**	●		○
	1.15	**30°**	**0,7**	**0,5xDC**	**18°**	**11°**	●		○
	1.16	**30°**	**0,8**	**0,5xDC**	**18°**	**11°**	○	●	○
	2.1	15°		0,4xDC	14°	9°	●		○
	2.2	15°		0,4xDC	14°	9°	●		○
	2.3	15°		0,4xDC	14°	9°	●		○
	2.4	15°		0,4xDC	14°	9°	●		○
	2.5	15°		0,4xDC	14°	9°	●		
	2.6	15°		0,4xDC	14°	9°	●		○
	2.7	15°		0,4xDC	14°	9°	●		
	3.1	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.2	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.3	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.4	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.5	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.6	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.7	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○
	3.8	**45°**	**0,8**	**0,56xDC**	**20°**	**13°**	○	●	○

		Ramping	Drilling	Helical milling			● 1st choice		○ suitable
					Max. plunging angle				
	v_c m/min	Max. angle	f_z factor	$\alpha_{R\,max.}$**	$D_{min.}$ 1,5	$D_{max.}$ 1,8	Emulsion	Compressed air	MMS
	4.1	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.2	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.3	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.4	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.5	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.6	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.7	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.8	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.9	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.10	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.11	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.12	**45°**	**0,9**	**0,56xDC**	**20°**	**13°**	●		○
	4.13								
	4.14								
	4.15								
	4.16								
	4.17								
	4.18								
	4.19								

14

** Width of cut per helical revolution

Cutting data standard values – MultiChange – PCD milling heads

Index	Correction factor v_c, a_p and f_z Medium Holder	Correction factor v_c, a_p and f_z Long Holder	Correction factor v_c, a_p and f_z Extra Long Holder	$n_{max.}$ rpm	v_c m/min	Feedrates for extra short and short holder Ø DC = 8 mm a_e 0,1–0,4 x DC, a_p max. 6 mm, f_z in mm	Ø DC = 8 mm a_e 0,6–1,0 x DC, a_p max. 3 mm, f_z in mm	v_c m/min	Ø DC = 10 mm a_e 0,1–0,4 x DC, a_p max. 8 mm, f_z in mm	Ø DC = 10 mm a_e 0,6–1,0 x DC, a_p max. 4 mm, f_z in mm	● 1st choice Emulsion	○ suitable Compressed air	○ suitable MMS
4.1	0,9	0,7*	0,6*	**18000**	**300–450**	0,08	0,08	**350–550**	0,08	0,08	●	○	○
4.2	0,9	0,7*	0,6*		**300–450**	0,08	0,08	**350–550**	0,08	0,08	●	○	○
4.3	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.4	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.5	0,9	0,7*	0,6*		**300–450**	0,20	0,10	**350–550**	0,20	0,10	●	○	○
4.6	0,9	0,7*	0,6*		**300–450**	0,24	0,12	**350–550**	0,24	0,12	●	○	○
4.7	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.8	0,9	0,7*	0,6*		**300–450**	0,24	0,12	**350–550**	0,24	0,12	●	○	○
4.9	0,9	0,7*	0,6*		**300–450**	0,24	0,12	**350–550**	0,24	0,12	●	○	○
4.10	0,9	0,7*	0,6*		**300–450**	0,24	0,12	**350–550**	0,24	0,12	●	○	○
4.11	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.12	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.13	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.14	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.15	0,9	0,7*	0,6*		**300–450**	0,16	0,08	**350–550**	0,16	0,08	●	○	○
4.16	0,9	0,7*	0,6*		**300–450**	0,20	0,12	**350–550**	0,20	0,12	●	○	○
4.17	0,9	0,7*	0,6*		**300–450**	0,20	0,12	**350–550**	0,20	0,12	●	○	○
4.18	0,9	0,7*	0,6*		**300–450**	0,20	0,12	**350–550**	0,20	0,12	●	○	○
4.19	0,9	0,7*	0,6*		**300–450**	0,20	0,12	**350–550**	0,20	0,12	●	○	○

*= Edge Milling and Trochoidal Milling

Index	Correction factor v_c, a_p and f_z Medium Holder	Correction factor v_c, a_p and f_z Long Holder	Correction factor v_c, a_p and f_z Extra Long Holder	$n_{max.}$ rpm	v_c m/min	Feedrates for extra short and short holder Ø DC = 12 mm a_e 0,1–0,4 x DC, a_p max. 8 mm, f_z in mm	Ø DC = 12 mm a_e 0,6–1,0 x DC, a_p max. 4 mm, f_z in mm	v_c m/min	Ø DC = 16 mm a_e 0,1–0,4 x DC, a_p max. 8 mm, f_z in mm	Ø DC = 16 mm a_e 0,6–1,0 x DC, a_p max. 4 mm, f_z in mm	● 1st choice Emulsion	○ suitable Compressed air	○ suitable MMS
4.1	0,9	0,7*	0,6*	**18000**	**400–600**	0,08	0,08	**450–700**	0,08	0,08	●	○	○
4.2	0,9	0,7*	0,6*		**400–600**	0,08	0,08	**450–700**	0,08	0,08	●	○	○
4.3	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.4	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.5	0,9	0,7*	0,6*		**400–600**	0,20	0,10	**450–700**	0,20	0,10	●	○	○
4.6	0,9	0,7*	0,6*		**400–600**	0,24	0,12	**450–700**	0,24	0,12	●	○	○
4.7	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.8	0,9	0,7*	0,6*		**400–600**	0,24	0,12	**450–700**	0,24	0,12	●	○	○
4.9	0,9	0,7*	0,6*		**400–600**	0,24	0,12	**450–700**	0,24	0,12	●	○	○
4.10	0,9	0,7*	0,6*		**400–600**	0,24	0,12	**450–700**	0,24	0,12	●	○	○
4.11	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.12	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.13	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.14	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.15	0,9	0,7*	0,6*		**400–600**	0,16	0,08	**450–700**	0,16	0,08	●	○	○
4.16	0,9	0,7*	0,6*		**400–600**	0,20	0,12	**450–700**	0,20	0,12	●	○	○
4.17	0,9	0,7*	0,6*		**400–600**	0,20	0,12	**450–700**	0,20	0,12	●	○	○
4.18	0,9	0,7*	0,6*		**400–600**	0,20	0,12	**450–700**	0,20	0,12	●	○	○
4.19	0,9	0,7*	0,6*		**400–600**	0,20	0,12	**450–700**	0,20	0,12	●	○	○

*= Edge Milling and Trochoidal Milling

All tools should be mounted using torque wrench.
In unstable applications, the machining parameters can be reduced.

Cutting data standard values – MultiChange – End milling heads – 52 860 ... / 52 861 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c m/min	Feedrates for extra short and short holder															● 1st choice		○ suitable
				$a_{p\,max.}$	Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm					
					5,2 mm	4,4 mm	3,6 mm	6,5 mm	5,5 mm	4,5 mm	7,8 mm	6,6 mm	5,4 mm	10,4 mm	8,8 mm	7,2 mm	13 mm	11 mm	9 mm			
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
					f_z mm																	
1.1	**0,9**	**0,7***	**0,6***	**180**	0,05	0,04	0,03	0,07	0,06	0,04	0,08	0,07	0,05	0,11	0,09	0,07	0,14	0,12	0,08	○	●	○
1.2	**0,9**	**0,7***	**0,6***	**200**	0,06	0,05	0,03	0,08	0,07	0,05	0,09	0,08	0,06	0,13	0,11	0,08	0,16	0,14	0,10	○	●	○
1.3	**0,9**	**0,7***	**0,6***	**180**	0,05	0,04	0,03	0,07	0,06	0,04	0,08	0,07	0,05	0,11	0,09	0,07	0,14	0,12	0,08	○	●	○
1.4	**0,9**	**0,7***	**0,6***	**150**	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,04	0,10	0,08	0,06	0,13	0,11	0,08	○	●	○
1.5	**0,9**	**0,7***	**0,6***	**160**	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,12	0,10	0,07	0,15	0,13	0,09	○	●	○
1.6	**0,9**	**0,7***	**0,6***	**140**	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,04	0,10	0,08	0,06	0,13	0,11	0,08	○	●	○
1.7	**0,9**	**0,7***	**0,6***	**140**	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,12	0,10	0,07	0,15	0,13	0,09	○	●	○
1.8	**0,9**	**0,7***	**0,6***	**100**	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,08	0,07	0,05	0,10	0,09	0,06	○	●	○
1.9	**0,9**	**0,7***	**0,6***	**140**	0,05	0,04	0,03	0,07	0,06	0,04	0,08	0,07	0,05	0,11	0,09	0,07	0,14	0,12	0,08	○	●	○
1.10	**0,9**	**0,7***	**0,6***	**120**	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,08	0,07	0,05	0,10	0,09	0,06	○	●	○
1.11	**0,9**	**0,7***	**0,6***	**100**	0,03	0,03	0,02	0,04	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04	0,09	0,08	0,06	○	●	○
1.12	**0,9**	**0,7***	**0,6***	**90**	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,08	0,07	0,05	0,10	0,09	0,06	○	●	○
1.13	**0,9**	**0,7***	**0,6***	**70**	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,08	0,07	0,05	0,10	0,09	0,06	○	●	○
1.14																						
1.15	**0,9**	**0,7***	**0,6***	**80**	0,03	0,03	0,02	0,04	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04	0,09	0,08	0,06	○	●	○
1.16	**0,9**	**0,7***	**0,6***	**80**	0,03	0,03	0,02	0,04	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04	0,09	0,08	0,06	○	●	○
2.1	0,9	0,7*	0,6*	60	0,04	0,04		0,06	0,05		0,07	0,06		0,09	0,08		0,12	0,10		●		
2.2	0,9	0,7*	0,6*	60	0,04	0,03		0,05	0,04		0,06	0,05		0,08	0,07		0,10	0,09		●		
2.3	0,9	0,7*	0,6*	50	0,04	0,03		0,05	0,04		0,06	0,05		0,08	0,07		0,10	0,09		●		
2.4	0,9	0,7*	0,6*	40	0,03	0,02		0,04	0,03		0,04	0,04		0,06	0,05		0,08	0,07		●		
2.5	0,9	0,7*	0,6*	50	0,03	0,03		0,04	0,04		0,05	0,04		0,07	0,06		0,09	0,08		●		
2.6	0,9	0,7*	0,6*	50	0,03	0,03		0,04	0,04		0,05	0,04		0,07	0,06		0,09	0,08		●		
2.7	0,9	0,7*	0,6*	40	0,03	0,02		0,04	0,03		0,04	0,04		0,06	0,05		0,08	0,07		●		
3.1	**0,9**	**0,7***	**0,6***	**150**	0,06	0,05	0,03	0,08	0,07	0,05	0,09	0,08	0,06	0,13	0,11	0,08	0,16	0,14	0,10		●	
3.2	**0,9**	**0,7***	**0,6***	**120**	0,05	0,04	0,03	0,07	0,06	0,04	0,08	0,07	0,05	0,11	0,09	0,07	0,14	0,12	0,08		●	
3.3	**0,9**	**0,7***	**0,6***	**140**	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,12	0,10	0,07	0,15	0,13	0,09		●	
3.4	**0,9**	**0,7***	**0,6***	**120**	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,04	0,10	0,08	0,06	0,13	0,11	0,08		●	
3.5	**0,9**	**0,7***	**0,6***	**120**	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,12	0,10	0,07	0,15	0,13	0,09		●	
3.6	**0,9**	**0,7***	**0,6***	**100**	0,05	0,04	0,03	0,07	0,06	0,04	0,08	0,07	0,05	0,11	0,09	0,07	0,14	0,12	0,08		●	
3.7	**0,9**	**0,7***	**0,6***	**120**	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,12	0,10	0,07	0,15	0,13	0,09		●	
3.8	**0,9**	**0,7***	**0,6***	**100**	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,04	0,10	0,08	0,06	0,13	0,11	0,08		●	
4.1																						
4.2																						
4.3																						
4.4																						
4.5																						
4.6																						
4.7																						
4.8																						
4.9																						
4.10	0,9	0,7*	0,6*	160	0,03	0,03	0,02	0,04	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04	0,09	0,08	0,06	●		○
4.11	0,9	0,7*	0,6*	220	0,06	0,05	0,03	0,08	0,07	0,05	0,09	0,08	0,06	0,13	0,11	0,08	0,16	0,14	0,10	●		○
4.12																						
4.13																						
4.14																						
4.15																						
4.16																						
4.17																						
4.18																						
4.19																						
5.1																						
5.2																						
5.3																						
5.4																						
5.5																						
5.6																						
5.7																						
5.8																						
5.9																						
5.10																						
5.11																						
6.1																						
6.2																						
6.3																						
6.4																						
6.5																						

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting Data – MultiChange – Roughing finishing milling heads – 52 862 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c m/min	Feedrates for extra short and short holder										Emulsion	Compressed air	MMS
					Ø DC = 8 mm		Ø DC = 10 mm		Ø DC = 12 mm		Ø DC = 16 mm		Ø DC = 20 mm		● 1st choice		○ suitable
				$a_{p\,max.}$	7,5 mm		9,4 mm		11,3 mm		15,0 mm		18,8 mm				
					a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC			
					f_z mm		f_z mm		f_z mm		f_z mm		f_z mm				
1.1	0,9	0,7*	0,6*	215	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,07	0,10	0,08	○	●	○
1.2	0,9	0,7*	0,6*	240	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08	0,12	0,10	○	●	○
1.3	0,9	0,7*	0,6*	215	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,07	0,10	0,08	○	●	○
1.4	0,9	0,7*	0,6*	180	0,03	0,03	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08	○	●	○
1.5	0,9	0,7*	0,6*	190	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,07	0,10	0,09	○	●	○
1.6	0,9	0,7*	0,6*	170	0,03	0,03	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08	○	●	○
1.7	0,9	0,7*	0,6*	170	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,07	0,10	0,09	○	●	○
1.8	0,9	0,7*	0,6*	120	0,03	0,02	0,04	0,03	0,04	0,04	0,06	0,05	0,07	0,06	○	●	○
1.9	0,9	0,7*	0,6*	170	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,07	0,10	0,08	○	●	○
1.10	0,9	0,7*	0,6*	145	0,03	0,02	0,04	0,03	0,04	0,04	0,06	0,05	0,07	0,06	○	●	○
1.11	0,9	0,7*	0,6*	120	0,03	0,02	0,03	0,03	0,04	0,03	0,05	0,04	0,06	0,05	○	●	○
1.12	0,9	0,7*	0,6*	110	0,03	0,02	0,04	0,03	0,04	0,04	0,06	0,05	0,07	0,06	○	●	○
1.13	0,9	0,7*	0,6*	85	0,03	0,02	0,04	0,03	0,04	0,04	0,06	0,05	0,07	0,06	○	●	○
1.14																	
1.15	0,9	0,7*	0,6*	95	0,03	0,02	0,03	0,03	0,04	0,03	0,05	0,04	0,06	0,05	○	●	○
1.16	0,9	0,7*	0,6*	95	0,03	0,02	0,03	0,03	0,04	0,03	0,05	0,04	0,06	0,05	○	●	○
2.1	0,9	0,7*	0,6*	70	0,03	0,03	0,04	0,04	0,05	0,04	0,07	0,06	0,08	0,07	●		
2.2	0,9	0,7*	0,6*	70	0,03	0,02	0,04	0,03	0,04	0,04	0,06	0,05	0,07	0,06	●		
2.3	0,9	0,7*	0,6*	60	0,03	0,02	0,04	0,03	0,04	0,04	0,06	0,05	0,07	0,06	●		
2.4	0,9	0,7*	0,6*	50	0,02	0,02	0,03	0,02	0,03	0,03	0,04	0,04	0,06	0,05	●		
2.5	0,9	0,7*	0,6*	60	0,03	0,02	0,03	0,03	0,04	0,03	0,05	0,04	0,06	0,05	●		
2.6	0,9	0,7*	0,6*	60	0,03	0,02	0,03	0,03	0,04	0,03	0,05	0,04	0,06	0,05	●		
2.7	0,9	0,7*	0,6*	50	0,02	0,02	0,03	0,02	0,03	0,03	0,04	0,04	0,06	0,05	●		
3.1	0,9	0,7*	0,6*	180	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08	0,12	0,10		●	
3.2	0,9	0,7*	0,6*	140	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,07	0,10	0,08		●	
3.3	0,9	0,7*	0,6*	170	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,07	0,10	0,09		●	
3.4	0,9	0,7*	0,6*	140	0,03	0,03	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08		●	
3.5	0,9	0,7*	0,6*	140	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,07	0,10	0,09		●	
3.6	0,9	0,7*	0,6*	120	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,07	0,10	0,08		●	
3.7	0,9	0,7*	0,6*	140	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,07	0,10	0,09		●	
3.8	0,9	0,7*	0,6*	120	0,03	0,03	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08		●	
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6																	
4.7																	
4.8																	
4.9																	
4.10	0,9	0,7*	0,6*	190	0,03	0,02	0,03	0,03	0,04	0,03	0,05	0,04	0,06	0,05	●		○
4.11	0,9	0,7*	0,6*	260	0,04	0,04	0,06	0,05	0,07	0,06	0,09	0,08	0,12	0,10	●		○
4.12																	
4.13																	
4.14																	
4.15																	
4.16																	
4.17																	
4.18																	
4.19																	
5.1																	
5.2																	
5.3																	
5.4																	
5.5																	
5.6																	
5.7																	
5.8																	
5.9																	
5.10																	
5.11																	
6.1																	
6.2																	
6.3																	
6.4																	
6.5																	

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – HFC milling heads – 52 864 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c m/min	$a_{p\,max.}$ x DCX	Feedrates for extra short and short holder															● 1st choice	○ suitable	
						Ø DCX = 8 mm			Ø DCX = 10 mm			Ø DCX = 12 mm			Ø DCX = 16 mm			Ø DCX = 20 mm					
						a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	a_e 0,1–0,2 x DCX	a_e 0,3–0,4 x DCX	a_e 0,6–1,0 x DCX	Emulsion	Compressed air	MMS
						f_z mm																	
1.1	0,9	0,7*	0,6*	200	0,05	0,36	0,30	0,21	0,54	0,45	0,32	0,60	0,50	0,35	0,84	0,70	0,49	1,08	0,90	0,63	○	●	○
1.2	0,9	0,7*	0,6*	220	0,05	0,43	0,36	0,25	0,64	0,53	0,37	0,71	0,59	0,42	0,99	0,83	0,58	1,28	1,07	0,75	○	●	○
1.3	0,9	0,7*	0,6*	200	0,05	0,36	0,30	0,21	0,54	0,45	0,32	0,60	0,50	0,35	0,84	0,70	0,49	1,08	0,90	0,63	○	●	○
1.4	0,9	0,7*	0,6*	170	0,05	0,33	0,28	0,20	0,49	0,41	0,29	0,55	0,46	0,32	0,76	0,64	0,45	0,99	0,82	0,58	○	●	○
1.5	0,9	0,7*	0,6*	180	0,05	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69	○	●	○
1.6	0,9	0,7*	0,6*	150	0,05	0,33	0,28	0,20	0,49	0,41	0,29	0,55	0,46	0,32	0,76	0,64	0,45	0,99	0,82	0,58	○	●	○
1.7	0,9	0,7*	0,6*	150	0,05	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69	○	●	○
1.8	0,9	0,7*	0,6*	110	0,05	0,27	0,22	0,16	0,39	0,33	0,23	0,44	0,37	0,26	0,61	0,51	0,36	0,79	0,66	0,46	○	●	○
1.9	0,9	0,7*	0,6*	150	0,05	0,36	0,30	0,21	0,54	0,45	0,32	0,60	0,50	0,35	0,84	0,70	0,49	1,08	0,90	0,63	○	●	○
1.10	0,9	0,7*	0,6*	130	0,05	0,27	0,22	0,16	0,39	0,33	0,23	0,44	0,37	0,26	0,61	0,51	0,36	0,79	0,66	0,46	○	●	○
1.11	0,9	0,7*	0,6*	110	0,05	0,23	0,19	0,14	0,34	0,29	0,20	0,39	0,32	0,23	0,54	0,45	0,31	0,69	0,58	0,41	○	●	○
1.12	0,9	0,7*	0,6*	100	0,05	0,27	0,22	0,16	0,39	0,33	0,23	0,44	0,37	0,26	0,61	0,51	0,36	0,79	0,66	0,46	○	●	○
1.13	0,9	0,7*	0,6*	80	0,05	0,27	0,22	0,16	0,39	0,33	0,23	0,44	0,37	0,26	0,61	0,51	0,36	0,79	0,66	0,46	○	●	○
1.14																							
1.15	0,9	0,7*	0,6*	90	0,05	0,23	0,19	0,14	0,34	0,29	0,20	0,39	0,32	0,23	0,54	0,45	0,31	0,69	0,58	0,41	○	●	○
1.16	0,9	0,7*	0,6*	90	0,05	0,23	0,19	0,14	0,34	0,29	0,20	0,39	0,32	0,23	0,54	0,45	0,31	0,69	0,58	0,41	○	●	○
2.1	0,9	0,7*	0,6*	70	0,025	0,45	0,37	0,26	0,66	0,55	0,39	0,74	0,62	0,43	1,03	0,86	0,60	1,33	1,11	0,78	●		
2.2	0,9	0,7*	0,6*	70	0,025	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69	●		
2.3	0,9	0,7*	0,6*	60	0,025	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69	●		
2.4	0,9	0,7*	0,6*	40	0,025	0,30	0,25	0,17	0,45	0,37	0,26	0,49	0,41	0,29	0,69	0,58	0,41	0,88	0,74	0,52	●		
2.5	0,9	0,7*	0,6*	60	0,025	0,34	0,29	0,20	0,52	0,43	0,30	0,57	0,48	0,34	0,81	0,67	0,47	1,03	0,86	0,60	●		
2.6	0,9	0,7*	0,6*	55	0,025	0,34	0,29	0,20	0,52	0,43	0,30	0,57	0,48	0,34	0,81	0,67	0,47	1,03	0,86	0,60	●		
2.7	0,9	0,7*	0,6*	40	0,025	0,30	0,25	0,17	0,45	0,37	0,26	0,49	0,41	0,29	0,69	0,58	0,41	0,88	0,74	0,52	●		
3.1	0,9	0,7*	0,6*	170	0,05	0,43	0,36	0,25	0,64	0,53	0,37	0,71	0,59	0,42	0,99	0,83	0,58	1,28	1,07	0,75		●	
3.2	0,9	0,7*	0,6*	130	0,05	0,36	0,30	0,21	0,54	0,45	0,32	0,60	0,50	0,35	0,84	0,70	0,49	1,08	0,90	0,63		●	
3.3	0,9	0,7*	0,6*	150	0,05	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69		●	
3.4	0,9	0,7*	0,6*	130	0,05	0,33	0,28	0,20	0,49	0,41	0,29	0,55	0,46	0,32	0,76	0,64	0,45	0,99	0,82	0,58		●	
3.5	0,9	0,7*	0,6*	130	0,05	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69		●	
3.6	0,9	0,7*	0,6*	110	0,05	0,36	0,30	0,21	0,54	0,45	0,32	0,60	0,50	0,35	0,84	0,70	0,49	1,08	0,90	0,63		●	
3.7	0,9	0,7*	0,6*	130	0,05	0,39	0,33	0,23	0,59	0,49	0,35	0,66	0,55	0,38	0,92	0,77	0,54	1,18	0,98	0,69		●	
3.8	0,9	0,7*	0,6*	110	0,05	0,33	0,28	0,20	0,49	0,41	0,29	0,55	0,46	0,32	0,76	0,64	0,45	0,99	0,82	0,58		●	
4.1																							
4.2																							
4.3																							
4.4																							
4.5																							
4.6																							
4.7																							
4.8																							
4.9																							
4.10																							
4.11																							
4.12																							
4.13																							
4.14																							
4.15																							
4.16																							
4.17																							
4.18																							
4.19																							
5.1																							
5.2																							
5.3																							
5.4																							
5.5																							
5.6																							
5.7																							
5.8																							
5.9																							
5.10																							
5.11																							
6.1	0,9	0,7*	0,6*	70	0,025	0,20			0,30			0,33			0,46			0,49				●	
6.2	0,9	0,7*	0,6*	60	0,025	0,17			0,25			0,28			0,38			0,41				●	
6.3																							
6.4																							
6.5																							

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting Data – MultiChange – Finish milling heads – 52 863 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c m/min	Feedrates for extra short and short holder							
					Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm	Ø DC = 20 mm	● 1st choice		○ suitable
				$a_{p\,max.}$	7,5 mm	9,4 mm	11,3 mm	15,0 mm	18,8 mm			
					a_e 0,1–0,2 x DC	a_e 0,1–0,2 x DC	a_e 0,1–0,2 x DC	a_e 0,1–0,2 x DC	a_e 0,1–0,2 x DC	Emulsion	Compressed air	MMS
					f_z mm	f_z mm	f_z mm	f_z mm	f_z mm			
1.1	**0,9**	**0,7***	**0,6***	**250**	0,05	0,06	0,08	0,10	0,13	○	●	○
1.2	**0,9**	**0,7***	**0,6***	**280**	0,06	0,07	0,09	0,11	0,15	○	●	○
1.3	**0,9**	**0,7***	**0,6***	**250**	0,05	0,06	0,08	0,10	0,13	○	●	○
1.4	**0,9**	**0,7***	**0,6***	**210**	0,05	0,06	0,07	0,09	0,12	○	●	○
1.5	**0,9**	**0,7***	**0,6***	**220**	0,06	0,07	0,08	0,11	0,14	○	●	○
1.6	**0,9**	**0,7***	**0,6***	**200**	0,05	0,06	0,07	0,09	0,12	○	●	○
1.7	**0,9**	**0,7***	**0,6***	**200**	0,06	0,07	0,08	0,11	0,14	○	●	○
1.8	**0,9**	**0,7***	**0,6***	**140**	0,04	0,05	0,06	0,07	0,09	○	●	○
1.9	**0,9**	**0,7***	**0,6***	**200**	0,05	0,06	0,08	0,10	0,13	○	●	○
1.10	**0,9**	**0,7***	**0,6***	**170**	0,04	0,05	0,06	0,07	0,09	○	●	○
1.11	**0,9**	**0,7***	**0,6***	**140**	0,03	0,04	0,05	0,06	0,08	○	●	○
1.12	**0,9**	**0,7***	**0,6***	**130**	0,04	0,05	0,06	0,07	0,09	○	●	○
1.13	**0,9**	**0,7***	**0,6***	**100**	0,04	0,05	0,06	0,07	0,09	○	●	○
1.14												
1.15	**0,9**	**0,7***	**0,6***	**110**	0,03	0,04	0,05	0,06	0,08	○	●	○
1.16	**0,9**	**0,7***	**0,6***	**110**	0,03	0,04	0,05	0,06	0,08	○	●	○
2.1	0,9	0,7*	0,6*	80	0,04	0,05	0,06	0,08	0,10	●		
2.2	0,9	0,7*	0,6*	80	0,04	0,05	0,06	0,07	0,09	●		
2.3	0,9	0,7*	0,6*	70	0,04	0,05	0,06	0,07	0,09	●		
2.4	0,9	0,7*	0,6*	60	0,03	0,04	0,04	0,05	0,07	●		
2.5	0,9	0,7*	0,6*	70	0,03	0,04	0,05	0,06	0,08	●		
2.6	0,9	0,7*	0,6*	70	0,03	0,04	0,05	0,06	0,08	●		
2.7	0,9	0,7*	0,6*	60	0,03	0,04	0,04	0,05	0,07	●		
3.1	**0,9**	**0,7***	**0,6***	**210**	0,06	0,07	0,09	0,11	0,15		●	
3.2	**0,9**	**0,7***	**0,6***	**170**	0,05	0,06	0,08	0,10	0,13		●	
3.3	**0,9**	**0,7***	**0,6***	**200**	0,06	0,07	0,08	0,11	0,14		●	
3.4	**0,9**	**0,7***	**0,6***	**170**	0,05	0,06	0,07	0,09	0,12		●	
3.5	**0,9**	**0,7***	**0,6***	**170**	0,06	0,07	0,08	0,11	0,14		●	
3.6	**0,9**	**0,7***	**0,6***	**140**	0,05	0,06	0,08	0,10	0,13		●	
3.7	**0,9**	**0,7***	**0,6***	**170**	0,06	0,07	0,08	0,11	0,14		●	
3.8	**0,9**	**0,7***	**0,6***	**140**	0,05	0,06	0,07	0,09	0,12		●	
4.1												
4.2												
4.3												
4.4												
4.5												
4.6												
4.7												
4.8												
4.9												
4.10	**0,9**	**0,7***	**0,6***	220	0,03	0,04	0,05	0,06	0,08	●		○
4.11	**0,9**	**0,7***	**0,6***	310	0,06	0,07	0,09	0,11	0,15	●		○
4.12												
4.13												
4.14												
4.15												
4.16												
4.17												
4.18												
4.19												
5.1												
5.2												
5.3												
5.4												
5.5												
5.6												
5.7												
5.8												
5.9												
5.10												
5.11												
6.1												
6.2												
6.3												
6.4												
6.5												

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting Data – MultiChange – Ball nosed and torus milling heads – 52 866 ... / 52 865 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	Feedrates for extra short and short holder															● 1st choice	○ suitable	
				Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm					
				$a_{p\,max.}$ 4,8 mm	1,6 mm	0,8 mm	5,6 mm	2,0 mm	1,0 mm	6,8 mm	2,4 mm	1,2 mm	9,0 mm	3,2 mm	1,6 mm	11,3 mm	4,0 mm	2,0 mm			
				a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	Emulsion	Compressed air	MMS
				v_c m/min	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,9	0,7*	0,6*	180	0,07	0,06	0,05	0,07	0,06	0,05	0,12	0,10	0,08	0,15	0,12	0,10	0,18	0,15	0,12	○	●	○
1.2	0,9	0,7*	0,6*	200	0,08	0,07	0,05	0,08	0,07	0,05	0,13	0,11	0,09	0,17	0,14	0,11	0,21	0,17	0,14	○	●	○
1.3	0,9	0,7*	0,6*	180	0,07	0,06	0,05	0,07	0,06	0,05	0,12	0,10	0,08	0,15	0,12	0,10	0,18	0,15	0,12	○	●	○
1.4	0,9	0,7*	0,6*	150	0,06	0,05	0,04	0,06	0,05	0,04	0,10	0,09	0,07	0,13	0,11	0,09	0,16	0,13	0,11	○	●	○
1.5	0,9	0,7*	0,6*	160	0,07	0,06	0,05	0,07	0,06	0,05	0,13	0,11	0,09	0,16	0,13	0,11	0,19	0,16	0,13	○	●	○
1.6	0,9	0,7*	0,6*	140	0,06	0,05	0,04	0,06	0,05	0,04	0,10	0,09	0,07	0,13	0,11	0,09	0,16	0,13	0,11	○	●	○
1.7	0,9	0,7*	0,6*	140	0,07	0,06	0,05	0,07	0,06	0,05	0,13	0,11	0,09	0,16	0,13	0,11	0,19	0,16	0,13	○	●	○
1.8	0,9	0,7*	0,6*	100	0,05	0,04	0,03	0,05	0,04	0,03	0,09	0,07	0,06	0,10	0,09	0,07	0,13	0,11	0,09	○	●	○
1.9	0,9	0,7*	0,6*	140	0,07	0,06	0,05	0,07	0,06	0,05	0,12	0,10	0,08	0,15	0,12	0,10	0,18	0,15	0,12	○	●	○
1.10	0,9	0,7*	0,6*	120	0,05	0,04	0,03	0,05	0,04	0,03	0,09	0,07	0,06	0,10	0,09	0,07	0,13	0,11	0,09	○	●	○
1.11	0,9	0,7*	0,6*	100	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	○	●	○
1.12	0,9	0,7*	0,6*	90	0,05	0,04	0,03	0,05	0,04	0,03	0,09	0,07	0,06	0,10	0,09	0,07	0,13	0,11	0,09	○	●	○
1.13	0,9	0,7*	0,6*	70	0,05	0,04	0,03	0,05	0,04	0,03	0,09	0,07	0,06	0,10	0,09	0,07	0,13	0,11	0,09	○	●	○
1.14																						
1.15	0,9	0,7*	0,6*	80	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	○	●	○
1.16	0,9	0,7*	0,6*	80	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	○	●	○
2.1	0,9	0,7*	0,6*	60	0,06	0,05	0,04	0,06	0,05	0,04	0,10	0,08	0,07	0,12	0,10	0,08	0,15	0,12	0,10	●		
2.2	0,9	0,7*	0,6*	60	0,05	0,04	0,03	0,05	0,04	0,03	0,09	0,07	0,06	0,10	0,09	0,07	0,13	0,11	0,09	●		
2.3	0,9	0,7*	0,6*	50	0,05	0,04	0,03	0,05	0,04	0,03	0,09	0,07	0,06	0,10	0,09	0,07	0,13	0,11	0,09	●		
2.4	0,9	0,7*	0,6*	40	0,04	0,03	0,03	0,04	0,03	0,03	0,06	0,05	0,04	0,08	0,07	0,05	0,10	0,08	0,07	●		
2.5	0,9	0,7*	0,6*	50	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	●		
2.6	0,9	0,7*	0,6*	50	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	●		
2.7	0,9	0,7*	0,6*	40	0,04	0,03	0,03	0,04	0,03	0,03	0,06	0,05	0,04	0,08	0,07	0,05	0,10	0,08	0,07	●		
3.1	0,9	0,7*	0,6*	150	0,08	0,07	0,05	0,08	0,07	0,05	0,13	0,11	0,09	0,17	0,14	0,11	0,21	0,17	0,14		●	
3.2	0,9	0,7*	0,6*	120	0,07	0,06	0,05	0,07	0,06	0,05	0,12	0,10	0,08	0,15	0,12	0,10	0,18	0,15	0,12		●	
3.3	0,9	0,7*	0,6*	140	0,07	0,06	0,05	0,07	0,06	0,05	0,13	0,11	0,09	0,16	0,13	0,11	0,19	0,16	0,13		●	
3.4	0,9	0,7*	0,6*	120	0,06	0,05	0,04	0,06	0,05	0,04	0,10	0,09	0,07	0,13	0,11	0,09	0,16	0,13	0,11		●	
3.5	0,9	0,7*	0,6*	120	0,07	0,06	0,05	0,07	0,06	0,05	0,13	0,11	0,09	0,16	0,13	0,11	0,19	0,16	0,13		●	
3.6	0,9	0,7*	0,6*	100	0,07	0,06	0,05	0,07	0,06	0,05	0,12	0,10	0,08	0,15	0,12	0,10	0,18	0,15	0,12		●	
3.7	0,9	0,7*	0,6*	120	0,07	0,06	0,05	0,07	0,06	0,05	0,13	0,11	0,09	0,16	0,13	0,11	0,19	0,16	0,13		●	
3.8	0,9	0,7*	0,6*	100	0,06	0,05	0,04	0,06	0,05	0,04	0,10	0,09	0,07	0,13	0,11	0,09	0,16	0,13	0,11		●	
4.1	0,9	0,7*	0,6*	500	0,12	0,10	0,08	0,12	0,10	0,08	0,20	0,17	0,13	0,25	0,21	0,17	0,30	0,25	0,20	●		○
4.2	0,9	0,7*	0,6*	450	0,12	0,10	0,08	0,12	0,10	0,08	0,20	0,17	0,13	0,25	0,21	0,17	0,30	0,25	0,20	●		○
4.3	0,9	0,7*	0,6*	380	0,11	0,09	0,07	0,11	0,09	0,07	0,19	0,16	0,13	0,24	0,20	0,16	0,28	0,24	0,19	●		○
4.4	0,9	0,7*	0,6*	300	0,10	0,09	0,07	0,10	0,09	0,07	0,18	0,15	0,12	0,22	0,19	0,15	0,27	0,23	0,18	●		○
4.5	0,9	0,7*	0,6*	150	0,09	0,08	0,06	0,09	0,08	0,06	0,16	0,13	0,11	0,20	0,17	0,13	0,24	0,20	0,16	●		○
4.6	0,9	0,7*	0,6*	250	0,07	0,06	0,05	0,07	0,06	0,05	0,13	0,11	0,09	0,16	0,13	0,11	0,19	0,16	0,13	●		○
4.7	0,9	0,7*	0,6*	200	0,07	0,06	0,05	0,07	0,06	0,05	0,12	0,10	0,08	0,15	0,12	0,10	0,18	0,15	0,12	●		○
4.8	0,9	0,7*	0,6*	220	0,06	0,05	0,04	0,06	0,05	0,04	0,10	0,08	0,07	0,12	0,10	0,08	0,15	0,12	0,10	●		○
4.9	0,9	0,7*	0,6*	200	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	●		○
4.10	0,9	0,7*	0,6*	160	0,04	0,04	0,03	0,04	0,04	0,03	0,07	0,06	0,05	0,09	0,08	0,06	0,11	0,09	0,07	●		○
4.11	0,9	0,7*	0,6*	220	0,08	0,07	0,05	0,08	0,07	0,05	0,13	0,11	0,09	0,17	0,14	0,11	0,21	0,17	0,14	●		○
4.12	0,9	0,7*	0,6*	190	0,08	0,07	0,05	0,08	0,07	0,05	0,13	0,11	0,09	0,17	0,14	0,11	0,21	0,17	0,14	●		○
4.13																						
4.14																						
4.15																						
4.16																						
4.17																						
4.18																						
4.19																						
5.1																						
5.2																						
5.3																						
5.4																						
5.5																						
5.6																						
5.7																						
5.8																						
5.9																						
5.10																						
5.11																						
6.1																						
6.2																						
6.3																						
6.4																						
6.5																						

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting Data – MultiChange – HSC Ball nosed and torus milling heads – 52 866 ... / 52 865 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder		Feedrates for extra short and short holder					● 1st choice		○ suitable
					Ø DC = 8 mm	Ø DC = 10 mm	Ø DC = 12 mm	Ø DC = 16 mm	Ø DC = 20 mm			
					a_e/a_p = 0,04	a_e/a_p = 0,05	a_e/a_p = 0,06	a_e/a_p = 0,08	a_e/a_p = 0,10			
				v_c m/min	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.1	**0,9**	**0,7***	**0,6***	**540**	0,08	0,09	0,08	0,11	0,13	○	●	○
1.2	**0,9**	**0,7***	**0,6***	**600**	0,10	0,11	0,10	0,13	0,16	○	●	○
1.3	**0,9**	**0,7***	**0,6***	**540**	0,08	0,09	0,08	0,11	0,13	○	●	○
1.4	**0,9**	**0,7***	**0,6***	**450**	0,08	0,08	0,08	0,10	0,12	○	●	○
1.5	**0,9**	**0,7***	**0,6***	**480**	0,09	0,10	0,09	0,12	0,14	○	●	○
1.6	**0,9**	**0,7***	**0,6***	**420**	0,08	0,08	0,08	0,10	0,12	○	●	○
1.7	**0,9**	**0,7***	**0,6***	**420**	0,09	0,10	0,09	0,12	0,14	○	●	○
1.8	**0,9**	**0,7***	**0,6***	**300**	0,06	0,07	0,06	0,08	0,10	○	●	○
1.9	**0,9**	**0,7***	**0,6***	**420**	0,08	0,09	0,08	0,11	0,13	○	●	○
1.10	**0,9**	**0,7***	**0,6***	**360**	0,06	0,07	0,06	0,08	0,10	○	●	○
1.11	**0,9**	**0,7***	**0,6***	**300**	0,05	0,06	0,05	0,07	0,09	○	●	○
1.12	**0,9**	**0,7***	**0,6***	**270**	0,06	0,07	0,06	0,08	0,10	○	●	○
1.13	**0,9**	**0,7***	**0,6***	**210**	0,06	0,07	0,06	0,08	0,10	○	●	○
1.14												
1.15	**0,9**	**0,7***	**0,6***	**240**	0,05	0,06	0,05	0,07	0,09	○	●	○
1.16	**0,9**	**0,7***	**0,6***	**240**	0,05	0,06	0,05	0,07	0,09	○	●	○
2.1	0,9	0,7*	0,6*	180	0,07	0,08	0,07	0,09	0,11	●		
2.2	0,9	0,7*	0,6*	180	0,06	0,07	0,06	0,08	0,10	●		
2.3	0,9	0,7*	0,6*	150	0,06	0,07	0,06	0,08	0,10	●		
2.4	0,9	0,7*	0,6*	120	0,05	0,05	0,05	0,06	0,07	●		
2.5	0,9	0,7*	0,6*	150	0,05	0,06	0,05	0,07	0,09	●		
2.6	0,9	0,7*	0,6*	150	0,05	0,06	0,05	0,07	0,09	●		
2.7	0,9	0,7*	0,6*	120	0,05	0,05	0,05	0,06	0,07	●		
3.1	**0,9**	**0,7***	**0,6***	**450**	0,10	0,11	0,10	0,13	0,16		●	
3.2	**0,9**	**0,7***	**0,6***	**360**	0,08	0,09	0,08	0,11	0,13		●	
3.3	**0,9**	**0,7***	**0,6***	**420**	0,09	0,10	0,09	0,12	0,14		●	
3.4	**0,9**	**0,7***	**0,6***	**360**	0,08	0,08	0,08	0,10	0,12		●	
3.5	**0,9**	**0,7***	**0,6***	**360**	0,09	0,10	0,09	0,12	0,14		●	
3.6	**0,9**	**0,7***	**0,6***	**300**	0,08	0,09	0,08	0,11	0,13		●	
3.7	**0,9**	**0,7***	**0,6***	**360**	0,09	0,10	0,09	0,12	0,14		●	
3.8	**0,9**	**0,7***	**0,6***	**300**	0,08	0,08	0,08	0,10	0,12		●	
4.1	0,9	0,7*	0,6*	1500	0,14	0,16	0,14	0,19	0,23	●		○
4.2	0,9	0,7*	0,6*	1350	0,14	0,16	0,14	0,19	0,23	●		○
4.3	0,9	0,7*	0,6*	1140	0,13	0,15	0,13	0,18	0,22	●		○
4.4	0,9	0,7*	0,6*	900	0,13	0,14	0,13	0,17	0,20	●		○
4.5	0,9	0,7*	0,6*	450	0,11	0,13	0,11	0,15	0,18	●		○
4.6	0,9	0,7*	0,6*	750	0,09	0,10	0,09	0,12	0,14	●		○
4.7	0,9	0,7*	0,6*	600	0,08	0,09	0,08	0,11	0,13	●		○
4.8	0,9	0,7*	0,6*	660	0,07	0,08	0,07	0,09	0,11	●		○
4.9	0,9	0,7*	0,6*	600	0,05	0,06	0,05	0,07	0,09	●		○
4.10	0,9	0,7*	0,6*	480	0,05	0,06	0,05	0,07	0,09	●		○
4.11	0,9	0,7*	0,6*	660	0,10	0,11	0,10	0,13	0,16	●		○
4.12	0,9	0,7*	0,6*	570	0,10	0,11	0,10	0,13	0,16	●		○
4.13												
4.14												
4.15												
4.16												
4.17												
4.18												
4.19												
5.1												
5.2												
5.3												
5.4												
5.5												
5.6												
5.7												
5.8												
5.9												
5.10												
5.11												
6.1												
6.2												
6.3												
6.4												
6.5												

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Torus milling heads – 52 870 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c m/min	Feedrates for extra short and short holder								Emulsion ●	Compressed air ○	MMS ○
					Ø DC = 10 mm		Ø DC = 12 mm		Ø DC = 16 mm		Ø DC = 20 mm		1st choice		suitable
				$a_{p\,max.}$	5,0 mm	3,0 mm	6,0 mm	3,6 mm	8,0 mm	4,8 mm	10,0 mm	6,0 mm			
					a_e = DC		a_e = DC		a_e = DC		a_e = DC				
					f_z mm		f_z mm		f_z mm		f_z mm				
1.1															
1.2															
1.3															
1.4															
1.5															
1.6															
1.7															
1.8															
1.9															
1.10															
1.11															
1.12															
1.13															
1.14															
1.15															
1.16															
2.1															
2.2															
2.3															
2.4															
2.5															
2.6															
2.7															
3.1															
3.2															
3.3															
3.4															
3.5															
3.6															
3.7															
3.8															
4.1	0,9	0,7	0,6	290–650	0,19–0,21	0,24–0,27	0,21–0,23	0,27–0,29	0,23–0,25	0,29–0,31	0,25–0,27	0,30–0,32	●		○
4.2	0,9	0,7	0,6	290–650	0,19–0,21	0,24–0,27	0,21–0,23	0,27–0,29	0,23–0,25	0,29–0,31	0,25–0,27	0,30–0,32	●		○
4.3	0,9	0,7	0,6	250–550	0,19–0,21	0,24–0,27	0,21–0,23	0,27–0,29	0,23–0,25	0,29–0,31	0,25–0,27	0,30–0,32	●		○
4.4	0,9	0,7	0,6	210–500	0,19–0,21	0,24–0,27	0,21–0,23	0,27–0,29	0,23–0,25	0,29–0,31	0,25–0,27	0,30–0,32	●		○
4.5	0,9	0,7	0,6	280–450	0,19–0,21	0,24–0,27	0,21–0,23	0,27–0,29	0,23–0,25	0,29–0,31	0,25–0,27	0,30–0,32	●		○
4.6															
4.7															
4.8															
4.9															
4.10															
4.11															
4.12															
4.13															
4.14															
4.15															
4.16															
4.17															
4.18															
4.19															
5.1															
5.2															
5.3															
5.4															
5.5															
5.6															
5.7															
5.8															
5.9															
5.10															
5.11															
6.1															
6.2															
6.3															
6.4															
6.5															

For unstable applications, the cutting data can be reduced.

14

Cutting Data – MultiChange – Quarter round milling heads – 52 869 ...

		Ø DCX = 8 mm		Ø DCX = 10 mm		Ø DCX = 12 mm			Ø DCX = 16 mm			Ø DCX = 20 mm		● 1st choice		○ suitable
		PRFRAD = 0,5	PRFRAD = 1,0	PRFRAD = 1,5	PRFRAD = 2,0	PRFRAD = 2,5	PRFRAD = 3,0	PRFRAD = 3,5	PRFRAD = 4,0	PRFRAD = 4,5	PRFRAD = 5,0	PRFRAD = 5,0	PRFRAD = 6,0			
Index	v_c m/min	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.1	150	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08	○	●	○
1.2	170	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	○	●	○
1.3	150	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08	○	●	○
1.4	130	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07	○	●	○
1.5	140	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
1.6	120	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07	○	●	○
1.7	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
1.8	90	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	○	●	○
1.9	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08	○	●	○
1.10	100	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	○	●	○
1.11	90	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
1.12	80	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	○	●	○
1.13	60	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	○	●	○
1.14																
1.15	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
1.16	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
2.1	50	0,03	0,02	0,03	0,02	0,04	0,04	0,03	0,06	0,05	0,05	0,07	0,06	●		
2.2	50	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	●		
2.3	40	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	●		
2.4	30	0,02	0,01	0,02	0,02	0,03	0,02	0,02	0,04	0,04	0,03	0,05	0,04	●		
2.5	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
2.6	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
2.7	30	0,02	0,01	0,02	0,02	0,03	0,02	0,02	0,04	0,04	0,03	0,05	0,04	●		
3.1	130	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09		●	
3.2	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08		●	
3.3	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
3.4	100	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07		●	
3.5	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
3.6	90	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08		●	
3.7	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
3.8	90	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07		●	
4.1	430	0,05	0,04	0,06	0,05	0,09	0,08	0,07	0,12	0,11	0,10	0,14	0,13	●		○
4.2	380	0,05	0,04	0,06	0,05	0,09	0,08	0,07	0,12	0,11	0,10	0,14	0,13	●		○
4.3	320	0,05	0,04	0,06	0,05	0,08	0,07	0,07	0,11	0,11	0,10	0,13	0,12	●		○
4.4	260	0,05	0,04	0,05	0,05	0,08	0,07	0,06	0,11	0,10	0,09	0,12	0,12	●		○
4.5	130	0,04	0,03	0,05	0,04	0,07	0,06	0,05	0,10	0,09	0,08	0,11	0,10	●		○
4.6	210	0,03	0,03	0,04	0,03	0,06	0,05	0,04	0,08	0,07	0,07	0,09	0,08	●		○
4.7	170	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08	●		○
4.8	190	0,02	0,02	0,03	0,02	0,04	0,04	0,03	0,06	0,05	0,05	0,07	0,06	●		○
4.9	170	0,02	0,02	0,02	0,02	0,03	0,03	0,03	0,04	0,04	0,04	0,05	0,05	●		○
4.10	140	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		○
4.11	190	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	●		○
4.12																
4.13																
4.14																
4.15																
4.16																
4.17																
4.18																
4.19																
5.1																
5.2																
5.3																
5.4																
5.5																
5.6																
5.7																
5.8																
5.9																
5.10																
5.11																
6.1																
6.2																
6.3																
6.4																
6.5																

Cutting Data – MultiChange – Deburring heads – 52 867 ... / 52 868 ...

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c m/min	Feedrates for extra short and short holder: Ø DCX = 10 mm	Ø DCX = 12 mm	Ø DCX = 16 mm	Ø DCX = 20 mm	● 1st choice: Emulsion	○ suitable: Compressed air	MMS
				$a_{p\,max.}$ 52 867 ...	5,0 mm	6,0 mm	4,8 mm	6,0 mm			
				$a_{p\,max.}$ 52 868 ...	1,25 mm	1,5 mm	2,0 mm	2,5 mm			
					a_e 0,1–0,2 x DCX	a_e 0,1–0,2 x DCX	a_e 0,1–0,2 x DCX	a_e 0,1–0,2 x DCX			
					f_z mm	f_z mm	f_z mm	f_z mm			
1.1	**0,9**	**0,7**	**0,6**	**200**	0,07	0,09	0,12	0,14	○	●	○
1.2	**0,9**	**0,7**	**0,6**	**220**	0,09	0,11	0,14	0,17	○	●	○
1.3	**0,9**	**0,7**	**0,6**	**200**	0,07	0,09	0,12	0,17	○	●	○
1.4	**0,9**	**0,7**	**0,6**	**170**	0,07	0,08	0,11	0,15	○	●	○
1.5	**0,9**	**0,7**	**0,6**	**180**	0,08	0,10	0,13	0,17	○	●	○
1.6	**0,9**	**0,7**	**0,6**	**150**	0,07	0,08	0,11	0,15	○	●	○
1.7	**0,9**	**0,7**	**0,6**	**150**	0,08	0,10	0,13	0,17	○	●	○
1.8	**0,9**	**0,7**	**0,6**	**110**	0,05	0,07	0,09	0,12	○	●	○
1.9	**0,9**	**0,7**	**0,6**	**150**	0,07	0,09	0,12	0,12	○	●	○
1.10	**0,9**	**0,7**	**0,6**	**130**	0,05	0,07	0,09	0,09	○	●	○
1.11	**0,9**	**0,7**	**0,6**	**110**	0,05	0,06	0,08	0,06	○	●	○
1.12	**0,9**	**0,7**	**0,6**	**100**	0,05	0,07	0,09	0,04	○	●	○
1.13	**0,9**	**0,7**	**0,6**	**80**	0,05	0,07	0,09	0,03	○	●	○
1.14											
1.15	**0,9**	**0,7**	**0,6**	**90**	0,05	0,06	0,08	0,09	○	●	○
1.16	**0,9**	**0,7**	**0,6**	**90**	0,05	0,06	0,08	0,09	○	●	○
2.1	0,9	0,7	0,6	70	0,06	0,08	0,10	0,12	●		
2.2	0,9	0,7	0,6	70	0,05	0,07	0,09	0,11	●		
2.3	0,9	0,7	0,6	60	0,05	0,07	0,09	0,11	●		
2.4	0,9	0,7	0,6	40	0,04	0,05	0,07	0,08	●		
2.5	0,9	0,7	0,6	60	0,05	0,06	0,08	0,09	●		
2.6	0,9	0,7	0,6	60	0,05	0,06	0,08	0,09	●		
2.7	0,9	0,7	0,6	40	0,04	0,05	0,07	0,08	●		
3.1	**0,9**	**0,7**	**0,6**	**170**	0,09	0,11	0,14	0,17		●	
3.2	**0,9**	**0,7**	**0,6**	**130**	0,07	0,09	0,12	0,15		●	
3.3	**0,9**	**0,7**	**0,6**	**150**	0,08	0,10	0,13	0,16		●	
3.4	**0,9**	**0,7**	**0,6**	**130**	0,07	0,08	0,11	0,13		●	
3.5	**0,9**	**0,7**	**0,6**	**130**	0,08	0,10	0,13	0,16		●	
3.6	**0,9**	**0,7**	**0,6**	**110**	0,07	0,09	0,12	0,15		●	
3.7	**0,9**	**0,7**	**0,6**	**130**	0,08	0,10	0,13	0,16		●	
3.8	**0,9**	**0,7**	**0,6**	**110**	0,07	0,08	0,11	0,13		●	
4.1	**0,9**	**0,7**	**0,6**	**550**	0,12	0,16	0,21	0,25	●		○
4.2	**0,9**	**0,7**	**0,6**	**500**	0,12	0,16	0,21	0,25	●		○
4.3	**0,9**	**0,7**	**0,6**	**420**	0,12	0,15	0,20	0,24	●		○
4.4	**0,9**	**0,7**	**0,6**	**330**	0,11	0,14	0,19	0,23	●		○
4.5	**0,9**	**0,7**	**0,6**	**170**	0,10	0,13	0,17	0,20	●		○
4.6	**0,9**	**0,7**	**0,6**	**280**	0,08	0,10	0,13	0,16	●		○
4.7	**0,9**	**0,7**	**0,6**	**220**	0,07	0,09	0,12	0,15	●		○
4.8	**0,9**	**0,7**	**0,6**	**240**	0,06	0,08	0,10	0,12	●		○
4.9	**0,9**	**0,7**	**0,6**	**220**	0,05	0,06	0,08	0,09	●		○
4.10	**0,9**	**0,7**	**0,6**	**180**	0,05	0,06	0,08	0,09	●		○
4.11	**0,9**	**0,7**	**0,6**	**240**	0,09	0,11	0,14	0,17	●		○
4.12	**0,9**	**0,7**	**0,6**	**210**	0,09	0,11	0,14	0,17	●		○
4.13											
4.14											
4.15											
4.16											
4.17											
4.18											
4.19											
5.1											
5.2											
5.3											
5.4											
5.5											
5.6											
5.7											
5.8											
5.9											
5.10											
5.11											
6.1											
6.2											
6.3											
6.4											
6.5											

For unstable applications the machining parameters must be reduced.

14

Cutting data – End Mills – W/HPC, short

	Emulsion	MMS		Ø DC = 2,7–3,0 mm			Ø DC = 3,7–4,0 mm			Ø DC = 4,7–5,0 mm			Ø DC = 5,7–7,0 mm			Ø DC = 7,7–9,0 mm			Ø DC = 9,7–11,0 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm																		
4.1	700	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,20	0,15	0,10	0,24	0,18	0,12
4.2	700	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,20	0,15	0,10	0,24	0,18	0,12
4.3	420	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,20	0,15	0,10	0,24	0,18	0,12
4.4	420	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,20	0,15	0,10	0,24	0,18	0,12
4.5	280	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,20	0,15	0,10	0,24	0,18	0,12
4.6	200	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10
4.7	180	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10
4.8	175	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10
4.9	175	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10
4.10	175	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10
4.11	280	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10
4.12	210	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,16	0,12	0,08	0,20	0,15	0,10

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cutting data – End Mills – W/HPC, long

	Emulsion	MMS		Ø DC = 2,7–3,0 mm			Ø DC = 3,7–4,0 mm			Ø DC = 4,7–5,0 mm			Ø DC = 5,7–7,0 mm			Ø DC = 7,7–9,0 mm			Ø DC = 9,7–11,0 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm																		
4.1	400	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,16	0,12	0,08	0,20	0,15	0,10
4.2	400	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,16	0,12	0,08	0,20	0,15	0,10
4.3	240	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,16	0,12	0,08	0,20	0,15	0,10
4.4	240	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,16	0,12	0,08	0,20	0,15	0,10
4.5	160	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,16	0,12	0,08	0,20	0,15	0,10
4.6	115	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09
4.7	120	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09
4.8	100	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09
4.9	100	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09
4.10	100	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09
4.11	160	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09
4.12	120	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,14	0,10	0,07	0,18	0,13	0,09

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cutting data – End Mills – W and WR/HPC, extra long

	Emulsion	MMS		Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6–7 mm			Ø DC = 8–9 mm			Ø DC = 10–11 mm		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max.}$ x DC	f_z mm																		
4.1	300	0,75*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03	0,07	0,05	0,04
4.2	300	0,75*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03	0,07	0,05	0,04
4.3	180	0,75*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03	0,07	0,05	0,04
4.4	180	0,75*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03	0,07	0,05	0,04
4.5	125	0,75*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,06	0,05	0,03	0,07	0,05	0,04
4.6	90	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03
4.7	90	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03
4.8	75	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03
4.9	75	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03
4.10	75	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03
4.11	125	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03
4.12	90	0,75*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,04	0,03	0,02	0,05	0,04	0,03

* = use a_p 1.25 x DC only in a_e range 0.1–0.4 x DC

Cooling lubrication with emulsion

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

	Ø DC = 11,7–13,0 mm			Ø DC = 13,7–15,0 mm			Ø DC = 15,7–16,0 mm			Ø DC = 18,0 mm			Ø DC = 19,7–20,0 mm			Ø DC = 24,7–25,0 mm		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	0,27	0,22	0,15	0,29	0,23	0,16	0,31	0,24	0,17	0,33	0,25	0,18	0,34	0,27	0,27	0,35	0,28	0,22
4.2	0,27	0,22	0,15	0,29	0,23	0,16	0,31	0,24	0,17	0,33	0,25	0,18	0,34	0,27	0,27	0,35	0,28	0,22
4.3	0,27	0,22	0,15	0,29	0,23	0,16	0,31	0,24	0,17	0,33	0,25	0,18	0,34	0,27	0,27	0,35	0,28	0,22
4.4	0,27	0,22	0,15	0,29	0,23	0,16	0,31	0,24	0,17	0,33	0,25	0,18	0,34	0,27	0,27	0,35	0,28	0,22
4.5	0,27	0,22	0,15	0,29	0,23	0,16	0,31	0,24	0,17	0,33	0,25	0,18	0,34	0,27	0,27	0,35	0,28	0,22
4.6	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20
4.7	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20
4.8	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20
4.9	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20
4.10	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20
4.11	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20
4.12	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,24	0,32	0,26	0,20

	Ø DC = 11,7–13,0 mm			Ø DC = 13,7–15,0 mm			Ø DC = 15,7–16,0 mm			Ø DC = 18,0 mm			Ø DC = 19,7–20,0 mm			Ø DC = 24,7–25,0 mm		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,17	0,32	0,26	0,20
4.2	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,17	0,32	0,26	0,20
4.3	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,17	0,32	0,26	0,20
4.4	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,17	0,32	0,26	0,20
4.5	0,22	0,17	0,12	0,24	0,18	0,13	0,25	0,20	0,14	0,27	0,21	0,15	0,30	0,24	0,17	0,32	0,26	0,20
4.6	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18
4.7	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18
4.8	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18
4.9	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18
4.10	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18
4.11	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18
4.12	0,20	0,16	0,11	0,22	0,17	0,12	0,23	0,18	0,13	0,26	0,20	0,14	0,26	0,21	0,15	0,29	0,23	0,18

	Ø DC = 12–13 mm			Ø DC = 14–15 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20 mm			Ø DC = 25 mm		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
4.1	0,08	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,16	0,13	0,10
4.2	0,08	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,16	0,13	0,10
4.3	0,08	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,16	0,13	0,10
4.4	0,08	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,16	0,13	0,10
4.5	0,08	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,16	0,13	0,10
4.6	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09
4.7	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09
4.8	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09
4.9	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09
4.10	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09
4.11	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09
4.12	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,14	0,12	0,09

Cutting data standard values – End mills – 54 001 ... – 54 003 ... / 54 050 ... – 54 054 ...

Index	Type short	Type long / extra long	Type short / long	Type extra long	Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c m/min		$a_{p\,max.}$ x DC	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	210	170	1,0	0,5	0,027	0,021	0,015	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.2	220	180	1,0	0,5	0,027	0,021	0,015	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.3	190	150	1,0	0,5	0,019	0,015	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.4	170	140	1,0	0,5	0,014	0,011	0,008	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.5	180	145	1,0	0,5	0,019	0,015	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.6	170	140	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.7	170	140	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.8	150	125	1,0	0,5	0,014	0,011	0,008	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.9	150	120	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.10	170	140	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.11	150	125	1,0	0,5	0,014	0,011	0,008	0,024	0,019	0,014	0,036	0,027	0,018	0,045	0,034	0,023	0,05	0,04	0,03
1.12	170	140	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.13																			
1.14																			
1.15	160	130	1,0	0,5	0,019	0,015	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
1.16	140	110	1,0	0,5	0,019	0,015	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
2.1																			
2.2																			
2.3																			
2.4																			
2.5																			
2.6																			
2.7																			
3.1	180	145	1,0	0,5	0,027	0,021	0,015	0,04	0,031	0,023	0,058	0,043	0,029	0,068	0,051	0,034	0,08	0,06	0,04
3.2	160	130	1,0	0,5	0,021	0,016	0,011	0,04	0,031	0,023	0,058	0,043	0,029	0,068	0,051	0,034	0,08	0,06	0,04
3.3	170	140	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
3.4	155	125	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
3.5	160	130	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
3.6	150	120	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
3.7	160	130	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
3.8	145	120	1,0	0,5	0,021	0,016	0,011	0,032	0,025	0,018	0,049	0,036	0,024	0,059	0,044	0,03	0,07	0,05	0,04
4.1																			
4.2																			
4.3																			
4.4																			
4.5																			
4.6																			
4.7																			
4.8																			
4.9																			
4.10																			
4.11																			
4.12																			
4.13																			
4.14																			
4.15																			
4.16																			
4.17																			
4.18																			
4.19																			
5.1																			
5.2																			
5.3																			
5.4																			
5.5																			
5.6																			
5.7																			
5.8																			
5.9																			
5.10																			
5.11																			
6.1																			
6.2																			
6.3																			
6.4																			
6.5																			

„Extra long“ version: when profiling with an a_e of 0.1–0.4 x DC an a_p of 1.0 x DC should be used.

Plunging angle for ramping and helical milling: 3°

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.2	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.3	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.4	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.5	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.6	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.7	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.8	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.9	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.10	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.11	0,07	0,05	0,04	0,09	0,07	0,05	0,09	0,07	0,05	0,11	0,09	0,07	●	○	○
1.12	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	○	○
1.13															
1.14															
1.15	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	○
1.16	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	○
2.1															
2.2															
2.3															
2.4															
2.5															
2.6															
2.7															
3.1	0,1	0,08	0,05	0,13	0,09	0,06	0,15	0,12	0,09	0,17	0,14	0,11	●	●	●
3.2	0,1	0,08	0,05	0,13	0,09	0,06	0,15	0,12	0,09	0,17	0,14	0,11	●	●	●
3.3	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	●
3.4	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	●
3.5	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	●
3.6	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	●
3.7	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	●
3.8	0,09	0,07	0,05	0,11	0,08	0,05	0,12	0,09	0,07	0,14	0,12	0,09	●	●	●
4.1															
4.2															
4.3															
4.4															
4.5															
4.6															
4.7															
4.8															
4.9															
4.10															
4.11															
4.12															
4.13															
4.14															
4.15															
4.16															
4.17															
4.18															
4.19															
5.1															
5.2															
5.3															
5.4															
5.5															
5.6															
5.7															
5.8															
5.9															
5.10															
5.11															
6.1															
6.2															
6.3															
6.4															
6.5															

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

Cutting data standard values – End mills – 54 004 ... – 54 006 ... / 54 060 ... – 54 064 ...

	Type short	Type long / extra long	Type short / long	Type extra long	Ø DC = 3 mm			Ø DC = 4 mm			Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min		$a_{p\,max.}$ x DC	$a_{p\,max.}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	**200**	**160**	1,0	0,5	0,024	0,019	0,014	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.2	**210**	**170**	1,0	0,5	0,024	0,019	0,014	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.3	**180**	**140**	1,0	0,5	0,017	0,013	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.4	**160**	**130**	1,0	0,5	0,012	0,009	0,007	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.5	**170**	**135**	1,0	0,5	0,017	0,013	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.6	**160**	**130**	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.7	**160**	**130**	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.8	**140**	**115**	1,0	0,5	0,012	0,009	0,007	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.9	**140**	**110**	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.10	**160**	**130**	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.11	**140**	**115**	1,0	0,5	0,012	0,009	0,007	0,022	0,017	0,012	0,032	0,024	0,016	0,04	0,03	0,02	0,05	0,04	0,02
1.12	**160**	**130**	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.13																			
1.14																			
1.15	**150**	**120**	1,0	0,5	0,017	0,013	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
1.16	**130**	**100**	1,0	0,5	0,017	0,013	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
2.1	**110**	**90**	1,0	0,5	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
2.2	**100**	**80**	1,0	0,5	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
2.3	**85**	**70**	1,0	0,5	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
2.4	**85**	**70**	1,0	0,5	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
2.5	**100**	**80**	1,0	0,5	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
2.6	**100**	**80**	1,0	0,5	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
2.7	**25**	**20**	1,0	0,5	0,009	0,007	0,005	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
3.1	170	135	1,0	0,5	0,024	0,019	0,014	0,036	0,028	0,02	0,051	0,038	0,026	0,061	0,045	0,03	0,07	0,05	0,04
3.2	140	110	1,0	0,5	0,018	0,014	0,01	0,036	0,028	0,02	0,051	0,038	0,026	0,061	0,045	0,03	0,07	0,05	0,04
3.3	160	130	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
3.4	130	100	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
3.5	150	120	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
3.6	140	110	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
3.7	150	120	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
3.8	135	110	1,0	0,5	0,018	0,014	0,01	0,029	0,022	0,016	0,043	0,032	0,022	0,053	0,039	0,026	0,06	0,05	0,03
4.1																			
4.2																			
4.3																			
4.4																			
4.5																			
4.6	240	190	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.7	260	200	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.8	140	110	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.9	120	95	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.10	100	80	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.11	300	240	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.12	260	200	1,0	0,5	0,029	0,022	0,016	0,038	0,029	0,021	0,054	0,041	0,027	0,065	0,048	0,032	0,08	0,06	0,04
4.13																			
4.14																			
4.15																			
4.16																			
4.17																			
4.18																			
4.19																			
5.1																			
5.2																			
5.3	**25**	**20**	0,5	0,25	0,011	0,008	0,006	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
5.4	**25**	**20**	0,5	0,25	0,011	0,008	0,006	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
5.5	**25**	**20**	0,5	0,25	0,011	0,008	0,006	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
5.6	**25**	**20**	0,5	0,25	0,011	0,008	0,006	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
5.7	**25**	**20**	0,5	0,25	0,011	0,008	0,006	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
5.8	**25**	**20**	0,5	0,25	0,011	0,008	0,006	0,015	0,012	0,009	0,022	0,016	0,011	0,029	0,022	0,014	0,03	0,03	0,02
5.9	**100**	**70**	0,5	0,25	0,021	0,017	0,012	0,031	0,024	0,017	0,046	0,034	0,023	0,056	0,042	0,028	0,07	0,05	0,03
5.10	**80**	**60**	0,5	0,25	0,015	0,012	0,009	0,023	0,018	0,013	0,034	0,025	0,017	0,043	0,032	0,021	0,05	0,04	0,03
5.11	**60**	**50**	0,5	0,25	0,012	0,009	0,007	0,018	0,014	0,01	0,027	0,02	0,014	0,036	0,027	0,018	0,04	0,03	0,02
6.1																			
6.2																			
6.3																			
6.4																			
6.5																			

„Extra-long" version: when profiling with an a_e of 0.1–0.4 x DC an a_p of 1.0 x DC should be used.

Plunging angle for ramping and helical milling: 3°

Index	Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm			● 1st choice		○ suitable
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z mm			f_z mm			f_z mm			f_z mm					
1.1	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.2	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.3	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.4	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.5	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.6	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.7	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.8	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.9	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.10	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.11	0,06	0,05	0,03	0,08	0,06	0,04	0,08	0,06	0,05	0,1	0,08	0,06	●	○	○
1.12	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.13															
1.14															
1.15	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
1.16	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	○	○
2.1	0,05	0,04	0,03	0,07	0,05	0,03	0,07	0,05	0,04	0,09	0,08	0,06	●		
2.2	0,05	0,04	0,03	0,07	0,05	0,03	0,07	0,05	0,04	0,09	0,08	0,06	●		
2.3	0,05	0,04	0,03	0,07	0,05	0,03	0,07	0,05	0,04	0,09	0,08	0,06	●		
2.4	0,05	0,04	0,03	0,07	0,05	0,03	0,07	0,05	0,04	0,09	0,08	0,06	●		
2.5	0,05	0,04	0,03	0,07	0,05	0,03	0,07	0,05	0,04	0,09	0,08	0,06	●		
2.6	0,05	0,04	0,03	0,07	0,05	0,03	0,07	0,05	0,04	0,09	0,08	0,06	●		
2.7	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	●		
3.1	0,09	0,07	0,05	0,11	0,08	0,06	0,14	0,1	0,08	0,15	0,12	0,1	●	●	●
3.2	0,09	0,07	0,05	0,11	0,08	0,06	0,14	0,1	0,08	0,15	0,12	0,1	●	●	●
3.3	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	●	●
3.4	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	●	●
3.5	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	●	●
3.6	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	●	●
3.7	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	●	●
3.8	0,08	0,06	0,04	0,1	0,07	0,05	0,11	0,08	0,06	0,13	0,1	0,08	●	●	●
4.1															
4.2															
4.3															
4.4															
4.5															
4.6	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,19	0,15	0,12	●		
4.7	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,19	0,15	0,12	●		
4.8	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,19	0,15	0,12	●		
4.9	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,19	0,15	0,12	●		
4.10	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,19	0,15	0,12	●		
4.11	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,16	0,13	0,1	●		
4.12	0,1	0,07	0,05	0,14	0,11	0,07	0,16	0,12	0,09	0,16	0,13	0,1	●		
4.13															
4.14															
4.15															
4.16															
4.17															
4.18															
4.19															
5.1															
5.2															
5.3	0,04	0,03	0,02	0,06	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.4	0,04	0,03	0,02	0,06	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.5	0,04	0,03	0,02	0,06	0,02	0,03	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.6	0,04	0,03	0,02	0,06	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.7	0,04	0,03	0,02	0,06	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.8	0,04	0,03	0,02	0,06	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	●		
5.9	0,09	0,06	0,04	0,12	0,09	0,06	0,13	0,1	0,08	0,15	0,12	0,09	●		
5.10	0,07	0,05	0,03	0,09	0,07	0,05	0,1	0,08	0,06	0,12	0,1	0,08	●		
5.11	0,05	0,04	0,03	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,07	●		
6.1															
6.2															
6.3															
6.4															
6.5															

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

14

Cutting data – Roughing Cutters – 52 338 ... – 52 343 ...

Index	Full slot milling v_c m/min	Contour milling v_c m/min	Ti1000 Ø DC = 6 mm f_z in mm		Ø DC = 8 mm f_z in mm		Ø DC = 10 mm f_z in mm		Ø DC = 12 mm f_z in mm	
1.1	150–170	170–200	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.2	170–190	190–220	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.3	140–170	170–190	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.4	100–140	140–180	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.5	140–170	170–190	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.6	120–140	140–160	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.7	100–140	140–170	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.8	100–120	120–160	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.9	150–170	170–200	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.10										
1.11										
1.12	140–170	170–190	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.13										
1.14										
1.15	80–120	120–150	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
1.16	80–120	120–150	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
2.1	45-65	65-85	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
2.2	45-65	65-85	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
2.3	30-50	45-60	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
2.4	25-40	40-50	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
2.5	40-60	60-85	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
2.6	50-70	70-90	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
2.7										
3.1	100–130	130–150	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.2	100–120	120–140	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.3	100–120	120–140	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.4	80–100	100–120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.5	100–120	120–140	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.6	80–100	100–120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.7	100–120	120–140	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
3.8	80–100	100–120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07
4.1										
4.2										
4.3										
4.4										
4.5										
4.6										
4.7										
4.8										
4.9										
4.10										
4.11										
4.12										
4.13										
4.14										
4.15										
4.16										
4.17										
4.18										
4.19										
5.1	30-40	40-50	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
5.2										
5.3										
5.4										
5.5										
5.6										
5.7										
5.8										
5.9										
5.10	35-50	50-60	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
5.11	30-40	40-50	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06
6.1										
6.2										
6.3										
6.4										
6.5										

For **Full slot milling** the values indicated in the table are based on:

a_e = 1,0 x DC / a_p = 1,0 x DC

For **Contour milling** the values indicated in the table are based on:

a_e = 0,4 x DC / a_p = 1,0 x DC

	Ti1000										● 1st choice		○ suitable
	Ø DC = 14 mm f_z in mm		Ø DC = 16 mm f_z in mm		Ø DC = 18 mm f_z in mm		Ø DC = 20 mm f_z in mm		Ø DC = 25 mm f_z in mm				
Index											Emulsion	Compressed air	MMS
1.1	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.2	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.3	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.4	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.5	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.6	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.7	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.8	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.9	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.10													
1.11													
1.12	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.13													
1.14													
1.15	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
1.16	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
2.1	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
2.2	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
2.3	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
2.4	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
2.5	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
2.6	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
2.7													
3.1	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.2	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.3	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.4	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.5	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.6	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.7	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
3.8	0,07	0,08	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
4.1													
4.2													
4.3													
4.4													
4.5													
4.6													
4.7													
4.8													
4.9													
4.10													
4.11													
4.12													
4.13													
4.14													
4.15													
4.16													
4.17													
4.18													
4.19													
5.1	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
5.2													
5.3													
5.4													
5.5													
5.6													
5.7													
5.8													
5.9													
5.10	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
5.11	0,06	0,07	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
6.1													
6.2													
6.3													
6.4													
6.5													

With tools with internal cooling (52 338.../52 339...) the cutting speed (v_c) can be increased by 20–30 %!

Cutting data – High Feed Cutters 56 900 ... / 56 902 ... / 56 904 ...

			TiAlN							
			Medium	Roughing	Medium	Roughing	Medium	Roughing	Medium	Roughing
	Medium machining	Rough machining	**Ø DCX = 6 mm**	**Ø DCX = 6 mm**	**Ø DCX = 8 mm**	**Ø DCX = 8 mm**	**Ø DCX = 10 mm**	**Ø DCX = 10 mm**	**Ø DCX = 12 mm**	**Ø DCX = 12 mm**
			a_p = 0,1–0,2	a_p = 0,2–0,3	a_p = 0,1–0,2	a_p = 0,2–0,3	a_p = 0,1–0,2	a_p = 0,2–0,3	a_p = 0,1–0,2	a_p = 0,2–0,3
Index	v_c m/min	v_c m/min	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
1.1	**250–300**	**150–250**	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
1.2	**250–300**	**150–250**	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
1.3	**250–300**	**150–250**	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
1.4	**200–250**	**180–200**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.5	**220–250**	**200–220**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.6	**220–250**	**200–220**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.7	**170–190**	**170–190**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.8	**160–180**	**160–180**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.9	**220–250**	**200–220**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.10	**170–190**	**170–190**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.11	**160–180**	**160–180**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.12	**170–190**	**170–190**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.13	**100–120**	**100–120**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.14	**80–100**	**80–100**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.15	**140–180**	**140–180**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
1.16	**140–180**	**140–180**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.1	110–150	70–110	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.2	110–150	70–110	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.3	110–150	70–110	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.4	110–150	70–110	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.5	110–150	70–110	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.6	80–110	60–90	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
2.7	80–110	60–90	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
3.1	300–350	250–300	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
3.2	180–250	180–250	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
3.3	200–250	150–200	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
3.4	200–250	150–200	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
3.5	200–250	150–200	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
3.6	200–250	150–200	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
3.7	200–250	150–200	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
3.8	200–250	150–200	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
4.1	400–600	400–600	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.2	400–600	400–600	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.3	400–600	400–600	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.4	400–600	400–600	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.5	400–600	400–600	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.6	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.7	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.8	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.9	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.10	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.11	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.12	300–500	300–500	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
4.13										
4.14										
4.15										
4.16										
4.17										
4.18										
4.19										
5.1										
5.2										
5.3										
5.4	50–80	30–50	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
5.5										
5.6										
5.7	50–80	30–50	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
5.8										
5.9										
5.10	60–80	60–80	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
5.11	40–80	40–80	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
6.1	**160–190**	**160–190**	0,1–0,22	0,22–0,35	0,1–0,3	0,3–0,5	0,1–0,4	0,4–0,7	0,1–0,45	0,45–0,8
6.2	**150–180**	**80–120**	0,1–0,22	0,22–0,35	0,1–0,25	0,25–0,4	0,1–0,25	0,25–0,4	0,1–0,35	0,35–0,6
6.3	**120–150**	**80–100**	0,1–0,22	0,2–0,3	0,1–0,25	0,2–0,3	0,1–0,25	0,25–0,35	0,1–0,35	0,3–0,4
6.4	**80–110**	**60–90**	0,1–0,22	0,2–0,3	0,1–0,25	0,2–0,3	0,1–0,25	0,25–0,35	0,1–0,35	0,3–0,4
6.5										

The width of cut (a_e) in steel should be 60–95 % of the cutter diameter (Ø DC), with high-grade steels and for sticking materials 40 % of Ø DC maximum!

	TiAlN		● 1st choice		○ suitable
	Medium	Roughing			
	Ø DCX = 16 mm	Ø DCX = 16 mm			
	a_p = 0,1–0,25	a_p = 0,2–0,4			
Index	f_z mm	f_z mm	Emulsion	Compressed air	MMS
1.1	0,1–0,45	0,45–0,8		○	●
1.2	0,1–0,45	0,45–0,8		○	●
1.3	0,1–0,45	0,45–0,8		○	●
1.4	0,1–0,35	0,35–0,6		○	●
1.5	0,1–0,35	0,35–0,6		○	●
1.6	0,1–0,35	0,35–0,6		○	●
1.7	0,1–0,35	0,35–0,6		○	●
1.8	0,1–0,35	0,35–0,6		○	●
1.9	0,1–0,35	0,35–0,6		○	●
1.10	0,1–0,35	0,35–0,6		○	●
1.11	0,1–0,35	0,35–0,6		○	●
1.12	0,1–0,35	0,35–0,6		○	●
1.13	0,1–0,35	0,35–0,6		○	●
1.14	0,1–0,35	0,35–0,6		○	●
1.15	0,1–0,35	0,35–0,6		○	●
1.16	0,1–0,35	0,35–0,6		○	●
2.1	0,1–0,35	0,35–0,6	●		○
2.2	0,1–0,35	0,35–0,6	●		○
2.3	0,1–0,35	0,35–0,6	●		○
2.4	0,1–0,35	0,35–0,6	●		○
2.5	0,1–0,35	0,35–0,6	●		○
2.6	0,1–0,35	0,35–0,6	●		○
2.7	0,1–0,35	0,35–0,6	●		○
3.1	0,1–0,45	0,45–0,8		●	○
3.2	0,1–0,45	0,45–0,8		●	○
3.3	0,1–0,35	0,35–0,6		●	○
3.4	0,1–0,35	0,35–0,6		●	○
3.5	0,1–0,35	0,35–0,6		●	○
3.6	0,1–0,35	0,35–0,6		●	○
3.7	0,1–0,35	0,35–0,6		●	○
3.8	0,1–0,35	0,35–0,6		●	○
4.1	0,1–0,45	0,45–0,8	●		○
4.2	0,1–0,45	0,45–0,8	●		○
4.3	0,1–0,45	0,45–0,8	●		○
4.4	0,1–0,45	0,45–0,8	●		○
4.5	0,1–0,45	0,45–0,8	●		○
4.6	0,1–0,45	0,45–0,8	●		○
4.7	0,1–0,45	0,45–0,8	●		○
4.8	0,1–0,45	0,45–0,8	●		○
4.9	0,1–0,45	0,45–0,8	●		○
4.10	0,1–0,45	0,45–0,8	●		○
4.11	0,1–0,45	0,45–0,8	●		○
4.12	0,1–0,45	0,45–0,8	●		○
4.13					
4.14					
4.15					
4.16					
4.17					
4.18					
4.19					
5.1					
5.2					
5.3					
5.4	0,1–0,45	0,45–0,8	○		●
5.5					
5.6					
5.7	0,1–0,45	0,45–0,8	○		●
5.8					
5.9					
5.10	0,1–0,45	0,45–0,8	○		●
5.11	0,1–0,45	0,45–0,8	○		●
6.1	0,1–0,45	0,45–0,8		●	○
6.2	0,1–0,35	0,35–0,6		●	○
6.3	0,1–0,35	0,35–0,45		●	○
6.4	0,1–0,35	0,35–0,45		●	○
6.5					

Cutting data – Cutters for plastic machining

	Suitable for:	Strength N/mm² – HB	50 981 …	50 982 …	50 983 …	50 984 …	50 985 …	50 986 …	50 987 …	50 988 …	50 932 …	50 937 …	50 936 …	50 938 …	50 610 …	50 611 …	52 76. …	50 91. …	50 946 …	50 948 …	50 947 …
4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm²													400–450			400–450			
4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm²													400–450			400–450			
4.3	Aluminium alloys 0.5–10 % Si	< 400 N/mm²													350–400			350–400			
4.4	Aluminium alloys 10–15 % Si	< 400 N/mm²												300–400					300–400	300–400	300–400
4.5	Aluminum alloys > 15 % Si	< 400 N/mm²												300–400					250–300	250–300	250–300
4.6	Copper (non alloyed, low alloyed)	< 350 N/mm²													400–450			400–450			
4.7	Wrought Copper Alloys	< 700 N/mm²												200–250					200–250	200–250	200–250
4.8	Special copper alloys	< 200 HB												200–250					200–250	200–250	200–250
4.9	Special copper alloys	< 300 HB												200–250					200–250	200–250	200–250
4.10	Special copper alloys	> 300 HB												200–250					200–250	200–250	200–250
4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm²													350–400			350–400			
4.12	Long-chipping brass	< 600 N/mm²													350–400			350–400			
4.13	Thermoplastics														500–550			500–550			
4.14	Duroplastics					300–350						300–350			500–550			500–550			
4.15	Fibre-reinforced plastics					150–200						150–200	500–600	150–200					150–200	150–200	150–200
4.16	Magnesium and magnesium alloys	< 850 N/mm²												250					250	250	250
4.17	Graphite					300–400						500–600	500–600	300–400				300	300–400		300–400
4.18	Tungsten and tungsten alloys																			200–250	250–300
4.19	Molybdenum and molybdenum alloys																			200–250	250–300

	Plastics, Thermoset, Hardwood, Pressed Cardboard					Plastic, Thermoplast, Polycarbonate, Non-ferrous metal, Hard rubber				
	End milling cutter Type W			Ball nosed cutter Type W		End milling cutter Type W			Ball nosed cutter Type W	
	Shoulder milling, trimming		Slot milling	Copy milling – Line milling		Shoulder milling, trimming		Slot milling	Copy milling – Line milling	
	Roughing	Finishing		Roughing	Finishing	Roughing	Finishing		Roughing	Finishing
	a_p = 1,0 x DC a_e = 0,4 x DC	a_p = 1,0 x DC a_e = 0,1 x DC		a_p = 0,5 x DC a_e = 0,5 x DC	a_p = 0,03 x DC a_e = 0,02 x DC	a_p = 1,5 x DC a_e = 0,8 x DC	a_p = 1,0 x DC a_e = 0,1 x DC		a_p = 0,5 x DC a_e = 0,5 x DC	a_p = 0,03 x DC a_e = 0,02 x DC
DC in mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm
2	0,024	0,018	0,016	0,028	0,024	0,024	0,022	0,017	0,037	0,03
3	0,036	0,027	0,024	0,042	0,036	0,036	0,033	0,026	0,056	0,045
4	0,048	0,036	0,032	0,056	0,048	0,048	0,044	0,034	0,074	0,06
5	0,060	0,045	0,04	0,07	0,06	0,060	0,055	0,043	0,093	0,075
6	0,072	0,054	0,048	0,084	0,072	0,072	0,066	0,051	0,111	0,09
8	0,10	0,07	0,06	0,11	0,10	0,10	0,09	0,07	0,15	0,12
10	0,12	0,09	0,08	0,14	0,12	0,12	0,11	0,09	0,19	0,15
12	0,14	0,11	0,10	0,17	0,14	0,14	0,13	0,10	0,22	0,18
14	0,17	0,13	0,11	0,20	0,17	0,17	0,15	0,12	0,26	0,21
16	0,19	0,14	0,13	0,22	0,19	0,19	0,18	0,14	0,30	0,24
18	0,22	0,16	0,14	0,25	0,22	0,22	0,20	0,15	0,33	0,27
20	0,24	0,18	0,16	0,28	0,24	0,24	0,22	0,17	0,37	0,30

	Fiber reinforced plastics AFK, CFK, GFK			
	End mill staggered teeth			
	Shoulder milling, trimming		Copy milling – Line milling	
	a_p = 1,0 x DC a_e = 0,05 x DC	a_p = 1,0 x DC a_e = 0,05 x DC	a_p = 0,35 x DC	a_p = 0,35 x DC
	fine	Medium	fine	Medium
DC in mm	f	f	f	f
2	0,16	0,14	0,14	0,12
3	0,24	0,21	0,21	0,18
4	0,32	0,28	0,28	0,24
5	0,40	0,35	0,35	0,30
6	0,48	0,42	0,42	0,36
8	0,64	0,56	0,56	0,48
10	0,80	0,70	0,70	0,60
12	0,96	0,84	0,84	0,72
16	1,28	1,12	1,12	0,96
20	1,60	1,40	1,40	1,20

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

Cutting data standard values – Circular saw blades

	Circular saws Solid carbide Fine	
Index	v_c m/min	f_z mm
1.1	100–160	0,005–0,01
1.2	100–160	0,005–0,01
1.3	100–160	0,005–0,01
1.4	80–130	0,003–0,007
1.5	80–130	0,003–0,007
1.6	80–130	0,003–0,007
1.7	100–160	0,005–0,01
1.8	50–100	0,003–0,007
1.9	80–130	0,003–0,007
1.10	80–130	0,003–0,007
1.11	50–100	0,003–0,007
1.12	50–100	0,003–0,007
1.13	50–100	0,003–0,007
1.14	50–100	0,003–0,007
1.15	50–100	0,003–0,007
1.16	50–100	0,003–0,007
2.1	80–130	0,003–0,007
2.2	80–130	0,003–0,007
2.3	80–130	0,003–0,007
2.4	50–100	0,003–0,007
2.5	80–130	0,003–0,007
2.6	100–160	0,003–0,007
2.7	50–100	0,003–0,007
3.1	80–130	0,003–0,007
3.2	50–100	0,003–0,007
3.3	50–100	0,003–0,007
3.4	50–100	0,003–0,007
3.5	80–130	0,003–0,007
3.6	80–130	0,003–0,007
3.7	80–130	0,003–0,007
3.8	50–100	0,003–0,007
4.1	200–500	0,005–0,01
4.2	200–500	0,005–0,01
4.3	200–500	0,005–0,01
4.4	200–450	0,005–0,01
4.5	200–450	0,005–0,01
4.6	200–450	0,005–0,01
4.7	150–300	0,005–0,01
4.8	150–300	0,005–0,01
4.9	150–300	0,005–0,01
4.10	150–300	0,005–0,01
4.11	200–400	0,005–0,01
4.12		
4.13	150–300	0,005–0,01
4.14	80–250	0,005–0,01
4.15		
4.16		
4.17		
4.18		
4.19		
5.1		
5.2	50–100	0,003–0,007
5.3	50–100	0,003–0,007
5.4	20–30	0,003–0,007
5.5	20–30	0,003–0,007
5.6	20–30	0,003–0,007
5.7	20–30	0,003–0,007
5.8	20–30	0,003–0,007
5.9	30–70	0,003–0,007
5.10	30–70	0,003–0,007
5.11	30–70	0,003–0,007
6.1	50–100	0,003–0,007
6.2		
6.3		
6.4		
6.5		

14

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting Speeds – Depending upon Coating

			TiCN		Ti400		● 1st choice		○ suitable	Ti1000 / Ti1002		● 1st choice		○ suitable
							Emulsion	Compressed air	MMS			Emulsion	Compressed air	MMS
Index	v_c m/min		v_c m/min		v_c m/min					v_c m/min				
1.1	90–110	130–160	110–130	160–200	90–130	140–200	●	○	○	150–170	220–240	○	●	○
1.2	90–110	130–160	110–130	160–200	90–130	140–200	●	○	○	150–170	220–240	○	●	○
1.3	90–110	130–160	110–130	160–200	90–130	140–200	●	○	○	150–170	220–240	○	●	○
1.4	70–90	100–130	90–110	120–160	80–100	100–150	●	○	○	120–140	170–200	○	●	○
1.5	80–100	120–140	100–120	150–170	90–110	100–160	●	○	○	130–150	180–220	○	●	○
1.6	50–60	70–90	60–80	80–110	60–70	80–110	●	○	○	70–100	100–140	○	●	○
1.7	70–90	100–130	90–110	120–160	80–100	140–160	●	○	○	120–140	170–200	○	●	○
1.8	40–60	60–80	50–70	70–100	50–70	70–100	●	○	○	60–80	90–120	○	●	○
1.9	60–70	80–100	70–80	100–120	70–90	100–140	●	○	○	80–100	120–150	○	●	○
1.10	50–60	70–90	60–80	80–110	60–80	70–110	●	○	○	70–100	100–140	○	●	○
1.11	40–50	60–70	50–60	70–85	50–70	70–90	●	○	○	60–80	90–120	○	●	○
1.12	50–60		60–80	80–110	60–70	70–100	●	○	○	70–100	100–140	○	●	○
1.13	30–40	40–60	30–50	50–70	40–50	60–80	●	○	○	60–70	80–100	○	●	○
1.14	10–20	15–30	15–30	20–40	20–40	30–40	●	○	○	25–35	40–50	○	●	○
1.15	30–50	40–70	30–60	50–80	40–60	70–100	●	○	○	60–80	80–120	○	●	○
1.16	25–40	40–60	30–50	50–70	40–60	70–100	●	○	○	50–80	70–110	○	●	○
2.1	40–50	60–70	50–60	70–80	50–60	70–100	●	○	○	60–80	90–120	●		○
2.2	40–50	60–70	50–60	70–80	40–50	60–80	●	○	○	60–80	90–120	●		○
2.3	30–40	40–50	30–40	50–60	40–50	50–90	●	○	○	50–70	80–100	●		○
2.4	20–30	30–40	25–35	40–50	25–35	40–70	●	○	○	40–60	60–80	●		○
2.5	30–40	40–50	30–40	50–60	40–50	70–100	●	○	○	50–70	80–100	●		○
2.6	40–50	60–70	50–60	70–80	50–60	80–110	●	○	○	70–80	100–120	●		○
2.7	20–30	30–40	25–35	40–50	20–30	50–90	●	○	○	40–60	60–80	●		○
3.1	60–80	90–120	70–100	110–140	70–90	100–130	●	○	○	100–110	140–160	○	●	○
3.2	60–70	80–100	70–90	100–120	60–80	90–120	●	○	○	80–100	120–140	○	●	○
3.3	60–70	80–100	70–90	100–120	70–90	100–130	●	○	○	80–100	120–140	○	●	○
3.4	50–60	70–90	60–80	80–110	60–80	90–120	●	○	○	70–80	100–120	○	●	○
3.5	60–80	90–120	80–100	110–150	70–90	100–130	●	○	○	100–110	140–160	○	●	○
3.6	60–80	90–120	80–100	110–150	60–80	90–120	●	○	○	100–110	140–160	○	●	○
3.7	60–70	80–100	70–90	100–120	70–90	100–130	●	○	○	80–100	120–140	○	●	○
3.8	50–60	70–90	60–80	90–110	60–80	90–120	●	○	○	70–80	100–120	○	●	○
4.1	<300	<400	<300	<450	280–320	250–350	●	○	○	180–350	250–500	●		○
4.2	<300	<400	<300	<450	280–320	220–320	●	○	○	180–350	250–500	●		○
4.3	130–180	200–250	170–210	240–300	220–270	200–300	●	○	○	140–200	200–300	●		○
4.4	100–120	140–170	120–140	170–200	170–200	200–250	●	○	○	110–130	160–180	●		○
4.5	40–60	60–80	50–70	70–90	120–180	150–200	●	○	○	50–70	80–100	●		○
4.6	150–180	210–260	180–210	250–310	100–130	120–180	●	○	○	180–210	250–300	●		○
4.7	110–150	160–200	130–170	190–240	100–130	140–200	●	○	○	130–170	180–240	●		○
4.8	140–180	200–250	170–210	240–300	120–160	160–220	●	○	○	160–200	220–280	●		○
4.9	120–160	170–230	140–180	210–270	120–160	160–220	●	○	○	140–180	200–250	●		○
4.10	80–120	120–150	100–140	150–180	120–160	160–220	●	○	○	100–140	150–200	●		○
4.11	160–200	230–280	180–210	280–330	100–130	120–200	●	○	○	180–210	250–300	●	○	○
4.12	120–160	170–230	140–180	210–270	100–130	120–200	●	○	○	140–180	200–250	●	○	○
4.13	40–60	60–90	40–70	70–100	70–90	90–120	●	○	○	40–70	60–100	○	●	○
4.14	50–70	70–100	60–80	80–120	120–180	150–220	●	○	○	60–80	80–120	○	●	○
4.15	30–50	40–70	40–60	50–80	50–70	70–110	●	○	○	40–60	60–80	○	●	○
4.16	150–180	220–260	180–210	270–310	170–200	170–250		●	○	180–210	250–300		●	○
4.17	70–100	100–140	80–120	120–170	100–120	130–180		●	○	80–120	120–180		●	○
4.18	50–60	60–80	60–70	70–100	60–80	80–100	●	○	○	60–70	80–100	○	●	○
4.19	50–70	70–90	60–80	80–110	60–80	80–100	●	○	○	60–80	90–120	○	●	○
5.1	15–25	20–35	35–50	50–70	30–50	50–70	●	○	○	40–60	60–80	●	○	○
5.2	10–20	15–30	25–35	40–50	25–40	40–60	●	○	○	30–40	40–60	●	○	○
5.3	15–25	20–35	30–40	40–60	40–60	50–80	●	○	○	35–50	50–70	●	○	○
5.4			30–50	50–60	30–50	50–70	●	○	○	40–60	60–80	●	○	○
5.5			25–35	40–50	30–40	40–60	●	○	○	30–40	40–60	●	○	○
5.6			10–20	30–40	30–40	40–60	●	○	○	20–30	30–40	●	○	○
5.7			20–30	40–50	25–35	30–50	●	○	○	30–40	40–60	●	○	○
5.8			20–30	40–50	30–40	40–60	●	○	○	30–40	40–60	●	○	○
5.9	30–50	40–70	50–60	60–80	40–50	70–100	●	○	○	50–70	80–100	●	○	○
5.10	30–40	40–50	40–50	60–70	50–60	80–120	●	○	○	50–60	70–90	●	○	○
5.11			15–20	30–40	30–40	40–60	●	○	○	20–30	30–40	●	○	○
6.1							●	○	○	70–80	100–120		●	○
6.2							●	○	○	60–70	80–100		●	○
6.3							●	○	○	40–60	60–80		●	○
6.4							●	○	○	30–40	40–60		●	○
6.5							●	○	○	20–30	30–40		●	○

Index	Ti1001 v_c m/min		● 1st choice / ○ suitable: Emulsion	Compressed air	MMS	Ti10 / Ti20 v_c m/min		● 1st choice / ○ suitable: Emulsion	Compressed air	MMS
1.1										
1.2										
1.3										
1.4										
1.5										
1.6										
1.7										
1.8										
1.9										
1.10										
1.11										
1.12										
1.13										
1.14										
1.15										
1.16										
2.1										
2.2										
2.3										
2.4										
2.5										
2.6										
2.7										
3.1										
3.2										
3.3										
3.4										
3.5										
3.6										
3.7										
3.8										
4.1	300–400	300–500	●		○	150–350	250–500	●		○
4.2	300–400	300–500	●		○	120–220	150–300	●		○
4.3	250–300	300–450	●		○	150–180	220–250	●		○
4.4	200–250	250–350	●		○	100–130	150–180	●		○
4.5	150–200	200–250	●		○					
4.6	220–280	250–330	●		○	120–150	170–220	●		○
4.7	180–220	200–280	●		○	140–150	200–220	●		○
4.8	160–200	180–250	●		○					
4.9	150–200	160–250	●		○					
4.10	140–200	150–250	●		○					
4.11						170–180	240–260	●		○
4.12						180–200	260–280	●		○
4.13						140–170	200–240	●		○
4.14						220–280	300–400	●		○
4.15						70–100	100–140	●		○
4.16						140–170	200–250		●	
4.17										
4.18										
4.19										
5.1										
5.2										
5.3										
5.4										
5.5										
5.6										
5.7										
5.8										
5.9							80–100	●		○
5.10										
5.11										
6.1										
6.2										
6.3										
6.4										
6.5										

Depths of Cut Reference Values – Milling Cutters – extra short – long

Index	$a_{p\,max.}$ x DC		Ø DC = 2,5 mm a_e 0,1–0,2 x DC f_z mm	Ø DC = 2,5 mm a_e 0,3–0,4 x DC f_z mm	Ø DC = 2,5 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 3 mm a_e 0,1–0,2 x DC f_z mm	Ø DC = 3 mm a_e 0,3–0,4 x DC f_z mm	Ø DC = 3 mm a_e 0,6–1,0 x DC f_z mm	$a_{p\,max.}$ x DC		Ø DC = 4 mm a_e 0,1–0,2 x DC f_z mm	Ø DC = 4 mm a_e 0,3–0,4 x DC f_z mm	Ø DC = 4 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 5 mm a_e 0,1–0,2 x DC f_z mm	Ø DC = 5 mm a_e 0,3–0,4 x DC f_z mm	Ø DC = 5 mm a_e 0,6–1,0 x DC f_z mm	Ø DC = 6 mm a_e 0,1–0,2 x DC f_z mm	Ø DC = 6 mm a_e 0,3–0,4 x DC f_z mm	Ø DC = 6 mm a_e 0,6–1,0 x DC f_z mm
1.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
1.2	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
1.3	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,041	0,027	0,020	0,054	0,035	0,026
1.4	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
1.5	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.6	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.7	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.8	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
1.9	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.10	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.11	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
1.12	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.13	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
1.14	1,0	0,4	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
1.15	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
1.16	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
2.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
2.2	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
2.3	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
2.4	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
2.5	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
2.6	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
2.7	1,0	0,5	0,011	0,007	0,005	0,016	0,010	0,008	1,5	1	0,021	0,014	0,010	0,028	0,018	0,014	0,035	0,023	0,017
3.1	1,0	0,5	0,020	0,013	0,010	0,029	0,019	0,014	1,5	1	0,039	0,026	0,019	0,052	0,034	0,025	0,064	0,042	0,031
3.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
3.3	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
3.4	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
3.5	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
3.6	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
3.7	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
3.8	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
4.1	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
4.2	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
4.3	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
4.4	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
4.5	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
4.6	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.7	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.8	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.9	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.10	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.11	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.12	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.13	1,0	0,5	0,040	0,026	0,019	0,058	0,038	0,028	1,5	1	0,078	0,051	0,038	0,103	0,068	0,050	0,128	0,084	0,062
4.14	1,0	0,5	0,044	0,029	0,021	0,064	0,042	0,031	1,5	1	0,086	0,057	0,042	0,114	0,074	0,055	0,141	0,092	0,068
4.15	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.16	1,0	0,5	0,026	0,017	0,012	0,038	0,025	0,018	1,5	1	0,051	0,033	0,025	0,067	0,044	0,033	0,083	0,054	0,040
4.17	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
4.18	1,0	0,5	0,016	0,010	0,008	0,023	0,015	0,011	1,5	1	0,031	0,021	0,015	0,041	0,027	0,020	0,051	0,034	0,025
4.19	1,0	0,5	0,012	0,008	0,006	0,017	0,011	0,008	1,5	1	0,024	0,015	0,011	0,031	0,020	0,015	0,038	0,025	0,019
5.1	0,7	0,3	0,017	0,011	0,008	0,024	0,016	0,012	1,0	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
5.2	0,7	0,3	0,017	0,011	0,008	0,024	0,016	0,012	1,0	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
5.3	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
5.4	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
5.5	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
5.6	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
5.7	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
5.8	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
5.9	0,7	0,3	0,017	0,011	0,008	0,024	0,016	0,012	1,0	1	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
5.10	0,7	0,3	0,018	0,012	0,009	0,026	0,017	0,013	1,0	1	0,035	0,023	0,017	0,046	0,030	0,023	0,058	0,038	0,028
5.11	0,7	0,3	0,018	0,012	0,009	0,026	0,017	0,013	1,0	1	0,035	0,023	0,017	0,046	0,030	0,023	0,058	0,038	0,028

	$a_{p\,max.}$	a_e : 0,1 x DC	a_e : 0,1 x DC	$a_{p\,max.}$	a_e : 0,1 x DC	a_e : 0,1 x DC	a_e : 0,1 x DC
6.1	0,5[1]	0,021	0,030	1,0[1]	0,041	0,054	0,067
6.2	0,5[1]	0,019	0,027	1,0[1]	0,037	0,049	0,061
6.3	0,5[1]	0,017	0,025	1,0[1]	0,034	0,045	0,056
6.4	0,5[1]	0,015	0,022	1,0[1]	0,030	0,040	0,050
6.5	0,5[1]	0,013	0,020	1,0[1]	0,026	0,035	0,043

Finishing cutter

$a_{p\,max.}$	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	$a_{p\,max.}$	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm
0,7				1,5	0,08*	0,09*	0,1*

[1] = Trimming and trochoidal slot milling

* = To improve the surface quality reduce the f_z

Cutting data for Micro-Mini cutters for milling with diameter < 2.5 mm → v_c/f_z Page 318–325

Index	Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 14 mm			Ø DC = 16 mm			Ø DC = 18 mm			Ø DC = 20–25 mm		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
1.1	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
1.2	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
1.3	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.4	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
1.5	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.6	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.7	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.8	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
1.9	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.10	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.11	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
1.12	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.13	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
1.14	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
1.15	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
1.16	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
2.1	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,04	0,11	0,07	0,05
2.2	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,04	0,11	0,07	0,05
2.3	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,04	0,11	0,07	0,05
2.4	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,04	0,11	0,07	0,05
2.5	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,04	0,11	0,07	0,05
2.6	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,04	0,11	0,07	0,05
2.7	0,05	0,03	0,02	0,06	0,04	0,03	0,06	0,04	0,03	0,08	0,04	0,03	0,09	0,06	0,04	0,09	0,06	0,04	0,11	0,07	0,05
3.1	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,06	0,14	0,08	0,06	0,16	0,10	0,07	0,17	0,11	0,08	0,20	0,13	0,08
3.2	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
3.3	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
3.4	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
3.5	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
3.6	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
3.7	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
3.8	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,14	0,09	0,06	0,15	0,10	0,07	0,17	0,11	0,07
4.1	0,12	0,08	0,06	0,15	0,10	0,07	0,16	0,10	0,08	0,20	0,11	0,08	0,22	0,15	0,10	0,24	0,16	0,11	0,27	0,18	0,12
4.2	0,12	0,08	0,06	0,15	0,10	0,07	0,16	0,10	0,08	0,20	0,11	0,08	0,22	0,15	0,10	0,24	0,16	0,11	0,27	0,18	0,12
4.3	0,12	0,08	0,06	0,15	0,10	0,07	0,16	0,10	0,08	0,20	0,11	0,08	0,22	0,15	0,10	0,24	0,16	0,11	0,27	0,18	0,12
4.4	0,12	0,08	0,06	0,15	0,10	0,07	0,16	0,10	0,08	0,20	0,11	0,08	0,22	0,15	0,10	0,24	0,16	0,11	0,27	0,18	0,12
4.5	0,12	0,08	0,06	0,15	0,10	0,07	0,16	0,10	0,08	0,20	0,11	0,08	0,22	0,15	0,10	0,24	0,16	0,11	0,27	0,18	0,12
4.6	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.7	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.8	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.9	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.10	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.11	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.12	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.13	0,17	0,11	0,08	0,21	0,14	0,10	0,23	0,15	0,11	0,28	0,16	0,12	0,32	0,21	0,14	0,35	0,23	0,15	0,39	0,26	0,17
4.14	0,18	0,12	0,09	0,23	0,15	0,11	0,25	0,16	0,12	0,31	0,18	0,13	0,35	0,23	0,15	0,38	0,25	0,17	0,43	0,28	0,19
4.15	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.16	0,11	0,07	0,05	0,13	0,09	0,07	0,15	0,10	0,07	0,18	0,11	0,08	0,21	0,13	0,09	0,23	0,15	0,10	0,25	0,17	0,11
4.17	0,08	0,05	0,04	0,10	0,07	0,05	0,11	0,07	0,05	0,13	0,08	0,06	0,15	0,10	0,07	0,17	0,11	0,07	0,19	0,12	0,08
4.18	0,07	0,04	0,03	0,08	0,05	0,04	0,09	0,06	0,04	0,11	0,07	0,05	0,13	0,08	0,05	0,14	0,09	0,06	0,16	0,10	0,07
4.19	0,05	0,03	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05
5.1	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
5.2	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
5.3	0,06	0,04	0,03	0,08	0,05	0,04	0,09	0,06	0,04	0,11	0,06	0,05	0,12	0,08	0,05	0,13	0,09	0,06	0,15	0,10	0,06
5.4	0,06	0,04	0,03	0,08	0,05	0,04	0,09	0,06	0,04	0,11	0,06	0,05	0,12	0,08	0,05	0,13	0,09	0,06	0,15	0,10	0,06
5.5	0,06	0,04	0,03	0,08	0,05	0,04	0,09	0,06	0,04	0,11	0,06	0,05	0,12	0,08	0,05	0,13	0,09	0,06	0,15	0,10	0,06
5.6	0,06	0,04	0,03	0,08	0,05	0,04	0,09	0,06	0,04	0,11	0,06	0,05	0,12	0,08	0,05	0,13	0,09	0,06	0,15	0,10	0,06
5.7	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
5.8	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,05	0,04	0,10	0,06	0,04	0,11	0,07	0,05	0,12	0,08	0,05	0,14	0,09	0,06
5.9	0,07	0,05	0,03	0,09	0,06	0,04	0,10	0,06	0,05	0,12	0,07	0,05	0,13	0,09	0,06	0,15	0,10	0,06	0,16	0,11	0,07
5.10	0,07	0,05	0,04	0,09	0,06	0,05	0,10	0,07	0,05	0,13	0,07	0,05	0,14	0,09	0,06	0,16	0,10	0,07	0,18	0,12	0,08
5.11	0,07	0,05	0,04	0,09	0,06	0,05	0,10	0,07	0,05	0,13	0,07	0,05	0,14	0,09	0,06	0,16	0,10	0,07	0,18	0,12	0,08
	a_e : 0,1 x DC			a_e : 0,1 x DC			a_e : 0,1 x DC			a_e : 0,1 x DC			a_e : 0,1 x DC			a_e : 0,1 x DC			a_e : 0,1 x DC		
6.1	0,09			0,11			0,12			0,13			0,15			0,16			0,18		
6.2	0,08			0,10			0,11			0,12			0,13			0,15			0,17		
6.3	0,07			0,09			0,10			0,11			0,12			0,14			0,15		
6.4	0,06			0,08			0,09			0,10			0,11			0,12			0,13		
6.5	0,06			0,07			0,08			0,08			0,10			0,11			0,12		
	Finishing cutter																				
	a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm		
	0,11*			0,13*			0,15*			0,17*			0,19*			0,21*			0,23*		

Plunging angle for ramping and helical milling: 3°

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

14

Depths of Cut Reference Values – Milling Cutters – extra long

		Ø DC = 2,5 mm		Ø DC = 3 mm			Ø DC = 4 mm		Ø DC = 5 mm		Ø DC = 6 mm		Ø DC = 8 mm		Ø DC = 10 mm	
		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
Index	$a_{p\,max.}$ x DC	f_z mm		f_z mm		$a_{p\,max.}$ x DC	f_z mm		f_z mm		f_z mm		f_z mm		f_z mm	
1.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
1.2	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
1.3	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,052	0,034	0,049	0,032	0,07	0,04	0,08	0,05
1.4	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
1.5	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.6	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.7	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.8	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
1.9	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.10	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.11	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
1.12	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.13	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
1.14	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
1.15	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
1.16	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
2.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,04	0,03	0,05	0,04
2.2	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,04	0,03	0,05	0,04
2.3	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,04	0,03	0,05	0,04
2.4	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,04	0,03	0,05	0,04
2.5	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,04	0,03	0,05	0,04
2.6	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,04	0,03	0,05	0,04
2.7	0,6	0,008	0,005	0,016	0,010	1,0	0,021	0,014	0,026	0,017	0,031	0,021	0,04	0,03	0,05	0,03
3.1	0,6	0,015	0,010	0,029	0,019	1,0	0,039	0,025	0,048	0,032	0,058	0,038	0,08	0,05	0,10	0,06
3.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
3.3	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
3.4	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
3.5	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
3.6	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
3.7	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
3.8	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,07	0,04	0,08	0,06
4.1	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,11	0,07	0,14	0,09
4.2	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,11	0,07	0,14	0,09
4.3	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,11	0,07	0,14	0,09
4.4	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,11	0,07	0,14	0,09
4.5	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,11	0,07	0,14	0,09
4.6	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.7	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.8	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.9	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.10	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.11	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.12	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.13	0,6	0,031	0,020	0,058	0,038	1,0	0,077	0,051	0,097	0,063	0,116	0,076	0,16	0,10	0,19	0,13
4.14	0,6	0,034	0,022	0,064	0,042	1,0	0,085	0,056	0,107	0,070	0,128	0,084	0,17	0,11	0,21	0,14
4.15	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.16	0,6	0,020	0,013	0,038	0,025	1,0	0,050	0,033	0,063	0,041	0,076	0,049	0,10	0,07	0,13	0,08
4.17	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,07	0,05	0,09	0,06
4.18	0,6	0,012	0,008	0,023	0,015	1,0	0,031	0,020	0,039	0,025	0,046	0,030	0,06	0,04	0,08	0,05
4.19	0,6	0,009	0,006	0,017	0,011	1,0	0,023	0,015	0,029	0,019	0,035	0,023	0,05	0,03	0,06	0,04
5.1	0,3	0,013	0,009	0,024	0,016	0,5	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
5.2	0,3	0,013	0,009	0,024	0,016	0,5	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
5.3	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,06	0,04	0,07	0,05
5.4	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,06	0,04	0,07	0,05
5.5	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,06	0,04	0,07	0,05
5.6	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,06	0,04	0,07	0,05
5.7	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
5.8	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,05	0,04	0,07	0,04
5.9	0,3	0,013	0,009	0,024	0,016	0,5	0,033	0,021	0,041	0,027	0,049	0,032	0,07	0,04	0,08	0,05
5.10	0,3	0,014	0,009	0,026	0,017	0,5	0,035	0,023	0,044	0,029	0,052	0,034	0,07	0,05	0,09	0,06
5.11	0,3	0,014	0,009	0,026	0,017	0,5	0,035	0,023	0,044	0,029	0,052	0,034	0,07	0,05	0,09	0,06
	$a_{p\,max.}$	a_e : 0,1 x DC		a_e : 0,1 x DC		$a_{p\,max.}$	a_e : 0,1 x DC		a_e : 0,1 x DC		a_e : 0,1 x DC		a_e : 0,1 x DC		a_e : 0,1 x DC	
6.1	0,3[1]	0,013		0,024		0,5[1]	0,033		0,041		0,049		0,07		0,08	
6.2	0,3[1]	0,012		0,022		0,5[1]	0,029		0,037		0,044		0,06		0,07	
6.3	0,3[1]	0,011		0,020		0,5[1]	0,027		0,034		0,041		0,05		0,07	
6.4	0,3[1]	0,010		0,018		0,5[1]	0,024		0,030		0,036		0,05		0,06	
6.5	0,3[1]	0,008		0,016		0,5[1]	0,021		0,026		0,031		0,04		0,05	

Finishing cutter

$a_{p\,max.}$				$a_{p\,max.}$	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm
0,6				1,5	0,08*	0,09*	0,1*	0,11*	0,13*

[1] = Trimming and trochoidal slot milling

* = With an a_p of 1.5 x DC the f_z should be multiplied by 0.75

Cutting data for Micro-Mini cutters for milling with diameter < 2.5 mm

→ v_c/f_z Page 318–325

Index	Ø DC = 12 mm		Ø DC = 14 mm		Ø DC = 16 mm		Ø DC = 18 mm		Ø DC = 20–25 mm	
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	f_z mm		f_z mm		f_z mm		f_z mm		f_z mm	
1.1	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
1.2	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
1.3	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.4	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
1.5	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.6	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.7	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.8	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
1.9	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.10	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.11	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
1.12	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.13	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
1.14	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
1.15	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
1.16	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
2.1	0,06	0,04	0,07	0,04	0,07	0,05	0,08	0,05	0,09	0,06
2.2	0,06	0,04	0,07	0,04	0,07	0,05	0,08	0,05	0,09	0,06
2.3	0,06	0,04	0,07	0,04	0,07	0,05	0,08	0,05	0,09	0,06
2.4	0,06	0,04	0,07	0,04	0,07	0,05	0,08	0,05	0,09	0,06
2.5	0,06	0,04	0,07	0,04	0,07	0,05	0,08	0,05	0,09	0,06
2.6	0,06	0,04	0,07	0,04	0,07	0,05	0,08	0,05	0,09	0,06
2.7	0,06	0,04	0,06	0,04	0,07	0,05	0,08	0,05	0,09	0,06
3.1	0,11	0,07	0,12	0,08	0,13	0,09	0,15	0,10	0,16	0,11
3.2	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
3.3	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
3.4	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
3.5	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
3.6	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
3.7	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
3.8	0,09	0,06	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09
4.1	0,15	0,10	0,16	0,11	0,18	0,12	0,20	0,13	0,23	0,15
4.2	0,15	0,10	0,16	0,11	0,18	0,12	0,20	0,13	0,23	0,15
4.3	0,15	0,10	0,16	0,11	0,18	0,12	0,20	0,13	0,23	0,15
4.4	0,15	0,10	0,16	0,11	0,18	0,12	0,20	0,13	0,23	0,15
4.5	0,15	0,10	0,16	0,11	0,18	0,12	0,20	0,13	0,23	0,15
4.6	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.7	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.8	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.9	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.10	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.11	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.12	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.13	0,21	0,14	0,23	0,15	0,26	0,17	0,29	0,19	0,33	0,21
4.14	0,23	0,15	0,26	0,17	0,29	0,19	0,32	0,21	0,36	0,23
4.15	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.16	0,14	0,09	0,15	0,10	0,17	0,11	0,19	0,12	0,21	0,14
4.17	0,10	0,07	0,11	0,07	0,13	0,08	0,14	0,09	0,16	0,10
4.18	0,09	0,06	0,09	0,06	0,11	0,07	0,12	0,08	0,13	0,09
4.19	0,06	0,04	0,07	0,05	0,08	0,05	0,09	0,06	0,10	0,06
5.1	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
5.2	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
5.3	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,07	0,12	0,08
5.4	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,07	0,12	0,08
5.5	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,07	0,12	0,08
5.6	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,07	0,12	0,08
5.7	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
5.8	0,08	0,05	0,08	0,05	0,09	0,06	0,10	0,07	0,11	0,08
5.9	0,09	0,06	0,10	0,06	0,11	0,07	0,12	0,08	0,14	0,09
5.10	0,10	0,06	0,11	0,07	0,12	0,08	0,13	0,09	0,15	0,10
5.11	0,10	0,06	0,11	0,07	0,12	0,08	0,13	0,09	0,15	0,10
	a_e : 0,1 x DC		a_e : 0,1 x DC		a_e : 0,1 x DC		a_e : 0,1 x DC		a_e : 0,1 x DC	
6.1	0,09		0,10		0,11		0,12		0,14	
6.2	0,08		0,09		0,10		0,11		0,12	
6.3	0,08		0,08		0,09		0,10		0,11	
6.4	0,07		0,07		0,08		0,09		0,10	
6.5	0,06		0,06		0,07		0,08		0,09	
	Finishing cutter									
	a_e : 0,2–0,3 mm		a_e : 0,2–0,3 mm		a_e : 0,2–0,3 mm		a_e : 0,2–0,3 mm		a_e : 0,2–0,3 mm	
	0,15*		0,17*		0,19*		0,21*		0,23*	

Plunging angle for ramping and helical milling: 3°

Feed rate guide values for ball nosed and torus cutters on → **Page 356**

14

Feedrate for machining in steel, iron and non-ferrous materials with torus and ball nosed end mills

Ball nose end milling cutters



Ball nosed and torus cutters



Torus end milling cutters



Ø DC mm	f_z mm	f_z mm	f_z mm
2	0,015	0,010	0,010
3	0,030	0,020	0,015
4	0,040	0,030	0,020
5	0,060	0,050	0,030
6	0,070	0,060	0,050
8	0,100	0,080	0,070
10	0,120	0,100	0,080
12	0,150	0,120	0,100
16	0,180	0,150	0,120
18	0,200	0,180	0,140
20	0,220	0,200	0,150

The feed should be reduced by 10–20 % for uncoated tools.

Feedrates for the machining of hardened materials with Ti1000 coated torus and ball nosed cutters

Ball nosed and torus cutters

Hardness = 40–60 HRC
v_c = 80–120 m/min



Ball nosed and torus cutters

Hardness = 40–60 HRC
v_c = 80–120 m/min



Ø DC mm	f_z mm	f_z mm
2	0,005	0,005
3	0,015	0,010
4	0,030	0,015
5	0,050	0,020
6	0,060	0,030
8	0,070	0,035
10	0,080	0,040
12	0,080	0,050
16	0,100	0,080

Trochoidal milling

The trochoidal milling process means that large depths of cut with unstable or lower powered machines are possible.

Depending on the strength of the material, radial step over of between 5–20 % of the cutting diameter should be used. Since the trochoidal milling is only peripheral milling, the cutting forces are far less.

Advantages/Benefits

- Reduced tool wear
- Reduced cycle time
- Protection of the machine tool components
- Exploiting the full length of the cutting edge
- Reduced cutting pressure

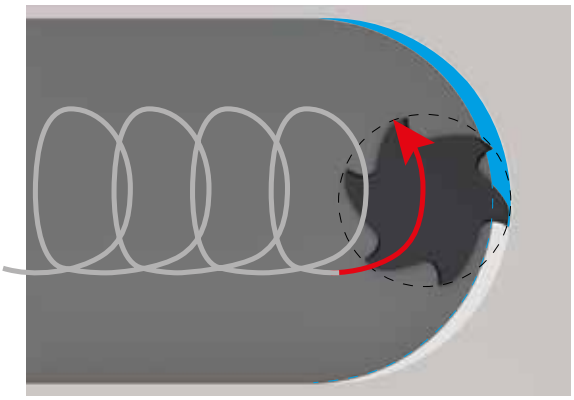

Most CAM providers offer an application for trochoidal milling. Our recommendations for this application are as follows:

Material	Depth of Cut	Radial Infeed	Feed rate Correction Factor	v_c Correction Factor
Steel	2xD	0,05xD	3,5	1,6
	2xD	0,10xD	2,5	1,3
Stainless steel	2xD	0,05xD	3,5	1,4
	2xD	0,10xD	2,5	1,2
Cast iron	2xD	0,05xD	3,5	1,6
	2xD	0,10xD	2,5	1,3
Non-ferrous metals	2xD	0,05xD	3,5	1,8
	2xD	0,10xD	2,5	1,4
	2xD	0,20xD	1,5	1,2

Please note that the indicated values may require reducing due to the component design, machine rigidity and machine dynamics. In optimal conditions, the values can also be increased.

14

Technical references

Feedrate Adjustment

If the rpm indicated in the tables cannot be obtained by the machine spindle, the feed rate is to be reduced proportionally to the max rpm.

Example:
according to table = n 50000 1/min. and v_f 1000 mm/min.,
maximum machine rpm = 40000 1/min.

Calculation of feed rate which can be applied:
40000 = 80 % of 50000 1/min. accordingly 80 % of 1000 = 800 mm/min.

Feed rate which can be applied = **800 mm/min.**

Cutting data for tapered milling cutters

Using tapered milling cutters in various positions of the cutting edge different effective diameters cut into the material, the following has to be observed when calculating the cutting parameters:

- To determine the rpm, the largest diameter must be used in line with the cutting data table
- To determine the feedrate, the smallest diameter must be used in line with the cutting data table

Angled ramping with solid carbide cutters

Angled ramping with solid carbide cutters is possible at an angle of 3° to 6° depending on the cutter type.
A protective edge chamfer or corner radius is an advantage.



General formula for calculating the cutting parameters

Designation	Abbreviation	Unit	Formula	Example	
Number of revolutions	**n**	**min^{-1}**	$n = \frac{v_c \times 1000}{DC \times \pi}$	v_c = 25 m/min DC = 20 mm	$n = \frac{25 \times 1000}{20 \times \pi}$ = 398 min^{-1}
Cutting speed	**v_c**	**m/min**	$v_c = \frac{DC \times \pi \times n}{1000}$	n = 400 min^{-1} DC = 20 mm	$v_c = \frac{20 \times \pi \times 400}{1000}$ = 25 m/min
Feed per tooth	**f_z**	**mm**	$f_z = \frac{v_f}{ZEFP \times n}$	v_f = 320 mm/min. n = 400 min^{-1} ZEFP = 4	$f_z = \frac{320}{4 \times 400}$ = 0,2 mm
Feed per revolution	**f**	**mm**	$f = f_z \times ZEFP$	f_z = 0,2 mm ZEFP = 4	f = 0,2 x 4 = 0,8 mm
Feed rate	**v_f**	**mm/min.**	$v_f = f_z \times ZEFP \times n$	f_z = 0,2 mm ZEFP = 4 n = 400 min^{-1}	v_f = 0,2 x 4 x 400 = 320 mm/min.
Average chip thickness	**h_m**	**mm**	$h_m = f_z \times \sqrt{\frac{a_e}{DC}}$	f_z = 0,2 mm a_e = 0,3 mm DC = 20 mm	h_m = 0,2 x $\sqrt{\frac{0,3}{20}}$ = 0,024 mm

ZEFP = Number of teeth
a_e = cutting width

Calculation of the feed rate on the midpoint path of the milling cutter (v_{fM})

Designation	Abbreviation	Unit	Formula	Example
Internal contour	**v_{fM}**	**mm/min.**	$V_{fM} = \frac{v_f \times (D - DC)}{D}$	
Outside profile	**v_{fM}**	**mm/min.**	$V_{fM} = \frac{v_f \times (D + DC)}{D}$	
Helical ramping	**v_{fM}**	**mm/min.**	$V_{fM} = \frac{n \times f_z \times ZEFP \times (D - D_C)}{D}$	

14

Tips for Tool Selection

Rake and helix angles combined with the coating are decisive factors for the operational area.

Characteristics	Benefits
Helix angle with slow spiral	
▲ For soft steels, non ferrous metals, etc.	▲ High edge stability
▲ For high material removal rates	▲ Low tendency to edge chipping
▲ For slot milling, pocket milling, rough milling	
Helix angle with quick spiral	
▲ For materials with high tensile strength	▲ Soft cut
▲ For low material removal rates	▲ Low cutting forces
▲ Typical for finishing processes	
Small rake angles are applied	
▲ For hard, brittle materials	▲ High edge stability
▲ For high material removal rates	▲ Low tendency to edge chipping
▲ For rough machining	
Large rake angles are applied	
▲ For soft materials	▲ Soft cut
▲ For low material removal rates	▲ Low cutting forces
▲ For finishing	▲ Favorable chip flow
	▲ Low tendency to stick

Correction factor for solid carbide milling cutters

Factors for cutting speed (v_c) and feed rate (f_z) in relation to the overhang length (LPR)

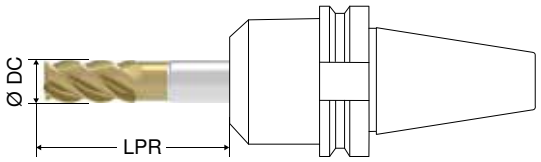

Length					
Overhang length (LPR)	1,5 x DC	4 x DC	8 x DC	12 x DC	> 12 x DC
Factor for v_c (Kf v_c)	1,0	1,0	0,9	0,85	0,7
Factor for f_z (Kf f_z)	1,2	1,0	0,8	0,7	0,5

Factors for cutting speed (v_c) and feed rate (f_z) in relation to the cutting depth (a_p) and cutting width (a_e)

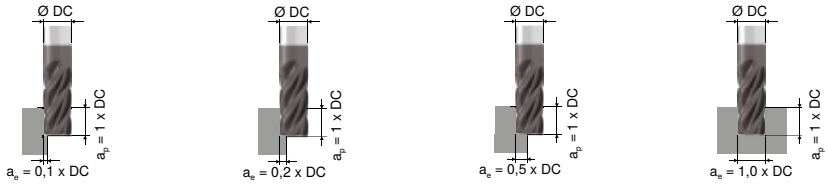

Factor for v_c (Kf v_c)	1,3	1,1	1,0	0,85
Factor for f_z (Kf f_z)	1,5	1,3	1,0	0,8

Calculation aid for copy milling

Theoretical surface roughness (R_{th}) and step over (b_r)

$$R_{th} = r - \sqrt{\frac{(r \times 2)^2 - b_r^2}{4}}$$

$$b_r = 2 \times \sqrt{R_{th} \times (r \times 2 - R_{th})}$$

$$R_{th} \simeq R_a / 0{,}1$$

$$R_a \simeq 0{,}1 \times R_{th}$$

When copy milling, in order to achieve as smooth a surface as possible, the step over b_r should be adapted to the cutter diameter DC. The smaller the cutter diameter DC is, the smaller the step over b_r must be.

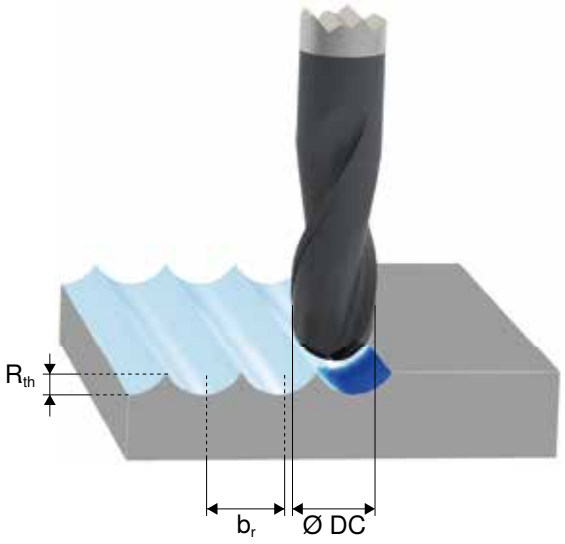

RPM correction factor (Kf n) for copy milling

$$n = \frac{v_c \times 1000}{DC \times \pi} \times Kf\,n$$

Rough machining

	Peripheral and ball nose copy milling	Ball nose copy milling	
			
Axial milling depth a_p	0,5 x DC	> 0,5 x DC	0,2 x DC – 0,5 x DC
Step over b_r	1 x DC	0,2 x DC – 0,5 x DC	0,2 x DC – 0,5 x DC
Correction factor (Kf n)	1	1	1,1

Finish milling

	Ball nose copy milling		
			
Axial milling depth a_p	< 0,2 x DC	0,2 x DC – 0,5 x DC	> 0,5 x DC
Step over b_r	< 0,2 x DC	< 0,2 x DC	< 0,2 x DC
Correction factor (Kf n)	2	1,3	1

14

Calculation aid for copy milling

For peripheral milling or ball nosed copy milling at cutting depths of $\mathbf{a_p} \geq 0.5 \times DC$ and $\mathbf{a_e} = 0.2$ to $0.5 \times DC$ the rpm can be calculated with the following fomula:

$$n = \frac{v_C \times 1000}{DC \times \pi}$$



When ball milling the effective milling diameter $\mathbf{d_{eff.}}$ must be determined using the following formula:

Ball nose milling cutters

$$d_{eff.} = 2 \times \sqrt{a_p \times (DC - a_p)}$$



$$d_{eff.} = DC \times \sin\left(\beta \pm \arccos\left(\frac{DC - 2a_p}{DC}\right)\right)$$



Torus end milling cutters

$$d_{eff.} = (DC - 2RE) + 2 \times \sqrt{a_p \times (2RE - a_p)}$$



Information concerning plunge and draw milling

① When machining the profile flanks relatively high feed rates are possible as the cutting depth is relatively low (area highlighted in blue).

② A large increase in cutting depth occurs when the base of the profile is reached. Here the feed rate must be reduced as othwerwise tool breakage can occur due to vibrations, misalignment or chattering.

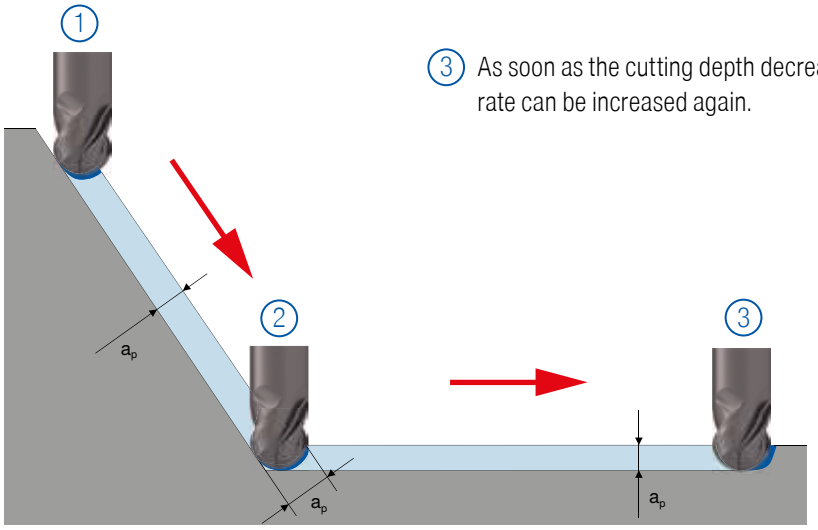

③ As soon as the cutting depth decreases during the machining of the profile base, the feed rate can be increased again.

Rule:
The steeper the angle, the lower the feed rate.
The shallower the angle, the larger the feed rate.

When plunge or draw milling dies, the feed rate has to be adapted to the various milling positions. Otherwise the cutting edge can be damaged due to overload (vibrations, misalignment or chattering).

Coatings

APA72S
- AlCrN multilayer coating
- HV0.05 = 3500
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1100 °C

APB72S
- Special nanolayer coating
- HV0.05 = 3300
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 900 °C

APX72S
- Special nanolayer coating
- HV0.05 = 3800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 1100 °C

DIA-MOND
- Diamond monolayer coating
- HV0.025 = 10,000
- Coefficient of friction (against steel) = 0.2
- Maximum application temperature: 700 °C

DLC
- Diamond-like carbon coating
- Specially for machining non-ferrous metals
- Maximum application temperature: 400 °C

DPX52S
- TiSiN multilayer coating
- HV0.05 = 3500
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 1000 °C

DPX62S
- TiAlN multilayer coating
- HV0.05 = 3800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 800 °C

DPX62U
- Special TiAlN coating
- HV0.05 = 4000
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1150 °C

DPA72S
- Special nanolayer coating
- HV0.05 = 3200
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1000 °C

DPX72S
- Special multilayer coating
- HV0.05 = 3400
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 900 °C

TiAlN
- TiAlN multilayer coating
- Maximum application temperature: 900 °C

TiCN
- TiCN multilayer coating
- Maximum application temperature: 450 °C

Ti28
- Ti multilayer coating
- HV0.05 = 2800
- Coefficient of friction (against steel) = 0.1
- Maximum application temperature: 500 °C

Ti40
- Ti monolayer coating
- HV0.05 = 4000
- Maximum application temperature: 900 °C

Ti400
- Ti multilayer coating
- HV0.05 = 3500
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 400 °C

Ti1000
- Ti monolayer coating
- HV0.05 = 3500
- Coefficient of friction (against steel) = 0.3
- Maximum application temperature: 800 °C

Ti1001
- Ti monolayer coating
- HV0.05 = 3500
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 800 °C

Ti1002
- Ti monolayer coating
- HV0.05 = 3300
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 900 °C

Ti1005
- Ti multilayer coating
- HV0.05 = 2800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 600 °C

Ti1010
- Ti multilayer coating
- HV0.05 = 3600
- Coefficient of friction (against steel) = 0.2
- Maximum application temperature: 800 °C

Ti1050
- Ti multilayer coating
- HV0.005 = 3300
- Coefficient of friction (against steel) = 0.3-0.5
- Maximum application temperature: 900 °C

Ti1100
- Ti multilayer coating
- HV0.05 = 3200
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1100 °C

Ti1200
- Ti nanolayer coating
- Maximum application temperature: 1100–1200 °C

Ti1500
- Ti nanolayer coating
- HV0.05 = 3400
- Coefficient of friction (against steel) = 0.7
- Maximum application temperature: 900 °C

Ti2000
- Ti multilayer coating
- HV0.05 = 3500
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 900 °C