

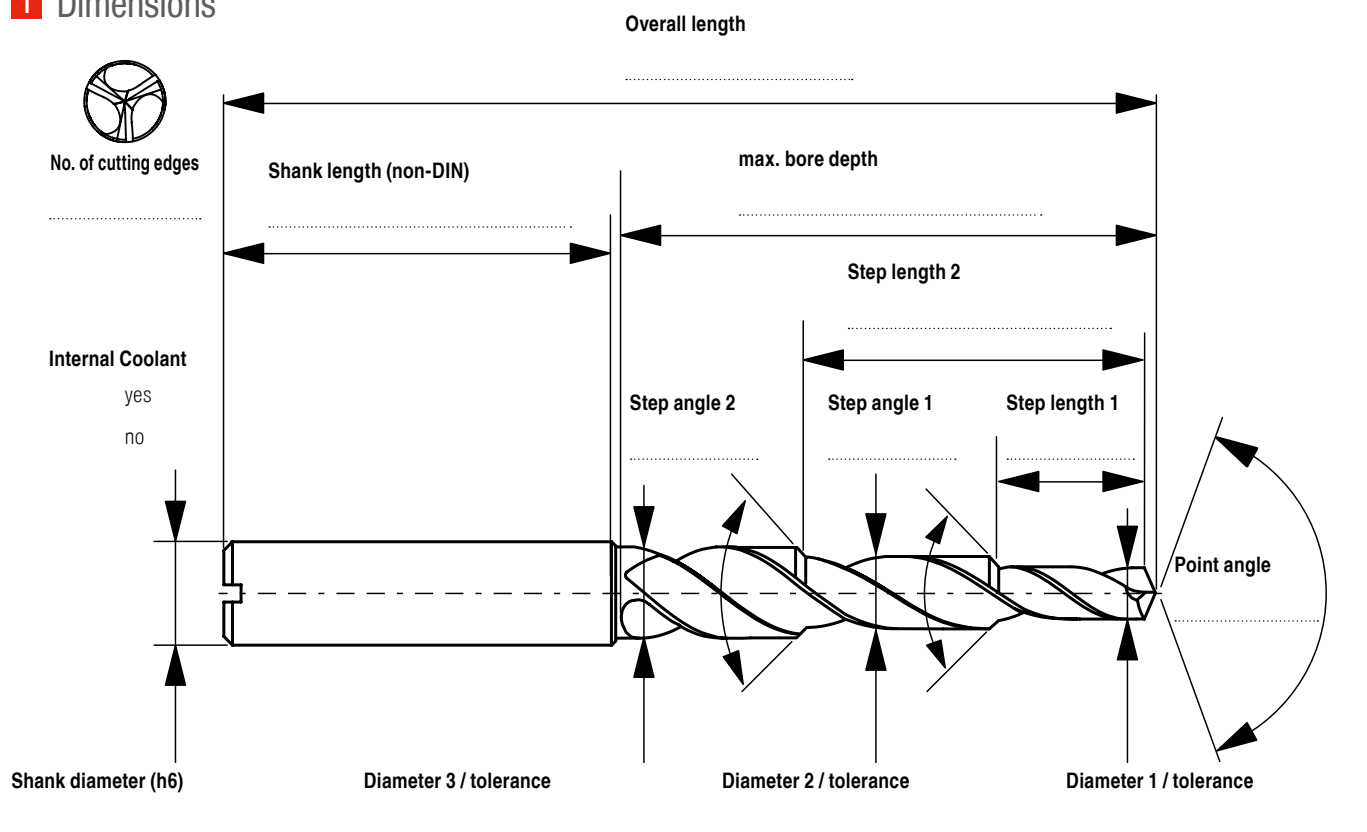
FORM

Request for special tools
Solid carbide drill – two-step

Please send the completed form to tech.scandinavia@ceratizit.com!

Company:	Department:
Technical Sales Engineer:	Contact:
Customer no.:	Contact Tel. No.:
Your reference:	Contact E-Mail:

1 Dimensions



Overall length

No. of cutting edges

Shank length (non-DIN)

max. bore depth

Step length 2

Step angle 2

Step angle 1

Step length 1

Point angle

Internal Coolant
yes
no

Shank diameter (h6)

Diameter 3 / tolerance

Diameter 2 / tolerance

Diameter 1 / tolerance



2 Coolant

Emulsion Oil Air without
Minimum quantity lubrication Coolant pressure bar

3 Shank Type

			Non-DIN (enter dimensions on drawing)
Plain shank (DIN 6535 HA)	Weldon (DIN 6535 HB)	Whistle notch (DIN 6535 HE)	

4 Type of machining

		Through hole	Blind hole
---	---	--------------	------------

5 Coating

uncoated

coated

6 Material Specification

Material number

Standard designation

Tensile strength in N/mm²/hardness (HRC, HB, etc.)**7** Comments**8** required number of pieces: Piece