

New products for machining technicians

NEW HPC solid carbide thread milling cutters



- ▲ Just one tool for countersink and thread

→ Page 58

NEW Drill thread milling cutter with chamfer facet



- ▲ Just one tool for core hole, countersink, thread and thread undercut

→ Page 54+55

NEW Micro thread milling cutter



- ▲ Specialist for the smallest threads in hard materials

→ Page 57


NEW Circular shank thread milling cutter



- ▲ Specialist for the machining of deep threads

→ Page 63



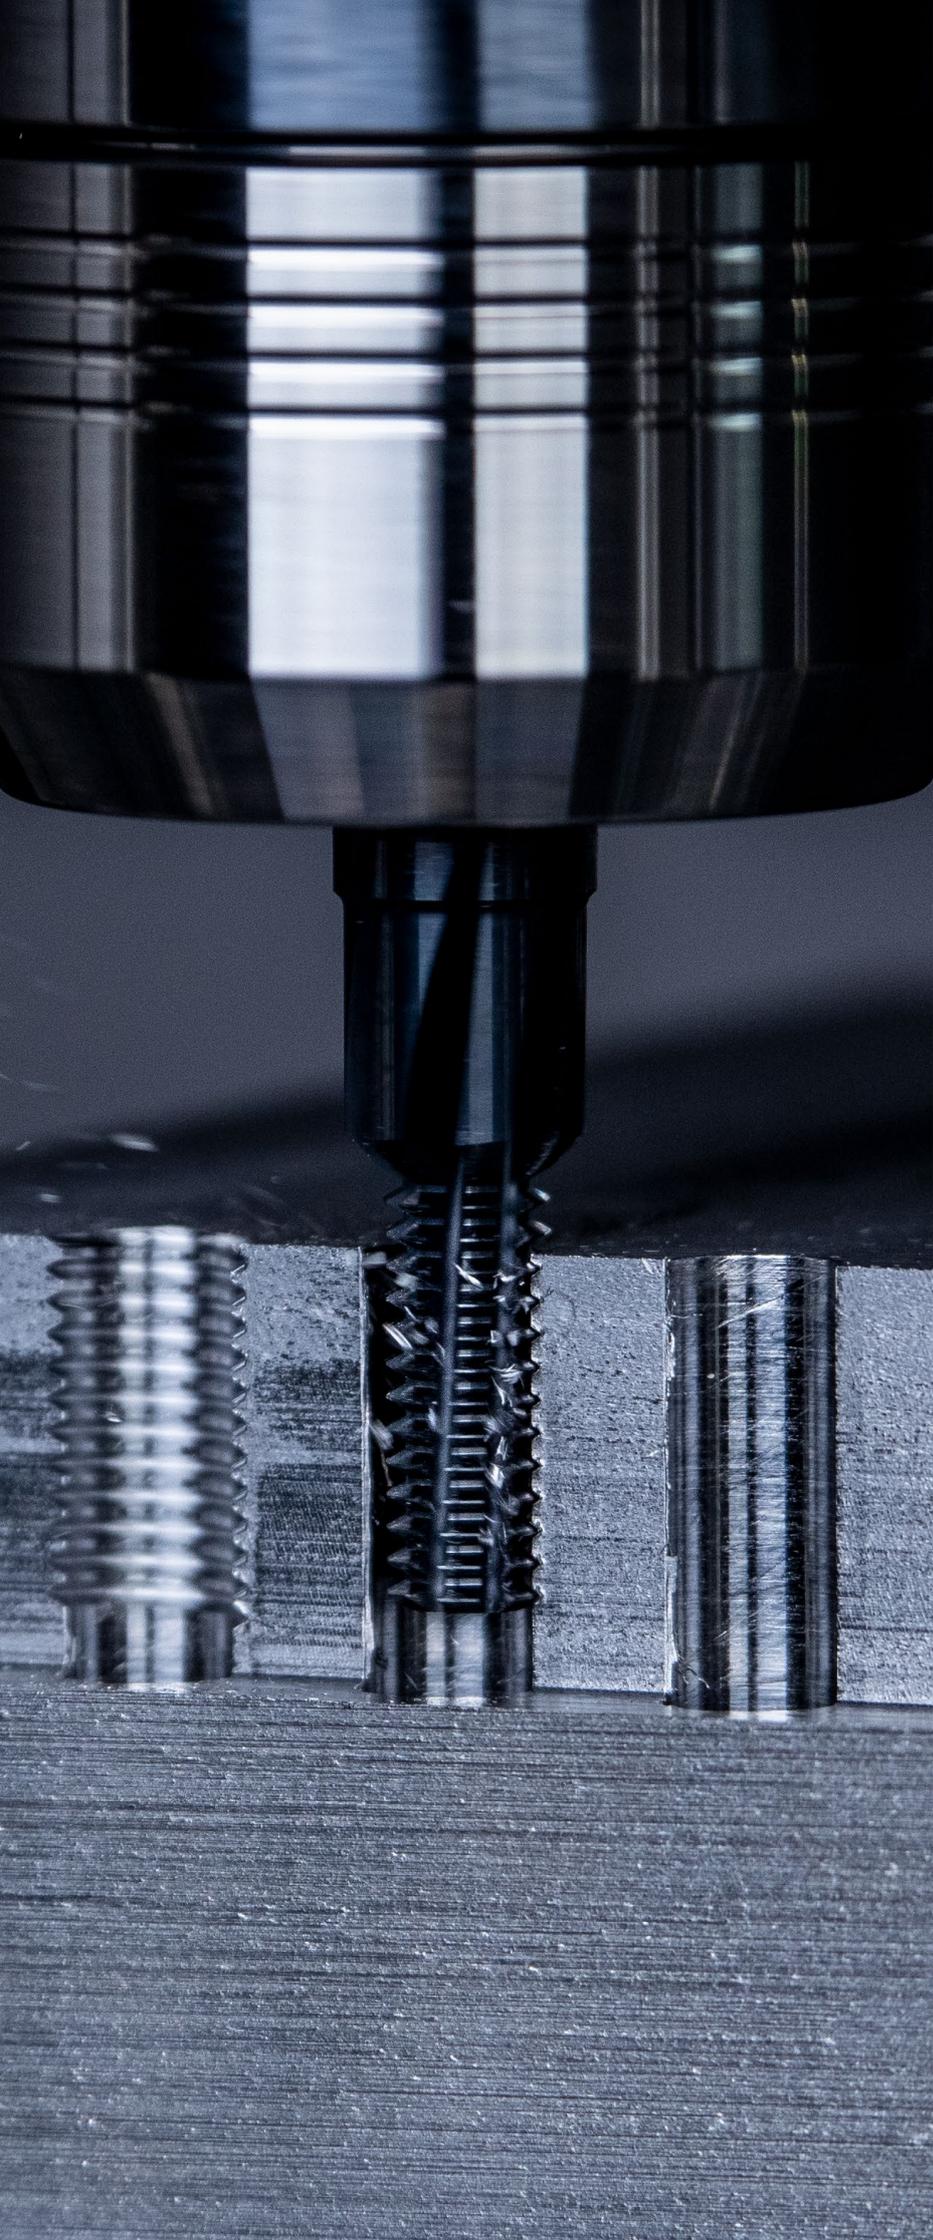

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools –
EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable
inserts

Catalogue –
Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and
article no. Index

Table of contents

Symbol explanation	2
Overview Circular and Thread Milling Cutters	3
Toolfinder	4+5
Product programme	6-69
Technical Information	
Cutting Data	70-76
Milling Procedures	77
Calculation of cutting data for thread milling	78
Internal thread production	78
Thread types/coatings	79

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Version

-  no drilling required
-  central internal coolant
-  lateral internal coolant
-  Coolant supply either via the flange or centrally
-  left-hand cutting

Shank



- = Main Application
- = Extended application



Thread / Flank angle



Explanation of the types of thread can be found on → **Page 79**.



Flank angle 60°

Applications



Circlip Grooves



Full radius slot milling



Slot milling



Multipurpose milling



Chamfering and Deburring



Gear milling



IR = internal right, IL = internal left



ER = external right, EL = external left



IR/IL + ER/EL

Tool types


EAW	Single-tooth thread milling cutter with carbide indexable inserts and Weldon flat	Polygon	Circular shank milling cutter with carbide indexable insert (polygon insert seat)
EWM	Single-tooth thread milling cutter with carbide indexable insert and SK adapter	SGF	Thread milling cutter
GZD	Multi-tooth thread milling cutter with carbide indexable inserts (angled insert seat) and Weldon flat	Micro Mill	Solid Carbide Circular End Milling Cutter
GZG	Multi-tooth thread milling cutter with carbide indexable inserts (straight insert seat) and Weldon flat	System 300	Circular milling cutter with solid carbide insert
SFSE	Thread milling cutter with chamfer facet	BGF	Solid carbide drill thread milling cutter
Mini Mill	Circular milling cutter with solid carbide milling insert (with three-rib insert connection)	ZBGF	Solid carbide circular drill thread milling cutter
MWN	Multi-tooth thread milling cutter with carbide indexable inserts (straight insert seat) and Weldon flat	SFSE Micro	Thread milling cutter for smallest threads

7

Overview Circular and Thread Milling Cutters

Modular Circular Milling Cutters with Carbide Indexable Inserts

- ▲ the perfect tool for every application
- ▲ various holders, depending on overhang
- ▲ the same threading insert for different pitches and diameters
- ▲ highest flexibility and stability
- ▲ in addition to circular thread milling, circular and linear milling operations can also be carried out

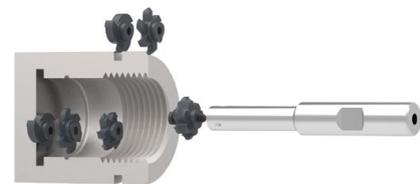

1st choice for small batch sizes and large threads

Thread Milling Cutters with Indexable Carbide Inserts

- ▲ exchange of the insert for different threads
- ▲ same threading insert for different diameters



Solid Carbide Thread Milling Cutters

- ▲ short machining times, ideal for volume production
- ▲ one tool for all thread types
- ▲ one thread milling cutter for different diameters with the same pitch



MicroMill



SGF



ZBGF



BGF

Toolfinder


				from bore diameter in mm
Modular Circular Milling Cutters with Carbide Indexable Inserts	Polygon		<ul style="list-style-type: none"> ▲ high power transmission through polygon connection ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel 	9,6
	Mini Mill		<ul style="list-style-type: none"> ▲ three interlocking rib location ▲ compatible with popular manufacturer systems ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel 	9,6
	System 300		<ul style="list-style-type: none"> ▲ proven circular milling tool ▲ 3 edged inserts 	7,9
Thread Milling Cutters with Indexable Carbide Inserts	MWN		<ul style="list-style-type: none"> ▲ multi tooth thread milling cutter ▲ double sided inserts ▲ exclusively for thread production ▲ holder for tapered threads 	9,0
	GZD		<ul style="list-style-type: none"> ▲ multi tooth drilling and thread milling cutter ▲ for thread milling in solid material ▲ core hole and thread with one tool 	14,0
	GZG		<ul style="list-style-type: none"> ▲ multi tooth thread milling cutter ▲ exclusively for thread production 	18,5
	EAW		<ul style="list-style-type: none"> ▲ single point thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for thread production ▲ insert holder with cylindrical shank DIN 1835 	17,5
	EWM		<ul style="list-style-type: none"> ▲ single point thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for thread production ▲ integral insert holder to DIN 69871 	43,0
Solid Carbide Thread Milling Cutters	Micro Mill		<ul style="list-style-type: none"> ▲ solid carbide circular milling cutter for small diameters 	1,25
	BGF		<ul style="list-style-type: none"> ▲ Drill thread milling cutter ▲ Core hole, countersink, thread and thread undercut with one tool 	2,45
	ZBGF		<ul style="list-style-type: none"> ▲ Circular drill thread milling cutter ▲ Core hole, countersink and thread with one tool 	2,3
	SFSE Micro		<ul style="list-style-type: none"> ▲ Solid carbide shank thread milling cutter with chamfer facet ▲ Just one tool for countersink and thread ▲ Specially developed for the smallest threads in hard materials 	0,75
	SFSE		<ul style="list-style-type: none"> ▲ solid carbide thread milling cutter with chamfering facet ▲ only one tool for threading and chamfering 	2,4
	SGF		<ul style="list-style-type: none"> ▲ solid carbide thread milling cutter without chamfering facet ▲ exclusively for thread production 	3,15

Thread / Flank angle								Applications						Tool holder
														
M	G	BSW	UN	UNC	Pg	NPT	Tr							
MF		BSF		UNF										
11+12	13	13		15			14	6+7	8+9	10	10	16+17	18	
26+27	28							19+20	21+22 23	22	24		25	29+30
34	35	35						31+32	33		33		36	
37	38		38		39	39							40+41	
42	42												43	
44	45		46		45								47	
48	48		48										49	
50	50		50										51	
53									52		52			
54+55														
56														
57														
58+59 61	59+61			62			60+62							
63+64 66+69	65+66			67+68										

7

 This article can be found in our online shop at cuttingtools.ceratizit.com

Milling inserts for circlip grooves without chamfer

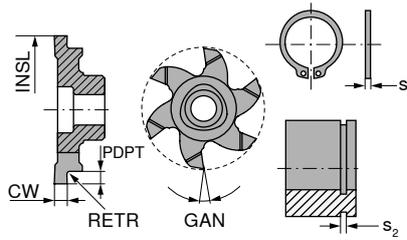

Ti500



Solid carbide

50 880 ...

Size	S ₂ H13 mm	INSL mm	CW _{-0.03} mm	PDPT mm	RETR mm	GAN °	s ₁ mm	NOF	EUR W2	
6	0,90	9,6	0,98	1,20	0,3	6	0,80	3	35,99	292
	1,10	11,7	1,18	1,00	0,3	6	1,00	3	34,25	294
	1,30	11,7	1,38	1,00	0,3	6	1,20	3	34,25	296
	1,60	11,7	1,68	1,00	0,3	6	1,50	3	34,25	298
7	1,10	16,0	1,18	0,90	0,3	6	1,00	6	47,68	301
	1,30	16,0	1,38	1,10	0,3	6	1,20	6	48,03	302
	1,60	16,0	1,68	1,25	0,3	6	1,50	6	48,03	304
	1,85	16,0	1,93	1,25	0,3	6	1,75	6	48,03	306
	1,10	17,7	1,18	0,90	0,3	6	1,00	6	48,50	308
	1,30	17,7	1,38	1,10	0,3	6	1,20	6	48,50	309
	1,60	17,7	1,68	1,25	0,3	6	1,50	6	48,50	310
	1,85	17,7	1,93	1,25	0,3	6	1,75	6	48,50	311
9	1,10	20,0	1,18	0,90	0,3	6	1,00	6	49,89	313
	1,30	20,0	1,38	1,10	0,3	6	1,20	6	49,89	314
	1,60	20,0	1,68	1,25	0,3	6	1,50	6	49,89	315
	1,85	20,0	1,93	1,25	0,3	6	1,75	6	49,89	316
	1,60	21,7	1,68	1,25	0,3	6	1,50	6	50,46	318
	1,85	21,7	1,93	1,25	0,3	6	1,75	6	50,46	319
	2,15	21,7	2,23	1,75	0,3	6	2,00	6	50,46	320
	2,65	21,7	2,73	1,75	0,3	6	2,50	6	50,46	321
10	1,30	26,0	1,38	1,10	0,3	6	1,20	6	52,31	322
	1,60	26,0	1,68	1,25	0,3	6	1,50	6	52,31	324
	1,85	26,0	1,93	1,25	0,3	6	1,75	6	52,31	326
	2,15	26,0	2,23	1,75	0,3	6	2,00	6	52,31	328
	2,65	26,0	2,73	1,75	0,3	6	2,20	6	52,31	330
	3,15	26,0	3,23	2,20	0,3	6	3,00	6	52,31	332

P	•
M	•
K	•
N	•
S	•
H	•
O	•


→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Milling inserts for circlip grooves with chamfer

▲ Both edges chamfered 0.1 x 45°

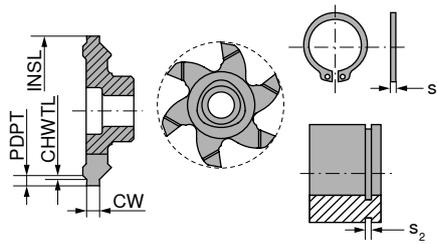

Ti500



Solid carbide

50 879 ...

Size	S ₂ H13 mm	INSL mm	CW _{-0.03} mm	PDPT mm	CHWTL mm	s ₁ mm	NOF	EUR W2	
7	1,10	16,0	1,18	0,50	0,10	1,00	6	51,04	292
	1,30	16,0	1,38	0,85	0,15	1,20	6	52,65	302
	1,60	16,0	1,68	1,00	0,15	1,50	6	52,65	304
	1,85	16,0	1,93	1,25	0,20	1,75	6	52,65	306
9	1,10	20,0	1,18	0,50	0,10	1,00	6	54,62	307
	1,30	20,0	1,38	0,85	0,15	1,20	6	54,62	308
	1,60	20,0	1,68	1,00	0,15	1,50	6	54,62	309
	1,60	21,7	1,68	1,00	0,15	1,50	6	54,62	312
	1,85	20,0	1,93	1,25	0,20	1,75	6	54,62	310
	1,85	21,7	1,93	1,25	0,20	1,75	6	54,62	314
	2,15	21,7	2,23	1,50	0,20	2,00	6	54,62	316
	2,65	21,7	2,73	1,75	0,20	2,50	6	54,62	318
10	1,30	26,0	1,38	0,85	0,15	1,20	6	56,82	322
	1,60	26,0	1,68	1,00	0,15	1,50	6	56,82	324
	1,85	26,0	1,93	1,25	0,20	1,75	6	56,82	326
	2,15	26,0	2,23	1,50	0,20	2,00	6	56,82	328
	2,65	26,0	2,73	1,75	0,20	2,50	6	56,82	330
	3,15	26,0	3,23	1,75	0,20	3,00	6	56,82	332

P	•
M	•
K	•
N	•
S	•
H	•
O	•


→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Milling insert without profile

- ▲ with double sided edge break of 0.1 x 45°
- ▲ Size 7: from 5.0 mm groove width with ground chip breaker
- ▲ Size 10: from 6.5 mm groove width with ground chip breaker

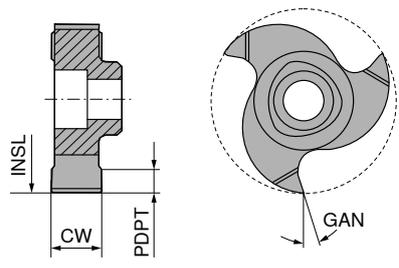

Ti500



Solid carbide

50 875 ...

Size	CW <small>+/-0,02</small> mm	INSL mm	PDPT mm	GAN °	NOF	EUR W2	
6	1,5	11,7	2,25	6	3	35,99	302
	2,0	11,7	2,25	6	3	35,99	304
	2,5	11,7	2,25	6	3	36,80	306
	3,0	11,7	2,25	6	3	36,80	308
7	3,5	16,0	3,50	0	3	40,15	310
	3,5	16,0	3,50	8	3	40,15	312
	3,5	16,0	3,50	12	3	40,15	314
	5,0	16,0	3,50	0	3	45,36	316
	5,0	16,0	3,50	8	3	45,36	318
	5,0	16,0	3,50	12	3	45,36	320
10	4,0	25,0	5,70	0	3	41,66	330
	4,0	25,0	5,70	8	3	41,66	332
	4,0	25,0	5,70	12	3	41,66	334
	5,0	25,0	5,70	8	3	48,60	337
	6,5	25,0	5,70	0	3	50,93	340
	6,5	25,0	5,70	8	3	50,93	342
	6,5	25,0	5,70	12	3	50,93	344
	8,0	25,0	5,70	0	3	56,48	350
	8,0	25,0	5,70	8	3	56,48	352
8,0	25,0	5,70	12	3	56,48	354	

P	•
M	•
K	•
N	•
S	•
H	•
O	•



→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Milling insert without profile

▲ Both edges chamfered 0.1 x 45°

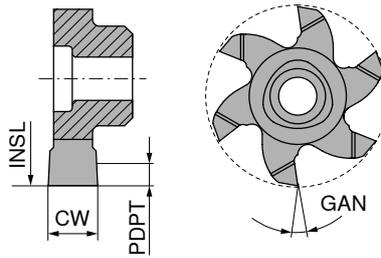

Ti500



Solid carbide

50 876 ...

Size	CW $\pm 0,02$ mm	INSL mm	PDPT mm	GAN °	NOF	EUR W2	
7	1,5	17,7	4,0	6	6	43,74	307
	2,0	17,7	4,0	6	6	43,97	308
	2,5	17,7	4,0	6	6	44,32	309
	3,0	16,0	3,5	6	6	50,22	302
	4,0	16,0	3,5	6	6	53,12	304
	5,0	16,0	3,5	6	6	54,75	306
9	1,5	21,7	5,0	6	6	50,46	314
	2,0	21,7	5,0	6	6	50,80	315
	2,5	21,7	5,0	6	6	50,80	316
	3,0	21,7	5,0	6	6	51,15	317
	3,0	20,0	4,2	6	6	51,15	311
	4,0	20,0	4,2	6	6	52,65	312
	5,0	20,0	4,2	6	6	55,66	313
10	1,5	27,7	6,8	6	6	62,15	330
	2,0	27,7	6,8	6	6	63,07	332
	2,5	27,7	6,8	6	6	63,07	334
	3,0	26,0	6,2	6	6	53,12	322
	3,0	27,7	6,8	6	6	63,99	336
	4,0	26,0	6,2	6	6	56,13	324
	5,0	26,0	6,2	6	6	56,36	326
	6,5	26,0	6,2	6	6	57,75	328
P							•
M							•
K							•
N							•
S							•
H							•
O							•


7

→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Milling inserts for radius milling

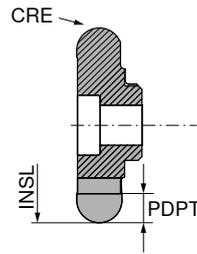

Solid carbide

50 886 ...


Size	CRE mm	INSL mm	PDPT mm	NOF
6	1,100	9,6	1,20	3
	0,788	11,7	2,25	3
	1,100	11,7	2,25	3
	1,190	11,7	2,25	3
7	0,788	17,7	4,20	6
	1,100	17,7	4,20	6
9	0,785	21,7	5,00	6
	1,000	21,7	5,00	6
	1,200	21,7	5,00	6
	1,400	21,7	5,00	6
	1,500	21,7	5,00	6

EUR	W2
37,71	702
37,71	704
37,71	708
37,71	706
47,66	712
47,66	714
57,45	720
57,45	722
57,45	724
57,45	726
57,45	728

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 73

Milling inserts for chamfering and deburring

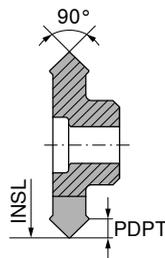

Solid carbide

50 884 ...

Size	PDPT mm	INSL mm	NOF
6	1,20	9,6	3
	1,50	11,7	3
7	1,90	16,0	6
	1,30	17,7	6
9	1,90	20,0	6
	1,95	21,7	6
10	2,10	26,0	6



EUR	W2
34,25	292
34,25	294
51,85	302
51,95	304
53,70	312
52,31	314
56,82	322

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 73

Thread milling insert – Partial profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!

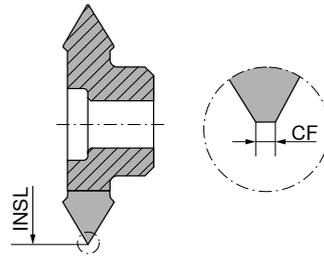

Ti500



Solid carbide

50 882 ...

Size	TP mm	INSL mm	CF mm	NOF	EUR	
6	1-3	11,7	0,10	3	49,65	292
7	1-3	17,7	0,10	6	55,66	306
	1-4	16,0	0,10	6	56,13	302
	2,5-4	16,0	0,25	6	55,66	304
9	1-2	21,7	0,10	6	56,58	314
	1-3	20,0	0,10	6	56,58	312
	2-4	21,7	0,15	6	56,58	316
10	1-3	26,0	0,10	6	60,29	322
	2,5-5	26,0	0,25	6	59,83	324
P						•
M						•
K						•
N						•
S						•
H						•
O						•



→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

7

Thread milling insert – Full profile

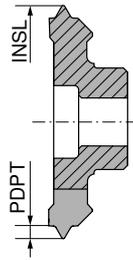

Ti500



Solid carbide

50 881 ...

Size	TP mm	INSL mm	PDPT mm	NOF	EUR W2	
6	1	9,6	0,572	3	60,52	292
	1,5	9,6	0,875	3	60,52	293
	2	10,5	1,157	3	60,52	296
7	1,5	16,0	0,875	6	69,32	302
	2	16,0	1,157	6	69,32	304
	2,5	16,0	1,430	6	69,32	306
	3	16,0	1,702	6	69,32	310
	M20x2,5	16,0	1,430	6	74,41	308 ¹⁾
9	1,5	20,0	0,875	6	71,05	312
	2	20,0	1,157	6	71,05	314
	M24x3	20,0	1,702	6	71,05	316 ¹⁾
10	1,5	26,0	0,875	6	73,83	322
	2	26,0	1,157	6	73,83	324
	3	26,0	1,702	6	73,83	330
	3,5	26,0	1,982	6	73,83	332
	4	26,0	2,263	6	73,83	334
	4,5	26,0	2,553	6	73,83	336
	5	26,0	2,836	6	73,14	337
	M30x3,5	24,0	1,982	6	73,14	331 ¹⁾
M36x4	26,0	2,263	6	73,14	335 ¹⁾	
P						•
M						•
K						•
N						•
S						•
H						•
O						•

1) profile corrected



→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling insert – Full profile

▲ 50 883 322 for threads > 1"

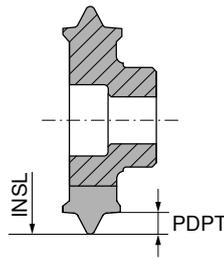

Ti500



Solid carbide

50 883 ...

Size	TPI 1/''	TP mm	INSL mm	PDPT mm	NOF	EUR	
6	19	1,337	9,6	0,871	3	60,52	292
7	14	1,814	17,7	1,177	6	67,59	308
	14	1,814	16,0	1,177	6	68,97	304
	11	2,309	16,0	1,494	6	69,32	302
	10	2,540	16,0	1,646	6	68,97	306
9	14	1,814	20,0	1,177	6	71,05	316
	11	2,309	20,0	1,494	6	71,05	314
10	11	2,309	26,0	1,494	6	73,83	322
P							●
M							●
K							●
N							●
S							●
H							●
O							●

→ v_c/f_z Page 73





When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{im} is used. Details on → **Page 77+78.**


7

Thread milling insert – Full profile

▲ DIN 103

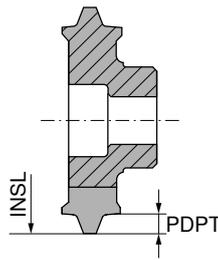

Ti500



Solid carbide

50 872 ...

Size	TP mm	INSL mm	PDPT mm	NOF	Thread	EUR	W2
6	2	11,7	1,25	3	Tr 16x2 - Tr 20x2	66,09	292
	3	11,0	1,75	3	Tr 18x3 - Tr 20x3	66,09	294
	4	12,0	2,25	3	Tr 20x4	66,09	296 ¹⁾
7	3	14,0	1,75	3	Tr 24x3 - Tr 32x3	90,13	302 ²⁾
	5	15,3	2,75	3	Tr 28x5 - Tr 36x5	90,13	306 ³⁾
	5	15,3	2,75	3	Tr 26x5	90,13	304 ³⁾
	6	16,2	3,50	3	Tr 34x6 - Tr 42x6	90,13	310 ²⁾
	6	16,2	3,50	3	Tr 30x6 - Tr 32x6	90,13	308 ²⁾
10	5	25,0	2,75	3	Tr 44x5 - Tr 48x5	114,10	322 ⁴⁾
	7	22,0	3,75	3	Tr 38x7 - Tr 42x7	114,10	324 ⁴⁾
	7	22,0	3,75	3	Tr 44x7	114,10	326 ¹⁾
	8	25,0	4,50	3	Tr 46x8 - Tr 48x8	132,20	328 ⁴⁾
	8	25,0	4,50	3	Tr 50x8 - Tr 52x8	132,20	330 ⁴⁾
	9	25,0	5,00	3	Tr 55x9 - Tr 60x9	132,20	332 ⁴⁾
	10	25,0	5,50	3	Tr 60x10 - Tr 80x10	132,20	334 ⁴⁾



P	●
M	●
K	●
N	●
S	●
H	●
O	●

- 1) profile corrected → v_c/f_z Page 73
- 2) Not suitable for the 50 805 011 and 50 805 010 holders
- 3) Not suitable for the 50 805 011 and 50 805 010 holders / profile corrected
- 4) Not suitable for the 50 805 026, 50 805 025 and 50 805 024 holders

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!

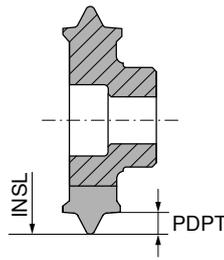

Ti500



Solid carbide

50 886 ...



Size	TPI 1/''	INSL mm	PDPT mm	NOF	EUR	
6	12,0	9,6	1,228	3	60,52	202
	11,0	10,5	1,355	3	60,52	204
	10,0	11,7	1,485	3	60,52	206
7	9,0	16,0	1,577	6	68,97	212
9	8,0	18,0	1,809	6	71,05	222
	7,0	20,0	2,043	6	71,05	224
10	6,0	24,0	2,454	6	73,14	232
	5,0	26,0	2,979	6	73,14	234
	4,5	26,0	3,289	6	73,14	236

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 73

Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!

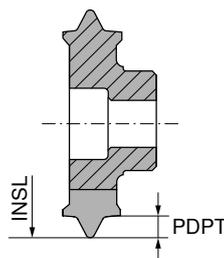

Ti500



Solid carbide

50 886 ...


Size	Thread	INSL mm	PDPT mm	NOF	EUR	
6	1/2 - 20	9,6	0,733	3	60,52	302
	9/16 - 18	10,5	0,827	3	60,52	304
	3/4 - 16	11,7	0,945	3	60,52	306
7	7/8 - 14	17,7	1,071	6	67,59	312
9	1 - 12	20,0	1,228	6	67,59	322

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 73

Gear cutters, DIN 5480

▲ Z_w = Tooth Number Wave

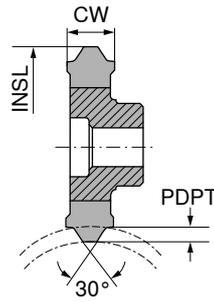

Ti500



Solid carbide


50 874 ...

Size	Wave	module	Z_w	CW mm	INSL mm	PDPT mm	NOF
7	W11	0,80	12	3	15,85	0,80	6
	W14	0,80	16	3	16,00	0,80	6
	W16	0,80	18	3	16,00	0,80	6
	W20	0,80	24	3	16,00	0,80	6
	W24	1,25	18	4	16,00	1,25	6
	W25	2,00	11	7	16,00	2,00	3
	W30	1,25	22	4	16,00	1,25	6
	W30	1,25	20	5	16,00	1,25	6
	W35	2,00	16	5	16,00	2,00	6
	W42	1,25	32	4	16,00	1,25	6
W50	2,00	24	5	16,00	2,00	6	

EUR	
W2	
92,00	011
92,00	014
92,00	016
92,00	020
99,17	024
113,50	025
99,17	031
99,17	030
102,10	035
99,17	042
102,10	050

Gear cutters, DIN 5481

▲ Z_w = Tooth Number Wave

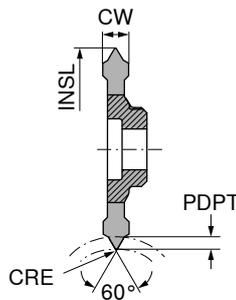

Ti500



Solid carbide

50 874 ...

Size	Wave	Z_w	CW mm	INSL mm	CRE mm	PDPT mm	NOF
10	26 x 30	35	3	26	0,3	1,638	6
	40 x 44	38	3	26	0,4	1,940	6

EUR	
W2	
92,00	126
92,00	140

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 73




When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 77+78.

Gear cutters, DIN 5482

▲ Z_w = Tooth Number Wave



Ti500

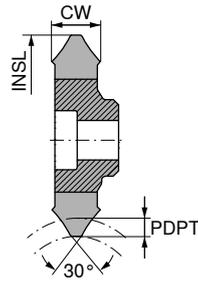

Solid carbide

50 874 ...

Size	Wave	module	Z_w	CW mm	INSL mm	PDPT mm	NOF	EUR	
7	15 x 12	1,60	8	3,0	16	1,50	6	102,10	215
	17 x 14	1,60	9	5,0	16	1,50	6	92,00	217
	20 x 17	1,60	12	5,0	16	1,50	6	92,00	220
	25 x 22	1,60	14	5,0	16	1,65	6	102,10	225
10	35 x 31	1,75	18	6,5	26	2,00	6	106,30	235
	55 x 50	2,00	26	6,5	26	2,75	6	106,30	255

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 73




When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

7

Circular milling cutter

- ▲ For maximum machining depth, note insert width (CW)
- ▲ Size 6 = for INSL 9.6; 10.5; 11.7; 12
- ▲ Size 7 = for INSL 16; 17.7
- ▲ Size 9 = for INSL 18; 20; 21.7
- ▲ Size 10 = for INSL 24; 25; 26; 27.7
- ▲ Holder available as screw-in variant in the online shop

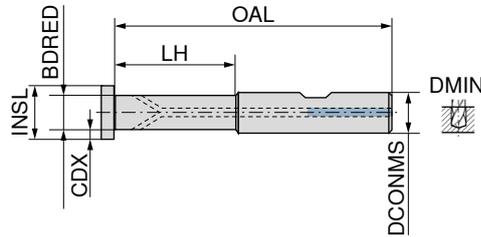

Size	LH mm	CDX mm	DCONMS _{n6} mm	OAL mm	BDRED mm	DMIN mm	torque moment Nm	50 805 ...	
								EUR W1	050 - 056
6	20,00	2,25	12	67,5	7,0	12	1,0		050 ¹⁾
	20,00	2,25	12	67,5	7,0	12	1,0		051
	20,00	2,25	12	67,5	7,0	12	1,0	231,50	052
	30,00	2,25	12	80,0	7,0	12	1,0		053
	30,00	2,25	12	80,0	7,0	12	1,0	242,60	054
	40,00	2,25	12	100,0	7,0	12	1,0		055
	40,00	2,25	12	100,0	7,0	12	1,0	262,60	056
7	20,90	4,00	12	67,4	9,0	18	1,1		002 ¹⁾
	21,00	4,00	12	67,4	9,0	18	1,1		004
	21,00	4,00	12	67,4	9,0	18	1,1	231,50	005
	36,00	4,00	12	82,4	9,0	18	1,1		008
	36,00	4,00	12	82,4	9,0	18	1,1	245,90	085
		4,00	12	122,5	12,0	18	1,1	289,30	010
	4,00	12	82,4	12,0	18	1,1	227,00	011	
9	29,75	5,00	16	80,0	11,5	22	3,8		070 ¹⁾
	30,00	5,00	16	80,0	11,5	22	3,8		071
	30,00	5,00	16	80,0	11,5	22	3,8	271,40	072
	50,00	5,00	16	100,0	11,5	22	3,8		073
	50,00	5,00	16	100,0	11,5	22	3,8	280,50	074
10	20,50	5,70	16	105,0	15,5	28	5,5	273,70	025
	20,50	6,80	16	149,7	15,5	28	5,5	390,60	024
	20,50	6,80	20	175,4	15,5	28	5,5	452,90	026
	30,40	6,80	16	79,6	13,6	28	5,5		012 ¹⁾
	30,50	6,80	16	79,6	13,6	28	5,5	271,40	015
	30,50	6,80	16	79,6	13,6	28	5,5		014
	45,50	6,80	16	94,6	13,6	28	5,5	280,50	021
	45,50	6,80	16	94,6	13,6	28	5,5		020
	60,50	6,80	16	109,6	13,6	28	5,5		022
	60,50	6,80	16	109,6	13,6	28	5,5	297,20	023

1) Steel version





Key D



Clamping screw

Spare parts Size	80 950 ...		70 960 ...	
	EUR Y7	125	EUR 2A	246
6	T08 - IP	10,51	M2,5x7	6,46
7	T08 - IP	10,51	M3x13	6,46
9	T15 - IP	12,25	M4x13	6,46
10	T20 - IP	12,92	M5x13,5	6,46

MiniMill – Milling insert for circlip grooves

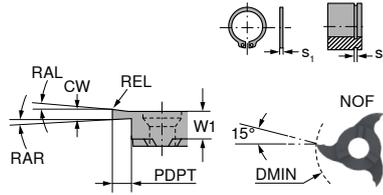

53 006 ...

Size	DMIN mm	S ₂ H13 mm	CW _{-0.02} mm	PDPT mm	W1 mm	RAR °	REL mm	s ₁ mm	NOF	EUR	
										W2	
10	10	0,70	0,74	1,5	3,50	1		0,60	3	35,07	070
	10	0,80	0,84	1,5	3,50	1		0,70	3	35,07	080
	10	0,90	0,94	1,5	3,50	1		0,80	3	35,07	090
	10	1,10	1,21	1,5	3,50	3		1,00	3	31,35	110
	10	1,30	1,41	1,5	3,50	3	0,10	1,20	3	31,35	130
	10	1,60	1,71	1,5	3,50	3	0,10	1,50	3	31,35	160
	10	1,10	1,21	2,5	3,50	3		1,00	3	31,35	112
	10	1,30	1,41	2,5	3,50	3	0,10	1,20	3	31,35	132
	10	1,60	1,71	2,5	3,50	3	0,10	1,50	3	31,35	162
18	18	0,70	0,74	1,5	5,75	1		0,60	3	35,76	270
	18	0,80	0,84	1,7	5,75	1		0,70	3	35,76	280
	18	0,90	0,94	1,9	5,75	1		0,80	3	35,76	290
	18	1,10	1,21	3,5	5,75	3		1,00	3	33,56	310
	18	1,30	1,41	3,5	5,75	3	0,10	1,20	3	33,56	330
	18	1,60	1,71	3,5	5,75	3	0,10	1,50	3	33,56	360
22	22	0,70	0,74	1,5	5,70	1		0,60	3	37,96	470
	22	0,80	0,84	1,7	5,70	1		0,70	3	37,25	480
	22	0,90	0,94	1,9	5,70	1		0,80	3	34,03	490
	22	1,00	1,04	2,1	5,70	1		0,90	3	35,99	500
	22	1,10	1,21	2,5	5,70	1		1,00	3	35,99	510
	22	1,30	1,41	4,5	5,70	3	0,10	1,20	3	34,25	530
	22	1,60	1,71	4,5	5,70	3	0,10	1,50	3	34,25	560
	22	1,85	1,96	4,5	5,70	3	0,15	1,75	3	34,25	585
	22	2,15	2,26	4,5	5,70	3	0,15	2,00	3	34,25	615
	22	2,65	2,76	4,5	5,70	3	0,15	2,50	3	34,25	665
	22	3,15	3,26	4,5	5,70	3	0,20	3,00	3	34,25	415
	22	4,15	4,26	4,5	5,70	3	0,20	4,00	3	34,25	515
	22	5,15	5,26	4,5	5,70	3	0,20	5,00	3	34,25	605




P	●
M	●
K	●
N	●
S	○
H	○
O	●

→ v_c/f_z Page 76



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for circlip grooves with chamfer facet

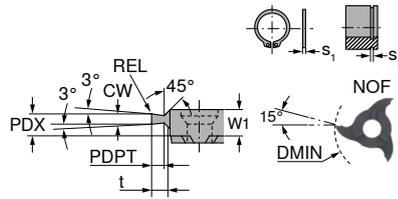

53 006 ...

Size	DMIN mm	s ₂ H13 mm	CW _{-0.02} mm	t mm	PDPT mm	W1 mm	PDX mm	REL mm	s ₁ mm	NOF	EUR	
											W2	
22	22	1,10	1,21	0,50	0,49	5,85	5,07		1,00	3	37,25	805
	22	1,30	1,41	0,70	0,67	5,85	5,17		1,20	3	37,25	807
	22	1,30	1,41	0,85	0,83	5,85	5,17		1,20	3	37,25	808
	22	1,60	1,71	0,85	0,83	5,85	5,07		1,50	3	37,25	809
	22	1,60	1,71	1,00	0,97	5,85	5,07		1,50	3	37,25	810
	22	1,85	1,96	1,25	1,23	5,85	5,19	0,15	1,75	3	37,25	812
	22	2,15	2,26	1,50	1,47	5,85	5,34	0,15	2,00	3	37,25	815
	22	2,65	2,76	1,75	1,72	5,85	5,09	0,15	2,50	3	37,25	817
	22	2,65	2,76	1,50	1,47	5,85	5,09	0,15	2,50	3	37,25	816
	22	3,15	3,26	1,75	1,72	5,85	5,34	0,20	3,00	3	37,25	818
	22	4,15	4,26	2,50	2,47	5,85	5,34	0,20	4,00	3	37,25	825
	22	4,15	4,26	2,00	1,97	5,85	5,34	0,20	4,00	3	37,25	820




P	●
M	●
K	●
N	●
S	○
H	○
O	●

→ v_c/f_z Page 76



When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for groove milling



53 007 ...



Size	DMIN mm	CW _{0.02} mm	PDPT mm	W1 mm	REL mm	NOF	EUR	
							W2	
10	10	1,0	1,5	3,50	0,1	3	35,07	010
	10	1,5	1,5	3,50	0,2	3	31,35	015
	10	2,0	1,5	3,50	0,2	3	31,35	020
	10	2,5	1,5	3,50	0,2	3	31,35	025
	12	1,5	2,0	3,50	0,2	6	54,27	114
	12	1,5	2,5	3,50	0,2	3	31,35	115
	12	2,0	2,0	3,50	0,2	6	54,27	119
	12	2,0	2,5	3,50	0,2	3	31,35	120
	12	2,5	2,5	3,50	0,2	3	31,35	125
14	14	1,0	2,5	4,50		3	35,76	210
	14	1,5	2,5	4,50	0,2	3	32,87	215
	14	2,0	2,5	4,50	0,2	3	32,87	220
	14	2,5	2,5	4,50	0,2	3	32,87	225
	16	1,5	3,5	4,50	0,2	3	32,87	315
	16	2,0	3,5	4,50	0,2	3	32,87	320
	16	2,5	3,5	4,50	0,2	3	32,87	325
18	18	1,5	3,5	5,75	0,1	6	61,45	414
	18	1,5	3,5	5,75	0,2	3	33,56	415
	18	2,0	3,5	5,75	0,2	6	61,45	419
	18	2,0	3,5	5,75	0,2	3	33,56	420
	18	2,5	3,5	5,75	0,2	6	61,45	424
	18	2,5	3,5	5,75	0,2	3	33,56	425
	18	3,0	3,5	5,75	0,2	6	61,45	429
	18	3,0	3,5	5,75	0,2	3	33,56	430
	18	4,0	3,5	5,75	0,2	3	33,56	440
22	22	1,0	4,5	6,20	0,1	6	60,18	810
	22	1,5	4,5	6,20	0,1	6	59,02	815
	22	1,5	4,5	5,70	0,2	3	35,07	515
	22	2,0	4,5	5,70	0,2	3	35,07	520
	22	2,0	4,5	6,20	0,2	6	59,02	820
	22	2,5	4,5	5,70	0,2	3	35,07	525
	22	2,5	4,5	6,20	0,2	6	59,02	825
	22	3,0	4,5	5,70	0,2	3	35,07	530
	22	3,0	4,5	6,20	0,2	6	59,02	830
	22	3,5	4,5	5,70	0,2	3	35,07	535
	22	4,0	4,5	5,70	0,2	3	35,07	540
	22	4,0	4,5	6,20	0,2	6	59,02	840
28	25	2,0	5,0	6,50	0,2	3	40,15	620
	25	2,5	5,0	6,50	0,2	3	40,15	625
	25	3,0	5,0	6,50	0,2	3	40,15	630
	25	3,5	5,0	6,50	0,2	3	40,15	635
	25	4,0	5,0	6,50	0,2	3	40,15	640
	28	1,0	6,5	6,25	0,1	6	66,90	610
	28	1,5	6,5	6,25	0,1	6	65,96	615
	28	1,5	6,5	6,50	0,2	3	40,15	715
	28	2,0	6,5	6,25	0,2	6	66,78	721
	28	2,0	6,5	6,50	0,2	3	40,15	720
	28	2,5	6,5	6,25	0,2	6	67,47	726
	28	2,5	6,5	6,50	0,2	3	40,15	725
	28	3,0	6,5	6,50	0,2	3	40,15	730
	28	3,0	6,5	6,25	0,2	6	68,17	731
	28	3,5	6,5	6,50	0,2	3	40,15	735
	28	4,0	6,5	6,25	0,2	6	69,66	741
	28	4,0	6,5	6,50	0,2	3	40,15	740
	28	5,0	6,5	6,50	0,2	3	40,15	750
	28	6,0	6,5	6,50	0,2	3	40,96	760

P	●
M	●
K	●
N	●
S	○
H	○
O	●

→ v_c/f_z Page 76

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for groove milling (Specialist for aluminium)

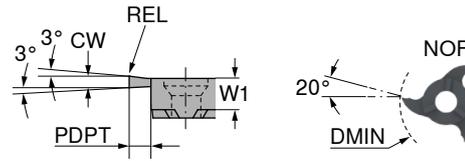

Size	DMIN mm	CW _{0,02} mm	PDPT mm	W1 mm	REL mm	NOF
28	32	2,0	8,5	6,5	0,2	3
	32	2,5	8,5	6,5	0,2	3
	32	3,0	8,5	6,5	0,2	3



53 007 ...

EUR	
W2	920
44,79	925
44,79	930

P	
M	
K	
N	•
S	
H	
O	

→ v_c/f_z Page 76

MiniMill – Milling insert for groove milling with full radius

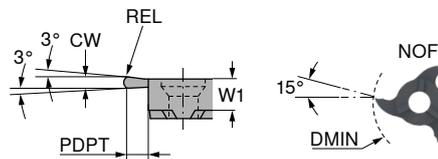

Size	DMIN mm	CW _{+0,03} mm	PDPT mm	W1 mm	REL mm	NOF
10	12	2,2	2,5	3,50	1,1	3
14	16	2,2	3,5	4,60	1,1	3
18	18	2,2	3,5	5,75	1,1	3
22	22	1,0	4,5	5,75	0,5	3
	22	1,6	4,5	5,75	0,8	3
	22	2,0	4,5	5,75	1,0	3
	22	2,4	4,5	5,75	1,2	3
	22	2,8	4,5	5,75	1,4	3
	22	3,0	4,5	5,75	1,5	3
	22	4,0	4,5	5,75	2,0	3
	22	4,4	4,5	5,75	2,2	3
22	5,0	4,5	5,75	2,5	3	

53 008 ...

EUR	
W2	011
40,15	111
40,86	211
41,66	305
41,66	308
41,66	310
43,17	312
41,66	314
41,66	315
41,66	320
42,92	322
44,55	325

P	•
M	•
K	•
N	•
S	•
H	○
O	○

→ v_c/f_z Page 76






When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for groove milling, cross-pitched



≥ 12 mm

CWX500



53 015 ...

Size	DMIN mm	INSL mm	CW mm _{-0,02}	PDPT mm	W1 mm	REL mm	NOF	53 015 ...	
								EUR W2	
10	12	11,7	1,5	2,0	3,5	0,2	6	54,04	114
	12	11,7	2,0	2,0	3,5	0,2	6	54,04	119
14	16	15,7	1,5	2,5	4,5	0,2	6	54,75	314
	16	15,7	2,0	2,5	4,5	0,2	6	54,75	319
	16	15,7	2,5	2,5	4,5	0,2	6	54,75	324
18	18	17,7	2,0	4,0	5,8	0,2	6	61,10	419
	18	17,7	2,5	4,0	5,8	0,2	6	61,10	424
	18	17,7	3,0	4,0	5,8	0,2	6	61,10	429
	20	19,7	2,0	5,0	5,8	0,2	6	61,10	469
	20	19,7	2,5	5,0	5,8	0,2	6	61,10	474
	20	19,7	3,0	5,0	5,8	0,2	6	61,10	479
22	22	21,7	2,0	4,5	6,2	0,2	6	59,02	820
	22	21,7	2,5	4,5	6,2	0,2	6	59,02	825
	22	21,7	3,0	4,5	6,2	0,2	6	59,02	830
	22	21,7	4,0	4,5	6,2	0,2	6	59,02	840
	37	36,7	1,5	12,0	6,2	0,1	6	80,31	865
	37	36,7	2,0	12,0	6,2	0,2	6	81,47	870
28	25	24,8	2,5	5,0	6,4	0,2	6	68,86	626
	25	24,8	3,0	5,0	6,4	0,2	6	69,66	631
	25	24,8	4,0	5,0	6,4	0,2	6	71,05	641
	25	24,8	5,0	5,0	6,4	0,2	6	73,36	651
	25	24,8	6,0	5,0	6,4	0,2	6	77,88	661
	28	27,7	2,5	6,5	6,2	0,2	6	67,12	726
	28	27,7	3,0	6,5	6,2	0,2	6	67,81	731
	28	27,7	4,0	6,5	6,2	0,2	6	69,32	741
	28	27,7	5,0	6,5	6,2	0,2	6	70,23	751
	28	27,7	6,0	6,5	6,2	0,2	6	70,23	761
	35	34,7	2,0	10,0	6,2	0,2	6	73,72	770
	35	34,7	2,5	10,0	6,2	0,2	6	74,41	775
	35	34,7	3,0	10,0	6,2	0,2	6	75,11	780




P	●
M	●
K	●
N	●
S	○
H	○
O	●

→ v_c/f_z Page 76



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for groove milling and chamfering

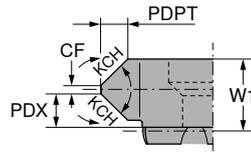

53 009 ...

Size	DMIN mm	CF _{-0,03} mm	PDPT mm	W1 mm	KCH °	PDX mm	NOF	53 009 ...	
								EUR W2	
10	10	0,2	0,35	3,60	15	1,80	6	54,62	015
	10	0,2	0,45	3,60	20	1,80	6	54,62	020
	10	0,2	0,70	3,60	30	1,80	6	54,62	030
	10	0,2	1,20	3,60	45	1,80	6	54,62	045
	12	1,2	0,80	3,50	45	1,20	3	26,96	035
14	16	1,4	1,20	4,50	45	1,60	3	27,65	145
18	18	2,5	1,40	5,85	45	1,70	3	28,22	258
	18	0,2	2,20	5,75	45	3,00	6	60,52	259
22	22	2,0	1,70	5,85	45	2,00	3	29,85	358
	22	0,2	2,50	6,40	45	3,90	6	59,25	463
	22	3,0	3,00	9,40	45	3,25	3	31,35	394 ¹⁾
28	28	0,2	1,90	6,05	45	3,75	6	65,85	560
P									●
M									●
K									●
N									●
S									○
H									○
O									●

1) Use clamping screw 73 082 006




→ v_c/f_z Page 76



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for part-off

- ▲ PDPT = 12,0 mm in combination with holder 53 003 624
- ▲ reduce feed rate by 50 %



Size	DMIN mm	CW ^{+0,02} mm	PDPT mm	W1 mm	REL mm	NOF	53 013 ...	
							EUR	W2
22	37	0,5	12	5,6		6	95,94	705 ¹⁾
	37	0,6	12	5,7		6	95,59	706 ¹⁾
	37	0,8	12	6,0		6	94,31	708 ¹⁾
	37	1,0	12	6,2	0,1	6	91,65	710
	37	1,5	12	6,2	0,1	6	78,11	715
	P							
M								•
K								•
N								•
S								○
H								
O								•

1) The end face is not ground free to the center

MiniMill – Set for cut off

- ▲ Size 22






						53 014 ...	
Tool	Designation	Article no.	Bore-Ø mm	Piece	EUR		
Inserts	Milling inserts for separating	53 013 715	37	2			
Tool holder	Endmill short	53 003 624		1	217,20	990	
Screw	M5 x 12	73 082 005		1			
Tightening Key	T20			1			

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for internal thread milling – Partial profile

Mini Mill \geq M12

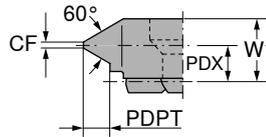

CWX500



53 010 ...

Size	Thread _{min}	TP mm	DMIN mm	CF mm	PDPT mm	W1 mm	PDX mm	NOF	EUR W2	
10	M12	1,0 - 1,75	9,8	0,13	1,02	3,20	2,4	6	61,23	017
	M14	1,0 - 1,75	11,7	0,13	1,08	3,60	2,8	3	41,66	010
	M14	1,0 - 2,0	10,1	0,13	1,25	3,20	2,2	6	61,23	021
	M14	1,0 - 2,0	11,7	0,13	1,25	3,60	2,8	3	41,66	020
	M16	1,5 - 2,75	11,0	0,19	1,67	3,20	2,0	6	61,23	027
	M16	1,5 - 2,75	11,7	0,19	1,67	3,60	2,4	3	41,66	015
	M16	2,0 - 3,0	11,1	0,25	1,78	3,20	1,9	6	61,23	029
	M16	2,0 - 3,0	11,7	0,25	1,78	3,60	2,2	3	41,66	030
14	M18	1,0 - 1,75	15,7	0,12	1,08	4,60	3,8	3	42,36	210
	M18	1,0 - 2,0	15,7	0,12	1,25	4,60	3,5	3	42,36	220
	M20	1,5 - 2,75	15,7	0,18	1,67	4,60	3,5	3	42,36	215
	M22	2,5 - 3,0	15,7	0,31	1,78	4,60	3,4	3	42,36	230
18	M22	1,0 - 1,75	17,7	0,12	1,03	5,85	5,0	3	45,24	410
	M22	1,0 - 2,0	17,7	0,12	1,19	5,85	4,7	3	42,36	412
	M22	1,0 - 2,0	17,7	0,12	1,19	5,85	5,0	6	71,40	416
	M22	1,5 - 2,75	17,7	0,19	1,62	5,85	4,6	3	42,36	415
	M24	2,0 - 3,0	17,7	0,25	1,73	5,85	4,4	3	42,36	425
	M24	2,0 - 3,5	17,7	0,25	2,06	5,85	4,2	3	42,36	455
	M24	2,0 - 3,5	17,7	0,25	2,06	5,85	4,3	6	72,91	434
	M24	2,0 - 3,75	17,7	0,25	2,22	5,85	4,2	3	42,36	420
	M24	2,5 - 5,0	17,7	0,31	2,98	5,85	3,8	3	42,36	430
M24	3,0 - 5,5	17,7	0,38	3,25	5,85	4,2	3	42,36	435	
22	M27	1,0 - 2,0	21,7	0,12	1,19	5,85	4,6	3	43,86	610
	M27	1,0 - 2,0	21,7	0,12	1,19	6,20	5,0	6	70,01	710
	M27	1,5 - 2,75	21,7	0,18	1,62	5,85	4,5	3	43,86	615
	M27	2,0 - 3,75	21,7	0,25	2,22	5,85	4,2	3	43,86	620
	M27	2,5 - 4,5	21,7	0,25	2,70	5,85	3,7	3	45,24	655
	M27	2,0 - 4,5	21,7	0,25	2,70	6,05	4,2	6	71,28	755
	M30	2,5 - 5,0	21,7	0,31	2,98	5,85	3,8	3	43,86	630
	M30	3,5 - 6,0	21,7	0,44	3,52	5,85	3,4	3	45,24	640
M30	3,5 - 6,5	21,7	0,44	3,84	5,85	3,2	3	45,24	645	
28	M33	1,0 - 2,0	27,7	0,12	1,20	6,60	4,5	3	51,27	820
	M33	1,5 - 2,5	27,7	0,18	1,49	6,60	4,3	3	51,27	825
	M33	1,5 - 2,5	27,7	0,19	1,60	6,10	5,0	6	76,72	826
	M36	2,5 - 5,0	27,7	0,38	2,93	6,10	2,3	6	76,72	850
	M36	2,5 - 5,0	27,7	0,37	2,93	6,60	4,0	3	51,27	840
	M39	4,0 - 6,0	27,7	0,62	3,37	6,60	3,6	3	51,27	860
P										●
M										●
K										●
N										●
S										○
H										○
O										●

→ v_c/f_z Page 76






When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for internal thread milling – Full profile

Mini Mill
≥ M22
60°
M

CWX500

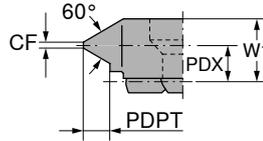

53 011 ...

Size	Thread _{min}	TP mm	DMIN mm	CF mm	PDPT mm	W1 mm	PDX mm	NOF	EUR W2	
18	M22	1,50	17,7	0,18	0,81	5,85	4,8	3	43,86	415
	M22	1,75	17,7	0,20	0,95	5,85	4,7	3	46,76	417
	M22	2,00	17,7	0,25	1,08	5,85	4,6	3	46,76	420
	M24	2,50	17,7	0,31	1,35	5,85	4,4	3	46,76	425
	M27	3,00	17,7	0,37	1,62	5,85	4,3	3	46,76	430
	M27	3,50	17,7	0,43	1,89	5,85	4,0	3	46,76	435
22	M24	1,50	21,7	0,19	0,81	5,85	4,8	3	46,06	615
	M24	1,50	21,7	0,19	0,81	6,20	5,3	6	69,90	715
	M27	1,75	21,7	0,22	0,95	6,20	5,2	6	73,49	717
	M27	1,75	21,7	0,22	0,95	5,85	4,7	3	46,06	617
	M27	2,00	21,7	0,25	1,08	5,85	4,6	3	48,14	620
	M27	2,00	21,7	0,25	1,08	6,20	5,0	6	73,49	720
	M30	3,00	21,7	0,37	1,62	5,85	4,3	3	48,14	630
	M30	3,00	21,7	0,37	1,62	6,20	4,8	6	74,88	730
	M30	3,50	21,7	0,43	1,89	5,85	4,0	3	51,72	635
	M33	4,00	21,7	0,50	2,16	5,85	3,9	3	51,72	640
	M33	4,00	21,7	0,50	2,16	6,20	4,4	6	78,81	740
	M33	4,50	21,7	0,56	2,43	5,85	3,7	3	51,72	645


- P ●
- M ●
- K ●
- N ●
- S ○
- H ○
- O ●

→ v_c/f_z Page 76





When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Milling insert for internal thread milling – Full profile



CWX500

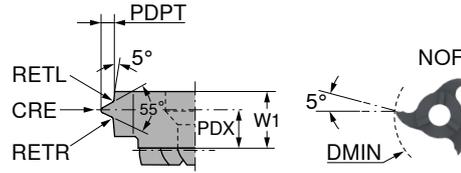

53 012 ...

Size	Thread _{min}	TP mm	DMIN mm	TPI 1/"	W1 mm	PDX mm	PDPT mm	CRE mm	RETL mm	RETR mm	NOF	EUR W2	
10	G 3/8"	1,34	11,7	19	3,60	2,5	0,860	0,18	0,18	0,18	3	51,62	113
	G 1/2"	1,81	11,7	14	3,60	2,3	1,160	0,24	0,24	0,24	3	51,62	118
	G 1"	2,31	11,7	11	3,60	2,0	1,480	0,31	0,31	0,31	3	51,62	123
18	G 3/4"	1,34	17,7	19	5,85	4,9	0,856	0,18	0,18	0,18	3	44,55	219
	G 3/4"	1,81	17,7	14	5,85	4,6	1,160	0,24	0,24	0,24	3	44,55	214
	G 1"	2,31	17,7	11	5,85	4,4	1,480	0,31	0,31	0,31	3	44,55	211
22	G 1"	2,31	21,7	11	5,85	4,0	1,480	0,31	0,31	0,31	3	53,22	311
		3,17	21,7	8	5,85	3,5	2,030	0,43	0,43	0,43	3	57,63	308
	BSW 1 1/2"	4,23	21,7	6	5,85	3,1	2,710	0,58	0,58	0,58	3	57,63	306

P	•
M	•
K	•
N	•
S	○
H	
O	•


→ v_c/f_z Page 76



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Circular milling cutter, extra short

▲ Steel Version

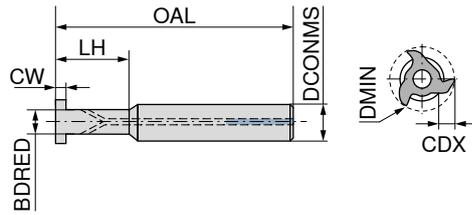

A Steel


53 004 ...

Size	DCONMS _{h6} mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	EUR W1	
10	10	6,0	60	15,2	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	108,10	015
	13	8,0	70	17,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	111,30	225
14	10	8,0	60	17,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	108,10	217
	13	8,0	70	25,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	111,30	225
18	10	9,0	60	17,0	17,7	≤5,6	3,5	4,5	108,10	417
	13	9,0	70	25,0	17,7	≤5,6	3,5	4,5	111,30	425
22	10	11,3	60	10,7	21,7	≤9,15	4,5	7,0	111,30	610
	13	11,3	70	25,7	21,7	≤9,15	4	7,0	115,60	625
28	13	14,0	70	10,7	27,7	≤10	6,5	7,0	111,30	810
	20	14,0	100	35,7	27,7	≤10	6,5	7,0	115,60	835

7

MiniMill – Circular milling cutter, short

▲ Steel Version

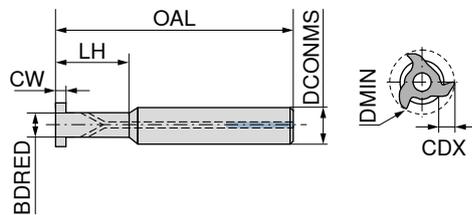

A Steel



B Steel


53 002 ...

53 003 ...

Size	DCONMS _{h6} mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	EUR W1		EUR W1	
10	16	6	80	12,0	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	125,30	012	125,30	012
	14	8	80	16,0	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	125,30	216	125,30	216
18	16	9	80	18,0	17,7	≤5,6	3,5	4,5	122,10	418	122,10	418
	22	12	80	24,0	21,7	≤9,15	4,5	7,0	123,20	624	123,20	624
28	20	14	100	35,7	27,7	≤10	6,5	7,0	115,60	835		

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

MiniMill – Circular milling cutter, vibration-damped

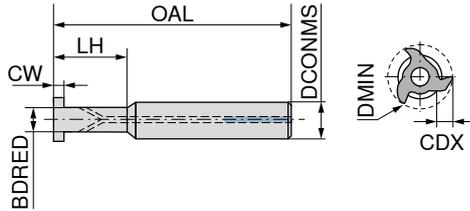

Size	DCONMS _{h6} mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	HM			
									53 001 ... EUR W1	53 000 ... EUR W1		
10	12	6,0	80	21	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	164,60	021	164,60	021
	12	6,0	90	30	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	176,90	030	176,90	030
	12	6,0	100	42	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	201,40	042	201,40	042
	12	7,3	90	30	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	185,90	130	185,90	130
	16	7,3	100	25	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	273,70	025	273,70	025
14	12	8,0	95	29	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	164,60	229	164,60	229
	12	8,0	110	42	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	178,00	242	178,00	242
	12	8,0	120	56	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	201,40	256	201,40	256
	12	9,5	110	42	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	201,40	342	201,40	342
	16	9,5	110	33	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	250,40	233	250,40	233
18	12	9,0	100	32	17,7	≤5,6	3,5	4,5	204,80	432	204,80	432
	12	9,0	100	45	17,7	≤5,6	3,5	4,5	229,20	445	229,20	445
	12	9,0	120	64	17,7	≤5,6	3,5	4,5	271,40	464	271,40	464
	16	9,0	93	25	17,7	≤5,6	3,5	4,5	229,20	425	229,20	425
	16	9,0	100	32	17,7	≤5,6	3,5	4,5	241,40	532	241,40	532
	16	9,0	110	45	17,7	≤5,6	3,5	4,5	283,80	545	283,80	545
	16	9,0	130	64	17,7	≤5,6	3,5	4,5	326,00	564	326,00	564
	16	13,0	110	64	17,7	≤5,6	1,5	4,5	250,40	465	250,40	465
	16	13,0	130	66	17,7	≤5,6	1,5	4,5	317,10	466	317,10	466
22	12		100	42	21,7	≤9,15	4,5	7,0	180,30	642	180,30	642
	12		130	60	21,7	≤9,15	4,5	7,0	213,70	660	213,70	660
	16	11,5	90	30	21,7	≤9,15	4,5	7,0	229,20	630	229,20	630
	16	12,0	100	42	21,7	≤9,15	4,5	7,0	238,10	742	238,10	742
	16	12,0	130	60	21,7	≤9,15	4,5	7,0	284,90	760	284,90	760
	16	12,0	160	85	21,7	≤9,15	4,5	7,0	322,70	685	322,70	685
	20	16,0	110	45	21,7	≤9,15	2,5	7,0	347,10	645	347,10	645
	20	16,0	130	65	21,7	≤9,15	2,5	7,0	349,40	665	349,40	665
28	16	14,3	100	42	27,7 / 24,8	≤10	6,5 / 5	7,0	252,60	842	252,60	842
	16	14,3	130	60	27,7 / 24,8	≤10	6,5 / 5	7,0	300,40	860	300,40	860
	16	14,3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	350,50	885	350,50	885
	20	13,5	104	35	27,7 / 24,8	≤10	6,5 / 5	7,0	312,70	835	312,70	835
	20	14,3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	399,40	985	399,40	985




Spare parts Size	80 950 ...		73 082 ...		73 082 ...	
	EUR		EUR		EUR	
10	8,03	T08 110	Y7		M2,6	3,24 002
14	9,41	T10 112			M3,5	3,24 003
18	9,56	T15 113			M4	3,24 004
22	10,25	T20 114	M5	7,00 006	M5	3,24 005
28	10,25	T20 114			M5	3,24 005

Clamping screw 73 082 006 only for insert 53 009 394


When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Milling inserts for circlip grooves without chamfer

System
300

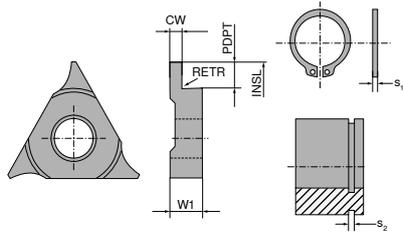

Ti500



Solid carbide

50 853 ...

Size	S _{2 H13} mm	INSL mm	W1 mm	CW _{-0,03} mm	PDPT mm	RETR mm	s ₁ mm	EUR W2	
04	0,90	7,9	2,34	0,98	0,70	0,3	0,80	41,66	300
03	0,90	10,6	2,34	0,98	0,70	0,3	0,80	34,37	302
	1,10	10,6	2,34	1,18	0,90	0,3	1,00	34,37	304
	1,30	10,6	2,34	1,38	1,10	0,3	1,20	34,37	306
	1,60	10,6	2,34	1,68	1,25	0,3	1,50	34,37	308
	1,85	10,6	2,34	1,93	1,25	0,3	1,75	34,37	310
02	0,90	17,5	3,50	0,98	0,70	0,3	0,80	31,02	312
	1,10	17,5	3,50	1,18	0,90	0,3	1,00	31,02	314
	1,30	17,5	3,50	1,38	1,10	0,3	1,20	31,02	316
	1,60	17,5	3,50	1,68	1,25	0,3	1,50	31,02	318
	1,85	17,5	3,50	1,93	1,25	0,3	1,75	31,02	320
	2,15	17,5	3,50	2,23	1,75	0,3	2,00	31,02	322
	2,65	17,5	3,50	2,73	1,75	0,3	2,50	31,02	324
	3,15	17,5	3,50	3,23	2,20	0,3	3,00	31,02	326
01	0,90	23,0	4,00	0,98	0,70	0,3	0,80	31,02	328
	1,10	23,0	4,00	1,18	0,90	0,3	1,00	31,02	330
	1,30	23,0	4,00	1,38	1,10	0,3	1,20	31,02	332
	1,60	23,0	4,00	1,68	1,25	0,3	1,50	31,02	334
	1,85	23,0	4,00	1,93	1,25	0,3	1,75	31,02	336
	2,15	23,0	4,00	2,23	1,75	0,3	2,00	31,02	338
	2,65	23,0	4,00	2,73	1,75	0,3	2,50	31,02	340
	3,15	23,0	4,00	3,23	2,20	0,3	3,00	31,02	342
P									●
M									●
K									●
N									●
S									●
H									○
O									●


7

→ v_c/f_z Page 73




When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Milling inserts for circlip grooves with chamfer

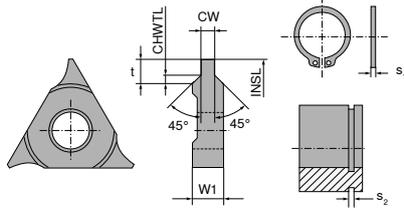

Ti500



Solid carbide

50 852 ...

Size	$s_{2\ H13}$ mm	INSL mm	W1 mm	$CW_{-0.03}$ mm	t mm	CHWTL mm	s_1 mm	EUR W2	
03	1,10	10,6	2,34	1,18	0,50	0,10	1,00	36,34	302
02	1,10	17,5	3,50	1,18	0,50	0,10	1,00	32,98	312
	1,30	17,5	3,50	1,38	0,85	0,15	1,20	32,98	314
	1,60	17,5	3,50	1,68	1,00	0,15	1,50	32,98	316
	1,85	17,5	3,50	1,93	1,25	0,20	1,75	32,98	317
	2,15	17,5	3,50	2,23	1,50	0,20	2,00	32,98	318
	2,65	17,5	3,50	2,73	1,50	0,20	2,50	32,98	319
01	1,10	23,0	4,00	1,18	0,50	0,10	1,00	32,98	320
	1,30	23,0	4,00	1,38	0,70	0,15	1,20	32,98	321
	1,30	23,0	4,00	1,38	0,85	0,15	1,20	32,98	322
	1,60	23,0	4,00	1,68	1,00	0,15	1,50	32,98	324
	1,60	23,0	4,00	1,68	0,85	0,15	1,50	32,98	323
	1,85	23,0	4,00	1,93	1,25	0,20	1,75	32,98	325
	2,15	23,0	4,00	2,23	1,50	0,20	2,00	32,98	326
	2,65	23,0	4,00	2,73	1,75	0,20	2,50	32,98	328
	2,65	23,0	4,00	2,73	1,50	0,20	2,50	32,98	327
	3,15	23,0	4,00	3,32	1,75	0,20	3,00	32,98	329



P	•
M	•
K	•
N	•
S	•
H	○
O	•

→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Milling inserts without profile, ground ready-for-use

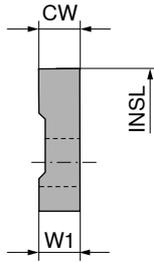

Solid carbide
50 851 ...

Size	CW ^{+0,02} mm	INSL mm	W1 mm
04	2,00	7,9	2,34
	2,34	10,6	2,34
03	3,00	10,6	3,00
	3,50	17,5	3,50
02	5,00	17,5	5,00
	6,00	17,5	6,00
01	4,00	23,0	4,00
	6,50	23,0	6,50

EUR	W2	
41,66		302
34,37		304
36,34		306
31,02		312
36,34		314
40,15		316
38,20		322 ¹⁾
38,20		324 ¹⁾




P	•
M	•
K	•
N	•
S	•
H	○
O	•

1) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 73

7

Milling inserts for chamfering and deburring

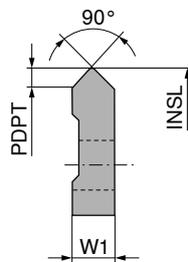

Solid carbide
50 857 ...

Size	PDPT mm	INSL mm	W1 mm
03	1,50	10,6	3,0
02	2,50	17,5	5,0
01	3,25	23,0	6,5

EUR	W2	
34,37		304
34,37		314
34,37		322 ¹⁾

P	•
M	•
K	•
N	•
S	•
H	○
O	•




1) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_m is used. Details on → Page 77+78.

Thread milling insert – Partial profile

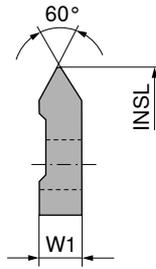

Ti500



Solid carbide
50 855 ...




Size	TP mm	INSL mm	W1 mm
02	1 - 3,5	17,5	3,5
01	1 - 4,0	23,0	4,0

EUR	W2	
38,20		314
38,20		324


P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 73

Thread milling insert – Full profile

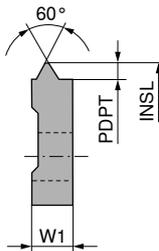

Ti500



Solid carbide
50 859 ...

Size	TP mm	INSL mm	W1 mm	PDPT mm
03	1,0	10,6	2,34	0,578
	1,5	10,6	2,34	0,864
	2,0	10,6	2,34	1,159
02	1,0	17,5	3,50	0,578
	1,5	17,5	3,50	0,864
	2,0	17,5	3,50	1,159
	2,5	16,0	3,50	1,444
	2,5	17,5	3,50	1,444
	3,0	17,5	3,50	1,728
01	1,0	23,0	4,00	0,578
	1,5	23,0	4,00	0,864
	2,0	23,0	4,00	1,159
	2,5	23,0	4,00	1,444
	3,0	23,0	4,00	1,728
	3,5	23,0	4,00	2,023
	4,0	23,0	4,00	2,308
	4,5	23,0	6,50	2,602
	5,0	23,0	6,50	2,887
	6,0	23,0	6,50	3,467

EUR	W2	
47,33		304
47,33		308
47,33		310
47,33		311
47,33		312
47,33		314
50,93		317 ¹⁾
47,33		316
58,33		318
49,08		320
49,08		322
49,08		324
49,08		326
49,08		328
49,08		330
49,08		332
56,48		334
56,48		336
56,48		338 ²⁾


P	●
M	●
K	●
N	●
S	●
H	○
O	●

1) M20x2,5 - profile corrected

2) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 73

Thread milling insert – Full profile

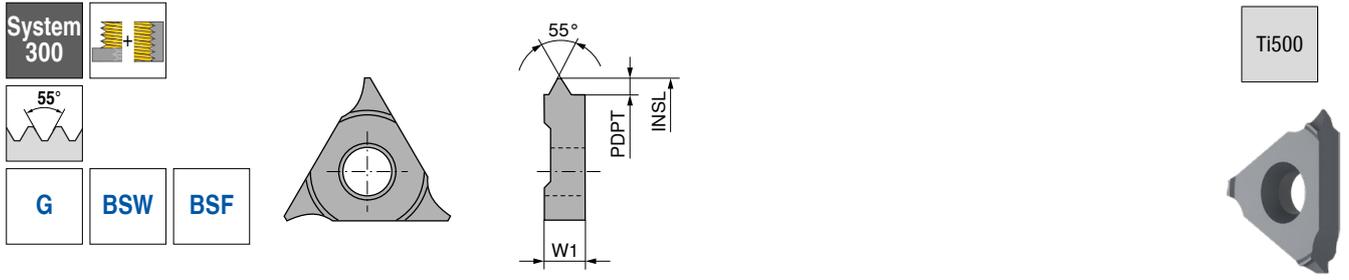

Size	TP mm	TPI 1/''	INSL mm	W1 mm	PDPT mm
02	1,814	14	17,5	3,5	1,162
	2,309	11	17,5	3,5	1,494
01	2,309	11	23,0	4,0	1,494

Solid carbide
50 858 ...
EUR
W2
47,33 314
47,33 312
49,08 322

P	•
M	•
K	•
N	•
S	•
H	○
O	•


→ v_c/f_z Page 73

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

7

Circular milling cutter

▲ Size refers to milling inserts

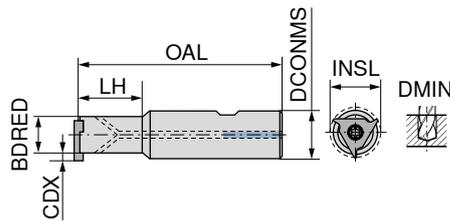

HB

50 800 ...

Size	INSL mm	CDX mm	LH mm	DCONMS ^{h6} mm	OAL mm	BDRED mm	DMIN mm	torque moment Nm	EUR W1	
04	7,9	0,35	17,2	10	57,20	7,1	8	0,9	131,00	015 ¹⁾
03	10,6	1,60	17,2	10	57,20	7,4	11	0,9	131,00	020 ¹⁾
	10,6	1,60	34,2	10	74,20	7,4	11	0,9	193,60	025 ²⁾
02	17,5	2,60	28,7	12	74,05	12,0	20	3,8	138,60	030 ²⁾
	17,5	2,60	63,7	12	108,70	12,0	20	3,8	306,00	045 ²⁾
01	23,0	3,45	38,5	16	87,00	16,1	25	5,5	144,10	050
	23,0	3,45	67,5	16	116,00	16,1	25	5,5	151,70	070
	23,0	3,00	88,5	16	137,00	17,0	25	5,5	338,30	090 ²⁾

- 1) Without Through Coolant
- 2) Carbide version



80 950 ...








70 960 ...

Spare parts Size		EUR Y7		EUR 2A	
04	T06 - IP	10,70	123	4,30	232
03	T06 - IP	10,70	123	4,30	232
02	T15 - IP	12,25	128	6,46	233
01	T20 - IP	12,92	129	6,46	234

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Thread milling insert

▲ Can be used on both sides (except for INSL 10.4)

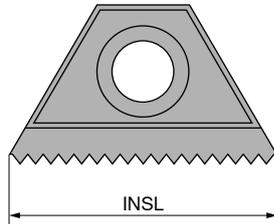

INSL mm	TP mm	Solid carbide 50 890 ...		Solid carbide 50 890 ...		Solid carbide 50 891 ...		Solid carbide 50 891 ...	
		EUR W2		EUR W2		EUR W2		EUR W2	
10,4	0,50	63,54	100						
	0,75	63,54	101						
	1,00	50,93	102	61,68	302				
	1,25	50,93	103						
	1,50	50,93	104	61,68	304				
11,0	0,50	43,97	120						
	0,75	55,43	121						
	1,00	43,97	122	53,58	322				
	1,25	43,97	123						
	1,50	43,97	124	52,65	324				
16,0	0,50	64,80	140						
	0,75	51,62	141						
	1,00	51,62	142	66,54	342	51,62	142	62,96	342
	1,25	51,62	143			51,62	143		
	1,50	51,62	144	62,96	344	51,62	144	62,96	344
	1,75	51,62	145			51,62	145		
	2,00	51,62	146	62,96	346	51,62	146	62,96	346
27,0	1,00	98,83	162	115,00	362	98,83	162	115,00	362
	1,25	98,83	163			98,83	163		
	1,50	98,83	164	115,00	364	98,83	164	115,00	364
	1,75	98,83	165						
	2,00	98,83	166	115,00	366	98,83	166	115,00	366
	2,50	98,83	167			98,83	167		
	3,00	98,83	168	115,00	368	98,83	168	115,00	368
	3,50	98,83	169			98,83	169		
	4,00	98,83	170			98,83	170		
P		●		●		●		●	
M		○		●		○		●	
K		●		●		●		●	
N		●		●		●		●	
S									
H									
O		●		○		●		○	




→ v_c/f_z Page 72



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling insert

▲ Can be used on both sides (except for INSL 10.4)

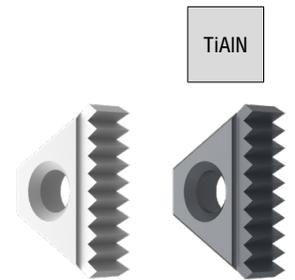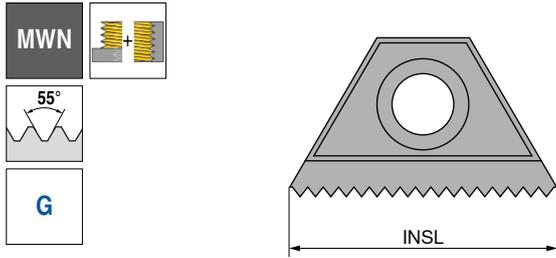




INSL mm	TPI 1/"	TP mm
10,4	19	1,337
16,0	14	1,814
	11	2,309
27,0	11	2,309

	50 895 ...	50 895 ...
	EUR W2 50,93	EUR W2 61,68
	100	300
	51,62	61,68
	142	342
	51,62	61,68
	144	344
	98,83	141,20
	166	366
P	●	●
M	○	●
K	●	●
N	●	●
S		
H		
O	●	○

→ v_c/f_z Page 72

Thread milling insert

▲ Can be used on both sides (except for INSL 10.4)

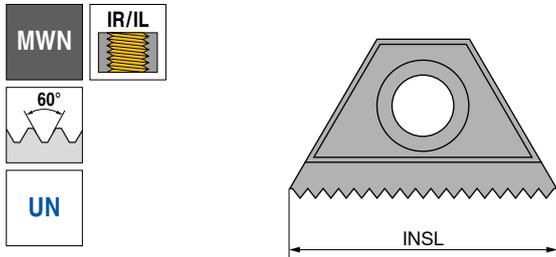

INSL mm	TPI 1/"	TP mm
10,4	20	1,270
	18	1,411
16,0	16	1,588
	12	2,117
27,0	12	2,117
	8	3,175

	50 892 ...
	EUR W2 50,93
	100
	50,93
	102
	51,62
	144
	51,62
	146
	98,83
	166
	98,83
	168
P	●
M	○
K	●
N	●
S	
H	
O	●




→ v_c/f_z Page 72



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling insert

▲ double sided

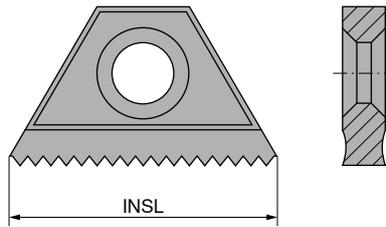

Solid carbide

50 896 ...




INSL mm	TPI 1/"	TP mm	EUR W2	
11	18	1,411	52,65	122
16	18	1,411	62,02	142
	16	1,588	51,62	144

P	●
M	○
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 72

Thread milling insert

▲ double sided

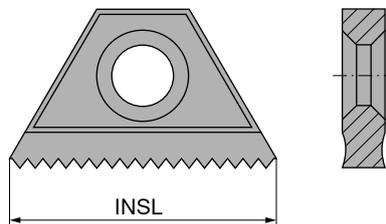

Solid carbide

50 897 ...

INSL mm	TPI 1/"	TP mm	EUR W2	
16	14,0	1,814	51,62	142
	11,5	2,209	51,62	144
27	11,5	2,209	98,83	164
	8,0	3,175	98,83	166

P	●
M	○
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 72

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 77+78.**


i Note! Thread milling inserts are marked R (right-hand thread) and L (left-hand thread). The standard tool holder cannot be used to produce a left-hand thread! Tool holder for left-hand thread available on special request.

Circular milling cutter

▲ INSL refers to milling inserts

Scope of supply:

includes key

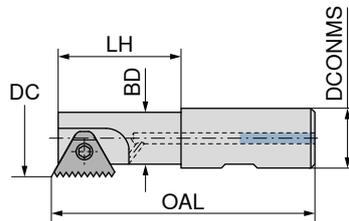


B

50 843 ...

INSL mm	BD mm	LH mm	DCONMS _{ns} mm	OAL mm	DC mm	torque moment Nm	EUR W1	
10,4	6,8	12	12	69	9,0	0,9	182,50	101
	6,8	17	20	84	9,0	0,9	193,30	102
11,0	8,9	12	12	70	11,5	1,2	182,50	111
	8,9	20	20	85	11,5	1,2	193,30	112
16,0	13,6	22	16	90	17,0	2,5	212,70	161
	16,6	43	20	95	20,0	2,5	212,70	162
	18,6	25	25	125	22,0	2,5	265,70	163
27,0	24,0	52	25	110	30,0	9,0	268,90	271
	31,0	58	32	120	37,0	9,0	289,40	273
	24,0	92	25	150	30,0	9,0	310,00	272
	31,0	98	32	160	37,0	9,0	359,60	274

Pilot hole diameter for circular end mill 50 843 ...



BD	TP in mm									
	0,5 mm 48 G/"	0,75 mm 32 G/"	1,0 mm 24 G/"	1,25 mm 20 G/"	1,5 mm 16 G/"	2,0 mm 12 G/"	2,5 mm 10 G/"	3,0 mm 8 G/"	3,5 mm 7 G/"	4,0 mm 6 G/"
6,8	9,5	10	10,7	11,4	12					
8,9	12	12,5	13,2	13,9	14,5					
13,6	17,6	18,2	19	19,6	20	21				
16,6	20,7	21,4	22	22,6	23	24				
18,6	22,7	23,4	24	24,6	25	26				
24,0	30,7	31,4	32	32,8	33,5	34,6	36,6	39	42	45
31,0	38	38,6	39,5	40,4	41	42	44	46,5	49	52



Spare parts INSL	80 950 ...		70 950 ...	
	EUR Y7		EUR 2A	
10,4		T07 8,03 109		M2,2x5,0 1,94 200
11		T08 8,03 110		M2,6x6,5 1,94 201
16		T10 9,41 112		UNC5-40 x 8 1,94 202
27		T25 10,53 115		M5x15 3,01 203

Circular milling cutter

▲ INSL refers to milling inserts

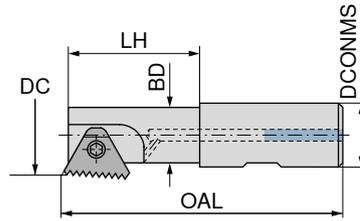

50 844 ...

INSL mm	BD mm	Thread	LH mm	DCONMS _{h6} mm	OAL mm	DC mm	torque moment Nm	EUR	
16	12,5	NPT 1/2	22	16	90	15,5	2,5	193,30	161
	15,0	NPT 3/4 - 1 1/4	23	20	85	19,0	2,5	211,70	162
27	24,0	NPT 1 1/2 - 2	52	25	110	30,0	9,0	268,90	271
	31,0	NPT > 2	58	32	120	37,0	9,0	289,40	272

7



Key D



Clamping screw


80 950 ...

70 950 ...

Spare parts	INSL	INSL	EUR		EUR	
16	T10	112	9,41	UNC5-40 x 8	1,94	202
27	T25	115	10,53	M5x15	3,01	203

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Thread milling insert

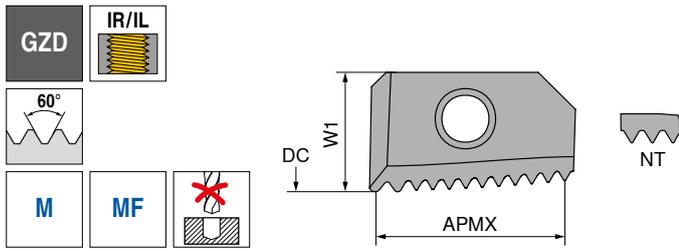

Solid carbide


50 863 ...

DC mm	TP mm	W1 mm	APMX mm	NT	EUR W2	
12	1,0	7,5	12,0	13	45,36	300
	1,5	7,5	10,5	8	45,36	302
17	1,0	11,0	16,0	17	45,36	310
	1,5	11,0	16,5	12	45,36	312
	2,0	11,0	16,0	9	45,36	314
20	1,0	7,5	12,0	13	45,36	320
	1,5	7,5	10,5	8	45,36	322
25	1,0	11,0	16,0	17	45,36	330
	1,5	11,0	16,5	12	45,36	332
	2,0	11,0	16,0	9	45,36	334

P	•
M	•
K	•
N	•
S	
H	
O	

→ v_c/f_z Page 73

Thread milling insert

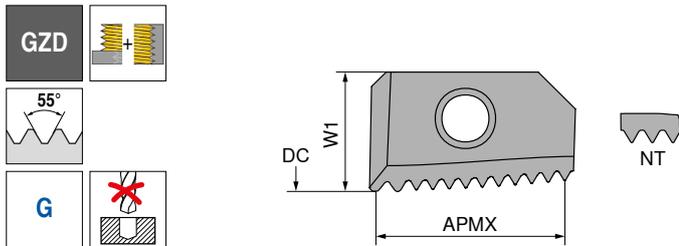

Solid carbide

50 864 ...


DC mm	TPI 1/"	W1 mm	APMX mm	NT	EUR W2	
12	14	7,5	9,07	6	45,36	300
17	14	11,0	16,33	10	58,33	312 ¹⁾
	11	11,0	16,16	8	58,33	314 ²⁾
	11	11,0	16,16	8	58,33	310
25	14	11,0	16,33	10	58,33	332
	11	11,0	16,16	8	58,33	330

P	•
M	•
K	•
N	•
S	
H	
O	

1) Thread: 5/8 - 3/4 - 7/8
2) 1/2" Profile corrected

→ v_c/f_z Page 73

Circular milling cutter

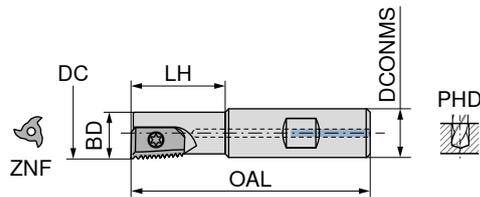

B

DC mm	LH mm	DCONMS _{n6} mm	OAL mm	BD mm	ZNF	PHD mm	torque moment Nm		
12	18	16	74,0	9,4	1	14	1,1		
17	30	16	79,0	13,7	1	19	3,8		
20	32	20	83,0	17,5	3	22	1,1		
25	50	25	107,6	21,7	3	26	3,8		
	85	25	142,6	21,7	3	26	3,8		

50 842 ...

EUR W1

179,00 121

179,00 171

213,90 201

280,60 251

751,10 252 ¹⁾

1) Heavy metal version with mounted head



Key D



Clamping screw

80 950 ...

EUR Y7

10,51 125

12,25 128

10,51 125

12,25 128

70 960 ...

EUR 2A

4,30 244

4,30 245

4,30 244

4,30 245





Spare parts

DC					
12	T08 - IP	10,51	125	M2,5x6,5	4,30 244
17	T15 - IP	12,25	128	M4x7,5	4,30 245
20	T08 - IP	10,51	125	M2,5x6,5	4,30 244
25	T15 - IP	12,25	128	M4x7,5	4,30 245



When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling insert

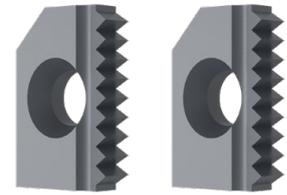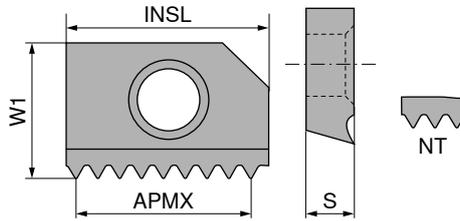

INSL mm	TP mm	W1 mm	APMX mm	S mm	NT	Solid carbide 50 887 ...		Solid carbide 50 885 ...	
						EUR W2		EUR W2	
14,5	0,50	10,0	13,50	3,18	28			70,81	350
	0,75	10,0	13,50	3,18	19			70,81	352
	1,00	10,0	13,00	3,18	14			41,66	354
	1,25	10,0	12,50	3,18	11	54,62	304	54,62	356
	1,50	10,0	12,00	3,18	9	54,62	308	41,66	358
	1,75	10,0	12,25	3,18	8			54,62	360
	2,00	10,0	12,00	3,18	7	54,62	312	41,66	362
	2,50	10,0	10,00	3,18	5			49,08	364
	2,50	10,0	10,00	3,18	5			49,08	366 ¹⁾
15,0	3,00	10,5	12,00	3,18	5			58,33	370 ²⁾
	3,50	10,5	10,50	3,18	4			58,33	372 ²⁾
21,0	1,00	10,0	19,00	3,18	20			47,33	380
	1,50	10,0	19,50	3,18	14			47,33	382
	1,50	10,0	18,00	3,18	13	54,62	320	47,33	384
	2,00	10,0	18,00	3,18	10			47,33	384
26,0	1,50	15,0	24,00	5,00	17			80,07	390
	2,00	15,0	24,00	5,00	13			80,07	392
	3,00	15,0	21,00	5,00	8			80,07	396
	3,50	15,0	20,00	5,00	7			118,00	398
	4,00	15,0	20,00	5,00	6			118,00	400
P							•	•	
M							•	•	
K							•	•	
N							•	•	
S									
H									
O									



1) M20x2,5 - profile corrected
2) Without chamfer

→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_m is used. Details on → Page 77+78.

Thread milling insert

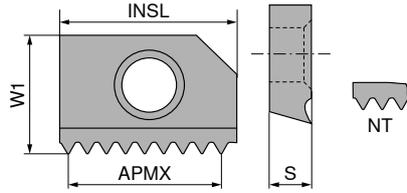

Solid carbide
50 888 ...

INSL mm	TPI 1/"	TP mm	W1 mm	APMX mm	S mm	NT
14,5	18	1,411	10	11,28	3,18	9
	16	1,587	10	11,11	3,18	8
	14	1,814	10	12,69	3,18	8
	12	2,116	10	10,58	3,18	6
	11	2,309	10	11,54	3,18	6
21,0	14	1,814	10	18,14	3,18	11
	11	2,309	10	18,47	3,18	9
26,0	11	2,309	15	23,09	5,00	11



EUR W2	
45,36	310
45,36	312
45,36	314
45,36	316
45,36	318
54,62	320
54,62	322
87,26	330

P	•
M	•
K	•
N	•
S	
H	
O	

→ v_c/f_z Page 73

7

Thread milling insert

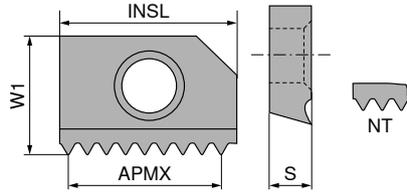

Solid carbide
50 894 ...

INSL mm	TPI 1/"	TP mm	W1 mm	APMX mm	S mm	NT
14,5	18	1,411	10	12,69	3,18	10
	16	1,587	10	11,11	3,18	8

EUR W2	
65,37	302
65,37	304



P	•
M	•
K	•
N	•
S	
H	
O	

→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling insert

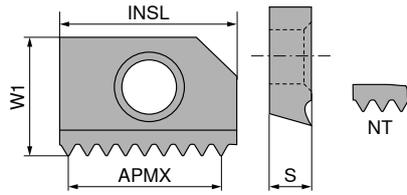

Solid carbide
50 889 ...

INSL mm	TPI 1/"	TP mm	W1 mm	APMX mm	S mm	NT	EUR W2	
14,5	18	1,411	10	12,69	3,18	10	67,36	310
	16	1,587	10	12,70	3,18	9	67,36	312
21,0	16	1,587	10	19,05	3,18	13	81,82	320
	14	1,814	10	18,14	3,18	11	81,82	322
	12	2,116	10	18,04	3,18	10	81,82	324

P	•
M	•
K	•
N	•
S	
H	
O	


→ v_c/f_z Page 73



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Circular milling cutter


▲ INSL refers to milling inserts

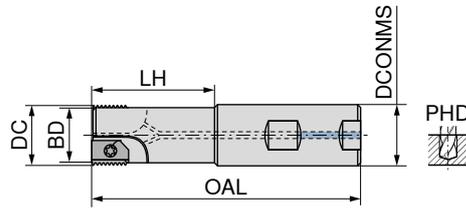

50 841 ...

INSL mm	DC mm	LH mm	DCONMS _{n6} mm	OAL mm	BD mm	ZNP	PHD mm	torque moment Nm	EUR W1	
14,5	16	30,0	16	78	12,7	1	18,5	3,8	163,80	016
	16	50,0	16	98	12,7	1	18,5	3,8	260,40	017 ¹⁾
	20	60,0	20	110	16,8	1	23,0	3,8	194,40	020
	25	48,2	25	106	21,5	2	30,0	3,8	290,40	025
	25	92,2	25	150	21,5	2	30,0	3,8	632,10	026 ¹⁾
15,0	18	30,0	16	79	12,7	1	20,0	3,8	179,00	218
	22	60,0	20	110	16,8	1	26,0	3,8	194,40	222
	27	48,2	25	106	21,5	2	32,0	3,8	290,40	227
21,0	16	31,3	20	85	12,7	1	18,5	3,8	170,40	316
	22	32,8	25	92	18,7	1	26,0	3,8	179,00	322
	22	62,8	25	122	18,7	1	26,0	3,8	623,10	323 ¹⁾
	28	38,3	32	102	24,7	2	35,0	3,8	330,80	328
	28	78,3	32	142	24,5	2	35,0	3,8	931,40	327 ¹⁾
26,0	25	48,5	25	107	20,0	1	30,0	3,8	230,30	125

1) Heavy metal version



80 950 ...

70 960 ...

Spare parts
for Article no.

Article no.		EUR Y7		EUR 2A	
50 841 016	T15 - IP	12,25	128	6,46	237
50 841 017	T15 - IP	12,25	128	6,46	237
50 841 020	T15 - IP	12,25	128	4,30	245
50 841 025	T15 - IP	12,25	128	6,46	242
50 841 026	T15 - IP	12,25	128	6,46	242
50 841 218	T15 - IP	12,25	128	6,46	237
50 841 222	T15 - IP	12,25	128	6,46	237
50 841 227	T15 - IP	12,25	128	6,46	242
50 841 316	T15 - IP	12,25	128	6,46	237
50 841 322	T15 - IP	12,25	128	6,46	237
50 841 323	T15 - IP	12,25	128	6,46	242
50 841 328	T15 - IP	12,25	128	6,46	242
50 841 327	T15 - IP	12,25	128	6,46	242
50 841 125	T15 - IP	12,25	128	6,46	241


When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → [Page 77+78](#).

Thread milling insert – partial profile

EAW



M UN

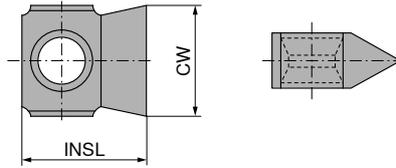

TiN



Solid carbide
50 867 ...
EUR W2
55,20 115
55,20 225

DC mm	TP mm	TPI 1/''	CW mm	INSL mm
16,5	1,5 - 3,0	16 - 10	5	7,0
18	2,5 - 3,5	10 - 7	5	7,8



G

DC mm	TP mm	TPI 1/''	CW mm	INSL mm
16,5	1,814	14	5	7


50 868 ...
EUR W2
67,59 114

Thread milling insert – partial profile

EAW



M UN

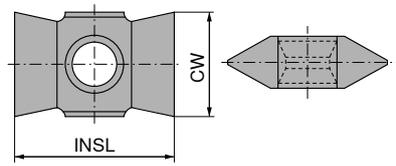

TiN



Solid carbide
50 860 ...
EUR W2
41,43 315
41,43 325
46,76 415
46,76 425

DC mm	TP mm	TPI 1/''	CW mm	INSL mm
23,85	1,5 - 2,5	16 - 10	6,35	9,52
23,85	2,5 - 4,0	10 - 6	6,35	9,52
32,85	1,5 - 2,5	16 - 10	8,50	13,50
32,85	2,5 - 5,5	10 - 4,5	8,50	13,50



G

DC mm	TP mm	TPI 1/''	CW mm	INSL mm
23,85	2,309	11	6,35	9,52
32,85	2,309	11	8,50	13,50


50 861 ...
EUR W2
46,76 311
54,62 411

P	●
M	●
K	●
N	●
S	●
H	○
O	○

→ v_c/f_z Page 72

Circular milling cutter

Scope of supply:
including key

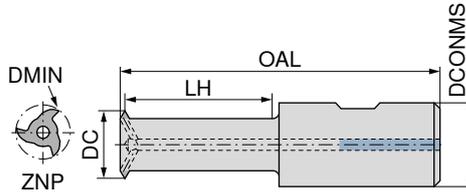

50 848 ...

DC mm	DMIN mm	TP mm	TPI 1/''	LH mm	DCONMS _{h6} mm	OAL mm	ZNP	torque moment Nm	
16,5 / 18,0	17,5 / 19,0	1,5 - 3,0	16 - 10	60	20	114	2	0,9	
23,85	25,5	1,5 - 4,0	24 - 6	90	32	154	3	0,9	
32,85	35,0	1,5 - 5,5	16 - 4,5	115	32	179	3	2,5	

EUR	
W1	
332,70	020
392,00	030
406,00	040

7



80 950 ...

70 950 ...

Spare parts
for Article no.

Article no.		EUR			EUR	
50 848 020	T07 - IP	10,53	124	M2,5x8,5	10,73	739
50 848 030	T07 - IP	10,53	124	M2,5x8,5	10,73	739
50 848 040	T09 - IP	11,58	126	M3x11	10,73	740


When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling insert – partial profile

EWM



M UN

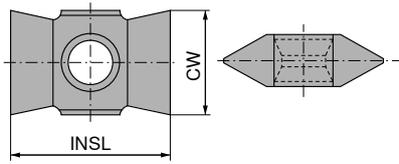

TiN



Solid carbide

50 870 ...

DC mm	TP mm	TPI 1/"	CW mm	INSL mm
40,25	1,5 - 3,0	16 - 9	9,5	15,50
40,25	3,0 - 6,0	9 - 4	9,5	15,50
52,55 / 66,55	1,5 - 3,0	16 - 9	12,5	19,00
52,55 / 66,55	3,0 - 6,0	9 - 4	12,5	19,00
92	6,0 - 8,0	4	14,3	28,58

EUR W2	
52,89	515
52,89	530
58,55	615
58,55	630
93,51	760



G

DC mm	TP mm	TPI 1/"	CW mm	INSL mm
40,25	2,309	11	9,5	15,5
52,55	2,309	11	12,5	19,0

50 871 ...

EUR W2	
60,76	511
71,63	611

P	●
M	●
K	●
N	●
S	●
H	○
O	○

→ v_c/f_z Page 72




When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Circular milling cutter

Scope of supply:

including key

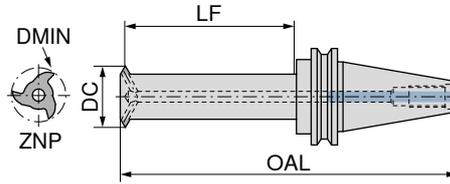

DIN 69871

50 849 ...

DC mm	DMIN mm	TP mm	TPI 1/''	LF mm	OAL mm	Adapter	ZNP	torque moment Nm	EUR	
40,25	43,0	1,5 - 6,0	16 - 4,0	145	247,0	SK 40	4	5,5	817,60	048
40,25	43,0	1,5 - 6,0	16 - 4,0	145	280,5	SK 50	4	5,5	842,40	148
52,55	56,0	1,5 - 6,0	16 - 4,0	195	331,0	SK 50	4	8,0	962,20	164
66,55	70,5	1,5 - 6,0	16 - 4,0	260	398,0	SK 50	7	8,0	1.323,00	080
92,00	100,0	6,0 - 8,0	4,0	360	497,0	SK 50	7	8,0	1.540,00	115

7



Key D



Clamping screw


80 950 ...

70 950 ...

Spare parts	DC		EUR		EUR	
	40,25	T15 - IP	12,25	128	M4x13	10,73 741
	52,55 - 92	T20 - IP	12,92	129	M5x15	10,73 742

When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{im} is used. Details on → **Page 77+78.**

MicroMill – Solid Carbide Circular End Milling Cutter

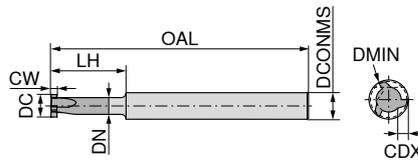

CWX500



HA

Solid carbide


53 050 ...

DC mm	CW $\pm 0,02$ mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS h_6 mm	ZFP	DMIN mm	EUR	
5,8	0,7	0,8	15,2	58	3,8	6	3	6	58,79	070
	0,8	0,8	15,2	58	3,8	6	3	6	58,79	080
	0,9	0,8	15,2	58	3,8	6	3	6	58,79	090
	1,0	0,8	15,2	58	3,8	6	3	6	58,79	100
	1,5	0,8	15,2	58	3,8	6	3	6	58,79	150
7,8	0,7	1,2	25,4	68	5,0	8	3	8	74,18	170
	0,8	1,2	25,4	68	5,0	8	3	8	74,18	180
	0,9	1,2	25,4	68	5,0	8	3	8	74,18	190
	1,0	1,2	25,4	68	5,0	8	3	8	74,18	200
	1,5	1,2	25,4	68	5,0	8	3	8	74,18	250
	2,0	1,2	25,4	68	5,0	8	3	8	74,18	300

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 76

MicroMill – Solid Carbide Circular End Milling Cutter

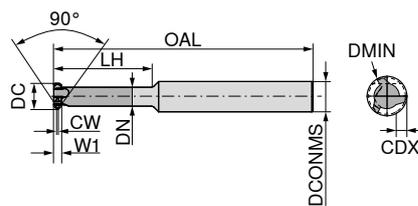

CWX500



HA

Solid carbide



53 051 ...

DC mm	W1 mm	CW mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS h_6 mm	ZFP	DMIN mm	EUR	
5,8	2	0,2	0,8	15	58	4,2	6	3	6	56,71	010
	2	0,2	0,8	25	68	4,2	6	3	6	71,99	020
7,8	2	0,2	1,2	25	68	5,0	8	3	8	87,37	110
	2	0,2	1,2	35	78	5,0	8	3	8	92,00	120

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 76

MicroMill – Solid Carbide Circular Thread Milling Cutter – Full profile

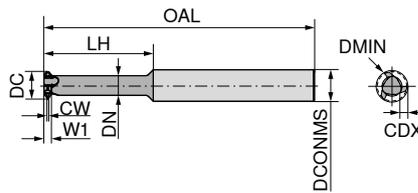

CWX500



HA Solid carbide



53 052 ...

DC mm	Thread	TP mm	W1 mm	CW mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS _{h6} mm	ZEPF	DMIN mm	EUR W1	
1,18	M1,6	0,35	0,40	0,04	0,19	4,0	32	0,64	3	3	1,38	69,08	160
1,38	M1,8	0,35	0,50	0,04	0,19	5,0	32	0,70	3	3	1,58	68,27	180
1,50	M2	0,40	0,56	0,05	0,22	5,0	32	0,90	3	4	1,70	76,04	200
1,95	M2,5	0,45	0,60	0,06	0,25	6,0	32	1,15	3	4	2,15	75,23	250
2,40	M3	0,50	0,60	0,06	0,27	7,0	32	1,60	3	4	2,60	74,52	300
2,80	M3,5	0,60	0,74	0,08	0,33	8,0	32	1,80	3	4	3,00	72,91	350
3,10	M4	0,70	0,82	0,09	0,38	9,0	44	1,98	5	4	3,30	79,16	400
3,60	M5	0,80	0,98	0,10	0,43	10,0	44	2,20	5	4	3,80	76,84	500
4,10	M6	1,00	0,98	0,13	0,54	12,2	44	2,70	5	4	4,30	75,23	600

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 76

MicroMill – Solid Carbide Circular Thread Milling Cutter – Partial profile

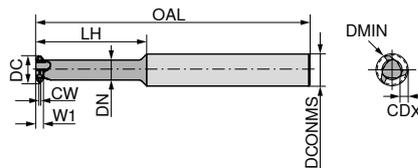

CWX500



HA Solid carbide

53 053 ...



DC mm	TP mm	W1 mm	CW mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS _{h6} mm	ZEPF	DMIN mm	EUR W1	
5,8	0,5 - 1,5	2	0,06	0,91	15,2	58	3,5	6	3	6	61,34	010
7,8	0,5 - 1,5	2	0,06	0,91	25,4	68	5,5	8	3	8	81,24	110
7,8	1,0 - 2,0	2	0,12	1,19	25,4	68	5,0	8	3	8	81,24	120

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 76

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_m is used. Details on → Page 77+78.

Drill thread milling cutter with chamfer facet

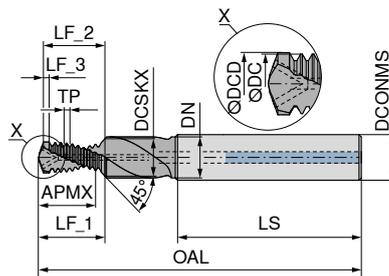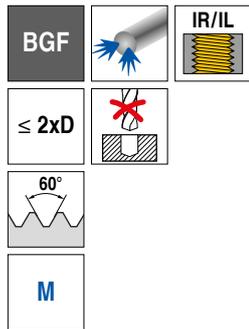

NEW

NEW



HA

HA

Solid carbide

Solid carbide

50 869 ...

50 854 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	DCD mm	DCSKX mm	DN mm	LF_1 mm	LF_2 mm	LF_3 mm	ZEFP	EUR W1	EUR W1
2,45	M3	88901001000013	0,50	49	5,8	36	6	2,5	3,3	4,5	6,8	6,4	0,5	2	193,30	03000 ¹⁾
2,45	M3	88906001000013	0,50	49	5,8	36	6	2,5	3,3	4,5	6,8	6,4	0,5	2		207,50 03000 ¹⁾
3,24	M4	88935001000015	0,70	49	7,3	36	6	3,3	4,3	4,5	9,4	8,9	0,7	2		245,70 04000
3,24	M4	88941001000015	0,70	49	7,3	36	6	3,3	4,3	4,5	9,4	8,9	0,7	2	217,40	04000
4,10	M5	88935001000017	0,80	55	9,2	36	6	4,2	5,3	5,5	11,7	11,0	0,8	2		243,50 05000
4,10	M5	88941001000017	0,80	55	9,2	36	6	4,2	5,3	5,5	11,7	11,0	0,8	2	214,00	05000
4,85	M6	88935001000018	1,00	62	11,4	36	8	5,0	6,3	6,6	14,5	13,7	1,0	2		243,50 06000
4,85	M6	88941001000018	1,00	62	11,4	36	8	5,0	6,3	6,6	14,5	13,7	1,0	2	214,00	06000
6,45	M8	88935001000020	1,25	74	14,2	40	10	6,8	8,3	9,0	18,2	17,1	1,3	2		282,90 08000
6,45	M8	88941001000020	1,25	74	14,2	40	10	6,8	8,3	9,0	18,2	17,1	1,3	2	254,40	08000
8,08	M10	88935001000022	1,50	79	18,5	45	12	8,5	10,3	11,0	23,4	22,1	1,5	2		341,80 10000
8,08	M10	88941001000022	1,50	79	18,5	45	12	8,5	10,3	11,0	23,4	22,1	1,5	2	286,10	10000
9,74	M12	88935001000024	1,75	89	21,6	45	14	10,3	12,3	13,5	27,1	25,5	1,5	2		456,40 12000
9,74	M12	88941001000024	1,75	89	21,6	45	14	10,3	12,3	13,5	27,1	25,5	1,5	2	389,90	12000
11,35	M14	88935001000025	2,00	102	26,6	48	16	12,0	14,3	15,5	32,8	30,9	1,5	2		519,80 14000
11,35	M14	88941001000025	2,00	102	26,6	48	16	12,0	14,3	15,5	32,8	30,9	1,5	2	483,70	14000
13,28	M16	88935001000026	2,00	102	30,6	48	18	14,0	16,3	17,5	37,1	35,0	1,5	2		608,30 16000
13,28	M16	88941001000026	2,00	102	30,6	48	18	14,0	16,3	17,5	37,1	35,0	1,5	2	564,60	16000

1) Without Through Coolant



NEW

NEW

50 869 ...

50 854 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS mm	DCD mm	DCSKX mm	DN mm	LF_1 mm	LF_2 mm	LF_3 mm	ZEFP	EUR W1	EUR W1
6,79	M8x1	88935002000070	1,0	74	15,40	40	10	7,0	8,3	9,0	18,8	17,7	1,0	2		324,40 08100
6,79	M8x1	88941002000070	1,0	74	15,40	40	10	7,0	8,3	9,0	18,8	17,7	1,0	2	294,80	08100
8,75	M10x1	88941002000094	1,0	79	19,40	45	12	9,0	10,3	11,0	23,2	21,8	1,0	2	317,70	10100
8,75	M10x1	88935002000094	1,0	79	19,40	45	12	9,0	10,3	11,0	23,2	21,8	1,0	2		373,50 10100
10,74	M12x1	88935002000111	1,0	89	22,40	45	14	11,0	12,3	13,5	26,4	24,8	1,0	2		477,20 12100
10,06	M12x1,5	88935002000113	1,5	89	23,01	45	14	10,5	12,3	13,5	28,2	26,6	1,5	2		477,20 12200
10,06	M12x1,5	88941002000113	1,5	89	23,01	45	14	10,5	12,3	13,5	28,2	26,6	1,5	2	437,90	12200



P																
M																
K															○	●
N															●	○
S																
H																
O															●	○

→ v_c/f_z Page 75



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Drill thread milling cutter with chamfer facet

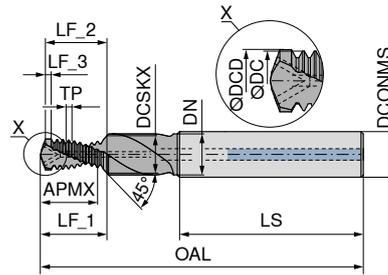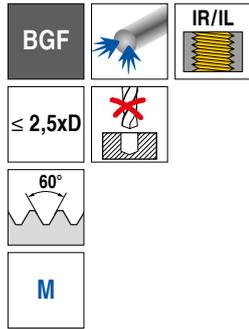

NEW

NEW

Ti601



HA

HA

Solid carbide

Solid carbide

50 898 ...

50 862 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{n6} mm	DCD mm	DCSKX mm	DN mm	LF_1 mm	LF_2 mm	LF_3 mm	ZEFP	EUR W1	EUR W1
4,10	M5	88961001000017	0,80	55	11,57	36	6	4,2	5,3	5,5	14,1	13,4	0,8	2	214,00	05000
4,85	M6	88961001000018	1,00	62	13,40	36	8	5,0	6,3	6,6	16,5	15,7	1,0	2	214,00	06000
4,85	M6	88956001000018	1,00	62	13,40	36	8	5,0	6,3	6,6	16,5	15,7	1,0	2		243,50 06000
6,45	M8	88956001000020	1,25	74	19,20	40	10	6,8	8,3	9,0	23,2	22,1	1,3	2		282,90 08000
6,45	M8	88961001000020	1,25	74	19,20	40	10	6,8	8,3	9,0	23,2	22,1	1,3	2	254,40	08000
8,08	M10	88956001000022	1,50	79	23,00	45	12	8,5	10,3	11,0	27,9	26,6	1,5	2		341,80 10000
8,08	M10	88961001000022	1,50	79	23,00	45	12	8,5	10,3	11,0	27,9	26,6	1,5	2	286,10	10000
9,74	M12	88956001000024	1,75	89	28,60	45	14	10,3	12,3	13,5	34,1	32,5	1,5	2		456,40 12000
9,74	M12	88961001000024	1,75	89	28,60	45	14	10,3	12,3	13,5	34,1	32,5	1,5	2	389,90	12000

P	
M	
K	○ ●
N	● ○
S	
H	
O	● ○


→ v_c/f_z Page 75

7

Circular Thread Milling Cutter

▲ Note: left-hand cutting (M04)

ZBGF		
≤ 2xD	IR/IL	45-65 HRC
60°		
M		

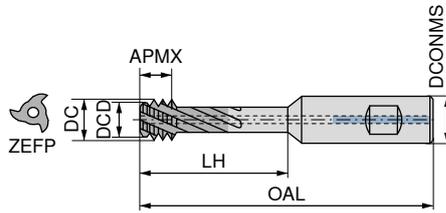

HB

Solid carbide

50 840 ...

DC mm	Thread	TP mm	APMX mm	LH mm	DCONMS mm	DCD mm	OAL mm	ZAFP	EUR W1	
2,3	M3x0,5	0,50	2,0	7,0	6	2,10	51	4	169,60	030 ¹⁾
3,0	M4x0,7	0,70	2,8	9,4	6	2,60	51	4	169,80	040 ¹⁾
3,8	M5x0,8	0,80	3,2	11,6	6	3,40	51	4	168,30	050 ¹⁾
4,6	M6x1 - M7x1	1,00	4,0	14,0	8	4,10	60	4	168,20	060 ¹⁾
6,2	M8x1,25 - M10x1,25	1,25	5,0	19,0	10	5,60	71	4	181,20	080
7,8	M10x1,5 - M12x1,5	1,50	6,0	25,0	10	7,00	76	4	195,30	100
9,2	M12x1,75	1,75	7,0	31,0	12	8,30	86	4	207,60	120
11,1	M14x2 - M16x2	2,00	8,0	36,0	16	10,04	98	4	226,90	140

P
M
K
N
S
H
O

1) Without Through Coolant


→ v_c/f_z Page 71

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.


Caution: left-hand cutting (M04) → spindle rotation left!

Shank thread milling cutter with shank-end countersink

▲ Note: left-hand cutting



NEW
Ti602

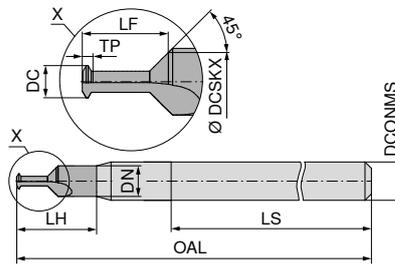

HA

Solid carbide

50 804 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	DN mm	LS mm	LH mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEFP	EUR	
0,75	M1	88977001000001	0,25	40	1,8	28	5,2	3	1,5	2,1	2	139,80	01000
1,10	M1,4	88977001000004	0,30	40	2,0	28	5,7	3	1,7	2,6	2	139,80	01400
1,25	M1,6	88977001000005	0,35	40	2,4	28	6,0	3	2,1	3,1	2	139,80	01600
1,60	M2	88977001000008	0,40	40	3,0	28		3	2,6	3,7	2	131,00	02000
1,75	M2,2	88977001000009	0,45	40	3,0	28		3	2,5	3,9	2	131,00	02200
2,05	M2,5	88977001000011	0,45	40	3,0	28		3	2,9	4,5	2	131,00	02500



P	○
M	○
K	
N	○
S	○
H	○
O	●

→ v_c/f_z Page 75

Caution: left-hand cutting (M04) → spindle rotation left!

7

Thread Milling Cutter with Chamfer Facet

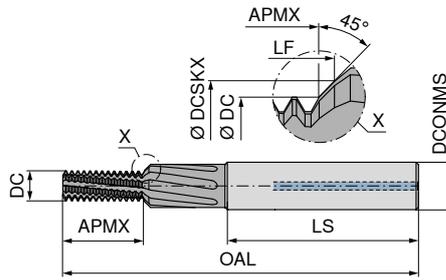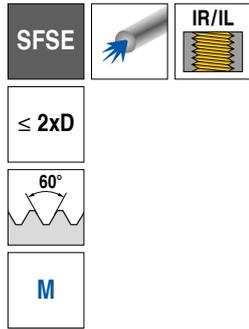

NEW
AlCrN



HA Solid carbide
50 806 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEFP	EUR W1	
3,14	M4	88296001000015	0,70	49	8,0	36	6	4,3	8,6	5	150,30	04000
3,95	M5	88296001000017	0,80	55	9,9	36	6	5,3	10,6	5	150,30	05000
4,68	M6	88296001000018	1,00	62	12,3	36	8	6,3	13,2	6	161,10	06000
6,22	M8	88296001000020	1,25	74	16,6	40	10	8,3	17,8	7	188,30	08000
7,79	M10	88296001000022	1,50	79	19,9	45	12	10,3	21,3	7	210,00	10000
9,38	M12	88296001000024	1,75	89	24,9	45	14	12,3	26,6	7	262,50	12000
10,92	M14	88296001000025	2,00	102	28,5	48	16	14,3	30,4	7	296,90	14000
12,83	M16	88296001000026	2,00	102	32,4	48	18	16,3	34,4	8	335,00	16000



NEW

50 807 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEFP	EUR W1	
3,95	M5x0,5	88296002000037	0,50	55	10,2	36	6	5,3	10,8	5	173,90	05100
4,68	M6x0,75	88296002000048	0,75	62	12,2	36	8	6,3	13,0	5	177,50	06200
6,22	M8x1	88296002000070	1,00	74	16,2	40	10	8,3	17,3	6	201,00	08300
7,79	M10x1	88296002000094	1,00	79	20,1	45	12	10,3	21,5	7	224,50	10300
9,38	M12x1	88296002000111	1,00	89	24,0	45	14	12,3	25,6	7	275,20	12300
9,38	M12x1,5	88296002000113	1,50	89	24,3	45	14	12,3	25,9	7	275,20	12500
10,92	M14x1,5	88296002000131	1,50	102	28,7	48	16	14,3	30,6	7	322,40	14500
12,82	M16x1,5	88296002000147	1,50	102	31,7	48	18	16,3	33,6	8	378,40	16500

P	•
M	•
K	•
N	•
S	•
H	
O	

→ v_c/f_z Page 75



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.


Thread Milling Cutter with Chamfer Facet

SFSE  

$\leq 2xD$

 **60°**

M

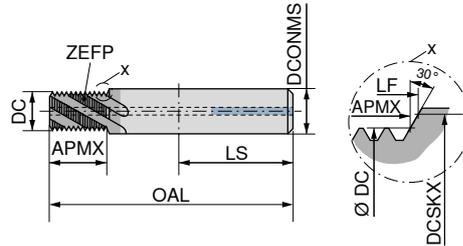

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEPF mm
4,0	M5	0,80	62	11	36	8	5,3	11,16	3
4,7	M6	1,00	62	13	36	8	6,3	13,93	3
6,5	M8	1,25	74	18	40	10	8,3	18,62	3
8,0	M10	1,50	74	22	40	10			3
10,0	M12	1,75	90	26	45	14	12,3	26,47	4
12,5	M16	2,00	100	35	48	16			4

50 811 ...

EUR	W1	
136,50		050
136,50		060
162,00		080
162,00		100 ¹⁾
250,00		120
296,30		160 ²⁾

- 1) Without chamfer
- 2) Chamfer section at the front of the tool

 **MF**

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEPF mm
6,5	M8x1	1,00	74	18	40	10	8,3	18,00	3
8,0	M10x1	1,00	74	22	40	10			3
8,0	M10x1,25	1,25	74	22	40	10			3
10,0	M12x1,25	1,25	90	26	45	14	12,3	26,61	4
10,0	M12x1,5	1,50	90	26	45	14	12,3	27,30	4
11,0	M14x1	1,00	100	31	48	16	14,3	32,70	4
11,0	M14x1,5	1,50	100	31	48	16	14,3	32,08	4
12,5	M16x1,5	1,50	100	35	48	16			4

50 816 ...

EUR	W1	
162,00		082
162,00		102 ¹⁾
162,00		103 ¹⁾
250,00		123
250,00		124
296,30		142
296,30		144
296,30		164 ²⁾

- 1) Without chamfer
- 2) Chamfer section at the front of the tool

 **G**

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEPF mm
7,6	G 1/8-28	0,907	80	20	45	12	10,0	20,97	3
11,0	G 1/4-19	1,337	100	27	48	16	13,5	28,39	4
13,0	G 3/8-19	1,337	100	34	48	16			4
16,0	G1/2-14	1,814	110	44	50	20			5

50 818 ...

EUR	W1	
223,40		018
331,00		014
331,00		038 ¹⁾
467,60		012 ¹⁾

P	•
M	•
K	•
N	•
S	•
H	•
O	•

- 1) Chamfer section at the front of the tool

→ v_c/f_z Page 71

 When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.


Thread Milling Cutter with Chamfer Facet

SFSE  IR/IL 

≤ 2xD

60° 

NPT

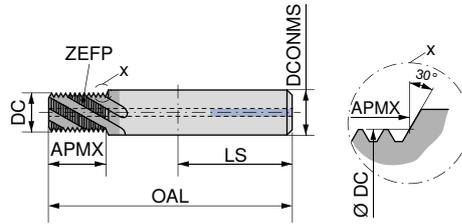

HA 

Solid carbide

50 819 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS _{h6} mm	ZEFP	EUR	W1
5,8	NPT 1/16-27	0,941	62	10	36	8	3	182,80	116 ¹⁾
7,6	NPT 1/8-27	0,941	74	10	40	10	3	211,90	018 ¹⁾
10,1	NPT 1/4-18	1,411	90	15	45	14	3	317,10	014 ¹⁾
16,0	NPT 1/2-14	1,814	110	19	50	20	5	538,10	012 ¹⁾

P	•
M	•
K	•
N	•
S	•
H	•
O	•

1) Without chamfer

→ v_c/f_z Page 71



When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 77+78.

Thread milling cutter with chamfer facet

- ▲ Profile-corrected
- ▲ Hard machining to Ø DC = 4 mm possible
- ▲ Chamfer section at end of shank


SFSE

IR/IL

≤ 2xD

60°

M

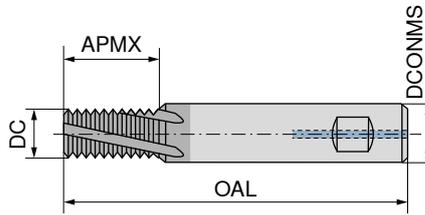

Ti500



HB Solid carbide

54 801 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR	W8
4,00	M5	0,80	11	8	62	3	137,90	050 ¹⁾
4,80	M6	1,00	13	8	62	3	137,90	060 ¹⁾
6,50	M8	1,25	18	10	74	3	157,40	080
7,95	M10	1,50	22	12	80	3	182,80	100
9,90	M12	1,75	26	14	90	4	274,40	120
11,60	M14	2,00	31	16	100	4	291,70	140
11,95	M16	2,00	35	12	90	4	198,00	160 ²⁾
13,95	M18	2,50	39	20	110	4	372,70	180 ²⁾
15,95	M20	2,50	44	16	100	4	291,70	200 ²⁾

- 1) Without Through Coolant
- 2) Chamfer section at the front of the tool

60°

MF

54 803 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR	W8
6,0	M8x1	1,00	18	10	74	3	186,40	080
8,0	M10x1	1,00	22	12	80	3	219,90	100
8,0	M10x1,25	1,25	22	12	80	3	219,90	101
9,9	M12x1	1,00	26	14	90	4	274,40	120
9,9	M12x1,25	1,25	26	14	90	4	274,40	121
9,9	M12x1,5	1,50	26	14	90	4	274,40	122
11,6	M14x1	1,00	31	16	100	4	291,70	140
11,6	M14x1,5	1,50	31	16	100	4	291,70	141
12,0	M16x1,5	1,50	35	12	90	4	219,90	160 ¹⁾
14,0	M18x1,5	1,50	39	20	110	4	372,70	180
16,0	M20x1,5	1,50	44	16	100	4	291,70	200 ¹⁾

- 1) Chamfer section at the front of the tool

55°

G

54 805 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR	W8
6,00	G 1/16-28	0,907	16	10	74	3	211,90	116
7,95	G 1/8-28	0,907	20	12	80	3	225,80	018
9,90	G 1/4-19	1,337	27	16	100	4	338,00	014
13,95	G 3/8-19	1,337	34	14	90	4	274,40	038 ¹⁾
15,95	G 1/2-14	1,814	43	16	100	4	338,00	012 ¹⁾
17,95	G 5/8-14	1,814	47	18	110	4	388,80	058 ¹⁾

P	•
M	•
K	•
N	•
S	•
H	•
O	•

- 1) Chamfer section at the front of the tool

→ v_c/f_z Page 74

Thread milling cutter with chamfer facet

- ▲ Profile-corrected
- ▲ Hard machining to Ø DC = 4 mm possible
- ▲ Chamfer section at end of shank


SFSE

IR/IL

≤ 2xD

60°

UNC

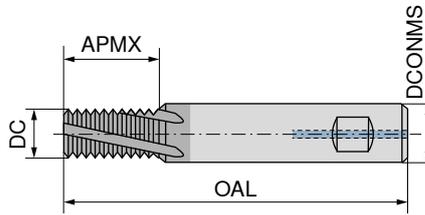

Ti500



HB Solid carbide

54 811 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR W8	
4,80	UNC 1/4-20	1,270	14	8	62	3	174,80	014 ¹⁾
5,95	UNC 5/16-18	1,411	18	10	74	3	194,50	516
7,95	UNC 3/8-16	1,588	22	12	80	3	219,90	038
7,95	UNC 7/16-14	1,814	22	14	90	3	252,20	716
9,90	UNC 1/2-13	1,954	27	14	90	4	252,20	012
11,80	UNC 9/16-12	2,117	31	16	100	4	328,70	916
12,70	UNC 5/8-11	2,309	34	14	90	4	258,10	058 ²⁾
15,20	UNC 3/4-10	2,540	38	20	110	5	372,70	034

- 1) Without Through Coolant
- 2) Chamfer section at the front of the tool

60°

UNF

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR W8	
4,80	UNF 1/4-28	0,907	14	8	62	3	174,80	014 ¹⁾
5,95	UNF 5/16-24	1,058	18	10	74	3	194,50	516
7,60	UNF 3/8-24	1,058	21	12	80	3	219,90	038
7,95	UNF 7/16-20	1,270	22	14	90	3	252,20	716
9,90	UNF 1/2-20	1,270	26	14	90	4	258,10	012
12,00	UNF 9/16-18	1,411	30	16	100	4	328,70	916
13,50	UNF 5/8-18	1,411	33	14	90	4	258,10	058 ²⁾
17,00	UNF 3/4-16	1,588	38	20	110	5	372,70	034

- 1) Without Through Coolant
- 2) Chamfer section at the front of the tool

60°

NPT

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR W8	
10,1	NPT 1/4-18	1,411	15	14	90	3	240,80	014 ¹⁾
12,8	NPT 3/8-18	1,411	15	16	100	4	246,50	038 ¹⁾
16,0	NPT 1/2-14	1,814	19	20	110	5	380,80	012 ¹⁾
18,5	NPT 3/4-14	1,814	19	20	110	5	380,80	034 ¹⁾

P	•
M	•
K	•
N	•
S	•
H	•
O	•

- 1) Chamfer section at the front of the tool → v_c/f_z Page 74

When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

Circular shank thread milling cutter


▲ Available on request from M1

SGF 

$\leq 3xD$



M

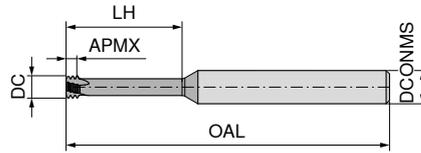

NEW
Ti600



50 802 ...

EUR	W1	
72,77		02000
72,77		03000
72,77		04000
72,77		05000
72,77		06000
72,77		08000
90,68		10000
101,90		12000

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS _{h6} mm	ZEFP
1,53	M2	0,40	39	0,80	6,0	3	3
2,37	M3	0,50	58	1,35	9,5	6	3
3,10	M4	0,70	58	1,95	12,5	6	3
3,80	M5	0,80	58	2,30	16,0	6	3
4,65	M6	1,00	58	2,70	20,0	6	3
6,00	M8	1,25	58	3,20	24,0	6	3
7,80	M10	1,50	64	3,80	31,5	8	3
9,00	M12	1,75	73	4,55	37,8	10	3

 **M** $\leq 4xD$

NEW
50 803 ...

EUR	W1	
81,90		02000
78,26		03000
78,26		04000
78,26		05000
78,26		06000
97,01		08000
97,01		10000

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS _{h6} mm	ZEFP
1,53	M2	0,40	39	1,00	10,4	3	3
2,40	M3	0,50	39	1,30	12,5	3	3
3,10	M4	0,70	58	1,80	16,7	6	3
4,00	M5	0,80	58	2,10	20,8	6	3
4,80	M6	1,00	58	2,55	25,0	6	3
6,40	M8	1,25	64	3,15	33,5	8	3
8,00	M10	1,50	76	3,85	41,5	8	3

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 74



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

Thread Milling Cutter


▲ Available on request: M30, M36, M42, M48, M56, M64

SGF

≤ 2xD

60°

M

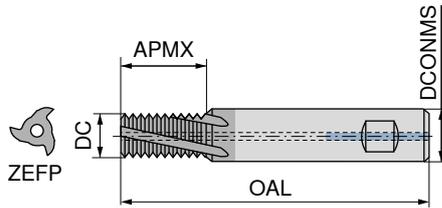

TiAlN



HA

Solid carbide

50 825 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR W1	
2,40	M3	0,50	6	4	42	3	118,00	030 ¹⁾
3,15	M4	0,70	8	6	55	3	132,00	040
4,00	M5	0,80	10	6	55	3	132,00	050
4,80	M6	1,00	12	6	55	3	132,00	060
6,00	M8	1,25	16	6	63	3	132,00	080
8,00	M10	1,50	20	8	70	3	153,80	100
9,90	M12	1,75	24	10	80	4	185,10	120
11,60	M14	2,00	28	12	90	4	223,40	140
12,00	M16	2,00	32	12	90	4	223,40	160
14,00	M18	2,50	36	14	90	4	291,70	180
14,00	M22	2,50	44	14	95	4	300,80	220
14,00	M20	2,50	40	14	90	4	291,70	200

1) Without Through Coolant

60°

MF

50 826 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	EUR W1	
3,35	M4x0,5	0,50	8	6	55	3	132,00	040
4,20	M5x0,5	0,50	10	6	55	3	132,00	050
5,00	M6x0,75	0,75	12	6	55	3	132,00	061
6,00	M8x0,75	0,75	16	6	63	3	132,00	081
6,00	M8x1	1,00	16	6	63	3	132,00	082
8,00	M10x1	1,00	20	8	70	3	153,80	102
10,00	M12x1	1,00	24	10	80	4	185,10	122
10,00	M12x1,5	1,50	24	10	80	4	185,10	124
10,00	M14x1,5	1,50	28	10	80	4	185,10	144
12,00	M16x1,5	1,50	32	12	90	4	223,40	164
14,00	M18x1,5	1,50	36	14	90	4	291,70	184
14,00	M20x1,5	1,50	40	14	90	4	291,70	204
14,00	M22x1,5	1,50	44	14	95	4	300,80	224
16,00	M24x1,5	1,50	36	16	90	5	336,70	244

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 71



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_m is used. Details on → Page 77+78.


Thread Milling Cutter

SGF  

$\leq 2xD$

 55°

G

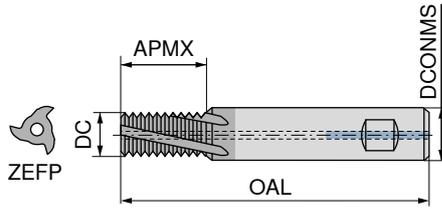

TiAlN



HA 

Solid carbide

50 827 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP
8	G 1/8-28	0,907	19,5	8	70	3
11	G 1/4-19	1,337	26,5	12	90	4
12	G 3/8-19	1,337	33,0	12	90	4
14	G 1/2-14	1,814	42,0	14	95	4
16	G 3/4-14	1,814	34,0	16	90	5
16	G 1-11	2,309	33,0	16	90	5
16	G 5/8-14	1,814	34,0	16	90	5

EUR	
W1	
162,00	018
233,70	014
233,70	038
304,40	012
352,90	034
352,90	100
352,90	058

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 71



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

7

Thread milling cutter

- ▲ Profile corrected
- ▲ Hard machining to Ø DC = 4 mm possible


SGF

IR/IL

≤ 2xD

60°

M

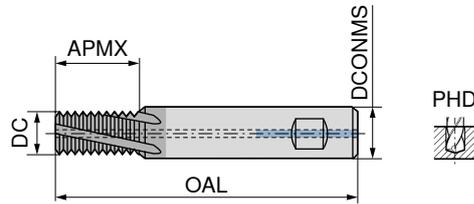

Ti500
HB
Solid carbide
54 800 ...
EUR
W8
99,65 030 ¹⁾
113,50 040 ²⁾
113,50 050 ²⁾
116,90 060 ²⁾
125,10 080
156,20 100
179,50 120
219,90 140
225,80 160
269,60 180
275,40 200

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEPF	PHD mm
2,40	M3	0,50	6,5	4	42	2	2,50
3,15	M4	0,70	9,0	6	55	3	3,30
4,00	M5	0,80	11,0	6	55	3	4,20
4,80	M6	1,00	13,0	6	55	3	5,00
6,00	M8	1,25	18,0	6	60	3	6,75
8,00	M10	1,50	21,0	8	70	3	8,50
9,90	M12	1,75	26,0	10	75	4	10,25
11,60	M14	2,00	30,0	12	85	4	12,00
12,00	M16	2,00	34,0	12	85	4	14,00
14,00	M18	2,50	40,0	14	90	4	15,50
16,00	M20	2,50	42,0	16	90	4	17,50

- 1) DIN 6535 HA Shank / Without Through Coolant
- 2) Without Through Coolant

60°

MF

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEPF	PHD mm
4,0	M5	0,50	11	6	55	3	4,50
4,8	M6	0,75	13	6	55	3	5,25
6,0	M8	1,00	18	6	60	3	7,00
8,0	M10	1,25	21	8	70	3	8,75
9,9	M12	1,00	26	10	75	4	11,00
9,9	M12	1,25	26	10	75	4	10,75
9,9	M12	1,50	26	10	75	4	10,50
11,6	M14	1,00	30	12	85	4	13,00
11,6	M14	1,50	30	12	85	4	12,50
12,0	M16	1,50	34	12	85	4	14,50
14,0	M18	1,50	40	14	90	4	16,50
16,0	M20	1,50	42	16	90	4	18,50

54 802 ...
EUR
W8
113,50 050 ¹⁾
116,90 060 ¹⁾
125,10 080
156,20 100
179,50 120
179,50 121
179,50 122
219,90 140
219,90 141
225,80 160
269,60 180
275,40 200

- 1) DIN 6535 HA Shank / Without Through Coolant

55°

G

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEPF	PHD mm
8,0	G 1/8-28	0,907	21	8	70	3	8,80
9,9	G 1/4-19	1,337	26	10	75	4	11,80
14,0	G 3/8-19	1,337	40	14	90	4	15,25
16,0	G 1/2-14	1,814	42	16	90	4	19,00

54 804 ...
EUR
W8
166,60 018
186,40 014
272,10 038
277,80 012

P	•
M	•
K	•
N	•
S	•
H	•
O	•

Thread milling cutter


▲ Profile corrected

SGF

≤ 2xD

60°

UNC

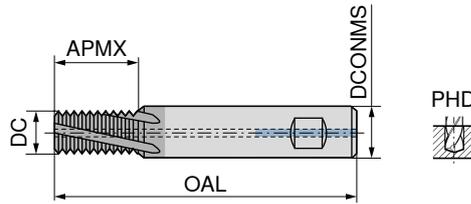

Ti500



HB

Solid carbide

54 810 ...

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	PHD mm	EUR	
4,80	UNC 1/4-20	1,270	13	6	55	3	5,1	143,60	014 ¹⁾
6,00	UNC 5/16-18	1,411	18	6	60	3	6,6	143,60	516
7,95	UNC 3/8-16	1,588	21	8	70	3	8,0	178,20	038
7,95	UNC 7/16-14	1,814	21	8	70	3	9,4	178,20	716
9,90	UNC 1/2-13	1,954	26	10	75	4	10,8	204,90	012

P	•
M	•
K	•
N	•
S	•
H	•
O	•

1) DIN 6535 HA Shank / Without Through Coolant

→ v_c/f_z Page 74

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 77+78.**

7


Thread milling cutter

▲ Profile corrected

SGF

$\leq 2xD$

UNF

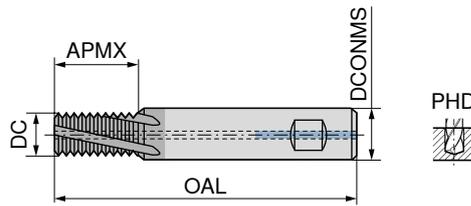

Ti500



HB

Solid carbide
54 812 ...
EUR
W8

DC mm	Thread	TP mm	APMX mm	DCONMS _{h6} mm	OAL mm	ZEFP	PHD mm		
4,8	UNF 1/4-28	0,907	13	6	55	3	5,5	143,60	014 ¹⁾
6,0	UNF 5/16-24	1,058	18	6	60	3	6,9	143,60	516
8,0	UNF 3/8-24	1,058	21	8	70	3	8,5	178,20	038
8,0	UNF 7/16-20	1,270	21	8	70	3	9,9	178,20	716
9,9	UNF 1/2-20	1,270	26	10	75	4	11,5	204,90	012

P	•
M	•
K	•
N	•
S	•
H	•
O	•

1) Without Through Coolant

→ v_c/f_z Page 74



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_m is used. Details on → Page 77+78.


Thread milling cutter

SGF  

≤ 2xD

60° 

M 

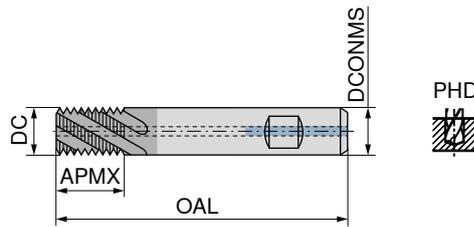

Ti500



HB 

Solid carbide

54 832 ...

DC mm	TP mm	APMX mm	DCONMS _{n6} mm	OAL mm	ZEFP mm	PHD mm	Price	Code
8	0,50	12	8	70	3	10	140,00	008
8	0,75	12	8	70	3	11	140,00	080
10	1,00	16	10	75	4	14	145,70	100
10	1,50	16	10	75	4	14	145,70	101
12	1,00	20	12	85	4	16	169,10	120
12	1,50	20	12	85	4	16	169,10	121
12	2,00	20	12	85	4	18	169,10	122
16	1,00	25	16	90	5	22	235,00	160
16	1,50	25	16	90	5	22	235,00	161
16	2,00	25	16	90	5	22	235,00	162
16	3,00	25	16	90	5	24	235,00	164

P	•
M	•
K	•
N	•
S	•
H	•
O	•

→ v_c/f_z Page 72



When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 77+78.

7

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment	Tensile strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C Annealed	420 N/mm ² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C Annealed	640 N/mm ² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3	< 0,45 % C Tempered	840 N/mm ² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C Annealed	910 N/mm ² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5	< 0,75 % C Tempered	1010 N/mm ² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1	Annealed	610 N/mm ² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2	Tempered	930 N/mm ² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3	Tempered	1010 N/mm ² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4	Tempered	1200 N/mm ² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1	Annealed	680 N/mm ² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2	Hardened and tempered	1100 N/mm ² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3	Hardened and tempered	1300 N/mm ² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic Annealed	680 N/mm ² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic Tempered	1010 N/mm ² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic Quenched	610 N/mm ² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)	780 N/mm ² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic	350 N/mm ² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)	500 N/mm ² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic	540 N/mm ² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic	845 N/mm ² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic	440 N/mm ² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic	780 N/mm ² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable	60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable Age-hardened	340 N/mm ² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable	250 N/mm ² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable Age-hardened	300 N/mm ² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable	440 N/mm ² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %	375 N/mm ² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn	300 N/mm ² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper	340 N/mm ² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys	70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis Annealed	680 N/mm ² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2	Fe - basis Age-hardened	950 N/mm ² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis Annealed	840 N/mm ² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2	Ni or Co basis Age-hardened	1180 N/mm ² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3	Ni or Co basis Cast	1080 N/mm ² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium	400 N/mm ²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys Age-hardened	1050 N/mm ² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys	1400 N/mm ² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1	Hardened and tempered	46-55 HRC				
		H.1.2	Hardened and tempered	56-60 HRC				
		H.1.3	Hardened and tempered	61-65 HRC				
		H.1.4	Hardened and tempered	66-70 HRC				
	Chilled iron	H.2.1	Cast	400 HB				
	Hardened cast iron	H.3.1	Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic	≤ 150 N/mm ²				
		O.1.2	Plastics, thermoplastic	≤ 100 N/mm ²				
		O.2.1	Aramid fibre-reinforced	≤ 1000 N/mm ²				
		O.2.2	Glass/carbon-fibre reinforced	≤ 1000 N/mm ²				
		O.3.1	Graphite					

* Tensile strength

Cutting data standard values

Index	ZBGF H VHM 2xD 50 840 ...				SFSE VHM TiAlN 50 811 ..., 50 816 ..., 50 818 ..., 50 819 ...			SGF VHM TiAlN 50 825 ..., 50 826 ..., 50 827 ...		
	v_c m/min	$\emptyset 3-5$ f_z [mm/tooth]	$\emptyset 6-10$ f_z [mm/tooth]	$\emptyset 12-16$ f_z [mm/tooth]	v_c m/min	$\emptyset 6-10$ f_z [mm/tooth]	$\emptyset 12-20$ f_z [mm/tooth]	v_c m/min	$\emptyset 6-10$ f_z [mm/tooth]	$\emptyset 12-20$ f_z [mm/tooth]
P.1.1					150	0,06	0,10	150	0,06	0,10
P.1.2					130	0,06	0,10	130	0,06	0,10
P.1.3					110	0,06	0,10	110	0,06	0,10
P.1.4					110	0,05	0,07	110	0,05	0,07
P.1.5					100	0,05	0,07	100	0,05	0,07
P.2.1					120	0,06	0,10	120	0,06	0,10
P.2.2					110	0,05	0,07	110	0,05	0,07
P.2.3					100	0,05	0,07	100	0,05	0,07
P.2.4					80	0,04	0,06	80	0,04	0,06
P.3.1					80	0,06	0,10	80	0,06	0,10
P.3.2					70	0,05	0,07	70	0,05	0,07
P.3.3					60	0,04	0,06	60	0,04	0,06
P.4.1					80	0,06	0,10	80	0,06	0,10
P.4.2					70	0,06	0,10	70	0,06	0,10
M.1.1					70	0,04	0,06	70	0,04	0,06
M.2.1					50	0,03	0,05	50	0,03	0,05
M.3.1					50	0,03	0,05	50	0,03	0,05
K.1.1					150	0,07	0,12	150	0,07	0,12
K.1.2					130	0,07	0,12	130	0,07	0,12
K.2.1					130	0,05	0,07	130	0,05	0,07
K.2.2					110	0,05	0,07	110	0,05	0,07
K.3.1					120	0,06	0,10	120	0,06	0,10
K.3.2					100	0,06	0,10	100	0,06	0,10
N.1.1					210	0,085	0,15	210	0,085	0,15
N.1.2					180	0,07	0,12	180	0,07	0,12
N.2.1					130	0,07	0,12	130	0,07	0,12
N.2.2					130	0,07	0,12	130	0,07	0,12
N.2.3					120	0,07	0,12	120	0,07	0,12
N.3.1					180	0,085	0,15	180	0,085	0,15
N.3.2					180	0,085	0,15	180	0,085	0,15
N.3.3					130	0,085	0,15	130	0,085	0,15
N.4.1					150	0,085	0,15	150	0,085	0,15
S.1.1					60	0,03	0,05	60	0,03	0,05
S.1.2	80	0,01	0,03	0,03						
S.2.1	60	0,01	0,02	0,02						
S.2.2	60	0,01	0,02	0,02						
S.2.3	60	0,01	0,02	0,02						
S.3.1					70	0,03	0,05	70	0,03	0,05
S.3.2	80	0,01	0,03	0,03						
S.3.3	60	0,01	0,02	0,02						
H.1.1	80	0,01	0,03	0,03						
H.1.2	60	0,01	0,02	0,02						
H.1.3	40	0,005	0,01	0,01						
H.1.4										
H.2.1	100	0,03	0,04	0,04						
H.3.1	60	0,01	0,02	0,02						
O.1.1					240	0,10	0,16	240	0,10	0,16
O.1.2					240	0,10	0,16	240	0,10	0,16
O.2.1					130	0,05	0,07	130	0,05	0,07
O.2.2					130	0,05	0,07	130	0,05	0,07
O.3.1	180	0,04	0,05	0,08	110	0,05	0,07	110	0,05	0,07

7



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values

Index	MWN uncoated 50 890 ..., 50 891 ..., 50 892 ..., 50 895 ..., 50 896 ..., 50 897 ...		MWN TiAlN 50 890 ..., 50 891 ..., 50 895 ...		EAW / EWM 50 860 ..., 50 861 ..., 50 867 ..., 50 868 ..., 50 870 ..., 50 871 ...			SGF VHM Ti500 54 832 ...		
	V _c m/min	f _z [mm/tooth]	V _c m/min	f _z [mm/tooth]	V _c m/min	EAW		V _c m/min	8 mm	
						f _z [mm/tooth]	f _z [mm/tooth]		f _z [mm/tooth]	f _z [mm/tooth]
P.1.1	85	0,10	170	0,10	280	0,20	0,20	150	0,03–0,07	0,05–0,15
P.1.2	75	0,10	150	0,10	240	0,20	0,20	150	0,03–0,07	0,05–0,15
P.1.3	65	0,10	130	0,10	200	0,20	0,20	120	0,03–0,07	0,05–0,10
P.1.4	65	0,07	130	0,07	200	0,15	0,15	120	0,03–0,06	0,04–0,06
P.1.5	60	0,07	120	0,07	180	0,15	0,15	120	0,03–0,06	0,04–0,06
P.2.1	70	0,10	140	0,10	220	0,20	0,20	120	0,03–0,06	0,04–0,06
P.2.2	65	0,07	130	0,07	200	0,15	0,15	120	0,03–0,06	0,04–0,06
P.2.3	60	0,07	120	0,07	180	0,15	0,15	80	0,03–0,06	0,04–0,06
P.2.4	45	0,06	90	0,06	150	0,12	0,12	70	0,03–0,06	0,04–0,06
P.3.1	45	0,10	90	0,10	150	0,20	0,20	80	0,03–0,06	0,04–0,06
P.3.2	40	0,07	80	0,07	130	0,10	0,10	70	0,03–0,06	0,04–0,06
P.3.3	35	0,06	70	0,06	110	0,10	0,10	60	0,03–0,06	0,04–0,06
P.4.1	45	0,10	90	0,10	150	0,20	0,20	50	0,03–0,06	0,04–0,06
P.4.2	40	0,10	80	0,10	130	0,20	0,20	50	0,03–0,06	0,04–0,06
M.1.1	40	0,06	80	0,06	130	0,10	0,10	120	0,04–0,07	0,05–0,12
M.2.1	30	0,05	60	0,05	90	0,08	0,08	120	0,04–0,07	0,05–0,12
M.3.1	30	0,05	60	0,05	90	0,08	0,08	120	0,04–0,07	0,05–0,12
K.1.1	85	0,12	170	0,12	280	0,25	0,25	140	0,04–0,07	0,07–0,15
K.1.2	75	0,12	150	0,12	240	0,25	0,25	100	0,04–0,07	0,07–0,15
K.2.1	75	0,07	150	0,07	240	0,15	0,15	140	0,04–0,07	0,07–0,15
K.2.2	65	0,07	130	0,07	200	0,15	0,15	120	0,04–0,07	0,07–0,15
K.3.1	70	0,10	140	0,10	220	0,20	0,20	140	0,04–0,07	0,07–0,15
K.3.2	60	0,10	120	0,10	190	0,20	0,20	100	0,04–0,07	0,07–0,15
N.1.1	120	0,15	240	0,15	390	0,30	0,30	400	0,05–0,08	0,07–0,15
N.1.2	105	0,12	210	0,12	330	0,25	0,25	350	0,05–0,08	0,07–0,15
N.2.1	75	0,12	150	0,12	240	0,25	0,25	350	0,05–0,08	0,07–0,15
N.2.2	75	0,12	150	0,12	240	0,25	0,25	250	0,05–0,08	0,07–0,15
N.2.3	70	0,12	140	0,12	220	0,25	0,25	200	0,05–0,08	0,07–0,15
N.3.1	105	0,15	210	0,15	330	0,30	0,30	160	0,05–0,08	0,07–0,15
N.3.2	105	0,15	210	0,15	330	0,30	0,30	160	0,05–0,08	0,07–0,15
N.3.3	75	0,15	150	0,15	240	0,30	0,30	160	0,05–0,08	0,07–0,15
N.4.1	85	0,15	170	0,15	280	0,30	0,30	160	0,05–0,08	0,07–0,15
S.1.1					110	0,10	0,10	100	0,02–0,04	0,04–0,10
S.1.2					90	0,07	0,07	80	0,02–0,04	0,04–0,10
S.2.1					70	0,05	0,05	60	0,03–0,05	0,04–0,06
S.2.2					70	0,05	0,05	40	0,03–0,05	0,04–0,06
S.2.3					70	0,05	0,05	40	0,03–0,05	0,04–0,06
S.3.1					130	0,10	0,10	100	0,02–0,04	0,04–0,10
S.3.2					90	0,07	0,07	80	0,03–0,05	0,04–0,06
S.3.3					70	0,05	0,05	60	0,03–0,05	0,04–0,06
H.1.1					80	0,05	0,05	60	0,01–0,02	0,03–0,05
H.1.2					60	0,04	0,04	50	0,01–0,02	0,03–0,05
H.1.3								40	0,01–0,02	0,03–0,05
H.1.4								30	0,01–0,02	0,03–0,05
H.2.1					80	0,05	0,05	60	0,01–0,02	0,03–0,05
H.3.1					60	0,04	0,04	50	0,01–0,02	0,03–0,05
O.1.1	140	0,16						180	0,05–0,10	0,07–0,25
O.1.2	140	0,16						220	0,05–0,10	0,07–0,25
O.2.1	75	0,07						120	0,05–0,10	0,07–0,25
O.2.2	75	0,07						120	0,05–0,10	0,07–0,25
O.3.1			130	0,07	200	0,14	0,14	400	0,05–0,10	0,07–0,25



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values

Index	GZG / GZD 50 863 ..., 50 864 ..., 50 887 ..., 50 885 ..., 50 888 ..., 50 889 ..., 50 894 ...			Polygon 50 872 ..., 50 874 ..., 50 875 ..., 50 876 ..., 50 879 ..., 50 880 ..., 50 881 ..., 50 882 ..., 50 883 ..., 50 884 ..., 50 886 ...		System 300 50 851 ..., 50 852 ..., 50 853 ..., 50 855 ..., 50 857 ..., 50 858 ..., 50 859 ...	
	v _c m/min	12-17 mm	20-26 mm	v _c m/min	f _z [mm/tooth]	v _c m/min	f _z [mm/tooth]
		f _z [mm/tooth]	f _z [mm/tooth]				
P.1.1	220	0,10-0,30	0,05-0,30	220	0,05-0,25	220	0,05-0,15
P.1.2	220	0,10-0,30	0,05-0,30	220	0,05-0,25	220	0,05-0,15
P.1.3	190	0,10-0,30	0,05-0,30	190	0,05-0,25	190	0,05-0,15
P.1.4	160	0,10-0,30	0,05-0,30	160	0,05-0,25	160	0,05-0,15
P.1.5	160	0,10-0,30	0,05-0,30	160	0,05-0,25	160	0,05-0,15
P.2.1	150	0,10-0,30	0,05-0,30	150	0,05-0,25	150	0,05-0,15
P.2.2	120	0,10-0,30	0,05-0,30	120	0,05-0,25	120	0,05-0,15
P.2.3	100	0,10-0,30	0,05-0,30	100	0,05-0,25	100	0,05-0,15
P.2.4	90	0,10-0,30	0,05-0,30	90	0,05-0,25	90	0,05-0,15
P.3.1	100	0,10-0,20	0,05-0,20	100	0,05-0,20	100	0,05-0,12
P.3.2	90	0,10-0,20	0,05-0,20	90	0,05-0,20	90	0,05-0,12
P.3.3	80	0,10-0,20	0,05-0,20	80	0,05-0,20	80	0,05-0,12
P.4.1	70	0,10-0,20	0,05-0,20	70	0,05-0,20	70	0,05-0,12
P.4.2	60	0,10-0,20	0,05-0,20	60	0,05-0,20	60	0,05-0,12
M.1.1	130	0,10-0,30	0,05-0,30	130	0,05-0,25	130	0,05-0,15
M.2.1	120	0,10-0,30	0,05-0,30	120	0,05-0,25	120	0,05-0,15
M.3.1	120	0,10-0,30	0,05-0,30	120	0,05-0,25	120	0,05-0,15
K.1.1	140	0,10-0,30	0,05-0,30	140	0,05-0,25	140	0,05-0,15
K.1.2	100	0,10-0,30	0,05-0,30	100	0,05-0,25	100	0,05-0,15
K.2.1	140	0,10-0,30	0,05-0,30	140	0,05-0,25	140	0,05-0,15
K.2.2	120	0,10-0,30	0,05-0,30	120	0,05-0,25	120	0,05-0,15
K.3.1	140	0,10-0,30	0,05-0,30	140	0,05-0,25	140	0,05-0,15
K.3.2	100	0,10-0,30	0,05-0,30	100	0,05-0,25	100	0,05-0,15
N.1.1	700	0,10-0,40	0,05-0,40	700	0,15-0,40	700	0,10-0,25
N.1.2	400	0,10-0,40	0,05-0,40	400	0,15-0,40	400	0,10-0,25
N.2.1	400	0,10-0,40	0,05-0,40	400	0,15-0,40	400	0,10-0,25
N.2.2	300	0,10-0,40	0,05-0,40	300	0,15-0,40	300	0,10-0,25
N.2.3	200	0,10-0,40	0,05-0,40	200	0,15-0,40	200	0,10-0,25
N.3.1	160	0,10-0,40	0,05-0,40	160	0,15-0,40	160	0,10-0,25
N.3.2	160	0,10-0,40	0,05-0,40	160	0,15-0,40	160	0,10-0,25
N.3.3	160	0,10-0,40	0,05-0,40	160	0,15-0,40	160	0,10-0,25
N.4.1	160	0,10-0,40	0,05-0,40	160	0,15-0,40	160	0,10-0,25
S.1.1				100	0,01-0,15	100	0,01-0,12
S.1.2				80	0,01-0,15	80	0,01-0,12
S.2.1				60	0,01-0,15	60	0,01-0,12
S.2.2				40	0,01-0,15	40	0,01-0,12
S.2.3				40	0,01-0,15	40	0,01-0,12
S.3.1				100	0,01-0,15	100	0,01-0,12
S.3.2				80	0,01-0,15	80	0,01-0,12
S.3.3				60	0,01-0,15	60	0,01-0,12
H.1.1				60	0,01-0,10	60	0,01-0,10
H.1.2				50	0,01-0,10	50	0,01-0,10
H.1.3				40	0,01-0,10	40	0,01-0,10
H.1.4				30	0,01-0,10	30	0,01-0,10
H.2.1				60	0,01-0,10	60	0,01-0,10
H.3.1				50	0,01-0,10	50	0,01-0,10
O.1.1				180	0,05-0,25	180	0,05-0,15
O.1.2				220	0,05-0,25	220	0,05-0,15
O.2.1				120	0,05-0,25	120	0,05-0,15
O.2.2				120	0,05-0,25	120	0,05-0,15
O.3.1				800	0,05-0,25	800	0,05-0,15

7



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values

Index	SFSE / SGF VHM Ti500 54 800 ..., 54 801 ..., 54 802 ..., 54 803 ..., 54 804 ..., 54 805 ..., 54 809 ..., 54 810 ..., 54 811 ..., 54 812 ..., 54 813 ...				Circular shank thread milling cutter 50 802 ..., 50 803 ...				
	v _c m/min	Ø 2,4-3,15	Ø 4	Ø 4,8-16	v _c m/min	Ø 1-2	Ø 3-5	Ø 6-8	Ø 9-12
		f _z [mm/tooth]	f _z [mm/tooth]	f _z [mm/tooth]		f _z [mm/tooth]	f _z [mm/tooth]	f _z [mm/tooth]	f _z [mm/tooth]
P.1.1	150	0,03-0,04	0,03-0,06	0,05-0,15	110	0,05	0,09	0,14	0,16
P.1.2	150	0,03-0,04	0,03-0,06	0,05-0,15	110	0,05	0,09	0,14	0,16
P.1.3	120	0,02-0,03	0,02-0,06	0,05-0,10	110	0,05	0,09	0,14	0,16
P.1.4	120	0,01-0,02	0,03-0,05	0,04-0,06	110	0,05	0,09	0,14	0,16
P.1.5	120	0,01-0,02	0,03-0,05	0,04-0,06	110	0,05	0,09	0,14	0,16
P.2.1	120	0,01-0,02	0,03-0,05	0,04-0,06	80	0,04	0,08	0,12	0,14
P.2.2	120	0,01-0,02	0,03-0,05	0,04-0,06	80	0,04	0,08	0,12	0,14
P.2.3	80	0,01-0,02	0,03-0,05	0,04-0,06	80	0,04	0,08	0,12	0,14
P.2.4	70	0,01-0,02	0,03-0,05	0,04-0,06	80	0,04	0,08	0,12	0,14
P.3.1	80	0,01-0,02	0,03-0,05	0,04-0,06	60	0,04	0,08	0,12	0,14
P.3.2	70	0,01-0,02	0,03-0,05	0,04-0,06	60	0,04	0,08	0,12	0,14
P.3.3	60	0,01-0,02	0,03-0,05	0,04-0,06	60	0,04	0,08	0,12	0,14
P.4.1	50	0,01-0,02	0,03-0,05	0,04-0,06	60	0,04	0,08	0,12	0,14
P.4.2	50	0,01-0,02	0,03-0,05	0,04-0,06	80	0,04	0,08	0,12	0,14
M.1.1	120	0,03-0,04	0,03-0,04	0,05-0,12	80	0,04	0,05	0,07	0,10
M.2.1	120	0,03-0,04	0,03-0,04	0,05-0,12	80	0,04	0,05	0,07	0,10
M.3.1	120	0,03-0,04	0,03-0,04	0,05-0,12	80	0,04	0,05	0,07	0,10
K.1.1	140	0,03-0,07	0,03-0,07	0,07-0,12	50	0,05	0,09	0,14	0,16
K.1.2	100	0,03-0,07	0,03-0,07	0,07-0,12	50	0,05	0,09	0,14	0,16
K.2.1	140	0,03-0,07	0,03-0,07	0,07-0,12	50	0,05	0,09	0,14	0,16
K.2.2	120	0,03-0,07	0,03-0,07	0,07-0,10	50	0,05	0,09	0,14	0,16
K.3.1	140	0,03-0,07	0,03-0,07	0,07-0,10	50	0,05	0,09	0,14	0,16
K.3.2	100	0,03-0,07	0,03-0,07	0,07-0,10	50	0,05	0,09	0,14	0,16
N.1.1	400	0,05-0,07	0,05-0,07	0,07-0,15	130	0,05	0,09	0,14	0,16
N.1.2	350	0,05-0,07	0,05-0,07	0,07-0,15	130	0,05	0,09	0,14	0,16
N.2.1	350	0,05-0,07	0,05-0,07	0,07-0,15	120	0,04	0,05	0,07	0,10
N.2.2	250	0,05-0,07	0,05-0,07	0,07-0,15	100	0,04	0,05	0,07	0,10
N.2.3	200	0,05-0,07	0,05-0,07	0,07-0,15	100	0,04	0,05	0,07	0,10
N.3.1	160	0,05-0,07	0,05-0,07	0,07-0,15	130	0,05	0,09	0,14	0,16
N.3.2	160	0,05-0,07	0,05-0,07	0,07-0,15	130	0,05	0,09	0,14	0,16
N.3.3	160	0,05-0,07	0,05-0,07	0,07-0,15	130	0,05	0,09	0,14	0,16
N.4.1	160	0,05-0,07	0,05-0,07	0,07-0,15	110	0,04	0,05	0,07	0,10
S.1.1	100	0,02-0,04	0,02-0,04	0,04-0,10	30	0,03	0,04	0,06	0,07
S.1.2	80	0,02-0,04	0,02-0,04	0,04-0,10	30	0,03	0,04	0,06	0,07
S.2.1	60	0,01-0,02	0,03-0,05	0,04-0,06	30	0,03	0,04	0,06	0,07
S.2.2	40	0,01-0,02	0,03-0,05	0,04-0,06	30	0,03	0,04	0,06	0,07
S.2.3	40	0,01-0,02	0,03-0,05	0,04-0,06	30	0,03	0,04	0,06	0,07
S.3.1	100	0,02-0,04	0,02-0,04	0,04-0,10	30	0,03	0,04	0,06	0,07
S.3.2	80	0,01-0,02	0,03-0,05	0,04-0,06	30	0,03	0,04	0,06	0,07
S.3.3	60	0,01-0,02	0,03-0,05	0,04-0,06	30	0,03	0,04	0,06	0,07
H.1.1	60		0,01-0,02	0,03-0,05					
H.1.2	50		0,01-0,02	0,03-0,05					
H.1.3	40		0,01-0,02	0,03-0,05					
H.1.4	30		0,01-0,02	0,03-0,05					
H.2.1	60		0,01-0,02	0,03-0,05					
H.3.1	50		0,01-0,02	0,03-0,05					
O.1.1	180	0,01-0,05	0,05-0,10	0,07-0,25	150	0,06	0,12	0,19	0,19
O.1.2	220	0,01-0,05	0,05-0,10	0,07-0,25	150	0,06	0,12	0,19	0,19
O.2.1	120	0,01-0,05	0,05-0,10	0,07-0,25	150	0,06	0,12	0,19	0,19
O.2.2	120	0,01-0,05	0,05-0,10	0,07-0,25	150	0,06	0,12	0,19	0,19
O.3.1	400	0,01-0,05	0,05-0,10	0,07-0,25	100	0,05	0,09	0,14	0,14



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. ±20% according to the usage conditions.

Cutting data standard values

Index	M/MF-BGF 2xD/2,5xD 50 854 ..., 50 862 ..., 50 869 ..., 50 898 ...						HPC solid carbide thread milling cutters 50 806 ..., 50 807 ...				SFSE Micro VHM 50 804 ...	
	v_c TiAlN	v_c uncoated	$\leq \emptyset 6$	$\leq \emptyset 12$	$\leq \emptyset 6$	$\leq \emptyset 12$	v_c	$\emptyset 3-5$	$\emptyset 6-10$	$\emptyset 10-13$	v_c	$\emptyset 0,7-2,1$
	m/min	m/min	f_s [mm/tooth]	*	f_s [mm/tooth]	m/min	f_s [mm/tooth]	f_s [mm/tooth]	f_s [mm/tooth]	m/min	f_s [mm/tooth]	
P.1.1							100-140	0,015-0,03	0,04-0,06	0,06-0,10	20-40	0,01-0,02
P.1.2							100-120	0,015-0,03	0,04-0,06	0,06-0,10	20-40	0,01-0,02
P.1.3							80-100	0,015-0,02	0,03-0,05	0,03-0,07	20-40	0,01-0,02
P.1.4							80-100	0,015-0,02	0,02-0,04	0,03-0,05	20-40	0,01-0,02
P.1.5							80-100	0,015-0,02	0,02-0,03	0,03-0,04	20-40	0,01-0,02
P.2.1							100-120	0,015-0,03	0,04-0,06	0,06-0,10	20-40	0,01-0,02
P.2.2							80-100	0,015-0,03	0,02-0,05	0,03-0,07	20-40	0,01-0,02
P.2.3							80-100	0,015-0,02	0,02-0,03	0,03-0,04	20-40	0,01-0,02
P.2.4							80-100	0,015-0,02	0,02-0,03	0,03-0,04	20-40	0,01-0,02
P.3.1							100-120	0,015-0,03	0,04-0,06	0,06-0,10	20-40	0,01-0,02
P.3.2							80-100	0,015-0,02	0,02-0,03	0,03-0,04	20-40	0,01-0,02
P.3.3							80-100	0,015-0,02	0,02-0,03	0,03-0,04	20-40	0,01-0,02
P.4.1							60-80	0,015-0,03	0,04-0,06	0,06-0,10	20-40	0,01-0,02
P.4.2							60-80	0,015-0,03	0,04-0,06	0,06-0,10	20-40	0,01-0,02
M.1.1							60-80	0,015-0,03	0,04-0,06	0,06-0,10	20-30	0,01-0,02
M.2.1							60-80	0,015-0,03	0,04-0,06	0,06-0,10	20-30	0,01-0,02
M.3.1							60-80	0,015-0,03	0,04-0,06	0,06-0,10	20-30	0,01-0,02
K.1.1	80-120	50-80	0,10-0,15	0,15-0,22	0,02-0,05	0,05-0,10	100-120	0,02-0,04	0,04-0,08	0,06-0,10		
K.1.2	80-120	50-80	0,10-0,15	0,15-0,22	0,02-0,05	0,05-0,10	100-120	0,02-0,04	0,04-0,08	0,06-0,10		
K.2.1							100-120	0,02-0,04	0,04-0,08	0,06-0,10		
K.2.2							80-100	0,02-0,04	0,04-0,08	0,06-0,10		
K.3.1							80-100	0,02-0,04	0,04-0,08	0,06-0,08		
K.3.2							80-100	0,02-0,04	0,04-0,08	0,06-0,08		
N.1.1	100-400	100-400	0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
N.1.2	100-400	100-400	0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
N.2.1	100-300		0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
N.2.2	100-400	100-400	0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
N.2.3	100-160		0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
N.3.1	100-300	100-300	0,10-0,30	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
N.3.2											30-50	0,02-0,03
N.3.3											30-50	0,02-0,03
N.4.1	100-400	100-400	0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10					30-50	0,02-0,03
S.1.1											20-30	0,01-0,02
S.1.2											20-30	0,01-0,02
S.2.1											20-30	0,01-0,02
S.2.2											20-30	0,01-0,015
S.2.3											20-30	0,01-0,015
S.3.1							60-80	0,015-0,02	0,02-0,03	0,03-0,04	20-30	0,01-0,02
S.3.2							60-80	0,01-0,015	0,015-0,02	0,025-0,035	20-30	0,01-0,015
S.3.3											20-30	0,01-0,015
H.1.1											20-30	0,01-0,015
H.1.2											20-30	0,01-0,015
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1	60-100	60-100	0,10-0,25	0,25-0,30	0,03-0,06	0,06-0,10						
O.1.2												
O.2.1												
O.2.2												
O.3.1												

* f_s = drilling feed rate in mm / rev

Cutting data standard values

Index	MiniMill			MicroMill	
	53 006 ..., 53 007 ..., 53 008 ..., 53 009 ..., 53 010 ..., 53 011 ..., 53 012 ..., 53 013 ..., 53 015 ...			53 050 ..., 53 051 ..., 53 052 ..., 53 053 ...	
	v_c m/min	f_z (drilling) [mm/tooth]	f_z (Threading) [mm/tooth]	v_c m/min	f_z [mm/tooth]
P.1.1	120 (80-200)	0,03-0,10	0,05-0,20	70 (40-120)	0,01-0,05
P.1.2	110 (70-190)	0,03-0,10	0,05-0,20	60 (40-110)	0,01-0,05
P.1.3	90 (60-150)	0,03-0,10	0,05-0,20	50 (30-80)	0,01-0,05
P.1.4	90 (60-150)	0,03-0,08	0,05-0,18	50 (30-80)	0,01-0,05
P.1.5	70 (50-120)	0,03-0,08	0,05-0,18	40 (30-70)	0,01-0,05
P.2.1	90 (60-150)	0,03-0,10	0,05-0,20	50 (30-80)	0,01-0,05
P.2.2	70 (50-120)	0,03-0,08	0,05-0,18	40 (30-70)	0,01-0,05
P.2.3	60 (40-110)	0,02-0,07	0,05-0,16	40 (20-70)	0,01-0,05
P.2.4	60 (40-100)	0,03-0,07	0,05-0,16	30 (20-60)	0,01-0,04
P.3.1	60 (40-100)	0,03-0,10	0,05-0,20	30 (20-60)	0,01-0,05
P.3.2	50 (30-80)	0,02-0,07	0,05-0,16	30 (20-50)	0,01-0,04
P.3.3	30 (20-60)	0,02-0,07	0,05-0,16	20 (10-40)	0,005-0,03
P.4.1	80 (50-130)	0,03-0,08	0,05-0,18	40 (30-70)	0,01-0,05
P.4.2	60 (40-110)	0,02-0,07	0,05-0,16	40 (20-70)	0,01-0,05
M.1.1	90 (60-150)	0,02-0,07	0,05-0,16	50 (30-80)	0,01-0,03
M.2.1	60 (40-110)	0,02-0,07	0,05-0,16	40 (20-70)	0,01-0,03
M.3.1	50 (30-90)	0,02-0,07	0,05-0,16	30 (20-50)	0,01-0,03
K.1.1	110 (70-190)	0,03-0,10	0,05-0,20	60 (40-110)	0,008-0,06
K.1.2	80 (50-140)	0,03-0,10	0,05-0,20	50 (30-80)	0,008-0,06
K.2.1	70 (50-120)	0,03-0,10	0,05-0,20	40 (30-70)	0,008-0,06
K.2.2	60 (40-100)	0,03-0,10	0,05-0,20	30 (20-60)	0,008-0,06
K.3.1	110 (70-190)	0,03-0,10	0,05-0,20	60 (40-110)	0,008-0,06
K.3.2	90 (60-160)	0,03-0,10	0,05-0,20	50 (30-90)	0,008-0,06
N.1.1	230 (150-390)	0,04-0,15	0,06-0,25	150 (90-260)	0,01-0,06
N.1.2	220 (140-370)	0,04-0,15	0,06-0,25	140 (90-240)	0,01-0,06
N.2.1	190 (120-320)	0,04-0,15	0,06-0,25	120 (70-210)	0,01-0,06
N.2.2	160 (110-270)	0,04-0,15	0,06-0,25	100 (60-180)	0,01-0,06
N.2.3	90 (60-160)	0,04-0,15	0,06-0,25	60 (40-110)	0,01-0,06
N.3.1	170 (110-280)	0,04-0,15	0,06-0,25	110 (70-180)	0,01-0,06
N.3.2	140 (90-240)	0,04-0,15	0,06-0,25	80 (50-150)	0,01-0,06
N.3.3	120 (80-210)	0,04-0,15	0,06-0,25	80 (50-140)	0,01-0,06
N.4.1	170 (110-280)	0,04-0,15	0,06-0,25	70 (40-120)	0,01-0,06
S.1.1	60 (40-100)	0,04-0,15	0,06-0,25	30 (20-50)	0,01-0,06
S.1.2	40 (30-70)	0,04-0,15	0,06-0,25	20 (10-30)	0,01-0,06
S.2.1	60 (40-100)	0,04-0,15	0,06-0,25	30 (20-50)	0,01-0,06
S.2.2	50 (30-80)	0,04-0,15	0,06-0,25	20 (10-40)	0,01-0,06
S.2.3	30 (20-60)	0,04-0,15	0,06-0,25	20 (10-30)	0,01-0,06
S.3.1	60 (40-100)	0,04-0,15	0,06-0,25	20 (10-40)	0,01-0,06
S.3.2	30 (20-60)	0,04-0,15	0,06-0,25	20 (10-30)	0,01-0,06
S.3.3	30 (20-50)	0,04-0,15	0,06-0,25	10 (10-20)	0,01-0,06
H.1.1	50 (30-90)	0,02-0,06	0,04-0,14	20 (10-40)	0,005-0,03
H.1.2					
H.1.3					
H.1.4					
H.2.1					
H.3.1	40 (30-70)	0,02-0,10		20 (10-40)	0,005-0,03
O.1.1	180 (120-310)	0,04-0,15	0,06-0,25	80 (50-130)	0,02-0,09
O.1.2	170 (110-280)	0,04-0,15	0,06-0,25	70 (40-120)	0,02-0,09
O.2.1	140 (90-230)	0,04-0,15	0,06-0,25	50 (30-100)	0,02-0,09
O.2.2	100 (70-170)	0,04-0,15	0,06-0,25	40 (30-70)	0,02-0,09
O.3.1	140 (90-230)	0,005-0,05	0,06-0,25	60 (40-110)	0,02-0,09




The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Milling Procedures

Climb milling

Characteristics:




- ① Tool rotation direction „right“
- ② Toolpath counter clockwise
- ③ Feed direction „outwards“

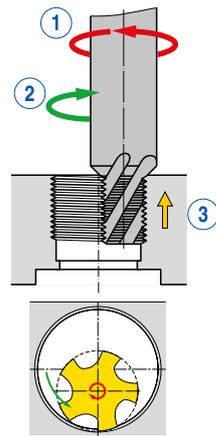

Conventional milling


Characteristics:

- ① Tool rotation direction „right“
- ② Toolpath clockwise
- ③ Feed direction „inwards“

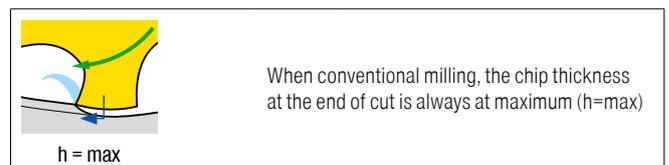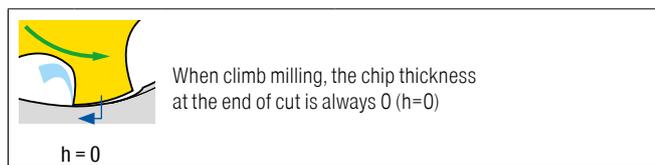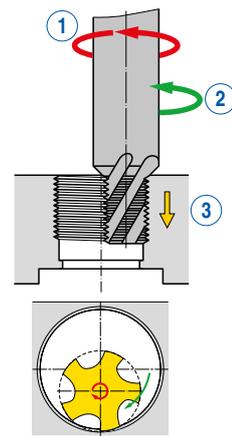


7

Feed rate calculation

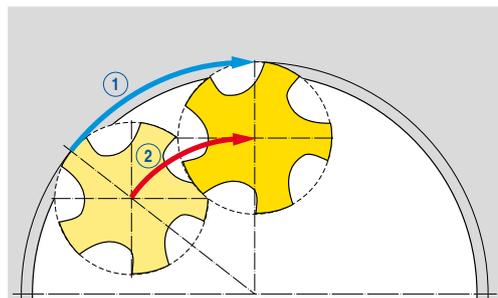


- ① Peripheral feedrate v_f
- ② Centerline feedrate v_{fm}

Peripheral feedrate v_f

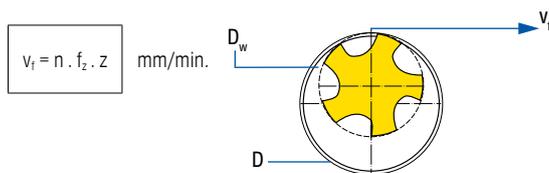

Centerline feedrate v_{fm}

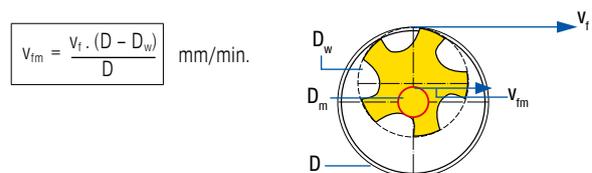

- D_w = Effective diameter in mm
- n = RPM in min^{-1}
- f_z = Feed per tooth in mm

- z = Number of cutting edges (radial)
- D = Nominal thread diameter = external profile diameter in mm
- D_m = Centre path diameter (D- D_w) in mm

Tips for the User

With thread milling there are two different programme possibilities with the feed motion of the tool.

On the one hand the machine controls the feed at the diameter of the tool, on the other hand the feed control is the tool center line. In order to ascertain which method the machine control uses, the following method should be employed:

- ▲ Enter the thread milling routine into the control.
- ▲ Enter a safety margin into the program, so that the tool runs in air.
- ▲ Run the program through and check the operating time.
- ▲ Compare the actual time with the calculated theoretical time.

If the time is longer than the calculated time the feed is controlling the tool center line.
If the time is shorter than the calculated time the feed is controlling the diameter of the tool.

Numeric calculation of cutting data for thread milling

$$n = \frac{v_c \cdot 1000}{d \cdot \pi}$$

$$v_c = \frac{d \cdot \pi \cdot n}{1000}$$

$$v_f = f_z \cdot z \cdot n$$

$$n = \frac{v_f}{f_z \cdot z}$$

$$f_z = \frac{v_f}{z \cdot n}$$

Milling – external contour

$$v_{fm} = \frac{v_f \cdot (D + d)}{D}$$

$$v_f = \frac{D \cdot v_{fm}}{(D + d)}$$

Milling – internal contour

$$v_{fm} = \frac{v_f \cdot (D - d)}{D}$$

$$v_f = \frac{D \cdot v_{fm}}{(D - d)}$$

Helical plunging

$$U_{arc} = 0,25 \cdot v_{fm}$$

Ramping in the arc

$$U_{arc} = v_{fm}$$

- n = rpm rev./min.
- v_c = Cutting speed m/min
- d = Tool diameter mm
- D = Nominal thread-Ø mm
- v_f = Feed rate at the diameter mm/min.

- v_{fm} = Feed rate at the centre mm/min.
- U_{arc} = programmed ramping feed rate mm/min.
- f_z = Feed per tooth mm
- z = Number of cutting edges of the cutter Piece

Correction values for the internal thread milling

The cutting edge diameter of the thread milling cutter which is entered into the machine control, can be calculated as follows:


half the cutter Ø – 0.05 x pitch p

Example: M30x3
Cutter-Ø: 20 mm

$$\frac{\varnothing 20}{2} - (0,05 \cdot 3) = \underline{9,85 \text{ mm}}$$

9,85 mm is the cutting radius to be entered into the machine control

Internal thread production

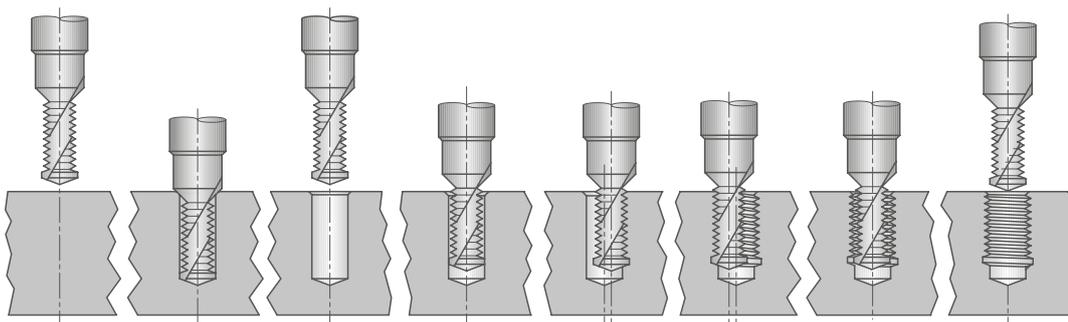

Thread types

M	Metric ISO standard thread	BSW	Whitworth thread
MF	Metric ISO fine thread	BSF	Whitworth fine thread
G	Whitworth thread	NPT	American taper pipe thread
UN	Unified thread	Pg	Steel conduit thread
UNC	Unified Standard Thread	Tr	Trapezoidal thread
UNF	Unified fine thread		

Coatings

TiN	<ul style="list-style-type: none"> ▲ TiN coating ▲ Maximum application temperature: 450 °C 	CWX500	<ul style="list-style-type: none"> ▲ Carbide, TiAlN-coated ▲ The universal carbide grade for almost all materials
TiAlN	<ul style="list-style-type: none"> ▲ TiAlN multilayer coating ▲ Maximum application temperature: 900 °C 	TiCN	<ul style="list-style-type: none"> ▲ TiCN multilayer coating ▲ Maximum application temperature: 450 °C
Ti500	<ul style="list-style-type: none"> ▲ TiAlN-coating ▲ Maximum application temperature: 500 °C 	Ti600	<ul style="list-style-type: none"> ▲ TiAlN multilayer coating ▲ Maximum application temperature: 650 °C
Ti601	<ul style="list-style-type: none"> ▲ High-performance TiAlN multilayer coating ▲ Maximum application temperature: 900 °C 	Ti602	<ul style="list-style-type: none"> ▲ TiCN multilayer coating ▲ Maximum application temperature: 400 °C
AlCrN	<ul style="list-style-type: none"> ▲ High-performance AlCrN multilayer coating ▲ max.application temperature: > 1100 °C 		