


New products for machining technicians

NEW HSS-E thread former with carbide strips



M


→ Page 52



MF

→ Page 73

- ▲ Maximised service life thanks to the innovative combination of the flexible HSS base support material and the wear-resistant, soldered-in carbide forming lobes
- ▲ Universal application in all ductile materials
- ▲ Reduction in tool costs

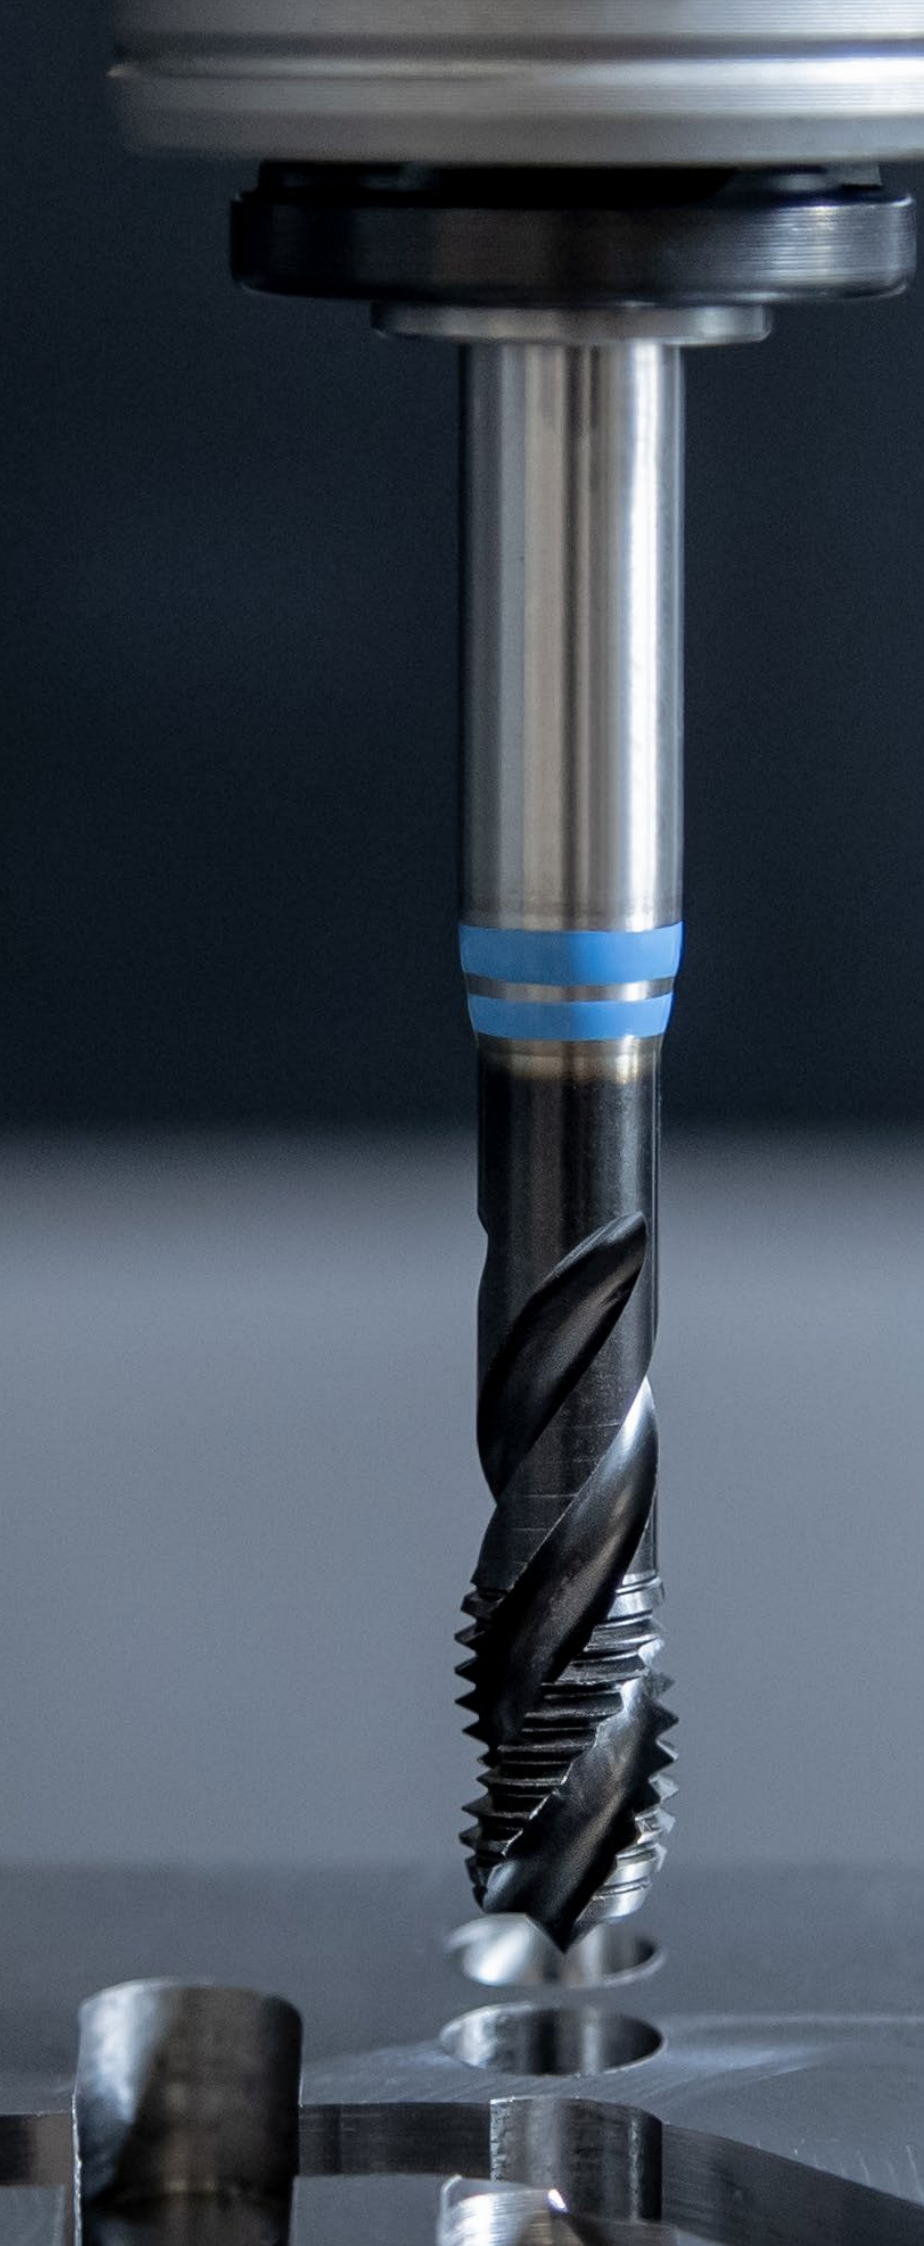

Solid drilling and bore machining

- 1 HSS drilling
- 2 Solid carbide drilling
- 3 Indexable insert drilling
- 4 Reaming and Countersinking
- 5 Spindle Tooling

Threading

- 6 Taps and thread formers
- 7 Circular and Thread Milling
- 8 Thread turning

Turning

- 9 Turning Tools
- 10 Multifunctional Tools – EcoCut and FreeTurn
- 11 Grooving Tools
- 12 Miniature turning tools

Milling

- 13 HSS Milling Cutters
- 14 Solid Carbide milling cutters
- 15 Milling tools with indexable inserts

Clamping technology

- 16 Adaptors and Accessories
- 17 Workpiece clamping

- 18 Material examples

Table of contents

Symbol explanation	4
Tool types/coloured rings	5
Thread types/chamfer forms/cutting materials	6
Application areas/special features	7
Toolfinder	8+9
Taps Overview	10–15
Product programme	16–101
Technical Information	
Thread core hole diameter for tapered threads	102
Tapped hole pilot diameter	103
Thread former pilot hole diameter	104
Thread tolerances and recommended manufacturing tolerances	105
Thread formers – further information	106
Troubleshooting	107
Coatings	108

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.


WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

M	Thread type Explanation of the thread types can be found on → Page 6 .
UNI NCW	Application range Special feature An explanation of the areas of application/special features can be found on → Page 7 .
C 2-3	Chamfer form An explanation of the chamfer forms can be found on → Page 6 .
ISO 2 6H	Tolerance Explanation of the tolerances can be found on → Page 105 .
TiN	Coating An explanation of the coatings can be found on → Page 108 .
	Cooling agent supply



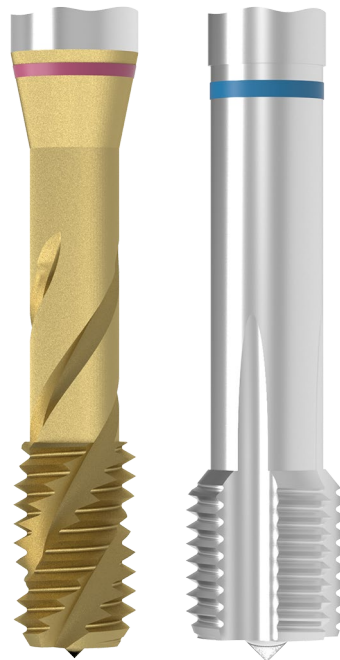


Coloured ring An explanation of the coloured rings can be found on → Page 5 .	
HSS-E	Tool Material An explanation of the cutting materials can be found on → Page 6 .
FHA 42°	Helix angle
$\leq 1100 \text{ N/mm}^2$	Tensile strength
	Through hole thread
	Blind hole thread
	Through hole thread and blind hole thread



The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type! The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Tool types

 	Through hole tap type TruTap ▲ For through holes up to 4xD ▲ Lead Form B: 3.5–5 cutting leads, with spiral point ▲ Straight Flutes ▲ Also suitable for synchronised machining, with Weldon flat and with extra long version ▲ Due to the special geometry of the flutes, the chips are removed in the direction of cut	 	Through hole tap type TruTap DL ▲ For through holes up to 4xD ▲ Lead Form C: 3.5–5 cutting leads, without spiral point ▲ 15° left hand helix ▲ Suitable for steel, titanium alloys and Inconel 718 ▲ The chips are discharged in the direction of cut
 	Blind hole tap type CavTap ▲ For blind holes up to 3xD ▲ Lead Form C: 2–3 cutting leads, without spiral point ▲ Lead Form E: 1.5–2 cutting leads, without spiral point ▲ (35°, 42°, 45°, 50°) right hand helix ▲ Also suitable for synchronised machining, with Weldon flat, with extra long version and through coolant ▲ The high helix angle ensures chips are discharged effectively against the direction of cut	 	Blind hole tap type CavTap SL ▲ For blind holes up to 2xD ▲ Lead Form C: 2–3 cutting leads, without spiral point ▲ Lead Form E: 1.5–2 cutting leads, without spiral point ▲ (15°, 25°, 30°) slow right hand helix ▲ For steel, titanium alloys and Inconel 718 ▲ Also suitable for synchronised machining, with extra long version and through coolant ▲ Also suitable for difficult operating conditions such as cross holes
 	Through and blind hole tap Type DuoTap ▲ For blind and through holes up to 2xD ▲ Lead Form C: 2–3 cutting leads, without spiral point ▲ Lead Form D: 3.5–5 cutting leads, without spiral point ▲ Lead Form E: 1.5–2 cutting leads, without spiral point ▲ Straight Flutes ▲ For steel, short chipping and hardened materials to 55 (62) HRC ▲ Also with extra long version and through coolant	 	Thread former type DuoForm ▲ For blind and through holes up to 3xD ▲ Lead Form C: 2–3 cutting leads, without spiral point ▲ For cold formable materials up to 1400 N/mm² ▲ Suitable for synchronised machining, with lubrication grooves and internal cooling

Coloured rings

 ST for steel up to 750 N/mm ² ST application area: uncoated taps for steels up to a tensile strength of 750 N/mm ²	 VA for corrosion and acid-resistant steels VA application area: for stainless steels	 HT for hardened steels HT application area: for hard machining
 ST for steel to 1100 N/mm ² ST and VG application area: coated taps for steels up to a tensile strength of 1100 N/mm ²	 Ti for heat resistant alloys Ti and Ni application area: for heat-resistant steels, titanium and Inconel	 NW for aluminium and non-ferrous metal NW, Soft, Ms and AMPCO application area: for aluminium, short-chipping brass and soft materials
 HR for steel up to 1400 N/mm ² HR application area: for steels up to a tensile strength of 1400 N/mm ²	 GG for cast iron materials GG application area: for cast iron materials	 UNI for universal application up to 1100 N/mm ² UNI application area: for universal application



A detailed explanation of the areas of application can be found on → **Page 7.**

Thread types

M	ISO metric coarse thread DIN 13
MF	ISO Metric fine thread DIN 13
G	Whitworth pipe thread DIN EN ISO 228
UNC	Unified coarse thread ASME B1.15 and ISO 3161
UNF	Unified fine thread ASME B1.1
EG M	ISO Metric coarse thread for wire inserts DIN 8140-2
EG UNC	EG Unified coarse thread for wire inserts ASME B18.29.1
EG UNF	EG Unified fine thread for wire inserts ASME B18.29.1

UNJC	Unified coarse thread ASME B1.15 and ISO 3161
UNJF	Unified extra fine thread ASME B1.15 and ISO 3161
BSW	Whitworth thread BS84
NPT	American taper pipe thread with sealing (1:16) ANSI/ASME B1.20.1
NPTF	American taper pipe thread with sealing (1:16) ANSI/ASME B1.20.3
Rc	Whitworth taper pipe thread (1:16) DIN EN 10226-2 (ISO7-1)
Rp	Cylindrical Whitworth coarse thread DIN EN 10226-1 (ISO7-1)



These thread types, as well as hand taps and dies, are available in the online shop.

Chamfer forms

B 4-5	Form B (with spiral point, 4-5 thread lead)
C 2-3	Form C (without spiral point, 2-3 thread lead)
D 4-5	Form D (without spiral point, 4-5 thread lead)
E 1,5-2	Form E (without spiral point, 1,5-2 thread lead)

Cutting materials

HSS	High-speed steel
HSS-E	High-performance high speed steel
HSS-E / HM	HSS-E base support material cutting/forming medium: HM
HSS-PM	High-performance sintered high-speed steel
Solid carbide	Solid carbide

CERATIZIT
CORE HOLE DIAMETERS

THREAD CUTTING
METRIC ISO THREADS
AMERICAN THREADS
BRITISH THREADS

THREAD FORMING TAPS
METRIC ISO THREADS
AMERICAN THREADS
BRITISH THREADS

TAPS FOR WIRE INSERTS (HELICOL)
METRIC WIRE INSERT TAPS
AMERICAN WIRE INSERT TAPS

LEGEND

TECHNICAL DATA

CONTACT INFORMATION

TECHNICAL SUPPORT

TECHNICAL TOOLS

TECHNICAL TOOLS

A must-have for your production processes!

Thread core hole diameters at a glance thanks to the CERATIZIT workshop poster!

To receive a copy in your national language, please contact your sales representative.

Application areas

WNT \ Performance	
UNI	for universal application up to 1100 N/mm ²
ST	for good quality free machining steel
FE	Dies for steel
VG	for tempered and heat-resistant steels < 1100 N/mm ²
HR	for high-tensile steels < 1400 N/mm ²
VA	for stainless and acid-resistant steels up to 1100 N/mm ²
GG	for cast iron
NW	For aluminium
Soft	For soft materials
Ms	for short chipping brass
AMPCO	For Ampco alloys
Ti	For titanium and titanium alloys
Ni	special for Inconel 718
HT	for hardened steel and chilled iron up to 55 HRc

EC	DuoForm thread former for universal use
NEO	DuoForm thread former for heat-resistant alloys
ERGO	Hand Taps for stainless, heat-resistant and heat-treated steels up to 1100 N/mm ² 
ERGO F.T	Hand tap for steel up to 1400 N/mm ² , wolfram, chilled iron 



Tools for these application areas are available in the online shop.

WNT \ Standard	
UNI	for universal application up to 1000 N/mm ²
FE	for steel to 850 N/mm ²
FE-HF	for high-tensile steel to 1100 N/mm ²
VA	for corrosion and acid-resistant steels
GG	for cast iron
AL	for aluminium and aluminium alloys

6

Special Features

AUT	short version for automatic use	MMB	Machine taps
AZ	with intermittent teeth, reduces friction	NC	for synchronised CNC machining with minimum length compensation chuck
CNC	for synchronised CNC machining with minimum length compensation chuck	NCW	with Weldon flat for synchronised CNC machining without length compensation chuck
DRY	for dry machining or minimum quantity lubrication (MMS)	R_z=1	Lapped Dies
EL	extra long, with double overall length	S	with back taper, for deep threads
ES	extra short	SN	Thread formers with lubrication grooves
HML	with soldered-in carbide strips for a higher cutting speed	TS	for high-speed machining, up to 100 m/min.
LH	for left hand threads		

Toolfinder

		Machining	Application range	WNT \ Standard				
				M	MF	G	UNC	UNF
Thread formers								
UNI	for cold-formable materials		UNI	55	74			
HSS taps								
UNI	for universal use up to 1000 N/mm ² WNT Standard up to 1100 N/mm ² WNT Performance		UNI	26+27	60+61	76	83	91
			UNI	43+44	67	79	85	94
P	for steels up to 850 N/mm ² WNT Standard up to 1100 N/mm ² WNT Performance		FE	27	61			
			FE	44	68			23 282... 23 283... 
								
P	for high-strength steels up to 1100 N/mm ² WNT Standard up to 1400 N/mm ² WNT Performance		FE-HF	27			83	
			FE-HF	44			85	
								
M	for corrosion and acid-resistant steels		VA	28	61		83	
			VA	44+45	69		85	94
K	for cast iron materials		GG	51				
N	for aluminium and non-ferrous metal		AL	28				
			AL	45				
								
S	for heat-resistant materials							
								
H	Hard materials							

For tools for other applications, refer to the taps overview on → **Pages 10–15.**This article can be found in our online shop at cuttingtools.ceratizit.com

WNT \ Performance																
Tool type	Application range	M	EG M	MF	G	UNC	EG UNC	UNJC	UNF	EG UNF	UNJF	BSW	NPT	NPTF	Rp	Rc
DuoForm	EC	52+53		73	81	86			95							
TruTap	UNI	16–18	56	58+59	75	82	87		90	96		22 626... 22 627... ↓				
CavTap	UNI	29–32	57	62+63	77+78	84	88		92	97		22 628... 22 629... ↓				
TruTap	ST	19+20		59	75											
CavTap	ST	34+35		64+65	78											
DuoTap	ST	46+47		71+72	80								100	22 367... 22 382... ↓	22 381... ↓	22 389... ↓
TruTap	HR	20														
CavTap	HR	35														
DuoTap	HR	46+47		70+71	80											
TruTap	VA	21			75	82										
CavTap	VA	36		66	78	84			92				98			
DuoTap	GG	48		71												
TruTap	NW	21		59	75											
CavTap	NW	37		66	78											
DuoTap	AMPCO	46+47														
TruTap	Ti	22				82					22 167... ↓					
CavTap SL	Ti	38				22 262... ↓		89	93		22 168... ↓					
DuoTap	HT	49		70												

 Shank extensions for taps can be found on → **Page 101.**

 Thread-cutting oils can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
M	Metric ISO standard thread							
	UNI – Through hole thread							
UNI	TruTap	B 4-5	ISO 2 6H ISO 3 6G 7G	HSS-E	■		16+17	
UNI CNC	TruTap	B 4-5	ISO 2X 6HX ISO 3X 6GX 7GX	HSS-E	■		18	
UNI NCW	TruTap	B 4-5	ISO 2 6H	HSS-PM	■		18	
UNI EL	TruTap	B 4-5	ISO 2 6H	HSS-E	■		24	
UNI		B 4-5	ISO 2 6H	HSS-E HSS-PM	■		26	
UNI NC		B 4-5	ISO 2 6H	HSS-E	■		27	
UNI NCW		B 4-5	ISO 2 6H	HSS-PM	■		27	
	UNI – Blind hole thread							
UNI	CavTap	C 2-3	ISO 2 6H 7G	HSS-E	■		29	
UNI	CavTap	E 1,5-2	ISO 2 6H	HSS-E	■	💧	30	
UNI		C 2-3	ISO 2 6H	HSS-E HSS-PM	■		43	
UNI NC		C 2-3	ISO 2 6H	HSS-E	■		43	
UNI NCW	CavTap	C 2-3	ISO 2 6H	HSS-PM	■		30	
UNI NCW		C 2-3	ISO 2 6H	HSS-PM	■		44	
UNI CNC	CavTap	C 2-3	ISO 2X 6HX ISO 2 6H 7G	HSS-E	■		31	
UNI CNC	CavTap	E 1,5-2	ISO 2 6H	HSS-E	■	💧	31	
UNI CNC	CavTap	C 2-3	ISO 3 6G	HSS-E	■		22 588..., 22 589...	
UNI DRY	CavTap	C 2-3	ISO 2 6H	HSS-E	■	💧	32	
UNI	CavTap	C 2-3	ISO 1 4H	HSS-E	■		22 528...	
UNI	CavTap	E 1,5-2	ISO 3 6G	HSS-E	■		22 530...	
UNI S	CavTap	C 2-3	ISO 2 6H	HSS-E	■		22 536..., 22 537...	
UNI ES	CavTap	E 1,5-2	ISO 2 6H	HSS-E	■		39	
UNI EL	CavTap	C 2-3	ISO 2 6H	HSS-E	■		41	
UNI	CavTap SL	C 2-3	ISO 2 6H	HSS-E	□		22 516...	

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
M	Metric ISO standard thread							
	P – Through hole thread							
ST	TruTap	B 4-5	ISO 2 6H	HSS-E	□		19	
ST LH	TruTap	B 4-5	ISO 2 6H	HSS-E	□		19	
ST	TruTap	B 4-5	ISO 1 4H	HSS-E	□		22 002..., 22 003...	
ST	TruTap	B 4-5	ISO 3 6G	HSS-E	□		22 004...	
ST TS	TruTap	B 4-5	ISO 2X 6HX	HSS-E	■		20	
HR	TruTap	B 4-5	ISO 2X 6HX	HSS-PM	■		20	
VG	TruTap	B 4-5	ISO 2X 6HX	HSS-E	■		20	
ST EL	TruTap	B 4-5	ISO 2 6H	HSS-E	□		24	
ST MMB		≈ 20	ISO 2 6H	HSS-E	□		25	
FE		B 4-5	ISO 2 6H	HSS-E	□		27	
FE-HF		B 4-5	ISO 2 6H	HSS-E	■		27	
	P – Blind hole thread							
ST	CavTap	C 2-3	ISO 2 6H	HSS-E	■□		34	
ST	CavTap	C 2-3	ISO 3 6G	HSS-E	□		22 134..., 22 135...	
ST CNC	CavTap SL	C 2-3	ISO 2X 6HX	HSS-E	■	💧	33	
ST TS	CavTap SL	C 2-3	ISO 2X 6HX	HSS-E	■		33	
ST ES	CavTap SL	C 2-3	ISO 2 6H	HSS-E	□		40	
ST EL	CavTap	C 2-3	ISO 2 6H	HSS-E	□		41	
ST EL	CavTap SL	E 1,5-2	ISO 2 6H	HSS-E	□		42	
ST LH	CavTap	C 2-3	ISO 2 6H	HSS-E	□		34	
ST TS	CavTap	C 2-3	ISO 2 6H	HSS-E	■	💧	35	
HR	CavTap SL	C 2-3	ISO 2 6H	HSS-PM	■		33	
HR	CavTap	C 2-3	ISO 2 6H	HSS-PM	■□		35	



This article can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
M	Metric ISO standard thread							
FE			ISO 2 6H	HSS-E	□			44
FE-HF			ISO 2 6H	HSS-E	■			44
	P – Blind hole thread							
ST	DuoTap		ISO 2X 6HX	HSS-E	□			46+47
ST AZ	DuoTap		ISO 2X 6HX	HSS-E	□			22 111..., 22 113...
HR	DuoTap		ISO 2X 6HX	HSS-E	■			46+47
HR EL	DuoTap		ISO 2X 6HX	HSS-E	■			50
	M – Through hole thread							
VA	TruTap		ISO 2 6H	HSS-E	■			21
VA			ISO 2 6H	HSS-PM HSS-E	■			28
	M – Blind hole thread							
VA	CavTap		ISO 2 6H	HSS-E	■			36
VA	CavTap		ISO 2 6H	HSS-E	■	💧		36
VA			ISO 2 6H	HSS-E HSS-PM	■ □			44+45
	K – Through hole thread and blind hole thread							
GG	DuoTap		ISO 2X 6HX	HSS-E	■	💧		48
GG			ISO 2X 6HX	HSS-E	■			51
	N – Through hole thread							
NW	TruTap		ISO 2 6H	HSS-E	■			21
Soft	TruTap		ISO 2 6H	HSS-E	■			22 305...
AL			ISO 2 6H	HSS-E	■ □			28
	N – Blind hole thread							
Soft	CavTap		ISO 2 6H	HSS-E	■ □			37
NW	CavTap		ISO 2 6H	HSS-E	■			37
AL			ISO 2 6H	HSS-E	■ □			45

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
M	Metric ISO standard thread							
	N – Through hole thread and blind hole thread							
AMPCO	DuoTap		ISO 2X 6HX	HSS-PM	□			46+47
Ms	DuoTap		ISO 2X 6HX	HSS-E	□			22 119...
	S – Through hole thread							
Ti	TruTap		ISO 1X 4HX ISO 2X 6HX	HSS-PM	■			22
Ti	TruTap DL		ISO 2X 6HX	HSS-E	■			23
Ni	TruTap DL		ISO 2X 6HX	HSS-E	■			23
	S – Blind hole thread							
Ti	CavTap SL		ISO 2X 6HX	HSS-PM	■			38
Ni	CavTap SL		ISO 2X 6HX	HSS-PM	■			38
	H – Through hole thread and blind hole thread							
HT	DuoTap		ISO 2X 6HX	VHM	■			49
HT	DuoTap		ISO 2X 6HX	HSS-PM	■			49
	Machine thread formers							
EC	DuoForm		ISO 2X 6HX	HSS-E	■			52
EC SN	DuoForm		ISO 2X 6HX ISO 3X 6GX	HSS-E	■			53
NW HML	DuoForm		ISO 2X 6HX	HSS-E	□	💧		52
NEO SN	DuoForm		ISO 2X 6HX	HSS-PM	■	💧		54
UNI			ISO 2X 6HX	HSS-E	■			55
UNI SN			ISO 2X 6HX	HSS-E	■			55
	Hand taps							
ST			ISO 2X 6HX	VHM	□			22 800...
ST			ISO 2X 6HX	HSS-E	□			22 010...
ERGO			ISO 2X 6HX	HSS-E	□			22 012...
ERGO F.T.			ISO 2X 6HX	HSS-E	■			22 013...

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT / Performance	WNT / Standard
M	Metric ISO standard thread							
	Dies							
FE			ISO 6g ISO 6e	HSS	☐		22 700..., 22 701...	
FE			ISO 6g	HSS	☐		23 910...	
FE LH			ISO 6g	HSS	☐		22 702...	
VA			ISO 6g	HSS-E	☐		22 704...	
VA R _z =1			ISO 6g	HSS-E	☐		22 705...	

EG M	ISO metric coarse thread for wire inserts							
	UNI – Through hole thread							
UNI	TruTap		6H mod	HSS-E	☒		56	
	UNI – Blind hole thread							
UNI	CavTap		6H mod	HSS-E	☒		57	
	N – Blind hole thread							
Soft	CavTap		6H mod	HSS-E	☒		57	

MF	Metric ISO fine thread							
	UNI – Through hole thread							
UNI	TruTap		ISO 2 6H	HSS-E	☒		58+59	
UNI	TruTap		ISO 3 6G	HSS-E	☒		22 599...	
UNI			ISO 2 6H	HSS-PM HSS-E	☒		60+61	
	UNI – Blind hole thread							
UNI	CavTap		ISO 2 6H ISO 3 6G	HSS-E	☒		62	
UNI	CavTap		ISO 2 6H	HSS-E	☒		63	
UNI			ISO 2 6H	HSS-PM HSS-E	☒		67+68	

MF	Metric ISO fine thread							
UNI CNC	CavTap		ISO 3 6G	HSS-E	☒		22 561...	
UNI CNC	CavTap		ISO 2 6H 7G	HSS-E	☒		63	
UNI NC			ISO 2 6H	HSS-E	☒		68	
	P – Through hole thread							
ST TS	TruTap		ISO 2X 6HX	HSS-E	☒		59	
ST LH	TruTap		ISO 2 6H	HSS-E	☐		59	
FE			ISO 2 6H	HSS-E	☐		61	
	P – Blind hole thread							
ST TS	CavTap		ISO 2 6H	HSS-E	☒		22 216...	
ST LH	CavTap		ISO 2 6H	HSS-E	☐		64	
ST	CavTap SL		ISO 2 6H	HSS-E	☐		65	
FE			ISO 2 6H	HSS-E	☐		68	
	P – Through hole thread and blind hole thread							
ST	DuoTap		ISO 2X 6HX	HSS-E	☐		70+71	
ST ES	DuoTap		ISO 2X 6HX	HSS-E	☐		72	
ST LH/ES	DuoTap		ISO 2X 6HX	HSS-E	☐		72	
HR	DuoTap		ISO 2X 6HX	HSS-E	☒		70+71	
	M – Through hole thread							
VA			ISO 2 6H	HSS-E	☒		61	
	M – Blind hole thread							
VA	CavTap		ISO 2 6H	HSS-E	☒		66	
VA			ISO 2 6H	HSS-E	☒		69	
	K – Through hole thread and blind hole thread							
GG	DuoTap		ISO 2X 6HX	HSS-E	☒		71	

 This article can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
MF	Metric ISO fine thread							
	N – Through hole thread							
NW	TruTap		ISO 2 6H	HSS-E	■		59	
	N – Blind hole thread							
NW	CavTap		ISO 2 6H	HSS-E	■		66	
	H – Through hole thread and blind hole thread							
HT	DuoTap		ISO 2X 6HX	VHM	■		70	
	Machine thread formers							
EC SN	DuoForm		ISO 2X 6HX	HSS-E	■		73	
EC HML	DuoForm		ISO 2X 6HX	HSS-E	■	💧	73	
UNI SN			ISO 2X 6HX	HSS-E	■		74	
	Dies							
FE			ISO 6g	HSS	□		22 711...	
VA			ISO 6g	HSS-E	□		22 714...	

G	Whitworth pipe thread							
	UNI – Through hole thread							
UNI	TruTap		ISO 228	HSS-E	■		75	
UNI			ISO 228	HSS-E	■		76	
	UNI – Blind hole thread							
UNI	CavTap		ISO 228	HSS-E	■		77	
UNI	CavTap		ISO 228, ISO 228 +0,05	HSS-E	■		77	
UNI CNC	CavTap		ISO 228	HSS-E	■		78	
UNI			ISO 228	HSS-E	■		79	

G	Whitworth pipe thread							
	P – Through hole thread							
ST	TruTap		ISO 228	HSS-E	□		75	
FE			ISO 228	HSS-E	□		23 260...	
	P – Blind hole thread							
ST	CavTap		ISO 228	HSS-E	□		78	
ST	CavTap SL		ISO 228	HSS-E	□		22 353...	
FE			ISO 228	HSS-E	□		23 261...	
	P – Through hole thread and blind hole thread							
ST	DuoTap		ISO 228X	HSS-E	□		80	
HR	DuoTap		ISO 228X	HSS-E	■		80	
	M – Through hole thread							
VA	TruTap		ISO 228	HSS-E	■		75	
	M – Blind hole thread							
VA	CavTap		ISO 228	HSS-E	■		78	
	K – Through hole thread and blind hole thread							
GG	DuoTap		ISO 228X	HSS-E	■		22 348...	
	N – Through hole thread							
NW	TruTap		ISO 228	HSS-E	■		75	
	N – Blind hole thread							
NW	CavTap		ISO 228	HSS-E	■		78	
	Machine thread formers							
EC	DuoForm		ISO 228	HSS-E	■		81	
EC SN	DuoForm		ISO 228	HSS-E	■		81	
	Dies							
FE			ISO 228A	HSS	□		22 741...	

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
UNC	Unified coarse thread							
	UNI – Through hole thread							
UNI	TruTap		2B	HSS-E	■		82	
UNI			2B	HSS-E	■		83	
	UNI – Blind hole thread							
UNI	CavTap		2B	HSS-E	■		84	
UNI			2B	HSS-E	■		85	
	P – Through hole thread							
FE-HF			2B	HSS-E	■		83	
	P – Blind hole thread							
ST	CavTap		2B	HSS-E	□		22 264...	
FE-HF			2B	HSS-E	■		85	
	M – Through hole thread							
VA	TruTap		2B	HSS-E	■		82	
VA			2B	HSS-E	■		83	
	M – Blind hole thread							
VA	CavTap		2B	HSS-E	■		84	
VA			2B	HSS-E	□		85	
	S – Through hole thread							
Ti	TruTap		2BX	HSS-PM	■		82	
	S – Blind hole thread							
TI	CavTap SL		2BX	HSS-PM	■		22 262...	
	Machine thread formers							
EC	DuoForm		2BX	HSS-E	■		86	
EC SN	DuoForm		2BX	HSS-E	■		86	

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
UNC	Unified coarse thread							
	Dies							
FE			2A	HSS	□		22 721...	

EG UNC	Unified coarse thread for wire inserts							
	UNI – Through hole thread							
UNI	TruTap		2B mod	HSS-E	■		87	
	UNI – Blind hole thread							
UNI	CavTap		2B mod	HSS-E	■		88	

UNJC	Unified coarse thread							
	S – Blind hole thread							
Ti	CavTap SL		3BX	HSS-E	■		89	

UNF	Unified fine thread							
	UNI – Through hole thread							
UNI	TruTap		2B	HSS-E	■		90	
UNI			2B	HSS-E	■		91	
	UNI – Blind hole thread							
UNI	CavTap		2B	HSS-E	■		92	
UNI	CavTap		2B +0,05	HSS-E	■		92	
UNI			2B	HSS-E	■		94	
	M – Blind hole thread							
VA	CavTap		2B	HSS-E	■		92	
VA			2B	HSS-E	□		94	

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated uncoated	Coolant	WNT \ Performance	WNT \ Standard
UNF	Unified fine thread							
	S – Blind hole thread							
Ti	CavTap SL		2BX 3BX	HSS-PM	■		93	
	Thread formers							
EC SN	DuoForm		2BX	HSS-E	■		95	

EG UNF	Unified Fine Thread for wire inserts							
	UNI – Through hole thread							
UNI	TruTap		2B	HSS-E	■		96	
	UNI – Blind hole thread							
UNI	CavTap		2B	HSS-E	■		97	

UNJF	Unified extra-fine thread							
	S – Through hole thread							
Ti	TruTap DL		3BX	HSS-E	■		22 167... 	
	S – Blind hole thread							
Ti	CavTap SL		3BX	HSS-E	■		22 168... 	

BSW	Whitworth thread							
	UNI – Through hole thread							
UNI	TruTap		med.	HSS-E	■		22 626..., 22 627... 	
	UNI – Blind hole thread							
UNI	CavTap		med.	HSS-E	■		22 628..., 22 629... 	

NPT	American taper pipe thread							
	P – Through hole thread and blind hole thread							
ST ES	DuoTap			HSS-E	□		100	
VG	DuoTap			HSS-E	□		99	
VG AZ	DuoTap			HSS-E	□		22 377..., 22 378... 	
	M – Blind hole thread							
VA	CavTap			HSS-E	■		98	

NPTF	American taper pipe thread							
	P – Through hole thread and blind hole thread							
ST	DuoTap			HSS-E	□		22 382... 	
VG	DuoTap			HSS-E	□		22 380... 	
ST ES	DuoTap			HSS-E	□		22 367... 	

Rp	Cylindrical Whitworth thread							
	P – Through hole thread and blind hole thread							
ST	DuoTap		X	HSS-E	□		22 381... 	

Rc	Tapered Whitworth thread							
	P – Through hole thread and blind hole thread							
ST	DuoTap			HSS-E	□		22 389... 	


Accessories

Shank extensions for taps 101

Tapping Oil, Chlorine Free 22 950...


Thread-cutting paste, chlorine-free

Through hole – Machine taps, right hand

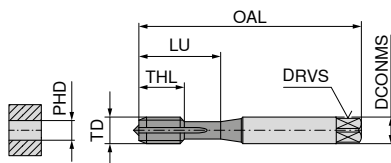

DIN 371 with reinforced shank

UNI	UNI	UNI	UNI	UNI
B 4-5	B 4-5	B 4-5	B 4-5	B 4-5
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 3 6G	7G
nitr. + vap.	TiN	TiCN	nitr. + vap.	nitr. + vap.
HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 501 ...	22 503 ...	22 505 ...	22 508 ...	22 510 ...
M1	0,25	40	2,5	2,1	0,75	5	5	2	010 ¹⁾				
M1,2	0,25	40	2,5	2,1	0,95	5	5	2	012 ¹⁾				
M1,4	0,30	40	2,5	2,1	1,10	7	7	3	014 ¹⁾				
M1,6	0,35	40	2,5	2,1	1,25	8	11	3	016				
M1,7	0,35	40	2,5	2,1	1,35	6	11	2	017				
M1,8	0,35	40	2,5	2,1	1,45	6	11	2	018				
M2	0,40	45	2,8	2,1	1,60	7	12	2		020			020
M2	0,40	45	2,8	2,1	1,60	7	12	3	020				
M2,2	0,45	45	2,8	2,1	1,75	7	12	2	022				
M2,5	0,45	50	2,8	2,1	2,05	9	14	2	025			025	025
M3	0,50	56	3,5	2,7	2,50	11	18	3	030	030	030	030	030
M3,5	0,60	56	4,0	3,0	2,90	12	20	3	035				
M4	0,70	63	4,5	3,4	3,30	13	21	3	040	040	040	040	040
M5	0,80	70	6,0	4,9	4,20	15	25	3	050	050	050	050	050
M6	1,00	80	6,0	4,9	5,00	17	30	3	060	060	060	060	060
M7	1,00	80	7,0	5,5	6,00	17	30	3	070				
M8	1,25	90	8,0	6,2	6,80	20	35	3	080	080	080	080	080
M10	1,50	100	10,0	8,0	8,50	22	39	3	100	100	100	100	100
M12	1,75	110	12,0	9,0	10,20	24	44	3	120				
P									12	15	15	12	12
M									7	9	9	7	7
K									12	18	18	12	12
N										12	12		
S													
H													
O													

1) Tol. ISO 14H ≤ M1.4


Cutting speed v_c (m/min.)

DIN 376 can be found on the next page

Through hole – Machine taps, right hand

TruTap

M



DIN 376 with reduced shank

UNI	UNI	UNI	UNI
B 4-5	B 4-5	B 4-5	B 4-5
ISO 2 6H	ISO 2 6H	ISO 3 6G	7G
nitr. + vap.	TiN	nitr. + vap.	nitr. + vap.

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xDHSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xDHSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xDHSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M3	0,50	56	2,2		2,5	11	3
M4	0,70	63	2,8	2,1	3,3	13	3
M5	0,80	70	3,5	2,7	4,2	15	3
M6	1,00	80	4,5	3,4	5,0	17	3
M8	1,25	90	6,0	4,9	6,8	20	3
M10	1,50	100	7,0	5,5	8,5	22	3
M12	1,75	110	9,0	7,0	10,2	24	3
M14	2,00	110	11,0	9,0	12,0	26	3
M16	2,00	110	12,0	9,0	14,0	27	3
M18	2,50	125	14,0	11,0	15,5	30	3
M20	2,50	140	16,0	12,0	17,5	32	3
M22	2,50	140	18,0	14,5	19,5	32	3
M24	3,00	160	18,0	14,5	21,0	34	3
M27	3,00	160	20,0	16,0	24,0	36	3
M30	3,50	180	22,0	18,0	26,5	40	4
M33	3,50	180	25,0	20,0	29,5	40	4
M36	4,00	200	28,0	22,0	32,0	50	4
M42	4,50	200	32,0	24,0	37,5	56	4
M48	5,00	250	36,0	29,0	43,0	65	4

22 502 ...

22 504 ...

22 509 ...

22 511 ...

030
040
050
060
080
100
120
140
160
180
200
220
240
270
300
330
360
420
480120
140
160
180
200120
160
200120
160


P	12	15	12	12
M	7	9	7	7
K	12	18	12	12
N		12		
S				
H				
O				

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand


▲ CNC = for synchronised CNC machining with minimum length compensation chuck

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck

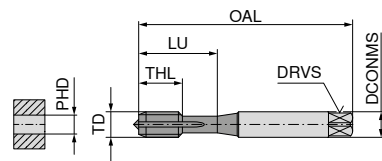

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	6	18	3
M3	0,50	70	6,0	4,9	2,5	6	18	3
M4	0,70	63	4,5	3,4	3,3	7	21	3
M4	0,70	70	6,0	4,9	3,3	7	21	3
M5	0,80	70	6,0	4,9	4,2	8	25	3
M6	1,00	80	6,0	4,9	5,0	10	30	3
M8	1,25	90	8,0	6,2	6,8	14	35	3
M8	1,25	90	8,0	6,2	6,8	14	35	4
M10	1,50	100	10,0	8,0	8,5	16	39	3
M10	1,50	100	10,0	8,0	8,5	16	39	4
M12	1,75	110	10,0	8,0	10,2	18	41	3
M16	2,00	110	12,0	9,0	14,0	22	44	3

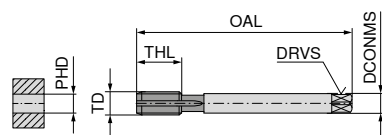

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	18	4
M14	2,00	110	11	9	12,0	20	4
M16	2,00	110	12	9	14,0	22	4
M20	2,50	140	16	12	17,5	25	4

P	15	15	15	15
M	8	9	9	9
K	15	18	18	18
N	22	12	12	12
S				
H				
O				

Cutting speed v_c (m/min.)

UNI NCW	UNI CNC	UNI CNC	UNI CNC
B 4-5	B 4-5	B 4-5	B 4-5
ISO 2 6H	ISO 2X 6HX	ISO 3X 6GX	7GX
TiN	TiN GS	TiN GS	TiN GS
HSS-PM FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
22 148 ...	22 542 ...	22 596 ...	22 592 ...
030	030		
040	040	040	040
050	050	050	050
060	060	060	060
080	080	080	080
100	100	100	100
120			
160			

22 543 ...

22 593 ...


M12	120	120
M14	140	
M16	160	
M20	200	

Through hole – Machine taps

▲ LH = for left hand threads


TruTap

M

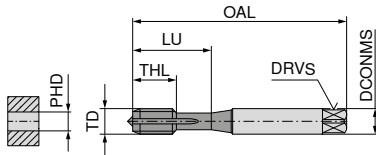

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M2	0,40	45	2,8	2,1	1,60	7	12	2
M2,3	0,40	45	2,8	2,1	1,90	7	12	2
M2,5	0,45	50	2,8	2,1	2,05	9	14	2
M2,6	0,45	50	2,8	2,1	2,15	9	14	2
M3	0,50	56	3,5	2,7	2,50	11	18	3
M3,5	0,60	56	4,0	3,0	2,90	12	20	3
M4	0,70	63	4,5	3,4	3,30	13	21	3
M5	0,80	70	6,0	4,9	4,20	15	25	3
M6	1,00	80	6,0	4,9	5,00	17	30	3
M8	1,25	90	8,0	6,2	6,80	20	35	3
M10	1,50	100	10,0	8,0	8,50	22	39	3

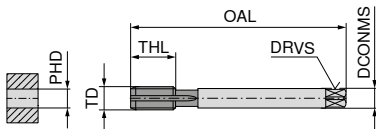

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M5	0,80	70	3,5	2,7	4,2	15	3
M6	1,00	80	4,5	3,4	5,0	17	3
M8	1,25	90	6,0	4,9	6,8	20	3
M10	1,50	100	7,0	5,5	8,5	22	3
M12	1,75	110	9,0	7,0	10,2	24	3
M14	2,00	110	11,0	9,0	12,0	26	3
M16	2,00	110	12,0	9,0	14,0	27	3
M18	2,50	125	14,0	11,0	15,5	30	3
M20	2,50	140	16,0	12,0	17,5	32	3

P	12	12
M		
K	12	12
N	12	22
S		
H		
O		

Cutting speed v_c (m/min.)

ST

ISO 2
6HST
LHISO 2
6HHSS-E
FHA 0°
≤ 750 N/mm²
≤ 4xD

22 020 ...


020
023
025
026
030
035
040
050
060
080
100HSS-E
FHA 0°
≤ 750 N/mm²
≤ 4xD

22 127 ...

030
040
050
060
080
100


Through hole – Machine taps, right hand

▲ TS = for high-speed machining, up to 100 m/min.

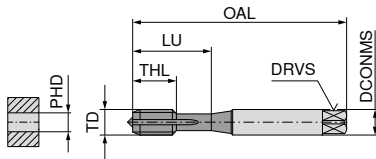

DIN 371 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M2	0,40	45	2,8	2,1	1,60	7	12	2
M2	0,40	45	2,8	2,1	1,60	4	12	2
M2,5	0,45	50	2,8	2,1	2,05	9	14	2
M2,5	0,45	50	2,8	2,1	2,05	5	15	2
M3	0,50	56	3,5	2,7	2,50	11	18	2
M3	0,50	56	3,5	2,7	2,50	6	18	3
M4	0,70	63	4,5	3,4	3,30	13	21	2
M4	0,70	63	4,5	3,4	3,30	7	21	3
M5	0,80	70	6,0	4,9	4,20	15	25	2
M5	0,80	70	6,0	4,9	4,20	8	25	3
M6	1,00	80	6,0	4,9	5,00	17	30	3
M6	1,00	80	6,0	4,9	5,00	10	30	3
M8	1,25	90	8,0	6,2	6,80	20	35	3
M8	1,25	90	8,0	6,2	6,80	14	35	4
M10	1,50	100	10,0	8,0	8,50	22	39	3
M10	1,50	100	10,0	8,0	8,50	16	39	4

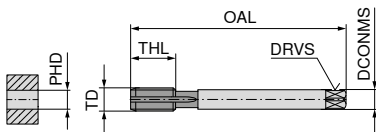

DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M12	1,75	110	9	7	10,2	18	4
M16	2,00	110	12	9	14,0	22	4
M20	2,50	140	16	12	17,5	25	4

P	65	8	10
M		8	8
K	65		
N	75	10	22
S		4	
H			
O			


Cutting speed v_c (m/min.)

ST TS	HR	VG
B 4-5	B 4-5	B 4-5
ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX
TiN	AlTiNHD	TiN
HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-PM FHA 0° ≤ 1400 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
22 092 ...	22 468 ...	22 120 ...
020	02000	020
025	02500	025
030	03000	030
040	04000	040
050	05000	050
060	06000	060
080	08000	080
100	10000	100

Through hole – Machine taps, right hand


TruTap

M

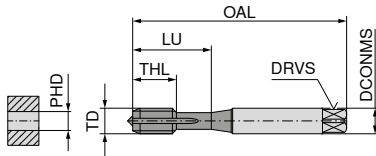

DIN 371 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M1,6	0,35	40	2,5	2,1	1,25	6	11	2
M2	0,40	45	2,8	2,1	1,60	7	12	2
M2,5	0,45	50	2,8	2,1	2,05	9	14	2
M3	0,50	56	3,5	2,7	2,50	11	18	3
M3,5	0,60	56	4,0	3,0	2,90	12	20	3
M4	0,70	63	4,5	3,4	3,30	13	21	3
M5	0,80	70	6,0	4,9	4,20	15	25	3
M6	1,00	80	6,0	4,9	5,00	17	30	3
M8	1,25	90	8,0	6,2	6,80	20	35	3
M8	1,25	100	8,0	6,2	6,80	20	35	3
M10	1,50	100	10,0	8,0	8,50	22	39	3
M10	1,50	110	10,0	8,0	8,50	22	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	24	3
M14	2,00	110	11	9	12,0	26	3
M16	2,00	110	12	9	14,0	27	3
M18	2,50	125	14	11	15,5	30	3
M20	2,50	140	16	12	17,5	32	3

P	8	10	
M	6	8	
K			
N			15
S			
H			
O			

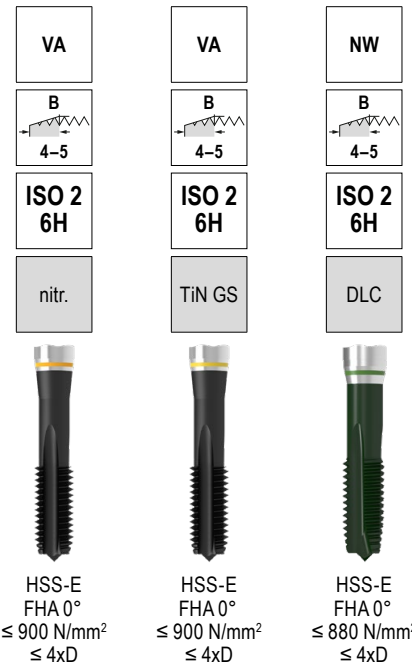Cutting speed v_c (m/min.)

22 056 ...

020
025
030
035
040
050
060
080
100

22 038 ...

016
020
025
030
040
050
060
080
100

22 464 ...

02000
02500
03000
04000
05000
06000
08000
10000

22 057 ...

120
140
160
180
200

22 039 ...

120
140
160
200


22 465 ...

12000
16000
20000

Through hole – Machine taps, right hand


TruTap

M

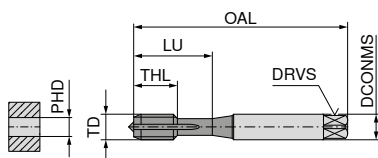

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M1,6	0,35	40	2,5	2,1	1,25	8	9,5	3
M2	0,40	45	2,8	2,1	1,60	8	9,5	3
M2,5	0,45	50	2,8	2,1	2,05	9	14,0	3
M3	0,50	56	3,5	2,7	2,50	11	18,0	3
M3,5	0,60	56	4,0	3,0	2,90	12	20,0	3
M4	0,70	63	4,5	3,4	3,30	13	21,0	3
M5	0,80	70	6,0	4,9	4,20	15	25,0	3
M6	1,00	80	6,0	4,9	5,00	17	30,0	3
M8	1,25	90	8,0	6,2	6,80	20	35,0	3
M10	1,50	100	10,0	8,0	8,50	22	39,0	3

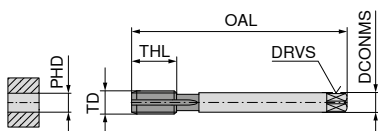

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	24	3

P	7	5	7
M	7	5	7
K			
N			
S	5	3	5
H			
O			


Cutting speed v_c (m/min.)

Ti	Ti	Ti
B 4-5	B 4-5	B 4-5
ISO 1X 4HX	ISO 2X 6HX	ISO 2X 6HX
TiN	vap.	TiN
HSS-PM FHA 0° ≤ 44 HRC ≤ 4xD	HSS-PM FHA 0° ≤ 1400 N/mm² ≤ 4xD	HSS-PM FHA 0° ≤ 44 HRC ≤ 4xD
22 081 ...	22 075 ...	22 077 ...
020	016	
	020	
030	025	
	030	030
040	035	
050	040	040
060	050	050
080	060	060
	080	080
	100	100

Through hole – Machine taps, right hand


TruTap
DL

M

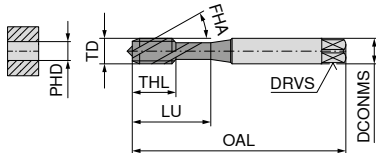

DIN 371 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	11	18	2
M4	0,70	63	4,5	3,4	3,3	13	21	3
M5	0,80	70	6,0	4,9	4,2	15	25	3
M6	1,00	80	6,0	4,9	5,0	17	30	3
M8	1,25	90	8,0	6,2	6,8	20	35	3
M10	1,50	100	10,0	8,0	8,5	22	39	3

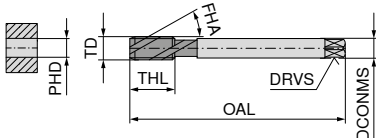

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7,0	10,2	24	3
M16	2,00	110	12	9,0	14,0	27	3
M20	2,50	140	16	12,0	17,5	32	3
M24	3,00	160	18	14,5	21,0	34	3

P	7	
M	7	
K		
N	22	22
S	5	2
H		
O		

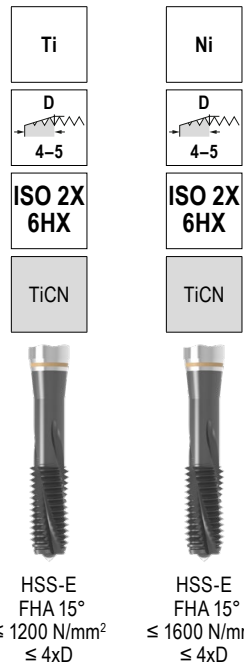Cutting speed v_c (m/min.)

22 159 ...

22 297 ...

030

030

040

040

050

050

060

060

080

080

100

100

22 160 ...

22 298 ...

120

120

160

160

200

200

240


240

Through hole – Machine taps, right hand

▲ EL = extra long, with double overall length


TruTap

M

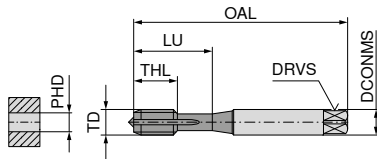

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	100	3,5	2,7	2,5	11	18	3
M4	0,70	125	4,5	3,4	3,3	13	21	3
M5	0,80	140	6,0	4,9	4,2	15	25	3
M6	1,00	160	6,0	4,9	5,0	17	30	3
M8	1,25	180	8,0	6,2	6,8	20	35	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M6	1,00	160	4,5	3,4	5,0	17	3
M8	1,25	180	6,0	4,9	6,8	20	3
M10	1,50	200	7,0	5,5	8,5	22	3
M12	1,75	224	9,0	7,0	10,2	24	3
M14	2,00	224	11,0	9,0	12,0	26	3
M16	2,00	224	12,0	9,0	14,0	27	3
M18	2,50	250	14,0	11,0	15,5	30	3
M20	2,50	280	16,0	12,0	17,5	32	3

P	12	12
M	7	
K	12	12
N		22
S		
H		
O		

Cutting speed v_c (m/min.)UNI
ELISO 2
6Hnitr. +
vap.HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 514 ...

030
040
050
060
080ST
ELISO 2
6HHSS-E
FHA 0°
≤ 950 N/mm²
≤ 4xD


22 233 ...

030
040
050
060
080

Through hole – Machine taps, right hand

▲ MMB = Nut taps

M

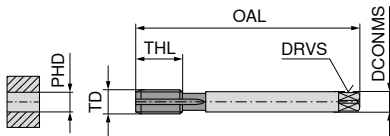ST
MMBISO 2
6H

DIN 357 with reduced shank

HSS-E
FHA 0°
≤ 850 N/mm²
≤ 1xD


22 098 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	
M3	0,50	70	2,2		2,5	16	3	030
M4	0,70	90	2,8	2,1	3,3	22	3	040
M5	0,80	100	3,5	2,7	4,2	24	3	050
M6	1,00	110	4,5	3,4	5,0	30	3	060
M8	1,25	125	6,0	4,9	6,8	38	3	080
M10	1,50	140	7,0	5,5	8,5	45	3	100
M12	1,75	180	9,0	7,0	10,2	50	3	120
M16	2,00	200	12,0	9,0	14,0	63	3	160
P								15
M								
K								
N								
S								
H								
O								

Cutting speed v_c (m/min.)


Through hole – Machine taps, right hand

M

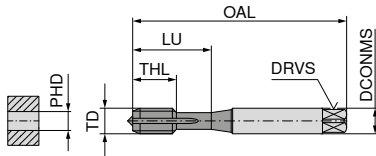

DIN 371 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M2	0,40	45	2,8	2,1	1,60	4	13,5	2
M2	0,40	45	2,8	2,1	1,60	7	12,0	2
M2,5	0,45	50	2,8	2,1	2,05	9	14,0	2
M3	0,50	56	3,5	2,7	2,50	11	18,0	3
M4	0,70	63	4,5	3,4	3,30	13	21,0	3
M5	0,80	70	6,0	4,9	4,20	15	25,0	3
M6	1,00	80	6,0	4,9	5,00	17	30,0	3
M8	1,25	90	8,0	6,2	6,80	20	35,0	3
M10	1,50	100	10,0	8,0	8,50	22	39,0	3



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M3	0,50	56	2,2		2,5	11	3
M4	0,70	63	2,8	2,1	3,3	13	3
M5	0,80	70	3,5	2,7	4,2	15	3
M6	1,00	80	4,5	3,4	5,0	17	3
M8	1,25	90	6,0	4,9	6,8	20	3
M10	1,50	100	7,0	5,5	8,5	22	3
M12	1,75	110	9,0	7,0	10,2	24	3
M14	2,00	110	11,0	9,0	12,0	20	4
M14	2,00	110	11,0	9,0	12,0	26	3
M16	2,00	110	12,0	9,0	14,0	27	3
M18	2,50	125	14,0	11,0	15,5	25	4
M18	2,50	125	14,0	11,0	15,5	30	3
M20	2,50	140	16,0	12,0	17,5	32	3
M22	2,50	140	18,0	14,5	19,5	32	3
M24	3,00	160	18,0	14,5	21,0	34	3
M27	3,00	160	20,0	16,0	24,0	36	3
M30	3,50	180	22,0	18,0	26,5	40	4
M33	3,50	180	25,0	20,0	29,5	40	4
M36	4,00	200	28,0	22,0	32,0	50	4

P	12	15	15
M	7	9	9
K	12	18	18
N		12	12
S			
H			
O			

Cutting speed v_c (m/min.)

UNI	UNI	UNI
B 4-5	B 4-5	B 4-5
ISO 2 6H	ISO 2 6H	ISO 2 6H
nitr. + vap.	TiN	TiN
HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-PM FHA 0° ≤ 1000 N/mm² ≤ 3xD
23 110 ...	23 112 ...	23 010 ...
020	020	020
025	025	
030	030	030
040	040	040
050	050	050
060	060	060
080	080	080
100	100	100


23 111 ...	23 113 ...	23 021 ...
030		
040		
050		
060		
080		
100		
120	120	120
140		140
160	14000	160
	160	180
	18000	
200	200	200
	22000	
	240	
	27000	
	30000	
	33000	
	36000	

Through hole – Machine taps, right hand

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck


▲ NC = for synchronised CNC machining with minimum length compensation chuck

M

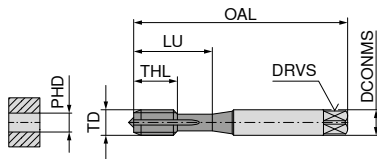

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M1,6	0,35	40	2,5	2,1	1,25	6	11	2
M2	0,40	45	2,8	2,1	1,60	7	12	2
M2,5	0,45	50	2,8	2,1	2,05	9	14	2
M3	0,50	56	3,5	2,7	2,50	11	18	3
M3	0,50	70	6,0	4,9	2,50	6	18	3
M3,5	0,60	56	4,0	3,0	2,90	12	20	3
M4	0,70	63	4,5	3,4	3,30	13	21	3
M4	0,70	70	6,0	4,9	3,30	7	21	3
M5	0,80	70	6,0	4,9	4,20	8	25	3
M5	0,80	70	6,0	4,9	4,20	15	25	3
M6	1,00	80	6,0	4,9	5,00	10	30	3
M6	1,00	80	6,0	4,9	5,00	17	30	3
M8	1,25	90	8,0	6,2	6,80	14	35	3
M8	1,25	90	8,0	6,2	6,80	20	35	3
M10	1,50	100	10,0	8,0	8,50	16	39	3
M10	1,50	100	10,0	8,0	8,50	22	39	3

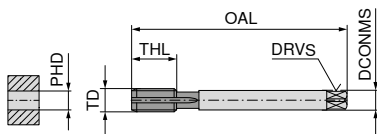

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	24	3
M12	1,75	110	10	8	10,2	18	3
M14	2,00	110	11	9	12,0	26	3
M16	2,00	110	12	9	14,0	22	3
M16	2,00	110	12	9	14,0	27	3
M20	2,50	140	16	12	17,5	32	3

P	15	15	12	15
M	9	8		
K	18	15	12	15
N	12	22	12	15
S				
H				
O				

Cutting speed v_c (m/min.)UNI
NCISO 2
6H

TiN GS

HSS-E
FHA 0°
≤ 1000 N/mm²
≤ 3xD

23 114 ...

030

040

050

060

080

100

UNI
NCWISO 2
6H

TiCN

HSS-PM
FHA 0°
≤ 1000 N/mm²
≤ 3xD

23 116 ...

030

040

050

060

080

100

FE

ISO 2
6H

TiCN

HSS-E
FHA 0°
≤ 850 N/mm²
≤ 3xD

23 212 ...

016

020

025

030

035

040

050

060

080

100

FE-HF

ISO 2
6H

TiCN

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 3xD

23 310 ...

030

040

050


060

080

100

Through hole – Machine taps, right hand


M

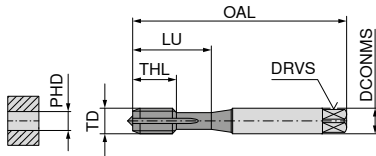

DIN 371 with reinforced shank

VA	VA	VA	AL	AL
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
TiN	nitr.	nitr.		CrN
HSS-E FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-PM FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 500 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 500 N/mm² ≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 412 ...	23 450 ...	23 410 ...	23 610 ...	23 612 ...
M2	0,40	45	2,8	2,1	1,60	7	12	2	020		020		
M2,5	0,45	50	2,8	2,1	2,05	9	14	2	025		025		
M3	0,50	56	3,5	2,7	2,50	11	18	3	030	030	030	030	030
M4	0,70	63	4,5	3,4	3,30	13	21	3	040	040	040	040	040
M5	0,80	70	6,0	4,9	4,20	15	25	3	050	050	050	050	050
M6	1,00	80	6,0	4,9	5,00	17	30	3	060	060	060	060	060
M8	1,25	90	8,0	6,2	6,80	20	35	3	080	080	080	080	080
M10	1,50	100	10,0	8,0	8,50	22	39	3	100	100	100	100	100



DIN 376 with reduced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 413 ...	23 451 ...	23 411 ...
M12	1,75	110	9	7,0	10,2	24	3	120	120	120
M14	2,00	110	11	9,0	12,0	26	3		140	
M16	2,00	110	12	9,0	14,0	27	3	160	160	160
M20	2,50	140	16	12,0	17,5	32	3	200	200	200
M24	3,00	160	18	14,5	21,0	34	3			240
P								10	8	8
M								8	6	6
K										
N								24	22	22
S										15
H										
O										20

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand


CavTap

M

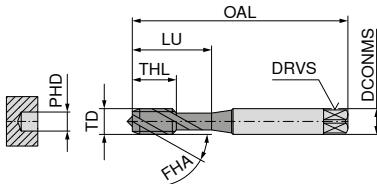

DIN 371 with reinforced shank


TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M2	0,40	45	2,8	2,1	1,60	4,0	12	2
M2,2	0,45	45	2,8	2,1	1,75	4,5	12	2
M2,3	0,40	45	2,8	2,1	1,90	4,5	12	2
M2,5	0,45	50	2,8	2,1	2,05	5,0	15	2
M2,6	0,45	50	2,8	2,1	2,15	5,0	15	2
M3	0,50	56	3,5	2,7	2,50	6,0	18	3
M3,5	0,60	56	4,0	3,0	2,90	7,0	20	3
M4	0,70	63	4,5	3,4	3,30	7,0	21	3
M5	0,80	70	6,0	4,9	4,20	8,0	25	3
M6	1,00	80	6,0	4,9	5,00	10,0	30	3
M7	1,00	80	7,0	5,5	6,00	10,0	30	3
M8	1,25	90	8,0	6,2	6,80	14,0	35	3
M10	1,50	100	10,0	8,0	8,50	16,0	39	3
M12	1,75	110	12,0	9,0	10,20	18,0	44	3



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M3	0,50	56	2,2	2,1	2,5	6	3
M4	0,70	63	2,8	2,1	3,3	7	3
M5	0,80	70	3,5	2,7	4,2	8	3
M6	1,00	80	4,5	3,4	5,0	10	3
M8	1,25	90	6,0	4,9	6,8	14	3
M10	1,50	100	7,0	5,5	8,5	16	3
M12	1,75	110	9,0	7,0	10,2	18	3
M14	2,00	110	11,0	9,0	12,0	20	3
M16	2,00	110	12,0	9,0	14,0	22	3
M18	2,50	125	14,0	11,0	15,5	25	3
M20	2,50	140	16,0	12,0	17,5	25	3
M22	2,50	140	18,0	14,5	19,5	27	4
M24	3,00	160	18,0	14,5	21,0	30	4
M27	3,00	160	20,0	16,0	24,0	30	4
M30	3,50	180	22,0	18,0	26,5	35	4
M33	3,50	180	25,0	20,0	29,5	35	4
M36	4,00	200	28,0	22,0	32,0	40	4

P	12	15	12	15
M	7	9	7	9
K	12	18	12	18
N		12		12
S				
H				
O				

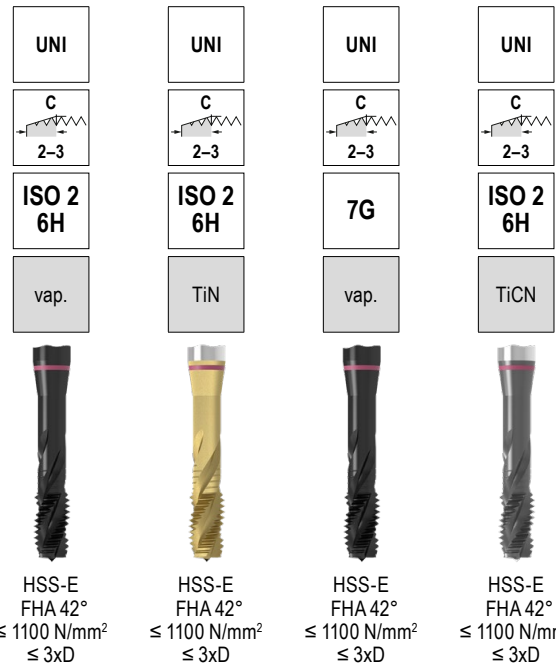Cutting speed v_c (m/min.)

22 518 ...

22 520 ...

22 532 ...

22 522 ...

020
022
023
025
026
030
035
040
050
060
070
080
100
120020

030

040
050
060

030

040
050
060

030

040
050
060

22 519 ...

22 521 ...

22 533 ...

030
040
050
060
080
100
120
140
160
180
200
220
240
270
300
330
360

120
140
160
180
200
220
240

120


160
200

Blind hole – Machine taps, right hand

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck


CavTap

M

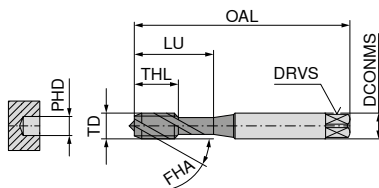

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	6	18	3
M3	0,50	70	6,0	4,9	2,5	6	18	3
M4	0,70	63	4,5	3,4	3,3	7	21	3
M4	0,70	70	6,0	4,9	3,3	7	21	3
M5	0,80	70	6,0	4,9	4,2	8	25	3
M6	1,00	80	6,0	4,9	5,0	10	30	3
M8	1,25	90	8,0	6,2	6,8	14	35	3
M10	1,50	100	10,0	8,0	8,5	16	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7,0	10,2	18	4
M12	1,75	110	10	8,0	10,2	18	3
M14	2,00	110	11	9,0	12,0	20	4
M16	2,00	110	12	9,0	14,0	22	3
M16	2,00	110	12	9,0	14,0	22	4
M18	2,50	125	14	11,0	15,5	25	4
M20	2,50	140	16	12,0	17,5	25	4
M22	2,50	140	18	14,5	19,5	27	5
M24	3,00	160	18	14,5	21,0	30	5

P	15	12	12	15
M	8	7	7	9
K	15	12	12	18
N	22			12
S				
H				
O				

UNI NCW	UNI	UNI	UNI
C 2-3	E 1,5-2	E 1,5-2	E 1,5-2
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
TiN	vap.	vap.	TiN
HSS-PM FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD
22 149 ...	22 524 ...	22 534 ...	22 526 ...
	030		030
		040	040
040			
050	050	050	050
060	060	060	060
080	080	080	080
100	100	100	100


Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck


CavTap

M

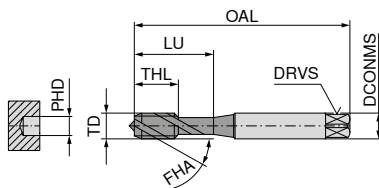

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	6	18	3
M4	0,70	63	4,5	3,4	3,3	7	21	3
M5	0,80	70	6,0	4,9	4,2	8	25	3
M6	1,00	80	6,0	4,9	5,0	10	30	3
M8	1,25	90	8,0	6,2	6,8	14	35	3
M10	1,50	100	10,0	8,0	8,5	16	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	18	3
M12	1,75	110	9	7	10,2	18	4
M14	2,00	110	11	9	12,0	20	3
M14	2,00	110	11	9	12,0	20	4
M16	2,00	110	12	9	14,0	22	3
M16	2,00	110	12	9	14,0	22	4
M20	2,50	140	16	12	17,5	25	3
M20	2,50	140	16	12	17,5	25	4

P	15	15	15	15
M	9	9	9	9
K	18	18	18	18
N	22	12	12	12
S				
H				
O				

Cutting speed v_c (m/min.)

UNI CNC	UNI CNC	UNI CNC	UNI CNC
C 2-3	C 2-3	E 1,5-2	C 2-3
ISO 2X 6HX	ISO 2 6H	ISO 2 6H	7G
TiN	TiN GS	TiN GS	TiN GS

HSS-E
FHA 50°
≤ 1100 N/mm²
≤ 3xD

22 416 ...

HSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xD

22 544 ...

HSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xD

22 546 ...

HSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xD

22 594 ...

Blind hole – Machine taps, right hand

▲ DRY = for dry machining or minimum quantity lubrication (MMS)

CavTap


M

UNI
DRYC
2-3ISO 2
6H

TiN

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 449 ...

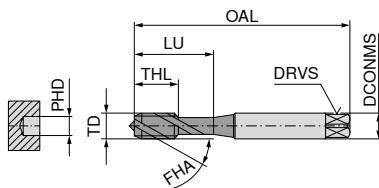

DIN 371 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M5	0,80	70	6	4,9	4,2	8	25	3
M6	1,00	80	6	4,9	5,0	10	30	3
M8	1,25	90	8	6,2	6,8	14	35	3
M10	1,50	100	10	8,0	8,5	16	39	3

050

060

080

100



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	18	4
M16	2,00	110	12	9	14,0	22	4
M20	2,50	140	16	12	17,5	25	4

22 450 ...

120

160

200

P	12
M	
K	12
N	22
S	
H	
O	

Cutting speed v_c (m/min.)


Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

▲ TS = for high-speed machining, up to 100 m/min.


CavTap
SL

M

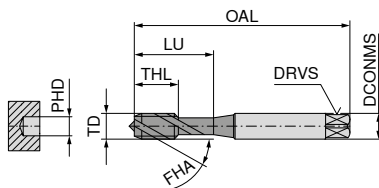

DIN 371 with reinforced shank




TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	6	18	2
M3	0,50	56	3,5	2,7	2,5	11	18	3
M4	0,70	63	4,5	3,4	3,3	7	21	3
M4	0,70	63	4,5	3,4	3,3	13	21	3
M5	0,80	70	6,0	4,9	4,2	8	25	3
M5	0,80	70	6,0	4,9	4,2	15	25	3
M6	1,00	80	6,0	4,9	5,0	10	30	3
M6	1,00	80	6,0	4,9	5,0	17	30	3
M8	1,25	90	8,0	6,2	6,8	14	35	3
M8	1,25	90	8,0	6,2	6,8	20	35	3
M10	1,50	100	10,0	8,0	8,5	16	39	3
M10	1,50	100	10,0	8,0	8,5	22	39	3
M12	1,75	110	12,0	9,0	10,2	24	44	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	18	3
M16	2,00	110	12	9	14,0	22	3
M20	2,50	140	16	12	17,5	25	3

P	65	12	8	12
M		8	8	8
K	65	20		20
N	22	22	10	22
S			4	
H				
O				

Cutting speed v_c (m/min.)HSS-E
FHA 15°
≤ 1050 N/mm²
≤ 2xD

22 406 ...

030
040
050
060
080
100HSS-E
FHA 15°
≤ 1100 N/mm²
≤ 2xD

22 328 ...

030
040
050
060
080
100HSS-PM
FHA 25°
≤ 1400 N/mm²
≤ 2xD

22 469 ...

03000
04000
05000
06000
08000
10000
12000HSS-E
FHA 15°
≤ 1100 N/mm²
≤ 2xD

22 443 ...


050
060
080
100

Blind hole – Machine taps

▲ LH = for left hand threads


CavTap

M

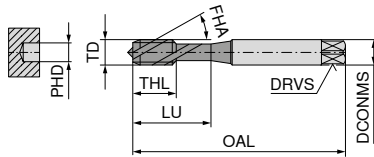

DIN 371 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M2	0,40	45	2,8	2,1	1,60	4,0	12	2
M2,3	0,40	45	2,8	2,1	1,90	4,5	12	2
M2,5	0,45	50	2,8	2,1	2,05	5,0	15	2
M3	0,50	56	3,5	2,7	2,50	6,0	18	3
M3,5	0,60	56	4,0	3,0	2,90	7,0	20	3
M4	0,70	63	4,5	3,4	3,30	7,0	21	3
M5	0,80	70	6,0	4,9	4,20	8,0	25	3
M6	1,00	80	6,0	4,9	5,00	10,0	30	3
M8	1,25	90	8,0	6,2	6,80	14,0	35	3
M10	1,50	100	10,0	8,0	8,50	16,0	39	3



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M3	0,50	56	2,2		2,5	6	3
M4	0,70	63	2,8	2,1	3,3	7	3
M5	0,80	70	3,5	2,7	4,2	8	3
M6	1,00	80	4,5	3,4	5,0	10	3
M8	1,25	90	6,0	4,9	6,8	14	3
M10	1,50	100	7,0	5,5	8,5	16	3
M12	1,75	110	9,0	7,0	10,2	18	3
M14	2,00	110	11,0	9,0	12,0	20	3
M16	2,00	110	12,0	9,0	14,0	22	3
M18	2,50	125	14,0	11,0	15,5	25	3
M20	2,50	140	16,0	12,0	17,5	25	3

P	12	15	12
M			
K	12	15	12
N	12	15	22
S			
H			
O			

Cutting speed v_c (m/min.)

ST	ST	ST LH
C	C	C
2-3	2-3	2-3
ISO 2 6H	ISO 2 6H	ISO 2 6H
	TiN	
HSS-E FHA 42° ≤ 750 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 750 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 750 N/mm² ≤ 3xD
22 082 ...	22 084 ...	22 138 ...
020	020	
023		
025		
030	030	030
035		
040	040	040
050	050	050
060	060	060
080	080	080
100	100	100


22 083 ...	22 085 ...	22 139 ...
030		
040		
050		
060		
080		
	100	
120	120	120
140		
160	160	160
180		
200	200	200

Blind hole – Machine taps, right hand

▲ TS = for high-speed machining, up to 100 m/min.


CavTap

M

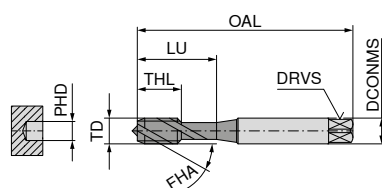

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	6	18	3
M4	0,70	63	4,5	3,4	3,3	7	21	3
M5	0,80	70	6,0	4,9	4,2	8	25	3
M6	1,00	80	6,0	4,9	5,0	10	30	3
M8	1,25	90	8,0	6,2	6,8	14	35	3
M10	1,50	100	10,0	8,0	8,5	16	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	18	4
M16	2,00	110	12	9	14,0	22	4

P	6	8	65	65
M	6	8		
K			65	65
N	8	12	75	75
S				
H				
O				


Cutting speed v_c (m/min.)

HR	HR	ST TS	ST TS
C 2-3	C 2-3	C 2-3	C 2-3
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	OSM	TiN	TiN
HSS-PM FHA 42° ≤ 1400 N/mm² ≤ 3xD	HSS-PM FHA 42° ≤ 1400 N/mm² ≤ 3xD	HSS-E FHA 40° ≤ 1100 N/mm² ≤ 2xD	HSS-E FHA 40° ≤ 1100 N/mm² ≤ 2xD
22 498 ...	22 499 ...	22 046 ...	22 044 ...
030	030		
040	040		040
050	050	050	050
060	060	060	060
080	080	080	080
100	100	100	100

Blind hole – Machine taps, right hand


CavTap

M

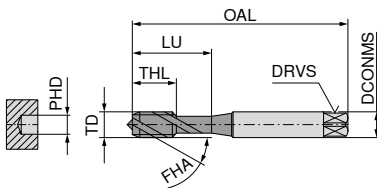

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M1,6	0,35	40	2,5	2,1	1,25	4	11	2
M2	0,40	45	2,8	2,1	1,60	4	12	2
M2,5	0,45	50	2,8	2,1	2,05	5	15	2
M2,5	0,45	50	2,8	2,1	2,05	5	15	3
M3	0,50	56	3,5	2,7	2,50	6	18	3
M4	0,70	63	4,5	3,4	3,30	7	21	3
M5	0,80	70	6,0	4,9	4,20	8	25	3
M6	1,00	80	6,0	4,9	5,00	10	30	3
M8	1,25	90	8,0	6,2	6,80	14	35	3
M10	1,50	100	10,0	8,0	8,50	16	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7,0	10,2	18	4
M14	2,00	110	11	9,0	12,0	20	4
M16	2,00	110	12	9,0	14,0	22	4
M20	2,50	140	16	12,0	17,5	25	4
M22	2,50	140	18	14,5	19,5	27	5
M24	3,00	160	18	14,5	21,0	30	5
M30	3,50	180	22	18,0	26,5	35	5

P	8	10	10
M	6	8	8
K			
N			
S			
H			
O			

Cutting speed v_c (m/min.)

VA	VA	VA
C 2-3	E 1,5-2	C 2-3
ISO 2 6H	ISO 2 6H	ISO 2 6H
vap.	TiN GS	TiN GS
HSS-E FHA 42° ≤ 900 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 900 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 900 N/mm² ≤ 3xD
22 090 ...	22 042 ...	22 040 ...
020		016
025		020
030		025
040		030
050	050	040
060	060	050
080	080	060
100	100	080
		100

22 091 ...


22 041 ...

120
140
160
200
220
240
300120
140
160
200

Blind hole – Machine taps, right hand


CavTap

M

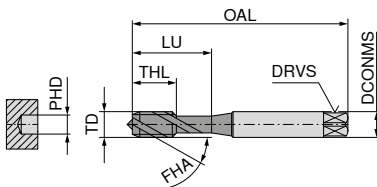

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M2	0,40	45	2,8	2,1	1,60	4	12	2
M2,5	0,45	50	2,8	2,1	2,05	5	15	2
M2,5	0,45	50	2,8	2,1	2,05	5	14	2
M3	0,50	56	3,5	2,7	2,50	6	18	2
M3	0,50	56	3,5	2,7	2,50	6	18	3
M4	0,70	63	4,5	3,4	3,30	7	21	2
M4	0,70	63	4,5	3,4	3,30	7	21	3
M5	0,80	70	6,0	4,9	4,20	8	25	2
M5	0,80	70	6,0	4,9	4,20	8	25	3
M6	1,00	80	6,0	4,9	5,00	10	30	2
M6	1,00	80	6,0	4,9	5,00	10	30	3
M8	1,25	90	8,0	6,2	6,80	14	35	2
M8	1,25	90	8,0	6,2	6,80	14	35	3
M10	1,50	100	10,0	8,0	8,50	16	39	2
M10	1,50	100	10,0	8,0	8,50	16	39	3




DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	18	3
M14	2,00	110	11	9	12,0	20	3
M16	2,00	110	12	9	14,0	22	3
M20	2,50	140	16	12	17,5	25	3

22 461 ...

P	15	15
M		
K		
N	22	22
S		15
H		
O		

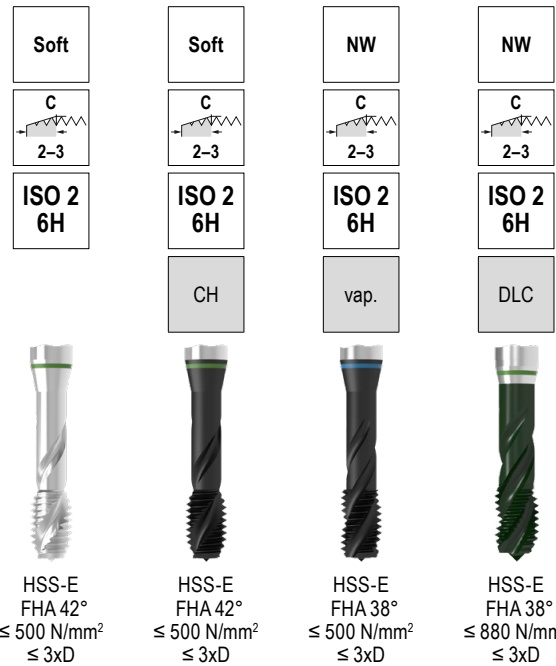Cutting speed v_c (m/min.)

22 326 ...

22 324 ...

22 086 ...

22 460 ...

020

020

020

02000

025

025

025

02500

030

030

030

03000

040

040

040

04000

050

050

050

05000

060

060

060

06000

080

080

080

08000

100

100


100

10000

Blind hole – Machine taps, right hand


CavTap
SL

M

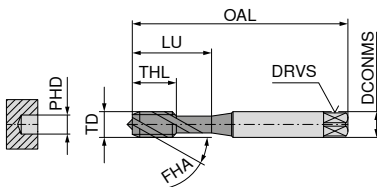

DIN 371 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,5	11	18	2
M3	0,50	56	3,5	2,7	2,5	6	18	3
M3,5	0,60	56	4,0	3,0	2,9	12	20	3
M4	0,70	63	4,5	3,4	3,3	7	21	3
M4	0,70	63	4,5	3,4	3,3	13	21	3
M5	0,80	70	6,0	4,9	4,2	8	25	3
M5	0,80	70	6,0	4,9	4,2	15	25	3
M6	1,00	80	6,0	4,9	5,0	10	30	3
M6	1,00	80	6,0	4,9	5,0	17	30	3
M8	1,25	90	8,0	6,2	6,8	14	35	3
M8	1,25	90	8,0	6,2	6,8	20	35	3
M10	1,50	100	10,0	8,0	8,5	16	39	3
M10	1,50	100	10,0	8,0	8,5	22	39	3
M12	1,75	110	12,0	9,0	10,2	18	44	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7,0	10,2	24	3
M14	2,00	110	11	9,0	12,0	26	3
M16	2,00	110	12	9,0	14,0	27	3
M20	2,50	140	16	12,0	17,5	32	3
M24	3,00	160	18	14,5	21,0	34	3

P	7	7
M	7	7
K		
N	22	22
S	5	2
H		
O		

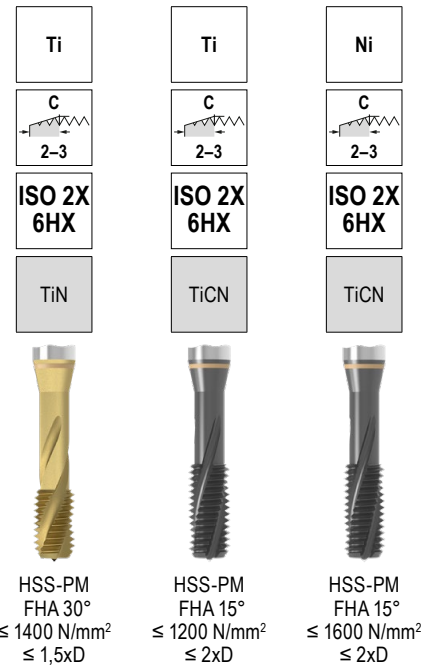Cutting speed v_c (m/min.)

22 076 ...

22 163 ...

22 424 ...

030

030

030

040

035

040

050

040

040

060

050

050

080

060

060

100

080

080

120

100

100

22 164 ...

22 425 ...

120

120

140

140

160

160

200

200

240

240

Blind hole – Machine taps, right hand


▲ ES = extra short

CavTap

M

UNI
ESE
1,5-2ISO 2
6H

vap.

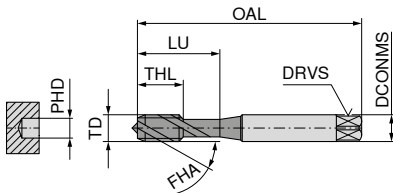

DIN 352 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 500 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	
M3	0,50	40	3,5	2,7	2,5	6	18	3	030
M4	0,70	45	4,5	3,4	3,3	7	22	3	040
M5	0,80	50	6,0	4,9	4,2	9	25	3	050
M6	1,00	56	6,0	4,9	5,0	10	28	3	060
M8	1,25	63	6,0	4,9	6,8	14		3	080
M10	1,50	70	7,0	5,5	8,5	16		3	100
M12	1,75	75	9,0	7,0	10,2	18		4	120
M16	2,00	80	12,0	9,0	14,0	22		4	160
P									12
M									7
K									12
N									
S									
H									
O									


Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ ES = extra short

CavTap
SL

M

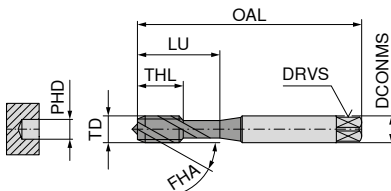ST
ESC
2-3ISO 2
6H

DIN 352 with reinforced shank

HSS-E
FHA 15°
≤ 750 N/mm²
≤ 2xD

22 016 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	40	3,5	2,7	2,5	10	18	2
M4	0,70	45	4,5	3,4	3,3	12	22	3
M5	0,80	50	6,0	4,9	4,2	14	25	3
M6	1,00	56	6,0	4,9	5,0	16	28	3
M8	1,25	63	6,0	4,9	6,8	20		3
M10	1,50	70	7,0	5,5	8,5	22		3
M12	1,75	75	9,0	7,0	10,2	24		3

P	12
M	
K	12
N	12
S	
H	
O	


Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ EL = extra long, with double overall length


CavTap

M

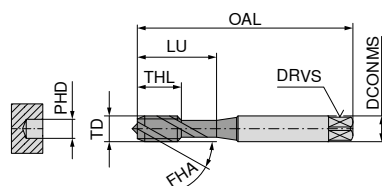

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	100	3,5	2,7	2,5	6	18	3
M4	0,70	125	4,5	3,4	3,3	7	21	3
M5	0,80	140	6,0	4,9	4,2	8	25	3
M6	1,00	160	6,0	4,9	5,0	10	30	3
M8	1,25	180	8,0	6,2	6,8	14	35	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M6	1,00	160	4,5	3,4	5,0	10	3
M8	1,25	180	6,0	4,9	6,8	14	3
M10	1,50	200	7,0	5,5	8,5	16	3
M12	1,75	224	9,0	7,0	10,2	18	3
M14	2,00	224	11,0	9,0	12,0	20	3
M16	2,00	224	12,0	9,0	14,0	22	3
M18	2,50	250	14,0	11,0	15,5	25	3
M20	2,50	280	16,0	12,0	17,5	25	3

P	12	12
M		7
K	12	12
N	22	
S		
H		
O		

Cutting speed v_c (m/min.)ST
ELC
2-3ISO 2
6HHSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

22 422 ...

030
040
050
060
080UNI
ELC
2-3ISO 2
6H

vap.

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 538 ...

030
040
050
060
080

22 539 ...


060
080
100
120
140
160
180
200

Blind hole – Machine taps, right hand

▲ EL = extra long, with double overall length

CavTap
SL

M

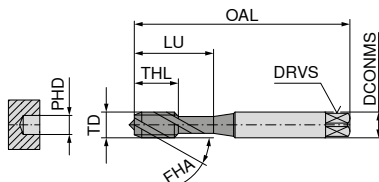ST
ELISO 2
6H

DIN 371 with reinforced shank

HSS-E
FHA 15°
≤ 750 N/mm²
≤ 2xD

22 078 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	100	3,5	2,7	2,5	11	18	2
M4	0,70	125	4,5	3,4	3,3	13	21	3
M5	0,80	140	6,0	4,9	4,2	15	25	3
M6	1,00	160	6,0	4,9	5,0	17	30	3
M8	1,25	180	8,0	6,2	6,8	20	35	3


030

040

050

060

080



DIN 376 with reduced shank

22 080 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M6	1,00	160	4,5	3,4	5,0	17	3
M8	1,25	180	6,0	4,9	6,8	20	3
M10	1,50	200	7,0	5,5	8,5	22	3
M12	1,75	224	9,0	7,0	10,2	24	3
M14	2,00	224	11,0	9,0	12,0	26	3
M16	2,00	224	12,0	9,0	14,0	27	3
M20	2,50	280	16,0	12,0	17,5	32	3

060

080

100

120

140

160

200


P	12
M	
K	12
N	12
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand


▲ NC = for synchronised CNC machining with minimum length compensation chuck

M

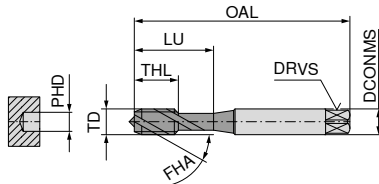

DIN 371 with reinforced shank

UNI	UNI	UNI	UNI	UNI NC
				
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
vap.	TiN	TiN	TiCN	TiN GS
				
HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-PM FHA 50° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 45° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 1000 N/mm² ≤ 3xD
23 118 ...	23 120 ...	23 026 ...	23 122 ...	23 124 ...
020 025 030 040 050 060 080 100	020 025 030 040 050 060 080 100	030 040 050 060 080 100	030 040 050 060 080 100	030 040 050 060 080 100



DIN 376 with reduced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes							
M3	0,50	56	2,2	2,1	2,5	6	3	030						
M4	0,70	63	2,8	2,1	3,3	7	3	040						
M5	0,80	70	3,5	2,7	4,2	8	3	050						
M6	1,00	80	4,5	3,4	5,0	10	3	060						
M8	1,25	90	6,0	4,9	6,8	14	3	080						
M10	1,50	100	7,0	5,5	8,5	16	3	100						
M12	1,75	110	9,0	7,0	10,2	18	3	120						
M12	1,75	110	9,0	7,0	10,2	18	4							
M14	2,00	110	11,0	9,0	12,0	20	3							
M14	2,00	110	11,0	9,0	12,0	20	4							
M16	2,00	110	12,0	9,0	14,0	22	3	160						
M16	2,00	110	12,0	9,0	14,0	22	4							
M18	2,50	125	14,0	11,0	15,5	25	3							
M20	2,50	140	16,0	12,0	17,5	25	3	200						
M20	2,50	140	16,0	12,0	17,5	25	4							
M22	2,50	140	18,0	14,5	19,5	27	4							
M24	3,00	160	18,0	14,5	21,0	34	4							
M27	3,00	160	20,0	16,0	24,0	30	4							
M30	3,50	180	22,0	18,0	26,5	35	4							
M33	3,50	180	25,0	20,0	29,5	35	4							
M36	4,00	200	28,0	22,0	32,0	40	4							
P								12		15		15		15
M								7		9		9		9
K								12		18		18		18
N										12		12		12
S														
H														
O														

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand


▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck

M

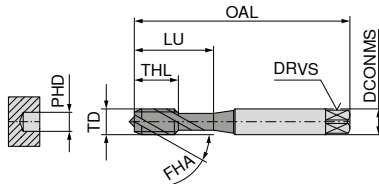

DIN 371 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M2	0,40	45	2,8	2,1	1,60	4	12	2
M2,5	0,45	50	2,8	2,1	2,05	5	14	2
M3	0,50	56	3,5	2,7	2,50	6	18	3
M3	0,50	70	6,0	4,9	2,50	6	18	3
M4	0,70	63	4,5	3,4	3,30	7	21	3
M4	0,70	70	6,0	4,9	3,30	7	21	3
M5	0,80	70	6,0	4,9	4,20	8	25	3
M6	1,00	80	6,0	4,9	5,00	10	30	3
M8	1,25	90	8,0	6,2	6,80	14	35	3
M10	1,50	100	10,0	8,0	8,50	16	39	3



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M12	1,75	110	10	8,0	10,2	18	3
M12	1,75	110	9	7,0	10,2	18	3
M14	2,00	110	11	9,0	12,0	20	3
M16	2,00	110	12	9,0	14,0	22	3
M20	2,50	140	16	12,0	17,5	25	3
M24	3,00	160	18	14,5	21,0	30	4


P	15	12	15	8
M	8			6
K	15	12	15	
N	22	22	24	22
S				
H				
O				

Cutting speed v_c (m/min.)

UNI NCW	FE	FE-HF	VA
C 2-3	C 2-3	C 2-3	C 2-3
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
TiCN		TiCN	
HSS-PM FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 850 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 1100 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 1200 N/mm² ≤ 2,5xD
23 126 ...	23 216 ...	23 312 ...	23 414 ...
	020		020
	025		025
030	030	030	030
040	040	040	040
050	050	050	050
060	060	060	060
080	080	080	080
100	100	100	100

Blind hole – Machine taps, right hand


M

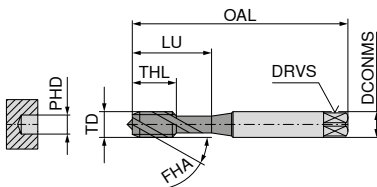

DIN 371 with reinforced shank

VA	VA	VA	AL	AL
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
TiN		TiN		CrN
HSS-E FHA 45° ≤ 1200 N/mm² ≤ 3xD	HSS-PM FHA 40° ≤ 1200 N/mm² ≤ 2,5xD	HSS-PM FHA 40° ≤ 1200 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 500 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 500 N/mm² ≤ 2,5xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 416 ...	23 426 ...	23 456 ...	23 616 ...	23 614 ...
M2	0,40	45	2,8	2,1	1,60	4	12	2	020				
M2,5	0,45	50	2,8	2,1	2,05	5	14	2	025				
M3	0,50	56	3,5	2,7	2,50	6	18	3	030				
M4	0,70	63	4,5	3,4	3,30	7	21	3	040	030	030	030	030
M5	0,80	70	6,0	4,9	4,20	8	25	3	050	040	040	040	040
M6	1,00	80	6,0	4,9	5,00	10	30	3	060	050	050	050	050
M8	1,25	90	8,0	6,2	6,80	14	35	3	080	060	060	060	060
M10	1,50	100	10,0	8,0	8,50	16	39	3	100	080	080	080	080



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 417 ...	23 427 ...	23 457 ...	23 615 ...
M12	1,75	110	9	7,0	10,2	18	3		120	120	120
M12	1,75	110	9	7,0	10,2	18	4	120			
M14	2,00	110	11	9,0	12,0	20	4		140	140	
M16	2,00	110	12	9,0	14,0	22	3		160	160	
M16	2,00	110	12	9,0	14,0	22	4	160			
M20	2,50	140	16	12,0	17,5	25	3		200	200	
M20	2,50	140	16	12,0	17,5	25	4	200			
M24	3,00	160	18	14,5	21,0	30	4		240		


P	10	8	10		
M	8	6	8		
K					
N	24	22	24	15	20
S					
H					
O					

Cutting speed v_c (m/min.)



Through hole / Blind hole – Machine taps, right hand

DuoTap

M

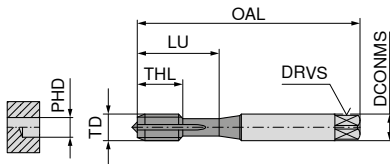

DIN 371 with reinforced shank

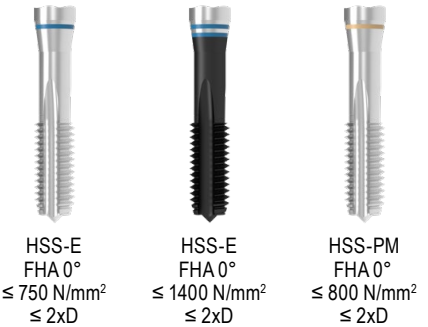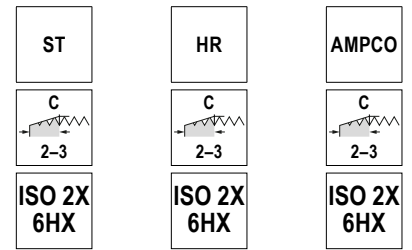

22 028 ...	22 006 ...	22 030 ...
012 ¹⁾		
014 ¹⁾		
016		
017		
018		
020		
022		
023		
025		
026		
030	030	030
035		
040	040	040
050	050	050
060	060	060
070		
080	080	080
100	100	100

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M1,2	0,25	40	2,5	2,1	0,95	5	5	2
M1,4	0,30	40	2,5	2,1	1,10	6	6	2
M1,6	0,35	40	2,5	2,1	1,25	6	11	2
M1,7	0,35	40	2,5	2,1	1,35	6	11	2
M1,8	0,35	40	2,5	2,1	1,45	6	11	2
M2	0,40	45	2,8	2,1	1,60	7	12	3
M2,2	0,45	45	2,8	2,1	1,75	7	12	3
M2,3	0,40	45	2,8	2,1	1,90	7	12	3
M2,5	0,45	50	2,8	2,1	2,05	9	14	3
M2,6	0,45	50	2,8	2,1	2,15	9	14	3
M3	0,50	56	3,5	2,7	2,50	11	18	3
M3,5	0,60	56	4,0	3,0	2,90	12	20	3
M4	0,70	63	4,5	3,4	3,30	13	21	3
M5	0,80	70	6,0	4,9	4,20	15	25	3
M6	1,00	80	6,0	4,9	5,00	17	30	3
M7	1,00	80	7,0	5,5	6,00	17	30	3
M8	1,25	90	8,0	6,2	6,80	20	35	3
M10	1,50	100	10,0	8,0	8,50	22	39	3

P	12	6	
M			
K	12	16	
N		12	8
S			
H			
O			

1) Tol. 4H/5H ≤ M1.4


Cutting speed v_c (m/min.)

DIN 376 can be found on the next page

Through hole / Blind hole – Machine taps, right hand

DuoTap

M



DIN 376 with reduced shank

ST	HR	AMPCO
		
ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX

nitr.



HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xD



HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD



HSS-PM
FHA 0°
≤ 800 N/mm²
≤ 2xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M4	0,70	63	2,8	2,1	3,3	13	3
M5	0,80	70	3,5	2,7	4,2	15	3
M6	1,00	80	4,5	3,4	5,0	17	3
M8	1,25	90	6,0	4,9	6,8	20	3
M10	1,50	100	7,0	5,5	8,5	22	3
M12	1,75	110	9,0	7,0	10,2	24	3
M12	1,75	110	9,0	7,0	10,2	24	4
M14	2,00	110	11,0	9,0	12,0	26	3
M16	2,00	110	12,0	9,0	14,0	27	3
M16	2,00	110	12,0	9,0	14,0	27	4
M18	2,50	125	14,0	11,0	15,5	30	4
M20	2,50	140	16,0	12,0	17,5	32	4
M22	2,50	140	18,0	14,5	19,5	32	4
M24	3,00	160	18,0	14,5	21,0	34	4
M33	3,50	180	25,0	20,0	29,5	40	4

22 029 ...

040
050
060
080
100
120
140
160
180
200
220
240
330

22 007 ...

120
160

22 031 ...

120
160
200
240


P	12	6	
M			
K	12	16	
N		12	8
S			
H			
O			

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand


DuoTap

M

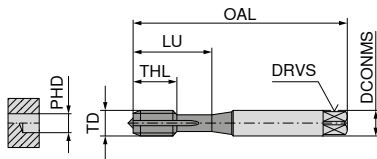

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M2	0,40	45	2,8	2,1	1,60	7	12	3
M2,5	0,45	50	2,8	2,1	2,05	9	14	3
M3	0,50	56	3,5	2,7	2,50	11	18	3
M3,5	0,60	56	4,0	3,0	2,90	12	20	3
M4	0,70	63	4,5	3,4	3,30	13	21	3
M5	0,80	70	6,0	4,9	4,20	15	25	3
M6	1,00	80	6,0	4,9	5,00	17	30	3
M8	1,25	90	8,0	6,2	6,80	20	35	3
M10	1,50	100	10,0	8,0	8,50	22	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M6	1,00	80	4,5	3,4	5,0	17	3
M8	1,25	90	6,0	4,9	6,8	20	3
M10	1,50	100	7,0	5,5	8,5	22	3
M12	1,75	110	9,0	7,0	10,2	24	3
M14	2,00	110	11,0	9,0	12,0	26	3
M16	2,00	110	12,0	9,0	14,0	27	3
M18	2,50	125	14,0	11,0	15,5	30	4
M20	2,50	140	16,0	12,0	17,5	32	4
M22	2,50	140	18,0	14,5	19,5	32	4
M24	3,00	160	18,0	14,5	21,0	34	4

P		
M		
K	16	16
N	12	12
S		
H		
O		

Cutting speed v_c (m/min.)

22 036 ...

22 032 ...

050
060
080
100020
025
030
035
040
050
060
080
100


22 033 ...

060
080
100
120
140
160
180
200
220
240

Through hole / Blind hole – Machine taps, right hand


DuoTap

M

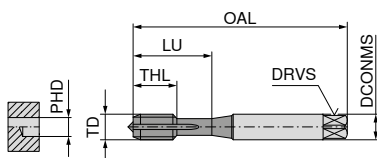

DIN 371 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	63	4,5	3,4	2,55	6	18	4
M4	0,70	63	4,5	3,4	3,40	8	20	4
M5	0,80	70	6,0	4,9	4,30	10	26	4
M6	1,00	80	6,0	4,9	5,00	10	30	4
M6	1,00	80	6,0	4,9	5,10	12	28	4
M8	1,25	90	8,0	6,2	6,80	14	35	5
M8	1,25	90	8,0	6,2	6,90	15	35	5
M10	1,50	100	10,0	8,0	8,50	18	38	5
M10	1,50	100	10,0	8,0	8,50	16	39	5
M12	1,75	110	12,0	9,0	10,40	21	41	5
M16	2,00	110	16,0	12,0	14,20	24	44	6



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,4	18	5
M16	2,00	110	12	9	14,2	22	6

P		
M		
K		
N		22
S		
H	2	2
O		

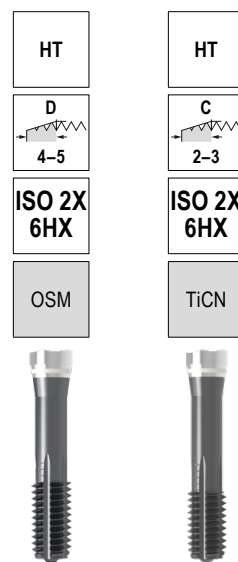Cutting speed v_c (m/min.)Solid carbide
FHA 0°
≤ 63 HRC
≤ 1,5xDHSS-PM
FHA 0°
44 - 52 HRC
≤ 1,5xD

22 806 ...

22 227 ...

030

040

050

060

080

100

120

160

060

080

100

22 228 ...

120

160

Through hole / Blind hole – Machine taps, right hand


▲ EL = extra long, with double overall length

DuoTap

M

HR
ELC
2-3ISO 2X
6HX

nitr.

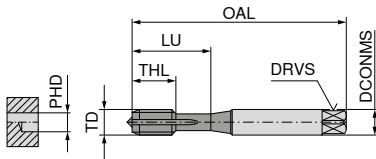


DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

22 122 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	100	3,5	2,7	2,5	11	18	3
M4	0,70	125	4,5	3,4	3,3	13	21	3
M5	0,80	140	6,0	4,9	4,2	15	25	3
M6	1,00	160	6,0	4,9	5,0	17	30	3
M8	1,25	180	8,0	6,2	6,8	20	35	3

030
040
050
060
080

DIN 376 with reduced shank

22 123 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M10	1,50	200	7	5,5	8,5	22	3
M12	1,75	224	9	7,0	10,2	24	3
M16	2,00	224	12	9,0	14,0	27	3
M20	2,50	280	16	12,0	17,5	32	4


100
120
160
200

P	6
M	
K	16
N	22
S	
H	
O	

Cutting speed v_c (m/min.)


Through hole / Blind hole – Machine taps, right hand

M

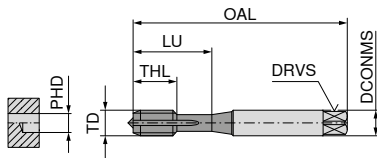

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M5	0,80	70	6	4,9	4,2	15	25	3
M6	1,00	80	6	4,9	5,0	17	30	3
M8	1,25	90	8	6,2	6,8	20	35	3
M10	1,50	100	10	8,0	8,5	22	39	3



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	10,2	24	3

P	
M	
K	20
N	24
S	
H	
O	

Cutting speed v_c (m/min.)

GG

ISO 2X
6HX

TiCN

HSS-E
FHA 0°
 $\leq 900 \text{ N/mm}^2$
 $\leq 2xD$

23 512 ...

050

060

080


100

23 513 ...

120

Through hole / Blind hole – Machine thread formers, right hand


▲ HML = with soldered-in carbide strips for a higher cutting speed

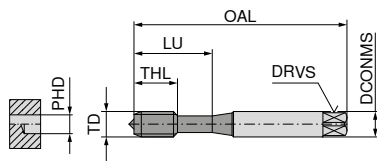

DIN 2174 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU
mm	mm	mm	mm	mm	mm	mm	mm
M1	0,25	40	2,5	2,1	0,90	5	6,5
M1,2	0,25	40	2,5	2,1	1,10	5	6,5
M1,4	0,30	40	2,5	2,1	1,28	6	9,0
M1,6	0,35	40	2,5	2,1	1,47	6	9,0
M1,7	0,35	40	2,5	2,1	1,57	6	9,0
M2	0,40	45	2,8	2,1	1,85	7	10,0
M2,5	0,45	50	2,8	2,1	2,33	9	14,0
M2,6	0,45	50	2,8	2,1	2,43	9	14,0
M3	0,50	56	3,5	2,7	2,80	11	18,0
M3,5	0,60	56	4,0	3,0	3,25	12	20,0
M4	0,70	63	4,5	3,4	3,70	13	21,0
M5	0,80	70	6,0	4,9	4,65	15	25,0
M6	1,00	80	6,0	4,9	5,60	17	30,0
M6	1,00	80	6,0	5,0	5,60	18	30,0
M8	1,25	90	8,0	6,2	7,40	20	35,0
M8	1,25	90	8,0	6,0	7,45	18	35,0
M8	1,25	90	8,0	6,2	7,45	20	35,0
M10	1,50	100	10,0	8,0	9,35	22	39,0

1) Tol. ISO 1X 4HX ≤ M1.4

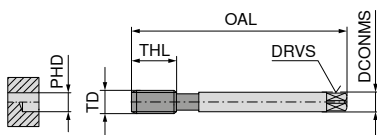

DIN 2174 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL
mm	mm	mm	mm	mm	mm	mm
M12	1,75	110	9	7	11,25	24
M16	2,00	110	12	9	15,10	27

P		18	18
M		10	10
K		10	10
N	30	18	22
S			
H			
O			

Cutting speed v_c (m/min.)

NEW

NW
HMLISO 2X
6HX

HCr

HSS-E / HM
≤ 880 N/mm²
≤ 3xD

22 473 ...

EC

ISO 2X
6HX

TiN

HSS-E
≤ 1100 N/mm²
≤ 1,5xD

22 128 ...

EC

ISO 2X
6HX

TiN

HSS-E
≤ 1100 N/mm²
≤ 1,5xD

22 100 ...

010 ¹⁾012 ¹⁾014 ¹⁾

016

017

020

025

026

030

035

040

050

060

080

100


22 101 ...

120


160

Through hole / Blind hole – Machine thread formers, right hand


▲ SN = Thread formers with lubrication grooves

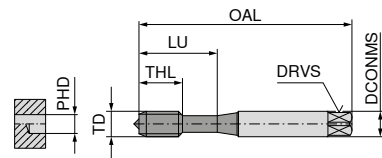

DIN 2174 with reinforced shank

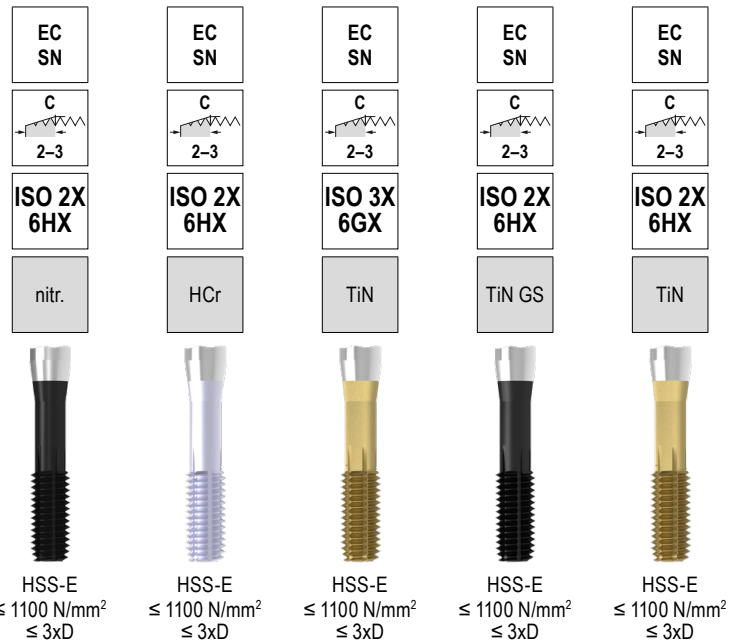

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 104 ...	22 107 ...	22 108 ...	22 154 ...	22 105 ...
M2	0,40	45	2,8	2,1	1,85	7	10	3					020
M2,5	0,45	50	2,8	2,1	2,33	9	14	3					025
M3	0,50	56	3,5	2,7	2,80	11	18	3	030	030	030	030	030
M3,5	0,60	56	4,0	3,0	3,25	12	20	3					035
M4	0,70	63	4,5	3,4	3,70	13	21	4	040	040	040	040	040
M5	0,80	70	6,0	4,9	4,65	15	25	4	050	050	050	050	
M5	0,80	70	6,0	4,9	4,65	15	25	5					050
M6	1,00	80	6,0	4,9	5,60	17	30	4	060	060	060	060	060
M8	1,25	90	8,0	6,2	7,45	20	35	5	080	080	080	080	080
M10	1,50	100	10,0	8,0	9,35	22	39	6	100	100	100	100	100

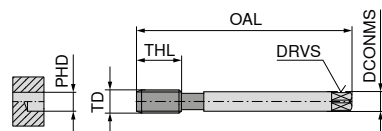

DIN 2174 with reduced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 106 ...
M12	1,75	110	9	7	11,25	24	6	120
M14	2,00	110	11	9	13,10	26	5	140
M16	2,00	110	12	9	15,10	27	7	160

P	12	18	18	18	18
M		10	10	10	10
K	8	10	10	10	10
N	12	18	22	22	22
S					
H					
O					

Cutting speed v_c (m/min.)


Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

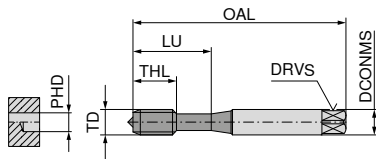

DIN 2174 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3	0,50	56	3,5	2,7	2,80	11	18	4
M4	0,70	63	4,5	3,4	3,70	13	21	4
M5	0,80	70	6,0	4,9	4,65	15	25	4
M6	1,00	80	6,0	4,9	5,60	17	30	5
M8	1,25	90	8,0	6,2	7,45	20	35	5
M10	1,50	100	10,0	8,0	9,35	22	39	5



DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7	11,25	24	6
M16	2,00	110	12	9	15,10	27	6

P	18	18
M	10	10
K	10	10
N	22	22
S		
H		
O		

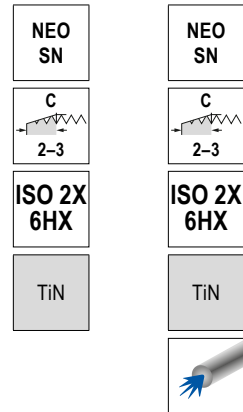
Cutting speed v_c (m/min.)

22 452 ...	22 453 ...
030	
040	
050	050
060	060
080	080
100	100

Through hole / Blind hole – Machine thread formers, right hand


▲ SN = Thread formers with lubrication grooves

M

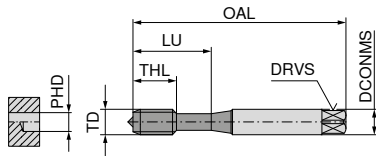

DIN 2174 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M2	0,40	45	2,8	2,1	1,85	7	12	
M2	0,40	45	2,8	2,1	1,85	7	12	3
M2,5	0,45	50	2,8	2,1	2,33	9	14	
M2,5	0,45	50	2,8	2,1	2,33	9	14	3
M3	0,50	56	3,5	2,7	2,80	11	18	
M3	0,50	56	3,5	2,7	2,80	11	18	3
M4	0,70	63	4,5	3,4	3,70	13	21	
M4	0,70	63	4,5	3,4	3,70	13	21	4
M5	0,80	70	6,0	4,9	4,65	15	25	
M5	0,80	70	6,0	4,9	4,65	15	25	4
M6	1,00	80	6,0	4,9	5,60	17	30	
M6	1,00	80	6,0	4,9	5,60	17	30	4
M8	1,25	90	8,0	6,2	7,45	20	35	
M8	1,25	90	8,0	6,2	7,45	20	35	5
M10	1,50	100	10,0	8,0	9,35	22	39	
M10	1,50	100	10,0	8,0	9,35	22	39	5



DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12	1,75	110	9	7,0	11,25	24	
M12	1,75	110	9	7,0	11,25	24	5
M16	2,00	110	12	9,0	15,10	27	
M16	2,00	110	12	9,0	15,10	27	6
M18	2,50	125	14	11,0	16,80	30	6
M20	2,50	140	16	12,0	18,80	32	6
M24	3,00	160	18	14,5	22,60	34	6

P	18	18	18	18
M	10	10	10	10
K	10		10	
N	22	18	22	18
S				
H				
O				

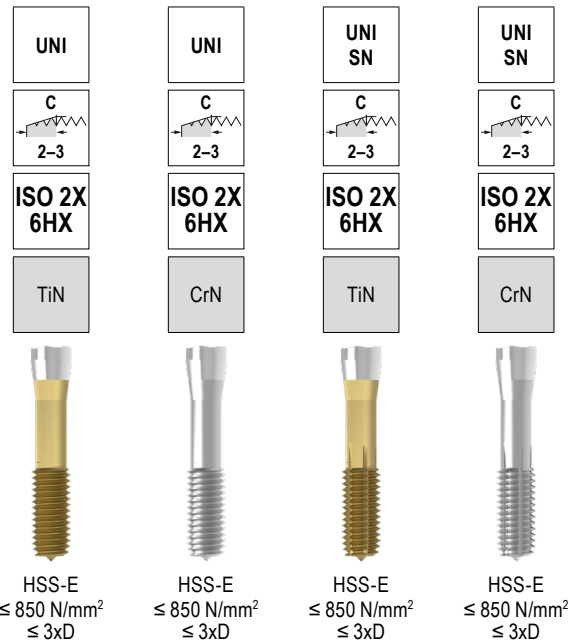Cutting speed v_c (m/min.)


23 810 ...	23 812 ...	23 814 ...	23 816 ...
020	020	020	020
025	025	025	025
030	030	030	030
040	040	040	040
050	050	050	050
060	060	060	060
080	080	080	080
100	100	100	100

23 811 ...	23 813 ...	23 815 ...	23 817 ...
120	120	120	120
160	160	160	160
		18000	
		20000	
		24000	

Through hole – machine taps for wire thread inserts, right hand


TruTap

EG M

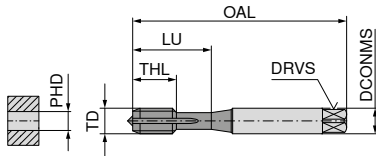

DIN 40435 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
EG-M2,5	0,45	56	3,5	2,7	2,65	11	18	3
EG-M3	0,50	63	4,5	3,4	3,15	10	21	3
EG-M4	0,70	70	6,0	4,9	4,20	12	25	3
EG-M5	0,80	80	6,0	4,9	5,25	13	30	3
EG-M6	1,00	90	8,0	6,2	6,30	17	35	3
EG-M8	1,25	100	10,0	8,0	8,40	18	39	3



DIN 40435 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
EG-M10	1,50	100	9	7,0	10,50	22	3
EG-M12	1,75	110	11	9,0	12,50	26	3
EG-M16	2,00	125	14	11,0	16,50	27	3
EG-M20	2,50	160	18	14,5	20,75	34	3

P	12
M	7
K	12
N	
S	
H	
O	

Cutting speed v_c (m/min.)

UNI

6H
modnitr. +
vap.HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 662 ...

025

030

040

050

060

080

22 663 ...

100

120


160

200

Blind hole – machine taps for wire thread inserts, right hand


CavTap

EG M

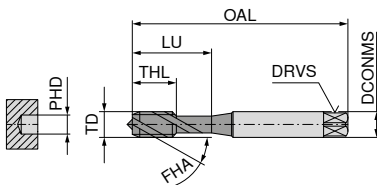

DIN 40435 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
EG-M2,5	0,45	56	3,5	2,7	2,65	5	18	2
EG-M2,5	0,45	56	3,5	2,7	2,65	5	18	3
EG-M3	0,50	63	4,5	3,4	3,15	5	21	2
EG-M3	0,50	63	4,5	3,4	3,15	5	21	3
EG-M4	0,70	70	6,0	4,9	4,20	8	25	2
EG-M4	0,70	70	6,0	4,9	4,20	8	25	3
EG-M5	0,80	80	6,0	4,9	5,25	8	30	2
EG-M5	0,80	80	6,0	4,9	5,25	8	30	3
EG-M6	1,00	90	8,0	6,2	6,30	10	35	2
EG-M6	1,00	90	8,0	6,2	6,30	10	35	3
EG-M8	1,25	100	10,0	8,0	8,40	16	39	2
EG-M8	1,25	100	10,0	8,0	8,40	16	39	3



DIN 40435 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
EG-M10	1,50	100	9	7,0	10,50	15	5
EG-M12	1,75	110	11	9,0	12,50	20	4
EG-M16	2,00	125	14	11,0	16,50	20	5
EG-M20	2,50	160	18	14,5	20,75	30	4

P	12
M	7
K	12
N	22
S	
H	
O	

Cutting speed v_c (m/min.)HSS-E
FHA 42°
≤ 500 N/mm²
≤ 3xD

22 280 ...

025


030

040

050

060

080

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 664 ...

025

030

040

050

060

080

22 665 ...

100

120


160

200


Through hole – Machine taps, right hand

TruTap

MF

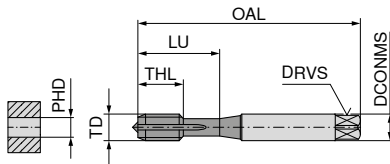

DIN 371 with reinforced shank



HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 590 ...

22 550 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M5x0,5	0,50	70	6	4,9	4,5	11	25	3
M6x0,5	0,50	80	6	4,9	5,5	13	30	3
M6x0,75	0,75	80	6	4,9	5,2	13	30	3
M8x1	1,00	90	8	6,2	7,0	17	35	3
M10x1	1,00	90	10	8,0	9,0	18	35	4

050
060
062
084
102

050
060
062
080
100

P	12	15
M	7	9
K	12	18
N		12
S		
H		
O		


Cutting speed v_c (m/min.)

DIN 374 can be found on the next page

Through hole – Machine taps, right hand

▲ TS = for high-speed machining, up to 100 m/min.

▲ LH = for left hand threads

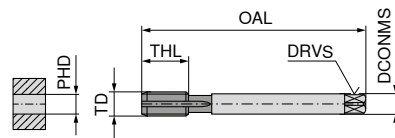

DIN 374 with reduced shank

	ST LH	ST TS	UNI	UNI	NW
					
	ISO 2 6H	ISO 2X 6HX	ISO 2 6H	ISO 2 6H	ISO 2X 6HX
		TiN	nitr. + vap.	TiN	DLC
					
	HSS-E FHA 0° ≤ 750 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 880 N/mm² ≤ 4xD
	22 210 ...	22 193 ...	22 551 ...	22 552 ...	22 466 ...
TD mm			082		
	084	080	084 100	080	08000
	102	100	102 104 120 122	100	10000 10200 12000 12200
	120			121	
	124	120	124 140	120	12400 14000 14200
	144	140	144	140	14400 16000
	162	160	162 180	160	16200
	182	180	182 184 200		
	202	200	202 222 242 244 250 260 272 280 302	200 220	
		</			

Cutting speed v_c (m/min.)


Through hole – Machine taps, right hand

MF

UNI

B
4-5ISO 2
6H

TiN



DIN 374 with reduced shank

HSS-PM
FHA 0°
≤ 1000 N/mm²
≤ 3xD


23 041 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	
M8x1	1,00	90	6	4,9	7,0	17	3	081
M10x1	1,00	90	7	5,5	9,0	18	4	102
M10x1,25	1,25	100	7	5,5	8,8	22	3	104
M12x1	1,00	100	9	7,0	11,0	18	4	120
M12x1,25	1,25	100	9	7,0	10,8	22	3	122
M12x1,5	1,50	100	9	7,0	10,5	22	3	121
M14x1,25	1,25	100	11	9,0	12,8	22	3	142
M14x1,5	1,50	100	11	9,0	12,5	22	3	144
M16x1,5	1,50	100	12	9,0	14,5	22	3	162
M18x1,5	1,50	110	14	11,0	16,5	17	4	182
M20x1,5	1,50	125	16	12,0	18,5	17	4	202
M22x1,5	1,50	125	18	14,5	20,5	25	4	222
M24x1,5	1,50	140	18	14,5	22,5	27	4	242
M24x2	2,00	140	18	14,5	22,0	27	4	244
P								15
M								9
K								18
N								12
S								
H								
O								

Cutting speed v_c (m/min.)


Through hole – Machine taps, right hand

MF

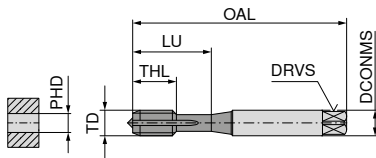

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M4x0,5	0,50	63	4,5	3,4	3,5	10	21	3
M5x0,5	0,50	70	6,0	4,9	4,5	11	25	3
M6x0,75	0,75	80	6,0	4,9	5,2	13	30	3
M6x0,5	0,50	80	6,0	4,9	5,5	13	30	3

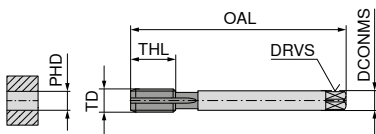

DIN 374 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M8x0,5	0,50	80	6	4,9	7,5	14	3
M8x0,75	0,75	80	6	4,9	7,2	14	3
M8x1	1,00	90	6	4,9	7,0	17	3
M8x1	1,00	90	6	4,9	7,0	17	4
M10x0,75	0,75	90	7	5,5	9,2	18	4
M10x1	1,00	90	7	5,5	9,0	18	4
M10x1,25	1,25	100	7	5,5	8,8	22	3
M12x1	1,00	100	9	7,0	11,0	18	4
M12x1,25	1,25	100	9	7,0	10,8	22	3
M12x1,5	1,50	100	9	7,0	10,5	22	3
M14x1	1,00	100	11	9,0	13,0	18	4
M14x1,5	1,50	100	11	9,0	12,5	22	3
M16x1	1,00	100	12	9,0	15,0	18	4
M16x1,5	1,50	100	12	9,0	14,5	22	3
M18x1	1,00	110	14	11,0	17,0	20	5
M18x1,5	1,50	110	14	11,0	16,5	25	4
M20x1	1,00	125	16	12,0	19,0	20	5
M20x1,5	1,50	125	16	12,0	18,5	25	4
M22x1,5	1,50	125	18	14,5	20,5	25	4
M24x1,5	1,50	140	18	14,5	22,5	27	4
M26x1,5	1,50	140	18	14,5	24,5	28	4
M28x1,5	1,50	140	20	16,0	26,5	28	5
M30x1,5	1,50	150	22	18,0	28,5	28	5

P	12	15	12	10
M	7	9		8
K	12	18	12	
N		12	12	24
S				
H				
O				


Cutting speed v_c (m/min.)

UNI	UNI	FE	VA
B 4-5	B 4-5	B 4-5	B 4-5
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
nitr. + vap.	TiN		TiN
HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 850 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 4xD
23 140 ...	23 142 ...		23 440 ...
040 050 062 060	040 050 062 060		050 062

Blind hole – Machine taps, right hand


CavTap

MF

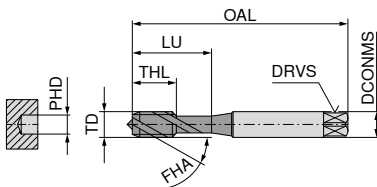

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M4x0,5	0,50	63	4,5	3,4	3,50	5	21	3
M6x0,75	0,75	80	6,0	4,9	5,25	8	30	3
M5x0,5	0,50	70	6,0	4,9	4,50	5	25	3



DIN 374 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M8x1	1,0	90	6	4,9	7,0	10	3
M10x1	1,0	90	7	5,5	9,0	10	4
M12x1,5	1,5	100	9	7,0	10,5	15	5
M14x1,5	1,5	100	11	9,0	12,5	15	5
M16x1,5	1,5	100	12	9,0	14,5	15	5
M18x1,5	1,5	110	14	11,0	16,5	17	5
M20x1,5	1,5	125	16	12,0	18,5	17	5

P	12	15	12
M	7	9	7
K	12	18	12
N		12	
S			
H			
O			

Cutting speed v_c (m/min.)

22 441 ...

040
062
050

22 555 ...

22 556 ...

22 490 ...


080
100
120
140
160080
100
120
140
160080
100
120
140
160
180
200

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck


CavTap

MF

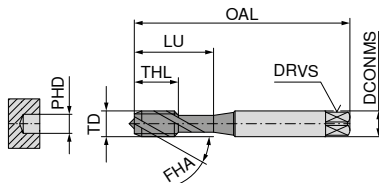

DIN 371 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M4x0,5	0,50	63	4,5	3,4	3,5	5	21	3
M5x0,5	0,50	70	6,0	4,9	4,5	5	25	3
M6x0,5	0,50	80	6,0	4,9	5,5	5	30	3
M6x0,75	0,75	80	6,0	4,9	5,2	8	30	3



DIN 374 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M6x0,75	0,75	80	4,5	3,4	5,2	8	3
M8x0,75	0,75	80	6,0	4,9	7,2	8	3
M8x1	1,00	90	6,0	4,9	7,0	10	3
M10x0,75	0,75	90	7,0	5,5	9,2	10	4
M10x1	1,00	90	7,0	5,5	9,0	10	3
M10x1,25	1,25	100	7,0	5,5	8,8	16	3
M12x1	1,00	100	9,0	7,0	11,0	11	4
M12x1,25	1,25	100	9,0	7,0	10,8	15	4
M12x1,5	1,50	100	9,0	7,0	10,5	15	4
M12x1,5	1,50	100	9,0	7,0	10,5	15	5
M14x1,5	1,50	100	11,0	9,0	12,5	15	4
M14x1,5	1,50	100	11,0	9,0	12,5	15	5
M16x1,5	1,50	100	12,0	9,0	14,5	15	4
M16x1,5	1,50	100	12,0	9,0	14,5	15	5
M18x1,5	1,50	110	14,0	11,0	16,5	17	4
M18x1,5	1,50	110	14,0	11,0	16,5	17	5
M20x1,5	1,50	125	16,0	12,0	18,5	17	4
M20x1,5	1,50	125	16,0	12,0	18,5	17	5
M22x1,5	1,50	125	18,0	14,5	20,5	17	4
M24x1,5	1,50	140	18,0	14,5	22,5	20	5
M26x1,5	1,50	140	18,0	14,5	24,5	20	5
M28x1,5	1,50	140	20,0	16,0	26,5	20	5
M30x1,5	1,50	150	22,0	18,0	28,5	22	6

P	12	15	15	15
M	7	9	9	9
K	12	18	18	18
N		12	12	12
S				
H				
O				

Cutting speed v_c (m/min.)

UNI	UNI	UNI CNC	UNI CNC
C 2-3	C 2-3	E 1,5-2	E 1,5-2
ISO 2 6H	ISO 2 6H	7G	ISO 2 6H
vap.	TiN	TiN GS	TiN GS

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xDHSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xDHSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xDHSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xD

22 202 ...

22 548 ...

22 553 ...

22 554 ...

22 563 ...


22 549 ...

Blind hole – Machine taps

▲ LH = for left hand threads

CavTap

MF

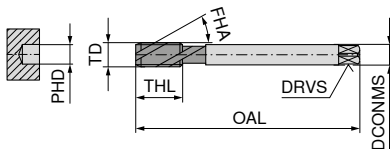ST
LHC
2-3ISO 2
6H

DIN 374 with reduced shank

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

22 601 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M8x1	1,0	90	6	4,9	7,0	10	3
M10x1	1,0	90	7	5,5	9,0	10	3
M12x1	1,0	100	9	7,0	11,0	11	4
M14x1,5	1,5	100	11	9,0	12,5	15	4
M16x1,5	1,5	100	12	9,0	14,5	15	4
M18x1,5	1,5	110	14	11,0	16,5	17	4
M20x1,5	1,5	125	16	12,0	18,5	17	4

P	12
M	
K	12
N	12
S	
H	
O	


Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap
SL

MF

ST

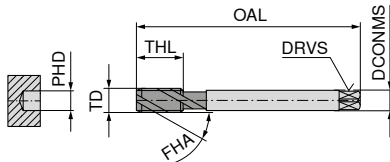ISO 2
6H

DIN 374 with reduced shank

HSS-E
FHA 15°
≤ 750 N/mm²
≤ 2xD

22 182 ...


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	
M6x0,75	0,75	80	4,5	3,4	5,2	13	3	062
M8x0,75	0,75	80	6,0	4,9	7,2	14	3	082
M8x1	1,00	90	6,0	4,9	7,0	17	3	084
M9x1	1,00	90	7,0	5,5	8,0	17	3	090
M10x0,75	0,75	90	7,0	5,5	9,2	18	3	100
M10x1	1,00	90	7,0	5,5	9,0	18	3	102
M10x1,25	1,25	100	7,0	5,5	8,8	22	3	104
M11x1	1,00	90	8,0	6,2	10,0	18	3	110
M12x1	1,00	100	9,0	7,0	11,0	18	3	120
M12x1,25	1,25	100	9,0	7,0	10,8	22	3	122
M12x1,5	1,50	100	9,0	7,0	10,5	22	3	124
M14x1	1,00	100	11,0	9,0	13,0	18	4	140
M14x1,5	1,50	100	11,0	9,0	12,5	22	3	144
M15x1	1,00	100	12,0	9,0	14,0	18	4	150
M16x1	1,00	100	12,0	9,0	15,0	18	4	160
M16x1,5	1,50	100	12,0	9,0	14,5	22	3	162
M18x1	1,00	110	14,0	11,0	17,0	20	4	180
M18x1,5	1,50	110	14,0	11,0	16,5	25	4	182
M18x2	2,00	125	14,0	11,0	16,0	26	3	184
M20x1	1,00	125	16,0	12,0	19,0	20	4	200
M20x1,5	1,50	125	16,0	12,0	18,5	25	4	202
M20x2	2,00	140	16,0	12,0	18,0	27	3	204
M22x1	1,00	125	18,0	14,5	21,0	20	4	220
M22x1,5	1,50	125	18,0	14,5	20,5	25	4	222
M22x2	2,00	140	18,0	14,5	20,0	27	4	224
M24x1	1,00	140	18,0	14,5	23,0	20	5	240
M24x1,5	1,50	140	18,0	14,5	22,5	27	4	242
M24x2	2,00	140	18,0	14,5	22,0	27	4	244
M25x1,5	1,50	140	18,0	14,5	23,5	28	4	252
M27x1,5	1,50	140	20,0	16,0	25,5	28	4	270
M27x2	2,00	140	20,0	16,0	25,0	28	4	272
M28x2	2,00	140	20,0	16,0	26,0	28	4	282
M30x1,5	1,50	150	22,0	18,0	28,5	28	5	302
M30x2	2,00	150	22,0	18,0	28,0	28	4	304
M32x1,5	1,50	150	22,0	18,0	30,5	28	6	320
M33x2	2,00	160	25,0	20,0	31,0	30	4	332
M34x1,5	1,50	170	28,0	22,0	32,5	30	6	340
M36x2	2,00	170	28,0	22,0	34,0	30	5	362
M36x3	3,00	200	28,0	22,0	33,0	42	4	364
M40x1,5	1,50	170	32,0	24,0	38,5	30	6	400
M42x2	2,00	170	32,0	24,0	40,0	30	6	422
M42x3	3,00	200	32,0	24,0	39,0	45	4	424
M45x1,5	1,50	180	36,0	29,0	43,5	32	6	450
M48x2	2,00	190	36,0	29,0	46,0	32	6	482
M48x3	3,00	225	36,0	29,0	45,0	50	5	484
P								12
M								
K								12
N								22
S								
H								
O								

Cutting speed v_c (m/min.)


Blind hole – Machine taps, right hand

CavTap

MF

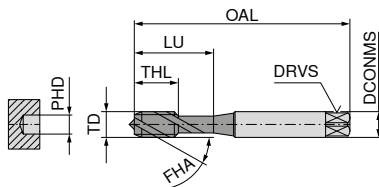


DIN 371 with reinforced shank

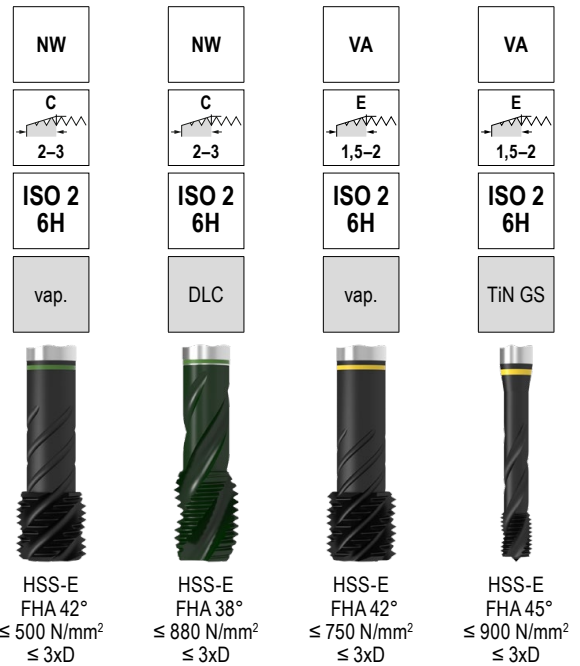

22 176 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M4x0,5	0,50	63	4,5	3,4	3,5	5	21	3
M5x0,5	0,50	70	6,0	4,9	4,5	5	25	3
M6x0,5	0,50	80	6,0	4,9	5,5	5	30	3
M6x0,75	0,75	80	6,0	4,9	5,2	8	30	3

040
050
060
062

DIN 374 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M8x0,75	0,75	80	6	4,9	7,2	8	3
M8x1	1,00	90	6	4,9	7,0	10	3
M10x1	1,00	90	7	5,5	9,0	10	3
M10x1	1,00	90	7	5,5	9,0	10	4
M10x1,25	1,25	100	7	5,5	8,8	16	3
M12x1	1,00	100	9	7,0	11,0	11	4
M12x1,25	1,25	100	9	7,0	10,8	15	4
M12x1,5	1,50	100	9	7,0	10,5	15	4
M12x1,5	1,50	100	9	7,0	10,5	15	5
M14x1	1,00	100	11	9,0	13,0	11	4
M14x1,25	1,25	100	11	9,0	12,8	15	4
M14x1,5	1,50	100	11	9,0	12,5	15	4
M14x1,5	1,50	100	11	9,0	12,5	15	5
M16x1	1,00	100	12	9,0	15,0	12	4
M16x1,5	1,50	100	12	9,0	14,5	15	4
M16x1,5	1,50	100	12	9,0	14,5	15	5
M18x1,5	1,50	110	14	11,0	16,5	17	4
M18x1,5	1,50	110	14	11,0	16,5	17	5
M20x1,5	1,50	125	16	12,0	18,5	17	4
M20x1,5	1,50	125	16	12,0	18,5	17	5
M26x1,5	1,50	140	18	14,5	24,5	20	6
M28x1,5	1,50	140	20	16,0	26,5	20	6
M30x1,5	1,50	150	22	18,0	28,5	22	6

22 188 ...

22 462 ...

22 189 ...

22 177 ...

P	15	8	10
M		6	8
K			
N	22	15	22
S			
H			
O			

Cutting speed v_c (m/min.)


Blind hole – Machine taps, right hand

MF

UNI

ISO 2
6H

TiN

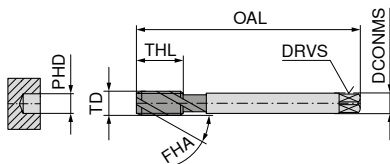

DIN 374 with reduced shank

HSS-PM
FHA 40°
≤ 1000 N/mm²
≤ 2,5xD

23 047 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M8x1	1,00	90	6	4,9	7,0	10	35	3
M10x1	1,00	90	7	5,5	9,0	10	35	4
M10x1,25	1,25	100	7	5,5	8,8	16	39	4
M12x1	1,00	100	9	7,0	11,0	11	40	4
M12x1,25	1,25	100	9	7,0	10,8	15	40	5
M12x1,5	1,50	100	9	7,0	10,5	15	40	5
M14x1	1,00	100	11	9,0	12,8	11	40	4
M14x1,5	1,50	100	11	9,0	12,5	15	40	5
M16x1,5	1,50	100	12	9,0	14,5	15	44	5
M18x1,5	1,50	110	14	11,0	16,5	17	44	5
M20x1,5	1,50	125	16	12,0	18,5	17	44	5
M22x1,5	1,50	125	18	14,5	20,5	17	44	5
M24x1,5	1,50	140	18	14,5	22,5	20	48	5
M24x2	2,00	140	18	14,5	22,0	20	48	5


P	15
M	9
K	18
N	12
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand


▲ NC = for synchronised CNC machining with minimum length compensation chuck

MF

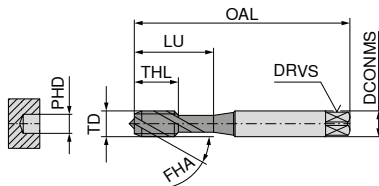

DIN 371 with reinforced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
M4x0,5	0,50	63	4,5	3,4	3,5	5	21	3
M5x0,5	0,50	70	6,0	4,9	4,5	5	25	3
M6x0,5	0,50	80	6,0	4,9	5,5	5	30	3
M6x0,75	0,75	80	6,0	4,9	5,2	8	30	3



DIN 374 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
M4x0,5	0,50	63	2,8	2,1	3,5	5	3
M5x0,5	0,50	70	3,5	2,7	4,5	5	3
M6x0,75	0,75	80	4,5	3,4	5,2	8	3
M8x0,5	0,50	80	6,0	8,0	7,5	6	3
M8x0,75	0,75	80	6,0	4,9	7,2	8	3
M8x1	1,00	90	6,0	4,9	7,0	10	3
M10x0,75	0,75	90	7,0	5,5	9,2	10	4
M10x1	1,00	90	7,0	5,5	9,0	10	3
M10x1	1,00	90	7,0	5,5	9,0	10	4
M10x1,25	1,25	100	7,0	5,5	8,8	16	3
M12x1	1,00	100	9,0	7,0	11,0	11	4
M12x1,25	1,25	100	9,0	7,0	10,8	15	4
M12x1,5	1,50	100	9,0	7,0	10,5	15	4
M12x1,5	1,50	100	9,0	7,0	10,5	15	5
M14x1	1,00	100	11,0	9,0	13,0	11	4
M14x1,5	1,50	100	11,0	9,0	12,5	15	4
M14x1,5	1,50	100	11,0	9,0	12,5	15	5
M16x1	1,00	100	12,0	9,0	15,0	12	4
M16x1,5	1,50	100	12,0	9,0	14,5	15	4
M16x1,5	1,50	100	12,0	9,0	14,5	15	5
M18x1,5	1,50	110	14,0	11,0	16,5	17	4
M18x1,5	1,50	110	14,0	11,0	16,5	17	5
M20x1,5	1,50	125	16,0	12,0	18,5	17	4
M20x1,5	1,50	125	16,0	12,0	18,5	17	5
M22x1,5	1,50	125	18,0	14,5	20,5	17	4
M24x1,5	1,50	140	18,0	14,5	22,5	20	5


P	12	15	12	15
M		9	7	9
K	12	18	12	18
N	22	12		12
S				
H				
O				

Cutting speed v_c (m/min.)

FE	UNI NC	UNI	UNI
C 2-3	E 1,5-2	C 2-3	C 2-3
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	TiN GS	vap.	TiN
HSS-E FHA 35° ≤ 850 N/mm² ≤ 2,5xD	HSS-E FHA 45° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD
		23 144 ...	23 146 ...
		040 050 060 062	040 050 060 062


Blind hole – Machine taps, right hand

MF

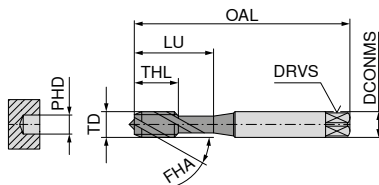

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M5x0,5	0,50	70	6	4,9	4,5	5	25	3
M6x0,75	0,75	80	6	4,9	5,2	8	30	3



DIN 374 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M8x0,75	0,75	80	6	4,9	7,2	8	3
M8x1	1,00	90	6	4,9	7,0	10	3
M10x1	1,00	90	7	5,5	9,0	10	4
M12x1	1,00	100	9	7,0	11,0	11	4
M12x1,5	1,50	100	9	7,0	10,5	15	5
M14x1,5	1,50	100	11	9,0	12,5	15	5
M16x1,5	1,50	100	12	9,0	14,5	15	5

P	10
M	8
K	
N	24
S	
H	
O	

Cutting speed v_c (m/min.)

VA

ISO 2
6H

TiN

HSS-E
FHA 45°
≤ 1200 N/mm²
≤ 3xD

23 442 ...

050

062

23 443 ...

082

084

102

120

124


144

162

Through hole / Blind hole – Machine taps, right hand

DuoTap

MF

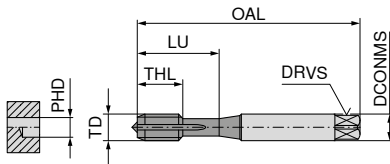

DIN 371 with reinforced shank

ST	HR	HT
ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX
	nit.	OSM

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xDHSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xDSolid carbide
FHA 0°
≤ 63 HRC
≤ 1,5xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M4x0,5	0,50	63	4,5	3,4	3,5	10	21	3
M5x0,5	0,50	70	6,0	4,9	4,5	11	25	3
M6x0,5	0,50	80	6,0	4,9	5,5	13	30	3
M6x0,75	0,75	80	6,0	4,9	5,2	13	30	3
M8x1	1,00	90	8,0	6,2	7,0	17	35	3
M8x1	1,00	90	8,0	6,2	7,1	15	35	5
M10x1	1,00	90	10,0	8,0	9,0	18	35	4
M10x1	1,00	100	10,0	8,0	9,1	18	38	5
M12x1,5	1,50	110	12,0	9,0	10,6	21	41	5
M14x1,5	1,50	110	14,0	11,0	12,6	24	44	6
M16x1,5	1,50	110	16,0	12,0	14,6	24	44	6

22 144 ...

040
050
060
062
084

104

22 146 ...

040
050
060
062

22 817 ...

080

100

120

140

160

P	12	6
M		
K	12	16
N	22	22
S		
H		2
O		


Cutting speed v_c (m/min.)

DIN 374 can be found on the next page


Through hole / Blind hole – Machine taps, right hand

DuoTap

MF



DIN 374 with reduced shank

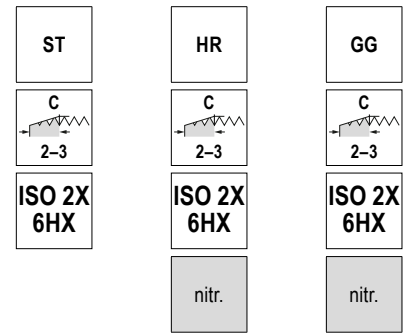HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xDHSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xDHSS-E
FHA 0°
≤ 1050 N/mm²
≤ 2xD

22 171 ...

22 209 ...

22 173 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M4x0,5	0,50	63	2,8	2,1	3,5	10	3
M5x0,5	0,50	70	3,5	2,7	4,5	11	3
M6x0,5	0,50	80	4,5	3,4	5,5	13	3
M6x0,75	0,75	80	4,5	3,4	5,2	13	3
M8x0,75	0,75	80	6,0	4,9	7,2	14	3
M8x1	1,00	90	6,0	4,9	7,0	17	3
M10x0,75	0,75	90	7,0	5,5	9,2	18	4
M10x1	1,00	90	7,0	5,5	9,0	18	4
M10x1,25	1,25	100	7,0	5,5	8,8	22	3
M11x1	1,00	90	8,0	6,2	10,0	18	4
M12x1	1,00	100	9,0	7,0	11,0	18	4
M12x1,25	1,25	100	9,0	7,0	10,8	22	4
M12x1,5	1,50	100	9,0	7,0	10,5	22	4
M14x1	1,00	100	11,0	9,0	13,0	18	4
M14x1,25	1,25	100	11,0	9,0	12,8	22	4
M14x1,5	1,50	100	11,0	9,0	12,5	22	4
M16x1	1,00	100	12,0	9,0	15,0	18	5
M16x1,5	1,50	100	12,0	9,0	14,5	22	4
M18x1	1,00	110	14,0	11,0	17,0	20	5
M18x1,5	1,50	110	14,0	11,0	16,5	25	4
M18x2	2,00	125	14,0	11,0	16,0	26	4
M20x1	1,00	125	16,0	12,0	19,0	20	5
M20x1,5	1,50	125	16,0	12,0	18,5	25	4
M20x2	2,00	140	16,0	12,0	18,0	27	4
M22x1	1,00	125	18,0	14,5	21,0	20	5
M22x1,5	1,50	125	18,0	14,5	20,5	25	4
M22x2	2,00	140	18,0	14,5	20,0	27	4
M24x1	1,00	140	18,0	14,5	23,0	20	6
M24x1,5	1,50	140	18,0	14,5	22,5	27	4
M24x2	2,00	140	18,0	14,5	22,0	27	4
M25x1,5	1,50	140	18,0	14,5	23,5	28	4
M26x1,5	1,50	140	18,0	14,5	24,5	28	4
M27x1,5	1,50	140	20,0	16,0	25,5	28	5
M27x2	2,00	140	20,0	16,0	25,0	28	4
M28x1,5	1,50	140	20,0	16,0	26,5	28	5
M30x1,5	1,50	150	22,0	18,0	28,5	28	5
M30x2	2,00	150	22,0	18,0	28,0	28	4

P	12	6	
M			
K	12	16	16
N	22	22	22
S			
H			
O			

Cutting speed v_c (m/min.)


Through Hole / Blind Hole – Machine taps

▲ ES = extra short

▲ LH = for left hand threads; ES = extra short

DuoTap

MF

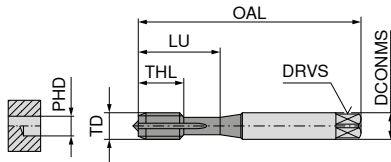

DIN 2181 with reinforced shank

ST
ESISO 2X
6HXST
LH/ESISO 2X
6HXHSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xDHSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xD

22 179 ...

22 200 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M3x0,35	0,35	40	3,5	2,7	2,65	8	18	3
M4x0,35	0,35	45	4,5	3,4	3,65	9	22	3
M4x0,5	0,50	45	4,5	3,4	3,50	9	22	3
M4,5x0,5	0,50	50	6,0	4,9	4,00	10	24	3
M5x0,5	0,50	50	6,0	4,9	4,50	11	25	3
M6x0,5	0,50	56	6,0	4,9	5,50	12	27	3
M6x0,75	0,75	56	6,0	4,9	5,20	12	27	3
M7x0,75	0,75	56	6,0	4,9	6,20	14		3
M8x0,5	0,50	56	6,0	4,9	7,50	14		4
M8x0,75	0,75	56	6,0	4,9	7,20	14		3
M8x1	1,00	63	6,0	4,9	7,00	17		3
M9x1	1,00	63	7,0	5,5	8,00	17		4
M10x0,75	0,75	63	7,0	5,5	9,20	18		4
M10x1	1,00	63	7,0	5,5	9,00	18		4
M10x1,25	1,25	70	7,0	5,5	8,80	22		3
M11x1	1,00	63	8,0	6,2	10,00	18		4
M12x1	1,00	70	9,0	7,0	11,00	18		4
M12x1,25	1,25	70	9,0	7,0	10,80	20		4
M12x1,5	1,50	70	9,0	7,0	10,50	20		4
M13x1	1,00	70	11,0	9,0	12,00	18		4
M14x1	1,00	70	11,0	9,0	13,00	18		4
M14x1,25	1,25	70	11,0	9,0	12,80	20		4
M14x1,5	1,50	70	11,0	9,0	12,50	20		4
M15x1	1,00	70	12,0	9,0	14,00	18		5
M16x1	1,00	70	12,0	9,0	15,00	18		5
M16x1,5	1,50	70	12,0	9,0	14,50	20		4
M18x1	1,00	80	14,0	11,0	17,00	18		5
M18x1,5	1,50	80	14,0	11,0	16,50	22		4
M18x2	2,00	80	14,0	11,0	16,00	22		4
M20x1,5	1,50	80	16,0	12,0	18,50	22		4
M20x2	2,00	80	16,0	12,0	18,00	22		4

P	12	12
M		
K	12	12
N	22	22
S		
H		
O		

Cutting speed v_c (m/min.)


Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

▲ HML = with soldered-in carbide strips for a higher cutting speed


DuoForm

MF

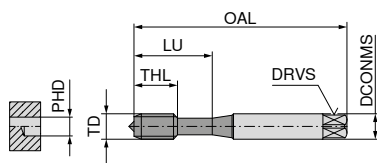

DIN 2174 with reinforced shank


TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M4x0,5	0,50	63	4,5	3,4	3,8	10	21	4
M5x0,5	0,50	70	6,0	4,9	4,8	11	25	4
M6x0,5	0,50	80	6,0	4,9	5,8	13	30	5
M6x0,75	0,75	80	6,0	4,9	5,7	13	30	4
M8x0,75	0,75	80	8,0	6,2	7,7	14	30	5
M8x1	1,00	90	8,0	6,2	7,6	17	35	5
M10x1	1,00	90	10,0	8,0	9,6	18	35	5



DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12x1	1,0	100	9	7	11,60	18	6
M12x1,5	1,5	100	9	7	11,35	13	
M12x1,5	1,5	100	9	7	11,35	22	6
M14x1,5	1,5	100	11	9	13,35	22	6
M16x1,5	1,5	100	12	9	15,35	18	
M16x1,5	1,5	100	12	9	15,35	22	6
M20x1,5	1,5	125	16	12	19,35	25	6

	22 474 ...	22 474 ...	22 197 ...
P	30	30	18
M	20	20	10
K	30	30	10
N	40	40	22
S			
H			
O			

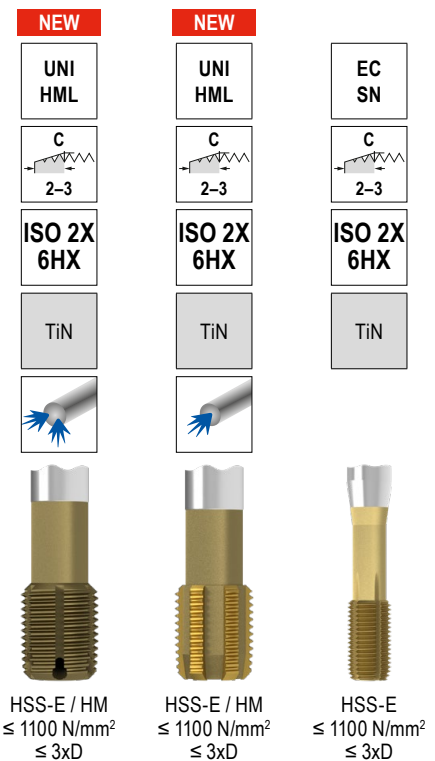Cutting speed v_c (m/min.)

22 205 ...

040
050
060
062
080
082
100

22 474 ...	22 474 ...	22 197 ...
		120
	12000	124
		140
16100	16000	160
		200


Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

MF

UNI
SNC
2-3ISO 2X
6HX

TiN

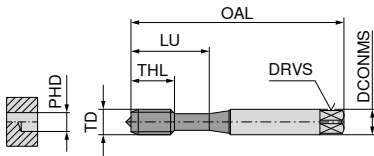


DIN 2174 with reinforced shank

HSS-E
≤ 850 N/mm²
≤ 3xD

23 842 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
M4x0,5	0,50	63	4,5	3,4	3,80	10	21	4
M5x0,5	0,50	70	6,0	4,9	4,80	11	25	4
M6x0,5	0,50	80	6,0	4,9	5,80	13	30	5
M8x1	1,00	90	8,0	6,2	7,60	17	35	5
M10x1	1,00	90	10,0	8,0	9,60	18	35	5
M10x1,25	1,25	100	10,0	8,0	9,45	18	39	5

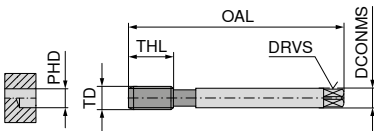040
050
060
084
102
104

DIN 2174 with reduced shank

23 843 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
M12x1,25	1,25	100	9	7	11,45	22	6
M12x1,5	1,50	100	9	7	11,35	22	6
M14x1,5	1,50	100	11	9	13,35	22	6
M16x1,5	1,50	100	12	9	15,35	22	6

122
124
144
162


P	18
M	10
K	10
N	22
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

TruTap

G

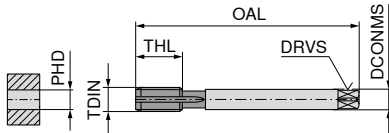

DIN 5156 with reduced shank


UNI	UNI	ST	NW	VA
ISO 228	ISO 228	ISO 228	ISO 228	ISO 228
nitr. + vap.	TiN		DLC	nitr.
HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 750 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 880 N/mm ² ≤ 4xD	HSS-E FHA 0° ≤ 900 N/mm ² ≤ 4xD

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	22 632 ...	22 630 ...	22 346 ...	22 467 ...	22 352 ...
mm	mm	mm	mm	mm	mm	mm						
1/8-28	0,907	90	7	5,5	8,80	18	3	012	012	012	01200	012
1/4-19	1,337	100	11	9,0	11,80	22	3	025	025	025	02500	025
3/8-19	1,337	100	12	9,0	15,25	22	3	037	037	037	03700	037
1/2-14	1,814	125	16	12,0	19,00	25	4	050	050	050	05000	050
3/4-14	1,814	140	20	16,0	24,50	28	4	075		075	07500	075
1-11	2,309	160	25	20,0	30,75	30	4	100		100	10000	100
P								12	15	12		8
M								7	9			6
K								12	18	12		
N									12	22	15	22
S												
H												
O												

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

G



DIN 5156 with reduced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
1/8-28	0,907	90	7	5,5	8,80	18	3
1/4-19	1,337	100	11	9,0	11,80	22	3
3/8-19	1,337	100	12	9,0	15,25	22	3
1/2-14	1,814	125	16	12,0	19,00	25	4
3/4-14	1,814	140	20	16,0	24,50	28	4
1-11	2,309	160	25	20,0	30,75	30	4

P	12	15
M	7	9
K	12	18
N		12
S		
H		
O		


Cutting speed v_c (m/min.)

UNI	UNI
B 4-5	B 4-5
ISO 228	ISO 228
nitr. + vap.	TiN
HSS-E FHA 0° $\leq 1100 \text{ N/mm}^2$ $\leq 3xD$	HSS-E FHA 0° $\leq 1100 \text{ N/mm}^2$ $\leq 3xD$
23 161 ...	23 160 ...
012	012
025	025
037	037
050	050
075	075
100	100

Blind hole – Machine taps, right hand

CavTap

G

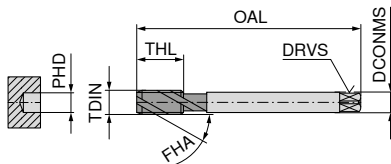

DIN 5156 with reduced shank

UNI	UNI	UNI	UNI	UNI
ISO 228	ISO 228	ISO 228	ISO 228	ISO 228 +0,05
vap.	TiN	vap.	TiN	vap.
HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	22 633 ...	22 634 ...	22 635 ...	22 636 ...	22 639 ...
1/8-28	0,907	90	7	5,5	8,80	10	3	012	012			
1/8-28	0,907	90	7	5,5	8,80	10	4			012	012	012
1/4-19	1,337	100	11	9,0	11,80	15	4	025	025			
1/4-19	1,337	100	11	9,0	11,80	15	5			025	025	025
3/8-19	1,337	100	12	9,0	15,25	15	4	037	037			
3/8-19	1,337	100	12	9,0	15,25	15	5			037	037	037
1/2-14	1,814	125	16	12,0	19,00	17	4	050	050			
1/2-14	1,814	125	16	12,0	19,00	17	5			050	050	050
5/8-14	1,814	125	18	14,5	21,00	17	4	062				
3/4-14	1,814	140	20	16,0	24,50	20	4	075				
3/4-14	1,814	140	20	16,0	24,50	20	5					075
7/8-14	1,814	150	22	18,0	28,25	22	5	087				
1-11	2,309	160	25	20,0	30,75	24	5	100				
1-11	2,309	160	25	20,0	30,75	24	6					100
1 1/4-11	2,309	170	32	24,0	39,50	25	6	125				
1 1/2-11	2,309	190	36	29,0	45,25	27	6	150				
P								12	15	12	15	12
M								7	9	7	9	7
K								12	18	12	18	12
N									12		12	
S												
H												
O												


Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

CavTap

G

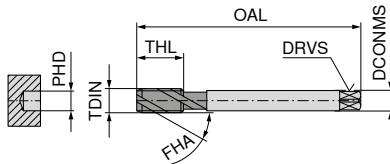

DIN 5156 with reduced shank

UNI
CNCE
1,5-2

ISO 228

TiN GS

HSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xD

22 624 ...

ST

C
2-3

ISO 228

DLC

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

22 354 ...

NW

C
2-3

ISO 228

DLC

HSS-E
FHA 36°
≤ 880 N/mm²
≤ 2,5xD

22 463 ...

VA

E
1,5-2

ISO 228

vap.

HSS-E
FHA 42°
≤ 900 N/mm²
≤ 3xD

22 355 ...

VA

E
1,5-2

ISO 228

TiN GS

HSS-E
FHA 45°
≤ 900 N/mm²
≤ 3xD


22 358 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 624 ...	22 354 ...	22 463 ...	22 355 ...	22 358 ...
1/8-28	0,907	90	7	5,5	8,80	10	3					
1/8-28	0,907	90	7	5,5	8,80	10	4	012	012		012	012
1/4-19	1,337	100	11	9,0	11,80	15	4		025			
1/4-19	1,337	100	11	9,0	11,80	15	5	025	025	02500	025	025
3/8-19	1,337	100	12	9,0	15,25	15	4		037	03700		
3/8-19	1,337	100	12	9,0	15,25	15	5	037	037	03700	037	037
1/2-14	1,814	125	16	12,0	19,00	17	4		050			
1/2-14	1,814	125	16	12,0	19,00	17	5	050	050	05000	050	050
5/8-14	1,814	125	18	14,5	21,00	17	5				062	
3/4-14	1,814	140	20	16,0	24,50	20	4		075	07500		
3/4-14	1,814	140	20	16,0	24,50	20	5				075	
1-11	2,309	160	25	20,0	30,75	24	5		100	10000		
1-11	2,309	160	25	20,0	30,75	24	6				100	
P								15	12		8	10
M								9			6	8
K								18	12			
N								12	22	15	22	22
S												
H												
O												


Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

G

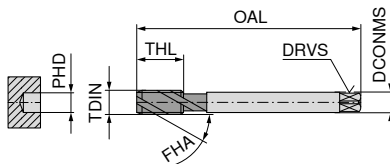

DIN 5156 with reduced shank

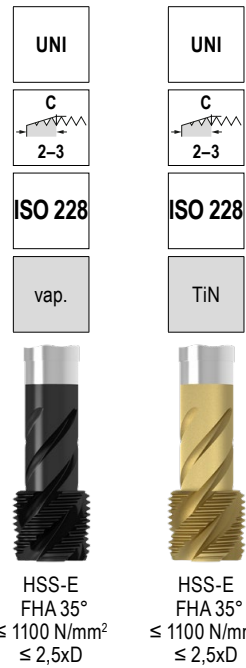

23 163 ...

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

012
025
037
050
075
100

23 162 ...

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

012
025
037
050
075
100


TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes		
1/8-28	0,907	90	7	5,5	8,80	10	3		
1/4-19	1,337	100	11	9,0	11,80	15	4		
3/8-19	1,337	100	12	9,0	15,25	15	4		
1/2-14	1,814	125	16	12,0	19,00	17	4		
3/4-14	1,814	140	20	16,0	24,50	20	4		
1-11	2,309	160	25	20,0	30,75	24	5		
P								12	15
M								7	9
K								12	18
N									12
S									
H									
O									

Cutting speed v_c (m/min.)


Through hole / Blind hole – Machine taps, right hand

DuoTap

G



DIN 5156 with reduced shank


HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xDHSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 347 ...	22 339 ...
1/16-28	0,907	90	6	4,9	6,80	17	3	006	
1/8-28	0,907	90	7	5,5	8,80	18	4	012	012
1/4-19	1,337	100	11	9,0	11,80	22	4	025	025
3/8-19	1,337	100	12	9,0	15,25	22	4	037	037
1/2-14	1,814	125	16	12,0	19,00	25	4	050	050
3/4-14	1,814	140	20	16,0	24,50	28	4	075	075
1-11	2,309	160	25	20,0	30,75	30	5	100	100
1 1/8-11	2,309	170	28	22,0	35,50	30	5	112	112
1 1/4-11	2,309	170	32	24,0	39,50	30	6	125	125
1 3/8-11	2,309	180	36	29,0	41,75	32	6	137	137
1 1/2-11	2,309	190	36	29,0	45,25	32	6	150	150
1 3/4-11	2,309	190	40	32,0	51,00	32	6	175	175
P								12	6
M									
K								12	16
N								22	22
S									
H									
O									


Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves



DIN 2189 with reduced shank

HSS-E
 $\leq 1100 \text{ N/mm}^2$
 $\leq 1,5xD$ HSS-E
 $\leq 1100 \text{ N/mm}^2$
 $\leq 3xD$

22 360 ...

22 359 ...


TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes		
1/8-28	0,907	90	7	5,5	9,25	18			
1/8-28	0,907	90	7	5,5	9,25	18	5		012
1/4-19	1,337	100	11	9,0	12,55	22			
1/4-19	1,337	100	11	9,0	12,55	22	6		012
3/8-19	1,337	100	12	9,0	16,05	22			025
3/8-19	1,337	100	12	9,0	16,05	22	6		025
1/2-14	1,814	125	16	12,0	20,10	25			037
1/2-14	1,814	125	16	12,0	20,10	25	6		037
									050
P								18	18
M								10	10
K								10	10
N								22	22
S									
H									
O									

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand


TruTap

UNC

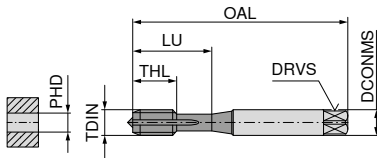

DIN 371 with reinforced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
Nr. 2-56	0,454	45	2,8	2,1	1,85	7	12	2
Nr. 4-40	0,635	56	3,5	2,7	2,35	11	18	2
Nr. 4-40	0,635	56	3,5	2,7	2,35	11	18	3
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3
Nr. 12-24	1,058	80	6,0	4,9	4,50	16	30	3
1/4-20	1,270	80	7,0	5,5	5,10	17	30	3
5/16-18	1,411	90	8,0	6,2	6,60	20	35	3
3/8-16	1,588	100	10,0	8,0	8,00	22	39	3



DIN 376 with reduced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
1/2-13	1,954	110	9	7,0	10,80	25	3
5/8-11	2,309	110	12	9,0	13,50	27	3
3/4-10	2,540	125	14	11,0	16,50	30	3
7/8-9	2,822	140	18	14,5	19,50	32	3
1-8	3,175	160	18	14,5	22,25	36	3

P	8	7	12
M	6	7	7
K			12
N	22		
S		5	
H			
O			


Cutting speed v_c (m/min.)

VA	Ti	UNI
B 4-5	B 4-5	B 4-5
2B	2BX	2B
nitr.	TiN	nitr. + vap.
HSS-E FHA 0° ≤ 900 N/mm² ≤ 4xD	HSS-PM FHA 0° ≤ 44 HRC ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
22 250 ...	22 269 ...	22 572 ...
		002
		004
006	004	006
008	008	008
010	010	010
		012
025	025	025
031	031	031
037	037	037

22 573 ...


Through hole – Machine taps, right hand

UNC

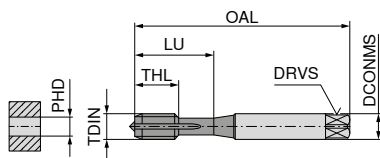

DIN 371 with reinforced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
Nr. 4-40	0,635	56	3,5	2,7	2,30	11	18	2
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3
1/4-20	1,270	80	7,0	5,5	5,20	17	30	3
5/16-18	1,411	90	8,0	6,2	6,60	20	35	3
3/8-16	1,588	100	10,0	8,0	8,00	22	39	3

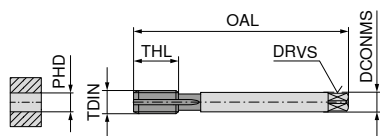

DIN 376 with reduced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
7/16-14	1,814	100	8	6,2	9,40	22	3
1/2-13	1,954	110	9	7,0	10,75	25	3
5/8-11	2,309	110	12	9,0	13,50	27	3
3/4-10	2,540	125	14	11,0	16,50	30	3

P	15	15	8
M	9		6
K	18	15	
N	12	15	22
S			
H			
O			

Cutting speed v_c (m/min.)

UNI	FE-HF	VA
B 4-5	B 4-5	B 4-5
2B	2B	2B
TiN	TiCN	nitr.
HSS-E FHA 0° $\leq 1000 \text{ N/mm}^2$ $\leq 3xD$	HSS-E FHA 0° $\leq 1100 \text{ N/mm}^2$ $\leq 3xD$	HSS-E FHA 0° $\leq 1000 \text{ N/mm}^2$ $\leq 3xD$
23 170 ...	23 370 ...	23 470 ...
004	004	004
006	006	006
008	008	008
010	010	010
025	025	025
031	031	031
037	037	037


23 171 ...

043
050
062
075

Blind hole – Machine taps, right hand


CavTap

UNC

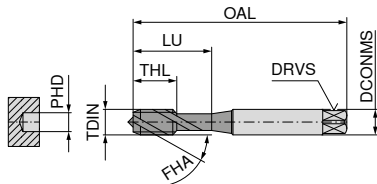

DIN 371 with reinforced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
Nr. 2-56	0,454	45	2,8	2,1	1,85	4,5	12	2
Nr. 4-40	0,635	56	3,5	2,7	2,35	6,0	18	2
Nr. 6-32	0,794	56	4,0	3,0	2,85	7,0	20	3
Nr. 8-32	0,794	63	4,5	3,4	3,50	8,0	21	3
Nr. 10-24	1,058	70	6,0	4,9	3,90	10,0	25	3
1/4-20	1,270	80	7,0	5,5	5,10	13,0	30	3
5/16-18	1,411	90	8,0	6,2	6,60	14,0	35	3
3/8-16	1,588	100	10,0	8,0	8,00	16,0	39	3



DIN 376 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
7/16-14	1,814	100	8	6,2	9,40	18	3
7/16-14	1,814	100	8	6,2	9,40	18	4
1/2-13	1,954	110	9	7,0	10,80	20	3
1/2-13	1,954	110	9	7,0	10,80	20	4
9/16-12	2,117	110	11	9,0	12,25	20	3
5/8-11	2,309	110	12	9,0	13,50	22	3
5/8-11	2,309	110	12	9,0	13,50	22	4
3/4-10	2,540	125	14	11,0	16,50	25	3
3/4-10	2,540	125	14	11,0	16,50	25	4
7/8-9	2,822	140	18	14,5	19,50	27	4
1-8	3,175	160	18	14,5	22,25	30	4
1-8	3,175	160	18	14,5	22,25	30	5

P	12	8
M	7	6
K	12	
N		22
S		
H		
O		

Cutting speed v_c (m/min.)HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xDHSS-E
FHA 42°
≤ 900 N/mm²
≤ 3xD

22 582 ...

22 266 ...

002
004
006
008
010
025
031
037006
008
010
025
031
037


22 583 ...

22 267 ...

043
050
056
062
075
087
100043
050
062
075
100


Blind hole – Machine taps, right hand

UNC

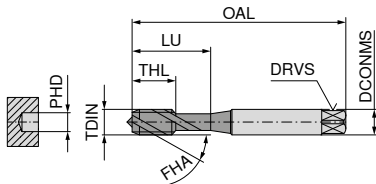

DIN 371 with reinforced shank


TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
Nr. 4-40	0,635	56	3,5	2,7	2,30	6	18	2
Nr. 4-40	0,635	56	3,5	2,7	2,30	11	18	2
Nr. 6-32	0,794	56	4,0	3,0	2,85	7	20	3
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3
Nr. 8-32	0,794	63	4,5	3,4	3,50	8	21	3
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3
Nr. 10-24	1,058	70	6,0	4,9	3,90	10	25	3
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3
1/4-20	1,270	80	7,0	5,5	5,20	13	30	3
1/4-20	1,270	80	7,0	5,5	5,20	17	30	3
5/16-18	1,411	90	8,0	6,2	6,60	14	35	3
5/16-18	1,411	90	8,0	6,2	6,60	20	35	3
3/8-16	1,588	100	10,0	8,0	8,00	16	39	3
3/8-16	1,588	100	10,0	8,0	8,00	22	39	3



DIN 376 with reduced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
7/16-14	1,814	100	8	6,2	9,40	18	3
1/2-13	1,954	110	9	7,0	10,75	20	3
5/8-11	2,309	110	12	9,0	13,50	22	3
3/4-10	2,540	125	14	11,0	16,50	25	3

P	15	15	8
M	9		6
K	18	15	
N	12	24	22
S			
H			
O			

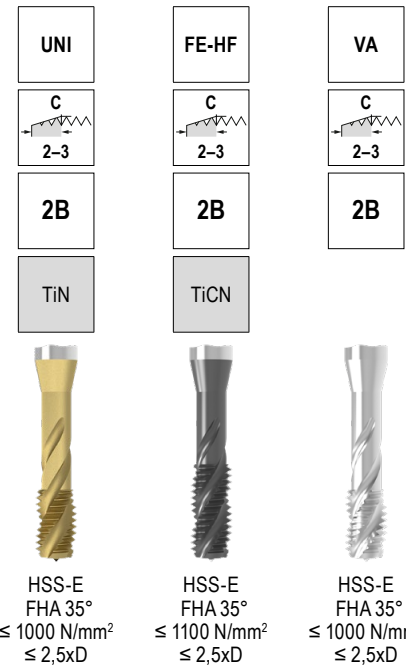Cutting speed v_c (m/min.)

23 172 ...

004

006

008

010

025

031

037

23 372 ...

004

006

008

010

025

031

037

23 472 ...

004

006

008

010

025

031

037

23 173 ...

043


050

062


075

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

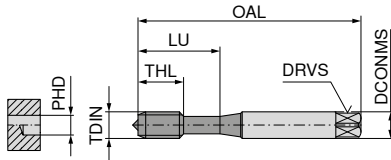

DIN 2174 with reinforced shank




22 270 ...

22 271 ...


TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes		
mm	mm	mm	mm	mm	mm	mm	mm			
Nr. 4-40	0,635	56	3,5	2,7	2,55	11	18		004	
Nr. 4-40	0,635	56	3,5	2,7	2,55	11	18	3		004
Nr. 6-32	0,794	56	4,0	3,0	3,15	12	20		006	
Nr. 6-32	0,794	56	4,0	3,0	3,15	12	20	3		006
Nr. 8-32	0,794	63	4,5	3,4	3,80	13	21		008	
Nr. 8-32	0,794	63	4,5	3,4	3,80	13	21	4		008
Nr. 10-24	1,058	70	6,0	4,9	4,35	15	25		010	
Nr. 10-24	1,058	70	6,0	4,9	4,35	15	25	4		010
1/4-20	1,270	80	7,0	5,5	5,75	17	30		025	
1/4-20	1,270	80	7,0	5,5	5,75	17	30	4		025
5/16-18	1,411	90	8,0	6,2	7,30	20	35		031	
5/16-18	1,411	90	8,0	6,2	7,30	20	35	5		031
3/8-16	1,588	100	10,0	8,0	8,80	22	39		037	
3/8-16	1,588	100	10,0	8,0	8,80	22	39	5		037
P									18	18
M									10	10
K									10	10
N									22	22
S										
H										
O										

Cutting speed v_c (m/min.)

Through hole – machine taps for wire thread inserts, right hand

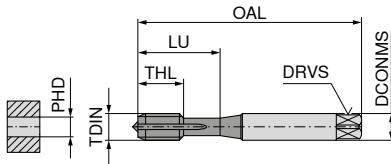

DIN 371 with reinforced shank



HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 668 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	
EG Nr. 4-40	0,635	63	4,5	3,4	3,1	13	21	3	004
EG Nr. 6-32	0,794	70	6,0	4,9	3,8	14	25	3	006
EG Nr. 8-32	0,794	80	6,0	4,9	4,4	16	30	3	008
EG Nr. 10-24	1,058	80	7,0	5,5	5,2	17	30	3	010
P									12
M									7
K									12
N									
S									
H									
O									

Cutting speed v_c (m/min.)

Blind hole – machine taps for wire thread inserts, right hand


CavTap

EG
UNC

UNI

E
1,5-22B
mod

vap.

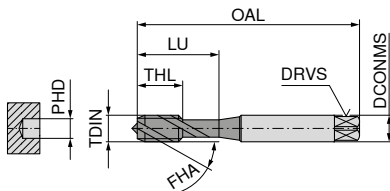

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 672 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
EG Nr. 4-40	0,635	63	4,5	3,4	3,1	7	21	3
EG Nr. 6-32	0,794	70	6,0	4,9	3,8	8	25	3
EG Nr. 8-32	0,794	80	6,0	4,9	4,4	8	30	3
EG Nr. 10-24	1,058	80	7,0	5,5	5,2	10	30	3

004

006

008

010


P	12
M	7
K	12
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap
SL

UNJC

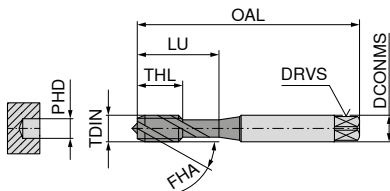

DIN 371 with reinforced shank

Ti

C

2-3

3BX

TiCN

HSS-E
FHA 15°
≤ 1200 N/mm²
≤ 2xD

22 166 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
Nr. 4-40	0,635	56	3,5	2,7	2,30	11	18	2
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3
1/4-20	1,270	80	7,0	5,5	5,25	17	30	3
3/8-16	1,588	100	10,0	8,0	8,10	22	39	3

P	7
M	7
K	
N	22
S	5
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand


TruTap

UNF

UNI

B
4-5

2B

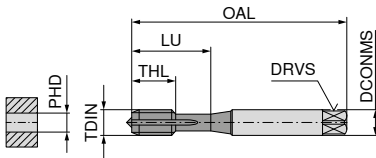
nitr. +
vap.

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 602 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
Nr. 4-48	0,529	56	3,5	2,7	2,40	11	18	2
Nr. 6-40	0,635	56	4,0	3,0	2,95	12	20	3
Nr. 8-36	0,706	63	4,5	3,4	3,50	13	21	3
Nr. 10-32	0,794	70	6,0	4,9	4,10	15	25	3
1/4-28	0,907	80	7,0	5,5	5,50	17	30	3
5/16-24	1,058	90	8,0	6,2	6,90	17	35	3

004
006
008
010
025
031

DIN 374 with reduced shank

22 603 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
7/16-20	1,270	100	8	6,2	9,90	22	3
1/2-20	1,270	100	9	7,0	11,50	22	3
9/16-18	1,411	100	11	9,0	12,90	22	3
5/8-18	1,411	100	12	9,0	14,50	22	3
3/4-16	1,588	110	14	11,0	17,50	25	4
7/8-14	1,814	125	18	14,5	20,50	25	4
1-12	2,117	140	18	14,5	23,25	28	4
1 1/8-12	2,117	150	22	18,0	26,50	28	4
1 1/4-12	2,117	150	22	18,0	29,75	28	4
1 3/8-12	2,117	170	28	22,0	33,00	30	5

043
050
056
062
075
087
100
112
125
137

P	12
M	7
K	12
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand


UNF

UNI

B
4-5

2B

TiN

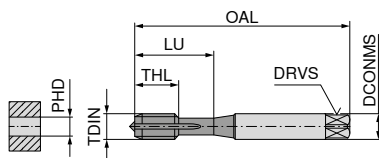

DIN 371 with reinforced shank




HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 3xD

23 180 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
Nr. 10-32	0,794	70	6	4,9	4,1	15	25	3
1/4-28	0,907	80	7	5,5	5,5	17	30	3
5/16-24	1,058	90	8	6,2	6,9	17	35	3
3/8-24	1,058	90	10	8,0	8,5	18	35	4

010
025
031
037

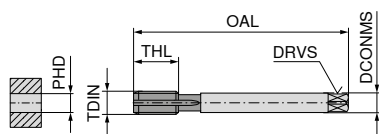

DIN 374 with reduced shank

23 181 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
7/16-20	1,270	100	8	6,2	9,9	22	3
1/2-20	1,270	100	9	7,0	11,5	22	3
9/16-18	1,411	100	11	9,0	12,9	22	3
5/8-18	1,411	100	12	9,0	14,5	22	3
3/4-16	1,588	110	14	11,0	17,5	25	4

043
050
056
062
075

P
M
K
N
S
H
O


15
9
18
12

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand


CavTap

UNF

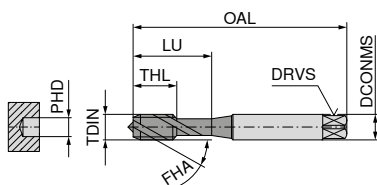

DIN 371 with reinforced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
Nr. 2-64	0,397	45	2,8	2,1	1,85	4,5	12	2
Nr. 4-48	0,529	56	3,5	2,7	2,40	6,0	18	2
Nr. 6-40	0,635	56	4,0	3,0	2,95	7,0	20	3
Nr. 6-40	0,635	56	4,0	3,0	3,00	7,0	20	3
Nr. 8-36	0,706	63	4,5	3,4	3,50	8,0	21	3
Nr. 10-32	0,794	70	6,0	4,9	4,10	10,0	25	3
Nr. 10-32	0,794	70	6,0	4,9	4,15	10,0	25	3
1/4-28	0,907	80	7,0	5,5	5,50	10,0	30	3
1/4-28	0,907	80	7,0	5,5	5,55	10,0	30	3
5/16-24	1,058	90	8,0	6,2	6,90	10,0	35	3
5/16-24	1,058	90	8,0	6,2	6,95	10,0	35	3
3/8-24	1,058	90	10,0	8,0	8,50	10,0	35	3
3/8-24	1,058	90	10,0	8,0	8,55	10,0	35	3



DIN 374 with reduced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
7/16-20	1,270	100	8	6,2	9,90	13	3
7/16-20	1,270	100	8	6,2	9,95	13	4
1/2-20	1,270	100	9	7,0	11,50	13	4
1/2-20	1,270	100	9	7,0	11,55	13	5
9/16-18	1,411	100	11	9,0	12,90	15	4
9/16-18	1,411	100	11	9,0	12,95	15	5
5/8-18	1,411	100	12	9,0	14,50	15	4
5/8-18	1,411	100	12	9,0	14,55	15	5
3/4-16	1,588	110	14	11,0	17,50	17	4
3/4-16	1,588	110	14	11,0	17,55	17	5
7/8-14	1,814	125	18	14,5	20,50	17	4
1-12	2,117	140	18	14,5	23,25	20	4
1-12	2,117	140	18	14,5	23,30	20	5
1 1/8-12	2,117	150	22	18,0	26,50	22	4
1 1/4-12	2,117	150	22	18,0	29,75	22	5
1 3/8-12	2,117	170	28	22,0	33,00	24	5

P	8	12	12
M	6	7	7
K		12	12
N	22		22
S			
H			
O			


Cutting speed v_c (m/min.)

VA	UNI	UNI
E 1,5-2	C 2-3	E 1,5-2
2B	2B	2B +0,05
vap.	vap.	vap.
HSS-E FHA 42° ≤ 900 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD
22 308 ...	22 606 ...	22 307 ...
002		
004	004	
006	006	
		006
008	008	
010	010	
		010
025	025	
		025
031	031	
		031
037		
		037


Blind hole – Machine taps, right hand

CavTap
SL

UNF

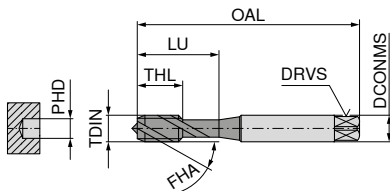

DIN 371 with reinforced shank

HSS-PM
FHA 30°
≤ 1400 N/mm²
≤ 1,5xDHSS-PM
FHA 30°
≤ 1400 N/mm²
≤ 1,5xD


TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
Nr. 10-32	0,794	70	6	4,9	4,1	10	25	3
1/4-28	0,907	80	7	5,5	5,5	10	30	3
5/16-24	1,058	90	8	6,2	6,9	10	35	3
3/8-24	1,058	90	10	8,0	8,5	10	35	3

P	5	5
M	5	5
K		
N	22	22
S	3	3
H		
O		

Cutting speed v_c (m/min.)


Blind hole – Machine taps, right hand

UNF

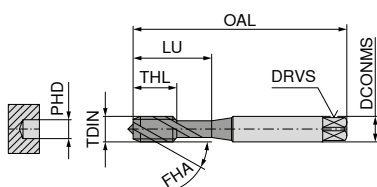

DIN 371 with reinforced shank


TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
Nr. 10-32	0,794	70	6	4,9	4,1	10	25	3
1/4-28	0,907	80	7	5,5	5,5	10	30	3
5/16-24	1,058	90	8	6,2	6,9	10	35	3
3/8-24	1,058	90	10	8,0	8,5	10	35	3



DIN 374 with reduced shank

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
7/16-20	1,270	100	8	6,2	9,9	13	3
1/2-20	1,270	100	9	7,0	11,5	13	4
9/16-18	1,411	100	11	9,0	12,9	15	4
5/8-18	1,411	100	12	9,0	14,5	15	4
3/4-16	1,588	110	14	11,0	17,5	17	4

P	15	8
M	9	6
K	18	
N	12	22
S		
H		
O		

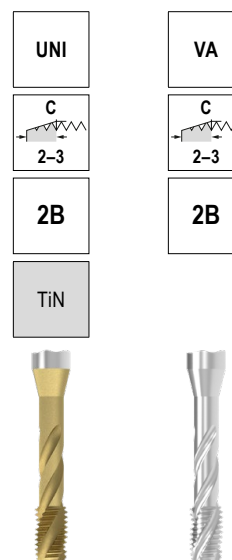Cutting speed v_c (m/min.)HSS-E
FHA 35°
 $\leq 1100 \text{ N/mm}^2$
 $\leq 2,5xD$ HSS-E
FHA 35°
 $\leq 1100 \text{ N/mm}^2$
 $\leq 2,5xD$

23 182 ...

23 482 ...

010

010

025

025

031

031

037

037

23 183 ...

23 483 ...

043

043

050

050

056

056

062

062

075

075


Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

EC
SNC
2-3

2BX

TiN

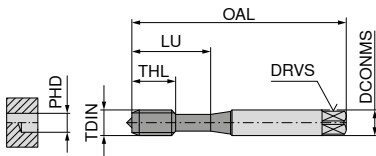


DIN 2174 with reinforced shank

HSS-E
≤ 1100 N/mm²
≤ 3xD

22 312 ...

TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes
mm	mm	mm	mm	mm	mm	mm	mm	
Nr. 4-48	0,529	56	3,5	2,7	2,62	11	18	3
Nr. 6-40	0,635	56	4,0	3,0	3,22	12	20	3
Nr. 8-36	0,706	63	4,5	3,4	3,85	13	21	4
Nr. 10-32	0,794	70	6,0	4,9	4,45	15	25	4
1/4-28	0,907	80	7,0	5,5	5,95	17	30	4

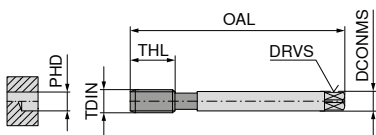004
006
008
010
025

DIN 2174 with reduced shank

22 313 ...


TDIN	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes
mm	mm	mm	mm	mm	mm	mm	
7/16-20	1,27	100	8	6,2	10,55	22	6
1/2-20	1,27	100	9	7,0	12,15	22	6

043
050

P	18
M	10
K	10
N	22
S	
H	
O	


Cutting speed v_c (m/min.)

Through hole – machine taps for wire thread inserts, right hand

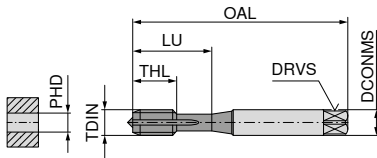

DIN 371 with reinforced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
EG Nr. 4-48	0,529	56	4	3,0	3,0	9	20	3
EG Nr. 6-40	0,635	70	6	4,9	3,7	11	25	3
EG Nr. 8-36	0,706	80	6	4,9	4,4	13	30	3
EG Nr. 10-32	0,794	80	6	4,9	5,1	13	30	3
EG 1/4-28	0,907	90	8	6,2	6,6	17	35	3



DIN 374 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes
EG 3/8-24	1,058	90	8	6,2	9,80	18	4
EG 7/16-20	1,270	100	9	7,0	11,50	22	3
EG 1/2-20	1,270	100	11	9,0	13,10	22	3
EG 5/8-18	1,411	110	14	11,0	16,25	25	4
EG 3/4-16	1,588	125	16	12,0	19,50	25	4

P	12
M	7
K	12
N	
S	
H	
O	

Cutting speed v_c (m/min.)HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 676 ...

004
006
008
010
025

22 677 ...

037
043
050
062
075

Blind hole – machine taps for wire thread inserts, right hand

CavTap


EG
UNF

UNI

E
1,5-2

2B

vap.

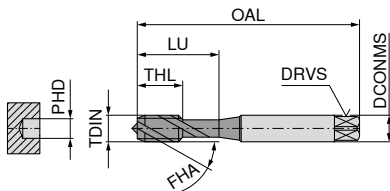

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 680 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes
EG Nr. 4-48	0,529	56	4	3,0	3,0	7	20	3
EG Nr. 6-40	0,635	70	6	4,9	3,7	8	25	3
EG Nr. 8-36	0,706	80	6	4,9	4,4	8	30	3
EG Nr. 10-32	0,794	80	6	4,9	5,1	8	30	3
EG 1/4-28	0,907	90	8	6,2	6,6	10	35	3


P	12
M	7
K	12
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand


CavTap

NPT

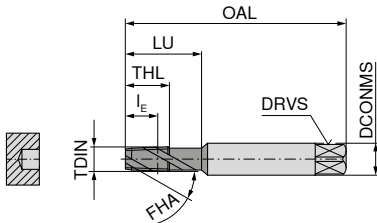

DIN 371 with reinforced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	LE mm	THL mm	LU mm	Flutes
1/16-27	0,941	90	8	6,2	9,24	13,0	26,0	3
1/8-27	0,941	90	10	8,0	9,28	13,0	26,0	3
1/8-27	0,941	90	10	8,0	9,28	12,0	26,0	4
1/4-18	1,411	100	14	11,0	13,55	19,5	34,5	3
1/4-18	1,411	100	14	11,0	13,55	18,0	34,5	4



DIN 374 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	LE mm	THL mm	Flutes
3/8-18	1,411	110	14	11	13,86	18,0	5
3/8-18	1,411	110	14	11	13,86	19,5	3
1/2-14	1,814	140	16	12	18,11	23,0	5
1/2-14	1,814	140	16	12	18,11	25,0	5
3/4-14	1,814	150	20	16	18,59	26,0	5

P	4	5
M	3	4
K		
N	22	22
S		
H		
O		

Cutting speed v_c (m/min.)

VA

C
2-3

vap.

HSS-E
FHA 35°
≤ 900 N/mm²

22 364 ...

006

012

025

VA

C
2-3

TiN

HSS-E
FHA 42°
≤ 1100 N/mm²

22 365 ...

012

025

22 371 ...

037

050

075

22 372 ...

037


050

Through hole / Blind hole – Machine taps, right hand

DuoTap

NPT

VG

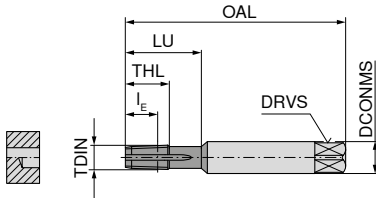

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²


22 374 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	LE mm	THL mm	LU mm	Flutes
1/16-27	0,941	90	8	6,2	9,24	13,0	26,0	3
1/8-27	0,941	90	10	8,0	9,28	13,0	26,0	3
1/4-18	1,411	100	14	11,0	13,55	19,5	34,5	3

006

012

025



DIN 374 with reduced shank

22 375 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	LE mm	THL mm	Flutes
3/8-18	1,411	110	14	11	13,86	19,5	3
1/2-14	1,814	140	16	12	18,11	25,0	5
3/4-14	1,814	150	20	16	18,59	26,0	5
1-11,5	2,209	170	25	20	22,31	30,0	5

037

050

075

100

P	4
M	
K	6
N	22
S	
H	
O	



Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

▲ ES = extra short

DuoTap

NPT

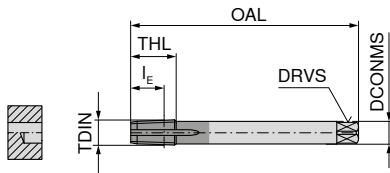ST
ESHSS-E
FHA 0°
≤ 750 N/mm²


DIN 2181 with reduced shank

22 361 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	I _E mm	THL mm	Flutes	
1/16-27	0,941	63	6	4,9	9,24	13,0	4	006
1/8-27	0,941	63	7	5,5	9,28	13,0	5	012
1/4-18	1,411	63	11	9,0	13,55	19,5	5	025
3/8-18	1,411	70	12	9,0	13,86	19,5	5	037
1/2-14	1,814	80	16	12,0	18,11	23,0	5	050
3/4-14	1,814	100	20	16,0	18,59	26,0	6	075
1-11,5	2,209	110	25	20,0	22,31	32,0	6	100
P								6
M								
K								6
N								22
S								
H								
O								

Cutting speed v_c (m/min.)

Shank extensions for taps




20 450 ...

DIN 371	DIN 374 / 376	DCONWS	a _i	LSC	BD	LS	OAL	DRVS	DCONMS	
		mm	mm	mm	mm	mm	mm	mm	mm	
M3	M4,5 - M5	3,5	2,7	23	7,5	60	130	4,9	6	020
M3,5	M5,5	4,0	3,0	23	8,4	60	130	4,9	6	030
M4	M6	4,5	3,4	23	8,4	60	130	4,9	6	040
M4,5 - M6	M8	6,0	4,9	26	12,1	60	130	5,5	7	050
M7	M9 - M10	7,0	5,5	26	12,1	60	130	5,5	7	060
M8	M11	8,0	6,2	30	13,0	60	130	6,2	8	070
M9	M12	9,0	7,0	31	15,0	60	130	7,0	9	080
M10		10,0	8,0	33	15,0	60	130	8,0	10	090
	M14	11,0	9,0	36	18,0	90	180	9,0	11	100
(M12)	M16	12,0	9,0	36	18,0	90	180	9,0	12	110

Core hole diameters for taper threads (taper 1:16)


Pre-drilling of cylindrical holes without reamer



		NPT		NPTF				Rc	
Ø D	P	Ø D ₁	t ₁ min.	Ø D ₁	t ₁ min.	Ø D	P	Ø D ₁	t ₁ min.
inch	Gg/1"	mm	mm	mm	mm	inch	Gg/1"	mm	mm
1/16	27	6,15	12	6,1	12	1/16	28	6,2	11,9
1/8	27	8,5	12	8,45	12	1/8	28	8,2	11,9
1/4	18	11	17,5	10,9	17,5	1/4	19	10,85	16,3
3/8	18	14,5	17,6	14,3	17,6	3/8	19	14,5	18,1
1/2	14	17,85	22,9	17,6	22,9	1/2	14	18	24
3/4	14	23,2	23	23	23	3/4	14	23,5	25,3
1	11½	29,5	27,4	28,75	27,4	1	11	29,5	30,6
1¼	11½	37,8	28,1	37,5	28,1				
1½	11½	44	28,4	43,75	28,4				
2	11½	56	28,4	55,75	28,4				

P = Pitch

Pre-drilling of cylindrical holes and conical boring with reamer




Taper 1:16

		NPT			NPTF		
Ø D	P	Ø D ₂	Ø D ₃	t ₁ min.	Ø D ₂	Ø D ₃	t ₁ min.
inch	Gg/1"	mm	mm	mm	mm	mm	mm
1/16	27	5,95	6,39	12	5,95	6,41	12
1/8	27	8,25	8,74	12	8,25	8,76	12
1/4	18	10,75	11,36	17,5	10,75	11,4	17,5
3/8	18	14,1	14,8	17,6	14,1	14,84	17,6
1/2	14	17,5	18,32	22,9	17,5	18,33	22,9
3/4	14	22,7	23,67	23	22,7	23,68	23
1	11½	28,6	29,69	27,4	28,6	29,72	27,4
1¼	11½	37,3	38,45	28,1	37,3	38,48	28,1
1½	11½	43,4	44,52	28,4	43,4	44,5	28,4
2	11½	55,5	56,56	28,4	55,5	56,59	28,4

		Rc		
Ø D	P	Ø D ₂	Ø D ₃	t ₁ min.
inch	Gg/1"	mm	mm	mm
1/16	28	6,1	6,56	11,9
1/8	28	8,1	8,57	11,9
1/4	19	10,75	11,45	17,7
3/8	19	14,25	14,95	18,1
1/2	14	17,75	18,63	24
3/4	14	23	24,12	25,3
1	11	29	30,29	30,6

P = Pitch

Recommendation for the pre-drilling of blind hole threads



Taper 1:16

		NPT				NPTF			
Ø D	P	Ø D ₃	b	t ₂ min.	Ø D ₄ min.	Ø D ₃	b	t ₂ min.	Ø D ₄ min.
inch	Gg/1"	mm	mm	mm	mm	mm	mm	mm	mm
1/16	27	6,39	7	10	7,6	6,41	8	11	7,4
1/8	27	8,74	7	10	10	8,76	8	11	9,8
1/4	18	11,36	10,2	14,5	13,1	11,4	11,6	15,5	12,9
3/8	18	14,8	10,6	15	16,5	14,84	12	16	16,3
1/2	14	18,32	13,8	19	20,5	18,33	15,6	20,5	20,3
3/4	14	23,67	14,2	20	25,8	23,68	16	21,5	25,6
1	11½	29,69	17	24	32,2	29,72	19,2	26	32
1¼	11½	38,45	17,5	24,5	41	38,48	19,7	26,5	40,8
1½	11½	44,52	17,5	24,5	47,2	44,5	19,7	26,5	47
2	11½	56,56	18	25	59,2	56,59	20,2	27	59

		Rc			
Ø D	P	Ø D ₃	b	t ₂ min.	Ø D ₄ min.
inch	Gg/1"	mm	mm	mm	mm
1/16	28	6,56	5,6	9,5	7,6
1/8	28	8,57	5,6	9,5	9,6
1/4	19	11,45	8,4	14	13
3/8	19	14,95	8,8	14,4	16,5
1/2	14	18,63	11,4	19	20,6
3/4	14	24,12	12,7	20,3	26
1	11	30,29	14,5	24,3	32,8

P = Pitch


Tapped hole pilot diameter

M

ISO metric coarse threads 6H to DIN 13 and DIN ISO 965-1 (M1-M1,4 = 5H)

Thread nominal Ø		Ø D ₁		Core hole
D	P	min.	max.	
M1	0,25	0,729	0,785	0,75
M1,1	0,25	0,829	0,885	0,85
M1,2	0,25	0,929	0,985	0,95
M1,4	0,3	1,075	1,142	1,1
M1,6	0,35	1,221	1,321	1,25
M1,8	0,35	1,421	1,521	1,45
M2	0,4	1,567	1,679	1,6
M2,2	0,45	1,713	1,838	1,75
M2,5	0,45	2,013	2,138	2,05
M3	0,5	2,459	2,599	2,5
M3,5	0,6	2,850	3,01	2,9
M4	0,7	3,242	3,422	3,3
M4,5	0,75	3,688	3,878	3,7
M5	0,8	4,134	4,334	4,2
M6	1	4,917	5,153	5
M7	1	5,917	6,153	6
M8	1,25	6,647	6,912	6,8
M9	1,25	7,647	7,912	7,8
M10	1,5	8,376	8,676	8,5
M11	1,5	9,376	9,676	9,5

Thread nominal Ø		Ø D ₁		Core hole
D	P	min.	max.	
M12	1,75	10,106	10,441	10,2
M14	2	11,835	12,210	12
M16	2	13,835	14,210	14
M18	2,5	15,294	15,744	15,5
M20	2,5	17,294	17,744	17,5
M22	2,5	19,294	19,744	19,5
M24	3	20,752	21,252	21
M27	3	23,752	24,252	24
M30	3,5	26,211	26,771	26,5
M33	3,5	29,211	29,771	29,5
M36	4	31,67	32,270	32
M39	4	34,67	35,270	35
M42	4,5	37,129	37,799	37,5
M45	4,5	40,129	40,799	40,5
M48	5	42,587	43,297	43
M52	5	46,587	47,297	47
M56	5,5	50,046	50,796	50,5
M60	5,5	54,046	54,796	54,5
M64	6	57,505	58,305	58
M68	6	61,505	62,305	62




6

MF

ISO metric fine threads 6H to DIN 13 and DIN ISO 965-1

Thread nominal Ø			Ø D ₁		Core hole
D	x	P	min.	max.	
M2	x	0,25	1,729	1,774	1,75
M2,2	x	0,25	1,929	1,974	1,95
M2,5	x	0,35	2,121	2,221	2,15
M3	x	0,35	2,621	2,721	2,65
M3,5	x	0,35	3,121	3,221	3,15
M4	x	0,35	3,621	3,721	3,65
M4	x	0,5	3,459	3,599	3,5
M4,5	x	0,5	3,959	4,099	4
M5	x	0,5	4,459	4,599	4,5
M6	x	0,5	5,459	5,599	5,5
M6	x	0,75	5,188	5,378	5,2
M8	x	0,75	7,188	7,378	7,2
M8	x	1,0	6,917	7,153	7
M10	x	0,75	9,188	9,378	9,2
M10	x	1,0	8,917	9,153	9
M10	x	1,25	8,647	8,912	8,8
M12	x	1,0	10,917	11,153	11
M12	x	1,5	10,376	10,676	10,5
M14	x	1,25	12,647	12,912	12,8
M16	x	1,0	14,917	15,153	15
M16	x	1,5	14,376	14,676	14,5

Thread nominal Ø			Ø D ₁		Core hole
D	x	P	min.	max.	
M20	x	1,0	18,917	19,153	19
M20	x	1,5	18,376	18,676	18,5
M20	x	2,0	17,835	18,210	18
M24	x	1,5	22,376	22,676	22,5
M30	x	2,0	27,835	28,210	28
M36	x	1,5	34,376	34,676	34,5
M36	x	3,0	32,752	33,252	33
M42	x	2,0	39,835	40,210	40
M48	x	1,5	46,376	46,676	46,5
M48	x	3,0	44,752	45,252	45
M48	x	4,0	43,67	44,270	44
M56	x	1,5	54,376	54,676	54,5
M56	x	2,0	53,835	54,210	54
M56	x	3,0	52,752	53,252	53
M56	x	4,0	51,670	52,270	52
M64	x	3,0	60,752	61,252	61
M64	x	4,0	59,670	60,270	60
M72	x	4,0	67,670	68,270	68
M80	x	6,0	73,505	74,305	74
M95	x	6,0	88,505	89,305	89
M110	x	6,0	103,505	104,305	104



Dimensions in mm; P=Pitch


Thread former pilot hole diameter

M

ISO metric coarse threads 6H to DIN 13 and DIN ISO 965-1 (M1-M1,4 = 5H)

Thread nominal Ø		Ø D ₁		Core hole
D	P	min.	max.	
M1	0,25	0,89		0,9
M1,2	0,25	1,09		1,1
M1,4	0,3	1,26		1,28
M1,6	0,35	1,45		1,47
M1,8	0,35	1,65		1,67
M2	0,4	1,83	1,86	1,85
M2,2	0,45	2	2,04	2,03
M2,5	0,45	2,3	2,34	2,33
M3	0,5	2,77	2,82	2,8
M3,5	0,6	3,23	3,28	3,25
M4	0,7	3,68	3,73	3,7
M4,5	0,75	4,15	4,21	4,2
M5	0,8	4,63	4,68	4,65

Thread nominal Ø		Ø D ₁		Core hole
D	P	min.	max.	
M6	1	5,51	5,59	5,6
M7	1	6,51	6,59	6,6
M8	1,25	7,39	7,48	7,45
M9	1,25	8,39	8,48	8,45
M10	1,5	9,25	9,35	9,35
M11	1,5	10,25	10,35	10,35
M12	1,75	11,12	11,25	11,25
M14	2	13	13,15	13,1
M16	2	15	15,15	15,1
M18	2,5	16,72	16,9	16,85
M20	2,5	18,72	18,9	18,85
M22	2,5	20,72	20,9	20,85
M24	3	22,46	22,7	22,65




MF

ISO metric fine threads 6H to DIN 13 and DIN ISO 965-1


Thread nominal Ø			Ø D ₁		Core hole
D	x	P	min.	max.	
M2	x	0,25	1,89		1,9
M2,2	x	0,25	2,09		2,1
M2,5	x	0,25	2,39		2,4
M2,5	x	0,35	2,35		2,37
M3	x	0,25	2,89		2,9
M3	x	0,35	2,85		2,88
M3,5	x	0,35	3,35		3,38
M3,5	x	0,5	3,27	3,32	3,3
M4	x	0,35	3,85		3,88
M4	x	0,5	3,77	3,82	3,8
M4,5	x	0,5	4,27	4,32	4,3
M5	x	0,5	4,77	4,82	4,8
M5	x	0,75	4,65	4,71	4,7
M5,5	x	0,5	5,27	5,32	5,3
M6	x	0,5	5,78	5,83	5,8
M6	x	0,75	5,65	5,71	5,7
M7	x	0,5	6,78	6,83	6,8
M7	x	0,75	6,65	6,71	6,7
M8	x	0,5	7,78	7,83	7,8
M8	x	0,75	7,65	7,71	7,7
M8	x	1,0	7,51	7,59	7,6
M9	x	0,5	8,78	8,83	8,8
M9	x	0,75	8,65	8,71	8,7
M9	x	1,0	8,51	8,59	8,6
M10	x	0,5	9,78	9,83	9,8
M10	x	0,75	9,65	9,71	9,7
M10	x	1,0	9,51	9,59	9,6
M10	x	1,25	9,39	9,48	9,45
M11	x	0,75	10,65	10,71	10,7
M11	x	1,0	10,51	10,59	10,6
M12	x	0,75	11,66	11,72	11,7

Thread nominal Ø			Ø D ₁		Core hole
D	x	P	min.	max.	
M12	x	1,0	11,52	11,6	11,6
M12	x	1,25	11,4	11,49	11,45
M12	x	1,5	11,26	11,36	11,35
M13	x	0,75	12,66	12,72	12,7
M13	x	1,0	12,52	12,6	12,6
M13	x	1,5	12,26	12,36	12,35
M14	x	0,75	13,66	13,72	13,7
M14	x	1,0	13,52	13,6	13,6
M14	x	1,25	13,4	13,49	13,45
M14	x	1,5	13,26	13,36	13,35
M15	x	0,75	14,66	14,72	14,7
M15	x	1,0	14,52	14,6	14,6
M15	x	1,5	14,26	14,36	14,35
M16	x	0,75	15,66	15,72	15,7
M16	x	1,0	15,52	15,6	15,6
M16	x	1,5	15,26	15,36	15,35
M18	x	1,0	17,52	17,6	17,6
M18	x	1,5	17,26	17,36	17,35
M18	x	2,0	17	17,15	17,1
M20	x	1,0	19,52	19,6	19,6
M20	x	1,5	19,26	19,36	19,35
M20	x	2,0	19	19,15	19,1
M22	x	1,5	21,26	21,36	21,35
M22	x	2,0	21	21,15	21,1
M24	x	1,5	23,26	23,38	23,35
M24	x	2,0	23,01	23,16	23,1
M25	x	1,5	24,26	24,38	24,35
M26	x	1,5	25,26	25,38	25,35
M27	x	2,0	26,01	26,16	26,1
M28	x	1,5	27,26	27,38	27,35
M30	x	1,5	29,26	29,38	29,35
M30	x	2,0	29,01	29,16	29,1



Dimensions in mm; P=Pitch


Thread tolerances and recommended manufacturing tolerances

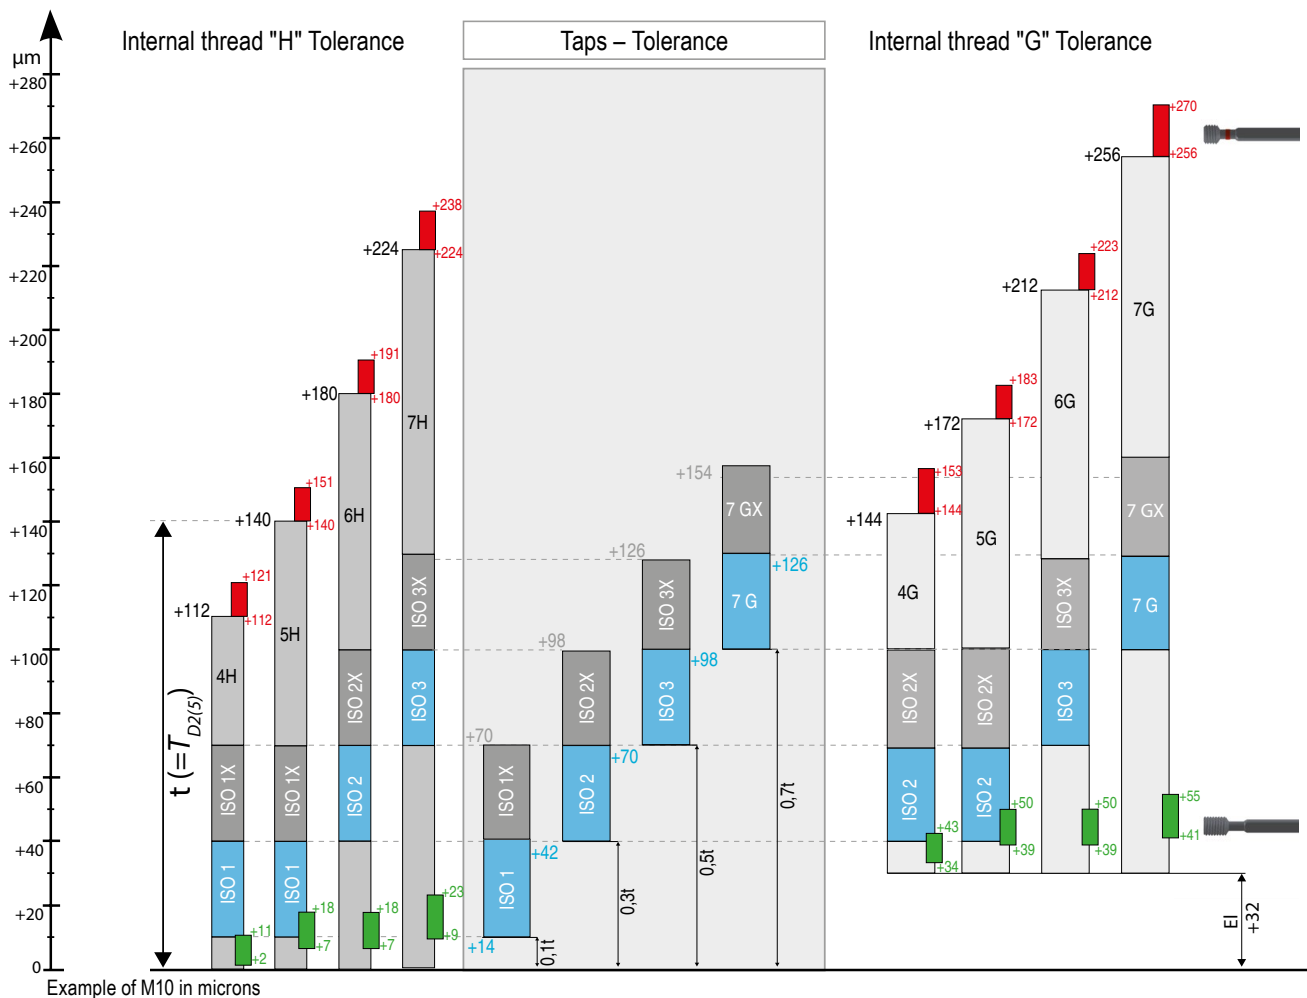

Workpieces to be plated require oversize taps.
The interference depends on the coating thickness and the flank angle.

at

60° Flank angle	Oversize = 4 x coating thickness
55° Flank angle	Oversize = 4.331 x coating thickness
30° Flank angle	Oversize = 7.727 x coating thickness

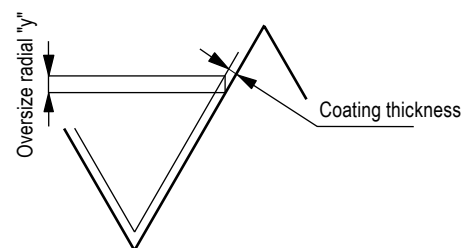

Application class of the tap Designation according to		Tolerance class of the internal thread to be cut					
DIN	ISO						
4H	ISO1	4H	5H	—	—	—	
6H	ISO2	4G	5G	6H	—	—	
6G	ISO3	—	(4E)	6G	7H	8H	
7G	—	—	—	(6E)	7G	8G	




For special applications, e.g. abrasive cast iron materials or plastics other dimensions have to be chosen which are determined on previous experience. In such cases an „X“ is added to the short designation of the tolerance, e.g. ISO 2X, however the tolerance zone assignment may be limited (6HX for tolerance zone 6H and 5G). In addition it should be taken into account that the dimensions of the internal thread do not only depend on the dimensions of the tap but on the material to be machined and all production conditions.

For first taps and intermediate taps no thread dimensions are determined.

Thread formers

DuoForm thread forming taps for cold-formable materials up to 1400 N/mm² or at least 5 % elongation. The thread is produced by plastic deformation. The molded thread has very high strength.

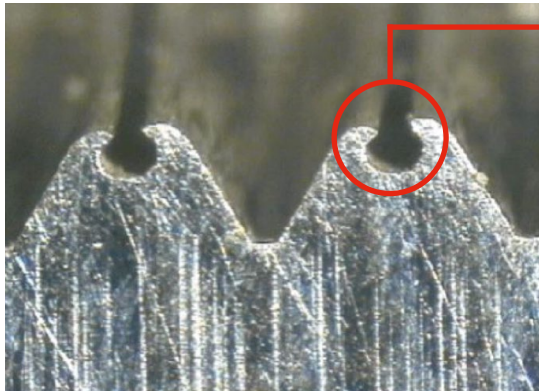

» Important

Prior to forming a thread, you should ensure that a molded thread is acceptable. In certain sectors, the forming of a thread is **not** permitted. Dirt or bacteria can settle in the formed crown.

Incremental pressure forming



← Workpiece


← Thread formers




The thread profile is pressed gradually into the material via the start (leading edge) of the tap.

Properties


- ▲ One type can be used in different materials
- ▲ For through and blind holes
- ▲ Very good thread surface quality
- ▲ High static and dynamic strength thread
- ▲ Secure machining of deep and counterbored threads
- ▲ Short machining times
- ▲ No chip problems
- ▲ No swarf
- ▲ High process security
- ▲ HSS-E and HSS-PM taps for materials up to 33 HRC with a minimum elongation of 5 %

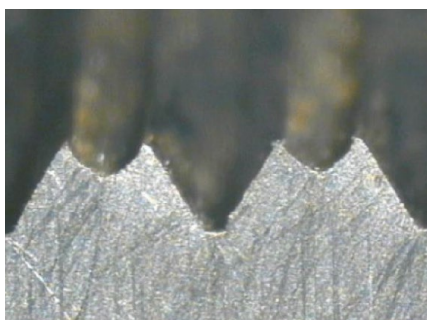

Underformed – core hole too large

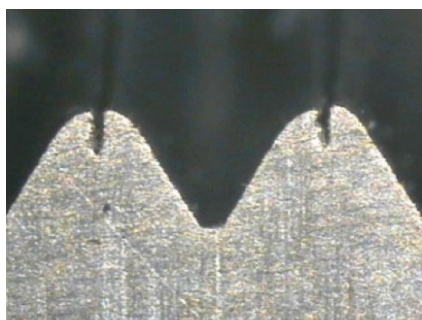

Overformed – core hole too small

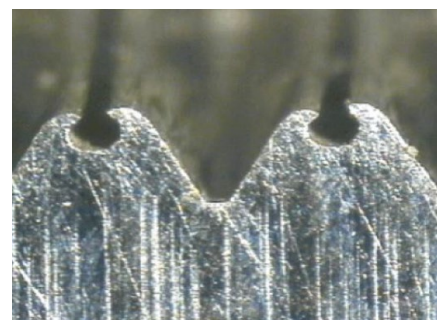

Perfect form – Core hole correct

Troubleshooting

Poor tool life

Cause

- ▲ Overload fractures of the cutting edge on the lead
- ▲ Hardness or tool material not suitable for the application
- ▲ Core hole too small, or work hardened
- ▲ Insufficient lubrication or incorrect application parameters

Remedy

- ▲ A longer lead or more flutes for the same lead length, giving a greater number of cutting teeth
- ▲ In reground tools the hardness can be reduced, apply correct parameters for regrinding
- ▲ Increase frequency of changes or regrinding of the drill
- ▲ Use the correct operating parameters for drilling
- ▲ Select the correct lubricant and ensure adequate supply

Axial thread error

Cause

- ▲ Selected geometry is not suitable
- ▲ Spindle speed is wrong compared with feed (synchronisation error)
- ▲ Blind hole taps are used with high feed pressure
- ▲ Through hole taps are used with low feed pressure

Remedy

- ▲ Check programming and pitch control or machine synchronisation
- ▲ Use tapping chuck with length compensation
- ▲ Increase retraction feed pressure
- ▲ Increase feed pressure

Oversize thread

Cause

- ▲ Thread tolerances of tool and thread gauge do not match
- ▲ Burred tool edges after regrinding
- ▲ Cold pressure welding

Remedy

- ▲ Check the correct tolerances for tool and thread gauge
- ▲ Carefully deburr
- ▲ Use appropriate (positive) geometry
- ▲ Reduce cutting speed
- ▲ Use different surface treatment or coating
- ▲ Use tapping chuck with length compensation
- ▲ Use appropriate lubricant

Broken tool

Cause

- ▲ Tool is worn
- ▲ Tool has hit the bottom of the hole
- ▲ Weld deposits
- ▲ Core hole too small
- ▲ Chip trapping
- ▲ Incorrect cutting speed
- ▲ Chip trapping in the flute
- ▲ Insufficient cooling / lubrication

Remedy

- ▲ Employ set taps
- ▲ Use a tool with lower helix
- ▲ Use tools with a shorter / longer lead
- ▲ Check the pre-drilling depth and the thread depth
- ▲ Drill core hole deeper
- ▲ Correct cutting speed
- ▲ Use a different coating or surface treatment
- ▲ Use tool holder with length compensation
- ▲ Use suitable lubricant
- ▲ Use correct core hole
- ▲ Change geometry and / or flute type
- ▲ Note chip shape and chip formation

Coatings

vap.

- ▲ Vaporised
- ▲ Vaporisation (vapour-deposition) prevents cold welds from forming on the tool and increases the surface hardness and thus the wear resistance

nitr.

- ▲ Nitrided
- ▲ Nitriding increases wear resistance and offers low friction properties

vap.
+
nitr.

- ▲ Vaporized + Nitrated
- ▲ Combination of increased surface hardness and lubricant carrier

TiN

- ▲ TiN coating
- ▲ Maximum application temperature: 450 °C

TiN
GS

- ▲ Titanium nitride low friction layer
- ▲ High wear resistance with low friction properties
- ▲ Maximum application temperature: 450 °C

TiCN

- ▲ TiCN multilayer coating
- ▲ Maximum application temperature: 450 °C

DLC

- ▲ Diamond-like carbon coating
- ▲ Specifically for machining non-ferrous metals
- ▲ Maximum application temperature: 400 °C

Ti200

- ▲ TiN coating
- ▲ Well suited for high cutting speeds during thread forming
- ▲ Maximum application temperature: 450 °C

OSM

- ▲ Hard material layer and anti-friction layer
- ▲ For use in high-strength steels

CH

- ▲ Amorphous carbon layer
- ▲ For use in non-ferrous metals or aluminum
- ▲ Reduces the material adhesion

HCr

- ▲ Hard chromed
- ▲ For use in non-ferrous metals or aluminum
- ▲ Very low surface roughness

CrN

- ▲ Chromium-nitrogen coating
- ▲ Very wear-resistant coating
- ▲ Especially suitable for use in aluminum, but also for P, M and S materials

AlTiN-
HD

- ▲ AlTiN-based nanolayer hard material coating
- ▲ Maximum application temperature: 500 °C

