


New products for machining technicians

NEW Expansion of REAMAX TS / Monomax



- ▲ Expansion of the REAMAX TS and Monomax range with a Monomax version in two lengths (3xD and 5xD) and a REAMAX TS reaming head variant
- ▲ With coated carbide blanks – ideal for interrupted cuts: DBG-P ASG 3000
- ▲ Specially designed for through hole machining of cast iron and steel materials

Expansion REAMAX TS	→ Page 10
Expansion Monomax short	→ Page 22
Expansion Monomax long	→ Page 25


NEW Machine reamers sim. DIN 8093-A / -B



- ▲ Extremely irregular pitch
- ▲ Universal solid carbide reamer without thro' coolant

→ Page 48

NEW 90° Countersink with irregular pitch, DIN 335-C



- ▲ All sizes with 3 cutting edges and extremely irregular pitch, resulting in quiet running, excellent roundness and chatter-free countersinking giving the highest surface quality
- ▲ TiN coating and special HPC-TiN coating
- ▲ For a very long service life in almost all materials
- ▲ Greatly reduced axial and radial forces
- ▲ For DIN ISO 7721 and DIN 7991 countersunk head screws

Solid carbide version	→ Page 63
HSS version	→ Page 65

NEW Indexable insert countersink for counterbores



- ▲ Universal application and maximum service life thanks to use of tried-and-tested WOEX indexable inserts (grade: BK8425 / K10; chip breaker -01)
- ▲ For creating countersinks according to DIN 974
- ▲ With thro' coolant supply

→ Page 57+58



Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools –
EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples

Table of contents

Symbol explanation	4
Selection guide – reamers	5
Reamers Toolfinder	6+7
Contents overview – Countersinks	8
Product range – Reamers	
Solid carbide – high speed reamers	9–42
Solid carbide – Reamers	43–48
HSS – Reamers	49–56
Product range – Countersinks	57–68
Technical Information	
Cutting Data	69–95
REAMAX TS assembly and operating instructions	96+97
Problems / possible causes / solutions	98
Types of wear	99
Cutting edge geometries and surface quality	100
Tolerance classes covered with 1/100 reamer	101
Manufacturer's tolerance and coatings	102
Chip Breaker Types and Grade Overview	103

KOMET \ Performance

Premium quality tools for high performance.

The premium quality tools from the **KOMET Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

KOMET \ Standard

Quality tools for standard applications.

The quality tools of the **KOMET Standard** product line are high quality, high performance, reliable and enjoy the highest level of trust among our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Coolant supply version



central internal coolant



lateral internal coolant

Shank



Plain cylindrical shank



Morse taper



Cylindrical shank with lateral driving face „Weldon“

Applications



Through hole



Blind hole



Through hole with transverse hole/
interrupted cut




Blind hole with transverse
hole/interrupted cut

ZEFP = Number of flutes

- = Main Application
- = Extended application




Selection guide – reamers

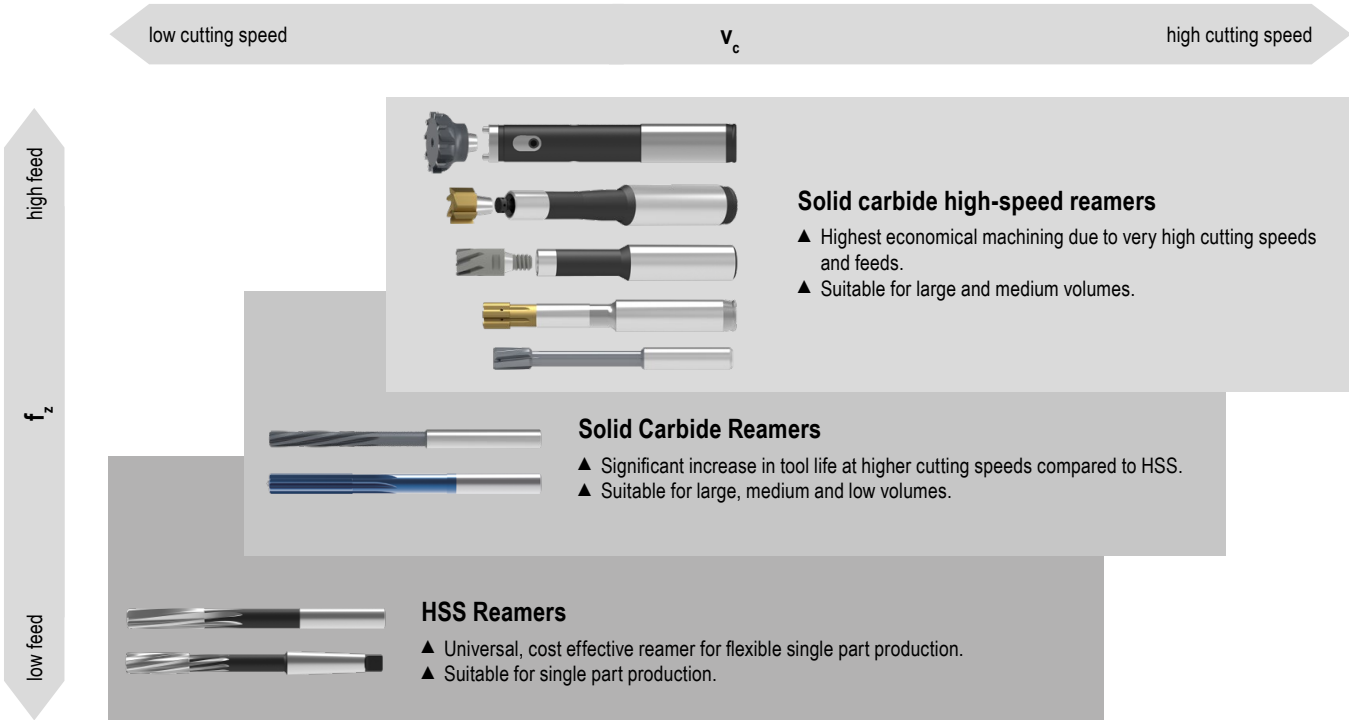

4

Overview of solid carbide high-speed reamers

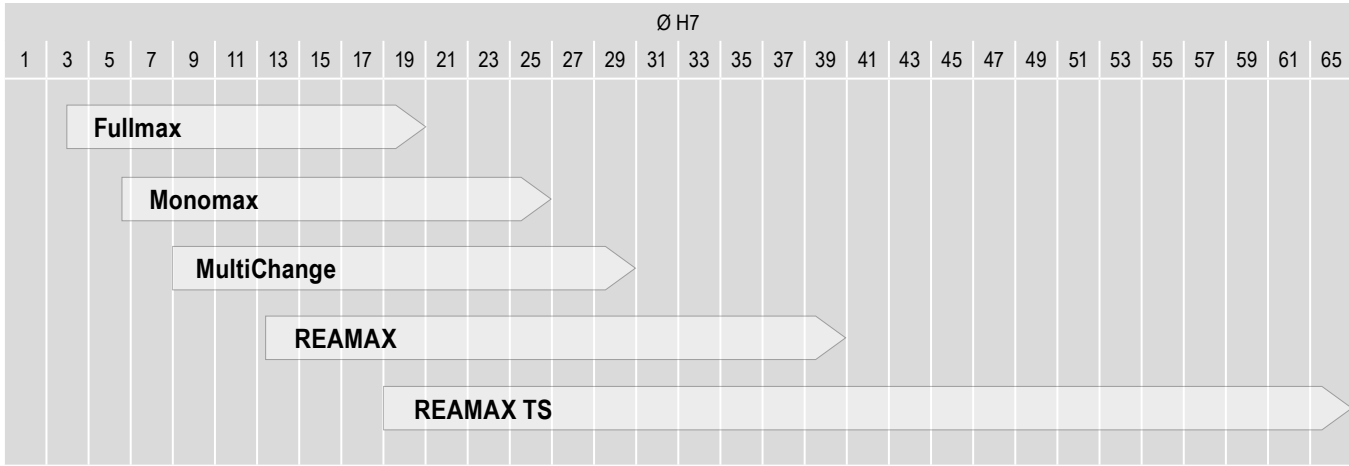

	mono	modular
fixed	Fullmax 	MultiChange  REAMAX 
adjustable	Monomax 	REAMAX TS 

Toolfinder – Reamers

Solid carbide – high speed reamers	REAMAXTS			▲ highly flexible and economical replaceable head system ▲ all common materials ▲ can be adjusted in μm range
	REAMAX			▲ holder available in 3xD and 5xD ▲ holder type DAH Zero available in 3xD and 5xD
	REMAX			▲ Exchangeable head system, optimised for use with minimum quantity lubrication (MQL) ▲ Maximum changeover precision guaranteed thanks to face and taper contact
	MultiChange			▲ holder available in 3xD and 5xD
	Monomax			▲ Flexible quick change system for reaming, countersinking and milling ▲ A high level of changeover precision guaranteed thanks to face and taper contact
	Fullmax			▲ stable holder in solid carbide and steel, from short to long
Solid carbide – Reamers	NC	NC 100		▲ adjustable monoblock reamer in 3xD and 5xD ▲ regrinding and re-tipping on the base body ▲ all common materials
	NC	NC 100H		▲ High-speed reamer in shorter and longer version ▲ Reamers for machining steel, stainless and acid-resistant steels, cast materials, aluminium and hardened materials up to 63 HRC ▲ Extremely irregular pitch ▲ Standard shank ~ DIN 6535 HA
	N			▲ universal solid carbide reamer without thro' coolant ▲ extremely irregular pitch ▲ DIN 6535 HA shank
HSS – Reamers	NC	NC 100		▲ Solid carbide reamer without thro' coolant suitable for use in hardened materials ▲ Standard shank ~ DIN 6535 HA
	N	N 100		▲ universal solid carbide reamer without thro' coolant ▲ extremely irregular pitch
	AR	AR 100		▲ HSS-E NC machine reamer ▲ DIN 1835 A shank
	N			▲ HSS-E machine reamer
	H			▲ HSS-E automatic machine reamer DIN 8089 ▲ HSS-e machine reamer DIN 208 ▲ with Morse taper ▲ HSS hand reamer with cylindrical shank DIN 206

	Hole diameter (mm) Ø DC	Standard Tolerance	Through hole	Blind hole	Int. coolant supply	Steel Stainless steel Cast iron Non-ferrous metals Heat-resistant Tempered steel Non-metal materials P M K N S H O	KOMET \ Performance	KOMET \ Standard
	18,00–65,00	H7 1/100			✓	● ● ● ● ○	9–11	
					✓		12+13	
	12,50–40,00	H7 1/100			✓	● ● ● ● ● ○	14+15	
					✓		16	
	8,00–30,20	H7 1/100			✓	● ● ● ●	17–19	
					✓		→ Catalogue – Clamping technology, Chapter 16 Accessories	
short version	5,60–25,89	H7 1/100			✓	● ● ● ● ○	20–23	
long version	5,60–25,89	H7 1/100			✓	● ● ● ● ○	24–26	
short version	4,00–16,00 2,96–20,05	H7 1/100			✓	● ● ● ○ ○ ○	27–32	
long version	4,00–16,00 2,96–20,05	H7 1/100			✓	● ● ● ● ○ ● ○	33–42	
	2,00–30,00 0,59–12,05	H7 1/100				● ○ ● ● ○ ○ ●	43–45	
	0,98–12,05	H7				○ ○ ○ ●	46+47	
	2,00–12,00	H7				● ○ ●		48
	1,50–20,00 0,95–12,00	H7 1/100				● ● ● ●	49+50	
	1,00–20,00 0,95–12,00	H7 1/100				● ○ ● ● ○ ●		51–53
	4,00–20,00 3,76–12,00	H7 1/100				● ○ ● ● ○ ●		54+55
	16,00–50,00	H7				● ○ ● ● ○ ●		56
	3,00–30,00	H7				● ○ ● ● ○ ●		56

Countersinks Overview

	Tool type	Coating	Hole diameter (mm) Ø DC	Countersinking angle SIG	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	KOMET \ Performance	KOMET \ Standard
Indexable Insert Counterbore Tool													
	WPS		10–48	180°	●	●	●	●	●	○	●	57+58	
Insert countersink 60°/90°													
	WPS		16,5–25,5	60°	●	●	●	●	●	○	●	59–61	
			19,0–37,0	90°	●	●	●	●	●	○	●		
HSS – Counterbores													
			6,0–20,0	180°	●	●	●	●	○				62
Solid Carbide Countersinks													
	N	HPC-TiN	6,3–31,0	90°	●	○	●	●	○	○	○	63	
	N		12,5–25,0	60°	●	○	●	●	○	○			64
	N		10,4–31,0	90°	●	○	●	●	○	○			64
HSS Countersinks													
	N	TiN	4,3–31,0	90°	●	○	●	●	○	○	○	65	
	N		4,3–31,0	90°	●	○	●	●	○		●		66
	N	TiN	5,0–31,0	90°	●	○	●	●	○	○	●		66
	N	TiAlN	5,0–31,0	90°	●	○	●	●	○	○	●		66
	VA	TiAlN	6,3–31,0	90°	○	●	○	○	○	○	●		66
	AL		6,3–31,0	90°	○	○	○	●	○		●		66
			6,3–25,0	60°	●	○	●	●	○		●		67
	N		30,0–80,0	90°	●	○	●	●	○		●		67
			6,3–25,0	120°	●	○	●	●	○		●		68
Deburring Countersink													
			6,3–28,0	90°	●	○	●	●	○		●		68
		TiN	6,3–28,0	90°	●	○	●	●	○	○	●		68

REAMAX TS – Selection guide

Ø 18 – 65 mm											
Article no.			40 597 ...	40 544 ...	40 577 ...	40 521 ...	40 526 ...	40 539 ...	40 585 ...	40 571 ...	40 580 ...
KOMET no.			75J.93	75J.93	75J.65	75J.65	75J.17	75H.93	75H.65	75H.65	75H.17
Cutting edge geometry			ASG4000	ASG3000	ASG3000	ASG0106	ASG0706	ASG3000	ASG3000	ASG0106	ASG0706
Lead angle			25°	45°	45°	45°	45°/8°	45°	45°	45°	45°/8°
Grade / coating			DST	DST	DBG-P	DBG-P	DBC	DST	DBG-P	DBG-P	DBC
Preferred type available			✓	✓	✓	✓	✓	✓	✓	✓	
Application			Through hole					Blind hole			
Material sub-group		Index									
P	Non alloyed steel	P.1.1	●	●	●			●	●		
		P.1.2	●	●	●			●	●		
		P.1.3	●	●	●			●	●		
		P.1.4	●	●	●			●	●		
		P.1.5	●	●	●			●	●		
	Low alloyed steel	P.2.1	●	●	●			●	●		
		P.2.2	●	●	●			●	●		
		P.2.3	●	●	●			●	●		
		P.2.4	●	●	●			●	●		
	High-alloy steel and high-alloy tool steel	P.3.1				●				●	
		P.3.2				●				●	
		P.3.3				●				●	
Stainless steel	P.4.1				●				●		
	P.4.2				●				●		
M	Stainless steel	M.1.1				●				●	
		M.2.1				●				●	
		M.3.1				●				●	
K	Grey cast iron	K.1.1			●				●		
		K.1.2			●				●		
	Spherulitic graphite cast iron	K.2.1	●	●	●			●	●		
		K.2.2	●	●	●			●	●		
	Malleable iron	K.3.1		●	●			●	●		
		K.3.2	●	●	●			●	●		
N	Aluminum alloys	N.1.1					●				●
		N.1.2					●				●
	Cast Aluminium Alloys	N.2.1					●				●
		N.2.2					●				●
		N.2.3					●				●
	Copper and copper alloys (Bronze, Brass)	N.3.1		○				○			
		N.3.2		○				○			
		N.3.3									
	Magnesium alloys	N.4.1					●				●
O	Non-metal materials	O.1.1									
		O.1.2									
		O.2.1									
		O.2.2									
		O.3.1					○				○


● = Main application

○ = Additional range of application

REAMAX TS – Replaceable reaming heads

- ▲ Up to tolerance class IT 6 with absolute process security, from the first hole
- ▲ Maximum changeover precision guaranteed
- ▲ High precision grind for maximum quality
- ▲ Can be adjusted for the smallest hole tolerances

- ▲ Interface enables head change in the machine
- ▲ Retraction from the hole at 3-4x feed rate
- ▲ KLG = Coupling size



	DST	DBG-P	DBC	NEW DBG-P	DST
	75J.93 PLGANG 25° ASG4000 CERMET Through hole	75J.65 PLGANG 45° ASG0106 HM Through hole	75J.17 PLGANG 45/8° ASG0706 HM Through hole	75J.65 PLGANG 45° ASG3000 HM Through hole	75J.93 PLGANG 45° ASG3000 CERMET Through hole
	40 597 ...	40 521 ...	40 526 ...	40 577 ...	40 544 ...
DC _{H7} mm	L mm	LPR mm	ZEFP	KLG	
18,00	6	20	6	1	
18,01 - 19,99	6	20	6	1	
20,00	6	20	6	2	
20,01 - 21,99	6	20	6	2	
22,00	6	20	6	3	
22,01 - 23,99	6	20	6	3	
24,00	6	20	6	3	
24,01 - 24,99	6	20	6	3	
25,00	6	20	6	3	
25,01 - 25,99	6	20	6	3	
26,00	6	20	6	3	
26,01 - 26,99	6	20	6	3	
27,00 - 27,99	6	25	6	4	
28,00	6	25	6	4	
28,01 - 29,99	6	25	6	4	
30,00	6	25	6	4	
30,01 - 31,79	6	25	6	4	
31,80 - 31,99	6	25	8	4	
32,00	6	25	8	4	
32,01 - 34,99	6	25	8	4	
35,00	6	25	8	5	
35,01 - 39,99	6	25	8	5	
40,00	6	25	8	5	
40,01 - 41,99	6	25	8	5	
42,00	6	30	8	6	
42,01 - 49,99	6	30	8	6	
50,00	6	30	8	6	
50,01 - 51,99	6	30	8	6	
52,00 - 53,99	8	35	10	7	
54,00	8	35	10	7	
54,01 - 65,00	8	35	10	7	
P	●	●		●	●
M		●			
K	●			●	●
N			●		○
S					
H					
O					○

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 70-72



For xxxx please indicate requested Ø in H7 in the order (e.g. Ø 24.12 H7 → article no. 40 597 2412)!

All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7)!

All heads are also available as fixed head variants (not adjustable) on request.



Assembly instructions can be found on → **Page 96+97**





Further information on chamfer geometries (ASG) can be found on → **page 100**.

REAMAX TS – Replaceable reaming heads

- ▲ Up to tolerance class IT 6 with absolute process security, from the first hole
- ▲ Maximum changeover precision guaranteed
- ▲ High precision grind for maximum quality
- ▲ Can be adjusted for the smallest hole tolerances

- ▲ Interface enables head change in the machine
- ▲ Retraction from the hole at 3-4x feed rate
- ▲ KLG = Coupling size

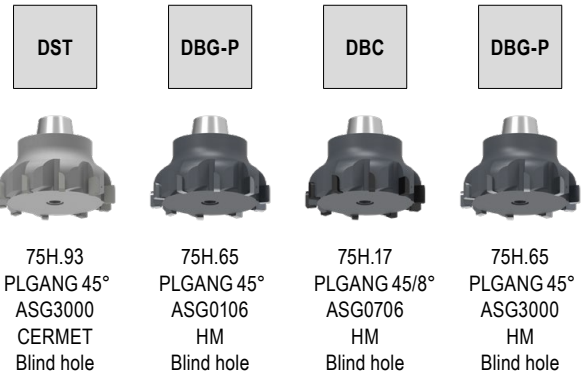

DC _{H7} mm	L mm	LPR mm	ZEFP	KLG	40 539 ...	40 571 ...	40 580 ...	40 585 ...
18,00	6	20	6	1	18000	18000	18000 ¹⁾	18000
18,01 - 19,99	6	20	6	1	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
20,00	6	20	6	2	20000	20000	20000 ¹⁾	20000
20,01 - 21,99	6	20	6	2	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
22,00	6	20	6	3	22000	22000	22000 ¹⁾	22000
22,01 - 23,99	6	20	6	3	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
24,00	6	20	6	3	24000	24000	24000 ¹⁾	24000
24,01 - 24,99	6	20	6	3	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
25,00	6	20	6	3	25000	25000	25000 ¹⁾	25000
25,01 - 25,99	6	20	6	3	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
26,00	6	20	6	3	26000	26000	26000 ¹⁾	26000
26,01 - 26,99	6	20	6	3	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
27,00 - 27,99	6	25	6	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
28,00	6	25	6	4	28000	28000	28000 ¹⁾	28000
28,01 - 29,99	6	25	6	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
30,00	6	25	6	4	30000	30000	30000 ¹⁾	30000
30,01 - 31,79	6	25	6	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
31,80 - 31,99	6	25	8	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
32,00	6	25	8	4	32000	32000	32000 ¹⁾	32000
32,01 - 34,99	6	25	8	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
35,00	6	25	8	5	35000	35000	35000 ¹⁾	35000
35,01 - 39,99	6	25	8	5	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
40,00	6	25	8	5	40000	40000	40000 ¹⁾	40000
40,01 - 41,99	6	25	8	5	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
42,00	6	30	8	6	42000	42000	42000 ¹⁾	42000
42,01 - 49,99	6	30	8	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
50,00	6	30	8	6	50000	50000	50000 ¹⁾	50000
50,01 - 51,99	6	30	8	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
52,00 - 53,99	8	35	10	7	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
54,00	8	35	10	7	54000 ¹⁾	54000 ¹⁾	54000 ¹⁾	54000 ¹⁾
54,01 - 65,00	8	35	10	7	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
P					●	●		●
M						●		
K					●			●
N					○		●	
S								
H								
O							○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 70-72

1) For xxxx please indicate requested Ø in H7 in the order (e.g. Ø 24.12 H7 → article no. 40 539 2412)!

All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7)!

All heads are also available as fixed head variants (not adjustable) on request.

1) Assembly instructions can be found on → Page 96+97


1) Further information on chamfer geometries (ASG) can be found on → page 100.

REAMAX TS – Holder

▲ KLG = Coupling Size

Scope of supply:

Complete holder incl. pull stud but without exchangeable head

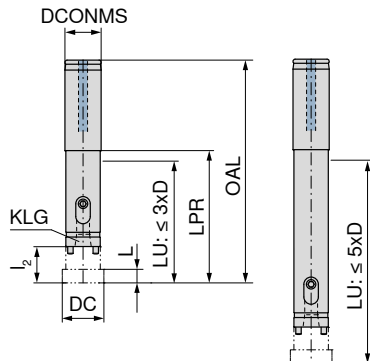

DC mm	KOMET no.	KLG	OAL mm	I ₂ mm	LPR mm	L mm	DCONMS mm	torque moment Nm	40 501 ...	40 503 ...
18,00 - 19,99	75A.40.13010	1	130	20	80	6	20	1,5	02099	
18,00 - 19,99	75A.40.15010	1	190	20	140	6	20	1,5		02099
20,00 - 21,99	75A.40.13020	2	130	20	80	6	20	2,5	02299	
20,00 - 21,99	75A.40.15020	2	190	20	140	6	20	2,5		02299
22,00 - 26,99	75A.40.13030	3	130	20	80	6	20	4	02799	
22,00 - 26,99	75A.40.15030	3	210	20	160	6	20	4		02799
27,00 - 34,99	75A.40.13040	4	176	25	120	6	25	5	03599	
27,00 - 34,99	75A.40.15040	4	236	25	180	6	25	5		03599
35,00 - 41,99	75A.40.13050	5	176	25	120	6	25	6	04299	
35,00 - 41,99	75A.40.15050	5	256	25	200	6	25	6		04299
42,00 - 51,99	75A.40.13060	6	180	30	120	6	32	10	05299	
42,00 - 51,99	75A.40.15060	6	280	30	220	6	32	10		05299
52,00 - 65,00	75A.40.13070	7	180	30	120	8	32	13	06599	
52,00 - 65,00	75A.40.15070	7	280	30	220	8	32	13		06599

Do not heat shrink tools !

Spare parts

DC	80 397 ...	80 950 ...	40 900 ...
18,00 - 19,99		T08 - IP	00100
20,00 - 21,99	SW2,5	039	00200
22,00 - 26,99	SW3		00300
27,00 - 34,99	SW3		00400
35,00 - 41,99	SW3		00500
42,00 - 51,99	SW4		00500
52,00 - 65,00	SW5		00700


Assembly instructions can be found on → **Page 96+97**

REAMAX TS – Holder

- ▲ KLG = Coupling size
- ▲ Adjustment inside the machine
- ▲ Alignable DAH Zero holder for correction of concentricity error
- ▲ DAH Zero holder is pre-loaded and set to a runout of < 0.005 mm

Scope of supply:

Complete holder incl. pull stud but without exchangeable head

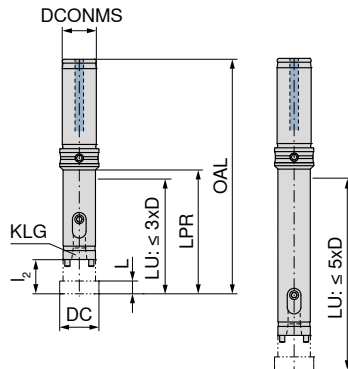

DC mm	KOMET no.	KLG	OAL mm	I ₂ mm	LPR mm	L mm	DCONMS mm	torque moment Nm	40 504 ...	40 506 ...
18,00 - 19,99	75A.41.13010	1	145	20	80	6	20	1,5	02099	
18,00 - 19,99	75A.41.15010	1	205	20	140	6	20	1,5		02099
20,00 - 21,99	75A.41.13020	2	145	20	80	6	20	2,5	02299	
20,00 - 21,99	75A.41.15020	2	205	20	140	6	20	2,5		02299
22,00 - 26,99	75A.41.13030	3	145	20	80	6	20	4	02799	
22,00 - 26,99	75A.41.15030	3	225	20	160	6	20	4		02799
27,00 - 34,99	75A.41.13040	4	176	25	120	6	25	5	03599	
27,00 - 34,99	75A.41.15040	4	236	25	180	6	25	5		03599
35,00 - 41,99	75A.41.13050	5	176	25	120	6	25	6	04299	
35,00 - 41,99	75A.41.15050	5	256	25	200	6	25	6		04299

1 Do not heat shrink tools !

Spare parts

DC	80 397 ...	80 950 ...	40 900 ...
18,00 - 19,99		T08 - IP	00100
20,00 - 21,99	SW2,5	039	00200
22,00 - 26,99	SW3		00300
27,00 - 34,99	SW3		00400
35,00 - 41,99	SW3		00500

1 Assembly instructions can be found on → **Page 96+97**

REAMAX – Selection guide


Ø 12,5 – 40 mm							
Article no.	40 536 ...		40 525 ...	40 560 ...	40 551 ...	40 570 ...	40 505 ...
KOMET no.	640.93		640.93	640.65	640.65	640.27	640.71
Cutting edge geometry	ASG4000		ASG3000	ASG3000	ASG0106	ASG0706	ASG3000
Lead angle	25°		45°	45°	45°	45°/8°	45°
Grade / coating	DST		DST	DBG-P	DBG-P	DBC	TiN
Preferred type available	✓		✓	✓	✓		✓
Application	Through hole		Through hole + blind hole				
Material sub-group	Index		 	   			
P	Non alloyed steel	P.1.1	●	●	●		○
		P.1.2	●	●	●		○
		P.1.3	●	●	●		○
		P.1.4	●	●	●		○
		P.1.5	●	●	●		○
	Low alloyed steel	P.2.1	●	●	●		○
		P.2.2	●	●	●		○
		P.2.3	●	●	●		○
		P.2.4			●	●	○
	High-alloy steel and high-alloy tool steel	P.3.1				●	
		P.3.2				●	
		P.3.3				●	
	Stainless steel	P.4.1				●	
		P.4.2				●	
M	Stainless steel	M.1.1				●	
		M.2.1				●	
		M.3.1				●	
K	Grey cast iron	K.1.1			●		○
		K.1.2			●		○
	Spherulitic graphite cast iron	K.2.1	○	●	●		
		K.2.2	○	●	●		
	Malleable iron	K.3.1		●	●		
		K.3.2	○	●	●		
N	Aluminum alloys	N.1.1				●	
		N.1.2				●	
	Cast aluminium alloys	N.2.1				●	
		N.2.2				●	
		N.2.3					
	Copper and copper alloys (Bronze, Brass)	N.3.1		○			●
		N.3.2		○			●
		N.3.3					●
	Magnesium alloys	N.4.1					
H	Hardened steel	H.1.1				●	
		H.1.2				●	
		H.1.3				●	
		H.1.4					
	Chilled iron	H.2.1				●	
	Hardened cast iron	H.3.1				●	
O	Non-metal materials	O.1.1					
		O.1.2					
		O.2.1					
		O.2.2					
		O.3.1				○	

● = Main application

○ = Additional range of application

REAMAX – Replaceable reaming heads

- ▲ Up to tolerance class IT 7 with absolute process security, from the first hole
- ▲ Maximum changeover precision guaranteed
- ▲ Maximum radial run-out accuracy thanks to precision-ground face and taper contact
- ▲ No Ø adjustment necessary



- ▲ Optimised for use with minimum quantity lubrication (MQL)
- ▲ Retraction from the hole at 3-4x feed rate
- ▲ KLG = Coupling size

DST	DBG-P	DBC	DST	DBG-P	TiN
					
640.93 PLGANG 25° ASG4000 CERMET Through hole	640.65 PLGANG 45° ASG0106 HM Through hole + blind hole	640.27 PLGANG 45/8° ASG0706 HM Through hole + blind hole	640.93 PLGANG 45° ASG3000 CERMET Through hole + blind hole	640.65 PLGANG 45° ASG3000 HM Through hole + blind hole	640.71 PLGANG 45° ASG3000 HM Through hole + blind hole
40 536 ...	40 551 ...	40 570 ...	40 525 ...	40 560 ...	40 505 ...
xxxx ¹⁾ 15000 ¹⁾ xxxx ¹⁾	xxxx ¹⁾ 15000 xxxx ¹⁾	xxxx ¹⁾ 15000 ¹⁾ xxxx ¹⁾	xxxx ¹⁾ 15000 ¹⁾ xxxx ¹⁾	xxxx ¹⁾ 15000 xxxx ¹⁾	xxxx ¹⁾ 150 xxxx ¹⁾
160 xxxx ¹⁾ 180 xxxx ¹⁾ 200 xxxx ¹⁾	16000 xxxx ¹⁾ 18000 xxxx ¹⁾ 20000 xxxx ¹⁾	16000 ¹⁾ xxxx ¹⁾ 18000 ¹⁾ xxxx ¹⁾ 20000 ¹⁾ xxxx ¹⁾	160 xxxx ¹⁾ 180 xxxx ¹⁾ 200 xxxx ¹⁾	16000 xxxx ¹⁾ 18000 xxxx ¹⁾ 20000 xxxx ¹⁾	160 xxxx ¹⁾ 180 xxxx ¹⁾ 200 xxxx ¹⁾
220 xxxx ¹⁾ 24000 ¹⁾ xxxx ¹⁾ 250 xxxx ¹⁾	22000 xxxx ¹⁾ 24000 xxxx ¹⁾ 25000 xxxx ¹⁾	22000 ¹⁾ xxxx ¹⁾ 24000 ¹⁾ xxxx ¹⁾ 25000 ¹⁾ xxxx ¹⁾	220 xxxx ¹⁾ 24000 ¹⁾ xxxx ¹⁾ 250 xxxx ¹⁾	22000 xxxx ¹⁾ 24000 xxxx ¹⁾ 25000 xxxx ¹⁾	220 xxxx ¹⁾ 240 xxxx ¹⁾ 250 xxxx ¹⁾
xxxx ¹⁾ 280 xxxx ¹⁾ 300 xxxx ¹⁾	xxxx ¹⁾ 28000 xxxx ¹⁾ 30000 xxxx ¹⁾	xxxx ¹⁾ 28000 ¹⁾ xxxx ¹⁾ 30000 ¹⁾ xxxx ¹⁾	xxxx ¹⁾ 280 xxxx ¹⁾ 300 xxxx ¹⁾	xxxx ¹⁾ 28000 xxxx ¹⁾ 30000 xxxx ¹⁾	xxxx ¹⁾ 280 xxxx ¹⁾ 300 xxxx ¹⁾
xxxx ¹⁾ 400	xxxx ¹⁾ 40000	xxxx ¹⁾ 40000 ¹⁾	xxxx ¹⁾ 400	xxxx ¹⁾ 40000	xxxx ¹⁾ 400
●	●		●	●	○
○	●				
		●	●	●	○
			○		●
	●				
			○		

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 73–75



For xxxx please indicate requested Ø in H7 in the order (e.g. Ø 15.12 H7 → article no. 40 525 1512)!

All other diameters and tolerance classes are also possible on request (e.g. 18.5 ^{+0.025} or 18 N7)!



A detailed operating manual is available for download in the online shop next to the product.




Further information on chamfer geometries (ASG) can be found on → page 100.

REAMAX – Holder

▲ KLG = Coupling Size

Scope of supply:

Complete holder, but without exchangeable head

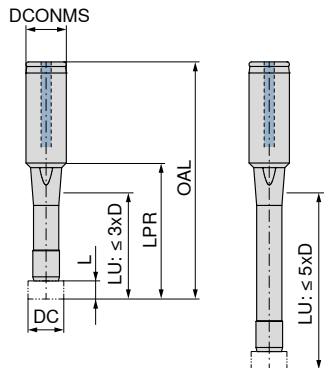

DC mm	KOMET no.	KLG	OAL mm	LPR mm	L mm	DCONMS mm	torque moment Nm	40 590 ...	40 591 ...
12,50 - 15,99	640.01.001	1	107	59	9	16	4 - 5	016 ¹⁾	016 ¹⁾
12,50 - 15,99	640.81.001	1	137	89	9	16	4 - 5		
16,00 - 21,99	640.01.002	2	119	69	9	20	6 - 7	022	022
16,00 - 21,99	640.81.002	2	169	119	9	20	6 - 7		
22,00 - 25,99	640.01.003	3	140	84	9	25	10 - 12	026	026
22,00 - 25,99	640.81.003	3	196	140	9	25	10 - 12		
26,00 - 32,00	640.01.005	4	160	104	9	25	18 - 20	032	032
26,00 - 32,00	640.81.005	4	226	170	9	25	18 - 20		
32,01 - 40,00	640.01.006	5	199	139	9	32	26 - 28	040	040
32,01 - 40,00	640.81.006	5	270	210	9	32	26 - 28		


1) This holder can also be used for reaming heads for through holes from Ø 12 mm, which are available on request

Do not heat shrink tools !

Spare parts

DC	DCONMS	40 950 ...	40 950 ...	40 950 ...	40 950 ...
12,50 - 15,99	16		101	001	301
12,50 - 15,99	16	107		001	301
16,00 - 21,99	20	108		002	302
16,00 - 21,99	20		102	002	302
22,00 - 25,99	25		103	003	303
22,00 - 25,99	25	109		003	303
26,00 - 32,00	25		104	004	303
26,00 - 32,00	25	110		004	303
32,01 - 40,00	32	112		005	304
32,01 - 40,00	32		106	005	304

Draw bolt 5xD	Draw bolt 3xD	Draw bar	Circlip
40 950 ...	40 950 ...	40 950 ...	40 950 ...

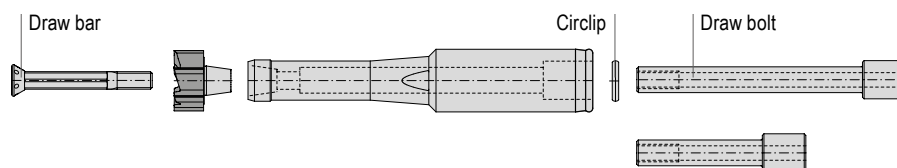

A detailed operating manual is available for download in the online shop next to the product.

MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads

→ Chapter 2, Solid carbide drilling

Page No. 2|105

Solid Carbide NC Spot Drills

Ø 8, 10, 12, 16, 20 mm
NOF 2

SIG 90°



SIG 120°



SIG 142°

→ Chapter 4, Reaming and countersinking

Page No. 4|18 + 4|19

Replaceable reaming heads

Ø 8,00 – 30,20 mm



Through hole

Ø 12,20 – 30,20 mm



Blind hole


→ Chapter 14, Solid carbide milling cutters

Page No. 14|197 – 14|201

Solid carbide shoulder mills

Ø 8, 10, 12, 16, 20 mm /
ZEFP 3+4

Type PCR-UNI




Type PCR-ALU



Type N

Solid carbide torus bull nose milling cutters

Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4



Type W



Type N

Solid carbide rough and finish milling cutters


Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6



Type NF

Solid carbide finish milling cutters

Ø 8, 10, 12, 16, 20 mm / ZEFP 6



Type N

Solid carbide ball-nosed end mills

Ø 10, 12, 16, 20 mm / ZEFP 4



Type N

Solid carbide high-feed cutters

Ø 8, 10, 12, 16, 20 mm / ZEFP 6



Type N

Solid carbide quarter round cutter

Ø 8, 10, 12, 16, 20 mm / ZEFP 6



Type N

Solid carbide deburring cutters

Ø 10, 12, 16, 20 mm / ZEFP 4+6



Type N



Type N

NOF / ZEFP = Number of cutting edges

Tool holder

→ Catalogue – Clamping technology, Chapter 16 Accessories

Page No. 16|253 – 16|255

extra short / OAL 60 – 90 mm



Tapered 87° / Steel



Cylindrical* / Steel

short / OAL 85 – 120 mm



Tapered 87° / Steel



Cylindrical* / Steel

Tapered 87° / Solid
carbide

Cylindrical* / Solid carbide

medium / OAL 110 – 150 mm



Tapered 87° / Solid carbide



Cylindrical* / Solid carbide

long / OAL 150 – 200 mm



Tapered 87° / Solid carbide



Cylindrical* / Steel



Cylindrical* / Solid carbide

extra long / OAL 200 – 250 mm



Cylindrical* / Steel




Cylindrical* / Solid carbide

* only conditionally suitable for milling

MultiChange – Reaming Head, for Thro' Holes

- ▲ Up to tolerance class IT 7 with absolute process security, from the first hole
- ▲ High-speed reaming heads
- ▲ Irregular pitch for highest radial run-out accuracy
- ▲ A high level of changeover precision guaranteed
- ▲ SZID = Coupling size



CWC10

TiAlN

K10



Left Hand Helix
PLGANG 30°
CERMET
Through hole

Left Hand Helix
PLGANG 30°
HM
Through hole

straight flute
PLGANG 45°
Solid carbide
Through hole

DC _{H7} mm	SZID	L mm	LPR mm	ZEFP	DRVS mm	TQX Nm	40 210 ...	40 220 ...	40 240 ...
8,00	06	8	18	4	6	5,0	080	080	080 ¹⁾
8,01 - 9,70	06	8	18	4	6	5,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
9,71 - 9,99	06	8	18	6	8	5,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
10,00	06	8	18	6	8	5,0	100	100	100 ¹⁾
10,01 - 10,70	06	8	18	6	8	5,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
10,71 - 11,99	08	8	20	6	8	12,5	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
12,00	08	8	20	6	8	12,5	120	120	120 ¹⁾
12,01 - 12,70	08	8	20	6	8	12,5	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
12,71 - 13,99	10	8	22	6	10	15,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
14,00	10	8	22	6	10	15,0	140	140	140 ¹⁾
14,01 - 15,99	10	8	22	6	10	15,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
16,00	10	8	22	6	10	15,0	160	160	160 ¹⁾
16,01 - 16,20	10	8	22	6	10	15,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
16,21 - 17,20	10	8	22	6	13	15,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
17,21 - 17,99	12	12	26	6	13	20,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
18,00	12	12	26	6	13	20,0	180	180	180 ¹⁾
18,01 - 19,20	12	12	26	6	13	20,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
19,21 - 19,99	12	12	26	6	16	20,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
20,00	12	12	26	6	16	20,0	200	200	200 ¹⁾
20,01 - 20,20	12	12	26	6	16	20,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
20,21 - 21,20	12	12	26	6	16	20,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
21,21 - 21,99	16	12	26	6	16	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
22,00	16	12	26	6	16	25,0	220	220	220 ¹⁾
22,01 - 23,99	16	12	26	6	16	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
24,00	16	12	26	6	16	25,0	240	240	240 ¹⁾
24,01 - 24,20	16	12	26	6	16	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
24,21 - 24,99	16	12	26	6	19	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
25,00	16	12	26	6	19	25,0	250	250	250 ¹⁾
25,01 - 25,99	16	12	26	6	19	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
26,00	16	12	26	6	19	25,0	260	260	260 ¹⁾
26,01 - 26,20	16	12	26	6	19	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
26,21 - 27,99	16	12	26	6	21	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
28,00	16	12	26	6	21	25,0	280	280	280 ¹⁾
28,01 - 28,20	16	12	26	6	21	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
28,21 - 29,20	16	12	26	6	24	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
29,21 - 29,99	16	12	26	8	24	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
30,00	16	12	26	8	24	25,0	300	300	300 ¹⁾
30,01 - 30,20	16	12	26	8	24	25,0	xxxx ¹⁾	xxxx ²⁾	xxxx ¹⁾
P							●	●	
M									
K							●		
N									●
S									
H									
O									

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 12 working days / Minimum order 2 pieces
 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 23 working days / Minimum order 2 pieces

→ v. Page 76



For xxxx please indicate requested diameter in H7 in the order (e.g. 10.89 H7 → article no. 40 210 1089)!


All other diameters and tolerance classes are also possible on request (e.g. 8.5^{+0.025} or 11 N7).



Holders and accessories can be found in → **Catalogue – Clamping technology, Chapter 16.**

MultiChange – Reaming Head, for blind holes

- ▲ Up to tolerance class IT 7 with absolute process security, from the first hole
- ▲ High-speed reaming heads
- ▲ Irregular pitch for highest radial run-out accuracy
- ▲ A high level of changeover precision guaranteed
- ▲ SZID = Coupling size



CWC10

TiAlN

K10


 straight flute
PLGANG 60°
CERMET
Blind hole

 straight flute
PLGANG 60°
HM
Blind hole

 straight flute
PLGANG 60°
Solid carbide
Blind hole

40 211 ...

40 221 ...

40 241 ...

DC _{H7} mm	SZID	L mm	LPR mm	ZEFP	DRVS mm	TQX Nm
12,20 - 12,70	06	8	20	6	6	5,0
12,71 - 13,99	06	8	22	6	6	5,0
14,00	06	8	22	6	6	5,0
14,01 - 14,20	06	8	22	6	6	5,0
14,21 - 15,99	08	8	22	6	8	12,5
16,00	08	8	22	6	8	12,5
16,01 - 16,20	08	8	22	6	8	12,5
16,21 - 17,20	10	8	22	6	10	15,0
17,21 - 17,99	10	12	26	6	10	15,0
18,00	10	12	26	6	10	15,0
18,01 - 19,99	10	12	26	6	10	15,0
20,00	10	12	26	6	10	15,0
20,01 - 20,20	10	12	26	6	10	15,0
20,21 - 21,99	12	12	26	6	13	20,0
22,00	12	12	26	6	13	20,0
22,01 - 23,99	12	12	26	6	13	20,0
24,00	12	12	26	6	13	20,0
24,01 - 24,20	12	12	26	6	13	20,0
24,21 - 24,99	16	12	26	6	16	25,0
25,00	16	12	26	6	16	25,0
25,01 - 25,99	16	12	26	6	16	25,0
26,00	16	12	26	6	16	25,0
26,01 - 27,99	16	12	26	6	16	25,0
28,00	16	12	26	6	16	25,0
28,01 - 28,20	16	12	26	6	16	25,0
28,21 - 29,20	16	12	26	6	16	25,0
29,21 - 29,99	16	12	26	8	16	25,0
30,00	16	12	26	8	16	25,0
30,01 - 30,20	16	12	26	8	16	25,0

P	•	•	
M		•	
K	•		
N			•
S			
H			
O			

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 12 working days / Minimum order 2 pieces
 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 23 working days / Minimum order 2 pieces

→ v. Page 76



For xxxx please indicate requested diameter in H7 in the order (e.g. 12.89 H7 → article no. 40 211 1289)!
 All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 15 N7).



Holders and accessories can be found in → **Catalogue – Clamping technology, Chapter 16.**

Monomax – Selection guide



Ø 5,60 – 25,89 mm										
Article no. (3xD)	40 635 ...	40 625 ...	40 656 ...	40 652 ...	40 648 ...	40 605 ...	40 657 ...	40 644 ...	40 640 ...	
Article no. (5xD)	40 636 ...	40 626 ...	40 666 ...	40 653 ...	40 649 ...	40 606 ...	40 665 ...	40 645 ...	40 641 ...	
KOMET no. (3xD)	56J.93	56J.93	56J.65	56J.65	56J.17	56J.71	56H.65	56H.65	56H.17	
KOMET no. (5xD)	56R.93	56R.93	56R.65	56R.65	56R.17	56R.71	56Q.65	56Q.65	56Q.17	
Cutting edge geometry	ASG4000	ASG3000	ASG3000	ASG0106	ASG0706	ASG3000	ASG3000	ASG0106	ASG0706	
Lead angle	25°	45°	45°	45°	45°/8°	45°	45°	45°	45°/8°	
Grade / coating	DST	DST	DBG-P	DBG-P	DBC	TIN	DBG-P	DBG-P	DBC	
Preferred type available	✓	✓	✓	✓		✓				
Application	Through hole						Blind hole			
Material sub-group	Index									
P	Non alloyed steel	P.1.1	●	●	●		○	●		
		P.1.2	●	●	●		○	●		
		P.1.3	●	●	●		○	●		
		P.1.4	●	●	●		○	●		
		P.1.5	●	●	●		○	●		
	Low alloyed steel	P.2.1	●	●	●		○	●		
		P.2.2	●	●	●		○	●		
		P.2.3	●	●	●		○	●		
		P.2.4			●	●	○	●		
	High-alloy steel and high-alloy tool steel	P.3.1				●			●	
		P.3.2				●			●	
		P.3.3				●			●	
	Stainless steel	P.4.1				●			●	
		P.4.2				●			●	
M	Stainless steel	M.1.1				●			●	
		M.2.1				●			●	
		M.3.1				●			●	
K	Grey cast iron	K.1.1			●		○	●		
		K.1.2			●		○	●		
	Spherulitic graphite cast iron	K.2.1	○	●	●			●		
		K.2.2	○	●	●			●		
	Malleable iron	K.3.1	○	●	●			●		
		K.3.2	○	●	●			●		
N	Aluminum alloys	N.1.1				●				●
		N.1.2				●				●
	Cast aluminium alloys	N.2.1				●				●
		N.2.2				●				●
		N.2.3				●				●
	Copper and copper alloys (Bronze, Brass)	N.3.1		○			●			
		N.3.2		○			●			
		N.3.3					●			
	Magnesium alloys	N.4.1								
O	Non-metal materials	O.1.1								
		O.1.2								
		O.2.1								
		O.2.2								
		O.3.1				○				○

● = Main application

○ = Additional range of application

Monomax – High-speed reamers, short

- ▲ adjustable for smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

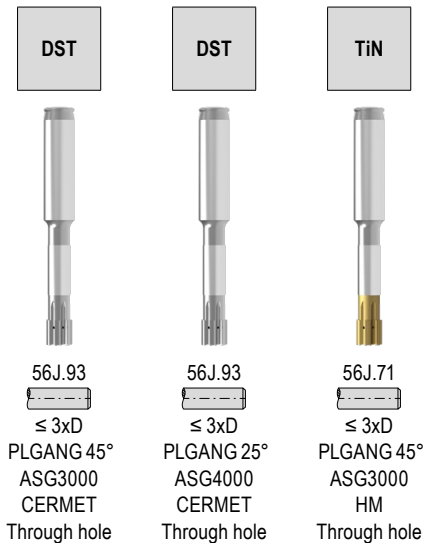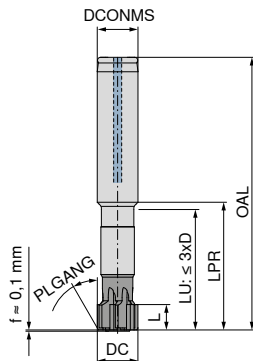

40 625 ...	40 635 ...	40 605 ...
56J.93 ≤ 3xD PLGANG 45° ASG3000 CERMET Through hole	56J.93 ≤ 3xD PLGANG 25° ASG4000 CERMET Through hole	56J.71 ≤ 3xD PLGANG 45° ASG3000 HM Through hole
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
060	060	060
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
080	080	080
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
100	100	100
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
120	120	120
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
140	140	140
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
150	150	150
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
160	160	160
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
180	180	180
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
200	200	200
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
5,60 - 5,99	9,5	35	40	85	12	4
6,00	9,5	35	40	85	12	4
6,01 - 7,99	9,5	35	40	85	12	4
8,00	9,5	35	40	85	12	4
8,01 - 8,89	9,5	35	40	85	12	4
8,90 - 9,89	9,5	45	50	95	12	6
9,90 - 9,99	9,5	45	50	95	12	6
10,00	9,5	45	50	95	12	6
10,01 - 11,99	9,5	45	50	95	12	6
12,00	9,5	45	50	95	12	6
12,01 - 13,99	9,5	45	50	95	12	6
14,00	9,5	45	50	95	12	6
14,01 - 14,99	9,5	45	50	95	12	6
15,00	9,5	45	50	95	12	6
15,01 - 15,89	9,5	45	50	95	12	6
15,90 - 15,99	9,5	45	50	100	16	6
16,00	9,5	45	50	100	16	6
16,01 - 17,99	9,5	45	50	100	16	6
18,00	9,5	45	50	100	16	6
18,01 - 18,89	9,5	45	50	100	16	6
18,90 - 19,99	9,5	55	60	120	20	6
20,00	9,5	55	60	120	20	6
20,01 - 25,89	9,5	55	60	120	20	6

P	●	●	○
M			
K	●	○	○
N	○		●
S			
H			
O			

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v. Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 635 1589)!


All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

Further information on chamfer geometries (ASG) can be found on → **page 100**.

Monomax – High-speed reamers, short

- ▲ adjustable for smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

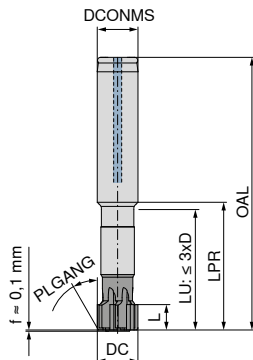

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	40 652 ...	40 648 ...	40 656 ...
5,60 - 5,99	9,5	35	40	85	12	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
6,00	9,5	35	40	85	12	4	06000	06000 ¹⁾	06000
6,01 - 7,99	9,5	35	40	85	12	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
8,00	9,5	35	40	85	12	4	08000	08000 ¹⁾	08000
8,01 - 8,89	9,5	35	40	85	12	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
8,90 - 9,89	9,5	45	50	95	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
9,90 - 9,99	9,5	45	50	95	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
10,00	9,5	45	50	95	12	6	10000	10000 ¹⁾	10000
10,01 - 11,99	9,5	45	50	95	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
12,00	9,5	45	50	95	12	6	12000	12000 ¹⁾	12000
12,01 - 13,99	9,5	45	50	95	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
14,00	9,5	45	50	95	12	6	14000	14000 ¹⁾	14000
14,01 - 14,99	9,5	45	50	95	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
15,00	9,5	45	50	95	12	6	15000	15000 ¹⁾	15000
15,01 - 15,89	9,5	45	50	95	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
15,90 - 15,99	9,5	45	50	100	16	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
16,00	9,5	45	50	100	16	6	16000	16000 ¹⁾	16000
16,01 - 17,99	9,5	45	50	100	16	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
18,00	9,5	45	50	100	16	6	18000	18000 ¹⁾	18000
18,01 - 18,89	9,5	45	50	100	16	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
18,90 - 19,99	9,5	55	60	120	20	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
20,00	9,5	55	60	120	20	6	20000	20000 ¹⁾	20000
20,01 - 25,89	9,5	55	60	120	20	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
P							•		•
M							•		
K									•
N								•	
S									
H									
O								○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v. Page 77–80



Do not heat shrink tools !



For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 652 1589)!

All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7).




Detailed adjustment instructions are available to download in the online shop for the item.



Further information on chamfer geometries (ASG) can be found on → page 100.


Monomax – High-speed reamers, short

- ▲ adjustable for smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

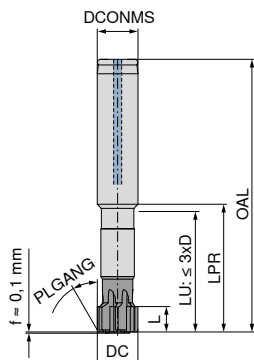

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
5,60 - 5,99	9,5	35	40	85	12	4
6,00	9,5	35	40	85	12	4
6,01 - 7,99	9,5	35	40	85	12	4
8,00	9,5	35	40	85	12	4
8,01 - 8,89	9,5	35	40	85	12	4
8,90 - 9,89	9,5	45	50	95	12	6
9,90 - 9,99	9,5	45	50	95	12	6
10,00	9,5	45	50	95	12	6
10,01 - 11,99	9,5	45	50	95	12	6
12,00	9,5	45	50	95	12	6
12,01 - 13,99	9,5	45	50	95	12	6
14,00	9,5	45	50	95	12	6
14,01 - 14,99	9,5	45	50	95	12	6
15,00	9,5	45	50	95	12	6
15,01 - 15,89	9,5	45	50	95	12	6
15,90 - 15,99	9,5	45	50	100	16	6
16,00	9,5	45	50	100	16	6
16,01 - 17,99	9,5	45	50	100	16	6
18,00	9,5	45	50	100	16	6
18,01 - 18,89	9,5	45	50	100	16	6
18,90 - 19,99	9,5	55	60	120	20	6
20,00	9,5	55	60	120	20	6
20,01 - 25,89	9,5	55	60	120	20	6

P			
M			
K			
N			
S			
H			
O			

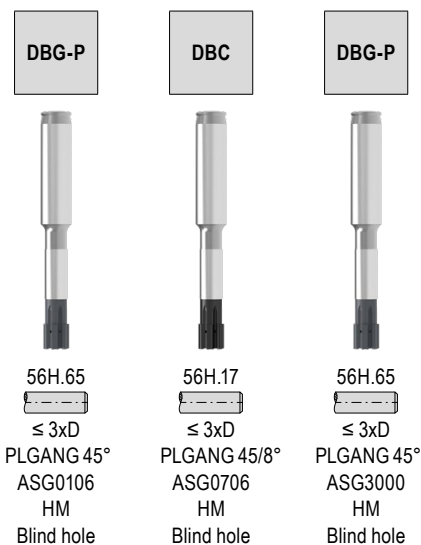

40 644 ...	40 640 ...	40 657 ...
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
06000 ¹⁾	06000 ¹⁾	06000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
08000 ¹⁾	08000 ¹⁾	08000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
10000 ¹⁾	10000 ¹⁾	10000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
12000 ¹⁾	12000 ¹⁾	12000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
14000 ¹⁾	14000 ¹⁾	14000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
15000 ¹⁾	15000 ¹⁾	15000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
16000 ¹⁾	16000 ¹⁾	16000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
18000 ¹⁾	18000 ¹⁾	18000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
20000 ¹⁾	20000 ¹⁾	20000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v. Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 644 1589)!


All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

Further information on chamfer geometries (ASG) can be found on → page 100.

Monomax – High-speed reamers, long

- ▲ adjustable for the smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

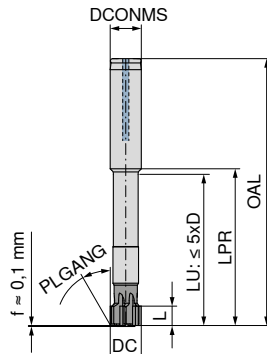

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
5,60 - 5,99	9,5	80	85	130	12	4
6,00	9,5	80	85	130	12	4
6,01 - 7,99	9,5	80	85	130	12	4
8,00	9,5	80	85	130	12	4
8,01 - 8,89	9,5	80	85	130	12	4
8,90 - 9,89	9,5	80	85	130	12	6
9,90 - 9,99	9,5	110	115	160	12	6
10,00	9,5	110	115	160	12	6
10,01 - 11,99	9,5	110	115	160	12	6
12,00	9,5	110	115	160	12	6
12,01 - 13,99	9,5	110	115	160	12	6
14,00	9,5	110	115	160	12	6
14,01 - 14,99	9,5	110	115	160	12	6
15,00	9,5	110	115	160	12	6
15,01 - 15,89	9,5	110	115	160	12	6
15,90 - 15,99	9,5	125	130	180	16	6
16,00	9,5	125	130	180	16	6
16,01 - 17,99	9,5	125	130	180	16	6
18,00	9,5	125	130	180	16	6
18,01 - 18,89	9,5	125	130	180	16	6
18,90 - 19,99	9,5	135	140	200	20	6
20,00	9,5	135	140	200	20	6
20,01 - 25,89	9,5	135	140	200	20	6

	40 626 ...	40 636 ...	40 606 ...
P	●	●	○
M			
K	●	○	○
N	○		●
S			
H			
O			

DST	DST	TiN
56R.93 ≤ 5xD PLGANG 45° ASG3000 CERMET Through hole	56R.93 ≤ 5xD PLGANG 25° ASG4000 CERMET Through hole	56R.71 ≤ 5xD PLGANG 45° ASG3000 HM Through hole
40 626 ...	40 636 ...	40 606 ...
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
060	060	060
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
080	080	080
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
100	100	100
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
120	120	120
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
140	140	140
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
150	150	150
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
160	160	160
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
180	180	180
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
200	200	200
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v. Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 636 1589)!


All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

Further information on chamfer geometries (ASG) can be found on → **page 100**.

Monomax – High-speed reamers, long

- ▲ adjustable for the smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

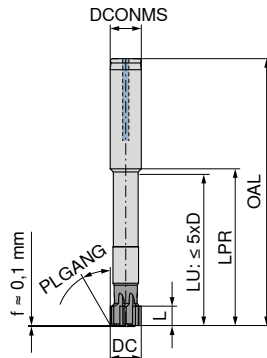

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	40 653 ...	40 649 ...	40 666 ...
5,60 - 5,99	9,5	80	85	130	12	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
6,00	9,5	80	85	130	12	4	06000	06000 ¹⁾	06000
6,01 - 7,99	9,5	80	85	130	12	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
8,00	9,5	80	85	130	12	4	08000	08000 ¹⁾	08000
8,01 - 8,89	9,5	80	85	130	12	4	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
8,90 - 9,89	9,5	80	85	130	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
9,90 - 9,99	9,5	110	115	160	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
10,00	9,5	110	115	160	12	6	10000	10000 ¹⁾	10000
10,01 - 11,99	9,5	110	115	160	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
12,00	9,5	110	115	160	12	6	12000	12000 ¹⁾	12000
12,01 - 13,99	9,5	110	115	160	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
14,00	9,5	110	115	160	12	6	14000	14000 ¹⁾	14000
14,01 - 14,99	9,5	110	115	160	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
15,00	9,5	110	115	160	12	6	15000	15000 ¹⁾	15000
15,01 - 15,89	9,5	110	115	160	12	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
15,90 - 15,99	9,5	125	130	180	16	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
16,00	9,5	125	130	180	16	6	16000	16000 ¹⁾	16000
16,01 - 17,99	9,5	125	130	180	16	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
18,00	9,5	125	130	180	16	6	18000	18000 ¹⁾	18000
18,01 - 18,89	9,5	125	130	180	16	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
18,90 - 19,99	9,5	135	140	200	20	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
20,00	9,5	135	140	200	20	6	20000	20000 ¹⁾	20000
20,01 - 25,89	9,5	135	140	200	20	6	xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
P							●		●
M							●		
K									●
N								●	
S									
H									
O								○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v. Page 77–80



Do not heat shrink tools !



For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 653 1589)!

All other diameters and tolerance classes are also possible on request (e.g. 18.5 ^{+0.025} or 18 N7).




Detailed adjustment instructions are available to download in the online shop for the item.



Further information on chamfer geometries (ASG) can be found on → page 100.

Monomax – High-speed reamers, long

- ▲ adjustable for the smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

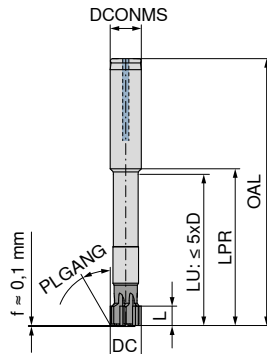

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
5,60 - 5,99	9,5	80	85	130	12	4
6,00	9,5	80	85	130	12	4
6,01 - 7,99	9,5	80	85	130	12	4
8,00	9,5	80	85	130	12	4
8,01 - 8,89	9,5	80	85	130	12	4
8,90 - 9,89	9,5	80	85	130	12	6
9,90 - 9,99	9,5	110	115	160	12	6
10,00	9,5	110	115	160	12	6
10,01 - 11,99	9,5	110	115	160	12	6
12,00	9,5	110	115	160	12	6
12,01 - 13,99	9,5	110	115	160	12	6
14,00	9,5	110	115	160	12	6
14,01 - 14,99	9,5	110	115	160	12	6
15,00	9,5	110	115	160	12	6
15,01 - 15,89	9,5	110	115	160	12	6
15,90 - 15,99	9,5	125	130	180	16	6
16,00	9,5	125	130	180	16	6
16,01 - 17,99	9,5	125	130	180	16	6
18,00	9,5	125	130	180	16	6
18,01 - 18,89	9,5	125	130	180	16	6
18,90 - 19,99	9,5	135	140	200	20	6
20,00	9,5	135	140	200	20	6
20,01 - 25,89	9,5	135	140	200	20	6

P			
M			
K			
N			
S			
H			
O			

DBG-P	DBC	DBG-P
56Q.65 ≤ 5xD PLGANG 45° ASG0106 HM Blind hole	56Q.17 ≤ 5xD PLGANG 45/8° ASG0706 HM Blind hole	56Q.65 ≤ 5xD PLGANG 45° ASG3000 HM Blind hole
40 645 ...	40 641 ...	40 665 ...
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
06000 ¹⁾	06000 ¹⁾	06000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
08000 ¹⁾	08000 ¹⁾	08000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
10000 ¹⁾	10000 ¹⁾	10000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
12000 ¹⁾	12000 ¹⁾	12000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
14000 ¹⁾	14000 ¹⁾	14000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
15000 ¹⁾	15000 ¹⁾	15000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
16000 ¹⁾	16000 ¹⁾	16000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
18000 ¹⁾	18000 ¹⁾	18000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾
20000 ¹⁾	20000 ¹⁾	20000 ¹⁾
xxxx ¹⁾	xxxx ¹⁾	xxxx ¹⁾

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v. Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 645 1589)!


All other diameters and tolerance classes are also possible on request (e.g. 18.5^{+0.025} or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

Further information on chamfer geometries (ASG) can be found on → page 100.

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

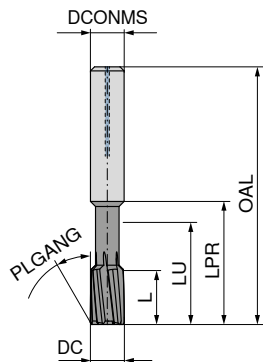

51P.57

Left Hand Helix
PLGANG 30°
ASG2210
Solid carbide
Through hole

40 483 ...

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	
4	12	24	28	50	4	4	04000
5	12	31	36	64	6	4	05000
6	12	31	36	64	6	4	06000
7	16	31	36	70	8	6	07000
8	16	31	36	70	8	6	08000
9	16	35	40	80	10	6	09000
10	16	35	40	80	10	6	10000
11	20	40	45	90	12	6	11000
12	20	40	45	90	12	6	12000
16	20	40	45	93	16	8	16000

P	●
M	●
K	●
N	○
S	○
H	○
O	○


→ v_c Page 83

Further information on chamfer geometries (ASG) can be found on → page 100.

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

- ▲ tolerance: $\varnothing 2,96 - 6,03 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 6,04 - 20,05 \text{ mm} = +0,005 \text{ mm}$

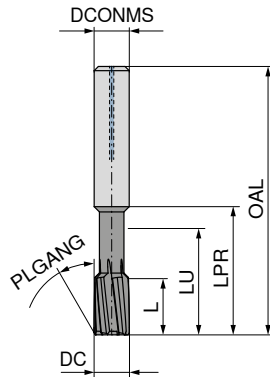

51P.57

Left Hand Helix
PLGANG 30°
ASG2210
Solid carbide
Through hole

40 489 ...

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS mm	h ₆	ZEFP	
2,96 - 3,96	12	24	28	50	4	4		xxxxx ¹⁾
3,97	12	24	28	50	4	4		03970
3,98	12	24	28	50	4	4		03980
3,99	12	24	28	50	4	4		03990
4,00	12	24	28	50	4	4		04000
4,01	12	24	28	50	4	4		04010
4,02	12	24	28	50	4	4		04020
4,03	12	24	28	50	4	4		04030
4,04 - 4,05	12	24	28	50	4	4		xxxxx ¹⁾
4,06 - 4,96	12	31	36	64	6	4		xxxxx ¹⁾
4,97	12	31	36	64	6	4		04970
4,98	12	31	36	64	6	4		04980
4,99	12	31	36	64	6	4		04990
5,00	12	31	36	64	6	4		05000
5,01	12	31	36	64	6	4		05010
5,02	12	31	36	64	6	4		05020
5,03	12	31	36	64	6	4		05030
5,04 - 5,96	12	31	36	64	6	4		xxxxx ¹⁾
5,97	12	31	36	64	6	4		05970
5,98	12	31	36	64	6	4		05980
5,99	12	31	36	64	6	4		05990
6,00	12	31	36	64	6	4		06000
6,01	12	31	36	64	6	4		06010
6,02	12	31	36	64	6	4		06020
6,03	12	31	36	64	6	4		06030
6,04 - 6,05	12	31	36	64	6	4		xxxxx ¹⁾
6,06 - 7,96	16	31	36	70	8	6		xxxxx ¹⁾
7,97	16	31	36	70	8	6		07970
7,98	16	31	36	70	8	6		07980
7,99	16	31	36	70	8	6		07990
8,00	16	31	36	70	8	6		08000
8,01	16	31	36	70	8	6		08010
8,02	16	31	36	70	8	6		08020
8,03	16	31	36	70	8	6		08030
8,04 - 8,05	16	31	36	70	8	6		xxxxx ¹⁾
P								●
M								●
K								●
N								○
S								○
H								○
O								○

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v. Page 83



This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 489 08820)!




Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

- ▲ tolerance: $\varnothing 2,96 - 6,03 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 6,04 - 20,05 \text{ mm} = +0,005 \text{ mm}$

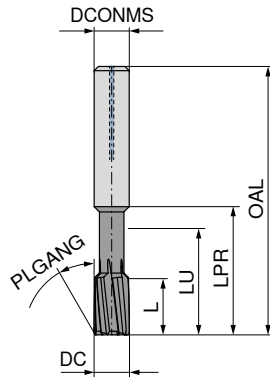

51P.57

Left Hand Helix
PLGANG 30°
ASG2210
Solid carbide
Through hole

40 489 ...

DC $+0,004/+0,005$ mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h_6 mm	ZEFP	
8,06 - 9,96	16	35	40	80	10	6	xxxxx ¹⁾
9,97	16	35	40	80	10	6	09970
9,98	16	35	40	80	10	6	09980
9,99	16	35	40	80	10	6	09990
10,00	16	35	40	80	10	6	10000
10,01	16	35	40	80	10	6	10010
10,02	16	35	40	80	10	6	10020
10,03	16	35	40	80	10	6	10030
10,04 - 10,05	16	35	40	80	10	6	xxxxx ¹⁾
10,06 - 11,96	20	40	45	90	12	6	xxxxx ¹⁾
11,97	20	40	45	90	12	6	11970
11,98	20	40	45	90	12	6	11980
11,99	20	40	45	90	12	6	11990
12,00	20	40	45	90	12	6	12000
12,01	20	40	45	90	12	6	12010
12,02	20	40	45	90	12	6	12020
12,03	20	40	45	90	12	6	12030
12,04 - 12,05	20	40	45	90	12	6	xxxxx ¹⁾
12,06 - 14,05	20	40	45	90	14	6	xxxxx ¹⁾
14,06 - 15,96	20	40	45	93	16	6	xxxxx ¹⁾
15,97 - 16,05	20	40	45	93	16	8	xxxxx ¹⁾
16,06 - 18,05	20	47	52	100	18	8	xxxxx ¹⁾
18,06 - 20,05	20	45	50	102	20	8	xxxxx ¹⁾

P	●
M	●
K	●
N	○
S	○
H	○
O	○

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v. Page 83




This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 489 08820)!



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

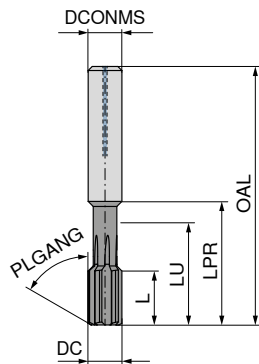

51M.57



straight flute
PLGANG 60°
ASG2110
Solid carbide
Blind hole

40 481 ...

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	
4	12	24	28	50	4	4	04000
5	12	31	36	64	6	4	05000
6	12	31	36	64	6	4	06000
7	16	31	36	70	8	6	07000
8	16	31	36	70	8	6	08000
9	16	35	40	80	10	6	09000
10	16	35	40	80	10	6	10000
11	20	40	45	90	12	6	11000
12	20	40	45	90	12	6	12000
16	20	40	45	93	16	8	16000
P							●
M							●
K							●
N							○
S							○
H							○
O							○


→ v_c Page 83

Further information on chamfer geometries (ASG) can be found on → page 100.

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

- ▲ tolerance: $\varnothing 2,96 - 6,03 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 6,04 - 20,05 \text{ mm} = +0,005 \text{ mm}$

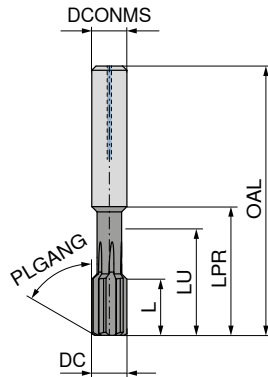

51M.57



straight flute
PLGANG 60°
ASG2110
Solid carbide
Blind hole

40 488 ...

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS mm	h ₆	ZEFP	
2,96 - 3,96	12	24	28	50	4	4		xxxxx ¹⁾
3,97	12	24	28	50	4	4		03970
3,98	12	24	28	50	4	4		03980
3,99	12	24	28	50	4	4		03990
4,00	12	24	28	50	4	4		04000
4,01	12	24	28	50	4	4		04010
4,02	12	24	28	50	4	4		04020
4,03	12	24	28	50	4	4		04030
4,04 - 4,05	12	24	28	50	4	4		xxxxx ¹⁾
4,06 - 4,96	12	31	36	64	6	4		xxxxx ¹⁾
4,97	12	31	36	64	6	4		04970
4,98	12	31	36	64	6	4		04980
4,99	12	31	36	64	6	4		04990
5,00	12	31	36	64	6	4		05000
5,01	12	31	36	64	6	4		05010
5,02	12	31	36	64	6	4		05020
5,03	12	31	36	64	6	4		05030
5,04 - 5,96	12	31	36	64	6	4		xxxxx ¹⁾
5,97	12	31	36	64	6	4		05970
5,98	12	31	36	64	6	4		05980
5,99	12	31	36	64	6	4		05990
6,00	12	31	36	64	6	4		06000
6,01	12	31	36	64	6	4		06010
6,02	12	31	36	64	6	4		06020
6,03	12	31	36	64	6	4		06030
6,04 - 6,05	12	31	36	64	6	4		xxxxx ¹⁾
6,06 - 7,96	16	31	36	70	8	6		xxxxx ¹⁾
7,97	16	31	36	70	8	6		07970
7,98	16	31	36	70	8	6		07980
7,99	16	31	36	70	8	6		07990
8,00	16	31	36	70	8	6		08000
8,01	16	31	36	70	8	6		08010
8,02	16	31	36	70	8	6		08020
8,03	16	31	36	70	8	6		08030
8,04 - 8,05	16	31	36	70	8	6		xxxxx ¹⁾
P								●
M								●
K								●
N								○
S								○
H								○
O								○

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v. Page 83



This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 488 08820)!




Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

- ▲ tolerance: $\varnothing 2,96 - 6,03 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 6,04 - 20,05 \text{ mm} = +0,005 \text{ mm}$

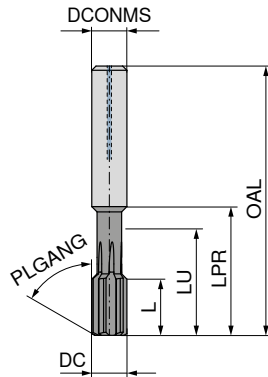

51M.57



straight flute
PLGANG 60°
ASG2110
Solid carbide
Blind hole

40 488 ...

DC $+0,004/+0,005$ mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h_6 mm	ZEFP	
8,06 - 9,96	16	35	40	80	10	6	xxxxx ¹⁾
9,97	16	35	40	80	10	6	09970
9,98	16	35	40	80	10	6	09980
9,99	16	35	40	80	10	6	09990
10,00	16	35	40	80	10	6	10000
10,01	16	35	40	80	10	6	10010
10,02	16	35	40	80	10	6	10020
10,03	16	35	40	80	10	6	10030
10,04 - 10,05	16	35	40	80	10	6	xxxxx ¹⁾
10,06 - 11,96	20	40	45	90	12	6	xxxxx ¹⁾
11,97	20	40	45	90	12	6	11970
11,98	20	40	45	90	12	6	11980
11,99	20	40	45	90	12	6	11990
12,00	20	40	45	90	12	6	12000
12,01	20	40	45	90	12	6	12010
12,02	20	40	45	90	12	6	12020
12,03	20	40	45	90	12	6	12030
12,04 - 12,05	20	40	45	90	12	6	xxxxx ¹⁾
12,06 - 14,05	20	40	45	90	14	6	xxxxx ¹⁾
14,06 - 15,96	20	40	45	93	16	6	xxxxx ¹⁾
15,97 - 16,05	20	40	45	93	16	8	xxxxx ¹⁾
16,06 - 18,05	20	47	52	100	18	8	xxxxx ¹⁾
18,06 - 20,05	20	45	50	102	20	8	xxxxx ¹⁾

P	●
M	●
K	●
N	○
S	○
H	○
O	○

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v. Page 83





This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 488 08820)!



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

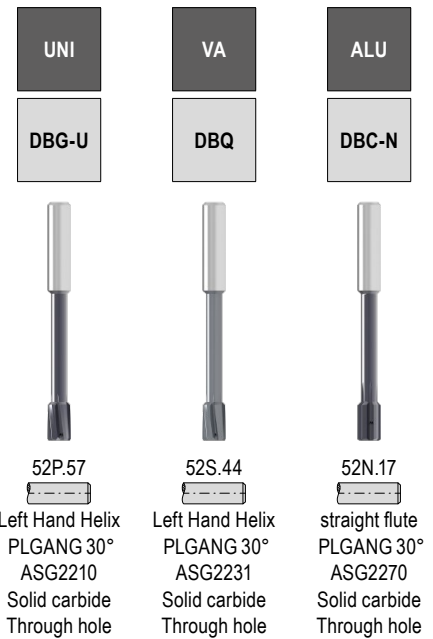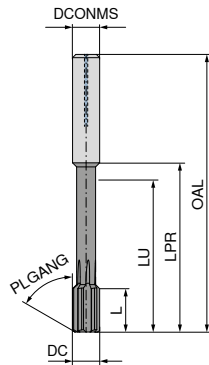

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	40 484 ...	40 401 ...	40 471 ...
4	12	28	32	60	4	4	04000	04000	04000 ¹⁾
5	12	35	40	76	6	4	05000	05000	05000 ¹⁾
6	12	35	40	76	6	4	06000	06000	06000 ¹⁾
7	16	60	65	101	8	6	07000	07000	07000 ¹⁾
8	16	60	65	101	8	6	08000	08000	08000 ¹⁾
9	16	63	68	108	10	6	09000	09000	09000 ¹⁾
10	16	63	68	108	10	6	10000	10000	10000 ¹⁾
11	20	80	85	130	12	6	11000	11000	11000 ¹⁾
12	20	80	85	130	12	6	12000	12000	12000 ¹⁾
16	20	97	102	150	16	6	16000	16000	16000 ¹⁾
P							●	●	
M							●	●	
K							●		
N							○		●
S							○		
H							○		
O									○


1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 81+82Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

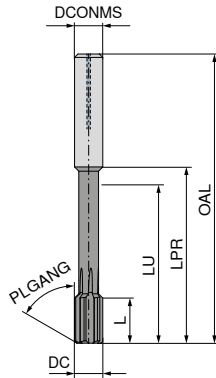

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52P.57 Left Hand Helix PLGANG 30° ASG2210 Solid carbide Through hole	52S.44 Left Hand Helix PLGANG 30° ASG2231 Solid carbide Through hole	52J.65 straight flute PLGANG 30° ASG2350 Solid carbide Through hole	52N.17 straight flute PLGANG 30° ASG2270 Solid carbide Through hole	52G.55 straight flute PLGANG 30° ASG2360 Solid carbide Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS mm	h ₆	ZEFP	40 486 ...	40 403 ...	40 477 ...	40 473 ...	40 475 ...
2,96 - 3,96	12	28	32	60	4	4		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
2,96 - 3,96	12	28	32	60	4	6						
3,97	12	28	32	60	4	4		03970	03970 ¹⁾		03970 ¹⁾	03970 ¹⁾
3,97	12	28	32	60	4	6				03970 ¹⁾		
3,98	12	28	32	60	4	4		03980	03980 ¹⁾		03980 ¹⁾	03980 ¹⁾
3,98	12	28	32	60	4	6				03980 ¹⁾		
3,99	12	28	32	60	4	4		03990	03990 ¹⁾		03990 ¹⁾	03990 ¹⁾
3,99	12	28	32	60	4	6				03990 ¹⁾		
4,00	12	28	32	60	4	4		04000	04000 ¹⁾		04000 ¹⁾	04000 ¹⁾
4,00	12	28	32	60	4	6				04000 ¹⁾		
4,01	12	28	32	60	4	4		04010	04010 ¹⁾		04010 ¹⁾	04010 ¹⁾
4,01	12	28	32	60	4	6				04010 ¹⁾		
4,02	12	28	32	60	4	4		04020	04020 ¹⁾		04020 ¹⁾	04020 ¹⁾
4,02	12	28	32	60	4	6				04020 ¹⁾		
4,03	12	28	32	60	4	4		04030	04030 ¹⁾		04030 ¹⁾	04040 ¹⁾
4,03	12	28	32	60	4	6				04030 ¹⁾		
4,04 - 4,05	12	28	32	60	4	4		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
4,04 - 4,05	12	28	32	60	4	6				xxxxx ¹⁾		
4,06 - 4,96	12	35	40	76	6	4		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
4,06 - 4,96	12	35	40	76	6	6				xxxxx ¹⁾		
4,97	12	35	40	76	6	4		04970	04970 ¹⁾		04970 ¹⁾	04970 ¹⁾
4,97	12	35	40	76	6	6				04970 ¹⁾		
4,98	12	35	40	76	6	4		04980	04980 ¹⁾		04980 ¹⁾	04980 ¹⁾
4,98	12	35	40	76	6	6				04980 ¹⁾		
4,99	12	35	40	76	6	4		04990	04990 ¹⁾		04990 ¹⁾	04990 ¹⁾
4,99	12	35	40	76	6	6				04990 ¹⁾		
5,00	12	35	40	76	6	4		05000	05000 ¹⁾		05000 ¹⁾	05000 ¹⁾
5,00	12	35	40	76	6	6				05000 ¹⁾		
5,01	12	35	40	76	6	4		05010	05010 ¹⁾		05010 ¹⁾	05010 ¹⁾
5,01	12	35	40	76	6	6				05010 ¹⁾		
5,02	12	35	40	76	6	4		05020	05020 ¹⁾		05020 ¹⁾	05020 ¹⁾
5,02	12	35	40	76	6	6				05020 ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
- 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82


This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 486 08820!)



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

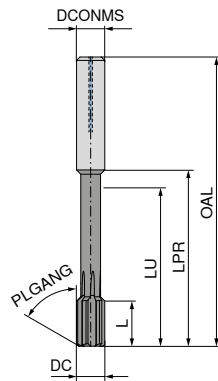

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52P.57 Left Hand Helix PLGANG 30° ASG2210 Solid carbide Through hole	52S.44 Left Hand Helix PLGANG 30° ASG2231 Solid carbide Through hole	52J.65 straight flute PLGANG 30° ASG2350 Solid carbide Through hole	52N.17 straight flute PLGANG 30° ASG2270 Solid carbide Through hole	52G.55 straight flute PLGANG 30° ASG2360 Solid carbide Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS mm	h ₆	ZEFP	40 486 ...	40 403 ...	40 477 ...	40 473 ...	40 475 ...
5,03	12	35	40	76	6	4		05030	05030 ¹⁾		05030 ¹⁾	05030 ¹⁾
5,03	12	35	40	76	6	6				05030 ¹⁾		
5,04 - 5,96	12	35	40	76	6	4		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
5,04 - 5,96	12	35	40	76	6	6				xxxxx ¹⁾		
5,97	12	35	40	76	6	4		05970	05970 ¹⁾		05970 ¹⁾	05970 ¹⁾
5,97	12	35	40	76	6	6				05970 ¹⁾		
5,98	12	35	40	76	6	4		05980	05980 ¹⁾		05980 ¹⁾	05980 ¹⁾
5,98	12	35	40	76	6	6				05980 ¹⁾		
5,99	12	35	40	76	6	4		05990	05990 ¹⁾		05990 ¹⁾	05990 ¹⁾
5,99	12	35	40	76	6	6				05990 ¹⁾		
6,00	12	35	40	76	6	4		06000	06000 ¹⁾		06000 ¹⁾	06000 ¹⁾
6,00	12	35	40	76	6	6				06000 ¹⁾		
6,01	12	35	40	76	6	4		06010	06010 ¹⁾		06010 ¹⁾	06010 ¹⁾
6,01	12	35	40	76	6	6				06010 ¹⁾		
6,02	12	35	40	76	6	4		06020	06020 ¹⁾		06020 ¹⁾	06020 ¹⁾
6,02	12	35	40	76	6	6				06020 ¹⁾		
6,03	12	35	40	76	6	4		06030	06030 ¹⁾		06030 ¹⁾	06030 ¹⁾
6,03	12	35	40	76	6	6				06030 ¹⁾		
6,04 - 6,05	12	35	40	76	6	4		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
6,04 - 6,05	12	35	40	76	6	6				xxxxx ¹⁾		
6,06 - 7,96	16	60	65	101	8	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
6,06 - 7,96	16	60	65	101	8	8				xxxxx ¹⁾		
7,97	16	60	65	101	8	6		07970	07970 ¹⁾		07970 ¹⁾	07970 ¹⁾
7,97	16	60	65	101	8	8				07970 ¹⁾		
7,98	16	60	65	101	8	6		07980	07980 ¹⁾		07980 ¹⁾	07980 ¹⁾
7,98	16	60	65	101	8	8				07980 ¹⁾		
7,99	16	60	65	101	8	6		07990	07990 ¹⁾		07990 ¹⁾	07990 ¹⁾
7,99	16	60	65	101	8	8				07990 ¹⁾		
8,00	16	60	65	101	8	6		08000	08000 ¹⁾		08000 ¹⁾	08000 ¹⁾
8,00	16	60	65	101	8	8				08000 ¹⁾		
8,01	16	60	65	101	8	6		08010	08010 ¹⁾		08010 ¹⁾	08010 ¹⁾
8,01	16	60	65	101	8	8				08010 ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
 For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 486 08820!)




Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

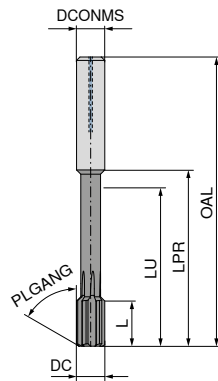

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52P.57 Left Hand Helix PLGANG 30° ASG2210 Solid carbide Through hole	52S.44 Left Hand Helix PLGANG 30° ASG2231 Solid carbide Through hole	52J.65 straight flute PLGANG 30° ASG2350 Solid carbide Through hole	52N.17 straight flute PLGANG 30° ASG2270 Solid carbide Through hole	52G.55 straight flute PLGANG 30° ASG2360 Solid carbide Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS mm	h ₆	ZEFP	40 486 ...	40 403 ...	40 477 ...	40 473 ...	40 475 ...
8,02	16	60	65	101	8	6		08020	08020 ¹⁾	08020 ¹⁾	08020 ¹⁾	08020 ¹⁾
8,02	16	60	65	101	8	8						
8,03	16	60	65	101	8	6		08030	08030 ¹⁾		08030 ¹⁾	08030 ¹⁾
8,03	16	60	65	101	8	8				08030 ¹⁾		
8,04 - 8,05	16	60	65	101	8	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
8,04 - 8,05	16	60	65	101	8	8				xxxxx ¹⁾		
8,06 - 9,96	16	63	68	108	10	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
8,06 - 9,96	16	63	68	108	10	8				xxxxx ¹⁾		
9,97	16	63	68	108	10	6		09970	09970 ¹⁾		09970 ¹⁾	09970 ¹⁾
9,97	16	63	68	108	10	8				09970 ¹⁾		
9,98	16	63	68	108	10	6		09980	09980 ¹⁾		09980 ¹⁾	09980 ¹⁾
9,98	16	63	68	108	10	8				09980 ¹⁾		
9,99	16	63	68	108	10	6		09990	09990 ¹⁾		09990 ¹⁾	09990 ¹⁾
9,99	16	63	68	108	10	8				09990 ¹⁾		
10,00	16	63	68	108	10	6		10000	10000 ¹⁾		10000 ¹⁾	10000 ¹⁾
10,00	16	63	68	108	10	8				10000 ¹⁾		
10,01	16	63	68	108	10	6		10010	10010 ¹⁾		10010 ¹⁾	10010 ¹⁾
10,01	16	63	68	108	10	8				10010 ¹⁾		
10,02	16	63	68	108	10	6		10020	10020 ¹⁾		10020 ¹⁾	10020 ¹⁾
10,02	16	63	68	108	10	8				10020 ¹⁾		
10,03	16	63	68	108	10	6		10030	10030 ¹⁾		10030 ¹⁾	10030 ¹⁾
10,03	16	63	68	108	10	8				10030 ¹⁾		
10,04 - 10,05	16	63	68	108	10	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
10,04 - 10,05	16	63	68	108	10	8				xxxxx ¹⁾		
10,06 - 11,96	20	80	85	130	12	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
10,06 - 11,96	20	80	85	130	12	8				xxxxx ¹⁾		
11,97	20	80	85	130	12	6		11970	11970 ¹⁾		11970 ¹⁾	11970 ¹⁾
11,97	20	80	85	130	12	8				11970 ¹⁾		
11,98	20	80	85	130	12	6		11980	11980 ¹⁾		11980 ¹⁾	11980 ¹⁾
11,98	20	80	85	130	12	8				11980 ¹⁾		
11,99	20	80	85	130	12	6		11990	11990 ¹⁾		11990 ¹⁾	11990 ¹⁾
11,99	20	80	85	130	12	8				11990 ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
 For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 486 08820!)




Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

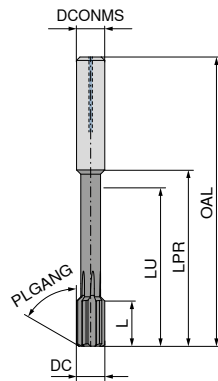

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52P.57 Left Hand Helix PLGANG 30° ASG2210 Solid carbide Through hole	52S.44 Left Hand Helix PLGANG 30° ASG2231 Solid carbide Through hole	52J.65 straight flute PLGANG 30° ASG2350 Solid carbide Through hole	52N.17 straight flute PLGANG 30° ASG2270 Solid carbide Through hole	52G.55 straight flute PLGANG 30° ASG2360 Solid carbide Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS mm	h ₆	ZEFP	40 486 ...	40 403 ...	40 477 ...	40 473 ...	40 475 ...
12,00	20	80	85	130	12	6		12000	12000 ¹⁾	12000 ¹⁾	12000 ¹⁾	12000 ¹⁾
12,00	20	80	85	130	12	8						
12,01	20	80	85	130	12	6		12010	12010 ¹⁾		12010 ¹⁾	12010 ¹⁾
12,01	20	80	85	130	12	8				12010 ¹⁾		
12,02	20	80	85	130	12	6		12020	12020 ¹⁾		12020 ¹⁾	12020 ¹⁾
12,02	20	80	85	130	12	8				12020 ¹⁾		
12,03	20	80	85	130	12	6		12030	12030 ¹⁾		12030 ¹⁾	12030 ¹⁾
12,03	20	80	85	130	12	8				12030 ¹⁾		
12,04 - 12,05	20	80	85	130	12	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
12,04 - 12,05	20	80	85	130	12	8				xxxxx ¹⁾		
12,06 - 14,05	20	80	85	130	14	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
12,06 - 14,05	20	80	85	130	14	8				xxxxx ¹⁾		
14,06 - 16,05	20	97	102	150	16	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
14,06 - 16,05	20	97	102	150	16	8				xxxxx ¹⁾		
16,06 - 18,05	20	97	102	150	18	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
16,06 - 18,05	20	97	102	150	18	8				xxxxx ¹⁾		
18,06 - 20,05	20	105	110	160	20	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
18,06 - 20,05	20	105	110	160	20	8				xxxxx ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 81+82

2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request





This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 486 08820)!



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

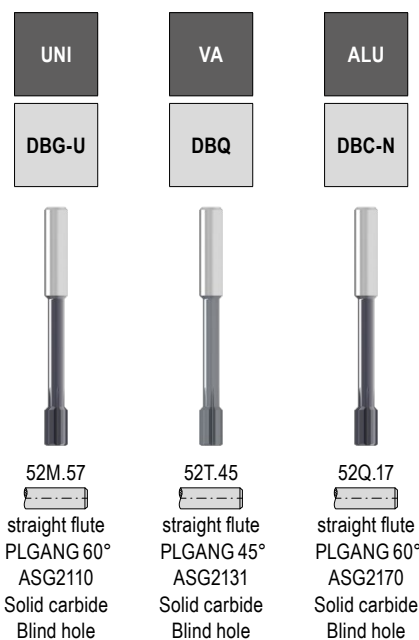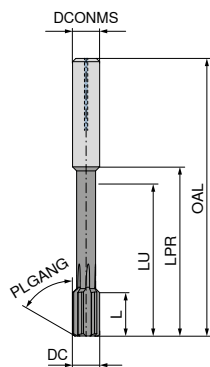

DC _{H7} mm	L mm	LU mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	40 485 ...	40 402 ...	40 472 ...
4	12	28	32	60	4	4	04000	04000	04000 ¹⁾
5	12	35	40	76	6	4	05000	05000	05000 ¹⁾
6	12	35	40	76	6	4	06000	06000	06000 ¹⁾
7	16	60	65	101	8	6	07000	07000	07000 ¹⁾
8	16	60	65	101	8	6	08000	08000	08000 ¹⁾
9	16	63	68	108	10	6	09000	09000	09000 ¹⁾
10	16	63	68	108	10	6	10000	10000	10000 ¹⁾
11	20	80	85	130	12	6	11000	11000	11000 ¹⁾
12	20	80	85	130	12	6	12000	12000	12000 ¹⁾
16	20	97	102	150	16	6	16000	16000	16000 ¹⁾
P							●	●	
M							●	●	
K							●		
N							○		●
S							○		
H							○		
O									○

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces


→ v_c Page 81+82



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

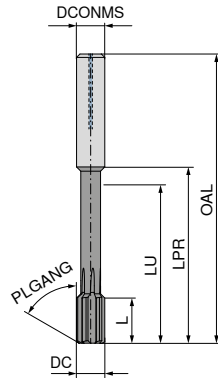

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC	L	LU	LPR	OAL	DCONMS	h ₆	ZEFP	40 487 ...	40 404 ...	40 478 ...	40 474 ...	40 476 ...
$+0,004/+0,005 \text{ mm}$	mm	mm	mm	mm	mm							
2,96 - 3,96	12	28	32	60	4	4		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
2,96 - 3,96	12	28	32	60	4	6						
3,97	12	28	32	60	4	4		03970	03970 ¹⁾		03970 ¹⁾	03970 ¹⁾
3,97	12	28	32	60	4	6				03970 ¹⁾		
3,98	12	28	32	60	4	4		03980	03980 ¹⁾		03980 ¹⁾	03980 ¹⁾
3,98	12	28	32	60	4	6				03980 ¹⁾		
3,99	12	28	32	60	4	4		03990	03990 ¹⁾		03990 ¹⁾	03990 ¹⁾
3,99	12	28	32	60	4	6				03990 ¹⁾		
4,00	12	28	32	60	4	4		04000	04000 ¹⁾		04000 ¹⁾	04000 ¹⁾
4,00	12	28	32	60	4	6				04000 ¹⁾		
4,01	12	28	32	60	4	4		04010	04010 ¹⁾		04010 ¹⁾	04010 ¹⁾
4,01	12	28	32	60	4	6				04010 ¹⁾		
4,02	12	28	32	60	4	4		04020	04020 ¹⁾		04020 ¹⁾	04020 ¹⁾
4,02	12	28	32	60	4	6				04020 ¹⁾		
4,03	12	28	32	60	4	4		04030	04030 ¹⁾		04030 ¹⁾	04030 ¹⁾
4,03	12	28	32	60	4	6				04030 ¹⁾		
4,04 - 4,05	12	28	32	60	4	4		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
4,04 - 4,05	12	28	32	60	4	6				xxxxx ¹⁾		
4,06 - 4,96	12	35	40	76	6	4		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
4,06 - 4,96	12	35	40	76	6	6				xxxxx ¹⁾		
4,97	12	35	40	76	6	4		04970	04970 ¹⁾		04970 ¹⁾	04970 ¹⁾
4,97	12	35	40	76	6	6				04970 ¹⁾		
4,98	12	35	40	76	6	4		04980	04980 ¹⁾		04980 ¹⁾	04980 ¹⁾
4,98	12	35	40	76	6	6				04980 ¹⁾		
4,99	12	35	40	76	6	4		04990	04990 ¹⁾		04990 ¹⁾	04990 ¹⁾
4,99	12	35	40	76	6	6				04990 ¹⁾		
5,00	12	35	40	76	6	4		05000	05000 ¹⁾		05000 ¹⁾	05000 ¹⁾
5,00	12	35	40	76	6	6				05000 ¹⁾		
5,01	12	35	40	76	6	4		05010	05010 ¹⁾		05010 ¹⁾	05010 ¹⁾
5,01	12	35	40	76	6	6				05010 ¹⁾		
5,02	12	35	40	76	6	4		05020	05020 ¹⁾		05020 ¹⁾	05020 ¹⁾
5,02	12	35	40	76	6	6				05020 ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
- 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82


This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 487 08820)!



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

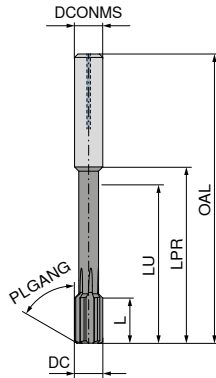

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC	L	LU	LPR	OAL	DCONMS	h ₆	ZEFP	40 487 ...	40 404 ...	40 478 ...	40 474 ...	40 476 ...
$+0,004/+0,005$ mm	mm	mm	mm	mm	mm							
5,03	12	35	40	76	6	4		05030	05030 ¹⁾	05030 ¹⁾	05030 ¹⁾	05030 ¹⁾
5,03	12	35	40	76	6	6						
5,04 - 5,96	12	35	40	76	6	4		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
5,04 - 5,96	12	35	40	76	6	6				xxxxx ¹⁾		
5,97	12	35	40	76	6	4		05970	05970 ¹⁾	05970 ¹⁾	05970 ¹⁾	05970 ¹⁾
5,97	12	35	40	76	6	6				05970 ¹⁾		
5,98	12	35	40	76	6	4		05980	05980 ¹⁾	05980 ¹⁾	05980 ¹⁾	05980 ¹⁾
5,98	12	35	40	76	6	6				05980 ¹⁾		
5,99	12	35	40	76	6	4		05990	05990 ¹⁾	05990 ¹⁾	05990 ¹⁾	05990 ¹⁾
5,99	12	35	40	76	6	6				05990 ¹⁾		
6,00	12	35	40	76	6	4		06000	06000 ¹⁾	06000 ¹⁾	06000 ¹⁾	06000 ¹⁾
6,00	12	35	40	76	6	6				06000 ¹⁾		
6,01	12	35	40	76	6	4		06010	06010 ¹⁾	06010 ¹⁾	06010 ¹⁾	06010 ¹⁾
6,01	12	35	40	76	6	6				06010 ¹⁾		
6,02	12	35	40	76	6	4		06020	06020 ¹⁾	06020 ¹⁾	06020 ¹⁾	06020 ¹⁾
6,02	12	35	40	76	6	6				06020 ¹⁾		
6,03	12	35	40	76	6	4		06030	06030 ¹⁾	06030 ¹⁾	06030 ¹⁾	06030 ¹⁾
6,03	12	35	40	76	6	6				06030 ¹⁾		
6,04 - 6,05	12	35	40	76	6	4		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
6,04 - 6,05	12	35	40	76	6	6				xxxxx ¹⁾		
6,06 - 7,96	16	60	65	101	8	6		xxxxx ²⁾	xxxxx ¹⁾		xxxxx ¹⁾	xxxxx ¹⁾
6,06 - 7,96	16	60	65	101	8	8				xxxxx ¹⁾		
7,97	16	60	65	101	8	6		07970	07970 ¹⁾	07970 ¹⁾	07970 ¹⁾	07970 ¹⁾
7,97	16	60	65	101	8	8				07970 ¹⁾		
7,98	16	60	65	101	8	6		07980	07980 ¹⁾	07980 ¹⁾	07980 ¹⁾	07980 ¹⁾
7,98	16	60	65	101	8	8				07980 ¹⁾		
7,99	16	60	65	101	8	6		07990	07990 ¹⁾	07990 ¹⁾	07990 ¹⁾	07990 ¹⁾
7,99	16	60	65	101	8	8				07990 ¹⁾		
8,00	16	60	65	101	8	6		08000	08000 ¹⁾	08000 ¹⁾	08000 ¹⁾	08000 ¹⁾
8,00	16	60	65	101	8	8				08000 ¹⁾		
8,01	16	60	65	101	8	6		08010	08010 ¹⁾	08010 ¹⁾	08010 ¹⁾	08010 ¹⁾
8,01	16	60	65	101	8	8				08010 ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82


This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
 For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 487 08820!)



Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

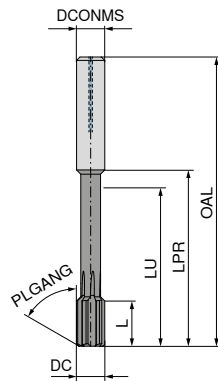

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC	L	LU	LPR	OAL	DCONMS	h ₆	ZEFP	40 487 ...	40 404 ...	40 478 ...	40 474 ...	40 476 ...
$+0,004/+0,005$ mm	mm	mm	mm	mm	mm							
8,02	16	60	65	101	8	6		08020	08020 ¹⁾	08020 ¹⁾	08020 ¹⁾	08020 ¹⁾
8,02	16	60	65	101	8	8						
8,03	16	60	65	101	8	6		08030	08030 ¹⁾		08030 ¹⁾	08030 ¹⁾
8,03	16	60	65	101	8	8				08030 ¹⁾		
8,04 - 8,05	16	60	65	101	8	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
8,04 - 8,05	16	60	65	101	8	8						
8,06 - 9,96	16	63	68	108	10	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
8,06 - 9,96	16	63	68	108	10	8				xxxxx ¹⁾		
9,97	16	63	68	108	10	6		09970	09970 ¹⁾	09970 ¹⁾	09970 ¹⁾	09970 ¹⁾
9,97	16	63	68	108	10	8						
9,98	16	63	68	108	10	6		09980	09980 ¹⁾	09980 ¹⁾	09980 ¹⁾	09980 ¹⁾
9,98	16	63	68	108	10	8						
9,99	16	63	68	108	10	6		09990	09990 ¹⁾	09990 ¹⁾	09990 ¹⁾	09990 ¹⁾
9,99	16	63	68	108	10	8						
10,00	16	63	68	108	10	6		10000	10000 ¹⁾	10000 ¹⁾	10000 ¹⁾	10000 ¹⁾
10,00	16	63	68	108	10	8						
10,01	16	63	68	108	10	6		10010	10010 ¹⁾	10010 ¹⁾	10010 ¹⁾	10010 ¹⁾
10,01	16	63	68	108	10	8						
10,02	16	63	68	108	10	6		10020	10020 ¹⁾	10020 ¹⁾	10020 ¹⁾	10020 ¹⁾
10,02	16	63	68	108	10	8						
10,03	16	63	68	108	10	6		10030	10030 ¹⁾	10030 ¹⁾	10030 ¹⁾	10030 ¹⁾
10,03	16	63	68	108	10	8				10030 ¹⁾		
10,04 - 10,05	16	63	68	108	10	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
10,04 - 10,05	16	63	68	108	10	8						
10,06 - 11,96	20	80	85	130	12	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
10,06 - 11,96	20	80	85	130	12	8				xxxxx ¹⁾		
11,97	20	80	85	130	12	6		11970	11970 ¹⁾	11970 ¹⁾	11970 ¹⁾	11970 ¹⁾
11,97	20	80	85	130	12	8						
11,98	20	80	85	130	12	6		11980	11980 ¹⁾	11980 ¹⁾	11980 ¹⁾	11980 ¹⁾
11,98	20	80	85	130	12	8						
11,99	20	80	85	130	12	6		11990	11990 ¹⁾	11990 ¹⁾	11990 ¹⁾	11990 ¹⁾
11,99	20	80	85	130	12	8						
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
- 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 487 08820!)




Further information on chamfer geometries (ASG) can be found on → **page 100**.

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings

- ▲ tolerance: $\varnothing 2,96 - 5,96 \text{ mm} = +0,004 \text{ mm}$
- ▲ tolerance: $\varnothing 5,97 - 20,05 \text{ mm} = +0,005 \text{ mm}$

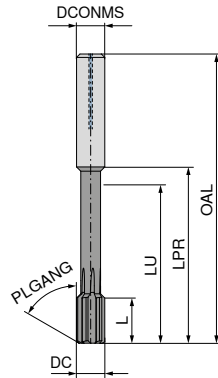

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC	L	LU	LPR	OAL	DCONMS	h ₆	ZEFP	40 487 ...	40 404 ...	40 478 ...	40 474 ...	40 476 ...
$+0,004/+0,005$ mm	mm	mm	mm	mm	mm							
12,00	20	80	85	130	12	6		12000	12000 ¹⁾	12000 ¹⁾	12000 ¹⁾	12000 ¹⁾
12,00	20	80	85	130	12	8						
12,01	20	80	85	130	12	6		12010	12010 ¹⁾		12010 ¹⁾	12010 ¹⁾
12,01	20	80	85	130	12	8				12010 ¹⁾		
12,02	20	80	85	130	12	6		12020	12020 ¹⁾	12020 ¹⁾	12020 ¹⁾	12020 ¹⁾
12,02	20	80	85	130	12	8				12020 ¹⁾		
12,03	20	80	85	130	12	6		12030	12030 ¹⁾	12030 ¹⁾	12030 ¹⁾	12030 ¹⁾
12,03	20	80	85	130	12	8				12030 ¹⁾		
12,04 - 12,05	20	80	85	130	12	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
12,04 - 12,05	20	80	85	130	12	8				xxxxx ¹⁾		
12,06 - 14,05	20	80	85	130	14	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
12,06 - 14,05	20	80	85	130	14	8				xxxxx ¹⁾		
14,06 - 16,05	20	97	102	150	16	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
14,06 - 16,05	20	97	102	150	16	8				xxxxx ¹⁾		
16,06 - 18,05	20	97	102	150	18	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
16,06 - 18,05	20	97	102	150	18	8				xxxxx ¹⁾		
18,06 - 20,05	20	105	110	160	20	6		xxxxx ²⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾	xxxxx ¹⁾
18,06 - 20,05	20	105	110	160	20	8				xxxxx ¹⁾		
P								●	●			
M								●	●			
K								●		●		
N								○			●	
S								○				
H								○				●
O											○	

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
- 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

This tool concept permits numerous tolerances. For sizes covered please refer to the table on → **page 101**.
For xxxxx please indicate required $\varnothing$ in the order (e.g. $\varnothing 8.82 \text{ mm}$ → Article No. 40 487 08820)!




Further information on chamfer geometries (ASG) can be found on → **page 100**.

NC machine reamers,
DIN 8093-2B

- ▲ extremely irregular pitch
- ▲ Ø 2–3.5 mm with centres both ends
- ▲ Ø 4–13 mm with protected centres
- ▲ from Ø 22 mm, similar to DIN 8093-2B
- ▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC

Left Hand Helix
Solid carbide
Through hole

40 420 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
2,0	12	18,5	50	3	4	020
2,5	16	29,0	60	3	4	025
3,0	17	33,0	65	4	6	030
3,2	18	33,0	65	4	6	032
3,5	18	43,0	75	4	6	035
4,0	19	43,0	75	4	6	040
4,5	21	39,0	80	6	6	045
5,0	23	52,0	93	6	6	050
5,5	26	53,0	93	6	6	055
6,0	26	53,0	93	6	6	060
6,5	28	61,0	101	6	6	065
7,0	31	68,0	109	8	6	070
7,5	31	68,0	109	8	6	075
8,0	33	77,0	117	8	6	080
8,5	33	77,0	117	8	6	085
9,0	36	80,0	125	10	6	090
9,5	36	80,0	125	10	6	095
10,0	38	88,0	133	10	6	100
10,5	38	88,0	133	10	6	105
11,0	41	97,0	142	10	6	110
12,0	44	100,0	151	12	6	120
13,0	44	100,0	151	12	6	130
14,0	47	106,0	160	16	6	140 ¹⁾
15,0	50	108,0	162	16	6	150 ¹⁾
16,0	52	116,0	170	16	6	160 ¹⁾
17,0	52	121,0	175	18	6	170 ¹⁾
18,0	52	128,0	182	18	6	180 ¹⁾
19,0	52	133,0	189	20	6	190 ¹⁾
20,0	52	139,0	195	20	6	200 ¹⁾
22,0	25	105,0	160	20	6	220 ¹⁾
24,0	25	125,0	180	20	8	240 ¹⁾
25,0	25	125,0	180	20	8	250 ¹⁾
26,0	25	125,0	180	20	8	260 ¹⁾
28,0	25	119,0	180	25	8	280 ¹⁾
30,0	25	139,0	200	25	8	300 ¹⁾


P	●
M	○
K	○
N	●
S	○
H	○
O	●

1) with carbide cutting edges

→ v_c Page 84NC machine reamers,
DIN 8093-2B

- ▲ extremely irregular pitch
- ▲ Ø 2–3.5 mm with centres both ends
- ▲ Ø 4–13 mm with protected centres
- ▲ from Ø 22 mm, similar to DIN 8093-2B
- ▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC

Left Hand Helix
Solid carbide
Through hole

40 421 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
2,0	12	18,5	50	3	4	020
2,5	16	29,0	60	3	4	025
3,0	17	33,0	65	4	6	030
3,2	18	33,0	65	4	6	032
3,5	18	43,0	75	4	6	035
4,0	19	43,0	75	4	6	040
4,5	21	39,0	80	6	6	045
5,0	23	52,0	93	6	6	050
5,5	26	53,0	93	6	6	055
6,0	26	53,0	93	6	6	060
6,5	28	61,0	101	6	6	065
7,0	31	68,0	109	8	6	070
7,5	31	68,0	109	8	6	075
8,0	33	77,0	117	8	6	080
8,5	33	77,0	117	8	6	085
9,0	36	80,0	125	10	6	090
9,5	36	80,0	125	10	6	095
10,0	38	88,0	133	10	6	100
10,5	38	88,0	133	10	6	105
11,0	41	97,0	142	10	6	110
12,0	44	100,0	151	12	6	120
13,0	44	100,0	151	12	6	130
14,0	47	106,0	160	16	6	140 ¹⁾
15,0	50	108,0	162	16	6	150 ¹⁾
16,0	52	116,0	170	16	6	160 ¹⁾
17,0	52	121,0	175	18	6	170 ¹⁾
18,0	52	128,0	182	18	6	180 ¹⁾
19,0	52	133,0	189	20	6	190 ¹⁾
20,0	52	139,0	195	20	6	200 ¹⁾

P	●
M	○
K	●
N	○
S	○
H	○
O	○

1) with carbide cutting edges

→ v_c Page 84

NC machine reamers, DIN 8093-2B

▲ 0.01 mm steps

▲ extremely irregular pitch


▲ PLGANG ≤ Ø 3.75 = 30° / > Ø 3.75 = 45°

▲ Ø 0.6–0.94 mm similar to DIN 8093-B

▲ Ø 0.95–3.75 mm with centres both ends

▲ Ø 3.76–12.05 mm with protected centres

40 430 ...

NC
100Left Hand Helix
Solid carbide
Through hole

40 430 ...

DC ^{+0,004} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
0,59 - 0,64	5	7,5	45	3	4	xxxxx ¹⁾
0,65 - 0,74	5	7,5	45	3	4	xxxxx ¹⁾
0,75 - 0,84	6	8,0	45	3	4	xxxxx ¹⁾
0,85 - 0,95	6	8,0	45	3	4	xxxxx ¹⁾
0,96	6	17,5	50	3	3	00960 ¹⁾
0,97	6	17,5	50	3	3	00970 ¹⁾
0,98	6	17,5	50	3	3	00980 ²⁾
0,99	6	17,5	50	3	3	00990 ²⁾
1,00	6	17,5	50	3	3	01000 ²⁾
1,01	6	17,5	50	3	3	01010 ²⁾
1,02	6	17,5	50	3	3	01020 ²⁾
1,03	6	17,5	50	3	3	01030 ²⁾
1,04 - 1,06	6	17,5	50	3	3	xxxxx ²⁾
1,07 - 1,18	9	17,5	50	3	3	xxxxx ²⁾
1,19 - 1,32	9	17,5	50	3	3	xxxxx ²⁾
1,33 - 1,50	9	18,0	50	3	3	xxxxx ²⁾
1,51 - 1,70	10	18,0	50	3	3	xxxxx ²⁾
1,71 - 1,90	11	18,5	50	3	4	xxxxx ²⁾
1,91 - 1,97	12	18,5	50	3	4	xxxxx ²⁾
1,98	12	18,5	50	3	4	01980
1,99	12	18,5	50	3	4	01990
2,00	12	18,5	50	3	4	02000
2,01	12	18,5	50	3	4	02010
2,02	12	18,5	50	3	4	02020
2,03	12	18,5	50	3	4	02030
2,04 - 2,12	12	18,5	50	3	4	xxxxx ²⁾
2,13 - 2,36	12	18,5	50	3	4	xxxxx ²⁾
2,37 - 2,47	16	29,0	60	3	4	xxxxx ²⁾
2,48	16	29,0	60	3	4	02480
2,49	16	29,0	60	3	4	02490
2,50	16	29,0	60	3	4	02500
2,51	16	29,0	60	3	4	02510
2,52	16	29,0	60	3	4	02520
2,53	16	29,0	60	3	4	02530
2,54 - 2,65	16	29,0	60	3	4	xxxxx ²⁾
2,66 - 2,80	17	33,0	65	4	6	xxxxx ²⁾
2,81 - 2,96	17	33,0	65	4	6	xxxxx ²⁾
2,97	17	33,0	65	4	6	02970
2,98	17	33,0	65	4	6	02980
2,99	17	33,0	65	4	6	02990
3,00	17	33,0	65	4	6	03000
3,01	17	33,0	65	4	6	03010
3,02	17	33,0	65	4	6	03020
3,03	17	33,0	65	4	6	03030
3,04 - 3,35	18	33,0	65	4	6	xxxxx ²⁾
3,36 - 3,75	18	43,0	75	4	6	xxxxx ²⁾
3,76 - 3,96	19	43,0	75	4	6	xxxxx ²⁾
3,97	19	43,0	75	4	6	03970
3,98	19	43,0	75	4	6	03980
3,99	19	43,0	75	4	6	03990
4,00	19	43,0	75	4	6	04000
4,01	19	43,0	75	4	6	04010
4,02	19	43,0	75	4	6	04020
4,03	19	43,0	75	4	6	04030
4,04 - 4,25	19	43,0	75	4	6	xxxxx ²⁾
4,26 - 4,75	21	39,0	80	6	6	xxxxx ²⁾

DC ^{+0,004} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
4,76 - 4,96	23	52,0	93	6	6	xxxxx ²⁾
4,97	23	52,0	93	6	6	04970
4,98	23	52,0	93	6	6	04980
4,99	23	52,0	93	6	6	04990
5,00	23	52,0	93	6	6	05000
5,01	23	52,0	93	6	6	05010
5,02	23	52,0	93	6	6	05020
5,03	23	52,0	93	6	6	05030
5,04 - 5,30	23	52,0	93	6	6	xxxxx ²⁾
5,31 - 5,96	26	53,0	93	6	6	xxxxx ²⁾
5,97	26	53,0	93	6	6	05970
5,98	26	53,0	93	6	6	05980
5,99	26	53,0	93	6	6	05990
6,00	26	53,0	93	6	6	06000
6,01	26	53,0	93	6	6	06010
6,02	26	53,0	93	6	6	06020
6,03	26	53,0	93	6	6	06030
6,04 - 6,70	28	61,0	101	6	6	xxxxx ²⁾
6,71 - 7,50	31	68,0	109	8	6	xxxxx ²⁾
7,51 - 7,96	33	77,0	117	8	6	xxxxx ²⁾
7,97	33	77,0	117	8	6	07970
7,98	33	77,0	117	8	6	07980
7,99	33	77,0	117	8	6	07990
8,00	33	77,0	117	8	6	08000
8,01	33	77,0	117	8	6	08010
8,02	33	77,0	117	8	6	08020
8,03	33	77,0	117	8	6	08030
8,04	33	77,0	117	8	6	08040
8,05 - 8,50	33	77,0	117	8	6	xxxxx ²⁾
8,51 - 9,04	36	80,0	125	10	6	xxxxx ²⁾
9,05 - 9,50	36	80,0	125	10	6	xxxxx ²⁾
9,51 - 9,96	38	88,0	133	10	6	xxxxx ²⁾
9,97	38	88,0	133	10	6	09970
9,98	38	88,0	133	10	6	09980
9,99	38	88,0	133	10	6	09990
10,00	38	88,0	133	10	6	10000
10,01	38	88,0	133	10	6	10010
10,02	38	88,0	133	10	6	10020
10,03	38	88,0	133	10	6	10030
10,04	38	88,0	133	10	6	10040
10,05	38	88,0	133	10	6	10050
10,06 - 10,60	38	88,0	133	10	6	xxxxx ²⁾
10,61 - 11,80	41	97,0	142	10	6	xxxxx ²⁾
11,81 - 11,96	44	100,0	151	12	6	xxxxx ²⁾
11,97	44	100,0	151	12	6	11970
11,98	44	100,0	151	12	6	11980
11,99	44	100,0	151	12	6	11990
12,00	44	100,0	151	12	6	12000
12,01	44	100,0	151	12	6	12010
12,02	44	100,0	151	12	6	12020
12,03	44	100,0	151	12	6	12030
12,04	44	100,0	151	12	6	12040
12,05	44	100,0	151	12	6	12050

P	●
M	
K	○
N	●
S	
H	
O	●

→ v. Page 84

- 1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 12 working days / Minimum order 3 pieces
- 2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 10 working days




This tool concept permits numerous tolerances.
Please refer to the table on → **page 101** for tolerances covered.
For xxxxx please indicate required Ø in the order
(e.g. Ø 8.05 mm → Article no. 40 430 08050)!

NC machine reamers, DIN 8093-2B

- ▲ 0.01 mm steps
- ▲ extremely irregular pitch
- ▲ PLGANG ≤ Ø 3.75 = 30° / > Ø 3.75 = 45°

- ▲ Ø 0.6–0.94 mm similar to DIN 8093-B
- ▲ Ø 0.95–3.75 mm with centres both ends
- ▲ Ø 3.76–12.05 mm with protected centres

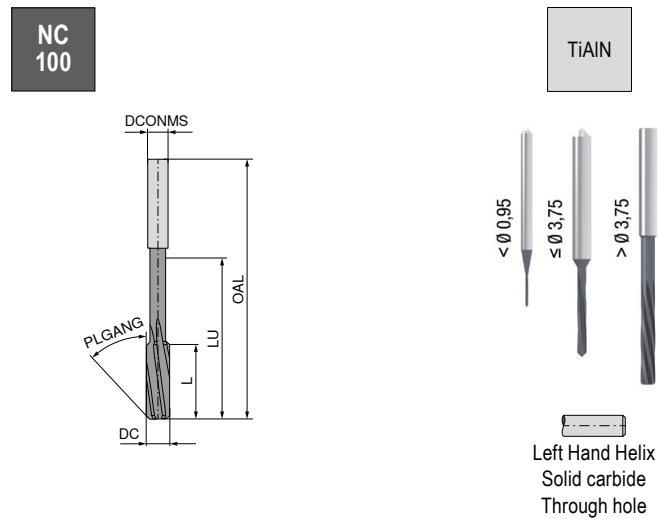

DC ^{+0,004} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
1,00	6	17,5	50	3	3	01000 ¹⁾
1,01	6	17,5	50	3	3	01010 ¹⁾
1,02	6	17,5	50	3	3	01020 ¹⁾
1,03	6	17,5	50	3	3	01030 ¹⁾
1,04 - 1,06	6	17,5	50	3	3	xxxxx ¹⁾
1,07 - 1,18	9	17,5	50	3	3	xxxxx ¹⁾
1,19 - 1,32	9	17,5	50	3	3	xxxxx ¹⁾
1,33 - 1,50	9	18,0	50	3	3	xxxxx ¹⁾
1,51 - 1,70	10	18,0	50	3	3	xxxxx ¹⁾
1,71 - 1,90	11	18,5	50	3	4	xxxxx ¹⁾
1,91 - 1,97	12	18,5	50	3	4	xxxxx ¹⁾
1,98	12	18,5	50	3	4	01980
1,99	12	18,5	50	3	4	01990
2,00	12	18,5	50	3	4	02000
2,01	12	18,5	50	3	4	02010
2,02	12	18,5	50	3	4	02020
2,03	12	18,5	50	3	4	02030
2,04 - 2,12	12	18,5	50	3	4	xxxxx ¹⁾
2,13 - 2,36	12	18,5	50	3	4	xxxxx ¹⁾
2,37 - 2,47	16	29,0	60	3	4	xxxxx ¹⁾
2,48	16	29,0	60	3	4	02480
2,49	16	29,0	60	3	4	02490
2,50	16	29,0	60	3	4	02500
2,51	16	29,0	60	3	4	02510
2,52	16	29,0	60	3	4	02520
2,53	16	29,0	60	3	4	02530
2,54 - 2,65	16	29,0	60	3	4	xxxxx ¹⁾
2,66 - 2,80	17	33,0	65	4	6	xxxxx ¹⁾
2,81 - 2,96	17	33,0	65	4	6	xxxxx ¹⁾
2,97	17	33,0	65	4	6	02970
2,98	17	33,0	65	4	6	02980
2,99	17	33,0	65	4	6	02990
3,00	17	33,0	65	4	6	03000
3,01	17	33,0	65	4	6	03010
3,02	17	33,0	65	4	6	03020
3,03	17	33,0	65	4	6	03030
3,04 - 3,35	18	33,0	65	4	6	xxxxx ¹⁾
3,36 - 3,75	18	43,0	75	4	6	xxxxx ¹⁾
3,76 - 3,96	19	43,0	75	4	6	xxxxx ¹⁾
3,97	19	43,0	75	4	6	03970
3,98	19	43,0	75	4	6	03980
3,99	19	43,0	75	4	6	03990
4,00	19	43,0	75	4	6	04000
4,01	19	43,0	75	4	6	04010
4,02	19	43,0	75	4	6	04020
4,03	19	43,0	75	4	6	04030
4,04 - 4,25	19	43,0	75	4	6	xxxxx ¹⁾
4,26 - 4,75	21	39,0	80	6	6	xxxxx ¹⁾
4,76 - 4,96	23	52,0	93	6	6	xxxxx ¹⁾
4,97	23	52,0	93	6	6	04970
4,98	23	52,0	93	6	6	04980

40 431 ...

DC ^{+0,004} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
4,99	23	52,0	93	6	6	04990
5,00	23	52,0	93	6	6	05000
5,01	23	52,0	93	6	6	05010
5,02	23	52,0	93	6	6	05020
5,03	23	52,0	93	6	6	05030
5,04 - 5,30	23	52,0	93	6	6	xxxxx ¹⁾
5,31 - 5,96	26	53,0	93	6	6	xxxxx ¹⁾
5,97	26	53,0	93	6	6	05970
5,98	26	53,0	93	6	6	05980
5,99	26	53,0	93	6	6	05990
6,00	26	53,0	93	6	6	06000
6,01	26	53,0	93	6	6	06010
6,02	26	53,0	93	6	6	06020
6,03	26	53,0	93	6	6	06030
6,04 - 6,70	28	61,0	101	6	6	xxxxx ¹⁾
6,71 - 7,50	31	68,0	109	8	6	xxxxx ¹⁾
7,51 - 7,96	33	77,0	117	8	6	xxxxx ¹⁾
7,97	33	77,0	117	8	6	07970
7,98	33	77,0	117	8	6	07980
7,99	33	77,0	117	8	6	07990
8,00	33	77,0	117	8	6	08000
8,01	33	77,0	117	8	6	08010
8,02	33	77,0	117	8	6	08020
8,03	33	77,0	117	8	6	08030
8,04	33	77,0	117	8	6	08040
8,05 - 8,50	33	77,0	117	8	6	xxxxx ¹⁾
8,51 - 9,04	36	80,0	125	10	6	xxxxx ¹⁾
9,05 - 9,50	36	80,0	125	10	6	xxxxx ¹⁾
9,51 - 9,96	38	88,0	133	10	6	xxxxx ¹⁾
9,97	38	88,0	133	10	6	09970
9,98	38	88,0	133	10	6	09980
9,99	38	88,0	133	10	6	09990
10,00	38	88,0	133	10	6	10000
10,01	38	88,0	133	10	6	10010
10,02	38	88,0	133	10	6	10020
10,03	38	88,0	133	10	6	10030
10,04	38	88,0	133	10	6	10040
10,05	38	88,0	133	10	6	10050
10,06 - 10,60	38	88,0	133	10	6	xxxxx ¹⁾
10,61 - 11,80	41	97,0	142	10	6	xxxxx ¹⁾
11,81 - 11,96	44	100,0	151	12	6	xxxxx ¹⁾
11,97	44	100,0	151	12	6	11970
11,98	44	100,0	151	12	6	11980
11,99	44	100,0	151	12	6	11990
12,00	44	100,0	151	12	6	12000
12,01	44	100,0	151	12	6	12010
12,02	44	100,0	151	12	6	12020
12,03	44	100,0	151	12	6	12030
12,04	44	100,0	151	12	6	12040
12,05	44	100,0	151	12	6	12050

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v. Page 84

1) Not available ex stock, articles are non-returnable and cannot be exchanged /
Delivery time 15 working days



This tool concept permits numerous tolerances.
Please refer to the table on → **page 101** for tolerances covered.
For xxxxx please indicate required Ø in the order
(e.g. Ø 8.05 mm → Article no. 40 431 08050)!

NC machine reamers, sim. DIN 8093-A

NC100 H							TiAlSiN	
							straight flute PLGANG 45° SIG 120° Solid carbide Through hole + blind hole	
							40 435 ...	
DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h5} mm	PLGL mm			
0,98	6	16	50	4	0,12		00980	
0,99	6	16	50	4	0,12		00990	
1,00	6	16	50	4	0,12		01000	
1,01	6	16	50	4	0,12		01010	
1,02	6	16	50	4	0,12		01020	
1,03	6	16	50	4	0,12		01030	
1,48	9	16	50	4	0,12		01480	
1,49	9	16	50	4	0,12		01490	
1,50	9	16	50	4	0,12		01500	
1,51	9	16	50	4	0,12		01510	
1,52	9	16	50	4	0,12		01520	
1,60	10	16	50	4	0,12		01600	
1,70	10	16	50	4	0,12		01700	
1,80	11	16	50	4	0,12		01800	
1,90	11	16	50	4	0,12		01900	
1,97	12	16	50	4	0,30		01970	
1,98	12	16	50	4	0,30		01980	
1,99	12	16	50	4	0,30		01990	
2,00	12	16	50	4	0,30		02000	
2,01	12	16	50	4	0,30		02010	
2,02	12	16	50	4	0,30		02020	
2,03	12	16	50	4	0,30		02030	
2,05	12	16	50	4	0,30		02050	
2,10	12	16	50	4	0,30		02100	
2,20	13	16	50	4	0,30		02200	
2,30	13	16	50	4	0,30		02300	
2,40	16	26	60	4	0,30		02400	
2,50	16	26	60	4	0,30		02500	
2,60	16	26	60	4	0,30		02600	
2,70	17	30	64	4	0,30		02700	
2,80	17	30	64	4	0,30		02800	
2,90	17	30	64	4	0,30		02900	
2,97	17	30	64	4	0,30		02970	
2,98	17	30	64	4	0,30		02980	
2,99	17	30	64	4	0,30		02990	
3,00	17	30	64	4	0,30		03000	
3,01	17	30	64	4	0,30		03010	
3,02	17	30	64	4	0,30		03020	
3,03	17	30	64	4	0,30		03030	
3,05	18	34	68	4	0,30		03050	
3,10	18	34	68	4	0,30		03100	
3,20	18	34	68	4	0,30		03200	
3,30	18	34	68	4	0,30		03300	
3,40	20	40	74	4	0,30		03400	
3,50	20	40	74	4	0,30		03500	
3,60	20	40	74	4	0,30		03600	
3,70	20	40	74	4	0,30		03700	
3,80	21	43	77	4	0,40		03800	
3,90	21	43	77	4	0,40		03900	
3,97	21	43	77	4	0,40		03970	
3,98	21	43	77	4	0,40		03980	


							40 435 ...	
DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h5} mm	PLGL mm			
3,99	21	43	77	4	0,40		03990	
4,00	21	43	77	4	0,40		04000	
4,01	21	43	77	4	0,40		04010	
4,02	21	43	77	4	0,40		04020	
4,03	21	43	77	4	0,40		04030	
4,05	21	40	82	6	0,40		04050	
4,10	21	40	82	6	0,40		04100	
4,20	21	40	82	6	0,40		04200	
4,30	23	40	82	6	0,40		04300	
4,40	23	40	82	6	0,40		04400	
4,50	23	40	82	6	0,40		04500	
4,60	23	40	82	6	0,40		04600	
4,70	23	40	82	6	0,40		04700	
4,80	26	51	93	6	0,50		04800	
4,90	26	51	93	6	0,50		04900	
4,97	26	51	93	6	0,50		04970	
4,98	26	51	93	6	0,50		04980	
4,99	26	51	93	6	0,50		04990	
5,00	26	51	93	6	0,50		05000	
5,01	26	51	93	6	0,50		05010	
5,02	26	51	93	6	0,50		05020	
5,03	26	51	93	6	0,50		05030	
5,05	26	51	93	6	0,50		05050	
5,10	26	51	93	6	0,50		05100	
5,20	26	51	93	6	0,50		05200	
5,30	26	51	93	6	0,50		05300	
5,40	26	51	93	6	0,50		05400	
5,50	26	51	93	6	0,50		05500	
5,60	26	51	93	6	0,50		05600	
5,70	26	51	93	6	0,50		05700	
5,80	26	51	93	6	0,50		05800	
5,90	26	51	93	6	0,50		05900	
5,97	26	51	93	6	0,50		05970	
5,98	26	51	93	6	0,50		05980	
5,99	26	51	93	6	0,50		05990	
6,00	26	51	93	6	0,50		06000	

P	○
M	○
K	○
N	○
S	○
H	●
O	●

→ v_c Page 85

This tool concept permits numerous tolerances.
Please refer to the table on → **page 101** for tolerances covered.
Intermediate dimensions available on request.

NC machine reamers, sim. DIN 8093-A

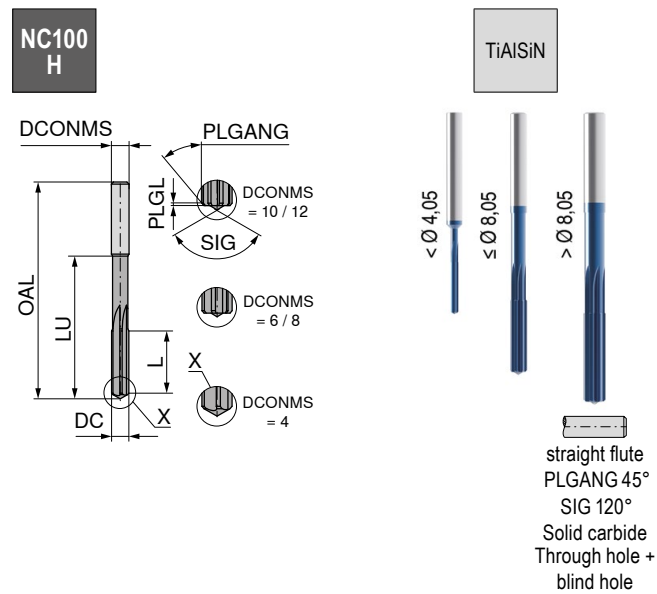

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h5} mm	PLGL mm	
6,01	26	51	93	6	0,5	06010
6,02	26	51	93	6	0,5	06020
6,03	26	51	93	6	0,5	06030
6,05	26	59	101	8	0,5	06050
6,10	26	59	101	8	0,5	06100
6,20	26	59	101	8	0,5	06200
6,30	26	59	101	8	0,5	06300
6,40	26	59	101	8	0,5	06400
6,50	26	59	101	8	0,5	06500
6,60	26	59	101	8	0,5	06600
6,70	26	59	101	8	0,5	06700
6,80	31	67	109	8	0,6	06800
6,85	31	67	109	8	0,6	06850
6,90	31	67	109	8	0,6	06900
7,00	31	67	109	8	0,6	07000
7,10	31	67	109	8	0,6	07100
7,20	31	67	109	8	0,6	07200
7,30	31	67	109	8	0,6	07300
7,40	31	67	109	8	0,6	07400
7,50	31	67	109	8	0,6	07500
7,60	31	67	109	8	0,6	07600
7,70	33	75	117	8	0,6	07700
7,80	33	75	117	8	0,6	07800
7,90	33	75	117	8	0,6	07900
7,97	33	75	117	8	0,6	07970
7,98	33	75	117	8	0,6	07980
7,99	33	75	117	8	0,6	07990
8,00	33	75	117	8	0,6	08000
8,01	33	75	117	8	0,7	08010
8,02	33	75	117	8	0,7	08020
8,03	33	75	117	8	0,7	08030
8,05	33	71	117	10	0,7	08050
8,10	33	71	117	10	0,7	08100
8,20	33	71	117	10	0,7	08200
8,30	33	71	117	10	0,7	08300
8,40	33	71	117	10	0,7	08400
8,50	33	71	117	10	0,7	08500
8,60	33	71	117	10	0,7	08600
8,70	36	79	125	10	0,7	08700
8,80	36	79	125	10	0,7	08800
8,90	36	79	125	10	0,7	08900
9,00	36	79	125	10	0,7	09000
9,10	36	79	125	10	0,7	09100
9,20	36	79	125	10	0,7	09200
9,30	36	79	125	10	0,7	09300
9,40	36	79	125	10	0,7	09400
9,50	36	79	125	10	0,7	09500
9,60	36	79	125	10	0,7	09600
9,70	38	87	133	10	0,7	09700
9,80	38	87	133	10	0,7	09800
9,90	38	87	133	10	0,7	09900

40 435 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h5} mm	PLGL mm	
9,97	41	87	133	10	0,7	09970
9,98	41	87	133	10	0,7	09980
9,99	41	87	133	10	0,7	09990
10,00	41	87	133	10	0,7	10000
10,01	41	87	133	10	0,7	10010
10,02	41	87	133	10	0,8	10020
10,03	41	87	133	10	0,8	10030
10,04	41	87	133	10	0,8	10040
10,05	41	87	133	10	0,8	10050
11,17	44	99	150	12	0,8	11170
11,97	44	99	150	12	0,8	11970
11,98	44	99	150	12	0,8	11980
11,99	44	99	150	12	0,8	11990
12,00	44	99	150	12	0,8	12000
12,01	44	99	150	12	0,8	12010
12,02	44	99	150	12	0,8	12020
12,03	44	99	150	12	0,8	12030
12,04	44	99	150	12	0,8	12040
12,05	44	99	150	12	0,8	12050


P	○
M	○
K	○
N	
S	
H	●
O	

→ v_c Page 85

This tool concept permits numerous tolerances.
Please refer to the table on → **page 101** for tolerances covered.
Intermediate dimensions available on request.

Machine reamers, similar to DIN 8093-A / -B

▲ extremely irregular pitch



NEW

NEW



40 415 ...							40 405 ...	
DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{H7} mm	ZEFP			
2,0	11	31	49	2,0	4	02000		02000
2,1	11	31	49	2,0	4	02100		02100
2,2	12	35	53	2,2	4	02200		02200
2,3	12	35	53	2,2	4	02300		02300
2,4	14	34	57	2,5	4	02400		02400
2,5	14	34	57	2,5	4	02500		02500
2,6	14	34	57	2,5	4	02600		02600
2,7	15	36	61	3,0	4	02700		02700
2,8	15	36	61	3,0	4	02800		02800
2,9	15	36	61	3,0	4	02900		02900
3,0	15	36	61	3,0	4	03000		03000
3,1	15	36	61	3,0	4	03100		03100
3,2	18	40	70	3,5	4	03200		03200
3,3	18	40	70	3,5	4	03300		03300
3,4	18	40	70	3,5	4	03400		03400
3,5	18	40	70	3,5	4	03500		03500
3,6	18	40	70	3,5	4	03600		03600
3,7	18	40	70	3,5	4	03700		03700
3,8	19	43	75	4,0	4	03800		03800
3,9	19	43	75	4,0	4	03900		03900
4,0	19	43	75	4,0	4	04000		04000
4,1	19	43	75	4,0	4	04100		04100
4,2	19	43	75	4,0	4	04200		04200
4,3	21	42	75	4,5	4	04300		04300
4,4	21	42	75	4,5	4	04400		04400
4,5	21	42	75	4,5	4	04500		04500
4,6	21	42	75	4,5	4	04600		04600
4,7	21	42	75	4,5	4	04700		04700
4,8	23	52	86	5,0	6	04800		04800
4,9	23	52	86	5,0	6	04900		04900
5,0	23	52	86	5,0	6	05000		05000
5,1	23	52	86	5,0	6	05100		05100
5,2	23	52	86	5,0	6	05200		05200
5,3	23	52	86	5,0	6	05300		05300
5,4	26	57	93	5,6	6	05400		05400
5,5	26	57	93	5,6	6	05500		05500
5,6	26	57	93	5,6	6	05600		05600
5,7	26	57	93	5,6	6	05700		05700
5,8	26	57	93	5,6	6	05800		05800
5,9	26	57	93	5,6	6	05900		05900
6,0	26	57	93	5,6	6	06000		06000
6,1	26	57	93	5,6	6	06100		06100
6,2	26	57	93	5,6	6	06200		06200
6,3	28	63	101	6,3	6	06300		06300
6,4	28	63	101	6,3	6	06400		06400
6,5	28	63	101	6,3	6	06500		06500
6,6	28	63	101	6,3	6	06600		06600
6,7	28	63	101	6,3	6	06700		06700
6,8	31	69	109	7,1	6	06800		06800
6,9	31	69	109	7,1	6	06900		06900
7,0	31	69	109	7,1	6	07000		07000
7,1	31	69	109	7,1	6	07100		07100

40 415 ...

40 405 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{H7} mm	ZEFP		
7,2	31	69	109	7,1	6	07200	07200
7,3	31	69	109	7,1	6	07300	07300
7,4	31	69	109	7,1	6	07400	07400
7,5	31	69	109	7,1	6	07500	07500
7,6	33	75	117	8,0	6	07600	07600
7,7	33	75	117	8,0	6	07700	07700
7,8	33	75	117	8,0	6	07800	07800
7,9	33	75	117	8,0	6	07900	07900
8,0	33	75	117	8,0	6	08000	08000
8,1	33	75	117	8,0	6	08100	08100
8,2	33	75	117	8,0	6	08200	08200
8,3	33	75	117	8,0	6	08300	08300
8,4	33	75	117	8,0	6	08400	08400
8,5	33	75	117	8,0	6	08500	08500
8,6	36	81	125	9,0	6	08600	08600
8,7	36	81	125	9,0	6	08700	08700
8,8	36	81	125	9,0	6	08800	08800
8,9	36	81	125	9,0	6	08900	08900
9,0	36	81	125	9,0	6	09000	09000
9,1	36	81	125	9,0	6	09100	09100
9,2	36	81	125	9,0	6	09200	09200
9,3	36	81	125	9,0	6	09300	09300
9,4	36	81	125	9,0	6	09400	09400
9,5	36	81	125	9,0	6	09500	09500
9,6	38	87	133	10,0	6	09600	09600
9,7	38	87	133	10,0	6	09700	09700
9,8	38	87	133	10,0	6	09800	09800
9,9	38	87	133	10,0	6	09900	09900
10,0	38	87	133	10,0	6	10000	10000
10,1	38	87	133	10,0	6	10100	10100
10,2	38	87	133	10,0	6	10200	10200
10,3	38	87	133	10,0	6	10300	10300
10,4	38	87	133	10,0	6	10400	10400
10,5	38	87	133	10,0	6	10500	10500
10,6	38	87	133	10,0	6	10600	10600
10,7	41	96	142	10,0	6	10700	10700
10,8	41	96	142	10,0	6	10800	10800
10,9	41	96	142	10,0	6	10900	10900
11,0	41	96	142	10,0	6	11000	11000
11,1	41	96	142	10,0	6	11100	11100
11,2	41	96	142	10,0	6	11200	11200
11,3	41	96	142	10,0	6	11300	11300
11,4	41	96	142	10,0	6	11400	11400
11,5	41	96	142	10,0	6	11500	11500
11,6	41	96	142	10,0	6	11600	11600
11,7	41	96	142	10,0	6	11700	11700
11,8	41	96	142	10,0	6	11800	11800
11,9	44	100	151	10,0	6	11900	11900
12,0	44	100	151	10,0	6	12000	12000

P	●	●
M		
K	○	○
N	●	●
S		
H		
O		


→ v. Page 86

NC machine reamers, DIN 212-3-B

▲ maximum radial run-out accuracy

▲ PLGANG $\leq \varnothing 3,75 = 30^\circ$ / $> \varnothing 3,75 = 45^\circ$

NC

Left Hand Helix
HSS-E
Through hole

40 110 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
1,5	8	15,5	40	2	3	015
1,6	9	16,0	43	2	3	016
1,7	9	16,0	43	2	3	017
1,8	10	19,0	46	2	4	018
1,9	10	19,0	46	2	4	019
2,0	11	21,0	49	2	4	020
2,1	11	21,0	49	2	4	021
2,2	12	22,0	53	3	4	022
2,3	12	22,0	53	3	4	023
2,4	14	26,0	57	3	4	024
2,5	14	26,0	57	3	4	025
2,6	14	26,0	57	3	4	026
2,7	15	30,0	61	3	6	027
2,8	15	30,0	61	3	6	028
2,9	15	30,0	61	3	6	029
3,0	15	30,0	61	3	6	030
3,1	16	34,0	65	4	6	031
3,2	16	34,0	65	4	6	032
3,3	16	34,0	65	4	6	033
3,4	18	39,0	70	4	6	034
3,5	18	39,0	70	4	6	035
3,6	18	39,0	70	4	6	036
3,7	18	39,0	70	4	6	037
3,8	19	44,0	75	4	6	038
3,9	19	44,0	75	4	6	039
4,0	19	44,0	75	4	6	040
4,1	19	44,0	75	4	6	041
4,2	19	44,0	75	4	6	042
4,3	21	48,0	80	5	6	043
4,4	21	48,0	80	5	6	044
4,5	21	48,0	80	5	6	045
4,6	21	48,0	80	5	6	046
4,7	21	48,0	80	5	6	047
4,8	23	54,0	86	5	6	048
4,9	23	54,0	86	5	6	049
5,0	23	54,0	86	5	6	050
5,1	23	54,0	86	5	6	051
5,2	23	54,0	86	5	6	052
5,3	23	54,0	86	5	6	053
5,4	26	53,0	93	6	6	054
5,5	26	53,0	93	6	6	055
5,6	26	53,0	93	6	6	056
5,7	26	53,0	93	6	6	057
5,8	26	53,0	93	6	6	058
5,9	26	53,0	93	6	6	059
6,0	26	53,0	93	6	6	060
6,1	28	61,0	101	6	6	061
6,2	28	61,0	101	6	6	062
6,3	28	61,0	101	6	6	063
6,4	28	61,0	101	6	6	064
6,5	28	61,0	101	6	6	065
6,6	28	61,0	101	6	6	066

40 110 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
6,7	28	61,0	101	6	6	067
6,8	31	69,0	109	8	6	068
6,9	31	69,0	109	8	6	069
7,0	31	69,0	109	8	6	070
7,1	31	69,0	109	8	6	071
7,2	31	69,0	109	8	6	072
7,3	31	69,0	109	8	6	073
7,4	31	69,0	109	8	6	074
7,5	31	69,0	109	8	6	075
7,6	33	77,0	117	8	6	076
7,7	33	77,0	117	8	6	077
7,8	33	77,0	117	8	6	078
7,9	33	77,0	117	8	6	079
8,0	33	77,0	117	8	6	080
8,1	33	77,0	117	8	6	081
8,2	33	77,0	117	8	6	082
8,3	33	77,0	117	8	6	083
8,4	33	77,0	117	8	6	084
8,5	33	77,0	117	8	6	085
8,6	36	81,0	125	10	6	086
8,7	36	81,0	125	10	6	087
8,8	36	81,0	125	10	6	088
8,9	36	81,0	125	10	6	089
9,0	36	81,0	125	10	6	090
9,1	36	81,0	125	10	6	091
9,2	36	81,0	125	10	6	092
9,3	36	81,0	125	10	6	093
9,4	36	81,0	125	10	6	094
9,5	36	81,0	125	10	6	095
9,6	38	89,0	133	10	6	096
9,7	38	89,0	133	10	6	097
9,8	38	89,0	133	10	6	098
9,9	38	89,0	133	10	6	099
10,0	38	89,0	133	10	6	100
11,0	41	98,0	142	10	6	110
12,0	44	106,0	151	10	6	120
13,0	44	106,0	151	10	6	130
14,0	47	110,0	160	14	8	140
15,0	50	112,0	162	14	8	150
16,0	52	120,0	170	14	8	160
17,0	54	125,0	175	14	8	170
18,0	56	132,0	182	14	8	180
19,0	58	136,0	189	16	8	190
20,0	60	142,0	195	16	8	200

P	●
M	
K	●
N	●
S	
H	
O	●

→ v_c Page 87


NC machine reamers, DIN 212-3-B

▲ 0.01 mm steps

▲ tolerance: Ø 1.00 – Ø 5.50 mm = +0.004 mm

▲ tolerance: Ø 5.51 – Ø 12.00 mm = +0.005 mm

▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC
100Left Hand Helix
HSS-E
Through hole

40 115 ...

DC mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
0,95 - 0,99	5,5	12,5	34	1	3	xxxxx ¹⁾
1,00	5,5	12,5	34	1	3	01000
1,01	5,5	12,5	34	1	3	01010
1,02	5,5	12,5	34	1	3	01020
1,03 - 1,06	5,5	12,5	34	1	3	xxxxx ¹⁾
1,07 - 1,18	6,5	13,0	36	1	3	xxxxx ¹⁾
1,19 - 1,32	7,5	14,0	38	2	3	xxxxx ¹⁾
1,33 - 1,41	8,0	15,5	40	2	3	xxxxx ¹⁾
1,42 - 1,49	8,0	15,5	40	2	3	xxxxx ¹⁾
1,50	8,0	15,5	40	2	3	01500
1,51	9,0	16,0	43	2	3	01510
1,52	9,0	16,0	43	2	3	01520
1,53 - 1,70	9,0	16,0	43	2	3	xxxxx ¹⁾
1,71 - 1,90	10,0	19,0	46	2	4	xxxxx ¹⁾
1,91 - 1,96	11,0	21,0	49	2	4	xxxxx ¹⁾
1,97	11,0	21,0	49	2	4	01970
1,98	11,0	21,0	49	2	4	01980
1,99	11,0	21,0	49	2	4	01990
2,00	11,0	21,0	49	2	4	02000
2,01	11,0	21,0	49	2	4	02010
2,02	11,0	21,0	49	2	4	02020
2,03 - 2,12	11,0	21,0	49	2	4	xxxxx ¹⁾
2,13 - 2,36	12,0	22,0	53	3	4	xxxxx ¹⁾
2,37 - 2,47	14,0	26,0	57	3	4	xxxxx ¹⁾
2,48	14,0	26,0	57	3	4	02480
2,49	14,0	26,0	57	3	4	02490
2,50	14,0	26,0	57	3	4	02500
2,51	14,0	26,0	57	3	4	02510
2,52	14,0	26,0	57	3	4	02520
2,53 - 2,65	14,0	26,0	57	3	4	xxxxx ¹⁾
2,66 - 2,96	15,0	30,0	61	3	6	xxxxx ¹⁾
2,97	15,0	30,0	61	3	6	02970
2,98	15,0	30,0	61	3	6	02980
2,99	15,0	30,0	61	3	6	02990
3,00	15,0	30,0	61	3	6	03000
3,01	15,0	30,0	61	3	6	03010
3,02	15,0	30,0	61	3	6	03020
3,03	15,0	30,0	61	3	6	03030 ¹⁾
3,04 - 3,35	16,0	34,0	65	4	6	xxxxx ¹⁾
3,36 - 3,75	18,0	39,0	70	4	6	xxxxx ¹⁾
3,76 - 3,96	19,0	44,0	75	4	6	xxxxx ¹⁾
3,97	19,0	44,0	75	4	6	03970
3,98	19,0	44,0	75	4	6	03980
3,99	19,0	44,0	75	4	6	03990
4,00	19,0	44,0	75	4	6	04000
4,01	19,0	44,0	75	4	6	04010
4,02	19,0	44,0	75	4	6	04020
4,03 - 4,25	19,0	44,0	75	4	6	xxxxx ¹⁾
4,26 - 4,75	21,0	48,0	80	5	6	xxxxx ¹⁾
4,76 - 4,96	23,0	54,0	86	5	6	xxxxx ¹⁾

40 115 ...

DC mm	L mm	LU mm	OAL mm	DCONMS _{h6} mm	ZEFP	
4,97	23,0	54,0	86	5	6	04970
4,98	23,0	54,0	86	5	6	04980
4,99	23,0	54,0	86	5	6	04990
5,00	23,0	54,0	86	5	6	05000
5,01	23,0	54,0	86	5	6	05010
5,02	23,0	54,0	86	5	6	05020
5,03 - 5,30	23,0	54,0	86	5	6	xxxxx ¹⁾
5,31 - 5,60	26,0	53,0	93	6	6	xxxxx ¹⁾
5,61 - 5,96	26,0	53,0	93	6	6	xxxxx ¹⁾
5,97	26,0	53,0	93	6	6	05970
5,98	26,0	53,0	93	6	6	05980
5,99	26,0	53,0	93	6	6	05990
6,00	26,0	53,0	93	6	6	06000
6,01	26,0	53,0	93	6	6	06010
6,02	26,0	53,0	93	6	6	06020
6,03	26,0	53,0	93	6	6	06030 ¹⁾
6,04 - 6,70	28,0	61,0	101	6	6	xxxxx ¹⁾
6,71 - 7,20	31,0	69,0	109	8	6	xxxxx ¹⁾
7,21 - 7,50	31,0	69,0	109	8	6	xxxxx ¹⁾
7,51 - 7,96	33,0	77,0	117	8	6	xxxxx ¹⁾
7,97	33,0	77,0	117	8	6	07970
7,98	33,0	77,0	117	8	6	07980
7,99	33,0	77,0	117	8	6	07990
8,00	33,0	77,0	117	8	6	08000
8,01	33,0	77,0	117	8	6	08010
8,02	33,0	77,0	117	8	6	08020
8,03 - 8,20	33,0	77,0	117	8	6	xxxxx ¹⁾
8,21 - 8,50	33,0	77,0	117	8	6	xxxxx ¹⁾
8,51 - 8,99	36,0	81,0	125	10	6	xxxxx ¹⁾
9,00	36,0	81,0	125	10	6	09000
9,01	36,0	81,0	125	10	6	09010
9,02	36,0	81,0	125	10	6	09020
9,03 - 9,20	36,0	81,0	125	10	6	xxxxx ¹⁾
9,21 - 9,50	36,0	81,0	125	10	6	xxxxx ¹⁾
9,51 - 9,96	38,0	89,0	133	10	6	xxxxx ¹⁾
9,97	38,0	89,0	133	10	6	09970
9,98	38,0	89,0	133	10	6	09980
9,99	38,0	89,0	133	10	6	09990
10,00	38,0	89,0	133	10	6	10000
10,01	38,0	89,0	133	10	6	10010
10,02	38,0	89,0	133	10	6	10020
10,03 - 10,20	38,0	89,0	133	10	6	xxxxx ¹⁾
10,21 - 10,60	38,0	89,0	133	10	6	xxxxx ¹⁾
10,61 - 11,20	41,0	98,0	142	10	6	xxxxx ¹⁾
11,21 - 11,80	41,0	98,0	142	10	6	xxxxx ¹⁾
11,81 - 11,96	44,0	106,0	151	10	6	xxxxx ¹⁾
11,97	44,0	106,0	151	10	6	11970
11,98	44,0	106,0	151	10	6	11980
11,99	44,0	106,0	151	10	6	11990
12,00	44,0	106,0	151	10	6	12000


P	●
M	
K	●
N	●
S	
H	
O	●

→ v. Page 87

1) Not available ex stock, articles are non-returnable and cannot be exchanged /
Delivery time 10 working days / Minimum order 5 piecesThis tool concept permits numerous tolerances.
Please refer to the table on → **page 101** for tolerances covered.
For xxxxx please indicate required Ø in the order
(e.g. Ø 8.03 mm → Article no. 40 115 08030)!

Machine reamers, DIN 212-B

N



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 150 ...

DC _{H7} mm	L mm	LU mm	OAL mm	DCONMS _{h9} mm	ZEFP
1,0	5,5	13	34	1,0	3
1,5	8,0	16	40	1,5	3
2,0	11,0	22	49	2,0	4
2,5	14,0	26	57	2,5	4
3,0	15,0	29	61	3,0	6
3,5	18,0	38	70	3,5	6
4,0	19,0	46	75	4,0	6
4,5	21,0	51	80	4,5	6
5,0	23,0	57	86	5,0	6
5,5	26,0	56	93	5,6	6
6,0	26,0	56	93	5,6	6
6,5	28,0	64	101	6,3	6
7,0	31,0	72	109	7,1	6
7,5	31,0	72	109	7,1	6
8,0	33,0	80	117	8,0	6
8,5	33,0	80	117	8,0	6
9,0	36,0	84	125	9,0	6
9,5	36,0	84	125	9,0	6
10,0	38,0	92	133	10,0	6
11,0	41,0	101	142	10,0	6
12,0	44,0	110	151	10,0	6
13,0	44,0	110	151	10,0	6
14,0	47,0	114	160	12,5	8
15,0	50,0	116	162	12,5	8
16,0	52,0	124	170	12,5	8
17,0	54,0	129	175	14,0	8
18,0	56,0	136	182	14,0	8
19,0	58,0	140	189	16,0	8
20,0	60,0	146	195	16,0	8

010
015
020
025
030
035
040
045
050
055
060
065
070
075
080
085
090
095
100
110
120
130
140
150
160
170
180
190
200

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88


All other diameters, tolerance classes and chamfers also available on request.

Machine reamers, DIN 212-B

▲ 0.01 mm steps

▲ tolerance: Ø 0.95 – 5.50 mm = +0.004 mm

▲ tolerance: Ø 5.51 – 12.00 mm = +0.005 mm

N
100

Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS _{h9} mm	ZEFP	
0,95 - 1,06	5,5	13	34	1,0	3	xxxxx ¹⁾
1,07 - 1,18	6,5	14	36	1,1	3	xxxxx ¹⁾
1,19 - 1,32	7,5	15	38	1,2	3	xxxxx ¹⁾
1,33 - 1,41	8,0	16	40	1,4	3	xxxxx ¹⁾
1,42 - 1,47	8,0	16	40	1,5	3	xxxxx ¹⁾
1,48	8,0	16	40	1,5	3	01480
1,49	8,0	16	40	1,5	3	01490
1,50	8,0	16	40	1,5	3	01500
1,51 - 1,70	9,0	18	43	1,6	3	xxxxx ¹⁾
1,71 - 1,90	10,0	20	46	1,8	4	xxxxx ¹⁾
1,91 - 1,97	11,0	22	49	2,0	4	xxxxx ¹⁾
1,98	11,0	22	49	2,0	4	01980
1,99	11,0	22	49	2,0	4	01990
2,00	11,0	22	49	2,0	4	02000
2,01	11,0	22	49	2,0	4	02010
2,02	11,0	22	49	2,0	4	02020
2,03	11,0	22	49	2,0	4	02030
2,04	11,0	22	49	2,0	4	02040
2,05	11,0	22	49	2,0	4	02050
2,06 - 2,09	11,0	22	49	2,0	4	xxxxx ¹⁾
2,10 - 2,12	11,0	22	49	2,0	4	xxxxx ¹⁾
2,13 - 2,36	12,0	24	53	2,2	4	xxxxx ¹⁾
2,37 - 2,49	14,0	26	57	2,5	4	xxxxx ¹⁾
2,50 - 2,59	14,0	26	57	2,5	4	xxxxx ¹⁾
2,60 - 2,65	14,0	26	57	2,5	4	xxxxx ¹⁾
2,66 - 2,80	15,0	30	61	2,8	6	xxxxx ¹⁾
2,81 - 2,94	15,0	29	61	3,0	6	xxxxx ¹⁾
2,95	15,0	29	61	3,0	6	02950 ¹⁾
2,96	15,0	29	61	3,0	6	02960 ¹⁾
2,97	15,0	29	61	3,0	6	02970
2,98	15,0	29	61	3,0	6	02980
2,99	15,0	29	61	3,0	6	02990
3,00	15,0	29	61	3,0	6	03000
3,01	16,0	33	65	3,2	6	03010
3,02	16,0	33	65	3,2	6	03020
3,03	16,0	33	65	3,2	6	03030
3,04	16,0	33	65	3,2	6	03040
3,05	16,0	33	65	3,2	6	03050
3,06	16,0	33	65	3,2	6	03060
3,07	16,0	33	65	3,2	6	03070
3,08 - 3,09	16,0	33	65	3,2	6	xxxxx ¹⁾
3,10 - 3,35	16,0	33	65	3,2	6	xxxxx ¹⁾
3,36 - 3,49	18,0	38	70	3,5	6	xxxxx ¹⁾
3,50 - 3,59	18,0	38	70	3,5	6	xxxxx ¹⁾
3,60 - 3,75	18,0	38	70	3,5	6	xxxxx ¹⁾
3,76 - 3,81	19,0	46	75	4,0	6	xxxxx ¹⁾
3,82 - 3,94	19,0	46	75	4,0	6	xxxxx ¹⁾
3,95	19,0	46	75	4,0	6	03950 ¹⁾
3,96	19,0	46	75	4,0	6	03960 ¹⁾
3,97	19,0	46	75	4,0	6	03970

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS _{h9} mm	ZEFP	
3,98	19,0	46	75	4,0	6	03980
3,99	19,0	46	75	4,0	6	03990
4,00	19,0	46	75	4,0	6	04000
4,01	19,0	46	75	4,0	6	04010
4,02	19,0	46	75	4,0	6	04020
4,03	19,0	46	75	4,0	6	04030
4,04	19,0	46	75	4,0	6	04040
4,05	19,0	46	75	4,0	6	04050
4,06	19,0	46	75	4,0	6	04060
4,07	19,0	46	75	4,0	6	04070
4,08	19,0	46	75	4,0	6	04080
4,09 - 4,20	19,0	46	75	4,0	6	xxxxx ¹⁾
4,21 - 4,25	19,0	46	75	4,0	6	xxxxx ¹⁾
4,26 - 4,75	21,0	51	80	4,5	6	xxxxx ¹⁾
4,76 - 4,95	23,0	57	86	5,0	6	xxxxx ¹⁾
4,96	23,0	57	86	5,0	6	04960 ¹⁾
4,97	23,0	57	86	5,0	6	04970
4,98	23,0	57	86	5,0	6	04980
4,99	23,0	57	86	5,0	6	04990
5,00	23,0	57	86	5,0	6	05000
5,01	23,0	57	86	5,0	6	05010
5,02	23,0	57	86	5,0	6	05020
5,03	23,0	57	86	5,0	6	05030
5,04	23,0	57	86	5,0	6	05040
5,05	23,0	57	86	5,0	6	05050
5,06	23,0	57	86	5,0	6	05060
5,07	23,0	57	86	5,0	6	05070
5,08 - 5,20	23,0	57	86	5,0	6	xxxxx ¹⁾
5,21 - 5,30	23,0	57	86	5,0	6	xxxxx ¹⁾
5,31 - 5,94	26,0	56	93	5,6	6	xxxxx ¹⁾
5,95	26,0	56	93	5,6	6	05950 ¹⁾
5,96	26,0	56	93	5,6	6	05960 ¹⁾
5,97	26,0	56	93	5,6	6	05970
5,98	26,0	56	93	5,6	6	05980
5,99	26,0	56	93	5,6	6	05990

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v. Page 88

1) Not available ex stock, articles are non-returnable and cannot be exchanged /
Delivery time 16 working days



This tool concept permits numerous tolerances.
For achievable tolerances covered, please see the table on → page 101.
For xxxxx please indicate required Ø in the order
(e.g. Ø 10.06 mm → Article no. 40 140 10060)!




All other diameters, tolerance classes and chamfers also available on request.

Machine reamers, DIN 212-B

▲ 0.01 mm steps

▲ tolerance: Ø 0.95 – 5.50 mm = +0.004 mm

▲ tolerance: Ø 5.51 – 12.00 mm = +0.005 mm

N
100

Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS _{h9} mm	ZEFP	
6,00	26	56	93	5,6	6	06000
6,01	28	64	101	6,3	6	06010
6,02	28	64	101	6,3	6	06020
6,03	28	64	101	6,3	6	06030
6,04	28	64	101	6,3	6	06040
6,05	28	64	101	6,3	6	06050
6,06 - 6,11	28	64	101	6,3	6	xxxxx ¹⁾
6,12 - 6,34	28	64	101	6,3	6	xxxxx ¹⁾
6,35	28	64	101	6,3	6	06350
6,36 - 6,70	28	64	101	6,3	6	xxxxx ¹⁾
6,71 - 6,94	31	72	109	7,1	6	xxxxx ¹⁾
6,95	31	72	109	7,1	6	06950 ¹⁾
6,96	31	72	109	7,1	6	06960 ¹⁾
6,97	31	72	109	7,1	6	06970 ¹⁾
6,98	31	72	109	7,1	6	06980 ¹⁾
6,99	31	72	109	7,1	6	06990 ¹⁾
7,00	31	72	109	7,1	6	07000 ¹⁾
7,01	31	72	109	7,1	6	07010 ¹⁾
7,02	31	72	109	7,1	6	07020 ¹⁾
7,03	31	72	109	7,1	6	07030 ¹⁾
7,04 - 7,50	31	72	109	7,1	6	xxxxx ¹⁾
7,51 - 7,94	33	80	117	8,0	6	xxxxx ¹⁾
7,95	33	80	117	8,0	6	07950 ¹⁾
7,96	33	80	117	8,0	6	07960 ¹⁾
7,97	33	80	117	8,0	6	07970
7,98	33	80	117	8,0	6	07980
7,99	33	80	117	8,0	6	07990
8,00	33	80	117	8,0	6	08000
8,01	33	80	117	8,0	6	08010
8,02	33	80	117	8,0	6	08020
8,03	33	80	117	8,0	6	08030
8,04	33	80	117	8,0	6	08040
8,05	33	80	117	8,0	6	08050
8,06 - 8,20	33	80	117	8,0	6	xxxxx ¹⁾
8,21 - 8,50	33	80	117	8,0	6	xxxxx ¹⁾
8,51 - 8,63	36	84	125	9,0	6	xxxxx ¹⁾
8,64 - 8,95	36	84	125	9,0	6	xxxxx ¹⁾
8,96	36	84	125	9,0	6	08960 ¹⁾
8,97	36	84	125	9,0	6	08970 ¹⁾
8,98	36	84	125	9,0	6	08980 ¹⁾
8,99	36	84	125	9,0	6	08990 ¹⁾
9,00	36	84	125	9,0	6	09000 ¹⁾
9,01	36	84	125	9,0	6	09010 ¹⁾
9,02	36	84	125	9,0	6	09020 ¹⁾
9,03 - 9,50	36	84	125	9,0	6	xxxxx ¹⁾
9,51 - 9,63	38	92	133	10,0	6	xxxxx ¹⁾
9,64 - 9,95	38	92	133	10,0	6	xxxxx ¹⁾
9,96	38	92	133	10,0	6	09960 ¹⁾
9,97	38	92	133	10,0	6	09970
9,98	38	92	133	10,0	6	09980

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS _{h9} mm	ZEFP	
9,99	38	92	133	10,0	6	09990
10,00	38	92	133	10,0	6	10000
10,01	38	92	133	10,0	6	10010
10,02	38	92	133	10,0	6	10020
10,03	38	92	133	10,0	6	10030
10,04	38	92	133	10,0	6	10040
10,05	38	92	133	10,0	6	10050
10,06 - 10,09	38	92	133	10,0	6	xxxxx ¹⁾
10,10	38	92	133	10,0	6	10100
10,11 - 10,19	38	92	133	10,0	6	xxxxx ¹⁾
10,20	38	92	133	10,0	6	10200
10,21 - 10,60	38	92	133	10,0	6	xxxxx ¹⁾
10,61 - 11,20	41	101	142	10,0	6	xxxxx ¹⁾
11,21 - 11,80	41	101	142	10,0	6	xxxxx ¹⁾
11,81 - 11,95	44	110	151	10,0	6	xxxxx ¹⁾
11,96	44	110	151	10,0	6	11960 ¹⁾
11,97	44	110	151	10,0	6	11970
11,98	44	110	151	10,0	6	11980
11,99	44	110	151	10,0	6	11990
12,00	44	110	151	10,0	6	12000
12,01 - 12,05	44	110	151	10,0	6	xxxxx ¹⁾

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v. Page 88

1) Not available ex stock, articles are non-returnable and cannot be exchanged /
Delivery time 16 working days




This tool concept permits numerous tolerances.
For achievable tolerances covered, please see the table on → page 101.
For xxxxx please indicate required Ø in the order
(e.g. Ø 10.06 mm → Article no. 40 140 10060)!



All other diameters, tolerance classes and chamfers also available on request.

Stub reamers, DIN 8089-B

AR



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 145 ...

DC _{H7} mm	L mm	OAL mm	DCONMS _{h8} mm	ZEFP	
4	20	56	3,55	6	040
5	22	63	4,00	6	050
6	22	63	5,00	6	060
8	25	71	6,30	6	080
10	25	71	8,00	6	100
12	28	80	10,00	6	120
14	32	90	12,50	8	140
16	32	90	12,50	8	160
18	36	100	16,00	8	180
20	36	100	16,00	8	200
P					●
M					○
K					●
N					●
S					○
H					
O					●

→ v_c Page 88


 All other diameters, tolerance classes and chamfers also available on request.

Stub reamers, DIN 8089-B

▲ 0.01 mm steps

▲ tolerance: Ø 3.76 – 5.50 mm = +0.004 mm

▲ tolerance: Ø 5.51 – 12.00 mm = +0.005 mm

AR
100Left Hand Helix
PLGANG 45°
HSS-E
Through hole

DC mm	L mm	OAL mm	DCONMS _{h8} mm	ZEFP
3,76 - 3,81	20	56	3,55	6
3,82 - 3,94	20	56	3,55	6
3,95	20	56	3,55	6
3,96	20	56	3,55	6
3,97	20	56	3,55	6
3,98	20	56	3,55	6
3,99	20	56	3,55	6
4,00	20	56	3,55	6
4,01	20	56	3,55	6
4,02	20	56	3,55	6
4,03 - 4,20	20	56	3,55	6
4,21 - 4,25	20	56	3,55	6
4,26 - 4,75	22	63	4,00	6
4,76 - 4,94	22	63	4,00	6
4,95	22	63	4,00	6
4,96	22	63	4,00	6
4,97	22	63	4,00	6
4,98	22	63	4,00	6
4,99	22	63	4,00	6
5,00	22	63	4,00	6
5,01	22	63	4,00	6
5,02	22	63	4,00	6
5,03	22	63	4,00	6
5,04	22	63	4,00	6
5,05	22	63	4,00	6
5,06 - 5,20	22	63	4,00	6
5,21 - 5,30	22	63	4,00	6
5,31 - 5,70	22	63	5,00	6
5,71 - 5,94	22	63	5,00	6
5,95	22	63	5,00	6
5,96	22	63	5,00	6
5,97	22	63	5,00	6
5,98	22	63	5,00	6
5,99	22	63	5,00	6
6,00	22	63	5,00	6
6,01	22	63	5,00	6
6,02	22	63	5,00	6
6,03 - 6,11	22	63	5,00	6
6,12 - 6,70	22	63	5,00	6
6,71 - 6,94	25	71	6,30	6
6,95	25	71	6,30	6
6,96	25	71	6,30	6
6,97	25	71	6,30	6
6,98	25	71	6,30	6
6,99	25	71	6,30	6
7,00	25	71	6,30	6
7,01	25	71	6,30	6
7,02	25	71	6,30	6
7,03 - 7,25	25	71	6,30	6
7,26 - 7,94	25	71	6,30	6
7,95	25	71	6,30	6
7,96	25	71	6,30	6

40 139 ...

DC mm	L mm	OAL mm	DCONMS _{h8} mm	ZEFP
7,97	25	71	6,30	6
7,98	25	71	6,30	6
7,99	25	71	6,30	6
8,00	25	71	6,30	6
8,01	25	71	6,30	6
8,02	25	71	6,30	6
8,03	25	71	6,30	6
8,04	25	71	6,30	6
8,05 - 8,20	25	71	6,30	6
8,21 - 8,50	25	71	6,30	6
8,51 - 8,94	25	71	8,00	6
8,95	25	71	8,00	6
8,96	25	71	8,00	6
8,97	25	71	8,00	6
8,98	25	71	8,00	6
8,99	25	71	8,00	6
9,00	25	71	8,00	6
9,01	25	71	8,00	6
9,02	25	71	8,00	6
9,03 - 9,25	25	71	8,00	6
9,26 - 9,94	25	71	8,00	6
9,95	25	71	8,00	6
9,96	25	71	8,00	6
9,97	25	71	8,00	6
9,98	25	71	8,00	6
9,99	25	71	8,00	6
10,00	25	71	8,00	6
10,01	25	71	8,00	6
10,02	25	71	8,00	6
10,03 - 10,20	25	71	8,00	6
10,21 - 10,60	25	71	8,00	6
10,61 - 11,20	28	80	10,00	6
11,21 - 11,25	28	80	10,00	6
11,26 - 11,94	28	80	10,00	6
11,95	28	80	10,00	6
11,96	28	80	10,00	6
11,97	28	80	10,00	6
11,98	28	80	10,00	6
11,99	28	80	10,00	6
12,00	28	80	10,00	6

P	●
M	○
K	●
N	●
S	○
H	○
O	●

→ v. Page 88


1) Not available ex stock, articles are non-returnable and cannot be exchanged /
Delivery time 16 working daysThis tool concept permits numerous tolerances.
For achievable tolerances covered, please see the table on → page 101.
For xxxxx please indicate required Ø in the order
(e.g. Ø 10.06 mm → Article no. 40 139 10060)!

All other diameters, tolerance classes and chamfers also available on request.

Machine reamers HSS-E DIN 208

▲ the circular land on the cutting edge burnishes the hole and guides the reamer

N



DC _{H7} mm	L mm	LU mm	OAL mm	MK	ZEFP
16	52	127	210	2	8
17	54	132	214	2	8
18	56	137	219	2	8
19	58	142	223	2	8
20	60	147	228	2	8
21	62	151	232	2	8
22	64	156	237	2	8
23	66	160	241	2	8
24	68	167	268	3	8
25	68	167	268	3	8
26	70	172	273	3	8
27	71	177	277	3	10
28	71	177	277	3	10
29	73	181	281	3	10
30	73	181	281	3	10
32	77	190	317	4	10
34	78	194	321	4	10
35	78	195	321	4	10
36	79	200	325	4	10
38	81	204	329	4	10
40	81	204	329	4	10
42	82	211	333	4	12
44	83	215	336	4	12
50	86	224	344	4	12

40 160 ...


P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

Hand reamers, DIN 206-B

▲ PLGANG ≤ Ø 3,5 = 30°; > Ø 3,5 = 45°/30°

H



40 100 ...

DC _{H7} mm	L mm	OAL mm	DRVS mm	DCONMS mm	ZEFP
3,0	31	62	2,24	3,0	6
3,2	33	66	2,50	3,2	6
3,5	35	71	2,80	3,5	6
4,0	38	76	3,15	4,0	6
4,5	41	81	3,55	4,5	6
5,0	44	87	4,00	5,0	6
5,5	47	93	4,50	5,5	6
6,0	47	93	4,50	6,0	6
7,0	54	107	5,60	7,0	6
8,0	58	115	6,30	8,0	6
9,0	62	124	7,10	9,0	6
10,0	66	133	8,00	10,0	6
11,0	71	142	9,00	11,0	6
12,0	76	152	10,00	12,0	6
13,0	76	152	10,00	13,0	6
14,0	81	163	11,20	14,0	8
15,0	81	163	11,20	15,0	8
16,0	87	175	12,50	16,0	8
17,0	87	175	14,00	17,0	8
18,0	93	188	14,00	18,0	8
19,0	93	188	14,00	19,0	8
20,0	100	201	16,00	20,0	8
22,0	107	215	18,00	22,0	8
24,0	115	231	20,00	24,0	8
25,0	115	231	20,00	25,0	8
26,0	115	231	20,00	26,0	8
28,0	124	247	22,40	28,0	10
30,0	124	247	22,40	30,0	10


P	●
M	○
K	●
N	●
S	○
H	
O	●



All other diameters, tolerance classes and chamfers also available on request.

Insert countersink 180°

Scope of supply:
Indexable insert countersink including clamping screws



NEW



SIG 180°


30 198 ...

DC mm	PHD mm	ZEFP	ZNF	DCONMS mm	LU mm	OAL mm	Insert	
10	5,3	1	1	16	10	80	WOEX 030204	01000 ¹⁾
11	6,4	1	1	16	11	80	WOEX 030204	01100 ¹⁾
15	8,4	1	1	16	15	80	WOEX 05T304	01500
18	10,4	1	1	16	18	80	WOEX 05T304	01800
20	13,0	1	1	25	20	100	WOEX 05T304	02000
24	15,0	2	2	25	24	100	WOEX 05T304	02400
26	17,0	2	2	25	26	100	WOEX 05T304	02600
30	19,0	2	2	25	30	100	WOEX 06T304	03000
33	21,0	2	2	25	33	100	WOEX 080404	03300
36	21,0	2	2	25	36	100	WOEX 080404	03600
40	25,0	2	2	25	40	100	WOEX 080404	04000
48	28,0	2	2	32	48	120	WOEX 100504	04800

1) Without Through Coolant

Spare parts
DC

10 - 11	T06 - IP	123	M2,0x4,3 - 06IP	10000
15 - 26	T08 - IP	125	M2,5x7,2 - 08IP	10500
30	T10 - IP	127	M3,5x7,3 - 10IP	10600
33 - 48	T15 - IP	128	M4,5x9 - 15IP	12700



Key D




Clamping screw

80 950 ...

10 950 ...

WOEX

Designation	L mm	IC mm	S mm	D1 mm
WOEX 0302..	3,2	5	2,30	2,30
WOEX 05T3..	5,3	8	3,80	2,85
WOEX 06T3..	6,6	10	3,80	4,05
WOEX 0804..	7,9	12	4,80	4,90
WOEX 1005..	9,9	15	5,30	4,90



WOEX

		-01 K10		-01 BK8425	
					
		WOEX 10 821 ...		WOEX 10 821 ...	
ISO	RE mm				
030204	0,4	35301		30301	
05T304	0,4	35501		30501	
06T304	0,4	35601		30601	
080404	0,4	35801		30801	
100504	0,4	36001		31001	
P				●	
M				●	
K				●	
N		●		○	
S		●		●	
H				○	
O		●			


→ v_c Page 89

Indexable chamfer milling 90°

Scope of supply:

Indexable insert countersink including clamping screws

WPS



30 196 ...

DCX mm	DCN mm	PHD mm	ZEFP	ZNF	DCONMS mm	OAL mm	Insert	
19	7	9,5	2	2	16	100	TOHX 090204	19000
23	11	12,0	2	2	16	100	TOHX 090204	23000
26	11	12,0	1	2	16	100	TOHX 090204	26000
30	12	13,0	2	2	20	100	TOHX 140305	30000
34	16	17,0	2	2	20	100	TOHX 140305	34000
37	19	20,0	2	2	20	100	TOHX 140305	37000



TORX® Screws



Key D

62 950 ...

80 950 ...

Spare parts


DCX

19 - 26	M2,6x6,2 - 08IP	09900	T08 - IP	125
30 - 37	M3,5x7,3 - 10IP	12600	T10 - IP	127

Indexable chamfer milling 60°

Scope of supply:
Indexable insert countersink including clamping screws

WPS



30 197 ...
16500
20000
22000
23500
25500

DCX mm	DCN mm	PHD mm	ZEFP	ZNF	DCONMS mm	OAL mm	Insert
16,5	8,1	8,5	1	1	16	100	TOHX 090204
20,0	11,6	12,0	2	2	16	100	TOHX 090204
22,0	13,6	14,0	2	2	16	100	TOHX 090204
23,5	15,1	15,5	2	2	16	100	TOHX 090204
25,5	17,1	17,5	2	2	16	100	TOHX 090204



TORX® Screws



Key D

Spare parts
DCX


16,5 - 22	M2,6x5,2 - 08IP	12000	T08 - IP	125
23,5 - 25,5	M2,6x6,2 - 08IP	09900	T08 - IP	125

62 950 ...

80 950 ...

TOHX

Designation	L mm	IC mm	S mm	D1 mm
TOHX 0902..	9,12	5,6	2,50	2,8
TOHX 1403..	13,62	8,2	3,00	3,8



TOHX

		-G06 BK8425	-U877 BK8425	-G12 BK8425
		F TOHX	F TOHX	F TOHX
		62 602 ...	62 604 ...	62 603 ...
ISO	RE mm			
090204EN	0,4		31400	31400
140305EN	0,5	33000		
P		•	•	•
M		•	•	•
K		•	•	•
N		○	○	○
S		•	•	•
H		○	○	○
O				

→ v_c Page 89

TOHX

		-U877 K10	-G12 K10
		F TOHX	F TOHX
		62 604 ...	62 603 ...
ISO	RE mm		
090204EN	0,4	51400	
090204FN	0,4		51600
140305FN	0,5		52800
P			
M			
K			
N		•	•
S		•	•
H			
O		•	•



→ v_c Page 89

Counterbore, DIN 373

▲ with fixed pilot

▲ with 3 cutting edges, right-hand flutes for counterbores according to DIN 74

▲ for countersinking to suit hexagon socket screws according to DIN 912, DIN 6912, DIN 7984 and cap screws according to DIN 84

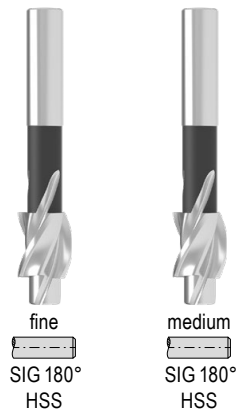

Thread	DC_2 _{z9} mm	DCONMS _{h9} mm	OAL mm	DC_1 _{e8} mm	30 190 ...	30 191 ...
M3	6	5,0	71	3,2	030 ¹⁾	030 ¹⁾
M3	6	5,0	71	3,4		
M4	8	5,0	71	4,3	040 ¹⁾	040 ¹⁾
M4	8	5,0	71	4,5		
M5	10	8,0	80	5,3	050 ¹⁾	050 ¹⁾
M5	10	8,0	80	5,5		
M6	11	8,0	80	6,4	060 ¹⁾	060 ¹⁾
M6	11	8,0	80	6,6		
M8	15	12,5	100	8,4	080 ¹⁾	080 ¹⁾
M8	15	12,5	100	9,0		
M10	18	12,5	100	10,5	100 ¹⁾	100 ¹⁾
M10	18	12,5	100	11,0		
M12	20	12,5	100	13,0	120	120
M12	20	12,5	100	13,5		
P					●	●
M					●	●
K					●	●
N					●	●
S					○	○
H						
O					●	●

1) Included in the set

→ v_c Page 94

Counterbore, DIN 373 – Set

Scope of supply:


Counterbores M3; M4; M5; M6; M8; M10 in case



30 190 ...	30 191 ...
999	999

Countersink 90° with irregular pitch, DIN 335-C

- ▲ all sizes with 3 cutting edges and highly irregular pitch, resulting in smooth running, excellent roundness and chatter reduction giving the highest surface quality
- ▲ special HPC-TiN coating
- ▲ for very high tool life in almost all materials
- ▲ greatly reduced axial and radial forces
- ▲ for countersinking to DIN 7991



SIG 90°
Solid carbide

30 117 ...

DC_2 _{z9} mm	DC_1 mm	DCONMS _{h9} mm	OAL mm	DIN 7991
6,3	1,5	5	45	M3
8,3	2,0	6	50	M4
10,4	2,5	6	50	M5
12,4	2,8	8	56	M6
16,5	3,2	10	60	M8
20,5	3,5	10	60	M10
25,0	3,8	10	67	M12
31,0	4,2	12	71	M16

06300
08300
10400 ¹⁾
12400
16500 ¹⁾
20500
25000 ¹⁾
31000

P	●
M	○
K	●
N	●
S	○
H	○
O	○

1) Included in the set

Countersink 90° with irregular pitch, DIN 335-C – Set

Scope of supply:

Countersinks Ø 10.4 / 16.5 / 25.0 mm in storage case




30 117 ...

99900

Countersink 60° factory standard-C

▲ with 3 cutting edges for countersinking and deburring in high-tensile steels, grey cast iron, aluminium alloys containing silicon and corrosion resistant steels.

N



SIG 60°

Solid carbide

30 160 ...

DC_2 _{z9} mm	DC_1 mm	DCONMS _{h9} mm	OAL mm	
12,5	3,2	8	56	125
16,0	4,0	10	63	160
20,0	5,0	10	67	200
25,0	6,3	10	71	250


P	●
M	○
K	●
N	●
S	○
H	○
O	

→ v_c Page 90

Countersink 90° factory standard-C

▲ with 3 cutting edges for countersinking and deburring in high-tensile steels, grey cast iron, aluminium alloys containing silicon and corrosion resistant steels.

N



SIG 90°

Solid carbide

30 115 ...

DC_2 _{z9} mm	DC_1 mm	DCONMS _{h9} mm	OAL mm	DIN ISO 7721	DIN 7991	
10,4	2,5	8	46	M5		100
12,4	2,8	8	56		M6	124
15,0	3,2	10	60	M8		150
16,5	3,2	10	60		M8	165
20,5	3,5	10	63		M10	205
25,0	3,8	10	67		M12	250
31,0	4,2	12	71		M16	310


P	●
M	○
K	●
N	●
S	○
H	○
O	

→ v_c Page 90

Countersink 90° with irregular pitch, DIN 335-C

- ▲ all sizes with 3 cutting edges and highly irregular pitch, resulting in smooth running, excellent roundness and chatter reduction giving the highest surface quality
- ▲ for very high tool life in almost all materials
- ▲ greatly reduced axial and radial forces
- ▲ for countersinking to DIN ISO 7721 and DIN 7991

N



NEW

TiN

SIG 90°
HSS

30 141 ...

DC_2 _{z9} mm	DC_1 mm	DCONMS _{h9} mm	OAL mm	DIN ISO 7721	DIN 7991	
4,3	1,3	4	40	M2		04300
6,0	1,5	5	45	M3		06000
6,3	1,5	5	45		M3	06300
8,0	2,0	6	50	M4		08000
8,3	2,0	6	50		M4	08300
10,0	2,5	6	50	M5		10000
10,4	2,5	6	50		M5	10400 ¹⁾
11,5	2,8	8	56	M6		11500
12,4	2,8	8	56		M6	12400
15,0	3,2	10	60	M8		15000
16,5	3,2	10	60		M8	16500 ¹⁾
19,0	3,5	10	63	M10		19000
20,5	3,5	10	63		M10	20500
23,0	3,8	10	67	M12		23000
25,0	3,8	10	67		M12	25000 ¹⁾
31,0	4,2	12	71		M16	31000

P	●
M	○
K	●
N	●
S	○
H	○
O	○

1) Included in the set

→ v_c Page 91

Countersink 90° with irregular pitch, DIN 335-C – Set

Scope of supply:

Countersinks Ø 10.4 / 16.5 / 25.0 mm in storage case

N



NEW


TiN

30 141 ...

99900

Countersink 90°, DIN 335-C

- ▲ 3 cutting edges to avoid burrs and chatter marks when countersinking and deburring in virtually all materials. Particularly suitable for DIN screws according to DIN ISO 7721 and 7991, as the countersink diameters are matched to the heads of these screws.
- ▲ the TiN version makes high cutting rates possible; very long tool life and very good friction resistance properties in order to avoid material sticking.
- ▲ TiAlN version shows considerably improved performance compared to TiN version. Particularly suitable for all abrasive materials (cast iron, AlSi) and/or at high temperature.



				N		N		N		VA		AL	
						TiN		TiAlN		TiAlN			
				SIG 90° HSS		SIG 90° HSS		SIG 90° HSS		SIG 90° HSS		SIG 90° HSS	
				30 100 ...		30 110 ...		30 130 ...		30 132 ...		30 102 ...	
DC_2 ²⁹ mm	DC_1 mm	DCONMS mm	OAL mm	DIN ISO 7721	DIN 7991								
4,3	1,3	4	40	M2		043							
5,0	1,5	4	40	M2,5		050							
6,0	1,5	5	45	M3		060							
6,3	1,5	5	45		M3	063 ¹⁾	063 ¹⁾	063		063		063	
7,0	1,8	6	50	M3,5		070							
8,0	2,0	6	50	M4		080							
8,3	2,0	6	50		M4	083 ¹⁾	083 ¹⁾	080		083		083	
9,4	2,2	6	50			094							
10,0	2,5	6	50	M5		100							
10,4	2,5	6	50		M5	104 ¹⁾	104 ¹⁾	100		104		104	
11,5	2,8	8	56	M6		115							
12,4	2,8	8	56		M6	124 ¹⁾	124 ¹⁾	124		124		124	
13,4	2,9	8	56			134							
15,0	3,2	10	60	M8		150							
16,5	3,2	10	60		M8	165 ¹⁾	165 ¹⁾	150		165		150	
19,0	3,5	10	63	M10		190							
20,5	3,5	10	63		M10	205 ¹⁾	205 ¹⁾	205		205		205	
23,0	3,8	10	67	M12		230							
25,0	3,8	10	67		M12	250				250		250	
31,0	4,2	12	71		M16	310				310		310	
31,0	4,2	12	67		M16								
P						●	●	●	○	○	○	○	○
M						○	○	○	●	●	●	○	○
K						●	●	●	○	○	○	○	○
N						●	●	●	○	○	○	●	●
S						○	○	○	○	○	○	○	○
H							○	○	○	○	○		
O						●	●	●	●	●	●	●	●

1) Included in the set

→ v_c Page 92+93

Countersink 90°, DIN 335-C – set

Scope of supply:


Countersinks Ø 6,3; 8,3; 10,4; 12,4; 16,5; 20,5 in case



		TiN	
		30 100 ...	
		30 110 ...	
		999	999

Countersink 60°, DIN 334-C

▲ 3 cutting edges for countersinking and deburring in virtually all materials

SIG 60°
HSS

30 150 ...

DC_2 _{z9} mm	DC_1 mm	DCONMS _{h9} mm	OAL mm	
6,3	1,6	5	45	063 ¹⁾
8,0	2,0	6	50	080 ¹⁾
10,0	2,5	6	52	100 ¹⁾
12,5	3,2	8	56	125 ¹⁾
16,0	4,0	10	63	160 ¹⁾
20,0	5,0	10	67	200 ¹⁾
25,0	6,3	10	71	250

P	●
M	○
K	●
N	●
S	○
H	
O	●


1) Included in the set

→ v_c Page 94

Countersink 90°, DIN 335-C

▲ 3 cutting edges to avoid burrs and chatter marks when countersinking and deburring in virtually all materials. Particularly suitable for DIN screws according to DIN ISO 7721 and 7991, as the countersink diameters are matched to the heads of these screws.

N

SIG 90°
HSS

30 105 ...

DC_2 _{z9} mm	DC_1 mm	OAL mm	MK	
30	4,2	112	2	300
31	4,2	112	2	310
34	4,5	118	2	340
37	4,8	118	2	370
40	10,0	140	3	400
50	14,0	150	3	500
63	16,0	180	4	630
80	22,0	190	4	800

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 94

Countersink 60°, DIN 334-C – set

Scope of supply:

Countersinks Ø 6,3; 8,0; 10,0; 12,5; 16,0; 20,0 in case




30 150 ...

999

Countersink 120°, factory standard-C

▲ 3 cutting edges for countersinking and deburring in virtually all materials



SIG 120°
HSS

30 170 ...

DC_2 _{z9} mm	DC_1 mm	DCONMS _{h9} mm	OAL mm
6,3	1,5	5	45
8,3	2,0	6	50
10,4	2,5	6	50
12,4	2,8	8	56
16,5	3,2	10	60
20,5	3,5	10	60
25,0	3,8	10	63


063
083
104
124
165
205
250

P	●
M	○
K	●
N	●
S	○
H	○
O	●

→ v_c Page 94

Deburring countersink 90°, factory standard-A

▲ with angled hole to avoid burrs and chattermarks when countersinking and deburring in soft long-chipping materials, e.g. aluminium, plastics etc.



SIG 90°
HSS-E

TiN



SIG 90°
HSS-E

30 120 ...

30 121 ...

DC_2 mm	PHD mm	DCONMS _{h9} mm	OAL mm
6,3	1 - 4	6,3	45
10,0	2 - 5	6,0	45
14,0	5 - 10	8,0	48
21,0	10 - 15	10,0	65
28,0	15 - 20	12,0	85

040¹⁾
050
101
150
200

040¹⁾
050
101
150
200

P	●	●
M	○	○
K	●	●
N	●	●
S	○	○
H	○	○
O	●	●

1) can be used in both directions

→ v_c Page 95

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment	Tensile strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm ² / 125 HB	1.0401	C15	1.1141 Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm ² / 190 HB	1.1191	C45E	1.0718 9SMnPb28
		P.1.3		Tempered	840 N/mm ² / 250 HB	1.1191	C45E	1.0535 C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm ² / 270 HB	1.1223	C60R	1.0535 C55
		P.1.5		Tempered	1010 N/mm ² / 300 HB	1.1223	C60R	1.0727 45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm ² / 180 HB	1.7131	16MnCr5	1.6587 17CrNiMo6
		P.2.2		Tempered	930 N/mm ² / 275 HB	1.7131	16MnCr5	1.6587 17CrNiMo6
		P.2.3		Tempered	1010 N/mm ² / 300 HB	1.7225	42CrMo4	1.3505 100Cr6
		P.2.4		Tempered	1200 N/mm ² / 375 HB	1.7225	42CrMo4	1.3505 100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm ² / 200 HB	1.4021	X20Cr13	1.4034 X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm ² / 300 HB	1.2343	X38CrMoV5-1	1.4034 X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm ² / 400 HB	1.2343	X38CrMoV5-1	1.4034 X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm ² / 200 HB	1.4016	X6Cr17	1.2316 X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm ² / 300 HB	1.4112	X90CrMoV18	1.2316 X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm ² / 180 HB	1.4301	X5CrNi18-10	1.4571 X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539 X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm ² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501 X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm ² / 180 HB	0.6010	GG-10	0.6025 GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm ² / 260 HB	0.6030	GG-30	0.6045 GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm ² / 160 HB	0.7040	GGG-40	0.7060 GGG-60
		K.2.2	Pearlitic		845 N/mm ² / 250 HB	0.7070	GGG-70	0.7080 GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm ² / 130 HB	0.8035	GTW-35-04	0.8045 GTW-45
		K.3.2	Pearlitic		780 N/mm ² / 230 HB	0.8165	GTS-65-02	0.8170 GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315 AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm ² / 100 HB	3.1355	AlCuMg2	3.2315 AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm ² / 75 HB	3.2581	G-AlSi12	3.2163 G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm ² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373 G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm ² / 130 HB		G-AlSi17Cu4Mg	G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm ² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410 CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm ² / 90 HB	2.0331	CuZn15	2.4070 CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm ² / 100 HB	2.0060	E-Cu57	2.0590 CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312 MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm ² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865 G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm ² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876 X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm ² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856 NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm ² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955 NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm ² / 320 HB	2.4765	CoCr20W15Ni	1.3401 G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm ²	3.7025	Ti99,8	3.7034 Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm ² / 320 HB	3.7165	TiAl6V4	Ti-6246 Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm ² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410 Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC			
		H.1.2		Hardened and tempered	56–60 HRC			
		H.1.3		Hardened and tempered	61–65 HRC			
		H.1.4		Hardened and tempered	66–70 HRC			
	Chilled iron	H.2.1		Cast	400 HB			
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC			
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm ²			
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm ²			
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm ²			
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm ²			
		O.3.1	Graphite					

* Tensile strength

Cutting data standard values for REAMAX TS

Index	40 577 ..., 40 585 ...						40 521 ..., 40 571 ...					
	75J.65, 75H.65 – ASG3000 / HM-DBG-P						75J.65, 75H.65 – ASG0106 / HM-DBG-P					
	Nominal Ø in mm ▶		18–21,999	22–31,799	31,8–51,999	52–65	Nominal Ø in mm ▶		18–21,999	22–31,799	31,8–51,999	52–65
	Reaming allowance Ø ▶		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50	Reaming allowance Ø ▶		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50
	Number of flutes ▶		6	6	8	10	Number of flutes ▶		6	6	8	10
	3xD	5xD	f (mm/rev)				3xD	5xD	f (mm/rev)			
	v _c (m/min)		f (mm/rev)				v _c (m/min)		f (mm/rev)			
P.1.1	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.2	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.3	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.4	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.5	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.1	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.2	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.3	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.4	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.3.1							30 (25–50)	30 (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.3.2							30 (25–50)	30 (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.3.3							30 (25–50)	30 (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.4.1							45 (35–60)	40 (35–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.4.2							45 (35–60)	40 (35–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
M.1.1							45 (35–60)	40 (30–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
M.2.1							45 (35–60)	40 (30–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
M.3.1							30 (25–50)	30 (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
K.1.1	150 (130–220)	120 (100–150)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40						
K.1.2	150 (130–220)	120 (100–150)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40						
K.2.1	175 (150–300)	150 (130–180)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40						
K.2.2	120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
K.3.1	120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
K.3.2	120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX TS

Index	40 526 ..., 40 580 ...						40 539 ...					
	75J.17, 75H.17 – ASG0706 / HM-DBC						75H.93 – ASG3000 / DST					
	Nominal Ø in mm ▶		18–21,999	22–31,799	31,8–51,999	52–65	Nominal Ø in mm ▶		18–21,999	22–31,799	31,8–51,999	52–65
	Reaming allowance Ø ▶		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50	Reaming allowance Ø ▶		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50
	Number of flutes ▶		6	6	8	10	Number of flutes ▶		6	6	8	10
	3xD	5xD	f (mm/rev)				3xD	5xD	f (mm/rev)			
	v _c (m/min)		f (mm/rev)				v _c (m/min)		f (mm/rev)			
P.1.1							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.2							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.3							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.4							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.5							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.1							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.2							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.3							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.4							150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1							175 (150–300)	150 (130–180)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40
K.2.2							120 (100–150)	100 (80–120)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
K.3.1							120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
K.3.2							120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
N.1.1	150 (130–300)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.1.2	150 (130–300)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.2.1	200 (180–300)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.2.2	200 (180–300)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.2.3	200 (180–300)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.3.1							150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10
N.3.2							150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10
N.3.3												
N.4.1	150 (180–300)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1	250 (220–270)	250 (220–270)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX TS

Index	40 544 ...						40 597 ...					
	75J.93 – ASG3000 / DST						75J.93 – ASG4000 / DST					
	Nominal Ø in mm ▶		18–21,999	22–31,799	31,8–51,999	52–65	Nominal Ø in mm ▶		18–21,999	22–31,799	31,8–51,999	52–65
	Reaming allowance Ø ▶		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50	Reaming allowance Ø ▶		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50
	Number of flutes ▶		6	6	8	10	Number of flutes ▶		6	6	8	10
	3xD	5xD	f (mm/rev)				3xD	5xD	f (mm/rev)			
	v _c (m/min)		f (mm/rev)				v _c (m/min)		f (mm/rev)			
P.1.1	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.2	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.3	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.4	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.5	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.1	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.2	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.3	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.4	150 (130–200)	120 (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	150 (130–200)	120 (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1	175 (150–300)	150 (130–180)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40	225 (200–300)	180 (160–240)	1,20–1,60	1,50–2,00	2,00–2,70	2,90–4,10
K.2.2	120 (100–150)	100 (80–120)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	120 (100–150)	100 (80–120)	1,20–1,60	1,50–2,00	2,00–2,70	2,90–4,10
K.3.1	120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
K.3.2	120 (100–180)	120 (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	120 (100–180)	120 (100–150)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10						
N.3.2	150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10						
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX

Index	40 560 ...					40 551 ...				
	640.65 – ASG3000 / HM-DBG-P					640.65 – ASG0106 / HM-DBG-P				
	Nominal Ø in mm ▶					Nominal Ø in mm ▶				
	Reaming allowance Ø ▶					Reaming allowance Ø ▶				
	Number of flutes ▶					Number of flutes ▶				
	3xD	5xD				3xD	5xD			
	v _c (m/min)		f (mm/rev)			v _c (m/min)		f (mm/rev)		
P.1.1	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.2	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.3	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.4	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.5	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.1	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.2	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.3	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.4	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00
P.3.1						30 (25–50)	30 (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
P.3.2						30 (25–50)	30 (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
P.3.3						30 (25–50)	30 (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
P.4.1						45 (35–60)	40 (35–50)	0,70–0,90	1,20–1,60	1,20–1,60
P.4.2						45 (35–60)	40 (35–50)	0,70–0,90	1,20–1,60	1,20–1,60
M.1.1						45 (35–60)	40 (35–50)	0,70–0,90	1,20–1,60	1,20–1,60
M.2.1						30 (25–50)	30 (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
M.3.1						30 (25–50)	30 (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
K.1.1	200 (180–250)	160 (140–200)	1,00–1,40	1,30–1,90	1,30–1,90					
K.1.2	200 (180–250)	160 (140–200)	1,00–1,40	1,30–1,90	1,30–1,90					
K.2.1	225 (200–300)	180 (160–240)	1,00–1,40	1,30–1,90	1,30–1,90					
K.2.2	120 (100–150)	100 (80–120)	0,90–1,20	1,20–1,60	1,20–1,60					
K.3.1	150 (130–250)	120 (100–200)	0,90–1,20	1,20–1,60	1,20–1,60					
K.3.2	120 (100–150)	100 (80–120)	0,90–1,20	1,20–1,60	1,20–1,60					
N.1.1										
N.1.2										
N.2.1										
N.2.2										
N.2.3										
N.3.1										
N.3.2										
N.3.3										
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1						40 (35–60)	40 (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
H.1.2						40 (35–60)	40 (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
H.1.3						30 (25–50)	30 (25–50)	0,40–0,80	0,60–1,00	0,60–1,00
H.1.4										
H.2.1						40 (35–60)	40 (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
H.3.1						40 (35–60)	40 (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX

Index	40 505 ...					40 570 ...				
	640.71 – ASG3000 / HM-TiN					640.27 – ASG0706 / HM-DBC				
	Nominal Ø in mm ▶					Nominal Ø in mm ▶				
	Reaming allowance Ø ▶					Reaming allowance Ø ▶				
	Number of flutes ▶					Number of flutes ▶				
	3xD	5xD				3xD	5xD			
	v _c (m/min)		f (mm/rev)			v _c (m/min)		f (mm/rev)		
P.1.1	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.2	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.3	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.4	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.5	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.1	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.2	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.3	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.4	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.3.1										
P.3.2										
P.3.3										
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1	80 (60–130)	80 (60–120)	1,00–1,40	1,80–2,40	1,80–2,40					
K.1.2	80 (60–130)	80 (60–120)	1,00–1,40	1,80–2,40	1,80–2,40					
K.2.1										
K.2.2										
K.3.1										
K.3.2										
N.1.1						150 (130–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.1.2						200 (180–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.2.1						200 (180–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.2.2						200 (180–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.2.3										
N.3.1	120 (100–200)	120 (100–150)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.2	120 (100–200)	120 (100–150)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.3	80 (60–150)	80 (60–120)	0,80–1,20	1,40–2,00	1,40–2,00					
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1						250 (220–270)	250 (220–270)	1,00–1,40	1,70–2,40	1,70–2,40



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX

Index	40 525 ...					40 536 ...				
	640.93 – ASG3000 / DST					640.93 – ASG4000 / DST				
	Nominal Ø in mm ▶					Nominal Ø in mm ▶				
	Reaming allowance Ø ▶					Reaming allowance Ø ▶				
	Number of flutes ▶					Number of flutes ▶				
	3xD	5xD	f (mm/rev)			3xD	5xD	f (mm/rev)		
	v _c (m/min)		f (mm/rev)			v _c (m/min)		f (mm/rev)		
P.1.1	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.2	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.3	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.4	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.5	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.1	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.2	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.3	150 (130–200)	120 (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	150 (130–200)	120 (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.4										
P.3.1										
P.3.2										
P.3.3										
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1										
K.1.2										
K.2.1	175 (150–300)	150 (130–180)	1,00–1,40	1,80–2,40	1,80–2,40	175 (150–300)	150 (130–180)	1,20–1,60	1,50–2,00	2,00–2,70
K.2.2	150 (130–250)	120 (100–160)	1,00–1,40	1,80–2,40	1,80–2,40	120 (100–180)	120 (100–150)	1,20–1,60	1,50–2,00	2,00–2,70
K.3.1	150 (130–250)	120 (100–160)	1,00–1,40	1,80–2,40	1,80–2,40					
K.3.2	120 (100–180)	120 (100–150)	0,90–1,20	1,50–2,00	1,50–2,00	120 (100–180)	120 (100–150)	1,00–1,30	1,20–1,70	1,70–2,30
N.1.1										
N.1.2										
N.2.1										
N.2.2										
N.2.3										
N.3.1	150 (130–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.2	150 (130–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.3										
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data for MultiChange exchange head reamers

Index	40 210 ..., 40 211 ...				40 220 ..., 40 221 ...				40 240 ..., 40 241 ...			
	CWC10				TiAlN				K10			
	Nominal Ø in mm ▶	8,0–12,59	12,6–29,99	30,0–32,00	Nominal Ø in mm ▶	8,0–12,59	12,6–29,99	30,0–32,00	Nominal Ø in mm ▶	8,0–12,59	12,6–29,99	30,0–32,00
	Reaming allowance Ø ▶	0,15–0,3	0,2–0,4	0,2–0,4	Reaming allowance Ø ▶	0,15–0,3	0,15–0,3	0,15–0,3	Reaming allowance Ø ▶	0,15–0,5	0,15–0,5	0,15–0,5
	Number of flutes ▶	4 / 6	6	8	Number of flutes ▶	4 / 6	6	8	Number of flutes ▶	4 / 6	6	8
	v_c (m/min)	f (mm/rev)			v_c (m/min)	f (mm/rev)			v_c (m/min)	f (mm/rev)		
P.1.1	140	0,6	0,8	1,0								
P.1.2	140	0,6	0,8	1,0								
P.1.3	90	0,6	0,8	1,0								
P.1.4	90	0,6	0,8	1,0								
P.1.5	90	0,6	0,8	1,0								
P.2.1	140	0,6	0,8	1,0								
P.2.2	140	0,6	0,8	1,0								
P.2.3	90	0,6	0,8	1,0								
P.2.4	90	0,6	0,8	1,0								
P.3.1	120	0,6	0,8	1,0								
P.3.2	90	0,6	0,8	1,0								
P.3.3	90	0,6	0,8	1,0								
P.4.1					40	0,3	0,4	0,5				
P.4.2					40	0,3	0,4	0,5				
M.1.1					40	0,3	0,4	0,5				
M.2.1					40	0,3	0,4	0,5				
M.3.1					30	0,3	0,4	0,5				
K.1.1												
K.1.2												
K.2.1	120	0,7	1,2	1,6								
K.2.2	90	0,7	1,2	1,6								
K.3.1	90	0,7	1,2	1,6								
K.3.2	90	0,7	1,2	1,6								
N.1.1									30	0,4	0,5	0,6
N.1.2									30	0,4	0,5	0,6
N.2.1									30	0,4	0,5	0,6
N.2.2									30	0,4	0,5	0,6
N.2.3									30	0,4	0,5	0,6
N.3.1									30	0,4	0,5	0,6
N.3.2									30	0,4	0,5	0,6
N.3.3									30	0,4	0,5	0,6
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values for Monomax

Index	40 656 ..., 40 666 ..., 40 657 ..., 40 665 ...							40 652 ..., 40 653 ...						
	56J.65, 56R.65, 56H.65, 56Q.65 – ASG3000 / HM-DBG-P							56J.65, 56R.65 – ASG0106 / HM-DBG-P						
	Nominal Ø in mm ▶ 5,6–8,899 8,9–12,00 12,01–22,00 22,01–25,899							Nominal Ø in mm ▶ 5,6–8,899 8,9–12,00 12,01–22,00 22,01–25,899						
	Reaming allowance Ø ▶ 0,10–0,20 0,10–0,30 0,20–0,30 0,20–0,40							Reaming allowance Ø ▶ 0,10–0,20 0,10–0,30 0,20–0,30 0,20–0,40						
	Number of flutes ▶ 4 6 6 6							Number of flutes ▶ 4 6 6 6						
	3xD	5xD	f (mm/rev)					3xD	5xD	f (mm/rev)				
	v _c (m/min)							v _c (m/min)						
P.1.1	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.1.2	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.1.3	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.1.4	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.1.5	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.2.1	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.2.2	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.2.3	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
P.2.4	60 (50–100)	60 (50–100)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90		60 (50–100)	60 (50–100)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90	
P.3.1								40 (35–60)	40 (35–60)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90	
P.3.2								40 (35–60)	40 (35–60)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90	
P.3.3								30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00	
P.4.1								45 (35–60)	40 (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00	
P.4.2								45 (35–60)	40 (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00	
M.1.1								30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00	
M.2.1								30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00	
M.3.1								30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00	
K.1.1	150 (130–220)	120 (100–150)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50								
K.1.2	150 (130–220)	120 (100–150)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50								
K.2.1	175 (150–300)	150 (130–180)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50								
K.2.2	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
K.3.1	150 (130–250)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50								
K.3.2	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30								
N.1.1														
N.1.2														
N.2.1														
N.2.2														
N.2.3														
N.3.1														
N.3.2														
N.3.3														
N.4.1														
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Monomax

Index	40 644 ..., 40 645 ...						40 605 ..., 40 606 ...					
	56H.65, 56Q.65 – ASG0106 / HM-DBG-P						56J.71, 56R.71 – ASG3000 / HM-TiN					
	Nominal Ø in mm ▶		5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899	Nominal Ø in mm ▶		5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899
	Reaming allowance Ø ▶		0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40	Reaming allowance Ø ▶		0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40
	Number of flutes ▶		4	6	6	6	Number of flutes ▶		4	6	6	6
	3xD	5xD	f (mm/rev)				3xD	5xD	f (mm/rev)			
	v _c (m/min)		f (mm/rev)				v _c (m/min)		f (mm/rev)			
P.1.1							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.2							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.3							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.4							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.5							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.1							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.2							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.3							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.4							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.3.1	30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.3.2	30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.3.3	30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.4.1	45 (35–60)	40 (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.4.2	45 (35–60)	40 (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
M.1.1	45 (35–60)	40 (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
M.2.1	45 (35–60)	40 (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
M.3.1	30 (25–50)	30 (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
K.1.1							80 (60–130)	80 (60–120)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50
K.1.2							80 (60–130)	80 (60–120)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1							120 (–200)	120 (–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50
N.3.2							120 (–200)	120 (–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50
N.3.3							80 (–150)	80 (–120)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Monomax

Index	40 625 ..., 40 626 ...						40 635 ..., 40 636 ...					
	56J.93, 56R.93 – ASG3000 / DST						56J.93, 56R.93 – ASG4000 / DST					
	Nominal Ø in mm ▶ 5,6–8,899 8,9–12,00 12,01–22,00 22,01–25,899						Nominal Ø in mm ▶ 5,6–8,899 8,9–12,00 12,01–22,00 22,01–25,899					
	Reaming allowance Ø ▶ 0,10–0,20 0,10–0,30 0,20–0,30 0,20–0,40						Reaming allowance Ø ▶ 0,10–0,20 0,10–0,30 0,20–0,30 0,20–0,40					
	Number of flutes ▶ 4 6 6 6						Number of flutes ▶ 4 6 6 6					
	3xD	5xD	f (mm/rev)				3xD	5xD	f (mm/rev)			
	v _c (m/min)		f (mm/rev)				v _c (m/min)		f (mm/rev)			
P.1.1	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.2	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.3	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.4	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.5	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.1	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.2	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.3	150 (130–200)	120 (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	150 (130–200)	120 (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1	175 (150–300)	150 (130–180)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50	175 (150–300)	150 (130–180)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50
K.2.2	120 (100–150)	100 (80–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
K.3.1	150 (130–250)	120 (100–200)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
K.3.2	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	150 (130–300)	150 (130–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50						
N.3.2	150 (130–300)	150 (130–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50						
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Monomax

Index	40 648 ..., 40 649 ...						40 640 ..., 40 641 ...					
	56J.17, 56R.17 – ASG0706 / DBC						56H.17, 56Q.17 – ASG0706 / DBC					
	Nominal Ø in mm ▶ 5,6–8,899 8,9–12,00 12,01–22,00 22,01–25,899						Nominal Ø in mm ▶ 5,6–8,899 8,9–12,00 12,01–22,00 22,01–25,899					
	Reaming allowance Ø ▶ 0,10–0,20 0,10–0,30 0,20–0,30 0,20–0,40						Reaming allowance Ø ▶ 0,10–0,20 0,10–0,30 0,20–0,30 0,20–0,40					
	Number of flutes ▶ 4 6 6 6						Number of flutes ▶ 4 6 6 6					
	3xD v _c (m/min)	5xD	f (mm/rev)				3xD v _c (m/min)	5xD	f (mm/rev)			
P.1.1												
P.1.2												
P.1.3												
P.1.4												
P.1.5												
P.2.1												
P.2.2												
P.2.3												
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1	150 (130–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	150 (130–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.1.2	150 (130–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	150 (130–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.2.1	200 (180–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	200 (180–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.2.2	200 (180–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	200 (180–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.2.3	200 (180–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	200 (180–300)	150 (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1	250 (220–270)	250 (220–270)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	250 (220–270)	250 (220–270)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Fullmax, long

Index	40 484 ..., 40 485 ..., 40 486 ..., 40 487 ...											
	Type UNI											
	Ø range (mm) ▶			Ø 2,97 – 4,05			Ø 4,06 – 6,05			Ø 6,06 – 7,55		
	Number of flutes ▶			4			4			6		
	v _c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)
P.1.1	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.1.2	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.1.3	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.1.4	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.1.5	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.2.1	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.2.2	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.2.3	180 (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20
P.2.4	80 (70–120)	0,40–0,50	0,10–0,20	0,40–0,60	0,10–0,20	0,90–1,10	0,20	1,00–1,20	0,20	1,00–1,30	0,20–0,30	1,30–1,50
P.3.1	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
P.3.2	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
P.3.3	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
P.4.1	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
P.4.2	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
M.1.1	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
M.2.1	20 (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
M.3.1	15 (10–30)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72
K.1.1	120 (100–180)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20
K.1.2	120 (100–180)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20
K.2.1	200 (180–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20
K.2.2	120 (100–150)	0,50–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,00–1,30	0,20	1,30–1,60	0,20–0,30	1,50–1,80
K.3.1	200 (180–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20
K.3.2	120 (100–150)	0,50–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,00–1,30	0,20	1,30–1,60	0,20–0,30	1,50–1,80
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	150 (130–250)	0,50–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,40	0,20	1,40–1,70	0,20	1,60–1,90	0,20–0,30	1,90–2,20
N.3.2	100 (80–150)	0,40–0,60	0,10–0,20	0,60–0,80	0,10–0,20	1,00–1,30	0,20	1,20–1,40	0,20	1,30–1,60	0,20–0,30	1,60–1,80
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30
S.2.2	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30
S.2.3												
S.3.1	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30
S.3.2	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30
S.3.3												
H.1.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20	1,20–1,80
H.1.2	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20	1,20–1,80
H.1.3	30 (25–50)	0,50–0,70	0,10–0,20	0,70–1,00	0,10–0,20	1,20–1,70	0,20	1,30–1,70	0,20	1,30–2,00	0,20	1,30–2,00
H.1.4												
H.2.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80
H.3.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Fullmax, long

Index	K	40 477 ..., 40 478 ...						
		Type K						
		Ø range (mm) ▶	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
		Reaming allowance Ø ▶	0,10–0,20	0,10–0,20	0,20	0,20	0,20–0,30	0,30
		Number of flutes ▶	6	6	8	8	8	8
v _c (m/min)		f (mm/rev)						
K.1.1	200 (180–250)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60	
K.1.2	200 (180–250)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60	
K.2.1	225 (200–300)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60	
K.2.2	120 (100–150)	0,60–0,90	0,70–1,00	1,20–1,60	1,20–1,60	1,50–1,90	1,80–2,20	
K.3.1	225 (200–300)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60	
K.3.2	120 (100–150)	0,60–0,90	0,70–1,00	1,20–1,60	1,20–1,60	1,50–1,90	1,80–2,20	

Index	VA	40 401 ..., 40 402 ..., 40 403 ..., 40 404 ...						
		Type VA						
		Ø range (mm) ▶	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
		Reaming allowance Ø ▶	0,10–0,20	0,10–0,20	0,20	0,20	0,20–0,30	0,30
		Number of flutes ▶	4	4	6	6	6	6
		v _c (m/min)	f (mm/rev)					
P.3.1	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
P.3.2	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
P.3.3	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
P.4.1	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
P.4.2	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
M.1.1	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
M.2.1	15 (10–30)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	
M.3.1	15 (10–30)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72	

Index	ALU	40 471 ..., 40 472 ..., 40 473 ..., 40 474 ...						
		Type ALU						
		Ø range (mm) ▶	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
		Reaming allowance Ø ▶	0,10–0,20	0,10–0,20	0,20	0,20	0,20–0,30	0,30
		Number of flutes ▶	4	4	6	6	6	6
	v _c (m/min)	f (mm/rev)						
N.1.1	200 (180–300)	0,50–0,60	0,60–0,90	1,10–1,60	1,20–1,60	1,20–1,80	1,20–1,80	
N.1.2	200 (180–300)	0,50–0,60	0,60–0,90	1,10–1,60	1,20–1,60	1,20–1,80	1,20–1,80	
N.2.1	200 (180–250)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00	
N.2.2	200 (180–300)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00	
N.2.3	200 (180–250)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00	
O.3.1	250 (220–270)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00	

Index	H	40 475 ..., 40 476 ...					
		Type H					
	Ø range (mm) ▶	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
	Reaming allowance Ø ▶	0,10–0,20	0,10–0,20	0,20	0,20	0,20	0,20
	Number of flutes ▶	4	4	6	6	6	6
	v_c (m/min)	f (mm/rev)					
H.1.1	40 (35–60)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.1.2	30 (25–50)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.1.3	30 (25–50)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.1.4	30 (25–50)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.2.1	40 (35–60)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.3.1	40 (35–60)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80

* Wet machining recommended



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Fullmax, short

Index	UNI	40 481 ..., 40 483 ..., 40 488 ..., 40 489 ...												
		Type UNI												
		Ø range (mm) ▶	Ø 2,97 – 4,05		Ø 4,06 – 6,05		Ø 6,06 – 7,55		Ø 7,56 – 12,05		Ø 12,06 – 15,97		Ø 15,98 – 20,05	
		Number of flutes ▶	4		4		6		6		6		6	
				Reaming allowance Ø		Reaming allowance Ø		Reaming allowance Ø		Reaming allowance Ø		Reaming allowance Ø		Reaming allowance Ø
	v _c (m/min)	f (mm/rev)		f (mm/rev)		f (mm/rev)		f (mm/rev)		f (mm/rev)		f (mm/rev)		
P.1.1	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.1.2	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.1.3	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.1.4	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.1.5	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.2.1	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.2.2	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.2.3	200 (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30	
P.2.4	65 (55–110)	0,45–0,50	0,10–0,20	0,45–0,60	0,10–0,20	1,00–1,10	0,20	1,20–1,30	0,20	1,20–1,40	0,20–0,30	1,90–2,10	0,30	
P.3.1	40 (30–80)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30	
P.3.2	40 (30–80)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30	
P.3.3	40 (30–80)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30	
P.4.1	45 (40–65)	0,45–0,50	0,10–0,20	0,45–0,60	0,10–0,20	1,00–1,10	0,20	1,20–1,30	0,20	1,20–1,40	0,20–0,30	1,90–2,10	0,30	
P.4.2	45 (40–65)	0,45–0,50	0,10–0,20	0,45–0,60	0,10–0,20	1,00–1,10	0,20	1,20–1,30	0,20	1,20–1,40	0,20–0,30	1,90–2,10	0,30	
M.1.1	40 (35–60)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30	
M.2.1	40 (35–60)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30	
M.3.1	40 (35–60)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30	
K.1.1	200 (180–250)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,50–2,90	0,30	
K.1.2	200 (180–250)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,50–2,90	0,30	
K.2.1	225 (200–300)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,50–2,90	0,30	
K.2.2	120 (100–150)	0,60–0,90	0,10–0,20	0,70–1,00	0,10–0,20	1,20–1,60	0,20	1,20–1,60	0,20	1,50–1,90	0,20–0,30	2,00–2,40	0,30	
K.3.1	225 (200–300)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,00–2,40	0,30	
K.3.2	120 (100–150)	0,60–0,90	0,10–0,20	0,70–1,00	0,10–0,20	1,20–1,60	0,20	1,20–1,60	0,20	1,50–1,90	0,20–0,30	2,00–2,40	0,30	
N.1.1														
N.1.2														
N.2.1														
N.2.2														
N.2.3														
N.3.1	150 (120–250)	0,50–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,40	0,20	1,40–1,70	0,20	1,60–1,90	0,20–0,30	2,50–2,90	0,30	
N.3.2	100 (80–150)	0,40–0,60	0,10–0,20	0,60–0,80	0,10–0,20	1,00–1,30	0,20	1,20–1,40	0,20	1,30–1,60	0,20–0,30	2,10–2,40	0,30	
N.3.3														
N.4.1														
S.1.1														
S.1.2														
S.2.1	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30	
S.2.2	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30	
S.2.3														
S.3.1	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30	
S.3.2	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30	
S.3.3														
H.1.1	40 (35–60)	0,20–0,30	0,10–0,20	0,20–0,30	0,10–0,20	0,40–0,60	0,20	0,50–0,60	0,20	0,50–0,70	0,20	0,80–1,00	0,20	
H.1.2	30 (25–50)	0,20–0,30	0,10–0,20	0,20–0,30	0,10–0,20	0,40–0,60	0,20	0,50–0,60	0,20	0,50–0,70	0,20	0,80–1,00	0,20	
H.1.3	30 (25–50)	0,20–0,30	0,10–0,20	0,20–0,30	0,10–0,20	0,40–0,60	0,20	0,50–0,60	0,20	0,50–0,70	0,20	0,80–1,00	0,20	
H.1.4														
H.2.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80	0,30	
H.3.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80	0,30	
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for solid carbide reamers

Index	40 420 ..., 40 421 ..., 40 430 ..., 40 431 ...																			
	v _c (m/min)	TiAlN	≤ Ø 0,94		Ø 0,95–5		Ø 5,01–8		Ø 8,01–10		Ø 10,01–12		Ø 12,01–15		Ø 15,01–20		Ø 20,01–25		Ø 25,01–30	
			f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	20	30	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.2	20	30	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.3	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.4	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.5	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.1	15	25	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.2	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.3	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.4	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.3.1	15	25	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.3.2	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.3.3	12	15	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.4.1																				
P.4.2																				
M.1.1		15			0,08	0,08	0,10	0,10	0,15	0,10	0,15	0,10	0,20	0,20	0,25	0,20	0,25	0,20	0,25	0,20
M.2.1		15			0,08	0,08	0,10	0,10	0,15	0,10	0,15	0,10	0,20	0,20	0,25	0,20	0,25	0,20	0,25	0,20
M.3.1		10			0,08	0,08	0,10	0,10	0,15	0,10	0,15	0,10	0,20	0,20	0,25	0,20	0,25	0,20	0,25	0,20
K.1.1	18	30	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.1.2	18	30	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.2.1	15	25	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.2.2	10	20	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.3.1	15	25	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.3.2	10	20	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.1.1	40		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.1.2	40		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.2.1	25		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.2.2	25		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.2.3																				
N.3.1	30		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.3.2	30		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.3.3	30		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.4.1																				
S.1.1		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.1.2		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.2.1		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.2.2		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.2.3		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.3.1		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.3.2		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.3.3		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
H.1.1		8			0,05	0,05	0,08	0,05	0,10	0,10	0,10	0,10	0,13	0,10	0,15	0,15	0,15	0,15	0,15	0,15
H.1.2		8			0,05	0,05	0,08	0,05	0,10	0,10	0,10	0,10	0,13	0,10	0,15	0,15	0,15	0,15	0,15	0,15
H.1.3																				
H.1.4																				
H.2.1		8			0,05	0,05	0,08	0,05	0,10	0,10	0,10	0,10	0,13	0,10	0,15	0,15	0,15	0,15	0,15	0,15
H.3.1																				
O.1.1	40		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
O.1.2	40		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
O.2.1																				
O.2.2																				
O.3.1																				



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. ±20% according to the usage conditions.

Cutting data standard values for solid carbide reamers – Type H

Index	40 435 ...								
		Ø 0,98 – 3,99		Ø 4,00 – 8,00		Ø 8,01 – 16,00		Ø 16,01 – 20,00	
		v_c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)
P.1.1	16	0,10	0,20	0,20	0,20	0,238	0,30	0,275	0,30
P.1.2	13	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.1.3	12	0,075	0,20	0,15	0,20	0,175	0,30	0,20	0,30
P.1.4	12	0,075	0,20	0,15	0,20	0,175	0,30	0,20	0,30
P.1.5	19	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.1	15	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.2	14	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.3	13	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.4	12	0,075	0,20	0,15	0,20	0,175	0,30	0,20	0,30
P.3.1									
P.3.2	11	0,063	0,20	0,125	0,20	0,15	0,30	0,175	0,30
P.3.3	11	0,063	0,20	0,125	0,20	0,15	0,30	0,175	0,30
P.4.1	11	0,063	0,20	0,125	0,20	0,15	0,30	0,175	0,30
P.4.2	8	0,05	0,20	0,10	0,20	0,113	0,30	0,125	0,30
M.1.1									
M.2.1	9	0,063	0,10	0,125	0,10	0,15	0,20	0,175	0,20
M.3.1	9	0,063	0,10	0,125	0,10	0,15	0,20	0,175	0,20
K.1.1	17	0,125	0,20	0,25	0,20	0,325	0,30	0,40	0,30
K.1.2	14	0,113	0,20	0,225	0,20	0,275	0,30	0,325	0,30
K.2.1	17	0,113	0,20	0,225	0,20	0,275	0,30	0,325	0,30
K.2.2	14	0,10	0,20	0,20	0,20	0,238	0,30	0,275	0,30
K.3.1	17	0,113	0,20	0,225	0,20	0,275	0,30	0,325	0,30
K.3.2	14	0,10	0,20	0,20	0,20	0,238	0,30	0,275	0,30
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1									
N.3.2									
N.3.3									
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1	8	0,075	0,10	0,15	0,20	0,175	0,30	0,20	0,30
H.1.2	7	0,063	0,10	0,125	0,20	0,15	0,30	0,175	0,30
H.1.3	5	0,05	0,10	0,10	0,20	0,113	0,30	0,125	0,30
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

* Wet machining preferred/dry machining possible



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values for solid carbide reamers

Index	40 405 ..., 40 415 ...						
	uncoated	≤ Ø 4,80		Ø 4,81 – 8,00		Ø 8,01 – 12,00	
		f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.2	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.3	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.4	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.5	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.1	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.2	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.3	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.4	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.3.1	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.3.2	15 (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.3.3							
P.4.1							
P.4.2							
M.1.1							
M.2.1							
M.3.1							
K.1.1	15 (10–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.1.2	15 (10–20)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.2.1	15 (10–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.2.2	10 (5–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.3.1	15 (10–20)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.3.2	10 (5–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
N.1.1	30 (20–40)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.1.2	30 (20–40)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.2.1	15 (10–20)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.2.2	15 (10–20)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.2.3							
N.3.1	20 (15–25)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.3.2	20 (15–25)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.3.3	20 (15–25)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.4.1							
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1							
S.3.2							
S.3.3							
H.1.1							
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1							
O.1.1							
O.1.2							
O.2.1							
O.2.2							
O.3.1							



The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data for HSS-E reamers

Index	40 110 ..., 40 115 ...									
	Nominal Ø in mm ▶	≤ Ø 5	Ø 5,01–8	Ø 8,01–12	Ø 12,01–15	Ø 15,01–20	Ø 20,01–25	Ø 25,01–30	Ø 30,01–40	Ø 40,01–50
	Reaming allowance Ø ▶	0,10	0,15	0,20	0,20	0,30	0,30	0,30	0,30	0,30
	v_c (m/min)	f (mm/rev)								
P.1.1	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.2	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.3	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.4	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.5	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.1	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.2	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.3	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.4	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.3.1	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.3.2	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.3.3	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1	12	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.1.2	12	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.2.1	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.2.2	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.3.1	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.3.2	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
N.1.1	15	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.1.2	15	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.2.1										
N.2.2										
N.2.3										
N.3.1	20	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.3.2	20	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.3.3	20	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1	25	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
O.1.2	25	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
O.2.1										
O.2.2										
O.3.1										



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data for HSS-E reamers

Index	40 139 ..., 40 140 ..., 40 145 ..., 40 150 ..., 40 160 ...																		
	v _c (m/min)	≤ Ø 5		Ø 5,01–8		Ø 8,01–12		Ø 12,01–15		Ø 15,01–20		Ø 20,01–25		Ø 25,01–30		Ø 30,01–40		Ø 40,01–50	
		f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	15	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,30	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.2	12	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,30	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.3	10	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,30	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.4	10	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.5	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.1	10	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,25	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.2	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.3	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.4	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.3.1	8	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.3.2	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.3.3	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.4.1	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.4.2	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
M.1.1	6	0,08	0,10	0,12	0,15	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35
M.2.1	4	0,08	0,10	0,12	0,15	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35
M.3.1	4	0,08	0,10	0,12	0,15	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35
K.1.1	14	0,10	0,10–0,15	0,16	0,20	0,24	0,20	0,28	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.1.2	12	0,10	0,10–0,15	0,16	0,20	0,24	0,20	0,28	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.2.1	12	0,10	0,10–0,15	0,16	0,15–0,20	0,20	0,20	0,25	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.2.2	10	0,10	0,10–0,15	0,16	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,35	0,40	0,40	0,40	0,40
K.3.1	12	0,10	0,10–0,15	0,16	0,20	0,24	0,20	0,28	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.3.2	10	0,10	0,10–0,15	0,16	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,35	0,40	0,40	0,40	0,40
N.1.1	20	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,60	0,45	0,80	0,50
N.1.2	20	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,60	0,45	0,80	0,50
N.2.1	18	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,60	0,45	0,80	0,50
N.2.2	18	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,50	0,45	0,80	0,50
N.2.3																			
N.3.1	18	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
N.3.2	15	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
N.3.3	15	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
N.4.1	18	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
S.1.1																			
S.1.2																			
S.2.1	4	0,08	0,10	0,12	0,15	0,16	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.2.2	4	0,08	0,10	0,12	0,15	0,16	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.2.3																			
S.3.1	6	0,08	0,10	0,12	0,15	0,16	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.3.2	4	0,08	0,10	0,10	0,15	0,125	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1	15	0,15	0,15	0,20	0,20	0,25	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,40	0,50
O.1.2	12	0,12	0,15	0,16	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35	0,50
O.2.1																			
O.2.2																			
O.3.1																			



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values indexable insert countersink

Index	30 196 ..., 30 197 ...			30 198 ...					
	Insert		Tool diameter	Insert		Tool diameter			
	BK8425	K10	Ø 16,5–37	BK8425	K10	Ø 10–15	Ø 15–20	Ø 20–30	Ø 30–48
	v _c (m/min)		f (mm/rev)	v _c (m/min)		f (mm/rev)			
P.1.1	200		0,12–0,16	260		0,06–0,12	0,12–0,20	0,15–0,25	0,20–0,30
P.1.2	200		0,20–0,30	260		0,06–0,12	0,12–0,20	0,15–0,25	0,20–0,30
P.1.3	200		0,20–0,30	270		0,06–0,12	0,12–0,20	0,25–0,40	0,25–0,40
P.1.4	180		0,20–0,30	240		0,06–0,12	0,12–0,20	0,25–0,40	0,25–0,40
P.1.5	180		0,17–0,27	230		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.2.1	160		0,20–0,30	270		0,06–0,12	0,12–0,20	0,25–0,40	0,25–0,40
P.2.2	160		0,20–0,30	260		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.2.3	160		0,15–0,20	180		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.2.4	160		0,10–0,16	150		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.3.1	140		0,10–0,15	160		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.3.2	140		0,08–0,13	130		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.3.3	140		0,06–0,12	120		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.4.1	120		0,10–0,16	180		0,08	0,15	0,16	0,18
P.4.2	120		0,06–0,12	130		0,08	0,15	0,16	0,18
M.1.1	160		0,10–0,15	150		0,08	0,15	0,16	0,18
M.2.1	140		0,10–0,15	150		0,08	0,15	0,16	0,18
M.3.1	100		0,07–0,13	130		0,08	0,15	0,16	0,18
K.1.1	180		0,40	160		0,15	0,30	0,40	0,60
K.1.2	160		0,32	120		0,15	0,30	0,40	0,60
K.2.1	140		0,30	160		0,15	0,25	0,30	0,35
K.2.2	140		0,18	100		0,12	0,20	0,25	0,35
K.3.1	120		0,20	120		0,10	0,18	0,25	0,30
K.3.2	120		0,18	100		0,10	0,18	0,25	0,30
N.1.1		250	0,20	400	250	0,05	0,12	0,15	0,20
N.1.2		250	0,20	400	250	0,05	0,12	0,15	0,20
N.2.1		250	0,30	250	250	0,06	0,16	0,20	0,25
N.2.2		250	0,30	250	250	0,06	0,16	0,20	0,25
N.2.3		250	0,25	230	250	0,10	0,20	0,25	0,30
N.3.1		230	0,30	200	230	0,05	0,10	0,12	0,15
N.3.2		230	0,32	220	230	0,05	0,10	0,12	0,15
N.3.3		230	0,22	330	230	0,05	0,10	0,12	0,15
N.4.1		230	0,30	200	230	0,05	0,10	0,12	0,15
S.1.1	60	20	0,12		20	0,05	0,10	0,12	0,15
S.1.2	50	20	0,10		20	0,05	0,10	0,12	0,15
S.2.1	60	20	0,12		20	0,05	0,10	0,12	0,15
S.2.2	50	20	0,10		20	0,05	0,10	0,12	0,15
S.2.3	30	20	0,06		20	0,05	0,10	0,12	0,15
S.3.1	100	60	0,22		60	0,05	0,10	0,12	0,15
S.3.2	80	30	0,20		30	0,05	0,10	0,12	0,15
S.3.3	50	30	0,12		30	0,05	0,10	0,12	0,15
H.1.1	100		0,10	100		0,05	0,10	0,15	0,20
H.1.2	80		0,08	80		0,05	0,10	0,15	0,20
H.1.3	50		0,05	50		0,05	0,10	0,15	0,20
H.1.4									
H.2.1	100		0,10	100		0,05	0,10	0,15	0,20
H.3.1	80		0,08	80		0,05	0,10	0,15	0,20
O.1.1		100	0,10		100	0,05	0,12	0,15	0,20
O.1.2		100	0,10		100	0,05	0,12	0,15	0,20
O.2.1									
O.2.2		100	0,03		100	0,05	0,12	0,15	0,20
O.3.1		100	0,08		100	0,05	0,12	0,15	0,20



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data for solid carbide countersinks

Index	30 115 ...						30 160 ...			
	Solid carbide 90°						Solid carbide 60°			
	v _c (m/min)	Ø 8,0– 12,4	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0	Ø 25,0– 31,0	v _c (m/min)	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0
		f (mm/rev)						f (mm/rev)		
P.1.1	40	0,10	0,12	0,14	0,18	0,22	40	0,12	0,14	0,18
P.1.2	40	0,10	0,12	0,14	0,18	0,22	40	0,12	0,14	0,18
P.1.3	30	0,08	0,10	0,10	0,14	0,18	30	0,10	0,10	0,14
P.1.4	30	0,08	0,10	0,12	0,14	0,18	30	0,10	0,12	0,14
P.1.5	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.2.1	30	0,08	0,10	0,12	0,14	0,18	30	0,10	0,12	0,14
P.2.2	20	0,05	0,06	0,08	0,10	0,12	20	0,06	0,08	0,10
P.2.3	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.2.4	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.3.1	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.3.2	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.3.3	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.4.1										
P.4.2										
M.1.1	15	0,06	0,07	0,08	0,09	0,12	15	0,07	0,08	0,09
M.2.1	15	0,06	0,07	0,08	0,09	0,12	15	0,07	0,08	0,09
M.3.1	15	0,06	0,07	0,08	0,09	0,12	15	0,07	0,08	0,09
K.1.1	24	0,12	0,14	0,18	0,20	0,25	24	0,14	0,18	0,20
K.1.2	24	0,12	0,14	0,18	0,20	0,25	24	0,14	0,18	0,20
K.2.1	18	0,12	0,14	0,18	0,20	0,25	18	0,14	0,18	0,20
K.2.2	18	0,12	0,14	0,18	0,20	0,25	18	0,14	0,18	0,20
K.3.1	24	0,12	0,14	0,18	0,20	0,25	24	0,14	0,18	0,20
K.3.2	18	0,12	0,14	0,18	0,20	0,25	18	0,14	0,18	0,20
N.1.1	58	0,12	0,14	0,18	0,22	0,26	58	0,14	0,18	0,22
N.1.2	58	0,12	0,14	0,18	0,22	0,26	58	0,14	0,18	0,22
N.2.1	45	0,12	0,14	0,18	0,22	0,26	45	0,14	0,18	0,22
N.2.2	45	0,12	0,14	0,18	0,22	0,26	45	0,14	0,18	0,22
N.2.3	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.3.1	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.3.2	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.3.3	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.4.1	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
S.1.1	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.1.2	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.2.1	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.2.2	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.2.3	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.3.1	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.3.2	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.3.3	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
H.1.1	8	0,06	0,08	0,08	0,10	0,12	8	0,08	0,08	0,10
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values for countersinks with irregular pitch

Index	30 117 ...							30 141 ...						
	HPC-TiN / Solid carbide							TiN / HSS						
	N	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0	N	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0
	v _c (m/min)	f (mm/rev)						v _c (m/min)	f (mm/rev)					
P.1.1	58	0,08	0,10	0,12	0,14	0,18	0,22	38	0,08	0,10	0,12	0,14	0,18	0,22
P.1.2	58	0,08	0,10	0,12	0,14	0,18	0,22	38	0,08	0,10	0,12	0,14	0,18	0,22
P.1.3	50	0,06	0,08	0,10	0,10	0,14	0,18	30	0,06	0,08	0,10	0,10	0,14	0,18
P.1.4	50	0,06	0,08	0,10	0,12	0,14	0,18	30	0,06	0,08	0,10	0,12	0,14	0,18
P.1.5	50	0,06	0,05	0,06	0,08	0,10	0,12	30	0,06	0,05	0,06	0,08	0,10	0,12
P.2.1	50	0,06	0,08	0,10	0,12	0,14	0,18	30	0,06	0,08	0,10	0,12	0,14	0,18
P.2.2	50	0,06	0,05	0,06	0,08	0,10	0,12	12	0,06	0,05	0,06	0,08	0,10	0,12
P.2.3	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.2.4	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.3.1	50	0,06	0,05	0,06	0,08	0,10	0,12	30	0,06	0,05	0,06	0,08	0,10	0,12
P.3.2	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.3.3	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.4.1	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
P.4.2	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
M.1.1	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
M.2.1	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
M.3.1	25	0,05	0,06	0,07	0,08	0,09	0,12							
K.1.1	50	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.1.2	50	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.2.1	45	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.2.2	45	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.3.1	35	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.3.2	35	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
N.1.1	80	0,10	0,12	0,14	0,18	0,22	0,26	48	0,10	0,12	0,14	0,18	0,22	0,26
N.1.2	80	0,10	0,12	0,14	0,18	0,22	0,26	48	0,10	0,12	0,14	0,18	0,22	0,26
N.2.1	60	0,10	0,12	0,14	0,18	0,22	0,26	40	0,10	0,12	0,14	0,18	0,22	0,26
N.2.2	60	0,10	0,12	0,14	0,18	0,22	0,26	40	0,10	0,12	0,14	0,18	0,22	0,26
N.2.3	60	0,10	0,14	0,18	0,20	0,24	0,30	40	0,10	0,14	0,18	0,20	0,24	0,30
N.3.1	68	0,12	0,14	0,18	0,20	0,24	0,30	40	0,12	0,14	0,18	0,20	0,24	0,30
N.3.2	68	0,12	0,14	0,18	0,20	0,24	0,30	40	0,12	0,14	0,18	0,20	0,24	0,30
N.3.3	68	0,12	0,14	0,18	0,20	0,24	0,30	40	0,12	0,14	0,18	0,20	0,24	0,30
N.4.1														
S.1.1	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.1.2	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.2.1	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.2.2	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.2.3	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.3.1	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.3.2	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.3.3	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
H.1.1	12	0,05	0,06	0,07	0,07	0,08		6	0,05	0,06	0,07	0,07	0,08	
H.1.2	8	0,05	0,06	0,07	0,07	0,08								
H.1.3														
H.1.4														
H.2.1	12	0,05	0,06	0,07	0,07	0,08								
H.3.1														
O.1.1	68	0,12	0,14	0,18	0,20	0,24	0,30	38	0,12	0,14	0,18	0,20	0,24	0,30
O.1.2	68	0,12	0,14	0,18	0,20	0,24	0,30	38	0,12	0,14	0,18	0,20	0,24	0,30
O.2.1	25	0,10	0,12	0,14	0,18	0,20	0,25							
O.2.2	25	0,10	0,12	0,14	0,18	0,20	0,25							
O.3.1	25	0,10	0,12	0,14	0,18	0,20	0,25							



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values for HSS countersink

Index	30 100 ...							30 102 ...						
	Type N							Type AL						
	N	Ø 4,3– 8,0	Ø 8,0– 12,4	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0	Ø 25,0– 31,0	AL	Ø 4,3– 8,0	Ø 8,0– 12,4	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0	Ø 25,0– 31,0
	v _c (m/min)	f (mm/rev)						v _c (m/min)	f (mm/rev)					
P.1.1	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.2	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.3	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.4	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.5	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.1	25	0,04–0,06	0,08	0,10	0,12	0,14	0,18	25	0,04–0,06	0,08	0,10	0,12	0,14	0,18
P.2.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.4	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.1	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.4.1														
P.4.2														
M.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
K.1.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.1.2	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.1	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25
N.1.1	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	39	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.1.2	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	39	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.1	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	28	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.2	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	28	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.3	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	28	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.3.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	39	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	39	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.3	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	39	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.4.1	60	0,10–0,13	0,16	0,20	0,23	0,26	0,30	66	0,10–0,13	0,16	0,20	0,23	0,26	0,30
S.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.1.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.1.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.3.1														



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values for HSS countersink

Index	30 110 ..., 30 130 ...							30 132 ...						
	Type N – TiN / TiAlN							Type VA – TiAlN						
	N	Ø 4,3– 8,0	Ø 8,0– 12,4	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0	Ø 25,0– 31,0	VA	Ø 4,3– 8,0	Ø 8,0– 12,4	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0	Ø 25,0– 31,0
	v _c (m/min)	f (mm/rev)						v _c (m/min)	f (mm/rev)					
P.1.1	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.2	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.3	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.4	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.5	14	0,03–0,04	0,05	0,06	0,08	0,10	0,12	14	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.1	29	0,04–0,06	0,08	0,10	0,12	0,14	0,18	29	0,04–0,06	0,08	0,10	0,12	0,14	0,18
P.2.2	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.3	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.4	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.1	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	13	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.2	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	13	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.3	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	13	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.4.1														
P.4.2														
M.1.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	11	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.2.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	11	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.3.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	11	0,04–0,05	0,06	0,07	0,08	0,09	0,12
K.1.1	9	0,06–0,10	0,12	0,14	0,18	0,20	0,25	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.1.2	9	0,06–0,10	0,12	0,14	0,18	0,20	0,25	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.1	9	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.2	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.1	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.2	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
N.1.1	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.1.2	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.1	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.2	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.3	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.3.1	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.2	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.3	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.4.1	69	0,10–0,13	0,16	0,20	0,23	0,26	0,30	69	0,10–0,13	0,16	0,20	0,23	0,26	0,30
S.1.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.1.2	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.2	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.3	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.2	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.3	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
H.1.1	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12
O.1.1	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.1.2	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.1	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.2	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.3.1														



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

Cutting data standard values for HSS countersink and counterbore

Index	30 105 ..., 30 150 ..., 30 170 ...									30 190 ..., 30 191 ...			
	HSS – 60° / 90° / 120°									HSS			
		Ø 4,3– 8,0	Ø 8,0– 12,4	Ø 12,4– 16,5	Ø 16,5– 20,5	Ø 20,5– 25,0	Ø 25,0– 31,0	Ø 31,0– 55,0	Ø 55,0– 80,0		DC 2 Ø 6,3	DC 2 Ø 10,0	DC 2 Ø 14,0
	v _c (m/min)	f (mm/rev)								v _c (m/min)	f (mm/rev)		
P.1.1	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	0,22–0,26	0,26–0,36	30	0,07	0,10	0,12
P.1.2	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	0,22–0,26	0,26–0,36	30	0,07	0,10	0,12
P.1.3	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	0,14–0,22	0,22–0,28	25	0,05	0,07	0,09
P.1.4	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	0,14–0,22	0,22–0,28	25	0,05	0,07	0,09
P.1.5	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,14	0,14–0,18	12	0,04	0,05	0,07
P.2.1	25	0,04–0,06	0,08	0,10	0,12	0,14	0,18	0,18–0,24	0,24–0,30	25	0,05	0,07	0,09
P.2.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.2.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.2.4	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.3.1	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.3.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.3.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.4.1													
P.4.2													
M.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12–0,16	0,16–0,18	8	0,04	0,06	0,07
M.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12–0,16	0,16–0,18	8	0,04	0,06	0,07
M.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12–0,16	0,16–0,18	8	0,04	0,06	0,07
K.1.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	12	0,08	0,13	0,16
K.1.2	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	12	0,08	0,13	0,16
K.2.1	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	10	0,08	0,13	0,16
K.2.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	10	0,08	0,13	0,16
K.3.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	12	0,08	0,13	0,16
K.3.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	10	0,08	0,13	0,16
N.1.1	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	35	0,09	0,13	0,16
N.1.2	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	35	0,09	0,13	0,16
N.2.1	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	25	0,09	0,13	0,16
N.2.2	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	25	0,09	0,13	0,16
N.2.3	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	25	0,09	0,13	0,16
N.3.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30–0,42	0,42–0,46	35	0,11	0,16	0,18
N.3.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30–0,42	0,42–0,46	35	0,11	0,16	0,18
N.3.3	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30–0,42	0,42–0,46	35	0,11	0,16	0,18
N.4.1	60	0,10–0,13	0,16	0,20	0,23	0,26	0,30	0,30–0,42	0,42–0,46	60	0,12	0,18	0,21
S.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.1.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.2.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.2.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.3.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.3.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.1.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.2.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.2.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.3.1													



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.


Cutting data standard values for HSS-E deburring countersink

Index	30 120 ..., 30 121 ...						
	HSS-E – 90°						
	TiN	uncoated	Ø 6,3	Ø 10,0	Ø 14,0	Ø 21,0	Ø 28,0
	v _c (m/min)		f (mm/rev)				
P.1.1	35	30	0,06–0,08	0,10	0,12	0,14	0,18
P.1.2	35	30	0,06–0,08	0,10	0,12	0,14	0,18
P.1.3	29	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12
P.1.4	29	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12
P.1.5	14	12	0,03–0,04	0,05	0,06	0,08	0,10
P.2.1	29	25	0,04–0,06	0,08	0,10	0,12	0,14
P.2.2	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.2.3	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.2.4	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.3.1	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.3.2	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.3.3	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.4.1							
P.4.2							
M.1.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
M.2.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
M.3.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
K.1.1	9	12	0,06–0,10	0,12	0,14	0,18	0,20
K.1.2	9	12	0,06–0,10	0,12	0,14	0,18	0,20
K.2.1	9	10	0,06–0,10	0,12	0,14	0,18	0,20
K.2.2	14	10	0,06–0,10	0,12	0,14	0,18	0,20
K.3.1	14	12	0,06–0,10	0,12	0,14	0,18	0,20
K.3.2	12	10	0,06–0,10	0,12	0,14	0,18	0,20
N.1.1	40	35	0,08–0,1	0,12	0,14	0,18	0,22
N.1.2	40	35	0,08–0,1	0,12	0,14	0,18	0,22
N.2.1	29	25	0,08–0,1	0,12	0,14	0,18	0,22
N.2.2	29	25	0,08–0,1	0,12	0,14	0,18	0,22
N.2.3	29	25	0,08–0,1	0,12	0,14	0,18	0,22
N.3.1	40	35	0,1–0,12	0,14	0,18	0,20	0,24
N.3.2	40	35	0,1–0,12	0,14	0,18	0,20	0,24
N.3.3	40	35	0,1–0,12	0,14	0,18	0,20	0,24
N.4.1	69	60	0,1–0,13	0,16	0,20	0,23	0,26
S.1.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.1.2	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.2.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.2.2	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.2.3	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.3.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.3.2	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.3.3	9	8	0,04–0,05	0,06	0,07	0,08	0,09
H.1.1	4		0,04–0,05	0,06	0,07	0,08	0,10
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1	4		0,04–0,05	0,06	0,07	0,08	0,10
O.1.1	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.1.2	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.2.1	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.2.2	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.3.1							




The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. $\pm 20\%$ according to the usage conditions.

REAMAX TS – Assembly instructions

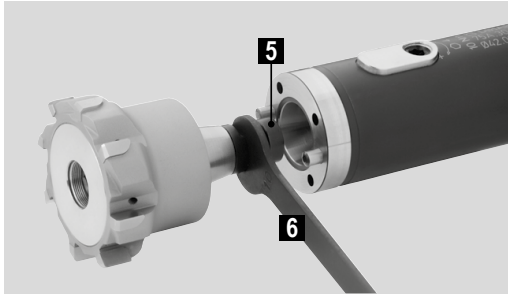


Clean the Morse taper adapter/face contact → grease-free.

Screw the pull stud (5) into the reaming head and tighten using the open-ended spanner (6).

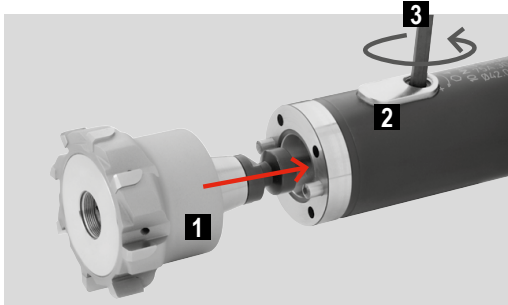


Use key (3) to open jaws (2), but do not fully release, and insert reaming head (1).

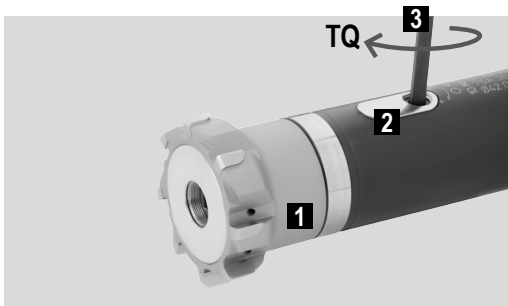

Use the key (3) to close the jaws (2), observe the recommended tightening torque.


When inserting the reaming head (1), this is pulled into its final position when the jaws (2) are closed.

Ø Range	Tightening torque (TQ)
18,000 – 19,999	1,5 Nm
20,000 – 21,999	2,5 Nm
22,000 – 26,999	4 Nm
27,000 – 34,999	5 Nm
35,000 – 41,999	6 Nm
42,000 – 51,999	10 Nm
52,000 – 65,000	13 Nm

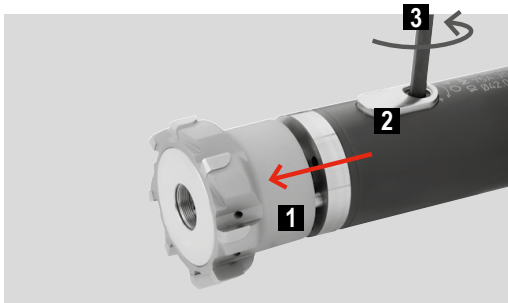

When removing the reamer head (1), this is pressed out of its position by the jaws (2) and can thus be easily removed from the holder:

Use key (3) to open the jaws (2) but do not fully release, and remove reamer head (1).

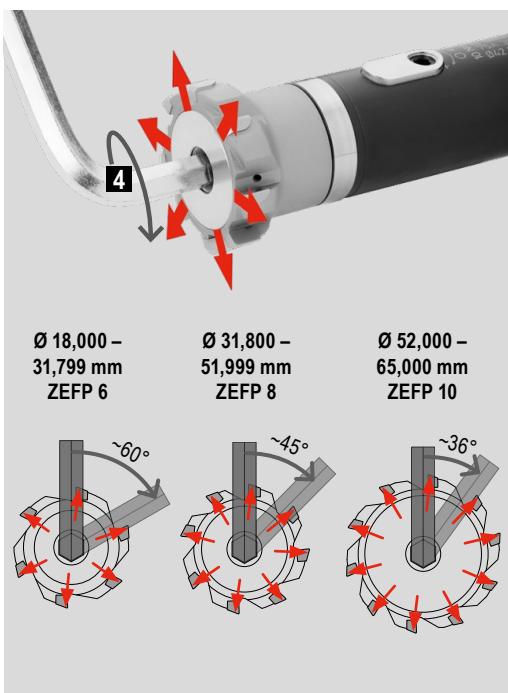

Adjustment for wear compensation:

The smallest drilling tolerances up to IT4 can be achieved through adjustment with the hex key (4).

ZEFP = Number of effective cutting edges, around the periphery	ZEFP 6	ZEFP 8	ZEFP 10
Pitch	~ 60°	~ 45°	~ 36°
Turning the hex key by ~ ...°, results in an adjustment of ~ ... mm in diameter	~ 15° ~ 0,006 mm in the Ø ~ 30° ~ 0,012 mm in the Ø ~ 45° ~ 0,018 mm in the Ø ~ 60° ~ 0,024 mm in the Ø	~ 15° ~ 0,003 mm in the Ø ~ 30° ~ 0,006 mm in the Ø ~ 45° ~ 0,009 mm in the Ø	~ 18° ~ 0,005 mm in the Ø ~ 36° ~ 0,010 mm in the Ø

Caution: For technical reasons, all REAMAX TS reaming heads and Monomax reamers have an irregular cutting edge pitch.

For this reason, the angles specified above are approximate values, to make handling easier.

If the required diameter is over turned, turning back the adjustment screw is not enough! If this occurs, the reaming head/reamer must be fully released and re-set again.

This adjustment facility is only intended to compensate for wear. Therefore, an adjustment of 0.015 mm in diameter should not normally be exceeded!


The adjustment values given above are recommended values based on empirical values and test results. However, these may vary slightly from case to case.

REAMAX TS – Operating instructions

Aligning the DAH Zero holder

The tool is recommended for radial alignment of max. 20 μm .

1. Loosen all adjustment screws and pre-load with 1 Nm (new tools are already supplied like this).
2. Place dial gauge with μm display on the ground bezel diameter.
3. Turn the tool to determine the point with the largest runout error using the dial gauge.
4. Adjust the corresponding adjustment screw with the hex key clockwise (1) until half the runout error has been corrected.
In doing so, over-tighten by approx. 5 μm .
5. Release the opposite adjustment screw (2) by the over-tightened amount.
6. Adjust all 4 adjustment screws until the runout is < 2 μm .

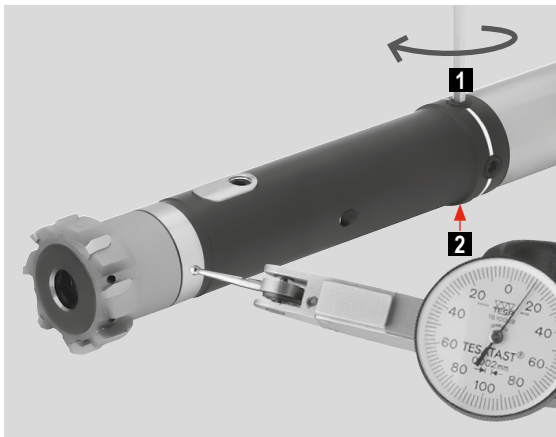


Please note:

- ▲ The runout must be checked and if necessary re-aligned after an adapter changeover, change of application, after any adjustment for wear compensation and before every re-commissioning, using adjustment steps 1 to 6
- ▲ Adjustment screws must always be tightened during usage with at least 1 Nm
- ▲ The max. re-adjustment torque is 4.5 Nm


Please note:

- ▲ Both measurement cutting edges are marked on the reaming head by a dot. Please use only this pair of cutting edges for mechanical measurement. Using other pairs of cutting edges will result in measurement errors.
- ▲ Measure the diameter at the front on the cutting edge due to back taper (see diagram)
- ▲ Please also avoid damage to the cutting edges during the measurement process.

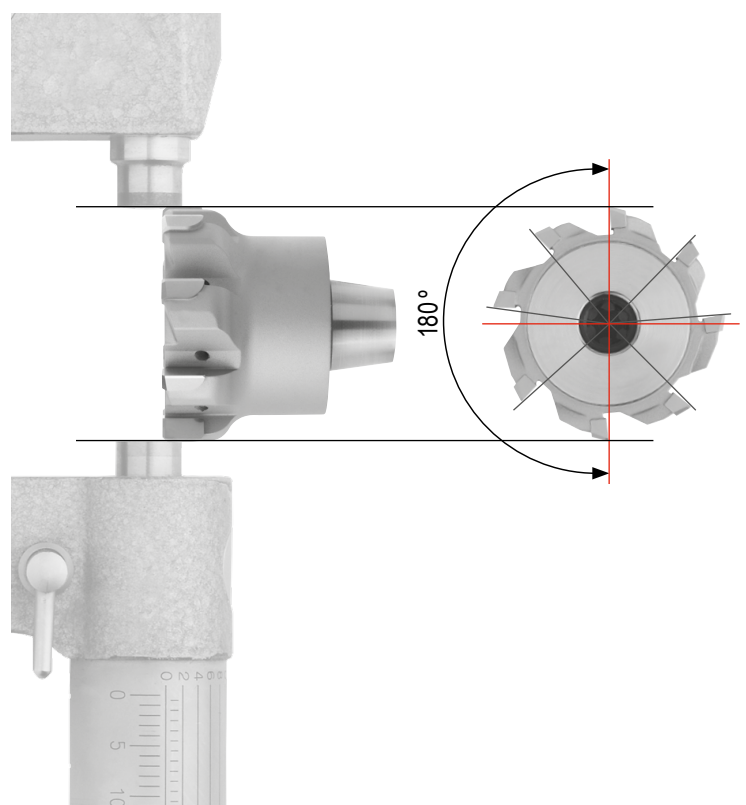


Problems / possible causes / solutions

Hole too large




- ▲ Runout error for reamer in the spindle → use DAH compensation system and correct runout
- ▲ Inaccurate alignment, reamer back-cuts → correct alignment and use DPS floating holder
- ▲ Built-up edge → reduce cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material or increase the oil content of the coolant
- ▲ Reamer too large → have reamer adapted

Hole too small




- ▲ Worn reamer → have reamer adjusted, replaced or repaired
- ▲ Reaming allowance too small → increase reaming allowance
- ▲ Cutting force too high → reduce feed or select other lead geometry (ASG)
- ▲ Reamer too small → have reamer adjusted, replaced or repaired

Conical hole, tapered backwards




- ▲ Inaccurate alignment → correct alignment and use DPS floating holder
- ▲ Misalignment between headstock and turret → correct turret and use DPS floating holder

Conical hole, tapered forwards




- ▲ Poor alignment, cutting edges push initially → correct alignment and use DPS floating holder

Hole is not round




- ▲ Reamer runout error too large → correct the runout with DAH compensation system
- ▲ Alignment error → correct alignment error and use DPS floating holder
- ▲ Asymmetric initial cutting through angled entry surface → countersink hole
- ▲ Workpiece tensioning → correct clamping of the workpieces
- ▲ Poor pre-machining → optimise pre-machining
- ▲ Feed too high → reduce feed

Hole exhibits chatter marks




- ▲ Cutting speed v_c too high → reduce cutting speed
- ▲ L to D ratio too high → reduce the speed of entry, pilot the bore or select other lead geometry (ASG)

Non clean-up




- ▲ Built-up edge → reduce cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material or increase the oil content of the coolant
- ▲ Cutting edge worn → have cutting edge repaired or replace the tool
- ▲ Reamer runout error → correct the runout with DAH compensation system
- ▲ No or insufficient cooling, chips are getting trapped → use thro' coolant supply and increase coolant pressure
- ▲ Unsuitable coolant → increase the oil content of the coolant
- ▲ Incorrect cutting data → use data according to catalogue recommendation

Grooves in the hole "Feed marking"




- ▲ Faulty cutting edge (edge breakage) → have reamer replaced or repaired
- ▲ Built-up edges → reduce cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material or increase the oil content of the coolant

Grooves in the hole "Retraction marking"




- ▲ Cutting edges moved too far out of the hole → move no more than lead length + 2 mm out of the hole
- ▲ Material springs back → do not retract at high speed but with increased (2-3 times) feed rate

Types of wear




Wear on clearance face

Reduce the cutting speed and select a more wear resistant cutting material or coating.




Cutting edge breakage

Reduce feed and reaming allowance. In the case of interrupted holes, use coated carbide instead of DST.




Cratering

Reduce the cutting speed and use a positive cutting edge geometry.




Edge breakages

Increase the cutting speed and use larger rake angle.




Notch wear

Reduce the cutting speed and select a more wear resistant cutting material or coating.




Fatigue fracture

Reduce feed, increase reamer stability.



Built-up edge

Use positive cutting edge geometry, increase the oil content of the coolant, reduce the cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material.



Cracks at right angles to the cutting edge

Use sufficient coolant and thro' coolant, reduce the cutting speed.

Common cutting edge geometries in the performance area

REAMAX, REAMAX TS, Monomax			
Standard geometries			
Cutting edge geometry	Flute type	Chip flow	Lead angle
Through hole			
ASG4000	straight		
Through hole-Blind hole			
ASG3000	straight		
ASG0706	straight		
ASG0106	straight		
Special geometries			
Cutting edge geometry	Flute type	Chip flow Comments	Lead angle
ASG0703	straight	Leading edge	
ASG0704	straight	Leading edge with increased positional accuracy	
ASG09B	straight	Swarf control < Ø 32 mm	
ASG1402	straight	Swarf control > Ø 32 mm	
ASG02	straight		
ASG03	straight		
ASG05	left-handed		

Fullmax			
Standard geometries			
Cutting edge geometry	Flute type	Chip flow	Lead angle
Through hole			
ASG2210	left-hand helix		
ASG2231	left-hand helix		
ASG2270	straight		
Blind hole			
ASG2110	straight		
ASG2131	straight		
ASG2170	straight		
Through hole-Blind hole			
ASG2350	straight		
ASG2360	straight		



Numerous other cutting edge geometries, especially for your application, are available on request. Simply contact our technicians or use the form „Semi standard – Solid carbide reamer“ on our homepage in the download area.

Achievable surface quality

		Roughness ▶	N11	N10	N9	N8	N7	N6	N5	N4	N3	N2	N1
		Average roughness R_a ▶	25	12,5	6,3	3,2	1,6	0,8	0,4	0,2	0,1	0,05	0,025
		Surface roughness R_z ▶	100	63	40	25	16	10	6,3	4	2,5	1,6	1
Material group	P	1.0 – 4.2											
	M	1.1 – 3.1											
	K	1.1 + 2.1 + 3.1											
		1.2 + 2.2 + 3.2											
	N	1.1 – 2.3											
		3.1 – 3.3											
	S	1.1 – 3.3											
	H	1.1 – 1.3											

reachable conditionally reachable

This information is based on experience and may vary from case to case, depending on the prevailing conditions.

(all other surface values on request)

Tolerance classes covered with 1/100 reamer

The most common tolerance is H7, so most reamers configured for an H7 fit tolerance.

With the 1/100 reamers, increments of 0.01 mm can be covered, but are also suitable for various other dimensions.

For example, a 1/100 reamer diameter 8.02 mm can be used for a 8.0 fit F7.

Other fit sizes shown in the table.


Tolerance zone	Nominal Ø in mm											
	1,0	2,0	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0	11,0	12,0
A9				4,29	5,29	6,29	7,30	8,30	9,30	10,30	11,32	12,32
A11	1,31	2,31	3,31	4,32	5,32	6,32	7,35	8,35	9,35	10,35	11,37	12,37
B8				4,15	5,15	6,15	7,16	8,16	9,16	10,16		
B9				4,16	5,16	6,16	7,17	8,17	9,17	10,17	11,18	12,18
B10	1,17	2,17	3,17	4,17	5,17	6,17	7,19	8,19	9,19	10,19	11,20	12,20
B11	1,18	2,18	3,18	4,19	5,19	6,19	7,22	8,22	9,22	10,22	11,23	12,23
C8				4,08	5,08	6,08	7,09	8,09	9,09	10,09	11,11	12,11
C9	1,07	2,07	3,07	4,09	5,09	6,09	7,10	8,10	9,10	10,10	11,12	12,12
C10	1,09	2,09	3,09	4,10	5,10	6,10	7,12	8,12	9,12	10,12	11,14	12,14
C11	1,10	2,10	3,10	4,12	5,12	6,12	7,15	8,15	9,15	10,15	11,18	12,18
D7											11,06	12,06
D8				4,04	5,04	6,04	7,05	8,05	9,05	10,05	11,06	12,06
D9				4,05	5,05	6,05	7,06	8,06	9,06	10,06	11,08	12,08
D10	1,05	2,05	3,05	4,06	5,06	6,06	7,08	8,08	9,08	10,08	11,10	12,10
D11	1,06	2,06	3,06	4,08	5,08	6,08	7,10	8,10	9,10	10,10	11,13	12,13
E7							7,03	8,03	9,03	10,03	11,04	12,04
E8	1,02	2,02	3,02	4,03	5,03	6,03	7,04	8,04	9,04	10,04	11,05	12,05
E9	1,03	2,03	3,03	4,04	5,04	6,04	7,05	8,05	9,05	10,05	11,06	12,06
F7	1,01	2,01	3,01				7,02	8,02	9,02	10,02	11,02	12,02
F8	1,01	2,01	3,01	4,02	5,02	6,02	7,02	8,02	9,02	10,02	11,03	12,03
F9	1,02	2,02	3,02	4,03	5,03	6,03	7,03	8,03	9,03	10,03	11,04	12,04
F10				4,04	5,04	6,04	7,05	8,05	9,05	10,05	11,07	12,07
G7				4,01	5,01	6,01	7,01	8,01	9,01	10,01		
H7										10,01	11,01	12,01
H8				4,01	5,01	6,01	7,01	8,01	9,01	10,01	11,02	12,02
H9	1,01	2,01	3,01	4,02	5,02	6,02	7,02	8,02	9,02	10,02	11,03	12,03
H10	1,03	2,03	3,03	4,03	5,03	6,03	7,04	8,04	9,04	10,04	11,05	12,05
H11	1,04	2,04	3,04	4,05	5,05	6,05	7,06	8,06	9,06	10,06	11,08	12,08
H12	1,07	2,07	3,07	4,08	5,08	6,08	7,10	8,10	9,10	10,10	11,13	12,13
H13	1,11	2,11	3,11	4,14	5,14	6,14	7,18	8,18	9,18	10,18	11,22	12,22
J6				4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
J7				4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
J8	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
JS7				4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
JS8	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
JS9	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,01	12,01
K8	0,99	1,99	2,99				6,99	7,99	8,99	9,99	10,99	11,99
M6							6,99	7,99	8,99	9,99	10,99	11,99
M7							6,99	7,99	8,99	9,99	10,99	11,99
M8	0,99	1,99	2,99	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,99	11,99
N6				3,99	4,99	5,99						
N7	0,99	1,99	2,99	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,99	11,99
N8	0,99	1,99	2,99	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,98	11,98
N9	0,98	1,98	2,98	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,98	11,98
N10	0,98	1,98	2,98	3,98	4,94	5,98	6,98	7,98	8,98	9,98	10,98	11,98
N11	0,98	1,98	2,98	3,98	4,94	5,98	6,98	7,98	8,98	9,98	10,97	11,97
P6	0,99	1,99	2,99								10,98	11,98
P7	0,99	1,99	2,99				6,98	7,98	8,98	9,98	10,98	11,98
P8	0,99	1,99	2,99	3,98	4,98	5,98					10,97	11,97
R6							6,98	7,98	8,98	9,98		
R7				3,98	4,98	5,98	6,98	7,98	8,98	9,98	10,97	11,97
S6				3,98	4,98	5,98					10,97	11,97
S7	0,98	1,98	2,98	3,98	4,98	5,98	6,97	7,97	8,97	9,97	10,97	11,97
U6							6,97	7,97	8,97	9,97		
U7				3,97	4,97	5,97	6,97	7,97	8,97	9,97		
X7				3,97	4,97	5,97						
X8	0,97	1,97	2,97				6,96	7,96	8,96	9,96	10,95	11,95
X9	0,97	1,97	2,97	3,96	4,96	5,96	6,95	7,95	8,95	9,95		
Z7	0,97	1,97	2,97	3,96	4,96	5,96	6,96	7,96	8,96	9,96	10,95	11,95
Z8	0,97	1,97	2,97	3,96	4,96	5,96	6,95	7,95	8,95	9,95	10,94	11,94
Z9				3,95	4,95	5,95						
Z10	0,96	1,96	2,96	3,95	4,95	5,95	6,94	7,94	8,94	9,94	10,93	11,93
ZA7	0,96	1,96	2,96	3,95	4,95	5,95	6,94	7,94	8,94	9,94		
ZA8							6,94	7,94	8,94	9,94	10,93	11,93
ZB8	0,95	1,95	2,95	3,94	4,94	5,94					10,90	11,90
ZB9	0,95	1,95	2,95	3,94	4,94	5,94	6,92	7,92	8,92	9,92	10,90	11,90

Manufacturer's tolerance of the reamers

T = Hole tolerance field

D = Manufacturer's tolerance of the reamer

max. hole-Ø

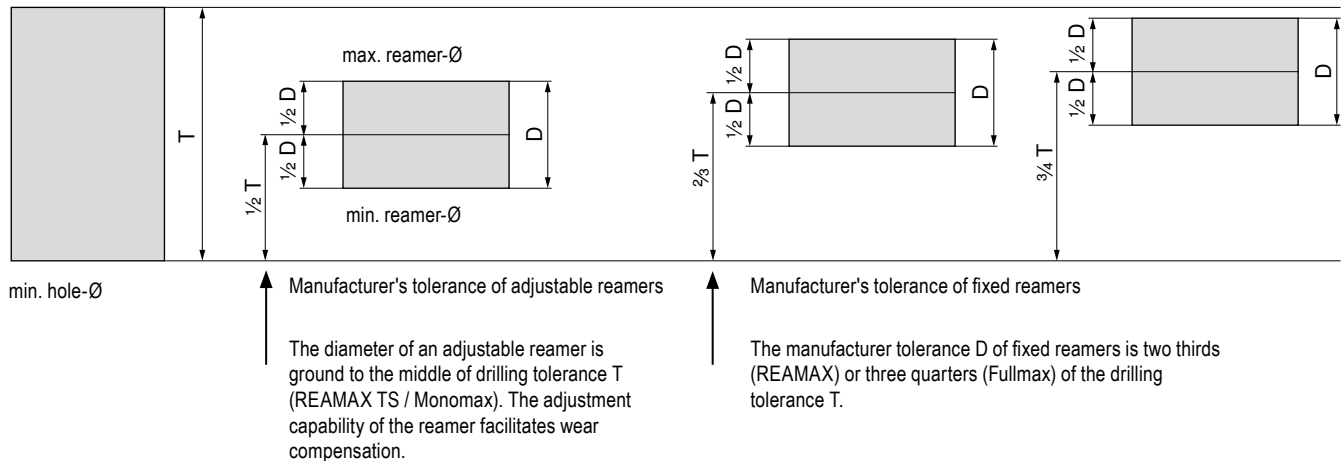

Coatings – Reaming and Countersinking

HPC
TiN

- ▲ Nanostructured TiN multilayer coating
- ▲ Friction-optimised top layer enables process-secure dry hard machining
- ▲ Extreme resistance to oxidation and elevated-temperature hardness
- ▲ Maximum application temperature: 900 °C

TiN

- ▲ TiN coating
- ▲ Maximum application temperature: 450 °C

TiAlN

- ▲ TiAlN multilayer coating
- ▲ Maximum application temperature: 900 °C

TiAlSiN

- ▲ TiAlSiN- Multilayer coating
- ▲ Maximum application temperature: 800 °C
- ▲ Specially designed for machining hardened steels: high hardness and heat resistance with low thermal conductivity.

DBC

- ▲ Diamond-like carbon coating
- ▲ Specially for machining non-ferrous metals
- ▲ Maximum application temperature: 400 °C

DBG-U

- ▲ AlTiN Multilayer coating
- ▲ Especially for universal use in a variety of materials as well as for the machining of tempered materials < 62 HRC
- ▲ For high cutting speeds and suitable for MMS application
- ▲ Maximum application temperature: 1000 °C

DBG-P

- ▲ AlTiN Multilayer coating
- ▲ Especially for universal use in a variety of materials at high cutting speeds
- ▲ Suitable for MMS application
- ▲ Maximum application temperature: 1000 °C

DBC-N

- ▲ Diamond-like ta-C-Multilayer-carbon coating
- ▲ Particularly hard and smooth coating and therefore especially for machining non-ferrous metals
- ▲ Maximum application temperature: 500 °C

DBQ

- ▲ AlCrN-Multilayer-Beschichtung
- ▲ Particularly suitable for machining stainless steels and titanium
- ▲ Low formation of built-up edges
- ▲ Maximum application temperature: > 1000 °C

DBF-A

- ▲ AlCrN Multilayer coating
- ▲ specially developed for the machining of tempered materials < 62 HRC
- ▲ maximum application temperature: > 1100 °C

Grade description – Reamers

DST

- ▲ Cermet, uncoated
- ▲ ISO | **P15** | **M10** | K10
- ▲ The uncoated cermet grade for finish machining stainless and hardened steel
- ▲ Particularly wear resistant thanks to high heat resistance

K10

- ▲ Carbide, uncoated
- ▲ ISO | **K10**
- ▲ Uncoated carbide grade for machining grey cast iron or non-ferrous metals, depending on the cutting edge geometry

CWC10

- ▲ Cermet, uncoated
- ▲ ISO | **P15** | **M10** | K10
- ▲ The uncoated cermet grade for finish machining of stainless and hardened steel
- ▲ Particularly wear-resistant due to high heat resistance

Grade description – Indexable insert countersink

BK8425

- ▲ Carbide, TiAlN/TiN-coated
- ▲ ISO | **P25** | **M25** | **K25**
- ▲ Universal grade with greater wear resistance thanks to innovative PVD multi-layer coating

K10

- ▲ Carbide, uncoated
- ▲ ISO | **K10**
- ▲ Uncoated carbide grade for machining grey cast iron or non-ferrous metals, depending on the cutting edge geometry

Chip breakers

-01

- ▲ Rake angle 12°
- ▲ All-round topography chamfered, rounded
- ▲ Very smooth-cutting thanks to positive cutting edge geometry
- ▲ Also suitable for less-powerful machines and unstable workpieces
- ▲ Easily controllable chip formation also in less solid materials

-G06

- ▲ Rake angle 6°
- ▲ For P / M / K materials
- ▲ High stability due to significant wedge angle

-U877

- ▲ Rake angle 6°
- ▲ circumferentially ground
- ▲ Three-ground chip breaker with second clearance angle for clearance with small tool diameters

-G12

- ▲ Rake angle 12°
- ▲ For P / N / S materials
- ▲ Extremely smooth-cutting thanks to positive cutting edge geometry
- ▲ Extremely suitable for less-powerful machines and unstable workpieces
- ▲ Easily controllable chip formation also in less solid materials



Adapters which are ideal for reaming operations (such as the DAH compensation holder) can be found in the → **Clamping technology catalogue, Chapter 16**