



1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

9 Turning Tools

10 Multifunctional Tools –
EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with
indexable inserts

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples
and article no. Index

Solid drilling and bore machining

Threading

Turning

Milling

Clamping technology

13

Table of contents

Symbol explanation	4
Toolfinder	5
List of contents	6+7
Product programme	8-31
Technical Information:	
Cutting Data	32-40
Formula for cutting data calculation	40
Version description	41
Differences between the milling cutter types	41
Coating	41

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Symbol explanation

Shank



Shank type



Length: extra short / short / medium / long / extra long

Cutting edge preparation



Sharp



Corner chamfer (CHW = chamfer width in mm)



Full Radius



Application



Machining example



The red arrows describe the possible feed directions




Cutting geometry
 $\lambda_s = 30^\circ$ = helix angle
 $\gamma_s = 12^\circ$ = rake angle

ZAFP = Number of flutes


● = Main Application

○ = Extended application


Toolfinder




Finish milling

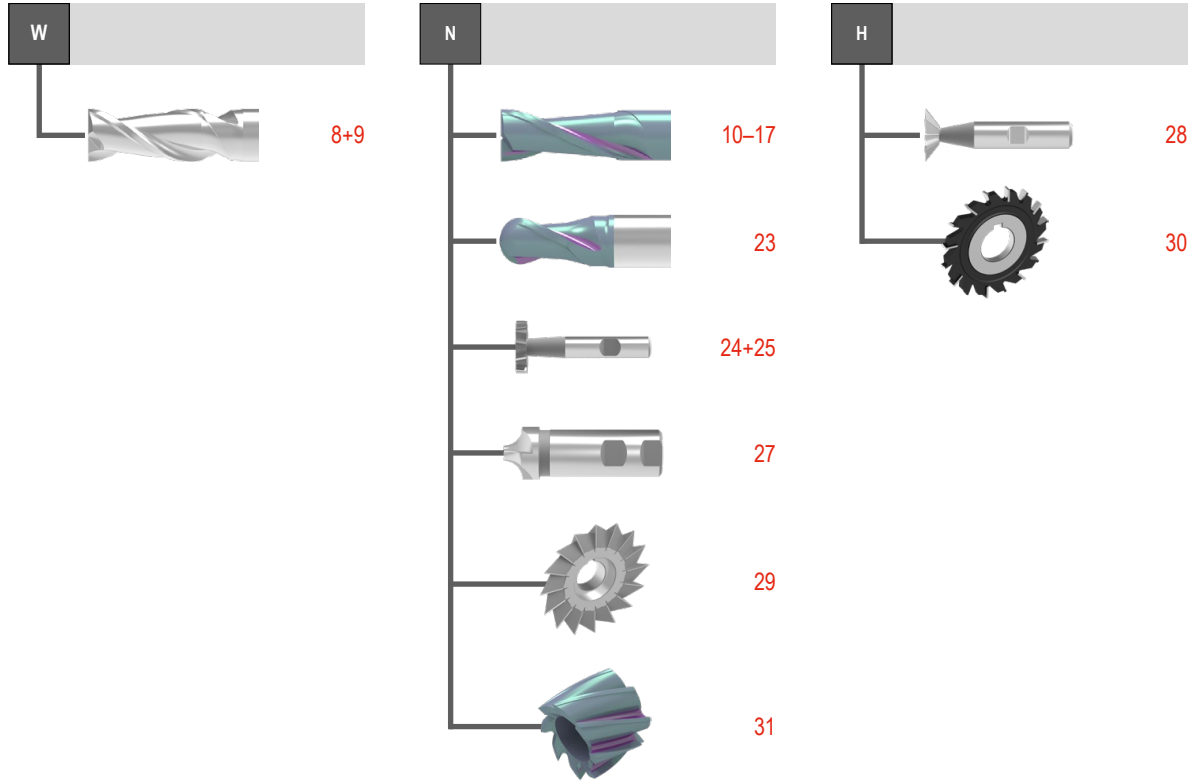

Rough and finish machining

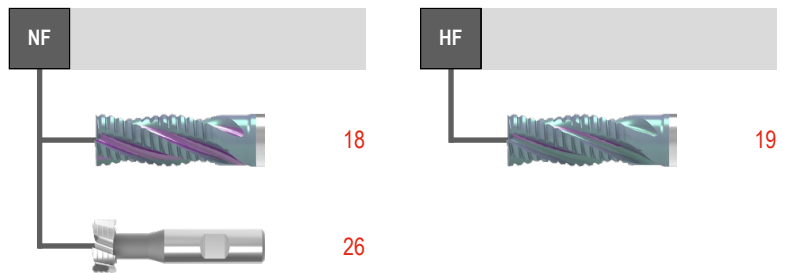

Rough machining

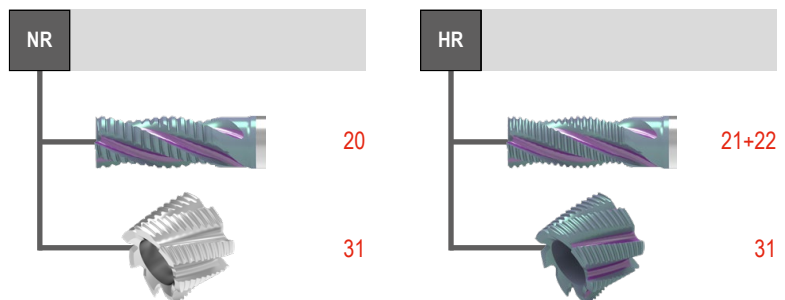




Overview HSS milling cutters

Tool type	ZEFP	Number of flutes	Diameter in mm	Material compatibility							Geometry				Length	Material, e.g. PM = Powdersteel	Coating		WNT \ Performance
				Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Sharp	Corner chamfer	Corner radius	Full Radius			coated	uncoated	
			Ø DC	P	M	K	N	S	H	O									
Finishing cutter																			
	W	2	2-20	●	●	●	●	●	●	●	●	■					HSS-E	<input type="checkbox"/>	8
	W	3-4	2-32	●	●	●	●	●	●	●	●	■					HSS-E	<input type="checkbox"/>	9
	N	2	1-26	●	●	●	○	○	○	○	○	■					HSS-E	<input type="checkbox"/>	10+11
	N	3	1-10	●	●	●	○	○	○	○	○	■					HSS-E	<input type="checkbox"/>	12
	N	3	1,8-22,0	●	●	●	○	○	○	○	○	■					HSS-E	<input type="checkbox"/>	13+14
	N	4	4-20	○	○	○	●	●	●	●	●	■					HSS-E	<input type="checkbox"/>	15
	N	4-8	2-50	●	●	●	○	○	○	○	○	■					HSS-E	<input type="checkbox"/>	16+17
Rough and finish milling cutters																			
	NF	4	6-25	●	○	○	○	○	○	○	○	■					HSS-E	<input type="checkbox"/>	18
	HF	4	6-20	●	○	○	○	○	○	○	○	■					PM	<input type="checkbox"/>	19
Rough milling cutters																			
	NR	3	6-25	●	○	○	○	○	○	○	○	■	■				HSS-E	<input type="checkbox"/>	20
	HR	4-6	6-32	●	○	○	○	○	○	○	○	■	■				PM	<input type="checkbox"/>	21
	HR	3-6	4-32	●	○	○	○	○	○	○	○	■	■				HSS-E	<input type="checkbox"/>	22
Ball nose end milling cutters																			
	N	2	2-30	●	○	○	○	○	○	○	○	■	■	■			HSS-E	<input type="checkbox"/>	23

Overview HSS milling cutters

Tool type	ZEFP	Number of flutes	Diameter in mm	Material compatibility							Form				Length	Material, e.g. PM = Powdersteel	coated	uncoated	Price
				P	M	K	N	S	H	O	Sharp	Corner chamfer	Corner radius	Full Radius					
	N	6-10	11-60	●	○	●	○	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	24		
	N	6-12	10,5-45,5	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	25			
	NF	6-8	21-45	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	26			
	N	4-6	6-16	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	27			
	H	10	16-25	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	28			
	N	14-28	40-125	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	29			
	H	16-48	50-160	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	30			
		7-10	40-80	●	○	●	○	○	○	○	○	○	○	HSS-E	<input type="checkbox"/>	<input type="checkbox"/>	31		

Slot milling cutter HSS-E Co 8

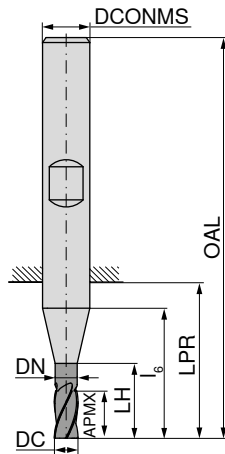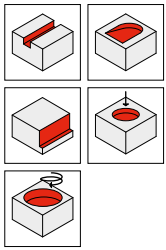

DIN 844



50 144 ...




DC _{ø8}	APMX	DN	LH	l ₆	LPR	OAL	DCONMS _{ø6}	ZEFP
mm	mm	mm	mm	mm	mm	mm	mm	
2,0	7		7	13	15	51	6	2
2,5	8		8	14	16	52	6	2
3,0	8		8	14	16	52	6	2
4,0	11		11	17	19	55	6	2
5,0	13		13	19	21	57	6	2
6,0	13		13	19	21	57	6	2
6,5	16	6,0	22	24	26	66	10	2
8,0	19	7,5	25	27	29	69	10	2
10,0	22	9,5	30	30	32	72	10	2
12,0	26	11,5	36	36	38	83	12	2
14,0	26	11,5	36	36	38	83	12	2
16,0	32	15,0	42	42	44	92	16	2
18,0	32	15,0	42	42	44	92	16	2
20,0	38	19,0	52	52	54	104	20	2

EUR	
U6	
27,46	020
27,46	025
27,46	030
27,46	040
27,46	050
27,46	060
37,01	065
37,01	080
37,01	100
48,92	120
54,38	140
65,72	160
80,87	180
97,56	200

P	
M	
K	
N	•
S	
H	
O	•

→ v_c/f_z Page 33-35

End milling cutter HSS-E Co 8

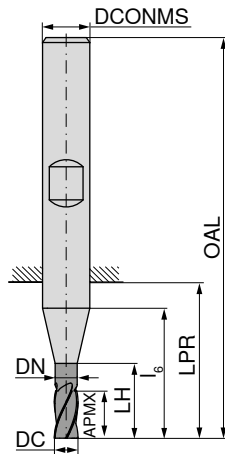

DIN 69844



DIN 844







DC _{k10} mm	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
2	7		7	13	15	51	6	3
3	8		8	14	16	52	6	3
3	12		12	18	20	56	6	3
4	11		11	17	19	55	6	3
4	19		19	25	27	63	6	3
5	13		13	19	21	57	6	3
5	24		24	30	32	68	6	3
6	13	5,5	19	19	21	57	6	3
6	24	5,5	30	30	32	68	6	3
7	16	6,5	22	24	26	66	10	3
7	30	6,5	36	38	40	80	10	3
8	19	7,5	25	27	29	69	10	3
8	38	7,5	44	46	48	88	10	3
9	19	8,5	26	27	29	69	10	3
9	38	8,5	45	46	48	88	10	3
10	22	9,5	30	30	32	72	10	3
10	45	9,5	53	53	55	95	10	3
12	26	11,5	36	36	38	83	12	3
12	53	11,5	63	63	65	110	12	3
14	26	11,5	36	36	38	83	12	3
14	53	11,5	63	63	65	110	12	3
16	32	15,0	42	42	44	92	16	3
16	63	15,0	73	73	75	123	16	3
18	32	15,0	42	42	44	92	16	3
18	63	15,0	73	73	75	123	16	3
20	38	19,0	52	52	54	104	20	3
20	75	19,0	89	89	91	141	20	3
22	38	19,0	52	52	54	104	20	3
22	75	19,0	89	89	91	141	20	3
24	90	23,0	106	108	110	166	25	3
25	45	24,0	63	45	65	121	25	4
25	90	24,0	108	108	110	166	25	4
28	90	24,0	108	108	110	166	25	4
30	90	24,0	108	108	110	166	25	4
32	106	31,0	123	123	126	186	32	4

50 120 ...	50 121 ...
EUR U8	EUR U8
47,55	020
45,63	030
	52,05 030
38,55	040
	53,40 040
38,55	050
	53,40 050
40,86	060
	50,68 060
53,98	070
	76,10 070
48,23	080
	60,94 080
62,59	090
	84,99 090
55,20	100
	68,72 100
64,90	120
	76,10 120
82,12	140
	88,82 140
77,05	160
	93,86 160
127,70	180
	157,20 180
125,20	200
	150,30 200
181,60	220
	225,30 220
	288,30 240
199,50	250
	273,40 250
	308,80 280
	389,40 300
	401,80 320

P	
M	
K	
N	•
S	•
H	
O	•

→ v_c/f_z Page 33-35

Slot milling cutter HSS-E Co 8

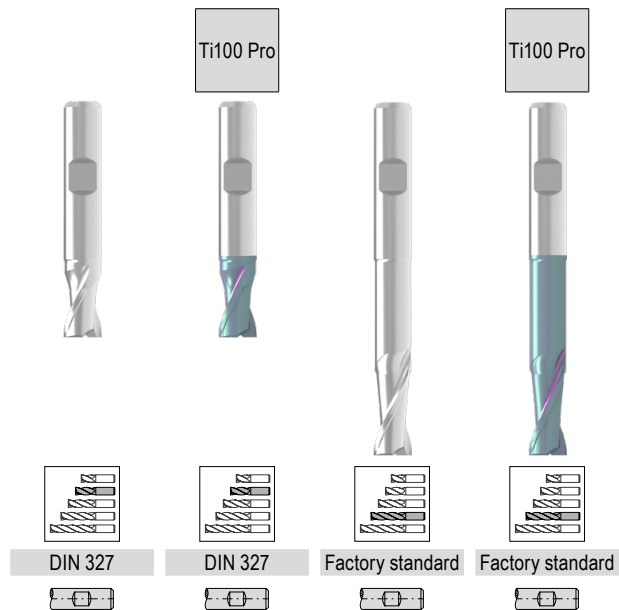
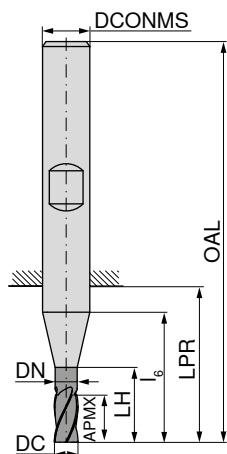




DC mm	DC Tol.	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	50 100 ...		54 025 ...		50 122 ...		54 020 ...	
										EUR U8	010 ¹⁾	EUR U8	010 ¹⁾	EUR U8	030	EUR U8	030
1,0	h10	2,5		2,5	9	11	47	6	2	40,16	010 ¹⁾	45,91	010 ¹⁾				
1,5	h10	3,0		3,0	9	11	47	6	2	37,56	015 ¹⁾	45,91	015 ¹⁾				
1,8	h10	4,0		4,0	10	12	48	6	2	18,46	018	46,86	018				
2,0	e8	4,0		4,0	10	12	48	6	2	22,01	020	38,67	020				
2,5	e8	5,0		5,0	11	13	49	6	2	22,01	025	38,67	025				
3,0	e8	5,0		5,0	11	13	49	6	2	20,09	030	38,67	030				
3,0	e8	8,0		8,0	18	20	56	6	2					32,25	030	56,97	030
3,5	h10	6,0		6,0	12	14	50	6	2	21,86	035	40,45	035				
4,0	e8	7,0		7,0	13	15	51	6	2	20,09	040	34,01	040				
4,0	e8	11,0		11,0	25	27	63	6	2					34,57	040	56,97	040
4,5	h10	7,0		7,0	13	15	51	6	2	25,01	045	40,45	045				
5,0	e8	8,0		8,0	14	16	52	6	2	20,09	050	38,67	050				
5,0	e8	13,0		13,0	30	32	68	6	2					33,50	050	56,97	050
5,5	h10	8,0		8,0	14	16	52	6	2	25,01	055	40,45	055				
6,0	e8	8,0	5,50	14,0	14	16	52	6	2	20,09	060	38,67	060				
6,0	e8	13,0	5,50	30,0	30	32	68	6	2					36,60	060	55,20	060
6,5	h10	10,0	6,00	16,0	18	20	60	10	2	27,59	065	47,67	065				
7,0	e8	10,0	6,50	16,0	18	20	60	10	2	29,38	070	45,91	070				
7,0	e8	16,0	6,35	36,0	38	40	80	10	2					46,04	070	71,61	070
7,5	h10	10,0	7,00	16,0	18	20	60	10	2	31,30	075	47,67	075				
8,0	e8	11,0	7,50	17,0	19	21	61	10	2	26,63	080	45,91	080				
8,0	e8	19,0	7,35	44,0	46	48	88	10	2					40,03	080	70,78	080
8,5	h10	11,0	8,00	18,0	19	21	61	10	2	31,30	085	59,71	085				
9,0	h10	11,0	8,50	18,0	19	21	61	10	2	30,61	090	58,91	090				
9,0	h10	19,0	8,35	45,0	46	48	88	10	2					52,48	090	82,67	090
9,5	h10	11,0	9,00	18,0	19	21	61	10	2	38,39	095	59,71	095				
10,0	e8	13,0	9,50	21,0	21	23	63	10	2	29,24	100	51,52	100				
10,0	e8	22,0	9,35	53,0	53	55	95	10	2					43,44	100	73,51	100
10,5	h10	13,0	10,00	21,0	23	25	70	12	2	54,94	105	69,80	105				
11,0	h10	13,0	10,50	21,0	23	25	70	12	2	47,55	110	63,54	110				
11,0	h10	22,0	10,50	53,0	55	57	102	12	2					60,67	110	88,13	110
11,5	h10	13,0	11,00	21,0	23	25	70	12	2	54,65	115	70,78	115				
12,0	e8	16,0	11,50	26,0	26	28	73	12	2	39,90	120	63,54	120				
12,0	e8	26,0	11,50	63,0	63	65	110	12	2					50,01	120	83,75	120
13,0	h10	16,0	11,50	26,0	26	28	73	12	2	54,65	130	93,73	130				
14,0	e8	16,0	11,50	26,0	26	28	73	12	2	52,05	140	86,35	140				
14,0	e8	26,0	11,50	63,0	63	65	110	12	2					63,40	140	115,70	140
15,0	h10	16,0	11,50	26,0	26	28	73	12	2	63,40	150	93,73	150				
15,0	h10	26,0	11,50	63,0	63	65	110	12	2					78,02	150	130,60	150
16,0	e8	19,0	15,00	29,0	29	31	79	16	2	58,07	160	93,73	160				
16,0	e8	32,0	15,00	73,0	73	75	123	16	2					75,69	160	126,90	160

P	●	●	●	●
M	○	●	○	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

1) Factory standard

Slot milling cutter HSS-E Co 8

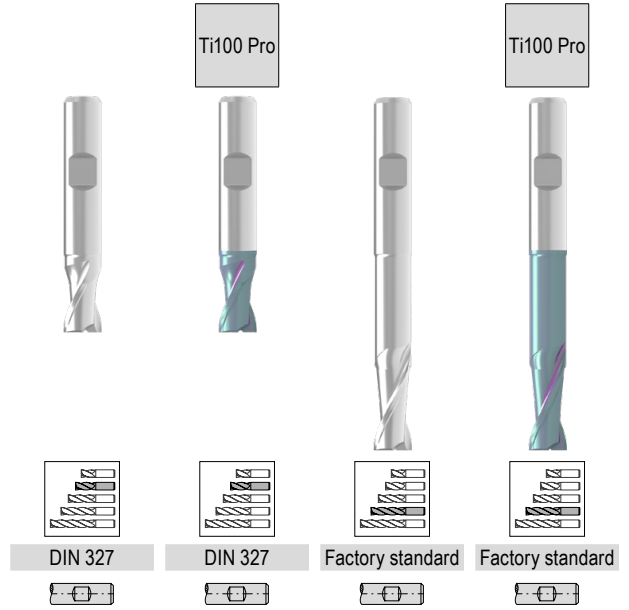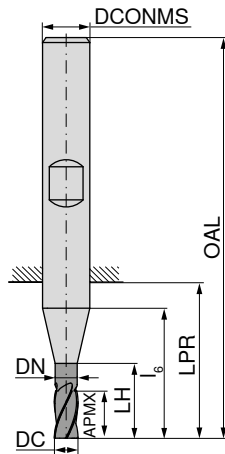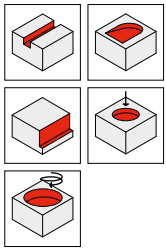

DC	DC Tol.	APMX	DN	LH	l ₆	LPR	OAL	DCONMS _{h6}	ZEFP	50 100 ...		54 025 ...		50 122 ...		54 020 ...	
										EUR	...	EUR	...	EUR	...	EUR	...
17,0	h10	19,0	15,00	29,0	29	31	79	16	2	74,74	170	134,20	170				
18,0	e8	19,0	15,00	29,0	29	31	79	16	2	79,52	180	119,50	180				
18,0	e8	32,0	15,00	73,0	73	75	123	16	2					99,32	180	170,90	180
19,0	h10	19,0	15,00	29,0	29	31	79	16	2	96,46	190	149,00	190				
20,0	e8	22,0	19,00	36,0	36	38	88	20	2	90,05	200	128,60	200				
20,0	e8	38,0	19,00	89,0	89	91	141	20	2					99,75	200	174,90	200
22,0	e8	22,0	19,00	36,0	36	38	88	20	2	110,10	220	183,30	220				
24,0	e8	26,0	23,00	42,0	44	46	102	25	2	143,40	240	222,70	240				
25,0	e8	26,0	24,00	44,0	44	46	102	25	2	136,10	250	221,40	250				
26,0	h10	26,0	24,00	44,0	44	46	102	25	2	165,40	260	287,00	260				





P	●	●	●	●
M	○	●	○	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

1) Factory standard

→ v_c/f_z Page 33-35

Throw-away milling cutter, HSS-E Co 8

▲ Shank similar to DIN 1835 B

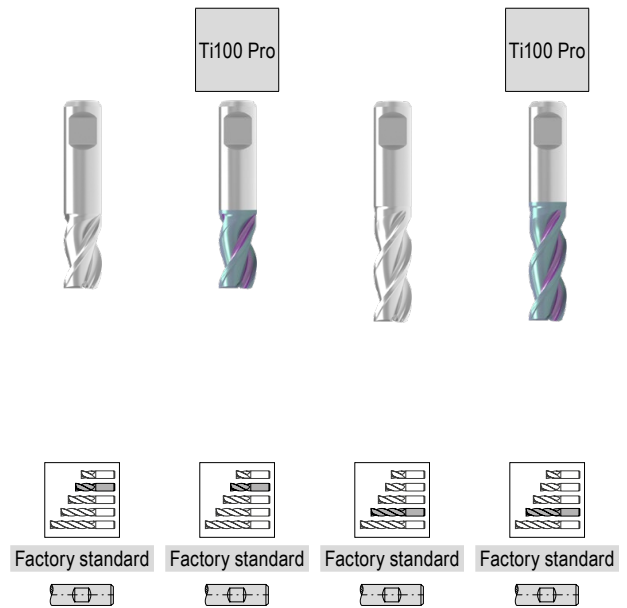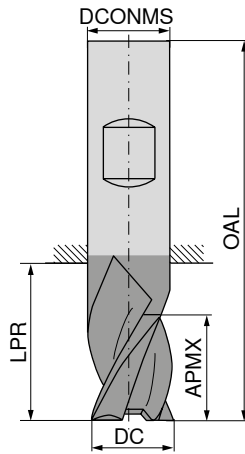

DC _{es} mm	APMX mm	LPR mm	OAL mm	DCONMS ₁₆ mm	ZEFP
1,00	2	8	34	6	3
1,50	3	8	34	6	3
1,50	4	10	35	6	3
1,80	3	8	34	6	3
2,00	4	9	35	6	3
2,00	7	12	38	6	3
2,30	4	9	35	6	3
2,50	5	10	36	6	3
2,50	8	13	39	6	3
2,80	5	10	36	6	3
3,00	5	10	36	6	3
3,00	8	13	39	6	3
3,30	6	11	37	6	3
3,50	6	11	37	6	3
3,50	10	15	41	6	3
3,80	7	12	38	6	3
4,00	7	12	38	6	3
4,00	11	16	42	6	3
4,30	7	12	38	6	3
4,50	7	12	38	6	3
4,50	11	16	42	6	3
4,80	8	13	39	6	3
5,00	8	13	39	6	3
5,00	13	18	44	6	3
5,30	8	13	39	6	3
5,50	8	13	39	6	3
5,50	13	18	44	6	3
5,75	8	13	39	6	3
6,00	8	13	39	6	3
6,00	13	18	44	6	3
6,50	10	14	42	8	3
6,50	16	20	48	8	3
7,00	10	14	42	8	3
7,00	16	20	48	8	3
7,50	10	14	42	8	3
7,50	16	20	48	8	3
8,00	11	15	43	8	3
8,00	19	23	51	8	3
8,50	11	16	48	10	3
8,50	19	24	56	10	3
9,00	11	16	48	10	3
9,00	19	24	56	10	3
9,50	11	16	48	10	3
9,50	19	24	56	10	3
10,00	13	18	50	10	3
10,00	22	27	59	10	3




50 092 ...		54 014 ...		50 093 ...		54 042 ...	
EUR		EUR		EUR		EUR	
U6	010	U8	010	U6	015 ¹⁾	U8	015 ¹⁾
14,62	010	28,95	010			32,38	015 ¹⁾
14,62	015	28,95	015				
				17,08	015 ¹⁾	32,38	015 ¹⁾
14,62	018	28,95	018				
14,62	020	28,95	020				
				17,08	020 ¹⁾	32,38	020
14,62	023	28,95	023				
14,62	025	28,95	025				
				17,08	025 ¹⁾	32,38	025
14,62	028	28,95	028				
14,62	030	28,95	030				
				17,08	030 ¹⁾	32,38	030
14,62	033	28,95	033				
14,62	035	28,95	035				
				17,08	035 ¹⁾	32,38	035
14,62	038	28,95	038				
14,62	040	28,95	040				
				17,08	040 ¹⁾	32,38	040
14,62	043	28,95	043				
14,62	045	28,95	045				
				17,08	045 ¹⁾	32,38	045
14,62	048	28,95	048				
14,62	050	28,95	050				
				17,08	050 ¹⁾	32,38	050
14,62	053	28,95	053				
14,62	055	28,95	055				
				17,08	055 ¹⁾	32,38	055
14,62	057	28,95	057				
14,62	060	28,95	060				
				17,08	060 ¹⁾	32,38	060
16,95	065	39,49	065				
				20,22	065 ¹⁾	43,18	065
16,95	070	39,49	070				
				20,22	070 ¹⁾	43,18	070
16,95	075	39,49	075				
				20,22	075 ¹⁾	43,18	075
16,95	080	39,49	080				
				20,22	080 ¹⁾	43,18	080
22,01	085	45,10	085				
				25,27	085 ¹⁾	48,36	085
22,01	090	45,10	090				
				25,27	090 ¹⁾	48,36	090
22,01	095	45,10	095				
				25,27	095 ¹⁾	48,36	095
22,01	100	45,10	100				
				25,27	100 ¹⁾	48,36	100

P	●	●	●	●
M	○	●	○	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

1) Shank tolerance -0,025 / -0,0323

End milling cutter HSS-E Co 8

▲ ≤ Ø DC 6 mm, 3 cutting edges to centre

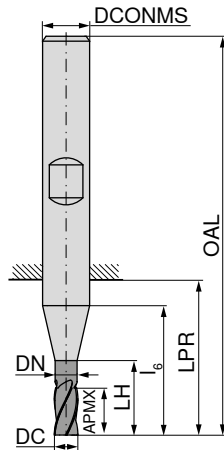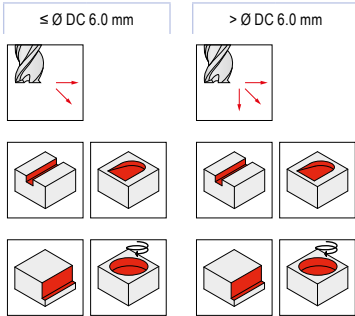





DC mm	DC Tol.	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS mm	ZEFP
1,8	h10	4		4	10	12	48	6	3
2,0	e8	4		4	10	12	48	6	3
2,5	e8	5		5	11	13	49	6	3
3,0	e8	5		5	11	13	49	6	3
3,0	e8	8		8	14	16	52	6	3
3,5	h10	6		6	12	14	50	6	3
3,5	h10	10		10	16	18	54	6	3
4,0	e8	7		7	13	15	51	6	3
4,0	e8	11		11	17	19	55	6	3
4,5	h10	7		7	13	15	51	6	3
4,5	h10	11		11	17	19	55	6	3
5,0	e8	8		8	14	16	52	6	3
5,0	e8	13		13	19	21	57	6	3
5,5	h10	8		8	14	16	52	6	3
5,5	h10	13		13	19	21	57	6	3
6,0	e8	8	5,5	14	14	16	52	6	3
6,0	e8	13	5,5	19	19	21	57	6	3
6,5	h10	10	6,0	16	18	20	60	10	3
6,5	h10	16	6,0	22	24	26	66	10	3
7,0	e8	10	6,5	16	18	20	60	10	3
7,0	e8	16	6,5	22	24	26	66	10	3
7,5	h10	10	7,0	16	18	20	60	10	3
7,5	h10	16	7,0	22	24	26	66	10	3
8,0	e8	11	7,5	17	19	21	61	10	3
8,0	e8	19	7,5	25	27	29	69	10	3
8,5	h10	11	8,0	18	19	21	61	10	3
8,5	h10	19	8,0	26	27	29	69	10	3
9,0	h10	11	8,5	18	19	21	61	10	3
9,0	h10	19	8,5	26	27	29	69	10	3
9,5	h10	11	9,0	18	19	21	61	10	3
9,5	h10	19	9,0	26	27	29	69	10	3
10,0	e8	13	9,5	21	21	23	63	10	3
10,0	e8	22	9,5	30	30	32	72	10	3
10,5	h10	13	10,0	21	23	25	70	12	3
11,0	h10	13	10,5	21	23	25	70	12	3
11,0	h10	22	10,5	30	32	34	79	12	3
11,5	h10	13	11,0	21	23	25	70	12	3
11,5	h10	22	11,0	30	32	34	79	12	3
12,0	e8	16	11,5	26	26	28	73	12	3
12,0	e8	26	11,5	36	36	38	83	12	3

54 021 ...	54 016 ...
EUR U8	EUR U8
47,67	018
39,49	020
39,49	025
39,49	030
	35,93 030
43,18	035
	35,93 035
39,49	040
	35,93 040
43,18	045
	35,93 045
39,49	050
	35,93 050
43,18	055
	35,93 055
39,49	060
	35,93 060
59,71	065
	51,52 065
58,91	070
	51,52 070
59,71	075
	51,52 075
55,20	080
	51,52 080
60,67	085
	51,52 085
58,91	090
	51,52 090
62,44	095
	79,11 095
57,95	100
	51,52 100
71,61	105
67,08	110
	53,16 110
71,61	115
	91,00 115
66,26	120
	62,44 120

P	●	●
M	●	●
K	●	●
N	○	○
S	○	○
H		
O	○	○

End milling cutter HSS-E Co 8

▲ ≤ Ø DC 6 mm, 3 cutting edges to centre

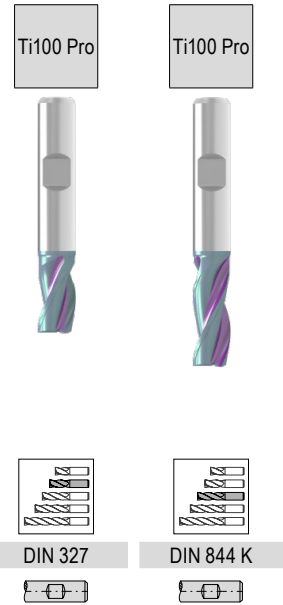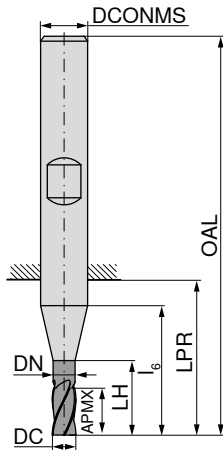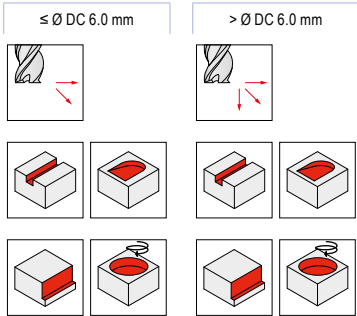



DC mm	DC Tol.	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS mm	ZEFP
13,0	h10	16	11,5	26	26	28	73	12	3
13,0	h10	26	11,5	36	36	38	83	12	3
14,0	e8	16	11,5	26	26	28	73	12	3
14,0	e8	26	11,5	36	36	38	83	12	3
15,0	h10	16	11,5	26	26	28	73	12	3
15,0	h10	26	11,5	36	36	38	83	12	3
15,5	h10	32	15,0	42	42	44	92	16	3
16,0	e8	19	15,0	29	29	31	79	16	3
16,0	e8	32	15,0	42	42	44	92	16	3
17,0	h10	19	15,0	29	29	31	79	16	3
17,0	h10	32	15,0	42	42	44	92	16	3
18,0	e8	19	15,0	29	29	31	79	16	3
18,0	e8	32	15,0	42	42	44	92	16	3
19,0	h10	19	15,0	29	29	31	79	16	3
19,0	h10	32	15,0	42	42	44	92	16	3
19,5	h10	38	19,0	52	52	54	104	20	3
20,0	e8	22	19,0	36	36	38	88	20	3
20,0	e8	38	19,0	52	52	54	104	20	3
22,0	e8	38	19,0	52	52	54	104	20	3

	54 021 ...	54 016 ...
P	●	●
M	●	●
K	●	●
N	○	○
S	○	○
H		
O	○	○

54 021 ...	54 016 ...
EUR U8	EUR U8
97,42	130
130	77,05
140	81,71
150	123,00
155	147,60
160	81,71
170	108,50
180	119,50
190	119,50
195	198,20
200	132,30
200	150,30
220	

→ v_c/f_z Page 33-35

End milling cutter HSS-E Co 8

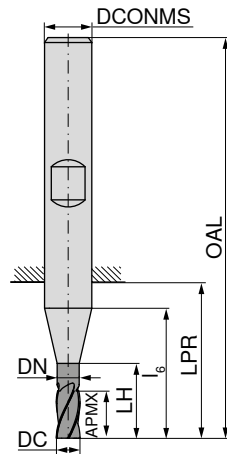

Ti100 Pro



Ti100 Pro



Factory standard



DIN 844



DIN 844



DC mm	DC Tol.	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
4	k10	11		11	17	19	55	6	4
5	k10	13		13	19	21	57	6	4
6	e8	8	5,5	14	14	16	52	6	4
6	k10	13	5,5	19	19	21	57	6	4
8	e8	11	7,5	17	19	21	61	10	4
8	k10	19	7,5	25	27	29	69	10	4
10	e8	13	9,5	21	21	23	63	10	4
10	k10	22	9,5	30	30	32	72	10	4
12	e8	16	11,5	26	26	28	73	12	4
12	k10	26	11,5	36	36	38	83	12	4
14	e8	16	11,5	26	26	28	73	12	4
14	k10	26	11,5	36	36	38	83	12	4
15	k10	26	11,5	36	36	38	83	12	4
16	e8	19	15,0	29	29	31	79	16	4
16	k10	32	15,0	42	42	44	92	16	4
20	e8	22	19,0	36	36	38	88	20	4
20	k10	38	19,0	52	52	54	104	20	4





54 017 ...	50 124 ...	54 011 ...
EUR U8	EUR U8	EUR U8
	46,98 040	66,95 040
	46,98 050	72,56 050
36,77 060	46,98 060	72,56 060
45,91 080	51,91 080	88,55 080
48,79 100	63,79 100	88,55 100
58,91 120	71,05 120	111,30 120
82,67 140	83,48 140	147,60 140
	107,90 150	
84,58 160	95,09 160	161,20 160
119,50 200	139,30 200	231,00 200

P	○	○	○
M	●	●	●
K	○	○	○
N	●	●	●
S	●	●	●
H			
O	●	●	●

→ v_c/f_z Page 33-35

End milling cutter HSS-E Co 8

▲ > Ø 28,0 mm recessed centre

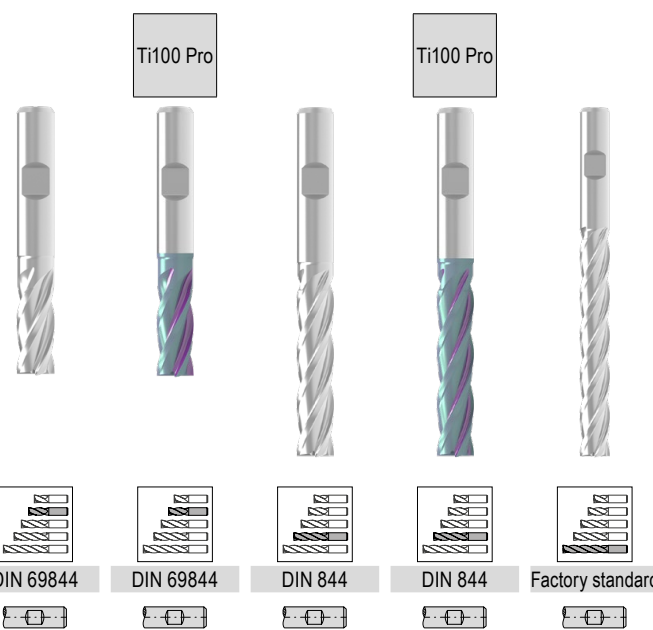
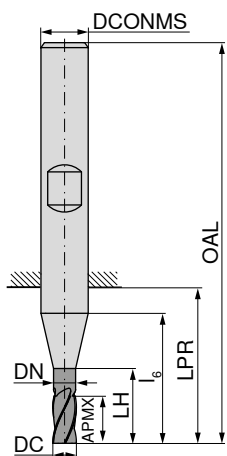
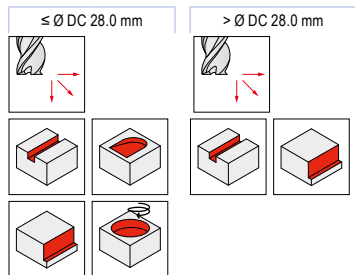



DC mm	APMX mm	DN mm	LH mm	lg mm	LPR mm	OAL mm	DCONMS mm	ZEFP	50 110 ...		54 018 ...		50 111 ...		54 019 ...		50 104 ...	
									EUR U8	020	EUR U8	020	EUR U8	030	EUR U8	030	EUR U6	060
2,0	7		7	13	15	51	6	4	27,33	020	45,10	020						
2,5	8		8	14	16	52	6	4	28,83	025	43,18	025						
3,0	8		8	14	16	52	6	4	27,33	030	42,22	030						
3,0	12		12	18	20	56	6	4					38,13	030	54,24	030		
4,0	11		11	17	19	55	6	4	24,87	040	40,45	040						
4,0	19		19	25	27	63	6	4					37,44	040	54,24	040		
5,0	13		13	19	21	57	6	4	24,87	050	40,45	050						
5,0	24		24	30	32	68	6	4					37,44	050	54,24	050		
6,0	13	5,5	19	19	21	57	6	4	23,10	060	41,25	060						
6,0	24	5,5	30	30	32	68	6	4					33,88	060	53,16	060		
6,0	56	5,5	62	62	64	100	6	4									59,02	060
7,0	16	6,5	22	24	26	66	10	4	32,38	070	56,16	070						
8,0	19	7,5	25	27	29	69	10	4	28,42	080	54,24	080						
8,0	38	7,5	44	46	48	88	10	4					48,09	080	62,44	080		
8,0	70	7,5	73	73	75	115	10	4									66,68	080
9,0	19	8,5	26	27	29	69	10	4	34,71	090	61,62	090						
10,0	22	9,5	30	30	32	72	10	4	32,93	100	56,97	100						
10,0	45	9,5	53	53	55	95	10	4					50,68	100	67,08	100		
10,0	75	9,5	79	79	81	121	10	4									80,36	100
11,0	22	10,5	30	32	34	79	12	4	47,67	110	69,80	110						
12,0	26	11,5	36	36	38	83	12	4	45,63	120	66,26	120						
12,0	53	11,5	63	63	65	110	12	4					54,78	120	79,11	120		
12,0	85		85	85	85	130	12	4									86,78	120
13,0	26	11,5	36	36	38	83	12	4	68,86	130	97,42	130						
14,0	26	11,5	36	36	38	83	12	4	61,20	140	82,67	140						
14,0	53	11,5	63	63	65	110	12	4					70,23	140	104,70	140		
14,0	85		85	85	85	130	12	4									110,10	140
15,0	26	11,5	36	36	38	83	12	4	69,54	150	99,19	150						
15,0	53	11,5	63	63	65	110	12	4					91,14	150	121,20	150		
16,0	32	15,0	42	42	44	92	16	4	63,40	160	97,42	160						
16,0	63	15,0	73	73	75	123	16	4					78,02	160	117,50	160		
16,0	90	15,0	95	95	97	145	16	4									104,70	160
18,0	32	15,0	42	42	44	92	16	4	89,21	180	134,20	180						
18,0	63	15,0	73	73	75	123	16	4					96,59	180	166,70	180		
18,0	100	15,0	110	110	112	160	16	5									192,80	180
20,0	38	19,0	52	52	54	104	20	4	93,60	200	140,80	200						
20,0	75	19,0	89	89	91	141	20	4					111,90	200	174,90	200		
20,0	110	19,0	128	128	130	180	20	5									180,40	200

P	●	●	●	●	●
M	○	●	○	●	○
K	●	●	●	●	●
N	○	○	○	○	○
S	○	○	○	○	○
H					
O	○	○	○	○	○

End milling cutter HSS-E Co 8



▲ > Ø 28,0 mm recessed centre

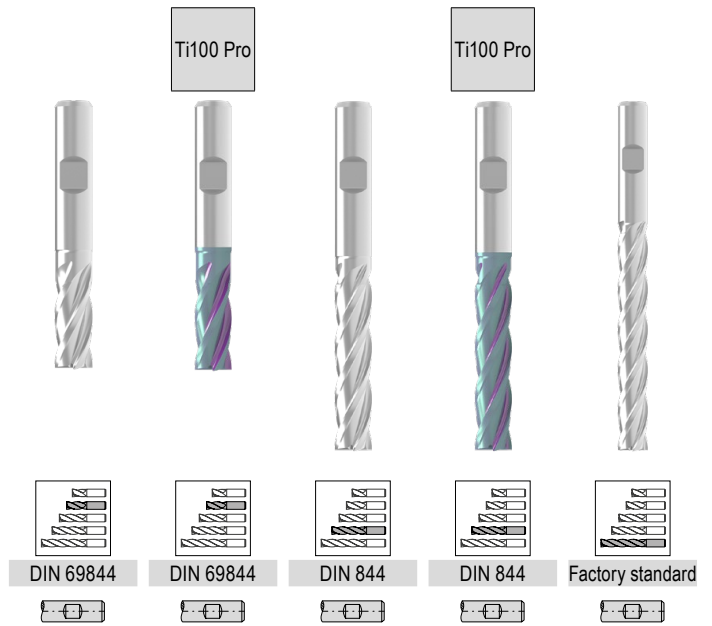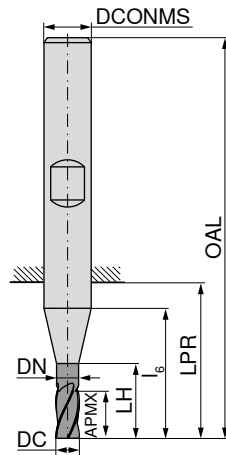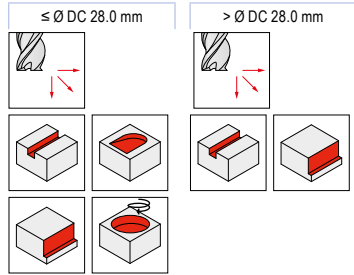

DC mm	APMX mm	DN mm	LH mm	lg mm	LPR mm	OAL mm	DCONMS mm	ZEFP	50 110 ...		54 018 ...		50 111 ...		54 019 ...		50 104 ...		
									EUR U8	220	EUR U8	220	EUR U8	220	EUR U8	220	EUR U6	220	
22,0	38	19,0	52	52	54	104	20	5	129,90	220	187,30	220							
22,0	75	19,0	89	89	91	141	20	5					157,20	220	282,80	220		254,10	220
22,0	110	19,0	128	128	130	180	20	5											
25,0	45	24,0	63	63	65	121	25	5	150,30	250	206,40	250							
25,0	90	24,0	108	108	110	166	25	5					213,30	250	300,70	250		254,10	250
25,0	125	24,0	142	142	144	200	25	6											
28,0	45	24,0	63	63	65	121	25	5	172,10	280	254,10	280							
28,0	90	24,0	108	108	110	166	25	5					252,70	280	393,50	280			
28,0	140	24,0	147	147	149	205	25	6										356,60	280
30,0	45	24,0	63	63	65	121	25	5	240,50	300	301,90	300							
30,0	90	24,0	108	108	110	166	25	5					278,70	300	468,70	300			
32,0	53	31,0	70	70	73	133	32	5											
32,0	53	31,0	70	70	73	133	32	6	233,70	320	287,00	320							
32,0	106	31,0	123	123	126	186	32	6					265,10	320	456,40	320			
32,0	160	31,0	167	167	170	230	32	6										435,90	320
40,0	63	38,0	80	80	85	155	40	6	349,70	400	515,20	400							
40,0	125	38,0	142	142	147	217	40	6					501,60	400	676,30	400			
40,0	180	31,0	197	197	200	260	32	8										725,50	400
50,0	150	48,0	172	172	172	252	50	8					971,50	500	1.082,00	500			
P										●	●	●	●	●	●	●	●	●	●
M										○	●	○	●	○	●	○	○	○	○
K										●	●	●	●	●	●	●	●	●	●
N										○	○	○	○	○	○	○	○	○	○
S										○	○	○	○	○	○	○	○	○	○
H																			
O										○	○	○	○	○	○	○	○	○	○

→ v_c/f_z Page 33-35

Roughing-finishing milling cutter HSS-E Co 5






DC _{k12} mm	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
6	13	5,5	19	19	21	57	6	4
6	24	5,5	30	30	32	68	6	4
7	16	6,5	22	24	26	66	10	4
8	19	7,5	25	27	29	69	10	4
8	38	7,5	44	46	48	88	10	4
9	19	8,5	26	27	29	69	10	4
10	22	9,5	30	30	32	72	10	4
10	45	9,5	53	53	55	95	10	4
11	22	10,5	30	32	32	79	12	4
11	45	10,5	53	55	57	102	12	4
12	26	11,5	36	36	38	83	12	4
12	53	11,5	63	63	65	110	12	4
13	26	11,5	36	36	38	83	12	4
14	26	11,5	36	36	38	83	12	4
16	32	15,0	42	42	44	92	16	4
16	63	15,0	73	73	75	123	16	4
18	32	15,0	42	42	44	92	16	4
20	38	19,0	52	52	54	104	20	4
20	75	19,0	89	89	91	141	20	4
22	38	19,0	52	52	54	104	20	4
22	75	19,0	89	89	91	141	20	4
25	45	24,0	63	63	65	121	25	4
25	90	24,0	108	108	110	166	25	4

	54 028 ...	54 029 ...
P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

54 028 ...	54 029 ...
EUR U8	EUR U8
62,44 060	89,21 060
85,41 070	
80,75 080	104,70 080
91,96 090	
84,58 100	112,00 100
101,10 110	149,00 110
93,73 120	125,00 120
121,20 130	
117,50 140	
128,60 160	169,60 160
174,90 180	
179,00 200	240,50 200
235,10 220	358,00 220
255,60 250	393,50 250

→ v_c/f_z Page 33-35

Powdersteel roughing finishing cutter

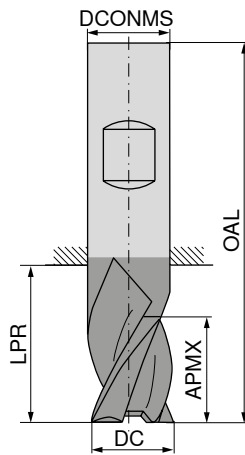

Ti100 Pro



DIN 844



54 034 ...





EUR	
U8	
71,61	060
97,42	080
104,70	100
113,80	120
169,60	160
217,30	200

DC _{k12} mm	APMX mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
6	13	21	57	6	4
8	19	29	69	10	4
10	22	32	72	10	4
12	26	38	83	12	4
16	32	44	92	16	4
20	38	54	104	20	4

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 33-35

Rough milling cutter HSS-E Co 8

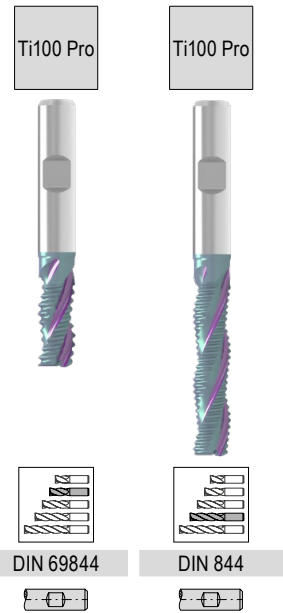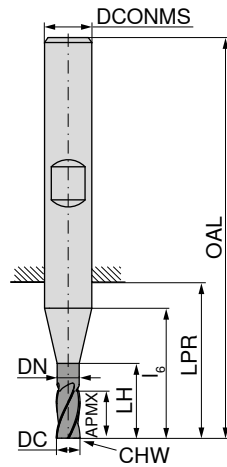





DC _{k12} mm	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS ₁₆ mm	CHW mm	ZEFP
6	13	5,5	19	19	21	57	6	0,5	3
6	24	5,5	30	30	32	68	6	0,5	3
8	19	7,5	25	27	29	69	10	0,7	3
8	38	7,5	44	46	48	88	10	0,7	3
10	22	9,5	30	30	32	72	10	0,7	3
10	45	9,5	53	53	55	95	10	0,7	3
12	26	11,5	36	36	38	83	12	0,7	3
12	53	11,5	63	63	65	110	12	0,7	3
14	26	11,5	36	36	38	83	12	0,9	3
14	53	11,5	63	63	65	110	12	0,9	3
16	32	15,0	42	42	44	92	16	0,9	3
16	63	15,0	73	73	75	123	16	0,9	3
18	32	15,0	42	42	44	92	16	0,9	3
18	63	15,0	73	73	75	123	16	0,9	3
20	38	19,0	52	52	54	104	20	0,9	3
20	75	19,0	89	89	91	141	20	0,9	3
25	45	24,0	63	63	65	121	25	0,9	3
25	90	24,0	108	108	110	166	25	0,9	3

54 026 ...	54 027 ...
EUR U8	EUR U8
62,44	89,21
80,75	104,70
84,58	112,00
93,73	125,00
117,50	150,30
128,60	169,60
174,90	226,90
179,00	240,50
255,60	393,50

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 33-35

Powdersteel Fine rough milling cutter

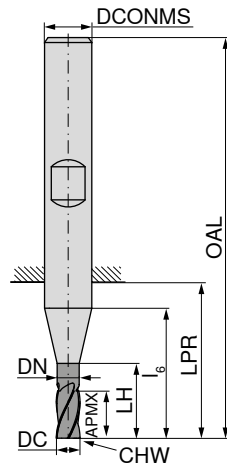

Factory standard

DIN 844

Factory standard



DC _{k12} mm	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS _{h6} mm	CHW mm	ZEFP
6	8	5,5	14	14	16	52	6	0,35	4
6	13	5,5	19	19	21	57	6	0,35	4
8	11	7,5	17	19	21	61	10	0,45	4
8	19	7,5	25	27	29	69	10	0,45	4
8	28	7,5	34	36	38	78	10	0,45	4
10	13	9,5	21	21	23	63	10	0,45	4
10	22	9,5	30	30	32	72	10	0,45	4
10	34	9,5	42	42	44	84	10	0,45	4
12	16	11,5	26	26	28	73	12	0,60	4
12	26	11,5	36	36	38	83	12	0,60	4
12	40	11,5	50	50	52	97	12	0,60	4
14	16	11,5	26	26	28	73	12	0,60	4
14	26	11,5	36	36	38	83	12	0,60	4
14	40	11,5	50	50	52	97	12	0,60	4
16	19	15,0	29	29	31	79	16	0,70	4
16	32	15,0	42	42	44	92	16	0,70	4
16	48	15,0	58	58	60	108	16	0,70	4
18	19	15,0	29	29	31	79	16	0,70	4
18	32	15,0	42	42	44	92	16	0,70	4
18	48	15,0	58	58	60	108	16	0,70	4
20	22	19,0	36	36	38	88	20	0,70	4
20	38	19,0	52	52	54	104	20	0,70	4
20	56	19,0	70	70	72	122	20	0,70	4
22	22	19,0	36	36	38	88	20	0,70	4
22	38	19,0	52	52	54	104	20	0,70	4
22	56	19,0	70	70	72	122	20	0,70	4
25	26	24,0	44	44	46	102	25	0,70	4
25	45	24,0	63	63	65	121	25	0,70	4
25	68	24,0	86	86	88	144	25	0,70	4
32	32	31,0	49	49	52	112	32	0,90	6
32	53	31,0	70	70	73	133	32	0,90	6





54 031 ...	54 032 ...	54 033 ...
EUR U8	EUR U8	EUR U8
81,71		
91,96		
91,96		120,20
108,50		128,90
139,30		150,30
153,10		196,80
183,30		225,30
206,40		278,70
275,90		282,80
325,20		393,50
434,50		441,40
	469,90	

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 33-35

Fine profile milling cutter HSS-E Co 8



▲ > Ø 28,0 mm recessed centre

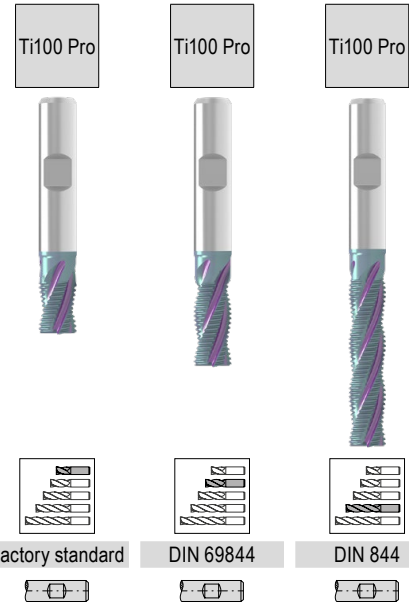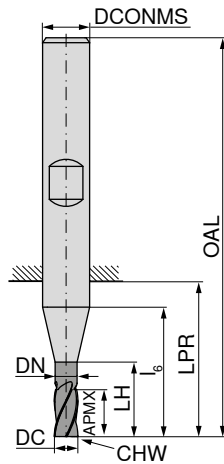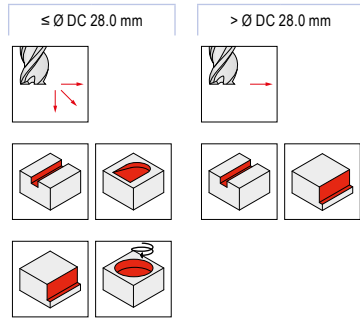

DC mm	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS mm	CHW mm	ZEFP	54 022 ...		54 023 ...		54 024 ...	
										EUR	U8	EUR	U8	EUR	U8
4	11		11	17	19	55	6	0,35	3						
5	13		13	19	21	57	6	0,35	3						
6	8	5,5	14	14	16	52	6	0,35	4	65,17	060				
6	13	5,5	19	19	21	57	6	0,35	4			52,33	060		
6	24	5,5	30	30	32	68	6	0,35	4					99,19	060
8	11	7,5	17	19	21	61	10	0,45	4	80,75	080				
8	19	7,5	25	27	29	69	10	0,45	4			57,95	080		
8	38	7,5	44	46	48	88	10	0,45	4					117,50	080
10	13	9,5	21	21	23	63	10	0,45	4	71,61	100				
10	22	9,5	30	30	32	72	10	0,45	4			62,44	100		
10	45	9,5	53	53	55	95	10	0,45	4					123,00	100
12	16	11,5	26	26	28	73	12	0,60	4	88,13	120				
12	26	11,5	36	36	38	83	12	0,60	4			73,51	120		
12	53	11,5	63	63	65	110	12	0,60	4					138,00	120
14	16	11,5	26	26	28	73	12	0,60	4	112,00	140				
14	26	11,5	36	36	38	83	12	0,60	4			82,67	140		
14	53	11,5	63	63	65	110	12	0,60	4					158,50	140
16	19	15,0	29	29	31	79	16	0,70	4	117,50	160				
16	32	15,0	42	42	44	92	16	0,70	4			95,51	160		
16	63	15,0	73	73	75	123	16	0,70	4					185,80	160
18	19	15,0	29	29	31	79	16	0,70	4	153,10	180				
18	32	15,0	42	42	44	92	16	0,70	4			117,50	180		
18	63	15,0	73	73	75	123	16	0,70	4					226,90	180
20	22	19,0	36	36	38	88	20	0,70	4	158,50	200				
20	38	19,0	52	52	54	104	20	0,70	4			139,30	200		
20	75	19,0	89	89	91	141	20	0,70	4					263,70	200
22	38	19,0	52	52	54	114	20	0,70	4			176,40	220		
22	75	19,0	89	89	91	141	20	0,70	4					360,80	220
25	45	24,0	63	63	65	121	25	0,70	4			189,90	250		
25	90	24,0	108	108	110	166	25	0,70	4					422,20	250
28	45	24,0	63	63	65	121	25	0,90	5			288,30	280		
28	90	24,0	108	108	110	166	25	0,90	5					531,60	280
30	45	24,0	63	63	65	121	25	0,90	5			247,30	300		
30	90	24,0	108	108	110	166	25	0,90	5					579,40	300
32	53	31,0	70	70	73	133	32	0,90	6			295,20	320		
32	106	31,0	123	123	126	186	32	0,90	6					590,20	320
P											●		●		●
M											●		●		●
K											●		●		●
N											○		○		○
S											○		○		○
H															
O											○		○		○

→ v_c/f_z Page 33-35

Ball nosed end milling cutter HSS-E Co 8

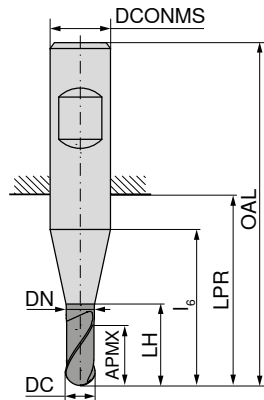

Ti100 Pro



Factory standard

Factory standard

Factory standard





DC _{h10} mm	APMX mm	DN mm	LH mm	l ₆ mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
2	4		4	10	12	48	6	2
3	5		5	11	13	49	6	2
3	8		8	18	20	56	6	2
4	7		7	13	15	51	6	2
4	11		11	25	27	63	6	2
5	8		8	14	16	52	6	2
5	13		13	30	32	68	6	2
6	8	5,50	14	14	16	52	6	2
6	13	5,50	30	30	32	68	6	2
7	10	6,50	16	18	20	60	10	2
7	16	6,35	36	38	40	80	10	2
8	11	7,50	17	19	21	61	10	2
8	19	7,35	44	46	48	88	10	2
9	11	8,50	18	19	21	61	10	2
9	19	8,35	45	46	48	88	10	2
10	13	9,50	21	21	23	63	10	2
10	22	9,35	53	53	55	95	10	2
11	13	10,50	21	23	25	70	12	2
11	22	10,50	53	55	57	102	12	2
12	16	11,50	26	26	28	73	12	2
12	26	11,50	63	63	65	110	12	2
13	16	11,50	26	26	28	73	12	2
14	16	11,50	26	26	28	73	12	2
14	26	11,50	63	63	65	110	12	2
15	16	11,50	26	26	28	73	12	2
15	26	11,50	63	63	65	110	12	2
16	19	15,50	29	29	31	79	16	2
16	32	15,00	73	73	75	123	16	2
18	19	15,50	29	29	31	79	16	2
18	32	15,00	73	73	75	123	16	2
20	22	19,00	36	36	38	88	20	2
22	22	19,00	36	36	38	88	20	2
24	26	23,00	42	44	46	102	25	2
24	45	23,00	106	108	110	166	25	2
25	26	24,00	44	44	46	102	25	2
25	45	24,00	108	108	110	166	25	2
26	26	24,00	44	44	46	102	25	2
28	26	24,00	44	44	46	102	25	2
30	26	24,00	44	44	46	102	25	2
30	45	24,00	108	108	110	166	25	2

50 320 ...	54 041 ...	50 321 ...
EUR U8	EUR U8	EUR U8
020	58,91	020
030	42,78	030
040	57,95	63,54
050	42,78	63,54
060	42,78	67,08
070	57,78	75,43
080	46,86	68,44
090	54,24	80,06
100	53,98	85,67
110	62,71	92,51
120	60,53	87,17
130	69,68	134,20
140	70,78	123,00
150	82,52	101,30
160	85,81	131,60
180	107,00	131,80
201	113,80	166,70
220	146,20	
240	149,00	247,30
250	149,00	
260	217,30	232,20
280	205,00	
300	236,50	336,10

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

T-slot milling cutter HSS-E Co 5, cross pitched

▲ For slots according to DIN 650

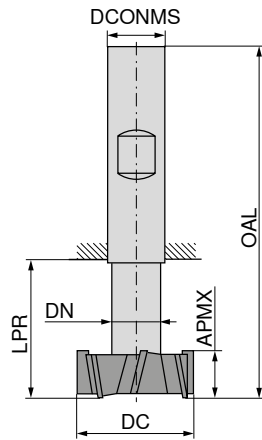

DIN 851 A



50 240 ...

DC _{d11} mm	APMX _{d11} mm	DN _{h12} mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	EUR	
11,0	4	4	13,5	53,5	10	6	104,70	110
12,5	6	5	17,0	57,0	10	6	101,30	125
16,0	8	7	22,0	62,0	10	6	111,90	160
18,0	8	8	25,0	70,0	12	6	117,40	180
19,0	9	8	26,0	71,0	12	6	142,10	190 ¹⁾
21,0	9	10	29,0	74,0	12	6	146,20	210
22,0	10	10	30,0	75,0	12	6	150,30	220 ¹⁾
25,0	11	12	34,0	82,0	16	8	176,40	250
28,0	12	13	37,0	85,0	16	8	211,80	280 ¹⁾
32,0	14	15	42,0	90,0	16	8	239,10	320
36,0	16	17	47,0	103,0	25	8	359,40	360 ¹⁾
40,0	18	19	52,0	108,0	25	10	404,40	400
45,0	20	21	57,0	113,0	25	10	449,60	450 ¹⁾
50,0	22	25	64,0	124,0	32	10	494,70	500
60,0	28	30	79,0	139,0	32	10	661,30	600



P	●
M	○
K	●
N	○
S	○
H	
O	○

1) Factory standard

Slot milling cutter HSS-E Co 5, cross-pitched

▲ For slots according to DIN 6888

▲ $CDX = a_{p\max}$

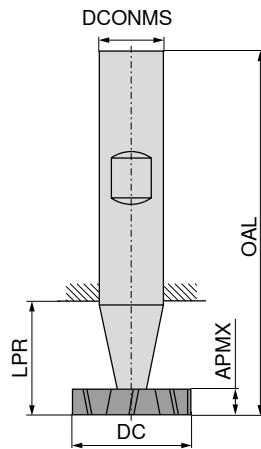

DIN 850



50 234 ...



DC _{h12} mm	APMX _{e8} mm	LPR mm	OAL mm	DCONMS _{h6} mm	CDX mm	ZEFP	EUR U6	
10,5	2,0	14	50	6	3,25	6	79,66	100
10,5	2,5	14	50	6	3,15	6	79,66	101
10,5	3,0	14	50	6	3,15	6	79,66	102
13,5	2,0	16	56	10	4,45	6	79,66	130 ¹⁾
13,5	3,0	16	56	10	4,45	6	79,66	132
13,5	4,0	16	56	10	4,45	6	79,66	133
16,5	3,0	16	56	10	5,95	6	86,78	161
16,5	4,0	16	56	10	5,95	6	86,78	162
16,5	5,0	16	56	10	5,75	6	86,78	163
19,5	3,0	23	63	10	6,95	8	95,63	190 ¹⁾
19,5	4,0	23	63	10	6,95	8	95,63	191
19,5	5,0	23	63	10	6,75	8	95,63	192
22,5	4,0	23	63	10	8,25	8	113,50	220 ¹⁾
22,5	5,0	23	63	10	8,25	8	113,50	221
22,5	6,0	23	63	10	8,00	8	113,50	222
25,5	5,0	23	63	10	9,00	10	113,50	250 ¹⁾
25,5	6,0	23	63	10	9,00	10	113,50	251
28,5	6,0	23	63	10	10,00	10	166,70	281
28,5	8,0	23	63	10	10,00	10	166,70	283
32,5	6,0	26	71	12	12,00	10	169,60	321 ¹⁾
32,5	8,0	26	71	12	12,00	10	169,60	322
38,5	8,0	26	71	12	13,35	10	251,50	381 ¹⁾
45,5	10,0	26	71	12	16,85	12	306,10	450

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) Factory standard

T-slot milling cutter HSS-E Co 5

▲ For slots according to DIN 650

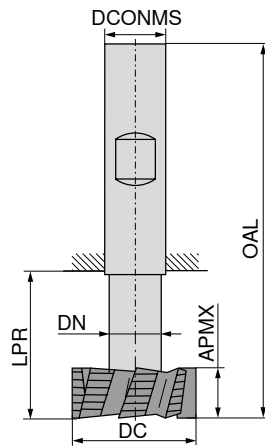

DIN 851 A



50 241 ...



EUR
U6

DC _{d11} mm	APMX mm	DN _{h12} mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP	
21	9	10	29	74	12	6	169,60 210
22	10	10	30	75	12	6	187,30 220 ¹⁾
25	11	12	34	82	16	6	202,20 250
28	12	13	37	85	16	6	221,40 280 ¹⁾
32	14	15	42	90	16	6	278,70 320
36	16	17	47	103	25	6	340,20 360 ¹⁾
40	18	19	52	108	25	8	439,90 400
45	20	21	57	113	25	8	460,40 450 ¹⁾

P	●
M	○
K	●
N	○
S	○
H	○
O	○

1) Factory standard

Quarter-round profile milling cutter HSS-E Co 5, concave

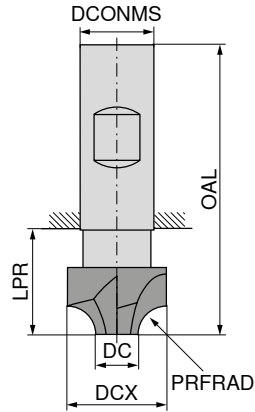

50 248 ...

EUR U6




61,36	010
75,02	015
69,54	020
78,30	025
71,18	030
92,09	040
95,63	050
124,70	060
166,70	080
176,40	090
203,50	100
310,20	120
426,20	150
501,60	160

PRFRAD _{H11} mm	DCX mm	DC mm	LPR mm	OAL mm	DCONMS _{h6} mm	ZEFP
1,0	8	6	20	60	10	4
1,5	9	6	20	60	10	4
2,0	10	6	20	60	10	4
2,5	11	6	20	60	10	4
3,0	12	6	15	60	12	4
4,0	14	6	15	60	12	4
5,0	16	6	15	60	12	4
6,0	20	8	19	67	16	4
8,0	24	8	23	71	16	4
9,0	26	8	29	85	25	4
10,0	28	8	29	85	25	4
12,0	34	10	34	90	25	4
15,0	46	16	44	100	25	6
16,0	48	16	44	100	25	6

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 36

Single angle milling cutters HSS-E Co 5


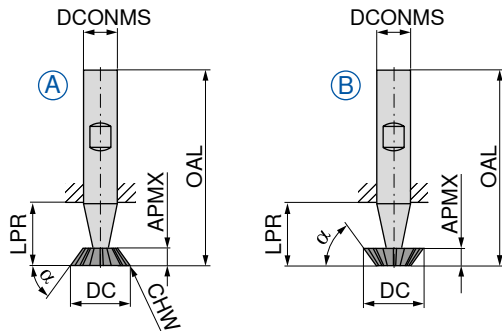



α°	DC mm	APMX mm	LPR mm	OAL mm	DCONMS _{ns} mm	CHW mm	ZEFP	Fig.	DIN 1833	
									50 246 ...	50 245 ...
45	16	4,0	15	60	12	0,3	10	A	EUR U6	
	16	4,0	15	60	12		10	B	104,70	016
	20	5,0	18	63	12	0,3	10	A		
	20	5,0	18	63	12		10	B	140,80	020
	25	6,3	22	67	12	0,3	10	A		
	25	6,3	22	67	12		10	B	162,70	025
60	16	6,3	15	60	12	0,3	10	A		
	16	6,3	15	60	12		10	B	104,70	116
	20	8,0	18	63	12	0,3	10	A		
	20	8,0	18	63	12		10	B	133,70	120
	25	10,0	22	67	12	0,3	10	A		
	25	10,0	22	67	12		10	B	162,70	125
70	16	7,0	15	60	12	0,3	10	A		104,70 216 ¹⁾
	20	9,0	18	63	12	0,3	10	A		133,70 220 ¹⁾
	25	11,0	19	67	16	0,3	10	A		162,70 225 ¹⁾
P									●	●
M									○	○
K									●	●
N									○	○
S									○	○
H										
O									○	○

1) Factory standard




Double angle milling cutter HSS

▲ with keyway to DIN 138



Shell type single angle milling cutter HSS

▲ with keyway to DIN 138



DIN 847

50 360 ...

PNA °	DC mm	OAH mm	DCONMS mm	ZEFP	EUR U6	
45	50	8	16	22	169,60	045
	63	10	22	24	211,80	145
	80	12	27	26	336,10	245
	100	18	32	28	501,60	345
60	50	10	16	18	169,60	060
	63	14	22	20	211,80	160
	80	18	27	22	389,40	260
	100	25	32	24	624,40	360
90	50	14	16	16	198,20	090
	63	20	22	18	252,70	190
	80	22	27	20	414,10	290
	100	32	32	24	690,10	390
120	50	14	16	16	225,30	120 1)
	63	20	22	16	328,00	121 1)

P	●
M	○
K	●
N	○
S	○
H	○
O	○

1) Factory standard

→ v_c/f_z Page 37

DIN 842 A

50 362 ...



KAPR °	DC mm	OAH mm	DCONMS mm	CHW mm	ZEFP	EUR U6	
45	40	10	10	0,3	14	195,40	045
	50	13	13	0,3	16	267,80	145
	63	18	16	0,3	18	337,60	245
	80	22	22	0,3	20	476,80	345
	100	28	27	0,3	22	724,20	445
50	50	16	13	0,3	16	267,80	150
60	40	13	10	0,3	14	172,10	060
	50	16	13	0,3	16	211,80	160
	63	20	16	0,3	18	291,20	260
	80	25	22	0,3	20	476,80	360
	100	32	27	0,3	22	724,20	460
	125	40	32	0,3	28	1.193,00	560

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 37

Side and face milling cutter HSS-E Co 5

- ▲ Fine cross-pitched version
- ▲ with keyway to DIN 138



DIN 885 A

50 349 ...


DC mm	OAH mm	DCONMS mm	ZEFP	EUR U6	
50	4	16	16	155,80	100
50	5	16	16	155,80	102
50	6	16	16	166,70	104
50	8	16	16	176,40	106
50	10	16	16	194,00	108
63	4	22	18	170,90	200
63	5	22	18	181,60	202
63	6	22	18	174,90	204
63	8	22	18	196,80	206
63	10	22	18	220,10	208
63	12	22	18	248,70	210
63	14	22	18	280,10	212
80	5	27	20	229,60	300
80	6	27	20	236,50	302
80	8	27	20	247,30	304
80	10	27	18	251,50	306
80	12	27	18	284,30	308
80	14	27	18	329,30	310
80	16	27	18	356,60	312
80	18	27	18	412,60	314
80	20	27	18	412,60	316
100	6	32	22	332,00	400
100	8	32	22	329,30	402
100	10	32	20	355,20	404
100	12	32	20	382,50	406
100	14	32	20	426,20	408
100	16	32	20	452,30	410
100	18	32	20	527,40	412
100	20	32	20	531,60	414
100	25	32	20	658,70	418
125	8	32	24	438,60	500
125	10	32	22	469,90	502
125	12	32	22	508,30	504
125	14	32	22	571,00	506
125	16	32	22	593,10	508
125	18	32	22	684,40	510
125	20	32	22	695,60	512
125	25	32	22	833,50	516
160	10	40	26	699,60	600
160	12	40	26	762,30	602
160	14	40	26	819,90	604
160	16	40	26	882,60	606
160	18	40	26	970,10	608
160	20	40	26	971,50	610
160	25	40	26	1.209,00	614
160	32	40	26	1.520,00	618

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 38

Narrow side and face milling cutter HSS-E Co 5

- ▲ Fine cross-pitched version
- ▲ with keyway to DIN 138

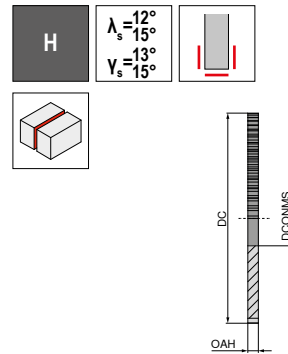

DIN 1834 A

50 340 ...



DC mm	OAH mm	DCONMS mm	ZEFP	EUR U6	
63	1,6	22	28	134,40	200
63	2,0	22	28	115,90	202
63	2,5	22	28	118,30	204
63	3,0	22	28	121,30	206
80	1,6	27	32	139,30	300
80	2,0	27	32	136,10	302
80	2,5	27	32	138,00	304
80	3,0	27	32	142,10	306
80	4,0	27	32	153,10	310
100	1,6	32	36	169,60	400
100	2,0	32	36	168,00	402
100	2,5	32	36	168,00	404
100	3,0	32	36	170,90	406
100	4,0	32	36	181,60	410
100	5,0	32	36	199,50	414
125	1,6	32	40	220,10	500
125	2,0	32	40	211,80	502
125	2,5	32	40	218,60	504
125	3,0	32	40	222,70	506
125	4,0	32	40	236,50	510
125	5,0	32	40	252,70	514
125	6,0	32	40	280,10	516
160	2,0	40	48	349,70	600
160	2,5	40	48	337,60	602
160	3,0	40	48	343,00	604
160	4,0	40	48	366,10	606
160	5,0	40	48	385,40	608
160	6,0	40	48	416,70	610
160	8,0	40	36	472,80	612

P	●
M	○
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 38

Face milling cutters HSS-E Co 5

▲ with keyway to DIN 138



DIN 1880

50 250 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	8	217,30	040
50	36	22	8	284,30	050
63	40	27	8	390,80	063
80	45	27	10	590,20	080



P	●
M	●
K	●
N	●
S	○
H	●
O	●

→ v_c/f_z Page 39+40

Roughing face milling cutters HSS-E Co 5

▲ with keyway to DIN 138

▲ Manufacturing tolerance lies on the plus range of the tolerance js14



DIN 1880

50 260 ...



DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	7	221,40	040
50	36	22	8	292,40	050
63	40	27	8	393,50	063
80	45	27	10	552,10	080

P	●
M	●
K	●
N	●
S	○
H	●
O	●

→ v_c/f_z Page 39+40

Face milling cutters HSS-E Co 5

▲ with keyway to DIN 138



Ti100
Pro

DIN 1880

54 035 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	8	310,20	040
50	36	22	8	397,70	050
63	40	27	8	504,10	063
80	45	27	10	752,90	080



P	●
M	●
K	●
N	●
S	○
H	●
O	●

→ v_c/f_z Page 39+40

Roughing-finishing face milling cutters HSS-E Co 8

▲ with keyway to DIN 138

▲ Manufacturing tolerance lies on the plus range of the tolerance js14



Ti100
Pro

DIN 1880

54 037 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	7	310,20	040
50	36	22	8	388,00	050
63	40	27	8	599,80	063
80	45	27	10	880,00	080

P	●
M	●
K	●
N	●
S	○
H	●
O	●

→ v_c/f_z Page 39+40


Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment	Tensile strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C Annealed	420 N/mm ² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C Annealed	640 N/mm ² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3	< 0,45 % C Tempered	840 N/mm ² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C Annealed	910 N/mm ² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5	< 0,75 % C Tempered	1010 N/mm ² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1	Annealed	610 N/mm ² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2	Tempered	930 N/mm ² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3	Tempered	1010 N/mm ² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4	Tempered	1200 N/mm ² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1	Annealed	680 N/mm ² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2	Hardened and tempered	1100 N/mm ² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3	Hardened and tempered	1300 N/mm ² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic Annealed	680 N/mm ² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic Tempered	1010 N/mm ² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic Quenched	610 N/mm ² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)	780 N/mm ² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic	350 N/mm ² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)	500 N/mm ² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic	540 N/mm ² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic	845 N/mm ² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic	440 N/mm ² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic	780 N/mm ² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable	60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable Age-hardened	340 N/mm ² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable	250 N/mm ² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable Age-hardened	300 N/mm ² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable	440 N/mm ² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %	375 N/mm ² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn	300 N/mm ² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper	340 N/mm ² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys	70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
	S	Heat-resistant alloys	S.1.1	Fe - basis Annealed	680 N/mm ² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865
S.1.2			Fe - basis Age-hardened	950 N/mm ² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
S.2.1			Ni or Co basis Annealed	840 N/mm ² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
S.2.2			Ni or Co basis Age-hardened	1180 N/mm ² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
S.2.3			Ni or Co basis Cast	1080 N/mm ² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
Titanium alloys		S.3.1	Pure titanium	400 N/mm ²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys Age-hardened	1050 N/mm ² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
S.3.3	Beta alloys	1400 N/mm ² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al		
H	Hardened steel	H.1.1	Hardened and tempered	46–55 HRC				
		H.1.2	Hardened and tempered	56–60 HRC				
		H.1.3	Hardened and tempered	61–65 HRC				
		H.1.4	Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1	Cast	400 HB				
	Hardened cast iron	H.3.1	Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic	≤ 150 N/mm ²				
		O.1.2	Plastics, thermoplastic	≤ 100 N/mm ²				
		O.2.1	Aramid fibre-reinforced	≤ 1000 N/mm ²				
		O.2.2	Glass/carbon-fibre reinforced	≤ 1000 N/mm ²				
		O.3.1	Graphite					

* Tensile strength

Cutting speeds – slot, end milling and ball-nosed end milling cutters

Index	Kf fz	uncoated	Ti100 Pro	Ti100 Pro	● 1st choice ○ suitable		
				Powder steel	Emulsion	Compressed air	MMS
		vc (m/min)					
P.1.1	1,2	20	45	50	●		
P.1.2	1,2	20	45	50	●		
P.1.3	1,2	20	45	50	●		
P.1.4	1,0	15	30	35	●		
P.1.5	1,0	15	30	35	●		
P.2.1	1,2	20	40	45	●		
P.2.2	1,0	15	40	45	●		
P.2.3	0,8	15	30	35	●		
P.2.4	0,8	15	30	35	●		
P.3.1	1,0	15	30	35	●		
P.3.2	0,8	12	25	30	●		
P.3.3	0,8	10	20	25	●		
P.4.1	1,0	10	20	25	●		
P.4.2	1,0	10	20	25	●		
M.1.1	1,0	10	20	25	●		
M.2.1	0,9	7	15	20	●		
M.3.1	1,0	5	10	15	●		
K.1.1	1,0	18	35	40	●		
K.1.2	1,0	18	25	30	●		
K.2.1	1,0	15	30	35	●		
K.2.2	1,0	15	30	35	●		
K.3.1	1,0	15	35	40	●		
K.3.2	0,8	12	25	30	●		
N.1.1	1,9	150	240	260	●		
N.1.2	1,9	100	130	150	●		
N.2.1	1,8		100	140	●		
N.2.2	1,7		60	80	●		
N.2.3							
N.3.1	1,1		100	130	●		
N.3.2	1,2	30	60	80	●		
N.3.3	1,2	30	60	80	●		
N.4.1	1,8	90	140	160		●	
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1	1,0	10	15	25	●		
S.3.2	1,1	10	15	25	●		
S.3.3							
H.1.1							
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1							
O.1.1	2,0	30	50	70	●		
O.1.2	2,0	20	25	40	●		
O.2.1							
O.2.2							
O.3.1	1,0		30	40	○		

 For full slot milling reduce the cutting speed (Vc), indicated in this table by approx. 15 - 20%!
Kf fz = Correction factor for feed per tooth

Feed per tooth for HSS end mills

Approximate values (in mm) for the feed per tooth (f_z)

Ø DC mm	Finish milling						Rough machining					
	Peripheral milling						Full slot milling					
	$a_e = 0,1 \times DC$		$a_e = 0,25 \times DC$		$a_e = 0,2-0,3 \text{ mm}$		$a_e = 0,25 \times DC$		$a_e = 0,6 \times DC$		$a_e = DC$	
$a_p = 1,5 \times DC$		$a_p = 1,5 \times DC$		$a_p = 1,5 \times DC$		$a_p = 1,5 \times DC$		$a_p = 1,5 \times DC$		$a_p = DC$		
f_z in mm		f_z in mm		f_z in mm		f_z in mm		f_z in mm		f_z in mm		
uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	
2	0,008	0,009	0,008	0,009	0,008	0,009						
3	0,011	0,012	0,009	0,010	0,010	0,012						
4	0,017	0,018	0,013	0,014	0,014	0,015	0,015	0,016	0,013	0,014	0,011	0,012
5	0,024	0,026	0,014	0,015	0,018	0,020	0,019	0,021	0,016	0,018	0,014	0,016
6	0,032	0,035	0,015	0,017	0,022	0,024	0,024	0,027	0,020	0,022	0,018	0,019
8	0,047	0,051	0,020	0,022	0,029	0,032	0,032	0,036	0,027	0,030	0,024	0,026
10	0,065	0,072	0,026	0,028	0,037	0,041	0,042	0,047	0,035	0,039	0,031	0,034
12	0,084	0,091	0,031	0,034	0,044	0,049	0,051	0,057	0,043	0,047	0,037	0,041
14	0,100	0,106	0,037	0,041	0,054	0,059	0,063	0,069	0,053	0,058	0,045	0,050
16	0,111	0,121	0,042	0,046	0,061	0,067	0,072	0,079	0,060	0,066	0,052	0,057
18	0,126	0,136	0,048	0,053	0,070	0,077	0,084	0,093	0,071	0,078	0,061	0,067
20	0,141	0,151	0,052	0,057	0,076	0,083	0,092	0,101	0,077	0,084	0,066	0,073
22	0,160	0,166	0,059	0,065	0,085	0,094	0,104	0,114	0,087	0,096	0,075	0,082
25	0,170	0,188	0,065	0,072	0,095	0,104	0,117	0,129	0,098	0,108	0,084	0,093
28	0,196	0,210	0,075	0,083	0,109	0,120	0,136	0,150	0,114	0,125	0,098	0,108
32	0,212	0,240	0,086	0,094	0,124	0,137	0,157	0,173	0,131	0,145	0,113	0,125
36	0,224	0,240	0,099	0,109	0,144	0,159	0,170	0,194	0,142	0,162	0,126	0,140
40	0,240	0,240	0,108	0,119	0,157	0,173	0,184	0,202	0,154	0,169	0,132	0,146
45	0,240	0,240	0,108	0,119	0,157	0,173	0,200	0,220	0,170	0,180	0,140	0,160
50	0,240	0,240	0,108	0,119	0,157	0,173	0,200	0,220	0,170	0,180	0,140	0,160

Attention: In the case of uncoated milling cutters climb milling is preferred to conventional milling. When using coated milling cutters climb milling is necessary in order to achieve optimum results.

Feed rate correction: Please multiply the f_z value in the table above with the corresponding **correction factor Kf f_z** from the table on → **page 33**.

In general the following is valid:
 f_z (milling) = $f_z \times Kf f_z$
 f_z (drilling) = f_z (milling) ÷ no. of teeth

Feed per tooth when milling parallel key slots with HSS slot drills

Approximate values (in mm) for the feed per tooth (f_z)

Ø DC mm	Full slot milling (in one cut)		Profile slot milling (internal profile milling)				Circular ramping			
			Roughing cut		Finishing cut					
	f_z in mm		f_z in mm				f_z in mm			
	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated
2	0,005	0,006	0,005	0,006	0,008	0,009	0,003	0,003	0,002	0,002
3	0,009	0,010	0,009	0,010	0,015	0,016	0,004	0,005	0,003	0,003
4	0,012	0,013	0,012	0,013	0,022	0,024	0,006	0,007	0,004	0,004
5	0,016	0,017	0,016	0,017	0,030	0,033	0,008	0,009	0,005	0,006
6	0,020	0,022	0,020	0,022	0,039	0,043	0,010	0,011	0,007	0,007
8	0,026	0,029	0,026	0,029	0,055	0,061	0,013	0,014	0,009	0,010
10	0,034	0,037	0,034	0,037	0,075	0,082	0,017	0,019	0,011	0,012
12	0,040	0,044	0,040	0,044	0,093	0,101	0,020	0,022	0,013	0,015
14	0,049	0,054	0,049	0,054	0,117	0,118	0,024	0,027	0,016	0,018
16	0,056	0,062	0,056	0,062	0,135	0,135	0,028	0,031	0,019	0,021
18	0,065	0,072	0,065	0,072	0,151	0,151	0,033	0,036	0,022	0,024
20	0,071	0,078	0,071	0,078	0,167	0,167	0,035	0,039	0,024	0,026
22	0,080	0,088	0,080	0,088	0,184	0,184	0,040	0,044	0,027	0,029
25	0,089	0,098	0,089	0,098	0,208	0,208	0,044	0,049	0,030	0,033
28	0,103	0,113	0,103	0,113	0,233	0,233	0,051	0,056	0,034	0,037
32	0,118	0,130	0,118	0,130	0,260	0,260	0,060	0,065	0,040	0,043
36	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043
40	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043
45	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043
50	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043


Attention:
In the case of uncoated milling cutters climb milling is preferred to conventional milling. When using coated milling cutters climb milling is necessary in order to achieve optimum results.

Feed rate correction:
Please multiply the f_z value in the table above with the corresponding **correction factor Kf** f_z from the table on → **page 33**.

In general the following is valid:
 f_z (milling) = $f_z \times Kf$
 f_z (drilling) = f_z (milling) \div no. of teeth


Cutting data standard values – Form cutters

Index	v _c (m/min)	50 241 ...			50 240 ...					v _c (m/min)	50 234 ...				50 248 ...				● 1st choice ○ suitable		
		Ø DC (mm) =			Ø DC (mm) =						Ø DC (mm) =				Ø DCX (mm) =				Emulsion	Compressed air	MMS
		21-25	28-36	40-45	11-16	18-22	25-32	36-45	50-60		10-17	19-26	28-33	33-46	8-11	12-24	26-34	46-48			
		f _z (mm)			f _z (mm)						f _z (mm)				f _z (mm)						
P.1.1	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.1.2	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.1.3	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.1.4	22	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	22	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.1.5	22	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	22	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.2.1	22	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	22	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.2.2	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.2.3	20	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	20	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.2.4	20	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	20	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.3.1																					
P.3.2																					
P.3.3																					
P.4.1	10	0,06	0,08	0,1	0,01	0,025	0,025	0,025	0,03	10	0,02	0,025	0,03	0,04	0,02	0,045	0,08	0,09	●		
P.4.2	10	0,06	0,08	0,1	0,01	0,025	0,025	0,025	0,03	10	0,02	0,025	0,03	0,04	0,02	0,045	0,08	0,09	●		
M.1.1	10	0,06	0,08	0,1	0,01	0,025	0,025	0,025	0,03	10	0,02	0,025	0,03	0,04	0,02	0,045	0,08	0,09	●		
M.2.1																					
M.3.1																					
K.1.1	28	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	24	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.1.2																					
K.2.1	22	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	22	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.2.2	20	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	20	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.3.1	15	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	15	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.3.2	15	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	15	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
N.1.1	100	0,1	0,12	0,15	0,02	0,045	0,045	0,045	0,055	90	0,03	0,04	0,06	0,07	0,035	0,07	0,14	0,15	●		
N.1.2	100	0,1	0,12	0,15	0,02	0,045	0,045	0,045	0,055	90	0,03	0,04	0,06	0,07	0,035	0,07	0,14	0,15	●		
N.2.1	80	0,09	0,11	0,13	0,015	0,04	0,035	0,04	0,045	80	0,03	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.2.2	60	0,09	0,11	0,13	0,015	0,04	0,035	0,04	0,045	60	0,03	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.2.3																					
N.3.1	25	0,08	0,1	0,12	0,015	0,04	0,035	0,03	0,035	25	0,02	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.3.2	25	0,08	0,1	0,12	0,015	0,04	0,035	0,03		25	0,02	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.3.3	25	0,08	0,1	0,12	0,015	0,04	0,035	0,03		25	0,02	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.4.1	70	0,1	0,12	0,15	0,018	0,04	0,03	0,035	0,045	70	0,03	0,035	0,05	0,06	0,025	0,06	0,1	0,12	●		
S.1.1																					
S.1.2																					
S.2.1																					
S.2.2																					
S.2.3																					
S.3.1	20	0,06	0,08	0,1	0,012	0,025	0,025	0,025	0,035	20	0,015	0,025	0,035	0,045	0,02	0,05	0,07	0,09	●		
S.3.2																					
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1	65	0,12	0,15	0,18		0,06	0,055	0,055	0,07	65	0,04	0,05	0,07	0,09	0,045	0,1	0,18	0,18	●		
O.1.2	80	0,12	0,15	0,18		0,06	0,055	0,055	0,07	80	0,04	0,05	0,07	0,09	0,045	0,1	0,18	0,18	●		
O.2.1																					
O.2.2																					
O.3.1																					

 The cutting data depends largely on the external conditions, e.g. stability of the tools and tool clamping, material and machine type. The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.


Cutting data standard values – Form cutters

Index	v _c (m/min)	50 245 ... / 50 246 ...			v _c (m/min)	50 360 ...				50 362 ...				● 1st choice ○ suitable		
		Ø DC (mm) =				Ø DC (mm) =				Ø DC (mm) =				Emulsion	Compressed air	MMS
		16	20	25		50	63	80	100	40-50	63	80	100			
		a _e = 3,2	a _e = 4	a _e = 5		a _e = 5	a _e = 6,3	a _e = 8	a _e = 10	f _z (mm)						
f _z (mm)			f _z (mm)				f _z (mm)									
P.1.1	28	0,01	0,015	0,018	22	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.1.2	28	0,01	0,015	0,018	22	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.1.3	28	0,01	0,015	0,018	22	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.1.4	22	0,01	0,015	0,018	20	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
P.1.5	22	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.2.1	22	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.2.2	28	0,01	0,015	0,018	22	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
P.2.3	20	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.2.4	20	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.3.1																
P.3.2																
P.3.3																
P.4.1	10	0,007	0,01	0,012	10	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
P.4.2	10	0,007	0,01	0,012	10	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
M.1.1	10	0,007	0,01	0,012	10	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
M.2.1																
M.3.1																
K.1.1	24	0,01	0,012	0,015	19	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.1.2					12	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.2.1	22	0,01	0,012	0,015	15	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.2.2	20	0,01	0,012	0,015	12	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.3.1	15	0,01	0,012	0,015	16	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.3.2	15	0,01	0,012	0,015	13	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
N.1.1	90	0,01	0,015	0,02										●		
N.1.2	90	0,01	0,015	0,02	70	0,012	0,015	0,02	0,024	0,008	0,012	0,014	0,018	●		
N.2.1	80	0,01	0,015	0,02	60	0,012	0,015	0,02	0,024	0,008	0,012	0,014	0,018	●		
N.2.2	60	0,01	0,015	0,02	60	0,012	0,015	0,02	0,024	0,008	0,012	0,014	0,018	●		
N.2.3																
N.3.1	25	0,01	0,015	0,02	20	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,012	●		
N.3.2	25	0,01	0,015	0,02	20	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,012	●		
N.3.3	25	0,01	0,015	0,02	20	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,012	●		
N.4.1	70	0,01	0,015	0,0175	45	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,01	●		
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1	20	0,008	0,01	0,015	20	0,008	0,01	0,012	0,016	0,005	0,007	0,009	0,012	●		
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1	65	0,018	0,02	0,025	60	0,015	0,02	0,025	0,03	0,008	0,012	0,018	0,022	●		
O.1.2	80	0,018	0,02	0,025	65	0,015	0,02	0,025	0,03	0,008	0,012	0,018	0,022	●		
O.2.1																
O.2.2																
O.3.1																

 The cutting data depends largely on the external conditions, e.g. stability of the tools and tool clamping, material and machine type. The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting data – side and face cutters

Index	v _c (m/min)	50 340 ... / 50 349 ...						● 1st choice ○ suitable		
		Ø DC (mm) =						Emulsion	Compressed air	MMS
		50	63	80	100	125	160			
f (mm)										
P.1.1	30	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
P.1.2	20	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
P.1.3	20	0,025–0,035	0,030–0,040	0,035–0,045	0,040–0,050	0,047–0,060	0,050–0,065	●		
P.1.4	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.1.5	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.2.1	20	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.2.2	20	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.2.3	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.2.4	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.3.1	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.3.2	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.3.3	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.4.1	10	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.4.2	10	0,020–0,030	0,025–0,035	0,030–0,040	0,035–0,045	0,040–0,050	0,045–0,100	●		
M.1.1	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
M.2.1	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
M.3.1	8	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.1.1	20	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.1.2	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.2.1	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.2.2	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.3.1	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.3.2	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
N.1.1	150	0,030–0,037	0,037–0,045	0,045–0,050	0,050–0,060	0,060–0,067	0,067–0,075	●		
N.1.2	100	0,030–0,037	0,037–0,045	0,045–0,050	0,050–0,060	0,060–0,067	0,067–0,075	●		
N.2.1	80	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
N.2.2	40	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
N.2.3										
N.3.1	80	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
N.3.2	30	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
N.3.3	30	0,025–0,035	0,030–0,040	0,035–0,045	0,040–0,050	0,047–0,060	0,050–0,065	●		
N.4.1	90	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060		●	
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1	10	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
S.3.2	10	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1	30	0,040–0,050	0,050–0,060	0,060–0,070	0,070–0,080	0,080–0,090	0,090–0,100	●		
O.1.2	20	0,040–0,050	0,050–0,060	0,060–0,070	0,070–0,080	0,080–0,090	0,090–0,100	●		
O.2.1										
O.2.2										
O.3.1										

 Feed correction factor (Kf f_z) for side and face cutters in relation to the cutting depth (a_e)


a _e	Kf f _z
0,05 x DC	1,4
0,1 x DC	1,0
0,15 x DC	0,8
0,2 x DC	0,7
0,25 x DC	0,6

Cutting data – face mills

Index	Kf fz	50 250 ... / 50 260 ...	54 035 ... / 54 037 ...	● 1st choice ○ suitable		
		uncoated	Ti100 Pro	Emulsion	Compressed air	MMS
		v _c (m/min)	v _c (m/min)			
P.1.1	1,2	25	45	●		
P.1.2	1,2	20	40	●		
P.1.3	1,2	20	40	●		
P.1.4	1,0	15	30	●		
P.1.5	1,0	15	30	●		
P.2.1	1,2	20	40	●		
P.2.2	1,0	20	40	●		
P.2.3	0,8	10	20	●		
P.2.4	0,8	10	20	●		
P.3.1	1,0	15	30	●		
P.3.2	0,8	10	20	●		
P.3.3	0,8	10	20	●		
P.4.1	1,0	10	15	●		
P.4.2	1,0	10	15	●		
M.1.1	1,0	10	15	●		
M.2.1	0,9	7	15	●		
M.3.1	1,0	5	10	●		
K.1.1	1,0	20	30	●		
K.1.2	1,0	18	30	●		
K.2.1	1,0	18	30	●		
K.2.2	1,0	15	25	●		
K.3.1	1,0	18	30	●		
K.3.2	1,0	18	30	●		
N.1.1	1,5	150				
N.1.2	1,5	100				
N.2.1	1,3	80				
N.2.2	1,3	40				
N.2.3						
N.3.1	1,1	80	110	●		
N.3.2	1,2	30	60	●		
N.3.3	1,2	30	60	●		
N.4.1	1,3	90	120		●	
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1	1,0	10	15	●		
S.3.2	1,1	10	15	●		
S.3.3	0,8		10	●		
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1	2,0	30	50	●		
O.1.2	2,0	20	25	●		
O.2.1						
O.2.2						
O.3.1						

Feed per tooth for HSS face mills

Approximate values (in mm) for the feed per tooth (f_z)

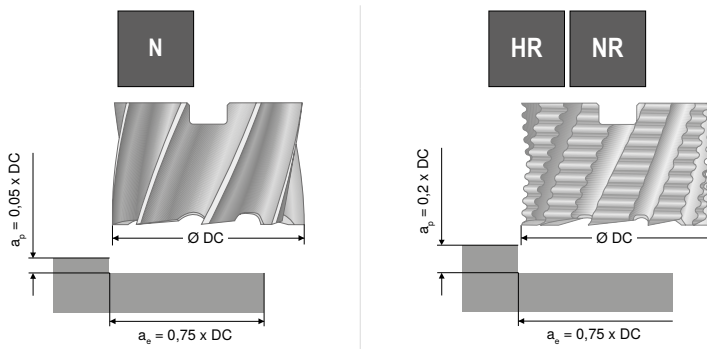

Ø DC mm	f_z in mm		f_z in mm	
	uncoated	Ti100 Pro	uncoated	Ti100 Pro
40	0,049	0,054	0,064	0,070
50	0,055	0,060	0,071	0,078
63	0,061	0,067	0,079	0,087
80	0,065	0,071	0,084	0,092



Feed rate correction:

Please multiply the f_z value in the table above with the corresponding **correction factor Kf f_z** from the table on → **page 33**.

In general the following is valid:

$$f_z \text{ (milling)} = f_z \times Kf f_z$$

$$f_z \text{ (drilling)} = f_z \text{ (milling)} \div \text{no. of teeth}$$

Formula for cutting data calculation

Designation	Abbreviation	Unit	Formula
Number of revolutions	n	min ⁻¹	$n = \frac{v_c \times 1000}{DC \times \pi}$
Cutting speed	v_c	m/min	$v_c = \frac{DC \times \pi \times n}{1000}$
Feed per tooth	f_z	mm	$f_z = \frac{v_f}{ZEFP \times n}$ $f_z = h_m \times \sqrt{\frac{DC}{a_e}}$
Feed per revolution	f	mm	$f = f_z \times ZEFP$
Feed rate	v_f	mm/min.	$v_f = f_z \times ZEFP \times n$
Average chip thickness	h_m	mm	$h_m = f_z \times \sqrt{\frac{a_e}{DC}}$

ZEFP = Number of flutes





a_e = cutting width (for side milling cutter cutting depth)

DC = Cutting diameter

Version description

W	For soft materials and non-ferrous metals (aluminium, copper, brass)	NF	For machining steel and cast materials, as well as stainless steels – with roughing-finishing profile
N	For machining steel and cast materials, as well as stainless steels	HF	For high-strength steels and tempered materials – with roughing-finishing profile
H	For high-strength steels and tempered materials	NR	For machining steel and cast materials, as well as stainless steels – with roughing profile
		HR	For high-strength steels and tempered materials – with roughing profile

Differences between the milling cutter types

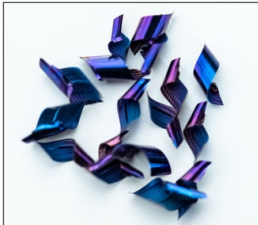Designation	Type	Shape of the chip breaker	Application description	Chip shape
Rough and finish milling cutters	NF		<ul style="list-style-type: none"> ▲ High chip volume, even on less powerful machines ▲ Surface quality mostly sufficient ▲ Lower cutting pressure compared to smooth-edged milling cutters ▲ Finish machining not needed 	
	HF			
Rough milling cutters	NR		<ul style="list-style-type: none"> ▲ Produces very small and short chips ▲ Problem-solver in unstable conditions ▲ High chip volume, even on the weakest machines ▲ Exceptionally well suited to full slot milling ▲ Additional finish machining needed ▲ High feeds possible 	
	HR			

Coating

Ti100 Pro	<ul style="list-style-type: none"> ▲ Ti multilayer coating ▲ HV_{0.05} = 3500 ▲ Coefficient of friction (against steel) = 0.7 ▲ Maximum application temperature: 900°C
------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------