New products for machining technicians

NEW

MonsterMill – Ball Nosed Cutter

NCR

→ Page 39

Our specialist for 3D milling and machining of nickel-based alloys.

NEW

MonsterMill – FRP-CR / FRP

FRP CR FRP

→ Page 52–56

The new MonsterMill – specially designed for machining plastics.

NEW

CircularLine – CCR-VA

CCR VA

→ Page 67+68

The perfect addition to our CircularLine, now also for machining stainless steels.

NEW

CircularLine – CCR-AL 5xDC

CCR AL

→ Page 74

Even bigger! The CircularLine 5xDC for even deeper trochoidal machining.

NEW

SilverLine – programme extension

N

→ Page 129–150

Addition to the all-rounder range, the SilverLine.

Programme extension – Micro cutters

N

→ Page 186–192

Even more diameters have been added to the Micro cutter range.

NEW

Programme Extension

N

→ Page 241–281

New outstanding products in our standard range.

NEW

Rough and finish milling cutters

NTR

→ Page 257

The new type NTR roughing-finishing milling cutter

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples

Table of contents

Symbol explanation 4

Toolfinder for High Performance Milling Cutters 5–9

List of contents 10–18

Product programme 19–320

Technical Information

- Selection guide for cutters for plastic, fiberglass, carbon fibre 309
- Cutting Data 321–485
- Approximate feed rates 486
- Trochoidal Milling 487
- General references 488–496
- Version description 497
- Coatings 498

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Shank

Shank type

Length: extra short / short / medium / long / extra long

Axial thro' coolant

Radial thro' coolant

Cutting edge preparation

Sharp

Corner chamfer (CHW = chamfer width in mm)

Corner radius

Full Radius

Application

HPC — High volume machining

HFC — High-feed milling

54–70 HRC — Hard materials

Machining example

The red arrows describe the possible feed directions

λ_s=48°
γ_s=10°
Cutting geometry
λ_s = Helix Angle
γ_s = Rake Angle

λ_s var. — Variable helix angle

ZEFP = Number of flutes
● = **Main Application**
○ = Extended application

Toolfinder for High Performance Milling Cutters

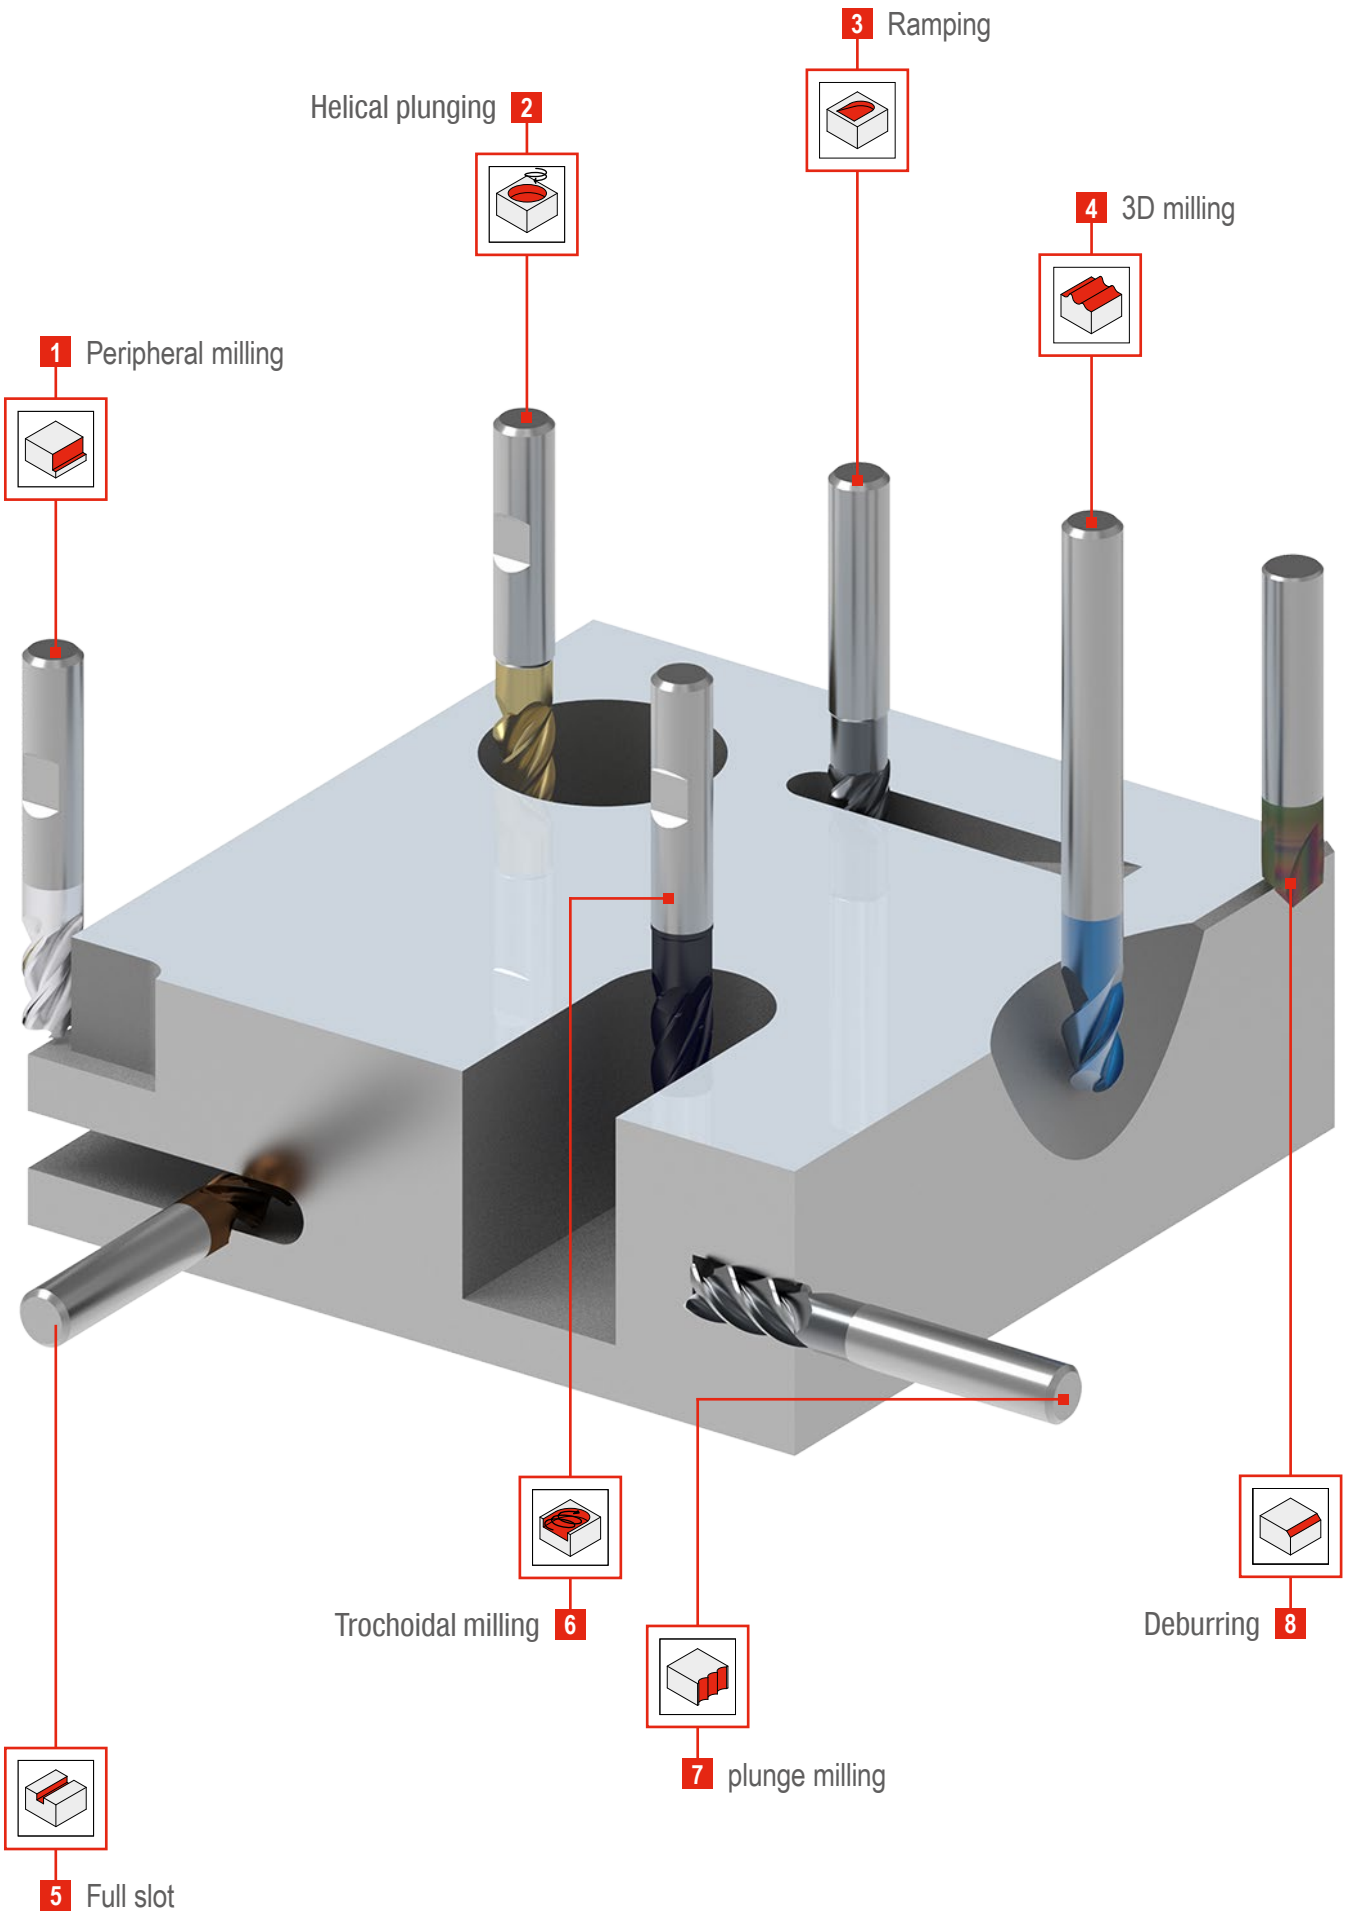

Toolfinder for high-performance milling cutters – MonsterMill

			1 Peripheral milling	2 Helical plunging	3 Ramping	4 3D milling
P	Steel		MonsterMill – SCR MonsterMill – PCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – SCR
K	Stainless steel		MonsterMill – ICR	MonsterMill – ICR	MonsterMill – ICR	MonsterMill – TCR
M	Cast iron		MonsterMill – SCR MonsterMill – PCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – SCR
N	Non-ferrous metals		MonsterMill – PCR	MonsterMill – PCR	MonsterMill – PCR	
S	Heat resistant alloys		MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR	MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR	MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR	MonsterMill – TCR MonsterMill – NCR
H	Tempered steel	< 55 HRC				
		> 55 HRC	MonsterMill – HCR			MonsterMill – HCR
O	Non-metal materials		MonsterMill – FRP			

MonsterMill – SCR

→ Page 19–26

The specialist for machining steel and cast iron

SCR

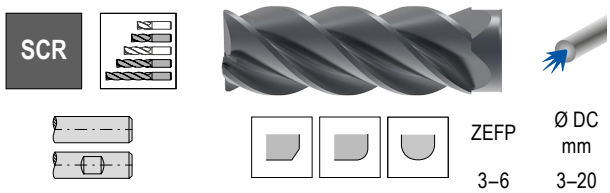

ZEFP	Ø DC mm
3–6	3–20

MonsterMill – ICR

→ Page 27+28

The specialist for machining stainless steel

ICR

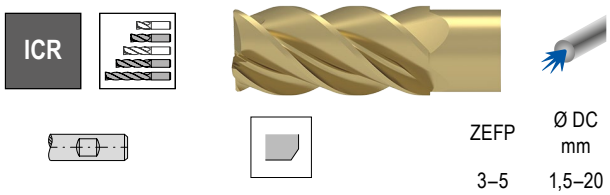

ZEFP	Ø DC mm
3–5	1,5–20

MonsterMill – HCR

→ Page 40–45

The specialist for finish machining tempered steel up to 70 HRC

HCR

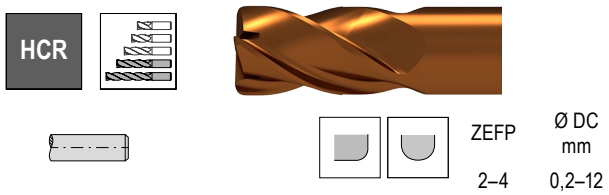

ZEFP	Ø DC mm
2–4	0,2–12

MonsterMill – PCR

→ Page 46–50

The specialist for ramping, plunging and helical milling

PCR

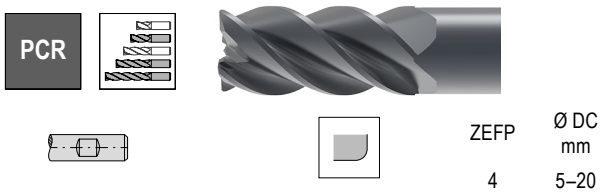

ZEFP	Ø DC mm
4	5–20

	5 Full slot	6 Trochoidal milling	7 plunge milling	8 Deburring
	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR	MonsterMill – PCR	
	MonsterMill – ICR			
	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR	MonsterMill – PCR	
	MonsterMill – PCR	MonsterMill – PCR	MonsterMill – PCR	
	MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR			
	MonsterMill – FRP			

MonsterMill – TCR

→ Page 29–33

The specialist for machining titanium and titanium alloys

TCR



ZEFP	Ø DC mm
2–5	2–20

MonsterMill – NCR

→ Page 34–39

The specialist for machining nickel-based alloys

NCR

ZEFP	Ø DC mm
4–5	2–20

MonsterMill – MCR

→ Page 51

The specialist for rough machining steel and cast iron

MCR



ZEFP	Ø DC mm
3–4	1–20

MonsterMill – FRP / FRP CR

→ Page 52–56

The specialist for machining fibre-reinforced plastics

FRP

ZEFP	Ø DC mm
1–8	6–12,7

14

Toolfinder for high-performance milling cutters

			1 Peripheral milling	2 Helical plunging	3 Ramping	4 3D milling
P	Steel		SilverLine S-Cut Micro-milling tools MultiLock / MultiChange	MultiLock / MultiChange		3D Finish SilverLine Micro-milling tools MultiLock / MultiChange
K	Stainless steel		SilverLine S-Cut Micro-milling tools			3D Finish SilverLine Micro-milling tools
M	Cast iron		SilverLine S-Cut Micro-milling tools MultiLock / MultiChange	MultiLock / MultiChange	MultiLock / MultiChange	3D Finish SilverLine Micro-milling tools MultiLock / MultiChange
N	Non-ferrous metals		AluLine PCD milling tools Micro-milling tools MultiChange	AluLine PCD milling tools MultiChange	AluLine PCD milling tools MultiChange	3D Finish AluLine PCD milling tools Micro-milling tools MultiChange
S	Heat resistant alloys		Micro-milling tools MultiLock	MultiLock	MultiLock	3D Finish Micro-milling tools MultiLock
H	Tempered steel	< 55 HRC	BlueLine Micro-milling tools	BlueLine	BlueLine	BlueLine Micro-milling tools
		> 55 HRC				
O	Non-metal materials		PCD milling tools Micro-milling tools	PCD milling tools	PCD milling tools	3D Finish PCD milling tools Micro-milling tools

CircularLine

→ Page 57–76

The specialist for trochoidal machining

CCR

ZEFP: 4–6

Ø DC mm: 6–20

AluLine

→ Page 77–115

The specialist for machining non-ferrous metals

W / WF / WR



ZEFP: 2–6

Ø DC mm: 2–25

S-Cut

→ Page 151–155

The all-rounder with soft cut and low power consumption

SC UNI

ZEFP: 4–5

Ø DC mm: 3–25

3D Finish

→ Page 156–160

The specialist for 3D finish machining

N

ZEFP: 2–4

Ø DC mm: 4–16

MultiLock

→ Page 193–196

The sustainable exchangeable head system

N

ZEFP: 4–6

Ø DC mm: 12–25

MultiChange

→ Page 197–202

The exchangeable head system for the highest demands and a wide range of applications

PCR W N

ZEFP: 3–6

Ø DC mm: 8–20

5 Full slot	6 Trochoidal milling	7 plunge milling	8 Deburring
S-Cut SilverLine Micro-milling tools MultiLock / MultiChange	CircularLine		SilverLine MultiLock MultiChange
S-Cut SilverLine Micro-milling tools	CircularLine		SilverLine
S-Cut SilverLine Micro-milling tools MultiLock / MultiChange	CircularLine		SilverLine MultiLock MultiChange
AluLine PCD milling tools Micro-milling tools MultiChange	CircularLine	PCD milling tools	AluLine MultiChange
Micro-milling tools MultiLock	CircularLine		SilverLine
BlueLine Micro-milling tools	CircularLine		BlueLine
	CircularLine		BlueLine
PCD milling tools Micro-milling tools		PCD milling tools	AluLine

PCD milling tools
→ Page 116–128

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

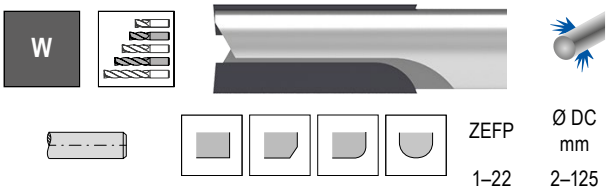

ZEFP	Ø DC mm
1–22	2–125

SilverLine
→ Page 129–150

The all-rounder for universal application

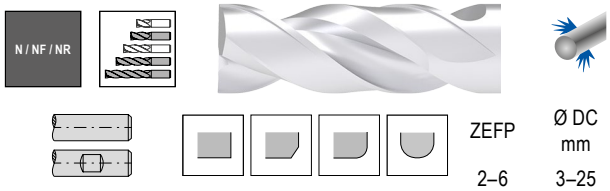

ZEFP	Ø DC mm
2–6	3–25

BlueLine
→ Page 161–185

The all-rounder for machining tempered steel

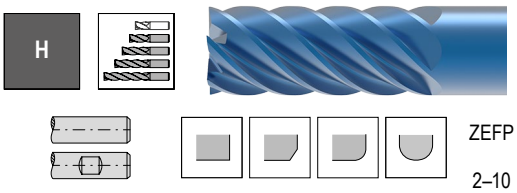

ZEFP	Ø DC mm
2–10	0,1–20

Micro-milling tools
→ Page 186–192

The universal milling cutter for micro-cutting

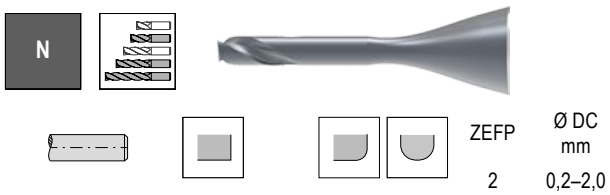

ZEFP	Ø DC mm
2	0,2–2,0

14

Overview High Performance Milling Cutters

Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
MonsterMill																			
SCR	4–6	3–20	●	○	●	○	○	○	○		■	■		■	HPC		■		19–24
SCR	3–4	3–16	●	○	●	○	○	○	○				■	■	HPC		■		25
SCR	4	3–16	●		●				○			■		■	HPC HFC	■	■		26
ICR	3–5	1,5–20	○	●	○	○	●	○	○		■			■	HPC	■	■		27+28
TCR	4–5	4–20	○	○			●					■		■	HPC		■		29–31
TCR	4	2–16	○	○			●						■	■			■		32
TCR	2–5	2–16	○	○			●					■		■	HPC HFC		■		33
NCR	4–5	4–20		○			●					■		■	HPC		■		34–38
NCR	4	2–16		○			●						■	■			■		39
HCR	2–4	0,2–12	○					●				■		■			■		40–42
HCR	2–4	0,2–12	○					●					■	■			■		43–45
PCR UNI	4	5–20	●	○	●							■		■	HPC		■		46–48
PCR ALU	4	5–20				●						■		■	HPC		■		49+50
MCR	3–4	1–20	●	○	●	○	○	○			■			■	HPC		■		51
FRP CR		6,0–12,7							●		■			■			■		52+53
FRP	8	6,0–12,7							●		■			■			■		54–56
CircularLine																			
CCR UNI	5–6	6–20	●	○	●		○				■	■		■	HPC		■		57–66
CCR VA	5–6	6–20	○	●			●					■		■	HPC		■		67+68
CCR AL	4	6–20				●					■	■		■			■		69–74
CCR Ti	5	6–20	○	○			●					■		■	HPC		■		75
CCR H	6	6–20						●				■		■			■		76

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
AluLine																				
	W	2	2–20				●													77–82
	W	3	2–20				●													83–90
	W	3	2–20				●									HPC				91–97
	W	3	6–20				●													98–100
	W	4	2–25				●													101–106
	WF	3	3–20				●													107
	WR	3	6–20				●									HPC				108+109
	W	6	6–20				●									HPC				110
	W	2	3–20				●			○										111–113
	W	4	4–16				●			●										114+115
PCD milling tools																				
	W	1–4	2–20				●			●										116–118
	W	1–2	2–20				●			●										119
	W	1–2	2–20				●			●										120+121
	W	4–10	10–32				●			●						HPC				122
	W	3	16–25				●			●										123
	W	2–3	10–25				●			●										124
	W	2–6	10–32				●			●										125
	W	4–10	10–32				●			●						HPC				126
	W	2–3	10–16				●			●										127
	W	10–22	40–125				●			●										128

14

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
SilverLine																				
	N	2	3–20	●	●	●	○	●			■	■			■	HPC		■		129+130
	N	3	3–20	●	●	●	○	●			■	■	■		■	HPC		■		131–133
	N	4	3–20	●	●	●	○	●				■			■	HPC		■		134–136
	N	4	6–20	●	●	●	○	●				■			■	HPC	■	■		137
	N	4–5	3–20	●	●	●	○	●				■	■		■	HPC		■		138–142
	NF	4	3–20	●	●	●	○	●				■			■	HPC		■		143
	NR	4	3–20	●	●	●	○	●				■			■	HPC		■		144
	N	6	6–25	●	●	○	○	●			■				■			■		145
	N	2	3–20	●		●	○		○					■	■			■		146
	N	4	4–20	●	○	●	○							■	■			■		147
	N	4	6–20	●	○	●	○		○				■		■	HPC HFC		■		148
	N	5	4–16	●	●	●		●										■	■	149+150
S-Cut																				
	SC UNI	4	3–25	●	●	●	○	○	○		■	■	■		■	HPC		■		151–153
	SC UNI	5	6–20	●	●	●		○				■			■	HPC		■		154
	SC NR	4	3–20	●	●	●	○	○	○			■			■	HPC		■		155
3D Finish																				
	N	4	10	●	●	●	●	●	○	●					■			■		156
	N	3–4	6–16	●	●	●	●	●	○	●					■			■		157
	N	3	6–16	●	●	●	●	●	○	●					■			■		158
	N	2	10	●	●	●	●	●	○	●					■			■		159
	N	3	4–12	●	●	●	●	●							■			■		160

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
BlueLine																				
	H	2	0,2–3	●					●		●								☐	161–163
	H	2	0,2–3	●					●					●					☐	164–166
	H	2	0,4–3	●					●				●						☐	167–169
	H	2	0,5–20	●					●			●							☐	170
	H	4–6	1–20	●					●				●						☐	171–173
	H	4–10	2–20	●					●		●		●						☐	174+175
	H	2	0,1–20	○					●					●					☐	176–179
	H	3	3–12	●					●					●					☐	180
	H	4	2–20	○					●					●					☐	181
	H	2	0,5–16	○					●				●						☐	182–184
	H	5–8	4–16	●					●										☐	185
Micro-milling tools																				
	N	2	0,2–2	●	●	●	●	●	○	○	●								☐	186+187
	N	2	0,2–2	●	●	●	●	●	○	○				●					☐	188–190
	N	2	0,5–2	●	●	●	●	●	○	○			●						☐	191+192

14

Overview High Performance Milling Cutters

MultiLock – exchangeable head system

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
	N	4	12–25	●	○	●	○	●						■				■		193
	N	4–6	12–25	●	○	●	○	●					■				■	■		193
	N	5–6	12–25	●	○	●		●					■			HFC	■	■		194
	N	4	12–16	●	○	●	○											■		194

MultiLock – Adapters and holders

																				195+196

MultiChange – exchangeable head system

	PCR	4	10–20	●	○	●	●						■			HPC		■		198
	W	3	10–20				●						■					■		198
	N	3–4	8–20	●		●						■				HPC		■		199
	N	4–6	8–20	●	○	●	●					■						■		199
	N	6	8–20	●	○	●					■							■		200
	N	4	10–20	●	○	●	●			○				■				■		200
	N	4	8–20	●	○	●	●			○			■					■		200
	N	6	8–20	●	○	●							■			HFC	■	■		201
	N	4	8–20	●	○	●	●											■		201
	N	4–6	10–20	●	○	●	●											■		202

End Mills Overview

Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
End Mills with Finishing Geometry																			
W	2	0,2–6,0				●					■			■			■		203+204
W	2	2,7–25				●			●	■	■	■		■	HPC		■	□	205–211
W	3	3–25				●				■		■		■	HPC		■	□	212–214
W	4	6–20				●				■				■	HPC		■	□	215+216
W	5–7	6–20				●				■				■	HPC		■	□	217
N	2	0,2–20	●	○	●	○	○	○	○	■	■			■			■	□	218–225
N	3	3–20	○	●	○	○	●		○	■				■				□	226
N	3	0,5–20	●	●	●	●	●	○	●	■	■			■			■	□	227–231
N	4	1,5–25	●	○	●	○	○	○	○	■	■			■	HPC		■	□	234–238
N	4	2–12	○	●	○	●	●		●			■		■	HPC		■		239
N	4	3–20	●	○	●	○	○	○	○			■		■			■		240
N	4	3–20	●	●	●	○	●			■	■	■		■	HPC		■		241–246
N	6–8	4–32	●	●	●	●	●		●	■	■	■		■			■	□	247–250
N	8–16	6–20	○	●	○	●	●		●	■				■			■		251
H	4	4–20	●					●			■	■		■			■		252+253
H	6–8	4–25	●	●	○	●	●	●	●	■	■			■			■		254+255
End Mills with Roughing and Finishing Geometry																			
WF	4	5–20				●	○		●		■			■			■		256
NTR	3–4	6–20	●	○	●	○					■			■			■		257

14

Overview of end milling, ball-nosed and torus cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
End Mills with Roughing Geometry																				
	WR	3	3–20				●						●		■	HPC		■		258
	NR	4–6	4–25	●	●	●	○	●		○		●			■	HPC	■	■		259–262
	HR	4–5	6–25	●	●	●						●			■		■	■		263–265
Ball Nosed End Mills with Finishing Geometry																				
	W	2	0,5–12				●	○		●				●	■				■	266
	W	2	0,2–6				●							●	■			■		267+268
	W	2	3–20				●							●	■	HPC		■	■	269
	W	2	0,5–12				●			●				●	■			■		270+271
	N	2	0,1–20	●	○	●	○	○	○	○				●	■			■	■	272–277
	N	2	1–12	●	○	●	○	○	○	○				●	■			■		278
	N	2	3–20	●	●	○	●	○						●	■	HPC		■		279
	N	4	3–20	●	●	●	●	●	○	●				●	■	HPC		■	■	280–282
	H	2	0,2–20	●	○	●	○	○	○	○				●	■			■		283–284
Torus Milling Cutters with Finishing Geometry																				
	W	2	0,2–12				●						●		■			■		285–288
	W	2	2–12				●			●			●		■			■		289
	W	4	4–12				●			●			●		■			■		290+291
	N	2	0,5–16	●	○	●	○	○	○	○			●		■			■		292
	H	2	0,4–12	●	○	●	○	○	○	○			●		■			■		293–296
	H	4–8	3–16	●		○			●				●		■			■		297

Overview Special Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
Intermediate Size Torus End Mills																				
	H	4	7–17	○	●	○	●	●		●			■		■			■		298
Form / Chamfering and Die Sinking / Deburring Cutters																				
	W	1	3–6	○	○	○	●	○		●									□	299
	N	4	4–12	●	○	●	○	○	○	●								■	□	300
	N	4	3–12	●	○	●	○	○	○	●								■	□	301
	N	4	6–10	●	○	●	○	○	○	●								■		302
	N	6–10	11–40	●	○	●												■		303
			3–16																□	304+305
Circular saw blades																				
		24–160	15–63	●	●	●	●	●		●								■		306+307
		64–160	80–200	●	●	●	●	●		●								■		
Cylindrical shank adapter for circular saw blades																				
																				308

14

This article can be found in our online shop at cuttingtools.ceratizit.com

Overview Special Milling Cutters

Plastics-GFK-CFK- Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
	W		2–20							●									□	310
	W		2–20							●									□	311
	W		2–20							●								■		312
	W		5–16							●	■							■		313
	W		6–24							●	■							■		314
	W	2	2–12				●			●								■		315
	W	1	1,5–16,0				●			●									□	316
	W	1	1,5–12,0				●			●								■		317
	W	2	2–12				●			●								■		318
	W	3	3–12				●			●				■				■		319
	N	2	2–12	●	○	●	○	○		●									□	320

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



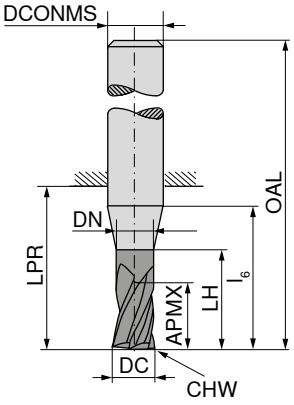

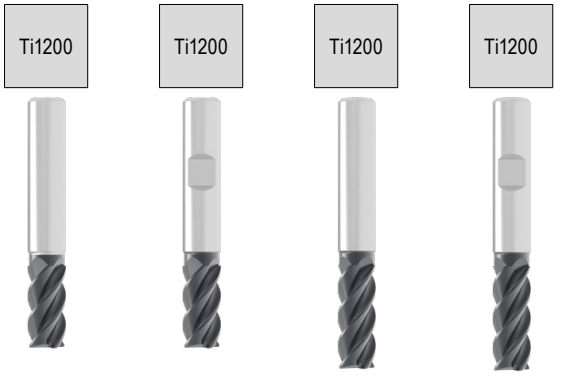

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

DC $_{f8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	CHW mm	ZEFP	52 600 ...		52 601 ...		52 602 ...		52 603 ...	
3,0	5	2,9	9	14	14	50	6	0,07	4		030		030				
3,0	8	2,9	14	20	22	58	6	0,07	4						030		030
3,5	5	3,4	9	14	14	50	6	0,07	4		035		035				
3,5	8	3,4	14	20	22	58	6	0,07	4						035		035
4,0	8	3,8	12	18	18	54	6	0,07	4		040		040				
4,0	11	3,8	18	20	22	58	6	0,07	4						040		040
4,5	9	4,3	12	18	18	54	6	0,07	4		045		045				
4,5	13	4,3	18	20	22	58	6	0,07	4						045		045
5,0	9	4,8	16	18	18	54	6	0,07	4		050		050				
5,0	13	4,8	19	20	22	58	6	0,07	4						050		050
5,5	9	5,3	16	18	18	54	6	0,07	4		055		055				
5,5	13	5,3	19	20	22	58	6	0,07	4						055		055
6,0	10	5,8		16	18	54	6	0,07	4		060		060				
6,0	13	5,8		20	22	58	6	0,07	4						060		060
6,5	12	6,3	18	20	23	59	8	0,07	4		065		065				
6,5	19	6,3	23	25	28	64	8	0,07	4						065		065
7,0	12	6,8	18	20	23	59	8	0,07	4		070		070				
7,0	19	6,8	23	25	28	64	8	0,07	4						070		070
7,5	12	7,3	18	20	23	59	8	0,12	4		075		075				
7,5	19	7,3	23	25	28	64	8	0,12	4						075		075
8,0	12	7,7		20	23	59	8	0,12	4		080		080				
8,0	19	7,7		25	28	64	8	0,12	4						080		080
8,5	15	8,2	22	24	27	67	10	0,20	4		085		085				
8,5	22	8,2	28	30	33	73	10	0,20	4						085		085
9,0	15	8,7	22	24	27	67	10	0,20	4		090		090				
9,0	22	8,7	28	30	33	73	10	0,20	4						090		090
9,5	15	9,2	22	24	27	67	10	0,20	4		095		095				
9,5	22	9,2	28	30	33	73	10	0,20	4						095		095
10,0	15	9,5		24	27	67	10	0,20	4		100		100				
10,0	22	9,5		30	33	73	10	0,20	4						100		100
11,0	18	10,5	24	26	28	73	12	0,20	4		110		110				
11,0	26	10,5	32	35	39	84	12	0,20	4						110		110
11,5	18	11,0	24	26	28	73	12	0,20	4		115		115				
11,5	26	11,0	32	35	39	84	12	0,20	4						115		115
12,0	18	11,5		26	28	73	12	0,20	4		120		120				
12,0	26	11,5		35	39	84	12	0,20	4						120		120
14,0	21	13,5		28	30	75	14	0,20	4		140		140				
14,0	26	13,5		35	39	84	14	0,20	4						140		140
15,0	24	14,5	30	32	35	83	16	0,20	4		150		150				
15,0	32	14,5	38	40	45	93	16	0,20	4						150		150
P											●		●		●		●
M											○		○		○		○
K											●		●		●		●
N											○		○		○		○
S											○		○		○		○
H											○		○		○		○
O											○		○		○		○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 322+323

14

Continued on next page

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



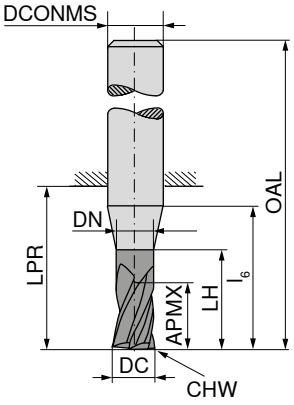

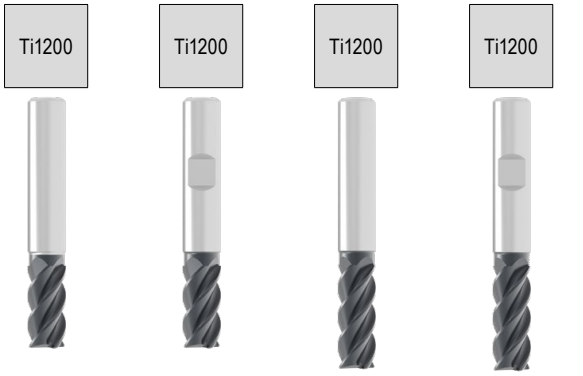

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	52 600 ...	52 601 ...	52 602 ...	52 603 ...
16,0	24	15,5		32	35	83	16	0,20	4	**160**	**160**		
16,0	24	15,5		32	35	83	16	0,20	5	**161** 1)	**161** 1)		
16,0	32	15,5		40	45	93	16	0,20	5			**161** 1)	**161** 1)
16,0	32	15,5		40	45	93	16	0,20	4			**160**	**160**
17,0	32	16,5	48	50	52	100	18	0,20	4				**170**
18,0	27	17,5		34	37	85	18	0,20	5	**181** 1)	**181** 1)		
18,0	27	17,5		34	37	85	18	0,20	4	**180**	**180**		
18,0	32	17,5		50	52	100	18	0,20	5			**181** 1)	**181** 1)
18,0	32	17,5		50	52	100	18	0,20	4			**180**	**180**
19,0	38	18,5	48	50	54	104	20	0,30	4				**190**
19,5	38	19,0	48	50	54	104	20	0,30	4				**195**
20,0	30	19,5		40	43	93	20	0,30	5	**201** 1)	**201** 1)		
20,0	30	19,5		40	43	93	20	0,30	4	**200**	**200**		
20,0	38	19,5		50	54	104	20	0,30	4			**200**	**200**
20,0	38	19,5		50	54	104	20	0,30	5			**201** 1)	**201** 1)
P										●	●	●	●
M										○	○	○	○
K										●	●	●	●
N										○	○	○	○
S										○	○	○	○
H										○	○	○	○
O										○	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 322+323

MonsterMill – End milling cutter

The specialist for machining steel and cast iron





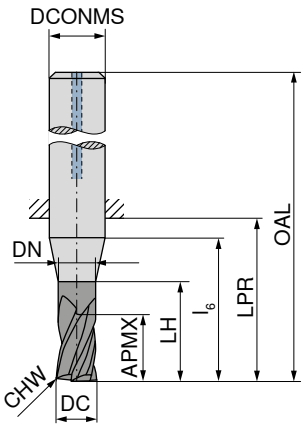

Ti1200

DIN 6527

52 606 ...

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	
3	8	2,9	14	20	22	58	6	0,07	4	**030**
4	11	3,8	18	20	22	58	6	0,07	4	**040**
5	13	4,8	19	20	22	58	6	0,07	4	**050**
6	13	5,8		20	22	58	6	0,07	4	**060**
8	19	7,7		25	28	64	8	0,12	4	**080**
10	22	9,5		30	33	73	10	0,20	4	**100**
12	26	11,5		35	39	84	12	0,20	4	**120**
16	32	15,5		40	45	93	16	0,20	4	**160**
20	38	19,5		50	54	104	20	0,30	4	**200**

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 322+323

14

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



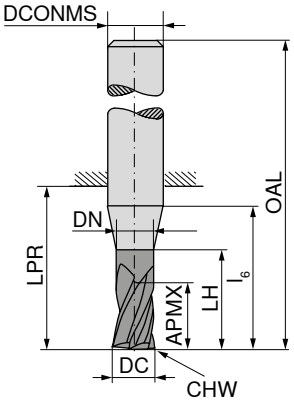

Factory standard

Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	52 604 ...	52 605 ...
3	5	2,9	14	20	22	58	6	0,07	4	**030**	
3	5	2,9	19	23	26	62	6	0,07	4		**030**
4	8	3,8	18	20	22	58	6	0,07	4	**040**	
4	8	3,8	23	25	26	62	6	0,07	4		**040**
5	9	4,8	19	20	22	58	6	0,07	4	**050**	
5	9	4,8	24	25	26	62	6	0,07	4		**050**
6	10	5,8		20	22	58	6	0,07	4	**060**	
6	10	5,8		25	26	62	6	0,07	4		**060**
8	12	7,7		25	28	64	8	0,12	4	**080**	
8	12	7,7		30	32	68	8	0,12	4		**080**
10	15	9,5		30	33	73	10	0,20	4	**100**	
10	15	9,5		35	40	80	10	0,20	4		**100**
12	18	11,5		35	39	84	12	0,20	4	**120**	
12	18	11,5		45	48	93	12	0,20	4		**120**
14	21	13,5		35	39	84	14	0,20	4	**140**	
14	21	13,5		50	54	99	14	0,20	4		**140**
16	24	15,5		40	45	93	16	0,20	4	**160**	
16	24	15,5		40	45	93	16	0,20	5	**161** [1]	
16	24	15,5		55	60	108	16	0,20	4		**160**
16	24	15,5		55	60	108	16	0,20	5		**161** [1]
18	27	17,5		50	52	100	18	0,20	4	**180**	
18	27	17,5		50	52	100	18	0,20	5	**181** [1]	
18	27	17,5		60	66	114	18	0,20	4		**180**
18	27	17,5		60	66	114	18	0,20	5		**181** [1]
20	30	19,5		50	54	104	20	0,30	4	**200**	
20	30	19,5		50	54	104	20	0,30	5	**201** [1]	
20	30	19,5		70	76	126	20	0,30	4		**200**
20	30	19,5		70	76	126	20	0,30	5		**201** [1]
P										●	●
M										○	○
K										●	●
N										○	○
S										○	○
H										○	○
O										○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 322–325

MonsterMill – End milling cutter with corner radius

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° | γ_s = 7° | HPC



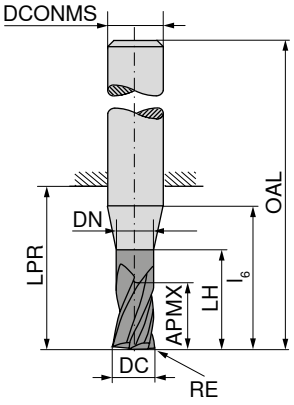

Ti1200

Factory standard

52 607 ...

DC $_{f8}$ mm	RE $_{\pm 0,01}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	
3	0,10	8	2,9	14	20	22	58	6	4	**030**
3	0,30	8	2,9	14	20	22	58	6	4	**031**
3	0,50	8	2,9	14	20	22	58	6	4	**032**
4	0,10	11	3,8	18	20	22	58	6	4	**040**
4	0,40	11	3,8	18	20	22	58	6	4	**041**
4	0,50	11	3,8	18	20	22	58	6	4	**042**
5	0,10	13	4,8	19	20	22	58	6	4	**050**
5	0,50	13	4,8	19	20	22	58	6	4	**051**
5	1,00	13	4,8	19	20	22	58	6	4	**052**
6	0,10	13	5,8		20	22	58	6	4	**060**
6	0,50	13	5,8		20	22	58	6	4	**061**
6	1,00	13	5,8		20	22	58	6	4	**062**
8	0,15	19	7,7		25	28	64	8	4	**080**
8	0,50	19	7,7		25	28	64	8	4	**081**
8	1,00	19	7,7		25	28	64	8	4	**082**
8	2,00	19	7,7		25	28	64	8	4	**083**
10	0,15	22	9,5		30	33	73	10	4	**100**
10	0,50	22	9,5		30	33	73	10	4	**101**
10	1,00	22	9,5		30	33	73	10	4	**102**
10	1,50	22	9,5		30	33	73	10	4	**103**
10	2,00	22	9,5		30	33	73	10	4	**104**
12	0,20	26	11,5		35	39	84	12	4	**120**
12	0,50	26	11,5		35	39	84	12	4	**121**
12	1,00	26	11,5		35	39	84	12	4	**122**
12	1,50	26	11,5		35	39	84	12	4	**123**
12	2,00	26	11,5		35	39	84	12	4	**124**
14	1,00	26	13,5		35	39	84	14	4	**140**
16	0,30	32	15,5		40	45	93	16	4	**160**
16	0,50	32	15,5		40	45	93	16	4	**161**
16	1,00	32	15,5		40	45	93	16	4	**162**
16	2,00	32	15,5		40	45	93	16	4	**163**
16	4,00	32	15,5		40	45	93	16	4	**164**
20	0,30	38	19,5		50	54	104	20	4	**200**
20	0,50	38	19,5		50	54	104	20	4	**201**
20	1,00	38	19,5		50	54	104	20	4	**202**
20	2,00	38	19,5		50	54	104	20	4	**203**

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 322+323

14

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



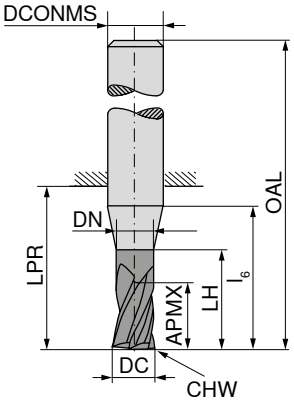

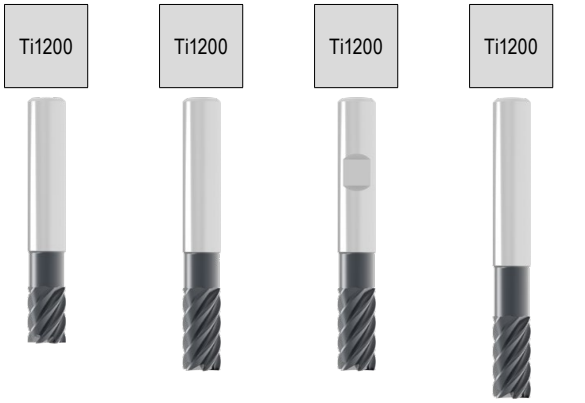

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	DIN 6527	DIN 6527	DIN 6527	Factory standard
										52 608 ...	52 608 ...	52 608 ...	52 608 ...
5	9	4,8	16	18	18	54	6	0,12	6	050			
5	13	4,8	19	20	22	58	6	0,12	6		051		
5	13	4,8	24	25	26	62	6	0,12	6				052
6	10	5,8		16	18	54	6	0,12	6	060			
6	13	5,8		20	22	58	6	0,12	6		061		
6	13	5,8		25	26	62	6	0,12	6				062
8	12	7,7		20	23	59	8	0,12	6	080			
8	19	7,7		25	28	64	8	0,12	6		081		
8	19	7,7		30	32	68	8	0,12	6				082
10	15	9,5		24	27	67	10	0,20	6	100			
10	22	9,5		30	33	73	10	0,20	6		101	103	
10	22	9,5		35	40	80	10	0,20	6				102
12	18	11,5		26	28	73	12	0,20	6	120			
12	26	11,5		35	39	84	12	0,20	6		121	123	
12	26	11,5		45	48	93	12	0,20	6				122
16	24	15,5		32	35	83	16	0,20	6	160			
16	32	15,5		40	45	93	16	0,20	6		161	163	
16	32	15,5		55	60	108	16	0,20	6				162
20	30	19,5		40	43	93	20	0,30	6	200			
20	38	19,5		50	54	104	20	0,30	6		201	203	
20	38	19,5		70	76	126	20	0,30	6				202
P										●	●	●	●
M										○	○	○	○
K										●	●	●	●
N										○	○	○	○
S										○	○	○	○
H										○	○	○	○
O										○	○	○	○

→ v_c/f_z Page 322–325

MonsterMill – Ball Nosed Cutter

The specialist for machining steel and cast iron

▲ Radius accuracy: - 0,015 mm for Ø ≤ 6,0 mm / - 0,02 mm for Ø > 6,0 mm

SCR | λ_s = 35° γ_s = 38° γ_s = 7° | HPC



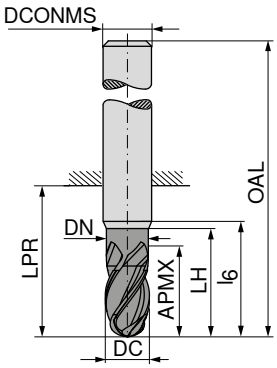

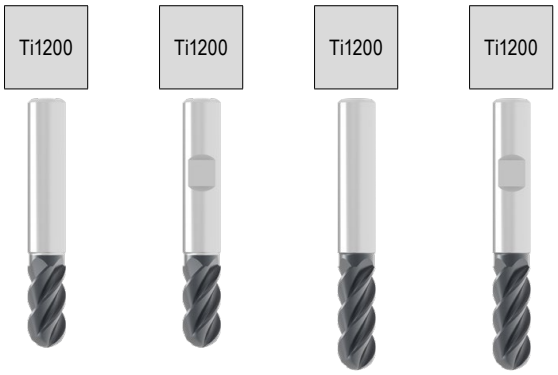

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

									52 611 ...		52 611 ...		52 612 ...		52 612 ...	
DC $_{f8}$ **mm**	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP								
3	5	2,9	9	14	14	50	6	3		**030**						
3	8	2,9	14	20	22	58	6	3						**030**		
4	8	3,8	12	18	18	54	6	3		**040**						
4	11	3,8	18	20	22	58	6	3						**040**		
5	9	4,8	16	18	18	54	6	3		**050**						
5	13	4,8	19	20	22	58	6	3						**050**		
6	10	5,8		16	18	54	6	4		**060**		**061**				
6	13	5,8		20	22	58	6	4						**060**		**061**
8	12	7,7		20	23	59	8	4		**080**		**081**				
8	19	7,7		25	28	64	8	4						**080**		**081**
10	15	9,5		24	27	67	10	4		**100**		**101**				
10	22	9,5		30	33	73	10	4						**100**		**101**
12	18	11,5		26	28	73	12	4		**120**		**121**				
12	26	11,5		35	39	84	12	4						**120**		**121**
16	24	15,5		32	35	83	16	4		**160**		**161**				
16	32	15,5		40	45	93	16	4						**160**		**161**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 322+323

14

MonsterMill – Torus Face Milling Cutter

The specialist for machining steel and cast iron

▲ r_{3D} = programmed corner radius

▲ For HFC machining: APMX does not correspond to the maximum cutting depth

SCR | λ_s=45° γ_s= 7° | HFC | HPC | ≤ 60 HRC



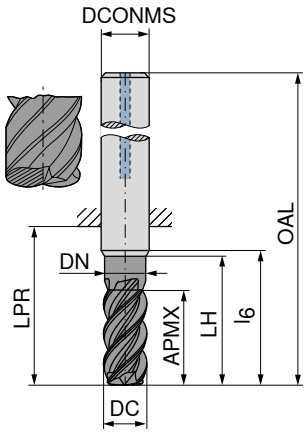

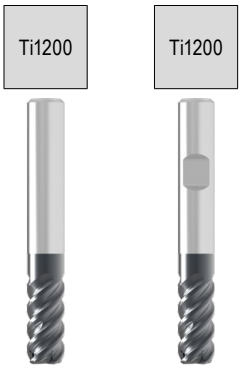

DIN 6527 | DIN 6527

DC -0.04 mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	l_6 mm	DCONMS h5 mm	T max. mm	ZEFP	52 609 ...		52 609 ...	
3	0,4	3	2,9	14,00	21	57	20	6	0,10	4	**030**		**031**	
4	0,5	4	3,8	18,00	21	57	20	6	0,15	4	**040**		**041**	
5	0,6	5	4,8	18,00	21	57	20	6	0,20	4	**050**		**051**	
6	0,8	13	5,8	19,90	21	57	20	6	0,20	4	**060**		**061**	
8	1,0	19	7,7	24,85	27	63	25	8	0,30	4	**080**		**081**	
10	1,2	22	9,5	29,75	32	72	30	10	0,40	4	**100**		**101**	
12	1,6	26	11,5	34,75	38	83	35	12	0,40	4	**120**		**121**	
16	2,2	32	15,5	39,75	44	92	40	16	0,50	4	**160**		**161**	
P											●		●	
M														
K											●		●	
N														
S														
H											○		○	
O														

→ v_c/f_z Page 326–328

MonsterMill – End milling cutter

The specialist for machining stainless steel

ICR | λ_s=40° 38° γ_s=10° | HPC



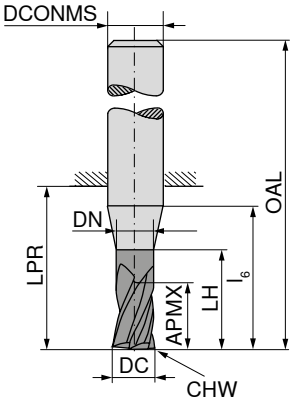

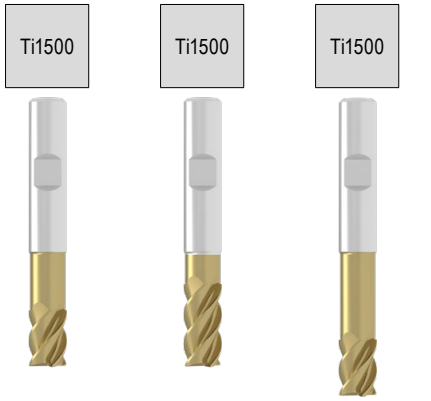

											DIN 6527	Factory standard	Factory standard
											52 784 ...	52 784 ...	52 784 ...
DC $_{e8}$	APMX	DN	LH	l_6	LPR	OAL	DCONMS $_{h6}$	CHW	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm	mm					
1,5	2,3	1,4	6	14	21	57	6	0,04	3		017		
2,0	3,0	1,9	8	15	21	57	6	0,04	3		022		
2,5	3,8	2,4	10	16	21	57	6	0,07	3		027		
3,0	5,0	2,9	14	18	21	57	6	0,07	3		032		
3,0	8,0	2,9	14	18	21	57	6	0,07	3			034	
3,0	5,0	2,9	19	23	26	62	6	0,07	3				036
4,0	8,0	3,8	18	20	21	57	6	0,07	3		042		
4,0	11,0	3,8	18	20	21	57	6	0,07	3			044	
4,0	8,0	3,8	23	25	26	62	6	0,07	3				046
5,0	9,0	4,8	19	20	21	57	6	0,12	3		052		
5,0	13,0	4,8	19	20	21	57	6	0,12	3			054	
5,0	9,0	4,8	24	25	26	62	6	0,12	3				056
6,0	10,0	5,8	20		21	57	6	0,12	4		062		
6,0	13,0	5,8	20		21	57	6	0,12	4			064	
6,0	10,0	5,8	25		26	62	6	0,12	4				066
8,0	12,0	7,7	25		27	63	8	0,12	4		082		
8,0	19,0	7,7	25		27	63	8	0,12	4			084	
8,0	12,0	7,7	30		32	68	8	0,12	4				086
10,0	15,0	9,5	30		32	72	10	0,20	4		102		
10,0	22,0	9,5	30		32	72	10	0,20	4			104	
10,0	15,0	9,5	35		40	80	10	0,20	4				106
12,0	18,0	11,5	35		38	83	12	0,20	4		122		
12,0	26,0	11,5	35		38	83	12	0,20	4			124	
12,0	18,0	11,5	45		48	93	12	0,20	4				126
14,0	21,0	13,5	35		38	83	14	0,20	4		142		
14,0	26,0	13,5	35		38	83	14	0,20	4			144	
14,0	21,0	13,5	50		54	99	14	0,20	4				146
16,0	24,0	15,5	40		44	92	16	0,20	4		161		
16,0	24,0	15,5	40		44	92	16	0,20	5		162 [1]		
16,0	32,0	15,5	40		44	92	16	0,20	4			163	
16,0	32,0	15,5	40		44	92	16	0,20	5			164 [1]	
16,0	24,0	15,5	55		60	108	16	0,20	4				165
16,0	24,0	15,5	55		60	108	16	0,20	5				166 [1]
18,0	27,0	17,5	40		44	92	18	0,20	4		181		
18,0	27,0	17,5	40		44	92	18	0,20	5		182 [1]		
18,0	32,0	17,5	40		44	92	18	0,20	4			183	
18,0	32,0	17,5	40		44	92	18	0,20	5			184 [1]	
18,0	27,0	17,5	60		66	114	18	0,20	4				185
18,0	27,0	17,5	60		66	114	18	0,20	5				186 [1]
20,0	30,0	19,5	50		54	104	20	0,30	4		201		
20,0	30,0	19,5	50		54	104	20	0,30	5		202 [1]		
20,0	38,0	19,5	50		54	104	20	0,30	4			203	
20,0	38,0	19,5	50		54	104	20	0,30	5			204 [1]	
20,0	30,0	19,5	70		76	126	20	0,30	4				205
20,0	30,0	19,5	70		76	126	20	0,30	5				206 [1]
P											○	○	○
M											●	●	●
K											○	○	○
N											○	○	○
S											●	●	●
H											○	○	○
O											○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 330–335

14

MonsterMill – End milling cutter

The specialist for machining stainless steel

ICR | λ_s=40° γ_s=38° γ_s=10° | HPC



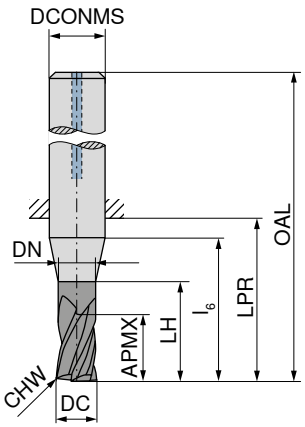

Ti1500

DIN 6527

52 786 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	
3	8	2,9	14	18	21	57	6	0,07	3	**034**
4	11	3,8	18	20	21	57	6	0,07	3	**044**
5	13	4,8	19	20	21	57	6	0,12	3	**054**
6	13	5,8	20		21	57	6	0,12	4	**064**
8	19	7,7	25		27	63	8	0,12	4	**084**
10	22	9,5	30		32	72	10	0,20	4	**104**
12	26	11,5	35		38	83	12	0,20	4	**124**
14	26	13,5	35		38	83	14	0,20	4	**144**
16	32	15,5	40		44	92	16	0,20	4	**163**
16	32	15,5	40		44	92	16	0,20	5	**164** 1)
18	32	17,5	40		44	92	18	0,20	4	**183**
18	32	17,5	40		44	92	18	0,20	5	**184** 1)
20	38	19,5	50		54	104	20	0,30	4	**203**
20	38	19,5	50		54	104	20	0,30	5	**204** 1)

P	○
M	●
K	○
N	○
S	●
H	○
O	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 331–333

MonsterMill – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

▲ PRFRAD3 = 1 mm

TCR | λ_s=40° γ_s=10° | HPC



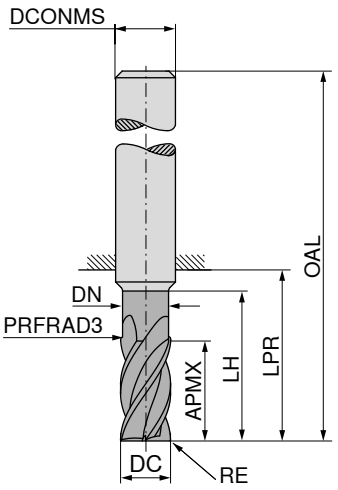

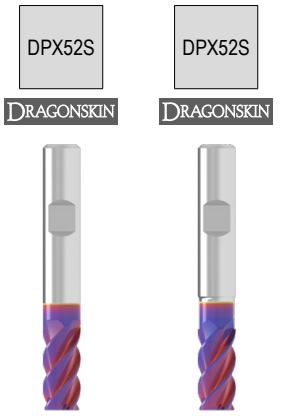

Factory standard

Factory standard

DC e8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 504 ...	52 506 ...
4	0,1	11		14	21	57	6	4	**04000**	
4	0,1	11	3,8	17	21	57	6	5		**04000**[1)]
5	0,1	13		16	21	57	6	4	**05000**	
5	0,1	13	4,8	19	21	57	6	5		**05000**[1)]
6	0,1	13			21	57	6	4	**06000**	
6	0,1	13	5,8	19	21	57	6	5		**06000**[1)]
8	0,2	21			27	63	8	4	**08000**	
8	0,2	21	7,7	25	27	63	8	5		**08000**[1)]
10	0,2	22			32	72	10	4	**10000**	
10	0,2	22	9,7	30	32	72	10	5		**10000**[1)]
12	0,2	26			38	83	12	4	**12000**	
12	0,2	26	11,6	36	38	83	12	5		**12000**[1)]
16	0,3	36			44	92	16	4	**16000**	
16	0,3	36	15,5	42	44	92	16	5		**16000**[1)]
20	0,3	41			54	104	20	4	**20000**	
20	0,3	41	19,5	52	54	104	20	5		**20000**[1)]

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 336+337

14

MonsterMill – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

▲ PRFRAD3 = 1 mm





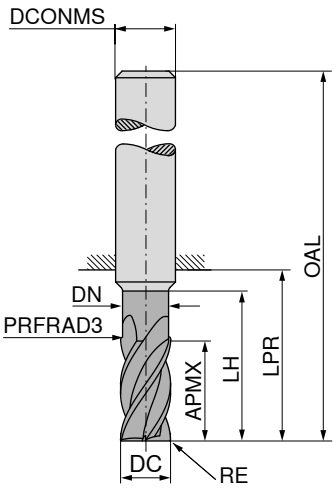

Factory standard | Factory standard

DC e8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 508 ...	52 508 ...
4	0,4	8,5	3,8	20	26	62	6	4		**04104**
4	0,5	8,5	3,8	20	26	62	6	4		**04105**
4	0,8	8,5	3,8	20	26	62	6	4		**04108**
4	0,2	11,0		14	21	57	6	4	**04002**	
4	0,4	11,0		14	21	57	6	4	**04004**	
4	0,5	11,0		14	21	57	6	4	**04005**	
5	0,5	10,5	4,8	25	34	70	6	4		**05105**
5	0,8	10,5	4,8	25	34	70	6	4		**05108**
5	0,5	13,0		16	21	57	6	4	**05005**	
5	1,0	13,0		16	21	57	6	4	**05010**	
6	0,4	13,0			21	57	6	4	**06004**	
6	0,5	13,0			21	57	6	4	**06005**	
6	0,6	13,0			21	57	6	4	**06006**	
6	0,6	13,0	5,8	30	34	70	6	4		**06106**
6	0,8	13,0			21	57	6	4	**06008**	
6	0,8	13,0	5,8	30	34	70	6	4		**06108**
6	1,0	13,0			21	57	6	4	**06010**	
6	1,0	13,0	5,8	30	34	70	6	4		**06110**
6	1,5	13,0			21	57	6	4	**06015**	
8	0,8	17,0	7,7	40	44	80	8	4		**08108**
8	1,0	17,0	7,7	40	44	80	8	4		**08110**
8	1,5	17,0	7,7	40	44	80	8	4		**08115**
8	2,0	17,0	7,7	40	44	80	8	4		**08120**
8	0,5	21,0			27	63	8	4	**08005**	
8	0,8	21,0			27	63	8	4	**08008**	
8	1,0	21,0			27	63	8	4	**08010**	
8	1,2	21,0			27	63	8	4	**08012**	
8	1,5	21,0			27	63	8	4	**08015**	
8	2,0	21,0			27	63	8	4	**08020**	
10	0,5	21,0	9,7	50	54	94	10	4		**10105**
10	1,0	21,0	9,7	50	54	94	10	4		**10110**
10	1,5	21,0	9,7	50	54	94	10	4		**10115**
10	2,0	21,0	9,7	50	54	94	10	4		**10120**
10	0,5	22,0			32	72	10	4	**10005**	
10	1,0	22,0			32	72	10	4	**10010**	
10	1,2	22,0			32	72	10	4	**10012**	
10	1,5	22,0			32	72	10	4	**10015**	
10	1,6	22,0			32	72	10	4	**10016**	
10	2,0	22,0			32	72	10	4	**10020**	
12	0,5	25,0	11,6	60	65	110	12	4		**12105**
12	1,0	25,0	11,6	60	65	110	12	4		**12110**

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 336+337

Continued on next page

MonsterMill – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

▲ PRFRAD3 = 1 mm

TCR | λ_s=40° γ_s=10° | HPC



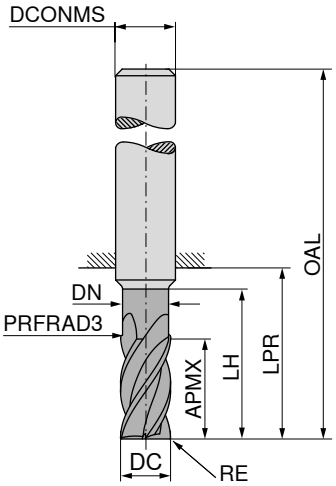

Factory standard | Factory standard

DC e8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 508 ...	52 508 ...
12	1,5	25,0	11,6	60	65	110	12	4		12115
12	2,0	25,0	11,6	60	65	110	12	4		12120
12	3,0	25,0	11,6	60	65	110	12	4		12130
12	4,0	25,0	11,6	60	65	110	12	4		12140
12	0,5	26,0			38	83	12	4	12005	
12	1,0	26,0			38	83	12	4	12010	
12	1,2	26,0			38	83	12	4	12012	
12	1,5	26,0			38	83	12	4	12015	
12	1,6	26,0			38	83	12	4	12016	
12	2,0	26,0			38	83	12	4	12020	
12	2,5	26,0			38	83	12	4	12025	
12	3,0	26,0			38	83	12	4	12030	
14	1,0	29,0	13,6	70	75	120	14	4		14110
14	2,0	29,0	13,6	70	75	120	14	4		14120
14	3,0	29,0	13,6	70	75	120	14	4		14130
14	4,0	29,0	13,6	70	75	120	14	4		14140
16	1,0	33,0	15,5	80	84	132	16	4		16110
16	2,0	33,0	15,5	80	84	132	16	4		16120
16	3,0	33,0	15,5	80	84	132	16	4		16130
16	4,0	33,0	15,5	80	84	132	16	4		16140
16	1,0	36,0			44	92	16	4	16010	
16	1,6	36,0			44	92	16	4	16016	
16	2,0	36,0			44	92	16	4	16020	
16	2,5	36,0			44	92	16	4	16025	
16	3,0	36,0			44	92	16	4	16030	
16	3,2	36,0			44	92	16	4	16032	
16	4,0	36,0			44	92	16	4	16040	
18	1,0	38,0	17,5	90	94	142	18	4		18110
18	2,0	38,0	17,5	90	94	142	18	4		18120
18	3,0	38,0	17,5	90	94	142	18	4		18130
18	4,0	38,0	17,5	90	94	142	18	4		18140
20	2,0	41,0			54	104	20	4	20020	
20	3,0	41,0			54	104	20	4	20030	
20	4,0	41,0			54	104	20	4	20040	
20	5,0	41,0			54	104	20	4	20050	
20	6,3	41,0			54	104	20	4	20063	
20	1,0	42,0	19,5	100	104	154	20	4		20110
20	2,0	42,0	19,5	100	104	154	20	4		20120
20	3,0	42,0	19,5	100	104	154	20	4		20130
20	4,0	42,0	19,5	100	104	154	20	4		20140

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 336+337

14

MonsterMill – Ball Nosed Cutter

The specialist for machining titanium and titanium alloys

TCR | λ_s=40° γ_s=10°

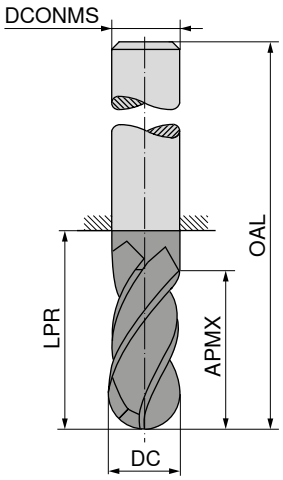

DPX52S DRAGONSKIN

DPX52S DRAGONSKIN

Factory standard

Factory standard

DC $_{e8}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	52 514 ...	52 514 ...
2	4	18	54	6	4	**02000**	
2	4	44	80	6	4		**02100**
3	5	18	54	6	4	**03000**	
3	5	44	80	6	4		**03100**
4	8	18	54	6	4	**04000**	
4	8	44	80	6	4		**04100**
5	9	18	54	6	4	**05000**	
5	9	44	80	6	4		**05100**
6	10	18	54	6	4	**06000**	
6	10	44	80	6	4		**06100**
8	12	22	58	8	4	**08000**	
8	12	64	100	8	4		**08100**
10	14	26	66	10	4	**10000**	
10	14	60	100	10	4		**10100**
12	16	28	73	12	4	**12000**	
12	16	55	100	12	4		**12100**
16	20	34	82	16	4	**16000**	
16	20	52	100	16	4		**16100**
P						○	○
M						○	○
K							
N							
S						●	●
H							
O							

→ v_c/f_z Page 338+339

MonsterMill – Torus Face Milling Cutter

The specialist for machining titanium and titanium alloys

▲ r_{3D} = programmed corner radius
▲ APMX does not correspond to the maximum cutting depth

TCR | λ_s=15° γ_s=10° | HFC | HPC

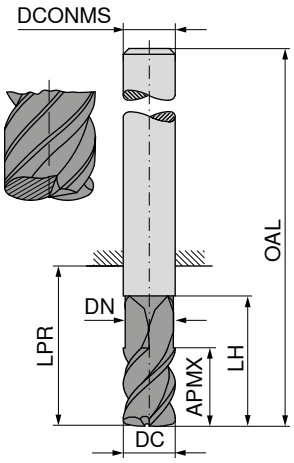

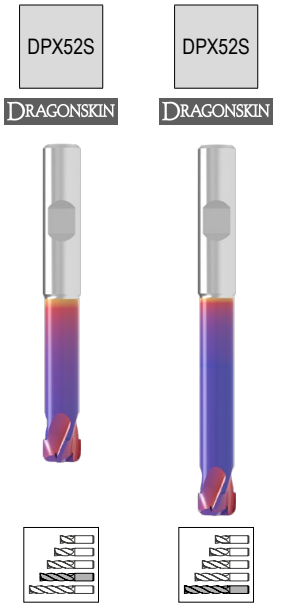

DIN 6527 | DIN 6527

DC e8 mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 512 ...	52 512 ...
2	0,3	1,5	1,7	13	18	54	6	2	02000	
2	0,3	1,5	1,7	18	39	75	6	2		02100
3	0,3	1,5	2,7	15	18	54	6	2	03000	
3	0,3	1,5	2,7	20	39	75	6	2		03100
4	0,5	2,5	3,6	16	22	58	6	2	04000	
4	0,5	2,5	3,6	24	49	85	6	2		04100
5	0,5	3,5	4,6	18	29	65	6	4	05000	
5	0,5	3,5	4,6	28	64	100	6	4		05100
6	1,0	3,5	5,2	20	29	65	6	4	06000	
6	1,0	3,5	5,2	28	64	100	6	4		06100
8	1,5	4,8	7,0	24	34	70	8	5	08000	
8	1,5	4,8	7,0	40	64	100	8	5		08100
10	2,0	5,8	9,0	26	45	85	10	5	10000	
10	2,0	5,8	9,0	48	60	100	10	5		10100
12	2,0	6,8	11,0	30	48	93	12	5	12000	
12	2,0	6,8	11,0	56	75	120	12	5		12100
16	2,5	8,8	14,5	35	52	100	16	5	16000	
16	2,5	8,8	14,5	65	102	150	16	5		16100
P									○	○
M									○	○
K										
N										
S									●	●
H										
O										

→ v_c/f_z Page 338

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm





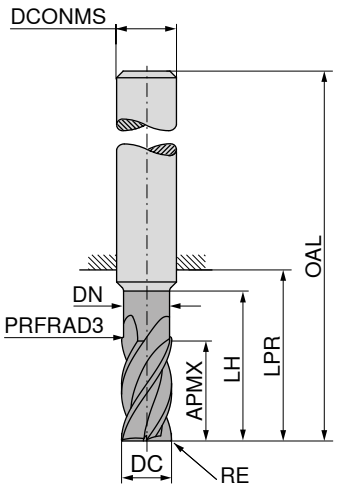



DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	
4	0,1	11	3,8	17	21	57	6	4	**04201**
4	0,2	11	3,8	17	21	57	6	4	**04202**
4	0,4	11	3,8	17	21	57	6	4	**04204**
4	0,5	11	3,8	17	21	57	6	4	**04205**
5	0,1	13	4,8	19	21	57	6	4	**05201**
5	0,5	13	4,8	19	21	57	6	4	**05205**
5	1,0	13	4,8	19	21	57	6	4	**05210**
6	0,1	13	5,8	19	21	57	6	4	**06201**
6	0,4	13	5,8	19	21	57	6	4	**06204**
6	0,5	13	5,8	19	21	57	6	4	**06205**
6	0,6	13	5,8	19	21	57	6	4	**06206**
6	0,8	13	5,8	19	21	57	6	4	**06208**
6	1,0	13	5,8	19	21	57	6	4	**06210**
6	1,5	13	5,8	19	21	57	6	4	**06215**
8	0,2	19	7,7	25	27	63	8	4	**08202**
8	0,5	21	7,7	25	27	63	8	4	**08205**
8	0,8	21	7,7	25	27	63	8	4	**08208**
8	1,0	21	7,7	25	27	63	8	4	**08210**
8	1,2	21	7,7	25	27	63	8	4	**08212**
8	1,5	21	7,7	25	27	63	8	4	**08215**
8	2,0	21	7,7	25	27	63	8	4	**08220**
10	0,2	22	9,7	30	32	72	10	4	**10202**
10	0,5	22	9,7	30	32	72	10	4	**10205**
10	1,0	22	9,7	30	32	72	10	4	**10210**
10	1,2	22	9,7	30	32	72	10	4	**10212**
10	1,5	22	9,7	30	32	72	10	4	**10215**
10	1,6	22	9,7	30	32	72	10	4	**10216**
10	2,0	22	9,7	30	32	72	10	4	**10220**
12	0,2	26	11,6	36	38	83	12	4	**12202**
12	0,5	26	11,6	36	38	83	12	4	**12205**
12	1,0	26	11,6	36	38	83	12	4	**12210**
12	1,2	26	11,6	36	38	83	12	4	**12212**
12	1,5	26	11,6	36	38	83	12	4	**12215**
12	1,6	26	11,6	36	38	83	12	4	**12216**
12	2,0	26	11,6	36	38	83	12	4	**12220**
12	2,5	26	11,6	36	38	83	12	4	**12225**
12	3,0	26	11,6	36	38	83	12	4	**12230**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 340+341

Continued on next page

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm

NCR | λ_s=35° α_s=38° γ_s= 7° | HPC



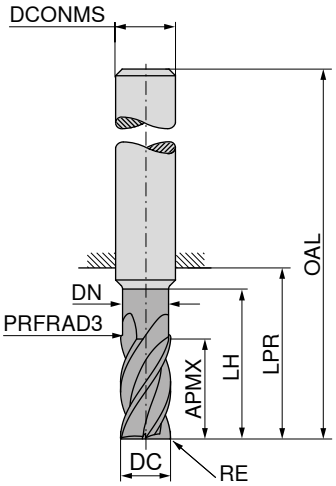

DPA52S

DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	
16	0,3	36	15,5	42	44	92	16	4	**16203**
16	1,0	36	15,5	42	44	92	16	4	**16210**
16	1,6	36	15,5	42	44	92	16	4	**16216**
16	2,0	36	15,5	42	44	92	16	4	**16220**
16	2,5	36	15,5	42	44	92	16	4	**16225**
16	3,0	36	15,5	42	44	92	16	4	**16230**
16	3,2	36	15,5	42	44	92	16	4	**16232**
16	4,0	36	15,5	42	44	92	16	4	**16240**
20	0,3	41	19,5	52	54	104	20	4	**20203**
20	1,0	41	19,5	52	54	104	20	4	**20210**
20	2,0	41	19,5	52	54	104	20	4	**20220**
20	3,0	41	19,5	52	54	104	20	4	**20230**
20	4,0	41	19,5	52	54	104	20	4	**20240**
20	5,0	41	19,5	52	54	104	20	4	**20250**
20	6,3	41	19,5	52	54	104	20	4	**20263**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 340+341

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm





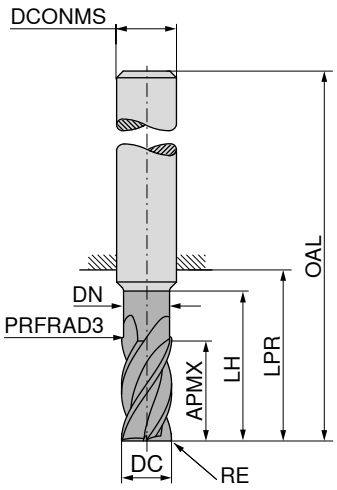

DPA52S

DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	
4	0,1	8,5	3,8	20	26	62	6	4	**04401**
4	0,2	8,5	3,8	20	26	62	6	4	**04402**
4	0,4	8,5	3,8	20	26	62	6	4	**04404**
4	0,5	8,5	3,8	20	26	62	6	4	**04405**
5	0,1	10,5	4,8	25	34	70	6	4	**05401**
5	0,5	10,5	4,8	25	34	70	6	4	**05405**
5	1,0	10,5	4,8	25	34	70	6	4	**05410**
6	0,1	13,0	5,8	30	34	70	6	4	**06401**
6	0,4	13,0	5,8	30	34	70	6	4	**06404**
6	0,5	13,0	5,8	30	34	70	6	4	**06405**
6	0,6	13,0	5,8	30	34	70	6	4	**06406**
6	0,8	13,0	5,8	30	34	70	6	4	**06408**
6	1,0	13,0	5,8	30	34	70	6	4	**06410**
6	1,5	13,0	5,8	30	34	70	6	4	**06415**
8	0,2	17,0	7,7	40	44	80	8	4	**08402**
8	0,5	17,0	7,7	40	44	80	8	4	**08405**
8	0,8	17,0	7,7	40	44	80	8	4	**08408**
8	1,0	17,0	7,7	40	44	80	8	4	**08410**
8	1,2	17,0	7,7	40	44	80	8	4	**08412**
8	1,5	17,0	7,7	40	44	80	8	4	**08415**
8	2,0	17,0	7,7	40	44	80	8	4	**08420**
10	0,2	21,0	9,7	50	54	94	10	4	**10402**
10	0,5	21,0	9,7	50	54	94	10	4	**10405**
10	1,0	21,0	9,7	50	54	94	10	4	**10410**
10	1,2	21,0	9,7	50	54	94	10	4	**10412**
10	1,5	21,0	9,7	50	54	94	10	4	**10415**
10	1,6	21,0	9,7	50	54	94	10	4	**10416**
10	2,0	21,0	9,7	50	54	94	10	4	**10420**
12	0,2	25,0	11,6	60	65	110	12	4	**12402**
12	0,5	25,0	11,6	60	65	110	12	4	**12405**
12	1,0	25,0	11,6	60	65	110	12	4	**12410**
12	1,2	25,0	11,6	60	65	110	12	4	**12412**
12	1,5	25,0	11,6	60	65	110	12	4	**12415**
12	1,6	25,0	11,6	60	65	110	12	4	**12416**
12	2,0	25,0	11,6	60	65	110	12	4	**12420**
12	2,5	25,0	11,6	60	65	110	12	4	**12425**
12	3,0	25,0	11,6	60	65	110	12	4	**12430**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 342+343

Continued on next page

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm

NCR | λ_s=35° γ_s= 7° | HPC

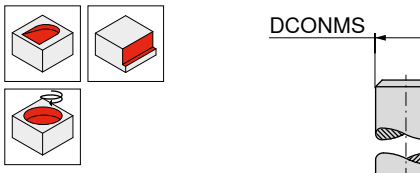

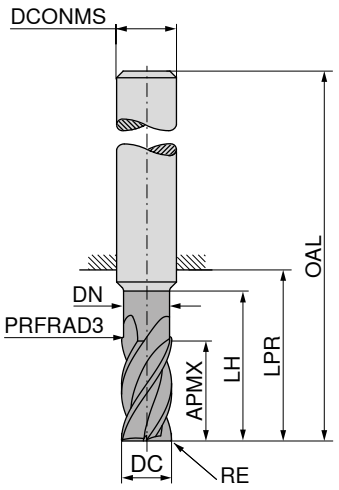

DPA52S

DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	
16	0,3	33,0	15,5	80	84	132	16	4	**16403**
16	1,0	33,0	15,5	80	84	132	16	4	**16410**
16	1,6	33,0	15,5	80	84	132	16	4	**16416**
16	2,0	33,0	15,5	80	84	132	16	4	**16420**
16	2,5	33,0	15,5	80	84	132	16	4	**16425**
16	3,0	33,0	15,5	80	84	132	16	4	**16430**
16	3,2	33,0	15,5	80	84	132	16	4	**16432**
16	4,0	33,0	15,5	80	84	132	16	4	**16440**
20	0,3	42,0	19,5	100	104	154	20	4	**20403**
20	1,0	42,0	19,5	100	104	154	20	4	**20410**
20	2,0	42,0	19,5	100	104	154	20	4	**20420**
20	3,0	42,0	19,5	100	104	154	20	4	**20430**
20	4,0	42,0	19,5	100	104	154	20	4	**20440**
20	5,0	42,0	19,5	100	104	154	20	4	**20450**
20	6,3	42,0	19,5	100	104	154	20	4	**20463**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 342+343

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm

NCR | λ_s=35° γ_s= 7° | HPC

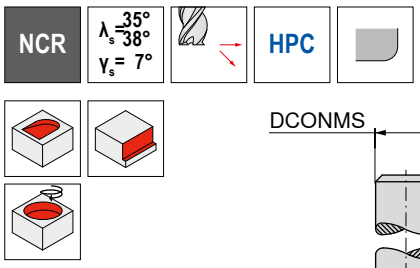

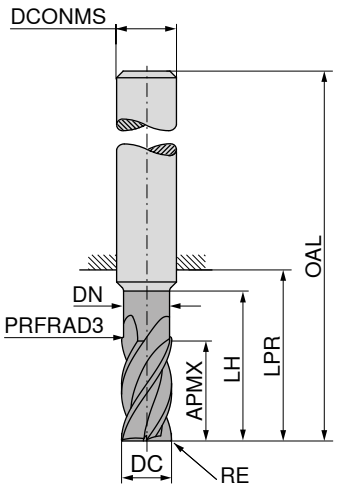

DPA52S

DRAGONSKIN

Factory standard

53 031 ...

DC $_{f8}$ mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	
6	0,1	13	5,8	19	21	57	6	5	**06201**
6	0,4	13	5,8	19	21	57	6	5	**06204**
6	0,5	13	5,8	19	21	57	6	5	**06205**
6	0,6	13	5,8	19	21	57	6	5	**06206**
6	0,8	13	5,8	19	21	57	6	5	**06208**
6	1,0	13	5,8	19	21	57	6	5	**06210**
6	1,5	13	5,8	19	21	57	6	5	**06215**
8	0,2	19	7,7	25	27	63	8	5	**08202**
8	0,5	21	7,7	25	27	63	8	5	**08205**
8	0,8	21	7,7	25	27	63	8	5	**08208**
8	1,0	21	7,7	25	27	63	8	5	**08210**
8	1,2	21	7,7	25	27	63	8	5	**08212**
8	1,5	21	7,7	25	27	63	8	5	**08215**
8	2,0	21	7,7	25	27	63	8	5	**08220**
10	0,2	22	9,7	30	32	72	10	5	**10202**
10	0,5	22	9,7	30	32	72	10	5	**10205**
10	1,0	22	9,7	30	32	72	10	5	**10210**
10	1,2	22	9,7	30	32	72	10	5	**10212**
10	1,5	22	9,7	30	32	72	10	5	**10215**
10	1,6	22	9,7	30	32	72	10	5	**10216**
10	2,0	22	9,7	30	27	72	10	5	**10220**
12	0,2	26	11,6	36	38	83	12	5	**12202**
12	0,5	26	11,6	36	38	83	12	5	**12205**
12	1,0	26	11,6	36	38	83	12	5	**12210**
12	1,2	26	11,6	36	38	83	12	5	**12212**
12	1,5	26	11,6	36	38	83	12	5	**12215**
12	1,6	26	11,6	36	38	83	12	5	**12216**
12	2,0	26	11,6	36	38	83	12	5	**12220**
12	2,5	26	11,6	36	38	83	12	5	**12225**
12	3,0	26	11,6	36	38	83	12	5	**12230**
16	0,3	36	15,5	42	44	92	16	5	**16203**
16	1,0	36	15,5	42	44	92	16	5	**16210**
16	1,6	36	15,5	42	44	92	16	5	**16216**
16	2,0	36	15,5	42	44	92	16	5	**16220**
16	2,5	36	15,5	42	44	92	16	5	**16225**
16	3,0	36	15,5	42	44	92	16	5	**16230**
16	3,2	36	15,5	42	44	92	16	5	**16232**
16	4,0	36	15,5	42	44	92	16	5	**16240**
20	0,3	41	19,5	52	54	104	20	5	**20203**
20	2,0	41	19,5	52	54	104	20	5	**20220**
20	3,0	41	19,5	52	54	104	20	5	**20230**
20	4,0	41	19,5	52	54	104	20	5	**20240**
20	5,0	41	19,5	52	54	104	20	5	**20250**
20	6,3	41	19,5	52	54	104	20	5	**20263**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 340

MonsterMill – Ball Nosed Cutter

The specialist for machining nickel-based alloys

NCR

λ_s = 35°
γ_s = 7°



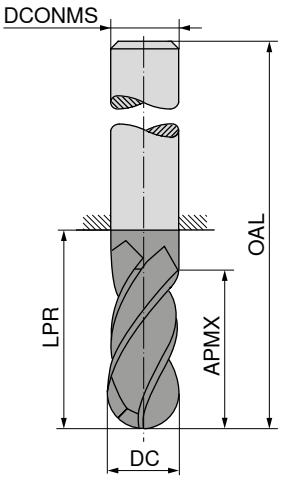

NEW
DPA52S
DRAGONSKIN

Factory standard

53 032 ...

NEW
DPA52S
DRAGONSKIN

Factory standard

53 033 ...

DC ±0,01 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP		
2	4	18	54	6	4	**02210**	
2	4	44	80	6	4		**02410**
3	5	18	54	6	4	**03215**	
3	5	44	80	6	4		**03415**
4	8	18	54	6	4	**04220**	
4	8	44	80	6	4		**04420**
5	9	18	54	6	4	**05225**	
5	9	44	80	6	4		**05425**
6	10	18	54	6	4	**06230**	
6	10	44	80	6	4		**06430**
8	12	22	58	8	4	**08240**	
8	12	64	100	8	4		**08440**
10	14	26	66	10	4	**10250**	
10	14	60	100	10	4		**10450**
12	16	28	73	12	4	**12260**	
12	16	55	100	12	4		**12460**
16	20	34	82	16	4	**16280**	
16	20	52	100	16	4		**16480**

P		
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 342+343

MonsterMill – Finish milling cutter with corner radius

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

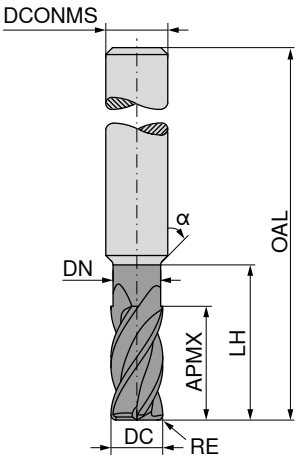

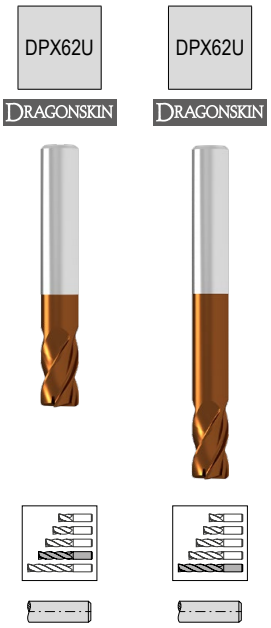

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 603 ...	53 604 ...
0,2	0,05	0,5		0,5	30	48	4	2,5 x DC	2	**30205**	
0,2	0,05	0,5	0,18	1,0	30	48	4	5 x DC	2	**40205**	
0,3	0,05	0,6	0,27	1,0	30	48	4	3,3 x DC	2	**30305**	
0,3	0,05	0,6	0,27	2,0	30	48	4	6,7 x DC	2	**40305**	
0,4	0,05	0,7	0,35	1,0	30	48	4	2,5 x DC	2	**30405**	
0,4	0,05	0,7	0,35	2,0	30	48	4	5 x DC	2	**40405**	
0,4	0,05	0,7	0,35	3,0	30	48	4	7,5 x DC	2	**50405**	
0,5	0,05	0,7	0,45	1,0	30	48	4	2 x DC	2	**30505**	
0,5	0,05	0,7	0,45	2,0	30	48	4	4 x DC	2	**40505**	
0,5	0,05	0,7	0,45	2,5	30	48	4	5 x DC	2	**50505**	
0,5	0,05	0,7	0,45	3,0	30	48	4	6 x DC	2	**60505**	
0,5	0,05	0,7	0,45	4,0	30	48	4	8 x DC	2	**70505**	
0,6	0,05	0,8	0,55	2,0	30	48	4	3,3 x DC	2	**30605**	
0,6	0,05	0,8	0,55	3,0	30	48	4	5 x DC	2	**40605**	
0,6	0,05	0,8	0,55	4,5	30	48	4	7,5 x DC	2	**50605**	
0,6	0,05	0,8	0,55	6,0	30	48	4	10 x DC	2		**30605**
0,8	0,05	1,0	0,75	2,0	30	48	4	2,5 x DC	2	**30805**	
0,8	0,05	1,0	0,75	4,0	30	48	4	5 x DC	2	**40805**	
0,8	0,05	1,0	0,75	6,0	30	48	4	7,5 x DC	2	**50805**	
0,8	0,05	1,0	0,75	8,0	30	48	4	10 x DC	2		**30805**
0,8	0,05	1,0	0,75	10,0	30	48	4	12,5 x DC	2		**40805**
1,0	0,10	1,5	0,95	2,0	30	48	4	2 x DC	4	**31001**	
1,0	0,10	1,5	0,95	4,0	30	48	4	4 x DC	4	**41001**	
1,0	0,10	1,5	0,95	6,0	30	48	4	6 x DC	4	**51001**	
1,0	0,10	1,5	0,95	8,0	30	48	4	8 x DC	4	**61001**	
1,0	0,10	1,5	0,95	10,0	30	48	4	10 x DC	4		**31001**
1,0	0,10	1,5	0,95	14,0	30	48	4	14 x DC	4		**41001**
1,5	0,10	2,0	1,45	4,0	30	48	4	2,7 x DC	4	**31501**	
1,5	0,10	2,0	1,45	6,0	30	48	4	4 x DC	4	**41501**	
1,5	0,10	2,0	1,45	10,0	30	48	4	6,7 x DC	4	**51501**	
1,5	0,10	2,0	1,45	12,0	30	48	4	8 x DC	4	**61501**	
1,5	0,10	2,0	1,45	15,0	30	60	4	10 x DC	4		**31501**
1,5	0,10	2,0	1,45	20,0	30	60	4	13,3 x DC	4		**41501**
2,0	0,20	2,5	1,90	4,0	30	48	4	2 x DC	4	**32002**	
2,0	0,20	2,5	1,90	6,0	30	48	4	3 x DC	4	**42002**	
2,0	0,20	2,5	1,90	8,0	30	48	4	4 x DC	4	**52002**	
2,0	0,20	2,5	1,90	10,0	30	48	4	5 x DC	4	**62002**	
2,0	0,20	2,5	1,90	12,0	30	48	4	6 x DC	4	**72002**	
2,0	0,20	2,5	1,90	16,0	30	60	4	8 x DC	4	**82002**	
2,0	0,20	2,5	1,90	20,0	30	60	4	10 x DC	4		**32002**
2,0	0,20	2,5	1,90	25,0	30	60	4	12,5 x DC	4		**42002**
3,0	0,20	3,5	2,90	8,0	30	60	6	2,7 x DC	4	**33002**	

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 344–349

Continued on next page

MonsterMill – Finish milling cutter with corner radius

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

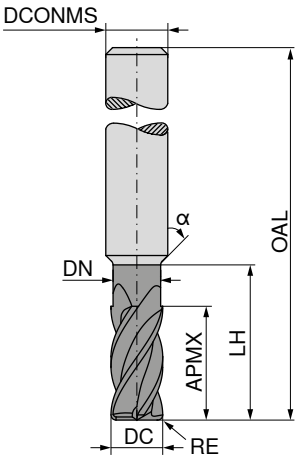

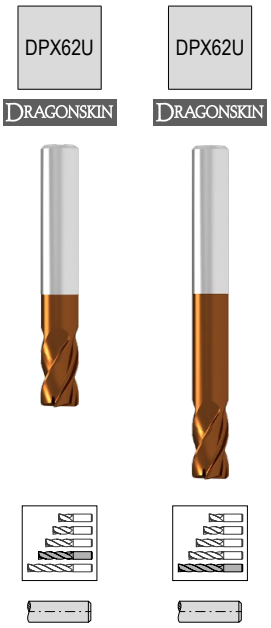

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 603 ...	53 604 ...
3,0	0,20	3,5	2,90	12,0	30	60	6	4 x DC	4	**43002**	
3,0	0,20	3,5	2,90	16,0	30	60	6	5,3 x DC	4	**53002**	
3,0	0,20	3,5	2,90	20,0	30	70	6	6,7 x DC	4	**63002**	
3,0	0,20	3,5	2,90	24,0	30	70	6	8 x DC	4	**73002**	
4,0	0,20	4,5	3,90	8,0	30	60	6	2 x DC	4	**34002**	
4,0	0,20	4,5	3,90	12,0	30	60	6	3 x DC	4	**44002**	
4,0	0,20	4,5	3,90	16,0	30	60	6	4 x DC	4	**54002**	
4,0	0,20	4,5	3,90	20,0	30	70	6	5 x DC	4	**64002**	
4,0	0,20	4,5	3,90	24,0	30	70	6	6 x DC	4	**74002**	
4,0	0,20	4,5	3,90	28,0	30	70	6	7 x DC	4	**84002**	
4,0	0,50	4,5	3,90	8,0	30	60	6	2 x DC	4	**34005**	
4,0	0,50	4,5	3,90	12,0	30	60	6	3 x DC	4	**44005**	
4,0	0,50	4,5	3,90	16,0	30	60	6	4 x DC	4	**54005**	
4,0	0,50	4,5	3,90	20,0	30	70	6	5 x DC	4	**64005**	
4,0	0,50	4,5	3,90	24,0	30	70	6	6 x DC	4	**74005**	
4,0	0,50	4,5	3,90	28,0	30	70	6	7 x DC	4	**84005**	
4,0	1,00	4,5	3,90	8,0	30	60	6	2 x DC	4	**34010**	
4,0	1,00	4,5	3,90	12,0	30	60	6	3 x DC	4	**44010**	
4,0	1,00	4,5	3,90	16,0	30	60	6	4 x DC	4	**54010**	
4,0	1,00	4,5	3,90	20,0	30	70	6	5 x DC	4	**64010**	
4,0	1,00	4,5	3,90	24,0	30	70	6	6 x DC	4	**74010**	
4,0	1,00	4,5	3,90	28,0	30	70	6	7 x DC	4	**84010**	
6,0	0,20	6,5	5,90	12,0		60	6	2 x DC	4	**36002**	
6,0	0,20	6,5	5,90	16,0		60	6	2,7 x DC	4	**46002**	
6,0	0,20	6,5	5,90	20,0		60	6	3,3 x DC	4	**56002**	
6,0	0,50	6,5	5,90	12,0		60	6	2 x DC	4	**36005**	
6,0	0,50	6,5	5,90	16,0		60	6	2,7 x DC	4	**46005**	
6,0	0,50	6,5	5,90	20,0		60	6	3,3 x DC	4	**56005**	
6,0	1,00	6,5	5,90	12,0		60	6	2 x DC	4	**36010**	
6,0	1,00	6,5	5,90	16,0		60	6	2,7 x DC	4	**46010**	
6,0	1,00	6,5	5,90	20,0		60	6	3,3 x DC	4	**56010**	
8,0	0,50	8,5	7,90	16,0		60	8	2 x DC	4	**38005**	
8,0	0,50	8,5	7,90	40,0		80	8	5 x DC	4	**48005**	
8,0	1,00	8,5	7,90	16,0		60	8	2 x DC	4	**38010**	
8,0	1,00	8,5	7,90	40,0		80	8	5 x DC	4	**48010**	
10,0	0,50	10,5	9,90	20,0		70	10	2 x DC	4	**10005**	
10,0	0,50	10,5	9,90	40,0		90	10	4 x DC	4	**10105**	
10,0	1,00	10,5	9,90	20,0		70	10	2 x DC	4	**10010**	
10,0	1,00	10,5	9,90	40,0		90	10	4 x DC	4	**10110**	
12,0	1,00	12,5	11,90	24,0		70	12	2 x DC	4	**12010**	
12,0	1,00	12,5	11,90	40,0		90	12	3,3 x DC	4	**12110**	

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 344–349

14

MonsterMill – Finish milling cutter with corner radius

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/-0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s = 50° γ_s = –15° | 54–70 HRC

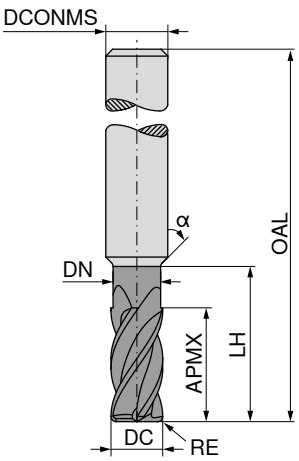



Factory standard | Factory standard

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 605 ...	53 606 ...
1	0,03	2			30	48	4	2 x DC	4	**410**	
1	0,03	3	0,95	4	30	48	4	3 x DC	4		**410**
2	0,03	4			30	48	4	2 x DC	4	**420**	
2	0,03	6	1,90	8	30	48	4	3 x DC	4		**420**
3	0,03	6			30	60	6	2 x DC	4	**030**	
3	0,03	9	2,90	12	30	60	6	3 x DC	4		**030**
4	0,05	8			30	60	6	2 x DC	4	**040**	
4	0,05	12	3,90	16	30	60	6	3 x DC	4		**040**
6	0,05	12				60	6	2 x DC	4	**060**	
6	0,05	18	5,90	24		60	6	3 x DC	4		**060**
8	0,05	16				60	8	2 x DC	4	**080**	
8	0,05	24	7,90	32		70	8	3 x DC	4		**080**
10	0,05	20				70	10	2 x DC	4	**100**	
10	0,05	30	9,90	40		80	10	3 x DC	4		**100**
12	0,05	24				70	12	2 x DC	4	**120**	
12	0,05	36	11,90	44		90	12	3 x DC	4		**120**

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 350

MonsterMill – Ball Nosed Cutter

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy: ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

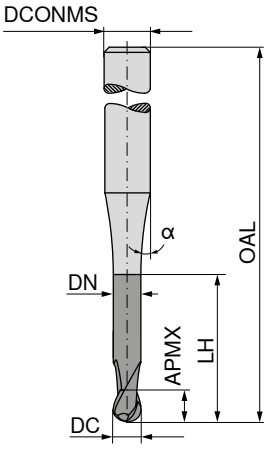

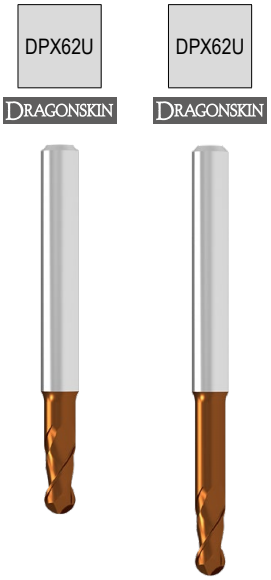



DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 600 ...	53 601 ...
0,2	0,5		0,5	15	48	4	2,5 x DC	2	**302**	
0,2	0,5	0,18	1,0	15	48	4	5 x DC	2	**402**	
0,3	0,5	0,27	1,0	15	48	4	3,3 x DC	2	**303**	
0,3	0,5	0,27	2,0	15	48	4	6,7 x DC	2	**403**	
0,4	0,5	0,35	1,0	15	48	4	2,5 x DC	2	**304**	
0,4	0,5	0,35	2,0	15	48	4	5 x DC	2	**404**	
0,4	0,5	0,35	3,0	15	48	4	7,5 x DC	2	**504**	
0,5	0,5	0,45	1,0	15	48	4	2 x DC	2	**305**	
0,5	0,5	0,45	2,0	15	48	4	4 x DC	2	**405**	
0,5	0,5	0,45	2,5	15	48	4	5 x DC	2	**505**	
0,5	0,5	0,45	3,0	15	48	4	6 x DC	2	**605**	
0,5	0,5	0,45	4,0	15	48	4	8 x DC	2	**705**	
0,6	0,6	0,55	2,0	15	48	4	3,3 x DC	2	**306**	
0,6	0,6	0,55	3,0	15	48	4	5 x DC	2	**406**	
0,6	0,6	0,55	4,5	15	48	4	7,5 x DC	2	**506**	
0,6	0,6	0,55	6,0	15	48	4	10 x DC	2		**306**
0,8	1,0	0,75	2,0	15	48	4	2,5 x DC	2	**308**	
0,8	1,0	0,75	4,0	15	48	4	5 x DC	2	**408**	
0,8	1,0	0,75	6,0	15	48	4	7,5 x DC	2	**508**	
0,8	1,0	0,75	8,0	15	48	4	10 x DC	2		**308**
0,8	1,0	0,75	10,0	15	48	4	12,5 x DC	2		**408**
1,0	1,5	0,95	2,0	15	48	4	2 x DC	2	**310**	
1,0	1,5	0,95	4,0	15	48	4	4 x DC	2	**410**	
1,0	1,5	0,95	6,0	15	48	4	6 x DC	2	**510**	
1,0	1,5	0,95	8,0	15	48	4	8 x DC	2	**610**	
1,0	1,5	0,95	10,0	15	48	4	10 x DC	2		**310**
1,0	1,5	0,95	14,0	15	48	4	14 x DC	2		**410**
1,5	1,5	1,45	4,0	15	48	4	2,7 x DC	2	**315**	
1,5	1,5	1,45	6,0	15	48	4	4 x DC	2	**415**	
1,5	1,5	1,45	8,0	15	48	4	5,3 x DC	2	**515**	
1,5	1,5	1,45	10,0	15	48	4	6,7 x DC	2	**615**	
1,5	1,5	1,45	15,0	15	60	4	10 x DC	2		**315**

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 352+353

Continued on next page

MonsterMill – Ball Nosed Cutter

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy: ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

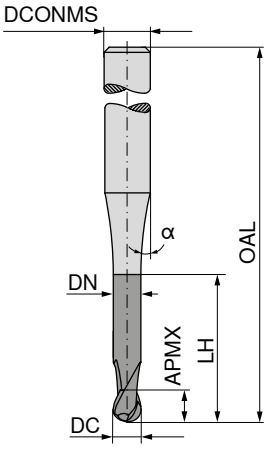

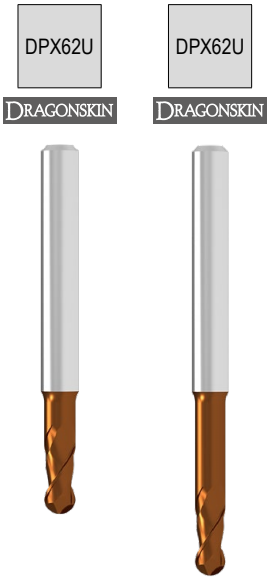



Factory standard | Factory standard

DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 600 ...	53 601 ...
1,5	1,5	1,45	20,0	15	60	4	13,3 x DC	2		**415**
2,0	2,5	1,90	4,0	15	48	4	2 x DC	2	**320**	
2,0	2,5	1,90	6,0	15	48	4	3 x DC	2	**420**	
2,0	2,5	1,90	8,0	15	48	4	4 x DC	2	**520**	
2,0	2,5	1,90	10,0	15	48	4	5 x DC	2	**620**	
2,0	2,5	1,90	12,0	15	48	4	6 x DC	2	**720**	
2,0	2,5	1,90	16,0	15	60	4	8 x DC	2	**820**	
2,0	2,5	1,90	20,0	15	60	4	10 x DC	2		**320**
2,0	2,5	1,90	25,0	15	60	4	12,5 x DC	2		**420**
3,0	3,5	2,90	8,0	15	60	6	2,7 x DC	2	**330**	
3,0	3,5	2,90	12,0	15	60	6	4 x DC	2	**430**	
3,0	3,5	2,90	16,0	15	60	6	5,3 x DC	2	**530**	
3,0	3,5	2,90	20,0	15	70	6	6,7 x DC	2	**630**	
3,0	3,5	2,90	24,0	15	70	6	8 x DC	2	**730**	
4,0	4,5	3,90	8,0	15	60	6	2 x DC	2	**340**	
4,0	4,5	3,90	12,0	15	60	6	3 x DC	2	**440**	
4,0	4,5	3,90	16,0	15	60	6	4 x DC	2	**540**	
4,0	4,5	3,90	20,0	15	70	6	5 x DC	2	**640**	
4,0	4,5	3,90	24,0	15	70	6	6 x DC	2	**740**	
4,0	4,5	3,90	28,0	15	70	6	7 x DC	2	**840**	
6,0	6,5	5,90	12,0		60	6	2 x DC	2	**360**	
6,0	6,5	5,90	16,0		60	6	2,7 x DC	2	**460**	
6,0	6,5	5,90	20,0		60	6	3,3 x DC	2	**560**	
8,0	8,5	7,90	16,0		60	8	2 x DC	2	**380**	
8,0	8,5	7,90	40,0		80	8	5 x DC	2	**480**	
10,0	10,5	9,90	20,0	15	70	10	2 x DC	2	**100**	
10,0	10,5	9,90	40,0		90	10	4 x DC	2	**101**	
12,0	12,5	11,90	24,0		75	12	2 x DC	2	**120**	
12,0	12,5	11,90	40,0		90	12	3,3 x DC	2	**121**	

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 352+353

MonsterMill – Ball Nosed Cutter

The specialist for finish machining tempered steel up to 70 HRC

▲ Radius accuracy: ± 0,01 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

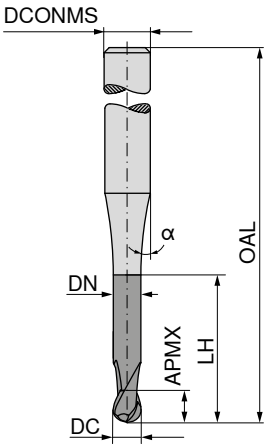

DPX62U

DRAGONSKIN

Factory standard

53 602 ...

DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	
3	3,5	2,9	8	15	60	6	2,7 x DC	4	**330**
3	3,5	2,9	12	15	60	6	4 x DC	4	**430**
3	3,5	2,9	16	15	60	6	5,3 x DC	4	**530**
3	3,5	2,9	20	15	70	6	6,7 x DC	4	**630**
3	3,5	2,9	24	15	70	6	8 x DC	4	**730**
4	4,5	3,9	8	15	60	6	2 x DC	4	**340**
4	4,5	3,9	12	15	60	6	3 x DC	4	**440**
4	4,5	3,9	16	15	60	6	4 x DC	4	**540**
4	4,5	3,9	20	15	70	6	5 x DC	4	**640**
4	4,5	3,9	24	15	70	6	6 x DC	4	**740**
4	4,5	3,9	28	15	70	6	7 x DC	4	**840**
6	6,5	5,9	12		60	6	2 x DC	4	**360**
6	6,5	5,9	16		60	6	2,7 x DC	4	**460**
6	6,5	5,9	20		60	6	3,3 x DC	4	**560**
8	8,5	7,9	16		60	8	2 x DC	4	**380**
8	8,5	7,9	40		80	8	5 x DC	4	**480**
10	10,5	9,9	20		70	10	2 x DC	4	**100**
10	10,5	9,9	40		90	10	4 x DC	4	**101**
12	12,5	11,9	24		75	12	2 x DC	4	**120**
12	12,5	11,9	40		90	12	3,3 x DC	4	**121**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 351

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

PCR UNI | λ_s = 36° 38° | γ_s = 8° | HPC



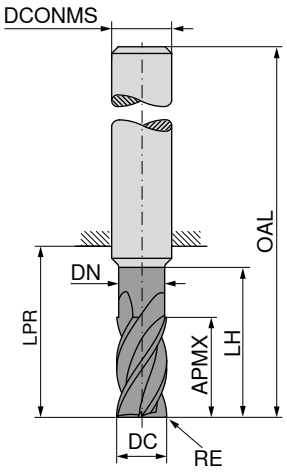

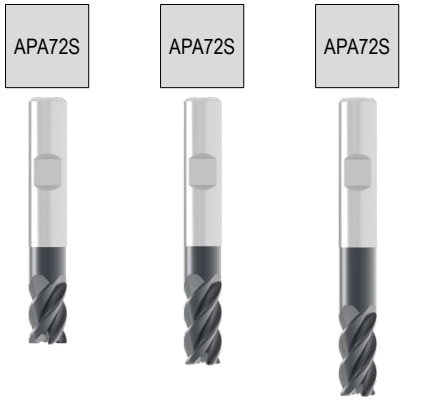



DIN 6527 | DIN 6527 | DIN 6527



DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 613 ...	52 614 ...	52 615 ...
5,0	0,20	9			18	54	6	4	05000		
5,0	0,20	13	4,8	19	21	57	6	4		05000	
5,0	0,20	13	4,8	24	26	62	6	4			05000
5,7	0,20	10			18	54	6	4	057		
5,7	0,20	13	5,5	19	21	57	6	4		057	
5,7	0,20	13	5,5	24	26	62	6	4			057
6,0	0,20	10			18	54	6	4	060		
6,0	0,20	13	5,8	19	21	57	6	4		060	
6,0	0,20	13	5,8	24	26	62	6	4			060
6,7	0,20	11			22	58	8	4	067		
6,7	0,20	16	6,5	25	27	63	8	4		067	
6,7	0,20	16	6,4	30	32	68	8	4			067
7,0	0,20	11			22	58	8	4	070		
7,0	0,20	16	6,8	25	27	63	8	4		070	
7,0	0,20	16	6,7	30	32	68	8	4			070
7,7	0,20	12			22	58	8	4	077		
7,7	0,20	19	7,5	25	27	63	8	4		077	
7,7	0,20	21	7,4	30	32	68	8	4			077
8,0	0,20	12			22	58	8	4	080		
8,0	0,20	19	7,8	25	27	63	8	4		080	
8,0	0,20	21	7,7	30	32	68	8	4			080
8,7	0,32	13			26	66	10	4	087		
8,7	0,32	19	8,5	30	32	72	10	4		087	
8,7	0,32	22	8,4	38	40	80	10	4			087
9,0	0,32	13			26	66	10	4	090		
9,0	0,32	19	8,8	30	32	72	10	4		090	
9,0	0,32	22	8,7	38	40	80	10	4			090
9,7	0,32	14			26	66	10	4	097		
9,7	0,32	22	9,5	30	32	72	10	4		097	
9,7	0,32	22	9,4	38	40	80	10	4			097
10,0	0,32	14			26	66	10	4	100		
10,0	0,32	22	9,8	30	32	72	10	4		100	
10,0	0,32	22	9,7	38	40	80	10	4			100
11,7	0,32	16			28	73	12	4	117		
11,7	0,32	26	11,5	36	38	83	12	4		117	
11,7	0,32	26	11,3	46	48	93	12	4			117
12,0	0,32	16			28	73	12	4	120		
12,0	0,32	26	11,8	36	38	83	12	4		120	
12,0	0,32	26	11,6	46	48	93	12	4			120
P									●	●	●
M									○	○	○
K									●	●	●
N											
S											
H											
O											

→ v_c/f_z Page 354+355

Continued on next page

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

PCR
UNI

λ_s = 36°
38°
γ_s = 8°

HPC



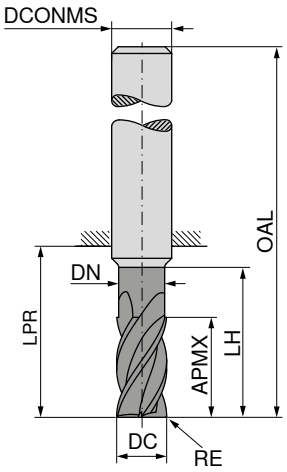







DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 613 ...	52 614 ...	52 615 ...
13,7	0,32	18			30	75	14	4	137		
13,7	0,32	26	13,5	36	38	83	14	4		137	
13,7	0,32	26	13,3	52	54	99	14	4			137
14,0	0,32	18			30	75	14	4	140		
14,0	0,32	26	13,8	36	38	83	14	4		140	
14,0	0,32	26	13,6	52	54	99	14	4			140
15,5	0,32	22			34	82	16	4	155		
15,5	0,32	32	15,3	42	44	92	16	4		155	
15,5	0,32	36	15,0	58	60	108	16	4			155
16,0	0,32	22			34	82	16	4	160		
16,0	0,32	32	15,8	42	44	92	16	4		160	
16,0	0,32	36	15,5	58	60	108	16	4			160
17,5	0,32	24			36	84	18	4	175		
17,5	0,32	32	17,3	42	44	92	18	4		175	
17,5	0,32	36	17,0	67	69	117	18	4			175
18,0	0,32	24			36	84	18	4	180		
18,0	0,32	32	17,8	42	44	92	18	4		180	
18,0	0,32	36	17,5	67	69	117	18	4			180
19,5	0,50	26			42	92	20	4	195		
19,5	0,50	38	19,3	52	54	104	20	4		195	
19,5	0,50	41	19,0	74	76	126	20	4			195
20,0	0,50	26			42	92	20	4	200		
20,0	0,50	38	19,8	52	54	104	20	4		200	
20,0	0,50	41	19,5	74	76	126	20	4			200
P									●	●	●
M									○	○	○
K									●	●	●
N											
S											
H											
O											

14

→ v_c/f_z Page 354+355

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

▲ suitable for trochoidal milling
▲ Chip breaker 0.9 x DC

PCR UNI | λ_s=36° γ_s=10° | HPC



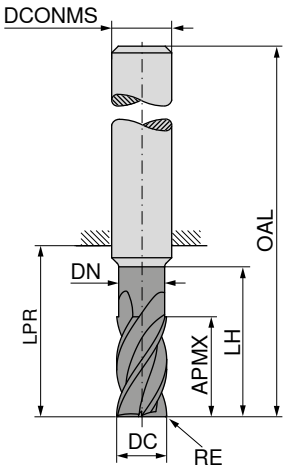

APA72S

DIN 6527

52 619 ...

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
5	0,20	17	4,8	24	26	62	6	4	**05202**
6	0,20	17	5,8	25	26	62	6	4	**06202**
8	0,20	24	7,7	30	32	68	8	4	**08202**
10	0,32	30	9,7	35	40	80	10	4	**10203**
12	0,32	36	11,6	45	48	93	12	4	**12203**
14	0,32	42	13,6	50	54	99	14	4	**14203**
16	0,32	48	15,5	56	60	108	16	4	**16203**
18	0,32	54	17,5	67	69	117	18	4	**18203**
20	0,50	60	19,5	70	76	126	20	4	**20205**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 356+357

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

PCR ALU | λ_s=36° γ_s=13° | HPC



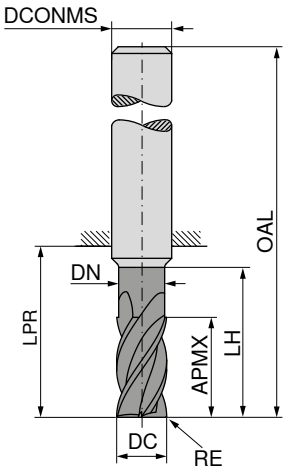

DLC DRAGONSKIN | DLC DRAGONSKIN

DIN 6527 | DIN 6527

DC f8	RE ±0,03	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	52 616 ...		52 617 ...
mm	mm	mm	mm	mm	mm	mm	mm				
5,0	0,20	13	4,8	19	21	57	6	4	050		
5,0	0,20	13	4,8	24	26	62	6	4			050
5,7	0,20	13	5,5	19	21	57	6	4	057		
5,7	0,20	13	5,5	24	26	62	6	4			057
6,0	0,20	13	5,8	19	21	57	6	4	060		
6,0	0,20	13	5,8	24	26	62	6	4			060
7,7	0,20	19	7,5	25	27	63	8	4	077		
7,7	0,20	21	7,4	30	32	68	8	4			077
8,0	0,20	19	7,8	25	27	63	8	4	080		
8,0	0,20	21	7,7	30	32	68	8	4			080
9,0	0,32	19	8,8	30	32	72	10	4	090		
9,0	0,32	22	8,7	38	40	80	10	4			090
9,7	0,32	22	9,5	30	32	72	10	4	097		
9,7	0,32	22	9,4	38	40	80	10	4			097
10,0	0,32	22	9,8	30	32	72	10	4	100		
10,0	0,32	22	9,7	38	40	80	10	4			100
11,7	0,32	26	11,5	36	38	83	12	4	117		
11,7	0,32	26	11,3	46	48	93	12	4			117
12,0	0,32	26	11,8	36	38	83	12	4	120		
12,0	0,32	26	11,6	46	48	93	12	4			120
13,7	0,32	26	13,5	36	38	83	14	4	137		
13,7	0,32	26	13,3	52	54	99	14	4			137
14,0	0,32	26	13,8	36	38	83	14	4	140		
14,0	0,32	26	13,6	52	54	99	14	4			140
15,5	0,32	32	15,3	42	44	92	16	4	155		
15,5	0,32	36	15,0	58	60	108	16	4			155
16,0	0,32	32	15,8	42	44	92	16	4	160		
16,0	0,32	36	15,5	58	60	108	16	4			160
17,5	0,32	32	17,3	42	44	92	18	4	175		
17,5	0,32	36	17,0	67	69	117	18	4			175
18,0	0,32	32	17,8	42	44	92	18	4	180		
18,0	0,32	36	17,5	67	69	117	18	4			180
19,5	0,50	38	19,3	52	54	104	20	4	195		
19,5	0,50	41	19,0	74	76	126	20	4			195
20,0	0,50	38	19,8	52	54	104	20	4	200		
20,0	0,50	41	19,5	74	76	126	20	4			200

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 358+359

14

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

▲ suitable for trochoidal milling
▲ Chip breaker 0.9 x DC

PCR ALU | λ_s=36° γ_s=13° | HPC



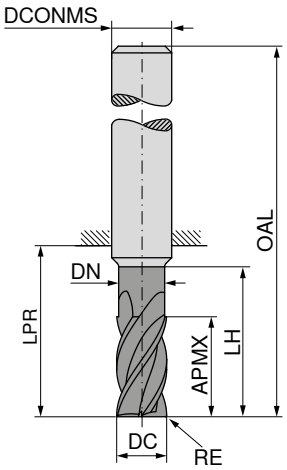

DLC

DRAGONSKIN

DIN 6527

52 618 ...

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
5	0,20	17	4,8	24	26	62	6	4	**05202**
6	0,20	18	5,8	25	26	62	6	4	**06202**
8	0,20	24	7,7	30	32	68	8	4	**08202**
10	0,32	30	9,7	35	40	80	10	4	**10203**
12	0,32	36	11,6	45	48	93	12	4	**12203**
14	0,32	42	13,6	50	54	99	14	4	**14203**
16	0,32	48	15,5	56	60	108	16	4	**16203**
18	0,32	54	17,5	67	69	117	18	4	**18203**
20	0,50	60	19,5	70	76	126	20	4	**20205**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 358–361

MonsterMill – Rough milling cutter

The specialist for rough machining steel and cast iron

▲ Cutting edges with irregular pitch
▲ With round cord profile





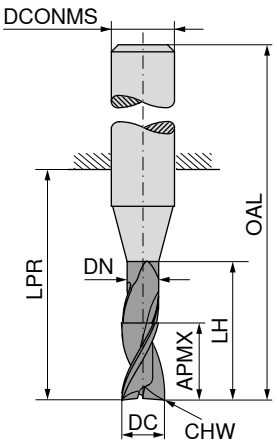



Factory standard | Factory standard | Factory standard



DC h11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 752 ...	52 752 ...	52 752 ...
1	1,5	0,9	3	10	38	3	0,09	3	010 [1]		
2	3,0	1,9	8	21	57	6	0,17	3	020		
3	5,0	2,9	14	21	57	6	0,17	3	030		
3	8,0	2,9	14	21	57	6	0,17	3		031	
3	5,0	2,9	19	26	62	6	0,17	3			032
4	8,0	3,8	18	21	57	6	0,17	3	040		
4	11,0	3,8	18	21	57	6	0,17	3		041	
4	8,0	3,8	23	26	62	6	0,17	3			042
5	9,0	4,8	19	21	57	6	0,17	3	050		
5	13,0	4,8	19	21	57	6	0,17	3		051	
5	9,0	4,8	24	26	62	6	0,17	3			052
6	10,0	5,8	20	21	57	6	0,17	4	060		
6	13,0	5,8	20	21	57	6	0,17	4		061	
6	10,0	5,8	25	26	62	6	0,17	4			062
8	12,0	7,7	25	27	63	8	0,28	4	080		
8	19,0	7,7	25	27	63	8	0,28	4		081	
8	12,0	7,7	30	32	68	8	0,28	4			082
10	15,0	9,5	30	32	72	10	0,28	4	100		
10	22,0	9,5	30	32	72	10	0,28	4		101	
10	15,0	9,5	35	40	80	10	0,28	4			102
12	18,0	11,5	35	38	83	12	0,28	4	120		
12	26,0	11,5	35	38	83	12	0,28	4		121	
12	18,0	11,5	45	48	93	12	0,28	4			122
14	21,0	13,5	35	38	83	14	0,28	4	140		
14	26,0	13,5	35	38	83	14	0,28	4		141	
14	21,0	13,5	50	54	99	14	0,28	4			142
16	24,0	15,5	40	44	92	16	0,43	4	160		
16	32,0	15,5	40	44	92	16	0,43	4		161	
16	24,0	15,5	55	60	108	16	0,43	4			162
20	30,0	19,5	50	54	104	20	0,43	4	200		
20	38,0	19,5	50	54	104	20	0,43	4		201	
20	30,0	19,5	70	76	126	20	0,43	4			202
P									●	●	●
M									○	○	○
K									●	●	●
N									○	○	○
S									○	○	○
H									○	○	○
O											

1) DIN 6535 HA Shank

→ v_c/f_z Page 362–365

14

MonsterMill – FRP CR fine pitched

The specialist for machining fibre-reinforced plastics

- ▲ Compression zone across the entire cutting length
- ▲ right-hand cutting
- ▲ fine cross-pitched version
- ▲ Two effective end cutting edges
- ▲ ≤ Ø DC 10 mm: four cutting edges 30° right-hand helix / six cutting edges 35° left-hand helix
- ▲ ≥ Ø DC 12 mm: six cutting edges 30° right-hand helix / eight cutting edges 35° left-hand helix

FRP CR





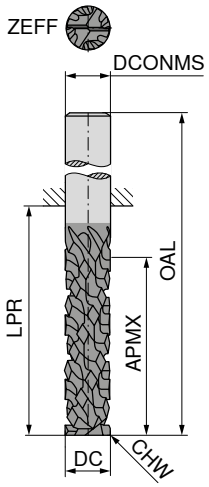

NEW

DIAMOND

Factory standard

52 598 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFF	
6,000	18	23,5	60	6,000	0,1	2	**06000**
6,350	18	23,5	60	6,350	0,1	2	**06350**
8,000	26	33,0	70	8,000	0,1	2	**08000**
9,525	30	40,0	80	9,525	0,1	2	**09525**
10,000	30	40,0	80	10,000	0,1	2	**10000**
12,000	30	41,0	85	12,000	0,1	2	**12000**
12,700	30	41,0	85	12,700	0,1	2	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f Page 329

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

MonsterMill – FRP CR coarse pitched

The specialist for machining fibre-reinforced plastics

- ▲ Compression zone across the entire cutting length
- ▲ right-hand cutting
- ▲ coarse cross-pitched version
- ▲ One effective end cutting edge
- ▲ Four cutting edges 30° right-hand helix / five cutting edges 35° left-hand helix

FRP CR





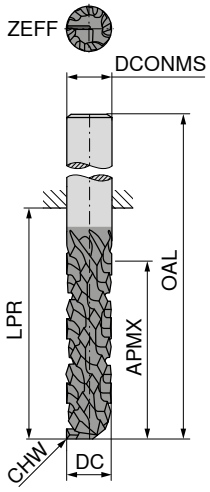

NEW

DIAMOND

Factory standard

52 599 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFF	
6,000	18	23,5	60	6,000	0,1	1	**06000**
6,350	18	23,5	60	6,350	0,1	1	**06350**
8,000	26	33,0	70	8,000	0,1	1	**08000**
9,525	30	40,0	80	9,525	0,1	1	**09525**
10,000	30	40,0	80	10,000	0,1	1	**10000**
12,000	30	41,0	85	12,000	0,1	1	**12000**
12,700	30	41,0	85	12,700	0,1	1	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f Page 329

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

14

MonsterMill – FRP

The specialist for machining fibre-reinforced plastics

- ▲ optimal removal of CFK dust
- ▲ right-hand cutting
- ▲ straight-fluted
- ▲ Four end cutting edges / two central cutting edges





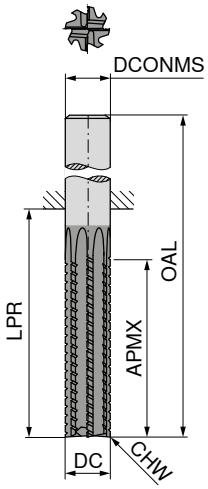

NEW

DIAMOND

Factory standard

52 595 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6,000	25	35	70	6,000	0,1	8	**06000**
6,350	25	35	70	6,350	0,1	8	**06350**
8,000	30	40	80	8,000	0,1	8	**08000**
9,525	32	44	85	9,525	0,1	8	**09525**
10,000	32	45	85	10,000	0,1	8	**10000**
12,000	32	46	95	12,000	0,1	8	**12000**
12,700	32	46	95	12,700	0,1	8	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 329

MonsterMill – FRP left-hand helix

The specialist for machining fibre-reinforced plastics

- ▲ optimal removal of CFK dust
- ▲ right-hand cutting
- ▲ slightly left-fluted, pulling cut
- ▲ Four end cutting edges / two central cutting edges

FRP

λ_s=–7°
γ_s= 0°





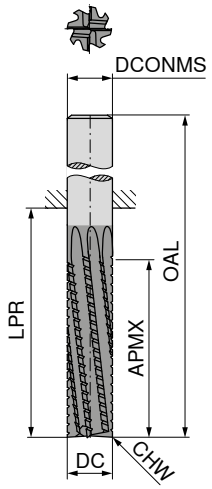

NEW

DIAMOND

Factory standard

52 596 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6,000	25	38	70	6,000	0,1	8	**06000**
6,350	25	39	70	6,350	0,1	8	**06350**
8,000	30	43	80	8,000	0,1	8	**08000**
9,525	32	48	85	9,525	0,1	8	**09525**
10,000	32	49	85	10,000	0,1	8	**10000**
12,000	32	53	95	12,000	0,1	8	**12000**
12,700	32	54	95	12,700	0,1	8	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 329

MonsterMill – FRP right-hand helix

The specialist for machining fibre-reinforced plastics

- ▲ optimal removal of CFK dust
- ▲ right-hand cutting
- ▲ slightly right-fluted, pushing cut
- ▲ Four end cutting edges / two central cutting edges

FRP

λ_s=7°
γ_s=0°



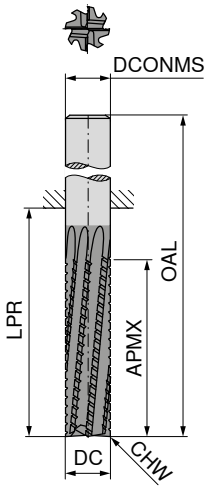

NEW

DIAMOND

Factory standard

52 597 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6,000	25	35	70	6,000	0,1	8	**06000**
6,350	25	35	70	6,350	0,1	8	**06350**
8,000	30	40	80	8,000	0,1	8	**08000**
9,525	32	44	85	9,525	0,1	8	**09525**
10,000	32	45	85	10,000	0,1	8	**10000**
12,000	32	49	95	12,000	0,1	8	**12000**
12,700	32	49	95	12,700	0,1	8	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 329

CircularLine – End milling cutter

The specialist for trochoidal machining

- ▲ Chip breaker 0.9 x DC
- ▲ 53 585 ... Cutting depth: 2 x DC
- ▲ 53 587 ... Cutting depth: 3 x DC

CCR UNI | λ_s 30° 31° | γ_s = 8° | HPC



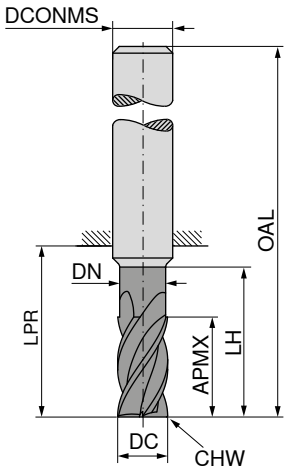

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 585 ...	53 587 ...
mm	mm	mm	mm	mm	mm	mm	mm			
6	13	5,8	19	21	57	6	0,2	6	060	
6	19	5,8	25	27	63	6	0,2	6		060
8	21	7,7	25	27	63	8	0,2	6	080	
8	25	7,7	33	35	71	8	0,2	6		080
10	22	9,7	30	32	72	10	0,2	6	100	
10	31	9,7	41	43	83	10	0,2	6		100
12	26	11,6	36	38	83	12	0,2	6	120	
12	37	11,6	47	49	94	12	0,2	6		120
14	26	13,6	36	38	83	14	0,2	6	14000	
14	43	13,6	55	59	104	14	0,2	6		14000
16	36	15,5	42	44	92	16	0,2	6	160	
16	49	15,5	61	63	111	16	0,2	6		160
18	36	17,5	42	44	92	18	0,2	6	18000	
18	55	17,5	69	73	121	18	0,2	6		18000
20	41	19,5	52	54	104	20	0,2	6	200	
20	61	19,5	75	77	127	20	0,2	6		200
P									●	●
M									○	○
K									●	●
N										
S									○	○
H										
O										

→ v_c/f_z Page 366+367

CircularLine – End milling cutter

The specialist for trochoidal machining

▲ Chip breaker 0,9 x DC
▲ Cutting depth: 4 x DC

CCR UNI | λ_s=35° α_s=36° γ_s= 8° | HPC



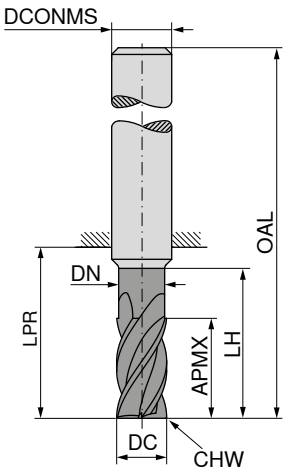

DPX72S

DRAGONSKIN

Factory standard

53 589 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	
6	25	5,8	29	31	67	6	0,2	5	**060**
8	33	7,7	38	40	76	8	0,2	5	**080**
10	41	9,7	47	49	89	10	0,2	5	**100**
12	49	11,6	55	57	102	12	0,2	5	**120**
14	57	13,6	64	68	113	14	0,2	5	**14000**
16	65	15,5	73	75	123	16	0,2	5	**160**
18	73	17,5	82	86	134	18	0,2	5	**18000**
20	82	19,5	91	93	143	20	0,2	5	**200**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 2 x DC

CCR UNI | λ_s=30° γ_s= 8° | HPC



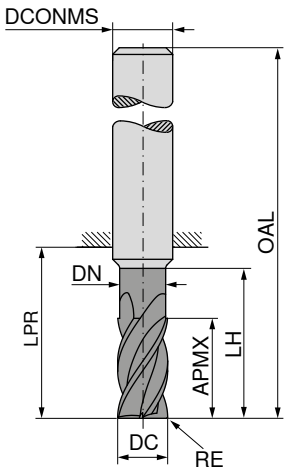

DPX72S

DRAGONSKIN

Factory standard

53 586 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
6	0,2	13	5,8	19	21	57	6	6	**06002**
6	1,0	13	5,8	19	21	57	6	6	**06010**
6	1,5	13	5,8	19	21	57	6	6	**06015**
8	0,2	21	7,7	25	27	63	8	6	**08002**
8	1,0	21	7,7	25	27	63	8	6	**08010**
8	1,5	21	7,7	25	27	63	8	6	**08015**
8	2,0	21	7,7	25	27	63	8	6	**08020**
10	0,2	22	9,7	30	32	72	10	6	**10002**
10	1,0	22	9,7	30	32	72	10	6	**10010**
10	1,5	22	9,7	30	32	72	10	6	**10015**
10	1,6	22	9,7	30	32	72	10	6	**10016**
10	2,0	22	9,7	30	32	72	10	6	**10020**
12	0,2	26	11,6	36	38	83	12	6	**12002**
12	1,0	26	11,6	36	38	83	12	6	**12010**
12	1,5	26	11,6	36	38	83	12	6	**12015**
12	1,6	26	11,6	36	38	83	12	6	**12016**
12	2,0	26	11,6	36	38	83	12	6	**12020**
12	3,0	26	11,6	36	38	83	12	6	**12030**
14	0,2	26	13,6	36	38	83	14	6	**14002**
14	1,0	26	13,6	36	38	83	14	6	**14010**
14	1,5	26	13,6	36	38	83	14	6	**14015**
14	1,6	26	13,6	36	38	83	14	6	**14016**
14	2,0	30	13,6	36	38	83	14	6	**14020**
14	3,0	26	13,6	36	38	83	14	6	**14030**
16	0,2	36	15,5	42	44	92	16	6	**16002**
16	1,0	36	15,5	42	44	92	16	6	**16010**
16	1,5	36	15,5	42	44	92	16	6	**16015**
16	1,6	36	15,5	42	44	92	16	6	**16016**
16	2,0	36	15,5	42	44	92	16	6	**16020**
16	3,0	36	15,5	42	44	92	16	6	**16030**
16	4,0	36	15,5	42	44	92	16	6	**16040**
18	0,2	36	17,5	42	44	92	18	6	**18002**
18	1,0	36	17,5	42	44	92	18	6	**18010**
18	1,5	36	17,5	42	44	92	18	6	**18015**
18	1,6	36	17,5	42	44	92	18	6	**18016**
18	2,0	36	17,5	42	44	92	18	6	**18020**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

14

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 2 x DC

CCR UNI | λ_s=30° γ_s= 31° 8° | HPC



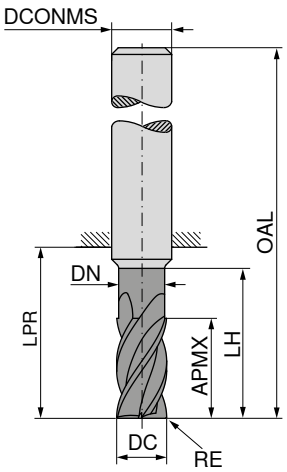

DPX72S

DRAGONSKIN

Factory standard

53 586 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
18	3,0	36	17,5	42	44	92	18	6	**18030**
18	4,0	36	17,5	42	44	92	18	6	**18040**
20	0,2	41	19,5	52	54	104	20	6	**20002**
20	1,0	41	19,5	52	54	104	20	6	**20010**
20	1,5	41	19,5	52	54	104	20	6	**20015**
20	1,6	41	19,5	52	54	104	20	6	**20016**
20	2,0	41	19,5	52	54	104	20	6	**20020**
20	3,0	41	19,5	52	54	104	20	6	**20030**
20	4,0	41	19,5	52	54	104	20	6	**20040**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR UNI | λ_s=30° γ_s= 8° | HPC



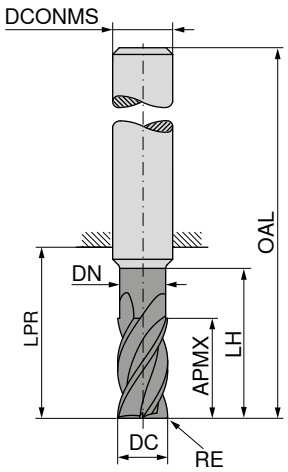

DPX72S

DRAGONSKIN

Factory standard

53 642 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
6	0,2	19	5,8	25	27	63	6	6	**06202**
6	1,0	19	5,8	25	27	63	6	6	**06210**
6	1,5	19	5,8	25	27	63	6	6	**06215**
8	0,2	25	7,7	33	35	71	8	6	**08202**
8	1,0	25	7,7	33	35	71	8	6	**08210**
8	1,5	25	7,7	33	35	71	8	6	**08215**
8	2,0	25	7,7	33	35	71	8	6	**08220**
10	0,2	31	9,7	41	43	83	10	6	**10202**
10	1,0	31	9,7	41	43	83	10	6	**10210**
10	1,5	31	9,7	41	43	83	10	6	**10215**
10	1,6	31	9,7	41	43	83	10	6	**10216**
10	2,0	31	9,7	41	43	83	10	6	**10220**
12	0,2	37	11,6	47	49	94	12	6	**12202**
12	1,0	37	11,6	47	49	94	12	6	**12210**
12	1,5	37	11,6	47	49	94	12	6	**12215**
12	1,6	37	11,6	47	49	94	12	6	**12216**
12	2,0	37	11,6	47	49	94	12	6	**12220**
12	3,0	37	11,6	47	49	94	12	6	**12230**
14	0,2	43	13,6	55	59	104	14	6	**14202**
14	1,0	43	13,6	55	59	104	14	6	**14210**
14	1,5	43	13,6	55	59	104	14	6	**14215**
14	1,6	43	13,6	55	59	104	14	6	**14216**
14	2,0	43	13,6	55	59	104	14	6	**14220**
14	3,0	43	13,6	55	59	104	14	6	**14230**
16	0,2	49	15,5	61	63	111	16	6	**16202**
16	1,0	49	15,5	61	63	111	16	6	**16210**
16	1,5	49	15,5	61	63	111	16	6	**16215**
16	1,6	49	15,5	61	63	111	16	6	**16216**
16	2,0	49	15,5	61	63	111	16	6	**16220**
16	3,0	49	15,5	61	63	111	16	6	**16230**
16	4,0	49	15,5	61	63	111	16	6	**16240**
18	0,2	55	17,5	69	73	121	18	6	**18202**
18	1,0	55	17,5	69	73	121	18	6	**18210**
18	1,5	55	17,5	69	73	121	18	6	**18215**
18	1,6	55	17,5	69	73	121	18	6	**18216**
18	2,0	55	17,5	69	73	121	18	6	**18220**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

14

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR UNI | λ_s=30° γ_s= 31° 8° | HPC



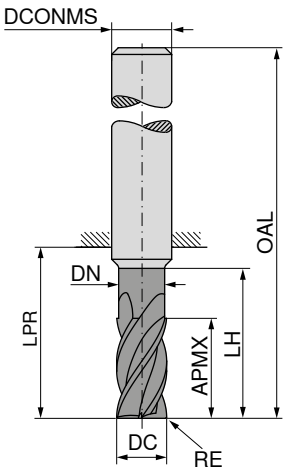

DPX72S

DRAGONSKIN

Factory standard

53 642 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
18	3,0	55	17,5	69	73	121	18	6	**18230**
18	4,0	55	17,5	69	73	121	18	6	**18240**
20	0,2	61	19,5	75	77	127	20	6	**20202**
20	1,0	61	19,5	75	77	127	20	6	**20210**
20	1,5	61	19,5	75	77	127	20	6	**20215**
20	1,6	61	19,5	75	77	127	20	6	**20216**
20	2,0	61	19,5	75	77	127	20	6	**20220**
20	3,0	61	19,5	75	77	127	20	6	**20230**
20	4,0	61	19,5	75	77	127	20	6	**20240**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 4 x DC

CCR UNI | λ_s=35° γ_s= 36° 9° | HPC



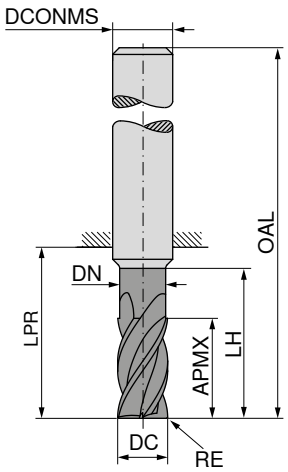

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0.05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6	0,2	25	5,8	29	31	67	6	5	**06002**
6	1,0	25	5,8	29	31	67	6	5	**06010**
6	1,5	25	5,8	29	31	67	6	5	**06015**
8	0,2	33	7,7	38	40	76	8	5	**08002**
8	1,0	33	7,7	38	40	76	8	5	**08010**
8	1,5	33	7,7	38	40	76	8	5	**08015**
8	2,0	33	7,7	38	40	76	8	5	**08020**
10	0,2	41	9,7	47	49	89	10	5	**10002**
10	1,0	41	9,7	47	49	89	10	5	**10010**
10	1,5	41	9,7	47	49	89	10	5	**10015**
10	1,6	41	9,7	47	49	89	10	5	**10016**
10	2,0	41	9,7	47	49	89	10	5	**10020**
12	0,2	49	11,6	55	57	102	12	5	**12002**
12	1,0	49	11,6	55	57	102	12	5	**12010**
12	1,5	49	11,6	55	57	102	12	5	**12015**
12	1,6	49	11,6	55	57	102	12	5	**12016**
12	2,0	49	11,6	55	57	102	12	5	**12020**
12	3,0	49	11,6	55	57	102	12	5	**12030**
14	0,2	57	13,6	64	68	113	14	5	**14002**
14	1,0	57	13,6	64	68	113	14	5	**14010**
14	1,5	57	13,6	64	68	113	14	5	**14015**
14	1,6	57	13,6	64	68	113	14	5	**14016**
14	2,0	57	13,6	64	68	113	14	5	**14020**
14	3,0	57	13,6	64	68	113	14	5	**14030**
16	0,2	65	15,5	73	75	123	16	5	**16002**
16	1,0	65	15,5	73	75	123	16	5	**16010**
16	1,5	65	15,5	73	75	123	16	5	**16015**
16	1,6	65	15,5	73	75	123	16	5	**16016**
16	2,0	65	15,5	73	75	123	16	5	**16020**
16	3,0	65	15,5	73	75	123	16	5	**16030**
16	4,0	65	15,5	73	75	123	16	5	**16040**
18	0,2	73	17,5	82	86	134	18	5	**18002**
18	1,0	73	17,5	82	86	134	18	5	**18010**
18	1,5	73	17,5	82	86	134	18	5	**18015**
18	1,6	73	17,5	82	86	134	18	5	**18016**
18	2,0	73	17,5	82	86	134	18	5	**18020**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 4 x DC

CCR UNI | λ_s=35° γ_s= 36° 9° | HPC



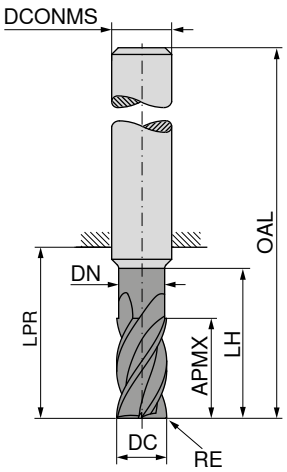

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0.05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
18	3,0	73	17,5	82	86	134	18	5	**18030**
18	4,0	73	17,5	82	86	134	18	5	**18040**
20	0,2	82	19,5	91	93	143	20	5	**20002**
20	1,0	82	19,5	91	93	143	20	5	**20010**
20	1,5	82	19,5	91	93	143	20	5	**20015**
20	1,6	82	19,5	91	93	143	20	5	**20016**
20	2,0	82	19,5	91	93	143	20	5	**20020**
20	3,0	82	19,5	91	93	143	20	5	**20030**
20	4,0	82	19,5	91	93	143	20	5	**20040**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 5 x DC

CCR UNI | λ_s=35° α_s=36° γ_s= 9° | HPC



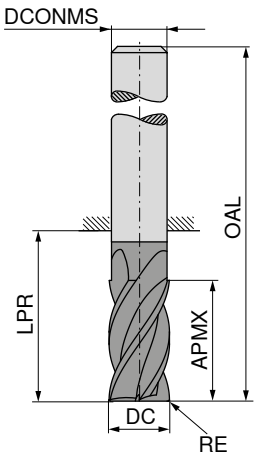

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6,0	0,2	31	39	75	6	5	**06402**
6,0	1,0	31	39	75	6	5	**06410**
6,0	1,5	31	39	75	6	5	**06415**
8,0	0,2	41	49	85	8	5	**08402**
8,0	1,0	41	49	85	8	5	**08410**
8,0	1,5	41	49	85	8	5	**08415**
8,0	2,0	41	49	85	8	5	**08420**
10,0	0,2	51	60	100	10	5	**10402**
10,0	1,0	51	60	100	10	5	**10410**
10,0	1,5	51	60	100	10	5	**10415**
10,0	1,6	51	60	100	10	5	**10416**
10,0	2,0	51	60	100	10	5	**10420**
12,0	0,2	61	70	115	12	5	**12402**
12,0	1,0	61	70	115	12	5	**12410**
12,0	1,5	61	70	115	12	5	**12415**
12,0	1,6	61	70	115	12	5	**12416**
12,0	2,0	61	70	115	12	5	**12420**
12,0	3,0	61	70	115	12	5	**12430**
14,0	0,2	71	81	126	14	5	**14402**
14,0	1,0	71	81	126	14	5	**14410**
14,0	1,5	71	81	126	14	5	**14415**
14,0	1,6	71	81	126	14	5	**14416**
14,0	2,0	71	81	126	14	5	**14420**
14,0	3,0	71	81	126	14	5	**14430**
16,0	0,2	81	92	140	16	5	**16402**
16,0	1,0	81	92	140	16	5	**16410**
16,0	1,5	81	92	140	16	5	**16415**
16,0	1,6	81	92	140	16	5	**16416**
16,0	2,0	81	92	140	16	5	**16420**
16,0	3,0	81	92	140	16	5	**16430**
16,0	4,0	81	92	140	16	5	**16440**
18,0	0,2	91	102	150	18	5	**18402**
18,0	1,0	91	102	150	18	5	**18410**
18,0	1,5	91	102	150	18	5	**18415**
18,0	1,6	91	102	150	18	5	**18416**
18,0	2,0	91	102	150	18	5	**18420**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 5 x DC

CCR UNI | λ_s 35° γ_s 36° 9° | HPC

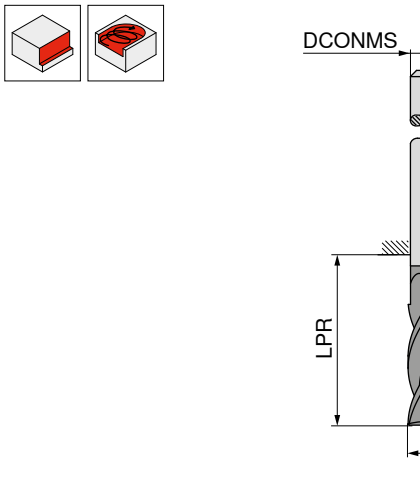

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
18,0	3,0	91	102	150	18	5	**18430**
18,0	4,0	91	102	150	18	5	**18440**
20,0	0,2	102	113	163	20	5	**20402**
20,0	1,0	102	113	163	20	5	**20410**
20,0	1,5	102	113	163	20	5	**20415**
20,0	1,6	102	113	163	20	5	**20416**
20,0	2,0	102	113	163	20	5	**20420**
20,0	3,0	102	113	163	20	5	**20430**
20,0	4,0	102	113	163	20	5	**20440**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR VA | λ_s=30° γ_s= 31° 8° | HPC



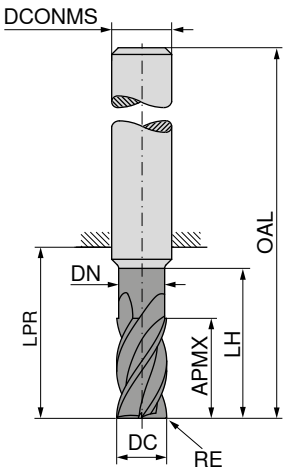

NEW

DPX22S

DRAGONSKIN

Factory standard

53 643 ...

DC $_{e8}$ mm	RE $_{\pm 0.05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
6,0	0,2	19	5,8	25	27	63	6	6	**06202**
6,0	1,0	19	5,8	25	27	63	6	6	**06210**
6,0	1,5	19	5,8	25	27	63	6	6	**06215**
8,0	0,2	25	7,7	33	35	71	8	6	**08202**
8,0	1,0	25	7,7	33	35	71	8	6	**08210**
8,0	1,5	25	7,7	33	35	71	8	6	**08215**
8,0	2,0	25	7,7	33	35	71	8	6	**08220**
10,0	0,2	31	9,7	41	43	83	10	6	**10202**
10,0	1,0	31	9,7	41	43	83	10	6	**10210**
10,0	1,5	31	9,7	41	43	83	10	6	**10215**
10,0	2,0	31	9,7	41	43	83	10	6	**10220**
12,0	0,2	37	11,6	47	49	94	12	6	**12202**
12,0	1,0	37	11,6	47	49	94	12	6	**12210**
12,0	1,5	37	11,6	47	49	94	12	6	**12215**
12,0	2,0	37	11,6	47	49	94	12	6	**12220**
12,0	3,0	37	11,6	47	49	94	12	6	**12230**
14,0	0,2	43	13,6	55	59	104	14	6	**14202**
14,0	1,0	43	13,6	55	59	104	14	6	**14210**
14,0	1,5	43	13,6	55	59	104	14	6	**14215**
14,0	2,0	43	13,6	55	59	104	14	6	**14220**
14,0	3,0	43	13,6	55	59	104	14	6	**14230**
16,0	0,2	49	15,5	61	63	111	16	6	**16202**
16,0	1,0	49	15,5	61	63	111	16	6	**16210**
16,0	1,5	49	15,5	61	63	111	16	6	**16215**
16,0	2,0	49	15,5	61	63	111	16	6	**16220**
16,0	3,0	49	15,5	61	63	111	16	6	**16230**
16,0	4,0	49	15,5	61	63	111	16	6	**16240**
18,0	0,2	55	17,5	69	73	121	18	6	**18202**
18,0	1,0	55	17,5	69	73	121	18	6	**18210**
18,0	1,5	55	17,5	69	73	121	18	6	**18215**
18,0	2,0	55	17,5	69	73	121	18	6	**18220**
18,0	3,0	55	17,5	69	73	121	18	6	**18230**
18,0	4,0	55	17,5	69	73	121	18	6	**18240**
20,0	0,2	61	19,5	75	77	127	20	6	**20202**
20,0	1,0	61	19,5	75	77	127	20	6	**20210**
20,0	1,5	61	19,5	75	77	127	20	6	**20215**
20,0	2,0	61	19,5	75	77	127	20	6	**20220**
20,0	3,0	61	19,5	75	77	127	20	6	**20230**
20,0	4,0	61	19,5	75	77	127	20	6	**20040**

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c/f_z Page 370+371

14

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 4 x DC

CCR VA | λ_s 35° | γ_s 36° | γ_s 9° | HPC

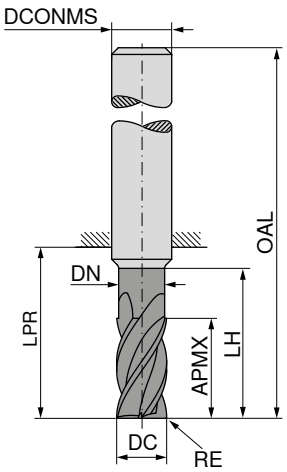

NEW

DPX22S

DRAGONSKIN

Factory standard

53 644 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6,0	0,2	25	5,8	29	31	67	6	5	**06002**
6,0	1,0	25	5,8	29	31	67	6	5	**06010**
6,0	1,5	25	5,8	29	31	67	6	5	**06015**
8,0	0,2	33	7,7	38	40	76	8	5	**08002**
8,0	1,0	33	7,7	38	40	76	8	5	**08010**
8,0	1,5	33	7,7	38	40	76	8	5	**08015**
8,0	2,0	33	7,7	38	40	76	8	5	**08020**
10,0	0,2	41	9,7	47	49	89	10	5	**10002**
10,0	1,0	41	9,7	47	49	89	10	5	**10010**
10,0	1,5	41	9,7	47	49	89	10	5	**10015**
10,0	2,0	41	9,7	47	49	89	10	5	**10020**
12,0	0,2	49	11,6	55	57	102	12	5	**12002**
12,0	1,0	49	11,6	55	57	102	12	5	**12010**
12,0	1,5	49	11,6	55	57	102	12	5	**12015**
12,0	2,0	49	11,6	55	57	102	12	5	**12020**
12,0	3,0	49	11,6	55	57	102	12	5	**12030**
14,0	0,2	57	13,6	64	68	113	14	5	**14002**
14,0	1,0	57	13,6	64	68	113	14	5	**14010**
14,0	1,5	57	13,6	64	68	113	14	5	**14015**
14,0	2,0	57	13,6	64	68	113	14	5	**14020**
14,0	3,0	57	13,6	64	68	113	14	5	**14030**
16,0	0,2	65	15,5	73	75	123	16	5	**16002**
16,0	1,0	65	15,5	73	75	123	16	5	**16010**
16,0	1,5	65	15,5	73	75	123	16	5	**16015**
16,0	2,0	65	15,5	73	75	123	16	5	**16020**
16,0	3,0	65	15,5	73	75	123	16	5	**16030**
16,0	4,0	65	15,5	73	75	123	16	5	**16040**
18,0	0,2	73	17,5	82	86	134	18	5	**18002**
18,0	1,0	73	17,5	82	86	134	18	5	**18010**
18,0	1,5	73	17,5	82	86	134	18	5	**18015**
18,0	2,0	73	17,5	82	86	134	18	5	**18020**
18,0	3,0	73	17,5	82	86	134	18	5	**18030**
18,0	4,0	73	17,5	82	86	134	18	5	**18040**
20,0	0,2	82	19,5	91	93	143	20	5	**20002**
20,0	1,0	82	19,5	91	93	143	20	5	**20010**
20,0	1,5	82	19,5	91	93	143	20	5	**20015**
20,0	2,0	82	19,5	91	93	143	20	5	**20020**
20,0	3,0	82	19,5	91	93	143	20	5	**20030**
20,0	4,0	82	19,5	91	93	143	20	5	**20040**

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c/f_z Page 372+373

CircularLine – End milling cutter

The specialist for trochoidal machining

- ▲ Chip breaker 1.8 x DC
- ▲ 53 590 ... Cutting depth: 3 x DC
- ▲ 53 591 ... Cutting depth: 4 x DC

CCR AL | λ_s=45° γ_s= 8°



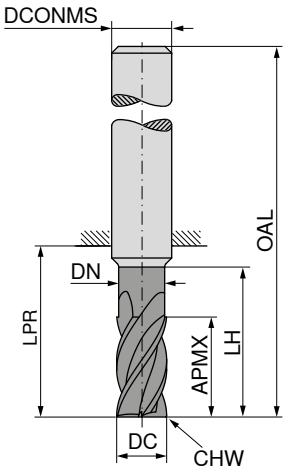

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	53 590 ...	53 591 ...
6	19	5,8	24	30	66	6	0,2	4	**060**	
6	25	5,8	30	35	71	6	0,2	4		**060**
8	25	7,7	32	37	73	8	0,2	4	**080**	
8	33	7,7	40	44	80	8	0,2	4		**080**
10	31	9,7	40	49	89	10	0,2	4	**100**	
10	41	9,7	50	55	95	10	0,2	4		**100**
12	37	11,6	48	56	101	12	0,2	4	**120**	
12	49	11,6	60	64	109	12	0,2	4		**120**
14	43	13,0	56	60	105	14	0,2	4	**14000**	
14	57	13,0	70	74	119	14	0,2	4		**14000**
16	49	15,5	64	72	120	16	0,2	4	**160**	
16	65	15,5	80	84	132	16	0,2	4		**160**
18	56	17,0	72	76	124	18	0,2	4	**18000**	
18	74	17,0	90	94	142	18	0,2	4		**18000**
20	62	19,5	80	84	134	20	0,2	4	**200**	
20	82	19,5	100	104	154	20	0,2	4		**200**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 3 x DC

CCR AL | λ_s=45° γ_s= 8°



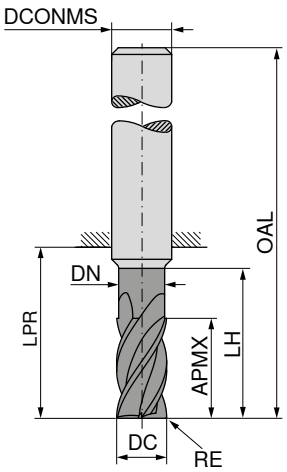

DLC
DRAGONSKIN

Factory standard

53 594 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6	0,2	19	5,8	24	30	66	6	4	**06002**
6	1,0	19	5,8	24	30	66	6	4	**06010**
6	1,5	19	5,8	24	30	66	6	4	**06015**
8	0,2	25	7,7	32	37	73	8	4	**08002**
8	1,0	25	7,7	32	37	73	8	4	**08010**
8	1,5	25	7,7	32	37	73	8	4	**08015**
8	2,0	25	7,7	32	37	73	8	4	**08020**
10	0,2	31	9,7	40	49	89	10	4	**10002**
10	1,0	31	9,7	40	49	89	10	4	**10010**
10	1,5	31	9,7	40	49	89	10	4	**10015**
10	1,6	31	9,7	40	49	89	10	4	**10016**
10	2,0	31	9,7	40	49	89	10	4	**10020**
12	0,2	37	11,6	48	56	101	12	4	**12002**
12	1,0	37	11,6	48	56	101	12	4	**12010**
12	1,5	37	11,6	48	56	101	12	4	**12015**
12	1,6	37	11,6	48	56	101	12	4	**12016**
12	2,0	37	11,6	48	56	101	12	4	**12020**
12	3,0	37	11,6	48	56	101	12	4	**12030**
14	0,2	43	13,0	56	60	105	14	4	**14002**
14	1,0	43	13,0	56	60	105	14	4	**14010**
14	1,5	43	13,0	56	60	105	14	4	**14015**
14	1,6	43	13,0	56	60	105	14	4	**14016**
14	2,0	43	13,0	56	60	105	14	4	**14020**
14	3,0	43	13,0	56	60	105	14	4	**14030**
16	0,2	49	15,5	64	72	120	16	4	**16002**
16	1,0	49	15,5	64	72	120	16	4	**16010**
16	1,5	49	15,5	64	72	120	16	4	**16015**
16	1,6	49	15,5	64	72	120	16	4	**16016**
16	2,0	49	15,5	64	72	120	16	4	**16020**
16	3,0	49	15,5	64	72	120	16	4	**16030**
16	4,0	49	15,5	64	72	120	16	4	**16040**
18	0,2	56	17,0	72	76	124	18	4	**18002**
18	1,0	56	17,0	72	76	124	18	4	**18010**
18	1,5	56	17,0	72	76	124	18	4	**18015**
18	1,6	56	17,0	72	76	124	18	4	**18016**
18	2,0	56	17,0	72	76	124	18	4	**18020**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 3 x DC

CCR AL | λ_s=45° γ_s= 8°



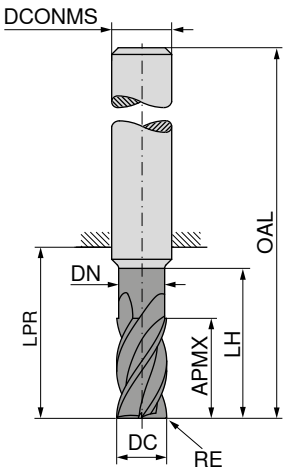

DLC

DRAGONSKIN

Factory standard

53 594 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
18	3,0	56	17,0	72	76	124	18	4	**18030**
18	4,0	56	17,0	72	76	124	18	4	**18040**
20	0,2	62	19,5	80	84	134	20	4	**20002**
20	1,0	62	19,5	80	84	134	20	4	**20010**
20	1,5	62	19,5	80	84	134	20	4	**20015**
20	1,6	62	19,5	80	84	134	20	4	**20016**
20	2,0	62	19,5	80	84	134	20	4	**20020**
20	3,0	62	19,5	80	84	134	20	4	**20030**
20	4,0	62	19,5	80	84	134	20	4	**20040**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 4 x DC

CCR AL | λ_s=45° γ_s= 8°



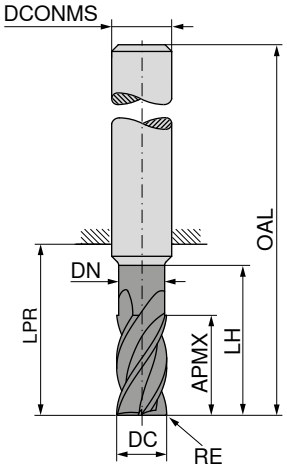

DLC

DRAGONSKIN

Factory standard

53 595 ...

DC $_{e8}$ mm	RE $_{\pm 0.05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
6	0,2	25	5,8	30	35	71	6	4	**06002**
6	1,0	25	5,8	30	35	71	6	4	**06010**
6	1,5	25	5,8	30	35	71	6	4	**06015**
8	0,2	33	7,7	40	44	80	8	4	**08002**
8	1,0	33	7,7	40	44	80	8	4	**08010**
8	1,5	33	7,7	40	44	80	8	4	**08015**
8	2,0	33	7,7	40	44	80	8	4	**08020**
10	0,2	41	9,7	50	55	95	10	4	**10002**
10	1,0	41	9,7	50	55	95	10	4	**10010**
10	1,5	41	9,7	50	55	95	10	4	**10015**
10	1,6	41	9,7	50	55	95	10	4	**10016**
10	2,0	41	9,7	50	55	95	10	4	**10020**
12	0,2	49	11,6	60	64	109	12	4	**12002**
12	1,0	49	11,6	60	64	109	12	4	**12010**
12	1,5	49	11,6	60	64	109	12	4	**12015**
12	1,6	49	11,6	60	64	109	12	4	**12016**
12	2,0	49	11,6	60	64	109	12	4	**12020**
12	3,0	49	11,6	60	64	109	12	4	**12030**
14	0,2	57	13,0	70	74	119	14	4	**14002**
14	1,0	57	13,0	70	74	119	14	4	**14010**
14	1,5	57	13,0	70	74	119	14	4	**14015**
14	1,6	57	13,0	70	74	119	14	4	**14016**
14	2,0	57	13,0	70	74	119	14	4	**14020**
14	3,0	57	13,0	70	74	119	14	4	**14030**
16	0,2	65	15,5	80	84	132	16	4	**16002**
16	1,0	65	15,5	80	84	132	16	4	**16010**
16	1,5	65	15,5	80	84	132	16	4	**16015**
16	1,6	65	15,5	80	84	132	16	4	**16016**
16	2,0	65	15,5	80	84	132	16	4	**16020**
16	3,0	65	15,5	80	84	132	16	4	**16030**
16	4,0	65	15,5	80	84	132	16	4	**16040**
18	0,2	74	17,0	90	94	142	18	4	**18002**
18	1,0	74	17,0	90	94	142	18	4	**18010**
18	1,5	74	17,0	90	94	142	18	4	**18015**
18	1,6	74	17,0	90	94	142	18	4	**18016**
18	2,0	74	17,0	90	94	142	18	4	**18020**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 4 x DC

CCR AL | λ_s=45° γ_s= 8°



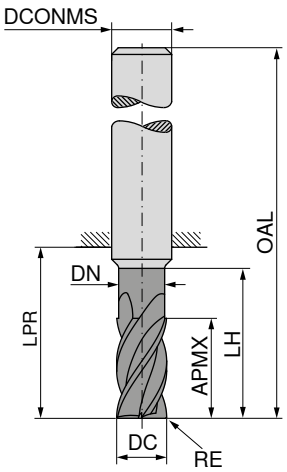

DLC
DRAGONSKIN

Factory standard

53 595 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
18	3,0	74	17,0	90	94	142	18	4	**18030**
18	4,0	74	17,0	90	94	142	18	4	**18040**
20	0,2	82	19,5	100	104	154	20	4	**20002**
20	1,0	82	19,5	100	104	154	20	4	**20010**
20	1,5	82	19,5	100	104	154	20	4	**20015**
20	1,6	82	19,5	100	104	154	20	4	**20016**
20	2,0	82	19,5	100	104	154	20	4	**20020**
20	3,0	82	19,5	100	104	154	20	4	**20030**
20	4,0	82	19,5	100	104	154	20	4	**20040**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 5 x DC

CCR AL | λ_s=45° γ_s= 8°



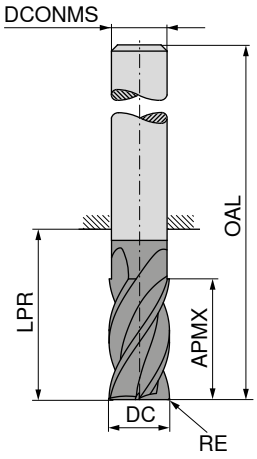

NEW

DLC

DRAGONSKIN

Factory standard

53 641 ...

DC h8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6	0,2	31	40	76	6	4	**06002**
6	1,0	31	40	76	6	4	**06010**
6	1,5	31	40	76	6	4	**06015**
8	0,2	41	50	86	8	4	**08002**
8	1,0	41	50	86	8	4	**08010**
8	1,5	41	50	86	8	4	**08015**
8	2,0	41	50	86	8	4	**08020**
10	0,2	51	61	101	10	4	**10002**
10	1,0	51	61	101	10	4	**10010**
10	1,5	51	61	101	10	4	**10015**
10	2,0	51	61	101	10	4	**10020**
12	0,2	61	71	116	12	4	**12002**
12	1,0	61	71	116	12	4	**12010**
12	1,5	61	71	116	12	4	**12015**
12	2,0	61	71	116	12	4	**12020**
14	0,2	71	82	127	14	4	**14002**
14	1,0	71	82	127	14	4	**14010**
14	1,5	71	82	127	14	4	**14015**
14	2,0	71	82	127	14	4	**14020**
16	0,2	81	93	141	16	4	**16002**
16	1,0	81	93	141	16	4	**16010**
16	1,5	81	93	141	16	4	**16015**
16	2,0	81	93	141	16	4	**16020**
18	0,2	91	103	151	18	4	**18002**
18	1,0	91	103	151	18	4	**18010**
18	1,5	91	103	151	18	4	**18015**
18	2,0	91	103	151	18	4	**18020**
20	0,2	102	114	164	20	4	**20002**
20	1,0	102	114	164	20	4	**20010**
20	1,5	102	114	164	20	4	**20015**
20	2,0	102	114	164	20	4	**20020**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

- ▲ Chip breaker 0.9 x DC
- ▲ Long cutting depth version: 3 x DC
- ▲ Extra-long cutting depth version: 4 x DC

CCR Ti | λ_s=40° γ_s=10° | HPC



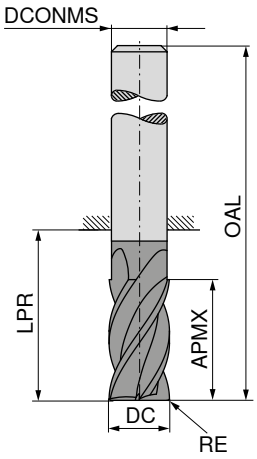

DC e8 mm	RE ±0,01 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 510 ...	52 510 ...
6	0,1	18	29	65	6	5	06000	
6	0,1	24	31	67	6	5		06100
8	0,2	24	34	70	8	5	08000	
8	0,2	32	44	80	8	5		08100
10	0,2	30	40	80	10	5	10000	
10	0,2	40	50	90	10	5		10100
12	0,2	36	50	95	12	5	12000	
12	0,2	48	55	100	12	5		12100
16	0,2	48	62	110	16	5	16000	
16	0,3	64	72	120	16	5		16100
20	0,3	60	75	125	20	5	20000	
20	0,3	80	90	140	20	5		20100

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 376+377

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR H | λ_s=50° γ_s=–6° | 45–70 HRC



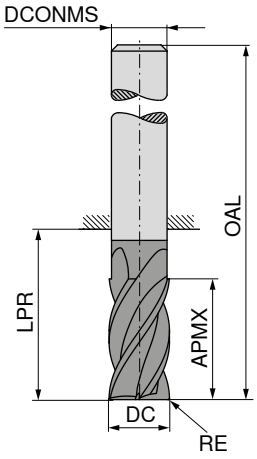

DPX62S

DRAGONSKIN

Factory standard

53 596 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
6	0,2	19	24	60	6	6	**06002**
6	1,0	19	24	60	6	6	**06010**
8	0,2	25	31	67	8	6	**08002**
8	1,0	25	31	67	8	6	**08010**
10	0,2	31	37	77	10	6	**10002**
10	1,0	31	37	77	10	6	**10010**
10	1,5	31	37	77	10	6	**10015**
12	0,2	37	43	88	12	6	**12002**
12	1,0	37	43	88	12	6	**12010**
12	1,5	37	43	88	12	6	**12015**
12	2,0	37	43	88	12	6	**12020**
12	3,0	37	43	88	12	6	**12030**
16	0,2	49	56	104	16	6	**16002**
16	1,0	49	56	104	16	6	**16010**
16	1,5	49	56	104	16	6	**16015**
16	2,0	49	56	104	16	6	**16020**
16	3,0	49	56	104	16	6	**16030**
20	0,2	61	68	118	20	6	**20002**
20	1,0	61	68	118	20	6	**20010**
20	1,5	61	68	118	20	6	**20015**
20	2,0	61	68	118	20	6	**20020**
20	3,0	61	68	118	20	6	**20030**

P	
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 378

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





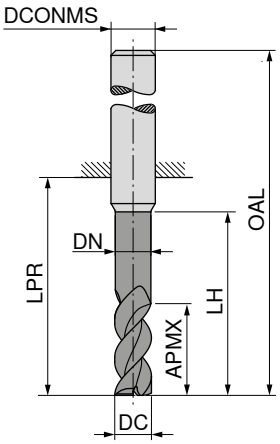

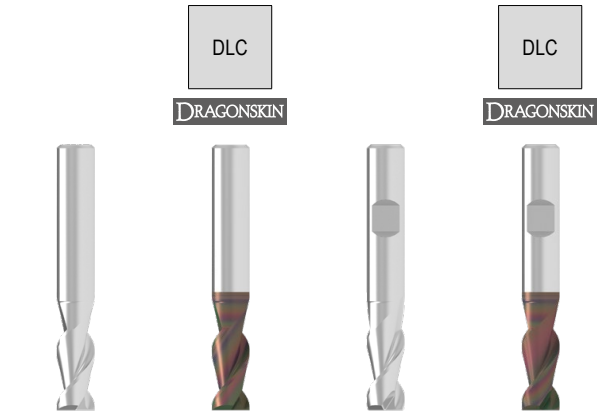

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 623 ...	53 625 ...	53 624 ...	53 626 ...
5,0	10,5	4,8	15	22	58	6	2	**05100**	**05100**	**05100**	**05100**
5,5	13,0	5,3	18	22	58	6	2	**05600**	**05600**	**05600**	**05600**
6,0	13,0	5,8	18	22	58	6	2	**06100**	**06100**	**06100**	**06100**
6,5	17,0	6,2	24	28	64	8	2	**06600**	**06600**	**06600**	**06600**
7,0	17,0	6,7	24	28	64	8	2	**07100**	**07100**	**07100**	**07100**
7,5	17,0	7,2	24	28	64	8	2	**07600**	**07600**	**07600**	**07600**
8,0	17,0	7,7	24	28	64	8	2	**08100**	**08100**	**08100**	**08100**
8,5	21,0	8,2	30	34	74	10	2	**08600**	**08600**	**08600**	**08600**
9,0	21,0	8,7	30	34	74	10	2	**09100**	**09100**	**09100**	**09100**
9,5	21,0	9,2	30	34	74	10	2	**09600**	**09600**	**09600**	**09600**
10,0	21,0	9,7	30	34	74	10	2	**10100**	**10100**	**10100**	**10100**
10,5	25,0	10,1	36	40	85	12	2	**10600**	**10600**	**10600**	**10600**
11,0	25,0	10,6	36	40	85	12	2	**11100**	**11100**	**11100**	**11100**
11,5	25,0	11,1	36	40	85	12	2	**11600**	**11600**	**11600**	**11600**
12,0	25,0	11,6	36	40	85	12	2	**12100**	**12100**	**12100**	**12100**
12,5	29,0	12,1	42	46	91	14	2			**12600**	**12600**
13,0	29,0	12,6	42	46	91	14	2			**13100**	**13100**
13,5	29,0	13,1	42	46	91	14	2			**13600**	**13600**
14,0	29,0	13,6	42	46	91	14	2			**14100**	**14100**
14,5	33,0	14,0	48	52	100	16	2			**14600**	**14600**
15,0	33,0	14,5	48	52	100	16	2			**15100**	**15100**
15,5	33,0	15,0	48	52	100	16	2			**15600**	**15600**
16,0	33,0	15,5	48	52	100	16	2			**16100**	**16100**
16,5	38,0	16,0	54	58	106	18	2			**16600**	**16600**
17,0	38,0	16,5	54	58	106	18	2			**17100**	**17100**
17,5	38,0	17,0	54	58	106	18	2			**17600**	**17600**
18,0	38,0	17,5	54	58	106	18	2			**18100**	**18100**
18,5	42,0	18,0	60	64	114	20	2			**18600**	**18600**
19,0	42,0	18,5	60	64	114	20	2			**19100**	**19100**
19,5	42,0	19,0	60	64	114	20	2			**19600**	**19600**
20,0	42,0	19,5	60	64	114	20	2			**20100**	**20100**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





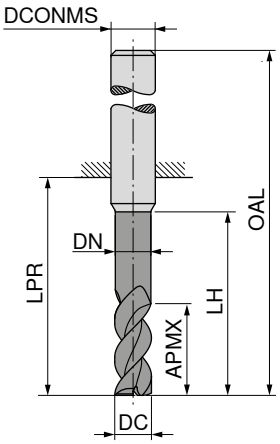

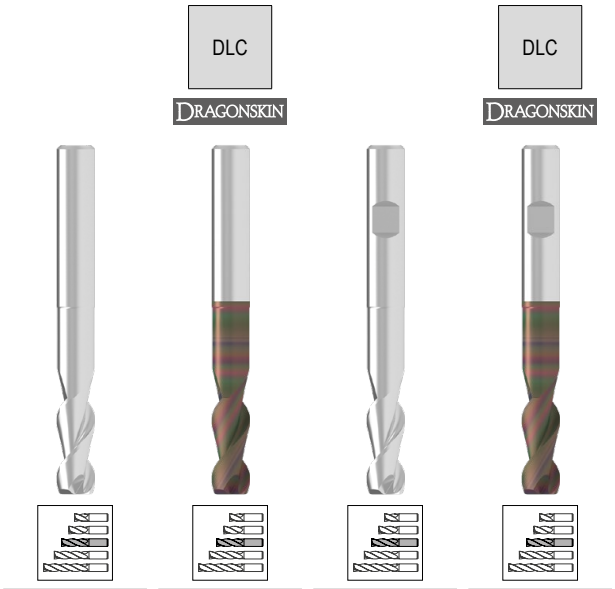

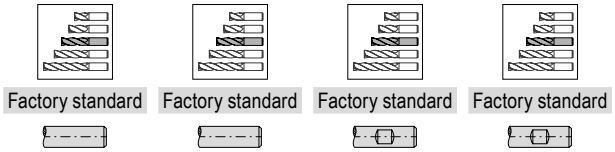

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 633 ...	53 635 ...	53 634 ...	53 636 ...
2,0	5,5	1,8	10,0	19	55	6	2	**02300**	**02300**	**02300**	**02300**
2,5	6,5	2,3	12,5	22	58	6	2	**02800**	**02800**	**02800**	**02800**
3,0	8,0	2,8	15,0	22	58	6	2	**03300**	**03300**	**03300**	**03300**
3,5	10,5	3,3	20,0	26	62	6	2	**03800**	**03800**	**03800**	**03800**
4,0	10,5	3,8	20,0	26	62	6	2	**04300**	**04300**	**04300**	**04300**
4,5	13,0	4,3	25,0	34	70	6	2	**04800**	**04800**	**04800**	**04800**
5,0	13,0	4,8	25,0	34	70	6	2	**05300**	**05300**	**05300**	**05300**
5,5	16,0	5,3	30,0	34	70	6	2	**05800**	**05800**	**05800**	**05800**
6,0	16,0	5,8	30,0	34	70	6	2	**06300**	**06300**	**06300**	**06300**
6,5	21,0	6,2	40,0	44	80	8	2	**06800**	**06800**	**06800**	**06800**
7,0	21,0	6,7	40,0	44	80	8	2	**07300**	**07300**	**07300**	**07300**
7,5	21,0	7,2	40,0	44	80	8	2	**07800**	**07800**	**07800**	**07800**
8,0	21,0	7,7	40,0	44	80	8	2	**08300**	**08300**	**08300**	**08300**
8,5	26,0	8,2	50,0	54	94	10	2	**08800**	**08800**	**08800**	**08800**
9,0	26,0	8,7	50,0	54	94	10	2	**09300**	**09300**	**09300**	**09300**
9,5	26,0	9,2	50,0	54	94	10	2	**09800**	**09800**	**09800**	**09800**
10,0	26,0	9,7	50,0	54	94	10	2	**10300**	**10300**	**10300**	**10300**
10,5	31,0	10,1	60,0	64	109	12	2	**10800**	**10800**	**10800**	**10800**
11,0	31,0	10,6	60,0	64	109	12	2	**11300**	**11300**	**11300**	**11300**
11,5	31,0	11,1	60,0	64	109	12	2	**11800**	**11800**	**11800**	**11800**
12,0	31,0	11,6	60,0	64	109	12	2	**12300**	**12300**	**12300**	**12300**
12,5	36,0	12,1	70,0	74	119	14	2			**12800**	**12800**
13,0	36,0	12,6	70,0	74	119	14	2			**13300**	**13300**
13,5	36,0	13,1	70,0	74	119	14	2			**13800**	**13800**
14,0	36,0	13,6	70,0	74	119	14	2			**14300**	**14300**
14,5	41,0	14,0	80,0	84	132	16	2			**14800**	**14800**
15,0	41,0	14,5	80,0	84	132	16	2			**15300**	**15300**
15,5	41,0	15,0	80,0	84	132	16	2			**15800**	**15800**
16,0	41,0	15,5	80,0	84	132	16	2			**16300**	**16300**
16,5	47,0	16,0	90,0	94	142	18	2			**16800**	**16800**
17,0	47,0	16,5	90,0	94	142	18	2			**17300**	**17300**
17,5	47,0	17,0	90,0	94	142	18	2			**17800**	**17800**
18,0	47,0	17,5	90,0	94	142	18	2			**18300**	**18300**
18,5	52,0	18,0	100,0	104	154	20	2			**18800**	**18800**
19,0	52,0	18,5	100,0	104	154	20	2			**19300**	**19300**
19,5	52,0	19,0	100,0	104	154	20	2			**19800**	**19800**
20,0	52,0	19,5	100,0	104	154	20	2			**20300**	**20300**
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes



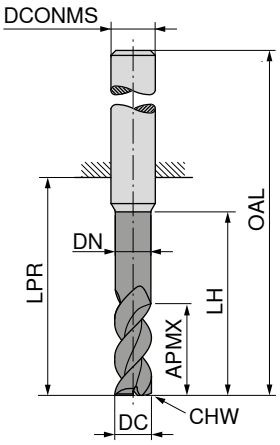

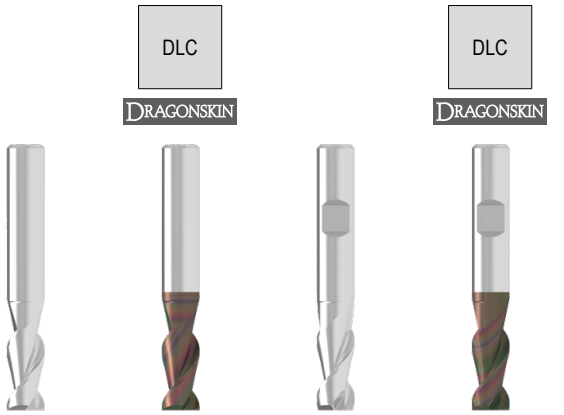

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 619 ...	53 621 ...	53 620 ...	53 622 ...
5,0	10,5	4,8	15	22	58	6	0,1	2	**05100**	**05100**	**05100**	**05100**
5,5	13,0	5,3	18	22	58	6	0,1	2	**05600**	**05600**	**05600**	**05600**
6,0	13,0	5,8	18	22	58	6	0,1	2	**06100**	**06100**	**06100**	**06100**
6,5	17,0	6,2	24	28	64	8	0,1	2	**06600**	**06600**	**06600**	**06600**
7,0	17,0	6,7	24	28	64	8	0,1	2	**07100**	**07100**	**07100**	**07100**
7,5	17,0	7,2	24	28	64	8	0,1	2	**07600**	**07600**	**07600**	**07600**
8,0	17,0	7,7	24	28	64	8	0,1	2	**08100**	**08100**	**08100**	**08100**
8,5	21,0	8,2	30	34	74	10	0,1	2	**08600**	**08600**	**08600**	**08600**
9,0	21,0	8,7	30	34	74	10	0,1	2	**09100**	**09100**	**09100**	**09100**
9,5	21,0	9,2	30	34	74	10	0,1	2	**09600**	**09600**	**09600**	**09600**
10,0	21,0	9,7	30	34	74	10	0,1	2	**10100**	**10100**	**10100**	**10100**
10,5	25,0	10,1	36	40	85	12	0,1	2	**10600**	**10600**	**10600**	**10600**
11,0	25,0	10,6	36	40	85	12	0,1	2	**11100**	**11100**	**11100**	**11100**
11,5	25,0	11,1	36	40	85	12	0,1	2	**11600**	**11600**	**11600**	**11600**
12,0	25,0	11,6	36	40	85	12	0,1	2	**12100**	**12100**	**12100**	**12100**
12,5	29,0	12,1	42	46	91	14	0,1	2			**12600**	**12600**
13,0	29,0	12,6	42	46	91	14	0,1	2			**13100**	**13100**
13,5	29,0	13,1	42	46	91	14	0,1	2			**13600**	**13600**
14,0	29,0	13,6	42	46	91	14	0,1	2			**14100**	**14100**
14,5	33,0	14,0	48	52	100	16	0,1	2			**14600**	**14600**
15,0	33,0	14,5	48	52	100	16	0,1	2			**15100**	**15100**
15,5	33,0	15,0	48	52	100	16	0,1	2			**15600**	**15600**
16,0	33,0	15,5	48	52	100	16	0,1	2			**16100**	**16100**
16,5	38,0	16,0	54	58	106	18	0,1	2			**16600**	**16600**
17,0	38,0	16,5	54	58	106	18	0,1	2			**17100**	**17100**
17,5	38,0	17,0	54	58	106	18	0,1	2			**17600**	**17600**
18,0	38,0	17,5	54	58	106	18	0,1	2			**18100**	**18100**
18,5	42,0	18,0	60	64	114	20	0,1	2			**18600**	**18600**
19,0	42,0	18,5	60	64	114	20	0,1	2			**19100**	**19100**
19,5	42,0	19,0	60	64	114	20	0,1	2			**19600**	**19600**
20,0	42,0	19,5	60	64	114	20	0,1	2			**20100**	**20100**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





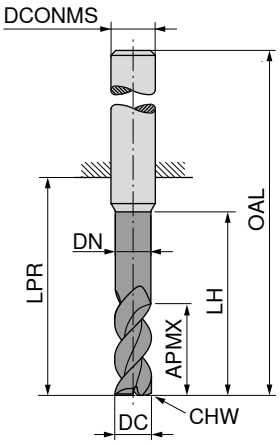

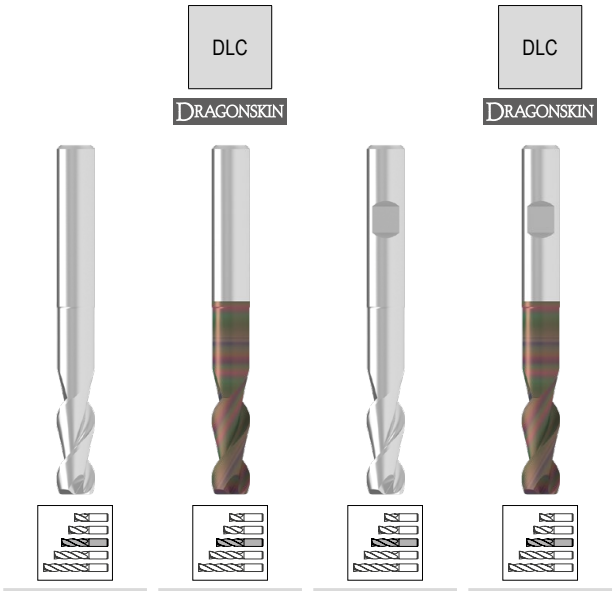

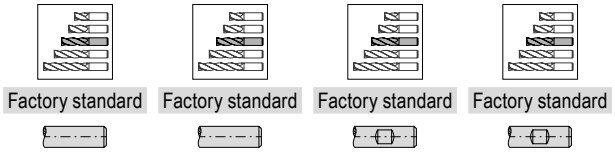

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 629 ...	53 631 ...	53 630 ...	53 632 ...
2,0	5,5	1,8	10,0	19	55	6	0,05	2	**02300**	**02300**	**02300**	**02300**
2,5	6,5	2,3	12,5	22	58	6	0,05	2	**02800**	**02800**	**02800**	**02800**
3,0	8,0	2,8	15,0	22	58	6	0,10	2	**03300**	**03300**	**03300**	**03300**
3,5	10,5	3,3	20,0	26	62	6	0,10	2	**03800**	**03800**	**03800**	**03800**
4,0	10,5	3,8	20,0	26	62	6	0,10	2	**04300**	**04300**	**04300**	**04300**
4,5	13,0	4,3	25,0	34	70	6	0,10	2	**04800**	**04800**	**04800**	**04800**
5,0	13,0	4,8	25,0	34	70	6	0,10	2	**05300**	**05300**	**05300**	**05300**
5,5	16,0	5,3	30,0	34	70	6	0,10	2	**05800**	**05800**	**05800**	**05800**
6,0	16,0	5,8	30,0	34	70	6	0,10	2	**06300**	**06300**	**06300**	**06300**
6,5	21,0	6,2	40,0	44	80	8	0,10	2	**06800**	**06800**	**06800**	**06800**
7,0	21,0	6,7	40,0	44	80	8	0,10	2	**07300**	**07300**	**07300**	**07300**
7,5	21,0	7,2	40,0	44	80	8	0,10	2	**07800**	**07800**	**07800**	**07800**
8,0	21,0	7,7	40,0	44	80	8	0,10	2	**08300**	**08300**	**08300**	**08300**
8,5	26,0	8,2	50,0	54	94	10	0,10	2	**08800**	**08800**	**08800**	**08800**
9,0	26,0	8,7	50,0	54	94	10	0,10	2	**09300**	**09300**	**09300**	**09300**
9,5	26,0	9,2	50,0	54	94	10	0,10	2	**09800**	**09800**	**09800**	**09800**
10,0	26,0	9,7	50,0	54	94	10	0,10	2	**10300**	**10300**	**10300**	**10300**
10,5	31,0	10,1	60,0	64	109	12	0,10	2	**10800**	**10800**	**10800**	**10800**
11,0	31,0	10,6	60,0	64	109	12	0,10	2	**11300**	**11300**	**11300**	**11300**
11,5	31,0	11,1	60,0	64	109	12	0,10	2	**11800**	**11800**	**11800**	**11800**
12,0	31,0	11,6	60,0	64	109	12	0,10	2	**12300**	**12300**	**12300**	**12300**
12,5	36,0	12,1	70,0	74	119	14	0,10	2			**12800**	**12800**
13,0	36,0	12,6	70,0	74	119	14	0,10	2			**13300**	**13300**
13,5	36,0	13,1	70,0	74	119	14	0,10	2			**13800**	**13800**
14,0	36,0	13,6	70,0	74	119	14	0,10	2			**14300**	**14300**
14,5	41,0	14,0	80,0	84	132	16	0,10	2			**14800**	**14800**
15,0	41,0	14,5	80,0	84	132	16	0,10	2			**15300**	**15300**
15,5	41,0	15,0	80,0	84	132	16	0,10	2			**15800**	**15800**
16,0	41,0	15,5	80,0	84	132	16	0,10	2			**16300**	**16300**
16,5	47,0	16,0	90,0	94	142	18	0,10	2			**16800**	**16800**
17,0	47,0	16,5	90,0	94	142	18	0,10	2			**17300**	**17300**
17,5	47,0	17,0	90,0	94	142	18	0,10	2			**17800**	**17800**
18,0	47,0	17,5	90,0	94	142	18	0,10	2			**18300**	**18300**
18,5	52,0	18,0	100,0	104	154	20	0,10	2			**18800**	**18800**
19,0	52,0	18,5	100,0	104	154	20	0,10	2			**19300**	**19300**
19,5	52,0	19,0	100,0	104	154	20	0,10	2			**19800**	**19800**
20,0	52,0	19,5	100,0	104	154	20	0,10	2			**20300**	**20300**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals



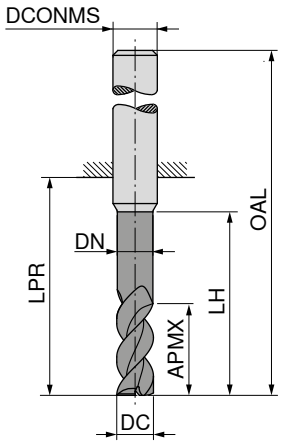

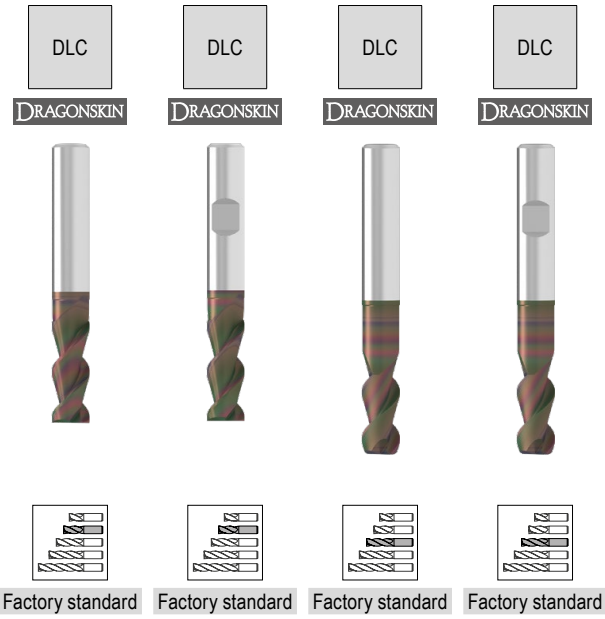

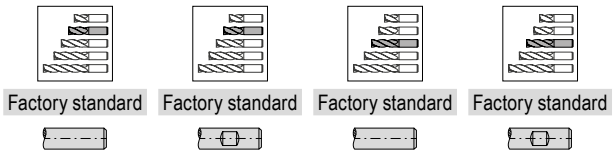

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	53 627 ...		53 628 ...		53 637 ...		53 638 ...	
mm	mm	mm	mm	mm	mm	mm									
2,0	5,5	1,8	10,0	19	55	6	2						02300		02300
2,5	6,5	2,3	12,5	22	58	6	2						02800		02800
3,0	8,0	2,8	15,0	22	58	6	2						03300		03300
3,5	10,5	3,3	20,0	26	62	6	2						03800		03800
4,0	10,5	3,8	20,0	26	62	6	2						04300		04300
4,5	13,0	4,3	25,0	34	70	6	2						04800		04800
5,0	10,5	4,8	15,0	22	58	6	2	05100		05100					
5,0	13,0	4,8	25,0	34	70	6	2						05300		05300
5,5	13,0	5,3	18,0	22	58	6	2	05600		05600					
5,5	16,0	5,3	30,0	34	70	6	2						05800		05800
6,0	13,0	5,8	18,0	22	58	6	2	06100		06100					
6,0	16,0	5,8	30,0	34	70	6	2						06300		06300
6,5	17,0	6,2	24,0	28	64	8	2	06600		06600					
6,5	21,0	6,2	40,0	44	80	8	2						06800		06800
7,0	17,0	6,7	24,0	28	64	8	2	07100		07100					
7,0	21,0	6,7	40,0	44	80	8	2						07300		07300
7,5	17,0	7,2	24,0	28	64	8	2	07600		07600					
7,5	21,0	7,2	40,0	44	80	8	2						07800		07800
8,0	17,0	7,7	24,0	28	64	8	2	08100		08100					
8,0	21,0	7,7	40,0	44	80	8	2						08300		08300
8,5	21,0	8,2	30,0	34	74	10	2	08600		08600					
8,5	26,0	8,2	50,0	54	94	10	2						08800		08800
9,0	21,0	8,7	30,0	34	74	10	2	09100		09100					
9,0	26,0	8,7	50,0	54	94	10	2						09300		09300
9,5	21,0	9,2	30,0	34	74	10	2	09600		09600					
9,5	26,0	9,2	50,0	54	94	10	2						09800		09800
10,0	21,0	9,7	30,0	34	74	10	2	10100		10100					
10,0	26,0	9,7	50,0	54	94	10	2						10300		10300
10,5	25,0	10,1	36,0	40	85	12	2	10600		10600					
10,5	31,0	10,1	60,0	64	109	12	2						10800		10800
11,0	25,0	10,6	36,0	40	85	12	2	11100		11100					
11,0	31,0	10,6	60,0	64	109	12	2						11300		11300
11,5	25,0	11,1	36,0	40	85	12	2	11600		11600					
11,5	31,0	11,1	60,0	64	109	12	2						11800		11800
12,0	25,0	11,6	36,0	40	85	12	2	12100		12100					
12,0	31,0	11,6	60,0	64	109	12	2						12300		12300
12,5	29,0	12,1	42,0	46	91	14	2			12600					
12,5	36,0	12,1	70,0	74	119	14	2								12800

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

Continued on next page

AluLine – End milling cutter

The specialist for machining non-ferrous metals



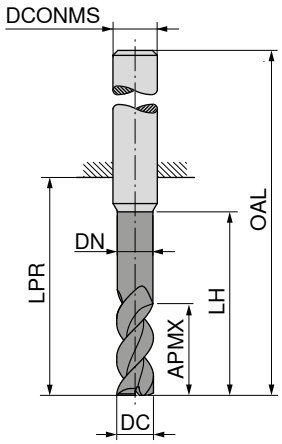

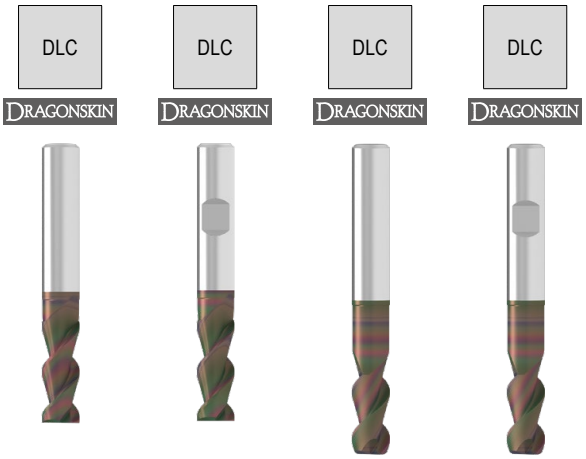

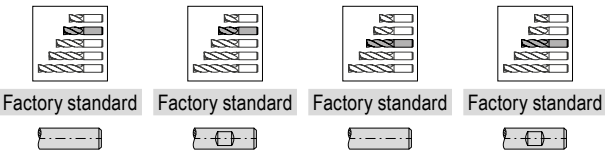

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	53 627 ...	53 628 ...	53 637 ...	53 638 ...
mm	mm	mm	mm	mm	mm	mm					
13,0	29,0	12,6	42,0	46	91	14	2		13100		
13,0	36,0	12,6	70,0	74	119	14	2				13300
13,5	29,0	13,1	42,0	46	91	14	2		13600		
13,5	36,0	13,1	70,0	74	119	14	2				13800
14,0	29,0	13,6	42,0	46	91	14	2		14100		
14,0	36,0	13,6	70,0	74	119	14	2				14300
14,5	33,0	14,0	48,0	52	100	16	2		14600		
14,5	41,0	14,0	80,0	84	132	16	2				14800
15,0	33,0	14,5	48,0	52	100	16	2		15100		
15,0	41,0	14,5	80,0	84	132	16	2				15300
15,5	33,0	15,0	48,0	52	100	16	2		15600		
15,5	41,0	15,0	80,0	84	132	16	2				15800
16,0	33,0	15,5	48,0	52	100	16	2		16100		
16,0	41,0	15,5	80,0	84	132	16	2				16300
16,5	38,0	16,0	54,0	58	106	18	2		16600		
16,5	47,0	16,0	90,0	94	142	18	2				16800
17,0	38,0	16,5	54,0	58	106	18	2		17100		
17,0	47,0	16,5	90,0	94	142	18	2				17300
17,5	38,0	17,0	54,0	58	106	18	2		17600		
17,5	47,0	17,0	90,0	94	142	18	2				17800
18,0	38,0	17,5	54,0	58	106	18	2		18100		
18,0	47,0	17,5	90,0	94	142	18	2				18300
18,5	42,0	18,0	60,0	64	114	20	2		18600		
18,5	52,0	18,0	100,0	104	154	20	2				18800
19,0	42,0	18,5	60,0	64	114	20	2		19100		
19,0	52,0	18,5	100,0	104	154	20	2				19300
19,5	42,0	19,0	60,0	64	114	20	2		19600		
19,5	52,0	19,0	100,0	104	154	20	2				19800
20,0	42,0	19,5	60,0	64	114	20	2		20100		
20,0	52,0	19,5	100,0	104	154	20	2				20300
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

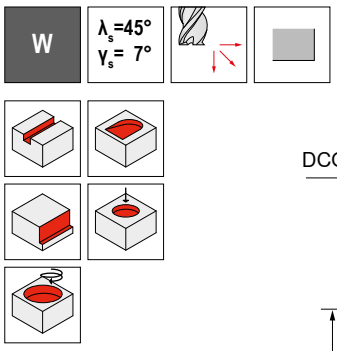

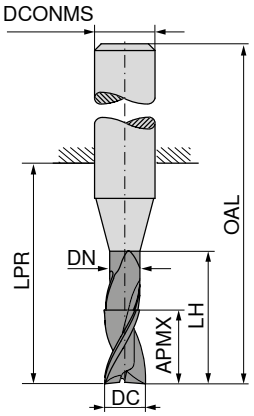

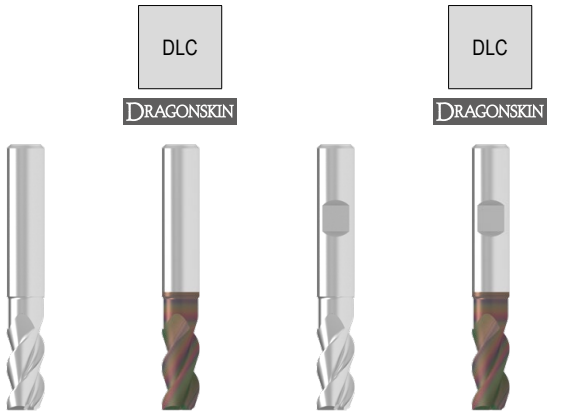

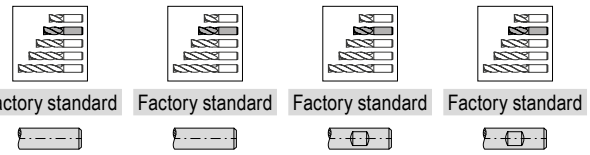

	Factory standard	Factory standard	Factory standard	Factory standard
	53 615 ...	53 617 ...	53 616 ...	53 618 ...

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP				
2,0	4,5	1,8	6,0	14	50	6	3	02100	02100	02100	02100
2,5	5,5	2,3	7,5	19	55	6	3	02600	02600	02600	02600
3,0	6,5	2,8	9,0	19	55	6	3	03100	03100	03100	03100
3,5	8,5	3,3	12,0	19	55	6	3	03600	03600	03600	03600
4,0	8,5	3,8	12,0	19	55	6	3	04100	04100	04100	04100
4,5	10,5	4,3	15,0	22	58	6	3	04600	04600	04600	04600
5,0	10,5	4,8	15,0	22	58	6	3	05100	05100	05100	05100
5,5	13,0	5,3	18,0	22	58	6	3	05600	05600	05600	05600
6,0	13,0	5,8	18,0	22	58	6	3	06100	06100	06100	06100
6,5	17,0	6,2	24,0	28	64	8	3	06600	06600	06600	06600
7,0	17,0	6,7	24,0	28	64	8	3	07100	07100	07100	07100
7,5	17,0	7,2	24,0	28	64	8	3	07600	07600	07600	07600
8,0	17,0	7,7	24,0	28	64	8	3	08100	08100	08100	08100
8,5	21,0	8,2	30,0	34	74	10	3	08600	08600	08600	08600
9,0	21,0	8,7	30,0	34	74	10	3	09100	09100	09100	09100
9,5	21,0	9,2	30,0	34	74	10	3	09600	09600	09600	09600
10,0	21,0	9,7	30,0	34	74	10	3	10100	10100	10100	10100
10,5	25,0	10,1	36,0	40	85	12	3	10600	10600	10600	10600
11,0	25,0	10,6	36,0	40	85	12	3	11100	11100	11100	11100
11,5	25,0	11,1	36,0	40	85	12	3	11600	11600	11600	11600
12,0	25,0	11,6	36,0	40	85	12	3	12100	12100	12100	12100
12,5	29,0	12,1	42,0	46	91	14	3			12600	12600
13,0	29,0	12,6	42,0	46	91	14	3			13100	13100
13,5	29,0	13,1	42,0	46	91	14	3			13600	13600
14,0	29,0	13,6	42,0	46	91	14	3			14100	14100
14,5	33,0	14,0	48,0	52	100	16	3			14600	14600
15,0	33,0	14,5	48,0	52	100	16	3			15100	15100
15,5	33,0	15,0	48,0	52	100	16	3			15600	15600
16,0	33,0	15,5	48,0	52	100	16	3			16100	16100
16,5	38,0	16,0	54,0	58	106	18	3			16600	16600
17,0	38,0	16,5	54,0	58	106	18	3			17100	17100
17,5	38,0	17,0	54,0	58	106	18	3			17600	17600
18,0	38,0	17,5	54,0	58	106	18	3			18100	18100
18,5	42,0	18,0	60,0	64	114	20	3			18600	18600
19,0	42,0	18,5	60,0	64	114	20	3			19100	19100
19,5	42,0	19,0	60,0	64	114	20	3			19600	19600
20,0	42,0	19,5	60,0	64	114	20	3			20100	20100

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

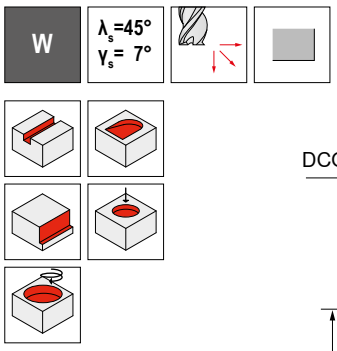

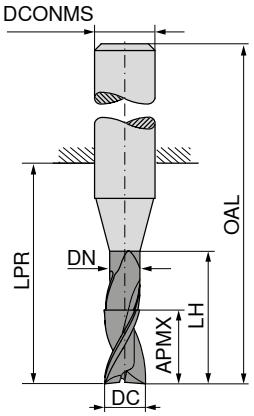

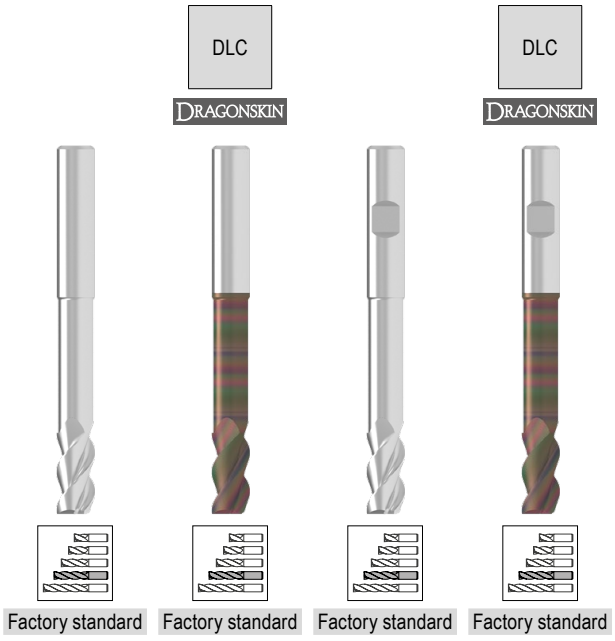

								Factory standard	Factory standard	Factory standard	Factory standard
								53 615 ...	53 617 ...	53 616 ...	53 618 ...
DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP				
2,0	5,5	1,8	10,0	19	55	6	3	02200	02200	02200	02200
2,5	6,5	2,3	12,5	22	58	6	3	02700	02700	02700	02700
3,0	8,0	2,8	15,0	22	58	6	3	03200	03200	03200	03200
3,5	10,5	3,3	20,0	26	62	6	3	03700	03700	03700	03700
4,0	10,5	3,8	20,0	26	62	6	3	04200	04200	04200	04200
4,5	13,0	4,3	25,0	34	70	6	3	04700	04700	04700	04700
5,0	13,0	4,8	25,0	34	70	6	3	05200	05200	05200	05200
5,5	16,0	5,3	30,0	34	70	6	3	05700	05700	05700	05700
6,0	16,0	5,8	30,0	34	70	6	3	06200	06200	06200	06200
6,5	21,0	6,2	40,0	44	80	8	3	06700	06700	06700	06700
7,0	21,0	6,7	40,0	44	80	8	3	07200	07200	07200	07200
7,5	21,0	7,2	40,0	44	80	8	3	07700	07700	07700	07700
8,0	21,0	7,7	40,0	44	80	8	3	08200	08200	08200	08200
8,5	26,0	8,2	50,0	54	94	10	3	08700	08700	08700	08700
9,0	26,0	8,7	50,0	54	94	10	3	09200	09200	09200	09200
9,5	26,0	9,2	50,0	54	94	10	3	09700	09700	09700	09700
10,0	26,0	9,7	50,0	54	94	10	3	10200	10200	10200	10200
10,5	31,0	10,1	60,0	64	109	12	3	10700	10700	10700	10700
11,0	31,0	10,6	60,0	64	109	12	3	11200	11200	11200	11200
11,5	31,0	11,1	60,0	64	109	12	3	11700	11700	11700	11700
12,0	31,0	11,6	60,0	64	109	12	3	12200	12200	12200	12200
12,5	36,0	12,1	70,0	74	119	14	3			12700	12700
13,0	36,0	12,6	70,0	74	119	14	3			13200	13200
13,5	36,0	13,1	70,0	74	119	14	3			13700	13700
14,0	36,0	13,6	70,0	74	119	14	3			14200	14200
14,5	41,0	14,0	80,0	84	132	16	3			14700	14700
15,0	41,0	14,5	80,0	84	132	16	3			15200	15200
15,5	41,0	15,0	80,0	84	132	16	3			15700	15700
16,0	41,0	15,5	80,0	84	132	16	3			16200	16200
16,5	47,0	16,0	90,0	94	142	18	3			16700	16700
17,0	47,0	16,5	90,0	94	142	18	3			17200	17200
17,5	47,0	17,0	90,0	94	142	18	3			17700	17700
18,0	47,0	17,5	90,0	94	142	18	3			18200	18200
18,5	52,0	18,0	100,0	104	154	20	3			18700	18700
19,0	52,0	18,5	100,0	104	154	20	3			19200	19200
19,5	52,0	19,0	100,0	104	154	20	3			19700	19700
20,0	52,0	19,5	100,0	104	154	20	3			20200	20200
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

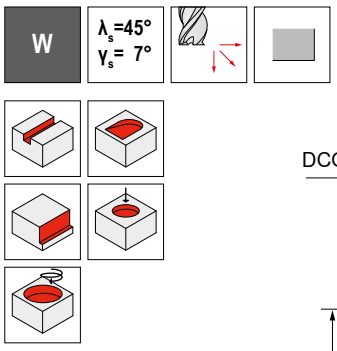

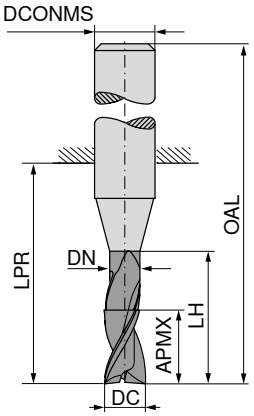

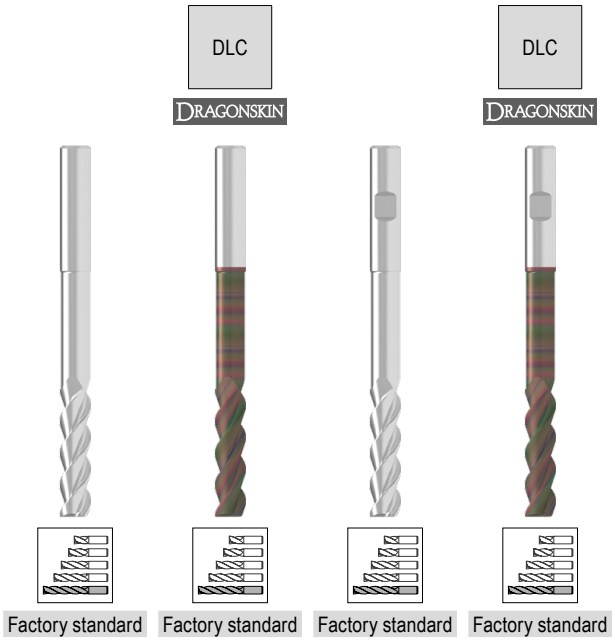

								Factory standard	Factory standard	Factory standard	Factory standard
								53 615 ...	53 617 ...	53 616 ...	53 618 ...
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm					
2,0	8,5	1,8	16	26	62	6	3	02400	02400	02400	02400
2,5	10,5	2,3	20	31	67	6	3	02900	02900	02900	02900
3,0	12,5	2,8	24	31	67	6	3	03400	03400	03400	03400
3,5	16,5	3,3	32	38	74	6	3	03900	03900	03900	03900
4,0	16,5	3,8	32	38	74	6	3	04400	04400	04400	04400
4,5	20,5	4,3	40	52	88	6	3	04900	04900	04900	04900
5,0	20,5	4,8	40	52	88	6	3	05400	05400	05400	05400
5,5	25,0	5,3	48	52	88	6	3	05900	05900	05900	05900
6,0	25,0	5,8	48	52	88	6	3	06400	06400	06400	06400
6,5	33,0	6,2	64	68	104	8	3	06900	06900	06900	06900
7,0	33,0	6,7	64	68	104	8	3	07400	07400	07400	07400
7,5	33,0	7,2	64	68	104	8	3	07900	07900	07900	07900
8,0	33,0	7,7	64	68	104	8	3	08400	08400	08400	08400
8,5	41,0	8,2	80	84	124	10	3	08900	08900	08900	08900
9,0	41,0	8,7	80	84	124	10	3	09400	09400	09400	09400
9,5	41,0	9,2	80	84	124	10	3	09900	09900	09900	09900
10,0	41,0	9,7	80	84	124	10	3	10400	10400	10400	10400
10,5	49,0	10,1	96	100	145	12	3	10900	10900	10900	10900
11,0	49,0	10,6	96	100	145	12	3	11400	11400	11400	11400
11,5	49,0	11,1	96	100	145	12	3	11900	11900	11900	11900
12,0	49,0	11,6	96	100	145	12	3	12400	12400	12400	12400
12,5	57,0	12,1	112	116	161	14	3			12900	12900
13,0	57,0	12,6	112	116	161	14	3			13400	13400
13,5	57,0	13,1	112	116	161	14	3			13900	13900
14,0	57,0	13,6	112	116	161	14	3			14400	14400
14,5	65,0	14,0	128	132	180	16	3			14900	14900
15,0	65,0	14,5	128	132	180	16	3			15400	15400
15,5	65,0	15,0	128	132	180	16	3			15900	15900
16,0	65,0	15,5	128	132	180	16	3			16400	16400
16,5	74,0	16,0	144	148	196	18	3			16900	16900
17,0	74,0	16,5	144	148	196	18	3			17400	17400
17,5	74,0	17,0	144	148	196	18	3			17900	17900
18,0	74,0	17,5	144	148	196	18	3			18400	18400
18,5	82,0	18,0	160	164	214	20	3			18900	18900
19,0	82,0	18,5	160	164	214	20	3			19400	19400
19,5	82,0	19,0	160	164	214	20	3			19900	19900
20,0	82,0	19,5	160	164	214	20	3			20400	20400
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





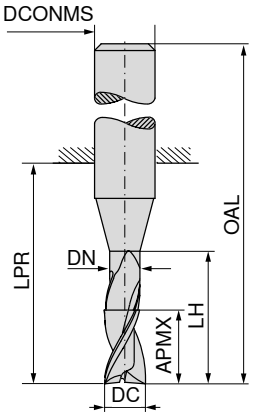

	Factory standard	Factory standard	Factory standard	Factory standard
	53 517 ...	53 518 ...	53 519 ...	53 520 ...

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP				
3	8	2,7	13	21	57	6	3				**030**
4	11	3,7	17	21	57	6	3				**040**
5	13	4,7	19	21	57	6	3			**050**	
6	13	5,7	19	21	57	6	3			**060**	
6	18	5,7	24	26	62	6	3				**060**
8	21	7,4	25	27	63	8	3		**080**		
8	24	7,4	30	32	68	8	3			**080**	
10	22	9,2	30	32	72	10	3		**100**		
10	30	9,2	38	40	80	10	3			**100**	
12	26	11,0	36	38	83	12	3		**120**		
12	36	11,0	46	48	93	12	3			**120**	
14	26	13,0	36	38	83	14	3	**140**			
16	36	15,0	42	44	92	16	3	**160**			
16	48	15,0	58	60	108	16	3			**160**	
18	36	17,0	42	44	92	18	3	**180**			
20	41	19,0	52	54	104	20	3	**200**			
20	60	19,0	74	76	126	20	3			**200**	

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

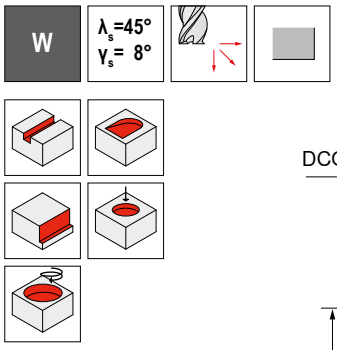

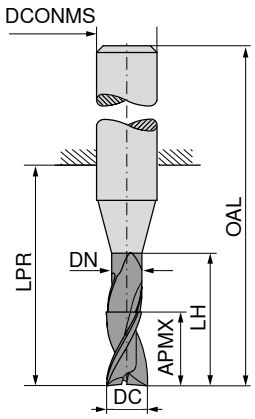

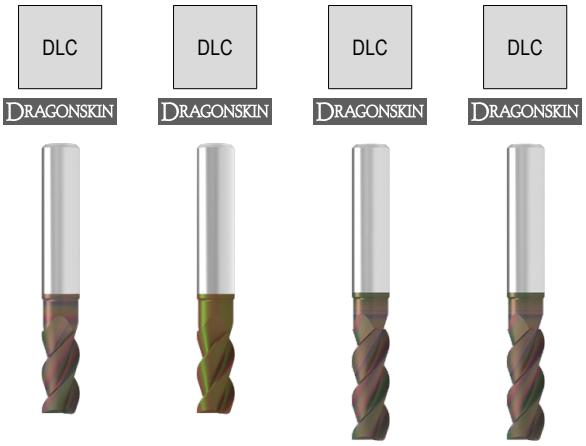

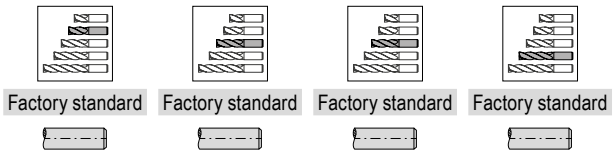

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	53 521 ...	53 522 ...	53 523 ...	53 524 ...
3	8	2,7	13	21	57	6	3				030
4	11	3,7	17	21	57	6	3				040
5	13	4,7	19	21	57	6	3			050	
6	13	5,7	19	21	57	6	3			060	
6	18	5,7	24	26	62	6	3				060
8	21	7,4	25	27	63	8	3		080		
8	24	7,4	30	32	68	8	3			080	
10	22	9,2	30	32	72	10	3		100		
10	30	9,2	38	40	80	10	3			100	
12	26	11,0	36	38	83	12	3		120		
12	36	11,0	46	48	93	12	3			120	
14	26	13,0	36	38	83	14	3	140			
16	36	15,0	42	44	92	16	3	160			
18	36	17,0	42	44	92	18	3	180			
20	41	19,0	52	54	104	20	3	200			
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





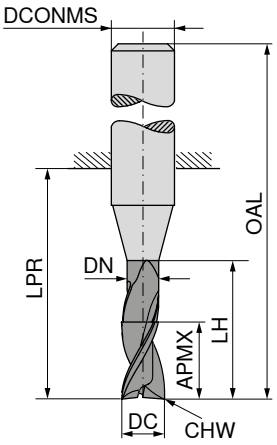

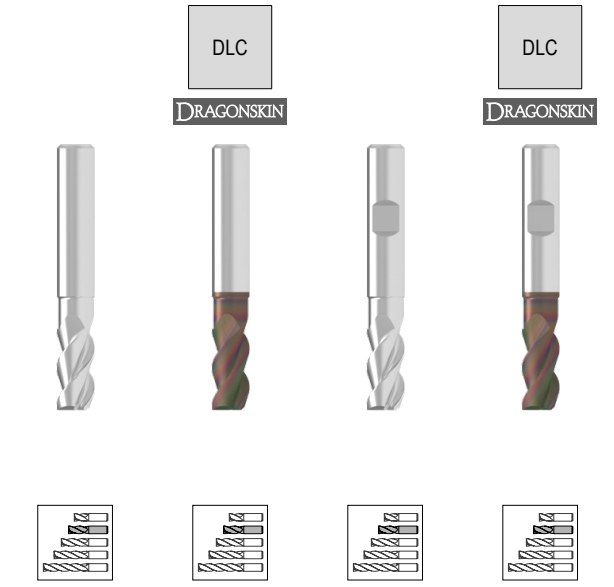

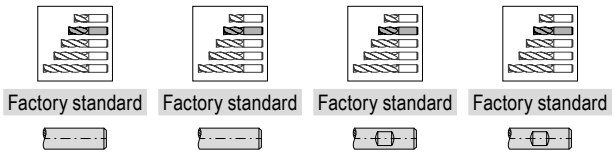

									Factory standard	Factory standard	Factory standard	Factory standard
									53 611 ...	53 613 ...	53 612 ...	53 614 ...
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
2,0	4,5	1,8	6,0	14	50	6	0,05	3	**02100**	**02100**	**02100**	**02100**
2,5	5,5	2,3	7,5	19	55	6	0,05	3	**02600**	**02600**	**02600**	**02600**
3,0	6,5	2,8	9,0	19	55	6	0,10	3	**03100**	**03100**	**03100**	**03100**
3,5	8,5	3,3	12,0	19	55	6	0,10	3	**03600**	**03600**	**03600**	**03600**
4,0	8,5	3,8	12,0	19	55	6	0,10	3	**04100**	**04100**	**04100**	**04100**
4,5	10,5	4,3	15,0	22	58	6	0,10	3	**04600**	**04600**	**04600**	**04600**
5,0	10,5	4,8	15,0	22	58	6	0,10	3	**05100**	**05100**	**05100**	**05100**
5,5	13,0	5,3	18,0	22	58	6	0,10	3	**05600**	**05600**	**05600**	**05600**
6,0	13,0	5,8	18,0	22	58	6	0,20	3	**06100**	**06100**	**06100**	**06100**
6,5	17,0	6,2	24,0	28	64	8	0,20	3	**06600**	**06600**	**06600**	**06600**
7,0	17,0	6,7	24,0	28	64	8	0,20	3	**07100**	**07100**	**07100**	**07100**
7,5	17,0	7,2	24,0	28	64	8	0,20	3	**07600**	**07600**	**07600**	**07600**
8,0	17,0	7,7	24,0	28	64	8	0,20	3	**08100**	**08100**	**08100**	**08100**
8,5	21,0	8,2	30,0	34	74	10	0,20	3	**08600**	**08600**	**08600**	**08600**
9,0	21,0	8,7	30,0	34	74	10	0,20	3	**09100**	**09100**	**09100**	**09100**
9,5	21,0	9,2	30,0	34	74	10	0,20	3	**09600**	**09600**	**09600**	**09600**
10,0	21,0	9,7	30,0	34	74	10	0,20	3	**10100**	**10100**	**10100**	**10100**
10,5	25,0	10,1	36,0	40	85	12	0,20	3	**10600**	**10600**	**10600**	**10600**
11,0	25,0	10,6	36,0	40	85	12	0,20	3	**11100**	**11100**	**11100**	**11100**
11,5	25,0	11,1	36,0	40	85	12	0,20	3	**11600**	**11600**	**11600**	**11600**
12,0	25,0	11,6	36,0	40	85	12	0,20	3	**12100**	**12100**	**12100**	**12100**
12,5	29,0	12,1	42,0	46	91	14	0,20	3			**12600**	**12600**
13,0	29,0	12,6	42,0	46	91	14	0,20	3			**13100**	**13100**
13,5	29,0	13,1	42,0	46	91	14	0,20	3			**13600**	**13600**
14,0	29,0	13,6	42,0	46	91	14	0,20	3			**14100**	**14100**
14,5	33,0	14,0	48,0	52	100	16	0,20	3			**14600**	**14600**
15,0	33,0	14,5	48,0	52	100	16	0,20	3			**15100**	**15100**
15,5	33,0	15,0	48,0	52	100	16	0,20	3			**15600**	**15600**
16,0	33,0	15,5	48,0	52	100	16	0,20	3			**16100**	**16100**
16,5	38,0	16,0	54,0	58	106	18	0,20	3			**16600**	**16600**
17,0	38,0	16,5	54,0	58	106	18	0,20	3			**17100**	**17100**
17,5	38,0	17,0	54,0	58	106	18	0,20	3			**17600**	**17600**
18,0	38,0	17,5	54,0	58	106	18	0,20	3			**18100**	**18100**
18,5	42,0	18,0	60,0	64	114	20	0,20	3			**18600**	**18600**
19,0	42,0	18,5	60,0	64	114	20	0,20	3			**19100**	**19100**
19,5	42,0	19,0	60,0	64	114	20	0,20	3			**19600**	**19600**
20,0	42,0	19,5	60,0	64	114	20	0,20	3			**20100**	**20100**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





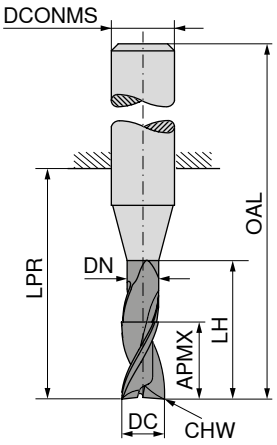

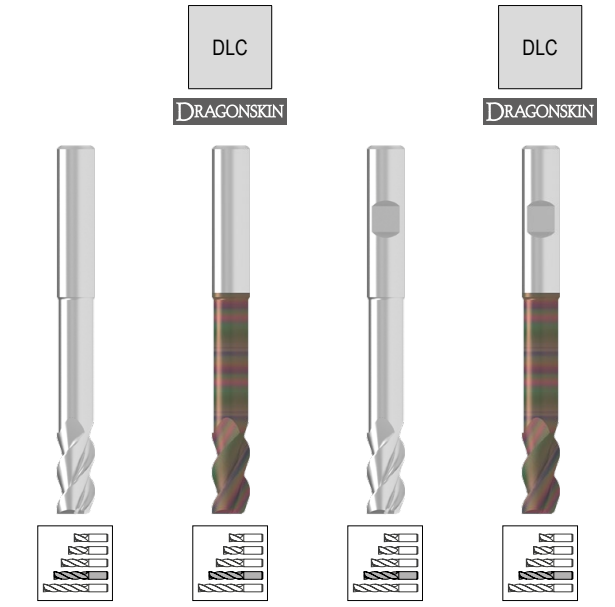

									Factory standard	Factory standard	Factory standard	Factory standard
									53 611 ...	53 613 ...	53 612 ...	53 614 ...
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
2,0	5,5	1,8	10,0	19	55	6	0,05	3	**02200**	**02200**	**02200**	**02200**
2,5	6,5	2,3	12,5	22	58	6	0,05	3	**02700**	**02700**	**02700**	**02700**
3,0	8,0	2,8	15,0	22	58	6	0,10	3	**03200**	**03200**	**03200**	**03200**
3,5	10,5	3,3	20,0	26	62	6	0,10	3	**03700**	**03700**	**03700**	**03700**
4,0	10,5	3,8	20,0	26	62	6	0,10	3	**04200**	**04200**	**04200**	**04200**
4,5	13,0	4,3	25,0	34	70	6	0,10	3	**04700**	**04700**	**04700**	**04700**
5,0	13,0	4,8	25,0	34	70	6	0,10	3	**05200**	**05200**	**05200**	**05200**
5,5	16,0	5,3	30,0	34	70	6	0,10	3	**05700**	**05700**	**05700**	**05700**
6,0	16,0	5,8	30,0	34	70	6	0,20	3	**06200**	**06200**	**06200**	**06200**
6,5	21,0	6,2	40,0	44	80	8	0,20	3	**06700**	**06700**	**06700**	**06700**
7,0	21,0	6,7	40,0	44	80	8	0,20	3	**07200**	**07200**	**07200**	**07200**
7,5	21,0	7,2	40,0	44	80	8	0,20	3	**07700**	**07700**	**07700**	**07700**
8,0	21,0	7,7	40,0	44	80	8	0,20	3	**08200**	**08200**	**08200**	**08200**
8,5	26,0	8,2	50,0	54	94	10	0,20	3	**08700**	**08700**	**08700**	**08700**
9,0	26,0	8,7	50,0	54	94	10	0,20	3	**09200**	**09200**	**09200**	**09200**
9,5	26,0	9,2	50,0	54	94	10	0,20	3	**09700**	**09700**	**09700**	**09700**
10,0	26,0	9,7	50,0	54	94	10	0,20	3	**10200**	**10200**	**10200**	**10200**
10,5	31,0	10,1	60,0	64	109	12	0,20	3	**10700**	**10700**	**10700**	**10700**
11,0	31,0	10,6	60,0	64	109	12	0,20	3	**11200**	**11200**	**11200**	**11200**
11,5	31,0	11,1	60,0	64	109	12	0,20	3	**11700**	**11700**	**11700**	**11700**
12,0	31,0	11,6	60,0	64	109	12	0,20	3	**12200**	**12200**	**12200**	**12200**
12,5	36,0	12,1	70,0	74	119	14	0,20	3			**12700**	**12700**
13,0	36,0	12,6	70,0	74	119	14	0,20	3			**13200**	**13200**
13,5	36,0	13,1	70,0	74	119	14	0,20	3			**13700**	**13700**
14,0	36,0	13,6	70,0	74	119	14	0,20	3			**14200**	**14200**
14,5	41,0	14,0	80,0	84	132	16	0,20	3			**14700**	**14700**
15,0	41,0	14,5	80,0	84	132	16	0,20	3			**15200**	**15200**
15,5	41,0	15,0	80,0	84	132	16	0,20	3			**15700**	**15700**
16,0	41,0	15,5	80,0	84	132	16	0,20	3			**16200**	**16200**
16,5	47,0	16,0	90,0	94	142	18	0,20	3			**16700**	**16700**
17,0	47,0	16,5	90,0	94	142	18	0,20	3			**17200**	**17200**
17,5	47,0	17,0	90,0	94	142	18	0,20	3			**17700**	**17700**
18,0	47,0	17,5	90,0	94	142	18	0,20	3			**18200**	**18200**
18,5	52,0	18,0	100,0	104	154	20	0,20	3			**18700**	**18700**
19,0	52,0	18,5	100,0	104	154	20	0,20	3			**19200**	**19200**
19,5	52,0	19,0	100,0	104	154	20	0,20	3			**19700**	**19700**
20,0	52,0	19,5	100,0	104	154	20	0,20	3			**20200**	**20200**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





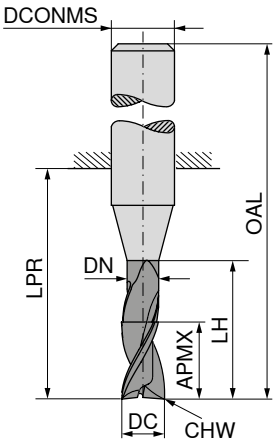

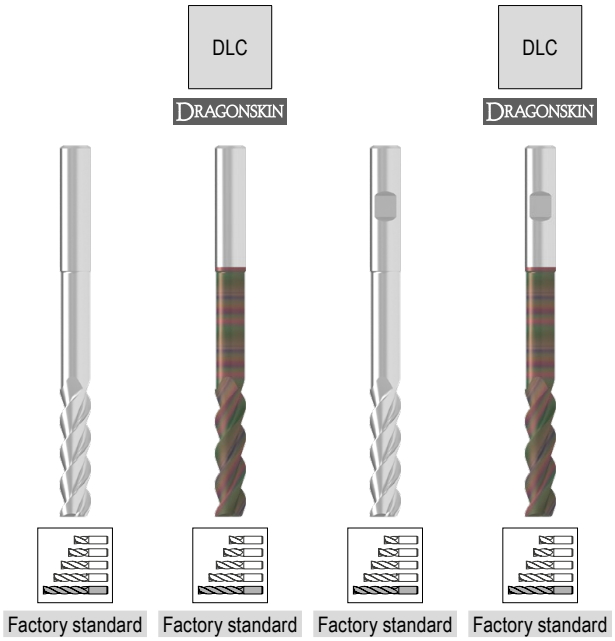

									Factory standard	Factory standard	Factory standard	Factory standard
									53 611 ...	53 613 ...	53 612 ...	53 614 ...
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
2,0	8,5	1,8	16	26	62	6	0,05	3	**02400**	**02400**	**02400**	**02400**
2,5	10,5	2,3	20	31	67	6	0,05	3	**02900**	**02900**	**02900**	**02900**
3,0	12,5	2,8	24	31	67	6	0,10	3	**03400**	**03400**	**03400**	**03400**
3,5	16,5	3,3	32	38	74	6	0,10	3	**03900**	**03900**	**03900**	**03900**
4,0	16,5	3,8	32	38	74	6	0,10	3	**04400**	**04400**	**04400**	**04400**
4,5	20,5	4,3	40	52	88	6	0,10	3	**04900**	**04900**	**04900**	**04900**
5,0	20,5	4,8	40	52	88	6	0,10	3	**05400**	**05400**	**05400**	**05400**
5,5	25,0	5,3	48	52	88	6	0,10	3	**05900**	**05900**	**05900**	**05900**
6,0	25,0	5,8	48	52	88	6	0,20	3	**06400**	**06400**	**06400**	**06400**
6,5	33,0	6,2	64	68	104	8	0,20	3	**06900**	**06900**	**06900**	**06900**
7,0	33,0	6,7	64	68	104	8	0,20	3	**07400**	**07400**	**07400**	**07400**
7,5	33,0	7,2	64	68	104	8	0,20	3	**07900**	**07900**	**07900**	**07900**
8,0	33,0	7,7	64	68	104	8	0,20	3	**08400**	**08400**	**08400**	**08400**
8,5	41,0	8,2	80	84	124	10	0,20	3	**08900**	**08900**	**08900**	**08900**
9,0	41,0	8,7	80	84	124	10	0,20	3	**09400**	**09400**	**09400**	**09400**
9,5	41,0	9,2	80	84	124	10	0,20	3	**09900**	**09900**	**09900**	**09900**
10,0	41,0	9,7	80	84	124	10	0,20	3	**10400**	**10400**	**10400**	**10400**
10,5	49,0	10,1	96	100	145	12	0,20	3	**10900**	**10900**	**10900**	**10900**
11,0	49,0	10,6	96	100	145	12	0,20	3	**11400**	**11400**	**11400**	**11400**
11,5	49,0	11,1	96	100	145	12	0,20	3	**11900**	**11900**	**11900**	**11900**
12,0	49,0	11,6	96	100	145	12	0,20	3	**12400**	**12400**	**12400**	**12400**
12,5	57,0	12,1	112	116	161	14	0,20	3			**12900**	**12900**
13,0	57,0	12,6	112	116	161	14	0,20	3			**13400**	**13400**
13,5	57,0	13,1	112	116	161	14	0,20	3			**13900**	**13900**
14,0	57,0	13,6	112	116	161	14	0,20	3			**14400**	**14400**
14,5	65,0	14,0	128	132	180	16	0,20	3			**14900**	**14900**
15,0	65,0	14,5	128	132	180	16	0,20	3			**15400**	**15400**
15,5	65,0	15,0	128	132	180	16	0,20	3			**15900**	**15900**
16,0	65,0	15,5	128	132	180	16	0,20	3			**16400**	**16400**
16,5	74,0	16,0	144	148	196	18	0,20	3			**16900**	**16900**
17,0	74,0	16,5	144	148	196	18	0,20	3			**17400**	**17400**
17,5	74,0	17,0	144	148	196	18	0,20	3			**17900**	**17900**
18,0	74,0	17,5	144	148	196	18	0,20	3			**18400**	**18400**
18,5	82,0	18,0	160	164	214	20	0,20	3			**18900**	**18900**
19,0	82,0	18,5	160	164	214	20	0,20	3			**19400**	**19400**
19,5	82,0	19,0	160	164	214	20	0,20	3			**19900**	**19900**
20,0	82,0	19,5	160	164	214	20	0,20	3			**20400**	**20400**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With graduated flute depth





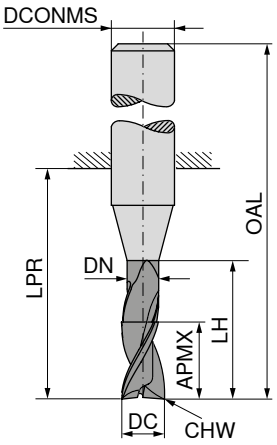

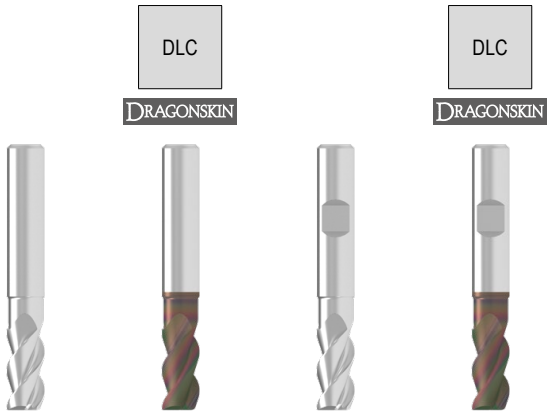

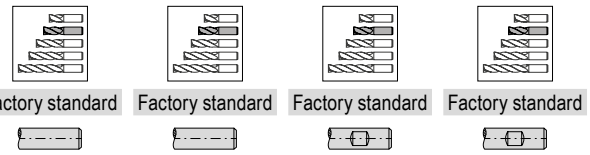

									Factory standard	Factory standard	Factory standard	Factory standard
									53 584 ...	53 598 ...	53 597 ...	53 599 ...
DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
3,0	8	2,7	12	21	57	6	0,1	3	03000	03000	03000	03000
3,5	8	3,2	12	21	57	6	0,1	3	03600	03600	03600	03600
4,0	11	3,7	18	21	57	6	0,1	3	04000	04000	04000	04000
4,5	11	4,2	18	21	57	6	0,1	3	04600	04600	04600	04600
5,0	13	4,7	18	21	57	6	0,1	3	05000	05000	05000	05000
5,5	13	5,2	18	21	57	6	0,1	3	05600	05600	05600	05600
6,0	13	5,7	18	21	57	6	0,2	3	06000	06000	06000	06000
6,5	21	6,1	25	27	63	8	0,2	3	06600	06600	06600	06600
7,0	21	6,6	25	27	63	8	0,2	3	07000	07000	07000	07000
7,5	21	7,1	25	27	63	8	0,2	3	07600	07600	07600	07600
8,0	21	7,4	25	27	63	8	0,2	3	08000	08000	08000	08000
8,5	22	7,9	30	33	73	10	0,2	3	08600	08600	08600	08600
9,0	22	8,4	30	33	73	10	0,2	3	09000	09000	09000	09000
9,5	22	8,9	30	33	73	10	0,2	3	09600	09600	09600	09600
10,0	22	9,2	30	33	73	10	0,2	3	10000	10000	10000	10000
10,5	26	9,7	36	38	83	12	0,2	3	10600	10600	10600	10600
11,0	26	10,0	36	38	83	12	0,2	3	11000	11000	11000	11000
11,5	26	10,5	36	38	83	12	0,2	3	11600	11600	11600	11600
12,0	26	11,0	36	38	83	12	0,2	3	12000	12000	12000	12000
12,5	26	11,5	36	38	83	14	0,2	3			12600	12600
13,0	26	12,0	36	38	83	14	0,2	3			13000	13000
13,5	26	12,5	36	38	83	14	0,2	3			13600	13600
14,0	26	13,0	36	38	83	14	0,2	3			14000	14000
14,5	36	13,5	42	44	92	16	0,2	3			14600	14600
15,0	36	14,0	42	44	92	16	0,2	3			15000	15000
15,5	36	14,5	42	44	92	16	0,2	3			15600	15600
16,0	36	15,0	42	44	92	16	0,2	3			16000	16000
16,5	36	15,5	42	44	92	18	0,2	3			16600	16600
17,0	36	16,0	42	44	92	18	0,2	3			17000	17000
17,5	36	16,5	42	44	92	18	0,2	3			17600	17600
18,0	36	17,0	42	44	92	18	0,2	3			18000	18000
18,5	41	17,5	52	54	104	20	0,2	3			18600	18600
19,0	41	18,0	52	54	104	20	0,2	3			19000	19000
19,5	41	18,5	52	54	104	20	0,2	3			19600	19600
20,0	41	19,0	52	54	104	20	0,2	3			20000	20000
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes





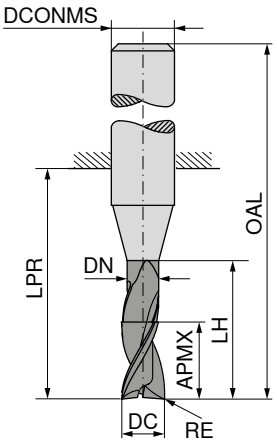

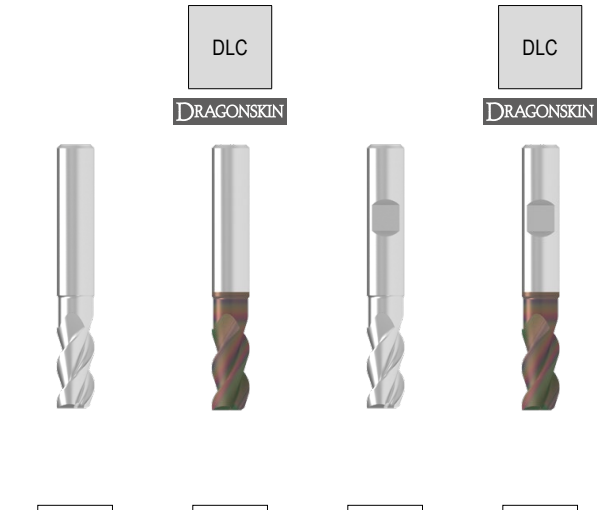

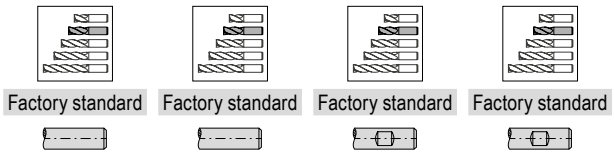

									Factory standard	Factory standard	Factory standard	Factory standard
									53 708 ...	53 710 ...	53 709 ...	53 711 ...
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
2	0,3	4,5	1,8	6	14	50	6	3	02103	02103	02103	02103
2	0,5	4,5	1,8	6	14	50	6	3	02105	02105	02105	02105
3	0,3	6,5	2,7	9	19	55	6	3	03103	03103	03103	03103
3	0,5	6,5	2,7	9	19	55	6	3	03105	03105	03105	03105
3	1,0	6,5	2,7	9	19	55	6	3	03110	03110	03110	03110
4	0,3	8,5	3,7	12	19	55	6	3	04103	04103	04103	04103
4	0,5	8,5	3,7	12	19	55	6	3	04105	04105	04105	04105
4	1,0	8,5	3,7	12	19	55	6	3	04110	04110	04110	04110
5	0,3	10,5	4,7	15	22	58	6	3	05103	05103	05103	05103
5	0,5	10,5	4,7	15	22	58	6	3	05105	05105	05105	05105
5	1,0	10,5	4,7	15	22	58	6	3	05110	05110	05110	05110
6	0,3	13,0	5,7	18	22	58	6	3	06103	06103	06103	06103
6	0,5	13,0	5,7	18	22	58	6	3	06105	06105	06105	06105
6	1,0	13,0	5,7	18	22	58	6	3	06110	06110	06110	06110
6	1,5	13,0	5,7	18	22	58	6	3	06115	06115	06115	06115
8	0,3	17,0	7,4	24	28	64	8	3	08103	08103	08103	08103
8	0,5	17,0	7,4	24	28	64	8	3	08105	08105	08105	08105
8	1,0	17,0	7,4	24	28	64	8	3	08110	08110	08110	08110
8	1,5	17,0	7,4	24	28	64	8	3	08115	08115	08115	08115
8	2,0	17,0	7,4	24	28	64	8	3	08120	08120	08120	08120
10	0,3	21,0	9,2	30	34	74	10	3	10103	10103	10103	10103
10	0,5	21,0	9,2	30	34	74	10	3	10105	10105	10105	10105
10	1,0	21,0	9,2	30	34	74	10	3	10110	10110	10110	10110
10	1,5	21,0	9,2	30	34	74	10	3	10115	10115	10115	10115
10	2,0	21,0	9,2	30	34	74	10	3	10120	10120	10120	10120
10	3,0	21,0	9,2	30	34	74	10	3	10130	10130	10130	10130
12	0,3	25,0	11,0	36	40	85	12	3	12103	12103	12103	12103
12	0,5	25,0	11,0	36	40	85	12	3	12105	12105	12105	12105
12	1,0	25,0	11,0	36	40	85	12	3	12110	12110	12110	12110
12	1,5	25,0	11,0	36	40	85	12	3	12115	12115	12115	12115
12	2,0	25,0	11,0	36	40	85	12	3	12120	12120	12120	12120
12	3,0	25,0	11,0	36	40	85	12	3	12130	12130	12130	12130
12	4,0	25,0	11,0	36	40	85	12	3	12140	12140	12140	12140
16	0,3	33,0	15,0	48	52	100	16	3			16103	16103
16	0,5	33,0	15,0	48	52	100	16	3			16105	16105
16	1,0	33,0	15,0	48	52	100	16	3			16110	16110
16	1,5	33,0	15,0	48	52	100	16	3			16115	16115

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

Continued on next page

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes





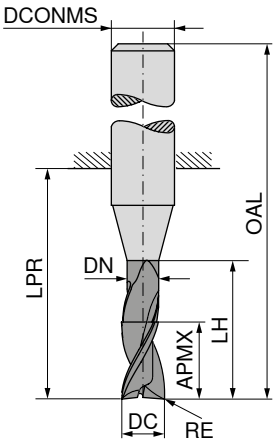

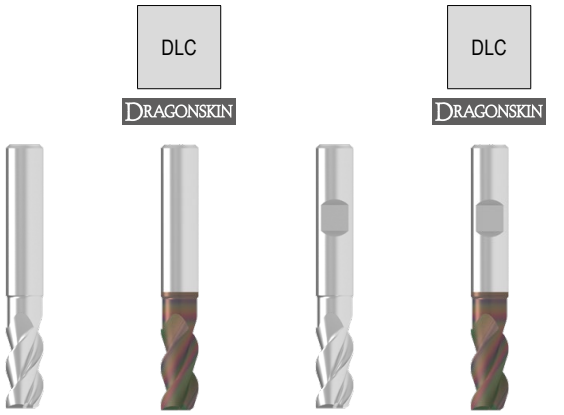

Factory standard	Factory standard	Factory standard	Factory standard
53 708 ...	**53 710 ...**	**53 709 ...**	**53 711 ...**

DC h6 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP				
16	2,0	33,0	15,0	48	52	100	16	3			**16120**	**16120**
16	3,0	33,0	15,0	48	52	100	16	3			**16130**	**16130**
16	4,0	33,0	15,0	48	52	100	16	3			**16140**	**16140**
20	0,5	42,0	19,0	60	64	114	20	3			**20105**	**20105**
20	1,0	42,0	19,0	60	64	114	20	3			**20110**	**20110**
20	1,5	42,0	19,0	60	64	114	20	3			**20115**	**20115**
20	2,0	42,0	19,0	60	64	114	20	3			**20120**	**20120**
20	3,0	42,0	19,0	60	64	114	20	3			**20130**	**20130**
20	4,0	42,0	19,0	60	64	114	20	3			**20140**	**20140**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



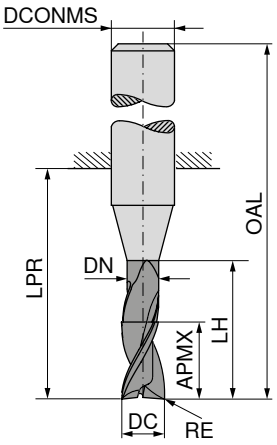

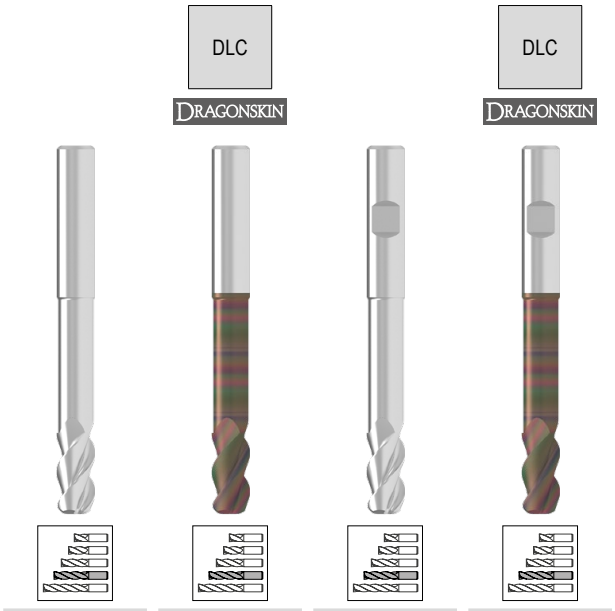

									Factory standard	Factory standard	Factory standard	Factory standard
									53 708 ...	53 710 ...	53 709 ...	53 711 ...
DC h6 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP				
2	0,3	5,5	1,8	10	19	55	6	3	02203	02203	02203	02203
2	0,5	5,5	1,8	10	19	55	6	3	02205	02205	02205	02205
3	0,3	8,0	2,7	15	22	58	6	3	03203	03203	03203	03203
3	0,5	8,0	2,7	15	22	58	6	3	03205	03205	03205	03205
3	1,0	8,0	2,7	15	22	58	6	3	03210	03210	03210	03210
4	0,3	10,5	3,7	20	26	62	6	3	04203	04203	04203	04203
4	0,5	10,5	3,7	20	26	62	6	3	04205	04205	04205	04205
4	1,0	10,5	3,7	20	26	62	6	3	04210	04210	04210	04210
5	0,3	13,0	4,7	25	34	70	6	3	05203	05203	05203	05203
5	0,5	13,0	4,7	25	34	70	6	3	05205	05205	05205	05205
5	1,0	13,0	4,7	25	34	70	6	3	05210	05210	05210	05210
6	0,3	16,0	5,7	30	34	70	6	3	06203	06203	06203	06203
6	0,5	16,0	5,7	30	34	70	6	3	06205	06205	06205	06205
6	1,0	16,0	5,7	30	34	70	6	3	06210	06210	06210	06210
6	1,5	16,0	5,7	30	34	70	6	3	06215	06215	06215	06215
8	0,3	21,0	7,4	40	44	80	8	3	08203	08203	08203	08203
8	0,5	21,0	7,4	40	44	80	8	3	08205	08205	08205	08205
8	1,0	21,0	7,4	40	44	80	8	3	08210	08210	08210	08210
8	1,5	21,0	7,4	40	44	80	8	3	08215	08215	08215	08215
8	2,0	21,0	7,4	40	44	80	8	3	08220	08220	08220	08220
10	0,3	26,0	9,2	50	54	94	10	3	10203	10203	10203	10203
10	0,5	26,0	9,2	50	54	94	10	3	10205	10205	10205	10205
10	1,0	26,0	9,2	50	54	94	10	3	10210	10210	10210	10210
10	1,5	26,0	9,2	50	54	94	10	3	10215	10215	10215	10215
10	2,0	26,0	9,2	50	54	94	10	3	10220	10220	10220	10220
10	3,0	26,0	9,2	50	54	94	10	3	10230	10230	10230	10230
12	0,3	31,0	11,0	60	64	109	12	3	12203	12203	12203	12203
12	0,5	31,0	11,0	60	64	109	12	3	12205	12205	12205	12205
12	1,0	31,0	11,0	60	64	109	12	3	12210	12210	12210	12210
12	1,5	31,0	11,0	60	64	109	12	3	12215	12215	12215	12215
12	2,0	31,0	11,0	60	64	109	12	3	12220	12220	12220	12220
12	3,0	31,0	11,0	60	64	109	12	3	12230	12230	12230	12230
12	4,0	31,0	11,0	60	64	109	12	3	12240	12240	12240	12240
16	0,3	41,0	15,0	80	84	132	16	3			16203	16203
16	0,5	41,0	15,0	80	84	132	16	3			16205	16205
16	1,0	41,0	15,0	80	84	132	16	3			16210	16210

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

Continued on next page

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



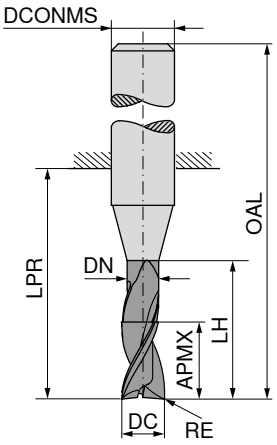

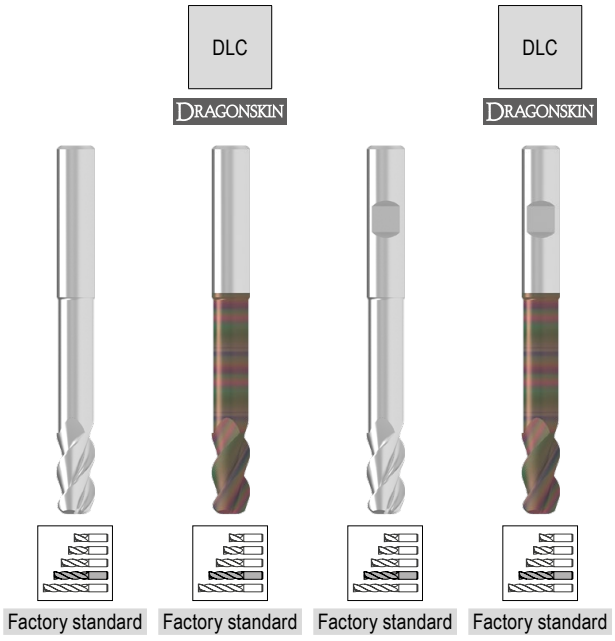

									Factory standard	Factory standard	Factory standard	Factory standard
									53 708 ...	53 710 ...	53 709 ...	53 711 ...
DC h6 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP				
16	1,5	41,0	15,0	80	84	132	16	3			**16215**	**16215**
16	2,0	41,0	15,0	80	84	132	16	3			**16220**	**16220**
16	3,0	41,0	15,0	80	84	132	16	3			**16230**	**16230**
16	4,0	41,0	15,0	80	84	132	16	3			**16240**	**16240**
20	0,5	52,0	19,0	100	104	154	20	3			**20205**	**20205**
20	1,0	52,0	19,0	100	104	154	20	3			**20210**	**20210**
20	1,5	52,0	19,0	100	104	154	20	3			**20215**	**20215**
20	2,0	52,0	19,0	100	104	154	20	3			**20220**	**20220**
20	3,0	52,0	19,0	100	104	154	20	3			**20230**	**20230**
20	4,0	52,0	19,0	100	104	154	20	3			**20240**	**20240**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



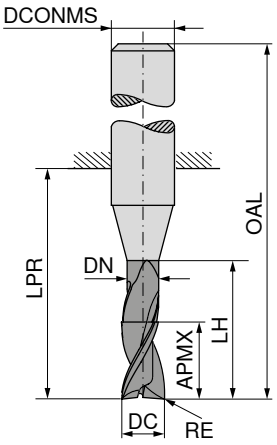

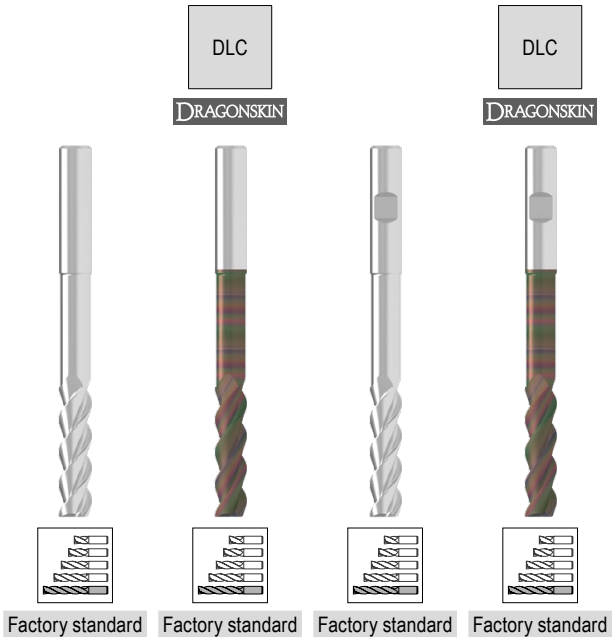

									Factory standard		Factory standard		Factory standard		Factory standard	
									53 708 ...		53 710 ...		53 709 ...		53 711 ...	
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP								
mm	mm	mm	mm	mm	mm	mm	mm									
2	0,3	8,5	1,8	16	26	62	6	3	02403		02403		02403		02403	
2	0,5	8,5	1,8	16	26	62	6	3	02405		02405		02405		02405	
3	0,3	12,5	2,7	24	31	67	6	3	03403		03403		03403		03403	
3	0,5	12,5	2,7	24	31	67	6	3	03405		03405		03405		03405	
3	1,0	12,5	2,7	24	31	67	6	3	03410		03410		03410		03410	
4	0,3	16,5	3,7	32	38	74	6	3	04403		04403		04403		04403	
4	0,5	16,5	3,7	32	38	74	6	3	04405		04405		04405		04405	
4	1,0	16,5	3,7	32	38	74	6	3	04410		04410		04410		04410	
5	0,3	20,5	4,7	40	52	88	6	3	05403		05403		05403		05403	
5	0,5	20,5	4,7	40	52	88	6	3	05405		05405		05405		05405	
5	1,0	20,5	4,7	40	52	88	6	3	05410		05410		05410		05410	
6	0,3	25,0	5,7	48	52	88	6	3	06403		06403		06403		06403	
6	0,5	25,0	5,7	48	52	88	6	3	06405		06405		06405		06405	
6	1,0	25,0	5,7	48	52	88	6	3	06410		06410		06410		06410	
6	1,5	25,0	5,7	48	52	88	6	3	06415		06415		06415		06415	
8	0,3	33,0	7,4	64	68	104	8	3	08403		08403		08403		08403	
8	0,5	33,0	7,4	64	68	104	8	3	08405		08405		08405		08405	
8	1,0	33,0	7,4	64	68	104	8	3	08410		08410		08410		08410	
8	1,5	33,0	7,4	64	68	104	8	3	08415		08415		08415		08415	
8	2,0	33,0	7,4	64	68	104	8	3	08420		08420		08420		08420	
10	0,3	41,0	9,2	80	84	124	10	3	10403		10403		10403		10403	
10	0,5	41,0	9,2	80	84	124	10	3	10405		10405		10405		10405	
10	1,0	41,0	9,2	80	84	124	10	3	10410		10410		10410		10410	
10	1,5	41,0	9,2	80	84	124	10	3	10415		10415		10415		10415	
10	2,0	41,0	9,2	80	84	124	10	3	10420		10420		10420		10420	
10	3,0	41,0	9,2	80	84	124	10	3	10430		10430		10430		10430	
12	0,3	49,0	11,0	96	100	145	12	3	12403		12403		12403		12403	
12	0,5	49,0	11,0	96	100	145	12	3	12405		12405		12405		12405	
12	1,0	49,0	11,0	96	100	145	12	3	12410		12410		12410		12410	
12	1,5	49,0	11,0	96	100	145	12	3	12415		12415		12415		12415	
12	2,0	49,0	11,0	96	100	145	12	3	12420		12420		12420		12420	
12	3,0	49,0	11,0	96	100	145	12	3	12430		12430		12430		12430	
12	4,0	49,0	11,0	96	100	145	12	3	12440		12440		12440		12440	
16	0,3	65,0	15,0	128	132	180	16	3					16403		16403	
16	0,5	65,0	15,0	128	132	180	16	3					16405		16405	
16	1,0	65,0	15,0	128	132	180	16	3					16410		16410	

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

Continued on next page

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



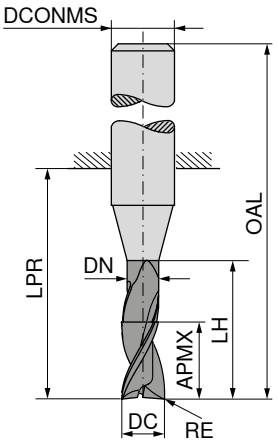

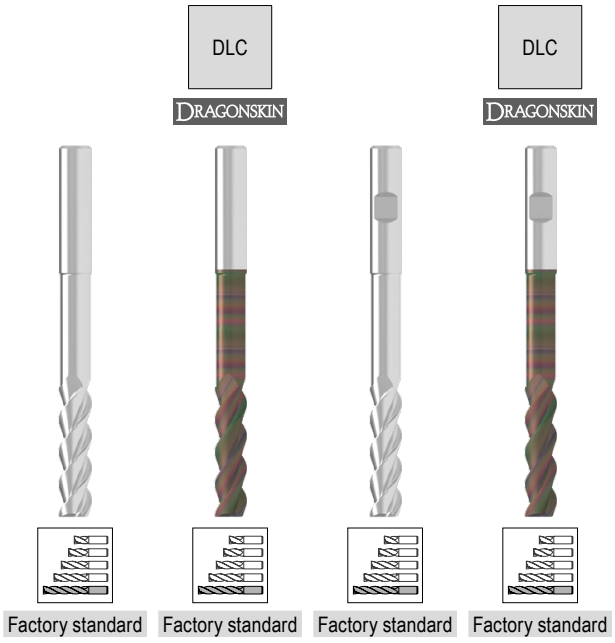

									Factory standard		Factory standard		Factory standard		Factory standard
									53 708 ...		53 710 ...		53 709 ...		53 711 ...
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP							
mm	mm	mm	mm	mm	mm	mm	mm								
16	1,5	65,0	15,0	128	132	180	16	3					**16415**		**16415**
16	2,0	65,0	15,0	128	132	180	16	3					**16420**		**16420**
16	3,0	65,0	15,0	128	132	180	16	3					**16430**		**16430**
16	4,0	65,0	15,0	128	132	180	16	3					**16440**		**16440**
20	0,5	82,0	19,0	160	164	214	20	3					**20405**		**20405**
20	1,0	82,0	19,0	160	164	214	20	3					**20410**		**20410**
20	1,5	82,0	19,0	160	164	214	20	3					**20415**		**20415**
20	2,0	82,0	19,0	160	164	214	20	3					**20420**		**20420**
20	3,0	82,0	19,0	160	164	214	20	3					**20430**		**20430**
20	4,0	82,0	19,0	160	164	214	20	3					**20440**		**20440**

P															
M															
K															
N									●		●		●		●
S															
H															
O															

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



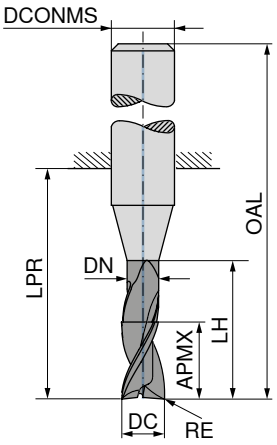

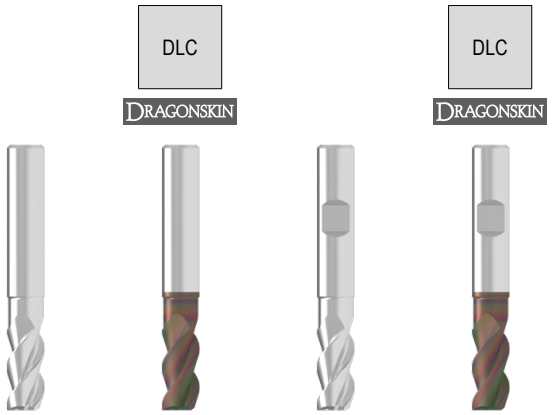

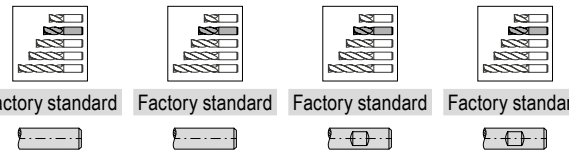

									Factory standard	Factory standard	Factory standard	Factory standard
									53 712 ...	53 714 ...	53 713 ...	53 715 ...
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
6	0,3	13	5,7	18	22	58	6	3	06103	06103	06103	06103
6	0,5	13	5,7	18	22	58	6	3	06105	06105	06105	06105
6	1,0	13	5,7	18	22	58	6	3	06110	06110	06110	06110
6	1,5	13	5,7	18	22	58	6	3	06115	06115	06115	06115
8	0,3	17	7,4	24	28	64	8	3	08103	08103	08103	08103
8	0,5	17	7,4	24	28	64	8	3	08105	08105	08105	08105
8	1,0	17	7,4	24	28	64	8	3	08110	08110	08110	08110
8	1,5	17	7,4	24	28	64	8	3	08115	08115	08115	08115
8	2,0	17	7,4	24	28	64	8	3	08120	08120	08120	08120
10	0,3	21	9,2	30	34	74	10	3	10103	10103	10103	10103
10	0,5	21	9,2	30	34	74	10	3	10105	10105	10105	10105
10	1,0	21	9,2	30	34	74	10	3	10110	10110	10110	10110
10	1,5	21	9,2	30	34	74	10	3	10115	10115	10115	10115
10	2,0	21	9,2	30	34	74	10	3	10120	10120	10120	10120
10	3,0	21	9,2	30	34	74	10	3	10130	10130	10130	10130
12	0,3	25	11,0	36	40	85	12	3	12103	12103	12103	12103
12	0,5	25	11,0	36	40	85	12	3	12105	12105	12105	12105
12	1,0	25	11,0	36	40	85	12	3	12110	12110	12110	12110
12	1,5	25	11,0	36	40	85	12	3	12115	12115	12115	12115
12	2,0	25	11,0	36	40	85	12	3	12120	12120	12120	12120
12	3,0	25	11,0	36	40	85	12	3	12130	12130	12130	12130
12	4,0	25	11,0	36	40	85	12	3	12140	12140	12140	12140
16	0,3	33	15,0	48	52	100	16	3			16103	16103
16	0,5	33	15,0	48	52	100	16	3			16105	16105
16	1,0	33	15,0	48	52	100	16	3			16110	16110
16	1,5	33	15,0	48	52	100	16	3			16115	16115
16	2,0	33	15,0	48	52	100	16	3			16120	16120
16	3,0	33	15,0	48	52	100	16	3			16130	16130
16	4,0	33	15,0	48	52	100	16	3			16140	16140
20	0,5	42	19,0	60	64	114	20	3			20105	20105
20	1,0	42	19,0	60	64	114	20	3			20110	20110
20	1,5	42	19,0	60	64	114	20	3			20115	20115
20	2,0	42	19,0	60	64	114	20	3			20120	20120
20	3,0	42	19,0	60	64	114	20	3			20130	20130
20	4,0	42	19,0	60	64	114	20	3			20140	20140
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



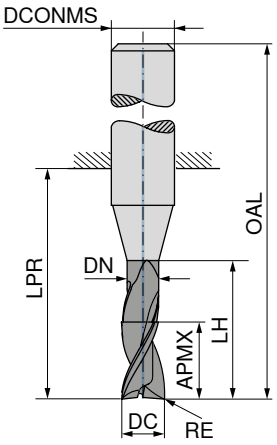

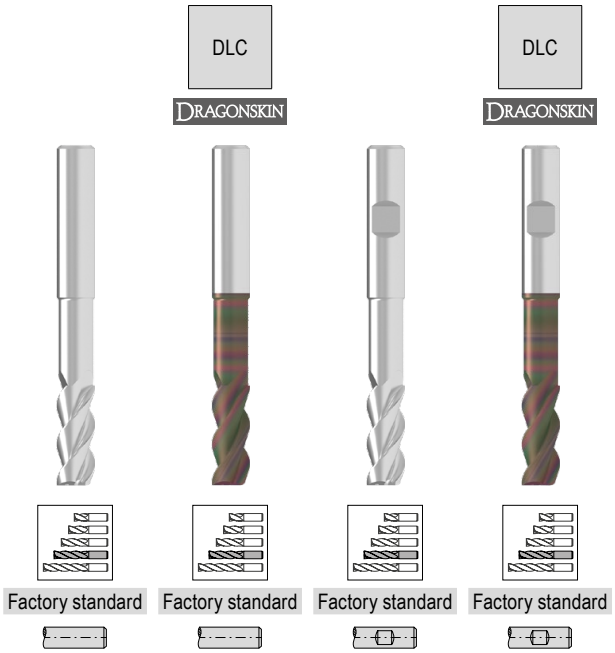

									Factory standard	Factory standard	Factory standard	Factory standard
									53 712 ...	53 714 ...	53 713 ...	53 715 ...
DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
6	0,3	16	5,7	30	34	70	6	3	06203	06203	06203	06203
6	0,5	16	5,7	30	34	70	6	3	06205	06205	06205	06205
6	1,0	16	5,7	30	34	70	6	3	06210	06210	06210	06210
6	1,5	16	5,7	30	34	70	6	3	06215	06215	06215	06215
8	0,3	21	7,4	40	44	80	8	3	08203	08203	08203	08203
8	0,5	21	7,4	40	44	80	8	3	08205	08205	08205	08205
8	1,0	21	7,4	40	44	80	8	3	08210	08210	08210	08210
8	1,5	21	7,4	40	44	80	8	3	08215	08215	08215	08215
8	2,0	21	7,4	40	44	80	8	3	08220	08220	08220	08220
10	0,3	26	9,2	50	54	94	10	3	10203	10203	10203	10203
10	0,5	26	9,2	50	54	94	10	3	10205	10205	10205	10205
10	1,0	26	9,2	50	54	94	10	3	10210	10210	10210	10210
10	1,5	26	9,2	50	54	94	10	3	10215	10215	10215	10215
10	2,0	26	9,2	50	54	94	10	3	10220	10220	10220	10220
10	3,0	26	9,2	50	54	94	10	3	10230	10230	10230	10230
12	0,3	31	11,0	60	64	109	12	3	12203	12203	12203	12203
12	0,5	31	11,0	60	64	109	12	3	12205	12205	12205	12205
12	1,0	31	11,0	60	64	109	12	3	12210	12210	12210	12210
12	1,5	31	11,0	60	64	109	12	3	12215	12215	12215	12215
12	2,0	31	11,0	60	64	109	12	3	12220	12220	12220	12220
12	3,0	31	11,0	60	64	109	12	3	12230	12230	12230	12230
12	4,0	31	11,0	60	64	109	12	3	12240	12240	12240	12240
16	0,3	41	15,0	80	84	132	16	3			16203	16203
16	0,5	41	15,0	80	84	132	16	3			16205	16205
16	1,0	41	15,0	80	84	132	16	3			16210	16210
16	1,5	41	15,0	80	84	132	16	3			16215	16215
16	2,0	41	15,0	80	84	132	16	3			16220	16220
16	3,0	41	15,0	80	84	132	16	3			16230	16230
16	4,0	41	15,0	80	84	132	16	3			16240	16240
20	0,5	52	19,0	100	104	154	20	3			20205	20205
20	1,0	52	19,0	100	104	154	20	3			20210	20210
20	1,5	52	19,0	100	104	154	20	3			20215	20215
20	2,0	52	19,0	100	104	154	20	3			20220	20220
20	3,0	52	19,0	100	104	154	20	3			20230	20230
20	4,0	52	19,0	100	104	154	20	3			20240	20240

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



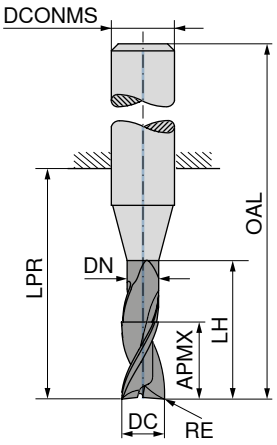

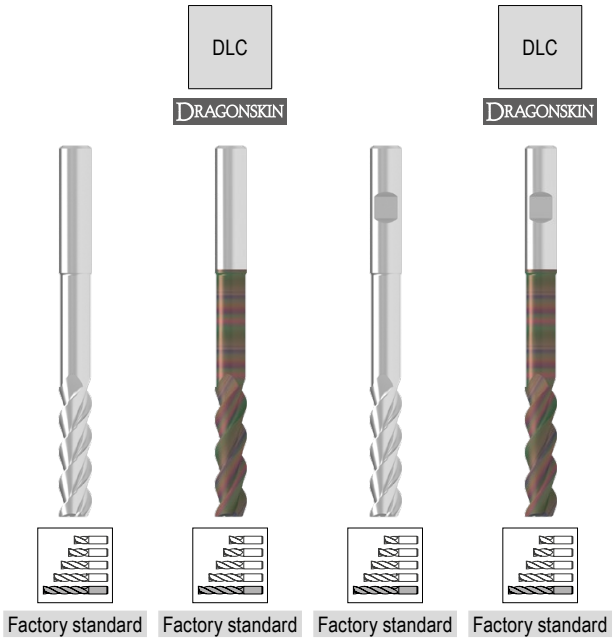

									Factory standard	Factory standard	Factory standard	Factory standard
									53 712 ...	53 714 ...	53 713 ...	53 715 ...
DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
6	0,3	25	5,7	48	52	88	6	3	06403	06403	06403	06403
6	0,5	25	5,7	48	52	88	6	3	06405	06405	06405	06405
6	1,0	25	5,7	48	52	88	6	3	06410	06410	06410	06410
6	1,5	25	5,7	48	52	88	6	3	06415	06415	06415	06415
8	0,3	33	7,4	64	68	104	8	3	08403	08403	08403	08403
8	0,5	33	7,4	64	68	104	8	3	08405	08405	08405	08405
8	1,0	33	7,4	64	68	104	8	3	08410	08410	08410	08410
8	1,5	33	7,4	64	68	104	8	3	08415	08415	08415	08415
8	2,0	33	7,4	64	68	104	8	3	08420	08420	08420	08420
10	0,3	41	9,2	80	84	124	10	3	10403	10403	10403	10403
10	0,5	41	9,2	80	84	124	10	3	10405	10405	10405	10405
10	1,0	41	9,2	80	84	124	10	3	10410	10410	10410	10410
10	1,5	41	9,2	80	84	124	10	3	10415	10415	10415	10415
10	2,0	41	9,2	80	84	124	10	3	10420	10420	10420	10420
10	3,0	41	9,2	80	84	124	10	3	10430	10430	10430	10430
12	0,3	49	11,0	96	100	145	12	3	12403	12403	12403	12403
12	0,5	49	11,0	96	100	145	12	3	12405	12405	12405	12405
12	1,0	49	11,0	96	100	145	12	3	12410	12410	12410	12410
12	1,5	49	11,0	96	100	145	12	3	12415	12415	12415	12415
12	2,0	49	11,0	96	100	145	12	3	12420	12420	12420	12420
12	3,0	49	11,0	96	100	145	12	3	12430	12430	12430	12430
12	4,0	49	11,0	96	100	145	12	3	12440	12440	12440	12440
16	0,3	65	15,0	128	132	180	16	3			16403	16403
16	0,5	65	15,0	128	132	180	16	3			16405	16405
16	1,0	65	15,0	128	132	180	16	3			16410	16410
16	1,5	65	15,0	128	132	180	16	3			16415	16415
16	2,0	65	15,0	128	132	180	16	3			16420	16420
16	3,0	65	15,0	128	132	180	16	3			16430	16430
16	4,0	65	15,0	128	132	180	16	3			16440	16440
20	0,5	82	19,0	160	164	214	20	3			20405	20405
20	1,0	82	19,0	160	164	214	20	3			20410	20410
20	1,5	82	19,0	160	164	214	20	3			20415	20415
20	2,0	82	19,0	160	164	214	20	3			20420	20420
20	3,0	82	19,0	160	164	214	20	3			20430	20430
20	4,0	82	19,0	160	164	214	20	3			20440	20440

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





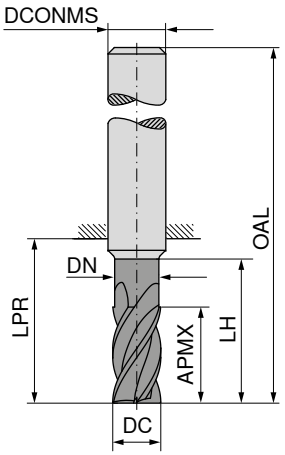

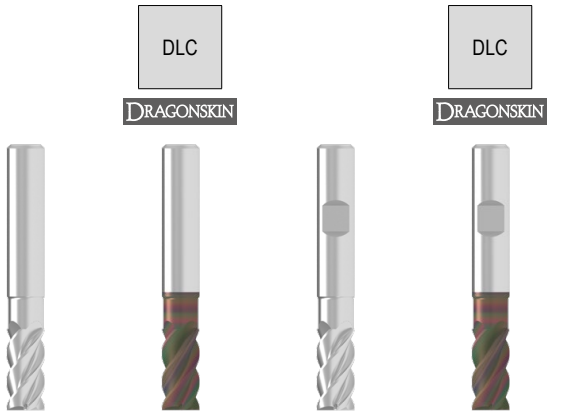

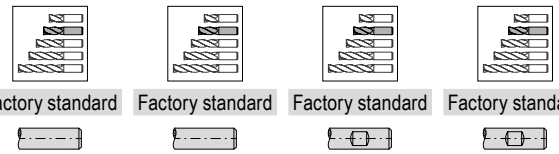

								53 704 ...	53 706 ...	53 705 ...	53 707 ...
								Factory standard	Factory standard	Factory standard	Factory standard
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm					
5	10,5	4,8	15	22	58	6	4	**05100**	**05100**	**05100**	**05100**
6	13,0	5,8	18	22	58	6	4	**06100**	**06100**	**06100**	**06100**
8	17,0	7,7	24	28	64	8	4	**08100**	**08100**	**08100**	**08100**
10	21,0	9,7	30	34	74	10	4	**10100**	**10100**	**10100**	**10100**
12	25,0	11,6	36	40	85	12	4	**12100**	**12100**	**12100**	**12100**
14	29,0	13,6	42	46	91	14	4			**14100**	**14100**
16	33,0	15,5	48	52	100	16	4			**16100**	**16100**
18	38,0	17,5	54	58	106	18	4			**18100**	**18100**
20	42,0	19,5	60	64	114	20	4			**20100**	**20100**
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





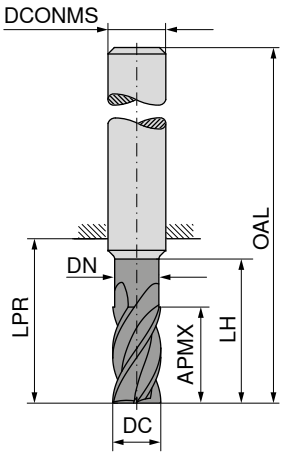

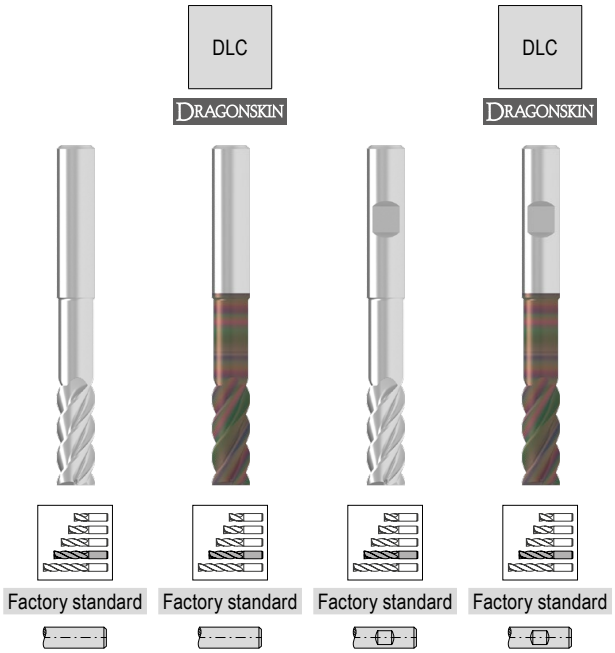

								53 704 ...	53 706 ...	53 705 ...	53 707 ...
								Factory standard	Factory standard	Factory standard	Factory standard
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm					
2	5,5	1,8	10	19	55	6	4	**02200**	**02200**	**02200**	**02200**
3	8,0	2,8	15	22	58	6	4	**03200**	**03200**	**03200**	**03200**
4	10,5	3,8	20	26	62	6	4	**04200**	**04200**	**04200**	**04200**
5	13,0	4,8	25	34	70	6	4	**05200**	**05200**	**05200**	**05200**
6	16,0	5,8	30	34	70	6	4	**06200**	**06200**	**06200**	**06200**
8	21,0	7,7	40	44	80	8	4	**08200**	**08200**	**08200**	**08200**
10	26,0	9,7	50	54	94	10	4	**10200**	**10200**	**10200**	**10200**
12	31,0	11,6	60	64	109	12	4	**12200**	**12200**	**12200**	**12200**
14	36,0	13,6	70	74	119	14	4			**14200**	**14200**
16	41,0	15,5	80	84	132	16	4			**16200**	**16200**
18	47,0	17,5	90	94	142	18	4			**18200**	**18200**
20	52,0	19,5	100	104	154	20	4			**20200**	**20200**
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes



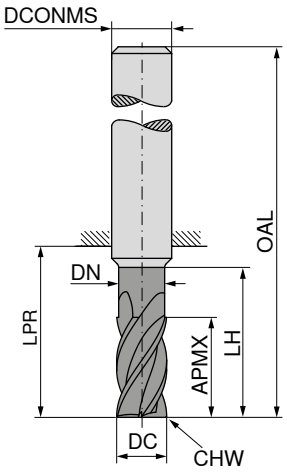

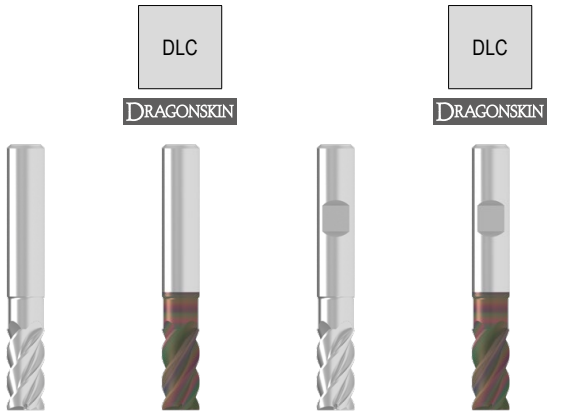

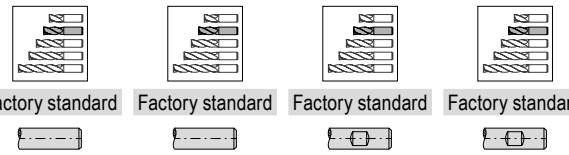

	Factory standard	Factory standard	Factory standard	Factory standard
	53 700 ...	53 702 ...	53 701 ...	53 703 ...

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP				
5	10,5	4,8	15	22	58	6	0,1	4	**05100**	**05100**	**05100**	**05100**
6	13,0	5,8	18	22	58	6	0,2	4	**06100**	**06100**	**06100**	**06100**
8	17,0	7,7	24	28	64	8	0,2	4	**08100**	**08100**	**08100**	**08100**
10	21,0	9,7	30	34	74	10	0,2	4	**10100**	**10100**	**10100**	**10100**
12	25,0	11,6	36	40	85	12	0,2	4	**12100**	**12100**	**12100**	**12100**
14	29,0	13,6	42	46	91	14	0,2	4			**14100**	**14100**
16	33,0	15,5	48	52	100	16	0,2	4			**16100**	**16100**
18	38,0	17,5	54	58	106	18	0,2	4			**18100**	**18100**
20	42,0	19,5	60	64	114	20	0,2	4			**20100**	**20100**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





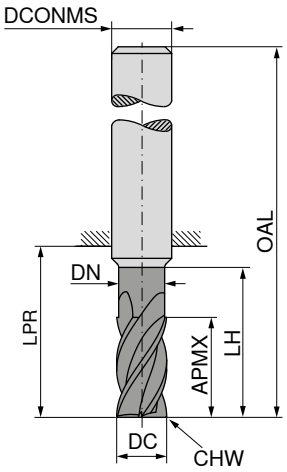

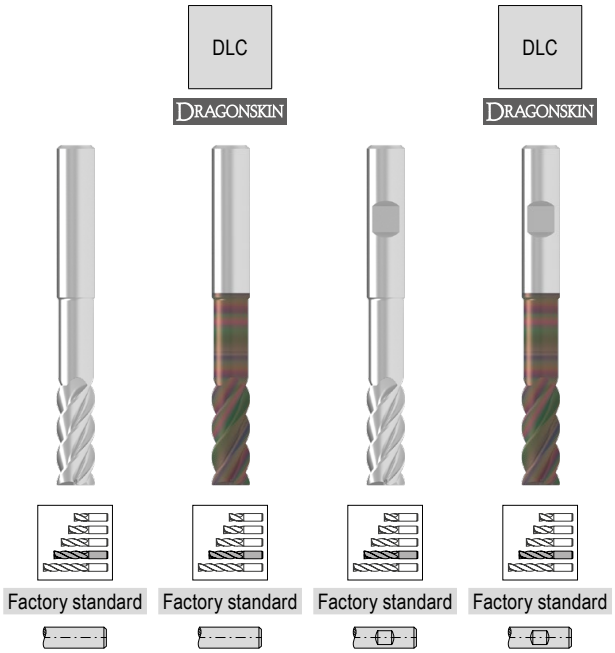

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 700 ...	53 702 ...	53 701 ...	53 703 ...
2	5,5	1,8	10	19	55	6	0,05	4	**02200**	**02200**	**02200**	**02200**
3	8,0	2,8	15	22	58	6	0,10	4	**03200**	**03200**	**03200**	**03200**
4	10,5	3,8	20	26	62	6	0,10	4	**04200**	**04200**	**04200**	**04200**
5	13,0	4,8	25	34	70	6	0,10	4	**05200**	**05200**	**05200**	**05200**
6	16,0	5,8	30	34	70	6	0,20	4	**06200**	**06200**	**06200**	**06200**
8	21,0	7,7	40	44	80	8	0,20	4	**08200**	**08200**	**08200**	**08200**
10	26,0	9,7	50	54	94	10	0,20	4	**10200**	**10200**	**10200**	**10200**
12	31,0	11,6	60	64	109	12	0,20	4	**12200**	**12200**	**12200**	**12200**
14	36,0	13,6	70	74	119	14	0,20	4			**14200**	**14200**
16	41,0	15,5	80	84	132	16	0,20	4			**16200**	**16200**
18	47,0	17,5	90	94	142	18	0,20	4			**18200**	**18200**
20	52,0	19,5	100	104	154	20	0,20	4			**20200**	**20200**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





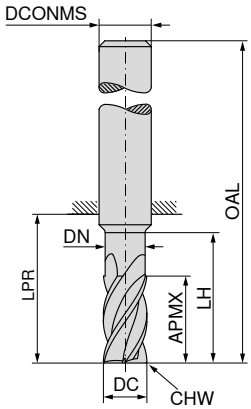

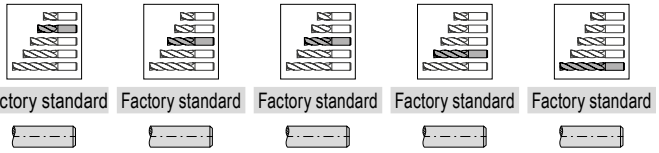

									Factory standard	Factory standard	Factory standard	Factory standard	Factory standard
									53 560 ...	53 561 ...	53 562 ...	53 563 ...	53 564 ...
DC h10	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP					
mm	mm	mm	mm	mm	mm	mm	mm						
3,0	8	2,7	13	21	57	6	0,1	4				030	
3,5	11	3,2	17	21	57	6	0,1	4				035	
4,0	11	3,7	17	21	57	6	0,1	4				040	
4,5	13	4,2	19	21	57	6	0,1	4				045	
5,0	13	4,7	19	21	57	6	0,1	4			050		
5,5	13	5,2	19	21	57	6	0,1	4			055		
6,0	10	5,7	42	44	80	6	0,2	4					060
6,0	13	5,7	19	21	57	6	0,2	4			060		
6,0	18	5,7	24	26	62	6	0,2	4				060	
6,5	21	6,1	25	27	63	8	0,2	4			065		
8,0	13	7,4	62	64	100	8	0,2	4					080
8,0	21	7,4	25	27	63	8	0,2	4		080			
8,0	24	7,4	30	32	68	8	0,2	4			080		
8,5	22	7,9	30	32	72	10	0,2	4			085		
10,0	16	9,2	58	60	100	10	0,2	4				100	
10,0	22	9,2	30	32	72	10	0,2	4		100			
10,0	30	9,2	38	40	80	10	0,2	4			100		
12,0	19	11,0	73	75	120	12	0,2	4					120
12,0	26	11,0	36	38	83	12	0,2	4		120			
12,0	36	11,0	46	48	93	12	0,2	4			120		
14,0	26	13,0	36	38	83	14	0,2	4	140				
16,0	25	15,0	100	102	150	16	0,2	4					160
16,0	36	15,0	42	44	92	16	0,2	4	160				
16,0	48	15,0	58	60	108	16	0,2	4			160		
18,0	36	17,0	42	44	92	18	0,2	4	180				
20,0	32	19,0	98	100	150	20	0,2	4				200	
20,0	41	19,0	52	54	104	20	0,2	4	200				
20,0	60	19,0	74	76	126	20	0,2	4			200		
25,0	52	24,0	62	65	121	25	0,3	4	250				
P													
M													
K													
N									●	●	●	●	●
S													
H													
O													

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals



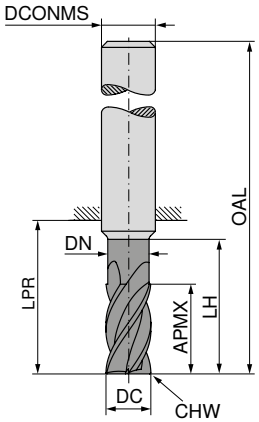

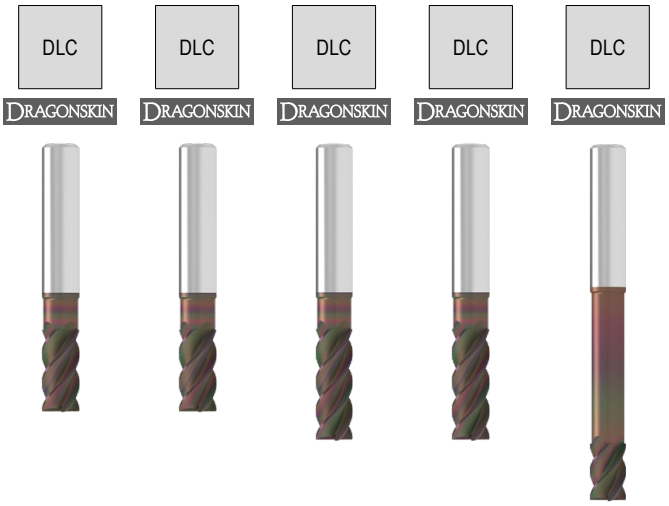

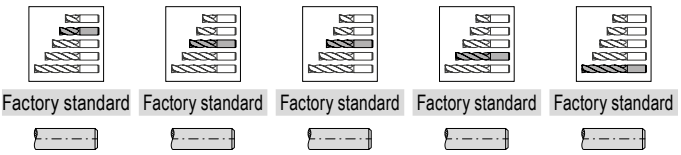

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 565 ...	53 566 ...	53 567 ...	53 568 ...	53 569 ...
3,0	8	2,7	13	21	57	6	0,1	4				030	
3,5	11	3,2	17	21	57	6	0,1	4				035	
4,0	11	3,7	17	21	57	6	0,1	4				040	
4,5	13	4,2	19	21	57	6	0,1	4				045	
5,0	13	4,7	19	21	57	6	0,1	4			050		
5,5	13	5,2	19	21	57	6	0,1	4			055		
6,0	10	5,7	42	44	80	6	0,2	4					060
6,0	13	5,7	19	21	57	6	0,2	4			060		
6,0	18	5,7	24	26	62	6	0,2	4				060	
6,5	21	6,1	25	27	63	8	0,2	4			065		
8,0	13	7,4	62	64	100	8	0,2	4					080
8,0	21	7,4	25	27	63	8	0,2	4		080			
8,0	24	7,2	30	32	68	8	0,2	4			080		
8,5	22	7,9	30	32	72	10	0,2	4			085		
10,0	16	9,2	58	60	100	10	0,2	4				100	
10,0	22	9,2	30	32	72	10	0,2	4		100			
10,0	30	9,2	38	40	80	10	0,2	4			100		
12,0	19	11,0	73	75	120	12	0,2	4					120
12,0	26	11,0	36	38	83	12	0,2	4		120			
12,0	36	11,0	46	48	93	12	0,2	4			120		
14,0	26	13,0	36	38	83	14	0,2	4	140				
16,0	25	15,0	100	102	150	16	0,2	4					160
16,0	36	15,0	42	44	92	16	0,2	4	160				
16,0	48	15,0	58	60	108	16	0,2	4			160		
18,0	36	17,0	42	44	92	18	0,2	4	180				
20,0	32	19,0	98	100	150	20	0,2	4				200	
20,0	41	19,0	52	54	104	20	0,2	4	200				
20,0	60	19,0	74	76	126	20	0,2	4			200		
25,0	52	24,0	62	65	121	25	0,3	4	250				
P													
M													
K													
N									●	●	●	●	●
S													
H													
O													

→ v_c/f_z Page 414+415

AluLine – Roughing-Finishing Cutter

The specialist for machining non-ferrous metals

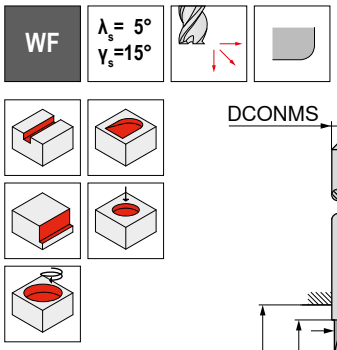

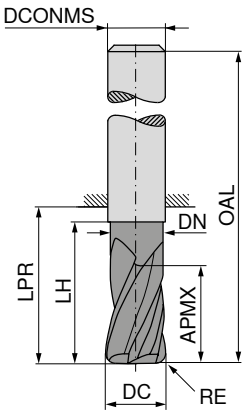

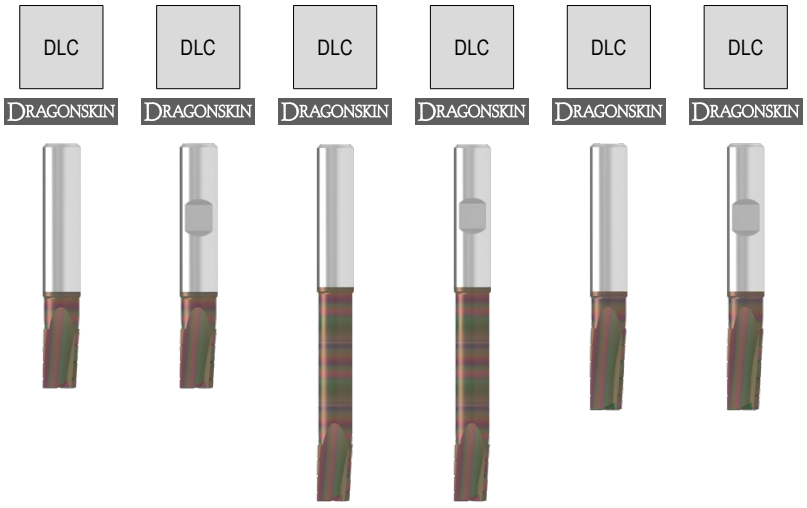



DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 582 ...	53 583 ...	53 582 ...	53 583 ...	53 582 ...	53 583 ...
3	0,10	5	2,7	18	44	80	6	3				03301		03301		
4	0,10	7	3,7	24	44	80	6	3				04301		04301		
5	0,15	8	4,7	16	18	54	6	3	05101	05101						
5	0,15	8	4,7	30	44	80	6	3				05301		05301		
5	0,15	13	4,7	18	21	57	6	3					05201		05201	
6	0,20	10	5,7	17	18	54	6	3	06102	06102						
6	0,20	10	5,7	42	44	80	6	3				06302		06302		
6	0,20	13	5,7	18	21	57	6	3					06202		06202	
8	0,25	13	7,4	20	22	58	8	3	08103	08103						
8	0,25	13	7,4	62	64	100	8	3				08303		08303		
8	0,25	21	7,4	25	27	63	8	3					08203		08203	
10	0,30	16	9,2	24	26	66	10	3	10103	10103						
10	0,30	16	9,2	58	60	100	10	3				10303		10303		
10	0,30	22	9,2	30	32	72	10	3					10203		10203	
12	0,35	19	11,0	26	28	73	12	3	12104	12104						
12	0,35	19	11,0	73	75	120	12	3				12304		12304		
12	0,35	26	11,0	36	38	83	12	3					12204		12204	
16	0,50	25	15,0	32	34	82	16	3		16105						
16	0,50	25	15,0	100	102	150	16	3				16305				
16	0,50	36	15,0	42	44	92	16	3							16205	
20	0,60	32	19,0	40	42	92	20	3		20106						
20	0,60	32	19,0	100	100	150	20	3				20306				
20	0,60	41	19,0	52	54	104	20	3							20206	

P							
M							
K							
N	●	●	●	●	●	●	
S							
H							
O							

→ v_c/f_z Page 416+417

AluLine – Rough milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

WR | λ_s=38° 40° 43° γ_s=10° | HPC



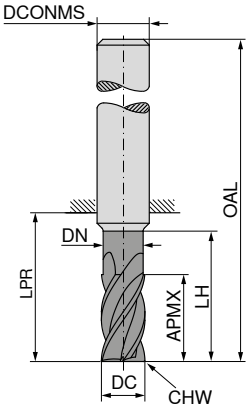

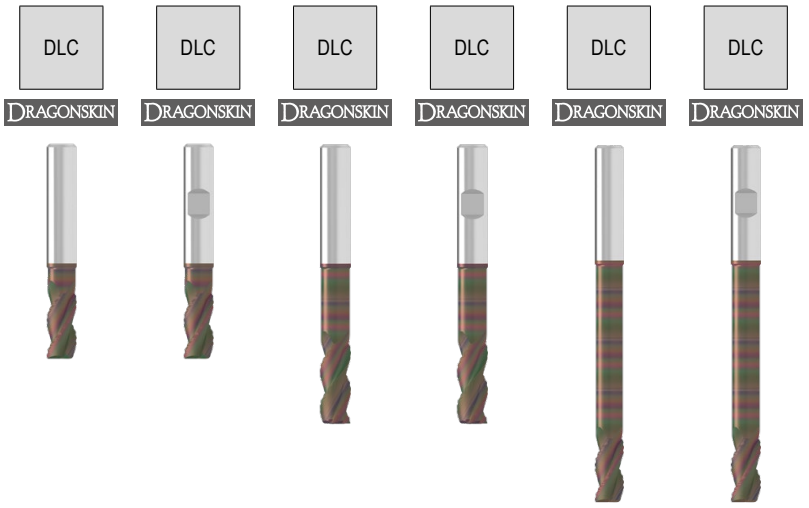



Factory standard



DC $_{d11}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	53 578 ...	53 579 ...	53 578 ...	53 579 ...	53 578 ...	53 579 ...
6	13	5,8	18	22	58	6	0,4	3	**06100**	**06100**				
6	16	5,8	30	34	70	6	0,4	3			**06200**	**06200**		
6	13	5,8	48	52	88	6	0,4	3					**06400**	**06400**
8	17	7,7	24	28	64	8	0,4	3	**08100**	**08100**				
8	21	7,7	40	44	80	8	0,4	3			**08200**	**08200**		
8	17	7,7	65	68	104	8	0,4	3					**08400**	**08400**
10	21	9,7	30	34	74	10	0,4	3	**10100**	**10100**				
10	26	9,7	50	54	94	10	0,4	3			**10200**	**10200**		
10	21	9,7	80	84	124	10	0,4	3					**10400**	**10400**
12	25	11,6	36	40	85	12	0,4	3	**12100**	**12100**				
12	31	11,6	60	64	109	12	0,4	3			**12200**	**12200**		
12	25	11,6	96	100	145	12	0,4	3					**12400**	**12400**
16	33	15,5	48	52	100	16	0,4	3		**16100**				
16	41	15,5	80	84	132	16	0,4	3				**16200**		
16	33	15,5	128	132	180	16	0,4	3						**16400**
20	42	19,5	60	64	114	20	0,4	3		**20100**				
20	52	19,5	100	104	154	20	0,4	3				**20200**		
20	42	19,5	160	164	214	20	0,4	3						**20400**
P														
M														
K														
N									●	●	●	●	●	●
S														
H														
O														

→ v_c/f_z Page 414+415

AluLine – Rough milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

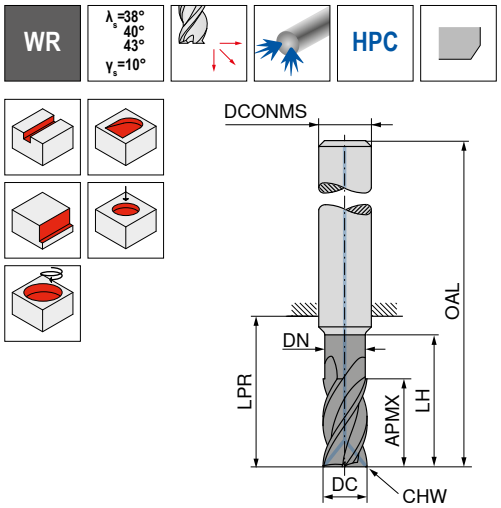

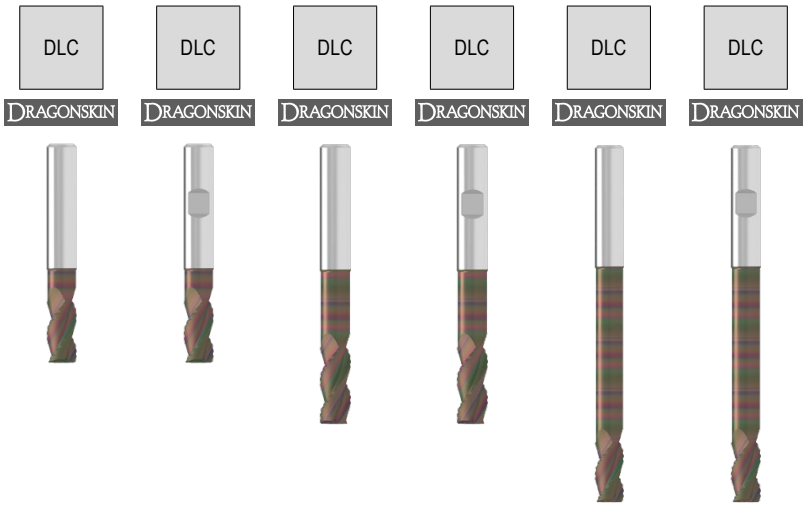

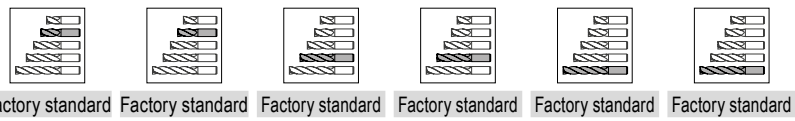

DC d11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 580 ...	53 581 ...	53 580 ...	53 581 ...	53 580 ...	53 581 ...
mm	mm	mm	mm	mm	mm	mm	mm							
6	13	5,8	18	22	58	6	0,4	3	06100	06100				
6	16	5,8	30	34	70	6	0,4	3			06200	06200		
6	13	5,8	48	52	88	6	0,4	3					06400	06400
8	17	7,7	24	28	64	8	0,4	3	08100	08100				
8	21	7,7	40	44	80	8	0,4	3			08200	08200		
8	17	7,7	64	68	104	8	0,4	3					08400	08400
10	21	9,7	30	34	74	10	0,4	3	10100	10100				
10	26	9,7	50	54	94	10	0,4	3			10200	10200		
10	21	9,7	80	84	124	10	0,4	3					10400	10400
12	25	11,6	36	40	85	12	0,4	3	12100	12100				
12	31	11,6	60	64	109	12	0,4	3			12200	12200		
12	25	11,6	96	100	145	12	0,4	3					12400	12400
16	33	15,5	48	52	100	16	0,4	3		16100				
16	41	15,5	80	84	132	16	0,4	3				16200		
16	33	15,5	128	132	180	16	0,4	3						16400
20	42	19,5	60	64	114	20	0,4	3		20100				
20	52	19,5	100	104	154	20	0,4	3				20200		
20	42	19,5	160	164	214	20	0,4	3						20400

P							
M							
K							
N	●	●	●	●	●	●	
S							
H							
O							

→ v_c/f_z Page 414+415

AluLine – High Accuracy Finish Milling Cutter

The specialist for machining non-ferrous metals

▲ max. taper of 0.003 mm for high precision and parallelism of vertical walls
▲ Tool with cutting edge correction

W | λ_s=44° γ_s=20° | HPC

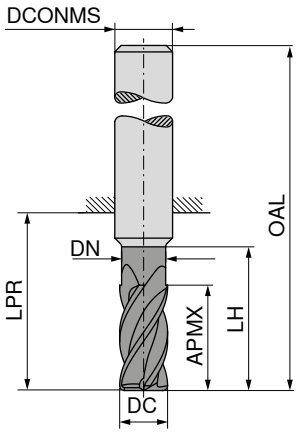

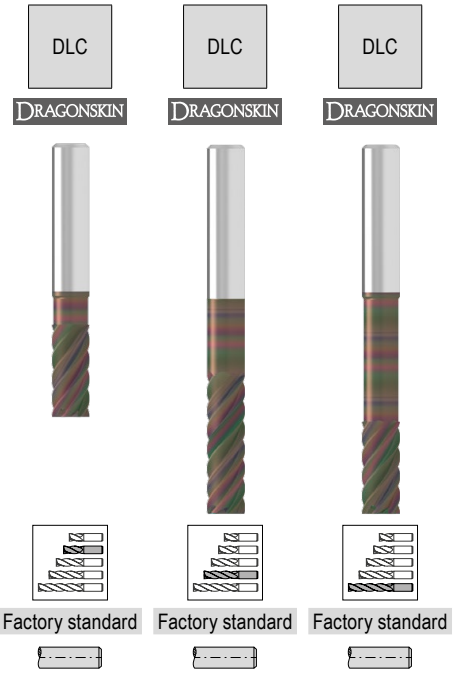

Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 639 ...	53 639 ...	53 639 ...
6	16	5,7	20	22	58	6	6	**06100**		
6	16	5,7	42	44	80	6	6			**06400**
8	19	7,4	26	28	64	8	6	**08100**		
8	19	7,4	62	64	100	8	6			**08400**
10	25	9,2	32	34	74	10	6	**10100**		
10	25	9,2	58	60	100	10	6			**10400**
12	30	11,0	37	39	84	12	6	**12100**		
12	30	11,0	73	75	120	12	6			**12400**
12	45			75	120	12	6		**12200**	
16	40	15,0	44	45	93	16	6	**16100**		
16	40	15,0	100	102	150	16	6			**16400**
16	65			102	150	16	6		**16200**	
20	50	19,0	53	54	104	20	6	**20100**		
20	50	19,0	98	100	150	20	6			**20400**
20	75			100	150	20	6		**20200**	

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 416+417

AluLine – Ball Nosed Cutter

The specialist for machining non-ferrous metals



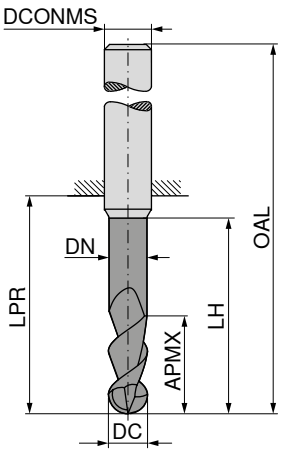

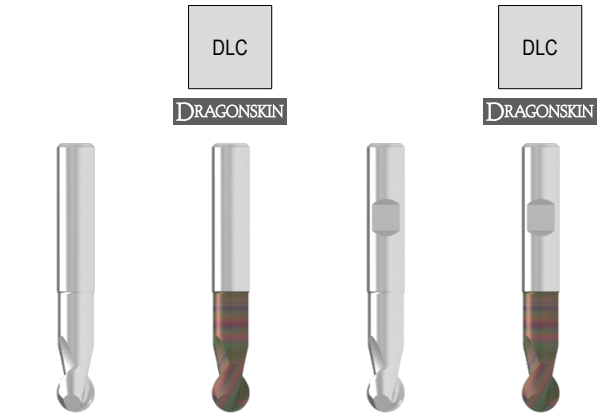



								Factory standard	Factory standard	Factory standard	Factory standard
								53 607 ...	**53 608 ...**	**53 609 ...**	**53 610 ...**
DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm					
3	6	2,7	16	22	50	3	2	**03100**	**03100**		
4	7	3,7	17	26	54	4	2	**04100**	**04100**		
5	8	4,6	18	26	54	5	2	**05100**	**05100**		
6	10	5,5	21	26	62	6	2	**06100**	**06100**	**06100**	**06100**
8	12	7,5	27	31	67	8	2	**08100**	**08100**	**08100**	**08100**
10	13	9,4	32	34	74	10	2	**10100**	**10100**	**10100**	**10100**
12	16	11,4	38	48	93	12	2	**12100**	**12100**	**12100**	**12100**
14	16	13,2	38	55	100	14	2	**14100**	**14100**	**14100**	**14100**
16	20	15,0	44	52	100	16	2	**16100**	**16100**	**16100**	**16100**
20	25	19,0	50	54	104	20	2	**20100**	**20100**	**20100**	**20100**

P				
M				
K				
N	●	●	●	●
S				
H				
O	○	○	○	○

→ v_c/f_z Page 416+417

AluLine – Ball Nosed Cutter

The specialist for machining non-ferrous metals

W | λ_s=45° γ_s=13°

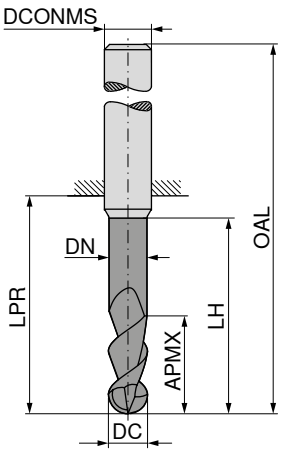

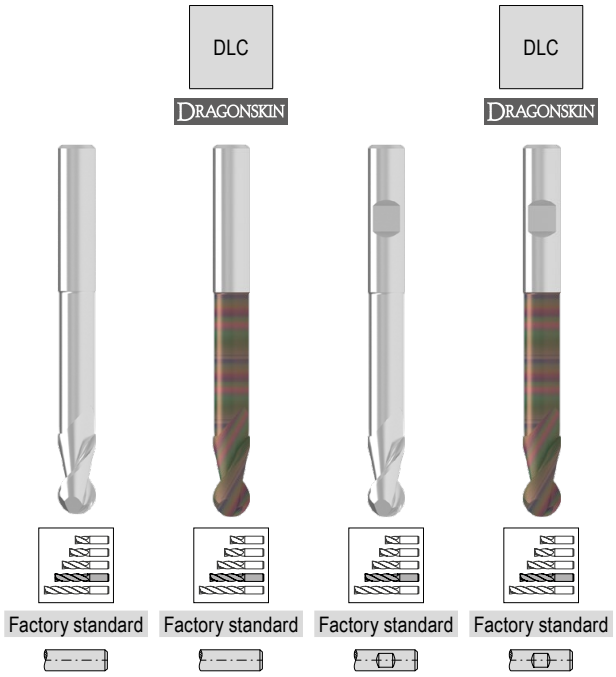

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 607 ...	53 608 ...	53 609 ...	53 610 ...
3	10	2,7	32	47	75	3	2	**03200**	**03200**		
4	13	3,7	36	47	75	4	2	**04200**	**04200**		
5	15	4,6	40	47	75	5	2	**05200**	**05200**		
6	16	5,5	44	64	100	6	2	**06200**	**06200**	**06200**	**06200**
8	22	7,5	54	64	100	8	2	**08200**	**08200**	**08200**	**08200**
10	25	9,4	60	61	101	10	2	**10200**	**10200**	**10200**	**10200**
12	26	11,4	60	63	108	12	2	**12200**	**12200**	**12200**	**12200**
14	26	13,2	60	65	110	14	2	**14200**	**14200**	**14200**	**14200**
16	30	15,0	92	102	150	16	2	**16200**	**16200**	**16200**	**16200**
20	40	19,0	92	100	150	20	2	**20200**	**20200**	**20200**	**20200**

P				
M				
K				
N	●	●	●	●
S				
H				
O	○	○	○	○

→ v_c/f_z Page 416+417

AluLine – Ball Nosed Cutter

The specialist for machining non-ferrous metals

W | λ_s=45° γ_s=13°

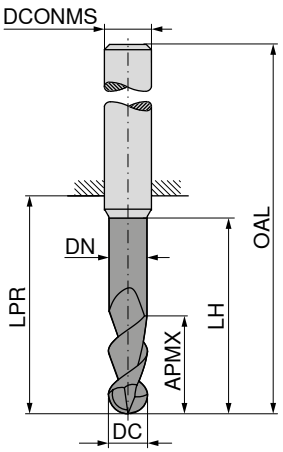

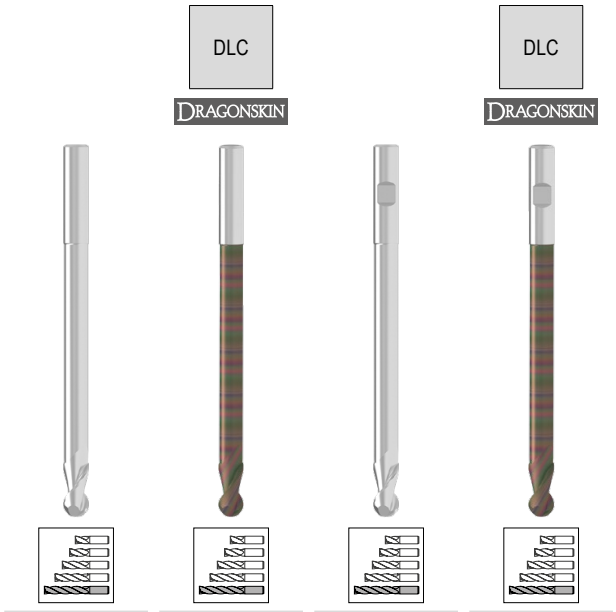

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 607 ...	53 608 ...	53 609 ...	53 610 ...
3	10	2,7	82	97	125	3	2	**03400**	**03400**		
4	13	3,7	86	97	125	4	2	**04400**	**04400**		
6	16	5,5	94	114	150	6	2	**06400**	**06400**	**06400**	**06400**
8	22	7,5	104	114	150	8	2	**08400**	**08400**	**08400**	**08400**
10	25	9,4	110	111	151	10	2	**10400**	**10400**	**10400**	**10400**
12	26	11,4	105	106	151	12	2	**12400**	**12400**	**12400**	**12400**
16	30	15,0	192	202	250	16	2	**16400**	**16400**	**16400**	**16400**
P											
M											
K											
N								●	●	●	●
S											
H											
O								○	○	○	○

→ v_c/f_z Page 416+417

AluLine – NC deburring cutter

The specialist for machining non-ferrous metals

▲ Point angle α = 60°

W

λ_s=0°
γ_s=8°



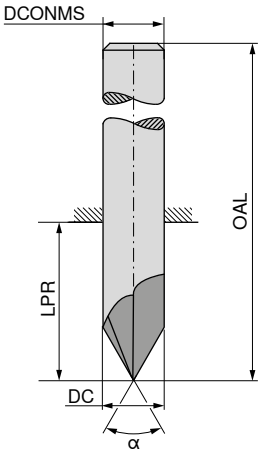

DLC
DRAGONSKIN

DLC
DRAGONSKIN

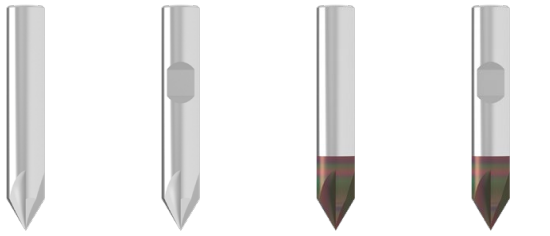

DC	OAL	LPR	DCONMS	ZEFP	α = 60° Factory standard	α = 60° Factory standard	α = 60° Factory standard	α = 60° Factory standard
mm	mm	mm	mm		53 666 ...	53 667 ...	53 662 ...	53 663 ...
4	50	22	4	4	**04000**		**04000**	
6	55	19	6	4	**06000**	**06000**	**06000**	**06000**
8	58	22	8	4	**08000**	**08000**	**08000**	**08000**
10	60	20	10	4	**10000**	**10000**	**10000**	**10000**
12	70	25	12	4	**12000**	**12000**	**12000**	**12000**
16	80	32	16	4	**16000**	**16000**	**16000**	**16000**

P				
M				
K				
N	●	●	●	●
S				
H				
O	●	●	●	●

→ v_c/f_z Page 419

AluLine – NC deburring cutter

The specialist for machining non-ferrous metals

▲ Point angle α = 90°

W

λ_s=0°
γ_s=8°



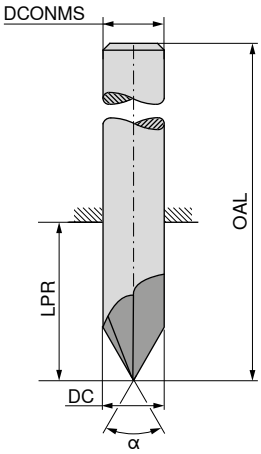

DLC
DRAGONSKIN

DLC
DRAGONSKIN

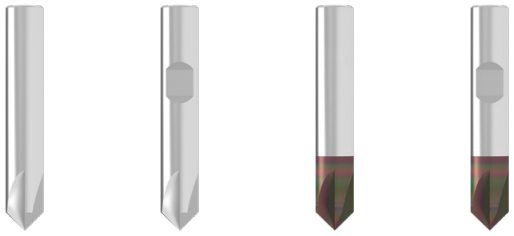

	α = 90° Factory standard	α = 90° Factory standard	α = 90° Factory standard	α = 90° Factory standard
	53 664 ...	53 665 ...	53 660 ...	53 661 ...
DC mm				
4	**04000**		**04000**	
6	**06000**	**06000**	**06000**	**06000**
8	**08000**	**08000**	**08000**	**08000**
10	**10000**	**10000**	**10000**	**10000**
12	**12000**	**12000**	**12000**	**12000**
16	**16000**	**16000**	**16000**	**16000**
OAL mm	50	55	58	60	70	80
LPR mm	22	19	22	20	25	32
DCONMS mm	4	6	8	10	12	16
ZEFP	4	4	4	4	4	4
P				
M				
K				
N	●	●	●	●
S				
H				
O	●	●	●	●

→ v_c/f_z Page 419

14

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 45°



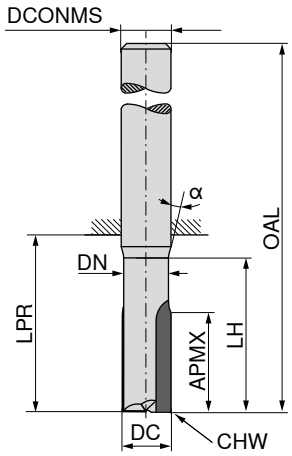

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 010 ...	50 010 ...
3	6	2,8	11	21	57	6	0,1	2	03100	
3	6	2,8	22	64	100	6	0,1	2		03300
4	8	3,5	13	21	57	6	0,1	2	04100	
4	8	3,5	26	64	100	6	0,1	2		04300
5	10	4,4	15	21	57	6	0,1	2	05100	
5	10	4,4	30	64	100	6	0,1	2		05300
6	12	5,4	19	21	57	6	0,1	2	06100	
6	12	5,4	38	64	100	6	0,1	2		06300
8	16	7,2	26	28	64	8	0,1	2	08100	
8	16	7,2	52	64	100	8	0,1	2		08300
10	20	9,0	31	34	74	10	0,1	2	10100	
10	20	9,0	60	60	100	10	0,1	2		10300
P										
M										
K										
N									●	●
S										
H										
O									●	●

→ v_c/f_z Page 412+413

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



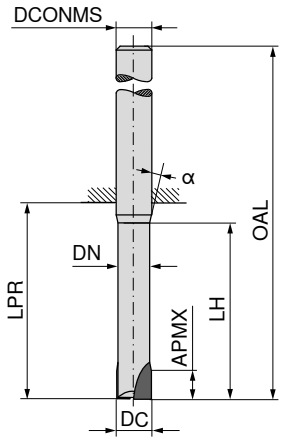



50 011 ...

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
2	2,0	1,7	6	39	75	6	1	**02100**
2	2,0	1,7	10	39	75	6	1	**02300**
2	2,0	1,7	14	39	75	6	1	**02200**
3	2,5	2,5	9	39	75	6	2	**03100**
3	2,5	2,5	15	39	75	6	2	**03300**
3	2,5	2,5	21	39	75	6	2	**03200**
4	2,5	3,5	12	39	75	6	2	**04100**
4	2,5	3,5	20	39	75	6	2	**04300**
4	2,5	3,5	28	39	75	6	2	**04200**
5	3,0	4,4	15	39	75	6	2	**05100**
5	3,0	4,4	25	39	75	6	2	**05300**
5	3,0	4,4	35	39	75	6	2	**05200**
6	6,0	5,4	18	64	100	6	2	**06100**
6	6,0	5,4	30	64	100	6	2	**06300**
6	6,0	5,4	42	64	100	6	2	**06200**
8	7,0	7,2	24	64	100	8	2	**08100**
8	7,0	7,2	40	64	100	8	2	**08300**
10	8,0	9,0	30	60	100	10	2	**10100**
10	8,0	9,0	50	60	100	10	2	**10300**
12	9,0	11,0	36	60	105	12	2	**12100**
12	9,0	11,0	58	60	105	12	2	**12300**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

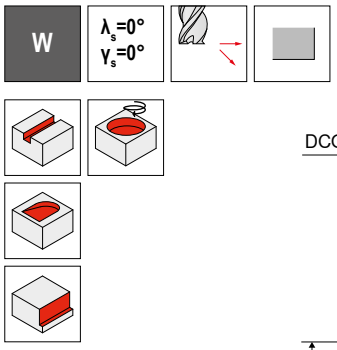

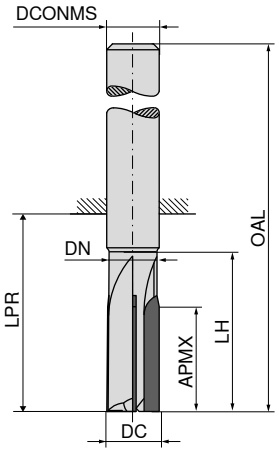

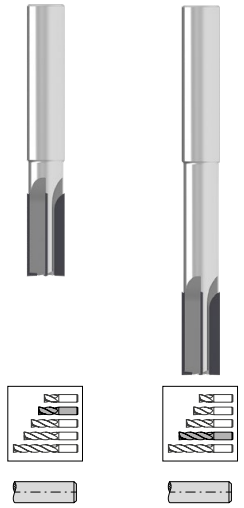

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 013 ...	50 013 ...
6	12	5,4	19,0	21	57	6	4	06100	
6	12	5,4	38,0	64	100	6	4		06200
8	16	7,2	26,0	28	64	8	4	08100	
8	16	7,2	52,0	64	100	8	4		08200
10	20	9,0	31,0	34	74	10	4	10100	
10	20	9,0	62,0	60	100	10	4		10200
12	24	11,0	36,5	39	84	12	4	12100	
12	24	11,0	73,0	70	115	12	4		12200
16	32	15,0	44,0	45	93	16	4	16100	
16	32	15,0	88,0	90	130	16	4		16200
20	38	19,0	52,5	54	104	20	4	20100	
20	38	19,0	105,0	110	160	20	4		20200
P									
M									
K									
N								●	●
S									
H									
O								●	●

→ v_c/f_z Page 412+413

PCD radius cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°

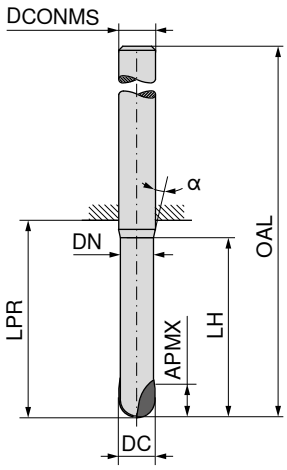

50 014 ...

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
2	2,0	1,7	6	39	75	6	1	**02100**
2	2,0	1,7	10	39	75	6	1	**02200**
2	2,0	1,7	14	39	75	6	1	**02300**
2	2,0	1,7	35	39	75	6	1	**02400**
3	2,5	2,5	9	39	75	6	2	**03100**
3	2,5	2,5	15	39	75	6	2	**03200**
3	2,5	2,5	21	39	75	6	2	**03300**
3	2,5	2,5	35	39	75	6	2	**03400**
4	2,5	3,5	12	39	75	6	2	**04100**
4	2,5	3,5	20	39	75	6	2	**04200**
4	2,5	3,5	28	39	75	6	2	**04300**
4	2,5	3,5	35	39	75	6	2	**04400**
5	3,0	4,4	15	39	75	6	2	**05100**
5	3,0	4,4	25	39	75	6	2	**05200**
5	3,0	4,4	35	39	75	6	2	**05400**
6	6,0	5,4	18	64	100	6	2	**06100**
6	6,0	5,4	30	64	100	6	2	**06200**
6	6,0	5,4	40	64	100	8	2	**06300**
6	6,0	5,4	42	64	100	6	2	**06400**
8	7,0	7,2	24	64	100	8	2	**08100**
8	7,0	7,2	40	64	100	8	2	**08300**
8	7,0	7,2	40	60	100	10	2	**08900**
10	8,0	9,0	30	60	100	10	2	**10100**
10	8,0	9,0	40	55	100	12	2	**10200**
10	8,0	9,0	50	60	100	10	2	**10300**
12	9,0	11,0	36	60	105	12	2	**12100**
12	9,0	11,0	40	55	100	16	2	**12200**
12	9,0	11,0	58	60	105	12	2	**12400**
16	11,0	15,0	45	82	130	16	2	**16200**
16	11,0	15,0	50	82	130	16	2	**16300**
20	13,0	19,0	60	110	160	20	2	**20400**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

14

PCD torus cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



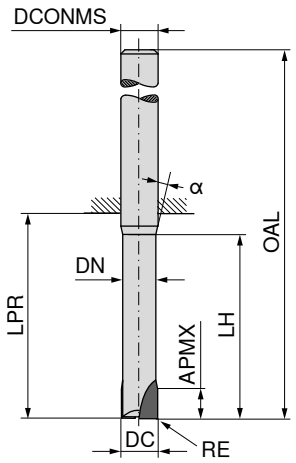

50 012 ...

DC h7 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
2	0,3	2,0	1,7	6	39	75	6	1	**02103**
2	0,3	2,0	1,7	10	39	75	6	1	**02203**
2	0,3	2,0	1,7	14	39	75	6	1	**02303**
2	0,3	2,0	1,7	35	39	75	6	1	**02403**
3	0,3	2,5	2,5	9	39	75	6	2	**03103**
3	0,3	2,5	2,5	15	39	75	6	2	**03203**
3	0,3	2,5	2,5	21	39	75	6	2	**03303**
3	0,3	2,5	2,5	35	39	75	6	2	**03403**
4	0,3	2,5	3,5	12	39	75	6	2	**04103**
4	0,3	2,5	3,5	20	39	75	6	2	**04203**
4	0,3	2,5	3,5	28	39	75	6	2	**04303**
4	0,3	2,5	3,5	35	39	75	6	2	**04403**
5	0,3	3,0	4,4	15	39	75	6	2	**05103**
5	0,3	3,0	4,4	25	39	75	6	2	**05203**
5	0,3	3,0	4,4	35	39	75	6	2	**05303**
6	0,3	6,0	5,4	18	64	100	6	2	**06103**
6	0,3	6,0	5,4	30	64	100	6	2	**06203**
6	0,3	6,0	5,4	42	64	100	6	2	**06403**
6	0,5	6,0	5,4	18	64	100	6	2	**06105**
6	0,5	6,0	5,4	30	64	100	6	2	**06205**
6	0,5	6,0	5,4	42	64	100	6	2	**06405**
6	1,0	6,0	5,4	18	64	100	6	2	**06110**
6	1,0	6,0	5,4	40	64	100	8	2	**06310**
6	1,0	6,0	5,4	42	64	100	6	2	**06410**
8	0,3	7,0	7,2	24	64	100	8	2	**08103**
8	0,3	7,0	7,2	40	64	100	8	2	**08203**
8	0,5	7,0	7,2	24	64	100	8	2	**08105**
8	0,5	7,0	7,2	40	64	100	8	2	**08205**
8	1,0	7,0	7,2	24	64	100	8	2	**08110**
8	1,0	7,0	7,2	40	64	100	8	2	**08210**
8	2,0	7,0	7,2	24	64	100	8	2	**08120**
8	2,0	7,0	7,2	40	60	100	10	2	**08920**
8	2,0	7,0	7,2	40	64	100	8	2	**08220**
10	0,5	8,0	9,0	30	60	100	10	2	**10105**
10	0,5	8,0	9,0	50	60	100	10	2	**10305**
10	1,0	8,0	9,0	30	60	100	10	2	**10110**
10	1,0	8,0	9,0	50	60	100	10	2	**10310**
10	1,5	8,0	9,0	30	60	100	10	2	**10115**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

Continued on next page

PCD torus cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



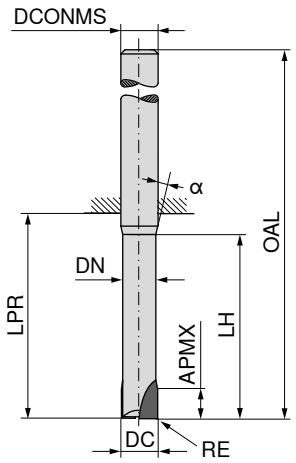

50 012 ...

DC h7 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
10	1,5	8,0	9,0	50	60	100	10	2	**10315**
10	2,0	8,0	9,0	30	60	100	10	2	**10120**
10	2,0	8,0	9,0	50	60	100	10	2	**10320**
10	3,0	8,0	9,0	30	60	100	10	2	**10130**
10	3,0	8,0	9,0	40	55	100	12	2	**10230**
10	3,0	8,0	9,0	50	60	100	10	2	**10330**
12	0,5	9,0	11,0	36	60	105	12	2	**12105**
12	0,5	9,0	11,0	58	60	105	12	2	**12305**
12	1,0	9,0	11,0	36	60	105	12	2	**12110**
12	1,0	9,0	11,0	58	60	105	12	2	**12310**
12	1,5	9,0	11,0	36	60	105	12	2	**12115**
12	1,5	9,0	11,0	58	60	105	12	2	**12315**
12	4,0	9,0	11,0	40	52	100	16	2	**12240**
16	3,0	11,0	15,0	45	82	130	16	2	**16130**
16	5,0	11,0	15,0	50	82	130	16	2	**16250**
20	6,0	13,0	19,0	60	140	160	20	2	**20260**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

W | λ_s=20° γ_s= 0° | HPC



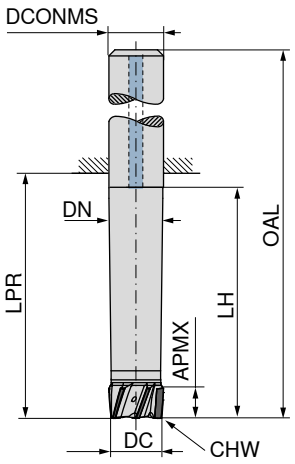



50 015 ...

DC mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS mm	CHW mm	ZEFP	KOMET no.	
10	5	9,6	25,0	27	67	10	0,2	4	38320001001000	**10200**
12	5	11,6	30,0	33	78	12	0,2	4	38320001001200	**12200**
16	10	15,6	40,0	43	91	16	0,2	5	38320001001600	**16200**
20	10	19,6	50,0	54	104	20	0,2	6	38320001002000	**20200**
25	10	24,6	62,5	68	124	25	0,2	8	38320001002500	**25200**
32	10	31,6	80,0	87	147	32	0,2	10	38320001003200	**32200**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD face and shoulder mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





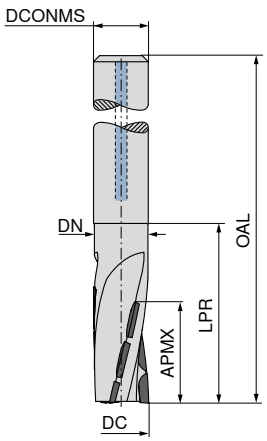



50 020 ...

DC h7 mm	APMX mm	DN mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	KOMET no.	
16	30	15,5	45	93	16	3	38170099001600	**01600**
20	30	19,5	50	100	20	3	38170099002000	**02000**
25	30	24,5	54	110	25	3	38170099002500	**02500**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

14

PCD drilling slot screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

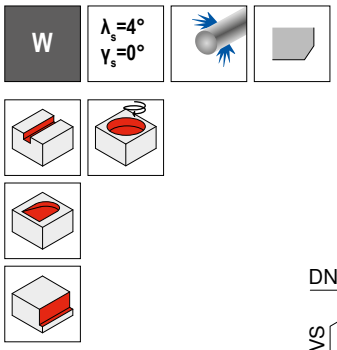

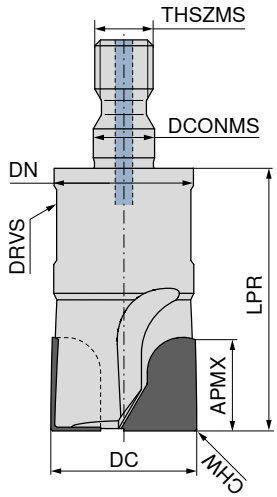



50 016 ...

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	CHW mm	DRVS mm	ZEFP	THSZMS	KOMET no.	
10	10	9,6	28	5,5	0,2	8	2	M5	37340099001000	**01000**
12	12	9,6	28	5,5	0,2	8	2	M5	37340099001200	**01200**
16	16	13,8	32	8,5	0,2	13	3	M8	37340099001600	**01600**
20	20	18,0	45	10,5	0,2	16	3	M10	37340099002000	**02000**
25	20	21,0	45	12,6	0,2	18	3	M12	37340099002500	**02500**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD face screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





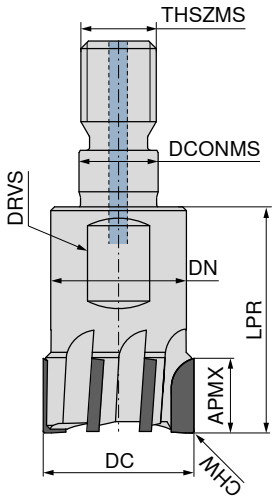

50 018 ...

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	CHW mm	DRVS mm	ZEFP	THSZMS	KOMET no.	
10	5	9,6	22	5,5	0,2	8	2	M5	37341099001000	**01000**
12	5	9,6	28	5,5	0,2	8	2	M5	37341099001200	**01200**
16	10	13,8	28	8,5	0,2	13	3	M8	37341099001600	**01600**
20	10	18,0	30	10,5	0,2	16	4	M10	37341099002000	**02000**
25	10	21,0	35	12,5	0,2	21	5	M12	37341099002500	**02500**
32	10	29,0	35	17,0	0,2	27	6	M16	37341099003200	**03200**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

14

PCD screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

W | λ_s=20° γ_s= 0° | HPC

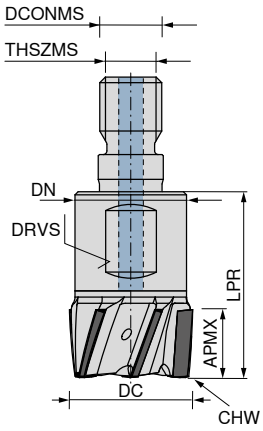

50 015 ...

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	CHW mm	DRVS mm	ZEFP	THSZMS	KOMET no.	
10	5	9,6	22	5,5	0,2	8	4	M5	37310001001000	**10100**
12	5	11,5	22	6,5	0,2	8	4	M6	37310099001200	**12100**
16	11	13,8	28	8,5	0,2	13	5	M8	37310001001600	**16100**
20	11	18,0	30	10,5	0,2	16	6	M10	37310001002000	**20100**
25	11	21,0	35	12,5	0,2	18	8	M12	37310001002500	**25100**
32	11	29,0	35	17,0	0,2	27	10	M16	37310001003200	**32100**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD radius screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics



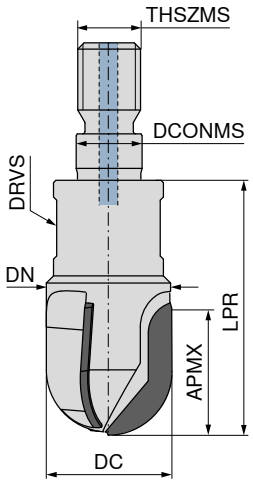

50 017 ...

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	DRVS mm	ZEFP	THSZMS	KOMET no.	
10	10	9,6	28	5,5	8	2	M5	37340098001000	**01000**
12	12	9,6	28	5,5	8	2	M5	37340098001200	**01200**
16	16	13,8	32	8,5	13	3	M8	37340098001600	**01600**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

14

PCD face mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





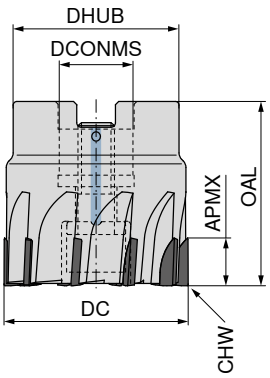

50 019 ...

DC mm	OAL mm	DHUB mm	APMX mm	DCONMS H6 mm	CHW mm	ZNF	KOMET no.	
40	40	36	10	16	0,2	10	37155099004000	**04000**
50	40	41	10	22	0,2	12	37155099005000	**05000**
63	40	48	10	22	0,2	14	37155099006300	**06300**
80	50	60	10	27	0,2	16	37155099008000	**08000**
100	50	78	10	32	0,2	18	37155099010000	**10000**
125	63	100	10	40	0,2	22	37155099012500	**12500**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412

Spare parts can be found in our online shop at cuttingtools.ceratizit.com.

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s=30° γ_s=14° | HPC



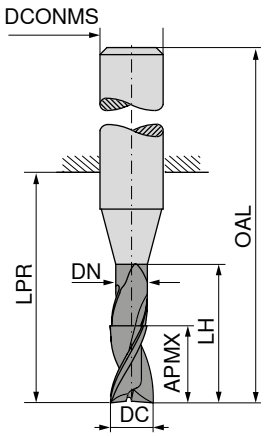

NEW

DPB72S

DRAGONSKIN

≈DIN 6527

50 558 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
3,0	8	2,8	15	21	57	6	2	**03200**
3,5	11	3,3	15	21	57	6	2	**03700**
4,0	11	3,8	15	21	57	6	2	**04200**
4,5	13	4,3	21	21	57	6	2	**04700**
5,0	13	4,8	21	21	57	6	2	**05200**
5,5	13	5,3	21	21	57	6	2	**05700**
6,0	13	5,8	21	21	57	6	2	**06200**
7,0	16	6,8	27	27	63	8	2	**07200**
8,0	19	7,8	27	27	63	8	2	**08200**
9,0	19	8,8	32	32	72	10	2	**09200**
10,0	22	9,8	32	32	72	10	2	**10200**
11,0	26	10,8	38	38	83	12	2	**11200**
12,0	26	11,8	38	38	83	12	2	**12200**
14,0	26	13,8	38	38	83	14	2	**14200**
15,0	32	14,7	44	44	92	16	2	**15200**
16,0	32	15,7	44	44	92	16	2	**16200**
17,0	32	16,7	44	44	92	18	2	**17200**
18,0	32	17,7	44	44	92	18	2	**18200**
19,0	38	18,7	54	54	104	20	2	**19200**
20,0	38	19,7	54	54	104	20	2	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 384+385

SilverLine – End milling cutter

The all-rounder for universal application

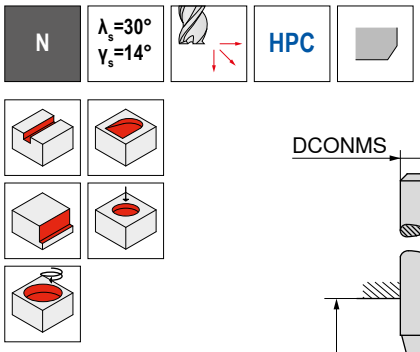

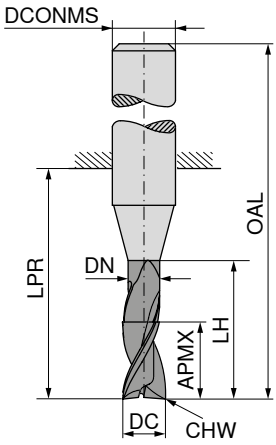

DPB72S

DRAGONSKIN

≈DIN 6527

50 958 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
3,0	8	2,8	15	21	57	6	0,1	2	**03200**
3,5	11	3,3	15	21	57	6	0,1	2	**03700**
4,0	11	3,8	15	21	57	6	0,1	2	**04200**
4,5	13	4,3	21	21	57	6	0,1	2	**04700**
5,0	13	4,8	21	21	57	6	0,1	2	**05200**
5,5	13	5,3	21	21	57	6	0,1	2	**05700**
6,0	13	5,8	21	21	57	6	0,1	2	**06200**
7,0	16	6,8	27	27	63	8	0,1	2	**07200**
8,0	19	7,8	27	27	63	8	0,1	2	**08200**
9,0	19	8,8	32	32	72	10	0,1	2	**09200**
10,0	22	9,8	32	32	72	10	0,1	2	**10200**
11,0	26	10,8	38	38	83	12	0,1	2	**11200**
12,0	26	11,8	38	38	83	12	0,1	2	**12200**
14,0	26	13,8	38	38	83	14	0,1	2	**14200**
15,0	32	14,7	44	44	92	16	0,1	2	**15200**
16,0	32	15,7	44	44	92	16	0,1	2	**16200**
17,0	32	16,7	44	44	92	18	0,1	2	**17200**
18,0	32	17,7	44	44	92	18	0,1	2	**18200**
19,0	38	18,7	54	54	104	20	0,1	2	**19200**
20,0	38	19,7	54	54	104	20	0,1	2	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 384+385

SilverLine – End milling cutter

The all-rounder for universal application

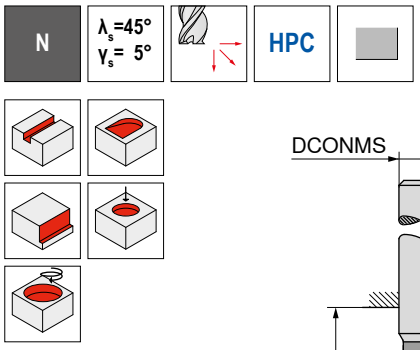

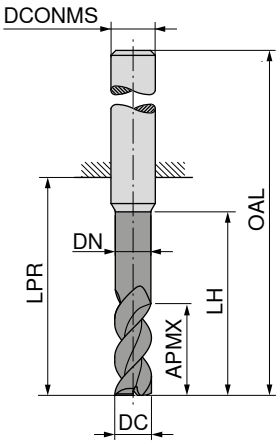

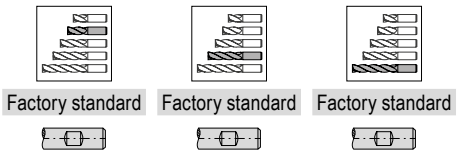

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Factory standard	Factory standard	Factory standard
								50 992 ...	50 992 ...	50 992 ...
3,0	8	2,9	15	21	57	6	3		03200	
3,5	11	3,4	16	21	57	6	3		03700	
4,0	8	3,9	15	18	54	6	3	04100		
4,0	11	3,9	16	21	57	6	3		04200	
4,0	16			26	62	6	3			04400
4,5	13	4,4	19	21	57	6	3		04700	
5,0	9	4,9	16	18	54	6	3	05100		
5,0	13	4,9	19	21	57	6	3		05200	
5,0	17			26	62	6	3			05400
5,5	13	5,4	19	21	57	6	3		05700	
6,0	10	5,9	17	18	54	6	3	06100		
6,0	13	5,9	19	21	57	6	3		06200	
6,0	18			26	62	6	3			06400
6,5	19	6,3	25	27	63	8	3		06700	
7,0	19	6,8	25	27	63	8	3		07200	
7,5	19	7,3	25	27	63	8	3		07700	
8,0	12		20	22	58	8	3	08100		
8,0	19	7,8	25	27	63	8	3		08200	
8,0	24			32	68	8	3			08400
8,5	22	8,2	30	32	72	10	3		08700	
9,0	22	8,7	30	32	72	10	3		09200	
9,5	22	9,2	30	32	72	10	3		09700	
10,0	14	9,7	24	26	66	10	3	10100		
10,0	22	9,7	30	32	72	10	3		10200	
10,0	30			40	80	10	3			10400
12,0	16	11,7	26	28	73	12	3	12100		
12,0	26	11,7	36	38	83	12	3		12200	
12,0	36			48	93	12	3			12400
14,0	18	13,7	28	30	75	14	3	14100		
14,0	26	13,7	36	38	83	14	3		14200	
14,0	42			54	99	14	3			14400
16,0	22	15,5	32	34	82	16	3	16100		
16,0	32	15,5	42	44	92	16	3		16200	
16,0	48			60	108	16	3			16400
18,0	24	17,5	34	36	84	18	3	18100		
18,0	32	17,5	42	44	92	18	3		18200	
18,0	54			66	114	18	3			18400
20,0	26	19,5	40	42	92	20	3	20100		
20,0	38	19,5	52	54	104	20	3		20200	
20,0	60			76	126	20	3			20400
P								●	●	●
M								●	●	●
K								●	●	●
N								○	○	○
S								●	●	●
H										
O										

→ v_c/f_z Page 386+387

SilverLine – End milling cutter

The all-rounder for universal application





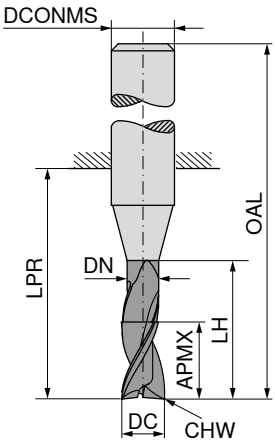

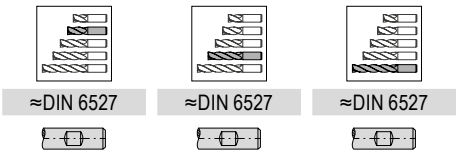

	≈DIN 6527	≈DIN 6527	≈DIN 6527
	50 966 ...	50 966 ...	50 966 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP			
3,0	8	2,9	15	21	57	6	0,1	3		03200	
3,5	11	3,4	16	21	57	6	0,1	3		03700	
4,0	8	3,9	15	18	54	6	0,1	3	04100		
4,0	11	3,9	16	21	57	6	0,1	3		04200	
4,0	16			26	62	6	0,1	3			04400
4,5	13	4,4	19	21	57	6	0,1	3		04700	
5,0	9	4,9	16	18	54	6	0,1	3	05100		
5,0	13	4,9	19	21	57	6	0,1	3		05200	
5,0	17			26	62	6	0,1	3			05400
5,5	13	5,4	19	21	57	6	0,1	3		05700	
6,0	10	5,9	17	18	54	6	0,2	3	06100		
6,0	13	5,9	19	21	57	6	0,2	3		06200	
6,0	18			26	62	6	0,2	3			06400
6,5	19	6,3	25	27	63	8	0,2	3		06700	
7,0	19	6,8	25	27	63	8	0,2	3		07200	
7,5	19	7,3	25	27	63	8	0,2	3		07700	
8,0	12	7,8	20	22	58	8	0,2	3	08100		
8,0	19	7,8	25	27	63	8	0,2	3		08200	
8,0	24			32	68	8	0,2	3			08400
8,5	22	8,2	30	32	72	10	0,2	3		08700	
9,0	22	8,7	30	32	72	10	0,2	3		09200	
9,5	22	9,2	30	32	72	10	0,2	3		09700	
10,0	14	9,7	24	26	66	10	0,2	3	10100		
10,0	22	9,7	30	32	72	10	0,2	3		10200	
10,0	30			40	80	10	0,2	3			10400
12,0	16	11,7	26	28	73	12	0,2	3	12100		
12,0	26	11,7	36	38	83	12	0,2	3		12200	
12,0	36			48	93	12	0,2	3			12400
14,0	18	13,7	28	30	75	14	0,2	3	14100		
14,0	26	13,7	36	38	83	14	0,2	3		14200	
14,0	42			54	99	14	0,2	3			14400
16,0	22	15,5	32	34	82	16	0,2	3	16100		
16,0	32	15,5	42	44	92	16	0,2	3		16200	
16,0	48			60	108	16	0,2	3			16400
18,0	24	17,5	34	36	84	18	0,2	3	18100		
18,0	32	17,5	42	44	92	18	0,2	3		18200	
18,0	54			66	114	18	0,2	3			18400
20,0	26	19,5	40	42	92	20	0,2	3	20100		
20,0	38	19,5	52	54	104	20	0,2	3		20200	
20,0	60			76	126	20	0,2	3			20400

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	●	●	●
H			
O			

→ v_c/f_z Page 386+387

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

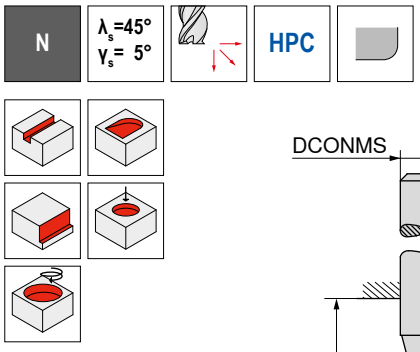

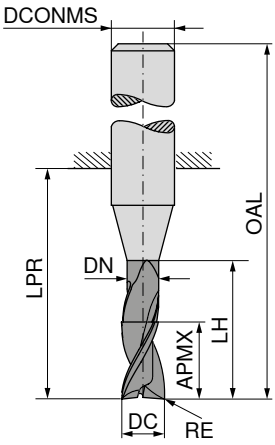

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 967 ...	50 967 ...	50 967 ...
4,0	0,5	8	3,9	15	18	54	6	3	**04105**		
4,0	0,5	11	3,9	16	21	57	6	3		**04205**	
4,0	0,5	16			26	62	6	3			**04405**
5,0	0,5	9	4,9	16	18	54	6	3	**05105**		
5,0	0,5	13	4,9	19	21	57	6	3		**05205**	
5,0	0,5	17			26	62	6	3			**05405**
6,0	0,5	10	5,9	17	18	54	6	3	**06105**		
6,0	0,5	13	5,9	19	21	57	6	3		**06205**	
6,0	0,5	18			26	62	6	3			**06405**
8,0	1,0	12	7,8	20	22	58	8	3	**08110**		
8,0	1,0	19	7,8	25	27	63	8	3		**08210**	
8,0	1,0	24			32	68	8	3			**08410**
10,0	1,0	14	9,7	24	26	66	10	3	**10110**		
10,0	1,0	22	9,7	30	32	72	10	3		**10210**	
10,0	1,0	30			40	80	10	3			**10410**
12,0	1,5	16	11,7	26	28	73	12	3	**12115**		
12,0	1,5	26	11,7	36	38	83	12	3		**12215**	
12,0	1,5	36			48	93	12	3			**12415**
16,0	2,0	22	15,5	32	34	82	16	3	**16120**		
16,0	2,0	32	15,5	42	44	92	16	3		**16220**	
16,0	2,0	48			60	108	16	3			**16420**
20,0	2,0	26	19,5	40	42	92	20	3	**20120**		
20,0	2,0	38	19,5	52	54	104	20	3		**20220**	
20,0	2,0	60			76	126	20	3			**20420**

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	●	●	●
H			
O			

→ v_c/f_z Page 386+387

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s = 35° 38° | γ_s = 9° | HPC



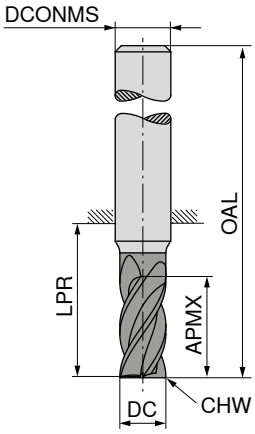

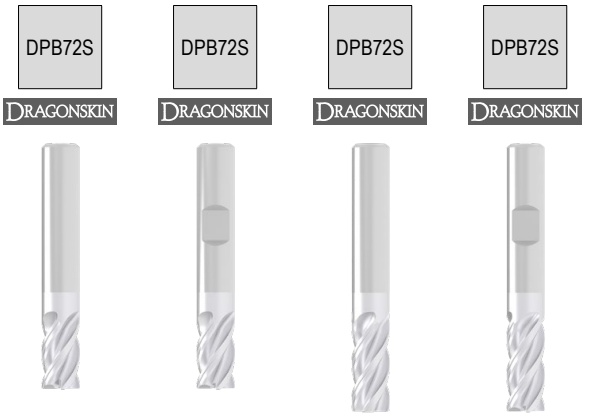



	≈DIN 6527	≈DIN 6527	≈DIN 6527	≈DIN 6527
	50 972 ...	50 973 ...	50 972 ...	50 973 ...

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP				
3,0	5	14	50	6	0,1	4	03100	03100		
3,0	8	21	57	6	0,1	4			03200	03200
3,5	8	18	54	6	0,1	4	03600	03600		
3,5	11	21	57	6	0,1	4			03700	03700
4,0	8	18	54	6	0,1	4	04100	04100		
4,0	11	21	57	6	0,1	4			04200	04200
4,5	9	18	54	6	0,1	4	04600	04600		
4,5	13	21	57	6	0,1	4			04700	04700
5,0	9	18	54	6	0,1	4	05100	05100		
5,0	13	21	57	6	0,1	4			05200	05200
5,5	10	18	54	6	0,1	4	05600	05600		
5,5	13	21	57	6	0,1	4			05700	05700
6,0	10	18	54	6	0,1	4	06100	06100		
6,0	13	21	57	6	0,1	4			06200	06200
7,0	12	22	58	8	0,2	4	07100	07100		
7,0	21	27	63	8	0,2	4			07200	07200
8,0	12	22	58	8	0,2	4	08100	08100		
8,0	21	27	63	8	0,2	4			08200	08200
9,0	14	26	66	10	0,2	4	09100	09100		
9,0	22	32	72	10	0,2	4			09200	09200
10,0	14	26	66	10	0,2	4	10100	10100		
10,0	22	32	72	10	0,2	4			10200	10200
11,0	16	28	73	12	0,3	4	11100	11100		
11,0	26	38	83	12	0,3	4			11200	11200
12,0	16	28	73	12	0,3	4	12100	12100		
12,0	26	38	83	12	0,3	4			12200	12200
14,0	16	28	73	14	0,3	4	14100	14100		
14,0	26	38	83	14	0,3	4			14200	14200
15,0	22	34	82	16	0,3	4	15100	15100		
15,0	36	44	92	16	0,3	4			15200	15200
16,0	22	34	82	16	0,3	4	16100	16100		
16,0	36	44	92	16	0,3	4			16200	16200
17,0	22	34	82	18	0,3	4	17100	17100		
17,0	36	44	92	18	0,3	4			17200	17200
18,0	22	34	82	18	0,3	4	18100	18100		
18,0	36	44	92	18	0,3	4			18200	18200
19,0	26	42	92	20	0,3	4	19100	19100		
19,0	41	54	104	20	0,3	4			19200	19200
20,0	26	42	92	20	0,3	4	20100	20100		
20,0	41	54	104	20	0,3	4			20200	20200

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

→ v_c/f_z Page 392+393

SilverLine – End milling cutter

The all-rounder for universal application

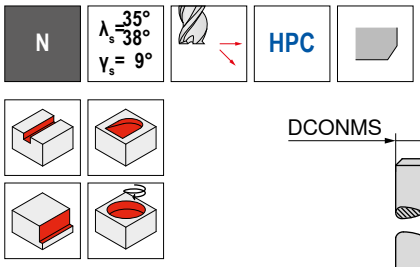

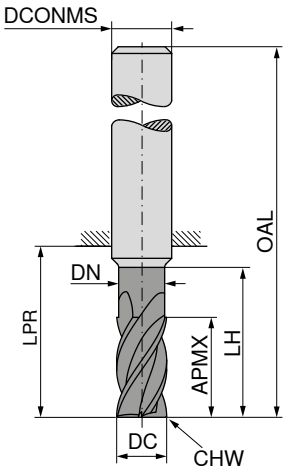

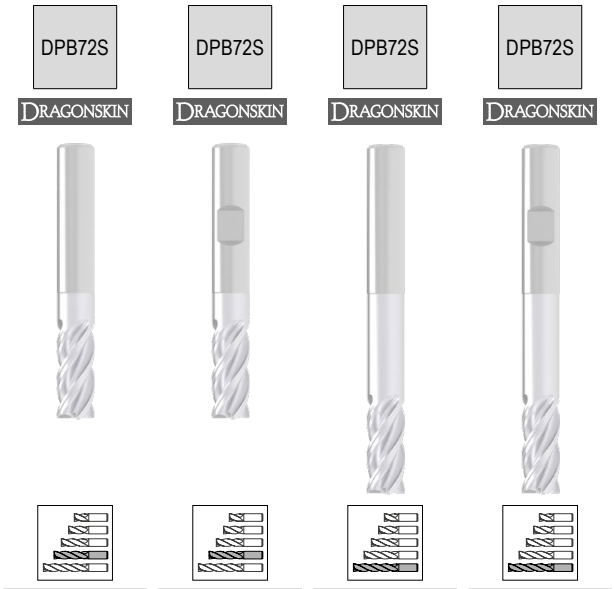

DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	DIN 6527	DIN 6527	DIN 6527	DIN 6527
mm	mm	mm	mm	mm	mm	mm	mm		50 974 ...	50 975 ...	50 974 ...	50 975 ...
3,0	6,5	2,8	9	19	55	6	0,1	4	03200	03200		
3,0	6,5	2,8	15	22	58	6	0,1	4			03400	03400
4,0	8,5	3,8	12	19	55	6	0,1	4	04200	04200		
4,0	8,5	3,8	20	26	62	6	0,1	4			04400	04400
5,0	10,5	4,8	15	22	58	6	0,1	4	05200	05200		
5,0	10,5	4,8	25	34	70	6	0,1	4			05400	05400
6,0	13,0	5,8	18	22	58	6	0,1	4	06200	06200		
6,0	13,0	5,8	30	34	70	6	0,1	4			06400	06400
8,0	17,0	7,7	24	28	64	8	0,2	4	08200	08200		
8,0	17,0	7,7	40	44	80	8	0,2	4			08400	08400
10,0	21,0	9,7	30	34	74	10	0,2	4	10200	10200		
10,0	21,0	9,7	50	54	94	10	0,2	4			10400	10400
12,0	25,0	11,6	36	40	85	12	0,3	4	12200	12200		
12,0	25,0	11,6	60	64	109	12	0,3	4			12400	12400
14,0	29,0	13,6	42	46	91	14	0,3	4	14200	14200		
14,0	29,0	13,6	70	74	119	14	0,3	4			14400	14400
16,0	33,0	15,5	48	52	100	16	0,3	4	16200	16200		
16,0	33,0	15,5	80	84	132	16	0,3	4			16400	16400
18,0	38,0	17,5	54	58	106	18	0,3	4	18200	18200		
18,0	38,0	17,5	90	94	142	18	0,3	4			18400	18400
20,0	42,0	19,5	60	64	114	20	0,3	4	20200	20200		
20,0	42,0	19,5	100	104	154	20	0,3	4			20400	20400
P									●	●	●	●
M									●	●	●	●
K									●	●	●	●
N									○	○	○	○
S									●	●	●	●
H												
O												

→ v_c/f_z Page 392–391

SilverLine – End milling cutter

The all-rounder for universal application

▲ Especially for high-volume milling





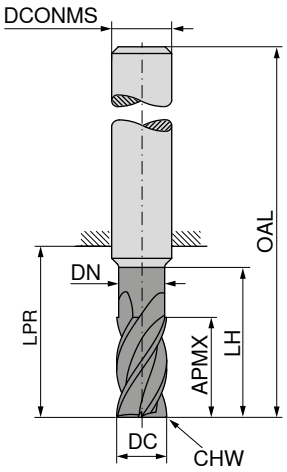

DIN 6527

50 976 ...

DIN 6527

50 977 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP		
3,0	8	2,8	13	21	57	6	0,1	4	**03200**	**03200**
4,0	11	3,8	17	21	57	6	0,1	4	**04200**	**04200**
5,0	13	4,8	19	21	57	6	0,1	4	**05200**	**05200**
6,0	13	5,8	19	21	57	6	0,1	4	**06200**	**06200**
8,0	21	7,7	25	27	63	8	0,2	4	**08200**	**08200**
10,0	22	9,7	30	32	72	10	0,2	4	**10200**	**10200**
12,0	26	11,6	36	38	83	12	0,3	4	**12200**	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	**14200**	**14200**
16,0	36	15,5	42	44	92	16	0,3	4	**16200**	**16200**
18,0	36	17,5	42	44	92	18	0,3	4	**18200**	**18200**
20,0	41	19,5	52	54	104	20	0,3	4	**20200**	**20200**

P	●	●
M	●	●
K	●	●
N	○	○
S		
H		
O		

→ v_c/f_z Page 388+389

SilverLine – End milling cutter

The all-rounder for universal application

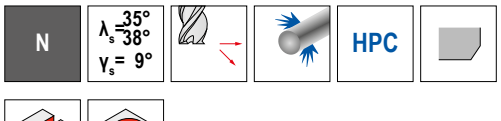



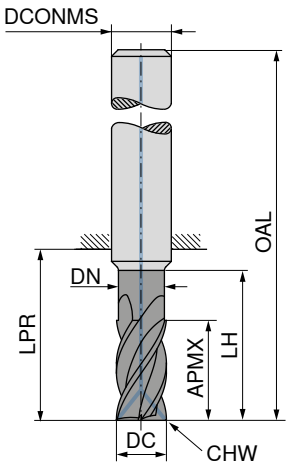

DPB72S

DRAGONSKIN

DIN 6527

50 978 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6,0	13	5,8	19	21	57	6	0,1	4	**06200**
8,0	21	7,7	25	27	63	8	0,2	4	**08200**
10,0	22	9,7	30	32	72	10	0,2	4	**10200**
12,0	26	11,6	36	38	83	12	0,3	4	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	**14200**
16,0	36	15,5	42	44	92	16	0,3	4	**16200**
18,0	36	17,5	42	44	92	18	0,3	4	**18200**
20,0	41	19,5	52	54	104	20	0,3	4	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 392+393

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

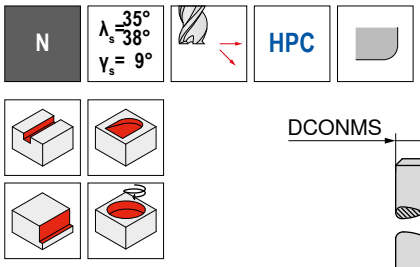

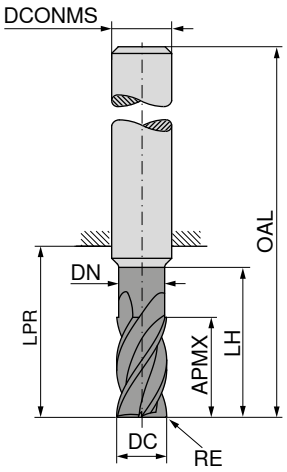

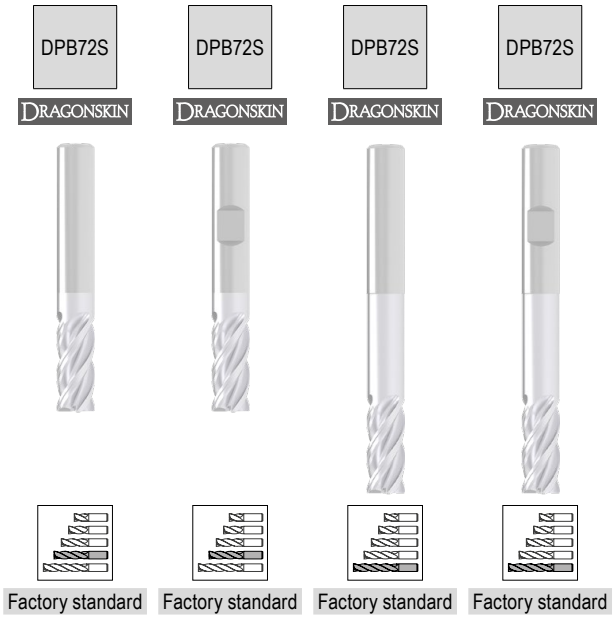

									Factory standard	Factory standard	Factory standard	Factory standard
									50 970 ...	50 971 ...	50 970 ...	50 971 ...
DC f8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP				
mm	mm	mm	mm	mm	mm	mm	mm					
3,0	0,10	8,0	2,8	13	21	57	6	4	03201	03201		
3,0	0,40	8,0	2,8	13	21	57	6	4	03204	03204		
3,0	0,50	8,0	2,8	13	21	57	6	4	03205	03205		
3,0	1,00	8,0	2,8	13	21	57	6	4	03210	03210		
3,0	0,30	6,5	2,8	15	22	58	6	4			03403	03403
3,0	0,50	6,5	2,8	15	22	58	6	4			03405	03405
3,0	0,80	6,5	2,8	15	22	58	6	4			03408	03408
4,0	0,10	11,0	3,8	17	21	57	6	4	04201	04201		
4,0	0,40	11,0	3,8	17	21	57	6	4	04204	04204		
4,0	0,50	11,0	3,8	17	21	57	6	4	04205	04205		
4,0	1,00	11,0	3,8	17	21	57	6	4	04210	04210		
4,0	0,40	8,5	3,8	20	26	62	6	4			04404	04404
4,0	0,50	8,5	3,8	20	26	62	6	4			04405	04405
4,0	0,80	8,5	3,8	20	26	62	6	4			04408	04408
5,0	0,10	13,0	4,8	19	21	57	6	4	05201	05201		
5,0	0,50	13,0	4,8	19	21	57	6	4	05205	05205		
5,0	1,00	13,0	4,8	19	21	57	6	4	05210	05210		
5,0	0,50	10,5	4,8	25	34	70	6	4			05405	05405
5,0	0,80	10,5	4,8	25	34	70	6	4			05408	05408
6,0	0,10	13,0	5,8	19	21	57	6	4	06201	06201		
6,0	0,50	13,0	5,8	19	21	57	6	4	06205	06205		
6,0	1,00	13,0	5,8	19	21	57	6	4	06210	06210		
6,0	1,50	13,0	5,8	19	21	57	6	4	06215	06215		
6,0	0,60	13,0	5,8	30	34	70	6	4			06406	06406
6,0	0,80	13,0	5,8	30	34	70	6	4			06408	06408
6,0	1,00	13,0	5,8	30	34	70	6	4			06410	06410
8,0	0,15	21,0	7,7	25	27	63	8	4	08202	08202		
8,0	0,50	21,0	7,7	25	27	63	8	4	08205	08205		
8,0	1,00	21,0	7,7	25	27	63	8	4	08210	08210		
8,0	1,50	21,0	7,7	25	27	63	8	4	08215	08215		
8,0	2,00	21,0	7,7	25	27	63	8	4	08220	08220		
8,0	0,80	17,0	7,7	40	44	80	8	4			08408	08408
8,0	1,00	17,0	7,7	40	44	80	8	4			08410	08410
8,0	1,50	17,0	7,7	40	44	80	8	4			08415	08415
8,0	2,00	17,0	7,7	40	44	80	8	4			08420	08420
10,0	0,15	22,0	9,7	30	32	72	10	4	10202	10202		
10,0	0,50	22,0	9,7	30	32	72	10	4	10205	10205		
10,0	1,00	22,0	9,7	30	32	72	10	4	10210	10210		
10,0	1,50	22,0	9,7	30	32	72	10	4	10215	10215		
10,0	2,00	22,0	9,7	30	32	72	10	4	10220	10220		
10,0	0,50	21,0	9,7	50	54	94	10	4			10405	10405
10,0	1,00	21,0	9,7	50	54	94	10	4			10410	10410
10,0	1,50	21,0	9,7	50	54	94	10	4			10415	10415
10,0	2,00	21,0	9,7	50	54	94	10	4			10420	10420
12,0	0,20	26,0	11,6	36	38	83	12	4	12202	12202		
12,0	0,50	26,0	11,6	36	38	83	12	4	12205	12205		
12,0	1,00	26,0	11,6	36	38	83	12	4	12210	12210		
P									●	●	●	●
M									●	●	●	●
K									●	●	●	●
N									○	○	○	○
S									●	●	●	●
H												
O												

→ v_c/f_z Page 392+393

Continued on next page

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

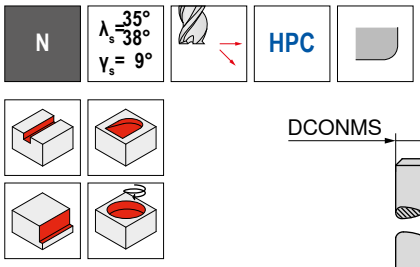

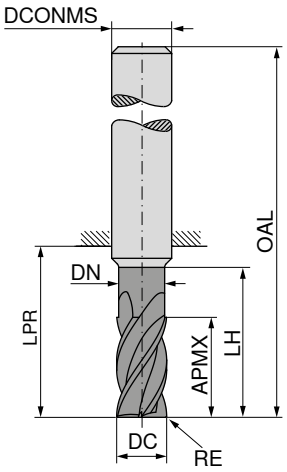

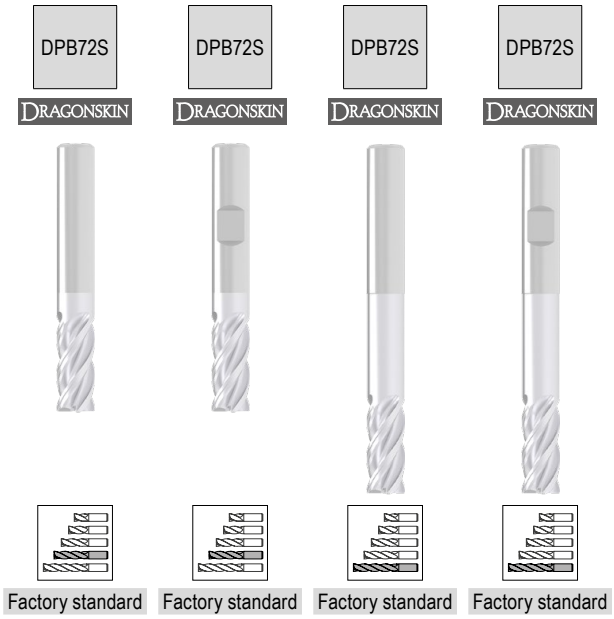

Factory standard | Factory standard | Factory standard | Factory standard

DC f8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	50 970 ...	50 971 ...	50 970 ...	50 971 ...
mm	mm	mm	mm	mm	mm	mm	mm					
12,0	1,50	26,0	11,6	36	38	83	12	4	12215	12215		
12,0	2,00	26,0	11,6	36	38	83	12	4	12220	12220		
12,0	3,00	26,0	11,6	36	38	83	12	4	12230	12230		
12,0	4,00	26,0	11,6	36	38	83	12	4	12240	12240		
12,0	0,50	25,0	11,6	60	64	109	12	4			12405	12405
12,0	1,00	25,0	11,6	60	64	109	12	4			12410	12410
12,0	1,50	25,0	11,6	60	64	109	12	4			12415	12415
12,0	2,00	25,0	11,6	60	64	109	12	4			12420	12420
12,0	3,00	25,0	11,6	60	64	109	12	4			12430	12430
12,0	4,00	25,0	11,6	60	64	109	12	4			12440	12440
14,0	0,30	26,0	13,6	36	38	83	14	4	14203	14203		
14,0	1,00	26,0	13,6	36	38	83	14	4	14210	14210		
14,0	2,00	26,0	13,6	36	38	83	14	4	14220	14220		
14,0	3,00	26,0	13,6	36	38	83	14	4	14230	14230		
14,0	4,00	26,0	13,6	36	38	83	14	4	14240	14240		
14,0	1,00	29,0	13,6	70	74	119	14	4			14410	14410
14,0	2,00	29,0	13,6	70	74	119	14	4			14420	14420
14,0	3,00	29,0	13,6	70	74	119	14	4			14430	14430
14,0	4,00	29,0	13,6	70	74	119	14	4			14440	14440
16,0	0,30	36,0	15,5	42	44	92	16	4	16203	16203		
16,0	1,00	36,0	15,5	42	44	92	16	4	16210	16210		
16,0	2,00	36,0	15,5	42	44	92	16	4	16220	16220		
16,0	3,00	36,0	15,5	42	44	92	16	4	16230	16230		
16,0	4,00	36,0	15,5	42	44	92	16	4	16240	16240		
16,0	1,00	33,0	15,5	80	84	132	16	4			16410	16410
16,0	2,00	33,0	15,5	80	84	132	16	4			16420	16420
16,0	3,00	33,0	15,5	80	84	132	16	4			16430	16430
16,0	4,00	33,0	15,5	80	84	132	16	4			16440	16440
18,0	1,00	36,0	17,5	42	44	92	18	4	18210	18210		
18,0	2,00	36,0	17,5	42	44	92	18	4	18220	18220		
18,0	3,00	36,0	17,5	42	44	92	18	4	18230	18230		
18,0	4,00	36,0	17,5	42	44	92	18	4	18240	18240		
18,0	1,00	38,0	17,5	90	94	142	18	4			18410	18410
18,0	2,00	38,0	17,5	90	94	142	18	4			18420	18420
18,0	3,00	38,0	17,5	90	94	142	18	4			18430	18430
18,0	4,00	38,0	17,5	90	94	142	18	4			18440	18440
20,0	0,30	41,0	19,5	52	54	104	20	4	20203	20203		
20,0	1,00	41,0	19,5	52	54	104	20	4	20210	20210		
20,0	2,00	41,0	19,5	52	54	104	20	4	20220	20220		
20,0	3,00	41,0	19,5	52	54	104	20	4	20230	20230		
20,0	4,00	41,0	19,5	52	54	104	20	4	20240	20240		
20,0	1,00	42,0	19,5	100	104	154	20	4			20410	20410
20,0	2,00	42,0	19,5	100	104	154	20	4			20420	20420
20,0	3,00	42,0	19,5	100	104	154	20	4			20430	20430
20,0	4,00	42,0	19,5	100	104	154	20	4			20440	20440

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

→ v_c/f_z Page 392+393

SilverLine – End milling cutter

The all-rounder for universal application

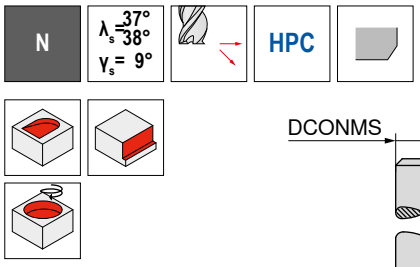

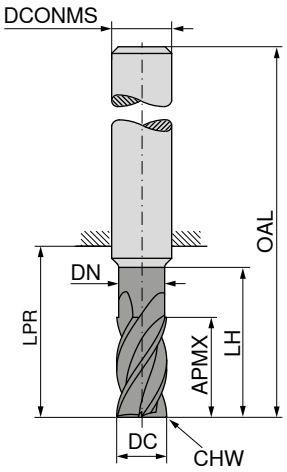

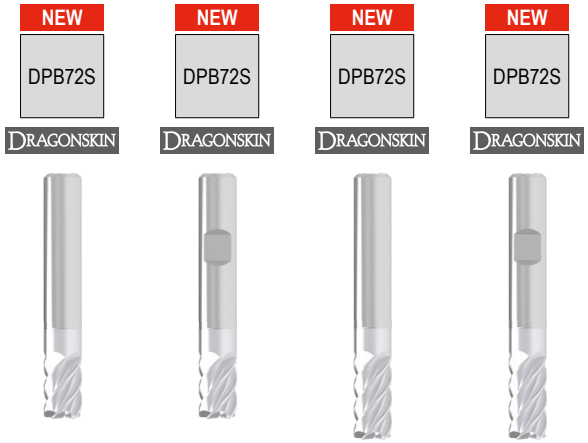

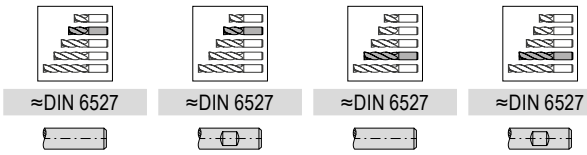

	≈DIN 6527	≈DIN 6527	≈DIN 6527	≈DIN 6527
	50 993 ...	**50 995 ...**	**50 994 ...**	**50 996 ...**

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP				
6	10			18	54	6	0,1	5	**06100**	**06100**		
6	13	5,8	19	21	57	6	0,1	5			**06200**	**06200**
8	12			22	58	8	0,2	5	**08100**	**08100**		
8	21	7,7	25	27	63	8	0,2	5			**08200**	**08200**
10	14			26	66	10	0,2	5	**10100**	**10100**		
10	22	9,7	30	32	72	10	0,2	5			**10200**	**10200**
12	16			28	73	12	0,3	5	**12100**	**12100**		
12	26	11,6	36	38	83	12	0,3	5			**12200**	**12200**
16	22			34	82	16	0,3	5	**16100**	**16100**		
16	36	15,5	42	44	92	16	0,3	5			**16200**	**16200**
20	26			42	92	20	0,3	5	**20100**	**20100**		
20	41	19,5	52	54	104	20	0,3	5			**20200**	**20200**

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

→ v_c/f_z Page 380

SilverLine – End milling cutter

The all-rounder for universal application

▲ Cutting depth: 3 x DC

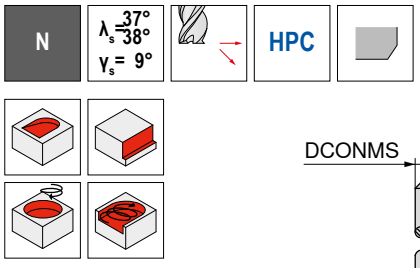

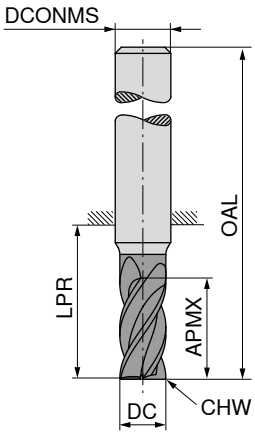

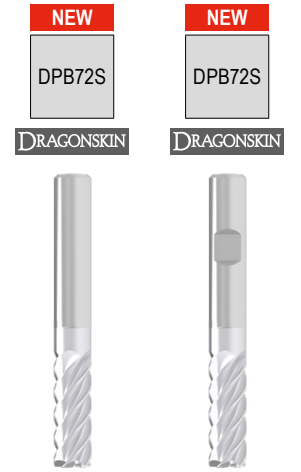



DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 999 ...	50 949 ...
6	19	26	62	6	0,1	5	**06200**	**06200**
8	25	32	68	8	0,2	5	**08200**	**08200**
10	31	40	80	10	0,2	5	**10200**	**10200**
12	37	48	93	12	0,3	5	**12200**	**12200**
16	49	60	108	16	0,3	5	**16200**	**16200**
20	61	76	126	20	0,3	5	**20200**	**20200**

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

→ v_c/f_z Page 381–383

14

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

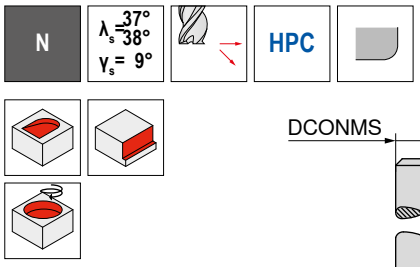

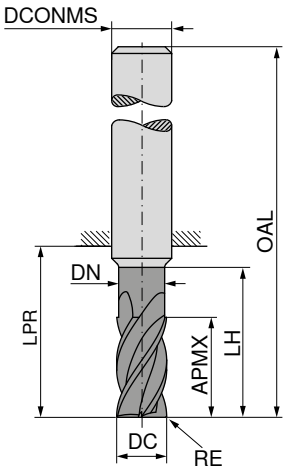

Factory standard

Factory standard

DC e8 mm	RE ±0.05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 997 ...	50 998 ...
6	0,2	13	5,8	19	21	57	6	5	06202	06202
6	0,5	13	5,8	19	21	57	6	5	06205	06205
6	1,0	13	5,8	19	21	57	6	5	06210	06210
8	0,2	21	7,7	25	27	63	8	5	08202	08202
8	0,5	21	7,7	25	27	63	8	5	08205	08205
8	1,0	21	7,7	25	27	63	8	5	08210	08210
8	1,5	21	7,7	25	27	63	8	5	08215	08215
10	0,2	22	9,7	30	32	72	10	5	10202	10202
10	0,5	22	9,7	30	32	72	10	5	10205	10205
10	1,0	22	9,7	30	32	72	10	5	10210	10210
10	1,5	22	9,7	30	32	72	10	5	10215	10215
10	1,6	22	9,7	30	32	72	10	5	10216	10216
10	2,0	22	9,7	30	32	72	10	5	10220	10220
12	0,3	26	11,6	36	38	83	12	5	12203	12203
12	0,5	26	11,6	36	38	83	12	5	12205	12205
12	1,0	26	11,6	36	38	83	12	5	12210	12210
12	1,5	26	11,6	36	38	83	12	5	12215	12215
12	1,6	26	11,6	36	38	83	12	5	12216	12216
12	2,0	26	11,6	36	38	83	12	5	12220	12220
12	2,5	26	11,6	36	38	83	12	5	12225	12225
16	0,3	36	15,5	42	44	92	16	5	16203	16203
16	0,5	36	15,5	42	44	92	16	5	16205	16205
16	1,0	36	15,5	42	44	92	16	5	16210	16210
16	1,5	36	15,5	42	44	92	16	5	16215	16215
16	1,6	36	15,5	42	44	92	16	5	16216	16216
16	2,0	36	15,5	42	44	92	16	5	16220	16220
16	2,5	36	15,5	42	44	92	16	5	16225	16225
16	3,0	36	15,5	42	44	92	16	5	16230	16230
20	0,3	41	19,5	52	54	104	20	5	20203	20203
20	0,5	41	19,5	52	54	104	20	5	20205	20205
20	1,0	41	19,5	52	54	104	20	5	20210	20210
20	1,5	41	19,5	52	54	104	20	5	20215	20215
20	1,6	41	19,5	52	54	104	20	5	20216	20216
20	2,0	41	19,5	52	54	104	20	5	20220	20220
20	2,5	41	19,5	52	54	104	20	5	20225	20225
20	3,0	41	19,5	52	54	104	20	5	20230	20230
20	4,0	41	19,5	52	54	104	20	5	20240	20240

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

→ v_c/f_z Page 380

SilverLine – Roughing-Finishing Cutter

The all-rounder for universal application

▲ With rough-finishing profile

NF | λ_s 35° γ_s 38° 9° | HPC



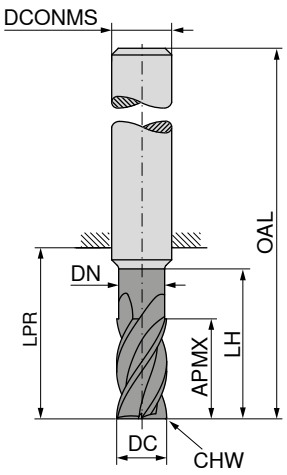

DPB72S

DRAGONSKIN

DIN 6527

50 969 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
3,0	8	2,8	13	21	57	6	0,1	4	**03200**
3,5	11	3,3	17	21	57	6	0,1	4	**03700**
4,0	11	3,8	17	21	57	6	0,1	4	**04200**
4,5	13	4,3	19	21	57	6	0,1	4	**04700**
5,0	13	4,8	19	21	57	6	0,1	4	**05200**
5,5	13	5,3	19	21	57	6	0,1	4	**05700**
6,0	13	5,8	19	21	57	6	0,1	4	**06200**
7,0	21	6,7	25	27	63	8	0,2	4	**07200**
8,0	21	7,7	25	27	63	8	0,2	4	**08200**
9,0	22	8,7	30	32	72	10	0,2	4	**09200**
10,0	22	9,7	30	32	72	10	0,2	4	**10200**
11,0	26	10,6	36	38	83	12	0,3	4	**11200**
12,0	26	11,6	36	38	83	12	0,3	4	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	**14200**
15,0	36	14,5	42	44	92	16	0,3	4	**15200**
16,0	36	15,5	42	44	92	16	0,3	4	**16200**
17,0	36	16,5	42	44	92	18	0,3	4	**17200**
18,0	36	17,5	42	44	92	18	0,3	4	**18200**
19,0	41	18,5	52	54	104	20	0,3	4	**19200**
20,0	41	19,5	52	54	104	20	0,3	4	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 392+393

SilverLine – Rough milling cutter

The all-rounder for universal application

▲ With roughing profile





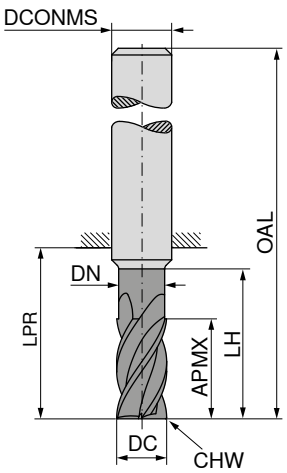

DPB72S

DRAGONSKIN

DIN 6527

50 979 ...

DC d11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
3,0	8	2,8	13	21	57	6	0,1	4	**03200**
3,5	11	3,3	17	21	57	6	0,1	4	**03700**
4,0	11	3,8	17	21	57	6	0,1	4	**04200**
4,5	13	4,3	19	21	57	6	0,1	4	**04700**
5,0	13	4,8	19	21	57	6	0,1	4	**05200**
5,5	13	5,3	19	21	57	6	0,1	4	**05700**
6,0	13	5,8	19	21	57	6	0,1	4	**06200**
7,0	21	6,7	25	27	63	8	0,2	4	**07200**
8,0	21	7,7	25	27	63	8	0,2	4	**08200**
9,0	22	8,7	30	32	72	10	0,2	4	**09200**
10,0	22	9,7	30	32	72	10	0,2	4	**10200**
11,0	26	10,6	36	38	83	12	0,3	4	**11200**
12,0	26	11,6	36	38	83	12	0,3	4	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	**14200**
15,0	36	14,5	42	44	92	16	0,3	4	**15200**
16,0	36	15,5	42	44	92	16	0,3	4	**16200**
17,0	36	16,5	42	44	92	18	0,3	4	**17200**
18,0	36	17,5	42	44	92	18	0,3	4	**18200**
19,0	41	18,5	52	54	104	20	0,3	4	**19200**
20,0	41	19,5	52	54	104	20	0,3	4	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 392+393

SilverLine – High Accuracy Finish Milling Cutter

The all-rounder for universal application

▲ max. taper of 0.008 mm for high precision and parallelism of vertical walls
▲ Tool with cutting edge correction



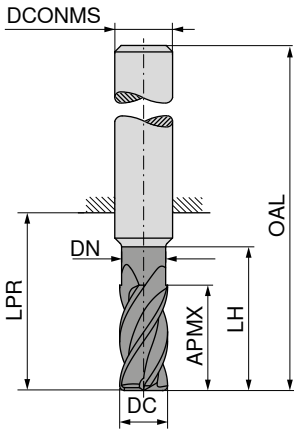

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	≈DIN 6527 50 991 ...	Factory standard 50 991 ...
6,0	10	5,8	18	22	58	6	6	**06200**	
6,0	13	5,6	19	21	57	6	6	**06700**	
6,0	13	5,8	27	31	67	6	6		**06400**
6,0	13	5,8	36	40	76	6	6		**06900**
6,0	15	5,6	42	44	80	6	6		**90000**
8,0	13	7,7	24	28	64	8	6	**08200**	
8,0	17	7,7	36	40	76	8	6		**08400**
8,0	17	7,7	48	53	89	8	6		**08900**
8,0	19	7,6	25	27	63	8	6	**08700**	
8,0	20	7,6	62	64	100	8	6		**90100**
10,0	16	9,7	30	34	74	10	6	**10200**	
10,0	21	9,7	45	49	89	10	6		**10400**
10,0	21	9,7	60	64	104	10	6		**90200**
10,0	22	9,6	30	32	72	10	6	**10700**	
10,0	25	9,6	58	60	100	10	6		**10900**
12,0	19	11,6	36	40	85	12	6	**12200**	
12,0	25	11,6	54	58	103	12	6		**12400**
12,0	25	11,6	72	76	121	12	6		**90300**
12,0	26	11,5	36	38	83	12	6	**12700**	
12,0	30	11,5	73	75	120	12	6		**12900**
16,0	25	15,5	48	52	100	16	6	**16200**	
16,0	32	15,0	42	44	92	16	6	**16700**	
16,0	33	15,5	72	76	124	16	6		**16400**
16,0	33	15,5	96	100	148	16	6		**16900**
16,0	40	15,0	100	102	150	16	6		**90400**
20,0	32	19,5	60	64	114	20	6	**20200**	
20,0	38	19,0	52	54	104	20	6	**20700**	
20,0	42	19,5	90	94	144	20	6		**20400**
20,0	42	19,5	120	124	174	20	6		**90500**
20,0	50	19,0	98	100	150	20	6		**20900**
25,0	40	24,5	75	80	136	25	6	**25200**	
25,0	52	24,5	113	118	174	25	6		**25400**
25,0	52	24,5	150	154	210	25	6		**25900**

P	●	●
M	●	●
K	○	○
N	○	○
S	●	●
H		
O		

→ v_c/f_z Page 394

14

SilverLine – Ball Nosed Cutter

The all-rounder for universal application



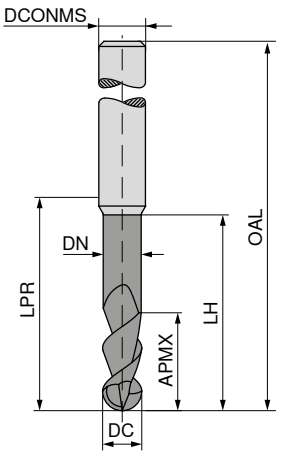



DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 963 ...	50 963 ...
3,0	4	2,8	10,0	14	50	6	2	03115	
3,0	7	3,0	8,8	24	60	6	2		03415
4,0	8	3,8	12,0	18	54	6	2	04120	
4,0	10	4,0	12,5	39	75	6	2		04420
5,0	9	4,8	16,0	18	54	6	2	05125	
5,0	12	5,0	15,0	39	75	6	2		05425
6,0	10	5,7	16,0	18	54	6	2	06130	
6,0	12	6,0	15,0	64	100	6	2		06430
7,0	11	6,6	20,0	22	58	8	2	07135	
8,0	12	7,6	20,0	22	58	8	2	08140	
8,0	14	8,0	17,5	64	100	8	2		08440
10,0	14	9,6	24,0	26	66	10	2	10150	
10,0	18	10,0	22,5	60	100	10	2		10450
12,0	16	11,5	26,0	28	73	12	2	12160	
12,0	22	12,0	27,5	55	100	12	2		12460
14,0	18	13,3	28,0	30	75	14	2	14170	
14,0	26	14,0	32,5	75	120	14	2		14470
16,0	22	15,2	32,0	34	82	16	2	16180	
16,0	30	16,0	37,5	102	150	16	2		16480
18,0	24	17,1	34,0	36	84	18	2	18190	
20,0	26	19,0	40,0	42	92	20	2	20110	
20,0	38	20,0	47,5	100	150	20	2		20410

P	●	●
M		
K	●	●
N	○	○
S		
H	○	○
O		

→ v_c/f_z Page 398+399

SilverLine – Ball Nosed Cutter

The all-rounder for universal application

N

λ_s = 35°
γ_s = 38°
γ_s = 7°

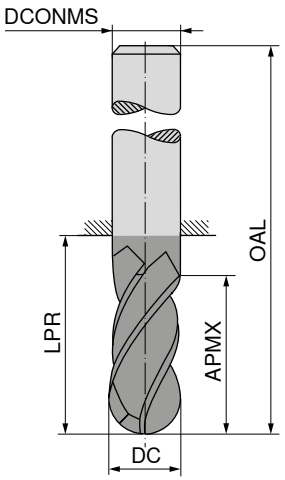

DPB72S

DRAGONSKIN

Factory standard

50 990 ...

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
4,0	11	21	57	6	4	**04220**
5,0	13	21	57	6	4	**05225**
6,0	13	21	57	6	4	**06230**
8,0	19	36	72	8	4	**08280**
10,0	22	32	72	10	4	**10250**
12,0	26	38	83	12	4	**12260**
16,0	32	44	92	16	4	**16280**
20,0	38	54	104	20	4	**20210**

P	●
M	○
K	●
N	○
S	
H	
O	

→ v_c/f_z Page 395–397

SilverLine – Torus Face Milling Cutter

The all-rounder for universal application

▲ APMX does not correspond to the maximum cutting depth

▲ r_{3D} = corner radius to be programmed



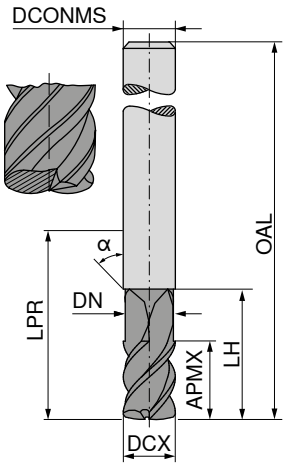

DCX f8 mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	50 989 ...	50 989 ...
6,00	1,12	6	5,5	21	21	57	45	6	4	**06110**	
6,00	1,12	6	5,5	64	64	100	45	6	4		**06410**
8,00	1,23	8	7,4	27	27	63	45	8	4	**08110**	
8,00	1,23	8	7,4	64	64	100	45	8	4		**08410**
10,00	1,17	10	9,2	32	32	72	45	10	4	**10115**	
10,00	1,17	10	9,2	60	60	100	45	10	4		**10415**
12,00	1,86	12	11,0	32	38	83	45	12	4	**12115**	
12,00	1,86	12	11,0	65	65	110	45	12	4		**12415**
16,00	2,47	16	15,0	38	44	92	45	16	4	**16120**	
16,00	2,47	16	15,0	65	102	150	45	16	4		**16420**
20,00	2,61	20	18,5	40	42	92	45	20	4	**20120**	
20,00	2,61	20	18,5	65	100	150	45	20	4		**20420**
P										●	●
M										○	○
K										●	●
N										○	○
S											
H										○	○
O											

→ v_c/f_z Page 400+401

SilverLine – NC deburring cutter

The all-rounder for universal application

▲ Point angle α = 60°

N

λ_s=0°
γ_s=5°



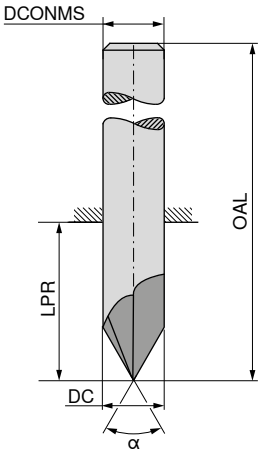

DPB72S DRAGONSKIN

DPB72S DRAGONSKIN

	α = 60° Factory standard	α = 60° Factory standard	α = 60° Factory standard	α = 60° Factory standard
	50 566 ...	**50 567 ...**	**50 562 ...**	**50 563 ...**
DC mm / OAL mm / LPR mm / DCONMS mm / ZEFP				
4 / 50 / 22 / 4 / 5	**04000**		**04000**	
6 / 55 / 19 / 6 / 5	**06000**	**06000**	**06000**	**06000**
8 / 58 / 22 / 8 / 5	**08000**	**08000**	**08000**	**08000**
10 / 60 / 20 / 10 / 5	**10000**	**10000**	**10000**	**10000**
12 / 70 / 25 / 12 / 5	**12000**	**12000**	**12000**	**12000**
16 / 80 / 32 / 16 / 5	**16000**	**16000**	**16000**	**16000**
P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N				
S	●	●	●	●
H				
O				

→ v_c/f_z Page 379

SilverLine – NC deburring cutter

The all-rounder for universal application

▲ High performance 5 flute chamfering tool

N

λ_s=0°
γ_s=5°

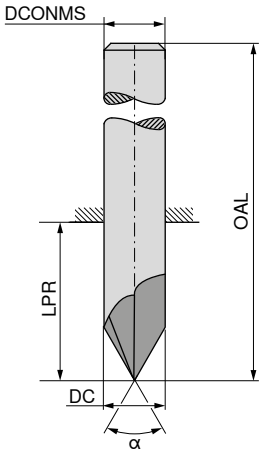

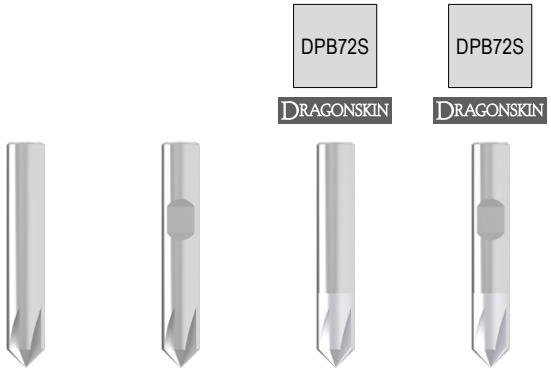

DC mm	OAL mm	LPR mm	DCONMS mm	ZEFP	α = 90° Factory standard 50 564 ...		α = 90° Factory standard 50 565 ...		α = 90° Factory standard 50 560 ...		α = 90° Factory standard 50 561 ...	
4	50	22	4	5	**04000**				**04000**			
6	55	19	6	5	**06000**		**06000**		**06000**		**06000**	
8	58	22	8	5	**08000**		**08000**		**08000**		**08000**	
10	60	20	10	5	**10000**		**10000**		**10000**		**10000**	
12	70	25	12	5	**12000**		**12000**		**12000**		**12000**	
16	80	32	16	5	**16000**		**16000**		**16000**		**16000**	
P					●		●		●		●	
M					●		●		●		●	
K					●		●		●		●	
N												
S					●		●		●		●	
H												
O												

→ v_c/f_z Page 379

S-Cut – End milling cutter

The all-rounder with soft cut and low power consumption

SC UNI | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



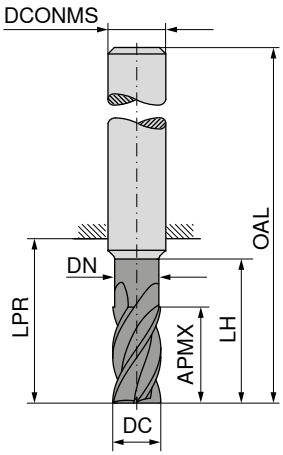

APX72S

≈DIN 6527

52 225 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
3	8	2,8	15,0	21	57	6	4	**030**
4	11	3,8	16,5	21	57	6	4	**040**
5	13	4,8	18,5	21	57	6	4	**050**
6	13	5,5	21,0	21	57	6	4	**060**
8	19	7,5	27,0	27	63	8	4	**080**
10	22	9,5	32,0	32	72	10	4	**100**
12	26	11,5	38,0	38	83	12	4	**120**
14	26	13,5	38,0	38	83	14	4	**140**
16	36	15,5	44,0	44	92	16	4	**160**
18	36	17,5	52,0	52	100	18	4	**180**
20	38	19,5	54,0	54	104	20	4	**200**
25	42	24,0	65,0	65	121	25	4	**250**

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c/f_z Page 402+403

S-Cut – End milling cutter

The all-rounder with soft cut and low power consumption

SC UNI | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



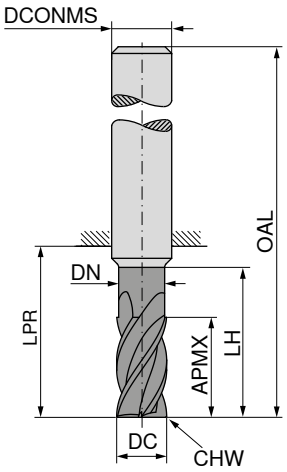

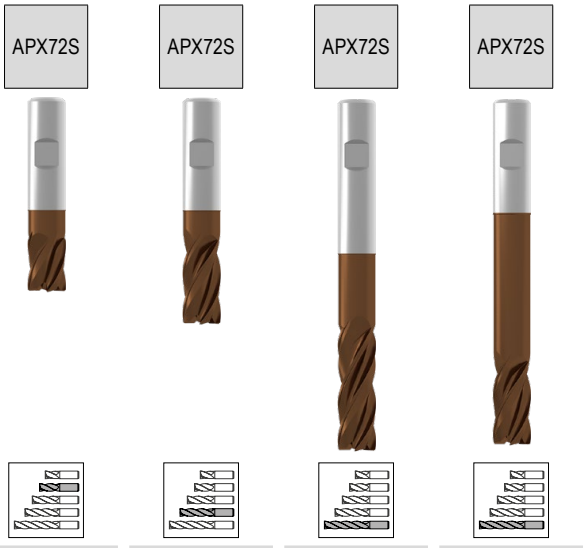

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 223 ...	52 224 ...	52 226 ...	52 227 ...
3	6	2,8	12,0	18	54	6	0,10	4	030			
3	8	2,8	15,0	21	57	6	0,10	4		030		
4	8	3,8	13,5	18	54	6	0,13	4	040			
4	11	3,8	16,5	21	57	6	0,13	4		040		
5	9	4,8	15,5	18	54	6	0,18	4	050			
5	13	4,8	18,5	21	57	6	0,18	4		050		
5	22	4,8	24,5	27	63	6	0,18	4			050	
6	10	5,5	18,0	18	54	6	0,20	4	060			
6	13	5,5	21,0	21	57	6	0,20	4		060		
6	13	5,5	42,0	44	80	6	0,20	4				060
6	22	5,5	27,0	27	63	6	0,20	4			060	
7	12	6,5	22,0	22	58	8	0,20	4	070			
7	19	6,5	27,0	27	63	8	0,20	4		070		
8	12	7,5	22,0	22	58	8	0,20	4	080			
8	19	7,5	27,0	27	63	8	0,20	4		080		
8	21	7,5	62,0	64	100	8	0,20	4				080
8	28	7,5	36,0	44	80	8	0,20	4			080	
9	14	8,5	26,0	26	66	10	0,30	4	090			
9	22	8,5	32,0	32	72	10	0,20	4		090		
10	14	9,5	26,0	26	66	10	0,30	4	100			
10	22	9,5	32,0	32	72	10	0,30	4		100		
10	22	9,5	58,0	60	100	10	0,30	4				100
10	33	9,5	54,0	60	100	10	0,30	4			100	
11	16	10,5	28,0	28	73	12	0,30	4	110			
11	26	10,5	38,0	38	83	12	0,30	4		110		
12	16	11,5	28,0	28	73	12	0,30	4	120			
12	26	11,5	38,0	38	83	12	0,30	4		120		
12	26	11,5	73,0	75	120	12	0,30	4				120
12	42	11,5	54,0	55	100	12	0,30	4			120	
13	18	12,5	30,0	30	75	14	0,30	4	130			
13	26	12,5	38,0	38	83	14	0,30	4		130		
14	18	13,5	30,0	30	75	14	0,30	4	140			
14	26	13,5	38,0	38	83	14	0,30	4		140		
14	48	13,5	54,0	55	100	14	0,30	4			140	
16	22	15,5	34,0	34	82	16	0,40	4	160			
16	36	15,5	44,0	44	92	16	0,40	4		160		
16	36	15,5	100,0	102	150	16	0,40	4				160
16	53	15,5	84,0	102	150	16	0,40	4			160	
18	24	17,5	34,0	36	84	18	0,40	4	180			
18	36	17,5	52,0	52	100	18	0,40	4		180		
20	26	19,5	42,0	42	92	20	0,50	4	200			
20	38	19,5	54,0	54	104	20	0,50	4		200		
20	38	19,5	100,0	100	150	20	0,50	4				200
20	68	19,5	84,0	100	150	20	0,50	4			200	
25	32	24,0	46,0	49	105	25	0,50	4	250			
25	42	24,0	65,0	65	121	25	0,50	4		250		
25	68	24,0	84,0	94	150	25	0,50	4			250	

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O				

→ v_c/f_z Page 402–405

S-Cut – End milling cutter with corner radius

The all-rounder with soft cut and low power consumption

SC UNI | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



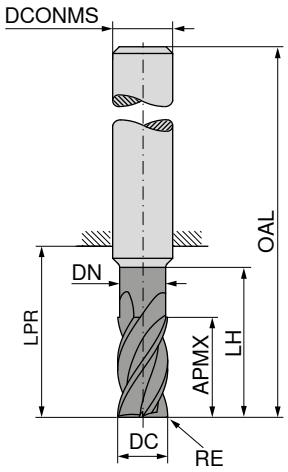

APX72S

≈DIN 6527

52 228 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
3	0,25	8	2,8	15,0	21	57	6	4	03003
3	0,50	8	2,8	15,0	21	57	6	4	03005
3	1,00	8	2,8	15,0	21	57	6	4	03010
4	0,25	11	3,8	16,5	21	57	6	4	04003
4	0,50	11	3,8	16,5	21	57	6	4	04005
4	1,00	11	3,8	16,5	21	57	6	4	04010
5	0,50	13	4,8	18,5	21	57	6	4	05005
5	1,00	13	4,8	18,5	21	57	6	4	05010
5	1,50	13	4,8	18,5	21	57	6	4	05015
6	0,50	13	5,5	21,0	21	57	6	4	06005
6	0,80	13	5,5	21,0	21	57	6	4	06008
6	1,00	13	5,5	21,0	21	57	6	4	06010
6	1,50	13	5,5	21,0	21	57	6	4	06015
6	2,00	13	5,5	21,0	21	57	6	4	06020
8	0,50	19	7,5	27,0	27	63	8	4	08005
8	0,80	19	7,5	27,0	27	63	8	4	08008
8	1,00	19	7,5	27,0	27	63	8	4	08010
8	1,50	19	7,5	27,0	27	63	8	4	08015
8	2,00	19	7,5	27,0	27	63	8	4	08020
10	0,50	22	9,5	32,0	32	72	10	4	10005
10	1,00	22	9,5	32,0	32	72	10	4	10010
10	1,50	22	9,5	32,0	32	72	10	4	10015
10	1,60	22	9,5	32,0	32	72	10	4	10016
10	2,00	22	9,5	32,0	32	72	10	4	10020
12	0,50	26	11,5	38,0	38	83	12	4	12005
12	1,00	26	11,5	38,0	38	83	12	4	12010
12	1,50	26	11,5	38,0	38	83	12	4	12015
12	1,60	26	11,5	38,0	38	83	12	4	12016
12	2,00	26	11,5	38,0	38	83	12	4	12020
12	3,00	26	11,5	38,0	38	83	12	4	12030
16	1,00	36	15,5	44,0	44	92	16	4	16010
16	1,50	36	15,5	44,0	44	92	16	4	16015
16	1,60	36	15,5	44,0	44	92	16	4	16016
16	2,00	36	15,5	44,0	44	92	16	4	16020
16	2,50	36	15,5	44,0	44	92	16	4	16025
16	3,00	36	15,5	44,0	44	92	16	4	16030
20	1,00	38	19,5	54,0	54	104	20	4	20010
20	1,50	38	19,5	54,0	54	104	20	4	20015
20	2,00	38	19,5	54,0	54	104	20	4	20020
20	2,50	38	19,5	54,0	54	104	20	4	20025
20	3,00	38	19,5	54,0	54	104	20	4	20030
20	4,00	38	19,5	54,0	54	104	20	4	20040

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c/f_z Page 402+403

14

S-Cut – End milling cutter

The all-rounder with soft cut and low power consumption

▲ Suitable for trochoidal milling
▲ With chip breaker

SC UNI | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



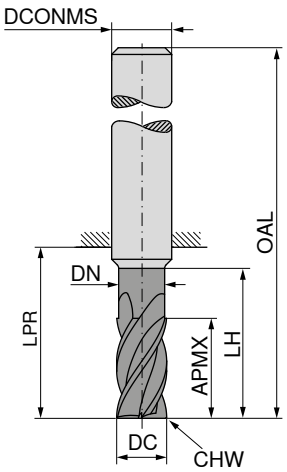

APX72S

≈DIN 6527

52 230 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6	18	5,5	25	26	62	6	0,12	5	**060**
8	24	7,5	30	32	68	8	0,16	5	**080**
10	30	9,5	35	40	80	10	0,20	5	**100**
12	36	11,5	45	48	93	12	0,24	5	**120**
16	48	15,5	55	60	108	16	0,32	5	**160**
20	60	19,5	70	76	126	20	0,40	5	**200**

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 406+407

S-Cut – Rough milling cutter

The all-rounder with soft cut and low power consumption

▲ With roughing profile

SC NR | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



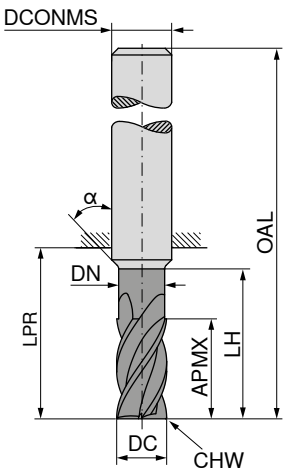





≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC $_{h11}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	α°	ZEFP	52 205 ...	52 205 ...	52 205 ...
3	6	2,8	12,0	18	54	6	0,18	15	4	**03100**		
3	8	2,8	14,0	21	57	6	0,18	15	4		**03200**	
3	8	2,8	19,0	26	62	6	0,18	15	4			**03400**
4	8	3,8	13,5	18	54	6	0,20	15	4	**04100**		
4	11	3,8	18,0	21	57	6	0,20	15	4		**04200**	
4	11	3,8	23,0	26	62	6	0,20	15	4			**04400**
5	9	4,8	15,5	18	54	6	0,25	15	4	**05100**		
5	13	4,8	19,0	21	57	6	0,25	15	4		**05200**	
5	13	4,8	24,0	26	62	6	0,25	15	4			**05400**
6	10	5,5	18,0	18	54	6	0,25		4	**06100**		
6	13	5,5	20,0	21	57	6	0,25		4		**06200**	
6	13	5,5	25,0	26	62	6	0,25		4			**06400**
8	12	7,5	22,0	22	58	8	0,30		4	**08100**		
8	19	7,5	25,0	27	63	8	0,30		4		**08200**	
8	19	7,5	30,0	32	68	8	0,30		4			**08400**
10	14	9,5	26,0	26	66	10	0,30		4	**10100**		
10	22	9,5	30,0	32	72	10	0,30		4		**10200**	
10	22	9,5	35,0	40	80	10	0,30		4			**10400**
12	16	11,5	28,0	28	73	12	0,45		4	**12100**		
12	26	11,5	35,0	38	83	12	0,45		4		**12200**	
12	26	11,5	45,0	48	93	12	0,45		4			**12400**
14	18	13,5	30,0	30	75	14	0,50		4	**14100**		
14	26	13,5	35,0	38	83	14	0,50		4		**14200**	
14	26	13,5	50,0	54	99	14	0,50		4			**14400**
16	22	15,5	34,0	34	82	16	0,60		4	**16100**		
16	32	15,5	40,0	44	92	16	0,60		4		**16200**	
16	32	15,5	55,0	60	108	16	0,60		4			**16400**
20	26	19,5	42,0	42	92	20	0,60		4	**20100**		
20	38	19,5	50,0	54	104	20	0,60		4		**20200**	
20	38	19,5	70,0	76	126	20	0,60		4			**20400**
P										●	●	●
M										●	●	●
K										●	●	●
N										○	○	○
S										○	○	○
H										○	○	○
O												

→ v_c/f_z Page 402–405

3D Finish – Barrel shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



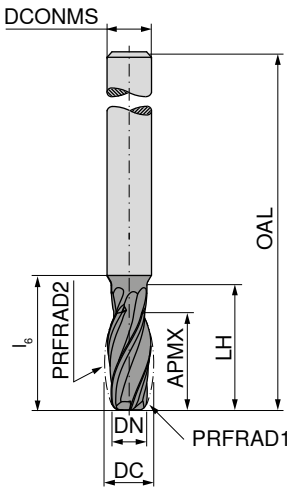

APB72S

DIN 6527

52 739 ...

DC mm	DCONMS h6 mm	DN mm	PRFRAD1 mm	PRFRAD2 mm	LH mm	APMX mm	l_6 mm	OAL mm	ZEFP	
10	10	8	2	50	28	21	30	80	4	**100**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 408

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

3D Finish – Oval shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



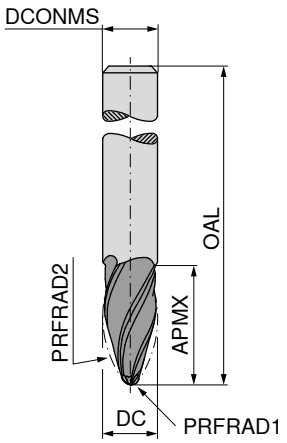

APB72S

DIN 6527

52 745 ...

DC mm	DCONMS h6 mm	PRFRAD1 mm	PRFRAD2 mm	APMX mm	OAL mm	ZEFP	
6	6	1	95	22	62	3	**060**
8	8	1	90	25	68	3	**080**
10	10	2	85	26	72	4	**100**
12	12	2	80	28	83	4	**120**
16	16	3	75	31	92	4	**160**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 409

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

14

3D Finish – Taper shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm

N | λ_s=30°



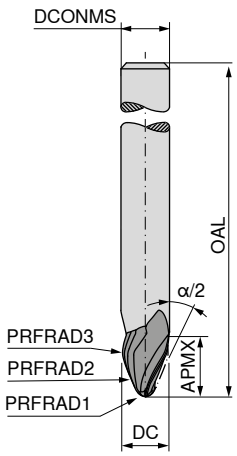

APB72S

DIN 6527

52 753 ...

DC mm	DCONMS $_{h6}$ mm	PRFRAD1 mm	PRFRAD2 mm	PRFRAD3 mm	α°/2	APMX mm	OAL mm	ZEFP	
6	6	1,0	250	3	17,5	9,5	62	3	**060**
8	8	1,5	250	4	20	10,5	68	3	**080**
10	10	2,0	250	5	20	12,5	80	3	**100**
12	12	1,0	200	1	42,5	8,0	93	3	**120**
12	12	3,0	250	6	20	13,5	93	3	**121**
16	16	2,0	1000	5	12,5	31,0	108	3	**160**
16	16	4,0	500	8	20	18,5	108	3	**161**
16	16	4,0	1000	5	12,5	24,0	108	3	**162**
16	16	4,0	1500	8	20	18,5	108	3	**163**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 410

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

3D Finish – Taper shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



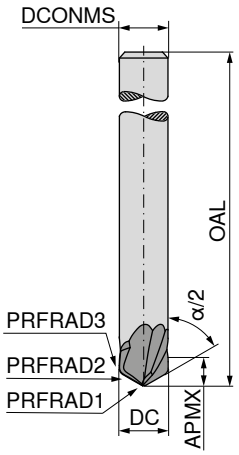

APB72S

DIN 6527

52 755 ...

DC mm	DCONMS h6 mm	PRFRAD1 mm	PRFRAD2 mm	PRFRAD3 mm	α°/2	APMX mm	OAL mm	ZEFP	
10	10	1	200	1,5	60	6	80	2	**100**
10	10	1	200	2,0	70	6	80	2	**101**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 410

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

14

3D Finish – Lens shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



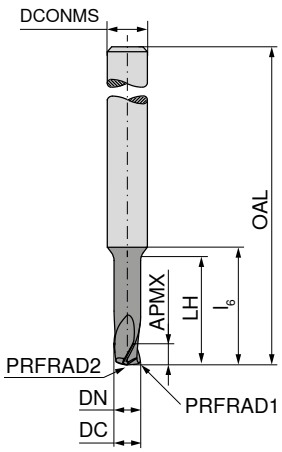

APB72S

DIN 6527

52 756 ...

DC mm	DCONMS h6 mm	DN mm	PRFRAD1 mm	PRFRAD2 mm	LH mm	APMX mm	l6 mm	OAL mm	ZEFP	
4	6	4	0,25	6	18	4	20	62	3	**040**
6	6		0,50	10		6		62	3	**060**
8	8		0,75	15		8		68	3	**080**
10	10		1,00	20		10		80	3	**100**
12	12		1,25	25		12		93	3	**120**

P	●
M	●
K	●
N	●
S	●
H	
O	

→ v_c/f_z Page 411

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

BlueLine – Micro-end milling cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





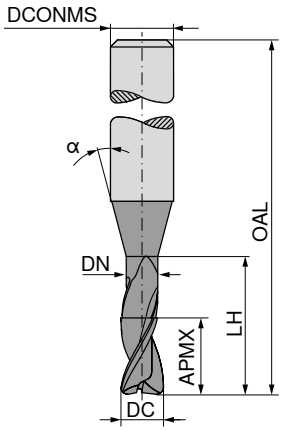

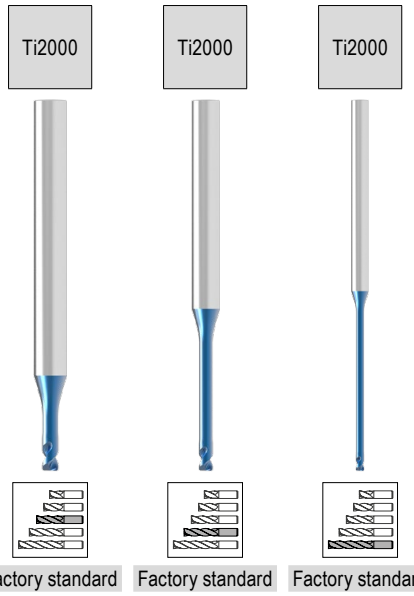

Factory standard | Factory standard | Factory standard

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 345 ...	52 346 ...	52 347 ...
0,2	0,3	0,18	0,5	45	16	4	2,5 x DC	2	**302**		
0,2	0,3	0,18	1,0	45	16	4	5 x DC	2	**402**		
0,2	0,3	0,18	1,5	45	16	4	7,5 x DC	2	**502**		
0,3	0,4	0,28	1,0	45	16	4	3,3 x DC	2	**303**		
0,3	0,4	0,28	2,0	45	16	4	6,6 x DC	2	**403**		
0,3	0,4	0,28	3,0	45	16	4	10 x DC	2		**303**	
0,3	0,4	0,28	6,0	45	16	4	20 x DC	2		**403**	
0,3	0,4	0,28	9,0	45	16	4	30 x DC	2			**303**
0,4	0,6	0,38	2,0	45	16	4	5 x DC	2	**304**		
0,4	0,6	0,38	3,0	45	16	4	7,5 x DC	2	**404**		
0,4	0,6	0,38	4,0	45	16	4	10 x DC	2		**304**	
0,4	0,6	0,38	5,0	45	16	4	12,5 x DC	2		**404**	
0,4	0,6	0,38	8,0	45	16	4	20 x DC	2			**304**
0,4	0,6	0,38	12,0	45	16	4	30 x DC	2			**404**
0,5	0,7	0,48	2,0	45	16	4	4 x DC	2	**305**		
0,5	0,7	0,48	4,0	45	16	4	8 x DC	2	**405**		
0,5	0,7	0,48	6,0	45	16	4	12 x DC	2		**305**	
0,5	0,7	0,48	8,0	45	16	4	16 x DC	2		**405**	
0,5	0,7	0,48	10,0	50	16	4	20 x DC	2			**305**
0,5	0,7	0,48	15,0	50	16	4	30 x DC	2			**405**
0,6	0,9	0,58	2,0	45	16	4	3,3 x DC	2	**306**		
0,6	0,9	0,58	4,0	45	16	4	6,6 x DC	2	**406**		
0,6	0,9	0,58	6,0	45	16	4	10 x DC	2		**306**	
0,6	0,9	0,58	8,0	45	16	4	13,3 x DC	2		**406**	
0,6	0,9	0,58	10,0	45	16	4	16,6 x DC	2		**506**	
0,6	0,9	0,58	12,0	50	16	4	20 x DC	2			**306**
0,6	0,9	0,58	18,0	50	16	4	30 x DC	2			**406**
0,7	1,0	0,68	2,0	45	16	4	2,8 x DC	2	**307**		
0,7	1,0	0,68	4,0	45	16	4	5,7 x DC	2	**407**		
0,7	1,0	0,68	6,0	45	16	4	8,5 x DC	2	**507**		
0,7	1,0	0,68	8,0	45	16	4	11,4 x DC	2		**307**	
0,7	1,0	0,68	10,0	50	16	4	14,2 x DC	2		**407**	
0,8	1,2	0,78	4,0	45	16	4	5 x DC	2	**308**		
0,8	1,2	0,78	6,0	45	16	4	7,5 x DC	2	**408**		
0,8	1,2	0,78	8,0	45	16	4	10 x DC	2		**308**	
0,8	1,2	0,78	10,0	50	16	4	12,5 x DC	2		**408**	
0,8	1,2	0,78	12,0	50	16	4	15 x DC	2		**508**	
0,8	1,2	0,78	16,0	50	16	4	20 x DC	2			**308**
0,8	1,2	0,78	24,0	60	16	4	30 x DC	2			**408**
0,9	1,3	0,88	4,0	45	16	4	4,4 x DC	2	**309**		
0,9	1,3	0,88	6,0	45	16	4	6,6 x DC	2	**409**		
0,9	1,3	0,88	8,0	45	16	4	8,8 x DC	2	**509**		
0,9	1,3	0,88	10,0	45	16	4	11 x DC	2		**309**	
0,9	1,3	0,88	15,0	50	16	4	16,6 x DC	2		**409**	
1,0	1,5	0,95	4,0	45	16	4	4 x DC	2	**310**		
P									●	●	●
M											
K											
N											
S											
H									●	●	●
O											

→ v_c/f_z Page 420+421

14

Continued on next page

BlueLine – Micro-end milling cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





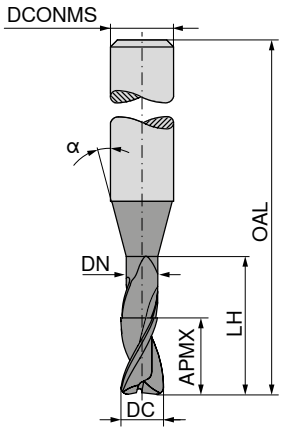

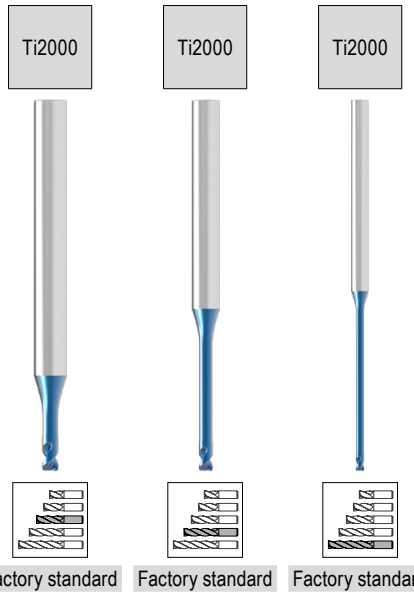

Factory standard | Factory standard | Factory standard

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 345 ...	52 346 ...	52 347 ...
1,0	1,5	0,95	6,0	45	16	4	6 x DC	2	**410**		
1,0	1,5	0,95	8,0	45	16	4	8 x DC	2	**510**		
1,0	1,5	0,95	10,0	45	16	4	10 x DC	2		**310**	
1,0	1,5	0,95	12,0	45	16	4	12 x DC	2		**410**	
1,0	1,5	0,95	14,0	45	16	4	14 x DC	2		**510**	
1,0	1,5	0,95	16,0	50	16	4	16 x DC	2		**610**	
1,0	1,5	0,95	20,0	54	16	4	20 x DC	2			**310**
1,0	1,5	0,95	25,0	70	16	4	25 x DC	2			**410**
1,0	1,5	0,95	30,0	70	16	4	30 x DC	2			**510**
1,2	1,8	1,14	6,0	45	16	4	5 x DC	2	**312**		
1,2	1,8	1,14	8,0	45	16	4	6,6 x DC	2	**412**		
1,2	1,8	1,14	10,0	45	16	4	8,3 x DC	2	**512**		
1,2	1,8	1,14	12,0	45	16	4	10 x DC	2		**312**	
1,2	1,8	1,14	16,0	50	16	4	13,3 x DC	2		**412**	
1,2	1,8	1,14	20,0	60	16	4	16,6 x DC	2		**512**	
1,4	2,1	1,34	6,0	45	16	4	4,2 x DC	2	**314**		
1,4	2,1	1,34	8,0	45	16	4	5,7 x DC	2	**414**		
1,4	2,1	1,34	10,0	45	16	4	7,1 x DC	2	**514**		
1,4	2,1	1,34	12,0	45	16	4	8,5 x DC	2	**614**		
1,4	2,1	1,34	14,0	45	16	4	10 x DC	2		**314**	
1,4	2,1	1,34	16,0	50	16	4	11,4 x DC	2		**414**	
1,4	2,1	1,34	22,0	54	16	4	15,7 x DC	2		**514**	
1,5	2,3	1,44	6,0	45	16	4	4 x DC	2	**315**		
1,5	2,3	1,44	8,0	45	16	4	5,3 x DC	2	**415**		
1,5	2,3	1,44	10,0	45	16	4	6,6 x DC	2	**515**		
1,5	2,3	1,44	12,0	45	16	4	8 x DC	2	**615**		
1,5	2,3	1,44	14,0	50	16	4	9,3 x DC	2	**715**		
1,5	2,3	1,44	16,0	50	16	4	10,6 x DC	2		**315**	
1,5	2,3	1,44	18,0	54	16	4	12 x DC	2		**415**	
1,5	2,3	1,44	20,0	54	16	4	13,3 x DC	2		**515**	
1,5	2,3	1,44	25,0	70	16	4	16,6 x DC	2		**615**	
1,5	2,3	1,44	30,0	70	16	4	20 x DC	2		**715**	
1,5	2,3	1,44	35,0	70	16	4	23,3 x DC	2			**315**
1,5	2,3	1,44	40,0	80	16	4	26,6 x DC	2			**415**
1,5	2,3	1,44	45,0	80	16	4	30 x DC	2			**515**
1,6	2,4	1,51	6,0	45	16	4	3,7 x DC	2	**316**		
1,6	2,4	1,51	8,0	45	16	4	5 x DC	2	**416**		
1,6	2,4	1,51	10,0	45	16	4	6,2 x DC	2	**516**		
1,6	2,4	1,51	12,0	45	16	4	7,5 x DC	2	**616**		
1,6	2,4	1,51	14,0	50	16	4	8,75 x DC	2	**716**		
1,6	2,4	1,51	16,0	50	16	4	10 x DC	2		**316**	
1,6	2,4	1,51	18,0	54	16	4	11,25 x DC	2		**416**	
1,6	2,4	1,51	20,0	54	16	4	12,5 x DC	2		**516**	
1,6	2,4	1,51	26,0	60	16	4	16,2 x DC	2		**616**	
1,8	2,7	1,71	6,0	45	16	4	3,3 x DC	2	**318**		

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

Continued on next page

BlueLine – Micro-end milling cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





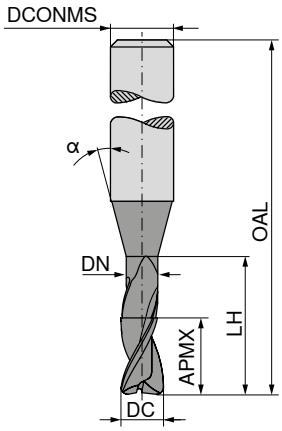

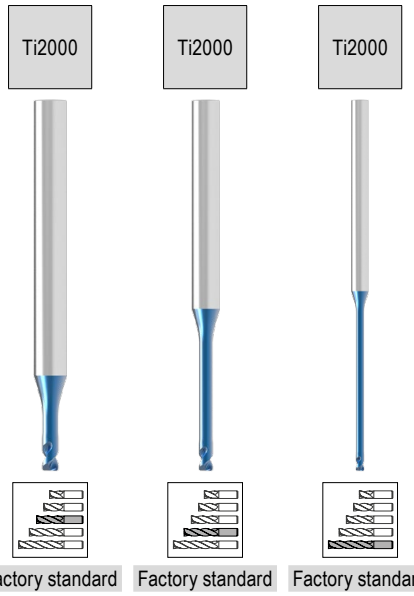

Factory standard | Factory standard | Factory standard

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 345 ...	52 346 ...	52 347 ...
1,8	2,7	1,71	8,0	45	16	4	4,4 x DC	2	**418**		
1,8	2,7	1,71	10,0	45	16	4	5,5 x DC	2	**518**		
1,8	2,7	1,71	12,0	45	16	4	6,6 x DC	2	**618**		
1,8	2,7	1,71	14,0	50	16	4	7,7 x DC	2	**718**		
1,8	2,7	1,71	16,0	50	16	4	8,8 x DC	2	**818**		
1,8	2,7	1,71	18,0	54	16	4	10 x DC	2		**318**	
1,8	2,7	1,71	20,0	54	16	4	11 x DC	2		**418**	
1,8	2,7	1,71	25,0	60	16	4	13,8 x DC	2		**518**	
2,0	3,0	1,91	6,0	45	16	4	3 x DC	2	**320**		
2,0	3,0	1,91	8,0	45	16	4	4 x DC	2	**420**		
2,0	3,0	1,91	10,0	45	16	4	5 x DC	2	**520**		
2,0	3,0	1,91	12,0	45	16	4	6 x DC	2	**620**		
2,0	3,0	1,91	14,0	50	16	4	7 x DC	2	**720**		
2,0	3,0	1,91	16,0	50	16	4	8 x DC	2	**820**		
2,0	3,0	1,91	18,0	54	16	4	9 x DC	2	**920**		
2,0	3,0	1,91	20,0	54	16	4	10 x DC	2		**320**	
2,0	3,0	1,91	25,0	60	16	4	12,5 x DC	2		**420**	
2,0	3,0	1,91	30,0	70	16	4	15 x DC	2		**520**	
2,0	3,0	1,91	35,0	80	16	4	17,5 x DC	2		**620**	
2,0	3,0	1,91	40,0	90	16	4	20 x DC	2			**320**
2,0	3,0	1,91	50,0	100	16	4	25 x DC	2			**420**
2,0	3,0	1,91	60,0	110	16	4	30 x DC	2			**520**
2,5	3,7	2,41	8,0	45	16	4	3,2 x DC	2	**325**		
2,5	3,7	2,41	10,0	45	16	4	4 x DC	2	**425**		
2,5	3,7	2,41	12,0	45	16	4	4,8 x DC	2	**525**		
2,5	3,7	2,41	14,0	50	16	4	5,6 x DC	2	**625**		
2,5	3,7	2,41	16,0	50	16	4	6,4 x DC	2	**725**		
2,5	3,7	2,41	18,0	54	16	4	7,2 x DC	2	**825**		
2,5	3,7	2,41	20,0	54	16	4	8 x DC	2	**925**		
2,5	3,7	2,41	25,0	60	16	4	10 x DC	2		**325**	
2,5	3,7	2,41	30,0	70	16	4	12 x DC	2		**425**	
2,5	3,7	2,41	40,0	90	16	4	16 x DC	2		**525**	
2,5	3,7	2,41	50,0	100	16	4	20 x DC	2			**325**
3,0	4,5	2,92	8,0	45	16	4	2,6 x DC	2	**330**		
3,0	4,5	2,92	12,0	45	16	4	4 x DC	2	**430**		
3,0	4,5	2,92	16,0	50	16	4	5,3 x DC	2	**530**		
3,0	4,5	2,92	20,0	54	16	4	6,6 x DC	2	**630**		

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

14

BlueLine – Micro-ball nosed cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

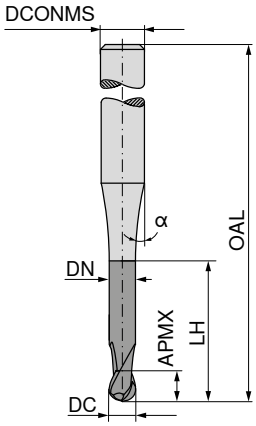

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

									52 356 ...	52 358 ...	52 357 ...	52 359 ...	52 360 ...
DC $_{-0,01}$	APMX	DN	LH	OAL	α°	DCONMS $_{h5}$	T_X	ZEFP					
mm	mm	mm	mm	mm		mm							
0,2	0,16	0,17	0,30	45	16	4	1,5 x DC	2	**302**				
0,2	0,16	0,17	0,50	45	16	4	2,5 x DC	2	**402**				
0,2	0,16	0,17	0,75	45	16	4	3,75 x DC	2	**502**				
0,2	0,16	0,17	1,00	45	16	4	5 x DC	2	**602**				
0,2	0,16	0,17	1,25	45	16	4	6,2 x DC	2	**702**				
0,2	0,16	0,17	1,50	45	16	4	7,5 x DC	2	**802**				
0,2	0,16	0,17	1,75	45	16	4	8,7 x DC	2	**902**				
0,2	0,16	0,17	2,00	45	16	4	10 x DC	2			**302**		
0,2	0,16	0,17	2,50	45	16	4	12,5 x DC	2			**402**		
0,2	0,16	0,17	3,00	45	16	4	15 x DC	2			**502**		
0,3	0,24	0,27	0,50	45	16	4	1,6 x DC	2	**303**				
0,3	0,24	0,27	0,75	45	16	4	2,5 x DC	2	**403**				
0,3	0,24	0,27	1,00	45	16	4	3,3 x DC	2	**503**				
0,3	0,24	0,27	1,25	45	16	4	4,1 x DC	2	**603**				
0,3	0,24	0,27	1,50	45	16	4	5 x DC	2	**703**				
0,3	0,24	0,27	1,75	50	16	4	5,8 x DC	2		**303**			
0,3	0,24	0,27	2,00	50	16	4	6,6 x DC	2		**403**			
0,3	0,24	0,27	2,25	50	16	4	7,5 x DC	2		**503**			
0,3	0,24	0,27	2,50	50	16	4	8,3 x DC	2		**603**			
0,3	0,24	0,27	2,75	50	16	4	9,1 x DC	2		**703**			
0,3	0,24	0,27	3,00	50	16	4	10 x DC	2				**303**	
0,3	0,24	0,27	3,50	50	16	4	11,6 x DC	2				**403**	
0,3	0,24	0,27	4,00	50	16	4	13,3 x DC	2				**503**	
0,3	0,24	0,27	4,50	50	16	4	15 x DC	2				**603**	
0,4	0,32	0,34	0,50	45	16	4	1,2 x DC	2	**304**				
0,4	0,32	0,34	1,00	45	16	4	2,5 x DC	2	**404**				
0,4	0,32	0,34	1,50	45	16	4	3,75 x DC	2	**504**				
0,4	0,32	0,34	2,00	45	16	4	5 x DC	2	**604**				
0,4	0,32	0,34	2,50	45	16	4	6,2 x DC	2	**704**				
0,4	0,32	0,34	3,00	45	16	4	7,5 x DC	2	**804**				
0,4	0,32	0,34	3,50	45	16	4	8,7 x DC	2	**904**				
0,4	0,32	0,34	4,00	45	16	4	10 x DC	2			**304**		
0,4	0,32	0,34	4,50	45	16	4	11,2 x DC	2			**404**		
0,4	0,32	0,34	5,00	45	16	4	12,5 x DC	2			**504**		
0,4	0,32	0,34	5,50	45	16	4	13,7 x DC	2			**604**		
0,4	0,32	0,34	6,00	45	16	4	15 x DC	2			**704**		
0,5	0,40	0,47	1,50	45	16	4	3 x DC	2	**305**				
0,5	0,40	0,47	2,00	45	16	4	4 x DC	2	**405**				
0,5	0,40	0,47	2,50	45	16	4	5 x DC	2	**505**				
0,5	0,40	0,47	3,00	45	16	4	6 x DC	2	**605**				
0,5	0,40	0,47	3,50	45	16	4	7 x DC	2	**705**				
P									●	●	●	●	●
M													
K													
N													
S													
H									●	●	●	●	●
O													

→ v_c/f_z Page 422+423

Continued on next page

BlueLine – Micro-ball nosed cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

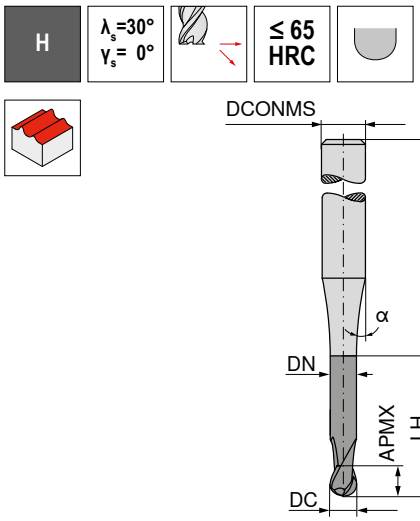

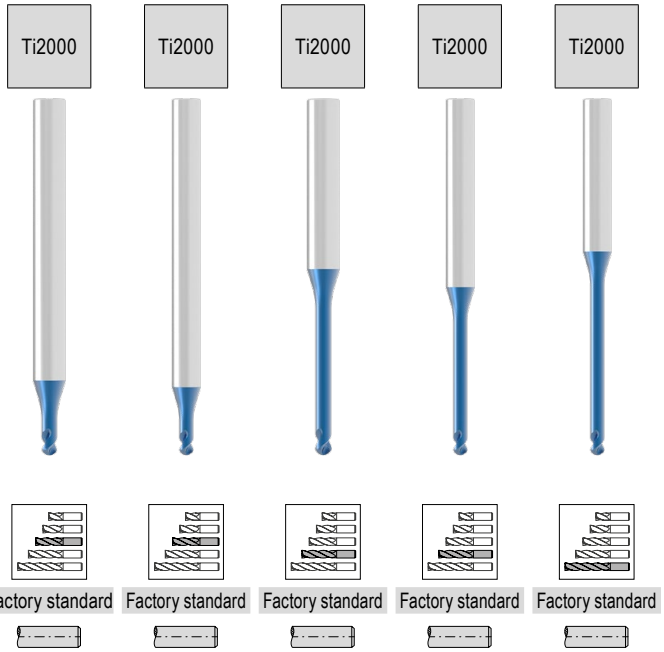

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 356 ...	52 358 ...	52 357 ...	52 359 ...	52 360 ...
0,5	0,40	0,47	4,00	45	16	4	8 x DC	2	**805**				
0,5	0,40	0,47	4,50	45	16	4	9 x DC	2	**905**				
0,5	0,40	0,47	5,00	45	16	4	10 x DC	2			**305**		
0,5	0,40	0,47	5,50	45	16	4	11 x DC	2			**405**		
0,5	0,40	0,47	6,00	45	16	4	12 x DC	2			**505**		
0,5	0,40	0,47	7,00	45	16	4	14 x DC	2			**605**		
0,5	0,40	0,47	8,00	45	16	4	16 x DC	2			**705**		
0,5	0,40	0,47	9,00	45	16	4	18 x DC	2			**805**		
0,5	0,40	0,47	10,00	50	16	4	20 x DC	2					**305**
0,6	0,40	0,57	12,00	50	16	4	20 x DC	2					**306**
0,6	0,48	0,57	1,00	45	16	4	1,6 x DC	2	**306**				
0,6	0,48	0,57	2,00	45	16	4	3,3 x DC	2	**406**				
0,6	0,48	0,57	3,00	45	16	4	5 x DC	2	**506**				
0,6	0,48	0,57	4,00	45	16	4	6,6 x DC	2	**606**				
0,6	0,48	0,57	5,00	45	16	4	8,3 x DC	2	**706**				
0,6	0,48	0,57	6,00	45	16	4	10 x DC	2			**306**		
0,6	0,48	0,57	8,00	45	16	4	13,3 x DC	2			**406**		
0,6	0,48	0,57	10,00	50	16	4	16,6 x DC	2				**306**	
0,8	0,64	0,77	2,00	45	16	4	2,5 x DC	2	**308**				
0,8	0,64	0,77	3,00	45	16	4	3,75 x DC	2	**408**				
0,8	0,64	0,77	4,00	45	16	4	5 x DC	2	**508**				
0,8	0,64	0,77	5,00	45	16	4	6,2 x DC	2	**608**				
0,8	0,64	0,77	6,00	45	16	4	7,5 x DC	2	**708**				
0,8	0,64	0,77	7,00	45	16	4	8,7 x DC	2	**808**				
0,8	0,64	0,77	8,00	45	16	4	10 x DC	2			**308**		
0,8	0,64	0,77	9,00	45	16	4	11,2 x DC	2			**408**		
0,8	0,64	0,77	10,00	50	16	4	12,5 x DC	2				**308**	
1,0	0,80	0,96	3,00	45	16	4	3 x DC	2	**310**				
1,0	0,80	0,96	4,00	45	16	4	4 x DC	2	**410**				
1,0	0,80	0,96	5,00	45	16	4	5 x DC	2	**510**				
1,0	0,80	0,96	6,00	45	16	4	6 x DC	2	**610**				
1,0	0,80	0,96	7,00	45	16	4	7 x DC	2	**710**				
1,0	0,80	0,96	8,00	45	16	4	8 x DC	2	**810**				
1,0	0,80	0,96	9,00	45	16	4	9 x DC	2	**910**				
1,0	0,80	0,96	10,00	45	16	4	10 x DC	2			**310**		
1,0	0,80	0,96	12,00	45	16	4	12 x DC	2			**410**		
1,0	0,80	0,96	14,00	50	16	4	14 x DC	2				**310**	
1,0	0,80	0,96	16,00	50	16	4	16 x DC	2				**410**	
1,2	0,96	1,16	6,00	45	16	4	5 x DC	2	**312**				
1,2	0,96	1,16	8,00	45	16	4	6,6 x DC	2	**412**				
1,2	0,96	1,16	10,00	45	16	4	8,3 x DC	2	**512**				

P	●	●	●	●	●
M					
K					
N					
S					
H	●	●	●	●	●
O					

→ v_c/f_z Page 422+423

Continued on next page

BlueLine – Micro-ball nosed cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

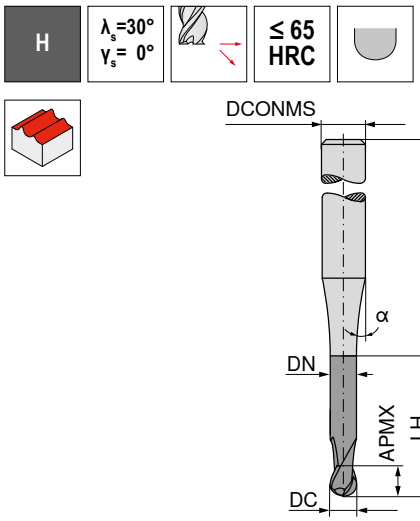

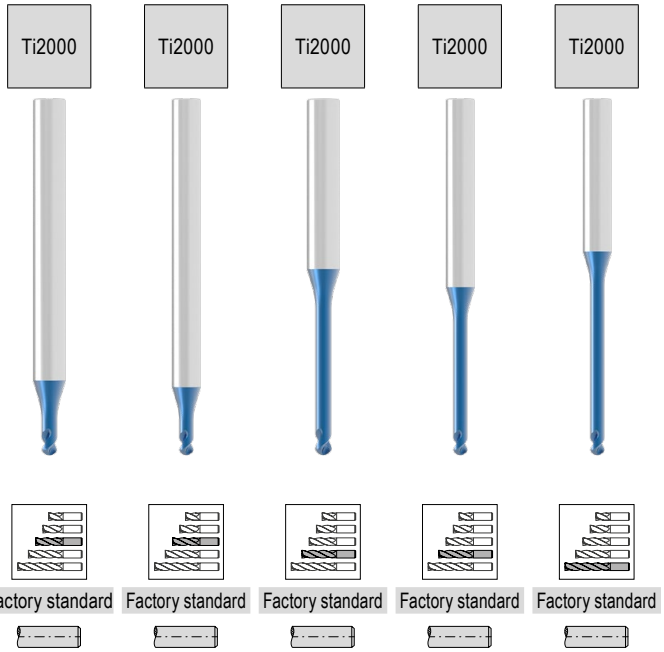

DC $_{-0,01}$ mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	T_X	ZEFP	52 356 ...	52 358 ...	52 357 ...	52 359 ...	52 360 ...
1,2	0,96	1,16	12,00	45	16	4	10 x DC	2			**312**		
1,2	0,96	1,16	14,00	50	16	4	11,6 x DC	2				**312**	
1,2	0,96	1,16	16,00	50	16	4	13,3 x DC	2				**412**	
1,4	1,12	1,34	8,00	45	16	4	5,7 x DC	2	**314**				
1,4	1,12	1,34	12,00	45	16	4	8,5 x DC	2	**414**				
1,4	1,12	1,34	16,00	50	16	4	11,4 x DC	2				**314**	
1,5	1,20	1,44	3,00	45	16	4	2 x DC	2	**315**				
1,5	1,20	1,44	4,00	45	16	4	2,6 x DC	2	**415**				
1,5	1,20	1,44	6,00	45	16	4	4 x DC	2	**515**				
1,5	1,20	1,44	8,00	45	16	4	5,3 x DC	2	**615**				
1,5	1,20	1,44	10,00	45	16	4	6,6 x DC	2	**715**				
1,5	1,20	1,44	12,00	45	16	4	8 x DC	2	**815**				
1,5	1,20	1,44	14,00	50	16	4	9,3 x DC	2		**315**			
1,5	1,20	1,44	16,00	50	16	4	10,6 x DC	2				**315**	
1,6	1,28	1,54	8,00	45	16	4	5 x DC	2	**316**				
1,6	1,28	1,54	12,00	45	16	4	7,5 x DC	2	**416**				
1,6	1,28	1,54	16,00	50	16	4	10 x DC	2				**316**	
1,8	1,44	1,74	8,00	45	16	4	4,4 x DC	2	**318**				
1,8	1,44	1,74	12,00	45	16	4	6,6 x DC	2	**418**				
1,8	1,44	1,74	16,00	50	16	4	8,8 x DC	2		**318**			
2,0	1,60	1,94	3,00	45	16	4	1,5 x DC	2	**320**				
2,0	1,60	1,94	4,00	45	16	4	2 x DC	2	**420**				
2,0	1,60	1,94	6,00	45	16	4	3 x DC	2	**520**				
2,0	1,60	1,94	8,00	45	16	4	4 x DC	2	**620**				
2,0	1,60	1,94	10,00	45	16	4	5 x DC	2	**720**				
2,0	1,60	1,94	12,00	45	16	4	6 x DC	2	**820**				
2,0	1,60	1,94	14,00	50	16	4	7 x DC	2		**320**			
2,0	1,60	1,94	16,00	50	16	4	8 x DC	2		**420**			
2,5	2,00	2,41	10,00	45	16	4	4 x DC	2	**325**				
2,5	2,00	2,41	15,00	50	16	4	6 x DC	2		**325**			
3,0	3,50	2,92	8,00	45	16	4	2,6 x DC	2	**330**				
3,0	3,50	2,92	10,00	45	16	4	3,3 x DC	2	**430**				
3,0	3,50	2,92	12,00	45	16	4	4 x DC	2	**530**				
3,0	3,50	2,92	16,00	45	16	4	5,3 x DC	2	**630**				
3,0	3,50	2,92	16,00	50	16	4	5,3 x DC	2		**330**			
P									●	●	●	●	●
M													
K													
N													
S													
H									●	●	●	●	●
O													

→ v_c/f_z Page 422+423

BlueLine – Micro-torus cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





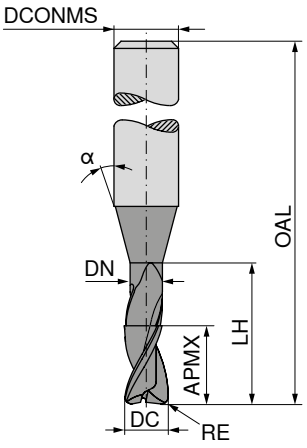

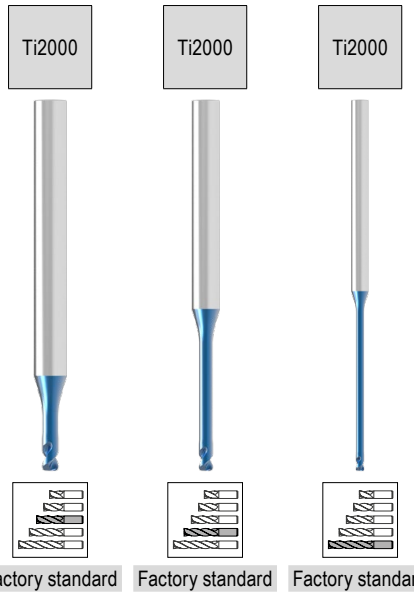

Factory standard | Factory standard | Factory standard

DC -0,012 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_x	ZEFP	52 349 ...	52 350 ...	52 351 ...
0,4	0,1	0,4	0,38	1,0	50	16	4	2,5 x DC	2	**30401**		
0,4	0,1	0,4	0,38	1,5	50	16	4	3,75 x DC	2	**40401**		
0,4	0,1	0,4	0,38	2,0	50	16	4	5 x DC	2	**50401**		
0,4	0,1	0,4	0,38	3,0	50	16	4	7,5 x DC	2	**60401**		
0,4	0,1	0,4	0,38	4,0	50	16	4	10 x DC	2		**30401**	
0,5	0,1	0,5	0,48	1,0	50	16	4	2 x DC	2	**30501**		
0,5	0,1	0,5	0,48	2,0	50	16	4	4 x DC	2	**40501**		
0,5	0,1	0,5	0,48	3,0	50	16	4	6 x DC	2	**50501**		
0,5	0,1	0,5	0,48	4,0	50	16	4	8 x DC	2	**60501**		
0,5	0,1	0,5	0,48	5,0	50	16	4	10 x DC	2		**30501**	
0,5	0,1	0,5	0,48	6,0	50	16	4	12 x DC	2		**40501**	
0,6	0,1	0,6	0,58	2,0	50	16	4	3,3 x DC	2	**30601**		
0,6	0,1	0,6	0,58	3,0	50	16	4	5 x DC	2	**40601**		
0,6	0,1	0,6	0,58	4,0	50	16	4	6,6 x DC	2	**50601**		
0,6	0,1	0,6	0,58	6,0	50	16	4	10 x DC	2		**30601**	
0,6	0,1	0,6	0,58	8,0	50	16	4	13,3 x DC	2		**40601**	
0,7	0,1	0,7	0,68	4,0	50	16	4	5,7 x DC	2	**30701**		
0,7	0,1	0,7	0,68	6,0	50	16	4	8,5 x DC	2	**40701**		
0,8	0,1	0,8	0,78	4,0	50	16	4	5 x DC	2	**30801**		
0,8	0,1	0,8	0,78	6,0	50	16	4	7,5 x DC	2	**40801**		
0,8	0,2	0,8	0,78	4,0	50	16	4	5 x DC	2	**30802**		
0,8	0,2	0,8	0,78	6,0	50	16	4	7,5 x DC	2	**40802**		
1,0	0,1	1,0	0,95	2,0	50	16	4	2 x DC	2	**31001**		
1,0	0,1	1,0	0,95	4,0	50	16	4	4 x DC	2	**41001**		
1,0	0,1	1,0	0,95	6,0	50	16	4	6 x DC	2	**51001**		
1,0	0,1	1,0	0,95	8,0	50	16	4	8 x DC	2	**61001**		
1,0	0,1	1,0	0,95	10,0	50	16	4	10 x DC	2		**31001**	
1,0	0,1	1,0	0,95	12,0	54	16	4	12 x DC	2		**41001**	
1,0	0,1	1,0	0,95	16,0	60	16	4	16 x DC	2		**51001**	
1,0	0,1	1,0	0,95	20,0	60	16	4	20 x DC	2			**31001**
1,0	0,2	1,0	0,95	2,0	50	16	4	2 x DC	2	**31002**		
1,0	0,2	1,0	0,95	4,0	50	16	4	4 x DC	2	**41002**		
1,0	0,2	1,0	0,95	6,0	50	16	4	6 x DC	2	**51002**		
1,0	0,2	1,0	0,95	8,0	50	16	4	8 x DC	2	**61002**		
1,0	0,2	1,0	0,95	10,0	50	16	4	10 x DC	2		**31002**	
1,0	0,2	1,0	0,95	12,0	54	16	4	12 x DC	2		**41002**	
1,0	0,2	1,0	0,95	16,0	60	16	4	16 x DC	2		**51002**	
1,0	0,2	1,0	0,95	20,0	60	16	4	20 x DC	2			**31002**
1,0	0,3	1,0	0,95	2,0	50	16	4	2 x DC	2	**31003**		
1,0	0,3	1,0	0,95	4,0	50	16	4	4 x DC	2	**41003**		
1,0	0,3	1,0	0,95	6,0	50	16	4	6 x DC	2	**51003**		
1,0	0,3	1,0	0,95	8,0	50	16	4	8 x DC	2	**61003**		
1,0	0,3	1,0	0,95	10,0	50	16	4	10 x DC	2		**31003**	
1,0	0,3	1,0	0,95	12,0	54	16	4	12 x DC	2		**41003**	
1,0	0,3	1,0	0,95	16,0	60	16	4	16 x DC	2		**51003**	

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

14

Continued on next page

BlueLine – Micro-torus cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





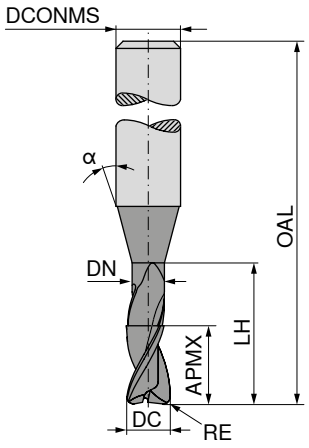

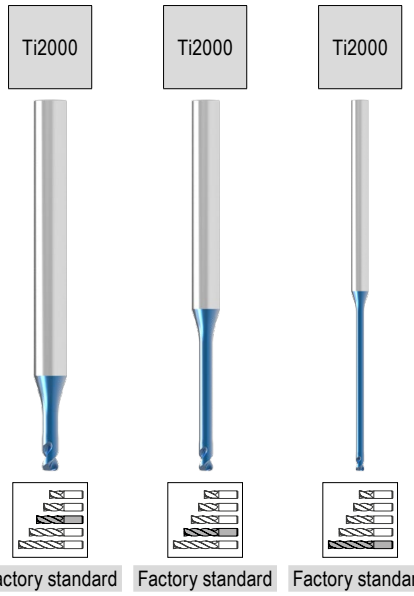

Factory standard | Factory standard | Factory standard

DC -0,012 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_x	ZEFP	52 349 ...	52 350 ...	52 351 ...
1,0	0,3	1,0	0,95	20,0	60	16	4	20 x DC	2			**31003**
1,2	0,2	1,2	1,14	6,0	50	16	4	5 x DC	2	**31202**		
1,2	0,2	1,2	1,14	12,0	54	16	4	10 x DC	2		**31202**	
1,2	0,2	1,2	1,14	20,0	60	16	4	16,6 x DC	2		**41202**	
1,2	0,3	1,2	1,14	6,0	50	16	4	5 x DC	2	**31203**		
1,2	0,3	1,2	1,14	12,0	54	16	4	10 x DC	2		**31203**	
1,2	0,3	1,2	1,14	20,0	60	16	4	16,6 x DC	2		**41203**	
1,5	0,2	1,5	1,44	4,0	50	16	4	2,6 x DC	2	**31502**		
1,5	0,2	1,5	1,44	6,0	50	16	4	4 x DC	2	**41502**		
1,5	0,2	1,5	1,44	8,0	50	16	4	5,3 x DC	2	**51502**		
1,5	0,2	1,5	1,44	10,0	50	16	4	6,6 x DC	2	**61502**		
1,5	0,2	1,5	1,44	12,0	54	16	4	8 x DC	2	**71502**		
1,5	0,2	1,5	1,44	16,0	54	16	4	10,6 x DC	2		**31502**	
1,5	0,2	1,5	1,44	20,0	60	16	4	13,3 x DC	2		**41502**	
1,5	0,3	1,5	1,44	4,0	50	16	4	2,6 x DC	2	**31503**		
1,5	0,3	1,5	1,44	6,0	50	16	4	4 x DC	2	**41503**		
1,5	0,3	1,5	1,44	8,0	50	16	4	5,3 x DC	2	**51503**		
1,5	0,3	1,5	1,44	10,0	50	16	4	6,6 x DC	2	**61503**		
1,5	0,3	1,5	1,44	12,0	54	16	4	8 x DC	2	**71503**		
1,5	0,3	1,5	1,44	16,0	54	16	4	10,6 x DC	2		**31503**	
1,5	0,3	1,5	1,44	20,0	60	16	4	13,3 x DC	2		**41503**	
1,5	0,5	1,5	1,44	4,0	50	16	4	2,6 x DC	2	**31505**		
1,5	0,5	1,5	1,44	6,0	50	16	4	4 x DC	2	**41505**		
1,5	0,5	1,5	1,44	8,0	50	16	4	5,3 x DC	2	**51505**		
1,5	0,5	1,5	1,44	10,0	50	16	4	6,6 x DC	2	**61505**		
1,5	0,5	1,5	1,44	12,0	54	16	4	8 x DC	2	**71505**		
1,5	0,5	1,5	1,44	16,0	54	16	4	10,6 x DC	2		**31505**	
1,5	0,5	1,5	1,44	20,0	60	16	4	13,3 x DC	2		**41505**	
2,0	0,1	2,0	1,91	4,0	50	16	4	2 x DC	2	**32001**		
2,0	0,1	2,0	1,91	6,0	50	16	4	3 x DC	2	**42001**		
2,0	0,1	2,0	1,91	8,0	50	16	4	4 x DC	2	**52001**		
2,0	0,1	2,0	1,91	10,0	50	16	4	5 x DC	2	**62001**		
2,0	0,1	2,0	1,91	12,0	54	16	4	6 x DC	2	**72001**		
2,0	0,1	2,0	1,91	16,0	54	16	4	8 x DC	2	**82001**		
2,0	0,1	2,0	1,91	20,0	60	16	4	10 x DC	2		**32001**	
2,0	0,1	2,0	1,91	26,0	70	16	4	13 x DC	2		**42001**	
2,0	0,2	2,0	1,91	4,0	50	16	4	2 x DC	2	**32002**		
2,0	0,2	2,0	1,91	6,0	50	16	4	3 x DC	2	**42002**		
2,0	0,2	2,0	1,91	8,0	50	16	4	4 x DC	2	**52002**		
2,0	0,2	2,0	1,91	10,0	50	16	4	5 x DC	2	**62002**		
2,0	0,2	2,0	1,91	12,0	54	16	4	6 x DC	2	**72002**		
2,0	0,2	2,0	1,91	16,0	54	16	4	8 x DC	2	**82002**		
2,0	0,2	2,0	1,91	20,0	60	16	4	10 x DC	2		**32002**	
2,0	0,2	2,0	1,91	26,0	70	16	4	13 x DC	2		**42002**	
2,0	0,3	2,0	1,91	4,0	50	16	4	2 x DC	2	**32003**		

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

Continued on next page

BlueLine – Micro-torus cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





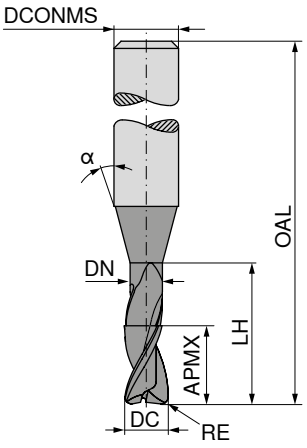

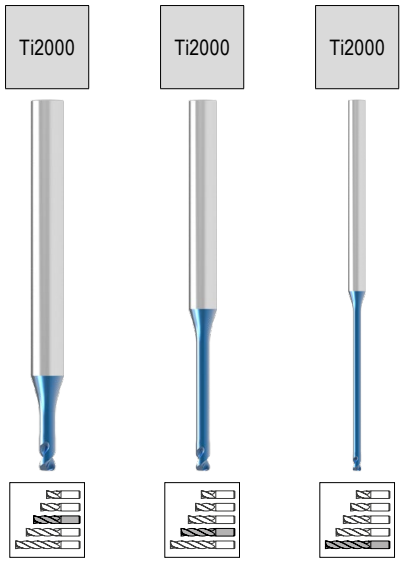

Factory standard | Factory standard | Factory standard



DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	52 349 ...	52 350 ...	52 351 ...
mm	mm	mm	mm	mm	mm		mm					
2,0	0,3	2,0	1,91	6,0	50	16	4	3 x DC	2	**42003**		
2,0	0,3	2,0	1,91	8,0	50	16	4	4 x DC	2	**52003**		
2,0	0,3	2,0	1,91	10,0	50	16	4	5 x DC	2	**62003**		
2,0	0,3	2,0	1,91	12,0	54	16	4	6 x DC	2	**72003**		
2,0	0,3	2,0	1,91	16,0	54	16	4	8 x DC	2	**82003**		
2,0	0,3	2,0	1,91	20,0	60	16	4	10 x DC	2		**32003**	
2,0	0,3	2,0	1,91	26,0	70	16	4	13 x DC	2		**42003**	
2,0	0,5	2,0	1,91	4,0	50	16	4	2 x DC	2	**32005**		
2,0	0,5	2,0	1,91	6,0	50	16	4	3 x DC	2	**42005**		
2,0	0,5	2,0	1,91	8,0	50	16	4	4 x DC	2	**52005**		
2,0	0,5	2,0	1,91	10,0	50	16	4	5 x DC	2	**62005**		
2,0	0,5	2,0	1,91	12,0	54	16	4	6 x DC	2	**72005**		
2,0	0,5	2,0	1,91	16,0	54	16	4	8 x DC	2	**82005**		
2,0	0,5	2,0	1,91	20,0	60	16	4	10 x DC	2		**32005**	
2,0	0,5	2,0	1,91	26,0	70	16	4	13 x DC	2		**42005**	
2,5	0,3	2,5	2,41	10,0	50	16	4	4 x DC	2	**32503**		
2,5	0,3	2,5	2,41	12,0	60	16	4	4,8 x DC	2	**42503**		
2,5	0,3	2,5	2,41	30,0	70	16	4	12 x DC	2		**32503**	
2,5	0,5	2,5	2,41	10,0	50	16	4	4 x DC	2	**32505**		
2,5	0,5	2,5	2,41	12,0	60	16	4	4,8 x DC	2	**42505**		
2,5	0,5	2,5	2,41	30,0	70	16	4	12 x DC	2		**32505**	
3,0	0,3	3,0	2,92	10,0	50	16	4	3,3 x DC	2	**33003**		
3,0	0,3	3,0	2,92	12,0	50	16	4	4 x DC	2	**43003**		
3,0	0,3	3,0	2,92	30,0	70	16	4	10 x DC	2		**33003**	
3,0	0,5	3,0	2,92	10,0	50	16	4	3,3 x DC	2	**33005**		
3,0	0,5	3,0	2,92	12,0	50	16	4	4 x DC	2	**43005**		
3,0	0,5	3,0	2,92	30,0	70	16	4	10 x DC	2		**33005**	
P										●	●	●
M												
K												
N												
S												
H										●	●	●
O												

14

→ v_c/f_z Page 420+421

BlueLine – End milling cutter

The all-rounder for machining tempered steel

H | λ_s=30° γ_s= 0° | ≤ 65 HRC



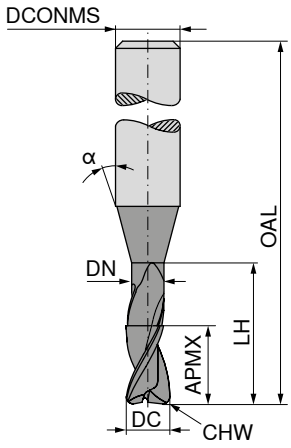

Ti2000

Factory standard

52 344 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	CHW mm	ZEFP	
0,5	1,5			58	12	6	0,02	2	**905**
1,0	3,0			58	12	6	0,02	2	**010**
1,5	4,0			58	12	6	0,03	2	**015**
2,0	5,0	1,8	12	58	20	6	0,03	2	**020**
2,5	6,0	2,3	13	58	20	6	0,04	2	**025**
3,0	8,0	2,8	15	58	20	6	0,04	2	**030**
3,5	8,0	3,3	15	58	20	6	0,05	2	**035**
4,0	11,0	3,8	15	58	20	6	0,05	2	**040**
5,0	13,0	4,8	21	58	20	6	0,06	2	**050**
6,0	16,0	5,8	24	58		6	0,07	2	**060**
8,0	19,0	7,8	27	64		8	0,08	2	**080**
10,0	22,0	9,8	32	73		10	0,10	2	**100**
12,0	26,0	11,8	38	84		12	0,13	2	**120**
16,0	32,0	15,7	44	93		16	0,18	2	**160**
20,0	38,0	19,7	54	104		20	0,20	2	**200**

P	●
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 424+425

BlueLine – End milling cutter with corner radius

The all-rounder for machining tempered steel

H | λ_s=30° γ_s= 0° | ≤ 65 HRC



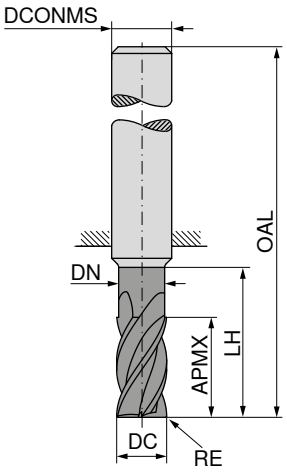

Factory standard | Factory standard

DC e8 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	52 353 ...	52 354 ...
1	0,10	1,5	0,85	10	50	3	4	31001	
1	0,10	1,5	0,85	20	75	3	4		31001
1	0,20	1,5	0,85	10	50	3	4	31002	
1	0,20	1,5	0,85	20	75	3	4		31002
2	0,20	2,5	1,80	12	50	3	4	32002	
2	0,20	2,5	1,80	25	75	3	4		32002
2	0,30	2,5	1,80	12	50	3	4	32003	
2	0,30	2,5	1,80	25	75	3	4		32003
2	0,50	2,5	1,80	12	50	3	4	32005	
2	0,50	2,5	1,80	25	75	3	4		32005
3	0,25	4,0	2,70	14	50	3	4	33002	
3	0,25	4,0	2,70	32	75	3	4		33002
3	0,30	4,0	2,70	14	50	3	4	33003	
3	0,30	4,0	2,70	32	75	3	4		33003
3	0,50	4,0	2,70	14	50	3	4	33005	
3	0,50	4,0	2,70	32	75	3	4		33005
3	1,00	4,0	2,70	14	50	3	4	33010	
3	1,00	4,0	2,70	32	75	3	4		33010
4	0,20	5,0	3,70	16	50	4	4	44002	
4	0,20	5,0	3,70	36	75	4	4		44002
4	0,25	5,0	3,70	16	50	4	4	44003	
4	0,25	5,0	3,70	36	75	4	4		44003
4	0,40	5,0	3,70	16	50	4	4	44004	
4	0,40	5,0	3,70	36	75	4	4		44004
4	0,50	5,0	3,70	16	50	4	4	44005	
4	0,50	5,0	3,70	36	75	4	4		44005
4	1,00	5,0	3,70	16	50	4	4	44010	
4	1,00	5,0	3,70	36	75	4	4		44010
5	0,25	6,0	4,60	18	54	5	4	55002	
5	0,25	6,0	4,60	40	75	5	4		55002
5	0,50	6,0	4,60	18	54	5	4	55005	
5	0,50	6,0	4,60	40	75	5	4		55005
5	1,00	6,0	4,60	18	54	5	4	55010	
5	1,00	6,0	4,60	40	75	5	4		55010
6	0,25	7,0	5,50	21	58	6	4	06002	
6	0,25	7,0	5,50	44	80	6	4		06002
6	0,50	7,0	5,50	21	58	6	4	06005	
6	0,50	7,0	5,50	44	80	6	4		06005
6	0,80	7,0	5,50	21	58	6	4	06008	
6	1,00	7,0	5,50	21	58	6	4	06010	
6	1,00	7,0	5,50	44	80	6	4		06010
6	1,50	7,0	5,50	21	58	6	4	06015	
6	1,50	7,0	5,50	44	80	6	4		06015
6	2,00	7,0	5,50	21	58	6	4	06020	
8	0,25	9,0	7,40	27	64	8	4	08002	

P	●	●
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 426+427

Continued on next page

BlueLine – End milling cutter with corner radius

The all-rounder for machining tempered steel

H | λ_s=30° γ_s= 0° | ≤ 65 HRC



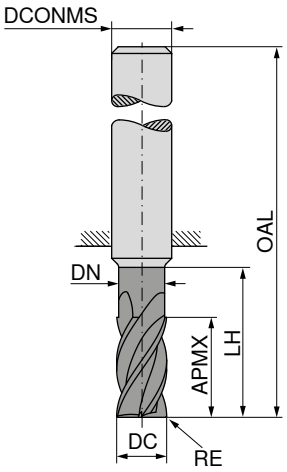

Factory standard | Factory standard

DC e8 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	52 353 ...	52 354 ...
8	0,25	9,0	7,40	54	100	8	4		08002
8	0,50	9,0	7,40	27	64	8	4	08005	
8	0,50	9,0	7,40	54	100	8	4		08005
8	0,80	9,0	7,40	27	64	8	4	08008	
8	0,80	9,0	7,40	54	100	8	4		08008
8	1,00	9,0	7,40	27	64	8	4	08010	
8	1,00	9,0	7,40	54	100	8	4		08010
8	1,50	9,0	7,40	27	64	8	4	08015	
8	1,50	9,0	7,40	54	100	8	4		08015
8	2,00	9,0	7,40	27	64	8	4	08020	
8	2,00	9,0	7,40	54	100	8	4		08020
8	2,50	9,0	7,40	27	64	8	4	08025	
8	3,00	9,0	7,40	27	64	8	4	08030	
8	3,00	9,0	7,40	54	100	8	4		08030
10	0,25	11,0	9,20	32	73	10	4	10002	
10	0,25	11,0	9,20	60	100	10	4		10002
10	0,50	11,0	9,20	32	73	10	4	10005	
10	0,50	11,0	9,20	60	100	10	4		10005
10	0,80	11,0	9,20	32	73	10	4	10008	
10	0,80	11,0	9,20	60	100	10	4		10008
10	1,00	11,0	9,20	32	73	10	4	10010	
10	1,00	11,0	9,20	60	100	10	4		10010
10	1,50	11,0	9,20	32	73	10	4	10015	
10	1,50	11,0	9,20	60	100	10	4		10015
10	2,00	11,0	9,20	32	73	10	4	10020	
10	2,00	11,0	9,20	60	100	10	4		10020
10	3,00	11,0	9,20	32	73	10	4	10030	
10	3,00	11,0	9,20	60	100	10	4		10030
10	3,50	11,0	9,20	32	73	10	4	10035	
12	0,50	12,0	11,00	38	84	12	4	12005	
12	0,50	12,0	11,00	75	120	12	4		12005
12	1,00	12,0	11,00	38	84	12	4	12010	
12	1,00	12,0	11,00	75	120	12	4		12010
12	1,50	12,0	11,00	38	84	12	4	12015	
12	1,50	12,0	11,00	75	120	12	4		12015
12	2,00	12,0	11,00	38	84	12	4	12020	
12	2,00	12,0	11,00	75	120	12	4		12020
12	3,00	12,0	11,00	38	84	12	4	12030	
12	3,00	12,0	11,00	75	120	12	4		12030
16	2,00	16,0	15,00	44	93	16	4	16020	
16	2,00	16,0	15,00	92	150	16	4		16020
16	3,00	16,0	15,00	44	93	16	4	16030	
16	3,00	16,0	15,00	92	150	16	4		16030

P	●	●
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 426+427

BlueLine – End milling cutter with corner radius

The all-rounder for machining tempered steel

▲ With decreasing helix angle for reduced machining noise & vibration

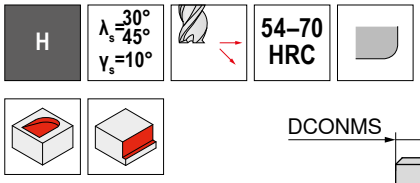

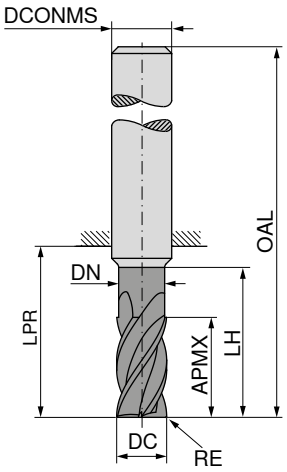

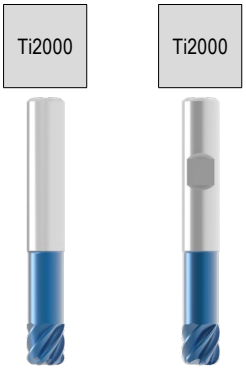



Factory standard | Factory standard

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 140 ...	52 141 ...
3	0,3	4	2,7	14	22	50	3	4	031	
3	0,5	4	2,7	14	22	50	3	4	033	
3	1,0	4	2,7	14	22	50	3	4	034	
4	0,4	5	3,7	16	22	50	4	4	042	
4	0,5	5	3,7	16	22	50	4	4	043	
4	1,0	5	3,7	16	22	50	4	4	044	
5	0,5	6	4,6	18	26	54	5	4	053	
5	1,0	6	4,6	18	26	54	5	4	054	
6	0,5	7	5,5	21	21	57	6	6	063	063
6	1,0	7	5,5	21	21	57	6	6	064	064
6	1,5	7	5,5	21	21	57	6	6	065	065
8	0,5	9	7,4	27	27	63	8	6	083	083
8	1,0	9	7,4	27	27	63	8	6	084	084
8	1,5	9	7,4	27	27	63	8	6	085	085
8	2,0	9	7,4	27	27	63	8	6	086	086
10	0,5	11	9,2	32	32	72	10	6	103	103
10	1,0	11	9,2	32	32	72	10	6	104	104
10	1,5	11	9,2	32	32	72	10	6	105	105
10	2,0	11	9,2	32	32	72	10	6	106	106
12	0,5	12	11,0	38	38	83	12	6	123	123
12	1,0	12	11,0	38	38	83	12	6	124	124
12	1,5	12	11,0	38	38	83	12	6	125	125
12	2,0	12	11,0	38	38	83	12	6	126	126
16	1,0	16	15,0	44	45	93	16	6	161	161
16	2,0	16	15,0	44	45	93	16	6	163	163
20	1,0	20	18,5	50	54	104	20	6	201	201
20	2,5	20	18,5	50	54	104	20	6	204	204
P									○	○
M										
K										
N										
S										
H									●	●
O										

→ v_c/f_z Page 424+425

BlueLine – Finish milling cutter

The all-rounder for machining tempered steel

▲ With decreasing helix angle for reduced machining noise & vibration

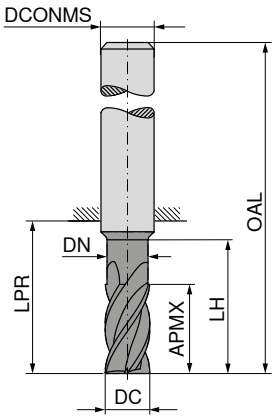



Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	LPR mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	52 133 ...	52 134 ...	52 135 ...	52 136 ...	52 348 ...
2	8	22			58	6	4	**020**	**020**			
3	12	22			58	6	4	**030**	**030**			
4	13	22			58	6	4	**040**	**040**			
5	15	22			58	6	6	**050**	**050**			
6	16	22			58	6	6	**060**	**060**			
6	16	44	5,8	40	80	6	6					**060**
6	21	29			65	6	6			**060**	**060**	
8	19	64	7,7	50	100	8	6					**080**
8	22	34			70	8	6	**080**	**080**			
8	28	39			75	8	6			**080**	**080**	
10	25	33			73	10	6	**100**	**100**			
10	25	60	9,7	60	100	10	6					**100**
10	35	45			85	10	6			**100**	**100**	
12	28	39			84	12	6	**120**	**120**			
12	30	75	11,6	60	120	12	6					**120**
12	45	55			100	12	6			**120**	**120**	
14	30	39			84	14	6	**140**	**140**			
14	45	55			100	14	6			**140**	**140**	
16	35	45			93	16	8	**160**	**160**			
16	40	102	15,6	100	150	16	8					**160**
16	50	62			110	16	8			**160**	**160**	
16	65	77			125	16	8			**161**	**161**	
18	35	45			93	18	10	**180**	**180**			
18	54	66			114	18	10			**180**	**180**	
20	40	54			104	20	10	**200**	**200**			
20	50	100	19,6	100	150	20	10					**200**
20	55	76			126	20	10			**200**	**200**	
20	70	85			135	20	10			**201**	**201**	

P	○	○	○	○	●
M					
K					
N					
S					
H	●	●	●	●	●
O					

→ v_c/f_z Page 424–426

BlueLine – Finish milling cutter with corner radius

The all-rounder for machining tempered steel

H | λ_s=30° 45° | γ_s= 0° | 54–70 HRC

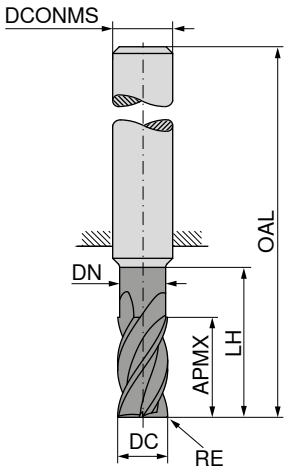

Factory standard

Factory standard

DC e8 mm	RE +/-0,005 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	52 324 ...	52 325 ...
5	0,5	15	4,8	19	58	6	6	052	
5	1,0	15	4,8	19	58	6	6	053	
6	0,5	16	5,8	20	58	6	6	062	
6	0,5	21	5,8	29	65	6	6		062
6	1,0	16	5,8	20	58	6	6	063	
6	1,0	21	5,8	29	65	6	6		063
8	0,5	22	7,8	26	70	8	6	082	
8	0,5	28	7,8	39	75	8	6		082
8	1,0	22	7,8	26	70	8	6	083	
8	1,0	28	7,8	39	75	8	6		083
10	0,5	25	9,8	31	73	10	6	102	
10	0,5	35	9,8	45	85	10	6		102
10	1,0	25	9,8	31	73	10	6	103	
10	1,0	35	9,8	45	85	10	6		103
10	1,5	25	9,8	31	73	10	6	104	
10	1,5	35	9,8	45	85	10	6		104
12	0,5	28	11,8	37	84	12	6	122	
12	0,5	45	11,8	55	100	12	6		122
12	1,0	28	11,8	37	84	12	6	123	
12	1,0	45	11,8	55	100	12	6		123
12	1,5	28	11,8	37	84	12	6	124	
12	1,5	45	11,8	55	100	12	6		124
14	1,0	30	13,8	37	84	14	6	143	
14	1,0	45	13,8	55	100	14	6		143
16	1,0	35	15,8	43	93	16	8	163	
16	1,0	50	15,8	62	110	16	8		163
16	2,0	35	15,8	43	93	16	8	165	
16	2,0	50	15,8	62	110	16	8		165
18	1,0	35	17,8	43	93	18	10	183	
18	1,0	54	17,8	66	114	18	10		183
20	1,0	40	19,8	52	104	20	10	203	
20	1,0	55	19,8	76	126	20	10		203
20	2,0	40	19,8	52	104	20	10	205	
20	2,0	55	19,8	76	126	20	10		205

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 424+425

14

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | 54–70 HRC | Ti2000

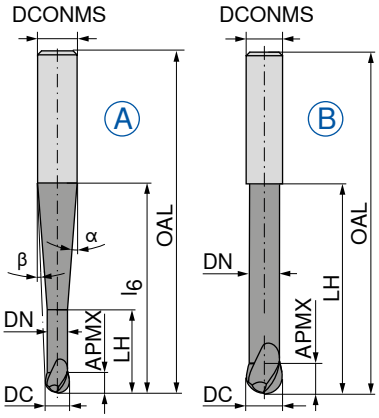

Factory standard

52 302 ...

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	
1,0	1,00	0,95	10	16,5	57	15	9	6	2	A	**010**
1,5	1,25	1,40	12	18,0	57	15	7,5	6	2	A	**015**
2,0	1,50	1,90	16	20,0	57	15	6	6	2	A	**020**
3,0	2,00	2,90	20	34,5	80	15	2,5	6	2	A	**030**
4,0	2,50	3,90	22	35,0	80	15	2	6	2	A	**040**
5,0	3,00	4,90	25	35,0	80	15	1	6	2	A	**050**
6,0	3,50	5,90	29		80			6	2	B	**060**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 428+429

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0.005 mm for Ø ≤ 6.0 mm / ± 0.01 mm for Ø > 6,0 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

H | λ_s=30° γ_s= 0° | 54–70 HRC



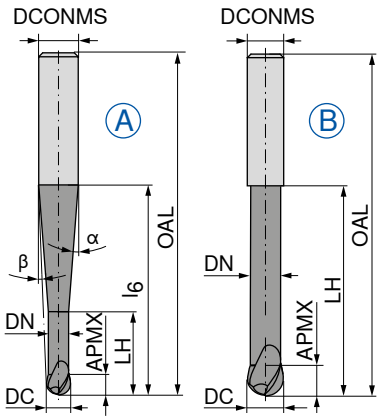

Ti2000

Factory standard

52 303 ...

DC mm	DC Tol.	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	
0,5	±0,01	1,0	0,45	2,0	20	57	10	8,5	6	2	A	**005**
1,0	±0,01	2,0	0,95	4,0	20	57	10	8	6	2	A	**010**
1,5	±0,01	2,5	1,40	7,5	20	57	12,5	7	6	2	A	**015**
2,0	±0,01	3,0	1,80	8,0	20	57	12	6,5	6	2	A	**020**
3,0	±0,01	3,5	2,80	10,0	20	57	11,5	5	6	2	A	**030**
4,0	±0,01	4,0	3,80	12,0	20	57	11	3,5	6	2	A	**040**
5,0	±0,01	5,0	4,70	14,0	20	57	10	2	6	2	A	**050**
6,0	±0,01	6,0	5,60	20,0		57			6	2	B	**060**
8,0	±0,02	7,0	7,60	25,0		63			8	2	B	**080**
10,0	±0,02	8,0	9,60	30,0		72			10	2	B	**100**
12,0	±0,02	10,0	11,50	35,0		83			12	2	B	**120**
12,0	±0,02	10,0	11,50	35,0	40	92	35	3,5	16	2	A	**121**
16,0	±0,02	12,0	15,50	40,0		92			16	2	B	**160**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 428+429

14

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

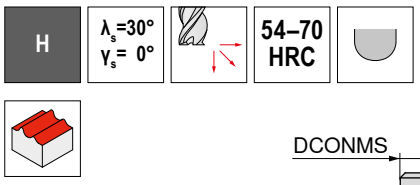

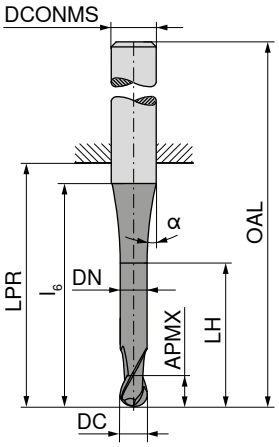

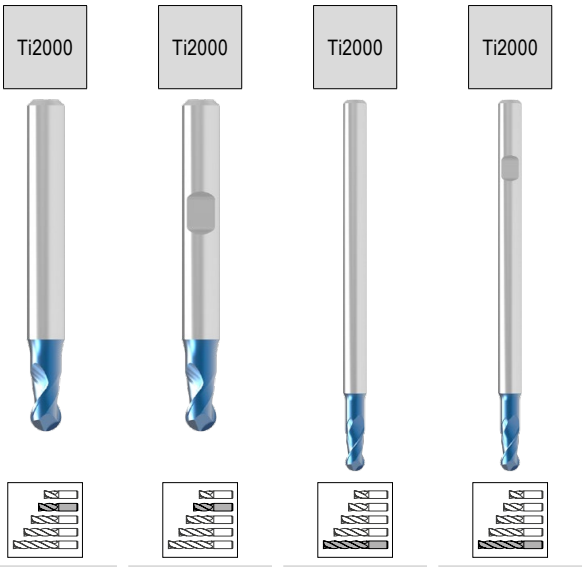

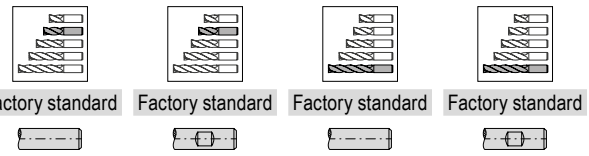

DC f8	APMX	DN	LH	l_6	LPR	OAL	DCONMS h6	α° ±0,5	ZEFP	52 256 ...	52 257 ...	52 258 ...	52 259 ...
mm	mm	mm	mm	mm	mm	mm	mm						
0,10	0,2			11	10	38	3	8	2	910			
0,15	0,3			12	10	38	3	7,5	2	915			
0,20	0,4			12	10	38	3	7	2	920			
0,25	0,5	0,20	0,8	12	10	38	3	7	2	925			
0,30	1,0	0,25	1,3	12	10	38	3	7	2	930			
0,35	1,0	0,30	1,3	12	10	38	3	7	2	935			
0,40	1,0	0,35	1,3	12	10	38	3	7	2	940			
0,50	1,5	0,40	2,0	12	10	38	3	7,5	2	950			
0,50	1,5	0,40	2,0	17	18	54	6	10,5	2	005	005		
0,50	1,5	0,40	2,0	13	47	75	3	7	2			950	
0,50	1,5	0,40	2,0	17	44	80	6	10,5	2			005	005
0,60	1,5	0,50	2,0	12	10	38	3	7	2	960			
0,70	2,0	0,60	2,5	12	10	38	3	7,5	2	970			
0,80	2,0	0,70	2,5	13	10	38	3	7,5	2	980			
0,90	2,5	0,80	3,5	13	10	38	3	7	2	990			
1,00	2,0	0,90	3,0	13	22	50	3	6	2	011			
1,00	2,0	0,90	3,0	18	18	54	6	9,5	2	106	010		
1,00	3,0	0,90	4,0	14	47	75	3	6	2			011	
1,00	3,0	0,90	4,0	19	44	80	6	9,5	2			010	010
1,10	3,0	1,00	4,0	13	22	50	3	7	2	911			
1,20	3,0	1,10	4,0	13	22	50	3	7	2	012			
1,40	3,0	1,30	4,0	14	22	50	3	5	2	014			
1,50	3,0	1,40	4,0	13	22	50	3	5,5	2	016			
1,50	3,0	1,40	4,0	18	18	54	6	9	2	156	015		
1,50	4,0	1,40	6,0	13	47	75	3	7	2			016	
1,50	4,0	1,40	6,0	19	44	80	6	10	2			015	015
1,60	4,0	1,50	5,0	13	22	50	3	5	2	916			
1,80	4,0	1,70	5,0	13	22	50	3	5	2	018			
2,00	4,0	1,90	5,5	12	22	50	3	5	2	021			
2,00	4,0	1,90	5,5	18	18	54	6	9	2	206	020		
2,00	6,0	1,90	8,0	12	47	75	3	8	2			021	
2,00	6,0	1,90	8,0	20	44	80	6	11	2			020	020
2,50	5,0	2,30	6,5	10	22	50	3	7	2	025			
2,50	5,0	2,30	6,5	17	18	54	6	10	2	026	026		
2,50	8,0	2,30	10,0	14	47	75	3	5,5	2			026	
2,50	8,0	2,30	10,0	20	44	80	6	10	2			025	025
3,00	6,0	2,80	8,0		22	50	3		2	031			
3,00	6,0	2,80	8,0	18	18	54	6	9	2	306	030		

P	○	○	○	○
M				
K				
N				
S				
H	●	●	●	●
O				

→ v_c/f_z Page 428+429

Continued on next page

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | 54–70 HRC

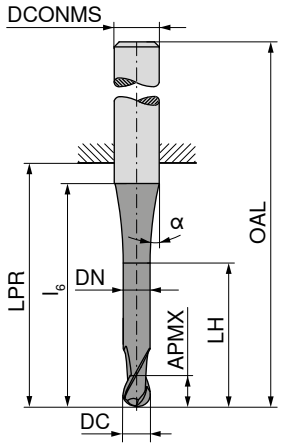

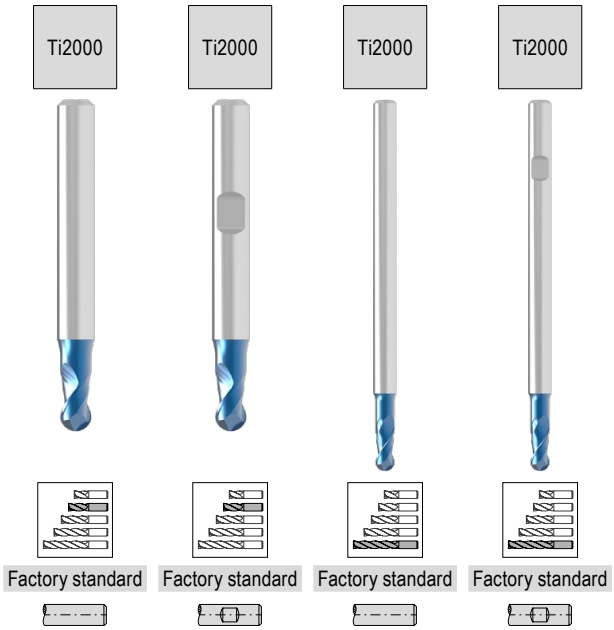

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h6 mm	α° ±0,5	ZEFP	52 256 ...		52 257 ...		52 258 ...		52 259 ...	
3,00	10,0	2,80	13,0		47	75	3		2						031		
3,00	10,0	2,80	15,0	23	44	80	6	11	2						030		030
4,00	7,0	3,80	10,0	18	18	54	6	11	2	406		040					
4,00	7,0	3,80	10,0		26	54	4		2	041							
4,00	13,0	3,80	20,0		47	75	4		2						041		
4,00	13,0	3,80	18,0	23	44	80	6	12,5	2						040		040
5,00	8,0	4,80	11,0	15	18	54	6	8	2	506		050					
5,00	8,0	4,80	11,0		26	54	5		2	051							
5,00	14,0	4,80	19,0		47	75	5		2						051		
5,00	14,0	4,80	19,0	21	64	100	6	13	2						050		050
6,00	10,0	5,80	15,0		18	54	6		2	061		060					
6,00	16,0	5,80	25,0		64	100	6		2						060		060
8,00	12,0	7,80	17,0		23	59	8		2	081		080					
8,00	22,0	7,80	35,0		64	100	8		2						080		080
10,00	13,0	9,80	18,0		27	67	10		2	101		100					
10,00	25,0	9,80	40,0		60	100	10		2						100		100
12,00	16,0	11,90	21,0		28	73	12		2	121		120					
12,00	26,0	11,80	40,0		55	100	12		2						120		120
14,00	16,0	13,80	21,0		30	75	14		2	141		140					
14,00	26,0	13,80	40,0		55	100	14		2						140		140
16,00	20,0	15,80	25,0		35	83	16		2	161		160					
16,00	30,0	15,80	50,0		102	150	16		2						160		160
20,00	25,0	19,80	30,0		43	93	20		2	201		200					
20,00	40,0	19,80	60,0		100	150	20		2						200		200
P										○		○		○		○	
M																	
K																	
N																	
S																	
H										●		●		●		●	
O																	

→ v_c/f_z Page 428+429

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | ≤ 65 HRC | Ti2000

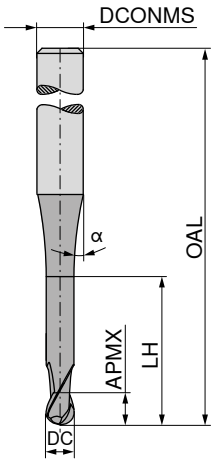

Factory standard

52 355 ...

DC f8 mm	APMX mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	
3	8	11	65	12	6	3	**030**
4	8	11	75	12	6	3	**040**
5	10	13	75	12	6	3	**050**
6	12		100		6	3	**060**
8	14		100		8	3	**080**
10	18		100		10	3	**100**
12	22		120		12	3	**120**

P	●
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 428

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | 54–70 HRC

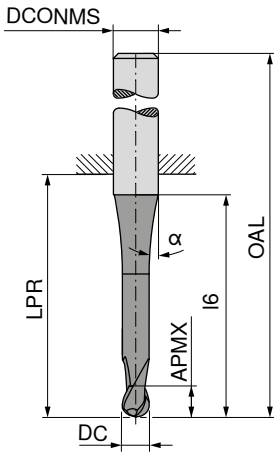

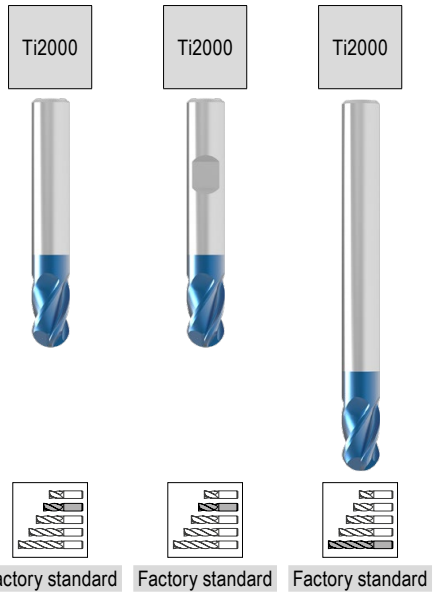

Factory standard | Factory standard | Factory standard



DC f8 mm	APMX mm	l_6 mm	LPR mm	OAL mm	α° ±1	DCONMS h6 mm	ZEFP	52 404 ...	52 405 ...	52 404 ...
2,0	4	10,0	22	50	8	3	4	020		
2,0	4	16,0	18	54	12	6	4	021	021	
2,0	4	10,0	47	75	8	3	4			022
2,0	4	16,0	44	80	12	6	4			023
2,5	5	16,0	18	54	12	6	4	025	025	
2,5	5	16,0	44	80	12	6	4			026
3,0	5		22	50		3	4	030		
3,0	5	14,0	18	54	12	6	4	031	031	
3,0	5		47	75		3	4			032
3,0	5	14,0	44	80	12	6	4			033
4,0	8	15,0	18	54	12	6	4	041	041	
4,0	8		26	54		4	4	040		
4,0	8		47	75		4	4			042
4,0	8	15,0	44	80	12	6	4			043
5,0	9	13,5	18	54	12	6	4	051	051	
5,0	9		26	54		5	4	050		
5,0	9		47	75		5	4			052
5,0	9	13,5	64	100	12	6	4			053
6,0	10		18	54		6	4	060	060	
6,0	10		64	100		6	4			062
7,0	12	15,0	23	59	12	8	4	070	070	
8,0	12		23	59		8	4	080	080	
8,0	12		64	100		8	4			082
9,0	14	17,0	27	67	12	10	4	090	090	
10,0	14	16,0	27	67		10	4	100	100	
10,0	14		60	100		10	4			102
12,0	16		29	74		12	4	120	120	
12,0	16		55	100		12	4			122
14,0	18		30	75		14	4	140	140	
14,0	18	20,0	55	100		14	4			142
16,0	22	24,0	35	83		16	4	160	160	
16,0	22	24,0	102	150		16	4			162
20,0	26	28,0	43	93		20	4	200	200	
20,0	26	28,0	100	150		20	4			202
P								○	○	○
M										
K										
N										
S										
H								●	●	●
O										

→ v_c/f_z Page 428+429

14

BlueLine – Torus Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm for Ø ≤ 6,0 mm / ± 0,01 mm for Ø > 6,0 mm
▲ or Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

H | λ_s=30° γ_s= 0° | 54–70 HRC

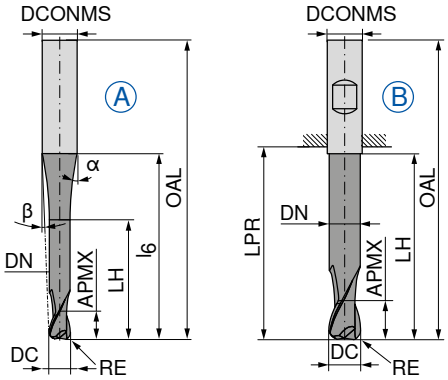

LPR with Shank DIN 6535 HB





Factory standard | Factory standard

DC ±0,01 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	l_6 mm	OAL mm	α° ±0,5	β°	DCONMS h5 mm	ZEFP	Fig.	52 305 ...	52 305 ...
1,0	0,2	1,00	0,95	10	21	16,5	57	23	9	6	2	A	**010**	
1,5	0,3	1,25	1,40	12	21	18,0	57	21	7,5	6	2	A	**015**	
2,0	0,4	1,50	1,90	16	21	20,0	57	25	6	6	2	A	**020**	
3,0	0,5	2,00	2,90	20	44	34,5	80	6	2,5	6	2	A	**030**	
4,0	0,6	2,50	3,90	22	44	35,0	80	4,5	2	6	2	A	**040**	
5,0	0,8	3,00	4,90	25	44	35,0	80	3,5	1	6	2	A	**050**	
6,0	1,0	3,50	5,90	29	44		80			6	2	B		**060**
P													○	○
M														
K														
N														
S														
H													●	●
O														

→ v_c/f_z Page 430+431

BlueLine – Torus Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm for Ø ≤ 6,0 mm / ± 0,01 mm for Ø > 6,0 mm
▲ or Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

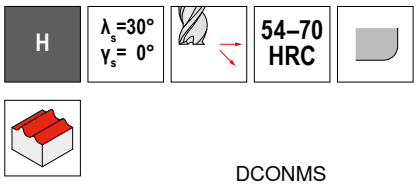

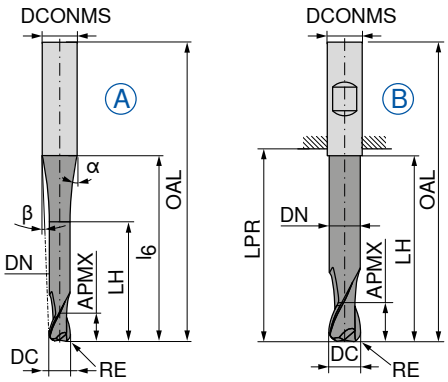

LPR with Shank DIN 6535 HB

Factory standard

Factory standard

DC mm	DC Tol.	RE mm	APMX mm	DN mm	LH mm	LPR mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	52 304 ...	52 304 ...
0,5	±0,01	0,10	1,0	0,45	2,0	21	20	57	10	8,5	6	2	A	**005**	
1,0	±0,01	0,25	2,0	0,95	4,0	21	20	57	10	8	6	2	A	**010**	
1,5	±0,01	0,30	2,5	1,40	7,5	21	20	57	12,5	7	6	2	A	**015**	
2,0	±0,01	0,50	3,0	1,80	8,0	21	20	57	12	6,5	6	2	A	**020**	
3,0	±0,01	0,50	3,5	2,80	10,0	21	20	57	11,5	5	6	2	A	**030**	
4,0	±0,01	1,00	4,0	3,80	12,0	21	20	57	11	3,5	6	2	A	**040**	
5,0	±0,01	1,50	5,0	4,70	14,0	21	20	57	10	2	6	2	A	**050**	
6,0	±0,01	2,00	6,0	5,60	20,0	21		57			6	2	B		**060**
8,0	±0,02	2,00	7,0	7,60	25,0	27		63			8	2	B		**080**
10,0	±0,02	3,00	8,0	9,60	30,0	32		72			10	2	B		**100**
12,0	±0,02	4,00	10,0	11,50	35,0	38		83			12	2	B		**120**
12,0	±0,02	4,00	10,0	11,50	35,0	44	40	92	37	3,5	16	2	A	**121**	
16,0	±0,02	5,00	12,0	15,50	40,0	44		92			16	2	B		**160**
P														○	○
M															
K															
N															
S															
H														●	●
O															

→ v_c/f_z Page 430+431

BlueLine – Torus Cutter

The all-rounder for machining tempered steel

H | λ_s=30° γ_s= 0° | ≤ 65 HRC | Ti2000

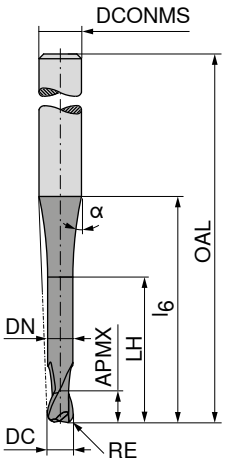

Factory standard

52 361 ...

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	DCONMS h5 mm	ZEFP	
0,8	0,08	1,0	0,75	1,6	27	75	1,5	3	2	**90801**
1,0	0,10	1,2	0,95	2,0	27	75	1,5	3	2	**31001**
1,0	0,25	2,0	0,85	4,0	40	80	1,5	6	2	**01002**
1,2	0,12	1,4	1,15	2,4	27	75	1,5	3	2	**31201**
1,5	0,15	1,8	1,45	3,0	27	75	1,5	3	2	**31501**
2,0	0,20	2,4	1,95	4,0	27	75	1,5	3	2	**32002**
2,0	0,50	2,0	1,80	8,0	40	80	1,5	6	2	**02005**
3,0	0,30	3,6	2,95	6,0	27	75	1,5	4	2	**43003**
3,0	0,50	2,0	2,80	12,0	40	80	1,5	6	2	**03005**
3,0	1,00	2,0	2,80	12,0	40	80	1,5	6	2	**03010**
4,0	1,00	3,0	3,80	16,0	40	80	1,5	6	2	**04010**
6,0	1,00	4,0	5,80	25,0	50	100	1,5	8	2	**06010**
6,0	2,00	4,0	5,80	25,0	50	100	1,5	8	2	**06020**
8,0	1,00	4,0	7,80	32,0	60	120	1,5	10	2	**08010**
8,0	2,00	4,0	7,80	32,0	60	120	1,5	10	2	**08020**
10,0	1,50	6,0	9,80	40,0	80	160	1,5	12	2	**10015**
12,0	1,50	8,0	11,80	50,0	100	200	1,5	16	2	**12015**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 430+431

BlueLine – NC deburring cutter

The all-rounder for machining tempered steel

▲ 52 562 ... / 52 563 ... – Point angle α = 60°
▲ 52 560 ... / 52 561 ... – Point angle α = 90°

H | λ_s = 0° γ_s=-5°

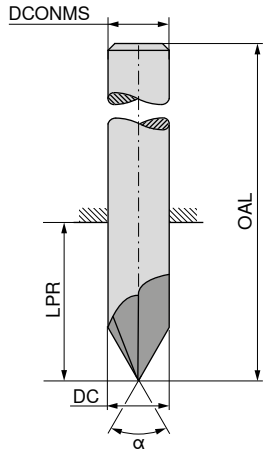

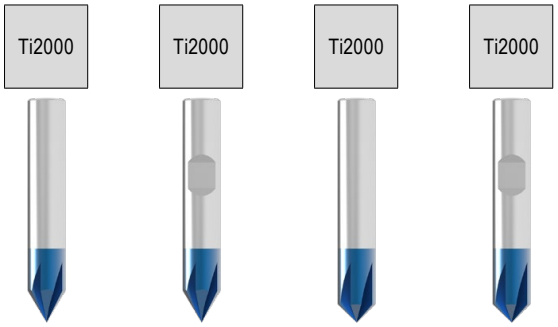

	α = 60°	α = 60°	α = 90°	α = 90°
	Factory standard	Factory standard	Factory standard	Factory standard
	52 562 ...	52 563 ...	52 560 ...	52 561 ...

DC mm	OAL mm	LPR mm	DCONMS mm	ZEFP				
4	50	22	4	5	**04000**		**04000**	
6	57	21	6	6	**06000**	**06000**	**06000**	**06000**
8	63	27	8	6	**08000**	**08000**	**08000**	**08000**
10	72	32	10	6	**10000**	**10000**	**10000**	**10000**
12	83	38	12	6	**12000**	**12000**	**12000**	**12000**
16	92	44	16	8	**16000**	**16000**	**16000**	**16000**

P	●	●	●	●
M				
K				
N				
S				
H	●	●	●	●
O				

→ v_c/f_z Page 419

14

Micro-end milling cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth





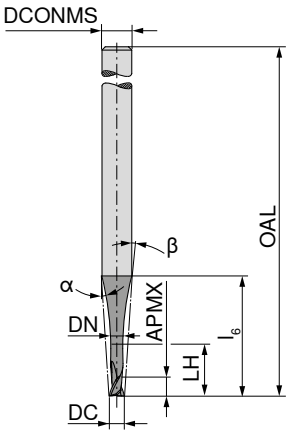

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	T_X	ZEFP	52 802 ...	52 802 ...
0,2	0,12	0,16	0,44	5,7	38	15	14	3	2,2 x DC	2	**021**	
0,2	0,20	0,16	1,00	6,4	38	15	13	3	5 x DC	2	**023**	
0,2	0,20	0,16	2,00	9,2	38	15	9	3	10 x DC	2	**025**	
0,2	0,20	0,16	0,44	5,7	43	15	14	3	2,2 x DC	2		**022**
0,2	0,20	0,16	1,00	6,4	43	15	13	3	5 x DC	2		**024**
0,2	0,20	0,16	2,00	9,2	43	15	9	3	10 x DC	2		**026**
0,3	0,18	0,24	0,66	5,8	38	16,5	14	3	2,2 x DC	2	**03100**	
0,3	0,30	0,24	1,50	6,9	38	16	11,5	3	5 x DC	2	**03300**	
0,3	0,30	0,24	3,00	9,7	38	13,5	8,5	3	10 x DC	2	**03500**	
0,4	0,24	0,32	0,88	5,8	38	16,5	13,5	3	2,2 x DC	2	**04100**	
0,4	0,40	0,32	2,00	7,4	38	15,5	10,5	3	5 x DC	2	**04300**	
0,4	0,40	0,32	4,00	10,2	38	14	8	3	10 x DC	2	**04500**	
0,5	0,30	0,40	1,10	5,8	38	15	13	3	2,2 x DC	2	**051**	
0,5	0,50	0,40	2,50	7,8	38	15	10	3	5 x DC	2	**053**	
0,5	0,50	0,40	5,00	10,7	38	13	7	3	10 x DC	2	**055**	
0,5	0,50	0,40	1,10	5,8	43	15	13	3	2,2 x DC	2		**052**
0,5	0,50	0,40	2,50	7,8	43	15	10	3	5 x DC	2		**054**
0,5	0,50	0,40	5,00	14,5	43	13	5	3	10 x DC	2		**056**
0,6	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	**06100**	
0,6	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	**06300**	
0,6	0,60	0,48	6,00	11,6	38	14	6,5	3	10 x DC	2	**06500**	
0,7	0,42	0,56	1,54	5,9	38	16,5	11,5	3	2,2 x DC	2	**07100**	
0,7	0,70	0,56	3,50	8,8	38	14,5	8	3	5 x DC	2	**07300**	
0,7	0,70	0,56	7,00	12,5	38	14	6	3	10 x DC	2	**07500**	
0,8	0,48	0,64	1,76	5,9	38	15	11	3	2,2 x DC	2	**081**	
0,8	0,80	0,64	4,00	9,0	38	15	7	3	5 x DC	2	**083**	
0,8	0,80	0,64	8,00	13,5	38	12	5	3	10 x DC	2	**085**	
0,8	0,80	0,64	1,76	5,9	43	15	11	3	2,2 x DC	2		**082**
0,8	0,80	0,64	4,00	9,0	43	15	7	3	5 x DC	2		**084**
0,8	0,80	0,64	8,00	15,5	43	9,8	5	3	10 x DC	2		**086**
0,9	0,54	0,72	1,98	5,9	38	17	10,5	3	2,2 x DC	2	**09100**	
0,9	0,90	0,72	4,50	9,5	38	14	7	3	5 x DC	2	**09300**	
0,9	0,90	0,72	9,00	14,4	38	13	5	3	10 x DC	2	**09500**	
1,0	0,60	0,80	2,20	5,9	38	15	10	3	2,2 x DC	2	**101**	
1,0	1,00	0,80	2,20	5,9	43	15	10	3	2,2 x DC	2		**102**
1,0	1,00	0,80	5,00	9,7	43	15	6	3	5 x DC	2	**103**	
1,0	1,00	0,80	10,00	15,3	43	11	4	3	10 x DC	2	**105**	
1,0	1,00	0,80	5,00	9,7	50	15	6	3	5 x DC	2		**104**
1,0	1,00	0,80	10,00	20,6	50	8,5	3	3	10 x DC	2		**106**
1,1	0,66	0,88	2,42	6,0	38	17	9,5	3	2,2 x DC	2	**11100**	
1,1	1,10	0,88	5,50	10,0	43	14	6	3	5 x DC	2	**11300**	

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-end milling cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth





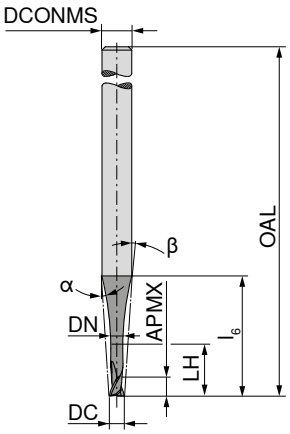

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	T_X	ZEFP	52 802 ...	52 802 ...
1,1	1,10	0,88	11,00	15,9	43	13	4	3	10 x DC	2	**11500**	
1,2	0,72	0,96	2,64	6,0	38	17	9	3	2,2 x DC	2	**12100**	
1,2	1,20	0,96	6,00	10,5	43	13,5	5,5	3	5 x DC	2	**12300**	
1,2	1,20	0,96	12,00	16,5	43	13,5	4	3	10 x DC	2	**12500**	
1,3	0,78	1,04	2,86	6,0	38	17	8,5	3	2,2 x DC	2	**13100**	
1,3	1,30	1,04	6,50	11,0	43	12,5	5	3	5 x DC	2	**13300**	
1,3	1,30	1,04	13,00	17,1	43	14	3,5	3	10 x DC	2	**13500**	
1,4	0,84	1,12	3,08	6,1	38	17	8	3	2,2 x DC	2	**14100**	
1,4	1,40	1,12	7,00	11,5	43	12	4,5	3	5 x DC	2	**14300**	
1,4	1,40	1,12	14,00	17,6	43	15	3,5	3	10 x DC	2	**14500**	
1,5	0,90	1,20	3,30	6,1	38	15	8	3	2,2 x DC	2	**151**	
1,5	1,50	1,20	3,30	6,1	43	15	8	3	2,2 x DC	2		**152**
1,5	1,50	1,20	7,50	11,8	43	14	4	3	5 x DC	2	**153**	
1,5	1,50	1,20	15,00	18,1	43	14,6	3	3	10 x DC	2	**155**	
1,5	1,50	1,20	7,50	11,8	50	14	4	3	5 x DC	2		**154**
1,5	1,50	1,20	15,00	22,0	50	6,2	2	3	10 x DC	2		**156**
1,6	0,96	1,28	3,52	6,2	38	16,5	7	3	2,2 x DC	2	**16100**	
1,6	1,60	1,28	8,00	12,0	43	12	4	3	5 x DC	2	**16300**	
1,6	1,60	1,28	16,00	18,7	43	17	3	3	10 x DC	2	**16500**	
1,7	1,02	1,36	3,74	6,2	38	17	6,5	3	2,2 x DC	2	**17100**	
1,7	1,70	1,36	8,50	12,5	43	11	3,5	3	5 x DC	2	**17300**	
1,7	1,70	1,36	17,00	19,3	43	18,5	2,5	3	10 x DC	2	**17500**	
1,8	1,08	1,44	3,96	6,2	38	15	6	3	2,2 x DC	2	**181**	
1,8	1,80	1,44	3,96	6,2	43	15	6	3	2,2 x DC	2		**182**
1,8	1,80	1,44	9,00	12,9	43	12	3	3	5 x DC	2	**183**	
1,8	1,80	1,44	18,00	20,0	43	19,8	2	3	10 x DC	2	**185**	
1,8	1,80	1,44	9,00	12,9	50	12	3	3	5 x DC	2		**184**
1,8	1,80	1,44	18,00	22,0	50	5,3	2	3	10 x DC	2		**186**
1,9	1,14	1,52	4,18	6,2	38	17,5	5,5	3	2,2 x DC	2	**19100**	
1,9	1,90	1,52	9,50	13,2	43	10	3	3	5 x DC	2	**19300**	
1,9	1,90	1,52	19,00	20,5	43	23,5	2,5	3	10 x DC	2	**19500**	
2,0	1,20	1,60	4,40	11,9	50	15	10	6	2,2 x DC	2	**201**	
2,0	2,00	1,60	10,00	19,7	50	15	6	6	5 x DC	2	**203**	
2,0	2,00	1,60	20,00	25,0	50	22,1	5	6	10 x DC	2	**205**	
2,0	2,00	1,60	4,40	11,9	57	15	10	6	2,2 x DC	2		**202**
2,0	2,00	1,60	10,00	19,7	57	15	6	6	5 x DC	2		**204**
2,0	2,00	1,60	20,00	29,0	57	7,8	4	6	10 x DC	2		**206**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	○	○

→ v_c/f_z Page 432–439

14

Micro-ball nosed cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s= 6° | ≤ 62 HRC

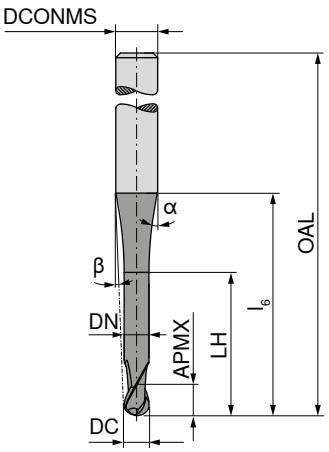

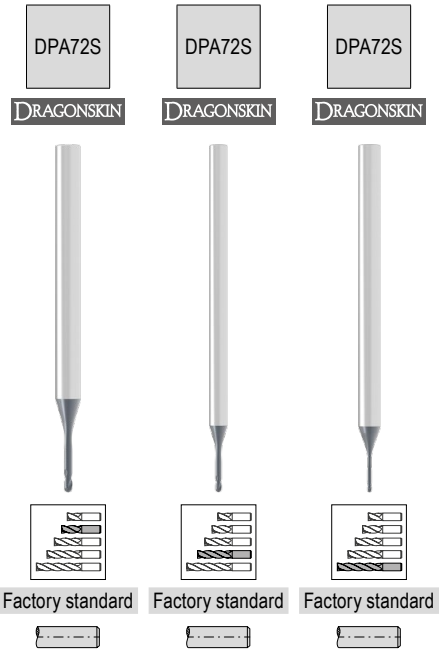

Factory standard | Factory standard | Factory standard

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 804 ...	52 804 ...	52 804 ...
0,2	0,12	0,16	0,44	5,7	38	15	14	3	2,2 x DC	2	**021**		
0,2	0,20	0,16	1,00	6,4	38	15	13	3	5 x DC	2	**024**		
0,2	0,20	0,16	2,00	9,2	38	15	9	3	10 x DC	2	**027**		
0,2	0,12	0,16	0,44	5,7	50	15	14	3	2,2 x DC	2		**022**	
0,2	0,20	0,16	1,00	6,4	50	15	13	3	5 x DC	2		**025**	
0,2	0,20	0,16	2,00	9,2	50	15	9	3	10 x DC	2		**028**	
0,2	0,12	0,16	0,44	11,3	80	15	15	6	2,2 x DC	2			**023**
0,2	0,20	0,16	1,00	12,0	80	15	14	6	5 x DC	2			**026**
0,2	0,20	0,16	2,00	14,8	80	15	12	6	10 x DC	2			**029**
0,3	0,18	0,24	0,66	5,8	38	16,5	14	3	2,2 x DC	2	**03100**		
0,3	0,30	0,24	1,50	6,9	38	16	11,5	3	5 x DC	2	**03400**		
0,3	0,30	0,24	3,00	9,7	38	13,5	8,5	3	10 x DC	2	**03700**		
0,4	0,24	0,32	0,88	5,8	38	16,5	13	3	2,2 x DC	2	**04100**		
0,4	0,40	0,32	2,00	7,4	38	15,5	10,5	3	5 x DC	2	**04400**		
0,4	0,40	0,32	4,00	10,2	38	14	8	3	10 x DC	2	**04700**		
0,5	0,30	0,40	1,10	5,8	38	15	13	3	2,2 x DC	2	**051**		
0,5	0,50	0,40	2,50	7,8	38	15	10	3	5 x DC	2	**054**		
0,5	0,50	0,40	5,00	10,7	38	13	7	3	10 x DC	2	**057**		
0,5	0,30	0,40	1,10	5,8	50	15	13	3	2,2 x DC	2		**052**	
0,5	0,50	0,40	2,50	7,8	50	15	10	3	5 x DC	2		**055**	
0,5	0,50	0,40	5,00	14,5	50	13	5	3	10 x DC	2		**058**	
0,5	0,30	0,40	1,10	11,4	80	15	14	6	2,2 x DC	2			**053**
0,5	0,50	0,40	2,50	13,4	80	15	12	6	5 x DC	2			**056**
0,5	0,50	0,40	5,00	20,2	80	15	8	6	10 x DC	2			**059**
0,6	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	**06100**		
0,6	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	**06400**		
0,6	0,60	0,48	6,00	10,6	38	17	7	3	10 x DC	2	**06700**		
0,7	0,42	0,56	1,54	5,9	38	16,5	11,5	3	2,2 x DC	2	**07100**		
0,7	0,70	0,56	3,50	8,8	38	14	8	3	5 x DC	2	**07400**		
0,7	0,70	0,56	7,00	10,6	38	20,5	7	3	10 x DC	2	**07700**		
0,8	0,48	0,64	1,76	5,9	38	15	11	3	2,2 x DC	2	**081**		
0,8	0,80	0,64	4,00	9,0	38	15	7	3	5 x DC	2	**084**		
0,8	0,80	0,64	8,00	10,5	38	8,2	6	3	10 x DC	2	**087**		
0,8	0,48	0,64	1,76	5,9	50	15	11	3	2,2 x DC	2		**082**	
0,8	0,80	0,64	4,00	9,0	50	15	7	3	5 x DC	2		**085**	
0,8	0,80	0,64	8,00	18,7	50	9,8	4	3	10 x DC	2		**088**	
0,8	0,48	0,64	1,76	11,5	80	15	13	6	2,2 x DC	2			**083**
P											●	●	●
M											●	●	●
K											●	●	●
N											●	●	●
S											●	●	●
H											○	○	○
O											○	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-ball nosed cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s= 6° | ≤ 62 HRC

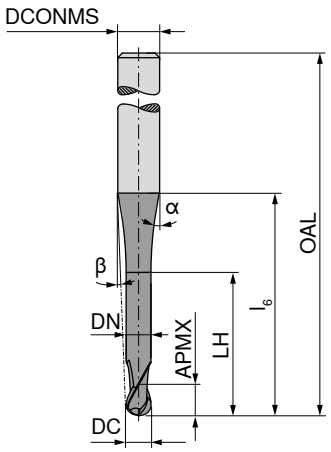

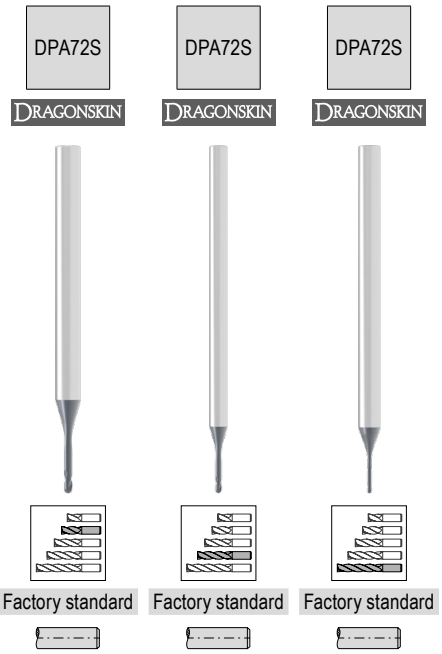

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 804 ...	52 804 ...	52 804 ...
0,8	0,80	0,64	4,00	14,6	80	15	11	6	5 x DC	2			**086**
0,8	0,80	0,64	8,00	25,9	80	14,8	6	6	10 x DC	2			**089**
0,9	0,54	0,72	1,98	5,9	38	17	10,5	3	2,2 x DC	2	**09100**		
0,9	0,90	0,72	4,50	9,5	38	14	7	3	5 x DC	2	**09400**		
0,9	0,90	0,72	9,00	10,5	38	39,5	6,5	3	10 x DC	2	**09700**		
1,0	0,60	0,80	2,20	7,8	43	15	11	4	2,2 x DC	2	**101**		
1,0	1,00	0,80	5,00	11,6	43	15	8	4	5 x DC	2	**104**		
1,0	1,00	0,80	10,00	18,3	43	8	5	4	10 x DC	2	**107**		
1,0	0,60	0,80	2,20	7,8	60	15	11	4	2,2 x DC	2		**102**	
1,0	1,00	0,80	5,00	11,6	60	15	8	4	5 x DC	2		**105**	
1,0	1,00	0,80	10,00	23,7	60	10,2	4	4	10 x DC	2		**108**	
1,0	0,60	0,80	2,20	11,5	80	15	13	6	2,2 x DC	2			**103**
1,0	1,00	0,80	5,00	15,3	80	15	10	6	5 x DC	2			**106**
1,0	1,00	0,80	10,00	28,7	80	13	5	6	10 x DC	2			**109**
1,1	0,66	0,88	2,42	7,9	43	16,5	11	4	2,2 x DC	2	**11100**		
1,1	1,10	0,88	5,50	12,0	43	14,5	7,5	4	5 x DC	2	**11400**		
1,1	1,10	0,88	11,00	18,3	43	13,5	5,5	4	10 x DC	2	**11700**		
1,2	0,72	0,96	2,64	7,9	43	15	11	4	2,2 x DC	2	**121**		
1,2	1,20	0,96	6,00	12,4	43	15	7	4	5 x DC	2	**124**		
1,2	1,20	0,96	12,00	18,2	43	9,3	5	4	10 x DC	2	**127**		
1,2	0,72	0,96	2,64	7,9	60	15	11	4	2,2 x DC	2		**122**	
1,2	1,20	0,96	6,00	12,4	60	15	7	4	5 x DC	2		**125**	
1,2	1,20	0,96	12,00	26,1	60	9,1	4	4	10 x DC	2		**128**	
1,2	0,72	0,96	2,64	11,6	80	15	12	6	2,2 x DC	2			**123**
1,2	1,20	0,96	6,00	16,2	80	15	9	6	5 x DC	2			**126**
1,2	1,20	0,96	12,00	31,8	80	11,7	5	6	10 x DC	2			**129**
1,3	0,78	1,04	2,86	8,0	43	16,5	10,5	4	2,2 x DC	2	**13100**		
1,3	1,30	1,04	6,50	12,8	43	14	6,5	4	5 x DC	2	**13400**		
1,3	1,30	1,04	13,00	18,2	43	17	5	4	10 x DC	2	**13700**		
1,4	0,84	1,12	3,08	8,0	43	16,5	10	4	2,2 x DC	2	**14100**		
1,4	1,40	1,12	7,00	13,2	43	14	6,5	4	5 x DC	2	**14400**		
1,4	1,40	1,12	14,00	18,1	43	20,5	5	4	10 x DC	2	**14700**		
1,5	0,90	1,20	3,30	8,0	43	15	9	4	2,2 x DC	2	**151**		
1,5	1,50	1,20	7,50	13,7	43	15	6	4	5 x DC	2	**154**		
1,5	1,50	1,20	15,00	18,1	43	13,5	4	4	10 x DC	2	**157**		
1,5	0,90	1,20	3,30	8,0	60	15	9	4	2,2 x DC	2		**152**	
1,5	1,50	1,20	7,50	13,7	60	15	6	4	5 x DC	2		**155**	

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-ball nosed cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s= 6° | ≤ 62 HRC

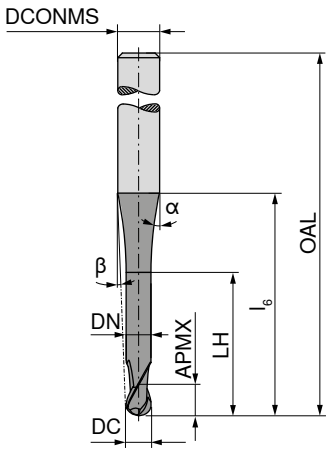

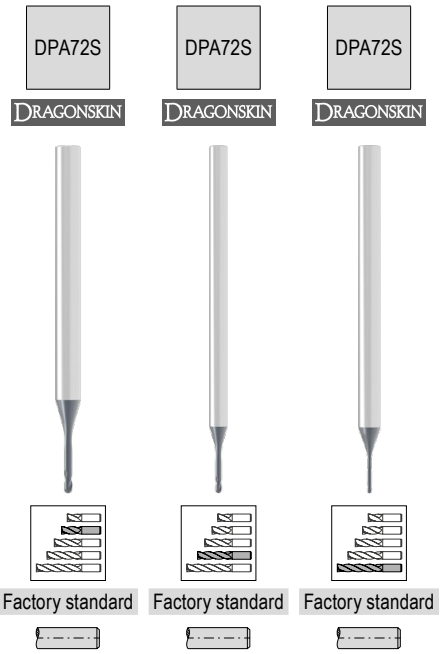

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 804 ...	52 804 ...	52 804 ...
1,5	1,50	1,20	15,00	28,0	60	7,8	3	4	10 x DC	2		**158**	
1,5	0,90	1,20	3,30	11,7	80	15	11	6	2,2 x DC	2			**153**
1,5	1,50	1,20	7,50	17,4	80	15	8	6	5 x DC	2			**156**
1,5	1,50	1,20	15,00	35,8	80	10,2	4	6	10 x DC	2			**159**
1,6	0,96	1,28	3,52	8,1	43	16,5	9	4	2,2 x DC	2	**16100**		
1,6	1,60	1,28	8,00	14,1	43	13	5,5	4	5 x DC	2	**16400**		
1,6	1,60	1,28	16,00	18,5	43	29,5	4,5	4	10 x DC	2	**16700**		
1,7	1,02	1,36	3,74	8,1	43	16,5	9	4	2,2 x DC	2	**17100**		
1,7	1,70	1,36	8,50	14,5	43	12,5	5	4	5 x DC	2	**17400**		
1,7	1,70	1,36	17,00	18,9	43	35,5	4	4	10 x DC	2	**17700**		
1,8	1,08	1,44	3,96	8,1	43	15	8	4	2,2 x DC	2	**181**		
1,8	1,80	1,44	9,00	15,0	43	15	5	4	5 x DC	2	**184**		
1,8	1,80	1,44	18,00	19,5	43	31,1	4	4	10 x DC	2	**187**		
1,8	1,08	1,44	3,96	8,1	60	15	8	4	2,2 x DC	2		**182**	
1,8	1,80	1,44	9,00	15,0	60	15	5	4	5 x DC	2		**185**	
1,8	1,80	1,44	18,00	31,9	60	6,8	2	4	10 x DC	2		**188**	
1,8	1,08	1,44	3,96	11,8	80	15	11	6	2,2 x DC	2			**183**
1,8	1,80	1,44	9,00	18,7	80	15	7	6	5 x DC	2			**186**
1,8	1,80	1,44	18,00	39,3	80	9,1	4	6	10 x DC	2			**189**
1,9	1,14	1,52	4,18	8,2	43	16,5	8	4	2,2 x DC	2	**19100**		
1,9	1,90	1,52	9,50	15,5	43	11,5	4,5	4	5 x DC	2	**19400**		
1,9	1,90	1,52	19,00	19,9	43	54,5	3,5	4	10 x DC	2	**19700**		
2,0	1,20	1,60	4,40	11,9	57	15	10	6	2,2 x DC	2	**201**		
2,0	2,00	1,60	10,00	19,7	57	15	6	6	5 x DC	2	**204**		
2,0	2,00	1,60	20,00	32,0	57	9,5	4	6	10 x DC	2	**207**		
2,0	1,20	1,60	4,40	11,9	70	15	10	6	2,2 x DC	2		**202**	
2,0	2,00	1,60	10,00	19,7	70	15	6	6	5 x DC	2		**205**	
2,0	2,00	1,60	20,00	41,4	70	8,5	3	6	10 x DC	2		**208**	
2,0	1,20	1,60	4,40	11,9	80	15	10	6	2,2 x DC	2			**203**
2,0	2,00	1,60	10,00	19,7	80	15	6	6	5 x DC	2			**206**
2,0	2,00	1,60	20,00	41,4	80	8,5	3	6	10 x DC	2			**209**
P											●	●	●
M											●	●	●
K											●	●	●
N											●	●	●
S											●	●	●
H											○	○	○
O											○	○	○

→ v_c/f_z Page 432–439

Micro-torus cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s=12° | ≤ 62 HRC

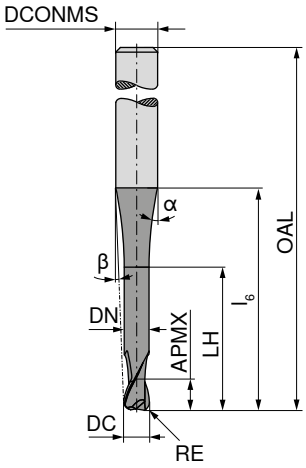

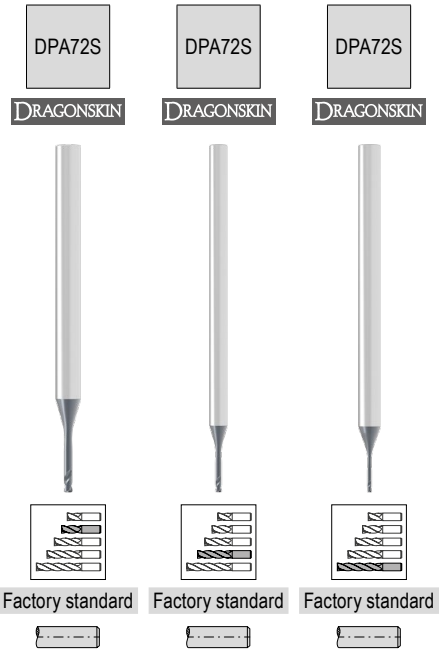

Factory standard | Factory standard | Factory standard

	52 806 ...	52 806 ...	52 806 ...

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP			
0,5	0,1	0,30	0,40	1,10	5,8	38	15	13	3	2,2 x DC	2	**051**		
0,5	0,1	0,50	0,40	2,50	7,8	38	15	10	3	5 x DC	2	**054**		
0,5	0,1	0,50	0,40	5,00	10,7	38	13	7	3	10 x DC	2	**057**		
0,5	0,1	0,30	0,40	1,10	5,8	50	15	13	3	2,2 x DC	2		**052**	
0,5	0,1	0,50	0,40	2,50	7,8	50	15	10	3	5 x DC	2		**055**	
0,5	0,1	0,50	0,40	5,00	14,5	50	13	5	3	10 x DC	2		**058**	
0,5	0,1	0,30	0,40	1,10	11,4	80	15	14	6	2,2 x DC	2			**053**
0,5	0,1	0,50	0,40	2,50	13,4	80	15	12	6	5 x DC	2			**056**
0,5	0,1	0,50	0,40	5,00	20,2	80	15	8	6	10 x DC	2			**059**
0,6	0,1	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	**06101**		
0,6	0,1	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	**06401**		
0,6	0,1	0,60	0,48	6,00	10,6	38	17	7	3	10 x DC	2	**06701**		
0,8	0,2	0,48	0,64	1,76	5,9	38	16,5	11	3	2,2 x DC	2	**08102**		
0,8	0,2	0,80	0,64	4,00	9,0	38	14,5	7,5	3	5 x DC	2	**08402**		
0,8	0,2	0,80	0,64	8,00	10,5	38	27	6,5	3	10 x DC	2	**08702**		
1,0	0,2	0,60	0,80	2,20	7,8	43	15	11	4	2,2 x DC	2	**101**		
1,0	0,2	1,00	0,80	5,00	11,6	43	15	8	4	5 x DC	2	**104**		
1,0	0,2	1,00	0,80	10,00	18,3	43	8	5	4	10 x DC	2	**107**		
1,0	0,2	0,60	0,80	2,20	7,8	60	15	11	4	2,2 x DC	2		**102**	
1,0	0,2	1,00	0,80	5,00	11,6	60	15	8	4	5 x DC	2		**105**	
1,0	0,2	1,00	0,80	10,00	23,7	60	10,2	4	4	10 x DC	2		**108**	
1,0	0,2	0,60	0,80	2,20	11,5	80	15	13	6	2,2 x DC	2			**103**
1,0	0,2	1,00	0,80	5,00	15,3	80	15	10	6	5 x DC	2			**106**
1,0	0,2	1,00	0,80	10,00	28,7	80	13	5	6	10 x DC	2			**109**
1,2	0,2	0,72	0,96	2,64	7,9	43	16,5	10,5	4	2,2 x DC	2	**12102**		
1,2	0,2	1,20	0,96	6,00	12,4	43	14,5	7	4	5 x DC	2	**12402**		
1,2	0,2	1,20	0,96	12,00	18,2	43	15	5	4	10 x DC	2	**12702**		
1,5	0,3	0,90	1,20	3,30	8,0	43	15	9	4	2,2 x DC	2	**151**		
1,5	0,3	1,50	1,20	7,50	13,7	43	15	6	4	5 x DC	2	**154**		
1,5	0,3	1,50	1,20	15,00	18,1	43	24	4	4	10 x DC	2	**157**		
1,5	0,3	0,90	1,20	3,30	8,0	60	15	9	4	2,2 x DC	2		**152**	
1,5	0,3	1,50	1,20	7,50	13,7	60	15	6	4	5 x DC	2		**155**	
1,5	0,3	1,50	1,20	15,00	29,2	60	7,8	3	4	10 x DC	2		**158**	
1,5	0,3	0,90	1,20	3,30	11,7	80	15	11	6	2,2 x DC	2			**153**
1,5	0,3	1,50	1,20	7,50	17,4	80	15	8	6	5 x DC	2			**156**
1,5	0,3	1,50	1,20	15,00	35,8	80	10,2	4	6	10 x DC	2			**159**
1,6	0,3	0,96	1,28	3,52	8,1	43	16,5	9	4	2,2 x DC	2	**16103**		

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-torus cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth



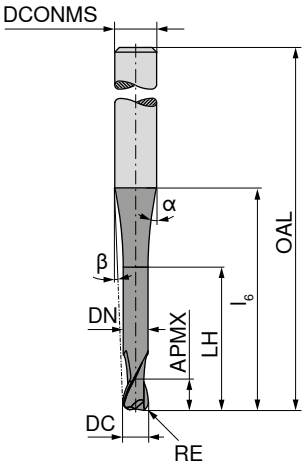

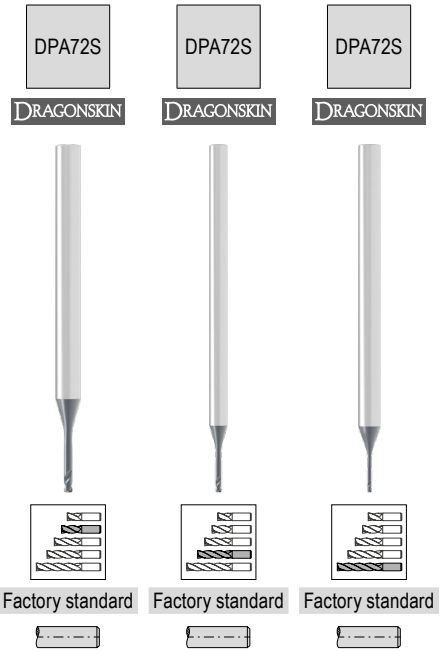

Factory standard | Factory standard | Factory standard

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_X	ZEFP	52 806 ...	52 806 ...	52 806 ...
1,6	0,3	1,60	1,28	8,00	14,1	43	13	5,5	4	5 x DC	2	**16403**		
1,6	0,3	1,60	1,28	16,00	18,5	43	29,5	4,5	4	10 x DC	2	**16703**		
1,8	0,4	1,08	1,44	3,96	8,1	43	16,5	8,5	4	2,2 x DC	2	**18104**		
1,8	0,4	1,80	1,44	9,00	15,0	43	12	5	4	5 x DC	2	**18404**		
1,8	0,4	1,80	1,44	18,00	19,5	43	41	4	4	10 x DC	2	**18704**		
2,0	0,5	1,20	1,60	4,40	11,9	57	15	10	6	2,2 x DC	2	**201**		
2,0	0,5	2,00	1,60	10,00	19,7	57	15	6	6	5 x DC	2	**204**		
2,0	0,5	2,00	1,60	20,00	32,0	57	9,5	4	6	10 x DC	2	**207**		
2,0	0,5	1,20	1,60	4,40	11,9	70	15	10	6	2,2 x DC	2		**202**	
2,0	0,5	2,00	1,60	10,00	19,7	70	15	6	6	5 x DC	2		**205**	
2,0	0,5	2,00	1,60	20,00	41,4	70	8,5	3	6	10 x DC	2		**208**	
2,0	0,5	1,20	1,60	4,40	11,9	80	15	10	6	2,2 x DC	2			**203**
2,0	0,5	2,00	1,60	10,00	19,7	80	15	6	6	5 x DC	2			**206**
2,0	0,5	2,00	1,60	20,00	41,4	80	8,5	3	6	10 x DC	2			**209**

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

MultiLock – Ball Nosed Cutter

The sustainable exchangeable head system

▲ KLG = Coupling Size





DC mm	KLG	APMX mm	LPR mm	ZEFP	Factory standard 53 803 ...	Factory standard 53 804 ...
12	EL12	7,0	9	4	**01200**	**01200**
16	EL16	9,5	12	4	**01600**	**01600**
20	EL20	12,0	15	4	**02000**	**02000**
25	EL25	16,0	19	4	**02500**	**02500**

P		●
M		○
K		●
N		○
S	●	
H		
O		

→ v_c/f_z Page 440

MultiLock – Torus Cutter

The sustainable exchangeable head system

▲ KLG = Coupling Size

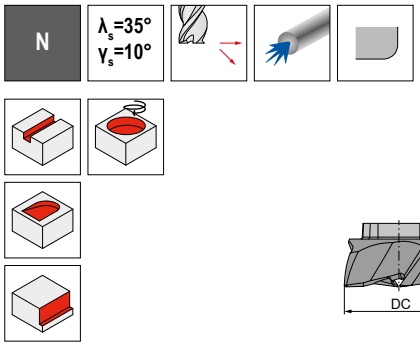





DC mm	RE mm	KLG	APMX mm	LPR mm	ZEFP	Factory standard 53 805 ...	Factory standard 53 806 ...
12	0,2	EL12	3,0	5	4	**01205**	**01205**
16	0,3	EL16	4,5	7	4	**01607**	**01607**
20	0,3	EL20	6,0	8	5	**02008**	**02008**
25	0,5	EL25	8,0	10	6	**02510**	**02510**

P		●
M		○
K		●
N		○
S	●	
H		
O		

→ v_c/f_z Page 441

MultiLock – High Feed Cutter

The sustainable exchangeable head system

▲ KLG = Coupling size
▲ r_{3d} = programmed corner radius
▲ APMX does not correspond to the maximum depth of cut







DCX mm	KLG	r_{3D} mm	APMX mm	LPR mm	ZEFP	Factory standard 53 801 ...	Factory standard 53 802 ...
12	EL12	0,7	3,18	4	5	01202	01202
16	EL16	1,2	3,73	5	6	01605	01605
20	EL20	1,2	4,31	6	6	02005	02005
25	EL25	1,2	5,32	7	6	02505	02505
P							●
M							○
K							●
N							
S						●	
H							
O							

→ v_c/f_z Page 442

MultiLock – Deburring Cutter

The sustainable exchangeable head system

▲ KLG = Coupling Size





DCX mm	KLG	APMX mm	DC mm	LPR mm	ZEFP	Factory standard 53 800 ...
12	EL12	4	4	8	4	01200
16	EL16	6	4	12	4	01600
P						●
M						○
K						●
N						○
S						
H						
O						

→ v_c/f_z Page 443

MultiLock – Holders

▲ KLG = Coupling Size

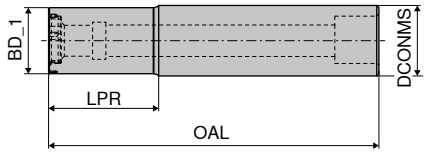

KLG	BD_1 mm	DCONMS mm	OAL mm	LPR mm	84 050 ...	84 051 ...
EL12	11	12	66	20	01200	01200
EL16	15	16	75	25	01600	01600
EL20	19	20	77	25	02000	02000
EL25	24	25	87	30	02500	02500

Spare parts for Article no.	Cylindrical screw 70 950 ...	TORX® blade 80 950 ...	Key D 80 950 ...	Molykote 70 950 ...	Clamping screw 70 950 ...	Threaded bush 70 950 ...	Torque screw-driver 80 950 ...	Bit 80 398 ...
84 051 01200 / 84 050 01200	42000	054	120	303	41900	42100	193	03500
84 051 01600 / 84 050 01600	42300	055	121	303	42200	42400	193	04500
84 051 02000 / 84 050 02000	42300	055	121	303	42200	42400	193	04500
84 051 02500 / 84 050 02500	42600	055	121	303	42500	42700	193	06000

MultiLock – Screw-in adapter, type A

▲ KLG = Coupling size

▲ For high-feed and torus cutters

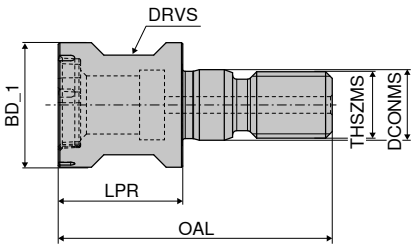

KLG	BD_1 mm	THSZMS	OAL mm	LPR mm	DCONMS mm	DRVS mm	84 052 ...
EL12	11	M6	28	13	6,5	9	01200
EL16	15	M8	33	14	8,5	12	01600
EL20	19	M10	37	18	10,5	15	02000
EL25	24	M12	42	20	12,5	17	02500

Spare parts for Article no.	TORX® blade 80 950 ...	Key D 80 950 ...	Molykote 70 950 ...	Clamping screw 70 950 ...	Threaded bush 70 950 ...	Torque screw-driver 80 950 ...	Bit 80 398 ...
84 052 01200	054	120	303	41900	42100	193	03500
84 052 01600	055	121	303	42200	42400	193	04500
84 052 02000	055	121	303	42200	42400	193	04500
84 052 02500	055	121	303	42500	42700	193	06000

MultiLock – Screw-in adapter, type B

▲ KLG = Coupling size
▲ For radius milling and deburring cutters

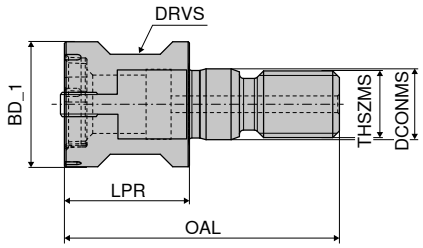

KLG	BD_1 mm	THSZMS	OAL mm	LPR mm	DCONMS mm	DRVS mm	84 053 ...
EL12	11	M6	28	13	6,5	9	**01200**
EL16	15	M8	33	14	8,5	12	**01600**
EL20	20	M10	37	18	10,5	15	**02000**
EL25	25	M12	42	20	12,5	17	**02500**

Spare parts for Article no.	TORX® blade 80 950 ...	Clamping screw 84 950 ...	Key D 80 950 ...	Molykote 70 950 ...	Torque screw-driver 80 950 ...	Mounting bush 84 950 ...
84 053 01200	**054**	**18600**	**120**	**303**	**193**	**18000**
84 053 01600	**055**	**18800**	**121**	**303**	**193**	**18100**
84 053 02000	**055**	**18700**	**121**	**303**	**193**	**18200**
84 053 02500	**055**	**18900**	**121**	**303**	**193**	**18300**

Information on how to correctly assemble the MultiLock adapters can be found on → **page PL**.

MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads

→ Chapter 2, Solid carbide drilling

Page No. 2|107

Solid Carbide NC Spot Drills

Ø 8, 10, 12, 16, 20 mm
NOF 2

SIG 90°

SIG 120°

SIG 142°

→ Chapter 4, Reaming and countersinking

Page No. 4|18 + 4|19

Replaceable reaming heads

Ø 8,00 – 30,20 mm

Through hole

Ø 12,20 – 30,20 mm

Blind hole

→ Chapter 14, Solid carbide milling cutters

Page No. 14|198 – 14|202

Solid carbide shoulder mills
Ø 8, 10, 12, 16, 20 mm /
ZEFP 3+4

Type PCR-UNI

Type PCR-ALU

Type N

Solid carbide torus bull nose milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4


Type W

Type N

Solid carbide rough and finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6

Type NF

Solid carbide finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide ball-nosed end mills
Ø 10, 12, 16, 20 mm / ZEFP 4

Type N

Solid carbide high-feed cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide quarter round cutter
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide deburring cutters
Ø 10, 12, 16, 20 mm / ZEFP 4+6

Type N

Type N

NOF / ZEFP = Number of cutting edges

Tool holder

→ Catalogue – Clamping technology, Chapter 16 Accessories

Page No. 16|259 – 16|261

extra short / OAL 60 – 90 mm

Tapered 87° / Steel

Cylindrical* / Steel

short / OAL 85 – 120 mm

Tapered 87° / Steel

Cylindrical* / Steel

Tapered 87° / Solid carbide


Cylindrical* / Solid carbide

medium / OAL 110 – 150 mm

Tapered 87° / Solid carbide

Cylindrical* / Solid carbide

long / OAL 150 – 200 mm

Tapered 87° / Solid carbide

Cylindrical* / Steel

Cylindrical* / Solid carbide

extra long / OAL 200 – 250 mm

Cylindrical* / Steel

Cylindrical* / Solid carbide

* only conditionally suitable for milling

14

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

PCR UNI | λ_s=36° γ_s=10° | HPC | APA72S





Factory standard

52 871 ...

DC mm	RE mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	
10	0,32	08	7,5	9,8	13	4	**10000**
12	0,32	10	9,0	11,8	16	4	**12000**
16	0,32	12	12,0	15,8	20	4	**16000**
20	0,50	16	15,0	19,8	25	4	**20000**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 444+445

MultiChange – Torus Cutter

The exchangeable head system for the highest demands and a wide range of applications

W | λ_s=43° γ_s=24° | DLC | DRAGONSKIN





Factory standard

52 870 ...

DC mm	RE mm	SZID	APMX mm	DN mm	LPR mm	ZEFP	
10	0,5	08	7,5	9,8	13	3	**10005**
10	1,0	08	7,5	9,8	13	3	**10010**
12	0,5	10	9,0	11,8	16	3	**12005**
12	1,0	10	9,0	11,8	16	3	**12010**
12	2,0	10	9,0	11,8	16	3	**12020**
16	2,0	12	12,0	15,8	20	3	**16020**
16	4,0	12	12,0	15,8	20	3	**16040**
20	2,0	16	15,0	19,8	25	3	**20020**
20	3,0	16	15,0	19,8	25	3	**20030**
20	4,0	16	15,0	19,8	25	3	**20040**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 452

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

PCR ALU | λ_s=41° γ_s=15° | HPC | DLC | DRAGONSKIN





Factory standard

52 872 ...

DC mm	RE mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	
10	0,32	08	7,5	9,8	13	4	**10000**
12	0,32	10	9,0	11,8	16	4	**12000**
16	0,32	12	12,0	15,8	20	4	**16000**
20	0,50	16	15,0	19,8	25	4	**20000**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 444+445

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ TQX = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

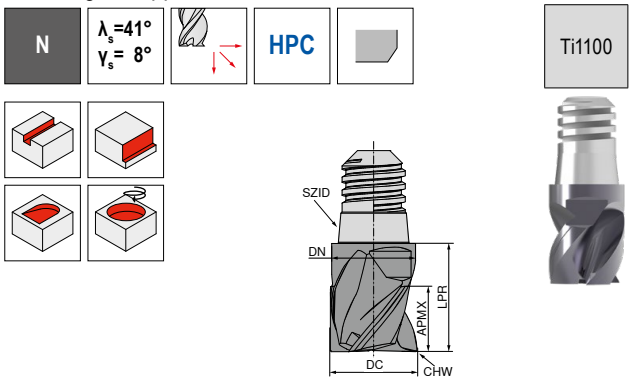

Factory standard

52 861 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	
8	06	6,0	7,8	11	0,16	3	**080**
10	08	7,5	9,8	13	0,20	3	**100**
12	10	9,0	11,8	16	0,24	3	**120**
16	12	12,0	15,8	20	0,32	3	**160**
20	16	15,0	19,8	25	0,40	3	**200**

P	●
M	
K	●
N	
S	
H	
O	

→ v_c/f_z Page 446

MultiChange – Roughing-Finishing Cutter

The exchangeable head system for the highest demands and a wide range of applications

▲ With flat cord profile

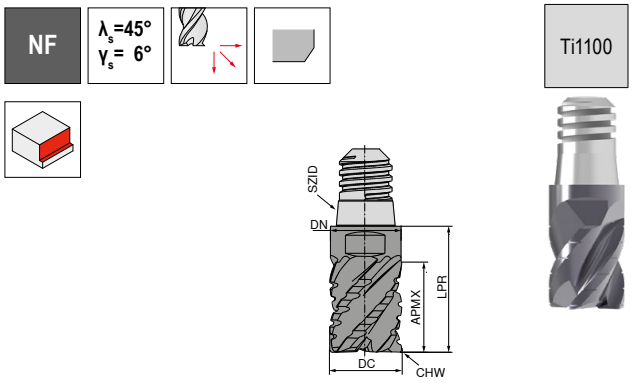

Factory standard

52 862 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	
8	06	10,0	7,8	15	0,16	4	**080**
10	08	12,5	9,8	18	0,20	4	**100**
12	10	15,0	11,8	22	0,24	4	**120**
16	12	20,0	15,8	28	0,32	5	**160**
20	16	25,0	19,8	35	0,40	6	**200**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 447

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

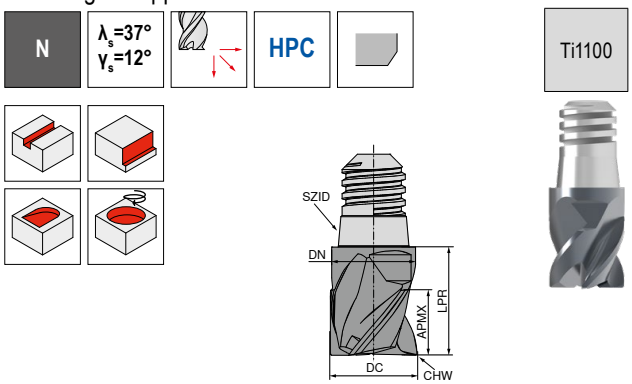

Factory standard

52 860 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	
8	06	6,0	7,8	11	0,16	4	**080**
10	08	7,5	9,8	13	0,20	4	**100**
12	10	9,0	11,8	16	0,24	4	**120**
16	12	12,0	15,8	20	0,32	4	**160**
20	16	15,0	19,8	25	0,40	4	**200**

P	●
M	
K	●
N	
S	
H	
O	

→ v_c/f_z Page 446

Assembly instructions

▲ SZID = Coupling Size
▲ SW = Across Flats Size
▲ TQX = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Finish milling cutter

The exchangeable head system for the highest demands and a wide range of applications



Ti1100

Factory standard

52 863 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	
8	06	10,0	7,8	15	6	**080**
10	08	12,5	9,8	18	6	**100**
12	10	15,0	11,8	22	6	**120**
16	12	20,0	15,8	28	6	**160**
20	16	25,0	19,8	35	6	**200**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 449

MultiChange – Ball Nosed Cutter

The exchangeable head system for the highest demands and a wide range of applications





Ti1100

Factory standard

52 866 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	
10	08	7,5	9,8	13	4	**100**
12	10	9,0	11,8	16	4	**120**
16	12	12,0	15,8	20	4	**160**
20	16	15,0	19,8	25	4	**200**

P	●
M	○
K	●
N	●
S	
H	
O	○

→ v_c/f_z Page 450+451

MultiChange – Torus Cutter

The exchangeable head system for the highest demands and a wide range of applications







Ti1100

Factory standard

52 865 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	RE mm	ZEFP	
8	06	6,0	7,8	11	1,0	4	**081**
8	06	6,0	7,8	11	2,0	4	**082**
10	08	7,5	9,8	13	1,5	4	**101**
10	08	7,5	9,8	13	3,0	4	**103**
12	10	9,0	11,8	16	1,5	4	**121**
12	10	9,0	11,8	16	4,0	4	**124**
16	12	12,0	15,8	20	2,0	4	**162**
16	12	12,0	15,8	20	5,0	4	**165**
20	16	15,0	19,8	25	2,0	4	**202**
20	16	15,0	19,8	25	6,0	4	**206**

P	●
M	○
K	●
N	●
S	
H	
O	○

→ v_c/f_z Page 450+451

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ TQX = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – High Feed Cutter

The exchangeable head system for the highest demands and a wide range of applications

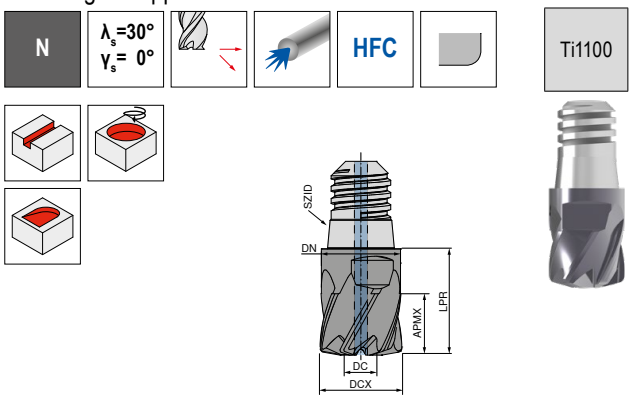

Factory standard **52 864 ...**

DCX mm	SZID	r_{3D} mm	APMX mm	LPR ±0,02 mm	ZEFP	
8	06	0,7	6,0	11	6	**080**
10	08	0,9	7,5	13	6	**100**
12	10	1,0	9,0	16	6	**120**
16	12	1,4	12,0	20	6	**160**
20	16	1,7	15,0	25	6	**200**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 448

▲ r_{3D} = corner radius to be programmed
▲ Ø DCX tapered by 0.2 mm, resulting in Ø DN
▲ Ø DCX halved, resulting in Ø DC

MultiChange – Quarter-round milling cutter

The exchangeable head system for the highest demands and a wide range of applications

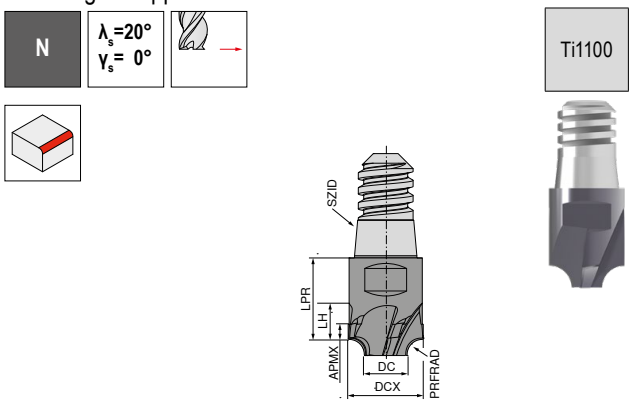

Factory standard **52 869 ...**

DCX mm	SZID	PRFRAD ±0,03 mm	APMX mm	DC mm	LPR ±0,02 mm	LH mm	ZEFP	
8	06	0,5	2,0	6,63	11	4,5	4	**080**
8	06	1,0	3,0	5,69	11	5,0	4	**081**
10	08	1,5	4,0	6,63	13	6,5	4	**100**
10	08	2,0	4,5	5,69	13	7,0	4	**101**
12	10	2,5	5,5	6,65	16	8,5	4	**120**
12	10	3,0	6,0	5,70	16	9,0	4	**121**
12	10	3,5	6,5	4,76	16	9,5	4	**122**
16	12	4,0	8,0	7,60	20	12,0	4	**160**
16	12	4,5	8,5	6,68	20	12,5	4	**161**
16	12	5,0	9,0	5,74	20	13,0	4	**162**
20	16	5,0	10,0	9,53	25	15,0	4	**200**
20	16	6,0	11,0	7,64	25	16,0	4	**201**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 453

Assembly instructions

▲ SZID = Coupling Size
▲ SW = Across Flats Size
▲ TQX = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Deburring Cutter

The exchangeable head system for the highest demands and a wide range of applications





Ti1050

Factory standard

52 867 ...

DCX mm	SZID	APMX mm	DC mm	DN mm	LPR ±0,02 mm	ZEFP	
10	08	7,5	0,02	9,8	13	4	**100**
12	10	9,0	0,02	11,8	16	4	**120**
16	12	12,0	6,40	15,8	20	6	**160**
20	16	15,0	8,00	19,8	25	6	**200**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 454

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ TQX = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Deburring Cutter

The exchangeable head system for the highest demands and a wide range of applications





Ti1100

Factory standard

52 868 ...

DCX mm	SZID	APMX mm	DC mm	DN mm	LPR ±0,02 mm	ZEFP	
10	06	4,8	7,5	8	11	6	**100**
12	08	5,5	9,0	10	13	6	**120**
16	10	8,0	12,0	12	16	6	**160**
20	12	9,5	15,0	16	20	6	**200**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 454

End milling cutter



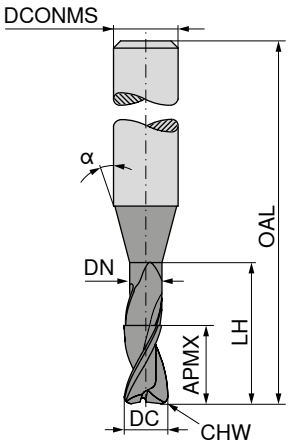

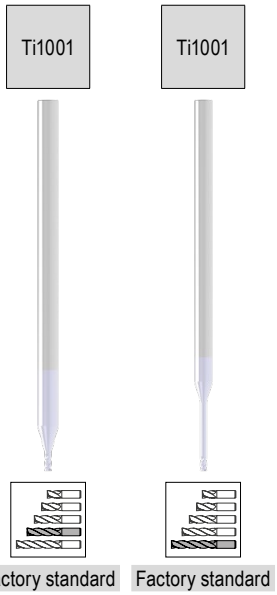

Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	CHW mm	ZEFP	50 900 ...	50 900 ...
0,2	0,2	0,18	0,6	55	15	3	0,02	2	**021**	
0,2	0,2	0,18	1,0	55	15	3	0,02	2	**022**	
0,2	0,2	0,18	1,6	55	15	3	0,02	2	**023**	
0,2	0,2	0,18	2,0	55	15	3	0,02	2	**024**	
0,3	0,3	0,28	0,9	55	15	3	0,03	2	**031**	
0,3	0,3	0,28	1,5	55	15	3	0,03	2	**032**	
0,3	0,3	0,28	2,4	55	15	3	0,03	2	**033**	
0,3	0,3	0,28	3,0	55	15	3	0,03	2	**034**	
0,4	0,4	0,37	1,2	55	15	3	0,04	2	**041**	
0,4	0,4	0,37	2,0	55	15	3	0,04	2	**042**	
0,4	0,4	0,37	3,2	55	15	3	0,04	2	**043**	
0,4	0,4	0,37	4,0	55	15	3	0,04	2	**044**	
0,5	0,5	0,45	1,5	55	15	3	0,05	2	**051**	
0,5	0,5	0,45	2,5	55	15	3	0,05	2	**052**	
0,5	0,5	0,45	4,0	55	15	3	0,05	2	**053**	
0,5	0,5	0,45	5,0	55	15	3	0,05	2	**054**	
0,6	0,6	0,58	2,0	55	15	3	0,06	2	**061**	
0,6	0,6	0,58	3,0	55	15	3	0,06	2	**062**	
0,6	0,6	0,58	5,0	65	15	3	0,06	2		**063**
0,6	0,6	0,58	6,0	65	15	3	0,06	2		**064**
0,8	0,8	0,77	2,5	55	15	3	0,08	2	**081**	
0,8	0,8	0,77	4,0	55	15	3	0,08	2	**082**	
0,8	0,8	0,77	6,5	65	15	3	0,08	2		**083**
0,8	0,8	0,77	8,0	65	15	3	0,08	2		**084**
1,0	1,0	0,95	3,0	55	15	3	0,10	2	**101**	
1,0	1,0	0,95	5,0	55	15	3	0,10	2	**102**	
1,0	1,0	0,95	8,0	65	15	3	0,10	2		**103**
1,0	1,0	0,95	10,0	65	15	3	0,10	2		**104**
1,0	1,0	0,95	12,0	65	15	3	0,10	2		**105**
1,2	1,2	1,15	3,0	55	15	3	0,12	2	**121**	
1,2	1,2	1,15	6,0	55	15	3	0,12	2	**122**	
1,2	1,2	1,15	10,0	65	15	3	0,12	2		**123**
1,2	1,2	1,15	12,0	65	15	3	0,12	2		**124**
1,3	1,3	1,25	4,0	55	15	3	0,12	2	**131**	
1,3	1,3	1,25	7,0	55	15	3	0,12	2	**132**	
1,3	1,3	1,25	11,0	65	15	3	0,12	2		**133**
1,3	1,3	1,25	13,0	65	15	3	0,12	2		**134**
1,5	1,5	1,44	5,0	55	15	3	0,12	2	**151**	
1,5	1,5	1,44	7,5	55	15	3	0,12	2	**152**	
1,5	1,5	1,44	12,0	65	15	3	0,12	2		**153**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–485

14

Continued on next page

End milling cutter

W

λ_s=45°
γ_s=18°



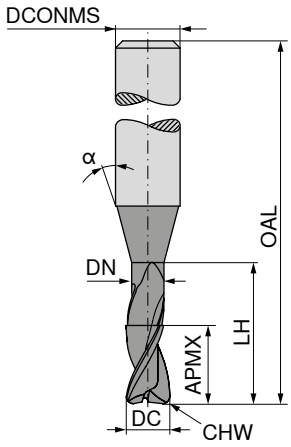

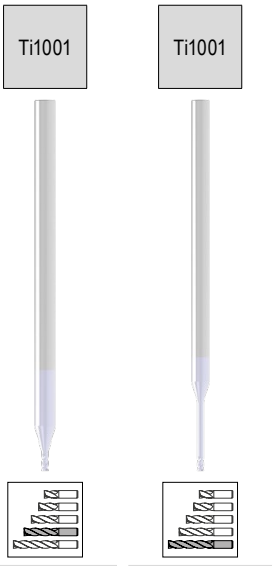

Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	CHW mm	ZEFP	50 900 ...	50 900 ...
1,5	1,5	1,44	15,0	65	15	3	0,12	2		154
1,6	1,6	1,52	5,0	55	15	3	0,12	2	161	
1,6	1,6	1,52	8,0	55	15	3	0,12	2	162	
1,6	1,6	1,52	13,0	65	15	3	0,12	2		163
1,6	1,6	1,52	16,0	65	15	3	0,12	2		164
1,8	1,8	1,72	5,5	55	15	3	0,12	2	181	
1,8	1,8	1,72	9,0	55	15	3	0,12	2	182	
1,8	1,8	1,72	14,5	65	15	3	0,12	2		183
1,8	1,8	1,72	18,0	65	15	3	0,12	2		184
2,0	2,0	1,92	6,0	55	15	3	0,13	2	201	
2,0	2,0	1,92	10,0	55	15	3	0,13	2	202	
2,0	2,0	1,92	14,0	55	15	3	0,13	2	203	
2,0	2,0	1,92	16,0	65	15	3	0,13	2		204
2,0	2,0	1,92	20,0	65	15	3	0,13	2		205
2,3	2,3	2,22	7,0	55	15	3	0,13	2	231	
2,3	2,3	2,22	11,5	55	15	3	0,13	2	232	
2,3	2,3	2,22	18,5	65	15	3	0,13	2		233
2,3	2,3	2,22	20,0	65	15	3	0,13	2		234
2,3	2,3	2,22	23,0	65	15	3	0,13	2		235
3,0	3,0	2,90	9,0	65	15	6	0,15	2	301	
3,0	3,0	2,90	15,0	65	15	6	0,15	2	302	
3,0	3,0	2,90	24,0	100	15	6	0,15	2		303
3,0	3,0	2,90	30,0	100	15	6	0,15	2		304
4,0	4,0	3,90	12,0	65	15	6	0,15	2	401	
4,0	4,0	3,90	20,0	65	15	6	0,15	2	402	
4,0	4,0	3,90	32,0	100	15	6	0,15	2		403
4,0	4,0	3,90	40,0	100	15	6	0,15	2		404
5,0	5,0	4,90	15,0	65	15	6	0,15	2	501	
5,0	5,0	4,90	25,0	65	15	6	0,15	2	502	
5,0	5,0	4,90	40,0	100	15	6	0,15	2		503
5,0	5,0	4,90	50,0	100	15	6	0,15	2		504
6,0	6,0	5,90	18,0	65	15	6	0,15	2	601	
6,0	6,0	5,90	30,0	100	15	6	0,15	2		602
6,0	6,0	5,90	48,0	100	15	6	0,15	2		603
6,0	6,0	5,90	60,0	100	15	6	0,15	2		604

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–485

End milling cutter

W | λ_s=55° γ_s= 5° | HPC



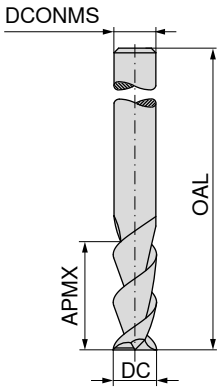

≈DIN 6527

50 960 ...

DC h6 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	
3	12	50	3	2	**030**
4	15	50	4	2	**040**
5	20	50	5	2	**050**
6	20	57	6	2	**060**
8	20	63	8	2	**080**
10	25	73	10	2	**100**
12	25	83	12	2	**120**
14	30	83	14	2	**140**
16	30	92	16	2	**160**
20	38	104	20	2	**200**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 460+461

14

End milling cutter

W | λ_s=55° γ_s= 7° | HPC



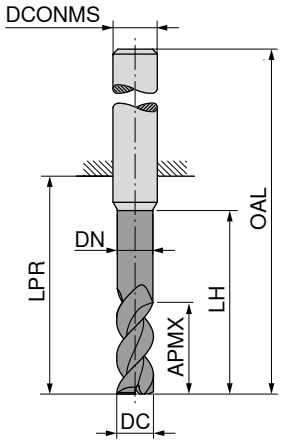

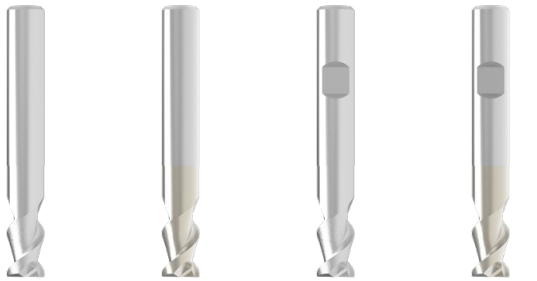

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 590 ...	54 592 ...	54 591 ...	54 593 ...
2,7	5,0	2,5	12	19	55	6	2	027	027	027	027
3,0	3,5	2,8	12	19	55	6	2	033	033		
3,0	5,0	2,8	12	19	55	6	2	031	031	031	031
3,7	6,5	3,5	12	19	55	6	2	037	037	037	037
4,0	4,5	3,8	12	19	55	6	2	043	043		
4,0	6,5	3,8	12	19	55	6	2	041	041	041	041
4,7	8,0	4,5	15	22	58	6	2	047	047	047	047
5,0	5,5	4,8	15	22	58	6	2	053	053		
5,0	8,0	4,8	15	22	58	6	2	051	051	051	051
5,7	10,0	5,5	18	22	58	6	2	057	057	057	057
6,0	7,0	5,8	18	22	58	6	2	063	063		
6,0	10,0	5,8	18	22	58	6	2	061	061	061	061
6,7	13,0	6,4	24	28	64	8	2	067	067	067	067
7,0	13,0	6,7	24	28	64	8	2	071	071	071	071
7,7	13,0	7,4	24	28	64	8	2	077	077	077	077
8,0	9,0	7,7	24	28	64	8	2	083	083		
8,0	13,0	7,7	24	28	64	8	2	081	081	081	081
8,7	16,0	8,4	30	34	74	10	2	087	087	087	087
9,0	16,0	8,7	30	34	74	10	2	091	091	091	091
9,7	16,0	9,4	30	34	74	10	2	097	097	097	097
10,0	11,0	9,7	30	34	74	10	2	103	103		
10,0	16,0	9,7	30	34	74	10	2	101	101	101	101
10,7	19,0	10,3	36	40	85	12	2	107	107	107	107
11,0	19,0	10,6	36	40	85	12	2	111	111	111	111
11,7	19,0	11,3	36	40	85	12	2	117	117	117	117
12,0	13,0	11,6	36	40	85	12	2	123	123		
12,0	19,0	11,6	36	40	85	12	2	121	121	121	121
13,0	22,0	12,6	42	46	91	14	2	131	131	131	131
13,7	22,0	13,3	42	46	91	14	2	137	137	137	137
14,0	15,0	13,6	42	46	91	14	2	143	143		
14,0	22,0	13,6	42	46	91	14	2	141	141	141	141
15,0	25,0	14,5	48	52	100	16	2	151	151	151	151
15,7	25,0	15,2	48	52	100	16	2	157	157	157	157
16,0	17,0	15,5	48	52	100	16	2	163	163		
16,0	25,0	15,5	48	52	100	16	2	161	161	161	161
18,0	20,0	17,5	54	58	106	18	2	183	183		
18,0	29,0	17,5	54	58	106	18	2	181	181	181	181
19,7	32,0	19,2	60	64	114	20	2	197	197	197	197
20,0	22,0	19,5	60	64	114	20	2	203	203		
20,0	32,0	19,5	60	64	114	20	2	201	201	201	201
24,7	40,0	24,2	75	80	136	25	2	247	247	247	247
25,0	27,0	24,5	75	80	136	25	2	253	253		
25,0	40,0	24,5	75	80	136	25	2	251	251	251	251
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=55° γ_s= 7° | HPC



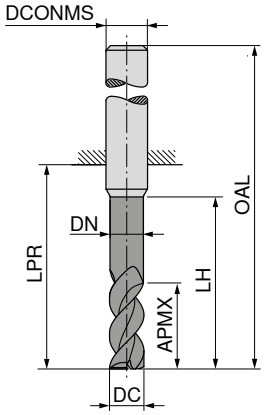

LPR with Shank DIN 6535 HB

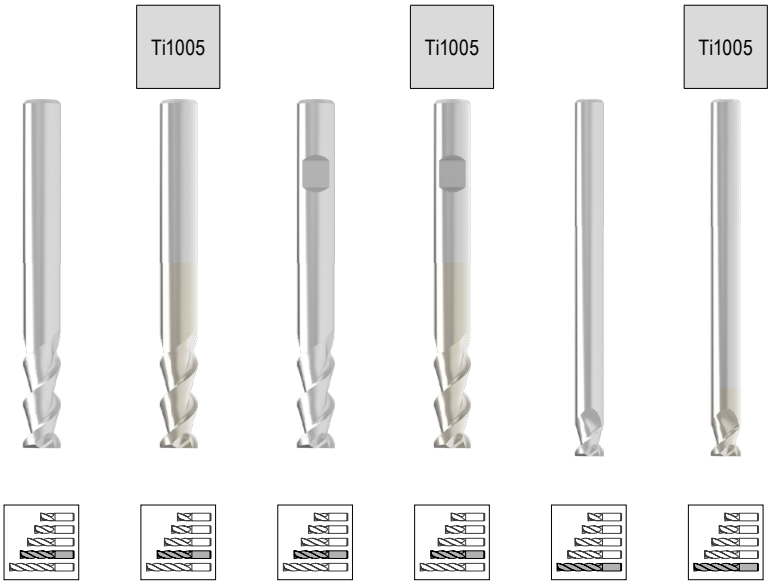

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	54 590 ...		54 592 ...		54 591 ...		54 593 ...		54 590 ...		54 592 ...	
mm	mm	mm	mm	mm	mm	mm													
2,7	8,0	2,5	15	22	58	6	2	028		028		028		028					
3,0	3,5	2,8	15	22	58	6	2	034		034									
3,0	8,0	2,8	15	22	58	6	2	032		032		032		032					
3,0	3,5	2,8	24	31	67	6	2									035		035	
3,7	10,5	3,5	20	26	62	6	2	038		038		038		038					
4,0	4,5	3,8	20	26	62	6	2	044		044									
4,0	10,5	3,8	20	26	62	6	2	042		042		042		042					
4,0	4,5	3,8	32	38	74	6	2									045		045	
4,7	13,0	4,5	25	34	70	6	2	048		048		048		048					
5,0	5,5	4,8	25	34	70	6	2	054		054									
5,0	13,0	4,8	25	34	70	6	2	052		052		052		052					
5,0	5,5	4,8	40	52	88	6	2									055		055	
5,7	16,0	5,5	30	34	70	6	2	058		058		058		058					
6,0	7,0	5,8	30	34	70	6	2	064		064									
6,0	16,0	5,8	30	34	70	6	2	062		062		062		062					
6,0	7,0	5,8	48	52	88	6	2									065		065	
6,7	21,0	6,4	40	44	80	8	2	068		068		068		068					
7,0	21,0	6,7	40	44	80	8	2	072		072		072		072					
7,7	21,0	7,4	40	44	80	8	2	078		078		078		078					
8,0	9,0	7,7	40	44	80	8	2	084		084									
8,0	21,0	7,7	40	44	80	8	2	082		082		082		082					
8,0	9,0	7,7	64	68	104	8	2									085		085	
8,7	26,0	8,4	50	54	94	10	2	088		088		088		088					
9,0	26,0	8,7	50	54	94	10	2	092		092		092		092					
9,7	26,0	9,4	50	54	94	10	2	098		098		098		098					
10,0	11,0	9,7	50	54	94	10	2	104		104									
10,0	26,0	9,7	50	54	94	10	2	102		102		102		102					
10,0	11,0	9,7	80	84	124	10	2									105		105	
10,7	31,0	10,3	60	64	109	12	2	108		108		108		108					
11,0	31,0	10,6	60	64	109	12	2	112		112		112		112					
11,7	31,0	11,3	60	64	109	12	2	118		118		118		118					
12,0	13,0	11,6	60	64	109	12	2	124		124									
12,0	31,0	11,6	60	64	109	12	2	122		122		122		122					
12,0	13,0	11,6	96	100	145	12	2									125		125	
13,0	36,0	12,6	70	74	119	14	2	132		132		132		132					
13,7	36,0	13,3	70	74	119	14	2	138		138		138		138					
14,0	15,0	13,6	70	74	119	14	2	144		144									
14,0	36,0	13,6	70	74	119	14	2	142		142		142		142					
14,0	15,0	13,6	112	116	161	14	2									145		145	
15,0	41,0	14,5	80	84	132	16	2	152		152		152		152					

P													
M													
K													
N								●		●		●	
S													
H													
O													

→ v_c/f_z Page 460+461

14

Continued on next page

End milling cutter

W | λ_s=55° γ_s= 7° | HPC



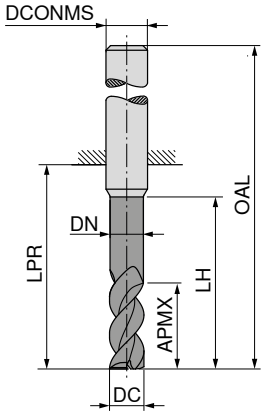

LPR with Shank DIN 6535 HB

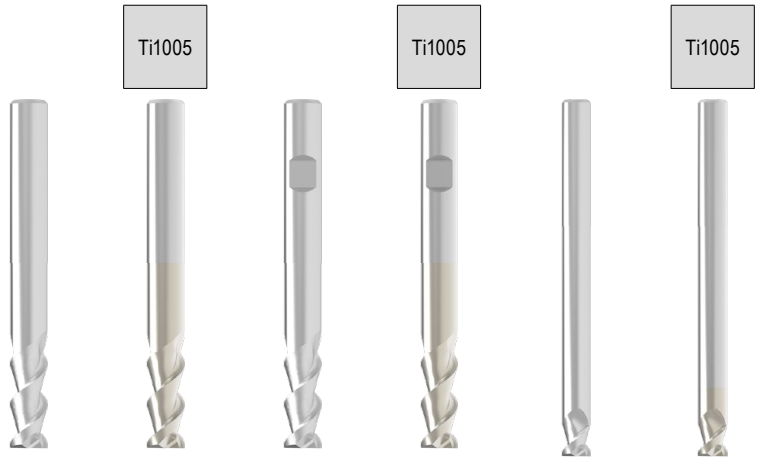

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC_{h6} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	$DCONMS_{h5}$ mm	ZEFP	54 590 ...		54 592 ...		54 591 ...		54 593 ...		54 590 ...		54 592 ...	
15,7	41,0	15,2	80	84	132	16	2		**158**		**158**		**158**		**158**				
16,0	17,0	15,5	80	84	132	16	2		**164**		**164**								
16,0	41,0	15,5	80	84	132	16	2		**162**		**162**		**162**		**162**				
16,0	17,0	15,5	128	132	180	16	2										**165**		**165**
18,0	20,0	17,5	90	94	142	18	2		**184**		**184**								
18,0	47,0	17,5	90	94	142	18	2		**182**		**182**		**182**		**182**				
18,0	20,0	17,5	144	148	196	18	2										**185**		**185**
19,7	52,0	19,2	100	104	154	20	2		**198**		**198**		**198**		**198**				
20,0	22,0	19,5	100	104	154	20	2		**204**		**204**								
20,0	52,0	19,5	100	104	154	20	2		**202**		**202**		**202**		**202**				
20,0	22,0	19,5	160	164	214	20	2										**205**		**205**
24,7	65,0	24,2	125	130	186	25	2		**248**		**248**		**248**		**248**				
25,0	27,0	24,5	125	130	186	25	2		**254**		**254**								
25,0	65,0	24,5	125	130	186	25	2		**252**		**252**		**252**		**252**				
25,0	27,0	24,5	200	204	260	25	2										**255**		**255**
P																			
M																			
K																			
N									●		●		●		●		●		●
S																			
H																			
O																			

→ v_c/f_z Page 460+461

End milling cutter with corner radius

W | λ_s=55° γ_s= 7° | HPC



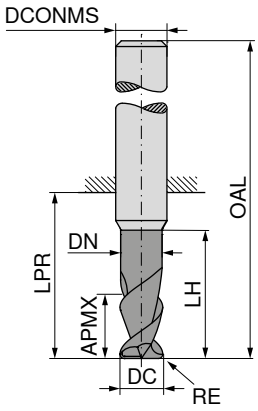

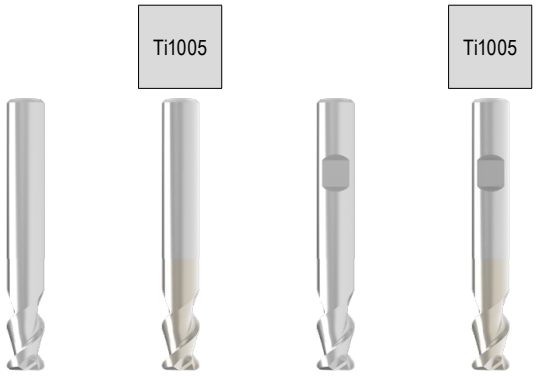

									Factory standard	Factory standard	Factory standard	Factory standard
									54 594 ...	**54 596 ...**	**54 595 ...**	**54 597 ...**
DC h6 **mm**	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP				
3	0,2	5,0	2,8	12	19	55	6	2	**031**	**031**	**031**	**031**
3	0,3	5,0	2,8	12	19	55	6	2	**033**	**033**	**033**	**033**
3	0,5	5,0	2,8	12	19	55	6	2	**035**	**035**	**035**	**035**
4	0,3	6,5	3,8	12	19	55	6	2	**041**	**041**	**041**	**041**
4	0,5	6,5	3,8	12	19	55	6	2	**043**	**043**	**043**	**043**
4	1,0	6,5	3,8	12	19	55	6	2	**045**	**045**	**045**	**045**
5	0,3	8,0	4,8	15	22	58	6	2	**051**	**051**	**051**	**051**
5	0,5	8,0	4,8	15	22	58	6	2	**053**	**053**	**053**	**053**
5	1,0	8,0	4,8	15	22	58	6	2	**055**	**055**	**055**	**055**
6	0,3	10,0	5,8	18	22	58	6	2	**061**	**061**	**061**	**061**
6	0,5	10,0	5,8	18	22	58	6	2	**063**	**063**	**063**	**063**
6	1,0	10,0	5,8	18	22	58	6	2	**065**	**065**	**065**	**065**
8	0,3	13,0	7,7	24	28	64	8	2	**081**	**081**	**081**	**081**
8	0,5	13,0	7,7	24	28	64	8	2	**083**	**083**	**083**	**083**
8	1,0	13,0	7,7	24	28	64	8	2	**085**	**085**	**085**	**085**
10	0,3	16,0	9,7	30	34	74	10	2	**101**	**101**	**101**	**101**
10	1,0	16,0	9,7	30	34	74	10	2	**103**	**103**	**103**	**103**
10	1,5	16,0	9,7	30	34	74	10	2	**105**	**105**	**105**	**105**
12	1,0	19,0	11,6	36	40	85	12	2	**121**	**121**	**121**	**121**
12	1,5	19,0	11,6	36	40	85	12	2	**123**	**123**	**123**	**123**
12	2,0	19,0	11,6	36	40	85	12	2	**125**	**125**	**125**	**125**
16	2,0	25,0	15,5	48	52	100	16	2	**161**	**161**	**161**	**161**
16	2,5	25,0	15,5	48	52	100	16	2	**163**	**163**	**163**	**163**
16	3,0	25,0	15,5	48	52	100	16	2	**165**	**165**	**165**	**165**
20	2,0	32,0	19,5	60	64	114	20	2	**201**	**201**	**201**	**201**
20	2,5	32,0	19,5	60	64	114	20	2	**203**	**203**	**203**	**203**
20	3,0	32,0	19,5	60	64	114	20	2	**205**	**205**	**205**	**205**
20	4,0	32,0	19,5	60	64	114	20	2	**206**	**206**	**206**	**206**
25	2,0	40,0	24,5	75	80	136	25	2	**251**	**251**	**251**	**251**
25	4,0	40,0	24,5	75	80	136	25	2	**253**	**253**	**253**	**253**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

14

→ v_c/f_z Page 460+461

End milling cutter with corner radius

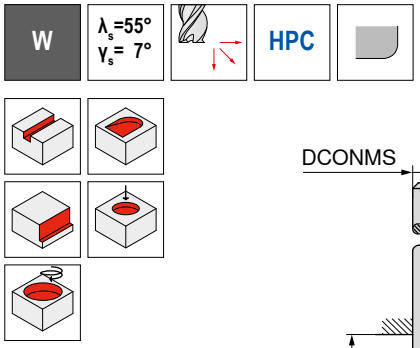

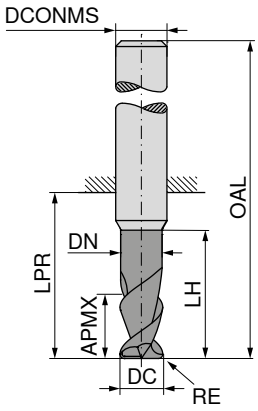

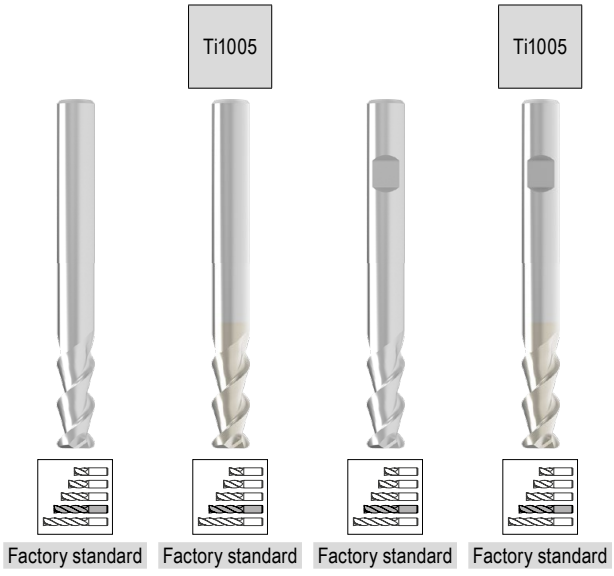

									Factory standard	Factory standard	Factory standard	Factory standard
									54 594 ...	54 596 ...	54 595 ...	54 597 ...
DC h6 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP				
3	0,2	8,0	2,8	15	22	58	6	2	032	032	032	032
3	0,3	8,0	2,8	15	22	58	6	2	034	034	034	034
3	0,5	8,0	2,8	15	22	58	6	2	036	036	036	036
4	0,3	10,5	3,8	20	26	62	6	2	042	042	042	042
4	0,5	10,5	3,8	20	26	62	6	2	044	044	044	044
4	1,0	10,5	3,8	20	26	62	6	2	046	046	046	046
5	0,3	13,0	4,8	25	34	70	6	2	052	052	052	052
5	0,5	13,0	4,8	25	34	70	6	2	054	054	054	054
5	1,0	13,0	4,8	25	34	70	6	2	056	056	056	056
6	0,3	16,0	5,8	30	34	70	6	2	062	062	062	062
6	0,5	16,0	5,8	30	34	70	6	2	064	064	064	064
6	1,0	16,0	5,8	30	34	70	6	2	066	066	066	066
8	0,3	21,0	7,7	40	44	80	8	2	082	082	082	082
8	0,5	21,0	7,7	40	44	80	8	2	084	084	084	084
8	1,0	21,0	7,7	40	44	80	8	2	086	086	086	086
10	0,5	26,0	9,7	50	54	94	10	2	102	102	102	102
10	1,0	26,0	9,7	50	54	94	10	2	104	104	104	104
10	1,5	26,0	9,7	50	54	94	10	2	106	106	106	106
12	1,0	31,0	11,6	60	64	109	12	2	122	122	122	122
12	1,5	31,0	11,6	60	64	109	12	2	124	124	124	124
12	2,0	31,0	11,6	60	64	109	12	2	126	126	126	126
16	2,0	41,0	15,5	80	84	132	16	2	162	162	162	162
16	2,5	41,0	15,5	80	84	132	16	2	164	164	164	164
16	4,0	41,0	15,5	80	84	132	16	2	166	166	166	166
20	2,0	52,0	19,5	100	104	154	20	2	202	202	202	202
20	2,5	52,0	19,5	100	104	154	20	2	204	204	204	204
20	4,0	52,0	19,5	100	104	154	20	2	207	207	207	207
25	2,0	65,0	24,5	125	130	186	25	2	252	252	252	252
25	4,0	65,0	24,5	125	130	186	25	2	254	254	254	254
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 460+461

Slot milling cutter



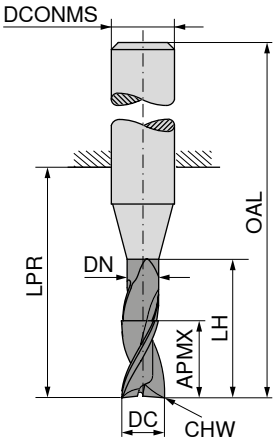

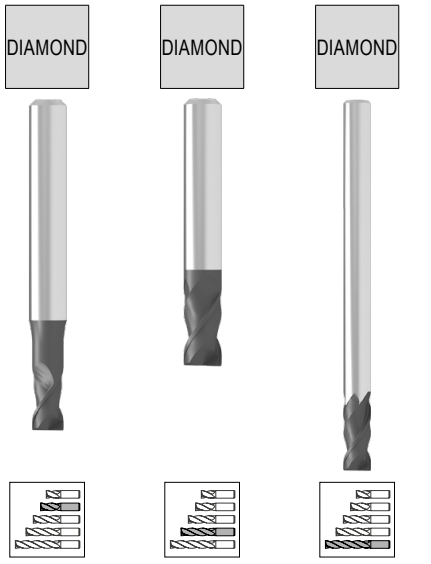

										DIN 6527	DIN 6527	Factory standard
										52 760 ...	52 761 ...	52 762 ...
DC mm	DC Tol.	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP			
2	e8	3			14	50	6	0,04	2	020		
2	h10	8	1,8	31	32	60	2	0,04	2			020
3	e8	4			14	50	6	0,07	2	030		
3	h10	12	2,8	41	42	70	3	0,07	2			030
4	e8	5			18	54	6	0,07	2	040		
4	h10	15	3,8	51	52	80	4	0,07	2			040
5	e8	6			18	54	6	0,12	2	050		
5	h10	20	4,8	71	72	100	5	0,12	2			050
6	e8	10			21	57	6	0,12	2		060	
6	h10	20	5,8	63	64	100	6	0,12	2			060
8	e8	16			27	63	8	0,12	2		080	
8	h10	20	7,8	83	84	120	8	0,12	2			080
10	e8	19			32	72	10	0,20	2		100	
10	h10	25	9,8	99	100	140	10	0,20	2			100
12	e8	22			38	83	12	0,20	2		120	
12	h10	25	11,8	104	105	150	12	0,20	2			120
P												
M												
K												
N										●	●	●
S												
H												
O										●	●	●

→ v_c/f_z Page 418

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



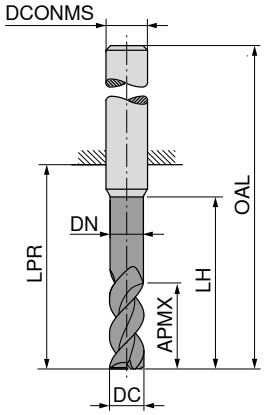

LPR with Shank DIN 6535 HB

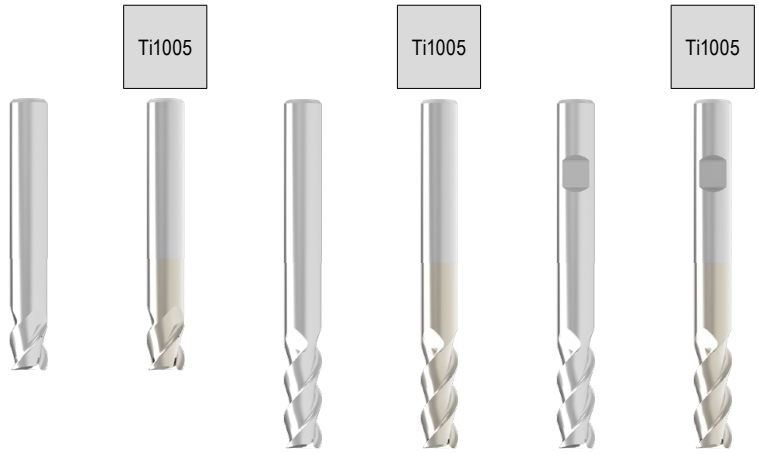

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	54 610 ...	54 612 ...	54 610 ...	54 612 ...	54 611 ...	54 613 ...
mm	mm	mm	mm	mm	mm	mm							
3	3,5	2,8	12	19	55	6	3	033	033				
3	3,5	2,8	15	22	58	6	3			034	034		
3	8,0	2,8	15	22	58	6	3			032	032	032	032
4	4,5	3,8	12	19	55	6	3	043	043				
4	4,5	3,8	20	26	62	6	3			044	044		
4	10,5	3,8	20	26	62	6	3			042	042	042	042
5	5,5	4,8	15	22	58	6	3	053	053				
5	5,5	4,8	25	34	70	6	3			054	054		
5	13,0	4,8	25	34	70	6	3			052	052	052	052
6	7,0	5,8	18	22	58	6	3	063	063				
6	7,0	5,8	30	34	70	6	3			064	064		
6	16,0	5,8	30	34	70	6	3			062	062	062	062
7	21,0	6,7	40	44	80	8	3			072	072	072	072
8	9,0	7,7	24	28	64	8	3	083	083				
8	9,0	7,7	40	44	80	8	3			084	084		
8	21,0	7,7	40	44	80	8	3			082	082	082	082
9	26,0	8,7	50	54	94	10	3			092	092	092	092
10	11,0	9,7	30	34	74	10	3	103	103				
10	11,0	9,7	50	54	94	10	3			104	104		
10	26,0	9,7	50	54	94	10	3			102	102	102	102
11	31,0	10,6	60	64	109	12	3			112	112	112	112
12	13,0	11,6	36	40	85	12	3	123	123				
12	13,0	11,6	60	64	109	12	3			124	124		
12	31,0	11,6	60	64	109	12	3			122	122	122	122
13	36,0	12,6	70	74	119	14	3			132	132	132	132
14	15,0	13,6	42	46	91	14	3	143	143				
14	15,0	13,6	70	74	119	14	3			144	144		
14	36,0	13,6	70	74	119	14	3			142	142	142	142
15	17,0	14,5	48	52	100	16	3	153	153				
15	17,0	14,5	80	84	132	16	3			154	154		
15	41,0	14,5	80	84	132	16	3			152	152	152	152
16	17,0	15,5	48	52	100	16	3	163	163				
16	17,0	15,5	80	84	132	16	3			164	164		
16	41,0	15,5	80	84	132	16	3			162	162	162	162
18	20,0	17,5	54	58	106	18	3	183	183				
18	20,0	17,5	90	94	142	18	3			184	184		
18	47,0	17,5	90	94	142	18	3			182	182	182	182
20	22,0	19,5	60	64	114	20	3	203	203				
20	22,0	19,5	100	104	154	20	3			204	204		
20	52,0	19,5	100	104	154	20	3			202	202	202	202
25	27,0	24,5	75	80	136	25	3	253	253				
25	27,0	24,5	125	130	186	25	3			254	254		
P													
M													
K													
N								●	●	●	●	●	●
S													
H													
O													

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=45° γ_s= 7° | HPC | Ti1005



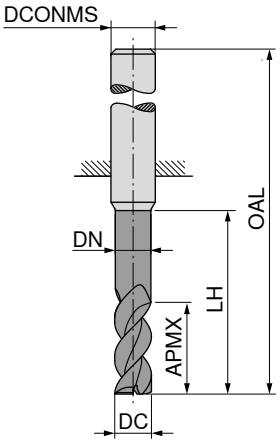

| | | |

End milling cutter with corner radius

W | λ_s=45° γ_s= 7° | HPC



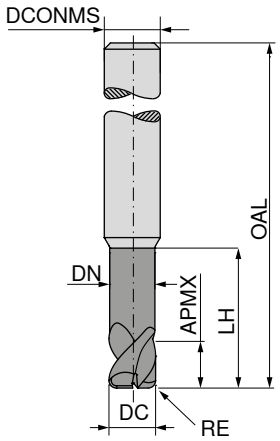

Ti1005

Factory standard

Factory standard

DC h6 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	54 620 ...		54 622 ...	
3	0,4	3,5	2,8	12	55	6	3	034		034	
3	0,6	3,5	2,8	12	55	6	3	035		035	
4	0,4	4,5	3,8	12	55	6	3	044		044	
4	0,6	4,5	3,8	12	55	6	3	046		046	
5	0,4	5,5	4,8	15	58	6	3	054		054	
5	0,6	5,5	4,8	15	58	6	3	056		056	
6	0,4	7,0	5,8	18	58	6	3	064		064	
6	0,6	7,0	5,8	18	58	6	3	066		066	
8	0,4	9,0	7,7	24	64	8	3	084		084	
8	0,6	9,0	7,7	24	64	8	3	086		086	
8	0,8	9,0	7,7	24	64	8	3	087		087	
10	1,6	11,0	9,7	30	74	10	3	103		103	
12	2,0	13,0	11,6	36	85	12	3	124		124	
14	0,6	15,0	13,6	42	91	14	3	146		146	
14	0,8	15,0	13,6	42	91	14	3	147		147	
16	1,6	17,0	15,5	48	100	16	3	163		163	
16	3,2	17,0	15,5	48	100	16	3	167		167	
18	1,6	20,0	17,5	54	106	18	3	183		183	
20	3,2	22,0	19,5	60	114	20	3	207		207	
20	5,0	22,0	19,5	60	114	20	3	209		209	

P											
M											
K											
N									●		●
S											
H											
O											

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



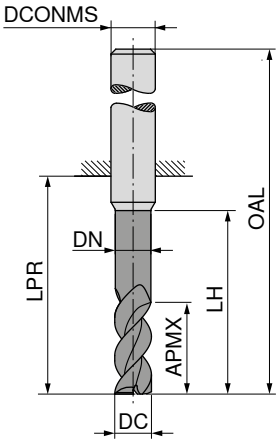

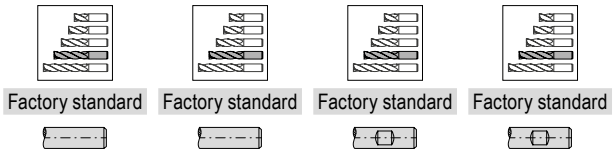

								Factory standard	Factory standard	Factory standard	Factory standard
DC $_{h6}$	APMX	DN	LH	LPR	OAL	DCONMS $_{h5}$	ZEFP				
mm	mm	mm	mm	mm	mm	mm		54 630 ...	54 632 ...	54 631 ...	54 633 ...
6	10	5,8	18	22	58	6	4	061	061	061	061
7	13	6,7	24	28	64	8	4	071	071	071	071
8	13	7,7	24	28	64	8	4	081	081	081	081
9	16	8,7	30	34	74	10	4	091	091	091	091
10	16	9,7	30	34	74	10	4	101	101	101	101
11	19	10,6	36	40	85	12	4	111	111	111	111
12	19	11,6	36	40	85	12	4	121	121	121	121
13	22	12,6	42	46	91	14	4	131	131	131	131
14	22	13,6	42	46	91	14	4	141	141	141	141
15	25	14,5	48	52	100	16	4	151	151	151	151
16	25	15,5	48	52	100	16	4	161	161	161	161
18	29	17,5	54	58	106	18	4	181	181	181	181
20	32	19,5	60	64	114	20	4	201	201	201	201
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 460+461

14

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



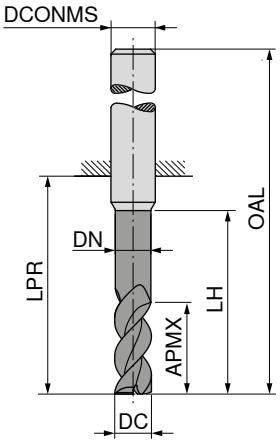

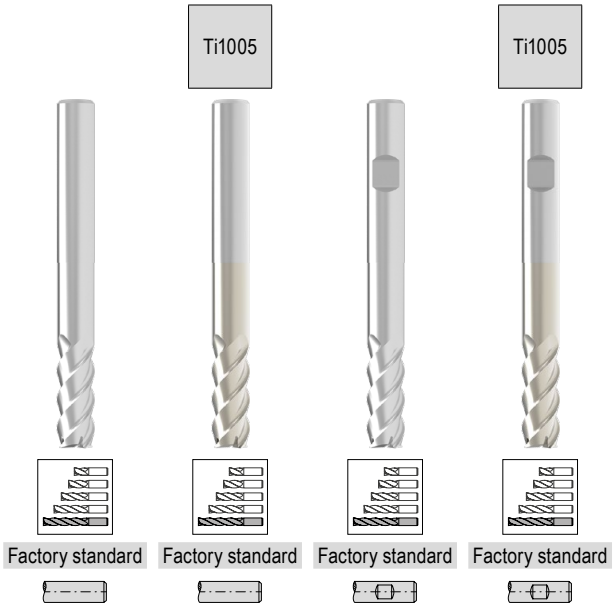

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 630 ...	54 632 ...	54 631 ...	54 633 ...
6	16	5,8	30	34	70	6	4	**062**	**062**	**062**	**062**
7	21	6,7	40	44	80	8	4	**072**	**072**	**072**	**072**
8	21	7,7	40	44	80	8	4	**082**	**082**	**082**	**082**
9	26	8,7	50	54	94	10	4	**092**	**092**	**092**	**092**
10	26	9,7	50	54	94	10	4	**102**	**102**	**102**	**102**
11	31	10,6	60	64	109	12	4	**112**	**112**	**112**	**112**
12	31	11,6	60	64	109	12	4	**122**	**122**	**122**	**122**
13	36	12,6	70	74	119	14	4	**132**	**132**	**132**	**132**
14	36	13,6	70	74	119	14	4	**142**	**142**	**142**	**142**
15	41	14,5	80	84	132	16	4	**152**	**152**	**152**	**152**
16	41	15,5	80	84	132	16	4	**162**	**162**	**162**	**162**
18	47	17,5	90	94	142	18	4	**182**	**182**	**182**	**182**
20	52	19,5	100	104	154	20	4	**202**	**202**	**202**	**202**
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=38° γ_s=17° | HPC | Ti1005

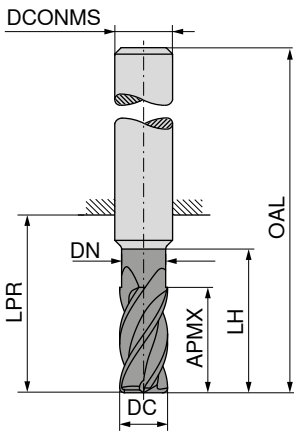

Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 650 ...		54 652 ...	
6	19	5,8	30	34	70	6	5	**062**		**062**	
8	25	7,7	40	44	80	8	5	**082**		**082**	
10	31	9,7	50	54	94	10	5	**102**		**102**	
12	37	11,6	60	64	109	12	5	**122**		**122**	
14	43	13,6	70	74	119	14	5	**142**		**142**	
16	49	15,5	80	84	132	16	7	**162**		**162**	
18	56	17,5	90	94	142	18	7	**182**		**182**	
20	62	19,5	100	104	154	20	7	**202**		**202**	

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 460+461

End milling cutter





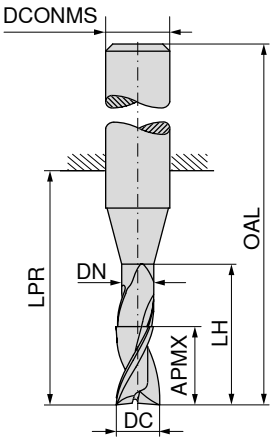

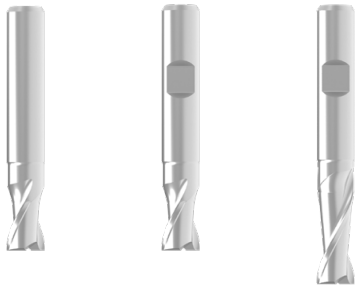

Factory standard

52 942 ...

Factory standard

52 941 ...

Factory standard

52 948 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP			
0,20	0,4			10	38	3	2	**92000**		
0,25	0,5			10	38	3	2	**92500**		
0,30	1,0			10	38	3	2	**93000**		
0,35	1,0			10	38	3	2	**93500**		
0,40	1,0			10	38	3	2	**94000**		
0,50	1,5			10	38	3	2	**95000**		
0,60	1,5			10	38	3	2	**96000**		
0,70	2,0			10	38	3	2	**97000**		
0,80	2,0			10	38	3	2	**98000**		
0,90	2,5			10	38	3	2	**99000**		
1,00	3,0			10	38	3	2	**31000**		
1,00	4,0	0,90	6	22	58	6	2			**01000**
1,10	3,0			10	38	3	2	**31100**		
1,20	4,0			10	38	3	2	**31200**		
1,30	4,0			10	38	3	2	**31300**		
1,40	4,0			10	38	3	2	**31400**		
1,50	3,0	1,40	6	18	54	6	2	**01500**	**01500**	
1,50	4,0			10	38	3	2	**31500**		
1,50	6,0	1,40	8	22	58	6	2			**01500**
1,60	4,0			10	38	3	2	**31600**		
1,80	5,0			10	38	3	2	**31800**		
2,00	4,0	1,90	8	18	54	6	2	**02000**	**02000**	
2,00	7,0	1,90	10	22	58	6	2			**02000**
2,50	4,0	2,40	8	18	54	6	2		**02500**	
2,50	6,0			10	38	3	2	**32500**		
2,80	4,0	2,70	9	18	54	6	2	**02800**	**02800**	
2,80	7,0	2,70	12	22	58	6	2			**02800**
3,00	6,0	2,90	9	18	54	6	2	**03000**	**03000**	
3,00	10,0	2,90	14	22	58	6	2			**03000**
3,50	6,0	3,30	9	18	54	6	2		**03500**	
3,80	7,0	3,60	12	18	54	6	2	**03800**	**03800**	
3,80	10,0	3,60	18	22	58	6	2			**03800**
4,00	7,0	3,80	12	18	54	6	2	**04000**	**04000**	
4,00	13,0	3,80	18	22	58	6	2			**04000**
4,50	7,0	4,30	12	18	54	6	2		**04500**	
4,80	8,0	4,60	16	18	54	6	2	**04800**	**04800**	
4,80	13,0	4,60	18	22	58	6	2			**04800**
5,00	8,0	4,80	16	18	54	6	2	**05000**	**05000**	
5,00	15,0	4,80	18	22	58	6	2			**05000**
5,50	8,0	5,30	16	18	54	6	2		**05500**	
5,75	10,0	5,55	16	18	54	6	2	**05700**	**05700**	

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter

N | λ_s=30° γ_s=14°



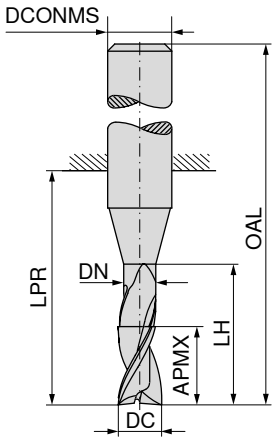

	Factory standard	Factory standard	Factory standard
	52 942 ...	52 941 ...	52 948 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP			
5,75	15,0	5,55	18	22	58	6	2			**05700**
6,00	10,0	5,80	16	18	54	6	2	**06000**	**06000**	
6,00	16,0	5,80	20	22	58	6	2			**06000**
6,75	10,0	6,45	16	23	59	8	2	**06700**	**06700**	
6,75	16,0	6,45	23	34	70	8	2			**06700**
7,00	12,0	6,70	18	23	59	8	2		**07000**	
7,00	16,0	6,70	23	34	70	8	2			**07000**
7,75	12,0	7,45	18	23	59	8	2	**07700**	**07700**	
7,75	16,0	7,45	23	34	70	8	2			**07700**
8,00	12,0	7,70	20	23	59	8	2	**08000**	**08000**	
8,00	22,0	7,70	25	34	70	8	2			**08000**
8,70	12,0	8,40	12	27	67	10	2	**08700**	**08700**	
9,70	13,0	9,40	13	27	67	10	2	**09700**	**09700**	
9,70	22,0	9,40	22	33	73	10	2			**09700**
10,00	13,0	9,70	13	27	67	10	2	**10000**	**10000**	
10,00	25,0	9,70	25	33	73	10	2			**10000**
11,00	25,0	10,60	25	39	84	12	2			**11000**
12,00	16,0	11,60	16	28	73	12	2	**12000**	**12000**	
12,00	26,0	11,60	26	39	84	12	2			**12000**
13,70	16,0	13,30	26	30	75	14	2	**13700**	**13700**	
13,70	26,0	13,30	35	39	84	14	2			**13700**
14,00	16,0	13,60	28	30	75	14	2	**14000**	**14000**	
14,00	26,0	13,60	35	39	84	14	2			**14000**
16,00	20,0	15,50	32	35	83	16	2	**16000**	**16000**	
16,00	30,0	15,50	40	45	93	16	2			**16000**
20,00	25,0	19,50	40	43	93	20	2	**20000**	**20000**	
20,00	40,0	19,50	50	54	104	20	2			**20000**

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–483

End milling cutter

N

λ_s=30°
γ_s=14°



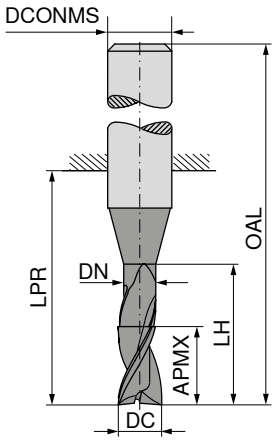

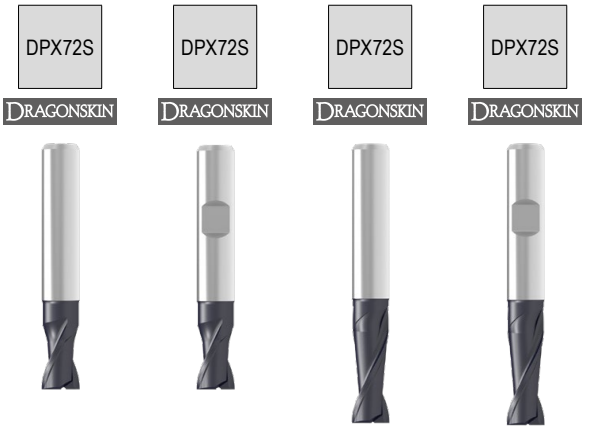

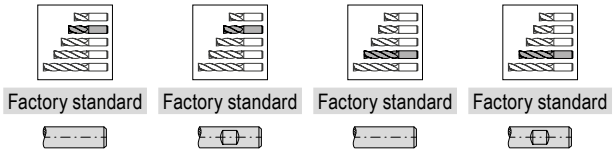

Factory standard | Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 943 ...		52 944 ...		52 947 ...		52 949 ...	
0,20	0,4			10	38	3	2	**92000**							
0,25	0,5			10	38	3	2	**92500**							
0,30	1,0			10	38	3	2	**93000**							
0,35	1,0			10	38	3	2	**93500**							
0,40	1,0			10	38	3	2	**94000**							
0,50	1,5			10	38	3	2	**95000**							
0,60	1,5			10	38	3	2	**96000**							
0,70	2,0			10	38	3	2	**97000**							
0,80	2,0			10	38	3	2	**98000**							
0,90	2,5			10	38	3	2	**99000**							
1,00	3,0			10	38	3	2	**31000**							
1,00	4,0	0,90	6	22	58	6	2					**01000**		**01000**	
1,10	3,0			10	38	3	2	**31100**							
1,20	4,0			10	38	3	2	**31200**							
1,30	4,0			10	38	3	2	**31300**							
1,40	4,0			10	38	3	2	**31400**							
1,50	4,0			10	38	3	2	**31500**							
1,50	6,0	1,40	8	22	58	6	2					**01500**		**01500**	
1,50	3,0	1,40	6	18	54	6	2	**01500**		**01500**					
1,60	4,0			10	38	3	2	**31600**							
1,80	5,0			10	38	3	2	**31800**							
2,00	4,0	1,90	8	18	54	6	2	**02000**		**02000**					
2,00	7,0	1,90	10	22	58	6	2					**02000**		**02000**	
2,00	5,0			10	38	3	2	**32000**							
2,50	4,0	2,40	8	18	54	6	2	**02500**		**02500**					
2,50	6,0			10	38	3	2	**32500**							
2,80	4,0	2,70	9	18	54	6	2	**02800**		**02800**					
2,80	7,0	2,70	12	22	58	6	2					**02800**		**02800**	
3,00	6,0	2,90	9	18	54	6	2	**03000**		**03000**					
3,00	10,0	2,90	14	22	58	6	2					**03000**		**03000**	
3,00	6,0			10	38	3	2	**33000**							
3,50	6,0	3,30	9	18	54	6	2	**03500**		**03500**					
3,80	7,0	3,60	12	18	54	6	2	**03800**		**03800**					
3,80	10,0	3,60	18	22	58	6	2					**03800**		**03800**	
4,00	7,0	3,80	12	18	54	6	2	**04000**		**04000**					
4,00	13,0	3,80	18	22	58	6	2					**04000**		**04000**	
4,50	7,0	4,30	12	18	54	6	2	**04500**		**04500**					
4,80	8,0	4,60	16	18	54	6	2	**04800**		**04800**					
4,80	13,0	4,60	18	22	58	6	2					**04800**		**04800**	
5,00	8,0	4,80	16	18	54	6	2	**05000**		**05000**					

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter



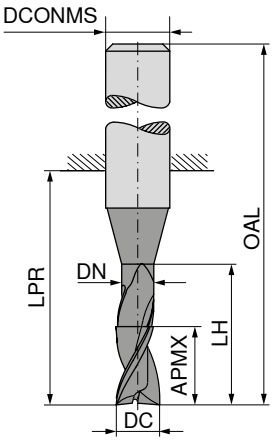

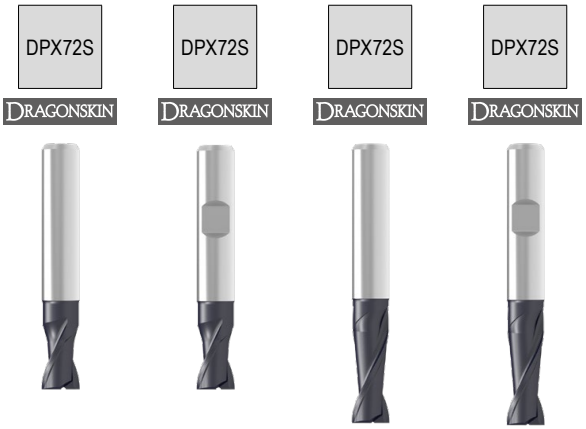

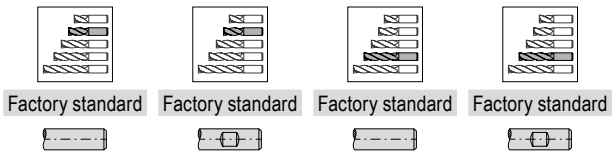

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 943 ...	52 944 ...	52 947 ...	52 949 ...
5,00	15,0	4,80	18	22	58	6	2			05000	05000
5,50	8,0	5,30	16	18	54	6	2	05500	05500		
5,75	10,0	5,55	16	18	54	6	2	05700	05700		
5,75	15,0	5,55	18	22	58	6	2			05700	05700
6,00	10,0	5,80	16	18	54	6	2	06000	06000		
6,00	16,0	5,80	20	22	58	6	2			06000	06000
6,75	10,0	6,45	16	23	59	8	2		06700		
6,75	16,0	6,45	23	34	70	8	2			06700	06700
7,00	12,0	6,70	18	23	59	8	2	07000	07000		
7,00	16,0	6,70	23	34	70	8	2			07000	07000
7,75	12,0	7,45	18	23	59	8	2	07700	07700		
7,75	16,0	7,45	23	34	70	8	2			07700	07700
8,00	12,0	7,70	20	23	59	8	2	08000	08000		
8,00	22,0	7,70	25	34	70	8	2			08000	08000
8,70	12,0	8,40	12	27	67	10	2		08700		
9,00	13,0	8,70	13	27	67	10	2	09000	09000		
9,00	22,0	8,70	22	33	73	10	2			09000	09000
9,70	13,0	9,40	13	27	67	10	2	09700	09700		
9,70	22,0	9,40	22	33	73	10	2			09700	09700
10,00	13,0	9,70	13	27	67	10	2	10000	10000		
10,00	25,0	9,70	25	33	73	10	2			10000	10000
11,00	25,0	10,60	25	39	84	12	2			11000	11000
11,70	16,0	11,30	16	28	73	12	2	11700	11700		
12,00	16,0	11,60	16	28	73	12	2	12000	12000		
12,00	26,0	11,60	26	39	84	12	2			12000	12000
13,70	16,0	13,30	26	30	75	14	2		13700		
14,00	16,0	13,60	28	30	75	14	2	14000	14000		
16,00	20,0	15,50	32	35	83	16	2	16000	16000		
16,00	30,0	15,50	40	45	93	16	2			16000	16000
18,00	20,0	17,50	34	37	85	18	2	18000	18000		
20,00	25,0	19,50	40	43	93	20	2	20000	20000		
20,00	40,0	19,50	50	54	104	20	2			20000	20000

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

14

End milling cutter



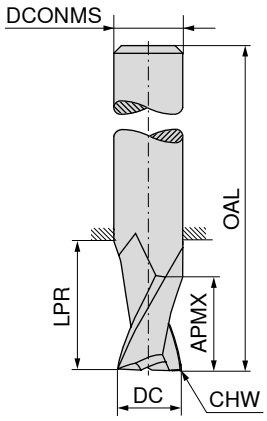

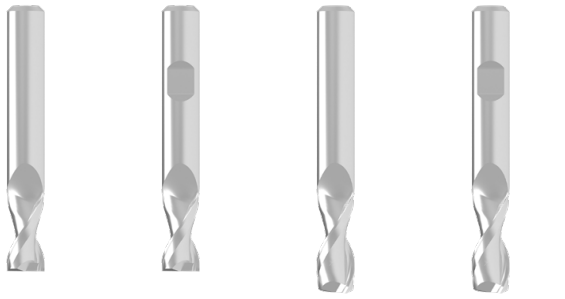

	Factory standard	Factory standard	≈DIN 6527	≈DIN 6527
	50 593 ...	50 593 ...	50 594 ...	50 594 ...

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP								
0,25	0,5	10	38	3,0		2					925			
0,30	1,0	10	38	3,0		2					930			
0,35	1,0	10	38	3,0		2					935			
0,40	1,0	10	38	3,0		2					940			
0,50	1,5	10	38	3,0		2					950			
0,60	1,5	10	38	3,0		2					960			
0,70	2,0	10	38	3,0		2					970			
0,80	2,0	10	38	3,0		2					980			
0,90	2,5	10	38	3,0		2					990			
1,00	3,0	22	50	3,0		2					010			
1,10	3,0	22	50	3,0		2					011			
1,20	4,0	22	50	3,0		2					012			
1,40	4,0	22	50	3,0		2					014			
1,50	4,0	22	50	3,0		2					015			
1,60	4,0	22	50	3,0		2					016			
1,80	5,0	22	50	3,0		2					018			
2,00	5,0	22	50	3,0	0,07	2					020			
2,00	8,0	8	32	2,0	0,07	2	020							
2,50	6,0	22	50	3,0	0,07	2					025			
2,50	8,0	8	32	2,5	0,07	2	025							
2,80	8,0	21	57	6,0	0,07	2								028
3,00	8,0	21	57	6,0	0,15	2								030
3,00	12,0	12	32	3,0	0,15	2	030							
3,50	12,0	12	32	3,5	0,15	2	035							
3,80	11,0	21	57	6,0	0,15	2								038
4,00	11,0	21	57	6,0	0,15	2								040
4,00	12,0	12	40	4,0	0,15	2	040							
4,50	14,0	22	50	4,5	0,15	2	045							
4,80	13,0	21	57	6,0	0,15	2								048
5,00	13,0	21	57	6,0	0,15	2								050
5,00	14,0	22	50	5,0	0,15	2	050							
5,50	16,0	22	50	5,5	0,15	2	055							
5,80	13,0	21	57	6,0	0,15	2								058
6,00	13,0	21	57	6,0	0,15	2								060
6,00	16,0	14	50	6,0	0,15	2		060						
6,50	16,0	16	50	6,5	0,15	2	065							
6,80	16,0	27	63	8,0	0,15	2								068
7,00	16,0	27	63	8,0	0,15	2								070
7,00	20,0	24	60	7,0	0,15	2	070							
7,50	20,0	24	60	7,5	0,15	2	075							

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter



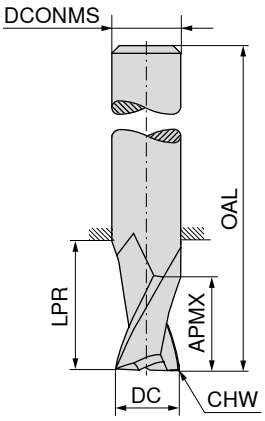

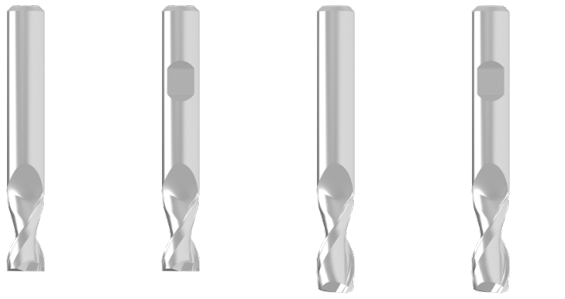

	Factory standard	Factory standard	≈DIN 6527	≈DIN 6527
	50 593 ...	50 593 ...	50 594 ...	50 594 ...

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP				
7,80	19,0	27	63	8,0	0,15	2				078
8,00	18,0	24	60	8,0	0,15	2		080		
8,00	19,0	27	63	8,0	0,15	2				080
8,50	20,0	24	60	8,5	0,15	2	085			
8,70	19,0	32	72	10,0	0,15	2				087
9,00	19,0	32	72	10,0	0,15	2				090
9,00	20,0	24	60	9,0	0,15	2	090			
9,50	22,0	34	70	9,5	0,15	2	095			
9,70	22,0	32	72	10,0	0,15	2				097
10,00	20,0	30	70	10,0	0,15	2		100		
10,00	22,0	32	72	10,0	0,15	2				100
10,70	26,0	38	83	12,0	0,15	2				107
11,00	22,0	30	70	11,0	0,15	2	110			
11,00	26,0	38	83	12,0	0,15	2				110
11,70	26,0	38	83	12,0	0,15	2				117
12,00	20,0	25	70	12,0	0,15	2		120		
12,00	26,0	38	83	12,0	0,15	2				120
13,00	25,0	30	75	13,0	0,15	2	130			
13,70	26,0	38	83	14,0	0,15	2				137
14,00	22,0	30	75	14,0	0,15	2	140			
14,00	26,0	38	83	14,0	0,15	2				140
15,00	25,0	30	75	15,0	0,15	2	150			
15,70	32,0	44	92	16,0	0,15	2				157
16,00	22,0	27	75	16,0	0,15	2		160		
16,00	32,0	44	92	16,0	0,15	2				160
17,70	32,0	44	92	18,0	0,15	2				177
18,00	30,0	52	100	18,0	0,15	2		180		
18,00	32,0	44	92	18,0	0,15	2				180
19,70	38,0	54	104	20,0	0,15	2				197
20,00	30,0	50	100	20,0	0,15	2		200		
20,00	38,0	54	104	20,0	0,15	2				200
P							●	●	●	●
M							○	○	○	○
K							●	●	●	●
N							○	○	○	○
S							○	○	○	○
H										
O							○	○	○	○

→ v_c/f_z Page 480–483

14

End milling cutter

N

λ_s=30°
γ_s=14°

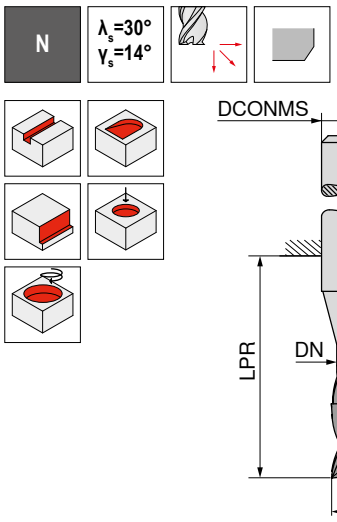



DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 939 ...	52 940 ...	52 945 ...	52 946 ...	52 950 ...	52 951 ...
2,00	4	1,90	8	18	54	6	0,04	2	02000	02000				
2,00	5			10	38	3	0,04	2	32000					
2,00	6			10	38	2	0,04	2			22000			
2,00	7	1,90	10	22	58	6	0,04	2				02000		
2,50	4	2,40	8	18	54	6	0,07	2	02500	02500				
2,50	6			10	38	3	0,07	2	32500					
2,80	4	2,70	9	18	54	6	0,07	2	02800	02800				
2,80	7			10	38	3	0,07	2			32800			
2,80	7	2,70	12	22	58	6	0,07	2				02800		
3,00	6	2,90	9	18	54	6	0,07	2	03000	03000				
3,00	6			10	38	3	0,07	2	33000					
3,00	7			10	38	3	0,07	2			33000			
3,00	10	2,90	14	22	58	6	0,07	2				03000		
3,00	20	2,90	24	32	60	3	0,07	2					33000	
3,50	6	3,30	9	18	54	6	0,07	2	03500	03500				
3,80	7	3,60	12	18	54	6	0,07	2	03800	03800				
3,80	8	3,60	20	22	50	4	0,07	2			43800			
3,80	10	3,60	18	22	58	6	0,07	2				03800		
4,00	7	3,80	12	18	54	6	0,07	2	04000	04000				
4,00	8	3,80	20	22	50	4	0,07	2			44000			
4,00	13	3,80	18	22	58	6	0,07	2				04000		
4,00	30	3,80	35	47	75	4	0,07	2					44000	
4,50	7	4,30	12	18	54	6	0,12	2	04500	04500				
4,80	8	4,60	16	18	54	6	0,12	2	04800	04800				
4,80	10	4,60	20	22	50	5	0,12	2			54800			
4,80	13	4,60	18	22	58	6	0,12	2				04800		
5,00	8	4,80	16	18	54	6	0,12	2	05000	05000				
5,00	10	4,80	20	22	50	5	0,12	2			55000			
5,00	15	4,80	18	22	58	6	0,12	2				05000		
5,00	30	4,80	35	47	75	5	0,12	2					55000	
5,50	8	5,30	16	18	54	6	0,12	2	05500	05500				
5,75	10	5,55	16	18	54	6	0,12	2	05700	05700				
5,75	15	5,55	18	22	58	6	0,12	2			05700	05700		
6,00	10	5,80	16	18	54	6	0,12	2	06000	06000				
6,00	16	5,80	20	22	58	6	0,12	2			06000	06000		
6,00	40	5,80	60	64	100	6	0,12	2					06000	06000
6,75	16	6,45	23	34	70	8	0,12	2			06700	06700		
7,00	12	6,70	18	23	59	8	0,12	2	07000	07000				

P	●	●	●	●	●	●
M	○	○	○	○	○	○
K	●	●	●	●	●	●
N	○	○	○	○	○	○
S	○	○	○	○	○	○
H	○	○	○	○	○	○
O	○	○	○	○	○	○

→ v_c/f_z Page 480–485

Continued on next page

End milling cutter

N

λ_s=30°
γ_s=14°

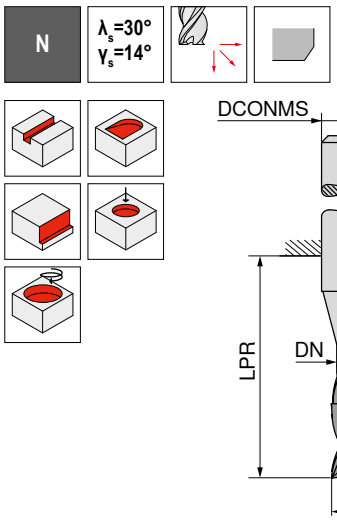

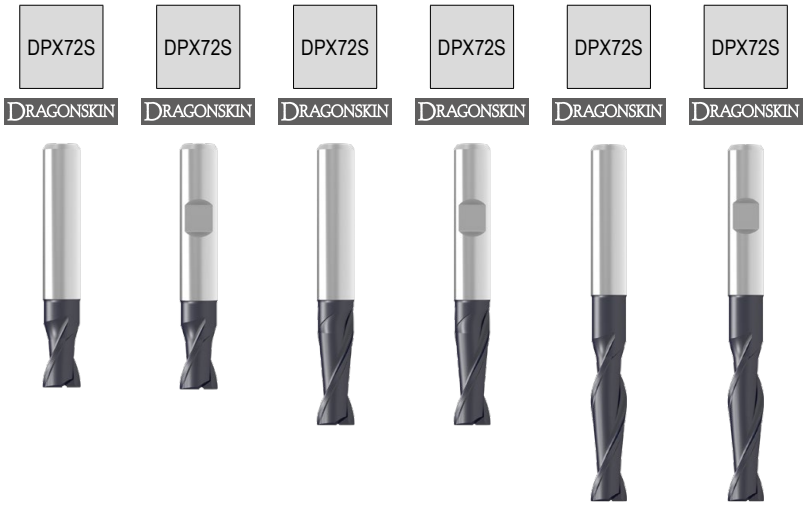

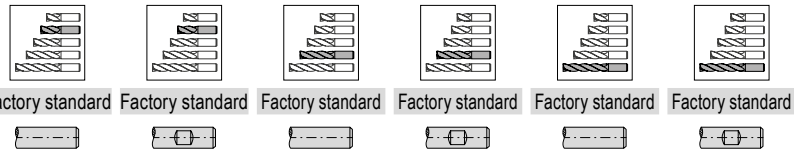

Factory standard

	52 939 ...	52 940 ...	52 945 ...	52 946 ...	52 950 ...	52 951 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP										
7,00	16	6,70	23	34	70	8	0,12	2					07000		07000			
7,75	12	7,45	18	23	59	8	0,12	2	07700		07700							
7,75	16	7,45	23	34	70	8	0,12	2					07700		07700			
8,00	12	7,70	20	23	59	8	0,12	2	08000		08000							
8,00	22	7,70	25	34	70	8	0,12	2					08000		08000			
8,00	40	7,70	60	64	100	8	0,12	2									08000	08000
9,00	13	8,70	22	27	67	10	0,20	2	09000		09000							
9,00	22	8,70	28	33	73	10	0,20	2					09000		09000			
9,70	13	9,40	22	27	67	10	0,20	2	09700		09700							
9,70	22	9,40	28	33	73	10	0,20	2					09700		09700			
10,00	13	9,70	24	27	67	10	0,20	2	10000		10000							
10,00	25	9,70	30	33	73	10	0,20	2					10000		10000			
10,00	40	9,70	55	60	100	10	0,20	2									10000	10000
11,00	25	10,60	32	39	84	12	0,20	2					11000		11000			
12,00	16	11,60	26	28	73	12	0,20	2	12000		12000							
12,00	26	11,60	35	39	84	12	0,20	2					12000		12000			
12,00	45	11,60	50	55	100	12	0,20	2									12000	12000
13,70	26	13,30	35	39	84	14	0,20	2					13700		13700			
14,00	16	13,60	28	30	75	14	0,20	2	14000		14000							
14,00	26	13,60	35	39	84	14	0,20	2					14000		14000			
16,00	20	15,50	32	35	83	16	0,20	2	16000		16000							
16,00	30	15,50	40	45	93	16	0,20	2					16000		16000			
16,00	65	15,50	90	102	150	16	0,20	2									16000	16000
20,00	25	19,50	40	43	93	20	0,30	2	20000		20000							
20,00	40	19,50	50	54	104	20	0,30	2					20000		20000			
20,00	65	19,50	90	100	150	20	0,30	2									20000	20000

P	●	●	●	●	●	●
M	○	○	○	○	○	○
K	●	●	●	●	●	●
N	○	○	○	○	○	○
S	○	○	○	○	○	○
H	○	○	○	○	○	○
O	○	○	○	○	○	○

→ v_c/f_z Page 480–485

End milling cutter





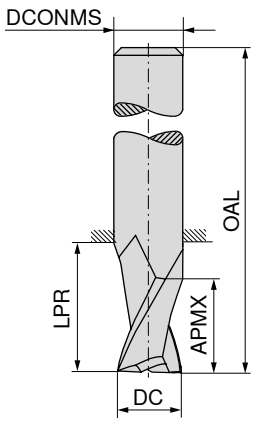

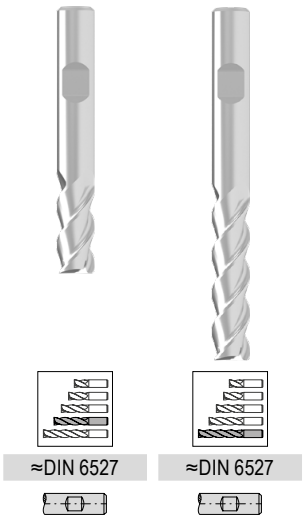

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 614 ...	50 614 ...
3,0	8	21	57	6	3	030	
3,5	11	21	57	6	3	035	
3,5	15	23	59	6	3		036
4,0	11	21	57	6	3	040	
4,0	19	27	63	6	3		041
4,5	13	21	57	6	3	045	
4,5	19	27	63	6	3		046
5,0	13	21	57	6	3	050	
5,0	24	32	68	6	3		051
5,5	13	21	57	6	3	055	
5,5	24	32	68	6	3		056
6,0	13	21	57	6	3	060	
6,0	24	32	68	6	3		061
6,5	16	27	63	8	3	065	
6,5	30	44	80	8	3		066
7,0	16	27	63	8	3	070	
7,0	30	44	80	8	3		071
7,5	19	27	63	8	3	075	
7,5	30	44	80	8	3		076
8,0	19	27	63	8	3	080	
8,0	38	52	88	8	3		081
8,5	19	32	72	10	3	085	
8,5	38	48	88	10	3		086
9,0	19	32	72	10	3	090	
9,0	38	48	88	10	3		091
9,5	22	32	72	10	3	095	
9,5	38	48	88	10	3		096
10,0	22	32	72	10	3	100	
10,0	45	55	95	10	3		101
11,0	26	38	83	12	3	110	
11,0	45	57	102	12	3		111
12,0	26	38	83	12	3	120	
12,0	53	65	110	12	3		121
14,0	26	38	83	14	3	140	
14,0	53	65	110	14	3		141
16,0	32	44	92	16	3	160	
16,0	63	75	123	16	3		161
18,0	32	44	92	18	3	180	
18,0	63	75	123	18	3		181
20,0	38	54	104	20	3	200	
20,0	75	91	141	20	3		201
P						○	○
M						●	●
K						○	○
N						○	○
S						●	●
H							
O						○	○

→ v_c/f_z Page 480–485

End milling cutter

N | λ_s=30° γ_s=13°



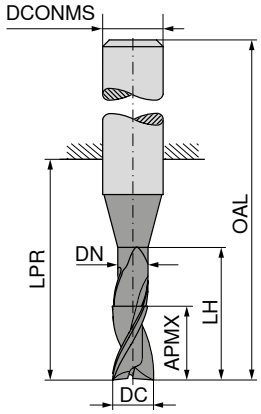

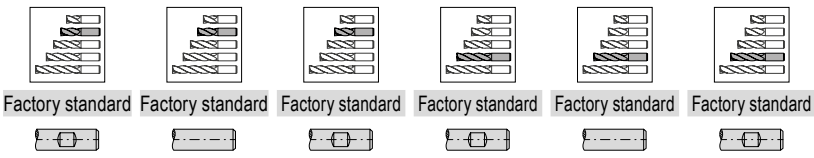

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	52 923 ...	52 921 ...	52 922 ...	52 928 ...	52 926 ...	52 927 ...
1,00	4	0,90	5	22	58	6	3					01000	
1,00	4			22	58	6	3				01000		01000
1,50	3	1,40	6	18	54	6	3	01500	01500	01500			
1,50	3	1,40	6	10	38	3	3		31500				
1,50	6	1,40	7	22	58	6	3					01500	
1,50	6			22	58	6	3				01500		01500
2,00	4	1,90	8	18	54	6	3	02000	02000	02000			
2,00	4	1,90	8	10	38	3	3		32000				
2,00	7	1,90	8	22	58	6	3					02000	
2,00	7			22	58	6	3				02000		02000
2,50	4	2,40	8	18	54	6	3	02500	02500	02500			
2,50	4	2,40	8	10	38	3	3		32500				
2,80	6	2,70	9	18	54	6	3	02800	02800	02800			
3,00	6	2,90	9	18	54	6	3	03000	03000	03000			
3,00	6	2,90	9	10	38	3	3		33000				
3,00	10	2,90	14	22	58	6	3				03000	03000	03000
3,50	6	3,30	9	18	54	6	3	03500	03500	03500			
3,80	6	3,60	12	18	54	6	3	03800	03800	03800			
4,00	7	3,80	12	18	54	6	3	04000	04000	04000			
4,00	13	3,80	17	22	58	6	3				04000	04000	04000
4,50	7	4,30	12	18	54	6	3	04500	04500	04500			
4,80	8	4,60	16	18	54	6	3	04800	04800	04800			
5,00	8	4,80	16	18	54	6	3	05000	05000	05000			
5,00	15	4,80	19	22	58	6	3				05000	05000	05000
5,50	8	5,30	16	18	54	6	3	05500	05500	05500			
5,75	8	5,55	16	18	54	6	3	05700	05700	05700			
6,00	10	5,80	16	18	54	6	3	06000	06000	06000			
6,00	16	5,80	20	22	58	6	3				06000	06000	06000
7,00	19	6,70	23	28	64	8	3				07000	07000	07000
7,75	10	7,45	18	22	58	8	3	07700	07700	07700			
8,00	12	7,70	20	23	59	8	3	08000	08000	08000			
8,00	22	7,70	26	34	70	8	3				08000	08000	08000
9,00	23	8,70	28	32	72	10	3				09000	09000	09000
9,70	12	9,40	18	19	59	10	3	09700	09700	09700			
10,00	13	9,70	24	27	67	10	3	10000	10000	10000			
10,00	25	9,70	31	33	73	10	3				10000	10000	10000
11,00	25	10,60	34	38	83	12	3				11000	11000	11000
11,70	16	11,30	20	22	67	12	3	11700	11700	11700			

P	●	●	●	●	●	●
M	○	○	○	○	○	○
K	●	●	●	●	●	●
N	○	○	○	○	○	○
S	○	○	○	○	○	○
H		○	○		○	○
O	○	○	○	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter

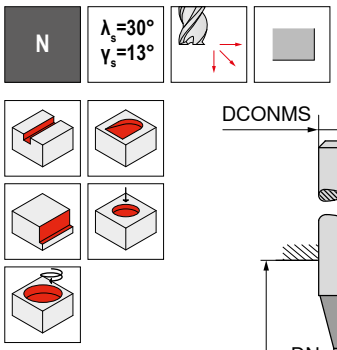

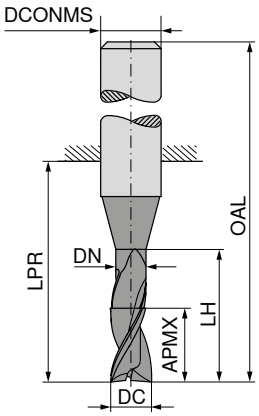

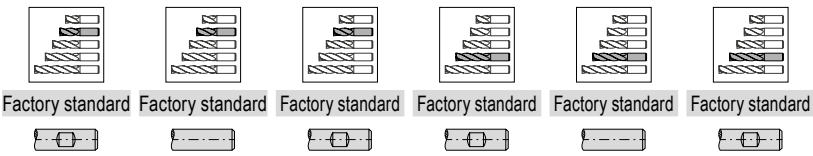

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 923 ...		52 921 ...		52 922 ...		52 928 ...		52 926 ...		52 927 ...	
12,00	16	11,60	26	28	73	12	3		**12000**		**12000**		**12000**						
12,00	26	11,60	37	39	84	12	3								**12000**		**12000**		**12000**
14,00	16	13,60	28	30	75	14	3		**14000**		**14000**		**14000**						
14,00	26	13,60	37	39	84	14	3								**14000**		**14000**		**14000**
16,00	20	15,50	32	35	83	16	3		**16000**		**16000**		**16000**						
16,00	32	15,50	43	45	93	16	3								**16000**		**16000**		**16000**
20,00	25	19,50	40	43	93	20	3		**20000**		**20000**		**20000**						
20,00	40	19,50	52	54	104	20	3								**20000**		**20000**		**20000**
P									●		●		●		●		●		●
M									○		○		○		○		○		○
K									●		●		●		●		●		●
N									○		○		○		○		○		○
S									○		○		○		○		○		○
H											○		○				○		○
O									○		○		○		○		○		○

→ v_c/f_z Page 480–483

End milling cutter

N

λ_s=38°
γ_s=4°



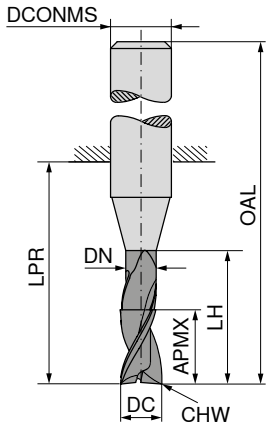

DPX72S DRAGONSKIN | DPX72S DRAGONSKIN | DPX72S DRAGONSKIN | DPX72S DRAGONSKIN

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

									52 931 ...		52 929 ...		52 930 ...		52 934 ...		52 932 ...		52 933 ...	
DC $_{e8}$	APMX	DN	LH	LPR	OAL	CHW	DCONMS $_{h6}$	ZEFP												
mm	mm	mm	mm	mm	mm	mm	mm													
2,0	4	1,9	8	18	54	0,04	6	3	02000		02000		02000							
2,0	7	1,9	10	22	58	0,04	6	3							02000		02000		02000	
2,5	5	2,4	8	18	54	0,07	6	3	02500		02500		02500							
3,0	6	2,9	9	18	54	0,07	6	3	03000		03000		03000							
3,0	10	2,9	14	22	58	0,07	6	3							03000		03000		03000	
4,0	7	3,8	12	18	54	0,07	6	3	04000		04000		04000							
4,0	13	3,8	17	22	58	0,07	6	3							04000		04000		04000	
5,0	8	4,8	16	18	54	0,12	6	3	05000		05000		05000							
5,0	15	4,8	19	22	58	0,07	6	3							05000		05000		05000	
6,0	10	5,8	16	18	54	0,12	6	3	06000		06000		06000							
6,0	16	5,8	20	22	58	0,12	6	3							06000		06000		06000	
7,0	11	6,7	18	23	59	0,12	8	3	07000		07000		07000							
7,0	19	6,7	23	34	70	0,12	8	3							07000		07000		07000	
8,0	12	7,7	20	23	59	0,12	8	3	08000		08000		08000							
8,0	22	7,7	26	34	70	0,12	8	3							08000		08000		08000	
9,0	13	8,7	22	27	67	0,20	10	3	09000		09000		09000							
9,0	23	8,7	28	33	73	0,12	10	3							09000		09000		09000	
10,0	14	9,7	24	27	67	0,20	10	3	10000		10000		10000							
10,0	25	9,7	31	33	73	0,20	10	3							10000		10000		10000	
12,0	16	11,6	26	28	73	0,20	12	3	12000		12000		12000							
12,0	28	11,6	37	39	84	0,20	12	3							12000		12000		12000	
14,0	18	13,6	28	30	75	0,20	14	3	14000		14000		14000							
14,0	30	13,6	37	39	84	0,20	14	3							14000		14000		14000	
16,0	20	15,5	32	35	83	0,20	16	3	16000		16000		16000							
16,0	35	15,5	43	45	93	0,20	16	3							16000		16000		16000	
20,0	25	19,5	40	43	93	0,30	20	3	20000		20000		20000							
20,0	40	19,5	52	54	104	0,20	20	3							20000		20000		20000	
P									○		○		○		○		○		○	
M									●		●		●		●		●		●	
K									○		○		○		○		○		○	
N									●		●		●		●		●		●	
S									●		●		●		●		●		●	
H																				
O									●		●		●		●		●		●	

→ v_c/f_z Page 480–483

End milling cutter



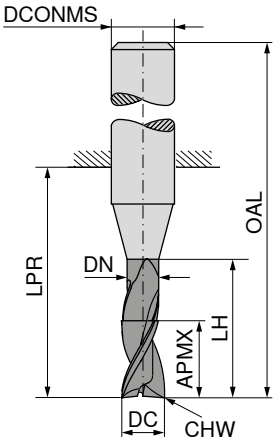

DC e8 mm	DN mm	APMX mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 935 ...	52 936 ...
3	3,0	20	20	24	60	6	0,07	3	**03000**	**03000**
4	3,8	30	35	39	75	6	0,07	3	**04000**	**04000**
5	4,8	30	35	39	75	6	0,12	3	**05000**	**05000**
6	5,8	40	60	64	100	6	0,12	3	**06000**	**06000**
8	7,7	40	60	64	100	8	0,12	3	**08000**	**08000**
10	9,7	40	55	60	100	10	0,20	3	**10000**	**10000**
12	11,6	45	50	55	100	12	0,20	3	**12000**	**12000**
14	13,6	45	50	55	100	14	0,20	3	**14000**	**14000**
16	15,5	65	90	102	150	16	0,20	3	**16000**	**16000**
20	19,5	65	90	100	150	20	0,30	3	**20000**	**20000**

P	○	○
M	●	●
K	○	○
N	●	●
S	●	●
H		
O	●	●

→ v_c/f_z Page 480–485

Mini milling cutter

▲ Shank similar to DIN 6535



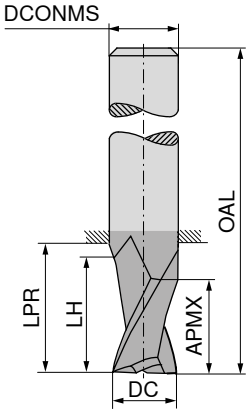



DC e8 mm	APMX mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	Factory standard 50 598 ...	Factory standard 50 599 ...
2,00	4	4,0	10	35	6	3	020	020
2,50	4	4,0	10	35	6	3	025	025
3,00	5	5,0	10	36	6	3	030	030
3,50	5	5,0	10	36	6	3	035	035
4,00	7	7,0	12	38	6	3	040	040
4,50	7	7,0	12	38	6	3	045	045
5,00	8	8,0	13	39	6	3	050	050
5,50	8	8,0	13	39	6	3	055	055
5,75	8	8,0	13	39	6	3	057	057
6,00	8	8,5	13	39	6	3	060	060
6,75	11	11,5	16	43	8	3	067	067
7,00	11	11,5	16	43	8	3	070	070
7,75	11	11,5	16	43	8	3	077	077
8,00	11	11,5	16	43	8	3	080	080
8,70	13	13,5	18	50	10	3	087	087
9,00	13	13,5	18	50	10	3	090	090
9,70	13	13,5	18	50	10	3	097	097
10,00	13	13,5	18	50	10	3	100	100
12,00	15	15,5	24	55	12	3	120	120
14,00	15	15,5	26	58	14	3	140	140
16,00	18	18,5	28	62	16	3	160	160
18,00	20	20,5	35	70	18	3	180	180
20,00	22	22,5	40	75	20	3	200	200
P							○	●
M							○	○
K							○	●
N							●	○
S							○	○
H								○
O							●	○

→ v_c/f_z Page 480–483

Mini milling cutter

▲ Shank similar to DIN 6535



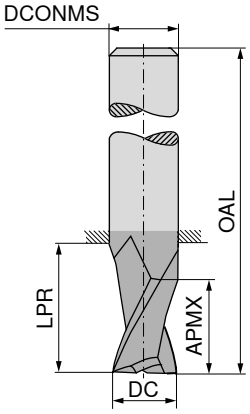

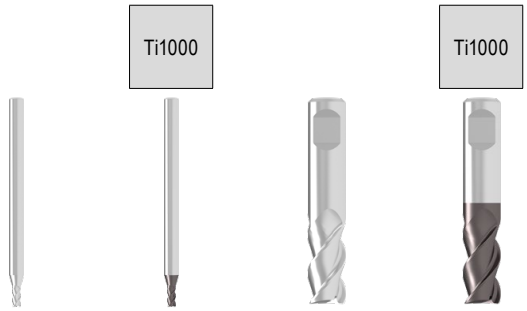

						Factory standard	Factory standard	Factory standard	Factory standard
						50 664 ...	50 691 ...	50 664 ...	50 691 ...
DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP				
0,50	1,5	17	45	3	3	30500	30500		
1,00	2,0	12	45	6	3			01000	01000
1,00	2,0	17	45	3	3	31000	31000		
1,20	2,0	12	45	6	3			01200	01200
1,20	3,0	17	45	3	3	31200	31200		
1,50	3,0	12	45	6	3			01500	01500
1,50	3,0	17	45	3	3	31500	31500		
1,80	3,0	12	45	6	3			01800	01800
1,80	3,0	17	45	3	3	31800	31800		
2,00	4,0	13	45	6	3			02000	02000
2,50	6,0	13	45	6	3			02500	02500
2,80	6,0	13	45	6	3			02800	02800
3,00	6,0	13	45	6	3			03000	03000
3,50	7,0	13	45	6	3			03500	03500
3,80	7,0	13	45	6	3			03800	03800
4,00	7,0	12	45	6	3			04000	04000
4,50	8,0	11	45	6	3			04500	04500
4,80	8,0	11	45	6	3			04800	04800
5,00	8,0	11	45	6	3			05000	05000
5,50	8,0	9	45	6	3			05500	05500
5,75	8,0	9	45	6	3			05700	05700
6,00	8,0	9	45	6	3			06000	06000
6,70	10,0	19	55	8	3			06700	06700
7,00	12,0	19	55	8	3			07000	07000
7,70	12,0	19	55	8	3			07700	07700
8,00	13,0	19	55	8	3			08000	08000
8,70	14,0	17	55	10	3			08700	08700
9,00	16,0	17	55	10	3			09000	09000
9,70	16,0	17	55	10	3			09700	09700
10,00	16,0	17	55	10	3			10000	10000
P							●		●
M							●		●
K							●		●
N						●	○	●	○
S						○	●	○	●
H									
O									

→ v_c/f_z Page 456–459

Mini milling cutter

▲ Shank similar to DIN 6535



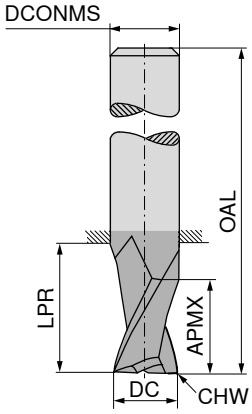

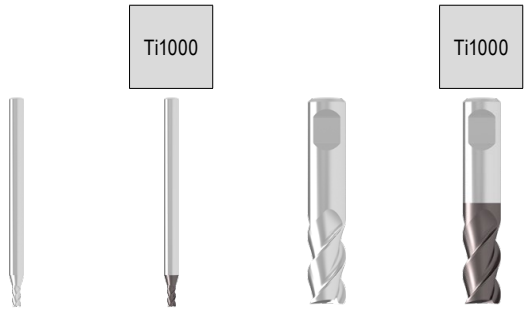

							Factory standard	Factory standard	Factory standard	Factory standard
							50 608 ...	50 609 ...	50 608 ...	50 609 ...
DC e8 mm	CHW mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP				
0,50	0,05	1,5	17	45	3	3	30500	30500		
1,00	0,05	2,0	12	45	6	3			01000	01000
1,00	0,05	2,0	17	45	3	3	31000	31000		
1,20	0,05	2,0	12	45	6	3			01200	01200
1,20	0,05	3,0	17	45	3	3	31200	31200		
1,50	0,05	3,0	12	45	6	3			01500	01500
1,50	0,05	3,0	17	45	3	3	31500	31500		
1,80	0,05	3,0	12	45	6	3			01800	01800
1,80	0,05	3,0	17	45	3	3	31800	31800		
2,00	0,05	4,0	13	45	6	3			020	02000
2,50	0,05	6,0	13	45	6	3			025	02500
2,80	0,05	6,0	13	45	6	3			02800	02800
3,00	0,10	6,0	13	45	6	3			030	03000
3,50	0,10	7,0	13	45	6	3			03500	03500
3,80	0,10	7,0	13	45	6	3			03800	03800
4,00	0,10	7,0	12	45	6	3			040	04000
4,50	0,10	8,0	11	45	6	3			04500	04500
4,80	0,10	8,0	11	45	6	3			04800	04800
5,00	0,10	8,0	11	45	6	3			050	05000
5,50	0,10	8,0	9	45	6	3			05500	05500
5,75	0,10	8,0	9	45	6	3			05700	05700
6,00	0,10	8,0	9	45	6	3			060	06000
6,70	0,10	10,0	19	55	8	3			06700	06700
7,00	0,10	12,0	19	55	8	3			070	07000
7,70	0,10	12,0	19	55	8	3			07700	07700
8,00	0,10	13,0	19	55	8	3			080	08000
8,70	0,10	14,0	17	55	10	3			08700	08700
9,00	0,10	16,0	17	55	10	3			09000	09000
9,70	0,10	16,0	17	55	10	3			09700	09700
10,00	0,10	16,0	17	55	10	3			100	10000
P								●		●
M								●		●
K								●		●
N							●	○	●	○
S							○	●	○	●
H										
O										

14

→ v_c/f_z Page 456–459

End milling cutter



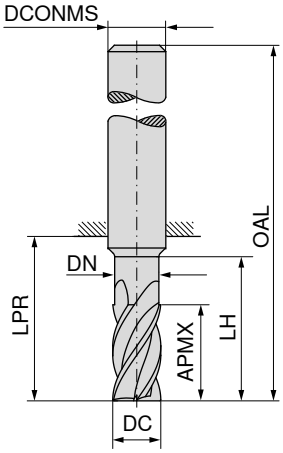

Factory standard

Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 209 ...	52 213 ...
2	4	1,9	8	18	54	6	4	02000	
2	7			22	58	6	4		02000
3	6	2,9	9	18	54	6	4	03000	
3	10	2,8	14	22	58	6	4		03000
4	7	3,8	12	18	54	6	4	04000	
4	13	3,8	17	22	58	6	4		04000
5	8	4,8	16	18	54	6	4	05000	
5	15	4,8	19	22	58	6	4		05000
6	10	5,8	16	18	54	6	4	06000	
6	16	5,7	20	22	58	6	4		06000
7	19	6,7	23	27	63	8	4		07000
8	12	7,7	20	22	58	8	4	08000	
8	22	7,7	26	34	70	8	4		08000
9	23	8,7	28	33	73	10	4		09000
10	14	9,7	24	26	66	10	4	10000	
10	25	9,6	31	33	73	10	4		10000
11	26	10,6	34	39	84	12	4		11000
12	16	11,6	26	28	73	12	4	12000	
12	28	11,6	37	39	84	12	4		12000
14	18	13,6	28	30	75	14	4	14000	
14	30	13,6	37	39	84	14	4		14000
16	22	15,5	32	34	82	16	4	16000	
16	35	15,6	43	45	93	16	4		16000
18	20	17,5	34	32	80	18	4	18000	
18	35	17,6	43	45	93	18	4		18000
20	25	19,5	40	42	92	20	4	20000	
20	40	19,6	52	54	104	20	4		20000

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 480–483

End milling cutter

▲ Cutting edges with irregular pitch

N | λ_s=30° γ_s=12° | HPC



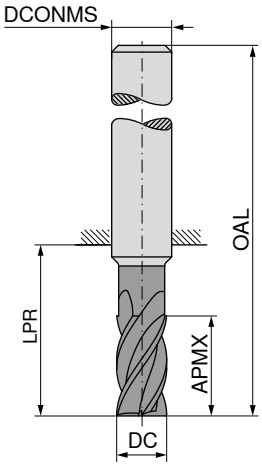

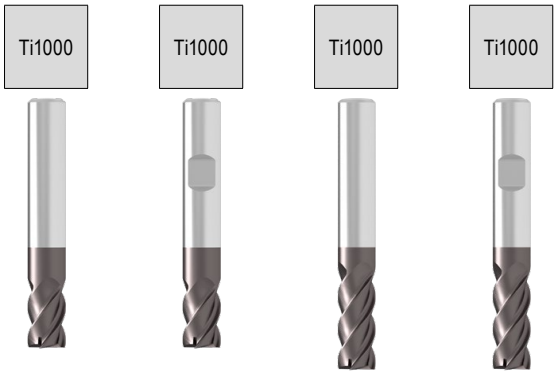



						DIN 6527		DIN 6527		DIN 6527		≈DIN 6527	
						52 121 ...		52 131 ...		52 126 ...		52 132 ...	
DC $_{e8}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP								
3,0	6	18	54	6	4	030		030					
3,0	10	22	58	6	4					030		030	
3,5	7	18	54	6	4	035		035					
3,5	13	22	58	6	4					035		035	
4,0	7	18	54	6	4	040		040					
4,0	13	22	58	6	4					040		040	
4,5	8	18	54	6	4	045		045					
4,5	15	22	58	6	4					045		045	
5,0	8	18	54	6	4	050		050					
5,0	15	22	58	6	4					050		050	
6,0	10	18	54	6	4	060		060					
6,0	16	22	58	6	4					060		060	
8,0	12	23	59	8	4	080		080					
8,0	22	34	70	8	4					080		080	
10,0	14	27	67	10	4	100		100					
10,0	25	33	73	10	4					100		100	
12,0	16	28	73	12	4	120		120					
12,0	28	39	84	12	4					120		120	
14,0	16	30	75	14	4	140		140					
14,0	30	39	84	14	4					140		140	
16,0	20	35	83	16	4	160		160					
16,0	35	45	93	16	4					160		160	
18,0	20	32	80	18	4	180		180					
18,0	35	45	93	18	4					180		180	
20,0	25	43	93	20	4	200		200					
20,0	40	54	104	20	4					200		200	
P						●		●		●		●	
M						○		○		○		○	
K						●		●		●		●	
N						○		○		○		○	
S						○		○		○		○	
H						○		○		○		○	
O						○		○		○		○	

→ v_c/f_z Page 480–483

End milling cutter



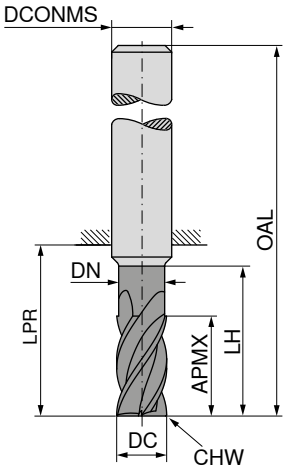

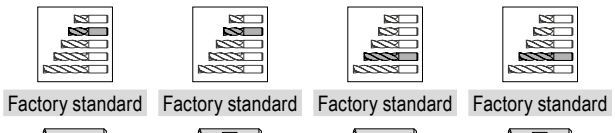

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 206 ...	52 207 ...	52 210 ...	52 211 ...
1,5	3	1,4	6	10	38	3	0,02	4	31500			
2,0	4	1,9	8	10	38	3	0,03	4	32000			
2,0	4	1,9	8	18	54	6	0,03	4	02000	02000		
2,0	7			10	38	2	0,03	4			22000	
2,5	4	2,4	8	10	38	3	0,04	4	32500			
3,0	6	2,9	9	10	38	3	0,04	4	33000			
3,0	6	2,9	9	18	54	6	0,04	4	03000	03000		
3,0	10	2,8	14	14	38	3	0,03	4			33000	
4,0	7	3,8	12	18	54	6	0,05	4	04000	04000		
4,0	13	3,8	17	22	50	4	0,04	4			44000	
5,0	8	4,8	16	18	54	6	0,06	4	05000	05000		
5,0	15	4,8	19	22	50	5	0,04	4			55000	
6,0	10	5,8	16	18	54	6	0,07	4	06000	06000		
6,0	16	5,7	20	22	58	6	0,04	4			06000	06000
7,0	19	6,7	23	27	63	8	0,05	4			07000	07000
8,0	12	7,7	20	22	58	8	0,08	4	08000	08000		
8,0	22	7,7	26	34	70	8	0,06	4			08000	08000
9,0	23	8,7	28	33	73	10	0,07	4			09000	09000
10,0	14	9,7	24	26	66	10	0,10	4	10000	10000		
10,0	25	9,6	31	33	73	10	0,08	4			10000	10000
11,0	26	10,6	34	39	84	12	0,10	4			11000	11000
12,0	16	11,6	26	28	73	12	0,13	4	12000	12000		
12,0	28	11,6	37	39	84	12	0,13	4			12000	12000
14,0	18	13,6	28	30	75	14	0,15	4	14000	14000		
14,0	30	13,6	37	39	84	14	0,15	4			14000	14000
16,0	22	15,5	32	34	82	16	0,18	4	16000	16000		
16,0	35	15,6	43	45	93	16	0,18	4			16000	16000
20,0	25	19,5	40	42	92	20	0,20	4	20000	20000		
20,0	40	19,6	52	54	104	20	0,20	4			20000	20000
P									●	●	●	●
M									○	○	○	○
K									●	●	●	●
N									○	○	○	○
S									○	○	○	○
H									○	○	○	○
O									○	○	○	○

→ v_c/f_z Page 480–483

End milling cutter

▲ Transition angle α = 30°



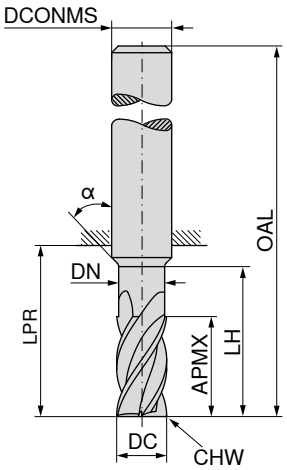

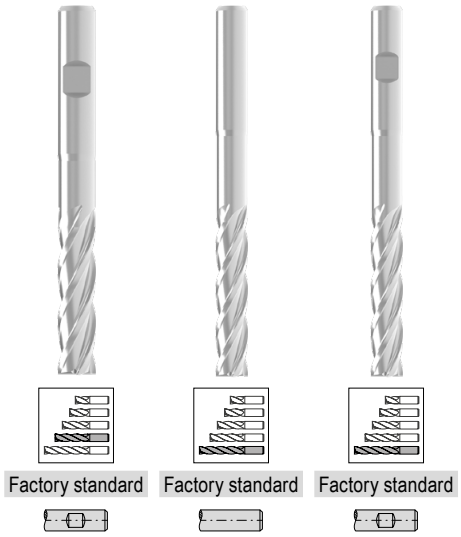

			52 221 ...	52 215 ...	52 220 ...
			Factory standard	Factory standard	Factory standard

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP			
mm	mm	mm	mm	mm	mm	mm	mm				
3	16	2,8	32	47	75	3	0,04	4		**33000**	
4	16	3,8	32	47	75	4	0,05	4		**44000**	
4	20	3,8	48	72	100	4	0,05	4		**44100**	
5	20	4,8	35	47	75	5	0,06	4		**55000**	
5	25	4,8	55	72	100	5	0,06	4		**55100**	
6	24	5,8	42	44	80	6	0,07	4	**06000**		
6	30	5,8	62	64	100	6	0,07	4			**06000**
8	32	7,8	60	64	100	8	0,08	4	**08000**		
8	40	7,8	75	84	120	8	0,08	4			**08000**
10	40	9,8	58	60	100	10	0,10	4	**10000**		
10	50	9,8	78	80	120	10	0,10	4			**10000**
12	48	11,8	60	75	120	12	0,13	4	**12000**		
12	60	11,8	90	105	150	12	0,13	4			**12000**
14	45	13,8	50	55	100	14	0,15	4	**14000**		
14	56	13,8	95	105	150	14	0,15	4			**14000**
16	50	15,8	70	77	125	16	0,18	4	**16000**		
16	65	15,8	95	102	150	16	0,18	4			**16000**
18	72	17,8	95	102	150	18	0,18	4			**18000**
20	60	19,8	80	85	135	20	0,20	4	**20000**		
20	80	19,8	95	100	150	20	0,20	4			**20000**
25	75	24,5	90	94	150	25	0,25	4	**25000**		

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–485

End milling cutter

▲ Transition angle α = 30°



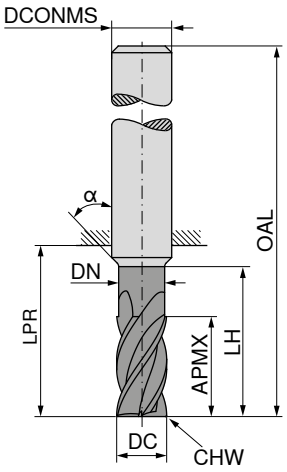

Factory standard | Factory standard | Factory standard



DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 219 ...	52 214 ...	52 222 ...
3	16	2,8	32	47	75	3	0,04	4		33000	
4	16	3,8	32	47	75	4	0,05	4		44000	
4	20	3,8	48	72	100	4	0,05	4		44100	
5	20	4,8	35	47	75	5	0,06	4		55000	
5	25	4,8	55	72	100	5	0,06	4		55100	
6	24	5,8	42	44	80	6	0,07	4	06000		
6	30	5,8	62	64	100	6	0,07	4			06000
8	32	7,8	60	64	100	8	0,08	4	08000		
8	40	7,8	75	84	120	8	0,08	4			08000
10	40	9,8	58	60	100	10	0,10	4	10000		
10	50	9,8	78	80	120	10	0,10	4			10000
12	48	11,8	60	75	120	12	0,13	4	12000		
12	60	11,8	90	105	150	12	0,13	4			12000
14	45	13,8	50	55	100	14	0,15	4	14000		
14	56	13,8	95	105	150	14	0,15	4			14000
16	50	15,8	70	77	125	16	0,18	4	16000		
16	65	15,8	95	102	150	16	0,18	4			16000
18	72	17,8	95	102	150	18	0,18	4			18000
20	60	19,8	80	85	135	20	0,20	4	20000		
20	80	19,8	95	100	150	20	0,20	4			20000
25	75	24,5	90	94	150	25	0,25	4	25000		

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–485

End milling cutter with corner radius

▲ optimal quiet running with irregular helix

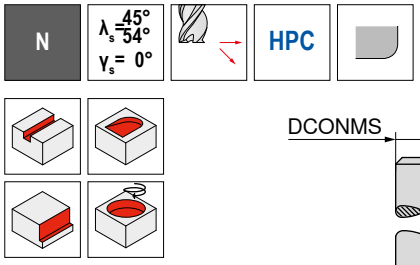

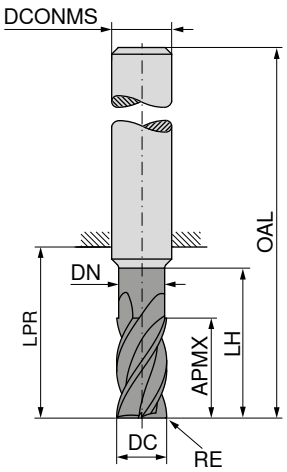



Factory standard

52 102 ...

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	
2	0,2	7	1,8	11	58	6	4	**022**
3	0,3	8	2,8	13	58	6	4	**033**
4	0,4	11	3,8	16	58	6	4	**044**
5	0,5	13	4,8	18	58	6	4	**055**
6	0,5	16	5,8	26	58	6	4	**065**
6	1,0	16	5,8	26	58	6	4	**066**
8	0,5	22	7,8	32	64	8	4	**085**
8	1,0	22	7,8	32	64	8	4	**086**
8	1,5	22	7,8	32	64	8	4	**087**
10	0,5	25	9,8	35	73	10	4	**105**
10	1,0	25	9,8	35	73	10	4	**106**
10	1,5	25	9,8	35	73	10	4	**107**
12	0,5	28	11,8	38	84	12	4	**125**
12	1,0	28	11,8	38	84	12	4	**126**
12	1,5	28	11,8	38	84	12	4	**127**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–483

End milling cutter with corner radius



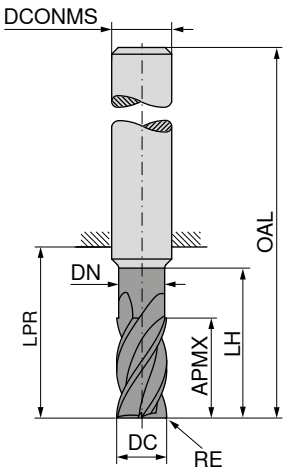



DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 231 ...	52 232 ...
3	0,3	8	2,8	13	21	57	6	4	03003	03003
3	0,5	8	2,8	13	21	57	6	4	03005	03005
4	0,3	11	3,8	16	21	57	6	4	04003	04003
4	0,5	11	3,8	16	21	57	6	4	04005	04005
5	0,3	13	4,8	18	21	57	6	4	05003	05003
5	0,5	13	4,8	18	21	57	6	4	05005	05005
6	0,5	13	5,8	26	21	57	6	4	06005	06005
6	1,0	13	5,8	26	21	57	6	4	06010	06010
6	1,5	13	5,8	26	21	57	6	4	06015	06015
8	0,5	19	7,8	32	27	63	8	4	08005	08005
8	1,0	19	7,8	32	27	63	8	4	08010	08010
8	1,5	19	7,8	32	27	63	8	4	08015	08015
8	2,0	19	7,8	32	27	63	8	4	08020	08020
10	1,0	22	9,8	35	32	72	10	4	10010	10010
10	1,5	22	9,8	35	32	72	10	4	10015	10015
10	2,0	22	9,8	35	32	72	10	4	10020	10020
12	1,0	26	11,8	38	38	83	12	4	12010	12010
12	1,5	26	11,8	38	38	83	12	4	12015	12015
12	2,0	26	11,8	38	38	83	12	4	12020	12020
12	3,0	26	11,8	38	38	83	12	4	12030	12030
16	1,0	32	15,8	44	44	92	16	4	16010	16010
16	1,5	32	15,8	44	44	92	16	4	16015	16015
16	2,0	32	15,8	44	44	92	16	4	16020	16020
16	3,0	32	15,8	44	44	92	16	4	16030	16030
20	1,5	38	19,8	52	54	104	20	4	20015	20015
20	2,0	38	19,8	52	54	104	20	4	20020	20020
20	3,0	38	19,8	52	54	104	20	4	20030	20030
P									●	●
M									○	○
K									●	●
N									○	○
S									○	○
H									○	○
O									○	○

→ v_c/f_z Page 480–483

End milling cutter

N | λ_s 35° 38° | γ_s 9° | HPC

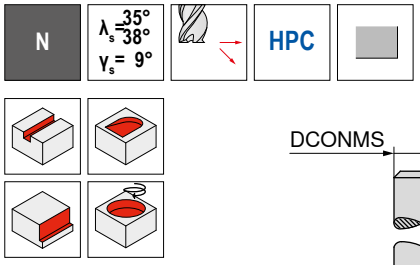

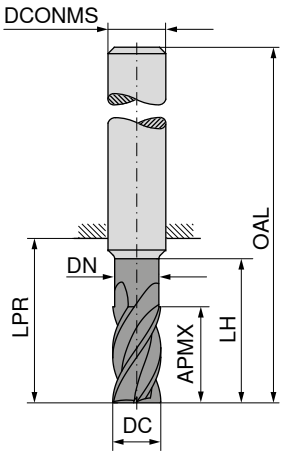

NEW Ti1000 | NEW Ti1000 | NEW Ti1000



≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527



DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 070 ...	54 070 ...	54 070 ...
3	5			14	50	6	4	03100		
3	8	2,8	13	21	57	6	4		03200	
3	8	2,8	15	22	69	6	4			03400
4	8			18	54	6	4	04100		
4	11	3,8	17	21	57	6	4		04200	
4	11	3,8	20	26	69	6	4			04400
5	9			18	54	6	4	05100		
5	13	4,8	19	21	57	6	4		05200	
5	13	4,8	25	34	69	6	4			05400
6	10			18	54	6	4	06100		
6	13	5,8	19	21	57	6	4		06200	
6	13	5,8	30	34	69	6	4			06400
8	12			22	58	8	4	08100		
8	17	7,7	40	44	79	8	4			08400
8	21	7,7	25	27	63	8	4		08200	
10	14			26	66	10	4	10100		
10	21	9,7	50	54	93	10	4			10400
10	22	9,7	30	32	72	10	4		10200	
12	16			28	73	12	4	12100		
12	25	11,6	60	64	108	12	4			12400
12	26	11,6	36	38	83	12	4		12200	
16	22			34	82	16	4	16100		
16	32	15,5	42	44	92	16	4		16200	
16	33	15,5	80	84	132	16	4			16400
20	26			42	92	20	4	20100		
20	41	19,5	52	54	104	20	4		20200	
20	42	19,5	100	104	154	20	4			20400

P	●	●	●
M	●	●	○
K	●	●	●
N	○	○	
S	○	○	
H			
O			

→ v_c/f_z Page 462–467

End milling cutter

N | λ_s 35° 38° | γ_s 9° | HPC



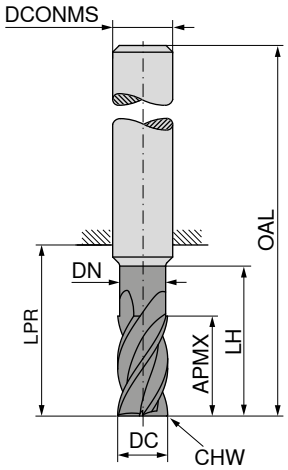

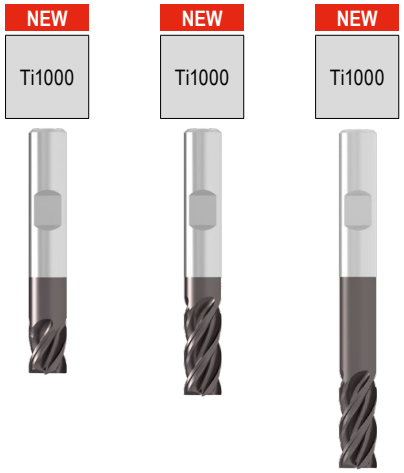



≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527



DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	54 071 ...	54 071 ...	54 071 ...
3	5			14	50	6	0,1	4	03100		
3	8	2,8	13	21	57	6	0,1	4		03200	
3	8	2,8	15	22	69	6	0,1	4			03400
4	8			18	54	6	0,1	4	04100		
4	11	3,8	17	21	57	6	0,1	4		04200	
4	11	3,8	20	26	69	6	0,1	4			04400
5	9			18	54	6	0,1	4	05100		
5	13	4,8	19	21	57	6	0,1	4		05200	
5	13	4,8	25	34	69	6	0,1	4			05400
6	10			18	54	6	0,1	4	06100		
6	13	5,8	19	21	57	6	0,1	4		06200	
6	13	5,8	30	34	69	6	0,1	4			06400
8	12			22	58	8	0,2	4	08100		
8	17	7,7	40	44	79	8	0,2	4			08400
8	21	7,7	25	27	63	8	0,2	4		08200	
10	14			26	66	10	0,2	4	10100		
10	21	9,7	50	54	93	10	0,2	4			10400
10	22	9,7	30	32	72	10	0,2	4		10200	
12	16			28	73	12	0,3	4	12100		
12	25	11,6	60	64	108	12	0,3	4			12400
12	26	11,6	36	38	83	12	0,3	4		12200	
16	22			34	82	16	0,3	4	16100		
16	33	15,5	80	84	132	16	0,3	4			16400
16	36	15,5	42	44	92	16	0,3	4		16200	
20	26			42	92	20	0,3	4	20100		
20	41	19,5	52	54	104	20	0,3	4		20200	
20	42	19,5	100	104	154	20	0,3	4			20400
P									●	●	●
M									●	●	○
K									●	●	●
N									○	○	
S									○	○	
H											
O											

→ v_c/f_z Page 462–467

End milling cutter

▲ Cutting depth: 3 x DC

N | λ_s = 35° 36° | γ_s = 9° | HPC



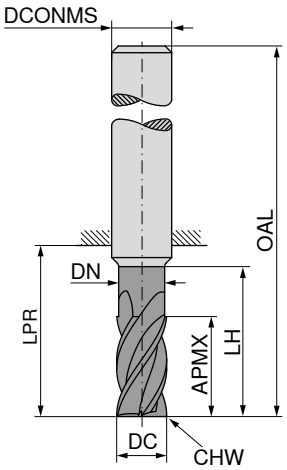

NEW

Ti1000

≈DIN 6527

54 078 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6	19	5,8	24	26	62	6	0,1	4	**06200**
8	25	7,7	30	32	68	8	0,2	4	**08200**
10	31	9,7	38	40	80	10	0,2	4	**10200**
12	37	11,6	46	48	93	12	0,2	4	**12200**
16	49	15,5	58	60	108	16	0,3	4	**16200**
20	61	19,5	74	76	126	20	0,3	4	**20200**

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c/f_z Page 464+465

End milling cutter with corner radius

N | λ_s = 35° γ_s = 9° | HPC



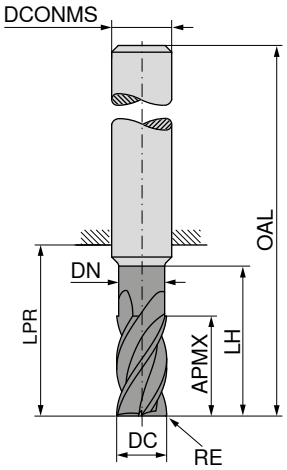

NEW | Ti1000

≈DIN 6527

54 072 ...

NEW | Ti1000

≈DIN 6527

54 072 ...

DC h10 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP		
3	0,1	8	2,8	13	21	57	6	4	**03201**	
3	0,3	8	2,8	13	21	57	6	4	**03203**	
3	0,5	8	2,8	13	21	57	6	4	**03205**	
3	1,0	8	2,8	13	21	57	6	4	**03210**	
3	0,5	8	2,8	15	22	69	6	4		**03405**
3	0,3	8	2,8	15	22	69	6	4		**03403**
3	1,0	8	2,8	15	22	69	6	4		**03410**
4	0,1	11	3,8	17	21	57	6	4	**04201**	
4	0,3	11	3,8	17	21	57	6	4	**04203**	
4	0,5	11	3,8	17	21	57	6	4	**04205**	
4	1,0	11	3,8	17	21	57	6	4	**04210**	
4	0,5	11	3,8	20	26	69	6	4		**04405**
4	0,3	11	3,8	20	26	69	6	4		**04403**
4	1,0	11	3,8	20	26	69	6	4		**04410**
5	0,5	13	4,8	19	21	57	6	4	**05205**	
5	0,1	13	4,8	19	21	57	6	4	**05201**	
5	0,3	13	4,8	19	21	57	6	4	**05203**	
5	1,0	13	4,8	19	21	57	6	4	**05210**	
5	0,5	13	4,8	25	34	69	6	4		**05405**
5	0,3	13	4,8	25	34	69	6	4		**05403**
5	1,0	13	4,8	25	34	69	6	4		**05410**
6	0,3	13	5,8	19	21	57	6	4	**06203**	
6	0,1	13	5,8	19	21	57	6	4	**06201**	
6	0,5	13	5,8	19	21	57	6	4	**06205**	
6	1,0	13	5,8	19	21	57	6	4	**06210**	
6	1,5	13	5,8	19	21	57	6	4	**06215**	
6	2,0	13	5,8	19	21	57	6	4	**06220**	
6	1,0	13	5,8	30	34	69	6	4		**06410**
6	0,3	13	5,8	30	34	69	6	4		**06403**
6	0,5	13	5,8	30	34	69	6	4		**06405**
6	1,5	13	5,8	30	34	69	6	4		**06415**
6	2,0	13	5,8	30	34	69	6	4		**06420**
8	0,5	17	7,7	40	44	79	8	4		**08405**
8	0,3	17	7,7	40	44	79	8	4		**08403**
8	1,0	17	7,7	40	44	79	8	4		**08410**
8	1,5	17	7,7	40	44	79	8	4		**08415**
8	2,0	17	7,7	40	44	79	8	4		**08420**
8	0,1	21	7,7	25	27	63	8	4	**08201**	
8	0,3	21	7,7	25	27	63	8	4	**08203**	
8	0,5	21	7,7	25	27	63	8	4	**08205**	

P	●	●
M	●	○
K	●	●
N	○	
S	○	
H		
O		

→ v_c/f_z Page 462–467

Continued on next page

End milling cutter with corner radius

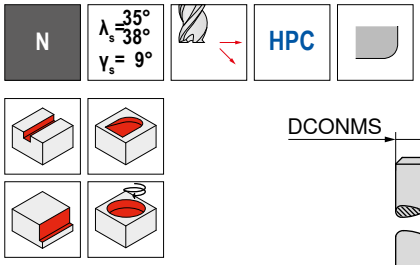

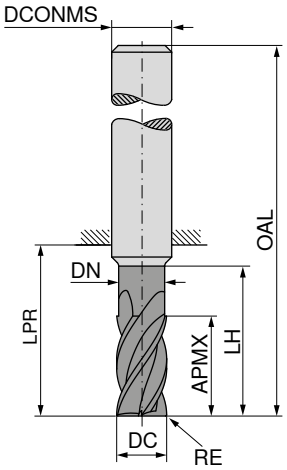

≈DIN 6527 ≈DIN 6527

DC h10 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 072 ...	54 072 ...
8	1,0	21	7,7	25	27	63	8	4	08210	
8	1,5	21	7,7	25	27	63	8	4	08215	
8	2,0	21	7,7	25	27	63	8	4	08220	
10	1,0	21	9,7	50	54	93	10	4		10410
10	0,3	21	9,7	50	54	93	10	4		10403
10	0,5	21	9,7	50	54	93	10	4		10405
10	1,5	21	9,7	50	54	93	10	4		10415
10	2,0	21	9,7	50	54	93	10	4		10420
10	0,5	22	9,7	30	32	72	10	4	10205	
10	0,1	22	9,7	30	32	72	10	4	10201	
10	0,3	22	9,7	30	32	72	10	4	10203	
10	1,0	22	9,7	30	32	72	10	4	10210	
10	1,5	22	9,7	30	32	72	10	4	10215	
10	2,0	22	9,7	30	32	72	10	4	10220	
12	1,5	25	11,6	60	64	108	12	4		12415
12	0,3	25	11,6	60	64	108	12	4		12403
12	0,5	25	11,6	60	64	108	12	4		12405
12	1,0	25	11,6	60	64	108	12	4		12410
12	2,0	25	11,6	60	64	108	12	4		12420
12	3,0	25	11,6	60	64	108	12	4		12430
12	0,3	26	11,6	36	38	83	12	4	12203	
12	0,1	26	11,6	36	38	83	12	4	12201	
12	0,5	26	11,6	36	38	83	12	4	12205	
12	1,0	26	11,6	36	38	83	12	4	12210	
12	1,5	26	11,6	36	38	83	12	4	12215	
12	2,0	26	11,6	36	38	83	12	4	12220	
12	3,0	26	11,6	36	38	83	12	4	12230	
16	1,5	33	15,5	80	84	132	16	4		16415
16	0,3	33	15,5	80	84	132	16	4		16403
16	0,5	33	15,5	80	84	132	16	4		16405
16	1,0	33	15,5	80	84	132	16	4		16410
16	2,0	33	15,5	80	84	132	16	4		16420
16	3,0	33	15,5	80	84	132	16	4		16430
16	4,0	33	15,5	80	84	132	16	4		16440
16	0,3	36	15,5	42	44	92	16	4	16203	
16	0,1	36	15,5	42	44	92	16	4	16201	
16	0,5	36	15,5	42	44	92	16	4	16205	
16	1,0	36	15,5	42	44	92	16	4	16210	
16	1,5	36	15,5	42	44	92	16	4	16215	
16	2,0	36	15,5	42	44	92	16	4	16220	

P	●	●
M	●	○
K	●	●
N	○	
S	○	
H		
O		

→ v_c/f_z Page 462–467

14

Continued on next page

End milling cutter with corner radius

N | λ_s = 35° 38° | γ_s = 9° | HPC



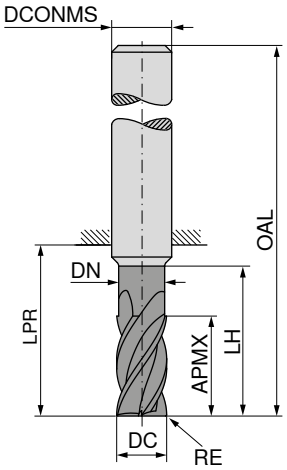

NEW Ti1000

NEW Ti1000

≈DIN 6527

≈DIN 6527

DC h10 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 072 ...	54 072 ...
16	3,0	36	15,5	42	44	92	16	4	16230	
16	4,0	36	15,5	42	44	92	16	4	16240	
20	0,1	41	19,5	52	54	104	20	4	20201	
20	0,3	41	19,5	52	54	104	20	4	20203	
20	0,5	41	19,5	52	54	104	20	4	20205	
20	1,0	41	19,5	52	54	104	20	4	20210	
20	1,5	41	19,5	52	54	104	20	4	20215	
20	2,0	41	19,5	52	54	104	20	4	20220	
20	3,0	41	19,5	52	54	104	20	4	20230	
20	4,0	41	19,5	52	54	104	20	4	20240	
20	1,5	42	19,5	100	104	154	20	4		20415
20	0,3	42	19,5	100	104	154	20	4		20403
20	0,5	42	19,5	100	104	154	20	4		20405
20	1,0	42	19,5	100	104	154	20	4		20410
20	2,0	42	19,5	100	104	154	20	4		20420
20	3,0	42	19,5	100	104	154	20	4		20430
20	4,0	42	19,5	100	104	154	20	4		20440
P									●	●
M									●	○
K									●	●
N									○	
S									○	
H										
O										

→ v_c/f_z Page 462–467

Finish milling cutter

N | λ_s=48° 50° γ_s=13° | HPC

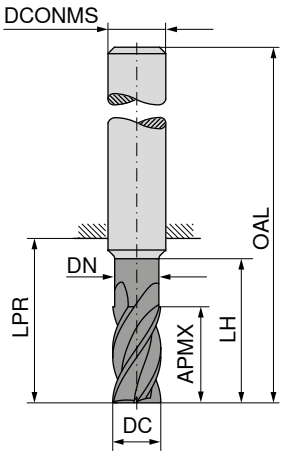

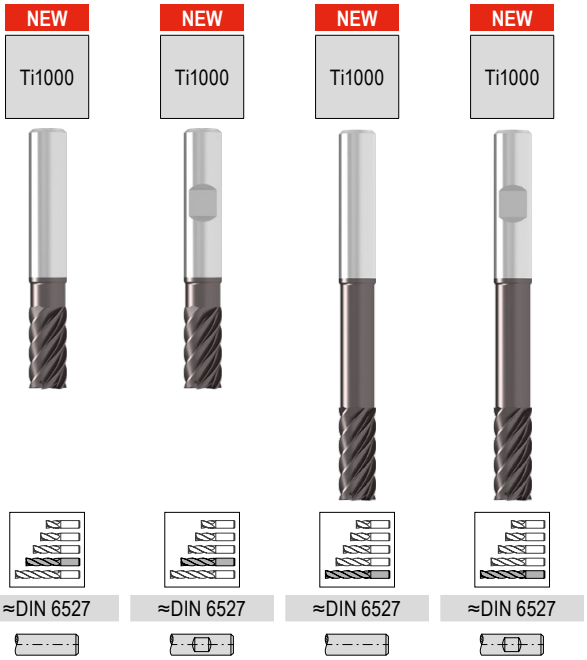

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC $_{h10}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	54 076 ...	54 075 ...	54 076 ...	54 075 ...
6	13	5,6	19	21	57	6	6	**06200**	**06200**		
6	15	5,6	42	44	80	6	6			**06400**	**06400**
8	19	7,6	25	27	63	8	6	**08200**	**08200**		
8	20	7,6	62	64	100	8	6			**08400**	**08400**
10	22	9,6	30	32	72	10	6	**10200**	**10200**		
10	25	9,6	58	60	100	10	6			**10400**	**10400**
12	26	11,5	36	38	83	12	6	**12200**	**12200**		
12	30	11,5	73	75	120	12	6			**12400**	**12400**
16	32	15,0	42	44	92	16	6	**16200**	**16200**		
16	40	15,0	100	102	150	16	6			**16400**	**16400**
20	38	19,0	52	54	104	20	6	**20200**	**20200**		
20	50	19,0	98	100	150	20	6			**20400**	**20400**
P								●	●	●	●
M								●	●	●	●
K								○	○	○	○
N								○	○	○	○
S								○	○	○	○
H											
O											

→ v_c/f_z Page 468

Finish milling cutter





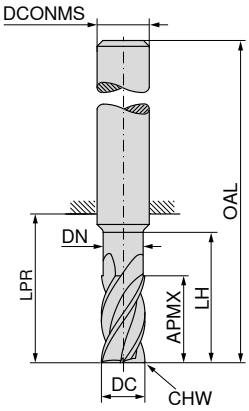

LPR with Shank DIN 6535 HB



Factory standard | Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 010 ...		52 011 ...		52 015 ...		52 016 ...		52 018 ...		52 019 ...	
5	8	4,8	13	18	54	6	0,02	6	**05000**		**05000**									
5	13	4,8	18	22	58	6	0,02	6					**05000**		**05000**					
6	10	5,8	15	18	54	6	0,03	6	**06000**		**06000**									
6	16	5,8	20	22	58	6	0,03	6					**06000**		**06000**					
6	21			29	65	6	0,03	6									**06000**		**06000**	
7	12	6,8	17	23	59	8	0,04	6	**07000**		**07000**									
7	22	6,8	30	34	70	8	0,04	6					**07000**		**07000**					
7	25			39	75	8	0,04	6									**07000**		**07000**	
8	12	7,8	17	23	59	8	0,04	6	**08000**		**08000**									
8	22	7,8	32	34	70	8	0,04	6					**08000**		**08000**					
8	28			39	75	8	0,04	6									**08000**		**08000**	
9	14	8,8	19	20	60	10	0,04	6	**09000**		**09000**									
9	25	8,8	33	33	73	10	0,04	6					**09000**		**09000**					
9	30			45	85	10	0,04	6									**09000**		**09000**	
10	14	9,8	19	20	60	10	0,05	6	**10000**		**10000**									
10	25	9,8	33	33	73	10	0,05	6					**10000**		**10000**					
10	35			45	85	10	0,05	6									**10000**		**10000**	
12	16	11,8	21	25	70	12	0,05	6	**12000**		**12000**									
12	28	11,8	38	39	84	12	0,05	6					**12000**		**12000**					
12	45			55	100	12	0,05	6									**12000**		**12000**	
14	18	13,8	23	25	70	14	0,06	6	**14000**		**14000**									
14	30	13,8	38	39	84	14	0,06	6					**14000**		**14000**					
16	20	15,8	28	32	80	16	0,06	8	**16000**		**16000**									
16	35	15,8	43	45	93	16	0,06	8					**16000**		**16000**					
16	50			62	110	16	0,06	8									**16000**		**16000**	
16	65			77	125	16	0,06	8									**16100**		**16100**	
20	25	19,8	33	35	85	20	0,07	8	**20000**		**20000**									
20	40	19,8	45	50	100	20	0,07	8					**20000**		**20000**					
20	55			65	115	20	0,07	8									**20000**		**20000**	
20	70			80	130	20	0,07	8									**20100**		**20100**	
25	55	24,8	63	69	125	25	0,08	8					**25000**		**25000**					
25	75			94	150	25	0,08	8									**25000**		**25000**	

P									○		○		○		○		○		○	
M									●		●		●		●		●		●	
K									○		○		○		○		○		○	
N									●		●		●		●		●		●	
S									●		●		●		●		●		●	
H																				
O									●		●		●		●		●		●	

→ v_c/f_z Page 480–485

Finish milling cutter



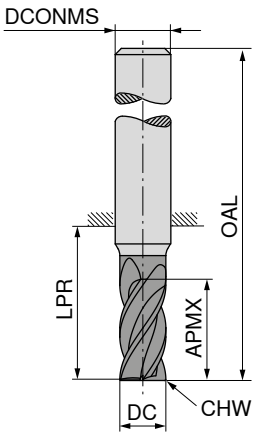

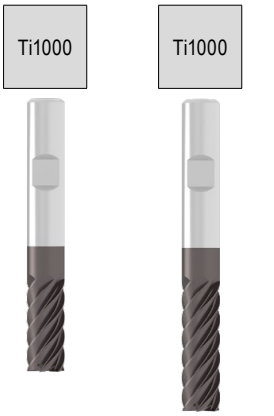

≈DIN 6527 | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 633 ...	50 633 ...
4	11	21	57	6	0,15	6	040	
4	16	26	62	6	0,15	6		041
5	13	21	57	6	0,15	6	050	
5	18	26	62	6	0,15	6		051
6	13	21	57	6	0,15	6	060	
6	18	26	62	6	0,15	6		061
7	16	27	63	8	0,15	6	070	
7	21	32	68	8	0,15	6		071
8	19	27	63	8	0,15	6	080	
8	24	32	68	8	0,15	6		081
9	19	32	72	10	0,15	6	090	
9	27	40	80	10	0,15	6		091
10	22	32	72	10	0,15	6	100	
10	30	40	80	10	0,15	6		101
12	26	38	83	12	0,15	6	120	
12	36	48	93	12	0,15	6		121
14	26	38	83	14	0,15	6	140	
14	42	54	99	14	0,15	6		141
16	32	44	92	16	0,15	6	160	
16	48	60	108	16	0,15	6		161
16	65	77	125	16	0,15	6		162
16	75	102	150	16	0,15	6		163
16	95	102	150	16	0,15	6		164
18	32	44	92	18	0,15	8	180	
18	54	66	114	18	0,15	8		181
20	38	54	104	20	0,15	8	200	
20	60	76	126	20	0,15	8		201
20	75	85	135	20	0,15	8		202
20	95	100	150	20	0,15	8		203
25	75	94	150	25	0,15	8		250
25	95	104	160	25	0,15	8		251
32	75	90	150	32	0,15	8	320	
32	95	100	160	32	0,15	8		321

P	○	○
M	●	●
K	●	●
N		
S	○	○
H		
O		

→ v_c/f_z Page 480–485

Finish milling cutter with corner radius



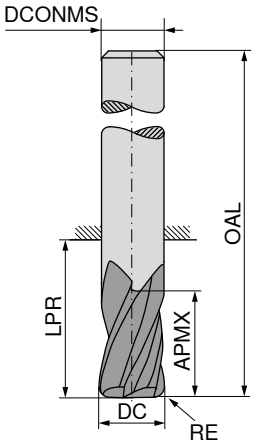

Ti1000

Factory standard

50 634 ...

DC f8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6	0,5	18	26	62	6	6	**060**
6	1,0	18	26	62	6	6	**061**
8	0,5	24	32	68	8	6	**080**
8	1,0	24	32	68	8	6	**081**
8	2,0	24	32	68	8	6	**082**
10	0,5	30	40	80	10	6	**100**
10	1,0	30	40	80	10	6	**101**
10	2,0	30	40	80	10	6	**102**
12	0,5	36	48	93	12	6	**120**
12	1,0	36	48	93	12	6	**121**
12	2,0	36	48	93	12	6	**122**
12	3,0	36	48	93	12	6	**123**
16	0,5	48	60	108	16	6	**160**
16	1,0	48	60	108	16	6	**161**
16	2,0	48	60	108	16	6	**162**
16	3,0	48	60	108	16	6	**163**
20	0,5	60	76	126	20	8	**200**
20	1,0	60	76	126	20	8	**201**
20	2,0	60	76	126	20	8	**202**
20	3,0	60	76	126	20	8	**203**

P	○
M	●
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 480–485

Finish milling cutter



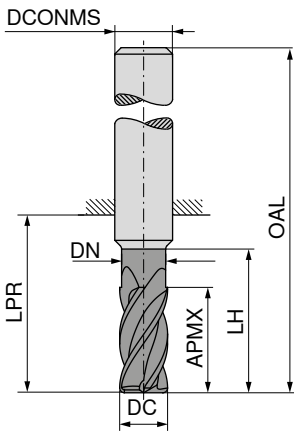

Factory standard

52 109 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	
6	16	5,8	26	26	58	6	8	**060**
8	22	7,8	32	32	64	8	10	**080**
10	25	9,8	35	35	73	10	12	**100**
12	28	11,8	38	39	84	12	12	**120**
16	35	15,8	43	45	93	16	16	**160**
20	40	19,8	50	54	104	20	16	**200**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–483

End milling cutter

▲ With graduated flute depth

H | λ_s = 52° γ_s = –11° | ≤ 54 HRC



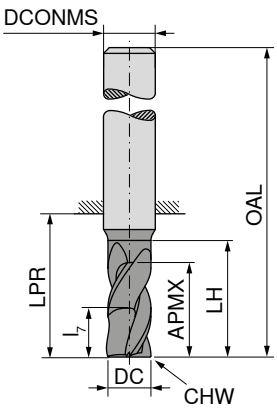

DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	APMX mm	LH mm	l_7 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	50 907 ...	50 907 ...	50 907 ...
4	8	15	4,4	18	54	6	0,15	4	**040**		
4	11	18	4,4	21	57	6	0,15	4		**041**	
4	16	19	6,4	26	62	6	0,15	4			**042**
5	9	16	4,8	18	54	6	0,15	4	**050**		
5	13	19	4,8	21	57	6	0,15	4		**051**	
5	17	20	6,8	26	62	6	0,15	4			**052**
6	10	17	5,2	18	54	6	0,15	4	**060**		
6	13	19	5,2	21	57	6	0,15	4		**061**	
6	18	21	7,2	26	62	6	0,15	4			**062**
8	12	20	7,6	22	58	8	0,15	4	**080**		
8	19	25	7,6	27	63	8	0,15	4		**081**	
8	24	27	9,6	32	68	8	0,15	4			**082**
10	14	24	8,8	26	66	10	0,15	4	**100**		
10	22	30	8,8	32	72	10	0,15	4		**101**	
10	30	33	12,0	40	80	10	0,15	4			**102**
12	16	26	10,4	28	73	12	0,15	4	**120**		
12	26	36	10,4	38	83	12	0,15	4		**121**	
12	36	39	14,4	48	93	12	0,15	4			**122**
16	22	32	12,8	34	82	16	0,15	4	**160**		
16	32	42	12,8	44	92	16	0,15	4		**161**	
16	48	51	19,2	60	108	16	0,15	4			**162**
20	26	42	15,2	42	92	20	0,15	4	**200**		
20	38	52	15,2	54	104	20	0,15	4		**201**	
20	60	63	24,0	76	126	20	0,15	4			**202**
P									●	●	●
M											
K											
N											
S											
H									●	●	●
O											

→ v_c/f_z Page 480–485

End milling cutter with corner radius

▲ With graduated flute depth

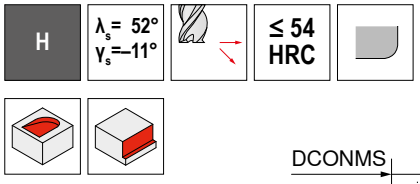

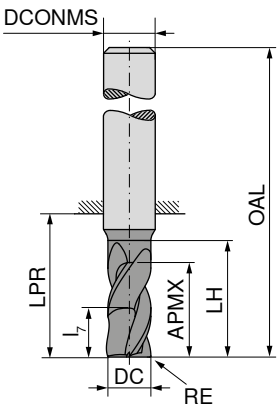

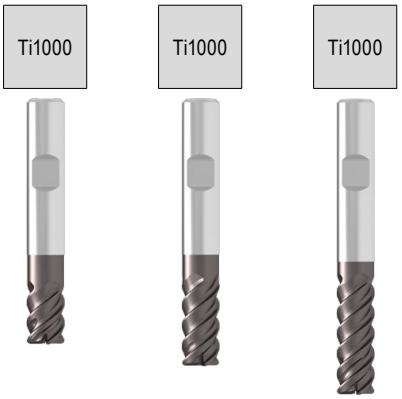



Factory standard | Factory standard | Factory standard



DC f8 mm	RE ±0,05 mm	APMX mm	LH mm	l_7 mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 908 ...	50 908 ...	50 908 ...
4	0,5	8	15	4,4	18	54	6	4	**040**		
4	0,5	11	18	4,4	21	57	6	4		**041**	
4	0,5	16	19	6,4	26	62	6	4			**042**
5	0,5	9	16	4,8	18	54	6	4	**050**		
5	0,5	13	19	4,8	21	57	6	4		**051**	
5	0,5	17	20	6,8	26	62	6	4			**052**
6	0,5	10	17	5,2	18	54	6	4	**060**		
6	0,5	13	19	5,2	21	57	6	4		**061**	
6	0,5	18	21	7,2	26	62	6	4			**062**
8	1,0	12	20	7,6	22	58	8	4	**080**		
8	1,0	19	25	7,6	27	63	8	4		**081**	
8	1,0	24	27	9,6	32	68	8	4			**082**
10	1,0	14	24	8,8	26	66	10	4	**100**		
10	1,0	22	30	8,8	32	72	10	4		**101**	
10	1,0	30	33	12,0	40	80	10	4			**102**
12	1,5	16	26	10,4	28	73	12	4	**120**		
12	1,5	26	36	10,4	38	83	12	4		**121**	
12	1,5	36	39	14,4	48	93	12	4			**122**
14	1,5	18	28	10,4	30	75	14	4	**140**		
16	2,0	22	32	12,8	34	82	16	4	**160**		
16	2,0	32	42	12,8	44	92	16	4		**161**	
16	2,0	48	51	19,2	60	108	16	4			**162**
18	2,0	24	34	12,8	36	84	18	4	**180**		
20	2,0	26	40	15,2	42	92	20	4	**200**		
20	2,0	38	52	15,2	54	104	20	4		**201**	
20	2,0	60	63	24,0	76	126	20	4			**202**
P									●	●	●
M											
K											
N											
S											
H									●	●	●
O											

→ v_c/f_z Page 480–485

Finish milling cutter

H | λ_s=50° γ_s=–5° | ≤ 68 HRC

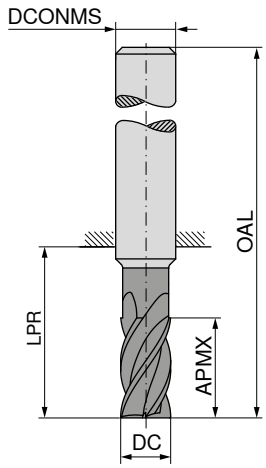



DIN 6527

50 635 ...

Factory standard

50 635 ...

DC f8 mm	APMX mm	OAL mm	DCONMS h5 mm	ZEFP		
4	11	57	6	6	040	
4	16	62	6	6		041
5	13	57	6	6	050	
5	18	62	6	6		051
6	13	57	6	6	060	
6	18	62	6	6		061
8	19	63	8	6	080	
8	24	68	8	6		081
10	22	72	10	6	100	
10	30	80	10	6		101
12	26	83	12	6	120	
12	36	93	12	6		121
16	32	92	16	8	160	
16	48	108	16	8		161
16	90	150	16	8		162
20	38	104	20	8	200	
20	60	126	20	8		201
20	75	135	20	8		202
20	95	150	20	8		203
25	75	150	25	8	250	
25	95	160	25	8		251

P	●	●
M	●	●
K	○	○
N	○	○
S	●	●
H	●	●
O	●	●

→ v_c/f_z Page 480–485

Finish milling cutter

H | λ_s=45° γ_s=16° | ≤ 50 HRC

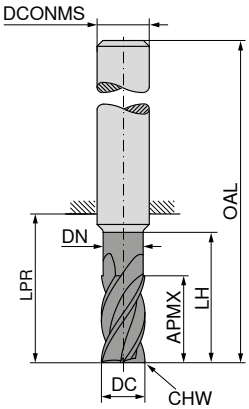

LPR with Shank DIN 6535 HB

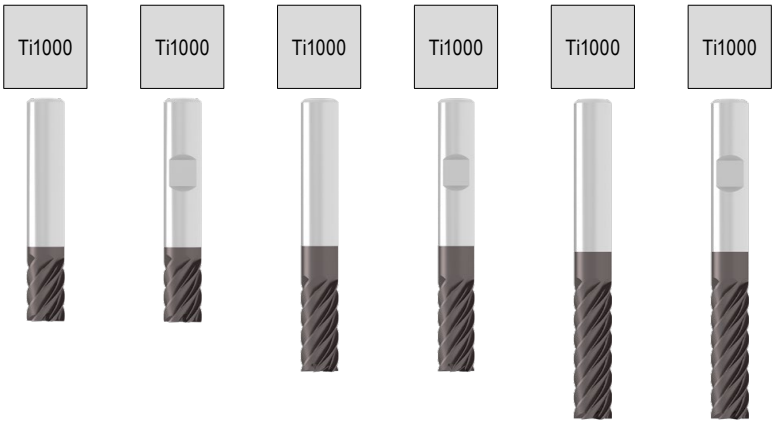

	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard
	52 112 ...	52 112 ...	52 122 ...	52 122 ...	52 123 ...	52 123 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP										
5	8	4,8	13	18	54	6	0,02	6	**051**		**050**							
5	13	4,8	18	22	58	6	0,02	6					**051**		**050**			
6	10	5,8	15	18	54	6	0,03	6	**061**		**060**							
6	16	5,8	20	22	58	6	0,03	6					**061**		**060**			
6	21			29	65	6	0,03	6									**061**	**060**
8	12	7,8	17	23	59	8	0,04	6	**081**		**080**							
8	22	7,8	32	34	70	8	0,04	6					**081**		**080**			
8	28			39	75	8	0,04	6									**081**	**080**
10	14	9,8	19	20	60	10	0,05	6	**101**		**100**							
10	25	9,8	33	33	73	10	0,05	6					**101**		**100**			
10	35			45	85	10	0,05	6									**101**	**100**
12	16	11,8	21	25	70	12	0,05	6	**121**		**120**							
12	28	11,8	38	39	84	12	0,05	6					**121**		**120**			
12	45			55	100	12	0,05	6									**121**	**120**
16	20	15,8	28	32	80	16	0,06	6	**161**		**160**							
16	35	15,8	43	45	93	16	0,06	6					**161**		**160**			
16	50			62	110	16	0,06	6									**162**	**160**
16	65			77	125	16	0,06	6									**163**	**161**
20	25	19,8	33	35	85	20	0,07	8	**201**		**200**							
20	40	19,8	45	50	100	20	0,07	8					**201**		**200**			
20	55			65	115	20	0,07	8									**202**	**200**
20	70			80	130	20	0,07	8									**203**	**201**
25	55	24,8	63	69	125	25	0,08	8					**251**		**250**			
25	75			94	150	25	0,08	8									**251**	**250**

P	○	○	○	○	○	○
M	●	●	●	●	●	●
K	○	○	○	○	○	○
N	●	●	●	●	●	●
S	●	●	●	●	●	●
H						
O	●	●	●	●	●	●

14

→ v_c/f_z Page 480–485

Roughing-Finishing Cutter

▲ With rough-finishing profile



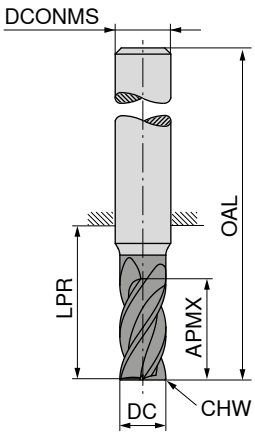



DIN 6527

50 628 ...

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	
5	15	21	57	6	0,25	4	**050**
6	16	21	57	6	0,25	4	**060**
8	22	27	63	8	0,25	4	**080**
10	25	32	72	10	0,25	4	**100**
12	28	38	83	12	0,25	4	**120**
16	35	44	92	16	0,25	4	**160**
20	40	54	104	20	0,25	4	**200**

P	
M	
K	
N	●
S	○
H	
O	●

→ v_c/f_z Page 480–483

Roughing-Finishing Cutter

▲ With trapezoidal cord profile



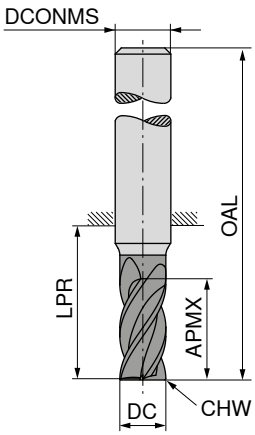

NEW

APA72S

DIN 6527

52 318 ...

DC h10 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
6	13	21	57	6		3	**06000**
8	19	27	63	8	0,08	3	**08000**
10	22	32	72	10	0,12	4	**10000**
12	26	38	83	12	0,15	4	**12000**
14	26	38	83	14	0,17	4	**14000**
16	32	44	92	16	0,20	4	**16000**
18	32	48	92	18	0,22	4	**18000**
20	38	54	104	20	0,25	4	**20000**

P	●
M	○
K	●
N	○
S	
H	
O	

→ v_c/f_z Page 470+471

Rough milling cutter with corner radius

▲ With roughing profile

WR | λ_s=45° γ_s= 9° | HPC



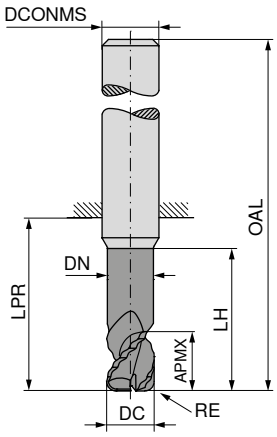

Factory standard | Factory standard

DC h6 mm	RE +/-0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 625 ...	54 627 ...
3		4,5	2,8	15	22	58	6	3	030	030
3		8,0	2,8	15	22	58	6	3	031	031
4		5,5	3,8	20	26	62	6	3	040	040
4		10,5	3,8	20	26	62	6	3	041	041
5		7,0	4,8	25	34	70	6	3	050	050
5		13,0	4,8	25	34	70	6	3	051	051
6	1	8,5	5,8	30	34	70	6	3	061	061
6	1	16,0	5,8	30	34	70	6	3	062	062
7	1	11,0	6,7	40	44	80	8	3	071	071
7	1	21,0	6,7	40	44	80	8	3	072	072
8	1	11,0	7,7	40	44	80	8	3	081	081
8	1	21,0	7,7	40	44	80	8	3	082	082
9	1	14,0	8,7	50	54	94	10	3	091	091
9	1	26,0	8,7	50	54	94	10	3	092	092
10	2	14,0	9,7	50	54	94	10	3	101	101
10	2	26,0	9,7	50	54	94	10	3	102	102
11	2	16,0	10,6	60	64	109	12	3	111	111
11	2	31,0	10,6	60	64	109	12	3	112	112
12	2	16,0	11,6	60	64	109	12	3	121	121
12	2	31,0	11,6	60	64	109	12	3	122	122
14	2	19,0	13,6	70	74	119	14	3	141	141
14	2	36,0	13,6	70	74	119	14	3	142	142
16	2	22,0	15,5	80	84	132	16	3	161	161
16	2	41,0	15,5	80	84	132	16	3	162	162
18	2	25,0	17,5	90	94	142	18	3	181	181
18	2	47,0	17,5	90	94	142	18	3	182	182
20	2	27,0	19,5	100	104	154	20	3	201	201
20	2	52,0	19,5	100	104	154	20	3	202	202

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 460+461

Rough milling cutter

▲ With roughing profile

NR | λ_s=35° 38° γ_s=10° | HPC



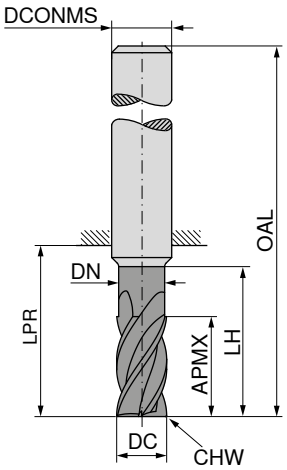

NEW

Ti1000

≈DIN 6527

54 077 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
4	11	3,8	17	21	57	6	0,1	4	**00400**
5	13	4,8	19	21	57	6	0,1	4	**00500**
6	13	5,8	19	21	57	6	0,1	4	**00600**
8	21	7,7	25	27	63	8	0,2	4	**00800**
10	22	9,7	30	32	72	10	0,2	4	**01000**
12	26	11,6	36	38	83	12	0,3	4	**01200**
16	36	15,5	42	44	92	16	0,3	4	**01600**
20	41	19,5	52	54	104	20	0,3	4	**02000**

P	●
M	●
K	●
N	○
S	○
H	
O	

→ v_c/f_z Page 472+473

Rough milling cutter

▲ With roughing profile



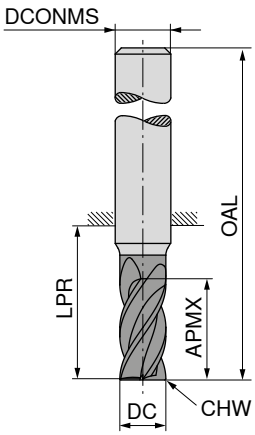

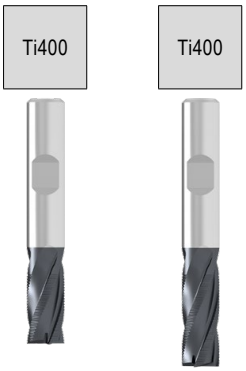



DIN 6527 | DIN 6527

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	50 618 ...	50 624 ...
4	8	21	57	6	0,6	4		040
5	8	18	54	6	0,6	4	050	
5	13	21	57	6	0,6	4		050
6	8	18	54	6	0,6	4	060	
6	13	21	57	6	0,6	4		060
7	11	22	58	8	0,6	4	070	
7	19	27	63	8	0,6	4		070
8	11	22	58	8	0,6	4	080	
8	19	27	63	8	0,6	4		080
9	13	26	66	10	0,6	4	090	
9	22	32	72	10	0,6	4		090
10	13	26	66	10	0,6	4	100	
10	22	32	72	10	0,6	4		100
11	26	38	83	12	0,6	4		110
12	16	28	73	12	0,6	4	120	
12	26	38	83	12	0,6	4		120
13	26	38	83	14	0,6	4		130
14	16	31	76	14	0,6	4	140	
14	26	38	83	14	0,6	4		140
16	19	34	82	16	0,6	4	160	
16	32	44	92	16	0,6	4		160
18	19	36	84	18	0,6	4	180	
18	32	44	92	18	0,6	4		180
20	19	42	92	20	0,6	4	200	
20	38	54	104	20	0,6	4		200
25	45	65	121	25	0,6	5		250

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 480–483

Rough milling cutter

▲ With roughing profile

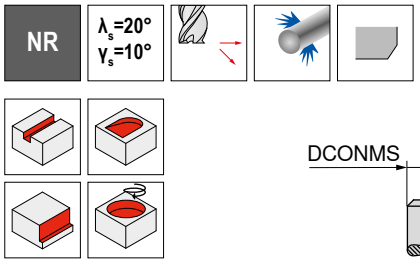

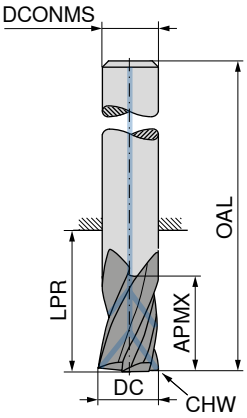

Ti400

DIN 6527

50 625 ...

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	
6	13	21	57	6	0,6	4	**060**
8	19	27	63	8	0,6	4	**080**
10	22	32	72	10	0,6	4	**100**
12	26	38	83	12	0,6	4	**120**
16	32	44	92	16	0,6	4	**160**
20	38	54	104	20	0,6	4	**200**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 480–483

Rough milling cutter

▲ With roughing profile



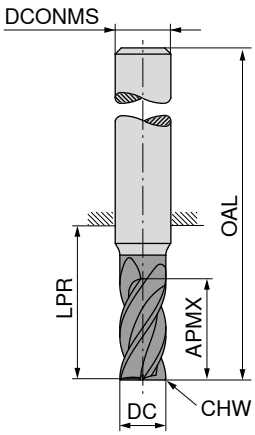

Ti400

DIN 6527

50 637 ...

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	
6	13	21	57	6	0,5	4	**060**
8	19	27	63	8	0,5	4	**080**
10	22	32	72	10	0,5	4	**100**
12	26	38	83	12	0,5	4	**120**
14	26	38	83	14	0,5	4	**140**
16	32	44	92	16	0,5	5	**160**
18	32	44	92	18	0,5	5	**180**
20	38	54	104	20	0,5	6	**200**
25	45	65	121	25	0,5	6	**250**

P	○
M	●
K	○
N	○
S	●
H	
O	○

→ v_c/f_z Page 480–483

Rough milling cutter

▲ With round cord profile
▲ With integrated chip breakers in the flutes



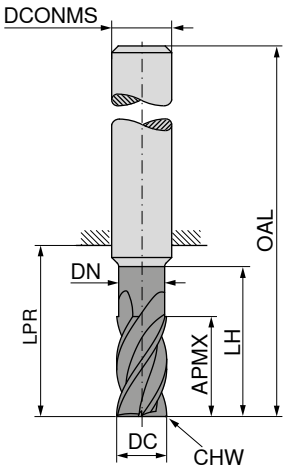

	Factory standard	Factory standard
	52 340 ...	**52 341 ...**

DC h11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP		
6	16	5,8	21	22	58	6	0,15	4	**060**	**060**
8	22	7,7	27	34	70	8	0,20	4	**080**	**080**
10	25	9,7	30	33	73	10	0,20	4	**100**	**100**
12	28	11,6	38	39	84	12	0,25	4	**120**	**120**
14	30	13,6	40	39	84	14	0,30	4	**140**	**140**
16	35	15,5	45	45	93	16	0,35	5	**160**	**160**
18	35	17,5	45	45	93	18	0,40	5	**180**	**180**
20	40	19,5	55	54	104	20	0,40	5	**200**	**200**
P									○	○
M									●	●
K									○	○
N										
S										
H										
O										

→ v_c/f_z Page 474+475

14

Rough milling cutter

▲ With round cord profile
▲ With integrated chip breakers in the flutes





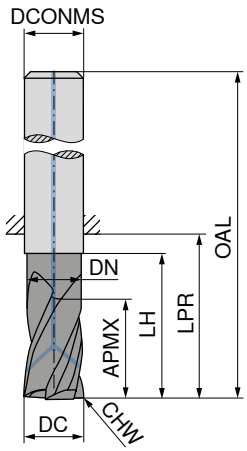



Factory standard | Factory standard

DC h11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 338 ...	52 339 ...
6	16	5,8	21	22	58	6	0,15	4	**060**	**060**
8	22	7,7	27	34	70	8	0,20	4	**080**	**080**
10	25	9,7	30	33	73	10	0,20	4	**100**	**100**
12	28	11,6	38	39	84	12	0,25	4	**120**	**120**
16	35	15,5	45	45	93	16	0,35	5	**160**	**160**
20	40	19,5	55	54	104	20	0,40	5	**200**	**200**
P									●	●
M									●	●
K									●	●
N										
S										
H										
O										

→ v_c/f_z Page 474+475

Rough milling cutter

▲ With round cord profile
▲ With integrated chip breakers in the flutes



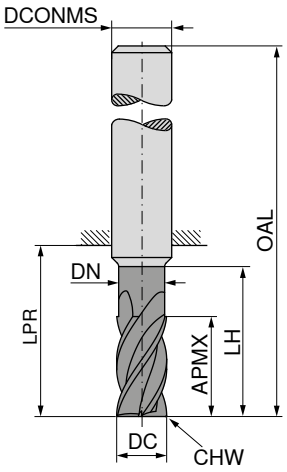

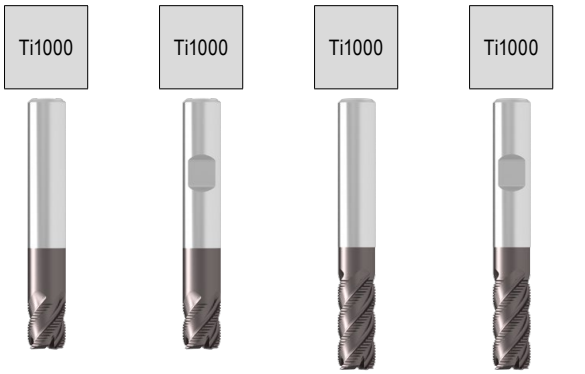

DC h11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	52 342 ...	52 343 ...	52 342 ...	52 343 ...
mm	mm	mm	mm	mm	mm	mm	mm					
6	8	6,0		18	54	6	0,15	4	060	060		
6	16	5,8	21	22	58	6	0,15	4			061	061
8	11	8,0		23	59	8	0,20	4	080	080		
8	22	7,7	27	34	70	8	0,20	4			081	081
10	13	10,0		27	67	10	0,20	4	100	100		
10	25	9,7	30	33	73	10	0,20	4			101	101
12	16	12,0		29	74	12	0,25	4	120	120		
12	28	11,6	38	39	84	12	0,25	4			121	121
14	16	14,0		30	75	14	0,25	4	140	140		
14	30	13,5	40	39	84	14	0,25	4			141	141
16	19	16,0		36	84	16	0,35	5	160	160		
16	35	15,5	45	45	93	16	0,35	5			161	161
20	19	20,0		43	93	20	0,40	5	200	200		
20	40	19,5	55	54	104	20	0,40	5			201	201
25	50	24,0	65	69	125	25	0,50	5			251	251
P									●	●	●	●
M									○	○	○	○
K									●	●	●	●
N												
S												
H												
O												

→ v_c/f_z Page 474+475

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm
▲ For Ø DC ≤ 5.0 mm, angle tolerance α and β: ± 0.5°



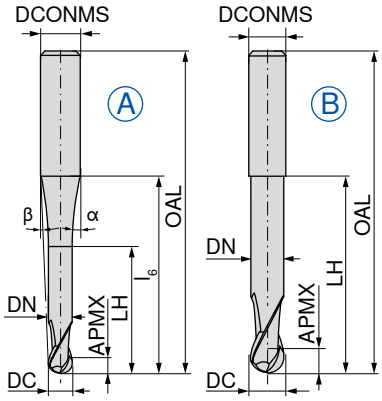

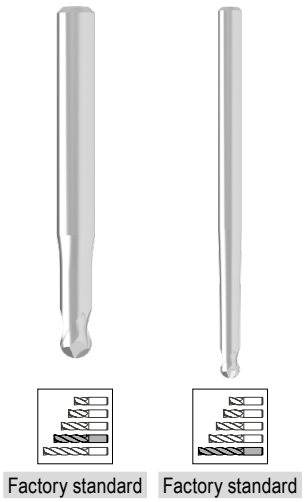

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 718 ...	52 720 ...
0,5	1,0	0,45	2,0	9	38	10	8	3	2	A	**005**	
1,0	2,0	0,95	4,0	9	38	12,5	6,5	3	2	A	**010**	
1,5	2,5	1,40	7,5	9	38	32	5	3	2	A	**015**	
2,0	3,0	1,80	8,0	9	38	31	3,5	3	2	A	**020**	
3,0	3,5	2,80	10,0	20	57	11,5	5	6	2	A	**030**	
3,0	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A		**030**
4,0	4,0	3,80	12,0	20	57	11	3,5	6	2	A	**040**	
4,0	4,0	3,80	20,0	40	80	4	1,5	6	2	A		**040**
5,0	5,0	4,70	10,0	40	100	1,5	1	6	2	A		**050**
5,0	5,0	4,70	14,0	20	57	10	2	6	2	A	**050**	
6,0	6,0	5,60	20,0		57			6	2	B	**060**	
6,0	6,0	5,60	40,0		100			6	2	B		**060**
8,0	7,0	7,60	25,0		63			8	2	B	**080**	
8,0	7,0	7,60	60,0		120			8	2	B		**080**
10,0	8,0	9,60	30,0		72			10	2	B	**100**	
10,0	8,0	9,60	60,0		120			10	2	B		**100**
12,0	8,0	11,50	40,0		83			12	2	B	**120**	
12,0	10,0	11,50	70,0		160			12	2	B		**120**

P		
M		
K		
N	●	●
S	○	○
H		
O	●	●

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

W | λ_s=45° γ_s=18°



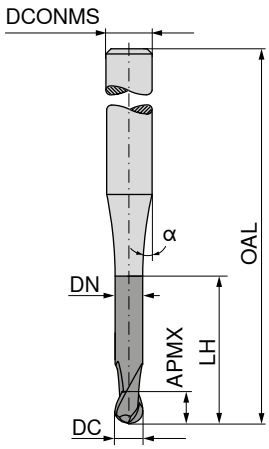

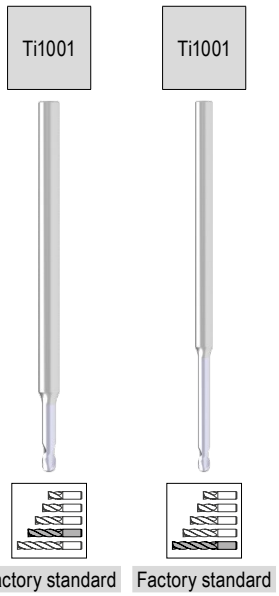

DC f8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 903 ...	50 903 ...
0,2	0,2	0,18	0,6	55	15	3	2	**021**	
0,2	0,2	0,18	1,0	55	15	3	2	**022**	
0,2	0,2	0,18	1,6	55	15	3	2	**023**	
0,2	0,2	0,18	2,0	55	15	3	2	**024**	
0,3	0,3	0,28	0,9	55	15	3	2	**031**	
0,3	0,3	0,28	1,5	55	15	3	2	**032**	
0,3	0,3	0,28	2,4	55	15	3	2	**033**	
0,3	0,3	0,28	3,0	55	15	3	2	**034**	
0,4	0,4	0,37	1,2	55	15	3	2	**041**	
0,4	0,4	0,37	2,0	55	15	3	2	**042**	
0,4	0,4	0,37	3,2	55	15	3	2	**043**	
0,4	0,4	0,37	4,0	55	15	3	2	**044**	
0,5	0,5	0,45	1,5	55	15	3	2	**051**	
0,5	0,5	0,45	2,5	55	15	3	2	**052**	
0,5	0,5	0,45	4,0	55	15	3	2	**053**	
0,5	0,5	0,45	5,0	55	15	3	2	**054**	
0,6	0,6	0,58	2,0	55	15	3	2	**061**	
0,6	0,6	0,58	3,0	55	15	3	2	**062**	
0,6	0,6	0,58	5,0	65	15	3	2		**063**
0,6	0,6	0,58	6,0	65	15	3	2		**064**
0,8	0,8	0,77	2,5	55	15	3	2	**081**	
0,8	0,8	0,77	4,0	55	15	3	2	**082**	
0,8	0,8	0,77	6,5	65	15	3	2		**083**
0,8	0,8	0,77	8,0	65	15	3	2		**084**
1,0	1,0	0,95	3,0	55	15	3	2	**101**	
1,0	1,0	0,95	5,0	55	15	3	2	**102**	
1,0	1,0	0,95	8,0	65	15	3	2		**103**
1,0	1,0	0,95	10,0	65	15	3	2		**104**
1,0	1,0	0,95	12,0	65	15	3	2		**105**
1,2	1,2	1,15	3,0	55	15	3	2	**121**	
1,2	1,2	1,15	6,0	55	15	3	2	**122**	
1,2	1,2	1,15	10,0	65	15	3	2		**123**
1,2	1,2	1,15	12,0	65	15	3	2		**124**
1,3	1,3	1,25	4,0	55	15	3	2	**131**	
1,3	1,3	1,25	7,0	55	15	3	2	**132**	
1,3	1,3	1,25	11,0	65	15	3	2		**133**
1,3	1,3	1,25	13,0	65	15	3	2		**134**
1,5	1,5	1,44	5,0	55	15	3	2	**151**	
1,5	1,5	1,44	7,5	55	15	3	2	**152**	

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

14

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

W | λ_s=45° γ_s=18°



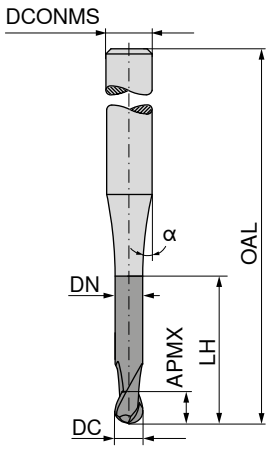

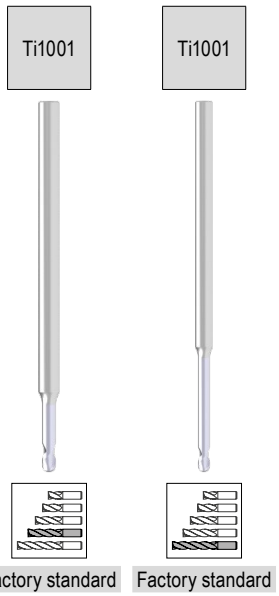

DC f8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 903 ...	50 903 ...
1,5	1,5	1,44	12,0	65	15	3	2		154
1,5	1,5	1,44	15,0	65	15	3	2		153
1,6	1,6	1,52	5,0	55	15	3	2	161	
1,6	1,6	1,52	8,0	55	15	3	2	162	
1,6	1,6	1,52	13,0	65	15	3	2		163
1,6	1,6	1,52	16,0	65	15	3	2		164
1,8	1,8	1,72	5,5	55	15	3	2	181	
1,8	1,8	1,72	9,0	55	15	3	2	182	
1,8	1,8	1,72	14,5	65	15	3	2		183
1,8	1,8	1,72	18,0	65	15	3	2		184
2,0	2,0	1,92	6,0	55	15	3	2	201	
2,0	2,0	1,92	10,0	55	15	3	2	202	
2,0	2,0	1,92	14,0	55	15	3	2	203	
2,0	2,0	1,92	16,0	65	15	3	2		204
2,0	2,0	1,92	20,0	65	15	3	2		205
2,3	2,3	2,22	7,0	55	15	3	2	231	
2,3	2,3	2,22	11,5	55	15	3	2	232	
2,3	2,3	2,22	18,5	65	15	3	2		233
2,3	2,3	2,22	20,0	65	15	3	2		234
2,3	2,3	2,22	23,0	65	15	3	2		235
3,0	3,0	2,90	9,0	65	15	6	2	301	
3,0	3,0	2,90	15,0	65	15	6	2	302	
3,0	3,0	2,90	24,0	100	15	6	2		303
3,0	3,0	2,90	30,0	100	15	6	2		304
4,0	4,0	3,90	12,0	65	15	6	2	401	
4,0	4,0	3,90	20,0	65	15	6	2	402	
4,0	4,0	3,90	32,0	100	15	6	2		403
4,0	4,0	3,90	40,0	100	15	6	2		404
5,0	5,0	4,90	15,0	65	15	6	2	501	
5,0	5,0	4,90	25,0	65	15	6	2	502	
5,0	5,0	4,90	40,0	100	15	6	2		503
5,0	5,0	4,90	50,0	100	15	6	2		504
6,0	6,0	5,90	18,0	65	15	6	2	601	
6,0	6,0	5,90	30,0	100	15	6	2		602
6,0	6,0	5,90	48,0	100	15	6	2		603
6,0	6,0	5,90	60,0	100	15	6	2		604

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

W | λ_s=55° γ_s= 7° | HPC

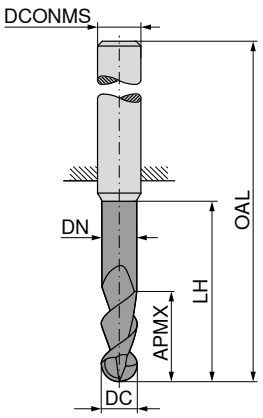

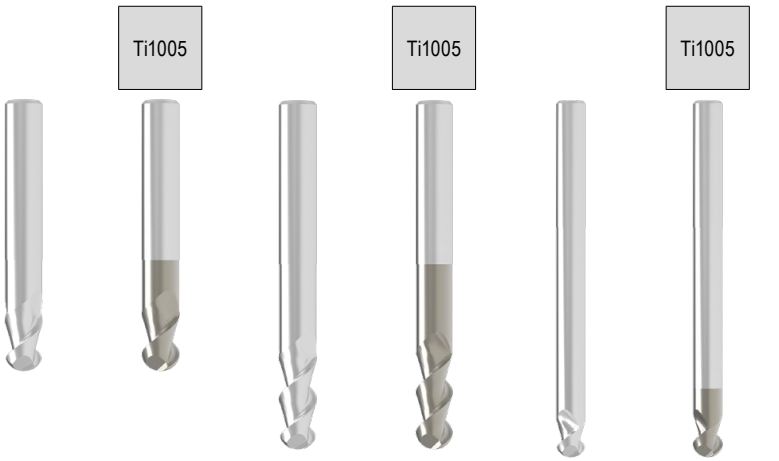



							Factory standard	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard
							54 640 ...	54 642 ...	54 640 ...	54 642 ...	54 640 ...	54 642 ...
DC h6	APMX	DN	LH	OAL	DCONMS h5	ZEFP						
mm	mm	mm	mm	mm	mm							
3	5,0	2,8	12	55	6	2	031	031				
3	3,5	2,8	15	58	6	2			034	034		
3	8,0	2,8	15	58	6	2			032	032		
3	3,5	2,8	24	67	6	2					035	035
4	6,5	3,8	12	55	6	2	041	041				
4	4,5	3,8	20	62	6	2			044	044		
4	10,5	3,8	20	62	6	2			042	042		
4	4,5	3,8	32	74	6	2					045	045
5	8,0	4,8	15	58	6	2	051	051				
5	5,5	4,8	25	70	6	2			054	054		
5	13,0	4,8	25	70	6	2			052	052		
5	5,5	4,8	40	88	6	2					055	055
6	10,0	5,8	18	58	6	2	061	061				
6	7,0	5,8	30	70	6	2			064	064		
6	16,0	5,8	30	70	6	2			062	062		
6	7,0	5,8	48	88	6	2					065	065
8	13,0	7,7	24	64	8	2	081	081				
8	9,0	7,7	40	80	8	2			084	084		
8	21,0	7,7	40	80	8	2			082	082		
8	9,0	7,7	64	104	8	2					085	085
10	16,0	9,7	30	74	10	2	101	101				
10	11,0	9,7	50	94	10	2			104	104		
10	26,0	9,7	50	94	10	2			102	102		
10	11,0	9,7	80	124	10	2					105	105
12	19,0	11,6	36	85	12	2	121	121				
12	13,0	11,6	60	109	12	2			124	124		
12	31,0	11,6	60	109	12	2			122	122		
12	13,0	11,6	96	145	12	2					125	125
14	22,0	13,6	42	91	14	2	141	141				
14	15,0	13,6	70	119	14	2			144	144		
14	36,0	13,6	70	119	14	2			142	142		
14	15,0	13,6	112	161	14	2					145	145
16	25,0	15,5	48	100	16	2	161	161				
16	17,0	15,5	80	132	16	2			164	164		
16	41,0	15,5	80	132	16	2			162	162		
16	17,0	15,5	128	180	16	2					165	165
18	29,0	17,5	54	106	18	2	181	181				
18	20,0	17,5	90	142	18	2			184	184		
18	47,0	17,5	90	142	18	2			182	182		
18	20,0	17,5	144	196	18	2					185	185
20	32,0	19,5	60	114	20	2	201	201				
20	52,0	19,5	100	154	20	2			202	202		
20	22,0	19,5	100	154	20	2			204	204		
20	22,0	19,5	160	214	20	2					205	205
P												
M												
K												
N							●	●	●	●	●	●
S												
H												
O												

→ v_c/f_z Page 460+461

14

Ball Nosed Cutter

W | λ_s=30° γ_s=12°

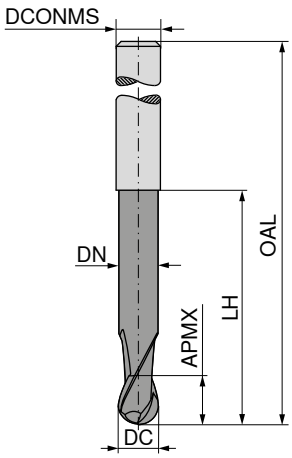

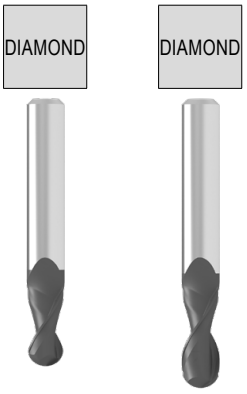



Factory standard | Factory standard

DC h10 mm	APMX mm	LH mm	DN mm	OAL mm	DCONMS h6 mm	ZEFP	52 766 ...	52 768 ...
0,5	1,5			38	3	2	**005**	
1,0	2,0			38	3	2	**010**	
2,0	3,0			38	3	2	**020**	
2,0	3,0			50	6	2	**021**	
2,0	8,0	31	1,8	60	2	2		**020**
3,0	5,0			38	3	2	**030**	
3,0	5,0			50	6	2	**031**	
3,0	12,0	41	2,8	70	3	2		**030**
4,0	8,0			54	6	2	**040**	
4,0	15,0	51	3,8	80	4	2		**040**
5,0	9,0			54	6	2	**050**	
5,0	20,0	71	4,8	100	5	2		**050**
6,0	10,0			54	6	2	**060**	
6,0	20,0	63	5,8	100	6	2		**060**
8,0	12,0			58	8	2	**080**	
8,0	20,0	83	7,8	120	8	2		**080**
10,0	14,0			66	10	2	**100**	
10,0	25,0	99	9,8	140	10	2		**100**
12,0	25,0	104	11,8	150	12	2		**120**

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Micro-ball nosed cutter

▲ Radius accuracy: ± 0,01 mm



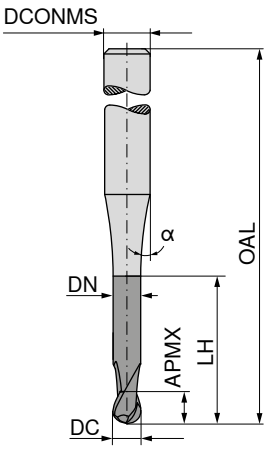

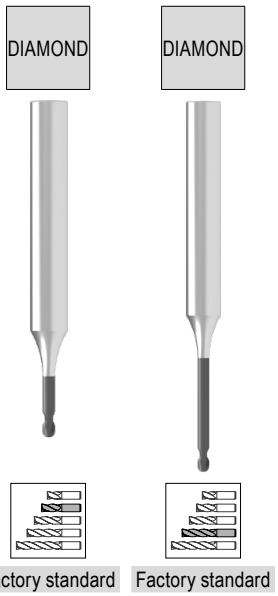

DC f8 mm	APMX mm	LH mm	DN mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 912 ...	50 912 ...
0,6	1,2	3,0	0,58	55	15	6	2	**906**	
0,6	1,2	6,0	0,58	65	15	6	2		**006**
0,8	1,2	4,0	0,77	55	15	6	2	**908**	
0,8	1,2	8,0	0,77	65	15	6	2		**008**
1,0	1,5	5,0	0,95	55	15	6	2	**910**	
1,0	1,5	12,0	0,95	65	15	6	2		**010**
1,2	1,6	6,0	1,15	55	15	6	2	**912**	
1,2	1,6	12,0	1,15	65	15	6	2		**012**
1,5	1,8	7,5	1,44	55	15	6	2	**915**	
1,5	1,8	15,0	1,44	65	15	6	2		**015**
2,0	2,0	10,0	1,92	55	15	6	2	**920**	
2,0	2,0	20,0	1,92	65	15	6	2		**020**
P									
M									
K									
N								●	●
S									
H									
O								●	●

→ v_c/f_z Page 418

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm



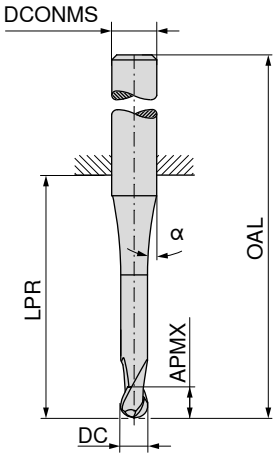

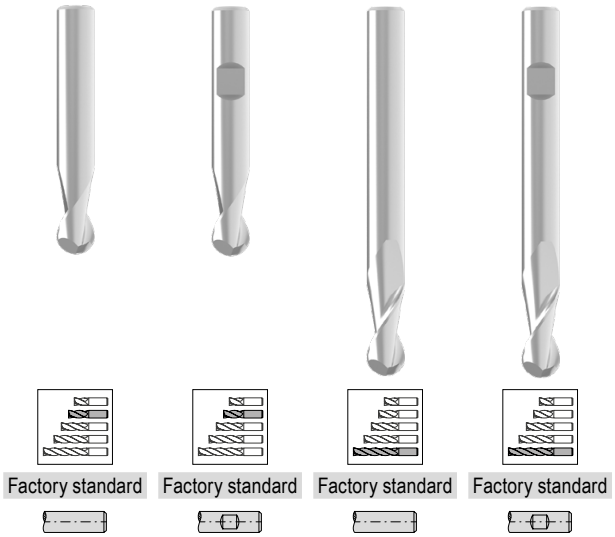

Factory standard	Factory standard	Factory standard	Factory standard
52 050 ...	52 052 ...	52 051 ...	52 053 ...

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP				
0,10	0,2	12,5	38	8	3	2	**91000**			
0,15	0,3	11,5	38	8	3	2	**91500**			
0,20	0,4	12,0	38	8	3	2	**92000**			
0,25	0,5	12,5	38	8	3	2	**92500**			
0,30	1,0	11,3	38	8	3	2	**93000**			
0,35	1,0	11,1	38	8	3	2	**93500**			
0,40	1,0	10,9	38	8	3	2	**94000**			
0,50	1,5	11,7	38	7	3	2	**95000**			
0,50	1,5	18,0	54	11	6	2	**95100**			
0,50	1,5	47,0	75	7	3	2			**95000**	
0,50	1,5	44,0	80	11	6	2			**95100**	
0,60	1,5	11,3	38	7	3	2	**96000**			
0,70	2,0	11,4	38	7	3	2	**97000**			
0,80	2,0	11,7	38	7	3	2	**98000**			
0,90	2,5	11,7	38	7	3	2	**99000**			
1,00	2,0	22,0	50	7	3	2	**31000**			
1,00	2,0	18,0	54	10	6	2	**01000**	**01000**		
1,00	3,0	47,0	75	7	3	2			**31000**	
1,00	3,0	44,0	80	10	6	2			**01000**	**01000**
1,10	3,0	22,0	50	6	3	2	**31100**			
1,20	3,0	22,0	50	5	3	2	**31200**			
1,40	3,0	22,0	50	5	3	2	**31400**			
1,50	3,0	22,0	50	6	3	2	**31500**			
1,50	3,0	18,0	54	10	6	2	**01500**	**01500**		
1,50	4,0	47,0	75	5	3	2			**31500**	
1,50	4,0	44,0	80	10	6	2			**01500**	**01500**
1,60	4,0	22,0	50	6	3	2	**31600**			
1,80	4,0	22,0	50	6	3	2	**31800**			
2,00	4,0	22,0	50	5	3	2	**32000**			
2,00	4,0	18,0	54	9	6	2	**02000**	**02000**		
2,00	6,0	47,0	75	5	3	2			**32000**	
2,00	6,0	44,0	80	10	6	2			**02000**	**02000**
2,50	5,0	22,0	50	3	3	2	**32500**			
2,50	5,0	18,0	54	9	6	2	**02500**	**02500**		
2,50	8,0	47,0	75	3	3	2			**32500**	
2,50	8,0	44,0	80	10	6	2			**02500**	**02500**
3,00	6,0	22,0	50		3	2	**33000**			
3,00	6,0	18,0	54	9	6	2	**03000**	**03000**		
3,00	10,0	47,0	75		3	2			**33000**	
3,00	10,0	44,0	80	9	6	2			**03000**	**03000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm



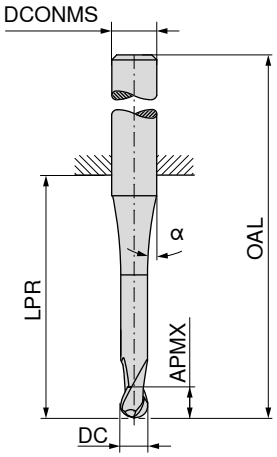

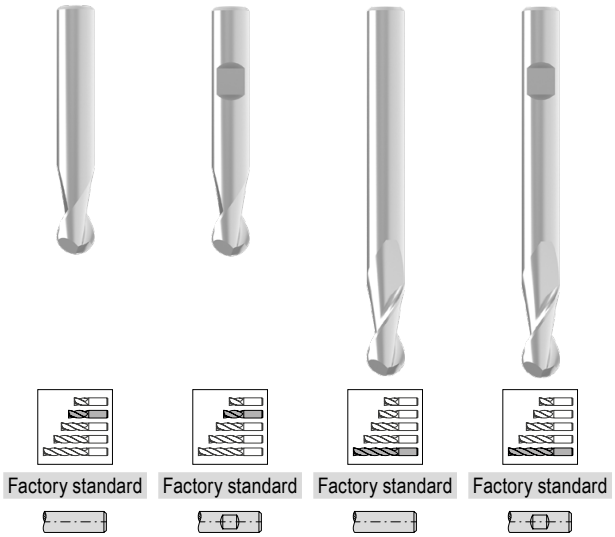

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 050 ...	52 052 ...	52 051 ...	52 053 ...
4,00	7,0	18,0	54	7	6	2	**04000**	**04000**		
4,00	7,0	26,0	54		4	2	**44000**			
4,00	13,0	47,0	75		4	2			**44000**	
4,00	13,0	44,0	80	8	6	2			**04000**	**04000**
5,00	8,0	18,0	54	6	6	2	**05000**	**05000**		
5,00	8,0	26,0	54		5	2	**55000**			
5,00	14,0	47,0	75		5	2			**55000**	
5,00	14,0	64,0	100	5	6	2			**05000**	**05000**
6,00	10,0	18,0	54		6	2	**06000**	**06000**		
6,00	16,0	64,0	100		6	2			**06000**	**06000**
8,00	12,0	23,0	59		8	2	**08000**	**08000**		
8,00	22,0	64,0	100		8	2			**08000**	**08000**
10,00	13,0	27,0	67		10	2	**10000**	**10000**		
10,00	25,0	60,0	100		10	2			**10000**	**10000**
12,00	16,0	28,0	73		12	2	**12000**	**12000**		
12,00	26,0	55,0	100		12	2			**12000**	**12000**
14,00	16,0	30,0	75		14	2	**14000**	**14000**		
14,00	26,0	55,0	100		14	2			**14000**	**14000**
16,00	20,0	35,0	83		16	2	**16000**	**16000**		
16,00	30,0	102,0	150		16	2			**16000**	**16000**
20,00	25,0	43,0	93		20	2	**20000**	**20000**		
20,00	40,0	100,0	150		20	2			**20000**	**20000**
P							●	●	●	●
M							○	○	○	○
K							●	●	●	●
N							○	○	○	○
S							○	○	○	○
H										
O							○	○	○	○

→ v_c/f_z Page 480–486

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

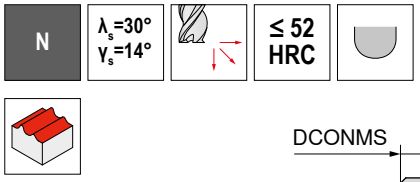

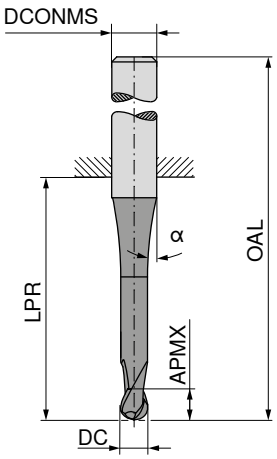

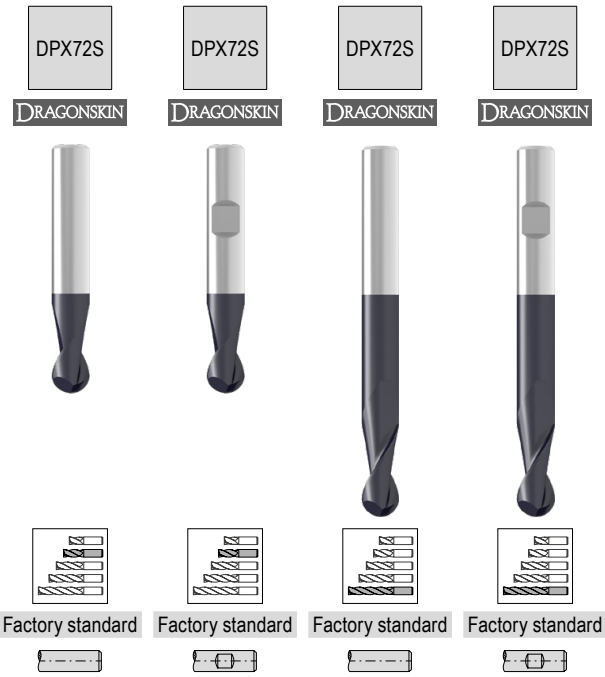

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 054 ...	52 056 ...		52 055 ...		52 057 ...	
0,10	0,2	12,5	38	8	3	2	**91000**						
0,15	0,3	11,5	38	8	3	2	**91500**						
0,20	0,4	12,0	38	8	3	2	**92000**						
0,25	0,5	12,5	38	8	3	2	**92500**						
0,30	1,0	11,3	38	8	3	2	**93000**						
0,35	1,0	11,1	38	8	3	2	**93500**						
0,40	1,0	10,9	38	8	3	2	**94000**						
0,50	1,5	11,7	38	7	3	2	**95000**						
0,50	1,5	47,0	75	7	3	2				**95000**			
0,50	1,5	44,0	80	11	6	2				**95100**			
0,50	1,5	18,0	54	11	6	2	**95100**						
0,60	1,5	11,3	38	7	3	2	**96000**						
0,70	2,0	11,4	38	7	3	2	**97000**						
0,80	2,0	11,7	38	7	3	2	**98000**						
0,90	2,5	11,7	38	7	3	2	**99000**						
1,00	2,0	22,0	50	7	3	2	**31000**						
1,00	2,0	18,0	54	10	6	2	**01000**		**01000**				
1,00	3,0	47,0	75	7	3	2				**31000**			
1,00	3,0	44,0	80	10	6	2				**01000**		**01000**	
1,10	3,0	22,0	50	6	3	2	**31100**						
1,20	3,0	22,0	50	5	3	2	**31200**						
1,40	3,0	22,0	50	5	3	2	**31400**						
1,50	3,0	22,0	50	6	3	2	**31500**						
1,50	3,0	18,0	54	10	6	2	**01500**		**01500**				
1,50	4,0	47,0	75	5	3	2				**31500**			
1,50	4,0	44,0	80	10	6	2				**01500**		**01500**	
1,60	4,0	22,0	50	6	3	2	**31600**						
1,80	4,0	22,0	50	6	3	2	**31800**						
2,00	4,0	18,0	54	9	6	2	**02000**		**02000**				
2,00	4,0	22,0	50	5	3	2	**32000**						
2,00	6,0	47,0	75	5	3	2				**32000**			
2,00	6,0	44,0	80	10	6	2				**02000**		**02000**	
2,50	5,0	18,0	54	9	6	2	**02500**		**02500**				
2,50	5,0	22,0	50	3	3	2	**32500**						
2,50	8,0	47,0	75	3	3	2				**32500**			
2,50	8,0	44,0	80	10	6	2				**02500**		**02500**	
3,00	6,0	18,0	54	9	6	2	**03000**		**03000**				

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s=30° γ_s=14° | ≤ 52 HRC

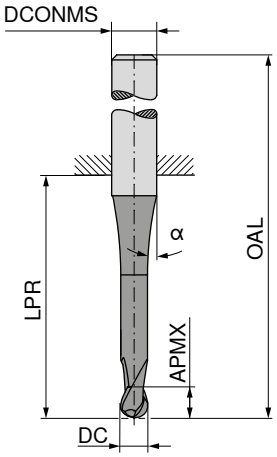

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 054 ...		52 056 ...		52 055 ...		52 057 ...	
3,00	6,0	22,0	50		3	2	**33000**							
3,00	10,0	47,0	75		3	2						**33000**		
3,00	10,0	44,0	80	9	6	2						**03000**		**03000**
4,00	7,0	18,0	54	10	6	2	**04000**		**04000**					
4,00	7,0	26,0	54		4	2	**44000**							
4,00	13,0	47,0	75		4	2						**44000**		
4,00	13,0	44,0	80	8	6	2						**04000**		**04000**
5,00	8,0	18,0	54	6	6	2	**05000**		**05000**					
5,00	8,0	26,0	54		5	2	**55000**							
5,00	14,0	47,0	75		5	2						**55000**		
5,00	14,0	64,0	100	5	6	2						**05000**		**05000**
6,00	10,0	18,0	54		6	2	**06000**		**06000**					
6,00	16,0	64,0	100		6	2						**06000**		**06000**
8,00	12,0	23,0	59		8	2	**08000**		**08000**					
8,00	22,0	64,0	100		8	2						**08000**		**08000**
10,00	13,0	27,0	67		10	2	**10000**		**10000**					
10,00	25,0	60,0	100		10	2						**10000**		**10000**
12,00	16,0	28,0	73		12	2	**12000**		**12000**					
12,00	26,0	55,0	100		12	2						**12000**		**12000**
14,00	16,0	30,0	75		14	2	**14000**		**14000**					
14,00	26,0	55,0	100		14	2						**14000**		**14000**
16,00	20,0	35,0	83		16	2	**16000**		**16000**					
16,00	30,0	102,0	150		16	2						**16000**		**16000**
18,00	22,0	45,0	93		18	2	**18000**		**18000**					
20,00	25,0	43,0	93		20	2	**20000**		**20000**					
20,00	40,0	100,0	150		20	2						**20000**		**20000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm
▲ For Ø DC ≤ 5.0 mm, angle tolerance α and β: ± 0.5°

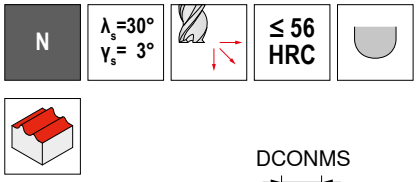

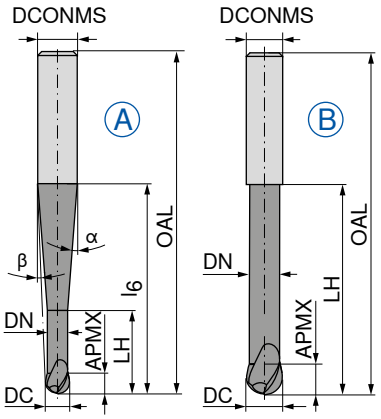

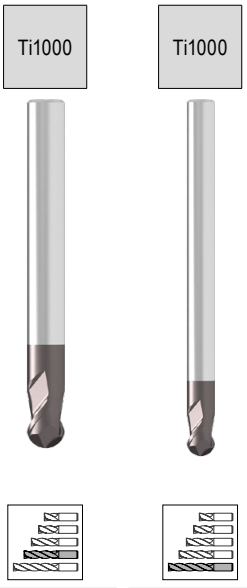



Factory standard | Factory standard

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 714 ...	52 717 ...
0,5	1,0	0,45	2,0	20	57	10	8,5	6	2	A	**005**	
1,0	2,0	0,95	4,0	20	57	10	8	6	2	A	**010**	
1,0	2,0	0,95	4,0	40	80	4,5	4	6	2	A		**010**
1,5	2,5	1,40	7,5	20	57	12,5	7	6	2	A	**015**	
1,5	2,5	1,40	7,5	40	80	4,5	3,5	6	2	A		**015**
2,0	3,0	1,80	8,0	20	57	12	6,5	6	2	A	**020**	
2,0	3,0	1,80	8,0	40	80	4	3	6	2	A		**020**
3,0	3,5	2,80	10,0	20	57	11,5	5	6	2	A	**030**	
3,0	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A		**030**
4,0	4,0	3,80	12,0	20	57	11	3,5	6	2	A	**040**	
4,0	4,0	3,80	20,0	40	80	4	1,5	6	2	A		**040**
5,0	5,0	4,70	14,0	20	57	10	2	6	2	A	**050**	
5,0	5,0	4,70	25,0	40	80	3	1	6	2	A		**050**
6,0	6,0	5,60	20,0		57			6	2	B	**060**	
6,0	6,0	5,60	40,0		80			6	2	B		**060**
6,0	6,0	5,60	25,0	60	100	2	1	8	2	A		**061**
8,0	7,0	7,60	25,0		63			8	2	B	**080**	
8,0	7,0	7,60	60,0		100			8	2	B		**080**
8,0	7,0	7,60	30,0	75	120	2	1	10	2	A		**081**
10,0	8,0	9,60	30,0		72			10	2	B	**100**	
10,0	8,0	9,60	50,0		100			10	2	B		**102**
10,0	8,0	9,60	75,0		120			10	2	B		**100**
10,0	8,0	9,60	40,0	110	160	1	1	12	2	A		**101**
12,0	10,0	11,50	35,0		83			12	2	B	**120**	
12,0	10,0	11,50	35,0	40	92	35	3,5	16	2	A	**121**	
12,0	10,0	11,50	70,0		120			12	2	B		**122**
12,0	10,0	11,50	70,0		160			12	2	B		**120**
12,0	10,0	11,50	50,0	150	200	1,5	1	16	2	A		**121**
16,0	12,0	15,50	40,0		92			16	2	B	**160**	
16,0	12,0	15,50	80,0		200			16	2	B		**160**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °



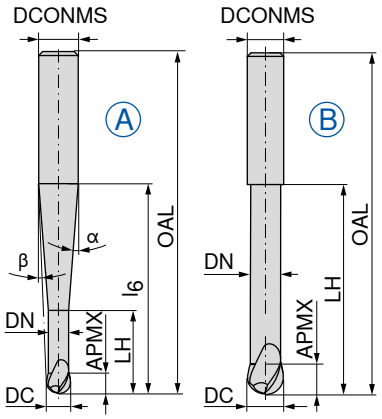

Factory standard

52 320 ...

DC e8 mm	APMX mm	DN mm	LH mm	l6 mm	OAL mm	α°	β°	DCONMS h6 mm	ZEFP	Fig.	
2	3	1,8	8	40	100	3,6	3	6	2	A	**020**
3	4	2,8	12	40	100	3,1	2,1	6	2	A	**030**
4	5	3,8	16	40	100	2,4	1,2	6	2	A	**040**
5	6	4,7	20	40	100	1,4	0,7	6	2	A	**050**
6	6	5,7	25	50	100	2,3	1,2	8	2	A	**061**
6	6	5,7	25		100			6	2	B	**060**
8	7	7,7	32		100			8	2	B	**080**
8	7	7,7	32	60	120	2	1	10	2	A	**081**
10	9	9,6	40	81	160	1,4	0,7	12	2	A	**101**
10	9	9,6	40		120			10	2	B	**100**
12	11	11,6	50		160			12	2	B	**120**
12	11	11,6	50	101	200	2,3	1,2	16	2	A	**121**
16	14	15,6	60		200			16	2	B	**160**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 480–486

14

Ball Nosed Cutter 220°

▲ Radius accuracy: ± 0,005 mm

N

λ_s=30°
γ_s= 3°

Ti1000

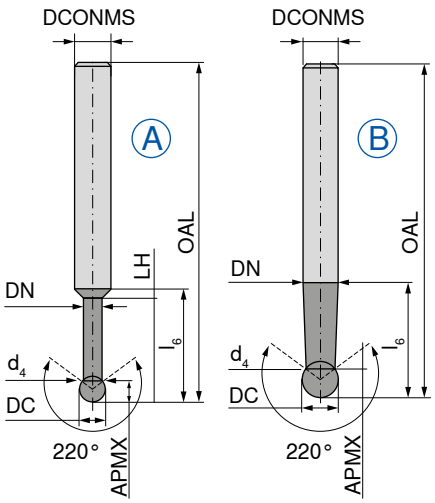

Factory standard

52 323 ...

DC $_{f8}$ mm	APMX mm	DN mm	d_4 mm	LH mm	l_6 mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	Fig.	
1,0	0,7	0,80	0,8	5	17	58	6	2	A	**010**
1,5	1,2	1,20	1,2	8	20	58	6	2	A	**015**
2,0	1,5	1,40	1,4	10	21	58	6	2	A	**020**
3,0	2,3	2,40	2,4	15	22	65	6	2	A	**030**
4,0	3,0	3,40	3,4	20	25	70	6	2	A	**040**
5,0	3,5	4,30	4,3	25	28	80	6	2	A	**050**
6,0	4,0	5,90	5,3	30	30	100	6	2	A	**060**
8,0	6,5	7,90	6,2		40	100	8	2	B	**080**
10,0	8,2	9,90	7,6		50	100	10	2	B	**100**
12,0	9,9	11,90	9,2		110	160	12	2	B	**121**
12,0	9,9	11,90	9,2		70	120	12	2	B	**120**

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s=30° γ_s=13° | HPC

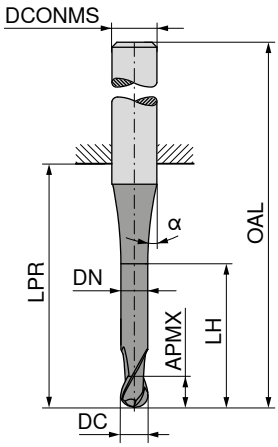

NEW

Ti1000

≈DIN 6527

54 073 ...

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	α°	ZEFP	
3	5	2,9	9	14	50	6	15	2	**03115**
4	8	3,9	12	18	54	6	45	2	**04120**
5	9	4,9	15	18	54	6	45	2	**05125**
6	10	5,9	17	18	54	6	45	2	**06130**
8	12	7,8	20	22	58	8	45	2	**08140**
10	14	9,8	26	26	66	10	45	2	**10150**
12	16	11,8	28	28	73	12	45	2	**12160**
16	22	15,7	32	34	82	16	45	2	**16180**
20	26	19,7	40	42	92	20	45	2	**20110**

P	●
M	○
K	●
N	●
S	○
H	
O	

→ v_c/f_z Page 476+477

Ball Nosed Cutter

▲ Radius accuracy: ± 0,005 mm



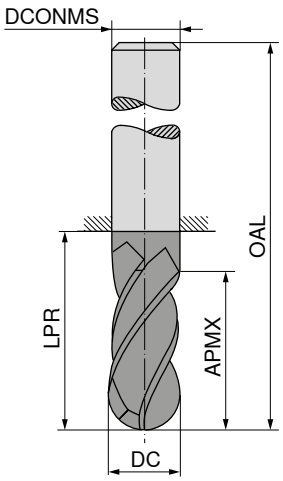

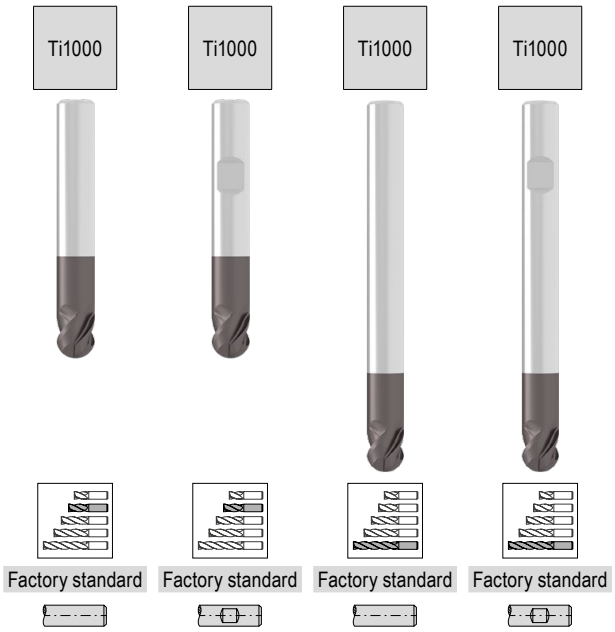

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	Factory standard 52 400 ...	Factory standard 52 401 ...	Factory standard 52 402 ...	Factory standard 52 403 ...
3	5	22	50	3	4	030			
3	5	47	75	3	4			030	
4	8	26	54	4	4	040			
4	8	47	75	4	4			040	
5	9	26	54	5	4	050			
5	9	47	75	5	4			050	
6	10	18	54	6	4	060	060		
6	10	64	100	6	4			060	060
8	12	23	59	8	4	080	080		
8	12	64	100	8	4			080	080
10	14	27	67	10	4	100	100		
10	14	60	100	10	4			100	100
12	16	29	74	12	4	120	120		
12	16	55	100	12	4			120	120
14	18	30	75	14	4	140	140		
14	18	55	100	14	4			140	140
16	22	35	83	16	4	160	160		
16	22	102	150	16	4			160	160
20	26	43	93	20	4	200	200		
20	26	100	150	20	4			200	200
P						○	○	○	○
M						●	●	●	●
K						○	○	○	○
N						●	●	●	●
S						●	●	●	●
H									
O						●	●	●	●

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s = 35° 38° | γ_s = 7° | HPC

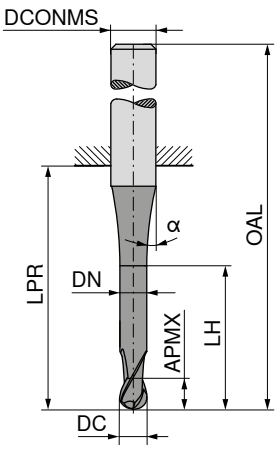

NEW Ti1000

NEW Ti1000

≈DIN 6527

≈DIN 6527

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	α°	ZEFP	54 074 ...	54 074 ...
3	8			21	57	6	30	4	03115	
3	8	2,9	15	21	57	6	45	4		03215
4	11			21	57	6	30	4	04120	
4	11	3,9	16	21	57	6	45	4		04220
5	13			21	57	6	30	4	05125	
5	13	4,9	19	21	57	6	45	4		05225
6	13			21	57	6	30	4	06130	
6	13	5,9	19	21	57	6	45	4		06430
8	19			36	72	8	30	4	08140	
8	19	7,8	25	27	72	8	45	4		08440
10	22			32	72	10	30	4	10150	
10	22	9,7	30	32	72	10	45	4		10450
12	26			38	83	12	30	4	12160	
12	26	11,7	36	38	83	12	45	4		12460
16	32			44	92	16	30	4	16180	
16	32	15,5	42	44	92	16	45	4		16480
20	38			54	104	20	30	4	20110	
20	38	19,5	52	54	104	20	45	4		20410

P	●	●
M	●	●
K	●	●
N	○	○
S		
H		
O		

→ v_c/f_z Page 478+479

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

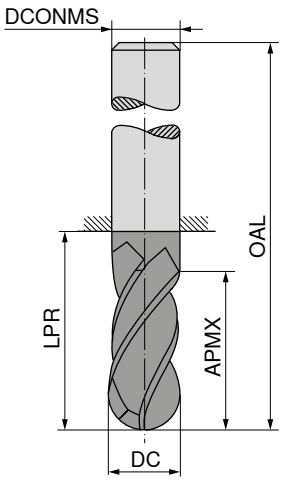

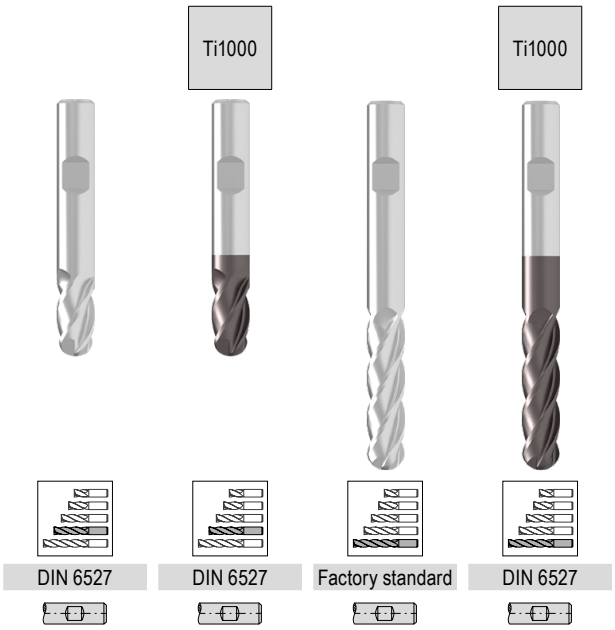

						DIN 6527	DIN 6527	Factory standard	DIN 6527
						50 642 ...	50 643 ...	50 642 ...	50 643 ...
DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP				
3	8	21	57	6	4	030	030		
4	11	21	57	6	4	040	040		
6	13	21	57	6	4	060	060		
6	40	64	100	6	4			061	061
8	19	27	63	8	4	080	080		
8	40	64	100	8	4			081	081
10	22	32	72	10	4	100	100		
10	40	60	100	10	4			101	101
12	26	38	83	12	4	120	120		
12	45	55	100	12	4			121	121
12	75	105	150	12	4			122	122
14	26	38	83	14	4	140	140		
14	45	55	100	14	4			141	141
16	32	44	92	16	4	160	160		
16	75	102	150	16	4			161	161
20	38	54	104	20	4	200	200		
20	75	100	150	20	4			201	201
P						●	●	●	●
M						○	○	○	○
K						●	●	●	●
N						○	○	○	○
S						○	○	○	○
H							○		○
O						○	○	○	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm

H | λ_s=30° γ_s= 4° | ≤ 68 HRC

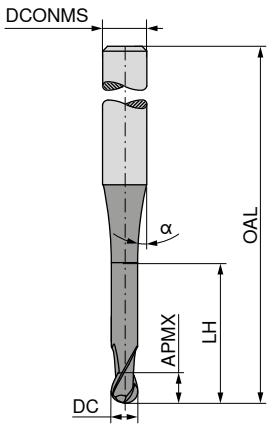

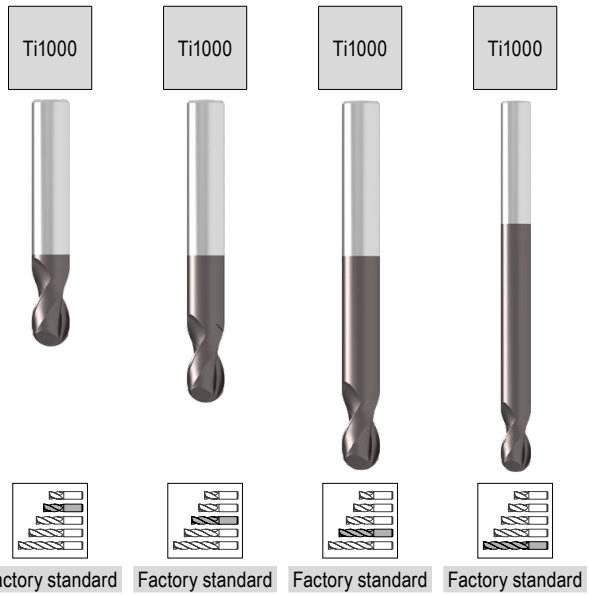

DC mm	DC Tol.	APMX mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	ZEFP	50 906 ...	50 906 ...	50 906 ...	50 906 ...
0,20	0/-0,015	0,3	0,6	40	15	4	2	**002**			
0,25	0/-0,015	0,3	0,6	40	15	4	2	**925**			
0,30	0/-0,015	0,3	0,6	40	15	4	2	**003**			
0,35	0/-0,015	0,4	0,7	40	15	4	2	**935**			
0,40	0/-0,015	0,4	0,7	40	15	4	2	**004**			
0,50	0/-0,015	0,5	0,8	40	15	4	2	**005**			
0,50	0/-0,015	0,5	0,8	54	15	6	2	**951**			
0,60	0/-0,015	0,6	0,9	40	15	4	2	**006**			
0,70	0/-0,015	0,8	1,1	40	15	4	2	**007**			
0,80	0/-0,015	0,8	1,1	40	15	4	2	**008**			
0,90	0/-0,015	0,9	1,2	40	15	4	2	**009**			
1,00	0/-0,015	1,0	1,3	54		4	2			**010**	
1,00	0/-0,015	1,0	1,3	54	15	6	2	**011**			
1,00	0/-0,015	1,0	1,3	64		6	2			**012**	
1,00	0/-0,015	1,0	1,3	80		6	2				**013**
1,00	0/-0,015	1,0	1,3	100		6	2				**014**
1,20	0/-0,015	1,2	1,5	54		4	2			**112**	
1,40	0/-0,015	1,4	1,8	54		4	2			**114**	
1,50	0/-0,015	1,5	1,9	54		4	2			**115**	
1,50	0/-0,015	1,5	1,9	54	15	6	2	**215**			
1,50	0/-0,015	1,5	1,9	80		6	2				**315**
1,60	0/-0,015	1,8	2,3	54		4	2			**116**	
1,80	0/-0,015	1,8	2,3	54		4	2			**118**	
2,00	0/-0,015	2,0	2,5	54		4	2			**206**	
2,00	0/-0,015	4,0	5,0	54		6	2			**202**	
2,00	0/-0,015	4,0	5,0	64		6	2			**207**	
2,00	0/-0,015	4,0	5,0	82		6	2				**204**
2,00	0/-0,015	4,0	5,0	100		6	2				**205**
2,50	0/-0,02	5,0	6,6	54		4	2			**251**	
2,50	0/-0,02	5,0	6,3	54	15	6	2	**252**			
2,50	0/-0,02	5,0	6,3	64		6	2			**253**	
2,50	0/-0,02	5,0	6,3	82		6	2				**254**
2,50	0/-0,02	5,0	6,3	100		6	2				**255**
3,00	0/-0,02	5,0	6,3	54		4	2			**030**	
3,00	0/-0,02	5,0	6,3	82		4	2				**032**
3,00	0/-0,02	5,0	6,3	100		4	2				**033**
3,00	0/-0,02	5,0	6,3	54	15	6	2	**035**			
3,00	0/-0,02	5,0	6,3	64		6	2			**036**	
3,00	0/-0,02	5,0	6,3	82		6	2				**037**
3,00	0/-0,02	8,0	10,0	100		6	2				**038**
4,00	0/-0,02	8,0		54	15	4	2			**040**	
4,00	0/-0,02	8,0	10,0	82	15	4	2				**042**
4,00	0/-0,02	8,0	10,0	100	15	4	2				**043**
P								●	●	●	●
M								○	○	○	○
K								●	●	●	●
N								○	○	○	○
S								○	○	○	○
H								○	○	○	○
O								○	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm

H | λ_s=30° γ_s= 4° | ≤ 68 HRC

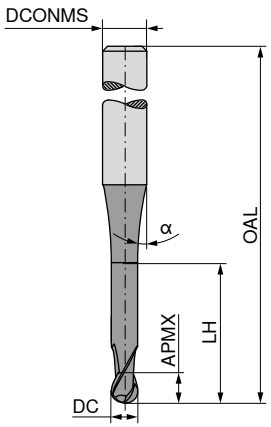

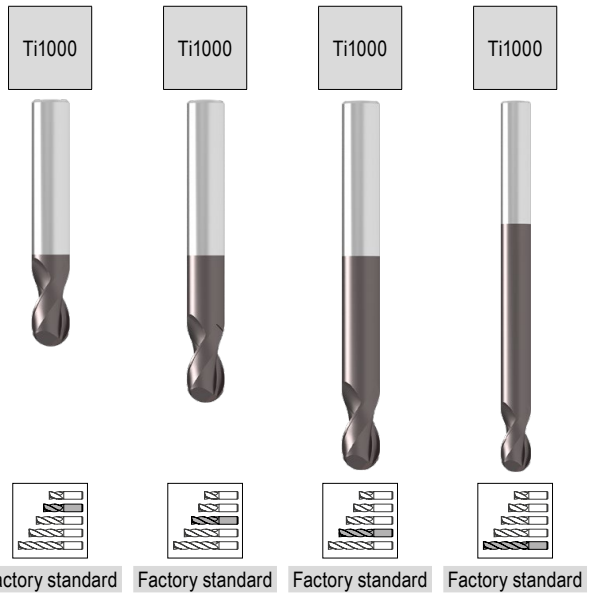

Factory standard | Factory standard | Factory standard | Factory standard

								50 906 ...		50 906 ...		50 906 ...		50 906 ...	
DC mm	DC Tol.	APMX mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	ZEFP								
4,00	0/-0,02	8,0	10,0	54	15	6	2	**045**							
4,00	0/-0,02	8,0	10,0	64		6	2						**046**		
4,00	0/-0,02	8,0	10,0	82		6	2								**047**
4,00	0/-0,02	8,0	10,0	100		6	2								**048**
5,00	0/-0,02	9,0		54	15	5	2						**050**		
5,00	0/-0,02	9,0		64	15	5	2						**051**		
5,00	0/-0,02	9,0	11,3	82	15	5	2								**052**
5,00	0/-0,02	9,0	11,3	100	15	5	2								**053**
5,00	0/-0,02	9,0	11,3	54	15	6	2	**055**							
5,00	0/-0,02	9,0	11,3	64		6	2						**056**		
5,00	0/-0,02	9,0	11,3	82		6	2								**057**
5,00	0/-0,02	9,0	11,3	100		6	2								**058**
6,00	0/-0,02	10,0		54	15	6	2	**060**							
6,00	0/-0,02	10,0		64	15	6	2						**061**		
6,00	0/-0,02	10,0		82	15	6	2								**062**
6,00	0/-0,02	10,0		100	15	6	2								**063**
6,00	0/-0,02	10,0		120	15	6	2								**064**
8,00	0/-0,025	12,0		64	15	8	2						**081**		
8,00	0/-0,025	12,0		82	15	8	2			**082**					
8,00	0/-0,025	12,0		100	15	8	2								**083**
8,00	0/-0,025	12,0		120	15	8	2								**084**
10,00	0/-0,025	14,0		67	15	10	2	**101**							
10,00	0/-0,025	14,0		82	15	10	2			**102**					
10,00	0/-0,025	14,0		100	15	10	2								**103**
10,00	0/-0,025	14,0		127	15	10	2								**104**
12,00	0/-0,025	16,0		75	15	12	2	**121**							
12,00	0/-0,025	16,0		100	15	12	2			**122**					
12,00	0/-0,025	16,0		150	15	12	2								**123**
14,00	0/-0,025	18,0		80	15	14	2	**141**							
14,00	0/-0,025	18,0		100	15	14	2			**142**					
14,00	0/-0,025	18,0		150	15	14	2								**143**
16,00	0/-0,025	22,0		85	15	16	2	**161**							
16,00	0/-0,025	22,0		150	15	16	2								**163**
20,00	0/-0,025	26,0		90	15	20	2	**201**							
20,00	0/-0,025	26,0		150	15	20	2								**203**
P								●		●		●		●	
M								○		○		○		○	
K								●		●		●		●	
N								○		○		○		○	
S								○		○		○		○	
H								○		○		○		○	
O								○		○		○		○	

→ v_c/f_z Page 480–486

Torus Cutter

W

λ_s=45°
γ_s=18°

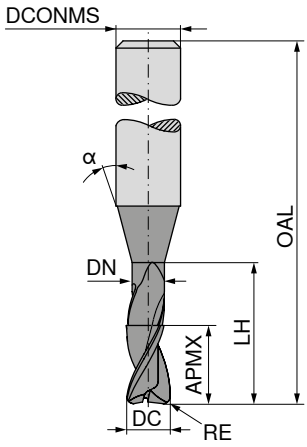

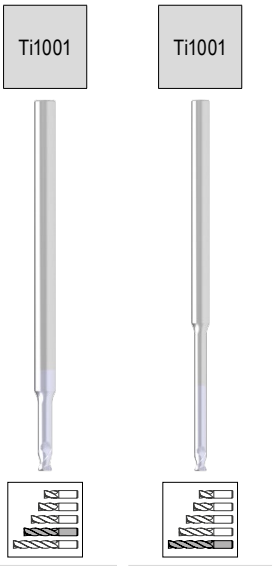

Factory standard | Factory standard

DC f8 mm	RE -0.015 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 901 ...	50 901 ...
0,2	0,02	0,2	0,18	0,6	55	15	3	2	**021**	
0,2	0,02	0,2	0,18	1,0	55	15	3	2	**022**	
0,2	0,02	0,2	0,18	1,6	55	15	3	2	**023**	
0,2	0,02	0,2	0,18	2,0	55	15	3	2	**024**	
0,3	0,03	0,3	0,28	0,9	55	15	3	2	**031**	
0,3	0,03	0,3	0,28	1,5	55	15	3	2	**032**	
0,3	0,03	0,3	0,28	2,4	55	15	3	2	**033**	
0,3	0,03	0,3	0,28	3,0	55	15	3	2	**034**	
0,4	0,04	0,4	0,37	1,2	55	15	3	2	**041**	
0,4	0,04	0,4	0,37	2,0	55	15	3	2	**042**	
0,4	0,04	0,4	0,37	3,2	55	15	3	2	**043**	
0,4	0,04	0,4	0,37	4,0	55	15	3	2	**044**	
0,5	0,05	0,5	0,45	1,5	55	15	3	2	**051**	
0,5	0,05	0,5	0,45	2,5	55	15	3	2	**052**	
0,5	0,05	0,5	0,45	4,0	55	15	3	2	**053**	
0,5	0,05	0,5	0,45	5,0	55	15	3	2	**054**	
0,6	0,06	0,6	0,58	2,0	55	15	3	2	**061**	
0,6	0,06	0,6	0,58	3,0	55	15	3	2	**062**	
0,6	0,06	0,6	0,58	4,2	55	15	3	2	**063**	
0,6	0,06	0,6	0,58	5,0	65	15	3	2		**064**
0,6	0,06	0,6	0,58	6,0	65	15	3	2		**065**
0,8	0,08	0,8	0,77	2,5	55	15	3	2	**081**	
0,8	0,08	0,8	0,77	4,0	55	15	3	2	**082**	
0,8	0,08	0,8	0,77	6,5	65	15	3	2		**083**
0,8	0,08	0,8	0,77	8,0	65	15	3	2		**084**
1,0	0,10	1,0	0,95	3,0	55	15	3	2	**101**	
1,0	0,10	1,0	0,95	5,0	55	15	3	2	**102**	
1,0	0,10	1,0	0,95	8,0	65	15	3	2		**103**
1,0	0,10	1,0	0,95	10,0	65	15	3	2		**104**
1,0	0,10	1,0	0,95	12,0	65	15	3	2		**105**
1,2	0,12	1,2	1,15	3,0	55	15	3	2	**121**	
1,2	0,12	1,2	1,15	6,0	55	15	3	2	**122**	
1,2	0,12	1,2	1,15	10,0	65	15	3	2		**123**
1,2	0,12	1,2	1,15	12,0	65	15	3	2		**124**
1,3	0,13	1,3	1,25	4,0	55	15	3	2	**131**	
1,3	0,13	1,3	1,25	7,0	55	15	3	2	**132**	
1,3	0,13	1,3	1,25	11,0	65	15	3	2		**133**
1,3	0,13	1,3	1,25	13,0	65	15	3	2		**134**
1,5	0,15	1,5	1,44	5,0	55	15	3	2	**151**	
1,5	0,15	1,5	1,44	7,5	55	15	3	2	**152**	
1,5	0,15	1,5	1,44	12,0	65	15	3	2		**153**
1,5	0,15	1,5	1,44	15,0	65	15	3	2		**154**
1,6	0,16	1,6	1,52	5,0	55	15	3	2	**161**	
1,6	0,16	1,6	1,52	8,0	55	15	3	2	**162**	
1,6	0,16	1,6	1,52	13,0	65	15	3	2		**163**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

Continued on next page

Torus Cutter

W

λ_s=45°
γ_s=18°

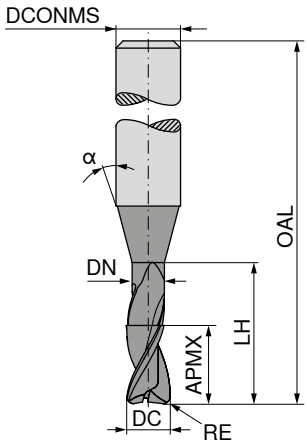

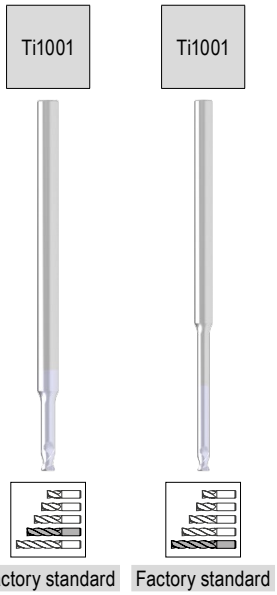

DC f8 mm	RE -0.015 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 901 ...	50 901 ...
1,6	0,16	1,6	1,52	16,0	65	15	3	2		164
1,8	0,18	1,8	1,72	5,5	55	15	3	2	181	
1,8	0,18	1,8	1,72	9,0	55	15	3	2	182	
1,8	0,18	1,8	1,72	14,5	65	15	3	2		183
1,8	0,18	1,8	1,72	18,0	65	15	3	2		184
2,0	0,20	2,0	1,92	6,0	55	15	3	2	201	
2,0	0,20	2,0	1,92	10,0	55	15	3	2	202	
2,0	0,20	2,0	1,92	14,0	55	15	3	2	203	
2,0	0,20	2,0	1,92	16,0	65	15	3	2		204
2,0	0,20	2,0	1,92	20,0	65	15	3	2		205
2,3	0,23	2,3	2,22	7,0	55	15	3	2	231	
2,3	0,23	2,3	2,22	11,5	55	15	3	2	232	
2,3	0,23	2,3	2,22	14,0	55	15	3	2	233	
2,3	0,23	2,3	2,22	18,5	65	15	3	2		234
2,3	0,23	2,3	2,22	20,0	65	15	3	2		235
2,3	0,23	2,3	2,22	23,0	65	15	3	2		236
3,0	0,30	3,0	2,90	9,0	65	15	6	2	301	
3,0	0,30	3,0	2,90	15,0	65	15	6	2	302	
3,0	0,30	3,0	2,90	24,0	100	15	6	2		303
3,0	0,30	3,0	2,90	30,0	100	15	6	2		304
4,0	0,40	4,0	3,90	12,0	65	15	6	2	401	
4,0	0,40	4,0	3,90	20,0	65	15	6	2	402	
4,0	0,40	4,0	3,90	32,0	100	15	6	2		403
4,0	0,40	4,0	3,90	40,0	100	15	6	2		404
5,0	0,50	5,0	4,90	15,0	65	15	6	2	501	
5,0	0,50	5,0	4,90	25,0	65	15	6	2	502	
5,0	0,50	5,0	4,90	40,0	100	15	6	2		503
5,0	0,50	5,0	4,90	50,0	100	15	6	2		504
6,0	0,60	6,0	5,90	18,0	65	15	6	2	601	
6,0	0,60	6,0	5,90	30,0	100	15	6	2		602
6,0	0,60	6,0	5,90	48,0	100	15	6	2		603
6,0	0,60	6,0	5,90	60,0	100	15	6	2		604

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

Torus Cutter

W

λ_s=45°
γ_s=15°

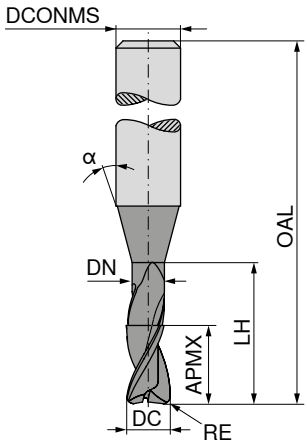

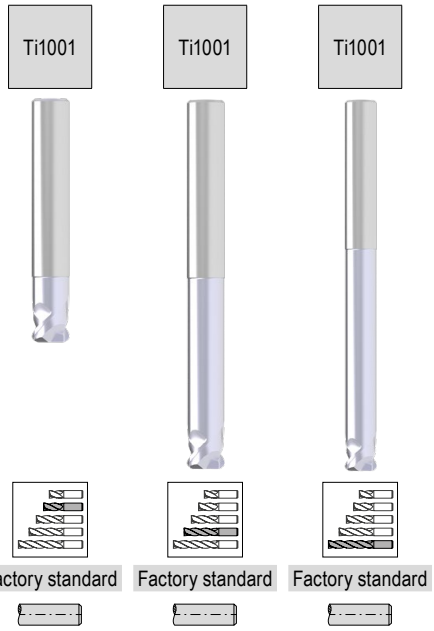

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 902 ...		50 902 ...		50 902 ...	
2	0,3	2	1,8	12	50	45	6	2	020					
2	0,5	2	1,8	12	50	45	6	2	023					
2	0,3	2	1,8	22	60	45	6	2			021			
2	0,5	2	1,8	22	60	45	6	2			024			
2	0,3	2	1,8	47	85	45	6	2						022
2	0,5	2	1,8	47	85	45	6	2						025
3	0,3	2	2,8	12	50	45	6	2	030					
3	0,5	2	2,8	12	50	45	6	2	033					
3	0,3	2	2,8	22	60	45	6	2			031			
3	0,5	2	2,8	22	60	45	6	2			034			
3	0,3	2	2,8	47	85	45	6	2						032
3	0,5	2	2,8	47	85	45	6	2						035
4	0,3	3	3,8	16	54	45	6	2	040					
4	0,5	3	3,8	16	54	45	6	2	043					
4	1,0	3	3,8	16	54	45	6	2	046					
4	0,3	3	3,8	37	75	45	6	2			041			
4	0,5	3	3,8	37	75	45	6	2			044			
4	1,0	3	3,8	37	75	45	6	2			047			
4	0,3	3	3,8	47	85	45	6	2						042
4	0,5	3	3,8	47	85	45	6	2						045
4	1,0	3	3,8	47	85	45	6	2						048
5	0,5	3	4,6	16	54	45	6	2	050					
5	1,0	3	4,6	16	54	45	6	2	052					
5	1,5	3	4,6	16	54	45	6	2	054					
5	0,5	3	4,6	37	75	45	6	2			051			
5	1,0	2	4,6	37	75	45	6	2			053			
5	1,5	3	4,6	37	75	45	6	2			055			
6	0,5	4	5,6	16	54	45	6	2	060					
6	1,0	4	5,6	16	54	45	6	2	063					
6	2,0	4	5,6	16	54	45	6	2	066					
6	0,5	4	5,6	47	85	45	6	2			061			
6	1,0	4	5,6	47	85	45	6	2			064			
6	2,0	4	5,6	47	85	45	6	2			067			
6	0,5	4	5,6	47	85	45	8	2			069			
6	1,0	4	5,6	47	85	45	8	2			070			
6	2,0	4	5,6	47	85	45	8	2			071			
6	0,5	4	5,6	62	100	45	6	2						062
6	1,0	4	5,6	62	100	45	6	2						065
6	2,0	4	5,6	62	100	45	6	2						068
8	0,5	4	7,6	20	58	45	8	2	080					

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 480–486

14

Continued on next page

Torus Cutter

W

λ_s=45°
γ_s=15°

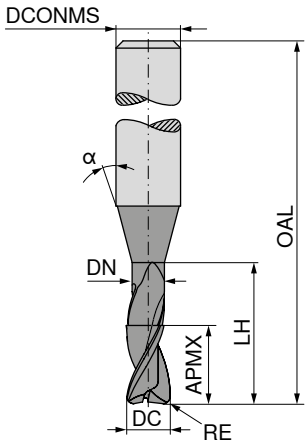

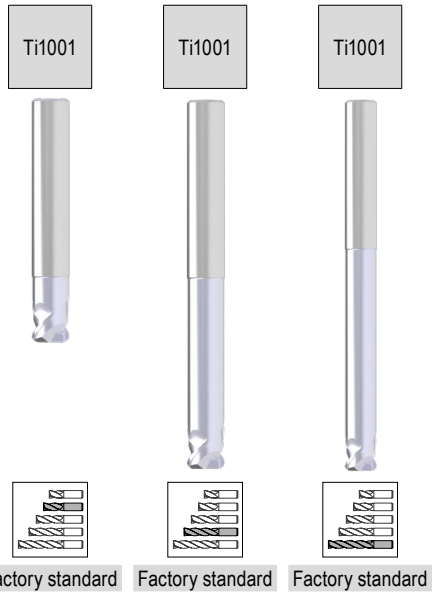

Factory standard | Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 902 ...		50 902 ...		50 902 ...	
8	1,0	4	7,6	20	58	45	8	2	082					
8	2,0	4	7,6	20	58	45	8	2	084					
8	0,5	4	7,6	62	100	45	8	2						081
8	1,0	4	7,6	62	100	45	8	2						083
8	2,0	4	7,6	62	100	45	8	2						085
8	2,0	4	7,6	62	100	45	10	2						086
10	1,0	6	9,6	18	66	45	10	2	100					
10	2,0	6	9,6	18	66	45	10	2	103					
10	3,0	6	9,6	18	66	45	10	2	106					
10	1,0	6	9,6	58	100	45	10	2			101			
10	2,0	6	9,6	58	100	45	10	2			104			
10	3,0	6	9,6	58	100	45	10	2			107			
10	1,0	6	9,6	78	120	45	10	2						102
10	2,0	6	9,6	78	120	45	10	2						105
10	3,0	6	9,6	78	120	45	10	2						108
10	1,0	6	9,6	78	120	45	12	2						109
10	2,0	6	9,6	78	120	45	12	2						110
10	3,0	6	9,6	78	120	45	12	2						111
12	1,0	8	11,5	26	73	45	12	2	120					
12	2,0	8	11,5	26	73	45	12	2	123					
12	3,0	8	11,5	26	73	45	12	2	126					
12	4,0	8	11,5	26	73	45	12	2	129					
12	1,0	8	11,5	53	100	45	12	2			121			
12	2,0	8	11,5	53	100	45	12	2			124			
12	3,0	8	11,5	53	100	45	12	2			127			
12	4,0	8	11,5	53	100	45	12	2			130			
12	1,0	8	11,5	73	120	45	12	2						122
12	2,0	8	11,5	73	120	45	12	2						125
12	3,0	8	11,5	73	120	45	12	2						128
12	4,0	8	11,5	73	120	45	12	2						131
12	1,0	8	11,5	103	150	45	16	2						132
12	2,0	8	11,5	103	150	45	16	2						133
12	3,0	8	11,5	103	150	45	16	2						134
12	4,0	8	11,5	103	150	45	16	2						135

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 480–486

Torus Cutter

W

λ_s=30°
γ_s=12°

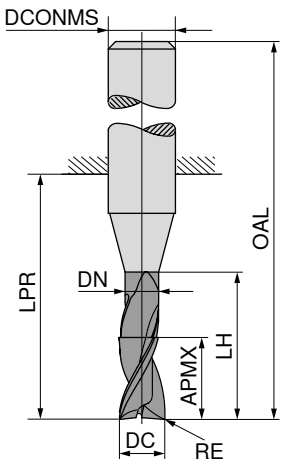

DIAMOND

Factory standard

52 765 ...

DC $_{h10}$ mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
2	0,3	8	1,8	31	32	60	2	2	**021**
3	0,5	12	2,8	41	42	70	3	2	**032**
4	0,5	15	3,8	51	52	80	4	2	**042**
5	0,5	20	4,8	71	72	100	5	2	**052**
6	0,8	20	5,8	63	64	100	6	2	**063**
8	1,0	20	7,8	83	84	120	8	2	**084**
10	1,0	25	9,8	99	100	140	10	2	**104**
12	1,5	25	11,8	104	105	150	12	2	**125**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

14

Torus Cutter

W

λ_s=30°
γ_s= 5°

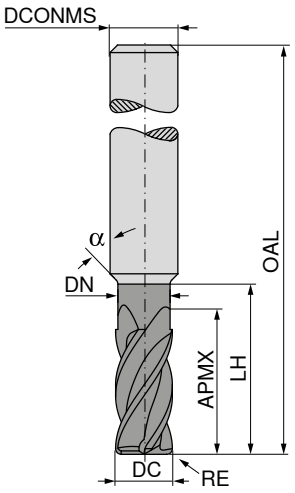

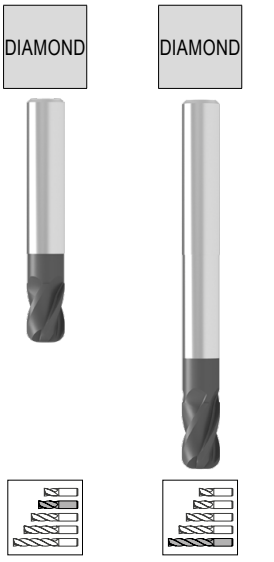

Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 911 ...	50 911 ...
4	0,5	8	3,8	12	54	45	6	4	040	
4	1,0	8	3,8	12	54	45	6	4	041	
4	0,5	10	3,8	37	75	45	6	4		042
4	1,0	10	3,8	37	75	45	6	4		043
5	0,5	9	4,8	16	54	45	6	4	050	
5	1,0	9	4,8	16	54	45	6	4	051	
5	1,5	9	4,8	16	54	45	6	4	052	
5	0,5	12	4,8	37	75	45	6	4		053
5	1,0	12	4,8	37	75	45	6	4		054
5	1,5	12	4,8	37	75	45	6	4		055
6	0,5	10	5,6	16	54	45	6	4	060	
6	1,0	10	5,6	16	54	45	6	4	061	
6	1,5	10	5,6	16	54	45	6	4	062	
6	2,0	10	5,6	16	54	45	6	4	063	
6	0,5	12	5,6	62	100	45	6	4		064
6	1,0	12	5,6	62	100	45	6	4		065
6	1,5	12	5,6	62	100	45	6	4		066
6	2,0	12	5,6	62	100	45	6	4		067
7	0,5	11	6,6	20	58	45	8	4	070	
7	1,0	11	6,6	20	58	45	8	4	071	
7	1,5	11	6,6	20	58	45	8	4	072	
7	2,0	11	6,6	20	58	45	8	4	073	
7	0,5	14	6,6	62	100	45	8	4		074
7	1,0	14	6,6	62	100	45	8	4		075
7	1,5	14	6,6	62	100	45	8	4		076
7	2,0	14	6,6	62	100	45	8	4		077
8	0,5	12	7,6	20	58	45	8	4	080	
8	1,0	12	7,6	20	58	45	8	4	081	
8	1,5	12	7,6	20	58	45	8	4	086	
8	2,0	12	7,6	20	58	45	8	4	083	
8	0,5	14	7,6	62	100	45	8	4		084
8	1,0	14	7,6	62	100	45	8	4		085
8	1,5	14	7,6	62	100	45	8	4		082
8	2,0	14	7,6	62	100	45	8	4		087
10	0,5	14	9,6	24	66	45	10	4	100	
10	1,0	14	9,6	24	66	45	10	4	101	
10	1,5	14	9,6	24	66	45	10	4	107	
10	2,0	14	9,6	24	66	45	10	4	103	
10	3,0	14	9,6	24	66	45	10	4	104	
10	0,5	18	9,6	58	100	45	10	4		105
10	1,0	18	9,6	58	100	45	10	4		106

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Continued on next page

Torus Cutter

W

λ_s=30°
γ_s= 5°

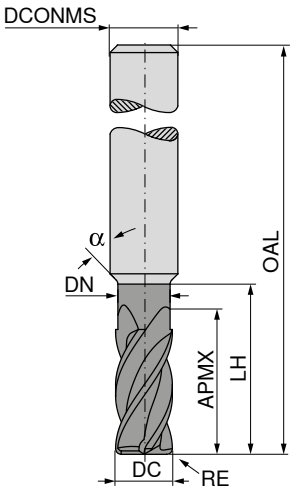

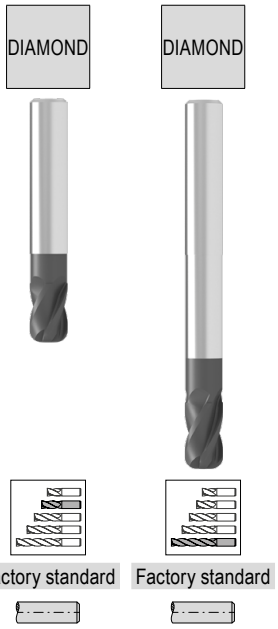

Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 911 ...	50 911 ...
10	1,5	18	9,6	58	100	45	10	4		**102**
10	2,0	18	9,6	58	100	45	10	4		**108**
10	3,0	18	9,6	58	100	45	10	4		**109**
12	0,5	16	11,5	26	73	45	12	4	**120**	
12	1,0	16	11,5	26	73	45	12	4	**121**	
12	1,5	16	11,5	26	73	45	12	4	**127**	
12	2,0	16	11,5	26	73	45	12	4	**123**	
12	4,0	16	11,5	26	73	45	12	4	**124**	
12	0,5	22	11,5	53	100	45	12	4		**125**
12	1,0	22	11,5	53	100	45	12	4		**126**
12	1,5	22	11,5	53	100	45	12	4		**122**
12	2,0	22	11,5	53	100	45	12	4		**128**
12	4,0	22	11,5	53	100	45	12	4		**129**

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Torus Cutter

▲ Radius accuracy: ± 0,005 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

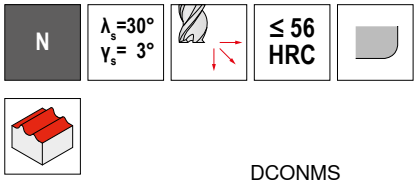

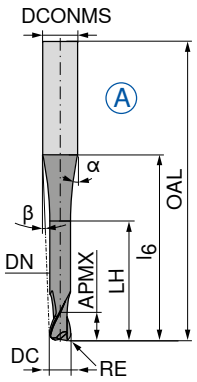

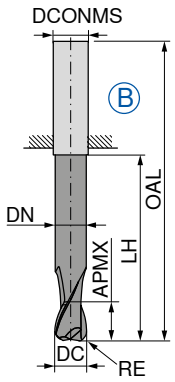





Factory standard | Factory standard

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 730 ...	52 734 ...
0,5	0,10	1,0	0,45	2,0	20	57	10	8,5	6	2	A	**005**	
1,0	0,25	2,0	0,95	4,0	20	57	10	8	6	2	A	**010**	
1,0	0,25	2,0	0,95	4,0	40	80	4,5	4	6	2	A		**010**
1,5	0,30	2,5	1,40	7,5	20	57	12,5	7	6	2	A	**015**	
1,5	0,30	2,5	1,40	7,5	40	80	4,5	3,5	6	2	A		**015**
2,0	0,50	3,0	1,80	8,0	20	57	12	6,5	6	2	A	**020**	
2,0	0,50	3,0	1,80	8,0	40	80	4	3	6	2	A		**020**
3,0	0,50	3,5	2,80	10,0	20	57	11,5	5	6	2	A	**030**	
3,0	0,50	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A		**030**
4,0	0,50	4,0	3,80	12,0	20	57	11	3,5	6	2	A	**041**	
4,0	0,50	4,0	3,80	20,0	40	80	4	1,5	6	2	A		**041**
4,0	1,00	4,0	3,80	12,0	20	57	11	3,5	6	2	A	**040**	
4,0	1,00	4,0	3,80	20,0	40	80	4	1,5	6	2	A		**040**
5,0	1,00	5,0	4,70	14,0	20	57	10	2	6	2	A	**051**	
5,0	1,00	5,0	4,70	25,0	40	80	3	1	6	2	A		**051**
5,0	1,50	5,0	4,70	14,0	20	57	10	2	6	2	A	**050**	
5,0	1,50	5,0	4,70	25,0	40	80	3	1	6	2	A		**050**
6,0	1,00	6,0	5,60	20,0		57			6	2	B	**961**	
6,0	1,00	6,0	5,60	40,0		80			6	2	B		**961**
6,0	2,00	6,0	5,60	20,0		57			6	2	B	**060**	
6,0	2,00	6,0	5,60	40,0		80			6	2	B		**060**
6,0	2,00	6,0	5,60	25,0	60	100	2	1	8	2	A		**061**
8,0	1,00	7,0	7,60	25,0		63			8	2	B	**082**	
8,0	1,00	7,0	7,60	60,0		100			8	2	B		**082**
8,0	2,00	7,0	7,60	25,0		63			8	2	B	**080**	
8,0	2,00	7,0	7,60	60,0		100			8	2	B		**080**
8,0	2,00	7,0	7,60	30,0	75	120	2	1	10	2	A		**081**
8,0	2,50	7,0	7,60	60,0		100			8	2	B		**083**
10,0	1,50	8,0	9,60	30,0		72			10	2	B	**102**	
10,0	1,50	8,0	9,60	75,0		120			10	2	B		**102**
10,0	2,50	8,0	9,60	75,0		120			10	2	B		**104**
10,0	3,00	8,0	9,60	30,0		72			10	2	B	**100**	
10,0	3,00	8,0	9,60	50,0		100			10	2	B		**103**
10,0	3,00	8,0	9,60	75,0		120			10	2	B		**100**
10,0	3,00	8,0	9,60	40,0	110	160	1	0,5	12	2	A		**101**
12,0	1,50	10,0	11,50	35,0		83			12	2	B	**122**	
12,0	1,50	10,0	11,50	70,0		160			12	2	B		**122**
12,0	4,00	10,0	11,50	35,0		83			12	2	B	**120**	
12,0	4,00	10,0	11,50	35,0	40	92	37	3,5	16	2	A	**121**	
12,0	4,00	10,0	11,50	70,0		160			12	2	B		**120**
12,0	4,00	10,0	11,50	50,0	150	200	1,5	1	16	2	A		**121**
16,0	5,00	12,0	15,50	40,0		92			16	2	B	**160**	
16,0	5,00	12,0	15,50	80,0		200			16	2	B		**160**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Torus Cutter

H | λ_s=30° γ_s= 3° | ≤ 54 HRC

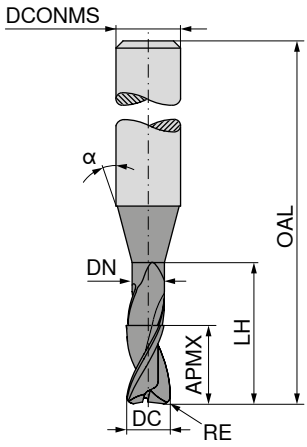

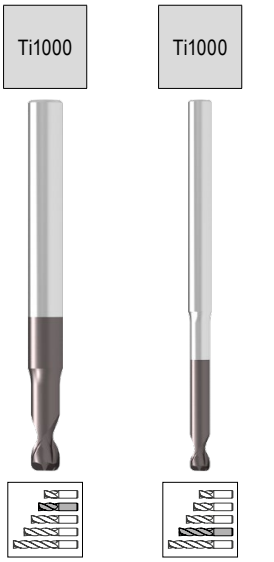

Factory standard | Factory standard

DC f8 mm	RE -0.015 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 649 ...	50 649 ...
0,4	0,04	0,4	0,37	1,2	55	15	6	2	**041**	
0,4	0,04	0,4	0,37	2,0	55	15	6	2	**042**	
0,4	0,04	0,4	0,37	3,2	55	15	6	2	**043**	
0,4	0,04	0,4	0,45	4,0	55	15	6	2	**044**	
0,5	0,05	0,5	0,45	1,5	55	15	6	2	**051**	
0,5	0,05	0,5	0,45	2,5	55	15	6	2	**052**	
0,5	0,05	0,5	0,45	4,0	55	15	6	2	**053**	
0,5	0,05	0,5	0,45	5,0	55	15	6	2	**054**	
0,6	0,06	0,6	0,58	2,0	55	15	6	2	**061**	
0,6	0,06	0,6	0,58	3,0	55	15	6	2	**960**	
0,6	0,06	0,6	0,58	5,0	65	15	6	2		**063**
0,6	0,06	0,6	0,58	6,0	65	15	6	2	**961**	
0,8	0,08	0,8	0,77	2,5	55	15	6	2	**081**	
0,8	0,08	0,8	0,77	4,0	55	15	6	2	**980**	
0,8	0,08	0,8	0,77	6,5	65	15	6	2		**083**
0,8	0,08	0,8	0,77	8,0	65	15	6	2	**981**	
1,0	0,10	1,0	0,95	3,0	55	15	6	2	**101**	
1,0	0,10	1,0	0,95	5,0	55	15	6	2	**010**	
1,0	0,10	1,0	0,95	8,0	65	15	6	2		**103**
1,0	0,10	1,0	0,95	10,0	65	15	6	2		**011**
1,0	0,10	1,0	0,95	12,0	65	15	6	2		**105**
1,2	0,12	1,2	1,15	3,0	55	15	6	2	**121**	
1,2	0,12	1,2	1,15	6,0	55	15	6	2	**012**	
1,2	0,12	1,2	1,15	10,0	65	15	6	2	**123**	
1,2	0,12	1,2	1,15	12,0	65	15	6	2		**013**
1,3	0,13	1,3	1,25	4,0	55	15	6	2	**131**	
1,3	0,13	1,3	1,25	7,0	55	15	6	2	**132**	
1,3	0,13	1,3	1,25	11,0	65	15	6	2		**133**
1,3	0,13	1,3	1,25	13,0	65	15	6	2		**134**
1,5	0,15	1,5	1,44	5,0	55	15	6	2	**151**	
1,5	0,15	1,5	1,44	7,5	55	15	6	2	**015**	
1,5	0,15	1,5	1,44	12,0	65	15	6	2		**153**
1,5	0,15	1,5	1,44	15,0	65	15	6	2		**016**
1,6	0,16	1,6	1,52	5,0	55	15	6	2	**161**	
1,6	0,16	1,6	1,52	8,0	55	15	6	2	**162**	
1,6	0,16	1,6	1,52	13,0	65	15	6	2		**163**
1,6	0,16	1,6	1,52	16,0	65	15	6	2		**164**
1,8	0,18	1,8	1,72	5,5	55	15	6	2	**181**	
1,8	0,18	1,8	1,72	9,0	55	15	6	2	**182**	
1,8	0,18	1,8	1,72	14,5	65	15	6	2		**183**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

14

Continued on next page

Torus Cutter

H | λ_s=30° γ_s= 3° | ≤ 54 HRC

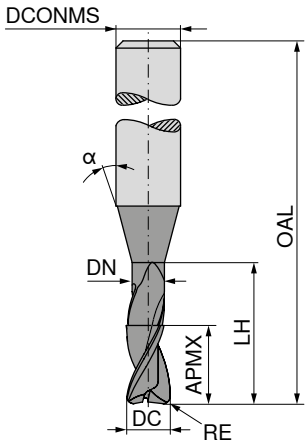

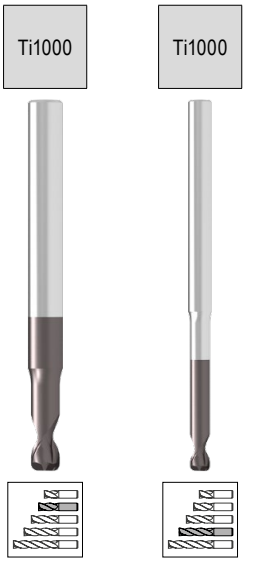

Factory standard | Factory standard

DC f8 mm	RE -0.015 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 649 ...	50 649 ...
1,8	0,18	1,8	1,72	18,0	65	15	6	2		184
2,0	0,20	2,0	1,92	6,0	55	15	6	2	201	
2,0	0,20	2,0	1,92	10,0	55	15	6	2	202	
2,0	0,20	2,0	1,92	14,0	55	15	6	2	020	
2,0	0,20	2,0	1,92	16,0	65	15	6	2		204
2,0	0,20	2,0	1,92	20,0	65	15	6	2		021
2,3	0,23	2,3	2,22	7,0	55	15	6	2	231	
2,3	0,23	2,3	2,22	11,5	55	15	6	2	232	
2,3	0,23	2,3	2,22	18,5	65	15	6	2		233
2,3	0,23	2,3	2,22	23,0	65	15	6	2		234
3,0	0,30	3,0	2,90	9,0	65	15	6	2	301	
3,0	0,30	3,0	2,90	15,0	65	15	6	2	302	
3,0	0,30	3,0	2,90	24,0	100	15	6	2		303
3,0	0,30	3,0	2,90	30,0	100	15	6	2		304
4,0	0,40	4,0	3,90	12,0	65	15	6	2	401	
4,0	0,40	4,0	3,90	20,0	65	15	6	2	402	
4,0	0,40	4,0	3,90	32,0	100	15	6	2		403
4,0	0,40	4,0	3,90	40,0	100	15	6	2		404
5,0	0,50	5,0	4,90	15,0	65	15	6	2	501	
5,0	0,50	5,0	4,90	25,0	65	15	6	2	502	
5,0	0,50	5,0	4,90	40,0	100	15	6	2		503
5,0	0,50	5,0	4,90	50,0	100	15	6	2		504
6,0	0,60	6,0	5,90	18,0	65	15	6	2	601	
6,0	0,60	6,0	5,90	30,0	100	15	6	2		602
6,0	0,60	6,0	5,90	48,0	100	15	6	2		603
6,0	0,60	6,0	5,90	60,0	100	15	6	2		604

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Torus Cutter



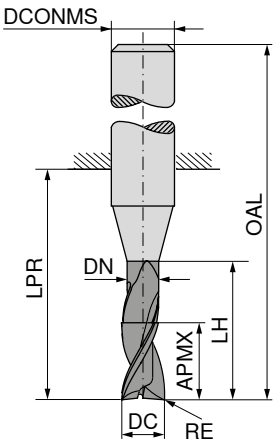

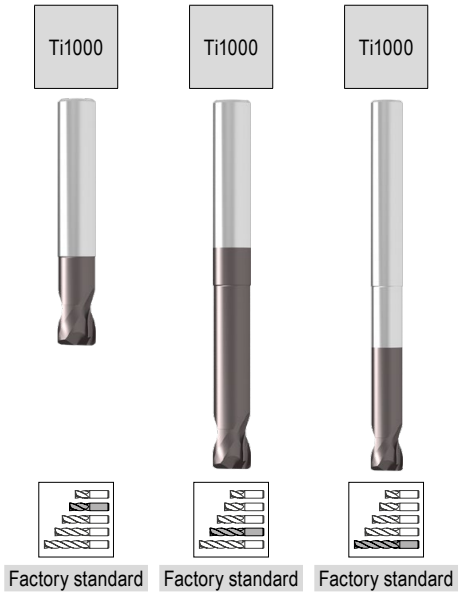

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 651 ...				
2	0,3	2	1,8	7	14	50	6	2	020				
2	0,5	2	1,8	7	14	50	6	2	021				
2	0,3	2	1,8	7	24	60	6	2			022		
2	0,5	2	1,8	7	24	60	6	2			023		
2	0,3	2	1,8	7	49	85	6	2					024
2	0,5	2	1,8	7	49	85	6	2					025
3	0,3	2	2,8	7	14	50	6	2	030				
3	0,5	2	2,8	7	14	50	6	2	031				
3	0,3	2	2,8	12	24	60	6	2			032		
3	0,5	2	2,8	12	24	60	6	2			033		
3	0,3	2	2,8	12	49	85	6	2					034
3	0,5	2	2,8	12	49	85	6	2					035
4	0,3	3	3,8	13	18	54	6	2	040				
4	0,5	3	3,8	13	18	54	6	2	041				
4	1,0	3	3,8	13	18	54	6	2	042				
4	0,3	3	3,8	20	39	75	6	2			043		
4	0,5	3	3,8	20	39	75	6	2			044		
4	1,0	3	3,8	20	39	75	6	2			045		
4	0,3	3	3,8	20	49	85	6	2					046
4	0,5	3	3,8	20	49	85	6	2					047
4	1,0	3	3,8	20	49	85	6	2					048
5	0,5	3	4,6	13	18	54	6	2	050				
5	1,0	3	4,6	13	18	54	6	2	051				
5	1,5	3	4,6	13	18	54	6	2	052				
5	1,0	3	4,6	20	39	75	6	2			053		
5	1,5	3	4,6	20	39	75	6	2			054		
6	0,5	4	5,6	14	18	54	6	2	060				
6	1,0	4	5,6	14	18	54	6	2	061				
6	2,0	4	5,6	14	18	54	6	2	062				
6	0,5	4	5,6	45	49	85	6	2			066		
6	1,0	4	5,6	45	49	85	6	2			067		
6	2,0	4	5,6	45	49	85	6	2			068		
6	0,5	4	5,6	25	64	100	6	2					069
6	1,0	4	5,6	25	64	100	6	2					070
6	2,0	4	5,6	25	64	100	6	2					071
6	0,5	4	5,6	25	49	85	8	2			063		
6	1,0	4	5,6	25	49	85	8	2			064		
6	2,0	4	5,6	25	49	85	8	2			065		
8	0,5	4	7,6	16	22	58	8	2	080				
8	1,0	4	7,6	16	22	58	8	2	081				

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–486

14

Continued on next page

Torus Cutter

H | λ_s=30° γ_s= 3° | ≤ 68 HRC

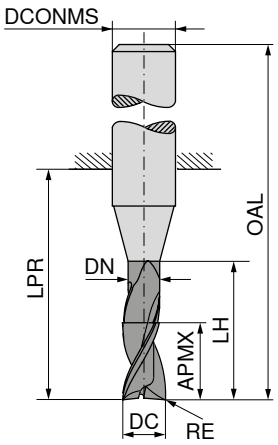

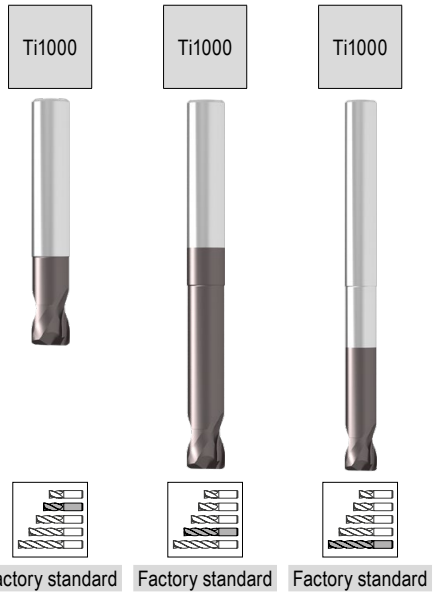

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 651 ...				
8	2,0	4	7,6	16	22	58	8	2	082				
8	0,5	4	7,6	50	64	100	8	2					083
8	2,0	4	7,6	50	64	100	8	2					084
8	1,0	4	7,6	30	60	100	10	2					085
8	2,0	4	7,6	30	60	100	10	2					086
10	1,0	6	9,6	18	26	66	10	2	100				
10	3,0	6	9,6	18	26	66	10	2	101				
10	1,0	6	9,6	50	60	100	10	2			102		
10	2,0	6	9,6	50	60	100	10	2			103		
10	3,0	6	9,6	50	60	100	10	2			104		
10	1,0	6	9,6	60	80	120	10	2					105
10	2,0	6	9,6	60	80	120	10	2					106
10	3,0	6	9,6	60	80	120	10	2					107
10	1,0	6	9,6	30	75	120	12	2					108
10	2,0	6	9,6	30	75	120	12	2					109
10	3,0	6	9,6	30	75	120	12	2					110
12	1,0	8	11,5	18	28	73	12	2	120				
12	2,0	8	11,5	18	28	73	12	2	121				
12	3,0	8	11,5	18	28	73	12	2	122				
12	4,0	8	11,5	18	28	73	12	2	123				
12	1,0	8	11,5	45	55	100	12	2			124		
12	2,0	8	11,5	45	55	100	12	2			125		
12	3,0	8	11,5	45	55	100	12	2			126		
12	4,0	8	11,5	45	55	100	12	2			127		
12	1,0	8	11,5	70	75	120	12	2					128
12	2,0	8	11,5	70	75	120	12	2					129
12	3,0	8	11,5	70	75	120	12	2					130
12	4,0	8	11,5	70	75	120	12	2					131
12	1,0	8	11,5	35	102	150	16	2					132
12	2,0	8	11,5	35	102	150	16	2					133
12	3,0	8	11,5	35	102	150	16	2					134
12	4,0	8	11,5	35	102	150	16	2					135

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–486

Torus Cutter

- ▲ Radius accuracy: ± 0,005 mm
- ▲ High-performance tool for clearing
- ▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

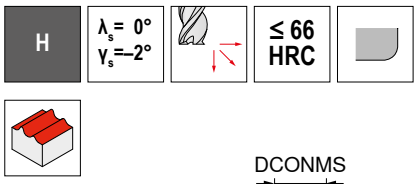

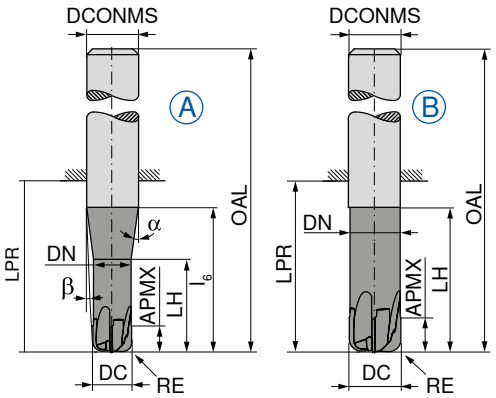

Factory standard | Factory standard

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 732 ...	52 732 ...
3	0,75	2,0	2,8	10	20	21	57	11,5	5	6	4	A	033	
4	1,00	2,5	3,8	12	20	21	57	11	3,5	6	4	A	044	
5	1,25	3,0	4,7	14	20	21	57	10	2	6	4	A	055	
6	1,50	4,0	5,6	20		21	57			6	4	B	065	
6	1,50	4,0	5,6	30		44	80			6	4	B		066
8	1,00	5,0	7,6	25		27	63			8	4	B	084	
8	1,00	5,0	7,6	35		44	80			8	4	B		085
8	2,00	5,0	7,6	25		27	63			8	4	B	086	
8	2,00	5,0	7,6	35		44	80			8	4	B		087
10	1,00	6,0	9,6	30		32	72			10	4	B	104	
10	1,00	6,0	9,6	30		32	72			10	6	B	105	
10	1,00	6,0	9,6	45		60	100			10	4	B		106
10	1,00	6,0	9,6	45		60	100			10	6	B		110
10	2,50	6,0	9,6	30		32	72			10	4	B	107	
10	2,50	6,0	9,6	30		32	72			10	6	B	108	
10	2,50	6,0	9,6	45		60	100			10	4	B		109
10	2,50	6,0	9,6	45		60	100			10	6	B		111
12	1,00	7,0	11,5	35		38	83			12	4	B	124	
12	1,00	7,0	11,5	35		38	83			12	8	B	125	
12	1,00	7,0	11,5	50		55	100			12	4	B		130
12	1,00	7,0	11,5	50		55	100			12	8	B		132
12	3,00	7,0	11,5	35		38	83			12	4	B	128	
12	3,00	7,0	11,5	35		38	83			12	8	B	129	
12	3,00	7,0	11,5	50		55	100			12	4	B		131
12	3,00	7,0	11,5	50		55	100			12	8	B		133
16	4,00	8,0	15,5	40		44	92			16	4	B	169	
16	4,00	8,0	15,5	60		72	120			16	4	B		170
16	4,00	8,0	15,5	60		72	120			16	8	B		171

P	●	●
M		
K	○	○
N		
S		
H	●	●
O		

→ v_c/f_z Page 480–486

14

Intermediate Size Torus Cutter

▲ Reduced shank Ø for flexible application in various overhang lengths!

H | λ_s=45° γ_s=12° | ≤ 56 HRC | Ti1000

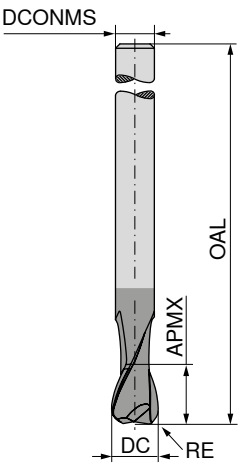

Factory standard

52 107 ...

DC $_{e8}$ mm	RE $_{\pm 0.01}$ mm	APMX mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
7	0,5	9	120	6	4	**075**
7	1,0	9	120	6	4	**076**
7	1,5	9	120	6	4	**077**
9	0,5	12	135	8	4	**095**
9	1,0	12	135	8	4	**096**
9	1,5	12	135	8	4	**097**
11	1,0	15	150	10	4	**115**
11	1,5	15	150	10	4	**116**
11	2,0	15	150	10	4	**117**
13	1,0	18	160	12	4	**135**
13	1,5	18	160	12	4	**136**
13	2,0	18	160	12	4	**137**
15	1,0	21	160	14	4	**156**
15	1,5	21	160	14	4	**157**
15	2,0	21	160	14	4	**158**
17	1,0	24	180	16	4	**176**
17	1,5	24	180	16	4	**177**
17	2,0	24	180	16	4	**178**
17	3,0	24	180	16	4	**179**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–486

Engraving cutter 60°

W

λ_s=15°
γ_s=20°



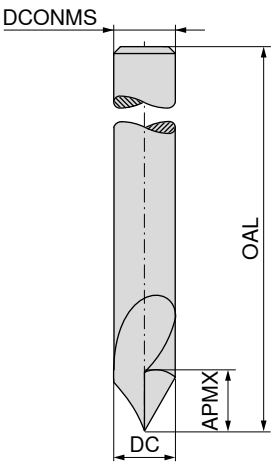

Factory standard

52 195 ...

DC $_{h6}$ mm	APMX mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	
3	15	50	3	1	**030**
4	18	50	4	1	**040**
6	20	54	6	1	**060**

P	○
M	○
K	○
N	●
S	○
H	
O	●

→ v_c/f_z Page 480–483

14

NC deburring cutter

▲ 50 940 ... / 50 943 ... Point angle α = 60°
▲ 50 941 ... / 50 944 ... Point angle α = 90°
▲ 50 942 ... / 50 945 ... Point angle α = 120°

N

λ_s=0°
γ_s=0°

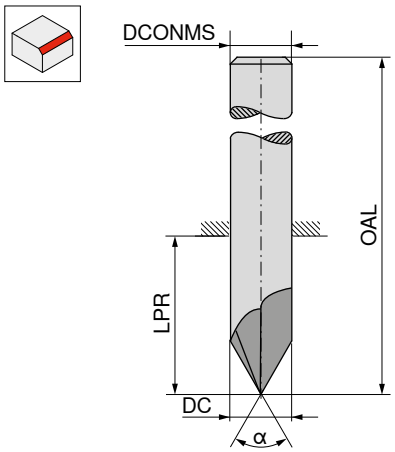

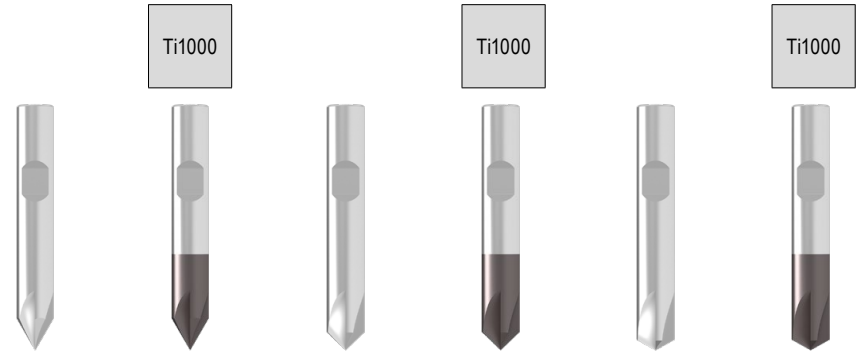

	α = 60°	α = 60°	α = 90°	α = 90°	α = 120°	α = 120°
	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard
	50 940 ...	50 943 ...	50 941 ...	50 944 ...	50 942 ...	50 945 ...

DC h6 mm	OAL mm	LPR mm	DCONMS h6 mm	ZEFP						
4	54	26	4	4	040 [1]	040 [1]	040 [1]	040 [1]	040 [1]	040 [1]
6	54	18	6	4	060	060	060	060	060	060
8	58	22	8	4	080	080	080	080	080	080
10	66	26	10	4	100	100	100	100	100	100
12	73	28	12	4	120	120	120	120	120	120

P	●	●	●	●	●	●
M	○	○	○	○	○	○
K	●	●	●	●	●	●
N	○	○	○	○	○	○
S	○	○	○	○	○	○
H		○		○		○
O	●	●	●	●	●	●

1) DIN 6535 HA Shank

→ v_c/f_z Page 480–483

NC front and rear chamfer milling cutter



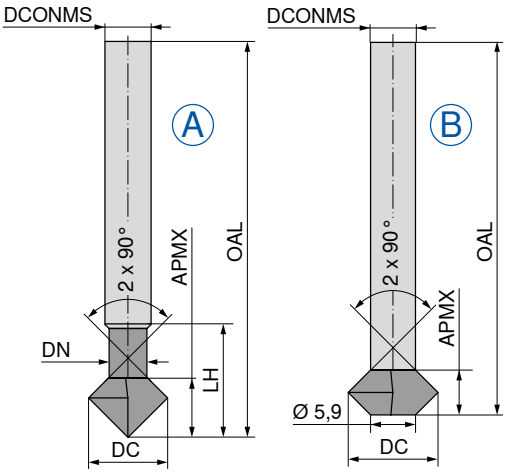

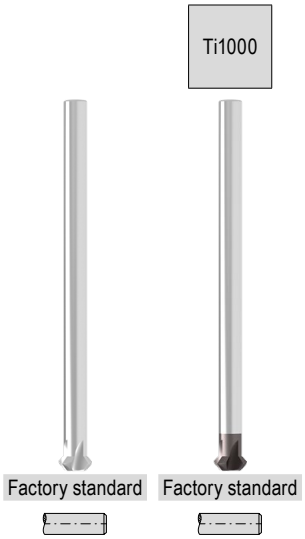

DC mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	Fig.	52 158 ...	52 159 ...
3	2,0	2,2	12,0	75	4	4	A	**030**	**030**
4	2,7	2,9	17,7	75	4	4	A	**040**	**040**
5	3,0	3,9	18,0	75	5	4	A	**050**	**050**
6	4,0	3,9	19,0	100	6	4	A	**060**	**060**
8	2,0			100	6	4	B	**080**	**080**
10	4,0			100	6	4	B	**100**	**100**
12	6,0			100	6	4	B	**120**	**120**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		○
O	●	●

→ v_c/f_z Page 480–483

Quarter-round profile milling cutter, concave



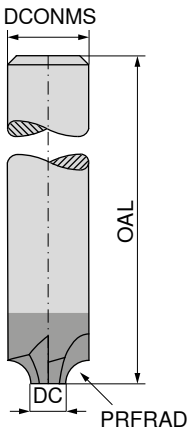

Factory standard

52 249 ...

PRFRAD +/-0,02 mm	DC mm	OAL mm	DCONMS h6 mm	ZEFP	
0,50	7,0	70	8	4	**005**
1,00	6,0	70	8	4	**010**
1,25	7,5	75	10	4	**012**
1,50	7,0	75	10	4	**015**
2,00	6,0	75	10	4	**020**
2,50	7,0	73	12	4	**025**
3,00	6,0	73	12	4	**030**
3,50	9,0	80	16	4	**035**
4,00	8,0	80	16	4	**040**
4,50	7,0	80	16	4	**045**
5,00	10,0	80	20	4	**050**
6,00	8,0	80	20	4	**060**

P	●
M	○
K	●
N	○
S	○
H	○
O	●

→ v_c/f_z Page 480–483

T-slot milling cutters

▲ Solid carbide cutting head with soldered steel shank
▲ For slots according to DIN 650
▲ **until the tool is fully in use, the feed rate fz must be reduced by 50%**

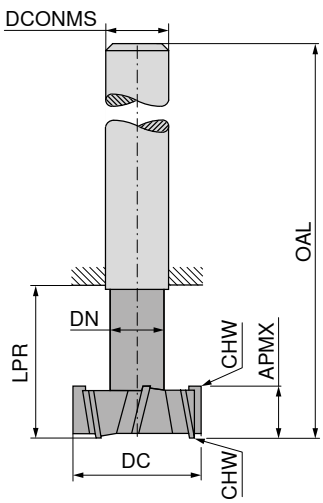

Ti1000

DIN 851 A

54 065 ...

DC e9 mm	APMX d11 mm	DN mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	
11,0	4	4	13,5	53,5	10	0,10	6	**11000**
12,5	6	5	17,0	57,0	10	0,10	6	**12500**
16,0	8	7	22,0	62,0	10	0,20	6	**16000**
18,0	8	8	25,0	70,0	12	0,20	6	**18000**
19,0	9	8	26,0	71,0	12	0,20	6	**19000**
21,0	9	10	29,0	74,0	12	0,25	6	**21000**
22,0	10	10	30,0	75,0	12	0,25	6	**22000**
25,0	11	12	34,0	82,0	16	0,30	8	**25000**
28,0	12	13	37,0	85,0	16	0,30	8	**28000**
32,0	14	15	42,0	90,0	16	0,35	8	**32000**
36,0	16	17	47,0	103,0	25	0,40	8	**36000**
40,0	18	19	52,0	108,0	25	0,40	10	**40000**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 455

Information on applications can be found in the Technical Information on → **page 488.**

Carbide burrs, similar to DIN 8033

Teeth **Z3**: Application "medium"

Teeth **Z6**: Application "medium"

v_c in min = 300–600

KSJ



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 928 ... Z3		50 928 ... Z6	
6	5	52	6	60°	606		706	
12	10	60	6	60°	612	1)	712	1)

1) Steel shank / carbide head - shank tolerance h9

KSK



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 927 ... Z3		50 927 ... Z6	
6	3	52	6	90°	606		706	
12	6	56	6	90°	612	1)	712	1)

1) Steel shank / carbide head - shank tolerance h9

ZYA



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	50 921 ... Z3		50 921 ... Z6	
3	13	40	3	303		403	
6	13	48	3	306	1)	406	1)
6	16	55	6	606		706	
8	20	65	6	608	1)	708	1)
10	20	65	6	610	1)	710	1)
12	25	70	6	612	1)	712	2)

1) Steel shank / carbide head - shank tolerance h9
2) Steel shank / carbide head - shank tolerance h7

WRC



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	50 922 ... Z3		50 922 ... Z6	
3	13	40	3	303		403	
6	13	48	3	306	1)	406	1)
6	16	50	6	606		706	
8	18	63	6	608	1)	708	1)
10	20	65	6	610	1)	710	1)
12	25	70	6	612	1)	712	1)
16	25	70	6	616	1)	716	1)

1) Steel shank / carbide head - shank tolerance h9

SKM



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 926 ... Z3		50 926 ... Z6	
3	14	40	3	9,5°	303		403	
6	13	48	3	23,0°	306	1)	406	1)
6	18	50	6	16,0°	606		706	
8	20	65	6	20,0°	608	1)	708	1)
10	20	65	6	25,0°	610	1)	710	1)
12	25	70	6	25,0°	612	1)	712	1)

1) Steel shank / carbide head - shank tolerance h9

KEL



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 923 ... Z3		50 923 ... Z6	
3	14	40	3	6°	303		403	
6	20	55	3	12°	306	1)	406	1)
6	20	50	6	10°	606		706	
8	20	65	6	14°	608	1)	708	1)
10	20	65	6	14°	610	1)	710	1)
12	30	75	6	14°	612	1)	712	1)

1) Steel shank / carbide head - shank tolerance h9

Carbide burrs, similar to DIN 8033

Teeth **Z3**: Application "medium"

Teeth **Z6**: Application "medium"

v_c in min = 300–600

SPG



Z3

Z6

DC	APMX	OAL	DCONMS	50 925 ...		50 925 ...	
mm	mm	mm	mm				
3	13	40	3	303		403	
6	13	48	3	306	1)	406	1)
6	18	50	6	606		706	
8	20	65	6	608	1)	708	1)
10	20	65	6	610	1)	710	1)
12	25	70	6	612	2)	712	1)

1) Steel shank / carbide head - shank tolerance h9
2) Steel shank / carbide head - shank tolerance h7

RBF



Z3

Z6

DC	APMX	OAL	DCONMS	50 924 ...		50 924 ...	
mm	mm	mm	mm				
3	13	40	3	303		403	
6	13	48	3	306	1)	406	1)
6	18	50	6	606		706	
8	20	65	6	608	1)	708	1)
10	20	65	6	610	1)	710	1)
12	25	70	6	612	1)	712	1)
16	30	75	6	616	1)	716	1)

1) Steel shank / carbide head - shank tolerance h9

TRE



Z3

Z6

DC	APMX	OAL	DCONMS	50 929 ...		50 929 ...	
mm	mm	mm	mm				
3	7	40	3	303		403	
6	10	45	3	306	1)	406	1)
6	10	50	6	606		706	
8	13	58	6	608	1)	708	1)
10	16	61	6	610	1)	710	1)
12	20	65	6	612	1)	712	1)

1) Steel shank / carbide head - shank tolerance h9

KUD



Z3

Z6

DC	APMX	OAL	DCONMS	50 930 ...		50 930 ...	
mm	mm	mm	mm				
3	2,7	40,0	3	303		403	
6	5,4	40,4	3	306	1)	406	1)
6	5,0	50,0	6	606		706	
8	7,2	52,2	6	608	1)	708	1)
10	9,0	54,0	6	610	1)	710	1)
12	10,8	55,8	6	612	1)	712	1)
16	14,4	59,4	6	616	1)	716	1)

1) Steel shank / carbide head - shank tolerance h9

WKN



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	50 931 ...		50 931 ...	
mm	mm	mm	mm					
3	7	40	3	10°	303		403	
6	7	50	6	10°	606		706	
12	13	58	6	20°	612	1)	712	1)

1) Steel shank / carbide head - shank tolerance h9

14

Solid carbide circular saw blades

▲ fine-straight-cut







DIN 1837 A

54 700 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	
15	0,20	5	64	102
15	0,25	5	64	103
15	0,30	5	64	104
15	0,35	5	64	105
15	0,40	5	64	106
15	0,50	5	48	107
15	0,60	5	48	108
15	0,70	5	48	109
15	0,80	5	40	110
15	0,90	5	40	111
15	1,00	5	40	112
15	1,10	5	40	113
15	1,20	5	40	114
15	1,30	5	40	115
15	1,40	5	40	116
15	1,50	5	40	117
15	1,60	5	40	118
15	1,70	5	40	119
15	1,80	5	40	120
15	1,90	5	40	121
15	2,00	5	40	122
15	2,50	5	40	123
15	3,00	5	40	124
15	3,50	5	40	125
15	4,00	5	40	126
15	4,50	5	40	127
15	5,00	5	40	128
15	5,50	5	40	129
15	6,00	5	40	130
20	0,20	5	80	152
20	0,25	5	64	153
20	0,30	5	64	154
20	0,35	5	64	155
20	0,40	5	64	156
20	0,50	5	48	157
20	0,60	5	48	158
20	0,70	5	48	159
20	0,80	5	48	160
20	0,90	5	40	161
20	1,00	5	40	162
20	1,10	5	40	163
20	1,20	5	40	164
20	1,30	5	40	165
20	1,40	5	40	166
20	1,50	5	40	167
20	1,60	5	40	168
20	1,70	5	40	169
20	1,80	5	32	170
20	1,90	5	32	171
20	2,00	5	32	172
20	2,50	5	32	173
20	3,00	5	32	174
20	3,50	5	24	175
20	4,00	5	24	176
20	4,50	5	24	177
20	5,00	5	24	178
20	5,50	5	24	179
20	6,00	5	24	180
25	0,20	8	80	202

54 700 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	
25	0,25	8	80	203
25	0,30	8	80	204
25	0,35	8	64	205
25	0,40	8	64	206
25	0,50	8	64	207
25	0,60	8	64	208
25	0,70	8	48	209
25	0,80	8	48	210
25	0,90	8	48	211
25	1,00	8	48	212
25	1,10	8	48	213
25	1,20	8	48	214
25	1,30	8	40	215
25	1,40	8	40	216
25	1,50	8	40	217
25	1,60	8	40	218
25	1,70	8	40	219
25	1,80	8	40	220
25	1,90	8	40	221
25	2,00	8	40	222
25	2,50	8	40	223
25	3,00	8	32	224
25	3,50	8	32	225
25	4,00	8	32	226
25	4,50	8	32	227
25	5,00	8	32	228
25	5,50	8	24	229
25	6,00	8	24	230
30	0,20	8	100	252
30	0,25	8	100	253
30	0,30	8	80	254
30	0,35	8	80	255
30	0,40	8	80	256
30	0,50	8	80	257
30	0,60	8	64	258
30	0,70	8	64	259
30	0,80	8	64	260
30	0,90	8	64	261
30	1,00	8	64	262
30	1,10	8	64	263
30	1,20	8	48	264
30	1,30	8	48	265
30	1,40	8	48	266
30	1,50	8	48	267
30	1,60	8	48	268
30	1,70	8	48	269
30	1,80	8	48	270
30	1,90	8	48	271
30	2,00	8	48	272
30	2,50	8	40	273
30	3,00	8	40	274
30	3,50	8	40	275
30	4,00	8	40	276
30	4,50	8	32	277
30	5,00	8	32	278
30	5,50	8	32	279
30	6,00	8	32	280

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/fz Page 469

Diameters 80–200 mm, and the coarse toothed variant according to DIN 1838 B can be found in our online shop.

Solid carbide circular saw blades

▲ fine-straight-cut







DIN 1837 A

54 700 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	
40	0,20	10	128	**302**
40	0,25	10	100	**303**
40	0,30	10	100	**304**
40	0,35	10	100	**305**
40	0,40	10	100	**306**
40	0,50	10	80	**307**
40	0,60	10	80	**308**
40	0,70	10	80	**309**
40	0,80	10	80	**310**
40	0,90	10	64	**311**
40	1,00	10	64	**312**
40	1,10	10	64	**313**
40	1,20	10	64	**314**
40	1,30	10	64	**315**
40	1,40	10	64	**316**
40	1,50	10	64	**317**
40	1,60	10	64	**318**
40	1,70	10	48	**319**
40	1,80	10	48	**320**
40	1,90	10	48	**321**
40	2,00	10	48	**322**
40	2,50	10	48	**323**
40	3,00	10	48	**324**
40	3,50	10	48	**325**
40	4,00	10	40	**326**
40	4,50	10	40	**327**
40	5,00	10	40	**328**
40	5,50	10	40	**329**
40	6,00	10	40	**330**
50	0,20	13	128	**352**
50	0,25	13	128	**353**
50	0,30	13	128	**354**
50	0,35	13	100	**355**
50	0,40	13	100	**356**
50	0,50	13	100	**357**
50	0,60	13	100	**358**
50	0,70	13	80	**359**
50	0,80	13	80	**360**
50	0,90	13	80	**361**
50	1,00	13	80	**362**
50	1,10	13	80	**363**
50	1,20	13	80	**364**
50	1,30	13	64	**365**
50	1,40	13	64	**366**
50	1,50	13	64	**367**
50	1,60	13	64	**368**
50	1,70	13	64	**369**
50	1,80	13	64	**370**
50	1,90	13	64	**371**
50	2,00	13	64	**372**
50	2,50	13	64	**373**
50	3,00	13	48	**374**
50	3,50	13	48	**375**
50	4,00	13	48	**376**
50	4,50	13	48	**377**
50	5,00	13	48	**378**
50	5,50	13	40	**379**
50	6,00	13	40	**380**
63	0,20	16	160	**402**

54 700 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	
63	0,25	16	160	**403**
63	0,30	16	128	**404**
63	0,35	16	128	**405**
63	0,40	16	128	**406**
63	0,50	16	128	**407**
63	0,60	16	100	**408**
63	0,70	16	100	**409**
63	0,80	16	100	**410**
63	0,90	16	100	**411**
63	1,00	16	100	**412**
63	1,10	16	80	**413**
63	1,20	16	80	**414**
63	1,30	16	80	**415**
63	1,40	16	80	**416**
63	1,50	16	80	**417**
63	1,60	16	80	**418**
63	1,70	16	80	**419**
63	1,80	16	80	**420**
63	1,90	16	80	**421**
63	2,00	16	80	**422**
63	2,50	16	64	**423**
63	3,00	16	64	**424**
63	3,50	16	64	**425**
63	4,00	16	64	**426**
63	4,50	16	64	**427**
63	5,00	16	48	**428**
63	5,50	16	48	**429**
63	6,00	16	48	**430**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/fz Page 469

Diameters 80–200 mm, and the coarse toothed variant according to DIN 1838 B can be found in our online shop.

14

Cylindrical shank adapter for circular saw blades

▲ DCONWS = circular saw blade bore diameter

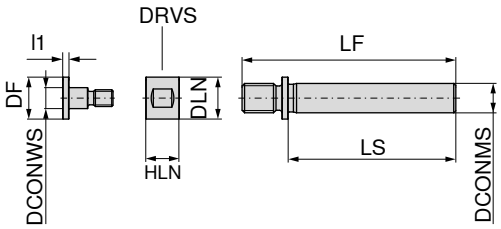

DCONWS h7 mm	DCONMS h7 mm	DLN mm	DF mm	LF mm	LS mm	HLN mm	l_1 mm	DRVS mm	72 900 ...
5	7	10	10	51	40	8	3	9	**005**
5	10	10	10	61	50	8	3	9	**105**
8	7	15	15	51	40	8	3	14	**008**
8	10	15	15	61	50	8	3	14	**108**
10	7	17	17	53	40	10	3	16	**010**
10	10	17	17	63	50	10	3	16	**110**
10	16	17	17	74	55	10	3	16	**210**
13	10	20	20	66	50	10	3	18	**113**
13	16	20	20	77	55	10	3	18	**213**
16	10	24	24	66	50	14	3	22	**116**
16	16	24	24	79	55	14	3	22	**216**

Screw - SR

Lock nut - KM

Spare parts for Article no.	72 945 ...	72 945 ...
72 900 005	**000**	**005**
72 900 105	**000**	**005**
72 900 008	**001**	**006**
72 900 108	**001**	**006**
72 900 010	**002**	**007**
72 900 110	**002**	**007**
72 900 210	**010**	**012**
72 900 113	**003**	**008**
72 900 213	**003**	**008**
72 900 116	**004**	**009**
72 900 216	**011**	**013**

Application data for plastics cutters

Material	Strength N/mm² – HB	50 983 … 50 984 … 50 985 … 50 986 …	50 932 …	50 937 …	50 936 …	50 938 …	50 610 … 50 611 …	50 946 …	50 948 …	50 947 …
Aluminium (non alloyed, low alloyed)	< 350 N/mm²						●			
Aluminium	< 500 N/mm²						●			
Aluminium alloy 0,5–10% Si	< 400 N/mm²						●			
Aluminium alloy 10 - 15% Si	< 400 N/mm²					●		●	●	●
Aluminium	< 400 N/mm²					●		●	●	
Copper (non alloyed, low alloyed)	< 350 N/mm²						●			
Copper wrought alloys	< 700 N/mm²					●		●	●	●
Special copper alloys	< 200 HB					●		●	●	●
Special copper alloys	< 300 HB					●		●	●	●
Special copper alloys	< 300 HB					●		●	●	●
Short-chipping brass, bronze, red bronze	< 600 N/mm²						●			
Long-chipping brass	< 600 N/mm²						●			
Magnesium and Magnesium Alloys	< 850 N/mm²					●		●	●	●
Tungsten and tungsten alloys									●	●
Molybdenum and molybdenum alloys									●	●
Thermoplastics							●			
Duroplastics		●	●	●			●			
Fibre-reinforced plastics		●	●	●	●	●		●	●	●
Graphite		●	●	●	●	●		●		●
Machining direction		↘ 1	↘ 2	↘ 3	↘ 4	↘ 5	↘ 6	↘ 7	↘ 8	↘ 9

Tips

1


▲ Very sharp cutting edges for GFK and CFK and to prevent delamination of the component.

2

▲ For excellent tool life when machining AFK, CFK and Graphite.

3

4

▲ Specialist for machining honeycomb materials; Milling of pockets not fully through the workpiece.

5

▲ Specialist for machining honeycomb materials.

▲ Milling of recesses that pass through the material, the lower deck is pushed and upper deck pulled therefore the workpiece material is stabilized.

6

▲ For machining non fibre-reinforced plastics and non-ferrous metals with low silicon content. (PE, PA, PVC, acrylic glass)

7

8

▲ For machining fibre-reinforced plastics and non-ferrous metals with high silicon content.

9

14

Cutter for plastics

- ▲ right hand cutting
- ▲ cross-pitched
- ▲ Downward chip evacuation
- ▲ 50 983 ... = fine pitch
- ▲ 50 984 ... = medium pitch



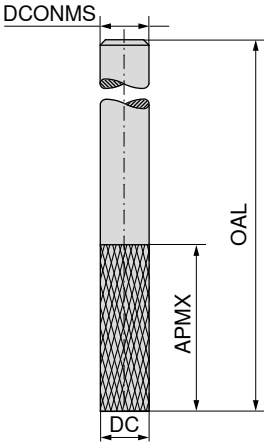





DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm		50 983 ...		50 984 ...
					Factory standard		Factory standard
2,0	7	40	2,0		**020**		**020**
2,0	7	50	6,0		**021**		**021**
3,0	10	40	3,0		**030**		**030**
3,0	12	50	6,0		**031**		**031**
3,5	12	40	3,5		**035**		**035**
4,0	15	40	4,0		**040**		**040**
4,0	20	50	6,0		**041**		**041**
4,5	15	50	4,5		**045**		**045**
5,0	16	50	5,0		**050**		**050**
5,0	25	75	6,0		**051**		**051**
6,0	18	50	6,0		**060**		**060**
6,0	35	75	6,0		**061**		**061**
7,0	22	60	7,0		**070**		**070**
8,0	25	63	8,0		**080**		**080**
8,0	40	100	8,0		**081**		**081**
9,0	25	63	9,0		**090**		**090**
10,0	30	72	10,0		**100**		**100**
12,0	32	83	12,0		**120**		**120**
14,0	32	83	14,0		**140**		**140**
16,0	36	92	16,0		**160**		**160**
18,0	40	92	18,0		**180**		**180**
20,0	45	104	20,0		**200**		**200**
				P			
				M			
				K			
				N			
				S			
				H			
				O	●		●

→ v_c/f_z Page 418

Cutter for plastics

- ▲ right hand cutting
- ▲ cross-pitched
- ▲ Downward chip evacuation
- ▲ 50 985 ... = fine pitch
- ▲ 50 986 ... = medium pitch



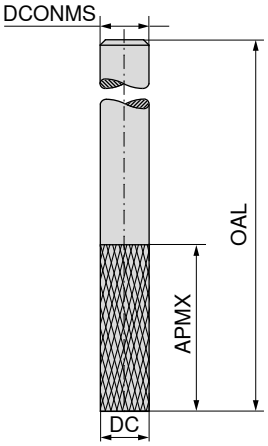

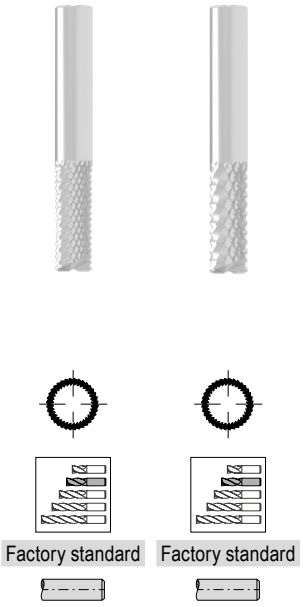

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	50 985 ...		50 986 ...
2,0	7	40	2,0	**020**		**020**
2,0	7	50	6,0	**021**		**021**
3,0	10	40	3,0	**030**		**030**
3,0	12	50	6,0	**031**		**031**
3,5	12	40	3,5	**035**		**035**
4,0	15	40	4,0	**040**		**040**
4,0	20	50	6,0	**041**		**041**
4,5	15	50	4,5	**045**		**045**
5,0	16	50	5,0	**050**		**050**
5,0	25	75	6,0	**051**		**051**
6,0	18	50	6,0	**060**		**060**
6,0	35	75	6,0	**061**		**061**
7,0	22	60	7,0	**070**		**070**
8,0	25	63	8,0	**080**		**080**
8,0	40	100	8,0	**081**		**081**
9,0	25	63	9,0	**090**		**090**
10,0	30	72	10,0	**100**		**100**
12,0	32	83	12,0	**120**		**120**
14,0	32	83	14,0	**140**		**140**
16,0	36	92	16,0	**160**		**160**
18,0	40	92	18,0	**180**		**180**
20,0	45	104	20,0	**200**		**200**

P		
M		
K		
N		
S		
H		
O	●	●

→ v_c/f_z Page 418

Ball nosed cutter for plastics

▲ right hand cutting
▲ cross-pitched

W



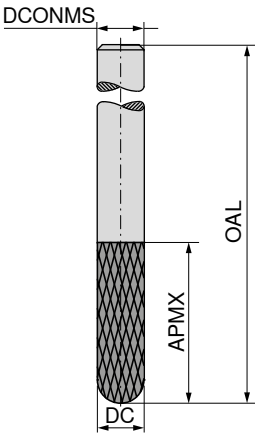

DIAMOND

Factory standard

50 932 ...

DC $_{h10}$ mm	APMX mm	OAL mm	DCONMS $_{h6}$ mm	
2	7	40	2	**020**
2	7	50	6	**022**
3	10	40	3	**030**
3	12	50	6	**032**
4	15	40	4	**040**
4	20	50	6	**042**
5	16	50	5	**050**
5	25	75	6	**052**
6	18	50	6	**060**
6	35	75	6	**062**
8	25	63	8	**080**
8	40	100	8	**082**
10	30	72	10	**100**
12	32	83	12	**120**
16	36	92	16	**160**
20	40	104	20	**200**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 418

Cutter for plastics

▲ right hand cutting
▲ cross-pitched





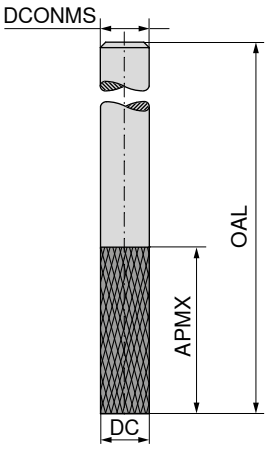

Factory standard

50 937 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	
5	16	60	6	**050**
5	28	75	6	**052**
6	20	60	6	**060**
6	35	75	6	**062**
8	22	63	8	**080**
8	40	100	8	**082**
10	25	72	10	**100**
10	50	100	10	**102**
12	30	83	12	**120**
12	50	100	12	**122**
16	35	92	16	**160**
16	60	125	16	**162**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 418

Cutter for honeycomb materials



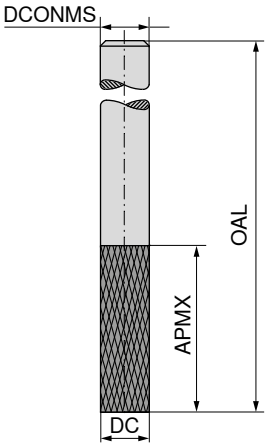



Factory standard

50 936 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	
6	16	50	6	**006**
8	19	63	8	**008**
10	22	72	10	**010**
12	26	83	12	**012**
16	17	100	12	**016**
20	17	100	12	**020**
24	10	100	12	**024**
24	17	100	12	**025**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 418

Right and left hand helix cutter for fibre re-inforced plastics



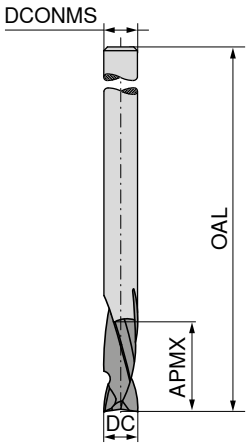

Ti28

Factory standard

50 938 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	
2	6	40	6	2	**020**
3	12	40	3	2	**030**
3	12	50	6	2	**032**
4	14	40	4	2	**040**
5	16	50	5	2	**050**
6	18	50	6	2	**060**
8	20	63	8	2	**080**
10	25	72	10	2	**100**
12	30	83	12	2	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

14

Single flute cutter

▲ With polished chip flutes

W

λ_s=25°
γ_s=25°





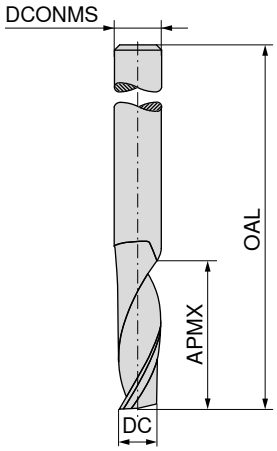



Right-hand helix
right-hand cutting
Factory standard

Left-hand helix
right-hand cutting
Factory standard

DC $_{h10}$ mm	APMX mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	50 610 ...		50 611 ...	
1,5	6	40	3,0	1		015		015
2,0	10	40	2,0	1		020		020
2,0	6	40	3,0	1		019		019
2,0	10	60	6,0	1		022		022
2,0	12	60	6,0	1		024		024
2,5	6	40	2,5	1		025		025
3,0	12	60	6,0	1		034		034
3,0	12	40	3,0	1		030		030
3,0	10	40	6,0	1		032		032
3,0	15	60	6,0	1		036		036
4,0	20	75	6,0	1		044		044
4,0	15	40	4,0	1		040		040
4,0	15	60	6,0	1		042		042
5,0	16	60	6,0	1		052		052
5,0	16	50	5,0	1		050		050
5,0	28	75	6,0	1		054		054
6,0	20	60	6,0	1		060		060
6,0	30	60	6,0	1		062		062
6,0	35	75	6,0	1		064		064
8,0	22	63	8,0	1		080		080
8,0	40	100	8,0	1		084		084
10,0	55	100	10,0	1		105		105
10,0	25	72	10,0	1		100		100
12,0	30	83	12,0	1		120		120
16,0	35	92	16,0	1		160		160

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Cutter for plastics

▲ With polished flutes



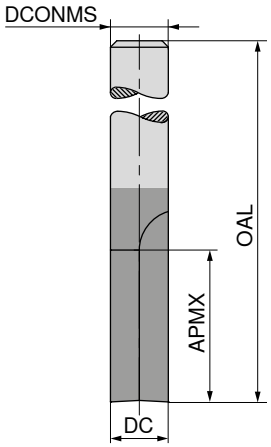

Factory standard

50 946 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	
1,5	6	40	3	1	**015**
2,0	6	40	3	1	**020**
2,0	10	40	2	1	**022**
2,0	10	60	6	1	**024**
2,0	12	60	6	1	**026**
3,0	12	40	3	1	**030**
3,0	12	60	6	1	**032**
3,0	15	60	6	1	**034**
4,0	15	60	6	1	**040**
4,0	20	75	6	1	**042**
5,0	16	60	6	1	**050**
5,0	28	75	6	1	**052**
6,0	20	60	6	1	**060**
6,0	30	60	6	1	**062**
6,0	35	75	6	1	**064**
8,0	22	63	8	1	**080**
8,0	40	100	8	1	**082**
10,0	25	72	10	1	**100**
10,0	55	100	10	1	**102**
12,0	30	83	12	1	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

Cutter for plastics

▲ with polished flutes



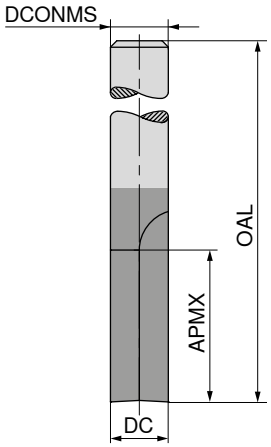



Factory standard

50 948 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	
2	6	40	6	2	**020**
3	12	40	3	2	**030**
3	12	50	6	2	**031**
4	14	40	6	2	**040**
5	16	50	5	2	**050**
6	18	50	6	2	**060**
8	20	63	8	2	**080**
10	25	72	10	2	**100**
12	30	83	12	2	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

Ball nosed cutter for plastics

▲ with polished flutes
▲ irregular pitch



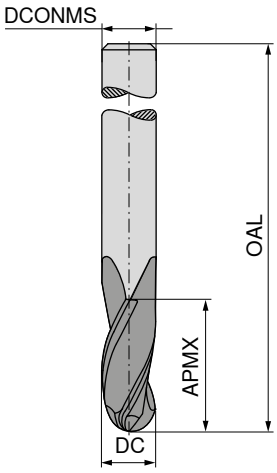

DIN 6527 L

50 947 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	
3	10	57	6	3	**030**
4	13	57	6	3	**040**
5	15	57	6	3	**050**
6	18	57	6	3	**060**
8	20	63	8	3	**080**
10	25	72	10	3	**100**
12	30	83	12	3	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

14

Slot milling cutter



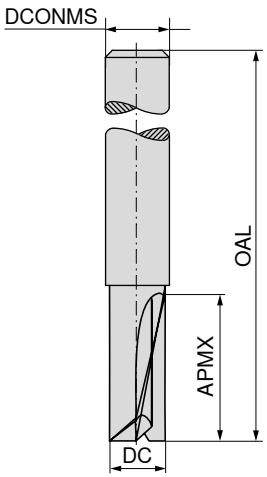

Factory standard

52 168 ...

DC e8 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	
2	8	50	3	2	**020**
3	12	50	3	2	**030**
4	13	60	4	2	**040**
5	14	60	5	2	**050**
6	16	58	6	2	**060**
8	20	65	8	2	**080**
10	22	70	10	2	**100**
12	25	70	12	2	**120**

P	●
M	○
K	●
N	○
S	○
H	
O	●

→ v_c/f_z Page 480–483

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

14

Cutting data standard values – MonsterMill – SCR – End mill, short – long

Index	Emulsion	Compressed air	MMS	52 600 ..., 52 601 ..., 52 602 ..., 52 603 ..., 52 604 ..., 52 606 ..., 52 607 ..., 52 608 ..., 52 611 ..., 52 612 ...																	
				Ø DC (mm) =																	
				3,0–3,5			4,0–4,5						5,0–5,5			6,0–7,5			8,0–9,5		
				Type short	Type long	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Type short	Type long	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)						$a_{p\,max.}$ x DC		f_z (mm)							
P.1.1	90	160		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
P.1.2	90	150		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.3	90	150		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.4	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.5	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.1	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.2	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.3	80	120		1,0	1,0	0,025	0,019	0,014	0,035	0,027	0,020	1,0	1,0*	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.2.4	80	120		1,0	1,0	0,025	0,019	0,014	0,035	0,027	0,020	1,0	1,0*	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.3.1	90	140		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.2	80	130		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.3	80	110		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.4.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
P.4.2	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.1.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.2.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.3.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
K.1.1		200		1,0	1,0	0,040	0,031	0,022	0,055	0,043	0,031	1,0	1,0*	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.1.2		180		1,0	1,0	0,040	0,031	0,022	0,055	0,043	0,031	1,0	1,0*	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.2.1		200		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.2.2		180		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.3.1		140		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
K.3.2		140		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1	150	280		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
N.3.2	140	230		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.3.3	140	230		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.4.1																						
S.1.1	45			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.1.2	45			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.1	30			0,5	0,5	0,018	0,014	0,010	0,025	0,019	0,014	0,5	0,5	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
S.2.2	30			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.3	30			0,5	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.3.1	80			0,5	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,5	0,5	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
S.3.2	60			0,5	0,5	0,025	0,019	0,014	0,035	0,027	0,019	0,5	0,5	0,050	0,037	0,025	0,066	0,049	0,033	0,09	0,07	0,04
S.3.3	60			0,5	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,5	0,5	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
H.1.1		80		0,3	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,3	0,3	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
H.1.2		60		0,15	0,15	0,016	0,012	0,009	0,022	0,017	0,012	0,15	0,15	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
H.1.3																						
H.1.4																						
H.2.1		120		0,5	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,5	0,5	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
H.3.1		80		0,3	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,3	0,3	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
O.1.1	180	300		1,0	1,0	0,067	0,052	0,038	0,094	0,073	0,053	1,0	1,0*	0,135	0,101	0,068	0,180	0,134	0,090	0,24	0,18	0,12
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

*= With an a_p of 1.5xD, the feed rate per tooth f_z should be multiplied by 0.8

SCR ball nosed cutters at full slot, reduce f_z by 25%!

Plunging angle for ramping and helical milling:
No. of teeth 4 = 4 °/ No. of teeth 6 = 1°

Index	52 600 ..., 52 601 ..., 52 602 ..., 52 603 ..., 52 604 ..., 52 606 ..., 52 607 ..., 52 608 ..., 52 611 ..., 52 612 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	10,0–11,5			12,0			14,0–15,5			16,0–17,0			18,0–19,5			20,0					
	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
P.1.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.3	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.2.4	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.3.1	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.2	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.4.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
P.4.2	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.1.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.2.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.3.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
K.1.1	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,21	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16		●	
K.1.2	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,21	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16		●	
K.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
K.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
K.3.1	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
K.3.2	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
N.3.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.3.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.4.1																					
S.1.1	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07	●		
S.2.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.3	0,07	0,05	0,04	0,08	0,03	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.3.1	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
S.3.2	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,11	0,09	0,16	0,13	0,10	●		
S.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
H.1.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
H.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06		●	
H.1.3																					
H.1.4																					
H.2.1	0,09	0,07	0,05	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08		●	
H.3.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
O.1.1	0,30	0,22	0,15	0,33	0,25	0,17	0,33	0,26	0,18	0,36	0,27	0,21	0,38	0,31	0,24	0,43	0,35	0,27	●		○
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Feed rate guide values for ball nosed and torus cutters on → **Page 486**

Cutting data standard values – MonsterMill – SCR– End mill, extra long

Index	Emulsion	Compressed air	MMS	Type extra long		52 605 ... / 52 608 ...															
						Ø DC (mm) = 3			4			5			6			8			
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)															
P.1.1	80	110		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
P.1.2	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.3	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.4	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.5	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.1	80	90		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.2	80	90		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.3	70	80		1,0*	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.2.4	70	80		1,0*	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.3.1	70	80		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.2	70	80		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.3	70	80		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.4.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
P.4.2	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.1.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.2.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.3.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
K.1.1		160		1,0*	0,5	0,040	0,031	0,022	0,055	0,043	0,031	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.1.2		120		1,0*	0,5	0,040	0,031	0,022	0,055	0,043	0,031	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.2.1		160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.2.2		120		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.3.1		100		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
K.3.2		100		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	120	240		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
N.3.2	100	200		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.3.3	100	200		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.4.1																					
S.1.1	40			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.1.2	40			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.1	25			0,5*	0,25	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
S.2.2	25			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.3	25			0,5*	0,25	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.3.1	60			0,5*	0,25	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
S.3.2	50			0,5*	0,25	0,025	0,019	0,014	0,035	0,027	0,019	0,050	0,037	0,025	0,066	0,049	0,033	0,09	0,07	0,04
S.3.3	50			0,5*	0,25	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
H.1.1		60		0,5*	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
H.1.2		50		0,5*	0,15	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
H.1.3																					
H.1.4																					
H.2.1		80		0,5*	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
H.3.1		60		0,5*	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
O.1.1	120	240		1,0*	0,5	0,067	0,052	0,038	0,094	0,073	0,053	0,135	0,101	0,068	0,180	0,134	0,090	0,24	0,18	0,12
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

* = Trimming and trochoidal slot milling

Plunging angle for ramping and helical milling: No. of teeth 4 = 4 °/
No. of teeth 6 = 1°

Index	52 605 ... / 52 608 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	10			12			14			16			18			20					
	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
P.1.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.3	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.2.4	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.3.1	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.2	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.4.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
P.4.2	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.1.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.2.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.3.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
K.1.1	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,20	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16	○	●	○
K.1.2	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,20	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16	○	●	○
K.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
K.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
K.3.1	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
K.3.2	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
N.3.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.3.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.4.1																					
S.1.1	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07	●		
S.2.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.3	0,07	0,05	0,04	0,08	0,03	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.3.1	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
S.3.2	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,09	0,07	0,12	0,10	0,08	0,14	0,11	0,09	0,16	0,13	0,10	●		
S.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
H.1.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
H.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06		●	
H.1.3																					
H.1.4																					
H.2.1	0,09	0,07	0,05	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08		●	
H.3.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
O.1.1	0,30	0,22	0,15	0,33	0,25	0,17	0,33	0,26	0,18	0,33	0,27	0,21	0,38	0,31	0,24	0,43	0,35	0,27	●		○
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – MonsterMill – SCR – Torus face cutter, long

Index	v_c (m/min)	Type long $a_{p\,max.}$ x DC	52 609 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	150	1,0	0,019	0,017	0,012	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.1.2	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.1.3	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.1.4	140	1,0	0,019	0,017	0,012	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.1.5	140	1,0	0,019	0,017	0,012	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.2.1	150	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.2.2	150	1,0	0,019	0,017	0,012	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.2.3	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.2.4	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.3.1	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.3.2	150	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.3.3	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.4.1																		
P.4.2																		
M.1.1																		
M.2.1																		
M.3.1																		
K.1.1	170	1,0	0,028	0,025	0,018	0,043	0,033	0,024	0,056	0,042	0,028	0,072	0,054	0,036	0,10	0,07	0,05	
K.1.2	170	1,0	0,028	0,025	0,018	0,043	0,033	0,024	0,056	0,042	0,028	0,072	0,054	0,036	0,10	0,07	0,05	
K.2.1	150	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,046	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04	
K.2.2	150	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,046	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04	
K.3.1	80	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
K.3.2	80	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1	80	0,3	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
H.1.2	60	0,15	0,009	0,008	0,006	0,014	0,011	0,008	0,020	0,015	0,010	0,024	0,018	0,012	0,03	0,02	0,02	
H.1.3																		
H.1.4																		
H.2.1	100	0,5	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
H.3.1	80	0,3	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	52 609 ... Ø DC (mm) = 10			12			16			● 1st choice ○ suitable		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)											
P.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.1.2	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.1.3	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.1.4	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.1.5	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.2.1	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.2.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.2.3	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.2.4	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.3.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.3.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.3.3	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
K.1.2	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
K.2.1	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
K.2.2	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
K.3.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
K.3.2	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
H.1.2	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03		●	
H.1.3												
H.1.4												
H.2.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
H.3.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – MonsterMill – SCR – Torus face cutter, HSC machining

Index	v_c (m/min)	a_p x DC	a_e x DC	52 609 ... Ø DC (mm) = 3	4	5	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
				f_z (mm)										
P.1.1	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.1.2	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.1.3	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.1.4	190	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
P.1.5	190	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
P.2.1	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.2.2	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.2.3	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.2.4	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.3.1	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.3.2	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.3.3	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.4.1														
P.4.2														
M.1.1														
M.2.1														
M.3.1														
K.1.1	230	0,05	0,6	0,120	0,160	0,200	0,240	0,32	0,40	0,48	0,64	○	●	
K.1.2	230	0,05	0,6	0,120	0,160	0,200	0,240	0,32	0,40	0,48	0,64	○	●	
K.2.1	200	0,04	0,5	0,096	0,130	0,160	0,192	0,26	0,32	0,38	0,51	○	●	
K.2.2	200	0,04	0,5	0,096	0,130	0,160	0,192	0,26	0,32	0,38	0,51	○	●	
K.3.1	100	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
K.3.2	100	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
N.1.1														
N.1.2														
N.2.1														
N.2.2														
N.2.3														
N.3.1														
N.3.2														
N.3.3														
N.4.1														
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1	100	0,03	0,3	0,060	0,080	0,100	0,120	0,16	0,20	0,24	0,32		●	
H.1.2	90	0,02	0,3	0,048	0,064	0,080	0,096	0,13	0,16	0,19	0,26		●	
H.1.3	80	0,02	0,2	0,024	0,056	0,070	0,084	0,11	0,14	0,17	0,22		●	
H.1.4	60	0,02	0,2	0,036	0,048	0,060	0,072	0,10	0,12	0,14	0,19		●	
H.2.1	130	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38		●	
H.3.1	100	0,03	0,3	0,060	0,080	0,100	0,120	0,16	0,20	0,24	0,32		●	
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

Cutting data standard values – MonsterMill – FRP CR fine pitched

Index	Compressed air	Type long	52 598 ...					● 1st choice ○ suitable		
			Ø DC (mm) =							
			> Ø 5 ≤ Ø 6	> Ø 6 ≤ Ø 8	> Ø 8 ≤ Ø 10	> Ø 10 ≤ Ø 12	> Ø 12 ≤ Ø 14			
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f (mm/rev)					Emulsion	Compressed air	MMS
O.1.1										
O.1.2										
O.2.1										
O.2.2	200	1,0	0,125	0,150	0,175	0,200	0,225		●	
O.3.1										

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

Cutting data standard values – MonsterMill – FRP CR coarse pitched

Index	Compressed air	Type long	52 599 ...					● 1st choice ○ suitable		
			Ø DC (mm) =							
			> Ø 5 ≤ Ø 6	> Ø 6 ≤ Ø 8	> Ø 8 ≤ Ø 10	> Ø 10 ≤ Ø 12	> Ø 12 ≤ Ø 14			
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f (mm/rev)					Emulsion	Compressed air	MMS
O.1.1										
O.1.2										
O.2.1										
O.2.2	200	1,5	0,100	0,120	0,140	0,160	0,180		●	
O.3.1										

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

Cutting data standard values – MonsterMill – FRP

Index	Compressed air	Type long	52 595 ..., 52 596 ..., 52 597 ...					● 1st choice ○ suitable		
			Ø DC (mm) =							
			> Ø 5 ≤ Ø 6	> Ø 6 ≤ Ø 8	> Ø 8 ≤ Ø 10	> Ø 10 ≤ Ø 12	> Ø 12 ≤ Ø 14			
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f (mm/rev)					Emulsion	Compressed air	MMS
O.1.1										
O.1.2										
O.2.1										
O.2.2	200	1,0	0,018	0,022	0,026	0,03	0,034		●	
O.3.1										

The optimum usage recommendations may differ from those provided here depending on the machining process and application.
Please get in touch with your contact at CERATIZIT to determine the best recommendation for your application.

Cutting data standard values – MonsterMill – ICR – End mill, short

Index	Emulsion	Compressed air	MMS	Type short	52 784 ... Ø DC (mm) = 1,5			2			2,5			● 1st choice ○ suitable		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	v_c (m/min)			$a_{p\,max.}$ x DC	f_z (mm)											
P.1.1	140	130		0,25	0,014	0,013	0,010	0,020	0,019	0,014	0,029	0,024	0,018	○	●	○
P.1.2	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.1.3	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.1.4	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.1.5	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.2.1	120			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.2.2	120	110		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.2.3	80	90		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	○	●	○
P.2.4	80	90		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	○	●	○
P.3.1	80	90		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
P.3.2	80	90		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
P.3.3	100	110		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
P.4.1	100			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
P.4.2	100			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
M.1.1	**100**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
M.2.1	**80**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
M.3.1	**100**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
K.1.1		180		0,25	0,020	0,019	0,014	0,025	0,024	0,018	0,036	0,030	0,022		●	
K.1.2		160		0,25	0,020	0,019	0,014	0,025	0,024	0,018	0,036	0,030	0,022		●	
K.2.1		180		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019		●	
K.2.2		160		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019		●	
K.3.1		120		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
K.3.2		120		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1	280	280		0,25	0,007	0,007	0,005	0,020	0,019	0,014	0,029	0,024	0,018	●		○
N.3.2	220	220		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
N.3.3	220	220		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
N.4.1																
S.1.1	45			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
S.1.2	45			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
S.2.1	25			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
S.2.2	30			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
S.2.3	25			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
S.3.1	80			0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	●		
S.3.2	60			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
S.3.3	60			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
H.1.1		80		0,20	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013		●	
H.1.2		60		0,15	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012		●	
H.1.3																
H.1.4																
H.2.1		80		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015		●	
H.3.1		80		0,20	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013		●	
O.1.1	300	300		0,25	0,029	0,027	0,020	0,043	0,040	0,030	0,051	0,043	0,032	●		○
O.1.2																
O.2.1																
O.2.2																
O.3.1																

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/
No. of teeth 4 = 4°/No. of teeth 5 = 3°

Cutting data standard values – MonsterMill – ICR – End mill, short – long

Index	Emulsion	Compressed air	MMS	Type short	Type long	52 784 ..., 52 786 ... Ø DC (mm) = 3 a_e 0,1–0,2 x DC	3 a_e 0,3–0,4 x DC	3 a_e 0,6–1,0 x DC	4 a_e 0,1–0,2 x DC	4 a_e 0,3–0,4 x DC	4 a_e 0,6–1,0 x DC	5 a_e 0,1–0,2 x DC	5 a_e 0,3–0,4 x DC	5 a_e 0,6–1,0 x DC	6 a_e 0,1–0,2 x DC	6 a_e 0,3–0,4 x DC	6 a_e 0,6–1,0 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)														
P.1.1	140	130		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	○	●	○
P.1.2	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.1.3	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.1.4	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.1.5	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.2.1	120	110		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.2.2	120	110		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.2.3	80	90		1,0	1,0*	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	○	●	○
P.2.4	80	90		1,0	1,0*	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	○	●	○
P.3.1	80	90		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
P.3.2	80	90		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
P.3.3	100	110		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
P.4.1	100			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
P.4.2	100			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
M.1.1	**100**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
M.2.1	**80**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
M.3.1	**100**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
K.1.1		180		1,0	1,0*	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053		●	
K.1.2		160		1,0	1,0*	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053		●	
K.2.1		180		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045		●	
K.2.2		160		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045		●	
K.3.1		120		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
K.3.2		120		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	280	280		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,741	0,572	0,413	●		○
N.3.2	220	220		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
N.3.3	220	220		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
N.4.1																				
S.1.1	45			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
S.1.2	45			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
S.2.1	25			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
S.2.2	30			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
S.2.3	25			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
S.3.1	80			0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	●		
S.3.2	60			0,5	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
S.3.3	60			0,5	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
H.1.1		80		0,3	0,3	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030		●	
H.1.2		60		0,15	0,15	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026		●	
H.1.3																				
H.1.4																				
H.2.1		80		0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034		●	
H.3.1		80		0,3	0,3	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030		●	
O.1.1	300	300		1,0	1,0*	0,058	0,045	0,033	0,108	0,083	0,060	0,135	0,104	0,075	0,162	0,125	0,090	●		○
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

* = with an a_p of 1.5 x d_1 the f_z should be multiplied by 0.8

Continued on the next page

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/
No. of teeth 4 = 4°/No. of teeth 5 = 3°

14

Cutting data standard values – MonsterMill – ICR – End mill, short – long

Index	Emulsion	Compressed air	MMS	Type short	Type long	52 784 ..., 52 786 ... Ø DC (mm) = 8			10			12			14		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)											
P.1.1	140	130		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
P.1.2	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.1.3	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.1.4	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.1.5	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.2.1	120	110		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.2.2	120	110		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.2.3	80	90		1,0	1,0*	0,08	0,06	0,05	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08
P.2.4	80	90		1,0	1,0*	0,08	0,06	0,05	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08
P.3.1	80	90		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
P.3.2	80	90		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
P.3.3	100	110		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
P.4.1	100			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06
P.4.2	100			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06
M.1.1	**100**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
M.2.1	**80**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
M.3.1	**100**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
K.1.1		180		1,0	1,0*	0,13	0,10	0,07	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12
K.1.2		160		1,0	1,0*	0,13	0,10	0,07	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12
K.2.1		180		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,14	0,11	0,08	0,19	0,15	0,11
K.2.2		160		1,0	1,0*	0,11	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,19	0,15	0,11
K.3.1		120		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
K.3.2		120		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1	280	280		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
N.3.2	220	220		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
N.3.3	220	220		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
N.4.1																	
S.1.1	45			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
S.1.2	45			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
S.2.1	25			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
S.2.2	30			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
S.2.3	25			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,05	0,06	0,13	0,10	0,07
S.3.1	80			0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
S.3.2	60			0,5	0,5	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
S.3.3	60			0,5	0,5	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
H.1.1		80		0,3	0,3	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
H.1.2		60		0,15	0,15	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
H.1.3																	
H.1.4																	
H.2.1		80		0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
H.3.1		80		0,3	0,3	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
O.1.1	300	300		1,0	1,0*	0,22	0,17	0,12	0,27	0,21	0,15	0,32	0,25	0,18	0,38	0,29	0,21
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

* = with an a_p of 1.5 x d_1 the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/
No. of teeth 4 = 4°/No. of teeth 5 = 3°

Index	52 784 ..., 52 786 ...									● 1st choice ○ suitable		
	Ø DC (mm) =											
	16			18			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)									Emulsion	Compressed air	MMS
P.1.1	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
P.1.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.3	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.4	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.5	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.1	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.3	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.2.4	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.3.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.2	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.3	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.4.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
P.4.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.1.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.2.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.3.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
K.1.1	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.1.2	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.2.1	0,19	0,16	0,12	0,20	0,17	0,13	0,25	0,22	0,18		●	
K.2.2	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15		●	
K.3.1	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
K.3.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
N.3.2	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.3.3	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.4.1												
S.1.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.1.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.2.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.3	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.3.1	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
S.3.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
S.3.3	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
H.1.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10		●	
H.1.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09		●	
H.1.3												
H.1.4												
H.2.1	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11		●	
H.3.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10		●	
O.1.1	0,38	0,31	0,24	0,41	0,35	0,27	0,43	0,38	0,30	●		○
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – MonsterMill – ICR– End mill, extra long

Index	Emulsion	Compressed air	MMS	Type extra long		52 784 ...															
						Ø DC (mm) =															
						3			4			5			6			8		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)															
P.1.1	120	110		1,0	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	0,10	0,08	0,06
P.1.2	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.1.3	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.1.4	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.1.5	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.2.1	100	90		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.2.2	100	90		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.2.3	70	70		1,0	0,5	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
P.2.4	70	70		1,0	0,5	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
P.3.1	70	70		1,0	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
P.3.2	70	70		1,0	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
P.3.3	85	90		1,0	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
P.4.1	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
P.4.2	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
M.1.1	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
M.2.1	70			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
M.3.1	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
K.1.1		150		1,0	0,5	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053	0,13	0,10	0,07
K.1.2		140		1,0	0,5	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053	0,13	0,10	0,07
K.2.1		150		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
K.2.2		140		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
K.3.1		105		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
K.3.2		105		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	240	240		1,0	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,741	0,572	0,413	0,10	0,08	0,06
N.3.2	190	190		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
N.3.3	190	190		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
N.4.1																					
S.1.1	38			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
S.1.2	38			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
S.2.1	23			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
S.2.2	27			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
S.2.3	23			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
S.3.1	70			0,5	0,25	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
S.3.2	50			0,5	0,25	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
S.3.3	50			0,5	0,25	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
H.1.1		70		0,5*		0,027	0,021		0,036	0,028		0,045	0,035		0,054	0,042		0,07	0,06	
H.1.2		50		0,5*		0,025	0,019		0,031	0,024		0,040	0,031		0,047	0,036		0,06	0,05	
H.1.3																					
H.1.4																					
H.2.1		70		0,5*		0,031	0,024		0,040	0,031		0,052	0,040		0,061	0,047		0,08	0,06	
H.3.1		70		0,5*		0,027	0,021		0,036	0,028		0,045	0,035		0,054	0,042		0,07	0,06	
O.1.1	250	250		1,0	0,5	0,058	0,045	0,033	0,108	0,083	0,060	0,135	0,104	0,075	0,162	0,125	0,090	0,22	0,17	0,12
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

*= Edge Milling and Trochoidal Milling

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/
No. of teeth 4 = 4°/No. of teeth 5 = 3°

Index	52 784 ... Ø DC (mm) = 10			12			14			16			18			20			● 1st choice ○ suitable		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
P.1.2	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.3	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.4	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.5	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.1	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.2	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.3	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.2.4	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.3.1	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.2	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.3	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.4.1	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
P.4.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.1.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.2.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.3.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
K.1.1	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.1.2	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.2.1	0,14	0,10	0,08	0,14	0,11	0,08	0,19	0,15	0,11	0,19	0,16	0,12	0,20	0,17	0,13	0,25	0,22	0,18		●	
K.2.2	0,12	0,09	0,07	0,14	0,11	0,08	0,19	0,15	0,11	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15		●	
K.3.1	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
K.3.2	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
N.3.2	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.3.3	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.4.1																					
S.1.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.1.2	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.1	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.2.2	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.3	0,09	0,07	0,05	0,11	0,05	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.3.1	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
S.3.2	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
S.3.3	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
H.1.1	0,09	0,07		0,11	0,08		0,13	0,10		0,13	0,10		0,14	0,12		0,14	0,13			●	
H.1.2	0,08	0,06		0,09	0,07		0,11	0,09		0,11	0,09		0,12	0,10		0,13	0,11			●	
H.1.3																					
H.1.4																					
H.2.1	0,10	0,08		0,12	0,09		0,14	0,11		0,14	0,12		0,16	0,13		0,16	0,14			●	
H.3.1	0,09	0,07		0,11	0,08		0,13	0,10		0,13	0,10		0,14	0,12		0,14	0,13			●	
O.1.1	0,27	0,21	0,15	0,32	0,25	0,18	0,38	0,29	0,21	0,38	0,31	0,24	0,41	0,35	0,27	0,43	0,38	0,30	●		○
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – MonsterMill – TCR – End mill

Index	Type long	Type extra long	Type long	Type extra long	52 504 ..., 52 508 ...											
					Ø DC (mm) =											
					4			5			6			8		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC		f_z (mm)											
P.4.1	110	88	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
P.4.2	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
M.1.1	110	88	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
M.2.1	80	64	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
M.3.1	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1	**80**	**96**	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
S.3.2	**70**	**80**	1,0	0,5	0,020	0,015	0,010	0,030	0,022	0,014	0,040	0,029	0,019	0,048	0,035	0,022
S.3.3	**60**	**64**	1,0	0,5	0,150	0,010	0,008	0,025	0,018	0,010	0,035	0,025	0,015	0,040	0,030	0,018

Cutting data standard values – MonsterMill – TCR – End mill

Index	Type long	Type long	52 506 ...											
			Ø DC (mm) =											
			4		5		6		8		10		12	
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.4.1	110	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
P.4.2	100	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
M.1.1	110	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
M.2.1	80	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
M.3.1	100	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	**80**	**1,0**	0,022	0,017	0,032	0,024	0,042	0,031	0,050	0,037	0,064	0,048	0,080	0,060
S.3.2	**70**	**1,0**	0,020	0,015	0,030	0,022	0,040	0,029	0,048	0,035	0,062	0,046	0,078	0,058
S.3.3	**60**	**1,0**	0,150	0,010	0,025	0,018	0,035	0,025	0,040	0,030	0,055	0,035	0,070	0,050

Index	52 504 ..., 52 508 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.4.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
P.4.2	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
M.1.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
M.2.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
M.3.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,045	0,111	0,090	0,070	●		
S.3.2	0,062	0,046	0,030	0,078	0,058	0,038	0,083	0,063	0,043	0,109	0,088	0,068	●		
S.3.3	0,055	0,035	0,025	0,070	0,050	0,030	0,075	0,055	0,035	0,100	0,080	0,060	●		

Index	52 506 ...				● 1st choice ○ suitable		
	Ø DC (mm) =						
	16		20				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	f_z (mm)						
P.4.1	0,085	0,065	0,111	0,09	●	○	
P.4.2	0,085	0,065	0,111	0,09	●	○	
M.1.1	0,085	0,065	0,111	0,09	●	○	
M.2.1	0,085	0,065	0,111	0,09	●	○	
M.3.1	0,085	0,065	0,111	0,09	●	○	
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1	0,085	0,065	0,111	0,090	●		
S.3.2	0,083	0,063	0,109	0,088	●		
S.3.3	0,075	0,055	0,100	0,080	●		

Cutting data standard values – MonsterMill – TCR– Ball-nosed end mill

Index	Type long	Type extra long		52 514 ...											
				Ø DC (mm) =											
				2		3		4		5		6		8	
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)											
P.4.1	110	65	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
P.4.2	100	60	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
M.1.1	110	65	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
M.2.1	80	55	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
M.3.1	100	60	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	80	60	0,1 - 0,2	0,017	0,013	0,02	0,014	0,022	0,017	0,022	0,017	0,034	0,025	0,053	0,042
S.3.2	70	50	0,1 - 0,2	0,014	0,011	0,017	0,012	0,019	0,014	0,019	0,014	0,029	0,022	0,046	0,036
S.3.3	60	40	0,1 - 0,2	0,012	0,009	0,014	0,01	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,03

Cutting data standard values – MonsterMill – TCR – Torus face cutter

● 1st choice
○ suitable

Index	Type long	Type extra long		52 512 ...									Emulsion	Compressed air	MMS
				Ø DC (mm) =											
				2	3	4	5	6	8	10	12	16			
				a_e 0,1–1,0 x DC											
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)											
P.4.1	120	110	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
P.4.2	110	100	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
M.1.1	120	110	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
M.2.1	100	90	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
M.3.1	110	100	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	130	120	0,06	0,025	0,040	0,060	0,070	0,090	0,11	0,13	0,18	0,22	●		
S.3.2	110	100	0,06	0,020	0,035	0,055	0,065	0,085	0,10	0,12	0,16	0,20	●		
S.3.3	90	80	0,06	0,015	0,030	0,050	0,060	0,080	0,09	0,11	0,15	0,18	●		

Index	52 514 ...						● 1st choice ○ suitable		
	Ø DC (mm) =								
	10		12		16				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	f_z (mm)								
P.4.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
P.4.2	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
M.1.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
M.2.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
M.3.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1	0,059	0,046	0,066	0,056	0,073	0,063	●		
S.3.2	0,05	0,04	0,056	0,048	0,062	0,054	●		
S.3.3	0,042	0,033	0,047	0,04	0,052	0,045	●		

Cutting data standard values – MonsterMill – NCR – End mill, long

Index	ZEFP = 4			Type long	53 030 ...											
					Ø DC (mm) =											
					4			5			6			8		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC	f_z (mm)											
M.1.1	120	100	70	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
M.2.1	100	80	60	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
M.3.1	120	100	70	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.1.1	**50**	**40**	**30**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.1.2	**50**	**40**	**30**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.2.1	**35**	**30**	**25**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.2.2	**35**	**30**	**25**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.2.3	**35**	**30**	**25**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.3.1	**120**	**100**	**80**	1,0	0,04	0,03	0,02	0,05	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04
S.3.2	**100**	**80**	**60**	1,0	0,04	0,03	0,02	0,05	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04
S.3.3	**80**	**70**	**60**	1,0	0,04	0,03	0,02	0,05	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04

Plunging angle for ramping and helical milling: 3°

Index	ZEFP = 5	Type long	53 031 ...												● 1st choice ○ suitable		
			Ø DC (mm) =														
			6		8		10		12		16		20		Emulsion	Compressed air	MMS
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)														
M.1.1	100	1,5	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		○
M.2.1	80	1,5	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		○
M.3.1	100	1,5	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		○
S.1.1	**40**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.1.2	**40**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.2.1	**35**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.2.2	**35**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.2.3	**35**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.3.1	**100**	**1,5**	**0,05**	0,04	0,06	0,05	0,08	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		
S.3.2	**80**	**1,5**	**0,05**	0,04	0,06	0,05	0,08	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		
S.3.3	**70**	**1,5**	**0,05**	0,04	0,06	0,05	0,08	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		

Plunging angle for ramping and helical milling = 1°

Index	53 030 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
M.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		○
M.2.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		○
M.3.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		○
S.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.1.2	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.2.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.2.2	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.2.3	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.3.1	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,16	0,12	0,08	●		
S.3.2	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,16	0,12	0,08	●		
S.3.3	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,16	0,12	0,08	●		

Cutting data standard values – MonsterMill – NCR– End mill, extra long

Index	ZEFP = 4		Type extra long	53 030 ...											
				Ø DC (mm) =											
				4		5		6		8		10		12	
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)											
M.1.1	100	80	1,0	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
M.2.1	90	70	1,0	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
M.3.1	100	80	1,0	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.1.1	**50**	**40**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.1.2	**50**	**40**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.2.1	**35**	**30**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.2.2	**35**	**30**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.2.3	**35**	**30**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.3.1	**100**	**80**	**1,0**	0,04	0,03	0,05	0,04	0,05	0,04	0,07	0,06	0,09	0,07	0,11	0,08
S.3.2	**80**	**70**	**1,0**	0,04	0,03	0,05	0,04	0,05	0,04	0,07	0,06	0,09	0,07	0,11	0,08
S.3.3	**70**	**60**	**1,0**	0,04	0,03	0,05	0,04	0,05	0,04	0,07	0,06	0,09	0,07	0,11	0,08

Plunging angle for ramping and helical milling: 3°

Cutting data standard values – MonsterMill – NCR – ball-nosed end mill

Index	Type long	Type extra long	$a_{p\,max.}$ x DC	53 032 ... / 53 033 ...											
				Ø DC (mm) =											
				2		3		4		5		6		8	
				a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC
	v_c (m/min)			f_z (mm)											
M.1.1	120	90	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
M.2.1	100	80	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
M.3.1	120	90	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
S.1.1	**60**	**50**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.1.2	**60**	**50**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.2.1	**50**	**40**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.2.2	**50**	**40**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.2.3	**50**	**40**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.3.1	100	80	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
S.3.2	90	70	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
S.3.3	90	70	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05

Index	53 030 ... Ø DC (mm) = 16 a_e 0,1–0,2 x DC	16 a_e 0,3–0,4 x DC	20 a_e 0,1–0,2 x DC	20 a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	f_z (mm)				● 1st choice ○ suitable		
M.1.1	0,12	0,09	0,14	0,10	●		○
M.2.1	0,12	0,09	0,14	0,10	●		○
M.3.1	0,12	0,09	0,14	0,10	●		○
S.1.1	0,12	0,09	0,14	0,10	●		
S.1.2	0,12	0,09	0,14	0,10	●		
S.2.1	0,12	0,09	0,14	0,10	●		
S.2.2	0,12	0,09	0,14	0,10	●		
S.2.3	0,12	0,09	0,14	0,10	●		
S.3.1	0,13	0,10	0,16	0,12	●		
S.3.2	0,13	0,10	0,16	0,12	●		
S.3.3	0,13	0,10	0,16	0,12	●		

Index	53 032 ... / 53 033 ... Ø DC (mm) = 10 a_e 0,01–0,02 x DC	10 a_e 0,03–0,05 x DC	12 a_e 0,01–0,02 x DC	12 a_e 0,03–0,05 x DC	16 a_e 0,01–0,02 x DC	16 a_e 0,03–0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)						● 1st choice ○ suitable		
M.1.1	0.08	0.06	0.09	0.07	0.12	0.1	●		○
M.2.1	0.08	0.06	0.09	0.07	0.12	0.1	●		○
M.3.1	0.08	0.06	0.09	0.07	0.12	0.1	●		○
S.1.1	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.1.2	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.2.1	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.2.2	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.2.3	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.3.1	0.08	0.06	0.09	0.07	0.12	0.1	●		
S.3.2	0.08	0.06	0.09	0.07	0.12	0.1	●		
S.3.3	0.08	0.06	0.09	0.07	0.12	0.1	●		

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 2,5 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Peripheral milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
P.2.3	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
P.3.3	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
H.1.1	170	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
H.1.2	160	1,0	0,005	0,005	0,010	0,010	0,014	0,014	0,019	0,024	0,029	0,034
H.1.3	150	1,0	0,004	0,004	0,008	0,008	0,012	0,012	0,016	0,020	0,024	0,028
H.1.4	110	1,0	0,003	0,003	0,006	0,006	0,010	0,010	0,013	0,016	0,019	0,022

Index	$T_x \leq 2,5 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Z-layer milling / face milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.2.3	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.3.3	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.1	110	0,05	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.2	100	0,05	0,002	0,002	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017
H.1.3	80	0,03	0,002	0,002	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,014
H.1.4	60	0,03	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011

Index	$T_x \leq 2,5 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Full slot		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.2.3	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.3.3	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.1	55	0,05	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.2	45	0,05	0,001	0,001	0,003	0,003	0,004	0,005	0,006	0,007	0,008	0,010
H.1.3												
H.1.4												

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
P.2.3	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
P.3.3	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
H.1.1	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
H.1.2	0,043	0,048	0,067	0,101	0,134	0,168	0,192	○	●	●
H.1.3	0,036	0,040	0,056	0,084	0,112	0,140	0,160	○	●	●
H.1.4	0,029	0,032	0,045	0,067	0,090	0,112	0,128	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.2.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.3.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.1	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.2	0,022	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●
H.1.3	0,018	0,020	0,028	0,042	0,056	0,070	0,080	○	●	●
H.1.4	0,014	0,016	0,022	0,034	0,045	0,056	0,064	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
P.2.3	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
P.3.3	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
H.1.1	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
H.1.2	0,012	0,015	0,020	0,030	0,033	0,035	0,040	○	●	●
H.1.3										
H.1.4										

14

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 2,6–5,0 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Peripheral milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
P.2.3	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
P.3.3	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
H.1.1	119	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
H.1.2	112	1,0	0,004	0,004	0,007	0,007	0,011	0,011	0,014	0,018	0,022	0,025
H.1.3	105	1,0	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.4	77	1,0	0,002	0,002	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017

Index	$T_x \leq 2,6–5,0 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Z-layer milling / face milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,03 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
P.2.3	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
P.3.3	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
H.1.1	77	0,05	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
H.1.2	70	0,05	0,002	0,002	0,004	0,004	0,005	0,005	0,007	0,009	0,011	0,013
H.1.3	56	0,03	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.4	60	0,03	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011

Index	$T_x \leq 2,6–5,0 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Full slot		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 1,0 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.2.3	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.3.3	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.1	39	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.2	32	0,05	0,001	0,001	0,002	0,002	0,003	0,003	0,004	0,005	0,006	0,007
H.1.3												
H.1.4												

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
P.2.3	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
P.3.3	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
H.1.1	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
H.1.2	0,032	0,036	0,050	0,076	0,101	0,126	0,144	○	●	●
H.1.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.4	0,022	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,03 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
P.2.3	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
P.3.3	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
H.1.1	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
H.1.2	0,016	0,018	0,025	0,038	0,050	0,063	0,072	○	●	●
H.1.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.4	0,011	0,012	0,017	0,025	0,034	0,042	0,048	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 1,0 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.2.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.3.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.1	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.2	0,009	0,010	0,014	0,021	0,028	0,035	0,040	○	●	●
H.1.3										
H.1.4										

14

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 5{,}1–10{,}0 \times DC$		53 603 ..., 53 604 ...									
	Peripheral milling		Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.2.3	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.3.3	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.1	94	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.2	88	0,75	0,002	0,002	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017
H.1.3	83	0,75	0,002	0,002	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,014
H.1.4	61	0,75	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011

Index	$T_x \leq 5{,}1–10{,}0 \times DC$		53 603 ..., 53 604 ...									
	Z-layer milling / face milling		Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,3 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.2.3	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.3.3	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.1	61	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.2	55	0,05	0,001	0,001	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008
H.1.3	44	0,03	0,001	0,001	0,002	0,002	0,003	0,003	0,004	0,005	0,006	0,007
H.1.4	33	0,03	0,001	0,001	0,002	0,002	0,002	0,002	0,003	0,004	0,005	0,006

● 1st choice
○ suitable

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		53 603 ..., 53 604 ...												
	Peripheral milling		Ø DC (mm) =												
			0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2	2,5	3	4	Emulsion	Compressed air	MMS
			a_e 0,05 x DC													
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)													
P.1.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.2.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.3.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.1	77	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.2	72	0,5	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,013	0,017	0,019	0,027	○	●	●
H.1.3	68	0,5	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011	0,014	0,016	0,022	○	●	●
H.1.4	50	0,5	0,003	0,003	0,004	0,004	0,005	0,006	0,008	0,009	0,012	0,013	0,018	○	●	●

● 1st choice
○ suitable

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		53 603 ..., 53 604 ...												
	Z-layer milling / face milling		Ø DC (mm) =												
			0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2	2,5	3	4	Emulsion	Compressed air	MMS
			a_e 0,3 x DC													
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)													
P.1.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.2.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.3.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.1	77	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.2	72	0,5	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,013	0,017	0,019	0,027	○	●	●
H.1.3	68	0,5	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011	0,014	0,016	0,022	○	●	●
H.1.4	50	0,5	0,003	0,003	0,004	0,004	0,005	0,006	0,008	0,009	0,012	0,013	0,018	○	●	●

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.2.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.3.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.1	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.2	0,022	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●
H.1.3	0,018	0,020	0,028	0,042	0,056	0,070	0,080	○	●	●
H.1.4	0,014	0,016	0,022	0,034	0,045	0,056	0,064	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,3 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.2.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.3.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.1	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.2	0,011	0,012	0,017	0,025	0,034	0,042	0,048	○	●	●
H.1.3	0,009	0,010	0,014	0,021	0,028	0,035	0,040	○	●	●
H.1.4	0,007	0,008	0,011	0,017	0,022	0,028	0,032	○	●	●

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 2 \times DC$		53 605 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Peripheral milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
P.2.3	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
P.3.3	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
H.1.1	160	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
H.1.2	130	2,0	0,014	0,022	0,030	0,041	0,060	0,074	0,096	0,108	○	●	●
H.1.3	120	2,0	0,012	0,018	0,025	0,034	0,050	0,062	0,080	0,090	○	●	●
H.1.4	110	2,0	0,010	0,014	0,020	0,027	0,040	0,050	0,064	0,072	○	●	●

Index	$T_x \leq 2 \times DC$		53 605 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Face milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.2.3	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.3.3	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.1	110	0,05	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.2	90	0,05	0,012	0,017	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●
H.1.3	75	0,03	0,010	0,014	0,020	0,028	0,042	0,056	0,070	0,080	○	●	●
H.1.4	60	0,03	0,008	0,011	0,016	0,022	0,034	0,045	0,056	0,064	○	●	●

Index	$T_x \leq 3 \times DC$		53 606 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Peripheral milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,04 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
P.2.3	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
P.3.3	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
H.1.1	119	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
H.1.2	112	2,0	0,011	0,019	0,026	0,036	0,053	0,066	0,084	0,096	○	●	●
H.1.3	105	2,0	0,009	0,016	0,022	0,030	0,044	0,055	0,070	0,080	○	●	●
H.1.4	77	2,0	0,007	0,013	0,018	0,024	0,035	0,044	0,056	0,064	○	●	●

Index	$T_x \leq 3 \times DC$		53 606 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Face milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,04 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
P.2.3	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
P.3.3	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
H.1.1	84	0,05	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
H.1.2	77	0,05	0,007	0,011	0,018	0,029	0,043	0,058	0,072	0,084	○	●	●
H.1.3	63	0,03	0,006	0,009	0,015	0,024	0,036	0,048	0,060	0,070	○	●	●
H.1.4	42	0,03	0,005	0,007	0,012	0,019	0,029	0,038	0,048	0,056	○	●	●

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Cutting data standard values – MonsterMill – HCR– Ball-nosed end mill

Index	$T_x \leq 2,5 \times DC$		53 602 ...						● 1st choice ○ suitable		
			Ø DC (mm) =								
			3	4	6	8	10	12			
			a_e 0,05 x DC								
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
P.2.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
P.3.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
H.1.1	180	0,05	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
H.1.2	160	0,05	0,030	0,040	0,060	0,081	0,101	0,121	○	●	●
H.1.3	150	0,03	0,025	0,034	0,050	0,067	0,084	0,101	○	●	●
H.1.4	130	0,03	0,020	0,027	0,040	0,054	0,067	0,081	○	●	●

Index	$T_x \leq 2,6–5,0 \times DC$		53 602 ...						● 1st choice ○ suitable		
			Ø DC (mm) =								
			3	4	6	8	10	12			
			a_e 0,05 x DC								
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
P.2.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
P.3.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
H.1.1	180	0,05	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
H.1.2	160	0,05	0,030	0,040	0,060	0,081	0,101	0,121	○	●	●
H.1.3	150	0,03	0,025	0,034	0,050	0,067	0,084	0,101	○	●	●
H.1.4	130	0,03	0,020	0,027	0,040	0,054	0,067	0,081	○	●	●

Index	$T_x \leq 5,1–10,0 \times DC$		53 602 ...						● 1st choice ○ suitable		
			Ø DC (mm) =								
			3	4	6	8	10	12			
			a_e 0,04 x DC								
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.3	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
P.2.3	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
P.3.3	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
H.1.1	81	0,04	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
H.1.2	72	0,04	0,018	0,024	0,024	0,036	0,048	0,060	○	●	●
H.1.3	68	0,02	0,015	0,020	0,020	0,030	0,040	0,050	○	●	●
H.1.4	59	0,02	0,012	0,016	0,016	0,024	0,032	0,040	○	●	●

14

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Cutting data standard values – MonsterMill – HCR– Ball-nosed end mill

Index	$T_x \leq 2,5 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
P.2.3	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
P.3.3	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
H.1.1	180	0,05	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
H.1.2	160	0,05	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
H.1.3	150	0,03	0,002	0,004	0,005	0,007	0,010	0,012	0,014	0,018	0,022	0,024
H.1.4	130	0,03	0,002	0,003	0,004	0,006	0,008	0,010	0,011	0,014	0,018	0,019

Index	$T_x \leq 2,6–5,0 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
P.2.3	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
P.3.3	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
H.1.1	108	0,05	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
H.1.2	96	0,05	0,002	0,004	0,005	0,007	0,010	0,011	0,014	0,017	0,020	0,023
H.1.3	90	0,03	0,002	0,003	0,004	0,006	0,008	0,010	0,012	0,015	0,017	0,019
H.1.4	78	0,03	0,001	0,002	0,003	0,004	0,006	0,008	0,009	0,012	0,014	0,015

Index	$T_x \leq 5,1–10,0 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
P.2.3	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
P.3.3	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
H.1.1	81	0,04	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
H.1.2	72	0,04	0,001	0,002	0,004	0,005	0,007	0,008	0,011	0,013	0,014	0,017
H.1.3	68	0,02	0,001	0,002	0,003	0,004	0,006	0,007	0,009	0,011	0,012	0,014
H.1.4	59	0,02	0,001	0,002	0,002	0,003	0,005	0,006	0,007	0,009	0,010	0,011

Index	$T_x \leq 10,1–15,0 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,04 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.2.3	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.3.3	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.1	63	0,03	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.2	56	0,03	0,001	0,001	0,002	0,004	0,005	0,006	0,007	0,008	0,010	0,012
H.1.3	53	0,01	0,001	0,001	0,002	0,003	0,004	0,005	0,006	0,007	0,008	0,010
H.1.4	46	0,01	0,001	0,001	0,002	0,002	0,003	0,004	0,005	0,006	0,006	0,008

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12	Emulsion	Compressed air	MMS
	a_e 0,05 x DC									
	f_z (mm)									
P.1.3	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
P.2.3	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
P.3.3	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
H.1.1	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
H.1.2	0,036	0,043	0,058	0,086	0,115	0,144	0,173	○	●	●
H.1.3	0,030	0,036	0,048	0,072	0,096	0,120	0,144	○	●	●
H.1.4	0,024	0,029	0,038	0,058	0,077	0,096	0,115	○	●	●

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12	Emulsion	Compressed air	MMS
	a_e 0,05 x DC									
	f_z (mm)									
P.1.3	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
P.2.3	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
P.3.3	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
H.1.1	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
H.1.2	0,029	0,035	0,046	0,060	0,084	0,107	0,130	○	●	●
H.1.3	0,024	0,029	0,039	0,050	0,070	0,089	0,108	○	●	●
H.1.4	0,019	0,023	0,031	0,040	0,056	0,071	0,086	○	●	●

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12	Emulsion	Compressed air	MMS
	a_e 0,05 x DC									
	f_z (mm)									
P.1.3	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
P.2.3	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
P.3.3	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
H.1.1	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
H.1.2	0,022	0,026	0,035	0,035	0,052	0,069	0,086	○	●	●
H.1.3	0,018	0,022	0,029	0,029	0,043	0,058	0,072	○	●	●
H.1.4	0,014	0,018	0,023	0,023	0,035	0,046	0,058	○	●	●

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12	Emulsion	Compressed air	MMS
	a_e 0,04 x DC		a_e 0,05 x DC							
	f_z (mm)									
P.1.3	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
P.2.3	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
P.3.3	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
H.1.1	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
H.1.2	0,017	0,022	0,028	0,028	0,041	0,055	0,069	○	●	●
H.1.3	0,014	0,018	0,023	0,023	0,035	0,046	0,058	○	●	●
H.1.4	0,011	0,014	0,019	0,018	0,028	0,037	0,046	○	●	●

Cutting data standard values – MonsterMill – PCR – End mill, UNI version

Index	Short / long / extra long version		52 613 ..., 52 614 ..., 52 615 ..., 52 619 ...																				
			Ø DC (mm) =																				
			5,0			5,7–6,0			6,7–7,0			7,7–8,0			8,7–9,0			9,7–10,0			11,7–12,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																				
P.1.1	240	1,0	0,096	0,068	0,043	0,107	0,075	0,048	0,122	0,086	0,054	0,136	0,096	0,061	0,150	0,106	0,067	0,163	0,115	0,073	0,188	0,133	0,084
P.1.2	230	1,0	0,092	0,065	0,041	0,102	0,072	0,046	0,116	0,082	0,052	0,130	0,092	0,058	0,143	0,101	0,064	0,156	0,110	0,070	0,179	0,127	0,080
P.1.3	220	1,0	0,087	0,062	0,039	0,097	0,069	0,043	0,111	0,078	0,050	0,124	0,088	0,055	0,136	0,096	0,061	0,148	0,105	0,066	0,171	0,121	0,076
P.1.4	205	1,0	0,083	0,059	0,037	0,092	0,065	0,041	0,105	0,074	0,047	0,118	0,083	0,053	0,130	0,092	0,058	0,141	0,100	0,063	0,162	0,115	0,072
P.1.5	195	1,0	0,079	0,056	0,035	0,087	0,062	0,039	0,100	0,070	0,045	0,111	0,079	0,050	0,123	0,087	0,055	0,134	0,094	0,060	0,153	0,109	0,069
P.2.1	220	1,0	0,096	0,068	0,043	0,107	0,075	0,048	0,122	0,086	0,054	0,136	0,096	0,061	0,150	0,106	0,067	0,163	0,115	0,073	0,188	0,133	0,084
P.2.2	200	1,0	0,087	0,062	0,039	0,097	0,069	0,043	0,111	0,078	0,050	0,124	0,088	0,055	0,136	0,096	0,061	0,148	0,105	0,066	0,171	0,121	0,076
P.2.3	180	1,0	0,079	0,056	0,035	0,087	0,062	0,039	0,100	0,070	0,045	0,111	0,079	0,050	0,123	0,087	0,055	0,134	0,094	0,060	0,153	0,109	0,069
P.2.4	140	1,0	0,073	0,051	0,033	0,081	0,057	0,036	0,092	0,065	0,041	0,103	0,073	0,046	0,114	0,080	0,051	0,124	0,087	0,055	0,142	0,100	0,064
P.3.1	130	1,0	0,084	0,060	0,038	0,094	0,066	0,042	0,107	0,076	0,048	0,120	0,085	0,054	0,132	0,093	0,059	0,143	0,101	0,064	0,165	0,117	0,074
P.3.2	120	1,0	0,080	0,057	0,036	0,089	0,063	0,040	0,101	0,072	0,045	0,114	0,080	0,051	0,125	0,088	0,056	0,136	0,096	0,061	0,156	0,111	0,070
P.3.3	110	1,0	0,076	0,053	0,034	0,084	0,059	0,038	0,096	0,068	0,043	0,107	0,076	0,048	0,118	0,084	0,053	0,129	0,091	0,058	0,148	0,104	0,066
P.4.1	90	1,0	0,058	0,041	0,026	0,065	0,046	0,029	0,074	0,052	0,033	0,083	0,058	0,037	0,091	0,064	0,041	0,099	0,070	0,044	0,114	0,080	0,051
P.4.2	90	1,0	0,058	0,041	0,026	0,065	0,046	0,029	0,074	0,052	0,033	0,083	0,058	0,037	0,091	0,064	0,041	0,099	0,070	0,044	0,114	0,080	0,051
M.1.1	60	1,0	0,051	0,036	0,023	0,057	0,040	0,025	0,065	0,046	0,029	0,072	0,051	0,032	0,080	0,056	0,036	0,087	0,061	0,039	0,099	0,070	0,044
M.2.1	55	1,0	0,042	0,030	0,019	0,047	0,033	0,021	0,054	0,038	0,024	0,060	0,042	0,027	0,066	0,047	0,029	0,072	0,051	0,032	0,082	0,058	0,037
M.3.1	60	1,0	0,044	0,031	0,020	0,048	0,034	0,022	0,055	0,039	0,025	0,062	0,044	0,028	0,068	0,048	0,031	0,074	0,052	0,033	0,085	0,060	0,038
K.1.1	240	1,0	0,145	0,103	0,065	0,162	0,114	0,072	0,185	0,130	0,083	0,206	0,146	0,092	0,227	0,161	0,102	0,247	0,175	0,111	0,284	0,201	0,127
K.1.2	180	1,0	0,102	0,072	0,046	0,113	0,080	0,051	0,129	0,091	0,058	0,145	0,102	0,065	0,159	0,113	0,071	0,173	0,122	0,077	0,199	0,141	0,089
K.2.1	220	1,0	0,124	0,087	0,055	0,137	0,097	0,061	0,157	0,111	0,070	0,175	0,124	0,078	0,193	0,137	0,086	0,210	0,149	0,094	0,242	0,171	0,108
K.2.2	180	1,0	0,102	0,072	0,046	0,113	0,080	0,051	0,129	0,091	0,058	0,145	0,102	0,065	0,159	0,113	0,071	0,173	0,122	0,077	0,199	0,141	0,089
K.3.1	160	1,0	0,102	0,072	0,046	0,113	0,080	0,051	0,129	0,091	0,058	0,145	0,102	0,065	0,159	0,113	0,071	0,173	0,122	0,077	0,199	0,141	0,089
K.3.2	150	1,0	0,087	0,062	0,039	0,097	0,069	0,043	0,111	0,078	0,050	0,124	0,088	0,055	0,136	0,096	0,061	0,148	0,105	0,066	0,171	0,121	0,076
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1																							
N.3.2																							
N.3.3																							
N.4.1																							
S.1.1																							
S.1.2																							
S.2.1																							
S.2.2																							
S.2.3																							
S.3.1																							
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Index	52 613 ..., 52 614 ..., 52 615 ..., 52 619 ...															● 1st choice ○ suitable		
	Ø DC (mm) =									Ramping	Helical milling			Drilling				
	13,7–14,0			15,5–16,0			17,5–20,0			1,0 x DC		Hole diameter		1,0 x DC				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Max. plunging angle	$\alpha_{R\,max.}$*	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	f_z Factor		Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,209	0,148	0,094	0,229	0,162	0,102	0,262	0,185	0,117	45	0,75 x DC	25°	16°	0,9		○	●	○
P.1.2	0,200	0,141	0,089	0,219	0,155	0,098	0,250	0,177	0,112	45	0,75 x DC	25°	16°	0,9		○	●	○
P.1.3	0,190	0,135	0,085	0,208	0,147	0,093	0,238	0,168	0,107	45	0,75 x DC	25°	16°	0,9		○	●	○
P.1.4	0,181	0,128	0,081	0,198	0,140	0,088	0,226	0,160	0,101	45	0,75 x DC	25°	16°	0,9		○	●	○
P.1.5	0,171	0,121	0,077	0,187	0,133	0,084	0,214	0,152	0,096	45	0,75 x DC	25°	16°	0,9		○	●	○
P.2.1	0,209	0,148	0,094	0,229	0,162	0,102	0,262	0,185	0,117	45	0,75 x DC	25°	16°	0,8		○	●	○
P.2.2	0,190	0,135	0,085	0,208	0,147	0,093	0,238	0,168	0,107	45	0,75 x DC	25°	16°	0,8		○	●	○
P.2.3	0,171	0,121	0,077	0,187	0,133	0,084	0,214	0,152	0,096	45	0,75 x DC	25°	16°	0,8		○	●	○
P.2.4	0,159	0,112	0,071	0,174	0,123	0,078	0,198	0,140	0,089	45	0,75 x DC	25°	16°	0,7		○	●	○
P.3.1	0,184	0,130	0,082	0,201	0,142	0,090	0,230	0,163	0,103	30	0,5 x DC	18°	11°	0,8		●		○
P.3.2	0,175	0,123	0,078	0,191	0,135	0,085	0,218	0,154	0,098	30	0,5 x DC	18°	11°	0,7		●		○
P.3.3	0,165	0,117	0,074	0,181	0,128	0,081	0,206	0,146	0,092	30	0,5 x DC	18°	11°	0,7		●		○
P.4.1	0,127	0,090	0,057	0,139	0,098	0,062	0,159	0,112	0,071	15	0,5 x DC	18°	11°			●		○
P.4.2	0,127	0,090	0,057	0,139	0,098	0,062	0,159	0,112	0,071	15	0,5 x DC	18°	11°			●		○
M.1.1	0,111	0,079	0,050	0,122	0,086	0,054	0,139	0,098	0,062	15	0,5 x DC	18°	11°			●		
M.2.1	0,092	0,065	0,041	0,101	0,071	0,045	0,115	0,081	0,051	15	0,5 x DC	18°	11°			●		
M.3.1	0,095	0,067	0,043	0,104	0,074	0,047	0,119	0,084	0,053	15	0,5 x DC	18°	11°			●		
K.1.1	0,317	0,224	0,142	0,347	0,245	0,155	0,397	0,281	0,178	45	0,75 x DC	25°	16°	0,8			●	
K.1.2	0,222	0,157	0,099	0,243	0,172	0,109	0,278	0,196	0,124	45	0,75 x DC	25°	16°	0,8			●	
K.2.1	0,270	0,191	0,121	0,295	0,209	0,132	0,337	0,239	0,151	45	0,75 x DC	25°	16°	0,8			●	
K.2.2	0,222	0,157	0,099	0,243	0,172	0,109	0,278	0,196	0,124	45	0,75 x DC	25°	16°	0,8			●	
K.3.1	0,222	0,157	0,099	0,243	0,172	0,109	0,278	0,196	0,124	45	0,75 x DC	25°	16°	0,8			●	
K.3.2	0,190	0,135	0,085	0,208	0,147	0,093	0,238	0,168	0,107	45	0,75 x DC	25°	16°	0,8			●	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

* Width of cut per helical revolution

Cutting data for ramping and helical milling = 100 %
Multiply cutting data for drilling by the factor from the table

Cutting data standard values – MonsterMill – PCR – End mill, UNI version – trochoidal milling

Index	Type long		52 619																			
			Ø DC (mm) =																			
			5				6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	505	46°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,038	0,19	0,14	0,11	0,043
P.1.2	480	46°	0,09	0,06	0,05	0,020	0,11	0,07	0,06	0,024	0,13	0,10	0,08	0,030	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,041
P.1.3	460	46°	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,029	0,15	0,11	0,09	0,034	0,18	0,12	0,10	0,039
P.1.4	435	46°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,021	0,12	0,09	0,07	0,027	0,15	0,10	0,08	0,033	0,17	0,12	0,10	0,038
P.1.5	415	46°	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,020	0,12	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,036
P.2.1	460	46°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,038	0,19	0,14	0,11	0,043
P.2.2	415	46°	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,029	0,15	0,11	0,09	0,034	0,18	0,12	0,10	0,039
P.2.3	375	46°	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,020	0,12	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,036
P.2.4	290	46°	0,07	0,05	0,04	0,016	0,08	0,06	0,05	0,019	0,11	0,08	0,06	0,024	0,13	0,09	0,07	0,029	0,15	0,10	0,08	0,033
P.3.1	270	46°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,12	0,09	0,07	0,028	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,038
P.3.2	250	46°	0,08	0,06	0,05	0,018	0,09	0,07	0,05	0,021	0,12	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,036
P.3.3	230	46°	0,07	0,05	0,04	0,017	0,09	0,06	0,05	0,019	0,11	0,08	0,06	0,025	0,13	0,09	0,08	0,030	0,15	0,11	0,09	0,034
P.4.1	190	46°	0,06	0,04	0,03	0,013	0,07	0,05	0,04	0,015	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,023	0,12	0,08	0,07	0,026
P.4.2	190	46°	0,06	0,04	0,03	0,013	0,07	0,05	0,04	0,015	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,023	0,12	0,08	0,07	0,026
M.1.1	220	35°	0,05	0,03		0,011	0,06	0,04		0,013	0,08	0,05		0,018	0,10	0,06		0,022	0,12	0,07		0,027
M.2.1	200	35°	0,06	0,04		0,013	0,07	0,05		0,016	0,10	0,06		0,021	0,12	0,08		0,027	0,14	0,10		0,032
M.3.1	200	35°	0,06	0,04		0,013	0,07	0,05		0,016	0,10	0,06		0,021	0,12	0,08		0,027	0,14	0,10		0,032
K.1.1	500	46°	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,037	0,21	0,15	0,12	0,048	0,26	0,18	0,15	0,057	0,29	0,21	0,17	0,066
K.1.2	375	46°	0,10	0,07	0,06	0,022	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,033	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,046
K.2.1	460	46°	0,12	0,09	0,07	0,027	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,041	0,22	0,15	0,13	0,049	0,25	0,18	0,14	0,056
K.2.2	375	46°	0,10	0,07	0,06	0,022	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,033	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,046
K.3.1	335	46°	0,10	0,07	0,06	0,022	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,033	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,046
K.3.2	315	46°	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,029	0,15	0,11	0,09	0,034	0,18	0,12	0,10	0,039
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1																						
N.3.2																						
N.3.3																						
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Cutting depth corresponding to the cutting length

Index	52 619 .... Ø DC (mm) = 14				16				18				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1	0,22	0,15	0,13	0,049	0,24	0,17	0,14	0,053	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,061	○	●	○
P.1.2	0,21	0,15	0,12	0,046	0,23	0,16	0,13	0,051	0,24	0,17	0,14	0,054	0,26	0,18	0,15	0,058	○	●	○
P.1.3	0,20	0,14	0,11	0,044	0,22	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,17	0,14	0,055	○	●	○
P.1.4	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,046	0,22	0,16	0,13	0,049	0,23	0,17	0,14	0,052	○	●	○
P.1.5	0,18	0,13	0,10	0,040	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,047	0,22	0,16	0,13	0,050	○	●	○
P.2.1	0,22	0,15	0,13	0,049	0,24	0,17	0,14	0,053	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,061	○	●	○
P.2.2	0,20	0,14	0,11	0,044	0,22	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,17	0,14	0,055	○	●	○
P.2.3	0,18	0,13	0,10	0,040	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,047	0,22	0,16	0,13	0,050	○	●	○
P.2.4	0,16	0,12	0,09	0,037	0,18	0,13	0,10	0,040	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,046	○	●	○
P.3.1	0,19	0,13	0,11	0,043	0,21	0,15	0,12	0,047	0,22	0,16	0,13	0,050	0,24	0,17	0,14	0,053	●		○
P.3.2	0,18	0,13	0,10	0,040	0,20	0,14	0,11	0,044	0,21	0,15	0,12	0,048	0,23	0,16	0,13	0,051	●		○
P.3.3	0,17	0,12	0,10	0,038	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,048	●		○
P.4.1	0,13	0,09	0,08	0,029	0,14	0,10	0,08	0,032	0,15	0,11	0,09	0,035	0,16	0,12	0,09	0,037	●		○
P.4.2	0,13	0,09	0,08	0,029	0,14	0,10	0,08	0,032	0,15	0,11	0,09	0,035	0,16	0,12	0,09	0,037	●		○
M.1.1	0,14	0,08		0,031	0,16	0,10		0,036	0,18	0,11		0,040	0,20	0,12		0,045	●		
M.2.1	0,17	0,11		0,038	0,19	0,13		0,043	0,22	0,14		0,048	0,24	0,16		0,054	●		
M.3.1	0,17	0,11		0,038	0,19	0,13		0,043	0,22	0,14		0,048	0,24	0,16		0,054	●		
K.1.1	0,33	0,23	0,19	0,073	0,36	0,25	0,21	0,080	0,39	0,27	0,22	0,086	0,41	0,29	0,24	0,092		●	
K.1.2	0,23	0,16	0,13	0,051	0,25	0,18	0,15	0,056	0,27	0,19	0,16	0,061	0,29	0,20	0,17	0,064		●	
K.2.1	0,28	0,20	0,16	0,062	0,31	0,22	0,18	0,068	0,33	0,23	0,19	0,074	0,35	0,25	0,20	0,078		●	
K.2.2	0,23	0,16	0,13	0,051	0,25	0,18	0,15	0,056	0,27	0,19	0,16	0,061	0,29	0,20	0,17	0,064		●	
K.3.1	0,23	0,16	0,13	0,051	0,25	0,18	0,15	0,056	0,27	0,19	0,16	0,061	0,29	0,20	0,17	0,064		●	
K.3.2	0,20	0,14	0,11	0,044	0,22	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,17	0,14	0,055		●	
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1																			
N.3.2																			
N.3.3																			
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

14

Cutting data standard values – MonsterMill – PCR – End mill, AL version

Index	Type long / extra long		52 616 ..., 52 617 ..., 52 618 ...																				
			Ø DC (mm) =																				
			5,0			5,7–7,0			7,7–8,0			8,7–10,0			11,7–12,0			13,7–14,0			15,5–16,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																				
P.1.1																							
P.1.2																							
P.1.3																							
P.1.4																							
P.1.5																							
P.2.1																							
P.2.2																							
P.2.3																							
P.2.4																							
P.3.1																							
P.3.2																							
P.3.3																							
P.4.1																							
P.4.2																							
M.1.1																							
M.2.1																							
M.3.1																							
K.1.1																							
K.1.2																							
K.2.1																							
K.2.2																							
K.3.1																							
K.3.2																							
N.1.1	630	1,0	0,111	0,078	0,050	0,149	0,105	0,067	0,167	0,118	0,075	0,200	0,141	0,089	0,229	0,162	0,103	0,256	0,181	0,115	0,280	0,198	0,125
N.1.2	575	1,0	0,101	0,071	0,045	0,135	0,096	0,061	0,151	0,107	0,068	0,181	0,128	0,081	0,208	0,147	0,093	0,233	0,165	0,104	0,255	0,180	0,114
N.2.1	380	1,0	0,106	0,075	0,047	0,142	0,101	0,064	0,159	0,112	0,071	0,190	0,135	0,085	0,219	0,155	0,098	0,244	0,173	0,109	0,267	0,189	0,120
N.2.2	305	1,0	0,111	0,078	0,050	0,149	0,105	0,067	0,167	0,118	0,075	0,200	0,141	0,089	0,229	0,162	0,103	0,256	0,181	0,115	0,280	0,198	0,125
N.2.3	220	1,0	0,121	0,086	0,054	0,162	0,115	0,073	0,182	0,129	0,081	0,218	0,154	0,097	0,250	0,177	0,112	0,279	0,198	0,125	0,306	0,216	0,137
N.3.1	275	1,0	0,050	0,036	0,023	0,068	0,048	0,030	0,076	0,054	0,034	0,091	0,064	0,041	0,104	0,074	0,047	0,116	0,082	0,052	0,127	0,090	0,057
N.3.2	165	1,0	0,081	0,057	0,036	0,108	0,077	0,048	0,121	0,086	0,054	0,145	0,103	0,065	0,167	0,118	0,075	0,186	0,132	0,083	0,204	0,144	0,091
N.3.3	220	1,0	0,081	0,057	0,036	0,108	0,077	0,048	0,121	0,086	0,054	0,145	0,103	0,065	0,167	0,118	0,075	0,186	0,132	0,083	0,204	0,144	0,091
N.4.1																							
S.1.1																							
S.1.2																							
S.2.1																							
S.2.2																							
S.2.3																							
S.3.1																							
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Index	52 616 ..., 52 617 ..., 52 618 ...											● 1st choice ○ suitable		
	Ø DC (mm) =						Ramping	Helical milling			Drilling			
	17,5–18,0			19,5–20,0			1,0 x DC		Hole diameter		1,0 x DC			
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Max. plunging angle	$\alpha_{R\,max.}$*	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	f_z Factor	Emulsion	Compressed air	MMS
	f_z (mm)													
P.1.1														
P.1.2														
P.1.3														
P.1.4														
P.1.5														
P.2.1														
P.2.2														
P.2.3														
P.2.4														
P.3.1														
P.3.2														
P.3.3														
P.4.1														
P.4.2														
M.1.1														
M.2.1														
M.3.1														
K.1.1														
K.1.2														
K.2.1														
K.2.2														
K.3.1														
K.3.2														
N.1.1	0,301	0,213	0,135	0,320	0,226	0,143	45°	0,75 x DC	25°	16°	0,8	●		
N.1.2	0,274	0,194	0,123	0,291	0,206	0,130	45°	0,75 x DC	25°	16°	0,8	●		
N.2.1	0,288	0,203	0,129	0,306	0,216	0,137	45°	0,75 x DC	25°	16°	0,8	●		
N.2.2	0,301	0,213	0,135	0,320	0,226	0,143	45°	0,75 x DC	25°	16°	0,8	●		
N.2.3	0,329	0,233	0,147	0,349	0,247	0,156	45°	0,75 x DC	25°	16°	0,8	●		
N.3.1	0,137	0,097	0,061	0,146	0,103	0,065	45°	0,75 x DC	25°	16°	0,8	●		
N.3.2	0,219	0,155	0,098	0,233	0,165	0,104	45°	0,75 x DC	25°	16°	0,8	●		
N.3.3	0,219	0,155	0,098	0,233	0,165	0,104	45°	0,75 x DC	25°	16°	0,8	●		
N.4.1														
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

14

* Width of cut per helical revolution

Cutting data for ramping and helical milling = 100 %
Multiply cutting data for drilling by the factor from the table

Cutting data standard values – MonsterMill – PCR – End mill, AL version – trochoidal milling

Index	Type long		52 618 ...																			
			Ø DC (mm) =																			
			5				6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1																						
P.1.2																						
P.1.3																						
P.1.4																						
P.1.5																						
P.2.1																						
P.2.2																						
P.2.3																						
P.2.4																						
P.3.1																						
P.3.2																						
P.3.3																						
P.4.1																						
P.4.2																						
M.1.1																						
M.2.1																						
M.3.1																						
K.1.1																						
K.1.2																						
K.2.1																						
K.2.2																						
K.3.1																						
K.3.2																						
N.1.1	800	66°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,024	0,14	0,10	0,08	0,031	0,17	0,12	0,10	0,037	0,19	0,13	0,11	0,043
N.1.2	725	66°	0,08	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028	0,15	0,11	0,09	0,034	0,17	0,12	0,10	0,039
N.2.1	485	66°	0,09	0,06	0,05	0,020	0,10	0,07	0,06	0,023	0,13	0,09	0,08	0,030	0,16	0,11	0,09	0,035	0,18	0,13	0,11	0,041
N.2.2	385	66°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,024	0,14	0,10	0,08	0,031	0,17	0,12	0,10	0,037	0,19	0,13	0,11	0,043
N.2.3	280	66°	0,10	0,07	0,06	0,023	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,034	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,047
N.3.1	350	66°	0,04	0,03	0,02	0,009	0,05	0,03	0,03	0,011	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,019
N.3.2	210	66°	0,07	0,05	0,04	0,015	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,027	0,14	0,10	0,08	0,031
N.3.3	280	66°	0,07	0,05	0,04	0,015	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,027	0,14	0,10	0,08	0,031
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Cutting depth corresponding to the cutting length

Index	52 618 ... Ø DC (mm) = 14 a_e 0,1 x DC f_z (mm)	14 a_e 0,2 x DC f_z (mm)	14 a_e 0,3 x DC f_z (mm)	14 h_m	16 a_e 0,1 x DC f_z (mm)	16 a_e 0,2 x DC f_z (mm)	16 a_e 0,3 x DC f_z (mm)	16 h_m	18 a_e 0,1 x DC f_z (mm)	18 a_e 0,2 x DC f_z (mm)	18 a_e 0,3 x DC f_z (mm)	18 h_m	20 a_e 0,1 x DC f_z (mm)	20 a_e 0,2 x DC f_z (mm)	20 a_e 0,3 x DC f_z (mm)	20 h_m	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1																			
P.1.2																			
P.1.3																			
P.1.4																			
P.1.5																			
P.2.1																			
P.2.2																			
P.2.3																			
P.2.4																			
P.3.1																			
P.3.2																			
P.3.3																			
P.4.1																			
P.4.2																			
M.1.1																			
M.2.1																			
M.3.1																			
K.1.1																			
K.1.2																			
K.2.1																			
K.2.2																			
K.3.1																			
K.3.2																			
N.1.1	0,21	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,056	0,27	0,19	0,15	0,060	●		
N.1.2	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,047	0,23	0,16	0,13	0,051	0,24	0,17	0,14	0,054	●		
N.2.1	0,20	0,14	0,12	0,045	0,22	0,16	0,13	0,050	0,24	0,17	0,14	0,054	0,25	0,18	0,15	0,057	●		
N.2.2	0,21	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,056	0,27	0,19	0,15	0,060	●		
N.2.3	0,23	0,16	0,13	0,052	0,25	0,18	0,15	0,057	0,27	0,19	0,16	0,061	0,29	0,21	0,17	0,065	●		
N.3.1	0,10	0,07	0,06	0,022	0,11	0,07	0,06	0,024	0,11	0,08	0,07	0,025	0,12	0,09	0,07	0,027	●		
N.3.2	0,15	0,11	0,09	0,035	0,17	0,12	0,10	0,038	0,18	0,13	0,11	0,041	0,19	0,14	0,11	0,043	●		
N.3.3	0,15	0,11	0,09	0,035	0,17	0,12	0,10	0,038	0,18	0,13	0,11	0,041	0,19	0,14	0,11	0,043	●		
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Cutting data standard values – MonsterMill – MCR – End mill, short – long

Index	Type short		50 752 ...						Type short	Type long	50 752 ...													
			Ø DC (mm) =								Ø DC (mm) =													
			1			2					3			4			5			6				
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	$a_{p\,max.}$ x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	
			f_z (mm)								f_z (mm)													
P.1.1	160	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.1.2	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.1.3	120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.1.4	120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.1.5	100	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.2.1	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.2.2	120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.2.3	100	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.2.4	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.3.1	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.3.2	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.3.3	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
P.4.1	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027		
P.4.2	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027		
M.1.1	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027		
M.2.1																								
M.3.1	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027		
K.1.1	160	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042		
K.1.2	160	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042		
K.2.1	140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042		
K.2.2	140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042		
K.3.1	100	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030	0,077	0,057	0,036		
K.3.2	100	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030	0,077	0,057	0,036		
N.1.1																								
N.1.2																								
N.2.1																								
N.2.2																								
N.2.3																								
N.3.1	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
N.3.2	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
N.3.3	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
N.4.1																								
S.1.1																								
S.1.2																								
S.2.1																								
S.2.2																								
S.2.3																								
S.3.1	60	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020	0,051	0,038	0,024		
S.3.2	60	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020	0,051	0,038	0,024		
S.3.3	60	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020	0,051	0,038	0,024		
H.1.1																								
H.1.2																								
H.1.3																								
H.1.4																								
H.2.1	80	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030		
H.3.1																								
O.1.1																								
O.1.2																								
O.2.1																								
O.2.2																								
O.3.1																								

* = with an a_p of 1.5 x d_1 the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: Diameter 3–5 = 3° / Diameter 6–9 = 5° / Diameter 10–20 = 8°

Index	50 752 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	8			10			12			14			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.4	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.5	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.4	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.3.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.3.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.3.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.4.1	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
P.4.2	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
M.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
M.2.1																					
M.3.1	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
K.1.1	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.1.2	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.2.1	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.2.2	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.3.1	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
K.3.2	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
N.3.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
N.3.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
N.4.1																					
S.1.1																					
S.1.2																					
S.2.1																					
S.2.2																					
S.2.3																					
S.3.1	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
S.3.2	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
S.3.3	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – MonsterMill – MCR– End mill, extra long

Index	Type extra long			50 752 ...															
				Ø DC (mm) =															
				3			4			5			6			8			
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC		f_z (mm)															
P.1.1	120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.1.2	100	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.1.3	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.1.4	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.1.5	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.2.1	100	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.2.2	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.2.3	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.2.4	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.3.1	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.3.2	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.3.3	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
P.4.1	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
P.4.2	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
M.1.1	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
M.2.1																			
M.3.1	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
K.1.1	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04	
K.1.2	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04	
K.2.1	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04	
K.2.2	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04	
K.3.1	100	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03	
K.3.2	100	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03	
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1	120	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
N.3.2	120	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
N.3.3	120	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1	60	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
S.3.2	60	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
S.3.3	60	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02	
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1	80	0,5*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03	
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

* = Trimming and trochoidal slot milling

Plunging angle for ramping and helical milling: Diameter 3–5 = 3° / Diameter 6–9 = 5° / Diameter 10–20 = 8°

Index	50 752 ... Ø DC (mm) = 10			12			14			16			20		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	f_z (mm)														
P.1.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.1.2	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.1.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.1.4	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.1.5	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.2.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.2.2	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.2.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.2.4	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.3.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.3.2	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.3.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
P.4.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
P.4.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
M.1.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
M.2.1															
M.3.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
K.1.1	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10
K.1.2	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10
K.2.1	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10
K.2.2	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10
K.3.1	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08
K.3.2	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
N.3.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
N.3.3	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
S.3.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
S.3.3	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

Index	Emulsion	Compressed air	MMS
P.1.1		●	
P.1.2		●	
P.1.3		●	
P.1.4		●	
P.1.5		●	
P.2.1		●	
P.2.2		●	
P.2.3		●	
P.2.4		●	
P.3.1		●	
P.3.2		●	
P.3.3		●	
P.4.1	●		
P.4.2	●		
M.1.1	●		
M.2.1			
M.3.1	●		
K.1.1		●	
K.1.2		●	
K.2.1		●	
K.2.2		●	
K.3.1		●	
K.3.2		●	
N.1.1			
N.1.2			
N.2.1			
N.2.2			
N.2.3			
N.3.1	●		
N.3.2	●		
N.3.3	●		
N.4.1			
S.1.1			
S.1.2			
S.2.1			
S.2.2			
S.2.3			
S.3.1	●		
S.3.2	●		
S.3.3	●		
H.1.1			
H.1.2			
H.1.3			
H.1.4			
H.2.1		●	
H.3.1			
O.1.1			
O.1.2			
O.2.1			
O.2.2			
O.3.1			

● 1st choice
○ suitable

14

Cutting data – CircularLine – End Mills – CCR-UNI, short – long

Index	Type short / long		53 585..., 53 587..., 53 586 ..., 53 642 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.1.2	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.3	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.5	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.2	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.3	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.1	220	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.2	220	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.3	200	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.4.1	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	160	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.1.2	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.2	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.1	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.2	200	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3																		
S.3.1	140	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	100	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 585..., 53 587..., 53 586 ..., 53 642 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	14				16				18				20						
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
P.1.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.1.3	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.1.4	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.1.5	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.2.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
P.2.2	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
P.2.3	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.2.4	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.3.1	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.3.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.3.3	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.4.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
P.4.2	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.1.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.2.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.3.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
K.1.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
K.1.2	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
K.2.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
K.2.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
K.3.1	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
K.3.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1																			
N.3.2																			
N.3.3																			
N.4.1																			
S.1.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.3																			
S.3.1	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.2	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

14

Cutting data standard values – CircularLine – End mill – CCR-UNI, extra long

Index	Type extra long			53 589 … / 53 593 …																
				Ø DC (mm) =																
	4xDC	5xDC	max. angle of engagement	6			8			10			12			14				
				a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m		
	v_c (m/min)			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)				
P.1.1	250	220	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
P.1.2	250	220	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.1.3	250	220	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.1.4	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.1.5	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.2.1	250	220	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
P.2.2	250	220	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
P.2.3	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.2.4	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.3.1	200	180	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.3.2	200	180	45°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.3.3	180	160	45°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
P.4.1	150	130	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020		
P.4.2	130	110	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020		
M.1.1	110	90	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020		
M.2.1	110	90	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020		
M.3.1	110	90	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020		
K.1.1	260	230	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
K.1.2	260	230	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
K.2.1	260	230	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
K.2.2	230	210	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028		
K.3.1	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
K.3.2	180	170	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025		
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1																				
N.3.2																				
N.3.3																				
N.4.1																				
S.1.1	70	60	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016		
S.1.2	70	60	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016		
S.2.1	50	40	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016		
S.2.2	50	40	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016		
S.2.3																				
S.3.1	120	100	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016		
S.3.2	90	80	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016		
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

Depth of cut corresponds to the flute length

Index	53 589 ... / 53 593 ... Ø DC (mm) = 16 a_e 0,05 x DC f_z (mm)	16 a_e 0,1 x DC f_z (mm)	16 h_m	18 a_e 0,05 x DC f_z (mm)	18 a_e 0,1 x DC f_z (mm)	18 h_m	20 a_e 0,05 x DC f_z (mm)	20 a_e 0,1 x DC f_z (mm)	20 h_m	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
P.1.2	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.1.3	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.1.4	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.1.5	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.2.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
P.2.2	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
P.2.3	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.2.4	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.3.1	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.3.2	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.3.3	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.4.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
P.4.2	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.1.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.2.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.3.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
K.1.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.1.2	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.2.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.2.2	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.3.1	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
K.3.2	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.1.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.3												
S.3.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

14

Cutting data standard values – CircularLine – CCR-VA, long 3xDC

Index	Type long		53 643 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1																		
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1																		
P.2.2																		
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	200	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	**160**	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	**160**	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	**160**	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	**85**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	**85**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	**65**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	**65**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3	**65**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.3.1	**160**	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	**120**	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 643 ... Ø DC (mm) = 14				16				18				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1																			
P.1.2																			
P.1.3																			
P.1.4																			
P.1.5																			
P.2.1																			
P.2.2																			
P.2.3																			
P.2.4																			
P.3.1																			
P.3.2																			
P.3.3																			
P.4.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
P.4.2	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.1.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.2.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.3.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
K.1.1																			
K.1.2																			
K.2.1																			
K.2.2																			
K.3.1																			
K.3.2																			
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1																			
N.3.2																			
N.3.3																			
N.4.1																			
S.1.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.3	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.3.1	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.2	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

14

Cutting data standard values – CircularLine – CCR-VA, extra-long 4xDC

Index	Type extra long		53 644 ...															
			Ø DC (mm) =															
			6			8			10			12			14			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	
			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)			
P.1.1																		
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1																		
P.2.2																		
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	170	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
P.4.2	150	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
M.1.1	125	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
M.2.1	125	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
M.3.1	125	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	75	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.1.2	75	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.2.1	55	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.2.2	55	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.2.3	55	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.3.1	140	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.3.2	105	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 644 ... Ø DC (mm) = 16 a_e 0,05 x DC f_z (mm)	16 a_e 0,1 x DC f_z (mm)	16 h_m	18 a_e 0,05 x DC f_z (mm)	18 a_e 0,1 x DC f_z (mm)	18 h_m	20 a_e 0,05 x DC f_z (mm)	20 a_e 0,1 x DC f_z (mm)	20 h_m	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1												
P.1.2												
P.1.3												
P.1.4												
P.1.5												
P.2.1												
P.2.2												
P.2.3												
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
P.4.2	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.1.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.2.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.3.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
K.1.1												
K.1.2												
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.1.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.3	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

14

Cutting data standard values – CircularLine – CCR-AL

Index	Type long	Type extra long		max. angle of engagement	53 590 ..., 53 591 ..., 53 594 ..., 53 595 ..., 53 641 ...															
					Ø DC (mm) =															
					6				8				10				12			
	3xDC	4xDC	5xDC		a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m
	v_c (m/min)				f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1																				
P.1.2																				
P.1.3																				
P.1.4																				
P.1.5																				
P.2.1																				
P.2.2																				
P.2.3																				
P.2.4																				
P.3.1																				
P.3.2																				
P.3.3																				
P.4.1																				
P.4.2																				
M.1.1																				
M.2.1																				
M.3.1																				
K.1.1																				
K.1.2																				
K.2.1																				
K.2.2																				
K.3.1																				
K.3.2																				
N.1.1	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.1.2	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.2.1	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.2.2	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.2.3	400	350	265	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.3.1	400	350	265	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.3.2	400	350	265	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.3.3	300	250	190	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.4.1																				
S.1.1																				
S.1.2																				
S.2.1																				
S.2.2																				
S.2.3																				
S.3.1																				
S.3.2																				
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

Depth of cut corresponds to the flute length

Plunging angle for ramping and helical milling: 4°

Index	53 590 ..., 53 591 ..., 53 594 ..., 53 595 ..., 53 641 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	14				16				18				20						
	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1																			
P.1.2																			
P.1.3																			
P.1.4																			
P.1.5																			
P.2.1																			
P.2.2																			
P.2.3																			
P.2.4																			
P.3.1																			
P.3.2																			
P.3.3																			
P.4.1																			
P.4.2																			
M.1.1																			
M.2.1																			
M.3.1																			
K.1.1																			
K.1.2																			
K.2.1																			
K.2.2																			
K.3.1																			
K.3.2																			
N.1.1	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.1.2	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.2.1	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.2.2	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.2.3	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.3.1	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.3.2	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.3.3	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Cutting data standard values – CircularLine – CCR Ti, long

Index	Type long		52 510 ...											
			Ø DC (mm) =											
			6				8				10			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)			
P.4.1	200	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
P.4.2	180	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
M.1.1	200	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
M.2.1	160	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
M.3.1	180	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	**140**	25°	0,060	0,042	0,034	0,020	0,070	0,049	0,040	0,030	0,089	0,063	0,052	0,040
S.3.2	**120**	25°	0,060	0,042	0,034	0,020	0,070	0,049	0,040	0,030	0,089	0,063	0,052	0,040
S.3.3	**100**	25°	0,045	0,032	0,026	0,018	0,052	0,037	0,030	0,028	0,067	0,047	0,039	0,038

Cutting data standard values – CircularLine – CCR-Ti, extra-long

Index	Type extra long		52 510 ...											
			Ø DC (mm) =											
			6			8			10			12		
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m
			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)		
P.4.1	170	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
P.4.2	150	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
M.1.1	170	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
M.2.1	130	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
M.3.1	150	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	**120**	25°	0,031	0,022	0,015	0,036	0,025	0,020	0,045	0,032	0,030	0,054	0,038	0,040
S.3.2	**100**	25°	0,031	0,022	0,015	0,036	0,025	0,020	0,045	0,032	0,030	0,054	0,038	0,040
S.3.3	**90**	25°	0,022	0,016	0,013	0,027	0,019	0,015	0,036	0,025	0,025	0,045	0,032	0,035

Depth of cut corresponds to the flute length

Index	52 510 ... Ø DC (mm) = 12				16				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)						
P.4.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
P.4.2	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
M.1.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
M.2.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
M.3.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,113	0,080	0,065	0,050	0,157	0,111	0,090	0,060	0,217	0,153	0,125	0,075	●		
S.3.2	0,113	0,080	0,065	0,050	0,157	0,111	0,090	0,060	0,217	0,153	0,125	0,075	●		
S.3.3	0,085	0,060	0,049	0,048	0,117	0,083	0,068	0,058	0,163	0,115	0,094	0,070	●		

Index	52 510 ... Ø DC (mm) = 16			20			● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)			f_z (mm)					
P.4.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
P.4.2	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
M.1.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
M.2.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
M.3.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1	0,076	0,054	0,050	0,107	0,076	0,060	●		
S.3.2	0,076	0,054	0,050	0,107	0,076	0,060	●		
S.3.3	0,058	0,041	0,045	0,080	0,057	0,055	●		

14

Cutting data standard values – CircularLine – End mill – CCR-H

Index	Type long		53 596 ...												● 1st choice ○ suitable		
			Ø DC (mm) = 6				8				10						
	v_c (m/min)	max. angle of engagement	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	Emulsion	Compressed air	MMS
			f_z (mm)				f_z (mm)				f_z (mm)						
H.1.1	130	30°	0,11	0,07	0,05	0,015	0,13	0,08	0,06	0,019	0,16	0,10	0,07	0,023		●	○
H.1.2	120	30°	0,06	0,04	0,03	0,008	0,07	0,05	0,03	0,010	0,09	0,06	0,04	0,012		●	○
H.1.3	115	30°	0,04	0,03		0,006	0,05	0,03		0,007	0,06	0,04		0,009		●	○
H.1.4	110	30°	0,02			0,003	0,03				0,04			0,006		●	○
H.2.1	130	30°	0,11	0,07	0,05	0,015	0,13	0,08	0,06	0,019	0,16	0,10	0,07	0,023		●	○
H.3.1	130	30°	0,11	0,07	0,05	0,015	0,13	0,08	0,06	0,019	0,16	0,10	0,07	0,023			

Index	Type long		53 596 ...												● 1st choice ○ suitable		
			Ø DC (mm) = 12				16				20						
	v_c (m/min)	max. angle of engagement	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	Emulsion	Compressed air	MMS
			f_z (mm)				f_z (mm)				f_z (mm)						
H.1.1	130	30°	0,19	0,12	0,08	0,027	0,22	0,14	0,10	0,031	0,24	0,15	0,11	0,034		●	○
H.1.2	120	30°	0,10	0,07	0,05	0,015	0,13	0,08		0,018	0,14	0,09		0,020		●	○
H.1.3	115	30°	0,07	0,05		0,010	0,09	0,06		0,012	0,09	0,06		0,013		●	○
H.1.4	110	30°	0,05			0,006	0,06			0,008	0,08			0,011		●	○
H.2.1	130	30°	0,19	0,12	0,08	0,027	0,22	0,14		0,031	0,24	0,15		0,034		●	○
H.3.1	130	30°	0,19	0,12	0,08	0,027	0,22	0,14	0,10	0,031	0,24	0,15	0,11	0,034		●	○

Depth of cut corresponds to the flute length

Cutting data standard values – SilverLine – NC deburring cutter

Index	v_c (m/min)	50 560 ..., 50 561 ..., 50 562 ..., 50 563 ... DPB72S Ø DC (mm) = 4	6	8	10	12	16	v_c (m/min)	50 564 ..., 50 565 ..., 50 566 ..., 50 567 ... uncoated Ø DC (mm) = 4	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)							f_z (mm)								
P.1.1	130	0,03	0,035	0,045	0,06	0,08	0,09	70	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.2	130	0,03	0,035	0,045	0,06	0,08	0,09	70	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.3	120	0,03	0,035	0,045	0,06	0,08	0,09	65	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.4	120	0,03	0,035	0,045	0,06	0,08	0,09	65	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.5	90	0,025	0,03	0,04	0,055	0,075	0,085	50	0,015	0,02	0,03	0,045	0,065	0,075	●	○	○
P.2.1	130	0,03	0,035	0,045	0,06	0,08	0,09	70	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.2.2	100	0,03	0,035	0,045	0,06	0,08	0,09	60	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.2.3	90	0,025	0,03	0,04	0,055	0,075	0,085	50	0,015	0,02	0,03	0,045	0,065	0,075	●	○	○
P.2.4	80	0,02	0,02	0,025	0,03	0,04	0,05	45	0,01	0,015	0,015	0,02	0,03	0,04	●	○	○
P.3.1	120	0,03	0,035	0,04	0,055	0,075	0,085	65	0,02	0,025	0,03	0,045	0,065	0,075	●	○	○
P.3.2	70	0,02	0,02	0,025	0,03	0,04	0,05	40	0,01	0,015	0,015	0,02	0,03	0,04	●	○	○
P.3.3	70	0,02	0,02	0,025	0,03	0,04	0,05	40	0,01	0,015	0,015	0,02	0,03	0,04	●	○	○
P.4.1	100	0,03	0,035	0,04	0,055	0,075	0,085	60	0,02	0,025	0,03	0,045	0,065	0,075	●		
P.4.2	95	0,025	0,03	0,04	0,055	0,075	0,085	55	0,015	0,02	0,03	0,045	0,065	0,075	●		
M.1.1	100	0,025	0,03	0,04	0,055	0,075	0,085	65	0,025	0,03	0,04	0,055	0,075	0,085	●		
M.2.1	80	0,02	0,02	0,025	0,03	0,04	0,05	50	0,02	0,02	0,025	0,03	0,04	0,05	●		
M.3.1	100	0,025	0,03	0,04	0,055	0,075	0,085	65	0,025	0,03	0,04	0,055	0,075	0,085	●		
K.1.1	130	0,03	0,035	0,045	0,06	0,08	0,09	85	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.1.2	100	0,03	0,035	0,045	0,06	0,08	0,09	65	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.2.1	130	0,03	0,035	0,045	0,06	0,08	0,09	85	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.2.2	120	0,03	0,035	0,045	0,06	0,08	0,09	80	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.3.1	130	0,03	0,035	0,045	0,06	0,08	0,09	85	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.3.2	120	0,03	0,035	0,045	0,06	0,08	0,09	80	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1	80	0,02	0,02	0,025	0,03	0,04	0,05	50	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.1.2	45	0,012	0,012	0,018	0,02	0,03	0,04	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.2.1	50	0,015	0,015	0,02	0,025	0,035	0,045	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.2.2	40	0,012	0,012	0,018	0,02	0,03	0,04	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.2.3	45	0,012	0,012	0,018	0,02	0,03	0,04	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.3.1	60	0,02	0,02	0,025	0,03	0,04	0,05	45	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.3.2	65	0,02	0,02	0,025	0,03	0,04	0,05	45	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.3.3	50	0,015	0,015	0,02	0,025	0,035	0,045	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

14

Cutting data standard values – SilverLine – End mill

Index	Type short / long		50 993 …, 50 994 …, 50 995 …, 50 996 …, 50 997 …, 50 998 …																		● 1st choice ○ suitable		
			Ø DC (mm) =																				
			6			8			10			12			16			20					
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	Emulsion	Compressed air	MMS
			f_z (mm)																				
P.1.1	205	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.2	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.3	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.4	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.5	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.1	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.2	190	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.3	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.4	170	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.1	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.2	170	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.3	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.4.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	200	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.1.2	180	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.2.1	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.2	170	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.1	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.2	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1	315	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.2	315	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.3	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.4.1																							
S.1.1	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	80	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

Plunging angle for ramping and helical milling = 2-3°

Cutting data standard values – SilverLine – End mill

Index	Type long		50 949 ..., 50 999 ...																			● 1st choice ○ suitable		
			Ø DC (mm) =																					
			6			8			10			12			16			20			Emulsion	Compressed air	MMS
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC			
			f_z (mm)																					
P.1.1	165	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.2	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.3	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.4	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.5	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.1	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.2	150	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.3	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.4	135	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.1	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.2	135	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.3	115	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.4.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	65	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	160	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.1.2	145	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.2.1	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.2	135	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.1	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.2	130	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.2	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.3	200	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.4.1																							
S.1.1	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	65	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

14

Plunging angle for ramping and helical milling = 2-3°

Cutting data standard values – SilverLine – End mills – Trochoidal machining

Index	Type long		50 949 ..., 50 999 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.1.2	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.3	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.5	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.2	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.3	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.1	220	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.2	220	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.3	200	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.4.1	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	160	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.1.2	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.2	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.1	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.2	200	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3																		
S.3.1	140	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	100	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling = 2-3°

Cutting depth corresponding to the cutting length

Index	50 949 ..., 50 999 ...								● 1st choice ○ suitable		
	Ø DC (mm) = 16				20						
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)						
P.1.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.1.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.4	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.5	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.2.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.2.2	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.2.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.2.4	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.1	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.4.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
P.4.2	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.1.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.2.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.3.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
K.1.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.1.2	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.2.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.2.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
K.3.1	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
K.3.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.3											
S.3.1	0,16	0,11	0,09	0,035	0,18	0,12	0,10	0,040	●		
S.3.2	0,16	0,11	0,09	0,035	0,18	0,12	0,10	0,040	●		
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

Cutting data standard values – SilverLine – End mill

Index	Type long		50 558 ..., 50 958																		
			Ø DC (mm) =																		
			3,0			3,5–4,0			4,5–5,0			5,5–6,0			7,0–8,0			9,0–10,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	110	1,0*	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043
P.1.2	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.3	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.4	80	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.5	80	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.1	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.2	70	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.3	70	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.4	55	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.3.1																				
P.3.2																				
P.3.3																				
P.4.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
P.4.2	40	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.1.1	40	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.2.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.3.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
K.1.1	130	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.1.2	120	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.2.1	130	1,0*	0,040	0,032	0,020	0,048	0,038	0,024	0,056	0,045	0,028	0,064	0,051	0,032	0,079	0,063	0,040	0,095	0,076	0,048
K.2.2	120	1,0*	0,040	0,032	0,020	0,048	0,038	0,024	0,056	0,045	0,028	0,064	0,051	0,032	0,079	0,063	0,040	0,095	0,076	0,048
K.3.1	130	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.3.2	120	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	200	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.3.2	200	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.3.3	140	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.4.1																				
S.1.1	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.1.2	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.1	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.2	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.3	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.3.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
S.3.2	20	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

Plunging angle for ramping and helical milling = 6-10°

Index	50 558 ..., 50 958																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	11,0–12,0			14,0			15,0–16,0			17,0–18,0			19,0–20,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																		
P.1.1	0,102	0,082	0,051	0,116	0,093	0,058	0,124	0,099	0,062	0,131	0,105	0,066	0,139	0,111	0,070	●	○	○
P.1.2	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.3	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.4	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.5	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.1	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.2	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.3	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.4	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
P.4.2	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.1.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.2.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.3.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
K.1.1	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.1.2	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.2.1	0,110	0,088	0,055	0,126	0,101	0,063	0,134	0,107	0,067	0,142	0,114	0,071	0,150	0,120	0,075	●	○	○
K.2.2	0,110	0,088	0,055	0,126	0,101	0,063	0,134	0,107	0,067	0,142	0,114	0,071	0,150	0,120	0,075	●	○	○
K.3.1	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.3.2	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.3.2	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.3.3	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.4.1																		
S.1.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
S.3.2	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data standard values – SilverLine – End mill

Index	Type short		Type long		Type extra long		50 966 ..., 50 967 ..., 50 992 ...														
							Ø DC (mm) =														
							3,0			3,5–4,0			4,5–5,0			5,5–6,0			6,5–8,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)														
P.1.1	252	1,0	210	1,0*	105	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.2	240	1,0	200	1,0*	100	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.3	240	1,0	200	1,0*	100	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.4	228	1,0	190	1,0*	95	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.5	228	1,0	190	1,0*	95	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.1	240	1,0	200	1,0*	100	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.2	228	1,0	190	1,0*	95	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.3	216	1,0	180	1,0*	90	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.4	204	1,0	170	1,0*	85	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.3.1																					
P.3.2																					
P.3.3																					
P.4.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
P.4.2	96	1,0	80	1,0*	50	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
M.1.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
M.2.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
M.3.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
K.1.1	240	1,0	200	1,0*	100	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
K.1.2	216	1,0	180	1,0*	90	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
K.2.1	228	1,0	190	1,0*	60	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
K.2.2	204	1,0	170	1,0*	85	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
K.3.1	216	1,0	180	1,0*	90	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
K.3.2	192	1,0	160	1,0*	80	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	420	1,0	350	1,0*	175	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
N.3.2	420	1,0	350	1,0*	175	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
N.3.3	336	1,0	280	1,0*	140	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
N.4.1																					
S.1.1	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.1.2	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.1	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.2	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.3	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.3.1	108	1,0	90	1,0*	45	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
S.3.2	60	1,0	50	1,0*	25	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

"Extra-long" version: when profiling with an a_e of 0.1–0.4 x DC an a_p of 1.0 x DC should be used.

Plunging angle for ramping and helical milling: 3°

Index	50 966 ..., 50 967 ..., 50 992 ...																			● 1st choice ○ suitable		
	Ø DC (mm) =																					
	8,5–10,0			12,0			14,0			16,0			18,0			20,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																					
P.1.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.3	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.4	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.5	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.3	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.4	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.3.1																					
P.3.2																					
P.3.3																					
P.4.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
P.4.2	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.1.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.2.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.3.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
K.1.1	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.1.2	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
K.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
K.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
K.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●		
N.3.2	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●		
N.3.3	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●		
N.4.1																					
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●		
S.3.2	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – SilverLine – End mill

Index	Type long		50 976 ..., 50 977 ...															
			Ø DC (mm) =															
			3		4		5		6		8		10		12		14	
			a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	210	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.2	200	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.3	200	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.4	190	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.5	190	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.2.1	200	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.2.2	190	2,0	0,020	0,014	0,027	0,019	0,034	0,025	0,042	0,030	0,056	0,040	0,070	0,050	0,084	0,060	0,098	0,070
P.2.3	180	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.2.4	170	2,0	0,020	0,014	0,027	0,019	0,034	0,025	0,042	0,030	0,056	0,040	0,070	0,050	0,084	0,060	0,098	0,070
P.3.1	180	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.3.2	170	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.3.3	140	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.4.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
P.4.2	100	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
M.1.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
M.2.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
M.3.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
K.1.1	200	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
K.1.2	180	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
K.2.1	190	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
K.2.2	170	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
K.3.1	180	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
K.3.2	160	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	350	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
N.3.2	350	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
N.3.3	280	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Profiling with an a_e < 0.3xDC only possible under certain conditions!

Plunging angle for ramping and helical milling: 3°

Index	50 976 ..., 50 977 ...						● 1st choice ○ suitable		
	Ø DC (mm) =								
	16		18		20				
	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)								
P.1.1	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.2	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.3	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.4	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.5	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.2.1	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.2.2	0,105	0,075	0,112	0,080	0,119	0,085	●	○	○
P.2.3	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.2.4	0,105	0,075	0,112	0,080	0,119	0,085	●	○	○
P.3.1	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.3.2	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.3.3	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.4.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
P.4.2	0,071	0,051	0,076	0,054	0,081	0,058	●		
M.1.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
M.2.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
M.3.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
K.1.1	0,134	0,096	0,143	0,102	0,151	0,108	●	●	●
K.1.2	0,134	0,096	0,143	0,102	0,151	0,108	●	●	●
K.2.1	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
K.2.2	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
K.3.1	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
K.3.2	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1	0,134	0,096	0,143	0,102	0,151	0,108	●	○	○
N.3.2	0,134	0,096	0,143	0,102	0,151	0,108	●	○	○
N.3.3	0,134	0,096	0,143	0,102	0,151	0,108	●	○	○
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – SilverLine – End mill

Index	Type extra long		50 970 ..., 50 971 ..., 50 974 ..., 50 975 ...																		
			Ø DC (mm) =																		
			3			4			5			6			8			10		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	160	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.3	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.4	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.5	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.1	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.3	120	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.4	120	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.3.1	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.3.2	80	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.3.3	80	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.4.1	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
P.4.2	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
M.1.1	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
M.2.1	70	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
M.3.1	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
K.1.1	150	1,0	0,040	0,031	0,022	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,110	0,082	0,055
K.1.2	140	1,0	0,040	0,031	0,022	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,110	0,082	0,055
K.2.1	150	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
K.2.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
K.3.1	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
K.3.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	220	1,0	0,034	0,026	0,019	0,045	0,035	0,025	0,054	0,042	0,030	0,063	0,049	0,035	0,081	0,062	0,045	0,102	0,079	0,057
N.3.2	180	1,0	0,034	0,026	0,019	0,045	0,035	0,025	0,054	0,042	0,030	0,063	0,049	0,035	0,081	0,062	0,045	0,102	0,079	0,057
N.3.3	180	1,0	0,034	0,026	0,019	0,045	0,035	0,025	0,054	0,042	0,030	0,063	0,049	0,035	0,081	0,062	0,045	0,102	0,079	0,057
N.4.1																				
S.1.1	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.1.2	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.2.1	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.2.2	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.2.3	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.3.1	80	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,072	0,055	0,040	0,090	0,069	0,050
S.3.2	70	0,5	0,020	0,015	0,011	0,027	0,021	0,015	0,032	0,025	0,018	0,040	0,031	0,022	0,054	0,042	0,030	0,072	0,055	0,040
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

Plunging angle for ramping and helical milling: 3°

Index	50 970 ..., 50 971 ..., 50 974 ..., 50 975 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	12			14			16			18			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.3	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.4	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.5	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.3	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.4	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.3.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.3.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.3.3	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.4.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
P.4.2	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
M.1.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
M.2.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
M.3.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
K.1.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	●	●
K.1.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	●	●
K.2.1	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
K.2.2	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
K.3.1	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
K.3.2	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,126	0,097	0,070	0,153	0,118	0,085	0,180	0,139	0,100	0,198	0,153	0,110	0,216	0,166	0,120	●		
N.3.2	0,126	0,097	0,070	0,153	0,118	0,085	0,180	0,139	0,100	0,198	0,153	0,110	0,216	0,166	0,120	●		
N.3.3	0,126	0,097	0,070	0,153	0,118	0,085	0,180	0,139	0,100	0,198	0,153	0,110	0,216	0,166	0,120	●		
N.4.1																		
S.1.1	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.1.2	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.2.1	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.2.2	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.2.3	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.3.1	0,108	0,083	0,060	0,126	0,097	0,070	0,144	0,111	0,080	0,162	0,125	0,090	0,180	0,139	0,100	●		
S.3.2	0,090	0,069	0,050	0,099	0,076	0,055	0,108	0,083	0,060	0,126	0,097	0,070	0,144	0,111	0,080	●		
S.3.3																●		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – SilverLine – End mill, roughing-finishing and rough milling cutter

Index	Type short	Type long		50 969 ..., 50 970..., 50 971 ..., 50 972 ..., 50 973 ..., 50 974 ..., 50 975 ..., 50 978 ..., 50 979 ...																		
				Ø DC (mm) =																		
				3,0			3,5–4,0			4,5–5,0			5,5–6,0			7,0–8,0			9,0–10,0		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	253	230	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.2	242	220	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.3	242	220	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.4	230	210	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.5	230	210	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.2.1	242	220	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.2.2	230	210	1,0*	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050
P.2.3	220	200	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.2.4	210	190	1,0*	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050
P.3.1	220	200	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.3.2	210	190	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.3.3	176	160	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.4.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
P.4.2	100	90	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
M.1.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
M.2.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
M.3.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
K.1.1	242	220	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
K.1.2	220	200	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
K.2.1	230	210	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
K.2.2	210	190	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
K.3.1	220	200	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
K.3.2	200	180	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	385	350	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
N.3.2	308	350	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
N.3.3	308	280	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
N.4.1																					
S.1.1	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.1.2	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.1	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.2	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.3	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.3.1	110	90	0,5	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050
S.3.2	70	50	0,5	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

Plunging angle for ramping and helical milling: 3°

Index	50 969 ..., 50 970..., 50 971 ..., 50 972 ..., 50 973 ..., 50 974 ..., 50 975 ..., 50 978 ..., 50 979 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	11,0–12,0			14,0			15,0–16,0			17,0→18,0			19,0–20,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.3	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.4	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.5	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.2.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.2.2	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.3	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.2.4	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.3.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.3.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.3.3	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.4.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
P.4.2	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.1.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.2.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.3.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
K.1.1	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●	●	●
K.1.2	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●	●	●
K.2.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.2.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.3.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.3.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●		
N.3.2	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●		
N.3.3	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●		
N.4.1																		
S.1.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●		
S.3.2	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – SilverLine – High-precision finish milling cutter

Index	Type long	Type extra long		50 991 ...							● 1st choice ○ suitable		
				Ø DC (mm) =									
				6	8	10	12	16	20	25			
				a_e 0,05 x DC									
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)							Emulsion	Compressed air	MMS
P.1.1	260	180	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.2	250	175	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.3	250	175	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.4	230	160	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.5	230	160	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.2.1	250	175	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.2.2	230	160	2,0	0,023	0,031	0,039	0,047	0,059	0,067	0,077	●		
P.2.3	220	155	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.2.4	210	145	2,0	0,023	0,031	0,039	0,047	0,059	0,067	0,077	●		
P.3.1	220	155	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.3.2	210	145	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.3.3	175	120	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.4.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
P.4.2	100	70	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
M.1.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
M.2.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
M.3.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
K.1.1	250	175	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
K.1.2	220	155	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
K.2.1	230	160	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
K.2.2	210	145	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
K.3.1	220	155	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
K.3.2	200	140	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1	430	300	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
N.3.2	430	300	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
N.3.3	350	245	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
N.4.1													
S.1.1	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.1.2	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.2.1	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.2.2	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.2.3	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.3.1	200	140	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
S.3.2	125	85	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Plunging angle for ramping and helical milling = 1°

Cutting data standard values –
SilverLine – Radius milling cutters – 50 990 ... – Finish machining

Index	Type long		50 990 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
			4	5	6	8	10	12	16	20			
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)								Emulsion	Compressed air	MMS
P.1.1	195	0,08	0,019	0,025	0,030	0,040	0,050	0,060	0,075	0,085	●	○	○
P.1.2	165	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.3	165	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.4	145	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.5	145	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.1	165	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.2	130	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.3	130	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.4	100	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.3.1													
P.3.2													
P.3.3													
P.4.1	90	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
P.4.2	75	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
M.1.1	75	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
M.2.1	90	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
M.3.1	90	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
K.1.1	235	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
K.1.2	220	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
K.2.1	235	0,08	0,028	0,033	0,039	0,050	0,061	0,072	0,089	0,100	●		○
K.2.2	220	0,08	0,028	0,033	0,039	0,050	0,061	0,072	0,089	0,100	●		○
K.3.1	235	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
K.3.2	220	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1	360	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●	○	○
N.3.2	360	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●	○	○
N.3.3	255	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●	○	○
N.4.1													
S.1.1													
S.1.2													
S.2.1													
S.2.2													
S.2.3													
S.3.1													
S.3.2													
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Plunging angle for ramping and helical milling: 3°

Cutting data standard values – SilverLine – Radius milling cutters – 50 990 ... – Rough machining

Index	Type long		50 990 ...																		
			Ø DC (mm) =																		
			4			5			6			8			10			12		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	130	1,0	0,026	0,022	0,017	0,031	0,027	0,021	0,036	0,031	0,024	0,047	0,040	0,031	0,056	0,049	0,038	0,067	0,058	0,045
P.1.2	110	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.1.3	110	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.1.4	95	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.1.5	95	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.2.1	110	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.2.2	85	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.2.3	85	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.2.4	65	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040
P.3.1																				
P.3.2																				
P.3.3																				
P.4.1	60	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030
P.4.2	50	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030
M.1.1	50	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030
M.2.1	60	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030
M.3.1	60	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030
K.1.1	155	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072
K.1.2	145	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072
K.2.1	155	1,0	0,032	0,027	0,021	0,038	0,033	0,025	0,044	0,038	0,029	0,054	0,047	0,036	0,065	0,056	0,043	0,077	0,066	0,051
K.2.2	145	1,0	0,032	0,027	0,021	0,038	0,033	0,025	0,044	0,038	0,029	0,054	0,047	0,036	0,065	0,056	0,043	0,077	0,066	0,051
K.3.1	155	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072
K.3.2	145	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	240	1,0	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066
N.3.2	240	1,0	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066
N.3.3	170	1,0	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066
N.4.1																				
S.1.1																				
S.1.2																				
S.2.1																				
S.2.2																				
S.2.3																				
S.3.1																				
S.3.2																				
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

Plunging angle for ramping and helical milling: 3°

Index	50 990 ... Ø DC (mm) = 16 f_z (mm) a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	20 a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,083	0,072	0,055	0,092	0,080	0,062	●	○	○
P.1.2	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.1.3	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.1.4	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.1.5	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.1	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.2	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.3	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.4	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.3.1									
P.3.2									
P.3.3									
P.4.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
P.4.2	0,056	0,049	0,038	0,063	0,055	0,042	●		
M.1.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
M.2.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
M.3.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
K.1.1	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
K.1.2	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
K.2.1	0,093	0,081	0,062	0,104	0,090	0,070	●	○	○
K.2.2	0,093	0,081	0,062	0,104	0,090	0,070	●	○	○
K.3.1	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
K.3.2	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1	0,125	0,108	0,083	0,141	0,122	0,094	●	○	○
N.3.2	0,125	0,108	0,083	0,141	0,122	0,094	●	○	○
N.3.3	0,125	0,108	0,083	0,141	0,122	0,094	●	○	○
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

14

Cutting data standard values – SilverLine – Ball-nosed end mill

Index	Type short		Type long		50 963 ...																	
					Ø DC (mm) =																	
					3			4			5			6			7			8		
					a_e x DC																	
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05
					f_z (mm)																	
P.1.1	300	0,08	180	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.2	280	0,08	170	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.3	225	0,08	135	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.4	225	0,08	135	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.5	245	0,08	145	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.2.1	280	0,08	170	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.2.2	215	0,08	130	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
P.2.3	190	0,08	115	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.2.4	210	0,08	125	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.3.1	210	0,08	125	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.3.2	175	0,08	105	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
P.3.3	130	0,08	80	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
P.4.1																						
P.4.2																						
M.1.1																						
M.2.1																						
M.3.1																						
K.1.1	330	0,08	200	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.1.2	280	0,08	170	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.2.1	330	0,08	200	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.2.2	280	0,08	170	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
K.3.1	330	0,08	200	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.3.2	280	0,08	170	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1																						
N.3.2																						
N.3.3	455	0,08	275	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1	100	0,08	60	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.1.2	60	0,08	35	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.1.3	55	0,08	35	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.1.4																						
H.2.1	70	0,08	40	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.3.1	100	0,08	60	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Plunging angle for ramping and helical milling: 3°

Index	50 963 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	10			12			14			16			18			20					
	a_e x DC																				
	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.2	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.3	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.4	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.5	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.2.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.2.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
P.2.3	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,025	0,500	0,400	0,250	●	○	○
P.2.4	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,025	0,500	0,400	0,250	●	○	○
P.3.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,025	0,500	0,400	0,250	●	○	○
P.3.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
P.3.3	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,180	0,144	0,090	0,210	0,168	0,105	0,240	0,192	0,120	●	○	○
P.4.1																					
P.4.2																					
M.1.1																					
M.2.1																					
M.3.1																					
K.1.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.1.2	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.2.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.2.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
K.3.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.3.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1																					
N.3.2																					
N.3.3	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,180	0,144	0,090	0,210	0,168	0,105	0,240	0,192	0,120	●		
N.4.1																					
S.1.1																					
S.1.2																					
S.2.1																					
S.2.2																					
S.2.3																					
S.3.1																					
S.3.2																					
S.3.3																					
H.1.1	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.1.2	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.1.3	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.1.4																					
H.2.1	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.3.1	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

Cutting data standard values – SilverLine – Torus face cutter

Index	Type long	Type extra long		50 989 ...															
				Ø DC (mm) =															
				6			8			10			12			16			
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	**240**	**190**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.2	**210**	**170**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.3	**210**	**170**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.4	**190**	**150**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.5	**190**	**150**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.1	**220**	**175**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.2	**200**	**160**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.3	**180**	**145**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.4	**170**	**135**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.3.1	**170**	**135**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.3.2	**150**	**120**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.3.3	**120**	**95**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.4.1	**90**	**70**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.4.2	**70**	**55**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
M.1.1	90	70	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
M.2.1	90	70	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
M.3.1	90	70	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.1.1	**250**	**200**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.1.2	**230**	**185**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.2.1	**200**	**160**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.2.2	**180**	**145**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.3.1	**220**	**175**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.3.2	**210**	**170**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3	250	200	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1	120	95	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
H.1.2	80	65	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
H.1.3																		
H.1.4																		
H.2.1	120	95	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
H.3.1	120	95	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	50 989 ... Ø DC (mm) = 20 a_e 0,1–0,2 x DC f_z (mm)	a_e 0,3–0,4 x DC f_z (mm)	a_e 0,5 x DC f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,912	0,730	0,456	●	○	○
P.1.2	0,912	0,730	0,456	●	○	○
P.1.3	0,912	0,730	0,456	●	○	○
P.1.4	0,912	0,730	0,456	●	○	○
P.1.5	0,912	0,730	0,456	●	○	○
P.2.1	0,912	0,730	0,456	●	○	○
P.2.2	0,912	0,730	0,456	●	○	○
P.2.3	0,912	0,730	0,456	●	○	○
P.2.4	0,912	0,730	0,456	●	○	○
P.3.1	0,912	0,730	0,456	●	○	○
P.3.2	0,912	0,730	0,456	●	○	○
P.3.3	0,912	0,730	0,456	●	○	○
P.4.1	0,912	0,730	0,456	●		
P.4.2	0,912	0,730	0,456	●		
M.1.1	0,912	0,730	0,456	●		
M.2.1	0,912	0,730	0,456	●		
M.3.1	0,912	0,730	0,456	●		
K.1.1	0,912	0,730	0,456	●	○	○
K.1.2	0,912	0,730	0,456	●	○	○
K.2.1	0,912	0,730	0,456	●	○	○
K.2.2	0,912	0,730	0,456	●	○	○
K.3.1	0,912	0,730	0,456	●	○	○
K.3.2	0,912	0,730	0,456	●	○	○
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3	0,912	0,730	0,456	●	○	○
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1	0,736	0,589	0,368		●	●
H.1.2	0,736	0,589	0,368		●	●
H.1.3						
H.1.4						
H.2.1	0,736	0,589	0,368		●	●
H.3.1	0,736	0,589	0,368		●	●
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – S-Cut – End mill, short – long

Index	Type short / long		52 205 ..., 52 223 ..., 52 224 ..., 52 225 ..., 52 228 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	150	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
P.1.2	150	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.1.3	130	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.1.4	140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.1.5	120	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.1	140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.2	120	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.3	140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.4	120	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.3.1	100	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
P.3.2	120	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	
P.3.3	100	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	
P.4.1	130	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
P.4.2	110	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
M.1.1	100	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
M.2.1	50	1,0	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035	
M.3.1	100	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
K.1.1	200	1,0	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081	
K.1.2	200	1,0	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081	
K.2.1	220	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
K.2.2	200	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
K.3.1	180	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
K.3.2	160	1,0	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
N.3.2	250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
N.3.3	250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
N.4.1																		
S.1.1	50	0,5	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035	
S.1.2	50	0,5	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035	
S.2.1	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	
S.2.2	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	
S.2.3	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	
S.3.1	120	0,5	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058	
S.3.2	110	0,5	0,029	0,022	0,016	0,040	0,031	0,022	0,058	0,043	0,029	0,076	0,056	0,038	0,104	0,081	0,058	
S.3.3	75	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	
H.1.1	120	0,5	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	
H.1.2	120	0,3	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	
H.1.3	120	0,2	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.
With an a_p of 2.0 x DC the f_z should be multiplied by 0.5.

Plunging angle for ramping and helical milling: 3°

Index	52 205 ..., 52 223 ..., 52 224 ..., 52 225 ..., 52 228 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	10			12			16			20			25						
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																		
P.1.1	0,161	0,115	0,081	0,173	0,127	0,029	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●	○	○
P.1.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.1.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.1.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.1.5	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
P.3.2	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
P.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
P.4.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
P.4.2	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
M.1.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
M.2.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
M.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
K.1.1	0,207	0,150	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,230	0,184	0,365	0,292	0,234	○	●	○
K.1.2	0,207	0,150	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,230	0,184	0,365	0,292	0,234	○	●	○
K.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	○	●	○
K.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	○	●	○
K.3.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	○	●	○
K.3.2	0,150	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,263	0,219	0,161	○	●	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,127	0,230	0,184	0,138	0,292	0,234	0,175	●		○
N.3.2	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,127	0,230	0,184	0,138	0,292	0,234	0,175	●		○
N.3.3	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●		○
N.4.1																		
S.1.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
S.1.2	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
S.2.1	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
S.2.2	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
S.2.3	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
S.3.1	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
S.3.2	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
S.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●		
H.1.1	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117		●	
H.1.2	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117		●	
H.1.3	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117		●	
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data standard values – S-Cut– End mill, extra long

Index	Type extra long			52 205 ..., 52 226 ..., 52 227 ...														
				Ø DC (mm) =														
				3			4			5			6			8		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC		f_z (mm)														
P.1.1	130	1,0	0,5	0,036	0,028	0,02	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
P.1.2	120	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.1.3	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.1.4	120	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.1.5	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.1	110	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.2	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.3	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.4	90	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.3.1	70	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
P.3.2	100	1,0	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
P.3.3	90	1,0	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
P.4.1	70	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
P.4.2	60	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
M.1.1	60	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
M.2.1	40	1,0	0,5	0,02	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,02	0,053	0,039	0,026	0,069	0,029	0,035
M.3.1	60	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
K.1.1	180	1,0	0,5	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081
K.1.2	140	1,0	0,5	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081
K.2.1	180	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
K.2.2	140	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
K.3.1	140	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
K.3.2	120	1,0	0,5	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	250	1,0	0,5	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
N.3.2	250	1,0	0,5	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
N.3.3	250	1,0	0,5	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
N.4.1																		
S.1.1	40	0,5	0,25	0,02	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,02	0,053	0,039	0,026	0,069	0,029	0,035
S.1.2	40	0,5	0,25	0,02	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,02	0,053	0,039	0,026	0,069	0,029	0,035
S.2.1	25	0,5	0,25	0,018	0,014	0,010	0,025	0,02	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
S.2.2	25	0,5	0,25	0,018	0,014	0,010	0,025	0,02	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
S.2.3	25	0,5	0,25	0,018	0,014	0,010	0,025	0,02	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
S.3.1	50	0,5	0,25	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058
S.3.2	40	0,5	0,25	0,029	0,022	0,016	0,040	0,031	0,022	0,058	0,043	0,029	0,076	0,056	0,038	0,104	0,081	0,058
S.3.3	40	0,5	0,25	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
H.1.1	100	0,5	0,5	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
H.1.2	100	0,5	0,3	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
H.1.3	100	0,5	0,15	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	52 205 ..., 52 226 ..., 52 227 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	10			12			16			20			25					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,161	0,115	0,081	0,173	0,127	0,029	0,184	0,15	0,115	0,23	0,184	0,138	0,276	0,23	0,184	●	○	○
P.1.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.1.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.1.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.1.5	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,15	0,115	●		
P.3.2	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
P.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
P.4.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
P.4.2	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
M.1.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
M.2.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,15	0,127	0,104	●		
M.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
K.1.1	0,207	0,15	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,23	0,184	0,345	0,288	0,230	○	●	○
K.1.2	0,207	0,15	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,23	0,184	0,345	0,288	0,230	○	●	○
K.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
K.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
K.3.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
K.3.2	0,15	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,242	0,207	0,173	○	●	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,15	0,127	0,23	0,184	0,138	0,276	0,230	0,184	●		○
N.3.2	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,15	0,127	0,23	0,184	0,138	0,276	0,230	0,184	●		○
N.3.3	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,15	0,115	0,23	0,184	0,138	0,276	0,230	0,184	●		○
N.4.1																		
S.1.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,15	0,127	0,104	●		
S.1.2	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,15	0,127	0,104	●		
S.2.1	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
S.2.2	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
S.2.3	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
S.3.1	0,127	0,092	0,069	0,138	0,104	0,069	0,15	0,115	0,092	0,184	0,15	0,115	0,219	0,184	0,15	●		
S.3.2	0,127	0,092	0,069	0,138	0,104	0,069	0,15	0,115	0,092	0,184	0,15	0,115	0,219	0,184	0,15	●		
S.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●		
H.1.1	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
H.1.2	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
H.1.3	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data standard values – S-Cut – End mills – SC-UNI, ZEFP = 5, long

Index	Type long	max. angle of engagement	52 230 ...															
			Ø DC (mm) =															
			6				8				10				12			
			a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m
	v_c (m/min)		f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
P.1.2	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.1.3	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.1.4	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.1.5	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.2.1	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
P.2.2	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
P.2.3	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.2.4	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.3.1	160	50°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
P.3.2	220	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.3.3	220	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.4.1	180	50°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
P.4.2	180	50°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
M.1.1	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
M.2.1	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
M.3.1	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
K.1.1	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.1.2	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.2.1	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.2.2	260	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.3.1	260	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
K.3.2	200	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	140	40°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
S.1.2	140	40°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
S.2.1	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
S.2.2	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
S.2.3	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
S.3.1	140	40°	0,045	0,032	0,026	0,010	0,072	0,051	0,041	0,016	0,089	0,063	0,052	0,020	0,112	0,079	0,065	0,025
S.3.2	120	40°	0,045	0,032	0,026	0,010	0,072	0,051	0,041	0,016	0,089	0,063	0,052	0,020	0,112	0,079	0,065	0,025
S.3.3	100	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting depth corresponding to the cutting length

Index	52 230 ... Ø DC (mm) = 16 a_p 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	20 a_p 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				● 1st choice ○ suitable		
P.1.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
P.1.2	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.1.3	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.1.4	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.1.5	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.2.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
P.2.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
P.2.3	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.2.4	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.3.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
P.3.2	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.3.3	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.4.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
P.4.2	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
M.1.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
M.2.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
M.3.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
K.1.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.1.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.2.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.2.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.3.1	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
K.3.2	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
S.1.2	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
S.2.1	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
S.2.2	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
S.2.3	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
S.3.1	0,157	0,111	0,090	0,035	0,219	0,155	0,127	0,049	●		
S.3.2	0,157	0,111	0,090	0,035	0,219	0,155	0,127	0,049	●		
S.3.3	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

Cutting data standard values – 3D Finish – barrel shape

Index	v_c (m/min)	52 739 ... Ø DC (mm) = 10 a_e 0,05–0,10 f_z (mm)	a_e 0,10–0,20 f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	280	0,07	0,06	●	●	○
P.1.2	250	0,07	0,05	●	●	○
P.1.3	250	0,07	0,05	●	●	○
P.1.4	250	0,07	0,05	●	●	○
P.1.5	250	0,07	0,05	●	●	○
P.2.1	250	0,07	0,05	●	●	○
P.2.2	250	0,07	0,05	●	●	○
P.2.3	210	0,06	0,04	●	●	○
P.2.4	210	0,06	0,04	●	●	○
P.3.1	210	0,06	0,04	●	●	○
P.3.2	200	0,05	0,03		●	
P.3.3	200	0,05	0,03		●	
P.4.1	80	0,05	0,03	●		○
P.4.2	80	0,05	0,03	●		○
M.1.1	60	0,04	0,02	●		○
M.2.1	60	0,04	0,02	●		○
M.3.1	60	0,04	0,02	●		○
K.1.1	280	0,08	0,06		●	
K.1.2	280	0,08	0,06		●	
K.2.1	250	0,07	0,05		●	
K.2.2	250	0,07	0,05		●	
K.3.1	140	0,04	0,03		●	
K.3.2	140	0,04	0,03		●	
N.1.1	600	0,07	0,05	●		○
N.1.2	600	0,06	0,04	●		○
N.2.1	410	0,07	0,05	●		○
N.2.2						
N.2.3						
N.3.1	180	0,08	0,06	●	○	○
N.3.2	180	0,08	0,06	●		○
N.3.3	180	0,08	0,06	●		○
N.4.1	410	0,10	0,08	●		○
S.1.1	30	0,04	0,02	●		
S.1.2	30	0,04	0,02	●		
S.2.1	30	0,04	0,02	●		
S.2.2	30	0,04	0,02	●		
S.2.3	30	0,04	0,02	●		
S.3.1	100	0,04	0,02	●		
S.3.2	80	0,04	0,02	●		
S.3.3	60	0,04	0,02	●		
H.1.1	100	0,05	0,03		●	
H.1.2						
H.1.3						
H.1.4						
H.2.1	130	0,05	0,03		●	
H.3.1	100	0,05	0,03		●	
O.1.1	410	0,10	0,08	●	○	○
O.1.2	600	0,10	0,08	●		○
O.2.1						
O.2.2						
O.3.1						

In order to calculate the rotational speed n, the diameter DC has to be used.

Cutting data standard values – 3D Finish – oval shape

Index	v_c (m/min)	52 745 ...															● 1st choice ○ suitable		
		Ø DC (mm) =																	
		6			8			10			12			16					
		a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	Emulsion	Compressed air	MMS
		f_z (mm)																	
P.1.1	280	0,04	0,04	0,04	0,06	0,06	0,05	0,07	0,07	0,06	0,08	0,08	0,07	0,11	0,11	0,10	●	●	○
P.1.2	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.1.3	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.1.4	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.1.5	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.2.1	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.2.2	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.2.3	210	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●	●	○
P.2.4	210	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●	●	○
P.3.1	210	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●	●	○
P.3.2	200	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
P.3.3	200	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
P.4.1	80	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		○
P.4.2	80	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		○
M.1.1	60	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		○
M.2.1	60	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		○
M.3.1	60	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		○
K.1.1	280	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10		●	
K.1.2	280	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10		●	
K.2.1	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08		●	
K.2.2	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08		●	
K.3.1	140	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03		●	
K.3.2	140	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03		●	
N.1.1	600	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●		○
N.1.2	600	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●		○
N.2.1	410	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●		○
N.2.2																			
N.2.3																			
N.3.1	180	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10	●	○	○
N.3.2	180	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10	●		○
N.3.3	180	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10	●		○
N.4.1	410	0,06	0,05	0,05	0,08	0,06	0,06	0,10	0,08	0,08	0,12	0,10	0,10	0,16	0,13	0,13	●		○
S.1.1	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.1.2	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.2.1	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.2.2	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.2.3	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.3.1	100	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●		
S.3.2	80	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		
S.3.3	60	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		
H.1.1	100	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1	130	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
H.3.1	100	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
O.1.1	410	0,06	0,05	0,05	0,08	0,06	0,06	0,10	0,08	0,08	0,12	0,10	0,10	0,16	0,13	0,13	●	○	○
O.1.2	600	0,06	0,05	0,05	0,08	0,06	0,06	0,10	0,08	0,08	0,12	0,10	0,10	0,16	0,13	0,13	●		○
O.2.1																			
O.2.2																			
O.3.1																			

In order to calculate the rotational speed n, the diameter DC has to be used.

14

Cutting data standard values – 3D Finish – taper shape

Index	v_c (m/min)	52 753 ..., 52 755 ...										● 1st choice ○ suitable		
		Ø DC (mm) =												
		6		8		10		12		16				
		a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	Emulsion	Compressed air	MMS
		f_z (mm)												
P.1.1	280	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.2	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.3	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.4	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.5	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.2.1	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.2.2	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.2.3	210	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,08	0,05	●	●	○
P.2.4	210	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,08	0,05	●	●	○
P.3.1	210	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,08	0,05	●	●	○
P.3.2	200	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
P.3.3	200	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
P.4.1	80	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	●		○
P.4.2	80	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	●		○
M.1.1	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		○
M.2.1	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		○
M.3.1	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		○
K.1.1	280	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,11	0,08		●	
K.1.2	280	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,11	0,08		●	
K.2.1	250	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08		●	
K.2.2	250	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08		●	
K.3.1	140	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03		●	
K.3.2	140	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03		●	
N.1.1	600	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●		○
N.1.2	600	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	●		○
N.2.1	410	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●		○
N.2.2														
N.2.3														
N.3.1	180	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08	●	○	○
N.3.2	180	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08	●		○
N.3.3	180	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08	●		○
N.4.1	410	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	0,16	0,13	●		○
S.1.1	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.1.2	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.2.1	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.2.2	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.2.3	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.3.1	100	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.3.2	80	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.3.3	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
H.1.1	100	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
H.1.2														
H.1.3														
H.1.4														
H.2.1	130	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
H.3.1	100	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
O.1.1	410	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	0,16	0,13	●	○	○
O.1.2	600	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	0,16	0,13	●		○
O.2.1														
O.2.2														
O.3.1														

In order to calculate the rotational speed n, the diameter DC has to be used.

Cutting data standard values – 3D Finish – lens shape

Index	v_c (m/min)	52 756 ...										● 1st choice ○ suitable		
		Ø DC (mm) =												
		4		6		8		10		12				
		Aufmaß												
		0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	Emulsion	Compressed air	MMS
		f_z (mm)												
P.1.1	280	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.2	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.3	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.4	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.5	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.2.1	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.2.2	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.2.3	200	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●	●	○
P.2.4	200	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●	●	○
P.3.1	200	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●	●	○
P.3.2	180	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04		●	
P.3.3	180	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04		●	
P.4.1	120	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		○
P.4.2	120	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		○
M.1.1	90	0,02	0,01	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,02	●		○
M.2.1	90	0,02	0,01	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,02	●		○
M.3.1	90	0,02	0,01	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,02	●		○
K.1.1	300	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07		●	
K.1.2	300	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07		●	
K.2.1	270	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06		●	
K.2.2	270	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06		●	
K.3.1	150	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04		●	
K.3.2	150	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04		●	
N.1.1	900	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●		○
N.1.2	900	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●		○
N.2.1	600	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●		○
N.2.2														
N.2.3														
N.3.1	270	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07	●	○	○
N.3.2	270	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07	●		○
N.3.3	270	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07	●		○
N.4.1	600	0,04	0,03	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	●		○
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	150	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●		
S.3.2	120	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		
S.3.3	90	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

In order to calculate the rotational speed n, the diameter DC has to be used.

14

Cutting data standard values – PCD milling cutter

Index	v_c (m/min)	50 011 ..., 50 012 ...		50 010 ..., 50 013 ...		50 014 ...		50 015 ...			
		$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e
N.1.1	900	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.1.2	900	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.2.1	700	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.2.2	600	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.2.3	400	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.3.1	500							0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.3.2											
N.3.3											
N.4.1	900							0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.1.1	120	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.1.2	250	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.2.1											
O.2.2	200–300	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.3.1	650	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC

Index	v_c (m/min)	50 016 ..., 50 017 ...				50 018 ...				50 020 ...			
		$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e
N.1.1	900	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.1.2	900	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.2.1	700	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.2.2	600	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.2.3	400	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.3.1	500	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.3.2													
N.3.3													
N.4.1	900	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.1.1	120	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.1.2	250	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.2.1													
O.2.2	200–300	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.3.1	650	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC

● 1st choice
○ suitable

Index	v_c (m/min)	50 019 ...				Ø DC (mm) =						Emulsion	Compressed air	MMS
						40	50	63	80	100	125			
		$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	f_z (mm)								
N.1.1	2200	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.1.2	2100	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.2.1	1850	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.2.2	1850	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.2.3	1750	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.3.1	1000–1500	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.3.2														
N.3.3														
N.4.1	2200	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
O.1.1														
O.1.2														
O.2.1														
O.2.2	500–600	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,230	0,230	0,230	0,230	0,230	0,230	●		○
O.3.1														

Index	50 010 ..., 50 011 ..., 50 012 ..., 50 013 ..., 50 014 ..., 50 015 ...												● 1st choice ○ suitable		
	Ø DC (mm) =												Emulsion	Compressed air	MMS
	2	3	4	5	6	8	10	12	16	20	25	32			
	f_z (mm)														
N.1.1	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.1.2	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.1	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.2	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.3	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.2															
N.3.3															
N.4.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
O.1.1	0,025	0,038	0,050	0,071	0,100	0,150	0,200	0,250	0,300	0,400	0,440	0,460	●		○
O.1.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○
O.2.1															
O.2.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,20	0,220	0,260	●		○
O.3.1	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,20	0,220	0,260	●		○

Index	50 016 ..., 50 017 ..., 50 018 ..., 50 020 ...												● 1st choice ○ suitable		
	Ø DC (mm) =												Emulsion	Compressed air	MMS
	2	3	4	5	6	8	10	12	16	20	25	32			
	f_z (mm)														
N.1.1	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.1.2	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.1	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.2	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.3	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.2															
N.3.3															
N.4.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
O.1.1	0,025	0,038	0,050	0,0705	0,100	0,150	0,200	0,250	0,300	0,400	0,440	0,460	●		○
O.1.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○
O.2.1															
O.2.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○
O.3.1	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○

Cutting data standard values – AluLine – End mills – ZEFP = 2

Index	Type short		Medium-length version		53 623..., 53 624..., 53 625..., 53 626..., 53 633..., 53 634..., 53 635..., 53 636..., 53 619..., 53 620..., 53 621..., 53 622..., 53 629..., 53 630..., 53 631..., 53 632..., 52 627..., 53 628..., 53 637..., 53 638...																	
					Ø DC (mm) =																	
					2			2,5–3,0			3,5–4,0			4,5–5,0			5,5–6,0			6,5–8,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
					f_z (mm)																	
N.1.1	600	1,0	360	0,7	0,032	0,027	0,021	0,045	0,039	0,030	0,057	0,049	0,038	0,071	0,061	0,047	0,084	0,073	0,056	0,110	0,095	0,073
N.1.2	600	1,0	360	0,7	0,032	0,027	0,021	0,045	0,039	0,030	0,057	0,049	0,038	0,071	0,061	0,047	0,084	0,073	0,056	0,110	0,095	0,073
N.2.1	360	1,0	215	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.2.2	360	1,0	215	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.2.3	240	1,0	145	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.3.1	240	1,0	145	0,7	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039	0,078	0,068	0,052
N.3.2	240	1,0	145	0,7	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039	0,078	0,068	0,052
N.3.3	170	1,0	100	0,7	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039	0,078	0,068	0,052
N.4.1	220	1,0	130	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063

Cutting data standard values – AluLine – End mill – ZEFP = 3

Index	Type short / medium length		Type long		Type extra long		53 615..., 53 616..., 53 617..., 53 618..., 53 611..., 53 612..., 53 613..., 53 614..., 53 712..., 53 713..., 53 714..., 53 715..., 53 708..., 53 709..., 53 710..., 53 711..., 53 584..., 53 597...,													
							Ø DC (mm) =															
							2			2,5–3,0			3,5–4,0			4,5–5,0			5,5–6,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)															
N.1.1	600	1,0	480	0,8	240	0,6	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047
N.1.2	600	1,0	480	0,8	240	0,6	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047
N.2.1	360	1,0	290	0,8	145	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044
N.2.2	360	1,0	290	0,8	145	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044
N.2.3	240	1,0	190	0,8	95	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044
N.3.1	240	1,0	190	0,8	95	0,6	0,015	0,013	0,010	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033
N.3.2	240	1,0	190	0,8	95	0,6	0,015	0,013	0,010	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033
N.3.3	170	1,0	135	0,8	70	0,6	0,015	0,013	0,010	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033
N.4.1	220	1,0	175	0,8	90	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044

Cutting data standard values – AluLine – End mill – ZEFP = 4

Index	Type short / medium length		Type long		Type extra long		53 700..., 53 701..., 53 702..., 53 703..., 53 704..., 53 705..., 53 706..., 53 707..., 53 560..., 53 561..., 53 562..., 53 563..., 53 564..., 53 565..., 53 566..., 53 567..., 53 568..., 53 569...													
							Ø DC (mm) =															
							2			3,0			4,0			5,0			6,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)															
N.1.1	600	1,0	480	0,8	240	0,6	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039
N.1.2	600	1,0	480	0,8	240	0,6	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039
N.2.1	360	1,0	290	0,8	145	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035
N.2.2	480	1,0	385	0,8	145	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035
N.2.3	240	1,0	190	0,8	95	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035
N.3.1	240	1,0	190	0,8	95	0,6	0,014	0,012	0,009	0,021	0,018	0,014	0,029	0,025	0,019	0,037	0,032	0,025	0,045	0,039	0,030
N.3.2	240	1,0	190	0,8	95	0,6	0,014	0,012	0,009	0,021	0,018	0,014	0,029	0,025	0,019	0,037	0,032	0,025	0,045	0,039	0,030
N.3.3	170	1,0	135	0,8	70	0,6	0,014	0,012	0,009	0,021	0,018	0,014	0,029	0,025	0,019	0,037	0,032	0,025	0,045	0,039	0,030
N.4.1	220	1,0	175	0,8	90	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035

53 623..., 53 624..., 53 625..., 53 626..., 53 633..., 53 634..., 53 635..., 53 636..., 53 619..., 53 620..., 53 621..., 53 622..., 53 629..., 53 630..., 53 631..., 53 632..., 52 627..., 53 628..., 53 637..., 53 638...

● 1st choice
○ suitable

Index	Ø DC (mm) = 8,5–10,0			10,5–12,0			12,5–14,0			14,5–16,0			16,5–18,0			18,5–20,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																				
N.1.1	0,137	0,118	0,091	0,162	0,140	0,108	0,189	0,164	0,126	0,203	0,176	0,135	0,216	0,187	0,144	0,230	0,199	0,153	●	○*	○
N.1.2	0,137	0,118	0,091	0,162	0,140	0,108	0,189	0,164	0,126	0,203	0,176	0,135	0,216	0,187	0,144	0,230	0,199	0,153	●	○*	○
N.2.1	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.2.2	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.2.3	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.3.1	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.3.2	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.3.3	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.4.1	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○

* = only suitable for DLC-coated cutters

53 598..., 53 599..., 53 578..., 53 579..., 53 580.../ 53 581..., 53 517..., 53 518..., 53 519..., 53 520..., 53 521..., 53 522..., 53 523..., 53 524...

● 1st choice
○ suitable

Index	Ø DC (mm) = 6,5–8,0			8,5–10,0			10,5–12,0			12,5–14,0			14,5–16,0			16,5–18,0			18,5–20,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																							
N.1.1	0,095	0,082	0,063	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.1.2	0,095	0,082	0,063	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.2.1	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○
N.2.2	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○
N.2.3	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○
N.3.1	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,134	0,116	0,089	0,141	0,122	0,094	●	○*	○
N.3.2	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,134	0,116	0,089	0,141	0,122	0,094	●	○*	○
N.3.3	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,134	0,116	0,089	0,141	0,122	0,094	●	○*	○
N.4.1	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○

* = only suitable for DLC-coated cutters

53 700..., 53 701..., 53 702..., 53 703..., 53 704..., 53 705..., 53 706..., 53 707..., 53 560..., 53 561..., 53 562..., 53 563..., 53 564..., 53 565..., 53 566..., 53 567..., 53 568..., 53 569...

● 1st choice
○ suitable

Index	Ø DC (mm) = 8,0			8,5–10,0			12,0			14,0			16,0			18,0			120,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																							
N.1.1	0,078	0,068	0,052	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.1.2	0,078	0,068	0,052	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.2.1	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○
N.2.2	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○
N.2.3	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○
N.3.1	0,060	0,052	0,040	0,075	0,065	0,050	0,090	0,078	0,060	0,105	0,091	0,070	0,113	0,098	0,075	0,120	0,104	0,080	0,128	0,111	0,085	●	○*	○
N.3.2	0,060	0,052	0,040	0,075	0,065	0,050	0,090	0,078	0,060	0,105	0,091	0,070	0,113	0,098	0,075	0,120	0,104	0,080	0,128	0,111	0,085	●	○*	○
N.3.3	0,060	0,052	0,040	0,075	0,065	0,050	0,090	0,078	0,060	0,105	0,091	0,070	0,113	0,098	0,075	0,120	0,104	0,080	0,128	0,111	0,085	●	○*	○
N.4.1	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○

* = only suitable for DLC-coated cutters

Cutting data standard values – AluLine – Roughing-finishing milling cutter

Index	Type short / long		Medium-length version		53 582 ..., 53 583 ...															
					Ø DC (mm) =															
					3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
					f_z (mm)															
N.1.1	600	1,0	480	0,8	0,114	0,099	0,076	0,131	0,113	0,087	0,147	0,127	0,098	0,162	0,140	0,108	0,195	0,169	0,130
N.1.2	600	1,0	480	0,8	0,114	0,099	0,076	0,131	0,113	0,087	0,147	0,127	0,098	0,162	0,140	0,108	0,195	0,169	0,130
N.2.1	360	1,0	290	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108
N.2.2	360	1,0	290	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108
N.2.3	240	1,0	190	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108
N.3.1	240	1,0	190	0,8	0,049	0,042	0,033	0,065	0,056	0,043	0,081	0,070	0,054	0,098	0,085	0,065	0,129	0,112	0,086
N.3.2	240	1,0	190	0,8	0,049	0,042	0,033	0,065	0,056	0,043	0,081	0,070	0,054	0,098	0,085	0,065	0,129	0,112	0,086
N.3.3	170	1,0	135	0,8	0,049	0,042	0,033	0,065	0,056	0,043	0,081	0,070	0,054	0,098	0,085	0,065	0,129	0,112	0,086
N.4.1	220	1,0	175	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108

Cutting data – AluLine – Ball Nosed End Mills

Index	Type short		Type long		Type extra long		53 607 ..., 53 608 ..., 53 609 ..., 53 610 ...														
							Ø DC (mm) =														
							3			4			5			6			8		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)														
N.1.1	750	0,03	450	0,02	225	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.1.2	750	0,03	450	0,02	225	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.2.1	600	0,03	360	0,02	180	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
N.2.2	600	0,03	360	0,02	180	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
N.2.3	400	0,03	240	0,02	120	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
N.3.1	180	0,03	110	0,02	55	0,015	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044
N.3.2	180	0,03	110	0,02	55	0,015	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044
N.3.3	230	0,03	140	0,02	70	0,015	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044
N.4.1	350	0,03	210	0,02	105	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
O.1.1	65	0,03	40	0,03	40	0,03				0,135	0,104	0,075	0,200	0,149	0,100	0,240	0,179	0,120	0,300	0,224	0,150
O.1.2	240	0,03	145	0,03	145	0,03				0,135	0,104	0,075	0,200	0,149	0,100	0,240	0,179	0,120	0,300	0,224	0,150

Cutting data – AluLine – High Accuracy Finishing Cutters

Index	Type short	Type long	Type extra long		53 639 ...															
					Ø DC (mm) =															
					6			8			10			12			16			
	v_c (m/min)			$a_{p\,max.}$ x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC
					f_z (mm)															
N.1.1	500	400	300	2,0	0,036	0,031	0,024	0,047	0,040	0,031	0,056	0,049	0,038	0,067	0,058	0,045	0,083	0,072	0,055
N.1.2	500	400	300	2,0	0,036	0,031	0,024	0,047	0,040	0,031	0,056	0,049	0,038	0,067	0,058	0,045	0,083	0,072	0,055
N.2.1	300	240	180	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.2.2	300	240	180	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.2.3	210	170	125	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.3.1	210	170	125	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.3.2	210	170	125	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.3.3	150	120	90	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.4.1	200	160	120	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045

Index	53 582 ..., 53 583 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
N.1.1	0,225	0,195	0,150	0,258	0,224	0,172	0,305	0,264	0,203	0,336	0,291	0,224	●		
N.1.2	0,225	0,195	0,150	0,258	0,224	0,172	0,305	0,264	0,203	0,336	0,291	0,224	●		
N.2.1	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		
N.2.2	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		
N.2.3	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		
N.3.1	0,161	0,139	0,107	0,194	0,168	0,129	0,240	0,208	0,160	0,272	0,235	0,181	●		
N.3.2	0,161	0,139	0,107	0,194	0,168	0,129	0,240	0,208	0,160	0,272	0,235	0,181	●		
N.3.3	0,161	0,139	0,107	0,194	0,168	0,129	0,240	0,208	0,160	0,272	0,235	0,181	●		
N.4.1	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		

Index	53 607 ..., 53 608 ..., 53 609 ..., 53 610 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	10			12			14			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
N.1.1	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,206	0,178	0,137	●	○	
N.1.2	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,206	0,178	0,137	●	○	
N.2.1	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
N.2.2	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
N.2.3	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
N.3.1	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,141	0,122	0,094	●	○	
N.3.2	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,141	0,122	0,094	●	○	
N.3.3	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,141	0,122	0,094	●	○	
N.4.1	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
O.1.1	0,400	0,298	0,200	0,500	0,373	0,250	0,548	0,424	0,300	0,592	0,452	0,350	0,712	0,581	0,450	●	○	
O.1.2	0,400	0,298	0,200	0,500	0,373	0,250	0,548	0,424	0,300	0,592	0,452	0,350	0,712	0,581	0,450	●	○	

Index	53 639 ...			● 1st choice ○ suitable		
	Ø DC (mm) =					
	10					
	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)					
N.1.1	0,092	0,080	0,062	●		○
N.1.2	0,092	0,080	0,062	●		○
N.2.1	0,077	0,066	0,051	●		○
N.2.2	0,077	0,066	0,051	●		○
N.2.3	0,077	0,066	0,051	●		○
N.3.1	0,077	0,066	0,051	●		○
N.3.2	0,077	0,066	0,051	●		○
N.3.3	0,077	0,066	0,051	●		○
N.4.1	0,077	0,066	0,051	●		○

Cutting data – Cutters for plastic machining

Index	Strength N/mm² – HB	50 983 ..., 50 984 ..., 50 985 ..., 50 986 ..., 50 932 ...	50 937 ...	50 936 ...	50 938 ...	50 610 ..., 50 611 ..., 50 76. ...	50 91. ...	50 946 ...	50 948 ...	50 947 ...
		f_z (mm)								
N.1.1	60 HB					400–450	400–450			
N.1.2	340 N/mm² / 100 HB					400–450	400–450			
N.2.1	250 N/mm² / 75 HB					350–400	350–400			
N.2.2	300 N/mm² / 90 HB				300–400			300–400	300–400	300–400
N.2.3	440 N/mm² / 130 HB				300–400			250–300	250–300	250–300
N.3.1	375 N/mm² / 110 HB					350–400	350–400			
N.3.2	300 N/mm² / 90 HB					400–450	400–450			
N.3.3	340 N/mm² / 100 HB					400–450	400–450			
N.4.1	70 HB				250			250	250	250
O.1.1	≤ 150 N/mm²	300–350	300–350			500–550	500–550			
O.1.2	≤ 100 N/mm²					500–550	500–550			
O.2.1	≤ 1000 N/mm²	150–200	150–200	500–600	150–200			150–200	150–200	150–200
O.2.2	≤ 1000 N/mm²	150–200	150–200	500–600	150–200			150–200	150–200	150–200
O.3.1		300–400	500–600	500–600	300–400		300	300–400		300–400

DC in mm	Plastics, Thermoset, Hardwood, Pressed Cardboard					Plastic, Thermoplast, Polycarbonate, Non-ferrous metal, Hard rubber				
	End milling cutter Type W			Ball nosed cutter Type W		End milling cutter Type W			Ball nosed cutter Type W	
	Shoulder milling, trimming		Slot milling	Copy milling – Line milling		Shoulder milling, trimming		Slot milling	Copy milling – Line milling	
	Roughing	Finishing		Roughing	Finishing	Roughing	Finishing		Roughing	Finishing
	a_p = 1,0 x DC	a_p = 1,0 x DC		a_e = 0,5 x DC	a_e = 0,03 x DC	a_e = 1,5 x DC	a_p = 1,0 x DC		a_e = 0,5 x DC	a_e = 0,03 x DC
	a_e = 0,4 x DC	a_e = 0,1 x DC		a_e = 0,5 x DC	a_e = 0,02 x DC	a_e = 0,8 x DC	a_e = 0,1 x DC		a_e = 0,5 x DC	a_e = 0,02 x DC
	f_z (mm)									
2	0,024	0,018	0,016	0,028	0,024	0,024	0,022	0,017	0,037	0,030
3	0,036	0,027	0,024	0,042	0,036	0,036	0,033	0,026	0,056	0,045
4	0,048	0,036	0,032	0,056	0,048	0,048	0,044	0,034	0,074	0,060
5	0,060	0,045	0,040	0,070	0,060	0,060	0,055	0,043	0,093	0,075
6	0,072	0,054	0,048	0,084	0,072	0,072	0,066	0,051	0,111	0,090
8	0,100	0,070	0,060	0,110	0,100	0,100	0,090	0,070	0,150	0,120
10	0,120	0,090	0,080	0,140	0,120	0,120	0,110	0,090	0,190	0,150
12	0,140	0,110	0,100	0,170	0,140	0,140	0,130	0,100	0,220	0,180
14	0,170	0,130	0,110	0,200	0,170	0,170	0,150	0,120	0,260	0,210
16	0,190	0,140	0,130	0,220	0,190	0,190	0,180	0,140	0,300	0,240
18	0,220	0,160	0,140	0,250	0,220	0,220	0,200	0,150	0,330	0,270
20	0,240	0,180	0,160	0,280	0,240	0,240	0,220	0,170	0,370	0,300

DC in mm	Fiber reinforced plastics AFK, CFK, GFK			
	End mill staggered teeth			
	Shoulder milling, trimming		Slot milling	
	a_p = 1,0 x DC		a_p = 0,35 x DC	
	a_e = 0,4 x DC			
	fine	medium	fine	medium
	f_z (mm)			
2	0,16	0,14	0,14	0,12
3	0,24	0,21	0,21	0,18
4	0,32	0,28	0,28	0,24
5	0,40	0,35	0,35	0,30
6	0,48	0,42	0,42	0,36
8	0,64	0,56	0,56	0,48
10	0,80	0,70	0,70	0,60
12	0,96	0,84	0,84	0,72
16	1,28	1,12	1,12	0,96
20	1,60	1,40	1,40	1,20

Feedrate values for ball nosed and torus cutters on → **page 486**

Cutting data standard values – AluLine – NC deburring cutter

Index	v_c (m/min)	53 660 ..., 53 661 ..., 53 662 ..., 53 663 ... DLC Ø DC (mm) = 4	6	8	10	12	16	v_c (m/min)	53 664 ..., 53 665 ..., 53 666 ..., 53 667 ... uncoated Ø DC (mm) = 4	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)							f_z (mm)								
N.1.1	300	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.1.2	300	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.2.1	260	0,03	0,04	0,05	0,06	0,07	0,08	170	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.2.2	280	0,03	0,04	0,05	0,06	0,07	0,08	180	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.2.3	250	0,03	0,04	0,05	0,06	0,07	0,08	165	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.3.1	110	0,03	0,04	0,05	0,06	0,07	0,08	75	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.3.2	140	0,03	0,04	0,05	0,06	0,07	0,08	90	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.3.3	120	0,03	0,04	0,05	0,06	0,07	0,08	80	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.4.1																	
O.1.1	320	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○	○
O.1.2	320	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○	○
O.2.1																	
O.2.2																	
O.3.1																	

* = only suitable for DLC-coated cutters

Cutting data standard values – BlueLine – NC deburring cutter

Index	v_c (m/min)	52 560 ..., 52 561 ..., 52 562 ..., 52 563 ... Ti2000 Ø DC (mm) = 4	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)								
P.3.2	80	0,02	0,02	0,025	0,03	0,04	0,05		●	
P.3.3	70	0,02	0,02	0,025	0,03	0,04	0,05		●	
H.1.1	120	0,045	0,055	0,06	0,065	0,065	0,07		●	
H.1.2	90	0,04	0,05	0,055	0,06	0,06	0,065		●	
H.1.3	70	0,035	0,045	0,05	0,055	0,055	0,06		●	
H.1.4	50	0,025	0,03	0,04	0,045	0,045	0,05		●	
H.2.1										
H.3.1										

14

Cutting data standard values – BlueLine – Micro-end mill / micro-torus cutter

Index	$T_X \leq 2,5$ x DC		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	190	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,018	0,0195	0,0210	0,0225	0,0240	●
P.3.3	190	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,018	0,0195	0,0210	0,0225	0,0240	●
H.1.1	120	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,018	0,0195	0,0210	0,0225	0,0240	●
H.1.2	70	0,5	0,0030	0,0360	0,0045	0,0062	0,0074	0,0104	0,0132	0,0144	0,0156	0,0168	0,0180	0,0192	●
H.1.3	50	0,5	0,0025	0,0030	0,0040	0,0052	0,0062	0,0087	0,0110	0,0120	0,0130	0,0140	0,0150	0,0160	●
H.1.4															
H.2.1	190	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240	●
H.3.1	70	0,5	0,0030	0,0360	0,0045	0,0062	0,0074	0,0104	0,0132	0,0144	0,0156	0,0168	0,0180	0,0192	●

Index	$T_X \leq 2,6–5,0$ x DC		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	170	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
P.3.3	170	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
H.1.1	108	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
H.1.2	63	0,5	0,0030	0,0032	0,0036	0,0050	0,0060	0,0082	0,0107	0,0121	0,0126	0,0140	0,0156	0,0156	●
H.1.3	45	0,5	0,0025	0,0027	0,0030	0,0042	0,0050	0,0068	0,0089	0,0101	0,0105	0,0117	0,0130	0,0130	●
H.1.4															
H.2.1	170	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
H.3.1	63	0,5	0,0030	0,0032	0,0036	0,0050	0,0060	0,0082	0,0107	0,0121	0,0126	0,0140	0,0156	0,0156	●

Index	$T_X \leq 5,1–10,0$ x DC		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	150	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,012	0,0128	●
P.3.3	150	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,012	0,0128	●
H.1.1	96	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128	●
H.1.2	56	0,5	0,0024	0,0030	0,0036	0,0048	0,0054	0,0060	0,0066	0,0072	0,0084	0,0090	0,0096	0,0102	●
H.1.3	40	0,5	0,0020	0,0025	0,0030	0,0040	0,0045	0,0050	0,0055	0,0060	0,0070	0,0075	0,0080	0,0085	●
H.1.4															
H.2.1	150	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128	●
H.3.1	56	0,5	0,0024	0,0030	0,0036	0,0048	0,0054	0,0060	0,0066	0,0072	0,0084	0,0090	0,0096	0,0102	●

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	114	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
P.3.3	114	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
H.1.1	72	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
H.1.2	42	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	0,0053	●
H.1.3	30	0,5	0,0010	0,0015	0,0020	0,0025	0,0030	0,0032	0,0034	0,0036	0,0038	0,0040	0,0042	0,0044	●
H.1.4															
H.2.1	114	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
H.3.1	42	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	0,0053	●

Index	$T_x \leq 15{,}1–20{,}0 \times DC$		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	75	0,5	0,0015	0,0015	0,0023	0,003	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
P.3.3	75	0,5	0,0015	0,0015	0,0023	0,003	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
H.1.1	48	0,5	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
H.1.2	28	0,5	0,0012	0,0012	0,0018	0,0024	0,003	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	●
H.1.3	20	0,5	0,0010	0,0010	0,0015	0,0020	0,0025	0,0030	0,0032	0,0034	0,0036	0,0038	0,0040	0,0042	●
H.1.4															
H.2.1	75	0,5	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
H.3.1	28	0,5	0,0012	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	●

Index	$T_x \leq 20{,}1–30{,}0 \times DC$		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	57	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
P.3.3	57	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
H.1.1	36	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
H.1.2	21	0,5	0,0010	0,001	0,0020	0,0020	0,0020	0,0030	0,0030	0,0030	0,0030	0,004	0,0040	0,0040	●
H.1.3	15	0,5	0,0008	0,001	0,0013	0,0017	0,0019	0,0022	0,0025	0,0027	0,0029	0,003	0,0031	0,0032	●
H.1.4															
H.2.1	57	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
H.3.1	21	0,5	0,0010	0,001	0,0020	0,0020	0,0020	0,0030	0,0030	0,0030	0,0030	0,004	0,0040	0,0040	●

Cutting data standard values – BlueLine – Micro-ball-nosed end mill

Index	$T_X \leq 2,5 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											Compressed air
P.3.2	190	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
P.3.3	190	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
H.1.1	120	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
H.1.2	70	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0042	0,0048	0,0050	0,0053	0,0055	0,0058	0,0060	●
H.1.3	50	0,5	0,0010	0,0015	0,0020	0,0025	0,0030	0,0035	0,0040	0,0042	0,0044	0,0046	0,0048	0,0050	●
H.1.4															
H.2.1	190	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
H.3.1	70	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0042	0,0048	0,0050	0,0053	0,0055	0,0058	0,0060	●

Index	$T_X \leq 2,6–5,0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											Compressed air
P.3.2	170	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
P.3.3	170	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
H.1.1	108	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
H.1.2	63	0,5	0,0008	0,0011	0,0014	0,0018	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032	0,0038	●
H.1.3	45	0,5	0,0007	0,0009	0,0012	0,0015	0,0017	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032	●
H.1.4															
H.2.1	170	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
H.3.1	63	0,5	0,0008	0,0011	0,0014	0,0018	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032	0,0038	●

Index	$T_X \leq 5,1–10,0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											Compressed air
P.3.2	150	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039	●
P.3.3	150	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039	●
H.1.1	96	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	0,0036	0,0039	●
H.1.2	56	0,5	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0024	0,0026	0,0029	0,0031	●
H.1.3	40	0,5	0,0004	0,0006	0,0008	0,0010	0,0012	0,0014	0,0016	0,0018	0,0020	0,0022	0,0024	0,0026	●
H.1.4															
H.2.1	150	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039	●
H.3.1	56	0,5	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0024	0,0026	0,0029	0,0031	●

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	114	0,5	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
P.3.3	114	0,5	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
H.1.1	72	0,5	0,0003	0,0006	0,0008	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
H.1.2	42	0,5	0,0002	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0022	0,0026	0,0029	●
H.1.3	30	0,5	0,0002	0,0004	0,0006	0,0008	0,0010	0,0012	0,0014	0,0016	0,0018	0,0020	0,0022	0,0024	●
H.1.4															
H.2.1	114	0,5	0,0003	0,0006	0,0008	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
H.3.1	42	0,5	0,0002	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0022	0,0026	0,0029	●

Index	$T_x \leq 15{,}1–20{,}0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	114	0,5	0,0002	0,0004	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
P.3.3	114	0,5	0,0002	0,0004	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
H.1.1	72	0,5	0,0002	0,0004	0,0005	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
H.1.2	42	0,5	0,0001	0,0003	0,0004	0,0007	0,0009	0,0011	0,0014	0,0016	0,0019	0,0019	0,0023	0,0026	●
H.1.3	30	0,5	0,0001	0,0002	0,0003	0,0005	0,0007	0,0009	0,0011	0,0013	0,0015	0,0017	0,0019	0,0021	●
H.1.4															
H.2.1	114	0,5	0,0002	0,0004	0,0005	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
H.3.1	42	0,5	0,0001	0,0003	0,0004	0,0007	0,0009	0,0011	0,0014	0,0016	0,0019	0,0021	0,0023	0,0026	●

Cutting data standard values – BlueLine – End mill

Index	v_c (m/min) 52 140 ... 52 141 ...	v_c (m/min) 52 133 ... 52 134 ... 52 324 ...	$a_{p\,max.}$ x DC	52 133 ..., 52 134 ..., 52 140 ..., 52 141 ..., 52 324 ... Ø DC (mm) = 3	4	5	6	8	10	12	16	20	Compressed air
				a_e 0,05 x DC									
				f_z (mm)									
P.3.2	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
P.3.3	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.1.1	160	140	1,0	0,013	0,013	0,016	0,018	0,020	0,023	0,025	0,029	0,032	●
H.1.2	**140**	**130**	1,0	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●
H.1.3	**100**	**90**	1,0	0,010	0,010	0,012	0,014	0,016	0,018	0,020	0,023	0,025	●
H.1.4													
H.2.1	**190**	**160**	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.3.1	**140**	**130**	1,0	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●

Index	v_c (m/min)	$a_{p\,max.}$ x DC	52 135 ..., 52 136 ..., 52 325 ... Ø DC (mm) = 3	4	5	6	8	10	12	16	20	Compressed air
			a_e 0,05 x DC									
			f_z (mm)									
P.3.2	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
P.3.3	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.1.1	125	1,0	0,008	0,009	0,011	0,014	0,016	0,02	0,023	0,026	0,028	●
H.1.2	**115**	1,0	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●
H.1.3	**80**	1,0	0,005	0,006	0,007	0,01	0,012	0,015	0,017	0,019	0,02	●
H.1.4												
H.2.1	**140**	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.3.1	**115**	1,0	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●

Index	v_c (m/min)	$a_{p\,max.}$ x DC	52 344 ... Ø DC (mm) = 0,5			1,0–1,5			2,0–2,5			3,0–3,5			4,0			5,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
P.3.2	**120**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
P.3.3	**120**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
H.1.1	**80**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
H.1.2	**60**	0,5	0,004	0,004	0,003	0,006	0,005	0,004	0,009	0,007	0,005	0,013	0,010	0,007	0,017	0,013	0,010	0,022	0,016	0,011
H.1.3	**50**	0,5	0,004	0,003	0,002	0,005	0,004	0,003	0,007	0,006	0,004	0,011	0,008	0,006	0,014	0,011	0,008	0,018	0,013	0,009
H.1.4																				
H.2.1	**120**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
H.3.1	**60**	0,5	0,004	0,004	0,003	0,006	0,005	0,004	0,009	0,007	0,005	0,013	0,010	0,007	0,017	0,013	0,010	0,022	0,016	0,011

Index	52 140 ... 52 141 ...	52 133 ... 52 134 ... 52 324 ...		52 133 ..., 52 134 ..., 52 140 ..., 52 141 ..., 52 324 ...									Compressed air
				Ø DC (mm) =									
				3	4	5	6	8	10	12	16	20	
				a_e 0,6–1,0 x DC									
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
P.3.3	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.1.1	160	140	0,05	0,013	0,013	0,016	0,018	0,020	0,023	0,025	0,029	0,032	●
H.1.2	**140**	**130**	0,05	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●
H.1.3	**100**	**90**	0,05	0,010	0,010	0,012	0,014	0,016	0,018	0,020	0,023	0,025	●
H.1.4													
H.2.1	**190**	**160**	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.3.1	**140**	**130**	0,05	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●

Index		52 135 ..., 52 136 ..., 52 325 ...									Compressed air
		Ø DC (mm) =									
		3	4	5	6	8	10	12	16	20	
		a_e 0,6–1,0 x DC									
	v_c (m/min) $a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	140 0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
P.3.3	140 0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.1.1	125 0,05	0,008	0,009	0,011	0,014	0,016	0,02	0,023	0,026	0,028	●
H.1.2	**115** 0,05	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●
H.1.3	**80** 0,05	0,005	0,006	0,007	0,01	0,012	0,015	0,017	0,019	0,02	●
H.1.4											
H.2.1	**140** 0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.3.1	**115** 0,05	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●

Index	52 344 ...																		Compressed air
	Ø DC (mm) =																		
	6,0			8,0			10,0			12,0			16,0			20,0			
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	
	f_z (mm)																		
P.3.2	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,06	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
P.3.3	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,06	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
H.1.1	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,06	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
H.1.2	0,029	0,021	0,014	0,038	0,029	0,019	0,043	0,032	0,022	0,048	0,036	0,024	0,061	0,046	0,036	0,076	0,062	0,048	●
H.1.3	0,024	0,018	0,012	0,032	0,024	0,016	0,036	0,027	0,018	0,040	0,030	0,020	0,051	0,039	0,030	0,063	0,052	0,040	●
H.1.4																			
H.2.1	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
H.3.1	0,029	0,021	0,014	0,038	0,029	0,019	0,043	0,032	0,022	0,048	0,036	0,024	0,061	0,046	0,036	0,076	0,062	0,048	●

14

Cutting data standard values – BlueLine – End mill

Index	v_c (m/min)	$a_{p\,max.}$ x DC	52 348 ... Ø DC (mm) = 6		8		10		12		16		20		Compressed air
			a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	
			f_z (mm)												
P.3.2	120	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
P.3.3	120	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
H.1.1	100	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
H.1.2	90	2,0	0,021	0,017	0,024	0,019	0,027	0,022	0,030	0,025	0,035	0,030	0,041	0,036	●
H.1.3	60	2,0	0,014	0,011	0,016	0,013	0,018	0,015	0,021	0,018	0,025	0,022	0,030	0,027	●
H.1.4															
H.2.1	120	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
H.3.1	90	2,0	0,021	0,017	0,024	0,019	0,027	0,022	0,030	0,025	0,035	0,030	0,041	0,036	●

Index			52 353 ... Ø DC (mm) = 1	2	3	4	5	6	8	10	12	16	Compressed air
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.3.2	200	0,5	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
P.3.3	200	0,5	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.1.1	170	0,5	0,008	0,150	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.1.2	150	0,5	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●
H.1.3	110	0,5	0,005	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4													
H.2.1	200	0,5	0,008	0,150	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.3.1	150	0,5	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●

Index			52 354 ... Ø DC (mm) = 1	2	3	4	5	6	8	10	12	16	Compressed air
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.3.2	200	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
P.3.3	200	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.1	170	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.2	150	0,5	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●
H.1.3	110	0,5	0,003	0,005	0,010	0,015	0,020	0,025	0,03	0,035	0,040	0,045	●
H.1.4													
H.2.1	200	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.3.1	150	0,5	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●

Index			52 353 ...										Compressed air
			Ø DC (mm) =										
			1	2	3	4	5	6	8	10	12	16	
			a_e 0,6–1,0 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.3.2	200	0,05	0,008	0,015	0,030	0,045	0,06	0,075	0,090	0,105	0,120	0,135	●
P.3.3	200	0,05	0,008	0,015	0,030	0,045	0,06	0,075	0,090	0,105	0,120	0,135	●
H.1.1	170	0,05	0,008	0,015	0,030	0,045	0,06	0,075	0,090	0,105	0,120	0,135	●
H.1.2	150	0,05	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●
H.1.3	110	0,05	0,005	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4													
H.2.1	200	0,05	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.3.1	150	0,05	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●

Index			52 354 ...										Compressed air
			Ø DC (mm) =										
			1	2	3	4	5	6	8	10	12	16	
			a_e 0,6–1,0 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.3.2	200	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
P.3.3	200	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.1	170	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.2	150	0,05	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●
H.1.3	110	0,05	0,003	0,005	0,010	0,015	0,020	0,025	0,030	0,035	0,040	0,045	●
H.1.4													
H.2.1	200	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.3.1	150	0,05	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●

Cutting data standard values – BlueLine – Ball-nosed end mill

Index			52 258 ..., 52 259 ...									
			Ø DC (mm) =									
			0,1–0,5	0,6–1,0	1,5–2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
P.3.3	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
H.1.1	165	0,05	0,004	0,005	0,006	0,008	0,010	0,014	0,017	0,028	0,038	0,048
H.1.2	**145**	**0,05**	0,004	0,004	0,005	0,006	0,008	0,012	0,015	0,025	0,035	0,045
H.1.3	**105**	**0,05**	0,003	0,004	0,005	0,005	0,006	0,010	0,014	0,022	0,030	0,040
H.1.4												
H.2.1	**190**	**0,05**	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
H.3.1	**145**	**0,05**	0,004	0,004	0,005	0,006	0,008	0,012	0,015	0,025	0,035	0,045

Index			52 256 ..., 52 257 ..., 52 302 ..., 52 303 ..., 52 404 ..., 52 405 ...									
			Ø DC (mm) =									
			0,1–0,5	0,6–1,0	1,1–1,5	1,6–2,0	2,5	3,0	4,0	5,0	6,0	7,0
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	200	0,05	0,010	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040	0,040
P.3.3	200	0,05	0,010	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040	0,040
H.1.1	170	0,05	0,005	0,006	0,006	0,008	0,011	0,015	0,020	0,024	0,027	0,035
H.1.2	**150**	0,05	0,005	0,006	0,006	0,008	0,010	0,013	0,018	0,022	0,025	0,032
H.1.3	**110**	0,05	0,004	0,005	0,005	0,007	0,009	0,013	0,016	0,021	0,025	0,030
H.1.4												
H.2.1	**200**	0,05	0,010	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040	0,040
H.3.1	**150**	0,05	0,005	0,006	0,006	0,008	0,010	0,013	0,018	0,022	0,025	0,032

Index			52 355 ...											Compressed air
			Ø DC (mm) =											
			0,6–0,8	1,0	1,2–1,5	2,0	2,0	3,0	4,0	5,0	6,0	8,0	10,0	12,0	
			a_e 0,05 x DC												
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)												
P.3.2	**200**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,120	●
P.3.3	**200**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,120	●
H.1.1	**170**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,105	●
H.1.2	**150**	0,05	0,004	0,006	0,008	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,100	●
H.1.3	**110**	0,05	0,004	0,005	0,007	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4															
H.2.1	**200**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,120	●
H.3.1	**150**	0,05	0,004	0,006	0,008	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,100	●

Index	52 258 ..., 52 259 ...			Compressed air
	Ø DC (mm) =			
	12,0	16,0	20,0	
	a_e 0,05 x DC			
	f_z (mm)			
P.3.2	0,070	0,090	0,10	●
P.3.3	0,070	0,090	0,10	●
H.1.1	0,058	0,078	0,09	●
H.1.2	0,055	0,075	0,08	●
H.1.3	0,050	0,070	0,07	●
H.1.4				
H.2.1	0,070	0,090	0,10	●
H.3.1	0,055	0,075	0,08	●

Index	52 258 ..., 52 259 ...							Compressed air
	Ø DC (mm) =							
	8,0	9,0	10,0	12,0	14,0	16,0	20,0	
	a_e 0,05 x DC							
	f_z (mm)							
P.3.2	0,050	0,06	0,07	0,08	0,09	0,100	0,120	●
P.3.3	0,050	0,06	0,07	0,08	0,09	0,100	0,120	●
H.1.1	0,042	0,048	0,058	0,068	0,078	0,088	0,105	●
H.1.2	0,039	0,045	0,055	0,065	0,075	0,085	0,100	●
H.1.3	0,035	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4								
H.2.1	0,050	0,060	0,070	0,080	0,090	0,100	0,120	●
H.3.1	0,039	0,045	0,055	0,065	0,075	0,085	0,100	●

Cutting data standard values – BlueLine – Torus cutter

Index			52 304 ...									Compressed air
			Ø DC (mm) =									
			0,5–1,5	2,0–3,0	4,0	5,0	6,0	8,0	10,0	12,0	16,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120	●
P.3.3	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120	●
H.1.1	160	1,0	0,007	0,023	0,040	0,040	0,055	0,070	0,082	0,090	0,110	●
H.1.2	140	1,0	0,006	0,020	0,038	0,038	0,052	0,065	0,080	0,085	0,105	●
H.1.3	100	1,0	0,005	0,018	0,035	0,035	0,050	0,060	0,075	0,080	0,100	●
H.1.4												
H.2.1	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120	●
H.3.1	140	1,0	0,006	0,020	0,038	0,038	0,052	0,065	0,080	0,085	0,105	●

Index			52 305 ...						Compressed air
			Ø DC (mm) =						
			1,0–1,5	2,0	3,0	4,0	5,30	6,0	
			a_e 0,05 x DC						
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						
P.3.2	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060	●
P.3.3	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060	●
H.1.1	160	1,0	0,005	0,020	0,020	0,035	0,035	0,050	●
H.1.2	140	1,0	0,004	0,017	0,017	0,033	0,033	0,053	●
H.1.3	100	1,0	0,003	0,015	0,015	0,030	0,030	0,005	●
H.1.4									
H.2.1	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060	●
H.3.1	140	1,0	0,004	0,017	0,017	0,033	0,033	0,053	●

Index			52 361 ...									Compressed air
			Ø DC (mm) =									
			0,8–1,0	1,2–1,5	2,0	3,0	4,0	6,0	8,0	10,0	12,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	200	0,5	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
P.3.3	200	0,5	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.1	170	0,5	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.2	150	0,5	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●
H.1.3	110	0,5	0,005	0,007	0,010	0,020	0,030	0,050	0,060	0,070	0,080	●
H.1.4												
H.2.1	200	0,5	0,008	0,010	0,015	0,03	0,045	0,075	0,090	0,105	0,120	●
H.3.1	150	0,5	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●

Index			52 304 ...									Compressed air
			Ø DC (mm) =									
			0,5–1,5	2,0–3,0	4,0	5,0	6,0	8,0	10,0	12,0	16,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140	●
P.3.3	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140	●
H.1.1	160	0,05	0,011	0,028	0,050	0,050	0,070	0,080	0,090	0,100	0,130	●
H.1.2	140	0,05	0,010	0,025	0,044	0,044	0,070	0,075	0,088	0,085	0,125	●
H.1.3	100	0,05	0,009	0,021	0,040	0,040	0,065	0,070	0,085	0,080	0,120	●
H.1.4												
H.2.1	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140	●
H.3.1	140	0,05	0,010	0,025	0,044	0,044	0,070	0,075	0,088	0,085	0,125	●

Index			52 305 ...						Compressed air
			Ø DC (mm) =						
			1,0–1,5	2,0	3,0	4,0	5,30	6,0	
			a_e 0,05 x DC						
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						
P.3.2	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070	●
P.3.3	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070	●
H.1.1	160	0,05	0,009	0,025	0,025	0,045	0,045	0,060	●
H.1.2	140	0,05	0,008	0,022	0,022	0,040	0,040	0,058	●
H.1.3	100	0,05	0,007	0,018	0,018	0,035	0,035	0,050	●
H.1.4									
H.2.1	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070	●
H.3.1	140	0,05	0,008	0,022	0,022	0,040	0,040	0,058	●

Index			52 361 ...									Compressed air
			Ø DC (mm) =									
			0,8–1,0	1,2–1,5	2,0	3,0	4,0	6,0	8,0	10,0	12,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	200	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
P.3.3	200	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.1	170	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.2	150	0,05	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●
H.1.3	110	0,05	0,005	0,007	0,010	0,020	0,030	0,050	0,060	0,070	0,080	●
H.1.4												
H.2.1	200	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.3.1	150	0,05	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●

Cutting data standard values – Micro cutter – 2.2xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																	
	Ø DC (mm) = 0,2–0,4						Ø DC (mm) = 0,5–0,7						Ø DC (mm) = 0,8–0,9					
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,02	0,02	0,02	0,01	0,01	$a_{p\,max.}$	0,1	0,1	0,1	0,1	0,05	$a_{p\,max.}$	0,2	0,2	0,2	0,2	0,12
	$n_{min.}$	30.000					$n_{min.}$	12.000					$n_{min.}$	8.000				
	n	v_f (mm/min)					n	v_f (mm/min)					n	v_f (mm/min)				
P.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.3	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.4	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.1.5	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.2.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.2.3	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.2.4	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.3.1	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.3.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.3.3	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.4.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.4.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.3.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.2.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.3.1	50.000	141	123	106	88	71	50.000	175	152	131	109	88	32.000	285	248	213	176	142
K.3.2	50.000	141	123	106	88	71	50.000	175	152	131	109	88	32.000	285	248	213	176	142
N.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	44.000	485	422	364	301	242
N.3.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.3.3	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.4.1	50.000	212	185	159	132	106	50.000	250	218	188	155	125	50.000	531	462	398	329	266
S.1.1	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.1.2	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.2.1	50.000	72	62	54	44	36	50.000	89	77	66	55	44	25.000	91	79	68	56	45
S.2.2	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.2.3	50.000	54	47	41	34	27	30000	66	57	49	41	33	12.000	78	68	59	49	39
S.3.1	50.000	114	99	85	71	57	50.000	164	143	123	102	82	44.000	114	99	85	71	57
S.3.2	50.000	114	99	85	71	57	50.000	164	143	123	102	82	44.000	164	143	123	102	82
S.3.3	50.000	70	61	53	43	35	50.000	85	74	64	53	42	38.000	101	88	76	63	51
H.1.1	50.000	219	191	164	136	110	50.000	232	202	174	144	116	50.000	388	338	291	241	194
H.1.2	50.000	201	175	151	125	101	50.000	285	248	213	176	142	38.000	336	292	252	208	168
H.1.3	50.000	114	99	85	71	57	50.000	134	117	101	83	67	25.000	156	136	117	97	78
H.1.4	50.000	107	93	80	67	54	50.000	126	110	95	78	63	25.000	141	123	106	88	71
H.2.1	50.000	219	191	164	136	110	50.000	232	202	174	144	116	50.000	388	338	291	241	194
H.3.1	50.000	201	175	151	125	101	50.000	285	248	213	176	142	38.000	336	292	252	208	168
O.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
O.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
O.2.1	50.000	212	185	159	132	106	50.000	200	174	150	124	100	38.000	316	275	237	196	158
O.2.2	50.000	212	185	159	132	106	50.000	200	174	150	124	100	38.000	316	275	237	196	158
O.3.1																		

Index	52 802 ..., 52 804 ..., 52 806 ...												● 1st choice ○ suitable		
	Ø DC (mm) = 1,0–1,4						Ø DC (mm) = 1,5–1,7						Emulsion	Compressed air	MMS
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6 –1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\ max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\ max.}$	0,45	0,45	0,45	0,45	0,3			
	$n_{min.}$	6.500					$n_{min.}$	6.500							
	n	v_f (mm/min)					n	v_f (mm/min)							
P.1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●	○	○
P.1.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●	○	○
P.1.3	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●	○	○
P.1.4	50.000	671	584	503	416	335	33.000	1039	904	779	644	520	●	○	○
P.1.5	50.000	671	584	503	416	335	33.000	1039	904	779	644	520	●	○	○
P.2.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.2.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.2.3	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.2.4	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.3.1	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.3.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.3.3	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.4.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.4.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
M.1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●		○
M.2.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●		○
M.3.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●		○
K.1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.1.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.2.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.2.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.3.1	50.000	389	338	292	241	194	21.000	548	477	411	340	274		●	
K.3.2	25000	389	338	292	241	194	21.000	548	477	411	340	274		●	
N.1.1	50.000	930	809	697	576	465	50.000	1500	1305	1125	930	750	●		○
N.1.2	50.000	930	809	697	576	465	50.000	1500	1305	1125	930	750	●		○
N.2.1															
N.2.2															
N.2.3															
N.3.1	44.000	775	674	581	480	387	29.000	1160	1009	870	719	580	●		○
N.3.2	50.000	930	809	697	576	465	38.000	1400	1218	1050	868	700	●		○
N.3.3	50.000	930	809	697	576	465	38.000	1400	1218	1050	868	700	●		○
N.4.1	50.000	849	738	636	526	424	38.000	1388	1207	1041	860	694	●		○
S.1.1	15.000	99	86	74	61	49	12.000	170	148	127	105	85	●		○
S.1.2	15.000	99	86	74	61	49	12.000	170	148	127	105	85	●		○
S.2.1	25.000	152	132	114	94	76	16.000	294	256	220	182	147	●		○
S.2.2	15.000	99	86	74	61	49	12.000	170	148	127	105	85	●		○
S.2.3	12.000	131	114	99	82	66	8.000	255	221	191	158	127	●		○
S.3.1	44.000	170	148	127	105	85	29.000	329	286	246	204	164	●		○
S.3.2	44.000	247	215	186	153	124	29.000	365	318	274	226	183	●		○
S.3.3	38.000	170	148	127	105	85	25.000	329	286	246	204	164	●		○
H.1.1	50.000	620	539	465	384	310	33.000	850	740	638	527	425		●	
H.1.2	38.000	537	467	402	333	268	25.000	779	678	585	483	390		●	
H.1.3	25.000	235	204	176	146	117	16.000	346	301	260	215	173		●	
H.1.4	25.000	221	193	166	137	111	16.000	327	284	245	202	163		●	
H.2.1	50.000	620	539	465	384	310	33.000	850	740	638	527	425		●	
H.3.1	38.000	537	467	402	333	268	25.000	779	678	585	483	390		●	
O.1.1	50.000	930	809	697	576	465	38.000	1520	1322	1140	942	760	●	○	○
O.1.2	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	●	○	○
O.2.1	38.000	495	431	371	307	247	25.000	685	596	513	424	342	●	○	○
O.2.2	38.000	495	431	371	307	247	25.000	685	596	513	424	342	●	○	○
O.3.1															

Cutting data standard values – Micro cutter – 2.2xDC

Index	52 802 ..., 52 804 ..., 52 806 ...												● 1st choice ○ suitable		
	Ø DC (mm) = 1,8–1,9						Ø DC (mm) = 2,0						Emulsion	Compressed air	MMS
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,54	0,54	0,54	0,54	0,36	$a_{p\,max.}$	0,6	0,6	0,6	0,6	0,4			
	$n_{min.}$	5.500					$n_{min.}$	5.000							
	n	v_f (mm/min)					n	v_f (mm/min)							
P.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.5	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.4.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.4.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
M.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
M.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
M.3.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
K.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.2.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.3.1	18.000	630	548	473	391	315	12.000	750	650	550	450	350		●	
K.3.2	18.000	630	548	473	391	315	12.000	750	650	550	450	350		●	
N.1.1	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750	●		○
N.1.2	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750	●		○
N.2.1															
N.2.2															
N.2.3															
N.3.1	25.000	1250	1088	938	775	625	19.000	1140	990	855	700	570	●		○
N.3.2	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750	●		○
N.3.3	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750	●		○
N.4.1	33.000	1560	1357	1170	967	780	25.000	1500	1300	1125	930	750	●		○
S.1.1	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.1.2	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.2.1	14.000	420	365	315	260	210	12.500	500	400	350	300	250	●		○
S.2.2	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.2.3	7.000	370	322	278	229	185	6.000	300	260	230	200	160	●		○
S.3.1	25.000	400	348	300	248	200	25.000	1500	1300	1125	930	750	●		○
S.3.2	25.000	480	418	360	298	240	25.000	1500	1300	1125	930	750	●		○
S.3.3	22.000	380	331	285	236	190	25.000	1500	1300	1125	930	750	●		○
H.1.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
H.1.2	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
H.1.3	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
H.1.4	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
H.2.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
H.3.1	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
O.1.1	33.000	1560	1357	1170	967	780	19.000	1140	990	855	700	570	●	○	○
O.1.2	28.000	1400	1218	1050	868	700	19.000	1140	990	855	700	570	●	○	○
O.2.1	22.000	800	696	600	496	400	12.000	720	630	540	450	360	●	○	○
O.2.2	22.000	800	696	600	496	400	12.000	720	630	540	450	360	●	○	○
O.3.1															

Cutting data standard values – Micro cutter – 5xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																● 1st choice ○ suitable		
	Ø DC (mm) = 0,2–0,4 mm					Ø DC (mm) = 0,5–0,7 mm					Ø DC (mm) = 0,8–0,9 mm								
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	Emulsion	Compressed air	MMS
	$a_{p\,max.}$	0,012				$a_{p\,max.}$	0,06				$a_{p\,max.}$	0,12				0,064			
	$n_{min.}$	30.000				$n_{min.}$	12.000				$n_{min.}$	8.000							
	n	v_f (mm/min)				n	v_f (mm/min)				n	v_f (mm/min)							
P.1.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.3	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.4	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165	●	○	○
P.1.5	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165	●	○	○
P.2.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.2.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.2.3	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.2.4	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.3.1	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.3.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.3.3	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.4.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.4.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
M.1.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
M.2.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
M.3.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
K.1.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.1.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.2.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.2.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.3.1	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	
K.3.2	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	
N.1.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.1.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1	50.000	232	202	174	144	50.000	274	238	205	170	38.000	485	422	364	301	242	●		○
N.3.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.3.3	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.4.1	50.000	212	185	159	132	50.000	250	218	188	155	50.000	506	440	379	314	253	●		○
S.1.1	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.1.2	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.2.1	50.000	63	54	47	39	44.000	76	66	57	47	22.000	91	79	68	56	45	●		○
S.2.2	50.000	55	47	40	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.2.3	50.000	46	40	35	29	25.000	55	48	41	34	12.000	78	68	59	49	39	●		○
S.3.1	50.000	60	61	48	41	50.000	71	62	53	44	38.000	114	99	85	71	57	●		○
S.3.2	50.000	60	61	48	41	50.000	71	62	53	44	38.000	126	110	95	78	63	●		○
S.3.3	50.000	60	52	45	37	50.000	71	62	49	39	31.000	89	77	66	55	44	●		○
H.1.1	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●	
H.1.2	50.000	95	83	71	59	44.000	134	117	101	83	22.000	180	157	135	112	90		●	
H.1.3	50.000	89	78	67	55	44.000	126	110	95	78	22.000	170	148	127	105	85		●	
H.1.4																			
H.2.1	50.000	155	135	116	96	50.000	164	143	123	102	44.000	346	301	260	215	173		●	
H.3.1	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●	
O.1.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●	○	○
O.1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	554	482	416	344	277	●	○	○
O.2.1	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158	●	○	○
O.2.2	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158	●	○	○
O.3.1																			

a_e= 0.6–1.0 x DC: If values are missing, only trochoidal slot milling and profiling are permitted. Otherwise, there is the risk of tool breakage.

14

Cutting data standard values – Micro cutter – 5xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																	
	Ø DC (mm) = 1,0–1,4						Ø DC (mm) = 1,5–1,7						Ø DC (mm) = 1,8–1,9					
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,3				0,2	$a_{p\,max.}$	0,3				0,2	$a_{p\,max.}$	0,54				0,36
	$n_{min.}$	6.500					$n_{min.}$	6.500					$n_{min.}$	5.500				
	n	v_f (mm/min)					n	v_f (mm/min)					n	v_f (mm/min)				
P.1.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.3	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.4	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.1.5	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.2.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.2.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.2.3	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.2.4	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.3.1	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.3.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.3.3	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.4.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.4.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
M.1.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
M.2.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
M.3.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
K.1.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.1.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.2.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.2.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.3.1	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
K.3.2	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
N.1.1	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
N.1.2	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	38.000	697	607	523	432	349	25.000	1000	870	750	620	500	22.000	1100	957	825	682	550
N.3.2	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
N.3.3	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
N.4.1	50.000	849	738	636	526	424	33.000	1205	1048	904	747	602	28.000	1400	1218	1050	868	700
S.1.1	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.1.2	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.2.1	22.000	114	99	85	71	57	14.000	196	170	147	121	98	12.000	300	261	225	186	150
S.2.2	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.2.3	12.000	131	114	99	82	66	8.000	170	148	127	105	85	7.000	240	209	180	149	120
S.3.1	38.000	156	135	117	96	78	25.000	274	238	205	170	137	22.000	380	331	285	236	190
S.3.2	38.000	212	185	159	132	106	25.000	365	318	274	226	183	22.000	450	392	338	279	225
S.3.3	31.000	127	111	95	79	64	21.000	201	175	151	125	100	18.000	300	261	225	186	150
H.1.1	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
H.1.2	22.000	235	204	176	146	117	14.000	346	301	260	215	173	12.000	450	392	338	279	225
H.1.3	22.000	221	193	166	137	111	14.000	327	284	245	202	163	12.000	450	392	338	279	225
H.1.4																		
H.2.1	44.000	426	371	320	264	213	29.000	600	522	450	372	300	25.000	800	696	600	496	400
H.3.1	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
O.1.1	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
O.1.2	44.000	813	708	610	504	407	29.000	1160	1009	870	719	580	25.000	1200	1044	900	744	600
O.2.1	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
O.2.2	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
O.3.1																		

Index	52 802 ..., 52 804 ..., 52 806 ...						● 1st choice ○ suitable		
	Ø DC (mm) = 2,0								
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	Emulsion	Compressed air	MMS
	$a_{p\,max.}$	0,6				0,4			
	$n_{min.}$	5.000							
	n	v_f (mm/min)							
P.1.1	22.000	1320	1148	990	818	660	●	○	○
P.1.2	22.000	1320	1148	990	818	660	●	○	○
P.1.3	22.000	1320	1148	990	818	660	●	○	○
P.1.4	15.000	900	783	675	558	450	●	○	○
P.1.5	15.000	900	783	675	558	450	●	○	○
P.2.1	22.000	1320	1148	990	818	660		●	○
P.2.2	22.000	1320	1148	990	818	660		●	○
P.2.3	15.000	900	783	675	558	450		●	○
P.2.4	15.000	900	783	675	558	450		●	○
P.3.1	15.000	900	783	675	558	450		●	○
P.3.2	22.000	1320	1148	990	818	660		●	○
P.3.3	15.000	900	783	675	558	450		●	○
P.4.1	22.000	1320	1148	990	818	660		●	○
P.4.2	22.000	1320	1148	990	818	660		●	○
M.1.1	15.000	900	783	675	558	450	●		○
M.2.1	15.000	900	783	675	558	450	●		○
M.3.1	15.000	900	783	675	558	450	●		○
K.1.1	25.000	1500	1305	1125	930	750	○	●	
K.1.2	25.000	1500	1305	1125	930	750	○	●	
K.2.1	25.000	1500	1305	1125	930	750	○	●	
K.2.2	25.000	1500	1305	1125	930	750	○	●	
K.3.1	12.000	520	452	390	322	260		●	
K.3.2	12.000	520	452	390	322	260		●	
N.1.1	31.000	1860	1618	1395	1153	930	●		○
N.1.2	31.000	1860	1618	1395	1153	930	●		○
N.2.1									
N.2.2									
N.2.3									
N.3.1	19.000	1140	992	855	707	570	●		○
N.3.2	25.000	1500	1305	1125	930	750	●		○
N.3.3	25.000	1500	1305	1125	930	750	●		○
N.4.1	25.000	1500	1305	1125	930	750	●		○
S.1.1	7.000	300	261	225	186	150	●		○
S.1.2	7.000	300	261	225	186	150	●		○
S.2.1	11.000	400	348	300	248	200	●		○
S.2.2	7.000	300	261	225	186	150	●		○
S.2.3	6.000	260	226	195	161	130	●		○
S.3.1	19.000	420	365	315	260	210	●		○
S.3.2	19.000	500	435	375	310	250	●		○
S.3.3	15.000	400	348	300	248	200	●		○
H.1.1	15.000	500	435	375	310	250		●	
H.1.2	11.000	480	418	360	298	240		●	
H.1.3	11.000	480	418	360	298	240		●	
H.1.4									
H.2.1	22.000	1000	870	750	620	500		●	
H.3.1	15.000	500	435	375	310	250		●	
O.1.1	25.000	1500	1305	1125	930	750	●	○	○
O.1.2	22.000	1320	1148	990	818	660	●	○	○
O.2.1	15.000	660	574	495	409	330	●	○	○
O.2.2	15.000	660	574	495	409	330	●	○	○
O.3.1									

Cutting data standard values – Micro cutter – 10xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																	
		Ø DC (mm) = 0,2–0,4				Ø DC (mm) = 0,5–0,7					Ø DC (mm) = 0,8–0,9				Ø DC (mm) = 1,0–1,4			
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC
	$a_{p\ max.}$	0,006	0,006	0,006	0,006	0,015	0,015	0,015	0,015	$a_{p\ max.}$	0,024	0,024	0,024	0,024	0,03	0,03	0,03	0,03
	$n_{min.}$	30.000				12.000				$n_{min.}$	8.000				6.500			
	n	v_f (mm/min)								n	v_f (mm/min)							
P.1.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.3	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.4	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.1.5	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.2.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.2.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.2.3	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.2.4	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.3.1	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.3.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.3.3	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.4.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.4.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
M.1.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
M.2.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
M.3.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
K.1.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.1.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.2.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.2.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.3.1	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
K.3.2	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
N.1.1	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
N.1.2	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	50.000	232	202	174	144	274	238	205	170	31.000	402	350	301	249	480	418	360	298
N.3.2	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
N.3.3	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
N.4.1	50.000	212	185	159	132	300	261	225	186	44.000	506	440	379	314	742	646	557	460
S.1.1	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.1.2	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.2.1	50.000	54	47	40	33	63	55	47	39	19.000	102	89	76	63	126	110	95	78
S.2.2	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.2.3	50.000	46	40	35	29	55	48	41	34	12.000	59	51	44	36	82	71	62	51
S.3.1	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	141	123	106	88
S.3.2	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	177	154	133	110
S.3.3	50.000	60	52	45	37	71	62	53	44	25.000	89	77	66	55	141	123	106	88
H.1.1	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
H.1.2	50.000	47	41	36	29	67	58	50	42	19.000	90	78	68	56	101	88	75	62
H.1.3	50.000	45	39	34	28	63	55	47	39	19.000	85	74	64	53	95	83	71	59
H.1.4																		
H.2.1	50.000	77	67	58	48	82	71	62	51	38.000	173	151	130	107	194	168	145	120
H.3.1	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
O.1.1	50.000	232	202	174	144	329	286	246	204	44.000	554	482	416	344	813	708	610	504
O.1.2	50.000	232	202	174	144	329	286	246	204	38.000	554	482	416	344	705	613	529	437
O.2.1	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
O.2.2	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
O.3.1																		

a_e= 0,6–1,0 x DC: Missing values only trochodial slotting and milling is recommended. Otherwise there is the risk of tool breakage.

Index	52 802 ..., 52 804 ..., 52 806 ...															● 1st choice ○ suitable		
	Ø DC (mm) = 1,5–1,7					Ø DC (mm) = 1,8–1,9					Ø DC (mm) = 2,0							
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC			
	$a_{p\,max.}$	0,06	0,06	0,06	0,06	$a_{p\,max.}$	0,072	0,072	0,072	0,072	$a_{p\,max.}$	0,08	0,08	0,08	0,08			
	$n_{min.}$	6.500				$n_{min.}$	5.500				$n_{min.}$	5.000						
	n	v_f (mm/min)				n	v_f (mm/min)				n	v_f (mm/min)				Emulsion	Compressed air	MMS
P.1.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.3	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.4	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446	●	○	○
P.1.5	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446	●	○	○
P.2.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.2.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.2.3	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.2.4	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.3.1	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.3.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.3.3	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.4.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.4.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
M.1.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
M.2.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
M.3.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
K.1.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.1.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.2.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.2.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.3.1	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	
K.3.2	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	
N.1.1	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042	●		○
N.1.2	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042	●		○
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	21.000	800	696	600	496	18.000	850	740	638	527	15.000	900	783	675	558	●		○
N.3.2	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707	●		○
N.3.3	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707	●		○
N.4.1	29.000	1059	921	794	657	25.000	1200	1044	900	744	22.000	1320	1148	990	818	●		○
S.1.1	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.1.2	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.2.1	12.000	204	178	153	127	10.000	300	261	225	186	9.000	350	305	263	217	●		○
S.2.2	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.2.3	8.000	106	92	80	66	7.000	200	174	150	124	6.000	220	191	165	136	●		○
S.3.1	21.000	228	199	171	141	18.000	300	261	225	186	15.000	380	331	285	236	●		○
S.3.2	21.000	274	238	205	170	18.000	400	348	300	248	15.000	450	392	338	279	●		○
S.3.3	16.000	237	206	178	147	14.000	300	261	225	186	12.000	380	331	285	236	●		○
H.1.1	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
H.1.2	12.000	173	151	130	107	10.000	200	174	150	124	9.000	240	209	180	149		●	
H.1.3	12.000	163	142	122	101	10.000	200	174	150	124	9.000	240	209	180	149		●	
H.1.4																		
H.2.1	25.000	300	261	225	186	21.000	400	348	300	248	19.000	500	435	375	310		●	
H.3.1	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
O.1.1	29.000	1160	1009	870	719	25.000	1200	1044	900	744	22.000	1320	1148	990	818	●	○	○
O.1.2	25.000	1000	870	750	620	18.000	1000	870	750	620	19.000	1140	992	855	707	●	○	○
O.2.1	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322	●	○	○
O.2.2	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322	●	○	○
O.3.1																		

Cutting data standard values – MultiLock – Radius milling cutter

Index	53 803 ..., 53 804 ...						● 1st choice ○ suitable		
	CTC5240	CTPX225	Ø DC (mm) = 12	16	20	25	Emulsion	Compressed air	MMS
	v_c (m/min)		a_e / a_p= 0,05 x DC f_z (mm)						
P.1.1		180	0,12	0,15	0,18	0,20	●	○	○
P.1.2		160	0,13	0,16	0,19	0,21	●	○	○
P.1.3		160	0,13	0,16	0,19	0,21	●	○	○
P.1.4		140	0,10	0,13	0,16	0,18	●	○	○
P.1.5		140	0,10	0,13	0,16	0,18	●	○	○
P.2.1		150	0,10	0,13	0,16	0,18	●	○	○
P.2.2		150	0,10	0,13	0,16	0,18	●	○	○
P.2.3		90	0,09	0,10	0,13	0,14	●	○	○
P.2.4		90	0,09	0,10	0,13	0,14	●	○	○
P.3.1		80	0,07	0,09	0,11	0,12	●	○	○
P.3.2		80	0,07	0,09	0,11	0,12	●	○	○
P.3.3		80	0,07	0,09	0,11	0,12	●	○	○
P.4.1		60	0,09	0,10	0,13	0,14	●		○
P.4.2		50	0,09	0,10	0,13	0,14	●		○
M.1.1		50	0,07	0,09	0,11	0,12	●		○
M.2.1		40	0,06	0,08	0,10	0,11	●		○
M.3.1		50	0,07	0,09	0,11	0,12	●		○
K.1.1		150	0,13	0,17	0,21	0,23	●	○	○
K.1.2		120	0,12	0,15	0,18	0,20	●	○	○
K.2.1		140	0,13	0,16	0,19	0,21	●	○	○
K.2.2		120	0,10	0,13	0,16	0,18	●	○	○
K.3.1		120	0,13	0,16	0,19	0,21	●	○	○
K.3.2		100	0,12	0,15	0,18	0,20	●	○	○
N.1.1		500	0,20	0,25	0,30	0,33	●		○
N.1.2		450	0,20	0,25	0,30	0,33	●		○
N.2.1									
N.2.2		380	0,19	0,24	0,28	0,31	●		○
N.2.3		150	0,16	0,20	0,24	0,26	●		○
N.3.1		220	0,13	0,17	0,21	0,23	●		○
N.3.2		190	0,13	0,17	0,21	0,23	●		○
N.3.3		250	0,13	0,16	0,19	0,21	●		○
N.4.1									
S.1.1	60		0,08	0,11	0,16	0,17	●		
S.1.2									
S.2.1	60		0,08	0,11	0,16	0,17	●		
S.2.2	60		0,08	0,11	0,16	0,17	●		
S.2.3									
S.3.1	140		0,11	0,16	0,21	0,22	●		
S.3.2	100		0,08	0,11	0,16	0,17	●		
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – MultiLock – Torus cutter

Index	CTC5240	CTPX225	53 805 ..., 53 806 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
			12		16		20		25				
			a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC	a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC	a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC	a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC			
			$a_{p\,max.}$ (mm) =										
			3,0		4,5		6,0		8,0				
	v_c (m/min)		f_z (mm)								Emulsion	Compressed air	MMS
P.1.1		180	0,08	0,05	0,11	0,07	0,14	0,08	0,15	0,08	●	○	○
P.1.2		160	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
P.1.3		160	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
P.1.4		140	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.1.5		140	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.2.1		150	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.2.2		150	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.2.3		90	0,06	0,03	0,08	0,05	0,10	0,06	0,11	0,06	●	○	○
P.2.4		90	0,06	0,03	0,08	0,05	0,10	0,06	0,11	0,06	●	○	○
P.3.1		80	0,05	0,03	0,07	0,04	0,09	0,06	0,10	0,06	●	○	○
P.3.2		80	0,05	0,03	0,07	0,04	0,09	0,06	0,10	0,06	●	○	○
P.3.3		80	0,05	0,03	0,07	0,04	0,09	0,06	0,10	0,06	●	○	○
P.4.1		60	0,06	0,05	0,08	0,07	0,10	0,09	0,11	0,09	●		○
P.4.2		50	0,06	0,05	0,08	0,07	0,10	0,09	0,11	0,09	●		○
M.1.1		50	0,05	0,04	0,07	0,06	0,09	0,08	0,10	0,08	●		○
M.2.1		40	0,04	0,03	0,06	0,05	0,08	0,07	0,09	0,07	●		○
M.3.1		50	0,05	0,04	0,07	0,06	0,09	0,08	0,10	0,08	●		○
K.1.1		150	0,09	0,06	0,13	0,08	0,16	0,10	0,18	0,10	●	○	○
K.1.2		120	0,08	0,05	0,11	0,07	0,14	0,08	0,15	0,08	●	○	○
K.2.1		140	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
K.2.2		120	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
K.3.1		120	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
K.3.2		100	0,08	0,05	0,11	0,07	0,14	0,08	0,15	0,08	●	○	○
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1													
N.3.2		220	0,09	0,06	0,13	0,08	0,16	0,10	0,18	0,10	●		○
N.3.3													
N.4.1													
S.1.1	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.1.2	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.2.1	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.2.2	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.2.3	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.3.1	140		0,10	0,05	0,15	0,08	0,2	0,11	0,22	0,13	●		
S.3.2	100		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Plunging angle for ramping milling = 1.9°
Plunging angle for helical milling = 1.5°
Bore diameter with helical milling = D_{min} 1.7xDC / D_{max} 1.95xDC
With ramping and helical milling, multiply the f_z by 0.5

14

Cutting data standard values – MultiLock – HFC milling cutter

Index	CTC5240	CTPX225	53 801 ..., 53 802 ...												● 1st choice ○ suitable		
			Ø DC (mm) =														
			12			16			20			25					
			a_e x DC =														
			0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0			
			$a_{p\,max.}$ (mm) =														
			0,5			0,8			0,8			0,8					
	v_c (m/min)		f_z (mm)												Emulsion	Compressed air	MMS
P.1.1		200	0,45	0,36	0,26	0,63	0,47	0,30	0,81	0,60	0,38	0,89	0,63	0,38	●	○	○
P.1.2		180	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
P.1.3		180	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
P.1.4		150	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.1.5		150	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.2.1		170	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.2.2		170	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.2.3		100	0,33	0,26	0,20	0,46	0,34	0,22	0,59	0,44	0,28	0,65	0,47	0,28	●	○	○
P.2.4		100	0,33	0,26	0,20	0,46	0,34	0,22	0,59	0,44	0,28	0,65	0,47	0,28	●	○	○
P.3.1		90	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,25	0,57	0,41	0,25	●	○	○
P.3.2		90	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,25	0,57	0,41	0,25	●	○	○
P.3.3		90	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,25	0,57	0,41	0,25	●	○	○
P.4.1		70	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●		○
P.4.2		60	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●		○
M.1.1		55	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,24	0,57	0,40	0,24	●		○
M.2.1		40	0,25	0,20	0,15	0,35	0,26	0,17	0,44	0,33	0,21	0,49	0,35	0,21	●		○
M.3.1		60	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,24	0,57	0,40	0,24	●		○
K.1.1		170	0,53	0,42	0,32	0,74	0,55	0,35	0,96	0,71	0,45	1,06	0,75	0,45	●	○	○
K.1.2		130	0,45	0,36	0,26	0,63	0,47	0,3	0,81	0,59	0,38	0,89	0,63	0,38	●	○	○
K.2.1		150	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
K.2.2		130	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
K.3.1		130	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
K.3.2		110	0,45	0,36	0,26	0,63	0,47	0,30	0,81	0,59	0,38	0,89	0,63	0,38	●	○	○
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.1.2	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.2.1	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.2.2	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.2.3	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.3.1	140		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.3.2	100		0,25	0,19	0,14	0,26	0,19	0,12	0,28	0,22	0,17	0,29	0,24	0,18	●		
S.3.3	140		0,18	0,15	0,11	0,20	0,15	0,11	0,22	0,18	0,14	0,23	0,20	0,16	●		
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

Plunging angle for ramping and helical milling = 1.9°
Bore diameter with helical milling = D_{min} 1.6xDC / D_{max} 1.95xDC
With ramping and helical milling, multiply the f_z by 0.5

Cutting data standard values – MultiLock – Deburring cutter

Index	CTPX225	53800 ...		● 1st choice ○ suitable		
		Ø DC (mm) =				
		12	16			
		a_e x DC =				
		0,1–0,2	0,1–0,3			
		$a_{p\,max.}$ (mm) =				
		4	6			
	v_c (m/min)	f_z (mm)		Emulsion	Compressed air	MMS
P.1.1	200	0,09	0,12	●	○	○
P.1.2	180	0,10	0,13	●	○	○
P.1.3	180	0,10	0,13	●	○	○
P.1.4	150	0,08	0,11	●	○	○
P.1.5	150	0,08	0,11	●	○	○
P.2.1	170	0,08	0,11	●	○	○
P.2.2	170	0,08	0,11	●	○	○
P.2.3	100	0,07	0,09	●	○	○
P.2.4	100	0,07	0,09	●	○	○
P.3.1	90	0,06	0,08	●	○	○
P.3.2	90	0,06	0,08	●	○	○
P.3.3	90	0,06	0,08	●	○	○
P.4.1	70	0,07	0,09	●		○
P.4.2	60	0,07	0,09	●		○
M.1.1	60	0,06	0,08	●		○
M.2.1	40	0,05	0,07	●		○
M.3.1	60	0,06	0,08	●		○
K.1.1	170	0,11	0,14	●	○	○
K.1.2	130	0,09	0,12	●	○	○
K.2.1	150	0,10	0,13	●	○	○
K.2.2	130	0,08	0,11	●	○	○
K.3.1	130	0,10	0,13	●	○	○
K.3.2	110	0,09	0,12	●	○	○
N.1.1	550	0,16	0,21	●		
N.1.2	500	0,16	0,21	●		
N.2.1						
N.2.2	420	0,15	0,20	●		
N.2.3	170	0,13	0,17	●		
N.3.1	240	0,11	0,14	●		
N.3.2	210	0,11	0,14	●		
N.3.3	280	0,10	0,13	●		
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – MultiChange – PCR-UNI

Index	52 871 ...													
	Correction factor f_z and v_c Tool holder				Feedrates for extra short and short holder									
					Ø DC (mm) =					Ø DC (mm) =				
					10,0	12,0	16,0	20,0		10,0	12,0	16,0	20,0	
					a_e 0,25xDC					a_e 1xDC				
Index	Medium-length version	Type long	Type extra long	$a_{p\,max.}$	v_c (m/min)	f_z (mm)				v_c (m/min)	f_z (mm)			
P.1.1	**0,9**	**0,7***	**0,6***	0,56	**490**	0,057	0,065	0,080	0,091	**240**	0,028	0,033	0,040	0,046
P.1.2	**0,9**	**0,7***	**0,6***	0,56	**470**	0,054	0,062	0,076	0,087	**230**	0,027	0,031	0,038	0,044
P.1.3	**0,9**	**0,7***	**0,6***	0,56	**445**	0,052	0,059	0,073	0,083	**220**	0,026	0,030	0,036	0,041
P.1.4	**0,9**	**0,7***	**0,6***	0,56	**425**	0,049	0,056	0,069	0,079	**205**	0,025	0,028	0,034	0,039
P.1.5	**0,9**	**0,7***	**0,6***	0,56	**400**	0,047	0,053	0,065	0,075	**195**	0,023	0,027	0,033	0,037
P.2.1	**0,9**	**0,7***	**0,6***	0,56	**445**	0,057	0,065	0,080	0,091	**220**	0,028	0,033	0,040	0,046
P.2.2	**0,9**	**0,7***	**0,6***	0,56	**405**	0,052	0,059	0,073	0,083	**200**	0,026	0,030	0,036	0,041
P.2.3	**0,9**	**0,7***	**0,6***	0,56	**365**	0,047	0,053	0,065	0,075	**180**	0,023	0,027	0,033	0,037
P.2.4	**0,9**	**0,7***	**0,6***	0,56	**285**	0,043	0,050	0,060	0,069	**140**	0,022	0,025	0,030	0,035
P.3.1	**0,9**	**0,7***	**0,6***	0,56	**265**	0,050	0,057	0,070	0,080	**130**	0,025	0,029	0,035	0,040
P.3.2	**0,9**	**0,7***	**0,6***	0,56	**245**	0,047	0,054	0,067	0,076	**120**	0,024	0,027	0,033	0,038
P.3.3	**0,9**	**0,7***	**0,6***	0,56	**225**	0,045	0,051	0,063	0,072	**110**	0,022	0,026	0,031	0,036
P.4.1	**0,9**	**0,7***	**0,6***	0,56	**180**	0,034	0,040	0,048	0,055	**90**	0,017	0,020	0,024	0,028
P.4.2	**0,9**	**0,7***	**0,6***	0,56	**180**	0,034	0,040	0,048	0,055	**90**	0,017	0,020	0,024	0,028
M.1.1	0,9	0,7*	0,6*	0,56	120	0,030	0,035	0,042	0,048	60	0,015	0,017	0,021	0,024
M.2.1	0,9	0,7*	0,6*	0,56	115	0,025	0,029	0,035	0,040	55	0,012	0,014	0,018	0,020
M.3.1	0,9	0,7*	0,6*	0,56	120	0,026	0,030	0,036	0,041	60	0,013	0,015	0,018	0,021
K.1.1	**0,9**	**0,7***	**0,6***	0,56	**485**	0,086	0,099	0,121	0,138	**240**	0,043	0,050	0,060	0,069
K.1.2	**0,9**	**0,7***	**0,6***	0,56	**365**	0,060	0,069	0,085	0,097	**180**	0,030	0,035	0,042	0,048
K.2.1	**0,9**	**0,7***	**0,6***	0,56	**445**	0,073	0,084	0,103	0,118	**220**	0,037	0,042	0,051	0,059
K.2.2	**0,9**	**0,7***	**0,6***	0,56	**365**	0,060	0,069	0,085	0,097	**180**	0,030	0,035	0,042	0,048
K.3.1	**0,9**	**0,7***	**0,6***	0,56	**325**	0,060	0,069	0,085	0,097	**160**	0,030	0,035	0,042	0,048
K.3.2	**0,9**	**0,7***	**0,6***	0,56	**305**	0,052	0,059	0,073	0,083	**150**	0,026	0,030	0,036	0,041

* = Trimming and trochoidal slot milling

Cutting data standard values – MultiChange – PCR-ALU

Index	52 872 ...													
	Correction factor f_z and v_c Tool holder				Feedrates for extra short and short holder									
					Ø DC (mm) =					Ø DC (mm) =				
					10,0	12,0	16,0	20,0		10,0	12,0	16,0	20,0	
					a_e 0,25xDC					a_e 1xDC				
Index	Medium-length version	Type long	Type extra long	$a_{p\,max.}$	v_c (m/min)	f_z (mm)				v_c (m/min)	f_z (mm)			
N.1.1	**0,9**	**0,7***	**0,6***	0,56	**1035**	0,169	0,194	0,237	0,271	**675**	0,084	0,097	0,119	0,136
N.1.2	**0,9**	**0,7***	**0,6***	0,56	**945**	0,154	0,177	0,216	0,247	**610**	0,077	0,088	0,108	0,123
N.2.1	**0,9**	**0,7***	**0,6***	0,56	**625**	0,161	0,185	0,226	0,259	**405**	0,081	0,093	0,113	0,129
N.2.2	**0,9**	**0,7***	**0,6***	0,56	**500**	0,169	0,194	0,237	0,271	**325**	0,084	0,097	0,119	0,136
N.2.3	**0,9**	**0,7***	**0,6***	0,56	**360**	0,184	0,212	0,259	0,296	**235**	0,092	0,106	0,129	0,148
N.3.1	**0,9**	**0,7***	**0,6***	0,56	**450**	0,077	0,088	0,108	0,123	**295**	0,038	0,044	0,054	0,062
N.3.2	**0,9**	**0,7***	**0,6***	0,56	**270**	0,123	0,141	0,173	0,197	**175**	0,061	0,071	0,086	0,099
N.3.3	**0,9**	**0,7***	**0,6***	0,56	**360**	0,123	0,141	0,173	0,197	**235**	0,061	0,071	0,086	0,099
N.4.1														

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Index	52 871 ... Ramping Max. angle	Drilling f_z factor	Helical milling $\alpha_{R\,max.}$**	Max. plunging angle $D_{min.}$ 1,5 x DC	$D_{max.}$ 1,8 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.2	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.3	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.4	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.5	45°	0,9	0,56xDC	20°	13°	○	●	○
P.2.1	45°	0,8	0,56xDC	20°	13°	○	●	○
P.2.2	45°	0,8	0,56xDC	20°	13°	○	●	○
P.2.3	45°	0,8	0,56xDC	20°	13°	○	●	○
P.2.4	45°	0,7	0,56xDC	20°	13°	○	●	○
P.3.1	30°	0,8	0,56xDC	20°	13°	●		○
P.3.2	30°	0,7	0,56xDC	20°	13°	●		○
P.3.3	30°	0,7	0,56xDC	20°	13°	●		○
P.4.1	15°		0,56xDC	20°	13°	●		○
P.4.2	15°		0,56xDC	20°	13°	●		○
M.1.1	15°		0,4xDC	14°	9°	●		
M.2.1	15°		0,4xDC	14°	9°	●		
M.3.1	15°		0,4xDC	14°	9°	●		
K.1.1	45°	0,8	0,56xDC	20	13		●	
K.1.2	45°	0,8	0,56xDC	20	13		●	
K.2.1	45°	0,8	0,56xDC	20	13		●	
K.2.2	45°	0,8	0,56xDC	20	13		●	
K.3.1	45°	0,8	0,56xDC	20	13		●	
K.3.2	45°	0,8	0,56xDC	20	13		●	

Index	52 872 ... Ramping Max. angle	Drilling f_z factor	Helical milling $\alpha_{R\,max.}$**	Max. plunging angle $D_{min.}$ 1,5 x DC	$D_{max.}$ 1,8 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
N.1.1	45°	0,9	0,56xDC	20°	13°	●		○
N.1.2	45°	0,9	0,56xDC	20°	13°	●		○
N.2.1	45°	0,9	0,56xDC	20°	13°	●		○
N.2.2	45°	0,9	0,56xDC	20°	13°	●		○
N.2.3	45°	0,9	0,56xDC	20°	13°	●		○
N.3.1	45°	0,9	0,56xDC	20°	13°	●		○
N.3.2	45°	0,9	0,56xDC	20°	13°	●		○
N.3.3	45°	0,9	0,56xDC	20°	13°	●		○
N.4.1								

** Width of cut per helical revolution

Cutting data standard values – MultiChange – Shoulder milling heads

Index	52 860 ..., 52 861 ...																		● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder														Emulsion	Compressed air	MMS
					Ø DC (mm) =																
					8			10			12			16			20				
					$a_{p\,max.}$ =																
					5,2	4,4	3,6	6,5	5,5	4,5	7,8	6,6	5,4	10,4	8,8	7,2	13	11	9		
					a_e x DC =																
					0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0		
					f_z (mm)																
P.1.1	0,9	0,7*	0,6*	175	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	0,09	0,07	0,05	○	●	○
P.1.2	0,9	0,7*	0,6*	165	0,05	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,08	0,06	0,04	0,09	0,07	0,04	○	●	○
P.1.3	0,9	0,7*	0,6*	160	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04	○	●	○
P.1.4	0,9	0,7*	0,6*	150	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	○	●	○
P.1.5	0,9	0,7*	0,6*	145	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	○	●	○
P.2.1	0,9	0,7*	0,6*	160	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	0,09	0,07	0,05	○	●	○
P.2.2	0,9	0,7*	0,6*	145	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04	○	●	○
P.2.3	0,9	0,7*	0,6*	130	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	○	●	○
P.2.4	0,9	0,7*	0,6*	100	0,04	0,03	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	○	●	○
P.3.1	0,9	0,7*	0,6*	95	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04	●		○
P.3.2	0,9	0,7*	0,6*	85	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	●		○
P.3.3	0,9	0,7*	0,6*	80	0,04	0,03	0,02	0,05	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	●		○
P.4.1	0,9	0,7*	0,6*	65	0,03	0,02	0,01	0,03	0,03	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	●		○
P.4.2	0,9	0,7*	0,6*	65	0,03	0,02	0,01	0,03	0,03	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	●		○
M.1.1																						
M.2.1																						
M.3.1																						
K.1.1	0,9	0,7*	0,6*	175	0,07	0,05	0,04	0,09	0,07	0,04	0,10	0,07	0,05	0,12	0,09	0,06	0,14	0,10	0,07		●	
K.1.2	0,9	0,7*	0,6*	130	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	0,09	0,06	0,04	0,10	0,07	0,05		●	
K.2.1	0,9	0,7*	0,6*	160	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,06	0,04	0,10	0,08	0,05	0,12	0,09	0,06		●	
K.2.2	0,9	0,7*	0,6*	130	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	0,09	0,06	0,04	0,10	0,07	0,05		●	
K.3.1	0,9	0,7*	0,6*	115	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	0,09	0,06	0,04	0,10	0,07	0,05		●	
K.3.2	0,9	0,7*	0,6*	110	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04		●	
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1																						
N.3.2																						
N.3.3																						
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Rough-finishing milling heads

Index	52 862 ...														● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder										Emulsion	Compressed air	MMS
					Ø DC (mm) =												
					8		10		12		16		20				
					$a_{p\,max.}$ =												
					7,5		9,4		11,3		15,0		18,8				
					a_e x DC =												
					0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4			
					f_z (mm)												
P.1.1	0,9	0,7*	0,6*	225	0,04	0,03	0,05	0,04	0,06	0,04	0,08	0,05	0,09	0,06	○	●	○
P.1.2	0,9	0,7*	0,6*	215	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	0,08	0,06	○	●	○
P.1.3	0,9	0,7*	0,6*	205	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	○	●	○
P.1.4	0,9	0,7*	0,6*	195	0,04	0,03	0,05	0,03	0,05	0,04	0,06	0,05	0,07	0,05	○	●	○
P.1.5	0,9	0,7*	0,6*	185	0,04	0,03	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	○	●	○
P.2.1	0,9	0,7*	0,6*	205	0,04	0,03	0,05	0,04	0,06	0,04	0,08	0,05	0,09	0,06	○	●	○
P.2.2	0,9	0,7*	0,6*	185	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	○	●	○
P.2.3	0,9	0,7*	0,6*	170	0,04	0,03	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	○	●	○
P.2.4	0,9	0,7*	0,6*	130	0,03	0,02	0,04	0,03	0,05	0,03	0,06	0,04	0,06	0,05	○	●	○
P.3.1	0,9	0,7*	0,6*	120	0,04	0,03	0,05	0,03	0,05	0,04	0,07	0,05	0,08	0,05	●		○
P.3.2	0,9	0,7*	0,6*	110	0,04	0,03	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	●		○
P.3.3	0,9	0,7*	0,6*	105	0,04	0,02	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	●		○
P.4.1	0,9	0,7*	0,6*	85	0,03	0,02	0,03	0,02	0,04	0,03	0,05	0,03	0,05	0,04	●		○
P.4.2	0,9	0,7*	0,6*	85	0,03	0,02	0,03	0,02	0,04	0,03	0,05	0,03	0,05	0,04	●		○
M.1.1	0,9	0,7*	0,6*	55	0,02	0,02	0,03	0,02	0,03	0,02	0,04	0,03	0,05	0,03	●		
M.2.1	0,9	0,7*	0,6*	50	0,02	0,01	0,02	0,02	0,03	0,02	0,03	0,02	0,04	0,03	●		
M.3.1	0,9	0,7*	0,6*	55	0,02	0,01	0,02	0,02	0,03	0,02	0,03	0,02	0,04	0,03	●		
K.1.1	0,9	0,7*	0,6*	225	0,07	0,05	0,08	0,06	0,09	0,07	0,11	0,08	0,13	0,09		●	
K.1.2	0,9	0,7*	0,6*	170	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,09	0,06		●	
K.2.1	0,9	0,7*	0,6*	205	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,11	0,08		●	
K.2.2	0,9	0,7*	0,6*	170	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,09	0,06		●	
K.3.1	0,9	0,7*	0,6*	150	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,09	0,06		●	
K.3.2	0,9	0,7*	0,6*	140	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06		●	
N.1.1	0,9	0,7*	0,6*	785	0,08	0,05	0,09	0,06	0,10	0,07	0,13	0,09	0,15	0,10	●		○
N.1.2	0,9	0,7*	0,6*	715	0,07	0,05	0,08	0,06	0,09	0,07	0,12	0,08	0,13	0,09	●		○
N.2.1	0,9	0,7*	0,6*	475	0,07	0,05	0,09	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		○
N.2.2	0,9	0,7*	0,6*	380	0,08	0,05	0,09	0,06	0,10	0,07	0,13	0,09	0,15	0,10	●		○
N.2.3	0,9	0,7*	0,6*	275	0,08	0,06	0,10	0,07	0,11	0,08	0,14	0,10	0,16	0,11	●		○
N.3.1	0,9	0,7*	0,6*	340	0,03	0,02	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	●		○
N.3.2	0,9	0,7*	0,6*	205	0,06	0,04	0,07	0,05	0,08	0,05	0,09	0,07	0,11	0,07	●		○
N.3.3	0,9	0,7*	0,6*	275	0,06	0,04	0,07	0,05	0,08	0,05	0,09	0,07	0,11	0,07	●		○
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1																	
S.3.2																	
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – HFC milling heads

Index	52 864 ...																					● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	$a_{p\,max.}$ x DCX	Feedrates for extra short and short holder																Emulsion	Compressed air	MMS
						Ø DCX (mm) =																		
						8			10			12			16			20						
						a_e x DCX =																		
						0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0				
						f_z (mm)																		
P.1.1	0,9	0,7*	0,6*	175	0,05	0,44	0,31	0,20	0,53	0,37	0,24	0,61	0,43	0,27	0,74	0,52	0,33	0,85	0,60	0,38		○	●	○
P.1.2	0,9	0,7*	0,6*	165	0,05	0,42	0,30	0,19	0,50	0,36	0,22	0,58	0,41	0,26	0,71	0,50	0,32	0,81	0,57	0,36		○	●	○
P.1.3	0,9	0,7*	0,6*	160	0,05	0,40	0,28	0,18	0,48	0,34	0,21	0,55	0,39	0,25	0,67	0,48	0,30	0,77	0,54	0,34		○	●	○
P.1.4	0,9	0,7*	0,6*	150	0,05	0,38	0,27	0,17	0,45	0,32	0,20	0,52	0,37	0,23	0,64	0,45	0,29	0,73	0,52	0,33		○	●	○
P.1.5	0,9	0,7*	0,6*	145	0,05	0,36	0,25	0,16	0,43	0,30	0,19	0,50	0,35	0,22	0,60	0,43	0,27	0,69	0,49	0,31		○	●	○
P.2.1	0,9	0,7*	0,6*	160	0,05	0,44	0,31	0,20	0,53	0,37	0,24	0,61	0,43	0,27	0,74	0,52	0,33	0,85	0,60	0,38		○	●	○
P.2.2	0,9	0,7*	0,6*	145	0,05	0,40	0,28	0,18	0,48	0,34	0,21	0,55	0,39	0,25	0,67	0,48	0,30	0,77	0,54	0,34		○	●	○
P.2.3	0,9	0,7*	0,6*	130	0,05	0,36	0,25	0,16	0,43	0,30	0,19	0,50	0,35	0,22	0,60	0,43	0,27	0,69	0,49	0,31		○	●	○
P.2.4	0,9	0,7*	0,6*	100	0,05	0,33	0,24	0,15	0,40	0,28	0,18	0,46	0,32	0,21	0,56	0,40	0,25	0,64	0,45	0,29		○	●	○
P.3.1	0,9	0,7*	0,6*	95	0,05	0,39	0,27	0,17	0,46	0,33	0,21	0,53	0,38	0,24	0,65	0,46	0,29	0,74	0,53	0,33		●		○
P.3.2	0,9	0,7*	0,6*	85	0,05	0,37	0,26	0,16	0,44	0,31	0,20	0,50	0,36	0,23	0,62	0,44	0,28	0,70	0,50	0,32		●		○
P.3.3	0,9	0,7*	0,6*	80	0,05	0,35	0,24	0,15	0,41	0,29	0,19	0,48	0,34	0,21	0,58	0,41	0,26	0,67	0,47	0,30		●		○
P.4.1	0,9	0,7*	0,6*	65	0,05	0,27	0,19	0,12	0,32	0,23	0,14	0,37	0,26	0,16	0,45	0,32	0,20	0,51	0,36	0,23		●		○
P.4.2	0,9	0,7*	0,6*	65	0,05	0,27	0,19	0,12	0,32	0,23	0,14	0,37	0,26	0,16	0,45	0,32	0,20	0,51	0,36	0,23		●		○
M.1.1	0,9	0,7*	0,6*	45	0,05	0,23	0,16	0,10	0,28	0,20	0,12	0,32	0,23	0,14	0,39	0,28	0,18	0,45	0,32	0,20		●		
M.2.1	0,9	0,7*	0,6*	40	0,05	0,19	0,14	0,09	0,23	0,16	0,10	0,27	0,19	0,12	0,32	0,23	0,15	0,37	0,26	0,17		●		
M.3.1	0,9	0,7*	0,6*	45	0,05	0,20	0,14	0,09	0,24	0,17	0,11	0,28	0,19	0,12	0,34	0,24	0,15	0,38	0,27	0,17		●		
K.1.1	0,9	0,7*	0,6*	175	0,05	0,67	0,47	0,30	0,80	0,56	0,36	0,92	0,65	0,41	1,12	0,79	0,50	1,28	0,91	0,57			●	
K.1.2	0,9	0,7*	0,6*	130	0,05	0,47	0,33	0,21	0,56	0,39	0,25	0,64	0,45	0,29	0,78	0,55	0,35	0,90	0,63	0,40			●	
K.2.1	0,9	0,7*	0,6*	160	0,05	0,57	0,40	0,25	0,68	0,48	0,30	0,78	0,55	0,35	0,95	0,67	0,43	1,09	0,77	0,49			●	
K.2.2	0,9	0,7*	0,6*	130	0,05	0,47	0,33	0,21	0,56	0,39	0,25	0,64	0,45	0,29	0,78	0,55	0,35	0,90	0,63	0,40			●	
K.3.1	0,9	0,7*	0,6*	115	0,05	0,47	0,33	0,21	0,56	0,39	0,25	0,64	0,45	0,29	0,78	0,55	0,35	0,90	0,63	0,40			●	
K.3.2	0,9	0,7*	0,6*	110	0,05	0,40	0,28	0,18	0,48	0,34	0,21	0,55	0,39	0,25	0,67	0,48	0,30	0,77	0,54	0,34			●	
N.1.1																								
N.1.2																								
N.2.1																								
N.2.2																								
N.2.3																								
N.3.1																								
N.3.2																								
N.3.3																								
N.4.1																								
S.1.1																								
S.1.2																								
S.2.1																								
S.2.2																								
S.2.3																								
S.3.1																								
S.3.2																								
S.3.3																								
H.1.1																								
H.1.2																								
H.1.3																								
H.1.4																								
H.2.1																								
H.3.1																								
O.1.1																								
O.1.2																								
O.2.1																								
O.2.2																								
O.3.1																								

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Finishing milling heads

Index	52 863 ...									● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder Ø DC (mm) = 8 $a_{p\,max.}$ = 7,5 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 10 $a_{p\,max.}$ = 9,4 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 12 $a_{p\,max.}$ = 11,3 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 16 $a_{p\,max.}$ = 15,0 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 20 $a_{p\,max.}$ = 18,8 a_e x DC = 0,1–0,2 f_z (mm)	Emulsion	Compressed air	MMS
P.1.1	0,9	0,7*	0,6*	405	0,04	0,05	0,06	0,08	0,09	○	●	○
P.1.2	0,9	0,7*	0,6*	385	0,04	0,05	0,06	0,07	0,08	○	●	○
P.1.3	0,9	0,7*	0,6*	365	0,04	0,05	0,06	0,07	0,08	○	●	○
P.1.4	0,9	0,7*	0,6*	350	0,04	0,05	0,05	0,06	0,07	○	●	○
P.1.5	0,9	0,7*	0,6*	330	0,04	0,04	0,05	0,06	0,07	○	●	○
P.2.1	0,9	0,7*	0,6*	365	0,04	0,05	0,06	0,08	0,09	○	●	○
P.2.2	0,9	0,7*	0,6*	335	0,04	0,05	0,06	0,07	0,08	○	●	○
P.2.3	0,9	0,7*	0,6*	300	0,04	0,04	0,05	0,06	0,07	○	●	○
P.2.4	0,9	0,7*	0,6*	235	0,03	0,04	0,05	0,06	0,06	○	●	○
P.3.1	0,9	0,7*	0,6*	215	0,04	0,05	0,05	0,07	0,08	●		○
P.3.2	0,9	0,7*	0,6*	200	0,04	0,04	0,05	0,06	0,07	●		○
P.3.3	0,9	0,7*	0,6*	185	0,04	0,04	0,05	0,06	0,07	●		○
P.4.1	0,9	0,7*	0,6*	150	0,03	0,03	0,04	0,05	0,05	●		○
P.4.2	0,9	0,7*	0,6*	150	0,03	0,03	0,04	0,05	0,05	●		○
M.1.1	0,9	0,7*	0,6*	100	0,02	0,03	0,03	0,04	0,05	●		
M.2.1	0,9	0,7*	0,6*	95	0,02	0,02	0,03	0,03	0,04	●		
M.3.1	0,9	0,7*	0,6*	100	0,02	0,02	0,03	0,03	0,04	●		
K.1.1	0,9	0,7*	0,6*	400	0,07	0,08	0,09	0,11	0,13		●	
K.1.2	0,9	0,7*	0,6*	300	0,05	0,06	0,07	0,08	0,09		●	
K.2.1	0,9	0,7*	0,6*	365	0,06	0,07	0,08	0,10	0,11		●	
K.2.2	0,9	0,7*	0,6*	300	0,05	0,06	0,07	0,08	0,09		●	
K.3.1	0,9	0,7*	0,6*	265	0,05	0,06	0,07	0,08	0,09		●	
K.3.2	0,9	0,7*	0,6*	250	0,04	0,05	0,06	0,07	0,08		●	
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – Radius torus cutters

Index	52 865 ..., 52 866 ...																		● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder														Emulsion	Compressed air	MMS
					Ø DC (mm) =																
					8			10			12			16			20				
					$a_{p\,max.}$ =																
					4,8	1,6	0,8	5,6	2,0	1,0	6,8	2,4	1,2	9,0	3,2	1,6	11,3	4,0	2,0		
					a_e x DC =																
					0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0		
					f_z (mm)																
P.1.1	0,9	0,7*	0,6*	110	0,027	0,025	0,018	0,032	0,030	0,022	0,037	0,034	0,025	0,045	0,042	0,031	0,051	0,048	0,035	○	●	○
P.1.2	0,9	0,7*	0,6*	105	0,025	0,024	0,017	0,030	0,028	0,021	0,035	0,032	0,024	0,043	0,040	0,029	0,049	0,045	0,033	○	●	○
P.1.3	0,9	0,7*	0,6*	100	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032	○	●	○
P.1.4	0,9	0,7*	0,6*	95	0,023	0,021	0,016	0,027	0,026	0,019	0,032	0,029	0,022	0,039	0,036	0,026	0,044	0,041	0,030	○	●	○
P.1.5	0,9	0,7*	0,6*	90	0,022	0,020	0,015	0,026	0,024	0,018	0,030	0,028	0,020	0,037	0,034	0,025	0,042	0,039	0,029	○	●	○
P.2.1	0,9	0,7*	0,6*	100	0,027	0,025	0,018	0,032	0,030	0,022	0,037	0,034	0,025	0,045	0,042	0,031	0,051	0,048	0,035	○	●	○
P.2.2	0,9	0,7*	0,6*	90	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032	○	●	○
P.2.3	0,9	0,7*	0,6*	80	0,022	0,020	0,015	0,026	0,024	0,018	0,030	0,028	0,020	0,037	0,034	0,025	0,042	0,039	0,029	○	●	○
P.2.4	0,9	0,7*	0,6*	65	0,020	0,019	0,014	0,024	0,022	0,016	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,026	○	●	○
P.3.1	0,9	0,7*	0,6*	60	0,023	0,022	0,016	0,028	0,026	0,019	0,032	0,030	0,022	0,039	0,037	0,027	0,045	0,042	0,031	●		○
P.3.2	0,9	0,7*	0,6*	55	0,022	0,021	0,015	0,026	0,025	0,018	0,030	0,028	0,021	0,037	0,035	0,025	0,043	0,040	0,029	●		○
P.3.3	0,9	0,7*	0,6*	50	0,021	0,019	0,014	0,025	0,023	0,017	0,029	0,027	0,020	0,035	0,033	0,024	0,040	0,037	0,028	●		○
P.4.1	0,9	0,7*	0,6*	40	0,016	0,015	0,011	0,019	0,018	0,013	0,022	0,021	0,015	0,027	0,025	0,019	0,031	0,029	0,021	●		○
P.4.2	0,9	0,7*	0,6*	40	0,016	0,015	0,011	0,019	0,018	0,013	0,022	0,021	0,015	0,027	0,025	0,019	0,031	0,029	0,021	●		○
M.1.1	0,9	0,7*	0,6*	27	0,014	0,013	0,010	0,017	0,016	0,012	0,019	0,018	0,013	0,024	0,022	0,016	0,027	0,025	0,019	●		
M.2.1	0,9	0,7*	0,6*	25	0,012	0,011	0,008	0,014	0,013	0,010	0,016	0,015	0,011	0,020	0,018	0,013	0,022	0,021	0,015	●		
M.3.1	0,9	0,7*	0,6*	27	0,012	0,011	0,008	0,014	0,013	0,010	0,017	0,015	0,011	0,020	0,019	0,014	0,023	0,022	0,016	●		
K.1.1	0,9	0,7*	0,6*	110	0,040	0,037	0,028	0,048	0,045	0,033	0,055	0,052	0,038	0,068	0,063	0,046	0,077	0,072	0,053		●	
K.1.2	0,9	0,7*	0,6*	80	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.2.1	0,9	0,7*	0,6*	100	0,034	0,032	0,023	0,041	0,038	0,028	0,047	0,044	0,032	0,057	0,054	0,039	0,066	0,061	0,045		●	
K.2.2	0,9	0,7*	0,6*	80	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.3.1	0,9	0,7*	0,6*	70	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.3.2	0,9	0,7*	0,6*	70	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032		●	
N.1.1	0,9	0,7*	0,6*	420	0,045	0,042	0,031	0,054	0,050	0,037	0,062	0,058	0,042	0,076	0,071	0,052	0,087	0,081	0,059	●		○
N.1.2	0,9	0,7*	0,6*	380	0,041	0,038	0,028	0,049	0,046	0,034	0,056	0,053	0,039	0,069	0,064	0,047	0,079	0,073	0,054	●		○
N.2.1	0,9	0,7*	0,6*	255	0,043	0,040	0,029	0,052	0,048	0,035	0,059	0,055	0,041	0,072	0,067	0,050	0,083	0,077	0,057	●		○
N.2.2	0,9	0,7*	0,6*	205	0,045	0,042	0,031	0,054	0,050	0,037	0,062	0,058	0,042	0,076	0,071	0,052	0,087	0,081	0,059	●		○
N.2.3	0,9	0,7*	0,6*	145	0,049	0,046	0,034	0,059	0,055	0,040	0,068	0,063	0,046	0,083	0,077	0,057	0,095	0,088	0,065	●		○
N.3.1	0,9	0,7*	0,6*	185	0,020	0,019	0,014	0,025	0,023	0,017	0,028	0,026	0,019	0,034	0,032	0,024	0,039	0,037	0,027	●		○
N.3.2	0,9	0,7*	0,6*	110	0,033	0,031	0,022	0,039	0,037	0,027	0,045	0,042	0,031	0,055	0,051	0,038	0,063	0,059	0,043	●		○
N.3.3	0,9	0,7*	0,6*	145	0,033	0,031	0,022	0,039	0,037	0,027	0,045	0,042	0,031	0,055	0,051	0,038	0,063	0,059	0,043	●		○
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Radius torus cutters – HSC machining

Index	52 865 ..., 52 866 ...									● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder Ø DC (mm) = 8	10	12	16	20	Emulsion	Compressed air	MMS
					a_e/a_p = 0,04	0,05	0,06	0,08	0,10			
					f_z (mm)							
P.1.1	0,9	0,7*	0,6*	385	0,11	0,11	0,11	0,11	0,11	○	●	○
P.1.2	0,9	0,7*	0,6*	365	0,10	0,11	0,11	0,11	0,11	○	●	○
P.1.3	0,9	0,7*	0,6*	350	0,10	0,10	0,10	0,10	0,10	○	●	○
P.1.4	0,9	0,7*	0,6*	330	0,09	0,10	0,10	0,10	0,10	○	●	○
P.1.5	0,9	0,7*	0,6*	315	0,09	0,09	0,09	0,09	0,09	○	●	○
P.2.1	0,9	0,7*	0,6*	350	0,11	0,11	0,11	0,11	0,11	○	●	○
P.2.2	0,9	0,7*	0,6*	315	0,10	0,10	0,10	0,10	0,10	○	●	○
P.2.3	0,9	0,7*	0,6*	285	0,09	0,09	0,09	0,09	0,09	○	●	○
P.2.4	0,9	0,7*	0,6*	220	0,08	0,08	0,09	0,09	0,08	○	●	○
P.3.1	0,9	0,7*	0,6*	205	0,09	0,10	0,10	0,10	0,10	●		○
P.3.2	0,9	0,7*	0,6*	190	0,09	0,09	0,09	0,09	0,09	●		○
P.3.3	0,9	0,7*	0,6*	175	0,08	0,09	0,09	0,09	0,09	●		○
P.4.1	0,9	0,7*	0,6*	140	0,07	0,07	0,07	0,07	0,07	●		○
P.4.2	0,9	0,7*	0,6*	140	0,07	0,07	0,07	0,07	0,07	●		○
M.1.1	0,9	0,7*	0,6*	95	0,06	0,06	0,06	0,06	0,06	●		
M.2.1	0,9	0,7*	0,6*	90	0,05	0,05	0,05	0,05	0,05	●		
M.3.1	0,9	0,7*	0,6*	95	0,05	0,05	0,05	0,05	0,05	●		
K.1.1	0,9	0,7*	0,6*	380	0,16	0,17	0,17	0,17	0,17		●	
K.1.2	0,9	0,7*	0,6*	285	0,11	0,12	0,12	0,12	0,12		●	
K.2.1	0,9	0,7*	0,6*	350	0,14	0,14	0,14	0,15	0,14		●	
K.2.2	0,9	0,7*	0,6*	285	0,11	0,12	0,12	0,12	0,12		●	
K.3.1	0,9	0,7*	0,6*	255	0,11	0,12	0,12	0,12	0,12		●	
K.3.2	0,9	0,7*	0,6*	235	0,10	0,10	0,10	0,10	0,10		●	
N.1.1	0,9	0,7*	0,6*	840	0,18	0,19	0,19	0,19	0,19	●		○
N.1.2	0,9	0,7*	0,6*	765	0,17	0,17	0,17	0,17	0,17	●		○
N.2.1	0,9	0,7*	0,6*	510	0,17	0,18	0,18	0,18	0,18	●		○
N.2.2	0,9	0,7*	0,6*	405	0,18	0,19	0,19	0,19	0,19	●		○
N.2.3	0,9	0,7*	0,6*	290	0,20	0,21	0,21	0,21	0,20	●		○
N.3.1	0,9	0,7*	0,6*	365	0,08	0,09	0,09	0,09	0,09	●		○
N.3.2	0,9	0,7*	0,6*	220	0,13	0,14	0,14	0,14	0,14	●		○
N.3.3	0,9	0,7*	0,6*	290	0,13	0,14	0,14	0,14	0,14	●		○
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1				150	0,083	0,086	0,087	0,087	0,085	●		
O.1.2				100	0,083	0,086	0,087	0,087	0,085	●		
O.2.1												
O.2.2												
O.3.1												

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – Torus cutter heads

● 1st choice
○ suitable

Index	52 865 ..., 52 866 ...																					
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder															Emulsion	Compressed air	MMS
					Ø DC (mm) =																	
					8			10			12			16			20					
					$a_{p\,max.}$ =																	
					4,8	1,6	0,8	5,6	2,0	1,0	6,8	2,4	1,2	9,0	3,2	1,6	11,3	4,0	2,0			
					a_e x DC =																	
					0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0			
					f_z (mm)																	
P.1.1	0,9	0,7*	0,6*	110	0,027	0,025	0,018	0,032	0,030	0,022	0,037	0,034	0,025	0,045	0,042	0,031	0,051	0,048	0,035	○	●	○
P.1.2	0,9	0,7*	0,6*	105	0,025	0,024	0,017	0,030	0,028	0,021	0,035	0,032	0,024	0,043	0,040	0,029	0,049	0,045	0,033	○	●	○
P.1.3	0,9	0,7*	0,6*	100	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032	○	●	○
P.1.4	0,9	0,7*	0,6*	95	0,023	0,021	0,016	0,027	0,026	0,019	0,032	0,029	0,022	0,039	0,036	0,026	0,044	0,041	0,030	○	●	○
P.1.5	0,9	0,7*	0,6*	90	0,022	0,020	0,015	0,026	0,024	0,018	0,030	0,028	0,020	0,037	0,034	0,025	0,042	0,039	0,029	○	●	○
P.2.1	0,9	0,7*	0,6*	100	0,027	0,025	0,018	0,032	0,030	0,022	0,037	0,034	0,025	0,045	0,042	0,031	0,051	0,048	0,035	○	●	○
P.2.2	0,9	0,7*	0,6*	90	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032	○	●	○
P.2.3	0,9	0,7*	0,6*	80	0,022	0,020	0,015	0,026	0,024	0,018	0,030	0,028	0,020	0,037	0,034	0,025	0,042	0,039	0,029	○	●	○
P.2.4	0,9	0,7*	0,6*	65	0,020	0,019	0,014	0,024	0,022	0,016	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,026	○	●	○
P.3.1	0,9	0,7*	0,6*	60	0,023	0,022	0,016	0,028	0,026	0,019	0,032	0,030	0,022	0,039	0,037	0,027	0,045	0,042	0,031	●		○
P.3.2	0,9	0,7*	0,6*	55	0,022	0,021	0,015	0,026	0,025	0,018	0,030	0,028	0,021	0,037	0,035	0,025	0,043	0,040	0,029	●		○
P.3.3	0,9	0,7*	0,6*	50	0,021	0,019	0,014	0,025	0,023	0,017	0,029	0,027	0,020	0,035	0,033	0,024	0,040	0,037	0,028	●		○
P.4.1	0,9	0,7*	0,6*	40	0,016	0,015	0,011	0,019	0,018	0,013	0,022	0,021	0,015	0,027	0,025	0,019	0,031	0,029	0,021	●		○
P.4.2	0,9	0,7*	0,6*	40	0,016	0,015	0,011	0,019	0,018	0,013	0,022	0,021	0,015	0,027	0,025	0,019	0,031	0,029	0,021	●		○
M.1.1	0,9	0,7*	0,6*	27	0,014	0,013	0,010	0,017	0,016	0,012	0,019	0,018	0,013	0,024	0,022	0,016	0,027	0,025	0,019	●		
M.2.1	0,9	0,7*	0,6*	25	0,012	0,011	0,008	0,014	0,013	0,010	0,016	0,015	0,011	0,020	0,018	0,013	0,022	0,021	0,015	●		
M.3.1	0,9	0,7*	0,6*	27	0,012	0,011	0,008	0,014	0,013	0,010	0,017	0,015	0,011	0,020	0,019	0,014	0,023	0,022	0,016	●		
K.1.1	0,9	0,7*	0,6*	110	0,040	0,037	0,028	0,048	0,045	0,033	0,055	0,052	0,038	0,068	0,063	0,046	0,077	0,072	0,053		●	
K.1.2	0,9	0,7*	0,6*	80	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.2.1	0,9	0,7*	0,6*	100	0,034	0,032	0,023	0,041	0,038	0,028	0,047	0,044	0,032	0,057	0,054	0,039	0,066	0,061	0,045		●	
K.2.2	0,9	0,7*	0,6*	80	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.3.1	0,9	0,7*	0,6*	70	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.3.2	0,9	0,7*	0,6*	70	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032		●	
N.1.1	0,9	0,7*	0,6*	420	0,045	0,042	0,031	0,054	0,050	0,037	0,062	0,058	0,042	0,076	0,071	0,052	0,087	0,081	0,059	●		○
N.1.2	0,9	0,7*	0,6*	380	0,041	0,038	0,028	0,049	0,046	0,034	0,056	0,053	0,039	0,069	0,064	0,047	0,079	0,073	0,054	●		○
N.2.1	0,9	0,7*	0,6*	255	0,043	0,040	0,029	0,052	0,048	0,035	0,059	0,055	0,041	0,072	0,067	0,050	0,083	0,077	0,057	●		○
N.2.2	0,9	0,7*	0,6*	205	0,045	0,042	0,031	0,054	0,050	0,037	0,062	0,058	0,042	0,076	0,071	0,052	0,087	0,081	0,059	●		○
N.2.3	0,9	0,7*	0,6*	145	0,049	0,046	0,034	0,059	0,055	0,040	0,068	0,063	0,046	0,083	0,077	0,057	0,095	0,088	0,065	●		○
N.3.1	0,9	0,7*	0,6*	185	0,020	0,019	0,014	0,025	0,023	0,017	0,028	0,026	0,019	0,034	0,032	0,024	0,039	0,037	0,027	●		○
N.3.2	0,9	0,7*	0,6*	110	0,033	0,031	0,022	0,039	0,037	0,027	0,045	0,042	0,031	0,055	0,051	0,038	0,063	0,059	0,043	●		○
N.3.3	0,9	0,7*	0,6*	145	0,033	0,031	0,022	0,039	0,037	0,027	0,045	0,042	0,031	0,055	0,051	0,038	0,063	0,059	0,043	●		○
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Quarter-round cutter heads

Index	v_c (m/min)	52 869 ... Ø DCX (mm) = 8 PRFRAD = 0,5 f_z (mm)	8 1,0	10 1,5	10 2,0	12 2,5	12 3,0	12 3,5	16 4,0	16 4,5	16 5,0	20 5,0	20 6,0	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	150	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08	○	●	○
P.1.2	170	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	○	●	○
P.1.3	130	0,03	0,04	0,03	0,05	0,05	0,04	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.1.4	120	0,03	0,04	0,03	0,05	0,05	0,04	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.1.5	170	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	○	●	○
P.2.1	130	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07	○	●	○
P.2.2	130	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07	○	●	○
P.2.3	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.2.4	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.3.1	80	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	○	●	○
P.3.2	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
P.3.3	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
P.4.1	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
P.4.2	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
M.1.1	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
M.2.1	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
M.3.1	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
K.1.1	130	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09		●	
K.1.2	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08		●	
K.2.1	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
K.2.2	100	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07		●	
K.3.1	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
K.3.2	90	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07		●	
N.1.1	430	0,05	0,04	0,06	0,05	0,09	0,08	0,07	0,12	0,11	0,1	0,14	0,13	●		○
N.1.2	380	0,05	0,04	0,06	0,05	0,09	0,08	0,07	0,12	0,11	0,1	0,14	0,13	●		○
N.2.1	260	0,05	0,04	0,05	0,05	0,08	0,07	0,06	0,11	0,1	0,09	0,12	0,12	●		○
N.2.2	320	0,05	0,04	0,06	0,05	0,08	0,07	0,07	0,11	0,11	0,1	0,13	0,12	●		○
N.2.3	130	0,04	0,03	0,05	0,04	0,07	0,06	0,05	0,1	0,09	0,08	0,11	0,1	●		○
N.3.1	190	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	●		○
N.3.2	170	0,02	0,02	0,02	0,02	0,03	0,03	0,03	0,04	0,04	0,04	0,05	0,05	●		○
N.3.3	140	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		○
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – Deburring milling heads

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	52 867 ...				52 868 ...				● 1st choice ○ suitable		
					Feedrates for extra short and short holder										
					Ø DCX (mm) =				Ø DCX (mm) =						
					10	12	16	20	10	12	16	20			
					$a_{p\,max.}$ (mm) =				$a_{p\,max.}$ (mm) =						
					5,0	6,0	4,8	6,0	1,25	1,5	2,0	2,5			
					a_e 0,1– 0,2 x DCX				a_e 0,1– 0,2 x DCX						
					f_z (mm)								Emulsion	Compressed air	MMS
P.1.1	0,9	0,7	0,6	200	0,06	0,07	0,08	0,09	0,06	0,07	0,08	0,09	○	●	○
P.1.2	0,9	0,7	0,6	190	0,06	0,06	0,08	0,09	0,06	0,06	0,08	0,09	○	●	○
P.1.3	0,9	0,7	0,6	185	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	○	●	○
P.1.4	0,9	0,7	0,6	175	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	○	●	○
P.1.5	0,9	0,7	0,6	165	0,05	0,05	0,07	0,08	0,05	0,05	0,07	0,08	○	●	○
P.2.1	0,9	0,7	0,6	185	0,06	0,07	0,08	0,09	0,06	0,07	0,08	0,09	○	●	○
P.2.2	0,9	0,7	0,6	165	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	○	●	○
P.2.3	0,9	0,7	0,6	150	0,05	0,05	0,07	0,08	0,05	0,05	0,07	0,08	○	●	○
P.2.4	0,9	0,7	0,6	115	0,04	0,05	0,06	0,07	0,04	0,05	0,06	0,07	○	●	○
P.3.1	0,9	0,7	0,6	110	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	●		○
P.3.2	0,9	0,7	0,6	100	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	●		○
P.3.3	0,9	0,7	0,6	90	0,05	0,05	0,06	0,07	0,05	0,05	0,06	0,07	●		○
P.4.1	0,9	0,7	0,6	75	0,04	0,04	0,05	0,06	0,04	0,04	0,05	0,06	●		○
P.4.2	0,9	0,7	0,6	75	0,04	0,04	0,05	0,06	0,04	0,04	0,05	0,06	●		○
M.1.1	0,9	0,7	0,6	50	0,03	0,04	0,04	0,05	0,03	0,04	0,04	0,05	●		
M.2.1	0,9	0,7	0,6	45	0,03	0,03	0,04	0,04	0,03	0,03	0,04	0,04	●		
M.3.1	0,9	0,7	0,6	50	0,03	0,03	0,04	0,04	0,03	0,03	0,04	0,04	●		
K.1.1	0,9	0,7	0,6	200	0,09	0,10	0,12	0,14	0,09	0,10	0,12	0,14		●	
K.1.2	0,9	0,7	0,6	150	0,06	0,07	0,09	0,10	0,06	0,07	0,09	0,10		●	
K.2.1	0,9	0,7	0,6	185	0,07	0,09	0,11	0,12	0,07	0,09	0,11	0,12		●	
K.2.2	0,9	0,7	0,6	150	0,06	0,07	0,09	0,10	0,06	0,07	0,09	0,10		●	
K.3.1	0,9	0,7	0,6	135	0,06	0,07	0,09	0,10	0,06	0,07	0,09	0,10		●	
K.3.2	0,9	0,7	0,6	125	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08		●	
N.1.1	0,9	0,7	0,6	550	0,10	0,11	0,14	0,16	0,10	0,11	0,14	0,16	●		○
N.1.2	0,9	0,7	0,6	500	0,09	0,10	0,13	0,14	0,09	0,10	0,13	0,14	●		○
N.2.1	0,9	0,7	0,6	330	0,09	0,11	0,13	0,15	0,09	0,11	0,13	0,15	●		○
N.2.2	0,9	0,7	0,6	265	0,10	0,11	0,14	0,16	0,10	0,11	0,14	0,16	●		○
N.2.3	0,9	0,7	0,6	190	0,11	0,12	0,15	0,17	0,11	0,12	0,15	0,17	●		○
N.3.1	0,9	0,7	0,6	240	0,04	0,05	0,06	0,07	0,04	0,05	0,06	0,07	●		○
N.3.2	0,9	0,7	0,6	145	0,07	0,08	0,10	0,12	0,07	0,08	0,10	0,12	●		○
N.3.3	0,9	0,7	0,6	190	0,07	0,08	0,10	0,12	0,07	0,08	0,10	0,12	●		○
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

For unstable applications the machining parameters must be reduced.

Cutting data standard values – T-slot milling cutter

Index	v_c (m/min)	54 065 ... Ø DC (mm) = 11,0	12,5	16,0	18,0	19,0	21,0	22,0	25,0	28,0	32,0	36,0	40,0	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)														
P.1.1	72	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.2	68	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.3	68	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.4	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.5	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.1	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.2	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.3	56	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.4	56	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.3.1	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.3.2	60	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.3.3	52	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.4.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
P.4.2	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
M.1.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
M.2.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
M.3.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
K.1.1	68	0,040	0,048	0,056	0,067	0,075	0,080	0,080	0,080	0,093	0,093	0,105	0,117	●		
K.1.2	56	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.2.1	64	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.2.2	52	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.3.1	56	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.3.2	54	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The feed f_z must be reduced by 50% until the tool is fully engaged.

14

Cutting data standard values – mini milling cutter, uncoated

Index	Extra-short type		50 608 ..., 50 664 ...															
			Ø DC (mm) =															
			0,5		1,0		1,2		1,5		1,8–2,0		2,5–3,0			3,5–4,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1																		
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1																		
P.2.2																		
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1																		
P.4.2																		
M.1.1																		
M.2.1																		
M.3.1																		
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1	250	1,0	0,007	0,006	0,011	0,009	0,014	0,011	0,018	0,014	0,024	0,019	0,038	0,030	0,019	0,050	0,040	0,025
N.1.2	250	1,0	0,007	0,006	0,011	0,009	0,014	0,011	0,018	0,014	0,024	0,019	0,038	0,030	0,019	0,050	0,040	0,025
N.2.1	180	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
N.2.2	180	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
N.2.3	150	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
N.3.1	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.2	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.3	140	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.4.1	180	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1	50	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.2	20	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	50 608 ..., 50 664 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	4,5–5,0			5,5–6,0			6,7–8,0			8,7–10,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1															
P.1.2															
P.1.3															
P.1.4															
P.1.5															
P.2.1															
P.2.2															
P.2.3															
P.2.4															
P.3.1															
P.3.2															
P.3.3															
P.4.1															
P.4.2															
M.1.1															
M.2.1															
M.3.1															
K.1.1															
K.1.2															
K.2.1															
K.2.2															
K.3.1															
K.3.2															
N.1.1	0,064	0,051	0,032	0,077	0,062	0,039	0,104	0,083	0,052	0,130	0,104	0,065	●		○
N.1.2	0,064	0,051	0,032	0,077	0,062	0,039	0,104	0,083	0,052	0,130	0,104	0,065	●		○
N.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
N.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
N.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
N.3.1	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.2	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.3	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.4.1	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – mini milling cutter, coated

Index	Extra-short type		50 609 ..., 50 691 ...															
			Ø DC (mm) =															
			0,5		1,0		1,2		1,5		1,8–2,0		2,5–3,0			3,5–4,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	110	1,0	0,011	0,009	0,014	0,011	0,015	0,012	0,017	0,014	0,020	0,016	0,027	0,022	0,014	0,034	0,027	0,017
P.1.2	90	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.1.3	90	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.1.4	80	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.1.5	80	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.1	90	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.2	70	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.3	70	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.4	55	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	50	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
P.4.2	40	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
M.1.1	40	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
M.2.1	50	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
M.3.1	50	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
K.1.1	130	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
K.1.2	120	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
K.2.1	130	1,0	0,017	0,014	0,020	0,016	0,022	0,018	0,024	0,019	0,028	0,022	0,035	0,028	0,018	0,042	0,034	0,021
K.2.2	120	1,0	0,017	0,014	0,020	0,016	0,022	0,018	0,024	0,019	0,028	0,022	0,035	0,028	0,018	0,042	0,034	0,021
K.3.1	130	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
K.3.2	120	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.2	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.3	140	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.4.1																		
S.1.1	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.1.2	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.2.1	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.2.2	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.2.3	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.1	50	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.2	20	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	50 609 ..., 50 691 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	4,5–5,0			5,5–6,0			6,7–8,0			8,7–10,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038	○	●	○
P.1.2	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.1.3	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.1.4	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.1.5	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.1	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.2	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.3	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.4	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.3.1															
P.3.2															
P.3.3															
P.4.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
P.4.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
M.1.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
M.2.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
M.3.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
K.1.1	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
K.1.2	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
K.2.1	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	○	●	○
K.2.2	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	○	●	○
K.3.1	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
K.3.2	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.2	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.3	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.4.1															
S.1.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.1.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.2.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.2.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.2.3	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – End mill – W version, short

Index	HPC		54 590..., 54 592..., 54 591..., 54 593..., 54 594..., 54 595..., 54 596..., 54 597..., 54 610..., 54 611..., 54 612..., 54 613..., 54 640..., 54 642...																	
			Ø DC (mm) =																	
			2,7–3,0			3,7–4,0			4,7–5,0			5,7–7,0			7,7–9,0			9,7–11,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
N.1.1	560	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.1.2	560	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.2.1	336	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.2.2	336	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.2.3	224	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.3.1	224	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,160	0,120	0,080	0,200	0,150	0,100
N.3.2	160	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,160	0,120	0,080	0,200	0,150	0,100
N.3.3	160	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,160	0,120	0,080	0,200	0,150	0,100
N.4.1																				

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cutting data standard values – End mill – W version, long

Index	HPC		50 960 ..., 54 590 ..., 54 592 ..., 54 591 ..., 54 593 ..., 54 594 ..., 54 595 ..., 54 596 ..., 54 597 ..., 54 610 ..., 54 611 ..., 54 612 ..., 54 613 ..., 54 620 ..., 54 622 ..., 54 630 ..., 54 631 ..., 54 632..., 54 633..., 54 640 ..., 54 642 ...																	
			Ø DC (mm) =																	
			2,7–3,0			3,7–4,0			4,7–5,0			5,7–7,0			7,7–9,0			9,7–11,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
N.1.1	320	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.1.2	320	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.2.1	192	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.2.2	192	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.2.3	128	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.3.1	128	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,140	0,100	0,070	0,180	0,130	0,090
N.3.2	92	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,140	0,100	0,070	0,180	0,130	0,090
N.3.3	92	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,140	0,100	0,070	0,180	0,130	0,090
N.4.1																				

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cutting data standard values – End mill – W and WR version, extra long

Index	HPC		54 590 ..., 54 592 ..., 54 610 ..., 54 612 ..., 54 625 ..., 54 627..., 54 630 ..., 54 631 ..., 54 632 ..., 54 633 ..., 54 650 ..., 54 652 ..., 54 640 ..., 54 642 ...																	
			Ø DC (mm) =																	
			2,7–3,0			3,7–4,0			4,7–5,0			5,7–7,0			7,7–9,0			9,7–11,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
N.1.1	240	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.1.2	240	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.2.1	144	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.2.2	144	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.2.3	100	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.3.1	100	0,750*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,040	0,030	0,020	0,050	0,040	0,030
N.3.2	72	0,750*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,040	0,030	0,020	0,050	0,040	0,030
N.3.3	72	0,750*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,040	0,030	0,020	0,050	0,040	0,030
N.4.1																				

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cooling lubrication with emulsion

Feed rate guide values for ball nosed and torus cutters on → **Page 486**

Index	54 590..., 54 592..., 54 591..., 54 593..., 54 594..., 54 595..., 54 596..., 54 597..., 54 610..., 54 611..., 54 612..., 54 613..., 54 640..., 54 642...																		Emulsion	MMS
	Ø DC (mm) =																			
	11,7–13,0			13,7–15,0			15,7–16,0			18,0			19,7–20,0			24,7–25,0				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		
	f_z (mm)																			
N.1.1	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.1.2	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.2.1	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.2.2	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.2.3	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.3.1	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,240	0,320	0,260	0,200	●	●
N.3.2	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,240	0,320	0,260	0,200	●	●
N.3.3	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,240	0,320	0,260	0,200	●	●
N.4.1																				

Index	50 960 ..., 54 590 ..., 54 592 ..., 54 591 ..., 54 593 ..., 54 594 ..., 54 595 ..., 54 596 ..., 54 597 ..., 54 610 ..., 54 611 ..., 54 612 ..., 54 613 ..., 54 620 ..., 54 622 ..., 54 630 ..., 54 631 ..., 54 632..., 54 633..., 54 640 ..., 54 642 ...																		Emulsion	MMS
	Ø DC (mm) =																			
	11,7–13,0			13,7–15,0			15,7–16,0			18,0			19,7–20,0			24,7–25,0				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		
	f_z (mm)																			
N.1.1	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.1.2	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.2.1	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.2.2	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.2.3	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.3.1	0,200	0,160	0,110	0,220	0,170	0,120	0,230	0,180	0,130	0,260	0,200	0,140	0,260	0,210	0,150	0,290	0,230	0,180	●	●
N.3.2	0,200	0,160	0,110	0,220	0,170	0,120	0,230	0,180	0,130	0,260	0,200	0,140	0,260	0,210	0,150	0,290	0,230	0,180	●	●
N.3.3	0,200	0,160	0,110	0,220	0,170	0,120	0,230	0,180	0,130	0,260	0,200	0,140	0,260	0,210	0,150	0,290	0,230	0,180	●	●
N.4.1																				

Index	54 590 ..., 54 592 ..., 54 610 ..., 54 612 ..., 54 625 ..., 54 627..., 54 630 ..., 54 631 ..., 54 632 ..., 54 633 ..., 54 650 ..., 54 652 ..., 54 640 ..., 54 642 ...																		Emulsion	MMS
	Ø DC (mm) =																			
	11,7–13,0			13,7–15,0			15,7–16,0			18,0			19,7–20,0			24,7–25,0				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		
	f_z (mm)																			
N.1.1	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.1.2	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.2.1	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.2.2	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.2.3	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.3.1	0,060	0,050	0,030	0,070	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,140	0,120	0,090	●	●
N.3.2	0,060	0,050	0,030	0,070	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,140	0,120	0,090	●	●
N.3.3	0,060	0,050	0,030	0,070	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,140	0,120	0,090	●	●
N.4.1																				

Cutting data standard values – End mill

Index	Type short / long		54 070 ..., 54 071 ..., 54 072 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	210	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.2	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.3	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.4	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.5	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.1	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.2	190	1,0	0,022	0,018	0,011	0,030	0,024	0,015	0,038	0,030	0,019	0,046	0,037	0,023	0,062	0,050	0,031	
P.2.3	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.4	170	1,0	0,022	0,018	0,011	0,030	0,024	0,015	0,038	0,030	0,019	0,046	0,037	0,023	0,062	0,050	0,031	
P.3.1	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.3.2	170	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.3.3	140	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.4.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
P.4.2	80	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.1.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.2.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.3.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
K.1.1	200	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
K.1.2	180	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
K.2.1	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.2.2	170	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.3.1	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.3.2	160	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	350	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.3.2	350	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.3.3	280	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.4.1																		
S.1.1	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.1.2	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.1	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.2	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.3	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.3.1	90	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
S.3.2	50	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	54 070 ..., 54 071 ..., 54 072 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.4	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.5	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.2	0,078	0,062	0,039	0,094	0,075	0,047	0,118	0,094	0,059	0,134	0,107	0,067	●	○	○
P.2.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.4	0,078	0,062	0,039	0,094	0,075	0,047	0,118	0,094	0,059	0,134	0,107	0,067	●	○	○
P.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.4.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.1.2	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.3.2	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.3.3	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.4.1															
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – End mill

Index	Type long		54 078 ...															
			Ø DC (mm) =															
			6			8			10			12			16			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	120	1xDC	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038	0,089	0,071	0,045	0,110	0,088	0,055	
P.1.2	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.1.3	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.1.4	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.1.5	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.1	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.2	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.3	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.4	95	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.3.1	95	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.3.2	95	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.3.3																		
P.4.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.4.2	60	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
M.1.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
M.2.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
M.3.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
K.1.1	130	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
K.1.2	120	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
K.2.1	130	1xDC	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	
K.2.2	120	1xDC	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	
K.3.1	130	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
K.3.2	130	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

At an a_e of < 0.3xDC, an a_p of 3xDC may be used.

Index	54 078 ... Ø DC (mm) = 20 a_e 0,1–0,2 x DC f_z (mm)	a_e 0,3–0,4 x DC f_z (mm)	a_e 0,6–1,0 x DC f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,123	0,098	0,062	●	●	○
P.1.2	0,111	0,089	0,056	●	●	○
P.1.3	0,111	0,089	0,056	●	●	○
P.1.4	0,111	0,089	0,056	●	●	○
P.1.5	0,111	0,089	0,056	●	●	○
P.2.1	0,111	0,089	0,056	●	●	○
P.2.2	0,111	0,089	0,056	●	●	○
P.2.3	0,111	0,089	0,056	●	●	○
P.2.4	0,111	0,089	0,056	●	●	○
P.3.1	0,111	0,089	0,056	●	●	○
P.3.2	0,111	0,089	0,056	●	●	○
P.3.3						
P.4.1	0,111	0,089	0,056	●		
P.4.2	0,111	0,089	0,056	●		
M.1.1	0,111	0,089	0,056	●		
M.2.1	0,111	0,089	0,056	●		
M.3.1	0,111	0,089	0,056	●		
K.1.1	0,200	0,160	0,100		●	●
K.1.2	0,200	0,160	0,100		●	●
K.2.1	0,139	0,111	0,070		●	●
K.2.2	0,139	0,111	0,070		●	●
K.3.1	0,200	0,160	0,100		●	●
K.3.2	0,200	0,160	0,100		●	●
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – End mill

Index	Type extra long		54 070 ..., 54 071 ..., 54 072 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	120	0,8	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	
P.1.2	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.3	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.4	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.5	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.1	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.2	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.3	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.4	95	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.3.1	95	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.3.2	95	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.3.3																		
P.4.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.4.2	60	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
M.1.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
M.2.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
M.3.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
K.1.1	130	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.1.2	120	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.2.1	130	0,8	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.2.2	120	0,8	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.3.1	130	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.3.2	130	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	54 070 ..., 54 071 ..., 54 072 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,075	0,060	0,038	0,089	0,071	0,045	0,110	0,088	0,055	0,123	0,098	0,062	●	○	○
P.1.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.5	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.3															
P.4.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
P.4.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
M.1.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
M.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
M.3.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
K.1.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.1.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.2.1	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.2.2	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.3.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.3.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1															
N.3.2															
N.3.3															
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – Finish milling cutter

Index	Type long	Type extra long	Type long / extra long	54 075 ..., 54 076 ...						● 1st choice ○ suitable		
				Ø DC (mm) =								
				6	8	10	12	16	20			
				a_e 0,05 x DC								
	v_c (m/min)		$a_{p\,max}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.1	210	145	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.2	200	140	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.3	200	140	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.4	185	130	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.5	185	130	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.1	200	140	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.2	185	130	2,0	0,021	0,028	0,035	0,042	0,053	0,060	●	○	○
P.2.3	175	125	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.4	170	115	2,0	0,021	0,028	0,035	0,042	0,053	0,060	●	○	○
P.3.1	180	125	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.3.2	170	115	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.3.3	140	95	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.4.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
P.4.2	80	60	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
M.1.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
M.2.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
M.3.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
K.1.1	200	140	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
K.1.2	175	125	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
K.2.1	185	130	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
K.2.2	170	115	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
K.3.1	175	125	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
K.3.2	160	110	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	345	240	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
N.3.2	345	240	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
N.3.3	280	196	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
N.4.1												
S.1.1	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.1.2	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.2.1	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.2.2	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.2.3	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.3.1	160	110	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●		
S.3.2	100	70	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Plunging angle for ramping and helical milling = 1°

Cutting data standard values – Circular saw blades

Index	54 700 ...	
	Circular saws	
	Solid carbide Fine	
	v_c (m/min)	f_z (mm)
P.1.1	80–140	0,002–0,012
P.1.2	50–80	0,001–0,012
P.1.3	50–80	0,001–0,012
P.1.4	50–80	0,001–0,012
P.1.5	50–80	0,001–0,012
P.2.1	50–80	0,001–0,012
P.2.2	50–80	0,001–0,012
P.2.3	50–80	0,001–0,012
P.2.4	50–80	0,001–0,012
P.3.1	50–80	0,001–0,012
P.3.2	50–80	0,001–0,012
P.3.3	50–80	0,001–0,012
P.4.1	80–120	0,001–0,012
P.4.2	50–80	0,001–0,012
M.1.1	50–80	0,001–0,012
M.2.1	50–80	0,001–0,012
M.3.1	50–80	0,001–0,012
K.1.1	80–140	0,002–0,012
K.1.2	50–80	0,001–0,010
K.2.1	50–80	0,001–0,010
K.2.2	50–80	0,001–0,010
K.3.1	50–80	0,001–0,010
K.3.2	50–80	0,001–0,010
N.1.1	200–500	0,003–0,012
N.1.2	200–500	0,003–0,012
N.2.1	200–450	0,003–0,012
N.2.2	200–450	0,003–0,012
N.2.3	200–450	0,003–0,012
N.3.1	200–450	0,003–0,012
N.3.2	200–450	0,003–0,012
N.3.3	200–450	0,003–0,012
N.4.1		
S.1.1	20–30	0,001–0,012
S.1.2	20–30	0,001–0,012
S.2.1	20–30	0,001–0,012
S.2.2	20–30	0,001–0,012
S.2.3	20–30	0,001–0,012
S.3.1	30–70	0,001–0,012
S.3.2	30–70	0,001–0,012
S.3.3	30–70	0,001–0,012
H.1.1		
H.1.2		
H.1.3		
H.1.4		
H.2.1		
H.3.1		
O.1.1	130–200	0,003–0,015
O.1.2	130–200	0,003–0,015
O.2.1		
O.2.2		
O.3.1		

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting data standard values – NTR roughing-finishing milling cutter

Index	a_s 0,1–0,4 x DC	a_s 0,6–1,0 x DC	$a_{p\,max}$ in mm	52 318 ...															
				Ø DC (mm) =															
				6			8			10			12			14			
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			f_z (mm)															
P.1.1	250	140	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.1.2	250	140	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.1.3	205	115	1xDC	0,069	0,044	0,026	0,089	0,056	0,033	0,106	0,067	0,040	0,122	0,077	0,046	0,135	0,086	0,051	
P.1.4	205	115	1xDC	0,069	0,044	0,026	0,089	0,056	0,033	0,106	0,067	0,040	0,122	0,077	0,046	0,135	0,086	0,051	
P.1.5	205	115	1xDC	0,069	0,044	0,026	0,089	0,056	0,033	0,106	0,067	0,040	0,122	0,077	0,046	0,135	0,086	0,051	
P.2.1	225	125	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.2.2	225	125	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.2.3	135	75	1xDC	0,068	0,043	0,025	0,087	0,055	0,033	0,104	0,066	0,039	0,120	0,076	0,045	0,133	0,085	0,055	
P.2.4	135	75	1xDC	0,068	0,043	0,025	0,087	0,055	0,033	0,104	0,066	0,039	0,120	0,076	0,045	0,133	0,085	0,050	
P.3.1	145	85	1xDC	0,072	0,045	0,027	0,092	0,058	0,034	0,110	0,070	0,041	0,127	0,080	0,047	0,141	0,089	0,053	
P.3.2	125	70	1xDC	0,064	0,041	0,024	0,082	0,052	0,031	0,099	0,062	0,037	0,113	0,072	0,042	0,126	0,080	0,047	
P.3.3	125	70	1xDC	0,064	0,041	0,024	0,082	0,052	0,031	0,099	0,062	0,037	0,113	0,072	0,042	0,126	0,080	0,047	
P.4.1	100	55	1xDC	0,050	0,031	0,018	0,063	0,040	0,024	0,076	0,048	0,028	0,087	0,055	0,033	0,097	0,061	0,037	
P.4.2	100	55	1xDC	0,050	0,031	0,018	0,063	0,040	0,024	0,076	0,048	0,028	0,087	0,055	0,033	0,097	0,061	0,037	
M.1.1	75	40	1xDC	0,043	0,027	0,016	0,055	0,035	0,021	0,066	0,042	0,025	0,076	0,048	0,028	0,084	0,054	0,032	
M.2.1	85	40	1xDC	0,047	0,030	0,018	0,060	0,038	0,022	0,072	0,046	0,027	0,083	0,052	0,031	0,092	0,058	0,035	
M.3.1	70	35	1xDC	0,036	0,023	0,013	0,046	0,029	0,017	0,055	0,035	0,021	0,063	0,040	0,024	0,070	0,045	0,027	
K.1.1	310	150	1xDC	0,124	0,078	0,046	0,158	0,100	0,059	0,190	0,120	0,071	0,218	0,138	0,081	0,242	0,154	0,090	
K.1.2	260	100	1xDC	0,100	0,060	0,026	0,138	0,080	0,039	0,160	0,100	0,051	0,188	0,120	0,061	0,212	0,135	0,070	
K.2.1	285	140	1xDC	0,105	0,067	0,039	0,135	0,085	0,050	0,161	0,102	0,060	0,185	0,117	0,069	0,205	0,130	0,077	
K.2.2	130	65	1xDC	0,050	0,031	0,018	0,063	0,040	0,024	0,076	0,048	0,028	0,087	0,055	0,033	0,097	0,061	0,037	
K.3.1	205	100	1xDC	0,087	0,055	0,032	0,111	0,070	0,041	0,133	0,084	0,050	0,153	0,097	0,057	0,170	0,108	0,064	
K.3.2	195	95	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
N.1.1	825	535	1xDC	0,092	0,066	0,047	0,117	0,084	0,060	0,140	0,101	0,072	0,161	0,116	0,083	0,179	0,129	0,092	
N.1.2	825	535	1xDC	0,092	0,066	0,047	0,117	0,084	0,060	0,140	0,101	0,072	0,161	0,116	0,083	0,179	0,129	0,092	
N.2.1	550	355	1xDC	0,096	0,069	0,049	0,123	0,088	0,063	0,147	0,106	0,076	0,169	0,122	0,087	0,188	0,136	0,097	
N.2.2	440	285	1xDC	0,101	0,073	0,052	0,129	0,093	0,066	0,154	0,111	0,079	0,178	0,128	0,091	0,198	0,142	0,101	
N.2.3	315	205	1xDC	0,110	0,079	0,057	0,141	0,101	0,072	0,168	0,121	0,087	0,194	0,139	0,099	0,216	0,155	0,110	
N.3.1	395	255	1xDC	0,046	0,033	0,024	0,059	0,042	0,030	0,070	0,050	0,036	0,081	0,058	0,041	0,090	0,065	0,046	
N.3.2	315	205	1xDC	0,073	0,053	0,038	0,094	0,067	0,048	0,112	0,081	0,058	0,129	0,093	0,066	0,144	0,103	0,074	
N.3.3	235	155	1xDC	0,073	0,053	0,038	0,094	0,067	0,048	0,112	0,081	0,058	0,129	0,093	0,066	0,144	0,103	0,074	
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Index	52 318 ...									● 1st choice ○ suitable		
	Ø DC (mm) =											
	16			18			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)											
P.1.1	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.1.2	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.1.3	0,149	0,094	0,056	0,160	0,101	0,060	0,171	0,108	0,064	●	○	○
P.1.4	0,149	0,094	0,056	0,160	0,101	0,060	0,171	0,108	0,064	●	○	○
P.1.5	0,149	0,094	0,056	0,160	0,101	0,060	0,171	0,108	0,064	●	○	○
P.2.1	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.2.2	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.2.3	0,147	0,093	0,055	0,157	0,100	0,059	0,168	0,106	0,062	●	○	○
P.2.4	0,147	0,093	0,055	0,157	0,100	0,059	0,168	0,106	0,062	●	○	○
P.3.1	0,155	0,098	0,058	0,166	0,105	0,062	0,177	0,112	0,066	●	○	○
P.3.2	0,139	0,088	0,052	0,148	0,094	0,056	0,158	0,100	0,059	●	○	○
P.3.3	0,139	0,088	0,052	0,148	0,094	0,056	0,158	0,100	0,059	●	○	○
P.4.1	0,107	0,067	0,040	0,114	0,072	0,043	0,122	0,077	0,045	●	○	○
P.4.2	0,107	0,067	0,040	0,114	0,072	0,043	0,122	0,077	0,045	●	○	○
M.1.1	0,093	0,059	0,035	0,100	0,063	0,038	0,107	0,067	0,040	●	○	○
M.2.1	0,101	0,064	0,038	0,108	0,069	0,041	0,116	0,073	0,043	●	○	○
M.3.1	0,077	0,049	0,029	0,082	0,053	0,031	0,088	0,056	0,033	●	○	○
K.1.1	0,266	0,169	0,099	0,286	0,181	0,107	0,305	0,193	0,114	●	○	○
K.1.2	0,236	0,149	0,079	0,256	0,161	0,087	0,275	0,173	0,094	●	○	○
K.2.1	0,226	0,143	0,084	0,243	0,154	0,091	0,259	0,164	0,097	●	○	○
K.2.2	0,107	0,067	0,040	0,115	0,072	0,043	0,122	0,077	0,045	●	○	○
K.3.1	0,187	0,118	0,070	0,200	0,127	0,075	0,213	0,135	0,080	●	○	○
K.3.2	0,160	0,101	0,060	0,172	0,109	0,064	0,183	0,116	0,068	●	○	○
N.1.1	0,197	0,142	0,101	0,211	0,152	0,109	0,225	0,162	0,116	●	○	○
N.1.2	0,197	0,142	0,101	0,211	0,152	0,109	0,225	0,162	0,116	●	○	○
N.2.1	0,207	0,149	0,106	0,222	0,160	0,114	0,237	0,170	0,122	●	○	○
N.2.2	0,217	0,156	0,111	0,233	0,167	0,119	0,248	0,178	0,127	●	○	○
N.2.3	0,237	0,170	0,121	0,254	0,182	0,130	0,270	0,194	0,139	●	○	○
N.3.1	0,099	0,071	0,051	0,106	0,076	0,055	0,113	0,081	0,058	●	○	○
N.3.2	0,158	0,113	0,081	0,169	0,122	0,087	0,180	0,130	0,093	●	○	○
N.3.3	0,158	0,113	0,081	0,169	0,122	0,087	0,180	0,130	0,093	●	○	○
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – Rough milling cutter

Index	Type long		54 077 ...															
			Ø DC (mm) =															
			4			5			6			8			10			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	185	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.2	175	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.3	175	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.4	170	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.5	170	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.2.1	175	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.2.2	170	1,0	0,034	0,027	0,017	0,044	0,035	0,022	0,054	0,043	0,027	0,072	0,058	0,036	0,090	0,072	0,045	
P.2.3	160	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.2.4	150	1,0	0,034	0,027	0,017	0,044	0,035	0,022	0,054	0,043	0,027	0,072	0,058	0,036	0,090	0,072	0,045	
P.3.1	160	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.3.2	150	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.3.3	130	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.4.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
P.4.2	70	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
M.1.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
M.2.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
M.3.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
K.1.1	175	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
K.1.2	160	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
K.2.1	170	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
K.2.2	155	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
K.3.1	160	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
K.3.2	145	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	280	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
N.3.2	280	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
N.3.3	225	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
N.4.1																		
S.1.1	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.1.2	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.2.1	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.2.2	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.2.3	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.3.1	70	1,0	0,034	0,027	0,017	0,044	0,035	0,022	0,054	0,043	0,027	0,072	0,058	0,036	0,090	0,072	0,045	
S.3.2	40	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	54 077 ... Ø DC (mm) = 12			16			20			● 1st choice ○ suitable		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)											
P.1.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.3	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.4	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.5	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.2.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.2.2	0,108	0,086	0,054	0,135	0,108	0,068	0,153	0,122	0,077	●	○	○
P.2.3	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.2.4	0,108	0,086	0,054	0,135	0,108	0,068	0,153	0,122	0,077	●	○	○
P.3.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.3.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.3.3	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.4.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
P.4.2	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
M.1.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
M.2.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
M.3.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
K.1.1	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●	○	○
K.1.2	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●	○	○
K.2.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
K.2.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
K.3.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
K.3.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●		
N.3.2	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●		
N.3.3	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●		
N.4.1												
S.1.1	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.1.2	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.2.1	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.2.2	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.2.3	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.3.1	0,108	0,086	0,054	0,135	0,108	0,068	0,153	0,122	0,077	●		
S.3.2	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – Rough milling cutter

Index	Full slot milling v_c (m/min)	Contour milling v_c (m/min)	52 338 ..., 52 339 ..., 52 340 ..., 52 341 ..., 52 342 ..., 52 343 ... Ti1000 Ø DC (mm) = 6 f_z (mm)		8 f_z (mm)		10 f_z (mm)		12 f_z (mm)		14 f_z (mm)	
P.1.1	170	190	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.2	160	180	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.3	150	170	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.4	150	170	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.5	130	150	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.1	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.2	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.3	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.4	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.3.1	160	180	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.3.2	90	110	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.3.3	90	110	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.4.1	55	65	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
P.4.2	35	45	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
M.1.1	60	70	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
M.2.1	45	55	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
M.3.1	50	60	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
K.1.1	120	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.1.2	110	120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.2.1	110	120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.2.2	90	100	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.3.1	110	120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.3.2	100	110	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

For **Full slot milling** the values indicated in the table are based on:
a_e = 1,0 x DC / a_p = 1,0 x DC

For **Contour milling** the values indicated in the table are based on:
a_e = 0,4 x DC / a_p = 1,0 x DC

Index	52 338 ..., 52 339 ..., 52 340 ..., 52 341 ..., 52 342 ..., 52 343 ...								● 1st choice ○ suitable		
	Ti1000										
	Ø DC (mm) =										
	16		18		20		25				
	f_z (mm)										
									Emulsion	Compressed air	MMS
P.1.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.3	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.4	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.5	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.3	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.4	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.3.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.3.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.3.3	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.4.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
P.4.2	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
M.1.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
M.2.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
M.3.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
K.1.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.1.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.2.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.2.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.3.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.3.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

With tools with internal cooling (52 338…/52 339…) the cutting speed (v_c) can be increased by 20–30 %!

Cutting data standard values – Ball-nosed end mill

Index	Type short		54 073 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC
			f_z (mm)															
P.1.1	180	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.2	160	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.3	160	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.4	150	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.5	150	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.1	170	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.2	140	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.3	140	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.4	130	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	100	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
P.4.2	40	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.1.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.2.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.3.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
K.1.1	120	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.1.2	80	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.2.1	120	0,08	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.2.2	200	0,08	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.3.1	120	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.3.2	100	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	200	0,08	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.3.2	200	0,08	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.3.3	140	0,08	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.4.1																		
S.1.1	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.1.2	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.1	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.2	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.3	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.3.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.3.2	20	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	54 073 ... Ø DC (mm) = 10			12			16			20			● 1st choice ○ suitable		
	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.5	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.1															
P.3.2															
P.3.3															
P.4.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
P.4.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.3.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
K.1.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.1.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.2.1	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.2.2	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.3.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.3.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.2	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.3	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.4.1															
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – Ball-nosed end mill

Index	Type short / long		54 074 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC
			f_z (mm)															
P.1.1	130	0,08xD	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	
P.1.2	110	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.3	110	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.4	95	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.5	95	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.1	110	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.2	85	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.3	85	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.4	65	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	60	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
P.4.2	50	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.1.1	50	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.2.1	60	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.3.1	60	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
K.1.1	155	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.1.2	145	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.2.1	155	0,08xD	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.2.2	145	0,08xD	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.3.1	155	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.3.2	145	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	240	0,08xD	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.3.2	240	0,08xD	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.3.3	170	0,08xD	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	54 074 ... Ø DC (mm) = 10			12			16			20			● 1st choice ○ suitable		
	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,075	0,060	0,038	0,089	0,071	0,045	0,110	0,088	0,055	0,123	0,098	0,062	●	○	○
P.1.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.5	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.1															
P.3.2															
P.3.3															
P.4.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
P.4.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.3.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
K.1.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.1.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.2.1	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.2.2	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.3.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.3.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.2	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.3	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting Speeds – Depending upon Coating

Index	uncoated		Ti400		● 1st choice ○ suitable			Ti1000 / DPX72S		● 1st choice ○ suitable		
					Emulsion	Compressed air	MMS			Emulsion	Compressed air	MMS
	v_c (m/min)		v_c (m/min)					v_c (m/min)				
P.1.1	90–110	130–160	90–130	140–200	●	○	○	150–170	220–240	○	●	○
P.1.2	80–100	120–140	90–110	100–160	●	○	○	130–150	180–220	○	●	○
P.1.3	80–100	120–140	90–110	100–160	●	○	○	130–150	180–220	○	●	○
P.1.4	50–60	70–90	60–70	80–110	●	○	○	70–100	100–140	○	●	○
P.1.5	50–60	70–90	60–70	80–110	●	○	○	70–100	100–140	○	●	○
P.2.1	70–90	100–130	80–100	140–160	●	○	○	120–140	170–200	○	●	○
P.2.2	70–90	100–130	80–100	100–150	●	○	○	120–140	170–200	○	●	○
P.2.3	40–60	60–80	50–70	70–100	●	○	○	60–80	90–120	○	●	○
P.2.4	40–60	60–80	50–70	70–100	●	○	○	60–80	90–120	○	●	○
P.3.1	50–60	70–90	60–80	70–110	●	○	○	70–100	100–140	○	●	○
P.3.2	30–50	40–70	40–60	70–100	●	○	○	60–80	80–120	○	●	○
P.3.3	25–40	40–60	40–60	70–100	●	○	○	50–80	70–110	○	●	○
P.4.1	40–50	60–70	40–50	60–80	●	○	○	60–80	90–120	●		○
P.4.2	40–50	60–70	40–50	60–80	●	○	○	60–80	90–120	●		○
M.1.1	40–50	60–70	50–60	80–110	●	○	○	70–80	100–120	●		○
M.2.1	20–30	30–40	25–35	40–70	●	○	○	40–60	60–80	●		○
M.3.1	30–40	40–50	40–50	70–100	●	○	○	50–70	80–100	●		○
K.1.1	60–80	90–120	70–90	100–130	●	○	○	100–110	140–160	○	●	○
K.1.2	60–70	80–100	60–80	90–120	●	○	○	80–100	120–140	○	●	○
K.2.1	60–70	80–100	70–90	100–130	●	○	○	80–100	120–140	○	●	○
K.2.2	50–60	70–90	60–80	90–120	●	○	○	70–80	100–120	○	●	○
K.3.1	60–80	90–120	60–80	90–120	●	○	○	100–110	140–160	○	●	○
K.3.2	50–60	70–90	60–80	90–120	●	○	○	70–80	100–120	○	●	○
N.1.1	<300	<400	280–320	250–350	●	○	○	180–350	250–500	●		○
N.1.2	<300	<400	280–320	220–320	●	○	○	180–350	250–500	●		○
N.2.1	130–180	200–250	220–270	200–300	●	○	○	140–200	200–300	●		○
N.2.2	100–120	140–170	170–200	200–250	●	○	○	110–130	160–180	●		○
N.2.3	40–60	60–80	120–180	150–200	●	○	○	50–70	80–100	●		○
N.3.1	160–200	230–280	100–130	120–200	●	○	○	180–210	250–300	●	○	○
N.3.2	150–180	210–260	100–130	120–180	●	○	○	180–210	250–300	●		○
N.3.3	150–180	210–260	100–130	120–180	●	○	○	180–210	250–300	●		○
N.4.1	150–180	220–260	170–200	170–250		●	○	180–210	250–300		●	○
S.1.1			25–35	30–50	●	○	○	30–40	40–60	●	○	○
S.1.2			25–35	30–50	●	○	○	30–40	40–60	●	○	○
S.2.1	15–25	20–35	40–60	50–80	●	○	○	35–50	50–70	●	○	○
S.2.2			30–40	40–60	●	○	○	30–40	40–60	●	○	○
S.2.3												
S.3.1	30–50	40–70	40–50	70–100	●	○	○	50–70	80–100	●	○	○
S.3.2	30–40	40–50	50–60	80–120	●	○	○	50–60	70–90	●	○	○
S.3.3			30–40	40–60	●	○	○	20–30	30–40	●	○	○
H.1.1								60–70	80–100		●	○
H.1.2								40–60	60–80		●	○
H.1.3								30–40	40–60		●	○
H.1.4								20–30	30–40		●	○
H.2.1								70–80	100–120		●	○
H.3.1								60–70	80–100		●	○
O.1.1	50–70	70–100	120–180	150–220	●	○	○	60–80	80–120	○	●	○
O.1.2	40–60	60–90	70–90	90–120	●	○	○	40–70	60–100	○	●	○
O.2.1	30–50	40–70	50–70	70–110	●	○	○	40–60	60–80	○	●	○
O.2.2	30–50	40–70	50–70	70–110	●	○	○	40–60	60–80	○	●	○
O.3.1	70–100	100–140	100–120	130–180		●	○	80–120	120–180		●	○

Index	Ti1001		● 1st choice ○ suitable			Ti10 / Ti20		● 1st choice ○ suitable		
	v_c (m/min)		Emulsion	Compressed air	MMS	v_c (m/min)		Emulsion	Compressed air	MMS
P.1.1										
P.1.2										
P.1.3										
P.1.4										
P.1.5										
P.2.1										
P.2.2										
P.2.3										
P.2.4										
P.3.1										
P.3.2										
P.3.3										
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1										
K.1.2										
K.2.1										
K.2.2										
K.3.1										
K.3.2										
N.1.1	300–400	300–500	●		○	150–350	250–500	●		○
N.1.2	300–400	300–500	●		○	120–220	150–300	●		○
N.2.1	250–300	300–450	●		○	150–180	220–250	●		○
N.2.2	200–250	250–350	●		○	100–130	150–180	●		○
N.2.3	150–200	200–250	●		○					○
N.3.1						170–180	240–260	●		○
N.3.2	220–280	250–330	●		○	120–150	170–220	●		○
N.3.3	220–280	250–330	●		○	120–150	170–220	●		○
N.4.1						140–170	200–250		●	
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1							80–100	●		○
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1						220–280	300–400	●		○
O.1.2						140–170	200–240	●		○
O.2.1						70–100	100–140	●		○
O.2.2						70–100	100–140	●		○
O.3.1										

Depths of Cut Reference Values – Milling Cutters – extra short – long

Index	$a_{p\,max.}$ x DC		Ø DC (mm) = 2,5			3,0			$a_{p\,max.}$ x DC		Ø DC (mm) = 4,0			5,0			6,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)								f_z (mm)								
P.1.1	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,041	0,027	0,020	0,054	0,035	0,026
P.1.2	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.1.3	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.1.4	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.1.5	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.2.1	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.2.2	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
P.2.3	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
P.2.4	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
P.3.1	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.3.2	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.3.3	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.4.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
P.4.2	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
M.1.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
M.2.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
M.3.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
K.1.1	1,0	0,5	0,020	0,013	0,010	0,029	0,019	0,014	1,5	1,0	0,039	0,026	0,019	0,052	0,034	0,025	0,064	0,042	0,031
K.1.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.2.1	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.2.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.3.1	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.3.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
N.1.1	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.1.2	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.2.1	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.2.2	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.2.3	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.3.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,0	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
N.3.2	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,0	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
N.3.3	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,0	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
N.4.1	1,0	0,5	0,026	0,017	0,012	0,038	0,025	0,018	1,5	1,0	0,051	0,033	0,025	0,067	0,044	0,033	0,083	0,054	0,040
S.1.1	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
S.1.2	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
S.2.1	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1,0	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
S.2.2	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
S.2.3	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1,0	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
S.3.1	0,7	0,3	0,017	0,011	0,008	0,024	0,016	0,012	1,0	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
S.3.2	0,7	0,3	0,018	0,012	0,009	0,026	0,017	0,013	1,0	1,0	0,035	0,023	0,017	0,046	0,030	0,023	0,058	0,038	0,028
S.3.3	0,7	0,3	0,018	0,012	0,009	0,026	0,017	0,013	1,0	1,0	0,035	0,023	0,017	0,046	0,030	0,023	0,058	0,038	0,028
H.1.1	0,5*		0,019**			0,027**			1,0		0,037**			0,049**			0,061**		
H.1.2	0,5*		0,017**			0,025**			1,0		0,034**			0,045**			0,056**		
H.1.3	0,5*		0,015**			0,022**			1,0		0,030**			0,040**			0,050**		
H.1.4	0,5*		0,013**			0,020**			1,0		0,026**			0,035**			0,043**		
H.2.1	0,5*		0,021**			0,030**			1,0		0,041**			0,054**			0,067**		
H.3.1	0,5*		0,019**			0,027**			1,0		0,037**			0,049**			0,061**		
O.1.1	1,0	0,5	0,044	0,029	0,021	0,064	0,042	0,031	1,5	1,0	0,086	0,057	0,042	0,114	0,074	0,055	0,141	0,092	0,068
O.1.2	1,0	0,5	0,040	0,026	0,019	0,058	0,038	0,028	1,5	1,1	0,078	0,051	0,038	0,103	0,068	0,050	0,128	0,084	0,062
O.2.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,2	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
O.2.2	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,3	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
O.3.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,4	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030

* = Trimming and trochoidal slot milling

** = With an a_e = 0.1xDC

Depths of cut reference values – Finish milling, extra short – long

$a_{p\,max.}$ x DC		Ø DC (mm) = 2,5			3,0			$a_{p\,max.}$ x DC		Ø DC (mm) = 4,0			5,0			6,0		
										a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm		
		f_z (mm)								f_z (mm)								
0,7								1,5		0,080***			0,090***			0,100***		

*** = To improve the surface quality reduce the f_z

Cutting data for Micro-Mini cutters for milling with diameter < 2.5 mm → v_c/f_z Page 432–439

Index	Ø DC (mm) = 8,0			10,0			12,0			14,0			16,0			18,0			20,0–25,0		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	f_z (mm)																				
P.1.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.3	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.4	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.5	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.2.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.2.2	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
P.2.3	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
P.2.4	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
P.3.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.3.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.3.3	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.4.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
P.4.2	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
M.1.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
M.2.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
M.3.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
K.1.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,060	0,140	0,080	0,060	0,160	0,100	0,070	0,170	0,110	0,080	0,200	0,130	0,08
K.1.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.2.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.2.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.3.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.3.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
N.1.1	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.1.2	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.2.1	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.2.2	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.2.3	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.3.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
N.3.2	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
N.3.3	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
N.4.1	0,110	0,070	0,050	0,130	0,090	0,070	0,150	0,100	0,070	0,180	0,110	0,080	0,210	0,130	0,090	0,230	0,150	0,100	0,250	0,170	0,11
S.1.1	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
S.1.2	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
S.2.1	0,060	0,040	0,030	0,080	0,050	0,040	0,090	0,060	0,040	0,110	0,060	0,050	0,120	0,080	0,050	0,130	0,090	0,060	0,150	0,100	0,06
S.2.2	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
S.2.3	0,060	0,040	0,030	0,080	0,050	0,040	0,090	0,060	0,040	0,110	0,060	0,050	0,120	0,080	0,050	0,130	0,090	0,060	0,150	0,100	0,06
S.3.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
S.3.2	0,070	0,050	0,040	0,090	0,060	0,050	0,100	0,070	0,050	0,130	0,070	0,050	0,140	0,090	0,060	0,160	0,100	0,070	0,180	0,120	0,08
S.3.3	0,070	0,050	0,040	0,090	0,060	0,050	0,100	0,070	0,050	0,130	0,070	0,050	0,140	0,090	0,060	0,160	0,100	0,070	0,180	0,120	0,08
H.1.1	0,080**			0,100**			0,110**			0,120**			0,130**			0,150**			0,170**		
H.1.2	0,070**			0,090**			0,100**			0,110**			0,120**			0,140**			0,150**		
H.1.3	0,060**			0,080**			0,090**			0,100**			0,110**			0,120**			0,130**		
H.1.4	0,060**			0,070**			0,080**			0,080**			0,100**			0,110**			0,120**		
H.2.1	0,090**			0,110**			0,120**			0,130**			0,150**			0,160**			0,180**		
H.3.1	0,080**			0,100**			0,110**			0,120**			0,130**			0,150**			0,170**		
O.1.1	0,180	0,120	0,090	0,230	0,150	0,110	0,250	0,160	0,120	0,310	0,180	0,130	0,350	0,230	0,150	0,380	0,250	0,170	0,430	0,280	0,19
O.1.2	0,170	0,110	0,080	0,210	0,140	0,100	0,230	0,150	0,110	0,280	0,160	0,120	0,320	0,210	0,140	0,350	0,230	0,150	0,390	0,260	0,17
O.2.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
O.2.2	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
O.3.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08

Ø DC (mm) = 8,0	10,0	12,0	14,0	16,0	18,0	20,0–25,0
a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm
f_z (mm)						
0,110***	0,130***	0,150***	0,170***	0,190***	0,210***	0,230***

Plunging angle for ramping and helical milling: 3°

Feed rate guide values for ball nosed and torus cutters on → **Page 486**

14

Depths of Cut Reference Values – Milling Cutters – extra long

Index	$a_{p\,max.}$ x DC	Ø DC (mm) = 2,5		3,0		$a_{p\,max.}$ x DC	Ø DC (mm) = 4,0		5,0		6,0		8,0		10,0		12,0	
		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
		f_z (mm)					f_z (mm)											
P.1.1	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,052	0,034	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.2	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.3	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.4	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.5	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.2.1	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.2.2	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
P.2.3	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
P.2.4	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
P.3.1	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.3.2	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.3.3	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.4.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
P.4.2	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
M.1.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
M.2.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
M.3.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
K.1.1	0,6	0,015	0,010	0,029	0,019	1,0	0,039	0,025	0,048	0,032	0,058	0,038	0,080	0,050	0,100	0,060	0,110	0,070
K.1.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.2.1	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.2.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.3.1	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.3.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
N.1.1	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.1.2	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.2.1	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.2.2	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.2.3	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.3.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
N.3.2	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
N.3.3	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
N.4.1	0,6	0,020	0,013	0,038	0,025	1,0	0,050	0,033	0,063	0,041	0,076	0,049	0,100	0,070	0,130	0,080	0,140	0,090
S.1.1	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
S.1.2	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
S.2.1	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,060	0,040	0,070	0,050	0,080	0,050
S.2.2	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
S.2.3	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,060	0,040	0,070	0,050	0,080	0,050
S.3.1	0,3	0,013	0,009	0,024	0,016	0,5	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
S.3.2	0,3	0,014	0,009	0,026	0,017	0,5	0,035	0,023	0,044	0,029	0,052	0,034	0,070	0,050	0,090	0,060	0,100	0,060
S.3.3	0,3	0,014	0,009	0,026	0,017	0,5	0,035	0,023	0,044	0,029	0,052	0,034	0,070	0,050	0,090	0,060	0,100	0,060
H.1.1	0,3*	0,012**		0,022**		0,5*	0,029**		0,037**		0,044**		0,060**		0,070**		0,080**	
H.1.2	0,3*	0,011**		0,020**		0,5*	0,027**		0,034**		0,041**		0,050**		0,070**		0,080**	
H.1.3	0,3*	0,010**		0,018**		0,5*	0,024**		0,030**		0,036**		0,050**		0,060**		0,070**	
H.1.4	0,3*	0,008**		0,016**		0,5*	0,021**		0,026**		0,031**		0,040**		0,050**		0,060**	
H.2.1	0,3*	0,013**		0,024**		0,5*	0,033**		0,041**		0,049**		0,070**		0,080**		0,090**	
H.3.1	0,3*	0,012**		0,022**		0,5*	0,029**		0,037**		0,044**		0,060**		0,070**		0,080**	
O.1.1	0,6	0,034	0,022	0,064	0,042	1,0	0,085	0,056	0,107	0,070	0,128	0,084	0,170	0,110	0,210	0,140	0,230	0,150
O.1.2	0,6	0,031	0,020	0,058	0,038	1,0	0,077	0,051	0,097	0,063	0,116	0,076	0,160	0,100	0,190	0,130	0,210	0,140
O.2.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
O.2.2	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
O.3.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070

* = Trimming and trochoidal slot milling

** = With an a_e = 0.1xDC

Depths of cut reference values – Finish milling, extra long

	$a_{p\,max.}$ x DC	Ø DC (mm) = 2,5	3,0	$a_{p\,max.}$ x DC	Ø DC (mm) = 4,0	5,0	6,0	8,0	10,0	12,0
		a_e 0,2–0,3 mm	a_e 0,2–0,3 mm		a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm
		f_z (mm)			f_z (mm)					
	0,7			0,7	0,080***	0,090***	0,100***	0,110***	0,130***	0,150***

*** = With an a_p of 1.5 x DC multiply the f_z by 0.75

Cutting data for Micro-Mini cutters for milling with diameter < 2.5 mm → v_c/f_z Page 432–439

Index	Ø DC (mm) = 14,0		16,0		18,0		20,0–25,0	
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	f_z (mm)							
P.1.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.2	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.3	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.4	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.5	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.2.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.2.2	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
P.2.3	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
P.2.4	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
P.3.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.3.2	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.3.3	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.4.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
P.4.2	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
M.1.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
M.2.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
M.3.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
K.1.1	0,120	0,080	0,130	0,090	0,150	0,100	0,160	0,110
K.1.2	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.2.1	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.2.2	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.3.1	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.3.2	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
N.1.1	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.1.2	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.2.1	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.2.2	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.2.3	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.3.1	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
N.3.2	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
N.3.3	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
N.4.1	0,150	0,100	0,170	0,110	0,190	0,120	0,210	0,140
S.1.1	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
S.1.2	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
S.2.1	0,090	0,060	0,100	0,070	0,110	0,070	0,120	0,080
S.2.2	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
S.2.3	0,090	0,060	0,100	0,070	0,110	0,070	0,120	0,080
S.3.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
S.3.2	0,110	0,070	0,120	0,080	0,130	0,090	0,150	0,100
S.3.3	0,110	0,070	0,120	0,080	0,130	0,090	0,150	0,100
H.1.1	0,090**		0,100**		0,110**		0,120**	
H.1.2	0,080**		0,090**		0,100**		0,110**	
H.1.3	0,070**		0,080**		0,090**		0,100**	
H.1.4	0,060**		0,070**		0,080**		0,090**	
H.2.1	0,100**		0,110**		0,120**		0,140**	
H.3.1	0,090**		0,100**		0,110**		0,120**	
O.1.1	0,260	0,170	0,290	0,190	0,320	0,210	0,360	0,230
O.1.2	0,230	0,150	0,260	0,170	0,290	0,190	0,330	0,210
O.2.1	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
O.2.2	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
O.3.1	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100

	Ø DC (mm) = 14,0	16,0	18,0	20,0–25,0
	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm
	f_z (mm)			
	0,170***	0,190***	0,210***	0,230***

Plunging angle for ramping and helical milling: 3°

Feed rate guide values for ball nosed and torus cutters on → **Page 486**

14

Feedrate for machining in steel, iron and non-ferrous materials with torus and ball nosed end mills

Ball nose end milling cutters



Ball Nosed and Torus Cutters



Torus end milling cutters



Ø DC mm	f_z mm	f_z mm	f_z mm
2	0,015	0,010	0,010
3	0,030	0,020	0,015
4	0,040	0,030	0,020
5	0,060	0,050	0,030
6	0,070	0,060	0,050
8	0,100	0,080	0,070
10	0,120	0,100	0,080
12	0,150	0,120	0,100
16	0,180	0,150	0,120
18	0,200	0,180	0,140
20	0,220	0,200	0,150

The feed should be reduced by 10–20% for uncoated tools.

Feedrates for the machining of hardened materials with Ti1000 coated torus and ball nosed cutters

Ball Nosed and Torus Cutters

Hardness = 40–60 HRC

v_c = 80 -120 m/min



Ball Nosed and Torus Cutters

Hardness = 40–60 HRC

v_c = 80 -120 m/min



Ø DC mm	f_z mm	f_z mm
2	0,005	0,005
3	0,015	0,010
4	0,030	0,015
5	0,050	0,020
6	0,060	0,030
8	0,070	0,035
10	0,080	0,040
12	0,080	0,050
16	0,100	0,080

Trochoidal Milling

Due to the trochoidal milling process, large depths of cut are also possible on unstable and weak machines.

Depending on the tensile strength of the material, the radial infeed is 5–20% of the cutting edge diameter. As trochoidal milling is a plain milling process, the forces that occur are lower.

When trochoidal milling a slot, the milling cutter diameter should be a maximum of 70% of the slot width.
Example: Slot 20 mm x 70% = 14 mm
A Ø 14 mm milling cutter would be the perfect tool.

Advantages/Benefits

- ▲ Reduced tool wear
- ▲ Reduced cycle time
- ▲ Exploiting the full length of the cutting edge
- ▲ Reduced cutting pressure

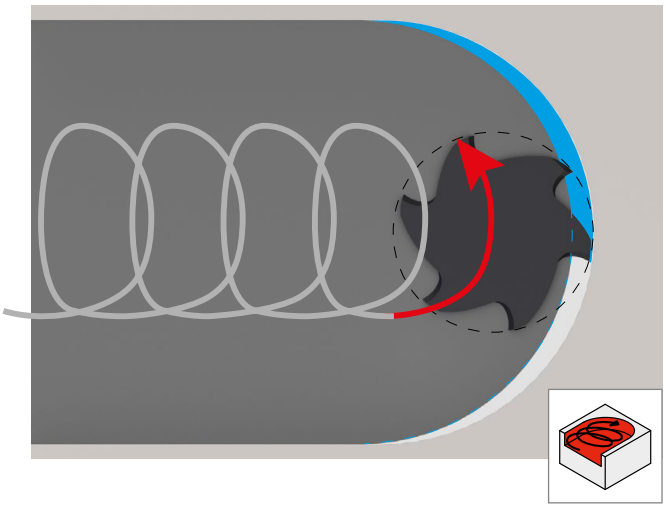

Most CAM providers offer an application for trochoidal milling.
Our recommendations for this application are as follows:

Material	Depth of Cut	Radial Infeed	Feed rate Correction Factor	v_c Correction Factor
Steel	2xDC	0,05xD	3,5	1,6
	2xDC	0,10xD	2,5	1,3
Stainless steel	2xDC	0,05xD	3,5	1,4
	2xDC	0,10xD	2,5	1,2
Cast iron	2xDC	0,05xD	3,5	1,6
	2xDC	0,10xD	2,5	1,3
Non-ferrous metals	2xDC	0,05xD	3,5	1,8
	2xDC	0,10xD	2,5	1,4
	2xDC	0,20xD	1,5	1,2
Heat-resistant	2xDC	0,05xD	2,5	1,4
	2xDC	0,10xD	2,0	1,2
Tempered steel	2xDC	0,02xD	2,5	1,5
	2xDC	0,05xD	2,0	1,3

14

Please note that the indicated values may require reducing due to the component design, machine rigidity and machine dynamics. In optimal conditions, the values can also be increased.

Technical references

Feedrate Adjustment

If the speed stated in the tables cannot be achieved by the machine spindle you are using, reduce the feed rate as a percentage of the speed.

Example:
required according to table = n 50,000 rpm and v_f 1000 mm/min,
available machine speed = 40,000 rpm

Calculation of the feed rate to be entered:
40,000 rpm / 50,000 rpm *100= corresponds to 80%
1000 mm/min * 80% = 800 mm/min

The feed rate to be entered = **800 mm/min.**

Angled ramping with solid carbide cutters

Angled ramping with solid carbide cutters is possible at an angle of 2° to 10° depending on the cutter type.
A protective edge chamfer or corner radius is an advantage.



Recommended ramping angles for solid carbide mills:

- ▲ Ramping angle with 3 or less cutting edges → 6°–10°
- ▲ Ramping angle with 4 cutting edges → 3°–6°
- ▲ Ramping angle with 5 cutting edges → 2°–3°
- ▲ Ramping angle with more than 5 cutting edges → only possible under certain conditions!

Preparation for T-slot milling cutter

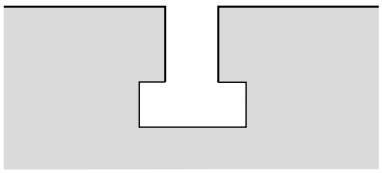

To produce a T-slot with the solid carbide T-slot milling cutter, proceed as follows:

1

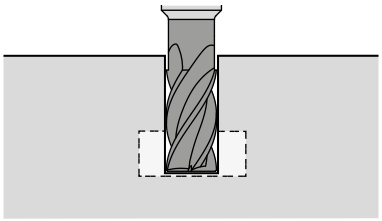

Rough-mill the slot up to approx. 0.5 mm above the bottom.
Bottom corresponds to the finished dimension of the T-slot.
The slot width should be milled to the finished dimension during this step.

2

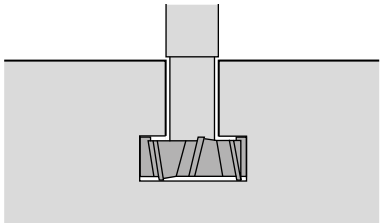

Then finish milling the slot with the T-slot milling cutter.
Reduce the feed by 50% when entering the material

General formula for calculating the cutting parameters

Designation	Abbreviation	Unit	Formula	Example	
Number of revolutions	**n**	**min^{-1}**	$n = \frac{v_C \times 1000}{DC \times \pi}$	v_C = 25 m/min DC = 20 mm	$n = \frac{25 \times 1000}{20 \times \pi}$ = 398 min^{-1}
Cutting speed	**v_c**	**m/min**	$v_c = \frac{DC \times \pi \times n}{1000}$	n = 400 min^{-1} DC = 20 mm	$v_c = \frac{20 \times \pi \times 400}{1000}$ = 25 m/min
Feed per tooth	**f_z**	**mm**	$f_z = \frac{v_f}{ZEFP \times n}$	v_f = 320 mm/min. n = 400 min^{-1} ZEFP = 4	$f_z = \frac{320}{4 \times 400}$ = 0,2 mm
Feed per revolution	**f**	**mm**	$f = f_z \times ZEFP$	f_z = 0,2 mm ZEFP = 4	f = 0,2 x 4 = 0,8 mm
Feed rate	**v_f**	**mm/min.**	$v_f = f_z \times ZEFP \times n$	f_z = 0,2 mm ZEFP = 4 n = 400 min^{-1}	v_f = 0,2 x 4 x 400 = 320 mm/min
Average chip thickness	**h_m**	**mm**	$h_m = f_z \times \sqrt{\frac{a_e}{DC}}$	f_z = 0,2 mm a_e = 0,3 mm DC = 20 mm	h_m = 0,2 x $\sqrt{\frac{0,3}{20}}$ = 0,024 mm

ZEFP = Number of flutes
a_e = cutting width

Calculation of the feed rate on the midpoint path of the milling cutter (v_{fM})

Designation	Abbreviation	Unit	Formula	Example
Internal contour	**v_{fM}**	**mm/min.**	$v_{fM} = \frac{v_f \times (D - DC)}{D}$	
Outside profile	**v_{fM}**	**mm/min.**	$v_{fM} = \frac{v_f \times (D + DC)}{D}$	
Helical ramping	**v_{fM}**	**mm/min.**	$v_{fM} = \frac{n \times f_z \times ZEFP \times (D - D_C)}{D}$	

14

Assembly instructions

Image of MultiLock cylindrical shank adapter assembly

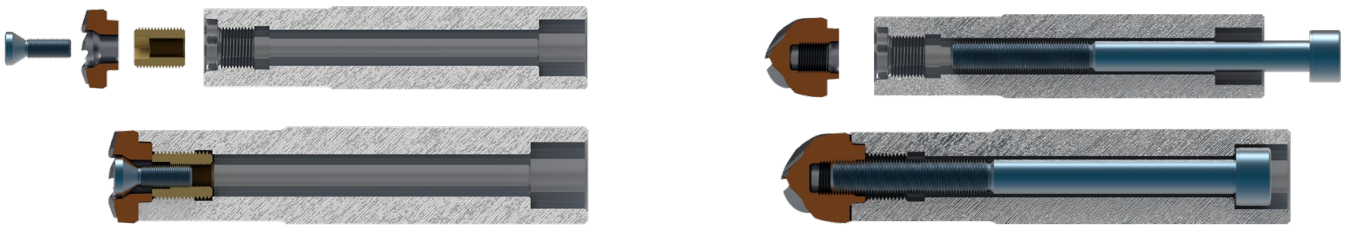

▲ The cylindrical shank adapter can be used universally. In this case, the MultiLock high-feed and torus cutters are clamped from the front using a threaded bush and clamping screw. The MultiLock radius milling and deburring cutters are clamped via the shank using a cylindrical screw.

Image of MultiLock screw-in adapter assembly

Type A

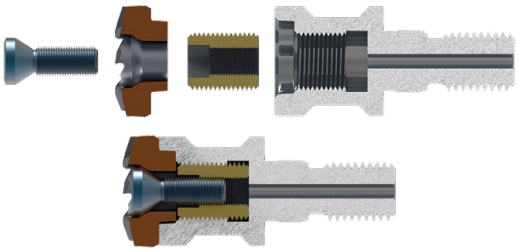

▲ The type A screw-in adapter must be used for MultiLock high-feed and torus cutters. These are clamped from the front using a threaded bush and clamping screw.

Type B

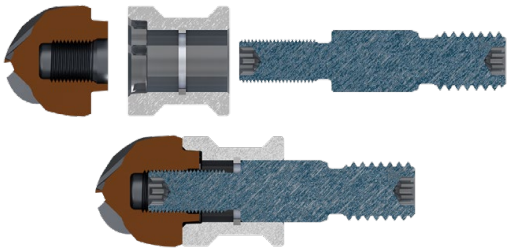

▲ The type B screw-in adapter has two parts and must be used for MultiLock radius milling and deburring cutters. These are tensioned from the rear using a clamping screw. The clamping screw is simultaneously used for screwing in the adapter.

Detailed assembly instructions are enclosed with the respective holders. You can also find this in our online shop.

Comparison – ball nose end milling cutters vs. 3D Finish

3D Finish

- Radius does not depend on the tool diameter
- High depths of cut possible owing to the large radius
- Tools with a large radius and small shank diameter are more economical as the carbide content is lower, e.g. diameter 16 mm, radius 1500 mm

Ball nose end milling cutters

- Radius depends on the tool diameter
- Only low widths of cut are possible; linked to the small radius
- Tools with a large diameter/radius are expensive due to the high carbide content, e.g. diameter 16 mm radius 8 mm

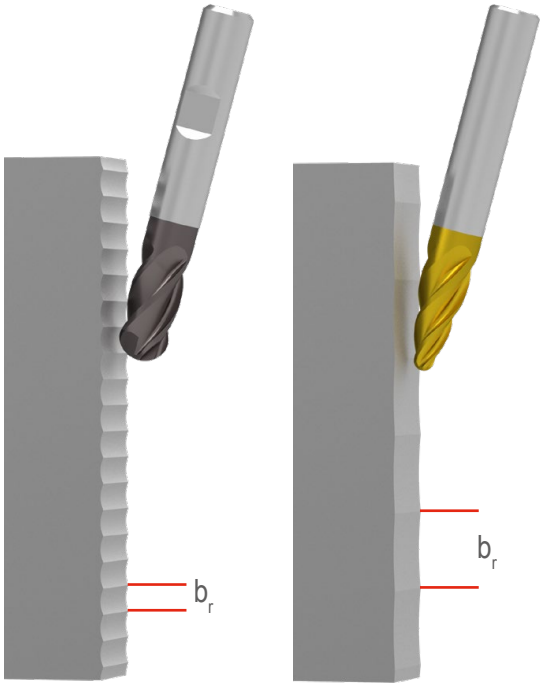

Formulae for calculations:

$$b_r = 2 \times \sqrt{R_{th} \times (r \times 2 - R_{th})}$$

$$R_{th} = r - \sqrt{\frac{(r \times 2)^2 - b_r^2}{4}}$$

$$R_a \simeq 0{,}1 \times R_{th}$$

$$R_{th} \simeq R_a / 0{,}1$$

Result

Required surface quality = R_a 0,4
$R_{th} \simeq 0{,}4 / 0{,}1 \simeq 4\ \mu m = 0{,}004$ mm

Ball nose end milling cutters
Diameter 16 mm, radius 8 mm
$b_r = 2 \times \sqrt{0{,}004 \times (8 \times 2 - 0{,}004)}$
b_r = 0,51 mm

3D Finish
Diameter 16 mm, radius 1500 mm
$b_r = 2 \times \sqrt{0{,}004 \times (1500 \times 2 - 0{,}004)}$
b_r = 6,93 mm



Key

R_{th} = Theoretical roughness
r = Radius
R_a = Average roughness
b_r = Step down

Application information

3D Finish – barrel shape

- Suitable for easily accessible areas

3D Finish – oval shape

- Suitable for easily accessible flanks
- Not suitable for deep areas

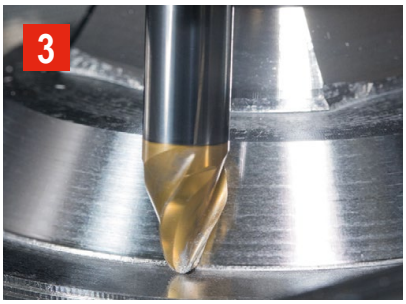

3D Finish – taper shape

- Suitable for steep walls and deep cavities
- α/2 is the angle to the surface to be used
- If the surface exhibits a tilt angle of α/2, the surface can also be machined on three axes



3D Finish – taper shape

- Suitable for flat areas
- α/2 is the angle to the surface to be used
- If the surface exhibits a tilt angle of α/2, the surface can also be machined on three axes



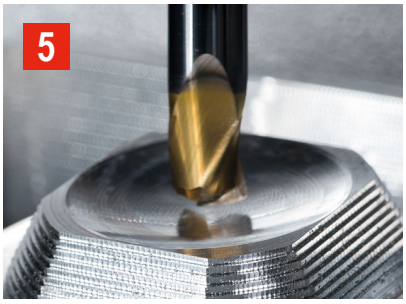

3D Finish – lens shape

- Suitable for flat areas

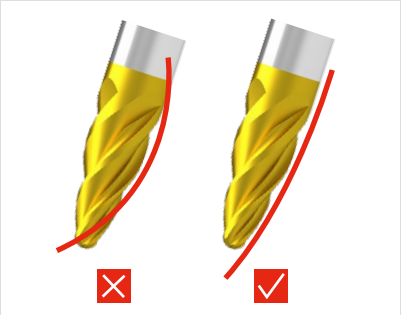

Please note:

Note that the curvature of the component should be greater than the curvature of the tool.

Check whether your programming system supports the tool geometry of the 3D Finish and can work with it.

Differences between the milling cutter types

Designation	Type	Shape of the chip breaker	Application description	Chip shape
Rough and finish milling cutters	WF NF HF		▲ High chip volume, even on less powerful machines ▲ Surface quality mostly sufficient ▲ Lower cutting pressure compared to smooth-edged milling cutters ▲ Finish machining not needed	
Rough milling cutters	WR NR HR		▲ Produces very small and short chips ▲ Problem-solver in unstable conditions ▲ High chip volume, even on the weakest machines ▲ Exceptionally well suited to full slot milling ▲ Additional finish machining needed ▲ High feeds possible	

Temperature scale for chips when dry machining steel

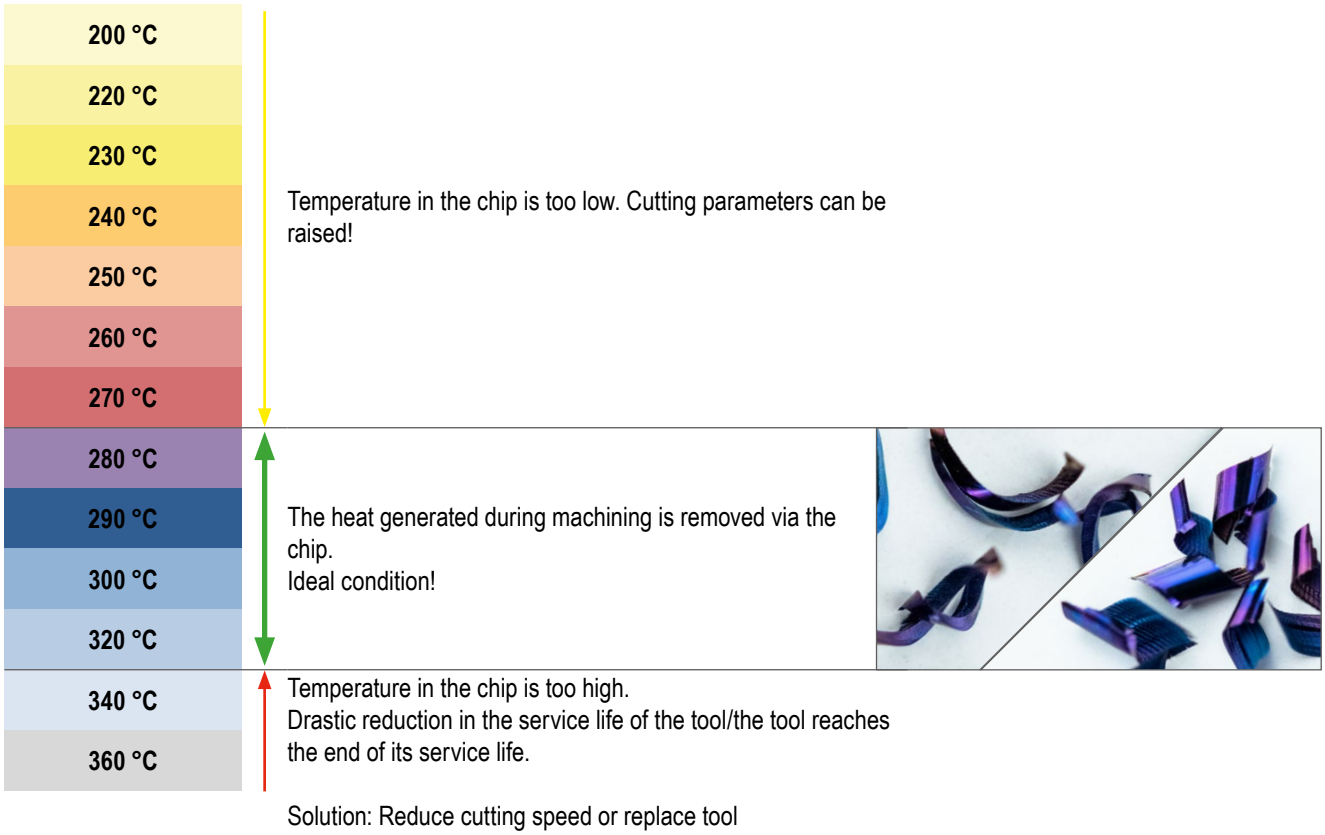

Tips for Tool Selection

Rake and helix angles combined with the coating are decisive factors for the operational area.

Characteristics	Benefits
Helix angle with slow spiral	
▲ For materials with high tensile strength	▲ High edge stability
▲ For high material removal rates	▲ Low tendency to edge chipping
▲ For slot milling, pocket milling, rough milling	
Helix angle with quick spiral	
▲ For soft steels, non ferrous metals, etc.	▲ Soft cut
▲ For low material removal rates	▲ Low cutting forces
▲ Typical for finishing processes	
Small rake angles are applied	
▲ For hard, brittle materials	▲ High edge stability
▲ For high material removal rates	▲ Low tendency to edge chipping
▲ For rough machining	
Large rake angles are applied	
▲ For soft materials	▲ Soft cut
▲ For low material removal rates	▲ Low cutting forces
▲ For finishing	▲ Favorable chip flow
	▲ Low tendency to stick

Correction factor for solid carbide milling cutters

Factors for cutting speed (v_c) and feed rate (f_z) in relation to the overhang length (LPR)

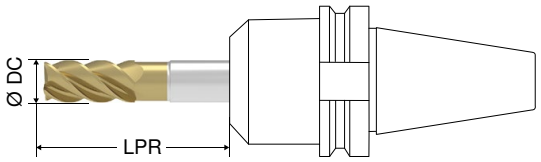

Length					
Overhang length (LPR)	1,5 x DC	4 x DC	8 x DC	12 x DC	> 12 x DC
Factor for v_c (Kf v_c)	1,0	1,0	0,9	0,85	0,7
Factor for f_z (Kf f_z)	1,2	1,0	0,8	0,7	0,5

Factors for cutting speed (v_c) and feed rate (f_z) in relation to the cutting depth (a_p) and cutting width (a_e)

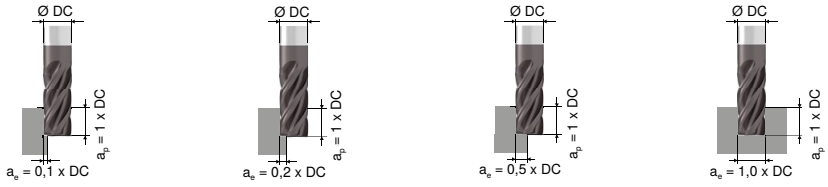

Factor for v_c (Kf v_c)	1,3	1,1	1,0	0,85
Factor for f_z (Kf f_z)	1,5	1,3	1,0	0,8

Calculation aid for copy milling

Theoretical surface roughness (R_{th}) and step over (b_r)

$$R_{th} = r - \sqrt{\frac{(r \times 2)^2 - b_r^2}{4}}$$

$$b_r = 2 \times \sqrt{R_{th} \times (r \times 2 - R_{th})}$$

$$R_{th} \simeq R_a / 0{,}1$$

$$R_a \simeq 0{,}1 \times R_{th}$$

When copy milling, in order to achieve as smooth a surface as possible, the step over b_r should be adapted to the cutter diameter DC. The smaller the cutter diameter DC is, the smaller the step over b_r must be.

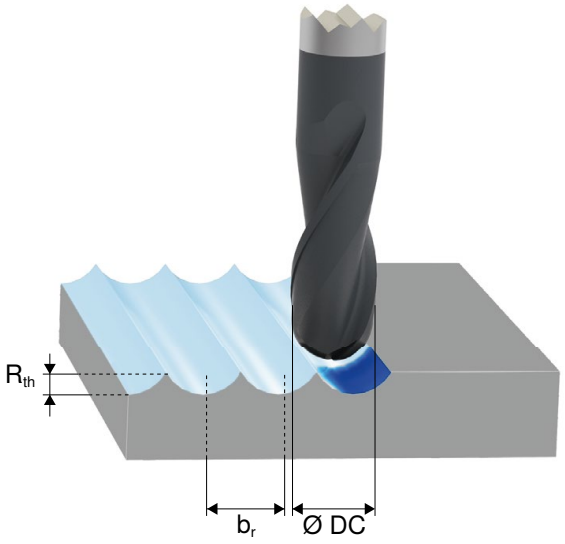

RPM correction factor (Kf n) for copy milling

$$n = \frac{v_c \times 1000}{DC \times \pi} \times Kf\,n$$

Rough machining

	Peripheral and ball nose copy milling	Ball nose copy milling	
			
Axial milling depth a_p	0,5 x DC	> 0,5 x DC	0,2 x DC – 0,5 x DC
Step over b_r	1 x DC	0,2 x DC – 0,5 x DC	0,2 x DC – 0,5 x DC
Correction factor (Kf n)	1	1	1,1

Finish milling

	Ball nose copy milling		
			
Axial milling depth a_p	< 0,2 x DC	0,2 x DC – 0,5 x DC	> 0,5 x DC
Step over b_r	< 0,2 x DC	< 0,2 x DC	< 0,2 x DC
Correction factor (Kf n)	2	1,3	1

14

Calculation aid for copy milling

For peripheral milling or ball nosed copy milling at cutting depths of $\mathbf{a_p} \geq 0.5 \times DC$ and $\mathbf{a_e}$ = **0.2 to 0.5 x DC** the rpm can be calculated with the following fomula:

$$n = \frac{v_C \times 1000}{DC \times \pi}$$



When ball milling the effective milling diameter $\mathbf{d_{eff.}}$ must be determined using the following formula:

Ball nose milling cutters

$$d_{eff.} = 2 \times \sqrt{a_p \times (DC - a_p)}$$



$$d_{eff.} = DC \times \sin\left(\beta \pm \arccos\left(\frac{DC - 2a_p}{DC}\right)\right)$$



Torus end milling cutters

$$d_{eff.} = (DC - 2RE) + 2 \times \sqrt{a_p \times (2RE - a_p)}$$



Information concerning plunge and draw milling

1. When machining the profile flanks relatively high feed rates are possible as the cutting depth is relatively low (area highlighted in blue).

2. A large increase in cutting depth occurs when the base of the profile is reached. Here the feed rate must be reduced as othwerwise tool breakage can occur due to vibrations, misalignment or chattering.

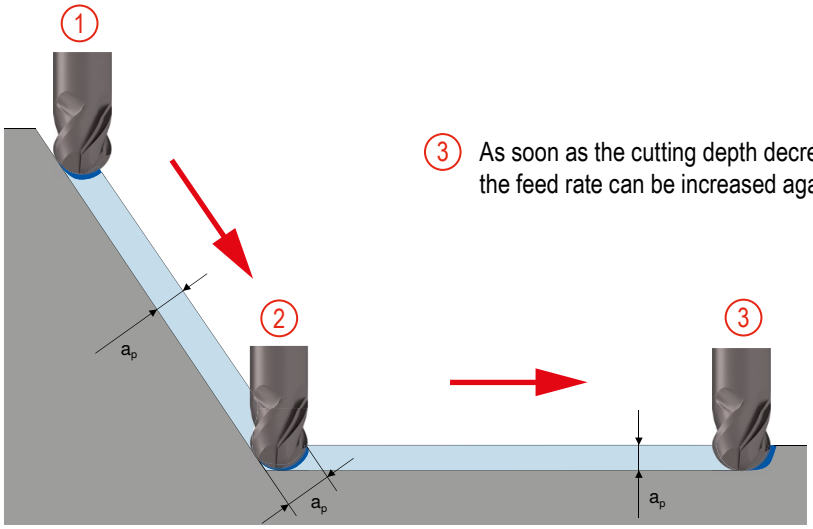

3. As soon as the cutting depth decreases during the machining of the profile base, the feed rate can be increased again.

Rule:
The steeper the angle, the lower the feed rate.
The shallower the angle, the larger the feed rate.

When plunge or draw milling dies, the feed rate has to be adapted to the various milling positions. Otherwise the cutting edge can be damaged due to overload (vibrations, misalignment or chattering).

Version description

CCR AL	Circular Cutter – Non-ferrous metals
CCR H	Circular Cutter – Tempered steel
CCR Ti	Circular Cutter – Heat-resistant alloys
CCR UNI	Circular Cutter – Universal
CCR VA	Circular Cutter – stainless steels
H	For high-strength steels and tempered materials
HR	For high-strength steels and tempered materials – with roughing profile
N	For machining steel and cast materials, as well as stainless steels
NR	For machining steel and cast materials, as well as stainless steels – with roughing profile
NTR	For machining steel and cast materials, as well as stainless steels – with trapezoidal chip breakers
SC UNI	Soft Cut – Universal
SC NR	Soft Cut – with round cord profile
W	For soft materials and non-ferrous metals (aluminium, copper, brass)
WF	For soft materials and non-ferrous metals (aluminium, copper, brass) – with roughing-finishing profile
WR	For soft materials and non-ferrous metals (aluminium, copper, brass) – with roughing profile

MonsterMill

FRP	Fibre Cutter
FRP CR	Fibre cutter – with length-independent compression zone
HCR	Hard Cutter
ICR	Inox Cutter
MCR	Multi Cutter
NCR	Nickel Alloy Cutter
PCR ALU	Plunging Cutter – Non-ferrous metals
PCR UNI	Plunging Cutter – Universal
SCR	Steel Cutter
TCR	Titanium Cutter

Deburring cutters

KEL	Round cone (shape L)
KSJ	Conical 60" (shape J)
KSK	Conical 90" (shape K)
KUD	Spherical (shape D)
RBF	Round arch (shape F)
SKM	Tapered cone (shape M)
SPG	Ogival (shape G)
TRE	Droplet (shape E)
WKN	Angular without spur gearing (shape N)
WRC	Round roller (shape C)
ZYA	Cylindrical without spur gearing (shape A)

Coatings

APA72S
- AlCrN multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1100°C

APB72S
- Special nanolayer coating
- $HV_{0.05}$ = 3300
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 900°C

APX72S
- Special nanolayer coating
- $HV_{0.05}$ = 3800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 1100°C

CTC5240
- TiB2-based coating
- HIT 43 GPa ~ 4300 $HV_{0.05}$
- Friction value against steel 0.3
- Maximum application temperature 1000 °C

CTPX225
- AlTiN-based coating
- HIT 35 GPa ~ 3500 $HV_{0.05}$
- Friction value against steel 0.5
- Maximum application temperature 1000 °C

DIAMOND
- Diamond monolayer coating
- $HV_{0.025}$ = 10,000
- Coefficient of friction (against steel) = 0.2
- Maximum application temperature: 700 °C

DLC
- Diamond-like carbon coating
- Specially for machining non-ferrous metals
- Maximum application temperature: 400°C

DPA52S
- Special nanolayer coating
- $HV_{0.05}$ = 3400
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1100 °C

DPA72S
- Special nanolayer coating
- $HV_{0.05}$ = 3200
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1000 °C

DPB72S
- TiAlCrN multilayer coating
- $HV_{0.05}$ = 3200
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1000 °C

DPX22S
- TiSiXN multilayer coating
- Layer hardness: H_{IT} [GPa] 38
- Maximum application temperature: 1100 °C

DPX52S
- TiSiN multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 1000 °C

DPX62S
- TiAlN multilayer coating
- $HV_{0.05}$ = 3800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 800 °C

DPX62U
- Special TiAlN coating
- $HV_{0.05}$ = 4000
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1150 °C

DPX72S
- Special multilayer coating
- $HV_{0.05}$ = 3400
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 900 °C

Ti28
- Ti multilayer coating
- $HV_{0.05}$ = 2800
- Coefficient of friction (against steel) = 0.1
- Maximum application temperature: 500 °C

Ti40
- Ti monolayer coating
- $HV_{0.05}$ = 4000
- Maximum application temperature: 900 °C

Ti400
- Ti multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 400 °C

Ti1000
- Ti monolayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.3
- Maximum application temperature: 800°C

Ti1001
- Ti monolayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 800 °C

Ti1005
- Ti multilayer coating
- $HV_{0.05}$ = 2800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 600 °C

Ti1050
- Ti multilayer coating
- $HV_{0.005}$ = 3300
- Coefficient of friction (against steel) = 0.3-0.5
- Maximum application temperature: 900 °C

Ti1100
- Ti multilayer coating
- $HV_{0.05}$ = 3200
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1100 °C

Ti1200
- Ti nanolayer coating
- Maximum application temperature: 1100–1200°C

Ti1500
- Ti nanolayer coating
- $HV_{0.05}$ = 3400
- Coefficient of friction (against steel) = 0.7
- Maximum application temperature: 900°C

Ti2000
- Ti multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 900 °C