The eCatalogue 2024

Cutting tools and clamping technology

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

Tooling a Sustainable Future

CERATIZIT: Your specialist in sustainable cutting tools and hard material solutions.

Are you looking for a reliable partner for your tooling and machining needs? Then look no further! CERATIZIT is much more than just a supplier of tools. Our experts are also on hand to advise you with their extensive industry knowledge and decades of experience.

Is an optimised carbon footprint just as important to you as efficient production processes? With the Product Carbon Footprint (PCF) classification system for our innovative carbide solutions, you can choose the best sustainable product for you. Good for the environment, good for your production line.

For more than 100 years, CERATIZIT has been a pioneer in developing exceptional hard material solutions for machining and protection against wear. We can therefore guarantee our customers the highest levels of quality and access to the latest developments in the carbide sector – all-round cutting tools expertise from a single source.

The e-catalogue

This catalogue contains our unique range of tools on the market. Our Toolfinder, located at the beginning of every tool chapter, helps you quickly find the ideal tool, setting you on the right course to increased efficiency in machining.

To our video tutorial

To our video tutorial Navigate to the right tool even faster, save favourites and easily find them again - these are just a few of the convenient features our e-catalogue offers to simplify your search for tool and workpiece clamping solutions. Watch our video tutorial to find out how to get the most out of our e-catalogue.

Solid drilling and bore machining

1 HSS drilling
2 Solid carbide drilling
3 Indexable insert drilling
4 Reaming and Countersinking
5 Spindle Tooling

Threading

6 Taps and thread formers
7 Circular and Thread Milling
8 Thread turning

Turning

9 Turning Tools
10 Multifunctional Tools – EcoCut and FreeTurn
11 Grooving Tools
12 Miniature turning tools

Milling

13 HSS Milling Cutters
14 Solid Carbide milling cutters
15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories
17 Workpiece clamping

18 Material examples and article no. Index

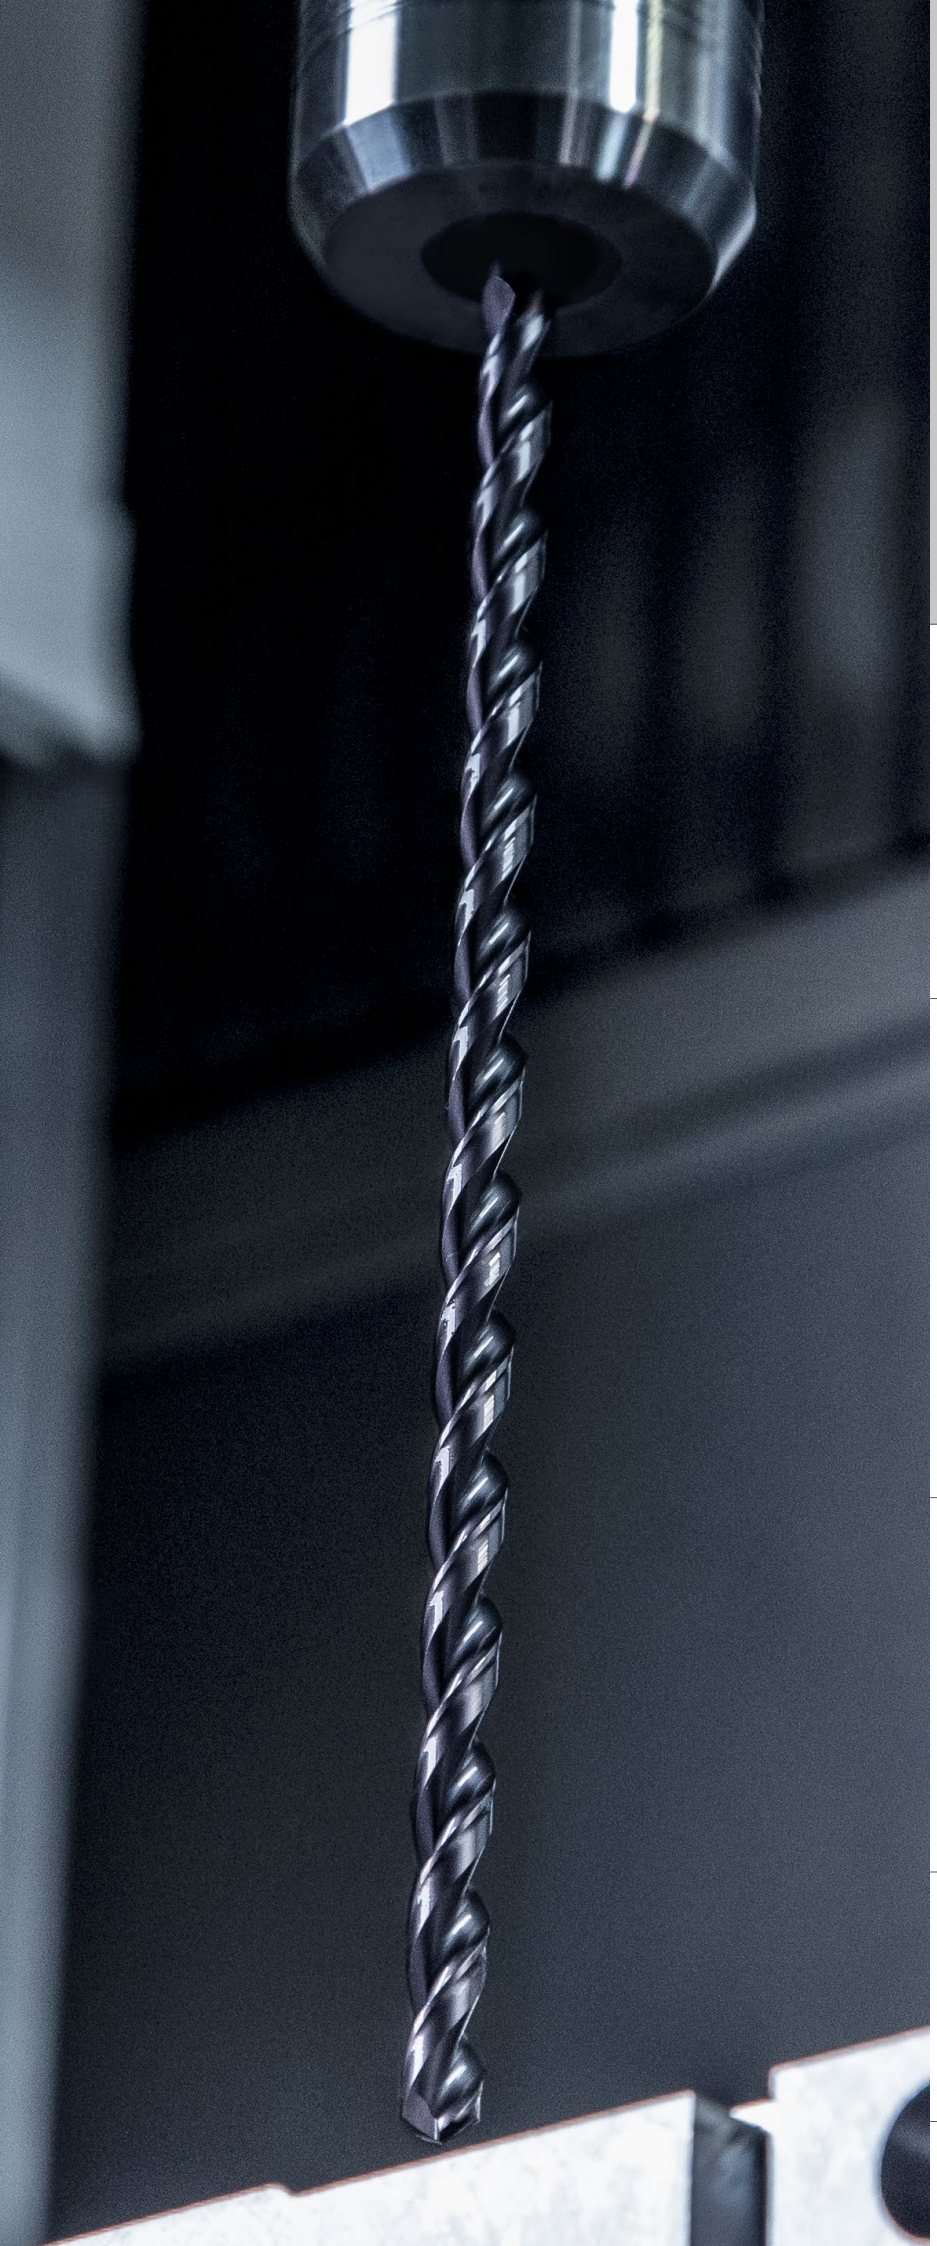

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Toolfinder	5
List of contents	6–8
Product programme	9–42
Technical Information	
Cutting Data	43–53
Feedrate Values	54
Coatings and cutting materials	55

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Symbol explanation

Shank

Plain cylindrical shank

Cylindrical shank with lateral driving face „Weldon“

Morse taper

Version

Int. coolant supply

self-centering

● = **Main Application**

○ = Extended application

Toolfinder

	Tool type	Cutting material/ Coating	Description	DIN 1897	DIN 338	DIN 340	Series 1	series 2	series 3
				3xD	5xD	10xD	> 10xD		
Steel – Universal	VX	HSS-E TiN	▲ Universal high-performance drill ▲ Shank DIN 1835A ▲ self centering	9	15				
	UNI	HSS-E-PM TiN	▲ Wear-resistant due to HSS-E-PM and TiN coating ▲ Universal high-performance drill	10–14	16–21				
	UNI	HSS-E TiN	▲ As for Type VX ▲ Without standard shank to DIN 1835 A ▲ Available as a set	10–14	16–21	24–26			
	N	HSS vap.	▲ stable twist drill ▲ also suitable for portable drills ▲ available in set	10–14	16–21				
	WT	HSS-E vap.	▲ for high alloy steel and special alloys (Hastelloy, Inconel, Nimonic)	10–14					
	WT	HSS-E TiN	▲ as Type WT HSS-E vap. ▲ higher wear resistance due to coating	10–14					
	WTL	HSS-E F.-nit	▲ special flute profile with large chip gullet ▲ nitrided cutting edge giving increased wear protection to cutting corners and guide lands		16–21	24–26			
	WTL	HSS-E TiN	▲ as WTL HSS-E, but higher v_c and wear resistance due to coating ▲ suitable for steel and cast iron		16–21				
	WTL	HSS-E TiAlN	▲ Special flute profile with large chip spaces ▲ Higher wear resistance due to TiAlN coating				27	28	28
	WTL	HSS F.-nit	▲ special flute profile with large chip gullet ▲ nitrided cutting edge giving increased wear protection to cutting corners and guide lands				27	28	28
	WTL	HSS TiN	▲ as WTL HSS, but higher v_c and wear resistance due to coating			24–26			
	WNX	HSS-E	▲ Wide chip flutes for long-chipping materials ▲ Self-centring	10–14					
	NC	HSS TiAlN	▲ suitable for use with drill bushes ▲ very good chip evacuation with thro' coolant ▲ higher v_c and wear resistance due to coating			23			
Stainless steel	VA	HSS-E	▲ Specialist for stainless and acid-resistant materials ▲ special geometry	10–14	16–21				
Non-ferrous metals	W	HSS	▲ Specialist for non-ferrous metals		16–21				
	WTW	HSS	▲ for non-ferrous metals to 500 N/mm² ▲ for deep holes			24–26			

HSS Drills Overview

	Tool type	Cutting material | Coating	Point angle SIG	Diameter in mm DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non metal materials O		coated ■	uncoated □	WNT \ Performance
3xD without thro' coolant															
	VX	HSS-E TiN	118°	2–20	●	●	●	○	○		○		■		9
	UNI	HSS-E-PM TiN	130°	1–14	●		●	○	○	○	○		■		10–14
	UNI	HSS-E TiN	118°	1–14	●	●	●	○	○		○		■		10–14
	N	HSS vap.	118°	0,4–20	○		●	○			○		■		10–14
	VA	HSS-E	130°	1–12	○	●		●	○					□	10–14
	WNX	HSS-E	130°	1–20	●		●	○	○	○	○			□	10–14
	WT	HSS-E vap.	130°	0,4–25	●	●	●	○	○	○			■		10–14
	WT	HSS-E TiN	130°	1–20	●	●	●	○	●	○			■		10–14
5xD without thro' coolant															
	VX	HSS-E TiN	118°	2–20	●	●	●	○	○		○		■		15
	UNI	HSS-E-PM TiN	130°	1–14	●		●	○	○	○	○		■		16–21
	UNI	HSS-E TiN	118°	0,9–14	●	●	●	○	○		○		■		16–21
	N	HSS vap.	118°	0,2–20	○		●	○			○		■		16–21
	VA	HSS-E	130°	1–12	○	●		●	○					□	16–21
	W	HSS	130°	0,20–20				●						□	16–21
	WTL	HSS-E F-nit.	130°	1–16	●	○	●	●	○	○	○		■		16–21
	WTL	HSS-E TiN	130°	1–16	●	○	●	○	○	○	○		■		16–21
up to 10xD without thro' coolant															
	UNI	HSS-E TiN	118°	1–14	●	●	●	○	○		○		■		24–26
	WTL	HSS-E F-nit.	130°	1–12	●	○	●	●	○	○	○		■		24–26
	WTL	HSS TiN	130°	1–14	○		●	○			○		■		24–26
	WTW	HSS	130°	1–14				●						□	24–26

HSS Drills Overview

	Tool type	Cutting material | Coating	Point angle SIG	Diameter in mm DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non metal materials O		coated ■	uncoated □	WNT \ Performance
up to 10xD with thro' coolant															
	NC	HSS TiAlN	130°	3–13	○	○	●	○			○		■		23
over 10xD without thro' coolant															
	WTL	HSS F-nit. Series 1	130°	2–13	●		●	●			○		■		27
	WTL	HSS F-nit. series 2	130°	2–13	●		●	●			○		■		28
	WTL	HSS F-nit. series 3	130°	2,5–13	●		●	●			○		■		28
	WTL	HSS-E TiAlN Series 1	130°	3–10,2	●		●	●			○		■		27
	WTL	HSS-E TiAlN series 2	130°	3–12	●		●	●			○		■		28
	WTL	HSS-E TiAlN series 3	130°	4–10	●		●	●			○		■		28
Mini-drill															
	N	HSS-E-PM	118°	0,15–1,45	●	○	●	●	○		○			□	29
Twist Drill Sets															
	N	HSS vap.	118°	1–10	○		●	○			○		■		22
	UNI	HSS-E TiN	118°	1–10	●	●	●	○	○		○		■		22
NC Spot Drill															
	NC-A	HSS	90°	3–20	●	○	●	○	○		○			□	33–35
	NC-A	HSS TiN	90°	3–20	●	○	●	○	○		○		■		33+34
	NC-A	HSS	120°	3–20	●	○	●	○	○		○			□	33+34
	NC-A	HSS TiN	120°	3–20	●	○	●	○	○		○		■		33+34
Centre drills															
	ZB	HSS	118°	0,5–6,3	●	○	●	○	○		○	DIN 333 – Form A/B/R		□	35–37
	ZB	HSS TiN	118°	0,5–6,3	●	○	●	○	○		○	DIN 333 – Form A	■		36
	ZB	HSS-E	118°	0,5–6,3	●	○	●	○	○		○	DIN 333 – Form A		□	36

HSS Drills Overview

	Tool type	Cutting material | Coating	Point angle SIG	Diameter in mm DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non metal materials O		coated ■	uncoated □	WNT \ Performance
Stepped drills															
	SB	HSS vap.	118°	2,5–10,2	●	○	●	○	○		○	Countersinking angle 90°	■		39
	SB	HSS	118°	2,5–10,2	●	○	●	○	○		○	Countersinking angle 90°		□	39
	SB	HSS vap.	118°	3,2–10,5	●	○	●	○	○		○	Countersinking angle 90°	■		39
	SB	HSS	118°	3,2–10,5	●	○	●	○	○		○	Countersinking angle 90°		□	39
	SB	HSS vap.	118°	3,4–11	●	○	●	○	○		○	Countersinking angle 180°	■		40
	SB	HSS	118°	3,4–11	●	○	●	○	○		○	Countersinking angle 180°		□	40
	SB	HSS vap.	118°	3,3–17,5	●	○	●	○	○		○	Countersinking angle 60°	■		42
Drills with Morse taper															
3xD															
	WT	HSS-E vap.	130°	13–30	●	●	●	○	○	○			■		29
5xD															
	N	HSS vap.	118°	10–55	○		●	○			○		■		30
	WTL	HSS-E F.-nit/vap.	130°	10–27	●	○	●	●	○	○	○		■		30
10xD															
	N	HSS vap.	118°	10–50	○		●	○			○		■		31
	WTL	HSS-E F.-nit/vap.	130°	10–25	●	○	●	●	○	○	○		■		31
above 10xD															
	WTL	HSS F.-nit/vap. Series 1	130°	10–30	●			●	●		○		■		32
	WTL	HSS F.-nit/vap. series 2	130°	10–30	●		●	●			○		■		32
Core drills															
	N	HSS vap.	120°	12–30	●	○	●	○	○		○	3 Edges	■		38
Stepped drills															
	SB	HSS vap.	118°	6,6–17,5	●	○	●	○	○		○	Countersinking angle 180°	■		41

High-performance twist drills similar to DIN 1897, extra-short

- ▲ Shank to DIN 1835 A
- ▲ Special point thinning
- ▲ Very good centering behaviour
- ▲ 4 facet
- ▲ Highest Performance

≤ 3xD

VX

TiN



SIG 118°
HSS-E

10 122 ...

DC h8 mm	OAL mm	LCF mm	DCONMS h6 mm	LS mm	EUR T2	
2,00	44	12	3	28	11,61	020
2,10	44	12	3	28	12,79	021
2,20	45	13	3	28	13,92	022
2,30	45	13	3	28	13,92	023
2,40	46	14	3	28	14,62	024
2,50	46	14	3	28	12,58	025
2,60	46	14	3	28	14,62	026
2,70	48	16	3	28	15,31	027
2,80	48	16	3	28	15,31	028
2,90	48	16	3	28	15,31	029
3,00	48	16	3	28	13,92	030
3,10	50	18	4	28	13,92	031
3,20	50	18	4	28	13,92	032
3,30	50	18	4	28	14,08	033
3,40	52	20	4	28	14,08	034
3,50	52	20	4	28	13,40	035
3,60	52	20	4	28	14,48	036
3,70	52	20	4	28	15,15	037
3,80	54	22	4	28	14,75	038
3,90	54	22	4	28	15,15	039
4,00	54	22	4	28	12,37	040
4,10	66	22	6	36	12,37	041
4,20	66	22	6	36	12,92	042
4,30	68	24	6	36	13,65	043
4,40	68	24	6	36	15,31	044
4,50	68	24	6	36	12,50	045
4,60	68	24	6	36	16,39	046
4,70	68	24	6	36	16,52	047
4,80	70	26	6	36	16,52	048
4,90	70	26	6	36	16,52	049
5,00	70	26	6	36	13,92	050
5,10	70	26	6	36	16,52	051
5,20	70	26	6	36	16,80	052
5,30	70	26	6	36	17,21	053
5,40	72	28	6	36	18,72	054
5,50	72	28	6	36	14,75	055
5,55	72	28	6	36	18,72	555
5,60	72	28	6	36	18,72	056
5,70	72	28	6	36	18,72	057
5,80	72	28	6	36	18,72	058
5,90	72	28	6	36	18,72	059
6,00	72	28	6	36	15,44	060
6,10	75	31	8	36	24,03	061
6,20	75	31	8	36	24,03	062
6,30	75	31	8	36	29,24	063
6,40	75	31	8	36	24,73	064
6,50	75	31	8	36	18,31	065
6,60	75	31	8	36	29,64	066
6,70	75	31	8	36	29,64	067
6,80	78	34	8	36	31,84	068
6,90	78	34	8	36	32,25	069
7,00	78	34	8	36	24,34	070
7,10	78	34	8	36	35,79	071

10 122 ...

DC h8 mm	OAL mm	LCF mm	DCONMS h6 mm	LS mm	EUR T2	
7,20	78	34	8	36	35,67	072
7,30	78	34	8	36	35,67	073
7,40	78	34	8	36	35,79	074
7,45	78	34	8	36	35,79	745
7,50	78	34	8	36	25,69	075
7,60	81	37	8	36	35,93	076
7,70	81	37	8	36	40,03	077
7,80	81	37	8	36	40,03	078
7,90	81	37	8	36	40,03	079
8,00	81	37	8	36	26,38	080
8,10	87	37	10	40	43,98	081
8,20	87	37	10	40	43,98	082
8,30	87	37	10	40	43,98	083
8,40	87	37	10	40	43,98	084
8,50	87	37	10	40	29,78	085
8,60	91	40	10	40	45,91	086
8,70	91	40	10	40	45,91	087
8,80	91	40	10	40	45,91	088
8,90	91	40	10	40	45,91	089
9,00	91	40	10	40	32,80	090
9,10	91	40	10	40	56,43	091
9,20	91	40	10	40	56,43	092
9,30	91	40	10	40	56,43	093
9,35	91	40	10	40	56,43	935
9,40	91	40	10	40	56,43	094
9,50	91	40	10	40	39,34	095
9,60	93	43	10	40	42,49	096
9,70	93	43	10	40	42,49	097
9,80	93	43	10	40	42,49	098
9,90	93	43	10	40	42,49	099
10,00	93	43	10	40	37,70	100
10,20	100	43	12	45	55,60	102
10,30	100	43	12	45	57,66	103
10,50	100	43	12	45	54,24	105
10,70	104	47	12	45	60,12	107
10,80	104	47	12	45	57,78	108
11,00	104	47	12	45	54,24	110
11,10	104	47	12	45	53,84	111
11,50	104	47	12	45	56,43	115
11,70	104	47	12	45	64,48	117
11,80	104	47	12	45	67,63	118
11,90	108	51	12	45	84,99	119
12,00	108	51	12	45	65,03	120
12,10	111	51	16	48	47,96	121
12,30	111	51	16	48	87,85	123
12,50	111	51	16	48	68,04	125
12,70	111	51	16	48	150,30	127
12,80	111	51	16	48	71,32	128
13,00	111	51	16	48	73,09	130
13,50	114	54	16	48	107,90	135
14,00	114	54	16	48	107,90	140
14,50	116	56	16	48	138,00	145
15,00	116	56	16	48	130,10	150
15,50	118	58	16	48	142,10	155
16,00	118	58	16	48	136,20	160
16,50	126	60	20	50	211,80	165
17,00	126	60	20	50	211,80	170
17,50	128	62	20	50	211,80	175
18,00	128	62	20	50	211,80	180
18,50	130	64	20	50	211,80	185
19,00	130	64	20	50	211,80	190
19,50	132	66	20	50	211,80	195
20,00	132	66	20	50	187,30	200

P	●
M	●
K	●
N	○
S	○
H	
O	○

→ v_c Page 44

High-performance twist drills similar to DIN 1897, extra-short

≤ 3xD



UNI	UNI	N	VA	WNX	WT	WT
TiN	TiN	vap.			vap.	TiN

SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E
10 113 ...	**10 107 ...**	**10 105 ...**	**10 130 ...**	**10 106 ...**	**10 109 ...**	**10 110 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
0,40		19	2,5					5,18	004 [1]					8,68	00400 [1]
0,50		20	3,0					3,89	005 [1]					6,43	00500 [1]
0,55		21	3,5											15,04	00550 [1]
0,60		21	3,5					4,76	006 [1]					7,64	00600 [1]
0,65		22	4,0											8,33	00650 [1]
0,70		23	4,5					4,43	007 [1]					7,01	00700 [1]
0,75		23	4,5											7,30	00750 [1]
0,80		24	5,0					3,41	008 [1]					6,10	00800 [1]
0,85		24	5,0											6,89	00850 [1]
0,90		25	5,5					3,41	009 [1]					6,10	00900 [1]
0,95		25	5,5											6,89	00950 [1]
1,00		26	6,0	10,19	010 [2]	6,12	010 [2]	1,88	010 [1]	2,58	010	3,95	010	4,34	01000 [1]	6,01	010
1,05		26	6,0											5,84	01050 [1]		
1,10		28	7,0	10,19	011 [2]	6,12	011 [2]	2,00	011 [1]	2,58	011	4,32	011	4,15	01100 [1]	6,27	011
1,15		28	7,0											4,64	01150 [1]		
1,20		30	8,0	10,44	012 [2]	6,28	012 [2]	2,00	012 [1]	2,36	012	4,27	012	4,02	01200 [1]	5,86	012
1,25		30	8,0											4,64	01250 [1]		
1,30		30	8,0	11,01	013 [2]	6,59	013 [2]	2,00	013 [1]	2,36	013	4,16	013	4,15	01300 [1]	6,27	013
1,35		32	9,0											4,64	01350 [1]		
1,40		32	9,0	10,07	014 [2]	6,03	014 [2]	2,00	014 [1]	2,36	014	4,16	014	4,15	01400 [1]	6,27	014
1,45		32	9,0											4,64	01450 [1]		
1,50		32	9,0	9,51	015 [2]	5,69	015 [2]	1,55	015 [1]	2,36	015	3,80	015	3,85	01500 [1]	5,86	015
1,55		34	10,0											6,03	01550 [1]		
1,60		34	10,0	9,95	016 [2]	5,96	016 [2]	1,82	016 [1]	2,89	016	4,13	016	3,74	01600 [1]	5,67	016
1,65		34	10,0											4,97	01650 [1]		
1,70		34	10,0	10,07	017 [2]	6,03	017 [2]	1,82	017 [1]	2,89	017	4,05	017	3,70	01700 [1]	5,60	017
1,75		36	11,0											4,59	01750 [1]		
1,80		36	11,0	9,95	018 [2]	5,96	018 [2]	1,93	018 [1]	2,89	018	4,05	018	3,77	01800 [1]	5,74	018
1,83		36	11,0											6,77	01830 [1]		
1,85		36	11,0											4,28	01850 [1]		
1,90		36	11,0	9,95	019 [2]	5,96	019 [2]	1,82	019 [1]	2,89	019	4,02	019	3,77	01900 [1]	5,74	019
1,95		38	12,0											6,70	01950 [1]		
2,00		38	12,0	8,33	020 [2]	4,99	020 [2]	1,20	020 [1]	2,89	020	3,43	020	3,31	02000 [1]	4,87	020
2,05		38	12,0											6,03	02050 [1]		
2,10		38	12,0	10,19	021 [2]	6,12	021 [2]	1,74	021 [1]	2,89	021	3,80	021	3,66	02100 [1]	5,49	021
2,15		40	13,0											5,67	02150 [1]		
2,20		40	13,0	10,19	022 [2]	6,12	022 [2]	1,74	022 [1]	2,89	022	3,85	022	4,26	02200 [1]	6,01	022
2,25		40	13,0											4,59	02250 [1]		
2,30		40	13,0	8,58	023 [2]	5,18	023 [2]	1,82	023 [1]	2,89	023	4,00	023	3,95	02300 [1]	6,01	023
2,35		40	13,0											6,43	02350 [1]		
2,38	3/32	43	14,0	9,43	238 [2]	5,64	238 [2]										
2,40		43	14,0	10,26	024 [2]	6,18	024 [2]	1,82	024	2,89	024	4,05	024	4,11	02400	6,21	024
2,45		43	14,0											4,87	02450		
2,50		43	14,0	8,95	025 [2]	5,43	025 [2]	1,38	025	2,89	025	3,80	025	3,51	02500	5,32	025
2,55		43	14,0											6,43	02550		
2,60		43	14,0	10,58	026 [2]	6,38	026 [2]	1,88	026	2,89	026	4,05	026	4,11	02600	6,21	026
2,65		43	14,0											6,43	02650		
2,70		46	16,0	11,26	027 [2]	6,78	027 [2]	1,88	027	2,89	027	4,13	027	4,28	02700	6,58	027

P	●	●	○	○	●	●	●
M		●		●		●	●
K	●	●	●		●	●	●
N	○	○	○	●	○	○	○
S	○	○		○	○	○	●
H	○				○	○	○
O	○	○	○		○		

1) uncoated
2) self-centering

→ v_c Page 44+45

Continued on next page

High-performance twist drills similar to DIN 1897, extra-short

≤ 3xD



UNI	UNI	N	VA	WNX	WT	WT
TiN	TiN	vap.			vap.	TiN

SIG 130°	SIG 118°	SIG 118°	SIG 130°	SIG 130°	SIG 130°	SIG 130°
HSS-E-PM	HSS-E	HSS	HSS-E	HSS-E	HSS-E	HSS-E
10 113 ...	**10 107 ...**	**10 105 ...**	**10 130 ...**	**10 106 ...**	**10 109 ...**	**10 110 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
2,75		46	16,0										6,43	02750	
2,78	7/64	46	16,0	10,93	278 [2]	6,56	278 [2]								
2,80		46	16,0	10,44	028 [2]	6,28	028 [2]	1,88	028	2,89	028	4,32	028	4,28	02800	6,58	028
2,85		46	16,0											6,38	02850		
2,90		46	16,0	11,11	029 [2]	6,70	029 [2]	1,88	029	2,89	029	4,48	029	4,28	02900	6,58	029
2,95		46	16,0											4,59	02950		
3,00		46	16,0	9,43	030 [2]	5,64	030 [2]	1,38	030	2,89	030	4,05	030	3,77	03000	5,62	030
3,05		49	18,0											4,73	03050		
3,10		49	18,0	10,07	031 [2]	6,03	031 [2]	1,88	031	2,89	031	4,67	031	4,28	03100	6,46	031
3,15		49	18,0											6,89	03150		
3,17	1/8	49	18,0	9,95	317 [2]	5,96	317 [2]								
3,20		49	18,0	9,51	032 [2]	5,69	032 [2]	1,74	032	2,89	032	4,00	032	4,11	03200	6,10	032
3,25		49	18,0											4,76	03250		
3,30		49	18,0	9,51	033 [2]	5,69	033 [2]	1,82	033	2,89	033	4,32	033	4,43	03300	6,58	033
3,35		49	18,0											6,38	03350		
3,40		52	20,0	11,01	034 [2]	6,59	034 [2]	2,31	034	2,89	034	4,92	034	4,39	03400	6,58	034
3,45		52	20,0											4,76	03450		
3,50		52	20,0	9,51	035 [2]	5,69	035 [2]	1,55	035	2,89	035	4,80	035	4,34	03500	5,97	035
3,55		52	20,0											4,87	03550		
3,57	9/64	52	20,0	10,75	357 [2]	6,47	357 [2]								
3,60		52	20,0	12,61	036 [2]	7,58	036 [2]	2,31	036	3,31	036	4,92	036	4,43	03600	6,58	036
3,70		52	20,0	10,93	037 [2]	6,56	037 [2]	2,31	037	3,31	037	4,92	037	4,73	03700	7,10	037
3,75		52	20,0											4,97	03750		
3,80		55	22,0	11,61	038 [2]	6,98	038 [2]	2,31	038	3,31	038	5,22	038	4,59	03800	6,74	038
3,85		55	22,0											7,64	03850		
3,90		55	22,0	13,17	039 [2]	7,92	039 [2]	2,31	039			5,22	039	4,69	03900	7,10	039
3,95		55	22,0											7,74	03950		
3,97	5/32	55	22,0	11,85	397 [2]	7,10	397 [2]								
4,00		55	22,0	10,75	040 [2]	6,47	040 [2]	1,65	040	4,91	040	5,18	040	4,64	04000	6,10	040
4,05		55	22,0											5,45	04050		
4,10		55	22,0	12,31	041 [2]	7,41	041 [2]	2,00	041	4,91	041	5,26	041	4,82	04100	6,74	041
4,15		55	22,0											7,68	04150		
4,20		55	22,0	10,75	042 [2]	6,47	042 [2]	1,93	042	4,91	042	4,80	042	4,73	04200	6,74	042
4,25		55	22,0											8,36	04250		
4,30		58	24,0	12,25	043 [2]	7,37	043 [2]	3,11	043	4,91	043	5,42	043	5,01	04300	7,49	043
4,35		58	24,0											8,39	04350		
4,37	11/64	58	24,0	16,52	437 [2]	9,90	437 [2]								
4,40		58	24,0	13,17	044 [2]	7,92	044 [2]	3,11	044			5,42	044	5,21	04400	7,68	044
4,45		58	24,0											8,63	04450		
4,50		58	24,0	12,25	045 [2]	7,37	045 [2]	2,00	045	5,17	045	5,42	045	4,97	04500	6,36	045
4,55		58	24,0											8,39	04550		
4,60		58	24,0	12,31	046 [2]	7,41	046 [2]	3,15	046	5,17	046	5,63	046	5,51	04600	8,36	046
4,65		58	24,0											7,51	04650	8,49	465
4,70		58	24,0	13,80	047 [2]	8,24	047 [2]	3,15	047	5,17	047	6,01	047	5,69	04700	8,49	047
4,75		58	24,0											7,51	04750		
4,76	3/16	62	26,0	13,80	476 [2]	8,24	476 [2]								
4,80		62	26,0	13,92	048 [2]	8,39	048 [2]	3,15	048	5,33	048	6,28	048	5,97	04800	8,46	048
4,85		62	26,0											6,89	04850		

P	●	●	○	○	●	●	●
M		●		●		●	●
K	●	●	●		●	●	●
N	○	○	○	●	○	○	○
S	○	○		○	○	○	●
H	○				○	○	○
O	○	○	○		○		

1) uncoated
2) self-centering

→ v_c Page 44+45

Continued on next page

High-performance twist drills similar to DIN 1897, extra-short

≤ 3xD



UNI	UNI	N	VA	WNX	WT	WT
TiN	TiN	vap.			vap.	TiN

SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E
10 113 ...	**10 107 ...**	**10 105 ...**	**10 130 ...**	**10 106 ...**	**10 109 ...**	**10 110 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
4,90		62	26,0	14,08	049 [2]	8,47	049 [2]	3,15	049	5,33	049	6,56	049	6,55	04900	8,46	049
4,95		62	26,0											9,81	04950		
5,00		62	26,0	11,85	050 [2]	7,10	050 [2]	2,12	050	5,33	050	5,81	050	5,32	05000	6,89	050
5,05		62	26,0											11,58	05050		
5,10		62	26,0	13,04	051 [2]	7,85	051 [2]	3,20	051	5,33	051						
5,16	13/64	62	26,0	15,57	516 [2]	9,33	516 [2]										
5,20		62	26,0	14,08	052 [2]	8,47	052 [2]	3,20	052	6,07	052	6,81	052	8,49	05200	8,86	052
5,25		62	26,0											10,05	05250		
5,30		62	26,0	15,99	053 [2]	9,63	053 [2]	3,20	053	6,07	053	7,01	053	9,35	05300	9,02	053
5,40		66	28,0	15,57	054 [2]	9,39	054 [2]	3,66	054								
5,50		66	28,0	13,37	055 [2]	8,01	055 [2]	2,78	055	6,07	055	7,26	055	6,77	05500	7,41	055
5,55		66	28,0											18,31	05550	9,64	555
5,56	7/32	66	28,0	14,62	556 [2]	8,78	556 [2]										
5,60		66	28,0	15,99	056 [2]	9,63	056 [2]	3,66	056	6,10	056	7,73	056	11,19	05600	9,64	056
5,70		66	28,0	17,08	057 [2]	10,25	057 [2]	3,66	057	6,10	057	7,79	057	11,40	05700	9,64	057
5,75		66	28,0											13,44	05750		
5,80		66	28,0	16,39	058 [2]	9,87	058 [2]	3,66	058	6,10	058	7,91	058	11,58	05800	9,64	058
5,85		66	28,0											19,53	05850		
5,90		66	28,0	18,03	059 [2]	10,82	059 [2]	3,66	059	6,10	059	7,99	059	12,13	05900	9,92	059
5,95	15/64	66	28,0	27,33	595 [2]	16,52	595 [2]							12,31	05950		
6,00		66	28,0	14,48	060 [2]	8,62	060 [2]	2,78	060	6,57	060	7,07	060	6,77	06000	7,78	060
6,05		70	31,0											19,53	06050		
6,10		70	31,0	16,95	061 [2]	10,15	061 [2]	3,95	061								
6,20		70	31,0	16,95	062 [2]	10,15	062 [2]	3,95	062								
6,30		70	31,0	19,40	063 [2]	11,60	063 [2]	3,95	063								
6,35	1/4	70	31,0	17,77	635 [2]	10,69	635 [2]										
6,40		70	31,0	17,90	064 [2]	10,78	064 [2]	4,10	064							13,15	064
6,50		70	31,0	16,95	065 [2]	10,15	065 [2]	3,30	065	7,50	065	8,46	065	7,91	06500	9,73	065
6,55		70	31,0											20,09	06550		
6,60		70	31,0	18,57	066 [2]	11,20	066 [2]	4,10	066	7,50	066						
6,65		70	31,0											21,17	06650		
6,70		70	31,0	20,50	067 [2]	12,29	067 [2]	4,48	067	7,50	067						
6,75		74	34,0	25,27	675 [2]	15,04	675 [2]										
6,80		74	34,0	20,65	068 [2]	12,36	068 [2]	5,18	068	7,76	068	10,62	068	16,12	06800	14,22	068
6,90		74	34,0	20,35	069 [2]	12,16	069 [2]	5,58	069	7,76	069						
7,00		74	34,0	18,85	070 [2]	11,34	070 [2]	4,03	070	7,76	070	9,20	070	9,02	07000	11,66	070
7,10		74	34,0	22,82	071 [2]	13,80	071 [2]	5,75	071								
7,14	9/32	74	34,0	30,33	714 [2]	18,17	714 [2]										
7,20		74	34,0	23,51	072 [2]	14,22	072 [2]	5,86	072	8,25	072	13,44	072	17,35	07200	15,73	072
7,25		74	34,0											20,65	07250		
7,30		74	34,0	25,27	073 [2]	15,15	073 [2]	6,02	073								
7,40		74	34,0	23,65	074 [2]	14,34	074 [2]	6,46	074			15,57	074	17,77	07400	15,84	074
7,50		74	34,0	19,68	075 [2]	11,83	075 [2]	4,48	075	8,25	075	10,09	075	10,47	07500	12,19	075
7,60		79	37,0	30,75	076 [2]	18,46	076 [2]	7,16	076			14,62	076	18,57	07600	17,63	076
7,70		79	37,0	33,20	077 [2]	19,96	077 [2]	7,16	077	8,69	077	15,04	077	19,40	07700	17,63	077
7,75		79	37,0											24,03	07750		
7,80		79	37,0	25,41	078 [2]	15,31	078 [2]	7,16	078			15,04	078	19,80	07800	17,77	078
7,90		79	37,0	35,52	079 [2]	21,33	079 [2]	7,26	079	8,69	079	14,34	079	20,22	07900	17,77	079

P	●	●	○	○	●	●	●
M		●		●		●	●
K	●	●	●		●	●	●
N	○	○	○	●	○	○	○
S	○	○		○	○	○	●
H	○				○	○	○
O	○	○	○		○		

1) uncoated
2) self-centering

→ v_c Page 44+45

Continued on next page

High-performance twist drills similar to DIN 1897, extra-short

≤ 3xD



UNI	UNI	N	VA	WNX	WT	WT
TiN	TiN	vap.			vap.	TiN

SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E
10 113 ...	**10 107 ...**	**10 105 ...**	**10 130 ...**	**10 106 ...**	**10 109 ...**	**10 110 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
7,94	5/16	79	37,0	24,34	**794** [2]	14,62	**794** [2]								
8,00		79	37,0	23,51	**080** [2]	14,22	**080** [2]	4,60	**080**	9,39	**080**	10,32	**080**	9,81	**08000**	12,66	**080**
8,05		79	37,0											32,38	**08050**		
8,10		79	37,0	30,07	**081** [2]	18,03	**081** [2]	7,80	**081**								
8,15		79	37,0											32,38	**08150**		
8,20		79	37,0	31,30	**082** [2]	18,72	**082** [2]	8,35	**082**							17,90	**082**
8,30		79	37,0	32,80	**083** [2]	19,68	**083** [2]	8,47	**083**								
8,40		79	37,0	31,43	**084** [2]	18,98	**084** [2]	8,68	**084**	10,38	**084**	17,35	**084**	24,45	**08400**	18,17	**084**
8,50		79	37,0	27,33	**085** [2]	16,52	**085** [2]	6,59	**085**	10,38	**085**	12,55	**085**	11,80	**08500**	15,15	**085**
8,55		84	40,0											37,01	**08550**		
8,60		84	40,0			18,46	**086** [2]	8,68	**086**	10,38	**086**						
8,70		84	40,0			21,17	**087** [2]	8,87	**087**	10,38	**087**					18,57	**087**
8,73	11/32	84	40,0	43,18	**873** [2]	25,96	**873** [2]										
8,80		84	40,0	34,30	**088** [2]	20,50	**088** [2]	8,96	**088**			20,50	**088**	27,46	**08800**	18,72	**088**
8,90		84	40,0			26,22	**089** [2]	9,32	**089**								
9,00		84	40,0	27,75	**090** [2]	16,80	**090** [2]	6,02	**090**	11,91	**090**	12,26	**090**	12,56	**09000**	15,31	**090**
9,10		84	40,0			22,14	**091** [2]	10,45	**091**								
9,20		84	40,0			22,26	**092** [2]	11,30	**092**	12,56	**092**	22,94	**092**	29,64	**09200**	24,34	**092**
9,30		84	40,0	31,43	**093** [2]	18,98	**093** [2]	11,78	**093**	12,56	**093**	15,84	**093**	31,14	**09300**	24,34	**093**
9,40		84	40,0			25,83	**094** [2]	11,98	**094**			15,84	**094**	31,55	**09400**	24,34	**094**
9,50		84	40,0	30,75	**095** [2]	18,46	**095** [2]	10,05	**095**	12,73	**095**	15,04	**095**	13,66	**09500**	20,09	**095**
9,60		89	43,0			27,07	**096** [2]	12,63	**096**			23,91	**096**	31,55	**09600**	25,27	**096**
9,65		89	43,0											35,93	**09650**		
9,70		89	43,0			26,22	**097** [2]	12,83	**097**			23,91	**097**	31,95	**09700**	25,27	**097**
9,75		89	43,0											35,93	**09750**		
9,80		89	43,0	36,60	**098** [2]	22,14	**098** [2]	13,52	**098**	13,92	**098**	24,34	**098**	32,38	**09800**	27,07	**098**
9,90		89	43,0			28,00	**099** [2]	13,52	**099**			25,15	**099**	32,80	**09900**	27,07	**099**
10,00		89	43,0	30,19	**100** [2]	18,17	**100** [2]	7,26	**100**	14,48	**100**	13,44	**100**	16,12	**10000**	18,72	**100**
10,10		89	43,0			27,07	**101** [2]	14,75	**101**								
10,20		89	43,0	38,25	**102** [2]	23,10	**102** [2]	12,83	**102**	14,48	**102**	23,91	**102**	25,15	**10200**	26,22	**102**
10,30		89	43,0			25,15	**103** [2]	15,73	**103**					40,56	**10300**		
10,40		89	43,0			29,38	**104** [2]	16,68	**104**								
10,50		89	43,0	36,35	**105** [2]	22,01	**105** [2]	13,52	**105**	15,57	**105**	19,96	**105**	28,00	**10500**	25,01	**105**
10,60		95	47,0					20,09	**106**								
10,70		95	47,0					20,65	**107**					48,23	**10700**		
10,80		95	47,0					21,17	**108**							56,16	**108**
10,90		95	47,0					21,17	**109**								
11,00		95	47,0	40,31	**110** [2]	24,03	**110** [2]	13,52	**110**	16,12	**110**	23,65	**110**	29,64	**11000**	25,01	**110**
11,10		95	47,0					21,17	**111**								
11,11	7/16	95	47,0	47,41	**111** [2]	28,56	**111** [2]										
11,20		95	47,0					22,26	**112**					56,97	**11200**		
11,30		95	47,0					22,69	**113**					60,25	**11300**		
11,40		95	47,0					22,69	**114**					60,67	**11400**		
11,50		95	47,0	46,46	**115** [2]	28,14	**115** [2]	14,22	**115**	18,46	**115**	30,75	**115**	33,33	**11500**	26,50	**115**
11,60		95	47,0					22,69	**116**								
11,70		95	47,0					22,69	**117**	19,96	**117**			60,67	**11700**		
11,75		95	47,0											66,00	**11750**		
11,80		95	47,0					23,36	**118**			38,25	**118**	60,67	**11800**	31,55	**118**

P	●	●	○	○	●	●	●
M		●		●		●	●
K	●	●	●		●	●	●
N	○	○	○	●	○	○	○
S	○	○		○	○	○	●
H	○				○	○	○
O	○	○	○		○		

1) uncoated
2) self-centering

→ v_c Page 44+45

Continued on next page

High-performance twist drills similar to DIN 1897, extra-short

≤ 3xD



UNI	UNI	N	VA	WNX	WT	WT
TiN	TiN	vap.			vap.	TiN

SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E	SIG 130° HSS-E
10 113 ...	**10 107 ...**	**10 105 ...**	**10 130 ...**	**10 106 ...**	**10 109 ...**	**10 110 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
11,90		102	51,0					23,65	**119**						
12,00		102	51,0	45,50	**120** [2]	27,46	**120** [2]	17,35	**120**	20,09	**120**	30,75	**120**	39,34	**12000**	30,75	**120**
12,10		102	51,0					24,19	**121**								
12,20		102	51,0					24,19	**122**								
12,30		102	51,0	77,05	**123** [2]	45,79	**123** [2]	24,45	**123**			38,25	**123**	46,59	**12300**	46,98	**123**
12,40		102	51,0					24,45	**124**								
12,50		102	51,0	49,86	**125** [2]	29,93	**125** [2]	18,03	**125**			31,30	**125**	40,16	**12500**	31,55	**125**
12,60		102	51,0					25,01	**126**								
12,70		102	51,0	63,67	**127** [2]	37,98	**127** [2]	23,91	**127**					41,25	**12700**		
12,80		102	51,0					25,96	**128**			46,86	**128**	61,20	**12800**	59,58	**128**
12,90		102	51,0					27,07	**129**								
13,00		102	51,0	49,86	**130** [2]	29,93	**130** [2]	18,31	**130**			34,57	**130**	42,62	**13000**	32,38	**130**
13,20		102	51,0					28,00	**132**								
13,30		107	54,0					28,42	**133**								
13,50		107	54,0	53,01	**135** [2]	31,95	**135** [2]	21,17	**135**			43,18	**135**	46,04	**13500**	35,26	**135**
13,80		107	54,0					29,24	**138**			55,76	**138**				
14,00		107	54,0	66,13	**140** [2]	39,90	**140** [2]	21,57	**140**			40,16	**140**	46,04	**14000**	36,60	**140**
14,50		111	56,0					23,91	**145**			50,83	**145**	57,78	**14500**	37,30	**145**
14,75		111	56,0					36,89	**147**								
15,00		111	56,0					23,65	**150**			47,16	**150**	55,20	**15000**	38,55	**150**
15,25		115	58,0					40,86	**152**								
15,50		115	58,0					25,69	**155**			71,86	**155**	70,37	**15500**	50,40	**155**
15,75		115	58,0													52,73	**157**
16,00		115	58,0					25,96	**160**			56,84	**160**	57,53	**16000**	49,73	**160**
16,50		119	60,0					31,03	**165**			58,34	**165**	93,05	**16500**	74,61	**165**
17,00		119	60,0					31,55	**170**			58,91	**170**	80,36	**17000**	72,01	**170**
17,50		123	62,0					32,80	**175**			60,40	**175**	93,86	**17500**	68,86	**175**
17,75		123	62,0													83,62	**177**
18,00		123	62,0					33,06	**180**			60,80	**180**	88,13	**18000**	78,70	**180**
18,50		127	64,0					36,49	**185**					112,20	**18500**	88,95	**185**
19,00		127	64,0					38,39	**190**			62,99	**190**	93,86	**19000**	86,78	**190**
19,50		131	66,0					40,86	**195**					109,60	**19500**	97,42	**195**
20,00		131	66,0					40,86	**200**			66,26	**200**	95,91	**20000**	92,90	**200**
20,50		136	68,0											153,10	**20500**		
21,00		136	68,0											147,60	**21000**		
21,50		141	70,0											157,20	**21500**		
22,00		141	70,0											158,50	**22000**		
23,00		146	72,0											176,40	**23000**		
24,00		151	75,0											187,30	**24000**		
25,00		151	75,0											214,60	**25000**		

P	●	●	○	○	●	●	●
M		●		●		●	●
K	●	●	●		●	●	●
N	○	○	○	●	○	○	○
S	○	○		○	○	○	●
H	○				○	○	○
O	○	○	○		○		

1) uncoated
2) self-centering

→ v_c Page 44+45

High-performance twist drill similar to DIN 338, short

- With shank to DIN 1835 A
- Special point thinning
- 4 facet
- Highest Performance
- Very good centering behaviour

≤ 5xD

VX

TiN



SIG 118°
HSS-E

DC h8 mm	OAL mm	LCF mm	DCONMS h6 mm	LS mm	10 124 ... EUR T2	
2,00	56	24	3	28	14,22	020
2,10	56	24	3	28	16,68	021
2,20	59	27	3	28	16,68	022
2,30	59	27	3	28	16,68	023
2,40	62	30	3	28	16,68	024
2,50	62	30	3	28	16,68	025
2,60	62	30	3	28	16,68	026
2,70	65	33	3	28	16,68	027
2,80	65	33	3	28	16,68	028
2,90	65	33	3	28	16,68	029
3,00	65	33	3	28	15,84	030
3,10	68	36	4	28	18,03	031
3,20	68	36	4	28	18,03	032
3,30	68	36	4	28	18,03	033
3,40	71	39	4	28	18,03	034
3,50	71	39	4	28	18,03	035
3,60	71	39	4	28	19,68	036
3,70	71	39	4	28	19,68	037
3,80	75	43	4	28	19,68	038
3,90	75	43	4	28	19,68	039
4,00	75	43	4	28	19,68	040
4,10	87	43	6	36	23,51	041
4,20	87	43	6	36	24,45	042
4,30	91	47	6	36	23,51	043
4,40	91	47	6	36	23,51	044
4,50	91	47	6	36	23,51	045
4,60	91	47	6	36	26,38	046
4,65	91	47	6	36	26,38	465
4,70	91	47	6	36	26,38	047
4,80	96	52	6	36	26,38	048
4,90	96	52	6	36	26,38	049
5,00	96	52	6	36	29,10	050
5,10	96	52	6	36	29,10	051
5,20	96	52	6	36	29,10	052
5,30	96	52	6	36	30,75	053
5,40	101	57	6	36	30,75	054
5,50	101	57	6	36	29,10	055
5,55	101	57	6	36	33,06	555
5,60	101	57	6	36	33,06	056
5,70	101	57	6	36	33,06	057
5,80	101	57	6	36	33,06	058
5,90	101	57	6	36	33,06	059
6,00	101	57	6	36	31,55	060
6,10	107	63	8	36	37,98	061
6,20	107	63	8	36	37,98	062
6,30	107	63	8	36	37,98	063
6,40	107	63	8	36	37,98	064
6,50	107	63	8	36	37,98	065
6,60	107	63	8	36	40,03	066
6,70	107	63	8	36	40,03	067
6,80	113	69	8	36	40,03	068
6,90	113	69	8	36	40,03	069
7,00	113	69	8	36	40,03	070
7,10	113	69	8	36	41,54	071
7,20	113	69	8	36	41,54	072
7,30	113	69	8	36	41,54	073
7,40	113	69	8	36	41,54	074
7,50	113	69	8	36	41,54	075
7,55	119	75	8	36	43,44	755
7,60	119	75	8	36	43,44	076
7,70	119	75	8	36	43,44	077
7,80	119	75	8	36	43,44	078
7,90	119	75	8	36	43,44	079
8,00	119	75	8	36	43,44	080
8,10	125	75	10	40	47,41	081
8,20	125	75	10	40	47,41	082
8,30	125	75	10	40	47,41	083
8,40	125	75	10	40	47,41	084
8,50	125	75	10	40	49,33	085
8,60	131	81	10	40	43,98	086
8,70	131	81	10	40	43,98	087
8,80	131	81	10	40	43,98	088
8,90	131	81	10	40	43,98	089
9,00	131	81	10	40	43,98	090
9,10	131	81	10	40	47,55	091
9,20	131	81	10	40	47,55	092
9,30	131	81	10	40	47,55	093
9,40	131	81	10	40	47,55	094
9,50	131	81	10	40	47,55	095
9,55	137	87	10	40	52,20	955
9,60	137	87	10	40	52,20	096
9,70	137	87	10	40	52,20	097
9,80	137	87	10	40	52,20	098
9,90	137	87	10	40	52,20	099
10,00	137	87	10	40	52,20	100
10,10	144	87	12	45	64,63	101
10,20	144	87	12	45	64,63	102
10,30	144	87	12	45	64,63	103
10,40	144	87	12	45	64,63	104
10,50	144	87	12	45	64,63	105
10,70	151	94	12	45	70,92	107
10,80	151	94	12	45	70,92	108
11,00	151	94	12	45	60,80	110
11,20	151	94	12	45	65,44	112
11,30	151	94	12	45	65,44	113
11,40	151	94	12	45	65,44	114
11,50	151	94	12	45	65,44	115
11,60	151	94	12	45	70,63	116
11,70	151	94	12	45	70,63	117
11,80	151	94	12	45	70,63	118
11,90	158	101	12	45	70,63	119
12,00	158	101	12	45	70,63	120
12,20	161	101	16	48	80,47	122
12,30	161	101	16	48	80,47	123
12,50	161	101	16	48	80,47	125
12,70	161	101	16	48	85,12	127
12,80	161	101	16	48	85,12	128
13,00	161	101	16	48	94,54	130
13,50	166	106	16	48	122,20	135
14,00	166	106	16	48	122,20	140
14,50	169	109	16	48	157,20	145
15,00	169	109	16	48	147,60	150
15,50	172	112	16	48	159,90	155
16,00	172	112	16	48	154,50	160
16,50	181	115	20	50	237,70	165
17,00	181	115	20	50	237,70	170
17,50	184	118	20	50	237,70	175
18,00	184	118	20	50	237,70	180
18,50	188	122	20	50	237,70	185
19,00	188	122	20	50	237,70	190
19,50	191	125	20	50	237,70	195
20,00	191	125	20	50	213,30	200

P	●
M	●
K	●
N	○
S	○
H	
O	○

→ v_c Page 46

Twist drill to DIN 338, short

≤ 5xD



	UNI	UNI	N	VA	W	WTL	WTL
	TiN	TiN	vap.			F.-nit	TiN
	SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS-E	SIG 130° HSS-E
	10 173 ...	10 171 ...	10 152 ...	10 175 ...	10 161 ...	10 168 ...	10 170 ...

DC h8 mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
0,20		19	2,5					5,84	00200 [1]			10,05	00200				
0,25		19	3,0					5,60	00250 [1]			15,04	00250				
0,30		19	3,0					4,15	00300 [1]			7,78	00300				
0,35		19	4,0					3,99	00350 [1]			7,21	00350				
0,40		20	5,0					3,37	00400 [1]			6,00	00400				
0,45		20	5,0					3,42	00450 [1]			6,28	00450				
0,50		22	6,0					2,87	00500 [1]			4,39	00500				
0,55		24	7,0					4,31	00550 [1]			7,67	00550				
0,60		24	7,0					2,74	00600 [1]			4,73	00600				
0,65		26	8,0					3,99	00650 [1]			7,67	00650				
0,70		28	9,0					2,47	00700 [1]			4,32	00700				
0,75		28	9,0					2,97	00750 [1]			4,45	00750				
0,80		30	10,0					2,36	00800 [1]			3,76	00800				
0,85		30	10,0					2,74	00850 [1]			4,35	00850				
0,90		32	11,0			3,85	009 [2]	2,24	00900 [1]			3,60	00900				
0,95		32	11,0					2,74	00950 [1]			4,35	00950				
1,00		34	12,0	8,09	010 [2]	3,85	010 [2]	2,19	01000 [1]	4,61	010	3,73	01000	3,90	010 [1]	8,58	010
1,05		34	12,0					2,40	01050 [1]			4,25	01050				
1,10		36	14,0	8,74	011 [2]	4,22	011 [2]	2,12	01100 [1]	4,71	011	3,50	01100	4,32	011 [1]	9,60	011
1,15		36	14,0					2,47	01150 [1]			3,95	01150				
1,20		38	16,0	8,58	012 [2]	4,13	012 [2]	2,19	01200 [1]	5,22	012	3,50	01200	4,32	012 [1]	9,60	012
1,25		38	16,0			4,22	125 [2]	2,40	01250 [1]			3,85	01250				
1,30		38	16,0	8,74	013 [2]	4,22	013 [2]	2,04	01300 [1]	4,97	013	3,50	01300	4,25	013 [1]	9,33	013
1,35		40	18,0					2,30	01350 [1]			3,95	01350				
1,40		40	18,0	8,83	014 [2]	4,24	014 [2]	2,01	01400 [1]	4,69	014	3,50	01400	4,32	014 [1]	9,60	014
1,45		40	18,0			3,99	145 [2]	2,12	01450 [1]			3,90	01450			8,31	901
1,50		40	18,0	8,33	015 [2]	3,99	015 [2]	1,80	01500 [1]	4,32	015	3,50	01500	3,87	015 [1]	8,48	015
1,55		43	20,0			3,99	155 [2]	2,01	01550 [1]			3,90	01550			8,36	902
1,60		43	20,0	8,33	016 [2]	3,99	016 [2]	1,75	01600 [1]	4,69	016	3,11	01600	3,90	016 [1]	8,58	016
1,65		43	20,0			4,28	165 [2]	2,01	01650 [1]			3,90	01650			14,75	903
1,70		43	20,0	8,95	017 [2]	4,28	017 [2]	1,75	01700 [1]	4,84	017	3,26	01700	3,90	017 [1]	8,58	017
1,75		46	22,0					2,01	01750 [1]			3,76	01750				
1,80		46	22,0	8,83	018 [2]	4,24	018 [2]	1,54	01800 [1]	4,69	018	3,20	01800	3,90	018 [1]	8,58	018
1,85		46	22,0					1,87	01850 [1]			3,76	01850			10,16	904
1,90		46	22,0	8,83	019 [2]	4,24	019 [2]	1,60	01900 [1]	4,84	019	3,20	01900	3,90	019 [1]	8,58	019
1,95		49	24,0					1,87	01950 [1]			3,60	01950				
2,00		49	24,0	8,58	020 [2]	4,13	020 [2]	1,31	02000 [1]	3,93	020	2,58	02000	3,51	020 [1]	7,67	020
2,05		49	24,0					1,80	02050 [1]			3,39	02050			11,03	905
2,10		49	24,0	8,95	021 [2]	4,28	021 [2]	1,54	02100 [1]	5,16	021	2,97	02100	3,84	021 [1]	8,36	021
2,15		53	27,0					1,87	02150 [1]			3,39	02150				
2,20		53	27,0	9,43	022 [2]	4,48	022 [2]	1,60	02200 [1]	5,16	022	2,97	02200	3,84	022 [1]	8,36	022
2,25		53	27,0					1,87	02250 [1]			3,31	02250				
2,30		53	27,0	9,14	023 [2]	4,38	023 [2]	1,60	02300 [1]	5,16	023	2,97	02300	3,84	023 [1]	8,36	023
2,35		53	27,0					2,61	02350 [1]			4,03	02350				
2,38	3/32	57	30,0	9,14	238 [2]	4,38	238 [2]										
2,40		57	30,0	8,58	024 [2]	4,13	024 [2]	1,69	02400	5,18	024	3,11	02400	3,84	024	8,36	024

P	●	●	○	○		●	●
M		●		●		○	○
K	●	●	●			●	●
N	○	○	○	●	●	●	○
S	○	○		○		○	○
H	○					○	○
O	○	○	○			○	○

1) uncoated
2) self-centering

→ v_c Page 46+47

Continued on next page

Twist drill to DIN 338, short

≤ 5xD



UNI	UNI	N	VA	W	WTL	WTL
TiN	TiN	vap.			F.-nit	TiN

SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS-E	SIG 130° HSS-E
10 173 ...	**10 171 ...**	**10 152 ...**	**10 175 ...**	**10 161 ...**	**10 168 ...**	**10 170 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
2,45		57	30,0					2,61	02450			4,13	02450		
2,50		57	30,0	8,74	025 [2]	4,22	025 [2]	1,69	02500	4,15	025	2,63	02500	3,54	025	7,85	025
2,55		57	30,0			4,38	255 [2]	2,66	02550			4,76	02550				
2,60		57	30,0	9,14	026 [2]	4,38	026 [2]	1,75	02600	5,28	026	3,20	02600	3,84	026	8,36	026
2,65		57	30,0					2,87	02650			4,76	02650				
2,70		61	33,0	9,68	027 [2]	4,63	027 [2]	1,75	02700	5,28	027	3,29	02700	4,05	027	9,15	027
2,75		61	33,0					2,24	02750			4,62	02750				
2,78	7/64	61	33,0	11,79	278 [2]	5,64	278 [2]										
2,80		61	33,0	9,51	028 [2]	4,52	028 [2]	1,75	02800	5,43	028	3,60	02800	4,25	028	9,33	028
2,85		61	33,0					2,66	02850			5,60	02850				
2,90		61	33,0	9,68	029 [2]	4,63	029 [2]	1,75	02900	5,43	029	3,60	02900	4,25	029	9,33	029
2,95		61	33,0					2,24	02950			4,76	02950				
3,00		61	33,0	9,27	030 [2]	4,43	030 [2]	1,46	03000	4,15	030	2,90	03000	3,76	030	8,31	030
3,05		65	36,0					2,04	03050			4,03	03050				
3,10		65	36,0	10,26	031 [2]	4,91	031 [2]	1,87	03100	5,48	031	3,60	03100	4,05	031	9,15	031
3,15		65	36,0					2,04	03150			4,03	03150				
3,17	1/8	65	36,0	10,19	317 [2]	4,89	317 [2]										
3,20		65	36,0	10,07	032 [2]	4,69	032 [2]	1,87	03200	4,69	032	3,26	03200	4,32	032	9,60	032
3,25		65	36,0			4,91	325 [2]	2,12	03250			4,03	03250				
3,30		65	36,0	10,26	033 [2]	4,76	033 [2]	1,87	03300	4,71	033	3,29	03300	4,42	033	9,74	033
3,35		65	36,0					2,24	03350			4,13	03350				
3,40		70	39,0	11,01	034 [2]	5,27	034 [2]	1,87	03400	5,76	034	3,64	03400	4,94	034	10,84	034
3,45		70	39,0					2,30	03450			4,35	03450				
3,50		70	39,0	11,11	035 [2]	5,33	035 [2]	1,69	03500	4,61	035	3,37	03500	4,05	035	9,15	035
3,55		70	39,0					2,40	03550			4,35	03550				
3,57	9/64	70	39,0	11,11	357 [2]	5,33	357 [2]										
3,60		70	39,0	11,26	036 [2]	5,41	036 [2]	2,01	03600	6,00	036	3,64	03600	4,73	036	10,68	036
3,65		70	39,0					2,40	03650			4,15	03650				
3,70		70	39,0	11,26	037 [2]	5,41	037 [2]	2,12	03700	6,02	037	3,73	03700	4,97	037	10,84	037
3,75		70	39,0					2,47	03750			4,55	03750				
3,80		75	43,0	11,85	038 [2]	5,66	038 [2]	2,19	03800	6,12	038	4,03	03800	5,26	038	11,72	038
3,85		75	43,0					2,61	03850			4,58	03850				
3,90		75	43,0	12,12	039 [2]	5,76	039 [2]	2,30	03900	6,38	039	4,03	03900	5,60	039	12,16	039
3,95		75	43,0					2,74	03950			4,62	03950				
3,97	5/32	75	43,0	12,31	397 [2]	5,91	397 [2]										
4,00		75	43,0	11,61	040 [2]	5,57	040 [2]	1,75	04000	5,03	040	3,42	04000	4,45	040	9,95	040
4,05		75	43,0					2,87	04050			6,00	04050				
4,10		75	43,0	11,85	041 [2]	5,66	041 [2]	2,40	04100	6,38	041	4,03	04100	5,57	041	12,16	041
4,15		75	43,0					2,87	04150			6,00	04150				
4,20		75	43,0	11,85	042 [2]	5,66	042 [2]	2,12	04200	6,45	042	3,60	04200	5,21	042	11,54	042
4,25		75	43,0			6,07	425 [2]	2,97	04250			5,84	04250				
4,30		80	47,0	12,68	043 [2]	6,07	043 [2]	2,47	04300	6,45	043	4,98	04300	5,76	043	12,82	043
4,35		80	47,0					3,79	04350			7,18	04350				
4,37	11/64	80	47,0	12,81	437 [2]	6,13	437 [2]										
4,40		80	47,0	12,68	044 [2]	6,07	044 [2]	2,47	04400	6,56	044	4,98	04400	5,76	044	12,82	044
4,45		80	47,0					3,79	04450								

P	●	●	○	○		●	●
M		●		●		○	○
K	●	●	●			●	●
N	○	○	○	●	●	●	○
S	○	○		○		○	○
H	○					○	○
O	○	○	○			○	○

1) uncoated
2) self-centering

→ v_c Page 46+47

Continued on next page

Twist drill to DIN 338, short

≤ 5xD



UNI	UNI	N	VA	W	WTL	WTL
TiN	TiN	vap.			F.-nit	TiN

SIG 130°	SIG 118°	SIG 118°	SIG 130°	SIG 130°	SIG 130°	SIG 130°
HSS-E-PM	HSS-E	HSS	HSS-E	HSS	HSS-E	HSS-E
10 173 ...	**10 171 ...**	**10 152 ...**	**10 175 ...**	**10 161 ...**	**10 168 ...**	**10 170 ...**

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
4,50		80	47,0	12,31	**045** [2]	5,91	**045** [2]	2,24	**04500**	6,41	**045**	4,35	**04500**	5,33	**045**	11,54	**045**
4,55		80	47,0					3,79	**04550**			8,73	**04550**				
4,60		80	47,0	13,04	**046** [2]	6,26	**046** [2]	2,47	**04600**	6,81	**046**	4,98	**04600**	6,07	**046**	13,65	**046**
4,65		80	47,0			6,26	**465** [2]	3,79	**04650**			8,73	**04650**				
4,70		80	47,0	15,84	**047** [2]	7,58	**047** [2]	2,61	**04700**	6,90	**047**	4,98	**04700**	6,07	**047**	13,65	**047**
4,75		80	47,0					3,79	**04750**			6,98	**04750**				
4,76	3/16	86	52,0	13,37	**476** [2]	6,38	**476** [2]										
4,80		86	52,0	13,37	**048** [2]	6,38	**048** [2]	2,61	**04800**	6,96	**048**	4,98	**04800**	6,07	**048**	13,65	**048**
4,85		86	52,0					3,45	**04850**			8,73	**04850**				
4,90		86	52,0	13,55	**049** [2]	6,48	**049** [2]	2,74	**04900**	7,21	**049**	4,98	**04900**	6,33	**049**	13,92	**049**
4,95		86	52,0			6,32	**495** [2]	4,25	**04950**			8,73	**04950**				
5,00		86	52,0	13,66	**050** [2]	6,55	**050** [2]	2,19	**05000**	6,12	**050**	4,73	**05000**	5,63	**050**	12,37	**050**
5,05		86	52,0			6,55	**505** [2]	4,39	**05050**			10,51	**05050**				
5,10		86	52,0	13,66	**051** [2]	6,55	**051** [2]	2,87	**05100**	7,21	**051**	5,25	**05100**	6,33	**051**		
5,15		86	52,0					4,60	**05150**								
5,16	13/64	86	52,0	14,90	**516** [2]	7,15	**516** [2]										
5,20		86	52,0	14,08	**052** [2]	6,73	**052** [2]	2,87	**05200**	7,28	**052**	5,42	**05200**	6,55	**052**	14,75	**052**
5,25		86	52,0					4,39	**05250**			8,36	**05250**				
5,30		86	52,0	14,90	**053** [2]	7,15	**053** [2]	2,87	**05300**	7,43	**053**	5,42	**05300**				
5,35		93	57,0					5,22	**05350**								
5,40		93	57,0	18,31	**054** [2]	8,72	**054** [2]	3,16	**05400**			5,78	**05400**				
5,45		93	57,0					5,42	**05450**			7,18	**05450**				
5,50		93	57,0	15,84	**055** [2]	7,51	**055** [2]	3,05	**05500**	8,70	**055**	5,29	**05500**	6,55	**055**	14,62	**055**
5,55		93	57,0			8,84	**555** [2]	5,42	**05550**			7,18	**05550**				
5,56	7/32	93	57,0	18,57	**556** [2]	8,84	**556** [2]										
5,60		93	57,0	16,80	**056** [2]	8,01	**056** [2]	3,26	**05600**	8,33	**056**	6,38	**05600**	7,19	**056**	16,28	**056**
5,65		93	57,0					5,60	**05650**			9,90	**05650**				
5,70		93	57,0	16,52	**057** [2]	7,93	**057** [2]	3,29	**05700**	8,33	**057**	6,38	**05700**	7,19	**057**	16,28	**057**
5,75		93	57,0			7,93	**575** [2]	5,60	**05750**			9,73	**05750**				
5,80		93	57,0	16,52	**058** [2]	7,93	**058** [2]	3,37	**05800**	8,33	**058**	6,38	**05800**	7,27	**058**	16,39	**058**
5,85		93	57,0					5,60	**05850**			11,69	**05850**				
5,90		93	57,0	17,63	**059** [2]	8,44	**059** [2]	3,42	**05900**	8,33	**059**	6,38	**05900**	7,83	**059**	17,63	**059**
5,95	15/64	93	57,0	21,57	**595** [2]	10,33	**595** [2]	3,45	**05950**			6,38	**05950**				
6,00		93	57,0	15,99	**060** [2]	7,63	**060** [2]	3,05	**06000**	7,98	**060**	6,28	**06000**	7,25	**060**	17,35	**060**
6,05		101	63,0					6,08	**06050**			13,66	**06050**				
6,10		101	63,0	18,03	**061** [2]	8,61	**061** [2]	3,73	**06100**			6,38	**06100**				
6,15		101	63,0					6,08	**06150**			10,51	**06150**				
6,20		101	63,0	17,77	**062** [2]	8,48	**062** [2]	3,73	**06200**	9,31	**062**	6,38	**06200**			18,31	**062**
6,25		101	63,0					6,08	**06250**			10,93	**06250**				
6,30		101	63,0	19,68	**063** [2]	9,40	**063** [2]	3,79	**06300**			6,75	**06300**				
6,35	1/4	101	63,0	20,76	**635** [2]	9,92	**635** [2]	4,03	**06350**			6,48	**06350**				
6,40		101	63,0	20,76	**064** [2]	9,95	**064** [2]	3,99	**06400**			6,75	**06400**				
6,45		101	63,0					6,90	**06450**								
6,50		101	63,0	19,27	**065** [2]	9,18	**065** [2]	3,79	**06500**	9,15	**065**	6,46	**06500**	7,92	**065**	17,77	**065**
6,55		101	63,0					7,21	**06550**			14,75	**06550**				
6,60		101	63,0	21,04	**066** [2]	10,07	**066** [2]	4,15	**06600**			7,75	**06600**				

P				●		●		○		○					●		●
M						●				●					○		○
K				●		●		●							●		●
N				○		○		○		●		●			●		○
S				○		○				○					○		○
H				○											○		○
O				○		○		○							○		○

1) uncoated
2) self-centering

→ v_c Page 46+47

Continued on next page

Twist drill to DIN 338, short

≤ 5xD



	UNI	UNI	N	VA	W	WTL	WTL
	TiN	TiN	vap.			F.-nit	TiN
	SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS-E	SIG 130° HSS-E
	10 173 ...	10 171 ...	10 152 ...	10 175 ...	10 161 ...	10 168 ...	10 170 ...

DC $_{h8}$ mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
6,65		101	63,0					7,32	06650			14,22	06650				
6,70		101	63,0	21,04	067 2)	10,04	067 2)	4,31	06700			7,80	06700				
6,75		109	69,0	28,42	675 2)	13,57	675 2)	5,03	06750			8,36	06750				
6,80		109	69,0	21,57	068 2)	10,33	068 2)	4,98	06800	11,03	068	8,36	06800	9,74	068	20,91	068
6,85		109	69,0					8,22	06850			14,75	06850				
6,90		109	69,0	22,01	069 2)	10,50	069 2)	4,98	06900	11,03	069	8,36	06900				
6,95		109	69,0					8,34	06950			14,75	06950				
7,00		109	69,0	21,57	070 2)	10,33	070 2)	4,60	07000	9,52	070	7,41	07000	8,66	070	19,15	070
7,05		109	69,0					8,90	07050			11,92	07050				
7,10		109	69,0	24,87	071 2)	11,88	071 2)	5,03	07100			10,28	07100				
7,14	9/32	109	69,0	37,17	714 2)	17,77	714 2)										
7,15		109	69,0					8,48	07150								
7,20		109	69,0	24,73	072 2)	11,84	072 2)	5,22	07200	13,03	072	10,28	07200	13,43	072	29,53	072
7,25		109	69,0					8,22	07250			17,49	07250				
7,30		109	69,0	25,69	073 2)	12,29	073 2)	5,22	07300			10,28	07300				
7,35		109	69,0					8,90	07350								
7,40		109	69,0	25,15	074 2)	12,02	074 2)	5,46	07400	13,03	074	10,28	07400	13,43	074	29,53	074
7,45		109	69,0			10,94	745 2)	8,73	07450								
7,50		109	69,0	22,82	075 2)	10,94	075 2)	4,98	07500	10,36	075	8,51	07500	9,95	075	22,26	075
7,55		117	75,0					10,16	07550								
7,60		117	75,0	27,75	076 2)	13,28	076 2)	5,71	07600	15,73	076	11,30	07600	14,75	076	32,52	076
7,65		117	75,0					10,16	07650								
7,70		117	75,0	31,55	077 2)	15,15	077 2)	5,71	07700	15,73	077	11,30	07700	14,75	077	32,52	077
7,75		117	75,0					9,28	07750			19,80	07750				
7,80		117	75,0	27,07	078 2)	12,95	078 2)	5,84	07800	15,73	078	11,30	07800	14,75	078	32,52	078
7,85		117	75,0					10,16	07850								
7,90		117	75,0	32,38	079 2)	15,44	079 2)	5,91	07900	15,73	079	13,07	07900	14,75	079	32,52	079
7,94	5/16	117	75,0	29,10	794 2)	13,92	794 2)										
7,95		117	75,0					10,64	07950								
8,00		117	75,0	25,83	080 2)	12,35	080 2)	4,98	08000	12,73	080	9,51	08000	11,26	080	25,15	080
8,05		117	75,0					10,84	08050			25,01	08050				
8,10		117	75,0	28,14	081 2)	13,49	081 2)	6,08	08100			13,55	08100				
8,15		117	75,0					11,01	08150			25,01	08150				
8,20		117	75,0	27,75	082 2)	13,28	082 2)	6,28	08200			14,22	08200				
8,25		117	75,0					7,65	08250			20,50	08250				
8,30		117	75,0	30,87	083 2)	14,75	083 2)	6,81	08300			14,90	08300				
8,35		117	75,0					11,63	08350								
8,40		117	75,0	31,03	084 2)	14,75	084 2)	6,81	08400	17,63	084	14,90	08400	17,63	084	38,25	084
8,45		117	75,0					12,27	08450			23,76	08450				
8,50		117	75,0	26,50	085 2)	12,71	085 2)	6,46	08500	12,45	085	10,93	08500	12,82	085	28,28	085
8,55		125	81,0					14,34	08550			24,45	08550				
8,60		125	81,0			22,26	086 2)	7,39	08600	18,46	086	14,90	08600			42,36	086
8,65		125	81,0					14,34	08650								
8,70		125	81,0			22,26	087 2)	7,39	08700			16,68	08700				
8,73	11/32	125	81,0	28,70	873 2)	13,66	873 2)										
8,75		125	81,0					12,80	08750			23,76	08750				

P	●	●	○	○		●	●
M		●		●		○	○
K	●	●	●			●	●
N	○	○	○	●	●	●	○
S	○	○		○		○	○
H	○					○	○
O	○	○	○			○	○

1) uncoated
2) self-centering

→ v_c Page 46+47

Continued on next page

Twist drill to DIN 338, short

≤ 5xD



	UNI	UNI	N	VA	W	WTL	WTL
	TiN	TiN	vap.			F.-nit	TiN
	SIG 130° HSS-E-PM	SIG 118° HSS-E	SIG 118° HSS	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS-E	SIG 130° HSS-E
	10 173 ...	10 171 ...	10 152 ...	10 175 ...	10 161 ...	10 168 ...	10 170 ...

DC h8 mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
8,80		125	81,0	31,03	088 2)	14,75	088 2)	7,65	08800	20,09	088	16,68	08800	19,68	088	43,03	088
8,90		125	81,0			20,65	089 2)	7,99	08900			16,80	08900				
8,95		125	81,0					14,90	08950								
9,00		125	81,0	29,24	090 2)	13,92	090 2)	7,05	09000	16,28	090	11,92	09000	15,04	090	32,93	090
9,05		125	81,0					14,90	09050								
9,10		125	81,0			22,94	091 2)	7,99	09100			18,46	09100				
9,15		125	81,0					14,90	09150								
9,20		125	81,0			22,94	092 2)	7,99	09200	23,65	092	18,46	09200	22,82	092	50,01	092
9,25		125	81,0					10,64	09250			28,56	09250				
9,30		125	81,0	33,61	093 2)	16,12	093 2)	8,13	09300	24,34	093	18,46	09300	22,82	093	49,33	093
9,35		125	81,0			14,62	935 2)	15,84	09350								
9,40		125	81,0			23,51	094 2)	8,13	09400	26,10	094	18,46	09400	22,82	094	49,33	094
9,45		125	81,0					15,84	09450								
9,50		125	81,0	30,75	095 2)	14,62	095 2)	8,03	09500	19,15	095	13,92	09500	16,28	095	35,12	095
9,55		133	87,0					18,03	09550								
9,60		133	87,0			17,49	096 2)	8,90	09600	27,46	096	20,91	09600	23,76	096	52,59	096
9,65		133	87,0					18,03	09650								
9,70		133	87,0			25,27	097 2)	8,90	09700	27,46	097	21,45	09700	25,96	097	56,16	097
9,75		133	87,0					11,63	09750								
9,80		133	87,0	36,60	098 2)	17,49	098 2)	9,92	09800	27,46	098	21,45	09800	25,96	098	56,16	098
9,85		133	87,0					19,53	09850								
9,90		133	87,0			20,76	099 2)	9,92	09900	27,46	099	22,01	09900	25,96	099	56,16	099
9,95		133	87,0					19,53	09950								
10,00		133	87,0	34,71	100 2)	16,52	100 2)	8,48	10000	18,31	100	14,75	10000	18,31	100	40,45	100
10,05		133	87,0					26,22	10050			37,30	10050				
10,10		133	87,0			23,65	101 2)	10,64	10100			22,26	10100				
10,15		133	87,0					26,22	10150								
10,20		133	87,0	40,03	102 2)	19,15	102 2)	10,84	10200	26,10	102	22,26	10200	25,15	102	54,65	102
10,25		133	87,0					14,62	10250			25,01	10250				
10,30		133	87,0			20,65	103 2)	13,08	10300	40,98	103	22,26	10300	33,61	103	72,96	103
10,35		133	87,0					26,22	10350								
10,40		133	87,0			25,54	104 2)	13,08	10400			22,26	10400				
10,45		133	87,0					26,22	10450								
10,50		133	87,0	40,31	105 2)	19,27	105 2)	11,01	10500	27,07	105	18,17	10500	23,10	105	50,83	105
10,55		133	87,0			19,96	955 2)	18,46	10550								
10,60		133	87,0					13,80	10600			22,26	10600				
10,70		142	94,0					15,84	10700	53,98	107	25,27	10700	35,52	107		
10,75		142	94,0					17,63	10750			29,38	10750				
10,80		142	94,0					15,44	10800			26,38	10800				
10,90		142	94,0					16,68	10900			26,38	10900				
11,00		142	94,0	41,67	110 2)	19,96	110 2)	12,80	11000	29,38	110	21,45	11000	28,28	110	60,80	110
11,10		142	94,0					16,68	11100			26,38	11100				
11,11	7/16	142	94,0	52,20	111 2)	25,01	111 2)										
11,20		142	94,0			22,14	112 2)	15,84	11200	57,10	112	33,76	11200	46,46	112	103,40	112
11,30		142	94,0			22,14	113 2)			57,53	113			46,46	113		
11,40		142	94,0			22,14	114 2)	17,21	11400	57,53	114	37,30	11400	46,46	114		

P	●	●	○	○		●	●
M		●		●		○	○
K	●	●	●			●	●
N	○	○	○	●	●	●	○
S	○	○		○		○	○
H	○					○	○
O	○	○	○			○	○

1) uncoated
2) self-centering

→ v_c Page 46+47

Continued on next page

Twist drill to DIN 338, short

≤ 5xD



	UNI	UNI	N	VA	W	WTL	WTL
	TiN	TiN	vap.			F.-nit	TiN
	SIG 130°	SIG 118°	SIG 118°	SIG 130°	SIG 130°	SIG 130°	SIG 130°
	HSS-E-PM	HSS-E	HSS	HSS-E	HSS	HSS-E	HSS-E
	10 173 ...	10 171 ...	10 152 ...	10 175 ...	10 161 ...	10 168 ...	10 170 ...

DC h8 mm	DC inch	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2		EUR T2		EUR T2	
11,50		142	94,0	46,17	115 2)	22,14	115 2)	13,80	11500	37,70	115	24,03	11500	32,93	115	72,68	115
11,60		142	94,0			23,65	116 2)	17,21	11600	65,86	116	37,30	11600	46,46	116		
11,70		142	94,0					17,63	11700	65,86	117	37,30	11700	46,46	117	103,40	117
11,80		142	94,0					17,90	11800	65,86	118	37,30	11800	49,33	118	108,40	118
11,90		151	101,0					19,53	11900	65,86	119	37,30	11900				
12,00		151	101,0	49,46	120 2)	23,65	120 2)	15,44	12000	42,49	120	26,10	12000	35,12	120	76,80	120
12,15		151	101,0			24,59	121 2)										
12,20		151	101,0					20,65	12200			44,39	12200				
12,25		151	101,0					23,10	12250								
12,30		151	101,0	88,67	123 2)	42,36	123 2)										
12,50		151	101,0	51,38	125 2)	24,59	925 2)	17,49	12500			26,10	12500	43,44	125	95,78	125
12,70		151	101,0	67,21	127 2)	32,12	127 2)	19,40	12700			25,27	12700				
12,80		151	101,0					23,36	12800			46,73	12800	73,64	128	161,20	128
13,00		151	101,0	54,65	130 2)	26,10	130 2)	19,15	13000			31,03	13000	43,44	130	94,83	130
13,10		151	101,0			46,46	131 2)										
13,20		151	101,0					25,01	13200			57,10	13200				
13,30		160	108,0			46,46	133 2)										
13,50		160	108,0	97,16	135 2)	46,46	135 2)	22,14	13500			38,39	13500	57,26	135	125,20	135
13,80		160	108,0					31,84	13800			71,86	13800	65,17	138	143,40	138
14,00		160	108,0	66,13	140 2)	31,71	140 2)	24,45	14000			37,01	14000	51,52	140	111,10	140
14,50		169	114,0					26,22	14500			48,92	14500	62,59	145	136,50	145
14,80		169	114,0											94,83	148		
15,00		169	114,0					28,56	15000			43,60	15000	64,35	150	140,80	150
15,25		178	120,0					53,01	15250								
15,50		178	120,0					31,03	15500			61,62	15500	93,86	155	203,50	155
15,80		178	120,0					51,09	15800								
16,00		178	120,0					33,33	16000			58,34	16000	78,82	160	174,90	160
16,50		184	125,0					38,13	16500			97,56	16500				
17,00		184	125,0					40,31	17000			98,93	17000				
17,50		191	130,0					43,98	17500			196,80	17500				
18,00		191	130,0					46,86	18000			107,10	18000				
18,50		198	135,0					51,09	18500								
19,00		198	135,0					55,20	19000			122,00	19000				
19,50		205	140,0					58,34	19500								
20,00		205	140,0					63,96	20000			151,60	20000				

P	●	●	○	○		●	●
M		●		●		○	○
K	●	●	●			●	●
N	○	○	○	●	●	●	○
S	○	○		○		○	○
H	○					○	○
O	○	○	○			○	○

1) uncoated
2) self-centering

→ v_c Page 46+47

Twist drill sets DIN 338, short

▲ In a box
▲ In 0.1 mm steps

≤ 5xD

	N	UNI
	vap.	TiN
	Drill set type N	Drill set type UNI TiN
	HSS	HSS-E
	10 158 ...	10 158 ...
DC h8 mm	EUR T2	EUR T2
1,0 - 5,9	115,70 050	344,40 054 1)
6,0 - 10,0	254,10 100	542,40 104 1)
P	○	●
M		●
K	●	●
N	○	○
S		○
H		
O	○	○

1) self-centering

→ v_c Page 46

Set of type N vap. contains the drills of Art. No. 10 152 ...
Set of type UNI TiN contains the drills of Art. No. 10 171 ...

Twist drills with coolant hole, factory standard, long

≤ 10xD

NC

TiAlN



SIG 130°
HSS

DC h8 mm	OAL mm	LCF mm	10 224 ... EUR T2	
3,0	100	66	153,10	030
3,3	106	69	173,50	033
3,5	112	73	170,90	035
3,8	119	78	209,00	038
4,0	119	78	173,50	040
4,2	119	78	176,40	042
4,5	126	82	174,90	045
4,8	132	87	206,40	048
5,0	132	87	176,40	050
5,5	139	91	181,60	055
5,8	139	91	209,00	058
6,0	139	91	187,30	060
6,5	148	97	200,90	065
6,8	156	102	202,20	068
7,0	156	102	202,20	070
7,5	156	102	209,00	075
7,8	165	109	224,10	078
8,0	165	109	213,30	080
8,5	165	109	224,10	085
8,8	175	115	229,60	088
9,0	175	115	229,60	090
9,5	175	115	236,50	095
9,8	184	121	241,80	098
10,0	184	121	236,50	100
10,2	184	121	241,80	102
10,5	184	121	243,30	105
10,8	195	128	250,10	108
11,0	195	128	243,30	110
11,5	195	128	248,70	115
11,8	205	134	289,50	118
12,0	205	134	254,10	120
12,8	205	134	304,70	128
13,0	205	134	266,50	130

P	○
M	○
K	●
N	○
S	
H	
O	○

→ v_c Page 48

Twist drills, DIN 340, long

≤ 10xD



	UNI	WTL	WTL	WTW
	TiN	F.-nit	TiN	
	SIG 118° HSS-E	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS
DC h8 mm / OAL mm / LCF mm	10 270 ...	10 225 ...	10 210 ...	10 200 ...
	EUR T2	EUR T2	EUR T2	EUR T2
1,0 / 56 / 33	6,90 010	9,95 010 1)	16,80 010	7,19 010
1,1 / 60 / 37	7,78 011	12,37 011 1)	17,90 011	7,83 011
1,2 / 65 / 41	8,63 012	11,72 012 1)		7,34 012
1,3 / 65 / 41	8,49 013	11,54 013 1)		
1,4 / 70 / 45	8,39 014	11,03 014 1)		6,47 014
1,5 / 70 / 45	7,26 015	9,60 015 1)	13,80 015	6,49 015
1,6 / 76 / 50	8,63 016	10,68 016 1)	13,43 016	5,97 016
1,7 / 76 / 50	9,39 017	10,40 017 1)		
1,8 / 80 / 53	9,02 018	10,40 018 1)		5,86 018
1,9 / 80 / 53	9,64 019	9,74 019 1)	12,83 019	5,84 019
2,0 / 85 / 56	7,16 020	7,41 020 1)	12,26 020	4,79 020
2,1 / 85 / 56	8,25 021	9,15 021 1)	14,08 021	5,74 021
2,2 / 90 / 59	8,39 022	9,33 022 1)		
2,3 / 90 / 59	8,25 023	9,33 023 1)	14,48 023	5,86 023
2,4 / 95 / 62	7,65 024	9,60 024	14,90 024	5,86 024
2,5 / 95 / 62	7,26 025	7,89 025	12,83 025	5,21 025
2,6 / 95 / 62	8,39 026	9,60 026	14,90 026	5,86 026
2,7 / 100 / 66	8,90 027	9,74 027	15,04 027	5,86 027
2,8 / 100 / 66	8,49 028	9,74 028	15,04 028	5,86 028
2,9 / 100 / 66	8,90 029	9,74 029	15,31 029	5,86 029
3,0 / 100 / 66	7,89 030	8,31 030	13,01 030	5,44 030
3,1 / 106 / 69	9,39 031	9,95 031		
3,2 / 106 / 69	8,78 032	9,74 032		
3,3 / 106 / 69	9,28 033	10,68 033	16,39 033	6,55 033
3,4 / 112 / 73	9,64 034	10,16 034		
3,5 / 112 / 73	9,39 035	9,74 035	14,90 035	6,14 035
3,6 / 112 / 73	9,77 036	10,40 036	18,72 036	7,51 036
3,7 / 112 / 73	9,52 037	10,40 037	17,90 037	7,74 037
3,8 / 119 / 78	9,15 038	10,68 038	17,90 038	7,83 038
3,9 / 119 / 78	10,27 039	10,84 039	18,17 039	7,97 039
4,0 / 119 / 78	10,02 040	10,40 040	16,12 040	6,70 040
4,1 / 119 / 78	10,14 041	11,03 041		
4,2 / 119 / 78	9,77 042	11,54 042	17,90 042	7,16 042
4,3 / 126 / 82	10,87 043	11,72 043	20,35 043	9,15 043
4,4 / 126 / 82	9,64 044	11,96 044		
4,5 / 126 / 82	10,27 045	12,37 045	18,46 045	8,23 045
4,6 / 126 / 82	9,88 046	12,16 046	21,33 046	9,33 046
4,7 / 126 / 82	11,37 047	12,82 047	21,33 047	9,60 047
4,8 / 132 / 87	11,13 048	13,65 048	21,33 048	9,74 048
4,9 / 132 / 87	11,29 049	14,22 049	22,14 049	9,95 049
5,0 / 132 / 87	11,37 050	12,37 050	19,53 050	7,85 050
5,1 / 132 / 87	12,65 051	14,62 051		

P	●	●	○	
M	●	○		
K	●	●	●	
N	○	●	○	●
S	○	○		
H		○		
O	○	○	○	

1) uncoated

→ v_c Page 48+49

Continued on next page

Twist drills, DIN 340, long

≤ 10xD



	UNI	WTL	WTL	WTW
	TiN	F.-nit	TiN	
	SIG 118° HSS-E	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS
	10 270 ...	**10 225 ...**	**10 210 ...**	**10 200 ...**

DC h8 mm	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2	
5,2	132	87	12,39	052	15,04	052	24,03	052	10,68	052
5,3	132	87	13,65	053	15,31	053	24,34	053	10,84	053
5,4	139	91	14,90	054	15,44	054				
5,5	139	91	11,89	055	14,75	055	23,36	055	10,16	055
5,6	139	91	15,57	056	16,28	056	27,88	056	11,96	056
5,7	139	91	17,35	057	16,39	057	28,56	057	12,16	057
5,8	139	91	15,04	058	16,68	058	28,83	058	12,82	058
5,9	139	91	16,80	059	16,80	059	30,75	059	13,29	059
6,0	139	91	14,34	060	15,31	060	24,03	060	10,40	060
6,1	148	97	17,08	061	17,77	061				
6,2	148	97	15,15	062	17,90	062				
6,3	148	97	17,08	063	18,17	063	33,06	063	15,73	063
6,4	148	97	15,44	064	18,98	064				
6,5	148	97	14,75	065	17,35	065	26,38	065	11,72	065
6,6	148	97	17,21	066	19,40	066				
6,7	148	97	17,63	067	19,80	067				
6,8	156	102	18,72	068	20,91	068	40,45	068	17,77	068
6,9	156	102	19,53	069	22,26	069				
7,0	156	102	17,77	070	19,15	070	31,03	070	14,34	070
7,1	156	102	17,21	071	22,82	071				
7,2	156	102	19,53	072	23,51	072	43,03	072	18,57	072
7,3	156	102	20,35	073	23,76	073				
7,4	156	102	21,17	074	25,15	074	43,72	074	19,15	074
7,5	156	102	21,45	075	22,82	075	37,70	075	17,35	075
7,6	165	109	23,10	076			44,96	076	19,80	076
7,7	165	109	22,01	077	27,46	077			20,09	077
7,8	165	109	24,03	078	28,00	078	46,46	078	20,35	078
7,9	165	109	23,22	079	28,28	079	46,86	079	20,91	079
8,0	165	109	19,68	080	21,33	080	35,67	080	15,84	080
8,1	165	109	21,57	081	29,53	081				
8,2	165	109	23,65	082	29,93	082				
8,3	165	109	25,15	083	30,61	083				
8,4	165	109	26,91	084	31,43	084	50,40	084	22,82	084
8,5	165	109	23,10	085	26,38	085	46,86	085	20,91	085
8,6	175	115	23,10	086	32,25	086				
8,7	175	115	23,22	087	32,52	087				
8,8	175	115	23,65	088	33,61	088	53,29	088	23,76	088
8,9	175	115	23,91	089	34,57	089				
9,0	175	115	24,19	090	25,96	090	43,30	090	19,68	090
9,1	175	115	24,19	091	35,52	091				
9,2	175	115	24,19	092	37,70	092			28,28	092
9,3	175	115	24,19	093	38,55	093			29,53	093

P	●	●	○	
M	●	○		
K	●	●	●	
N	○	●	○	●
S	○	○		
H		○		
O	○	○	○	

1) uncoated

→ v_c Page 48+49

Continued on next page

Twist drills, DIN 340, long

≤ 10xD



	UNI	WTL	WTL	WTW
	TiN	F.-nit	TiN	
	SIG 118° HSS-E	SIG 130° HSS-E	SIG 130° HSS	SIG 130° HSS
	10 270 ...	**10 225 ...**	**10 210 ...**	**10 200 ...**

DC h8 mm	OAL mm	LCF mm	EUR T2		EUR T2		EUR T2		EUR T2	
9,4	175	115	24,19	**094**	38,94	**094**			31,03	**094**
9,5	175	115	24,19	**095**	34,30	**095**	65,44	**095**	29,53	**095**
9,6	184	121	25,69	**096**					36,60	**096**
9,7	184	121	26,91	**097**	47,67	**097**	84,84	**097**		
9,8	184	121	28,83	**098**	47,67	**098**	89,08	**098**	38,55	**098**
9,9	184	121	31,30	**099**	47,67	**099**	95,38	**099**		
10,0	184	121	33,88	**100**	38,94	**100**	52,48	**100**	22,82	**100**
10,1	184	121	37,17	**101**						
10,2	184	121	39,49	**102**	50,28	**102**	93,86	**102**	42,36	**102**
10,3	184	121	42,78	**103**					66,40	**103**
10,4	184	121	42,78	**104**						
10,5	184	121	43,30	**105**	53,40	**105**	95,38	**105**	43,72	**105**
10,8	195	128			60,12	**108**				
11,0	195	128	51,52	**110**	59,02	**110**	78,16	**110**	35,52	**110**
11,5	195	128	52,05	**115**	72,14	**115**	130,60	**115**	58,07	**115**
11,6	195	128							78,16	**116**
11,8	195	128			79,66	**118**			69,96	**118**
12,0	205	134	52,59	**120**	72,68	**120**	97,01	**120**	44,68	**120**
12,2	205	134							81,98	**122**
12,3	205	134							69,96	**123**
12,5	205	134	57,66	**125**			99,19	**125**	46,04	**125**
13,0	205	134	62,71	**130**			104,30	**130**	50,01	**130**
13,5	214	140	63,79	**135**						
14,0	214	140	66,40	**140**			180,40	**140**	83,21	**140**

P	●	●	○	
M	●	○		
K	●	●	●	
N	○	●	○	●
S	○	○		
H		○		
O	○	○	○	

1) uncoated

→ v_c Page 48+49

Twist drills, DIN 1869, extra-long, series 1

▲ Up to diameter DC of 2.30 mm in uncoated version

> 10xD



WTL
TiAlN

SIG 130°
HSS-E

WTL
F.-nit

SIG 130°
HSS

DC h8 mm	OAL mm	LCF mm	10 236 ... EUR T2		10 235 ... EUR T2	
2,0	125	85			11,03	020 1)
2,1	125	85			13,65	021 1)
2,2	135	90			13,65	022 1)
2,3	135	90			13,65	023 1)
2,4	140	95			14,34	024
2,5	140	95			11,03	025
2,6	140	95			14,34	026
2,7	150	100			15,04	027
2,8	150	100			15,04	028
2,9	150	100			15,04	029
3,0	150	100	24,96	03000	12,56	030
3,1	155	105			15,73	031
3,2	155	105			15,73	032
3,3	155	105	39,73	03300	15,73	033
3,4	165	115			15,84	034
3,5	165	115	28,40	03500	12,56	035
3,6	165	115			15,84	036
3,7	165	115			17,63	037
3,8	175	120			17,63	038
3,9	175	120			17,63	039
4,0	175	120	27,84	04000	12,82	040
4,1	175	120			17,63	041
4,2	175	120	40,97	04200	17,90	042
4,3	185	125			19,40	043
4,4	185	125			19,40	044
4,5	185	125	31,27	04500	13,92	045
4,6	185	125			19,40	046
4,7	185	125			19,96	047
4,8	195	135			20,35	048
4,9	195	135			21,33	049
5,0	195	135	23,33	05000	14,75	050
5,1	195	135			22,26	051
5,2	195	135			22,82	052
5,3	195	135			22,82	053
5,4	205	140			22,82	054
5,5	205	140	33,04	05500	16,28	055
5,6	205	140			22,82	056
5,7	205	140			23,10	057
5,8	205	140			23,51	058
5,9	205	140			23,51	059
6,0	205	140	35,02	06000	16,28	060
6,1	215	150			25,15	061
6,2	215	150			24,73	062
6,3	215	150			26,38	063
6,4	215	150			27,46	064
6,5	215	150	37,65	06500	22,26	065
6,6	215	150			27,46	066
6,7	215	150			29,10	067
6,8	225	155	35,46	06800	28,70	068
6,9	225	155			29,93	069
7,0	225	155	32,39	07000	23,10	070
7,1	225	155			33,61	071
7,3	225	155			33,61	073
7,4	225	155			33,61	074
7,5	225	155	36,16	07500	25,96	075
7,7	240	165			35,93	077
7,8	240	165			37,70	078
7,9	240	165			38,55	079
8,0	240	165	35,79	08000	28,70	080
8,1	240	165			44,27	081
8,2	240	165			44,27	082
8,3	240	165			44,27	083
8,4	240	165			46,46	084
8,5	240	165	46,07	08500	37,01	085
8,6	250	175			47,41	086
8,7	250	175			50,01	087
8,8	250	175			51,78	088
9,0	250	175	51,43	09000	39,49	090
9,2	250	175			58,75	092
9,4	250	175			62,99	094
9,5	250	175	51,77	09500	45,63	095
9,6	265	185			64,75	096
9,7	265	185			64,75	097
9,8	265	185			65,59	098
9,9	265	185			65,59	099
10,0	265	185	58,35	10000	40,86	100
10,2	265	185	85,53	10200		
10,5	265	185			72,68	105
11,0	280	195			54,38	110
11,5	280	195			66,81	115
12,0	295	205			62,01	120
12,5	295	205			76,10	125
13,0	295	205			75,43	130

	10 236 ...	10 235 ...
P	●	●
M		
K	●	●
N	●	●
S		
H		
O	○	○

1) uncoated

→ v_c Page 50

Twist drills, DIN 1869, extra-long, series 2

▲ Up to diameter DC of 2.00 mm in uncoated version

> 10xD

WTL | TiAlN

WTL | F.-nit



SIG 130° HSS-E

SIG 130° HSS

DC h8 mm	OAL mm	LCF mm	10 246 ... EUR T2		10 245 ... EUR T2	
2,0	160	110			22,26	020 [1]
2,5	180	120			22,26	025
3,0	190	130	33,63	03000	17,21	030
3,5	210	145	39,44	03500	17,35	035
4,0	220	150	35,34	04000	18,31	040
4,5	235	160	39,09	04500	19,40	045
5,0	245	170	37,62	05000	19,40	050
5,5	260	180	46,54	05500	23,76	055
6,0	260	180	48,31	06000	23,51	060
6,5	275	190	46,23	06500	26,63	065
7,0	290	200	48,36	07000	29,53	070
7,5	290	200	52,03	07500	34,57	075
8,0	305	210	57,49	08000	34,30	080
8,5	305	210	56,47	08500	53,98	085
9,0	320	220	62,58	09000	52,59	090
9,5	320	220	65,16	09500	61,20	095
10,0	340	235	74,31	10000	55,46	100
10,2	340	235	83,76	10200		
10,5	340	235			80,47	105
11,0	365	250			78,56	110
11,5	365	250			92,90	115
12,0	375	260	107,80	12000	90,16	120
12,5	375	260			90,16	125
13,0	375	260			92,23	130
P			●		●	
M						
K			●		●	
N			●		●	
S						
H						
O			○		○	

1) uncoated

→ v_c Page 50+51

Twist drills, DIN 1869, extra-long, series 3

> 10xD

WTL | TiAlN

WTL | F.-nit



SIG 130° HSS-E

SIG 130° HSS

DC h8 mm	OAL mm	LCF mm	10 256 ... EUR T2		10 255 ... EUR T2	
2,5	225	150			28,70	025
3,0	240	160			28,70	030
3,5	265	180			23,10	035
4,0	280	190	45,93	04000	23,10	040
4,5	295	200			28,00	045
5,0	315	210	51,99	05000	28,00	050
5,5	330	225			29,93	055
6,0	330	225	59,88	06000	31,84	060
6,5	350	235			34,30	065
7,0	370	250			43,72	070
7,5	370	250			50,28	075
8,0	390	265	71,07	08000	51,52	080
8,5	390	265			65,17	085
9,0	410	280			69,96	090
9,5	410	280			82,67	095
10,0	430	295	97,56	10000	81,98	100
10,5	430	295			89,37	105
11,0	455	310			94,83	110
11,5	455	310			105,10	115
12,0	480	330			112,00	120
12,5	480	330			105,10	125
13,0	480	330			106,20	130
P			●		●	
M						
K			●		●	
N			●		●	
S						
H						
O			○		○	

→ v_c Page 50+51

Twist drills, DIN 1899

▲ 4 facet
▲ with reinforced shank

Scope of supply:
Packing quantity 5 pieces (Ø 0.15 mm packing quantity 10 pieces)
price per piece



N

SIG 118°
HSS-E-PM

10 103 ...

DC $_{-0,004}$ mm	OAL mm	LCF mm	DCONMS $_{h8}$ mm	EUR T2	
0,15	25	0,8	1,0	8,03	**00150**
0,20	25	1,5	1,0	6,45	**00200**
0,25	25	1,9	1,0	4,39	**00250**
0,30	25	1,9	1,0	5,10	**00300**
0,35	25	2,4	1,0	4,55	**00350**
0,40	25	3,0	1,0	4,55	**00400**
0,45	25	3,0	1,0	4,62	**00450**
0,50	25	3,4	1,0	4,55	**00500**
0,55	25	3,9	1,0	4,62	**00550**
0,60	25	3,9	1,0	4,60	**00600**
0,65	25	4,2	1,0	4,55	**00650**
0,70	25	4,8	1,0	4,23	**00700**
0,75	25	4,8	1,0	4,28	**00750**
0,80	25	5,3	1,5	4,71	**00800**
0,85	25	5,3	1,5	4,79	**00850**
0,90	25	6,0	1,5	4,79	**00900**
0,95	25	6,0	1,5	4,82	**00950**
1,00	25	6,8	1,5	4,82	**01000**
1,05	25	6,8	1,5	4,79	**01050**
1,10	25	7,6	1,5	4,94	**01100**
1,15	25	7,6	1,5	4,94	**01150**
1,20	25	8,5	1,5	4,82	**01200**
1,25	25	8,5	1,5	4,79	**01250**
1,30	25	8,5	1,5	4,97	**01300**
1,35	25	9,5	1,5	4,94	**01350**
1,40	25	9,5	1,5	4,82	**01400**
1,45	25	9,5	1,5	4,79	**01450**

P	●
M	○
K	●
N	●
S	○
H	
O	○

→ v_c Page 52

Twist drill, factory standard, short

≤ 3xD

WT

vap.



SIG 130°
HSS-E

10 285 ...

DC $_{h8}$ mm	OAL mm	LCF mm	MK	EUR T2	
13,0	147	66	1	52,20	**130**
13,5	168	70	2	66,56	**135**
14,0	168	70	2	66,26	**140**
14,5	172	74	2	70,92	**145**
15,0	172	74	2	69,02	**150**
15,5	176	78	2	103,60	**155**
16,0	176	78	2	66,56	**160**
16,5	179	81	2	105,20	**165**
17,0	179	81	2	69,96	**170**
17,5	183	85	2	110,30	**175**
18,0	183	85	2	74,19	**180**
18,5	186	88	2	111,10	**185**
19,0	186	88	2	81,17	**190**
19,5	212	91	3	131,60	**195**
20,0	212	91	3	94,43	**200**
21,0	216	95	3	106,20	**210**
22,0	219	98	3	111,10	**220**
23,0	222	101	3	118,60	**230**
24,0	225	104	3	121,50	**240**
25,0	225	104	3	126,60	**250**
26,0	256	107	4	177,60	**260**
27,0	259	110	4	187,30	**270**
28,0	259	110	4	191,40	**280**
30,0	263	114	4	209,00	**300**

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c Page 45

Twist drills, DIN 345

≤ 5xD

N

vap.

WTL



SIG 118°
HSS

SIG 130°
HSS-E

DC h8 mm	OAL mm	LCF mm	MK	10 265 ... EUR T2		10 280 ... EUR T2	
10,00	168	87	1	20,35	100	48,23	100 1)
10,20	168	87	1	23,65	102	50,01	102 1)
10,50	168	87	1	21,33	105	50,01	105 1)
10,80	175	94	1	28,00	108	54,78	108 1)
11,00	175	94	1	22,26	110	52,33	110 1)
11,20	175	94	1	29,78	112		
11,50	175	94	1	25,15	115	63,54	115 1)
11,80	175	94	1	31,84	118		
12,00	182	101	1	22,94	120	54,78	120 1)
12,20	182	101	1	32,52	122	59,99	122 1)
12,50	182	101	1	23,91	125	57,10	125 1)
12,80	182	101	1	32,80	128		
13,00	182	101	1	24,73	130	61,62	130 1)
13,20	182	101	1	33,76	132		
13,50	189	108	1	28,28	135	72,96	135 1)
13,80	189	108	1	35,52	138		
14,00	189	108	1	26,22	140	66,26	140 1)
14,25	212	114	2	39,49	142	98,37	142 1)
14,50	212	114	2	27,75	145	77,20	145 1)
14,75	212	114	2	42,36	147		
15,00	212	114	2	29,10	150	79,11	150 1)
15,25	218	120	2	38,94	152	101,00	152 1)
15,50	218	120	2	31,43	155	74,85	155 1)
15,75	218	120	2	35,52	157	84,04	157 1)
16,00	218	120	2	31,43	160	81,98	160 1)
16,25	223	125	2	47,96	162		
16,50	223	125	2	34,01	165	84,04	165 2)
16,75	223	125	2	38,94	167		
17,00	223	125	2	35,12	170	79,11	170 2)
17,25	228	130	2	43,98	172	92,78	172 2)
17,50	228	130	2	35,79	175	87,17	175 2)
17,75	228	130	2	44,39	177	94,54	177 2)
18,00	228	130	2	37,98	180	89,64	180 2)
18,25	233	135	2	45,63	182		
18,50	233	135	2	40,86	185	87,17	185 2)
18,75	233	135	2	47,96	187		
19,00	233	135	2	40,56	190	92,78	190 2)
19,25	238	140	2	50,98	192		
19,50	238	140	2	46,98	195		
19,75	238	140	2	53,29	197		
20,00	238	140	2	43,30	200	99,75	200 2)
20,25	243	145	2	58,34	202		
20,50	243	145	2	45,91	205		
20,75	243	145	2	58,91	207		
21,00	243	145	2	48,92	210	118,20	210 2)
21,25	248	150	2	60,67	212		
21,50	248	150	2	55,88	215		
21,75	248	150	2	63,54	217		
22,00	248	150	2	54,52	220	127,10	220 2)
22,25	248	150	2	65,17	222		
22,50	253	155	2	58,91	225	155,80	225 2)
22,75	253	155	2	66,81	227		
23,00	253	155	2	63,96	230	147,60	230 2)
23,50	276	155	3	63,54	235		
23,75	281	160	3	87,30	237		
24,00	281	160	3	66,56	240	159,90	240 2)
24,50	281	160	3	69,13	245		
24,75	281	160	3	96,08	247		
25,00	281	160	3	73,37	250	164,00	250 2)
25,50	286	165	3	76,23	255		
25,75	286	165	3	99,46	257		
26,00	286	165	3	84,30	260	189,90	260 2)
26,50	286	165	3	81,29	265		
26,75	291	170	3	128,40	267		
27,00	291	170	3	84,30	270	218,60	270 2)
27,50	291	170	3	86,78	275		
27,75	291	170	3	123,70	277		
28,00	291	170	3	92,90	280		
28,50	296	175	3	113,70	285		
28,75	296	175	3	128,40	287		
29,00	296	175	3	100,80	290		
29,50	296	175	3	103,00	295		
29,75	296	175	3	131,60	297		
30,00	296	175	3	100,80	300		
30,50	301	180	3	122,70	305		
31,00	301	180	3	119,10	310		
31,50	301	180	3	135,40	315		
32,00	334	185	4	125,30	320		
32,50	334	185	4	144,80	325		
33,00	334	185	4	134,40	330		
33,50	334	185	4	149,00	335		
34,00	339	190	4	157,20	340		
34,50	339	190	4	176,40	345		
35,00	339	190	4	159,90	350		
35,50	339	190	4	185,80	355		
36,00	344	195	4	174,90	360		
36,50	344	195	4	192,80	365		
37,00	344	195	4	189,90	370		
37,50	344	195	4	213,30	375		
38,00	349	200	4	200,90	380		
38,50	349	200	4	239,10	385		
39,00	349	200	4	221,40	390		
39,50	349	200	4	277,50	395		
40,00	349	200	4	229,60	400		
41,00	354	205	4	241,80	410		
42,00	354	205	4	265,10	420		
43,00	359	210	4	282,80	430		
44,00	359	210	4	297,80	440		
45,00	359	210	4	311,60	450		
46,00	364	215	4	321,20	460		
47,00	364	215	4	343,00	470		
48,00	369	220	4	351,20	480		
49,00	369	220	4	367,60	490		
50,00	369	220	4	379,80	500		
51,00	412	225	5	456,40	510		
52,00	412	225	5	489,20	520		
53,00	412	225	5	519,20	530		
54,00	417	230	5	532,90	540		
55,00	417	230	5	542,40	550		

	10 265 ...	10 280 ...
P	○	●
M		○
K	●	●
N	○	●
S		○
H		○
O	○	○

1) nitrided chamfer
2) vaporised

→ v_c Page 47

Twist drills, DIN 341, long

≤ 10xD



N

vap.

SIG 118°
HSS

WTL

SIG 130°
HSS-E

DC h8 mm	OAL mm	LCF mm	MK	10 295 ... EUR T2		10 297 ... EUR T2	
10,00	197	116	1	27,07	100	50,01	100 1)
10,20	197	116	1	30,07	102	47,55	102 1)
10,50	197	116	1	27,46	105	53,84	105 1)
10,80	206	125	1	35,12	108		
11,00	206	125	1	28,28	110	52,73	110 1)
11,20	206	125	1	37,70	112	47,96	112 1)
11,50	206	125	1	28,28	115	54,10	115 1)
11,80	206	125	1	38,13	118	47,96	118 1)
12,00	215	134	1	28,28	120	54,10	120 1)
12,20	215	134	1	37,70	122	47,16	122 1)
12,50	215	134	1	28,56	125	54,94	125 1)
12,80	215	134	1	40,86	128	47,55	128 1)
13,00	215	134	1	28,56	130	57,10	130 1)
13,20	215	134	1	40,86	132		
13,50	223	142	1	31,84	135	59,71	135 1)
13,80	223	142	1	52,33	138	53,84	138 1)
14,00	223	142	1	32,25	140	65,72	140 1)
14,25	245	147	2	50,28	142		
14,50	245	147	2	40,86	145	63,96	145 1)
14,75	245	147	2	50,28	147		
15,00	245	147	2	40,45	150	67,63	150 1)
15,25	251	153	2	50,28	152		
15,50	251	153	2	39,34	155	66,56	155 1)
15,75	251	153	2	50,83	157		
16,00	251	153	2	42,36	160	68,86	160 1)
16,25	257	159	2	57,10	162		
16,50	257	159	2	44,39	165	69,28	165 2)
16,75	257	159	2	54,78	167		
17,00	257	159	2	43,98	170	78,42	170 2)
17,50	263	165	2	50,28	175	75,15	175 2)
17,75	263	165	2	61,90	177		
18,00	263	165	2	50,01	180	81,98	180 2)
18,50	269	171	2	55,88	185	75,15	185 2)
19,00	269	171	2	54,94	190	92,78	190 2)
19,50	275	177	2	63,54	195	92,23	195 2)
20,00	275	177	2	60,25	200	98,93	200 2)
20,50	282	184	2	75,81	205	97,56	205 2)
21,00	282	184	2	68,86	210	116,60	210 2)
21,50	289	191	2	81,98	215		
22,00	289	191	2	75,15	220	129,30	220 2)
22,50	296	198	2	83,48	225		
23,00	296	198	2	78,16	230		
23,50	319	198	3	95,22	235		
24,00	327	206	3	96,08	240	164,00	240 2)
24,50	327	206	3	103,20	245		
25,00	327	206	3	96,75	250	170,90	250 2)
25,50	335	214	3	116,00	255		
26,00	335	214	3	110,90	260		
26,50	335	214	3	119,00	265		
27,00	343	222	3	119,00	270		
27,50	343	222	3	147,60	275		
28,00	343	222	3	132,40	280		
29,00	351	230	3	153,10	290		
29,50	351	230	3	173,50	295		
30,00	351	230	3	153,10	300		
30,50	360	239	3	194,00	305		
31,00	360	239	3	184,50	310		
31,50	360	239	3	205,00	315		
32,00	397	248	4	198,20	320		
33,00	397	248	4	198,20	330		
33,50	397	248	4	231,00	335		
34,00	406	257	4	244,60	340		
35,00	406	257	4	237,70	350		
36,00	416	267	4	274,60	360		
37,00	416	267	4	310,20	370		
37,50	416	267	4	333,30	375		
38,00	426	277	4	296,40	380		
39,00	426	277	4	317,10	390		
40,00	426	277	4	333,30	400		
42,00	436	287	4	377,20	420		
43,00	447	298	4	404,40	430		
44,00	447	298	4	404,40	440		
45,00	447	298	4	422,20	450		
50,00	470	321	4	554,80	500		

	10 295 ...	10 297 ...
P	○	●
M		○
K	●	●
N	○	●
S		○
H		○
O	○	○

1) nitrided chamfer
2) vaporised

→ v_c Page 49

Twist drills, DIN 1870, extra-long, series 1

> 10xD

WTL



SIG 130°
HSS

10 305 ...

DC h8 mm	OAL mm	LCF mm	MK	EUR T2	
10,0	285	185	1	51,09	100 1)
10,5	285	185	1	62,16	105 1)
11,0	300	195	1	59,71	110 1)
11,5	300	195	1	62,71	115 1)
12,0	310	205	1	66,56	120 1)
12,5	310	205	1	68,60	125 1)
13,0	310	205	1	69,28	130 1)
13,5	325	220	1	79,92	135 1)
14,0	325	220	1	77,74	140 1)
14,5	340	220	2	80,47	145 1)
15,0	340	220	2	84,71	150 1)
15,5	355	230	2	92,78	155 1)
16,0	355	230	2	88,95	160 1)
16,5	355	230	2	89,64	165 2)
17,0	355	230	2	91,14	170 2)
17,5	370	245	2	96,08	175 2)
18,0	370	245	2	98,93	180 2)
18,5	370	245	2	109,60	185 2)
19,0	370	245	2	111,90	190 2)
19,5	385	260	2	120,80	195 2)
20,0	385	260	2	127,80	200 2)
21,0	385	260	2	147,60	210 2)
22,0	405	270	2	154,50	220 2)
23,0	405	270	2	181,60	230 2)
24,0	440	290	3	202,20	240 2)
25,0	440	290	3	205,00	250 2)
26,0	440	290	3	222,70	260 2)
28,0	460	305	3	258,20	280 2)
30,0	460	305	3	296,40	300 2)

P	●
M	
K	●
N	●
S	
H	
O	○

1) nitrided chamfer
2) vaporised

→ v_c Page 51

Twist drills, DIN 1870, extra-long, series 2

> 10xD

WTL



SIG 130°
HSS

10 315 ...

DC h8 mm	OAL mm	LCF mm	MK	EUR T2	
10,0	360	235	1	73,37	100 1)
10,5	360	235	1	92,23	105 1)
11,0	375	250	1	84,04	110 1)
11,5	375	250	1	89,64	115 1)
12,0	395	260	1	102,20	120 1)
13,0	395	260	1	107,10	130 1)
13,5	410	275	1	114,20	135 1)
14,0	410	275	1	114,20	140 1)
14,5	425	275	2	115,20	145 1)
15,0	425	275	2	116,00	150 1)
15,5	445	295	2	120,80	155 1)
16,0	445	295	2	119,00	160 1)
16,5	445	295	2	135,80	165 2)
17,0	445	295	2	127,80	170 2)
17,5	465	310	2	138,00	175 2)
18,0	465	310	2	143,40	180 2)
18,5	465	310	2	154,50	185 2)
19,0	465	310	2	157,20	190 2)
19,5	490	325	2	179,00	195 2)
20,0	490	325	2	177,60	200 2)
21,0	490	325	2	189,90	210 2)
22,0	515	345	2	228,20	220 2)
23,0	515	345	2	231,00	230 2)
24,0	555	365	3	258,20	240 2)
25,0	555	365	3	261,00	250 2)
26,0	555	365	3	306,10	260 2)
28,0	580	385	3	355,20	280 2)
30,0	580	385	3	411,30	300 2)

P	●
M	
K	●
N	●
S	
H	
O	○

1) nitrided chamfer
2) vaporised

→ v_c Page 51

NC spot drills, factory standard

▲ helical flutes



			NC-A		NC-A		NC-A		NC-A	
					TiN				TiN	
			SIG 120°		SIG 120°		SIG 90°		SIG 90°	
			HSS		HSS		HSS		HSS	
			10 510 ...		10 512 ...		10 520 ...		10 522 ...	
DC h6 mm	OAL mm	LCF mm	EUR	T2	EUR	T2	EUR	T2	EUR	T2
3	46	12,0	8,83	030	12,81	030	8,83	030	12,81	030
4	55	12,0	8,96	040	13,09	040	8,96	040	13,09	040
5	62	14,0	9,38	050	13,64	050	9,38	050	13,64	050
6	66	16,0	9,61	060	13,80	060	9,61	060	13,80	060
8	79	21,0	16,12	080	23,36	080	16,12	080	23,36	080
10	89	25,0	17,90	100	25,83	100	17,90	100	25,83	100
12	102	30,0	25,96	120	37,85	120	25,96	120	37,85	120
16	115	37,5	34,01	160	49,46	160	34,01	160	49,46	160
20	131	45,0	54,78	200	79,52	200	54,78	200	79,52	200

▲ with clamping flat to DIN 1835 B



					SIG 120°		SIG 90°		SIG 90°	
					HSS		HSS		HSS	
					10 513 ...		10 521 ...		10 523 ...	
DC h6 mm	OAL mm	LCF mm			EUR	T2	EUR	T2	EUR	T2
6	66	7,0			13,80	060	9,88	060	13,80	060
8	79	9,0			19,68	080	13,92	080	19,68	080
10	89	11,5			21,74	100	15,57	100	21,74	100
12	102	14,0			30,87	120	21,57	120	30,87	120
16	115	18,0			40,31	160	28,28	160	40,31	160
20	131	23,0			58,75	200	40,31	200	58,75	200
P			●		●		●		●	
M			○		○		○		○	
K			●		●		●		●	
N			○		○		○		○	
S			○		○		○		○	
H										
O			○		○		○		○	

→ v_c Page 53

Suitable only for spot drilling!

NC spot drill factory standard long

▲ with clamping flat to DIN 1835 B



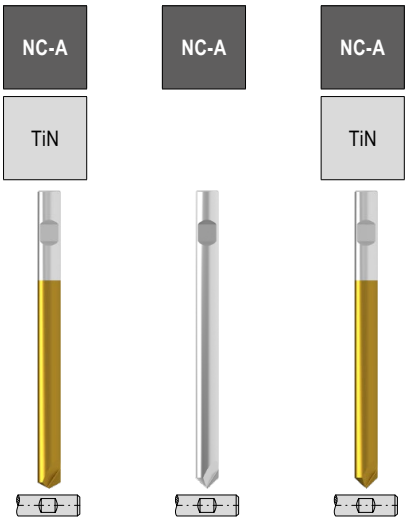

DC h6 mm	OAL mm	LCF mm		SIG 120° HSS 10 532 ... EUR T2		SIG 90° HSS 10 526 ... EUR T2		SIG 90° HSS 10 528 ... EUR T2	
6	93	7,0		17,21	**060**	12,12	**060**	17,21	**060**
8	117	9,0		27,18	**080**	18,85	**080**	27,18	**080**
10	133	11,5		29,78	**100**	20,76	**100**	29,78	**100**
12	151	14,0		35,26	**120**	24,73	**120**	35,26	**120**
16	178	18,0		54,65	**160**	37,85	**160**	54,65	**160**
20	205	23,0		76,92	**200**	52,48	**200**	76,92	**200**
P				●		●		●	
M				○		○		○	
K				●		●		●	
N				○		○		○	
S				○		○		○	
H									
O				○		○		○	

→ v_c Page 53

Suitable only for spot drilling!

NC spot drills, factory standard, long

▲ helical flutes

NC-A



SIG 90°
HSS

10 525 ...

DC h6 mm	OAL mm	LCF mm	EUR T2	
6,35	105	17	14,90	**025**
8,00	118	21	27,33	**030**
9,52	132	25	27,75	**040**
12,70	159	30	39,34	**050**
15,87	186	37	34,30	**060**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Suitable only for spot drilling!

Centre drills, DIN 333, form B

▲ with protective countersink 120°

ZB

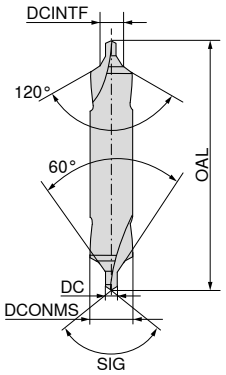

Right-hand
SIG 118°
HSS

10 480 ...

DC mm	DCONMS h8 mm	DCINTF k12 mm	OAL mm	EUR T2	
1,00	4,0	2,12	35,5	9,05	**100**
1,25	5,0	2,65	40,0	10,25	**125**
1,60	6,3	3,35	45,0	9,45	**160**
2,00	8,0	4,25	50,0	10,25	**200**
2,50	10,0	5,30	56,0	12,50	**250**
3,15	11,2	6,70	62,0	18,17	**315**
4,00	14,0	8,50	69,0	23,36	**400**
5,00	18,0	10,60	77,0	29,93	**500**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Centre drills, DIN 333, form A

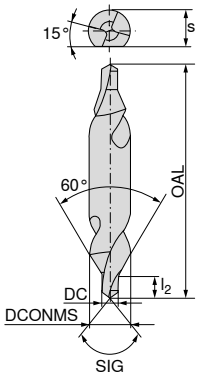

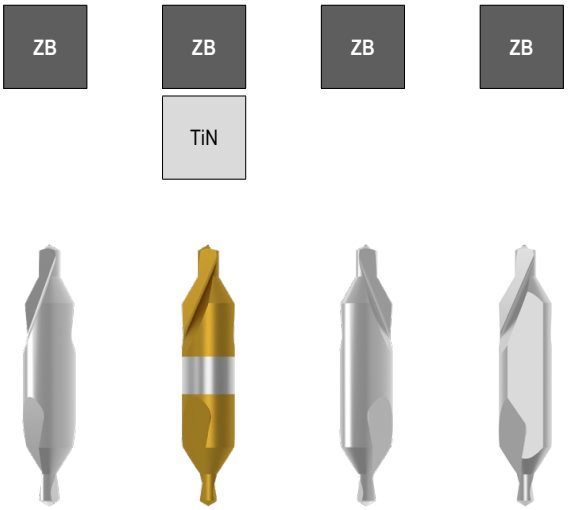

DC mm	s mm	DCONMS $_{h8}$ mm	OAL mm	l_2 mm	Right-hand SIG 118° HSS 10 415 ... EUR T2		Right-hand SIG 118° HSS 10 425 ... EUR T2		Left-hand SIG 118° HSS 10 435 ... EUR T2		Right-hand SIG 118° HSS-E 10 445 ... EUR T2	
0,50		3,15	25,0	0,8	6,66	**050** [2]	15,73	**050** [2]	9,05	**050** [2]		
0,80		3,15	25,0	1,1	6,39	**080** [2]	15,15	**080** [2]	8,90	**080** [2]		
1,00		3,15	31,5	1,3	5,81	**100**	13,92	**100**	8,03	**100**		
1,25		3,15	31,5	1,6	6,66	**125**	15,84	**125**	9,45	**125**		
1,60		4,00	35,5	2,0	5,33	**160**	12,73	**160**	8,31	**160**		
1,60	3,25	4,00	35,5	2,0							7,16	**160** [1]
2,00		5,00	40,0	2,5	5,68	**200**	13,55	**200**	9,30	**200**		
2,00	4,20	5,00	40,0	2,5							7,32	**200** [1]
2,50		6,30	45,0	3,1	6,59	**250**	15,73	**250**	10,05	**250**		
2,50	5,35	6,30	45,0	3,1							8,48	**250** [1]
3,15		8,00	50,0	3,9	8,48	**315**	19,96	**315**	12,73	**315**		
3,15	6,95	8,00	50,0	3,9							11,15	**315** [1]
4,00		10,00	56,0	5,0	13,31	**400**	31,30	**400**	17,08	**400**		
4,00	8,40	10,00	56,0	5,0							16,28	**400** [1]
5,00		12,50	63,0	6,3	19,15	**500**	44,81	**500**	26,50	**500**		
5,00	10,95	12,50	63,0	6,3							23,76	**500** [1]
6,30		16,00	71,0	8,0	28,42	**630**	66,68	**630**	39,07	**630**		
6,30	14,00	16,00	71,0	8,0							39,90	**630** [1]
P					●		●		●		●	
M					○		○		○		○	
K					●		●		●		●	
N					○		○		○		○	
S					○		○		○		○	
H												
O					○		○		○		○	

1) with flat
2) Single ended

→ v_c Page 53

Centre drills, DIN 333, form R

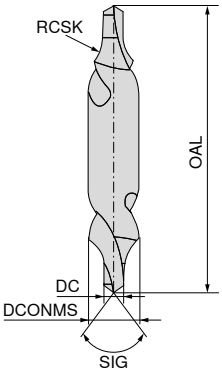

ZB

ZB

DC mm	DCONMS h8 mm	OAL mm	RCSK mm	Right-hand SIG 118° HSS 10 455 ... EUR T2		Left-hand SIG 118° HSS 10 475 ... EUR T2	
0,50	3,15	25,0	2,00	6,66	**050** [1]		
0,80	3,15	25,0	2,50	6,39	**080** [1]	12,73	**080** [1]
1,00	3,15	31,5	2,90	5,72	**100**	9,92	**100**
1,25	3,15	31,5	3,15	6,51	**125**	11,91	**125**
1,60	4,00	35,5	4,00	5,33	**160**	9,68	**160**
2,00	5,00	40,0	5,00	5,68	**200**	9,92	**200**
2,50	6,30	45,0	6,30	6,59	**250**	10,25	**250**
3,15	8,00	50,0	8,00	8,48	**315**	14,22	**315**
4,00	10,00	56,0	10,00	12,35	**400**	20,65	**400**
5,00	12,50	63,0	12,50	18,72	**500**	30,19	**500**
6,30	16,00	71,0	16,00	28,42	**630**		
P				●		●	
M				○		○	
K				●		●	
N				○		○	
S				○		○	
H							
O				○		○	

1) Single ended

→ v_c Page 53

Core drills (spiral countersinks)



SIG 120°
HSS

DC h8 mm	OAL mm	LCF mm	PHD mm	MK	10 228 ... EUR T2	
12,00	182	101	8,4	1	38,13	120
12,75	182	101	9,1	1	46,73	127
13,00	182	101	9,1	1	41,80	130
13,75	189	108	9,8	1	47,16	137
14,00	189	108	9,8	1	42,49	140
14,75	212	114	10,5	2	53,01	147
15,00	212	114	10,5	2	47,16	150
15,75	218	120	11,2	2	54,94	157
16,00	218	120	11,2	2	49,18	160
16,75	223	125	11,9	2	58,62	167
17,00	223	125	11,9	2	52,05	170
17,75	228	130	12,6	2	60,12	177
18,00	228	130	12,6	2	53,01	180
18,70	233	135	13,3	2	60,53	187
19,00	233	135	13,3	2	59,71	190
19,70	238	140	14,0	2	60,53	197
20,00	238	140	14,0	2	59,71	200
20,70	243	145	14,6	2	70,63	207
21,00	243	145	14,6	2	69,80	210
21,70	248	150	15,3	2	71,44	217
22,00	248	150	15,3	2	70,37	220
22,70	253	155	16,0	2	78,82	227
23,00	253	155	16,0	2	77,88	230
23,70	281	160	16,6	3	82,24	237
24,00	281	160	16,6	3	80,47	240
24,70	281	160	17,3	3	87,44	247
25,00	281	160	17,3	3	85,93	250
25,70	286	165	18,0	3	91,54	257
26,00	286	165	18,0	3	90,32	260
26,70	291	170	18,6	3	106,90	267
27,00	291	170	18,6	3	104,80	270
27,70	291	170	19,3	3	107,80	277
28,00	291	170	19,3	3	106,00	280
28,70	296	175	20,0	3	118,00	287
29,00	296	175	20,0	3	117,00	290
29,70	296	175	20,5	3	122,80	297
30,00	296	175	20,5	3	121,20	300

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Stepped drills, DIN 8378

▲ Countersinking angle 90°
▲ for tapping drill holes according to DIN 336, Table 1 with 90 ° chamfer and for through holes according to DIN EN 20273 – medium
▲ the feed rate has to be selected based on the small Ø DC

DIN 8378

SB

vap.



SIG 118°
HSS

10 365 ...

For threads	DC h9 mm	DCONMS h8 mm	OAL mm	SDL_1 mm	LCF mm	EUR T2	
M3	2,5	3,4	70	8,8	39	22,82	030
M4	3,3	4,5	80	11,4	47	24,45	040
M5	4,2	5,5	93	13,6	57	25,15	050
M6	5,0	6,6	101	16,5	63	28,70	060
M8	6,8	9,0	125	21,0	81	32,25	080
M10	8,5	11,0	142	25,5	94	41,25	100
M12	10,2	13,5	160	30,0	108	53,01	120

▲ for through holes according to DIN EN 20273 – fine
▲ with 90° screw head countersink
▲ the feed rate has to be selected based on the small Ø DC

DIN 8374



SIG 118°
HSS

10 355 ...

For threads	DC h9 mm	DCONMS h8 mm	OAL mm	SDL_1 mm	LCF mm	EUR T2	
M3	3,2	6,0	93	9	57	26,22	030
M4	4,3	8,0	117	11	75	31,14	040
M5	5,3	10,0	133	13	87	38,25	050
M6	6,4	11,5	142	15	94	43,72	060
M8	8,4	15,0	169	19	114	72,14	080
M10	10,5	19,0	198	23	135	111,30	100

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Stepped drills, overall length to DIN 1897

▲ Countersinking angle 90°
▲ for tapping drill holes according to DIN 336, Table 1 with 90 ° chamfer and for through holes according to DIN EN 20273 – medium
▲ the feed rate has to be selected based on the small Ø DC

SB



SIG 118°
HSS

10 320 ...

For threads	DC h6 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	LCF mm	EUR T2	
M3	2,5	3,4	52	8,8	20	14,62	030
M4	3,3	4,5	58	11,4	24	14,75	040
M5	4,2	5,5	66	13,6	28	15,84	050
M6	5,0	6,6	70	16,5	31	17,08	060
M8	6,8	9,0	84	21,0	40	19,68	080
M10	8,5	11,0	95	25,5	47	25,41	100
M12	10,2	13,5	107	30,0	54	32,63	120

▲ for through holes according to DIN EN 20273 – fine
▲ with 90° screw head countersink
▲ the feed rate has to be selected based on the small Ø DC

DIN 8374



SIG 118°
HSS

10 330 ...

For threads	DC h6 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	LCF mm	EUR T2	
M3	3,2	6,0	66	9	28	17,08	030
M4	4,3	8,0	79	11	37	18,98	040
M5	5,3	10,0	89	13	43	23,91	050
M6	6,4	11,5	95	15	47	26,50	060
M8	8,4	15,0	111	19	56	31,14	080
M10	10,5	19,0	127	23	64	46,04	100

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Stepped drills, DIN 8376

▲ Countersinking angle 180°
▲ for through holes according to DIN EN 20273 – Medium
▲ for screw heads to DIN 974-1 – Series 1
▲ the feed rate has to be selected based on the small Ø DC

DIN 8376

SB

vap.



SIG 118°
HSS

10 375 ...

For threads	DC h9 mm	DCONMS h8 mm	OAL mm	SDL_1 mm	LCF mm	EUR T2		
M3	3,4	6	93	9	57	26,22	**030**	1)
M4	4,5	8	117	11	75	31,14	**040**	
M5	5,5	10	133	13	87	37,17	**050**	
M6	6,6	11	142	15	94	42,78	**060**	
M8	9,0	15	169	19	114	53,98	**080**	
M10	11,0	18	191	23	130	112,30	**100**	

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) DCONMS not according to DIN 974-1

→ v_c Page 53

Stepped drills, factory standard, total length according to DIN 1897

▲ Countersinking angle 180°
▲ for through holes according to DIN EN 20273 – Medium
▲ for screw heads to DIN 974-1 – Series 1
▲ the feed rate has to be selected based on the small Ø DC

DIN 8376

SB



SIG 118°
HSS

10 340 ...

For threads	DC h6 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	LCF mm	EUR T2		
M3	3,4	6	66	9	28	16,28	**030**	1)
M4	4,5	8	79	11	37	18,46	**040**	
M5	5,5	10	89	13	43	22,82	**050**	
M6	6,6	11	95	15	47	26,22	**060**	
M8	9,0	15	111	19	56	33,61	**080**	
M10	11,0	18	123	23	62	50,15	**100**	

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) DCONMS not according to DIN 974-1

→ v_c Page 53

Stepped drills, DIN 8377

▲ Countersinking angle 180°
▲ for through holes according to DIN EN 20273 – Medium
▲ for screw heads to DIN 974-1 – Series 1
▲ the feed rate has to be selected based on the small Ø DC

DIN 8377

SB

vap.



SIG 118°
HSS

							10 405 ...	
For threads	DC_1 h9 mm	DC_2 mm	OAL mm	SDL_1 mm	LCF mm	MK	EUR T2	
M6	6,6	11	175	15	94	1	53,98	060
M8	9,0	15	212	19	114	2	70,92	080
M10	11,0	18	228	23	130	2	94,83	100
M12	13,5	20	238	27	140	2	114,90	120
M14	15,5	24	281	31	160	3	147,60	140
M16	17,5	26	286	35	165	3	174,90	160

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Stepped drills for centring, factory standard

▲ with flat
▲ Countersinking angle 60°
▲ Special drill for creating tapping drill holes with centring, 60° countersinking angle according to DIN 332, sheet 2, form D.
▲ Point thinning ≥ Ø 3,3 mm
▲ the feed rate has to be selected based on the small Ø DC

SB

vap.

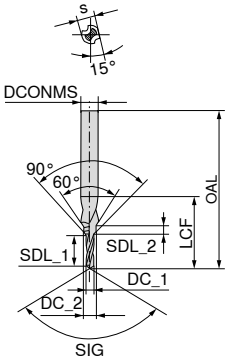

SIG 118°
HSS

10 350 ...

For threads	DC_1 h8 mm	DCONMS h7 mm	DC_2 mm	s mm	OAL mm	SDL_1 mm	LCF mm	SDL_2 mm	EUR T2	
M4	3,3	8,0	4,3	6,75	63	11,0	23	1,60	62,99	**040**
M5	4,2	10,0	5,3	8,45	67	13,0	27	2,15	69,13	**050**
M6	5,0	12,5	6,4	10,45	71	16,0	33	2,90	75,69	**060**
M8	6,8	14,0	8,4	12,50	88	19,5	41	3,50	71,75	**080**
M10	8,5	16,0	10,5	14,85	94	23,0	47	4,70	82,24	**100**
M12	10,2	20,0	13,0	18,45	105	28,0	59	6,50	108,20	**120**
M16	14,0	25,0	17,0	23,40	132	33,0	67	8,30	151,60	**160**
M20	17,5	31,5	21,0	29,35	145	38,0	77	10,35	202,20	**200**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c Page 53

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – Hole depth 3xD

Index	10 122 ... Type VX-TiN		10 113 ... Type UNI-PM-TiN		10 107 ... Type UNI-TiN		10 105 ... Type N		10 130 ... Type VA	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	46	6	44	6	46	6	28	6	38	5
P.1.2	39	5	37	5	39	5	24	5	32	4
P.1.3	35	5	33	5	35	5	21	5	29	4
P.1.4	32	5	31	5	32	5	20	5	27	4
P.1.5	28	5	26	5	28	5	17	5		
P.2.1	35	5	32	6	35	5	17	4	25	5
P.2.2	24	4	23	5	24	4	12	3	18	4
P.2.3	21	4	19	5	21	4	10	3		
P.2.4	19	3	18	4	19	3	9	2		
P.3.1	17	4	21	4	17	4	13	4		
P.3.2	13	3	16	3	13	3				
P.3.3	12	3	15	3	12	3				
P.4.1	18	4	14	3	18	4			15	3
P.4.2	17	3	14	2	17	3			14	2
M.1.1	15	4			15	4			13	3
M.2.1	12	3			12	3			11	2
M.3.1	10	3			10	3			9	2
K.1.1	41	6	46	6	41	6	30	6		
K.1.2	33	6	37	6	33	6	24	6		
K.2.1	35	6	39	6	35	6	26	6		
K.2.2	27	5	30	5	27	5	20	5		
K.3.1	35	6	39	6	35	6	26	6		
K.3.2	27	5	30	5	27	5	20	5		
N.1.1									80	7
N.1.2									80	7
N.2.1	75	6	69	6	75	6	50	6	65	6
N.2.2	60	5	55	5	60	5	40	5	52	5
N.2.3	52	5	48	5	52	5	35	5	46	5
N.3.1	69	5	64	5	69	5	60	5	60	5
N.3.2	41	4	39	4	41	4	36	4	36	4
N.3.3	55	4	52	4	55	4	48	4	48	4
N.4.1	70	5	60	5	70	5	45	5	6	5
S.1.1			7	2					8	1
S.1.2			6	1					6	1
S.2.1			6	2					7	1
S.2.2										
S.2.3										
S.3.1	9	2			9	2			10	2
S.3.2	6	1			6	1			7	1
S.3.3									6	2
H.1.1			6	1						
H.1.2										
H.1.3										
H.1.4										
H.2.1			10	3						
H.3.1										
O.1.1	29	4	23	4	29	4	20	5		
O.1.2	29	4			29	4	20	5		
O.2.1	29	4	23	4	29	4	20	5		
O.2.2	29	4	23	4	29	4	20	5		
O.3.1										

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Index	10 106 ... Type WNX		10 109 ... Type WT		10 110 ... Type WT-TiN		10 285 ... Type WT-MK	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	38	6	38	6	44	6	38	6
P.1.2	32	5	32	5	37	5	32	5
P.1.3	29	5	29	5	33	5	29	5
P.1.4	27	5	27	5	31	5	27	5
P.1.5	23	5	23	5	26	5	23	5
P.2.1	28	6	25	5	29	5	25	5
P.2.2	20	5	18	4	20	4	18	4
P.2.3	17	5	15	4	17	4	15	4
P.2.4	15	4	14	3	16	3	14	3
P.3.1	18	4	16	4	18	4	16	4
P.3.2	14	3	12	3	14	3	12	3
P.3.3	13	3	12	3	14	3	12	3
P.4.1	13	3	14	3	17	3	14	3
P.4.2	12	2	14	2	16	2	14	2
M.1.1			12	3	14	3	12	3
M.2.1			10	2	12	2	10	2
M.3.1			8	2	10	2	8	2
K.1.1	40	6	35	6	40	6	35	6
K.1.2	32	6	28	6	32	6	28	6
K.2.1	34	6	30	6	34	6	30	6
K.2.2	26	5	23	5	26	5	23	5
K.3.1	34	6	30	6	34	6	30	6
K.3.2	26	5	23	5	26	5	23	5
N.1.1								
N.1.2								
N.2.1	60	6						
N.2.2	48	5						
N.2.3	42	5						
N.3.1	56	5	62	5	71	5	62	5
N.3.2	34	4	37	4	43	4	37	4
N.3.3	45	4						
N.4.1	55	5						
S.1.1	6	2	8	1	9	1	8	1
S.1.2	5	1	6	1	7	1	6	1
S.2.1	5	2	7	1	8	1	7	1
S.2.2					5	1		
S.2.3					6	1		
S.3.1			10	2	12	2	10	2
S.3.2			7	1	7	1	7	1
S.3.3			6	2	7	2	6	2
H.1.1	5	1	4	1	5	1	4	1
H.1.2								
H.1.3								
H.1.4								
H.2.1	9	3	8	3	9	3	8	3
H.3.1								
O.1.1	20	4						
O.1.2								
O.2.1	20	4						
O.2.2	20	4						
O.3.1								

When drilling tough materials which tend to jam, chips should be removed at drilling depth ≥ 4xD and the cutting speed v_c should be reduced as follows: at drilling depths > 4xD by 10 %, at drilling depths > 6xD by 15–20 %.
It is also recommended to use an emulsion for cooling.

v_c = Cutting speed in m/min.
F = Factor for feed selection
Feed approximate values see → **Page 54**

Cutting data standard values – Hole depth 5xD

Index	10 124 ... Type VX-TiN		10 173 ... Type UNI-PM-TiN		10 171 ... Type UNI-TiN		10 152 ... Type N		10 175 ... Type VA	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	**46**	6	**44**	6	**46**	6	28	6	38	5
P.1.2	**39**	5	**37**	5	**39**	5	24	5	32	4
P.1.3	**35**	5	**33**	5	**35**	5	21	5	29	4
P.1.4	**32**	5	**31**	5	**32**	5	20	5	27	4
P.1.5	**28**	5	**26**	5	**28**	5	17	5		
P.2.1	**35**	5	**32**	6	**35**	5	17	4	25	5
P.2.2	**24**	4	**23**	5	**24**	4	12	3	18	4
P.2.3	**21**	4	**19**	5	**21**	4	10	3		
P.2.4	**19**	3	**18**	4	**19**	3	9	2		
P.3.1	**17**	4	**21**	4	**17**	4	13	4		
P.3.2	**13**	3	**16**	3	**13**	3				
P.3.3	**12**	3	**15**	3	**12**	3				
P.4.1	**18**	4	**14**	3	**18**	4			15	3
P.4.2	**17**	3	**14**	2	**17**	3			14	2
M.1.1	**15**	4			**15**	4			**13**	3
M.2.1	**14**	4			**14**	4			**12**	3
M.3.1	**10**	3			**10**	3			**9**	2
K.1.1	**41**	6	**46**	6	**41**	6	**30**	6		
K.1.2	**33**	6	**37**	6	**33**	6	**24**	6		
K.2.1	**35**	6	**39**	6	**35**	6	**26**	6		
K.2.2	**27**	5	**30**	5	**27**	5	**20**	5		
K.3.1	**35**	6	**39**	6	**35**	6	**26**	6		
K.3.2	**27**	5	**30**	5	**27**	5	**20**	5		
N.1.1									**80**	7
N.1.2									**80**	7
N.2.1	75	6	69	6	75	6	50	6	**65**	6
N.2.2	60	5	55	5	60	5	40	5	**52**	5
N.2.3	52	5	48	5	52	5	35	5	**46**	5
N.3.1	69	5	64	5	69	5	60	5	**60**	5
N.3.2	41	4	39	4	41	4	36	4	**36**	4
N.3.3	55	4	52	4	55	4	48	4	**48**	4
N.4.1	75	6	65	6	70	6	45	6	**60**	6
S.1.1			7	2					8	1
S.1.2			6	1					6	1
S.2.1			6	2					7	1
S.2.2										
S.2.3										
S.3.1	9	2			9	2			10	2
S.3.2	6	1			6	1			7	1
S.3.3									6	1
H.1.1			6	1						
H.1.2										
H.1.3										
H.1.4										
H.2.1			10	3						
H.3.1										
O.1.1	29	4	23	4	29	4	20	5		
O.1.2	29	4			29	4	20	5		
O.2.1	29	4	23	4	29	4	20	5		
O.2.2	29	4	23	4	29	4	20	5		
O.3.1										

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Index	10 161 ... Type W		10 168 ... Type WTL		10 170 ... Type WTL-TiN		10 265 ... Type N-MK		10 280 ... Type WTL-MK	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1			**32**	6	**37**	6	28	6	**32**	6
P.1.2			**27**	5	**31**	5	24	5	**27**	5
P.1.3			**24**	5	**28**	5	21	5	**24**	5
P.1.4			**23**	5	**26**	5	20	5	**23**	5
P.1.5			**19**	5	**22**	5	17	5	**19**	5
P.2.1			**20**	5	**22**	5	17	4	**20**	5
P.2.2			**14**	4	**16**	4	12	3	**14**	4
P.2.3			**12**	4	**13**	4	10	3	**12**	4
P.2.4			**11**	3	**12**	3	9	2	**11**	3
P.3.1			**15**	4	**17**	4	13	4	**15**	4
P.3.2			**11**	3	**13**	3			**11**	3
P.3.3			**10**	3	**12**	3			**10**	3
P.4.1			**10**	3	**12**	3			**10**	3
P.4.2			**10**	2	**11**	2			**10**	2
M.1.1			9	3	11	3			9	3
M.2.1			8	2					8	2
M.3.1										
K.1.1			**35**	6	**40**	6	**30**	6	**35**	6
K.1.2			**28**	6	**32**	6	**24**	6	**28**	6
K.2.1			**29**	6	**34**	6	**26**	6	**29**	6
K.2.2			**22**	5	**26**	5	**20**	5	**22**	5
K.3.1			**29**	6	**34**	6	**26**	6	**29**	6
K.3.2			**22**	5	**26**	5	**20**	5	**22**	5
N.1.1	**70**	7	**69**	7					**69**	7
N.1.2	**70**	7	**69**	7					**69**	7
N.2.1	**60**	6	**58**	6	66	6	50	6	**58**	6
N.2.2			**46**	5	53	5	40	5	**46**	5
N.2.3			**40**	5	46	5	35	5	**40**	5
N.3.1			**69**	5	79	5	60	5	**69**	5
N.3.2			**41**	4	48	4	36	4	**41**	4
N.3.3	**56**	4	**55**	4	63	4	48	4	**55**	4
N.4.1	**60**	6	**6**	6	60	6	45	6	**50**	6
S.1.1			7	2	8	2			7	2
S.1.2			6	1	6	1			6	1
S.2.1			6	2	7	2			6	2
S.2.2			3	1	4	1			3	1
S.2.3			4	1	5	1			4	1
S.3.1			6	2	7	2			6	2
S.3.2			4	1	4	1			4	1
S.3.3										
H.1.1			5	1	5	1			5	1
H.1.2										
H.1.3										
H.1.4										
H.2.1			9	3	11	3			9	3
H.3.1										
O.1.1			23	4	26	4	20	5	23	4
O.1.2			23	4	26	4	20	5	23	4
O.2.1			23	4	26	4	20	5	23	4
O.2.2			23	4	26	4	20	5	23	4
O.3.1										

When drilling tough materials which tend to jam, chips should be removed at drilling depth ≥ 4xD and the cutting speed v_c should be reduced as follows: at drilling depths > 4xD by 10 %, at drilling depths > 6xD by 15–20 %.
It is also recommended to use an emulsion for cooling.

v_c = Cutting speed in m/min.
F = Factor for feed selection
Feed approximate values see → **Page 54**

Cutting data standard values – Hole depth 10xD

Index	10 224 ... Type NC-TiALN		10 270 ... Type UNI-TiN		10 225 ... Type WTL		10 210 ... Type WTL-TiN	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	41	7	**41**	6	**29**	6	29	6
P.1.2	34	6	**35**	5	**25**	5	25	5
P.1.3	30	6	**31**	5	**22**	5	22	5
P.1.4	28	6	**29**	5	**20**	5	20	5
P.1.5	24	6	**25**	5	**17**	5	17	5
P.2.1	25	5	**31**	5	**18**	5	18	5
P.2.2	17	4	**22**	4	**12**	4	12	4
P.2.3	15	4	**19**	4	**11**	4	11	4
P.2.4	14	3	**17**	3	**10**	3	10	3
P.3.1	19	5	**16**	4	**13**	4	13	4
P.3.2			**12**	3	**10**	3	10	3
P.3.3			**10**	2	**8**	3	8	3
P.4.1	13	4	**16**	4	**9**	3		
P.4.2	12	3	**15**	3	**9**	2		
M.1.1	12	4	**13**	4	8	3		
M.2.1	8	3	**8**	3	2	2		
M.3.1			**9**	3				
K.1.1	**43**	7	**37**	6	**31**	6	**31**	6
K.1.2	**35**	7	**30**	6	**25**	6	**25**	6
K.2.1	**37**	7	**32**	6	**26**	6	**26**	6
K.2.2	**28**	6	**24**	5	**20**	5	**20**	5
K.3.1	**37**	7	**32**	6	**26**	6	**26**	6
K.3.2	**28**	6	**24**	5	**20**	5	**20**	5
N.1.1					**62**	7		
N.1.2					**62**	7		
N.2.1	72	7	67	6	**52**	6	52	6
N.2.2	58	6	54	5	**41**	5	41	5
N.2.3	51	6	47	5	**36**	5	36	5
N.3.1	87	6	62	5	**62**	5	62	5
N.3.2	52	5	37	4	**37**	4	37	4
N.3.3	70	5	50	4	**50**	4	50	4
N.4.1	50	6	50	6	**50**	6	50	5
S.1.1					6	2		
S.1.2					5	1		
S.2.1					5	2		
S.2.2					3	1		
S.2.3					4	1		
S.3.1			8	2	5	2		
S.3.2			5	1	3	1		
S.3.3								
H.1.1					4	1		
H.1.2								
H.1.3								
H.1.4								
H.2.1					8	3		
H.3.1								
O.1.1	29	6	26	4	21	4	21	4
O.1.2	29	6	26	4	21	4	21	4
O.2.1	29	6	26	4	21	4	21	4
O.2.2	29	6	26	4	21	4	21	4
O.3.1								

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Index	10 200 ... Type WTW		10 295 ... Type N-MK		10 297 ... Type WTL-MK	
	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1			25	6	**29**	6
P.1.2			21	5	**25**	5
P.1.3			19	5	**22**	5
P.1.4			18	5	**20**	5
P.1.5			15	5	**17**	5
P.2.1			15	4	**18**	5
P.2.2			11	3	**12**	4
P.2.3			9	3	**11**	4
P.2.4			8	2	**10**	3
P.3.1			12	4	**13**	4
P.3.2					**10**	3
P.3.3					**8**	3
P.4.1					**9**	3
P.4.2					**9**	2
M.1.1					8	3
M.2.1					2	2
M.3.1						
K.1.1			**27**	6	**31**	6
K.1.2			**22**	6	**25**	6
K.2.1			**23**	6	**26**	6
K.2.2			**18**	5	**20**	5
K.3.1			**23**	6	**26**	6
K.3.2			**18**	5	**20**	5
N.1.1	**72**	7			**62**	7
N.1.2	**72**	7			**62**	7
N.2.1			45	6	**52**	6
N.2.2			36	5	**41**	5
N.2.3			32	5	**36**	5
N.3.1			54	5	**62**	5
N.3.2			32	4	**37**	4
N.3.3			43	4	**50**	4
N.4.1			60	6	**50**	6
S.1.1					6	2
S.1.2					5	1
S.2.1					5	2
S.2.2					3	1
S.2.3					4	1
S.3.1					5	2
S.3.2					3	1
S.3.3						
H.1.1					4	1
H.1.2						
H.1.3						
H.1.4						
H.2.1					8	3
H.3.1						
O.1.1			18	5	21	4
O.1.2			18	5	21	4
O.2.1			18	5	21	4
O.2.2			18	5	21	4
O.3.1						

When drilling tough materials which tend to jam, chips should be removed at drilling depth ≥ 4xD and the cutting speed v_c should be reduced as follows: at drilling depths > 4xD by 10 %, at drilling depths > 6xD by 15–20 %.
It is also recommended to use an emulsion for cooling.

v_c = Cutting speed in m/min.
F = Factor for feed selection
Feed approximate values see → **Page 54**

Cutting data standard values – hole depth greater than 10xD

Index	10 235 ... Type WTL-R1		10 245 ... Type WTL-R2		10 255 ... Type WTL-R3		10 236 ... Type WTL-TiAlN-R1	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	21	5	21	5	21	5	24	5
P.1.2	18	4	18	4	18	4	21	4
P.1.3	16	4	16	4	16	4	18	4
P.1.4	15	4	15	4	15	4	17	4
P.1.5	13	4	13	4	13	4	14	4
P.2.1	13	4	13	4	13	4	15	4
P.2.2	9	3	9	3	9	3	10	3
P.2.3	8	3	8	3	8	3	9	3
P.2.4	7	2	7	2	7	2	8	2
P.3.1	10	3	10	3	10	3	11	3
P.3.2	7	2	7	2	7	2	8	2
P.3.3	6	2	6	2	6	2	7	2
P.4.1								
P.4.2								
M.1.1								
M.2.1								
M.3.1								
K.1.1	23	5	23	5	23	5	26	5
K.1.2	18	5	18	5	18	5	21	5
K.2.1	19	5	19	5	19	5	22	5
K.2.2	15	4	15	4	15	4	17	4
K.3.1	19	5	19	5	19	5	22	5
K.3.2	15	4	15	4	15	4	17	4
N.1.1	45	6	45	6	45	6	52	6
N.1.2	45	6	45	6	45	6	52	6
N.2.1	38	5	38	5	38	5	43	5
N.2.2	30	4	30	4	30	4	35	4
N.2.3	26	4	26	4	26	4	30	4
N.3.1	45	4	45	4	45	4	52	4
N.3.2	27	3	27	3	27	3	31	3
N.3.3	36	3	36	3	36	3	41	3
N.4.1	55	5	55	5	55	5	60	6
S.1.1								
S.1.2								
S.2.1								
S.2.2								
S.2.3								
S.3.1								
S.3.2								
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1	15	3	15	3	15	3	17	3
O.1.2	15	3	15	3	15	3	17	3
O.2.1	15	3	15	3	15	3	17	3
O.2.2	15	3	15	3	15	3	17	3
O.3.1								

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Index	10 246 ... Type WTL-TiAlN-R2		10 256 ... Type WTL-TiAlN-R3		10 305 ... Type WTL-MK-R1		10 315 ... Type WTL-MK-R2	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	24	5	24	5	21	5	21	5
P.1.2	21	4	21	4	18	4	18	4
P.1.3	18	4	18	4	16	4	16	4
P.1.4	17	4	17	4	15	4	15	4
P.1.5	14	4	14	4	13	4	13	4
P.2.1	15	4	15	4	13	4	13	4
P.2.2	10	3	10	3	9	3	9	3
P.2.3	9	3	9	3	8	3	8	3
P.2.4	8	2	8	2	7	2	7	2
P.3.1	11	3	11	3	10	3	10	3
P.3.2	8	2	8	2	7	2	7	2
P.3.3	7	2	7	2	6	2	6	2
P.4.1								
P.4.2								
M.1.1								
M.2.1								
M.3.1								
K.1.1	26	5	26	5	23	5	23	5
K.1.2	21	5	21	5	18	5	18	5
K.2.1	22	5	22	5	19	5	19	5
K.2.2	17	4	17	4	15	4	15	4
K.3.1	22	5	22	5	19	5	19	5
K.3.2	17	4	17	4	15	4	15	4
N.1.1	52	6	52	6	45	6	45	6
N.1.2	52	6	52	6	45	6	45	6
N.2.1	43	5	43	5	38	5	38	5
N.2.2	35	4	35	4	30	4	30	4
N.2.3	30	4	30	4	26	4	26	4
N.3.1	52	4	52	4	45	4	45	4
N.3.2	31	3	31	3	27	3	27	3
N.3.3	41	3	41	3	36	3	36	3
N.4.1	60	6	60	6	55	5	55	5
S.1.1								
S.1.2								
S.2.1								
S.2.2								
S.2.3								
S.3.1								
S.3.2								
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1	17	3	17	3	15	3	15	3
O.1.2	17	3	17	3	15	3	15	3
O.2.1	17	3	17	3	15	3	15	3
O.2.2	17	3	17	3	15	3	15	3
O.3.1								

When drilling tough materials which tend to jam, chips should be removed at drilling depth ≥ 4xD and the cutting speed v_c should be reduced as follows: at drilling depths > 4xD by 10 %, at drilling depths > 6xD by 15–20 %.
It is also recommended to use an emulsion for cooling.

v_c = Cutting speed in m/min.
F = Factor for feed selection
Feed approximate values see → **Page 54**

Cutting data standard values – micro drills

Index	v_c m/min	10 103 ...						
		Ø 0,15	Ø 0,20–0,25	Ø 0,30–0,35	Ø 0,40–0,55	Ø 0,60–0,75	Ø 0,80–0,95	Ø 1,00–1,45
		f (mm/rev)						
P.1.1	33	0,009	0,011	0,015	0,019	0,026	0,031	0,050
P.1.2	28	0,007	0,009	0,011	0,014	0,020	0,024	0,041
P.1.3	25	0,007	0,009	0,011	0,014	0,020	0,024	0,041
P.1.4	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
P.1.5	20	0,007	0,009	0,011	0,014	0,020	0,024	0,041
P.2.1	20	0,005	0,007	0,009	0,011	0,015	0,020	0,035
P.2.2	14	0,004	0,005	0,007	0,008	0,012	0,016	0,029
P.2.3	12	0,004	0,005	0,007	0,008	0,012	0,016	0,029
P.2.4	11	0,003	0,004	0,005	0,007	0,009	0,013	0,024
P.3.1	15	0,005	0,007	0,009	0,011	0,015	0,020	0,035
P.3.2	11	0,004	0,005	0,007	0,008	0,012	0,016	0,029
P.3.3	10	0,004	0,005	0,007	0,008	0,012	0,016	0,029
P.4.1	11	0,004	0,005	0,007	0,008	0,012	0,016	0,029
P.4.2	10	0,003	0,004	0,005	0,007	0,009	0,013	0,024
M.1.1	9	0,004	0,005	0,007	0,008	0,012	0,016	0,029
M.2.1	8	0,004	0,005	0,007	0,008	0,012	0,016	0,029
M.3.1								
K.1.1	35	0,009	0,011	0,015	0,019	0,026	0,031	0,050
K.1.2	28	0,009	0,011	0,015	0,019	0,026	0,031	0,050
K.2.1	30	0,009	0,011	0,015	0,019	0,026	0,031	0,050
K.2.2	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
K.3.1	30	0,009	0,011	0,015	0,019	0,026	0,031	0,050
K.3.2	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
N.1.1	70	0,012	0,014	0,019	0,024	0,034	0,038	0,060
N.1.2	70	0,012	0,014	0,019	0,024	0,034	0,038	0,060
N.2.1	59	0,009	0,011	0,015	0,019	0,026	0,031	0,050
N.2.2	47	0,007	0,009	0,011	0,014	0,020	0,024	0,041
N.2.3	41	0,007	0,009	0,011	0,014	0,020	0,024	0,041
N.3.1	70	0,007	0,009	0,011	0,014	0,020	0,024	0,041
N.3.2	42	0,005	0,007	0,009	0,011	0,015	0,020	0,035
N.3.3	56	0,005	0,007	0,009	0,011	0,015	0,020	0,035
N.4.1	42	0,007	0,009	0,011	0,014	0,020	0,024	0,041
S.1.1	7	0,003	0,004	0,005	0,007	0,009	0,013	0,024
S.1.2	6	0,002	0,003	0,004	0,005	0,007	0,010	0,020
S.2.1	6	0,003	0,004	0,005	0,007	0,009	0,013	0,024
S.2.2	4	0,002	0,003	0,004	0,005	0,007	0,010	0,020
S.2.3	4	0,002	0,003	0,004	0,005	0,007	0,010	0,020
S.3.1	6	0,003	0,004	0,005	0,007	0,009	0,013	0,024
S.3.2	4	0,002	0,003	0,004	0,005	0,007	0,010	0,020
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
O.1.2	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
O.2.1	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
O.2.2	23	0,007	0,009	0,011	0,014	0,020	0,024	0,041
O.3.1								

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting data standard values – NC spot drills, Centre drills, Core drills, Stepped drills

Index	10 510 ... / 10 520 ... / 10 521 ... / 10 526 ... / 10 525 ...		10 512 ... / 10 522 ... / 10 513 ... / 10 523 ... / 10 532 ... / 10 528 ...		10 480 ... / 10 415 ... / 10 435 ... / 10 445 ... / 10 455 ... / 10 475 ...		10 425 ...		10 228 ... / 10 365 ... / 10 355 ... / 10 320 ... / 10 330 ... / 10 375 ... / 10 340 ... / 10 405 ... / 10 350 ...	
	Type NC-A		Type NC-A TiN		Type ZB		Type ZB TiN		Type N / SB / SB vap.	
	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F	v_c m/min	F
P.1.1	28	6	32	6	28	6	32	6	28	6
P.1.2	24	5	27	5	24	5	27	5	24	5
P.1.3	24	5	27	5	24	5	27	5	24	5
P.1.4	20	5	23	5	20	5	23	5	20	5
P.1.5	17	5	19	5	17	5	19	5	17	5
P.2.1	17	4	20	4	17	4	20	4	17	4
P.2.2	12	3	14	3	12	3	14	3	12	3
P.2.3	10	3	12	3	10	3	12	3	10	3
P.2.4	9	2	11	2	9	2	11	2	9	2
P.3.1	13	4	15	4	13	4	15	4	13	4
P.3.2	13	4	15	4	13	4	15	4	13	4
P.3.3										
P.4.1	9	3	10	3	9	3	10	3	9	3
P.4.2	8	2	9	2	9	2	10	2	9	2
M.1.1	8	3	9	3	8	3	9	3	8	3
M.2.1	7	2	8	2	7	2	9	2	7	2
M.3.1	7	2	8	2	6	2	7	2	6	2
K.1.1	30	6	35	6	30	6	35	6	30	6
K.1.2	24	6	28	6	24	6	28	6	24	6
K.2.1	26	6	29	6	26	6	29	6	26	6
K.2.2	20	5	22	5	20	5	22	5	20	5
K.3.1	26	6	29	6	26	6	29	6	26	6
K.3.2	20	5	22	5	20	5	22	5	20	5
N.1.1	60	6	65	6	60	7	65	7	60	7
N.1.2	60	6	65	6	60	7	65	7	60	7
N.2.1	50	6	58	6	50	6	58	6	50	6
N.2.2	40	5	46	5	40	5	46	5	40	5
N.2.3	35	5	40	5	35	5	40	5	35	5
N.3.1	60	5	69	5	60	5	69	5	60	5
N.3.2	36	4	41	4	36	4	41	4	36	4
N.3.3	48	4	55	4	48	4	55	4	48	4
N.4.1	20	5	23	5	20	5	23	5	20	5
S.1.1	6	2	7	2	6	2	7	2	6	2
S.1.2	5	1	6	1	5	1	6	1	5	1
S.2.1	5	2	6	2	5	2	6	2	5	2
S.2.2	3	1	3	1	3	1	3	1	3	1
S.2.3	4	1	4	1	4	1	4	1	4	1
S.3.1	5	2	6	2	5	2	6	2	5	2
S.3.2	3	1	4	1	3	1	4	1	3	1
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1	20	5	23	5	20	5	23	5	20	5
O.1.2	20	5	23	5	20	5	23	5	20	5
O.2.1										
O.2.2	20	5	23	5	20	5	23	5	20	5
O.3.1										

When drilling tough materials which tend to jam, chips should be removed at drilling depth ≥ 4xD and the cutting speed v_c should be reduced as follows: at drilling depths > 4xD by 10 %, at drilling depths > 6xD by 15–20 %.
It is also recommended to use an emulsion for cooling.

v_c = Cutting speed in m/min.
F = Factor for feed selection
Feed approximate values see → **Page 54**

Feed rate guide values for HSS twist drills

Factor F	Drill diameter in mm															
	0,5	1	2	3	4	5	6	8	10	12	14	16	18	20	26	30
	Feed rate f in mm/rev.															
1	0,004	0,006	0,02	0,03	0,04	0,04	0,05	0,06	0,08	0,08	0,09	0,1	0,12	0,15	0,18	0,19
2	0,006	0,008	0,02	0,03	0,05	0,05	0,05	0,08	0,1	0,1	0,1	0,12	0,12	0,2	0,2	0,2
3	0,007	0,012	0,03	0,05	0,06	0,069	0,08	0,1	0,12	0,13	0,13	0,16	0,16	0,25	0,25	0,25
4	0,008	0,014	0,04	0,06	0,08	0,09	0,1	0,14	0,16	0,16	0,16	0,2	0,2	0,3	0,3	0,3
5	0,01	0,016	0,06	0,08	0,1	0,12	0,13	0,16	0,2	0,2	0,22	0,25	0,25	0,4	0,4	0,4
6	0,012	0,018	0,06	0,1	0,12	0,14	0,16	0,2	0,25	0,25	0,25	0,3	0,3	0,5	0,5	0,5
7	0,014	0,02	0,08	0,13	0,16	0,18	0,2	0,25	0,35	0,35	0,35	0,4	0,4	0,6	0,6	0,6
8	0,016	0,023	0,1	0,16	0,2	0,2	0,25	0,35	0,4	0,4	0,4	0,4	0,5	0,6	0,7	0,8
9	0,019	0,025	0,13	0,17	0,2	0,23	0,32	0,4	0,4	0,5	0,5	0,5	0,6	0,8	0,9	0,9

All the indicated data are guide values only and represent average values.

Speed for HSS drills

v_c m/min	Drill diameter in mm															
	2,0	2,5	3,15	4,0	5,0	6,3	8,0	10,0	12,5	16,0	20,0	25,0	31,5	40,0	50,0	63,0	80,0
	Speed in U/min																
80	12.500	10.000	8.000	6.300	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320
63	10.000	8.000	6.300	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250
50	8.000	6.300	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200
40	6.300	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200	160
32	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200	160	125
25	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200	160	125	100
20	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200	160	125	100	80
16	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200	160	125	100	80	63
12	2.000	1.600	1.250	1.000	800	630	500	400	320	250	200	160	125	100	80	63	50
10	1.600	1.250	1.000	800	630	500	400	320	250	200	160	125	100	80	63	50	40
8	1.250	1.000	800	630	500	400	320	250	200	160	125	100	80	63	50	40	32
6	1.000	800	630	500	400	320	250	200	160	125	100	80	63	50	40	32	25
5	800	630	500	400	320	250	200	160	125	100	80	63	50	40	32	25	20
4	630	500	400	320	250	200	160	125	100	80	63	50	40	32	25	20	16
3	500	400	320	250	200	160	125	100	80	63	50	40	32	25	20	16	12

Peck frequency for deep drilling

- Cutting edge needs to be sufficiently cooled; this is achieved by removing chips from the hole
- Chip removal frequency depends on the material to be machined, the hole depth and the drill type used
- Using a drill with a flat flute profile (WTL) significantly improves chip transport, which makes it possible to reduce the number of chip removal processes
- When drilling into tough materials and materials that tend to jam, chips should be removed for hole depths ≥ 4xD and the cutting speed v_c reduced as follows: by 10% for hole depths > 4xD, by 15-20% for hole depths > 6xD. It is also recommended to cool using emulsion.
- In the case of deep holes and to improve the positional accuracy, it is recommended to bore a pilot/centring hole.
- Drills with coolant holes and a thro' coolant supply are recommended for extremely deep holes or horizontal drilling applications

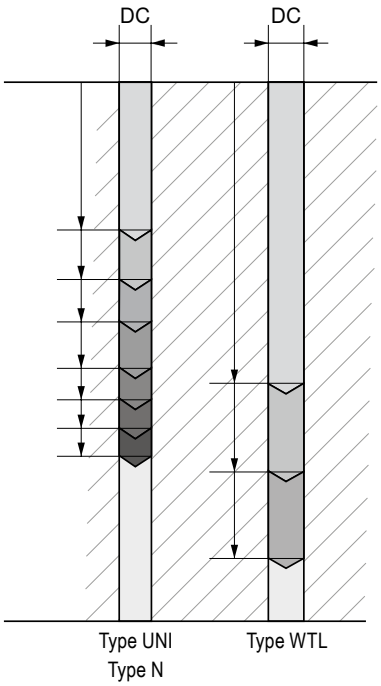

Coatings

TiN
- TiN coating
- Maximum application temperature: 450°C

TiAlN
- TiAlN multilayer coating
- Maximum application temperature: 900°C

vap.
- Vaporised
- Vaporisation (vapour-deposition) prevents cold welds from forming on the tool and increases the surface hardness and thus the wear resistance

F.-nit
- Titanium carbon nitride based PVD coating particularly suitable for steel machining
- Applicable up to approx. 450°C

Cutting materials

HSS
- Conventional high speed steel
- Universal cutting material

HSS-E
- Cobalt-alloyed high speed steel
- Cutting material with increased elevated-temperature hardness and heat resistance as well as wear resistance
- Suitable for high cutting temperatures and difficult-to-machine materials

HSS-E-PM
- Cobalt-alloyed high speed steel, produced using powder metallurgy
- Cutting material with a very tight and homogeneous structure
- High hardness, heat resistance and wear resistance

New products for machining technicians

NEW WPC – Change

≤ 3xD | ≤ 5xD

▲ The new modular WPC Change drilling system with replaceable cutting heads and thro' coolant enables cost-effective machining of even large holes with the performance of solid carbide drills. The drilling system is also characterised by its easy handling.

▲ Replaceable cutting head type UNI with wear-resistant TPX74S coating for usage on steel and cast iron materials.

→ Page 104+105

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Toolfinder	5–7
List of contents	8–12
Product programme	13–107
Technical Information:	
Cutting Data	108–157
Type overview	158
Application notes: WTX drill, WTX – Change / WPC Change, WPC – Change, deep hole twist and micro drill	159–164
Coatings	165

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Shank

Plain cylindrical shank

Cylindrical shank with lateral driving face „Weldon“

Cylindrical shank with angled clamping flat „Whistle Notch“

Cylindrical shank with lateral driving face (similar to ISO 9766)

Tool types

HFDS

An explanation of the tool types can be found on → **Page 158**.

Version

Int. coolant supply

self-centering

▲ Pilot hole necessary
▲ min. 2xD

● = **Main Application**
○ = Extended application

Recommended application – WTX Performance Tools

● = Main Application
○ = Extended application

	WTX – Type	Solid drilling	Flat bottom hole	High-feed machining	High speed machining	Stack plate drilling	Drilling through a transverse hole	Angled hole entrance	Angled drill exit	Drilling a precise fit	deep holes	miniature holes
Monobloc Tool	WTX – UNI	●				●	●					
	WTX – Speed UNI	●			●	●						
	WTX – HFDS	●		●		●	●					
	WTX – Feed UNI	●		●		●	●	●	●			
	WTX – Speed VA	●			●							
	WTX – VA	●										
	WTX – Ti	●					●					
	WTX – AL	●										
	WTX – 180	●	●				●	●	●			
	WTX – Quattro 4F	●							○			
	WTX – Feed BR	●		●		○	○	○	○	●		
	WTX – H	●										
	WTX – TB	●									●	
	WTX – Micro	●									●	●
	WTX – Mini	●										●
Modular	WTX – Change Feed UNI	●		●				●	●			
	WTX – Change Drill heads	●										

Coolant diagram

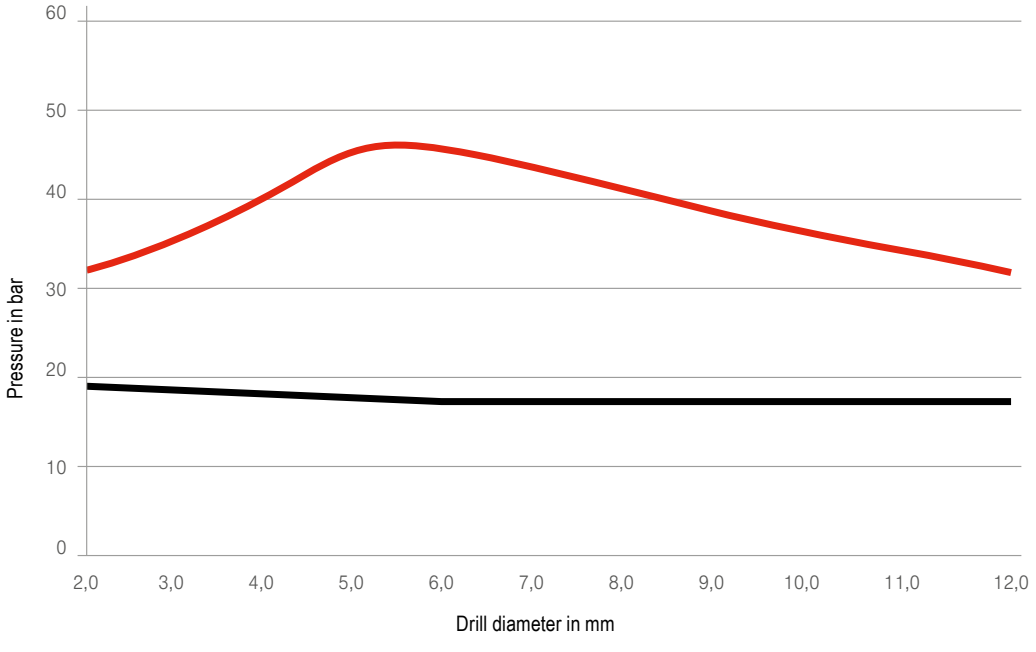

Recommended coolant pressure
Minimum coolant Pressure

Additional application criteria for WTX drills can be found on → **page 159.**

Toolfinder

	Product name	Tool type	Description	Int. coolant supply	Replaceable cutting heads	1xD	3xD	5xD	8xD	12xD	Video
Steel/Universal	**Solid carbide drilling**										
	WTX	UNI	▲ highest performance for all materials up to 1200 N/mm² ▲ suitable for volume production	✗ ✓			13–17 24–27	36–39 42–46	60–63		▶
		UNI	▲ Quality tool for standard applications ▲ Attractive price-performance ratio	✗ ✓			18–21 28–31	40 51–54	64	72	▶
	WTX	Speed UNI	▲ High-performance drill for high cutting speeds ▲ Innovative DPX14S Dragonskin ▲ New cutting edge geometry	✓			24–27	42–46	60–63		▶
	WTX	HFDS	▲ High-feed drill with four cutting edges ▲ Innovative cutting edge geometry enables maximum positioning accuracy ▲ Optimal cooling with four spiral coolant holes	✓			35	59			▶
	WTX	Feed UNI	▲ High-feed drill with three cutting edges ▲ Suitable for difficult drilling applications ▲ High positioning accuracy	✓				58	68	73	▶
	WTX	Quattro 4F	▲ with additional guide land for best alignment accuracy, concentricity and positional accuracy	✓				42–46	60–63	69–71	
	WTX	180	▲ for inclined surfaces up to 45° and flat bottom holes	✓			34	57			
		N	▲ uncoated solid carbide drills ▲ universal application	✗			23	41			
	Mini-drill										
	WTX	MINI	▲ Available from Ø 0.1 mm ▲ Standard shank Ø 3.0 mm for use in heat shrink adapters	✗				78			
	WTX	MICRO	▲ Universal high-performance micro drill ▲ Specialised geometry and coating ▲ WTX – Micro (5xD) pilot drill for deep hole twist drill	✓				79	79	80	▶
	Drill Reamers										
	WTX	Feed BR/ BR100	▲ solid carbide high performance drill reamer ▲ excellent surface quality ▲ for blind and through holes	✓			83+85	84+85			
	Stepped drills										
	WTX	SB	▲ Solid carbide short step drill for core hole plus countersink for thread cutting and thread forming	✗ ✓			86 87				
	NC Spot Drill										
		NC-A	▲ spiral fluted ▲ 90°, 120°, 142°	✗		88+89					
	Centre drills										
		ZB	▲ spiral fluted ▲ 120°	✗		90					
	Drill with replaceable cutting heads										
	WTX	Change Feed UNI	▲ three-edged exchangeable head drill with solid carbide drill head type Feed UNI from Ø 14.0 mm to 32.0 mm ▲ universal application (steel, cast iron)	✓	91+92		93	93	94		▶
	WTX	Change UNI	▲ exchangeable head drill with type UNI solid carbide drill head from Ø 12.0 mm to 41.0 mm ▲ for steels <700 N/mm²	✓	95–100	101	101	102	102	103	▶
	WTX	Change P	▲ exchangeable head drill with type P solid carbide drill head from Ø 12.0 mm to 41.0 mm ▲ for steels >700 N/mm²	✓	95–100	101	101	102	102	103	▶
	WPC	Change UNI	▲ Indexable insert drill with solid carbide indexable insert type UNI from Ø 14.0 to 30.0 mm ▲ Universal application on steel and cast iron materials	✓	104		105	105			
	Exchangeable head NC spot drill										
		NC-A	▲ NC spot drill – exchange head system ▲ 90°, 120°, 142°	✗	107						

✗ = without through coolant | ✓ = with thro' coolant

Toolfinder

	Product name	Tool type	Description	Int. coolant supply	Replaceable cutting heads	1xD	3xD	5xD	8xD	12xD	Video
Stainless steel	**Solid carbide drilling**										
	WTX	VA	▲ highest performance for corrosion and acid resistant steels and aluminium ▲ for volume production	✗ ✓			13–17 24–27	36–39 47–50	 65–67		
		VA	▲ Quality tool for corrosion-resistant and acid-resistant steels and aluminium ▲ Attractive price-performance ratio	✗ ✓			18–21 28–31	 51–54			
	WTX	Speed VA	▲ double the cutting speed in corrosion and acid-resistant steels and aluminum	✓				47–50		69–71	
	Drill with replaceable cutting heads										
	WTX	Change VA	▲ exchangeable head drill with solid carbide drill head type VA from Ø 12.0 mm to 32.0 mm	✓	95–100	101	101	102	102	103	▶
Cast iron	**Solid carbide drilling**										
	WTX	UNI	▲ highest performance for all materials up to 1200 N/mm² ▲ suitable for volume production	✗ ✓			13–17 24–27	36–39 42–46	 60–63		▶
	Drill with replaceable cutting heads										
	WTX	Change GG	▲ exchangeable head drill with solid carbide drill head type GG from Ø 12.0 mm to 32.0 mm	✓	95–100	101	101	102	102	103	▶
Non-ferrous metals	**Solid carbide drilling**										
	WTX	AL	▲ solid carbide high performance drill, especially for the machining of aluminum, copper and brass ▲ for volume production	✓				47–50	65–67	69–71	
	Drill with replaceable cutting heads										
	WTX	Change AL	▲ exchangeable head drill with solid carbide drill head type AL from Ø 12.0 mm to 32.0 mm	✓	95–100	101	101	102	102	103	▶
Heat-resistant	**Solid carbide drilling**										
	WTX	Ti	▲ highest performance in titanium, titanium alloys and heat resistant alloys	✓			32+33	55+56			
Tempered steel	**Solid carbide drilling**										
	WTX	H	▲ highest performance in hardened steel from 46 to 70 HRC	✗			22				▶

	Product name	Tool type	Description	Int. coolant supply	16xD	20xD	25xD	30xD	40xD	50xD	Video
	Deep Hole Drills										
Steel/Universal	WTX	MICRO	▲ Available from Ø 0.8 mm ▲ Universal high-performance micro deep hole twist drill ▲ Specialised geometry and coating ▲ Hole depths up to 30xD possible	✓	80	81	81	82			▶
	WTX	CP 20 UNI	▲ Ensures an even safer deep hole drilling process ▲ Excellent alignment precision ▲ For optimal guidance of the deep hole twist drill for hole depths > 30xD	✓		74					
	WTX	TB UNI	▲ solid carbide deep hole drill to 50xD without peck ▲ 4 facet geometry for excellent alignment accuracy	✓	75	75	76	76	77	77	
Non-ferrous metals	WTX	TB ALU	▲ solid carbide deep hole drills, up to 30xD without pecking ▲ 6-facet head geometry for excellent alignment accuracy	✓	75	75	76	76			

✗ = without through coolant | ✓ = with thro' coolant

Overview Solid Carbide Drills

	Product name	Tool type	Boring depth	Diameter in mm Ø DC	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metals	S Heat-resistant	H Tempered steel	O Non metal materials		coated ■	uncoated □	WNT \ Performance / WNT \ Standard Page No.
3xD without thro' coolant															
	WTX	UNI	≤ 3xD	3–25	●		●			○			■		13–17
	WTX	VA	≤ 3xD	2–20	○	●	○	○	●				■		13–17
		UNI	≤ 3xD	1–20	●		●						■		18–21
		VA	≤ 3xD	1–20	○	●		○	○		○		■		18–21
	WTX	H	≤ 3xD	2,55–14	○		●			●		up to 70 HRC	■		22
		N	≤ 3xD	0,5–20	○		●	●	○					□	23
3xD with thro' coolant															
	WTX	Speed UNI	≤ 3xD	3–20	●	●	●						■		24–27
	WTX	UNI	≤ 3xD	3–25	●		●			○			■		24–27
	WTX	VA	≤ 3xD	3–20	○	●	○	○	●				■		24–27
		UNI	≤ 3xD	1–20	●	●	●	○					■		28–31
		VA	≤ 3xD	1–20	○	●		●	○		○		■		28–31
	WTX	Ti	≤ 3xD	3–20	○	●			●				■		32+33
	WTX	180	≤ 3xD	3–20	●	●	●					180° Point angle	■		34
	WTX	HFDS	≤ 3xD	6–16	●	○	●	○			○	4 flute	■		35
5xD without thro' coolant															
	WTX	UNI	≤ 5xD	3–20	●		●			○			■		36–39
	WTX	VA	≤ 5xD	3–20	○	●	○	○	●				■		36–39
		UNI	≤ 5xD	3–20	●		●						■		40
		N	≤ 5xD	0,5–16	○		●	●	○					□	41

Overview Solid Carbide Drills

	Product name	Tool type	Boring depth	Diameter in mm Ø DC	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metals	S Heat-resistant	H Tempered steel	O Non metal materials		coated ■	uncoated □	WNT \ Performance / WNT \ Standard Page No.
5xD with thro' coolant															
	WTX	Speed UNI	≤ 5xD	3–18	●	●	●						■		42–46
	WTX	UNI	≤ 5xD	3–25	●		●				○		■		42–46
	WTX	Quattro 4F	≤ 5xD	3–18	●		●				○		■		42–46
	WTX	Speed VA	≤ 5xD	3–20	●	●	●	○	●				■		47–50
	WTX	VA	≤ 5xD	3–20	○	●	○	○	●				■		47–50
	WTX	AL	≤ 5xD	2,5–20				●					■		47–50
		UNI	≤ 5xD	1–20	●	●	●	○					■		51–54
		VA	≤ 5xD	1–20	○	●		●	○		○		■		51–54
	WTX	Ti	≤ 5xD	3–20	○	●			●				■		55+56
	WTX	180	≤ 5xD	3–20	●	●	●					180° Point angle	■		57
	WTX	Feed UNI	≤ 5xD	4–20	●	●	●	○				3 flute	■		58
	WTX	HFDS	≤ 5xD	6–16	●	○	●	○			○	4 flute	■		59
8xD with thro' coolant															
	WTX	Speed UNI	≤ 8xD	3–18	●	●	●						■		60–63
	WTX	UNI	≤ 8xD	3–20	●		●				○		■		60–63
	WTX	Quattro 4F	≤ 8xD	3–18	●		●				○		■		60–63
		UNI	≤ 8xD	3–20	●	●	●						■		64
	WTX	VA	≤ 8xD	3–20	○	●	○	○	●				■		65–67
	WTX	AL	≤ 8xD	3–20				●					■		65–67
	WTX	Feed UNI	≤ 8xD	4–20	●	●	●	○				3 flute	■		68

Overview Solid Carbide Drills

	Product name	Tool type	Boring depth	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non metal materials O		coated ■	uncoated □	WNT \ Performance Page No.	WNT \ Standard
12xD with thro' coolant																
	WTX	Speed VA	≤ 12xD	3 – 17,5	●	●	●	○	●				■		69–71	
	WTX	Quattro 4F	≤ 12xD	3 – 18	●		●			○			■		69–71	
	WTX	AL	≤ 12xD	3 – 20				●					■		69–71	
		UNI	≤ 12xD	3 – 20	●	●	●						■			72
	WTX	Feed UNI	≤ 12xD	4 – 20	●	●	●	○				3 flute	■		73	
Deep hole twist drill 16xD to 50xD																
	WTX	CP 20 UNI	≤ 20xD	3 – 9	●	●	●		○			Co-pilot drill	■		74	
	WTX	TB UNI	≤ 16xD ≤ 20xD	2 – 12	●	●	●		○				■		75	
	WTX	TB UNI	≤ 25xD ≤ 30xD	2 – 12	●	●	●		○				■		76	
	WTX	TB UNI	≤ 40xD	3 – 9	●	●	●		○				■		77	
	WTX	TB UNI	≤ 50xD	3 – 6,8	●	●	●		○				■		77	
	WTX	TB ALU	≤ 16xD ≤ 20xD	2 – 12				●					■		75	
	WTX	TB ALU	≤ 25xD ≤ 30xD	2 – 12				●					■		76	

Overview Solid Carbide Drills

	Product name	Tool type	Boring depth	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non metal materials O		coated ■	uncoated □	WNT \ Performance / WNT \ Standard	Page No.
Micro drill 5xD to 30xD																
	WTX	MINI	≤ 5xD	0,1 – 2,9	○		●	●	○				■			78
	WTX	MICRO	≤ 5xD	0,8 – 2,9	●	●	●		○			with thro' coolant	■			79
	WTX	MICRO	≤ 8xD	0,8 – 2,9	●	●	●		○			with thro' coolant	■			79
	WTX	MICRO	≤ 12xD	0,8 – 2,9	●	●	●		○			with thro' coolant	■			80
	WTX	MICRO	≤ 16xD	0,8 – 2,9	●	●	●					with thro' coolant	■			80
	WTX	MICRO	≤ 20xD	0,8 – 2,9	●	●	●					with thro' coolant	■			81
	WTX	MICRO	≤ 25xD	0,8 – 2,9	●	●	●					with thro' coolant	■			81
	WTX	MICRO	≤ 30xD	0,8 – 2,9	●	●	●					with thro' coolant	■			82
Drill Reamers																
	WTX	Feed BR100	≤ 3xD ≤ 5xD	3,97 – 12,02	●	●	●					1/100 3 flute	■			83+84
	WTX	Feed BR	≤ 3xD	4 – 16	●	●	●					Tolerance H7 3 flute	■			85
	WTX	Feed BR	≤ 5xD	4 – 20	●	●	●					Tolerance H7 3 flute	■			85
Stepped drills																
	WTX	SB		2,5 – 14	●		●				○	Thread cutting	■			86
	WTX	SB		2,8 – 15	●		●				○	Thread forming	■			86
	WTX	SB		3,3 – 14	●		●				○	Thread cutting with thro' coolant	■			87
	WTX	SB		3,7 – 15	●		●				○	Thread forming with thro' coolant	■			87

Overview Solid Carbide Drills

	Product name	Tool type	Point angle SIG	Diameter in mm Ø DC	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metals	S Heat-resistant	H Tempered steel	O Non metal materials		■ coated	□ uncoated	WNT \ Performance / WNT \ Standard Page No.
NC Spot Drill															
		NC–A	90° 120° 142°	2–20	●		●	●						□	88
		NC–A	90° 120° 142°	2–20	●		●	●			○		■		88
		NC–A	90° 120° 142°	3–16	●		●	●			○	long version	■		89
Centre drills															
		ZB	120°	0,5–6,3	●		●	●						□	90
Drill with replaceable cutting heads															
Replaceable cutting heads															
	WTX	Change Feed		14–32	●		●					3 Edges	■		91+92
	WTX	Change UNI		12–41	●		●						■		95–100
	WTX	Change P		12–41	●		●						■		95–100
	WTX	Change VA		12–32	○	●	●		●				■		95–100
	WTX	Change GG		12–32			●						■		95–100
	WTX	Change ALU		12–32				●					■		95–100
	WPC	Change UNI		14–30	●		●						■		104
Tool holder															
	WTX	Change Feed		14–32								3xD / 5xD / 8xD			93+94
	WTX	Change		12–41								1xD / 3xD / 5xD / 8xD / 12xD			101–103
	WPC	Change		14–30								3xD / 5xD			105
MultiChange NC spot drill															
		NC–A	90° 120° 142°	8–20	●	●	●	●					■		107

WTX – High Performance Drill, DIN 6537



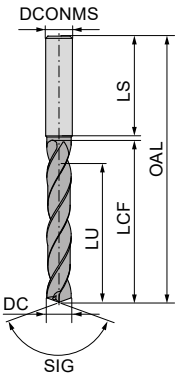

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 777 ... EUR T7		11 778 ... EUR T7		11 776 ... EUR T7		10 731 ... EUR T5	
2,00	6	58	16	11	36							48,37	020
2,10	6	58	16	11	36							48,37	021
2,20	6	58	16	11	36							48,37	022
2,30	6	58	16	11	36							48,37	023
2,33	6	58	16	11	36							48,37	823
2,40	6	58	16	11	36							48,37	024
2,43	6	58	16	11	36							48,37	824
2,50	6	58	16	11	36							48,37	025
2,55	6	58	16	11	36							48,37	825
2,60	6	58	16	11	36							48,37	026
2,62	6	58	16	11	36							48,37	826
2,70	6	58	16	11	36							48,37	027
2,80	6	58	16	11	36							48,37	028
2,90	6	58	16	11	36							48,37	029
3,00	6	62	20	14	36	42,60	03000	42,60	03000	42,60	03000	48,37	030
3,10	6	62	20	14	36	42,60	03100	42,60	03100	42,60	03100	48,37	031
3,15	6	62	20	14	36	42,60	03150	42,60	03150	42,60	03150	48,37	831
3,20	6	62	20	14	36	42,60	03200	42,60	03200	42,60	03200	48,37	032
3,22	6	62	20	14	36	42,60	03220	42,60	03220	42,60	03220	48,37	832
3,25	6	62	20	14	36	42,60	03250	42,60	03250	42,60	03250	48,37	890
3,30	6	62	20	14	36	42,60	03300	42,60	03300	42,60	03300	48,37	033
3,40	6	62	20	14	36	42,60	03400	42,60	03400	42,60	03400	48,37	034
3,50	6	62	20	14	36	42,60	03500	42,60	03500	42,60	03500	48,37	035
3,60	6	62	20	14	36	42,60	03600	42,60	03600	42,60	03600	48,37	036
3,70	6	62	20	14	36	42,60	03700	42,60	03700	42,60	03700	48,37	037
3,80	6	66	24	17	36	42,60	03800	42,60	03800	42,60	03800	48,37	038
3,85	6	66	24	17	36	42,60	03850	42,60	03850	42,60	03850	48,37	838
3,90	6	66	24	17	36	42,60	03900	42,60	03900	42,60	03900	48,37	039
4,00	6	66	24	17	36	42,60	04000	42,60	04000	42,60	04000	48,37	040
4,10	6	66	24	17	36	42,60	04100	42,60	04100	42,60	04100	48,37	041
4,20	6	66	24	17	36	42,60	04200	42,60	04200	42,60	04200	48,37	042
4,25	6	66	24	17	36	42,60	04250	42,60	04250	42,60	04250		
4,30	6	66	24	17	36	42,60	04300	42,60	04300	42,60	04300	48,37	043
4,35	6	66	24	17	36	42,60	04350	42,60	04350	42,60	04350	48,37	843
4,40	6	66	24	17	36	42,60	04400	42,60	04400	42,60	04400	48,37	044
4,45	6	66	24	17	36	42,60	04450	42,60	04450	42,60	04450	48,37	844
4,50	6	66	24	17	36	42,60	04500	42,60	04500	42,60	04500	48,37	045
4,60	6	66	24	17	36	42,60	04600	42,60	04600	42,60	04600	48,37	046
4,65	6	66	24	17	36	42,60	04650	42,60	04650	42,60	04650	48,37	900
4,70	6	66	24	17	36	42,60	04700	42,60	04700	42,60	04700	48,37	047
4,80	6	66	28	20	36	42,60	04800	42,60	04800	42,60	04800	48,37	048
P						●		●		●		○	
M												●	
K						●		●		●		○	
N												○	
S												●	
H						○		○		○			
O													

→ v_c Page 110+112

Continued on next page

WTX – High Performance Drill, DIN 6537



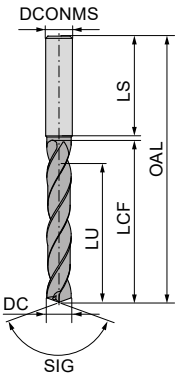

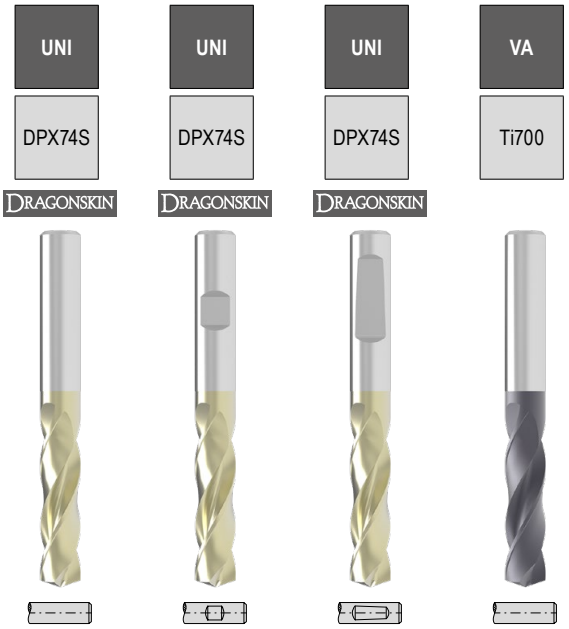

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 777 ... EUR T7		11 778 ... EUR T7		11 776 ... EUR T7		10 731 ... EUR T5	
4,90	6	66	28	20	36	42,60	04900	42,60	04900	42,60	04900	48,37	049
4,95	6	66	28	20	36	42,60	04950	42,60	04950	42,60	04950		
5,00	6	66	28	20	36	42,60	05000	42,60	05000	42,60	05000	48,37	050
5,05	6	66	28	20	36	42,60	05050	42,60	05050	42,60	05050		
5,10	6	66	28	20	36	42,60	05100	42,60	05100	42,60	05100	48,37	051
5,20	6	66	28	20	36	42,60	05200	42,60	05200	42,60	05200	48,37	052
5,30	6	66	28	20	36	42,60	05300	42,60	05300	42,60	05300	48,37	053
5,40	6	66	28	20	36	42,60	05400	42,60	05400	42,60	05400	48,37	054
5,50	6	66	28	20	36	42,60	05500	42,60	05500	42,60	05500	48,37	055
5,55	6	66	28	20	36	42,60	05550	42,60	05550	42,60	05550	48,37	902
5,60	6	66	28	20	36	42,60	05600	42,60	05600	42,60	05600	48,37	056
5,70	6	66	28	20	36	42,60	05700	42,60	05700	42,60	05700	48,37	057
5,75	6	66	28	20	36	42,60	05750	42,60	05750	42,60	05750	48,37	916
5,80	6	66	28	20	36	42,60	05800	42,60	05800	42,60	05800	48,37	058
5,90	6	66	28	20	36	42,60	05900	42,60	05900	42,60	05900	48,37	059
5,95	6	66	28	20	36	42,60	05950	42,60	05950	42,60	05950	48,37	959
6,00	6	66	28	20	36	42,60	06000	42,60	06000	42,60	06000	48,37	060
6,10	8	79	34	24	36	45,77	06100	45,77	06100	45,77	06100	55,64	061
6,20	8	79	34	24	36	45,77	06200	45,77	06200	45,77	06200	55,64	062
6,30	8	79	34	24	36	45,77	06300	45,77	06300	45,77	06300	55,64	063
6,40	8	79	34	24	36	45,77	06400	45,77	06400	45,77	06400	55,64	064
6,50	8	79	34	24	36	45,77	06500	45,77	06500	45,77	06500	55,64	065
6,60	8	79	34	24	36	45,77	06600	45,77	06600	45,77	06600	55,64	066
6,70	8	79	34	24	36	45,77	06700	45,77	06700	45,77	06700	55,64	067
6,80	8	79	34	24	36	45,77	06800	45,77	06800	45,77	06800	55,64	068
6,90	8	79	34	24	36	45,77	06900	45,77	06900	45,77	06900	55,64	069
7,00	8	79	34	24	36	45,77	07000	45,77	07000	45,77	07000	55,64	070
7,10	8	79	41	29	36	45,77	07100	45,77	07100	45,77	07100	55,64	071
7,20	8	79	41	29	36	45,77	07200	45,77	07200	45,77	07200	55,64	072
7,30	8	79	41	29	36	45,77	07300	45,77	07300	45,77	07300	55,64	073
7,40	8	79	41	29	36	45,77	07400	45,77	07400	45,77	07400	55,64	074
7,45	8	79	41	29	36	45,77	07450	45,77	07450	45,77	07450	55,64	924
7,50	8	79	41	29	36	45,77	07500	45,77	07500	45,77	07500	55,64	075
7,60	8	79	41	29	36	45,77	07600	45,77	07600	45,77	07600	55,64	076
7,70	8	79	41	29	36	45,77	07700	45,77	07700	45,77	07700	55,64	077
7,80	8	79	41	29	36	45,77	07800	45,77	07800	45,77	07800	55,64	078
7,90	8	79	41	29	36	45,77	07900	45,77	07900	45,77	07900	55,64	079
8,00	8	79	41	29	36	45,77	08000	45,77	08000	45,77	08000	55,64	080
8,10	10	89	47	35	40	50,84	08100	50,84	08100	50,84	08100	63,01	081
8,20	10	89	47	35	40	50,84	08200	50,84	08200	50,84	08200	63,01	082
8,30	10	89	47	35	40	50,84	08300	50,84	08300	50,84	08300	63,01	083

P	●	●	●	○
M				●
K	●	●	●	○
N				○
S				●
H	○	○	○	
O				

→ v_c Page 110+112

Continued on next page

WTX – High Performance Drill, DIN 6537

≤ 3xD

NOF = 2

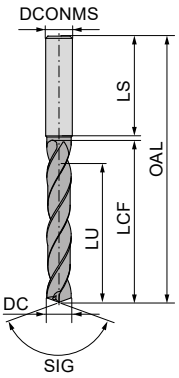

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 777 ... EUR T7		11 778 ... EUR T7		11 776 ... EUR T7		10 731 ... EUR T5	
8,40	10	89	47	35	40	50,84	08400	50,84	08400	50,84	08400	63,01	084
8,50	10	89	47	35	40	50,84	08500	50,84	08500	50,84	08500	63,01	085
8,60	10	89	47	35	40	50,84	08600	50,84	08600	50,84	08600	63,01	086
8,70	10	89	47	35	40	50,84	08700	50,84	08700	50,84	08700	63,01	087
8,80	10	89	47	35	40	50,84	08800	50,84	08800	50,84	08800	63,01	088
8,90	10	89	47	35	40	50,84	08900	50,84	08900	50,84	08900	63,01	089
9,00	10	89	47	35	40	50,84	09000	50,84	09000	50,84	09000	63,01	090
9,10	10	89	47	35	40	50,84	09100	50,84	09100	50,84	09100	63,01	091
9,20	10	89	47	35	40	50,84	09200	50,84	09200	50,84	09200	63,01	092
9,30	10	89	47	35	40	50,84	09300	50,84	09300	50,84	09300	63,01	093
9,35	10	89	47	35	40	50,84	09350	50,84	09350	50,84	09350	63,01	930
9,40	10	89	47	35	40	50,84	09400	50,84	09400	50,84	09400	63,01	094
9,45	10	89	47	35	40	50,84	09450	50,84	09450	50,84	09450	63,01	994
9,50	10	89	47	35	40	50,84	09500	50,84	09500	50,84	09500	63,01	095
9,60	10	89	47	35	40	50,84	09600	50,84	09600	50,84	09600	63,01	096
9,70	10	89	47	35	40	50,84	09700	50,84	09700	50,84	09700	63,01	097
9,80	10	89	47	35	40	50,84	09800	50,84	09800	50,84	09800	63,01	098
9,90	10	89	47	35	40	50,84	09900	50,84	09900	50,84	09900	63,01	099
10,00	10	89	47	35	40	50,84	10000	50,84	10000	50,84	10000	63,01	100
10,10	12	102	55	40	45	72,72	10100	72,72	10100	72,72	10100	87,19	101
10,20	12	102	55	40	45	72,72	10200	72,72	10200	72,72	10200	87,19	102
10,30	12	102	55	40	45	72,72	10300	72,72	10300	72,72	10300	87,19	103
10,40	12	102	55	40	45	72,72	10400	72,72	10400	72,72	10400	87,19	104
10,50	12	102	55	40	45	72,72	10500	72,72	10500	72,72	10500	87,19	105
10,55	12	102	55	40	45	72,72	10550	72,72	10550	72,72	10550	87,19	932
10,60	12	102	55	40	45	72,72	10600	72,72	10600	72,72	10600	87,19	106
10,70	12	102	55	40	45	72,72	10700	72,72	10700	72,72	10700	87,19	107
10,75	12	102	55	40	45	72,72	10750	72,72	10750	72,72	10750		
10,80	12	102	55	40	45	72,72	10800	72,72	10800	72,72	10800	87,19	108
10,90	12	102	55	40	45	72,72	10900	72,72	10900	72,72	10900	87,19	109
11,00	12	102	55	40	45	72,72	11000	72,72	11000	72,72	11000	87,19	110
11,10	12	102	55	40	45	72,72	11100	72,72	11100	72,72	11100	87,19	111
11,20	12	102	55	40	45	72,72	11200	72,72	11200	72,72	11200	87,19	112
11,25	12	102	55	40	45	72,72	11250	72,72	11250	72,72	11250	87,19	912
11,30	12	102	55	40	45	72,72	11300	72,72	11300	72,72	11300	87,19	113
11,35	12	102	55	40	45	72,72	11350	72,72	11350	72,72	11350	87,19	913
11,40	12	102	55	40	45	72,72	11400	72,72	11400	72,72	11400	87,19	114
11,45	12	102	55	40	45	72,72	11450	72,72	11450	72,72	11450	87,19	914
11,50	12	102	55	40	45	72,72	11500	72,72	11500	72,72	11500	87,19	115
11,60	12	102	55	40	45	72,72	11600	72,72	11600	72,72	11600	87,19	116
11,70	12	102	55	40	45	72,72	11700	72,72	11700	72,72	11700	87,19	117

P	●	●	●	○
M				●
K	●	●	●	○
N				○
S				●
H	○	○	○	
O				

→ v_c Page 110+112

Continued on next page

WTX – High Performance Drill, DIN 6537

≤ 3xD

NOF = 2

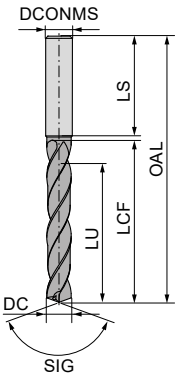

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 777 ... EUR T7		11 778 ... EUR T7		11 776 ... EUR T7		10 731 ... EUR T5	
11,80	12	102	55	40	45	72,72	11800	72,72	11800	72,72	11800	87,19	118
11,90	12	102	55	40	45	72,72	11900	72,72	11900	72,72	11900	87,19	119
12,00	12	102	55	40	45	72,72	12000	72,72	12000	72,72	12000	87,19	120
12,15	14	107	60	43	45	97,94	12150	97,94	12150	97,94	12150	111,40	921
12,25	14	107	60	43	45	97,94	12250	97,94	12250	97,94	12250		
12,50	14	107	60	43	45	97,94	12500	97,94	12500	97,94	12500	111,40	125
12,55	14	107	60	43	45	97,94	12550	97,94	12550	97,94	12550	111,40	925
12,70	14	107	60	43	45	97,94	12700	97,94	12700	97,94	12700		
12,80	14	107	60	43	45	97,94	12800	97,94	12800	97,94	12800	111,40	128
12,90	14	107	60	43	45	97,94	12900	97,94	12900	97,94	12900		
13,00	14	107	60	43	45	97,94	13000	97,94	13000	97,94	13000	111,40	130
13,10	14	107	60	43	45	97,94	13100	97,94	13100	97,94	13100		
13,30	14	107	60	43	45	97,94	13300	97,94	13300	97,94	13300		
13,35	14	107	60	43	45	97,94	13350	97,94	13350	97,94	13350	111,40	933
13,50	14	107	60	43	45	97,94	13500	97,94	13500	97,94	13500	111,40	135
13,70	14	107	60	43	45	97,94	13700	97,94	13700	97,94	13700		
13,80	14	107	60	43	45	97,94	13800	97,94	13800	97,94	13800	111,40	138
14,00	14	107	60	43	45	97,94	14000	97,94	14000	97,94	14000	111,40	140
14,20	16	115	65	45	48	123,40	14200	123,40	14200	123,40	14200		
14,50	16	115	65	45	48	123,40	14500	123,40	14500	123,40	14500	150,60	145
14,80	16	115	65	45	48	123,40	14800	123,40	14800	123,40	14800	150,60	148
15,00	16	115	65	45	48	123,40	15000	123,40	15000	123,40	15000	150,60	150
15,10	16	115	65	45	48	123,40	15100	123,40	15100	123,40	15100		
15,25	16	115	65	45	48	123,40	15250	123,40	15250	123,40	15250		
15,30	16	115	65	45	48	123,40	15300	123,40	15300	123,40	15300		
15,35	16	115	65	45	48	123,40	15350	123,40	15350	123,40	15350	150,60	953
15,50	16	115	65	45	48	123,40	15500	123,40	15500	123,40	15500	150,60	155
15,60	16	115	65	45	48	123,40	15600	123,40	15600	123,40	15600		
15,80	16	115	65	45	48	123,40	15800	123,40	15800	123,40	15800	150,60	158
16,00	16	115	65	45	48	123,40	16000	123,40	16000	123,40	16000	150,60	160
16,05	18	123	73	51	48	231,70	16050	231,70	16050	231,70	16050	302,80	960
16,50	18	123	73	51	48	231,70	16500	231,70	16500	231,70	16500	302,80	165
16,80	18	123	73	51	48	231,70	16800	231,70	16800	231,70	16800	302,80	168
16,90	18	123	73	51	48	231,70	16900	231,70	16900	231,70	16900		
17,00	18	123	73	51	48	231,70	17000	231,70	17000	231,70	17000	302,80	170
17,50	18	123	73	51	48	231,70	17500	231,70	17500	231,70	17500	302,80	175
17,60	18	123	73	51	48	231,70	17600	231,70	17600	231,70	17600		
17,80	18	123	73	51	48	231,70	17800	231,70	17800	231,70	17800	302,80	178
18,00	18	123	73	51	48	231,70	18000	231,70	18000	231,70	18000	302,80	180
18,50	20	131	79	55	50	256,50	18500	256,50	18500	256,50	18500	333,30	185
18,80	20	131	79	55	50	256,50	18800	256,50	18800	256,50	18800	333,30	188

P	●	●	●	○
M				●
K	●	●	●	○
N				○
S				●
H	○	○	○	
O				

→ v_c Page 110+112

Continued on next page

WTX – High Performance Drill, DIN 6537



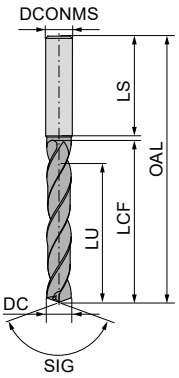

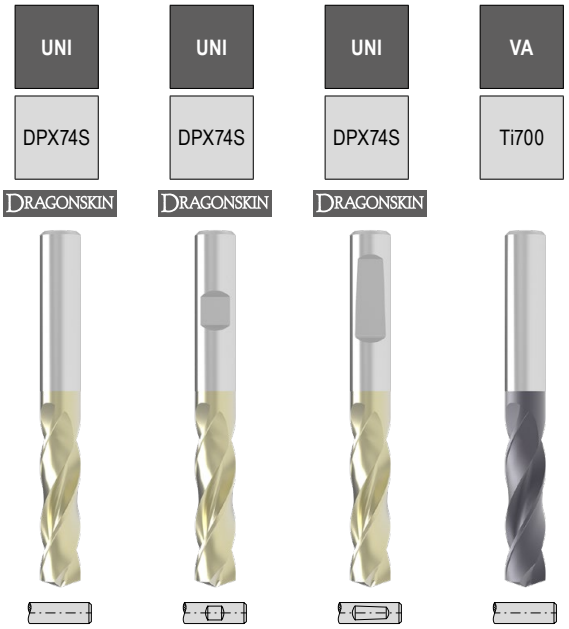

						SIG 140°		SIG 140°		SIG 140°		SIG 140°			
						Solid carbide		Solid carbide		Solid carbide		Solid carbide			
						11 777 ...		**11 778 ...**		**11 776 ...**		**10 731 ...**			
DC $_{m7}$ **mm**	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T7		EUR T7		EUR T7		EUR T5			
18,90	20	131	79	55	50	256,50	**18900**	256,50	**18900**	256,50	**18900**				
19,00	20	131	79	55	50	256,50	**19000**	256,50	**19000**	256,50	**19000**	333,30	**190**		
19,35	20	131	79	55	50	256,50	**19350**	256,50	**19350**	256,50	**19350**	333,30	**993**		
19,50	20	131	79	55	50	256,50	**19500**	256,50	**19500**	256,50	**19500**	333,30	**195**		
19,60	20	131	79	55	50	256,50	**19600**	256,50	**19600**	256,50	**19600**				
19,80	20	131	79	55	50	256,50	**19800**	256,50	**19800**	256,50	**19800**	333,30	**198**		
20,00	20	131	79	55	50	256,50	**20000**	256,50	**20000**	256,50	**20000**	333,30	**200**		
20,50	25	151	93	66	56	446,40	**20500**	446,40	**20500**	446,40	**20500**				
21,00	25	151	93	66	56	446,40	**21000**	446,40	**21000**	446,40	**21000**				
21,50	25	151	93	66	56	446,40	**21500**	446,40	**21500**	446,40	**21500**				
22,00	25	151	93	66	56	446,40	**22000**	446,40	**22000**	446,40	**22000**				
22,50	25	153	96	72	56	446,40	**22500**	446,40	**22500**	446,40	**22500**				
23,00	25	153	96	72	56	446,40	**23000**	446,40	**23000**	446,40	**23000**				
23,50	25	153	96	72	56	446,40	**23500**	446,40	**23500**	446,40	**23500**				
24,00	25	153	96	72	56	446,40	**24000**	446,40	**24000**	446,40	**24000**				
24,50	25	153	96	75	56	446,40	**24500**	446,40	**24500**	446,40	**24500**				
25,00	25	153	96	75	56	446,40	**25000**	446,40	**25000**	446,40	**25000**				
P						●		●		●		○			
M												●			
K						●		●		●		○			
N												○			
S												●			
H						○		○		○					
O															

→ v_c Page 110+112

High Performance Drill, DIN 6537

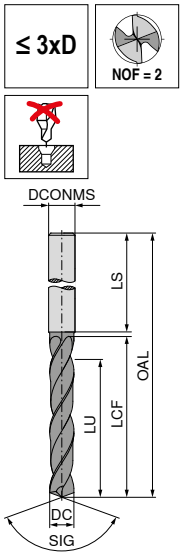

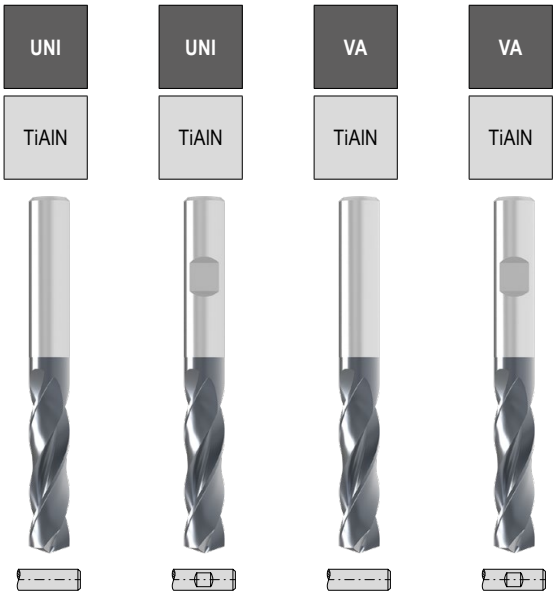

SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide

DC m7/h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 706 ... EUR T1/9C		11 707 ... EUR T1/9C		11 711 ... EUR T1/9C		11 712 ... EUR T1/9C	
1,00	4	45	7	5,5	28	33,81	01000			34,53	01000		
1,10	4	45	7	5,3	28	33,81	01100			34,53	01100		
1,20	4	45	7	5,2	28	33,81	01200			34,53	01200		
1,30	4	45	7	5,0	28	33,81	01300			34,53	01300		
1,40	4	45	7	4,9	28	33,81	01400			34,53	01400		
1,50	4	55	14	11,7	28	33,81	01500			34,53	01500		
1,60	4	55	14	11,6	28	33,81	01600			34,53	01600		
1,70	4	55	14	11,4	28	33,81	01700			34,53	01700		
1,80	4	55	14	11,3	28	33,81	01800			34,53	01800		
1,90	4	55	14	11,1	28	33,81	01900			34,53	01900		
2,00	4	55	20	17,0	28	30,83	02000			31,46	02000		
2,10	4	55	20	16,8	28	30,83	02100			31,46	02100		
2,20	4	55	20	16,7	28	30,83	02200			31,46	02200		
2,30	4	55	20	16,5	28	30,83	02300			31,46	02300		
2,40	4	55	20	16,4	28	30,83	02400			31,46	02400		
2,50	4	55	20	16,2	28	30,83	02500			31,46	02500		
2,60	4	55	20	16,1	28	30,83	02600			31,46	02600		
2,70	4	55	20	15,9	28	30,83	02700			31,46	02700		
2,80	4	55	20	15,8	28	30,83	02800			31,46	02800		
2,90	4	55	20	15,6	28	30,83	02900			31,46	02900		
3,00	6	62	20	15,5	36	29,85	03000	29,85	03000	30,49	03000	30,49	03000
3,10	6	62	20	15,3	36	29,85	03100	29,85	03100	30,49	03100	30,49	03100
3,20	6	62	20	15,2	36	29,85	03200	29,85	03200	30,49	03200	30,49	03200
3,25	6	62	20	15,1	36	29,85	03250	29,85	03250				
3,30	6	62	20	15,0	36	29,85	03300	29,85	03300	30,49	03300	30,49	03300
3,40	6	62	20	14,9	36	29,85	03400	29,85	03400	30,49	03400	30,49	03400
3,50	6	62	20	14,7	36	29,85	03500	29,85	03500	30,49	03500	30,49	03500
3,60	6	62	20	14,6	36	29,85	03600	29,85	03600	30,49	03600	30,49	03600
3,70	6	62	20	14,4	36	29,85	03700	29,85	03700	30,49	03700	30,49	03700
3,80	6	66	24	18,3	36	29,85	03800	29,85	03800	30,49	03800	30,49	03800
3,90	6	66	24	18,1	36	29,85	03900	29,85	03900	30,49	03900	30,49	03900
4,00	6	66	24	18,0	36	29,85	04000	29,85	04000	30,49	04000	30,49	04000
4,10	6	66	24	17,8	36	29,85	04100	29,85	04100	30,49	04100	30,49	04100
4,20	6	66	24	17,7	36	29,85	04200	29,85	04200	30,49	04200	30,49	04200
4,30	6	66	24	17,5	36	29,85	04300	29,85	04300	30,49	04300	30,49	04300
4,40	6	66	24	17,4	36	29,85	04400	29,85	04400	30,49	04400	30,49	04400
4,50	6	66	24	17,2	36	29,85	04500	29,85	04500	30,49	04500	30,49	04500
4,60	6	66	24	17,1	36	29,85	04600	29,85	04600	30,49	04600	30,49	04600
4,65	6	66	24	17,0	36	29,85	04650	29,85	04650				
4,70	6	66	24	16,9	36	29,85	04700	29,85	04700	30,49	04700	30,49	04700

P	●	●	○	○
M			●	●
K	●	●		
N			○	○
S			○	○
H				
O			○	○

→ v_c Page 128+132

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

Continued on next page

High Performance Drill, DIN 6537

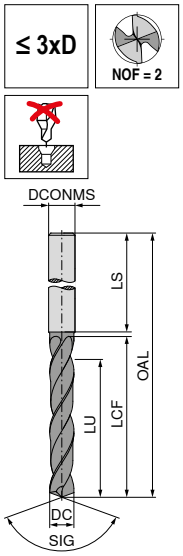

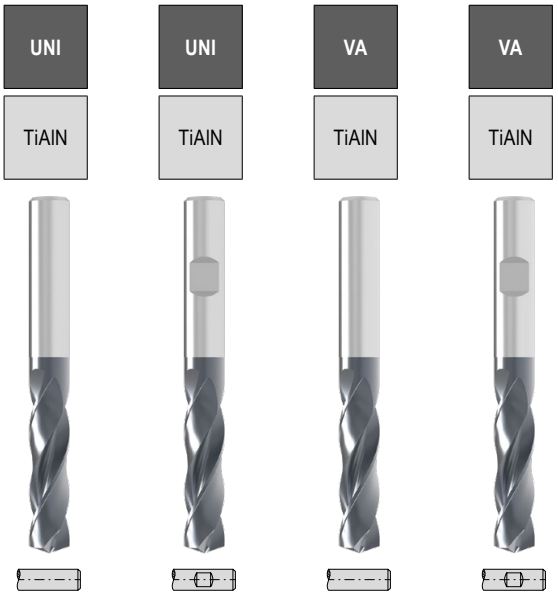

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7/h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 706 ... EUR T1/9C		11 707 ... EUR T1/9C		11 711 ... EUR T1/9C		11 712 ... EUR T1/9C	
4,80	6	66	28	20,8	36	29,85	04800	29,85	04800	30,49	04800	30,49	04800
4,90	6	66	28	20,6	36	29,85	04900	29,85	04900	30,49	04900	30,49	04900
5,00	6	66	28	20,5	36	29,85	05000	29,85	05000	30,49	05000	30,49	05000
5,10	6	66	28	20,3	36	29,85	05100	29,85	05100	30,49	05100	30,49	05100
5,20	6	66	28	20,2	36	29,85	05200	29,85	05200	30,49	05200	30,49	05200
5,30	6	66	28	20,0	36	29,85	05300	29,85	05300	30,49	05300	30,49	05300
5,40	6	66	28	19,9	36	29,85	05400	29,85	05400	30,49	05400	30,49	05400
5,50	6	66	28	19,7	36	29,85	05500	29,85	05500	30,49	05500	30,49	05500
5,55	6	66	28	19,6	36	29,85	05550	29,85	05550				
5,60	6	66	28	19,6	36	29,85	05600	29,85	05600	30,49	05600	30,49	05600
5,65	6	66	28	19,5	36	29,85	05650	29,85	05650				
5,70	6	66	28	19,4	36	29,85	05700	29,85	05700	30,49	05700	30,49	05700
5,80	6	66	28	19,3	36	29,85	05800	29,85	05800	30,49	05800	30,49	05800
5,90	6	66	28	19,1	36	29,85	05900	29,85	05900	30,49	05900	30,49	05900
6,00	6	66	28	19,0	36	29,85	06000	29,85	06000	30,49	06000	30,49	06000
6,10	8	79	34	24,8	36	29,97	06100	29,97	06100	30,59	06100	30,59	06100
6,20	8	79	34	24,7	36	29,97	06200	29,97	06200	30,59	06200	30,59	06200
6,30	8	79	34	24,5	36	29,97	06300	29,97	06300	30,59	06300	30,59	06300
6,40	8	79	34	24,4	36	29,97	06400	29,97	06400	30,59	06400	30,59	06400
6,50	8	79	34	24,2	36	29,97	06500	29,97	06500	30,59	06500	30,59	06500
6,60	8	79	34	24,1	36	29,97	06600	29,97	06600	30,59	06600	30,59	06600
6,70	8	79	34	23,9	36	29,97	06700	29,97	06700	30,59	06700	30,59	06700
6,80	8	79	34	23,8	36	29,97	06800	29,97	06800	30,59	06800	30,59	06800
6,90	8	79	34	23,6	36	29,97	06900	29,97	06900	30,59	06900	30,59	06900
7,00	8	79	34	23,5	36	29,97	07000	29,97	07000	30,59	07000	30,59	07000
7,10	8	79	41	30,3	36	29,97	07100	29,97	07100	30,59	07100	30,59	07100
7,20	8	79	41	30,2	36	29,97	07200	29,97	07200	30,59	07200	30,59	07200
7,30	8	79	41	30,0	36	29,97	07300	29,97	07300	30,59	07300	30,59	07300
7,40	8	79	41	29,9	36	29,97	07400	29,97	07400	30,59	07400	30,59	07400
7,50	8	79	41	29,7	36	29,97	07500	29,97	07500	30,59	07500	30,59	07500
7,55	8	79	41	29,6	36	29,97	07550	29,97	07550				
7,60	8	79	41	29,6	36	29,97	07600	29,97	07600	30,59	07600	30,59	07600
7,65	8	79	41	29,5	36	29,97	07650	29,97	07650				
7,70	8	79	41	29,4	36	29,97	07700	29,97	07700	30,59	07700	30,59	07700
7,80	8	79	41	29,3	36	29,97	07800	29,97	07800	30,59	07800	30,59	07800
7,90	8	79	41	29,1	36	29,97	07900	29,97	07900	30,59	07900	30,59	07900
8,00	8	79	41	29,0	36	29,97	08000	29,97	08000	30,59	08000	30,59	08000
8,10	10	89	47	34,8	40	33,55	08100	33,55	08100	34,24	08100	34,24	08100
8,20	10	89	47	34,7	40	33,55	08200	33,55	08200	34,24	08200	34,24	08200
8,30	10	89	47	34,5	40	33,55	08300	33,55	08300	34,24	08300	34,24	08300

P	●	●	○	○
M			●	●
K	●	●		
N			○	○
S			○	○
H				
O			○	○

→ v_c Page 128+132

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

Continued on next page

High Performance Drill, DIN 6537

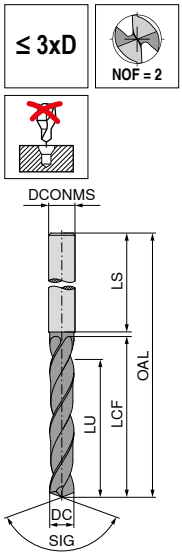

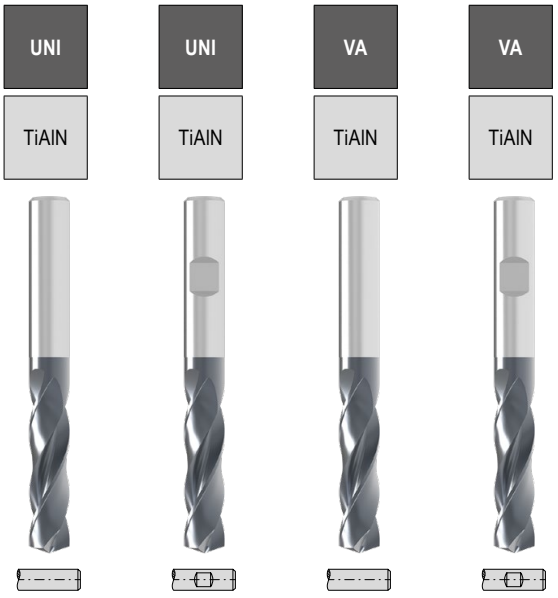

SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide

DC m7/h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 706 ... EUR T1/9C		11 707 ... EUR T1/9C		11 711 ... EUR T1/9C		11 712 ... EUR T1/9C	
8,40	10	89	47	34,4	40	33,55	08400	33,55	08400	34,24	08400	34,24	08400
8,50	10	89	47	34,2	40	33,55	08500	33,55	08500	34,24	08500	34,24	08500
8,60	10	89	47	34,1	40	33,55	08600	33,55	08600	34,24	08600	34,24	08600
8,70	10	89	47	33,9	40	33,55	08700	33,55	08700	34,24	08700	34,24	08700
8,80	10	89	47	33,8	40	33,55	08800	33,55	08800	34,24	08800	34,24	08800
8,90	10	89	47	33,6	40	33,55	08900	33,55	08900	34,24	08900	34,24	08900
9,00	10	89	47	33,5	40	33,55	09000	33,55	09000	34,24	09000	34,24	09000
9,10	10	89	47	33,3	40	33,55	09100	33,55	09100	34,24	09100	34,24	09100
9,20	10	89	47	33,2	40	33,55	09200	33,55	09200	34,24	09200	34,24	09200
9,30	10	89	47	33,0	40	33,55	09300	33,55	09300	34,24	09300	34,24	09300
9,40	10	89	47	32,9	40	33,55	09400	33,55	09400	34,24	09400	34,24	09400
9,50	10	89	47	32,7	40	33,55	09500	33,55	09500	34,24	09500	34,24	09500
9,60	10	89	47	32,6	40	33,55	09600	33,55	09600	34,24	09600	34,24	09600
9,70	10	89	47	32,4	40	33,55	09700	33,55	09700	34,24	09700	34,24	09700
9,80	10	89	47	32,3	40	33,55	09800	33,55	09800	34,24	09800	34,24	09800
9,90	10	89	47	32,1	40	33,55	09900	33,55	09900	34,24	09900	34,24	09900
10,00	10	89	47	32,0	40	33,55	10000	33,55	10000	34,24	10000	34,24	10000
10,10	12	102	55	39,8	45	50,58	10100	50,58	10100	51,65	10100	51,65	10100
10,20	12	102	55	39,7	45	50,58	10200	50,58	10200	51,65	10200	51,65	10200
10,30	12	102	55	39,5	45	50,58	10300	50,58	10300	51,65	10300	51,65	10300
10,40	12	102	55	39,4	45	50,58	10400	50,58	10400	51,65	10400	51,65	10400
10,50	12	102	55	39,2	45	50,58	10500	50,58	10500	51,65	10500	51,65	10500
10,60	12	102	55	39,1	45	50,58	10600	50,58	10600	51,65	10600	51,65	10600
10,70	12	102	55	38,9	45	50,58	10700	50,58	10700	51,65	10700	51,65	10700
10,80	12	102	55	38,8	45	50,58	10800	50,58	10800	51,65	10800	51,65	10800
10,90	12	102	55	38,6	45	50,58	10900	50,58	10900	51,65	10900	51,65	10900
11,00	12	102	55	38,5	45	50,58	11000	50,58	11000	51,65	11000	51,65	11000
11,10	12	102	55	38,3	45	50,58	11100	50,58	11100	51,65	11100	51,65	11100
11,20	12	102	55	38,2	45	50,58	11200	50,58	11200	51,65	11200	51,65	11200
11,30	12	102	55	38,0	45	50,58	11300	50,58	11300	51,65	11300	51,65	11300
11,40	12	102	55	37,9	45	50,58	11400	50,58	11400	51,65	11400	51,65	11400
11,50	12	102	55	37,7	45	50,58	11500	50,58	11500	51,65	11500	51,65	11500
11,60	12	102	55	37,6	45	50,58	11600	50,58	11600	51,65	11600	51,65	11600
11,70	12	102	55	37,4	45	50,58	11700	50,58	11700	51,65	11700	51,65	11700
11,80	12	102	55	37,3	45	50,58	11800	50,58	11800	51,65	11800	51,65	11800
11,90	12	102	55	37,1	45	50,58	11900	50,58	11900	51,65	11900	51,65	11900
12,00	12	102	55	37,0	45	50,58	12000	50,58	12000	51,65	12000	51,65	12000
12,20	14	107	60	41,7	45	67,77	12200	67,77	12200	69,20	12200	69,20	12200
12,50	14	107	60	41,2	45	67,77	12500	67,77	12500	69,20	12500	69,20	12500
12,70	14	107	60	40,9	45	67,77	12700	67,77	12700	69,20	12700	69,20	12700

P	●	●	○	○
M			●	●
K	●	●		
N			○	○
S			○	○
H				
O			○	○

→ v_c Page 128+132

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

Continued on next page

High Performance Drill, DIN 6537

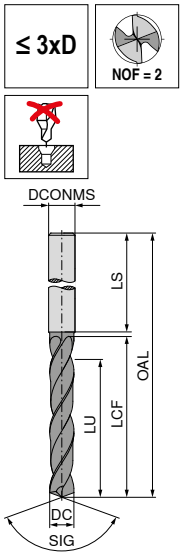

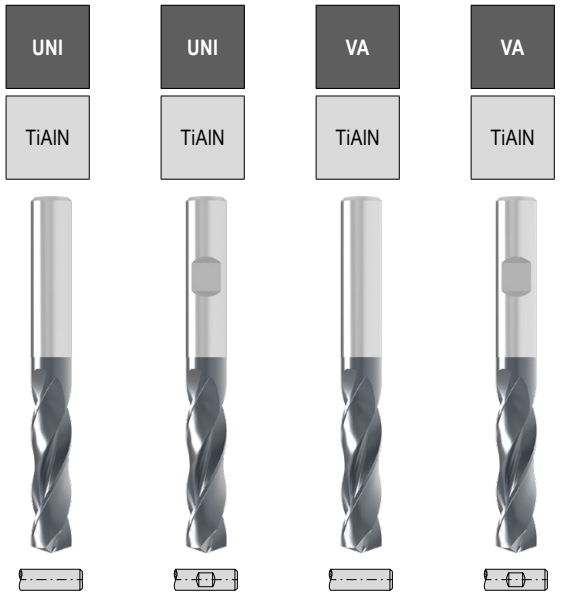

						SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
						11 706 ...		**11 707 ...**		**11 711 ...**		**11 712 ...**	
DC $_{m7/h7}$ **mm**	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T1/9C		EUR T1/9C		EUR T1/9C		EUR T1/9C	
12,80	14	107	60	40,8	45	67,77	**12800**	67,77	**12800**	69,20	**12800**	69,20	**12800**
13,00	14	107	60	40,5	45	67,77	**13000**	67,77	**13000**	69,20	**13000**	69,20	**13000**
13,10	14	107	60	40,3	45	67,77	**13100**	67,77	**13100**	69,20	**13100**	69,20	**13100**
13,50	14	107	60	39,7	45	67,77	**13500**	67,77	**13500**	69,20	**13500**	69,20	**13500**
13,70	14	107	60	39,4	45					69,20	**13700**	69,20	**13700**
13,80	14	107	60	39,3	45	67,77	**13800**	67,77	**13800**	69,20	**13800**	69,20	**13800**
14,00	14	107	60	39,0	45	67,77	**14000**	67,77	**14000**	69,20	**14000**	69,20	**14000**
14,20	16	115	65	43,7	48	88,12	**14200**	88,12	**14200**	89,93	**14200**	89,93	**14200**
14,40	16	115	65	43,4	48	88,12	**14400**	88,12	**14400**	89,93	**14400**	89,93	**14400**
14,50	16	115	65	43,2	48	88,12	**14500**	88,12	**14500**	89,93	**14500**	89,93	**14500**
14,70	16	115	65	42,9	48					89,93	**14700**	89,93	**14700**
14,80	16	115	65	42,8	48	88,12	**14800**	88,12	**14800**	89,93	**14800**	89,93	**14800**
15,00	16	115	65	42,5	48	88,12	**15000**	88,12	**15000**	89,93	**15000**	89,93	**15000**
15,10	16	115	65	42,3	48	88,12	**15100**	88,12	**15100**	89,93	**15100**	89,93	**15100**
15,20	16	115	65	42,2	48	88,12	**15200**	88,12	**15200**	89,93	**15200**	89,93	**15200**
15,50	16	115	65	41,7	48	88,12	**15500**	88,12	**15500**	89,93	**15500**	89,93	**15500**
15,70	16	115	65	41,4	48					89,93	**15700**	89,93	**15700**
15,80	16	115	65	41,3	48	88,12	**15800**	88,12	**15800**	89,93	**15800**	89,93	**15800**
16,00	16	115	65	41,0	48	88,12	**16000**	88,12	**16000**	89,93	**16000**	89,93	**16000**
16,50	18	123	73	48,2	48	149,30	**16500**	149,30	**16500**	152,50	**16500**	152,50	**16500**
17,00	18	123	73	47,5	48	149,30	**17000**	149,30	**17000**	152,50	**17000**	152,50	**17000**
17,50	18	123	73	46,7	48	149,30	**17500**	149,30	**17500**	152,50	**17500**	152,50	**17500**
18,00	18	123	73	46,0	48	149,30	**18000**	149,30	**18000**	152,50	**18000**	152,50	**18000**
18,50	20	131	79	51,2	50	163,40	**18500**	163,40	**18500**	166,80	**18500**	166,80	**18500**
18,90	20	131	79	50,6	50	163,40	**18900**	163,40	**18900**	166,80	**18900**	166,80	**18900**
19,00	20	131	79	50,5	50	163,40	**19000**	163,40	**19000**	166,80	**19000**	166,80	**19000**
19,50	20	131	79	49,7	50	163,40	**19500**	163,40	**19500**	166,80	**19500**	166,80	**19500**
20,00	20	131	79	49,0	50	163,40	**20000**	163,40	**20000**	166,80	**20000**	166,80	**20000**
P						●		●		○		○	
M										●		●	
K						●		●					
N										○		○	
S										○		○	
H													
O										○		○	

→ v_c Page 128+132

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

WTX – High Performance Drill, factory standard

- ▲ Special cutting edge geometry
- ▲ Special flute geometry
- ▲ Optimised core thickness
- ▲ 46 to 70 HRC





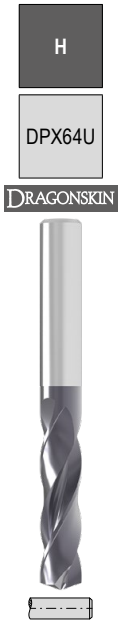

SIG 140°

Solid carbide

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 777 ... EUR T4/9F	
2,55	4	55	20	16,1	28	71,96	02550
2,60	4	55	20	16,1	28	71,96	02600
2,70	4	55	20	15,9	28	71,96	02700
2,80	4	55	20	15,8	28	71,96	02800
2,90	4	55	20	15,6	28	71,96	02900
3,00	6	62	20	15,5	36	103,80	03000
3,10	6	62	20	15,3	36	103,80	03100
3,20	6	62	20	15,2	36	103,80	03200
3,30	6	62	20	15,0	36	103,80	03300
3,40	6	62	20	14,9	36	103,80	03400
3,50	6	62	20	14,7	36	103,80	03500
3,60	6	62	20	14,6	36	103,80	03600
3,70	6	62	20	14,4	36	103,80	03700
3,80	6	66	24	18,3	36	103,80	03800
3,90	6	66	24	18,1	36	103,80	03900
4,00	6	66	24	18,0	36	103,80	04000
4,10	6	66	24	17,8	36	103,80	04100
4,20	6	66	24	17,7	36	103,80	04200
4,30	6	66	24	17,5	36	103,80	04300
4,40	6	66	24	17,4	36	103,80	04400
4,50	6	66	24	17,2	36	103,80	04500
4,60	6	66	24	17,1	36	103,80	04600
4,70	6	66	24	16,9	36	103,80	04700
4,80	6	66	28	20,8	36	103,80	04800
4,90	6	66	28	20,6	36	103,80	04900
5,00	6	66	28	20,5	36	103,80	05000
5,10	6	66	28	20,3	36	103,80	05100
5,20	6	66	28	20,2	36	103,80	05200
5,30	6	66	28	20,0	36	103,80	05300
5,40	6	66	28	19,9	36	103,80	05400
5,50	6	66	28	19,7	36	103,80	05500
5,60	6	66	28	19,6	36	103,80	05600
5,70	6	66	28	19,4	36	103,80	05700
5,80	6	66	28	19,3	36	103,80	05800
5,90	6	66	28	19,1	36	103,80	05900
6,00	6	66	28	19,0	36	103,80	06000
6,10	8	79	34	24,8	36	134,80	06100
6,20	8	79	34	24,7	36	134,80	06200
6,30	8	79	34	24,5	36	134,80	06300
6,40	8	79	34	24,4	36	134,80	06400
6,50	8	79	34	24,2	36	134,80	06500
6,60	8	79	34	24,1	36	134,80	06600
6,70	8	79	34	23,9	36	134,80	06700
6,80	8	79	34	23,8	36	134,80	06800
6,90	8	79	34	23,6	36	134,80	06900
7,00	8	79	34	23,5	36	134,80	07000
7,10	8	79	41	30,3	36	134,80	07100
7,20	8	79	41	30,2	36	134,80	07200
7,30	8	79	41	30,0	36	134,80	07300
7,40	8	79	41	29,9	36	134,80	07400
7,50	8	79	41	29,7	36	134,80	07500
7,60	8	79	41	29,6	36	134,80	07600
7,70	8	79	41	29,4	36	134,80	07700
7,80	8	79	41	29,3	36	134,80	07800
7,90	8	79	41	29,1	36	134,80	07900
8,00	8	79	41	29,0	36	134,80	08000
8,10	10	89	47	34,8	40	152,50	08100
8,20	10	89	47	34,7	40	152,50	08200
8,30	10	89	47	34,5	40	152,50	08300
8,40	10	89	47	34,4	40	152,50	08400
8,50	10	89	47	34,2	40	152,50	08500
8,60	10	89	47	34,1	40	152,50	08600
8,70	10	89	47	33,9	40	152,50	08700
8,80	10	89	47	33,8	40	152,50	08800
8,90	10	89	47	33,6	40	152,50	08900
9,00	10	89	47	33,5	40	152,50	09000
9,10	10	89	47	33,3	40	152,50	09100
9,20	10	89	47	33,2	40	152,50	09200
9,30	10	89	47	33,0	40	152,50	09300
9,40	10	89	47	32,9	40	152,50	09400
9,50	10	89	47	32,7	40	152,50	09500
9,60	10	89	47	32,6	40	152,50	09600
9,70	10	89	47	32,4	40	152,50	09700
9,80	10	89	47	32,3	40	152,50	09800
9,90	10	89	47	32,1	40	152,50	09900
10,00	10	89	47	32,0	40	152,50	10000
10,10	12	102	55	39,8	45	197,90	10100
10,20	12	102	55	39,7	45	197,90	10200
10,30	12	102	55	39,5	45	197,90	10300
10,40	12	102	55	39,4	45	197,90	10400
10,50	12	102	55	39,2	45	197,90	10500
10,60	12	102	55	39,1	45	197,90	10600
10,70	12	102	55	38,9	45	197,90	10700
10,80	12	102	55	38,8	45	197,90	10800
10,90	12	102	55	38,6	45	197,90	10900
11,00	12	102	55	38,5	45	197,90	11000
11,10	12	102	55	38,3	45	197,90	11100
11,20	12	102	55	38,2	45	197,90	11200
11,30	12	102	55	38,0	45	197,90	11300
11,40	12	102	55	37,9	45	197,90	11400
11,50	12	102	55	37,7	45	197,90	11500
11,60	12	102	55	37,6	45	197,90	11600
11,70	12	102	55	37,4	45	197,90	11700
11,80	12	102	55	37,3	45	197,90	11800
11,90	12	102	55	37,1	45	197,90	11900
12,00	12	102	55	37,0	45	197,90	12000
12,10	14	107	60	41,8	45	233,80	12100
12,20	14	107	60	41,7	45	233,80	12200
12,30	14	107	60	41,5	45	233,80	12300
12,40	14	107	60	41,4	45	233,80	12400
12,50	14	107	60	41,2	45	233,80	12500
12,60	14	107	60	41,1	45	233,80	12600
12,70	14	107	60	40,9	45	233,80	12700
12,80	14	107	60	40,8	45	233,80	12800
12,90	14	107	60	40,6	45	233,80	12900
13,00	14	107	60	40,5	45	233,80	13000
13,10	14	107	60	40,3	45	233,80	13100
13,20	14	107	60	40,2	45	233,80	13200
13,30	14	107	60	40,0	45	233,80	13300
13,40	14	107	60	39,9	45	233,80	13400
13,50	14	107	60	39,7	45	233,80	13500
13,60	14	107	60	39,6	45	233,80	13600
13,70	14	107	60	39,4	45	233,80	13700
13,80	14	107	60	39,3	45	233,80	13800
13,90	14	107	60	39,1	45	233,80	13900
14,00	14	107	60	39,0	45	233,80	14000

P	○
K	●
S	
H.1.1	●
H.1.2	●
H.1.3	●
H.1.4	●

→ v_c Page 119

Twist drill similar to DIN 1897

▲ Helix angle 30°
▲ Shank Ø h7

≤ 3xD

NOF = 2

N



SIG 118°
Solid carbide

DC h7 mm	OAL mm	LCF mm	10 700 ... EUR T3	
0,5	20	3,0	7,81	005
0,6	21	3,5	8,06	006
0,7	23	4,5	8,06	007
0,8	24	5,0	8,06	008
0,9	25	5,5	8,06	009
1,0	26	6,0	8,06	010
1,2	30	8,0	8,06	012
1,3	30	8,0	8,06	013
1,4	32	9,0	8,06	014
1,5	32	9,0	8,06	015
1,6	34	10,0	8,06	016
1,7	34	10,0	8,06	017
1,8	36	11,0	8,06	018
1,9	36	11,0	8,06	019
2,0	38	12,0	8,06	020
2,1	38	12,0	8,54	021
2,2	40	13,0	8,54	022
2,3	40	13,0	8,54	023
2,4	43	14,0	8,54	024
2,5	43	14,0	8,54	025
2,6	43	14,0	8,54	026
2,7	46	16,0	11,28	027
2,8	46	16,0	11,28	028
2,9	46	16,0	11,28	029
3,0	46	16,0	11,28	030
3,1	49	18,0	11,46	031
3,2	49	18,0	11,46	032
3,3	49	18,0	11,46	033
3,4	52	20,0	12,25	034
3,5	52	20,0	12,25	035
3,6	52	20,0	13,55	036
3,7	52	20,0	13,55	037
3,8	55	22,0	14,77	038
3,9	55	22,0	14,77	039
4,0	55	22,0	14,77	040
4,1	55	22,0	15,50	041
4,2	55	22,0	15,50	042
4,3	58	24,0	16,36	043
4,4	58	24,0	16,36	044
4,5	58	24,0	16,36	045
4,6	58	24,0	16,36	046
4,7	58	24,0	17,52	047
4,8	62	26,0	17,52	048
4,9	62	26,0	17,52	049
5,0	62	26,0	17,52	050
5,1	62	26,0	17,52	051
5,2	62	26,0	22,75	052
5,3	62	26,0	22,75	053
5,4	66	28,0	22,75	054
5,5	66	28,0	22,75	055
5,6	66	28,0	24,20	056
5,7	66	28,0	24,20	057
5,8	66	28,0	24,20	058
5,9	66	28,0	24,20	059
6,0	66	28,0	24,20	060
6,1	70	31,0	30,14	061
6,2	70	31,0	30,14	062
6,3	70	31,0	30,14	063
6,4	70	31,0	30,14	064
6,5	70	31,0	29,41	065
6,6	70	31,0	35,50	066
6,7	70	31,0	35,50	067
6,8	74	34,0	35,50	068
6,9	74	34,0	35,50	069
7,0	74	34,0	35,06	070
7,1	74	34,0	42,15	071
7,2	74	34,0	42,15	072
7,3	74	34,0	42,15	073
7,4	74	34,0	42,15	074
7,5	74	34,0	42,15	075
7,6	79	37,0	47,83	076
7,7	79	37,0	47,83	077
7,8	79	37,0	47,83	078
7,9	79	37,0	47,83	079
8,0	79	37,0	46,80	080
8,1	79	37,0	58,80	081
8,2	79	37,0	58,80	082
8,3	79	37,0	58,80	083
8,4	79	37,0	58,80	084
8,5	79	37,0	58,80	085
8,6	84	40,0	62,72	086
8,7	84	40,0	62,72	087
8,8	84	40,0	62,72	088
8,9	84	40,0	62,72	089
9,0	84	40,0	59,54	090
9,1	84	40,0	65,90	091
9,2	84	40,0	65,90	092
9,3	84	40,0	65,90	093
9,4	84	40,0	65,90	094
9,5	84	40,0	65,90	095
9,6	89	43,0	71,27	096
9,7	89	43,0	71,27	097
9,8	89	43,0	71,27	098
9,9	89	43,0	67,80	099
10,0	89	43,0	67,80	100
10,2	89	43,0	80,84	102
10,5	89	43,0	80,84	105
10,8	95	47,0	80,84	108
11,0	95	47,0	89,52	110
11,2	95	47,0	104,40	112
11,5	95	47,0	104,40	115
11,8	95	47,0	104,40	118
12,0	102	51,0	104,40	120
12,5	102	51,0	126,80	125
13,0	102	51,0	126,80	130
13,5	107	54,0	168,00	135
14,0	107	54,0	168,00	140
14,5	111	56,0	185,40	145
15,0	111	56,0	185,40	150
15,5	115	58,0	207,20	155
16,0	115	58,0	207,20	160
18,0	123	62,0	311,60	180
20,0	131	66,0	418,70	200

P	○
M	
K	●
N	●
S	○
H	
O	

→ v_c Page 134

WTX – High Performance Drill, DIN 6537



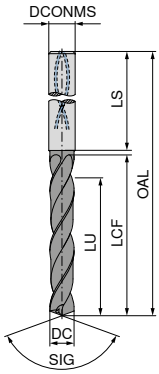

Speed UNI	UNI	UNI	UNI	VA
DPX14S	DPX74S	DPX74S	DPX74S	Ti700
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	

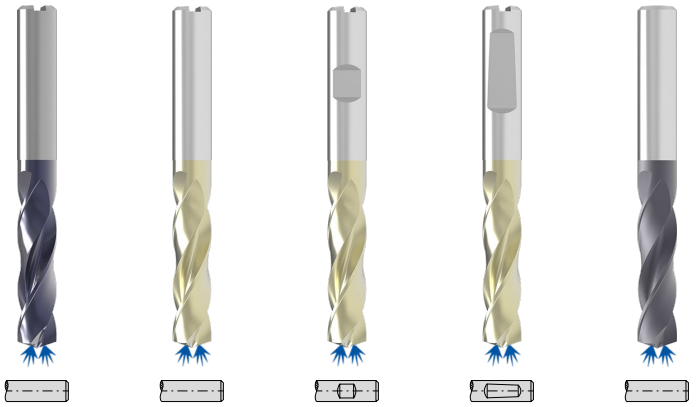

SIG 145°	SIG 140°	SIG 140°	SIG 140°	SIG 140°
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
10 781 ...	**11 780 ...**	**11 781 ...**	**11 779 ...**	**10 734 ...**

DC $_{m7/h7}$	DCONMS $_{h6}$	OAL	LCF	LU	LS	10 781 ...		11 780 ...		11 781 ...		11 779 ...		10 734 ...	
mm	mm	mm	mm	mm	mm	EUR T4		EUR T7		EUR T7		EUR T7		EUR T5	
3,00	6	62	20	14	36	78,80	03000	60,12	03000	60,12	03000	60,12	03000	72,57	030
3,10	6	62	20	14	36	78,80	03100	60,12	03100	60,12	03100	60,12	03100	72,57	031
3,15	6	62	20	14	36			60,12	03150	60,12	03150	60,12	03150	72,57	831
3,20	6	62	20	14	36	78,80	03200	60,12	03200	60,12	03200	60,12	03200	72,57	032
3,22	6	62	20	14	36			60,12	03220	60,12	03220	60,12	03220	72,57	832
3,25	6	62	20	14	36			60,12	03250	60,12	03250	60,12	03250	72,57	890
3,30	6	62	20	14	36	78,80	03300	60,12	03300	60,12	03300	60,12	03300	72,57	033
3,40	6	62	20	14	36	78,80	03400	60,12	03400	60,12	03400	60,12	03400	72,57	034
3,50	6	62	20	14	36	78,80	03500	60,12	03500	60,12	03500	60,12	03500	72,57	035
3,60	6	62	20	14	36	78,80	03600	60,12	03600	60,12	03600	60,12	03600	72,57	036
3,70	6	62	20	14	36	78,80	03700	60,12	03700	60,12	03700	60,12	03700	72,57	037
3,80	6	66	24	17	36	78,80	03800	60,12	03800	60,12	03800	60,12	03800	72,57	038
3,85	6	66	24	17	36			60,12	03850	60,12	03850	60,12	03850	72,57	838
3,90	6	66	24	17	36	78,80	03900	60,12	03900	60,12	03900	60,12	03900	72,57	039
4,00	6	66	24	17	36	78,80	04000	60,12	04000	60,12	04000	60,12	04000	72,57	040
4,10	6	66	24	17	36	78,80	04100	60,12	04100	60,12	04100	60,12	04100	72,57	041
4,20	6	66	24	17	36	78,80	04200	60,12	04200	60,12	04200	60,12	04200	72,57	042
4,25	6	66	24	17	36			60,12	04250	60,12	04250	60,12	04250		
4,30	6	66	24	17	36	78,80	04300	60,12	04300	60,12	04300	60,12	04300	72,57	043
4,35	6	66	24	17	36			60,12	04350	60,12	04350	60,12	04350	72,57	843
4,40	6	66	24	17	36	78,80	04400	60,12	04400	60,12	04400	60,12	04400	72,57	044
4,45	6	66	24	17	36			60,12	04450	60,12	04450	60,12	04450	72,57	844
4,50	6	66	24	17	36	78,80	04500	60,12	04500	60,12	04500	60,12	04500	72,57	045
4,60	6	66	24	17	36	78,80	04600	60,12	04600	60,12	04600	60,12	04600	72,57	046
4,65	6	66	24	17	36	78,80	04650	60,12	04650	60,12	04650	60,12	04650	72,57	900
4,70	6	66	24	17	36	78,80	04700	60,12	04700	60,12	04700	60,12	04700	72,57	047
4,80	6	66	28	20	36	78,80	04800	60,12	04800	60,12	04800	60,12	04800	72,57	048
4,90	6	66	28	20	36	78,80	04900	60,12	04900	60,12	04900	60,12	04900	72,57	049
4,95	6	66	28	20	36			60,12	04950	60,12	04950	60,12	04950		
5,00	6	66	28	20	36	78,80	05000	60,12	05000	60,12	05000	60,12	05000	72,57	050
5,05	6	66	28	20	36			60,12	05050	60,12	05050	60,12	05050		
5,10	6	66	28	20	36	78,80	05100	60,12	05100	60,12	05100	60,12	05100	72,57	051
5,20	6	66	28	20	36	78,80	05200	60,12	05200	60,12	05200	60,12	05200	72,57	052
5,30	6	66	28	20	36	78,80	05300	60,12	05300	60,12	05300	60,12	05300	72,57	053
5,40	6	66	28	20	36	78,80	05400	60,12	05400	60,12	05400	60,12	05400	72,57	054
5,50	6	66	28	20	36	78,80	05500	60,12	05500	60,12	05500	60,12	05500	72,57	055
5,55	6	66	28	20	36	78,80	05550	60,12	05550	60,12	05550	60,12	05550	72,57	902
5,60	6	66	28	20	36	78,80	05600	60,12	05600	60,12	05600	60,12	05600	72,57	056
5,70	6	66	28	20	36	78,80	05700	60,12	05700	60,12	05700	60,12	05700	72,57	057
5,75	6	66	28	20	36			60,12	05750	60,12	05750	60,12	05750	72,57	916
5,80	6	66	28	20	36	78,80	05800	60,12	05800	60,12	05800	60,12	05800	72,57	058
5,90	6	66	28	20	36	78,80	05900	60,12	05900	60,12	05900	60,12	05900	72,57	059

P	●	●	●	●	○
M	●				●
K	●	●	●	●	○
N					○
S					●
H		○	○	○	
O					

→ v_c Page 110–114

Ø DC_{m7} for Type UNI and VA / Ø DC_{h7} for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



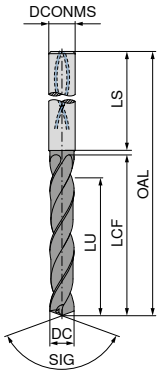

Speed UNI	UNI	UNI	UNI	VA
DPX14S	DPX74S	DPX74S	DPX74S	Ti700
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	

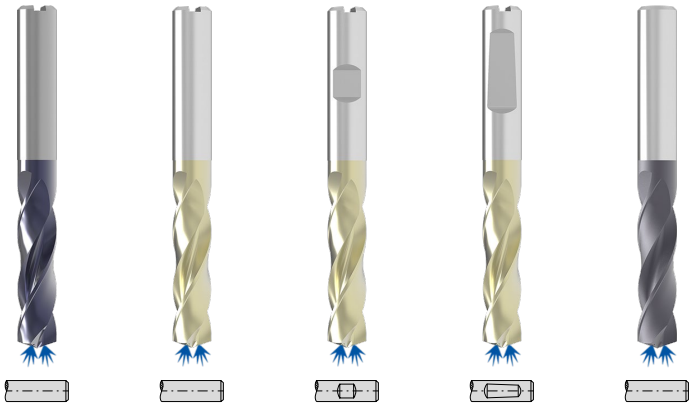

SIG 145° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
10 781 ...	**11 780 ...**	**11 781 ...**	**11 779 ...**	**10 734 ...**

DC $_{m7/h7}$	DCONMS $_{h6}$	OAL	LCF	LU	LS	EUR T4		EUR T7		EUR T7		EUR T7		EUR T5	
mm	mm	mm	mm	mm	mm										
5,95	6	66	28	20	36			60,12	05950	60,12	05950	60,12	05950	72,57	959
6,00	6	66	28	20	36	78,80	06000	60,12	06000	60,12	06000	60,12	06000	72,57	060
6,10	8	79	34	24	36	103,30	06100	78,80	06100	78,80	06100	78,80	06100	92,27	061
6,20	8	79	34	24	36	103,30	06200	78,80	06200	78,80	06200	78,80	06200	92,27	062
6,30	8	79	34	24	36	103,30	06300	78,80	06300	78,80	06300	78,80	06300	92,27	063
6,40	8	79	34	24	36	103,30	06400	78,80	06400	78,80	06400	78,80	06400	92,27	064
6,50	8	79	34	24	36	103,30	06500	78,80	06500	78,80	06500	78,80	06500	92,27	065
6,60	8	79	34	24	36	103,30	06600	78,80	06600	78,80	06600	78,80	06600	92,27	066
6,70	8	79	34	24	36	103,30	06700	78,80	06700	78,80	06700	78,80	06700	92,27	067
6,80	8	79	34	24	36	103,30	06800	78,80	06800	78,80	06800	78,80	06800	92,27	068
6,90	8	79	34	24	36	103,30	06900	78,80	06900	78,80	06900	78,80	06900	92,27	069
7,00	8	79	34	24	36	103,30	07000	78,80	07000	78,80	07000	78,80	07000	92,27	070
7,10	8	79	41	29	36	103,30	07100	78,80	07100	78,80	07100	78,80	07100	92,27	071
7,20	8	79	41	29	36	103,30	07200	78,80	07200	78,80	07200	78,80	07200	92,27	072
7,30	8	79	41	29	36	103,30	07300	78,80	07300	78,80	07300	78,80	07300	92,27	073
7,40	8	79	41	29	36	103,30	07400	78,80	07400	78,80	07400	78,80	07400	92,27	074
7,45	8	79	41	29	36			78,80	07450	78,80	07450	78,80	07450	92,27	924
7,50	8	79	41	29	36	103,30	07500	78,80	07500	78,80	07500	78,80	07500	92,27	075
7,60	8	79	41	29	36	103,30	07600	78,80	07600	78,80	07600	78,80	07600	92,27	076
7,70	8	79	41	29	36	103,30	07700	78,80	07700	78,80	07700	78,80	07700	92,27	077
7,80	8	79	41	29	36	103,30	07800	78,80	07800	78,80	07800	78,80	07800	92,27	078
7,90	8	79	41	29	36	103,30	07900	78,80	07900	78,80	07900	78,80	07900	92,27	079
8,00	8	79	41	29	36	103,30	08000	78,80	08000	78,80	08000	78,80	08000	92,27	080
8,10	10	89	47	35	40	115,80	08100	88,50	08100	88,50	08100	88,50	08100	106,70	081
8,20	10	89	47	35	40	115,80	08200	88,50	08200	88,50	08200	88,50	08200	106,70	082
8,30	10	89	47	35	40	115,80	08300	88,50	08300	88,50	08300	88,50	08300	106,70	083
8,40	10	89	47	35	40	115,80	08400	88,50	08400	88,50	08400	88,50	08400	106,70	084
8,50	10	89	47	35	40	115,80	08500	88,50	08500	88,50	08500	88,50	08500	106,70	085
8,60	10	89	47	35	40	115,80	08600	88,50	08600	88,50	08600	88,50	08600	106,70	086
8,70	10	89	47	35	40	115,80	08700	88,50	08700	88,50	08700	88,50	08700	106,70	087
8,80	10	89	47	35	40	115,80	08800	88,50	08800	88,50	08800	88,50	08800	106,70	088
8,90	10	89	47	35	40	115,80	08900	88,50	08900	88,50	08900	88,50	08900	106,70	089
9,00	10	89	47	35	40	115,80	09000	88,50	09000	88,50	09000	88,50	09000	106,70	090
9,10	10	89	47	35	40	115,80	09100	88,50	09100	88,50	09100	88,50	09100	106,70	091
9,20	10	89	47	35	40	115,80	09200	88,50	09200	88,50	09200	88,50	09200	106,70	092
9,30	10	89	47	35	40	115,80	09300	88,50	09300	88,50	09300	88,50	09300	106,70	093
9,35	10	89	47	35	40			88,50	09350	88,50	09350	88,50	09350	106,70	930
9,40	10	89	47	35	40	115,80	09400	88,50	09400	88,50	09400	88,50	09400	106,70	094
9,45	10	89	47	35	40			88,50	09450	88,50	09450	88,50	09450	106,70	994
9,50	10	89	47	35	40	115,80	09500	88,50	09500	88,50	09500	88,50	09500	106,70	095
9,60	10	89	47	35	40	115,80	09600	88,50	09600	88,50	09600	88,50	09600	106,70	096
9,70	10	89	47	35	40	115,80	09700	88,50	09700	88,50	09700	88,50	09700	106,70	097

P	●	●	●	●	○	
M	●				●	
K	●	●	●	●	○	
N					○	
S					●	
H		○	○	○		
O						

→ v_c Page 110–114

ⓘ **Ø DC$_{m7}$** for Type UNI and VA / **Ø DC$_{h7}$** for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



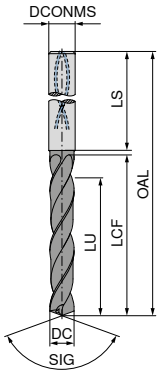

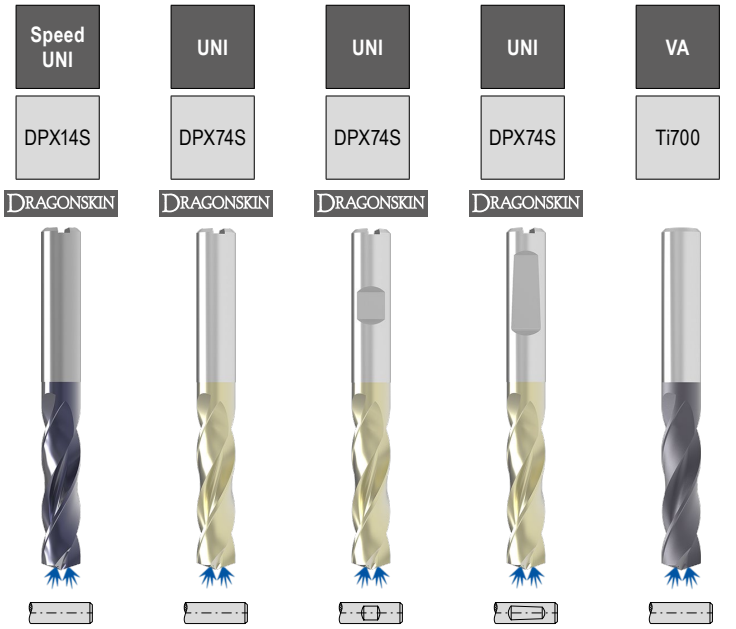

						SIG 145° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
						10 781 ...		11 780 ...		11 781 ...		11 779 ...		10 734 ...	
DC m7/h7	DCONMS h6	OAL	LCF	LU	LS	EUR		EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	T4		T7		T7		T7		T5	
9,80	10	89	47	35	40	115,80	09800	88,50	09800	88,50	09800	88,50	09800	106,70	098
9,90	10	89	47	35	40	115,80	09900	88,50	09900	88,50	09900	88,50	09900	106,70	099
10,00	10	89	47	35	40	115,80	10000	88,50	10000	88,50	10000	88,50	10000	106,70	100
10,10	12	102	55	40	45	165,20	10100	124,60	10100	124,60	10100	124,60	10100	150,60	101
10,20	12	102	55	40	45	165,20	10200	124,60	10200	124,60	10200	124,60	10200	150,60	102
10,30	12	102	55	40	45	165,20	10300	124,60	10300	124,60	10300	124,60	10300	150,60	103
10,40	12	102	55	40	45	165,20	10400	124,60	10400	124,60	10400	124,60	10400	150,60	104
10,50	12	102	55	40	45	165,20	10500	124,60	10500	124,60	10500	124,60	10500	150,60	105
10,55	12	102	55	40	45			124,60	10550	124,60	10550	124,60	10550	150,60	932
10,60	12	102	55	40	45	165,20	10600	124,60	10600	124,60	10600	124,60	10600	150,60	106
10,70	12	102	55	40	45	165,20	10700	124,60	10700	124,60	10700	124,60	10700	150,60	107
10,75	12	102	55	40	45			124,60	10750	124,60	10750	124,60	10750		
10,80	12	102	55	40	45	165,20	10800	124,60	10800	124,60	10800	124,60	10800	150,60	108
10,90	12	102	55	40	45	165,20	10900	124,60	10900	124,60	10900	124,60	10900	150,60	109
11,00	12	102	55	40	45	165,20	11000	124,60	11000	124,60	11000	124,60	11000	150,60	110
11,10	12	102	55	40	45	165,20	11100	124,60	11100	124,60	11100	124,60	11100	150,60	111
11,20	12	102	55	40	45	165,20	11200	124,60	11200	124,60	11200	124,60	11200	150,60	112
11,25	12	102	55	40	45			124,60	11250	124,60	11250	124,60	11250	150,60	912
11,30	12	102	55	40	45	165,20	11300	124,60	11300	124,60	11300	124,60	11300	150,60	113
11,35	12	102	55	40	45			124,60	11350	124,60	11350	124,60	11350	150,60	913
11,40	12	102	55	40	45	165,20	11400	124,60	11400	124,60	11400	124,60	11400	150,60	114
11,45	12	102	55	40	45			124,60	11450	124,60	11450	124,60	11450	150,60	914
11,50	12	102	55	40	45	165,20	11500	124,60	11500	124,60	11500	124,60	11500	150,60	115
11,60	12	102	55	40	45	165,20	11600	124,60	11600	124,60	11600	124,60	11600	150,60	116
11,70	12	102	55	40	45	165,20	11700	124,60	11700	124,60	11700	124,60	11700	150,60	117
11,80	12	102	55	40	45	165,20	11800	124,60	11800	124,60	11800	124,60	11800	150,60	118
11,90	12	102	55	40	45	165,20	11900	124,60	11900	124,60	11900	124,60	11900	150,60	119
12,00	12	102	55	40	45	165,20	12000	124,60	12000	124,60	12000	124,60	12000	150,60	120
12,15	14	107	60	43	45			175,30	12150	175,30	12150	175,30	12150	204,40	921
12,25	14	107	60	43	45			175,30	12250	175,30	12250	175,30	12250		
12,50	14	107	60	43	45	231,70	12500	175,30	12500	175,30	12500	175,30	12500	204,40	125
12,55	14	107	60	43	45			175,30	12550	175,30	12550	175,30	12550	204,40	925
12,70	14	107	60	43	45			175,30	12700	175,30	12700	175,30	12700		
12,80	14	107	60	43	45	231,70	12800	175,30	12800	175,30	12800	175,30	12800	204,40	128
12,90	14	107	60	43	45			175,30	12900	175,30	12900	175,30	12900		
13,00	14	107	60	43	45	231,70	13000	175,30	13000	175,30	13000	175,30	13000	204,40	130
13,10	14	107	60	43	45			175,30	13100	175,30	13100	175,30	13100		
13,30	14	107	60	43	45			175,30	13300	175,30	13300	175,30	13300		
13,35	14	107	60	43	45			175,30	13350	175,30	13350	175,30	13350	204,40	933
13,50	14	107	60	43	45	231,70	13500	175,30	13500	175,30	13500	175,30	13500	204,40	135
13,70	14	107	60	43	45			175,30	13700	175,30	13700	175,30	13700		
13,80	14	107	60	43	45	231,70	13800	175,30	13800	175,30	13800	175,30	13800	204,40	138
P						●		●		●		●		○	
M						●								●	
K						●		●		●		●		○	
N														○	
S														●	
H								○		○		○			
O															

→ v_c Page 110–114

Ø DC_{m7} for Type UNI and VA / Ø DC_{h7} for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



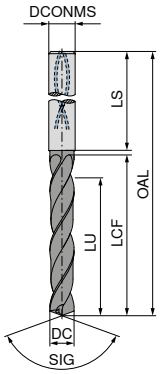

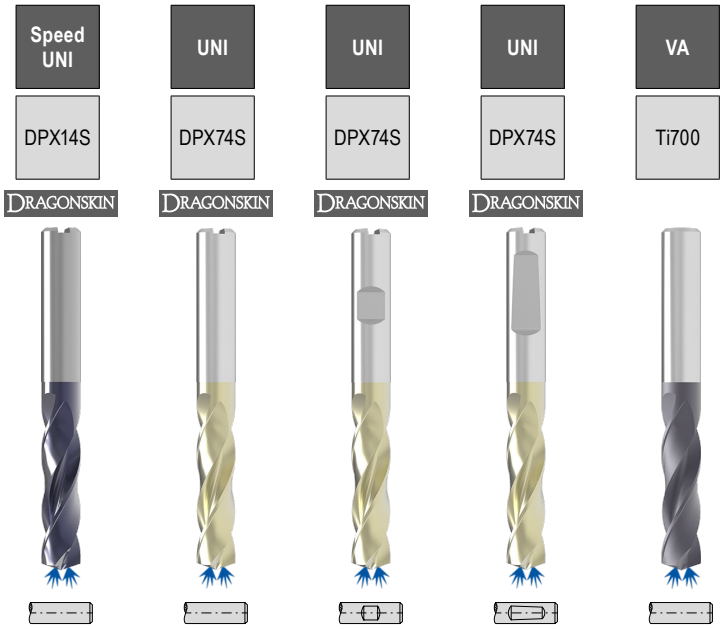

						SIG 145° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
						10 781 ...		11 780 ...		11 781 ...		11 779 ...		10 734 ...	
DC $_{m7/h7}$	DCONMS $_{h6}$	OAL	LCF	LU	LS	EUR		EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	T4		T7		T7		T7		T5	
14,00	14	107	60	43	45	231,70	14000	175,30	14000	175,30	14000	175,30	14000	204,40	140
14,20	16	115	65	45	48			210,20	14200	210,20	14200	210,20	14200		
14,50	16	115	65	45	48	276,60	14500	210,20	14500	210,20	14500	210,20	14500	256,50	145
14,80	16	115	65	45	48	276,60	14800	210,20	14800	210,20	14800	210,20	14800	256,50	148
15,00	16	115	65	45	48	276,60	15000	210,20	15000	210,20	15000	210,20	15000	256,50	150
15,10	16	115	65	45	48			210,20	15100	210,20	15100	210,20	15100		
15,25	16	115	65	45	48			210,20	15250	210,20	15250	210,20	15250		
15,30	16	115	65	45	48			210,20	15300	210,20	15300	210,20	15300		
15,35	16	115	65	45	48			210,20	15350	210,20	15350	210,20	15350	256,50	953
15,50	16	115	65	45	48	276,60	15500	210,20	15500	210,20	15500	210,20	15500	256,50	155
15,60	16	115	65	45	48			210,20	15600	210,20	15600	210,20	15600		
15,80	16	115	65	45	48	276,60	15800	210,20	15800	210,20	15800	210,20	15800	256,50	158
16,00	16	115	65	45	48	276,60	16000	210,20	16000	210,20	16000	210,20	16000	256,50	160
16,05	18	123	73	51	48			324,60	16050	324,60	16050	324,60	16050	386,80	960
16,50	18	123	73	51	48	423,10	16500	324,60	16500	324,60	16500	324,60	16500	386,80	165
16,80	18	123	73	51	48	423,10	16800	324,60	16800	324,60	16800	324,60	16800	386,80	168
16,90	18	123	73	51	48			324,60	16900	324,60	16900	324,60	16900		
17,00	18	123	73	51	48	423,10	17000	324,60	17000	324,60	17000	324,60	17000	386,80	170
17,50	18	123	73	51	48	423,10	17500	324,60	17500	324,60	17500	324,60	17500	386,80	175
17,60	18	123	73	51	48			324,60	17600	324,60	17600	324,60	17600		
17,80	18	123	73	51	48	423,10	17800	324,60	17800	324,60	17800	324,60	17800	386,80	178
18,00	18	123	73	51	48	423,10	18000	324,60	18000	324,60	18000	324,60	18000	386,80	180
18,50	20	131	79	55	50	459,10	18500	355,00	18500	355,00	18500	355,00	18500	498,30	185
18,80	20	131	79	55	50	459,10	18800	355,00	18800	355,00	18800	355,00	18800	498,30	188
18,90	20	131	79	55	50			355,00	18900	355,00	18900	355,00	18900		
19,00	20	131	79	55	50	459,10	19000	355,00	19000	355,00	19000	355,00	19000	498,30	190
19,35	20	131	79	55	50			355,00	19350	355,00	19350	355,00	19350	498,30	993
19,50	20	131	79	55	50	459,10	19500	355,00	19500	355,00	19500	355,00	19500	498,30	195
19,60	20	131	79	55	50			355,00	19600	355,00	19600	355,00	19600		
19,80	20	131	79	55	50	459,10	19800	355,00	19800	355,00	19800	355,00	19800	498,30	198
20,00	20	131	79	55	50	459,10	20000	355,00	20000	355,00	20000	355,00	20000	498,30	200
20,50	25	151	93	66	56			641,80	20500	641,80	20500	641,80	20500		
21,00	25	151	93	66	56			641,80	21000	641,80	21000	641,80	21000		
21,50	25	151	93	66	56			641,80	21500	641,80	21500	641,80	21500		
22,00	25	151	93	66	56			641,80	22000	641,80	22000	641,80	22000		
22,50	25	153	96	72	56			641,80	22500	641,80	22500	641,80	22500		
23,00	25	153	96	72	56			641,80	23000	641,80	23000	641,80	23000		
23,50	25	153	96	72	56			641,80	23500	641,80	23500	641,80	23500		
24,00	25	153	96	72	56			641,80	24000	641,80	24000	641,80	24000		
24,50	25	153	96	75	56			641,80	24500	641,80	24500	641,80	24500		
25,00	25	153	96	75	56			641,80	25000	641,80	25000	641,80	25000		
P						●		●		●		●		○	
M						●								●	
K						●		●		●		●		○	
N														○	
S														●	
H								○		○		○			
O															

→ v_c Page 110–114

Ø DC_{m7} for Type UNI and VA / Ø DC_{h7} for Type Speed UNI

High Performance Drill, DIN 6537



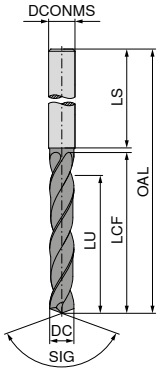

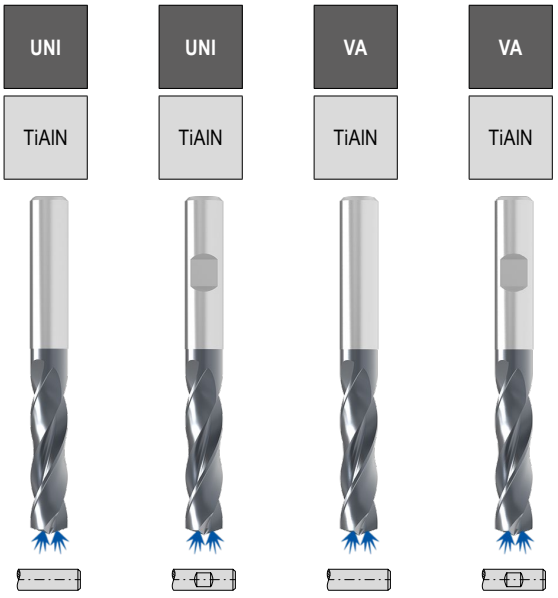

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	**11 700 ...** EUR T1/9C		**11 701 ...** EUR T1/9C		**11 713 ...** EUR T1/9C		**11 714 ...** EUR T1/9C	
1,00	4	45	7	5,5	28	39,21	01000			40,05	01000		
1,10	4	45	7	5,3	28	39,21	01100			40,05	01100		
1,20	4	45	7	5,2	28	39,21	01200			40,05	01200		
1,30	4	45	7	5,0	28	39,21	01300			40,05	01300		
1,40	4	45	7	4,9	28	39,21	01400			40,05	01400		
1,50	4	55	14	11,7	28	39,21	01500			40,05	01500		
1,60	4	55	14	11,6	28	39,21	01600			40,05	01600		
1,70	4	55	14	11,4	28	39,21	01700			40,05	01700		
1,80	4	55	14	11,3	28	39,21	01800			40,05	01800		
1,90	4	55	14	11,1	28	39,21	01900			40,05	01900		
2,00	4	55	20	17,0	28	39,21	02000			40,05	02000		
2,10	4	55	20	16,8	28	39,21	02100			40,05	02100		
2,20	4	55	20	16,7	28	39,21	02200			40,05	02200		
2,30	4	55	20	16,5	28	39,21	02300			40,05	02300		
2,40	4	55	20	16,4	28	39,21	02400			40,05	02400		
2,50	4	55	20	16,2	28	39,21	02500			40,05	02500		
2,60	4	55	20	16,1	28	39,21	02600			40,05	02600		
2,70	4	55	20	15,9	28	39,21	02700			40,05	02700		
2,80	4	55	20	15,8	28	39,21	02800			40,05	02800		
2,90	4	55	20	15,6	28	39,21	02900			40,05	02900		
3,00	6	62	20	15,5	36	34,12	03000	34,12	03000	34,82	03000	34,82	03000
3,10	6	62	20	15,3	36	34,12	03100	34,12	03100	34,82	03100	34,82	03100
3,20	6	62	20	15,2	36	34,12	03200	34,12	03200	34,82	03200	34,82	03200
3,25	6	62	20	15,1	36	34,12	03250	34,12	03250				
3,30	6	62	20	15,0	36	34,12	03300	34,12	03300	34,82	03300	34,82	03300
3,40	6	62	20	14,9	36	34,12	03400	34,12	03400	34,82	03400	34,82	03400
3,50	6	62	20	14,7	36	34,12	03500	34,12	03500	34,82	03500	34,82	03500
3,60	6	62	20	14,6	36	34,12	03600	34,12	03600	34,82	03600	34,82	03600
3,70	6	62	20	14,4	36	34,12	03700	34,12	03700	34,82	03700	34,82	03700
3,80	6	66	24	18,3	36	34,12	03800	34,12	03800	34,82	03800	34,82	03800
3,90	6	66	24	18,1	36	34,12	03900	34,12	03900	34,82	03900	34,82	03900
4,00	6	66	24	18,0	36	34,12	04000	34,12	04000	34,82	04000	34,82	04000
4,10	6	66	24	17,8	36	34,12	04100	34,12	04100	34,82	04100	34,82	04100
4,20	6	66	24	17,7	36	34,12	04200	34,12	04200	34,82	04200	34,82	04200
4,30	6	66	24	17,5	36	34,12	04300	34,12	04300	34,82	04300	34,82	04300
4,40	6	66	24	17,4	36	34,12	04400	34,12	04400	34,82	04400	34,82	04400
4,50	6	66	24	17,2	36	34,12	04500	34,12	04500	34,82	04500	34,82	04500
4,60	6	66	24	17,1	36	34,12	04600	34,12	04600	34,82	04600	34,82	04600
4,65	6	66	24	17,0	36	34,12	04650	34,12	04650				
4,70	6	66	24	16,9	36	34,12	04700	34,12	04700	34,82	04700	34,82	04700
4,80	6	66	28	20,8	36	34,12	04800	34,12	04800	34,82	04800	34,82	04800

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

Continued on next page

High Performance Drill, DIN 6537



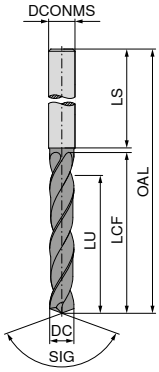

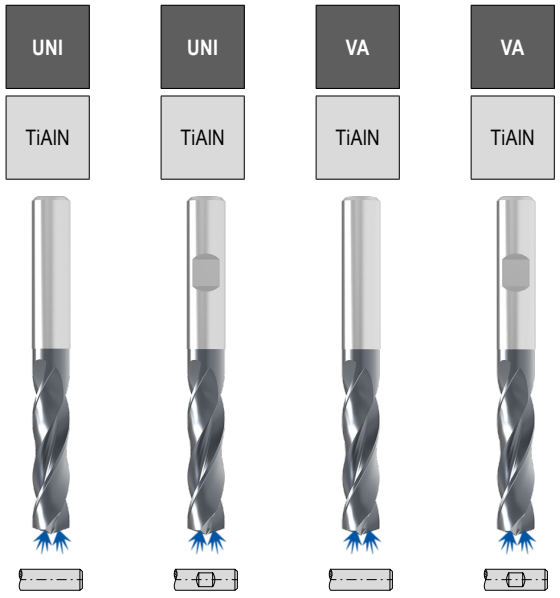

						SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
						11 700 ...	**11 701 ...**	**11 713 ...**	**11 714 ...**
DC $_{m7/h7}$ **mm**	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T1/9C	EUR T1/9C	EUR T1/9C	EUR T1/9C
4,90	6	66	28	20,6	36	34,12 **04900**	34,12 **04900**	34,82 **04900**	34,82 **04900**
5,00	6	66	28	20,5	36	34,12 **05000**	34,12 **05000**	34,82 **05000**	34,82 **05000**
5,10	6	66	28	20,3	36	34,12 **05100**	34,12 **05100**	34,82 **05100**	34,82 **05100**
5,20	6	66	28	20,2	36	34,12 **05200**	34,12 **05200**	34,82 **05200**	34,82 **05200**
5,30	6	66	28	20,0	36	34,12 **05300**	34,12 **05300**	34,82 **05300**	34,82 **05300**
5,40	6	66	28	19,9	36	34,12 **05400**	34,12 **05400**	34,82 **05400**	34,82 **05400**
5,50	6	66	28	19,7	36	34,12 **05500**	34,12 **05500**	34,82 **05500**	34,82 **05500**
5,55	6	66	28	19,6	36	34,12 **05550**	34,12 **05550**		
5,60	6	66	28	19,6	36	34,12 **05600**	34,12 **05600**	34,82 **05600**	34,82 **05600**
5,65	6	66	28	19,5	36	34,12 **05650**	34,12 **05650**		
5,70	6	66	28	19,4	36	34,12 **05700**	34,12 **05700**	34,82 **05700**	34,82 **05700**
5,80	6	66	28	19,3	36	34,12 **05800**	34,12 **05800**	34,82 **05800**	34,82 **05800**
5,90	6	66	28	19,1	36	34,12 **05900**	34,12 **05900**	34,82 **05900**	34,82 **05900**
6,00	6	66	28	19,0	36	34,12 **06000**	34,12 **06000**	34,82 **06000**	34,82 **06000**
6,10	8	79	34	24,8	36	46,60 **06100**	46,60 **06100**	47,57 **06100**	47,57 **06100**
6,20	8	79	34	24,7	36	46,60 **06200**	46,60 **06200**	47,57 **06200**	47,57 **06200**
6,30	8	79	34	24,5	36	46,60 **06300**	46,60 **06300**	47,57 **06300**	47,57 **06300**
6,40	8	79	34	24,4	36	46,60 **06400**	46,60 **06400**	47,57 **06400**	47,57 **06400**
6,50	8	79	34	24,2	36	46,60 **06500**	46,60 **06500**	47,57 **06500**	47,57 **06500**
6,60	8	79	34	24,1	36	46,60 **06600**	46,60 **06600**	47,57 **06600**	47,57 **06600**
6,70	8	79	34	23,9	36	46,60 **06700**	46,60 **06700**	47,57 **06700**	47,57 **06700**
6,80	8	79	34	23,8	36	46,60 **06800**	46,60 **06800**	47,57 **06800**	47,57 **06800**
6,90	8	79	34	23,6	36	46,60 **06900**	46,60 **06900**	47,57 **06900**	47,57 **06900**
7,00	8	79	34	23,5	36	46,60 **07000**	46,60 **07000**	47,57 **07000**	47,57 **07000**
7,10	8	79	41	30,3	36	46,60 **07100**	46,60 **07100**	47,57 **07100**	47,57 **07100**
7,20	8	79	41	30,2	36	46,60 **07200**	46,60 **07200**	47,57 **07200**	47,57 **07200**
7,30	8	79	41	30,0	36	46,60 **07300**	46,60 **07300**	47,57 **07300**	47,57 **07300**
7,40	8	79	41	29,9	36	46,60 **07400**	46,60 **07400**	47,57 **07400**	47,57 **07400**
7,50	8	79	41	29,7	36	46,60 **07500**	46,60 **07500**	47,57 **07500**	47,57 **07500**
7,55	8	79	41	29,6	36	46,60 **07550**	46,60 **07550**		
7,60	8	79	41	29,6	36	46,60 **07600**	46,60 **07600**	47,57 **07600**	47,57 **07600**
7,65	8	79	41	29,5	36	46,60 **07650**	46,60 **07650**		
7,70	8	79	41	29,4	36	46,60 **07700**	46,60 **07700**	47,57 **07700**	47,57 **07700**
7,80	8	79	41	29,3	36	46,60 **07800**	46,60 **07800**	47,57 **07800**	47,57 **07800**
7,90	8	79	41	29,1	36	46,60 **07900**	46,60 **07900**	47,57 **07900**	47,57 **07900**
8,00	8	79	41	29,0	36	46,60 **08000**	46,60 **08000**	47,57 **08000**	47,57 **08000**
8,10	10	89	47	34,8	40	52,82 **08100**	52,82 **08100**	53,92 **08100**	53,92 **08100**
8,20	10	89	47	34,7	40	52,82 **08200**	52,82 **08200**	53,92 **08200**	53,92 **08200**
8,30	10	89	47	34,5	40	52,82 **08300**	52,82 **08300**	53,92 **08300**	53,92 **08300**
8,40	10	89	47	34,4	40	52,82 **08400**	52,82 **08400**	53,92 **08400**	53,92 **08400**
8,50	10	89	47	34,2	40	52,82 **08500**	52,82 **08500**	53,92 **08500**	53,92 **08500**
P						●	●	○	○
M						●	●	●	●
K						●	●		
N						○	○	●	●
S								○	○
H									
O								○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

Continued on next page

High Performance Drill, DIN 6537



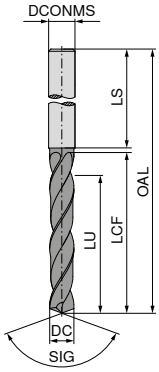

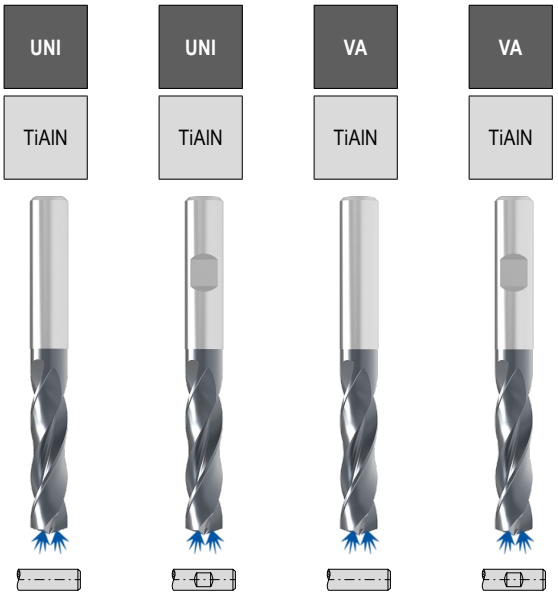

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	11 700 ... EUR T1/9C		11 701 ... EUR T1/9C		11 713 ... EUR T1/9C		11 714 ... EUR T1/9C	
8,60	10	89	47	34,1	40	52,82	08600	52,82	08600	53,92	08600	53,92	08600
8,70	10	89	47	33,9	40	52,82	08700	52,82	08700	53,92	08700	53,92	08700
8,80	10	89	47	33,8	40	52,82	08800	52,82	08800	53,92	08800	53,92	08800
8,90	10	89	47	33,6	40	52,82	08900	52,82	08900	53,92	08900	53,92	08900
9,00	10	89	47	33,5	40	52,82	09000	52,82	09000	53,92	09000	53,92	09000
9,10	10	89	47	33,3	40	52,82	09100	52,82	09100	53,92	09100	53,92	09100
9,20	10	89	47	33,2	40	52,82	09200	52,82	09200	53,92	09200	53,92	09200
9,30	10	89	47	33,0	40	52,82	09300	52,82	09300	53,92	09300	53,92	09300
9,40	10	89	47	32,9	40	52,82	09400	52,82	09400	53,92	09400	53,92	09400
9,50	10	89	47	32,7	40	52,82	09500	52,82	09500	53,92	09500	53,92	09500
9,60	10	89	47	32,6	40	52,82	09600	52,82	09600	53,92	09600	53,92	09600
9,70	10	89	47	32,4	40	52,82	09700	52,82	09700	53,92	09700	53,92	09700
9,80	10	89	47	32,3	40	52,82	09800	52,82	09800	53,92	09800	53,92	09800
9,90	10	89	47	32,1	40	52,82	09900	52,82	09900	53,92	09900	53,92	09900
10,00	10	89	47	32,0	40	52,82	10000	52,82	10000	53,92	10000	53,92	10000
10,10	12	102	55	39,8	45	76,13	10100	76,13	10100	77,69	10100	77,69	10100
10,20	12	102	55	39,7	45	76,13	10200	76,13	10200	77,69	10200	77,69	10200
10,30	12	102	55	39,5	45	76,13	10300	76,13	10300	77,69	10300	77,69	10300
10,40	12	102	55	39,4	45	76,13	10400	76,13	10400	77,69	10400	77,69	10400
10,50	12	102	55	39,2	45	76,13	10500	76,13	10500	77,69	10500	77,69	10500
10,60	12	102	55	39,1	45	76,13	10600	76,13	10600	77,69	10600	77,69	10600
10,70	12	102	55	38,9	45	76,13	10700	76,13	10700	77,69	10700	77,69	10700
10,80	12	102	55	38,8	45	76,13	10800	76,13	10800	77,69	10800	77,69	10800
10,90	12	102	55	38,6	45	76,13	10900	76,13	10900	77,69	10900	77,69	10900
11,00	12	102	55	38,5	45	76,13	11000	76,13	11000	77,69	11000	77,69	11000
11,10	12	102	55	38,3	45	76,13	11100	76,13	11100	77,69	11100	77,69	11100
11,20	12	102	55	38,2	45	76,13	11200	76,13	11200	77,69	11200	77,69	11200
11,30	12	102	55	38,0	45	76,13	11300	76,13	11300	77,69	11300	77,69	11300
11,40	12	102	55	37,9	45	76,13	11400	76,13	11400	77,69	11400	77,69	11400
11,50	12	102	55	37,7	45	76,13	11500	76,13	11500	77,69	11500	77,69	11500
11,60	12	102	55	37,6	45	76,13	11600	76,13	11600	77,69	11600	77,69	11600
11,70	12	102	55	37,4	45	76,13	11700	76,13	11700	77,69	11700	77,69	11700
11,80	12	102	55	37,3	45	76,13	11800	76,13	11800	77,69	11800	77,69	11800
11,90	12	102	55	37,1	45	76,13	11900	76,13	11900	77,69	11900	77,69	11900
12,00	12	102	55	37,0	45	76,13	12000	76,13	12000	77,69	12000	77,69	12000
12,20	14	107	60	41,7	45	102,00	12200	102,00	12200	104,10	12200	104,10	12200
12,30	14	107	60	41,5	45	102,00	12300	102,00	12300	104,10	12300	104,10	12300
12,50	14	107	60	41,2	45	102,00	12500	102,00	12500	104,10	12500	104,10	12500
12,70	14	107	60	40,9	45	102,00	12700	102,00	12700	104,10	12700	104,10	12700
12,80	14	107	60	40,8	45	102,00	12800	102,00	12800	104,10	12800	104,10	12800
12,90	14	107	60	40,6	45	102,00	12900	102,00	12900	104,10	12900	104,10	12900

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA

Continued on next page

High Performance Drill, DIN 6537



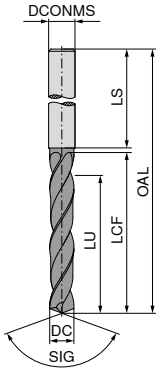

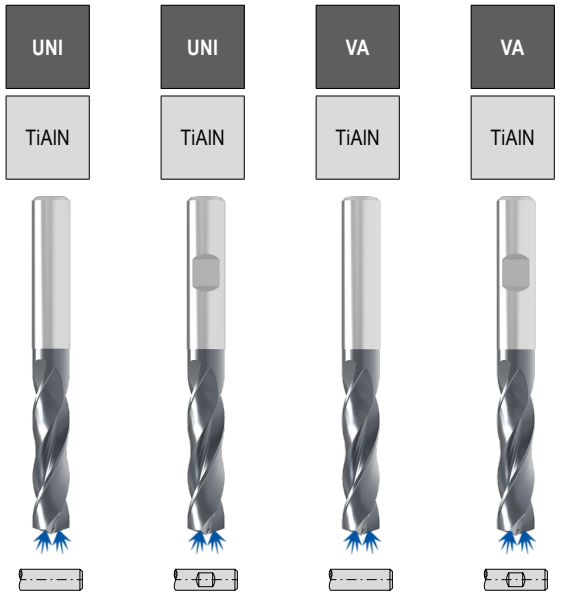

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	11 700 ... EUR T1/9C		11 701 ... EUR T1/9C		11 713 ... EUR T1/9C		11 714 ... EUR T1/9C	
13,00	14	107	60	40,5	45	102,00	**13000**	102,00	**13000**	104,10	**13000**	104,10	**13000**
13,50	14	107	60	39,7	45	102,00	**13500**	102,00	**13500**	104,10	**13500**	104,10	**13500**
13,70	14	107	60	39,4	45					104,10	**13700**	104,10	**13700**
13,80	14	107	60	39,3	45	102,00	**13800**	102,00	**13800**	104,10	**13800**	104,10	**13800**
14,00	14	107	60	39,0	45	102,00	**14000**	102,00	**14000**	104,10	**14000**	104,10	**14000**
14,20	16	115	65	43,7	48	131,60	**14200**	131,60	**14200**	134,40	**14200**	134,40	**14200**
14,40	16	115	65	43,4	48	131,60	**14400**	131,60	**14400**	134,40	**14400**	134,40	**14400**
14,50	16	115	65	43,2	48	131,60	**14500**	131,60	**14500**	134,40	**14500**	134,40	**14500**
14,70	16	115	65	42,9	48					134,40	**14700**	134,40	**14700**
14,80	16	115	65	42,8	48	131,60	**14800**	131,60	**14800**	134,40	**14800**	134,40	**14800**
15,00	16	115	65	42,5	48	131,60	**15000**	131,60	**15000**	134,40	**15000**	134,40	**15000**
15,10	16	115	65	42,3	48	131,60	**15100**	131,60	**15100**	134,40	**15100**	134,40	**15100**
15,20	16	115	65	42,2	48	131,60	**15200**	131,60	**15200**	134,40	**15200**	134,40	**15200**
15,50	16	115	65	41,7	48	131,60	**15500**	131,60	**15500**	134,40	**15500**	134,40	**15500**
15,70	16	115	65	41,4	48					134,40	**15700**	134,40	**15700**
15,80	16	115	65	41,3	48	131,60	**15800**	131,60	**15800**	134,40	**15800**	134,40	**15800**
16,00	16	115	65	41,0	48	131,60	**16000**	131,60	**16000**	134,40	**16000**	134,40	**16000**
16,50	18	123	73	48,2	48	199,80	**16500**	199,80	**16500**	203,90	**16500**	203,90	**16500**
17,00	18	123	73	47,5	48	199,80	**17000**	199,80	**17000**	203,90	**17000**	203,90	**17000**
17,50	18	123	73	46,7	48	199,80	**17500**	199,80	**17500**	203,90	**17500**	203,90	**17500**
18,00	18	123	73	46,0	48	199,80	**18000**	199,80	**18000**	203,90	**18000**	203,90	**18000**
18,50	20	131	79	51,2	50	220,20	**18500**	220,20	**18500**	224,70	**18500**	224,70	**18500**
18,90	20	131	79	50,6	50	220,20	**18900**	220,20	**18900**	224,70	**18900**	224,70	**18900**
19,00	20	131	79	50,5	50	220,20	**19000**	220,20	**19000**	224,70	**19000**	224,70	**19000**
19,30	20	131	79	50,0	50	220,20	**19300**	220,20	**19300**	224,70	**19300**	224,70	**19300**
19,50	20	131	79	49,7	50	220,20	**19500**	220,20	**19500**	224,70	**19500**	224,70	**19500**
20,00	20	131	79	49,0	50	220,20	**20000**	220,20	**20000**	224,70	**20000**	224,70	**20000**

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

WTX – High-performance drill, DIN 6537

▲ Specialist for difficult to machine materials





Ti

DPA54

DRAGONSKIN

SIG 140°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 786 ... EUR T4/9F	
3,00	6	62	20	14	36	73,15	030
3,10	6	62	20	14	36	73,15	031
3,20	6	62	20	14	36	73,15	032
3,30	6	62	20	14	36	73,15	033
3,40	6	62	20	14	36	73,15	034
3,50	6	62	20	14	36	73,15	035
3,60	6	62	20	14	36	73,15	036
3,70	6	62	20	14	36	73,15	037
3,80	6	66	24	17	36	73,15	038
3,90	6	66	24	17	36	73,15	039
3,97	6	66	24	17	36	73,15	900
4,00	6	66	24	17	36	73,15	040
4,10	6	66	24	17	36	73,15	041
4,20	6	66	24	17	36	73,15	042
4,23	6	66	24	17	36	73,15	901
4,30	6	66	24	17	36	73,15	043
4,40	6	66	24	17	36	73,15	044
4,50	6	66	24	17	36	73,15	045
4,60	6	66	24	17	36	73,15	046
4,70	6	66	24	17	36	73,15	047
4,80	6	66	28	20	36	73,15	048
4,90	6	66	28	20	36	73,15	049
5,00	6	66	28	20	36	73,15	050
5,10	6	66	28	20	36	73,15	051
5,20	6	66	28	20	36	73,15	052
5,30	6	66	28	20	36	73,15	053
5,40	6	66	28	20	36	73,15	054
5,50	6	66	28	20	36	73,15	055
5,56	6	66	28	20	36	73,15	902
5,60	6	66	28	20	36	73,15	056
5,70	6	66	28	20	36	73,15	057
5,80	6	66	28	20	36	73,15	058
5,90	6	66	28	20	36	73,15	059
6,00	6	66	28	20	36	73,15	060
6,10	8	79	34	24	36	98,22	061
6,20	8	79	34	24	36	98,22	062
6,30	8	79	34	24	36	98,22	063
6,35	8	79	34	24	36	98,22	903
6,40	8	79	34	24	36	98,22	064
6,50	8	79	34	24	36	98,22	065
6,60	8	79	34	24	36	98,22	066
6,70	8	79	34	24	36	98,22	067
6,80	8	79	34	24	36	98,22	068
6,90	8	79	34	24	36	98,22	069
7,00	8	79	34	24	36	98,22	070
7,10	8	79	41	29	36	98,22	071
7,20	8	79	41	29	36	98,22	072
7,30	8	79	41	29	36	98,22	073
7,40	8	79	41	29	36	98,22	074
7,50	8	79	41	29	36	98,22	075
7,60	8	79	41	29	36	98,22	076

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 786 ... EUR T4/9F	
7,70	8	79	41	29	36	98,22	077
7,80	8	79	41	29	36	98,22	078
7,90	8	79	41	29	36	98,22	079
7,94	8	79	41	29	36	98,22	904
8,00	8	79	41	29	36	98,22	080
8,10	10	89	47	35	40	118,80	081
8,20	10	89	47	35	40	118,80	082
8,30	10	89	47	35	40	118,80	083
8,40	10	89	47	35	40	118,80	084
8,50	10	89	47	35	40	118,80	085
8,60	10	89	47	35	40	118,80	086
8,70	10	89	47	35	40	118,80	087
8,80	10	89	47	35	40	118,80	088
8,90	10	89	47	35	40	118,80	089
9,00	10	89	47	35	40	118,80	090
9,10	10	89	47	35	40	118,80	091
9,20	10	89	47	35	40	118,80	092
9,30	10	89	47	35	40	118,80	093
9,40	10	89	47	35	40	118,80	094
9,50	10	89	47	35	40	118,80	095
9,53	10	89	47	35	40	118,80	905
9,60	10	89	47	35	40	118,80	096
9,70	10	89	47	35	40	118,80	097
9,80	10	89	47	35	40	118,80	098
9,90	10	89	47	35	40	118,80	099
10,00	10	89	47	35	40	118,80	100
10,10	12	102	55	40	45	170,90	101
10,20	12	102	55	40	45	170,90	102
10,30	12	102	55	40	45	170,90	103
10,40	12	102	55	40	45	170,90	104
10,50	12	102	55	40	45	170,90	105
10,60	12	102	55	40	45	170,90	106
10,70	12	102	55	40	45	170,90	107
10,80	12	102	55	40	45	170,90	108
10,90	12	102	55	40	45	170,90	109
11,00	12	102	55	40	45	170,90	110
11,10	12	102	55	40	45	170,90	111
11,11	12	102	55	40	45	170,90	906
11,20	12	102	55	40	45	170,90	112
11,30	12	102	55	40	45	170,90	113
11,40	12	102	55	40	45	170,90	114
11,50	12	102	55	40	45	170,90	115
11,60	12	102	55	40	45	170,90	116
11,70	12	102	55	40	45	170,90	117
11,80	12	102	55	40	45	170,90	118
11,90	12	102	55	40	45	170,90	119
12,00	12	102	55	40	45	170,90	120
12,10	14	107	60	43	45	221,60	121
12,20	14	107	60	43	45	221,60	122
12,30	14	107	60	43	45	221,60	123
12,40	14	107	60	43	45	221,60	124
12,50	14	107	60	43	45	221,60	125
12,60	14	107	60	43	45	221,60	126
12,70	14	107	60	43	45	221,60	907
12,80	14	107	60	43	45	221,60	128
12,90	14	107	60	43	45	221,60	129
13,00	14	107	60	43	45	221,60	130
13,10	14	107	60	43	45	221,60	131
13,20	14	107	60	43	45	221,60	132
13,30	14	107	60	43	45	221,60	133
13,40	14	107	60	43	45	221,60	134
13,50	14	107	60	43	45	221,60	135
13,60	14	107	60	43	45	221,60	136
13,70	14	107	60	43	45	221,60	137
13,80	14	107	60	43	45	221,60	138
13,90	14	107	60	43	45	221,60	139

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c Page 109

Continued on next page

WTX – High-performance drill, DIN 6537

▲ Specialist for difficult to machine materials





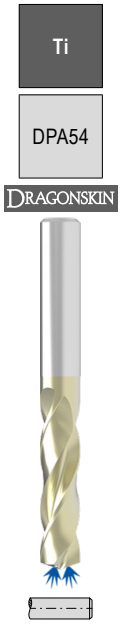

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 786 ... EUR T4/9F	
14,0	14	107	60	43	45	221,60	140
14,1	16	115	65	45	48	263,60	141
14,2	16	115	65	45	48	263,60	142
14,3	16	115	65	45	48	263,60	143
14,4	16	115	65	45	48	263,60	144
14,5	16	115	65	45	48	263,60	145
14,6	16	115	65	45	48	263,60	146
14,7	16	115	65	45	48	263,60	147
14,8	16	115	65	45	48	263,60	148
14,9	16	115	65	45	48	263,60	149
15,0	16	115	65	45	48	263,60	150
15,1	16	115	65	45	48	263,60	151
15,2	16	115	65	45	48	263,60	152
15,3	16	115	65	45	48	263,60	153
15,4	16	115	65	45	48	263,60	154
15,5	16	115	65	45	48	263,60	155
15,6	16	115	65	45	48	263,60	156
15,7	16	115	65	45	48	263,60	157
15,8	16	115	65	45	48	263,60	158
15,9	16	115	65	45	48	263,60	159
16,0	16	115	65	45	48	263,60	160
16,1	18	123	73	51	48	263,60	161
16,2	18	123	73	51	48	263,60	162
16,3	18	123	73	51	48	263,60	163
16,4	18	123	73	51	48	263,60	164
16,5	18	123	73	51	48	370,90	165
16,6	18	123	73	51	48	370,90	166
16,7	18	123	73	51	48	370,90	167
16,8	18	123	73	51	48	370,90	168
16,9	18	123	73	51	48	370,90	169
17,0	18	123	73	51	48	370,90	170
17,1	18	123	73	51	48	370,90	171
17,2	18	123	73	51	48	370,90	172
17,3	18	123	73	51	48	370,90	173
17,4	18	123	73	51	48	370,90	174
17,5	18	123	73	51	48	370,90	175
17,6	18	123	73	51	48	370,90	176
17,7	18	123	73	51	48	370,90	177
17,8	18	123	73	51	48	370,90	178
17,9	18	123	73	51	48	370,90	179
18,0	18	123	73	51	48	370,90	180
18,1	20	131	79	55	50	463,50	181
18,2	20	131	79	55	50	463,50	182
18,3	20	131	79	55	50	463,50	183
18,4	20	131	79	55	50	463,50	184
18,5	20	131	79	55	50	463,50	185
18,6	20	131	79	55	50	463,50	186
18,7	20	131	79	55	50	463,50	187
18,8	20	131	79	55	50	463,50	188
18,9	20	131	79	55	50	463,50	189
19,0	20	131	79	55	50	463,50	190
19,1	20	131	79	55	50	463,50	191
19,2	20	131	79	55	50	463,50	192
19,3	20	131	79	55	50	463,50	193
19,4	20	131	79	55	50	463,50	194
19,5	20	131	79	55	50	463,50	195
19,6	20	131	79	55	50	463,50	196
19,7	20	131	79	55	50	463,50	197
19,8	20	131	79	55	50	463,50	198
19,9	20	131	79	55	50	463,50	199
20,0	20	131	79	55	50	463,50	200

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c Page 109

WTX – High Performance Drill, DIN 6537

▲ universal application
▲ four guidance lands
▲ polished chip flutes
▲ Type ALU 3xD on request
▲ PL = corner chamfers





180

Ti800

SIG 180°
Solid carbide

10 720 ...

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	PL mm	EUR T4	
3,00	6	62	20	14	36	0,15	93,73	030
3,10	6	62	20	14	36	0,16	93,73	031
3,20	6	62	20	14	36	0,16	93,73	032
3,30	6	62	20	14	36	0,17	93,73	033
3,40	6	62	20	14	36	0,17	93,73	034
3,50	6	62	20	14	36	0,18	93,73	035
3,60	6	62	20	14	36	0,18	93,73	036
3,70	6	62	20	14	36	0,19	93,73	037
3,80	6	66	24	17	36	0,19	93,73	038
3,90	6	66	24	17	36	0,20	93,73	039
4,00	6	66	24	17	36	0,20	93,73	040
4,10	6	66	24	17	36	0,21	93,73	041
4,20	6	66	24	17	36	0,21	93,73	042
4,30	6	66	24	17	36	0,22	93,73	043
4,40	6	66	24	17	36	0,22	93,73	044
4,50	6	66	24	17	36	0,23	93,73	045
4,60	6	66	24	17	36	0,23	93,73	046
4,65	6	66	24	17	36	0,23	93,73	900
4,70	6	66	24	17	36	0,24	93,73	047
4,80	6	66	28	20	36	0,24	93,73	048
4,90	6	66	28	20	36	0,25	93,73	049
5,00	6	66	28	20	36	0,25	93,73	050
5,10	6	66	28	20	36	0,26	93,73	051
5,20	6	66	28	20	36	0,26	93,73	052
5,30	6	66	28	20	36	0,27	93,73	053
5,40	6	66	28	20	36	0,27	93,73	054
5,50	6	66	28	20	36	0,28	93,73	055
5,55	6	66	28	20	36	0,28	93,73	902
5,60	6	66	28	20	36	0,28	93,73	056
5,70	6	66	28	20	36	0,29	93,73	057
5,80	6	66	28	20	36	0,29	93,73	058
5,90	6	66	28	20	36	0,30	93,73	059
6,00	6	66	28	20	36	0,30	93,73	060
6,10	8	79	34	24	36	0,31	114,40	061
6,20	8	79	34	24	36	0,31	114,40	062
6,30	8	79	34	24	36	0,32	114,40	063
6,40	8	79	34	24	36	0,32	114,40	064
6,50	8	79	34	24	36	0,33	114,40	065
6,60	8	79	34	24	36	0,33	114,40	066
6,70	8	79	34	24	36	0,34	114,40	067
6,80	8	79	34	24	36	0,34	114,40	068
6,90	8	79	34	24	36	0,35	114,40	069
7,00	8	79	34	24	36	0,35	114,40	070
7,10	8	79	41	29	36	0,36	114,40	071
7,20	8	79	41	29	36	0,36	114,40	072
7,30	8	79	41	29	36	0,37	114,40	073
7,40	8	79	41	29	36	0,37	114,40	074
7,50	8	79	41	29	36	0,38	114,40	075
7,60	8	79	41	29	36	0,38	114,40	076
7,70	8	79	41	29	36	0,39	114,40	077
7,80	8	79	41	29	36	0,39	114,40	078
7,90	8	79	41	29	36	0,40	114,40	079
8,00	8	79	41	29	36	0,40	114,40	080
8,10	10	89	47	35	40	0,41	153,50	081

10 720 ...

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	PL mm	EUR T4	
8,20	10	89	47	35	40	0,41	153,50	082
8,30	10	89	47	35	40	0,42	153,50	083
8,40	10	89	47	35	40	0,42	153,50	084
8,50	10	89	47	35	40	0,43	153,50	085
8,60	10	89	47	35	40	0,43	153,50	086
8,70	10	89	47	35	40	0,44	153,50	087
8,80	10	89	47	35	40	0,44	153,50	088
8,90	10	89	47	35	40	0,45	153,50	089
9,00	10	89	47	35	40	0,45	153,50	090
9,10	10	89	47	35	40	0,46	153,50	091
9,20	10	89	47	35	40	0,46	153,50	092
9,30	10	89	47	35	40	0,47	153,50	093
9,40	10	89	47	35	40	0,47	153,50	094
9,50	10	89	47	35	40	0,48	153,50	095
9,60	10	89	47	35	40	0,48	153,50	096
9,70	10	89	47	35	40	0,49	153,50	097
9,80	10	89	47	35	40	0,49	153,50	098
9,90	10	89	47	35	40	0,50	153,50	099
10,00	10	89	47	35	40	0,50	153,50	100
10,10	12	100	53	38	45	0,51	194,30	101
10,20	12	100	53	38	45	0,51	194,30	102
10,30	12	100	53	38	45	0,52	194,30	103
10,40	12	100	53	38	45	0,52	194,30	104
10,50	12	100	53	38	45	0,53	194,30	105
10,60	12	100	53	38	45	0,53	194,30	106
10,70	12	100	53	38	45	0,54	194,30	107
10,80	12	100	53	38	45	0,54	194,30	108
10,90	12	100	53	38	45	0,55	194,30	109
11,00	12	100	53	38	45	0,55	194,30	110
11,10	12	100	53	38	45	0,56	194,30	111
11,20	12	100	53	38	45	0,56	194,30	112
11,30	12	100	53	38	45	0,57	194,30	113
11,40	12	100	53	38	45	0,57	194,30	114
11,50	12	100	53	38	45	0,58	194,30	115
11,60	12	100	53	38	45	0,58	194,30	116
11,70	12	100	53	38	45	0,59	194,30	117
11,80	12	100	53	38	45	0,59	194,30	118
11,90	12	100	53	38	45	0,60	194,30	119
12,00	12	100	53	38	45	0,60	194,30	120
12,50	14	105	58	41	45	0,63	315,70	125
12,80	14	105	58	41	45	0,64	315,70	128
13,00	14	105	58	41	45	0,65	315,70	130
13,50	14	105	58	41	45	0,68	315,70	135
13,80	14	105	58	41	45	0,69	315,70	138
14,00	14	105	58	41	45	0,70	315,70	140
14,50	16	113	63	43	48	0,73	396,90	145
14,80	16	113	63	43	48	0,74	396,90	148
15,00	16	113	63	43	48	0,75	396,90	150
15,50	16	113	63	43	48	0,78	396,90	155
15,80	16	113	63	43	48	0,79	396,90	158
16,00	16	113	63	43	48	0,80	396,90	160
16,50	18	121	71	49	48	0,83	534,40	165
16,80	18	121	71	49	48	0,84	534,40	168
17,00	18	121	71	49	48	0,85	534,40	170
17,50	18	121	71	49	48	0,88	534,40	175
17,80	18	121	71	49	48	0,89	534,40	178
18,00	18	121	71	49	48	0,90	534,40	180
18,50	20	129	77	53	50	0,93	683,70	185
18,80	20	129	77	53	50	0,94	683,70	188
19,00	20	129	77	53	50	0,95	683,70	190
19,50	20	129	77	53	50	0,98	683,70	195
19,80	20	129	77	53	50	0,99	683,70	198
20,00	20	129	77	53	50	1,00	683,70	200

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 126
→ Machining information: Page 127

WTX – High Speed Drill, DIN 6537

- ▲ Four fluted high-feed drill
- ▲ Specially designed for steel and cast iron machining
- ▲ Has four spiral coolant holes
- ▲ Innovative cutting edge geometry guarantees high positioning accuracy
- ▲ Outstanding drilling quality in terms of tolerance, surface finish and position



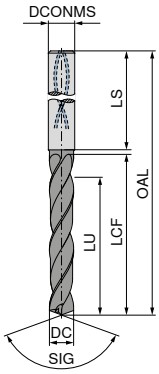

HFDS

DPX14S

DRAGONSKIN

SIG 130°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 797 ... EUR T4	
14,0	16	115	65	45	48	283,10	14000
14,3	18	123	73	51	48	352,70	14300
14,5	18	123	73	51	48	352,70	14500
15,0	18	123	73	51	48	352,70	15000
16,0	18	123	73	51	48	352,70	16000

P	●
M	○
K	●
N	○
S	
H	
O	○

→ v_c Page 125

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 797 ... EUR T4	
6,0	8	79	41	29	36	84,95	06000
6,1	10	89	47	35	40	115,80	06100
6,2	10	89	47	35	40	115,80	06200
6,3	10	89	47	35	40	115,80	06300
6,4	10	89	47	35	40	115,80	06400
6,5	10	89	47	35	40	115,80	06500
6,6	10	89	47	35	40	115,80	06600
6,7	10	89	47	35	40	115,80	06700
6,8	10	89	47	35	40	115,80	06800
6,9	10	89	47	35	40	115,80	06900
7,0	10	89	47	35	40	115,80	07000
7,1	10	89	47	35	40	115,80	07100
7,2	10	89	47	35	40	115,80	07200
7,3	10	89	47	35	40	115,80	07300
7,4	10	89	47	35	40	115,80	07400
7,5	10	89	47	35	40	115,80	07500
7,6	10	89	47	35	40	115,80	07600
7,7	10	89	47	35	40	115,80	07700
7,8	10	89	47	35	40	115,80	07800
7,9	10	89	47	35	40	115,80	07900
8,0	10	89	47	35	40	115,80	08000
8,1	12	102	55	40	45	157,10	08100
8,2	12	102	55	40	45	157,10	08200
8,3	12	102	55	40	45	157,10	08300
8,4	12	102	55	40	45	157,10	08400
8,5	12	102	55	40	45	157,10	08500
8,6	12	102	55	40	45	157,10	08600
8,7	12	102	55	40	45	157,10	08700
8,8	12	102	55	40	45	157,10	08800
8,9	12	102	55	40	45	157,10	08900
9,0	12	102	55	40	45	157,10	09000
9,1	12	102	55	40	45	157,10	09100
9,2	12	102	55	40	45	157,10	09200
9,3	12	102	55	40	45	157,10	09300
9,4	12	102	55	40	45	157,10	09400
9,5	12	102	55	40	45	157,10	09500
9,6	12	102	55	40	45	157,10	09600
9,7	12	102	55	40	45	157,10	09700
9,8	12	102	55	40	45	157,10	09800
9,9	12	102	55	40	45	157,10	09900
10,0	12	102	55	40	45	157,10	10000
10,2	14	107	60	43	45	208,50	10200
10,5	14	107	60	43	45	208,50	10500
11,0	14	107	60	43	45	208,50	11000
11,5	14	107	60	43	45	208,50	11500
12,0	14	107	60	43	45	208,50	12000
12,5	16	115	65	45	48	283,10	12500
13,0	16	115	65	45	48	283,10	13000

WTX – High Performance Drill, DIN 6537

≤ 5xD

NOF = 2

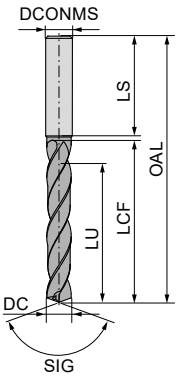

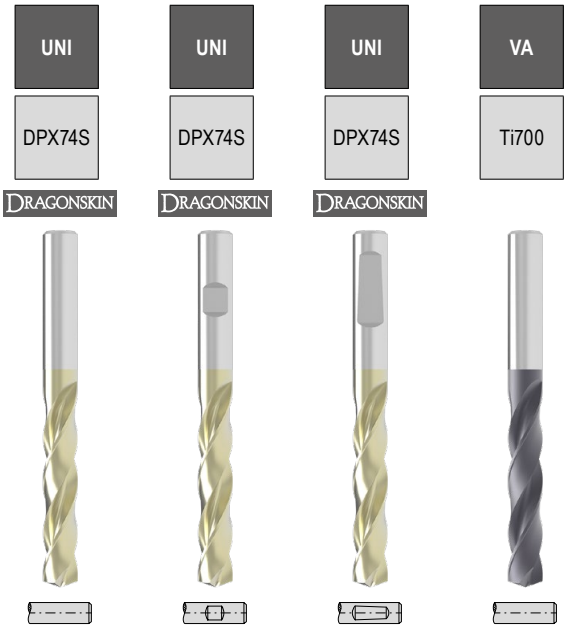

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 783 ... EUR T7		11 784 ... EUR T7		11 782 ... EUR T7		10 740 ... EUR T4	
3,00	6	66	28	23	36	62,28	03000	62,28	03000	62,28	03000	64,32	030
3,10	6	66	28	23	36	62,28	03100	62,28	03100	62,28	03100	64,32	031
3,15	6	66	28	23	36	62,28	03150	62,28	03150	62,28	03150		
3,20	6	66	28	23	36	62,28	03200	62,28	03200	62,28	03200	64,32	032
3,22	6	66	28	23	36	62,28	03220	62,28	03220	62,28	03220		
3,25	6	66	28	23	36	62,28	03250	62,28	03250	62,28	03250		
3,30	6	66	28	23	36	62,28	03300	62,28	03300	62,28	03300	64,32	033
3,40	6	66	28	23	36	62,28	03400	62,28	03400	62,28	03400	64,32	034
3,50	6	66	28	23	36	62,28	03500	62,28	03500	62,28	03500	64,32	035
3,60	6	66	28	23	36	62,28	03600	62,28	03600	62,28	03600	64,32	036
3,70	6	66	28	23	36	62,28	03700	62,28	03700	62,28	03700	64,32	037
3,80	6	74	36	29	36	62,28	03800	62,28	03800	62,28	03800	64,32	038
3,85	6	74	36	29	36	62,28	03850	62,28	03850	62,28	03850		
3,90	6	74	36	29	36	62,28	03900	62,28	03900	62,28	03900	64,32	039
4,00	6	74	36	29	36	62,28	04000	62,28	04000	62,28	04000	64,32	040
4,10	6	74	36	29	36	62,28	04100	62,28	04100	62,28	04100	64,32	041
4,20	6	74	36	29	36	62,28	04200	62,28	04200	62,28	04200	64,32	042
4,25	6	74	36	29	36	62,28	04250	62,28	04250	62,28	04250		
4,30	6	74	36	29	36	62,28	04300	62,28	04300	62,28	04300	64,32	043
4,35	6	74	36	29	36	62,28	04350	62,28	04350	62,28	04350		
4,40	6	74	36	29	36	62,28	04400	62,28	04400	62,28	04400	64,32	044
4,45	6	74	36	29	36	62,28	04450	62,28	04450	62,28	04450		
4,50	6	74	36	29	36	62,28	04500	62,28	04500	62,28	04500	64,32	045
4,60	6	74	36	29	36	62,28	04600	62,28	04600	62,28	04600	64,32	046
4,65	6	74	36	29	36	62,28	04650	62,28	04650	62,28	04650		
4,70	6	74	36	29	36	62,28	04700	62,28	04700	62,28	04700	64,32	047
4,80	6	82	44	35	36	62,28	04800	62,28	04800	62,28	04800	64,32	048
4,90	6	82	44	35	36	62,28	04900	62,28	04900	62,28	04900	64,32	049
4,95	6	82	44	35	36	62,28	04950	62,28	04950	62,28	04950		
5,00	6	82	44	35	36	62,28	05000	62,28	05000	62,28	05000	64,32	050
5,05	6	82	44	35	36	62,28	05050	62,28	05050	62,28	05050		
5,10	6	82	44	35	36	62,28	05100	62,28	05100	62,28	05100	64,32	051
5,20	6	82	44	35	36	62,28	05200	62,28	05200	62,28	05200	64,32	052
5,30	6	82	44	35	36	62,28	05300	62,28	05300	62,28	05300	64,32	053
5,40	6	82	44	35	36	62,28	05400	62,28	05400	62,28	05400	64,32	054
5,50	6	82	44	35	36	62,28	05500	62,28	05500	62,28	05500	64,32	055
5,55	6	82	44	35	36	62,28	05550	62,28	05550	62,28	05550		
5,60	6	82	44	35	36	62,28	05600	62,28	05600	62,28	05600	64,32	056
5,70	6	82	44	35	36	62,28	05700	62,28	05700	62,28	05700	64,32	057
5,75	6	82	44	35	36	62,28	05750	62,28	05750	62,28	05750		
5,80	6	82	44	35	36	62,28	05800	62,28	05800	62,28	05800	64,32	058
5,90	6	82	44	35	36	62,28	05900	62,28	05900	62,28	05900	64,32	059

P	●	●	●	○
M				●
K	●	●	●	○
N				○
S				●
H	○	○	○	
O				

→ v_c Page 111+112

Continued on next page

WTX – High Performance Drill, DIN 6537

≤ 5xD

NOF = 2

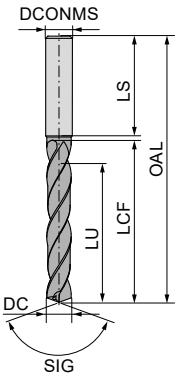

UNI	UNI	UNI	VA
DPX74S	DPX74S	DPX74S	Ti700
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 783 ... EUR T7		11 784 ... EUR T7		11 782 ... EUR T7		10 740 ... EUR T4	
5,95	6	82	44	35	36	62,28	05950	62,28	05950	62,28	05950		
6,00	6	82	44	35	36	62,28	06000	62,28	06000	62,28	06000	64,32	060
6,10	8	91	53	43	36	66,35	06100	66,35	06100	66,35	06100	77,33	061
6,20	8	91	53	43	36	66,35	06200	66,35	06200	66,35	06200	77,33	062
6,30	8	91	53	43	36	66,35	06300	66,35	06300	66,35	06300	77,33	063
6,40	8	91	53	43	36	66,35	06400	66,35	06400	66,35	06400	77,33	064
6,50	8	91	53	43	36	66,35	06500	66,35	06500	66,35	06500	77,33	065
6,60	8	91	53	43	36	66,35	06600	66,35	06600	66,35	06600	77,33	066
6,70	8	91	53	43	36	66,35	06700	66,35	06700	66,35	06700	77,33	067
6,80	8	91	53	43	36	66,35	06800	66,35	06800	66,35	06800	77,33	068
6,90	8	91	53	43	36	66,35	06900	66,35	06900	66,35	06900	77,33	069
7,00	8	91	53	43	36	66,35	07000	66,35	07000	66,35	07000	77,33	070
7,10	8	91	53	43	36	66,35	07100	66,35	07100	66,35	07100	77,33	071
7,20	8	91	53	43	36	66,35	07200	66,35	07200	66,35	07200	77,33	072
7,30	8	91	53	43	36	66,35	07300	66,35	07300	66,35	07300	77,33	073
7,40	8	91	53	43	36	66,35	07400	66,35	07400	66,35	07400	77,33	074
7,45	8	91	53	43	36	66,35	07450	66,35	07450	66,35	07450		
7,50	8	91	53	43	36	66,35	07500	66,35	07500	66,35	07500	77,33	075
7,60	8	91	53	43	36	66,35	07600	66,35	07600	66,35	07600	77,33	076
7,70	8	91	53	43	36	66,35	07700	66,35	07700	66,35	07700	77,33	077
7,80	8	91	53	43	36	66,35	07800	66,35	07800	66,35	07800	77,33	078
7,90	8	91	53	43	36	66,35	07900	66,35	07900	66,35	07900	77,33	079
8,00	8	91	53	43	36	66,35	08000	66,35	08000	66,35	08000	77,33	080
8,10	10	103	61	49	40	73,15	08100	73,15	08100	73,15	08100	92,72	081
8,20	10	103	61	49	40	73,15	08200	73,15	08200	73,15	08200	92,72	082
8,30	10	103	61	49	40	73,15	08300	73,15	08300	73,15	08300	92,72	083
8,40	10	103	61	49	40	73,15	08400	73,15	08400	73,15	08400	92,72	084
8,50	10	103	61	49	40	73,15	08500	73,15	08500	73,15	08500	92,72	085
8,60	10	103	61	49	40	73,15	08600	73,15	08600	73,15	08600	92,72	086
8,70	10	103	61	49	40	73,15	08700	73,15	08700	73,15	08700	92,72	087
8,80	10	103	61	49	40	73,15	08800	73,15	08800	73,15	08800	92,72	088
8,90	10	103	61	49	40	73,15	08900	73,15	08900	73,15	08900	92,72	089
9,00	10	103	61	49	40	73,15	09000	73,15	09000	73,15	09000	92,72	090
9,10	10	103	61	49	40	73,15	09100	73,15	09100	73,15	09100	92,72	091
9,20	10	103	61	49	40	73,15	09200	73,15	09200	73,15	09200	92,72	092
9,30	10	103	61	49	40	73,15	09300	73,15	09300	73,15	09300	92,72	093
9,35	10	103	61	49	40	73,15	09350	73,15	09350	73,15	09350		
9,40	10	103	61	49	40	73,15	09400	73,15	09400	73,15	09400	92,72	094
9,45	10	103	61	49	40	73,15	09450	73,15	09450	73,15	09450		
9,50	10	103	61	49	40	73,15	09500	73,15	09500	73,15	09500	92,72	095
9,60	10	103	61	49	40	73,15	09600	73,15	09600	73,15	09600	92,72	096
9,70	10	103	61	49	40	73,15	09700	73,15	09700	73,15	09700	92,72	097

P	●	●	●	○
M				●
K	●	●	●	○
N				○
S				●
H	○	○	○	
O				

→ v_c Page 111+112

Continued on next page

WTX – High Performance Drill, DIN 6537

≤ 5xD

NOF = 2

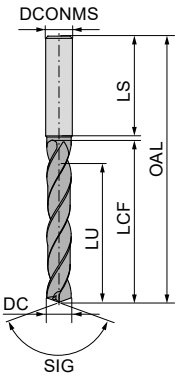

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 783 ... EUR T7		11 784 ... EUR T7		11 782 ... EUR T7		10 740 ... EUR T4	
9,80	10	103	61	49	40	73,15	09800	73,15	09800	73,15	09800	92,72	098
9,90	10	103	61	49	40	73,15	09900	73,15	09900	73,15	09900	92,72	099
10,00	10	103	61	49	40	73,15	10000	73,15	10000	73,15	10000	92,72	100
10,10	12	118	71	56	45	106,60	10100	106,60	10100	106,60	10100	133,30	101
10,20	12	118	71	56	45	106,60	10200	106,60	10200	106,60	10200	133,30	102
10,30	12	118	71	56	45	106,60	10300	106,60	10300	106,60	10300	133,30	103
10,40	12	118	71	56	45	106,60	10400	106,60	10400	106,60	10400	133,30	104
10,50	12	118	71	56	45	106,60	10500	106,60	10500	106,60	10500	133,30	105
10,55	12	118	71	56	45	106,60	10550	106,60	10550	106,60	10550		
10,60	12	118	71	56	45	106,60	10600	106,60	10600	106,60	10600	133,30	106
10,70	12	118	71	56	45	106,60	10700	106,60	10700	106,60	10700	133,30	107
10,75	12	118	71	56	45	106,60	10750	106,60	10750	106,60	10750		
10,80	12	118	71	56	45	106,60	10800	106,60	10800	106,60	10800	133,30	108
10,90	12	118	71	56	45	106,60	10900	106,60	10900	106,60	10900	133,30	109
11,00	12	118	71	56	45	106,60	11000	106,60	11000	106,60	11000	133,30	110
11,10	12	118	71	56	45	106,60	11100	106,60	11100	106,60	11100	133,30	111
11,20	12	118	71	56	45	106,60	11200	106,60	11200	106,60	11200	133,30	112
11,25	12	118	71	56	45	106,60	11250	106,60	11250	106,60	11250		
11,30	12	118	71	56	45	106,60	11300	106,60	11300	106,60	11300	133,30	113
11,35	12	118	71	56	45	106,60	11350	106,60	11350	106,60	11350		
11,40	12	118	71	56	45	106,60	11400	106,60	11400	106,60	11400	133,30	114
11,45	12	118	71	56	45	106,60	11450	106,60	11450	106,60	11450		
11,50	12	118	71	56	45	106,60	11500	106,60	11500	106,60	11500	133,30	115
11,60	12	118	71	56	45	106,60	11600	106,60	11600	106,60	11600	133,30	116
11,70	12	118	71	56	45	106,60	11700	106,60	11700	106,60	11700	133,30	117
11,80	12	118	71	56	45	106,60	11800	106,60	11800	106,60	11800	133,30	118
11,90	12	118	71	56	45	106,60	11900	106,60	11900	106,60	11900	133,30	119
12,00	12	118	71	56	45	106,60	12000	106,60	12000	106,60	12000	133,30	120
12,15	14	124	77	60	45	140,30	12150	140,30	12150	140,30	12150		
12,25	14	124	77	60	45	140,30	12250	140,30	12250	140,30	12250		
12,50	14	124	77	60	45	140,30	12500	140,30	12500	140,30	12500	173,90	125
12,55	14	124	77	60	45	140,30	12550	140,30	12550	140,30	12550		
12,70	14	124	77	60	45	140,30	12700	140,30	12700	140,30	12700		
12,80	14	124	77	60	45	140,30	12800	140,30	12800	140,30	12800	173,90	128
12,90	14	124	77	60	45	140,30	12900	140,30	12900	140,30	12900		
13,00	14	124	77	60	45	140,30	13000	140,30	13000	140,30	13000	173,90	130
13,10	14	124	77	60	45	140,30	13100	140,30	13100	140,30	13100		
13,30	14	124	77	60	45	140,30	13300	140,30	13300	140,30	13300		
13,35	14	124	77	60	45	140,30	13350	140,30	13350	140,30	13350		
13,50	14	124	77	60	45	140,30	13500	140,30	13500	140,30	13500	173,90	135
13,70	14	124	77	60	45	140,30	13700	140,30	13700	140,30	13700		
13,80	14	124	77	60	45	140,30	13800	140,30	13800	140,30	13800	173,90	138

P	●	●	●	○
M				●
K	●	●	●	○
N				○
S				●
H	○	○	○	
O				

→ v_c Page 111+112

Continued on next page

WTX – High Performance Drill, DIN 6537

≤ 5xD

NOF = 2

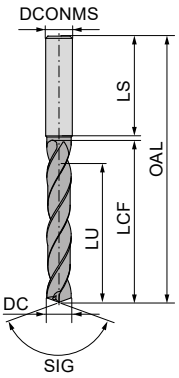

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 783 ... EUR T7		11 784 ... EUR T7		11 782 ... EUR T7		10 740 ... EUR T4	
14,00	14	124	77	60	45	140,30	14000	140,30	14000	140,30	14000	173,90	140
14,20	16	133	83	63	48	176,70	14200	176,70	14200	176,70	14200		
14,50	16	133	83	63	48	176,70	14500	176,70	14500	176,70	14500	242,00	145
14,80	16	133	83	63	48	176,70	14800	176,70	14800	176,70	14800	242,00	148
15,00	16	133	83	63	48	176,70	15000	176,70	15000	176,70	15000	242,00	150
15,10	16	133	83	63	48	176,70	15100	176,70	15100	176,70	15100		
15,25	16	133	83	63	48	176,70	15250	176,70	15250	176,70	15250		
15,30	16	133	83	63	48	176,70	15300	176,70	15300	176,70	15300		
15,35	16	133	83	63	48	176,70	15350	176,70	15350	176,70	15350		
15,50	16	133	83	63	48	176,70	15500	176,70	15500	176,70	15500	242,00	155
15,60	16	133	83	63	48	176,70	15600	176,70	15600	176,70	15600		
15,80	16	133	83	63	48	176,70	15800	176,70	15800	176,70	15800	242,00	158
16,00	16	133	83	63	48	176,70	16000	176,70	16000	176,70	16000	242,00	160
16,05	18	143	93	71	48	265,30	16050	265,30	16050	265,30	16050		
16,50	18	143	93	71	48	265,30	16500	265,30	16500	265,30	16500	349,10	165
16,80	18	143	93	71	48	265,30	16800	265,30	16800	265,30	16800	349,10	168
16,90	18	143	93	71	48	265,30	16900	265,30	16900	265,30	16900		
17,00	18	143	93	71	48	265,30	17000	265,30	17000	265,30	17000	349,10	170
17,50	18	143	93	71	48	265,30	17500	265,30	17500	265,30	17500	349,10	175
17,60	18	143	93	71	48	265,30	17600	265,30	17600	265,30	17600		
17,80	18	143	93	71	48	265,30	17800	265,30	17800	265,30	17800	349,10	178
18,00	18	143	93	71	48	265,30	18000	265,30	18000	265,30	18000	349,10	180
18,50	20	153	101	77	50	339,00	18500	339,00	18500	339,00	18500	430,20	185
18,80	20	153	101	77	50	339,00	18800	339,00	18800	339,00	18800	430,20	188
18,90	20	153	101	77	50	339,00	18900	339,00	18900	339,00	18900		
19,00	20	153	101	77	50	339,00	19000	339,00	19000	339,00	19000	430,20	190
19,35	20	153	101	77	50	339,00	19350	339,00	19350	339,00	19350		
19,50	20	153	101	77	50	339,00	19500	339,00	19500	339,00	19500	430,20	195
19,60	20	153	101	77	50	339,00	19600	339,00	19600	339,00	19600		
19,80	20	153	101	77	50	339,00	19800	339,00	19800	339,00	19800	430,20	198
20,00	20	153	101	77	50	339,00	20000	339,00	20000	339,00	20000	430,20	200
P						●		●		●		○	
M												●	
K						●		●		●		○	
N												○	
S												●	
H						○		○		○			
O													

→ v_c Page 111+112

High Performance Drill, DIN 6537

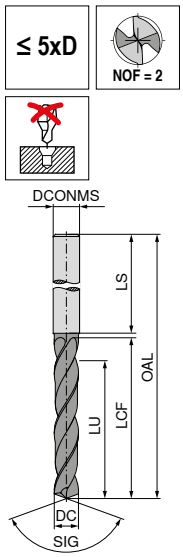

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 710 ... EUR T1/9C		11 709 ... EUR T1/9C	
3,00	6	66	28	23,5	36	35,66	03000	35,66	03000
3,10	6	66	28	23,3	36	35,66	03100	35,66	03100
3,20	6	66	28	23,2	36	35,66	03200	35,66	03200
3,25	6	66	28	23,1	36	35,66	03250	35,66	03250
3,30	6	66	28	23,0	36	35,66	03300	35,66	03300
3,40	6	66	28	22,9	36	35,66	03400	35,66	03400
3,50	6	66	28	22,7	36	35,66	03500	35,66	03500
3,60	6	66	28	22,6	36	35,66	03600	35,66	03600
3,70	6	66	28	22,4	36	35,66	03700	35,66	03700
3,80	6	74	36	30,3	36	35,66	03800	35,66	03800
3,90	6	74	36	30,1	36	35,66	03900	35,66	03900
4,00	6	74	36	30,0	36	35,66	04000	35,66	04000
4,10	6	74	36	29,8	36	35,66	04100	35,66	04100
4,20	6	74	36	29,7	36	35,66	04200	35,66	04200
4,30	6	74	36	29,5	36	35,66	04300	35,66	04300
4,40	6	74	36	29,4	36	35,66	04400	35,66	04400
4,50	6	74	36	29,2	36	35,66	04500	35,66	04500
4,60	6	74	36	29,1	36	35,66	04600	35,66	04600
4,65	6	74	36	29,0	36	35,66	04650	35,66	04650
4,70	6	74	36	28,9	36	35,66	04700	35,66	04700
4,80	6	82	44	36,8	36	35,66	04800	35,66	04800
4,90	6	82	44	36,6	36	35,66	04900	35,66	04900
5,00	6	82	44	36,5	36	35,66	05000	35,66	05000
5,10	6	82	44	36,3	36	35,66	05100	35,66	05100
5,20	6	82	44	36,2	36	35,66	05200	35,66	05200
5,30	6	82	44	36,0	36	35,66	05300	35,66	05300
5,40	6	82	44	35,9	36	35,66	05400	35,66	05400
5,50	6	82	44	35,7	36	35,66	05500	35,66	05500
5,55	6	82	44	35,6	36	35,66	05550	35,66	05550
5,60	6	82	44	35,6	36	35,66	05600	35,66	05600
5,65	6	82	44	35,5	36	35,66	05650	35,66	05650
5,70	6	82	44	35,4	36	35,66	05700	35,66	05700
5,80	6	82	44	35,3	36	35,66	05800	35,66	05800
5,90	6	82	44	35,1	36	35,66	05900	35,66	05900
6,00	6	82	44	35,0	36	35,66	06000	35,66	06000
6,10	8	91	53	43,8	36	36,24	06100	36,24	06100
6,20	8	91	53	43,7	36	36,24	06200	36,24	06200
6,30	8	91	53	43,5	36	36,24	06300	36,24	06300
6,40	8	91	53	43,4	36	36,24	06400	36,24	06400
6,50	8	91	53	43,2	36	36,24	06500	36,24	06500
6,60	8	91	53	43,1	36	36,24	06600	36,24	06600
6,70	8	91	53	42,9	36	36,24	06700	36,24	06700
6,80	8	91	53	42,8	36	36,24	06800	36,24	06800
6,90	8	91	53	42,6	36	36,24	06900	36,24	06900
7,00	8	91	53	42,5	36	36,24	07000	36,24	07000
7,10	8	91	53	42,3	36	36,24	07100	36,24	07100
7,20	8	91	53	42,2	36	36,24	07200	36,24	07200
7,30	8	91	53	42,0	36	36,24	07300	36,24	07300
7,40	8	91	53	41,9	36	36,24	07400	36,24	07400
7,50	8	91	53	41,7	36	36,24	07500	36,24	07500
7,55	8	91	53	41,6	36	36,24	07550	36,24	07550
7,60	8	91	53	41,6	36	36,24	07600	36,24	07600
7,65	8	91	53	41,5	36	36,24	07650	36,24	07650
7,70	8	91	53	41,4	36	36,24	07700	36,24	07700
7,80	8	91	53	41,3	36	36,24	07800	36,24	07800
7,90	8	91	53	41,1	36	36,24	07900	36,24	07900
8,00	8	91	53	41,0	36	36,24	08000	36,24	08000
8,10	10	103	61	48,8	40	39,93	08100	39,93	08100
8,20	10	103	61	48,7	40	39,93	08200	39,93	08200
8,30	10	103	61	48,5	40	39,93	08300	39,93	08300
8,40	10	103	61	48,4	40	39,93	08400	39,93	08400
8,50	10	103	61	48,2	40	39,93	08500	39,93	08500
8,60	10	103	61	48,1	40	39,93	08600	39,93	08600
8,70	10	103	61	47,9	40	39,93	08700	39,93	08700
8,80	10	103	61	47,8	40	39,93	08800	39,93	08800
8,90	10	103	61	47,6	40	39,93	08900	39,93	08900
9,00	10	103	61	47,5	40	39,93	09000	39,93	09000
9,10	10	103	61	47,3	40	39,93	09100	39,93	09100
9,20	10	103	61	47,2	40	39,93	09200	39,93	09200
9,30	10	103	61	47,0	40	39,93	09300	39,93	09300
9,40	10	103	61	46,9	40	39,93	09400	39,93	09400
9,50	10	103	61	46,7	40	39,93	09500	39,93	09500
9,60	10	103	61	46,6	40	39,93	09600	39,93	09600
9,70	10	103	61	46,4	40	39,93	09700	39,93	09700
9,80	10	103	61	46,3	40	39,93	09800	39,93	09800
9,90	10	103	61	46,1	40	39,93	09900	39,93	09900
10,00	10	103	61	46,0	40	39,93	10000	39,93	10000
10,10	12	118	71	55,8	45	59,67	10100	59,67	10100
10,20	12	118	71	55,7	45	59,67	10200	59,67	10200
10,30	12	118	71	55,5	45	59,67	10300	59,67	10300
10,40	12	118	71	55,4	45	59,67	10400	59,67	10400
10,50	12	118	71	55,2	45	59,67	10500	59,67	10500
10,60	12	118	71	55,1	45	59,67	10600	59,67	10600
10,70	12	118	71	54,9	45	59,67	10700	59,67	10700
10,80	12	118	71	54,8	45	59,67	10800	59,67	10800
10,90	12	118	71	54,6	45	59,67	10900	59,67	10900
11,00	12	118	71	54,5	45	59,67	11000	59,67	11000
11,10	12	118	71	54,3	45	59,67	11100	59,67	11100
11,20	12	118	71	54,2	45	59,67	11200	59,67	11200
11,30	12	118	71	54,0	45	59,67	11300	59,67	11300
11,40	12	118	71	53,9	45	59,67	11400	59,67	11400
11,50	12	118	71	53,7	45	59,67	11500	59,67	11500
11,60	12	118	71	53,6	45	59,67	11600	59,67	11600
11,70	12	118	71	53,4	45	59,67	11700	59,67	11700
11,80	12	118	71	53,3	45	59,67	11800	59,67	11800
11,90	12	118	71	53,1	45	59,67	11900	59,67	11900
12,00	12	118	71	53,0	45	59,67	12000	59,67	12000
12,10	14	124	77	58,8	45	78,31	12100	78,31	12100
12,20	14	124	77	58,7	45	78,31	12200	78,31	12200
12,50	14	124	77	58,2	45	78,31	12500	78,31	12500
12,70	14	124	77	57,9	45	78,31	12700	78,31	12700
12,80	14	124	77	57,8	45	78,31	12800	78,31	12800
13,00	14	124	77	57,5	45	78,31	13000	78,31	13000
13,20	14	124	77	57,2	45	78,31	13200	78,31	13200
13,50	14	124	77	56,7	45	78,31	13500	78,31	13500
13,80	14	124	77	56,3	45	78,31	13800	78,31	13800
14,00	14	124	77	56,0	45	78,31	14000	78,31	14000
14,20	16	133	83	61,7	48	101,90	14200	101,90	14200
14,40	16	133	83	61,4	48	101,90	14400	101,90	14400
14,50	16	133	83	61,2	48	101,90	14500	101,90	14500
14,80	16	133	83	60,8	48	101,90	14800	101,90	14800
15,00	16	133	83	60,5	48	101,90	15000	101,90	15000
15,20	16	133	83	60,2	48	101,90	15200	101,90	15200
15,50	16	133	83	59,7	48	101,90	15500	101,90	15500
15,80	16	133	83	59,3	48	101,90	15800	101,90	15800
16,00	16	133	83	59,0	48	101,90	16000	101,90	16000
16,50	18	143	93	68,2	48	164,80	16500	164,80	16500
17,00	18	143	93	67,5	48	164,80	17000	164,80	17000
17,50	18	143	93	66,7	48	164,80	17500	164,80	17500
18,00	18	143	93	66,0	48	164,80	18000	164,80	18000
18,50	20	153	101	73,2	50	177,70	18500	177,70	18500
18,90	20	153	101	72,6	50	177,70	18900	177,70	18900
19,00	20	153	101	72,5	50	177,70	19000	177,70	19000
19,50	20	153	101	71,7	50	177,70	19500	177,70	19500
20,00	20	153	101	71,0	50	177,70	20000	177,70	20000

P	●	●
M		
K	●	●
N		
S		
H		
O		

→ v_c Page 128

Twist drill similar to DIN 338

▲ Helix angle 30°
▲ Shank Ø h7

2

≤ 5xD

NOF = 2



N

SIG 118°
Solid carbide

DC h7 mm	OAL mm	LCF mm	10 710 ... EUR T3	
0,5	22	6	7,60	005
0,6	24	7	7,60	006
0,7	28	9	7,60	007
0,8	30	10	7,60	008
0,9	32	11	7,60	009
1,0	34	12	7,60	010
1,1	36	14	8,72	011
1,2	38	16	8,72	012
1,3	38	16	8,72	013
1,4	40	18	8,72	014
1,5	40	18	8,72	015
1,6	43	20	8,72	016
1,7	43	20	8,72	017
1,8	46	22	8,72	018
1,9	46	22	8,72	019
2,0	49	24	8,72	020
2,1	49	24	9,98	021
2,2	53	27	12,92	022
2,3	53	27	12,92	023
2,4	57	30	12,92	024
2,5	57	30	12,68	025
2,6	57	30	14,30	026
2,7	61	33	16,96	027
2,8	61	33	18,11	028
2,9	61	33	18,11	029
3,0	61	33	16,36	030
3,1	65	36	16,51	031
3,2	65	36	16,51	032
3,3	65	36	16,67	033
3,4	70	39	18,54	034
3,5	70	39	18,24	035
3,6	70	39	19,55	036
3,7	70	39	19,55	037
3,8	75	43	20,57	038
3,9	75	43	20,57	039
4,0	75	43	20,43	040
4,1	75	43	18,84	041
4,2	75	43	18,84	042
4,3	80	47	27,96	043
4,4	80	47	27,96	044
4,5	80	47	25,49	045
4,6	80	47	28,97	046
4,7	80	47	28,97	047
4,8	86	52	29,98	048
4,9	86	52	29,98	049
5,0	86	52	27,80	050
5,1	86	52	33,46	051
5,2	86	52	33,46	052
5,3	86	52	38,09	053
5,4	93	57	38,09	054
5,5	93	57	36,51	055
5,6	93	57	39,97	056
5,7	93	57	39,97	057
5,8	93	57	39,97	058
5,9	93	57	39,97	059
6,0	93	57	38,83	060
6,1	101	63	49,68	061
6,2	101	63	49,68	062
6,3	101	63	49,68	063
6,4	101	63	49,68	064
6,5	101	63	48,09	065
6,6	109	69	58,08	066
6,8	109	69	58,08	068
7,0	109	69	57,51	070
7,5	109	69	61,14	075
7,8	117	75	68,23	078
8,0	117	75	68,23	080
8,5	117	75	80,10	085
8,8	125	81	85,74	088
9,0	125	81	85,74	090
9,5	125	81	95,04	095
9,8	133	87	100,20	098
10,0	133	87	100,20	100
10,2	133	87	122,10	102
10,5	133	87	122,10	105
11,0	142	94	152,20	110
11,5	142	94	162,40	115
12,0	151	101	173,90	120
13,0	151	101	224,70	130
14,0	160	108	242,00	140
16,0	178	120	328,80	160

	10 710 ...
P	○
M	
K	●
N	●
S	○
H	
O	

→ v_c Page 134

WTX – High Performance Drill, DIN 6537



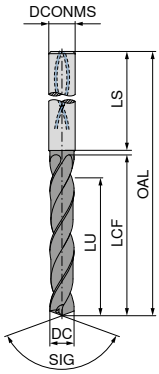

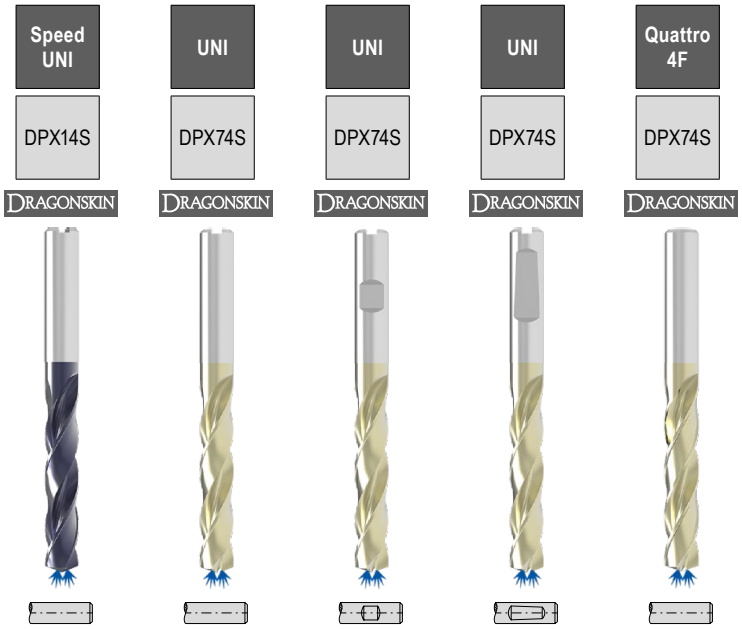

						SIG 145° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
						10 771 ...		11 786 ...		11 787 ...		11 785 ...		10 735 ...	
DC $_{m7/h7}$	DCONMS $_{h6}$	OAL	LCF	LU	LS	EUR		EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	T4		T7		T7		T7		T4	
3,00	6	66	28	23	36	110,80	03000	92,40	03000	92,40	03000	92,40	03000	109,40	03000
3,10	6	66	28	23	36	110,80	03100	92,40	03100	92,40	03100	92,40	03100	109,40	03100
3,15	6	66	28	23	36			92,40	03150	92,40	03150	92,40	03150		
3,20	6	66	28	23	36	110,80	03200	92,40	03200	92,40	03200	92,40	03200	109,40	03200
3,22	6	66	28	23	36			92,40	03220	92,40	03220	92,40	03220		
3,25	6	66	28	23	36			92,40	03250	92,40	03250	92,40	03250		
3,30	6	66	28	23	36	110,80	03300	92,40	03300	92,40	03300	92,40	03300	109,40	03300
3,40	6	66	28	23	36	110,80	03400	92,40	03400	92,40	03400	92,40	03400	109,40	03400
3,50	6	66	28	23	36	110,80	03500	92,40	03500	92,40	03500	92,40	03500	109,40	03500
3,60	6	66	28	23	36	110,80	03600	92,40	03600	92,40	03600	92,40	03600	109,40	03600
3,70	6	66	28	23	36	110,80	03700	92,40	03700	92,40	03700	92,40	03700	109,40	03700
3,80	6	74	36	29	36	110,80	03800	92,40	03800	92,40	03800	92,40	03800	109,40	03800
3,85	6	74	36	29	36			92,40	03850	92,40	03850	92,40	03850		
3,90	6	74	36	29	36	110,80	03900	92,40	03900	92,40	03900	92,40	03900	109,40	03900
4,00	6	74	36	29	36	110,80	04000	92,40	04000	92,40	04000	92,40	04000	109,40	04000
4,10	6	74	36	29	36	110,80	04100	92,40	04100	92,40	04100	92,40	04100	109,40	04100
4,20	6	74	36	29	36	110,80	04200	92,40	04200	92,40	04200	92,40	04200	109,40	04200
4,25	6	74	36	29	36			92,40	04250	92,40	04250	92,40	04250		
4,30	6	74	36	29	36	110,80	04300	92,40	04300	92,40	04300	92,40	04300	109,40	04300
4,35	6	74	36	29	36			92,40	04350	92,40	04350	92,40	04350		
4,40	6	74	36	29	36	110,80	04400	92,40	04400	92,40	04400	92,40	04400	109,40	04400
4,45	6	74	36	29	36			92,40	04450	92,40	04450	92,40	04450		
4,50	6	74	36	29	36	110,80	04500	92,40	04500	92,40	04500	92,40	04500	109,40	04500
4,60	6	74	36	29	36	110,80	04600	92,40	04600	92,40	04600	92,40	04600	109,40	04600
4,65	6	74	36	29	36	110,80	04650	92,40	04650	92,40	04650	92,40	04650		
4,70	6	74	36	29	36	110,80	04700	92,40	04700	92,40	04700	92,40	04700	109,40	04700
4,80	6	82	44	35	36	110,80	04800	92,40	04800	92,40	04800	92,40	04800	109,40	04800
4,90	6	82	44	35	36	110,80	04900	92,40	04900	92,40	04900	92,40	04900	109,40	04900
4,95	6	82	44	35	36			92,40	04950	92,40	04950	92,40	04950		
5,00	6	82	44	35	36	110,80	05000	92,40	05000	92,40	05000	92,40	05000	109,40	05000
5,05	6	82	44	35	36			92,40	05050	92,40	05050	92,40	05050		
5,10	6	82	44	35	36	110,80	05100	92,40	05100	92,40	05100	92,40	05100	109,40	05100
5,20	6	82	44	35	36	110,80	05200	92,40	05200	92,40	05200	92,40	05200	109,40	05200
5,30	6	82	44	35	36	110,80	05300	92,40	05300	92,40	05300	92,40	05300	109,40	05300
P						●		●		●		●		●	
M						●									
K						●		●		●		●		●	
N															
S															
H								○		○		○		○	
O															

→ v_c Page 111–120

Ø DC_{m7} for Type UNI and Quattro 4F/ **Ø DC_{h7}** for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



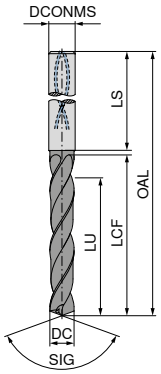

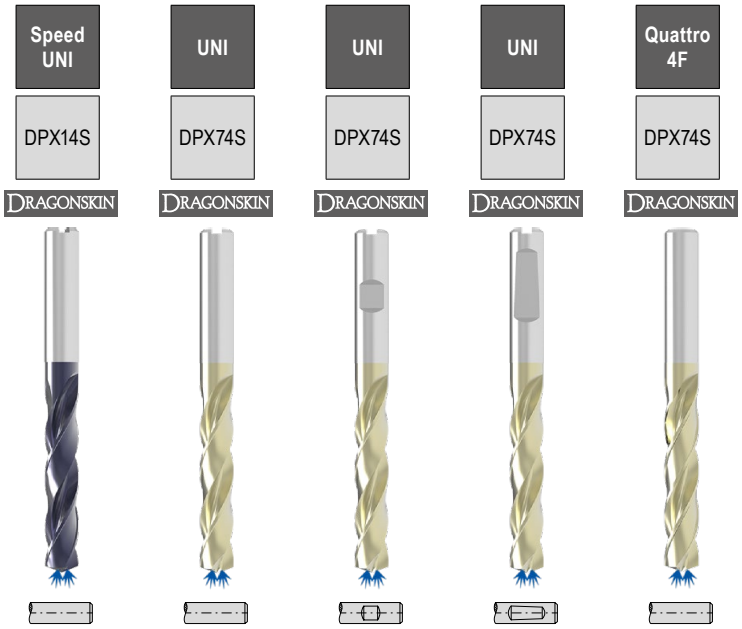

						SIG 145° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide					
						10 771 ...		11 786 ...		11 787 ...		11 785 ...		10 735 ...					
DC m7/h7	DCONMS h6	OAL	LCF	LU	LS	EUR		EUR		EUR		EUR		EUR					
mm	mm	mm	mm	mm	mm	T4		T7		T7		T7		T4					
5,40	6	82	44	35	36	110,80	05400	92,40	05400	92,40	05400	92,40	05400	109,40	05400				
5,50	6	82	44	35	36	110,80	05500	92,40	05500	92,40	05500	92,40	05500	109,40	05500				
5,55	6	82	44	35	36	110,80	05550	92,40	05550	92,40	05550	92,40	05550						
5,60	6	82	44	35	36	110,80	05600	92,40	05600	92,40	05600	92,40	05600	109,40	05600				
5,70	6	82	44	35	36	110,80	05700	92,40	05700	92,40	05700	92,40	05700	109,40	05700				
5,75	6	82	44	35	36			92,40	05750	92,40	05750	92,40	05750						
5,80	6	82	44	35	36	110,80	05800	92,40	05800	92,40	05800	92,40	05800	109,40	05800				
5,90	6	82	44	35	36	110,80	05900	92,40	05900	92,40	05900	92,40	05900	109,40	05900				
5,95	6	82	44	35	36			92,40	05950	92,40	05950	92,40	05950						
6,00	6	82	44	35	36	110,80	06000	92,40	06000	92,40	06000	92,40	06000	109,40	06000				
6,10	8	91	53	43	36	125,00	06100	104,30	06100	104,30	06100	104,30	06100	123,40	06100				
6,20	8	91	53	43	36	125,00	06200	104,30	06200	104,30	06200	104,30	06200	123,40	06200				
6,30	8	91	53	43	36	125,00	06300	104,30	06300	104,30	06300	104,30	06300	123,40	06300				
6,40	8	91	53	43	36	125,00	06400	104,30	06400	104,30	06400	104,30	06400	123,40	06400				
6,50	8	91	53	43	36	125,00	06500	104,30	06500	104,30	06500	104,30	06500	123,40	06500				
6,60	8	91	53	43	36	125,00	06600	104,30	06600	104,30	06600	104,30	06600	123,40	06600				
6,70	8	91	53	43	36	125,00	06700	104,30	06700	104,30	06700	104,30	06700	123,40	06700				
6,80	8	91	53	43	36	125,00	06800	104,30	06800	104,30	06800	104,30	06800	123,40	06800				
6,90	8	91	53	43	36	125,00	06900	104,30	06900	104,30	06900	104,30	06900	123,40	06900				
7,00	8	91	53	43	36	125,00	07000	104,30	07000	104,30	07000	104,30	07000	123,40	07000				
7,10	8	91	53	43	36	125,00	07100	104,30	07100	104,30	07100	104,30	07100	123,40	07100				
7,20	8	91	53	43	36	125,00	07200	104,30	07200	104,30	07200	104,30	07200	123,40	07200				
7,30	8	91	53	43	36	125,00	07300	104,30	07300	104,30	07300	104,30	07300	123,40	07300				
7,40	8	91	53	43	36	125,00	07400	104,30	07400	104,30	07400	104,30	07400	123,40	07400				
7,45	8	91	53	43	36			104,30	07450	104,30	07450	104,30	07450						
7,50	8	91	53	43	36	125,00	07500	104,30	07500	104,30	07500	104,30	07500	123,40	07500				
7,60	8	91	53	43	36	125,00	07600	104,30	07600	104,30	07600	104,30	07600	123,40	07600				
7,70	8	91	53	43	36	125,00	07700	104,30	07700	104,30	07700	104,30	07700	123,40	07700				
7,80	8	91	53	43	36	125,00	07800	104,30	07800	104,30	07800	104,30	07800	123,40	07800				
7,90	8	91	53	43	36	125,00	07900	104,30	07900	104,30	07900	104,30	07900	123,40	07900				
8,00	8	91	53	43	36	125,00	08000	104,30	08000	104,30	08000	104,30	08000	123,40	08000				
8,10	10	103	61	49	40	150,60	08100	120,20	08100	120,20	08100	120,20	08100	176,70	08100				
8,20	10	103	61	49	40	150,60	08200	120,20	08200	120,20	08200	120,20	08200	176,70	08200				
8,30	10	103	61	49	40	150,60	08300	120,20	08300	120,20	08300	120,20	08300	176,70	08300				

P	●	●	●	●	●
M	●				
K	●	●	●	●	●
N					
S					
H		○	○	○	○
O					

→ v_c Page 111–120

Ø DC_{m7} for Type UNI and Quattro 4F/ Ø DC_{h7} for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



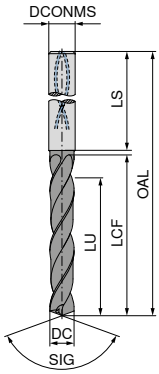

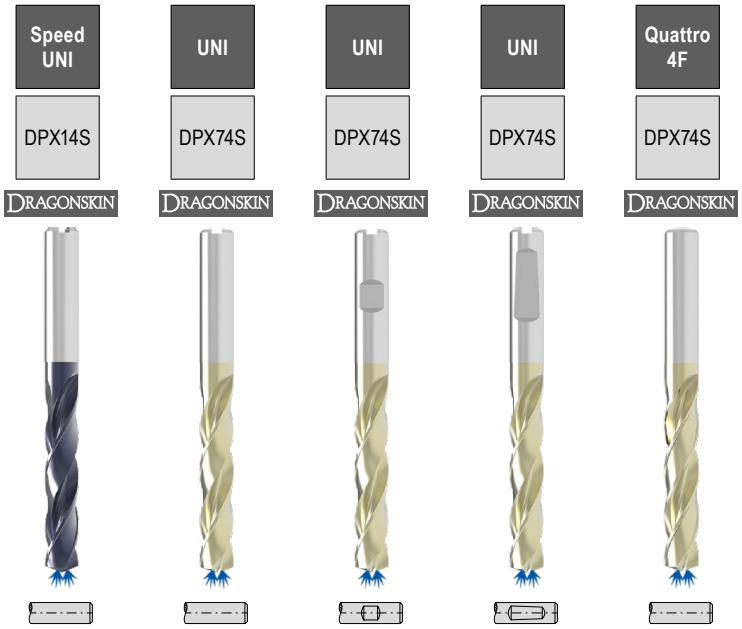

						SIG 145° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
						10 771 ...		11 786 ...		11 787 ...		11 785 ...		10 735 ...	
DC $_{m7/h7}$	DCONMS $_{h6}$	OAL	LCF	LU	LS	EUR		EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	T4		T7		T7		T7		T4	
8,40	10	103	61	49	40	150,60	08400	120,20	08400	120,20	08400	120,20	08400	176,70	08400
8,50	10	103	61	49	40	150,60	08500	120,20	08500	120,20	08500	120,20	08500	176,70	08500
8,60	10	103	61	49	40	150,60	08600	120,20	08600	120,20	08600	120,20	08600	176,70	08600
8,70	10	103	61	49	40	150,60	08700	120,20	08700	120,20	08700	120,20	08700	176,70	08700
8,80	10	103	61	49	40	150,60	08800	120,20	08800	120,20	08800	120,20	08800	176,70	08800
8,90	10	103	61	49	40	150,60	08900	120,20	08900	120,20	08900	120,20	08900	176,70	08900
9,00	10	103	61	49	40	150,60	09000	120,20	09000	120,20	09000	120,20	09000	176,70	09000
9,10	10	103	61	49	40	150,60	09100	120,20	09100	120,20	09100	120,20	09100	176,70	09100
9,20	10	103	61	49	40	150,60	09200	120,20	09200	120,20	09200	120,20	09200	176,70	09200
9,30	10	103	61	49	40	150,60	09300	120,20	09300	120,20	09300	120,20	09300	176,70	09300
9,35	10	103	61	49	40			120,20	09350	120,20	09350	120,20	09350		
9,40	10	103	61	49	40	150,60	09400	120,20	09400	120,20	09400	120,20	09400	176,70	09400
9,45	10	103	61	49	40			120,20	09450	120,20	09450	120,20	09450		
9,50	10	103	61	49	40	150,60	09500	120,20	09500	120,20	09500	120,20	09500	176,70	09500
9,60	10	103	61	49	40	150,60	09600	120,20	09600	120,20	09600	120,20	09600	176,70	09600
9,70	10	103	61	49	40	150,60	09700	120,20	09700	120,20	09700	120,20	09700	176,70	09700
9,80	10	103	61	49	40	150,60	09800	120,20	09800	120,20	09800	120,20	09800	176,70	09800
9,90	10	103	61	49	40	150,60	09900	120,20	09900	120,20	09900	120,20	09900	176,70	09900
10,00	10	103	61	49	40	150,60	10000	120,20	10000	120,20	10000	120,20	10000	176,70	10000
10,10	12	118	71	56	45	214,40	10100	170,90	10100	170,90	10100	170,90	10100	250,60	10100
10,20	12	118	71	56	45	214,40	10200	170,90	10200	170,90	10200	170,90	10200	250,60	10200
10,30	12	118	71	56	45	214,40	10300	170,90	10300	170,90	10300	170,90	10300	250,60	10300
10,40	12	118	71	56	45	214,40	10400	170,90	10400	170,90	10400	170,90	10400	250,60	10400
10,50	12	118	71	56	45	214,40	10500	170,90	10500	170,90	10500	170,90	10500	250,60	10500
10,55	12	118	71	56	45			170,90	10550	170,90	10550	170,90	10550		
10,60	12	118	71	56	45	214,40	10600	170,90	10600	170,90	10600	170,90	10600	250,60	10600
10,70	12	118	71	56	45	214,40	10700	170,90	10700	170,90	10700	170,90	10700	250,60	10700
10,75	12	118	71	56	45			170,90	10750	170,90	10750	170,90	10750		
10,80	12	118	71	56	45	214,40	10800	170,90	10800	170,90	10800	170,90	10800	250,60	10800
10,90	12	118	71	56	45	214,40	10900	170,90	10900	170,90	10900	170,90	10900	250,60	10900
11,00	12	118	71	56	45	214,40	11000	170,90	11000	170,90	11000	170,90	11000	250,60	11000
11,10	12	118	71	56	45	214,40	11100	170,90	11100	170,90	11100	170,90	11100	250,60	11100
11,20	12	118	71	56	45	214,40	11200	170,90	11200	170,90	11200	170,90	11200	250,60	11200
11,25	12	118	71	56	45			170,90	11250	170,90	11250	170,90	11250		
P						●		●		●		●		●	
M						●									
K						●		●		●		●		●	
N															
S															
H								○		○		○		○	
O															

→ v_c Page 111–120

Ø DC_{m7} for Type UNI and Quattro 4F/ **Ø DC_{h7}** for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



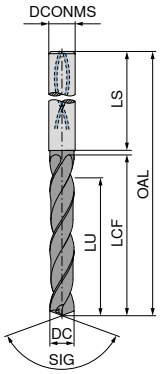

Speed UNI	UNI	UNI	UNI	Quattro 4F
DPX14S	DPX74S	DPX74S	DPX74S	DPX74S
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

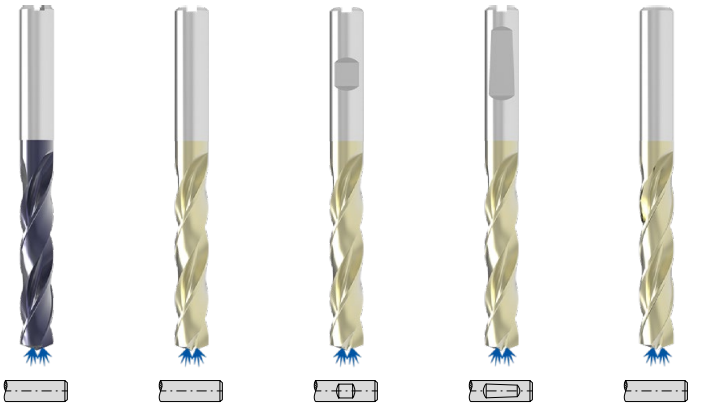

SIG 145° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
10 771 ...	**11 786 ...**	**11 787 ...**	**11 785 ...**	**10 735 ...**

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4		EUR T7		EUR T7		EUR T7		EUR T4	
11,30	12	118	71	56	45	214,40	11300	170,90	11300	170,90	11300	170,90	11300	250,60	11300
11,35	12	118	71	56	45			170,90	11350	170,90	11350	170,90	11350		
11,40	12	118	71	56	45	214,40	11400	170,90	11400	170,90	11400	170,90	11400	250,60	11400
11,45	12	118	71	56	45			170,90	11450	170,90	11450	170,90	11450		
11,50	12	118	71	56	45	214,40	11500	170,90	11500	170,90	11500	170,90	11500	250,60	11500
11,60	12	118	71	56	45	214,40	11600	170,90	11600	170,90	11600	170,90	11600	250,60	11600
11,70	12	118	71	56	45	214,40	11700	170,90	11700	170,90	11700	170,90	11700	250,60	11700
11,80	12	118	71	56	45	214,40	11800	170,90	11800	170,90	11800	170,90	11800	250,60	11800
11,90	12	118	71	56	45	214,40	11900	170,90	11900	170,90	11900	170,90	11900	250,60	11900
12,00	12	118	71	56	45	214,40	12000	170,90	12000	170,90	12000	170,90	12000	250,60	12000
12,15	14	124	77	60	45			231,70	12150	231,70	12150	231,70	12150		
12,20	14	124	77	60	45	288,30	12200								
12,25	14	124	77	60	45			231,70	12250	231,70	12250	231,70	12250		
12,50	14	124	77	60	45	288,30	12500	231,70	12500	231,70	12500	231,70	12500	340,60	12500
12,55	14	124	77	60	45			231,70	12550	231,70	12550	231,70	12550		
12,70	14	124	77	60	45			231,70	12700	231,70	12700	231,70	12700		
12,80	14	124	77	60	45	288,30	12800	231,70	12800	231,70	12800	231,70	12800	340,60	12800
12,90	14	124	77	60	45			231,70	12900	231,70	12900	231,70	12900		
13,00	14	124	77	60	45	288,30	13000	231,70	13000	231,70	13000	231,70	13000	340,60	13000
13,10	14	124	77	60	45			231,70	13100	231,70	13100	231,70	13100		
13,30	14	124	77	60	45			231,70	13300	231,70	13300	231,70	13300		
13,35	14	124	77	60	45			231,70	13350	231,70	13350	231,70	13350		
13,50	14	124	77	60	45	288,30	13500	231,70	13500	231,70	13500	231,70	13500	340,60	13500
13,70	14	124	77	60	45			231,70	13700	231,70	13700	231,70	13700		
13,80	14	124	77	60	45	288,30	13800	231,70	13800	231,70	13800	231,70	13800	340,60	13800
14,00	14	124	77	60	45	288,30	14000	231,70	14000	231,70	14000	231,70	14000	340,60	14000
14,20	16	133	83	63	48	350,60	14200	281,00	14200	281,00	14200	281,00	14200		
14,50	16	133	83	63	48	350,60	14500	281,00	14500	281,00	14500	281,00	14500	424,50	14500
14,80	16	133	83	63	48	350,60	14800	281,00	14800	281,00	14800	281,00	14800	424,50	14800
15,00	16	133	83	63	48	350,60	15000	281,00	15000	281,00	15000	281,00	15000	424,50	15000
15,10	16	133	83	63	48			281,00	15100	281,00	15100	281,00	15100		
15,20	16	133	83	63	48	350,60	15200								
15,25	16	133	83	63	48			281,00	15250	281,00	15250	281,00	15250		
15,30	16	133	83	63	48			281,00	15300	281,00	15300	281,00	15300		

P	●	●	●	●	●	
M	●					
K	●	●	●	●	●	
N						
S						
H		○	○	○	○	
O						

→ v_c Page 111–120

Ø DC_{m7} for Type UNI and Quattro 4F/ Ø DC_{h7} for Type Speed UNI

Continued on next page

WTX – High Performance Drill, DIN 6537



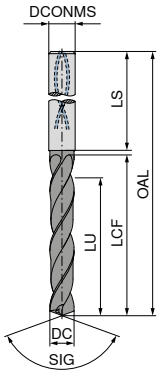

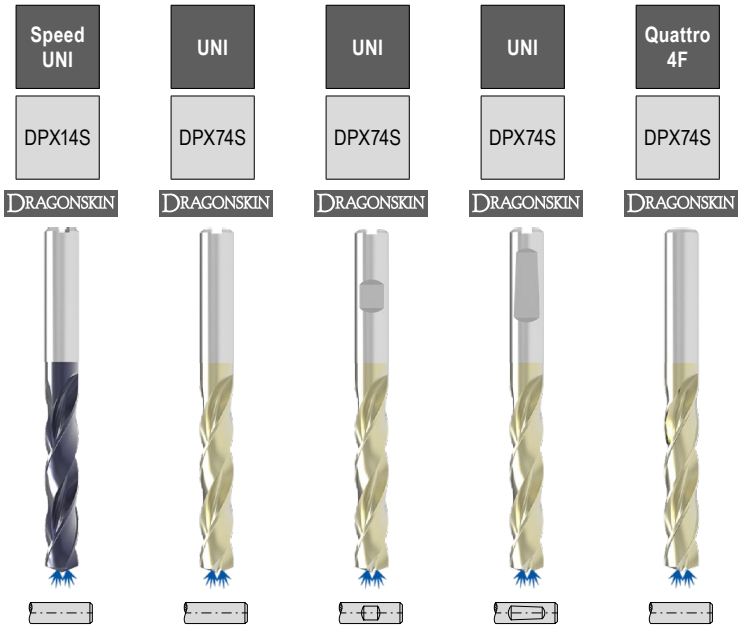

						SIG 145° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
						10 771 ...		11 786 ...		11 787 ...		11 785 ...		10 735 ...	
DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4		EUR T7		EUR T7		EUR T7		EUR T4	
15,35	16	133	83	63	48			281,00	15350	281,00	15350	281,00	15350		
15,50	16	133	83	63	48	350,60	15500	281,00	15500	281,00	15500	281,00	15500	424,50	15500
15,60	16	133	83	63	48			281,00	15600	281,00	15600	281,00	15600		
15,80	16	133	83	63	48	350,60	15800	281,00	15800	281,00	15800	281,00	15800	424,50	15800
16,00	16	133	83	63	48	350,60	16000	281,00	16000	281,00	16000	281,00	16000	424,50	16000
16,05	18	143	93	71	48			378,10	16050	378,10	16050	378,10	16050		
16,50	18	143	93	71	48	472,30	16500	378,10	16500	378,10	16500	378,10	16500	559,10	16500
16,80	18	143	93	71	48	472,30	16800	378,10	16800	378,10	16800	378,10	16800	559,10	16800
16,90	18	143	93	71	48			378,10	16900	378,10	16900	378,10	16900		
17,00	18	143	93	71	48	472,30	17000	378,10	17000	378,10	17000	378,10	17000	559,10	17000
17,50	18	143	93	71	48	472,30	17500	378,10	17500	378,10	17500	378,10	17500	559,10	17500
17,60	18	143	93	71	48			378,10	17600	378,10	17600	378,10	17600		
17,80	18	143	93	71	48	472,30	17800	378,10	17800	378,10	17800	378,10	17800	559,10	17800
18,00	18	143	93	71	48	472,30	18000	378,10	18000	378,10	18000	378,10	18000	559,10	18000
18,50	20	153	101	77	50			444,60	18500	444,60	18500	444,60	18500		
18,80	20	153	101	77	50			444,60	18800	444,60	18800	444,60	18800		
18,90	20	153	101	77	50			444,60	18900	444,60	18900	444,60	18900		
19,00	20	153	101	77	50			444,60	19000	444,60	19000	444,60	19000		
19,35	20	153	101	77	50			444,60	19350	444,60	19350	444,60	19350		
19,50	20	153	101	77	50			444,60	19500	444,60	19500	444,60	19500		
19,60	20	153	101	77	50			444,60	19600	444,60	19600	444,60	19600		
19,80	20	153	101	77	50			444,60	19800	444,60	19800	444,60	19800		
20,00	20	153	101	77	50			444,60	20000	444,60	20000	444,60	20000		
20,50	25	200	135	110	56			918,40	20500	918,40	20500	918,40	20500		
21,00	25	200	135	110	56			918,40	21000	918,40	21000	918,40	21000		
21,50	25	200	135	110	56			918,40	21500	918,40	21500	918,40	21500		
22,00	25	200	135	110	56			918,40	22000	918,40	22000	918,40	22000		
22,50	25	200	140	120	56			918,40	22500	918,40	22500	918,40	22500		
23,00	25	200	140	120	56			918,40	23000	918,40	23000	918,40	23000		
23,50	25	200	140	120	56			918,40	23500	918,40	23500	918,40	23500		
24,00	25	200	140	120	56			918,40	24000	918,40	24000	918,40	24000		
24,50	25	200	140	120	56			918,40	24500	918,40	24500	918,40	24500		
25,00	25	200	140	120	56			918,40	25000	918,40	25000	918,40	25000		
P						●		●		●		●		●	
M						●									
K						●		●		●		●		●	
N															
S															
H								○		○		○		○	
O															

→ v_c Page 111–120

Ø DC_{m7} for Type UNI and Quattro 4F/ Ø DC_{h7} for Type Speed UNI

WTX – High Performance Drill, DIN 6537





Speed VA | VA | AL

Ti800 | Ti700 | DLC

DRAGONSKIN

SIG 135° Solid carbide | SIG 140° Solid carbide | SIG 135° Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 773 ... EUR T4		10 745 ... EUR T4		10 791 ... EUR T4/9F	
2,50	4	57	21	17	28					98,49	02500
2,60	4	57	21	17	28					98,49	02600
2,70	4	57	21	17	28					98,49	02700
2,80	4	57	21	17	28					98,49	02800
2,90	4	57	21	17	28					98,49	02900
3,00	6	66	28	23	36	116,50	030	92,72	030	98,49	03000
3,10	6	66	28	23	36	116,50	031	92,72	031	98,49	03100
3,15	6	66	28	23	36			92,72	831		
3,20	6	66	28	23	36	116,50	032	92,72	032	98,49	03200
3,22	6	66	28	23	36			92,72	832		
3,25	6	66	28	23	36			92,72	890		
3,30	6	66	28	23	36	116,50	033	92,72	033	98,49	03300
3,40	6	66	28	23	36	116,50	034	92,72	034	98,49	03400
3,50	6	66	28	23	36	116,50	035	92,72	035	98,49	03500
3,60	6	66	28	23	36	116,50	036	92,72	036	98,49	03600
3,70	6	66	28	23	36	116,50	037	92,72	037	98,49	03700
3,80	6	74	36	29	36	116,50	038	92,72	038	97,19	03800
3,85	6	74	36	29	36			92,72	838		
3,90	6	74	36	29	36	116,50	039	92,72	039	97,19	03900
4,00	6	74	36	29	36	116,50	040	92,72	040	97,19	04000
4,10	6	74	36	29	36	116,50	041	92,72	041	97,19	04100
4,20	6	74	36	29	36	116,50	042	92,72	042	97,19	04200
4,30	6	74	36	29	36	116,50	043	92,72	043	97,19	04300
4,35	6	74	36	29	36			92,72	843		
4,40	6	74	36	29	36	116,50	044	92,72	044	97,19	04400
4,45	6	74	36	29	36			92,72	844		
4,50	6	74	36	29	36	116,50	045	92,72	045	97,19	04500
4,60	6	74	36	29	36	116,50	046	92,72	046	97,19	04600
4,65	6	74	36	29	36	116,50	900	92,72	900		
4,70	6	74	36	29	36	116,50	047	92,72	047	97,19	04700
4,80	6	82	44	35	36	116,50	048	92,72	048	95,46	04800
4,90	6	82	44	35	36	116,50	049	92,72	049	95,46	04900
5,00	6	82	44	35	36	116,50	050	92,72	050	95,46	05000
5,10	6	82	44	35	36	116,50	051	92,72	051	95,46	05100
5,20	6	82	44	35	36	116,50	052	92,72	052	95,46	05200
5,30	6	82	44	35	36	116,50	053	92,72	053	95,46	05300
5,40	6	82	44	35	36	116,50	054	92,72	054	95,46	05400

P	●	○	
M	●	●	
K	●	○	
N	○	○	●
S	●	●	
H			
O			

→ v_c Page 112–122

Ø DC_{m7} for Type VA / Ø DC_{h7} for Type Speed VA and AL

Continued on next page

WTX – High Performance Drill, DIN 6537





Speed VA | VA | AL

Ti800 | Ti700 | DLC

DRAGONSKIN

SIG 135° Solid carbide | SIG 140° Solid carbide | SIG 135° Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 773 ... EUR T4		10 745 ... EUR T4		10 791 ... EUR T4/9F	
5,50	6	82	44	35	36	116,50	055	92,72	055	95,46	05500
5,55	6	82	44	35	36	116,50	902				
5,60	6	82	44	35	36	116,50	056	92,72	056	95,46	05600
5,70	6	82	44	35	36	116,50	057	92,72	057	95,46	05700
5,75	6	82	44	35	36			92,72	916		
5,80	6	82	44	35	36	116,50	058	92,72	058	95,46	05800
5,90	6	82	44	35	36	116,50	059	92,72	059	95,46	05900
5,95	6	82	44	35	36			92,72	959		
6,00	6	82	44	35	36	116,50	060	92,72	060	95,46	06000
6,10	8	91	53	43	36	131,70	061	101,10	061	106,60	06100
6,20	8	91	53	43	36	131,70	062	101,10	062	106,60	06200
6,30	8	91	53	43	36	131,70	063	101,10	063	106,60	06300
6,40	8	91	53	43	36	131,70	064	101,10	064	106,60	06400
6,50	8	91	53	43	36	131,70	065	101,10	065	106,60	06500
6,60	8	91	53	43	36	131,70	066	101,10	066	106,60	06600
6,70	8	91	53	43	36	131,70	067	101,10	067	106,60	06700
6,80	8	91	53	43	36	131,70	068	101,10	068	106,60	06800
6,90	8	91	53	43	36	131,70	069	101,10	069	106,60	06900
7,00	8	91	53	43	36	131,70	070	101,10	070	106,60	07000
7,10	8	91	53	43	36	131,70	071	101,10	071	106,60	07100
7,20	8	91	53	43	36	131,70	072	101,10	072	106,60	07200
7,30	8	91	53	43	36	131,70	073	101,10	073	106,60	07300
7,40	8	91	53	43	36	131,70	074	101,10	074	106,60	07400
7,45	8	91	53	43	36			101,10	924		
7,50	8	91	53	43	36	131,70	075	101,10	075	106,60	07500
7,60	8	91	53	43	36	131,70	076	101,10	076	106,60	07600
7,70	8	91	53	43	36	131,70	077	101,10	077	106,60	07700
7,80	8	91	53	43	36	131,70	078	101,10	078	106,60	07800
7,90	8	91	53	43	36	131,70	079	101,10	079	106,60	07900
8,00	8	91	53	43	36	131,70	080	101,10	080	106,60	08000
8,10	10	103	61	49	40	165,20	081	143,70	081	124,70	08100
8,20	10	103	61	49	40	165,20	082	143,70	082	124,70	08200
8,30	10	103	61	49	40	165,20	083	143,70	083	124,70	08300
8,40	10	103	61	49	40	165,20	084	143,70	084	124,70	08400
8,50	10	103	61	49	40	165,20	085	143,70	085	124,70	08500
8,60	10	103	61	49	40	165,20	086	143,70	086	124,70	08600
8,70	10	103	61	49	40	165,20	087	143,70	087	124,70	08700

P	●	○	
M	●	●	
K	●	○	
N	○	○	●
S	●	●	
H			
O			

→ v_c Page 112–122

Ø DC_{m7} for Type VA / Ø DC_{h7} for Type Speed VA and AL

Continued on next page

WTX – High Performance Drill, DIN 6537





Speed VA | VA | AL

Ti800 | Ti700 | DLC

DRAGONSKIN

SIG 135° Solid carbide | SIG 140° Solid carbide | SIG 135° Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 773 ... EUR T4		10 745 ... EUR T4		10 791 ... EUR T4/9F	
8,80	10	103	61	49	40	165,20	088	143,70	088	124,70	08800
8,90	10	103	61	49	40	165,20	089	143,70	089	124,70	08900
9,00	10	103	61	49	40	165,20	090	143,70	090	124,70	09000
9,10	10	103	61	49	40	165,20	091	143,70	091	124,70	09100
9,20	10	103	61	49	40	165,20	092	143,70	092	124,70	09200
9,30	10	103	61	49	40	165,20	093	143,70	093	124,70	09300
9,35	10	103	61	49	40			143,70	930		
9,40	10	103	61	49	40	165,20	094	143,70	094	124,70	09400
9,45	10	103	61	49	40			143,70	994		
9,50	10	103	61	49	40	165,20	095	143,70	095	124,70	09500
9,60	10	103	61	49	40	165,20	096	143,70	096	124,70	09600
9,70	10	103	61	49	40	165,20	097	143,70	097	124,70	09700
9,80	10	103	61	49	40	165,20	098	143,70	098	124,70	09800
9,90	10	103	61	49	40	165,20	099	143,70	099	124,70	09900
10,00	10	103	61	49	40	165,20	100	143,70	100	124,70	10000
10,10	12	118	71	56	45	236,10	101	204,40	101	173,90	10100
10,20	12	118	71	56	45	236,10	102	204,40	102	173,90	10200
10,30	12	118	71	56	45	236,10	103	204,40	103	173,90	10300
10,40	12	118	71	56	45	236,10	104	204,40	104	173,90	10400
10,50	12	118	71	56	45	236,10	105	204,40	105	173,90	10500
10,55	12	118	71	56	45			204,40	932		
10,60	12	118	71	56	45	236,10	106	204,40	106	173,90	10600
10,70	12	118	71	56	45	236,10	107	204,40	107	173,90	10700
10,80	12	118	71	56	45	236,10	108	204,40	108	173,90	10800
10,90	12	118	71	56	45	236,10	109	204,40	109		
11,00	12	118	71	56	45	236,10	110	204,40	110	173,90	11000
11,10	12	118	71	56	45	236,10	111	204,40	111	173,90	11100
11,20	12	118	71	56	45	236,10	112	204,40	112	173,90	11200
11,25	12	118	71	56	45			204,40	912		
11,30	12	118	71	56	45	236,10	113	204,40	113	173,90	11300
11,35	12	118	71	56	45			204,40	913		
11,40	12	118	71	56	45	236,10	114	204,40	114	173,90	11400
11,45	12	118	71	56	45			204,40	914		
11,50	12	118	71	56	45	236,10	115	204,40	115	173,90	11500
11,60	12	118	71	56	45	236,10	116	204,40	116		
11,70	12	118	71	56	45	236,10	117	204,40	117	173,90	11700
11,80	12	118	71	56	45	236,10	118	204,40	118	173,90	11800

P	●	○	
M	●	●	
K	●	○	
N	○	○	●
S	●	●	
H			
O			

→ v_c Page 112–122

Ø DC_{m7} for Type VA / Ø DC_{h7} for Type Speed VA and AL

Continued on next page

WTX – High Performance Drill, DIN 6537





Speed VA | VA | AL

Ti800 | Ti700 | DLC

DRAGONSKIN

SIG 135°
Solid carbide

SIG 140°
Solid carbide

SIG 135°
Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 773 ... EUR T4		10 745 ... EUR T4		10 791 ... EUR T4/9F	
11,90	12	118	71	56	45	236,10	119	204,40	119		
12,00	12	118	71	56	45	236,10	120	204,40	120	173,90	12000
12,15	14	124	77	60	45			281,00	921		
12,20	14	124	77	60	45	314,30	12200			242,00	12200
12,50	14	124	77	60	45	314,30	125	281,00	125	242,00	12500
12,55	14	124	77	60	45			281,00	925		
12,60	14	124	77	60	45					242,00	12600
12,80	14	124	77	60	45	314,30	128	281,00	128	242,00	12800
13,00	14	124	77	60	45	314,30	130	281,00	130	242,00	13000
13,35	14	124	77	60	45			281,00	933		
13,50	14	124	77	60	45	314,30	135	281,00	135	242,00	13500
13,80	14	124	77	60	45	314,30	138	281,00	138	242,00	13800
14,00	14	124	77	60	45	314,30	140	281,00	140	242,00	14000
14,20	16	133	83	63	48					295,70	14200
14,50	16	133	83	63	48	382,50	145	350,60	145	295,70	14500
14,80	16	133	83	63	48	382,50	148	350,60	148	295,70	14800
15,00	16	133	83	63	48	382,50	150	350,60	150	295,70	15000
15,20	16	133	83	63	48					295,70	15200
15,35	16	133	83	63	48			350,60	953		
15,50	16	133	83	63	48	382,50	155	350,60	155	295,70	15500
15,80	16	133	83	63	48	382,50	158	350,60	158	295,70	15800
16,00	16	133	83	63	48	382,50	160	350,60	160	295,70	16000
16,05	18	143	93	71	48			460,60	960		
16,50	18	143	93	71	48	517,20	165	460,60	165	409,90	16500
16,80	18	143	93	71	48	517,20	168	460,60	168		
17,00	18	143	93	71	48	517,20	170	460,60	170	409,90	17000
17,50	18	143	93	71	48	517,20	175	460,60	175	409,90	17500
17,80	18	143	93	71	48	517,20	178	460,60	178		
18,00	18	143	93	71	48	517,20	180	460,60	180	409,90	18000
18,50	20	153	101	77	50	575,00	185	589,60	185	507,10	18500
18,80	20	153	101	77	50	575,00	188	589,60	188		
19,00	20	153	101	77	50	575,00	190	589,60	190	507,10	19000
19,35	20	153	101	77	50			589,60	993		
19,50	20	153	101	77	50	575,00	195	589,60	195	507,10	19500
19,80	20	153	101	77	50	575,00	198	589,60	198		
20,00	20	153	101	77	50	575,00	200	589,60	200	507,10	20000
P						●		○			
M						●		●			
K						●		○			
N						○		○		●	
S						●		●			
H											
O											

→ v_c Page 112–122

Ø DC_{m7} for Type VA / **Ø DC_{h7}** for Type Speed VA and AL

High Performance Drill, DIN 6537

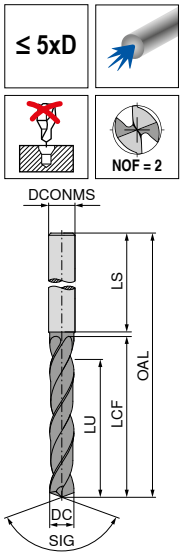

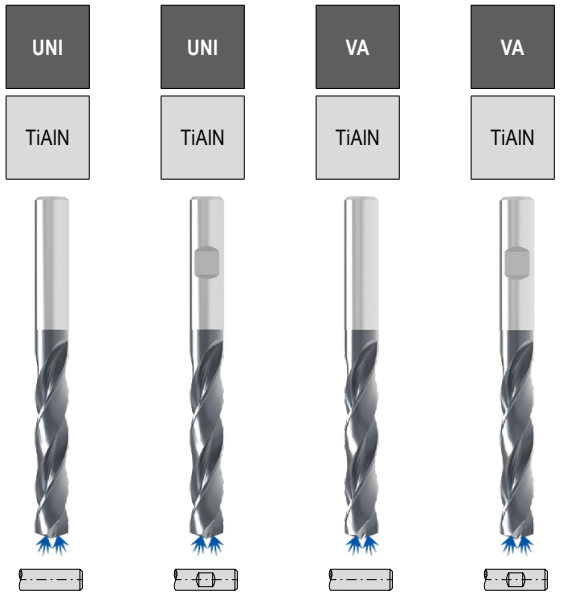

SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	11 702 ... EUR T1/9C		11 703 ... EUR T1/9C		11 715 ... EUR T1/9C		11 716 ... EUR T1/9C	
1,00	4	55	8	6,5	28	45,70	01000			46,67	01000		
1,10	4	55	12	10,3	28	45,70	01100			46,67	01100		
1,20	4	55	12	10,2	28	45,70	01200			46,67	01200		
1,30	4	55	12	10,0	28	45,70	01300			46,67	01300		
1,40	4	55	12	9,9	28	45,70	01400			46,67	01400		
1,50	4	55	12	9,7	28	45,70	01500			46,67	01500		
1,60	4	55	16	13,6	28	45,70	01600			46,67	01600		
1,70	4	55	16	13,4	28	45,70	01700			46,67	01700		
1,80	4	55	16	13,3	28	45,70	01800			46,67	01800		
1,90	4	55	16	13,1	28	45,70	01900			46,67	01900		
2,00	4	57	21	18,0	28	45,70	02000			46,67	02000		
2,10	4	57	21	17,8	28	45,70	02100			46,67	02100		
2,20	4	57	21	17,7	28	45,70	02200			46,67	02200		
2,30	4	57	21	17,5	28	45,70	02300			46,67	02300		
2,40	4	57	21	17,4	28	45,70	02400			46,67	02400		
2,50	4	57	21	17,2	28	45,70	02500			46,67	02500		
2,60	4	57	21	17,1	28	45,70	02600			46,67	02600		
2,70	4	57	21	16,9	28	45,70	02700			46,67	02700		
2,80	4	57	21	16,8	28	45,70	02800			46,67	02800		
2,90	4	57	21	16,6	28	45,70	02900			46,67	02900		
3,00	6	66	28	23,5	36	44,97	03000	44,97	03000	45,91	03000	45,91	03000
3,10	6	66	28	23,3	36	44,97	03100	44,97	03100	45,91	03100	45,91	03100
3,20	6	66	28	23,2	36	44,97	03200	44,97	03200	45,91	03200	45,91	03200
3,25	6	66	28	23,1	36	44,97	03250	44,97	03250				
3,30	6	66	28	23,0	36	44,97	03300	44,97	03300	45,91	03300	45,91	03300
3,40	6	66	28	22,9	36	44,97	03400	44,97	03400	45,91	03400	45,91	03400
3,50	6	66	28	22,7	36	44,97	03500	44,97	03500	45,91	03500	45,91	03500
3,60	6	66	28	22,6	36	44,97	03600	44,97	03600	45,91	03600	45,91	03600
3,70	6	66	28	22,4	36	44,97	03700	44,97	03700	45,91	03700	45,91	03700
3,80	6	74	36	30,3	36	44,97	03800	44,97	03800	45,91	03800	45,91	03800
3,85	6	74	36	30,2	36	44,97	03850	44,97	03850				
3,90	6	74	36	30,1	36	44,97	03900	44,97	03900	45,91	03900	45,91	03900
4,00	6	74	36	30,0	36	44,97	04000	44,97	04000	45,91	04000	45,91	04000
4,10	6	74	36	29,8	36	44,97	04100	44,97	04100	45,91	04100	45,91	04100
4,20	6	74	36	29,7	36	44,97	04200	44,97	04200	45,91	04200	45,91	04200
4,30	6	74	36	29,5	36	44,97	04300	44,97	04300	45,91	04300	45,91	04300
4,40	6	74	36	29,4	36	44,97	04400	44,97	04400	45,91	04400	45,91	04400
4,50	6	74	36	29,2	36	44,97	04500	44,97	04500	45,91	04500	45,91	04500
4,60	6	74	36	29,1	36	44,97	04600	44,97	04600	45,91	04600	45,91	04600
4,65	6	74	36	29,0	36	44,97	04650	44,97	04650				
4,70	6	74	36	28,9	36	44,97	04700	44,97	04700	45,91	04700	45,91	04700
4,80	6	82	44	36,8	36	44,97	04800	44,97	04800	45,91	04800	45,91	04800
4,90	6	82	44	36,6	36	44,97	04900	44,97	04900	45,91	04900	45,91	04900
5,00	6	82	44	36,5	36	44,97	05000	44,97	05000	45,91	05000	45,91	05000
5,10	6	82	44	36,3	36	44,97	05100	44,97	05100	45,91	05100	45,91	05100

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA

Continued on next page

High Performance Drill, DIN 6537



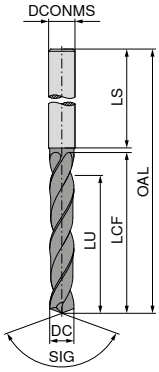

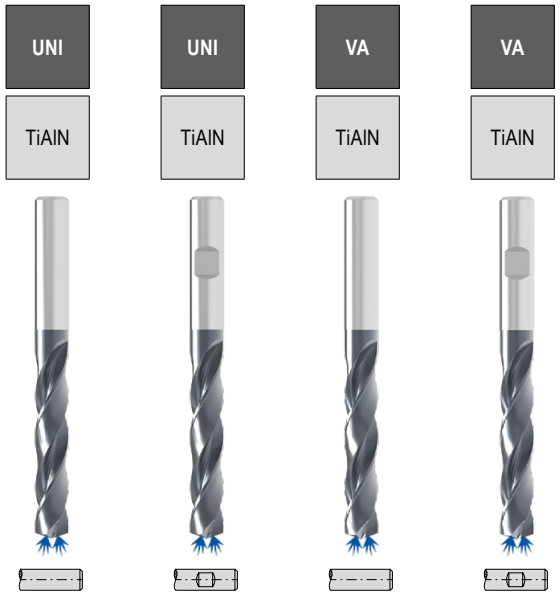

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	11 702 ... EUR T1/9C	11 703 ... EUR T1/9C	11 715 ... EUR T1/9C	11 716 ... EUR T1/9C
5,20	6	82	44	36,2	36	44,97 05200	44,97 05200	45,91 05200	45,91 05200
5,30	6	82	44	36,0	36	44,97 05300	44,97 05300	45,91 05300	45,91 05300
5,40	6	82	44	35,9	36	44,97 05400	44,97 05400	45,91 05400	45,91 05400
5,50	6	82	44	35,7	36	44,97 05500	44,97 05500	45,91 05500	45,91 05500
5,55	6	82	44	35,6	36	44,97 05550	44,97 05550		
5,60	6	82	44	35,6	36	44,97 05600	44,97 05600	45,91 05600	45,91 05600
5,65	6	82	44	35,5	36	44,97 05650	44,97 05650		
5,70	6	82	44	35,4	36	44,97 05700	44,97 05700	45,91 05700	45,91 05700
5,80	6	82	44	35,3	36	44,97 05800	44,97 05800	45,91 05800	45,91 05800
5,90	6	82	44	35,1	36	44,97 05900	44,97 05900	45,91 05900	45,91 05900
6,00	6	82	44	35,0	36	44,97 06000	44,97 06000	45,91 06000	45,91 06000
6,10	8	91	53	43,8	36	51,65 06100	51,65 06100	52,75 06100	52,75 06100
6,20	8	91	53	43,7	36	51,65 06200	51,65 06200	52,75 06200	52,75 06200
6,30	8	91	53	43,5	36	51,65 06300	51,65 06300	52,75 06300	52,75 06300
6,40	8	91	53	43,4	36	51,65 06400	51,65 06400	52,75 06400	52,75 06400
6,50	8	91	53	43,2	36	51,65 06500	51,65 06500	52,75 06500	52,75 06500
6,60	8	91	53	43,1	36	51,65 06600	51,65 06600	52,75 06600	52,75 06600
6,70	8	91	53	42,9	36	51,65 06700	51,65 06700	52,75 06700	52,75 06700
6,80	8	91	53	42,8	36	51,65 06800	51,65 06800	52,75 06800	52,75 06800
6,90	8	91	53	42,6	36	51,65 06900	51,65 06900	52,75 06900	52,75 06900
7,00	8	91	53	42,5	36	51,65 07000	51,65 07000	52,75 07000	52,75 07000
7,10	8	91	53	42,3	36	51,65 07100	51,65 07100	52,75 07100	52,75 07100
7,20	8	91	53	42,2	36	51,65 07200	51,65 07200	52,75 07200	52,75 07200
7,30	8	91	53	42,0	36	51,65 07300	51,65 07300	52,75 07300	52,75 07300
7,40	8	91	53	41,9	36	51,65 07400	51,65 07400	52,75 07400	52,75 07400
7,45	8	91	53	41,8	36			52,75 07450	52,75 07450
7,50	8	91	53	41,7	36	51,65 07500	51,65 07500	52,75 07500	52,75 07500
7,55	8	91	53	41,6	36	51,65 07550	51,65 07550	52,75 07550	52,75 07550
7,60	8	91	53	41,6	36	51,65 07600	51,65 07600	52,75 07600	52,75 07600
7,65	8	91	53	41,5	36	51,65 07650	51,65 07650		
7,70	8	91	53	41,4	36	51,65 07700	51,65 07700	52,75 07700	52,75 07700
7,80	8	91	53	41,3	36	51,65 07800	51,65 07800	52,75 07800	52,75 07800
7,90	8	91	53	41,1	36	51,65 07900	51,65 07900	52,75 07900	52,75 07900
8,00	8	91	53	41,0	36	51,65 08000	51,65 08000	52,75 08000	52,75 08000
8,10	10	103	61	48,8	40	59,08 08100	59,08 08100	60,32 08100	60,32 08100
8,20	10	103	61	48,7	40	59,08 08200	59,08 08200	60,32 08200	60,32 08200
8,30	10	103	61	48,5	40	59,08 08300	59,08 08300	60,32 08300	60,32 08300
8,40	10	103	61	48,4	40	59,08 08400	59,08 08400	60,32 08400	60,32 08400
8,50	10	103	61	48,2	40	59,08 08500	59,08 08500	60,32 08500	60,32 08500
8,60	10	103	61	48,1	40	59,08 08600	59,08 08600	60,32 08600	60,32 08600
8,70	10	103	61	47,9	40	59,08 08700	59,08 08700	60,32 08700	60,32 08700
8,80	10	103	61	47,8	40	59,08 08800	59,08 08800	60,32 08800	60,32 08800
8,90	10	103	61	47,6	40	59,08 08900	59,08 08900	60,32 08900	60,32 08900
9,00	10	103	61	47,5	40	59,08 09000	59,08 09000	60,32 09000	60,32 09000
9,10	10	103	61	47,3	40	59,08 09100	59,08 09100	60,32 09100	60,32 09100

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA

Continued on next page

High Performance Drill, DIN 6537



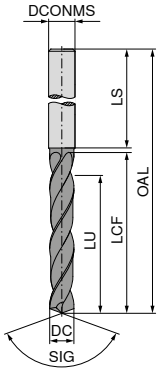

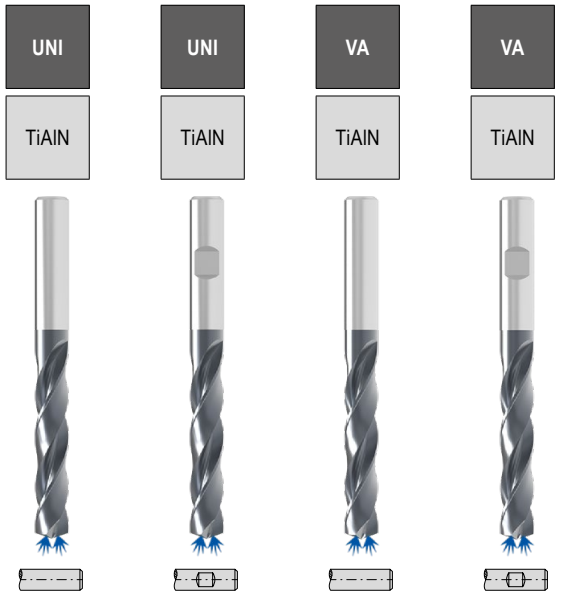

SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide | SIG 140° Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	11 702 ... EUR T1/9C		11 703 ... EUR T1/9C		11 715 ... EUR T1/9C		11 716 ... EUR T1/9C	
9,20	10	103	61	47,2	40	59,08	**09200**	59,08	**09200**	60,32	**09200**	60,32	**09200**
9,30	10	103	61	47,0	40	59,08	**09300**	59,08	**09300**	60,32	**09300**	60,32	**09300**
9,40	10	103	61	46,9	40	59,08	**09400**	59,08	**09400**	60,32	**09400**	60,32	**09400**
9,50	10	103	61	46,7	40	59,08	**09500**	59,08	**09500**	60,32	**09500**	60,32	**09500**
9,55	10	103	61	46,6	40	59,08	**09550**	59,08	**09550**				
9,60	10	103	61	46,6	40	59,08	**09600**	59,08	**09600**	60,32	**09600**	60,32	**09600**
9,70	10	103	61	46,4	40	59,08	**09700**	59,08	**09700**	60,32	**09700**	60,32	**09700**
9,80	10	103	61	46,3	40	59,08	**09800**	59,08	**09800**	60,32	**09800**	60,32	**09800**
9,90	10	103	61	46,1	40	59,08	**09900**	59,08	**09900**	60,32	**09900**	60,32	**09900**
10,00	10	103	61	46,0	40	59,08	**10000**	59,08	**10000**	60,32	**10000**	60,32	**10000**
10,10	12	118	71	55,8	45	87,87	**10100**	87,87	**10100**	89,73	**10100**	89,73	**10100**
10,20	12	118	71	55,7	45	87,87	**10200**	87,87	**10200**	89,73	**10200**	89,73	**10200**
10,30	12	118	71	55,5	45	87,87	**10300**	87,87	**10300**	89,73	**10300**	89,73	**10300**
10,40	12	118	71	55,4	45	87,87	**10400**	87,87	**10400**	89,73	**10400**	89,73	**10400**
10,50	12	118	71	55,2	45	87,87	**10500**	87,87	**10500**	89,73	**10500**	89,73	**10500**
10,60	12	118	71	55,1	45	87,87	**10600**	87,87	**10600**	89,73	**10600**	89,73	**10600**
10,70	12	118	71	54,9	45	87,87	**10700**	87,87	**10700**	89,73	**10700**	89,73	**10700**
10,80	12	118	71	54,8	45	87,87	**10800**	87,87	**10800**	89,73	**10800**	89,73	**10800**
10,90	12	118	71	54,6	45	87,87	**10900**	87,87	**10900**	89,73	**10900**	89,73	**10900**
11,00	12	118	71	54,5	45	87,87	**11000**	87,87	**11000**	89,73	**11000**	89,73	**11000**
11,10	12	118	71	54,3	45	87,87	**11100**	87,87	**11100**	89,73	**11100**	89,73	**11100**
11,20	12	118	71	54,2	45	87,87	**11200**	87,87	**11200**	89,73	**11200**	89,73	**11200**
11,30	12	118	71	54,0	45	87,87	**11300**	87,87	**11300**	89,73	**11300**	89,73	**11300**
11,40	12	118	71	53,9	45	87,87	**11400**	87,87	**11400**	89,73	**11400**	89,73	**11400**
11,50	12	118	71	53,7	45	87,87	**11500**	87,87	**11500**	89,73	**11500**	89,73	**11500**
11,60	12	118	71	53,6	45	87,87	**11600**	87,87	**11600**	89,73	**11600**	89,73	**11600**
11,70	12	118	71	53,4	45	87,87	**11700**	87,87	**11700**	89,73	**11700**	89,73	**11700**
11,80	12	118	71	53,3	45	87,87	**11800**	87,87	**11800**	89,73	**11800**	89,73	**11800**
11,90	12	118	71	53,1	45	87,87	**11900**	87,87	**11900**	89,73	**11900**	89,73	**11900**
12,00	12	118	71	53,0	45	87,87	**12000**	87,87	**12000**	89,73	**12000**	89,73	**12000**
12,10	14	124	77	58,8	45	112,10	**12100**	112,10	**12100**	114,40	**12100**	114,40	**12100**
12,20	14	124	77	58,7	45	112,10	**12200**	112,10	**12200**	114,40	**12200**	114,40	**12200**
12,40	14	124	77	58,4	45	112,10	**12400**	112,10	**12400**	114,40	**12400**	114,40	**12400**
12,50	14	124	77	58,2	45	112,10	**12500**	112,10	**12500**	114,40	**12500**	114,40	**12500**
12,60	14	124	77	58,1	45	112,10	**12600**	112,10	**12600**	114,40	**12600**	114,40	**12600**
12,70	14	124	77	57,9	45	112,10	**12700**	112,10	**12700**	114,40	**12700**	114,40	**12700**
12,80	14	124	77	57,8	45	112,10	**12800**	112,10	**12800**	114,40	**12800**	114,40	**12800**
13,00	14	124	77	57,5	45	112,10	**13000**	112,10	**13000**	114,40	**13000**	114,40	**13000**
13,10	14	124	77	57,3	45	112,10	**13100**	112,10	**13100**	114,40	**13100**	114,40	**13100**
13,20	14	124	77	57,2	45	112,10	**13200**	112,10	**13200**	114,40	**13200**	114,40	**13200**
13,30	14	124	77	57,0	45	112,10	**13300**	112,10	**13300**	114,40	**13300**	114,40	**13300**
13,50	14	124	77	56,7	45	112,10	**13500**	112,10	**13500**	114,40	**13500**	114,40	**13500**
13,70	14	124	77	56,4	45					114,40	**13700**	114,40	**13700**
13,80	14	124	77	56,3	45	112,10	**13800**	112,10	**13800**	114,40	**13800**	114,40	**13800**
14,00	14	124	77	56,0	45	112,10	**14000**	112,10	**14000**	114,40	**14000**	114,40	**14000**

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

Continued on next page

High Performance Drill, DIN 6537



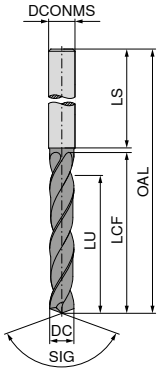

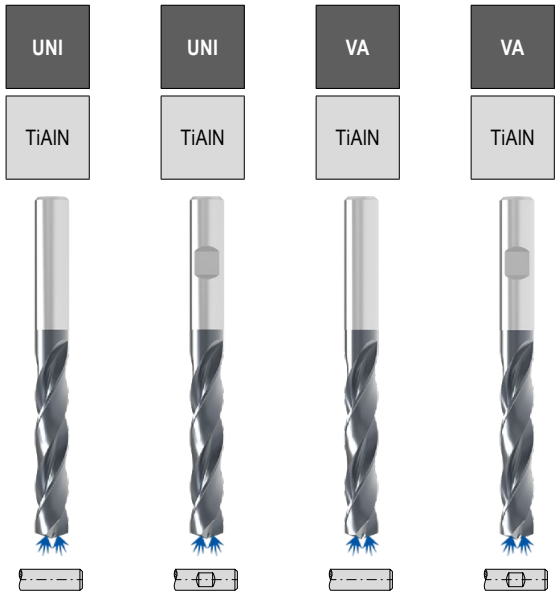

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

SIG 140°
Solid carbide

DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	11 702 ... EUR T1/9C		11 703 ... EUR T1/9C		11 715 ... EUR T1/9C		11 716 ... EUR T1/9C	
14,20	16	133	83	61,7	48	143,80	**14200**	143,80	**14200**	146,80	**14200**	146,80	**14200**
14,30	16	133	83	61,5	48	143,80	**14300**	143,80	**14300**	146,80	**14300**	146,80	**14300**
14,40	16	133	83	61,4	48	143,80	**14400**	143,80	**14400**	146,80	**14400**	146,80	**14400**
14,50	16	133	83	61,2	48	143,80	**14500**	143,80	**14500**	146,80	**14500**	146,80	**14500**
14,70	16	133	83	60,9	48					146,80	**14700**	146,80	**14700**
14,80	16	133	83	60,8	48	143,80	**14800**	143,80	**14800**	146,80	**14800**	146,80	**14800**
15,00	16	133	83	60,5	48	143,80	**15000**	143,80	**15000**	146,80	**15000**	146,80	**15000**
15,10	16	133	83	60,3	48	143,80	**15100**	143,80	**15100**	146,80	**15100**	146,80	**15100**
15,20	16	133	83	60,2	48	143,80	**15200**	143,80	**15200**	146,80	**15200**	146,80	**15200**
15,25	16	133	83	60,1	48	143,80	**15250**	143,80	**15250**				
15,30	16	133	83	60,0	48	143,80	**15300**	143,80	**15300**	146,80	**15300**	146,80	**15300**
15,50	16	133	83	59,7	48	143,80	**15500**	143,80	**15500**	146,80	**15500**	146,80	**15500**
15,70	16	133	83	59,4	48					146,80	**15700**	146,80	**15700**
15,80	16	133	83	59,3	48	143,80	**15800**	143,80	**15800**	146,80	**15800**	146,80	**15800**
16,00	16	133	83	59,0	48	143,80	**16000**	143,80	**16000**	146,80	**16000**	146,80	**16000**
16,20	18	143	93	68,7	48	222,40	**16200**	222,40	**16200**	227,00	**16200**	227,00	**16200**
16,30	18	143	93	68,5	48	222,40	**16300**	222,40	**16300**	227,00	**16300**	227,00	**16300**
16,50	18	143	93	68,2	48	222,40	**16500**	222,40	**16500**	227,00	**16500**	227,00	**16500**
16,80	18	143	93	67,8	48	222,40	**16800**	222,40	**16800**	227,00	**16800**	227,00	**16800**
17,00	18	143	93	67,5	48	222,40	**17000**	222,40	**17000**	227,00	**17000**	227,00	**17000**
17,30	18	143	93	67,0	48	222,40	**17300**	222,40	**17300**	227,00	**17300**	227,00	**17300**
17,50	18	143	93	66,7	48	222,40	**17500**	222,40	**17500**	227,00	**17500**	227,00	**17500**
18,00	18	143	93	66,0	48	222,40	**18000**	222,40	**18000**	227,00	**18000**	227,00	**18000**
18,50	20	153	101	73,2	50	241,80	**18500**	241,80	**18500**	246,90	**18500**	246,90	**18500**
18,90	20	153	101	72,6	50	241,80	**18900**	241,80	**18900**	246,90	**18900**	246,90	**18900**
19,00	20	153	101	72,5	50	241,80	**19000**	241,80	**19000**	246,90	**19000**	246,90	**19000**
19,20	20	153	101	72,2	50	241,80	**19200**	241,80	**19200**	246,90	**19200**	246,90	**19200**
19,30	20	153	101	72,0	50	241,80	**19300**	241,80	**19300**	246,90	**19300**	246,90	**19300**
19,50	20	153	101	71,7	50	241,80	**19500**	241,80	**19500**	246,90	**19500**	246,90	**19500**
19,70	20	153	101	71,4	50	241,80	**19700**	241,80	**19700**	246,90	**19700**	246,90	**19700**
20,00	20	153	101	71,0	50	241,80	**20000**	241,80	**20000**	246,90	**20000**	246,90	**20000**

P	●	●	○	○
M	●	●	●	●
K	●	●		
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

Ø DC_{h7} for Type UNI / **Ø DC_{m7}** for Type VA

WTX – High-performance drill, DIN 6537

▲ Specialist for difficult to machine materials

2







SIG 140°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 787 ... EUR T4/9F	
3,00	6	66	28	23	36	93,14	030
3,10	6	66	28	23	36	93,14	031
3,20	6	66	28	23	36	93,14	032
3,30	6	66	28	23	36	93,14	033
3,40	6	66	28	23	36	93,14	034
3,50	6	66	28	23	36	93,14	035
3,60	6	66	28	23	36	93,14	036
3,70	6	66	28	23	36	93,14	037
3,80	6	74	36	29	36	93,14	038
3,90	6	74	36	29	36	93,14	039
3,97	6	74	36	29	36	93,14	900
4,00	6	74	36	29	36	93,14	040
4,10	6	74	36	29	36	93,14	041
4,20	6	74	36	29	36	93,14	042
4,23	6	74	36	29	36	93,14	901
4,30	6	74	36	29	36	93,14	043
4,40	6	74	36	29	36	93,14	044
4,50	6	74	36	29	36	93,14	045
4,60	6	74	36	29	36	93,14	046
4,70	6	74	36	29	36	93,14	047
4,80	6	82	44	35	36	93,14	048
4,90	6	82	44	35	36	93,14	049
5,00	6	82	44	35	36	93,14	050
5,10	6	82	44	35	36	93,14	051
5,20	6	82	44	35	36	93,14	052
5,30	6	82	44	35	36	93,14	053
5,40	6	82	44	35	36	93,14	054
5,50	6	82	44	35	36	93,14	055
5,56	6	82	44	35	36	93,14	902
5,60	6	82	44	35	36	93,14	056
5,70	6	82	44	35	36	93,14	057
5,80	6	82	44	35	36	93,14	058
5,90	6	82	44	35	36	93,14	059
6,00	6	82	44	35	36	93,14	060
6,10	8	91	53	43	36	103,90	061
6,20	8	91	53	43	36	103,90	062
6,30	8	91	53	43	36	103,90	063
6,35	8	91	53	43	36	103,90	903
6,40	8	91	53	43	36	103,90	064
6,50	8	91	53	43	36	103,90	065
6,60	8	91	53	43	36	103,90	066
6,70	8	91	53	43	36	103,90	067
6,80	8	91	53	43	36	103,90	068
6,90	8	91	53	43	36	103,90	069
7,00	8	91	53	43	36	103,90	070
7,10	8	91	53	43	36	103,90	071
7,20	8	91	53	43	36	103,90	072
7,30	8	91	53	43	36	103,90	073
7,40	8	91	53	43	36	103,90	074
7,50	8	91	53	43	36	103,90	075
7,60	8	91	53	43	36	103,90	076
7,70	8	91	53	43	36	103,90	077
7,80	8	91	53	43	36	103,90	078
7,90	8	91	53	43	36	103,90	079
7,94	8	91	53	43	36	103,90	904
8,00	8	91	53	43	36	103,90	080
8,10	10	103	61	49	40	121,70	081
8,20	10	103	61	49	40	121,70	082
8,30	10	103	61	49	40	121,70	083
8,40	10	103	61	49	40	121,70	084
8,50	10	103	61	49	40	121,70	085
8,60	10	103	61	49	40	121,70	086
8,70	10	103	61	49	40	121,70	087
8,80	10	103	61	49	40	121,70	088
8,90	10	103	61	49	40	121,70	089
9,00	10	103	61	49	40	121,70	090
9,10	10	103	61	49	40	121,70	091
9,20	10	103	61	49	40	121,70	092
9,30	10	103	61	49	40	121,70	093
9,40	10	103	61	49	40	121,70	094
9,50	10	103	61	49	40	121,70	095
9,53	10	103	61	49	40	121,70	905
9,60	10	103	61	49	40	121,70	096
9,70	10	103	61	49	40	121,70	097
9,80	10	103	61	49	40	121,70	098
9,90	10	103	61	49	40	121,70	099
10,00	10	103	61	49	40	121,70	100
10,10	12	118	71	54	45	169,60	101
10,20	12	118	71	54	45	169,60	102
10,30	12	118	71	54	45	169,60	103
10,40	12	118	71	54	45	169,60	104
10,50	12	118	71	54	45	169,60	105
10,60	12	118	71	54	45	169,60	106
10,70	12	118	71	54	45	169,60	107
10,80	12	118	71	54	45	169,60	108
10,90	12	118	71	54	45	169,60	109
11,00	12	118	71	54	45	169,60	110
11,10	12	118	71	54	45	169,60	111
11,11	12	118	71	54	45	169,60	906
11,20	12	118	71	54	45	169,60	112
11,30	12	118	71	54	45	169,60	113
11,40	12	118	71	54	45	169,60	114
11,50	12	118	71	54	45	169,60	115
11,60	12	118	71	54	45	169,60	116
11,70	12	118	71	54	45	169,60	117
11,80	12	118	71	54	45	169,60	118
11,90	12	118	71	54	45	169,60	119
12,00	12	118	71	54	45	169,60	120
12,10	14	124	77	58	45	237,60	121
12,20	14	124	77	58	45	237,60	122
12,30	14	124	77	58	45	237,60	123
12,40	14	124	77	58	45	237,60	124
12,50	14	124	77	58	45	237,60	125
12,60	14	124	77	58	45	237,60	126
12,70	14	124	77	58	45	237,60	907
12,80	14	124	77	58	45	237,60	128
12,90	14	124	77	58	45	237,60	129
13,00	14	124	77	58	45	237,60	130
13,10	14	124	77	58	45	237,60	131
13,20	14	124	77	58	45	237,60	132
13,30	14	124	77	58	45	237,60	133
13,40	14	124	77	58	45	237,60	134
13,50	14	124	77	58	45	237,60	135
13,60	14	124	77	58	45	237,60	136
13,70	14	124	77	58	45	237,60	137
13,80	14	124	77	58	45	237,60	138
13,90	14	124	77	58	45	237,60	139

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c Page 109

Continued on next page

WTX – High-performance drill, DIN 6537

▲ Specialist for difficult to machine materials





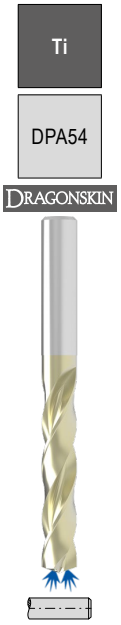

SIG 140°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 787 ... EUR T4/9F	
14,0	14	124	77	58	45	237,60	140
14,1	16	133	83	61	48	289,80	141
14,2	16	133	83	61	48	289,80	142
14,3	16	133	83	61	48	289,80	143
14,4	16	133	83	61	48	289,80	144
14,5	16	133	83	61	48	289,80	145
14,6	16	133	83	61	48	289,80	146
14,7	16	133	83	61	48	289,80	147
14,8	16	133	83	61	48	289,80	148
14,9	16	133	83	61	48	289,80	149
15,0	16	133	83	61	48	289,80	150
15,1	16	133	83	61	48	289,80	151
15,2	16	133	83	61	48	289,80	152
15,3	16	133	83	61	48	289,80	153
15,4	16	133	83	61	48	289,80	154
15,5	16	133	83	61	48	289,80	155
15,6	16	133	83	61	48	289,80	156
15,7	16	133	83	61	48	289,80	157
15,8	16	133	83	61	48	289,80	158
15,9	16	133	83	61	48	289,80	159
16,0	16	133	83	61	48	289,80	160
16,1	18	143	93	69	48	289,80	161
16,2	18	143	93	69	48	289,80	162
16,3	18	143	93	69	48	289,80	163
16,4	18	143	93	69	48	289,80	164
16,5	18	143	93	69	48	399,80	165
16,6	18	143	93	69	48	399,80	166
16,7	18	143	93	69	48	399,80	167
16,8	18	143	93	69	48	399,80	168
16,9	18	143	93	69	48	399,80	169
17,0	18	143	93	69	48	399,80	170
17,1	18	143	93	69	48	399,80	171
17,2	18	143	93	69	48	399,80	172
17,3	18	143	93	69	48	399,80	173
17,4	18	143	93	69	48	399,80	174
17,5	18	143	93	69	48	399,80	175
17,6	18	143	93	69	48	399,80	176
17,7	18	143	93	69	48	399,80	177
17,8	18	143	93	69	48	399,80	178
17,9	18	143	93	69	48	399,80	179
18,0	18	143	93	69	48	399,80	180
18,1	20	153	101	75	50	495,40	181
18,2	20	153	101	75	50	495,40	182
18,3	20	153	101	75	50	495,40	183
18,4	20	153	101	75	50	495,40	184
18,5	20	153	101	75	50	495,40	185
18,6	20	153	101	75	50	495,40	186
18,7	20	153	101	75	50	495,40	187
18,8	20	153	101	75	50	495,40	188
18,9	20	153	101	75	50	495,40	189
19,0	20	153	101	75	50	495,40	190
19,1	20	153	101	75	50	495,40	191
19,2	20	153	101	75	50	495,40	192
19,3	20	153	101	75	50	495,40	193
19,4	20	153	101	75	50	495,40	194
19,5	20	153	101	75	50	495,40	195
19,6	20	153	101	75	50	495,40	196
19,7	20	153	101	75	50	495,40	197
19,8	20	153	101	75	50	495,40	198
19,9	20	153	101	75	50	495,40	199
20,0	20	153	101	75	50	495,40	200

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c Page 109

WTX – High Performance Drill, DIN 6537

▲ universal application
▲ four guidance lands
▲ polished chip flutes
▲ Type ALU 5xD on request
▲ PL = corner chamfers





180

Ti800

SIG 180°
Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	PL mm	10 721 ... EUR T4	
3,00	6	66	28	23	36	0,15	112,40	030
3,10	6	66	28	23	36	0,16	112,40	031
3,20	6	66	28	23	36	0,16	112,40	032
3,30	6	66	28	23	36	0,17	112,40	033
3,40	6	66	28	23	36	0,17	112,40	034
3,50	6	66	28	23	36	0,18	112,40	035
3,60	6	66	28	23	36	0,18	112,40	036
3,70	6	66	28	23	36	0,19	112,40	037
3,80	6	74	36	29	36	0,19	112,40	038
3,90	6	74	36	29	36	0,20	112,40	039
4,00	6	74	36	29	36	0,20	112,40	040
4,10	6	74	36	29	36	0,21	112,40	041
4,20	6	74	36	29	36	0,21	112,40	042
4,30	6	74	36	29	36	0,22	112,40	043
4,40	6	74	36	29	36	0,22	112,40	044
4,50	6	74	36	29	36	0,23	112,40	045
4,60	6	74	36	29	36	0,23	112,40	046
4,65	6	74	36	29	36	0,23	112,40	900
4,70	6	74	36	29	36	0,24	112,40	047
4,80	6	82	44	35	36	0,24	112,40	048
4,90	6	82	44	35	36	0,25	112,40	049
5,00	6	82	44	35	36	0,25	112,40	050
5,10	6	82	44	35	36	0,26	112,40	051
5,20	6	82	44	35	36	0,26	112,40	052
5,30	6	82	44	35	36	0,27	112,40	053
5,40	6	82	44	35	36	0,27	112,40	054
5,50	6	82	44	35	36	0,28	112,40	055
5,55	6	82	44	35	36	0,28	112,40	902
5,60	6	82	44	35	36	0,28	112,40	056
5,70	6	82	44	35	36	0,29	112,40	057
5,80	6	82	44	35	36	0,29	112,40	058
5,90	6	82	44	35	36	0,30	112,40	059
6,00	6	82	44	35	36	0,30	112,40	060
6,10	8	91	53	43	36	0,31	126,20	061
6,20	8	91	53	43	36	0,31	126,20	062
6,30	8	91	53	43	36	0,32	126,20	063
6,40	8	91	53	43	36	0,32	126,20	064
6,50	8	91	53	43	36	0,33	126,20	065
6,60	8	91	53	43	36	0,33	126,20	066
6,70	8	91	53	43	36	0,34	126,20	067
6,80	8	91	53	43	36	0,34	126,20	068
6,90	8	91	53	43	36	0,35	126,20	069
7,00	8	91	53	43	36	0,35	126,20	070
7,10	8	91	53	43	36	0,36	126,20	071
7,20	8	91	53	43	36	0,36	126,20	072
7,30	8	91	53	43	36	0,37	126,20	073
7,40	8	91	53	43	36	0,37	126,20	074
7,50	8	91	53	43	36	0,38	126,20	075
7,60	8	91	53	43	36	0,38	126,20	076
7,70	8	91	53	43	36	0,39	126,20	077
7,80	8	91	53	43	36	0,39	126,20	078
7,90	8	91	53	43	36	0,40	126,20	079
8,00	8	91	53	43	36	0,40	126,20	080
8,10	10	103	61	49	40	0,41	175,30	081

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	PL mm	10 721 ... EUR T4	
8,20	10	103	61	49	40	0,41	175,30	082
8,30	10	103	61	49	40	0,42	175,30	083
8,40	10	103	61	49	40	0,42	175,30	084
8,50	10	103	61	49	40	0,43	175,30	085
8,60	10	103	61	49	40	0,43	175,30	086
8,70	10	103	61	49	40	0,44	175,30	087
8,80	10	103	61	49	40	0,44	175,30	088
8,90	10	103	61	49	40	0,45	175,30	089
9,00	10	103	61	49	40	0,45	175,30	090
9,10	10	103	61	49	40	0,46	175,30	091
9,20	10	103	61	49	40	0,46	175,30	092
9,30	10	103	61	49	40	0,47	175,30	093
9,40	10	103	61	49	40	0,47	175,30	094
9,50	10	103	61	49	40	0,48	175,30	095
9,60	10	103	61	49	40	0,48	175,30	096
9,70	10	103	61	49	40	0,49	175,30	097
9,80	10	103	61	49	40	0,49	175,30	098
9,90	10	103	61	49	40	0,50	175,30	099
10,00	10	103	61	49	40	0,50	175,30	100
10,10	12	116	69	54	45	0,51	244,80	101
10,20	12	116	69	54	45	0,51	244,80	102
10,30	12	116	69	54	45	0,52	244,80	103
10,40	12	116	69	54	45	0,52	244,80	104
10,50	12	116	69	54	45	0,53	244,80	105
10,60	12	116	69	54	45	0,53	244,80	106
10,70	12	116	69	54	45	0,54	244,80	107
10,80	12	116	69	54	45	0,54	244,80	108
10,90	12	116	69	54	45	0,55	244,80	109
11,00	12	116	69	54	45	0,55	244,80	110
11,10	12	116	69	54	45	0,56	244,80	111
11,20	12	116	69	54	45	0,56	244,80	112
11,30	12	116	69	54	45	0,57	244,80	113
11,40	12	116	69	54	45	0,57	244,80	114
11,50	12	116	69	54	45	0,58	244,80	115
11,60	12	116	69	54	45	0,58	244,80	116
11,70	12	116	69	54	45	0,59	244,80	117
11,80	12	116	69	54	45	0,59	244,80	118
11,90	12	116	69	54	45	0,60	244,80	119
12,00	12	116	69	54	45	0,60	244,80	120
12,50	14	122	75	58	45	0,63	337,50	125
12,80	14	122	75	58	45	0,64	337,50	128
13,00	14	122	75	58	45	0,65	337,50	130
13,50	14	122	75	58	45	0,68	337,50	135
13,80	14	122	75	58	45	0,69	337,50	138
14,00	14	122	75	58	45	0,70	337,50	140
14,50	16	131	81	61	48	0,73	420,10	145
14,80	16	131	81	61	48	0,74	420,10	148
15,00	16	131	81	61	48	0,75	420,10	150
15,50	16	131	81	61	48	0,78	420,10	155
15,80	16	131	81	61	48	0,79	420,10	158
16,00	16	131	81	61	48	0,80	420,10	160
16,50	18	141	91	69	48	0,83	549,10	165
16,80	18	141	91	69	48	0,84	549,10	168
17,00	18	141	91	69	48	0,85	549,10	170
17,50	18	141	91	69	48	0,88	549,10	175
17,80	18	141	91	69	48	0,89	549,10	178
18,00	18	141	91	69	48	0,90	549,10	180
18,50	20	151	99	75	50	0,93	704,00	185
18,80	20	151	99	75	50	0,94	704,00	188
19,00	20	151	99	75	50	0,95	704,00	190
19,50	20	151	99	75	50	0,98	704,00	195
19,80	20	151	99	75	50	0,99	704,00	198
20,00	20	151	99	75	50	1,00	704,00	200

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 127
→ Machining information: Page 127

WTX – High Feed Drill, factory standard

▲ Three fluted high-feed drill
▲ Universal application
▲ High positioning accuracy
▲ Suitable for difficult drilling applications





Feed UNI

DPX74S

DRAGONSKIN

SIG 140°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 789 ... EUR T4	
4,00	6	74	36	29	36	116,00	04000
4,10	6	74	36	29	36	116,00	04100
4,20	6	74	36	29	36	116,00	04200
4,30	6	74	36	29	36	116,00	04300
4,40	6	74	36	29	36	116,00	04400
4,50	6	74	36	29	36	116,00	04500
4,60	6	74	36	29	36	116,00	04600
4,70	6	74	36	29	36	116,00	04700
4,80	6	82	44	35	36	116,00	04800
4,90	6	82	44	35	36	116,00	04900
5,00	6	82	44	35	36	116,00	05000
5,10	6	82	44	35	36	116,00	05100
5,20	6	82	44	35	36	116,00	05200
5,30	6	82	44	35	36	116,00	05300
5,40	6	82	44	35	36	116,00	05400
5,50	6	82	44	35	36	116,00	05500
5,55	6	82	44	35	36	116,00	05550
5,60	6	82	44	35	36	116,00	05600
5,70	6	82	44	35	36	116,00	05700
5,80	6	82	44	35	36	116,00	05800
5,90	6	82	44	35	36	116,00	05900
6,00	6	82	44	35	36	116,00	06000
6,10	8	91	53	43	36	130,90	06100
6,20	8	91	53	43	36	130,90	06200
6,30	8	91	53	43	36	130,90	06300
6,40	8	91	53	43	36	130,90	06400
6,50	8	91	53	43	36	130,90	06500
6,60	8	91	53	43	36	130,90	06600
6,70	8	91	53	43	36	130,90	06700
6,80	8	91	53	43	36	130,90	06800
6,90	8	91	53	43	36	130,90	06900
7,00	8	91	53	43	36	130,90	07000
7,10	8	91	53	43	36	130,90	07100
7,20	8	91	53	43	36	130,90	07200
7,30	8	91	53	43	36	130,90	07300
7,40	8	91	53	43	36	130,90	07400
7,50	8	91	53	43	36	130,90	07500
7,60	8	91	53	43	36	130,90	07600
7,70	8	91	53	43	36	130,90	07700
7,80	8	91	53	43	36	130,90	07800
7,90	8	91	53	43	36	130,90	07900
8,00	8	91	53	43	36	130,90	08000
8,10	10	103	61	49	40	173,90	08100
8,20	10	103	61	49	40	173,90	08200
8,30	10	103	61	49	40	173,90	08300
8,40	10	103	61	49	40	173,90	08400
8,50	10	103	61	49	40	173,90	08500
8,60	10	103	61	49	40	173,90	08600
8,70	10	103	61	49	40	173,90	08700
8,80	10	103	61	49	40	173,90	08800
8,90	10	103	61	49	40	173,90	08900
9,00	10	103	61	49	40	173,90	09000

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 789 ... EUR T4	
9,10	10	103	61	49	40	173,90	09100
9,20	10	103	61	49	40	173,90	09200
9,30	10	103	61	49	40	173,90	09300
9,40	10	103	61	49	40	173,90	09400
9,50	10	103	61	49	40	173,90	09500
9,60	10	103	61	49	40	173,90	09600
9,70	10	103	61	49	40	173,90	09700
9,80	10	103	61	49	40	173,90	09800
9,90	10	103	61	49	40	173,90	09900
10,00	10	103	61	49	40	173,90	10000
10,10	12	118	71	56	45	246,20	10100
10,20	12	118	71	56	45	246,20	10200
10,30	12	118	71	56	45	246,20	10300
10,40	12	118	71	56	45	246,20	10400
10,50	12	118	71	56	45	246,20	10500
10,60	12	118	71	56	45	246,20	10600
10,70	12	118	71	56	45	246,20	10700
10,80	12	118	71	56	45	246,20	10800
10,90	12	118	71	56	45	246,20	10900
11,00	12	118	71	56	45	246,20	11000
11,10	12	118	71	56	45	246,20	11100
11,20	12	118	71	56	45	246,20	11200
11,30	12	118	71	56	45	246,20	11300
11,40	12	118	71	56	45	246,20	11400
11,50	12	118	71	56	45	246,20	11500
11,60	12	118	71	56	45	246,20	11600
11,70	12	118	71	56	45	246,20	11700
11,80	12	118	71	56	45	246,20	11800
11,90	12	118	71	56	45	246,20	11900
12,00	12	118	71	56	45	246,20	12000
12,20	14	124	77	60	45	331,70	12200
12,50	14	124	77	60	45	331,70	12500
12,80	14	124	77	60	45	331,70	12800
13,00	14	124	77	60	45	331,70	13000
13,50	14	124	77	60	45	331,70	13500
13,80	14	124	77	60	45	331,70	13800
14,00	14	124	77	60	45	331,70	14000
14,50	16	133	83	63	48	399,80	14500
14,80	16	133	83	63	48	399,80	14800
15,00	16	133	83	63	48	399,80	15000
15,50	16	133	83	63	48	399,80	15500
15,80	16	133	83	63	48	399,80	15800
16,00	16	133	83	63	48	399,80	16000
16,50	18	143	93	71	48	524,60	16500
16,80	18	143	93	71	48	524,60	16800
17,00	18	143	93	71	48	524,60	17000
17,50	18	143	93	71	48	524,60	17500
17,80	18	143	93	71	48	524,60	17800
18,00	18	143	93	71	48	524,60	18000
18,50	20	153	101	77	50	617,20	18500
18,80	20	153	101	77	50	617,20	18800
19,00	20	153	101	77	50	617,20	19000
19,50	20	153	101	77	50	617,20	19500
19,80	20	153	101	77	50	617,20	19800
20,00	20	153	101	77	50	617,20	20000

P	●
M	●
K	●
N	○
S	
H	
O	

→ v_c Page 116

WTX – High Speed Drill, DIN 6537

▲ Four fluted high-feed drill
▲ Specially designed for steel and cast iron machining
▲ Has four spiral coolant holes
▲ Innovative cutting edge geometry guarantees high positioning accuracy
▲ Outstanding drilling quality in terms of tolerance, surface finish and position



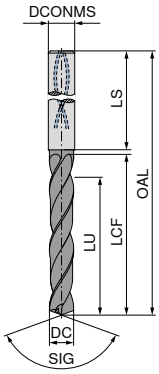

HFDS

DPX14S

DRAGONSKIN

SIG 130°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 798 ... EUR T4	
14,0	16	142	91	73	48	378,40	14000
14,3	16	142	91	73	48	473,50	14300
14,5	16	142	91	73	48	473,50	14500
15,0	18	142	91	73	48	473,50	15000
16,0	18	142	91	73	48	473,50	16000

P	●
M	○
K	●
N	○
S	
H	
O	○

→ v_c Page 125

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 798 ... EUR T4	
6,0	8	89	51	40	36	114,70	06000
6,1	10	102	59	47	40	133,80	06100
6,2	10	102	59	47	40	133,80	06200
6,3	10	102	59	47	40	133,80	06300
6,4	10	102	59	47	40	133,80	06400
6,5	10	102	59	47	40	133,80	06500
6,6	10	102	59	47	40	133,80	06600
6,7	10	102	59	47	40	133,80	06700
6,8	10	102	59	47	40	133,80	06800
6,9	10	102	59	47	40	133,80	06900
7,0	10	102	59	47	40	133,80	07000
7,1	10	102	59	47	40	133,80	07100
7,2	10	102	59	47	40	133,80	07200
7,3	10	102	59	47	40	133,80	07300
7,4	10	102	59	47	40	133,80	07400
7,5	10	102	59	47	40	133,80	07500
7,6	10	102	59	47	40	133,80	07600
7,7	10	102	59	47	40	133,80	07700
7,8	10	102	59	47	40	133,80	07800
7,9	10	102	59	47	40	133,80	07900
8,0	10	102	59	47	40	133,80	08000
8,1	12	118	70	55	45	205,90	08100
8,2	12	118	70	55	45	205,90	08200
8,3	12	118	70	55	45	205,90	08300
8,4	12	118	70	55	45	205,90	08400
8,5	12	118	70	55	45	205,90	08500
8,6	12	118	70	55	45	205,90	08600
8,7	12	118	70	55	45	205,90	08700
8,8	12	118	70	55	45	205,90	08800
8,9	12	118	70	55	45	205,90	08900
9,0	12	118	70	55	45	205,90	09000
9,1	12	118	70	55	45	205,90	09100
9,2	12	118	70	55	45	205,90	09200
9,3	12	118	70	55	45	205,90	09300
9,4	12	118	70	55	45	205,90	09400
9,5	12	118	70	55	45	205,90	09500
9,6	12	118	70	55	45	205,90	09600
9,7	12	118	70	55	45	205,90	09700
9,8	12	118	70	55	45	205,90	09800
9,9	12	118	70	55	45	205,90	09900
10,0	12	118	70	55	45	205,90	10000
10,2	14	124	76	60	45	279,50	10200
10,5	14	124	76	60	45	279,50	10500
11,0	14	124	76	60	45	279,50	11000
11,5	14	124	76	60	45	279,50	11500
12,0	14	124	76	60	45	279,50	12000
12,5	16	142	91	73	48	378,40	12500
13,0	16	142	91	73	48	378,40	13000

WTX – High Performance Drill, factory standard



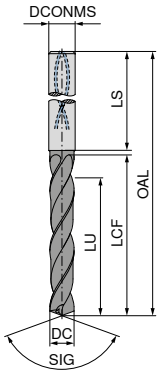

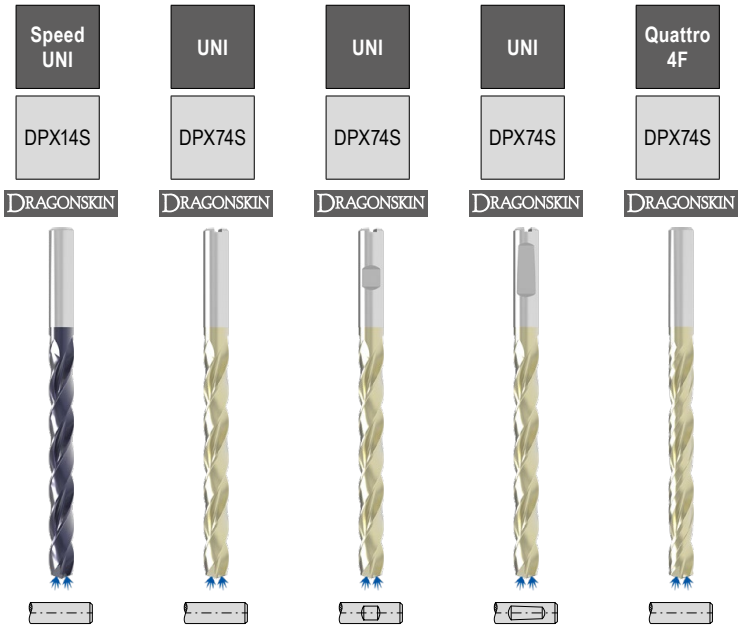

						SIG 145° Solid carbide	SIG 135° Solid carbide	SIG 135° Solid carbide	SIG 135° Solid carbide	SIG 140° Solid carbide
						10 782 ...	11 789 ...	11 790 ...	11 788 ...	10 736 ...
DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4	EUR T7	EUR T7	EUR T7	EUR T4
3,00	6	72	34	29	36	181,10 03000	159,50 030	159,50 030	159,50 030	169,60 03000
3,10	6	72	34	29	36	181,10 03100	159,50 031	159,50 031	159,50 031	169,60 03100
3,20	6	72	34	29	36	181,10 03200	159,50 032	159,50 032	159,50 032	169,60 03200
3,30	6	72	34	29	36	181,10 03300	159,50 033	159,50 033	159,50 033	169,60 03300
3,40	6	72	34	29	36	181,10 03400	159,50 034	159,50 034	159,50 034	169,60 03400
3,50	6	72	34	29	36	181,10 03500	159,50 035	159,50 035	159,50 035	169,60 03500
3,60	6	72	34	29	36	181,10 03600	159,50 036	159,50 036	159,50 036	169,60 03600
3,70	6	72	34	29	36	181,10 03700	159,50 037	159,50 037	159,50 037	169,60 03700
3,80	6	81	43	36	36	181,10 03800	159,50 038	159,50 038	159,50 038	169,60 03800
3,90	6	81	43	36	36	181,10 03900	159,50 039	159,50 039	159,50 039	169,60 03900
4,00	6	81	43	36	36	181,10 04000	159,50 040	159,50 040	159,50 040	169,60 04000
4,10	6	81	43	36	36	181,10 04100	159,50 041	159,50 041	159,50 041	169,60 04100
4,20	6	81	43	36	36	181,10 04200	159,50 042	159,50 042	159,50 042	169,60 04200
4,30	6	81	43	36	36	181,10 04300	159,50 043	159,50 043	159,50 043	169,60 04300
4,40	6	81	43	36	36	181,10 04400	159,50 044	159,50 044	159,50 044	169,60 04400
4,50	6	81	43	36	36	181,10 04500	159,50 045	159,50 045	159,50 045	169,60 04500
4,60	6	81	43	36	36	181,10 04600	159,50 046	159,50 046	159,50 046	169,60 04600
4,65	6	81	43	36	36	181,10 04650				
4,70	6	81	43	36	36	181,10 04700	159,50 047	159,50 047	159,50 047	169,60 04700
4,80	6	95	57	48	36	181,10 04800	159,50 048	159,50 048	159,50 048	169,60 04800
4,90	6	95	57	48	36	181,10 04900	159,50 049	159,50 049	159,50 049	169,60 04900
5,00	6	95	57	48	36	181,10 05000	159,50 050	159,50 050	159,50 050	169,60 05000
5,10	6	95	57	48	36	181,10 05100	159,50 051	159,50 051	159,50 051	169,60 05100
5,20	6	95	57	48	36	181,10 05200	159,50 052	159,50 052	159,50 052	169,60 05200
5,30	6	95	57	48	36	181,10 05300	159,50 053	159,50 053	159,50 053	169,60 05300
5,40	6	95	57	48	36	181,10 05400	159,50 054	159,50 054	159,50 054	169,60 05400
5,50	6	95	57	48	36	181,10 05500	159,50 055	159,50 055	159,50 055	169,60 05500
5,55	6	95	57	48	36	181,10 05550				
5,60	6	95	57	48	36	181,10 05600	159,50 056	159,50 056	159,50 056	169,60 05600
5,70	6	95	57	48	36	181,10 05700	159,50 057	159,50 057	159,50 057	169,60 05700
5,80	6	95	57	48	36	181,10 05800	159,50 058	159,50 058	159,50 058	169,60 05800
5,90	6	95	57	48	36	181,10 05900	159,50 059	159,50 059	159,50 059	169,60 05900
6,00	6	95	57	48	36	181,10 06000	159,50 060	159,50 060	159,50 060	169,60 06000
6,10	8	114	76	64	36	231,70 06100	201,40 061	201,40 061	201,40 061	202,80 06100
P						●	●	●	●	●
M						●				
K						●	●	●	●	●
N										
S										
H							○	○	○	○
O										

→ v_c Page 115–120

Ø DC_{m7} for Type UNI and Quattro 4F / Ø DC_{h7} for Type Speed UNI

Continued on next page

WTX – High Performance Drill, factory standard



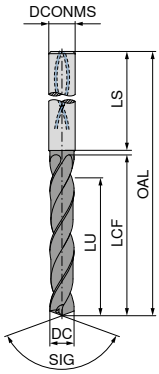

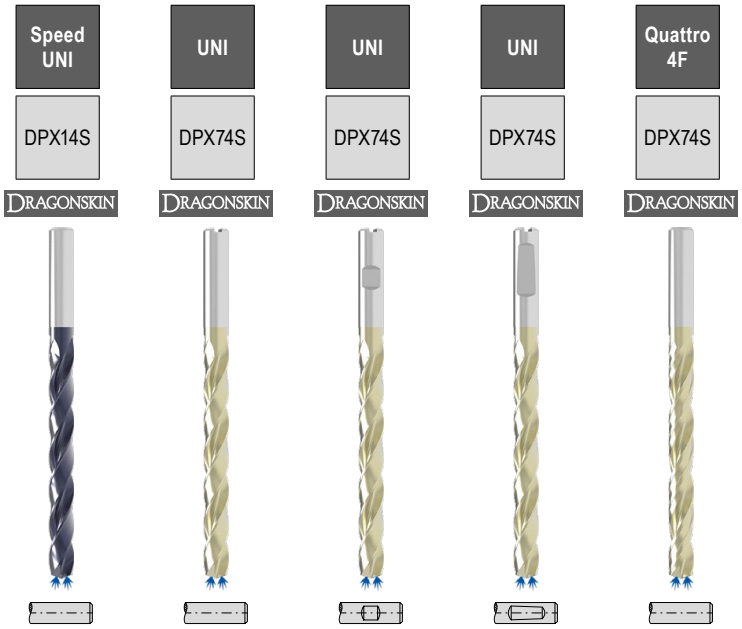

						SIG 145° Solid carbide	SIG 135° Solid carbide	SIG 135° Solid carbide	SIG 135° Solid carbide	SIG 140° Solid carbide
						10 782 ...	11 789 ...	11 790 ...	11 788 ...	10 736 ...
DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4	EUR T7	EUR T7	EUR T7	EUR T4
6,20	8	114	76	64	36	231,70 06200	201,40 062	201,40 062	201,40 062	202,80 06200
6,30	8	114	76	64	36	231,70 06300	201,40 063	201,40 063	201,40 063	202,80 06300
6,40	8	114	76	64	36	231,70 06400	201,40 064	201,40 064	201,40 064	202,80 06400
6,50	8	114	76	64	36	231,70 06500	201,40 065	201,40 065	201,40 065	202,80 06500
6,60	8	114	76	64	36	231,70 06600	201,40 066	201,40 066	201,40 066	202,80 06600
6,70	8	114	76	64	36	231,70 06700	201,40 067	201,40 067	201,40 067	202,80 06700
6,80	8	114	76	64	36	231,70 06800	201,40 068	201,40 068	201,40 068	202,80 06800
6,90	8	114	76	64	36	231,70 06900	201,40 069	201,40 069	201,40 069	202,80 06900
7,00	8	114	76	64	36	231,70 07000	201,40 070	201,40 070	201,40 070	202,80 07000
7,10	8	114	76	64	36	231,70 07100	201,40 071	201,40 071	201,40 071	202,80 07100
7,20	8	114	76	64	36	231,70 07200	201,40 072	201,40 072	201,40 072	202,80 07200
7,30	8	114	76	64	36	231,70 07300	201,40 073	201,40 073	201,40 073	202,80 07300
7,40	8	114	76	64	36	231,70 07400	201,40 074	201,40 074	201,40 074	202,80 07400
7,50	8	114	76	64	36	231,70 07500	201,40 075	201,40 075	201,40 075	202,80 07500
7,60	8	114	76	64	36	231,70 07600	201,40 076	201,40 076	201,40 076	202,80 07600
7,70	8	114	76	64	36	231,70 07700	201,40 077	201,40 077	201,40 077	202,80 07700
7,80	8	114	76	64	36	231,70 07800	201,40 078	201,40 078	201,40 078	202,80 07800
7,90	8	114	76	64	36	231,70 07900	201,40 079	201,40 079	201,40 079	202,80 07900
8,00	8	114	76	64	36	231,70 08000	201,40 080	201,40 080	201,40 080	202,80 08000
8,10	10	142	95	80	40	317,30 08100	276,60 081	276,60 081	276,60 081	292,50 08100
8,20	10	142	95	80	40	317,30 08200	276,60 082	276,60 082	276,60 082	292,50 08200
8,30	10	142	95	80	40	317,30 08300	276,60 083	276,60 083	276,60 083	292,50 08300
8,40	10	142	95	80	40	317,30 08400	276,60 084	276,60 084	276,60 084	292,50 08400
8,50	10	142	95	80	40	317,30 08500	276,60 085	276,60 085	276,60 085	292,50 08500
8,60	10	142	95	80	40	317,30 08600	276,60 086	276,60 086	276,60 086	292,50 08600
8,70	10	142	95	80	40	317,30 08700	276,60 087	276,60 087	276,60 087	292,50 08700
8,80	10	142	95	80	40	317,30 08800	276,60 088	276,60 088	276,60 088	292,50 08800
8,90	10	142	95	80	40	317,30 08900	276,60 089	276,60 089	276,60 089	292,50 08900
9,00	10	142	95	80	40	317,30 09000	276,60 090	276,60 090	276,60 090	292,50 09000
9,10	10	142	95	80	40	317,30 09100	276,60 091	276,60 091	276,60 091	292,50 09100
9,20	10	142	95	80	40	317,30 09200	276,60 092	276,60 092	276,60 092	292,50 09200
9,30	10	142	95	80	40	317,30 09300	276,60 093	276,60 093	276,60 093	292,50 09300
9,40	10	142	95	80	40	317,30 09400	276,60 094	276,60 094	276,60 094	292,50 09400
9,50	10	142	95	80	40	317,30 09500	276,60 095	276,60 095	276,60 095	292,50 09500
P						●	●	●	●	●
M						●				
K						●	●	●	●	●
N										
S										
H							○	○	○	○
O										

→ v_c Page 115–120

Ø DC_{m7} for Type UNI and Quattro 4F / Ø DC_{h7} for Type Speed UNI

Continued on next page

WTX – High Performance Drill, factory standard



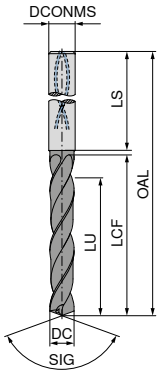

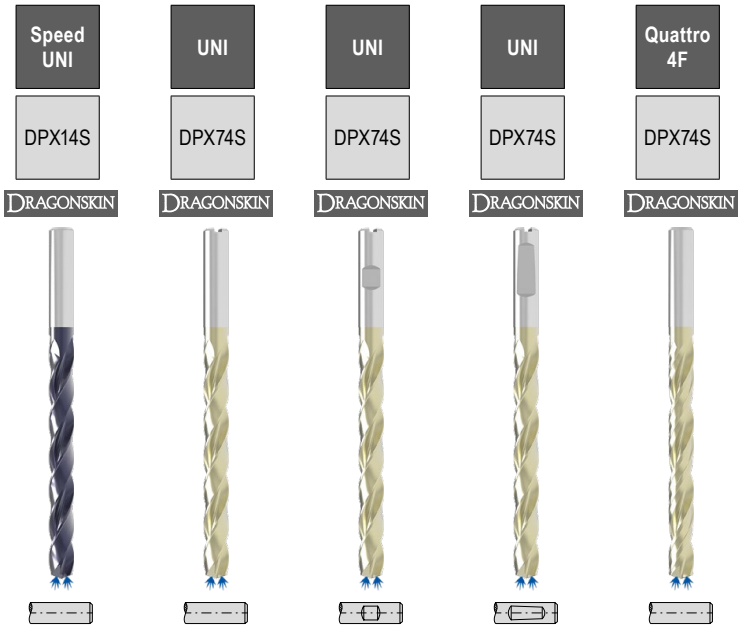

						SIG 145° Solid carbide		SIG 135° Solid carbide		SIG 135° Solid carbide		SIG 135° Solid carbide		SIG 140° Solid carbide	
						10 782 ...		11 789 ...		11 790 ...		11 788 ...		10 736 ...	
DC $_{m7/h7}$ mm	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4		EUR T7		EUR T7		EUR T7		EUR T4	
9,60	10	142	95	80	40	317,30	09600	276,60	096	276,60	096	276,60	096	292,50	09600
9,70	10	142	95	80	40	317,30	09700	276,60	097	276,60	097	276,60	097	292,50	09700
9,80	10	142	95	80	40	317,30	09800	276,60	098	276,60	098	276,60	098	292,50	09800
9,90	10	142	95	80	40	317,30	09900	276,60	099	276,60	099	276,60	099	292,50	09900
10,00	10	142	95	80	40	317,30	10000	276,60	100	276,60	100	276,60	100	292,50	10000
10,10	12	162	114	96	45	420,10	10100	366,40	101	366,40	101	366,40	101	375,30	10100
10,20	12	162	114	96	45	420,10	10200	366,40	102	366,40	102	366,40	102	375,30	10200
10,30	12	162	114	96	45	420,10	10300	366,40	103	366,40	103	366,40	103	375,30	10300
10,40	12	162	114	96	45	420,10	10400	366,40	104	366,40	104	366,40	104	375,30	10400
10,50	12	162	114	96	45	420,10	10500	366,40	105	366,40	105	366,40	105	375,30	10500
10,60	12	162	114	96	45	420,10	10600	366,40	106	366,40	106	366,40	106	375,30	10600
10,70	12	162	114	96	45	420,10	10700	366,40	107	366,40	107	366,40	107	375,30	10700
10,80	12	162	114	96	45	420,10	10800	366,40	108	366,40	108	366,40	108	375,30	10800
10,90	12	162	114	96	45	420,10	10900	366,40	109	366,40	109	366,40	109	375,30	10900
11,00	12	162	114	96	45	420,10	11000	366,40	110	366,40	110	366,40	110	375,30	11000
11,10	12	162	114	96	45	420,10	11100	366,40	111	366,40	111	366,40	111	375,30	11100
11,20	12	162	114	96	45	420,10	11200	366,40	112	366,40	112	366,40	112	375,30	11200
11,30	12	162	114	96	45	420,10	11300	366,40	113	366,40	113	366,40	113	375,30	11300
11,40	12	162	114	96	45	420,10	11400	366,40	114	366,40	114	366,40	114	375,30	11400
11,50	12	162	114	96	45	420,10	11500	366,40	115	366,40	115	366,40	115	375,30	11500
11,60	12	162	114	96	45	420,10	11600	366,40	116	366,40	116	366,40	116	375,30	11600
11,70	12	162	114	96	45	420,10	11700	366,40	117	366,40	117	366,40	117	375,30	11700
11,80	12	162	114	96	45	420,10	11800	366,40	118	366,40	118	366,40	118	375,30	11800
11,90	12	162	114	96	45	420,10	11900	366,40	119	366,40	119	366,40	119	375,30	11900
12,00	12	162	114	96	45	420,10	12000	366,40	120	366,40	120	366,40	120	375,30	12000
12,50	14	178	131	112	45	507,10	12500	444,60	125	444,60	125	444,60	125	450,50	12500
12,80	14	178	131	112	45	507,10	12800	444,60	128	444,60	128	444,60	128	450,50	12800
13,00	14	178	131	112	45	507,10	13000	444,60	130	444,60	130	444,60	130	450,50	13000
13,50	14	178	131	112	45	507,10	13500	444,60	135	444,60	135	444,60	135	450,50	13500
13,80	14	178	131	112	45	507,10	13800	444,60	138	444,60	138	444,60	138	450,50	13800
14,00	14	178	131	112	45	507,10	14000	444,60	140	444,60	140	444,60	140	450,50	14000
14,50	16	203	152	128	48	659,30	14500	576,50	145	576,50	145	576,50	145	608,50	14500
14,80	16	203	152	128	48	659,30	14800	576,50	148	576,50	148	576,50	148	608,50	14800
15,00	16	203	152	128	48	659,30	15000	576,50	150	576,50	150	576,50	150	608,50	15000
P						●		●		●		●		●	
M						●									
K						●		●		●		●		●	
N															
S															
H								○		○		○		○	
O															

→ v_c Page 115–120

Ø DC_{m7} for Type UNI and Quattro 4F / **Ø DC_{h7}** for Type Speed UNI

Continued on next page

WTX – High Performance Drill, factory standard



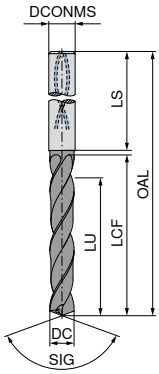

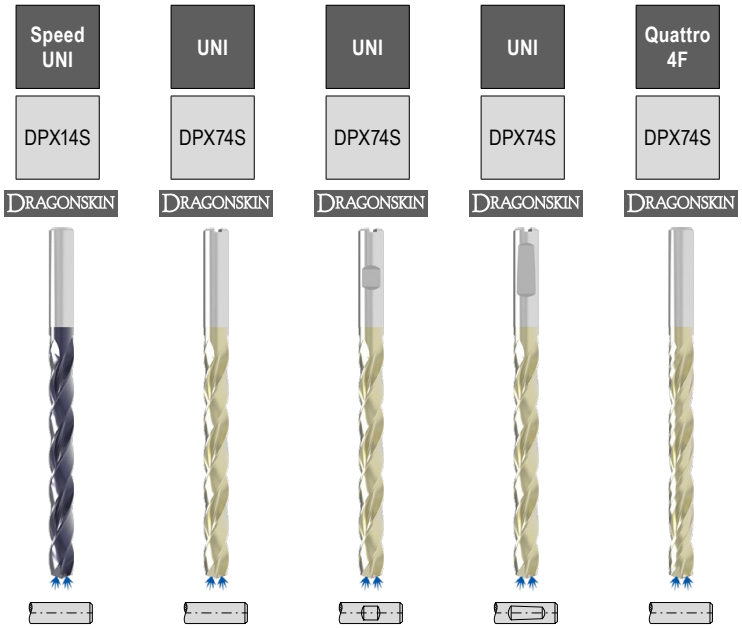

						SIG 145° Solid carbide		SIG 135° Solid carbide		SIG 135° Solid carbide		SIG 135° Solid carbide		SIG 140° Solid carbide	
						10 782 ...		**11 789 ...**		**11 790 ...**		**11 788 ...**		**10 736 ...**	
DC $_{m7/h7}$ **mm**	DCONMS $_{h6}$ mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4		EUR T7		EUR T7		EUR T7		EUR T4	
15,50	16	203	152	128	48	659,30	**15500**	576,50	**155**	576,50	**155**	576,50	**155**	608,50	**15500**
15,80	16	203	152	128	48	659,30	**15800**	576,50	**158**	576,50	**158**	576,50	**158**	608,50	**15800**
16,00	16	203	152	128	48	659,30	**16000**	576,50	**160**	576,50	**160**	576,50	**160**	608,50	**16000**
16,50	18	222	171	144	48	837,40	**16500**	725,60	**165**	725,60	**165**	725,60	**165**	851,80	**16500**
16,80	18	222	171	144	48	837,40	**16800**	725,60	**168**	725,60	**168**	725,60	**168**	851,80	**16800**
17,00	18	222	171	144	48	837,40	**17000**	725,60	**170**	725,60	**170**	725,60	**170**	851,80	**17000**
17,50	18	222	171	144	48	837,40	**17500**	725,60	**175**	725,60	**175**	725,60	**175**	851,80	**17500**
17,80	18	222	171	144	48	837,40	**17800**	725,60	**178**	725,60	**178**	725,60	**178**	851,80	**17800**
18,00	18	222	171	144	48	837,40	**18000**	725,60	**180**	725,60	**180**	725,60	**180**	851,80	**18000**
18,50	20	243	190	160	50			846,10	**185**	846,10	**185**	846,10	**185**		
18,80	20	243	190	160	50			846,10	**188**	846,10	**188**	846,10	**188**		
19,00	20	243	190	160	50			846,10	**190**	846,10	**190**	846,10	**190**		
19,50	20	243	190	160	50			846,10	**195**	846,10	**195**	846,10	**195**		
19,80	20	243	190	160	50			846,10	**198**	846,10	**198**	846,10	**198**		
20,00	20	243	190	160	50			846,10	**200**	846,10	**200**	846,10	**200**		
P						●		●		●		●		●	
M						●									
K						●		●		●		●		●	
N															
S															
H								○		○		○		○	
O															

→ v_c Page 115–120

Ø DC_{m7} for Type UNI and Quattro 4F / **Ø DC_{h7}** for Type Speed UNI

High Performance Drill, factory standard



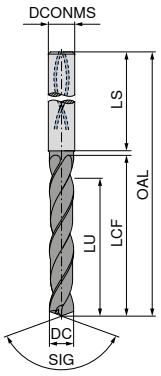

UNI

TiAlN

SIG 135°
Solid carbide

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 704 ... EUR T1/9C	
3,0	6	72	34	29,5	36	89,47	03000
3,1	6	72	34	29,3	36	89,47	03100
3,2	6	72	34	29,2	36	89,47	03200
3,3	6	72	34	29,0	36	89,47	03300
3,4	6	72	34	28,9	36	89,47	03400
3,5	6	72	34	28,7	36	89,47	03500
3,6	6	72	34	28,6	36	89,47	03600
3,7	6	72	34	28,4	36	89,47	03700
3,8	6	81	43	37,3	36	89,47	03800
3,9	6	81	43	37,1	36	89,47	03900
4,0	6	81	43	37,0	36	89,47	04000
4,1	6	81	43	36,8	36	89,47	04100
4,2	6	81	43	36,7	36	89,47	04200
4,3	6	81	43	36,5	36	89,47	04300
4,4	6	81	43	36,4	36	89,47	04400
4,5	6	81	43	36,2	36	89,47	04500
4,6	6	81	43	36,1	36	89,47	04600
4,7	6	81	43	35,9	36	89,47	04700
4,8	6	95	57	49,8	36	89,47	04800
4,9	6	95	57	49,6	36	89,47	04900
5,0	6	95	57	49,5	36	89,47	05000
5,1	6	95	57	49,3	36	89,47	05100
5,2	6	95	57	49,2	36	89,47	05200
5,3	6	95	57	49,0	36	89,47	05300
5,4	6	95	57	48,9	36	89,47	05400
5,5	6	95	57	48,7	36	89,47	05500
5,6	6	95	57	48,6	36	89,47	05600
5,7	6	95	57	48,4	36	89,47	05700
5,8	6	95	57	48,3	36	89,47	05800
5,9	6	95	57	48,1	36	89,47	05900
6,0	6	95	57	48,0	36	89,47	06000
6,1	8	114	76	66,8	36	110,30	06100
6,2	8	114	76	66,7	36	110,30	06200
6,3	8	114	76	66,5	36	110,30	06300
6,4	8	114	76	66,4	36	110,30	06400
6,5	8	114	76	66,2	36	110,30	06500
6,6	8	114	76	66,1	36	110,30	06600
6,7	8	114	76	65,9	36	110,30	06700
6,8	8	114	76	65,8	36	110,30	06800
6,9	8	114	76	65,6	36	110,30	06900
7,0	8	114	76	65,5	36	110,30	07000
7,1	8	114	76	65,3	36	110,30	07100
7,2	8	114	76	65,2	36	110,30	07200
7,3	8	114	76	65,0	36	110,30	07300
7,4	8	114	76	64,9	36	110,30	07400
7,5	8	114	76	64,7	36	110,30	07500
7,6	8	114	76	64,6	36	110,30	07600
7,7	8	114	76	64,4	36	110,30	07700
7,8	8	114	76	64,3	36	110,30	07800
7,9	8	114	76	64,1	36	110,30	07900
8,0	8	114	76	64,0	36	110,30	08000
8,1	10	142	95	82,8	40	135,90	08100
8,2	10	142	95	82,7	40	135,90	08200
8,3	10	142	95	82,5	40	135,90	08300
8,4	10	142	95	82,4	40	135,90	08400
8,5	10	142	95	82,2	40	135,90	08500
8,6	10	142	95	82,1	40	135,90	08600
8,7	10	142	95	81,9	40	135,90	08700
8,8	10	142	95	81,8	40	135,90	08800
8,9	10	142	95	81,6	40	135,90	08900
9,0	10	142	95	81,5	40	135,90	09000
9,1	10	142	95	81,3	40	135,90	09100
9,2	10	142	95	81,2	40	135,90	09200
9,3	10	142	95	81,0	40	135,90	09300
9,4	10	142	95	80,9	40	135,90	09400
9,5	10	142	95	80,7	40	135,90	09500
9,6	10	142	95	80,6	40	135,90	09600
9,7	10	142	95	80,4	40	135,90	09700
9,8	10	142	95	80,3	40	135,90	09800
9,9	10	142	95	80,1	40	135,90	09900
10,0	10	142	95	80,0	40	135,90	10000
10,2	12	162	114	98,7	45	180,50	10200
10,5	12	162	114	98,2	45	180,50	10500
10,8	12	162	114	97,8	45	180,50	10800
11,0	12	162	114	97,5	45	180,50	11000
11,5	12	162	114	96,7	45	180,50	11500
11,8	12	162	114	96,3	45	180,50	11800
12,0	12	162	114	96,0	45	180,50	12000
12,2	14	178	131	112,7	45	270,60	12200
12,5	14	178	131	112,2	45	270,60	12500
12,7	14	178	131	111,9	45	270,60	12700
13,0	14	178	131	111,5	45	270,60	13000
13,5	14	178	131	110,7	45	270,60	13500
14,0	14	178	131	110,0	45	270,60	14000
14,5	16	203	152	130,2	48	353,60	14500
15,0	16	203	152	129,5	48	353,60	15000
15,5	16	203	152	128,7	48	353,60	15500
16,0	16	203	152	128,0	48	353,60	16000
16,5	18	222	171	146,2	48	458,10	16500
17,0	18	222	171	145,5	48	458,10	17000
17,5	18	222	171	144,7	48	458,10	17500
18,0	18	222	171	144,0	48	458,10	18000
18,5	20	243	190	162,2	50	510,10	18500
19,0	20	243	190	161,5	50	510,10	19000
19,5	20	243	190	160,7	50	510,10	19500
20,0	20	243	190	160,0	50	510,10	20000

	11 704 ...
P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 130

WTX – High Performance Drill, factory standard



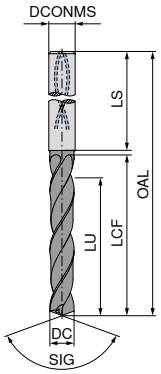

VA
Ti700

AL
DLC
DRAGONSKIN

SIG 140°
Solid carbide

SIG 135°
Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 770 ... EUR T4		10 792 ... EUR T4/9F	
3,0	6	72	34	29	36	214,40	030	166,60	03000
3,1	6	72	34	29	36	214,40	031	166,60	03100
3,2	6	72	34	29	36	214,40	032	166,60	03200
3,3	6	72	34	29	36	214,40	033	166,60	03300
3,4	6	72	34	29	36	214,40	034	166,60	03400
3,5	6	72	34	29	36	214,40	035	166,60	03500
3,6	6	72	34	29	36	214,40	036	166,60	03600
3,7	6	72	34	29	36	214,40	037	166,60	03700
3,8	6	81	43	36	36	214,40	038	166,60	03800
3,9	6	81	43	36	36	214,40	039	166,60	03900
4,0	6	81	43	36	36	214,40	040	166,60	04000
4,1	6	81	43	36	36	214,40	041	166,60	04100
4,2	6	81	43	36	36	214,40	042	166,60	04200
4,3	6	81	43	36	36	214,40	043	166,60	04300
4,4	6	81	43	36	36	214,40	044	166,60	04400
4,5	6	81	43	36	36	214,40	045	166,60	04500
4,6	6	81	43	36	36	214,40	046	166,60	04600
4,7	6	81	43	36	36	214,40	047	166,60	04700
4,8	6	95	57	48	36	214,40	048	166,60	04800
4,9	6	95	57	48	36	214,40	049	166,60	04900
5,0	6	95	57	48	36	214,40	050	166,60	05000
5,1	6	95	57	48	36	214,40	051	166,60	05100
5,2	6	95	57	48	36	214,40	052	166,60	05200
5,3	6	95	57	48	36	214,40	053	166,60	05300
5,4	6	95	57	48	36	214,40	054	166,60	05400
5,5	6	95	57	48	36	214,40	055	166,60	05500
5,6	6	95	57	48	36	214,40	056	166,60	05600
5,7	6	95	57	48	36	214,40	057	166,60	05700
5,8	6	95	57	48	36	214,40	058	166,60	05800
5,9	6	95	57	48	36	214,40	059	166,60	05900
6,0	6	95	57	48	36	214,40	060	166,60	06000
6,1	8	114	76	64	36	258,00	061	208,50	06100
6,2	8	114	76	64	36	258,00	062	208,50	06200
6,3	8	114	76	64	36	258,00	063	208,50	06300
6,4	8	114	76	64	36	258,00	064	208,50	06400
6,5	8	114	76	64	36	258,00	065	208,50	06500
6,6	8	114	76	64	36	258,00	066	208,50	06600
6,7	8	114	76	64	36	258,00	067	208,50	06700
6,8	8	114	76	64	36	258,00	068	208,50	06800
6,9	8	114	76	64	36	258,00	069	208,50	06900
7,0	8	114	76	64	36	258,00	070	208,50	07000
7,1	8	114	76	64	36	258,00	071	208,50	07100
7,2	8	114	76	64	36	258,00	072	208,50	07200
7,3	8	114	76	64	36	258,00	073	208,50	07300
7,4	8	114	76	64	36	258,00	074	208,50	07400

P	○	
M	●	
K	○	
N	○	●
S	●	
H		
O		

→ v_c Page 113+123

Ø DC_{m7} for Type VA / Ø DC_{h7} for Type AL

Continued on next page

WTX – High Performance Drill, factory standard



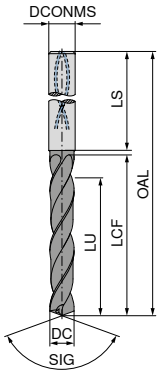

VA | Ti700

AL | DLC

DRAGONSKIN

SIG 140°
Solid carbide

SIG 135°
Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 770 ... EUR T4		10 792 ... EUR T4/9F	
7,5	8	114	76	64	36	258,00	075	208,50	07500
7,6	8	114	76	64	36	258,00	076	208,50	07600
7,7	8	114	76	64	36	258,00	077	208,50	07700
7,8	8	114	76	64	36	258,00	078	208,50	07800
7,9	8	114	76	64	36	258,00	079	208,50	07900
8,0	8	114	76	64	36	258,00	080	208,50	08000
8,1	10	142	95	80	40	337,50	081	263,60	08100
8,2	10	142	95	80	40	337,50	082	263,60	08200
8,3	10	142	95	80	40	337,50	083	263,60	08300
8,4	10	142	95	80	40	337,50	084	263,60	08400
8,5	10	142	95	80	40	337,50	085	263,60	08500
8,6	10	142	95	80	40	337,50	086	263,60	08600
8,7	10	142	95	80	40	337,50	087	263,60	08700
8,8	10	142	95	80	40	337,50	088	263,60	08800
8,9	10	142	95	80	40	337,50	089	263,60	08900
9,0	10	142	95	80	40	337,50	090	263,60	09000
9,1	10	142	95	80	40	337,50	091	263,60	09100
9,2	10	142	95	80	40	337,50	092	263,60	09200
9,3	10	142	95	80	40	337,50	093	263,60	09300
9,4	10	142	95	80	40	337,50	094	263,60	09400
9,5	10	142	95	80	40	337,50	095	263,60	09500
9,6	10	142	95	80	40	337,50	096	263,60	09600
9,7	10	142	95	80	40	337,50	097	263,60	09700
9,8	10	142	95	80	40	337,50	098	263,60	09800
9,9	10	142	95	80	40	337,50	099	263,60	09900
10,0	10	142	95	80	40	337,50	100	263,60	10000
10,1	12	162	114	96	45	434,50	101		
10,2	12	162	114	96	45	434,50	102	339,00	10200
10,3	12	162	114	96	45	434,50	103	339,00	10300
10,4	12	162	114	96	45	434,50	104	339,00	10400
10,5	12	162	114	96	45	434,50	105	339,00	10500
10,6	12	162	114	96	45	434,50	106		
10,7	12	162	114	96	45	434,50	107	339,00	10700
10,8	12	162	114	96	45	434,50	108	339,00	10800
10,9	12	162	114	96	45	434,50	109		
11,0	12	162	114	96	45	434,50	110	339,00	11000
11,1	12	162	114	96	45	434,50	111		
11,2	12	162	114	96	45	434,50	112	339,00	11200
11,3	12	162	114	96	45	434,50	113		
11,4	12	162	114	96	45	434,50	114		
11,5	12	162	114	96	45	434,50	115	339,00	11500
11,6	12	162	114	96	45	434,50	116	339,00	11600
11,7	12	162	114	96	45	434,50	117		
11,8	12	162	114	96	45	434,50	118	339,00	11800
11,9	12	162	114	96	45	434,50	119		

P	○	
M	●	
K	○	
N	○	●
S	●	
H		
O		

→ v_c Page 113+123

Ø DC_{m7} for Type VA / Ø DC_{h7} for Type AL

Continued on next page

WTX – High Performance Drill, factory standard



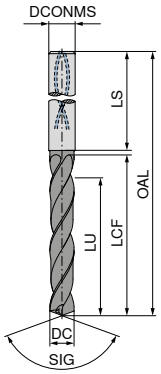

VA
Ti700

AL
DLC
DRAGONSKIN

SIG 140°
Solid carbide

SIG 135°
Solid carbide

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 770 ... EUR T4		10 792 ... EUR T4/9F	
12,0	12	162	114	96	45	434,50	120	339,00	12000
12,2	14	178	131	112	45			430,20	12200
12,5	14	178	133	112	45	562,20	125		
12,5	14	178	131	112	45			430,20	12500
12,8	14	178	133	112	45	562,20	128		
12,8	14	178	131	112	45			430,20	12800
13,0	14	178	133	112	45	562,20	130		
13,0	14	178	131	112	45			430,20	13000
13,2	14	178	131	112	45			430,20	13200
13,5	14	178	131	112	45			430,20	13500
13,5	14	178	133	112	45	562,20	135		
13,8	14	178	131	112	45			430,20	13800
13,8	14	178	133	112	45	562,20	138		
14,0	14	178	133	112	45	562,20	140		
14,0	14	178	131	112	45			430,20	14000
14,2	16	203	152	128	48			614,30	14200
14,5	16	203	152	128	48	722,90	145	614,30	14500
14,8	16	203	152	128	48	722,90	148	614,30	14800
15,0	16	203	152	128	48	722,90	150	614,30	15000
15,2	16	203	152	128	48			614,30	15200
15,5	16	203	152	128	48	722,90	155	614,30	15500
15,8	16	203	152	128	48	722,90	158	614,30	15800
16,0	16	203	152	128	48	722,90	160	614,30	16000
16,2	18	222	171	144	48			753,30	16200
16,5	18	222	171	144	48	973,50	165	753,30	16500
16,8	18	222	171	144	48	973,50	168	753,30	16800
17,0	18	222	171	144	48	973,50	170	753,30	17000
17,2	18	222	171	144	48			753,30	17200
17,5	18	222	171	144	48	973,50	175	753,30	17500
17,8	18	222	171	144	48	973,50	178	753,30	17800
18,0	18	222	171	144	48	973,50	180	753,30	18000
18,2	20	243	190	160	50			914,10	18200
18,5	20	243	190	160	50	1.276,00	185	914,10	18500
18,8	20	243	190	160	50	1.276,00	188	914,10	18800
19,0	20	243	190	160	50	1.276,00	190	914,10	19000
19,1	20	243	190	160	50			914,10	19100
19,2	20	243	190	160	50			914,10	19200
19,5	20	243	190	160	50	1.276,00	195	914,10	19500
19,8	20	243	190	160	50	1.276,00	198	914,10	19800
20,0	20	243	190	160	50	1.276,00	200	914,10	20000

P	○	
M	●	
K	○	
N	○	●
S	●	
H		
O		

→ v_c Page 113+123

Ø DC_{m7} for Type VA / Ø DC_{h7} for Type AL

WTX – High Feed Drill, factory standard

▲ Three fluted high-feed drill
▲ Universal application
▲ High positioning accuracy
▲ Suitable for difficult drilling applications





Feed UNI

DPX74S

DRAGONSKIN

SIG 135°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 794 ... EUR T4	
4,00	6	81	43	36	36	184,00	04000
4,10	6	81	43	36	36	184,00	04100
4,20	6	81	43	36	36	184,00	04200
4,30	6	81	43	36	36	184,00	04300
4,40	6	81	43	36	36	184,00	04400
4,50	6	81	43	36	36	184,00	04500
4,60	6	81	43	36	36	184,00	04600
4,70	6	81	43	36	36	184,00	04700
4,80	6	95	57	48	36	184,00	04800
4,90	6	95	57	48	36	184,00	04900
5,00	6	95	57	48	36	184,00	05000
5,10	6	95	57	48	36	184,00	05100
5,20	6	95	57	48	36	184,00	05200
5,30	6	95	57	48	36	184,00	05300
5,40	6	95	57	48	36	184,00	05400
5,50	6	95	57	48	36	184,00	05500
5,55	6	95	57	48	36	184,00	05550
5,60	6	95	57	48	36	184,00	05600
5,70	6	95	57	48	36	184,00	05700
5,80	6	95	57	48	36	184,00	05800
5,90	6	95	57	48	36	184,00	05900
6,00	6	95	57	48	36	184,00	06000
6,10	8	114	76	64	36	236,10	06100
6,20	8	114	76	64	36	236,10	06200
6,30	8	114	76	64	36	236,10	06300
6,40	8	114	76	64	36	236,10	06400
6,50	8	114	76	64	36	236,10	06500
6,60	8	114	76	64	36	236,10	06600
6,70	8	114	76	64	36	236,10	06700
6,80	8	114	76	64	36	236,10	06800
6,90	8	114	76	64	36	236,10	06900
7,00	8	114	76	64	36	236,10	07000
7,10	8	114	76	64	36	236,10	07100
7,20	8	114	76	64	36	236,10	07200
7,30	8	114	76	64	36	236,10	07300
7,40	8	114	76	64	36	236,10	07400
7,50	8	114	76	64	36	236,10	07500
7,60	8	114	76	64	36	236,10	07600
7,70	8	114	76	64	36	236,10	07700
7,80	8	114	76	64	36	236,10	07800
7,90	8	114	76	64	36	236,10	07900
8,00	8	114	76	64	36	236,10	08000
8,10	10	142	95	80	40	324,60	08100
8,20	10	142	95	80	40	324,60	08200
8,30	10	142	95	80	40	324,60	08300
8,40	10	142	95	80	40	324,60	08400
8,50	10	142	95	80	40	324,60	08500
8,60	10	142	95	80	40	324,60	08600
8,70	10	142	95	80	40	324,60	08700
8,80	10	142	95	80	40	324,60	08800
8,90	10	142	95	80	40	324,60	08900
9,00	10	142	95	80	40	324,60	09000
9,10	10	142	95	80	40	324,60	09100
9,20	10	142	95	80	40	324,60	09200
9,30	10	142	95	80	40	324,60	09300
9,40	10	142	95	80	40	324,60	09400
9,50	10	142	95	80	40	324,60	09500
9,60	10	142	95	80	40	324,60	09600
9,70	10	142	95	80	40	324,60	09700
9,80	10	142	95	80	40	324,60	09800
9,90	10	142	95	80	40	324,60	09900
10,00	10	142	95	80	40	324,60	10000
10,10	12	162	114	96	45	427,30	10100
10,20	12	162	114	96	45	427,30	10200
10,30	12	162	114	96	45	427,30	10300
10,40	12	162	114	96	45	427,30	10400
10,50	12	162	114	96	45	427,30	10500
10,60	12	162	114	96	45	427,30	10600
10,70	12	162	114	96	45	427,30	10700
10,80	12	162	114	96	45	427,30	10800
10,90	12	162	114	96	45	427,30	10900
11,00	12	162	114	96	45	427,30	11000
11,10	12	162	114	96	45	427,30	11100
11,20	12	162	114	96	45	427,30	11200
11,30	12	162	114	96	45	427,30	11300
11,40	12	162	114	96	45	427,30	11400
11,50	12	162	114	96	45	427,30	11500
11,60	12	162	114	96	45	427,30	11600
11,70	12	162	114	96	45	427,30	11700
11,80	12	162	114	96	45	427,30	11800
11,90	12	162	114	96	45	427,30	11900
12,00	12	162	114	96	45	427,30	12000
12,20	14	178	131	112	45	515,70	12200
12,50	14	178	131	112	45	515,70	12500
12,80	14	178	131	112	45	515,70	12800
13,00	14	178	131	112	45	515,70	13000
13,50	14	178	131	112	45	515,70	13500
13,80	14	178	131	112	45	515,70	13800
14,00	14	178	131	112	45	515,70	14000
14,50	16	203	152	128	48	673,50	14500
14,80	16	203	152	128	48	673,50	14800
15,00	16	203	152	128	48	673,50	15000
15,50	16	203	152	128	48	673,50	15500
15,80	16	203	152	128	48	673,50	15800
16,00	16	203	152	128	48	673,50	16000
16,50	18	222	171	144	48	866,50	16500
16,80	18	222	171	144	48	866,50	16800
17,00	18	222	171	144	48	866,50	17000
17,50	18	222	171	144	48	866,50	17500
17,80	18	222	171	144	48	866,50	17800
18,00	18	222	171	144	48	866,50	18000
18,50	20	243	190	160	50	1.058,00	18500
18,80	20	243	190	160	50	1.058,00	18800
19,00	20	243	190	160	50	1.058,00	19000
19,50	20	243	190	160	50	1.058,00	19500
19,80	20	243	190	160	50	1.058,00	19800
20,00	20	243	190	160	50	1.058,00	20000

P	●
M	●
K	●
N	○
S	
H	
O	

→ v_c Page 117

WTX – High Performance Drill, factory standard



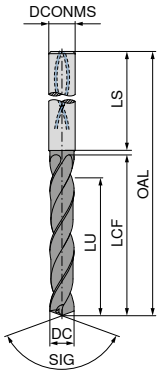

DC h7/m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	SIG 135° Solid carbide 10 774 ... EUR T4		SIG 140° Solid carbide 10 737 ... EUR T4		SIG 135° Solid carbide 10 793 ... EUR T4/9F	
3,0	6	92	54	48	36	234,00	03000	233,30	03000	201,40	03000
3,1	6	92	54	48	36	234,00	03100	233,30	03100	201,40	03100
3,2	6	92	54	48	36	234,00	03200	233,30	03200	201,40	03200
3,3	6	92	54	48	36	234,00	03300	233,30	03300	201,40	03300
3,4	6	92	54	48	36	234,00	03400	233,30	03400	201,40	03400
3,5	6	92	54	48	36	234,00	03500	233,30	03500	201,40	03500
3,6	6	92	54	48	36	234,00	03600	233,30	03600	201,40	03600
3,7	6	92	54	48	36	234,00	03700	233,30	03700	201,40	03700
3,8	6	102	64	58	36	234,00	03800	233,30	03800	201,40	03800
3,9	6	102	64	58	36	234,00	03900	233,30	03900	201,40	03900
4,0	6	102	64	58	36	234,00	04000	233,30	04000	201,40	04000
4,1	6	102	64	58	36	234,00	04100	233,30	04100	201,40	04100
4,2	6	102	64	58	36	234,00	04200	233,30	04200	201,40	04200
4,3	6	102	64	58	36	234,00	04300	233,30	04300	201,40	04300
4,4	6	102	64	58	36	234,00	04400	233,30	04400	201,40	04400
4,5	6	102	64	58	36	234,00	04500	233,30	04500	201,40	04500
4,6	6	102	64	58	36	234,00	04600	233,30	04600	201,40	04600
4,7	6	102	64	58	36	234,00	04700	233,30	04700	201,40	04700
4,8	6	116	78	70	36	234,00	04800	233,30	04800	201,40	04800
4,9	6	116	78	70	36	234,00	04900	233,30	04900	201,40	04900
5,0	6	116	78	70	36	234,00	05000	233,30	05000	201,40	05000
5,1	6	116	78	70	36	234,00	05100	233,30	05100	201,40	05100
5,2	6	116	78	70	36	234,00	05200	233,30	05200	201,40	05200
5,3	6	116	78	70	36	234,00	05300	233,30	05300	201,40	05300
5,4	6	116	78	70	36	234,00	05400	233,30	05400	201,40	05400
5,5	6	116	78	70	36	234,00	05500	233,30	05500	201,40	05500
5,6	6	116	78	70	36	234,00	05600	233,30	05600	201,40	05600
5,7	6	116	78	70	36	234,00	05700	233,30	05700	201,40	05700
5,8	6	116	78	70	36	234,00	05800	233,30	05800	201,40	05800
5,9	6	116	78	70	36	234,00	05900	233,30	05900	201,40	05900
6,0	6	116	78	70	36	234,00	06000	233,30	06000	201,40	06000
6,1	8	146	108	94	36	268,70	06100	252,10	06100	279,60	06100
6,2	8	146	108	94	36	268,70	06200	252,10	06200	279,60	06200
6,3	8	146	108	94	36	268,70	06300	252,10	06300	279,60	06300
6,4	8	146	108	94	36	268,70	06400	252,10	06400	279,60	06400
6,5	8	146	108	94	36	268,70	06500	252,10	06500	279,60	06500
6,6	8	146	108	94	36	268,70	06600	252,10	06600	279,60	06600
6,7	8	146	108	94	36	268,70	06700	252,10	06700	279,60	06700
6,8	8	146	108	94	36	268,70	06800	252,10	06800	279,60	06800
6,9	8	146	108	94	36	268,70	06900	252,10	06900	279,60	06900
7,0	8	146	108	94	36	268,70	07000	252,10	07000	279,60	07000
7,1	8	146	108	94	36	268,70	07100	252,10	07100	279,60	07100
7,2	8	146	108	94	36	268,70	07200	252,10	07200	279,60	07200

P	●	●	
M	●		
K	●	●	
N	○		●
S	●		
H		○	
O			

→ v_c Page 118–124

Ø DC_{h7} for Type Speed VA and AL / Ø DC_{m7} for Type Quattro 4F

Continued on next page

WTX – High Performance Drill, factory standard



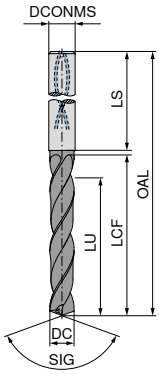

						SIG 135° Solid carbide		SIG 140° Solid carbide		SIG 135° Solid carbide	
						10 774 ...		10 737 ...		10 793 ...	
DC h7/m7	DCONMS h6	OAL	LCF	LU	LS	EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	T4		T4		T4/9F	
7,3	8	146	108	94	36	268,70	07300	252,10	07300	279,60	07300
7,4	8	146	108	94	36	268,70	07400	252,10	07400	279,60	07400
7,5	8	146	108	94	36	268,70	07500	252,10	07500	279,60	07500
7,6	8	146	108	94	36	268,70	07600	252,10	07600	279,60	07600
7,7	8	146	108	94	36	268,70	07700	252,10	07700	279,60	07700
7,8	8	146	108	94	36	268,70	07800	252,10	07800	279,60	07800
7,9	8	146	108	94	36	268,70	07900	252,10	07900	279,60	07900
8,0	8	146	108	94	36	268,70	08000	252,10	08000	279,60	08000
8,1	10	162	120	110	40	350,50	08100	343,50	08100	353,20	08100
8,2	10	162	120	110	40	350,50	08200	343,50	08200	353,20	08200
8,3	10	162	120	110	40	350,50	08300	343,50	08300	353,20	08300
8,4	10	162	120	110	40	350,50	08400	343,50	08400	353,20	08400
8,5	10	162	120	110	40	350,50	08500	343,50	08500	353,20	08500
8,6	10	162	120	110	40	350,50	08600	343,50	08600	353,20	08600
8,7	10	162	120	110	40	350,50	08700	343,50	08700	353,20	08700
8,8	10	162	120	110	40	350,50	08800	343,50	08800	353,20	08800
8,9	10	162	120	110	40	350,50	08900	343,50	08900	353,20	08900
9,0	10	162	120	110	40	350,50	09000	343,50	09000	353,20	09000
9,1	10	162	120	110	40	350,50	09100	343,50	09100	353,20	09100
9,2	10	162	120	110	40	350,50	09200	343,50	09200	353,20	09200
9,3	10	162	120	110	40	350,50	09300	343,50	09300	353,20	09300
9,4	10	162	120	110	40	350,50	09400	343,50	09400	353,20	09400
9,5	10	162	120	110	40	350,50	09500	343,50	09500	353,20	09500
9,6	10	162	120	110	40	350,50	09600	343,50	09600	353,20	09600
9,7	10	162	120	110	40	350,50	09700	343,50	09700	353,20	09700
9,8	10	162	120	110	40	350,50	09800	343,50	09800	353,20	09800
9,9	10	162	120	110	40	350,50	09900	343,50	09900	353,20	09900
10,0	10	162	120	110	40	350,50	10000	343,50	10000	353,20	10000
10,1	12	204	156	142	45	477,80	10100	459,10	10100		
10,2	12	204	156	142	45	477,80	10200	459,10	10200	480,90	10200
10,3	12	204	156	142	45	477,80	10300	459,10	10300		
10,4	12	204	156	142	45	477,80	10400	459,10	10400		
10,5	12	204	156	142	45	477,80	10500	459,10	10500	480,90	10500
10,6	12	204	156	142	45	477,80	10600	459,10	10600		
10,7	12	204	156	142	45	477,80	10700	459,10	10700	480,90	10700
10,8	12	204	156	142	45	477,80	10800	459,10	10800	480,90	10800
10,9	12	204	156	142	45	477,80	10900	459,10	10900		
11,0	12	204	156	142	45	477,80	11000	459,10	11000	480,90	11000
11,1	12	204	156	142	45	477,80	11100	459,10	11100		
11,2	12	204	156	142	45	477,80	11200	459,10	11200	480,90	11200
11,3	12	204	156	142	45	477,80	11300	459,10	11300	480,90	11300
11,4	12	204	156	142	45	477,80	11400	459,10	11400		
11,5	12	204	156	142	45	477,80	11500	459,10	11500	480,90	11500
P						●		●			
M						●					
K						●		●			
N						○				●	
S						●					
H								○			
O											

→ v_c Page 118–124

Ø DC_{h7} for Type Speed VA and AL / Ø DC_{m7} for Type Quattro 4F

Continued on next page

WTX – High Performance Drill, factory standard



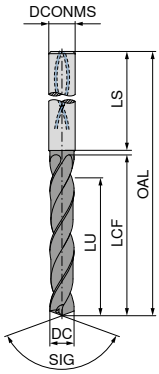

						SIG 135° Solid carbide		SIG 140° Solid carbide		SIG 135° Solid carbide	
						10 774 ...		10 737 ...		10 793 ...	
DC h7/m7	DCONMS h6	OAL	LCF	LU	LS	EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	T4		T4		T4/9F	
11,6	12	204	156	142	45	477,80	11600	459,10	11600		
11,7	12	204	156	142	45	477,80	11700	459,10	11700		
11,8	12	204	156	142	45	477,80	11800	459,10	11800	480,90	11800
11,9	12	204	156	142	45	477,80	11900	459,10	11900		
12,0	12	204	156	142	45	477,80	12000	459,10	12000	480,90	12000
12,1	14	230	182	166	45					675,20	12100
12,2	14	230	182	166	45	678,90	12200			675,20	12200
12,5	14	230	182	166	45	678,90	12500	673,50	12500	675,20	12500
12,8	14	230	182	166	45	678,90	12800	673,50	12800	675,20	12800
13,0	14	230	182	166	45	678,90	13000	673,50	13000	675,20	13000
13,2	14	230	182	166	45					675,20	13200
13,5	14	230	182	166	45	678,90	13500	673,50	13500	675,20	13500
13,8	14	230	182	166	45	678,90	13800	673,50	13800	675,20	13800
14,0	14	230	182	166	45	678,90	14000	673,50	14000	675,20	14000
14,2	16	260	208	192	48	871,10	14200			817,00	14200
14,5	16	260	208	192	48	871,10	14500	879,20	14500	817,00	14500
14,7	16	260	208	192	48					817,00	14700
14,8	16	260	208	192	48			879,20	14800	817,00	14800
15,0	16	260	208	192	48	871,10	15000	879,20	15000	817,00	15000
15,1	16	260	208	192	48	871,10	15100				
15,2	16	260	208	192	48	871,10	15200			817,00	15200
15,5	16	260	208	192	48	871,10	15500	879,20	15500	817,00	15500
15,7	16	260	208	192	48					817,00	15700
15,8	16	260	208	192	48	871,10	15800	879,20	15800	817,00	15800
16,0	16	260	208	192	48	871,10	16000	879,20	16000	817,00	16000
16,2	18	285	234	216	48					909,60	16200
16,5	18	285	234	216	48			1.192,00	16500	909,60	16500
16,8	18	285	234	216	48			1.192,00	16800	909,60	16800
17,0	18	285	234	216	48	1.198,00	17000	1.192,00	17000	909,60	17000
17,2	18	285	234	216	48					909,60	17200
17,5	18	285	234	216	48	1.198,00	17500	1.192,00	17500	909,60	17500
17,8	18	285	234	216	48			1.192,00	17800	909,60	17800
18,0	18	285	234	216	48			1.192,00	18000	909,60	18000
18,2	20	310	258	240	50					1.152,00	18200
18,5	20	310	258	240	50					1.152,00	18500
18,7	20	310	258	240	50					1.152,00	18700
18,8	20	310	258	240	50					1.152,00	18800
19,0	20	310	258	240	50					1.152,00	19000
19,2	20	310	258	240	50					1.152,00	19200
19,5	20	310	258	240	50					1.152,00	19500
19,8	20	310	258	240	50					1.152,00	19800
20,0	20	310	258	240	50					1.152,00	20000
P						●		●			
M						●					
K						●		●			
N						○					●
S						●					
H								○			
O											

→ v_c Page 118–124

Ø DC_{h7} for Type Speed VA and AL / Ø DC_{m7} for Type Quattro 4F

High Performance Drill, factory standard



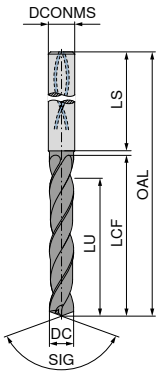

UNI

TiAlN

SIG 135°
Solid carbide

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	11 705 ... EUR T1/9C	
3,0	6	92	54	49,5	36	120,30	03000
3,1	6	92	54	49,3	36	120,30	03100
3,2	6	92	54	49,2	36	120,30	03200
3,3	6	92	54	49,0	36	120,30	03300
3,4	6	92	54	48,9	36	120,30	03400
3,5	6	92	54	48,7	36	120,30	03500
3,6	6	92	54	48,6	36	120,30	03600
3,7	6	92	54	48,4	36	120,30	03700
3,8	6	102	64	58,3	36	120,30	03800
3,9	6	102	64	58,1	36	120,30	03900
4,0	6	102	64	58,0	36	120,30	04000
4,1	6	102	64	57,8	36	120,30	04100
4,2	6	102	64	57,7	36	120,30	04200
4,3	6	102	64	57,5	36	120,30	04300
4,4	6	102	64	57,4	36	120,30	04400
4,5	6	102	64	57,2	36	120,30	04500
4,6	6	102	64	57,1	36	120,30	04600
4,7	6	102	64	56,9	36	120,30	04700
4,8	6	116	78	70,8	36	120,30	04800
4,9	6	116	78	70,6	36	120,30	04900
5,0	6	116	78	70,5	36	120,30	05000
5,1	6	116	78	70,3	36	120,30	05100
5,2	6	116	78	70,2	36	120,30	05200
5,3	6	116	78	70,0	36	120,30	05300
5,4	6	116	78	69,9	36	120,30	05400
5,5	6	116	78	69,7	36	120,30	05500
5,6	6	116	78	69,6	36	120,30	05600
5,7	6	116	78	69,4	36	120,30	05700
5,8	6	116	78	69,3	36	120,30	05800
5,9	6	116	78	69,1	36	120,30	05900
6,0	6	116	78	69,0	36	120,30	06000
6,1	8	146	108	98,8	36	133,50	06100
6,2	8	146	108	98,7	36	133,50	06200
6,3	8	146	108	98,5	36	133,50	06300
6,4	8	146	108	98,4	36	133,50	06400
6,5	8	146	108	98,2	36	133,50	06500
6,6	8	146	108	98,1	36	133,50	06600
6,7	8	146	108	97,9	36	133,50	06700
6,8	8	146	108	97,8	36	133,50	06800
6,9	8	146	108	97,6	36	133,50	06900
7,0	8	146	108	97,5	36	133,50	07000
7,1	8	146	108	97,3	36	133,50	07100
7,2	8	146	108	97,2	36	133,50	07200
7,3	8	146	108	97,0	36	133,50	07300
7,4	8	146	108	96,9	36	133,50	07400
7,5	8	146	108	96,7	36	133,50	07500
7,6	8	146	108	96,6	36	133,50	07600
7,7	8	146	108	96,4	36	133,50	07700
7,8	8	146	108	96,3	36	133,50	07800
7,9	8	146	108	96,1	36	133,50	07900
8,0	8	146	108	96,0	36	133,50	08000
8,1	10	162	120	107,8	40	187,70	08100
8,2	10	162	120	107,7	40	187,70	08200
8,3	10	162	120	107,5	40	187,70	08300
8,4	10	162	120	107,4	40	187,70	08400
8,5	10	162	120	107,2	40	187,70	08500
8,6	10	162	120	107,1	40	187,70	08600
8,7	10	162	120	106,9	40	187,70	08700
8,8	10	162	120	106,8	40	187,70	08800
8,9	10	162	120	106,6	40	187,70	08900
9,0	10	162	120	106,5	40	187,70	09000
9,1	10	162	120	106,3	40	187,70	09100
9,2	10	162	120	106,2	40	187,70	09200
9,3	10	162	120	106,0	40	187,70	09300
9,4	10	162	120	105,9	40	187,70	09400
9,5	10	162	120	105,7	40	187,70	09500
9,6	10	162	120	105,6	40	187,70	09600
9,7	10	162	120	105,4	40	187,70	09700
9,8	10	162	120	105,3	40	187,70	09800
9,9	10	162	120	105,1	40	187,70	09900
10,0	10	162	120	105,0	40	187,70	10000
10,2	12	204	156	140,7	45	258,60	10200
10,5	12	204	156	140,2	45	258,60	10500
10,8	12	204	156	139,8	45	258,60	10800
11,0	12	204	156	139,5	45	258,60	11000
11,5	12	204	156	138,7	45	258,60	11500
11,8	12	204	156	138,3	45	258,60	11800
12,0	12	204	156	138,0	45	258,60	12000
12,5	14	230	182	163,2	45	333,10	12500
12,7	14	230	182	162,9	45	333,10	12700
12,8	14	230	182	162,8	45	333,10	12800
13,0	14	230	182	162,5	45	333,10	13000
13,5	14	230	182	161,7	45	333,10	13500
13,8	14	230	182	161,3	45	333,10	13800
14,0	14	230	182	161,0	45	333,10	14000
14,5	16	260	208	186,2	48	439,00	14500
14,8	16	260	208	185,8	48	439,00	14800
15,0	16	260	208	185,5	48	439,00	15000
15,5	16	260	208	184,7	48	439,00	15500
15,8	16	260	208	184,3	48	439,00	15800
16,0	16	260	208	184,0	48	439,00	16000
16,5	18	285	234	209,2	48	524,30	16500
17,0	18	285	234	208,5	48	524,30	17000
17,5	18	285	234	207,7	48	524,30	17500
18,0	18	285	234	207,0	48	524,30	18000
18,5	20	310	258	230,2	50	524,30	18500
19,0	20	310	258	229,5	50	524,30	19000
19,5	20	310	258	228,7	50	524,30	19500
20,0	20	310	258	228,0	50	524,30	20000

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 131

WTX – High Feed Drill, factory standard

▲ Three fluted high-feed drill
▲ Universal application
▲ High positioning accuracy
▲ Suitable for difficult drilling applications

2





Feed UNI

DPX74S

DRAGONSKIN

SIG 135°

Solid carbide

DC m7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 796 ... EUR T4	
4,0	6	102	64	58	36	261,70	04000
4,1	6	102	64	58	36	261,70	04100
4,2	6	102	64	58	36	261,70	04200
4,3	6	102	64	58	36	261,70	04300
4,4	6	102	64	58	36	261,70	04400
4,5	6	102	64	58	36	261,70	04500
4,6	6	102	64	58	36	261,70	04600
4,7	6	102	64	58	36	261,70	04700
4,8	6	116	78	70	36	261,70	04800
4,9	6	116	78	70	36	261,70	04900
5,0	6	116	78	70	36	261,70	05000
5,1	6	116	78	70	36	261,70	05100
5,2	6	116	78	70	36	261,70	05200
5,3	6	116	78	70	36	261,70	05300
5,4	6	116	78	70	36	261,70	05400
5,5	6	116	78	70	36	261,70	05500
5,6	6	116	78	70	36	261,70	05600
5,7	6	116	78	70	36	261,70	05700
5,8	6	116	78	70	36	261,70	05800
5,9	6	116	78	70	36	261,70	05900
6,0	6	116	78	70	36	261,70	06000
6,1	8	146	108	94	36	337,00	06100
6,2	8	146	108	94	36	337,00	06200
6,3	8	146	108	94	36	337,00	06300
6,4	8	146	108	94	36	337,00	06400
6,5	8	146	108	94	36	337,00	06500
6,6	8	146	108	94	36	337,00	06600
6,7	8	146	108	94	36	337,00	06700
6,8	8	146	108	94	36	337,00	06800
6,9	8	146	108	94	36	337,00	06900
7,0	8	146	108	94	36	337,00	07000
7,1	8	146	108	94	36	337,00	07100
7,2	8	146	108	94	36	337,00	07200
7,3	8	146	108	94	36	337,00	07300
7,4	8	146	108	94	36	337,00	07400
7,5	8	146	108	94	36	337,00	07500
7,6	8	146	108	94	36	337,00	07600
7,7	8	146	108	94	36	337,00	07700
7,8	8	146	108	94	36	337,00	07800
7,9	8	146	108	94	36	337,00	07900
8,0	8	146	108	94	36	337,00	08000
8,1	10	162	120	110	40	439,10	08100
8,2	10	162	120	110	40	439,10	08200
8,3	10	162	120	110	40	439,10	08300
8,4	10	162	120	110	40	439,10	08400
8,5	10	162	120	110	40	439,10	08500
8,6	10	162	120	110	40	439,10	08600
8,7	10	162	120	110	40	439,10	08700
8,8	10	162	120	110	40	439,10	08800
8,9	10	162	120	110	40	439,10	08900
9,0	10	162	120	110	40	439,10	09000
9,1	10	162	120	110	40	439,10	09100
9,2	10	162	120	110	40	439,10	09200
9,3	10	162	120	110	40	439,10	09300
9,4	10	162	120	110	40	439,10	09400
9,5	10	162	120	110	40	439,10	09500
9,6	10	162	120	110	40	439,10	09600
9,7	10	162	120	110	40	439,10	09700
9,8	10	162	120	110	40	439,10	09800
9,9	10	162	120	110	40	439,10	09900
10,0	10	162	120	110	40	439,10	10000
10,1	12	204	156	142	45	572,80	10100
10,2	12	204	156	142	45	572,80	10200
10,3	12	204	156	142	45	572,80	10300
10,4	12	204	156	142	45	572,80	10400
10,5	12	204	156	142	45	572,80	10500
10,6	12	204	156	142	45	572,80	10600
10,7	12	204	156	142	45	572,80	10700
10,8	12	204	156	142	45	572,80	10800
10,9	12	204	156	142	45	572,80	10900
11,0	12	204	156	142	45	572,80	11000
11,1	12	204	156	142	45	572,80	11100
11,2	12	204	156	142	45	572,80	11200
11,3	12	204	156	142	45	572,80	11300
11,4	12	204	156	142	45	572,80	11400
11,5	12	204	156	142	45	572,80	11500
11,6	12	204	156	142	45	572,80	11600
11,7	12	204	156	142	45	572,80	11700
11,8	12	204	156	142	45	572,80	11800
11,9	12	204	156	142	45	572,80	11900
12,0	12	204	156	142	45	572,80	12000
12,2	14	230	182	166	45	734,10	12200
12,5	14	230	182	166	45	734,10	12500
12,8	14	230	182	166	45	734,10	12800
13,0	14	230	182	166	45	734,10	13000
13,5	14	230	182	166	45	734,10	13500
13,8	14	230	182	166	45	734,10	13800
14,0	14	230	182	166	45	734,10	14000
14,5	16	260	208	192	48	954,40	14500
14,8	16	260	208	192	48	954,40	14800
15,0	16	260	208	192	48	954,40	15000
15,5	16	260	208	192	48	954,40	15500
15,8	16	260	208	192	48	954,40	15800
16,0	16	260	208	192	48	954,40	16000
16,5	18	285	234	216	48	1.232,00	16500
16,8	18	285	234	216	48	1.232,00	16800
17,0	18	285	234	216	48	1.232,00	17000
17,5	18	285	234	216	48	1.232,00	17500
17,8	18	285	234	216	48	1.232,00	17800
18,0	18	285	234	216	48	1.232,00	18000
18,5	20	310	258	240	50	1.506,00	18500
18,8	20	310	258	240	50	1.506,00	18800
19,0	20	310	258	240	50	1.506,00	19000
19,5	20	310	258	240	50	1.506,00	19500
19,8	20	310	258	240	50	1.506,00	19800
20,0	20	310	258	240	50	1.506,00	20000

P	●
M	●
K	●
N	○
S	
H	
O	

→ v_c Page 117

WTX – Co-pilot deep hole twist drills

- ▲ Cutting tolerance j6 optimally coordinated as an intermediate tolerance between the pilot drill and deep hole twist drill
- ▲ For optimal guidance and reduction of the cutting time of the deep hole twist drill for hole depths > 30xD
- ▲ Pilot hole necessary
- ▲ up to 20xD without peck drilling
- ▲ Excellent alignment precision
- ▲ Reliable chip removal





SIG 137°
Solid carbide

11 018 ...

DC j6 mm	DCONMS h5 mm	OAL mm	LCF mm	LU mm	EUR T7/9G	
3,0	6	120	80	60	279,50	03000
4,0	6	130	90	80	291,00	04000
4,2	6	160	110	84	315,10	04200
4,5	6	160	110	90	315,10	04500
4,8	6	160	120	96	335,40	04800
5,0	6	160	120	100	335,40	05000
5,5	6	185	140	110	348,20	05500
5,8	6	185	140	116	348,20	05800
6,0	6	185	140	120	348,20	06000
6,5	8	210	160	130	397,60	06500
6,8	8	210	160	136	397,60	06800
7,0	8	210	160	140	397,60	07000
7,5	8	230	180	150	442,00	07500
7,8	8	230	180	156	442,00	07800
8,0	8	230	180	160	442,00	08000
8,5	10	260	195	170	487,90	08500
8,8	10	290	230	176	545,00	08800
9,0	10	290	230	180	545,00	09000

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c Page 142

Tolerances and angles

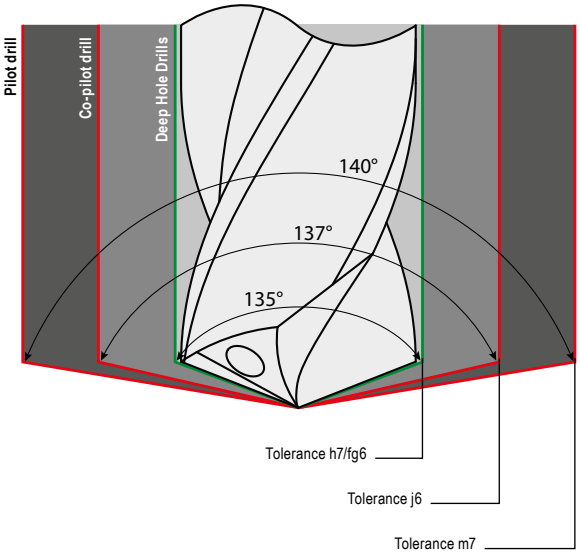

Tolerance table

ISO tolerances for shafts and holes

Tolerance designation	of Ø	3	6	10	18	
	up to and including	6	10	18	30	
p6		20	24	29	35	
		12	15	18	22	
h7		0	0	0	0	Deep hole twist drill 16xD to 30xD
		-12	-15	-18	-21	
j6		6	7	8	9	Co-pilot drill
		-2	-2	-3	-4	
fg6		-6	-8			Deep hole twist drill > 30xD
		-14	-17			
m6		12	15	18	21	
		4	6	7	8	
m7		16	21	25	29	WTX UNI / WTX VA
		4	6	7	8	

Pilot drill for WTX deep hole twist drill:

- ▲ WTX-TB UNI: WTX-UNI 3xD / 5xD
- ▲ WTX-TB ALU: WTX-VA 3xD / 5xD

WTX – High performance deep hole drills

- ▲ up to 16xD without peck drilling
- ▲ pilot hole necessary
- ▲ excellent alignment precision
- ▲ secure chip evacuation





SIG 135°
Solid carbide

11 016 ...

SIG 135°
Solid carbide

11 017 ...

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T7/9G		EUR T7/9G	
2,0	4	84	42	39	160,70	020	160,70	020
2,2	4	84	42	39	160,70	022	160,70	022
2,3	4	84	42	39	160,70	023	160,70	023
2,4	4	96	54	50	179,80	024	179,80	024
2,5	4	96	54	50	179,80	025	179,80	025
2,7	4	96	54	50	179,80	027	179,80	027
2,8	4	96	54	50	179,80	028	179,80	028
3,0	6	100	60	55	228,80	030	228,80	030
3,2	6	100	60	55	228,80	032	228,80	032
3,3	6	100	60	55	228,80	033	228,80	033
3,5	6	100	60	55	228,80	035	228,80	035
3,8	6	115	75	69	239,00	038	239,00	038
4,0	6	115	75	69	239,00	040	239,00	040
4,2	6	115	75	69	256,50	042	256,50	042
4,5	6	130	90	83	256,50	045	256,50	045
4,8	6	130	90	83	270,90	048	270,90	048
5,0	6	130	90	83	270,90	050	270,90	050
5,5	6	150	108	99	283,90	055	283,90	055
5,8	6	150	108	99	283,90	058	283,90	058
6,0	6	150	108	99	283,90	060	283,90	060
6,5	8	165	125	115	301,40	065	301,40	065
6,8	8	165	125	115	324,60	068	324,60	068
7,0	8	165	125	115	324,60	070	324,60	070
7,5	8	180	140	128	362,30	075	362,30	075
7,8	8	180	140	128	362,30	078	362,30	078
8,0	8	180	140	128	362,30	080	362,30	080
8,5	10	205	160	147	399,80	085	399,80	085
8,8	10	205	160	147	446,40	088	446,40	088
9,0	10	205	160	147	446,40	090	446,40	090
9,8	10	225	180	165	446,40	098	446,40	098
10,0	10	225	180	165	446,40	100	446,40	100
10,2	12	240	190	174	498,30	102	498,30	102
10,8	12	240	190	174	498,30	108	498,30	108
11,8	12	265	215	197	498,30	118	498,30	118
12,0	12	265	215	197	498,30	120	498,30	120

P	●	
M	●	
K	●	
N		●
S	○	
H		
O		

→ v_c Page 143+146
→ Machining information: Page 160

WTX – High performance deep hole drills

- ▲ up to 20xD without peck drilling
- ▲ pilot hole necessary
- ▲ excellent alignment precision
- ▲ secure chip evacuation





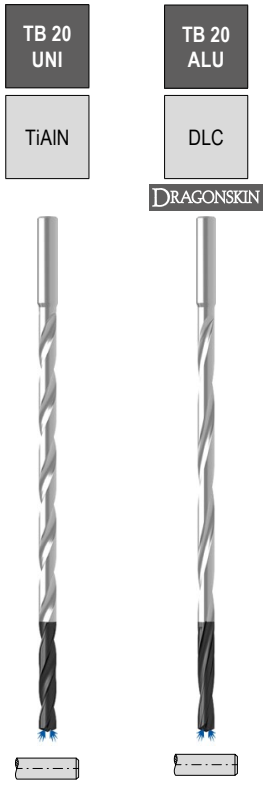

SIG 135°
Solid carbide

11 020 ...

SIG 135°
Solid carbide

11 021 ...

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T7/9G		EUR T7/9G	
2,0	4	92	50	47	170,90	020	170,90	020
2,2	4	92	50	47	170,90	022	170,90	022
2,3	4	92	50	47	170,90	023	170,90	023
2,4	4	112	70	66	189,80	024	189,80	024
2,5	4	112	70	66	189,80	025	189,80	025
2,7	4	112	70	66	189,80	027	189,80	027
2,8	4	112	70	66	189,80	028	189,80	028
3,0	6	120	80	75	255,00	030	255,00	030
3,2	6	120	80	75	255,00	032	255,00	032
3,3	6	120	80	75	255,00	033	255,00	033
3,5	6	120	80	75	255,00	035	255,00	035
3,8	6	130	90	84	265,30	038	265,30	038
4,0	6	130	90	84	265,30	040	265,30	040
4,2	6	160	110	103	285,40	042	285,40	042
4,5	6	160	110	103	285,40	045	285,40	045
4,8	6	160	120	113	301,40	048	301,40	048
5,0	6	160	120	113	301,40	050	301,40	050
5,5	6	185	140	131	314,30	055	314,30	055
5,8	6	185	140	131	314,30	058	314,30	058
6,0	6	185	140	131	314,30	060	314,30	060
6,5	8	210	160	150	336,10	065	336,10	065
6,8	8	210	160	150	360,80	068	360,80	068
7,0	8	210	160	150	360,80	070	360,80	070
7,5	8	230	180	168	402,70	075	402,70	075
7,8	8	230	180	168	402,70	078	402,70	078
8,0	8	230	180	168	402,70	080	402,70	080
8,5	10	260	195	182	443,40	085	443,40	085
8,8	10	290	230	216	498,30	088	498,30	088
9,0	10	290	230	216	498,30	090	498,30	090
9,8	10	290	230	216	498,30	098	498,30	098
10,0	10	290	230	216	498,30	100	498,30	100
10,2	12	315	268	251	547,50	102	547,50	102
10,8	12	315	268	251	547,50	108	547,50	108
11,8	12	315	268	251	547,50	118	547,50	118
12,0	12	315	268	251	547,50	120	547,50	120

P	●	
M	●	
K	●	
N		●
S	○	
H		
O		

→ v_c Page 143+146
→ Machining information: Page 160

WTX – High performance deep hole drills

- ▲ up to 25xD without peck drilling
- ▲ pilot hole necessary
- ▲ excellent alignment precision
- ▲ secure chip evacuation





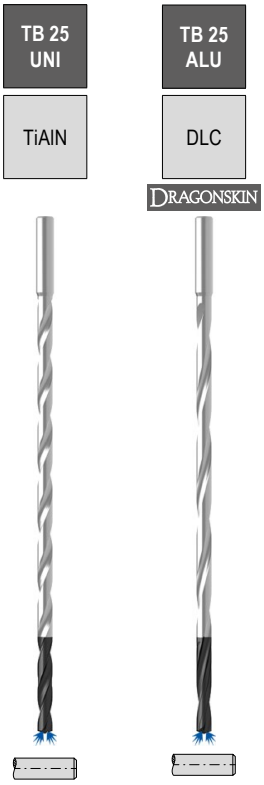

SIG 135°
Solid carbide

11 025 ...

SIG 135°
Solid carbide

11 026 ...

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T7/9G		EUR T7/9G	
2,0	4	104	60	57	181,10	020	181,10	020
2,2	4	104	60	57	181,10	022	181,10	022
2,3	4	104	60	57	181,10	023	181,10	023
2,4	4	125	80	76	207,20	024	207,20	024
2,5	4	125	80	76	207,20	025	207,20	025
2,7	4	125	80	76	207,20	027	207,20	027
2,8	4	125	80	76	207,20	028	207,20	028
3,0	6	135	98	93	295,70	030	295,70	030
3,2	6	135	98	93	295,70	032	295,70	032
3,3	6	150	110	105	328,80	033	328,80	033
3,5	6	150	110	105	328,80	035	328,80	035
3,8	6	160	120	114	337,50	038	337,50	038
4,0	6	160	120	114	337,50	040	337,50	040
4,2	6	160	120	114	337,50	042	337,50	042
4,5	6	180	135	128	352,00	045	352,00	045
4,8	6	180	135	128	352,00	048	352,00	048
5,0	6	180	135	128	352,00	050	352,00	050
5,5	6	205	168	159	378,10	055	378,10	055
5,8	6	205	168	159	378,10	058	378,10	058
6,0	6	205	168	159	378,10	060	378,10	060
6,5	8	240	200	190	421,50	065	421,50	065
6,8	8	240	200	190	421,50	068	421,50	068
7,0	8	240	200	190	421,50	070	421,50	070
7,5	8	260	220	208	469,40	075	469,40	075
7,8	8	260	220	208	469,40	078	469,40	078
8,0	8	260	220	208	469,40	080	469,40	080
8,5	10	285	240	227	527,20	085	527,20	085
8,8	10	310	268	254	573,50	088	573,50	088
9,0	10	310	268	254	573,50	090	573,50	090
9,8	10	310	268	254	573,50	098	573,50	098
10,0	10	310	268	254	573,50	100	573,50	100
10,2	12	375	325	308	689,40	102	689,40	102
10,8	12	375	325	308	689,40	108	689,40	108
11,8	12	375	325	308	689,40	118	689,40	118
12,0	12	375	325	308	689,40	120	689,40	120

P	●	
M	●	
K	●	
N		●
S	○	
H		
O		

→ v_c Page 144+147
→ Machining information: Page 160

WTX – High performance deep hole drills

- ▲ up to 30xD without peck drilling
- ▲ pilot hole necessary
- ▲ excellent alignment precision
- ▲ secure chip evacuation





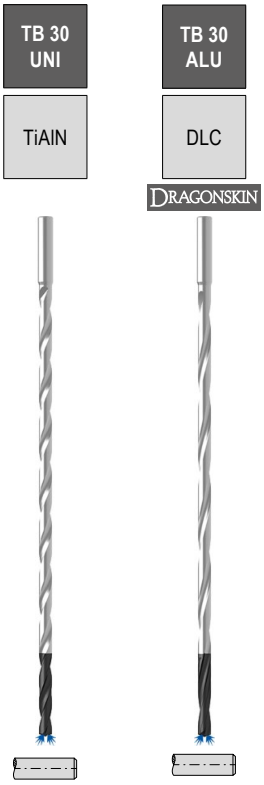

SIG 135°
Solid carbide

11 030 ...

SIG 135°
Solid carbide

11 031 ...

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T7/9G		EUR T7/9G	
2,0	4	115	70	67	194,30	020	194,30	020
2,2	4	115	70	67	194,30	022	194,30	022
2,3	4	115	70	67	194,30	023	194,30	023
2,4	4	138	90	86	224,70	024	224,70	024
2,5	4	138	90	86	224,70	025	224,70	025
2,7	4	138	90	86	224,70	027	224,70	027
2,8	4	138	90	86	224,70	028	224,70	028
3,0	6	150	105	100	379,50	030	379,50	030
3,2	6	150	105	100	379,50	032	379,50	032
3,3	6	185	135	130	389,70	033	389,70	033
3,5	6	185	135	130	389,70	035	389,70	035
3,8	6	185	135	130	389,70	038	389,70	038
4,0	6	185	135	130	389,70	040	389,70	040
4,2	6	185	135	130	389,70	042	389,70	042
4,5	6	215	165	158	401,30	045	401,30	045
4,8	6	215	165	158	401,30	048	401,30	048
5,0	6	215	165	158	401,30	050	401,30	050
5,5	6	230	180	171	420,10	055	420,10	055
5,8	6	230	180	171	420,10	058	420,10	058
6,0	6	230	180	171	420,10	060	420,10	060
6,5	8	280	215	205	463,50	065	463,50	065
6,8	8	280	230	220	480,90	068	480,90	068
7,0	8	280	230	220	480,90	070	480,90	070
7,5	8	280	230	220	480,90	075	480,90	075
7,8	8	315	265	253	536,00	078	536,00	078
8,0	8	315	265	253	536,00	080	536,00	080
8,5	10	350	295	282	618,50	085	618,50	085
8,8	10	380	330	316	650,30	088	650,30	088
9,0	10	380	330	316	650,30	090	650,30	090
9,8	10	380	330	316	650,30	098	650,30	098
10,0	10	380	330	316	650,30	100	650,30	100
10,2	12	430	380	365	830,10	102	830,10	102
10,8	12	430	380	365	830,10	108	830,10	108
11,8	12	430	380	365	830,10	118	830,10	118
12,0	12	430	380	365	830,10	120	830,10	120

P	●	
M	●	
K	●	
N		●
S	○	
H		
O		

→ v_c Page 144+147
→ Machining information: Page 160

WTX – High performance deep hole drills

- ▲ up to 40xD without peck drilling
- ▲ pilot hole necessary
- ▲ excellent alignment precision
- ▲ secure chip evacuation





SIG 135°

Solid carbide

11 040 ...

DC fg6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T7/9G	
3,0	6	195	150	146	480,90	030
4,0	6	220	175	169	480,90	040
4,2	6	245	200	194	531,70	042
4,5	6	245	200	194	531,70	045
4,8	6	275	230	223	567,90	048
5,0	6	275	230	223	567,90	050
5,5	6	305	260	251	611,30	055
5,8	6	305	260	251	611,30	058
6,0	6	305	260	251	611,30	060
6,5	8	345	300	290	657,50	065
6,8	8	345	300	290	657,50	068
7,0	8	345	300	290	657,50	070
7,5	8	385	340	328	731,50	075
7,8	8	385	340	328	731,50	078
8,0	8	385	340	328	731,50	080
8,5	10	430	380	367	805,60	085
8,8	10	430	380	367	805,60	088
9,0	10	430	380	367	805,60	090

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c Page 145
→ Machining information: Page 160

WTX – High performance deep hole drills

- ▲ up to 50xD without peck drilling
- ▲ pilot hole necessary
- ▲ excellent alignment precision
- ▲ secure chip evacuation





SIG 135°

Solid carbide

11 050 ...

DC fg6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T7/9G	
3,0	6	220	175	170	653,40	030
4,0	6	265	220	214	653,40	040
4,2	6	290	245	238	727,30	042
4,5	6	290	245	238	727,30	045
4,8	6	320	275	268	821,40	048
5,0	6	320	275	268	821,40	050
5,5	6	355	310	302	924,10	055
5,8	6	355	315	306	937,30	058
6,0	6	355	315	306	937,30	060
6,5	8	395	350	340	1.042,00	065
6,8	8	425	380	370	1.130,00	068

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c Page 145
→ Machining information: Page 160

The deep hole twist drills are also available in other dimensions on request.

WTX – High Performance Drills

▲ standard shank Ø 3 mm h6 for use in heat shrink adapters

≤ 5xD



MINI

TiAlN



SIG 140°

Solid carbide

DC +0,004 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	11 770 ... EUR T7/9G	
0,10	3	38	1,2	1,0	39,09	00100
0,15	3	38	2,0	1,7	34,47	00150
0,20	3	38	3,5	3,0	30,14	00200
0,25	3	38	3,5	3,0	25,65	00250
0,30	3	38	5,5	5,0	21,17	00300
0,35	3	38	5,5	5,0	21,17	00350
0,40	3	38	7,0	6,0	21,17	00400
0,45	3	38	7,0	6,0	21,17	00450
0,50	3	38	7,0	6,0	21,17	00500
0,55	3	38	7,0	6,0	21,17	00550
0,60	3	38	7,0	6,0	21,17	00600
0,65	3	38	7,0	6,0	21,17	00650
0,70	3	38	10,5	8,0	21,17	00700
0,75	3	38	10,5	8,0	21,17	00750
0,80	3	38	10,5	8,0	21,17	00800
0,85	3	38	10,5	8,0	21,17	00850
0,90	3	38	10,5	8,0	21,17	00900
0,95	3	38	10,5	8,0	21,17	00950
0,97	3	38	10,5	8,0	21,17	00970
0,98	3	38	10,5	8,0	21,17	00980
0,99	3	38	10,5	8,0	21,17	00990
1,00	3	38	10,5	8,0	21,17	01000
1,01	3	38	10,5	8,0	21,17	01010
1,02	3	38	10,5	8,0	21,17	01020
1,03	3	38	10,5	8,0	21,17	01030
1,05	3	38	10,5	8,0	21,17	01050
1,10	3	38	10,5	8,0	21,17	01100
1,15	3	38	10,5	8,0	21,17	01150
1,20	3	38	10,5	8,0	21,17	01200
1,25	3	38	10,5	8,0	21,17	01250
1,30	3	38	10,5	8,0	21,17	01300
1,35	3	38	10,5	8,0	21,17	01350
1,40	3	38	10,5	8,0	21,17	01400
1,45	3	38	10,5	8,0	21,17	01450
1,47	3	38	10,5	8,0	21,17	01470
1,48	3	38	10,5	8,0	21,17	01480
1,49	3	38	10,5	8,0	21,17	01490
1,50	3	38	10,5	8,0	21,17	01500
1,51	3	38	10,5	8,0	21,17	01510
1,52	3	38	10,5	8,0	21,17	01520
1,53	3	38	10,5	8,0	21,17	01530
1,55	3	38	10,5	8,0	21,17	01550
1,60	3	38	10,5	8,0	21,17	01600
1,65	3	38	10,5	8,0	21,17	01650
1,70	3	38	10,5	8,0	21,17	01700
1,75	3	38	10,5	8,0	21,17	01750
1,80	3	38	10,5	8,0	21,17	01800
1,85	3	38	12,0	8,0	21,17	01850
1,90	3	38	12,0	8,0	21,17	01900
1,95	3	38	12,0	8,0	21,17	01950
1,97	3	38	12,0	8,0	21,17	01970
1,98	3	38	12,0	8,0	21,17	01980
1,99	3	38	12,0	8,0	21,17	01990
2,00	3	42	13,0	9,0	30,28	02000
2,01	3	42	13,0	9,0	30,28	02010
2,02	3	42	13,0	9,0	30,28	02020
2,03	3	42	13,0	9,0	30,28	02030
2,05	3	42	13,0	9,0	30,28	02050
2,10	3	42	13,0	9,0	30,28	02100
2,15	3	42	13,0	9,0	30,28	02150
2,20	3	46	15,0	10,0	34,20	02200
2,25	3	46	15,0	10,0	34,20	02250
2,30	3	46	15,0	10,0	34,20	02300
2,35	3	46	15,0	10,0	34,20	02350
2,40	3	46	15,0	10,0	34,20	02400
2,45	3	46	15,0	10,0	34,20	02450
2,47	3	46	15,0	10,0	34,20	02470
2,48	3	46	15,0	10,0	34,20	02480
2,49	3	46	15,0	10,0	34,20	02490
2,50	3	46	15,0	10,0	34,20	02500
2,51	3	46	15,0	10,0	34,20	02510
2,52	3	46	15,0	10,0	34,20	02520
2,53	3	46	15,0	10,0	34,20	02530
2,60	3	46	15,0	10,0	34,20	02600
2,70	3	46	15,0	10,0	34,20	02700
2,80	3	46	15,0	10,0	34,20	02800
2,90	3	46	15,0	10,0	34,20	02900

P	○
M	
K	●
N	●
S	○
H	
O	

→ v_c Page 136

WTX – High Performance Drills

- ▲ Specialised micro drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill for WTX Micro – high-performance deep hole drill



MICRO

DPX74M

DRAGONSKIN





SIG 135°

Solid carbide

10 693 ...

DC m6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	39	5,6	4,0	132,20	00800
0,9	3	39	6,3	4,5	132,20	00900
1,0	3	40	7,0	5,0	117,30	01000
1,1	3	41	7,7	5,5	117,30	01100
1,2	3	41	8,4	6,0	117,30	01200
1,3	3	42	9,1	6,5	117,30	01300
1,4	3	42	9,8	7,0	117,30	01400
1,5	3	43	10,5	7,5	117,30	01500
1,6	3	44	11,2	8,0	123,50	01600
1,7	3	44	11,9	8,5	123,50	01700
1,8	3	45	12,6	9,0	123,50	01800
1,9	3	45	13,3	9,5	123,50	01900
2,0	3	46	14,0	10,0	123,50	02000
2,1	3	47	14,7	10,5	127,40	02100
2,2	3	47	15,4	11,0	127,40	02200
2,3	3	48	16,1	11,5	127,40	02300
2,4	3	48	16,8	12,0	127,40	02400
2,5	3	49	17,5	12,5	127,40	02500
2,6	3	50	18,2	13,0	134,10	02600
2,7	3	50	18,9	13,5	134,10	02700
2,8	3	51	19,6	14,0	134,10	02800
2,9	3	51	20,3	14,5	134,10	02900

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c Page 137
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High Performance Drills

- ▲ Specialised micro drill
- ▲ Universal application
- ▲ Extremely high process security



MICRO

DPX74M

DRAGONSKIN



SIG 128°

Solid carbide

10 694 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	41	8	6,4	138,70	00800
0,9	3	42	9	7,2	138,70	00900
1,0	3	43	10	8,0	123,80	01000
1,1	3	44	11	8,8	123,80	01100
1,2	3	45	12	9,6	123,80	01200
1,3	3	46	13	10,4	123,80	01300
1,4	3	47	14	11,2	123,80	01400
1,5	3	47	15	12,0	123,80	01500
1,6	3	48	16	12,8	133,20	01600
1,7	3	49	17	13,6	133,20	01700
1,8	3	50	18	14,4	133,20	01800
1,9	3	51	19	15,2	133,20	01900
2,0	3	52	20	16,0	133,20	02000
2,1	3	53	21	16,8	135,30	02100
2,2	3	54	22	17,6	135,30	02200
2,3	3	55	23	18,4	135,30	02300
2,4	3	56	24	19,2	135,30	02400
2,5	3	56	25	20,0	135,30	02500
2,6	3	57	26	20,8	139,60	02600
2,7	3	58	27	21,6	139,60	02700
2,8	3	59	28	22,4	139,60	02800
2,9	3	60	29	23,2	139,60	02900

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c Page 138
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High Performance Drills

- ▲ Specialised micro drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



MICRO

DPX74M

DRAGONSKIN

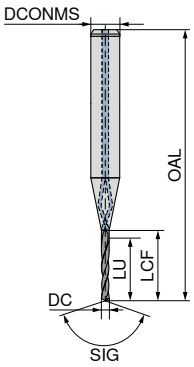

SIG 128°

Solid carbide

10 695 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	44	11,2	9,6	154,50	00800
0,9	3	46	12,6	10,8	154,50	00900
1,0	3	47	14,0	12,0	139,60	01000
1,1	3	48	15,4	13,2	139,60	01100
1,2	3	50	16,8	14,4	139,60	01200
1,3	3	51	18,2	15,6	139,60	01300
1,4	3	52	19,6	16,8	139,60	01400
1,5	3	53	21,0	18,0	139,60	01500
1,6	3	55	22,4	19,2	147,00	01600
1,7	3	56	23,8	20,4	147,00	01700
1,8	3	57	25,2	21,6	147,00	01800
1,9	3	59	26,6	22,8	147,00	01900
2,0	3	60	28,0	24,0	147,00	02000
2,1	3	61	29,4	25,2	150,20	02100
2,2	3	63	30,8	26,4	150,20	02200
2,3	3	64	32,2	27,6	150,20	02300
2,4	3	65	33,6	28,8	150,20	02400
2,5	3	67	35,0	30,0	150,20	02500
2,6	3	68	36,4	31,2	153,30	02600
2,7	3	69	37,8	32,4	153,30	02700
2,8	3	70	39,2	33,6	153,30	02800
2,9	3	72	40,6	34,8	153,30	02900

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c Page 138
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



MICRO

DPX74M

DRAGONSKIN

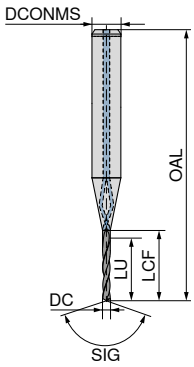

SIG 128°

Solid carbide

10 696 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	48	14,4	12,8	196,40	00800
0,9	3	49	16,2	14,4	196,40	00900
1,0	3	51	18,0	16,0	181,50	01000
1,1	3	53	19,8	17,6	181,50	01100
1,2	3	54	21,6	19,2	181,50	01200
1,3	3	56	23,4	20,8	181,50	01300
1,4	3	58	25,2	22,4	181,50	01400
1,5	3	60	27,0	24,0	181,50	01500
1,6	3	61	28,8	25,6	191,10	01600
1,7	3	63	30,6	27,2	191,10	01700
1,8	3	65	32,4	28,8	191,10	01800
1,9	3	66	34,2	30,4	191,10	01900
2,0	3	68	36,0	32,0	191,10	02000
2,1	3	70	37,8	33,6	195,20	02100
2,2	3	71	39,6	35,2	195,20	02200
2,3	3	73	41,4	36,8	195,20	02300
2,4	3	75	43,2	38,4	195,20	02400
2,5	3	77	45,0	40,0	195,20	02500
2,6	3	78	46,8	41,6	199,40	02600
2,7	3	80	48,6	43,2	199,40	02700
2,8	3	82	50,4	44,8	199,40	02800
2,9	3	83	52,2	46,4	199,40	02900

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 139
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



MICRO

DPX74M

DRAGONSKIN

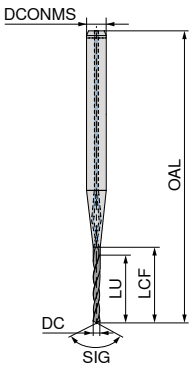

SIG 128°

Solid carbide

10 697 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	51	17,6	16	215,80	00800
0,9	3	53	19,8	18	215,80	00900
1,0	3	55	22,0	20	201,00	01000
1,1	3	57	24,2	22	201,00	01100
1,2	3	59	26,4	24	201,00	01200
1,3	3	61	28,6	26	201,00	01300
1,4	3	63	30,8	28	201,00	01400
1,5	3	66	33,0	30	201,00	01500
1,6	3	68	35,2	32	211,70	01600
1,7	3	70	37,4	34	211,70	01700
1,8	3	72	39,6	36	211,70	01800
1,9	3	74	41,8	38	211,70	01900
2,0	3	76	44,0	40	211,70	02000
2,1	3	78	46,2	42	216,00	02100
2,2	3	80	48,4	44	216,00	02200
2,3	3	82	50,6	46	216,00	02300
2,4	3	85	52,8	48	216,00	02400
2,5	3	87	55,0	50	216,00	02500
2,6	3	89	57,2	52	220,80	02600
2,7	3	91	59,4	54	220,80	02700
2,8	3	93	61,6	56	220,80	02800
2,9	3	95	63,8	58	220,80	02900

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 139
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



MICRO

DPX74M

DRAGONSKIN

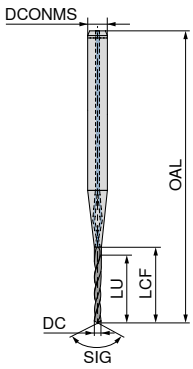

SIG 128°

Solid carbide

10 698 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	54	21,6	16,0	240,10	00800
0,9	3	57	24,3	20,5	240,10	00900
1,0	3	60	27,0	25,0	222,40	01000
1,1	3	63	29,7	27,5	222,40	01100
1,2	3	65	32,4	30,0	222,40	01200
1,3	3	68	35,1	32,5	222,40	01300
1,4	3	71	37,8	35,0	222,40	01400
1,5	3	73	40,5	37,5	222,40	01500
1,6	3	76	43,2	40,0	234,20	01600
1,7	3	78	45,9	42,5	234,20	01700
1,8	3	81	48,6	45,0	234,20	01800
1,9	3	84	51,3	47,5	234,20	01900
2,0	3	86	54,0	50,0	234,20	02000
2,1	3	89	56,7	52,5	239,20	02100
2,2	3	91	59,4	55,0	239,20	02200
2,3	3	94	62,1	57,5	239,20	02300
2,4	3	97	64,8	60,0	239,20	02400
2,5	3	99	67,5	62,5	239,20	02500
2,6	3	102	70,2	65,0	244,30	02600
2,7	3	104	72,9	67,5	244,30	02700
2,8	3	107	75,6	70,0	244,30	02800
2,9	3	110	78,3	72,5	244,30	02900

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 139
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



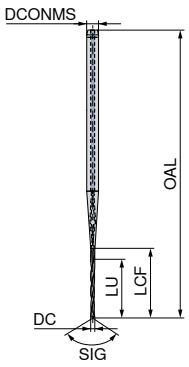

SIG 128°
Solid carbide

Tolerances and angles

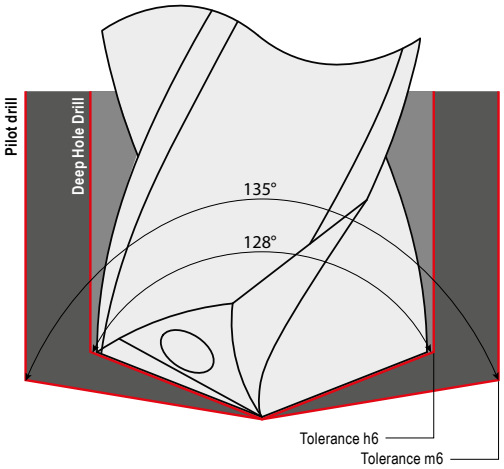

10 699 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4/9F	
0,8	3	59	25,6	19,2	265,80	00800
0,9	3	62	28,8	24,5	265,80	00900
1,0	3	65	32,0	30,0	246,20	01000
1,1	3	68	35,2	33,0	246,20	01100
1,2	3	71	38,4	36,0	246,20	01200
1,3	3	74	41,6	39,0	246,20	01300
1,4	3	78	44,8	42,0	246,20	01400
1,5	3	81	48,0	45,0	246,20	01500
1,6	3	84	51,2	48,0	259,40	01600
1,7	3	87	54,4	51,0	259,40	01700
1,8	3	90	57,6	54,0	259,40	01800
1,9	3	93	60,8	57,0	259,40	01900
2,0	3	96	64,0	60,0	259,40	02000
2,1	3	99	67,2	63,0	264,90	02100
2,2	3	102	70,4	66,0	264,90	02200
2,3	3	106	73,6	69,0	264,90	02300
2,4	3	109	76,8	72,0	264,90	02400
2,5	3	112	80,0	75,0	264,90	02500
2,6	3	115	83,2	78,0	270,50	02600
2,7	3	118	86,4	81,0	270,50	02700
2,8	3	121	89,6	84,0	270,50	02800
2,9	3	124	92,8	87,0	270,50	02900

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 139
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

Coolant transfer pipe with strainer
HSK-A 63 / HSK-A 100



With the help of the new coolant transfer pipe, it is possible to filter very small chips and impurities out of the coolant.
More information on this can be found in the
→ **Catalogue Clamping Technology, chapter 16, page 156**.

WTX – Drill-Reamer 1/100

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes





Feed BR100

DPX14S

DRAGONSKIN

SIG 140°

Solid carbide

10 707 ...

DC ±0,003 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4	
3,97	6	66	24	17	36	180,90	03970
3,98	6	66	24	17	36	180,90	03980
3,99	6	66	24	17	36	180,90	03990
4,00	6	66	24	17	36	180,90	04000
4,01	6	66	24	17	36	180,90	04010
4,02	6	66	24	17	36	180,90	04020
4,97	6	66	28	20	36	180,90	04970
4,98	6	66	28	20	36	180,90	04980
4,99	6	66	28	20	36	180,90	04990
5,00	6	66	28	20	36	180,90	05000
5,01	6	66	28	20	36	180,90	05010
5,02	6	66	28	20	36	180,90	05020
5,97	6	66	28	20	36	180,90	05970
5,98	6	66	28	20	36	180,90	05980
5,99	6	66	28	20	36	180,90	05990
6,00	6	66	28	20	36	180,90	06000
6,01	6	66	28	20	36	180,90	06010
6,02	6	66	28	20	36	180,90	06020
7,97	8	79	41	29	36	180,90	07970
7,98	8	79	41	29	36	180,90	07980
7,99	8	79	41	29	36	180,90	07990
8,00	8	79	41	29	36	180,90	08000
8,01	8	79	41	29	36	180,90	08010
8,02	8	79	41	29	36	180,90	08020
9,97	10	89	47	35	40	205,80	09970
9,98	10	89	47	35	40	205,80	09980
9,99	10	89	47	35	40	205,80	09990
10,00	10	89	47	35	40	205,80	10000
10,01	10	89	47	35	40	205,80	10010
10,02	10	89	47	35	40	205,80	10020
11,97	12	102	55	40	45	282,00	11970
11,98	12	102	55	40	45	282,00	11980
11,99	12	102	55	40	45	282,00	11990
12,00	12	102	55	40	45	282,00	12000
12,01	12	102	55	40	45	282,00	12010
12,02	12	102	55	40	45	282,00	12020

P	●
M	●
K	●
N	
S	
H	
O	

Tolerances

e.g. Ø 8 F7 = 8.02 mm

Ø 4	3,97	U 7	**X 7**			
	3,98	**N 10**	**N 11**	R 7		
	3,99	M 8	**N 7**	**N 8**	**N 9**	
	4,00	**J 7**	**J 8**	JS 7	JS 8	JS 9
	4,01	**G 7**	**H 8**			
	4,02	**F 8**	**H 9**			
Ø 5	4,97	U 7	**X 7**			
	4,98	**N 10**	**N 11**	R 7		
	4,99	M 8	**N 7**	**N 8**	**N 9**	
	5,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	5,01	**G 7**	**H 8**			
	5,02	**F 8**	**H 9**			
Ø 6	5,97	U 7	**X 7**			
	5,98	**N 10**	**N 11**	R 7		
	5,99	M 8	**N 7**	**N 8**	**N 9**	
	6,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	6,01	**G 7**	**H 8**			
	6,02	**F 8**	**H 9**			
Ø 8	7,97	S 7	**U 7**			
	7,98	N 8	**N 10**	**N 11**	P 7	R 7
	7,99	K 8	M 6	M 7	**M 8**	N 9
	8,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	8,01	G 7	**H 8**			
	8,02	**F 7**	F 8	**H 9**		
Ø 10	9,97	S 7	**U 7**			
	9,98	N 8	**N 10**	**N 11**	P 7	R 7
	9,99	K 8	M 6	M 7	**M 8**	N 9
	10,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	10,01	G 7	**H 8**			
	10,02	**F 7**	F 8	H 9		
Ø 12	11,97	N 11	R 7	**S 7**		
	11,98	N 8	**N 9**	**N 10**	**P 7**	
	11,99	K 8	**M 6**	**M 7**	**M 8**	N 7
	12,00	**J 7**	**J 8**	**JS 7**	**JS 8**	
	12,01	G 6	**H 7**	H 8	**JS 9**	
	12,02	F 7				

Tolerance classes written in standard print are not optimally positioned in the tolerance field.

→ v_c Page 140

WTX – Drill-Reamer 1/100

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes







SIG 140°

Solid carbide

10 713 ...

DC ±0,003 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4	
3,97	6	74	36	29	36	225,60	03970
3,98	6	74	36	29	36	225,60	03980
3,99	6	74	36	29	36	225,60	03990
4,00	6	74	36	29	36	225,60	04000
4,01	6	74	36	29	36	225,60	04010
4,02	6	74	36	29	36	225,60	04020
4,97	6	82	44	35	36	225,60	04970
4,98	6	82	44	35	36	225,60	04980
4,99	6	82	44	35	36	225,60	04990
5,00	6	82	44	35	36	225,60	05000
5,01	6	82	44	35	36	225,60	05010
5,02	6	82	44	35	36	225,60	05020
5,97	6	82	44	35	36	225,60	05970
5,98	6	82	44	35	36	225,60	05980
5,99	6	82	44	35	36	225,60	05990
6,00	6	82	44	35	36	225,60	06000
6,01	6	82	44	35	36	225,60	06010
6,02	6	82	44	35	36	225,60	06020
7,97	8	91	53	43	36	225,60	07970
7,98	8	91	53	43	36	225,60	07980
7,99	8	91	53	43	36	225,60	07990
8,00	8	91	53	43	36	225,60	08000
8,01	8	91	53	43	36	225,60	08010
8,02	8	91	53	43	36	225,60	08020
9,97	10	103	61	49	40	309,20	09970
9,98	10	103	61	49	40	309,20	09980
9,99	10	103	61	49	40	309,20	09990
10,00	10	103	61	49	40	309,20	10000
10,01	10	103	61	49	40	309,20	10010
10,02	10	103	61	49	40	309,20	10020
11,97	12	118	71	56	45	434,50	11970
11,98	12	118	71	56	45	434,50	11980
11,99	12	118	71	56	45	434,50	11990
12,00	12	118	71	56	45	434,50	12000
12,01	12	118	71	56	45	434,50	12010
12,02	12	118	71	56	45	434,50	12020

P	●
M	●
K	●
N	
S	
H	
O	

Tolerances

e.g. Ø 8 F7 = 8.02 mm

Ø 4	3,97	U 7	**X 7**			
	3,98	**N 10**	**N 11**	R 7		
	3,99	M 8	**N 7**	**N 8**	**N 9**	
	4,00	**J 7**	**J 8**	JS 7	JS 8	JS 9
	4,01	**G 7**	**H 8**			
	4,02	**F 8**	**H 9**			
Ø 5	4,97	U 7	**X 7**			
	4,98	**N 10**	**N 11**	R 7		
	4,99	M 8	**N 7**	**N 8**	**N 9**	
	5,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	5,01	**G 7**	**H 8**			
	5,02	**F 8**	**H 9**			
Ø 6	5,97	U 7	**X 7**			
	5,98	**N 10**	**N 11**	R 7		
	5,99	M 8	**N 7**	**N 8**	**N 9**	
	6,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	6,01	**G 7**	**H 8**			
	6,02	**F 8**	**H 9**			
Ø 8	7,97	S 7	**U 7**			
	7,98	N 8	**N 10**	**N 11**	P 7	R 7
	7,99	K 8	M 6	M 7	**M 8**	N 9
	8,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	8,01	G 7	**H 8**			
	8,02	**F 7**	F 8	**H 9**		
Ø 10	9,97	S 7	**U 7**			
	9,98	N 8	**N 10**	**N 11**	P 7	R 7
	9,99	K 8	M 6	M 7	**M 8**	N 9
	10,00	**J 7**	**J 8**	**JS 7**	**JS 8**	**JS 9**
	10,01	G 7	**H 8**			
	10,02	**F 7**	F 8	H 9		
Ø 12	11,97	N 11	R 7	**S 7**		
	11,98	N 8	**N 9**	**N 10**	**P 7**	
	11,99	K 8	**M 6**	**M 7**	**M 8**	N 7
	12,00	**J 7**	**J 8**	**JS 7**	**JS 8**	
	12,01	G 6	**H 7**	H 8	**JS 9**	
	12,02	F 7				

Tolerance classes written in standard print are not optimally positioned in the tolerance field.

→ v_c Page 141

WTX – Drill-Reamer H7

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming to tolerance H7 in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes
- ▲ Optimum roundness – tolerance H7







SIG 140°

Solid carbide

10 711 ...

DC H7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4	
4	6	66	24	17	36	180,90	**04000**
5	6	66	28	20	36	180,90	**05000**
6	6	66	28	20	36	180,90	**06000**
8	8	79	41	29	36	180,90	**08000**
10	10	89	47	35	40	205,80	**10000**
12	12	102	55	40	45	282,00	**12000**
14	14	107	60	43	45	377,30	**14000**
16	16	115	65	45	48	524,50	**16000**

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 140

Special dimensions available upon request

WTX – Drill-Reamer H7

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming to tolerance H7 in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes
- ▲ Optimum roundness – tolerance H7







SIG 140°

Solid carbide

10 719 ...

DC H7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	EUR T4	
4	6	74	36	29	36	225,60	**04000**
5	6	82	44	35	36	225,60	**05000**
6	6	82	44	35	36	225,60	**06000**
8	8	91	53	43	36	225,60	**08000**
10	10	103	61	49	40	309,20	**10000**
12	12	118	71	56	45	434,50	**12000**
14	14	124	77	60	45	589,40	**14000**
16	16	133	83	63	48	709,20	**16000**
18	18	143	93	71	48	851,50	**18000**
20	20	153	101	77	50	1.024,00	**20000**

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 141

Special dimensions available upon request

WTX – Short 90° step drill

▲ for core hole plus countersink for thread cutting







SIG 140°

Solid carbide

10 767 ...

For threads	DC m7 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	LCF mm	EUR T4	
M3	2,5	6	62	8,8	20	48,37	**02500**
M4	3,3	6	62	11,4	24	58,79	**03300**
M5	4,2	6	66	13,6	28	67,45	**04200**
M6	5,0	8	79	16,5	34	84,74	**05000**
M8	6,8	10	89	21,0	47	138,40	**06800**
M10	8,5	12	102	25,5	55	169,60	**08500**
M12	10,2	14	107	30,0	60	238,70	**10200**
M14	12,0	16	115	34,5	65	290,70	**12000**
M16	14,0	18	123	38,5	73	299,30	**14000**

P	●
M	
K	●
N	
S	
H	○
O	

→ v_c Page 135

WTX – Short 90° step drill

▲ for core hole plus countersink for thread forming







SIG 140°

Solid carbide

10 772 ...

For threads	DC m7 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	LCF mm	EUR T4	
M3	2,80	6	62	8,8	20	48,37	**02800**
M4	3,70	6	62	11,4	24	58,79	**03700**
M5	4,65	6	66	13,6	28	67,45	**04650**
M6	5,55	8	79	16,5	34	84,74	**05550**
M8	7,45	10	89	21,0	47	138,40	**07450**
M10	9,30	12	102	25,5	55	169,60	**09300**
M12	11,20	14	107	30,0	60	238,70	**11200**
M14	13,00	16	115	34,5	65	290,70	**13000**
M16	15,00	18	123	38,5	73	299,30	**15000**

P	●
M	
K	●
N	
S	
H	○
O	

→ v_c Page 135

WTX – Short 90° step drill

▲ for core hole plus countersink for thread cutting







SIG 140°

Solid carbide

10 783 ...

For threads	DC $_{m7}$ mm	DCONMS $_{h6}$ mm	OAL mm	SDL_1 mm	LCF mm	EUR T4	
M4	3,3	6	62	11,4	24	75,79	**03300**
M5	4,2	6	66	13,6	28	79,67	**04200**
M6	5,0	8	79	16,5	34	101,10	**05000**
M8	6,8	10	89	21,0	47	164,00	**06800**
M10	8,5	12	102	25,5	55	202,40	**08500**
M12	10,2	14	107	30,0	60	283,90	**10200**
M14	12,0	16	115	34,5	65	344,70	**12000**
M16	14,0	18	123	38,5	73	356,50	**14000**

P	●
M	
K	●
N	
S	
H	○
O	

→ v_c Page 135

WTX – Short 90° step drill

▲ for core hole plus countersink for thread forming







SIG 140°

Solid carbide

10 788 ...

For threads	DC $_{m7}$ mm	DCONMS $_{h6}$ mm	OAL mm	SDL_1 mm	LCF mm	EUR T4	
M4	3,70	6	62	11,4	24	75,79	**03700**
M5	4,65	6	66	13,6	28	79,67	**04650**
M6	5,55	8	79	16,5	34	101,10	**05550**
M8	7,45	10	89	21,0	47	164,00	**07450**
M10	9,30	12	102	25,5	55	202,40	**09300**
M12	11,20	14	107	30,0	60	283,90	**11200**
M14	13,00	16	115	34,5	65	344,70	**13000**
M16	15,00	18	123	38,5	73	356,50	**15000**

P	●
M	
K	●
N	
S	
H	○
O	

→ v_c Page 135

NC Spot Drill, factory standard

▲ spiral flute



			NC-A		NC-A TiAIN		NC-A		NC-A TiAIN		NC-A		NC-A TiAIN	
			SIG 90°		SIG 90°		SIG 120°		SIG 120°		SIG 142°		SIG 142°	
			Solid carbide		Solid carbide		Solid carbide		Solid carbide		Solid carbide		Solid carbide	
			10 702 ...		**10 716 ...**		**10 703 ...**		**10 717 ...**		**10 704 ...**		**10 718 ...**	
DC_{js8} mm	OAL mm	LCF mm	EUR T3		EUR T3		EUR T3		EUR T3		EUR T3		EUR T3	
2	32	6	17,81	**002**	27,38	**002** 1)	17,81	**002**	27,38	**002** 1)	17,81	**002**	27,38	**002** 1)
3	32	8	17,81	**003**	27,38	**003** 1)	17,81	**003**	27,38	**003** 1)	17,81	**003**	27,38	**003** 1)
4	40	10	19,86	**004**	29,69	**004** 1)	19,86	**004**	29,69	**004** 1)	19,86	**004**	29,69	**004** 1)
5	50	13	22,75	**005**	32,59	**005** 1)	22,75	**005**	32,59	**005** 1)	22,75	**005**	32,59	**005** 1)
6	50	13	25,34	**006**	35,06	**006**	25,34	**006**	35,06	**006**	25,34	**006**	35,06	**006**
8	60	23	39,09	**008**	49,27	**008**	39,09	**008**	49,27	**008**	39,09	**008**	49,27	**008**
10	70	24	54,90	**010**	64,90	**010**	54,90	**010**	64,90	**010**	54,90	**010**	64,90	**010**
12	70	24	74,03	**012**	84,33	**012**	74,03	**012**	84,33	**012**	74,03	**012**	84,33	**012**
14	75	26	108,80	**014**	125,60	**014**	108,80	**014**	125,60	**014**	108,80	**014**	125,60	**014**
16	75	29	134,30	**016**	144,80	**016**	134,30	**016**	144,80	**016**	134,30	**016**	144,80	**016**
18	100	35	253,30	**018**	260,60	**018**	253,30	**018**	260,60	**018**	253,30	**018**	260,60	**018**
20	100	35	237,60	**020**	273,80	**020**	237,60	**020**	273,80	**020**	237,60	**020**	273,80	**020**
P				●		●		●		●		●		●
M														
K				●		●		●		●		●		●
N				●		●		●		●		●		●
S														
H						○				○				○
O														

1) DIN 6535 HA Shank

→ v_c Page 149+150

NC Spot Drill, factory standard, long

▲ spiral flutes



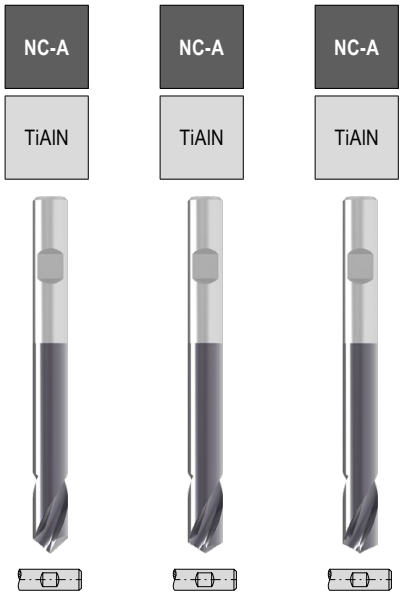

DC $_{js8}$ mm	OAL mm	LCF mm	SIG 90° Solid carbide 10 724 ... EUR T3		SIG 120° Solid carbide 10 726 ... EUR T3		SIG 142° Solid carbide 10 727 ... EUR T3	
3	66	8	29,69	003 1)	29,69	003 1)	29,69	003 1)
4	74	10	33,46	004 1)	33,46	004 1)	33,46	004 1)
6	82	13	43,02	006	43,02	006	43,02	006
8	91	23	62,86	008	62,86	008	62,86	008
10	103	24	87,51	010	87,51	010	87,51	010
12	118	24	132,20	012	132,20	012	132,20	012
16	133	29	249,20	016	249,20	016	249,20	016
P			●		●		●	
M								
K			●		●		●	
N			●		●		●	
S								
H			○		○		○	
O								

1) DIN 6535 HA Shank

→ v_c Page 151

Centre drills, DIN 333, form A

▲ Spiral-fluted
▲ Up to and including diameter DC of 0.8 mm suitable for use on one side only

ZB



SIG 120°
Solid carbide

DC k13 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	10 708 ... EUR T3	
0,50	3,15	20,0	0,76	49,99	**050** 1)
0,80	3,15	20,0	1,07	49,99	**080** 1)
1,00	3,15	31,5	1,31	50,70	**100**
1,25	3,15	31,5	1,54	50,70	**125**
1,60	4,00	35,5	1,94	54,16	**160**
2,00	5,00	40,0	2,32	56,07	**200**
2,50	6,30	45,0	2,88	62,45	**250**
3,15	8,00	50,0	3,49	74,15	**315**
4,00	10,00	56,0	4,45	88,80	**400**
5,00	12,50	63,0	5,46	129,70	**500**
6,30	16,00	71,0	6,78	182,40	**630**

P	●
M	
K	●
N	●
S	
H	
O	

1) Single ended

→ v_c Page 148

WTX – Drilling Head for Exchangeable drills

▲ extra long head type
▲ three-edged

Scope of supply:
Drill head incl. differential screw





Change Feed UNI
Ti750

SIG 140°
Solid carbide

DC m7 mm	OAL mm	10 925 ... EUR W2	
14,0	13,5	116,90	140
14,1	13,5	116,90	141
14,2	13,5	116,90	142
14,3	13,5	116,90	143
14,4	13,5	116,90	144
14,5	14,0	116,90	145
14,6	14,0	116,90	146
14,7	14,0	116,90	147
14,8	14,0	116,90	148
14,9	14,0	116,90	149
15,0	14,4	116,90	150
15,1	14,4	116,90	151
15,2	14,4	116,90	152
15,3	14,4	116,90	153
15,4	14,4	116,90	154
15,5	15,4	130,90	155
15,6	15,4	130,90	156
15,7	15,4	130,90	157
15,8	15,4	130,90	158
15,9	15,4	130,90	159
16,0	15,4	130,90	160
16,1	15,4	130,90	161
16,2	15,4	130,90	162
16,3	15,4	130,90	163
16,4	15,4	130,90	164
16,5	16,3	130,90	165
16,6	16,3	130,90	166
16,7	16,3	130,90	167
16,8	16,3	130,90	168
16,9	16,3	130,90	169
17,0	16,3	130,90	170
17,1	16,3	130,90	171
17,2	16,3	130,90	172
17,3	16,3	130,90	173
17,4	16,3	130,90	174
17,5	17,2	148,70	175
17,6	17,2	148,70	176
17,7	17,2	148,70	177
17,8	17,2	148,70	178
17,9	17,2	148,70	179
18,0	17,2	148,70	180
18,1	17,2	148,70	181
18,2	17,2	148,70	182
18,3	17,2	148,70	183
18,4	17,2	148,70	184
18,5	18,2	148,70	185
18,6	18,2	148,70	186
18,7	18,2	148,70	187
18,8	18,2	148,70	188
18,9	18,2	148,70	189

DC m7 mm	OAL mm	10 925 ... EUR W2	
19,0	18,2	148,70	190
19,1	18,2	148,70	191
19,2	18,2	148,70	192
19,3	18,2	148,70	193
19,4	18,2	148,70	194
19,5	19,1	170,50	195
19,6	19,1	170,50	196
19,7	19,1	170,50	197
19,8	19,1	170,50	198
19,9	19,1	170,50	199
20,0	19,1	170,50	200
20,1	19,1	170,50	201
20,2	19,1	170,50	202
20,3	19,1	170,50	203
20,4	19,1	170,50	204
20,5	20,0	170,50	205
20,6	20,0	170,50	206
20,7	20,0	170,50	207
20,8	20,0	170,50	208
20,9	20,0	170,50	209
21,0	20,0	170,50	210
21,1	20,0	170,50	211
21,2	20,0	170,50	212
21,3	20,0	170,50	213
21,4	20,0	170,50	214
21,5	21,0	170,50	215
21,6	21,0	170,50	216
21,7	21,0	170,50	217
21,8	21,0	170,50	218
21,9	21,0	170,50	219
22,0	21,0	170,50	220
22,1	21,0	170,50	221
22,2	21,0	170,50	222
22,3	21,0	170,50	223
22,4	21,0	170,50	224
22,5	21,9	189,60	225
22,6	21,9	189,60	226
22,7	21,9	189,60	227
22,8	21,9	189,60	228
22,9	21,9	189,60	229
23,0	21,9	189,60	230
23,1	21,9	189,60	231
23,2	21,9	189,60	232
23,3	21,9	189,60	233
23,4	21,9	189,60	234
23,5	22,8	189,60	235
23,6	22,8	189,60	236
23,7	22,8	189,60	237
23,8	22,8	189,60	238
23,9	22,8	189,60	239
24,0	22,8	189,60	240
24,1	22,8	189,60	241
24,2	22,8	189,60	242
24,3	22,8	189,60	243
24,4	22,8	189,60	244
24,5	23,8	215,00	245
24,6	23,8	215,00	246
24,7	23,8	215,00	247
24,8	23,8	215,00	248
24,9	23,8	215,00	249
25,0	23,8	215,00	250

P	●
M	
K	●
N	
S	
H	
O	

→ v_c Page 156
→ Application recommendation on page 162

When changing the head, please observe the specified tightening torque.

Continued on next page

WTX – Drilling Head for Exchangeable drills

▲ extra long head type
▲ three-edged

Scope of supply:
Drill head incl. differential screw



Change Feed UNI

Ti750



SIG 140°
Solid carbide

DC m7 mm	OAL mm	10 925 ... EUR W2	
25,1	23,8	215,00	251
25,2	23,8	215,00	252
25,3	23,8	215,00	253
25,4	23,8	215,00	254
25,5	24,7	215,00	255
25,6	24,7	215,00	256
25,7	24,7	215,00	257
25,8	24,7	215,00	258
25,9	24,7	215,00	259
26,0	24,7	215,00	260
26,1	24,7	215,00	261
26,2	24,7	215,00	262
26,3	24,7	215,00	263
26,4	24,7	215,00	264
26,5	25,6	231,80	265
26,6	25,6	231,80	266
26,7	25,6	231,80	267
26,8	25,6	231,80	268
26,9	25,6	231,80	269
27,0	25,6	231,80	270
27,1	25,6	231,80	271
27,2	25,6	231,80	272
27,3	25,6	231,80	273
27,4	25,6	231,80	274
27,5	26,6	231,80	275
27,6	26,6	231,80	276
27,7	26,6	231,80	277
27,8	26,6	231,80	278
27,9	26,6	231,80	279
28,0	26,6	231,80	280
28,1	26,6	231,80	281
28,2	26,6	231,80	282
28,3	26,6	231,80	283
28,4	26,6	231,80	284
28,5	27,5	255,70	285
28,6	27,5	255,70	286
28,7	27,5	255,70	287
28,8	27,5	255,70	288
28,9	27,5	255,70	289
29,0	27,5	255,70	290
29,1	27,5	255,70	291
29,2	27,5	255,70	292
29,3	27,5	255,70	293
29,4	27,5	255,70	294
29,5	28,4	255,70	295
29,6	28,4	255,70	296
29,7	28,4	255,70	297
29,8	28,4	255,70	298
29,9	28,4	255,70	299
30,0	28,4	255,70	300

DC m7 mm	OAL mm	10 925 ... EUR W2	
30,1	28,4	255,70	301
30,2	28,4	255,70	302
30,3	28,4	255,70	303
30,4	28,4	255,70	304
30,5	29,3	279,30	305
30,6	29,3	279,30	306
30,7	29,3	279,30	307
30,8	29,3	279,30	308
30,9	29,3	279,30	309
31,0	29,3	279,30	310
31,1	29,3	279,30	311
31,2	29,3	279,30	312
31,3	29,3	279,30	313
31,4	29,3	279,30	314
31,5	30,3	279,30	315
31,6	30,3	279,30	316
31,7	30,3	279,30	317
31,8	30,3	279,30	318
31,9	30,3	279,30	319
32,0	30,3	279,30	320

P	●
M	
K	●
N	
S	
H	
O	

→ v_c Page 156
→ Application recommendation on page 162

When changing the head, please observe the specified tightening torque.

WTX – Holder for Exchangeable drills

Scope of supply:
Holder incl. blade holder and interchangeable blade

≤ 3xD

Change Feed



DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	DF mm	torque moment Nm	10 914 ... EUR W1	
14,00 - 14,49	16	120	72	48	20	0,7	327,50	140
14,50 - 14,99	16	122	74	49	20	0,7	327,50	145
15,00 - 15,49	16	124	76	51	25	0,7	327,50	150
15,50 - 16,49	20	131	81	54	25	0,7	338,30	155
16,50 - 17,49	20	135	85	58	25	0,7	338,30	165
17,50 - 18,49	20	140	90	61	25	1,3	338,30	175
18,50 - 19,49	25	150	94	64	31	1,3	398,60	185
19,50 - 20,49	25	155	99	68	31	2,0	402,20	195
20,50 - 21,49	25	159	103	71	31	2,0	440,40	205
21,50 - 22,49	25	164	108	74	31	2,0	440,40	215
22,50 - 23,49	25	168	112	78	31	2,0	482,50	225
23,50 - 24,49	25	173	117	81	31	2,0	482,50	235
24,50 - 25,49	32	182	122	84	38	3,1	543,00	245
25,50 - 26,49	32	186	126	87	38	3,1	543,00	255
26,50 - 27,49	32	191	131	91	38	3,1	543,00	265
27,50 - 28,49	32	195	135	94	38	3,1	543,00	275
28,50 - 29,49	32	200	140	97	38	5,6	625,90	285
29,50 - 30,49	32	204	144	101	38	5,6	625,90	295
30,50 - 31,49	32	209	149	104	38	5,6	684,60	305
31,50 - 32,49	32	213	153	107	38	5,6	684,60	315

WTX – Holder for Exchangeable drills

Scope of supply:
Holder incl. blade holder and interchangeable blade

≤ 5xD

Change Feed



DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	DF mm	torque moment Nm	10 916 ... EUR W1	
14,00 - 14,49	16	149	101	77	20	0,7	361,60	140
14,50 - 14,99	16	152	104	79	20	0,7	361,60	145
15,00 - 15,49	16	155	107	82	25	0,7	361,60	150
15,50 - 16,49	20	164	114	87	25	0,7	391,70	155
16,50 - 17,49	20	170	120	93	25	0,7	391,70	165
17,50 - 18,49	20	177	127	98	25	1,3	391,70	175
18,50 - 19,49	25	189	133	103	31	1,3	448,00	185
19,50 - 20,49	25	196	140	109	31	2,0	451,50	195
20,50 - 21,49	25	202	146	114	31	2,0	492,80	205
21,50 - 22,49	25	209	153	119	31	2,0	492,80	215
22,50 - 23,49	25	215	159	124	31	2,0	530,70	225
23,50 - 24,49	25	222	166	130	31	2,0	530,70	235
24,50 - 25,49	32	233	173	135	38	3,1	589,90	245
25,50 - 26,49	32	239	179	140	38	3,1	589,90	255
26,50 - 27,49	32	246	186	146	38	3,1	589,90	265
27,50 - 28,49	32	252	192	151	38	3,1	589,90	275
28,50 - 29,49	32	259	199	156	38	5,6	671,30	285
29,50 - 30,49	32	265	205	162	38	5,6	671,30	295
30,50 - 31,49	32	272	212	167	38	5,6	729,00	305
31,50 - 32,49	32	278	218	172	38	5,6	729,00	315

Interchangeable blade

Blade holder

Torque handle

Differential screw

Spare parts DC	80 022 ... EUR W1		80 020 ... EUR Y7		80 023 ... EUR W1		10 950 ... EUR W2	
14,00 - 14,49	25,15	007	21,08	025	373,50	012	7,16	064
14,50 - 14,99	25,15	007	21,08	025	373,50	012	7,16	064
15,00 - 15,49	25,15	007	21,08	025	373,50	012	7,16	064
15,50 - 16,49	25,15	007	21,08	025	373,50	012	7,16	064
16,50 - 17,49	25,15	007	21,08	025	373,50	012	7,16	064
17,50 - 18,49	25,15	008	21,08	025	399,80	060	7,16	065
18,50 - 19,49	25,15	008	21,08	025	399,80	060	7,16	065
19,50 - 20,49	29,26	010	21,08	025	399,80	060	7,16	066
20,50 - 21,49	29,26	010	21,08	025	399,80	060	7,16	066
21,50 - 22,49	29,26	010	21,08	025	399,80	060	7,16	066
22,50 - 23,49	29,26	010	21,08	025	399,80	060	7,16	066
23,50 - 24,49	29,26	010	21,08	025	399,80	060	7,16	066
24,50 - 25,49	47,24	015	21,08	025	399,80	060	7,16	067
25,50 - 26,49	47,24	015	21,08	025	399,80	060	7,16	067
26,50 - 27,49	47,24	015	21,08	025	399,80	060	7,16	067
27,50 - 28,49	47,24	015	21,08	025	399,80	060	7,16	067
28,50 - 29,49	47,24	015	21,08	025	399,80	060	7,16	068
29,50 - 30,49	47,24	015	21,08	025	399,80	060	7,16	068
30,50 - 31,49	47,24	015	21,08	025	399,80	060	7,16	068
31,50 - 32,49	47,24	015	21,08	025	399,80	060	7,16	068

WTX – Holder for Exchangeable drills

Scope of supply:
Holder incl. blade holder and interchangeable blade





DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	DF mm	torque moment Nm	10 917 ... EUR W1	
14,00 - 14,49	16	192	144	120	20	0,7	443,10	14000
14,50 - 14,99	16	197	149	124	20	0,7	443,10	14500
15,00 - 15,49	16	202	154	129	25	0,7	443,10	15000
15,50 - 16,49	20	213	163	137	25	0,7	476,00	15500
16,50 - 17,49	20	223	173	145	25	0,7	476,00	16500
17,50 - 18,49	20	232	182	153	25	1,3	476,00	17500
18,50 - 19,49	25	248	192	162	31	1,3	536,00	18500
19,50 - 20,49	25	257	201	170	31	2,0	543,30	19500
20,50 - 21,49	25	267	211	178	31	2,0	579,90	20500
21,50 - 22,49	25	276	220	187	31	2,0	579,90	21500
22,50 - 23,49	25	286	230	195	31	2,0	643,30	22500
23,50 - 24,49	25	295	239	203	31	2,0	643,30	23500
24,50 - 25,49	32	309	249	212	38	3,1	694,30	24500
25,50 - 26,49	32	319	259	220	38	3,1	694,30	25500
26,50 - 27,49	32	328	268	228	38	3,1	694,30	26500
27,50 - 28,49	32	338	278	236	38	3,1	694,30	27500
28,50 - 29,49	32	342	282	245	38	5,6	796,60	28500
29,50 - 30,49	32	352	292	253	38	5,6	796,60	29500
30,50 - 31,49	32	361	301	261	38	5,6	878,80	30500
31,50 - 32,49	32	371	311	270	38	5,6	878,80	31500

Interchangeable blade

Blade holder

Torque handle

Differential screw

Spare parts DC	80 022 ... EUR W1		80 020 ... EUR Y7		80 023 ... EUR W1		10 950 ... EUR W2	
14,00 - 14,49	25,15	007	21,08	025	373,50	012	7,16	064
14,50 - 14,99	25,15	007	21,08	025	373,50	012	7,16	064
15,00 - 15,49	25,15	007	21,08	025	373,50	012	7,16	064
15,50 - 16,49	25,15	007	21,08	025	373,50	012	7,16	064
16,50 - 17,49	25,15	007	21,08	025	373,50	012	7,16	064
17,50 - 18,49	25,15	008	21,08	025	399,80	060	7,16	065
18,50 - 19,49	25,15	008	21,08	025	399,80	060	7,16	065
19,50 - 20,49	29,26	010	21,08	025	399,80	060	7,16	066
20,50 - 21,49	29,26	010	21,08	025	399,80	060	7,16	066
21,50 - 22,49	29,26	010	21,08	025	399,80	060	7,16	066
22,50 - 23,49	29,26	010	21,08	025	399,80	060	7,16	066
23,50 - 24,49	29,26	010	21,08	025	399,80	060	7,16	066
24,50 - 25,49	47,24	015	21,08	025	399,80	060	7,16	067
25,50 - 26,49	47,24	015	21,08	025	399,80	060	7,16	067
26,50 - 27,49	47,24	015	21,08	025	399,80	060	7,16	067
27,50 - 28,49	47,24	015	21,08	025	399,80	060	7,16	067
28,50 - 29,49	47,24	015	21,08	025	399,80	060	7,16	068
29,50 - 30,49	47,24	015	21,08	025	399,80	060	7,16	068
30,50 - 31,49	47,24	015	21,08	025	399,80	060	7,16	068
31,50 - 32,49	47,24	015	21,08	025	399,80	060	7,16	068

WTX – Drilling Head for Exchangeable drills

▲ extra long head type



Change UNI	Change P	Change VA	Change GG	Change AL
DPX74S	Ti750	Ti700	TiSi	TiB
DRAGONSKIN				



		SIG 140° Solid carbide		SIG 138° Solid carbide		SIG 138° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
		10 919 ...		10 923 ...		10 921 ...		10 924 ...		10 922 ...	
DC $_{h7/m7}$ mm	OAL mm	EUR W2		EUR W2		EUR W2		EUR W2		EUR W2	
12,0	10,7	108,80	12000	108,80	120	108,80	120	108,80	120	108,80	120
12,1	10,7	108,80	12100	108,80	121	108,80	121	108,80	121	108,80	121
12,2	10,7	108,80	12200	108,80	122	108,80	122	108,80	122	108,80	122
12,3	10,7	108,80	12300	108,80	123	108,80	123	108,80	123	108,80	123
12,4	10,7	108,80	12400	108,80	124	108,80	124	108,80	124	108,80	124
12,5	10,7	108,80	12500	108,80	125	108,80	125	108,80	125	108,80	125
12,6	10,7	108,80	12600	108,80	126	108,80	126	108,80	126	108,80	126
12,7	10,7	108,80	12700	108,80	127	108,80	127	108,80	127	108,80	127
12,8	10,7	108,80	12800	108,80	128	108,80	128	108,80	128	108,80	128
12,9	10,7	108,80	12900	108,80	129	108,80	129	108,80	129	108,80	129
13,0	10,7	108,80	13000	108,80	130	108,80	130	108,80	130	108,80	130
13,1	10,7	108,80	13100	108,80	131	108,80	131	108,80	131	108,80	131
13,2	10,7	108,80	13200	108,80	132	108,80	132	108,80	132	108,80	132
13,3	10,7	108,80	13300	108,80	133	108,80	133	108,80	133	108,80	133
13,4	10,7	108,80	13400	108,80	134	108,80	134	108,80	134	108,80	134
13,5	11,3	108,80	13500	108,80	135	108,80	135	108,80	135	108,80	135
13,6	11,3	108,80	13600	108,80	136	108,80	136	108,80	136	108,80	136
13,7	11,3	108,80	13700	108,80	137	108,80	137	108,80	137	108,80	137
13,8	11,3	108,80	13800	108,80	138	108,80	138	108,80	138	108,80	138
13,9	11,3	108,80	13900	108,80	139	108,80	139	108,80	139	108,80	139
14,0	11,3	108,80	14000	108,80	140	108,80	140	108,80	140	108,80	140
14,1	11,3	108,80	14100	108,80	141	108,80	141	108,80	141	108,80	141
14,2	11,3	108,80	14200	108,80	142	108,80	142	108,80	142	108,80	142
14,3	11,3	108,80	14300	108,80	143	108,80	143	108,80	143	108,80	143
14,4	11,3	108,80	14400	108,80	144	108,80	144	108,80	144	108,80	144
14,5	11,3	108,80	14500	108,80	145	108,80	145	108,80	145	108,80	145
14,6	11,3	108,80	14600	108,80	146	108,80	146	108,80	146	108,80	146
14,7	11,3	108,80	14700	108,80	147	108,80	147	108,80	147	108,80	147
14,8	11,3	108,80	14800	108,80	148	108,80	148	108,80	148	108,80	148
14,9	11,3	108,80	14900	108,80	149	108,80	149	108,80	149	108,80	149
15,0	11,3	108,80	15000	108,80	150	108,80	150	108,80	150	108,80	150
15,1	11,3	108,80	15100	108,80	151	108,80	151	108,80	151	108,80	151
15,2	11,3	108,80	15200	108,80	152	108,80	152	108,80	152	108,80	152
15,3	11,3	108,80	15300	108,80	153	108,80	153	108,80	153	108,80	153
15,4	11,3	108,80	15400	108,80	154	108,80	154	108,80	154	108,80	154
15,5	11,9	108,80	15500	108,80	155	108,80	155	108,80	155	108,80	155
15,6	11,9	113,60	15600	113,60	156	113,60	156	113,60	156	113,60	156
15,7	11,9	113,60	15700	113,60	157	113,60	157	113,60	157	113,60	157

P	●	●	○		
M			●		
K	●	●	●	●	
N					●
S			●		
H					
O					

→ v_c Page 152–155
→ Application recommendation on page 162

Ø DC_{m7} for Type UNI, P, GG und AL / **Ø DC_{h7}** for Type VA

Continued on next page

WTX – Drilling Head for Exchangeable drills

▲ extra long head type



Change UNI	Change P	Change VA	Change GG	Change AL
DPX74S	Ti750	Ti700	TiSi	TiB

DRAGONSKIN



		SIG 140° Solid carbide		SIG 138° Solid carbide		SIG 138° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
		10 919 ...		10 923 ...		10 921 ...		10 924 ...		10 922 ...	
DC $_{h7/m7}$ mm	OAL mm	EUR W2		EUR W2		EUR W2		EUR W2		EUR W2	
15,8	11,9	113,60	15800	113,60	158	113,60	158	113,60	158	113,60	158
15,9	11,9	113,60	15900	113,60	159	113,60	159	113,60	159	113,60	159
16,0	11,9	113,60	16000	113,60	160	113,60	160	113,60	160	113,60	160
16,1	11,9	113,60	16100	113,60	161	113,60	161	113,60	161	113,60	161
16,2	11,9	113,60	16200	113,60	162	113,60	162	113,60	162	113,60	162
16,3	11,9	113,60	16300	113,60	163	113,60	163	113,60	163	113,60	163
16,4	11,9	113,60	16400	113,60	164	113,60	164	113,60	164	113,60	164
16,5	13,4	113,60	16500	113,60	165	113,60	165	113,60	165	113,60	165
16,6	13,4	113,60	16600	113,60	166	113,60	166	113,60	166	113,60	166
16,7	13,4	113,60	16700	113,60	167	113,60	167	113,60	167	113,60	167
16,8	13,4	113,60	16800	113,60	168	113,60	168	113,60	168	113,60	168
16,9	13,4	113,60	16900	113,60	169	113,60	169	113,60	169	113,60	169
17,0	13,4	113,60	17000	113,60	170	113,60	170	113,60	170	113,60	170
17,1	13,4	113,60	17100	113,60	171	113,60	171	113,60	171	113,60	171
17,2	13,4	113,60	17200	113,60	172	113,60	172	113,60	172	113,60	172
17,3	13,4	113,60	17300	113,60	173	113,60	173	113,60	173	113,60	173
17,4	13,4	113,60	17400	113,60	174	113,60	174	113,60	174	113,60	174
17,5	13,4	113,60	17500	113,60	175	113,60	175	113,60	175	113,60	175
17,6	13,4	113,60	17600	113,60	176	113,60	176	113,60	176	113,60	176
17,7	13,4	113,60	17700	113,60	177	113,60	177	113,60	177	113,60	177
17,8	13,4	113,60	17800	113,60	178	113,60	178	113,60	178	113,60	178
17,9	13,4	113,60	17900	113,60	179	113,60	179	113,60	179	113,60	179
18,0	13,4	113,60	18000	113,60	180	113,60	180	113,60	180	113,60	180
18,1	13,4	123,00	18100	123,00	181	123,00	181	123,00	181	123,00	181
18,2	13,4	123,00	18200	123,00	182	123,00	182	123,00	182	123,00	182
18,3	13,4	123,00	18300	123,00	183	123,00	183	123,00	183	123,00	183
18,4	13,4	123,00	18400	123,00	184	123,00	184	123,00	184	123,00	184
18,5	13,4	123,00	18500	123,00	185	123,00	185	123,00	185	123,00	185
18,6	13,4	123,00	18600	123,00	186	123,00	186	123,00	186	123,00	186
18,7	13,4	123,00	18700	123,00	187	123,00	187	123,00	187	123,00	187
18,8	13,4	123,00	18800	123,00	188	123,00	188	123,00	188	123,00	188
18,9	13,4	123,00	18900	123,00	189	123,00	189	123,00	189	123,00	189
19,0	13,4	123,00	19000	123,00	190	123,00	190	123,00	190	123,00	190
19,1	13,4	123,00	19100	123,00	191	123,00	191	123,00	191	123,00	191
19,2	13,4	123,00	19200	123,00	192	123,00	192	123,00	192	123,00	192
19,3	13,4	123,00	19300	123,00	193	123,00	193	123,00	193	123,00	193
19,4	13,4	123,00	19400	123,00	194	123,00	194	123,00	194	123,00	194
19,5	13,4	123,00	19500	123,00	195	123,00	195	123,00	195	123,00	195
P		●		●		○					
M						●					
K		●		●		●		●			
N										●	
S						●					
H											
O											

→ v_c Page 152–155
→ Application recommendation on page 162

Ø DC_{m7} for Type UNI, P, GG und AL / **Ø DC_{h7}** for Type VA

Continued on next page

WTX – Drilling Head for Exchangeable drills

▲ extra long head type



Change UNI	Change P	Change VA	Change GG	Change AL
DPX74S	Ti750	Ti700	TiSi	TiB
DRAGONSKIN				



		SIG 140° Solid carbide	SIG 138° Solid carbide	SIG 138° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
		10 919 ...	10 923 ...	10 921 ...	10 924 ...	10 922 ...
DC $_{h7/m7}$ mm	OAL mm	EUR W2	EUR W2	EUR W2	EUR W2	EUR W2
19,6	13,4	123,00 19600	123,00 196	123,00 196	123,00 196	123,00 196
19,7	13,4	123,00 19700	123,00 197	123,00 197	123,00 197	123,00 197
19,8	13,4	123,00 19800	123,00 198	123,00 198	123,00 198	123,00 198
19,9	13,4	123,00 19900	123,00 199	123,00 199	123,00 199	123,00 199
20,0	13,4	123,00 20000	123,00 200	123,00 200	123,00 200	123,00 200
20,1	13,4	136,50 20100	136,50 201	136,50 201	136,50 201	136,50 201
20,2	13,4	136,50 20200	136,50 202	136,50 202	136,50 202	136,50 202
20,3	13,4	136,50 20300	136,50 203	136,50 203	136,50 203	136,50 203
20,4	13,4	136,50 20400	136,50 204	136,50 204	136,50 204	136,50 204
20,5	15,4	136,50 20500	136,50 205	136,50 205	136,50 205	136,50 205
20,6	15,4	136,50 20600	136,50 206	136,50 206	136,50 206	136,50 206
20,7	15,4	136,50 20700	136,50 207	136,50 207	136,50 207	136,50 207
20,8	15,4	136,50 20800	136,50 208	136,50 208	136,50 208	136,50 208
20,9	15,4	136,50 20900	136,50 209	136,50 209	136,50 209	136,50 209
21,0	15,4	136,50 21000	136,50 210	136,50 210	136,50 210	136,50 210
21,1	15,4	136,50 21100	136,50 211	136,50 211	136,50 211	136,50 211
21,2	15,4	136,50 21200	136,50 212	136,50 212	136,50 212	136,50 212
21,3	15,4	136,50 21300	136,50 213	136,50 213	136,50 213	136,50 213
21,4	15,4	136,50 21400	136,50 214	136,50 214	136,50 214	136,50 214
21,5	15,4	136,50 21500	136,50 215	136,50 215	136,50 215	136,50 215
21,6	15,4	136,50 21600	136,50 216	136,50 216	136,50 216	136,50 216
21,7	15,4	136,50 21700	136,50 217	136,50 217	136,50 217	136,50 217
21,8	15,4	136,50 21800	136,50 218	136,50 218	136,50 218	136,50 218
21,9	15,4	136,50 21900	136,50 219	136,50 219	136,50 219	136,50 219
22,0	15,4	136,50 22000	136,50 220	136,50 220	136,50 220	136,50 220
22,1	15,4	147,70 22100	147,70 221	147,70 221	147,70 221	147,70 221
22,2	15,4	147,70 22200	147,70 222	147,70 222	147,70 222	147,70 222
22,3	15,4	147,70 22300	147,70 223	147,70 223	147,70 223	147,70 223
22,4	15,4	147,70 22400	147,70 224	147,70 224	147,70 224	147,70 224
22,5	15,4	147,70 22500	147,70 225	147,70 225	147,70 225	147,70 225
22,6	15,4	147,70 22600	147,70 226	147,70 226	147,70 226	147,70 226
22,7	15,4	147,70 22700	147,70 227	147,70 227	147,70 227	147,70 227
22,8	15,4	147,70 22800	147,70 228	147,70 228	147,70 228	147,70 228
22,9	15,4	147,70 22900	147,70 229	147,70 229	147,70 229	147,70 229
23,0	15,4	147,70 23000	147,70 230	147,70 230	147,70 230	147,70 230
23,1	15,4	147,70 23100	147,70 231	147,70 231	147,70 231	147,70 231
23,2	15,4	147,70 23200	147,70 232	147,70 232	147,70 232	147,70 232
23,3	15,4	147,70 23300	147,70 233	147,70 233	147,70 233	147,70 233
P		●	●	○		
M				●		
K		●	●	●	●	
N						●
S				●		
H						
O						

→ v_c Page 152–155
→ Application recommendation on page 162

Ø DC_{m7} for Type UNI, P, GG und AL / **Ø DC_{h7}** for Type VA

Continued on next page

WTX – Drilling Head for Exchangeable drills

▲ extra long head type



Change UNI	Change P	Change VA	Change GG	Change AL
DPX74S	Ti750	Ti700	TiSi	TiB

DRAGONSKIN



		SIG 140° Solid carbide		SIG 138° Solid carbide		SIG 138° Solid carbide		SIG 140° Solid carbide		SIG 140° Solid carbide	
		10 919 ...		10 923 ...		10 921 ...		10 924 ...		10 922 ...	
DC $_{h7/m7}$ mm	OAL mm	EUR W2		EUR W2		EUR W2		EUR W2		EUR W2	
23,4	15,4	147,70	23400	147,70	234	147,70	234	147,70	234	147,70	234
23,5	15,4	147,70	23500	147,70	235	147,70	235	147,70	235	147,70	235
23,6	15,4	147,70	23600	147,70	236	147,70	236	147,70	236	147,70	236
23,7	15,4	147,70	23700	147,70	237	147,70	237	147,70	237	147,70	237
23,8	15,4	147,70	23800	147,70	238	147,70	238	147,70	238	147,70	238
23,9	15,4	147,70	23900	147,70	239	147,70	239	147,70	239	147,70	239
24,0	15,4	147,70	24000	147,70	240	147,70	240	147,70	240	147,70	240
24,1	15,4	162,40	24100	162,40	241	162,40	241	162,40	241	162,40	241
24,2	15,4	162,40	24200	162,40	242	162,40	242	162,40	242	162,40	242
24,3	15,4	162,40	24300	162,40	243	162,40	243	162,40	243	162,40	243
24,4	15,4	162,40	24400	162,40	244	162,40	244	162,40	244	162,40	244
24,5	17,4	162,40	24500	162,40	245	162,40	245	162,40	245	162,40	245
24,6	17,4	162,40	24600	162,40	246	162,40	246	162,40	246	162,40	246
24,7	17,4	162,40	24700	162,40	247	162,40	247	162,40	247	162,40	247
24,8	17,4	162,40	24800	162,40	248	162,40	248	162,40	248	162,40	248
24,9	17,4	162,40	24900	162,40	249	162,40	249	162,40	249	162,40	249
25,0	17,4	162,40	25000	162,40	250	162,40	250	162,40	250	162,40	250
25,1	17,4	162,40	25100	162,40	251	162,40	251	162,40	251	162,40	251
25,2	17,4	162,40	25200	162,40	252	162,40	252	162,40	252	162,40	252
25,3	17,4	162,40	25300	162,40	253	162,40	253	162,40	253	162,40	253
25,4	17,4	162,40	25400	162,40	254	162,40	254	162,40	254	162,40	254
25,5	17,4	162,40	25500	162,40	255	162,40	255	162,40	255	162,40	255
25,6	17,4	170,90	25600	170,90	256	170,90	256	170,90	256	170,90	256
25,7	17,4	170,90	25700	170,90	257	170,90	257	170,90	257	170,90	257
25,8	17,4	170,90	25800	170,90	258	170,90	258	170,90	258	170,90	258
25,9	17,4	170,90	25900	170,90	259	170,90	259	170,90	259	170,90	259
26,0	17,4	170,90	26000	170,90	260	170,90	260	170,90	260	170,90	260
26,1	17,4	170,90	26100	170,90	261	170,90	261	170,90	261	170,90	261
26,2	17,4	170,90	26200	170,90	262	170,90	262	170,90	262	170,90	262
26,3	17,4	170,90	26300	170,90	263	170,90	263	170,90	263	170,90	263
26,4	17,4	170,90	26400	170,90	264	170,90	264	170,90	264	170,90	264
26,5	17,4	170,90	26500	170,90	265	170,90	265	170,90	265	170,90	265
26,6	17,4	170,90	26600	170,90	266	170,90	266	170,90	266	170,90	266
26,7	17,4	170,90	26700	170,90	267	170,90	267	170,90	267	170,90	267
26,8	17,4	170,90	26800	170,90	268	170,90	268	170,90	268	170,90	268
26,9	17,4	170,90	26900	170,90	269	170,90	269	170,90	269	170,90	269
27,0	17,4	170,90	27000	170,90	270	170,90	270	170,90	270	170,90	270
27,1	17,4	170,90	27100	170,90	271	170,90	271	170,90	271	170,90	271
P		●		●		○					
M						●					
K		●		●		●		●			
N										●	
S						●					
H											
O											

→ v_c Page 152–155
→ Application recommendation on page 162

Ø DC_{m7} for Type UNI, P, GG und AL / **Ø DC_{h7}** for Type VA

Continued on next page

WTX – Drilling Head for Exchangeable drills

▲ extra long head type



Change UNI	Change P	Change VA	Change GG	Change AL
DPX74S	Ti750	Ti700	TiSi	TiB
DRAGONSKIN				



		SIG 140° Solid carbide	SIG 138° Solid carbide	SIG 138° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
		10 919 ...	10 923 ...	10 921 ...	10 924 ...	10 922 ...
DC $_{h7/m7}$ mm	OAL mm	EUR W2	EUR W2	EUR W2	EUR W2	EUR W2
27,2	17,4	170,90 27200	170,90 272	170,90 272	170,90 272	170,90 272
27,3	17,4	170,90 27300	170,90 273	170,90 273	170,90 273	170,90 273
27,4	17,4	170,90 27400	170,90 274	170,90 274	170,90 274	170,90 274
27,5	17,4	170,90 27500	170,90 275	170,90 275	170,90 275	170,90 275
27,6	17,4	170,90 27600	170,90 276	170,90 276	170,90 276	170,90 276
27,7	17,4	170,90 27700	170,90 277	170,90 277	170,90 277	170,90 277
27,8	17,4	170,90 27800	170,90 278	170,90 278	170,90 278	170,90 278
27,9	17,4	170,90 27900	170,90 279	170,90 279	170,90 279	170,90 279
28,0	17,4	170,90 28000	170,90 280	170,90 280	170,90 280	170,90 280
28,1	17,4	187,00 28100	187,00 281	187,00 281	187,00 281	187,00 281
28,2	17,4	187,00 28200	187,00 282	187,00 282	187,00 282	187,00 282
28,3	17,4	187,00 28300	187,00 283	187,00 283	187,00 283	187,00 283
28,4	17,4	187,00 28400	187,00 284	187,00 284	187,00 284	187,00 284
28,5	18,4	187,00 28500	187,00 285	187,00 285	187,00 285	187,00 285
28,6	18,4	187,00 28600	187,00 286	187,00 286	187,00 286	187,00 286
28,7	18,4	187,00 28700	187,00 287	187,00 287	187,00 287	187,00 287
28,8	18,4	187,00 28800	187,00 288	187,00 288	187,00 288	187,00 288
28,9	18,4	187,00 28900	187,00 289	187,00 289	187,00 289	187,00 289
29,0	18,4	187,00 29000	187,00 290	187,00 290	187,00 290	187,00 290
29,1	18,4	187,00 29100	187,00 291	187,00 291	187,00 291	187,00 291
29,2	18,4	187,00 29200	187,00 292	187,00 292	187,00 292	187,00 292
29,3	18,4	187,00 29300	187,00 293	187,00 293	187,00 293	187,00 293
29,4	18,4	187,00 29400	187,00 294	187,00 294	187,00 294	187,00 294
29,5	18,4	187,00 29500	187,00 295	187,00 295	187,00 295	187,00 295
29,6	18,4	187,00 29600	187,00 296	187,00 296	187,00 296	187,00 296
29,7	18,4	187,00 29700	187,00 297	187,00 297	187,00 297	187,00 297
29,8	18,4	187,00 29800	187,00 298	187,00 298	187,00 298	187,00 298
29,9	18,4	187,00 29900	187,00 299	187,00 299	187,00 299	187,00 299
30,0	18,4	187,00 30000	187,00 300	187,00 300	187,00 300	187,00 300
30,1	18,4	207,20 30100	207,20 301	207,20 301	207,20 301	207,20 301
30,2	18,4	207,20 30200	207,20 302	207,20 302	207,20 302	207,20 302
30,3	18,4	207,20 30300	207,20 303	207,20 303	207,20 303	207,20 303
30,4	18,4	207,20 30400	207,20 304	207,20 304	207,20 304	207,20 304
30,5	18,4	207,20 30500	207,20 305	207,20 305	207,20 305	207,20 305
30,6	18,4	207,20 30600	207,20 306	207,20 306	207,20 306	207,20 306
30,7	18,4	207,20 30700	207,20 307	207,20 307	207,20 307	207,20 307
30,8	18,4	207,20 30800	207,20 308	207,20 308	207,20 308	207,20 308
30,9	18,4	207,20 30900	207,20 309	207,20 309	207,20 309	207,20 309
P		●	●	○		
M				●		
K		●	●	●	●	
N						●
S				●		
H						
O						

→ v_c Page 152–155
→ Application recommendation on page 162

Ø DC_{m7} for Type UNI, P, GG und AL / **Ø DC_{h7}** for Type VA

Continued on next page

WTX – Drilling Head for Exchangeable drills

▲ extra long head type



Change UNI	Change P	Change VA	Change GG	Change AL
DPX74S	Ti750	Ti700	TiSi	TiB

DRAGONSKIN



		SIG 140° Solid carbide	SIG 138° Solid carbide	SIG 138° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
		10 919 ...	10 923 ...	10 921 ...	10 924 ...	10 922 ...
DC $_{h7/m7}$ mm	OAL mm	EUR W2	EUR W2	EUR W2	EUR W2	EUR W2
31,0	18,4	207,20 31000	207,20 310	207,20 310	207,20 310	207,20 310
31,1	18,4	207,20 31100	207,20 311	207,20 311	207,20 311	207,20 311
31,2	18,4	207,20 31200	207,20 312	207,20 312	207,20 312	207,20 312
31,3	18,4	207,20 31300	207,20 313	207,20 313	207,20 313	207,20 313
31,4	18,4	207,20 31400	207,20 314	207,20 314	207,20 314	207,20 314
31,5	18,4	207,20 31500	207,20 315	207,20 315	207,20 315	207,20 315
31,6	18,4	207,20 31600	207,20 316	207,20 316	207,20 316	207,20 316
31,7	18,4	207,20 31700	207,20 317	207,20 317	207,20 317	207,20 317
31,8	18,4	207,20 31800	207,20 318	207,20 318	207,20 318	207,20 318
31,9	18,4	207,20 31900	207,20 319	207,20 319	207,20 319	207,20 319
32,0	18,4	207,20 32000	207,20 320	207,20 320	207,20 320	207,20 320
32,5	24,3	288,30 32500	288,30 325			
33,0	24,3	288,30 33000	288,30 330			
33,5	24,3	288,30 33500	288,30 335			
34,0	24,3	288,30 34000	288,30 340			
34,5	24,3	288,30 34500	288,30 345			
35,0	24,3	288,30 35000	288,30 350			
35,5	26,3	327,50 35500	327,50 355			
36,0	26,3	327,50 36000	327,50 360			
36,5	26,3	327,50 36500	327,50 365			
37,0	26,3	327,50 37000	327,50 370			
37,5	26,3	327,50 37500	327,50 375			
38,0	26,3	327,50 38000	327,50 380			
38,5	26,3	356,40 38500	356,40 385			
39,0	26,3	356,40 39000	356,40 390			
39,5	26,3	356,40 39500	356,40 395			
40,0	26,3	356,40 40000	356,40 400			
40,5	26,3	356,40 40500	356,40 405			
41,0	26,3	356,40 41000	356,40 410			
P		●	●	○		
M				●		
K		●	●	●	●	
N						●
S				●		
H						
O						

→ v_c Page 152–155
→ Application recommendation on page 162

Ø DC_{m7} for Type UNI, P, GG und AL / **Ø DC_{h7}** for Type VA

When changing the head, please observe the specified tightening torque.

WTX – Holder for Exchangeable drills

▲ with radial teeth

Scope of supply:
Holder incl. screw driver

≤ 1xD

Change



DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	torque moment Nm	10 911 ... EUR W1	
12,00 - 12,49	14	81	29	12,5	1,0	256,90	120
12,50 - 12,99	14	81	29	13,0	1,0	256,90	125
13,00 - 13,49	14	81	31	13,5	1,0	256,90	130
13,50 - 13,99	16	86	32	14,0	1,3	256,90	135
14,00 - 14,49	16	86	33	14,5	1,3	256,90	140
14,50 - 14,99	16	91	34	15,0	1,3	256,90	145
15,00 - 15,49	16	91	36	15,5	1,3	256,90	150
15,50 - 16,49	20	97	38	16,5	1,3	266,20	161
15,50 - 16,49	18	92	38	16,5	1,3	266,20	160
16,50 - 17,49	20	99	40	17,5	3,5	266,20	166
16,50 - 17,49	18	94	40	17,5	3,5	266,20	165
17,50 - 18,49	20	104	43	18,5	3,5	266,20	176
17,50 - 18,49	18	99	43	18,5	3,5	266,20	175
18,50 - 19,49	20	99	45	19,5	3,5	314,90	185
19,50 - 20,49	20	104	47	20,5	3,5	314,90	195
20,50 - 21,49	25	111	49	21,5	3,5	347,50	205
21,50 - 22,49	25	116	52	22,5	3,5	347,50	215
22,50 - 23,49	25	116	54	23,5	3,5	381,30	225
23,50 - 24,49	25	121	56	24,5	4,0	381,30	235
24,50 - 25,49	25	123	59	25,5	4,0	413,60	245
25,50 - 26,49	25	123	61	26,5	4,0	413,60	255
26,50 - 27,49	25	128	63	27,5	4,0	413,60	265
27,50 - 28,49	25	128	66	28,5	4,0	413,60	275
28,50 - 29,49	32	134	68	29,5	4,0	480,00	285
29,50 - 30,49	32	139	70	30,5	4,0	480,00	295
30,50 - 31,49	32	139	75	31,5	4,0	530,00	305
31,50 - 32,49	32	139	75	32,5	4,0	530,00	315
32,50 - 33,49	32	150	78	33,5	6,0	570,50	325
33,50 - 34,49	32	150	79	34,5	6,0	570,50	335
34,50 - 35,49	32	150	82	35,5	6,0	570,50	345
35,50 - 37,49	32	152	86	37,5	6,0	658,40	355
37,50 - 39,49	32	157	91	39,5	6,0	681,40	375
39,50 - 41,00	32	167	95	41,5	6,0	699,00	395

WTX – Holder for Exchangeable drills

▲ with radial teeth

Scope of supply:
Holder incl. screw driver

≤ 3xD

Change



DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	torque moment Nm	10 913 ... EUR W1	
12,00 - 12,49	14	100	53	38,0	1,0	283,90	120
12,50 - 12,99	14	105	55	39,0	1,0	283,90	125
13,00 - 13,49	14	105	57	40,0	1,0	283,90	130
13,50 - 13,99	16	110	59	42,0	1,3	283,90	135
14,00 - 14,49	16	115	61	43,0	1,3	283,90	140
14,50 - 14,99	16	115	63	45,0	1,3	283,90	145
15,00 - 15,49	16	115	65	46,0	1,3	283,90	150
15,50 - 16,49	18	120	70	50,0	1,3	290,80	160
15,50 - 16,49	20	125	70	50,0	1,3	290,80	161
16,50 - 17,49	18	125	74	53,0	3,5	290,80	165
16,50 - 17,49	20	130	74	50,0	3,5	290,80	166
17,50 - 18,49	18	130	78	55,0	3,5	290,80	175
17,50 - 18,49	20	135	78	50,0	3,5	290,80	176
18,50 - 19,49	20	135	82	58,0	3,5	347,50	185
19,50 - 20,49	20	140	87	62,0	3,5	347,50	195
20,50 - 21,49	25	150	91	65,0	3,5	386,70	205
21,50 - 22,49	25	155	95	67,0	3,5	386,70	215
22,50 - 23,49	25	160	99	70,0	3,5	421,70	225
23,50 - 24,49	25	165	103	73,0	3,5	421,70	235
24,50 - 25,49	25	165	108	77,0	4,0	459,80	245
25,50 - 26,49	25	175	112	80,0	4,0	459,80	255
26,50 - 27,49	25	175	116	82,0	4,0	459,80	265
27,50 - 28,49	25	180	120	85,0	4,0	459,80	275
28,50 - 29,49	32	190	124	88,0	4,0	532,60	285
29,50 - 30,49	32	195	129	92,0	4,0	532,60	295
30,50 - 31,49	32	195	133	94,0	4,0	588,20	305
31,50 - 32,49	32	200	137	97,0	4,0	588,20	315
32,50 - 33,49	32	210	144	100,5	6,0	665,20	325
33,50 - 34,49	32	215	148	103,5	6,0	665,20	335
34,50 - 35,49	32	220	153	106,5	6,0	665,20	345
35,50 - 37,49	32	227	161	112,5	6,0	763,80	355
37,50 - 39,49	32	237	170	118,5	6,0	793,70	375
39,50 - 41,00	32	247	178	124,5	6,0	812,50	395

Screw driver



Screw driver

Grub screw

Spare parts DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W1	
12,00 - 12,49	SW 1,3	4,24	132				M2,5 x 0,45 x 5	2,78	025
12,50 - 13,49	SW 1,3	4,24	132				M2,5 x 0,45 x 6	2,78	026
13,50 - 14,49				SW 1,5	5,29	133	M3 x 0,5 x 6	2,78	031
14,50 - 16,49				SW 1,5	5,29	133	M3 x 0,5 x 7	2,78	030
16,50 - 20,49				SW 2	5,04	134	M4 x 0,5 x 7,5	2,78	040
20,50 - 24,49				SW 2	5,04	134	M4 x 0,5 x 10	2,78	041
24,50 - 28,49				SW 2,5	4,85	135	M5 x 0,5 x 11	2,78	050
28,50 - 32,49				SW 2,5	4,85	135	M5 x 0,5 x 14	2,78	051
32,50 - 35,49				SW 3	4,85	136	M6 x 0,5 x 16	5,04	060
35,50 - 39,49				SW 3	4,85	136	M6 x 0,5 x 18	5,04	061
39,50 - 41,00				SW 3	4,85	136	M6 x 0,5 x 20	5,04	062

WTX – Holder for Exchangeable drills

▲ with radial teeth

Scope of supply:
Holder incl. screw driver







DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	torque moment Nm	10 915 ... EUR W1	
12,00 - 12,49	14	125	78	62,0	1,0	323,10	120
12,50 - 12,99	14	130	81	65,0	1,0	323,10	125
13,00 - 13,49	14	130	84	67,0	1,0	323,10	130
13,50 - 13,99	16	140	88	70,0	1,3	323,10	135
14,00 - 14,49	16	140	90	72,0	1,3	323,10	140
14,50 - 14,99	16	145	94	75,0	1,3	323,10	145
15,00 - 15,49	16	145	96	77,0	1,3	323,10	150
15,50 - 16,49	18	155	103	82,0	1,3	347,50	160
15,50 - 16,49	20	160	103	82,0	1,3	347,50	161
16,50 - 17,49	18	160	109	87,0	3,5	347,50	165
16,50 - 17,49	20	165	109	87,0	3,5	347,50	166
17,50 - 18,49	18	165	115	92,0	3,5	347,50	175
17,50 - 18,49	20	170	115	92,0	3,5	347,50	176
18,50 - 19,49	20	175	121	97,0	3,5	404,20	185
19,50 - 20,49	20	180	128	102,0	3,5	404,20	195
20,50 - 21,49	25	195	134	107,0	3,5	440,70	205
21,50 - 22,49	25	200	140	112,0	3,5	440,70	215
22,50 - 23,49	25	205	146	117,0	3,5	477,20	225
23,50 - 24,49	25	210	152	122,0	3,5	477,20	235
24,50 - 25,49	25	220	159	127,0	4,0	512,30	245
25,50 - 26,49	25	225	165	132,0	4,0	512,30	255
26,50 - 27,49	25	230	171	137,0	4,0	512,30	265
27,50 - 28,49	25	240	177	142,0	4,0	512,30	275
28,50 - 29,49	32	250	183	146,0	4,0	588,20	285
29,50 - 30,49	32	255	190	152,0	4,0	588,20	295
30,50 - 31,49	32	260	196	157,0	4,0	642,00	305
31,50 - 32,49	32	265	202	162,0	4,0	642,00	315
32,50 - 33,49	32	275	210	167,5	6,0	751,70	325
33,50 - 34,49	32	285	217	172,5	6,0	751,70	335
34,50 - 35,49	32	290	224	177,5	6,0	751,70	345
35,50 - 37,49	32	302	236	187,5	6,0	845,00	355
37,50 - 39,49	32	317	249	197,5	6,0	877,30	375
39,50 - 41,00	32	327	261	207,5	6,0	896,40	395

WTX – Holder for Exchangeable drills

▲ Pilot hole is recommended
▲ With radial teeth

Scope of supply:
Holder incl. screw driver





DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	torque moment Nm	10 918 ... EUR W1	
12,00 - 12,49	14	165	116	100	1,0	396,20	120
12,50 - 12,99	14	170	121	104	1,0	396,20	125
13,00 - 13,49	14	175	126	108	1,0	396,20	130
13,50 - 13,99	16	180	129	111	1,3	396,20	135
14,00 - 14,49	16	185	134	115	1,3	396,20	140
14,50 - 14,99	16	190	139	120	1,3	396,20	145
15,00 - 15,49	16	195	144	124	1,3	396,20	150
15,50 - 16,49	18	205	152	131	1,3	404,20	160
15,50 - 16,49	20	210	152	131	1,3	404,20	161
16,50 - 17,49	18	215	161	138	3,5	404,20	165
16,50 - 17,49	20	220	161	138	3,5	404,20	166
17,50 - 18,49	18	220	171	147	3,5	404,20	175
17,50 - 18,49	20	225	171	147	3,5	404,20	176
18,50 - 19,49	20	235	180	155	3,5	459,80	185
19,50 - 20,49	20	240	189	163	3,5	459,80	195
20,50 - 21,49	25	260	198	170	3,5	497,60	205
21,50 - 22,49	25	270	207	178	3,5	497,60	215
22,50 - 23,49	25	275	217	187	3,5	551,60	225
23,50 - 24,49	25	285	226	194	3,5	551,60	235
24,50 - 25,49	25	295	235	202	4,0	623,20	245
25,50 - 26,49	25	305	244	210	4,0	623,20	255
26,50 - 27,49	25	315	253	218	4,0	623,20	265
27,50 - 28,49	25	325	263	226	4,0	623,20	275
28,50 - 29,49	32	340	272	234	4,0	715,10	285
29,50 - 30,49	32	345	281	242	4,0	715,10	295
30,50 - 31,49	32	355	290	249	4,0	789,60	305
31,50 - 32,00	32	360	299	257	4,0	789,60	315

Spare parts

DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W1	
12,00 - 12,49	SW 1,3	4,24	132				M2,5 x 0,45 x 5	2,78	025
12,50 - 13,49	SW 1,3	4,24	132				M2,5 x 0,45 x 6	2,78	026
13,50 - 14,49				SW 1,5	5,29	133	M3 x 0,5 x 6	2,78	031
14,50 - 16,49				SW 1,5	5,29	133	M3 x 0,5 x 7	2,78	030
16,50 - 20,49				SW 2	5,04	134	M4 x 0,5 x 7,5	2,78	040
20,50 - 24,49				SW 2	5,04	134	M4 x 0,5 x 10	2,78	041
24,50 - 28,49				SW 2,5	4,85	135	M5 x 0,5 x 11	2,78	050
28,50 - 32,49				SW 2,5	4,85	135	M5 x 0,5 x 14	2,78	051
32,50 - 35,49				SW 3	4,85	136	M6 x 0,5 x 16	5,04	060
35,50 - 39,49				SW 3	4,85	136	M6 x 0,5 x 18	5,04	061
39,50 - 41,00				SW 3	4,85	136	M6 x 0,5 x 20	5,04	062

WTX – Holder for Exchangeable drills

2

▲ Pilot hole is recommended
▲ With radial teeth

Scope of supply:
Holder incl. screw driver





						10 912 ...	
DC mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	torque moment Nm	EUR W1	
12,00 - 12,49	14	210	162	150	1,0	577,50	12000
12,50 - 12,99	14	216	168	156	1,0	577,50	12500
13,00 - 13,49	14	223	175	162	1,0	577,50	13000
13,50 - 13,99	16	235	182	168	1,3	577,50	13500
14,00 - 14,49	16	242	189	174	1,3	577,50	14000
14,50 - 14,99	16	248	195	180	1,3	577,50	14500
15,00 - 15,49	16	255	202	186	1,3	577,50	15000
15,50 - 16,49	18	262	209	198	1,3	629,20	15500
16,50 - 17,49	18	275	222	210	3,5	629,20	16500
17,50 - 18,49	18	289	236	222	3,5	629,20	17500
18,50 - 19,49	20	304	249	234	3,5	762,40	18500
19,50 - 20,49	20	318	263	246	3,5	762,40	19500
20,50 - 21,49	25	337	276	258	3,5	823,60	20500
21,50 - 22,49	25	351	290	270	3,5	823,60	21500
22,50 - 23,49	25	364	303	282	3,5	915,10	22500
23,50 - 24,49	25	378	317	294	3,5	915,10	23500
24,50 - 25,49	25	391	330	306	4,0	1.037,00	24500
25,50 - 26,49	25	405	344	318	4,0	1.037,00	25500
26,50 - 27,49	25	418	357	330	4,0	1.037,00	26500
27,50 - 28,49	25	432	371	342	4,0	1.037,00	27500
28,50 - 29,49	32	449	384	354	4,0	1.190,00	28500
29,50 - 30,49	32	463	398	366	4,0	1.190,00	29500
30,50 - 31,49	32	476	411	378	4,0	1.313,00	30500
31,50 - 32,00	32	490	425	390	4,0	1.313,00	31500

Screw driver

Screw driver

Grub screw

Spare parts DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W1	
12,00 - 12,49	SW 1,3	4,24	132				M2,5 x 0,45 x 5	2,78	025
12,50 - 13,49	SW 1,3	4,24	132				M2,5 x 0,45 x 6	2,78	026
13,50 - 14,49				SW 1,5	5,29	133	M3 x 0,5 x 6	2,78	031
14,50 - 16,49				SW 1,5	5,29	133	M3 x 0,5 x 7	2,78	030
16,50 - 20,49				SW 2	5,04	134	M4 x 0,5 x 7,5	2,78	040
20,50 - 24,49				SW 2	5,04	134	M4 x 0,5 x 10	2,78	041
24,50 - 28,49				SW 2,5	4,85	135	M5 x 0,5 x 11	2,78	050
28,50 - 32,49				SW 2,5	4,85	135	M5 x 0,5 x 14	2,78	051
32,50 - 35,49				SW 3	4,85	136	M6 x 0,5 x 16	5,04	060
35,50 - 39,49				SW 3	4,85	136	M6 x 0,5 x 18	5,04	061
39,50 - 41,00				SW 3	4,85	136	M6 x 0,5 x 20	5,04	062

WPC – Indexable insert for indexable insert drill

Scope of supply:

Indexable insert (clamping screws can be ordered separately, if necessary)

NEW

Change UNI

TPX74S



SIG 135°

HM

DC m7 mm	OAL mm	LPR mm	S mm	11 910 ... EUR TS	
14,0	12,8	7,73	5,00	89,75	14000
14,1	12,8	7,73	5,00	89,75	14100
14,2	12,8	7,73	5,00	89,75	14200
14,3	12,8	7,73	5,00	89,75	14300
14,4	12,8	7,73	5,00	89,75	14400
14,5	13,1	7,84	5,00	89,75	14500
14,6	13,1	7,84	5,00	89,75	14600
14,7	13,1	7,84	5,00	89,75	14700
14,8	13,1	7,84	5,00	91,13	14800
14,9	13,1	7,84	5,00	91,13	14900
15,0	13,4	7,95	5,00	91,13	15000
15,1	13,4	7,95	5,00	91,13	15100
15,2	13,4	7,95	5,00	91,13	15200
15,3	13,4	7,95	5,00	91,13	15300
15,4	13,4	7,95	5,00	91,13	15400
15,5	13,7	8,05	5,00	91,13	15500
15,6	13,7	8,05	5,00	91,13	15600
15,7	13,7	8,05	5,00	91,13	15700
15,8	13,7	8,05	5,00	96,67	15800
15,9	13,7	8,05	5,00	96,67	15900
16,0	14,4	9,06	5,80	96,67	16000
16,1	14,4	9,06	5,80	96,67	16100
16,2	14,4	9,06	5,80	96,67	16200
16,3	14,4	9,06	5,80	96,67	16300
16,4	14,4	9,06	5,80	96,67	16400
16,5	14,7	9,17	5,80	96,67	16500
16,6	14,7	9,17	5,80	96,67	16600
16,7	14,7	9,17	5,80	96,67	16700
16,8	14,7	9,17	5,80	98,98	16800
16,9	14,7	9,17	5,80	98,98	16900
17,0	15,0	9,28	5,80	98,98	17000
17,1	15,0	9,28	5,80	98,98	17100
17,2	15,0	9,28	5,80	98,98	17200
17,3	15,0	9,28	5,80	98,98	17300
17,4	15,0	9,28	5,80	98,98	17400
17,5	15,3	9,39	5,80	98,98	17500
17,6	15,3	9,39	5,80	98,98	17600
17,7	15,3	9,39	5,80	98,98	17700
17,8	15,3	9,39	5,80	101,30	17800
17,9	15,3	9,39	5,80	101,30	17900
18,0	16,3	10,19	6,50	101,30	18000
18,1	16,3	10,19	6,50	101,30	18100
18,2	16,3	10,19	6,50	101,30	18200
18,3	16,3	10,19	6,50	101,30	18300
18,4	16,3	10,19	6,50	101,30	18400
18,5	16,6	10,30	6,50	101,30	18500
18,6	16,6	10,30	6,50	101,30	18600
18,7	16,6	10,30	6,50	101,30	18700
18,8	16,6	10,30	6,50	104,30	18800
18,9	16,6	10,30	6,50	104,30	18900
19,0	16,9	10,41	6,50	104,30	19000
19,1	16,9	10,41	6,50	104,30	19100
19,2	16,9	10,41	6,50	104,30	19200
19,3	16,9	10,41	6,50	104,30	19300
19,4	16,9	10,41	6,50	104,30	19400
19,5	17,2	10,52	6,50	104,30	19500
19,6	17,2	10,52	6,50	104,30	19600
19,7	17,2	10,52	6,50	104,30	19700
19,8	17,2	10,52	6,50	107,70	19800
19,9	17,2	10,52	6,50	107,70	19900

DC m7 mm	OAL mm	LPR mm	S mm	11 910 ... EUR TS	
20,0	18,2	11,33	7,20	107,70	20000
20,1	18,2	11,33	7,20	107,70	20100
20,2	18,2	11,33	7,20	107,70	20200
20,3	18,2	11,33	7,20	107,70	20300
20,4	18,2	11,33	7,20	107,70	20400
20,5	18,5	11,43	7,20	107,70	20500
20,6	18,5	11,43	7,20	107,70	20600
20,7	18,5	11,43	7,20	107,70	20700
20,8	18,5	11,43	7,20	110,70	20800
20,9	18,5	11,43	7,20	110,70	20900
21,0	18,8	11,54	7,20	110,70	21000
21,1	18,8	11,54	7,20	110,70	21100
21,2	18,8	11,54	7,20	110,70	21200
21,3	18,8	11,54	7,20	110,70	21300
21,4	18,8	11,54	7,20	110,70	21400
21,5	19,1	11,65	7,20	110,70	21500
21,6	19,1	11,65	7,20	110,70	21600
21,7	19,1	11,65	7,20	110,70	21700
21,8	19,1	11,65	7,20	113,30	21800
21,9	19,1	11,65	7,20	113,30	21900
22,0	20,2	12,56	7,90	113,30	22000
22,1	20,2	12,56	7,90	113,30	22100
22,2	20,2	12,56	7,90	113,30	22200
22,3	20,2	12,56	7,90	113,30	22300
22,4	20,2	12,56	7,90	113,30	22400
22,5	20,5	12,67	7,90	113,30	22500
22,6	20,5	12,67	7,90	113,30	22600
22,7	20,5	12,67	7,90	113,30	22700
22,8	20,5	12,67	7,90	117,60	22800
22,9	20,5	12,67	7,90	117,60	22900
23,0	20,8	12,78	7,90	117,60	23000
23,1	20,8	12,78	7,90	117,60	23100
23,2	20,8	12,78	7,90	117,60	23200
23,3	20,8	12,78	7,90	117,60	23300
23,4	20,8	12,78	7,90	117,60	23400
23,5	21,1	12,88	7,90	117,60	23500
23,6	21,1	12,88	7,90	117,60	23600
23,7	21,1	12,88	7,90	117,60	23700
23,8	21,1	12,88	7,90	124,00	23800
23,9	21,1	12,88	7,90	124,00	23900
24,0	22,1	13,69	8,60	124,00	24000
24,1	22,1	13,69	8,60	124,00	24100
24,2	22,1	13,69	8,60	124,00	24200
24,3	22,1	13,69	8,60	124,00	24300
24,4	22,1	13,69	8,60	124,00	24400
24,5	22,4	13,80	8,60	124,00	24500
24,6	22,4	13,80	8,60	124,00	24600
24,7	22,4	13,80	8,60	124,00	24700
24,8	22,4	13,80	8,60	131,10	24800
24,9	22,4	13,80	8,60	131,10	24900
25,0	22,7	13,91	8,60	131,10	25000
25,1	22,7	13,91	8,60	131,10	25100
25,2	22,7	13,91	8,60	131,10	25200
25,3	22,7	13,91	8,60	131,10	25300
25,4	22,7	13,91	8,60	131,10	25400
25,5	23,0	14,02	8,60	131,10	25500
25,6	23,0	14,02	8,60	131,10	25600
25,7	23,0	14,02	8,60	131,10	25700
25,8	23,0	14,02	8,60	137,90	25800
25,9	23,0	14,02	8,60	137,90	25900
26,0	24,1	14,92	9,40	137,90	26000
26,5	24,4	15,03	9,40	137,90	26500
27,0	24,7	15,14	9,40	148,30	27000
27,5	25,0	15,25	9,40	148,30	27500
28,0	25,3	15,36	9,40	148,30	28000
28,5	25,6	15,47	9,40	154,60	28500
29,0	25,9	15,57	9,40	154,60	29000
29,5	26,2	15,68	9,40	160,40	29500
30,0	26,2	15,49	9,40	160,40	30000

P	●
M	
K	●
N	
S	
H	
O	

→ v_c Page 157

→ Application recommendation on page 163

When changing inserts, please observe the specified tightening torque.

WPC – Holder for indexable insert drill

▲ Easy handling
▲ Insert can be changed in the machine
▲ Precise and stable insert seat, clamping via Torx Plus® screw

Scope of supply:
Holder incl. clamping screw

≤ 3xD

NEW
Change

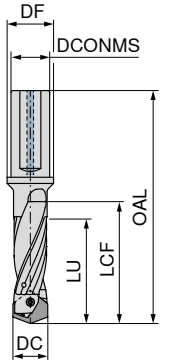

DC mm	DCONMS mm	OAL mm	LCF mm	LU mm	DF mm	torque moment Nm	11 903 ... EUR TT	
14,00 - 14,49	16	108,9	50,8	43,5	20	0.9	264,40	14000
14,50 - 14,99	16	111,0	52,5	45,0	20	0.9	264,40	14500
15,00 - 15,49	20	115,1	54,3	46,5	25	0.9	264,40	15000
15,50 - 15,99	20	117,2	56,0	48,0	25	0.9	264,40	15500
16,00 - 16,49	20	119,3	57,8	49,5	25	1.2	290,10	16000
16,50 - 16,99	20	121,4	59,5	51,0	25	1.2	290,10	16500
17,00 - 17,49	20	123,5	61,3	52,5	25	1.2	290,10	17000
17,50 - 17,99	20	125,6	63,0	54,0	25	1.2	290,10	17500
18,00 - 18,49	20	127,7	64,8	55,5	25	2.2	309,30	18000
18,50 - 18,99	20	129,8	66,5	57,0	25	2.2	309,30	18500
19,00 - 19,49	25	137,9	68,3	58,5	30	2.2	309,30	19000
19,50 - 19,99	25	140,0	70,0	60,0	30	2.2	309,30	19500
20,00 - 20,49	25	142,1	71,8	61,5	30	2.2	328,50	20000
20,50 - 20,99	25	144,2	73,5	63,0	30	2.2	328,50	20500
21,00 - 21,49	25	146,3	75,3	64,5	30	2.2	357,30	21000
21,50 - 21,99	25	148,4	77,0	66,0	30	2.2	362,40	21500
22,00 - 22,49	25	150,5	78,8	67,5	30	3.2	367,50	22000
22,50 - 22,99	25	152,6	80,5	69,0	30	3.2	372,50	22500
23,00 - 23,49	25	154,7	82,3	70,5	30	3.2	377,80	23000
23,50 - 23,99	25	156,8	84,0	72,0	30	3.2	382,80	23500
24,00 - 24,49	32	162,9	85,8	73,5	39	5	387,90	24000
24,50 - 24,99	32	165,0	87,5	75,0	39	5	393,00	24500
25,00 - 25,49	32	167,1	89,3	76,5	39	5	398,10	25000
25,50 - 25,99	32	169,2	91,0	78,0	39	5	403,20	25500
26,00 - 26,49	32	171,3	92,8	79,5	39	6	408,30	26000
26,50 - 26,99	32	173,4	94,5	81,0	39	6	413,40	26500
27,00 - 27,49	32	175,5	96,3	82,5	39	6	418,50	27000
27,50 - 27,99	32	177,6	98,0	84,0	39	6	423,50	27500
28,00 - 28,49	32	179,7	99,8	85,5	39	6	428,80	28000
28,50 - 28,99	32	181,8	101,5	87,0	39	6	433,90	28500
29,00 - 29,49	32	183,9	103,3	88,5	39	6	438,90	29000
29,50 - 30,00	32	186,0	105,0	90,0	39	6	444,10	29500

WPC – Holder for indexable insert drill

▲ Easy handling
▲ Insert can be changed in the machine
▲ Precise and stable insert seat, clamping via Torx Plus® screw

Scope of supply:
Holder incl. clamping screw

≤ 5xD

NEW
Change



DC mm	DCONMS mm	OAL mm	LCF mm	LU mm	DF mm	torque moment Nm	11 905 ... EUR TT	
14,00 - 14,49	16	137,9	79,8	72,5	20	0.9	286,50	14000
14,50 - 14,99	16	141,0	82,5	75,0	20	0.9	286,50	14500
15,00 - 15,49	20	146,1	85,3	77,5	25	0.9	286,50	15000
15,50 - 15,99	20	149,2	88,0	80,0	25	0.9	286,50	15500
16,00 - 16,49	20	152,3	90,8	82,5	25	1.2	312,00	16000
16,50 - 16,99	20	155,4	93,5	85,0	25	1.2	312,00	16500
17,00 - 17,49	20	158,5	96,3	87,5	25	1.2	312,00	17000
17,50 - 17,99	20	161,6	99,0	90,0	25	1.2	312,00	17500
18,00 - 18,49	20	164,7	101,8	92,5	25	2.2	331,90	18000
18,50 - 18,99	20	167,8	104,5	95,0	25	2.2	331,90	18500
19,00 - 19,49	25	176,9	107,3	97,5	30	2.2	331,90	19000
19,50 - 19,99	25	180,0	110,0	100,0	30	2.2	331,90	19500
20,00 - 20,49	25	183,1	112,8	102,5	30	2.2	350,60	20000
20,50 - 20,99	25	186,2	115,5	105,0	30	2.2	350,60	20500
21,00 - 21,49	25	189,3	118,3	107,5	30	2.2	380,50	21000
21,50 - 21,99	25	192,4	121,0	110,0	30	2.2	385,50	21500
22,00 - 22,49	25	195,5	123,8	112,5	30	3.2	390,60	22000
22,50 - 22,99	25	198,6	126,5	115,0	30	3.2	395,70	22500
23,00 - 23,49	25	201,7	129,3	117,5	30	3.2	400,90	23000
23,50 - 23,99	25	204,8	132,0	120,0	30	3.2	405,90	23500
24,00 - 24,49	32	211,9	134,8	122,5	39	5	411,10	24000
24,50 - 24,99	32	215,0	137,5	125,0	39	5	416,20	24500
25,00 - 25,49	32	218,1	140,3	127,5	39	5	421,30	25000
25,50 - 25,99	32	221,2	143,0	130,0	39	5	426,50	25500
26,00 - 26,49	32	224,3	145,8	132,5	39	6	431,50	26000
26,50 - 26,99	32	227,4	148,5	135,0	39	6	436,60	26500
27,00 - 27,49	32	230,5	151,3	137,5	39	6	441,70	27000
27,50 - 27,99	32	233,6	154,0	140,0	39	6	446,90	27500
28,00 - 28,49	32	236,7	156,8	142,5	39	6	451,90	28000
28,50 - 28,99	32	239,8	159,5	145,0	39	6	457,00	28500
29,00 - 29,49	32	242,9	162,3	147,5	39	6	462,20	29000
29,50 - 30,00	32	246,0	165,0	150,0	39	6	467,20	29500

Screwdriver

Replaceable Blade for TORX PLUS®

Torque screwdrivers

Clamping screw

Spare parts

DC		80 950 ... EUR Y7			80 950 ... EUR Y7			80 950 ... EUR Y7			11 950 ... EUR TT	
14,00 - 15,99	T08 - IP	7,61	060	T08 - IP	6,13	043	0,5 - 2,0 Nm	153,30	191	M2,2x13 - 08IP	15,32	00100
16,00 - 17,99	T08 - IP	7,61	060	T08 - IP	6,13	043	0,5 - 2,0 Nm	153,30	191	M2,5x15 - 08IP	17,67	00200
18,00 - 21,99	T10 - IP	8,19	062	T10 - IP	6,78	053	2,0 - 7,0 Nm	170,10	193	M3,0x17 - 10IP	19,00	00300
22,00 - 23,99	T10 - IP	8,19	062	T10 - IP	6,78	053	2,0 - 7,0 Nm	170,10	193	M3,5x21 - 10IP	19,00	00400
24,00 - 25,99	T15 - IP	8,70	063	T15 - IP	6,78	054	2,0 - 7,0 Nm	170,10	193	M4,0x23 - 15IP	20,74	00500
26,00 - 30,00	T20 - IP	9,65	064	T20 - IP	6,78	055	2,0 - 7,0 Nm	170,10	193	M4,5x25 - 20IP	23,02	00600

MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads

→ Chapter 2, Solid carbide drilling

Page No. 2|107

Solid Carbide NC Spot Drills

Ø 8, 10, 12, 16, 20 mm
NOF 2

SIG 90°

SIG 120°

SIG 142°

→ Chapter 4, Reaming and countersinking

Page No. 4|18 + 4|19

Replaceable reaming heads

Ø 8,00 – 30,20 mm

Through hole

Ø 12,20 – 30,20 mm

Blind hole

→ Chapter 14, Solid carbide milling cutters

Page No. 14|198 – 14|202

Solid carbide shoulder mills
Ø 8, 10, 12, 16, 20 mm /
ZEFP 3+4

Type PCR-UNI

Type PCR-ALU

Type N

Solid carbide torus bull nose milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4


Type W

Type N

Solid carbide rough and finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6

Type NF

Solid carbide finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide ball-nosed end mills
Ø 10, 12, 16, 20 mm / ZEFP 4

Type N

Solid carbide high-feed cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide quarter round cutter
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide deburring cutters
Ø 10, 12, 16, 20 mm / ZEFP 4+6

Type N

Type N

NOF / ZEFP = Number of cutting edges

Tool holder

→ Catalogue – Clamping technology, Chapter 16 Accessories

Page No. 16|259 – 16|261

OAL 60 – 90 mm

Tapered 87° / Steel

Cylindrical* / Steel

OAL 85 – 120 mm

Tapered 87° / Steel

Cylindrical* / Steel

Tapered 87° /
Solid carbide


Cylindrical* /
Solid carbide

OAL 110 – 150 mm

Tapered 87° / Solid carbide

Cylindrical* / Solid carbide

OAL 150 – 200 mm

Tapered 87° / Solid carbide

Cylindrical* / Steel

Cylindrical* / Solid carbide

OAL 200 – 250 mm

Cylindrical* / Steel

Cylindrical* / Solid carbide

* only conditionally suitable for milling

MultiChange – NC Spot Drill

▲ SZID = Coupling Size
▲ NOF = No. of cutting edges

NC-A Ti1050 | NC-A Ti1050 | NC-A Ti1050



										SIG 90° Solid carbide		SIG 120° Solid carbide		SIG 142° Solid carbide	
										10 709 ...		**10 712 ...**		**10 714 ...**	
DC mm	SZID	LU mm	DF mm	LCF mm	OAL mm	NOF	DRVS mm	torque moment Nm	$a_{p\,max}$ mm	EUR T7		EUR T7		EUR T7	
8	06	6,0	7,8	11	20,4	2	6	5	4	54,43	**080**	54,43	**080**	54,43	**080**
10	08	7,5	9,8	13	26,9	2	8	12,5	5	60,09	**100**	60,09	**100**	60,09	**100**
12	10	9,0	11,8	16	30,1	2	10	15	6	77,02	**120**	77,02	**120**	77,02	**120**
16	12	12,0	15,8	20	37,3	2	13	20	8	109,30	**160**	109,30	**160**	109,30	**160**
20	16	15,0	19,8	25	47,2	2	16	25	10	159,30	**200**	159,30	**200**	159,30	**200**
P										●		●		●	
M										●		●		●	
K										●		●		●	
N										●		●		●	
S															
H															
O															

→ v_c Page 148

Torque wrench should be used for coupling sizes 06 and 08
For unstable applications, the cutting data should be reduced.

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – WTX – Ti

Index	10 786 ..., 10 787 ...											
	3xD / 5xD											
	with through coolant	> Ø 2,5–3	> Ø 3–4	> Ø 4–5	> Ø 5–6	> Ø 6–8	> Ø 8–10	> Ø 10–12	> Ø 12–14	> Ø 14–16	> Ø 16–18	> Ø 18–20
	v_c (m/min)	f (mm/rev)										
P.1.1												
P.1.2	130	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.1.3	130	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.1.4	115	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.1.5	115	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.2.1												
P.2.2												
P.2.3	115	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.2.4	90	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.3.1												
P.3.2												
P.3.3	55	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
P.4.1	75	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.2	65	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.1.1	**70**	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.2.1	**70**	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.3.1	**70**	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
K.1.1												
K.1.2												
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1	**45**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.1.2	**45**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.2.1	**40**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.2.2	**40**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.2.3	**40**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.3.1	**55**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.3.2	**45**	0,02	0,04	0,05	0,07	0,09	0,11	0,13	0,16	0,18	0,20	0,22
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – UNI

Index	11 776 ..., 11 777 ..., 11 778 ..., 11 779 ..., 11 780 ..., 11 781 ...							
	3xD							
	without through coolant	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20	Ø 20–25
	v_c (m/min)		f (mm/rev)					
P.1.1	110	120	0,13	0,18	0,25	0,30	0,34	0,37
P.1.2	105	115	0,12	0,18	0,24	0,29	0,33	0,36
P.1.3	100	110	0,12	0,17	0,23	0,28	0,31	0,34
P.1.4	95	105	0,11	0,16	0,21	0,26	0,30	0,32
P.1.5	90	100	0,11	0,15	0,20	0,25	0,28	0,30
P.2.1	105	120	0,15	0,22	0,29	0,36	0,41	0,44
P.2.2	95	110	0,14	0,20	0,27	0,33	0,37	0,40
P.2.3	85	100	0,13	0,18	0,24	0,29	0,33	0,36
P.2.4	65	75	0,12	0,16	0,21	0,26	0,29	0,32
P.3.1	70	85	0,12	0,18	0,24	0,29	0,33	0,36
P.3.2	60	65	0,11	0,15	0,20	0,24	0,27	0,29
P.3.3	50	65	0,09	0,12	0,15	0,19	0,21	0,23
P.4.1	50	65	0,08	0,12	0,16	0,19	0,22	0,24
P.4.2	50	65	0,08	0,12	0,16	0,19	0,22	0,24
M.1.1								
M.2.1								
M.3.1								
K.1.1	85	120	0,17	0,26	0,36	0,45	0,52	0,56
K.1.2	75	100	0,15	0,22	0,29	0,36	0,41	0,45
K.2.1	100	160	0,17	0,25	0,34	0,42	0,48	0,52
K.2.2	75	100	0,15	0,22	0,29	0,36	0,41	0,45
K.3.1	80	90	0,16	0,23	0,32	0,39	0,44	0,48
K.3.2	70	80	0,14	0,19	0,25	0,31	0,35	0,38
N.1.1								
N.1.2								
N.2.1								
N.2.2								
N.2.3								
N.3.1								
N.3.2								
N.3.3								
N.4.1								
S.1.1								
S.1.2								
S.2.1								
S.2.2								
S.2.3								
S.3.1								
S.3.2								
S.3.3								
H.1.1	25	25	0,06	0,08	0,11	0,14	0,15	0,17
H.1.2								
H.1.3								
H.1.4								
H.2.1	35	35	0,08	0,11	0,14	0,18	0,20	0,22
H.3.1								
O.1.1								
O.1.2								
O.2.1								
O.2.2								
O.3.1								

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	11 782 ..., 11 783 ..., 11 784 ..., 11 785 ..., 11 786 ..., 11 787 ...								11 788 ..., 11 789 ..., 11 790 ...					
	5xD								8xD					
	without through coolant	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20	Ø 20–25	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)		f (mm/rev)						v_c (m/min)	f (mm/rev)				
P.1.1	110	120	0,13	0,18	0,25	0,30	0,34	0,37	110	0,13	0,18	0,25	0,30	0,34
P.1.2	105	115	0,12	0,18	0,24	0,29	0,33	0,36	105	0,12	0,18	0,24	0,29	0,33
P.1.3	100	110	0,12	0,17	0,23	0,28	0,31	0,34	100	0,12	0,17	0,23	0,28	0,31
P.1.4	95	105	0,11	0,16	0,21	0,26	0,30	0,32	95	0,11	0,16	0,21	0,26	0,30
P.1.5	90	100	0,11	0,15	0,20	0,25	0,28	0,30	90	0,11	0,15	0,20	0,25	0,28
P.2.1	105	120	0,15	0,22	0,29	0,36	0,41	0,44	105	0,15	0,22	0,29	0,36	0,41
P.2.2	95	110	0,14	0,20	0,27	0,33	0,37	0,40	95	0,14	0,20	0,27	0,33	0,37
P.2.3	85	100	0,13	0,18	0,24	0,29	0,33	0,36	85	0,13	0,18	0,24	0,29	0,33
P.2.4	65	75	0,12	0,16	0,21	0,26	0,29	0,32	65	0,12	0,16	0,21	0,26	0,29
P.3.1	70	85	0,12	0,18	0,24	0,29	0,33	0,36	70	0,12	0,18	0,24	0,29	0,33
P.3.2	60	65	0,11	0,15	0,20	0,24	0,27	0,29	60	0,11	0,15	0,20	0,24	0,27
P.3.3	50	65	0,09	0,12	0,15	0,19	0,21	0,23	50	0,09	0,12	0,15	0,19	0,21
P.4.1	50	65	0,08	0,12	0,16	0,19	0,22	0,24	50	0,08	0,12	0,16	0,19	0,22
P.4.2	50	65	0,08	0,12	0,16	0,19	0,22	0,24	50	0,08	0,12	0,16	0,19	0,22
M.1.1														
M.2.1														
M.3.1														
K.1.1	85	120	0,17	0,26	0,36	0,45	0,52	0,56	85	0,17	0,26	0,36	0,45	0,52
K.1.2	75	100	0,15	0,22	0,29	0,36	0,41	0,45	75	0,15	0,22	0,29	0,36	0,41
K.2.1	100	160	0,17	0,25	0,34	0,42	0,48	0,52	100	0,17	0,25	0,34	0,42	0,48
K.2.2	75	100	0,15	0,22	0,29	0,36	0,41	0,45	75	0,15	0,22	0,29	0,36	0,41
K.3.1	80	90	0,16	0,23	0,32	0,39	0,44	0,48	80	0,16	0,23	0,32	0,39	0,44
K.3.2	70	80	0,14	0,19	0,25	0,31	0,35	0,38	70	0,14	0,19	0,25	0,31	0,35
N.1.1														
N.1.2														
N.2.1														
N.2.2														
N.2.3														
N.3.1														
N.3.2														
N.3.3														
N.4.1														
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1	25	25	0,06	0,08	0,11	0,14	0,15	0,17	25	0,06	0,08	0,11	0,14	0,15
H.1.2														
H.1.3														
H.1.4														
H.2.1	35	35	0,08	0,11	0,14	0,18	0,20	0,22	35	0,08	0,11	0,14	0,18	0,20
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

Cutting data standard values – WTX – VA

Index	10 731 ..., 10 734 ...							10 740 ..., 10 745 ...						
	3xD							5xD						
	without through coolant	with through coolant	Ø 2–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20	without through coolant	with through coolant	Ø 2–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)		f (mm/rev)					v_c (m/min)		f (mm/rev)				
P.1.1	100	110	0,09	0,13	0,18	0,22	0,25	100	110	0,09	0,13	0,18	0,22	0,25
P.1.2	95	105	0,09	0,13	0,17	0,21	0,24	95	105	0,09	0,13	0,17	0,21	0,24
P.1.3	90	100	0,09	0,12	0,16	0,20	0,23	90	100	0,09	0,12	0,16	0,20	0,23
P.1.4	85	95	0,08	0,12	0,16	0,19	0,22	85	95	0,08	0,12	0,16	0,19	0,22
P.1.5	80	90	0,08	0,11	0,15	0,18	0,20	80	90	0,08	0,11	0,15	0,18	0,20
P.2.1	95	110	0,11	0,16	0,21	0,26	0,29	95	110	0,11	0,16	0,21	0,26	0,29
P.2.2	85	100	0,10	0,14	0,19	0,24	0,27	85	100	0,10	0,14	0,19	0,24	0,27
P.2.3	75	90	0,09	0,13	0,17	0,21	0,24	75	90	0,09	0,13	0,17	0,21	0,24
P.2.4	60	70	0,09	0,12	0,16	0,19	0,21	60	70	0,09	0,12	0,16	0,19	0,21
P.3.1	65	75	0,09	0,13	0,17	0,21	0,24	65	75	0,09	0,13	0,17	0,21	0,24
P.3.2	55	60	0,08	0,11	0,14	0,17	0,20	55	60	0,08	0,11	0,14	0,17	0,20
P.3.3	45	60	0,06	0,09	0,11	0,14	0,15	45	60	0,06	0,09	0,11	0,14	0,15
P.4.1	45	60	0,06	0,09	0,11	0,14	0,16	45	60	0,06	0,09	0,11	0,14	0,16
P.4.2	45	60	0,06	0,09	0,11	0,14	0,16	45	60	0,06	0,09	0,11	0,14	0,16
M.1.1	**35**	**55**	0,08	0,11	0,14	0,18	0,20	**35**	**55**	0,08	0,11	0,14	0,18	0,20
M.2.1	**30**	**50**	0,06	0,09	0,12	0,15	0,17	**30**	**50**	0,06	0,09	0,12	0,15	0,17
M.3.1	**30**	**50**	0,06	0,09	0,12	0,15	0,17	**30**	**50**	0,06	0,09	0,12	0,15	0,17
K.1.1	85	120	0,15	0,24	0,33	0,41	0,47	85	120	0,15	0,24	0,33	0,41	0,47
K.1.2	75	100	0,14	0,20	0,27	0,33	0,37	75	100	0,14	0,20	0,27	0,33	0,37
K.2.1	100	160	0,15	0,22	0,31	0,38	0,43	100	160	0,15	0,22	0,31	0,38	0,43
K.2.2	75	100	0,14	0,20	0,27	0,33	0,37	75	100	0,14	0,20	0,27	0,33	0,37
K.3.1	80	90	0,15	0,21	0,29	0,35	0,40	80	90	0,15	0,21	0,29	0,35	0,40
K.3.2	70	80	0,12	0,17	0,23	0,28	0,32	70	80	0,12	0,17	0,23	0,28	0,32
N.1.1	220	330	0,10	0,16	0,22	0,30	0,33	220	330	0,10	0,16	0,22	0,30	0,33
N.1.2	200	300	0,09	0,12	0,20	0,25	0,30	200	300	0,09	0,12	0,20	0,25	0,30
N.2.1	180	250	0,11	0,15	0,26	0,33	0,39	180	250	0,11	0,15	0,26	0,33	0,39
N.2.2	150	220	0,11	0,15	0,26	0,33	0,39	150	220	0,11	0,15	0,26	0,33	0,39
N.2.3	120	180	0,11	0,15	0,26	0,33	0,39	120	180	0,11	0,15	0,26	0,33	0,39
N.3.1	160	200	0,15	0,24	0,33	0,41	0,47	160	200	0,15	0,24	0,33	0,41	0,47
N.3.2	90	120	0,14	0,20	0,27	0,33	0,37	90	120	0,14	0,20	0,27	0,33	0,37
N.3.3	100	140	0,12	0,15	0,21	0,25	0,28	100	140	0,12	0,15	0,21	0,25	0,28
N.4.1														
S.1.1	**20**	**30**	0,06	0,09	0,11	0,14	0,16	**20**	**30**	0,06	0,09	0,11	0,14	0,16
S.1.2	**15**	**20**	0,04	0,06	0,08	0,10	0,11	**15**	**20**	0,04	0,06	0,08	0,10	0,11
S.2.1	**15**	**20**	0,04	0,06	0,08	0,10	0,11	**15**	**20**	0,04	0,06	0,08	0,10	0,11
S.2.2	**10**	**15**	0,05	0,08	0,10	0,13	0,14	**10**	**15**	0,05	0,08	0,10	0,13	0,14
S.2.3	**10**	**15**	0,04	0,06	0,08	0,10	0,11	**10**	**15**	0,04	0,06	0,08	0,10	0,11
S.3.1														
S.3.2	**20**	**30**	0,06	0,09	0,12	0,15	0,17	**20**	**30**	0,06	0,09	0,12	0,15	0,17
S.3.3	**15**	**25**	0,05	0,08	0,10	0,13	0,14	**15**	**25**	0,05	0,08	0,10	0,13	0,14
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	10 770 ...					
	8xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)				
P.1.1	110	0,09	0,13	0,18	0,22	0,25
P.1.2	105	0,09	0,13	0,17	0,21	0,24
P.1.3	100	0,09	0,12	0,16	0,20	0,23
P.1.4	95	0,08	0,12	0,16	0,19	0,22
P.1.5	90	0,08	0,11	0,15	0,18	0,20
P.2.1	110	0,11	0,16	0,21	0,26	0,29
P.2.2	100	0,10	0,14	0,19	0,24	0,27
P.2.3	90	0,09	0,13	0,17	0,21	0,24
P.2.4	70	0,09	0,12	0,16	0,19	0,21
P.3.1	75	0,09	0,13	0,17	0,21	0,24
P.3.2	60	0,08	0,11	0,14	0,17	0,20
P.3.3	60	0,06	0,09	0,11	0,14	0,15
P.4.1	60	0,06	0,09	0,11	0,14	0,16
P.4.2	60	0,06	0,09	0,11	0,14	0,16
M.1.1	**55**	0,08	0,11	0,14	0,18	0,20
M.2.1	**50**	0,06	0,09	0,12	0,15	0,17
M.3.1	**50**	0,06	0,09	0,12	0,15	0,17
K.1.1	120	0,15	0,24	0,33	0,41	0,47
K.1.2	100	0,14	0,20	0,27	0,33	0,37
K.2.1	160	0,15	0,22	0,31	0,38	0,43
K.2.2	100	0,14	0,20	0,27	0,33	0,37
K.3.1	90	0,15	0,21	0,29	0,35	0,40
K.3.2	80	0,12	0,17	0,23	0,28	0,32
N.1.1	330	0,10	0,16	0,22	0,30	0,33
N.1.2	300	0,09	0,12	0,20	0,25	0,30
N.2.1	250	0,11	0,15	0,26	0,33	0,39
N.2.2	220	0,11	0,15	0,26	0,33	0,39
N.2.3	180	0,11	0,15	0,26	0,33	0,39
N.3.1	200	0,15	0,24	0,33	0,41	0,47
N.3.2	120	0,14	0,20	0,27	0,33	0,37
N.3.3	140	0,12	0,15	0,21	0,25	0,28
N.4.1						
S.1.1	**30**	0,06	0,09	0,11	0,14	0,16
S.1.2	**20**	0,04	0,06	0,08	0,10	0,11
S.2.1	**20**	0,04	0,06	0,08	0,10	0,11
S.2.2	**15**	0,05	0,08	0,10	0,13	0,14
S.2.3	**15**	0,04	0,06	0,08	0,10	0,11
S.3.1						
S.3.2	**30**	0,06	0,09	0,12	0,15	0,17
S.3.3	**25**	0,05	0,08	0,10	0,13	0,14
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – WTX – Speed UNI

Index	10 781 ...						10 771 ...					
	3xD						5xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)				
P.1.1	185	0,17	0,24	0,33	0,40	0,45	185	0,17	0,24	0,33	0,40	0,45
P.1.2	180	0,16	0,23	0,31	0,38	0,43	180	0,16	0,23	0,31	0,38	0,43
P.1.3	170	0,16	0,22	0,30	0,36	0,41	170	0,16	0,22	0,30	0,36	0,41
P.1.4	160	0,15	0,21	0,28	0,35	0,39	160	0,15	0,21	0,28	0,35	0,39
P.1.5	155	0,14	0,20	0,27	0,33	0,37	155	0,14	0,20	0,27	0,33	0,37
P.2.1	185	0,20	0,29	0,39	0,47	0,53	185	0,20	0,29	0,39	0,47	0,53
P.2.2	170	0,18	0,26	0,35	0,43	0,49	170	0,18	0,26	0,35	0,43	0,49
P.2.3	155	0,17	0,24	0,32	0,39	0,44	155	0,17	0,24	0,32	0,39	0,44
P.2.4	120	0,16	0,21	0,28	0,34	0,38	120	0,16	0,21	0,28	0,34	0,38
P.3.1	130	0,16	0,23	0,32	0,39	0,44	130	0,16	0,23	0,32	0,39	0,44
P.3.2	100	0,14	0,20	0,26	0,32	0,36	100	0,14	0,20	0,26	0,32	0,36
P.3.3	100	0,12	0,16	0,20	0,25	0,28	100	0,12	0,16	0,20	0,25	0,28
P.4.1	100	0,11	0,16	0,21	0,25	0,29	100	0,11	0,16	0,21	0,25	0,29
P.4.2	100	0,11	0,16	0,21	0,25	0,29	100	0,11	0,16	0,21	0,25	0,29
M.1.1	65	0,08	0,12	0,16	0,19	0,22	65	0,08	0,12	0,16	0,19	0,22
M.2.1	60	0,07	0,10	0,14	0,17	0,19	60	0,07	0,10	0,14	0,17	0,19
M.3.1	60	0,07	0,10	0,14	0,17	0,19	60	0,07	0,10	0,14	0,17	0,19
K.1.1	150	0,18	0,28	0,40	0,49	0,56	150	0,18	0,28	0,40	0,49	0,56
K.1.2	125	0,16	0,24	0,32	0,39	0,45	125	0,16	0,24	0,32	0,39	0,45
K.2.1	200	0,18	0,27	0,37	0,46	0,52	200	0,18	0,27	0,37	0,46	0,52
K.2.2	125	0,16	0,24	0,32	0,39	0,45	125	0,16	0,24	0,32	0,39	0,45
K.3.1	115	0,18	0,25	0,34	0,42	0,48	115	0,18	0,25	0,34	0,42	0,48
K.3.2	100	0,15	0,21	0,28	0,34	0,38	100	0,15	0,21	0,28	0,34	0,38
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	10 782 ...					
	8xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)				
P.1.1	185	0,17	0,24	0,33	0,40	0,45
P.1.2	180	0,16	0,23	0,31	0,38	0,43
P.1.3	170	0,16	0,22	0,30	0,36	0,41
P.1.4	160	0,15	0,21	0,28	0,35	0,39
P.1.5	155	0,14	0,20	0,27	0,33	0,37
P.2.1	185	0,20	0,29	0,39	0,47	0,53
P.2.2	170	0,18	0,26	0,35	0,43	0,49
P.2.3	155	0,17	0,24	0,32	0,39	0,44
P.2.4	120	0,16	0,21	0,28	0,34	0,38
P.3.1	130	0,16	0,23	0,32	0,39	0,44
P.3.2	100	0,14	0,20	0,26	0,32	0,36
P.3.3	100	0,12	0,16	0,20	0,25	0,28
P.4.1	100	0,11	0,16	0,21	0,25	0,29
P.4.2	100	0,11	0,16	0,21	0,25	0,29
M.1.1	65	0,08	0,12	0,16	0,19	0,22
M.2.1	60	0,07	0,10	0,14	0,17	0,19
M.3.1	60	0,07	0,10	0,14	0,17	0,19
K.1.1	150	0,18	0,28	0,40	0,49	0,56
K.1.2	125	0,16	0,24	0,32	0,39	0,45
K.2.1	200	0,18	0,27	0,37	0,46	0,52
K.2.2	125	0,16	0,24	0,32	0,39	0,45
K.3.1	115	0,18	0,25	0,34	0,42	0,48
K.3.2	100	0,15	0,21	0,28	0,34	0,38
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – WTX – Feed UNI

Index	10 789 ...								
	5xD								
	with through coolant	Ø 4–6	Ø 6–7	Ø 7–8	Ø 8–10	Ø 10–12	Ø 12–15	Ø 15–17	Ø 17–20
	v_c (m/min)	f (mm/rev)							
P.1.1	125	0,28	0,34	0,37	0,42	0,48	0,54	0,59	0,63
P.1.2	120	0,27	0,32	0,35	0,40	0,46	0,52	0,56	0,60
P.1.3	115	0,25	0,31	0,34	0,38	0,44	0,49	0,54	0,57
P.1.4	110	0,24	0,29	0,32	0,36	0,41	0,47	0,51	0,54
P.1.5	105	0,23	0,27	0,30	0,34	0,39	0,44	0,48	0,52
P.2.1	125	0,33	0,40	0,44	0,50	0,57	0,64	0,70	0,75
P.2.2	115	0,30	0,36	0,40	0,45	0,51	0,58	0,63	0,68
P.2.3	105	0,27	0,32	0,36	0,41	0,46	0,52	0,57	0,61
P.2.4	80	0,25	0,29	0,32	0,36	0,41	0,46	0,50	0,54
P.3.1	85	0,27	0,32	0,36	0,41	0,46	0,52	0,57	0,61
P.3.2	70	0,23	0,27	0,30	0,33	0,38	0,43	0,47	0,50
P.3.3	70	0,18	0,22	0,24	0,26	0,30	0,33	0,36	0,38
P.4.1	70	0,18	0,21	0,24	0,27	0,30	0,34	0,38	0,40
P.4.2	70	0,18	0,21	0,24	0,27	0,30	0,34	0,38	0,40
M.1.1	55	0,13	0,16	0,18	0,20	0,23	0,26	0,28	0,30
M.2.1	50	0,11	0,14	0,15	0,17	0,20	0,22	0,24	0,26
M.3.1	50	0,11	0,14	0,15	0,17	0,20	0,22	0,24	0,26
K.1.1	140	0,38	0,47	0,53	0,61	0,70	0,80	0,89	0,95
K.1.2	115	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
K.2.1	185	0,37	0,45	0,50	0,57	0,66	0,75	0,82	0,88
K.2.2	115	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
K.3.1	105	0,35	0,42	0,47	0,53	0,61	0,69	0,76	0,81
K.3.2	90	0,29	0,35	0,38	0,43	0,49	0,55	0,60	0,64
N.1.1	380	0,28	0,34	0,37	0,42	0,48	0,54	0,59	0,63
N.1.2	345	0,25	0,31	0,34	0,38	0,44	0,49	0,54	0,57
N.2.1	290	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
N.2.2	255	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
N.2.3	205	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
N.3.1	230	0,38	0,47	0,53	0,61	0,70	0,80	0,89	0,95
N.3.2	140	0,24	0,29	0,33	0,37	0,43	0,48	0,53	0,57
N.3.3									
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	with through coolant v_c (m/min)	10 794 ..., 10 796 ... 8xD / 12xD Ø 4–6 f (mm/rev)	Ø 6–7	Ø 7–8	Ø 8–10	Ø 10–12	Ø 12–15	Ø 15–17	Ø 17–20
P.1.1	125	0,28	0,34	0,37	0,42	0,48	0,54	0,59	0,63
P.1.2	120	0,27	0,32	0,35	0,40	0,46	0,52	0,56	0,60
P.1.3	115	0,25	0,31	0,34	0,38	0,44	0,49	0,54	0,57
P.1.4	110	0,24	0,29	0,32	0,36	0,41	0,47	0,51	0,54
P.1.5	105	0,23	0,27	0,30	0,34	0,39	0,44	0,48	0,52
P.2.1	125	0,33	0,40	0,44	0,50	0,57	0,64	0,70	0,75
P.2.2	115	0,30	0,36	0,40	0,45	0,51	0,58	0,63	0,68
P.2.3	105	0,27	0,32	0,36	0,41	0,46	0,52	0,57	0,61
P.2.4	80	0,25	0,29	0,32	0,36	0,41	0,46	0,50	0,54
P.3.1	85	0,27	0,32	0,36	0,41	0,46	0,52	0,57	0,61
P.3.2	70	0,23	0,27	0,30	0,33	0,38	0,43	0,47	0,50
P.3.3	70	0,18	0,22	0,24	0,26	0,30	0,33	0,36	0,38
P.4.1	70	0,18	0,21	0,24	0,27	0,30	0,34	0,38	0,40
P.4.2	70	0,18	0,21	0,24	0,27	0,30	0,34	0,38	0,40
M.1.1	55	0,13	0,16	0,18	0,20	0,23	0,26	0,28	0,30
M.2.1	50	0,11	0,14	0,15	0,17	0,20	0,22	0,24	0,26
M.3.1	50	0,11	0,14	0,15	0,17	0,20	0,22	0,24	0,26
K.1.1	140	0,38	0,47	0,53	0,61	0,70	0,80	0,89	0,95
K.1.2	115	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
K.2.1	185	0,37	0,45	0,50	0,57	0,66	0,75	0,82	0,88
K.2.2	115	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
K.3.1	105	0,35	0,42	0,47	0,53	0,61	0,69	0,76	0,81
K.3.2	90	0,29	0,35	0,38	0,43	0,49	0,55	0,60	0,64
N.1.1	380	0,28	0,34	0,37	0,42	0,48	0,54	0,59	0,63
N.1.2	345	0,25	0,31	0,34	0,38	0,44	0,49	0,54	0,57
N.2.1	290	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
N.2.2	255	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
N.2.3	205	0,32	0,39	0,44	0,50	0,57	0,64	0,70	0,75
N.3.1	230	0,38	0,47	0,53	0,61	0,70	0,80	0,89	0,95
N.3.2	140	0,24	0,29	0,33	0,37	0,43	0,48	0,53	0,57
N.3.3									
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – WTX – Speed VA

Index	10 773 ...						10 774 ...					
	5xD						12xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)				
P.1.1	165	0,12	0,17	0,23	0,28	0,31	110	0,09	0,13	0,18	0,22	0,25
P.1.2	160	0,11	0,16	0,22	0,26	0,30	105	0,09	0,13	0,17	0,21	0,24
P.1.3	150	0,11	0,15	0,20	0,25	0,28	100	0,09	0,12	0,16	0,20	0,23
P.1.4	145	0,10	0,15	0,19	0,24	0,27	95	0,08	0,12	0,16	0,19	0,22
P.1.5	135	0,10	0,14	0,18	0,23	0,26	90	0,08	0,11	0,15	0,18	0,20
P.2.1	165	0,14	0,20	0,27	0,33	0,37	110	0,11	0,16	0,21	0,26	0,29
P.2.2	150	0,13	0,18	0,24	0,30	0,34	100	0,10	0,14	0,19	0,24	0,27
P.2.3	135	0,11	0,16	0,22	0,27	0,30	90	0,09	0,13	0,17	0,21	0,24
P.2.4	105	0,11	0,15	0,19	0,24	0,27	70	0,09	0,12	0,16	0,19	0,21
P.3.1	115	0,11	0,16	0,22	0,27	0,30	75	0,09	0,13	0,17	0,21	0,24
P.3.2	90	0,10	0,13	0,18	0,22	0,25	60	0,08	0,11	0,14	0,17	0,20
P.3.3	90	0,08	0,11	0,14	0,17	0,19	60	0,06	0,09	0,11	0,14	0,15
P.4.1	70	0,08	0,11	0,14	0,18	0,20	60	0,06	0,09	0,11	0,14	0,16
P.4.2	70	0,08	0,11	0,14	0,18	0,20	60	0,06	0,09	0,11	0,14	0,16
M.1.1	80	0,09	0,13	0,18	0,22	0,25	55	0,08	0,11	0,14	0,18	0,20
M.2.1	75	0,08	0,11	0,15	0,19	0,21	50	0,06	0,09	0,12	0,15	0,17
M.3.1	75	0,08	0,11	0,15	0,19	0,21	50	0,06	0,09	0,12	0,15	0,17
K.1.1	150	0,15	0,24	0,33	0,41	0,47	120	0,15	0,24	0,33	0,41	0,47
K.1.2	125	0,14	0,20	0,27	0,33	0,37	100	0,14	0,20	0,27	0,33	0,37
K.2.1	200	0,15	0,22	0,31	0,38	0,43	160	0,15	0,22	0,31	0,38	0,43
K.2.2	125	0,14	0,20	0,27	0,33	0,37	100	0,14	0,20	0,27	0,33	0,37
K.3.1	115	0,15	0,21	0,29	0,35	0,40	90	0,15	0,21	0,29	0,35	0,40
K.3.2	100	0,12	0,17	0,23	0,28	0,32	80	0,12	0,17	0,23	0,28	0,32
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1							200	0,15	0,24	0,33	0,41	0,47
N.3.2	145	0,14	0,20	0,27	0,33	0,37	120	0,14	0,20	0,27	0,33	0,37
N.3.3												
N.4.1												
S.1.1	35	0,07	0,10	0,14	0,17	0,19	30	0,06	0,09	0,11	0,14	0,16
S.1.2	25	0,05	0,07	0,10	0,12	0,14	20	0,04	0,06	0,08	0,10	0,11
S.2.1	25	0,05	0,07	0,10	0,12	0,14	20	0,04	0,06	0,08	0,10	0,11
S.2.2	20	0,06	0,09	0,12	0,15	0,17	15	0,05	0,08	0,10	0,13	0,14
S.2.3	20	0,05	0,07	0,10	0,12	0,14	15	0,04	0,06	0,08	0,10	0,11
S.3.1												
S.3.2	35	0,08	0,11	0,15	0,18	0,20	30	0,06	0,09	0,12	0,15	0,17
S.3.3	30	0,06	0,09	0,12	0,15	0,17	25	0,05	0,08	0,10	0,13	0,14
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – H

Index	10 777 ...								
		3xD							
	without through coolant	Ø 2–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14
	v_c (m/min)	f (mm/rev)							
P.1.1	80	0,05	0,07	0,08	0,10	0,14	0,18	0,21	0,24
P.1.2	70	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21
P.1.3	70	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21
P.1.4	70	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21
P.1.5	80	0,05	0,07	0,08	0,10	0,14	0,18	0,21	0,24
P.2.1	75	0,05	0,07	0,08	0,10	0,14	0,18	0,21	0,24
P.2.2	70	0,05	0,06	0,08	0,09	0,13	0,16	0,19	0,22
P.2.3	70	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21
P.2.4	70	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21
P.3.1									
P.3.2									
P.3.3									
P.4.1									
P.4.2									
M.1.1									
M.2.1									
M.3.1									
K.1.1	**85**	0,08	0,10	0,13	0,15	0,19	0,23	0,27	0,34
K.1.2	**80**	0,08	0,10	0,13	0,15	0,19	0,23	0,27	0,34
K.2.1	**85**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25
K.2.2	**80**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25
K.3.1	**85**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25
K.3.2	**80**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1									
N.3.2									
N.3.3									
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1	**30**	0,04	0,05	0,05	0,06	0,07	0,08	0,09	0,10
H.1.2	**15**	0,04	0,05	0,05	0,06	0,07	0,08	0,09	0,10
H.1.3	**10**	0,03	0,04	0,04	0,05	0,06	0,06	0,07	0,07
H.1.4	**10**	0,03	0,04	0,04	0,05	0,06	0,06	0,07	0,07
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – Quattro 4F

Index	10 735 ...						10 736 ...					
	5xD						8xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)				
P.1.1	110	0,12	0,17	0,23	0,28	0,31	110	0,12	0,17	0,23	0,28	0,31
P.1.2	105	0,11	0,16	0,22	0,26	0,30	105	0,11	0,16	0,22	0,26	0,30
P.1.3	100	0,11	0,15	0,20	0,25	0,28	100	0,11	0,15	0,20	0,25	0,28
P.1.4	95	0,10	0,15	0,19	0,24	0,27	95	0,10	0,15	0,19	0,24	0,27
P.1.5	90	0,10	0,14	0,18	0,23	0,26	90	0,10	0,14	0,18	0,23	0,26
P.2.1	110	0,14	0,20	0,27	0,33	0,37	110	0,14	0,20	0,27	0,33	0,37
P.2.2	100	0,13	0,18	0,24	0,30	0,34	100	0,13	0,18	0,24	0,30	0,34
P.2.3	90	0,11	0,16	0,22	0,27	0,30	90	0,11	0,16	0,22	0,27	0,30
P.2.4	70	0,11	0,15	0,19	0,24	0,27	70	0,11	0,15	0,19	0,24	0,27
P.3.1	75	0,11	0,16	0,22	0,27	0,30	75	0,11	0,16	0,22	0,27	0,30
P.3.2	60	0,10	0,13	0,18	0,22	0,25	60	0,10	0,13	0,18	0,22	0,25
P.3.3	60	0,08	0,11	0,14	0,17	0,19	60	0,08	0,11	0,14	0,17	0,19
P.4.1	60	0,08	0,11	0,14	0,18	0,20	60	0,08	0,11	0,14	0,18	0,20
P.4.2	60	0,08	0,11	0,14	0,18	0,20	60	0,08	0,11	0,14	0,18	0,20
M.1.1												
M.2.1												
M.3.1												
K.1.1	120	0,15	0,24	0,33	0,41	0,47	120	0,15	0,24	0,33	0,41	0,47
K.1.2	100	0,14	0,20	0,27	0,33	0,37	100	0,14	0,20	0,27	0,33	0,37
K.2.1	160	0,15	0,22	0,31	0,38	0,43	160	0,15	0,22	0,31	0,38	0,43
K.2.2	100	0,14	0,20	0,27	0,33	0,37	100	0,14	0,20	0,27	0,33	0,37
K.3.1	90	0,15	0,21	0,29	0,35	0,40	90	0,15	0,21	0,29	0,35	0,40
K.3.2	80	0,12	0,17	0,23	0,28	0,32	80	0,12	0,17	0,23	0,28	0,32
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1	25	0,05	0,07	0,09	0,12	0,13	25	0,05	0,07	0,09	0,12	0,13
H.1.2												
H.1.3												
H.1.4												
H.2.1	30	0,06	0,09	0,12	0,15	0,17	30	0,06	0,09	0,12	0,15	0,17
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	10 737 ...					
	12xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)				
P.1.1	110	0,12	0,17	0,23	0,28	0,31
P.1.2	105	0,11	0,16	0,22	0,26	0,30
P.1.3	100	0,11	0,15	0,20	0,25	0,28
P.1.4	95	0,10	0,15	0,19	0,24	0,27
P.1.5	90	0,10	0,14	0,18	0,23	0,26
P.2.1	110	0,14	0,20	0,27	0,33	0,37
P.2.2	100	0,13	0,18	0,24	0,30	0,34
P.2.3	90	0,11	0,16	0,22	0,27	0,30
P.2.4	70	0,11	0,15	0,19	0,24	0,27
P.3.1	75	0,11	0,16	0,22	0,27	0,30
P.3.2	60	0,10	0,13	0,18	0,22	0,25
P.3.3	60	0,08	0,11	0,14	0,17	0,19
P.4.1	60	0,08	0,11	0,14	0,18	0,20
P.4.2	60	0,08	0,11	0,14	0,18	0,20
M.1.1						
M.2.1						
M.3.1						
K.1.1	120	0,15	0,24	0,33	0,41	0,47
K.1.2	100	0,14	0,20	0,27	0,33	0,37
K.2.1	160	0,15	0,22	0,31	0,38	0,43
K.2.2	100	0,14	0,20	0,27	0,33	0,37
K.3.1	90	0,15	0,21	0,29	0,35	0,40
K.3.2	80	0,12	0,17	0,23	0,28	0,32
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1	25	0,05	0,07	0,09	0,12	0,13
H.1.2						
H.1.3						
H.1.4						
H.2.1	30	0,06	0,09	0,12	0,15	0,17
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – WTX – AL

Index	10 791 ...											
	5xD											
	with through coolant	Ø 2–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)										
P.1.1												
P.1.2												
P.1.3												
P.1.4												
P.1.5												
P.2.1												
P.2.2												
P.2.3												
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1	360	0,15	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.1.2	400	0,15	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.2.1	360	0,20	0,23	0,25	0,28	0,32	0,35	0,38	0,45	0,50	0,55	0,60
N.2.2	400	0,20	0,23	0,25	0,28	0,32	0,35	0,38	0,45	0,50	0,55	0,60
N.2.3	350	0,15	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.3.1	200	0,08	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.3.2	200	0,08	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.3.3	160	0,08	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	10 792 ...										
	8xD										
	with through coolant	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)									
P.1.1											
P.1.2											
P.1.3											
P.1.4											
P.1.5											
P.2.1											
P.2.2											
P.2.3											
P.2.4											
P.3.1											
P.3.2											
P.3.3											
P.4.1											
P.4.2											
M.1.1											
M.2.1											
M.3.1											
K.1.1											
K.1.2											
K.2.1											
K.2.2											
K.3.1											
K.3.2											
N.1.1	320	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.1.2	360	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.2.1	320	0,23	0,25	0,28	0,32	0,35	0,38	0,45	0,50	0,55	0,60
N.2.2	360	0,23	0,25	0,28	0,32	0,35	0,38	0,45	0,50	0,55	0,60
N.2.3	310	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.3.1	160	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.3.2	160	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.3.3	140	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

Cutting data standard values – WTX – AL

Index	10 793 ...										
	12xD										
	with through coolant	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)									
P.1.1											
P.1.2											
P.1.3											
P.1.4											
P.1.5											
P.2.1											
P.2.2											
P.2.3											
P.2.4											
P.3.1											
P.3.2											
P.3.3											
P.4.1											
P.4.2											
M.1.1											
M.2.1											
M.3.1											
K.1.1											
K.1.2											
K.2.1											
K.2.2											
K.3.1											
K.3.2											
N.1.1	**250**	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.1.2	**280**	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.2.1	**250**	0,23	0,25	0,28	0,32	0,35	0,38	0,45	0,50	0,55	0,60
N.2.2	**280**	0,23	0,25	0,28	0,32	0,35	0,38	0,45	0,50	0,55	0,60
N.2.3	**245**	0,20	0,23	0,25	0,29	0,32	0,35	0,40	0,45	0,50	0,55
N.3.1	**150**	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.3.2	**150**	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.3.3	**120**	0,11	0,13	0,15	0,19	0,23	0,26	0,30	0,34	0,38	0,42
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – HFDS – high-feed drill

Index	10 797 ...						10 798 ...					
	3xD						5xD					
	with through coolant	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	with through coolant	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)				
P.1.1	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.1.2	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.1.3	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.1.4	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.1.5	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.2.1	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.2.2	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**100**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.2.3	**90**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**90**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.2.4	**90**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9	**90**	0,3–0,4	0,5–0,6	0,7–0,8	0,8–0,9	0,8–0,9
P.3.1	**85**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7	**85**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7
P.3.2	**70**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7	**70**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7
P.3.3	**70**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7	**70**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7
P.4.1	**65**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7	**65**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7
P.4.2	**65**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7	**65**	0,2–0,3	0,3–0,4	0,5–0,6	0,6–0,7	0,6–0,7
M.1.1	65	0,2–0,25	0,3–0,4	0,5–0,6	0,6–0,6	0,6–0,6	65	0,2–0,25	0,3–0,4	0,5–0,6	0,6–0,6	0,6–0,6
M.2.1	65	0,2–0,25	0,3–0,4	0,5–0,6	0,6–0,6	0,6–0,6	65	0,2–0,25	0,3–0,4	0,5–0,6	0,6–0,6	0,6–0,6
M.3.1	55	0,2–0,25	0,3–0,4	0,5–0,6	0,6–0,6	0,6–0,6	55	0,2–0,25	0,3–0,4	0,5–0,6	0,6–0,6	0,6–0,6
K.1.1	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
K.1.2	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
K.2.1	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
K.2.2	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
K.3.1	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
K.3.2	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	**130**	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
N.3.2	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
N.3.3	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
N.4.1	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9	130	0,4–0,6	0,5–0,7	0,6–0,8	0,7–0,9	0,7–0,9
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1	110	0,6	0,6	0,8	0,9	1,0	110	0,6	0,6	0,8	0,9	1,0

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – 180

Index	10 720 ...					
	3xD					
	with through coolant	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
	v_c (m/min)	f (mm/rev)				
P.1.1	90	0,09	0,13	0,18	0,22	0,25
P.1.2	85	0,09	0,13	0,17	0,21	0,24
P.1.3	80	0,09	0,12	0,16	0,20	0,23
P.1.4	75	0,08	0,12	0,16	0,19	0,22
P.1.5	70	0,08	0,11	0,15	0,18	0,20
P.2.1	90	0,11	0,16	0,21	0,26	0,29
P.2.2	80	0,10	0,14	0,19	0,24	0,27
P.2.3	70	0,09	0,13	0,17	0,21	0,24
P.2.4	55	0,09	0,12	0,16	0,19	0,21
P.3.1	60	0,09	0,13	0,17	0,21	0,24
P.3.2	50	0,08	0,11	0,14	0,17	0,20
P.3.3	50	0,06	0,09	0,11	0,14	0,15
P.4.1	50	0,06	0,09	0,11	0,14	0,16
P.4.2	50	0,06	0,09	0,11	0,14	0,16
M.1.1	45	0,06	0,09	0,11	0,14	0,16
M.2.1	40	0,05	0,07	0,10	0,12	0,14
M.3.1	40	0,05	0,07	0,10	0,12	0,14
K.1.1	95	0,12	0,19	0,26	0,33	0,38
K.1.2	80	0,11	0,16	0,21	0,26	0,30
K.2.1	130	0,12	0,18	0,25	0,30	0,35
K.2.2	80	0,11	0,16	0,21	0,26	0,30
K.3.1	70	0,12	0,17	0,23	0,28	0,32
K.3.2	65	0,10	0,14	0,18	0,22	0,25
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Index	10 721 ... 5xD with through coolant v_c (m/min)	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
		f (mm/rev)				
P.1.1	90	0,09	0,13	0,18	0,22	0,25
P.1.2	85	0,09	0,13	0,17	0,21	0,24
P.1.3	80	0,09	0,12	0,16	0,20	0,23
P.1.4	75	0,08	0,12	0,16	0,19	0,22
P.1.5	70	0,08	0,11	0,15	0,18	0,20
P.2.1	90	0,11	0,16	0,21	0,26	0,29
P.2.2	80	0,10	0,14	0,19	0,24	0,27
P.2.3	70	0,09	0,13	0,17	0,21	0,24
P.2.4	55	0,09	0,12	0,16	0,19	0,21
P.3.1	60	0,09	0,13	0,17	0,21	0,24
P.3.2	50	0,08	0,11	0,14	0,17	0,20
P.3.3	50	0,06	0,09	0,11	0,14	0,15
P.4.1	50	0,06	0,09	0,11	0,14	0,16
P.4.2	50	0,06	0,09	0,11	0,14	0,16
M.1.1	45	0,06	0,09	0,11	0,14	0,16
M.2.1	40	0,05	0,07	0,10	0,12	0,14
M.3.1	40	0,05	0,07	0,10	0,12	0,14
K.1.1	95	0,12	0,19	0,26	0,33	0,38
K.1.2	80	0,11	0,16	0,21	0,26	0,30
K.2.1	130	0,12	0,18	0,25	0,30	0,35
K.2.2	80	0,11	0,16	0,21	0,26	0,30
K.3.1	70	0,12	0,17	0,23	0,28	0,32
K.3.2	65	0,10	0,14	0,18	0,22	0,25
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Application Note:

Spot drilling with reduced feedrate

1. Feedrate f [mm/U] should be multiplied by correction factor A_k
2. Drill with reduced feed rate until tool is fully engaged in workpiece by approximately 0.25 x D
3. Retract from the hole at double the feed rate f in mm/U – only with inclined surfaces

   This operation is necessary in order to achieve maximum performance of the drill!
4. Drill the hole with feed rate f [mm/U] without pecking for chip evacuation

Correction factor A_k for f [mm/U] when spot drilling		
Inclination workpiece surface	A_k to 3xD (10 720 ...)	A_k to 5xD (10 721 ...)
15°	0,5	0,25
30°	0,4	not recommended
45°	0,25	not recommended

For drilling on flat surfaces (inclination 0 °) with the WTX – 180 5xD, we recommend the use of a pilot drill. (WTX – UNI 3xD)

Cutting data standard values – type UNI

Index	11 706 ..., 11 707 ..., 11 709 ..., 11 710 ...																
		3xD / 5xD															
	without through coolant	≤ Ø 1	Ø 1–1,25	Ø 1,25–1,5	Ø 1,5–2	Ø 2–2,5	Ø 2,5–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)															
P.1.1	90	0,03	0,04	0,05	0,06	0,08	0,09	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.1.2	75	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.3	75	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.4	70	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.1.5	70	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.1	80	0,03	0,04	0,05	0,06	0,08	0,09	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.2.2	70	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.2.3	70	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.4	55	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.1	70	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.2	55	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.3																	
P.4.1																	
P.4.2																	
M.1.1																	
M.2.1																	
M.3.1																	
K.1.1	90	0,04	0,05	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.1.2	75	0,04	0,05	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.2.1	75	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.2.2	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.1	75	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.2	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1																	
S.3.2																	
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine.
The specified values represent guideline cutting data that must be corrected according to the usage conditions.

Index	11 700 ..., 11 701 ..., 11 702 ..., 11 703 ...																
		3xD / 5xD															
	with through coolant	≤ Ø 1	Ø 1–1,25	Ø 1,25–1,5	Ø 1,5–2	Ø 2–2,5	Ø 2,5–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)															
P.1.1	115	0,03	0,04	0,05	0,06	0,08	0,09	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.1.2	95	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.3	95	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.4	85	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.1.5	85	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.1	95	0,03	0,04	0,05	0,06	0,08	0,09	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.2.2	85	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.2.3	85	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.4	70	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.1	85	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.2	70	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.3	40	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.1	50	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.2	30	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.1.1	35	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.2.1	35	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.3.1	35	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
K.1.1	115	0,04	0,05	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.1.2	95	0,04	0,05	0,06	0,08	0,10	0,13	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.2.1	95	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.2.2	90	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.1	95	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.2	90	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
N.1.1	200	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
N.1.2	200	0,03	0,03	0,04	0,05	0,07	0,08	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
N.2.1	160	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
N.2.2	160	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
N.2.3	140	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
N.3.1	120	0,02	0,02	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,18
N.3.2	120	0,02	0,02	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,18
N.3.3	100	0,02	0,02	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,18
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1																	
S.3.2																	
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

Cutting data standard values – type UNI

Index	11 704 ...										
		8xD									
	with through coolant	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)									
P.1.1	100	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.1.2	80	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.3	80	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.4	75	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.1.5	75	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.1	80	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.2.2	75	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.2.3	75	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.4	60	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.1	75	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.2	60	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.3	35	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.1	40	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.2	25	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.1.1	30	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.2.1	30	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.3.1	30	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
K.1.1	100	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.1.2	80	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.2.1	80	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.2.2	75	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.1	80	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.2	75	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Index	with through coolant	11 705 ... 12xD Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)									
P.1.1	90	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.1.2	75	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.3	75	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.1.4	70	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.1.5	70	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.1	80	0,13	0,16	0,19	0,22	0,25	0,28	0,31	0,34	0,36	0,38
P.2.2	70	0,12	0,15	0,18	0,21	0,24	0,27	0,30	0,32	0,35	0,37
P.2.3	70	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.2.4	55	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.1	70	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.2	55	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.3.3	35	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.1	40	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
P.4.2	25	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.1.1	30	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.2.1	30	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
M.3.1	30	0,06	0,08	0,10	0,12	0,14	0,15	0,18	0,20	0,23	0,25
K.1.1	90	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.1.2	75	0,16	0,18	0,22	0,25	0,29	0,33	0,37	0,40	0,43	0,46
K.2.1	75	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.2.2	70	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.1	75	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
K.3.2	70	0,10	0,13	0,15	0,18	0,20	0,23	0,26	0,30	0,34	0,38
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

Cutting data standard values – type VA

Index	11 711 ..., 11 712 ...																
		3xD															
	without through coolant	≤ Ø 1	Ø 1–1,25	Ø 1,25–1,5	Ø 1,5–2	Ø 2–2,5	Ø 2,5–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)															
P.1.1	75	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.1.2																	
P.1.3																	
P.1.4																	
P.1.5																	
P.2.1	65	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.2.2	60	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.2.3																	
P.2.4																	
P.3.1																	
P.3.2																	
P.3.3																	
P.4.1	**45**	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.4.2	**30**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
M.1.1	**35**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
M.2.1	**35**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
M.3.1	**35**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
K.1.1																	
K.1.2																	
K.2.1																	
K.2.2																	
K.3.1																	
K.3.2																	
N.1.1	160	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.1.2	160	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.2.1	130	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.2.2	130	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.2.3	110	0,03	0,04	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
N.3.1	160	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.3.2	160	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.3.3	225	0,03	0,04	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1	30	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.3.2	20	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1	100	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,2	0,21
O.1.2	80	0,002	0,004	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,13	0,14	0,15
O.2.1																	
O.2.2																	
O.3.1																	

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine.
The specified values represent guideline cutting data that must be corrected according to the usage conditions.

Index	11 713 ..., 11 714 ..., 11 715 ..., 11 716 ...																	
		3xD / 5xD																
	with through coolant	≤ Ø 1	Ø 1–1,25	Ø 1,25–1,5	Ø 1,5–2	Ø 2–2,5	Ø 2,5–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)																
P.1.1	85	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1	75	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.2.2	65	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	**55**	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
P.4.2	**40**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
M.1.1	**45**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
M.2.1	**45**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
M.3.1	**45**	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1	**200**	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.1.2	**200**	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.2.1	**160**	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.2.2	**160**	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.2.3	**140**	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,2	0,23	0,24	0,26	0,27
N.3.1	**200**	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.3.2	**200**	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,16	0,20	0,24	0,27	0,31	0,32	0,34	0,36
N.3.3	**280**	0,03	0,03	0,04	0,05	0,07	0,08	0,10	0,11	0,12	0,15	0,18	0,20	0,23	0,24	0,26	0,27
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1	15	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.2.2	15	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.2.3	15	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.3.1	35	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.3.2	25	0,002	0,004	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,06	0,07	0,09	0,10	0,11	0,12	0,12
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1	120	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,09	0,11	0,13	0,15	0,17	0,19	0,20	0,21
O.1.2	100	0,002	0,004	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,13	0,14	0,15
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – Type N – Twist drills

Index	10 700 ..., 10 710 ...														
	3xD / 5xD														
	without through coolant	≤ Ø 1	Ø 1–1,5	Ø 1,5–2	Ø 2–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)													
P.1.1	75	0,03	0,05	0,07	0,10	0,12	0,14	0,16	0,2	0,24	0,28	0,31	0,35	0,40	0,45
P.1.2	65	0,03	0,05	0,07	0,10	0,12	0,14	0,16	0,2	0,24	0,28	0,31	0,35	0,40	0,45
P.1.3	65	0,03	0,05	0,07	0,10	0,12	0,14	0,16	0,2	0,24	0,28	0,31	0,35	0,40	0,45
P.1.4	65	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.1.5	65	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.2.1	70	0,03	0,05	0,07	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31	0,35	0,40	0,45
P.2.2	65	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.2.3	65	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.2.4	50	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.3.1	65	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.3.2	50	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
P.3.3															
P.4.1															
P.4.2															
M.1.1															
M.2.1															
M.3.1															
K.1.1	70	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
K.1.2	70	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
K.2.1	70	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
K.2.2	70	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
K.3.1	70	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
K.3.2	70	0,03	0,04	0,05	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23	0,26	0,29	0,33
N.1.1	200	0,01	0,01	0,01	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,15	0,18	0,20
N.1.2	200	0,01	0,01	0,01	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,15	0,18	0,20
N.2.1	160	0,01	0,01	0,01	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,15	0,18	0,20
N.2.2	160	0,01	0,01	0,01	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,15	0,18	0,20
N.2.3	130	0,01	0,01	0,01	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,15	0,18	0,20
N.3.1	160	0,003	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14	0,16	0,18	0,20
N.3.2	160	0,003	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14	0,16	0,18	0,20
N.3.3	100	0,003	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14	0,16	0,18	0,20
N.4.1	200	0,01	0,01	0,01	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13	0,15	0,18	0,20
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	30	0,002	0,003	0,003	0,01	0,01	0,02	0,03	0,04	0,05	0,06	0,07	0,08	0,09	0,10
S.3.2	20	0,002	0,003	0,003	0,01	0,01	0,02	0,03	0,04	0,05	0,06	0,07	0,08	0,09	0,10
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Cutting data standard values – WTX – SB

Index	10 767 ..., 10 772 ..., 10 783 ..., 10 788 ...					
	3xD					
	without through coolant	with through coolant	Ø 2–5	Ø 5–8	Ø 8–12	Ø 12–16
	v_c (m/min)		f (mm/rev)			
P.1.1	110	120	0,13	0,18	0,25	0,30
P.1.2	105	115	0,12	0,18	0,24	0,29
P.1.3	100	110	0,12	0,17	0,23	0,28
P.1.4	95	105	0,11	0,16	0,21	0,26
P.1.5	90	100	0,11	0,15	0,20	0,25
P.2.1	105	120	0,15	0,22	0,29	0,36
P.2.2	95	110	0,14	0,20	0,27	0,33
P.2.3	85	100	0,13	0,18	0,24	0,29
P.2.4	65	75	0,12	0,16	0,21	0,26
P.3.1	70	85	0,12	0,18	0,24	0,29
P.3.2	60	65	0,11	0,15	0,20	0,24
P.3.3	50	65	0,09	0,12	0,15	0,19
P.4.1	50	65	0,08	0,12	0,16	0,19
P.4.2	50	65	0,08	0,12	0,16	0,19
M.1.1						
M.2.1						
M.3.1						
K.1.1	85	120	0,17	0,26	0,36	0,45
K.1.2	75	100	0,15	0,22	0,29	0,36
K.2.1	100	160	0,17	0,25	0,34	0,42
K.2.2	75	100	0,15	0,22	0,29	0,36
K.3.1	80	90	0,16	0,23	0,32	0,39
K.3.2	70	80	0,14	0,19	0,25	0,31
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1	25	25	0,06	0,08	0,11	0,14
H.1.2						
H.1.3						
H.1.4						
H.2.1	35	35	0,08	0,11	0,14	0,18
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – Mini

Index	11 770 ...				
	5xD				
	without through coolant	≤ Ø 1,0	> Ø 1,0–1,5	> Ø 1,5–2,0	> Ø 2,0–2,9
	v_c (m/min)	f (mm/rev)			
P.1.1	75	0,01	0,01	0,013	0,015
P.1.2	65	0,02	0,02	0,025	0,03
P.1.3	65	0,01	0,01	0,013	0,015
P.1.4	65	0,01	0,01	0,013	0,015
P.1.5	70	0,01	0,01	0,013	0,015
P.2.1	70	0,01	0,01	0,013	0,015
P.2.2	65	0,01	0,01	0,013	0,015
P.2.3	65	0,02	0,02	0,025	0,03
P.2.4	65	0,01	0,01	0,013	0,015
P.3.1					
P.3.2					
P.3.3					
P.4.1					
P.4.2					
M.1.1					
M.2.1					
M.3.1					
K.1.1	70	0,01	0,01	0,013	0,015
K.1.2	70	0,01	0,01	0,013	0,015
K.2.1	70	0,01	0,01	0,013	0,015
K.2.2	70	0,01	0,01	0,013	0,015
K.3.1	70	0,01	0,01	0,013	0,015
K.3.2	70	0,01	0,01	0,013	0,015
N.1.1	200	0,01	0,01	0,013	0,015
N.1.2	200	0,01	0,01	0,013	0,015
N.2.1	160	0,01	0,01	0,013	0,015
N.2.2	180	0,01	0,01	0,013	0,015
N.2.3	130	0,01	0,01	0,013	0,015
N.3.1	160	0,01	0,01	0,013	0,015
N.3.2	160	0,01	0,01	0,013	0,015
N.3.3	100	0,01	0,01	0,013	0,015
N.4.1	200	0,01	0,01	0,013	0,015
S.1.1					
S.1.2					
S.2.1					
S.2.2					
S.2.3					
S.3.1	30	0,01	0,01	0,013	0,015
S.3.2	20	0,01	0,01	0,013	0,015
S.3.3					
H.1.1					
H.1.2					
H.1.3					
H.1.4					
H.2.1					
H.3.1					
O.1.1					
O.1.2					
O.2.1					
O.2.2					
O.3.1					

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – Micro

Index	10 693 ...							
	5xD							
	with through coolant	MMS	≤ Ø 1,0	> Ø 1,0–1,25	> Ø 1,25–1,5	> Ø 1,5–2,0	> Ø 2,0–2,5	> Ø 2,5–3,0
	v_c (m/min)		f (mm/rev)					
P.1.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
P.1.2	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.1.3	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.1.4	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.1.5	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.2.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
P.2.2	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.2.3	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.2.4								
P.3.1	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.3.2	50	34	0,028	0,034	0,045	0,070	0,095	0,115
P.3.3								
P.4.1	50		0,015	0,018	0,024	0,040	0,060	0,080
P.4.2	35		0,015	0,018	0,024	0,040	0,060	0,080
M.1.1	40		0,015	0,018	0,024	0,040	0,060	0,080
M.2.1	40		0,015	0,018	0,024	0,040	0,060	0,080
M.3.1	40		0,015	0,018	0,024	0,040	0,060	0,080
K.1.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.1.2	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.2.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.2.2	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.3.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.3.2	70	51	0,028	0,034	0,045	0,070	0,095	0,115
N.1.1								
N.1.2								
N.2.1								
N.2.2								
N.2.3								
N.3.1								
N.3.2								
N.3.3								
N.4.1								
S.1.1	15		0,015	0,018	0,024	0,040	0,060	0,080
S.1.2	15		0,015	0,018	0,024	0,040	0,060	0,080
S.2.1	10		0,015	0,018	0,024	0,040	0,060	0,080
S.2.2	10		0,015	0,018	0,024	0,040	0,060	0,080
S.2.3								
S.3.1	30		0,015	0,018	0,024	0,040	0,060	0,080
S.3.2	20		0,015	0,018	0,024	0,040	0,060	0,080
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1								
O.1.2								
O.2.1								
O.2.2								
O.3.1								

Cutting data standard values – WTX – Micro

Index	10 694 ..., 10 695 ...							
	8xD / 12xD							
	with through coolant	MMS	≤ Ø 1,0	> Ø 1,0–1,25	> Ø 1,25–1,5	> Ø 1,5–2,0	> Ø 2,0–2,5	> Ø 2,5–3,0
	v_c (m/min)		f (mm/rev)					
P.1.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
P.1.2	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.1.3	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.1.4	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.1.5	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.2.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
P.2.2	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.2.3	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.2.4								
P.3.1	60	43	0,028	0,034	0,045	0,070	0,095	0,115
P.3.2	50	34	0,028	0,034	0,045	0,070	0,095	0,115
P.3.3								
P.4.1	50		0,015	0,018	0,024	0,040	0,060	0,080
P.4.2	35		0,015	0,018	0,024	0,040	0,060	0,080
M.1.1	40		0,015	0,018	0,024	0,040	0,060	0,080
M.2.1	40		0,015	0,018	0,024	0,040	0,060	0,080
M.3.1	40		0,015	0,018	0,024	0,040	0,060	0,080
K.1.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.1.2	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.2.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.2.2	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.3.1	70	51	0,028	0,034	0,045	0,070	0,095	0,115
K.3.2	70	51	0,028	0,034	0,045	0,070	0,095	0,115
N.1.1								
N.1.2								
N.2.1								
N.2.2								
N.2.3								
N.3.1								
N.3.2								
N.3.3								
N.4.1								
S.1.1	15		0,015	0,018	0,024	0,040	0,060	0,080
S.1.2	15		0,015	0,018	0,024	0,040	0,060	0,080
S.2.1	10		0,015	0,018	0,024	0,040	0,060	0,080
S.2.2	10		0,015	0,018	0,024	0,040	0,060	0,080
S.2.3								
S.3.1	30		0,015	0,018	0,024	0,040	0,060	0,080
S.3.2	20		0,015	0,018	0,024	0,040	0,060	0,080
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1								
O.1.2								
O.2.1								
O.2.2								
O.3.1								

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	10 696 ..., 10 697 ..., 10 698 ..., 10 699 ...						
	16xD / 20xD / 25xD / 30xD						
	with through coolant	≤ Ø 1,0	> Ø 1,0–1,25	> Ø 1,25–1,5	> Ø 1,5–2,0	> Ø 2,0–2,5	> Ø 2,5–3,0
	v_c (m/min)	f (mm/rev)					
P.1.1	58	0,028	0,034	0,045	0,070	0,095	0,115
P.1.2	50	0,028	0,034	0,045	0,070	0,095	0,115
P.1.3	50	0,028	0,034	0,045	0,070	0,095	0,115
P.1.4	50	0,028	0,034	0,045	0,070	0,095	0,115
P.1.5	50	0,028	0,034	0,045	0,070	0,095	0,115
P.2.1	58	0,028	0,034	0,045	0,070	0,095	0,115
P.2.2	50	0,028	0,034	0,045	0,070	0,095	0,115
P.2.3	50	0,028	0,034	0,045	0,070	0,095	0,115
P.2.4							
P.3.1	50	0,028	0,034	0,045	0,070	0,095	0,115
P.3.2	42	0,028	0,034	0,045	0,070	0,095	0,115
P.3.3							
P.4.1	42	0,015	0,018	0,024	0,040	0,060	0,080
P.4.2	30	0,015	0,018	0,024	0,040	0,060	0,080
M.1.1	34	0,015	0,018	0,024	0,040	0,060	0,080
M.2.1	34	0,015	0,018	0,024	0,040	0,060	0,080
M.3.1	34	0,015	0,018	0,024	0,040	0,060	0,080
K.1.1	58	0,028	0,034	0,045	0,070	0,095	0,115
K.1.2	58	0,028	0,034	0,045	0,070	0,095	0,115
K.2.1	58	0,028	0,034	0,045	0,070	0,095	0,115
K.2.2	58	0,028	0,034	0,045	0,070	0,095	0,115
K.3.1	58	0,028	0,034	0,045	0,070	0,095	0,115
K.3.2	58	0,028	0,034	0,045	0,070	0,095	0,115
N.1.1							
N.1.2							
N.2.1							
N.2.2							
N.2.3							
N.3.1							
N.3.2							
N.3.3							
N.4.1							
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1							
S.3.2							
S.3.3							
H.1.1							
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1							
O.1.1							
O.1.2							
O.2.1							
O.2.2							
O.3.1							

Pilot hole required for WTX – Micro deep hole twist drill – see recommended application for WTX – Micro on → **page 161**

Cutting data standard values – WTX – Feed BR

Index	10 707 ..., 10 711 ...										
	3xD										
	with through coolant	With external coolant	MMS	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16
	v_c (m/min)			f (mm/rev)							
P.1.1	75	70	70	0,19	0,22	0,25	0,31	0,36	0,40	0,44	0,47
P.1.2	75	65	65	0,18	0,21	0,24	0,30	0,34	0,39	0,42	0,45
P.1.3	70	65	65	0,17	0,20	0,23	0,28	0,33	0,37	0,40	0,43
P.1.4	65	60	60	0,16	0,19	0,22	0,27	0,31	0,35	0,38	0,41
P.1.5	65	55	55	0,16	0,18	0,21	0,25	0,29	0,33	0,36	0,39
P.2.1	75	65	65	0,22	0,26	0,30	0,37	0,43	0,48	0,52	0,56
P.2.2	70	60	60	0,20	0,24	0,27	0,33	0,39	0,43	0,47	0,51
P.2.3	65	55	55	0,18	0,22	0,25	0,30	0,35	0,39	0,43	0,46
P.2.4	50	40	40	0,17	0,20	0,22	0,27	0,31	0,35	0,38	0,40
P.3.1	55	45	45	0,18	0,21	0,24	0,30	0,35	0,39	0,43	0,46
P.3.2	40	40	40	0,15	0,18	0,20	0,25	0,29	0,32	0,35	0,37
P.3.3	40	30	35	0,13	0,15	0,16	0,20	0,23	0,25	0,27	0,29
P.4.1	40	30	35	0,12	0,14	0,16	0,20	0,23	0,26	0,28	0,30
P.4.2	40	30	35	0,12	0,14	0,16	0,20	0,23	0,26	0,28	0,30
M.1.1	40	25	25	0,09	0,11	0,12	0,15	0,17	0,19	0,21	0,23
M.2.1	35	20	20	0,08	0,09	0,10	0,13	0,15	0,17	0,18	0,19
M.3.1	35	20	20	0,08	0,09	0,10	0,13	0,15	0,17	0,18	0,19
K.1.1	100	70	70	0,25	0,30	0,35	0,45	0,53	0,60	0,66	0,71
K.1.2	85	65	65	0,22	0,26	0,30	0,37	0,43	0,48	0,53	0,56
K.2.1	135	85	100	0,24	0,29	0,34	0,42	0,49	0,56	0,61	0,66
K.2.2	85	65	65	0,22	0,26	0,30	0,37	0,43	0,48	0,53	0,56
K.3.1	75	70	70	0,23	0,28	0,32	0,39	0,46	0,52	0,57	0,61
K.3.2	70	60	60	0,20	0,23	0,26	0,32	0,37	0,41	0,45	0,48
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Index	10 713 ..., 10 719 ...												
	5xD												
	with through coolant	With external coolant	MMS	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20
	v_c (m/min)			f (mm/rev)									
P.1.1	75	70	70	0,19	0,22	0,25	0,31	0,36	0,40	0,44	0,47	0,50	0,52
P.1.2	75	65	65	0,18	0,21	0,24	0,30	0,34	0,39	0,42	0,45	0,48	0,50
P.1.3	70	65	65	0,17	0,20	0,23	0,28	0,33	0,37	0,40	0,43	0,45	0,47
P.1.4	65	60	60	0,16	0,19	0,22	0,27	0,31	0,35	0,38	0,41	0,43	0,45
P.1.5	65	55	55	0,16	0,18	0,21	0,25	0,29	0,33	0,36	0,39	0,41	0,43
P.2.1	75	65	65	0,22	0,26	0,30	0,37	0,43	0,48	0,52	0,56	0,59	0,62
P.2.2	70	60	60	0,20	0,24	0,27	0,33	0,39	0,43	0,47	0,51	0,54	0,56
P.2.3	65	55	55	0,18	0,22	0,25	0,30	0,35	0,39	0,43	0,46	0,48	0,50
P.2.4	50	40	40	0,17	0,20	0,22	0,27	0,31	0,35	0,38	0,40	0,42	0,44
P.3.1	55	45	45	0,18	0,21	0,24	0,30	0,35	0,39	0,43	0,46	0,48	0,50
P.3.2	40	40	40	0,15	0,18	0,20	0,25	0,29	0,32	0,35	0,37	0,39	0,41
P.3.3	40	30	35	0,13	0,15	0,16	0,20	0,23	0,25	0,27	0,29	0,30	0,32
P.4.1	40	30	35	0,12	0,14	0,16	0,20	0,23	0,26	0,28	0,30	0,32	0,33
P.4.2	40	30	35	0,12	0,14	0,16	0,20	0,23	0,26	0,28	0,30	0,32	0,33
M.1.1	40	25	25	0,09	0,11	0,12	0,15	0,17	0,19	0,21	0,23	0,24	0,25
M.2.1	35	20	20	0,08	0,09	0,10	0,13	0,15	0,17	0,18	0,19	0,20	0,21
M.3.1	35	20	20	0,08	0,09	0,10	0,13	0,15	0,17	0,18	0,19	0,20	0,21
K.1.1	100	70	70	0,25	0,30	0,35	0,45	0,53	0,60	0,66	0,71	0,75	0,79
K.1.2	85	65	65	0,22	0,26	0,30	0,37	0,43	0,48	0,53	0,56	0,60	0,62
K.2.1	135	85	100	0,24	0,29	0,34	0,42	0,49	0,56	0,61	0,66	0,69	0,72
K.2.2	85	65	65	0,22	0,26	0,30	0,37	0,43	0,48	0,53	0,56	0,60	0,62
K.3.1	75	70	70	0,23	0,28	0,32	0,39	0,46	0,52	0,57	0,61	0,64	0,67
K.3.2	70	60	60	0,20	0,23	0,26	0,32	0,37	0,41	0,45	0,48	0,51	0,53
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1													
N.3.2													
N.3.3													
N.4.1													
S.1.1													
S.1.2													
S.2.1													
S.2.2													
S.2.3													
S.3.1													
S.3.2													
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Cutting data standard values – WTX – Co-pilot deep hole twist drills

Index	11 018 ...					
	20xD					
	with through coolant	Ø 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10
	v_c (m/min)	f (mm/rev)				
P.1.1	100	0,07	0,08	0,10	0,12	0,14
P.1.2	90	0,07	0,08	0,10	0,12	0,14
P.1.3	90	0,05	0,06	0,08	0,10	0,11
P.1.4	90	0,05	0,06	0,08	0,10	0,11
P.1.5	95	0,05	0,06	0,08	0,10	0,11
P.2.1	95	0,07	0,08	0,10	0,12	0,14
P.2.2	90	0,05	0,06	0,08	0,10	0,11
P.2.3	90	0,07	0,08	0,10	0,12	0,14
P.2.4	90	0,05	0,06	0,08	0,10	0,11
P.3.1	45	0,03	0,04	0,05	0,06	0,08
P.3.2	70	0,05	0,06	0,08	0,10	0,11
P.3.3	70	0,05	0,06	0,08	0,10	0,11
P.4.1	70	0,03	0,04	0,05	0,06	0,08
P.4.2	45	0,03	0,04	0,05	0,06	0,08
M.1.1	50	0,03	0,04	0,05	0,06	0,08
M.2.1	50	0,03	0,04	0,05	0,06	0,08
M.3.1	50	0,03	0,04	0,05	0,06	0,08
K.1.1	100	0,10	0,13	0,15	0,19	0,23
K.1.2	95	0,10	0,13	0,15	0,19	0,23
K.2.1	100	0,08	0,10	0,13	0,16	0,18
K.2.2	95	0,08	0,10	0,13	0,16	0,18
K.3.1	100	0,08	0,10	0,13	0,16	0,18
K.3.2	95	0,08	0,10	0,13	0,16	0,18
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3	70	0,05	0,06	0,08	0,10	0,11
S.3.1	30	0,01	0,02	0,02	0,03	0,04
S.3.2	20	0,01	0,02	0,02	0,03	0,04
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – TB UNI

Index	11 016 ... 16xD with through coolant v_c (m/min)	Ø 2–3	Ø > 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	Ø > 10–12	11 020 ... 20xD with through coolant v_c (m/min)	Ø 2–3	Ø > 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	Ø > 10–12
		f (mm/rev)								f (mm/rev)						
P.1.1	105	0,05	0,07	0,08	0,10	0,12	0,14	0,16	100	0,05	0,07	0,08	0,10	0,12	0,14	0,16
P.1.2	95	0,05	0,07	0,08	0,10	0,12	0,14	0,16	90	0,05	0,07	0,08	0,10	0,12	0,14	0,16
P.1.3	95	0,04	0,05	0,06	0,08	0,10	0,11	0,13	90	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.1.4	95	0,04	0,05	0,06	0,08	0,10	0,11	0,13	90	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.1.5	100	0,04	0,05	0,06	0,01	0,10	0,11	0,13	95	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.2.1	100	0,05	0,07	0,08	0,10	0,12	0,14	0,16	95	0,05	0,07	0,08	0,10	0,12	0,14	0,16
P.2.2	95	0,04	0,05	0,06	0,10	0,10	0,11	0,13	90	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.2.3	95	0,05	0,07	0,08	0,10	0,12	0,14	0,16	90	0,05	0,07	0,08	0,10	0,12	0,14	0,16
P.2.4	95	0,04	0,05	0,06	0,10	0,10	0,11	0,13	90	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.3.1	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.3.2	75	0,04	0,05	0,06	0,10	0,10	0,11	0,13	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.3.3	75	0,04	0,05	0,06	0,10	0,10	0,11	0,13	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.4.1	75	0,03	0,03	0,04	0,05	0,06	0,08	0,10	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.4.2	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10
M.1.1	55	0,03	0,03	0,04	0,05	0,06	0,08	0,10	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10
M.2.1	55	0,03	0,03	0,04	0,05	0,06	0,08	0,10	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10
M.3.1	55	0,03	0,03	0,04	0,05	0,06	0,08	0,10	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.1.1	105	0,08	0,10	0,13	0,15	0,19	0,23	0,27	100	0,08	0,10	0,13	0,15	0,19	0,23	0,27
K.1.2	100	0,08	0,10	0,13	0,15	0,19	0,23	0,27	95	0,08	0,10	0,13	0,15	0,19	0,23	0,27
K.2.1	105	0,06	0,08	0,10	0,13	0,16	0,18	0,22	100	0,06	0,08	0,10	0,13	0,16	0,18	0,22
K.2.2	100	0,06	0,08	0,10	0,13	0,16	0,18	0,22	95	0,06	0,08	0,10	0,13	0,16	0,18	0,22
K.3.1	105	0,06	0,08	0,10	0,13	0,16	0,18	0,22	100	0,06	0,08	0,10	0,13	0,16	0,18	0,22
K.3.2	100	0,06	0,08	0,10	0,13	0,16	0,18	0,22	95	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3	75	0,04	0,05	0,06	0,08	0,10	0,11	0,13	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13
S.3.1	35	0,01	0,01	0,02	0,02	0,03	0,04	0,05	30	0,01	0,01	0,02	0,02	0,03	0,04	0,05
S.3.2	25	0,01	0,01	0,02	0,02	0,03	0,04	0,05	20	0,01	0,01	0,02	0,02	0,03	0,04	0,05
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

All solid carbide WTX deep hole drills must be used with a pilot bore. The tool must never be run at high speed while not engaged in a material.
Please refer to the strategy for the production of deep holes on → **Page 160**.

Cutting data standard values – WTX – TB UNI

Index	11 025 ...								11 030 ...							
	25xD								30xD							
	with through coolant	Ø 2–3	Ø > 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	Ø > 10–12	with through coolant	Ø 2–3	Ø > 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	Ø > 10–12
	v_c (m/min)	f (mm/rev)							v_c (m/min)	f (mm/rev)						
P.1.1	90	0,05	0,07	0,09	0,10	0,12	0,14	0,16	85	0,05	0,07	0,09	0,10	0,12	0,14	0,16
P.1.2	80	0,05	0,07	0,09	0,10	0,12	0,14	0,16	75	0,05	0,07	0,09	0,10	0,12	0,14	0,16
P.1.3	80	0,04	0,05	0,06	0,08	0,10	0,11	0,13	75	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.1.4	80	0,04	0,05	0,06	0,08	0,10	0,11	0,13	75	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.1.5	85	0,04	0,05	0,06	0,08	0,10	0,11	0,13	80	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.2.1	85	0,05	0,07	0,09	0,10	0,12	0,14	0,16	80	0,05	0,07	0,09	0,10	0,12	0,14	0,16
P.2.2	80	0,04	0,05	0,06	0,08	0,10	0,11	0,13	75	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.2.3	80	0,05	0,07	0,09	0,10	0,12	0,14	0,16	75	0,05	0,07	0,09	0,10	0,12	0,14	0,16
P.2.4	80	0,04	0,05	0,06	0,08	0,10	0,11	0,13	75	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.3.1	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10	40	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.3.2	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	60	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.3.3	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	60	0,04	0,05	0,06	0,08	0,10	0,11	0,13
P.4.1	65	0,03	0,03	0,04	0,05	0,06	0,08	0,10	60	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.4.2	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10	40	0,03	0,03	0,04	0,05	0,06	0,08	0,10
M.1.1	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10
M.2.1	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10
M.3.1	50	0,03	0,03	0,04	0,05	0,06	0,08	0,10	45	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.1.1	90	0,08	0,10	0,13	0,15	0,19	0,23	0,27	85	0,08	0,10	0,13	0,15	0,19	0,23	0,27
K.1.2	85	0,08	0,10	0,13	0,15	0,19	0,23	0,27	80	0,08	0,10	0,13	0,15	0,19	0,23	0,27
K.2.1	90	0,06	0,08	0,10	0,13	0,16	0,18	0,22	85	0,06	0,08	0,10	0,13	0,16	0,18	0,22
K.2.2	85	0,06	0,08	0,10	0,13	0,16	0,18	0,22	80	0,06	0,08	0,10	0,13	0,16	0,18	0,22
K.3.1	90	0,06	0,08	0,10	0,13	0,16	0,18	0,22	85	0,06	0,08	0,10	0,13	0,16	0,18	0,22
K.3.2	85	0,06	0,08	0,10	0,13	0,16	0,18	0,22	80	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	60	0,04	0,05	0,06	0,08	0,10	0,11	0,13
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	11 040 ... 40xD						11 050 ... 50xD				
	with through coolant	Ø 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	with through coolant	Ø 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)			
P.1.1	70	0,05	0,06	0,08	0,10	0,11	70	0,05	0,06	0,08	0,10
P.1.2	60	0,05	0,06	0,08	0,10	0,11	60	0,05	0,06	0,08	0,10
P.1.3	60	0,03	0,04	0,05	0,06	0,08	60	0,03	0,04	0,05	0,06
P.1.4	60	0,03	0,04	0,05	0,06	0,08	60	0,03	0,04	0,05	0,06
P.1.5	65	0,03	0,04	0,05	0,06	0,08	65	0,03	0,04	0,05	0,06
P.2.1	65	0,05	0,06	0,08	0,10	0,11	65	0,05	0,06	0,08	0,10
P.2.2	60	0,03	0,04	0,05	0,06	0,08	60	0,03	0,04	0,05	0,06
P.2.3	60	0,05	0,06	0,08	0,10	0,11	60	0,05	0,06	0,08	0,10
P.2.4	60	0,03	0,04	0,05	0,06	0,08	60	0,03	0,04	0,05	0,06
P.3.1	35	0,03	0,03	0,04	0,05	0,06	35	0,03	0,03	0,04	0,05
P.3.2	50	0,03	0,04	0,05	0,06	0,08	50	0,03	0,04	0,05	0,06
P.3.3	50	0,03	0,04	0,05	0,06	0,08	50	0,03	0,04	0,05	0,06
P.4.1	50	0,03	0,03	0,04	0,05	0,06	50	0,03	0,03	0,04	0,05
P.4.2	35	0,03	0,03	0,04	0,05	0,06	35	0,03	0,03	0,04	0,05
M.1.1	40	0,03	0,03	0,04	0,05	0,06	40	0,03	0,03	0,04	0,05
M.2.1	40	0,03	0,03	0,04	0,05	0,06	40	0,03	0,03	0,04	0,05
M.3.1	40	0,03	0,03	0,04	0,05	0,06	40	0,03	0,03	0,04	0,05
K.1.1	70	0,08	0,10	0,13	0,16	0,18	70	0,08	0,10	0,13	0,16
K.1.2	65	0,08	0,10	0,13	0,16	0,18	65	0,08	0,10	0,13	0,16
K.2.1	70	0,07	0,09	0,10	0,12	0,14	70	0,07	0,09	0,10	0,12
K.2.2	65	0,07	0,09	0,10	0,12	0,14	65	0,07	0,09	0,10	0,12
K.3.1	70	0,07	0,09	0,10	0,12	0,14	70	0,07	0,09	0,10	0,12
K.3.2	65	0,07	0,09	0,10	0,12	0,14	65	0,07	0,09	0,10	0,12
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3	50	0,03	0,04	0,05	0,06	0,08	50	0,03	0,04	0,05	0,06
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

All solid carbide WTX deep hole drills must be used with a pilot bore. The tool must never be run at high speed while not engaged in a material.
Please refer to the strategy for the production of deep holes on → **Page 160**.

Cutting data standard values – WTX – TB ALU

Index	11 017 ... 16xD								11 021 ... 20xD							
	with through coolant	Ø 2–3	Ø > 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	Ø > 10–12	with through coolant	Ø 2–3	Ø > 3–4	Ø > 4–5	Ø > 5–6	Ø > 6–8	Ø > 8–10	Ø > 10–12
	v_c (m/min)	f (mm/rev)							v_c (m/min)	f (mm/rev)						
P.1.1																
P.1.2																
P.1.3																
P.1.4																
P.1.5																
P.2.1																
P.2.2																
P.2.3																
P.2.4																
P.3.1																
P.3.2																
P.3.3																
P.4.1																
P.4.2																
M.1.1																
M.2.1																
M.3.1																
K.1.1																
K.1.2																
K.2.1																
K.2.2																
K.3.1																
K.3.2																
N.1.1	**160**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**150**	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.1.2	**180**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**170**	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.2.1	**160**	0,08	0,11	0,13	0,15	0,19	0,23	0,26	**150**	0,08	0,11	0,13	0,15	0,19	0,23	0,26
N.2.2	**190**	0,08	0,11	0,13	0,15	0,19	0,23	0,26	**180**	0,08	0,11	0,13	0,15	0,19	0,23	0,26
N.2.3	**140**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**130**	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.3.1	**115**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**100**	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.3.2	**115**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**100**	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.3.3	**90**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**80**	0,06	0,08	0,10	0,13	0,16	0,18	0,22
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

Index	11 026 ... 25xD with through coolant	Ø 2–3	> 3–4	> 4–5	> 5–6	> 6–8	> 8–10	> 10–12	11 031 ... 30xD with through coolant	Ø 2–3	> 3–4	> 4–5	> 5–6	> 6–8	> 8–10	> 10–12
	v_c (m/min)	f (mm/rev)							v_c (m/min)	f (mm/rev)						
P.1.1																
P.1.2																
P.1.3																
P.1.4																
P.1.5																
P.2.1																
P.2.2																
P.2.3																
P.2.4																
P.3.1																
P.3.2																
P.3.3																
P.4.1																
P.4.2																
M.1.1																
M.2.1																
M.3.1																
K.1.1																
K.1.2																
K.2.1																
K.2.2																
K.3.1																
K.3.2																
N.1.1	**130**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**120**	0,04	0,05	0,07	0,08	0,12	0,15	0,18
N.1.2	**150**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**140**	0,04	0,05	0,07	0,08	0,12	0,15	0,18
N.2.1	**130**	0,08	0,11	0,13	0,15	0,19	0,23	0,26	**120**	0,08	0,11	0,13	0,15	0,19	0,23	0,26
N.2.2	**160**	0,08	0,11	0,13	0,15	0,19	0,23	0,26	**150**	0,08	0,11	0,13	0,15	0,19	0,23	0,26
N.2.3	**120**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**110**	0,04	0,05	0,07	0,08	0,12	0,15	0,18
N.3.1	**90**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**80**	0,04	0,05	0,07	0,08	0,12	0,15	0,18
N.3.2	**90**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**80**	0,04	0,05	0,07	0,08	0,12	0,15	0,18
N.3.3	**75**	0,06	0,08	0,10	0,13	0,16	0,18	0,22	**70**	0,01	0,01	0,02	0,02	0,03	0,04	0,05
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

All solid carbide WTX deep hole drills must be used with a pilot bore. The tool must never be run at high speed while not engaged in a material.
Please refer to the strategy for the production of deep holes on → **Page 160**.

Cutting data standard values – Solid Carbide NC Spot Drills, Centre Drills

Index	10 709 ..., 10 712 ..., 10 714 ... MultiChange						10 708 ... ZB							
	without through coolant	Ø 8	Ø 10	Ø 12	Ø 16	Ø 20	without through coolant	Ø 0,5–1,5	Ø 1,5–2	Ø 2–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)						
P.1.1	160	0,08	0,10	0,11	0,14	0,16	75	0,03	0,04	0,05	0,07	0,08	0,10	0,12
P.1.2	160	0,08	0,10	0,11	0,14	0,16	65	0,03	0,04	0,05	0,07	0,08	0,10	0,12
P.1.3	160	0,08	0,10	0,11	0,14	0,16	65	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.1.4	160	0,08	0,10	0,11	0,14	0,16	65	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.1.5	130	0,08	0,09	0,11	0,13	0,15	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.2.1	145	0,08	0,10	0,11	0,14	0,16	70	0,03	0,04	0,05	0,07	0,08	0,10	0,12
P.2.2	100	0,07	0,08	0,10	0,12	0,14	65	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.2.3	80	0,07	0,08	0,10	0,12	0,14	65	0,03	0,04	0,05	0,07	0,08	0,10	0,12
P.2.4	80	0,07	0,08	0,10	0,12	0,14	65	0,03	0,03	0,04	0,05	0,06	0,08	0,10
P.3.1	95	0,08	0,09	0,11	0,13	0,16								
P.3.2	95	0,08	0,09	0,11	0,13	0,16								
P.3.3	95	0,08	0,09	0,11	0,13	0,16								
P.4.1	65	0,04	0,05	0,05	0,07	0,08								
P.4.2	65	0,04	0,05	0,05	0,07	0,08								
M.1.1	45	0,05	0,06	0,07	0,08	0,10								
M.2.1	45	0,05	0,06	0,07	0,08	0,10								
M.3.1	40	0,04	0,05	0,06	0,07	0,08								
K.1.1	175	0,13	0,16	0,19	0,24	0,27	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.1.2	160	0,11	0,14	0,16	0,20	0,23	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.2.1	130	0,09	0,11	0,13	0,17	0,19	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.2.2	130	0,09	0,11	0,13	0,17	0,19	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.3.1	160	0,11	0,14	0,16	0,20	0,23	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
K.3.2	130	0,09	0,11	0,13	0,17	0,19	70	0,03	0,03	0,04	0,05	0,06	0,08	0,10
N.1.1	600	0,13	0,16	0,19	0,24	0,27	200	0,01	0,01	0,01	0,01	0,02	0,02	0,03
N.1.2	400	0,14	0,17	0,20	0,25	0,29	200	0,01	0,01	0,01	0,01	0,02	0,02	0,03
N.2.1	320	0,15	0,18	0,21	0,26	0,30	160	0,01	0,01	0,01	0,01	0,02	0,02	0,03
N.2.2	320	0,15	0,18	0,21	0,26	0,30	180	0,01	0,01	0,01	0,01	0,02	0,02	0,03
N.2.3	230	0,16	0,19	0,23	0,28	0,33	130	0,01	0,01	0,01	0,01	0,02	0,02	0,03
N.3.1	175	0,11	0,13	0,15	0,19	0,22	160	0,01	0,01	0,01	0,01	0,01	0,01	0,02
N.3.2	230	0,11	0,13	0,15	0,19	0,22	160	0,01	0,01	0,01	0,01	0,01	0,01	0,02
N.3.3	175	0,11	0,13	0,15	0,19	0,22	100	0,01	0,01	0,01	0,01	0,01	0,01	0,02
N.4.1	290	0,07	0,08	0,09	0,12	0,14								
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Index	10 702 ..., 10 703 ..., 10 704 ...											
	NC-A											
	without through coolant	Ø 2–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)										
P.1.1	75	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.1.2	65	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.1.3	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.1.4	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.1.5	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.2.1	70	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.2.2	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.2.3	65	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.2.4	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1	70	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,27
K.1.2	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.2.1	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.2.2	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.3.1	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.3.2	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
N.1.1	200	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.1.2	200	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.2.1	160	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.2.2	180	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.2.3	130	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.3.1	160	0,01	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14
N.3.2	160	0,01	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14
N.3.3	100	0,01	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – Solid Carbide NC-A TiAlN

Index	10 716 ..., 10 717 ..., 10 718 ... NC-A TiAlN											
	without through coolant	Ø 2–3	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16	Ø 16–18	Ø 18–20
	v_c (m/min)	f (mm/rev)										
P.1.1	75	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.1.2	65	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.1.3	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.1.4	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.1.5	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.2.1	70	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.2.2	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.2.3	65	0,05	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24	0,28	0,31
P.2.4	65	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1	70	0,04	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20	0,23	0,26
K.1.2	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.2.1	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.2.2	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.3.1	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
K.3.2	70	0,04	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18	0,20	0,23
N.1.1	200	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.1.2	200	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.2.1	160	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.2.2	180	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.2.3	130	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09	0,11	0,13
N.3.1	160	0,01	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14
N.3.2	160	0,01	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14
N.3.3	100	0,01	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09	0,11	0,14
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1	28	0,02	0,03	0,04	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,08
H.1.2	16	0,02	0,03	0,04	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,08
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Index	10 724 ..., 10 726 ..., 10 727 ...								
	NC-A TiAlN								
	without through coolant	Ø 3–4	Ø 4–5	Ø 5–6	Ø 6–8	Ø 8–10	Ø 10–12	Ø 12–14	Ø 14–16
	v_c (m/min)	f (mm/rev)							
P.1.1	75	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24
P.1.2	65	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24
P.1.3	65	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
P.1.4	65	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
P.1.5	70	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
P.2.1	70	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24
P.2.2	65	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
P.2.3	65	0,07	0,08	0,10	0,12	0,14	0,16	0,20	0,24
P.2.4	65	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
P.3.1									
P.3.2									
P.3.3									
P.4.1									
P.4.2									
M.1.1									
M.2.1									
M.3.1									
K.1.1	70	0,05	0,06	0,08	0,10	0,13	0,15	0,18	0,20
K.1.2	70	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
K.2.1	70	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
K.2.2	70	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
K.3.1	70	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
K.3.2	70	0,05	0,06	0,08	0,10	0,11	0,13	0,15	0,18
N.1.1	200	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09
N.1.2	200	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09
N.2.1	160	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09
N.2.2	180	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09
N.2.3	130	0,01	0,02	0,02	0,03	0,04	0,05	0,07	0,09
N.3.1	160	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09
N.3.2	160	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09
N.3.3	100	0,01	0,01	0,01	0,02	0,03	0,04	0,06	0,09
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1	30	0,03	0,04	0,04	0,05	0,06	0,06	0,07	0,07
H.1.2	15	0,03	0,04	0,04	0,05	0,06	0,06	0,07	0,07
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – WTX – Change

Index	10 919 ...					
	UNI					
	v_c (m/min)	≥ Ø 12–15,7	> Ø 15,7–20	> Ø 20–25	> Ø 25–32	> Ø 32–41
		f (mm/rev)				
P.1.1	120	0,27	0,31	0,34	0,36	0,36
P.1.2	115	0,26	0,30	0,32	0,34	0,35
P.1.3	110	0,25	0,28	0,31	0,32	0,33
P.1.4	105	0,24	0,27	0,29	0,31	0,31
P.1.5	100	0,22	0,25	0,28	0,29	0,30
P.2.1	120	0,32	0,37	0,40	0,42	0,43
P.2.2	110	0,29	0,33	0,36	0,38	0,39
P.2.3	100	0,26	0,30	0,33	0,35	0,35
P.2.4	75	0,23	0,26	0,29	0,30	0,31
P.3.1	85	0,26	0,30	0,33	0,35	0,35
P.3.2	65	0,22	0,25	0,27	0,28	0,29
P.3.3	65	0,17	0,19	0,21	0,22	0,22
P.4.1	65	0,17	0,20	0,22	0,23	0,23
P.4.2	65	0,17	0,20	0,22	0,23	0,23
M.1.1						
M.2.1						
M.3.1						
K.1.1	110	0,37	0,42	0,46	0,49	0,50
K.1.2	90	0,29	0,33	0,36	0,38	0,39
K.2.1	145	0,34	0,39	0,42	0,45	0,46
K.2.2	90	0,29	0,33	0,36	0,38	0,39
K.3.1	80	0,35	0,40	0,44	0,46	0,47
K.3.2	70	0,28	0,32	0,34	0,36	0,37
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Index	10 923 ...					
	P					
	v_c (m/min)	≥ Ø 12–15,7	> Ø 15,7–20	> Ø 20–25	> Ø 25–32	> Ø 32–41
		f (mm/rev)				
P.1.1	120	0,32	0,36	0,39	0,41	0,42
P.1.2	115	0,30	0,34	0,37	0,39	0,40
P.1.3	110	0,29	0,32	0,35	0,37	0,38
P.1.4	105	0,27	0,31	0,34	0,35	0,36
P.1.5	100	0,26	0,29	0,32	0,34	0,34
P.2.1	120	0,37	0,42	0,46	0,49	0,49
P.2.2	110	0,34	0,38	0,42	0,44	0,45
P.2.3	100	0,30	0,35	0,38	0,40	0,40
P.2.4	75	0,27	0,30	0,33	0,35	0,35
P.3.1	85	0,30	0,35	0,38	0,40	0,40
P.3.2	65	0,25	0,28	0,31	0,32	0,33
P.3.3	65	0,19	0,22	0,24	0,25	0,25
P.4.1	65	0,20	0,23	0,25	0,26	0,27
P.4.2	65	0,20	0,23	0,25	0,26	0,27
M.1.1						
M.2.1						
M.3.1						
K.1.1	110	0,41	0,47	0,51	0,54	0,55
K.1.2	90	0,33	0,37	0,41	0,43	0,43
K.2.1	145	0,38	0,43	0,47	0,50	0,51
K.2.2	90	0,33	0,37	0,41	0,43	0,43
K.3.1	80	0,35	0,40	0,44	0,46	0,47
K.3.2	70	0,28	0,32	0,34	0,36	0,37
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

For through holes, the feed must be reduced by approx. 30% when exiting the hole. For more accurate positioning, precentre with a 142° NC spot drill.
With Type VA 5xD and 8xD, enter the hole with reduced feed of 0.05 – 0.06 mm/revolution.

Cutting data standard values – WTX – Change

Index	10 921 ... VA					10 924 ... GG				
	v_c (m/min)	f (mm/rev)				v_c (m/min)	f (mm/rev)			
		≥ Ø 12–15,7	> Ø 15,7–20	> Ø 20–25	> Ø 25–32		≥ Ø 12–15,7	> Ø 15,7–20	> Ø 20–25	> Ø 25–32
P.1.1	110	0,25	0,28	0,30	0,32					
P.1.2	105	0,24	0,27	0,29	0,31					
P.1.3	100	0,22	0,25	0,28	0,29					
P.1.4	95	0,21	0,24	0,26	0,28					
P.1.5	90	0,20	0,23	0,25	0,26					
P.2.1	110	0,29	0,33	0,36	0,38					
P.2.2	100	0,26	0,30	0,33	0,35					
P.2.3	90	0,24	0,27	0,29	0,31					
P.2.4	70	0,21	0,24	0,26	0,27					
P.3.1	75	0,24	0,27	0,30	0,31					
P.3.2	60	0,19	0,22	0,24	0,25					
P.3.3	60	0,15	0,17	0,18	0,19					
P.4.1	60	0,16	0,18	0,19	0,20					
P.4.2	60	0,16	0,18	0,19	0,20					
M.1.1	**55**	0,20	0,23	0,25	0,26					
M.2.1	**50**	0,17	0,19	0,21	0,22					
M.3.1	**50**	0,17	0,19	0,21	0,22					
K.1.1	**95**	0,37	0,42	0,46	0,49	**120**	0,49	0,56	0,62	0,65
K.1.2	**80**	0,29	0,33	0,36	0,38	**100**	0,39	0,45	0,49	0,51
K.2.1	**130**	0,34	0,39	0,42	0,45	**160**	0,45	0,52	0,57	0,60
K.2.2	**80**	0,29	0,33	0,36	0,38	**100**	0,39	0,45	0,49	0,51
K.3.1	**70**	0,32	0,36	0,39	0,41	**90**	0,42	0,48	0,52	0,55
K.3.2	**65**	0,25	0,28	0,31	0,33	**80**	0,34	0,38	0,41	0,44
N.1.1										
N.1.2										
N.2.1										
N.2.2										
N.2.3										
N.3.1										
N.3.2										
N.3.3										
N.4.1										
S.1.1	**30**	0,14	0,16	0,17	0,18					
S.1.2	**20**	0,10	0,11	0,12	0,13					
S.2.1	**20**	0,10	0,11	0,12	0,13					
S.2.2	**15**	0,12	0,14	0,15	0,16					
S.2.3	**15**	0,10	0,11	0,12	0,13					
S.3.1	**40**	0,17	0,20	0,22	0,23					
S.3.2	**30**	0,15	0,17	0,18	0,19					
S.3.3	**25**	0,12	0,14	0,15	0,16					
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Index	10 922 ... AL				
		≥ Ø 12–15,7	> Ø 15,7–20	> Ø 20–25	> Ø 25–32
	v_c (m/min)	f (mm/rev)			
P.1.1					
P.1.2					
P.1.3					
P.1.4					
P.1.5					
P.2.1					
P.2.2					
P.2.3					
P.2.4					
P.3.1					
P.3.2					
P.3.3					
P.4.1					
P.4.2					
M.1.1					
M.2.1					
M.3.1					
K.1.1					
K.1.2					
K.2.1					
K.2.2					
K.3.1					
K.3.2					
N.1.1	330	0,27	0,31	0,34	0,36
N.1.2	300	0,25	0,28	0,31	0,32
N.2.1	250	0,33	0,37	0,41	0,43
N.2.2	220	0,33	0,37	0,41	0,43
N.2.3	180	0,33	0,37	0,41	0,43
N.3.1	200	0,41	0,47	0,51	0,54
N.3.2	120	0,33	0,37	0,41	0,43
N.3.3	140	0,25	0,28	0,31	0,32
N.4.1					
S.1.1					
S.1.2					
S.2.1					
S.2.2					
S.2.3					
S.3.1					
S.3.2					
S.3.3					
H.1.1					
H.1.2					
H.1.3					
H.1.4					
H.2.1					
H.3.1					
O.1.1					
O.1.2					
O.2.1					
O.2.2					
O.3.1					

With through-holes the feedrate should be reduced at the break out by approx. 30 %. Use 142° NC Spot Drill to ensure positional accuracy.
Use reduced feedrate of 0.05 – 0.06 mm/U when using type VA 5xD and 8xD drill.

Cutting data standard values – WTX – Change Feed

Index	10 925 ...							
	UNI							
	with through coolant	With external coolant	MMS	≥ Ø 14,0	> Ø 17,5	> Ø 21,5	> Ø 26,0	Ø 32,0
	v_c (m/min)			f (mm/rev)				
P.1.1	100	90	90	0,45	0,51	0,55	0,58	0,60
P.1.2	95	85	85	0,43	0,48	0,53	0,55	0,57
P.1.3	90	80	80	0,41	0,46	0,50	0,53	0,54
P.1.4	85	75	75	0,39	0,44	0,48	0,50	0,51
P.1.5	80	75	75	0,37	0,42	0,45	0,47	0,49
P.2.1	100	85	85	0,54	0,60	0,65	0,69	0,71
P.2.2	90	75	75	0,49	0,55	0,59	0,62	0,64
P.2.3	80	70	70	0,44	0,49	0,53	0,56	0,58
P.2.4	65	55	55	0,39	0,43	0,47	0,49	0,51
P.3.1	70	60	60	0,44	0,49	0,53	0,56	0,58
P.3.2	55	50	50	0,36	0,40	0,43	0,46	0,47
P.3.3	55	40	45	0,28	0,31	0,33	0,35	0,36
P.4.1	55	40	45	0,29	0,32	0,35	0,37	0,38
P.4.2	55	40	45	0,29	0,32	0,35	0,37	0,38
M.1.1								
M.2.1								
M.3.1								
K.1.1	110	75	75	0,68	0,77	0,83	0,88	0,90
K.1.2	90	70	70	0,54	0,61	0,66	0,69	0,71
K.2.1	145	90	110	0,63	0,71	0,77	0,81	0,83
K.2.2	90	70	70	0,54	0,61	0,66	0,69	0,71
K.3.1	80	70	70	0,58	0,65	0,71	0,75	0,77
K.3.2	70	65	65	0,46	0,52	0,56	0,59	0,61
N.1.1								
N.1.2								
N.2.1								
N.2.2								
N.2.3								
N.3.1								
N.3.2								
N.3.3								
N.4.1								
S.1.1								
S.1.2								
S.2.1								
S.2.2								
S.2.3								
S.3.1								
S.3.2								
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1								
O.1.2								
O.2.1								
O.2.2								
O.3.1								

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Cutting data standard values – WPC – Change

Index	11 910 ...				
	UNI				
		Ø 14–16	> Ø 16–20	> Ø 20–25	> Ø 25–30
	v_c (m/min)	f (mm/rev)			
P.1.1	100	0,22	0,25	0,28	0,32
P.1.2	100	0,27	0,31	0,35	0,39
P.1.3	100	0,27	0,31	0,35	0,39
P.1.4	90	0,25	0,28	0,32	0,35
P.1.5	90	0,25	0,28	0,32	0,35
P.2.1	100	0,25	0,28	0,32	0,35
P.2.2	100	0,25	0,28	0,32	0,35
P.2.3	100	0,25	0,28	0,32	0,35
P.2.4	80	0,21	0,24	0,27	0,30
P.3.1	70	0,20	0,22	0,25	0,28
P.3.2	70	0,18	0,21	0,24	0,26
P.3.3	60	0,17	0,19	0,22	0,24
P.4.1	55	0,17	0,19	0,22	0,24
P.4.2	55	0,17	0,19	0,22	0,24
M.1.1					
M.2.1					
M.3.1					
K.1.1	110	0,37	0,42	0,47	0,53
K.1.2	100	0,31	0,35	0,39	0,44
K.2.1	100	0,37	0,42	0,47	0,53
K.2.2	90	0,31	0,35	0,39	0,44
K.3.1	100	0,37	0,42	0,47	0,53
K.3.2	90	0,31	0,35	0,39	0,44
N.1.1					
N.1.2					
N.2.1					
N.2.2					
N.2.3					
N.3.1					
N.3.2					
N.3.3					
N.4.1					
S.1.1					
S.1.2					
S.2.1					
S.2.2					
S.2.3					
S.3.1					
S.3.2					
S.3.3					
H.1.1					
H.1.2					
H.1.3					
H.1.4					
H.2.1					
H.3.1					
O.1.1					
O.1.2					
O.2.1					
O.2.2					
O.3.1					

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Type overview – WTX High performance drilling tools

- ▲ good self-centring
- ▲ optimum swarf control
- ▲ precise radial run-out
- ▲ excellent alignment precision
- ▲ high-quality surface finish
- ▲ close drilling tolerances
- ▲ limited hardening of peripheral zones of the material
- ▲ good chip evacuation even with large drilling depths

For all products that are marked with the video icon, a relevant product video can be viewed at **cutting.tools/ie/en/type-overview-wtx**

UNI		▲ high-performance solid carbide drill for universal application, for all materials up to 1200 N/mm²	DRAGONSKIN	▶
Feed UNI		▲ solid carbide high feed drills with 3 cutting edges ▲ very good positional accuracy	DRAGONSKIN	▶
Speed UNI		▲ for double the cutting speed ▲ asymetric point geometry permits performance improvement when drilling steel and cast iron by up to 60 %	DRAGONSKIN	▶
Quattro 4F		▲ with additional guide land for best alignment accuracy, concentricity and positional accuracy	DRAGONSKIN	
180		▲ for inclined surfaces up to 45° and flat bottom holes		
TB		▲ solid carbide deep hole drill, up to 50xD without peck drilling ▲ 4 or 6 facet head geometry for excellent alignment accuracy		
CP		▲ Ensures an even safer deep hole drilling process ▲ For optimal guidance of the deep hole twist drill for hole depths > 30xD		
VA		▲ first choice for corrosion and acid resistant seels ▲ for volume production		
Speed VA		▲ Designed for high cutting speeds in corrosion and acid-resistant steels		
AL		▲ solid carbide high performance drill specailly for the machining of aluminium, copper and brass ▲ 6 facet geometry for excellent hole quality	DRAGONSKIN	
Ti		▲ Specialist for the cost-effective machining of titanium, titanium alloys and heat-resistant alloys ▲ Also suitable for machining corrosion-resistant and acid-resistant steels	DRAGONSKIN	
H		▲ high-performance drill for hardened steels from 45 to 70 HRC	DRAGONSKIN	▶
HFDS		▲ Four fluted high-feed drill ▲ Specially designed for steel processing ▲ Innovative cutting edge geometry guarantees high positioning accuracy	DRAGONSKIN	▶
MINI		▲ solid carbide micro drill for the precise manufacture of very small holes from Ø 0.1 to 2.9 mm		
MICRO		▲ Universal high-performance micro drill ▲ Specialised geometry and coating ▲ Pilot drill for WTX Micro deep hole twist drill	DRAGONSKIN	▶
Change		▲ replaceable head drills with the performance level of a solid carbide drill, from Ø 12.0 mm to 41.0 mm		▶
Change Feed		▲ exchangeable head drill with three cutting edges for even greater performance, from Ø 14.0 mm to 32.0 mm		▶
Feed BR		▲ Solid carbide high-performance drill reamer ▲ Drilling and reaming in one operation ▲ Three drilling edges and six reaming edges	DRAGONSKIN	
SB		▲ Solid carbide short step drill for steels and cast iron materials ▲ For core hole plus countersink for thread cutting and forming	DRAGONSKIN	

2

Important application criteria for WTX drills

Offset
The axial run-out of the axis between a rotating work piece and a stationary tool must not exceed 0.04 mm. A larger run-out reduces tool life and drilling quality and can lead to tool breakage.

Run-out
The concentricity error when the tool is rotating should not exceed 0.015 mm.

Cooling lubricant
With internally cooled tools the coolant pressure should be min. 20 bar.
High-quality semi-synthetic or emulsion coolants with min. 10 % oil content and EP additives are recommended. This allows better life, and achieves higher tolerance accuracy and better surface quality. A fine filter system is recommended to prevent possible clogging of the coolant channels.

Drilling into full material
Due to the geometric design of the solid carbide drills, they are suitable for drilling into solid material.
With solid carbide drills ≤ 12xD drilling can be carried out in solid material without the need for centering and spot drilling operations.

Flute run-out
When using WTX drills a safety margin of at least 1 to 1.5 x D must be maintained between the work piece and the flute outlet groove of the drill to ensure optimum chip evacuation and prevent chip clogging and tool fracture.

Peck drilling
Pecking should be avoided as there is a very high risk of fracture caused by chips left behind or flushed into the hole.

Secondary tools
If a smaller diameter WTX drill is used as a following tool in the same hole, it should have a smaller drill point angle to ensure that it centres properly.

Interrupted cut
Reduce the feedrate on entry to and from cross holes

Drill exit
To avoid severe burr formation, reduce v_c and f.

Workpiece clamping
To avoid tool breakages, care must be taken to ensure a proper workpiece clamping without vibration or workpiece deflection.

Tool Clamping
With optimum clamping high alignment accuracy and tolerances (IT7-8) are possible.
Due to the high surface quality reaming operations can often be dispensed with.

Machine Requirements
Please note the performance diagram

Cutting data table
To control the chip length (comma chip) the feed rates should be no lower than the lower limits quoted in the cutting data table.

Feed rate f in mm/rev.
Drilling capacity relative to the diameter: v_c = 80 m/min.

Tensile strength of the material = 600 N/mm²

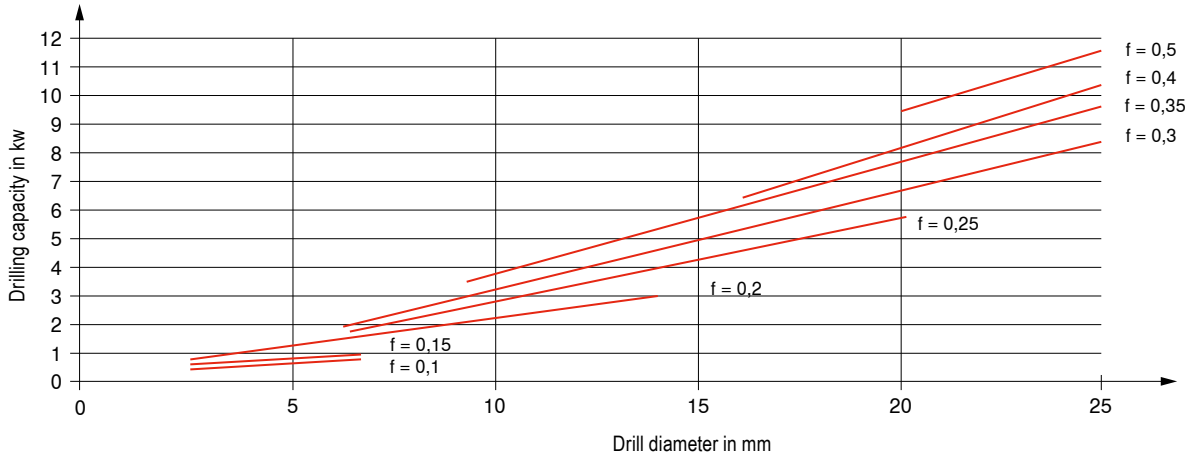

Strategy for the production of deep holes with the WTX solid carbide deep hole drill

1 Producing the pilot hole

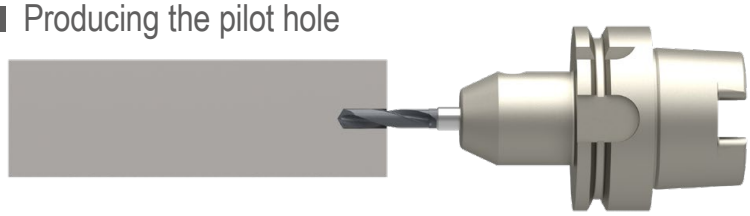

- For the pilot hole, we recommend a WTX drill 3xD / 5xD with the same nominal diameter
- The pilot hole should be 0.01–0.03 mm larger in diameter and at least 3xD deep.
- It is essential to ensure that the point angle of the pilot drill is bigger than the point angle of the deep hole drill.
- From a hole depth of 40xD, we recommend a pilot hole with our Co-Pilot deep hole twist drill CP 20 UNI.

2 Movement of the deep hole drill into the pilot hole

- Move the WTX deep hole drill without coolant pressure and with reduced speed (n = 200–300 1/min) into the pilot hole at a feed of v_f = 1.000 mm/min
- Approx. 2 mm before reaching the bottom of the hole (end of the pilot hole), stop the feed, switch on the coolant and wait for a short time until the recommended pressure is reached. Then increase the spindle speed to the recommended speed as smoothly as possible.

3 Drilling to required depth without pecking

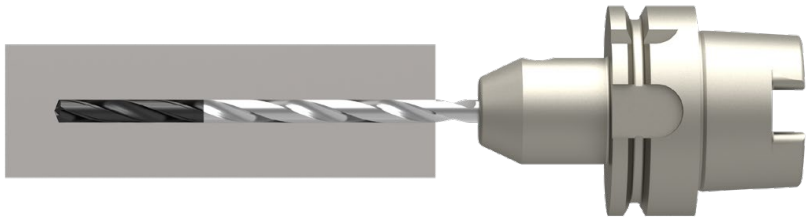

- Reduce feed rate for cross holes and at drill exit by 50%

4 Retracting the drill

- Retract the drill to approximately the depth of the pilot hole.
- Reduce the rpm to a low speed (n = 200–300 1/min).
- Use normal rapid feed (V_f = 3.000 mm/min) when exiting the hole.

For horizontal deep drilling operations from 40xD, move the deep hole drill into the hole counter-clockwise at 200 1/min. This prevents sagging of the deep hole drill.

It is essential to ensure that deep hole drills **never** run unsupported at full speed in the machine !

WTX – Micro – recommended application

General references

- During vertical machining, a pilot hole is not required for regular and straight surfaces from Ø 1.0 mm up to a length of 12xD due to the excellent self-centring. During horizontal drilling, a pilot drill must be used for irregular and angled surfaces.
  The WTX Micro 5xD is recommended as a pilot drill.
- To guarantee problem-free insertion of the deep hole twist drill in the pilot hole, during horizontal machining 90° countersinking with suitable NC countersink is recommended.
- During vertical machining, drills from Ø 1.0 mm up to a length of 12xD can also be operated outside the pilot hole without a reduction in speed.
- For through holes, the feed per revolution must be reduced by 50% before exiting the hole.
- For long-chipping materials, pecking may be required every 3xD from a hole depth of 10xD. Peck drilling (retraction) should occur at the pilot hole depth.
- Due to the small thro' coolant Ø during micro drilling, effective filtration of the cooling medium is of the utmost importance.
  Drill < Ø 2.0 mm Filter ≤ 0.010 mm
  Drill < Ø 3.0 mm Filter ≤ 0.020 mm
- The longer the coolant is in the machine, suspended particles and particulate matter in the cooling medium prevent effective coolant flow. Regular replacement of the coolant is therefore recommended.
- A suitable clamping device with maximum radial run-out accuracy and balance quality is required for process-secure production.
  Radial run-out accuracy ≤ 0.003 mm
  Suitable for high-speed areas
- To guarantee a process-secure drilling process, a minimum pressure of 30 bar must be present.

1 Producing the pilot hole



- Pilot hole depth: min. 3xD
- It must be ensured that the prepared pilot hole is free from chips to avoid blocking of the micro deep hole twist drill cutting edges

2 Entering the pilot hole with a deep hole twist drill

- Speed 300 1/min (reverse rotation sometimes possible)
- Entry speed approx. 1.000 mm/min
- Switch on cooling
- Increase parameters 0.5–1.0 mm before reaching the bottom of the pilot hole

3 Deep hole drilling

- At hole depth without pecking

4 Retracting the drill

- Retract drill approx. 1xD
- Reduce speed to 300 1/min
- Exit speed approx. 1.000 mm/min
- Switch off emulsion before exiting the hole

Tolerances and angles

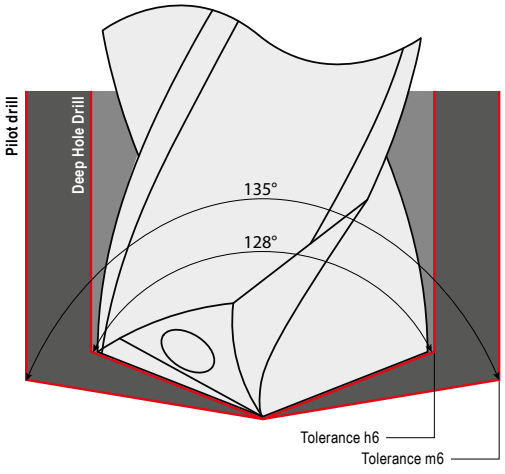

The following must apply to use the pilot and deep hole twist drill consecutively and without collisions:
$\Delta D = ØD$ (pilot hole) – $ØD$ (deep hole) > 0

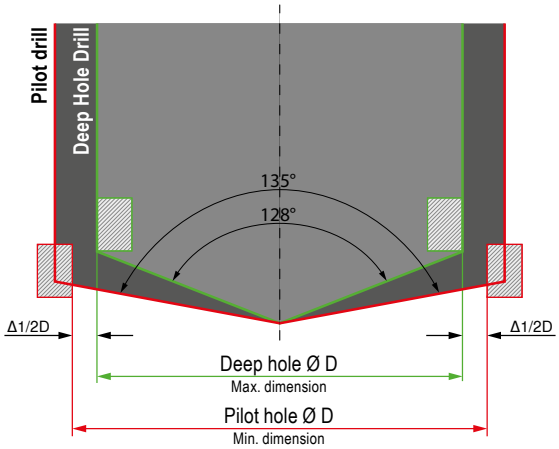

Application notes for WTX – Change Feed and WTX – Change exchangeable head drills

Coolant conditions

Coolant pressure dependent on drilling depth:

with thro' coolant		with external cooling		without coolant supply
				
1xD: 8 bar	✓	1xD: 8 bar	✓	
3xD: 8 bar	✓	3xD: 8 bar	✓	
5xD: 12 bar	✓	5xD: 12 bar	✗	max. bore depth: 3xD
8xD: 25 bar	✓	8xD: 25 bar	✗	
12xD: 25 bar	✓	12xD: 25 bar	✗	

Runout accuracy



max. 0,02 mm



max. 0,04 mm

Max. entry and exit angle for the WTX – Change Feed





When entering and exiting angled surfaces, reduce v_f by 50 %.

Max. entry and exit angle for the WTX – Change





When entering and exiting angled surfaces, reduce v_f by 50 %.

Exiting a through hole

▲ WTX – Change Feed and WTX – Change

For through holes, it must be ensured that the exchangeable head does not fully protrude from the hole.

Do not retract at rapid feedrate

For withdrawal, a rate of 5 times the value of the feed rate is recommended.

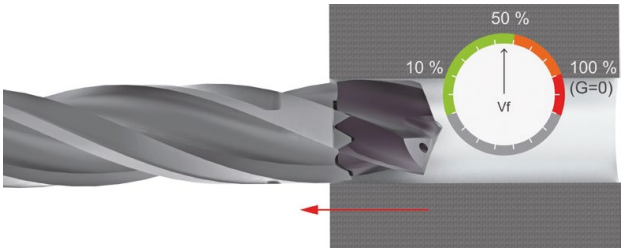

Machining situations



Offset cross hole point is engaged

WTX – Change Feed ✓
WTX – Change ✓



Offset cross hole point is not engaged

WTX – Change Feed ✗
WTX – Change ✗



Breakthrough at counterbore

WTX – Change Feed ✓
WTX – Change ✗



Hole on centre and smaller Ø

WTX – Change Feed ✓
WTX – Change ✓



Hole on centre and same Ø

WTX – Change Feed ✗
WTX – Change ✗



Hole on centre and larger Ø

WTX – Change Feed ✗
WTX – Change ✗

Application notes for WPC – Change indexable insert drill

Assembly of the indexable insert



Loosen the clamping screw anti-clockwise using a TORX PLUS® screwdriver (screwdriver not included in the scope of supply).



Remove the indexable insert from the insert seat.



Clean the insert seat and screw thread with compressed air.



Insert the new indexable insert in the insert seat.



Insert clamping screw from correct side and tighten clockwise with the specified torque.
Observe the change interval of the clamping screw!

Notes

- ▲ Only insert indexable inserts in the diameter range designated for the respective holder.
- ▲ The clamping screw must also be replaced upon every fifth replacement of the indexable insert.
- ▲ The tightening torque and item number of the clamping screw are labelled on the holder.
- ▲ Use only original spare parts.

Clamping screws and tightening torques

Diameter range	Article no. Clamping screw	Drive	Torque moment TQ
14,00–15,99 mm	11 950 00100	08IP	0,9 Nm
16,00–17,99 mm	11 950 00200	08IP	1,2 Nm
18,00–21,99 mm	11 950 00300	10IP	2,2 Nm
22,00–23,99 mm	11 950 00400	10IP	3,2 Nm
24,00–25,99 mm	11 950 00500	15IP	5,0 Nm
26,00–30,00 mm	11 950 00600	20IP	6,0 Nm

Notes on drilling technology

Solid drilling

Stack plate drilling: stable clamping of closely spaced stack plates required.

When drilling into angled surfaces < 3°, reduce the feed by approx. 50%.
For an angled drill entrance > 3°, prior spot facing is required.

When exiting at an angle < 3°, reduce the feed by approx. 50%.
Machining angled drill exits > 3° is not recommended.



When machining with a stationary tool (turning machines), a precise centre position of the tool in relation to the rotational axis of the workpiece must be ensured. Maximum permissible offset ± 0.02 mm.

To achieve the optimal results, it is recommended to use the tool with thro' coolant only.
The recommended minimum coolant pressure should be 12 bar.

Recommendations for solid carbide drilling operations

Reasons for ...	Solutions ...
... Built-up edge	
v_c too low	Increase v_c
Too much material taken off at main cutting edge	Reduce cut
Uncoated cutting edge	Coating
... Corners broken off	
Unstable conditions	Change clamping
Run out too high	Optimise runout
Interrupted cut	Reduce feed
... Heavy flank wear	
v_c too low	Reduce v_c
Feed rate too low	Increase feed rate
Clearance angle too small	Increase clearance angle
... Scoring on the tool flanks	
Unstable conditions	Change clamping
Run out too high	Correct runout
Interrupted cut	Reduce feed
Abrasive materials	Thicker emulsion or oil
... Round chamfer wear	
Unstable conditions	More stable clamping
Run out too high	Check radial run-out
Back taper too small	Increase back taper
Wrong emulsion or too thin emulsion	Thicker emulsion or oil
... Material broken off at main cutting edge	
Unstable conditions	More stable clamping
Interrupted cut	Reduce feed
Wrong type of tool	Optimise tool
Max. tool life has been exceeded	Change tool earlier
... Heavy wear at chisel edge	
v_c too low	Increase v_c
Feed rate too high	Reduce feed
Too much material taken off at main cutting edge	Optimise cutting edge
... Material broken off at intersections, drill point and main cutting edge	
Clearance angle too small	Increase clearance angle
Too much material taken off at main cutting edge	Optimize cutting edge
Wrong tool	Other tool
... Plastic deformation of cutting corner	
v_c too high	Reduce v_c
Insufficient emulsion	Increase amount of coolant
Wrong or no corner chamfer	Correct corner chamfer
... Poor surface quality	
Excessive runout error	Check radial run-out
Cooling too low	More emulsion
Unstable conditions	Change toolholding
... Heavy burring on hole exit	
Feed too high	Reduce feed
Excessive honing of main cutting edge	Minimise cutting edge

Further information
cutting.tools/ie/en/tips-solid-carbide-drilling

Coatings

Ti800
- AlTiN nanolayer coating
- Maximum application temperature: 1100 °C

Ti700
- TiAlN multilayer coating
- Maximum application temperature: 1100 °C

TiAlN
- TiAlN multilayer coating
- Maximum application temperature: 900 °C

TiB
- TiB monolayer coating
- Specially for aluminium machining
- Maximum application temperature: 900 °C

TiSi
- TiSi multilayer coating
- Maximum application temperature: 800 °C

Ti1050
- Ti multilayer coating
- $HV_{0.005}$ = 3300
- Coefficient of friction (against steel) = 0.3 – 0.5
- Maximum application temperature: 900 °C

Ti750
- TiAlN nanolayer coating
- Maximum application temperature: 1000 °C

TPX74S
- TiAlN-based PVD multilayer coating
- Universally applicable grade with high wear-resistance
- Maximum application temperature: 900 °C

DPX74S DRAGONSKIN
- Special TiAlN nanolayer coating
- Maximum application temperature: 1000 °C

DPA54 DRAGONSKIN
- Special multilayer coating
- High hardness and heat resistance
- Maximum application temperature: 800 °C

DLC DRAGONSKIN
- Diamond-like carbon coating
- Specially for machining non-ferrous metals
- Maximum application temperature: 400 °C

DPX14S DRAGONSKIN
- TiAlN nanolayer coating
- Coefficient of friction (dry, against steel) = 0.35
- Maximum application temperature: 1000 °C

DPX64U DRAGONSKIN
- Special TiAlN monolayer coating
- Perfected for hardened materials
- Optimised coating and surface structure
- Maximum application temperature: 800 °C

DPX74M DRAGONSKIN
- Universal AlCrN-based monolayer coating developed for micro tools
- High oxidation, heat and wear resistance
- Maximum application temperature 1100 °C

New products for machining technicians

NEW SOGX indexable inserts

BK8430 -21

- Highly positive and soft-cutting topography
- Universal applicable and high wear-resistance grade
- Can be used for centre and periphery

BK7935 -21

- Highly positive and soft-cutting topography
- Tougher grade, particularly suitable for machining stainless and acid-resistant steels as well as special alloys
- Recommended only for the peripheral insert

→ Page 30

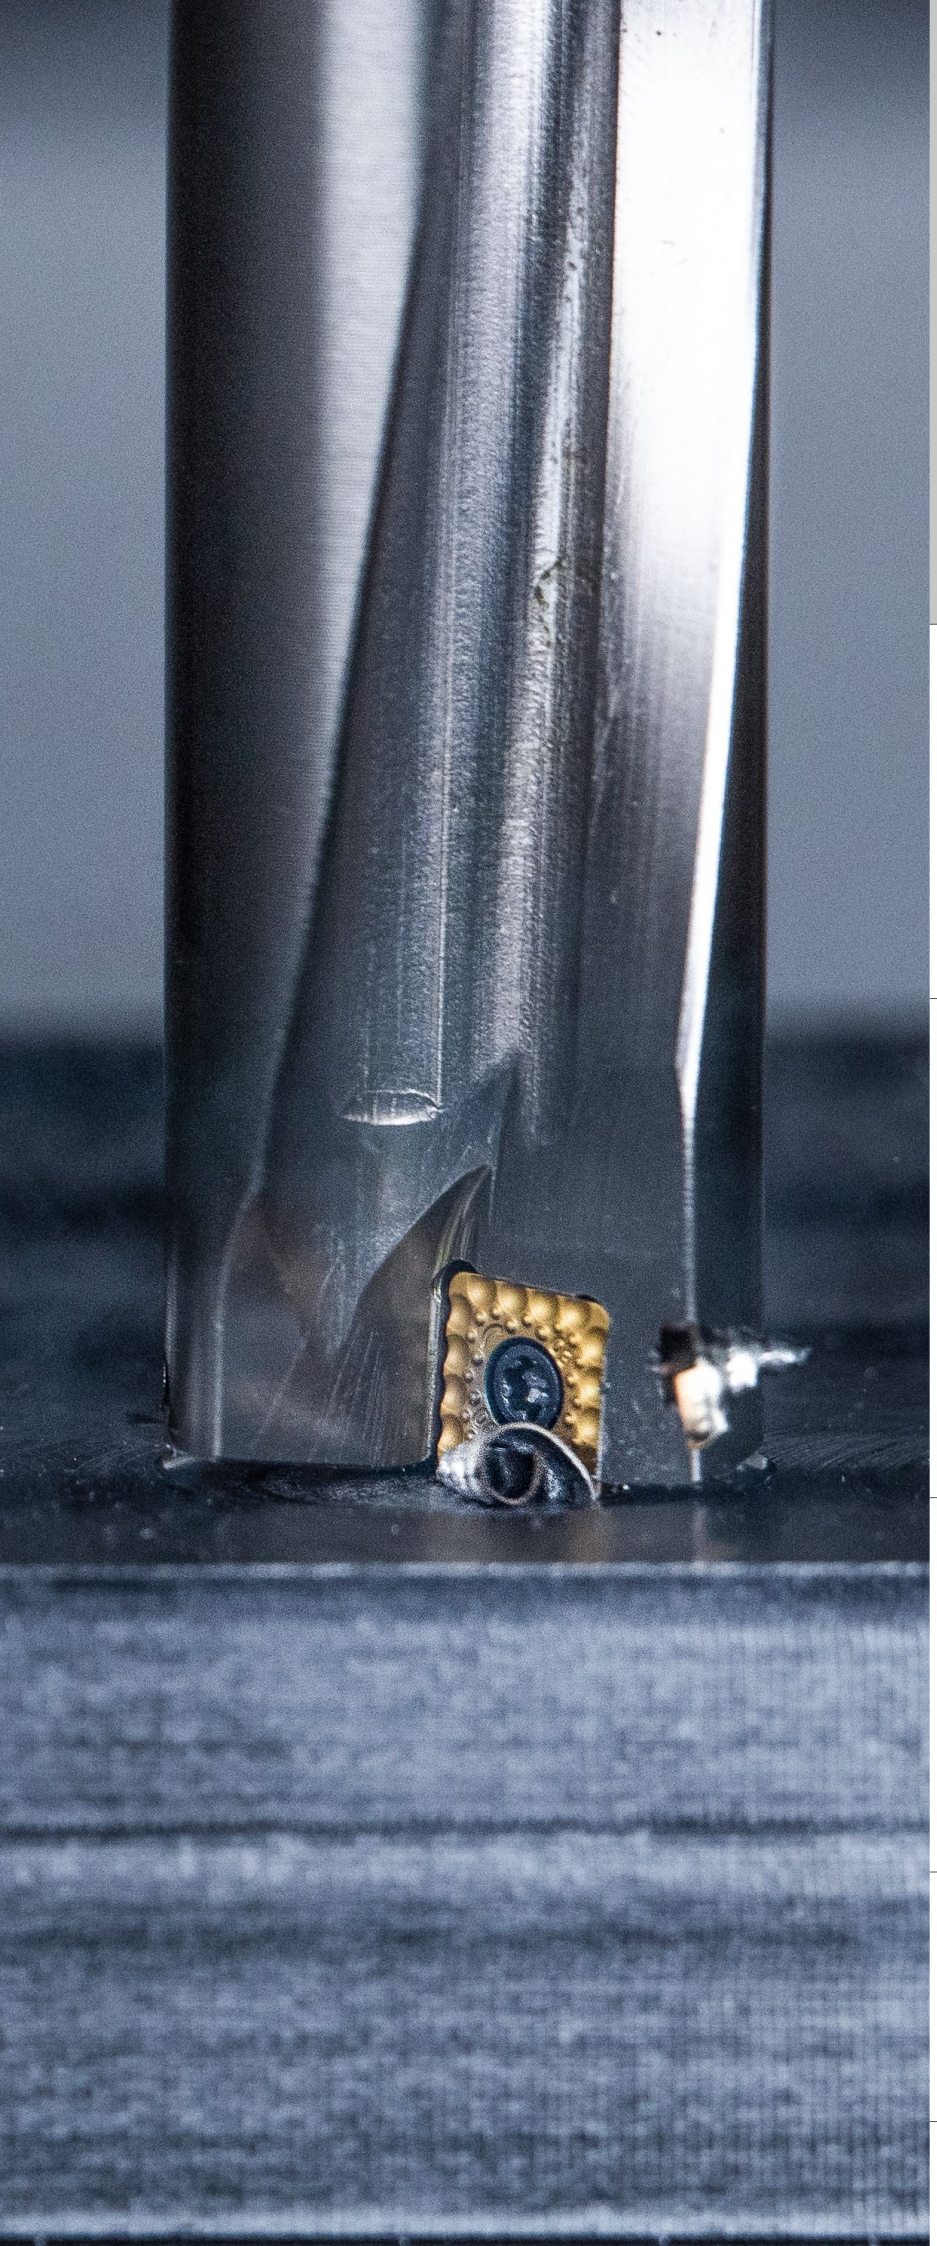

Solid drilling and bore machining

1 HSS drilling
2 Solid carbide drilling
3 Indexable insert drilling 3
4 Reaming and Countersinking
5 Spindle Tooling

Threading

6 Taps and thread formers
7 Circular and Thread Milling
8 Thread turning

Turning

9 Turning Tools
10 Multifunctional Tools – EcoCut and FreeTurn
11 Grooving Tools
12 Miniature turning tools

Milling

13 HSS Milling Cutters
14 Solid Carbide milling cutters
15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories
17 Workpiece clamping

18 Material examples and article no. Index

List of contents

Symbol explanation	4
Application tips – eccentric sleeves	5
Toolfinder	6+7
Product programme	8–60
Technical Information	
Cutting Data	61–77
Maximum Offset Range	78–80
Coding example, coolant supply	81
Indexable insert drilling – problems / possible causes / solutions	82
KUB Centron – drilling instructions + problems / possible causes / solutions	83+84
Overview of grades and chip breakers, application	85–87

KOMET \ Performance

Premium quality tools for high performance.

The premium quality tools from the **KOMET Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

KOMET \ Standard

Quality tools for standard applications.

The quality tools of the **KOMET Standard** product line are high quality, high performance, reliable and enjoy the highest level of trust among our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Shank

C
Cylindrical shank with clamping flat
Guarantees optimum clamping of the tool and can be clamped in every standard adapter.

K
Drill with combi shank
This drill shank has two clamping flats (DIN 6535HE, DIN 6595) that guarantee pull-out protection and good face contact of the drill. Both Weldon and Whistle Notch adapters can be used.

ABS
Drill with ABS connection.
The ABS connection by Komet is a modular coupling system for rotating tools and stationary tools, and offers a number of advantages, such as improved force transmission.
Technical information and spare parts
→ Chapter 16 Adapters and accessories, page 314.

PSC
Drill with polygonal shank
The polygonal shank offers the best rigidity during the transmission of force from the drill to the adapter. The tapered polygonal shape easily absorbs torsional forces and bending forces.

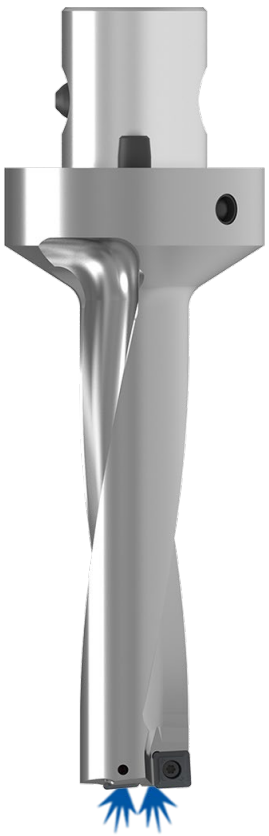

Version

Drill with thro' coolant supply
The tried-and-tested thro' coolant system guarantees a reduction in heat at the cutting edges of the tool as well as improved chip removal.

left-hand cutting

● = **Main Application**
○ = Extended application

Application tips – eccentric sleeves

Using eccentric sleeves, the diameter of the hole can be varied and adjusted by +/- 0.3 mm with ease.

Two types of eccentric sleeve are available:
One for use with the indexable insert drill adapter and one for use with a Weldon adapter.
The difference lies solely in the design and position of the slots for the adapter's clamping screws.
There are four sizes per type, which are tailored to the shank diameter.

Eccentric sleeve for indexable insert drill adapter

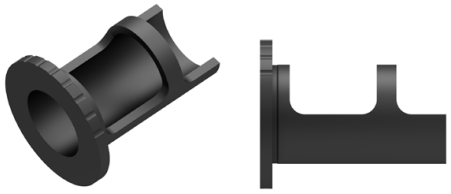

Eccentric sleeve for Weldon adapter

Designation		Page No.
Eccentric sleeves for indexable insert drill adapters		58+59
Eccentric sleeves for Weldon adapters		58+59

Designation		Page No.
Adjuster with ABS connection		60

Adapters can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

Designation	
Adapters with ABS connection	
Indexable insert drill adapter	

→ **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

Toolfinder

KUB Pentron
KOMET \ Performance

- ▲ High-performance indexable insert drill for process-secure drilling under a wide range of conditions
- ▲ Ideal for extreme machining situations

Boring depth	Solid drilling	Boring	Drilling through a transverse hole	Stack plate drilling	Spot drilling uneven surfaces	Spot drilling an edge	Spot drilling convex surfaces	Angled hole entrance	Spot drilling pointed contours	Chain drilling	Drilling through a centre or pre-op
2xD	●	○	●	●	●	●	●	●	●	●	●
3xD	●	○	●	●	●	●	●	●	●	●	●
4xD	●	-	●	●	○	●	●	●	●	○	●
5xD	●	-	●	○	○	●	○	●	○	-	○

KUB Pentron CS
KOMET \ Performance

- ▲ Process-secure, reliable, modular system for creating large holes with a diameter of up to 96.00 mm

Boring depth	Solid drilling	Boring	Drilling through a transverse hole	Stack plate drilling	Spot drilling uneven surfaces	Spot drilling an edge	Spot drilling convex surfaces	Angled hole entrance	Spot drilling pointed contours	Chain drilling	Drilling through a centre or pre-op
3xD	●	-	●	○	●	●	●	●	●	●	●

KUB Trigon
KOMET \ Performance



- ▲ Ideal for machining under unstable conditions
- ▲ Well-suited to machining on less powerful machines
- ▲ The first choice for creating dimensionally accurate holes

Boring depth	Solid drilling	Boring	Drilling through a transverse hole	Stack plate drilling	Spot drilling uneven surfaces	Spot drilling an edge	Spot drilling convex surfaces	Angled hole entrance	Spot drilling pointed contours	Chain drilling	Drilling through a centre or pre-op
2xD	●	●	●	-	●	○	●	●	○	●	○
3xD	●	●	●	-	●	○	●	●	○	●	○
4xD	●	-	○	-	○	-	○	○	-	○	○

KUB Centron
KOMET \ Performance

- ▲ Cost-effective and process-secure drilling
- ▲ Hole depths up to 9xD in virtually all materials
- ▲ HSS or solid carbide centring tip for optimum positioning accuracy

Boring depth	Solid drilling	Boring	Drilling through a transverse hole	Stack plate drilling	Spot drilling uneven surfaces	Spot drilling an edge	Spot drilling convex surfaces	Angled hole entrance	Spot drilling pointed contours	Chain drilling	Drilling through a centre or pre-op
4xD	●	-	○	-	●	-	○	-	-	○	●
6xD	●	-	○	-	●	-	○	-	-	○	●
9xD	●	-	○	-	●	-	○	-	-	○	●

MaxiDrill 900
KOMET \ Standard

- ▲ Provides perfect drilling quality even under enormous loads
- ▲ Ideal for large drilling depths: The high feed rates increase productivity
- ▲ For stable machining situations

Boring depth	Solid drilling	Boring	Drilling through a transverse hole	Stack plate drilling	Spot drilling uneven surfaces	Spot drilling an edge	Spot drilling convex surfaces	Angled hole entrance	Spot drilling pointed contours	Chain drilling	Drilling through a centre or pre-op
2xD 3xD	●	○	●	●	●	●	●	●	●	○	●
4xD 5xD	●	○	●	○	○	●	●	●	●	○	●

Shank	Diameter in mm Ø DC	Direction of cut	Tool holder Page No.	Insert type	Cutting edges per insert	Steel P / Stainless steel M / Cast iron K / Non-ferrous metals N / Heat-resistant S / Tempered steel H / Non-metal materials O	Inserts Page No.
ABS	**14–65**	**R**	8+9	SOGX	4	● ● ● ● ● ○ ○ → v_c Page 62–67	29+30
C	**14–46**	**R**	18+19				
ABS	**14–65**	**R**	10+11				
PSC	**14–37**	**R**	16+17				
C	**14–46**	**R**	20+21				
ABS	**14–46**	**R**	12+13				
C	**14–46**	**R**	22+23				
ABS	**14–46**	**R**	14+15				
C	**14–46**	**R**	24+25				
ABS	**64–96**	**R**	26–28	SOGX	4	● ● ● ● ● ○ ○ → v_c Page 62–67	29+30
ABS	**14–82**	**R**	31–33	WOEX	3	● ● ● ● ● ○ ○ → v_c Page 68–71	48–49
ABS	**14–44**	**L**	34				
K	**14–44**	**R**	40				
ABS	**14–82**	**R**	35–37				
ABS	**14–44**	**L**	38				
K	**14–44**	**R**	41				
ABS	**14–44**	**R**	39				
K	**14–35**	**R**	42				
ABS	**20–81**	**R**		WOEX	3	● ● ● ● ● ○ ○	48–49
				KUB Centron – centring tips	Ø		
ABS	**20–81**	**R**	43		5–12 mm	● ● ● ● ● ○ → v_c Page 72+73	47
				KUB Centron – drill bits	Ø		
ABS	**20–81**	**R**			20–81 mm		44–47
C	**12–63**	**R**	50+51	SONT	2 / 4	● ● ● ○ ○ → v_c Page 74–77	57
C	**12–63**	**R**	52+53				
C	**12–54**	**R**	54–55				
C	**12–41**	**R**	56				

Further information on grades and chip breakers can be found on → **page 85 + 86**.

KUB Pentron – Indexable insert drill

▲ ZEFF = Number of Inserts

Scope of supply:

Indexable Insert Drill incl. clamping screws

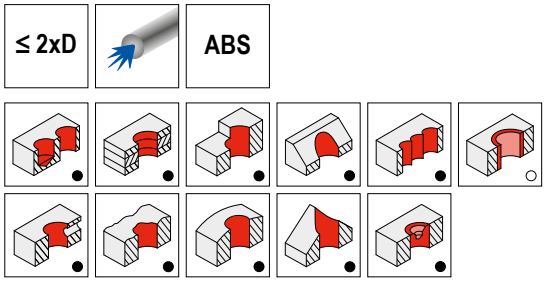

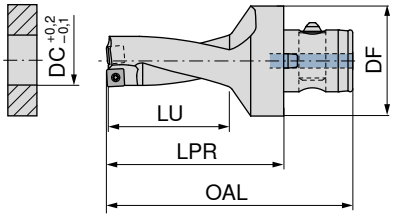

Designation	KOMET no.	DC	DF	OAL	LU	LPR	torque moment	ZEFF	Insert	10 872 ... EUR 2B/6#	
		mm	mm	mm	mm	mm	Nm				
KUB-P.2D.140.R.04-ABS50	U42 51400	14	50	86	28	55	0,38	2	SOGX 040204	459,10	14095
KUB-P.2D.145.R.04-ABS50	U42 51450	14,5	50	89	30	58	0,38	2	SOGX 040204	459,10	14595
KUB-P.2D.150.R.04-ABS50	U42 51500	15	50	89	30	58	0,38	2	SOGX 040204	459,10	15095
KUB-P.2D.155.R.04-ABS50	U42 51550	15,5	50	93	32	62	0,38	2	SOGX 040204	459,10	15595
KUB-P.2D.160.R.04-ABS50	U42 51600	16	50	93	32	62	0,38	2	SOGX 040204	459,10	16095
KUB-P.2D.165.R.05-ABS50	U42 51650	16,5	50	96	34	65	0,62	2	SOGX 050204	467,90	16595
KUB-P.2D.170.R.05-ABS50	U42 51700	17	50	96	34	65	0,62	2	SOGX 050204	467,90	17095
KUB-P.2D.175.R.05-ABS50	U42 51750	17,5	50	98	36	67	0,62	2	SOGX 050204	467,90	17595
KUB-P.2D.180.R.05-ABS50	U42 51800	18	50	98	36	67	0,62	2	SOGX 050204	467,90	18095
KUB-P.2D.185.R.06-ABS50	U42 51850	18,5	50	101	38	70	1,01	2	SOGX 060206	481,80	18595
KUB-P.2D.190.R.06-ABS50	U42 51900	19	50	101	38	70	1,01	2	SOGX 060206	481,80	19095
KUB-P.2D.195.R.06-ABS50	U42 51950	19,5	50	103	40	72	1,01	2	SOGX 060206	481,80	19595
KUB-P.2D.200.R.06-ABS50	U42 52000	20	50	103	40	72	1,01	2	SOGX 060206	481,80	20095
KUB-P.2D.205.R.07-ABS50	U42 52050	20,5	50	105	42	74	1,01	2	SOGX 07T208	498,10	20595
KUB-P.2D.210.R.07-ABS50	U42 52100	21	50	105	42	74	1,01	2	SOGX 07T208	498,10	21095
KUB-P.2D.215.R.07-ABS50	U42 52150	21,5	50	107	44	76	1,01	2	SOGX 07T208	498,10	21595
KUB-P.2D.220.R.07-ABS50	U42 52200	22	50	107	44	76	1,01	2	SOGX 07T208	498,10	22095
KUB-P.2D.225.R.07-ABS50	U42 52250	22,5	50	109	46	78	1,01	2	SOGX 07T208	498,10	22595
KUB-P.2D.230.R.07-ABS50	U42 52300	23	50	109	46	78	1,01	2	SOGX 07T208	498,10	23095
KUB-P.2D.235.R.08-ABS50	U42 52350	23,5	50	111	48	80	1,28	2	SOGX 080308	513,10	23595
KUB-P.2D.240.R.08-ABS50	U42 52400	24	50	111	48	80	1,28	2	SOGX 080308	513,10	24095
KUB-P.2D.245.R.08-ABS50	U42 52450	24,5	50	114	50	83	1,28	2	SOGX 080308	513,10	24595
KUB-P.2D.250.R.08-ABS50	U42 52500	25	50	114	50	83	1,28	2	SOGX 080308	513,10	25095
KUB-P.2D.255.R.08-ABS50	U42 52550	25,5	50	116	52	85	1,28	2	SOGX 080308	513,10	25595
KUB-P.2D.260.R.08-ABS50	U42 52600	26	50	116	52	85	1,28	2	SOGX 080308	513,10	26095
KUB-P.2D.265.R.09-ABS50	U42 52650	26,5	50	119	54	88	2,25	2	SOGX 09T308	569,70	26595
KUB-P.2D.270.R.09-ABS50	U42 52700	27	50	119	54	88	2,25	2	SOGX 09T308	569,70	27095
KUB-P.2D.275.R.09-ABS50	U42 52750	27,5	50	121	56	90	2,25	2	SOGX 09T308	569,70	27595
KUB-P.2D.280.R.09-ABS50	U42 52800	28	50	121	56	90	2,25	2	SOGX 09T308	569,70	28095
KUB-P.2D.285.R.09-ABS50	U42 52850	28,5	50	124	58	93	2,25	2	SOGX 09T308	569,70	28595
KUB-P.2D.290.R.09-ABS50	U42 52900	29	50	124	58	93	2,25	2	SOGX 09T308	569,70	29095
KUB-P.2D.295.R.09-ABS50	U42 52950	29,5	50	126	60	95	2,25	2	SOGX 09T308	569,70	29595
KUB-P.2D.300.R.09-ABS50	U42 53000	30	50	126	60	95	2,25	2	SOGX 09T308	569,70	30095
KUB-P.2D.305.R.10-ABS63	U42 63050	30,5	63	139	62	101	2,8	2	SOGX 100408	600,00	30596
KUB-P.2D.310.R.10-ABS63	U42 63100	31	63	139	62	101	2,8	2	SOGX 100408	600,00	31096
KUB-P.2D.315.R.10-ABS63	U42 63150	31,5	63	141	64	103	2,8	2	SOGX 100408	600,00	31596
KUB-P.2D.320.R.10-ABS63	U42 63200	32	63	141	64	103	2,8	2	SOGX 100408	600,00	32096
KUB-P.2D.325.R.10-ABS63	U42 63250	32,5	63	144	66	106	2,8	2	SOGX 100408	600,00	32596
KUB-P.2D.330.R.10-ABS63	U42 63300	33	63	144	66	106	2,8	2	SOGX 100408	600,00	33096
KUB-P.2D.335.R.11-ABS63	U42 63350	33,5	63	146	68	108	2,8	2	SOGX 110408	640,30	33596
KUB-P.2D.340.R.11-ABS63	U42 63400	34	63	146	68	108	2,8	2	SOGX 110408	640,30	34096
KUB-P.2D.345.R.11-ABS63	U42 63450	34,5	63	149	70	111	2,8	2	SOGX 110408	640,30	34596
KUB-P.2D.350.R.11-ABS63	U42 63500	35	63	149	70	111	2,8	2	SOGX 110408	640,30	35096
KUB-P.2D.355.R.11-ABS63	U42 63550	35,5	63	152	72	113	2,8	2	SOGX 110408	640,30	35596
KUB-P.2D.360.R.11-ABS63	U42 63600	36	63	152	72	113	2,8	2	SOGX 110408	640,30	36096
KUB-P.2D.365.R.11-ABS63	U42 63650	36,5	63	154	74	116	2,8	2	SOGX 110408	640,30	36596
KUB-P.2D.370.R.11-ABS63	U42 63700	37	63	154	74	116	2,8	2	SOGX 110408	640,30	37096
KUB-P.2D.375.R.12-ABS63	U42 63750	37,5	63	156	76	118	6,25	2	SOGX 120408	670,30	37596
KUB-P.2D.380.R.12-ABS63	U42 63800	38	63	156	76	118	6,25	2	SOGX 120408	670,30	38096
KUB-P.2D.385.R.12-ABS63	U42 63850	38,5	63	159	78	121	6,25	2	SOGX 120408	670,30	38596
KUB-P.2D.390.R.12-ABS63	U42 63900	39	63	159	78	121	6,25	2	SOGX 120408	670,30	39096
KUB-P.2D.395.R.12-ABS63	U42 63950	39,5	63	161	80	123	6,25	2	SOGX 120408	670,30	39596
KUB-P.2D.400.R.12-ABS63	U42 64000	40	63	161	80	123	6,25	2	SOGX 120408	670,30	40096
KUB-P.2D.405.R.12-ABS63	U42 64050	40,5	63	164	82	126	6,25	2	SOGX 120408	670,30	40596
KUB-P.2D.410.R.12-ABS63	U42 64100	41	63	164	82	126	6,25	2	SOGX 120408	670,30	41096

Continued on next page

KUB Pentron – Indexable insert drill

▲ ZEFF = Number of Inserts

Scope of supply:

Indexable Insert Drill incl. clamping screws

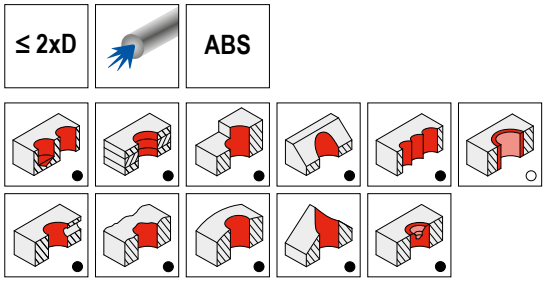

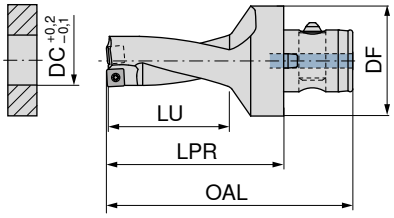

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	ZEFF	Insert	10 872 ... EUR 2B/6#	
KUB-P.2D.415.R.12-ABS63	U42 64150	41,5	63	166	84	128	6,25	2	SOGX 120408	670,30	41596
KUB-P.2D.420.R.12-ABS63	U42 64200	42	63	166	84	128	6,25	2	SOGX 120408	670,30	42096
KUB-P.2D.425.R.13-ABS63	U42 64250	42,5	63	169	86	131	6,25	2	SOGX 130508	670,30	42596
KUB-P.2D.430.R.13-ABS63	U42 64300	43	63	169	86	131	6,25	2	SOGX 130508	670,30	43096
KUB-P.2D.435.R.13-ABS63	U42 64350	43,5	63	171	88	133	6,25	2	SOGX 130508	670,30	43596
KUB-P.2D.440.R.13-ABS63	U42 64400	44	63	171	88	133	6,25	2	SOGX 130508	670,30	44096
KUB-P.2D.445.R.13-ABS63	U42 64450	44,5	63	174	90	136	6,25	2	SOGX 130508	670,30	44596
KUB-P.2D.450.R.13-ABS63	U42 64500	45	63	174	90	136	6,25	2	SOGX 130508	670,30	45096
KUB-P.2D.455.R.13-ABS63	U42 64550	45,5	63	173	92	135	6,25	2	SOGX 130508	670,30	45596
KUB-P.2D.460.R.13-ABS63	U42 64600	46	63	173	92	135	6,25	2	SOGX 130508	670,30	46096
KUB-P.2D.470.R.08-ABS63	U42 64700	47	63	187	94	149	1,28	4	SOGX 080308	716,60	47096
KUB-P.2D.480.R.08-ABS63	U42 64800	48	63	189	96	151	1.28	4	SOGX 080308	716,60	48096
KUB-P.2D.490.R.08-ABS63	U42 64900	49	63	191	98	153	1,28	4	SOGX 080308	716,60	49096
KUB-P.2D.500.R.08-ABS63	U42 65000	50	63	193	100	155	1,28	4	SOGX 080308	716,60	50096
KUB-P.2D.510.R.08-ABS63	U42 65100	51	63	195	102	157	1,28	4	SOGX 080308	716,60	51096
KUB-P.2D.520.R.08-ABS63	U42 65200	52	63	197	104	159	1,28	4	SOGX 080308	716,60	52096
KUB-P.2D.530.R.10-ABS63	U42 65300	53	63	199	106	161	2,8	4	SOGX 100408	716,60	53096
KUB-P.2D.540.R.10-ABS63	U42 65400	54	63	201	108	163	2,8	4	SOGX 100408	716,60	54096
KUB-P.2D.550.R.10-ABS80	U42 75500	55	80	208	110	165	2,8	4	SOGX 100408	865,20	55098
KUB-P.2D.560.R.10-ABS80	U42 75600	56	80	210	112	167	2,8	4	SOGX 100408	865,20	56098
KUB-P.2D.570.R.10-ABS80	U42 75700	57	80	212	114	169	2,8	4	SOGX 100408	865,20	57098
KUB-P.2D.580.R.10-ABS80	U42 75800	58	80	214	116	171	2,8	4	SOGX 100408	865,20	58098
KUB-P.2D.590.R.10-ABS80	U42 75900	59	80	216	118	173	2,8	4	SOGX 100408	865,20	59098
KUB-P.2D.600.R.10-ABS80	U42 76000	60	80	218	120	175	2,8	4	SOGX 100408	865,20	60098
KUB-P.2D.610.R.10-ABS80	U42 76100	61	80	220	122	177	2,8	4	SOGX 100408	865,20	61098
KUB-P.2D.620.R.10-ABS80	U42 76200	62	80	222	124	179	2,8	4	SOGX 100408	865,20	62098
KUB-P.2D.630.R.10-ABS80	U42 76300	63	80	224	126	181	2,8	4	SOGX 100408	865,20	63098
KUB-P.2D.640.R.10-ABS80	U42 76400	64	80	226	128	183	2,8	4	SOGX 100408	865,20	64098
KUB-P.2D.650.R.10-ABS80	U42 76500	65	80	228	130	185	2,8	4	SOGX 100408	865,20	65098

Screwdriver

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 16	T05 - IP	7,81	057				M1,8x3,8 - 05IP	2,99	10100
16,5 - 18				T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
18,5 - 23				T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
23,5 - 26				T08 - IP	13,16	125	M2,5x6,3 - 08IP	2,99	10800
26,5 - 30				T08 - IP	13,16	125	M3,0x7,6 - 08IP	2,99	10200
30,5 - 37				T15 - IP	15,33	128	M3,5x7,5 - 15IP	2,99	10300
37,5 - 46				T20 - IP	16,17	129	M4,5x10 - 20IP	2,99	10400
47 - 52				T08 - IP	13,16	125	M2,5x6,3 - 08IP	2,99	10800
53 - 65				T08 - IP	13,16	125	M3,5x7,5 - 15IP	2,99	10300

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

▲ ZEFF = Number of Inserts

Scope of supply:

Indexable Insert Drill incl. clamping screws

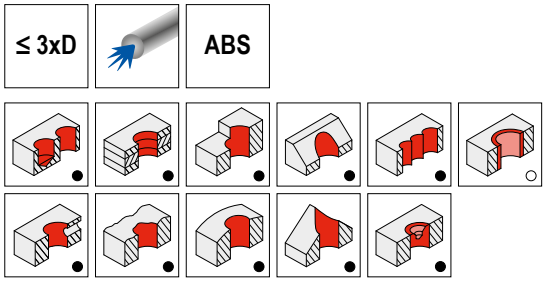

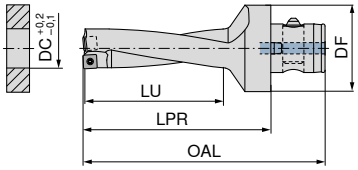

Designation	KOMET no.	DC	DF	OAL	LU	LPR	torque moment	ZEFF	Insert	10 873 ... EUR 2B/6#	
		mm	mm	mm	mm	mm	Nm				
KUB-P.3D.140.R.04-ABS50	U43 51400	**14**	50	100	42	69	0,38	2	SOGX 040204	489,30	**14095**
KUB-P.3D.145.R.04-ABS50	U43 51450	**14,5**	50	104	45	73	0,38	2	SOGX 040204	489,30	**14595**
KUB-P.3D.150.R.04-ABS50	U43 51500	**15**	50	104	45	73	0,38	2	SOGX 040204	489,30	**15095**
KUB-P.3D.155.R.04-ABS50	U43 51550	**15,5**	50	109	48	78	0,38	2	SOGX 040204	489,30	**15595**
KUB-P.3D.160.R.04-ABS50	U43 51600	**16**	50	109	48	78	0,38	2	SOGX 040204	489,30	**16095**
KUB-P.3D.165.R.05-ABS50	U43 51650	**16,5**	50	113	51	82	0,62	2	SOGX 050204	500,60	**16595**
KUB-P.3D.170.R.05-ABS50	U43 51700	**17**	50	113	51	82	0,62	2	SOGX 050204	500,60	**17095**
KUB-P.3D.175.R.05-ABS50	U43 51750	**17,5**	50	116	54	85	0,62	2	SOGX 050204	500,60	**17595**
KUB-P.3D.180.R.05-ABS50	U43 51800	**18**	50	116	54	85	0,62	2	SOGX 050204	500,60	**18095**
KUB-P.3D.185.R.06-ABS50	U43 51850	**18,5**	50	120	57	89	1,01	2	SOGX 060206	513,10	**18595**
KUB-P.3D.190.R.06-ABS50	U43 51900	**19**	50	120	57	89	1,01	2	SOGX 060206	513,10	**19095**
KUB-P.3D.195.R.06-ABS50	U43 51950	**19,5**	50	123	60	92	1,01	2	SOGX 060206	513,10	**19595**
KUB-P.3D.200.R.06-ABS50	U43 52000	**20**	50	123	60	92	1,01	2	SOGX 060206	513,10	**20095**
KUB-P.3D.205.R.07-ABS50	U43 52050	**20,5**	50	126	63	95	1,01	2	SOGX 07T208	528,30	**20595**
KUB-P.3D.210.R.07-ABS50	U43 52100	**21**	50	126	63	95	1,01	2	SOGX 07T208	528,30	**21095**
KUB-P.3D.215.R.07-ABS50	U43 52150	**21,5**	50	129	66	98	1,01	2	SOGX 07T208	528,30	**21595**
KUB-P.3D.220.R.07-ABS50	U43 52200	**22**	50	129	66	98	1,01	2	SOGX 07T208	528,30	**22095**
KUB-P.3D.225.R.07-ABS50	U43 52250	**22,5**	50	132	69	101	1,01	2	SOGX 07T208	528,30	**22595**
KUB-P.3D.230.R.07-ABS50	U43 52300	**23**	50	132	69	101	1,01	2	SOGX 07T208	528,30	**23095**
KUB-P.3D.235.R.08-ABS50	U43 52350	**23,5**	50	135	72	104	1,28	2	SOGX 080308	544,60	**23595**
KUB-P.3D.240.R.08-ABS50	U43 52400	**24**	50	135	72	104	1,28	2	SOGX 080308	544,60	**24095**
KUB-P.3D.245.R.08-ABS50	U43 52450	**24,5**	50	139	75	108	1,28	2	SOGX 080308	544,60	**24595**
KUB-P.3D.250.R.08-ABS50	U43 52500	**25**	50	139	75	108	1,28	2	SOGX 080308	544,60	**25095**
KUB-P.3D.255.R.08-ABS50	U43 52550	**25,5**	50	142	78	111	1,28	2	SOGX 080308	544,60	**25595**
KUB-P.3D.260.R.08-ABS50	U43 52600	**26**	50	142	78	111	1,28	2	SOGX 080308	544,60	**26095**
KUB-P.3D.265.R.09-ABS50	U43 52650	**26,5**	50	146	81	115	2,25	2	SOGX 09T308	610,00	**26595**
KUB-P.3D.270.R.09-ABS50	U43 52700	**27**	50	146	81	115	2,25	2	SOGX 09T308	610,00	**27095**
KUB-P.3D.275.R.09-ABS50	U43 52750	**27,5**	50	149	84	118	2,25	2	SOGX 09T308	610,00	**27595**
KUB-P.3D.280.R.09-ABS50	U43 52800	**28**	50	149	84	118	2,25	2	SOGX 09T308	610,00	**28095**
KUB-P.3D.285.R.09-ABS50	U43 52850	**28,5**	50	153	87	122	2,25	2	SOGX 09T308	610,00	**28595**
KUB-P.3D.290.R.09-ABS50	U43 52900	**29**	50	153	87	122	2,25	2	SOGX 09T308	610,00	**29095**
KUB-P.3D.295.R.09-ABS50	U43 52950	**29,5**	50	156	90	125	2,25	2	SOGX 09T308	610,00	**29595**
KUB-P.3D.300.R.09-ABS50	U43 53000	**30**	50	156	90	125	2,25	2	SOGX 09T308	610,00	**30095**
KUB-P.3D.305.R.10-ABS63	U43 63050	**30,5**	63	170	93	132	2,8	2	SOGX 100408	637,70	**30596**
KUB-P.3D.310.R.10-ABS63	U43 63100	**31**	63	170	93	132	2,8	2	SOGX 100408	637,70	**31096**
KUB-P.3D.315.R.10-ABS63	U43 63150	**31,5**	63	173	96	135	2,8	2	SOGX 100408	637,70	**31596**
KUB-P.3D.320.R.10-ABS63	U43 63200	**32**	63	173	96	135	2,8	2	SOGX 100408	637,70	**32096**
KUB-P.3D.325.R.10-ABS63	U43 63250	**32,5**	63	177	99	139	2,8	2	SOGX 100408	637,70	**32596**
KUB-P.3D.330.R.10-ABS63	U43 63300	**33**	63	177	99	139	2,8	2	SOGX 100408	637,70	**33096**
KUB-P.3D.335.R.11-ABS63	U43 63350	**33,5**	63	180	102	142	2,8	2	SOGX 110408	679,30	**33596**
KUB-P.3D.340.R.11-ABS63	U43 63400	**34**	63	180	102	142	2,8	2	SOGX 110408	679,30	**34096**
KUB-P.3D.345.R.11-ABS63	U43 63450	**34,5**	63	184	105	146	2,8	2	SOGX 110408	679,30	**34596**
KUB-P.3D.350.R.11-ABS63	U43 63500	**35**	63	184	105	146	2,8	2	SOGX 110408	679,30	**35096**
KUB-P.3D.355.R.11-ABS63	U43 63550	**35,5**	63	187	108	149	2,8	2	SOGX 110408	679,30	**35596**
KUB-P.3D.360.R.11-ABS63	U43 63600	**36**	63	187	108	149	2,8	2	SOGX 110408	679,30	**36096**
KUB-P.3D.365.R.11-ABS63	U43 63650	**36,5**	63	191	111	153	2,8	2	SOGX 110408	679,30	**36596**
KUB-P.3D.370.R.11-ABS63	U43 63700	**37**	63	191	111	153	2,8	2	SOGX 110408	679,30	**37096**
KUB-P.3D.375.R.12-ABS63	U43 63750	**37,5**	63	194	114	156	6,25	2	SOGX 120408	711,90	**37596**
KUB-P.3D.380.R.12-ABS63	U43 63800	**38**	63	194	114	156	6,25	2	SOGX 120408	711,90	**38096**
KUB-P.3D.385.R.12-ABS63	U43 63850	**38,5**	63	198	117	160	6,25	2	SOGX 120408	711,90	**38596**
KUB-P.3D.390.R.12-ABS63	U43 63900	**39**	63	198	117	160	6,25	2	SOGX 120408	711,90	**39096**
KUB-P.3D.395.R.12-ABS63	U43 63950	**39,5**	63	201	120	163	6,25	2	SOGX 120408	711,90	**39596**
KUB-P.3D.400.R.12-ABS63	U43 64000	**40**	63	201	120	163	6,25	2	SOGX 120408	711,90	**40096**
KUB-P.3D.405.R.12-ABS63	U43 64050	**40,5**	63	205	123	167	6,25	2	SOGX 120408	711,90	**40596**
KUB-P.3D.410.R.12-ABS63	U43 64100	**41**	63	205	123	167	6,25	2	SOGX 120408	711,90	**41096**

Continued on next page

KUB Pentron – Indexable insert drill

▲ ZEFF = Number of Inserts

Scope of supply:

Indexable Insert Drill incl. clamping screws

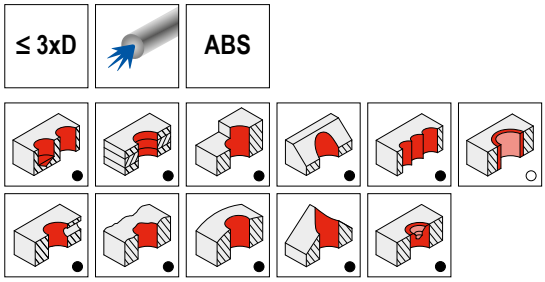

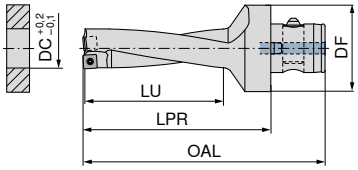

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	ZEFF	Insert	10 873 ... EUR 2B/6#	
KUB-P.3D.415.R.12-ABS63	U43 64150	41,5	63	208	126	170	6,25	2	SOGX 120408	711,90	41596
KUB-P.3D.420.R.12-ABS63	U43 64200	42	63	208	126	170	6,25	2	SOGX 120408	711,90	42096
KUB-P.3D.425.R.13-ABS63	U43 64250	42,5	63	212	129	174	6,25	2	SOGX 130508	711,90	42596
KUB-P.3D.430.R.13-ABS63	U43 64300	43	63	212	129	174	6,25	2	SOGX 130508	711,90	43096
KUB-P.3D.435.R.13-ABS63	U43 64350	43,5	63	215	132	177	6,25	2	SOGX 130508	711,90	43596
KUB-P.3D.440.R.13-ABS63	U43 64400	44	63	215	132	177	6,25	2	SOGX 130508	711,90	44096
KUB-P.3D.445.R.13-ABS63	U43 64450	44,5	63	219	135	181	6,25	2	SOGX 130508	711,90	44596
KUB-P.3D.450.R.13-ABS63	U43 64500	45	63	219	135	181	6,25	2	SOGX 130508	711,90	45096
KUB-P.3D.455.R.13-ABS63	U43 64550	45,5	63	219	138	181	6,25	2	SOGX 130508	711,90	45596
KUB-P.3D.460.R.13-ABS63	U43 64600	46	63	219	138	181	6,25	2	SOGX 130508	711,90	46096
KUB-P.3D.470.R.08-ABS63	U43 64700	47	63	234	141	196	1,28	4	SOGX 080308	801,60	47096
KUB-P.3D.480.R.08-ABS63	U43 64800	48	63	237	144	199	1,28	4	SOGX 080308	801,60	48096
KUB-P.3D.490.R.08-ABS63	U43 64900	49	63	240	147	202	1,28	4	SOGX 080308	801,60	49096
KUB-P.3D.500.R.08-ABS63	U43 65000	50	63	243	150	205	1,28	4	SOGX 080308	801,60	50096
KUB-P.3D.510.R.08-ABS63	U43 65100	51	63	246	153	208	1,28	4	SOGX 080308	801,60	51096
KUB-P.3D.520.R.08-ABS63	U43 65200	52	63	249	156	211	1,28	4	SOGX 080308	801,60	52096
KUB-P.3D.530.R.10-ABS63	U43 65300	53	63	252	159	214	2,8	4	SOGX 100408	801,60	53096
KUB-P.3D.540.R.10-ABS63	U43 65400	54	63	255	162	217	2,8	4	SOGX 100408	801,60	54096
KUB-P.3D.550.R.10-ABS80	U43 75500	55	80	263	165	220	2,8	4	SOGX 100408	964,70	55098
KUB-P.3D.560.R.10-ABS80	U43 75600	56	80	266	168	223	2,8	4	SOGX 100408	964,70	56098
KUB-P.3D.570.R.10-ABS80	U43 75700	57	80	269	171	226	2,8	4	SOGX 100408	964,70	57098
KUB-P.3D.580.R.10-ABS80	U43 75800	58	80	272	174	229	2,8	4	SOGX 100408	964,70	58098
KUB-P.3D.590.R.10-ABS80	U43 75900	59	80	275	177	232	2,8	4	SOGX 100408	964,70	59098
KUB-P.3D.600.R.10-ABS80	U43 76000	60	80	278	180	235	2,8	4	SOGX 100408	964,70	60098
KUB-P.3D.610.R.10-ABS80	U43 76100	61	80	281	183	238	2,8	4	SOGX 100408	964,70	61098
KUB-P.3D.620.R.10-ABS80	U43 76200	62	80	284	186	241	2,8	4	SOGX 100408	964,70	62098
KUB-P.3D.630.R.10-ABS80	U43 76300	63	80	287	189	244	2,8	4	SOGX 100408	964,70	63098
KUB-P.3D.640.R.10-ABS80	U43 76400	64	80	290	192	247	2,8	4	SOGX 100408	964,70	64098
KUB-P.3D.650.R.10-ABS80	U43 76500	65	80	293	195	250	2,8	4	SOGX 100408	964,70	65098

Screwdriver

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 16	T05 - IP	7,81	057				M1,8x3,8 - 05IP	2,99	10100
16,5 - 18				T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
18,5 - 23				T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
23,5 - 26				T08 - IP	13,16	125	M2,5x6,3 - 08IP	2,99	10800
26,5 - 30				T08 - IP	13,16	125	M3,0x7,6 - 08IP	2,99	10200
30,5 - 37				T15 - IP	15,33	128	M3,5x7,5 - 15IP	2,99	10300
37,5 - 46				T20 - IP	16,17	129	M4,5x10 - 20IP	2,99	10400
47 - 52				T08 - IP	13,16	125	M2,5x6,3 - 08IP	2,99	10800
53 - 65				T08 - IP	13,16	125	M3,5x7,5 - 15IP	2,99	10300

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

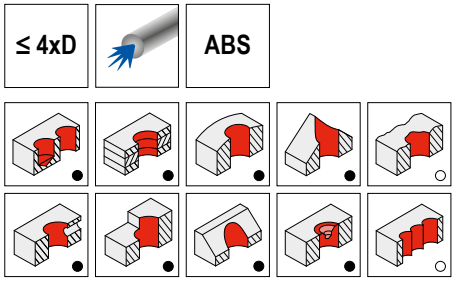

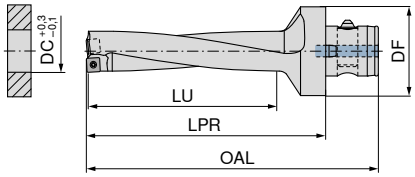

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 874 ... EUR 2B/6#	
KUB-P.4D.140.R.04-ABS50	U44 51400	14	50	114	56	83	0,38	SOGX 040204	582,40	14095
KUB-P.4D.145.R.04-ABS50	U44 51450	14,5	50	119	60	88	0,38	SOGX 040204	582,40	14595
KUB-P.4D.150.R.04-ABS50	U44 51500	15	50	119	60	88	0,38	SOGX 040204	582,40	15095
KUB-P.4D.155.R.04-ABS50	U44 51550	15,5	50	125	64	94	0,38	SOGX 040204	582,40	15595
KUB-P.4D.160.R.04-ABS50	U44 51600	16	50	125	64	94	0,38	SOGX 040204	582,40	16095
KUB-P.4D.165.R.05-ABS50	U44 51650	16,5	50	130	68	99	0,62	SOGX 050204	598,70	16595
KUB-P.4D.170.R.05-ABS50	U44 51700	17	50	130	68	99	0,62	SOGX 050204	598,70	17095
KUB-P.4D.175.R.05-ABS50	U44 51750	17,5	50	134	72	103	0,62	SOGX 050204	598,70	17595
KUB-P.4D.180.R.05-ABS50	U44 51800	18	50	134	72	103	0,62	SOGX 050204	598,70	18095
KUB-P.4D.185.R.06-ABS50	U44 51850	18,5	50	139	76	108	1,01	SOGX 060206	610,00	18595
KUB-P.4D.190.R.06-ABS50	U44 51900	19	50	139	76	108	1,01	SOGX 060206	610,00	19095
KUB-P.4D.195.R.06-ABS50	U44 51950	19,5	50	143	80	112	1,01	SOGX 060206	610,00	19595
KUB-P.4D.200.R.06-ABS50	U44 52000	20	50	143	80	112	1,01	SOGX 060206	610,00	20095
KUB-P.4D.205.R.07-ABS50	U44 52050	20,5	50	147	84	116	1,01	SOGX 07T208	634,00	20595
KUB-P.4D.210.R.07-ABS50	U44 52100	21	50	147	84	116	1,01	SOGX 07T208	634,00	21095
KUB-P.4D.215.R.07-ABS50	U44 52150	21,5	50	151	88	120	1,01	SOGX 07T208	634,00	21595
KUB-P.4D.220.R.07-ABS50	U44 52200	22	50	151	88	120	1,01	SOGX 07T208	634,00	22095
KUB-P.4D.225.R.07-ABS50	U44 52250	22,5	50	155	92	124	1,01	SOGX 07T208	634,00	22595
KUB-P.4D.230.R.07-ABS50	U44 52300	23	50	155	92	124	1,01	SOGX 07T208	634,00	23095
KUB-P.4D.235.R.08-ABS50	U44 52350	23,5	50	159	96	128	1,28	SOGX 080308	652,90	23595
KUB-P.4D.240.R.08-ABS50	U44 52400	24	50	159	96	128	1,28	SOGX 080308	652,90	24095
KUB-P.4D.245.R.08-ABS50	U44 52450	24,5	50	164	100	133	1,28	SOGX 080308	652,90	24595
KUB-P.4D.250.R.08-ABS50	U44 52500	25	50	164	100	133	1,28	SOGX 080308	652,90	25095
KUB-P.4D.255.R.08-ABS50	U44 52550	25,5	50	168	104	137	1,28	SOGX 080308	652,90	25595
KUB-P.4D.260.R.08-ABS50	U44 52600	26	50	168	104	137	1,28	SOGX 080308	652,90	26095
KUB-P.4D.265.R.09-ABS50	U44 52650	26,5	50	173	108	142	2,25	SOGX 09T308	732,10	26595
KUB-P.4D.270.R.09-ABS50	U44 52700	27	50	173	108	142	2,25	SOGX 09T308	732,10	27095
KUB-P.4D.275.R.09-ABS50	U44 52750	27,5	50	177	112	146	2,25	SOGX 09T308	732,10	27595
KUB-P.4D.280.R.09-ABS50	U44 52800	28	50	177	112	146	2,25	SOGX 09T308	732,10	28095
KUB-P.4D.285.R.09-ABS50	U44 52850	28,5	50	182	116	151	2,25	SOGX 09T308	732,10	28595
KUB-P.4D.290.R.09-ABS50	U44 52900	29	50	182	116	151	2,25	SOGX 09T308	732,10	29095
KUB-P.4D.295.R.09-ABS50	U44 52950	29,5	50	186	120	155	2,25	SOGX 09T308	732,10	29595
KUB-P.4D.300.R.09-ABS50	U44 53000	30	50	186	120	155	2,25	SOGX 09T308	732,10	30095
KUB-P.4D.305.R.10-ABS63	U44 63050	30,5	63	201	124	163	2,8	SOGX 100408	768,50	30596
KUB-P.4D.310.R.10-ABS63	U44 63100	31	63	201	124	163	2,8	SOGX 100408	768,50	31096
KUB-P.4D.315.R.10-ABS63	U44 63150	31,5	63	205	128	167	2,8	SOGX 100408	768,50	31596
KUB-P.4D.320.R.10-ABS63	U44 63200	32	63	205	128	167	2,8	SOGX 100408	768,50	32096
KUB-P.4D.325.R.10-ABS63	U44 63250	32,5	63	210	132	172	2,8	SOGX 100408	768,50	32596
KUB-P.4D.330.R.10-ABS63	U44 63300	33	63	210	132	172	2,8	SOGX 100408	768,50	33096
KUB-P.4D.335.R.11-ABS63	U44 63350	33,5	63	214	136	176	2,8	SOGX 110408	786,10	33596
KUB-P.4D.340.R.11-ABS63	U44 63400	34	63	214	136	176	2,8	SOGX 110408	786,10	34096
KUB-P.4D.345.R.11-ABS63	U44 63450	34,5	63	219	140	181	2,8	SOGX 110408	786,10	34596
KUB-P.4D.350.R.11-ABS63	U44 63500	35	63	219	140	181	2,8	SOGX 110408	786,10	35096
KUB-P.4D.355.R.11-ABS63	U44 63550	35,5	63	223	144	185	2,8	SOGX 110408	786,10	35596
KUB-P.4D.360.R.11-ABS63	U44 63600	36	63	223	144	185	2,8	SOGX 110408	786,10	36096
KUB-P.4D.365.R.11-ABS63	U44 63650	36,5	63	228	148	190	2,8	SOGX 110408	786,10	36596
KUB-P.4D.370.R.11-ABS63	U44 63700	37	63	228	148	190	2,8	SOGX 110408	786,10	37096
KUB-P.4D.375.R.12-ABS63	U44 63750	37,5	63	232	152	194	6,25	SOGX 120408	808,80	37596
KUB-P.4D.380.R.12-ABS63	U44 63800	38	63	232	152	194	6,25	SOGX 120408	808,80	38096

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

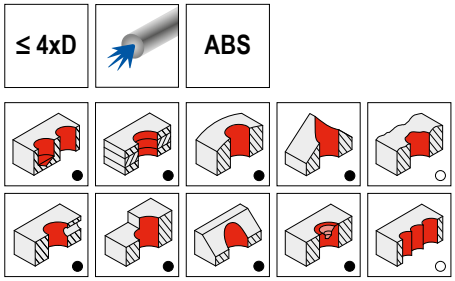

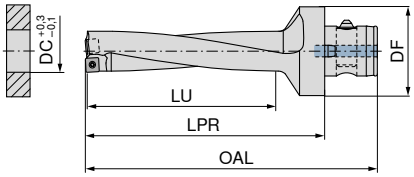

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 874 ... EUR 2B/6#	
KUB-P.4D.385.R.12-ABS63	U44 63850	38,5	63	237	156	199	6,25	SOGX 120408	808,80	38596
KUB-P.4D.390.R.12-ABS63	U44 63900	39	63	237	156	199	6,25	SOGX 120408	808,80	39096
KUB-P.4D.395.R.12-ABS63	U44 63950	39,5	63	241	160	203	6,25	SOGX 120408	808,80	39596
KUB-P.4D.400.R.12-ABS63	U44 64000	40	63	241	160	203	6,25	SOGX 120408	808,80	40096
KUB-P.4D.405.R.12-ABS63	U44 64050	40,5	63	246	164	208	6,25	SOGX 120408	808,80	40596
KUB-P.4D.410.R.12-ABS63	U44 64100	41	63	246	164	208	6,25	SOGX 120408	808,80	41096
KUB-P.4D.415.R.12-ABS63	U44 64150	41,5	63	250	168	212	6,25	SOGX 120408	808,80	41596
KUB-P.4D.420.R.12-ABS63	U44 64200	42	63	250	168	212	6,25	SOGX 120408	808,80	42096
KUB-P.4D.425.R.13-ABS63	U44 64250	42,5	63	255	172	217	6,25	SOGX 130508	866,70	42596
KUB-P.4D.430.R.13-ABS63	U44 64300	43	63	255	172	217	6,25	SOGX 130508	866,70	43096
KUB-P.4D.435.R.13-ABS63	U44 64350	43,5	63	259	176	221	6,25	SOGX 130508	866,70	43596
KUB-P.4D.440.R.13-ABS63	U44 64400	44	63	259	176	221	6,25	SOGX 130508	866,70	44096
KUB-P.4D.445.R.13-ABS63	U44 64450	44,5	63	264	180	226	6,25	SOGX 130508	866,70	44596
KUB-P.4D.450.R.13-ABS63	U44 64500	45	63	264	180	226	6,25	SOGX 130508	866,70	45096
KUB-P.4D.455.R.13-ABS63	U44 64550	45,5	63	268	184	230	6,25	SOGX 130508	866,70	45596
KUB-P.4D.460.R.13-ABS63	U44 64600	46	63	268	184	230	6,25	SOGX 130508	866,70	46096


Screwdriver

Key D

Clamping screw

Spare parts DC			80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 16	T05 - IP		7,81	057				M1,8x3,8 - 05IP	2,99	10100
16,5 - 18					T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
18,5 - 23					T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
23,5 - 26					T08 - IP	13,16	125	M2,5x6,3 - 08IP	2,99	10800
26,5 - 30					T08 - IP	13,16	125	M3,0x7,6 - 08IP	2,99	10200
30,5 - 37					T15 - IP	15,33	128	M3,5x7,5 - 15IP	2,99	10300
37,5 - 46					T20 - IP	16,17	129	M4,5x10 - 20IP	2,99	10400

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

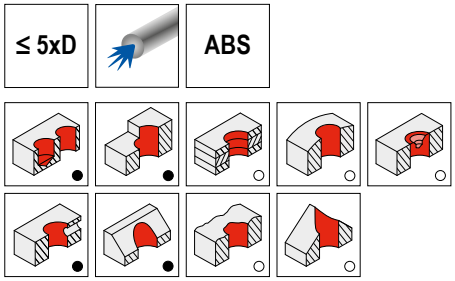

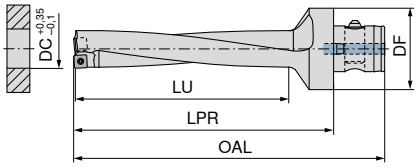

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 875 ... EUR 2B/6#	
KUB-P.5D.140.R.04-ABS50	U45 51400	14	50	128	70	97	0,38	SOGX 040204	623,90	14095
KUB-P.5D.145.R.04-ABS50	U45 51450	14,5	50	134	75	103	0,38	SOGX 040204	623,90	14595
KUB-P.5D.150.R.04-ABS50	U45 51500	15	50	134	75	103	0,38	SOGX 040204	623,90	15095
KUB-P.5D.155.R.04-ABS50	U45 51550	15,5	50	141	80	110	0,38	SOGX 040204	623,90	15595
KUB-P.5D.160.R.04-ABS50	U45 51600	16	50	141	80	110	0,38	SOGX 040204	623,90	16095
KUB-P.5D.165.R.05-ABS50	U45 51650	16,5	50	147	85	116	0,62	SOGX 050204	640,30	16595
KUB-P.5D.170.R.05-ABS50	U45 51700	17	50	147	85	116	0,62	SOGX 050204	640,30	17095
KUB-P.5D.175.R.05-ABS50	U45 51750	17,5	50	152	90	121	0,62	SOGX 050204	640,30	17595
KUB-P.5D.180.R.05-ABS50	U45 51800	18	50	152	90	121	0,62	SOGX 050204	640,30	18095
KUB-P.5D.185.R.06-ABS50	U45 51850	18,5	50	158	95	127	1,01	SOGX 060206	652,90	18595
KUB-P.5D.190.R.06-ABS50	U45 51900	19	50	158	95	127	1,01	SOGX 060206	652,90	19095
KUB-P.5D.195.R.06-ABS50	U45 51950	19,5	50	163	100	132	1,01	SOGX 060206	652,90	19595
KUB-P.5D.200.R.06-ABS50	U45 52000	20	50	163	100	132	1,01	SOGX 060206	652,90	20095
KUB-P.5D.205.R.07-ABS50	U45 52050	20,5	50	168	105	137	1,01	SOGX 07T208	675,50	20595
KUB-P.5D.210.R.07-ABS50	U45 52100	21	50	168	105	137	1,01	SOGX 07T208	675,50	21095
KUB-P.5D.215.R.07-ABS50	U45 52150	21,5	50	173	110	142	1,01	SOGX 07T208	675,50	21595
KUB-P.5D.220.R.07-ABS50	U45 52200	22	50	173	110	142	1,01	SOGX 07T208	675,50	22095
KUB-P.5D.225.R.07-ABS50	U45 52250	22,5	50	178	115	147	1,01	SOGX 07T208	675,50	22595
KUB-P.5D.230.R.07-ABS50	U45 52300	23	50	178	115	147	1,01	SOGX 07T208	675,50	23095
KUB-P.5D.235.R.08-ABS50	U45 52350	23,5	50	183	120	152	1,28	SOGX 080308	696,90	23595
KUB-P.5D.240.R.08-ABS50	U45 52400	24	50	183	120	152	1,28	SOGX 080308	696,90	24095
KUB-P.5D.245.R.08-ABS50	U45 52450	24,5	50	189	125	158	1,28	SOGX 080308	696,90	24595
KUB-P.5D.250.R.08-ABS50	U45 52500	25	50	189	125	158	1,28	SOGX 080308	696,90	25095
KUB-P.5D.255.R.08-ABS50	U45 52550	25,5	50	194	130	163	1,28	SOGX 080308	696,90	25595
KUB-P.5D.260.R.08-ABS50	U45 52600	26	50	194	130	163	1,28	SOGX 080308	696,90	26095
KUB-P.5D.265.R.09-ABS50	U45 52650	26,5	50	200	135	169	2,25	SOGX 09T308	773,60	26595
KUB-P.5D.270.R.09-ABS50	U45 52700	27	50	200	135	169	2,25	SOGX 09T308	773,60	27095
KUB-P.5D.275.R.09-ABS50	U45 52750	27,5	50	205	140	174	2,25	SOGX 09T308	773,60	27595
KUB-P.5D.280.R.09-ABS50	U45 52800	28	50	205	140	174	2,25	SOGX 09T308	773,60	28095
KUB-P.5D.285.R.09-ABS50	U45 52850	28,5	50	211	145	180	2,25	SOGX 09T308	773,60	28595
KUB-P.5D.290.R.09-ABS50	U45 52900	29	50	211	145	180	2,25	SOGX 09T308	773,60	29095
KUB-P.5D.295.R.09-ABS50	U45 52950	29,5	50	216	150	185	2,25	SOGX 09T308	773,60	29595
KUB-P.5D.300.R.09-ABS50	U45 53000	30	50	216	150	185	2,25	SOGX 09T308	773,60	30095
KUB-P.5D.305.R.10-ABS63	U45 63050	30,5	63	232	155	194	2,8	SOGX 100408	823,80	30596
KUB-P.5D.310.R.10-ABS63	U45 63100	31	63	232	155	194	2,8	SOGX 100408	823,80	31096
KUB-P.5D.315.R.10-ABS63	U45 63150	31,5	63	237	160	199	2,8	SOGX 100408	823,80	31596
KUB-P.5D.320.R.10-ABS63	U45 63200	32	63	237	160	199	2,8	SOGX 100408	823,80	32096
KUB-P.5D.325.R.10-ABS63	U45 63250	32,5	63	243	165	205	2,8	SOGX 100408	823,80	32596
KUB-P.5D.330.R.10-ABS63	U45 63300	33	63	243	165	205	2,8	SOGX 100408	823,80	33096
KUB-P.5D.335.R.11-ABS63	U45 63350	33,5	63	248	170	210	2,8	SOGX 110408	843,90	33596
KUB-P.5D.340.R.11-ABS63	U45 63400	34	63	248	170	210	2,8	SOGX 110408	843,90	34096
KUB-P.5D.345.R.11-ABS63	U45 63450	34,5	63	254	175	216	2,8	SOGX 110408	843,90	34596
KUB-P.5D.350.R.11-ABS63	U45 63500	35	63	254	175	216	2,8	SOGX 110408	843,90	35096
KUB-P.5D.355.R.11-ABS63	U45 63550	35,5	63	259	180	221	2,8	SOGX 110408	843,90	35596
KUB-P.5D.360.R.11-ABS63	U45 63600	36	63	259	180	221	2,8	SOGX 110408	843,90	36096
KUB-P.5D.365.R.11-ABS63	U45 63650	36,5	63	265	185	227	2,8	SOGX 110408	843,90	36596
KUB-P.5D.370.R.11-ABS63	U45 63700	37	63	265	185	227	2,8	SOGX 110408	843,90	37096
KUB-P.5D.375.R.12-ABS63	U45 63750	37,5	63	270	190	232	6,25	SOGX 120408	866,70	37596
KUB-P.5D.380.R.12-ABS63	U45 63800	38	63	270	190	232	6,25	SOGX 120408	866,70	38096

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

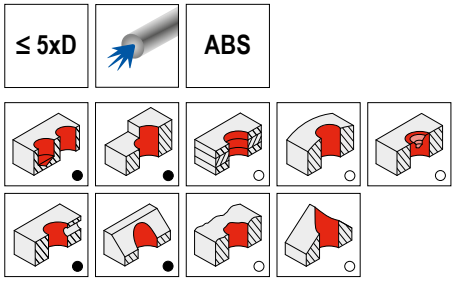

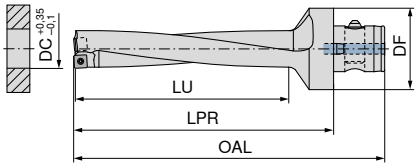

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 875 ... EUR 2B/6#	
KUB-P.5D.385.R.12-ABS63	U45 63850	38,5	63	276	195	238	6,25	SOGX 120408	866,70	38596
KUB-P.5D.390.R.12-ABS63	U45 63900	39	63	276	195	238	6,25	SOGX 120408	866,70	39096
KUB-P.5D.395.R.12-ABS63	U45 63950	39,5	63	281	200	243	6,25	SOGX 120408	866,70	39596
KUB-P.5D.400.R.12-ABS63	U45 64000	40	63	281	200	243	6,25	SOGX 120408	866,70	40096
KUB-P.5D.405.R.12-ABS63	U45 64050	40,5	63	287	205	249	6,25	SOGX 120408	866,70	40596
KUB-P.5D.410.R.12-ABS63	U45 64100	41	63	287	205	249	6,25	SOGX 120408	866,70	41096
KUB-P.5D.415.R.12-ABS63	U45 64150	41,5	63	292	210	254	6,25	SOGX 120408	866,70	41596
KUB-P.5D.420.R.12-ABS63	U45 64200	42	63	292	210	254	6,25	SOGX 120408	866,70	42096
KUB-P.5D.425.R.13-ABS63	U45 64250	42,5	63	298	215	260	6,25	SOGX 130508	937,00	42596
KUB-P.5D.430.R.13-ABS63	U45 64300	43	63	298	215	260	6,25	SOGX 130508	937,00	43096
KUB-P.5D.435.R.13-ABS63	U45 64350	43,5	63	303	220	265	6,25	SOGX 130508	937,00	43596
KUB-P.5D.440.R.13-ABS63	U45 64400	44	63	303	220	265	6,25	SOGX 130508	937,00	44096
KUB-P.5D.445.R.13-ABS63	U45 64450	44,5	63	309	225	271	6,25	SOGX 130508	937,00	44596
KUB-P.5D.450.R.13-ABS63	U45 64500	45	63	309	225	271	6,25	SOGX 130508	937,00	45096
KUB-P.5D.455.R.13-ABS63	U45 64550	45,5	63	314	230	276	6,25	SOGX 130508	937,00	45596
KUB-P.5D.460.R.13-ABS63	U45 64600	46	63	314	230	276	6,25	SOGX 130508	937,00	46096


Screwdriver

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 16	T05 - IP	7,81	057				M1,8x3,8 - 05IP	2,99	10100
16,5 - 18				T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
18,5 - 23				T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
23,5 - 26				T08 - IP	13,16	125	M2,5x6,3 - 08IP	2,99	10800
26,5 - 30				T08 - IP	13,16	125	M3,0x7,6 - 08IP	2,99	10200
30,5 - 37				T15 - IP	15,33	128	M3,5x7,5 - 15IP	2,99	10300
37,5 - 46				T20 - IP	16,17	129	M4,5x10 - 20IP	2,99	10400

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

Scope of supply:

Indexable Insert Drill incl. clamping screws

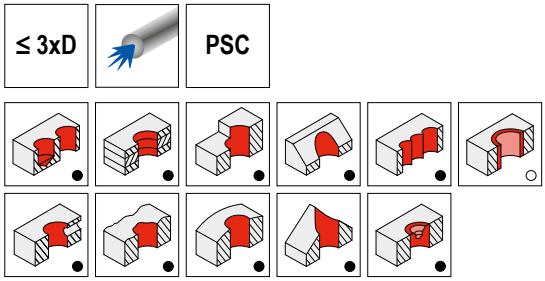

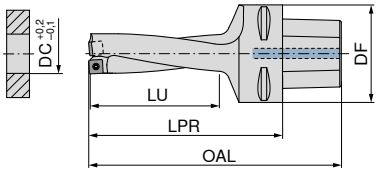

Designation	KOMET no.	DC	DF	OAL	LU	LPR	torque moment	Insert	10 873 ... EUR 2B/6#	
		mm	mm	mm	mm	mm	Nm			
KUB-P.3D.140.R.04-PSC50	U40 61400	**14**	50	103	42	73	0,38	SOGX 040204	532,00	**14055**
KUB-P.3D.145.R.04-PSC50	U40 61450	**14,5**	50	107	45	77	0,38	SOGX 040204	532,00	**14555**
KUB-P.3D.150.R.04-PSC50	U40 61500	**15**	50	107	45	77	0,38	SOGX 040204	532,00	**15055**
KUB-P.3D.155.R.04-PSC50	U40 61550	**15,5**	50	112	48	82	0,38	SOGX 040204	532,00	**15555**
KUB-P.3D.160.R.04-PSC50	U40 61600	**16**	50	112	48	82	0,38	SOGX 040204	532,00	**16055**
KUB-P.3D.160.R.04-PSC63	U40 71600	**16**	63	124	48	86	0,38	SOGX 040204	532,00	**16056**
KUB-P.3D.165.R.05-PSC50	U40 61650	**16,5**	50	116	51	86	0,62	SOGX 050204	544,60	**16555**
KUB-P.3D.170.R.05-PSC50	U40 61700	**17**	50	116	51	86	0,62	SOGX 050204	544,60	**17055**
KUB-P.3D.175.R.05-PSC50	U40 61750	**17,5**	50	119	54	89	0,62	SOGX 050204	544,60	**17555**
KUB-P.3D.180.R.05-PSC50	U40 61800	**18**	50	119	54	89	0,62	SOGX 050204	544,60	**18055**
KUB-P.3D.165.R.05-PSC63	U40 71650	**16,5**	63	128	51	90	0,62	SOGX 050204	544,60	**16556**
KUB-P.3D.170.R.05-PSC63	U40 71700	**17**	63	128	51	90	0,62	SOGX 050204	544,60	**17056**
KUB-P.3D.175.R.05-PSC63	U40 71750	**17,5**	63	131	54	93	0,62	SOGX 050204	544,60	**17556**
KUB-P.3D.180.R.05-PSC63	U40 71800	**18**	63	131	54	93	0,62	SOGX 050204	544,60	**18056**
KUB-P.3D.185.R.06-PSC50	U40 61850	**18,5**	50	123	57	93	1,01	SOGX 060206	558,60	**18555**
KUB-P.3D.190.R.06-PSC50	U40 61900	**19**	50	123	57	93	1,01	SOGX 060206	558,60	**19055**
KUB-P.3D.195.R.06-PSC50	U40 61950	**19,5**	50	126	60	96	1,01	SOGX 060206	558,60	**19555**
KUB-P.3D.200.R.06-PSC50	U40 62000	**20**	50	126	60	96	1,01	SOGX 060206	558,60	**20055**
KUB-P.3D.185.R.06-PSC63	U40 71850	**18,5**	63	135	57	97	1,01	SOGX 060206	558,60	**18556**
KUB-P.3D.190.R.06-PSC63	U40 71900	**19**	63	135	57	97	1,01	SOGX 060206	558,60	**19056**
KUB-P.3D.195.R.06-PSC63	U40 71950	**19,5**	63	138	60	100	1,01	SOGX 060206	558,60	**19556**
KUB-P.3D.200.R.06-PSC63	U40 72000	**20**	63	138	60	100	1,01	SOGX 060206	558,60	**20056**
KUB-P.3D.205.R.07-PSC50	U40 62050	**20,5**	50	130	63	100	1,01	SOGX 07T208	574,90	**20555**
KUB-P.3D.210.R.07-PSC50	U40 62100	**21**	50	130	63	100	1,01	SOGX 07T208	574,90	**21055**
KUB-P.3D.215.R.07-PSC50	U40 62150	**21,5**	50	133	66	103	1,01	SOGX 07T208	574,90	**21555**
KUB-P.3D.220.R.07-PSC50	U40 62200	**22**	50	133	66	103	1,01	SOGX 07T208	574,90	**22055**
KUB-P.3D.225.R.07-PSC50	U40 62250	**22,5**	50	137	69	107	1,01	SOGX 07T208	574,90	**22555**
KUB-P.3D.230.R.07-PSC50	U40 62300	**23**	50	137	69	107	1,01	SOGX 07T208	574,90	**23055**
KUB-P.3D.205.R.07-PSC63	U40 72050	**20,5**	63	142	63	104	1,01	SOGX 07T208	574,90	**20556**
KUB-P.3D.210.R.07-PSC63	U40 72100	**21**	63	142	63	104	1,01	SOGX 07T208	574,90	**21056**
KUB-P.3D.215.R.07-PSC63	U40 72150	**21,5**	63	145	66	107	1,01	SOGX 07T208	574,90	**21556**
KUB-P.3D.220.R.07-PSC63	U40 72200	**22**	63	145	66	107	1,01	SOGX 07T208	574,90	**22056**
KUB-P.3D.225.R.07-PSC63	U40 72250	**22,5**	63	149	69	111	1,01	SOGX 07T208	574,90	**22556**
KUB-P.3D.230.R.07-PSC63	U40 72300	**23**	63	149	69	111	1,01	SOGX 07T208	574,90	**23056**
KUB-P.3D.235.R.08-PSC50	U40 62350	**23,5**	50	140	72	110	1,28	SOGX 080308	592,40	**23555**
KUB-P.3D.240.R.08-PSC50	U40 62400	**24**	50	140	72	110	1,28	SOGX 080308	592,40	**24055**
KUB-P.3D.245.R.08-PSC50	U40 62450	**24,5**	50	144	75	114	1,28	SOGX 080308	592,40	**24555**
KUB-P.3D.250.R.08-PSC50	U40 62500	**25**	50	144	75	114	1,28	SOGX 080308	592,40	**25055**
KUB-P.3D.255.R.08-PSC50	U40 62550	**25,5**	50	147	78	117	1,28	SOGX 080308	592,40	**25555**
KUB-P.3D.260.R.08-PSC50	U40 62600	**26**	50	147	78	117	1,28	SOGX 080308	592,40	**26055**
KUB-P.3D.235.R.08-PSC63	U40 72350	**23,5**	63	152	72	114	1,28	SOGX 080308	592,40	**23556**
KUB-P.3D.240.R.08-PSC63	U40 72400	**24**	63	152	72	114	1,28	SOGX 080308	592,40	**24056**
KUB-P.3D.245.R.08-PSC63	U40 72450	**24,5**	63	156	75	118	1,28	SOGX 080308	592,40	**24556**
KUB-P.3D.250.R.08-PSC63	U40 72500	**25**	63	156	75	118	1,28	SOGX 080308	592,40	**25056**
KUB-P.3D.255.R.08-PSC63	U40 72550	**25,5**	63	159	78	121	1,28	SOGX 080308	592,40	**25556**
KUB-P.3D.260.R.08-PSC63	U40 72600	**26**	63	159	78	121	1,28	SOGX 080308	592,40	**26056**
KUB-P.3D.265.R.09-PSC50	U40 62650	**26,5**	50	151	81	121	2,25	SOGX 09T308	662,80	**26555**
KUB-P.3D.270.R.09-PSC50	U40 62700	**27**	50	151	81	121	2,25	SOGX 09T308	662,80	**27055**
KUB-P.3D.275.R.09-PSC50	U40 62750	**27,5**	50	154	84	124	2,25	SOGX 09T308	662,80	**27555**
KUB-P.3D.280.R.09-PSC50	U40 62800	**28**	50	154	84	124	2,25	SOGX 09T308	662,80	**28055**
KUB-P.3D.285.R.09-PSC50	U40 62850	**28,5**	50	158	87	128	2,25	SOGX 09T308	662,80	**28555**
KUB-P.3D.290.R.09-PSC50	U40 62900	**29**	50	158	87	128	2,25	SOGX 09T308	662,80	**29055**
KUB-P.3D.295.R.09-PSC50	U40 62950	**29,5**	50	161	90	131	2,25	SOGX 09T308	662,80	**29555**
KUB-P.3D.300.R.09-PSC50	U40 63000	**30**	50	161	90	131	2,25	SOGX 09T308	662,80	**30055**
KUB-P.3D.265.R.09-PSC63	U40 72650	**26,5**	63	163	81	125	2,25	SOGX 09T308	662,80	**26556**
KUB-P.3D.270.R.09-PSC63	U40 72700	**27**	63	163	81	125	2,25	SOGX 09T308	662,80	**27056**
KUB-P.3D.275.R.09-PSC63	U40 72750	**27,5**	63	166	84	128	2,25	SOGX 09T308	662,80	**27556**
KUB-P.3D.280.R.09-PSC63	U40 72800	**28**	63	166	84	128	2,25	SOGX 09T308	662,80	**28056**
KUB-P.3D.285.R.09-PSC63	U40 72850	**28,5**	63	170	87	132	2,25	SOGX 09T308	662,80	**28556**

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

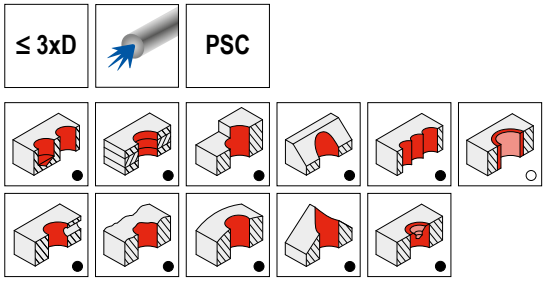

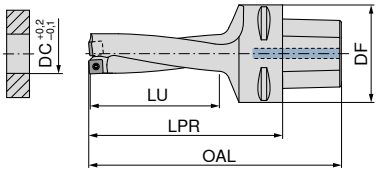

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 873 ... EUR 2B/6#	
KUB-P.3D.290.R.09-PSC63	U40 72900	**29**	63	170	87	132	2,25	SOGX 09T308	662,80	**29056**
KUB-P.3D.295.R.09-PSC63	U40 72950	**29,5**	63	173	90	135	2,25	SOGX 09T308	662,80	**29556**
KUB-P.3D.300.R.09-PSC63	U40 73000	**30**	63	173	90	135	2,25	SOGX 09T308	662,80	**30056**
KUB-P.3D.305.R.10-PSC50	U40 63050	**30,5**	50	165	98	135	2,8	SOGX 100408	677,50	**30555**
KUB-P.3D.310.R.10-PSC50	U40 63100	**31**	50	165	98	135	2,8	SOGX 100408	677,50	**31055**
KUB-P.3D.315.R.10-PSC50	U40 63150	**31,5**	50	168	101	138	2,8	SOGX 100408	677,50	**31555**
KUB-P.3D.320.R.10-PSC50	U40 63200	**32**	50	168	101	138	2,8	SOGX 100408	677,50	**32055**
KUB-P.3D.325.R.10-PSC50	U40 63250	**32,5**	50	172	104	142	2,8	SOGX 100408	677,50	**32555**
KUB-P.3D.330.R.10-PSC50	U40 63300	**33**	50	172	104	142	2,8	SOGX 100408	677,50	**33055**
KUB-P.3D.305.R.10-PSC63	U40 73050	**30,5**	63	177	98	139	2,8	SOGX 100408	677,50	**30556**
KUB-P.3D.310.R.10-PSC63	U40 73100	**31**	63	177	98	139	2,8	SOGX 100408	677,50	**31056**
KUB-P.3D.315.R.10-PSC63	U40 73150	**31,5**	63	180	101	142	2,8	SOGX 100408	677,50	**31556**
KUB-P.3D.320.R.10-PSC63	U40 73200	**32**	63	180	101	142	2,8	SOGX 100408	677,50	**32056**
KUB-P.3D.325.R.10-PSC63	U40 73250	**32,5**	63	184	104	146	2,8	SOGX 100408	682,30	**32556**
KUB-P.3D.330.R.10-PSC63	U40 73300	**33**	63	184	104	146	2,8	SOGX 100408	682,30	**33056**
KUB-P.3D.335.R.11-PSC50	U40 63350	**33,5**	50	175	107	145	2,8	SOGX 110408	683,50	**33555**
KUB-P.3D.340.R.11-PSC50	U40 63400	**34**	50	175	107	145	2,8	SOGX 110408	683,50	**34055**
KUB-P.3D.345.R.11-PSC50	U40 63450	**34,5**	50	179	110	149	2,8	SOGX 110408	683,50	**34555**
KUB-P.3D.350.R.11-PSC50	U40 63500	**35**	50	179	110	149	2,8	SOGX 110408	683,50	**35055**
KUB-P.3D.355.R.11-PSC50	U40 63550	**35,5**	50	182	113	152	2,8	SOGX 110408	691,30	**35555**
KUB-P.3D.360.R.11-PSC50	U40 63600	**36**	50	182	113	152	2,8	SOGX 110408	691,30	**36055**
KUB-P.3D.365.R.11-PSC50	U40 63650	**36,5**	50	186	116	156	2,8	SOGX 110408	691,30	**36555**
KUB-P.3D.370.R.11-PSC50	U40 63700	**37**	50	186	116	156	2,8	SOGX 110408	691,30	**37055**
KUB-P.3D.335.R.11-PSC63	U40 73350	**33,5**	63	187	107	149	2,8	SOGX 110408	691,30	**33556**
KUB-P.3D.340.R.11-PSC63	U40 73400	**34**	63	187	107	149	2,8	SOGX 110408	691,30	**34056**
KUB-P.3D.345.R.11-PSC63	U40 73450	**34,5**	63	191	110	153	2,8	SOGX 110408	691,30	**34556**
KUB-P.3D.350.R.11-PSC63	U40 73500	**35**	63	191	110	153	2,8	SOGX 110408	691,30	**35056**
KUB-P.3D.355.R.11-PSC63	U40 73550	**35,5**	63	194	113	156	2,8	SOGX 110408	691,30	**35556**
KUB-P.3D.360.R.11-PSC63	U40 73600	**36**	63	194	113	156	2,8	SOGX 110408	691,30	**36056**
KUB-P.3D.365.R.11-PSC63	U40 73650	**36,5**	63	198	116	160	2,8	SOGX 110408	691,30	**36556**
KUB-P.3D.370.R.11-PSC63	U40 73700	**37**	63	198	116	160	2,8	SOGX 110408	691,30	**37056**

Screwdriver

Key D

Clamping screw

Spare parts DC	80 950 ... EUR Y7		80 950 ... EUR Y7		10 950 ... EUR W7/6B	
14 - 16	T05 - IP 7,81	**057**			M1,8x3,8 - 05IP 2,99	**10100**
16,5 - 18			T06 - IP 13,39	**123**	M2,0x4,3 - 06IP 2,99	**10000**
18,5 - 23			T06 - IP 13,39	**123**	M2,2x5,5 - 06IP 2,99	**10700**
23,5 - 26			T08 - IP 13,16	**125**	M2,5x6,3 - 08IP 2,99	**10800**
26,5 - 30			T08 - IP 13,16	**125**	M3,0x7,6 - 08IP 2,99	**10200**
30,5 - 37			T15 - IP 15,33	**128**	M3,5x7,5 - 15IP 2,99	**10300**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Size PSC 40 available on request.

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

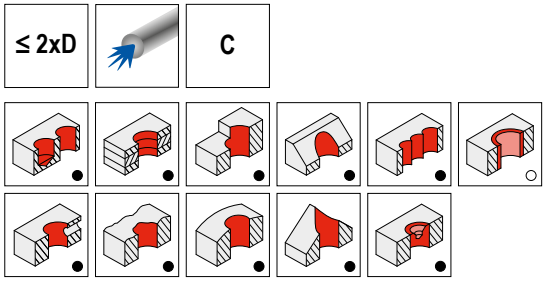

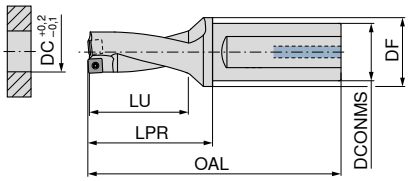

10 872 ...

Designation	KOMET no.	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#	
KUB-P.2D.140.R.04-C20	U42 01400	14	20	30	91	28	41	0,38	SOGX 040204	386,20	14001
KUB-P.2D.145.R.04-C20	U42 01450	14,5	20	30	94	30	44	0,38	SOGX 040204	386,20	14501
KUB-P.2D.150.R.04-C20	U42 01500	15	20	30	94	30	44	0,38	SOGX 040204	386,20	15001
KUB-P.2D.155.R.04-C20	U42 01550	15,5	20	30	98	32	48	0,38	SOGX 040204	386,20	15501
KUB-P.2D.160.R.04-C20	U42 01600	16	20	30	98	32	48	0,38	SOGX 040204	386,20	16001
KUB-P.2D.165.R.05-C20	U42 01650	16,5	20	30	101	34	51	0,62	SOGX 050204	393,70	16501
KUB-P.2D.170.R.05-C20	U42 01700	17	20	30	101	34	51	0,62	SOGX 050204	393,70	17001
KUB-P.2D.175.R.05-C25	U42 11750	17,5	25	30	109	36	53	0,62	SOGX 050204	393,70	17502
KUB-P.2D.180.R.05-C25	U42 11800	18	25	30	109	36	53	0,62	SOGX 050204	393,70	18002
KUB-P.2D.185.R.06-C25	U42 11850	18,5	25	30	112	38	56	1,01	SOGX 060206	402,50	18502
KUB-P.2D.190.R.06-C25	U42 11900	19	25	30	112	38	56	1,01	SOGX 060206	402,50	19002
KUB-P.2D.195.R.06-C25	U42 11950	19,5	25	30	114	40	58	1,01	SOGX 060206	402,50	19502
KUB-P.2D.200.R.06-C25	U42 12000	20	25	30	114	40	58	1,01	SOGX 060206	402,50	20002
KUB-P.2D.205.R.07-C25	U42 12050	20,5	25	30	117	42	61	1,01	SOGX 07T208	428,80	20502
KUB-P.2D.210.R.07-C25	U42 12100	21	25	30	117	42	61	1,01	SOGX 07T208	428,80	21002
KUB-P.2D.215.R.07-C25	U42 12150	21,5	25	30	119	44	63	1,01	SOGX 07T208	428,80	21502
KUB-P.2D.220.R.07-C25	U42 12200	22	25	30	119	44	63	1,01	SOGX 07T208	428,80	22002
KUB-P.2D.225.R.07-C25	U42 12250	22,5	25	30	122	46	66	1,01	SOGX 07T208	428,80	22502
KUB-P.2D.230.R.07-C25	U42 12300	23	25	30	122	46	66	1,01	SOGX 07T208	428,80	23002
KUB-P.2D.235.R.08-C32	U42 22350	23,5	32	39	128	48	68	1,28	SOGX 080308	465,30	23503
KUB-P.2D.240.R.08-C32	U42 22400	24	32	39	128	48	68	1,28	SOGX 080308	465,30	24003
KUB-P.2D.245.R.08-C32	U42 22450	24,5	32	39	131	50	71	1,28	SOGX 080308	465,30	24503
KUB-P.2D.250.R.08-C32	U42 22500	25	32	39	131	50	71	1,28	SOGX 080308	465,30	25003
KUB-P.2D.255.R.08-C32	U42 22550	25,5	32	39	133	52	73	1,28	SOGX 080308	465,30	25503
KUB-P.2D.260.R.08-C32	U42 22600	26	32	39	133	52	73	1,28	SOGX 080308	465,30	26003
KUB-P.2D.265.R.09-C32	U42 22650	26,5	32	39	136	54	76	2,25	SOGX 09T308	491,80	26503
KUB-P.2D.270.R.09-C32	U42 22700	27	32	39	136	54	76	2,25	SOGX 09T308	491,80	27003
KUB-P.2D.275.R.09-C32	U42 22750	27,5	32	39	138	56	78	2,25	SOGX 09T308	491,80	27503
KUB-P.2D.280.R.09-C32	U42 22800	28	32	39	138	56	78	2,25	SOGX 09T308	491,80	28003
KUB-P.2D.285.R.09-C32	U42 22850	28,5	32	39	141	58	81	2,25	SOGX 09T308	491,80	28503
KUB-P.2D.290.R.09-C32	U42 22900	29	32	39	141	58	81	2,25	SOGX 09T308	491,80	29003
KUB-P.2D.295.R.09-C32	U42 22950	29,5	32	39	143	60	83	2,25	SOGX 09T308	491,80	29503
KUB-P.2D.300.R.09-C32	U42 23000	30	32	39	143	60	83	2,25	SOGX 09T308	491,80	30003
KUB-P.2D.305.R.10-C40	U42 33050	30,5	40	50	154	62	86	2,8	SOGX 100408	534,60	30504
KUB-P.2D.310.R.10-C40	U42 33100	31	40	50	154	62	86	2,8	SOGX 100408	534,60	31004
KUB-P.2D.315.R.10-C40	U42 33150	31,5	40	50	156	64	88	2,8	SOGX 100408	534,60	31504
KUB-P.2D.320.R.10-C40	U42 33200	32	40	50	156	64	88	2,8	SOGX 100408	534,60	32004
KUB-P.2D.325.R.10-C40	U42 33250	32,5	40	50	159	66	91	2,8	SOGX 100408	534,60	32504
KUB-P.2D.330.R.10-C40	U42 33300	33	40	50	159	66	91	2,8	SOGX 100408	534,60	33004
KUB-P.2D.335.R.11-C40	U42 33350	33,5	40	50	161	68	93	2,8	SOGX 110408	559,70	33504
KUB-P.2D.340.R.11-C40	U42 33400	34	40	50	161	68	93	2,8	SOGX 110408	559,70	34004
KUB-P.2D.345.R.11-C40	U42 33450	34,5	40	50	164	70	96	2,8	SOGX 110408	559,70	34504
KUB-P.2D.350.R.11-C40	U42 33500	35	40	50	164	70	96	2,8	SOGX 110408	559,70	35004
KUB-P.2D.355.R.11-C40	U42 33550	35,5	40	50	166	72	98	2,8	SOGX 110408	559,70	35504
KUB-P.2D.360.R.11-C40	U42 33600	36	40	50	166	72	98	2,8	SOGX 110408	559,70	36004
KUB-P.2D.365.R.11-C40	U42 33650	36,5	40	50	169	74	101	2,8	SOGX 110408	559,70	36504
KUB-P.2D.370.R.11-C40	U42 33700	37	40	50	169	74	101	2,8	SOGX 110408	559,70	37004
KUB-P.2D.375.R.12-C40	U42 33750	37,5	40	50	171	76	103	6,25	SOGX 120408	576,10	37504
KUB-P.2D.380.R.12-C40	U42 33800	38	40	50	171	76	103	6,25	SOGX 120408	576,10	38004
KUB-P.2D.385.R.12-C40	U42 33850	38,5	40	50	174	78	106	6,25	SOGX 120408	576,10	38504

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

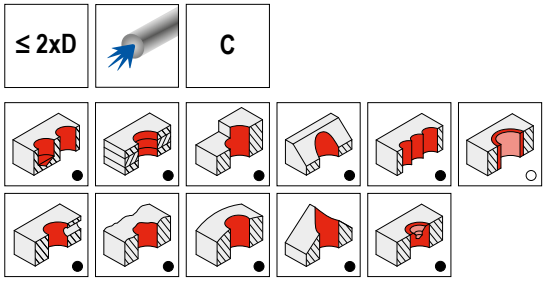

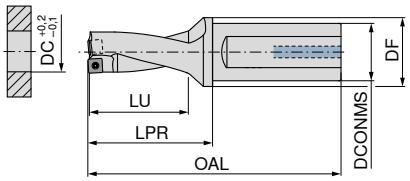

Designation	KOMET no.	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 872 ... EUR 2B/6#	
KUB-P.2D.390.R.12-C40	U42 33900	**39**	40	50	174	78	106	6,25	SOGX 120408	576,10	**39004**
KUB-P.2D.395.R.12-C40	U42 33950	**39,5**	40	50	176	80	108	6,25	SOGX 120408	576,10	**39504**
KUB-P.2D.400.R.12-C40	U42 34000	**40**	40	50	176	80	108	6,25	SOGX 120408	576,10	**40004**
KUB-P.2D.405.R.12-C40	U42 34050	**40,5**	40	50	179	82	111	6,25	SOGX 120408	576,10	**40504**
KUB-P.2D.410.R.12-C40	U42 34100	**41**	40	50	179	82	111	6,25	SOGX 120408	576,10	**41004**
KUB-P.2D.415.R.12-C40	U42 34150	**41,5**	40	50	181	84	113	6,25	SOGX 120408	576,10	**41504**
KUB-P.2D.420.R.12-C40	U42 34200	**42**	40	50	181	84	113	6,25	SOGX 120408	576,10	**42004**
KUB-P.2D.425.R.13-C40	U42 34250	**42,5**	40	50	184	86	116	6,25	SOGX 130508	576,10	**42504**
KUB-P.2D.430.R.13-C40	U42 34300	**43**	40	50	184	86	116	6,25	SOGX 130508	576,10	**43004**
KUB-P.2D.435.R.13-C40	U42 34350	**43,5**	40	50	186	88	118	6,25	SOGX 130508	576,10	**43504**
KUB-P.2D.440.R.13-C40	U42 34400	**44**	40	50	186	88	118	6,25	SOGX 130508	576,10	**44004**
KUB-P.2D.445.R.13-C40	U42 34450	**44,5**	40	50	189	90	121	6,25	SOGX 130508	576,10	**44504**
KUB-P.2D.450.R.13-C40	U42 34500	**45**	40	50	189	90	121	6,25	SOGX 130508	576,10	**45004**
KUB-P.2D.455.R.13-C40	U42 34550	**45,5**	40	50	191	92	123	6,25	SOGX 130508	576,10	**45504**
KUB-P.2D.460.R.13-C40	U42 34600	**46**	40	50	191	92	123	6,25	SOGX 130508	576,10	**46004**

Screwdriver

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 16	T05 - IP	7,81	**057**				M1,8x3,8 - 05IP	2,99	**10100**
16,5 - 18				T06 - IP	13,39	**123**	M2,0x4,3 - 06IP	2,99	**10000**
18,5 - 23				T06 - IP	13,39	**123**	M2,2x5,5 - 06IP	2,99	**10700**
23,5 - 26				T08 - IP	13,16	**125**	M2,5x6,3 - 08IP	2,99	**10800**
26,5 - 30				T08 - IP	13,16	**125**	M3,0x7,6 - 08IP	2,99	**10200**
30,5 - 37				T15 - IP	15,33	**128**	M3,5x7,5 - 15IP	2,99	**10300**
37,5 - 46				T20 - IP	16,17	**129**	M4,5x10 - 20IP	2,99	**10400**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

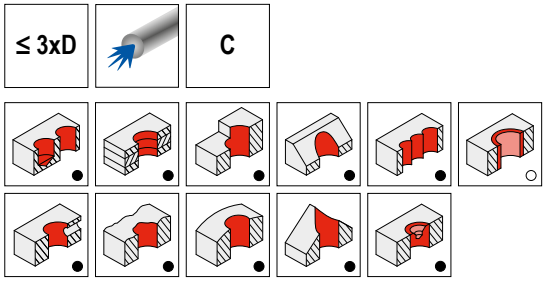

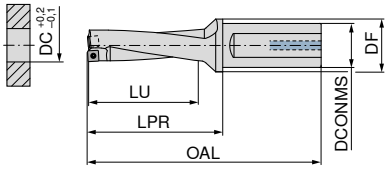

10 873 ...

Designation	KOMET no.	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#	
KUB-P.3D.140.R.04-C20	U43 01400	14	20	30	105	42	55	0,38	SOGX 040204	401,30	14001
KUB-P.3D.145.R.04-C20	U43 01450	14,5	20	30	109	45	59	0,38	SOGX 040204	401,30	14501
KUB-P.3D.150.R.04-C20	U43 01500	15	20	30	109	45	59	0,38	SOGX 040204	401,30	15001
KUB-P.3D.155.R.04-C20	U43 01550	15,5	20	30	114	48	64	0,38	SOGX 040204	401,30	15501
KUB-P.3D.160.R.04-C20	U43 01600	16	20	30	114	48	64	0,38	SOGX 040204	401,30	16001
KUB-P.3D.165.R.05-C20	U43 01650	16,5	20	30	118	51	68	0,62	SOGX 050204	411,30	16501
KUB-P.3D.170.R.05-C20	U43 01700	17	20	30	118	51	68	0,62	SOGX 050204	411,30	17001
KUB-P.3D.175.R.05-C25	U43 11750	17,5	25	30	127	54	71	0,62	SOGX 050204	411,30	17501
KUB-P.3D.180.R.05-C25	U43 11800	18	25	30	127	54	71	0,62	SOGX 050204	411,30	18001
KUB-P.3D.185.R.06-C25	U43 11850	18,5	25	30	131	57	75	1,01	SOGX 060206	423,90	18501
KUB-P.3D.190.R.06-C25	U43 11900	19	25	30	131	57	75	1,01	SOGX 060206	423,90	19001
KUB-P.3D.195.R.06-C25	U43 11950	19,5	25	30	134	60	78	1,01	SOGX 060206	423,90	19501
KUB-P.3D.200.R.06-C25	U43 12000	20	25	30	134	60	78	1,01	SOGX 060206	423,90	20001
KUB-P.3D.205.R.07-C25	U43 12050	20,5	25	30	138	63	82	1,01	SOGX 07T208	451,60	20501
KUB-P.3D.210.R.07-C25	U43 12100	21	25	30	138	63	82	1,01	SOGX 07T208	451,60	21001
KUB-P.3D.215.R.07-C25	U43 12150	21,5	25	30	141	66	85	1,01	SOGX 07T208	451,60	21501
KUB-P.3D.220.R.07-C25	U43 12200	22	25	30	141	66	85	1,01	SOGX 07T208	451,60	22002
KUB-P.3D.225.R.07-C25	U43 12250	22,5	25	30	145	69	89	1,01	SOGX 07T208	451,60	22502
KUB-P.3D.230.R.07-C25	U43 12300	23	25	30	145	69	89	1,01	SOGX 07T208	451,60	23002
KUB-P.3D.235.R.08-C32	U43 22350	23,5	32	39	152	72	92	1,28	SOGX 080308	489,30	23503
KUB-P.3D.240.R.08-C32	U43 22400	24	32	39	152	72	92	1,28	SOGX 080308	489,30	24003
KUB-P.3D.245.R.08-C32	U43 22450	24,5	32	39	156	75	96	1,28	SOGX 080308	489,30	24503
KUB-P.3D.250.R.08-C32	U43 22500	25	32	39	156	75	96	1,28	SOGX 080308	489,30	25003
KUB-P.3D.255.R.08-C32	U43 22550	25,5	32	39	159	78	99	1,28	SOGX 080308	489,30	25503
KUB-P.3D.260.R.08-C32	U43 22600	26	32	39	159	78	99	1,28	SOGX 080308	489,30	26003
KUB-P.3D.265.R.09-C32	U43 22650	26,5	32	39	163	81	103	2,25	SOGX 09T308	514,50	26503
KUB-P.3D.270.R.09-C32	U43 22700	27	32	39	163	81	103	2,25	SOGX 09T308	514,50	27003
KUB-P.3D.275.R.09-C32	U43 22750	27,5	32	39	166	84	106	2,25	SOGX 09T308	514,50	27503
KUB-P.3D.280.R.09-C32	U43 22800	28	32	39	166	84	106	2,25	SOGX 09T308	514,50	28003
KUB-P.3D.285.R.09-C32	U43 22850	28,5	32	39	170	87	110	2,25	SOGX 09T308	514,50	28503
KUB-P.3D.290.R.09-C32	U43 22900	29	32	39	170	87	110	2,25	SOGX 09T308	514,50	29003
KUB-P.3D.295.R.09-C32	U43 22950	29,5	32	39	173	90	113	2,25	SOGX 09T308	514,50	29503
KUB-P.3D.300.R.09-C32	U43 23000	30	32	39	173	90	113	2,25	SOGX 09T308	514,50	30003
KUB-P.3D.305.R.10-C40	U43 33050	30,5	40	50	185	93	117	2,8	SOGX 100408	560,90	30504
KUB-P.3D.310.R.10-C40	U43 33100	31	40	50	185	93	117	2,8	SOGX 100408	560,90	31004
KUB-P.3D.315.R.10-C40	U43 33150	31,5	40	50	188	96	120	2,8	SOGX 100408	560,90	31504
KUB-P.3D.320.R.10-C40	U43 33200	32	40	50	188	96	120	2,8	SOGX 100408	560,90	32004
KUB-P.3D.325.R.10-C40	U43 33250	32,5	40	50	192	99	124	2,8	SOGX 100408	560,90	32504
KUB-P.3D.330.R.10-C40	U43 33300	33	40	50	192	99	124	2,8	SOGX 100408	560,90	33004
KUB-P.3D.335.R.11-C40	U43 33350	33,5	40	50	195	102	127	2,8	SOGX 110408	587,50	33504
KUB-P.3D.340.R.11-C40	U43 33400	34	40	50	195	102	127	2,8	SOGX 110408	587,50	34004
KUB-P.3D.345.R.11-C40	U43 33450	34,5	40	50	199	105	131	2,8	SOGX 110408	587,50	34504
KUB-P.3D.350.R.11-C40	U43 33500	35	40	50	199	105	131	2,8	SOGX 110408	587,50	35004
KUB-P.3D.355.R.11-C40	U43 33550	35,5	40	50	202	108	134	2,8	SOGX 110408	587,50	35504
KUB-P.3D.360.R.11-C40	U43 33600	36	40	50	202	108	134	2,8	SOGX 110408	587,50	36004
KUB-P.3D.365.R.11-C40	U43 33650	36,5	40	50	206	111	138	2,8	SOGX 110408	587,50	36504
KUB-P.3D.370.R.11-C40	U43 33700	37	40	50	206	111	138	2,8	SOGX 110408	587,50	37004
KUB-P.3D.375.R.12-C40	U43 33750	37,5	40	50	209	114	141	6,25	SOGX 120408	605,00	37504
KUB-P.3D.380.R.12-C40	U43 33800	38	40	50	209	114	141	6,25	SOGX 120408	605,00	38004
KUB-P.3D.385.R.12-C40	U43 33850	38,5	40	50	213	117	145	6,25	SOGX 120408	605,00	38504

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

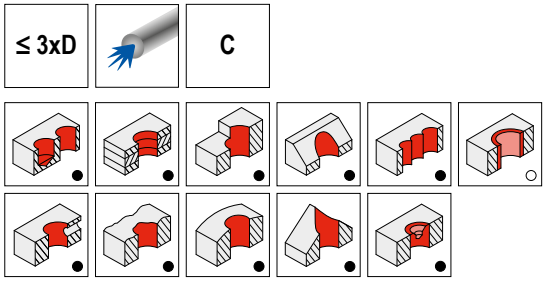

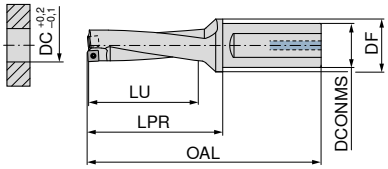

										10 873 ...
Designation	KOMET no.	**DC** mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#
KUB-P.3D.390.R.12-C40	U43 33900	**39**	40	50	213	117	145	6,25	SOGX 120408	605,00 **39004**
KUB-P.3D.395.R.12-C40	U43 33950	**39,5**	40	50	216	120	148	6,25	SOGX 120408	605,00 **39504**
KUB-P.3D.400.R.12-C40	U43 34000	**40**	40	50	216	120	148	6,25	SOGX 120408	605,00 **40004**
KUB-P.3D.405.R.12-C40	U43 34050	**40,5**	40	50	220	123	152	6,25	SOGX 120408	605,00 **40504**
KUB-P.3D.410.R.12-C40	U43 34100	**41**	40	50	220	123	152	6,25	SOGX 120408	605,00 **41004**
KUB-P.3D.415.R.12-C40	U43 34150	**41,5**	40	50	223	126	155	6,25	SOGX 120408	605,00 **41504**
KUB-P.3D.420.R.12-C40	U43 34200	**42**	40	50	223	126	155	6,25	SOGX 120408	605,00 **42004**
KUB-P.3D.425.R.13-C40	U43 34250	**42,5**	40	50	227	129	159	6,25	SOGX 130508	605,00 **42504**
KUB-P.3D.430.R.13-C40	U43 34300	**43**	40	50	227	129	159	6,25	SOGX 130508	605,00 **43004**
KUB-P.3D.435.R.13-C40	U43 34350	**43,5**	40	50	230	132	162	6,25	SOGX 130508	605,00 **43504**
KUB-P.3D.440.R.13-C40	U43 34400	**44**	40	50	230	132	162	6,25	SOGX 130508	605,00 **44004**
KUB-P.3D.445.R.13-C40	U43 34450	**44,5**	40	50	234	135	166	6,25	SOGX 130508	605,00 **44504**
KUB-P.3D.450.R.13-C40	U43 34500	**45**	40	50	234	135	166	6,25	SOGX 130508	605,00 **45004**
KUB-P.3D.455.R.13-C40	U43 34550	**45,5**	40	50	237	138	169	6,25	SOGX 130508	605,00 **45504**
KUB-P.3D.460.R.13-C40	U43 34600	**46**	40	50	237	138	169	6,25	SOGX 130508	605,00 **46004**

Screwdriver

Key D

Clamping screw

Spare parts											
						80 950 ...			**80 950 ...**		**10 950 ...**
DC						EUR Y7			EUR Y7		EUR W7/6B
14 - 16		T05 - IP	7,81	**057**						M1,8x3,8 - 05IP	2,99 **10100**
16,5 - 18							T06 - IP	13,39	**123**	M2,0x4,3 - 06IP	2,99 **10000**
18,5 - 23							T06 - IP	13,39	**123**	M2,2x5,5 - 06IP	2,99 **10700**
23,5 - 26							T08 - IP	13,16	**125**	M2,5x6,3 - 08IP	2,99 **10800**
26,5 - 30							T08 - IP	13,16	**125**	M3,0x7,6 - 08IP	2,99 **10200**
30,5 - 37							T15 - IP	15,33	**128**	M3,5x7,5 - 15IP	2,99 **10300**
37,5 - 46							T20 - IP	16,17	**129**	M4,5x10 - 20IP	2,99 **10400**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

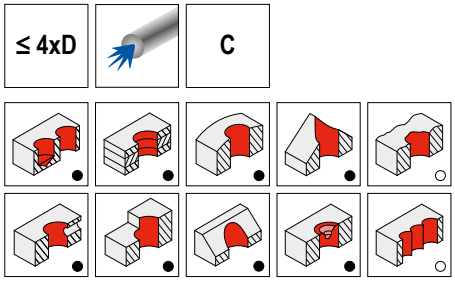

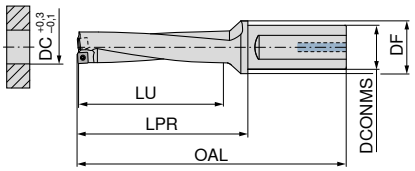

10 874 ...

Designation	KOMET no.	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#	
KUB-P.4D.140.R.04-C20	U44 01400	14	20	30	119	56	69	0,38	SOGX 040204	512,00	14001
KUB-P.4D.145.R.04-C20	U44 01450	14,5	20	30	124	60	74	0,38	SOGX 040204	512,00	14501
KUB-P.4D.150.R.04-C20	U44 01500	15	20	30	124	60	74	0,38	SOGX 040204	512,00	15001
KUB-P.4D.155.R.04-C20	U44 01550	15,5	20	30	130	64	80	0,38	SOGX 040204	512,00	15501
KUB-P.4D.160.R.04-C20	U44 01600	16	20	30	130	64	80	0,38	SOGX 040204	512,00	16001
KUB-P.4D.165.R.05-C20	U44 01650	16,5	20	30	135	68	85	0,62	SOGX 050204	525,70	16501
KUB-P.4D.170.R.05-C20	U44 01700	17	20	30	135	68	85	0,62	SOGX 050204	525,70	17001
KUB-P.4D.175.R.05-C25	U44 11750	17,5	25	30	145	72	89	0,62	SOGX 050204	525,70	17502
KUB-P.4D.180.R.05-C25	U44 11800	18	25	30	145	72	89	0,62	SOGX 050204	525,70	18002
KUB-P.4D.185.R.06-C25	U44 11850	18,5	25	30	150	76	94	1,01	SOGX 060206	540,80	18502
KUB-P.4D.190.R.06-C25	U44 11900	19	25	30	150	76	94	1,01	SOGX 060206	540,80	19002
KUB-P.4D.195.R.06-C25	U44 11950	19,5	25	30	154	80	98	1,01	SOGX 060206	540,80	19502
KUB-P.4D.200.R.06-C25	U44 12000	20	25	30	154	80	98	1,01	SOGX 060206	540,80	20002
KUB-P.4D.205.R.07-C25	U44 12050	20,5	25	30	159	84	103	1,01	SOGX 07T208	560,90	20502
KUB-P.4D.210.R.07-C25	U44 12100	21	25	30	159	84	103	1,01	SOGX 07T208	560,90	21002
KUB-P.4D.215.R.07-C25	U44 12150	21,5	25	30	163	88	107	1,01	SOGX 07T208	560,90	21502
KUB-P.4D.220.R.07-C25	U44 12200	22	25	30	163	88	107	1,01	SOGX 07T208	560,90	22002
KUB-P.4D.225.R.07-C25	U44 12250	22,5	25	30	168	92	112	1,01	SOGX 07T208	560,90	22502
KUB-P.4D.230.R.07-C25	U44 12300	23	25	30	168	92	112	1,01	SOGX 07T208	560,90	23002
KUB-P.4D.235.R.08-C32	U44 22350	23,5	32	39	176	96	116	1,28	SOGX 080308	582,40	23503
KUB-P.4D.240.R.08-C32	U44 22400	24	32	39	176	96	116	1,28	SOGX 080308	582,40	24003
KUB-P.4D.245.R.08-C32	U44 22450	24,5	32	39	181	100	121	1,28	SOGX 080308	582,40	24503
KUB-P.4D.250.R.08-C32	U44 22500	25	32	39	181	100	121	1,28	SOGX 080308	582,40	25003
KUB-P.4D.255.R.08-C32	U44 22550	25,5	32	39	185	104	125	1,28	SOGX 080308	582,40	25503
KUB-P.4D.260.R.08-C32	U44 22600	26	32	39	185	104	125	1,28	SOGX 080308	582,40	26003
KUB-P.4D.265.R.09-C32	U44 22650	26,5	32	39	190	108	130	2,25	SOGX 09T308	657,80	26503
KUB-P.4D.270.R.09-C32	U44 22700	27	32	39	190	108	130	2,25	SOGX 09T308	657,80	27003
KUB-P.4D.275.R.09-C32	U44 22750	27,5	32	39	194	112	134	2,25	SOGX 09T308	657,80	27503
KUB-P.4D.280.R.09-C32	U44 22800	28	32	39	194	112	134	2,25	SOGX 09T308	657,80	28003
KUB-P.4D.285.R.09-C32	U44 22850	28,5	32	39	199	116	139	2,25	SOGX 09T308	657,80	28503
KUB-P.4D.290.R.09-C32	U44 22900	29	32	39	199	116	139	2,25	SOGX 09T308	657,80	29003
KUB-P.4D.295.R.09-C32	U44 22950	29,5	32	39	203	120	143	2,25	SOGX 09T308	657,80	29503
KUB-P.4D.300.R.09-C32	U44 23000	30	32	39	203	120	143	2,25	SOGX 09T308	657,80	30003
KUB-P.4D.305.R.10-C40	U44 33050	30,5	40	50	216	124	148	2,8	SOGX 100408	696,90	30504
KUB-P.4D.310.R.10-C40	U44 33100	31	40	50	216	124	148	2,8	SOGX 100408	696,90	31004
KUB-P.4D.315.R.10-C40	U44 33150	31,5	40	50	220	128	152	2,8	SOGX 100408	696,90	31504
KUB-P.4D.320.R.10-C40	U44 33200	32	40	50	220	128	152	2,8	SOGX 100408	696,90	32004
KUB-P.4D.325.R.10-C40	U44 33250	32,5	40	50	225	132	157	2,8	SOGX 100408	696,90	32504
KUB-P.4D.330.R.10-C40	U44 33300	33	40	50	225	132	157	2,8	SOGX 100408	696,90	33004
KUB-P.4D.335.R.11-C40	U44 33350	33,5	40	50	229	136	161	2,8	SOGX 110408	717,00	33504
KUB-P.4D.340.R.11-C40	U44 33400	34	40	50	229	136	161	2,8	SOGX 110408	717,00	34004
KUB-P.4D.345.R.11-C40	U44 33450	34,5	40	50	234	140	166	2,8	SOGX 110408	717,00	34504
KUB-P.4D.350.R.11-C40	U44 33500	35	40	50	234	140	166	2,8	SOGX 110408	717,00	35004
KUB-P.4D.355.R.11-C40	U44 33550	35,5	40	50	238	144	170	2,8	SOGX 110408	717,00	35504
KUB-P.4D.360.R.11-C40	U44 33600	36	40	50	238	144	170	2,8	SOGX 110408	717,00	36004
KUB-P.4D.365.R.11-C40	U44 33650	36,5	40	50	243	148	175	2,8	SOGX 110408	717,00	36504
KUB-P.4D.370.R.11-C40	U44 33700	37	40	50	243	148	175	2,8	SOGX 110408	717,00	37004
KUB-P.4D.375.R.12-C40	U44 33750	37,5	40	50	247	152	179	6,25	SOGX 120408	739,60	37504
KUB-P.4D.380.R.12-C40	U44 33800	38	40	50	247	152	179	6,25	SOGX 120408	739,60	38004
KUB-P.4D.385.R.12-C40	U44 33850	38,5	40	50	252	156	184	6,25	SOGX 120408	739,60	38504

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

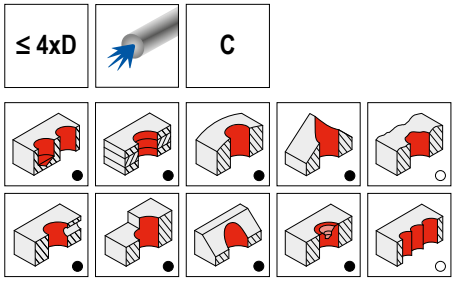

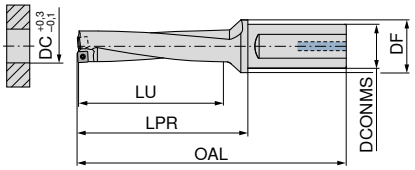

										10 874 ...
Designation	KOMET no.	**DC** mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#
KUB-P.4D.390.R.12-C40	U44 33900	**39**	40	50	252	156	184	6,25	SOGX 120408	739,60 **39004**
KUB-P.4D.395.R.12-C40	U44 33950	**39,5**	40	50	256	160	188	6,25	SOGX 120408	739,60 **39504**
KUB-P.4D.400.R.12-C40	U44 34000	**40**	40	50	256	160	188	6,25	SOGX 120408	739,60 **40004**
KUB-P.4D.405.R.12-C40	U44 34050	**40,5**	40	50	261	164	193	6,25	SOGX 120408	739,60 **40504**
KUB-P.4D.410.R.12-C40	U44 34100	**41**	40	50	261	164	193	6,25	SOGX 120408	739,60 **41004**
KUB-P.4D.415.R.12-C40	U44 34150	**41,5**	40	50	265	166	197	6,25	SOGX 120408	739,60 **41504**
KUB-P.4D.420.R.12-C40	U44 34200	**42**	40	50	265	168	197	6,25	SOGX 120408	739,60 **42004**
KUB-P.4D.425.R.13-C40	U44 34250	**42,5**	40	50	270	172	202	6,25	SOGX 130508	794,90 **42504**
KUB-P.4D.430.R.13-C40	U44 34300	**43**	40	50	270	172	202	6,25	SOGX 130508	794,90 **43004**
KUB-P.4D.435.R.13-C40	U44 34350	**43,5**	40	50	274	176	206	6,25	SOGX 130508	794,90 **43504**
KUB-P.4D.440.R.13-C40	U44 34400	**44**	40	50	274	176	206	6,25	SOGX 130508	794,90 **44004**
KUB-P.4D.445.R.13-C40	U44 34450	**44,5**	40	50	279	180	211	6,25	SOGX 130508	794,90 **44504**
KUB-P.4D.450.R.13-C40	U44 34500	**45**	40	50	279	180	211	6,25	SOGX 130508	794,90 **45004**
KUB-P.4D.455.R.13-C40	U44 34550	**45,5**	40	50	283	184	215	6,25	SOGX 130508	794,90 **45504**
KUB-P.4D.460.R.13-C40	U44 34600	**46**	40	50	283	184	215	6,25	SOGX 130508	794,90 **46004**

Screwdriver

Key D

Clamping screw

Spare parts									
DC			80 950 ... EUR Y7			80 950 ... EUR Y7			10 950 ... EUR W7/6B
14 - 16	T05 - IP	7,81	**057**					M1,8x3,8 - 05IP	2,99 **10100**
16,5 - 18				T06 - IP	13,39	**123**		M2,0x4,3 - 06IP	2,99 **10000**
18,5 - 23				T06 - IP	13,39	**123**		M2,2x5,5 - 06IP	2,99 **10700**
23,5 - 26				T08 - IP	13,16	**125**		M2,5x6,3 - 08IP	2,99 **10800**
26,5 - 30				T08 - IP	13,16	**125**		M3,0x7,6 - 08IP	2,99 **10200**
30,5 - 37				T15 - IP	15,33	**128**		M3,5x7,5 - 15IP	2,99 **10300**
37,5 - 46				T20 - IP	16,17	**129**		M4,5x10 - 20IP	2,99 **10400**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron – Indexable insert drill

Scope of supply:

Indexable Insert Drill incl. clamping screws

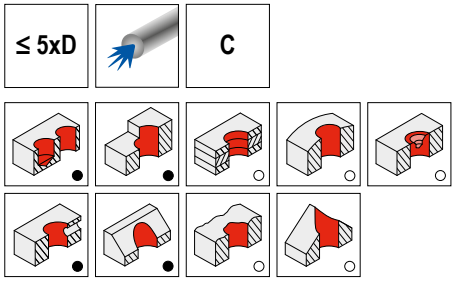

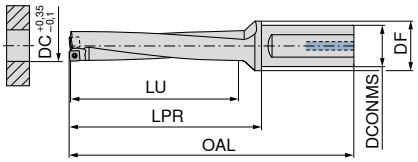

10 875 ...

Designation	KOMET no.	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#	
KUB-P.5D.140.R.04-C20	U45 01400	**14**	20	30	133	70	83	0,38	SOGX 040204	553,40	**14001**
KUB-P.5D.145.R.04-C20	U45 01450	**14,5**	20	30	139	75	89	0,38	SOGX 040204	553,40	**14501**
KUB-P.5D.150.R.04-C20	U45 01500	**15**	20	30	139	75	89	0,38	SOGX 040204	553,40	**15001**
KUB-P.5D.155.R.04-C20	U45 01550	**15,5**	20	30	146	80	96	0,38	SOGX 040204	553,40	**15501**
KUB-P.5D.160.R.04-C20	U45 01600	**16**	20	30	146	80	96	0,38	SOGX 040204	553,40	**16001**
KUB-P.5D.165.R.05-C20	U45 01650	**16,5**	20	30	152	85	102	0,62	SOGX 050204	569,70	**16501**
KUB-P.5D.170.R.05-C20	U45 01700	**17**	20	30	152	85	102	0,62	SOGX 050204	569,70	**17001**
KUB-P.5D.175.R.05-C25	U45 11750	**17,5**	25	30	163	90	107	0,62	SOGX 050204	569,70	**17502**
KUB-P.5D.180.R.05-C25	U45 11800	**18**	25	30	163	90	107	0,62	SOGX 050204	569,70	**18002**
KUB-P.5D.185.R.06-C25	U45 11850	**18,5**	25	30	169	95	113	1,01	SOGX 060206	569,70	**18502**
KUB-P.5D.190.R.06-C25	U45 11900	**19**	25	30	169	95	113	1,01	SOGX 060206	582,40	**19002**
KUB-P.5D.195.R.06-C25	U45 11950	**19,5**	25	30	174	100	118	1,01	SOGX 060206	582,40	**19502**
KUB-P.5D.200.R.06-C25	U45 12000	**20**	25	30	174	100	118	1,01	SOGX 060206	582,40	**20002**
KUB-P.5D.205.R.07-C25	U45 12050	**20,5**	25	30	180	105	124	1,01	SOGX 07T208	603,80	**20502**
KUB-P.5D.210.R.07-C25	U45 12100	**21**	25	30	180	105	124	1,01	SOGX 07T208	603,80	**21002**
KUB-P.5D.215.R.07-C25	U45 12150	**21,5**	25	30	185	110	129	1,01	SOGX 07T208	603,80	**21502**
KUB-P.5D.220.R.07-C25	U45 12200	**22**	25	30	185	110	129	1,01	SOGX 07T208	603,80	**22002**
KUB-P.5D.225.R.07-C25	U45 12250	**22,5**	25	30	191	115	135	1,01	SOGX 07T208	603,80	**22502**
KUB-P.5D.230.R.07-C25	U45 12300	**23**	25	30	191	115	135	1,01	SOGX 07T208	603,80	**23002**
KUB-P.5D.235.R.08-C32	U45 22350	**23,5**	32	39	200	120	140	1,28	SOGX 080308	623,90	**23503**
KUB-P.5D.240.R.08-C32	U45 22400	**24**	32	39	200	120	140	1,28	SOGX 080308	623,90	**24003**
KUB-P.5D.245.R.08-C32	U45 22450	**24,5**	32	39	206	125	146	1,28	SOGX 080308	623,90	**24503**
KUB-P.5D.250.R.08-C32	U45 22500	**25**	32	39	206	125	146	1,28	SOGX 080308	623,90	**25003**
KUB-P.5D.255.R.08-C32	U45 22550	**25,5**	32	39	211	130	151	1,28	SOGX 080308	623,90	**25503**
KUB-P.5D.260.R.08-C32	U45 22600	**26**	32	39	211	130	151	1,28	SOGX 080308	623,90	**26003**
KUB-P.5D.265.R.09-C32	U45 22650	**26,5**	32	39	217	135	157	2,25	SOGX 09T308	703,10	**26503**
KUB-P.5D.270.R.09-C32	U45 22700	**27**	32	39	217	135	157	2,25	SOGX 09T308	703,10	**27003**
KUB-P.5D.275.R.09-C32	U45 22750	**27,5**	32	39	222	140	162	2,25	SOGX 09T308	703,10	**27503**
KUB-P.5D.280.R.09-C32	U45 22800	**28**	32	39	222	140	162	2,25	SOGX 09T308	703,10	**28003**
KUB-P.5D.285.R.09-C32	U45 22850	**28,5**	32	39	228	145	168	2,25	SOGX 09T308	703,10	**28503**
KUB-P.5D.290.R.09-C32	U45 22900	**29**	32	39	228	145	168	2,25	SOGX 09T308	703,10	**29003**
KUB-P.5D.295.R.09-C32	U45 22950	**29,5**	32	39	233	150	173	2,25	SOGX 09T308	703,10	**29503**
KUB-P.5D.300.R.09-C32	U45 23000	**30**	32	39	233	150	173	2,25	SOGX 09T308	703,10	**30003**
KUB-P.5D.305.R.10-C40	U45 33050	**30,5**	40	50	247	155	179	2,8	SOGX 100408	752,20	**30504**
KUB-P.5D.310.R.10-C40	U45 33100	**31**	40	50	247	155	179	2,8	SOGX 100408	752,20	**31004**
KUB-P.5D.315.R.10-C40	U45 33150	**31,5**	40	50	252	160	184	2,8	SOGX 100408	752,20	**31504**
KUB-P.5D.320.R.10-C40	U45 33200	**32**	40	50	252	160	184	2,8	SOGX 100408	752,20	**32004**
KUB-P.5D.325.R.10-C40	U45 33250	**32,5**	40	50	258	165	190	2,8	SOGX 100408	752,20	**32504**
KUB-P.5D.330.R.10-C40	U45 33300	**33**	40	50	258	165	190	2,8	SOGX 100408	752,20	**33004**
KUB-P.5D.335.R.11-C40	U45 33350	**33,5**	40	50	263	170	195	2,8	SOGX 110408	773,60	**33504**
KUB-P.5D.340.R.11-C40	U45 33400	**34**	40	50	263	170	195	2,8	SOGX 110408	773,60	**34004**
KUB-P.5D.345.R.11-C40	U45 33450	**34,5**	40	50	269	175	201	2,8	SOGX 110408	773,60	**34504**
KUB-P.5D.350.R.11-C40	U45 33500	**35**	40	50	269	175	201	2,8	SOGX 110408	773,60	**35004**
KUB-P.5D.355.R.11-C40	U45 33550	**35,5**	40	50	274	180	206	2,8	SOGX 110408	773,60	**35504**
KUB-P.5D.360.R.11-C40	U45 33600	**36**	40	50	274	180	206	2,8	SOGX 110408	773,60	**36004**
KUB-P.5D.365.R.11-C40	U45 33650	**36,5**	40	50	280	185	212	2,8	SOGX 110408	773,60	**36504**
KUB-P.5D.370.R.11-C40	U45 33700	**37**	40	50	280	185	212	2,8	SOGX 110408	773,60	**37004**
KUB-P.5D.375.R.12-C40	U45 33750	**37,5**	40	50	285	190	217	6,25	SOGX 120408	794,90	**37504**
KUB-P.5D.380.R.12-C40	U45 33800	**38**	40	50	285	190	217	6,25	SOGX 120408	794,90	**38004**
KUB-P.5D.385.R.12-C40	U45 33850	**38,5**	40	50	291	195	223	6,25	SOGX 120408	794,90	**38504**

Continued on next page

KUB Pentron – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

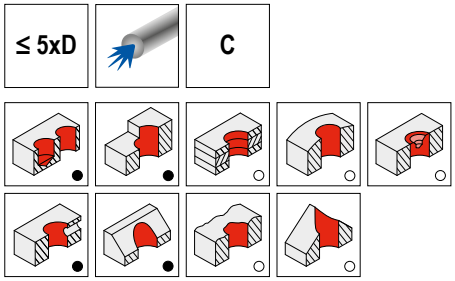

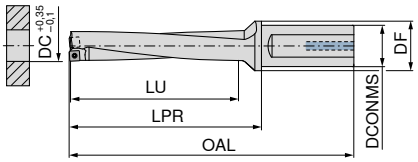

										10 875 ...
Designation	KOMET no.	**DC** mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#
KUB-P.5D.390.R.12-C40	U45 33900	**39**	40	50	291	195	223	6,25	SOGX 120408	794,90 **39004**
KUB-P.5D.395.R.12-C40	U45 33950	**39,5**	40	50	296	200	228	6,25	SOGX 120408	794,90 **39504**
KUB-P.5D.400.R.12-C40	U45 34000	**40**	40	50	296	200	228	6,25	SOGX 120408	794,90 **40004**
KUB-P.5D.405.R.12-C40	U45 34050	**40,5**	40	50	302	205	234	6,25	SOGX 120408	794,90 **40504**
KUB-P.5D.410.R.12-C40	U45 34100	**41**	40	50	302	205	234	6,25	SOGX 120408	794,90 **41004**
KUB-P.5D.415.R.12-C40	U45 34150	**41,5**	40	50	307	210	239	6,25	SOGX 120408	794,90 **41504**
KUB-P.5D.420.R.12-C40	U45 34200	**42**	40	50	307	210	239	6,25	SOGX 120408	794,90 **42004**
KUB-P.5D.425.R.13-C40	U45 34250	**42,5**	40	50	313	215	245	6,25	SOGX 130508	866,70 **42504**
KUB-P.5D.430.R.13-C40	U45 34300	**43**	40	50	313	215	245	6,25	SOGX 130508	866,70 **43004**
KUB-P.5D.435.R.13-C40	U45 34350	**43,5**	40	50	318	220	250	6,25	SOGX 130508	866,70 **43504**
KUB-P.5D.440.R.13-C40	U45 34400	**44**	40	50	318	220	250	6,25	SOGX 130508	866,70 **44004**
KUB-P.5D.445.R.13-C40	U45 34450	**44,5**	40	50	324	225	256	6,25	SOGX 130508	866,70 **44504**
KUB-P.5D.450.R.13-C40	U45 34500	**45**	40	50	324	225	256	6,25	SOGX 130508	866,70 **45004**
KUB-P.5D.455.R.13-C40	U45 34550	**45,5**	40	50	329	230	261	6,25	SOGX 130508	866,70 **45504**
KUB-P.5D.460.R.13-C40	U45 34600	**46**	40	50	329	230	261	6,25	SOGX 130508	866,70 **46004**


Screwdriver

Key D

Clamping screw

Spare parts									
			80 950 ...			**80 950 ...**			**10 950 ...**
DC			EUR Y7			EUR Y7			EUR W7/6B
14 - 16	T05 - IP	7,81	**057**					M1,8x3,8 - 05IP	2,99 **10100**
16,5 - 18				T06 - IP	13,39	**123**		M2,0x4,3 - 06IP	2,99 **10000**
18,5 - 23				T06 - IP	13,39	**123**		M2,2x5,5 - 06IP	2,99 **10700**
23,5 - 26				T08 - IP	13,16	**125**		M2,5x6,3 - 08IP	2,99 **10800**
26,5 - 30				T08 - IP	13,16	**125**		M3,0x7,6 - 08IP	2,99 **10200**
30,5 - 37				T15 - IP	15,33	**128**		M3,5x7,5 - 15IP	2,99 **10300**
37,5 - 46				T20 - IP	16,17	**129**		M4,5x10 - 20IP	2,99 **10400**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Pentron CS – basic element

▲ SZID = nominal size
▲ Tightening torque refers to the fixing screws of the cartridge

Scope of supply:

Cartridge drill incl. fixing screws
Please order cartridges and indexable inserts separately

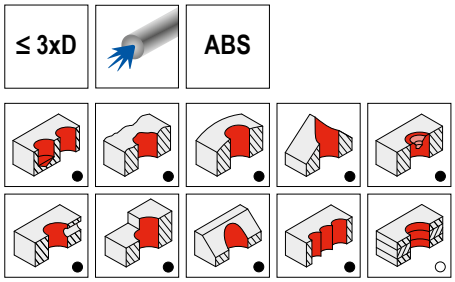

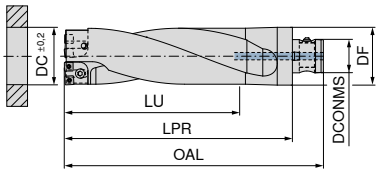

Designation	KOMET no.	DC mm	DF mm	OAL mm	DCONMS mm	LU mm	LPR mm	SZID	torque moment Nm	10 876 ... EUR 2B/6#	
KUB-P.GH-CS.1.3D.64-66.ABS80	U60 46400	64 - 66	80	314	46	198	271	1	17,3	1.241,00	64092
KUB-P.GH-CS.1.3D.67-69.ABS80	U60 46700	67 - 69	80	323	46	207	280	1	17,3	1.255,00	67092
KUB-P.GH-CS.2.3D.70-72.ABS80	U60 47000	70 - 72	80	332	46	216	289	2	17,3	1.267,00	70092
KUB-P.GH-CS.2.3D.73-75.ABS80	U60 47300	73 - 75	80	341	46	225	298	2	17,3	1.279,00	73092
KUB-P.GH-CS.3.3D.76-78.ABS80	U60 47600	76 - 78	80	350	46	234	307	3	42	1.293,00	76092
KUB-P.GH-CS.3.3D.79-81.ABS80	U60 47900	79 - 81	80	359	46	243	316	3	42	1.305,00	79092
KUB-P.GH-CS.3.3D.82-84.ABS80	U60 48200	82 - 84	80	368	46	252	325	3	42	1.318,00	82092
KUB-P.GH-CS.4.3D.85-87.ABS100	U60 58500	85 - 87	100	397	56	261	342	4	42	1.345,00	85091
KUB-P.GH-CS.4.3D.88-90.ABS100	U60 58800	88 - 90	100	406	56	270	351	4	42	1.372,00	88091
KUB-P.GH-CS.4.3D.91-93.ABS100	U60 59100	91 - 93	100	415	56	279	360	4	42	1.396,00	91091
KUB-P.GH-CS.5.3D.94-96.ABS100	U60 59400	94 - 96	100	424	56	288	369	5	42	1.422,00	94091

Clamping key – T

Fixing screw

Spare parts DC		80 397 ... EUR Y7			10 950 ... EUR W7/6B	
64 - 66	SW5	5,46	050	M6x16 - SW5	1,06	16700
67 - 69	SW5	5,46	050	M6x16 - SW5	1,06	16700
70 - 72	SW5	5,46	050	M6x16 - SW5	1,06	16700
73 - 75	SW5	5,46	050	M6x16 - SW5	1,06	16700
76 - 78	SW6	6,35	060	M8x18 - SW6	1,13	16800
79 - 81	SW6	6,35	060	M8x18 - SW6	1,13	16800
82 - 84	SW6	6,35	060	M8x18 - SW6	1,13	16800
85 - 87	SW6	6,35	060	M8x20 - SW6	1,13	16900
88 - 90	SW6	6,35	060	M8x20 - SW6	1,13	16900
91 - 93	SW6	6,35	060	M8x20 - SW6	1,13	16900
94 - 96	SW6	6,35	060	M8x20 - SW6	1,13	16900

KUB Pentron CS – internal cartridge

▲ SZID = nominal size
▲ Tightening torque refers to the clamping screws of the indexable inserts

Scope of supply:
Internal cartridge incl. clamping screws of indexable inserts

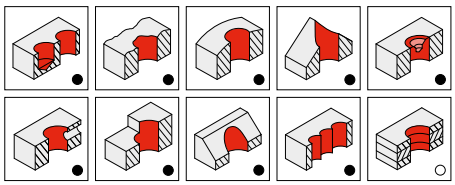



DC mm	KOMET no.	OAL mm	SZID	HF mm	torque moment Nm	Insert	10 877 ... EUR 2B/6#	
64 - 69	D60 06400	28,00	**1**	9	2,8	SOGX 100408	232,70	**16400**
70 - 75	D60 07000	30,00	**2**	10	2,8	SOGX 110408	232,70	**27000**
76 - 84	D60 07600	33,00	**3**	11	6,25	SOGX 120408	232,70	**37600**
85 - 93	D60 08501	35,34	**4**	12	6,25	SOGX 130508	232,70	**48501**
94 - 96	D60 09400	35,34	**5**	12	6,25	SOGX 130508	232,70	**59400**

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
64 - 69	T15 - IP	15,33	**128**	M3,5x7,5 - 15IP	2,99	**10300**
70 - 75	T15 - IP	15,33	**128**	M3,5x7,5 - 15IP	2,99	**10300**
76 - 84	T20 - IP	16,17	**129**	M4,5x10 - 20IP	2,99	**10400**
85 - 93	T20 - IP	16,17	**129**	M4,5x10 - 20IP	2,99	**10400**
94 - 96	T20 - IP	16,17	**129**	M4,5x10 - 20IP	2,99	**10400**

The internal cartridge and the place where the internal cartridge sits on the base body are designed to prevent the internal and external cartridges from being incorrectly installed.

Installation aid

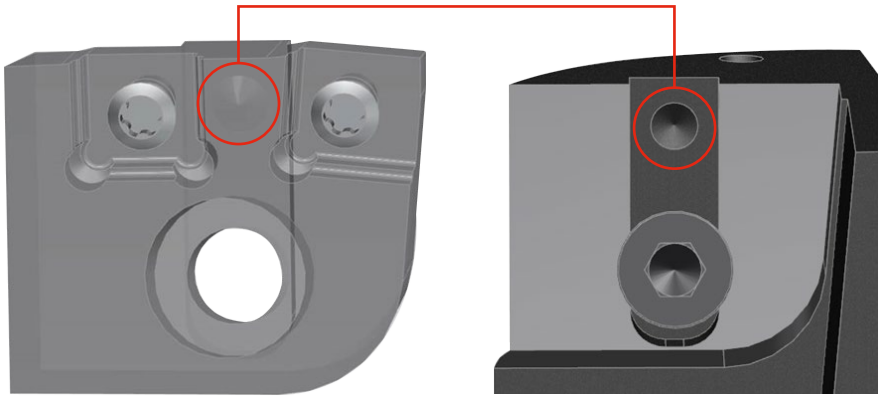

KUB Pentron CS – external cartridge

▲ SZID = nominal size
▲ Tightening torque refers to the clamping screws of the indexable inserts

Scope of supply:
External cartridge incl. clamping screws for indexable inserts

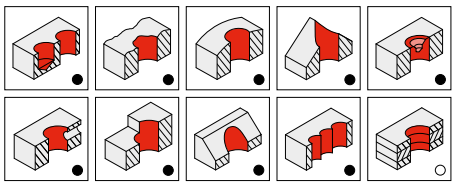



DC mm	KOMET no.	OAL mm	SZID	HF mm	torque moment Nm	Insert	10 878 ... EUR 2B/6#	
64	D60 16400	27,8	**1**	9	2,8	SOGX 100408	314,20	**16400**
65	D60 16500	27,8	**1**	9	2,8	SOGX 100408	314,20	**16500**
66	D60 16600	27,8	**1**	9	2,8	SOGX 100408	314,20	**16600**
67	D60 16700	27,8	**1**	9	2,8	SOGX 100408	314,20	**16700**
68	D60 16800	27,8	**1**	9	2,8	SOGX 100408	314,20	**16800**
69	D60 16900	27,8	**1**	9	2,8	SOGX 100408	314,20	**16900**
70	D60 17000	29,8	**2**	10	2,8	SOGX 110408	314,20	**27000**
71	D60 17100	29,8	**2**	10	2,8	SOGX 110408	314,20	**27100**
72	D60 17200	29,8	**2**	10	2,8	SOGX 110408	314,20	**27200**
73	D60 17300	29,8	**2**	10	2,8	SOGX 110408	314,20	**27300**
74	D60 17400	29,8	**2**	10	2,8	SOGX 110408	314,20	**27400**
75	D60 17500	29,8	**2**	10	2,8	SOGX 110408	314,20	**27500**
76	D60 17600	32,8	**3**	11	6,25	SOGX 120408	314,20	**37600**
77	D60 17700	32,8	**3**	11	6,25	SOGX 120408	314,20	**37700**
78	D60 17800	32,8	**3**	11	6,25	SOGX 120408	314,20	**37800**
79	D60 17900	32,8	**3**	11	6,25	SOGX 120408	314,20	**37900**
80	D60 18000	32,8	**3**	11	6,25	SOGX 120408	314,20	**38000**
81	D60 18100	32,8	**3**	11	6,25	SOGX 120408	314,20	**38100**
82	D60 18200	32,8	**3**	11	6,25	SOGX 120408	314,20	**38200**
83	D60 18300	32,8	**3**	11	6,25	SOGX 120408	314,20	**38300**
84	D60 18400	32,8	**3**	11	6,25	SOGX 120408	314,20	**38400**
85	D60 18500	35,8	**4**	12	6,25	SOGX 130508	314,20	**48500**
86	D60 18600	35,8	**4**	12	6,25	SOGX 130508	314,20	**48600**
87	D60 18700	35,8	**4**	12	6,25	SOGX 130508	314,20	**48700**
88	D60 18800	35,8	**4**	12	6,25	SOGX 130508	314,20	**48800**
89	D60 18900	35,8	**4**	12	6,25	SOGX 130508	314,20	**48900**
90	D60 19000	35,8	**4**	12	6,25	SOGX 130508	314,20	**49000**
91	D60 19100	35,8	**4**	12	6,25	SOGX 130508	314,20	**49100**
92	D60 19200	35,8	**4**	12	6,25	SOGX 130508	314,20	**49200**
93	D60 19300	35,8	**4**	12	6,25	SOGX 130508	314,20	**49300**
94	D60 19401	35,8	**5**	12	6,25	SOGX 130508	314,20	**59400**
95	D60 19501	35,8	**5**	12	6,25	SOGX 130508	314,20	**59500**
96	D60 19601	35,8	**5**	12	6,25	SOGX 130508	314,20	**59600**

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
64 - 75	T15 - IP	15,33	**128**	M3,5x7,5 - 15IP	2,99	**10300**
76 - 96	T20 - IP	16,17	**129**	M4,5x10 - 20IP	2,99	**10400**

Intermediate dimensions available on request.

SOGX

Designation	L	IC	D1	S
	mm	mm	mm	mm
SOGX 0402..	4,8	4,8	2,05	2,20
SOGX 0502..	5,5	5,5	2,30	2,40
SOGX 0602..	6,2	6,2	2,60	2,75
SOGX 07T2..	7,1	7,1	2,60	2,97
SOGX 0803..	8,0	8,0	2,85	3,40
SOGX 09T3..	8,9	8,9	3,40	3,90
SOGX 1004..	9,8	9,8	4,10	4,20
SOGX 1104..	10,9	10,9	4,10	4,50
SOGX 1204..	12,0	12,0	5,20	4,80
SOGX 1305..	13,2	13,2	5,20	5,20



3

SOGX

	-01 BK8425	-01 BK7935	-01 BK6115	-01 BK7710	-03 BK8430
	SOGX	SOGX	SOGX	SOGX	SOGX
	10 820 ...	10 820 ...	10 820 ...	10 820 ...	10 820 ...
ISO	KOMET no.	RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
040204	W80 10010.046115	0,4			20,27 40401		
040204	W80 10010.047710	0,4				20,28 90401	
040204	W80 10010.047935	0,4		20,28 50401			
040204	W80 10010.048425	0,4	20,27 30401				
040204	W80 10030.048430	0,4					20,27 00403
050204	W80 12010.046115	0,4			20,38 40501		
050204	W80 12010.047710	0,4				20,41 90501	
050204	W80 12010.047935	0,4		20,41 50501			
050204	W80 12010.048425	0,4	20,38 30501				
050204	W80 12030.048430	0,4					20,38 00503
060206	W80 18010.066115	0,6			20,53 40601		
060206	W80 18010.067710	0,6				20,56 90601	
060206	W80 18010.067935	0,6		20,56 50601			
060206	W80 18010.068425	0,6	20,53 30601				
060206	W80 18030.068430	0,6					20,53 00603
07T208	W80 20010.086115	0,8			20,64 40701		
07T208	W80 20010.087710	0,8				20,71 90701	
07T208	W80 20010.087935	0,8		20,71 50701			
07T208	W80 20010.088425	0,8	20,64 30701				
07T208	W80 20030.088430	0,8					20,64 00703
080308	W80 24010.086115	0,8			20,79 40801		
080308	W80 24010.087710	0,8				20,78 90801	
080308	W80 24010.087935	0,8		20,78 50801			
080308	W80 24010.088425	0,8	20,79 30801				
080308	W80 24030.088430	0,8					20,79 00803
09T308	W80 28010.086115	0,8			21,57 40901		
09T308	W80 28010.087710	0,8				21,56 90901	
09T308	W80 28010.087935	0,8		21,56 50901			
09T308	W80 28010.088425	0,8	21,57 30901				
09T308	W80 28030.088430	0,8					21,57 00903
100408	W80 32010.086115	0,8			22,22 41001		
100408	W80 32010.087710	0,8				22,26 91001	
100408	W80 32010.087935	0,8		22,26 51001			
100408	W80 32010.088425	0,8	22,22 31001				
100408	W80 32030.088430	0,8					22,22 01003
110408	W80 38010.086115	0,8			22,88 41101		
110408	W80 38010.087710	0,8				22,89 91101	
110408	W80 38010.087935	0,8		22,89 51101			
110408	W80 38010.088425	0,8	22,88 31101				
110408	W80 38030.088430	0,8					22,88 01103
120408	W80 42010.086115	0,8			24,06 41201		
120408	W80 42010.087710	0,8				24,03 91201	
120408	W80 42010.087935	0,8		24,03 51201			
120408	W80 42010.088425	0,8	24,06 31201				
120408	W80 42030.088430	0,8					24,06 01203
130508	W80 46010.086115	0,8			27,98 41301		
130508	W80 46010.087710	0,8				28,06 91301	
130508	W80 46010.087935	0,8		28,06 51301			
130508	W80 46010.088425	0,8	27,98 31301				
130508	W80 46030.088430	0,8					27,98 01303
P			●	●	●		●
M			●	●	●		●
K			●	●	●		●
N			○	○		●	○
S			●	●		○	●
H			○		○		○
O				○		○	

→ v_c Page 62–67

BK6115 -01 is exclusively recommended for use on the peripheral cutting edge!

SOGX

				NEW	NEW		
			-13 BK8425	-21 BK8430	-21 BK7935	-32 BK8425	-34 BK8425
			SOGX	SOGX	SOGX	SOGX	SOGX
			10 820 ...	10 820 ...	10 820 ...	10 820 ...	10 820 ...
ISO	KOMET no.	RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
040204	W80 10130.048425	0,4	20,27 30413				
040204	W80 10210.047935	0,4			20,27 50421		
040204	W80 10210.048430	0,4		20,27 00421			
040204	W80 10320.048425	0,4				22,51 30432	
040204	W80 10340.048425	0,4					22,51 30434
050204	W80 12130.048425	0,4	20,38 30513				
050204	W80 12210.047935	0,4			20,38 50521		
050204	W80 12210.048430	0,4		20,38 00521			
050204	W80 12320.048425	0,4				22,65 30532	
050204	W80 12340.048425	0,4					22,65 30534
060206	W80 18130.068425	0,6	20,53 30613				
060206	W80 18210.067935	0,6			20,53 50621		
060206	W80 18210.068430	0,6		20,53 00621			
060206	W80 18320.068425	0,6				22,81 30632	
060206	W80 18340.068425	0,6					22,81 30634
07T208	W80 20130.088425	0,8	20,64 30713				
07T208	W80 20210.087935	0,8			20,64 50721		
07T208	W80 20210.088430	0,8		20,64 00721			
07T208	W80 20320.088425	0,8				22,94 30732	
07T208	W80 20340.088425	0,8					22,94 30734
080308	W80 24130.088425	0,8	20,79 30813				
080308	W80 24210.087935	0,8			20,79 50821		
080308	W80 24210.088430	0,8		20,79 00821			
080308	W80 24320.088425	0,8				23,11 30832	
080308	W80 24340.088425	0,8					23,11 30834
09T308	W80 28130.088425	0,8	21,57 30913				
09T308	W80 28210.087935	0,8			21,57 50921		
09T308	W80 28210.088430	0,8		21,57 00921			
09T308	W80 28320.088425	0,8				23,97 30932	
09T308	W80 28340.088425	0,8					23,97 30934
100408	W80 32130.088425	0,8	22,22 31013				
100408	W80 32210.087935	0,8			22,22 51021		
100408	W80 32210.088430	0,8		22,22 01021			
100408	W80 32320.088425	0,8				24,69 31032	
100408	W80 32340.088425	0,8					24,69 31034
110408	W80 38130.088425	0,8	22,88 31113				
110408	W80 38210.087935	0,8			22,88 51121		
110408	W80 38210.088430	0,8		22,88 01121			
110408	W80 38320.088425	0,8				25,41 31132	
110408	W80 38340.088425	0,8					25,41 31134
120408	W80 42130.088425	0,8	24,06 31213				
120408	W80 42210.087935	0,8			24,06 51221		
120408	W80 42210.088430	0,8		24,06 01221			
120408	W80 42320.088425	0,8				26,72 31232	
120408	W80 42340.088425	0,8					26,72 31234
130508	W80 46130.088425	0,8	27,98 31313				
130508	W80 46210.087935	0,8			27,98 51321		
130508	W80 46210.088430	0,8		27,98 01321			
130508	W80 46320.088425	0,8				31,09 31332	
130508	W80 46340.088425	0,8					31,09 31334
P			●	●	●	●	●
M			●	●	●	●	
K			●	●	●	●	●
N			○	○	○	○	
S			●	●	●	●	
H			○	○		○	
O					○		

→ v_c Page 62–67

BK7935 -21 is exclusively recommended for use on the peripheral cutting edge!

BK8425 -34 is recommended only for KUB Pentron 2xD and 3xD (10 872 ... / 10 873 ...)

Further information on grades and chip breakers can be found on **page 85 + 86**

Further indexable inserts can be found in our online shop
cuttingtools.ceratizit.com

KUB Trigon – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

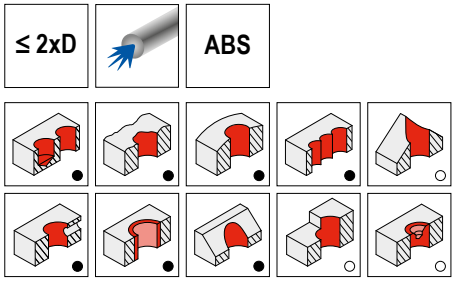



Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 892 ... EUR 2B/6#	
KUB-T.2D.140.R.03-ABS50	V30 31403	14	50	94	28	63	0,62	WOEX 030204	451,10	14095
KUB-T.2D.150.R.03-ABS50	V30 31503	15	50	96	30	65	0,62	WOEX 030204	451,10	15095
KUB-T.2D.160.R.03-ABS50	V30 31601	16	50	98	32	67	0,62	WOEX 030204	451,10	16095
KUB-T.2D.170.R.03-ABS50	V30 31701	17	50	100	34	69	0,62	WOEX 030204	451,10	17095
KUB-T.2D.180.R.03-ABS50	V30 31801	18	50	102	36	71	0,62	WOEX 030204	451,10	18095
KUB-T.2D.190.R.03-ABS50	V30 31901	19	50	104	38	73	0,62	WOEX 030204	451,10	19095
KUB-T.2D.200.R.04-ABS50	V30 32001	20	50	106	40	75	1,01	WOEX 040304	453,80	20095
KUB-T.2D.210.R.04-ABS50	V30 32101	21	50	108	42	77	1,01	WOEX 040304	453,80	21095
KUB-T.2D.220.R.04-ABS50	V30 32201	22	50	110	44	79	1,01	WOEX 040304	453,80	22095
KUB-T.2D.230.R.04-ABS50	V30 32301	23	50	112	46	81	1,01	WOEX 040304	453,80	23095
KUB-T.2D.240.R.04-ABS50	V30 32401	24	50	114	48	83	1,01	WOEX 040304	453,80	24095
KUB-T.2D.250.R.05-ABS50	V30 32501	25	50	116	50	85	1,28	WOEX 05T304	460,30	25095
KUB-T.2D.260.R.05-ABS50	V30 32601	26	50	118	52	87	1,28	WOEX 05T304	460,30	26095
KUB-T.2D.270.R.05-ABS50	V30 32701	27	50	120	54	89	1,28	WOEX 05T304	460,30	27095
KUB-T.2D.280.R.05-ABS50	V30 32801	28	50	122	56	91	1,28	WOEX 05T304	460,30	28095
KUB-T.2D.290.R.05-ABS50	V30 32901	29	50	124	58	93	1,28	WOEX 05T304	460,30	29095
KUB-T.2D.300.R.05-ABS50	V30 33001	30	50	131	60	100	1,28	WOEX 05T304	460,30	30095
KUB-T.2D.310.R.05-ABS50	V30 33101	31	50	133	62	102	1,28	WOEX 05T304	460,30	31095
KUB-T.2D.320.R.05-ABS50	V30 33201	32	50	135	64	104	1,28	WOEX 05T304	460,30	32095
KUB-T.2D.330.R.05-ABS50	V30 33301	33	50	137	66	106	1,28	WOEX 05T304	460,30	33095
KUB-T.2D.340.R.05-ABS50	V30 33401	34	50	139	68	108	1,28	WOEX 05T304	460,30	34095
KUB-T.2D.350.R.05-ABS50	V30 33501	35	50	141	70	110	1,28	WOEX 05T304	460,30	35095
KUB-T.2D.360.R.05-ABS50	V30 33601	36	50	143	72	112	1,28	WOEX 05T304	460,30	36095
KUB-T.2D.370.R.06-ABS50	V30 33701	37	50	155	74	124	2,8	WOEX 06T304	484,00	37095
KUB-T.2D.380.R.06-ABS50	V30 33801	38	50	157	76	126	2,8	WOEX 06T304	484,00	38095
KUB-T.2D.390.R.06-ABS50	V30 33901	39	50	159	78	128	2,8	WOEX 06T304	484,00	39095
KUB-T.2D.400.R.06-ABS50	V30 34001	40	50	161	80	130	2,8	WOEX 06T304	484,00	40095
KUB-T.2D.410.R.06-ABS50	V30 34101	41	50	163	82	132	2,8	WOEX 06T304	484,00	41095
KUB-T.2D.420.R.06-ABS50	V30 34201	42	50	165	84	134	2,8	WOEX 06T304	484,00	42095
KUB-T.2D.430.R.06-ABS50	V30 34301	43	50	167	86	136	2,8	WOEX 06T304	484,00	43095
KUB-T.2D.440.R.06-ABS50	V30 34401	44	50	169	88	138	2,8	WOEX 06T304	484,00	44095

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 19	T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
20 - 24	T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
25 - 36	T08 - IP	13,16	125	M2,5x7,2 - 08IP	2,99	10500
37 - 44	T10 - IP	14,91	127	M3,5x7,3 - 10IP	2,99	10600

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

▲ Tightening torque refers to the clamping screws of the indexable inserts

Scope of supply:

with indexable insert (10 897 ...) incl. fixing screw, cylindrical pin and clamping screw
with indexable insert (10 898 ...) incl. fixing screw, cylindrical pin and clamping screw

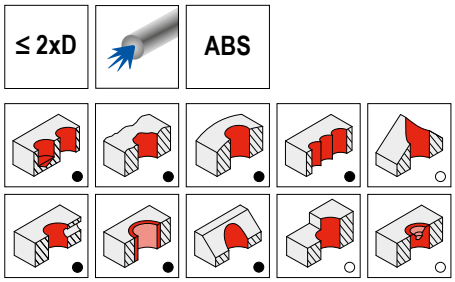



									10 892 ...
Designation	KOMET no.	**DC** mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#	
KUB-T.2D.450.R.08-ABS63	V13 34500	**45**	63	183	90	145	4,3	WOEX 080404	844,40	**45096**
KUB-T.2D.460.R.08-ABS63	V13 34600	**46**	63	185	92	147	4,3	WOEX 080404	844,40	**46096**
KUB-T.2D.470.R.08-ABS63	V13 34700	**47**	63	187	94	149	4,3	WOEX 080404	844,40	**47096**
KUB-T.2D.480.R.08-ABS63	V13 34800	**48**	63	189	96	151	4,3	WOEX 080404	844,40	**48096**
KUB-T.2D.490.R.08-ABS63	V13 34900	**49**	63	191	98	153	4,3	WOEX 080404	844,40	**49096**
KUB-T.2D.500.R.08-ABS63	V13 35000	**50**	63	193	100	155	4,3	WOEX 080404	844,40	**50096**
KUB-T.2D.510.R.08-ABS63	V13 35100	**51**	63	195	102	157	4,3	WOEX 080404	844,40	**51096**
KUB-T.2D.520.R.08-ABS63	V13 35200	**52**	63	197	104	159	4,3	WOEX 080404	844,40	**52096**
KUB-T.2D.530.R.08-ABS63	V13 35300	**53**	63	199	106	161	4,3	WOEX 080404	844,40	**53096**
KUB-T.2D.540.R.08-ABS63	V13 35400	**54**	63	201	108	163	4,3	WOEX 080404	844,40	**54096**
KUB-T.2D.550.R.10-ABS80	V14 35500	**55**	80	208	110	165	4,3	WOEX 100504	1.021,00	**55098**
KUB-T.2D.560.R.10-ABS80	V14 35600	**56**	80	210	112	167	4,3	WOEX 100504	1.021,00	**56098**
KUB-T.2D.570.R.10-ABS80	V14 35700	**57**	80	212	114	169	4,3	WOEX 100504	1.021,00	**57098**
KUB-T.2D.580.R.10-ABS80	V14 35800	**58**	80	214	116	171	4,3	WOEX 100504	1.021,00	**58098**
KUB-T.2D.590.R.10-ABS80	V14 35900	**59**	80	216	118	173	4,3	WOEX 100504	1.021,00	**59098**
KUB-T.2D.600.R.10-ABS80	V14 36000	**60**	80	218	120	175	4,3	WOEX 100504	1.021,00	**60098**
KUB-T.2D.610.R.10-ABS80	V14 36100	**61**	80	220	122	177	4,3	WOEX 100504	1.021,00	**61098**
KUB-T.2D.620.R.10-ABS80	V14 36200	**62**	80	222	124	179	4,3	WOEX 100504	1.021,00	**62098**
KUB-T.2D.630.R.10-ABS80	V14 36300	**63**	80	224	126	181	4,3	WOEX 100504	1.021,00	**63098**
KUB-T.2D.640.R.10-ABS80	V14 36400	**64**	80	226	128	183	4,3	WOEX 100504	1.021,00	**64098**
KUB-T.2D.650.R.10-ABS80	V14 36500	**65**	80	228	130	185	4,3	WOEX 100504	1.021,00	**65098**
KUB-T.2D.660.R.10-ABS80	V14 36600	**66**	80	230	132	187	4,3	WOEX 100504	1.021,00	**66098**
KUB-T.2D.670.R.10-ABS80	V14 36700	**67**	80	232	134	189	4,3	WOEX 100504	1.021,00	**67098**
KUB-T.2D.680.R.10-ABS80	V14 36800	**68**	80	234	136	191	4,3	WOEX 100504	1.021,00	**68098**
KUB-T.2D.690.R.12-ABS80	V14 36900	**69**	80	246	138	203	6,25	WOEX 120608	1.080,00	**69098**
KUB-T.2D.700.R.12-ABS80	V14 37000	**70**	80	248	140	205	6,25	WOEX 120608	1.080,00	**70098**
KUB-T.2D.710.R.12-ABS80	V14 37100	**71**	80	250	142	207	6,25	WOEX 120608	1.080,00	**71098**
KUB-T.2D.720.R.12-ABS80	V14 37200	**72**	80	252	144	209	6,25	WOEX 120608	1.080,00	**72098**
KUB-T.2D.730.R.12-ABS80	V14 37300	**73**	80	254	146	211	6,25	WOEX 120608	1.080,00	**73098**
KUB-T.2D.740.R.12-ABS80	V14 37400	**74**	80	256	148	213	6,25	WOEX 120608	1.080,00	**74098**
KUB-T.2D.750.R.12-ABS80	V14 37500	**75**	80	258	150	215	6,25	WOEX 120608	1.080,00	**75098**
KUB-T.2D.760.R.12-ABS80	V14 37600	**76**	80	260	152	217	6,25	WOEX 120608	1.080,00	**76098**
KUB-T.2D.770.R.12-ABS80	V14 37700	**77**	80	262	154	219	6,25	WOEX 120608	1.080,00	**77098**
KUB-T.2D.780.R.12-ABS80	V14 37800	**78**	80	264	156	221	6,25	WOEX 120608	1.080,00	**78098**
KUB-T.2D.790.R.12-ABS80	V14 37900	**79**	80	266	158	223	6,25	WOEX 120608	1.080,00	**79098**
KUB-T.2D.800.R.12-ABS80	V14 38000	**80**	80	268	160	225	6,25	WOEX 120608	1.080,00	**80098**
KUB-T.2D.810.R.12-ABS80	V14 38100	**81**	80	270	162	227	6,25	WOEX 120608	1.080,00	**81098**
KUB-T.2D.820.R.12-ABS80	V14 38200	**82**	80	272	164	229	6,25	WOEX 120608	1.080,00	**82098**

Key D

Clamping screw

Fixing screw

			80 950 ...			**10 950 ...**			**10 950 ...**
Spare parts			**EUR**			**EUR**			**EUR**
DC			Y7			W7/6B			W7/6B
45 - 54	T15 - IP		11,79	**120**	M4,5x9 - 15IP	2,66	**12700**	M4,5x9 - 10IP	2,99	**17000**
55 - 68	T15 - IP		11,79	**120**	M4,5x9 - 15IP	2,66	**12700**	M4,5x9 - 10IP	2,99	**17000**
69 - 82	T20 - IP		12,62	**121**	M5,5x11 - 20IP	2,71	**17400**	M5,5x13,5 - 20IP	2,99	**17100**

Cylindrical pin

Indexable insert, internal

Indexable insert, external

						10 950 ...		**10 897 ...**	**10 898 ...**
Spare parts						**EUR**		**EUR**	**EUR**
DC						W7/6B		2B/6#	2B/6#
45 - 54					Ø3	1,11	**17200**	97,98 **14800**	97,98 **14800**
55 - 68					Ø3	1,11	**17200**	106,30 **25300**	106,30 **25300**
69 - 82					Ø4	1,21	**17300**	113,10 **36000**	113,10 **36000**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

3

KUB Trigon – Indexable insert drill

▲ left-hand cutting

Scope of supply:

Indexable Insert Drill incl. clamping screws

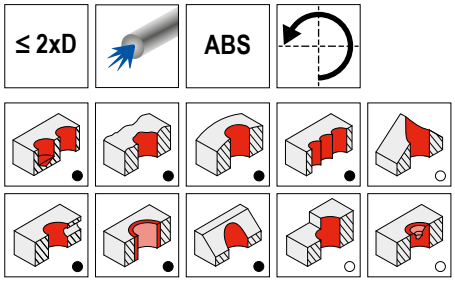



Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	11 892 ... EUR 2B/6#	
KUB-T.2D.140.L.03-ABS50	V30 21402	14	50	94	28	63	0,62	WOEX 030204	451,10	14095
KUB-T.2D.150.L.03-ABS50	V30 21502	15	50	96	30	65	0,62	WOEX 030204	451,10	15095
KUB-T.2D.160.L.03-ABS50	V30 21600	16	50	98	32	67	0,62	WOEX 030204	451,10	16095
KUB-T.2D.170.L.03-ABS50	V30 21700	17	50	100	34	69	0,62	WOEX 030204	451,10	17095
KUB-T.2D.180.L.03-ABS50	V30 21800	18	50	102	36	71	0,62	WOEX 030204	451,10	18095
KUB-T.2D.190.L.03-ABS50	V30 21900	19	50	104	38	73	0,62	WOEX 030204	451,10	19095
KUB-T.2D.200.L.04-ABS50	V30 22000	20	50	106	40	75	1,01	WOEX 040304	453,80	20095
KUB-T.2D.210.L.04-ABS50	V30 22100	21	50	108	42	77	1,01	WOEX 040304	453,80	21095
KUB-T.2D.220.L.04-ABS50	V30 22200	22	50	110	44	79	1,01	WOEX 040304	453,80	22095
KUB-T.2D.230.L.04-ABS50	V30 22300	23	50	112	46	81	1,01	WOEX 040304	453,80	23095
KUB-T.2D.240.L.04-ABS50	V30 22400	24	50	114	48	83	1,01	WOEX 040304	453,80	24095
KUB-T.2D.250.L.05-ABS50	V30 22500	25	50	116	50	85	1,28	WOEX 05T304	460,30	25095
KUB-T.2D.260.L.05-ABS50	V30 22600	26	50	118	52	87	1,28	WOEX 05T304	460,30	26095
KUB-T.2D.270.L.05-ABS50	V30 22700	27	50	120	54	89	1,28	WOEX 05T304	460,30	27095
KUB-T.2D.280.L.05-ABS50	V30 22800	28	50	122	56	91	1,28	WOEX 05T304	460,30	28095
KUB-T.2D.290.L.05-ABS50	V30 22900	29	50	124	58	93	1,28	WOEX 05T304	460,30	29095
KUB-T.2D.300.L.05-ABS50	V30 23000	30	50	131	60	100	1,28	WOEX 05T304	460,30	30095
KUB-T.2D.310.L.05-ABS50	V30 23100	31	50	133	62	102	1,28	WOEX 05T304	460,30	31095
KUB-T.2D.320.L.05-ABS50	V30 23200	32	50	135	64	104	1,28	WOEX 05T304	460,30	32095
KUB-T.2D.330.L.05-ABS50	V30 23300	33	50	137	66	106	1,28	WOEX 05T304	460,30	33095
KUB-T.2D.340.L.05-ABS50	V30 23400	34	50	139	68	108	1,28	WOEX 05T304	460,30	34095
KUB-T.2D.350.L.05-ABS50	V30 23500	35	50	141	70	110	1,28	WOEX 05T304	460,30	35095
KUB-T.2D.360.L.05-ABS50	V30 23600	36	50	143	72	112	1,28	WOEX 05T304	460,30	36095
KUB-T.2D.370.L.06-ABS50	V30 23700	37	50	155	74	124	2,8	WOEX 06T304	484,00	37095
KUB-T.2D.380.L.06-ABS50	V30 23800	38	50	157	76	126	2,8	WOEX 06T304	484,00	38095
KUB-T.2D.390.L.06-ABS50	V30 23900	39	50	159	78	128	2,8	WOEX 06T304	484,00	39095
KUB-T.2D.400.L.06-ABS50	V30 24000	40	50	161	80	130	2,8	WOEX 06T304	484,00	40095
KUB-T.2D.410.L.06-ABS50	V30 24100	41	50	163	82	132	2,8	WOEX 06T304	484,00	41095
KUB-T.2D.420.L.06-ABS50	V30 24200	42	50	165	84	134	2,8	WOEX 06T304	484,00	42095
KUB-T.2D.430.L.06-ABS50	V30 24300	43	50	167	86	136	2,8	WOEX 06T304	484,00	43095
KUB-T.2D.440.L.06-ABS50	V30 24400	44	50	169	88	138	2,8	WOEX 06T304	484,00	44095

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 19	T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
20 - 24	T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
25 - 36	T08 - IP	13,16	125	M2,5x7,2 - 08IP	2,99	10500
37 - 44	T10 - IP	14,91	127	M3,5x7,3 - 10IP	2,99	10600

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

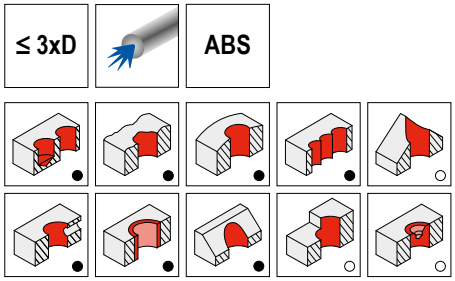

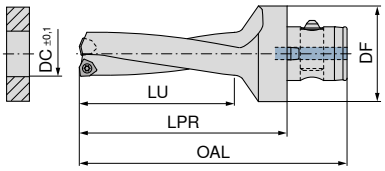

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 893 ... EUR 2B/6#	
KUB-T.3D.140.R.03-ABS50	V30 71403	14	50	108	42	77	0,62	WOEX 030204	495,90	14095
KUB-T.3D.150.R.03-ABS50	V30 71503	15	50	111	45	80	0,62	WOEX 030204	495,90	15095
KUB-T.3D.160.R.03-ABS50	V30 71601	16	50	114	48	83	0,62	WOEX 030204	495,90	16095
KUB-T.3D.170.R.03-ABS50	V30 71701	17	50	117	51	86	0,62	WOEX 030204	495,90	17095
KUB-T.3D.180.R.03-ABS50	V30 71801	18	50	120	54	89	0,62	WOEX 030204	495,90	18095
KUB-T.3D.190.R.03-ABS50	V30 71901	19	50	123	57	92	0,62	WOEX 030204	495,90	19095
KUB-T.3D.200.R.04-ABS50	V30 72001	20	50	126	60	95	1,01	WOEX 040304	505,10	20095
KUB-T.3D.210.R.04-ABS50	V30 72101	21	50	129	63	98	1,01	WOEX 040304	505,10	21095
KUB-T.3D.220.R.04-ABS50	V30 72201	22	50	132	66	101	1,01	WOEX 040304	505,10	22095
KUB-T.3D.230.R.04-ABS50	V30 72301	23	50	135	69	104	1,01	WOEX 040304	505,10	23095
KUB-T.3D.240.R.04-ABS50	V30 72401	24	50	138	72	107	1,01	WOEX 040304	505,10	24095
KUB-T.3D.250.R.05-ABS50	V30 72501	25	50	141	75	110	1,28	WOEX 05T304	516,90	25095
KUB-T.3D.260.R.05-ABS50	V30 72601	26	50	144	78	113	1,28	WOEX 05T304	516,90	26095
KUB-T.3D.270.R.05-ABS50	V30 72701	27	50	147	81	116	1,28	WOEX 05T304	516,90	27095
KUB-T.3D.280.R.05-ABS50	V30 72801	28	50	150	84	119	1,28	WOEX 05T304	516,90	28095
KUB-T.3D.290.R.05-ABS50	V30 72901	29	50	153	87	122	1,28	WOEX 05T304	516,90	29095
KUB-T.3D.300.R.05-ABS50	V30 73001	30	50	161	90	130	1,28	WOEX 05T304	516,90	30095
KUB-T.3D.310.R.05-ABS50	V30 73101	31	50	164	93	133	1,28	WOEX 05T304	516,90	31095
KUB-T.3D.320.R.05-ABS50	V30 73201	32	50	167	96	136	1,28	WOEX 05T304	516,90	32095
KUB-T.3D.330.R.05-ABS50	V30 73301	33	50	170	99	139	1,28	WOEX 05T304	516,90	33095
KUB-T.3D.340.R.05-ABS50	V30 73401	34	50	173	102	142	1,28	WOEX 05T304	516,90	34095
KUB-T.3D.350.R.05-ABS50	V30 73501	35	50	176	105	145	1,28	WOEX 05T304	516,90	35095
KUB-T.3D.360.R.05-ABS50	V30 73601	36	50	179	108	148	1,28	WOEX 05T304	516,90	36095
KUB-T.3D.370.R.06-ABS50	V30 73701	37	50	192	111	161	2,8	WOEX 06T304	561,60	37095
KUB-T.3D.380.R.06-ABS50	V30 73801	38	50	195	114	164	2,8	WOEX 06T304	561,60	38095
KUB-T.3D.390.R.06-ABS50	V30 73901	39	50	198	117	167	2,8	WOEX 06T304	561,60	39095
KUB-T.3D.400.R.06-ABS50	V30 74001	40	50	201	120	170	2,8	WOEX 06T304	561,60	40095
KUB-T.3D.410.R.06-ABS50	V30 74101	41	50	204	123	173	2,8	WOEX 06T304	561,60	41095
KUB-T.3D.420.R.06-ABS50	V30 74201	42	50	207	126	176	2,8	WOEX 06T304	561,60	42095
KUB-T.3D.430.R.06-ABS50	V30 74301	43	50	210	129	179	2,8	WOEX 06T304	561,60	43095
KUB-T.3D.440.R.06-ABS50	V30 74401	44	50	213	132	182	2,8	WOEX 06T304	561,60	44095

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 19	T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
20 - 24	T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
25 - 36	T08 - IP	13,16	125	M2,5x7,2 - 08IP	2,99	10500
37 - 44	T10 - IP	14,91	127	M3,5x7,3 - 10IP	2,99	10600

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

▲ Tightening torque refers to the clamping screws of the indexable inserts

Scope of supply:

with indexable insert (10 897 ...) incl. fixing screw, cylindrical pin and clamping screw
with indexable insert (10 898 ...) incl. fixing screw, cylindrical pin and clamping screw

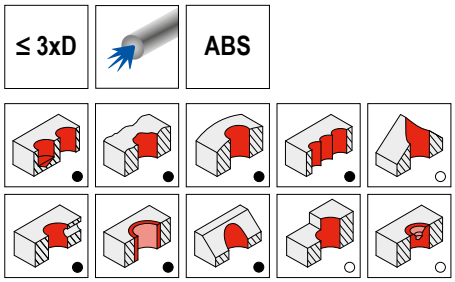

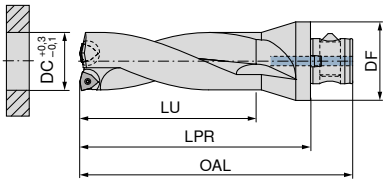

Designation	KOMET no.	DC	DF	OAL	LU	LPR	torque moment	Insert	10 893 ... EUR 2B/6#	
		mm	mm	mm	mm	mm	Nm			
KUB-T.3D.450.R.08-ABS63	V13 74500	45	63	228	135	190	4,3	WOEX 080404	945,70	45096
KUB-T.3D.460.R.08-ABS63	V13 74600	46	63	231	138	193	4,3	WOEX 080404	945,70	46096
KUB-T.3D.470.R.08-ABS63	V13 74700	47	63	234	141	196	4,3	WOEX 080404	945,70	47096
KUB-T.3D.480.R.08-ABS63	V13 74800	48	63	237	144	199	4,3	WOEX 080404	945,70	48096
KUB-T.3D.490.R.08-ABS63	V13 74900	49	63	240	147	202	4,3	WOEX 080404	945,70	49096
KUB-T.3D.500.R.08-ABS63	V13 75000	50	63	243	150	205	4,3	WOEX 080404	945,70	50096
KUB-T.3D.510.R.08-ABS63	V13 75100	51	63	246	153	208	4,3	WOEX 080404	945,70	51096
KUB-T.3D.520.R.08-ABS63	V13 75200	52	63	249	156	211	4,3	WOEX 080404	945,70	52096
KUB-T.3D.530.R.08-ABS63	V13 75300	53	63	252	159	214	4,3	WOEX 080404	945,70	53096
KUB-T.3D.540.R.08-ABS63	V13 75400	54	63	255	162	217	4,3	WOEX 080404	945,70	54096
KUB-T.3D.550.R.10-ABS80	V14 75500	55	80	263	165	220	4,3	WOEX 100504	1.138,00	55098
KUB-T.3D.560.R.10-ABS80	V14 75600	56	80	266	168	223	4,3	WOEX 100504	1.138,00	56098
KUB-T.3D.570.R.10-ABS80	V14 75700	57	80	269	171	226	4,3	WOEX 100504	1.138,00	57098
KUB-T.3D.580.R.10-ABS80	V14 75800	58	80	272	174	229	4,3	WOEX 100504	1.138,00	58098
KUB-T.3D.590.R.10-ABS80	V14 75900	59	80	275	177	232	4,3	WOEX 100504	1.138,00	59098
KUB-T.3D.600.R.10-ABS80	V14 76000	60	80	278	180	235	4,3	WOEX 100504	1.138,00	60098
KUB-T.3D.610.R.10-ABS80	V14 76100	61	80	281	183	238	4,3	WOEX 100504	1.138,00	61098
KUB-T.3D.620.R.10-ABS80	V14 76200	62	80	284	186	241	4,3	WOEX 100504	1.138,00	62098
KUB-T.3D.630.R.10-ABS80	V14 76300	63	80	287	189	244	4,3	WOEX 100504	1.138,00	63098
KUB-T.3D.640.R.10-ABS80	V14 76400	64	80	290	192	247	4,3	WOEX 100504	1.138,00	64098
KUB-T.3D.650.R.10-ABS80	V14 76500	65	80	293	195	250	4,3	WOEX 100504	1.138,00	65098
KUB-T.3D.660.R.10-ABS80	V14 76600	66	80	296	198	253	4,3	WOEX 100504	1.138,00	66098
KUB-T.3D.670.R.10-ABS80	V14 76700	67	80	299	201	256	4,3	WOEX 100504	1.138,00	67098
KUB-T.3D.680.R.10-ABS80	V14 76800	68	80	302	204	259	4,3	WOEX 100504	1.138,00	68098
KUB-T.3D.690.R.12-ABS80	V14 76900	69	80	315	207	272	6,25	WOEX 120608	1.204,00	69098
KUB-T.3D.700.R.12-ABS80	V14 77000	70	80	318	210	275	6,25	WOEX 120608	1.204,00	70098
KUB-T.3D.710.R.12-ABS80	V14 77100	71	80	321	213	278	6,25	WOEX 120608	1.204,00	71098
KUB-T.3D.720.R.12-ABS80	V14 77200	72	80	324	216	281	6,25	WOEX 120608	1.204,00	72098
KUB-T.3D.730.R.12-ABS80	V14 77300	73	80	327	219	284	6,25	WOEX 120608	1.204,00	73098
KUB-T.3D.740.R.12-ABS80	V14 77400	74	80	330	222	287	6,25	WOEX 120608	1.204,00	74098
KUB-T.3D.750.R.12-ABS80	V14 77500	75	80	333	225	290	6,25	WOEX 120608	1.204,00	75098
KUB-T.3D.760.R.12-ABS80	V14 77600	76	80	336	228	293	6,25	WOEX 120608	1.204,00	76098
KUB-T.3D.770.R.12-ABS80	V14 77700	77	80	339	231	296	6,25	WOEX 120608	1.204,00	77098
KUB-T.3D.780.R.12-ABS80	V14 77800	78	80	342	234	299	6,25	WOEX 120608	1.204,00	78098
KUB-T.3D.790.R.12-ABS80	V14 77900	79	80	345	237	302	6,25	WOEX 120608	1.204,00	79098
KUB-T.3D.800.R.12-ABS80	V14 78000	80	80	348	240	305	6,25	WOEX 120608	1.204,00	80098
KUB-T.3D.810.R.12-ABS80	V14 78100	81	80	351	243	308	6,25	WOEX 120608	1.204,00	81098
KUB-T.3D.820.R.12-ABS80	V14 78200	82	80	354	246	311	6,25	WOEX 120608	1.204,00	82098

Key D

Clamping screw

Fixing screw

Spare parts DC			80 950 ... EUR Y7			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
45 - 54	T15 - IP	11,79	120	M4,5x9 - 15IP	2,66	12700	M4,5x9 - 10IP	2,99	17000
55 - 68	T15 - IP	11,79	120	M4,5x9 - 15IP	2,66	12700	M4,5x9 - 10IP	2,99	17000
69 - 82	T20 - IP	12,62	121	M5,5x11 - 20IP	2,71	17400	M5,5x13,5 - 20IP	2,99	17100

Cylindrical pin

Indexable insert, internal

Indexable insert, external

Spare parts DC		10 950 ... EUR W7/6B		10 897 ... EUR 2B/6#		10 898 ... EUR 2B/6#	
45 - 54	Ø3	1,11	17200	97,98	14800	97,98	14800
55 - 68	Ø3	1,11	17200	106,30	25300	106,30	25300
69 - 82	Ø4	1,21	17300	113,10	36000	113,10	36000

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

3

KUB Trigon – Indexable insert drill

▲ left-hand cutting

Scope of supply:

Indexable Insert Drill incl. clamping screws

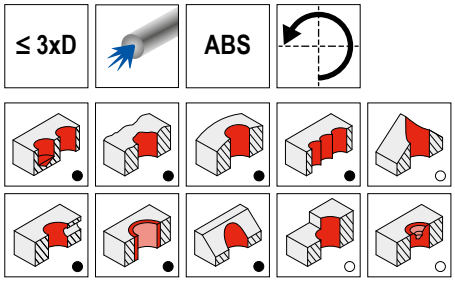

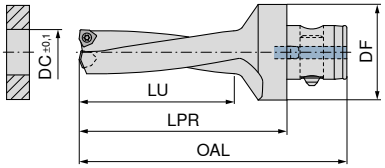

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	11 893 ... EUR 2B/6#	
KUB-T.3D.140.L.03-ABS50	V30 61402	14	50	108	42	77	0,62	WOEX 030204	495,90	14095
KUB-T.3D.150.L.03-ABS50	V30 61502	15	50	111	45	80	0,62	WOEX 030204	495,90	15095
KUB-T.3D.160.L.03-ABS50	V30 61600	16	50	114	48	83	0,62	WOEX 030204	495,90	16095
KUB-T.3D.170.L.03-ABS50	V30 61700	17	50	117	51	86	0,62	WOEX 030204	495,90	17095
KUB-T.3D.180.L.03-ABS50	V30 61800	18	50	120	54	89	0,62	WOEX 030204	495,90	18095
KUB-T.3D.190.L.03-ABS50	V30 61900	19	50	123	57	92	0,62	WOEX 030204	495,90	19095
KUB-T.3D.200.L.04-ABS50	V30 62000	20	50	126	60	95	1,01	WOEX 040304	505,10	20095
KUB-T.3D.210.L.04-ABS50	V30 62100	21	50	129	63	98	1,01	WOEX 040304	505,10	21095
KUB-T.3D.220.L.04-ABS50	V30 62200	22	50	132	66	101	1,01	WOEX 040304	505,10	22095
KUB-T.3D.230.L.04-ABS50	V30 62300	23	50	135	69	104	1,01	WOEX 040304	505,10	23095
KUB-T.3D.240.L.04-ABS50	V30 62400	24	50	138	72	107	1,01	WOEX 040304	505,10	24095
KUB-T.3D.250.L.05-ABS50	V30 62500	25	50	141	75	110	1,28	WOEX 05T304	516,90	25095
KUB-T.3D.260.L.05-ABS50	V30 62600	26	50	144	78	113	1,28	WOEX 05T304	516,90	26095
KUB-T.3D.270.L.05-ABS50	V30 62700	27	50	147	81	116	1,28	WOEX 05T304	516,90	27095
KUB-T.3D.280.L.05-ABS50	V30 62800	28	50	150	84	119	1,28	WOEX 05T304	516,90	28095
KUB-T.3D.290.L.05-ABS50	V30 62900	29	50	153	87	122	1,28	WOEX 05T304	516,90	29095
KUB-T.3D.300.L.05-ABS50	V30 63000	30	50	161	90	130	1,28	WOEX 05T304	516,90	30095
KUB-T.3D.310.L.05-ABS50	V30 63100	31	50	164	93	133	1,28	WOEX 05T304	516,90	31095
KUB-T.3D.320.L.05-ABS50	V30 63200	32	50	167	96	136	1,28	WOEX 05T304	516,90	32095
KUB-T.3D.330.L.05-ABS50	V30 63300	33	50	170	99	139	1,28	WOEX 05T304	516,90	33095
KUB-T.3D.340.L.05-ABS50	V30 63400	34	50	173	102	142	1,28	WOEX 05T304	516,90	34095
KUB-T.3D.350.L.05-ABS50	V30 63500	35	50	176	105	145	1,28	WOEX 05T304	516,90	35095
KUB-T.3D.360.L.05-ABS50	V30 63600	36	50	179	108	148	1,28	WOEX 05T304	516,90	36095
KUB-T.3D.370.L.06-ABS50	V30 63700	37	50	192	111	161	2,8	WOEX 06T304	561,60	37095
KUB-T.3D.380.L.06-ABS50	V30 63800	38	50	195	114	164	2,8	WOEX 06T304	561,60	38095
KUB-T.3D.390.L.06-ABS50	V30 63900	39	50	198	117	167	2,8	WOEX 06T304	561,60	39095
KUB-T.3D.400.L.06-ABS50	V30 64000	40	50	201	120	170	2,8	WOEX 06T304	561,60	40095
KUB-T.3D.410.L.06-ABS50	V30 64100	41	50	204	123	173	2,8	WOEX 06T304	561,60	41095
KUB-T.3D.420.L.06-ABS50	V30 64200	42	50	207	126	176	2,8	WOEX 06T304	561,60	42095
KUB-T.3D.430.L.06-ABS50	V30 64300	43	50	210	129	179	2,8	WOEX 06T304	561,60	43095
KUB-T.3D.440.L.06-ABS50	V30 64400	44	50	213	132	182	2,8	WOEX 06T304	561,60	44095

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 19	T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
20 - 24	T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
25 - 36	T08 - IP	13,16	125	M2,5x7,2 - 08IP	2,99	10500
37 - 44	T10 - IP	14,91	127	M3,5x7,3 - 10IP	2,99	10600

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

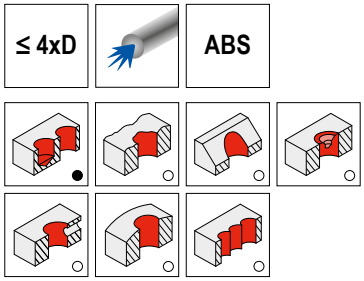

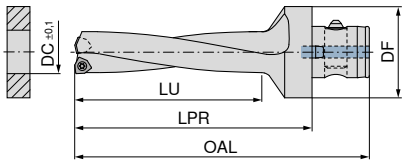

Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 894 ... EUR 2B/6#	
KUB-T.4D.140.R.03-ABS50	V30 91403	14	50	122	56	91	0,62	WOEX 030204	545,90	14095
KUB-T.4D.150.R.03-ABS50	V30 91503	15	50	126	60	95	0,62	WOEX 030204	545,90	15095
KUB-T.4D.160.R.03-ABS50	V30 91601	16	50	130	64	99	0,62	WOEX 030204	545,90	16095
KUB-T.4D.170.R.03-ABS50	V30 91701	17	50	134	68	103	0,62	WOEX 030204	545,90	17095
KUB-T.4D.180.R.03-ABS50	V30 91801	18	50	138	72	107	0,62	WOEX 030204	545,90	18095
KUB-T.4D.190.R.03-ABS50	V30 91901	19	50	142	76	111	0,62	WOEX 030204	545,90	19095
KUB-T.4D.200.R.04-ABS50	V30 92001	20	50	146	80	115	1,01	WOEX 040304	556,40	20095
KUB-T.4D.210.R.04-ABS50	V30 92101	21	50	150	84	119	1,01	WOEX 040304	556,40	21095
KUB-T.4D.220.R.04-ABS50	V30 92201	22	50	154	88	123	1,01	WOEX 040304	556,40	22095
KUB-T.4D.230.R.04-ABS50	V30 92301	23	50	158	92	127	1,01	WOEX 040304	556,40	23095
KUB-T.4D.240.R.04-ABS50	V30 92401	24	50	162	96	131	1,01	WOEX 040304	556,40	24095
KUB-T.4D.250.R.05-ABS50	V30 92501	25	50	166	100	135	1,28	WOEX 05T304	568,30	25095
KUB-T.4D.260.R.05-ABS50	V30 92601	26	50	170	104	139	1,28	WOEX 05T304	568,30	26095
KUB-T.4D.270.R.05-ABS50	V30 92701	27	50	174	108	143	1,28	WOEX 05T304	568,30	27095
KUB-T.4D.280.R.05-ABS50	V30 92801	28	50	178	112	147	1,28	WOEX 05T304	568,30	28095
KUB-T.4D.290.R.05-ABS50	V30 92901	29	50	182	116	151	1,28	WOEX 05T304	568,30	29095
KUB-T.4D.300.R.05-ABS50	V30 93001	30	50	191	120	160	1,28	WOEX 05T304	568,30	30095
KUB-T.4D.310.R.05-ABS50	V30 93101	31	50	195	124	164	1,28	WOEX 05T304	568,30	31095
KUB-T.4D.320.R.05-ABS50	V30 93201	32	50	199	128	168	1,28	WOEX 05T304	568,30	32095
KUB-T.4D.330.R.05-ABS50	V30 93301	33	50	203	132	172	1,28	WOEX 05T304	568,30	33095
KUB-T.4D.340.R.05-ABS50	V30 93401	34	50	207	136	176	1,28	WOEX 05T304	568,30	34095
KUB-T.4D.350.R.05-ABS50	V30 93501	35	50	211	140	180	1,28	WOEX 05T304	568,30	35095
KUB-T.4D.360.R.05-ABS50	V30 93601	36	50	215	144	184	1,28	WOEX 05T304	568,30	36095
KUB-T.4D.370.R.06-ABS50	V30 93701	37	50	229	148	198	2,8	WOEX 06T304	616,90	37095
KUB-T.4D.380.R.06-ABS50	V30 93801	38	50	233	152	202	2,8	WOEX 06T304	616,90	38095
KUB-T.4D.390.R.06-ABS50	V30 93901	39	50	237	156	206	2,8	WOEX 06T304	616,90	39095
KUB-T.4D.400.R.06-ABS50	V30 94001	40	50	241	160	210	2,8	WOEX 06T304	616,90	40095
KUB-T.4D.410.R.06-ABS50	V30 94101	41	50	245	164	214	2,8	WOEX 06T304	616,90	41095
KUB-T.4D.420.R.06-ABS50	V30 94201	42	50	249	168	218	2,8	WOEX 06T304	616,90	42095
KUB-T.4D.430.R.06-ABS50	V30 94301	43	50	253	172	222	2,8	WOEX 06T304	616,90	43095
KUB-T.4D.440.R.06-ABS50	V30 94401	44	50	257	176	226	2,8	WOEX 06T304	616,90	44095

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
14 - 19	T06 - IP	13,39	123	M2,0x4,3 - 06IP	2,99	10000
20 - 24	T06 - IP	13,39	123	M2,2x5,5 - 06IP	2,99	10700
25 - 36	T08 - IP	13,16	125	M2,5x7,2 - 08IP	2,99	10500
37 - 44	T10 - IP	14,91	127	M3,5x7,3 - 10IP	2,99	10600

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

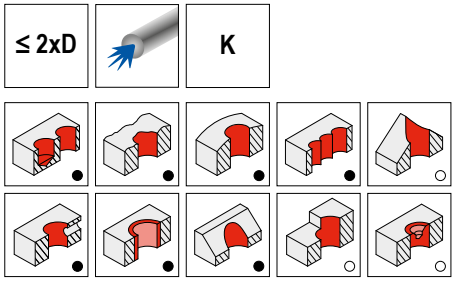

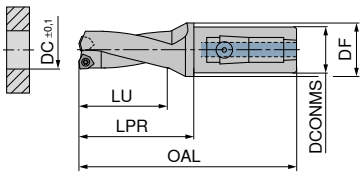

										10 892 ...	
Designation	KOMET no.	**DC**	DCONMS	DF	OAL	LU	LPR	torque moment	Insert	EUR	
		mm	mm	mm	mm	mm	mm	Nm		2B/6#	
KUB-T.2D.140.R.03-K20	V43 31404	**14**	20	30	102	28	52	0,62	WOEX 030204	382,70	**14011**
KUB-T.2D.150.R.03-K20	V43 31504	**15**	20	30	104	30	54	0,62	WOEX 030204	382,70	**15011**
KUB-T.2D.160.R.03-K20	V43 31602	**16**	20	30	106	32	56	0,62	WOEX 030204	382,70	**16011**
KUB-T.2D.170.R.03-K20	V43 31702	**17**	20	30	108	34	58	0,62	WOEX 030204	382,70	**17011**
KUB-T.2D.180.R.03-K20	V43 31802	**18**	20	30	110	36	60	0,62	WOEX 030204	382,70	**18011**
KUB-T.2D.190.R.03-K20	V43 31902	**19**	20	30	112	38	62	0,62	WOEX 030204	382,70	**19011**
KUB-T.2D.200.R.04-K25	V44 32002	**20**	25	30	120	40	64	1,01	WOEX 040304	386,80	**20012**
KUB-T.2D.210.R.04-K25	V44 32102	**21**	25	30	122	42	66	1,01	WOEX 040304	386,80	**21012**
KUB-T.2D.220.R.04-K25	V44 32202	**22**	25	30	124	44	68	1,01	WOEX 040304	386,80	**22012**
KUB-T.2D.230.R.04-K25	V44 32302	**23**	25	30	126	46	70	1,01	WOEX 040304	386,80	**23012**
KUB-T.2D.240.R.04-K25	V44 32402	**24**	25	30	128	48	72	1,01	WOEX 040304	386,80	**24012**
KUB-T.2D.250.R.05-K32	V45 32502	**25**	32	39	134	50	74	1,28	WOEX 05T304	419,70	**25013**
KUB-T.2D.260.R.05-K32	V45 32602	**26**	32	39	136	52	76	1,28	WOEX 05T304	419,70	**26013**
KUB-T.2D.270.R.05-K32	V45 32702	**27**	32	39	138	54	78	1,28	WOEX 05T304	419,70	**27013**
KUB-T.2D.280.R.05-K32	V45 32802	**28**	32	39	140	56	80	1,28	WOEX 05T304	419,70	**28013**
KUB-T.2D.290.R.05-K32	V45 32902	**29**	32	39	142	58	82	1,28	WOEX 05T304	419,70	**29013**
KUB-T.2D.300.R.05-K32	V45 33002	**30**	32	39	149	60	89	1,28	WOEX 05T304	419,70	**30013**
KUB-T.2D.310.R.05-K32	V45 33102	**31**	32	39	151	62	91	1,28	WOEX 05T304	419,70	**31013**
KUB-T.2D.320.R.05-K32	V45 33202	**32**	32	39	153	64	93	1,28	WOEX 05T304	419,70	**32013**
KUB-T.2D.330.R.05-K32	V45 33302	**33**	32	39	155	66	95	1,28	WOEX 05T304	419,70	**33013**
KUB-T.2D.340.R.05-K32	V45 33402	**34**	32	39	157	68	97	1,28	WOEX 05T304	419,70	**34013**
KUB-T.2D.350.R.05-K32	V45 33502	**35**	32	39	159	70	99	1,28	WOEX 05T304	419,70	**35013**
KUB-T.2D.360.R.05-K32	V45 33602	**36**	32	39	161	72	101	1,28	WOEX 05T304	419,70	**36013**
KUB-T.2D.370.R.06-K32	V45 33702	**37**	32	39	173	74	113	2,8	WOEX 06T304	438,00	**37013**
KUB-T.2D.380.R.06-K32	V45 33802	**38**	32	39	175	76	115	2,8	WOEX 06T304	438,00	**38013**
KUB-T.2D.390.R.06-K32	V45 33902	**39**	32	39	177	78	117	2,8	WOEX 06T304	438,00	**39013**
KUB-T.2D.400.R.06-K32	V45 34002	**40**	32	39	179	80	119	2,8	WOEX 06T304	438,00	**40013**
KUB-T.2D.410.R.06-K32	V45 34102	**41**	32	39	181	82	121	2,8	WOEX 06T304	438,00	**41013**
KUB-T.2D.420.R.06-K32	V45 34202	**42**	32	39	183	84	123	2,8	WOEX 06T304	438,00	**42013**
KUB-T.2D.430.R.06-K32	V45 34302	**43**	32	39	185	86	125	2,8	WOEX 06T304	438,00	**43013**
KUB-T.2D.440.R.06-K32	V45 34402	**44**	32	39	187	88	127	2,8	WOEX 06T304	438,00	**44013**

Key D

Clamping screw

Spare parts			80 950 ...			10 950 ...	
DC			EUR Y7			EUR W7/6B	
14 - 19	T06 - IP	13,39	**123**	M2,0x4,3 - 06IP	2,99	**10000**	
20 - 24	T06 - IP	13,39	**123**	M2,2x5,5 - 06IP	2,99	**10700**	
25 - 36	T08 - IP	13,16	**125**	M2,5x7,2 - 08IP	2,99	**10500**	
37 - 44	T10 - IP	14,91	**127**	M3,5x7,3 - 10IP	2,99	**10600**	

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

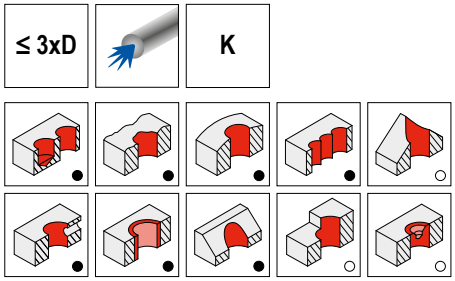

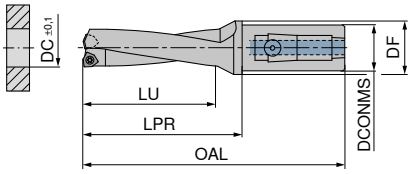

Designation	KOMET no.	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 893 ... EUR 2B/6#	
KUB-T.3D.140.R.03-K20	V43 71404	14	20	30	116	42	66	0,62	WOEX 030204	401,10	14011
KUB-T.3D.150.R.03-K20	V43 71504	15	20	30	119	45	69	0,62	WOEX 030204	401,10	15011
KUB-T.3D.160.R.03-K20	V43 71602	16	20	30	122	48	72	0,62	WOEX 030204	401,10	16011
KUB-T.3D.170.R.03-K20	V43 71702	17	20	30	125	51	75	0,62	WOEX 030204	401,10	17011
KUB-T.3D.180.R.03-K20	V43 71802	18	20	30	128	54	78	0,62	WOEX 030204	401,10	18011
KUB-T.3D.190.R.03-K20	V43 71902	19	20	30	131	57	81	0,62	WOEX 030204	401,10	19011
KUB-T.3D.200.R.04-K25	V44 72002	20	25	30	140	60	84	1,01	WOEX 040304	430,10	20012
KUB-T.3D.210.R.04-K25	V44 72102	21	25	30	143	63	87	1,01	WOEX 040304	430,10	21012
KUB-T.3D.220.R.04-K25	V44 72202	22	25	30	146	66	90	1,01	WOEX 040304	430,10	22012
KUB-T.3D.230.R.04-K25	V44 72302	23	25	30	149	69	93	1,01	WOEX 040304	430,10	23012
KUB-T.3D.240.R.04-K25	V44 72402	24	25	30	152	72	96	1,01	WOEX 040304	430,10	24012
KUB-T.3D.250.R.05-K32	V45 72502	25	32	39	159	75	99	1,28	WOEX 05T304	468,20	25013
KUB-T.3D.260.R.05-K32	V45 72602	26	32	39	162	78	102	1,28	WOEX 05T304	468,20	26013
KUB-T.3D.270.R.05-K32	V45 72702	27	32	39	165	81	105	1,28	WOEX 05T304	468,20	27013
KUB-T.3D.280.R.05-K32	V45 72802	28	32	39	168	84	108	1,28	WOEX 05T304	468,20	28013
KUB-T.3D.290.R.05-K32	V45 72902	29	32	39	171	87	111	1,28	WOEX 05T304	468,20	29013
KUB-T.3D.300.R.05-K32	V45 73002	30	32	39	179	90	119	1,28	WOEX 05T304	468,20	30013
KUB-T.3D.310.R.05-K32	V45 73102	31	32	39	182	93	122	1,28	WOEX 05T304	468,20	31013
KUB-T.3D.320.R.05-K32	V45 73202	32	32	39	185	96	125	1,28	WOEX 05T304	468,20	32013
KUB-T.3D.330.R.05-K32	V45 73302	33	32	39	188	99	128	1,28	WOEX 05T304	468,20	33013
KUB-T.3D.340.R.05-K32	V45 73402	34	32	39	191	102	131	1,28	WOEX 05T304	468,20	34013
KUB-T.3D.350.R.05-K32	V45 73502	35	32	39	194	105	134	1,28	WOEX 05T304	468,20	35013
KUB-T.3D.360.R.05-K32	V45 73602	36	32	39	197	108	137	1,28	WOEX 05T304	468,20	36013
KUB-T.3D.370.R.06-K32	V45 73702	37	32	39	210	111	150	2,8	WOEX 06T304	507,60	37013
KUB-T.3D.380.R.06-K32	V45 73802	38	32	39	213	114	153	2,8	WOEX 06T304	507,60	38013
KUB-T.3D.390.R.06-K32	V45 73902	39	32	39	216	117	156	2,8	WOEX 06T304	507,60	39013
KUB-T.3D.400.R.06-K32	V45 74002	40	32	39	219	120	159	2,8	WOEX 06T304	507,60	40013
KUB-T.3D.410.R.06-K32	V45 74102	41	32	39	222	123	162	2,8	WOEX 06T304	507,60	41013
KUB-T.3D.420.R.06-K32	V45 74202	42	32	39	225	126	165	2,8	WOEX 06T304	507,60	42013
KUB-T.3D.430.R.06-K32	V45 74302	43	32	39	228	129	168	2,8	WOEX 06T304	507,60	43013
KUB-T.3D.440.R.06-K32	V45 74402	44	32	39	231	132	171	2,8	WOEX 06T304	507,60	44013

Key D

Clamping screw

Spare parts DC	80 950 ... EUR Y7		10 950 ... EUR W7/6B	
14 - 19	T06 - IP 13,39	123	M2,0x4,3 - 06IP 2,99	10000
20 - 24	T06 - IP 13,39	123	M2,2x5,5 - 06IP 2,99	10700
25 - 36	T08 - IP 13,16	125	M2,5x7,2 - 08IP 2,99	10500
37 - 44	T10 - IP 14,91	127	M3,5x7,3 - 10IP 2,99	10600

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Trigon – Indexable insert drill

Scope of supply:
Indexable Insert Drill incl. clamping screws

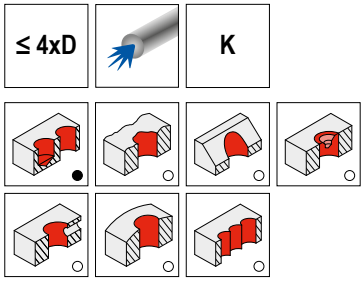

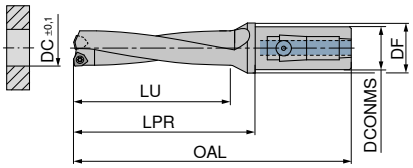

										10 894 ...
Designation	KOMET no.	**DC** mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/6#
KUB-T.4D.140.R.03-K20	V43 91404	**14**	20	30	130	56	80	0,62	WOEX 030204	440,70 **14011**
KUB-T.4D.150.R.03-K20	V43 91504	**15**	20	30	134	60	84	0,62	WOEX 030204	440,70 **15011**
KUB-T.4D.160.R.03-K20	V43 91602	**16**	20	30	138	64	88	0,62	WOEX 030204	440,70 **16011**
KUB-T.4D.170.R.03-K20	V43 91702	**17**	20	30	142	68	92	0,62	WOEX 030204	440,70 **17011**
KUB-T.4D.180.R.03-K20	V43 91802	**18**	20	30	146	72	96	0,62	WOEX 030204	440,70 **18011**
KUB-T.4D.190.R.03-K20	V43 91902	**19**	20	30	150	76	100	0,62	WOEX 030204	440,70 **19011**
KUB-T.4D.200.R.04-K25	V44 92002	**20**	25	30	160	80	104	1,01	WOEX 040304	473,50 **20012**
KUB-T.4D.210.R.04-K25	V44 92102	**21**	25	30	164	84	108	1,01	WOEX 040304	473,50 **21012**
KUB-T.4D.220.R.04-K25	V44 92202	**22**	25	30	168	88	112	1,01	WOEX 040304	473,50 **22012**
KUB-T.4D.230.R.04-K25	V44 92302	**23**	25	30	172	92	116	1,01	WOEX 040304	473,50 **23012**
KUB-T.4D.240.R.04-K25	V44 92402	**24**	25	30	176	96	120	1,01	WOEX 040304	473,50 **24012**
KUB-T.4D.250.R.05-K32	V45 92502	**25**	32	39	184	100	124	1,28	WOEX 05T304	511,70 **25013**
KUB-T.4D.260.R.05-K32	V45 92602	**26**	32	39	188	104	128	1,28	WOEX 05T304	511,70 **26013**
KUB-T.4D.270.R.05-K32	V45 92702	**27**	32	39	192	108	132	1,28	WOEX 05T304	511,70 **27013**
KUB-T.4D.280.R.05-K32	V45 92802	**28**	32	39	196	112	136	1,28	WOEX 05T304	511,70 **28013**
KUB-T.4D.290.R.05-K32	V45 92902	**29**	32	39	200	116	140	1,28	WOEX 05T304	511,70 **29013**
KUB-T.4D.300.R.05-K32	V45 93002	**30**	32	39	209	120	149	1,28	WOEX 05T304	511,70 **30013**
KUB-T.4D.310.R.05-K32	V45 93102	**31**	32	39	213	124	153	1,28	WOEX 05T304	511,70 **31013**
KUB-T.4D.320.R.05-K32	V45 93202	**32**	32	39	217	128	157	1,28	WOEX 05T304	511,70 **32013**
KUB-T.4D.330.R.05-K32	V45 93302	**33**	32	39	221	132	161	1,28	WOEX 05T304	511,70 **33013**
KUB-T.4D.340.R.05-K32	V45 93402	**34**	32	39	225	136	165	1,28	WOEX 05T304	511,70 **34013**
KUB-T.4D.350.R.05-K32	V45 93502	**35**	32	39	229	140	169	1,28	WOEX 05T304	511,70 **35013**

Key D

Clamping screw

Spare parts							
			80 950 ...			**10 950 ...**	
DC		EUR Y7				EUR W7/6B	
14 - 19	T06 - IP	13,39	**123**		M2,0x4,3 - 06IP	2,99	**10000**
20 - 24	T06 - IP	13,39	**123**		M2,2x5,5 - 06IP	2,99	**10700**
25 - 35	T08 - IP	13,16	**125**		M2,5x7,2 - 08IP	2,99	**10500**

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

KUB Centron – basic element

▲ KLG = Coupling Size



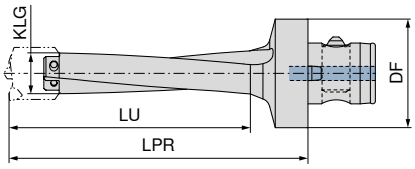

3

10 864 ...

Designation	KOMET no.	DF mm	LU mm	LPR mm	KLG	EUR 2B/6#	
KUB-C.GH.4D.190-ABS50	V47 20201	50	113	145	19	509,10	19095
KUB-C.GH.4D.250-ABS50	V47 20261	50	130	160	25	509,10	25095
KUB-C.GH.4D.320-ABS50	V47 20331	50	160	195	32	509,10	32095
KUB-C.GH.4D.385-ABS63	V47 20401	63	185	235	38,5	761,70	38596
KUB-C.GH.4D.445-ABS80	V47 20461	80	215	280	44,5	761,70	44598
KUB-C.GH.4D.535-ABS80	V47 20551	80	260	325	53,5	945,70	53598
KUB-C.GH.4D.635-ABS80	V47 20651	80	295	375	63,5	1.059,00	63598
KUB-C.GH.4D.705-ABS100	V47 20721	100	325	405	70,5	1.129,00	70591



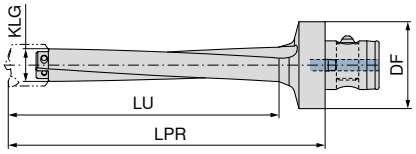

10 866 ...

Designation	KOMET no.	DF mm	LU mm	LPR mm	KLG	EUR 2B/6#	
KUB-C.GH.6D.190-ABS50	V47 40201	50	150	185	19	606,30	19095
KUB-C.GH.6D.250-ABS50	V47 40261	50	175	210	25	606,30	25095
KUB-C.GH.6D.320-ABS50	V47 40331	50	215	255	32	606,30	32095
KUB-C.GH.6D.385-ABS63	V47 40401	63	260	310	38,5	832,60	38596
KUB-C.GH.6D.445-ABS80	V47 40461	80	310	375	44,5	832,60	44598
KUB-C.GH.6D.535-ABS80	V47 40551	80	370	435	53,5	1.129,00	53598
KUB-C.GH.6D.635-ABS80	V47 40651	80	420	500	63,5	1.189,00	63598
KUB-C.GH.6D.705-ABS100	V47 40721	100	460	540	70,5	1.265,00	70591



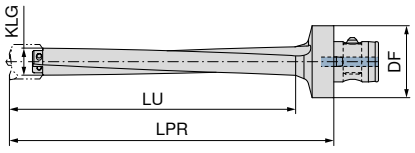

10 869 ...

Designation	KOMET no.	DF mm	LU mm	LPR mm	KLG	EUR 2B/6#	
KUB-C.GH.9D.190-ABS50	V47 60201	50	200	235	19	669,60	19095
KUB-C.GH.9D.250-ABS50	V47 60261	50	230	260	25	669,60	25095
KUB-C.GH.9D.320-ABS50	V47 60331	50	290	330	32	669,60	32095
KUB-C.GH.9D.385-ABS63	V47 60401	63	340	390	38,5	906,30	38596
KUB-C.GH.9D.445-ABS80	V47 60461	80	415	480	44,5	906,30	44598
KUB-C.GH.9D.535-ABS80	V47 60551	80	495	560	53,5	1.256,00	53598
KUB-C.GH.9D.635-ABS80	V47 60651	80	560	640	63,5	1.357,00	63598
KUB-C.GH.9D.705-ABS100	V47 60721	100	610	690	70,5	1.424,00	70591

For correct assembly, please observe the operating instructions provided.

KUB Centron – drill bit Ø 20–64 mm

▲ The pre-assembled drill bit is ready to use
▲ The indexable inserts and centring tip must be professionally assembled
▲ Tightening torque refers to the clamping screws of the indexable inserts
▲ KLG = Coupling size

Scope of supply:
Drill bit incl. screws, guide pads and shim set
Order centring tip and indexable inserts separately





10 860 ...

Designation	KOMET no.	DC mm	OAL mm	LPR mm	SD mm	BD mm	SDL mm	DCONMS mm	DCONWS mm	KLG	torque moment Nm	Insert	EUR 2B/6#	
KUB-C.BK.200.R.03-19	V46 50201	**20**	36,5	23	2,25	19,0	1,00	19,0	5	**19**	0,62	WOEX 030204	447,40	**20000**
KUB-C.BK.210.R.03-19	V46 50211	**21**	36,5	23	2,25	20,0	1,00	19,0	5	**19**	0,62	WOEX 030204	447,40	**21000**
KUB-C.BK.220.R.03-19	V46 50221	**22**	36,5	23	2,25	21,0	1,00	19,0	5	**19**	0,62	WOEX 030204	447,40	**22000**
KUB-C.BK.230.R.03-19	V46 50231	**23**	36,5	23	2,25	22,0	1,00	19,0	5	**19**	0,62	WOEX 030204	447,40	**23000**
KUB-C.BK.240.R.03-19	V46 50241	**24**	36,5	23	2,25	23,0	1,00	19,0	5	**19**	0,62	WOEX 030204	447,40	**24000**
KUB-C.BK.250.R.03-19	V46 50251	**25**	36,5	23	2,25	24,0	1,00	19,0	5	**19**	0,62	WOEX 030204	447,40	**25000**
KUB-C.BK.260.R.04-25	V46 50260	**26**	38,0	23	2,65	25,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**26000**
KUB-C.BK.270.R.04-25	V46 50270	**27**	38,0	23	2,65	26,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**27000**
KUB-C.BK.280.R.04-25	V46 50280	**28**	38,0	23	2,65	27,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**28000**
KUB-C.BK.290.R.04-25	V46 50290	**29**	38,0	23	2,65	28,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**29000**
KUB-C.BK.300.R.04-25	V46 50300	**30**	38,0	23	2,65	29,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**30000**
KUB-C.BK.310.R.04-25	V46 50310	**31**	38,0	23	2,65	30,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**31000**
KUB-C.BK.320.R.04-25	V46 50320	**32**	38,0	23	2,65	31,0	1,10	25,0	6	**25**	1,01	WOEX 040304	511,70	**32000**
KUB-C.BK.330.R.05-32	V46 50330	**33**	39,2	23	2,65	32,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**33000**
KUB-C.BK.340.R.05-32	V46 50340	**34**	39,2	23	2,65	33,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**34000**
KUB-C.BK.350.R.05-32	V46 50350	**35**	39,2	23	2,65	34,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**35000**
KUB-C.BK.360.R.05-32	V46 50360	**36**	39,2	23	2,65	35,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**36000**
KUB-C.BK.370.R.05-32	V46 50370	**37**	39,2	23	2,65	36,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**37000**
KUB-C.BK.380.R.05-32	V46 50380	**38**	39,2	23	2,65	37,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**38000**
KUB-C.BK.390.R.05-32	V46 50390	**39**	39,2	23	2,65	38,0	1,10	32,0	6	**32**	1,28	WOEX 05T304	662,90	**39000**
KUB-C.BK.400.R.05-38,5	V46 50400	**40**	43,1	25	3,38	38,5	1,25	38,5	8	**38,5**	1,28	WOEX 05T304	681,40	**40000**
KUB-C.BK.410.R.05-38,5	V46 50410	**41**	43,1	25	3,38	39,5	1,25	38,5	8	**38,5**	1,28	WOEX 05T304	681,40	**41000**
KUB-C.BK.420.R.05-38,5	V46 50420	**42**	43,1	25	3,38	40,5	1,09	38,5	8	**38,5**	1,28	WOEX 05T304	681,40	**42000**
KUB-C.BK.430.R.05-38,5	V46 50430	**43**	43,1	25	3,38	41,5	1,09	38,5	8	**38,5**	1,28	WOEX 05T304	681,40	**43000**
KUB-C.BK.440.R.05-38,5	V46 50440	**44**	43,1	25	3,38	42,5	1,25	38,5	8	**38,5**	1,28	WOEX 05T304	681,40	**44000**
KUB-C.BK.450.R.05-38,5	V46 50450	**45**	43,1	25	3,38	43,5	1,25	38,5	8	**38,5**	1,28	WOEX 05T304	681,40	**45000**
KUB-C.BK.460.R.06-44,5	V46 50460	**46**	47,0	25	3,86	44,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**46000**
KUB-C.BK.470.R.06-44,5	V46 50470	**47**	47,0	25	3,86	45,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**47000**
KUB-C.BK.480.R.06-44,5	V46 50480	**48**	47,0	25	3,86	46,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**48000**
KUB-C.BK.490.R.06-44,5	V46 50490	**49**	47,0	25	3,86	47,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**49000**
KUB-C.BK.500.R.06-44,5	V46 50500	**50**	47,0	25	3,86	48,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**50000**
KUB-C.BK.510.R.06-44,5	V46 50510	**51**	47,0	25	3,86	49,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**51000**
KUB-C.BK.520.R.06-44,5	V46 50520	**52**	47,0	25	3,86	50,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	730,00	**52000**
KUB-C.BK.530.R.06-44,5	V46 50530	**53**	47,0	25	3,86	51,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	756,30	**53000**
KUB-C.BK.540.R.06-44,5	V46 50540	**54**	47,0	25	3,86	52,5	1,25	44,5	10	**44,5**	2,8	WOEX 06T304	756,30	**54000**
KUB-C.BK.550.R.08-53,5	V46 50550	**55**	52,0	30	3,86	53,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**55000**
KUB-C.BK.560.R.08-53,5	V46 50560	**56**	52,0	30	3,86	54,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**56000**
KUB-C.BK.570.R.08-53,5	V46 50570	**57**	52,0	30	3,86	55,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**57000**
KUB-C.BK.580.R.08-53,5	V46 50580	**58**	52,0	30	3,86	56,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**58000**
KUB-C.BK.590.R.08-53,5	V46 50590	**59**	52,0	30	3,86	57,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**59000**
KUB-C.BK.600.R.08-53,5	V46 50600	**60**	52,0	30	3,86	58,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**60000**
KUB-C.BK.610.R.08-53,5	V46 50610	**61**	52,0	30	3,86	59,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**61000**
KUB-C.BK.620.R.08-53,5	V46 50620	**62**	52,0	30	3,86	60,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**62000**
KUB-C.BK.630.R.08-53,5	V46 50630	**63**	52,0	30	3,86	61,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**63000**
KUB-C.BK.640.R.08-53,5	V46 50640	**64**	52,0	30	3,86	62,5	1,25	53,5	10	**53,5**	6,25	WOEX 080404	782,70	**64000**

Guide pad clamping screw

Indexable insert clamping screw

Guide pad

Shim set

Spare parts DC		10 950 ... EUR W7/6B			10 950 ... EUR W7/6B		10 950 ... EUR W7/6B		10 950 ... EUR W7/6B	
20	M2,5x4,2 - 8IP - 1,28Nm	2,99	11900	M2,0x4,3 - 06IP	2,99	10000	74,47	14600	23,28	15200
21 - 22	M2,5x4,2 - 8IP - 1,28Nm	2,99	11900	M2,0x4,3 - 06IP	2,99	10000	74,47	14600	23,28	15200
23 - 25	M2,5x4,5 - 8IP - 1,28Nm	3,43	11700	M2,0x4,3 - 06IP	2,99	10000	65,43	14700	23,28	15200
26 - 29	M2,5x4,5 - 8IP - 1,28Nm	3,43	11700	M2,2x5,5 - 06IP	2,99	10700	65,43	14700	23,28	15200
30 - 32	M2,5x4,5 - 8IP - 1,28Nm	3,43	11700	M2,2x5,5 - 06IP	2,99	10700	65,43	14800	23,28	15200
33 - 36	M2,5x4,5 - 8IP - 1,28Nm	3,43	11700	M2,5x7,2 - 08IP	2,99	10500	65,43	14800	23,28	15200
37 - 39	M2,5x4,5 - 8IP - 1,28Nm	3,43	11700	M2,5x7,2 - 08IP	2,99	10500	65,43	14900	23,28	15200
40 - 45	M2,5x4,5 - 8IP - 1,28Nm	3,43	11700	M2,5x7,2 - 08IP	2,99	10500	65,43	14900	23,28	15200
46 - 54	M3,5x5,0 - 8IP - 2,25Nm	2,99	11800	M3,5x7,3 - 10IP	2,99	10600	77,72	15000	23,28	15300
55 - 64	M3,5x5,0 - 8IP - 2,25Nm	2,99	11800	M4,5x9 - 15IP	2,66	12700	77,72	15100	23,28	15300

Basic element clamping screw

Centring tip clamping screw

Spare parts DC		10 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
20	M2,5x6,4 - 08IP - 1,28Nm	2,99	12400	M4x6 - SW2 - 1,5Nm	3,43	12800
21 - 22	M2,5x6,4 - 08IP - 1,28Nm	2,99	12400	M4x8 - SW2 - 1,5Nm	3,43	12900
23 - 25	M2,5x6,4 - 08IP - 1,28Nm	2,99	12400	M4x8 - SW2 - 1,5Nm	3,43	12900
26 - 29	M3x7,4 - 08IP - 2,25Nm	2,99	12500	M5x10 - SW2,5 - 2,5Nm	3,43	13000
30 - 32	M3x7,4 - 08IP - 2,25Nm	2,99	12500	M5x10 - SW2,5 - 2,5Nm	3,43	13000
33 - 36	M4x8,9 - 15IP - 4,3Nm	2,99	12000	M5x12 - SW2,5 - 2,5Nm	3,43	13100
37 - 39	M4x8,9 - 15IP - 4,3Nm	2,99	12000	M5x12 - SW2,5 - 2,5Nm	3,43	13100
40 - 45	M4,5x10,5 - 20IP - 6,25Nm	2,99	12600	M6x12 - SW3 - 5Nm	3,43	13200
46 - 54	M5x11,5 - 20IP - 6,25Nm	2,99	12100	M8x16 - SW4 - 8Nm	3,43	13300
55 - 64	M5,5x14 - 20IP - 6,25Nm	2,99	12200	M8x16 - SW4 - 8Nm	3,43	13300

Drill bit Ø 20–64 mm exploded view

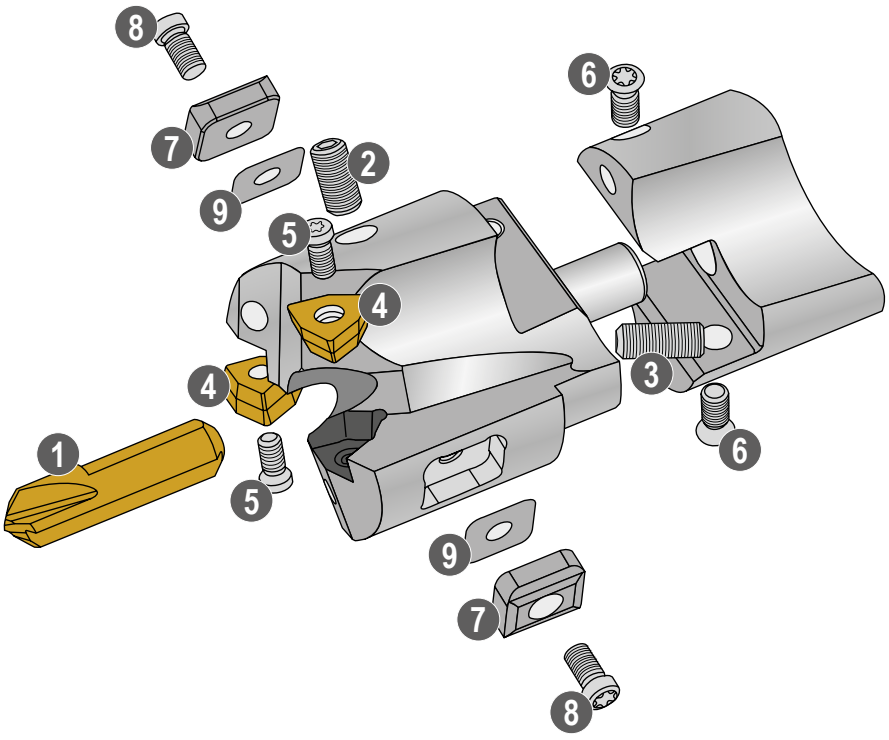

1. Centring tip
2. Clamping screw for centring tip
3. Adjusting screw for centring tip
4. Indexable Insert
5. Clamping screw for indexable insert
6. Clamping screw for basic element
7. Guide pad
8. Clamping screw for guide pad
9. Shim set for aligning the guide pads

For correct assembly, please observe the operating instructions provided.

KUB Centron – drill bit Ø 65–81 mm

- ▲ The pre-assembled drill bit is ready to use
- ▲ The indexable inserts and centring tip must be professionally assembled
- ▲ Tightening torque refers to the clamping screws of the indexable inserts
- ▲ Adjustable diameter of outer indexable insert seat
- ▲ KLG = Coupling size

Scope of supply:

Drill bit incl. screws, indexable insert, carbide bolt, key, grub screw and copper disc
Order centring tip and indexable inserts separately





Designation	KOMET no.	DC	OAL	LPR	SD	BD	SDL	DCONMS	DCONWS	KLG	torque moment	Insert	10 860 ... EUR 2B/6#	
		mm	mm	mm	mm	mm	mm	mm	mm		Nm			
KUB-C.BK.650.R.05-63,5	V46 50650	**65**	63,0	35	4,67	63,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**65000**
KUB-C.BK.660.R.05-63,5	V46 50660	**66**	63,0	35	4,67	64,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**66000**
KUB-C.BK.670.R.05-63,5	V46 50670	**67**	63,0	35	4,67	65,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**67000**
KUB-C.BK.680.R.05-63,5	V46 50680	**68**	63,0	35	4,67	66,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**68000**
KUB-C.BK.690.R.05-63,5	V46 50690	**69**	63,0	35	4,67	67,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**69000**
KUB-C.BK.700.R.05-63,5	V46 50700	**70**	63,0	35	4,67	68,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**70000**
KUB-C.BK.710.R.05-63,5	V46 50710	**71**	63,0	35	4,67	69,5	1,45	63,5	12	**63,5**	1,28	WOEX 05T304	926,10	**71000**
KUB-C.BK.720.R.05-70,5	V46 50720	**72**	80,5	50	4,67	70,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**72000**
KUB-C.BK.730.R.05-70,5	V46 50730	**73**	80,5	50	4,67	71,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**73000**
KUB-C.BK.740.R.05-70,5	V46 50740	**74**	80,5	50	4,67	72,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**74000**
KUB-C.BK.750.R.05-70,5	V46 50750	**75**	80,5	50	4,67	73,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**75000**
KUB-C.BK.760.R.05-70,5	V46 50760	**76**	80,5	50	4,67	74,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**76000**
KUB-C.BK.770.R.05-70,5	V46 50770	**77**	80,5	50	4,67	75,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**77000**
KUB-C.BK.780.R.05-70,5	V46 50780	**78**	80,5	50	4,67	76,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**78000**
KUB-C.BK.790.R.05-70,5	V46 50790	**79**	80,5	50	4,67	77,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**79000**
KUB-C.BK.800.R.05-70,5	V46 50800	**80**	80,5	50	4,67	78,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**80000**
KUB-C.BK.810.R.05-70,5	V46 50810	**81**	80,5	50	4,67	79,5	1,45	70,5	12	**70,5**	1,28	WOEX 05T304	1.086,00	**81000**

Grub screw

Copper disc

Indexable insert fixing screw

Indexable insert fixing screw

Spare parts DC		10 950 ... EUR W7/6B			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
65 - 71	M6x8 - SW3	1,11	**11300**	Ø4,5x1,5	2,15	**11400**	M4,5x11,5 - T15	2,99	**13500**			
72 - 75	M6x8 - SW3	1,11	**11300**	Ø4,5x1,5	2,15	**11400**	M5x12 - SW2,5	1,11	**11000**	M2,5x6 - 08IP - 1,28Nm	2,99	**11600**
76 - 78	M6x8 - SW3	1,11	**11300**	Ø4,5x1,5	2,15	**11400**	M5x12 - SW2,5	1,11	**11000**	M2,5x6 - 08IP - 1,28Nm	2,99	**11600**
79 - 81	M6x8 - SW3	1,11	**11300**	Ø4,5x1,5	2,15	**11400**	M5x12 - SW2,5	1,11	**11000**	M2,5x6 - 08IP - 1,28Nm	2,99	**11600**

Indexable insert seat

Indexable insert seat

Indexable insert seat

Cylindrical pin

Indexable insert adjusting screw

Basic element clamping screw

Spare parts DC		10 950 ... EUR 2B/6#			10 950 ... EUR 2B/6#			10 950 ... EUR 2B/6#			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
65 - 71		207,80	**13800**										M4x8 - SW2	1,11	**11100**	M6x16 - 20IP - 6,25Nm	3,09	**12300**
72 - 75		331,50	**13900**		92,46	**13700**		92,46	**13600**		1,21	**11500**	M4x10 - SW2	1,11	**11200**	M6x16 - 20IP - 6,25Nm	3,09	**12300**
76 - 78		331,50	**14000**		92,46	**13700**		92,46	**13600**		1,21	**11500**	M4x10 - SW2	1,11	**11200**	M6x16 - 20IP - 6,25Nm	3,09	**12300**
79 - 81		331,50	**14100**		92,46	**13700**		92,46	**13600**		1,21	**11500**	M4x10 - SW2	1,11	**11200**	M6x16 - 20IP - 6,25Nm	3,09	**12300**

Carbide bolt key

Carbide bolt

Indexable insert clamping screw

Centring tip clamping screw

Spare parts DC		10 950 ... EUR W7/6B			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
65 - 71		31,16	**15500**	M12x1	145,80	**15400**	M2,5x7,2 - 08IP	2,99	**10500**	M10x20 - SW5 - 16Nm	3,43	**13400**
72 - 75		31,16	**15500**	M12x1	145,80	**15400**	M2,5x7,2 - 08IP	2,99	**10500**	M10x20 - SW5 - 16Nm	3,43	**13400**
76 - 78		31,16	**15500**	M12x1	145,80	**15400**	M2,5x7,2 - 08IP	2,99	**10500**	M10x20 - SW5 - 16Nm	3,43	**13400**
79 - 81		31,16	**15500**	M12x1	145,80	**15400**	M2,5x7,2 - 08IP	2,99	**10500**	M10x20 - SW5 - 16Nm	3,43	**13400**

Drill bit Ø 65–81 mm exploded view

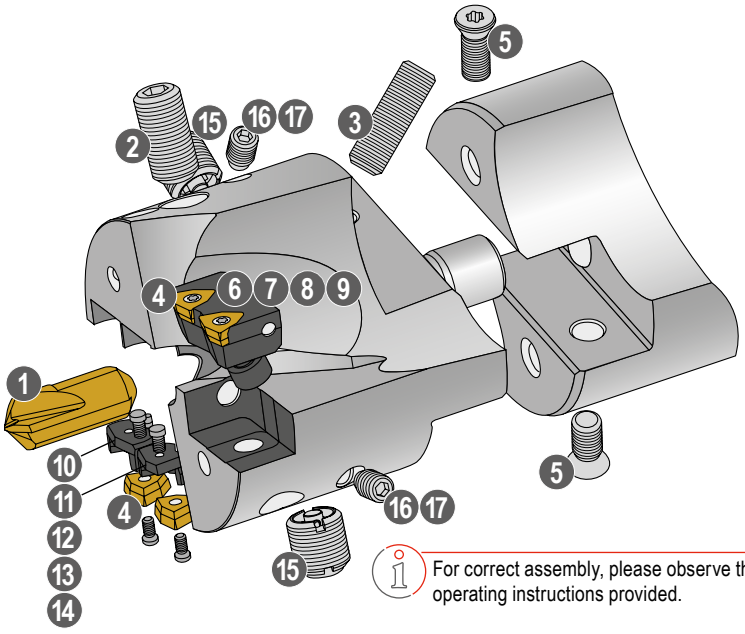

For correct assembly, please observe the operating instructions provided.

1 Centring tip
2 Clamping screw for centring tip
3 Adjusting screw for centring tip
4 Indexable Insert
5 Clamping screw for basic element
6 Indexable insert seat
7 Fixing screw for indexable insert
8 Adjusting screw for indexable insert
9 Clamping screw for indexable insert
10 Indexable insert seat
11 Indexable insert seat
12 Fixing screw for indexable insert
13 Cylindrical pin for indexable insert
14 Clamping screw for indexable insert
15 Carbide bolt
16 Grub screw
17 Copper disc

KUB Centron – centring tip



					ZP		ZP		ZP		
					TiAlN/TiN		TiN		TiAlN		
					SIG 120° Solid carbide		SIG 120° HSS		SIG 120° HSS		
					10 863 ...		**10 862 ...**		**10 862 ...**		
DC mm	KOMET no.	OAL mm	LU mm	DCONMS mm	EUR T2/9D		EUR T2/9D		EUR T2/9D		
5	V95 10012.0089	23,0	2,25	5			39,68	**00500**			
5	V95 10012.0090	23,0	2,25	5					39,68	**10500**	
5	V95 10310.8450	23,0	2,25	5	75,77	**20500**					
6	V95 10022.0089	23,0	2,65	6			39,68	**00600**			
6	V95 10022.0090	23,0	2,65	6					39,68	**10600**	
6	V95 10320.8450	23,0	2,65	6	75,77	**20600**					
8	V95 10032.0089	27,0	3,38	8			42,04	**00800**			
8	V95 10032.0090	27,0	3,38	8					42,04	**10800**	
8	V95 10330.8450	27,0	3,38	8	93,46	**20800**					
10	V95 10042.0089	28,0	3,86	10			48,83	**01000**			
10	V95 10042.0090	28,0	3,86	10					48,83	**11000**	
10	V95 10340.8450	28,0	3,86	10	101,50	**21000**					
12	V95 10050.0089	30,8	4,67	12			61,80	**01200**			
12	V95 10050.0090	30,8	4,67	12					61,80	**11200**	
P					●		●				
M					●				●		
K					●				●		
N					●		●				
S					○				●		
H											
O					○		○				

→ v_c Page 72+73

▲ The cutting data of the KUB Centron depends on the centring tip and not on the indexable inserts. Please select the cutting data of the centring tip.
▲ Article No. 10 863 ... is only suitable up to drilling depth 6xD.

WOEX

Designation	L mm	IC mm	S mm	D1 mm
WOEX 0302..	3,2	5,00	2,30	2,30
WOEX 0403..	4,1	6,35	3,18	2,55
WOEX 05T3..	5,3	8,00	3,80	2,85
WOEX 06T3..	6,6	10,00	3,80	4,05
WOEX 0804..	7,9	12,00	4,80	4,90
WOEX 1005..	9,9	15,00	5,30	4,90
WOEX 1206..	11,6	17,60	6,00	5,95



WOEX

			-01 BK8425	-01 BK7935	-01 BK6115	-01 BK7615	-01 BK62
			WOEX	WOEX	WOEX	WOEX	WOEX
			10 821 ...	10 821 ...	10 821 ...	10 821 ...	10 821 ...
ISO	KOMET no.	RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
030204	W29 10010.046115	0,4			21,58 40301		
030204	W29 10010.0462	0,4					15,51 20301
030204	W29 10010.047615	0,4				24,90 05301	
030204	W29 10010.047935	0,4		15,75 50301			
030204	W29 10010.048425	0,4	14,91 30301				
040304	W29 18010.046115	0,4			21,75 40401		
040304	W29 18010.0462	0,4					16,32 20401
040304	W29 18010.047615	0,4				25,01 05401	
040304	W29 18010.047935	0,4		16,72 50401			
040304	W29 18010.048425	0,4	15,84 30401				
05T304	W29 24010.046115	0,4			22,17 40501		
05T304	W29 24010.0462	0,4					16,47 20501
05T304	W29 24010.047615	0,4				26,10 05501	
05T304	W29 24010.047935	0,4		16,94 50501			
05T304	W29 24010.048425	0,4	16,28 30501				
06T304	W29 34010.046115	0,4			23,23 40601		
06T304	W29 34010.0462	0,4					18,61 20601
06T304	W29 34010.047615	0,4				28,02 05601	
06T304	W29 34010.047935	0,4		19,25 50601			
06T304	W29 34010.048425	0,4	18,19 30601				
080404	W29 42010.046115	0,4			28,70 40801		
080404	W29 42010.0462	0,4					23,23 20801
080404	W29 42010.047615	0,4				34,17 05801	
080404	W29 42010.047935	0,4		24,26 50801			
080404	W29 42010.048425	0,4	22,95 30801				
100504	W29 50010.046115	0,4			33,89 41001		
100504	W29 50010.0462	0,4					32,39 21001
100504	W29 50010.047615	0,4				38,15 06001	
100504	W29 50010.047935	0,4		33,02 51001			
100504	W29 50010.048425	0,4	31,31 31001				
120608	W29 58010.086115	0,8			42,50 41201		
120608	W29 58010.0862	0,8					41,42 28201
120608	W29 58010.087615	0,8				47,03 08201	
120608	W29 58010.087935	0,8		38,42 53201			
120608	W29 58010.088425	0,8	36,35 31201				
P			●	●	●		
M			●	●	●		
K			●	●	●	●	●
N			○	○			
S			●	●			
H			○		○		○
O							

→ v_c Page 68

BK6115 -01 / BK8425 -03 are exclusively recommended for use on the peripheral cutting edge!

Further indexable inserts can be found in our online shop
cuttingtools.ceratizit.com

WOEX

Designation	L	IC	S	D1
	mm	mm	mm	mm
WOEX 0302..	3,2	5,00	2,30	2,30
WOEX 0403..	4,1	6,35	3,18	2,55
WOEX 05T3..	5,3	8,00	3,80	2,85
WOEX 06T3..	6,6	10,00	3,80	4,05
WOEX 0804..	7,9	12,00	4,80	4,90
WOEX 1005..	9,9	15,00	5,30	4,90
WOEX 1206..	11,6	17,60	6,00	5,95



3

WOEX

			-03 BK8425	-11 BK77	-11 BK7710	-13 BK8425	-13 BK79
			WOEX	WOEX	WOEX	WOEX	WOEX
			10 821 ...	10 821 ...	10 821 ...	10 821 ...	10 821 ...
ISO	KOMET no.	RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
030204	W29 10110.047710	0,4			16,28 90311		
030204	W29 10130.0479	0,4					18,04 15313
030204	W29 10130.048425	0,4				18,04 30313	
030204	W29 10110.0477	0,4		15,51 80311			
030204	W29 10030.048425	0,4	15,31 30303				
040304	W29 18110.047710	0,4			17,22 90411		
040304	W29 18130.0479	0,4					18,19 15413
040304	W29 18130.048425	0,4				18,19 30413	
040304	W29 18110.0477	0,4		16,32 80411			
040304	W29 18030.048425	0,4	16,28 30403				
05T304	W29 24110.047710	0,4			17,37 90511		
05T304	W29 24130.0479	0,4					18,59 15513
05T304	W29 24130.048425	0,4				18,59 30513	
05T304	W29 24110.0477	0,4		16,47 80511			
05T304	W29 24030.048425	0,4	22,95 30503				
06T304	W29 34110.047710	0,4			19,54 90611		
06T304	W29 34130.0479	0,4					20,50 15613
06T304	W29 34130.048425	0,4				20,50 30613	
06T304	W29 34110.0477	0,4		18,46 80611			
06T304	W29 34030.048425	0,4	24,05 30603				
080404	W29 42110.047710	0,4			24,90 90811		
080404	W29 42130.0479	0,4					26,24 15813
080404	W29 42130.048425	0,4				25,98 30813	
080404	W29 42110.0477	0,4		23,65 80811			
080404	W29 42030.048425	0,4	30,47 30803				
100504	W29 50110.047710	0,4			34,17 91011		
100504	W29 50130.0479	0,4					36,09 16013
100504	W29 50130.048425	0,4				36,09 31013	
100504	W29 50110.0477	0,4		32,67 81011			
100504	W29 50030.048425	0,4	30,47 31003				
120608	W29 58130.088425	0,8				41,70 38213	
120608	W29 58130.0879	0,8					41,70 16213
120608	W29 58030.088425	0,8	33,76 33203				
P			●			●	●
M			●			●	●
K			●			●	●
N			○		●	○	○
S			●	●	○	●	
H			○	○	○	○	
O				○	○		

→ v_c Page 68

BK6115 -01 / BK8425 -03 are exclusively recommended for use on the peripheral cutting edge!

Further information on grades and chip breakers can be found on **page 85 + 86**

MaxiDrill 900 – Indexable insert drill

Scope of supply:

Indexable Insert Drill including clamping screws and key

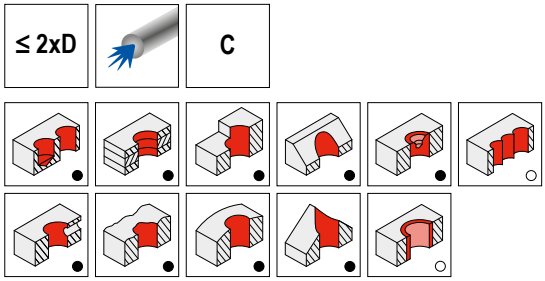

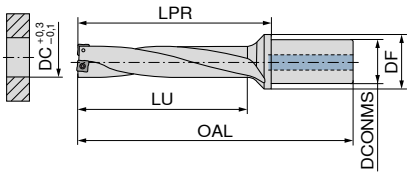

10 852 ...

Designation	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/41	
MD900.2D.120.R.03-C20	**12**	20	28	90	24	40	0,4	SONT 031804	308,30	**120**
MD900.2D.125.R.03-C20	**12,5**	20	28	91	25	41	0,4	SONT 031804	308,30	**125**
MD900.2D.130.R.03-C20	**13**	20	28	92	26	42	0,4	SONT 031804	308,30	**130**
MD900.2D.135.R.03-C20	**13,5**	20	28	93	27	43	0,4	SONT 031804	308,30	**135**
MD900.2D.140.R.04-C20	**14**	20	30	96	28	46	0,7	SONT 042105	328,20	**140**
MD900.2D.145.R.04-C20	**14,5**	20	30	97	29	47	0,7	SONT 042105	328,20	**145**
MD900.2D.150.R.04-C20	**15**	20	30	98	30	48	0,7	SONT 042105	328,20	**150**
MD900.2D.155.R.04-C20	**15,5**	20	30	99	31	49	0,7	SONT 042105	328,20	**155**
MD900.2D.160.R.05-C20	**16**	20	30	100	32	50	0,7	SONT 052306	328,20	**160**
MD900.2D.165.R.05-C20	**16,5**	20	30	101	33	51	0,7	SONT 052306	328,20	**165**
MD900.2D.170.R.05-C20	**17**	20	30	102	34	52	0,7	SONT 052306	349,30	**170**
MD900.2D.175.R.05-C20	**17,5**	20	30	103	35	53	0,7	SONT 052306	349,30	**175**
MD900.2D.180.R.06-C25	**18**	25	32	111	36	55	1	SONT 062506	349,30	**180**
MD900.2D.185.R.06-C25	**18,5**	25	32	112	37	56	1	SONT 062506	349,30	**185**
MD900.2D.190.R.06-C25	**19**	25	32	113	38	57	1	SONT 062506	375,40	**190**
MD900.2D.195.R.06-C25	**19,5**	25	32	114	39	58	1	SONT 062506	375,40	**195**
MD900.2D.200.R.06-C25	**20**	25	32	115	40	59	1	SONT 062506	375,40	**200**
MD900.2D.205.R.06-C25	**20,5**	25	32	116	41	60	1	SONT 062506	375,40	**205**
MD900.2D.210.R.07-C25	**21**	25	32	118	42	62	1	SONT 072907	375,40	**210**
MD900.2D.220.R.07-C25	**22**	25	32	120	44	64	1	SONT 072907	375,40	**220**
MD900.2D.230.R.07-C25	**23**	25	32	122	46	66	1	SONT 072907	387,20	**230**
MD900.2D.240.R.08-C32	**24**	32	40	132	48	72	1,2	SONT 083308	387,20	**240**
MD900.2D.250.R.08-C32	**25**	32	40	134	50	74	1,2	SONT 083308	387,20	**250**
MD900.2D.260.R.08-C32	**26**	32	40	136	52	76	1,2	SONT 083308	428,60	**260**
MD900.2D.270.R.08-C32	**27**	32	40	138	54	78	1,2	SONT 083308	428,60	**270**
MD900.2D.280.R.09-C32	**28**	32	40	140	56	80	2,2	SONT 093808	428,60	**280**
MD900.2D.290.R.09-C32	**29**	32	40	142	58	82	2,2	SONT 093808	428,60	**290**
MD900.2D.300.R.09-C32	**30**	32	40	144	60	84	2,2	SONT 093808	428,60	**300**
MD900.2D.310.R.09-C32	**31**	32	40	146	62	86	2,2	SONT 093808	464,90	**310**
MD900.2D.320.R.09-C32	**32**	32	40	148	64	88	2,2	SONT 093808	464,90	**320**
MD900.2D.330.R.10-C40	**33**	40	50	163	66	93	3,2	SONT 104408	464,90	**330**
MD900.2D.340.R.10-C40	**34**	40	50	165	68	95	3,2	SONT 104408	464,90	**340**
MD900.2D.350.R.10-C40	**35**	40	50	167	70	97	3,2	SONT 104408	475,40	**350**
MD900.2D.360.R.10-C40	**36**	40	50	169	72	99	3,2	SONT 104408	475,40	**360**
MD900.2D.370.R.12-C40	**37**	40	56	174	74	104	3,2	SONT 124810	490,80	**370**
MD900.2D.380.R.12-C40	**38**	40	56	176	76	106	3,2	SONT 124810	490,80	**380**
MD900.2D.390.R.12-C40	**39**	40	56	178	78	108	3,2	SONT 124810	490,80	**390**
MD900.2D.400.R.12-C40	**40**	40	56	180	80	110	3,2	SONT 124810	490,80	**400**
MD900.2D.410.R.12-C40	**41**	40	56	182	82	112	3,2	SONT 124810	490,80	**410**
MD900.2D.420.R.13-C40	**42**	40	60	187	84	117	5	SONT 135012	515,60	**420**
MD900.2D.430.R.13-C40	**43**	40	60	189	86	119	5	SONT 135012	515,60	**430**
MD900.2D.440.R.13-C40	**44**	40	60	191	88	121	5	SONT 135012	515,60	**440**

Continued on next page

MaxiDrill 900 – Indexable insert drill

Scope of supply:
Indexable Insert Drill including clamping screws and key

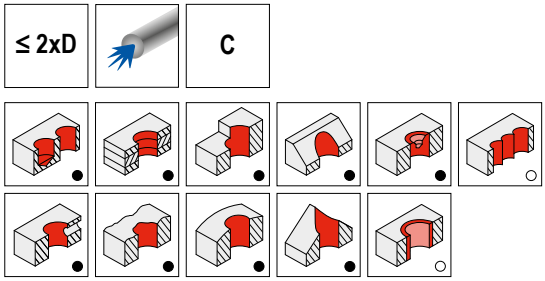

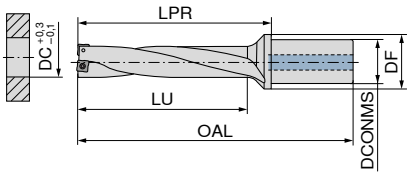

Designation	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 852 ... EUR 2B/41	
MD900.2D.450.R.13-C40	45	40	60	193	90	123	5	SONT 135012	515,60	450
MD900.2D.460.R.13-C40	46	40	60	195	92	125	5	SONT 135012	515,60	460
MD900.2D.470.R.15-C40	47	40	60	198	94	128	5	SONT 155312	541,70	470
MD900.2D.480.R.15-C40	48	40	60	200	96	130	5	SONT 155312	541,70	480
MD900.2D.490.R.15-C40	49	40	60	202	98	132	5	SONT 155312	584,50	490
MD900.2D.500.R.15-C40	50	40	60	204	100	134	5	SONT 155312	584,50	500
MD900.2D.520.R.15-C40	51	40	60	206	102	136	5	SONT 155312	600,10	510
MD900.2D.510.R.15-C40	52	40	60	208	104	138	5	SONT 155312	600,10	520
MD900.2D.530.R.15-C40	53	40	60	210	106	140	5	SONT 155312	600,10	530
MD900.2D.540.R.15-C40	54	40	60	212	108	142	5	SONT 155312	600,10	540
MD900.2D.550.R.17-C40	55	40	60	215	110	145	5	SONT 175612	600,10	550
MD900.2D.560.R.17-C40	56	40	60	217	112	147	5	SONT 175612	622,20	560
MD900.2D.570.R.17-C40	57	40	60	219	114	149	5	SONT 175612	622,20	570
MD900.2D.580.R.17-C40	58	40	60	221	116	151	5	SONT 175612	622,20	580
MD900.2D.590.R.17-C40	59	40	60	223	118	153	5	SONT 175612	622,20	590
MD900.2D.600.R.17-C40	60	40	62	225	120	155	5	SONT 175612	622,20	600
MD900.2D.610.R.17-C40	61	40	62	227	122	157	5	SONT 175612	622,20	610
MD900.2D.620.R.17-C40	62	40	64	229	124	159	5	SONT 175612	622,20	620
MD900.2D.630.R.17-C40	63	40	64	231	126	161	5	SONT 175612	622,20	630

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
12 - 13,5	T06 - IP	13,39	123	M1,8x3,6 - IP	4,84	862
14 - 17,5	T06 - IP	13,39	123	M2x4,3 - IP	4,31	863
18 - 23	T07 - IP	13,18	124	M2,2x5 - IP	4,19	856
24 - 27	T08 - IP	13,16	125	M2,5x6 - IP	5,38	857
28 - 32	T09 - IP	14,50	126	M3x7 - IP	4,14	819
33 - 41	T15 - IP	15,33	128	M3,5x8,6 - IP	4,14	859
42 - 63	T20 - IP	16,17	129	M4,5x10,5 - IP	4,14	864

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

MaxiDrill 900 – Indexable insert drill

Scope of supply:

Indexable Insert Drill including clamping screws and key

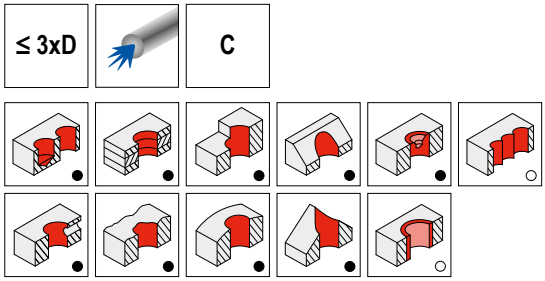

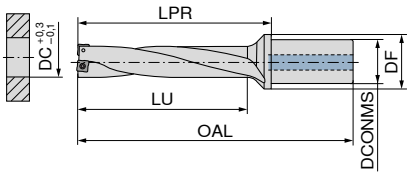

10 853 ...

Designation	DC	DCONMS	DF	OAL	LU	LPR	torque moment	Insert	EUR	
	mm	mm	mm	mm	mm	mm	Nm		2B/41	
MD900.3D.120.R.03-C20	12	20	28	102	36,0	52	0,4	SONT 031804	328,50	120
MD900.3D.125.R.03-C20	12,5	20	28	104	37,5	54	0,4	SONT 031804	328,50	125
MD900.3D.130.R.03-C20	13	20	28	105	39,0	55	0,4	SONT 031804	328,50	130
MD900.3D.135.R.03-C20	13,5	20	28	107	40,5	57	0,4	SONT 031804	328,50	135
MD900.3D.140.R.04-C20	14	20	30	109	42,0	59	0,7	SONT 042105	345,90	140
MD900.3D.145.R.04-C20	14,5	20	30	111	44,0	61	0,7	SONT 042105	345,90	145
MD900.3D.150.R.04-C20	15	20	30	112	45,0	62	0,7	SONT 042105	345,90	150
MD900.3D.155.R.04-C20	15,5	20	30	114	47,0	64	0,7	SONT 042105	354,10	155
MD900.3D.160.R.05-C20	16	20	30	115	48,0	65	0,7	SONT 052306	354,10	160
MD900.3D.165.R.05-C20	16,5	20	30	117	50,0	67	0,7	SONT 052306	354,10	165
MD900.3D.170.R.05-C20	17	20	30	118	51,0	68	0,7	SONT 052306	367,80	170
MD900.3D.175.R.05-C20	17,5	20	30	120	53,0	70	0,7	SONT 052306	367,80	175
MD900.3D.180.R.06-C25	18	25	32	128	54,0	72	1	SONT 062506	367,80	180
MD900.3D.185.R.06-C25	18,5	25	32	130	56,0	74	1	SONT 062506	367,80	185
MD900.3D.190.R.06-C25	19	25	32	131	57,0	75	1	SONT 062506	395,10	190
MD900.3D.195.R.06-C25	19,5	25	32	133	59,0	77	1	SONT 062506	395,10	195
MD900.3D.200.R.06-C25	20	25	32	134	60,0	78	1	SONT 062506	395,10	200
MD900.3D.205.R.06-C25	20,5	25	32	136	62,0	80	1	SONT 062506	395,10	205
MD900.3D.210.R.07-C25	21	25	32	138	63,0	82	1	SONT 072907	395,10	210
MD900.3D.215.R.07-C25	21,5	25	32	140	65,0	84	1	SONT 072907	395,10	215
MD900.3D.220.R.07-C25	22	25	32	141	66,0	85	1	SONT 072907	395,10	220
MD900.3D.225.R.07-C25	22,5	25	32	143	68,0	87	1	SONT 072907	407,40	225
MD900.3D.230.R.07-C25	23	25	32	144	69,0	88	1	SONT 072907	407,40	230
MD900.3D.235.R.07-C25	23,5	25	32	146	71,0	90	1	SONT 072907	407,40	235
MD900.3D.240.R.08-C32	24	32	40	155	72,0	95	1,2	SONT 083308	407,40	240
MD900.3D.245.R.08-C32	24,5	32	40	157	74,0	97	1,2	SONT 083308	407,40	245
MD900.3D.250.R.08-C32	25	32	40	158	75,0	98	1,2	SONT 083308	407,40	250
MD900.3D.255.R.08-C32	25,5	32	40	160	77,0	100	1,2	SONT 083308	407,40	255
MD900.3D.260.R.08-C32	26	32	40	161	78,0	101	1,2	SONT 083308	451,10	260
MD900.3D.265.R.08-C32	26,5	32	40	163	80,0	103	1,2	SONT 083308	451,10	265
MD900.3D.270.R.08-C32	27	32	40	164	81,0	104	1,2	SONT 083308	451,10	270
MD900.3D.275.R.08-C32	27,5	32	40	166	83,0	106	1,2	SONT 083308	451,10	275
MD900.3D.280.R.09-C32	28	32	40	167	84,0	107	2,2	SONT 093808	451,10	280
MD900.3D.285.R.09-C32	28,5	32	40	169	86,0	109	2,2	SONT 093808	451,10	285
MD900.3D.290.R.09-C32	29	32	40	170	87,0	110	2,2	SONT 093808	451,10	290
MD900.3D.295.R.09-C32	29,5	32	40	172	89,0	112	2,2	SONT 093808	451,10	295
MD900.3D.300.R.09-C32	30	32	40	173	90,0	113	2,2	SONT 093808	451,10	300
MD900.3D.305.R.09-C32	30,5	32	40	175	92,0	115	2,2	SONT 093808	451,10	305
MD900.3D.310.R.09-C32	31	32	40	176	93,0	116	2,2	SONT 093808	489,40	310
MD900.3D.315.R.09-C32	31,5	32	40	178	95,0	118	2,2	SONT 093808	489,40	315
MD900.3D.320.R.09-C32	32	32	40	179	96,0	119	2,2	SONT 093808	489,40	320
MD900.3D.325.R.10-C40	32,5	40	50	192	98,0	124	3,2	SONT 104408	489,40	325
MD900.3D.330.R.10-C40	33	40	50	193	99,0	125	3,2	SONT 104408	489,40	330
MD900.3D.335.R.10-C40	33,5	40	50	195	101,0	127	3,2	SONT 104408	489,40	335
MD900.3D.340.R.10-C40	34	40	50	196	102,0	128	3,2	SONT 104408	489,40	340
MD900.3D.345.R.10-C40	34,5	40	50	198	104,0	130	3,2	SONT 104408	489,40	345
MD900.3D.350.R.10-C40	35	40	50	199	105,0	131	3,2	SONT 104408	500,40	350
MD900.3D.355.R.10-C40	35,5	40	50	201	107,0	133	3,2	SONT 104408	500,40	355
MD900.3D.360.R.10-C40	36	40	50	202	108,0	134	3,2	SONT 104408	500,40	360
MD900.3D.365.R.10-C40	36,5	40	50	204	110,0	136	3,2	SONT 104408	500,40	365
MD900.3D.370.R.12-C40	37	40	56	211	111,0	141	3,2	SONT 124810	516,80	370
MD900.3D.380.R.12-C40	38	40	56	214	114,0	144	3,2	SONT 124810	516,80	380

Continued on next page

MaxiDrill 900 – Indexable insert drill

Scope of supply:
Indexable Insert Drill including clamping screws and key

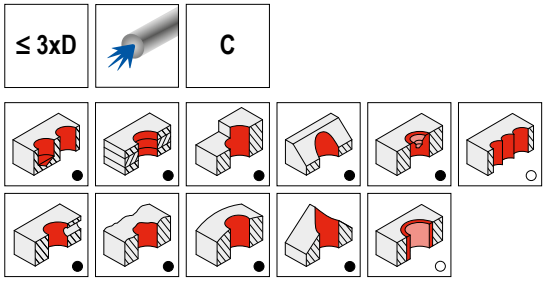

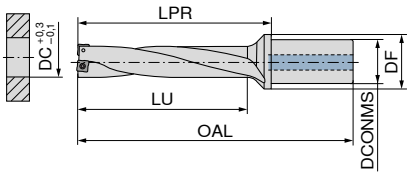

Designation	DC	DCONMS	DF	OAL	LU	LPR	torque moment	Insert	10 853 ... EUR 2B/41	
	mm	mm	mm	mm	mm	mm	Nm			
MD900.3D.390.R.12-C40	39	40	56	217	117,0	147	3,2	SONT 124810	516,80	390
MD900.3D.400.R.12-C40	40	40	56	220	120,0	150	3,2	SONT 124810	516,80	400
MD900.3D.410.R.12-C40	41	40	56	223	123,0	153	3,2	SONT 124810	516,80	410
MD900.3D.420.R.13-C40	42	40	60	229	126,0	159	5	SONT 135012	542,70	420
MD900.3D.430.R.13-C40	43	40	60	232	129,0	162	5	SONT 135012	542,70	430
MD900.3D.440.R.13-C40	44	40	60	235	132,0	165	5	SONT 135012	542,70	440
MD900.3D.450.R.13-C40	45	40	60	238	135,0	168	5	SONT 135012	542,70	450
MD900.3D.460.R.13-C40	46	40	60	241	138,0	171	5	SONT 135012	542,70	460
MD900.3D.470.R.15-C40	47	40	60	245	141,0	175	5	SONT 155312	570,00	470
MD900.3D.480.R.15-C40	48	40	60	248	144,0	178	5	SONT 155312	570,00	480
MD900.3D.490.R.15-C40	49	40	60	251	147,0	181	5	SONT 155312	615,20	490
MD900.3D.500.R.15-C40	50	40	60	254	150,0	184	5	SONT 155312	615,20	500
MD900.3D.510.R.15-C40	51	40	60	257	153,0	187	5	SONT 155312	631,60	510
MD900.3D.520.R.15-C40	52	40	60	260	156,0	190	5	SONT 155312	631,60	520
MD900.3D.530.R.15-C40	53	40	60	263	159,0	193	5	SONT 155312	631,60	530
MD900.3D.540.R.15-C40	54	40	60	266	162,0	196	5	SONT 155312	631,60	540
MD900.3D.550.R.17-C40	55	40	60	270	165,0	200	5	SONT 175612	631,60	550
MD900.3D.560.R.17-C40	56	40	60	273	168,0	203	5	SONT 175612	654,80	560
MD900.3D.570.R.17-C40	57	40	60	276	171,0	206	5	SONT 175612	654,80	570
MD900.3D.580.R.17-C40	58	40	60	279	174,0	209	5	SONT 175612	654,80	580
MD900.3D.590.R.17-C40	59	40	60	282	177,0	212	5	SONT 175612	654,80	590
MD900.3D.600.R.17-C40	60	40	62	285	180,0	215	5	SONT 175612	654,80	600
MD900.3D.610.R.17-C40	61	40	62	288	183,0	218	5	SONT 175612	654,80	610
MD900.3D.620.R.17-C40	62	40	64	291	186,0	221	5	SONT 175612	654,80	620
MD900.3D.630.R.17-C40	63	40	64	294	189,0	224	5	SONT 175612	654,80	630

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
12 - 13,5	T06 - IP	13,39	123	M1,8x3,6 - IP	4,84	862
14 - 17,5	T06 - IP	13,39	123	M2x4,3 - IP	4,31	863
18 - 23,5	T07 - IP	13,18	124	M2,2x5 - IP	4,19	856
24 - 27,5	T08 - IP	13,16	125	M2,5x6 - IP	5,38	857
28 - 32	T09 - IP	14,50	126	M3x7 - IP	4,14	819
32,5 - 41	T15 - IP	15,33	128	M3,5x8,6 - IP	4,14	859
42 - 63	T20 - IP	16,17	129	M4,5x10,5 - IP	4,14	864

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

MaxiDrill 900 – Indexable insert drill

Scope of supply:
Indexable Insert Drill including clamping screws and key

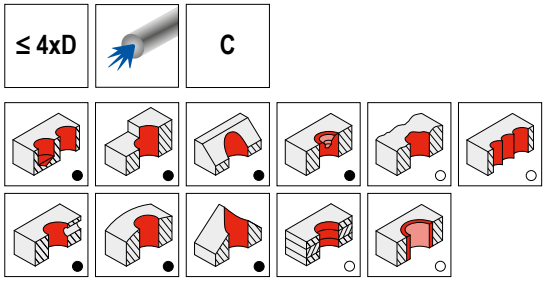

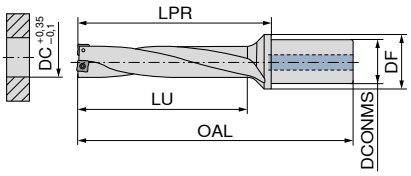

10 854 ...

Designation	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	EUR 2B/41	
MD900.4D.120.R.03-C20	**12**	20	28	114	48	64	0,4	SONT 031804	453,10	**120**
MD900.4D.125.R.03-C20	**12,5**	20	28	116	50	66	0,4	SONT 031804	453,10	**125**
MD900.4D.130.R.03-C20	**13**	20	28	118	52	68	0,4	SONT 031804	453,10	**130**
MD900.4D.135.R.03-C20	**13,5**	20	28	120	54	70	0,4	SONT 031804	453,10	**135**
MD900.4D.140.R.04-C20	**14**	20	30	123	56	73	0,7	SONT 042105	466,20	**140**
MD900.4D.145.R.04-C20	**14,5**	20	30	125	58	75	0,7	SONT 042105	466,20	**145**
MD900.4D.150.R.04-C20	**15**	20	30	127	60	77	0,7	SONT 042105	466,20	**150**
MD900.4D.155.R.04-C20	**15,5**	20	30	129	62	79	0,7	SONT 042105	466,20	**155**
MD900.4D.160.R.05-C20	**16**	20	30	131	64	81	0,7	SONT 052306	477,00	**160**
MD900.4D.165.R.05-C20	**16,5**	20	30	133	66	83	0,7	SONT 052306	477,00	**165**
MD900.4D.170.R.05-C20	**17**	20	30	135	68	85	0,7	SONT 052306	495,00	**170**
MD900.4D.175.R.05-C20	**17,5**	20	30	137	70	87	0,7	SONT 052306	495,00	**175**
MD900.4D.180.R.06-C25	**18**	25	32	146	72	90	1	SONT 062506	495,00	**180**
MD900.4D.185.R.06-C25	**18,5**	25	32	148	74	92	1	SONT 062506	495,00	**185**
MD900.4D.190.R.06-C25	**19**	25	32	150	76	94	1	SONT 062506	531,80	**190**
MD900.4D.195.R.06-C25	**19,5**	25	32	152	78	96	1	SONT 062506	531,80	**195**
MD900.4D.200.R.06-C25	**20**	25	32	154	80	98	1	SONT 062506	531,80	**200**
MD900.4D.205.R.06-C25	**20,5**	25	32	156	82	100	1	SONT 062506	531,80	**205**
MD900.4D.210.R.07-C25	**21**	25	32	159	84	103	1	SONT 072907	531,80	**210**
MD900.4D.220.R.07-C25	**22**	25	32	163	88	107	1	SONT 072907	531,80	**220**
MD900.4D.230.R.07-C25	**23**	25	32	167	92	111	1	SONT 072907	549,50	**230**
MD900.4D.240.R.08-C32	**24**	32	40	179	96	119	1,2	SONT 083308	549,50	**240**
MD900.4D.250.R.08-C32	**25**	32	40	183	100	123	1,2	SONT 083308	549,50	**250**
MD900.4D.260.R.08-C32	**26**	32	40	187	104	127	1,2	SONT 083308	607,10	**260**
MD900.4D.270.R.08-C32	**27**	32	40	191	108	131	1,2	SONT 083308	607,10	**270**
MD900.4D.280.R.09-C32	**28**	32	40	195	112	135	2,2	SONT 093808	607,10	**280**
MD900.4D.290.R.09-C32	**29**	32	40	199	116	139	2,2	SONT 093808	607,10	**290**
MD900.4D.300.R.09-C32	**30**	32	40	203	120	143	2,2	SONT 093808	607,10	**300**
MD900.4D.310.R.09-C32	**31**	32	40	207	124	147	2,2	SONT 093808	658,90	**310**
MD900.4D.320.R.09-C32	**32**	32	40	211	128	151	2,2	SONT 093808	658,90	**320**
MD900.4D.330.R.10-C40	**33**	40	50	228	132	158	3,2	SONT 104408	658,90	**330**
MD900.4D.340.R.10-C40	**34**	40	50	232	136	162	3,2	SONT 104408	658,90	**340**
MD900.4D.350.R.10-C40	**35**	40	50	236	140	166	3,2	SONT 104408	672,80	**350**
MD900.4D.360.R.10-C40	**36**	40	50	240	144	170	3,2	SONT 104408	672,80	**360**
MD900.4D.370.R.12-C40	**37**	40	56	248	148	178	3,2	SONT 124810	695,80	**370**
MD900.4D.380.R.12-C40	**38**	40	56	252	152	182	3,2	SONT 124810	695,80	**380**
MD900.4D.390.R.12-C40	**39**	40	56	256	156	186	3,2	SONT 124810	695,80	**390**
MD900.4D.400.R.12-C40	**40**	40	56	260	160	190	3,2	SONT 124810	695,80	**400**
MD900.4D.410.R.12-C40	**41**	40	56	264	164	194	3,2	SONT 124810	695,80	**410**
MD900.4D.420.R.13-C40	**42**	40	60	271	168	201	5	SONT 135012	730,00	**420**
MD900.4D.430.R.13-C40	**43**	40	60	275	172	205	5	SONT 135012	730,00	**430**
MD900.4D.440.R.13-C40	**44**	40	60	279	176	209	5	SONT 135012	730,00	**440**

Continued on next page

MaxiDrill 900 – Indexable insert drill

Scope of supply:
Indexable Insert Drill including clamping screws and key

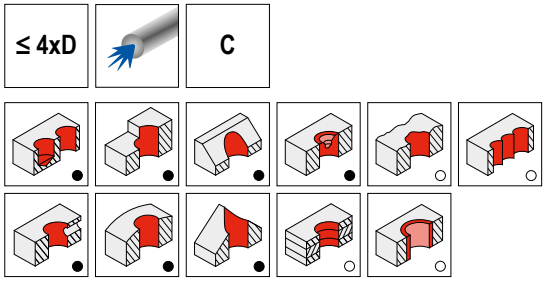

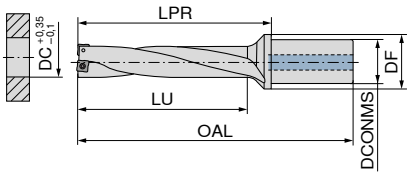

Designation	DC mm	DCONMS mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	10 854 ... EUR 2B/41	
MD900.4D.450.R.13-C40	45	40	60	283	180	213	5	SONT 135012	730,00	450
MD900.4D.460.R.13-C40	46	40	60	287	184	217	5	SONT 135012	730,00	460
MD900.4D.470.R.15-C40	47	40	60	292	188	222	5	SONT 155312	769,80	470
MD900.4D.480.R.15-C40	48	40	60	296	192	226	5	SONT 155312	769,80	480
MD900.4D.490.R.15-C40	49	40	60	300	196	230	5	SONT 155312	769,80	490
MD900.4D.500.R.15-C40	50	40	60	304	200	234	5	SONT 155312	769,80	500
MD900.4D.510.R.15-C40	51	40	60	308	204	238	5	SONT 155312	769,80	510
MD900.4D.520.R.15-C40	52	40	60	312	208	242	5	SONT 155312	769,80	520
MD900.4D.530.R.15-C40	53	40	60	316	212	246	5	SONT 155312	769,80	530
MD900.4D.540.R.15-C40	54	40	60	320	216	250	5	SONT 155312	769,80	540

Key D

Clamping screw

Spare parts DC	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
12 - 13,5	T06 - IP	13,39 123	M1,8x3,6 - IP	4,84 862
14 - 17,5	T06 - IP	13,39 123	M2x4,3 - IP	4,31 863
18 - 23	T07 - IP	13,18 124	M2,2x5 - IP	4,19 856
24 - 27	T08 - IP	13,16 125	M2,5x6 - IP	5,38 857
28 - 32	T09 - IP	14,50 126	M3x7 - IP	4,14 819
33 - 41	T15 - IP	15,33 128	M3,5x8,6 - IP	4,14 859
42 - 54	T20 - IP	16,17 129	M4,5x10,5 - IP	4,14 864

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

MaxiDrill 900 – Indexable insert drill

Scope of supply:

Indexable Insert Drill including clamping screws and key

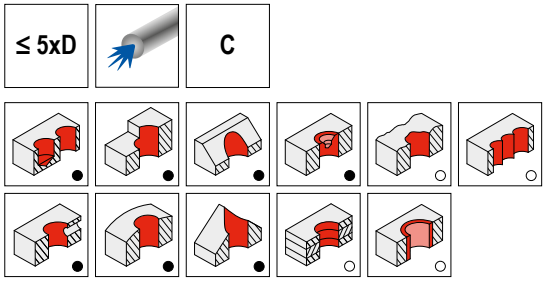

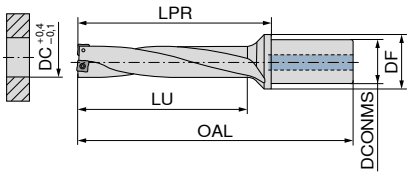

Designation	DC	DCONMS	DF	OAL	LU	LPR	torque moment	Insert	10 855 ... EUR 2B/41	
	mm	mm	mm	mm	mm	mm	Nm			
MD900.5D.120.R.03-C20	12	20	28	126	60,0	76,0	0,4	SONT 031804	541,60	120
MD900.5D.125.R.03-C20	12,5	20	28	128	62,5	78,0	0,4	SONT 031804	541,60	125
MD900.5D.130.R.03-C20	13	20	28	131	65,0	81,0	0,4	SONT 031804	541,60	130
MD900.5D.135.R.03-C20	13,5	20	28	132	67,5	82,0	0,4	SONT 031804	541,60	135
MD900.5D.140.R.04-C20	14	20	30	137	70,0	87,0	0,7	SONT 042105	553,70	140
MD900.5D.145.R.04-C20	14,5	20	30	139	72,5	89,0	0,7	SONT 042105	553,70	145
MD900.5D.150.R.04-C20	15	20	30	142	75,0	92,0	0,7	SONT 042105	553,70	150
MD900.5D.155.R.04-C20	15,5	20	30	144	77,5	94,5	0,7	SONT 042105	553,70	155
MD900.5D.160.R.05-C20	16	20	30	147	80,0	97,0	0,7	SONT 052306	567,40	160
MD900.5D.165.R.05-C20	16,5	20	30	149	82,5	99,0	0,7	SONT 052306	567,40	165
MD900.5D.170.R.05-C20	17	20	30	152	85,0	102,0	0,7	SONT 052306	587,80	170
MD900.5D.175.R.05-C20	17,5	20	30	154	87,5	104,0	0,7	SONT 052306	587,80	175
MD900.5D.180.R.06-C25	18	25	32	164	90,0	108,0	1	SONT 062506	587,80	180
MD900.5D.185.R.06-C25	18,5	25	32	166	92,5	110,0	1	SONT 062506	587,80	185
MD900.5D.190.R.06-C25	19	25	32	169	95,0	113,0	1	SONT 062506	631,60	190
MD900.5D.195.R.06-C25	19,5	25	32	171	97,5	115,0	1	SONT 062506	631,60	195
MD900.5D.200.R.06-C25	20	25	32	174	100,0	118,0	1	SONT 062506	631,60	200
MD900.5D.205.R.06-C25	20,5	25	32	175	102,5	119,0	1	SONT 062506	631,60	205
MD900.5D.210.R.07-C25	21	25	32	180	105,0	124,0	1	SONT 072907	631,60	210
MD900.5D.220.R.07-C25	22	25	32	184	110,0	128,0	1	SONT 072907	631,60	220
MD900.5D.230.R.07-C25	23	25	32	189	115,0	133,0	1	SONT 072907	654,10	230
MD900.5D.240.R.08-C32	24	32	40	203	120,0	143,0	1,2	SONT 083308	654,10	240
MD900.5D.250.R.08-C32	25	32	40	208	125,0	148,0	1,2	SONT 083308	654,10	250
MD900.5D.260.R.08-C32	26	32	40	212	130,0	152,0	1,2	SONT 083308	721,90	260
MD900.5D.270.R.08-C32	27	32	40	217	135,0	157,0	1,2	SONT 083308	721,90	270
MD900.5D.280.R.09-C32	28	32	40	221	140,0	161,0	2,2	SONT 093808	721,90	280
MD900.5D.290.R.09-C32	29	32	40	226	145,0	166,0	2,2	SONT 093808	721,90	290
MD900.5D.300.R.09-C32	30	32	40	230	150,0	170,0	2,2	SONT 093808	721,90	300
MD900.5D.310.R.09-C32	31	32	40	235	155,0	175,0	2,2	SONT 093808	782,00	310
MD900.5D.320.R.09-C32	32	32	40	239	160,0	179,0	2,2	SONT 093808	782,00	320
MD900.5D.330.R.10-C40	33	40	50	259	165,0	191,0	3,2	SONT 104408	782,00	330
MD900.5D.340.R.10-C40	34	40	50	264	170,0	196,0	3,2	SONT 104408	782,00	340
MD900.5D.350.R.10-C40	35	40	50	269	175,0	201,0	3,2	SONT 104408	799,70	350
MD900.5D.360.R.10-C40	36	40	50	274	180,0	206,0	3,2	SONT 104408	799,70	360
MD900.5D.370.R.12-C40	37	40	56	285	185,0	215,0	3,2	SONT 124810	827,10	370
MD900.5D.380.R.12-C40	38	40	56	290	190,0	220,0	3,2	SONT 124810	827,10	380
MD900.5D.390.R.12-C40	39	40	56	295	195,0	225,0	3,2	SONT 124810	827,10	390
MD900.5D.400.R.12-C40	40	40	56	300	200,0	230,0	3,2	SONT 124810	827,10	400
MD900.5D.410.R.12-C40	41	40	56	305	205,0	235,0	3,2	SONT 124810	827,10	410

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
12 - 13,5	T06 - IP	13,39	123	M1,8x3,6 - IP	4,84	862
14 - 17,5	T06 - IP	13,39	123	M2x4,3 - IP	4,31	863
18 - 23	T07 - IP	13,18	124	M2,2x5 - IP	4,19	856
24 - 27	T08 - IP	13,16	125	M2,5x6 - IP	5,38	857
28 - 32	T09 - IP	14,50	126	M3x7 - IP	4,14	819
33 - 41	T15 - IP	15,33	128	M3,5x8,6 - IP	4,14	859

Matching holders can be found in → **Chapter 16 Adapters and accessoires in the clamping technology catalogue**

SONT

Designation	IC mm	D1 mm	L mm	S mm
SONT 0318..	5,4	2,10	3,8	1,80
SONT 0421..	4,6	2,25	4,2	2,10
SONT 0523..	5,3	2,25	4,8	2,30
SONT 0625..	5,9	2,50	5,5	2,50
SONT 0729..	6,5	2,50	6,1	2,90
SONT 0833..	7,7	2,90	7,3	3,30
SONT 0938..	8,9	3,50	8,5	3,80
SONT 1044..	10,1	4,10	9,6	4,40
SONT 1248..	11,6	4,10	11,0	4,80
SONT 1350..	13,0	5,30	12,2	5,00
SONT 1553..	15,2	5,30	14,4	5,30
SONT 1756..	17,5	5,30	16,7	5,60



SONT 03..



SONT 04../05../06../07../08../09../10../12../13../15../17..

3

SONT

	-M30 CTPP430 DRAGONSKIN	-M30 CTPP430 DRAGONSKIN	-M30 CTCP420 DRAGONSKIN	-M30 CTCP420 DRAGONSKIN
	SONT	SONT	SONT	 SONT
	10 830 ...	**10 830 ...**	**10 830 ...**	**10 830 ...**
ISO RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
031804 0,4	15,93 **103** [1]		15,93 **703** [1]	
042105 0,5		18,24 **104**		18,24 **704**
052306 0,6		18,49 **105**		18,49 **705**
062506 0,6		18,81 **106**		18,81 **706**
072907 0,7		19,22 **107**		19,22 **707**
083308 0,8		19,65 **108**		19,65 **708**
093808 0,8		20,11 **109**		20,11 **709**
104408 0,8		21,06 **110**		21,06 **710**
124810 1,0		22,31 **112**		22,31 **712**
135012 1,2		23,64 **113**		23,64 **713**
155312 1,2		26,81 **115**		26,81 **715**
175612 1,2		28,39 **117**		28,39 **717**
P	●	●	●	●
M	●	●		
K	○	○	●	●
N	○	○		
S	○	○		
H				
O				

1) two usable cutting edges

→ v_c Page 74–77

CTCP420 -M30 is exclusively recommended for use on the peripheral cutting edge!

Further information on grades and chip breakers can be found on **page 85 + 86**

Application tips – eccentric sleeves

Using eccentric sleeves, the diameter of the hole can be varied and adjusted by +/- 0.3 mm with ease.

Two types of eccentric sleeve are available:
One for use with the indexable insert drill adapter and one for use with the Weldon adapter.
The difference lies solely in the design and position of the slots for the adapter's clamping screws.
There are four sizes per type, which are tailored to the shank diameter.

Eccentric sleeve for indexable insert drill adapter

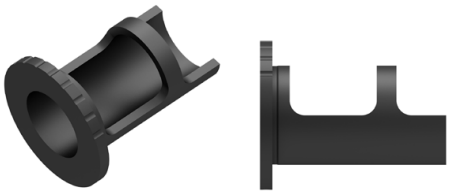

Eccentric sleeve for Weldon adapter

A scale is engraved on every eccentric sleeve (radially and on the face),
so that the user can adjust the bore diameter according to requirements.

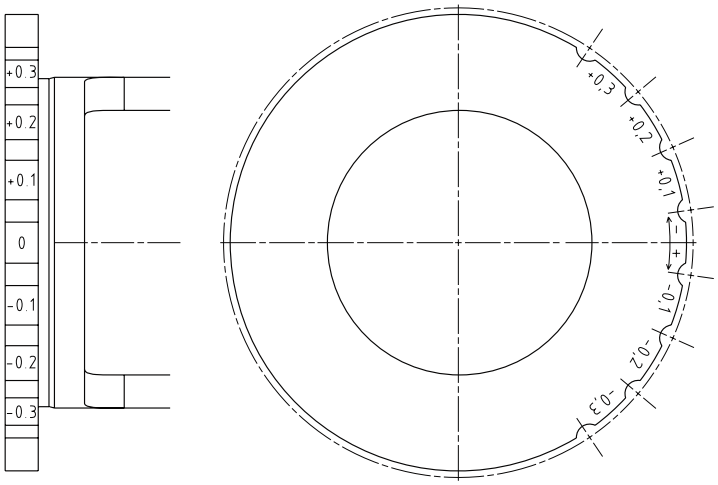

Side view *End view*

Instructions for use

1. Position the sleeve in the respective adapter and insert the indexable insert drill.
2. Set the sleeve to the zero position. → The „0“ must align with the clamping screws on the adapter.
3. Clamp the adapter's clamping screws.
4. Drill.
5. Measure the bore diameter.
6. Loosen the clamping screws.
7. Correct the bore diameter using the sleeve. → Observe the scale on the sleeve.
The value must align with the clamping screws on the adapter.
8. Clamp the clamping screws.
9. Drill.

A scale is engraved on every eccentric sleeve (radially and on the face).

Owing to the radial adjustment of the drill axis, the feed rate should be reduced by approx. 30 % for longer drilling tools (4xD and 5xD).

3

Eccentric sleeve – indexable insert drill adapter

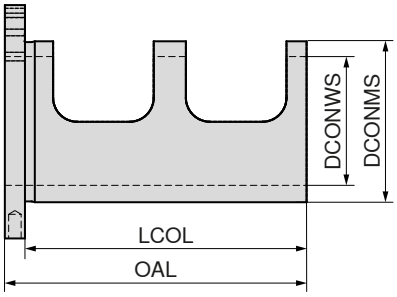

Designation	DCONWS mm	DCONMS mm	OAL mm	LCOL mm	10 870 ... EUR 2A/28	
EHB.D20.D25	20	25	61	56	197,60	**120**
EHB.D25.D32	25	32	65	60	214,90	**125**
EHB.D32.D40	32	40	75	70	234,80	**132**
EHB.D40.D50	40	50	85	80	257,20	**140**

Eccentric sleeve – standard Weldon adapter

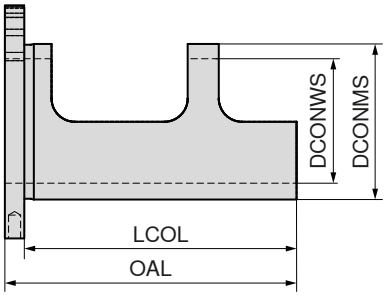

Designation	DCONWS mm	DCONMS mm	OAL mm	LCOL mm	10 871 ... EUR 2A/28	
EHW.D20.D25	20	25	61	56	197,60	**120**
EHW.D25.D32	25	32	65	60	214,90	**125**
EHW.D32.D40	32	40	75	70	234,80	**132**
EHW.D40.D50	40	50	85	80	257,20	**140**

Application tips for eccentric sleeves can be found on → **Page 58.**

Adjuster with ABS connection

- ▲ Precise adjustment using micrometric adjusting spindle
- ▲ Max. adjustment range 3 mm on diameter
- ▲ Graduation of scale 1 line 0.02 mm on diameter
- ▲ Stable clamping of the top section after adjustment using four clamping screws arranged on the face
- ▲ SZID = nominal size

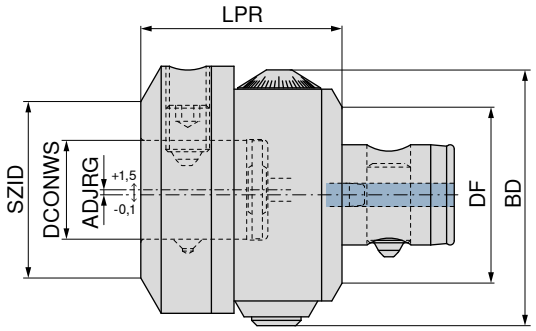

AD

84 210 ...

Adapter	KOMET no.	BD mm	LPR mm	DF mm	DCONWS mm	ADJRG mm	SZID	EUR W4/6A	
ABS 50	M01 00001	70	57	50	28	1,5	**ABS 50**	1.169,00	**05097**
ABS 63	M01 00011	88	70	63	28	1,5	**ABS 50**	1.169,00	**06397**
ABS 63	M01 00021	88	70	63	34	1,5	**ABS 63**	1.300,00	**06396**

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values for SOGX indexable inserts

Index	10 820 ...					
	-01 / -13 / -32 BK8425	-03 / -21 BK8430	-01 / -21 BK7935	-01 BK6115	-01 BK7710	-34 BK8425
	v_c (m/min)					
P.1.1	260	260	250	300		
P.1.2	260	260	220	300		260
P.1.3	270	270	270	270		
P.1.4	250	250	250	250		
P.1.5	270	270	200	300		270
P.2.1	270	270	270	270		
P.2.2	260	260	260	260		
P.2.3	180	180	160	240		180
P.2.4	150	150	130	200		150
P.3.1	160	160	140	200		160
P.3.2	130	130	120	160		130
P.3.3	120	120	110	140		120
P.4.1	180	180	150	220		
P.4.2	130	130	120	160		
M.1.1	150	150	160	220		
M.2.1	150	150	160	220		
M.3.1	140	140	150	200		
K.1.1	160	160	150	240		160
K.1.2	120	120	120	180		120
K.2.1	160	160	150	160		160
K.2.2	100	100	90	100		100
K.3.1	120	120	110	120		120
K.3.2	100	100	90	100		100
N.1.1	400	400	400		500	
N.1.2	400	400	400		500	
N.2.1	250	250	250		280	
N.2.2	250	250	250		280	
N.2.3	230	230	230		250	
N.3.1	200	200	200		250	
N.3.2	220	220	220		280	
N.3.3	330	330	330		390	
N.4.1	200	200	200		250	
S.1.1	60	60	60			
S.1.2	50	50	50			
S.2.1	60	60	60			
S.2.2	50	50	50			
S.2.3	30	30	30			
S.3.1	100	100	100		100	
S.3.2	80	80	80		80	
S.3.3	50	50	50		50	
H.1.1	100	100		100		
H.1.2	80	80		80		
H.1.3	50	50		50		
H.1.4						
H.2.1	100	100		100		
H.3.1	80	80		80		
O.1.1			100		100	
O.1.2			100		100	
O.2.1						
O.2.2			100		100	
O.3.1			100		100	

Feed rate values of -34 topography, see → **page 65**.

BK6115 -01 / BK7935 -21 are exclusively recommended for use on the peripheral cutting edge!

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed. A safety guard has to be provided as protection.

Cutting data standard values for KUB Pentron – 2xD, 3xD / KUB Pentron CS

Index	10 872 ..., 10 873 ...								
	ABS / PSC / C								
	Ø 14–15,5	Ø 16–17,5	Ø 18–19,5	Ø 20–21,5	Ø 22–23,5	Ø 24–25,5	Ø 26–27,5	Ø 28–30	Ø 31–33
	f (mm/rev)								
P.1.1	0,08	0,08	0,09	0,10	0,10	0,10	0,10	0,10	0,10
P.1.2	0,10	0,13	0,13	0,15	0,16	0,15	0,18	0,18	0,18
P.1.3	0,08	0,12	0,12	0,13	0,13	0,13	0,13	0,13	0,13
P.1.4	0,08	0,11	0,11	0,12	0,12	0,12	0,12	0,12	0,12
P.1.5	0,09	0,12	0,12	0,14	0,14	0,14	0,16	0,16	0,16
P.2.1	0,08	0,12	0,12	0,13	0,13	0,13	0,13	0,13	0,13
P.2.2	0,08	0,11	0,11	0,12	0,12	0,12	0,12	0,12	0,12
P.2.3	0.12	0,14	0,16	0,16	0,16	0,18	0,18	0,18	0,18
P.2.4	0.10	0,11	0,13	0,13	0,13	0,14	0,14	0,14	0,14
P.3.1	0,08	0,12	0,12	0,16	0,16	0,18	0,18	0,18	0,18
P.3.2	0,07	0,10	0,10	0,13	0,13	0,14	0,14	0,14	0,14
P.3.3	0,06	0,08	0,08	0,11	0,11	0,13	0,13	0,13	0,13
P.4.1	0,09	0,13	0,13	0,18	0,18	0,20	0,20	0,20	0,20
P.4.2	0,07	0,10	0,10	0,13	0,13	0,14	0,14	0,14	0,14
M.1.1	0,10	0,10	0,12	0,14	0,15	0,15	0,15	0,15	0,15
M.2.1	0,10	0,08	0,08	0,11	0,11	0,14	0,14	0,14	0,14
M.3.1	0,09	0,07	0,07	0,10	0,10	0,13	0,13	0,13	0,13
K.1.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25
K.1.2	0,09	0,11	0,11	0,14	0,14	0,17	0,19	0,19	0,19
K.2.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25
K.2.2	0,10	0,12	0,12	0,14	0,14	0,18	0,20	0,20	0,20
K.3.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25
K.3.2	0,10	0,12	0,12	0,14	0,14	0,18	0,20	0,20	0,20
N.1.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13
N.1.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13
N.2.1	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15
N.2.2	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15
N.2.3	0,09	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14
N.3.1	0,10	0,12	0,13	0,13	0,15	0,15	0,15	0,15	0,15
N.3.2	0,11	0,13	0,14	0,14	0,17	0,17	0,17	0,17	0,17
N.3.3	0,11	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14
N.4.1	0,10	0,12	0,13	0,13	0,15	0,15	0,15	0,15	0,15
S.1.1	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06
S.1.2	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06
S.2.1	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06
S.2.2	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06
S.2.3	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,04	0,04
S.3.1	0,05	0,05	0,05	0,05	0,06	0,08	0,10	0,10	0,10
S.3.2	0,04	0,04	0,04	0,04	0,05	0,07	0,09	0,09	0,09
S.3.3	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06
H.1.1	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,06
H.1.2	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04
H.1.3	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04
H.1.4									
H.2.1	0,04	0,04	0,04	0,04	0,05	0,05	0,05	0,05	0,05
H.3.1	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04
O.1.1	0,08	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10
O.1.2	0,08	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10
O.2.1									
O.2.2	0,06	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,07
O.3.1	0,10	0,10	0,10	0,10	0,11	0,11	0,11	0,11	0,11

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Cutting data standard values for KUB Pentron – 2xD, 3xD / KUB Pentron CS

Index	10 872 ..., 10 873 ... ABS / PSC / C					10 876 ... KUB Pentron CS – 3xD			
	Ø 34–37	Ø 38–42	Ø 43–46	Ø 46–52	Ø 53–65	Ø 64–69	Ø 70–75	Ø 76–84	Ø 85–96
	f (mm/rev)					f (mm/rev)			
P.1.1	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
P.1.2	0,18	0,18	0,18	0,18	0,18	0,15	0,15	0,15	0,15
P.1.3	0,13	0,13	0,13	0,16	0,16	0,15	0,15	0,15	0,15
P.1.4	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14
P.1.5	0,16	0,16	0,16	0,16	0,16	0,14	0,14	0,14	0,14
P.2.1	0,13	0,13	0,13	0,16	0,16	0,15	0,15	0,15	0,15
P.2.2	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14
P.2.3	0,18	0,18	0,18	0,18	0,18	0,20	0,20	0,20	0,20
P.2.4	0,14	0,14	0,14	0,14	0,14	0,16	0,16	0,16	0,16
P.3.1	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.3.2	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
P.3.3	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
P.4.1	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20
P.4.2	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.1.1	0,15	0,15	0,15	0,16	0,16	0,16	0,16	0,16	0,16
M.2.1	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.3.1	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
K.1.1	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25
K.1.2	0,19	0,19	0,19	0,19	0,19	0,19	0,19	0,19	0,19
K.2.1	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25
K.2.2	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20
K.3.1	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25
K.3.2	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20
N.1.1	0,13	0,13	0,13	0,14	0,14	0,14	0,14	0,14	0,14
N.1.2	0,13	0,13	0,13	0,14	0,14	0,14	0,14	0,14	0,14
N.2.1	0,15	0,15	0,15	0,18	0,18	0,18	0,18	0,18	0,18
N.2.2	0,15	0,15	0,15	0,18	0,18	0,18	0,18	0,18	0,18
N.2.3	0,14	0,14	0,14	0,16	0,16	0,16	0,16	0,16	0,16
N.3.1	0,15	0,15	0,15	0,16	0,16	0,16	0,16	0,16	0,16
N.3.2	0,17	0,17	0,17	0,18	0,18	0,18	0,18	0,18	0,18
N.3.3	0,14	0,14	0,14	0,18	0,18	0,16	0,16	0,16	0,16
N.4.1	0,15	0,15	0,15	0,16	0,16	0,16	0,16	0,16	0,16
S.1.1	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.1.2	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.1	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.2	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.3	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
S.3.1	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
S.3.2	0,09	0,09	0,09	0,09	0,09	0,09	0,09	0,09	0,09
S.3.3	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
H.1.1	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
H.1.2	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.3	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.4									
H.2.1	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05
H.3.1	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
O.1.1	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.1.2	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.2.1									
O.2.2	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07
O.3.1	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed.
A safety guard has to be provided as protection.

Cutting data standard values for KUB Pentron – 2xD, 3xD / -34 indexable inserts topography

Index		10 872 ..., 10 873 ...													
		ABS / PSC / C													
	-34 BK8425	Ø 14–15,5	Ø 16–17,5	Ø 18–19,5	Ø 20–21,5	Ø 22–23,5	Ø 24–25,5	Ø 26–27,5	Ø 28–30	Ø 31–33	Ø 34–37	Ø 38–42	Ø 43–46	Ø 46–52	Ø 53–65
	v_c (m/min)	f (mm/rev)													
P.1.1															
P.1.2	260	0,17	0,20	0,20	0,23	0,23	0,23	0,27	0,27	0,27	0,27	0,27	0,27	0,23	0,27
P.1.3															
P.1.4															
P.1.5	270	0,17	0,20	0,20	0,23	0,23	0,23	0,27	0,27	0,27	0,27	0,27	0,27	0,23	0,27
P.2.1															
P.2.2															
P.2.3	180	0,18	0,21	0,24	0,24	0,24	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27
P.2.4	150	0,17	0,2	0,23	0,23	0,23	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26
P.3.1	160	0,12	0,18	0,18	0,24	0,24	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27
P.3.2	130	0,11	0,17	0,17	0,23	0,23	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26
P.3.3	120	0,11	0,17	0,17	0,23	0,23	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26
P.4.1															
P.4.2															
M.1.1															
M.2.1															
M.3.1															
K.1.1	160	0,18	0,23	0,23	0,27	0,27	0,33	0,38	0,38	0,38	0,38	0,38	0,38	0,33	0,38
K.1.2	120	0,14	0,18	0,18	0,22	0,22	0,26	0,30	0,30	0,30	0,30	0,30	0,30	0,26	0,30
K.2.1	160	0,18	0,23	0,23	0,27	0,27	0,33	0,38	0,38	0,38	0,38	0,38	0,38	0,33	0,38
K.2.2	100	0,14	0,18	0,18	0,22	0,22	0,26	0,30	0,30	0,30	0,30	0,30	0,30	0,26	0,30
K.3.1	120	0,18	0,23	0,23	0,27	0,27	0,33	0,38	0,38	0,38	0,38	0,38	0,38	0,33	0,38
K.3.2	100	0,14	0,18	0,18	0,22	0,22	0,26	0,30	0,30	0,30	0,30	0,30	0,30	0,26	0,30
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1															
N.3.2															
N.3.3															
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Usage of -34 topography is recommended only for KUB Pentron 2xD and 3xD. Not recommended for KUB Pentron 4xD and 5xD as well as KUB Pentron CS. Higher drive power and stable setup needed!

Cutting data standard values for KUB Pentron – 4xD

Index	10 874 ...											
	ABS / C											
	Ø 14–15,5	Ø 16–17,5	Ø 18–19,5	Ø 20–21,5	Ø 22–23,5	Ø 24–25,5	Ø 26–27,5	Ø 28–30	Ø 31–33	Ø 34–37	Ø 38–42	Ø 43–46
	f (mm/rev)											
P.1.1	0,06	0,07	0,07	0,09	0,09	0,09	0,09	0,09	0,09	0,09	0,09	0,09
P.1.2	0,08	0,13	0,13	0,15	0,15	0,15	0,18	0,18	0,18	0,18	0,18	0,18
P.1.3	0,06	0,12	0,12	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
P.1.4	0,05	0,11	0,11	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12
P.1.5	0,07	0,12	0,12	0,14	0,14	0,14	0,16	0,16	0,16	0,16	0,16	0,16
P.2.1	0,06	0,12	0,12	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
P.2.2	0,05	0,11	0,11	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12
P.2.3	0,08	0,14	0,14	0,15	0,16	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.2.4	0,06	0,11	0,11	0,12	0,13	0,14	0,14	0,14	0,14	0,14	0,14	0,14
P.3.1	0,08	0,12	0,12	0,16	0,15	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.3.2	0,06	0,10	0,10	0,13	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14
P.3.3	0,06	0,08	0,08	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13
P.4.1	0,09	0,13	0,13	0,18	0,17	0,20	0,20	0,20	0,20	0,20	0,20	0,20
P.4.2	0,06	0,10	0,10	0,13	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.1.1	0,08	0,10	0,10	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
M.2.1	0,08	0,08	0,08	0,11	0,11	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.3.1	0,07	0,07	0,07	0,10	0,10	0,13	0,13	0,13	0,13	0,13	0,13	0,13
K.1.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25	0,25	0,25
K.1.2	0,10	0,10	0,10	0,10	0,10	0,20	0,20	0,20	0,20	0,20	0,20	0,20
K.2.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25	0,25	0,25
K.2.2	0,10	0,12	0,12	0,14	0,14	0,18	0,20	0,20	0,20	0,20	0,20	0,20
K.3.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25	0,25	0,25
K.3.2	0,10	0,12	0,12	0,14	0,14	0,18	0,20	0,20	0,20	0,20	0,20	0,20
N.1.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
N.1.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
N.2.1	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
N.2.2	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
N.2.3	0,09	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
N.3.1	0,10	0,12	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
N.3.2	0,11	0,13	0,14	0,14	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,17
N.3.3	0,11	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
N.4.1	0,10	0,12	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
S.1.1	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.1.2	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06
S.2.1	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.2	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06
S.2.3	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04
S.3.1	0,05	0,05	0,05	0,05	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10
S.3.2	0,04	0,04	0,04	0,04	0,05	0,07	0,09	0,09	0,09	0,09	0,09	0,09
S.3.3	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06
H.1.1	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
H.1.2	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.3	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.4												
H.2.1	0,04	0,04	0,04	0,04	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05
H.3.1	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
O.1.1	0,08	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.1.2	0,08	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.2.1												
O.2.2	0,06	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07
O.3.1	0,10	0,10	0,10	0,10	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed.
A safety guard has to be provided as protection.

Cutting data standard values for KUB Pentron – 5xD

Index	10 875 ...											
	ABS / C											
	Ø 14–15,5	Ø 16–17,5	Ø 18–19,5	Ø 20–21,5	Ø 22–23,5	Ø 24–25,5	Ø 26–27,5	Ø 28–30	Ø 31–33	Ø 34–37	Ø 38–42	Ø 43–46
	f (mm/rev)											
P.1.1	0,06	0,08	0,07	0,09	0,09	0,09	0,10	0,10	0,10	0,10	0,10	0,10
P.1.2	0,08	0,11	0,11	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15
P.1.3	0,06	0,10	0,10	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11
P.1.4	0,05	0,09	0,09	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
P.1.5	0,07	0,10	0,10	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14
P.2.1	0,06	0,10	0,10	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11
P.2.2	0,05	0,09	0,09	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
P.2.3	0,08	0,09	0,10	0,15	0,18	0,18	0,15	0,15	0,15	0,15	0,15	0,15
P.2.4	0,06	0,07	0,08	0,12	0,14	0,14	0,12	0,12	0,12	0,12	0,12	0,12
P.3.1	0,08	0,12	0,12	0,16	0,15	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.3.2	0,06	0,10	0,10	0,13	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14
P.3.3	0,06	0,08	0,08	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13
P.4.1	0,09	0,13	0,13	0,18	0,17	0,20	0,20	0,20	0,20	0,20	0,20	0,20
P.4.2	0,06	0,10	0,10	0,13	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.1.1	0,08	0,08	0,08	0,11	0,11	0,14	0,11	0,11	0,11	0,11	0,11	0,11
M.2.1	0,08	0,08	0,08	0,09	0,09	0,12	0,12	0,12	0,12	0,12	0,12	0,12
M.3.1	0,07	0,07	0,07	0,08	0,08	0,11	0,11	0,11	0,11	0,11	0,11	0,11
K.1.1	0,10	0,13	0,13	0,16	0,16	0,20	0,23	0,23	0,23	0,23	0,23	0,23
K.1.2	0,08	0,10	0,10	0,12	0,12	0,15	0,17	0,17	0,17	0,17	0,17	0,17
K.2.1	0,10	0,13	0,13	0,16	0,16	0,20	0,23	0,23	0,23	0,23	0,23	0,23
K.2.2	0,08	0,10	0,10	0,13	0,13	0,16	0,18	0,18	0,18	0,18	0,18	0,18
K.3.1	0,10	0,13	0,13	0,16	0,16	0,20	0,23	0,23	0,23	0,23	0,23	0,23
K.3.2	0,08	0,10	0,10	0,13	0,13	0,16	0,18	0,18	0,18	0,18	0,18	0,18
N.1.1	0,10	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
N.1.2	0,10	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
N.2.1	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
N.2.2	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
N.2.3	0,09	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
N.3.1	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
N.3.2	0,11	0,14	0,14	0,14	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,17
N.3.3	0,11	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
N.4.1	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
S.1.1	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.1.2	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06
S.2.1	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.2	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06
S.2.3	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04
S.3.1	0,05	0,05	0,05	0,05	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10
S.3.2	0,04	0,04	0,04	0,04	0,05	0,07	0,09	0,09	0,09	0,09	0,09	0,09
S.3.3	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06
H.1.1	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
H.1.2	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.3	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.4												
H.2.1	0,04	0,04	0,04	0,04	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05
H.3.1	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
O.1.1	0,08	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.1.2	0,08	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.2.1												
O.2.2	0,06	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07
O.3.1	0,10	0,10	0,10	0,10	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Cutting data standard values for WOEX indexable inserts

Index	10 821 ...							
	BK8425	BK7935	BK6115	BK7615	BK62	BK77	BK79	BK7710
	v_c (m/min)							
P.1.1	260	250	300				260	
P.1.2	260	220	300				260	
P.1.3	270	270	270				270	
P.1.4	240	240	250				240	
P.1.5	230	200	270				230	
P.2.1	270	270	270				270	
P.2.2	260	260	260				260	
P.2.3	180	160	240				180	
P.2.4	150	130	190				150	
P.3.1	160	140	200				160	
P.3.2	130	110	160				130	
P.3.3	120	100	140				120	
P.4.1	180	160	220				180	
P.4.2	130	110	160				130	
M.1.1	150	160	220				150	
M.2.1	150	160	220				150	
M.3.1	130	150	200				130	
K.1.1	160	150	240	260	240		160	
K.1.2	120	110	140	160	140		120	
K.2.1	160	150	160	180	160		160	
K.2.2	100	90	100	120	100		100	
K.3.1	120	110	120	140	120		120	
K.3.2	100	90	100	120	100		100	
N.1.1	400	400					400	600
N.1.2	400	400					400	500
N.2.1	250	250					250	400
N.2.2	250	250					250	300
N.2.3	230	230					230	250
N.3.1	200	200					200	400
N.3.2	220	220					220	300
N.3.3	330	330					330	300
N.4.1	200	200					200	300
S.1.1	60	50				50		60
S.1.2	50	40				40		60
S.2.1	60	50				50		60
S.2.2	50	40				40		60
S.2.3	30	30				30		60
S.3.1	100	70				70		80
S.3.2	80	60				60		80
S.3.3	50	40				40		80
H.1.1	100		100		100	40		80
H.1.2	80		80		80	30		40
H.1.3	50		50		50	20		40
H.1.4								40
H.2.1	100		100		100	40		80
H.3.1	80		80		80	30		80
O.1.1						100		100
O.1.2						100		100
O.2.1								
O.2.2						100		100
O.3.1						100		100

BK6115 -01 / BK8425 -03 are exclusively recommended for use on the peripheral cutting edge!

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed.
A safety guard has to be provided as protection.

Cutting data standard values for KUB Trigon – 2xD

Index	10 892 ...												
	ABS / K												
	Ø 14–16	Ø 17–19	Ø 20–24	Ø 25–29	Ø 30–36	Ø 37–40	Ø 41–44	Ø 45–46	Ø 46–52	Ø 53–65	Ø 64–69	Ø 70–75	Ø 76–82
	f (mm/rev)												
P.1.1	0,08	0,10	0,10	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12
P.1.2	0,08	0,10	0,12	0,14	0,16	0,16	0,18	0,20	0,20	0,25	0,25	0,25	0,25
P.1.3	0,06	0,08	0,12	0,14	0,14	0,14	0,16	0,14	0,18	0,20	0,25	0,25	0,25
P.1.4	0,05	0,07	0,11	0,13	0,13	0,13	0,14	0,12	0,16	0,18	0,22	0,22	0,22
P.1.5	0,07	0,09	0,11	0,13	0,14	0,14	0,16	0,18	0,20	0,22	0,22	0,22	0,22
P.2.1	0,06	0,08	0,12	0,14	0,14	0,14	0,16	0,14	0,18	0,20	0,25	0,25	0,25
P.2.2	0,06	0,08	0,11	0,13	0,13	0,13	0,15	0,12	0,16	0,18	0,22	0,22	0,22
P.2.3	0,06	0,08	0,10	0,14	0,16	0,16	0,16	0,16	0,16	0,18	0,20	0,20	0,20
P.2.4	0,05	0,06	0,08	0,11	0,13	0,13	0,13	0,14	0,14	0,16	0,18	0,18	0,18
P.3.1	0,06	0,08	0,10	0,12	0,12	0,12	0,14	0,14	0,16	0,16	0,16	0,16	0,16
P.3.2	0,05	0,06	0,08	0,10	0,10	0,10	0,11	0,12	0,14	0,14	0,14	0,14	0,14
P.3.3	0,04	0,06	0,07	0,08	0,08	0,08	0,10	0,11	0,13	0,13	0,13	0,13	0,13
P.4.1	0,07	0,09	0,11	0,13	0,13	0,13	0,15	0,15	0,17	0,17	0,17	0,17	0,17
P.4.2	0,05	0,06	0,08	0,10	0,10	0,10	0,11	0,12	0,14	0,14	0,14	0,14	0,14
M.1.1	0,06	0,06	0,08	0,12	0,12	0,12	0,14	0,14	0,14	0,16	0,16	0,16	0,16
M.2.1	0,06	0,06	0,08	0,12	0,12	0,12	0,12	0,12	0,12	0,16	0,16	0,16	0,16
M.3.1	0,05	0,05	0,07	0,11	0,11	0,11	0,11	0,11	0,11	0,15	0,15	0,15	0,15
K.1.1	0,10	0,12	0,14	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,30
K.1.2	0,08	0,08	0,10	0,14	0,14	0,16	0,18	0,18	0,18	0,20	0,25	0,25	0,25
K.2.1	0,08	0,10	0,14	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,30
K.2.2	0,08	0,10	0,13	0,20	0,13	0,13	0,14	0,22	0,22	0,25	0,25	0,25	0,25
K.3.1	0,10	0,12	0,16	0,25	0,16	0,16	0,18	0,25	0,25	0,30	0,30	0,30	0,30
K.3.2	0,08	0,10	0,13	0,20	0,13	0,13	0,14	0,22	0,22	0,25	0,25	0,25	0,25
N.1.1	0,05	0,08	0,08	0,10	0,10	0,12	0,12	0,12	0,12	0,14	0,14	0,14	0,14
N.1.2	0,05	0,08	0,08	0,10	0,10	0,12	0,12	0,12	0,12	0,14	0,14	0,14	0,14
N.2.1	0,10	0,12	0,14	0,18	0,18	0,20	0,20	0,18	0,20	0,20	0,20	0,20	0,20
N.2.2	0,10	0,12	0,14	0,18	0,18	0,20	0,20	0,18	0,20	0,20	0,20	0,20	0,20
N.2.3	0,09	0,11	0,13	0,16	0,16	0,18	0,18	0,16	0,18	0,18	0,18	0,18	0,18
N.3.1	0,05	0,08	0,12	0,16	0,16	0,18	0,20	0,20	0,20	0,25	0,25	0,25	0,25
N.3.2	0,06	0,09	0,13	0,18	0,18	0,20	0,22	0,22	0,22	0,26	0,26	0,26	0,26
N.3.3	0,05	0,08	0,08	0,10	0,10	0,10	0,12	0,122	0,12	0,16	0,16	0,16	0,16
N.4.1	0,05	0,08	0,12	0,16	0,16	0,18	0,20	0,20	0,20	0,25	0,25	0,25	0,25
S.1.1	0,04	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,12	0,12	0,12	0,12
S.1.2	0,03	0,05	0,06	0,08	0,08	0,08	0,08	0,08	0,08	0,10	0,10	0,10	0,10
S.2.1	0,04	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,12	0,12	0,12	0,12
S.2.2	0,03	0,05	0,06	0,08	0,08	0,08	0,08	0,08	0,08	0,10	0,10	0,10	0,10
S.2.3	0,02	0,03	0,04	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,06	0,06
S.3.1	0,07	0,09	0,11	0,13	0,11	0,13	0,13	0,10	0,10	0,12	0,12	0,14	0,14
S.3.2	0,06	0,08	0,10	0,12	0,10	0,12	0,12	0,10	0,10	0,12	0,12	0,14	0,14
S.3.3	0,04	0,05	0,06	0,07	0,06	0,07	0,07	0,06	0,06	0,08	0,08	0,08	0,08
H.1.1	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,08	0,08	0,08	0,08
H.1.2	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,06	0,06	0,08	0,08
H.1.3	0,04	0,04	0,04	0,04	0,04	0,04	0,04						
H.1.4													
H.2.1	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05
H.3.1	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
O.1.1	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.1.2	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.2.1													
O.2.2	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07
O.3.1	0,10	0,10	0,10	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Cutting data standard values for KUB Trigon – 3xD

Index	10 893 ...												
	ABS / K												
	Ø 14–16	Ø 17–19	Ø 20–24	Ø 25–29	Ø 30–36	Ø 37–40	Ø 41–44	Ø 45–46	Ø 46–52	Ø 53–65	Ø 64–69	Ø 70–75	Ø 76–82
	f (mm/rev)												
P.1.1	0,08	0,10	0,10	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12
P.1.2	0,08	0,10	0,12	0,14	0,16	0,16	0,20	0,20	0,20	0,25	0,25	0,25	0,25
P.1.3	0,06	0,08	0,12	0,14	0,14	0,14	0,16	0,14	0,18	0,20	0,25	0,25	0,25
P.1.4	0,05	0,07	0,11	0,13	0,13	0,13	0,14	0,12	0,16	0,18	0,22	0,22	0,22
P.1.5	0,07	0,09	0,11	0,13	0,14	0,14	0,18	0,18	0,20	0,22	0,22	0,22	0,22
P.2.1	0,06	0,08	0,12	0,14	0,14	0,14	0,16	0,14	0,18	0,20	0,25	0,25	0,25
P.2.2	0,06	0,08	0,11	0,13	0,13	0,13	0,15	0,12	0,16	0,18	0,22	0,22	0,22
P.2.3	0,06	0,08	0,10	0,14	0,16	0,16	0,16	0,16	0,16	0,18	0,20	0,20	0,20
P.2.4	0,05	0,06	0,08	0,11	0,13	0,13	0,13	0,14	0,14	0,16	0,18	0,18	0,18
P.3.1	0,06	0,08	0,10	0,12	0,12	0,12	0,14	0,14	0,16	0,16	0,16	0,16	0,16
P.3.2	0,05	0,06	0,08	0,10	0,10	0,10	0,11	0,12	0,14	0,14	0,14	0,14	0,14
P.3.3	0,04	0,06	0,07	0,08	0,08	0,08	0,10	0,11	0,13	0,13	0,13	0,13	0,13
P.4.1	0,07	0,09	0,11	0,13	0,13	0,13	0,15	0,15	0,17	0,17	0,17	0,17	0,17
P.4.2	0,05	0,06	0,08	0,10	0,10	0,10	0,11	0,12	0,14	0,14	0,14	0,14	0,14
M.1.1	0,06	0,06	0,08	0,12	0,12	0,12	0,14	0,14	0,14	0,16	0,16	0,16	0,16
M.2.1	0,06	0,06	0,08	0,12	0,12	0,12	0,12	0,12	0,12	0,16	0,16	0,16	0,16
M.3.1	0,05	0,05	0,07	0,11	0,11	0,11	0,11	0,11	0,11	0,15	0,15	0,15	0,15
K.1.1	0,10	0,12	0,14	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,30
K.1.2	0,08	0,08	0,10	0,14	0,14	0,16	0,18	0,18	0,18	0,20	0,25	0,25	0,25
K.2.1	0,08	0,10	0,14	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,30
K.2.2	0,08	0,10	0,13	0,20	0,20	0,20	0,20	0,22	0,22	0,25	0,25	0,25	0,25
K.3.1	0,10	0,12	0,16	0,25	0,25	0,25	0,25	0,25	0,25	0,30	0,30	0,30	0,30
K.3.2	0,08	0,10	0,13	0,20	0,20	0,20	0,20	0,22	0,22	0,25	0,25	0,25	0,25
N.1.1	0,05	0,08	0,08	0,10	0,10	0,12	0,12	0,12	0,12	0,14	0,14	0,14	0,14
N.1.2	0,05	0,08	0,08	0,10	0,10	0,12	0,12	0,12	0,12	0,14	0,14	0,14	0,14
N.2.1	0,10	0,12	0,14	0,18	0,18	0,20	0,20	0,18	0,20	0,20	0,20	0,20	0,20
N.2.2	0,10	0,12	0,14	0,18	0,18	0,20	0,20	0,18	0,20	0,20	0,20	0,20	0,20
N.2.3	0,09	0,11	0,13	0,16	0,16	0,18	0,18	0,16	0,18	0,18	0,18	0,18	0,18
N.3.1	0,05	0,08	0,12	0,16	0,16	0,18	0,20	0,20	0,20	0,25	0,25	0,25	0,25
N.3.2	0,06	0,09	0,13	0,18	0,18	0,20	0,22	0,22	0,22	0,26	0,26	0,26	0,26
N.3.3	0,06	0,09	0,09	0,11	0,11	0,11	0,13	0,122	0,12	0,16	0,16	0,16	0,16
N.4.1	0,05	0,08	0,12	0,16	0,16	0,18	0,20	0,20	0,20	0,25	0,25	0,25	0,25
S.1.1	0,04	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,12	0,12	0,12	0,12
S.1.2	0,03	0,05	0,06	0,08	0,08	0,08	0,08	0,08	0,08	0,10	0,10	0,10	0,10
S.2.1	0,04	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,12	0,12	0,12	0,12
S.2.2	0,03	0,05	0,06	0,08	0,08	0,08	0,08	0,08	0,08	0,10	0,10	0,10	0,10
S.2.3	0,02	0,03	0,04	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,06	0,06
S.3.1	0,07	0,09	0,11	0,13	0,11	0,13	0,13	0,10	0,10	0,12	0,12	0,14	0,14
S.3.2	0,06	0,08	0,10	0,12	0,10	0,12	0,12	0,10	0,10	0,12	0,12	0,14	0,14
S.3.3	0,04	0,05	0,06	0,07	0,06	0,07	0,07	0,06	0,06	0,08	0,08	0,08	0,08
H.1.1	0,05	0,08	0,08	0,10	0,10	0,10	0,10	0,08	0,08	0,08	0,08	0,08	0,08
H.1.2	0,04	0,06	0,06	0,08	0,08	0,08	0,08	0,06	0,06	0,06	0,06	0,08	0,08
H.1.3	0,03	0,04	0,04	0,05	0,05	0,05	0,05						
H.1.4													
H.2.1	0,05	0,08	0,08	0,10	0,10	0,10	0,10	0,05	0,05	0,05	0,05	0,05	0,05
H.3.1	0,04	0,06	0,06	0,08	0,08	0,08	0,08	0,04	0,04	0,04	0,04	0,04	0,04
O.1.1	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.1.2	0,08	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
O.2.1													
O.2.2	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,07
O.3.1	0,10	0,10	0,10	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11	0,11

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed.
A safety guard has to be provided as protection.

Cutting data standard values for KUB Trigon – 4xD

Index	10 894 ... K					10 894 ... ABS						
	Ø 14–16	Ø 17–19	Ø 20–24	Ø 25–29	Ø 30–35	Ø 14–16	Ø 17–19	Ø 20–24	Ø 25–29	Ø 30–36	Ø 37–40	Ø 41–44
	f (mm/rev)					f (mm/rev)						
P.1.1	0,06	0,08	0,08	0,10	0,11	0,06	0,08	0,08	0,10	0,10	0,10	0,10
P.1.2	0,06	0,08	0,10	0,12	0,14	0,06	0,08	0,10	0,12	0,14	0,14	0,18
P.1.3	0,04	0,06	0,10	0,12	0,12	0,04	0,06	0,10	0,12	0,12	0,12	0,14
P.1.4	0,04	0,05	0,09	0,11	0,11	0,04	0,05	0,09	0,11	0,11	0,11	0,13
P.1.5	0,05	0,07	0,09	0,11	0,13	0,05	0,07	0,09	0,11	0,13	0,13	0,16
P.2.1	0,04	0,06	0,10	0,12	0,12	0,04	0,06	0,10	0,12	0,12	0,12	0,14
P.2.2	0,04	0,06	0,10	0,11	0,11	0,04	0,06	0,10	0,11	0,11	0,11	0,13
P.2.3	0,04	0,06	0,08	0,12	0,14	0,04	0,06	0,08	0,12	0,14	0,14	0,14
P.2.4	0,03	0,05	0,06	0,10	0,11	0,03	0,05	0,06	0,10	0,11	0,11	0,11
P.3.1	0,04	0,06	0,08	0,10	0,11	0,04	0,06	0,08	0,10	0,10	0,10	0,12
P.3.2	0,03	0,05	0,06	0,08	0,09	0,03	0,05	0,06	0,08	0,08	0,08	0,10
P.3.3	0,03	0,04	0,06	0,07	0,08	0,03	0,04	0,06	0,07	0,07	0,07	0,08
P.4.1	0,04	0,07	0,09	0,11	0,12	0,04	0,07	0,09	0,11	0,11	0,11	0,13
P.4.2	0,03	0,05	0,06	0,08	0,09	0,03	0,05	0,06	0,08	0,08	0,08	0,10
M.1.1	0,04	0,04	0,06	0,10	0,11	0,04	0,04	0,06	0,10	0,10	0,10	0,12
M.2.1	0,04	0,04	0,06	0,10	0,11	0,04	0,04	0,06	0,10	0,10	0,10	0,10
M.3.1	0,04	0,04	0,05	0,09	0,10	0,04	0,04	0,05	0,09	0,09	0,09	0,09
K.1.1	0,08	0,10	0,12	0,18	0,19	0,08	0,10	0,12	0,18	0,18	0,18	0,23
K.1.2	0,06	0,06	0,08	0,12	0,12	0,06	0,06	0,08	0,12	0,12	0,14	0,16
K.2.1	0,06	0,08	0,12	0,18	0,19	0,06	0,08	0,12	0,18	0,18	0,18	0,23
K.2.2	0,06	0,08	0,11	0,18	0,19	0,06	0,08	0,11	0,18	0,18	0,18	0,18
K.3.1	0,08	0,10	0,14	0,23	0,24	0,08	0,10	0,14	0,23	0,23	0,23	0,23
K.3.2	0,06	0,08	0,11	0,18	0,19	0,06	0,08	0,11	0,18	0,18	0,18	0,18
N.1.1	0,03	0,06	0,06	0,08	0,09	0,03	0,06	0,06	0,08	0,08	0,10	0,10
N.1.2	0,03	0,06	0,06	0,08	0,09	0,03	0,06	0,06	0,08	0,08	0,10	0,10
N.2.1	0,08	0,10	0,12	0,16	0,17	0,08	0,10	0,12	0,16	0,16	0,18	0,18
N.2.2	0,08	0,10	0,12	0,16	0,17	0,08	0,10	0,12	0,16	0,16	0,18	0,18
N.2.3	0,07	0,09	0,11	0,14	0,15	0,07	0,09	0,11	0,14	0,14	0,16	0,16
N.3.1	0,04	0,06	0,10	0,14	0,15	0,03	0,06	0,10	0,14	0,14	0,16	0,18
N.3.2	0,04	0,07	0,11	0,15	0,17	0,03	0,07	0,11	0,15	0,15	0,18	0,20
N.3.3	0,03	0,07	0,07	0,09	0,10	0,03	0,06	0,06	0,08	0,08	0,08	0,10
N.4.1	0,04	0,06	0,10	0,14	0,15	0,03	0,06	0,10	0,14	0,14	0,16	0,18
S.1.1	0,03	0,05	0,07	0,08	0,09	0,02	0,04	0,06	0,08	0,08	0,08	0,08
S.1.2	0,02	0,04	0,06	0,06	0,07	0,02	0,03	0,05	0,06	0,06	0,06	0,06
S.2.1	0,03	0,05	0,07	0,08	0,09	0,02	0,04	0,06	0,08	0,08	0,08	0,08
S.2.2	0,02	0,04	0,06	0,06	0,07	0,02	0,03	0,05	0,06	0,06	0,06	0,06
S.2.3	0,02	0,03	0,04	0,04	0,05	0,01	0,02	0,03	0,04	0,04	0,04	0,04
S.3.1	0,04	0,07	0,09	0,11	0,11	0,04	0,07	0,09	0,11	0,09	0,11	0,11
S.3.2	0,04	0,06	0,08	0,10	0,10	0,04	0,06	0,08	0,10	0,08	0,10	0,10
S.3.3	0,02	0,04	0,05	0,06	0,06	0,02	0,04	0,05	0,06	0,05	0,06	0,06
H.1.1	0,03	0,06	0,06	0,08	0,08	0,03	0,06	0,06	0,08	0,08	0,08	0,08
H.1.2	0,02	0,05	0,05	0,06	0,06	0,02	0,05	0,05	0,06	0,06	0,06	0,06
H.1.3	0,02	0,03	0,03	0,04	0,04	0,02	0,03	0,03	0,04	0,04	0,04	0,04
H.1.4												
H.2.1	0,03	0,06	0,06	0,08	0,08	0,03	0,06	0,06	0,08	0,08	0,08	0,08
H.3.1	0,02	0,05	0,05	0,06	0,06	0,02	0,05	0,05	0,06	0,06	0,06	0,06
O.1.1	0,08	0,08	0,10	0,10	0,10	0,08	0,08	0,10	0,10	0,10	0,10	0,10
O.1.2	0,08	0,08	0,10	0,10	0,10	0,08	0,08	0,10	0,10	0,10	0,10	0,10
O.2.1												
O.2.2	0,06	0,06	0,06	0,07	0,07	0,06	0,06	0,06	0,07	0,07	0,07	0,07
O.3.1	0,10	0,10	0,10	0,11	0,11	0,10	0,10	0,10	0,11	0,11	0,11	0,11

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Cutting data standard values for KUB Centron

Index	Ø 20–25 mm				Ø 26–32 mm				Ø 33–45 mm			
		Centring tip				Centring tip				Centring tip		
		10 863 ... (TiN/TiAlN)	10 862 ... (TiN)	10 862 ... (TiAlN)		10 863 ... (TiN/TiAlN)	10 862 ... (TiN)	10 862 ... (TiAlN)		10 863 ... (TiN/TiAlN)	10 862 ... (TiN)	10 862 ... (TiAlN)
	f (mm/rev)	v_c (m/min)			f (mm/rev)	v_c (m/min)			f (mm/rev)	v_c (m/min)		
P.1.1	0,08	250	160		0,08	250	160		0,10	250	160	
P.1.2	0,12	250	160		0,14	250	160		0,14	250	160	
P.1.3	0,10	200	160		0,12	200	160		0,12	200	160	
P.1.4	0,09	180	160		0,11	180	160		0,11	180	160	
P.1.5	0,11	230	160		0,12	230	160		0,12	230	160	
P.2.1	0,10	200	160		0,12	200	160		0,12	200	160	
P.2.2	0,10	190	150		0,11	190	150		0,11	190	150	
P.2.3	0,12	180	140		0,14	180	140		0,14	180	140	
P.2.4	0,10	150	120		0,12	150	120		0,12	150	120	
P.3.1	0,08	160	120		0,10	160	120		0,10	160	120	
P.3.2	0,06	140	100		0,08	140	100		0,08	140	100	
P.3.3	0,07	130	90		0,07	130	90		0,07	130	90	
P.4.1	0,09	180	130		0,11	180	130		0,11	180	130	
P.4.2	0,06	140	100		0,08	140	100		0,08	140	100	
M.1.1	0,10	160		70	0,12	160		70	0,12	160		70
M.2.1	0,08	120		70	0,10	120		70	0,10	120		70
M.3.1	0,07	110		60	0,08	110		60	0,08	110		60
K.1.1	0,14	200		100	0,16	200		100	0,16	200		100
K.1.2	0,12	160		100	0,14	160		100	0,14	160		100
K.2.1	0,12	160		100	0,14	160		100	0,14	160		100
K.2.2	0,10	100		80	0,12	100		80	0,12	100		80
K.3.1	0,12	120		100	0,14	120		100	0,14	120		100
K.3.2	0,10	100		80	0,12	100		80	0,12	100		80
N.1.1	0,07	350	350		0,07	350	350		0,10	350	350	
N.1.2	0,07	350	350		0,07	350	350		0,10	350	350	
N.2.1	0,10	250	250		0,12	250	250		0,16	250	250	
N.2.2	0,10	250	250		0,12	250	250		0,16	250	250	
N.2.3	0,09	230	230		0,11	230	230		0,15	230	230	
N.3.1	0,14	200	200		0,16	200	200		0,18	200	200	
N.3.2	0,15	220	220		0,18	220	220		0,20	220	220	
N.3.3	0,09	250	250		0,10	250	250		0,14	250	250	
N.4.1	0,14	200	200		0,16	200	200		0,18	200	200	
S.1.1	0,04	50		25	0,05	50		25	0,05	50		25
S.1.2	0,03	40		20	0,04	40		20	0,04	40		20
S.2.1	0,04	50		25	0,05	50		25	0,05	50		25
S.2.2	0,03	40		20	0,04	40		20	0,04	40		20
S.2.3	0,03	30		20	0,04	30		20	0,04	30		20
S.3.1	0,06	80		50	0,07	80		50	0,07	80		50
S.3.2	0,05	80		40	0,06	80		40	0,06	80		40
S.3.3	0,03	50		30	0,04	50		30	0,04	50		30
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1	0,08	100	100		0,10	100	100		0,10	100	100	
O.1.2	0,08	100	100		0,10	100	100		0,10	100	100	
O.2.1												
O.2.2	0,08	50	30		0,10	50	30		0,10	50	30	
O.3.1	0,08	100	100		0,10	100	100		0,10	100	100	

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed. A safety guard has to be provided as protection.

The cutting data of the KUB Centron depends on the centring tip and not on the indexable inserts. **Please select the cutting data of the centring tip.** 10 863 ... is only suitable up to drilling depth 6xD.

Index	Ø 46–54 mm				Ø 55–64 mm				Ø 65–71 mm			Ø 72–81 mm		
		Centring tip				Centring tip				Centring tip			Centring tip	
		10 863 ... (TiN/TiAlN)	10 862 ... (TiN)	10 862 ... (TiAlN)		10 863 ... (TiN/TiAlN)	10 862 ... (TiN)	10 862 ... (TiAlN)		10 862 ... (TiN)	10 862 ... (TiAlN)		10 862 ... (TiN)	10 862 ... (TiAlN)
	f (mm/rev)	v_c (m/min)			f (mm/rev)	v_c (m/min)			f (mm/rev)	v_c (m/min)		f (mm/rev)	v_c (m/min)	
P.1.1	0,10	250	160		0,10	250	160		0,10	160		0,10	160	
P.1.2	0,14	250	160		0,16	250	160		0,16	160		0,16	160	
P.1.3	0,12	200	160		0,14	200	160		0,14	160		0,14	160	
P.1.4	0,11	180	160		0,12	180	160		0,12	160		0,12	160	
P.1.5	0,12	230	160		0,14	230	160		0,14	160		0,14	160	
P.2.1	0,12	200	160		0,14	200	160		0,14	160		0,14	160	
P.2.2	0,11	190	150		0,12	190	150		0,12	150		0,12	150	
P.2.3	0,14	180	140		0,16	180	140		0,16	140		0,16	140	
P.2.4	0,12	150	120		0,13	150	120		0,13	120		0,13	120	
P.3.1	0,10	160	120		0,12	160	120		0,12	120		0,12	120	
P.3.2	0,08	140	100		0,10	140	100		0,10	100		0,10	100	
P.3.3	0,07	130	90		0,09	130	90		0,09	90		0,09	90	
P.4.1	0,11	180	130		0,14	180	130		0,14	130		0,14	130	
P.4.2	0,08	140	100		0,10	140	100		0,10	100		0,10	100	
M.1.1	0,12	160		70	0,12	160		70	0,12		70	0,12		70
M.2.1	0,10	120		70	0,10	120		70	0,10		70	0,10		70
M.3.1	0,08	110		60	0,08	110		60	0,08		60	0,08		60
K.1.1	0,16	200		100	0,16	200		100	0,16		100	0,16		100
K.1.2	0,14	160		100	0,14	160		100	0,14		100	0,14		100
K.2.1	0,14	160		100	0,14	160		100	0,14		100	0,14		100
K.2.2	0,12	100		80	0,12	100		80	0,12		80	0,12		80
K.3.1	0,14	120		100	0,14	120		100	0,14		100	0,14		100
K.3.2	0,12	100		80	0,12	100		80	0,12		80	0,12		80
N.1.1	0,10	350	350		0,10	350	350		0,10	350		0,10	350	
N.1.2	0,10	350	350		0,10	350	350		0,10	350		0,10	350	
N.2.1	0,16	250	250		0,16	250	250		0,16	250		0,16	250	
N.2.2	0,16	250	250		0,16	250	250		0,16	250		0,16	250	
N.2.3	0,15	230	230		0,15	230	230		0,15	230		0,15	230	
N.3.1	0,18	200	200		0,18	200	200		0,18	200		0,18	200	
N.3.2	0,20	220	220		0,20	220	220		0,20	220		0,20	220	
N.3.3	0,14	250	250		0,14	250	250		0,14	250		0,14	250	
N.4.1	0,18	200	200		0,18	200	200		0,18	200		0,18	200	
S.1.1	0,05	50		25	0,05	50		25	0,05		25	0,05		25
S.1.2	0,04	40		20	0,04	40		20	0,04		20	0,04		20
S.2.1	0,05	50		25	0,05	50		25	0,05		25	0,05		25
S.2.2	0,04	40		20	0,04	40		20	0,04		20	0,04		20
S.2.3	0,04	30		20	0,04	30		20	0,04		20	0,04		20
S.3.1	0,07	80		50	0,07	80		50	0,07		50	0,07		50
S.3.2	0,06	80		40	0,06	80		40	0,06		40	0,06		40
S.3.3	0,04	50		30	0,04	50		30	0,04		30	0,04		30
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1	0,10	100	100		0,10	100	100		0,10	100		0,10	100	
O.1.2	0,10	100	100		0,10	100	100		0,10	100		0,10	100	
O.2.1														
O.2.2	0,10	50	30		0,10	50	30		0,10	30		0,10	30	
O.3.1	0,10	100	100		0,10	100	100		0,10	100		0,10	100	

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Cutting data standard values for MaxiDrill 900 – 2xD

Index	10 830 ...		10 852 ...									
	SONT		C									
	CTCP420	CTPP430	Ø 12–15,5	Ø 16–17,5	Ø 18–20,5	Ø 21–23,5	Ø 24–27,5	Ø 28–32	Ø 32,5–36,5	Ø 37–41	Ø 41,5–46	Ø 46,5–63
	v_c (m/min)		f (mm/rev)									
P.1.1	300	215	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.2	260	190	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.3	230	165	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.4	220	160	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.5	200	150	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.1	270	200	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.2	215	160	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.3	200	140	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.4	160	110	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.1	200	140	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.2	160	100	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.3	120	70	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.4.1	200	140	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.4.2	180	120	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
M.1.1		140	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
M.2.1		100	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
M.3.1		130	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
K.1.1	250	140	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.1.2	230	130	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.2.1	230	140	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.2.2	210	140	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.3.1	190	100	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.3.2	170	100	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
N.1.1		300	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.1.2		315	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.1		270	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.2		140	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.3		180	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.1		200	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.2		200	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.3		200	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.4.1		200	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
S.1.1		65	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.1.2		50	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.1		45	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.2		40	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.3		40	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.1		65	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.2		50	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.3		40	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed. A safety guard has to be provided as protection.

CTCP420 -M30 is exclusively recommended for use on the peripheral cutting edge!

Cutting data standard values for MaxiDrill 900 – 3xD

Index	10 853 ...									
	C									
	Ø 12–15,5	Ø 16–17,5	Ø 18–20,5	Ø 21–23,5	Ø 24–27,5	Ø 28–32	Ø 32,5–36,5	Ø 37–41	Ø 41,5–46	Ø 46,5–63
	f (mm/rev)									
P.1.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.4	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.5	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.4	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.4.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.4.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
M.1.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
M.2.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
M.3.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
K.1.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.1.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.2.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.2.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.3.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.3.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
N.1.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.1.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.3	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.3	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.4.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
S.1.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.1.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.3	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.3	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Cutting data standard values for MaxiDrill 900 – 4xD

Index	10 854 ...									
	C									
	Ø 12–15,5	Ø 16–17,5	Ø 18–20,5	Ø 21–23,5	Ø 24–27,5	Ø 28–32	Ø 32,5–36,5	Ø 37–41	Ø 41,5–46	Ø 46,5–54
	f (mm/rev)									
P.1.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.4	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.1.5	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.2.4	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.3.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.4.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
P.4.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18	0,18	0,20
M.1.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
M.2.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
M.3.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15	0,15	0,15
K.1.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.1.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.2.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.2.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.3.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
K.3.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25
N.1.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.1.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.2.3	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.3.3	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
N.4.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13
S.1.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.1.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.2.3	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
S.3.3	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08	0,08	0,10
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed.
A safety guard has to be provided as protection.

Cutting data standard values for MaxiDrill 900 – 5xD

Index	10 855 ...							
	C							
	Ø 12–15,5	Ø 16–17,5	Ø 18–20	Ø 21–23	Ø 24–27	Ø 28–32	Ø 33–36	Ø 37–41
	f (mm/rev)							
P.1.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.1.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.1.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.1.4	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.1.5	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.2.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.2.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.2.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.2.4	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.3.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.3.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.3.3	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.4.1	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
P.4.2	0,10	0,10	0,12	0,15	0,15	0,15	0,15	0,18
M.1.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15
M.2.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15
M.3.1	0,08	0,08	0,09	0,09	0,10	0,10	0,10	0,15
K.1.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25
K.1.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25
K.2.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25
K.2.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25
K.3.1	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25
K.3.2	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25
N.1.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.1.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.2.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.2.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.2.3	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.3.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.3.2	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.3.3	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
N.4.1	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13
S.1.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.1.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.2.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.2.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.2.3	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.3.1	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.3.2	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
S.3.3	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,08
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1								
O.1.2								
O.2.1								
O.2.2								
O.3.1								

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

Maximum adjustment range (X) during solid drilling / from the centre for stationary applications – KUB Pentron

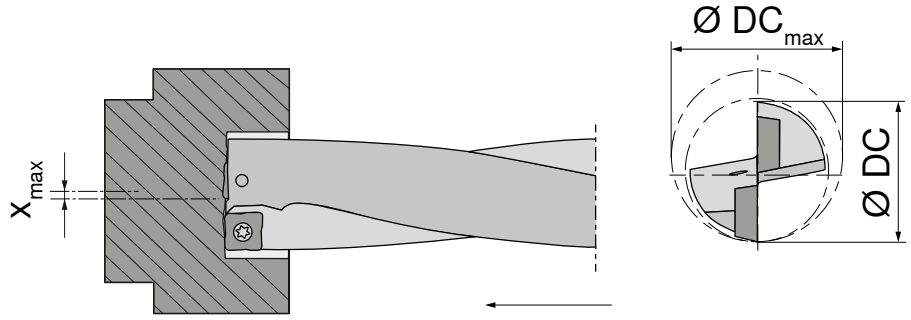

At max. offset X_{max} the hole will be:
$D_{max} = D + 2X_{max}$
e.g. for D = 20 mm, X_{max} = 0.25 mm:
$D_{max} = D + 0.5 = 20.5$ mm

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
14,0	SOGX 04....	0,25	14,5
14,5		0,25	15,0
15,0		0,25	15,5
15,5		0,25	16,0
16,0		0,25	16,5
16,5	SOGX 05....	0,25	17,0
17,0		0,25	17,5
17,5		0,25	18,0
18,0		0,25	18,5
18,5	SOGX 06....	0,25	19,0
19,0		0,25	19,5
19,5		0,25	20,0
20,0		0,25	20,5
20,5	SOGX 07....	0,25	21,0
21,0		0,25	21,5
21,5		0,25	22,0
22,0		0,25	22,5
22,5		0,25	23,0
23,0		0,25	23,5
23,5	SOGX 08....	0,25	24,0
24,0		0,25	24,5
24,5		0,25	25,0
25,0		0,25	25,5
25,5		0,25	26,0
26,0		0,25	26,5
26,5	SOGX 09....	0,25	27,0
27,0		0,25	27,5
27,5		0,25	28,0
28,0		0,25	28,5
28,5		0,25	29,0
29,0		0,25	29,5
29,5		0,25	30,0
30,0		0,25	30,5
31,0	SOGX 10....	0,25	31,5
32,0		0,25	32,5
33,0		0,25	33,5
34,0	SOGX 11....	0,25	34,5
35,0		0,25	35,5
36,0		0,25	36,5
37,0		0,25	37,5
38,0	SOGX 12....	0,25	38,5
39,0		0,25	39,5
40,0		0,25	40,5
41,0		0,25	41,5
42,0		0,25	42,5
43,0	SOGX 13....	0,25	43,5
44,0		0,25	44,5
45,0		0,25	45,5
46,0		0,25	46,5
47,0	SOGX 08....	0,25	47,5
48,0		0,25	48,5
49,0		0,25	49,5
50,0		0,25	50,5
51,0		0,25	51,5
52,0		0,25	52,5

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
53,0	SOGX 10....	0,25	53,5
54,0		0,25	54,5
55,0		0,25	55,5
56,0		0,25	56,5
57,0		0,25	57,5
58,0		0,25	58,5
59,0		0,25	59,5
60,0		0,25	60,5
61,0		0,25	61,5
62,0		0,25	62,5
63,0		0,25	63,5
64,0		0,25	64,5
65,0		0,25	65,5

KUB Pentron CS

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
64,0	SOGX 10....	0,25	64,5
65,0		0,25	65,5
66,0		0,25	66,5
67,0		0,25	67,5
68,0		0,25	68,5
69,0		0,25	69,5
70,0	SOGX 11....	0,25	70,5
71,0		0,25	71,5
72,0		0,25	72,5
73,0		0,25	73,5
74,0		0,25	74,5
75,0		0,25	75,5
76,0	SOGX 12....	0,25	76,5
77,0		0,25	77,5
78,0		0,25	78,5
79,0		0,25	79,5
80,0		0,25	80,5
81,0		0,25	81,5
82,0		0,25	82,5
83,0		0,25	83,5
84,0		0,25	84,5
85,0	SOGX 13....	0,25	85,5
86,0		0,25	86,5
87,0		0,25	87,5
88,0		0,25	88,5
89,0		0,25	89,5
90,0		0,25	90,5
91,0		0,25	91,5
92,0		0,25	92,5
93,0		0,25	93,5
94,0		0,25	94,5
95,0		0,25	95,5
96,0		0,25	96,5

The maximum radial X-offset affects the cutting force balance of the drill, therefore, the use of lower feed rates is recommended!

Maximum adjustment range (X) during solid drilling / from the centre for stationary applications – KUB Trigon

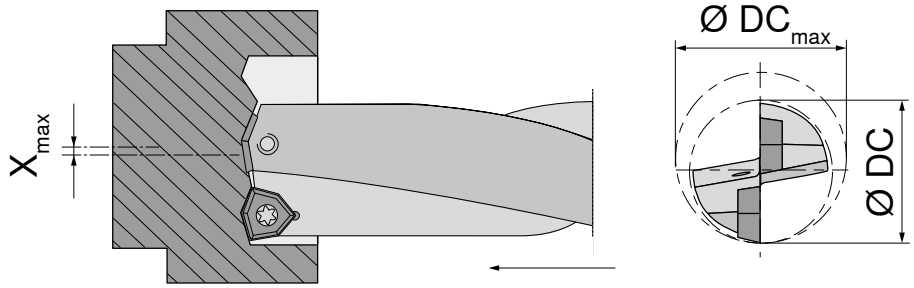

At max. offset X_{max} the hole will be:
$D_{max} = D + 2X_{max}$
e.g. for D = 20 mm, X_{max} = 0.5 mm:
$D_{max} = D + 1.0 = 21.0$ mm

KUB Trigon

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
14,0	WOEX 03....	0,5	15,0
15,0		0,5	16,0
16,0		0,5	17,0
17,0		0,5	18,0
18,0		0,5	19,0
19,0		0,5	20,0
20,0	WOEX 04....	0,5	21,0
21,0		0,5	22,0
22,0		0,5	23,0
23,0		0,5	24,0
24,0		0,5	25,0
25,0	WOEX 05....	0,5	26,0
26,0		1,0	28,0
27,0		1,5	30,0
28,0		1,5	31,0
29,0		1,5	32,0
30,0		1,25	32,5
31,0		1,25	33,5
32,0		1,0	34,0
33,0		0,5	34,0
34,0		0,5	35,0
35,0		0,5	36,0
36,0		0,5	37,0
37,0	WOEX 06....	1,5	40,0
38,0		1,5	41,0
39,0		1,5	42,0
40,0		1,5	43,0
41,0		1,5	44,0
42,0		1,5	45,0
43,0		1,0	45,0
44,0		0,5	45,0

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
45,0	WOEX 08....	1,5	48,0
46,0		1,5	49,0
47,0		1,5	50,0
48,0		1,5	51,0
49,0		1,5	52,0
50,0		1,5	53,0
51,0		1,5	54,0
52,0		1,5	55,0
53,0		1,0	55,0
54,0		0,5	55,0
55,0	WOEX 10....	1,5	58,0
56,0		1,5	59,0
57,0		1,5	60,0
58,0		1,5	61,0
59,0		1,5	62,0
60,0		1,5	63,0
61,0		1,5	64,0
62,0		1,5	65,0
63,0		1,5	66,0
64,0		1,5	67,0
65,0		1,5	68,0
66,0		1,5	69,0
67,0		1,25	69,5
68,0		1,0	70,0
69,0	WOEX 12....	1,5	72,0
70,0		1,5	73,0
71,0		1,5	74,0
72,0		1,5	75,0
73,0		1,5	76,0
74,0		1,5	77,0
75,0		1,5	78,0
76,0		1,5	79,0
77,0		1,5	80,0
78,0		1,5	81,0
79,0		1,5	82,0
80,0		1,0	82,0
81,0		0,75	82,5
82,0		0,5	83,0

The maximum radial X-offset affects the cutting force balance of the drill, therefore, the use of lower feed rates is recommended!

Maximum off set (X) for drilling into full material / with stationary applications – MaxiDrill 900

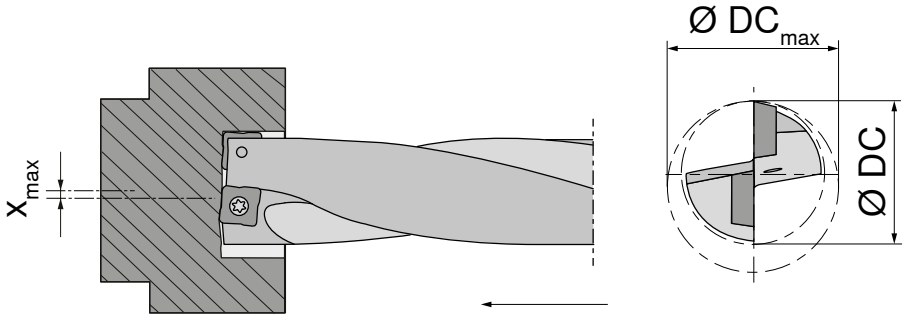

At max. offset X_{max} the hole will be:
$D_{max} = D + 2X_{max}$
e.g. for D = 20 mm, X_{max} = 0.20 mm:
$D_{max} = D + 0.4 = 20.4$ mm

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
12,0	SONT 03....	0,50	13,0
12,5		0,40	13,3
13,0		0,35	13,7
13,5		0,30	14,1
14,0	SONT 04....	0,35	14,7
14,5		0,25	15,0
15,0		0,20	15,4
15,5		0,15	15,8
16,0	SONT 05....	0,40	16,8
16,5		0,35	17,2
17,0		0,30	17,6
17,5		0,25	18,0
18,0	SONT 06....	0,50	19,0
18,5		0,40	19,3
19,0		0,35	19,7
19,5		0,25	20,0
20,0		0,20	20,4
20,5		0,15	20,8
21,0	SONT 07....	0,35	21,7
21,5		0,30	22,1
22,0		0,25	22,5
22,5		0,15	22,8
23,0		0,15	23,3
23,5		0,10	23,7
24,0	SONT 08....	0,65	25,3
24,5		0,55	25,6
25,0		0,55	26,1
25,5		0,40	26,3
26,0		0,35	26,7
26,5		0,30	27,1
27,0		0,25	27,5
27,5		0,15	27,8
28,0	SONT 09....	0,90	29,8
28,5		0,80	30,1
29,0		0,75	30,5
29,5		0,70	30,9
30,0		0,60	31,2
30,5		0,55	31,6
31,0		0,45	31,9
31,5		0,40	32,3
32,0		0,30	32,6

Ø DC mm	Insert size	X_{max} mm	Ø DC_{max} mm
32,5	SONT 10....	0,80	34,1
33,0		0,80	34,6
33,5		0,65	34,8
34,0		0,60	35,2
34,5		0,50	35,5
35,0		0,45	35,9
35,5		0,35	36,2
36,0		0,35	36,7
36,5		0,20	36,9
37,0	SONT 12....	1,00	39,0
38,0		0,85	39,7
39,0		0,70	40,4
40,0		0,50	41,0
41,0		0,35	41,7
42,0	SONT 13....	0,95	43,9
43,0		0,80	44,6
44,0		0,60	45,2
45,0		0,45	45,9
46,0		0,30	46,6
47,0	SONT 15....	1,80	50,6
48,0		1,65	51,3
49,0		1,50	52,0
50,0		1,35	52,7
51,0		1,15	53,3
52,0		0,95	53,9
53,0		0,80	54,6
54,0		0,60	55,2
55,0	SONT 17....	2,10	59,2
56,0		1,90	59,8
57,0		1,75	60,5
58,0		1,55	61,1
59,0		1,35	61,7
60,0		1,15	62,3
61,0		1,00	63,0
62,0		0,85	63,7
63,0		0,65	64,3

The maximum radial X-offset affects the cutting force balance of the drill, therefore, the use of lower feed rates is recommended!

Technical data for turning – MaxiDrill 900

Insert size	$a_{p\,max.}$ in mm	f in mm/rev.
SONT 03	0,40–1,50	0,08–0,22
SONT 04	0,40–1,80	0,09–0,27
SONT 05	0,60–2,40	0,10–0,30
SONT 06	0,60–2,80	0,11–0,34
SONT 07	0,60–3,40	0,13–0,38
SONT 08	0,70–4,20	0,15–0,41

Insert size	$a_{p\,max.}$ in mm	f in mm/rev.
SONT 09	0,70–4,50	0,16–0,42
SONT 10	0,70–4,80	0,17–0,44
SONT 12	0,90–5,50	0,18–0,45
SONT 13	1,00–6,00	0,20–0,45
SONT 15	1,20–6,40	0,21–0,46
SONT 17	1,20–6,70	0,21–0,47

Coding example indexable insert drilling

System		Length		Bore diameter		Direction of rotation		Insert size		Machine connection and size
KUB-P	.	3D	.	215	.	R	.	07	–	ABS 50
KUB-P	.	3D	.	290	.	R	.	04	–	PSC 63
KUB-P.GH-CS	.	3D	.	76-78	.	R			–	ABS 80
MD-900	.	4D	.	240	.	R	.	08	–	C 32
KUB-T	.	2D	.	350	.	R	.	05	–	K 32
KUB-T	.	2D	.	350	.	L	.	05	–	ABS 50
KUB-C.GH	.	4D	.	320	.	R			–	ABS 50

KUB-P = KUB Pentron	215 = 21,5 mm	R = right	ABS50 = ABS adapter size 50
	290 = 29,0 mm	R = right	PSC63 = Polygon shank taper size 63
KUB-P.GH-CS = KUB Pentron CS	76-78 = 76-78 mm	R = right	ABS80 = ABS adapter size 80
MD-900 = MaxiDrill 900	240 = 24,0 mm	R = right	C32 = Cylindrical shank Ø 32.0 mm
KUB-T = KUB Trigon	350 = 35,0 mm	R = right	K32 = Cylindrical shank with combi clamping flat Ø 32.0 mm
		L = Left-hand	ABS50 = ABS adapter size 50
KUB-C.GH = KUB Centron	320 = KLG 32	R = right	ABS50 = ABS adapter size 50

The KOMET number key for KOMET Performance indexable inserts (W80 ... / W29 ...) can be found in **Chapter 5 – Spindle tools on page 75**.

Recommended coolant pressure and coolant flow

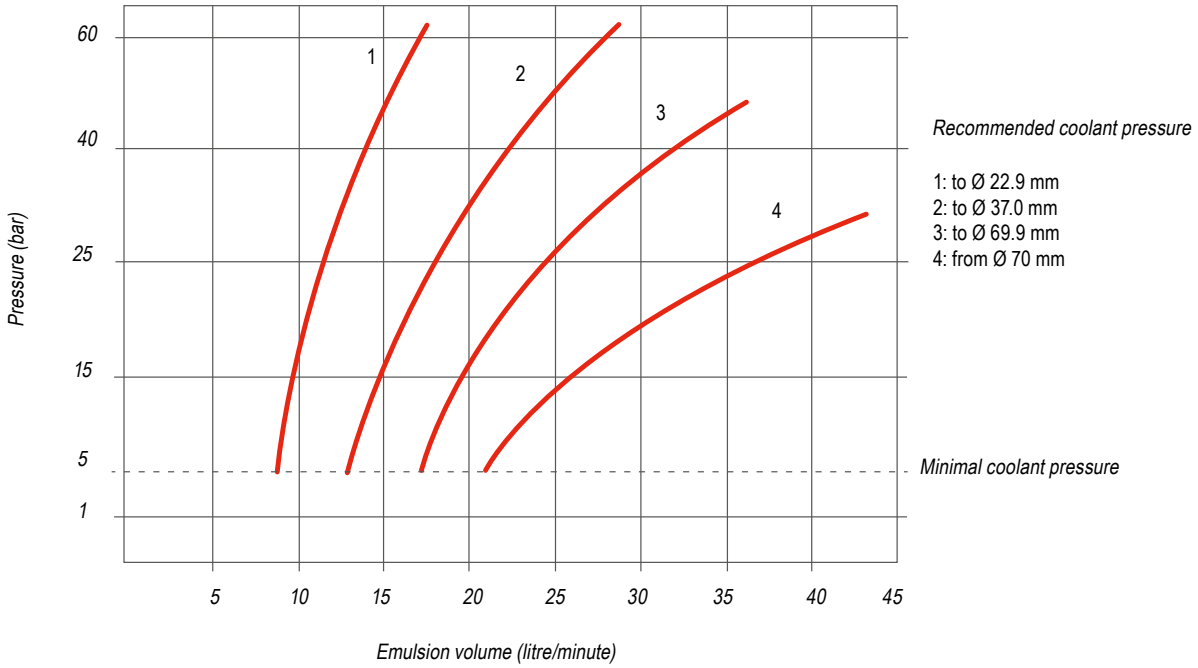

Indexable insert drilling – problems / possible causes / solutions

Rotating and stationary application

Short service life / types of wear of indexable inserts

- ▲ Cutting speed too high → select the correct cutting speed
- ▲ Insert grade selection has too little wear resistance → select a wear resistant grade
- ▲ Tool overhang too large → if possible, use a shorter tool
- ▲ Damaged insert seat → check tool, replace if necessary
- ▲ Clamping device stability too low → increase stability



Hole tapers in

- ▲ Chip jam on the outer cutting edge → use a different chip breakage geometry, increase the feed if necessary
- ▲ Material very soft → increase the cutting speed, reduce the feed.
  Use a positive cutting edge geometry



Hole tapers out

- ▲ Chip jam on the inner cutting edge → use a different chip breakage geometry, increase the feed if necessary



Poor surface quality

- ▲ Poor chip evacuation → optimise the cutting parameters: Increase the cutting speed, reduce the feed



Built-up edge

- ▲ Cutting speed too low → increase cutting speed
- ▲ Indexable insert too negative → use positive geometry
- ▲ Unsuitable coating → select the correct coating



Friction marks on the tool shank

- ▲ Bore diameter too small → check the setting
- ▲ Chip evacuation problems → optimise the cutting parameters, check the geometry of the indexable insert
- ▲ Cutting radius too high → use the correct cutting radius

Stationary application



Edge breakage on the inner cutting edge

- ▲ Centre height of the tool too high/too low → adjust tool turret/adapter if necessary → Recalibrate the machine
- ▲ Indexable insert grades interchanged → use correct indexable insert
- ▲ Feed too high → reduce feed
- ▲ Indexable insert grade too brittle → use a tougher indexable insert grade
- ▲ Incorrect indexable insert geometry → if necessary use a geometry with a chamfered cutting edge



Edge breakage on the outer cutting edge

- ▲ Feed too high → reduce feed
- ▲ Interrupted cut → switch to a tougher grade of indexable insert
- ▲ Cutting radius too small → use an indexable insert with a larger cutting radius



Hole too small / too large

- ▲ Machine is not in the X-0 position → move axis to correct position
- ▲ Machine axis has been moved → recalibrate the machine

Rotating application



Edge breakage on the inner cutting edge

- ▲ Indexable insert grades interchanged → use correct indexable insert
- ▲ Feed too high → reduce feed
- ▲ Indexable insert grade too brittle → use a tougher indexable insert grade
- ▲ Incorrect indexable insert geometry → if necessary use a geometry with a chamfered cutting edge



Edge breakage on the outer cutting edge

- ▲ Feed too high → reduce feed
- ▲ Interrupted cut → switch to a tougher grade of indexable insert
- ▲ Cutting radius too small → use an indexable insert with a larger cutting radius



Hole too small / too large when using adjustable tools

- ▲ Incorrect cutting radius used → use the correct cutting radius
- ▲ Incorrect setting → use the correct tool setting
- ▲ Increase cutting fluid supply

KUB Centron – notes on drilling technology

1.



Spot drilling on uneven surfaces (casting surfaces)

- ▲ Generally possible
- ▲ Reduce feed when spot drilling

2.



Spot drilling on angled surfaces

- ▲ The spot drilling location must be spot faced in advance
- ▲ Avoid chips jamming on the drill shank

3.



Angled drill exit

- ▲ Possible under certain conditions
- ▲ If necessary, reduce feed
- ▲ Drilling angle max. 3°

4.

Spot drilling on convex surfaces

- ▲ Central spot drilling possible with reduced feed
- ▲ If the spot drilling location is outside the centre of the radius, spot facing is required

5.



Drilling through a transverse hole

- ▲ Halve the feed for interrupted cut
- ▲ Transverse hole max. 1/3 of the bore diameter
- ▲ Eccentric transverse hole not possible

6.



Spot drilling in a pre-op or large centring hole

- ▲ Possible under certain conditions
- ▲ If necessary, reduce feed
- ▲ In the case of a large centre, face turning is required in advance
- ▲ If necessary, optimise the basic setting of the centring tip

7.



Drilling a cavity

- ▲ Not possible

8.



Spot drilling on an edge

- ▲ Not possible with 4xD tools
- ▲ Preparation required due to undefined spot drilling location (spot facing, face milling)
- ▲ Then continue as described under Point 1

9.



Spot drilling on a forging/welding/casting seam

- ▲ Reduce feed when spot drilling
- ▲ If necessary, carry out facing in advance

10.



Drilling through stacks

- ▲ Not possible

11.



Blind hole

- ▲ Possible
- ▲ Set guide rails 0.5 mm below actual Ø

12.



Adjustable

- ▲ Adjustable from a diameter of 65 mm

KUB Centron – problems / possible causes / solutions

Rotating and stationary application

Short service life / types of wear of indexable inserts

- ▲ Cutting speed too high → select the correct cutting speed
- ▲ Grade has too little wear resistance → select a wear-resistant grade
- ▲ Tool overhang too large → if possible, use a shorter tool
- ▲ Damaged insert seat → check tool, replace if necessary
- ▲ Clamping device stability too low → increase stability



Hole tapers in

- ▲ Chip jam on the outer cutting edge → use a different chip breakage geometry, increase the feed if necessary
- ▲ Material very soft → increase the cutting speed, reduce the feed
- ▲ Use positive cutting edge geometry
- ▲ Axial adjustment of the centring tip not optimal → adjust according to the setting sheet in the operating instructions



Hole tapers out

- ▲ Chip jam on the inner cutting edge → use a different chip breakage geometry, increase the feed if necessary



Poor surface quality

- ▲ Poor chip evacuation → optimise the cutting parameters: Increase the cutting speed, reduce the feed



Built-up edge

- ▲ Cutting speed too low → increase cutting speed
- ▲ Indexable insert too negative → use positive geometry
- ▲ Unsuitable coating → select the correct coating



Friction marks on the tool shank

- ▲ Bore diameter too small → check the setting
- ▲ Chip evacuation problems → optimise the cutting parameters, check the geometry of the indexable insert
- ▲ Cutting radius too large → use the correct cutting radius
- ▲ Chips stuck on the supporting element, broken supporting elements, the supporting element does not have to be used for base elements of < 6xD

Stationary application



Significant wear on one side of the centring tip

- ▲ Tool not centred → tool turret/adapter may have moved → recalibrate the machine



Single-sided retraction scoring

- ▲ Tool not centred → tool turret/adapter may have moved → recalibrate the machine



Edge breakage on the outer cutting edge

- ▲ Feed too high → reduce feed
- ▲ Interrupted cut → switch to a tougher grade of indexable insert
- ▲ Cutting radius too small → use an indexable insert with a larger cutting radius



Hole too small / too large

- ▲ Machine is not in the X-0 position → move axis to correct position
- ▲ Machine axis has been moved → recalibrate the machine

Rotating application

Significant wear on one side of the centring tip

- ▲ Guidance insufficient → check length adjustment of the centring tip



Edge breakage on the outer cutting edge

- ▲ Feed too high → reduce feed
- ▲ Interrupted cut → switch to a tougher grade of indexable insert
- ▲ Cutting radius too small → use an indexable insert with a larger cutting radius



Hole too small / too large

- ▲ Incorrect cutting radius used → use the correct cutting radius
- ▲ Incorrect setting → use the correct tool setting

Chip breakers

		KOMET \ Performance		KOMET \ Standard
		WOEX	SOGX	SONT
-01	▲ Universal geometry with stable cutting edge, suitable for a wide range of materials ▲ Can be used for centre and periphery (BK6115 -01: Recommended for periphery only)			
-03	▲ Geometry for chip breakage problems with excellent chip control even at low feeds ▲ WOEX BK8425 -03: Can be used for periphery only ▲ SOGX BK8430 -03: Suitable for centre and periphery ▲ Main application in long-chipping materials as well as low alloy and stainless steels			
-11	▲ Highly positive, minimally rounded chip breaker ▲ For soft cutting use ▲ Main application in aluminum			
-13	▲ Positive geometry, the dome-shaped chip breaker results in more controlled breaking of the chips ▲ Can be used for centre and periphery ▲ Also suitable for unstable machining conditions due to low cutting forces and power consumption ▲ Can be used with a wide range of materials			
-21	▲ Highly positive, soft-cutting geometry ▲ Can be used for centre and periphery ▲ BK7935: Can be used for periphery only ▲ Lower cutting forces and reduced power consumption ▲ Main application (depending on grade) in non-ferrous metals, steels and stainless steels, extended application range also for titanium alloys			
-32	▲ Minimised burr formation on entry and exit of hole ▲ Reliable separation of disc-shaped residual material when the drill exits the hole ▲ Suitable for a wide range of materials			
-34	▲ High-feed geometry ▲ Extremely sturdy indexable insert ▲ Requires higher drive power and stable setup ▲ Designed specially for steel and cast iron materials			
-M30	▲ Universal geometry ▲ Stable indexable insert, also suitable for high feeds ▲ CTPP430: Can be used for centre and periphery ▲ CTCP420: Only suitable for periphery			

Further indexable inserts can be found in our online shop
cuttingtools.ceratizit.com

Grades Overview

CTPP430

DRAGONSKIN

- Carbide, TiAlN-coated
- ISO | **P30** | **M25** | S25 | K30 | N25
- The universal high-performance grade for steel, austenitic steel and heat-resistant alloys.

CTCP420

DRAGONSKIN

- Carbide, TiCN-Al_2O_3-coated
- ISO | **P20** | **K20**
- The wear-resistant solution for steel and cast iron materials at high cutting speeds.

BK7710

- Carbide, TiB_2-coated
- ISO | **N10** | S10 | O10
- The wear-resistant grade with optimum cutting characteristics to prevent built-up edge formation for machining aluminium and titanium alloys.

BK7615

- Carbide, TiCN-Al_2O_3-coated
- ISO | **K15**
- Highly productive grade with extreme edge stability for wet and dry machining of all cast iron materials

BK62

- Carbide, TiN-TiCN-Al_2O_3-coated
- ISO | **K15** | H15
- Special carbide grade for machining cast iron materials at high cutting speeds. Not suitable for machining aluminium materials.

BK79

- Carbide, TiAlN-coated
- ISO | **P40** | **M35** | **K25** | N30
- Universally applicable grade with high wear-resistance
- low to medium cutting speed for roughing and finishing as well as interrupted cut

BK8425

- Carbide, TiAlN/TiN-coated
- ISO | **P25** | **M25** | **K25** | N25 | **S25** | H25
- Universally applicable grade with increased wear resistance thanks to the innovative PVD coating in a multilayer design.

BK8430

- Carbide, TiAlN/TiN-coated
- ISO | **P25** | **M25** | **K25** | N25 | **S25** | H25
- Fine-grain grade with high wear resistance
- Extreme edge stability and maximum wear resistance in the middle and top speed range

BK6115

- Carbide, TiCN-TiN-Al_2O_3-coated
- ISO | **P20** | **M20** | **K20** | H20
- High-quality, surface-treated coating for machining cast iron materials under normal to stable conditions and high cutting speeds.

BK7935

- Carbide, AlTiN-coated
- ISO | **P35** | **M30** | **K30** | N30 | **S30** | O30
- The tough carbide grade for machining stainless steel and acid-resistant steels as well as special alloys.

BK77

- Carbide, TiN-coated
- ISO | **S10** | H10 | O10
- The wear-resistant carbide grade for machining aluminum alloys, superalloys and plastics at medium cutting speeds.

Application

Grade designation	Standard designation	ISO application range	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O
BK6115	HC-P20	01 05 10 15 20 25 30 35 40 45 50	●						
	HC-M20			●					
	HC-K20				●				
	HC-H20							○	
BK8425	HC-P25		●						
	HC-M25			●					
	HC-K25				●				
	HC-N25					○			
	HC-S25						●		
	HC-H25							○	
BK8430	HC-P30		●						
	HC-M25			●					
	HC-K25				●				
	HC-N25					○			
	HC-S25						●		
	HC-H25							○	
BK7935	HC-P35		●						
	HC-M30			●					
	HC-S30						●		
	HC-K30				●				
	HC-N30					○			
	HC-O30								○
BK7710	HC-N10					●			
	HC-S10						○		
	HC-O10								○
CTCP420 DRAGONSKIN	HC-P20		●						
	HC-K20				●				
CTPP430 DRAGONSKIN	HC-P30		●						
	HC-M25			●					
	HC-S25						○		
	HC-N25					○			
	HC-K30				○				
BK7615	HC-K15				●				
BK62	HC-K15				●				
	HC-H15							○	
BK77	HC-S10						●		
	HC-H10							○	
	HC-O10								○
BK79	HC-P40		●						
	HC-M35			●					
	HC-K25				●				
	HC-N30					○			

● **Main Application**
○ Extended application

wear-resistant v_c+ ◯ ◌ v_c– tough

New products for machining technicians

NEW Expansion of REAMAX TS / Monomax



- Expansion of the REAMAX TS and Monomax range with a Monomax version in two lengths (3xD and 5xD) and a REAMAX TS reaming head variant
- With coated carbide blanks – ideal for interrupted cuts: DBG-P ASG 3000
- Specially designed for through hole machining of cast iron and steel materials

Expansion REAMAX TS → Page 10
Expansion Monomax short → Page 22
Expansion Monomax long → Page 25

NEW Machine reamers sim. DIN 8093-A / -B

- Extremely irregular pitch
- Universal solid carbide reamer without thro' coolant

→ Page 48

NEW 90° Countersink with irregular pitch, DIN 335-C



- All sizes with 3 cutting edges and extremely irregular pitch, resulting in quiet running, excellent roundness and chatter-free countersinking giving the highest surface quality
- TiN coating and special HPC-TiN coating
- For a very long service life in almost all materials
- Greatly reduced axial and radial forces
- For DIN ISO 7721 and DIN 7991 countersunk head screws

Solid carbide version → Page 63
HSS version → Page 65

NEW Indexable insert countersink for counterbores

- Universal application and maximum service life thanks to use of tried-and-tested WOEX indexable inserts (grade: BK8425 / K10; chip breaker -01)
- For creating countersinks according to DIN 974
- With thro' coolant supply

→ Page 57+58

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Selection guide – reamers	5
Reamers Toolfinder	6+7
Contents overview – Countersinks	8
Product range – Reamers	
Solid carbide – high speed reamers	9–42
Solid carbide – Reamers	43–48
HSS – Reamers	49–56
Product range – Countersinks	57–68
Technical Information	
Cutting Data	69–95
REAMAX TS assembly and operating instructions	96+97
Problems / possible causes / solutions	98
Types of wear	99
Cutting edge geometries and surface quality	100
Tolerance classes covered with 1/100 reamer	101
Manufacturer‘s tolerance and coatings	102
Chip Breaker Types and Grade Overview	103

KOMET \ Performance

Premium quality tools for high performance.

The premium quality tools from the **KOMET Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

KOMET \ Standard

Quality tools for standard applications.

The quality tools of the **KOMET Standard** product line are high quality, high performance, reliable and enjoy the highest level of trust among our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Coolant supply version

central internal coolant

lateral internal coolant

Shank

Plain cylindrical shank

Morse taper

Cylindrical shank with lateral driving face „Weldon“

Applications

Through hole

Blind hole

Through hole with transverse hole/ interrupted cut

Blind hole with transverse hole/interrupted cut

ZEFP = Number of flutes

● = Main Application

○ = Extended application

Selection guide – reamers

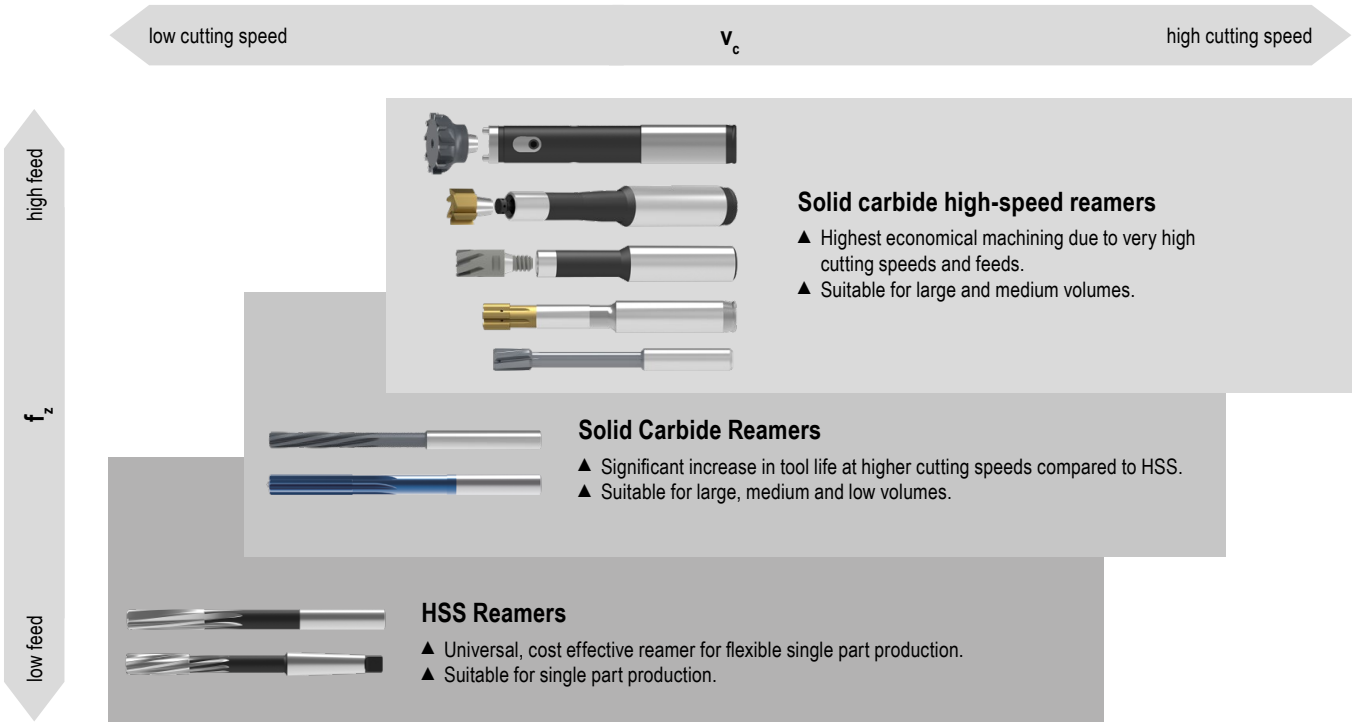

4

Overview of solid carbide high-speed reamers

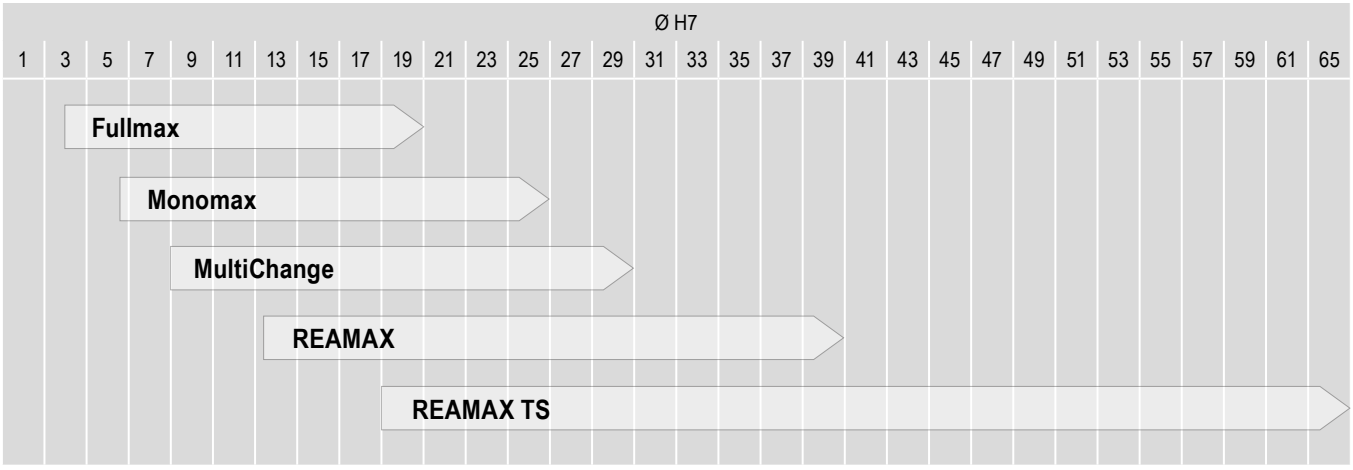

	mono	modular
fixed	Fullmax	MultiChange, REAMAX
adjustable	Monomax	REAMAX TS

Toolfinder – Reamers

Solid carbide – high speed reamers	REAMAX TS			▲ highly flexible and economical replaceable head system ▲ all common materials ▲ can be adjusted in µm range
				▲ holder available in 3xD and 5xD ▲ holder type DAH Zero available in 3xD and 5xD
	REAMAX			▲ Exchangeable head system, optimised for use with minimum quantity lubrication (MQL) ▲ Maximum changeover precision guaranteed thanks to face and taper contact
				▲ holder available in 3xD and 5xD
	MultiChange			▲ Flexible quick change system for reaming, countersinking and milling ▲ A high level of changeover precision guaranteed thanks to face and taper contact
				▲ stable holder in solid carbide and steel, from short to long
	Monomax			▲ adjustable monoblock reamer in 3xD and 5xD ▲ regrinding and re-tipping on the base body ▲ all common materials
	Fullmax			▲ High-speed reamer in shorter and longer version ▲ Reamers for machining steel, stainless and acid-resistant steels, cast materials, aluminium and hardened materials up to 63 HRC ▲ Extremely irregular pitch ▲ Standard shank ~ DIN 6535 HA
Solid carbide – Reamers	NC	NC 100		▲ universal solid carbide reamer without thro' coolant ▲ extremely irregular pitch ▲ DIN 6535 HA shank
	NC	NC 100H		▲ Solid carbide reamer without thro' coolant suitable for use in hardened materials ▲ Standard shank ~ DIN 6535 HA
	N			▲ universal solid carbide reamer without thro' coolant ▲ extremely irregular pitch
HSS – Reamers	NC	NC 100		▲ HSS-E NC machine reamer ▲ DIN 1835 A shank
	N	N 100		▲ HSS-E machine reamer
	AR	AR 100		▲ HSS-E automatic machine reamer DIN 8089
	N			▲ HSS-e machine reamer DIN 208 ▲ with Morse taper
	H			▲ HSS hand reamer with cylindrical shank DIN 206

	Hole diameter (mm) Ø DC	Standard Tolerance	Through hole	Blind hole	Int. coolant supply	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metals	S Heat-resistant	H Tempered steel	O Non-metal materials	KOMET \ Performance	KOMET \ Standard
	18,00–65,00	H7 1/100			✓	●	●	●	●			○	9–11	
					✓								12+13	
	12,50–40,00	H7 1/100			✓	●	●	●	●		●	○	14+15	
					✓								16	
	8,00–30,20	H7 1/100			✓	●	●	●	●				17–19	
					✓								→ Catalogue – Clamping technology, Chapter 16 Accessories	
short version	5,60–25,89	H7 1/100			✓	●	●	●	●			○	20–23	
long version	5,60–25,89	H7 1/100			✓	●	●	●	●			○	24–26	
short version	4,00–16,00 2,96–20,05	H7 1/100			✓	●	●	●	○	○	○		27–32	
long version	4,00–16,00 2,96–20,05	H7 1/100			✓	●	●	●	●	○	●	○	33–42	
	2,00–30,00 0,59–12,05	H7 1/100				●	○	●	●	○	○	●	43–45	
	0,98–12,05	H7				○	○	○			●		46+47	
	2,00–12,00	H7				●		○	●					48
	1,50–20,00 0,95–12,00	H7 1/100				●		●	●			●	49+50	
	1,00–20,00 0,95–12,00	H7 1/100				●	○	●	●	○		●		51–53
	4,00–20,00 3,76–12,00	H7 1/100				●	○	●	●	○		●		54+55
	16,00–50,00	H7				●	○	●	●	○		●		56
	3,00–30,00	H7				●	○	●	●	○		●		56

4

Countersinks Overview

	Tool type	Coating	Hole diameter (mm) Ø DC	Countersinking angle SIG	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	KOMET \ Performance	KOMET \ Standard
Indexable Insert Counterbore Tool													
	WPS		10–48	180°	●	●	●	●	●	○	●	57+58	
Insert countersink 60°/90°													
	WPS		16,5–25,5 19,0–37,0	60° 90°	●	●	●	●	●	○	●	59–61	
HSS – Counterbores													
			6,0–20,0	180°	●	●	●	●	○		●		62
Solid Carbide Countersinks													
	N	HPC-TiN	6,3–31,0	90°	●	○	●	●	○	○	○	63	
	N		12,5–25,0	60°	●	○	●	●	○	○			64
	N		10,4–31,0	90°	●	○	●	●	○	○			64
HSS Countersinks													
	N	TiN	4,3–31,0	90°	●	○	●	●	○	○	○	65	
	N		4,3–31,0	90°	●	○	●	●	○		●		66
	N	TiN	5,0–31,0	90°	●	○	●	●	○	○	●		66
	N	TiAlN	5,0–31,0	90°	●	○	●	●	○	○	●		66
	VA	TiAlN	6,3–31,0	90°	○	●	○	○	○	○	●		66
	AL		6,3–31,0	90°	○	○	○	●	○		●		66
			6,3–25,0	60°	●	○	●	●	○		●		67
	N		30,0–80,0	90°	●	○	●	●	○		●		67
			6,3–25,0	120°	●	○	●	●	○		●		68
Deburring Countersink													
			6,3–28,0	90°	●	○	●	●	○		●		68
		TiN	6,3–28,0	90°	●	○	●	●	○	○	●		68

REAMAX TS – Selection guide

Ø 18 – 65 mm										
Article no.			40 597 …	40 544 …	40 577 …	40 521 …	40 526 …	40 539 …	40 585 …	40 571 …	40 580 …
KOMET no.			75J.93	75J.93	75J.65	75J.65	75J.17	75H.93	75H.65	75H.65	75H.17
Cutting edge geometry			ASG4000	ASG3000	ASG3000	ASG0106	ASG0706	ASG3000	ASG3000	ASG0106	ASG0706
Lead angle			25°	45°	45°	45°	45°/8°	45°	45°	45°	45°/8°
Grade / coating			DST	DST	DBG-P	DBG-P	DBC	DST	DBG-P	DBG-P	DBC
Preferred type available			✓	✓	✓	✓	✓	✓	✓	✓	
Application			Through hole					Blind hole			
Material sub-group		Index									
P	Non alloyed steel	P.1.1	●	●	●			●	●		
		P.1.2	●	●	●			●	●		
		P.1.3	●	●	●			●	●		
		P.1.4	●	●	●			●	●		
		P.1.5	●	●	●			●	●		
	Low alloyed steel	P.2.1	●	●	●			●	●		
		P.2.2	●	●	●			●	●		
		P.2.3	●	●	●			●	●		
		P.2.4	●	●	●			●	●		
	High-alloy steel and high-alloy tool steel	P.3.1				●				●	
		P.3.2				●				●	
		P.3.3				●				●	
	Stainless steel	P.4.1				●				●	
		P.4.2				●				●	
M	Stainless steel	M.1.1				●				●	
		M.2.1				●				●	
		M.3.1				●				●	
K	Grey cast iron	K.1.1			●				●		
		K.1.2			●				●		
	Spherulitic graphite cast iron	K.2.1	●	●	●			●	●		
		K.2.2	●	●	●			●	●		
	Malleable iron	K.3.1		●	●			●	●		
		K.3.2	●	●	●			●	●		
N	Aluminum alloys	N.1.1					●				●
		N.1.2					●				●
	Cast Aluminium Alloys	N.2.1					●				●
		N.2.2					●				●
		N.2.3					●				●
	Copper and copper alloys (Bronze, Brass)	N.3.1		○				○			
		N.3.2		○				○			
		N.3.3									
	Magnesium alloys	N.4.1					●				●
O	Non-metal materials	O.1.1									
		O.1.2									
		O.2.1									
		O.2.2									
		O.3.1					○				○

● = Main application
○ = Additional range of application

REAMAX TS – Replaceable reaming heads

- ▲ Up to tolerance class IT 6 with absolute process security, from the first hole
- ▲ Maximum changeover precision guaranteed
- ▲ High precision grind for maximum quality
- ▲ Can be adjusted for the smallest hole tolerances
- ▲ Interface enables head change in the machine
- ▲ Retraction from the hole at 3-4x feed rate
- ▲ KLG = Coupling size



					DST	DBG-P	DBC	NEW DBG-P	DST
					75J.93 PLGANG 25° ASG4000 CERMET Through hole	75J.65 PLGANG 45° ASG0106 HM Through hole	75J.17 PLGANG 45/8° ASG0706 HM Through hole	75J.65 PLGANG 45° ASG3000 HM Through hole	75J.93 PLGANG 45° ASG3000 CERMET Through hole
					40 597 ...	**40 521 ...**	**40 526 ...**	**40 577 ...**	**40 544 ...**
DC H7 mm	L mm	LPR mm	ZEFP	KLG	EUR U3/4E	EUR U3/4E	EUR U3/4E	EUR U3/4E	EUR U3/4E
18,00	6	20	6	1	417,00 18000	417,00 18000	417,00 18000	417,00 18000	417,00 18000
18,01 - 19,99	6	20	6	1	491,30 xxxx 1)	491,30 xxxx 1)	491,30 xxxx 1)	491,30 xxxx 1)	491,30 xxxx 1)
20,00	6	20	6	2	427,70 20000	427,70 20000	427,70 20000	427,70 20000	427,70 20000
20,01 - 21,99	6	20	6	2	576,10 xxxx 1)	576,10 xxxx 1)	576,10 xxxx 1)	576,10 xxxx 1)	576,10 xxxx 1)
22,00	6	20	6	3	435,60 22000	435,60 22000	435,60 22000	435,60 22000	435,60 22000
22,01 - 23,99	6	20	6	3	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)
24,00	6	20	6	3	448,80 24000	448,80 24000	448,80 24000	448,80 24000	599,30 24000 1)
24,01 - 24,99	6	20	6	3	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)
25,00	6	20	6	3	448,80 25000	448,80 25000	448,80 25000	448,80 25000	448,80 25000
25,01 - 25,99	6	20	6	3	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)
26,00	6	20	6	3	466,10 26000	466,10 26000	599,30 26000 1)	466,10 26000	466,10 26000
26,01 - 26,99	6	20	6	3	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)	599,30 xxxx 1)
27,00 - 27,99	6	25	6	4	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)
28,00	6	25	6	4	466,10 28000	466,10 28000	466,10 28000	466,10 28000	466,10 28000
28,01 - 29,99	6	25	6	4	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)
30,00	6	25	6	4	487,40 30000	487,40 30000	487,40 30000	487,40 30000	487,40 30000
30,01 - 31,79	6	25	6	4	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)	624,00 xxxx 1)
31,80 - 31,99	6	25	8	4	652,50 xxxx 1)	652,50 xxxx 1)	652,50 xxxx 1)	652,50 xxxx 1)	652,50 xxxx 1)
32,00	6	25	8	4	504,60 32000	504,60 32000	504,60 32000	504,60 32000	504,60 32000
32,01 - 34,99	6	25	8	4	652,50 xxxx 1)	652,50 xxxx 1)	652,50 xxxx 1)	652,50 xxxx 1)	652,50 xxxx 1)
35,00	6	25	8	5	528,50 35000	528,50 35000	528,50 35000	528,50 35000	528,50 35000
35,01 - 39,99	6	25	8	5	713,80 xxxx 1)	713,80 xxxx 1)	713,80 xxxx 1)	713,80 xxxx 1)	713,80 xxxx 1)
40,00	6	25	8	5	559,00 40000	559,00 40000	559,00 40000	559,00 40000	559,00 40000
40,01 - 41,99	6	25	8	5	713,80 xxxx 1)	713,80 xxxx 1)	713,80 xxxx 1)	713,80 xxxx 1)	713,80 xxxx 1)
42,00	6	30	8	6	559,00 42000	559,00 42000	775,30 42000 1)	559,00 42000	559,00 42000
42,01 - 49,99	6	30	8	6	775,30 xxxx 1)	775,30 xxxx 1)	775,30 xxxx 1)	775,30 xxxx 1)	775,30 xxxx 1)
50,00	6	30	8	6	572,20 50000	572,20 50000	572,20 50000	572,20 50000	572,20 50000
50,01 - 51,99	6	30	8	6	775,30 xxxx 1)	775,30 xxxx 1)	775,30 xxxx 1)	775,30 xxxx 1)	775,30 xxxx 1)
52,00 - 53,99	8	35	10	7	859,80 xxxx 1)	859,80 xxxx 1)	859,80 xxxx 1)	859,80 xxxx 1)	859,80 xxxx 1)
54,00	8	35	10	7	644,00 54000 1)	644,00 54000 1)	859,80 54000 1)	859,80 54000 1)	644,00 54000 1)
54,01 - 65,00	8	35	10	7	859,80 xxxx 1)	859,80 xxxx 1)	859,80 xxxx 1)	859,80 xxxx 1)	859,80 xxxx 1)
P					●	●		●	●
M						●			
K					●			●	●
N							●		○
S									
H									
O							○		

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 70–72

For xxxx please indicate requested Ø in H7 in the order (e.g Ø 24.12 H7 → article no. 40 597 2412)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7)!
All heads are also available as fixed head variants (not adjustable) on request.

→ **Page 96+97**
Here you will find a detailed operating instruction.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

REAMAX TS – Replaceable reaming heads

- ▲ Up to tolerance class IT 6 with absolute process security, from the first hole
- ▲ Maximum changeover precision guaranteed
- ▲ High precision grind for maximum quality
- ▲ Can be adjusted for the smallest hole tolerances
- ▲ Interface enables head change in the machine
- ▲ Retraction from the hole at 3-4x feed rate
- ▲ KLG = Coupling size



	DST	DBG-P	DBC	DBG-P
	75H.93 PLGANG 45° ASG3000 CERMET Blind hole	75H.65 PLGANG 45° ASG0106 HM Blind hole	75H.17 PLGANG 45/8° ASG0706 HM Blind hole	75H.65 PLGANG 45° ASG3000 HM Blind hole
	40 539 ...	**40 571 ...**	**40 580 ...**	**40 585 ...**

DC H7 mm	L mm	LPR mm	ZEFP	KLG	EUR U3/4E		EUR U3/4E		EUR U3/4E		EUR U3/4E	
18,00	6	20	6	1	417,00	**18000**	417,00	**18000**	491,30	**18000**[1)]	491,30	**18000**
18,01 - 19,99	6	20	6	1	491,30	**xxxx** [1)]	491,30	**xxxx** [1)]	491,30	**xxxx** [1)]	491,30	**xxxx** [1)]
20,00	6	20	6	2	427,70	**20000**	427,70	**20000**	576,10	**20000**[1)]	576,10	**20000**
20,01 - 21,99	6	20	6	2	576,10	**xxxx** [1)]	576,10	**xxxx** [1)]	576,10	**xxxx** [1)]	576,10	**xxxx** [1)]
22,00	6	20	6	3	435,60	**22000**	435,60	**22000**	599,30	**22000**[1)]	599,30	**22000**
22,01 - 23,99	6	20	6	3	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]
24,00	6	20	6	3	448,80	**24000**	448,80	**24000**	599,30	**24000**[1)]	599,30	**24000**
24,01 - 24,99	6	20	6	3	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]
25,00	6	20	6	3	448,80	**25000**	448,80	**25000**	599,30	**25000**[1)]	599,30	**25000**
25,01 - 25,99	6	20	6	3	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]
26,00	6	20	6	3	466,10	**26000**	466,10	**26000**	599,30	**26000**[1)]	599,30	**26000**
26,01 - 26,99	6	20	6	3	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]	599,30	**xxxx** [1)]
27,00 - 27,99	6	25	6	4	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]
28,00	6	25	6	4	466,10	**28000**	466,10	**28000**	624,00	**28000**[1)]	624,00	**28000**
28,01 - 29,99	6	25	6	4	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]
30,00	6	25	6	4	487,40	**30000**	487,40	**30000**	624,00	**30000**[1)]	624,00	**30000**
30,01 - 31,79	6	25	6	4	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]	624,00	**xxxx** [1)]
31,80 - 31,99	6	25	8	4	652,50	**xxxx** [1)]	652,50	**xxxx** [1)]	652,50	**xxxx** [1)]	652,50	**xxxx** [1)]
32,00	6	25	8	4	504,60	**32000**	504,60	**32000**	652,50	**32000**[1)]	652,50	**32000**
32,01 - 34,99	6	25	8	4	652,50	**xxxx** [1)]	652,50	**xxxx** [1)]	652,50	**xxxx** [1)]	652,50	**xxxx** [1)]
35,00	6	25	8	5	528,50	**35000**	528,50	**35000**	713,80	**35000**[1)]	713,80	**35000**
35,01 - 39,99	6	25	8	5	713,80	**xxxx** [1)]	713,80	**xxxx** [1)]	713,80	**xxxx** [1)]	713,80	**xxxx** [1)]
40,00	6	25	8	5	559,00	**40000**	559,00	**40000**	713,80	**40000**[1)]	713,80	**40000**
40,01 - 41,99	6	25	8	5	713,80	**xxxx** [1)]	713,80	**xxxx** [1)]	713,80	**xxxx** [1)]	713,80	**xxxx** [1)]
42,00	6	30	8	6	559,00	**42000**	559,00	**42000**	775,30	**42000**[1)]	775,30	**42000**
42,01 - 49,99	6	30	8	6	775,30	**xxxx** [1)]	775,30	**xxxx** [1)]	775,30	**xxxx** [1)]	775,30	**xxxx** [1)]
50,00	6	30	8	6	572,20	**50000**	572,20	**50000**	775,30	**50000**[1)]	775,30	**50000**
50,01 - 51,99	6	30	8	6	775,30	**xxxx** [1)]	775,30	**xxxx** [1)]	775,30	**xxxx** [1)]	775,30	**xxxx** [1)]
52,00 - 53,99	8	35	10	7	859,80	**xxxx** [1)]	859,80	**xxxx** [1)]	859,80	**xxxx** [1)]	859,80	**xxxx** [1)]
54,00	8	35	10	7	644,00	**54000**[1)]	644,00	**54000**[1)]	859,80	**54000**[1)]	859,80	**54000**[1)]
54,01 - 65,00	8	35	10	7	859,80	**xxxx** [1)]	859,80	**xxxx** [1)]	859,80	**xxxx** [1)]	859,80	**xxxx** [1)]

P					●		●				●	
M							●					
K					●						●	
N					○				●			
S												
H												
O									○			

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 70–72

For xxxx please indicate requested Ø in H7 in the order (e.g Ø 24.12 H7 → article no. 40 539 2412)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7)!
All heads are also available as fixed head variants (not adjustable) on request.

→ **Page 96+97**
Here you will find a detailed operating instruction.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

REAMAX TS – Holder

▲ KLG = Coupling Size

Scope of supply:
Complete holder incl. pull stud but without exchangeable head

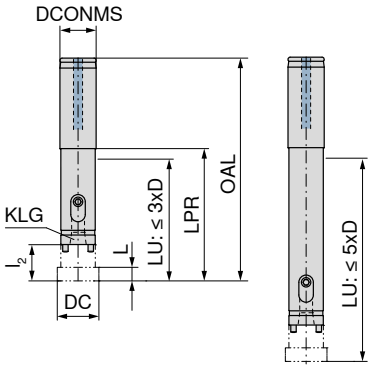

DC mm	KOMET no.	KLG	OAL mm	l_2 mm	LPR mm	L mm	DCONMS mm	torque moment Nm	40 501 ... EUR U3/4E		40 503 ... EUR U3/4E	
18,00 - 19,99	75A.40.13010	1	130	20	80	6	20	1,5	438,10	**02099**		
18,00 - 19,99	75A.40.15010	1	190	20	140	6	20	1,5			454,40	**02099**
20,00 - 21,99	75A.40.13020	2	130	20	80	6	20	2,5	454,40	**02299**		
20,00 - 21,99	75A.40.15020	2	190	20	140	6	20	2,5			474,00	**02299**
22,00 - 26,99	75A.40.13030	3	130	20	80	6	20	4	465,70	**02799**		
22,00 - 26,99	75A.40.15030	3	210	20	160	6	20	4			500,00	**02799**
27,00 - 34,99	75A.40.13040	4	176	25	120	6	25	5	483,70	**03599**		
27,00 - 34,99	75A.40.15040	4	236	25	180	6	25	5			514,50	**03599**
35,00 - 41,99	75A.40.13050	5	176	25	120	6	25	6	552,00	**04299**		
35,00 - 41,99	75A.40.15050	5	256	25	200	6	25	6			582,50	**04299**
42,00 - 51,99	75A.40.13060	6	180	30	120	6	32	10	569,90	**05299**		
42,00 - 51,99	75A.40.15060	6	280	30	220	6	32	10			601,30	**05299**
52,00 - 65,00	75A.40.13070	7	180	30	120	8	32	13	587,90	**06599**		
52,00 - 65,00	75A.40.15070	7	280	30	220	8	32	13			620,30	**06599**

Do not heat shrink tools !

Clamping key – T

Key D

Reamax TS pull stud

Spare parts DC		80 397 ... EUR Y7		80 950 ... EUR Y7		40 900 ... EUR U3/4E	
18,00 - 19,99				T08 - IP	8,11	**039**	11,75	**00100**
20,00 - 21,99	SW2,5	5,12	**025**				11,75	**00200**
22,00 - 26,99	SW3	4,97	**030**				11,75	**00300**
27,00 - 34,99	SW3	4,97	**030**				11,75	**00400**
35,00 - 41,99	SW3	4,97	**030**				16,30	**00500**
42,00 - 51,99	SW4	5,04	**040**				16,30	**00500**
52,00 - 65,00	SW5	5,46	**050**				16,30	**00700**

→ **Page 96+97**
Here you will find a detailed operating instruction.

REAMAX TS – Holder

▲ KLG = Coupling size
▲ Adjustment inside the machine
▲ Alignable DAH Zero holder for correction of concentricity error
▲ DAH Zero holder is pre-loaded and set to a runout of < 0.005 mm

Scope of supply:
Complete holder incl. pull stud but without exchangeable head

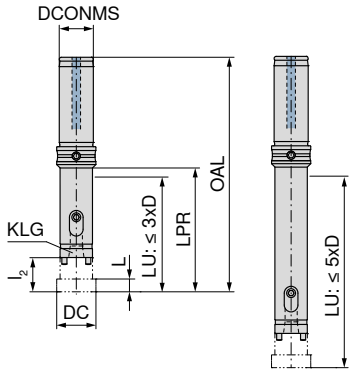

DC mm	KOMET no.	KLG	OAL mm	l_2 mm	LPR mm	L mm	DCONMS mm	torque moment Nm	40 504 ... EUR U3/4E		40 506 ... EUR U3/4E	
18,00 - 19,99	75A.41.13010	1	145	20	80	6	20	1,5	587,90	**02099**		
18,00 - 19,99	75A.41.15010	1	205	20	140	6	20	1,5			625,30	**02099**
20,00 - 21,99	75A.41.13020	2	145	20	80	6	20	2,5	594,40	**02299**		
20,00 - 21,99	75A.41.15020	2	205	20	140	6	20	2,5			644,70	**02299**
22,00 - 26,99	75A.41.13030	3	145	20	80	6	20	4	609,00	**02799**		
22,00 - 26,99	75A.41.15030	3	225	20	160	6	20	4			662,80	**02799**
27,00 - 34,99	75A.41.13040	4	176	25	120	6	25	5	640,00	**03599**		
27,00 - 34,99	75A.41.15040	4	236	25	180	6	25	5			662,80	**03599**
35,00 - 41,99	75A.41.13050	5	176	25	120	6	25	6	778,20	**04299**		
35,00 - 41,99	75A.41.15050	5	256	25	200	6	25	6			793,10	**04299**

Do not heat shrink tools !

Clamping key – T

Key D

Reamax TS pull stud

Spare parts DC	80 397 ... EUR Y7		80 950 ... EUR Y7		40 900 ... EUR U3/4E	
18,00 - 19,99			T08 - IP	**039**	11,75	**00100**
20,00 - 21,99	SW2,5	5,12 **025**			11,75	**00200**
22,00 - 26,99	SW3	4,97 **030**			11,75	**00300**
27,00 - 34,99	SW3	4,97 **030**			11,75	**00400**
35,00 - 41,99	SW3	4,97 **030**			16,30	**00500**

→ **Page 96+97**
Here you will find a detailed operating instruction.

REAMAX – Selection guide

			Ø 12,5 – 40 mm					
Article no.			40 536 …	40 525 …	40 560 …	40 551 …	40 570 …	40 505 …
KOMET no.			640.93	640.93	640.65	640.65	640.27	640.71
Cutting edge geometry			ASG4000	ASG3000	ASG3000	ASG0106	ASG0706	ASG3000
Lead angle			25°	45°	45°	45°	45°/8°	45°
Grade / coating			DST	DST	DBG-P	DBG-P	DBC	TiN
Preferred type available			✓	✓	✓	✓		✓
Application			Through hole	Through hole + blind hole				
Material sub-group		Index						
P	Non alloyed steel	P.1.1	●	●	●			○
		P.1.2	●	●	●			○
		P.1.3	●	●	●			○
		P.1.4	●	●	●			○
		P.1.5	●	●	●			○
	Low alloyed steel	P.2.1	●	●	●			○
		P.2.2	●	●	●			○
		P.2.3	●	●	●			○
		P.2.4			●	●		○
	High-alloy steel and high-alloy tool steel	P.3.1				●		
		P.3.2				●		
		P.3.3				●		
	Stainless steel	P.4.1				●		
		P.4.2				●		
M	Stainless steel	M.1.1				●		
		M.2.1				●		
		M.3.1				●		
K	Grey cast iron	K.1.1			●			○
		K.1.2			●			○
	Spherulitic graphite cast iron	K.2.1	○	●	●			
		K.2.2	○	●	●			
	Malleable iron	K.3.1		●	●			
		K.3.2	○	●	●			
N	Aluminum alloys	N.1.1					●	
		N.1.2					●	
	Cast aluminium alloys	N.2.1					●	
		N.2.2					●	
		N.2.3						
	Copper and copper alloys (Bronze, Brass)	N.3.1		○				●
		N.3.2		○				●
		N.3.3						●
	Magnesium alloys	N.4.1						
H	Hardened steel	H.1.1				●		
		H.1.2				●		
		H.1.3				●		
		H.1.4						
	Chilled iron	H.2.1				●		
	Hardened cast iron	H.3.1				●		
O	Non-metal materials	O.1.1						
		O.1.2						
		O.2.1						
		O.2.2						
		O.3.1					○	

● = Main application
○ = Additional range of application

REAMAX – Replaceable reaming heads

- ▲ Up to tolerance class IT 7 with absolute process security, from the first hole
- ▲ Maximum changeover precision guaranteed
- ▲ Maximum radial run-out accuracy thanks to precision-ground face and taper contact
- ▲ No Ø adjustment necessary
- ▲ Optimised for use with minimum quantity lubrication (MQL)
- ▲ Retraction from the hole at 3-4x feed rate
- ▲ KLG = Coupling size



	DST	DBG-P	DBC	DST	DBG-P	TiN
	640.93 PLGANG 25° ASG4000 CERMET Through hole	640.65 PLGANG 45° ASG0106 HM Through hole + blind hole	640.27 PLGANG 45/8° ASG0706 HM Through hole + blind hole	640.93 PLGANG 45° ASG3000 CERMET Through hole + blind hole	640.65 PLGANG 45° ASG3000 HM Through hole + blind hole	640.71 PLGANG 45° ASG3000 HM Through hole + blind hole
	40 536 ...	40 551 ...	40 570 ...	40 525 ...	40 560 ...	40 505 ...

DC H7 mm	L mm	ZEFP	KLG	EUR U3/4E		EUR U3/4E		EUR U3/4E		EUR U3/4E		EUR U3/4E		EUR U3/4E	
12,50 - 14,99	9	6	1	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)
15,00	9	6	1	282,80	15000 1)	282,80	15000	282,80	15000 1)	282,80	15000 1)	282,80	15000	282,80	150
15,01 - 15,99	9	6	1	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)	341,90	xxxx 1)
16,00	9	6	2	325,30	160	325,30	16000	325,30	16000 1)	325,30	160	325,30	16000	325,30	160
16,01 - 17,99	9	6	2	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)
18,00	9	6	2	329,30	180	329,30	18000	329,30	18000 1)	329,30	180	329,30	18000	329,30	180
18,01 - 19,99	9	6	2	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)
20,00	9	6	2	336,00	200	336,00	20000	336,00	20000 1)	336,00	200	336,00	20000	336,00	200
20,01 - 21,99	9	6	2	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)	390,20	xxxx 1)
22,00	9	8	3	344,00	220	344,00	22000	344,00	22000 1)	344,00	220	344,00	22000	344,00	220
22,01 - 23,99	9	8	3	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)
24,00	9	8	3	355,80	24000 1)	355,80	24000	355,80	24000 1)	355,80	24000 1)	355,80	24000	355,80	240
24,01 - 24,99	9	8	3	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)
25,00	9	8	3	370,50	250	370,50	25000	370,50	25000 1)	370,50	250	370,50	25000	370,50	250
25,01 - 25,99	9	8	3	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)	421,60	xxxx 1)
26,00 - 27,99	9	8	4	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)
28,00	9	8	4	383,80	280	383,80	28000	383,80	28000 1)	383,80	280	383,80	28000	383,80	280
28,01 - 29,99	9	8	4	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)
30,00	9	8	4	402,40	300	402,40	30000	402,40	30000 1)	402,40	300	402,40	30000	402,40	300
30,01 - 32,00	9	8	4	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)	483,10	xxxx 1)
32,01 - 39,99	9	8	5	547,80	xxxx 1)	547,80	xxxx 1)	547,80	xxxx 1)	547,80	xxxx 1)	547,80	xxxx 1)	547,80	xxxx 1)
40,00	9	8	5	426,20	400	426,20	40000	426,20	40000 1)	426,20	400	426,20	40000	426,20	400

P	●	●		●	●	○
M		●				
K	○			●	●	○
N			●	○		●
S						
H		●				
O			○			

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 73–75

For xxxx please indicate requested Ø in H7 in the order (e.g. Ø 15.12 H7 → article no. 40 525 1512)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7)!

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

REAMAX – Holder

▲ KLG = Coupling Size

Scope of supply:
Complete holder, but without exchangeable head

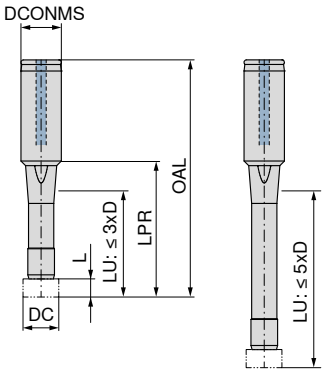

DC mm	KOMET no.	KLG	OAL mm	LPR mm	L mm	DCONMS mm	torque moment Nm	40 590 ... EUR U3/4E		40 591 ... EUR U3/4E	
12,50 - 15,99	640.01.001	1	107	59	9	16	4 - 5	433,10	**016** [1]		
12,50 - 15,99	640.81.001	1	137	89	9	16	4 - 5			433,10	**016** [1]
16,00 - 21,99	640.01.002	2	119	69	9	20	6 - 7	452,60	**022**		
16,00 - 21,99	640.81.002	2	169	119	9	20	6 - 7			452,60	**022**
22,00 - 25,99	640.01.003	3	140	84	9	25	10 - 12	481,90	**026**		
22,00 - 25,99	640.81.003	3	196	140	9	25	10 - 12			481,90	**026**
26,00 - 32,00	640.01.005	4	160	104	9	25	18 - 20	498,20	**032**		
26,00 - 32,00	640.81.005	4	226	170	9	25	18 - 20			498,20	**032**
32,01 - 40,00	640.01.006	5	199	139	9	32	26 - 28	569,90	**040**		
32,01 - 40,00	640.81.006	5	270	210	9	32	26 - 28			569,90	**040**

1) This holder can also be used for reaming heads for through holes from Ø 12 mm, which are available on request

Do not heat shrink tools !

Draw bolt 5xD

Draw bolt 3xD

Draw bar

Circlip

Spare parts DC	40 950 ... EUR U3/4E		40 950 ... EUR U3/4E		40 950 ... EUR U3/4E		40 950 ... EUR U3/4E	
12,50 - 15,99			59,00	**101**	149,80	**001**	1,30	**301**
12,50 - 15,99	60,37	**107**			149,80	**001**	1,30	**301**
16,00 - 21,99			59,00	**102**	149,80	**002**	1,30	**302**
16,00 - 21,99	60,37	**108**			149,80	**002**	1,30	**302**
22,00 - 25,99			69,03	**103**	156,30	**003**	1,30	**303**
22,00 - 25,99	71,10	**109**			156,30	**003**	1,30	**303**
26,00 - 32,00			79,45	**104**	164,50	**004**	1,30	**303**
26,00 - 32,00	81,83	**110**			164,50	**004**	1,30	**303**
32,01 - 40,00			89,87	**106**	177,60	**005**	1,30	**304**
32,01 - 40,00	92,57	**112**			177,60	**005**	1,30	**304**



A detailed operating manual is available for download in the online shop next to the product.

MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads

→ Chapter 2, Solid carbide drilling

Page No. 2|107

Solid Carbide NC Spot Drills

Ø 8, 10, 12, 16, 20 mm
NOF 2

SIG 90° | SIG 120° | SIG 142°

→ Chapter 4, Reaming and countersinking

Page No. 4|18 + 4|19

Replaceable reaming heads

Ø 8,00 – 30,20 mm

Through hole

Ø 12,20 – 30,20 mm

Blind hole

→ Chapter 14, Solid carbide milling cutters

Page No. 14|198 – 14|202

Solid carbide shoulder mills
Ø 8, 10, 12, 16, 20 mm /
ZEFP 3+4

Type PCR-UNI | Type PCR-ALU | Type N

Solid carbide torus bull nose milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4

Type W | Type N

Solid carbide rough and finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6

Type NF

Solid carbide finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6



Type N

Solid carbide ball-nosed end mills
Ø 10, 12, 16, 20 mm / ZEFP 4

Type N

Solid carbide high-feed cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide quarter round cutter
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide deburring cutters
Ø 10, 12, 16, 20 mm / ZEFP 4+6



Type N | Type N

NOF / ZEFP = Number of cutting edges

Tool holder

→ Catalogue – Clamping technology, Chapter 16 Accessories

Page No. 16|259 – 16|261

OAL 60 – 90 mm



Tapered 87° / Steel | Cylindrical* / Steel

OAL 85 – 120 mm



Tapered 87° / Steel | Cylindrical* / Steel



Tapered 87° / Solid carbide | Cylindrical* / Solid carbide

OAL 110 – 150 mm

Tapered 87° / Solid carbide

Cylindrical* / Solid carbide

OAL 150 – 200 mm

Tapered 87° / Solid carbide

Cylindrical* / Steel

Cylindrical* / Solid carbide

OAL 200 – 250 mm

Cylindrical* / Steel

Cylindrical* / Solid carbide

* only conditionally suitable for milling

4

MultiChange – Reaming Head, for Thro' Holes

- ▲ Up to tolerance class IT 7 with absolute process security, from the first hole
- ▲ High-speed reaming heads
- ▲ Irregular pitch for highest radial run-out accuracy
- ▲ A high level of changeover precision guaranteed
- ▲ SZID = Coupling size



	CWC10	TiAlN	K10
	Left Hand Helix PLGANG 30° CERMET Through hole	Left Hand Helix PLGANG 30° HM Through hole	straight flute PLGANG 45° Solid carbide Through hole
	40 210 ...	**40 220 ...**	**40 240 ...**

DC H7 mm	SZID	L mm	LPR mm	ZEFP	DRVS mm	TQX Nm	EUR U3		EUR U3		EUR U3	
8,00	06	8	18	4	6	5,0	220,40	**080**	220,40	**080**	198,90	**080** 1)
8,01 - 9,70	06	8	18	4	6	5,0	240,20	**xxxx** 1)	240,20	**xxxx** 2)	217,30	**xxxx** 1)
9,71 - 9,99	06	8	18	6	8	5,0	271,40	**xxxx** 1)	271,40	**xxxx** 2)	244,50	**xxxx** 1)
10,00	06	8	18	6	8	5,0	251,60	**100**	251,60	**100**	224,50	**100** 1)
10,01 - 10,70	06	8	18	6	8	5,0	271,40	**xxxx** 1)	271,40	**xxxx** 2)	244,50	**xxxx** 1)
10,71 - 11,99	08	8	20	6	8	12,5	271,40	**xxxx** 1)	271,40	**xxxx** 2)	244,50	**xxxx** 1)
12,00	08	8	20	6	8	12,5	251,60	**120**	251,60	**120**	224,50	**120** 1)
12,01 - 12,70	08	8	20	6	8	12,5	271,40	**xxxx** 1)	271,40	**xxxx** 2)	244,50	**xxxx** 1)
12,71 - 13,99	10	8	22	6	10	15,0	290,00	**xxxx** 1)	290,00	**xxxx** 2)	260,20	**xxxx** 1)
14,00	10	8	22	6	10	15,0	265,70	**140**	265,70	**140**	240,20	**140** 1)
14,01 - 15,99	10	8	22	6	10	15,0	290,00	**xxxx** 1)	290,00	**xxxx** 2)	260,20	**xxxx** 1)
16,00	10	8	22	6	10	15,0	265,70	**160**	265,70	**160**	240,20	**160** 1)
16,01 - 16,20	10	8	22	6	10	15,0	290,00	**xxxx** 1)	290,00	**xxxx** 2)	260,20	**xxxx** 1)
16,21 - 17,20	10	8	22	6	13	15,0	290,00	**xxxx** 1)	290,00	**xxxx** 2)	260,20	**xxxx** 1)
17,21 - 17,99	12	12	26	6	13	20,0	302,70	**xxxx** 1)	302,70	**xxxx** 2)	271,40	**xxxx** 1)
18,00	12	12	26	6	13	20,0	280,00	**180**	280,00	**180**	251,60	**180** 1)
18,01 - 19,20	12	12	26	6	13	20,0	302,70	**xxxx** 1)	302,70	**xxxx** 2)	271,40	**xxxx** 1)
19,21 - 19,99	12	12	26	6	16	20,0	302,70	**xxxx** 1)	302,70	**xxxx** 2)	271,40	**xxxx** 1)
20,00	12	12	26	6	16	20,0	280,00	**200**	280,00	**200**	251,60	**200** 1)
20,01 - 20,20	12	12	26	6	16	20,0	302,70	**xxxx** 1)	302,70	**xxxx** 2)	271,40	**xxxx** 1)
20,21 - 21,20	12	12	26	6	16	20,0	316,90	**xxxx** 1)	316,90	**xxxx** 2)	284,30	**xxxx** 1)
21,21 - 21,99	16	12	26	6	16	25,0	316,90	**xxxx** 1)	316,90	**xxxx** 2)	284,30	**xxxx** 1)
22,00	16	12	26	6	16	25,0	292,70	**220**	292,70	**220**	260,20	**220** 1)
22,01 - 23,99	16	12	26	6	16	25,0	316,90	**xxxx** 1)	316,90	**xxxx** 2)	284,30	**xxxx** 1)
24,00	16	12	26	6	16	25,0	292,70	**240**	292,70	**240**	260,20	**240** 1)
24,01 - 24,20	16	12	26	6	16	25,0	316,90	**xxxx** 1)	316,90	**xxxx** 2)	284,30	**xxxx** 1)
24,21 - 24,99	16	12	26	6	19	25,0	339,50	**xxxx** 1)	339,50	**xxxx** 2)	304,20	**xxxx** 1)
25,00	16	12	26	6	19	25,0	309,70	**250**	309,70	**250**	281,40	**250** 1)
25,01 - 25,99	16	12	26	6	19	25,0	339,50	**xxxx** 1)	339,50	**xxxx** 2)	304,20	**xxxx** 1)
26,00	16	12	26	6	19	25,0	309,70	**260**	309,70	**260**	281,40	**260** 1)
26,01 - 26,20	16	12	26	6	19	25,0	339,50	**xxxx** 1)	339,50	**xxxx** 2)	304,20	**xxxx** 1)
26,21 - 27,99	16	12	26	6	21	25,0	339,50	**xxxx** 1)	339,50	**xxxx** 2)	304,20	**xxxx** 1)
28,00	16	12	26	6	21	25,0	309,70	**280**	309,70	**280**	281,40	**280** 1)
28,01 - 28,20	16	12	26	6	21	25,0	339,50	**xxxx** 1)	339,50	**xxxx** 2)	304,20	**xxxx** 1)
28,21 - 29,20	16	12	26	6	24	25,0	373,80	**xxxx** 1)	373,80	**xxxx** 2)	338,20	**xxxx** 1)
29,21 - 29,99	16	12	26	8	24	25,0	373,80	**xxxx** 1)	373,80	**xxxx** 2)	338,20	**xxxx** 1)
30,00	16	12	26	8	24	25,0	343,90	**300**	343,90	**300**	309,70	**300** 1)
30,01 - 30,20	16	12	26	8	24	25,0	373,80	**xxxx** 1)	373,80	**xxxx** 2)	338,20	**xxxx** 1)

P	●	●	
M		●	
K	●		
N			●
S			
H			
O			

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 12 working days / Minimum order 2 pieces
2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 23 working days / Minimum order 2 pieces

→ v_c Page 76

For xxxx please indicate requested diameter in H7 in the order (e.g. 10.89 H7 → article no. 40 210 1089)!
All other diameters and tolerance classes are also possible on request (e.g. 8.5 $^{+0.025}$ or 11 N7).

Holders and accessories can be found in → **Catalogue – Clamping technology, Chapter 16**.

MultiChange – Reaming Head, for blind holes

- ▲ Up to tolerance class IT 7 with absolute process security, from the first hole
- ▲ High-speed reaming heads
- ▲ Irregular pitch for highest radial run-out accuracy
- ▲ A high level of changeover precision guaranteed
- ▲ SZID = Coupling size



	CWC10	TiAlN	K10
	straight flute PLGANG 60° CERMET Blind hole	straight flute PLGANG 60° HM Blind hole	straight flute PLGANG 60° Solid carbide Blind hole
	40 211 ...	**40 221 ...**	**40 241 ...**

DC H7 mm	SZID	L mm	LPR mm	ZEFP	DRVS mm	TQX Nm	EUR U3		EUR U3		EUR U3	
12,20 - 12,70	06	8	20	6	6	5,0	271,40	**xxxx** [1]	271,40	**xxxx** [2]	244,50	**xxxx** [1]
12,71 - 13,99	06	8	22	6	6	5,0	290,00	**xxxx** [1]	290,00	**xxxx** [2]	260,20	**xxxx** [1]
14,00	06	8	22	6	6	5,0	265,70	**140**	265,70	**140**	240,20	**140** [1]
14,01 - 14,20	06	8	22	6	6	5,0	290,00	**xxxx** [1]	290,00	**xxxx** [2]	260,20	**xxxx** [1]
14,21 - 15,99	08	8	22	6	8	12,5	290,00	**xxxx** [1]	281,40	**xxxx** [2]	260,20	**xxxx** [1]
16,00	08	8	22	6	8	12,5	265,70	**160**	265,70	**160**	240,20	**160** [1]
16,01 - 16,20	08	8	22	6	8	12,5	290,00	**xxxx** [1]	290,00	**xxxx** [2]	260,20	**xxxx** [1]
16,21 - 17,20	10	8	22	6	10	15,0	302,70	**xxxx** [1]	302,70	**xxxx** [2]	271,40	**xxxx** [1]
17,21 - 17,99	10	12	26	6	10	15,0	302,70	**xxxx** [1]	302,70	**xxxx** [2]	271,40	**xxxx** [1]
18,00	10	12	26	6	10	15,0	280,00	**180**	280,00	**180**	251,60	**180** [1]
18,01 - 19,99	10	12	26	6	10	15,0	302,70	**xxxx** [1]	302,70	**xxxx** [2]	271,40	**xxxx** [1]
20,00	10	12	26	6	10	15,0	280,00	**200**	280,00	**200**	251,60	**200** [1]
20,01 - 20,20	10	12	26	6	10	15,0	302,70	**xxxx** [1]	302,70	**xxxx** [2]	271,40	**xxxx** [1]
20,21 - 21,99	12	12	26	6	13	20,0	316,90	**xxxx** [1]	316,90	**xxxx** [2]	284,30	**xxxx** [1]
22,00	12	12	26	6	13	20,0	292,70	**220**	292,70	**220**	260,20	**220** [1]
22,01 - 23,99	12	12	26	6	13	20,0	316,90	**xxxx** [1]	316,90	**xxxx** [2]	284,30	**xxxx** [1]
24,00	12	12	26	6	13	20,0	292,70	**240**	292,70	**240**	260,20	**240** [1]
24,01 - 24,20	12	12	26	6	13	20,0	316,90	**xxxx** [1]	316,90	**xxxx** [2]	284,30	**xxxx** [1]
24,21 - 24,99	16	12	26	6	16	25,0	339,50	**xxxx** [1]	339,50	**xxxx** [2]	304,20	**xxxx** [1]
25,00	16	12	26	6	16	25,0	309,70	**250**	309,70	**250**	281,40	**250** [1]
25,01 - 25,99	16	12	26	6	16	25,0	339,50	**xxxx** [1]	339,50	**xxxx** [2]	304,20	**xxxx** [1]
26,00	16	12	26	6	16	25,0	309,70	**260**	309,70	**260**	281,40	**260** [1]
26,01 - 27,99	16	12	26	6	16	25,0	339,50	**xxxx** [1]	339,50	**xxxx** [2]	304,20	**xxxx** [1]
28,00	16	12	26	6	16	25,0	309,70	**280**	309,70	**280**	281,40	**280** [1]
28,01 - 28,20	16	12	26	6	16	25,0	339,50	**xxxx** [1]	339,50	**xxxx** [2]	304,20	**xxxx** [1]
28,21 - 29,20	16	12	26	6	16	25,0	373,80	**xxxx** [1]	373,80	**xxxx** [2]	338,20	**xxxx** [1]
29,21 - 29,99	16	12	26	8	16	25,0	373,80	**xxxx** [1]	362,50	**xxxx** [2]	338,20	**xxxx** [1]
30,00	16	12	26	8	16	25,0	343,90	**300**	343,90	**300**	309,70	**300** [1]
30,01 - 30,20	16	12	26	8	16	25,0	373,80	**xxxx** [1]	373,80	**xxxx** [2]	338,20	**xxxx** [1]

P	●	●	
M		●	
K	●		
N			●
S			
H			
O			

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 12 working days / Minimum order 2 pieces
2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 23 working days / Minimum order 2 pieces

→ v_c Page 76

For xxxx please indicate requested diameter in H7 in the order (e.g. 12.89 H7 → article no. 40 211 1289)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 15 N7).

Holders and accessories can be found in → **Catalogue – Clamping technology, Chapter 16**.

Monomax – Selection guide

			Ø 5,60 – 25,89 mm								
Article no. (3xD)			40 635 …	40 625 …	40 656 …	40 652 …	40 648 …	40 605 …	40 657 …	40 644 …	40 640 …
Article no. (5xD)			40 636 …	40 626 …	40 666 …	40 653 …	40 649 …	40 606 …	40 665 …	40 645 …	40 641 …
KOMET no. (3xD)			56J.93	56J.93	56J.65	56J.65	56J.17	56J.71	56H.65	56H.65	56H.17
KOMET no. (5xD)			56R.93	56R.93	56R.65	56R.65	56R.17	56R.71	56Q.65	56Q.65	56Q.17
Cutting edge geometry			ASG4000	ASG3000	ASG3000	ASG0106	ASG0706	ASG3000	ASG3000	ASG0106	ASG0706
Lead angle			25°	45°	45°	45°	45°/8°	45°	45°	45°	45°/8°
Grade / coating			DST	DST	DBG-P	DBG-P	DBC	TIN	DBG-P	DBG-P	DBC
Preferred type available			✓	✓	✓	✓		✓			
Application			Through hole						Blind hole		
Material sub-group		Index									
P	Non alloyed steel	P.1.1	●	●	●			○	●		
		P.1.2	●	●	●			○	●		
		P.1.3	●	●	●			○	●		
		P.1.4	●	●	●			○	●		
		P.1.5	●	●	●			○	●		
	Low alloyed steel	P.2.1	●	●	●			○	●		
		P.2.2	●	●	●			○	●		
		P.2.3	●	●	●			○	●		
		P.2.4			●	●		○	●		
	High-alloy steel and high-alloy tool steel	P.3.1				●				●	
		P.3.2				●				●	
		P.3.3				●				●	
	Stainless steel	P.4.1				●				●	
		P.4.2				●				●	
M	Stainless steel	M.1.1				●				●	
		M.2.1				●				●	
		M.3.1				●				●	
K	Grey cast iron	K.1.1			●			○	●		
		K.1.2			●			○	●		
	Spherulitic graphite cast iron	K.2.1	○	●	●				●		
		K.2.2	○	●	●				●		
	Malleable iron	K.3.1	○	●	●				●		
		K.3.2	○	●	●				●		
N	Aluminum alloys	N.1.1					●				●
		N.1.2					●				●
	Cast aluminium alloys	N.2.1					●				●
		N.2.2					●				●
		N.2.3					●				●
	Copper and copper alloys (Bronze, Brass)	N.3.1		○				●			
		N.3.2		○				●			
		N.3.3						●			
	Magnesium alloys	N.4.1									
O	Non-metal materials	O.1.1									
		O.1.2									
		O.2.1									
		O.2.2									
		O.3.1					○				○

● = Main application
○ = Additional range of application

Monomax – High-speed reamers, short

- ▲ adjustable for smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

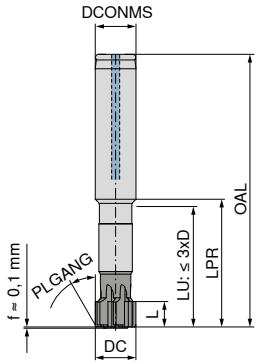

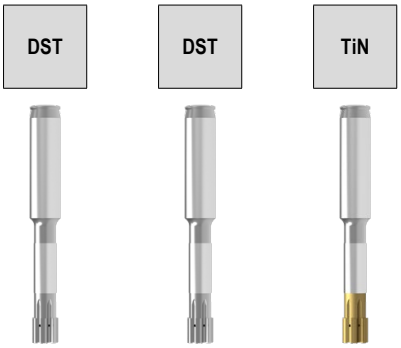

56J.93	56J.93	56J.71
≤ 3xD	≤ 3xD	≤ 3xD
PLGANG 45°	PLGANG 25°	PLGANG 45°
ASG3000	ASG4000	ASG3000
CERMET	CERMET	HM
Through hole	Through hole	Through hole

DC H7 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 625 ... EUR U3/4E		40 635 ... EUR U3/4E		40 605 ... EUR U3/4E	
5,60 - 5,99	9,5	35	40	85	12	4	471,40	xxxx 1)	471,40	xxxx 1)	471,40	xxxx 1)
6,00	9,5	35	40	85	12	4	387,80	060	387,80	060	387,80	060
6,01 - 7,99	9,5	35	40	85	12	4	471,40	xxxx 1)	471,40	xxxx 1)	471,40	xxxx 1)
8,00	9,5	35	40	85	12	4	402,40	080	402,40	080	402,40	080
8,01 - 8,89	9,5	35	40	85	12	4	471,40	xxxx 1)	471,40	xxxx 1)	471,40	xxxx 1)
8,90 - 9,89	9,5	45	50	95	12	6	542,90	xxxx 1)	542,90	xxxx 1)	542,90	xxxx 1)
9,90 - 9,99	9,5	45	50	95	12	6	542,90	xxxx 1)	542,90	xxxx 1)	542,90	xxxx 1)
10,00	9,5	45	50	95	12	6	435,60	100	435,60	100	435,60	100
10,01 - 11,99	9,5	45	50	95	12	6	542,90	xxxx 1)	542,90	xxxx 1)	542,90	xxxx 1)
12,00	9,5	45	50	95	12	6	448,80	120	448,80	120	448,80	120
12,01 - 13,99	9,5	45	50	95	12	6	542,90	xxxx 1)	542,90	xxxx 1)	542,90	xxxx 1)
14,00	9,5	45	50	95	12	6	480,70	140	480,70	140	480,70	140
14,01 - 14,99	9,5	45	50	95	12	6	542,90	xxxx 1)	542,90	xxxx 1)	542,90	xxxx 1)
15,00	9,5	45	50	95	12	6	492,60	150	492,60	150	492,60	150
15,01 - 15,89	9,5	45	50	95	12	6	542,90	xxxx 1)	542,90	xxxx 1)	542,90	xxxx 1)
15,90 - 15,99	9,5	45	50	100	16	6	667,20	xxxx 1)	667,20	xxxx 1)	667,20	xxxx 1)
16,00	9,5	45	50	100	16	6	504,60	160	504,60	160	504,60	160
16,01 - 17,99	9,5	45	50	100	16	6	667,20	xxxx 1)	667,20	xxxx 1)	667,20	xxxx 1)
18,00	9,5	45	50	100	16	6	539,00	180	539,00	180	539,00	180
18,01 - 18,89	9,5	45	50	100	16	6	667,20	xxxx 1)	667,20	xxxx 1)	667,20	xxxx 1)
18,90 - 19,99	9,5	55	60	120	20	6	809,90	xxxx 1)	809,90	xxxx 1)	809,90	xxxx 1)
20,00	9,5	55	60	120	20	6	581,60	200	581,60	200	581,60	200
20,01 - 25,89	9,5	55	60	120	20	6	809,90	xxxx 1)	809,90	xxxx 1)	809,90	xxxx 1)
P							●		●		○	
M												
K							●		○		○	
N							○				●	
S												
H												
O												

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 635 1589)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Monomax – High-speed reamers, short

▲ adjustable for smallest bore tolerances
▲ wear compensation within the tolerance zone
▲ retraction from the hole at 3–4 times the cutting feed rate
▲ up to tolerance class IT 5 with absolute process security, from the first hole

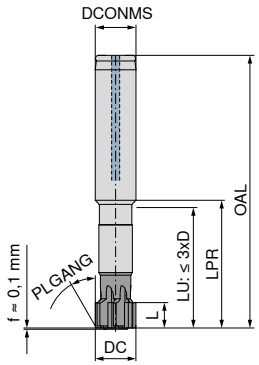

NEW

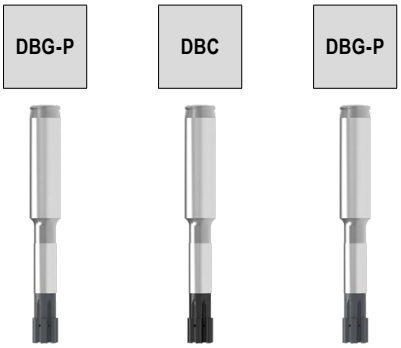

	DBG-P	DBC	DBG-P
	56J.65	56J.17	56J.65
	≤ 3xD	≤ 3xD	≤ 3xD
	PLGANG 45°	PLGANG 45/8°	PLGANG 45°
	ASG0106	ASG0706	ASG3000
	HM	HM	HM
	Through hole	Through hole	Through hole
	40 652 ...	**40 648 ...**	**40 656 ...**

DC $_{H7}$ mm	L mm	LU mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR U3/4E		EUR U3/4E		EUR U3/4E	
5,60 - 5,99	9,5	35	40	85	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
6,00	9,5	35	40	85	12	4	387,80	**06000**	471,40	**06000** [1]	387,80	**06000**
6,01 - 7,99	9,5	35	40	85	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,00	9,5	35	40	85	12	4	402,40	**08000**	471,40	**08000** [1]	402,40	**08000**
8,01 - 8,89	9,5	35	40	85	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,90 - 9,89	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
9,90 - 9,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
10,00	9,5	45	50	95	12	6	435,60	**10000**	542,90	**10000** [1]	435,60	**10000**
10,01 - 11,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
12,00	9,5	45	50	95	12	6	448,80	**12000**	542,90	**12000** [1]	448,80	**12000**
12,01 - 13,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
14,00	9,5	45	50	95	12	6	480,70	**14000**	542,90	**14000** [1]	480,70	**14000**
14,01 - 14,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
15,00	9,5	45	50	95	12	6	492,60	**15000**	542,90	**15000** [1]	492,60	**15000**
15,01 - 15,89	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
15,90 - 15,99	9,5	45	50	100	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
16,00	9,5	45	50	100	16	6	504,60	**16000**	667,20	**16000** [1]	504,60	**16000**
16,01 - 17,99	9,5	45	50	100	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,00	9,5	45	50	100	16	6	539,00	**18000**	667,20	**18000** [1]	539,00	**18000**
18,01 - 18,89	9,5	45	50	100	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,90 - 19,99	9,5	55	60	120	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
20,00	9,5	55	60	120	20	6	581,60	**20000**	809,90	**20000** [1]	581,60	**20000**
20,01 - 25,89	9,5	55	60	120	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]

P	●		●
M	●		
K			●
N		●	
S			
H			
O		○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 652 1589)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Monomax – High-speed reamers, short

- ▲ adjustable for smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

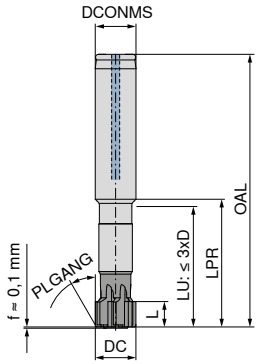

DBG-P	DBC	DBG-P
56H.65	56H.17	56H.65
≤ 3xD	≤ 3xD	≤ 3xD
PLGANG 45°	PLGANG 45/8°	PLGANG 45°
ASG0106	ASG0706	ASG3000
HM	HM	HM
Blind hole	Blind hole	Blind hole

DC H7 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 644 ... EUR U3/4E		40 640 ... EUR U3/4E		40 657 ... EUR U3/4E	
5,60 - 5,99	9,5	35	40	85	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
6,00	9,5	35	40	85	12	4	471,40	**06000** [1]	471,40	**06000** [1]	471,40	**06000** [1]
6,01 - 7,99	9,5	35	40	85	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,00	9,5	35	40	85	12	4	471,40	**08000** [1]	471,40	**08000** [1]	471,40	**08000** [1]
8,01 - 8,89	9,5	35	40	85	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,90 - 9,89	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
9,90 - 9,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
10,00	9,5	45	50	95	12	6	542,90	**10000** [1]	542,90	**10000** [1]	542,90	**10000** [1]
10,01 - 11,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
12,00	9,5	45	50	95	12	6	542,90	**12000** [1]	542,90	**12000** [1]	542,90	**12000** [1]
12,01 - 13,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
14,00	9,5	45	50	95	12	6	542,90	**14000** [1]	542,90	**14000** [1]	542,90	**14000** [1]
14,01 - 14,99	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
15,00	9,5	45	50	95	12	6	542,90	**15000** [1]	542,90	**15000** [1]	542,90	**15000** [1]
15,01 - 15,89	9,5	45	50	95	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
15,90 - 15,99	9,5	45	50	100	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
16,00	9,5	45	50	100	16	6	667,20	**16000** [1]	667,20	**16000** [1]	667,20	**16000** [1]
16,01 - 17,99	9,5	45	50	100	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,00	9,5	45	50	100	16	6	667,20	**18000** [1]	667,20	**18000** [1]	667,20	**18000** [1]
18,01 - 18,89	9,5	45	50	100	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,90 - 19,99	9,5	55	60	120	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
20,00	9,5	55	60	120	20	6	809,90	**20000** [1]	809,90	**20000** [1]	809,90	**20000** [1]
20,01 - 25,89	9,5	55	60	120	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
P							●				●	
M							●					
K											●	
N									●			
S												
H												
O									○			

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 644 1589)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Monomax – High-speed reamers, long

- ▲ adjustable for the smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

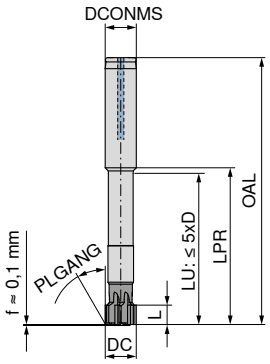

	DST	DST	TiN
	56R.93	56R.93	56R.71
	≤ 5xD	≤ 5xD	≤ 5xD
	PLGANG 45°	PLGANG 25°	PLGANG 45°
	ASG3000	ASG4000	ASG3000
	CERMET	CERMET	HM
	Through hole	Through hole	Through hole
	40 626 ...	**40 636 ...**	**40 606 ...**

DC $_{H7}$ mm	L mm	LU mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR U3/4E		EUR U3/4E		EUR U3/4E	
5,60 - 5,99	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
6,00	9,5	80	85	130	12	4	387,80	**060**	387,80	**060**	387,80	**060**
6,01 - 7,99	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,00	9,5	80	85	130	12	4	402,40	**080**	402,40	**080**	402,40	**080**
8,01 - 8,89	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,90 - 9,89	9,5	80	85	130	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
9,90 - 9,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
10,00	9,5	110	115	160	12	6	435,60	**100**	435,60	**100**	435,60	**100**
10,01 - 11,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
12,00	9,5	110	115	160	12	6	448,80	**120**	448,80	**120**	448,80	**120**
12,01 - 13,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
14,00	9,5	110	115	160	12	6	480,70	**140**	480,70	**140**	480,70	**140**
14,01 - 14,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
15,00	9,5	110	115	160	12	6	492,60	**150**	492,60	**150**	492,60	**150**
15,01 - 15,89	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
15,90 - 15,99	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
16,00	9,5	125	130	180	16	6	504,60	**160**	504,60	**160**	504,60	**160**
16,01 - 17,99	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,00	9,5	125	130	180	16	6	539,00	**180**	539,00	**180**	539,00	**180**
18,01 - 18,89	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,90 - 19,99	9,5	135	140	200	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
20,00	9,5	135	140	200	20	6	581,60	**200**	581,60	**200**	581,60	**200**
20,01 - 25,89	9,5	135	140	200	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
P							●		●		○	
M												
K							●		○		○	
N							○				●	
S												
H												
O												

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 636 1589)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Monomax – High-speed reamers, long

- ▲ adjustable for the smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

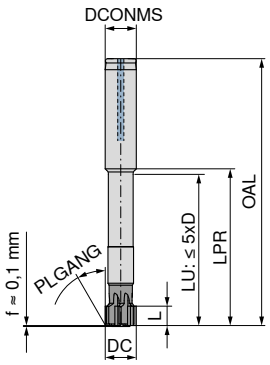

NEW

	DBG-P	DBC	DBG-P
	56R.65	56R.17	56R.65
	≤ 5xD	≤ 5xD	≤ 5xD
	PLGANG 45°	PLGANG 45/8°	PLGANG 45°
	ASG0106	ASG0706	ASG3000
	HM	HM	HM
	Through hole	Through hole	Through hole
	40 653 ...	**40 649 ...**	**40 666 ...**

DC H7 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U3/4E		EUR U3/4E		EUR U3/4E	
5,60 - 5,99	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
6,00	9,5	80	85	130	12	4	387,80	**06000**	471,40	**06000**[1]	387,80	**06000**
6,01 - 7,99	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,00	9,5	80	85	130	12	4	402,40	**08000**	471,40	**08000**[1]	402,40	**08000**
8,01 - 8,89	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,90 - 9,89	9,5	80	85	130	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
9,90 - 9,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
10,00	9,5	110	115	160	12	6	435,60	**10000**	602,60	**10000**[1]	435,60	**10000**
10,01 - 11,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
12,00	9,5	110	115	160	12	6	448,80	**12000**	602,60	**12000**[1]	448,80	**12000**
12,01 - 13,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
14,00	9,5	110	115	160	12	6	480,70	**14000**	602,60	**14000**[1]	480,70	**14000**
14,01 - 14,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
15,00	9,5	110	115	160	12	6	492,60	**15000**	602,60	**15000**[1]	492,60	**15000**
15,01 - 15,89	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
15,90 - 15,99	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
16,00	9,5	125	130	180	16	6	504,60	**16000**	667,20	**16000**[1]	504,60	**16000**
16,01 - 17,99	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,00	9,5	125	130	180	16	6	539,00	**18000**	667,20	**18000**[1]	539,00	**18000**
18,01 - 18,89	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,90 - 19,99	9,5	135	140	200	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
20,00	9,5	135	140	200	20	6	581,60	**20000**	809,90	**20000**[1]	581,60	**20000**
20,01 - 25,89	9,5	135	140	200	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]

P	●		●
M	●		
K			●
N		●	
S			
H			
O		○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 653 1589)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Monomax – High-speed reamers, long

- ▲ adjustable for the smallest bore tolerances
- ▲ wear compensation within the tolerance zone
- ▲ retraction from the hole at 3–4 times the cutting feed rate
- ▲ up to tolerance class IT 5 with absolute process security, from the first hole

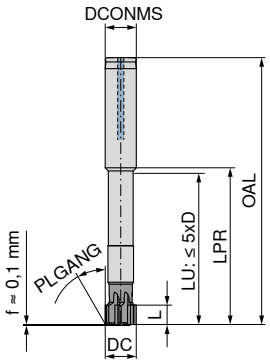

	DBG-P	DBC	DBG-P
	56Q.65	56Q.17	56Q.65
	≤ 5xD	≤ 5xD	≤ 5xD
	PLGANG 45°	PLGANG 45/8°	PLGANG 45°
	ASG0106	ASG0706	ASG3000
	HM	HM	HM
	Blind hole	Blind hole	Blind hole
	40 645 ...	**40 641 ...**	**40 665 ...**
	EUR U3/4E	EUR U3/4E	EUR U3/4E

DC H7 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP						
5,60 - 5,99	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
6,00	9,5	80	85	130	12	4	471,40	**06000** [1]	471,40	**06000** [1]	471,40	**06000** [1]
6,01 - 7,99	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,00	9,5	80	85	130	12	4	471,40	**08000** [1]	471,40	**08000** [1]	471,40	**08000** [1]
8,01 - 8,89	9,5	80	85	130	12	4	471,40	**xxxx** [1]	471,40	**xxxx** [1]	471,40	**xxxx** [1]
8,90 - 9,89	9,5	80	85	130	12	6	542,90	**xxxx** [1]	542,90	**xxxx** [1]	542,90	**xxxx** [1]
9,90 - 9,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
10,00	9,5	110	115	160	12	6	602,60	**10000** [1]	602,60	**10000** [1]	602,60	**10000** [1]
10,01 - 11,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
12,00	9,5	110	115	160	12	6	602,60	**12000** [1]	602,60	**12000** [1]	602,60	**12000** [1]
12,01 - 13,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
14,00	9,5	110	115	160	12	6	602,60	**14000** [1]	602,60	**14000** [1]	602,60	**14000** [1]
14,01 - 14,99	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
15,00	9,5	110	115	160	12	6	602,60	**15000** [1]	602,60	**15000** [1]	602,60	**15000** [1]
15,01 - 15,89	9,5	110	115	160	12	6	602,60	**xxxx** [1]	602,60	**xxxx** [1]	602,60	**xxxx** [1]
15,90 - 15,99	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
16,00	9,5	125	130	180	16	6	667,20	**16000** [1]	667,20	**16000** [1]	667,20	**16000** [1]
16,01 - 17,99	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,00	9,5	125	130	180	16	6	667,20	**18000** [1]	667,20	**18000** [1]	667,20	**18000** [1]
18,01 - 18,89	9,5	125	130	180	16	6	667,20	**xxxx** [1]	667,20	**xxxx** [1]	667,20	**xxxx** [1]
18,90 - 19,99	9,5	135	140	200	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
20,00	9,5	135	140	200	20	6	809,90	**20000** [1]	809,90	**20000** [1]	809,90	**20000** [1]
20,01 - 25,89	9,5	135	140	200	20	6	809,90	**xxxx** [1]	809,90	**xxxx** [1]	809,90	**xxxx** [1]
P								●				●
M								●				
K												●
N										●		
S												
H												
O										○		

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 77–80

Do not heat shrink tools !

For xxxx please indicate requested Ø in H7 in the order (e.g. 15.89 H7 → article no. 40 645 1589)!
All other diameters and tolerance classes are also possible on request (e.g. 18.5 $^{+0.025}$ or 18 N7).

Detailed adjustment instructions are available to download in the online shop for the item.

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use

UNI

DBG-U

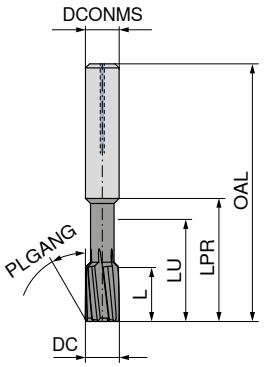

51P.57

Left Hand Helix
PLGANG 30°
ASG2210
Solid carbide
Through hole

40 483 ...

DC $_{H7}$ mm	L mm	LU mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR U4/4R	
4	12	24	28	50	4	4	135,80	**04000**
5	12	31	36	64	6	4	137,90	**05000**
6	12	31	36	64	6	4	140,90	**06000**
7	16	31	36	70	8	6	147,20	**07000**
8	16	31	36	70	8	6	147,20	**08000**
9	16	35	40	80	10	6	207,80	**09000**
10	16	35	40	80	10	6	207,80	**10000**
11	20	40	45	90	12	6	275,80	**11000**
12	20	40	45	90	12	6	275,80	**12000**
16	20	40	45	93	16	8	408,90	**16000**

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c Page 83

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use
- ▲ tolerance: Ø 2,96 – 6,03 mm = +0,004 mm
- ▲ tolerance: Ø 6,04 – 20,05 mm = +0,005 mm

UNI

DBG-U

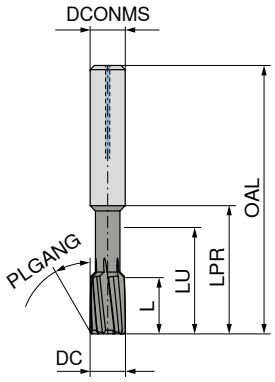

51P.57

Left Hand Helix
PLGANG 30°
ASG2210
Solid carbide
Through hole

40 489 ...

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4/4R	
2,96 - 3,96	12	24	28	50	4	4	169,90	**xxxxx**[1)]
3,97	12	24	28	50	4	4	144,00	**03970**
3,98	12	24	28	50	4	4	144,00	**03980**
3,99	12	24	28	50	4	4	144,00	**03990**
4,00	12	24	28	50	4	4	144,00	**04000**
4,01	12	24	28	50	4	4	144,00	**04010**
4,02	12	24	28	50	4	4	144,00	**04020**
4,03	12	24	28	50	4	4	144,00	**04030**
4,04 - 4,05	12	24	28	50	4	4	169,90	**xxxxx**[1)]
4,06 - 4,96	12	31	36	64	6	4	172,40	**xxxxx**[1)]
4,97	12	31	36	64	6	4	147,20	**04970**
4,98	12	31	36	64	6	4	147,20	**04980**
4,99	12	31	36	64	6	4	147,20	**04990**
5,00	12	31	36	64	6	4	147,20	**05000**
5,01	12	31	36	64	6	4	147,20	**05010**
5,02	12	31	36	64	6	4	147,20	**05020**
5,03	12	31	36	64	6	4	147,20	**05030**
5,04 - 5,96	12	31	36	64	6	4	169,90	**xxxxx**[1)]
5,97	12	31	36	64	6	4	148,20	**05970**
5,98	12	31	36	64	6	4	148,20	**05980**
5,99	12	31	36	64	6	4	148,20	**05990**
6,00	12	31	36	64	6	4	148,20	**06000**
6,01	12	31	36	64	6	4	148,20	**06010**
6,02	12	31	36	64	6	4	148,20	**06020**
6,03	12	31	36	64	6	4	148,20	**06030**
6,04 - 6,05	12	31	36	64	6	4	169,90	**xxxxx**[1)]
6,06 - 7,96	16	31	36	70	8	6	181,40	**xxxxx**[1)]
7,97	16	31	36	70	8	6	155,40	**07970**
7,98	16	31	36	70	8	6	155,40	**07980**
7,99	16	31	36	70	8	6	155,40	**07990**
8,00	16	31	36	70	8	6	155,40	**08000**
8,01	16	31	36	70	8	6	155,40	**08010**
8,02	16	31	36	70	8	6	155,40	**08020**
8,03	16	31	36	70	8	6	155,40	**08030**

P	●
M	●
K	●
N	○
S	○
H	○
O	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 83

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 489 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use
- ▲ tolerance: Ø 2,96 – 6,03 mm = +0,004 mm
- ▲ tolerance: Ø 6,04 – 20,05 mm = +0,005 mm

UNI

DBG-U

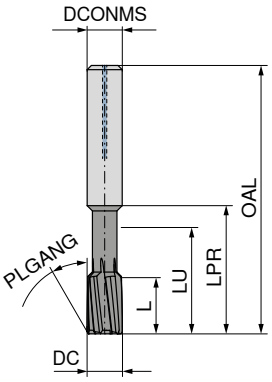

51P.57

Left Hand Helix
PLGANG 30°
ASG2210
Solid carbide
Through hole

4

40 489 ...

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4/4R	
8,04 - 8,05	16	31	36	70	8	6	181,40	**xxxxx**[1]
8,06 - 9,96	16	35	40	80	10	6	225,20	**xxxxx**[1]
9,97	16	35	40	80	10	6	221,30	**09970**
9,98	16	35	40	80	10	6	221,30	**09980**
9,99	16	35	40	80	10	6	221,30	**09990**
10,00	16	35	40	80	10	6	221,30	**10000**
10,01	16	35	40	80	10	6	221,30	**10010**
10,02	16	35	40	80	10	6	221,30	**10020**
10,03	16	35	40	80	10	6	221,30	**10030**
10,04 - 10,05	16	35	40	80	10	6	225,20	**xxxxx**[1]
10,06 - 11,96	20	40	45	90	12	6	339,60	**xxxxx**[1]
11,97	20	40	45	90	12	6	294,30	**11970**
11,98	20	40	45	90	12	6	294,30	**11980**
11,99	20	40	45	90	12	6	294,30	**11990**
12,00	20	40	45	90	12	6	294,30	**12000**
12,01	20	40	45	90	12	6	294,30	**12010**
12,02	20	40	45	90	12	6	294,30	**12020**
12,03	20	40	45	90	12	6	294,30	**12030**
12,04 - 12,05	20	40	45	90	12	6	339,60	**xxxxx**[1]
12,06 - 14,05	20	40	45	90	14	6	396,20	**xxxxx**[1]
14,06 - 15,96	20	40	45	93	16	6	451,60	**xxxxx**[1]
15,97 - 16,05	20	40	45	93	16	8	510,00	**xxxxx**[1]
16,06 - 18,05	20	47	52	100	18	8	543,20	**xxxxx**[1]
18,06 - 20,05	20	45	50	102	20	8	576,70	**xxxxx**[1]

P	●
M	●
K	●
N	○
S	○
H	○
O	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 83

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 489 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, short

▲ extremely irregular pitch
▲ designed for high-speed machining
▲ specialised geometry and coating for universal use

UNI

DBG-U

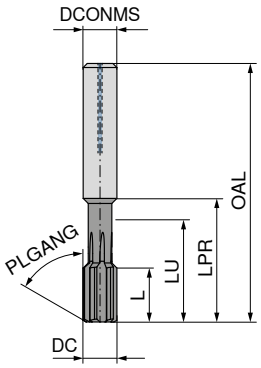

51M.57

straight flute
PLGANG 60°
ASG2110
Solid carbide
Blind hole

40 481 ...

DC H7 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4/4R	
4	12	24	28	50	4	4	113,20	**04000**
5	12	31	36	64	6	4	115,30	**05000**
6	12	31	36	64	6	4	120,40	**06000**
7	16	31	36	70	8	6	126,60	**07000**
8	16	31	36	70	8	6	126,60	**08000**
9	16	35	40	80	10	6	181,10	**09000**
10	16	35	40	80	10	6	181,10	**10000**
11	20	40	45	90	12	6	240,80	**11000**
12	20	40	45	90	12	6	240,80	**12000**
16	20	40	45	93	16	8	366,00	**16000**

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c Page 83

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use
- ▲ tolerance: Ø 2,96 – 6,03 mm = +0,004 mm
- ▲ tolerance: Ø 6,04 – 20,05 mm = +0,005 mm

UNI

DBG-U

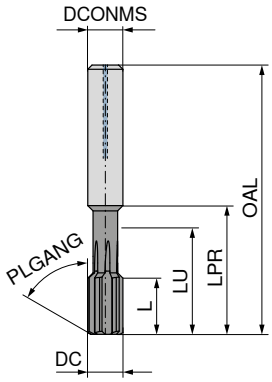

51M.57

straight flute
PLGANG 60°
ASG2110
Solid carbide
Blind hole

4

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 488 ... EUR U4/4R	
2,96 - 3,96	12	24	28	50	4	4	141,40	xxxxx[1]
3,97	12	24	28	50	4	4	121,40	03970
3,98	12	24	28	50	4	4	121,40	03980
3,99	12	24	28	50	4	4	121,40	03990
4,00	12	24	28	50	4	4	121,40	04000
4,01	12	24	28	50	4	4	121,40	04010
4,02	12	24	28	50	4	4	121,40	04020
4,03	12	24	28	50	4	4	121,40	04030
4,04 - 4,05	12	24	28	50	4	4	141,40	xxxxx[1]
4,06 - 4,96	12	31	36	64	6	4	145,40	xxxxx[1]
4,97	12	31	36	64	6	4	124,50	04970
4,98	12	31	36	64	6	4	124,50	04980
4,99	12	31	36	64	6	4	124,50	04990
5,00	12	31	36	64	6	4	124,50	05000
5,01	12	31	36	64	6	4	124,50	05010
5,02	12	31	36	64	6	4	124,50	05020
5,03	12	31	36	64	6	4	124,50	05030
5,04 - 5,96	12	31	36	64	6	4	145,40	xxxxx[1]
5,97	12	31	36	64	6	4	126,60	05970
5,98	12	31	36	64	6	4	126,60	05980
5,99	12	31	36	64	6	4	126,60	05990
6,00	12	31	36	64	6	4	126,60	06000
6,01	12	31	36	64	6	4	126,60	06010
6,02	12	31	36	64	6	4	126,60	06020
6,03	12	31	36	64	6	4	126,60	06030
6,04 - 6,05	12	31	36	64	6	4	145,40	xxxxx[1]
6,06 - 7,96	16	31	36	70	8	6	157,00	xxxxx[1]
7,97	16	31	36	70	8	6	132,80	07970
7,98	16	31	36	70	8	6	132,80	07980
7,99	16	31	36	70	8	6	132,80	07990
8,00	16	31	36	70	8	6	132,80	08000
8,01	16	31	36	70	8	6	132,80	08010
8,02	16	31	36	70	8	6	132,80	08020
8,03	16	31	36	70	8	6	132,80	08030

P	●
M	●
K	●
N	○
S	○
H	○
O	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 83

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 488 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use
- ▲ tolerance: Ø 2,96 – 6,03 mm = +0,004 mm
- ▲ tolerance: Ø 6,04 – 20,05 mm = +0,005 mm

UNI

DBG-U

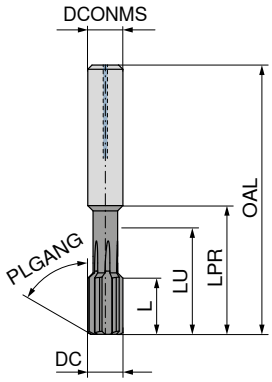

51M.57

straight flute
PLGANG 60°
ASG2110
Solid carbide
Blind hole

40 488 ...

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4/4R	
8,04 - 8,05	16	31	36	70	8	6	157,00	**xxxxx**[1]
8,06 - 9,96	16	35	40	80	10	6	199,40	**xxxxx**[1]
9,97	16	35	40	80	10	6	193,50	**09970**
9,98	16	35	40	80	10	6	193,50	**09980**
9,99	16	35	40	80	10	6	193,50	**09990**
10,00	16	35	40	80	10	6	193,50	**10000**
10,01	16	35	40	80	10	6	193,50	**10010**
10,02	16	35	40	80	10	6	193,50	**10020**
10,03	16	35	40	80	10	6	193,50	**10030**
10,04 - 10,05	16	35	40	80	10	6	199,40	**xxxxx**[1]
10,06 - 11,96	20	40	45	90	12	6	302,30	**xxxxx**[1]
11,97	20	40	45	90	12	6	258,30	**11970**
11,98	20	40	45	90	12	6	258,30	**11980**
11,99	20	40	45	90	12	6	258,30	**11990**
12,00	20	40	45	90	12	6	258,30	**12000**
12,01	20	40	45	90	12	6	258,30	**12010**
12,02	20	40	45	90	12	6	258,30	**12020**
12,03	20	40	45	90	12	6	258,30	**12030**
12,04 - 12,05	20	40	45	90	12	6	302,30	**xxxxx**[1]
12,06 - 14,05	20	40	45	90	14	6	351,30	**xxxxx**[1]
14,06 - 15,96	20	40	45	93	16	6	406,50	**xxxxx**[1]
15,97 - 16,05	20	40	45	93	16	8	458,90	**xxxxx**[1]
16,06 - 18,05	20	47	52	100	18	8	486,70	**xxxxx**[1]
18,06 - 20,05	20	45	50	102	20	8	527,40	**xxxxx**[1]

P	●
M	●
K	●
N	○
S	○
H	○
O	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 83

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 488 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, long

▲ extremely irregular pitch
▲ designed for high-speed machining
▲ specialised geometries and coatings

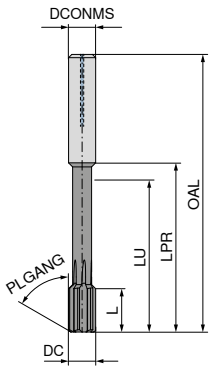

UNI	VA	ALU
DBG-U	DBQ	DBC-N

52P.57	52S.44	52N.17
Left Hand Helix	Left Hand Helix	straight flute
PLGANG 30°	PLGANG 30°	PLGANG 30°
ASG2210	ASG2231	ASG2270
Solid carbide	Solid carbide	Solid carbide
Through hole	Through hole	Through hole

DC H7 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 484 ... EUR U4/4R		40 401 ... EUR U4/4R		40 471 ... EUR U4/4R	
4	12	28	32	60	4	4	175,30	**04000**	192,50	**04000**	192,50	**04000**[1)]
5	12	35	40	76	6	4	178,00	**05000**	195,30	**05000**	195,30	**05000**[1)]
6	12	35	40	76	6	4	181,90	**06000**	199,20	**06000**	199,20	**06000**[1)]
7	16	60	65	101	8	6	189,80	**07000**	208,50	**07000**	208,50	**07000**[1)]
8	16	60	65	101	8	6	189,80	**08000**	208,50	**08000**	208,50	**08000**[1)]
9	16	63	68	108	10	6	268,20	**09000**	296,10	**09000**	296,10	**09000**[1)]
10	16	63	68	108	10	6	268,20	**10000**	296,10	**10000**	296,10	**10000**[1)]
11	20	80	85	130	12	6	355,80	**11000**	390,40	**11000**	390,40	**11000**[1)]
12	20	80	85	130	12	6	355,80	**12000**	390,40	**12000**	390,40	**12000**[1)]
16	20	97	102	150	16	6	467,40	**16000**	513,90	**16000**	513,90	**16000**[1)]
P							●		●			
M							●		●			
K							●					
N							○				●	
S							○					
H							○					
O											○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 81+82

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

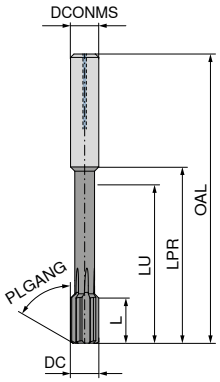

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A

	52P.57	52S.44	52J.65	52N.17	52G.55
	Left Hand Helix	Left Hand Helix	straight flute	straight flute	straight flute
	PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°
	ASG2210	ASG2231	ASG2350	ASG2270	ASG2360
	Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
	Through hole	Through hole	Through hole	Through hole	Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 486 ... EUR U4/4R		40 403 ... EUR U4/4R		40 477 ... EUR U4/4R		40 473 ... EUR U4/4R		40 475 ... EUR U4/4R	
2,96 - 3,96	12	28	32	60	4	4	219,10	xxxxx[2]	224,20	xxxxx[1]			224,20	xxxxx[1]	224,20	xxxxx[1]
2,96 - 3,96	12	28	32	60	4	6					224,20	xxxxx[1]				
3,97	12	28	32	60	4	4	185,90	03970	204,50	03970[1]			224,20	03970[1]	224,20	03970[1]
3,97	12	28	32	60	4	6					224,20	03970[1]				
3,98	12	28	32	60	4	4	185,90	03980	204,50	03980[1]			224,20	03980[1]	224,20	03980[1]
3,98	12	28	32	60	4	6					224,20	03980[1]				
3,99	12	28	32	60	4	4	185,90	03990	204,50	03990[1]			224,20	03990[1]	224,20	03990[1]
3,99	12	28	32	60	4	6					224,20	03990[1]				
4,00	12	28	32	60	4	4	185,90	04000	204,50	04000[1]			224,20	04000[1]	224,20	04000[1]
4,00	12	28	32	60	4	6					224,20	04000[1]				
4,01	12	28	32	60	4	4	185,90	04010	204,50	04010[1]			224,20	04010[1]	224,20	04010[1]
4,01	12	28	32	60	4	6					224,20	04010[1]				
4,02	12	28	32	60	4	4	185,90	04020	204,50	04020[1]			224,20	04020[1]	224,20	04020[1]
4,02	12	28	32	60	4	6					224,20	04020[1]				
4,03	12	28	32	60	4	4	185,90	04030	204,50	04030[1]			224,20	04030[1]	224,20	04040[1]
4,03	12	28	32	60	4	6					224,20	04030[1]				
4,04 - 4,05	12	28	32	60	4	4	219,10	xxxxx[2]	224,20	xxxxx[1]			224,20	xxxxx[1]	224,20	xxxxx[1]
4,04 - 4,05	12	28	32	60	4	6					224,20	xxxxx[1]				
4,06 - 4,96	12	35	40	76	6	4	222,40	xxxxx[2]	232,40	xxxxx[1]			232,40	xxxxx[1]	232,40	xxxxx[1]
4,06 - 4,96	12	35	40	76	6	6					232,40	xxxxx[1]				
4,97	12	35	40	76	6	4	189,80	04970	208,50	04970[1]			232,40	04970[1]	232,40	04970[1]
4,97	12	35	40	76	6	6					232,40	04970[1]				
4,98	12	35	40	76	6	4	189,80	04980	208,50	04980[1]			232,40	04980[1]	232,40	04980[1]
4,98	12	35	40	76	6	6					232,40	04980[1]				
4,99	12	35	40	76	6	4	189,80	04990	208,50	04990[1]			232,40	04990[1]	232,40	04990[1]
4,99	12	35	40	76	6	6					232,40	04990[1]				
5,00	12	35	40	76	6	4	189,80	05000	208,50	05000[1]			232,40	05000[1]	232,40	05000[1]
5,00	12	35	40	76	6	6					232,40	05000[1]				
5,01	12	35	40	76	6	4	189,80	05010	208,50	05010[1]			232,40	05010[1]	232,40	05010[1]
5,01	12	35	40	76	6	6					232,40	05010[1]				
5,02	12	35	40	76	6	4	189,80	05020	208,50	05020[1]			232,40	05020[1]	232,40	05020[1]

P	●	●				
M	●	●				
K	●		●			
N	○			●		
S	○					
H	○					●
O				○		

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 486 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

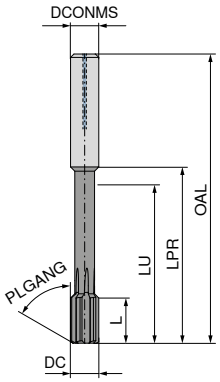

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52P.57	52S.44	52J.65	52N.17	52G.55
Left Hand Helix	Left Hand Helix	straight flute	straight flute	straight flute
PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°
ASG2210	ASG2231	ASG2350	ASG2270	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Through hole	Through hole	Through hole	Through hole	Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 486 ... EUR U4/4R		40 403 ... EUR U4/4R		40 477 ... EUR U4/4R		40 473 ... EUR U4/4R		40 475 ... EUR U4/4R	
5,02	12	35	40	76	6	6					232,40	**05020**[1]				
5,03	12	35	40	76	6	4	189,80	**05030**	208,50	**05030**[1]			232,40	**05030**[1]	232,40	**05030**[1]
5,03	12	35	40	76	6	6					232,40	**05030**[1]				
5,04 - 5,96	12	35	40	76	6	4	222,40	**xxxxx**[2]	232,40	**xxxxx**[1]			232,40	**xxxxx**[1]	232,40	**xxxxx**[1]
5,04 - 5,96	12	35	40	76	6	6					232,40	**xxxxx**[1]				
5,97	12	35	40	76	6	4	191,30	**05970**	211,20	**05970**[1]			232,40	**05970**[1]	232,40	**05970**[1]
5,97	12	35	40	76	6	6					232,40	**05970**[1]				
5,98	12	35	40	76	6	4	191,30	**05980**	211,20	**05980**[1]			232,40	**05980**[1]	232,40	**05980**[1]
5,98	12	35	40	76	6	6					232,40	**05980**[1]				
5,99	12	35	40	76	6	4	191,30	**05990**	211,20	**05990**[1]			232,40	**05990**[1]	232,40	**05990**[1]
5,99	12	35	40	76	6	6					232,40	**05990**[1]				
6,00	12	35	40	76	6	4	191,30	**06000**	211,20	**06000**[1]			232,40	**06000**[1]	232,40	**06000**[1]
6,00	12	35	40	76	6	6					232,40	**06000**[1]				
6,01	12	35	40	76	6	4	191,30	**06010**	211,20	**06010**[1]			232,40	**06010**[1]	232,40	**06010**[1]
6,01	12	35	40	76	6	6					232,40	**06010**[1]				
6,02	12	35	40	76	6	4	191,30	**06020**	211,20	**06020**[1]			232,40	**06020**[1]	232,40	**06020**[1]
6,02	12	35	40	76	6	6					232,40	**06020**[1]				
6,03	12	35	40	76	6	4	191,30	**06030**	211,20	**06030**[1]			232,40	**06030**[1]	232,40	**06030**[1]
6,03	12	35	40	76	6	6					232,40	**06030**[1]				
6,04 - 6,05	12	35	40	76	6	4	222,40	**xxxxx**[2]	232,40	**xxxxx**[1]			232,40	**xxxxx**[1]	232,40	**xxxxx**[1]
6,04 - 6,05	12	35	40	76	6	6					232,40	**xxxxx**[1]				
6,06 - 7,96	16	60	65	101	8	6	234,20	**xxxxx**[2]	239,10	**xxxxx**[1]			239,10	**xxxxx**[1]	239,10	**xxxxx**[1]
6,06 - 7,96	16	60	65	101	8	8					239,10	**xxxxx**[1]				
7,97	16	60	65	101	8	6	200,50	**07970**	220,30	**07970**[1]			239,10	**07970**[1]	239,10	**07970**[1]
7,97	16	60	65	101	8	8					239,10	**07970**[1]				
7,98	16	60	65	101	8	6	200,50	**07980**	220,30	**07980**[1]			239,10	**07980**[1]	239,10	**07980**[1]
7,98	16	60	65	101	8	8					239,10	**07980**[1]				
7,99	16	60	65	101	8	6	200,50	**07990**	220,30	**07990**[1]			239,10	**07990**[1]	239,10	**07990**[1]
7,99	16	60	65	101	8	8					239,10	**07990**[1]				
8,00	16	60	65	101	8	6	200,50	**08000**	220,30	**08000**[1]			239,10	**08000**[1]	239,10	**08000**[1]
8,00	16	60	65	101	8	8					239,10	**08000**[1]				

P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 486 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

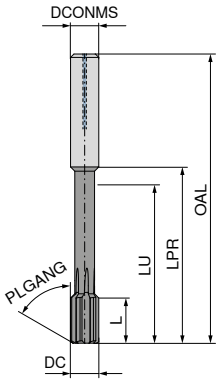

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A

	52P.57	52S.44	52J.65	52N.17	52G.55
	Left Hand Helix	Left Hand Helix	straight flute	straight flute	straight flute
	PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°
	ASG2210	ASG2231	ASG2350	ASG2270	ASG2360
	Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
	Through hole	Through hole	Through hole	Through hole	Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 486 ... EUR U4/4R		40 403 ... EUR U4/4R		40 477 ... EUR U4/4R		40 473 ... EUR U4/4R		40 475 ... EUR U4/4R	
8,01	16	60	65	101	8	6	200,50	**08010**	220,30	**08010**[1]			239,10	**08010**[1]	239,10	**08010**[1]
8,01	16	60	65	101	8	8					239,10	**08010**[1]				
8,02	16	60	65	101	8	6	200,50	**08020**	220,30	**08020**[1]			239,10	**08020**[1]	239,10	**08020**[1]
8,02	16	60	65	101	8	8					239,10	**08020**[1]				
8,03	16	60	65	101	8	6	200,50	**08030**	220,30	**08030**[1]			239,10	**08030**[1]	239,10	**08030**[1]
8,03	16	60	65	101	8	8					239,10	**08030**[1]				
8,04 - 8,05	16	60	65	101	8	6	234,20	**xxxxx**[2]	239,10	**xxxxx**[1]			239,10	**xxxxx**[1]	239,10	**xxxxx**[1]
8,04 - 8,05	16	60	65	101	8	8					239,10	**xxxxx**[1]				
8,06 - 9,96	16	63	68	108	10	6	290,60	**xxxxx**[2]	337,10	**xxxxx**[1]			337,10	**xxxxx**[1]	337,10	**xxxxx**[1]
8,06 - 9,96	16	63	68	108	10	8					337,10	**xxxxx**[1]				
9,97	16	63	68	108	10	6	285,50	**09970**	314,70	**09970**[1]			337,10	**09970**[1]	337,10	**09970**[1]
9,97	16	63	68	108	10	8					337,10	**09970**[1]				
9,98	16	63	68	108	10	6	285,50	**09980**	314,70	**09980**[1]			337,10	**09980**[1]	337,10	**09980**[1]
9,98	16	63	68	108	10	8					337,10	**09980**[1]				
9,99	16	63	68	108	10	6	285,50	**09990**	314,70	**09990**[1]			337,10	**09990**[1]	337,10	**09990**[1]
9,99	16	63	68	108	10	8					337,10	**09990**[1]				
10,00	16	63	68	108	10	6	285,50	**10000**	314,70	**10000**[1]			337,10	**10000**[1]	337,10	**10000**[1]
10,00	16	63	68	108	10	8					337,10	**10000**[1]				
10,01	16	63	68	108	10	6	285,50	**10010**	314,70	**10010**[1]			337,10	**10010**[1]	337,10	**10010**[1]
10,01	16	63	68	108	10	8					337,10	**10010**[1]				
10,02	16	63	68	108	10	6	285,50	**10020**	314,70	**10020**[1]			337,10	**10020**[1]	337,10	**10020**[1]
10,02	16	63	68	108	10	8					337,10	**10020**[1]				
10,03	16	63	68	108	10	6	285,50	**10030**	314,70	**10030**[1]			337,10	**10030**[1]	337,10	**10030**[1]
10,03	16	63	68	108	10	8					337,10	**10030**[1]				
10,04 - 10,05	16	63	68	108	10	6	290,60	**xxxxx**[2]	337,10	**xxxxx**[1]			337,10	**xxxxx**[1]	337,10	**xxxxx**[1]
10,04 - 10,05	16	63	68	108	10	8					337,10	**xxxxx**[1]				
10,06 - 11,96	20	80	85	130	12	6	438,20	**xxxxx**[2]	451,50	**xxxxx**[1]			451,50	**xxxxx**[1]	451,50	**xxxxx**[1]
10,06 - 11,96	20	80	85	130	12	8					451,50	**xxxxx**[1]				
11,97	20	80	85	130	12	6	379,80	**11970**	418,30	**11970**[1]			451,50	**11970**[1]	451,50	**11970**[1]
11,97	20	80	85	130	12	8					451,50	**11970**[1]				
11,98	20	80	85	130	12	6	379,80	**11980**	418,30	**11980**[1]			451,50	**11980**[1]	451,50	**11980**[1]

P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 486 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

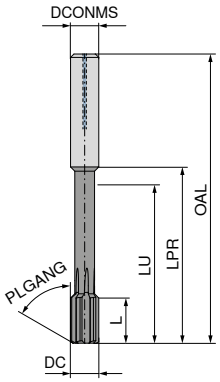

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A
52P.57	52S.44	52J.65	52N.17	52G.55
Left Hand Helix	Left Hand Helix	straight flute	straight flute	straight flute
PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°	PLGANG 30°
ASG2210	ASG2231	ASG2350	ASG2270	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Through hole	Through hole	Through hole	Through hole	Through hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 486 ... EUR U4/4R		40 403 ... EUR U4/4R		40 477 ... EUR U4/4R		40 473 ... EUR U4/4R		40 475 ... EUR U4/4R	
11,98	20	80	85	130	12	8					451,50	**11980**[1]				
11,99	20	80	85	130	12	6	379,80	**11990**	418,30	**11990**[1]			451,50	**11990**[1]	451,50	**11990**[1]
11,99	20	80	85	130	12	8					451,50	**11990**[1]				
12,00	20	80	85	130	12	6	379,80	**12000**	418,30	**12000**[1]			451,50	**12000**[1]	451,50	**12000**[1]
12,00	20	80	85	130	12	8					451,50	**12000**[1]				
12,01	20	80	85	130	12	6	379,80	**12010**	418,30	**12010**[1]			451,50	**12010**[1]	451,50	**12010**[1]
12,01	20	80	85	130	12	8					451,50	**12010**[1]				
12,02	20	80	85	130	12	6	379,80	**12020**	418,30	**12020**[1]			451,50	**12020**[1]	451,50	**12020**[1]
12,02	20	80	85	130	12	8					451,50	**12020**[1]				
12,03	20	80	85	130	12	6	379,80	**12030**	418,30	**12030**[1]			451,50	**12030**[1]	451,50	**12030**[1]
12,03	20	80	85	130	12	8					451,50	**12030**[1]				
12,04 - 12,05	20	80	85	130	12	6	438,20	**xxxxx**[2]	451,50	**xxxxx**[1]			451,50	**xxxxx**[1]	451,50	**xxxxx**[1]
12,04 - 12,05	20	80	85	130	12	8					451,50	**xxxxx**[1]				
12,06 - 14,05	20	80	85	130	14	6	511,20	**xxxxx**[2]	526,30	**xxxxx**[1]			526,30	**xxxxx**[1]	526,30	**xxxxx**[1]
12,06 - 14,05	20	80	85	130	14	8					526,30	**xxxxx**[1]				
14,06 - 16,05	20	97	102	150	16	6	582,70	**xxxxx**[2]	597,50	**xxxxx**[1]			597,50	**xxxxx**[1]	597,50	**xxxxx**[1]
14,06 - 16,05	20	97	102	150	16	8					597,50	**xxxxx**[1]				
16,06 - 18,05	20	97	102	150	18	6	620,80	**xxxxx**[2]	649,10	**xxxxx**[1]			649,10	**xxxxx**[1]	649,10	**xxxxx**[1]
16,06 - 18,05	20	97	102	150	18	8					649,10	**xxxxx**[1]				
18,06 - 20,05	20	105	110	160	20	6	659,10	**xxxxx**[2]	683,90	**xxxxx**[1]			683,90	**xxxxx**[1]	683,90	**xxxxx**[1]
18,06 - 20,05	20	105	110	160	20	8					683,90	**xxxxx**[1]				

P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 486 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, long

▲ extremely irregular pitch
▲ designed for high-speed machining
▲ specialised geometries and coatings

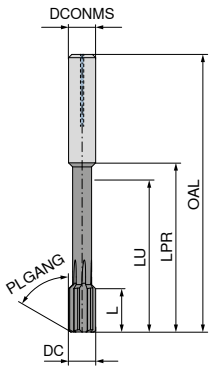

UNI	VA	ALU
DBG-U	DBQ	DBC-N
52M.57	52T.45	52Q.17
straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 60°
ASG2110	ASG2131	ASG2170
Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole

DC $_{H7}$ mm	L mm	LU mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	40 485 ... EUR U4/4R		40 402 ... EUR U4/4R		40 472 ... EUR U4/4R	
4	12	28	32	60	4	4	146,00	**04000**	160,60	**04000**	160,60	**04000**[1)]
5	12	35	40	76	6	4	148,70	**05000**	164,80	**05000**	164,80	**05000**[1)]
6	12	35	40	76	6	4	155,40	**06000**	171,30	**06000**	171,30	**06000**[1)]
7	16	60	65	101	8	6	163,30	**07000**	179,20	**07000**	179,20	**07000**[1)]
8	16	60	65	101	8	6	163,30	**08000**	179,20	**08000**	179,20	**08000**[1)]
9	16	63	68	108	10	6	233,70	**09000**	257,70	**09000**	257,70	**09000**[1)]
10	16	63	68	108	10	6	233,70	**10000**	257,70	**10000**	257,70	**10000**[1)]
11	20	80	85	130	12	6	310,80	**11000**	341,30	**11000**	341,30	**11000**[1)]
12	20	80	85	130	12	6	310,80	**12000**	341,30	**12000**	341,30	**12000**[1)]
16	20	97	102	150	16	6	418,30	**16000**	460,90	**16000**	460,90	**16000**[1)]
P							●		●			
M							●		●			
K							●					
N							○				●	
S							○					
H							○					
O											○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

→ v_c Page 81+82

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

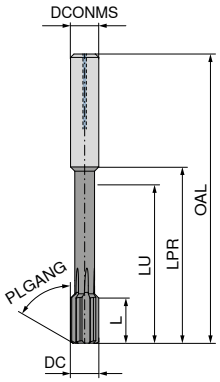

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A

52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 487 ... EUR U4/4R		40 404 ... EUR U4/4R		40 478 ... EUR U4/4R		40 474 ... EUR U4/4R		40 476 ... EUR U4/4R	
2,96 - 3,96	12	28	32	60	4	4	182,60	xxxxx[2]	189,20	xxxxx[1]			189,20	xxxxx[1]	189,20	xxxxx[1]
2,96 - 3,96	12	28	32	60	4	6					189,20	xxxxx[1]				
3,97	12	28	32	60	4	4	156,60	03970	172,70	03970[1]			189,20	03970[1]	189,20	03970[1]
3,97	12	28	32	60	4	6					189,20	03970[1]				
3,98	12	28	32	60	4	4	156,60	03980	172,70	03980[1]			189,20	03980[1]	189,20	03980[1]
3,98	12	28	32	60	4	6					189,20	03980[1]				
3,99	12	28	32	60	4	4	156,60	03990	172,70	03990[1]			189,20	03990[1]	189,20	03990[1]
3,99	12	28	32	60	4	6					189,20	03990[1]				
4,00	12	28	32	60	4	4	156,60	04000	172,70	04000[1]			189,20	04000[1]	189,20	04000[1]
4,00	12	28	32	60	4	6					189,20	04000[1]				
4,01	12	28	32	60	4	4	156,60	04010	172,70	04010[1]			189,20	04010[1]	189,20	04010[1]
4,01	12	28	32	60	4	6					189,20	04010[1]				
4,02	12	28	32	60	4	4	156,60	04020	172,70	04020[1]			189,20	04020[1]	189,20	04020[1]
4,02	12	28	32	60	4	6					189,20	04020[1]				
4,03	12	28	32	60	4	4	156,60	04030	172,70	04030[1]			189,20	04030[1]	189,20	04030[1]
4,03	12	28	32	60	4	6					189,20	04030[1]				
4,04 - 4,05	12	28	32	60	4	4	182,60	xxxxx[2]	189,20	xxxxx[1]			189,20	xxxxx[1]	189,20	xxxxx[1]
4,04 - 4,05	12	28	32	60	4	6					189,20	xxxxx[1]				
4,06 - 4,96	12	35	40	76	6	4	187,70	xxxxx[2]	194,30	xxxxx[1]			194,30	xxxxx[1]	194,30	xxxxx[1]
4,06 - 4,96	12	35	40	76	6	6					194,30	xxxxx[1]				
4,97	12	35	40	76	6	4	160,60	04970	175,30	04970[1]			194,30	04970[1]	194,30	04970[1]
4,97	12	35	40	76	6	6					194,30	04970[1]				
4,98	12	35	40	76	6	4	160,60	04980	175,30	04980[1]			194,30	04980[1]	194,30	04980[1]
4,98	12	35	40	76	6	6					194,30	04980[1]				
4,99	12	35	40	76	6	4	160,60	04990	175,30	04990[1]			194,30	04990[1]	194,30	04990[1]
4,99	12	35	40	76	6	6					194,30	04990[1]				
5,00	12	35	40	76	6	4	160,60	05000	175,30	05000[1]			194,30	05000[1]	194,30	05000[1]
5,00	12	35	40	76	6	6					194,30	05000[1]				
5,01	12	35	40	76	6	4	160,60	05010	175,30	05010[1]			194,30	05010[1]	194,30	05010[1]
5,01	12	35	40	76	6	6					194,30	05010[1]				
5,02	12	35	40	76	6	4	160,60	05020	175,30	05020[1]			194,30	05020[1]	194,30	05020[1]

P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 487 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

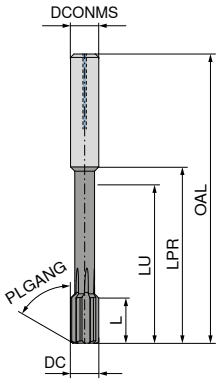

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A

52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 487 ... EUR U4/4R		40 404 ... EUR U4/4R		40 478 ... EUR U4/4R		40 474 ... EUR U4/4R		40 476 ... EUR U4/4R	
5,02	12	35	40	76	6	6					194,30	**05020**[1]				
5,03	12	35	40	76	6	4	160,60	**05030**	175,30	**05030**[1]			194,30	**05030**[1]	194,30	**05030**[1]
5,03	12	35	40	76	6	6					194,30	**05030**[1]				
5,04 - 5,96	12	35	40	76	6	4	187,70	**xxxxx**[2]	194,30	**xxxxx**[1]			194,30	**xxxxx**[1]	194,30	**xxxxx**[1]
5,04 - 5,96	12	35	40	76	6	6					194,30	**xxxxx**[1]				
5,97	12	35	40	76	6	4	163,30	**05970**	179,20	**05970**[1]			194,30	**05970**[1]	194,30	**05970**[1]
5,97	12	35	40	76	6	6					194,30	**05970**[1]				
5,98	12	35	40	76	6	4	163,30	**05980**	179,20	**05980**[1]			194,30	**05980**[1]	194,30	**05980**[1]
5,98	12	35	40	76	6	6					194,30	**05980**[1]				
5,99	12	35	40	76	6	4	163,30	**05990**	179,20	**05990**[1]			194,30	**05990**[1]	194,30	**05990**[1]
5,99	12	35	40	76	6	6					194,30	**05990**[1]				
6,00	12	35	40	76	6	4	163,30	**06000**	179,20	**06000**[1]			194,30	**06000**[1]	194,30	**06000**[1]
6,00	12	35	40	76	6	6					194,30	**06000**[1]				
6,01	12	35	40	76	6	4	163,30	**06010**	179,20	**06010**[1]			194,30	**06010**[1]	194,30	**06010**[1]
6,01	12	35	40	76	6	6					194,30	**06010**[1]				
6,02	12	35	40	76	6	4	163,30	**06020**	179,20	**06020**[1]			194,30	**06020**[1]	194,30	**06020**[1]
6,02	12	35	40	76	6	6					194,30	**06020**[1]				
6,03	12	35	40	76	6	4	163,30	**06030**	179,20	**06030**[1]			194,30	**06030**[1]	194,30	**06030**[1]
6,03	12	35	40	76	6	6					194,30	**06030**[1]				
6,04 - 6,05	12	35	40	76	6	4	187,70	**xxxxx**[2]	194,30	**xxxxx**[1]			194,30	**xxxxx**[1]	194,30	**xxxxx**[1]
6,04 - 6,05	12	35	40	76	6	6					194,30	**xxxxx**[1]				
6,06 - 7,96	16	60	65	101	8	6	202,50	**xxxxx**[2]	209,10	**xxxxx**[1]			209,10	**xxxxx**[1]	209,10	**xxxxx**[1]
6,06 - 7,96	16	60	65	101	8	8					209,10	**xxxxx**[1]				
7,97	16	60	65	101	8	6	171,30	**07970**	188,60	**07970**[1]			209,10	**07970**[1]	209,10	**07970**[1]
7,97	16	60	65	101	8	8					209,10	**07970**[1]				
7,98	16	60	65	101	8	6	171,30	**07980**	188,60	**07980**[1]			209,10	**07980**[1]	209,10	**07980**[1]
7,98	16	60	65	101	8	8					209,10	**07980**[1]				
7,99	16	60	65	101	8	6	171,30	**07990**	188,60	**07990**[1]			209,10	**07990**[1]	209,10	**07990**[1]
7,99	16	60	65	101	8	8					209,10	**07990**[1]				
8,00	16	60	65	101	8	6	171,30	**08000**	188,60	**08000**[1]			209,10	**08000**[1]	209,10	**08000**[1]
8,00	16	60	65	101	8	8					209,10	**08000**[1]				

P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 487 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

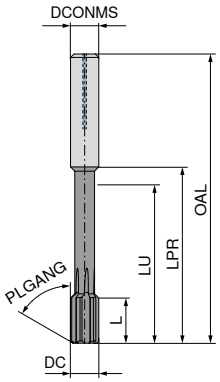

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A

52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 487 ... EUR U4/4R		40 404 ... EUR U4/4R		40 478 ... EUR U4/4R		40 474 ... EUR U4/4R		40 476 ... EUR U4/4R	
8,01	16	60	65	101	8	6	171,30	08010	188,60	08010[1]			209,10	08010[1]	209,10	08010[1]
8,01	16	60	65	101	8	8					209,10	08010[1]				
8,02	16	60	65	101	8	6	171,30	08020	188,60	08020[1]			209,10	08020[1]	209,10	08020[1]
8,02	16	60	65	101	8	8					209,10	08020[1]				
8,03	16	60	65	101	8	6	171,30	08030	188,60	08030[1]			209,10	08030[1]	209,10	08030[1]
8,03	16	60	65	101	8	8					209,10	08030[1]				
8,04 - 8,05	16	60	65	101	8	6	202,50	xxxxx[2]	209,10	xxxxx[1]			209,10	xxxxx[1]	209,10	xxxxx[1]
8,04 - 8,05	16	60	65	101	8	8					209,10	xxxxx[1]				
8,06 - 9,96	16	63	68	108	10	6	257,40	xxxxx[2]	302,00	xxxxx[1]			302,00	xxxxx[1]	302,00	xxxxx[1]
8,06 - 9,96	16	63	68	108	10	8					302,00	xxxxx[1]				
9,97	16	63	68	108	10	6	249,60	09970	274,90	09970[1]			302,00	09970[1]	302,00	09970[1]
9,97	16	63	68	108	10	8					302,00	09970[1]				
9,98	16	63	68	108	10	6	249,60	09980	274,90	09980[1]			302,00	09980[1]	302,00	09980[1]
9,98	16	63	68	108	10	8					302,00	09980[1]				
9,99	16	63	68	108	10	6	249,60	09990	274,90	09990[1]			302,00	09990[1]	302,00	09990[1]
9,99	16	63	68	108	10	8					302,00	09990[1]				
10,00	16	63	68	108	10	6	249,60	10000	274,90	10000[1]			302,00	10000[1]	302,00	10000[1]
10,00	16	63	68	108	10	8					302,00	10000[1]				
10,01	16	63	68	108	10	6	249,60	10010	274,90	10010[1]			302,00	10010[1]	302,00	10010[1]
10,01	16	63	68	108	10	8					302,00	10010[1]				
10,02	16	63	68	108	10	6	249,60	10020	274,90	10020[1]			302,00	10020[1]	302,00	10020[1]
10,02	16	63	68	108	10	8					302,00	10020[1]				
10,03	16	63	68	108	10	6	249,60	10030	274,90	10030[1]			302,00	10030[1]	302,00	10030[1]
10,03	16	63	68	108	10	8					302,00	10030[1]				
10,04 - 10,05	16	63	68	108	10	6	257,40	xxxxx[2]	302,00	xxxxx[1]			302,00	xxxxx[1]	302,00	xxxxx[1]
10,04 - 10,05	16	63	68	108	10	8					302,00	xxxxx[1]				
10,06 - 11,96	20	80	85	130	12	6	390,20	xxxxx[2]	411,60	xxxxx[1]			411,60	xxxxx[1]	411,60	xxxxx[1]
10,06 - 11,96	20	80	85	130	12	8					411,60	xxxxx[1]				
11,97	20	80	85	130	12	6	333,30	11970	366,50	11970[1]			411,60	11970[1]	411,60	11970[1]
11,97	20	80	85	130	12	8					411,60	11970[1]				
11,98	20	80	85	130	12	6	333,30	11980	366,50	11980[1]			411,60	11980[1]	411,60	11980[1]

P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces
2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 487 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

Continued on next page

Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings
- ▲ tolerance: Ø 2,96 – 5,96 mm = +0,004 mm
- ▲ tolerance: Ø 5,97 – 20,05 mm = +0,005 mm

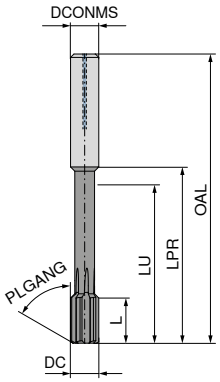

UNI	VA	K	ALU	H
DBG-U	DBQ	DBG-P	DBC-N	DBF-A

52M.57	52T.45	52K.65	52Q.17	52H.55
straight flute	straight flute	straight flute	straight flute	straight flute
PLGANG 60°	PLGANG 45°	PLGANG 30°	PLGANG 60°	PLGANG 30°
ASG2110	ASG2131	ASG2350	ASG2170	ASG2360
Solid carbide	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Blind hole	Blind hole	Blind hole	Blind hole	Blind hole

DC +0,004/+0,005 mm	L mm	LU mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	40 487 ... EUR U4/4R		40 404 ... EUR U4/4R		40 478 ... EUR U4/4R		40 474 ... EUR U4/4R		40 476 ... EUR U4/4R	
11,98	20	80	85	130	12	8					411,60	**11980**[1]				
11,99	20	80	85	130	12	6	333,30	**11990**	366,50	**11990**[1]			411,60	**11990**[1]	411,60	**11990**[1]
11,99	20	80	85	130	12	8					411,60	**11990**[1]				
12,00	20	80	85	130	12	6	333,30	**12000**	366,50	**12000**[1]			411,60	**12000**[1]	411,60	**12000**[1]
12,00	20	80	85	130	12	8					411,60	**12000**[1]				
12,01	20	80	85	130	12	6	333,30	**12010**	366,50	**12010**[1]			411,60	**12010**[1]	411,60	**12010**[1]
12,01	20	80	85	130	12	8					411,60	**12010**[1]				
12,02	20	80	85	130	12	6	333,30	**12020**	366,50	**12020**[1]			411,60	**12020**[1]	411,60	**12020**[1]
12,02	20	80	85	130	12	8					411,60	**12020**[1]				
12,03	20	80	85	130	12	6	333,30	**12030**	366,50	**12030**[1]			411,60	**12030**[1]	411,60	**12030**[1]
12,03	20	80	85	130	12	8					411,60	**12030**[1]				
12,04 - 12,05	20	80	85	130	12	6	390,20	**xxxxx**[2]	411,60	**xxxxx**[1]			411,60	**xxxxx**[1]	411,60	**xxxxx**[1]
12,04 - 12,05	20	80	85	130	12	8					411,60	**xxxxx**[1]				
12,06 - 14,05	20	80	85	130	14	6	453,30	**xxxxx**[2]	473,10	**xxxxx**[1]			473,10	**xxxxx**[1]	473,10	**xxxxx**[1]
12,06 - 14,05	20	80	85	130	14	8					473,10	**xxxxx**[1]				
14,06 - 16,05	20	97	102	150	16	6	524,40	**xxxxx**[2]	546,20	**xxxxx**[1]			546,20	**xxxxx**[1]	546,20	**xxxxx**[1]
14,06 - 16,05	20	97	102	150	16	8					546,20	**xxxxx**[1]				
16,06 - 18,05	20	97	102	150	18	6	556,20	**xxxxx**[2]	577,60	**xxxxx**[1]			577,60	**xxxxx**[1]	577,60	**xxxxx**[1]
16,06 - 18,05	20	97	102	150	18	8					577,60	**xxxxx**[1]				
18,06 - 20,05	20	105	110	160	20	6	602,60	**xxxxx**[2]	620,80	**xxxxx**[1]			620,80	**xxxxx**[1]	620,80	**xxxxx**[1]
18,06 - 20,05	20	105	110	160	20	8					620,80	**xxxxx**[1]				

	40 487 ...	40 404 ...	40 478 ...	40 474 ...	40 476 ...
P	●	●			
M	●	●			
K	●		●		
N	○			●	
S	○				
H	○				●
O				○	

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request

→ v_c Page 81+82

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.82 mm → Article No. 40 487 08820)!

→ **Page 100**
Here you will find more information on chamfer geometries (ASG).

NC machine reamers, DIN 8093-2B

- ▲ extremely irregular pitch
- ▲ Ø 2–3.5 mm with centres both ends
- ▲ Ø 4–13 mm with protected centres
- ▲ from Ø 22 mm, similar to DIN 8093-2B
- ▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC



Left Hand Helix
Solid carbide
Through hole

40 420 ...

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4		
2,0	12	18,5	50	3	4	56,94	**020**	
2,5	16	29,0	60	3	4	56,94	**025**	
3,0	17	33,0	65	4	6	59,25	**030**	
3,2	18	33,0	65	4	6	59,25	**032**	
3,5	18	43,0	75	4	6	59,25	**035**	
4,0	19	43,0	75	4	6	70,98	**040**	
4,5	21	39,0	80	6	6	70,98	**045**	
5,0	23	52,0	93	6	6	79,67	**050**	
5,5	26	53,0	93	6	6	79,67	**055**	
6,0	26	53,0	93	6	6	85,74	**060**	
6,5	28	61,0	101	6	6	85,74	**065**	
7,0	31	68,0	109	8	6	95,04	**070**	
7,5	31	68,0	109	8	6	95,04	**075**	
8,0	33	77,0	117	8	6	110,80	**080**	
8,5	33	77,0	117	8	6	110,80	**085**	
9,0	36	80,0	125	10	6	120,80	**090**	
9,5	36	80,0	125	10	6	120,80	**095**	
10,0	38	88,0	133	10	6	129,20	**100**	
10,5	38	88,0	133	10	6	129,20	**105**	
11,0	41	97,0	142	10	6	166,60	**110**	
12,0	44	100,0	151	12	6	166,60	**120**	
13,0	44	100,0	151	12	6	163,70	**130**	
14,0	47	106,0	160	16	6	163,70	**140**	1)
15,0	50	108,0	162	16	6	172,60	**150**	1)
16,0	52	116,0	170	16	6	181,10	**160**	1)
17,0	52	121,0	175	18	6	184,00	**170**	1)
18,0	52	128,0	182	18	6	185,40	**180**	1)
19,0	52	133,0	189	20	6	194,30	**190**	1)
20,0	52	139,0	195	20	6	194,30	**200**	1)
22,0	25	105,0	160	20	6	194,30	**220**	1)
24,0	25	125,0	180	20	8	237,60	**240**	1)
25,0	25	125,0	180	20	8	237,60	**250**	1)
26,0	25	125,0	180	20	8	265,30	**260**	1)
28,0	25	119,0	180	25	8	279,60	**280**	1)
30,0	25	139,0	200	25	8	289,80	**300**	1)

P	●
M	
K	○
N	●
S	
H	
O	●

→ v_c Page 84

1) with carbide cutting edges

NC machine reamers, DIN 8093-2B

- ▲ extremely irregular pitch
- ▲ Ø 2–3.5 mm with centres both ends
- ▲ Ø 4–13 mm with protected centres
- ▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC

TiAlN





Left Hand Helix
Solid carbide
Through hole

40 421 ...

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4		
2,0	12	18,5	50	3	4	68,54	**020**	
2,5	16	29,0	60	3	4	68,54	**025**	
3,0	17	33,0	65	4	6	71,55	**030**	
3,2	18	33,0	65	4	6	71,55	**032**	
3,5	18	43,0	75	4	6	71,55	**035**	
4,0	19	43,0	75	4	6	85,62	**040**	
4,5	21	39,0	80	6	6	85,62	**045**	
5,0	23	52,0	93	6	6	95,91	**050**	
5,5	26	53,0	93	6	6	95,91	**055**	
6,0	26	53,0	93	6	6	103,40	**060**	
6,5	28	61,0	101	6	6	103,40	**065**	
7,0	31	68,0	109	8	6	114,70	**070**	
7,5	31	68,0	109	8	6	114,70	**075**	
8,0	33	77,0	117	8	6	133,40	**080**	
8,5	33	77,0	117	8	6	133,40	**085**	
9,0	36	80,0	125	10	6	146,30	**090**	
9,5	36	80,0	125	10	6	146,30	**095**	
10,0	38	88,0	133	10	6	156,60	**100**	
10,5	38	88,0	133	10	6	156,60	**105**	
11,0	41	97,0	142	10	6	201,40	**110**	
12,0	44	100,0	151	12	6	201,40	**120**	
13,0	44	100,0	151	12	6	198,50	**130**	
14,0	47	106,0	160	16	6	198,50	**140**	1)
15,0	50	108,0	162	16	6	210,20	**150**	1)
16,0	52	116,0	170	16	6	215,80	**160**	1)
17,0	52	121,0	175	18	6	221,60	**170**	1)
18,0	52	128,0	182	18	6	223,10	**180**	1)
19,0	52	133,0	189	20	6	233,30	**190**	1)
20,0	52	139,0	195	20	6	236,10	**200**	1)

P	●
M	○
K	●
N	
S	○
H	○
O	

→ v_c Page 84

1) with carbide cutting edges

4

NC machine reamers, DIN 8093-2B

- ▲ 0.01 mm steps
- ▲ extremely irregular pitch
- ▲ PLGANG ≤ Ø 3.75 = 30° / > Ø 3.75 = 45°
- ▲ Ø 0.6–0.94 mm similar to DIN 8093-B
- ▲ Ø 0.95–3.75 mm with centres both ends
- ▲ Ø 3.76–12.05 mm with protected centres

NC 100



Left Hand Helix
Solid carbide
Through hole

DC +0,004 mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	40 430 ... EUR U4	
0,59 - 0,64	5	7,5	45	3	4	100,80	xxxxx[1]
0,65 - 0,74	5	7,5	45	3	4	100,80	xxxxx[1]
0,75 - 0,84	6	8,0	45	3	4	100,80	xxxxx[1]
0,85 - 0,95	6	8,0	45	3	4	100,80	xxxxx[1]
0,96	6	17,5	50	3	3	90,54	00960[1]
0,97	6	17,5	50	3	3	90,54	00970[1]
0,98	6	17,5	50	3	3	90,54	00980[2]
0,99	6	17,5	50	3	3	90,54	00990[2]
1,00	6	17,5	50	3	3	90,54	01000[2]
1,01	6	17,5	50	3	3	90,54	01010[2]
1,02	6	17,5	50	3	3	90,54	01020[2]
1,03	6	17,5	50	3	3	90,54	01030[2]
1,04 - 1,06	6	17,5	50	3	3	90,54	xxxxx[2]
1,07 - 1,18	9	17,5	50	3	3	90,54	xxxxx[2]
1,19 - 1,32	9	17,5	50	3	3	90,54	xxxxx[2]
1,33 - 1,50	9	18,0	50	3	3	90,54	xxxxx[2]
1,51 - 1,70	10	18,0	50	3	3	90,54	xxxxx[2]
1,71 - 1,90	11	18,5	50	3	4	90,54	xxxxx[2]
1,91 - 1,97	12	18,5	50	3	4	102,40	xxxxx[2]
1,98	12	18,5	50	3	4	102,40	01980
1,99	12	18,5	50	3	4	102,40	01990
2,00	12	18,5	50	3	4	102,40	02000
2,01	12	18,5	50	3	4	102,40	02010
2,02	12	18,5	50	3	4	102,40	02020
2,03	12	18,5	50	3	4	102,40	02030
2,04 - 2,12	12	18,5	50	3	4	102,40	xxxxx[2]
2,13 - 2,36	12	18,5	50	3	4	102,40	xxxxx[2]
2,37 - 2,47	16	29,0	60	3	4	78,80	xxxxx[2]
2,48	16	29,0	60	3	4	78,80	02480
2,49	16	29,0	60	3	4	78,80	02490
2,50	16	29,0	60	3	4	78,80	02500
2,51	16	29,0	60	3	4	78,80	02510
2,52	16	29,0	60	3	4	78,80	02520
2,53	16	29,0	60	3	4	78,80	02530
2,54 - 2,65	16	29,0	60	3	4	78,80	xxxxx[2]
2,66 - 2,80	17	33,0	65	4	6	78,80	xxxxx[2]
2,81 - 2,96	17	33,0	65	4	6	67,64	xxxxx[2]
2,97	17	33,0	65	4	6	67,64	02970
2,98	17	33,0	65	4	6	67,64	02980
2,99	17	33,0	65	4	6	67,64	02990
3,00	17	33,0	65	4	6	59,25	03000
3,01	17	33,0	65	4	6	67,64	03010
3,02	17	33,0	65	4	6	67,64	03020
3,03	17	33,0	65	4	6	67,64	03030
3,04 - 3,35	18	33,0	65	4	6	79,67	xxxxx[2]
3,36 - 3,75	18	43,0	75	4	6	79,67	xxxxx[2]
3,76 - 3,96	19	43,0	75	4	6	79,67	xxxxx[2]
3,97	19	43,0	75	4	6	79,67	03970
3,98	19	43,0	75	4	6	79,67	03980
3,99	19	43,0	75	4	6	79,67	03990
4,00	19	43,0	75	4	6	70,98	04000
4,01	19	43,0	75	4	6	79,67	04010
4,02	19	43,0	75	4	6	79,67	04020
4,03	19	43,0	75	4	6	79,67	04030
4,04 - 4,25	19	43,0	75	4	6	79,67	xxxxx[2]
4,26 - 4,75	21	39,0	80	6	6	90,54	xxxxx[2]
4,76 - 4,96	23	52,0	93	6	6	90,54	xxxxx[2]
4,97	23	52,0	93	6	6	90,54	04970
4,98	23	52,0	93	6	6	90,54	04980
4,99	23	52,0	93	6	6	90,54	04990
5,00	23	52,0	93	6	6	79,67	05000
5,01	23	52,0	93	6	6	90,54	05010
5,02	23	52,0	93	6	6	90,54	05020
5,03	23	52,0	93	6	6	90,54	05030
5,04 - 5,30	23	52,0	93	6	6	90,54	xxxxx[2]
5,31 - 5,96	26	53,0	93	6	6	98,66	xxxxx[2]
5,97	26	53,0	93	6	6	97,94	05970
5,98	26	53,0	93	6	6	97,94	05980
5,99	26	53,0	93	6	6	97,94	05990
6,00	26	53,0	93	6	6	85,74	06000
6,01	26	53,0	93	6	6	98,66	06010
6,02	26	53,0	93	6	6	98,66	06020
6,03	26	53,0	93	6	6	98,66	06030
6,04 - 6,70	28	61,0	101	6	6	118,50	xxxxx[2]
6,71 - 7,50	31	68,0	109	8	6	118,50	xxxxx[2]
7,51 - 7,96	33	77,0	117	8	6	118,50	xxxxx[2]
7,97	33	77,0	117	8	6	118,50	07970
7,98	33	77,0	117	8	6	118,50	07980
7,99	33	77,0	117	8	6	118,50	07990
8,00	33	77,0	117	8	6	110,80	08000
8,01	33	77,0	117	8	6	118,50	08010
8,02	33	77,0	117	8	6	118,50	08020
8,03	33	77,0	117	8	6	118,50	08030
8,04	33	77,0	117	8	6	118,50	08040
8,05 - 8,50	33	77,0	117	8	6	138,70	xxxxx[2]
8,51 - 9,04	36	80,0	125	10	6	138,70	xxxxx[2]
9,05 - 9,50	36	80,0	125	10	6	138,70	xxxxx[2]
9,51 - 9,96	38	88,0	133	10	6	138,70	xxxxx[2]
9,97	38	88,0	133	10	6	138,70	09970
9,98	38	88,0	133	10	6	138,70	09980
9,99	38	88,0	133	10	6	138,70	09990
10,00	38	88,0	133	10	6	129,20	10000
10,01	38	88,0	133	10	6	138,70	10010
10,02	38	88,0	133	10	6	138,70	10020
10,03	38	88,0	133	10	6	138,70	10030
10,04	38	88,0	133	10	6	138,70	10040
10,05	38	88,0	133	10	6	138,70	10050
10,06 - 10,60	38	88,0	133	10	6	166,60	xxxxx[2]
10,61 - 11,80	41	97,0	142	10	6	166,60	xxxxx[2]
11,81 - 11,96	44	100,0	151	12	6	166,60	xxxxx[2]
11,97	44	100,0	151	12	6	166,60	11970
11,98	44	100,0	151	12	6	166,60	11980
11,99	44	100,0	151	12	6	166,60	11990
12,00	44	100,0	151	12	6	157,80	12000
12,01	44	100,0	151	12	6	166,60	12010
12,02	44	100,0	151	12	6	166,60	12020
12,03	44	100,0	151	12	6	166,60	12030
12,04	44	100,0	151	12	6	166,60	12040
12,05	44	100,0	151	12	6	166,60	12050

P	●
M	
K	○
N	●
S	
H	
O	●

→ v_c Page 84

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 12 working days / Minimum order 3 pieces

2) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 10 working days

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.05 mm → Article no. 40 430 08050)!

NC machine reamers, DIN 8093-2B

- ▲ 0.01 mm steps
- ▲ extremely irregular pitch
- ▲ PLGANG ≤ Ø 3.75 = 30° / > Ø 3.75 = 45°
- ▲ Ø 0.6–0.94 mm similar to DIN 8093-B
- ▲ Ø 0.95–3.75 mm with centres both ends
- ▲ Ø 3.76–12.05 mm with protected centres

NC 100

TiAlN



Left Hand Helix
Solid carbide
Through hole

40 431 ...

DC +0,004 mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4	
1,00	6	17,5	50	3	3	109,40	01000[1]
1,01	6	17,5	50	3	3	109,40	01010[1]
1,02	6	17,5	50	3	3	109,40	01020[1]
1,03	6	17,5	50	3	3	109,40	01030[1]
1,04 - 1,06	6	17,5	50	3	3	109,40	xxxxx[1]
1,07 - 1,18	9	17,5	50	3	3	109,40	xxxxx[1]
1,19 - 1,32	9	17,5	50	3	3	109,40	xxxxx[1]
1,33 - 1,50	9	18,0	50	3	3	109,40	xxxxx[1]
1,51 - 1,70	10	18,0	50	3	3	109,40	xxxxx[1]
1,71 - 1,90	11	18,5	50	3	4	109,40	xxxxx[1]
1,91 - 1,97	12	18,5	50	3	4	123,70	xxxxx[1]
1,98	12	18,5	50	3	4	123,70	01980
1,99	12	18,5	50	3	4	123,70	01990
2,00	12	18,5	50	3	4	107,90	02000
2,01	12	18,5	50	3	4	123,70	02010
2,02	12	18,5	50	3	4	123,70	02020
2,03	12	18,5	50	3	4	123,70	02030
2,04 - 2,12	12	18,5	50	3	4	123,70	xxxxx[1]
2,13 - 2,36	12	18,5	50	3	4	123,70	xxxxx[1]
2,37 - 2,47	16	29,0	60	3	4	95,18	xxxxx[1]
2,48	16	29,0	60	3	4	95,18	02480
2,49	16	29,0	60	3	4	95,18	02490
2,50	16	29,0	60	3	4	95,18	02500
2,51	16	29,0	60	3	4	95,18	02510
2,52	16	29,0	60	3	4	95,18	02520
2,53	16	29,0	60	3	4	95,18	02530
2,54 - 2,65	16	29,0	60	3	4	95,18	xxxxx[1]
2,66 - 2,80	17	33,0	65	4	6	95,18	xxxxx[1]
2,81 - 2,96	17	33,0	65	4	6	81,84	xxxxx[1]
2,97	17	33,0	65	4	6	81,84	02970
2,98	17	33,0	65	4	6	81,84	02980
2,99	17	33,0	65	4	6	81,84	02990
3,00	17	33,0	65	4	6	71,55	03000
3,01	17	33,0	65	4	6	81,84	03010
3,02	17	33,0	65	4	6	81,84	03020
3,03	17	33,0	65	4	6	81,84	03030
3,04 - 3,35	18	33,0	65	4	6	95,91	xxxxx[1]
3,36 - 3,75	18	43,0	75	4	6	95,91	xxxxx[1]
3,76 - 3,96	19	43,0	75	4	6	95,91	xxxxx[1]
3,97	19	43,0	75	4	6	95,91	03970
3,98	19	43,0	75	4	6	95,91	03980
3,99	19	43,0	75	4	6	95,91	03990
4,00	19	43,0	75	4	6	85,62	04000
4,01	19	43,0	75	4	6	95,91	04010
4,02	19	43,0	75	4	6	95,91	04020
4,03	19	43,0	75	4	6	95,91	04030
4,04 - 4,25	19	43,0	75	4	6	95,91	xxxxx[1]
4,26 - 4,75	21	39,0	80	6	6	105,50	xxxxx[1]
4,76 - 4,96	23	52,0	93	6	6	105,50	xxxxx[1]
4,97	23	52,0	93	6	6	105,50	04970
4,98	23	52,0	93	6	6	105,50	04980

40 431 ...

DC +0,004 mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U4	
4,99	23	52,0	93	6	6	105,50	04990
5,00	23	52,0	93	6	6	95,91	05000
5,01	23	52,0	93	6	6	105,50	05010
5,02	23	52,0	93	6	6	105,50	05020
5,03	23	52,0	93	6	6	105,50	05030
5,04 - 5,30	23	52,0	93	6	6	105,50	xxxxx[1]
5,31 - 5,96	26	53,0	93	6	6	114,70	xxxxx[1]
5,97	26	53,0	93	6	6	114,70	05970
5,98	26	53,0	93	6	6	114,70	05980
5,99	26	53,0	93	6	6	114,70	05990
6,00	26	53,0	93	6	6	103,40	06000
6,01	26	53,0	93	6	6	114,70	06010
6,02	26	53,0	93	6	6	114,70	06020
6,03	26	53,0	93	6	6	114,70	06030
6,04 - 6,70	28	61,0	101	6	6	143,00	xxxxx[1]
6,71 - 7,50	31	68,0	109	8	6	143,00	xxxxx[1]
7,51 - 7,96	33	77,0	117	8	6	143,00	xxxxx[1]
7,97	33	77,0	117	8	6	143,00	07970
7,98	33	77,0	117	8	6	143,00	07980
7,99	33	77,0	117	8	6	143,00	07990
8,00	33	77,0	117	8	6	133,40	08000
8,01	33	77,0	117	8	6	143,00	08010
8,02	33	77,0	117	8	6	143,00	08020
8,03	33	77,0	117	8	6	143,00	08030
8,04	33	77,0	117	8	6	143,00	08040
8,05 - 8,50	33	77,0	117	8	6	166,60	xxxxx[1]
8,51 - 9,04	36	80,0	125	10	6	166,60	xxxxx[1]
9,05 - 9,50	36	80,0	125	10	6	166,60	xxxxx[1]
9,51 - 9,96	38	88,0	133	10	6	166,60	xxxxx[1]
9,97	38	88,0	133	10	6	166,60	09970
9,98	38	88,0	133	10	6	166,60	09980
9,99	38	88,0	133	10	6	166,60	09990
10,00	38	88,0	133	10	6	156,60	10000
10,01	38	88,0	133	10	6	166,60	10010
10,02	38	88,0	133	10	6	166,60	10020
10,03	38	88,0	133	10	6	166,60	10030
10,04	38	88,0	133	10	6	166,60	10040
10,05	38	88,0	133	10	6	166,60	10050
10,06 - 10,60	38	88,0	133	10	6	201,40	xxxxx[1]
10,61 - 11,80	41	97,0	142	10	6	201,40	xxxxx[1]
11,81 - 11,96	44	100,0	151	12	6	201,40	xxxxx[1]
11,97	44	100,0	151	12	6	201,40	11970
11,98	44	100,0	151	12	6	201,40	11980
11,99	44	100,0	151	12	6	201,40	11990
12,00	44	100,0	151	12	6	189,80	12000
12,01	44	100,0	151	12	6	201,40	12010
12,02	44	100,0	151	12	6	201,40	12020
12,03	44	100,0	151	12	6	201,40	12030
12,04	44	100,0	151	12	6	201,40	12040
12,05	44	100,0	151	12	6	201,40	12050

P	●
M	○
K	●
N	
S	○
H	○
O	

→ v_c Page 84

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 15 working days

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.05 mm → Article no. 40 431 08050)!

4

NC machine reamers, sim. DIN 8093-A

NC100 H



TiAlSiN

straight flute
PLGANG 45°
SIG 120°
Solid carbide
Through hole + blind hole

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h5 mm	PLGL mm	40 435 ... EUR U4/4R	
0,98	6	16	50	4	0,12	76,03	00980
0,99	6	16	50	4	0,12	76,03	00990
1,00	6	16	50	4	0,12	76,03	01000
1,01	6	16	50	4	0,12	76,03	01010
1,02	6	16	50	4	0,12	76,03	01020
1,03	6	16	50	4	0,12	76,03	01030
1,48	9	16	50	4	0,12	82,98	01480
1,49	9	16	50	4	0,12	82,98	01490
1,50	9	16	50	4	0,12	82,98	01500
1,51	9	16	50	4	0,12	82,98	01510
1,52	9	16	50	4	0,12	82,98	01520
1,60	10	16	50	4	0,12	82,98	01600
1,70	10	16	50	4	0,12	82,98	01700
1,80	11	16	50	4	0,12	82,98	01800
1,90	11	16	50	4	0,12	82,98	01900
1,97	12	16	50	4	0,30	82,98	01970
1,98	12	16	50	4	0,30	82,98	01980
1,99	12	16	50	4	0,30	82,98	01990
2,00	12	16	50	4	0,30	82,98	02000
2,01	12	16	50	4	0,30	82,98	02010
2,02	12	16	50	4	0,30	82,98	02020
2,03	12	16	50	4	0,30	82,98	02030
2,05	12	16	50	4	0,30	82,98	02050
2,10	12	16	50	4	0,30	82,98	02100
2,20	13	16	50	4	0,30	82,98	02200
2,30	13	16	50	4	0,30	82,98	02300
2,40	16	26	60	4	0,30	82,98	02400
2,50	16	26	60	4	0,30	82,98	02500
2,60	16	26	60	4	0,30	82,98	02600
2,70	17	30	64	4	0,30	82,98	02700
2,80	17	30	64	4	0,30	82,98	02800
2,90	17	30	64	4	0,30	82,98	02900
2,97	17	30	64	4	0,30	82,98	02970
2,98	17	30	64	4	0,30	82,98	02980
2,99	17	30	64	4	0,30	82,98	02990
3,00	17	30	64	4	0,30	82,98	03000
3,01	17	30	64	4	0,30	82,98	03010
3,02	17	30	64	4	0,30	82,98	03020
3,03	17	30	64	4	0,30	82,98	03030
3,05	18	34	68	4	0,30	82,98	03050
3,10	18	34	68	4	0,30	82,98	03100
3,20	18	34	68	4	0,30	82,98	03200
3,30	18	34	68	4	0,30	82,98	03300
3,40	20	40	74	4	0,30	82,98	03400
3,50	20	40	74	4	0,30	82,98	03500
3,60	20	40	74	4	0,30	82,98	03600
3,70	20	40	74	4	0,30	82,98	03700
3,80	21	43	77	4	0,40	82,98	03800
3,90	21	43	77	4	0,40	82,98	03900
3,97	21	43	77	4	0,40	82,98	03970
3,98	21	43	77	4	0,40	82,98	03980

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h5 mm	PLGL mm	40 435 ... EUR U4/4R	
3,99	21	43	77	4	0,40	82,98	03990
4,00	21	43	77	4	0,40	82,98	04000
4,01	21	43	77	4	0,40	82,98	04010
4,02	21	43	77	4	0,40	82,98	04020
4,03	21	43	77	4	0,40	82,98	04030
4,05	21	40	82	6	0,40	102,40	04050
4,10	21	40	82	6	0,40	102,40	04100
4,20	21	40	82	6	0,40	102,40	04200
4,30	23	40	82	6	0,40	102,40	04300
4,40	23	40	82	6	0,40	102,40	04400
4,50	23	40	82	6	0,40	102,40	04500
4,60	23	40	82	6	0,40	102,40	04600
4,70	23	40	82	6	0,40	102,40	04700
4,80	26	51	93	6	0,50	102,40	04800
4,90	26	51	93	6	0,50	102,40	04900
4,97	26	51	93	6	0,50	102,40	04970
4,98	26	51	93	6	0,50	102,40	04980
4,99	26	51	93	6	0,50	102,40	04990
5,00	26	51	93	6	0,50	102,40	05000
5,01	26	51	93	6	0,50	102,40	05010
5,02	26	51	93	6	0,50	102,40	05020
5,03	26	51	93	6	0,50	102,40	05030
5,05	26	51	93	6	0,50	102,40	05050
5,10	26	51	93	6	0,50	102,40	05100
5,20	26	51	93	6	0,50	102,40	05200
5,30	26	51	93	6	0,50	102,40	05300
5,40	26	51	93	6	0,50	102,40	05400
5,50	26	51	93	6	0,50	102,40	05500
5,60	26	51	93	6	0,50	102,40	05600
5,70	26	51	93	6	0,50	102,40	05700
5,80	26	51	93	6	0,50	102,40	05800
5,90	26	51	93	6	0,50	102,40	05900
5,97	26	51	93	6	0,50	102,40	05970
5,98	26	51	93	6	0,50	102,40	05980
5,99	26	51	93	6	0,50	102,40	05990
6,00	26	51	93	6	0,50	102,40	06000

P	○
M	○
K	○
N	
S	
H	●
O	

→ v_c Page 85

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
Intermediate dimensions available on request.

Continued on next page

NC machine reamers, sim. DIN 8093-A

NC100 H



TiAlSiN

straight flute
PLGANG 45°
SIG 120°
Solid carbide
Through hole + blind hole

40 435 ...

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h5 mm	PLGL mm	EUR U4/4R	
6,01	26	51	93	6	0,5	102,40	**06010**
6,02	26	51	93	6	0,5	102,40	**06020**
6,03	26	51	93	6	0,5	102,40	**06030**
6,05	26	59	101	8	0,5	127,80	**06050**
6,10	26	59	101	8	0,5	127,80	**06100**
6,20	26	59	101	8	0,5	127,80	**06200**
6,30	26	59	101	8	0,5	127,80	**06300**
6,40	26	59	101	8	0,5	127,80	**06400**
6,50	26	59	101	8	0,5	127,80	**06500**
6,60	26	59	101	8	0,5	127,80	**06600**
6,70	26	59	101	8	0,5	127,80	**06700**
6,80	31	67	109	8	0,6	127,80	**06800**
6,85	31	67	109	8	0,6	127,80	**06850**
6,90	31	67	109	8	0,6	127,80	**06900**
7,00	31	67	109	8	0,6	127,80	**07000**
7,10	31	67	109	8	0,6	127,80	**07100**
7,20	31	67	109	8	0,6	127,80	**07200**
7,30	31	67	109	8	0,6	127,80	**07300**
7,40	31	67	109	8	0,6	127,80	**07400**
7,50	31	67	109	8	0,6	127,80	**07500**
7,60	31	67	109	8	0,6	127,80	**07600**
7,70	33	75	117	8	0,6	127,80	**07700**
7,80	33	75	117	8	0,6	127,80	**07800**
7,90	33	75	117	8	0,6	127,80	**07900**
7,97	33	75	117	8	0,6	127,80	**07970**
7,98	33	75	117	8	0,6	127,80	**07980**
7,99	33	75	117	8	0,6	127,80	**07990**
8,00	33	75	117	8	0,6	127,80	**08000**
8,01	33	75	117	8	0,7	127,80	**08010**
8,02	33	75	117	8	0,7	127,80	**08020**
8,03	33	75	117	8	0,7	127,80	**08030**
8,05	33	71	117	10	0,7	156,50	**08050**
8,10	33	71	117	10	0,7	156,50	**08100**
8,20	33	71	117	10	0,7	156,50	**08200**
8,30	33	71	117	10	0,7	156,50	**08300**
8,40	33	71	117	10	0,7	156,50	**08400**
8,50	33	71	117	10	0,7	156,50	**08500**
8,60	33	71	117	10	0,7	156,50	**08600**
8,70	36	79	125	10	0,7	156,50	**08700**
8,80	36	79	125	10	0,7	156,50	**08800**
8,90	36	79	125	10	0,7	156,50	**08900**
9,00	36	79	125	10	0,7	156,50	**09000**
9,10	36	79	125	10	0,7	156,50	**09100**
9,20	36	79	125	10	0,7	156,50	**09200**
9,30	36	79	125	10	0,7	156,50	**09300**
9,40	36	79	125	10	0,7	156,50	**09400**
9,50	36	79	125	10	0,7	156,50	**09500**
9,60	36	79	125	10	0,7	156,50	**09600**
9,70	38	87	133	10	0,7	156,50	**09700**
9,80	38	87	133	10	0,7	156,50	**09800**
9,90	38	87	133	10	0,7	156,50	**09900**

40 435 ...

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h5 mm	PLGL mm	EUR U4/4R	
9,97	41	87	133	10	0,7	156,50	**09970**
9,98	41	87	133	10	0,7	156,50	**09980**
9,99	41	87	133	10	0,7	156,50	**09990**
10,00	41	87	133	10	0,7	156,50	**10000**
10,01	41	87	133	10	0,7	156,50	**10010**
10,02	41	87	133	10	0,8	156,50	**10020**
10,03	41	87	133	10	0,8	156,50	**10030**
10,04	41	87	133	10	0,8	156,50	**10040**
10,05	41	87	133	10	0,8	156,50	**10050**
11,17	44	99	150	12	0,8	204,90	**11170**
11,97	44	99	150	12	0,8	204,90	**11970**
11,98	44	99	150	12	0,8	204,90	**11980**
11,99	44	99	150	12	0,8	204,90	**11990**
12,00	44	99	150	12	0,8	204,90	**12000**
12,01	44	99	150	12	0,8	204,90	**12010**
12,02	44	99	150	12	0,8	204,90	**12020**
12,03	44	99	150	12	0,8	204,90	**12030**
12,04	44	99	150	12	0,8	204,90	**12040**
12,05	44	99	150	12	0,8	204,90	**12050**

P	○
M	○
K	○
N	
S	
H	●
O	

→ v_c Page 85

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
Intermediate dimensions available on request.

4

Machine reamers, similar to DIN 8093-A / -B

▲ extremely irregular pitch

N



NEW

Left Hand Helix
PLGANG 45°
Solid carbide
Through hole

NEW

straight flute
PLGANG 45°
Solid carbide
Blind hole

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h7 mm	ZEFP	40 415 ... EUR U4/4R		40 405 ... EUR U4/4R	
2,0	11	31	49	2,0	4	29,55	02000	29,55	02000
2,1	11	31	49	2,0	4	35,32	02100	35,32	02100
2,2	12	35	53	2,2	4	35,32	02200	35,32	02200
2,3	12	35	53	2,2	4	35,32	02300	35,32	02300
2,4	14	34	57	2,5	4	35,32	02400	35,32	02400
2,5	14	34	57	2,5	4	31,74	02500	31,74	02500
2,6	14	34	57	2,5	4	37,96	02600	37,96	02600
2,7	15	36	61	3,0	4	37,96	02700	37,96	02700
2,8	15	36	61	3,0	4	37,96	02800	37,96	02800
2,9	15	36	61	3,0	4	37,96	02900	37,96	02900
3,0	15	36	61	3,0	4	34,20	03000	34,20	03000
3,1	15	36	61	3,0	4	40,99	03100	40,99	03100
3,2	18	40	70	3,5	4	40,99	03200	40,99	03200
3,3	18	40	70	3,5	4	40,99	03300	40,99	03300
3,4	18	40	70	3,5	4	40,99	03400	40,99	03400
3,5	18	40	70	3,5	4	38,97	03500	38,97	03500
3,6	18	40	70	3,5	4	46,80	03600	46,80	03600
3,7	18	40	70	3,5	4	46,80	03700	46,80	03700
3,8	19	43	75	4,0	4	46,80	03800	46,80	03800
3,9	19	43	75	4,0	4	46,80	03900	46,80	03900
4,0	19	43	75	4,0	4	41,87	04000	41,87	04000
4,1	19	43	75	4,0	4	50,42	04100	50,42	04100
4,2	19	43	75	4,0	4	50,42	04200	50,42	04200
4,3	21	42	75	4,5	4	50,42	04300	50,42	04300
4,4	21	42	75	4,5	4	50,42	04400	50,42	04400
4,5	21	42	75	4,5	4	45,64	04500	45,64	04500
4,6	21	42	75	4,5	4	54,75	04600	54,75	04600
4,7	21	42	75	4,5	4	54,75	04700	54,75	04700
4,8	23	52	86	5,0	6	54,75	04800	54,75	04800
4,9	23	52	86	5,0	6	54,75	04900	54,75	04900
5,0	23	52	86	5,0	6	51,42	05000	51,42	05000
5,1	23	52	86	5,0	6	59,25	05100	59,25	05100
5,2	23	52	86	5,0	6	59,25	05200	59,25	05200
5,3	23	52	86	5,0	6	59,25	05300	59,25	05300
5,4	26	57	93	5,6	6	59,25	05400	59,25	05400
5,5	26	57	93	5,6	6	54,45	05500	54,45	05500
5,6	26	57	93	5,6	6	62,72	05600	62,72	05600
5,7	26	57	93	5,6	6	62,72	05700	62,72	05700
5,8	26	57	93	5,6	6	62,72	05800	62,72	05800
5,9	26	57	93	5,6	6	62,72	05900	62,72	05900
6,0	26	57	93	5,6	6	65,18	06000	65,18	06000
6,1	26	57	93	5,6	6	75,03	06100	75,03	06100
6,2	26	57	93	5,6	6	75,03	06200	75,03	06200
6,3	28	63	101	6,3	6	75,03	06300	75,03	06300
6,4	28	63	101	6,3	6	75,03	06400	75,03	06400
6,5	28	63	101	6,3	6	73,02	06500	73,02	06500
6,6	28	63	101	6,3	6	84,15	06600	84,15	06600
6,7	28	63	101	6,3	6	84,15	06700	84,15	06700
6,8	31	69	109	7,1	6	84,15	06800	84,15	06800
6,9	31	69	109	7,1	6	84,15	06900	84,15	06900
7,0	31	69	109	7,1	6	81,69	07000	81,69	07000
7,1	31	69	109	7,1	6	93,86	07100	93,86	07100
7,2	31	69	109	7,1	6	93,86	07200	93,86	07200
7,3	31	69	109	7,1	6	93,86	07300	93,86	07300
7,4	31	69	109	7,1	6	93,86	07400	93,86	07400
7,5	31	69	109	7,1	6	88,37	07500	88,37	07500
7,6	33	75	117	8,0	6	101,70	07600	101,70	07600
7,7	33	75	117	8,0	6	101,70	07700	101,70	07700
7,8	33	75	117	8,0	6	101,70	07800	101,70	07800
7,9	33	75	117	8,0	6	101,70	07900	101,70	07900
8,0	33	75	117	8,0	6	93,86	08000	93,86	08000
8,1	33	75	117	8,0	6	103,40	08100	103,40	08100
8,2	33	75	117	8,0	6	103,40	08200	103,40	08200
8,3	33	75	117	8,0	6	103,40	08300	103,40	08300
8,4	33	75	117	8,0	6	103,40	08400	103,40	08400
8,5	33	75	117	8,0	6	102,00	08500	102,00	08500
8,6	36	81	125	9,0	6	112,00	08600	112,00	08600
8,7	36	81	125	9,0	6	112,00	08700	112,00	08700
8,8	36	81	125	9,0	6	112,00	08800	112,00	08800
8,9	36	81	125	9,0	6	112,00	08900	112,00	08900
9,0	36	81	125	9,0	6	109,20	09000	109,20	09000
9,1	36	81	125	9,0	6	120,10	09100	120,10	09100
9,2	36	81	125	9,0	6	120,10	09200	120,10	09200
9,3	36	81	125	9,0	6	120,10	09300	120,10	09300
9,4	36	81	125	9,0	6	120,10	09400	120,10	09400
9,5	36	81	125	9,0	6	117,00	09500	117,00	09500
9,6	38	87	133	10,0	6	128,80	09600	128,80	09600
9,7	38	87	133	10,0	6	128,80	09700	128,80	09700
9,8	38	87	133	10,0	6	128,80	09800	128,80	09800
9,9	38	87	133	10,0	6	128,80	09900	128,80	09900
10,0	38	87	133	10,0	6	126,00	10000	126,00	10000
10,1	38	87	133	10,0	6	138,80	10100	138,80	10100
10,2	38	87	133	10,0	6	138,80	10200	138,80	10200
10,3	38	87	133	10,0	6	138,80	10300	138,80	10300
10,4	38	87	133	10,0	6	138,80	10400	138,80	10400
10,5	38	87	133	10,0	6	131,90	10500	131,90	10500
10,6	38	87	133	10,0	6	144,80	10600	144,80	10600
10,7	41	96	142	10,0	6	144,80	10700	144,80	10700
10,8	41	96	142	10,0	6	144,80	10800	144,80	10800
10,9	41	96	142	10,0	6	144,80	10900	144,80	10900
11,0	41	96	142	10,0	6	142,70	11000	142,70	11000
11,1	41	96	142	10,0	6	157,80	11100	157,80	11100
11,2	41	96	142	10,0	6	157,80	11200	157,80	11200
11,3	41	96	142	10,0	6	157,80	11300	157,80	11300
11,4	41	96	142	10,0	6	157,80	11400	157,80	11400
11,5	41	96	142	10,0	6	152,20	11500	152,20	11500
11,6	41	96	142	10,0	6	166,60	11600	166,60	11600
11,7	41	96	142	10,0	6	166,60	11700	166,60	11700
11,8	41	96	142	10,0	6	166,60	11800	166,60	11800
11,9	44	100	151	10,0	6	166,60	11900	166,60	11900
12,0	44	100	151	10,0	6	163,70	12000	163,70	12000

	40 415 ...	40 405 ...
P	●	●
M		
K	○	○
N	●	●
S		
H		
O		

→ v_c Page 86

NC machine reamers, DIN 212-3-B

▲ maximum radial run-out accuracy
▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC



Left Hand Helix
HSS-E
Through hole

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	40 110 ... EUR U2	
1,5	8	15,5	40	2	3	13,32	015
1,6	9	16,0	43	2	3	14,90	016
1,7	9	16,0	43	2	3	14,90	017
1,8	10	19,0	46	2	4	14,90	018
1,9	10	19,0	46	2	4	14,90	019
2,0	11	21,0	49	2	4	12,95	020
2,1	11	21,0	49	2	4	15,57	021
2,2	12	22,0	53	3	4	15,57	022
2,3	12	22,0	53	3	4	15,57	023
2,4	14	26,0	57	3	4	15,57	024
2,5	14	26,0	57	3	4	12,95	025
2,6	14	26,0	57	3	4	16,39	026
2,7	15	30,0	61	3	6	16,39	027
2,8	15	30,0	61	3	6	16,39	028
2,9	15	30,0	61	3	6	16,39	029
3,0	15	30,0	61	3	6	11,84	030
3,1	16	34,0	65	4	6	15,57	031
3,2	16	34,0	65	4	6	15,57	032
3,3	16	34,0	65	4	6	15,57	033
3,4	18	39,0	70	4	6	15,57	034
3,5	18	39,0	70	4	6	13,92	035
3,6	18	39,0	70	4	6	17,35	036
3,7	18	39,0	70	4	6	17,35	037
3,8	19	44,0	75	4	6	17,35	038
3,9	19	44,0	75	4	6	12,58	039
4,0	19	44,0	75	4	6	12,95	040
4,1	19	44,0	75	4	6	16,28	041
4,2	19	44,0	75	4	6	16,28	042
4,3	21	48,0	80	5	6	16,28	043
4,4	21	48,0	80	5	6	16,28	044
4,5	21	48,0	80	5	6	13,92	045
4,6	21	48,0	80	5	6	17,49	046
4,7	21	48,0	80	5	6	17,49	047
4,8	23	54,0	86	5	6	17,49	048
4,9	23	54,0	86	5	6	17,49	049
5,0	23	54,0	86	5	6	13,32	050
5,1	23	54,0	86	5	6	17,49	051
5,2	23	54,0	86	5	6	17,49	052
5,3	23	54,0	86	5	6	17,49	053
5,4	26	53,0	93	6	6	17,49	054
5,5	26	53,0	93	6	6	16,28	055
5,6	26	53,0	93	6	6	17,49	056
5,7	26	53,0	93	6	6	17,49	057
5,8	26	53,0	93	6	6	17,49	058
5,9	26	53,0	93	6	6	17,49	059
6,0	26	53,0	93	6	6	14,34	060
6,1	28	61,0	101	6	6	17,49	061
6,2	28	61,0	101	6	6	17,49	062
6,3	28	61,0	101	6	6	17,49	063
6,4	28	61,0	101	6	6	17,49	064
6,5	28	61,0	101	6	6	16,95	065
6,6	28	61,0	101	6	6	17,49	066
6,7	28	61,0	101	6	6	17,49	067
6,8	31	69,0	109	8	6	17,49	068
6,9	31	69,0	109	8	6	17,49	069
7,0	31	69,0	109	8	6	16,95	070
7,1	31	69,0	109	8	6	19,80	071
7,2	31	69,0	109	8	6	19,80	072
7,3	31	69,0	109	8	6	19,80	073
7,4	31	69,0	109	8	6	19,80	074
7,5	31	69,0	109	8	6	19,53	075
7,6	33	77,0	117	8	6	20,76	076
7,7	33	77,0	117	8	6	20,76	077
7,8	33	77,0	117	8	6	20,76	078
7,9	33	77,0	117	8	6	20,76	079
8,0	33	77,0	117	8	6	17,49	080
8,1	33	77,0	117	8	6	24,03	081
8,2	33	77,0	117	8	6	24,03	082
8,3	33	77,0	117	8	6	24,03	083
8,4	33	77,0	117	8	6	24,03	084
8,5	33	77,0	117	8	6	22,26	085
8,6	36	81,0	125	10	6	22,52	086
8,7	36	81,0	125	10	6	22,52	087
8,8	36	81,0	125	10	6	22,52	088
8,9	36	81,0	125	10	6	22,52	089
9,0	36	81,0	125	10	6	20,35	090
9,1	36	81,0	125	10	6	23,36	091
9,2	36	81,0	125	10	6	23,36	092
9,3	36	81,0	125	10	6	23,36	093
9,4	36	81,0	125	10	6	23,36	094
9,5	36	81,0	125	10	6	22,69	095
9,6	38	89,0	133	10	6	23,76	096
9,7	38	89,0	133	10	6	23,76	097
9,8	38	89,0	133	10	6	23,76	098
9,9	38	89,0	133	10	6	23,76	099
10,0	38	89,0	133	10	6	20,76	100
11,0	41	98,0	142	10	6	29,10	110
12,0	44	106,0	151	10	6	30,33	120
13,0	44	106,0	151	10	6	33,76	130
14,0	47	110,0	160	14	8	34,98	140
15,0	50	112,0	162	14	8	35,79	150
16,0	52	120,0	170	14	8	37,17	160
17,0	54	125,0	175	14	8	44,39	170
18,0	56	132,0	182	14	8	45,63	180
19,0	58	136,0	189	16	8	53,01	190
20,0	60	142,0	195	16	8	50,98	200

P	●
M	
K	●
N	●
S	
H	
O	●

→ v_c Page 87

4

NC machine reamers, DIN 212-3-B

▲ 0.01 mm steps
▲ tolerance: Ø 1.00 – Ø 5.50 mm = +0.004 mm
▲ tolerance: Ø 5.51 – Ø 12.00 mm = +0.005 mm
▲ PLGANG ≤ Ø 3,75 = 30° / > Ø 3,75 = 45°

NC 100



Left Hand Helix
HSS-E
Through hole

DC mm	L mm	LU mm	OAL mm	DCONMS h6 mm	ZEFP	40 115 ... EUR U2	
0,95 - 0,99	5,5	12,5	34	1	3	20,50	xxxxx[1]
1,00	5,5	12,5	34	1	3	19,53	01000
1,01	5,5	12,5	34	1	3	19,53	01010
1,02	5,5	12,5	34	1	3	19,53	01020
1,03 - 1,06	5,5	12,5	34	1	3	20,50	xxxxx[1]
1,07 - 1,18	6,5	13,0	36	1	3	20,50	xxxxx[1]
1,19 - 1,32	7,5	14,0	38	2	3	20,50	xxxxx[1]
1,33 - 1,41	8,0	15,5	40	2	3	20,50	xxxxx[1]
1,42 - 1,49	8,0	15,5	40	2	3	20,50	xxxxx[1]
1,50	8,0	15,5	40	2	3	16,95	01500
1,51	9,0	16,0	43	2	3	16,95	01510
1,52	9,0	16,0	43	2	3	16,95	01520
1,53 - 1,70	9,0	16,0	43	2	3	20,50	xxxxx[1]
1,71 - 1,90	10,0	19,0	46	2	4	20,50	xxxxx[1]
1,91 - 1,96	11,0	21,0	49	2	4	20,50	xxxxx[1]
1,97	11,0	21,0	49	2	4	16,95	01970
1,98	11,0	21,0	49	2	4	16,95	01980
1,99	11,0	21,0	49	2	4	16,95	01990
2,00	11,0	21,0	49	2	4	15,04	02000
2,01	11,0	21,0	49	2	4	15,04	02010
2,02	11,0	21,0	49	2	4	15,04	02020
2,03 - 2,12	11,0	21,0	49	2	4	20,50	xxxxx[1]
2,13 - 2,36	12,0	22,0	53	3	4	20,50	xxxxx[1]
2,37 - 2,47	14,0	26,0	57	3	4	20,50	xxxxx[1]
2,48	14,0	26,0	57	3	4	17,21	02480
2,49	14,0	26,0	57	3	4	17,21	02490
2,50	14,0	26,0	57	3	4	14,62	02500
2,51	14,0	26,0	57	3	4	14,62	02510
2,52	14,0	26,0	57	3	4	14,62	02520
2,53 - 2,65	14,0	26,0	57	3	4	20,50	xxxxx[1]
2,66 - 2,96	15,0	30,0	61	3	6	20,50	xxxxx[1]
2,97	15,0	30,0	61	3	6	17,63	02970
2,98	15,0	30,0	61	3	6	17,63	02980
2,99	15,0	30,0	61	3	6	17,63	02990
3,00	15,0	30,0	61	3	6	13,08	03000
3,01	15,0	30,0	61	3	6	13,08	03010
3,02	15,0	30,0	61	3	6	13,08	03020
3,03	15,0	30,0	61	3	6	20,50	03030[1]
3,04 - 3,35	16,0	34,0	65	4	6	20,50	xxxxx[1]
3,36 - 3,75	18,0	39,0	70	4	6	20,50	xxxxx[1]
3,76 - 3,96	19,0	44,0	75	4	6	20,50	xxxxx[1]
3,97	19,0	44,0	75	4	6	14,34	03970
3,98	19,0	44,0	75	4	6	14,34	03980
3,99	19,0	44,0	75	4	6	14,34	03990
4,00	19,0	44,0	75	4	6	14,34	04000
4,01	19,0	44,0	75	4	6	14,34	04010
4,02	19,0	44,0	75	4	6	14,34	04020
4,03 - 4,25	19,0	44,0	75	4	6	20,50	xxxxx[1]
4,26 - 4,75	21,0	48,0	80	5	6	20,50	xxxxx[1]
4,76 - 4,96	23,0	54,0	86	5	6	20,50	xxxxx[1]
4,97	23,0	54,0	86	5	6	15,57	04970
4,98	23,0	54,0	86	5	6	15,57	04980
4,99	23,0	54,0	86	5	6	15,57	04990
5,00	23,0	54,0	86	5	6	15,57	05000
5,01	23,0	54,0	86	5	6	15,57	05010
5,02	23,0	54,0	86	5	6	15,57	05020
5,03 - 5,30	23,0	54,0	86	5	6	20,50	xxxxx[1]
5,31 - 5,60	26,0	53,0	93	6	6	20,50	xxxxx[1]
5,61 - 5,96	26,0	53,0	93	6	6	20,50	xxxxx[1]
5,97	26,0	53,0	93	6	6	17,21	05970
5,98	26,0	53,0	93	6	6	17,21	05980
5,99	26,0	53,0	93	6	6	17,21	05990
6,00	26,0	53,0	93	6	6	17,21	06000
6,01	26,0	53,0	93	6	6	17,21	06010
6,02	26,0	53,0	93	6	6	17,21	06020
6,03	26,0	53,0	93	6	6	20,50	06030[1]
6,04 - 6,70	28,0	61,0	101	6	6	20,50	xxxxx[1]
6,71 - 7,20	31,0	69,0	109	8	6	20,50	xxxxx[1]
7,21 - 7,50	31,0	69,0	109	8	6	20,50	xxxxx[1]
7,51 - 7,96	33,0	77,0	117	8	6	27,33	xxxxx[1]
7,97	33,0	77,0	117	8	6	18,46	07970
7,98	33,0	77,0	117	8	6	18,46	07980
7,99	33,0	77,0	117	8	6	18,46	07990
8,00	33,0	77,0	117	8	6	18,46	08000
8,01	33,0	77,0	117	8	6	18,46	08010
8,02	33,0	77,0	117	8	6	18,46	08020
8,03 - 8,20	33,0	77,0	117	8	6	27,33	xxxxx[1]
8,21 - 8,50	33,0	77,0	117	8	6	27,33	xxxxx[1]
8,51 - 8,99	36,0	81,0	125	10	6	27,33	xxxxx[1]
9,00	36,0	81,0	125	10	6	23,51	09000
9,01	36,0	81,0	125	10	6	23,51	09010
9,02	36,0	81,0	125	10	6	23,51	09020
9,03 - 9,20	36,0	81,0	125	10	6	27,33	xxxxx[1]
9,21 - 9,50	36,0	81,0	125	10	6	27,33	xxxxx[1]
9,51 - 9,96	38,0	89,0	133	10	6	40,72	xxxxx[1]
9,97	38,0	89,0	133	10	6	23,51	09970
9,98	38,0	89,0	133	10	6	23,51	09980
9,99	38,0	89,0	133	10	6	23,51	09990
10,00	38,0	89,0	133	10	6	23,51	10000
10,01	38,0	89,0	133	10	6	23,51	10010
10,02	38,0	89,0	133	10	6	23,51	10020
10,03 - 10,20	38,0	89,0	133	10	6	40,72	xxxxx[1]
10,21 - 10,60	38,0	89,0	133	10	6	40,72	xxxxx[1]
10,61 - 11,20	41,0	98,0	142	10	6	40,72	xxxxx[1]
11,21 - 11,80	41,0	98,0	142	10	6	40,72	xxxxx[1]
11,81 - 11,96	44,0	106,0	151	10	6	40,72	xxxxx[1]
11,97	44,0	106,0	151	10	6	33,76	11970
11,98	44,0	106,0	151	10	6	33,76	11980
11,99	44,0	106,0	151	10	6	33,76	11990
12,00	44,0	106,0	151	10	6	33,76	12000

P	●
M	
K	●
N	●
S	
H	
O	●

→ v_c Page 87

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 10 working days / Minimum order 5 pieces

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 8.03 mm → Article no. 40 115 08030)!

Machine reamers, DIN 212-B

N



4

Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 150 ...

DC H7 mm	L mm	LU mm	OAL mm	DCONMS h9 mm	ZEFP	EUR U2	
1,0	5,5	13	34	1,0	3	23,22	**010**
1,5	8,0	16	40	1,5	3	19,27	**015**
2,0	11,0	22	49	2,0	4	18,85	**020**
2,5	14,0	26	57	2,5	4	18,85	**025**
3,0	15,0	29	61	3,0	6	16,80	**030**
3,5	18,0	38	70	3,5	6	19,68	**035**
4,0	19,0	46	75	4,0	6	18,85	**040**
4,5	21,0	51	80	4,5	6	19,68	**045**
5,0	23,0	57	86	5,0	6	19,27	**050**
5,5	26,0	56	93	5,6	6	23,22	**055**
6,0	26,0	56	93	5,6	6	20,09	**060**
6,5	28,0	64	101	6,3	6	24,45	**065**
7,0	31,0	72	109	7,1	6	24,45	**070**
7,5	31,0	72	109	7,1	6	27,33	**075**
8,0	33,0	80	117	8,0	6	25,27	**080**
8,5	33,0	80	117	8,0	6	31,84	**085**
9,0	36,0	84	125	9,0	6	29,10	**090**
9,5	36,0	84	125	9,0	6	32,52	**095**
10,0	38,0	92	133	10,0	6	29,64	**100**
11,0	41,0	101	142	10,0	6	41,80	**110**
12,0	44,0	110	151	10,0	6	43,60	**120**
13,0	44,0	110	151	10,0	6	48,64	**130**
14,0	47,0	114	160	12,5	8	50,28	**140**
15,0	50,0	116	162	12,5	8	52,05	**150**
16,0	52,0	124	170	12,5	8	53,70	**160**
17,0	54,0	129	175	14,0	8	63,54	**170**
18,0	56,0	136	182	14,0	8	65,17	**180**
19,0	58,0	140	189	16,0	8	76,38	**190**
20,0	60,0	146	195	16,0	8	72,82	**200**

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

All other diameters, tolerance classes and chamfers also available on request.

Machine reamers, DIN 212-B

▲ 0.01 mm steps
▲ tolerance: Ø 0.95 – 5.50 mm = +0.004 mm
▲ tolerance: Ø 5.51 – 12.00 mm = +0.005 mm

N 100



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS h9 mm	ZEFP	EUR U2	
0,95 - 1,06	5,5	13	34	1,0	3	26,38	xxxxx[1]
1,07 - 1,18	6,5	14	36	1,1	3	26,38	xxxxx[1]
1,19 - 1,32	7,5	15	38	1,2	3	26,38	xxxxx[1]
1,33 - 1,41	8,0	16	40	1,4	3	26,38	xxxxx[1]
1,42 - 1,47	8,0	16	40	1,5	3	24,34	xxxxx[1]
1,48	8,0	16	40	1,5	3	24,34	01480
1,49	8,0	16	40	1,5	3	24,34	01490
1,50	8,0	16	40	1,5	3	24,34	01500
1,51 - 1,70	9,0	18	43	1,6	3	23,10	xxxxx[1]
1,71 - 1,90	10,0	20	46	1,8	4	23,10	xxxxx[1]
1,91 - 1,97	11,0	22	49	2,0	4	23,10	xxxxx[1]
1,98	11,0	22	49	2,0	4	23,10	01980
1,99	11,0	22	49	2,0	4	23,10	01990
2,00	11,0	22	49	2,0	4	21,17	02000
2,01	11,0	22	49	2,0	4	21,17	02010
2,02	11,0	22	49	2,0	4	21,17	02020
2,03	11,0	22	49	2,0	4	21,17	02030
2,04	11,0	22	49	2,0	4	21,17	02040
2,05	11,0	22	49	2,0	4	21,17	02050
2,06 - 2,09	11,0	22	49	2,0	4	21,17	xxxxx[1]
2,10 - 2,12	11,0	22	49	2,0	4	24,59	xxxxx[1]
2,13 - 2,36	12,0	24	53	2,2	4	24,59	xxxxx[1]
2,37 - 2,49	14,0	26	57	2,5	4	24,59	xxxxx[1]
2,50 - 2,59	14,0	26	57	2,5	4	20,91	xxxxx[1]
2,60 - 2,65	14,0	26	57	2,5	4	25,69	xxxxx[1]
2,66 - 2,80	15,0	30	61	2,8	6	25,69	xxxxx[1]
2,81 - 2,94	15,0	29	61	3,0	6	25,69	xxxxx[1]
2,95	15,0	29	61	3,0	6	25,69	02950[1]
2,96	15,0	29	61	3,0	6	25,69	02960[1]
2,97	15,0	29	61	3,0	6	25,69	02970
2,98	15,0	29	61	3,0	6	25,69	02980
2,99	15,0	29	61	3,0	6	25,69	02990
3,00	15,0	29	61	3,0	6	25,69	03000
3,01	16,0	33	65	3,2	6	19,27	03010
3,02	16,0	33	65	3,2	6	19,27	03020
3,03	16,0	33	65	3,2	6	19,27	03030
3,04	16,0	33	65	3,2	6	19,27	03040
3,05	16,0	33	65	3,2	6	19,27	03050
3,06	16,0	33	65	3,2	6	19,27	03060
3,07	16,0	33	65	3,2	6	19,27	03070
3,08 - 3,09	16,0	33	65	3,2	6	19,27	xxxxx[1]
3,10 - 3,35	16,0	33	65	3,2	6	24,34	xxxxx[1]
3,36 - 3,49	18,0	38	70	3,5	6	24,34	xxxxx[1]
3,50 - 3,59	18,0	38	70	3,5	6	20,91	xxxxx[1]
3,60 - 3,75	18,0	38	70	3,5	6	26,91	xxxxx[1]
3,76 - 3,81	19,0	46	75	4,0	6	26,91	xxxxx[1]
3,82 - 3,94	19,0	46	75	4,0	6	20,35	xxxxx[1]
3,95	19,0	46	75	4,0	6	20,35	03950[1]
3,96	19,0	46	75	4,0	6	20,35	03960[1]
3,97	19,0	46	75	4,0	6	20,35	03970

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS h9 mm	ZEFP	EUR U2	
3,98	19,0	46	75	4,0	6	20,35	03980
3,99	19,0	46	75	4,0	6	20,35	03990
4,00	19,0	46	75	4,0	6	20,35	04000
4,01	19,0	46	75	4,0	6	20,35	04010
4,02	19,0	46	75	4,0	6	20,35	04020
4,03	19,0	46	75	4,0	6	20,35	04030
4,04	19,0	46	75	4,0	6	20,35	04040
4,05	19,0	46	75	4,0	6	20,35	04050
4,06	19,0	46	75	4,0	6	20,35	04060
4,07	19,0	46	75	4,0	6	20,35	04070
4,08	19,0	46	75	4,0	6	20,35	04080
4,09 - 4,20	19,0	46	75	4,0	6	20,35	xxxxx[1]
4,21 - 4,25	19,0	46	75	4,0	6	25,27	xxxxx[1]
4,26 - 4,75	21,0	51	80	4,5	6	25,27	xxxxx[1]
4,76 - 4,95	23,0	57	86	5,0	6	22,52	xxxxx[1]
4,96	23,0	57	86	5,0	6	22,52	04960[1]
4,97	23,0	57	86	5,0	6	22,52	04970
4,98	23,0	57	86	5,0	6	22,52	04980
4,99	23,0	57	86	5,0	6	22,52	04990
5,00	23,0	57	86	5,0	6	22,52	05000
5,01	23,0	57	86	5,0	6	22,52	05010
5,02	23,0	57	86	5,0	6	22,52	05020
5,03	23,0	57	86	5,0	6	22,52	05030
5,04	23,0	57	86	5,0	6	22,52	05040
5,05	23,0	57	86	5,0	6	22,52	05050
5,06	23,0	57	86	5,0	6	22,52	05060
5,07	23,0	57	86	5,0	6	22,52	05070
5,08 - 5,20	23,0	57	86	5,0	6	22,52	xxxxx[1]
5,21 - 5,30	23,0	57	86	5,0	6	24,59	xxxxx[1]
5,31 - 5,94	26,0	56	93	5,6	6	24,59	xxxxx[1]
5,95	26,0	56	93	5,6	6	24,59	05950[1]
5,96	26,0	56	93	5,6	6	24,59	05960[1]
5,97	26,0	56	93	5,6	6	24,59	05970
5,98	26,0	56	93	5,6	6	24,59	05980
5,99	26,0	56	93	5,6	6	24,59	05990

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 16 working days

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 10.06 mm → Article no. 40 140 10060)!

All other diameters, tolerance classes and chamfers also available on request.

Continued on next page

Machine reamers, DIN 212-B

▲ 0.01 mm steps
▲ tolerance: Ø 0.95 – 5.50 mm = +0.004 mm
▲ tolerance: Ø 5.51 – 12.00 mm = +0.005 mm

N 100



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS h9 mm	ZEFP	EUR U2	
6,00	26	56	93	5,6	6	24,59	06000
6,01	28	64	101	6,3	6	26,91	06010
6,02	28	64	101	6,3	6	26,91	06020
6,03	28	64	101	6,3	6	26,91	06030
6,04	28	64	101	6,3	6	26,91	06040
6,05	28	64	101	6,3	6	26,91	06050
6,06 - 6,11	28	64	101	6,3	6	26,91	xxxxx[1]
6,12 - 6,34	28	64	101	6,3	6	26,91	xxxxx[1]
6,35	28	64	101	6,3	6	26,91	06350
6,36 - 6,70	28	64	101	6,3	6	26,91	xxxxx[1]
6,71 - 6,94	31	72	109	7,1	6	26,91	xxxxx[1]
6,95	31	72	109	7,1	6	26,91	06950[1]
6,96	31	72	109	7,1	6	26,91	06960[1]
6,97	31	72	109	7,1	6	26,91	06970[1]
6,98	31	72	109	7,1	6	26,91	06980[1]
6,99	31	72	109	7,1	6	26,91	06990[1]
7,00	31	72	109	7,1	6	26,91	07000[1]
7,01	31	72	109	7,1	6	26,91	07010[1]
7,02	31	72	109	7,1	6	26,91	07020[1]
7,03	31	72	109	7,1	6	26,91	07030[1]
7,04 - 7,50	31	72	109	7,1	6	26,91	xxxxx[1]
7,51 - 7,94	33	80	117	8,0	6	26,91	xxxxx[1]
7,95	33	80	117	8,0	6	26,91	07950[1]
7,96	33	80	117	8,0	6	26,91	07960[1]
7,97	33	80	117	8,0	6	26,91	07970
7,98	33	80	117	8,0	6	26,91	07980
7,99	33	80	117	8,0	6	26,91	07990
8,00	33	80	117	8,0	6	26,91	08000
8,01	33	80	117	8,0	6	26,91	08010
8,02	33	80	117	8,0	6	26,91	08020
8,03	33	80	117	8,0	6	26,91	08030
8,04	33	80	117	8,0	6	26,91	08040
8,05	33	80	117	8,0	6	26,91	08050
8,06 - 8,20	33	80	117	8,0	6	26,91	xxxxx[1]
8,21 - 8,50	33	80	117	8,0	6	33,88	xxxxx[1]
8,51 - 8,63	36	84	125	9,0	6	33,88	xxxxx[1]
8,64 - 8,95	36	84	125	9,0	6	33,88	xxxxx[1]
8,96	36	84	125	9,0	6	33,88	08960[1]
8,97	36	84	125	9,0	6	33,88	08970[1]
8,98	36	84	125	9,0	6	33,88	08980[1]
8,99	36	84	125	9,0	6	33,88	08990[1]
9,00	36	84	125	9,0	6	33,88	09000[1]
9,01	36	84	125	9,0	6	33,88	09010[1]
9,02	36	84	125	9,0	6	33,88	09020[1]
9,03 - 9,50	36	84	125	9,0	6	33,88	xxxxx[1]
9,51 - 9,63	38	92	133	10,0	6	33,88	xxxxx[1]
9,64 - 9,95	38	92	133	10,0	6	33,88	xxxxx[1]
9,96	38	92	133	10,0	6	33,88	09960[1]
9,97	38	92	133	10,0	6	33,88	09970
9,98	38	92	133	10,0	6	33,88	09980

40 140 ...

DC mm	L mm	LU mm	OAL mm	DCONMS h9 mm	ZEFP	EUR U2	
9,99	38	92	133	10,0	6	33,88	09990
10,00	38	92	133	10,0	6	33,88	10000
10,01	38	92	133	10,0	6	33,88	10010
10,02	38	92	133	10,0	6	33,88	10020
10,03	38	92	133	10,0	6	33,88	10030
10,04	38	92	133	10,0	6	33,88	10040
10,05	38	92	133	10,0	6	33,88	10050
10,06 - 10,09	38	92	133	10,0	6	33,88	xxxxx[1]
10,10	38	92	133	10,0	6	33,88	10100
10,11 - 10,19	38	92	133	10,0	6	33,88	xxxxx[1]
10,20	38	92	133	10,0	6	33,88	10200
10,21 - 10,60	38	92	133	10,0	6	42,49	xxxxx[1]
10,61 - 11,20	41	101	142	10,0	6	42,49	xxxxx[1]
11,21 - 11,80	41	101	142	10,0	6	48,51	xxxxx[1]
11,81 - 11,95	44	110	151	10,0	6	48,51	xxxxx[1]
11,96	44	110	151	10,0	6	48,51	11960[1]
11,97	44	110	151	10,0	6	48,51	11970
11,98	44	110	151	10,0	6	48,51	11980
11,99	44	110	151	10,0	6	48,51	11990
12,00	44	110	151	10,0	6	48,51	12000
12,01 - 12,05	44	110	151	10,0	6	48,51	xxxxx[1]

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 16 working days

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 10.06 mm → Article no. 40 140 10060)!

All other diameters, tolerance classes and chamfers also available on request.

Stub reamers, DIN 8089-B

AR



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 145 ...

DC $_{H7}$ mm	L mm	OAL mm	DCONMS $_{h8}$ mm	ZEFP	EUR U2	
4	20	56	3,55	6	18,17	**040**
5	22	63	4,00	6	20,09	**050**
6	22	63	5,00	6	20,09	**060**
8	25	71	6,30	6	23,91	**080**
10	25	71	8,00	6	29,10	**100**
12	28	80	10,00	6	42,62	**120**
14	32	90	12,50	8	48,64	**140**
16	32	90	12,50	8	53,01	**160**
18	36	100	16,00	8	64,48	**180**
20	36	100	16,00	8	70,37	**200**

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

All other diameters, tolerance classes and chamfers also available on request.

Stub reamers, DIN 8089-B

▲ 0.01 mm steps
▲ tolerance: Ø 3.76 – 5.50 mm = +0.004 mm
▲ tolerance: Ø 5.51 – 12.00 mm = +0.005 mm

AR 100



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

DC mm	L mm	OAL mm	DCONMS h8 mm	ZEFP	40 139 ... EUR U2	
3,76 - 3,81	20	56	3,55	6	27,88	xxxxx[1]
3,82 - 3,94	20	56	3,55	6	20,35	xxxxx[1]
3,95	20	56	3,55	6	20,35	03950[1]
3,96	20	56	3,55	6	20,35	03960[1]
3,97	20	56	3,55	6	20,35	03970[1]
3,98	20	56	3,55	6	20,35	03980[1]
3,99	20	56	3,55	6	20,35	03990[1]
4,00	20	56	3,55	6	20,35	04000[1]
4,01	20	56	3,55	6	20,35	04010[1]
4,02	20	56	3,55	6	20,35	04020[1]
4,03 - 4,20	20	56	3,55	6	20,35	xxxxx[1]
4,21 - 4,25	20	56	3,55	6	24,59	xxxxx[1]
4,26 - 4,75	22	63	4,00	6	24,59	xxxxx[1]
4,76 - 4,94	22	63	4,00	6	21,57	xxxxx[1]
4,95	22	63	4,00	6	21,57	04950[1]
4,96	22	63	4,00	6	21,57	04960[1]
4,97	22	63	4,00	6	21,57	04970[1]
4,98	22	63	4,00	6	21,57	04980[1]
4,99	22	63	4,00	6	21,57	04990[1]
5,00	22	63	4,00	6	21,57	05000[1]
5,01	22	63	4,00	6	21,57	05010[1]
5,02	22	63	4,00	6	21,57	05020[1]
5,03	22	63	4,00	6	21,57	05030[1]
5,04	22	63	4,00	6	21,57	05040[1]
5,05	22	63	4,00	6	21,57	05050[1]
5,06 - 5,20	22	63	4,00	6	21,57	xxxxx[1]
5,21 - 5,30	22	63	4,00	6	24,59	xxxxx[1]
5,31 - 5,70	22	63	5,00	6	24,59	xxxxx[1]
5,71 - 5,94	22	63	5,00	6	24,59	xxxxx[1]
5,95	22	63	5,00	6	24,59	05950[1]
5,96	22	63	5,00	6	24,59	05960[1]
5,97	22	63	5,00	6	24,59	05970[1]
5,98	22	63	5,00	6	24,59	05980[1]
5,99	22	63	5,00	6	24,59	05990[1]
6,00	22	63	5,00	6	24,59	06000[1]
6,01	22	63	5,00	6	24,59	06010[1]
6,02	22	63	5,00	6	24,59	06020[1]
6,03 - 6,11	22	63	5,00	6	24,59	xxxxx[1]
6,12 - 6,70	22	63	5,00	6	26,38	xxxxx[1]
6,71 - 6,94	25	71	6,30	6	26,38	xxxxx[1]
6,95	25	71	6,30	6	26,38	06950[1]
6,96	25	71	6,30	6	26,38	06960[1]
6,97	25	71	6,30	6	26,38	06970[1]
6,98	25	71	6,30	6	26,38	06980[1]
6,99	25	71	6,30	6	26,38	06990[1]
7,00	25	71	6,30	6	26,38	07000[1]
7,01	25	71	6,30	6	26,38	07010[1]
7,02	25	71	6,30	6	26,38	07020[1]
7,03 - 7,25	25	71	6,30	6	26,38	xxxxx[1]
7,26 - 7,94	25	71	6,30	6	26,38	xxxxx[1]
7,95	25	71	6,30	6	26,38	07950[1]
7,96	25	71	6,30	6	26,38	07960[1]
7,97	25	71	6,30	6	26,38	07970[1]
7,98	25	71	6,30	6	26,38	07980[1]
7,99	25	71	6,30	6	26,38	07990[1]
8,00	25	71	6,30	6	26,38	08000[1]
8,01	25	71	6,30	6	26,38	08010[1]
8,02	25	71	6,30	6	26,38	08020[1]
8,03	25	71	6,30	6	26,38	08030[1]
8,04	25	71	6,30	6	26,38	08040[1]
8,05 - 8,20	25	71	6,30	6	26,38	xxxxx[1]
8,21 - 8,50	25	71	6,30	6	33,33	xxxxx[1]
8,51 - 8,94	25	71	8,00	6	33,33	xxxxx[1]
8,95	25	71	8,00	6	33,33	08950[1]
8,96	25	71	8,00	6	33,33	08960[1]
8,97	25	71	8,00	6	33,33	08970[1]
8,98	25	71	8,00	6	33,33	08980[1]
8,99	25	71	8,00	6	33,33	08990[1]
9,00	25	71	8,00	6	33,33	09000[1]
9,01	25	71	8,00	6	33,33	09010[1]
9,02	25	71	8,00	6	33,33	09020[1]
9,03 - 9,25	25	71	8,00	6	33,33	xxxxx[1]
9,26 - 9,94	25	71	8,00	6	33,33	xxxxx[1]
9,95	25	71	8,00	6	33,33	09950[1]
9,96	25	71	8,00	6	33,33	09960[1]
9,97	25	71	8,00	6	33,33	09970[1]
9,98	25	71	8,00	6	33,33	09980[1]
9,99	25	71	8,00	6	33,33	09990[1]
10,00	25	71	8,00	6	33,33	10000[1]
10,01	25	71	8,00	6	33,33	10010[1]
10,02	25	71	8,00	6	33,33	10020[1]
10,03 - 10,20	25	71	8,00	6	33,33	xxxxx[1]
10,21 - 10,60	25	71	8,00	6	42,49	xxxxx[1]
10,61 - 11,20	28	80	10,00	6	42,49	xxxxx[1]
11,21 - 11,25	28	80	10,00	6	49,46	xxxxx[1]
11,26 - 11,94	28	80	10,00	6	49,46	xxxxx[1]
11,95	28	80	10,00	6	49,46	11950[1]
11,96	28	80	10,00	6	49,46	11960[1]
11,97	28	80	10,00	6	49,46	11970[1]
11,98	28	80	10,00	6	49,46	11980[1]
11,99	28	80	10,00	6	49,46	11990[1]
12,00	28	80	10,00	6	49,46	12000[1]

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time 16 working days

→ **Page 101**
Here you will find the fit dimensions that can be covered with this tool concept.
For xxxxx please indicate required Ø in the order (e.g. Ø 10.06 mm → Article no. 40 139 10060)!

All other diameters, tolerance classes and chamfers also available on request.

Machine reamers HSS-E DIN 208

▲ the circular land on the cutting edge burnishes the hole and guides the reamer

N



Left Hand Helix
PLGANG 45°
HSS-E
Through hole

40 160 ...

DC H7 mm	L mm	LU mm	OAL mm	MK	ZEFP	EUR U2	
16	52	127	210	2	8	62,31	**160**
17	54	132	214	2	8	66,95	**170**
18	56	137	219	2	8	69,42	**180**
19	58	142	223	2	8	72,82	**190**
20	60	147	228	2	8	72,82	**200**
21	62	151	232	2	8	82,81	**210**
22	64	156	237	2	8	82,81	**220**
23	66	160	241	2	8	95,22	**230**
24	68	167	268	3	8	97,68	**240**
25	68	167	268	3	8	100,60	**250**
26	70	172	273	3	8	107,70	**260**
27	71	177	277	3	10	119,40	**270**
28	71	177	277	3	10	119,40	**280**
29	73	181	281	3	10	133,40	**290**
30	73	181	281	3	10	123,40	**300**
32	77	190	317	4	10	162,70	**320**
34	78	194	321	4	10	180,40	**340**
35	78	195	321	4	10	180,40	**350**
36	79	200	325	4	10	198,20	**360**
38	81	204	329	4	10	215,80	**380**
40	81	204	329	4	10	217,30	**400**
42	82	211	333	4	12	237,70	**420**
44	83	215	336	4	12	282,80	**440**
50	86	224	344	4	12	355,20	**500**

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 88

Hand reamers, DIN 206-B

▲ PLGANG ≤ Ø 3,5 = 30°; > Ø 3,5 = 45°/30°

H



Left Hand Helix
HSS
Through hole

40 100 ...

DC H7 mm	L mm	OAL mm	DRVS mm	DCONMS mm	ZEFP	EUR U2	
3,0	31	62	2,24	3,0	6	26,22	**030**
3,2	33	66	2,50	3,2	6	32,52	**032**
3,5	35	71	2,80	3,5	6	30,87	**035**
4,0	38	76	3,15	4,0	6	22,42	**040**
4,5	41	81	3,55	4,5	6	27,18	**045**
5,0	44	87	4,00	5,0	6	26,22	**050**
5,5	47	93	4,50	5,5	6	28,14	**055**
6,0	47	93	4,50	6,0	6	25,41	**060**
7,0	54	107	5,60	7,0	6	27,46	**070**
8,0	58	115	6,30	8,0	6	28,83	**080**
9,0	62	124	7,10	9,0	6	32,52	**090**
10,0	66	133	8,00	10,0	6	32,52	**100**
11,0	71	142	9,00	11,0	6	35,93	**110**
12,0	76	152	10,00	12,0	6	38,81	**120**
13,0	76	152	10,00	13,0	6	57,26	**130**
14,0	81	163	11,20	14,0	8	62,31	**140**
15,0	81	163	11,20	15,0	8	66,00	**150**
16,0	87	175	12,50	16,0	8	68,32	**160**
17,0	87	175	14,00	17,0	8	72,28	**170**
18,0	93	188	14,00	18,0	8	80,06	**180**
19,0	93	188	14,00	19,0	8	86,35	**190**
20,0	100	201	16,00	20,0	8	84,84	**200**
22,0	107	215	18,00	22,0	8	97,68	**220**
24,0	115	231	20,00	24,0	8	117,10	**240**
25,0	115	231	20,00	25,0	8	115,70	**250**
26,0	115	231	20,00	26,0	8	123,40	**260**
28,0	124	247	22,40	28,0	10	158,50	**280**
30,0	124	247	22,40	30,0	10	165,40	**300**

P	●
M	○
K	●
N	●
S	○
H	
O	●

All other diameters, tolerance classes and chamfers also available on request.

Insert countersink 180°

Scope of supply:
Indexable insert countersink including clamping screws

WPS



NEW

SIG 180°

DC mm	PHD mm	ZEFP	ZNF	DCONMS mm	LU mm	OAL mm	Insert	30 198 ... EUR U1/4D	
10	5,3	1	1	16	10	80	WOEX 030204	180,00	**01000** [1]
11	6,4	1	1	16	11	80	WOEX 030204	180,00	**01100** [1]
15	8,4	1	1	16	15	80	WOEX 05T304	180,00	**01500**
18	10,4	1	1	16	18	80	WOEX 05T304	186,90	**01800**
20	13,0	1	1	25	20	100	WOEX 05T304	205,50	**02000**
24	15,0	2	2	25	24	100	WOEX 05T304	291,10	**02400**
26	17,0	2	2	25	26	100	WOEX 05T304	291,10	**02600**
30	19,0	2	2	25	30	100	WOEX 06T304	297,60	**03000**
33	21,0	2	2	25	33	100	WOEX 080404	298,90	**03300**
36	21,0	2	2	25	36	100	WOEX 080404	303,90	**03600**
40	25,0	2	2	25	40	100	WOEX 080404	311,60	**04000**
48	28,0	2	2	32	48	120	WOEX 100504	339,60	**04800**

1) Without Through Coolant

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			10 950 ... EUR W7/6B	
10 - 11	T06 - IP	13,39	**123**	M2,0x4,3 - 06IP	2,99	**10000**
15 - 26	T08 - IP	13,16	**125**	M2,5x7,2 - 08IP	2,99	**10500**
30	T10 - IP	14,91	**127**	M3,5x7,3 - 10IP	2,99	**10600**
33 - 48	T15 - IP	15,33	**128**	M4,5x9 - 15IP	2,66	**12700**

WOEX

Designation	L	IC	S	D1
	mm	mm	mm	mm
WOEX 0302..	3,2	5	2,30	2,30
WOEX 05T3..	5,3	8	3,80	2,85
WOEX 06T3..	6,6	10	3,80	4,05
WOEX 0804..	7,9	12	4,80	4,90
WOEX 1005..	9,9	15	5,30	4,90



WOEX

		-01 K10		-01 BK8425	
		WOEX		WOEX	
		10 821 ...		10 821 ...	
ISO	RE mm	EUR 1A/3#		EUR 1A/3#	
030204	0,4	11,06	35301	14,91	30301
05T304	0,4	12,16	35501	16,28	30501
06T304	0,4	13,52	35601	18,19	30601
080404	0,4	18,32	35801	22,95	30801
100504	0,4	24,90	36001	31,31	31001
P				●	
M				●	
K				●	
N		●		○	
S		●		●	
H				○	
O		●			

→ v_c Page 89

Indexable chamfer milling 90°

Scope of supply:
Indexable insert countersink including clamping screws

WPS



SIG 90°

30 196 ...

DCX mm	DCN mm	PHD mm	ZEFP	ZNF	DCONMS mm	OAL mm	Insert	EUR U1/4D	
19	7	9,5	2	2	16	100	TOHX 090204	273,40	**19000**
23	11	12,0	2	2	16	100	TOHX 090204	277,20	**23000**
26	11	12,0	1	2	16	100	TOHX 090204	279,70	**26000**
30	12	13,0	2	2	20	100	TOHX 140305	292,60	**30000**
34	16	17,0	2	2	20	100	TOHX 140305	297,60	**34000**
37	19	20,0	2	2	20	100	TOHX 140305	297,60	**37000**

TORX® Screws

Key D

62 950 ... **80 950 ...**

Spare parts DCX		EUR W7/6B			EUR Y7	
19 - 26	M2,6x6,2 - 08IP	3,05	**09900**	T08 - IP	13,16	**125**
30 - 37	M3,5x7,3 - 10IP	3,05	**12600**	T10 - IP	14,91	**127**

Indexable chamfer milling 60°

Scope of supply:
Indexable insert countersink including clamping screws

WPS



SIG 60°

DCX mm	DCN mm	PHD mm	ZEFP	ZNF	DCONMS mm	OAL mm	Insert	30 197 ... EUR U1/4D	
16,5	8,1	8,5	1	1	16	100	TOHX 090204	277,20	**16500**
20,0	11,6	12,0	2	2	16	100	TOHX 090204	279,70	**20000**
22,0	13,6	14,0	2	2	16	100	TOHX 090204	292,60	**22000**
23,5	15,1	15,5	2	2	16	100	TOHX 090204	297,60	**23500**
25,5	17,1	17,5	2	2	16	100	TOHX 090204	297,60	**25500**

TORX® Screws

Key D

Spare parts DCX	62 950 ...		80 950 ...	
		EUR W7/6B		EUR Y7
16,5 - 22	M2,6x5,2 - 08IP	3,05 **12000**	T08 - IP	13,16 **125**
23,5 - 25,5	M2,6x6,2 - 08IP	3,05 **09900**	T08 - IP	13,16 **125**

TOHX

Designation	L	IC	S	D1
	mm	mm	mm	mm
TOHX 0902..	9,12	5,6	2,50	2,8
TOHX 1403..	13,62	8,2	3,00	3,8



TOHX

	-G06 BK8425	-U877 BK8425	-G12 BK8425
	F TOHX	F TOHX	F TOHX
	62 602 ...	62 604 ...	62 603 ...
ISO / RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
090204EN / 0,4		28,15 31400	28,97 31400
140305EN / 0,5	32,54 33000		
P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	●	●	●
H	○	○	○
O			

→ v_c Page 89

TOHX

	-U877 K10	-G12 K10
	F TOHX	F TOHX
	62 604 ...	62 603 ...
ISO / RE mm	EUR 1A/3#	EUR 1A/3#
090204EN / 0,4	24,90 51400	
090204FN / 0,4		23,79 51600
140305FN / 0,5		27,75 52800
P		
M		
K		
N	●	●
S	●	●
H		
O	●	●

→ v_c Page 89

Counterbore, DIN 373

▲ with fixed pilot
▲ with 3 cutting edges, right-hand flutes for counterbores according to DIN 74
▲ for countersinking to suit hexagon socket screws according to DIN 912, DIN 6912, DIN 7984 and cap screws according to DIN 84



fine
SIG 180°
HSS

medium
SIG 180°
HSS

Thread	DC_2 z9 mm	DCONMS h9 mm	OAL mm	DC_1 e8 mm	30 190 ... EUR U1		30 191 ... EUR U1	
M3	6	5,0	71	3,2	17,35	030 1)		
M3	6	5,0	71	3,4			17,35	030 1)
M4	8	5,0	71	4,3	14,08	040 1)		
M4	8	5,0	71	4,5			14,08	040 1)
M5	10	8,0	80	5,3	15,44	050 1)		
M5	10	8,0	80	5,5			15,44	050 1)
M6	11	8,0	80	6,4	16,52	060 1)		
M6	11	8,0	80	6,6			16,52	060 1)
M8	15	12,5	100	8,4	26,38	080 1)		
M8	15	12,5	100	9,0			26,38	080 1)
M10	18	12,5	100	10,5	31,14	100 1)		
M10	18	12,5	100	11,0			31,14	100 1)
M12	20	12,5	100	13,0	34,30	120		
M12	20	12,5	100	13,5			34,30	120
P					●		●	
M					●		●	
K					●		●	
N					●		●	
S					○		○	
H								
O					●		●	

1) Included in the set

→ v_c Page 94

Counterbore, DIN 373 – Set

Scope of supply:
Counterbores M3; M4; M5; M6; M8; M10 in case

30 190 ... EUR U1		30 191 ... EUR U1	
134,40	999	134,40	999

Countersink 90° with irregular pitch, DIN 335-C

▲ all sizes with 3 cutting edges and highly irregular pitch, resulting in smooth running, excellent roundness and chatter reduction giving the highest surface quality
▲ special HPC-TiN coating
▲ for very high tool life in almost all materials
▲ greatly reduced axial and radial forces
▲ for countersinking to DIN 7991

N



NEW

HPC-TiN



SIG 90°
Solid carbide

4

DC_2 z9 mm	DC_1 mm	DCONMS h9 mm	OAL mm	DIN 7991	30 117 ... EUR U1	
6,3	1,5	5	45	M3	122,10	**06300**
8,3	2,0	6	50	M4	131,20	**08300**
10,4	2,5	6	50	M5	136,90	**10400** 1)
12,4	2,8	8	56	M6	143,70	**12400**
16,5	3,2	10	60	M8	175,90	**16500** 1)
20,5	3,5	10	60	M10	202,00	**20500**
25,0	3,8	10	67	M12	232,90	**25000** 1)
31,0	4,2	12	71	M16	276,10	**31000**

P	●
M	○
K	●
N	●
S	○
H	○
O	○

1) Included in the set

→ v_c Page 91

Countersink 90° with irregular pitch, DIN 335-C – Set

Scope of supply:
Countersinks Ø 10.4 / 16.5 / 25.0 mm in storage case

N

NEW

HPC-TiN

30 117 ... EUR U1	
592,30	**99900**

Countersink 60°
factory standard-C

▲ with 3 cutting edges for countersinking and deburring in high-tensile steels, grey cast iron, aluminium alloys containing silicon and corrosion resistant steels.

N



SIG 60°
Solid carbide

30 160 ...

DC_2 z9 mm	DC_1 mm	DCONMS h9 mm	OAL mm	EUR U1	
12,5	3,2	8	56	227,60	**125**
16,0	4,0	10	63	317,30	**160**
20,0	5,0	10	67	365,10	**200**
25,0	6,3	10	71	404,20	**250**

P	●
M	○
K	●
N	●
S	○
H	○
O	

→ v_c Page 90

Countersink 90°,
factory standard-C

▲ with 3 cutting edges for countersinking and deburring in high-tensile steels, grey cast iron, alumínium alloys containing silicon and corrosion resistant steels.

N



SIG 90°
Solid carbide

30 115 ...

DC_2 z9 mm	DC_1 mm	DCONMS h9 mm	OAL mm	DIN ISO 7721	DIN 7991	EUR U1	
10,4	2,5	8	46	M5		169,60	**100**
12,4	2,8	8	56		M6	181,10	**124**
15,0	3,2	10	60	M8		189,80	**150**
16,5	3,2	10	60		M8	223,10	**165**
20,5	3,5	10	63		M10	237,60	**205**
25,0	3,8	10	67		M12	267,90	**250**
31,0	4,2	12	71		M16	381,00	**310**

P	●
M	○
K	●
N	●
S	○
H	○
O	

→ v_c Page 90

Countersink 90° with irregular pitch, DIN 335-C

▲ all sizes with 3 cutting edges and highly irregular pitch, resulting in smooth running, excellent roundness and chatter reduction giving the highest surface quality
▲ for very high tool life in almost all materials
▲ greatly reduced axial and radial forces
▲ for countersinking to DIN ISO 7721 and DIN 7991

N



NEW

TiN

SIG 90°
HSS

4

DC_2 z9 mm	DC_1 mm	DCONMS h9 mm	OAL mm	DIN ISO 7721	DIN 7991	30 141 ... EUR U1	
4,3	1,3	4	40	M2		19,36	04300
6,0	1,5	5	45	M3		19,61	06000
6,3	1,5	5	45		M3	19,61	06300
8,0	2,0	6	50	M4		22,68	08000
8,3	2,0	6	50		M4	22,68	08300
10,0	2,5	6	50	M5		25,04	10000
10,4	2,5	6	50		M5	27,09	10400 1)
11,5	2,8	8	56	M6		27,81	11500
12,4	2,8	8	56		M6	29,78	12400
15,0	3,2	10	60	M8		34,45	15000
16,5	3,2	10	60		M8	36,36	16500 1)
19,0	3,5	10	63	M10		44,81	19000
20,5	3,5	10	63		M10	46,61	20500
23,0	3,8	10	67	M12		59,46	23000
25,0	3,8	10	67		M12	60,89	25000 1)
31,0	4,2	12	71		M16	75,79	31000

P	●
M	○
K	●
N	●
S	○
H	○
O	○

1) Included in the set

→ v_c Page 91

Countersink 90° with irregular pitch, DIN 335-C – Set

Scope of supply:
Countersinks Ø 10.4 / 16.5 / 25.0 mm in storage case

N

NEW

TiN

30 141 ... EUR U1	
129,10	99900

Countersink 90°, DIN 335-C

▲ 3 cutting edges to avoid burrs and chatter marks when countersinking and deburring in virtually all materials. Particularly suitable for DIN screws according to DIN ISO 7721 and 7991, as the countersink diameters are matched to the heads of these screws.
▲ the TiN version makes high cutting rates possible; very long tool life and very good friction resistance properties in order to avoid material sticking.
▲ TiAlN version shows considerably improved performance compared to TiN version. Particularly suitable for all abrasive materials (cast iron, AlSi) and/or at high temperature.



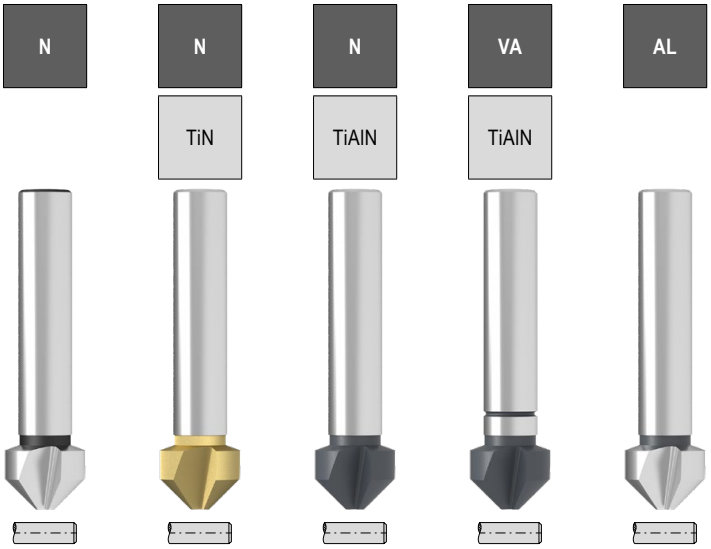

DC_2 z9	DC_1	DCONMS	OAL	DIN ISO 7721	DIN 7991	30 100 ...		30 110 ...		30 130 ...		30 132 ...		30 102 ...	
mm	mm	mm	mm			EUR U1		EUR U1		EUR U1		EUR U1		EUR U1	
4,3	1,3	4	40	M2		8,99	043								
5,0	1,5	4	40	M2,5		9,31	050	18,51	050	24,94	050				
6,0	1,5	5	45	M3		9,45	060								
6,3	1,5	5	45		M3	9,45	063 1)	18,51	063 1)	25,06	063	20,20	063	13,64	063
7,0	1,8	6	50	M3,5		9,99	070								
8,0	2,0	6	50	M4		10,33	080	21,45	080	26,33	080				
8,3	2,0	6	50		M4	10,70	083 1)	21,45	083 1)	26,46	083	23,84	083	14,62	083
9,4	2,2	6	50			11,72	094								
10,0	2,5	6	50	M5		12,45	100	23,27	100	28,29	100				
10,4	2,5	6	50		M5	12,99	104 1)	25,64	104 1)	28,57	104	26,46	104	16,68	104
11,5	2,8	8	56	M6		13,49	115								
12,4	2,8	8	56		M6	13,80	124 1)	28,13	124 1)	36,61	124	29,11	124	17,35	124
13,4	2,9	8	56			14,90	134								
15,0	3,2	10	60	M8		16,39	150	32,16	150	46,38	150	36,90	150	20,09	150
16,5	3,2	10	60		M8	17,77	165 1)	34,13	165 1)	48,47	165	39,14	165	21,17	165
19,0	3,5	10	63	M10		22,26	190								
20,5	3,5	10	63		M10	23,22	205 1)	48,07	205 1)	62,54	205	46,38	205	29,53	205
23,0	3,8	10	67	M12		28,95	230								
25,0	3,8	10	67		M12	30,87	250	65,89	250	89,68	250	60,73	250	39,34	250
31,0	4,2	12	71		M16	47,16	310	84,97	310	122,40	310	90,39	310		
31,0	4,2	12	67		M16									62,99	310
P						●		●		●		○		○	
M						○		○		○		●		○	
K						●		●		●		○		○	
N						●		●		●		○		●	
S						○		○		○		○		○	
H								○		○		○			
O						●		●		●		●		●	

1) Included in the set

→ v_c Page 92+93

Countersink 90°, DIN 335-C – set

Scope of supply:
Countersinks Ø 6,3; 8,3; 10,4; 12,4; 16,5; 20,5 in case

N

TiN

30 100 ...		30 110 ...	
EUR U1		EUR U1	
92,36	999	179,80	999

Countersink 60°, DIN 334-C

▲ 3 cutting edges for countersinking and deburring in virtually all materials



SIG 60°
HSS

DC_2 z9 mm	DC_1 mm	DCONMS h9 mm	OAL mm	30 150 ... EUR U1	
6,3	1,6	5	45	10,36	**063** 1)
8,0	2,0	6	50	10,54	**080** 1)
10,0	2,5	6	52	13,29	**100** 1)
12,5	3,2	8	56	13,64	**125** 1)
16,0	4,0	10	63	17,21	**160** 1)
20,0	5,0	10	67	24,03	**200** 1)
25,0	6,3	10	71	32,25	**250**

P	●
M	○
K	●
N	●
S	○
H	
O	●

1) Included in the set

→ v_c Page 94

Countersink 90°, DIN 335-C

▲ 3 cutting edges to avoid burrs and chatter marks when countersinking and deburring in virtually all materials. Particularly suitable for DIN screws according to DIN ISO 7721 and 7991, as the countersink diameters are matched to the heads of these screws.

N



SIG 90°
HSS

DC_2 z9 mm	DC_1 mm	OAL mm	MK	30 105 ... EUR U1	
30	4,2	112	2	58,07	**300**
31	4,2	112	2	62,31	**310**
34	4,5	118	2	62,31	**340**
37	4,8	118	2	71,05	**370**
40	10,0	140	3	86,09	**400**
50	14,0	150	3	103,20	**500**
63	16,0	180	4	164,00	**630**
80	22,0	190	4	266,50	**800**

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 94

Countersink 60°, DIN 334-C – set

Scope of supply:
Countersinks Ø 6,3; 8,0; 10,0; 12,5; 16,0; 20,0 in case

30 150 ... EUR U1	
100,80	**999**

Countersink 120°, factory standard-C

▲ 3 cutting edges for countersinking and deburring in virtually all materials



SIG 120°
HSS

DC_2 z9 mm	DC_1 mm	DCONMS h9 mm	OAL mm	30 170 ... EUR U1	
6,3	1,5	5	45	12,89	**063**
8,3	2,0	6	50	12,89	**083**
10,4	2,5	6	50	14,34	**104**
12,4	2,8	8	56	15,31	**124**
16,5	3,2	10	60	22,26	**165**
20,5	3,5	10	60	30,61	**205**
25,0	3,8	10	63	37,44	**250**

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c Page 94

Deburring countersink 90°, factory standard-A

▲ with angled hole to avoid burrs and chattermarks when countersinking and deburring in soft long-chipping materials, e.g. aluminium, plastics etc.

TiN



SIG 90°
HSS-E

SIG 90°
HSS-E

DC_2 mm	PHD mm	DCONMS h9 mm	OAL mm	30 120 ... EUR U1		30 121 ... EUR U1	
6,3	1 - 4	6,3	45	21,57	**040** 1)	33,98	**040** 1)
10,0	2 - 5	6,0	45	13,28	**050**	20,34	**050**
14,0	5 - 10	8,0	48	16,39	**101**	27,15	**101**
21,0	10 - 15	10,0	65	28,14	**150**	39,56	**150**
28,0	15 - 20	12,0	85	56,84	**200**	80,66	**200**

P	●	●
M	○	○
K	●	●
N	●	●
S	○	○
H		○
O	●	●

1) can be used in both directions

→ v_c Page 95

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values for REAMAX TS

Index	40 577 ..., 40 585 ... 75J.65, 75H.65 – ASG3000 / HM-DBG-P						40 521 ..., 40 571 ... 75J.65, 75H.65 – ASG0106 / HM-DBG-P					
	Nominal Ø in mm ▸		18–21,999	22–31,799	31,8–51,999	52–65	Nominal Ø in mm ▸		18–21,999	22–31,799	31,8–51,999	52–65
	Reaming allowance Ø ▸		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50	Reaming allowance Ø ▸		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50
	Number of flutes ▸		6	6	8	10	Number of flutes ▸		6	6	8	10
	3xD	5xD					3xD	5xD				
	v_c (m/min)		f (mm/rev)				v_c (m/min)		f (mm/rev)			
P.1.1	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.2	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.3	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.4	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.1.5	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.1	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.2	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.3	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.2.4	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
P.3.1							**30** (25–50)	**30** (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.3.2							**30** (25–50)	**30** (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.3.3							**30** (25–50)	**30** (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.4.1							**45** (35–60)	**40** (35–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
P.4.2							**45** (35–60)	**40** (35–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
M.1.1							**45** (35–60)	**40** (30–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
M.2.1							**45** (35–60)	**40** (30–50)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
M.3.1							**30** (25–50)	**30** (25–40)	0,60–0,90	0,80–1,10	1,10–1,50	1,50–2,30
K.1.1	**150** (130–220)	**120** (100–150)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40						
K.1.2	**150** (130–220)	**120** (100–150)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40						
K.2.1	**175** (150–300)	**150** (130–180)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40						
K.2.2	**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
K.3.1	**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
K.3.2	**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX TS

Index	40 526 …, 40 580 … 75J.17, 75H.17 – ASG0706 / HM-DBC						40 539 … 75H.93 – ASG3000 / DST					
Nominal Ø in mm ▸			18–21,999	22–31,799	31,8–51,999	52–65			18–21,999	22–31,799	31,8–51,999	52–65
Reaming allowance Ø ▸			0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50			0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50
Number of flutes ▸			6	6	8	10			6	6	8	10
	3xD	5xD					3xD	5xD				
	v_c (m/min)		f (mm/rev)				v_c (m/min)		f (mm/rev)			
P.1.1							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.2							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.3							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.4							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.1.5							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.1							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.2							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.3							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.2.4							**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1							**175** (150–300)	**150** (130–180)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40
K.2.2							**120** (100–150)	**100** (80–120)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
K.3.1							**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
K.3.2							**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80
N.1.1	**150** (130–300)	**150** (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.1.2	**150** (130–300)	**150** (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.2.1	**200** (180–300)	**150** (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.2.2	**200** (180–300)	**150** (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.2.3	**200** (180–300)	**150** (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
N.3.1							150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10
N.3.2							150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10
N.3.3												
N.4.1	**150** (180–300)	**150** (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1	250 (220–270)	250 (220–270)	0,90–1,30	1,10–1,70	1,50–2,30	2,20–3,40						

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX TS

Index	40 544 … 75J.93 – ASG3000 / DST						40 597 … 75J.93 – ASG4000 / DST					
	Nominal Ø in mm ▸		18–21,999	22–31,799	31,8–51,999	52–65			18–21,999	22–31,799	31,8–51,999	52–65
	Reaming allowance Ø ▸		0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50			0,20–0,30	0,20–0,30	0,30–0,40	0,30–0,50
	Number of flutes ▸		6	6	8	10			6	6	8	10
	3xD	5xD					3xD	5xD				
	v_c (m/min)		f (mm/rev)				v_c (m/min)		f (mm/rev)			
P.1.1	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.2	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.3	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.4	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.1.5	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.1	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.2	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.3	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.2.4	**150** (130–200)	**120** (100–160)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**150** (130–200)	**120** (100–160)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1	**175** (150–300)	**150** (130–180)	0,90–1,30	1,20–1,70	1,60–2,30	2,30–3,40	**225** (200–300)	**180** (160–240)	1,20–1,60	1,50–2,00	2,00–2,70	2,90–4,10
K.2.2	**120** (100–150)	**100** (80–120)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**120** (100–150)	**100** (80–120)	1,20–1,60	1,50–2,00	2,00–2,70	2,90–4,10
K.3.1	**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80						
K.3.2	**120** (100–180)	**120** (100–150)	0,80–1,10	1,00–1,40	1,30–1,90	1,90–2,80	**120** (100–180)	**120** (100–150)	1,00–1,30	1,20–1,70	1,70–2,30	2,40–3,40
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10						
N.3.2	150 (130–320)	150 (130–200)	0,90–1,30	1,10–1,70	1,50–2,30	2,10–3,10						
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX

Index	40 560 … 640.65 – ASG3000 / HM-DBG-P					40 551 … 640.65 – ASG0106 / HM-DBG-P				
Nominal Ø in mm ▸			12–21,999	22–32,000	32,001–40			12–21,999	22–32,000	32,001–40
Reaming allowance Ø ▸			0,10–0,30	0,20–0,40	0,20–0,40			0,10–0,30	0,20–0,40	0,20–0,40
Number of flutes ▸			6	8	8			6	8	8
	3xD	5xD				3xD	5xD			
	v_c (m/min)		f (mm/rev)			v_c (m/min)		f (mm/rev)		
P.1.1	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.2	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.3	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.4	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.5	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.1	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.2	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.3	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.4	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00
P.3.1						**30** (25–50)	**30** (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
P.3.2						**30** (25–50)	**30** (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
P.3.3						**30** (25–50)	**30** (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
P.4.1						**45** (35–60)	**40** (35–50)	0,70–0,90	1,20–1,60	1,20–1,60
P.4.2						**45** (35–60)	**40** (35–50)	0,70–0,90	1,20–1,60	1,20–1,60
M.1.1						**45** (35–60)	**40** (35–50)	0,70–0,90	1,20–1,60	1,20–1,60
M.2.1						**30** (25–50)	**30** (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
M.3.1						**30** (25–50)	**30** (25–40)	0,70–0,90	1,20–1,60	1,20–1,60
K.1.1	**200** (180–250)	**160** (140–200)	1,00–1,40	1,30–1,90	1,30–1,90					
K.1.2	**200** (180–250)	**160** (140–200)	1,00–1,40	1,30–1,90	1,30–1,90					
K.2.1	**225** (200–300)	**180** (160–240)	1,00–1,40	1,30–1,90	1,30–1,90					
K.2.2	**120** (100–150)	**100** (80–120)	0,90–1,20	1,20–1,60	1,20–1,60					
K.3.1	**150** (130–250)	**120** (100–200)	0,90–1,20	1,20–1,60	1,20–1,60					
K.3.2	**120** (100–150)	**100** (80–120)	0,90–1,20	1,20–1,60	1,20–1,60					
N.1.1										
N.1.2										
N.2.1										
N.2.2										
N.2.3										
N.3.1										
N.3.2										
N.3.3										
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1						**40** (35–60)	**40** (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
H.1.2						**40** (35–60)	**40** (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
H.1.3						**30** (25–50)	**30** (25–50)	0,40–0,80	0,60–1,00	0,60–1,00
H.1.4										
H.2.1						**40** (35–60)	**40** (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
H.3.1						**40** (35–60)	**40** (35–60)	0,40–0,80	0,60–1,00	0,60–1,00
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										

4

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX

Index	40 505 … 640.71 – ASG3000 / HM-TiN					40 570 … 640.27 – ASG0706 / HM-DBC				
Nominal Ø in mm ▸			12–21,999	22–32,000	32,001–40			12–21,999	22–32,000	32,001–40
Reaming allowance Ø ▸			0,10–0,30	0,20–0,40	0,20–0,40			0,10–0,30	0,20–0,40	0,20–0,40
Number of flutes ▸			6	8	8			6	8	8
	3xD	5xD				3xD	5xD			
	v_c (m/min)		f (mm/rev)			v_c (m/min)		f (mm/rev)		
P.1.1	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.2	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.3	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.4	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.1.5	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.1	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.2	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.3	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.2.4	100 (80–140)	80 (60–120)	0,90–1,20	1,50–2,00	1,50–2,00					
P.3.1										
P.3.2										
P.3.3										
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1	80 (60–130)	80 (60–120)	1,00–1,40	1,80–2,40	1,80–2,40					
K.1.2	80 (60–130)	80 (60–120)	1,00–1,40	1,80–2,40	1,80–2,40					
K.2.1										
K.2.2										
K.3.1										
K.3.2										
N.1.1						**150** (130–300)	**150** (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.1.2						**200** (180–300)	**150** (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.2.1						**200** (180–300)	**150** (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.2.2						**200** (180–300)	**150** (130–200)	1,00–1,40	1,70–2,40	1,70–2,40
N.2.3										
N.3.1	**120** (100–200)	**120** (100–150)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.2	**120** (100–200)	**120** (100–150)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.3	**80** (60–150)	**80** (60–120)	0,80–1,20	1,40–2,00	1,40–2,00					
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1						250 (220–270)	250 (220–270)	1,00–1,40	1,70–2,40	1,70–2,40

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for REAMAX

Index	40 525 … 640.93 – ASG3000 / DST					40 536 … 640.93 – ASG4000 / DST				
Nominal Ø in mm ▸			12–21,999	22–32,000	32,001–40			12–21,999	22–32,000	32,001–40
Reaming allowance Ø ▸			0,10–0,30	0,20–0,40	0,20–0,40			0,10–0,30	0,20–0,40	0,20–0,40
Number of flutes ▸			6	8	8			6	8	8
	3xD	5xD				3xD	5xD			
	v_c (m/min)		f (mm/rev)			v_c (m/min)		f (mm/rev)		
P.1.1	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.2	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.3	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.4	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.1.5	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.1	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.2	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.3	**150** (130–200)	**120** (100–160)	0,90–1,20	1,50–2,00	1,50–2,00	**150** (130–200)	**120** (100–160)	1,10–1,40	1,80–2,40	1,80–2,40
P.2.4										
P.3.1										
P.3.2										
P.3.3										
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1										
K.1.2										
K.2.1	**175** (150–300)	**150** (130–180)	1,00–1,40	1,80–2,40	1,80–2,40	175 (150–300)	150 (130–180)	1,20–1,60	1,50–2,00	2,00–2,70
K.2.2	**150** (130–250)	**120** (100–160)	1,00–1,40	1,80–2,40	1,80–2,40	120 (100–180)	120 (100–150)	1,20–1,60	1,50–2,00	2,00–2,70
K.3.1	**150** (130–250)	**120** (100–160)	1,00–1,40	1,80–2,40	1,80–2,40					
K.3.2	**120** (100–180)	**120** (100–150)	0,90–1,20	1,50–2,00	1,50–2,00	120 (100–180)	120 (100–150)	1,00–1,30	1,20–1,70	1,70–2,30
N.1.1										
N.1.2										
N.2.1										
N.2.2										
N.2.3										
N.3.1	150 (130–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.2	150 (130–300)	150 (130–200)	1,00–1,40	1,70–2,40	1,70–2,40					
N.3.3										
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data for MultiChange exchange head reamers

Index	40 210 ..., 40 211 ... CWC10				40 220 ..., 40 221 ... TiAlN				40 240 ..., 40 241 ... K10			
	Nominal Ø in mm ▸	8,0–12,59	12,6–29,99	30,0–32,00	Nominal Ø in mm ▸	8,0–12,59	12,6–29,99	30,0–32,00	Nominal Ø in mm ▸	8,0–12,59	12,6–29,99	30,0–32,00
	Reaming allowance Ø ▸	0,15–0,3	0,2–0,4	0,2–0,4	Reaming allowance Ø ▸	0,15–0,3	0,15–0,3	0,15–0,3	Reaming allowance Ø ▸	0,15–0,5	0,15–0,5	0,15–0,5
	Number of flutes ▸	4 / 6	6	8	Number of flutes ▸	4 / 6	6	8	Number of flutes ▸	4 / 6	6	8
	v_c (m/min)	f (mm/rev)			v_c (m/min)	f (mm/rev)			v_c (m/min)	f (mm/rev)		
P.1.1	140	0,6	0,8	1,0								
P.1.2	140	0,6	0,8	1,0								
P.1.3	90	0,6	0,8	1,0								
P.1.4	90	0,6	0,8	1,0								
P.1.5	90	0,6	0,8	1,0								
P.2.1	140	0,6	0,8	1,0								
P.2.2	140	0,6	0,8	1,0								
P.2.3	90	0,6	0,8	1,0								
P.2.4	90	0,6	0,8	1,0								
P.3.1	120	0,6	0,8	1,0								
P.3.2	90	0,6	0,8	1,0								
P.3.3	90	0,6	0,8	1,0								
P.4.1					40	0,3	0,4	0,5				
P.4.2					40	0,3	0,4	0,5				
M.1.1					40	0,3	0,4	0,5				
M.2.1					40	0,3	0,4	0,5				
M.3.1					30	0,3	0,4	0,5				
K.1.1												
K.1.2												
K.2.1	120	0,7	1,2	1,6								
K.2.2	90	0,7	1,2	1,6								
K.3.1	90	0,7	1,2	1,6								
K.3.2	90	0,7	1,2	1,6								
N.1.1									30	0,4	0,5	0,6
N.1.2									30	0,4	0,5	0,6
N.2.1									30	0,4	0,5	0,6
N.2.2									30	0,4	0,5	0,6
N.2.3									30	0,4	0,5	0,6
N.3.1									30	0,4	0,5	0,6
N.3.2									30	0,4	0,5	0,6
N.3.3									30	0,4	0,5	0,6
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for Monomax

Index	40 656 …, 40 666 …, 40 657 …, 40 665 … 56J.65, 56R.65, 56H.65, 56Q.65 – ASG3000 / HM-DBG-P						40 652 …, 40 653 … 56J.65, 56R.65 – ASG0106 / HM-DBG-P					
	Nominal Ø in mm ▸		5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899	Nominal Ø in mm ▸		5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899
	Reaming allowance Ø ▸		0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40	Reaming allowance Ø ▸		0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40
	Number of flutes ▸		4	6	6	6	Number of flutes ▸		4	6	6	6
	3xD	5xD	f (mm/rev)				3xD	5xD	f (mm/rev)			
	v_c (m/min)						v_c (m/min)					
P.1.1	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.1.2	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.1.3	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.1.4	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.1.5	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.2.1	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.2.2	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.2.3	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
P.2.4	**60** (50–100)	**60** (50–100)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90	**60** (50–100)	**60** (50–100)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90
P.3.1							**40** (35–60)	**40** (35–60)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90
P.3.2							**40** (35–60)	**40** (35–60)	0,20–0,30	0,40–0,50	0,50–0,70	0,60–0,90
P.3.3							**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00
P.4.1							**45** (35–60)	**40** (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00
P.4.2							**45** (35–60)	**40** (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00
M.1.1							**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00
M.2.1							**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00
M.3.1							**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00
K.1.1	**150** (130–220)	**120** (100–150)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50						
K.1.2	**150** (130–220)	**120** (100–150)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50						
K.2.1	**175** (150–300)	**150** (130–180)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50						
K.2.2	**120** (100–180)	**120** (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
K.3.1	**150** (130–250)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50						
K.3.2	**120** (100–180)	**120** (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30						
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Monomax

Index	40 644 ..., 40 645 ...						40 605 ..., 40 606 ...					
	56H.65, 56Q.65 – ASG0106 / HM-DBG-P						56J.71, 56R.71 – ASG3000 / HM-TiN					
	Nominal Ø in mm ▸		5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899	Nominal Ø in mm ▸		5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899
	Reaming allowance Ø ▸		0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40	Reaming allowance Ø ▸		0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40
	Number of flutes ▸		4	6	6	6	Number of flutes ▸		4	6	6	6
	3xD	5xD					3xD	5xD				
	v_c (m/min)		f (mm/rev)				v_c (m/min)		f (mm/rev)			
P.1.1							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.2							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.3							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.4							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.1.5							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.1							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.2							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.3							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.2.4							100 (80–140)	80 (60–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
P.3.1	**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.3.2	**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.3.3	**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.4.1	**45** (35–60)	**40** (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
P.4.2	**45** (35–60)	**40** (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
M.1.1	**45** (35–60)	**40** (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
M.2.1	**45** (35–60)	**40** (35–50)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
M.3.1	**30** (25–50)	**30** (25–40)	0,30–0,40	0,40–0,60	0,60–0,80	0,70–1,00						
K.1.1							80 (60–130)	80 (60–120)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50
K.1.2							80 (60–130)	80 (60–120)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1							**120** (–200)	**120** (–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50
N.3.2							**120** (–200)	**120** (–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50
N.3.3							**80** (–150)	**80** (–120)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Monomax

Index	40 625 ..., 40 626 ... 56J.93, 56R.93 – ASG3000 / DST						40 635 ... , 40 636 ... 56J.93, 56R.93 – ASG4000 / DST					
Nominal Ø in mm ▸			5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899			5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899
Reaming allowance Ø ▸			0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40			0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40
Number of flutes ▸			4	6	6	6			4	6	6	6
	3xD	5xD					3xD	5xD				
	v_c (m/min)		f (mm/rev)				v_c (m/min)		f (mm/rev)			
P.1.1	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.2	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.3	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.4	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.1.5	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.1	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.2	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.3	**150** (130–200)	**120** (100–160)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	**150** (130–200)	**120** (100–160)	0,40–0,60	0,70–0,90	0,90–1,20	1,20–1,50
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1	**175** (150–300)	**150** (130–180)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50	175 (150–300)	150 (130–180)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50
K.2.2	**120** (100–150)	**100** (80–120)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
K.3.1	**150** (130–250)	**120** (100–200)	0,40–0,60	0,70–0,90	0,90–1,20	1,10–1,50	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
K.3.2	**120** (100–180)	**120** (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30	120 (100–180)	120 (100–150)	0,30–0,50	0,50–0,70	0,70–1,00	0,90–1,30
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	150 (130–300)	150 (130–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50						
N.3.2	150 (130–300)	150 (130–200)	0,40–0,60	0,60–0,90	0,80–1,20	1,10–1,50						
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Monomax

Index	40 648 …, 40 649 … 56J.17, 56R.17 – ASG0706 / DBC						40 640 …, 40 641 … 56H.17, 56Q.17 – ASG0706 / DBC					
Nominal Ø in mm ▸			5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899			5,6–8,899	8,9–12,00	12,01–22,00	22,01–25,899
Reaming allowance Ø ▸			0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40			0,10–0,20	0,10–0,30	0,20–0,30	0,20–0,40
Number of flutes ▸			4	6	6	6			4	6	6	6
	3xD	5xD					3xD	5xD				
	v_c (m/min)		f (mm/rev)				v_c (m/min)		f (mm/rev)			
P.1.1												
P.1.2												
P.1.3												
P.1.4												
P.1.5												
P.2.1												
P.2.2												
P.2.3												
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1												
K.1.2												
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1	**150** (130–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	**150** (130–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.1.2	**150** (130–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	**150** (130–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.2.1	**200** (180–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	**200** (180–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.2.2	**200** (180–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	**200** (180–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.2.3	**200** (180–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	**200** (180–300)	**150** (130–200)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1	250 (220–270)	250 (220–270)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50	250 (220–270)	250 (220–270)	0,40–0,60	0,40–0,60	0,80–1,20	0,80–1,50

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Fullmax, long

Index	UNI	40 484 ..., 40 485 ..., 40 486 ..., 40 487 ... Type UNI											
	Ø range (mm) ▸	Ø 2,97 – 4,05		Ø 4,06 – 6,05		Ø 6,06 – 7,55		Ø 7,56 – 12,05		Ø 12,06 – 16,05		Ø 16,06 – 20,05	
	Number of flutes ▸	4		4		6		6		6		6	
	v_c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.1.2	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.1.3	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.1.4	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.1.5	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.2.1	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.2.2	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.2.3	**180** (160–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,40–1,80	0,20	1,50–1,90	0,20–0,30	1,80–2,20	0,30
P.2.4	**80** (70–120)	0,40–0,50	0,10–0,20	0,40–0,60	0,10–0,20	0,90–1,10	0,20	1,00–1,20	0,20	1,00–1,30	0,20–0,30	1,30–1,50	0,30
P.3.1	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
P.3.2	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
P.3.3	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
P.4.1	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
P.4.2	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
M.1.1	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
M.2.1	**20** (15–40)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
M.3.1	**15** (10–30)	0,32–0,50	0,10–0,20	0,32–0,50	0,10–0,20	0,48–0,60	0,20	0,48–0,60	0,20	0,60–0,72	0,20–0,30	0,60–0,72	0,30
K.1.1	**120** (100–180)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20	0,30
K.1.2	**120** (100–180)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20	0,30
K.2.1	**200** (180–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20	0,30
K.2.2	**120** (100–150)	0,50–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,00–1,30	0,20	1,30–1,60	0,20–0,30	1,50–1,80	0,30
K.3.1	**200** (180–250)	0,60–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,60	0,20	1,30–1,60	0,20	1,60–2,00	0,20–0,30	1,90–2,20	0,30
K.3.2	**120** (100–150)	0,50–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,00–1,30	0,20	1,30–1,60	0,20–0,30	1,50–1,80	0,30
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1	150 (130–250)	0,50–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,40	0,20	1,40–1,70	0,20	1,60–1,90	0,20–0,30	1,90–2,20	0,30
N.3.2	100 (80–150)	0,40–0,60	0,10–0,20	0,60–0,80	0,10–0,20	1,00–1,30	0,20	1,20–1,40	0,20	1,30–1,60	0,20–0,30	1,60–1,80	0,30
N.3.3													
N.4.1													
S.1.1													
S.1.2													
S.2.1	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.2.2	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.2.3													
S.3.1	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.3.2	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.3.3													
H.1.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20	1,20–1,80	0,20
H.1.2	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20	1,20–1,80	0,20
H.1.3	30 (25–50)	0,50–0,70	0,10–0,20	0,70–1,00	0,10–0,20	1,20–1,70	0,20	1,30–1,70	0,20	1,30–2,00	0,20	1,30–2,00	0,20
H.1.4													
H.2.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80	0,30
H.3.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80	0,30
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Fullmax, long

Index	K	40 477 …, 40 478 …					
		Type K					
	Ø range (mm) ▸	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
	Reaming allowance Ø ▸	0,10–0,20	0,10–0,20	0,20	0,20	0,20–0,30	0,30
	Number of flutes ▸	6	6	8	8	8	8
	v_c (m/min)	f (mm/rev)					
K.1.1	**200** (180–250)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60
K.1.2	**200** (180–250)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60
K.2.1	**225** (200–300)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60
K.2.2	**120** (100–150)	0,60–0,90	0,70–1,00	1,20–1,60	1,20–1,60	1,50–1,90	1,80–2,20
K.3.1	**225** (200–300)	0,80–1,00	0,90–1,20	1,50–1,90	1,50–1,90	1,80–2,30	2,20–2,60
K.3.2	**120** (100–150)	0,60–0,90	0,70–1,00	1,20–1,60	1,20–1,60	1,50–1,90	1,80–2,20

Index	VA	40 401 …, 40 402 …, 40 403 …, 40 404 …					
		Type VA					
	Ø range (mm) ▸	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
	Reaming allowance Ø ▸	0,10–0,20	0,10–0,20	0,20	0,20	0,20–0,30	0,30
	Number of flutes ▸	4	4	6	6	6	6
	v_c (m/min)	f (mm/rev)					
P.3.1	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
P.3.2	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
P.3.3	20 (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
P.4.1	**20** (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
P.4.2	**20** (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
M.1.1	**20** (15–40)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
M.2.1	**15** (10–30)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72
M.3.1	**15** (10–30)	0,32–0,50	0,32–0,50	0,48–0,60	0,48–0,60	0,60–0,72	0,60–0,72

Index	ALU	40 471 …, 40 472 …, 40 473 …, 40 474 …					
		Type ALU					
	Ø range (mm) ▸	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
	Reaming allowance Ø ▸	0,10–0,20	0,10–0,20	0,20	0,20	0,20–0,30	0,30
	Number of flutes ▸	4	4	6	6	6	6
	v_c (m/min)	f (mm/rev)					
N.1.1	**200** (180–300)	0,50–0,60	0,60–0,90	1,10–1,60	1,20–1,60	1,20–1,80	1,20–1,80
N.1.2	**200** (180–300)	0,50–0,60	0,60–0,90	1,10–1,60	1,20–1,60	1,20–1,80	1,20–1,80
N.2.1	**200** (180–250)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00
N.2.2	**200** (180–300)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00
N.2.3	**200** (180–250)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00
O.3.1	250 (220–270)	0,50–0,70	0,70–1,00	1,20–1,70	1,30–1,70	1,30–2,00	1,30–2,00

Index	H	40 475 …, 40 476 …					
		Type H					
	Ø range (mm) ▸	Ø 2,97 – 4,05	Ø 4,06 – 6,05	Ø 6,06 – 7,55	Ø 7,56 – 12,05	Ø 12,06 – 16,05	Ø 16,06 – 20,05
	Reaming allowance Ø ▸	0,10–0,20	0,10–0,20	0,20	0,20	0,20	0,20
	Number of flutes ▸	4	4	6	6	6	6
	v_c (m/min)	f (mm/rev)					
H.1.1	**40** (35–60)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.1.2	**30** (25–50)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.1.3	**30** (25–50)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.1.4	**30** (25–50)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.2.1	**40** (35–60)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80
H.3.1	**40** (35–60)	0,20–0,30	0,20–0,30	0,40–0,60	0,50–0,60	0,50–0,70	0,60–0,80

* Wet machining recommended

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for Fullmax, short

Index	UNI	40 481 …, 40 483 …, 40 488 …, 40 489 … Type UNI											
	Ø range (mm) ▸	Ø 2,97 – 4,05		Ø 4,06 – 6,05		Ø 6,06 – 7,55		Ø 7,56 – 12,05		Ø 12,06 – 15,97		Ø 15,98 – 20,05	
	Number of flutes ▸	4		4		6		6		6		6	
	v_c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.1.2	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.1.3	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.1.4	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.1.5	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.2.1	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.2.2	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.2.3	**200** (180–250)	0,65–0,80	0,10–0,20	0,75–0,90	0,10–0,20	1,40–1,60	0,20	1,65–1,80	0,20	1,65–1,90	0,20–0,30	2,56–3,00	0,30
P.2.4	**65** (55–110)	0,45–0,50	0,10–0,20	0,45–0,60	0,10–0,20	1,00–1,10	0,20	1,20–1,30	0,20	1,20–1,40	0,20–0,30	1,90–2,10	0,30
P.3.1	**40** (30–80)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30
P.3.2	**40** (30–80)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30
P.3.3	**40** (30–80)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30
P.4.1	**45** (40–65)	0,45–0,50	0,10–0,20	0,45–0,60	0,10–0,20	1,00–1,10	0,20	1,20–1,30	0,20	1,20–1,40	0,20–0,30	1,90–2,10	0,30
P.4.2	**45** (40–65)	0,45–0,50	0,10–0,20	0,45–0,60	0,10–0,20	1,00–1,10	0,20	1,20–1,30	0,20	1,20–1,40	0,20–0,30	1,90–2,10	0,30
M.1.1	**40** (35–60)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30
M.2.1	**40** (35–60)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30
M.3.1	**40** (35–60)	0,40–0,60	0,10–0,20	0,50–0,70	0,10–0,20	1,00–1,30	0,20	1,10–1,40	0,20	1,20–1,50	0,20–0,30	1,90–2,25	0,30
K.1.1	**200** (180–250)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,50–2,90	0,30
K.1.2	**200** (180–250)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,50–2,90	0,30
K.2.1	**225** (200–300)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,50–2,90	0,30
K.2.2	**120** (100–150)	0,60–0,90	0,10–0,20	0,70–1,00	0,10–0,20	1,20–1,60	0,20	1,20–1,60	0,20	1,50–1,90	0,20–0,30	2,00–2,40	0,30
K.3.1	**225** (200–300)	0,80–1,00	0,10–0,20	0,90–1,20	0,10–0,20	1,50–1,90	0,20	1,50–1,90	0,20	1,80–2,30	0,20–0,30	2,00–2,40	0,30
K.3.2	**120** (100–150)	0,60–0,90	0,10–0,20	0,70–1,00	0,10–0,20	1,20–1,60	0,20	1,20–1,60	0,20	1,50–1,90	0,20–0,30	2,00–2,40	0,30
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1	150 (120–250)	0,50–0,80	0,10–0,20	0,70–0,90	0,10–0,20	1,30–1,40	0,20	1,40–1,70	0,20	1,60–1,90	0,20–0,30	2,50–2,90	0,30
N.3.2	100 (80–150)	0,40–0,60	0,10–0,20	0,60–0,80	0,10–0,20	1,00–1,30	0,20	1,20–1,40	0,20	1,30–1,60	0,20–0,30	2,10–2,40	0,30
N.3.3													
N.4.1													
S.1.1													
S.1.2													
S.2.1	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.2.2	40 (30–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.2.3													
S.3.1	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.3.2	30 (25–60)	0,30–0,40	0,10–0,20	0,40–0,50	0,10–0,20	0,70–0,90	0,20	0,80–1,10	0,20	0,90–1,10	0,20–0,30	1,10–1,30	0,30
S.3.3													
H.1.1	40 (35–60)	0,20–0,30	0,10–0,20	0,20–0,30	0,10–0,20	0,40–0,60	0,20	0,50–0,60	0,20	0,50–0,70	0,20	0,80–1,00	0,20
H.1.2	30 (25–50)	0,20–0,30	0,10–0,20	0,20–0,30	0,10–0,20	0,40–0,60	0,20	0,50–0,60	0,20	0,50–0,70	0,20	0,80–1,00	0,20
H.1.3	30 (25–50)	0,20–0,30	0,10–0,20	0,20–0,30	0,10–0,20	0,40–0,60	0,20	0,50–0,60	0,20	0,50–0,70	0,20	0,80–1,00	0,20
H.1.4													
H.2.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80	0,30
H.3.1	40 (35–60)	0,50–0,60	0,10–0,20	0,60–0,90	0,10–0,20	1,10–1,60	0,20	1,20–1,60	0,20	1,20–1,80	0,20–0,30	1,20–1,80	0,30
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data standard values for solid carbide reamers

Index	40 420 ..., 40 421 ..., 40 430 ..., 40 431 ...																			
			≤ Ø 0,94		Ø 0,95–5		Ø 5,01–8		Ø 8,01–10		Ø 10,01–12		Ø 12,01–15		Ø 15,01–20		Ø 20,01–25		Ø 25,01–30	
	uncoated	TiAlN																		
	v_c (m/min)		f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	**20**	**30**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.2	**20**	**30**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.3	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.4	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.1.5	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.1	**15**	**25**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.2	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.3	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.2.4	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.3.1	**15**	**25**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.3.2	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.3.3	**12**	**15**	0,10	0,10	0,10	0,10	0,15	0,15	0,20	0,20	0,20	0,20	0,25	0,20	0,30	0,30	0,30	0,30	0,30	0,30
P.4.1																				
P.4.2																				
M.1.1		15			0,08	0,08	0,10	0,10	0,15	0,10	0,15	0,10	0,20	0,20	0,25	0,20	0,25	0,20	0,25	0,20
M.2.1		15			0,08	0,08	0,10	0,10	0,15	0,10	0,15	0,10	0,20	0,20	0,25	0,20	0,25	0,20	0,25	0,20
M.3.1		10			0,08	0,08	0,10	0,10	0,15	0,10	0,15	0,10	0,20	0,20	0,25	0,20	0,25	0,20	0,25	0,20
K.1.1	18	**30**	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.1.2	18	**30**	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.2.1	15	**25**	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.2.2	10	**20**	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.3.1	15	**25**	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
K.3.2	10	**20**	0,10	0,10	0,10	0,10	0,20	0,15	0,30	0,20	0,30	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.1.1	**40**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.1.2	**40**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.2.1	**25**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.2.2	**25**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.2.3																				
N.3.1	**30**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.3.2	**30**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.3.3	**30**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
N.4.1																				
S.1.1		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.1.2		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.2.1		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.2.2		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.2.3		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.3.1		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.3.2		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
S.3.3		10			0,06	0,05	0,10	0,10	0,12	0,10	0,12	0,10	0,18	0,15–0,20	0,20	0,20	0,20	0,20	0,20	0,20
H.1.1		8			0,05	0,05	0,08	0,05	0,10	0,10	0,10	0,10	0,13	0,10	0,15	0,15	0,15	0,15	0,15	0,15
H.1.2		8			0,05	0,05	0,08	0,05	0,10	0,10	0,10	0,10	0,13	0,10	0,15	0,15	0,15	0,15	0,15	0,15
H.1.3																				
H.1.4																				
H.2.1		8			0,05	0,05	0,08	0,05	0,10	0,10	0,10	0,10	0,13	0,10	0,15	0,15	0,15	0,15	0,15	0,15
H.3.1																				
O.1.1	**40**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
O.1.2	**40**		0,15	0,10	0,15	0,10	0,20	0,15	0,25	0,20	0,25	0,20	0,30	0,20	0,40	0,30	0,40	0,30	0,40	0,30
O.2.1																				
O.2.2																				
O.3.1																				

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for solid carbide reamers – Type H

Index	H / *	40 435 …							
		Ø 0,98 – 3,99		Ø 4,00 – 8,00		Ø 8,01 – 16,00		Ø 16,01 – 20,00	
	v_c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	16	0,10	0,20	0,20	0,20	0,238	0,30	0,275	0,30
P.1.2	13	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.1.3	12	0,075	0,20	0,15	0,20	0,175	0,30	0,20	0,30
P.1.4	12	0,075	0,20	0,15	0,20	0,175	0,30	0,20	0,30
P.1.5	19	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.1	15	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.2	14	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.3	13	0,08	0,20	0,16	0,20	0,195	0,30	0,23	0,30
P.2.4	12	0,075	0,20	0,15	0,20	0,175	0,30	0,20	0,30
P.3.1									
P.3.2	11	0,063	0,20	0,125	0,20	0,15	0,30	0,175	0,30
P.3.3	11	0,063	0,20	0,125	0,20	0,15	0,30	0,175	0,30
P.4.1	11	0,063	0,20	0,125	0,20	0,15	0,30	0,175	0,30
P.4.2	8	0,05	0,20	0,10	0,20	0,113	0,30	0,125	0,30
M.1.1									
M.2.1	9	0,063	0,10	0,125	0,10	0,15	0,20	0,175	0,20
M.3.1	9	0,063	0,10	0,125	0,10	0,15	0,20	0,175	0,20
K.1.1	17	0,125	0,20	0,25	0,20	0,325	0,30	0,40	0,30
K.1.2	14	0,113	0,20	0,225	0,20	0,275	0,30	0,325	0,30
K.2.1	17	0,113	0,20	0,225	0,20	0,275	0,30	0,325	0,30
K.2.2	14	0,10	0,20	0,20	0,20	0,238	0,30	0,275	0,30
K.3.1	17	0,113	0,20	0,225	0,20	0,275	0,30	0,325	0,30
K.3.2	14	0,10	0,20	0,20	0,20	0,238	0,30	0,275	0,30
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1									
N.3.2									
N.3.3									
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1	8	0,075	0,10	0,15	0,20	0,175	0,30	0,20	0,30
H.1.2	7	0,063	0,10	0,125	0,20	0,15	0,30	0,175	0,30
H.1.3	5	0,05	0,10	0,10	0,20	0,113	0,30	0,125	0,30
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

* Wet machining preferred/dry machining possible

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for solid carbide reamers

Index	40 405 …, 40 415 …						
	uncoated	≤ Ø 4,80		Ø 4,81 – 8,00		Ø 8,01 – 12,00	
	v_c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.2	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.3	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.4	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.1.5	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.1	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.2	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.3	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.2.4	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.3.1	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.3.2	**15** (10–20)	0,1	0,05–0,1	0,15	0,1–0,15	0,175–0,2	0,1–0,2
P.3.3							
P.4.1							
P.4.2							
M.1.1							
M.2.1							
M.3.1							
K.1.1	15 (10–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.1.2	15 (10–20)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.2.1	15 (10–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.2.2	10 (5–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.3.1	15 (10–20)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
K.3.2	10 (5–15)	0,1	0,05–0,1	0,2	0,1–0,15	0,25–0,3	0,1–0,2
N.1.1	**30** (20–40)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.1.2	**30** (20–40)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.2.1	**15** (10–20)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.2.2	**15** (10–20)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.2.3							
N.3.1	**20** (15–25)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.3.2	**20** (15–25)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.3.3	**20** (15–25)	0,1–0,15	0,05–0,1	0,15–0,2	0,1–0,15	0,175–0,25	0,1–0,2
N.4.1							
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1							
S.3.2							
S.3.3							
H.1.1							
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1							
O.1.1							
O.1.2							
O.2.1							
O.2.2							
O.3.1							

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Cutting data for HSS-E reamers

Index	40 110 …, 40 115 …								
Nominal Ø in mm ▸		≤ Ø 5	Ø 5,01–8	Ø 8,01–12	Ø 12,01–15	Ø 15,01–20	Ø 20,01–25	Ø 25,01–30	Ø 30,01–40	Ø 40,01–50
Reaming allowance Ø ▸		0,10	0,15	0,20	0,20	0,30	0,30	0,30	0,30	0,30
	v_c (m/min)	f (mm/rev)								
P.1.1	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.2	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.3	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.4	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.1.5	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.1	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.2	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.3	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.2.4	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.3.1	12	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.3.2	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.3.3	10	0,10	0,15	0,20	0,25	0,30	0,30	0,30	0,40	0,40
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1	12	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.1.2	12	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.2.1	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.2.2	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.3.1	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
K.3.2	10	0,15	0,20	0,25	0,30	0,35	0,35	0,35	0,40	0,40
N.1.1	15	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.1.2	15	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.2.1										
N.2.2										
N.2.3										
N.3.1	20	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.3.2	20	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.3.3	20	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
N.4.1										
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1										
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1	25	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
O.1.2	25	0,15	0,20	0,20	0,25	0,30	0,30	0,30	0,40	0,40
O.2.1										
O.2.2										
O.3.1										

4

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data for HSS-E reamers

Index	40 139 ..., 40 140 ..., 40 145 ..., 40 150 ..., 40 160 ...																			
		≤ Ø 5		Ø 5,01–8		Ø 8,01–12		Ø 12,01–15		Ø 15,01–20		Ø 20,01–25		Ø 25,01–30		Ø 30,01–40		Ø 40,01–50	
	v_c (m/min)	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø	f (mm/rev)	Reaming allowance Ø
P.1.1	15	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,30	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.2	12	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,30	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.3	10	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,30	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.4	10	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.1.5	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.1	10	0,10	0,10–0,15	0,20	0,15–0,20	0,25	0,20	0,25	0,25	0,35	0,30	0,40	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.2	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.3	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.2.4	8	0,08	0,10–0,15	0,15	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,40	0,35	0,40	0,40	0,50	0,50
P.3.1	8	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.3.2	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.3.3	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.4.1	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
P.4.2	6	0,08	0,10–0,15	0,12	0,15–0,20	0,20	0,20	0,20	0,25	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,50
M.1.1	6	0,08	0,10	0,12	0,15	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35
M.2.1	4	0,08	0,10	0,12	0,15	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35
M.3.1	4	0,08	0,10	0,12	0,15	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35
K.1.1	14	0,10	0,10–0,15	0,16	0,20	0,24	0,20	0,28	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.1.2	12	0,10	0,10–0,15	0,16	0,20	0,24	0,20	0,28	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.2.1	12	0,10	0,10–0,15	0,16	0,15–0,20	0,20	0,20	0,25	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.2.2	10	0,10	0,10–0,15	0,16	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,35	0,40	0,40	0,40	0,40
K.3.1	12	0,10	0,10–0,15	0,16	0,20	0,24	0,20	0,28	0,25	0,35	0,30	0,35	0,35	0,35	0,35	0,40	0,40	0,50	0,40
K.3.2	10	0,10	0,10–0,15	0,16	0,15–0,20	0,20	0,20	0,25	0,25	0,30	0,30	0,30	0,35	0,35	0,35	0,40	0,40	0,40	0,40
N.1.1	20	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,60	0,45	0,80	0,50
N.1.2	20	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,60	0,45	0,80	0,50
N.2.1	18	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,60	0,45	0,80	0,50
N.2.2	18	0,10	0,15	0,20	0,20	0,25	0,20	0,30	0,25	0,40	0,30	0,40	0,35	0,50	0,40	0,50	0,45	0,80	0,50
N.2.3																			
N.3.1	18	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
N.3.2	15	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
N.3.3	15	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
N.4.1	18	0,10	0,15	0,18	0,30	0,20	0,30	0,25	0,30	0,30	0,30	0,30	0,40	0,30	0,40	0,40	0,50	0,40	0,50
S.1.1																			
S.1.2																			
S.2.1	4	0,08	0,10	0,12	0,15	0,16	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.2.2	4	0,08	0,10	0,12	0,15	0,16	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.2.3																			
S.3.1	6	0,08	0,10	0,12	0,15	0,16	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.3.2	4	0,08	0,10	0,10	0,15	0,125	0,20	0,20	0,20	0,25	0,20	0,30	0,25	0,30	0,30	0,35	0,35	0,40	0,35
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1	15	0,15	0,15	0,20	0,20	0,25	0,20	0,25	0,25	0,30	0,30	0,30	0,30	0,35	0,35	0,40	0,40	0,40	0,50
O.1.2	12	0,12	0,15	0,16	0,20	0,20	0,20	0,20	0,25	0,25	0,30	0,25	0,30	0,30	0,35	0,30	0,40	0,35	0,50
O.2.1																			
O.2.2																			
O.3.1																			

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values indexable insert countersink

Index	30 196 ..., 30 197 ...			30 198 ...					
	Insert		Tool diameter	Insert		Tool diameter			
	BK8425	K10	Ø 16,5–37	BK8425	K10	Ø 10–15	Ø 15–20	Ø 20–30	Ø 30–48
	v_c (m/min)		f (mm/rev)	v_c (m/min)		f (mm/rev)			
P.1.1	200		0,12–0,16	260		0,06–0,12	0,12–0,20	0,15–0,25	0,20–0,30
P.1.2	200		0,20–0,30	260		0,06–0,12	0,12–0,20	0,15–0,25	0,20–0,30
P.1.3	200		0,20–0,30	270		0,06–0,12	0,12–0,20	0,25–0,40	0,25–0,40
P.1.4	180		0,20–0,30	240		0,06–0,12	0,12–0,20	0,25–0,40	0,25–0,40
P.1.5	180		0,17–0,27	230		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.2.1	160		0,20–0,30	270		0,06–0,12	0,12–0,20	0,25–0,40	0,25–0,40
P.2.2	160		0,20–0,30	260		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.2.3	160		0,15–0,20	180		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.2.4	160		0,10–0,16	150		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.3.1	140		0,10–0,15	160		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.3.2	140		0,08–0,13	130		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.3.3	140		0,06–0,12	120		0,04–0,08	0,15	0,20–0,30	0,20–0,35
P.4.1	120		0,10–0,16	180		0,08	0,15	0,16	0,18
P.4.2	120		0,06–0,12	130		0,08	0,15	0,16	0,18
M.1.1	160		0,10–0,15	150		0,08	0,15	0,16	0,18
M.2.1	140		0,10–0,15	150		0,08	0,15	0,16	0,18
M.3.1	100		0,07–0,13	130		0,08	0,15	0,16	0,18
K.1.1	180		0,40	160		0,15	0,30	0,40	0,60
K.1.2	160		0,32	120		0,15	0,30	0,40	0,60
K.2.1	140		0,30	160		0,15	0,25	0,30	0,35
K.2.2	140		0,18	100		0,12	0,20	0,25	0,35
K.3.1	120		0,20	120		0,10	0,18	0,25	0,30
K.3.2	120		0,18	100		0,10	0,18	0,25	0,30
N.1.1		250	0,20	400	250	0,05	0,12	0,15	0,20
N.1.2		250	0,20	400	250	0,05	0,12	0,15	0,20
N.2.1		250	0,30	250	250	0,06	0,16	0,20	0,25
N.2.2		250	0,30	250	250	0,06	0,16	0,20	0,25
N.2.3		250	0,25	230	250	0,10	0,20	0,25	0,30
N.3.1		230	0,30	200	230	0,05	0,10	0,12	0,15
N.3.2		230	0,32	220	230	0,05	0,10	0,12	0,15
N.3.3		230	0,22	330	230	0,05	0,10	0,12	0,15
N.4.1		230	0,30	200	230	0,05	0,10	0,12	0,15
S.1.1	60	20	0,12		20	0,05	0,10	0,12	0,15
S.1.2	50	20	0,10		20	0,05	0,10	0,12	0,15
S.2.1	60	20	0,12		20	0,05	0,10	0,12	0,15
S.2.2	50	20	0,10		20	0,05	0,10	0,12	0,15
S.2.3	30	20	0,06		20	0,05	0,10	0,12	0,15
S.3.1	100	60	0,22		60	0,05	0,10	0,12	0,15
S.3.2	80	30	0,20		30	0,05	0,10	0,12	0,15
S.3.3	50	30	0,12		30	0,05	0,10	0,12	0,15
H.1.1	100		0,10	100		0,05	0,10	0,15	0,20
H.1.2	80		0,08	80		0,05	0,10	0,15	0,20
H.1.3	50		0,05	50		0,05	0,10	0,15	0,20
H.1.4									
H.2.1	100		0,10	100		0,05	0,10	0,15	0,20
H.3.1	80		0,08	80		0,05	0,10	0,15	0,20
O.1.1		100	0,10		100	0,05	0,12	0,15	0,20
O.1.2		100	0,10		100	0,05	0,12	0,15	0,20
O.2.1									
O.2.2		100	0,03		100	0,05	0,12	0,15	0,20
O.3.1		100	0,08		100	0,05	0,12	0,15	0,20

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data for solid carbide countersinks

Index	30 115 … Solid carbide 90°						30 160 … Solid carbide 60°			
		Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0		Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0
	v_c (m/min)	f (mm/rev)					v_c (m/min)	f (mm/rev)		
P.1.1	40	0,10	0,12	0,14	0,18	0,22	40	0,12	0,14	0,18
P.1.2	40	0,10	0,12	0,14	0,18	0,22	40	0,12	0,14	0,18
P.1.3	30	0,08	0,10	0,10	0,14	0,18	30	0,10	0,10	0,14
P.1.4	30	0,08	0,10	0,12	0,14	0,18	30	0,10	0,12	0,14
P.1.5	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.2.1	30	0,08	0,10	0,12	0,14	0,18	30	0,10	0,12	0,14
P.2.2	20	0,05	0,06	0,08	0,10	0,12	20	0,06	0,08	0,10
P.2.3	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.2.4	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.3.1	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.3.2	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.3.3	18	0,05	0,06	0,08	0,10	0,12	18	0,06	0,08	0,10
P.4.1										
P.4.2										
M.1.1	15	0,06	0,07	0,08	0,09	0,12	15	0,07	0,08	0,09
M.2.1	15	0,06	0,07	0,08	0,09	0,12	15	0,07	0,08	0,09
M.3.1	15	0,06	0,07	0,08	0,09	0,12	15	0,07	0,08	0,09
K.1.1	24	0,12	0,14	0,18	0,20	0,25	24	0,14	0,18	0,20
K.1.2	24	0,12	0,14	0,18	0,20	0,25	24	0,14	0,18	0,20
K.2.1	18	0,12	0,14	0,18	0,20	0,25	18	0,14	0,18	0,20
K.2.2	18	0,12	0,14	0,18	0,20	0,25	18	0,14	0,18	0,20
K.3.1	24	0,12	0,14	0,18	0,20	0,25	24	0,14	0,18	0,20
K.3.2	18	0,12	0,14	0,18	0,20	0,25	18	0,14	0,18	0,20
N.1.1	58	0,12	0,14	0,18	0,22	0,26	58	0,14	0,18	0,22
N.1.2	58	0,12	0,14	0,18	0,22	0,26	58	0,14	0,18	0,22
N.2.1	45	0,12	0,14	0,18	0,22	0,26	45	0,14	0,18	0,22
N.2.2	45	0,12	0,14	0,18	0,22	0,26	45	0,14	0,18	0,22
N.2.3	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.3.1	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.3.2	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.3.3	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
N.4.1	50	0,14	0,18	0,20	0,24	0,30	50	0,18	0,20	0,24
S.1.1	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.1.2	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.2.1	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.2.2	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.2.3	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.3.1	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.3.2	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
S.3.3	12	0,05	0,06	0,07	0,08	0,10	12	0,06	0,07	0,08
H.1.1	8	0,06	0,08	0,08	0,10	0,12	8	0,08	0,08	0,10
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1										
O.1.2										
O.2.1										
O.2.2										
O.3.1										

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for countersinks with irregular pitch

Index	30 117 ... HPC-TiN / Solid carbide							30 141 ... TiN / HSS						
	N	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0	N	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0
	v_c (m/min)	f (mm/rev)						v_c (m/min)	f (mm/rev)					
P.1.1	58	0,08	0,10	0,12	0,14	0,18	0,22	38	0,08	0,10	0,12	0,14	0,18	0,22
P.1.2	58	0,08	0,10	0,12	0,14	0,18	0,22	38	0,08	0,10	0,12	0,14	0,18	0,22
P.1.3	50	0,06	0,08	0,10	0,10	0,14	0,18	30	0,06	0,08	0,10	0,10	0,14	0,18
P.1.4	50	0,06	0,08	0,10	0,12	0,14	0,18	30	0,06	0,08	0,10	0,12	0,14	0,18
P.1.5	50	0,06	0,05	0,06	0,08	0,10	0,12	30	0,06	0,05	0,06	0,08	0,10	0,12
P.2.1	50	0,06	0,08	0,10	0,12	0,14	0,18	30	0,06	0,08	0,10	0,12	0,14	0,18
P.2.2	50	0,06	0,05	0,06	0,08	0,10	0,12	12	0,06	0,05	0,06	0,08	0,10	0,12
P.2.3	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.2.4	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.3.1	50	0,06	0,05	0,06	0,08	0,10	0,12	30	0,06	0,05	0,06	0,08	0,10	0,12
P.3.2	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.3.3	40	0,04	0,05	0,06	0,08	0,10	0,12	12	0,04	0,05	0,06	0,08	0,10	0,12
P.4.1	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
P.4.2	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
M.1.1	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
M.2.1	30	0,05	0,06	0,07	0,08	0,09	0,12	15	0,05	0,06	0,07	0,08	0,09	0,12
M.3.1	25	0,05	0,06	0,07	0,08	0,09	0,12							
K.1.1	50	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.1.2	50	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.2.1	45	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.2.2	45	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.3.1	35	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
K.3.2	35	0,10	0,12	0,14	0,18	0,20	0,25	20	0,10	0,12	0,14	0,18	0,20	0,25
N.1.1	80	0,10	0,12	0,14	0,18	0,22	0,26	48	0,10	0,12	0,14	0,18	0,22	0,26
N.1.2	80	0,10	0,12	0,14	0,18	0,22	0,26	48	0,10	0,12	0,14	0,18	0,22	0,26
N.2.1	60	0,10	0,12	0,14	0,18	0,22	0,26	40	0,10	0,12	0,14	0,18	0,22	0,26
N.2.2	60	0,10	0,12	0,14	0,18	0,22	0,26	40	0,10	0,12	0,14	0,18	0,22	0,26
N.2.3	60	0,10	0,14	0,18	0,20	0,24	0,30	40	0,10	0,14	0,18	0,20	0,24	0,30
N.3.1	68	0,12	0,14	0,18	0,20	0,24	0,30	40	0,12	0,14	0,18	0,20	0,24	0,30
N.3.2	68	0,12	0,14	0,18	0,20	0,24	0,30	40	0,12	0,14	0,18	0,20	0,24	0,30
N.3.3	68	0,12	0,14	0,18	0,20	0,24	0,30	40	0,12	0,14	0,18	0,20	0,24	0,30
N.4.1														
S.1.1	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.1.2	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.2.1	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.2.2	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.2.3	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.3.1	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.3.2	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
S.3.3	15	0,05	0,06	0,07	0,08	0,09	0,10	10	0,05	0,06	0,07	0,08	0,09	0,10
H.1.1	12	0,05	0,06	0,07	0,07	0,08		6	0,05	0,06	0,07	0,07	0,08	
H.1.2	8	0,05	0,06	0,07	0,07	0,08								
H.1.3														
H.1.4														
H.2.1	12	0,05	0,06	0,07	0,07	0,08								
H.3.1														
O.1.1	68	0,12	0,14	0,18	0,20	0,24	0,30	38	0,12	0,14	0,18	0,20	0,24	0,30
O.1.2	68	0,12	0,14	0,18	0,20	0,24	0,30	38	0,12	0,14	0,18	0,20	0,24	0,30
O.2.1	25	0,10	0,12	0,14	0,18	0,20	0,25							
O.2.2	25	0,10	0,12	0,14	0,18	0,20	0,25							
O.3.1	25	0,10	0,12	0,14	0,18	0,20	0,25							

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for HSS countersink

Index	30 100 ... Type N							30 102 ... Type AL						
	N	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0	AL	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0
	v_c (m/min)	f (mm/rev)						v_c (m/min)	f (mm/rev)					
P.1.1	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.2	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.3	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.4	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.5	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.1	25	0,04–0,06	0,08	0,10	0,12	0,14	0,18	25	0,04–0,06	0,08	0,10	0,12	0,14	0,18
P.2.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.4	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.1	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.4.1														
P.4.2														
M.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
K.1.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.1.2	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.1	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25
N.1.1	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	39	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.1.2	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	39	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.1	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	28	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.2	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	28	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.3	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	28	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.3.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	39	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	39	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.3	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	39	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.4.1	60	0,10–0,13	0,16	0,20	0,23	0,26	0,30	66	0,10–0,13	0,16	0,20	0,23	0,26	0,30
S.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.1.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.1.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.3.1														

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for HSS countersink

Index	30 110 ..., 30 130 ... Type N – TiN / TiAlN							30 132 ... Type VA – TiAlN						
	N	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0	VA	Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0
	v_c (m/min)	f (mm/rev)						v_c (m/min)	f (mm/rev)					
P.1.1	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.2	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22	35	0,06–0,08	0,10	0,12	0,14	0,18	0,22
P.1.3	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.4	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	29	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14
P.1.5	14	0,03–0,04	0,05	0,06	0,08	0,10	0,12	14	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.1	29	0,04–0,06	0,08	0,10	0,12	0,14	0,18	29	0,04–0,06	0,08	0,10	0,12	0,14	0,18
P.2.2	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.3	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.2.4	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.1	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	13	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.2	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	13	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.3.3	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	13	0,03–0,04	0,05	0,06	0,08	0,10	0,12
P.4.1														
P.4.2														
M.1.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	11	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.2.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	11	0,04–0,05	0,06	0,07	0,08	0,09	0,12
M.3.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	11	0,04–0,05	0,06	0,07	0,08	0,09	0,12
K.1.1	9	0,06–0,10	0,12	0,14	0,18	0,20	0,25	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.1.2	9	0,06–0,10	0,12	0,14	0,18	0,20	0,25	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.1	9	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.2.2	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.1	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25	14	0,06–0,10	0,12	0,14	0,18	0,20	0,25
K.3.2	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25
N.1.1	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.1.2	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26	40	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.1	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.2	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.2.3	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26	29	0,08–0,10	0,12	0,14	0,18	0,22	0,26
N.3.1	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.2	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.3.3	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
N.4.1	69	0,10–0,13	0,16	0,20	0,23	0,26	0,30	69	0,10–0,13	0,16	0,20	0,23	0,26	0,30
S.1.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.1.2	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.2	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.2.3	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.1	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.2	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
S.3.3	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12	9	0,04–0,05	0,06	0,07	0,08	0,09	0,12
H.1.1	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12	5	0,04–0,05	0,06	0,07	0,08	0,10	0,12
O.1.1	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.1.2	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.1	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.2.2	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30	40	0,10–0,12	0,14	0,18	0,20	0,24	0,30
O.3.1														

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for HSS countersink and counterbore

Index	30 105 ..., 30 150 ..., 30 170 .... HSS – 60° / 90° / 120°									30 190 ..., 30 191 ... HSS			
		Ø 4,3–8,0	Ø 8,0–12,4	Ø 12,4–16,5	Ø 16,5–20,5	Ø 20,5–25,0	Ø 25,0–31,0	Ø 31,0–55,0	Ø 55,0–80,0		DC_2 Ø 6,3	DC_2 Ø 10,0	DC_2 Ø 14,0
	v_c (m/min)	f (mm/rev)								v_c (m/min)	f (mm/rev)		
P.1.1	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	0,22–0,26	0,26–0,36	30	0,07	0,10	0,12
P.1.2	30	0,06–0,08	0,10	0,12	0,14	0,18	0,22	0,22–0,26	0,26–0,36	30	0,07	0,10	0,12
P.1.3	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	0,14–0,22	0,22–0,28	25	0,05	0,07	0,09
P.1.4	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12	0,14	0,14–0,22	0,22–0,28	25	0,05	0,07	0,09
P.1.5	12	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,14	0,14–0,18	12	0,04	0,05	0,07
P.2.1	25	0,04–0,06	0,08	0,10	0,12	0,14	0,18	0,18–0,24	0,24–0,30	25	0,05	0,07	0,09
P.2.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.2.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.2.4	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.3.1	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.3.2	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.3.3	10	0,03–0,04	0,05	0,06	0,08	0,10	0,12	0,12–0,16	0,16–0,18	10	0,04	0,05	0,06
P.4.1													
P.4.2													
M.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12–0,16	0,16–0,18	8	0,04	0,06	0,07
M.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12–0,16	0,16–0,18	8	0,04	0,06	0,07
M.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12–0,16	0,16–0,18	8	0,04	0,06	0,07
K.1.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	12	0,08	0,13	0,16
K.1.2	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	12	0,08	0,13	0,16
K.2.1	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	10	0,08	0,13	0,16
K.2.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	10	0,08	0,13	0,16
K.3.1	12	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	12	0,08	0,13	0,16
K.3.2	10	0,06–0,10	0,12	0,14	0,18	0,20	0,25	0,25–0,27	0,27–0,36	10	0,08	0,13	0,16
N.1.1	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	35	0,09	0,13	0,16
N.1.2	35	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	35	0,09	0,13	0,16
N.2.1	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	25	0,09	0,13	0,16
N.2.2	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	25	0,09	0,13	0,16
N.2.3	25	0,08–0,10	0,12	0,14	0,18	0,22	0,26	0,26–0,34	0,34–0,40	25	0,09	0,13	0,16
N.3.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30–0,42	0,42–0,46	35	0,11	0,16	0,18
N.3.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30–0,42	0,42–0,46	35	0,11	0,16	0,18
N.3.3	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30–0,42	0,42–0,46	35	0,11	0,16	0,18
N.4.1	60	0,10–0,13	0,16	0,20	0,23	0,26	0,30	0,30–0,42	0,42–0,46	60	0,12	0,18	0,21
S.1.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.1.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.2.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.2.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.2.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.3.1	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.3.2	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
S.3.3	8	0,04–0,05	0,06	0,07	0,08	0,09	0,12	0,12	0,12	8	0,04	0,06	0,07
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.1.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.2.1	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.2.2	35	0,10–0,12	0,14	0,18	0,20	0,24	0,30	0,30	0,30	35	0,11	0,16	0,18
O.3.1													

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for HSS-E deburring countersink

Index	30 120 ..., 30 121 ... HSS-E – 90°						
	TiN	uncoated	Ø 6,3	Ø 10,0	Ø 14,0	Ø 21,0	Ø 28,0
	v_c (m/min)		f (mm/rev)				
P.1.1	35	30	0,06–0,08	0,10	0,12	0,14	0,18
P.1.2	35	30	0,06–0,08	0,10	0,12	0,14	0,18
P.1.3	29	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12
P.1.4	29	25	0,04–0,06	0,04–0,06	0,08	0,10	0,12
P.1.5	14	12	0,03–0,04	0,05	0,06	0,08	0,10
P.2.1	29	25	0,04–0,06	0,08	0,10	0,12	0,14
P.2.2	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.2.3	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.2.4	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.3.1	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.3.2	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.3.3	12	10	0,03–0,04	0,05	0,06	0,08	0,10
P.4.1							
P.4.2							
M.1.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
M.2.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
M.3.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
K.1.1	9	12	0,06–0,10	0,12	0,14	0,18	0,20
K.1.2	9	12	0,06–0,10	0,12	0,14	0,18	0,20
K.2.1	9	10	0,06–0,10	0,12	0,14	0,18	0,20
K.2.2	14	10	0,06–0,10	0,12	0,14	0,18	0,20
K.3.1	14	12	0,06–0,10	0,12	0,14	0,18	0,20
K.3.2	12	10	0,06–0,10	0,12	0,14	0,18	0,20
N.1.1	40	35	0,08–0,1	0,12	0,14	0,18	0,22
N.1.2	40	35	0,08–0,1	0,12	0,14	0,18	0,22
N.2.1	29	25	0,08–0,1	0,12	0,14	0,18	0,22
N.2.2	29	25	0,08–0,1	0,12	0,14	0,18	0,22
N.2.3	29	25	0,08–0,1	0,12	0,14	0,18	0,22
N.3.1	40	35	0,1–0,12	0,14	0,18	0,20	0,24
N.3.2	40	35	0,1–0,12	0,14	0,18	0,20	0,24
N.3.3	40	35	0,1–0,12	0,14	0,18	0,20	0,24
N.4.1	69	60	0,1–0,13	0,16	0,20	0,23	0,26
S.1.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.1.2	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.2.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.2.2	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.2.3	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.3.1	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.3.2	9	8	0,04–0,05	0,06	0,07	0,08	0,09
S.3.3	9	8	0,04–0,05	0,06	0,07	0,08	0,09
H.1.1	4		0,04–0,05	0,06	0,07	0,08	0,10
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1	4		0,04–0,05	0,06	0,07	0,08	0,10
O.1.1	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.1.2	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.2.1	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.2.2	40	35	0,1–0,12	0,14	0,18	0,20	0,24
O.3.1							

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

REAMAX TS – Assembly instructions

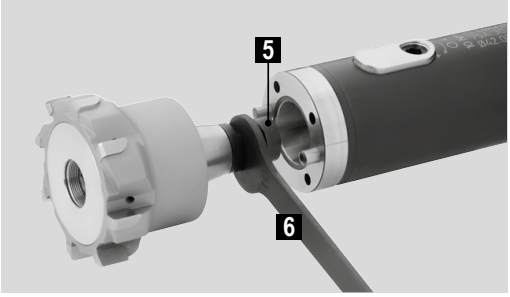

Clean the Morse taper adapter/face contact → grease-free.
Screw the pull stud (5) into the reaming head and tighten using the open-ended spanner (6).

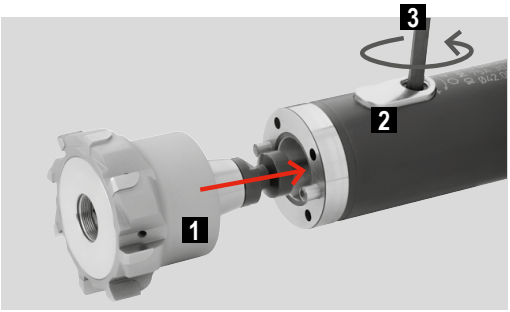

Use key (3) to open jaws (2), but do not fully release, and insert reaming head (1).

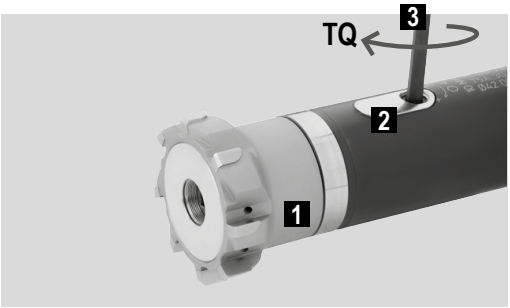

Use the key (3) to close the jaws (2), observe the recommended tightening torque.
When inserting the reaming head (1), this is pulled into its final position when the jaws (2) are closed.

Ø Range	Tightening torque (TQ)
18,000 – 19,999	1,5 Nm
20,000 – 21,999	2,5 Nm
22,000 – 26,999	4 Nm
27,000 – 34,999	5 Nm
35,000 – 41,999	6 Nm
42,000 – 51,999	10 Nm
52,000 – 65,000	13 Nm

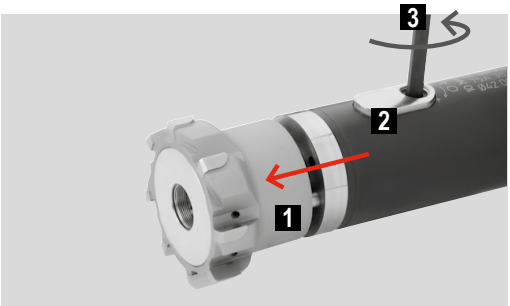

When removing the reamer head (1), this is pressed out of its position by the jaws (2) and can thus be easily removed from the holder:
Use key (3) to open the jaws (2) but do not fully release, and remove reamer head (1).

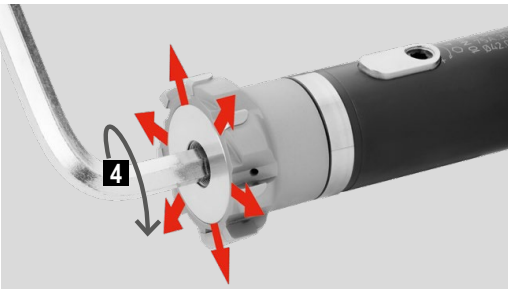

Adjustment for wear compensation:
The smallest drilling tolerances up to IT4 can be achieved through adjustment with the hex key (4).

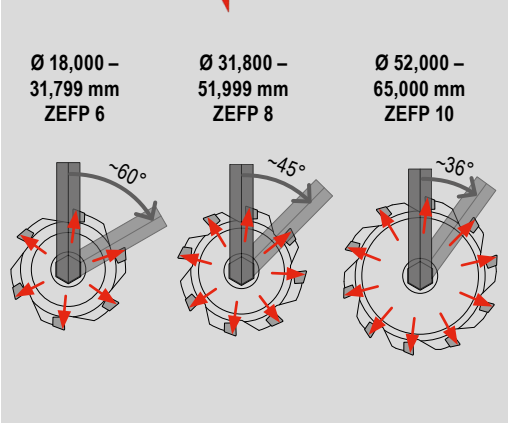

ZEFP = Number of effective cutting edges, around the periphery	ZEFP 6		ZEFP 8		ZEFP 10	
Pitch	~ 60°		~ 45°		~ 36°	
Turning the hex key by ~ ...°, results in an adjustment of ~ ... mm in diameter	~ 15°	~ 0,006 mm in the Ø	~ 15°	~ 0,003 mm in the Ø	~ 18°	~ 0,005 mm in the Ø
	~ 30°	~ 0,012 mm in the Ø	~ 30°	~ 0,006 mm in the Ø	~ 36°	~ 0,010 mm in the Ø
	~ 45°	~ 0,018 mm in the Ø	~ 45°	~ 0,009 mm in the Ø		
	~ 60°	~ 0,024 mm in the Ø				

Caution: For technical reasons, all REAMAX TS reaming heads and Monomax reamers have an irregular cutting edge pitch. For this reason, the angles specified above are approximate values, to make handling easier.
If the required diameter is over turned, turning back the adjustment screw is not enough! If this occurs, the reaming head/reamer must be fully released and re-set again.
This adjustment facility is only intended to compensate for wear. Therefore, an adjustment of 0.015 mm in diameter should not normally be exceeded!
The adjustment values given above are recommended values based on empirical values and test results. However, these may vary slightly from case to case.

REAMAX TS – Operating instructions

Aligning the DAH Zero holder

The tool is recommended for radial alignment of max. 20 µm.

1. Loosen all adjustment screws and pre-load with 1 Nm (new tools are already supplied like this).
2. Place dial gauge with µm display on the ground bezel diameter.
3. Turn the tool to determine the point with the largest runout error using the dial gauge.
4. Adjust the corresponding adjustment screw with the hex key clockwise (1) until half the runout error has been corrected. In doing so, over-tighten by approx. 5 µm.
5. Release the opposite adjustment screw (2) by the over-tightened amount.
6. Adjust all 4 adjustment screws until the runout is < 2 µm.

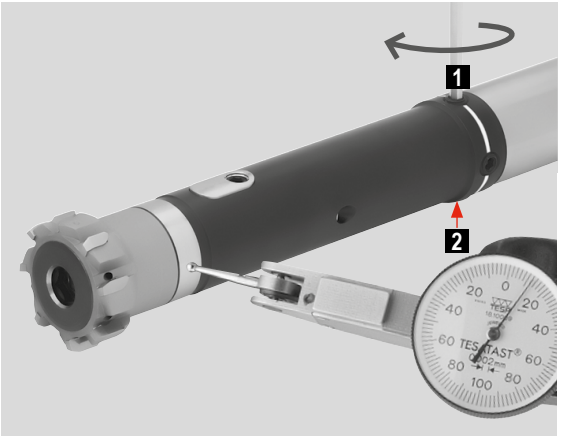

Please note:
- ▲ The runout must be checked and if necessary re-aligned after an adapter changeover, change of application, after any adjustment for wear compensation and before every re-commissioning, using adjustment steps 1 to 6
- ▲ Adjustment screws must always be tightened during usage with at least 1 Nm
- ▲ The max. re-adjustment torque is 4.5 Nm

Please note:
- ▲ Both measurement cutting edges are marked on the reaming head by a dot. Please use only this pair of cutting edges for mechanical measurement. Using other pairs of cutting edges will result in measurement errors.
- ▲ Measure the diameter at the front on the cutting edge due to back taper (see diagram)
- ▲ Please also avoid damage to the cutting edges during the measurement process.

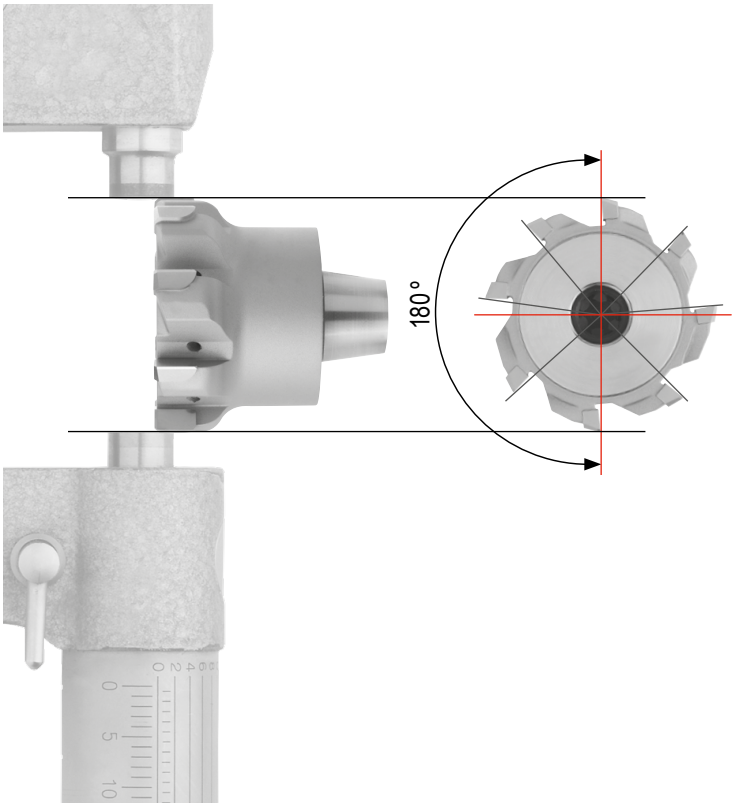

Problems / possible causes / solutions



Hole too large

- ▲ Runout error for reamer in the spindle → use DAH compensation system and correct runout
- ▲ Inaccurate alignment, reamer back-cuts → correct alignment and use DPS floating holder
- ▲ Built-up edge → reduce cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material or increase the oil content of the coolant
- ▲ Reamer too large → have reamer adapted



Hole too small

- ▲ Worn reamer → have reamer adjusted, replaced or repaired
- ▲ Reaming allowance too small → increase reaming allowance
- ▲ Cutting force too high → reduce feed or select other lead geometry (ASG)
- ▲ Reamer too small → have reamer adjusted, replaced or repaired



Conical hole, tapered backwards

- ▲ Inaccurate alignment → correct alignment and use DPS floating holder
- ▲ Misalignment between headstock and turret → correct turret and use DPS floating holder



Conical hole, tapered forwards

- ▲ Poor alignment, cutting edges push initially → correct alignment and use DPS floating holder



Hole is not round

- ▲ Reamer runout error too large → correct the runout with DAH compensation system
- ▲ Alignment error → correct alignment error and use DPS floating holder
- ▲ Asymmetric initial cutting through angled entry surface → countersink hole
- ▲ Workpiece tensioning → correct clamping of the workpieces
- ▲ Poor pre-machining → optimise pre-machining
- ▲ Feed too high → reduce feed



Hole exhibits chatter marks

- ▲ Cutting speed v_c too high → reduce cutting speed
- ▲ L to D ratio too high→ reduce the speed of entry, pilot the bore or select other lead geometry (ASG)



Non clean-up

- ▲ Built-up edge → reduce cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material or increase the oil content of the coolant
- ▲ Cutting edge worn→ have cutting edge repaired or replace the tool
- ▲ Reamer runout error → correct the runout with DAH compensation system
- ▲ No or insufficient cooling, chips are getting trapped → use thro' coolant supply and increase coolant pressure
- ▲ Unsuitable coolant → increase the oil content of the coolant
- ▲ Incorrect cutting data→ use data according to catalogue recommendation



Grooves in the hole "Feed marking"

- ▲ Faulty cutting edge (edge breakage) → have reamer replaced or repaired
- ▲ Built-up edges → reduce cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material or increase the oil content of the coolant



Grooves in the hole "Retraction marking"

- ▲ Cutting edges moved too far out of the hole → move no more than lead length + 2 mm out of the hole
- ▲ Material springs back → do not retract at high speed but with increased (2-3 times) feed rate

Types of wear



Wear on clearance face

Reduce the cutting speed and select a more wear resistant cutting material or coating.



Cutting edge breakage

Reduce feed and reaming allowance. In the case of interrupted holes, use coated carbide instead of DST.



Cratering

Reduce the cutting speed and use a positive cutting edge geometry.



Edge breakages

Increase the cutting speed and use larger rake angle.



Notch wear

Reduce the cutting speed and select a more wear resistant cutting material or coating.



Fatigue fracture

Reduce feed, increase reamer stability.



Built-up edge

Use positive cutting edge geometry, increase the oil content of the coolant, reduce the cutting speed v_c for uncoated carbide cutting material, increase it for DST and coated cutting material.



Cracks at right angles to the cutting edge

Use sufficient coolant and thro' coolant, reduce the cutting speed.

Common cutting edge geometries in the performance area

REAMAX, REAMAX TS, Monomax

Standard geometries

Cutting edge geometry	Flute type	Chip flow	Lead angle
Through hole			
ASG4000	straight	←	
Through hole-Blind hole			
ASG3000	straight	↔	
ASG0706	straight	↔	
ASG0106	straight	↔	

Special geometries

Cutting edge geometry	Flute type	Chip flow Comments	Lead angle
ASG0703	straight	Leading edge	
ASG0704	straight	Leading edge with increased positional accuracy	
ASG09B	straight	Swarf control < Ø 32 mm	
ASG1402	straight	Swarf control > Ø 32 mm	
ASG02	straight	↔	
ASG03	straight	↔	
ASG05	left-handed		

Fullmax

Standard geometries

Cutting edge geometry	Flute type	Chip flow	Lead angle
Through hole			
ASG2210	left-hand helix	←	
ASG2231	left-hand helix	←	
ASG2270	straight	←	
Blind hole			
ASG2110	straight	→	
ASG2131	straight	→	
ASG2170	straight	→	
Through hole-Blind hole			
ASG2350	straight	↔	
ASG2360	straight	↔	

Numerous other cutting edge geometries, especially for your application, are available on request. Simply contact our technicians or use the form „Semi standard – Solid carbide reamer“ on our homepage in the download area.

Achievable surface quality

		Roughness ▸	N11	N10	N9	N8		N7	N6		N5	N4	N3	N2	N1
		Average roughness R_a ▸	25	12,5	6,3	3,2		1,6	0,8		0,4	0,2	0,1	0,05	0,025
		Surface roughness R_z ▸	100	63	40	25	16	10	6,3	4	2,5	1,6	1	0,63	0,25
Material group	P	1.0 – 4.2													
	M	1.1 – 3.1													
	K	1.1 + 2.1 + 3.1													
		1.2 + 2.2 + 3.2													
	N	1.1 – 2.3													
		3.1 – 3.3													
	S	1.1 – 3.3													
	H	1.1 – 1.3													

reachable conditionally reachable

This information is based on experience and may vary from case to case, depending on the prevailing conditions.
(all other surface values on request)

Tolerance classes covered with 1/100 reamer

The most common tolerance is H7, so most reamers configured for an H7 fit tolerance.
With the 1/100 reamers, increments of 0.01 mm can be covered, but are also suitable for various other dimensions.
For example, a 1/100 reamer diameter 8.02 mm can be used for a 8.0 fit F7.
Other fit sizes shown in the table.

Tolerance zone	Nominal Ø in mm											
	1,0	2,0	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0	11,0	12,0
A9				4,29	5,29	6,29	7,30	8,30	9,30	10,30	11,32	12,32
A11	1,31	2,31	3,31	4,32	5,32	6,32	7,35	8,35	9,35	10,35	11,37	12,37
B8				4,15	5,15	6,15	7,16	8,16	9,16	10,16		
B9				4,16	5,16	6,16	7,17	8,17	9,17	10,17	11,18	12,18
B10	1,17	2,17	3,17	4,17	5,17	6,17	7,19	8,19	9,19	10,19	11,20	12,20
B11	1,18	2,18	3,18	4,19	5,19	6,19	7,22	8,22	9,22	10,22	11,23	12,23
C8				4,08	5,08	6,08	7,09	8,09	9,09	10,09	11,11	12,11
C9	1,07	2,07	3,07	4,09	5,09	6,09	7,10	8,10	9,10	10,10	11,12	12,12
C10	1,09	2,09	3,09	4,10	5,10	6,10	7,12	8,12	9,12	10,12	11,14	12,14
C11	1,10	2,10	3,10	4,12	5,12	6,12	7,15	8,15	9,15	10,15	11,18	12,18
D7											11,06	12,06
D8				4,04	5,04	6,04	7,05	8,05	9,05	10,05	11,06	12,06
D9				4,05	5,05	6,05	7,06	8,06	9,06	10,06	11,08	12,08
D10	1,05	2,05	3,05	4,06	5,06	6,06	7,08	8,08	9,08	10,08	11,10	12,10
D11	1,06	2,06	3,06	4,08	5,08	6,08	7,10	8,10	9,10	10,10	11,13	12,13
E7							7,03	8,03	9,03	10,03	11,04	12,04
E8	1,02	2,02	3,02	4,03	5,03	6,03	7,04	8,04	9,04	10,04	11,05	12,05
E9	1,03	2,03	3,03	4,04	5,04	6,04	7,05	8,05	9,05	10,05	11,06	12,06
F7	1,01	2,01	3,01				7,02	8,02	9,02	10,02	11,02	12,02
F8	1,01	2,01	3,01	4,02	5,02	6,02	7,02	8,02	9,02	10,02	11,03	12,03
F9	1,02	2,02	3,02	4,03	5,03	6,03	7,03	8,03	9,03	10,03	11,04	12,04
F10				4,04	5,04	6,04	7,05	8,05	9,05	10,05	11,07	12,07
G7				4,01	5,01	6,01	7,01	8,01	9,01	10,01		
H7										10,01	11,01	12,01
H8				4,01	5,01	6,01	7,01	8,01	9,01	10,01	11,02	12,02
H9	1,01	2,01	3,01	4,02	5,02	6,02	7,02	8,02	9,02	10,02	11,03	12,03
H10	1,03	2,03	3,03	4,03	5,03	6,03	7,04	8,04	9,04	10,04	11,05	12,05
H11	1,04	2,04	3,04	4,05	5,05	6,05	7,06	8,06	9,06	10,06	11,08	12,08
H12	1,07	2,07	3,07	4,08	5,08	6,08	7,10	8,10	9,10	10,10	11,13	12,13
H13	1,11	2,11	3,11	4,14	5,14	6,14	7,18	8,18	9,18	10,18	11,22	12,22
J6				4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
J7				4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
J8	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
JS7				4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
JS8	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00
JS9	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	11,01	12,01
K8	0,99	1,99	2,99				6,99	7,99	8,99	9,99	10,99	11,99
M6							6,99	7,99	8,99	9,99	10,99	11,99
M7							6,99	7,99	8,99	9,99	10,99	11,99
M8	0,99	1,99	2,99	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,99	11,99
N6				3,99	4,99	5,99						
N7	0,99	1,99	2,99	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,99	11,99
N8	0,99	1,99	2,99	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,98	11,98
N9	0,98	1,98	2,98	3,99	4,99	5,99	6,99	7,99	8,99	9,99	10,98	11,98
N10	0,98	1,98	2,98	3,98	4,94	5,98	6,98	7,98	8,98	9,98	10,98	11,98
N11	0,98	1,98	2,98	3,98	4,94	5,98	6,98	7,98	8,98	9,98	10,97	11,97
P6	0,99	1,99	2,99								10,98	11,98
P7	0,99	1,99	2,99				6,98	7,98	8,98	9,98	10,98	11,98
P8	0,99	1,99	2,99	3,98	4,98	5,98					10,97	11,97
R6							6,98	7,98	8,98	9,98		
R7				3,98	4,98	5,98	6,98	7,98	8,98	9,98	10,97	11,97
S6				3,98	4,98	5,98					10,97	11,97
S7	0,98	1,98	2,98	3,98	4,98	5,98	6,97	7,97	8,97	9,97	10,97	11,97
U6							6,97	7,97	8,97	9,97		
U7				3,97	4,97	5,97	6,97	7,97	8,97	9,97		
X7				3,97	4,97	5,97						
X8	0,97	1,97	2,97				6,96	7,96	8,96	9,96	10,95	11,95
X9	0,97	1,97	2,97	3,96	4,96	5,96	6,95	7,95	8,95	9,95		
Z7	0,97	1,97	2,97	3,96	4,96	5,96	6,96	7,96	8,96	9,96	10,95	11,95
Z8	0,97	1,97	2,97	3,96	4,96	5,96	6,95	7,95	8,95	9,95	10,94	11,94
Z9				3,95	4,95	5,95						
Z10	0,96	1,96	2,96	3,95	4,95	5,95	6,94	7,94	8,94	9,94	10,93	11,93
ZA7	0,96	1,96	2,96	3,95	4,95	5,95	6,94	7,94	8,94	9,94		
ZA8							6,94	7,94	8,94	9,94	10,93	11,93
ZB8	0,95	1,95	2,95	3,94	4,94	5,94					10,90	11,90
ZB9	0,95	1,95	2,95	3,94	4,94	5,94	6,92	7,92	8,92	9,92	10,90	11,90

Manufacturer's tolerance of the reamers

T = Hole tolerance field
D = Manufacturer's tolerance of the reamer

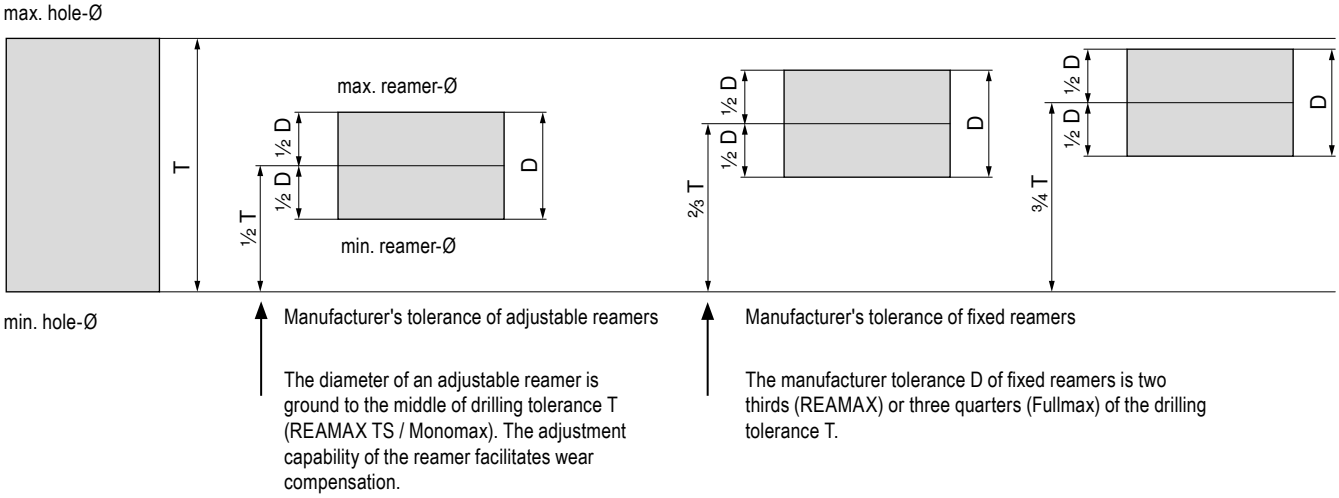

Manufacturer's tolerance of adjustable reamers

The diameter of an adjustable reamer is ground to the middle of drilling tolerance T (REAMAX TS / Monomax). The adjustment capability of the reamer facilitates wear compensation.

Manufacturer's tolerance of fixed reamers

The manufacturer tolerance D of fixed reamers is two thirds (REAMAX) or three quarters (Fullmax) of the drilling tolerance T.

Coatings – Reaming and Countersinking

HPC TiN

- Nanostructured TiN multilayer coating
- Friction-optimised top layer enables process-secure dry hard machining
- Extreme resistance to oxidation and elevated-temperature hardness
- Maximum application temperature: 900 °C

TiN

- TiN coating
- Maximum application temperature: 450 °C

TiAlN

- TiAlN multilayer coating
- Maximum application temperature: 900 °C

TiAlSiN

- TiAlSiN- Multilayer coating
- Maximum application temperature: 800 °C
- Specially designed for machining hardened steels: high hardness and heat resistance with low thermal conductivity.

DBC

- Diamond-like carbon coating
- Specially for machining non-ferrous metals
- Maximum application temperature: 400 °C

DBG-U

- AlTiN Multilayer coating
- Especially for universal use in a variety of materials as well as for the machining of tempered materials < 62 HRC
- For high cutting speeds and suitable for MMS application
- Maximum application temperature: 1000 °C

DBG-P

- AlTiN Multilayer coating
- Especially for universal use in a variety of materials at high cutting speeds
- Suitable for MMS application
- Maximum application temperature: 1000 °C

DBC-N

- Diamond-like ta-C-Multilayer-carbon coating
- Particularly hard and smooth coating and therefore especially for machining non-ferrous metals
- Maximum application temperature: 500 °C

DBQ

- AlCrN-Multilayer-Beschichtung
- Particularly suitable for machining stainless steels and titanium
- Low formation of built-up edges
- Maximum application temperature: > 1000 °C

DBF-A

- AlCrN Multilayer coating
- specially developed for the machining of tempered materials < 62 HRC
- maximum application temperature: > 1100 °C

Grade description – Reamers

DST

- Cermet, uncoated
- ISO | **P15** | **M10** | K10
- The uncoated cermet grade for finish machining stainless and hardened steel
- Particularly wear resistant thanks to high heat resistance

CWC10

- Cermet, uncoated
- ISO | **P15** | **M10** | K10
- The uncoated cermet grade for finish machining of stainless and hardened steel
- Particularly wear-resistant due to high heat resistance

K10

- Carbide, uncoated
- ISO | **K10**
- Uncoated carbide grade for machining grey cast iron or non-ferrous metals, depending on the cutting edge geometry

4

Grade description – Indexable insert countersink

BK8425

- Carbide, TiAlN/TiN-coated
- ISO | **P25** | **M25** | **K25**
- Universal grade with greater wear resistance thanks to innovative PVD multi-layer coating

K10

- Carbide, uncoated
- ISO | **K10**
- Uncoated carbide grade for machining grey cast iron or non-ferrous metals, depending on the cutting edge geometry

Chip breakers

-01

- Rake angle 12°
- All-round topography chamfered, rounded
- Very smooth-cutting thanks to positive cutting edge geometry
- Also suitable for less-powerful machines and unstable workpieces
- Easily controllable chip formation also in less solid materials

-U877

- Rake angle 6°
- circumferentially ground
- Three-ground chip breaker with second clearance angle for clearance with small tool diameters

-G06

- Rake angle 6°
- For P / M / K materials
- High stability due to significant wedge angle

-G12

- Rake angle 12°
- For P / N / S materials
- Extremely smooth-cutting thanks to positive cutting edge geometry
- Extremely suitable for less-powerful machines and unstable workpieces
- Easily controllable chip formation also in less solid materials

Adapters which are ideal for reaming operations (such as the DAH compensation holder) can be found in the → **Clamping technology catalogue, Chapter 16**

New products for machining technicians

NEW Precision adjustment head hi.flex micro

▲ The continuation of the hi.flex system success story: the ultimate milestone in terms of precision, flexibility and user-friendliness is now getting a well-deserved "little brother". With a boring range of Ø 0.5 mm – 60 mm, it covers a very wide range of all upcoming spindle machining operations.

→ Page 19–21

NEW UltraMini/EcoCut boring bar adapter

▲ The new boring bar adapter can be used in all heads with a clamping diameter of 12 mm or 16 mm such as both sizes of the hi.flex micro precision adjustment head (and BluFlex 2). Using the UltraMini and EcoCut boring bars makes particular sense here since the adapter is also suitable for boring bars with a thro' coolant supply.

DCONMS 12 → Page 20
DCONMS 16 → Page 14

NEW MicroKom – Precision spindle set

▲ New: the MicroKom precision adjustment heads BluFlex 2, hi.flex and hi.flex micro are also available as a set

BluFlex 2 → Page 12
hi.flex → Page 13
hi.flex micro → Page 19

NEW Interface adapter

▲ Total freedom in tool selection: thanks to the new interface adapters, ABS tools in STM base holders and STM tools in ABS base holders can be accommodated reliably and precisely.

→ Page 56

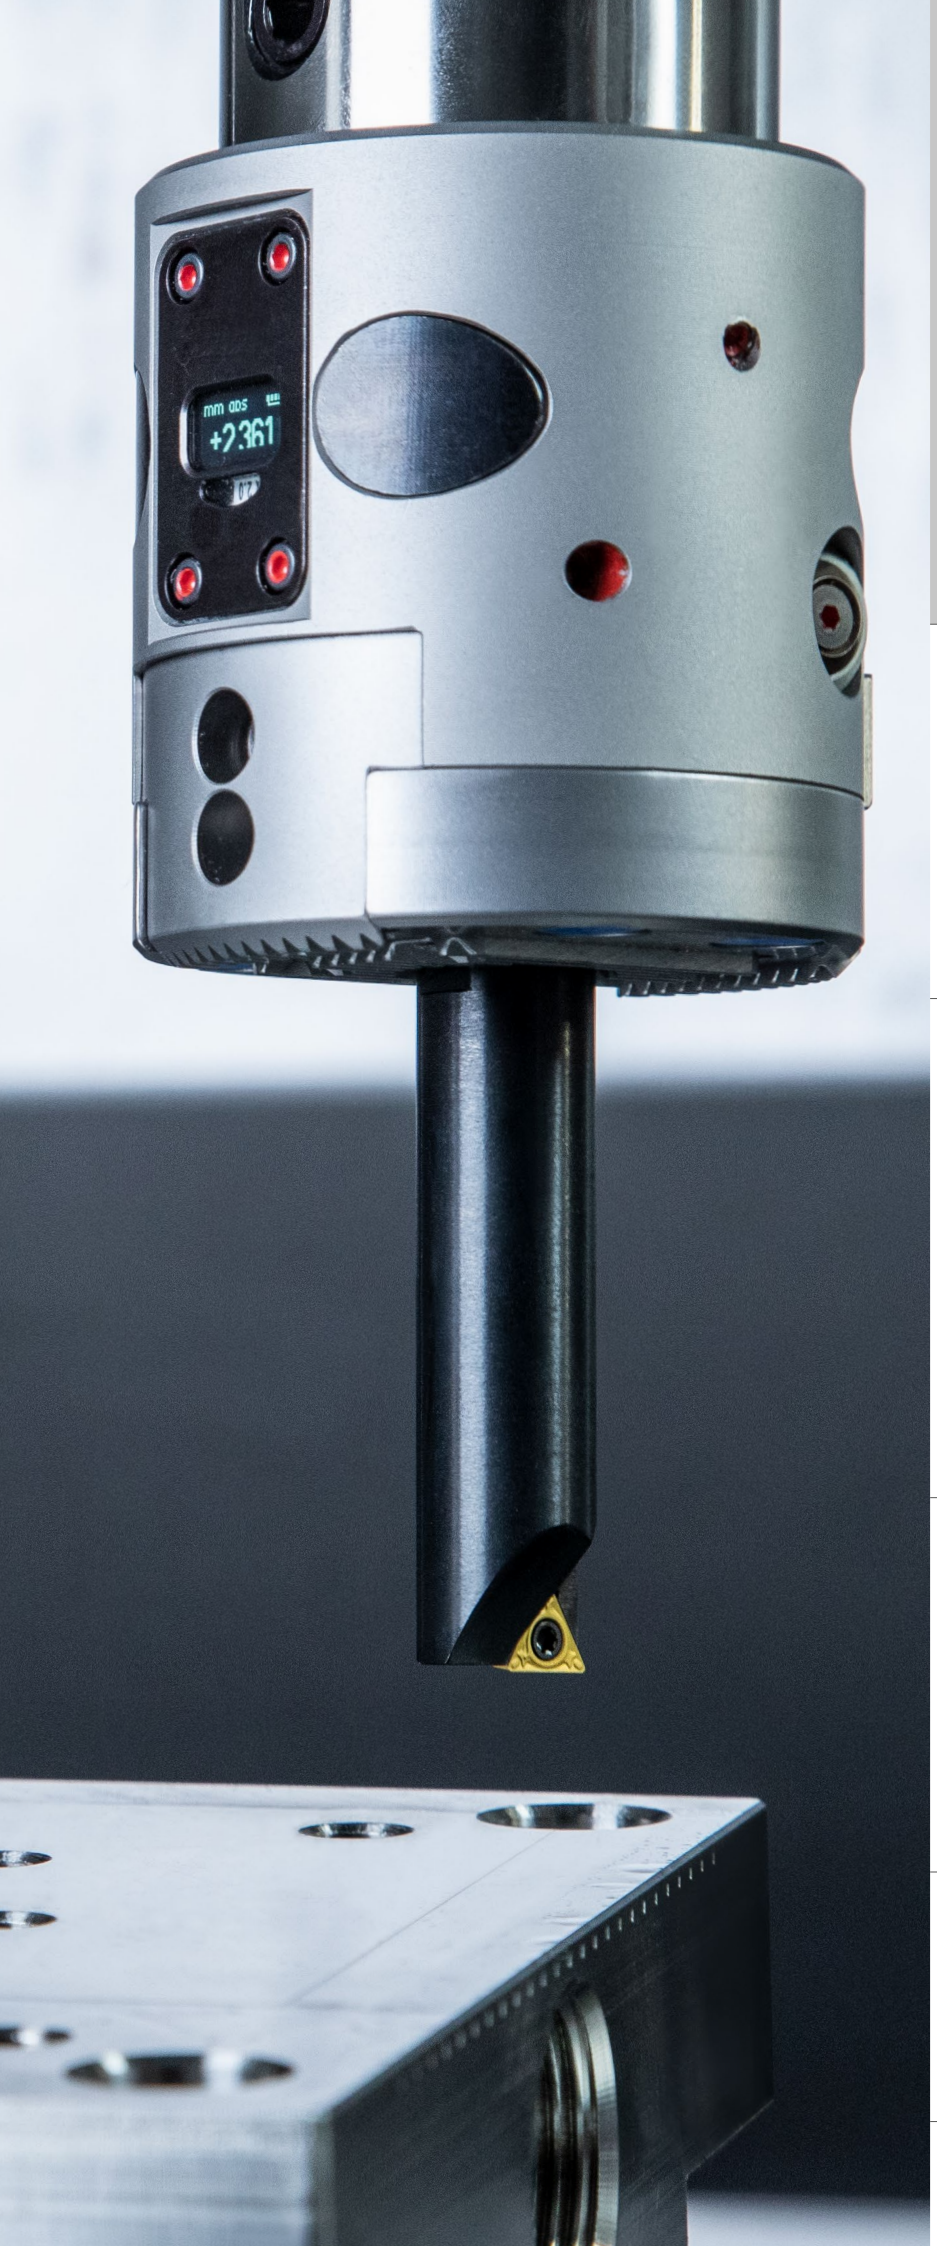

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling 5

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Toolfinder	5–10
Contents Overview Accessories	11
Product programme	12–63
Cutting Data	64–71
Technical Information	
Fine boring tools	72+73
Counterboring tools	74
Insert	75
Notes on drilling technology	76
Problems / possible causes / solutions	77
Types of wear	78
Chip breakers	79
Grades / coatings	80+81

KOMET \ Performance

Premium quality tools for high performance.

The premium quality tools from the **KOMET Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

KOMET \ Standard

Quality tools for standard applications.

The quality tools of the **KOMET Standard** product line are high quality, high performance, reliable and enjoy the highest level of trust among our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

F Fine Machining

M Medium Machining

R Rough Machining

Smooth cut

Irregular cutting depth

Interrupted cut

ABS **KOMET ABS** – modular coupling system for rotating and stationary tools

STM Modular SpinTools interface

ER 32 System-independent ER 32 interface

Coolant supply central
Steep taper Form AD

hi.flex / hi.flex micro

- ▲ The precision adjustment heads are characterised by their high precision, absolute reliability and enormous flexibility
- ▲ Available as analogue and digital variants (hi.flex: analogue + digital, hi.flex micro: analogue)
- ▲ Comprehensive accessories offer maximum flexibility (hi.flex: diameter range 0.5 – 365 mm, hi.flex micro: diameter range 0.5 – 60 mm)
- ▲ Higher RPMs can be reached thanks to the symmetrically balanced design (hi.flex: 17,500 rpm, hi.flex micro: 30,000 rpm)
- ▲ The sensitive adjustment for µ-precise width of cut
- ▲ With thro' coolant supply
- ▲ Universal ABS interface

Toolfinder

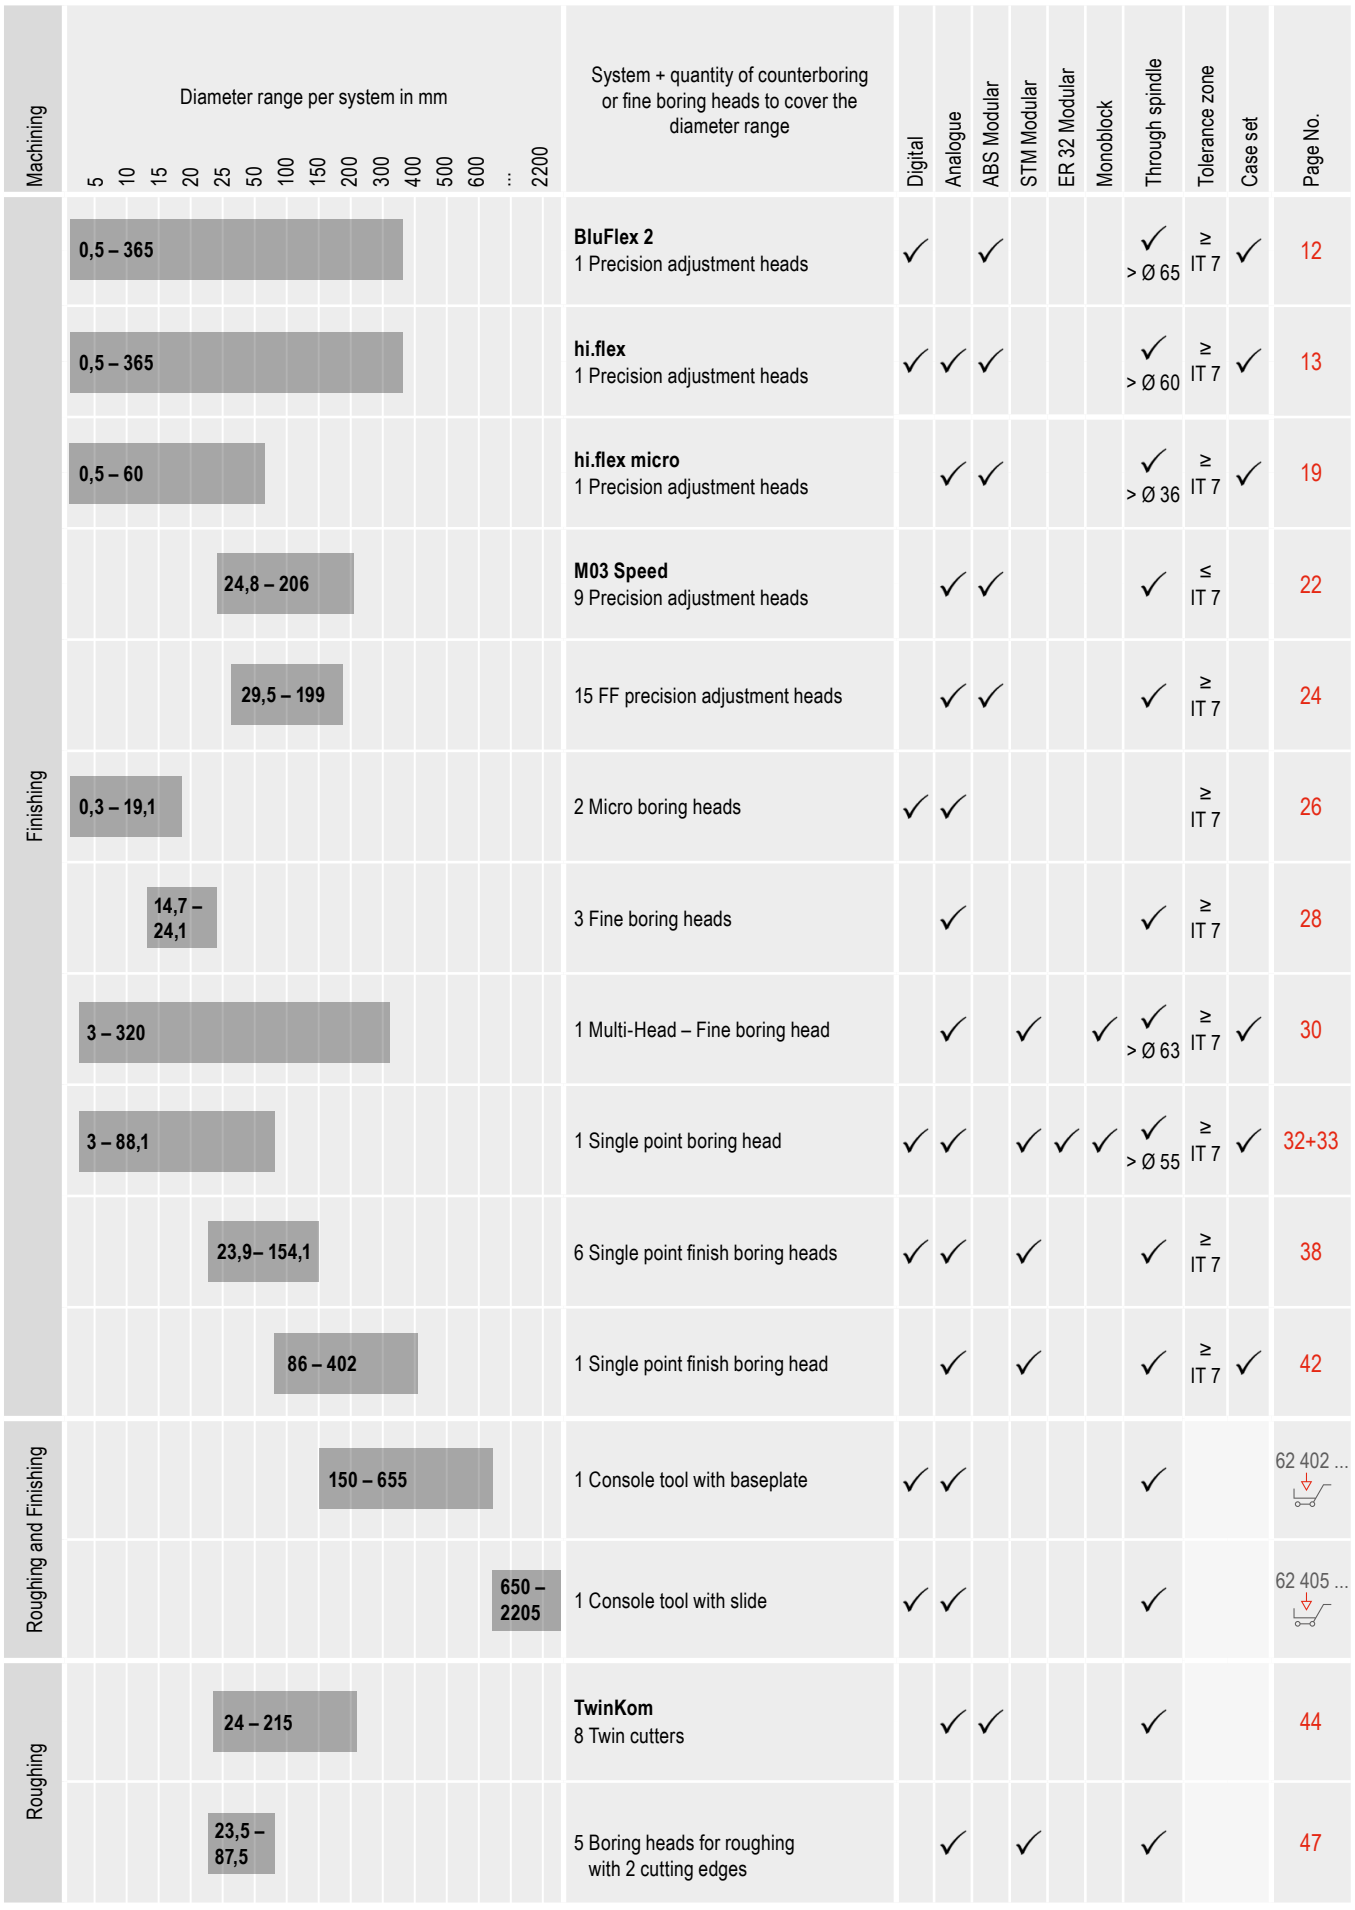

System + quantity of counterboring or fine boring heads to cover the diameter range	Digital	Analogue	ABS Modular	STM Modular	ER 32 Modular	Monoblock	Through spindle	Tolerance zone	Case set	Page No.
BluFlex 2 1 Precision adjustment heads	✓		✓				✓ > Ø 65	≥ IT 7	✓	12
hi.flex 1 Precision adjustment heads	✓	✓	✓				✓ > Ø 60	≥ IT 7	✓	13
hi.flex micro 1 Precision adjustment heads		✓	✓				✓ > Ø 36	≥ IT 7	✓	19
M03 Speed 9 Precision adjustment heads		✓	✓				✓	≤ IT 7		22
15 FF precision adjustment heads		✓	✓				✓	≥ IT 7		24
2 Micro boring heads	✓	✓						≥ IT 7		26
3 Fine boring heads		✓					✓	≥ IT 7		28
1 Multi-Head – Fine boring head		✓		✓		✓	✓ > Ø 63	≥ IT 7	✓	30
1 Single point boring head	✓	✓		✓	✓	✓	✓ > Ø 55	≥ IT 7	✓	32+33
6 Single point finish boring heads	✓	✓		✓			✓	≥ IT 7		38
1 Single point finish boring head		✓		✓			✓	≥ IT 7	✓	42
1 Console tool with baseplate	✓	✓					✓			62 402 ...
1 Console tool with slide	✓	✓					✓			62 405 ...
TwinKom 8 Twin cutters		✓	✓				✓			44
5 Boring heads for roughing with 2 cutting edges		✓		✓			✓			47

This article can be found in our online shop at cuttingtools.ceratizit.com

Overview – Fine boring systems

MicroKom

BluFlex 2 / hi.flex

Ø 0,5 – 365 mm

ABS

BluFlex 2

Digital
12

hi.flex

Analogue / digital
13

Ø 0,5 – 26 mm

- **Ø 0,5 – 8 mm** → UltraMini + EcoCut → Chapters 10 + 12 → Adapter 14
- **Ø 5,6 – 24 mm** → Boring Bar 18 → Adapter 17
- **Ø 5,6 – 11 mm** → Boring bar, vibration-optimised 17 → Adapter 17
- **Ø 13 – 26 mm** → Boring bar 17
- **Ø 6 – 22 mm *** → Steel boring bar 14
- **Ø 7,9 – 23,9 mm** → ABS32 boring bar 18

Ø 25 – 365 mm

- **Ø 25 – 44 mm** → Insert holder 15 → Serrated body 15
- **Ø 44 – 63 mm** → Insert holder 15 → Serrated body 15
- **Ø 63 – 93 mm** → Insert holder 15 → Filling piece 16
- **Ø 90 – 365 mm** → Insert holder 15 → Bridge 16 → Filling piece 16
- **Ø 5 – 70 mm** → Spindle tool for external machining 16

hi.flex micro

Ø 0,5 – 60 mm

ABS



Analogue
19

Ø 0,5 – 25 mm

- **Ø 0,5 – 8 mm** → UltraMini + EcoCut → Chapters 10 + 12 → Adapter 20
- **Ø 8 – 13,8 mm** → Boring Bar 20
- **Ø 13,8 – 19,8 mm** → Boring Bar 20
- **Ø 19,8 – 25 mm** → Boring Bar 20

Ø 25 – 60 mm

- **Ø 25 – 44,8 mm** → Insert holder 21 → Serrated body 21
- **Ø 44,8 – 60 mm** → Insert holder 21 → Filling piece 21

TO.X
58+59

WOHX *
57

* Used for steel boring bars Ø 6 – 8 mm

necessary
optional

5

SpinTools

Multi-Head boring and fine boring head

Ø 3 – 320 mm

HSK-A | SK | MAS BT | STM



Analogue
30

Ø 3 – 53,1 mm

Ø 3 – 12 mm

Boring steel
35

Ø 5,8 – 13,2 mm

Boring bar
36

Reduction sleeve
36

Ø 8,75 – 40,1 mm

High-speed boring head + boring shank
37

Ø 9,75 – 53,1 mm

Steel boring bar
35

Boring tool extension
36

Ø 29,75 – 320 mm

Ø 29,75 – 88,1 mm



Insert holder
35

Adjustable boring bar
35

Ø 86 – 320 mm

Counterweight
31

Bridge
31

Insert holder
31

Single point finish boring head

Ø 3 – 88,1 mm

HSK-A | SK | MAS BT | STM | ER 32



Analogue / digital
32+33

Ø 3 – 53,1 mm

Ø 3 – 12 mm

Boring steel
35

Ø 5,8 – 13,2 mm

Boring bar
36

Reduction sleeve
36

Ø 8,75 – 40,1 mm

High-speed boring head + boring shank
37

Ø 9,75 – 53,1 mm

Steel boring bar
35

Boring tool extension
36

Ø 29,75 – 88,1 mm

Ø 29,75 – 88,1 mm



Insert holder
35

Adjustable boring bar
35

Micro Boring Head

Ø 0,3 – 19,1 mm



Analogue / digital
26

Ø 0,3 – 19,1 mm

Ø 0,3 – 7,1 mm



Solid carbide cutting insert
27

Adapter
27

Ø 5,2 – 8,1 mm

Solid carbide cutting insert
27

Ø 6,9 – 19,1 mm

Solid carbide insert
27

Tool holder
27

CC..
63

Overview – Fine boring tools

MicroKom

M03 Speed
Analogue

Ø 24,8 – 206 mm

ABS

Ø 24,8 – 39 mm

Precision adjustment heads
22

Insert holder
23

Ø 38 – 103 mm

Precision adjustment heads
22

Insert holder
23

Ø 38 – 206 mm

Interchangeable bridge
23



Precision adjustment heads
22



Insert holder
23

FF precision adjustment head
Analogue

Ø 29,5 –199 mm

ABS

Precision adjustment heads
24



Precision turning insert
25

TO.X
58+59

necessary
optional

SpinTools

Single point finish boring head
Analogue / digital

Ø 23,9 – 154,1 mm

STM

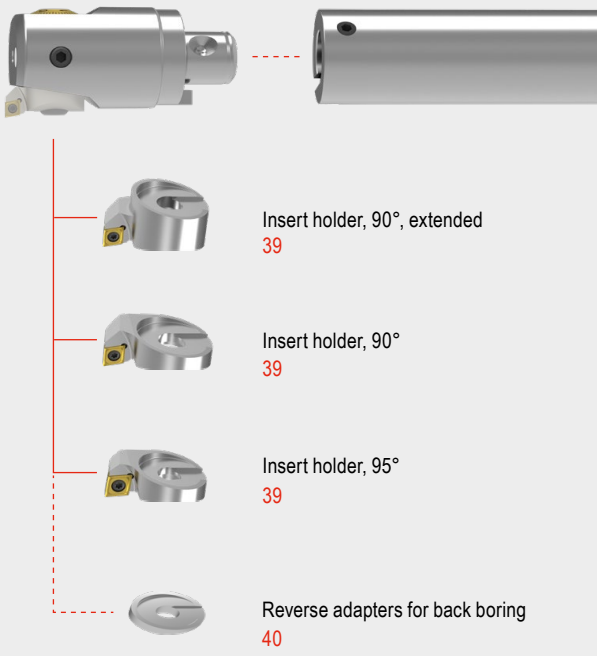

Ø 86 – 402 mm

STM

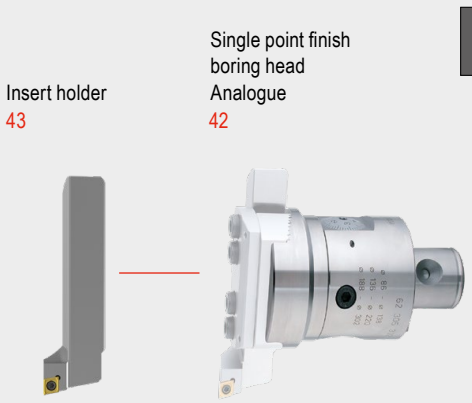

Fine boring head
Analogue

Ø 14,7 – 24,1 mm

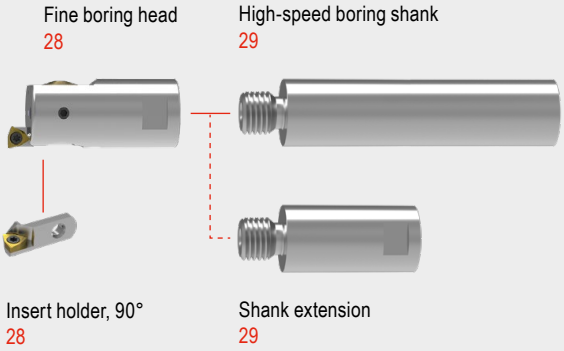

CC..
63

WC..
62

Overview – Counterboring and console tools

necessary
optional

TwinKom

Twin cutter
Analogue

Ø 24 – 215 mm

Tool holder 90° radially adjustable
45

Tool holder 80° radially adjustable
45

Basic tool holder, radially + axially adjustable
46

Indexable insert 90°
46

Indexable insert 80°
46

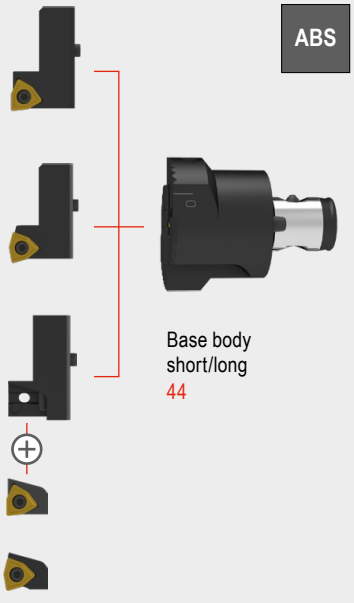

ABS

Base body short/long
44

WO..
60+61

SpinTools

Twin rough boring head
Analogue

Ø 23,5 – 87,5 mm

Pair of insert holders, Standard 90°
48

Pair of insert holders, Standard 70°
48

Pair of insert holders, Synchro 90°
49

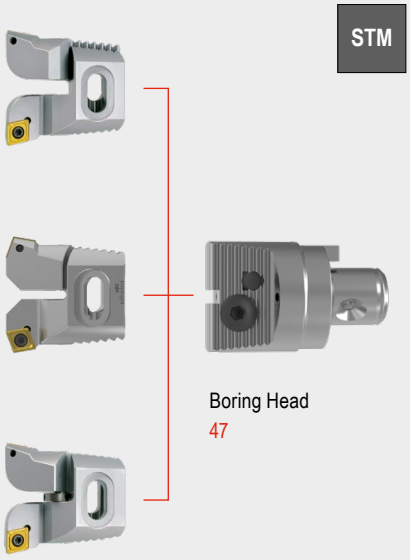

STM

Boring Head
47

CC.. / CN..
63

SpinTools

Console tool
Analogue / digital

Ø 150 – 2205 mm

Rough boring block 90° (CC..)
62 412 ...

Rough boring block 90° (CN..)
62 413 ...

Rough boring block 70° (CN..)
62 414 ...

Finish boring block analogue / digital
62 410 ... / 62 409 ...

Insert holder 90° / 95°
62 318 ... / 62 320 ...

Counterweight
62 427 ...

Ø 150 – 655 mm

Base plates
62 402 ...

Ø 650 – 2205 mm
Elongation console



Slide
62 406 ...

Basis
62 405 ...



Base adapter
62 392 ...

HSK-A
SK
MAS BT

Ø 60 mm
DIN 6357



SK
MAS BT

Overview of base adapters and accessories

System			ISO 7388-1		ISO 7388-2		ISO 12164		ISO 26623-1
			SK	SK-FC	MAS-BT	MAS-BT-FC	HSK-A	HSK-E	PSC
Base adapter		ABS	→ Clamping technology catalogue, Chapter 16, Adapters and accessories						
			16|43	16|45	16|88	16|108	16|141		16|170
		STM	50		51		52		

5

Accessories

Extension		ABS	→ Clamping technology catalogue, Chapter 16, Adapters and accessories						
			16|187						
		STM	55						
Reduction		ABS	→ Clamping technology catalogue, Chapter 16, Adapters and accessories						
			16|191						
		STM	53						
Interface adapter ABS → STM		ABS	56						
Interface adapter STM → ABS		STM	56						

Additional accessories available on request, such as balancing rings, axial grooving holders (UltraMini) and counterboring insert holders (0.4 mm offset) for SpinTools systems.

MicroKom – BluFlex 2 – precision adjustment head

▲ Via the free app (Android/iOS), an extended display can be transferred to a standard smartphone (62 840 16097)
▲ For MicroKom boring bars with Ø 16 or with ABS 32, MicroKom bridges, and serrated body
▲ With thro' coolant supply
▲ LSCX = Recess depth of boring bar

Scope of supply:
incl. Battery

ABS

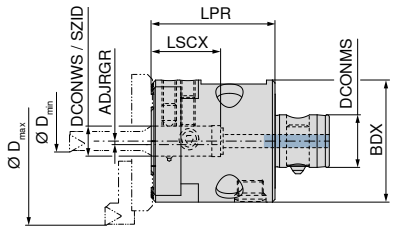

D_{min} - D_{max} mm	KOMET no.	Adapter	DCONWS mm	SZID	DCONMS mm	BDX mm	LPR mm	LSCX mm	ADJRGR mm	WT kg	without Bluetooth 62 820 ... EUR W4/6A		with Bluetooth 62 840 ... EUR W4/6A	
0,5 - 365	M04 30100	ABS 50	16	ABS 32	28	65	71	38	-0,2 - 2,3	1,45	2.765,00	16097		
0,5 - 365	M04 30000	ABS 50	16	ABS 32	28	65	71	38	-0,2 - 2,3	1,45			2.765,00	16097

Clamping screw

Clamping screw

Clamping screw

Clamping sleeve

Battery cover

Spare parts for Article no.		62 950 ... EUR XX		62 950 ... EUR W7/6B		62 950 ... EUR W7/6B		62 950 ... EUR W7/6B		62 950 ... EUR W7/6B	
62 820 16097	M8x1x12/SW4	12,08	13989	M8x1x20/SW4	2,03	13700	M5x14/SW4	2,94	18600	8,46	18500	11,29	18400
62 840 16097	M8x1x12/SW4	12,08	13989	M8x1x20/SW4	2,03	13700	M5x14/SW4	2,94	18600	8,46	18500	11,29	18400

A detailed operating manual is available for download in the online shop next to the product.

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

→ **Page 6**
Here you will find a detailed system overview.

MicroKom – Precision spindle set BluFlex 2

Scope of supply:

NEW

▲ **1 plastic case**
▲ **1 precision adjustment head**
▲ **5 boring bars**
– 62 850 00600 Ø 6 mm
– 62 850 01000 Ø 10 mm
– 62 850 01400 Ø 14 mm
– 62 850 01800 Ø 18 mm
– 62 850 02200 Ø 22 mm
▲ **2 insert holders**
– 62 863 04400 Ø 25 – Ø 44 mm
– 62 863 12500 Ø 44 – Ø 63 mm (– Ø 125 mm)
▲ **1 bridge**
– 62 860 12500 Ø 90 – Ø 125 mm
▲ **1 serrated body**
– 62 861 06300 Ø 25 – Ø 63 mm
▲ **1 filling piece**
– 62 862 09300 Ø 16x35 mm
▲ **10 indexable inserts**
– 2 pieces 62 600 00102 – WOHX02T001EL-G12 BK8440
– 4 pieces 62 601 90206 – TOGX06T102EN-14 BK60
– 4 pieces 62 601 70409 – TOGX090204EN-14 BK60
▲ **5 cylindrical screws**
– 62 950 00000 M5x16 mm
▲ **5 screwdrivers**
– 5IP, 6IP, 8IP, SW3, SW4

D_{min} - D_{max} mm	without Bluetooth 62 820 ... EUR W4/6A		with Bluetooth 62 840 ... EUR W4/6A	
6 - 125	4.217,00	99997	4.217,00	99997

MicroKom – hi.flex – precision adjustment head

▲ For MicroKom boring bars with Ø 16 mm or ABS 32, MicroKom bridges and serrated bodies
▲ With thro' coolant supply
▲ LSCX = Recess depth of boring bar
▲ Digital variant: please order the digital stick separately

ABS

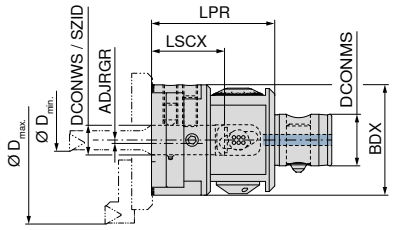

D_{min} - D_{max} mm	KOMET no.	Adapter	DCONWS mm	SZID	DCONMS mm	BDX mm	LPR mm	LSCX mm	ADJRGR mm	WT kg	Analogue 62 800 ... EUR W4/6A		Digital 62 800 ... EUR W4/6A	
0,5 - 365	M05 01000	ABS 50	16	ABS 32	28	60	67	39,7	-0,25 - 5	1,23	1.433,00	**16097**		
0,5 - 365	M04 10040	ABS 50	16	ABS 32	28	60	67	39,7	-0,25 - 5	1,23			1.720,00	**16197**

Clamping screw

Clamping screw

Clamping screw

Spare parts for Article no.		62 950 ... EUR W7/6B			62 950 ... EUR XX			62 950 ... EUR W7/6B	
62 800 16097	M8x8 - SW4	2,03	**14700**	M8x1x12/SW4	12,08	**13989**	M8x1x20/SW4	2,03	**13700**
62 800 16197	M8x8 - SW4	2,03	**14700**	M8x1x12/SW4	12,08	**13989**	M8x1x20/SW4	2,03	**13700**

A detailed operating manual is available for download in the online shop next to the product.

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

→ **Page 6**
Here you will find a detailed system overview.

→ **Page 26**
Here you will find the SpinTools – Digital Stick.

MicroKom – Precision spindle set hi.flex

Scope of supply:

NEW

▲ **1 plastic case**
▲ **1 precision adjustment head**
▲ **5 boring bars**
– 62 850 00600 Ø 6 mm
– 62 850 01000 Ø 10 mm
– 62 850 01400 Ø 14 mm
– 62 850 01800 Ø 18 mm
– 62 850 02200 Ø 22 mm
▲ **2 insert holders**
– 62 863 04400 Ø 25 – Ø 44 mm
– 62 863 12500 Ø 44 – Ø 63 mm (– Ø 125 mm)
▲ **1 bridge**
– 62 860 12500 Ø 90 – Ø 125 mm
▲ **1 serrated body**
– 62 861 06300 Ø 25 – Ø 63 mm
▲ **1 filling piece**
– 62 862 09300 Ø 16x35 mm
▲ **10 indexable inserts**
– 2 pieces 62 600 00102 – WOHX02T001EL-G12 BK8440
– 4 pieces 62 601 90206 – TOGX06T102EN-14 BK60
– 4 pieces 62 601 70409 – TOGX090204EN-14 BK60
▲ **5 cylindrical screws**
– 62 950 00000 M5x16 mm
▲ **5 screwdrivers**
– 5IP, 6IP, 8IP, SW3, SW4

D_{min} - D_{max} mm	Analogue 62 800 ... EUR W4/6A		Digital 62 800 ... EUR W4/6A	
6 - 125	3.068,00	**99997**	3.326,00	**99897**

MicroKom – UltraMini / EcoCut boring bar adapter

▲ for **hi.flex** and **BluFlex 2**
▲ 4 clamping flats (offset by 90°) on Ø DCONMS
▲ with thro' coolant supply



NEW

62 851 ...

DCONWS mm	KOMET no.	OAL mm	BD mm	LFSF mm	LSC mm	DCONMS mm	EUR W4/6A	
4	M05 90950	39	22	14	18	16	152,70	16499
5	M05 90960	39	22	14	18	16	152,70	16599
6	M05 90970	39	22	14	18	16	152,70	16699
7	M05 90980	39	25	14	18	16	152,70	16799
8	M05 90990	39	25	14	18	16	152,70	16899

Clamping screw

70 950 ...

Spare parts DCONWS	EUR 2A/28	
4 - 5	3,84	867
6 - 8	3,84	123

Suitable UltraMini / EcoCut tools can be found in → **Chapters 10 and 12.**

MicroKom – Steel boring bar for hi.flex, BluFlex 2

▲ with thro' coolant



62 850 ...

DCN mm	KOMET no.	OAL mm	LDRED mm	DCONMS mm	Insert	EUR W4/6A	
6	B05 20100	71,7	21,0	16	WO.. 02T0	154,20	00600
8	B05 20120	77,4	28,0	16	TO.. 06T1	159,40	00800
10	B05 20140	81,8	34,0	16	TO.. 0902	152,70	01000
12	B05 20160	88,2	42,0	16	TO.. 0902	166,10	01200
14	B05 20180	94,4	50,0	16	TO.. 0902	164,20	01400
18	B05 20220	100,0	60,0	16	TO.. 0902	174,40	01800
22	B05 20260	108,0	68,5	16	TO.. 1403	199,50	02200

TORX® Screws

62 950 ...

Spare parts Insert	EUR W7/6B	
WO.. 02T0	3,05	11800
TO.. 06T1	3,50	12800
TO.. 0902	3,05	12000
TO.. 1403	3,05	12600

→ **Page 57–59**
Find suitable indexable inserts here.

MicroKom – Serrated body for hi.flex, BluFlex 2

▲ with thro' coolant

Scope of supply:
without insert holder

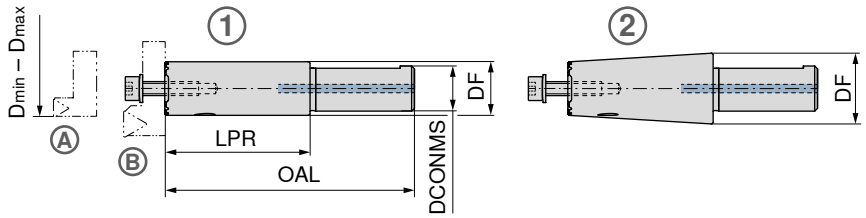

5

D_{min} - D_{max} mm	KOMET no.	DCONMS mm	OAL mm	LPR mm	DF mm	Fig.	62 861 ... EUR W4/6A	
25 - 63	M05 90100	16	89,12	52,12	19	1	181,00	**06300**
25 - 63	M05 90110	16	128,39	91,93	24	2	181,00	**16300**

Cylindrical screw

Disk spring

Spare parts DCONMS		62 950 ... EUR W7/6B			62 950 ... EUR W7/6B	
16	M5x16	1,13	**00000**	10x5,2x0,3	2,03	**19100**

MicroKom – Insert holder for hi.flex, BluFlex 2

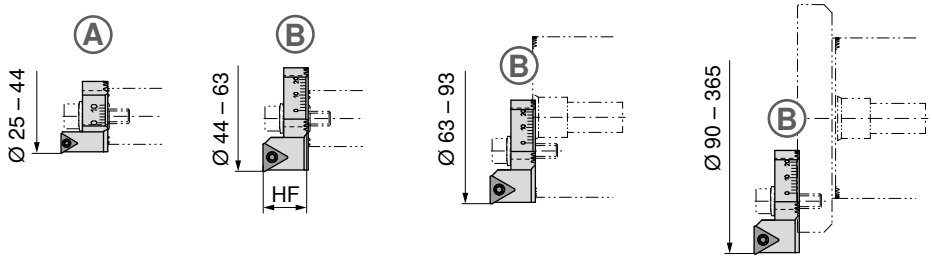

DCN mm	DCX mm	KOMET no.	HF mm	Insert	Fig.	62 863 ... EUR W4/6A	
25	44	M05 20101	13,5	TO.. 06T1	A	177,60	**04400**
44	365	M05 20151	13,5	TO.. 0902	B	181,00	**12500**

TORX® Screws

Spare parts Insert		62 950 ... EUR W7/6B	
TO.. 06T1	M2x4,9/IP6	3,50	**09700**
TO.. 0902	M2,6x6,2 - 08IP	3,05	**09900**

→ **Page 58+59**
Find suitable indexable inserts here.

MicroKom –
Bridge for hi.flex, BluFlex 2



D_{min} - D_{max} mm	KOMET no.	BDX mm	HSUP mm	WT kg	62 860 ... EUR W4/6A	
90 - 125	M05 80101	85	14,89	0,147	249,90	**12500**
120 - 155	M05 80200	115	16,89	0,107	300,40	**15500**
150 - 185	M05 80300	145	18,89	0,152	340,60	**18500**
180 - 215	M05 80400	175	21,89	0,229	378,10	**21500**
210 - 245	M05 80500	205	25,00	0,309	525,60	**24500**
240 - 275	M05 80510	235	25,00	0,349	569,90	**27500**
270 - 305	M05 80520	265	25,00	0,394	589,90	**30500**
300 - 335	M05 80530	295	25,00	0,435	634,20	**33500**
330 - 365	M05 80540	325	25,00	0,478	683,80	**36500**

Cylindrical screw

Disk spring

Spare parts BDX	62 950 ... EUR W7/6B		62 950 ... EUR W7/6B	
85 - 325	1,13	**00000**	2,03	**19100**

MicroKom –
Filling piece for hi.flex, BluFlex 2

▲ For targeted redirecting of the thro' coolant to the cutting edge when using bridges or insert holders with diameters from 63 mm



DCONMS mm	KOMET no.	62 862 ... EUR W4/6A	
16	M05 90501	24,13	**09300**

MicroKom –
Spindle tool for external machining

▲ for **hi.flex** and **BluFlex 2**



D_{min} - D_{max} mm	KOMET no.	LF mm	Adapter	WT kg	Insert	62 866 ... EUR W4/6A	
5 - 70	M05 90300	58	ABS 32	0,377	TO.X 0902..	509,60	**07000**

Cylindrical screw

TORX® Screws

Spare parts Insert	62 950 ... EUR W7/6B		62 950 ... EUR W7/6B	
TO.X 0902..	1,13	**26800**	3,05	**12000**

→ **Page 58+59**
Find suitable indexable inserts here.

A detailed operating manual is available for download in the online shop next to the product.

MicroKom – Adapter

▲ for 62 852 ..., 62 853 ..., 62 856 ... (essential for using the boring bar)



DCONWS mm	KOMET no.	DF mm	BD mm	LPR mm	LB mm	Fig.	62 851 ... EUR W4/6A	
6	M05 90200	31		16		1	138,10	00600
8	M05 90210	31		16		1	138,10	00800
10	M05 90220	46	31	25	15	2	173,00	01000
12	M05 90230	46	31	25	15	2	173,00	01200
16	M05 90240	46	31	30	20	2	173,00	01600

Cylindrical screw

Clamping screw

Spare parts DCONWS	62 950 ... EUR W7/6B		62 950 ... EUR W7/6B	
6 - 8			2,03	44800
10 - 12	1,13	00000	2,03	44800
16	1,13	00000	2,03	14700

A detailed operating manual is available for download in the online shop next to the product.

MicroKom – Boring bar, vibration-optimised

▲ can only be used with adapter 62 851 ...
▲ with internal coolant supply



DCN mm	KOMET no.	WF mm	LU mm	OAL mm	DCONMS mm	Insert	62 852 ... EUR W4/6A	
5,6	B00 30280	2,80	22	65	6	WOHX 02T0..	202,40	10600
6,9	B00 30290	3,45	36	80	6	WOHX 02T0..	202,40	00600[1]
9,0	B00 00680	4,45	48	90	8	TO.X 06T1..	347,40	00800[1]
11,0	B00 00690	5,45	60	95	10	TO.X 06T1..	367,50	01000[1]

1) Carbide version

TORX® Screws

Spare parts Insert	62 950 ... EUR W7/6B	
WOHX 02T0..	3,05	11800
TO.X 06T1..	3,50	09700

→ **Page 57–59**
Find suitable indexable inserts here.

MicroKom – Carbide boring shank

▲ for boring head 62 854 ...
▲ can only be used with adapter 62 851 ...
▲ with internal coolant supply



Dmin - Dmax mm	KOMET no.	OAL mm	BDRED mm	LDRED mm	DCONMS mm	62 853 ... EUR W4/6A	
13 - 17	G10 12060	120	12	75	12	410,30	01300
17 - 22	G10 12070	140	16	100	16	494,80	01700
22 - 26	G10 12080	140	16	100	16	494,80	02200

Fixing screw

Spare parts DCONMS	62 950 ... EUR W7/6B	
12	5,74	19700
16	5,74	19800

MicroKom – Boring head

▲ for boring shank 62 853 ...



Dmin - Dmax mm	KOMET no.	WF mm	BDRED mm	Insert	62 854 ... EUR W4/6A	
13 - 15	G10 12621	6,45	12	TO.X 0902..	191,80	01300
15 - 17	G10 12841	7,45	12	TO.X 0902..	195,80	01500
17 - 19	G10 12711	8,45	16	TO.X 0902..	207,80	01700
19 - 22	G10 12861	9,45	16	TO.X 0902..	214,60	01900
22 - 26	G10 12731	10,95	16	TO.X 0902..	214,60	02200

TORX® Screws

Spare parts Insert	62 950 ... EUR W7/6B	
TO.X 0902..	3,05	12000

→ **Page 58+59**
Find suitable indexable inserts here.

MicroKom – Boring bar

▲ can only be used with adapter 62 851 ...
▲ with internal coolant supply



62 856 ...

DCN mm	KOMET no.	OAL mm	LPR mm	LU mm	DCONMS mm	WF mm	Insert	EUR W4/6A	
5,6	B00 37010	48	26	20	8	2,75	WOHX 02T0..	194,40	**05600**
6,5	B00 37020	52	30	24	8	3,20	WOHX 02T0..	187,80	**06500**
8,0	B00 15510	57	35	28	8	3,95	TO.X 06T1..	183,80	**08000**
8,0	B00 15610	75	35	28	16	3,95	TO.X 06T1..	186,40	**00800**
10,0	B00 15620	80	40	33	16	4,95	TO.X 06T1..	187,80	**01000**
11,0	B00 15710	85	45	38	16	5,45	TO.X 0902..	191,80	**01100**
12,0	B00 15530	67	45	39	8	5,95	TO.X 0902..	194,40	**11200**
12,0	B00 15630	85	45	38	16	5,95	TO.X 0902..	194,40	**01200**
14,0	B00 15640	90	50	43	16	6,95	TO.X 0902..	197,20	**01400**
16,0	B00 15650	95	55	49	16	7,95	TO.X 0902..	207,80	**01600**
18,0	B00 15661	100	60	54	16	8,95	TO.X 0902..	215,80	**01800**
19,0	B00 15751	105	65	59	16	9,45	TO.X 0902..	215,80	**01900**
20,0	B00 15671	105	65	59	16	9,95	TO.X 0902..	217,30	**02000**
22,0	B00 15681	105	65	59	16	10,95	TO.X 0902..	234,70	**02200**
24,0	B00 15691	105	65	60	16	11,95	TO.X 0902..	236,00	**02400**

TORX® Screws

62 950 ...

Spare parts DCN	EUR W7/6B	
5,6 - 6,5	3,05	**11800**
8 - 10	3,50	**12800**
11 - 24	3,05	**12000**

→ **Page 57–59**
Find suitable indexable inserts here.

MicroKom – Boring bar

▲ with thro' coolant

ABS

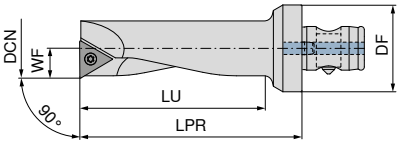

62 857 ...

DCN mm	KOMET no.	WF mm	DF mm	LU mm	LPR mm	Insert	EUR W4/6A	
8	B00 25610	3,95	32	26	42	TO.X 06T1..	317,80	**07989**
9	B00 25700	4,45	32	32	48	TO.X 06T1..	320,60	**21989**
10	B00 25620	4,95	32	32	48	TO.X 06T1..	320,60	**08989**
11	B00 25710	5,45	32	41	57	TO.X 0902..	329,80	**23989**
12	B00 25630	5,95	32	41	57	TO.X 0902..	328,50	**09989**
14	B00 25640	6,95	32	49	64	TO.X 0902..	331,20	**10989**
16	B00 25650	7,95	32	57	72	TO.X 0902..	340,60	**11989**
18	B00 25661	8,95	32	57	72	TO.X 0902..	349,90	**13989**
20	B00 25671	9,95	32	67	82	TO.X 0902..	355,40	**15989**
22	B00 25681	10,95	32	68	82	TO.X 0902..	363,40	**17989**
24	B00 25691	11,95	32	68	82	TO.X 0902..	370,00	**19989**

TORX® Screws

62 950 ...

Spare parts Insert	EUR W7/6B	
TO.X 06T1..	3,50	**12800**
TO.X 0902..	3,05	**12000**

→ **Page 58+59**
Find suitable indexable inserts here.

MicroKom – hi.flex micro – precision adjustment head

- ▲ for MicroKom boring bars and serrated bodies with DCONMS = 12 mm
- ▲ with thro' coolant supply
- ▲ LSCX = Recess depth of boring bar
- ▲ max. speed 30,000 rpm with slide in centre position
- ▲ UltraMini / EcoCut boring bar adapter for diameters from 0.5 mm

ABS

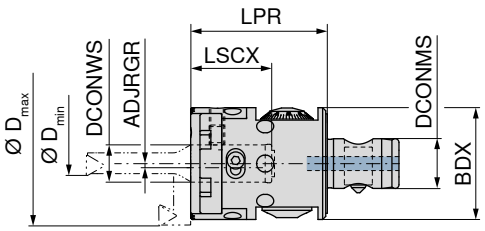

NEW

Analogue

62 800 ...

D_{min} - D_{max} mm	KOMET no.	Adapter	DCONWS mm	DCONMS mm	BDX mm	LPR mm	LSCX mm	ADJRGR mm	WT kg	EUR W4/6A	
0,5 - 60	M05 03000	ABS 32	12	16	36	44	26	-0,25 - 2,5	0,3	1.196,00	**06089**

Disk spring

62 950 ...

Grubscrew

62 950 ...

Spare parts for Article no.		EUR W7/6B			EUR W7/6B	
62 800 06089	Ø5,5x1,0	6,34	**53700**	M5x8 DIN913	1,13	**53500**

A detailed operating manual is available for download in the online shop next to the product.

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

→ **Page 6**
Here you will find a detailed system overview.

MicroKom – Precision spindle set hi.flex micro

NEW

Scope of supply:

- ▲ **1 plastic case**
- ▲ **1 precision adjustment head**
- ▲ **1 insert holder**
  - – 62 863 14400 Ø 25 – Ø 44 mm
- ▲ **3 boring bars**
  - – 62 845 00800 Ø 8 mm
  - – 62 845 01400 Ø 14 mm
  - – 62 845 02000 Ø 20 mm
- ▲ **2 adapters**
  - – 62 851 12499 Ø 4 mm
  - – 62 851 12699 Ø 6 mm
- ▲ **1 serrated body**
  - – 62 861 04400 Ø 25 – Ø 44 mm
- ▲ **1 filling piece**
  - – 62 862 01200 Ø 12x24 mm
- ▲ **10 indexable inserts**
  - – 5 pieces 62 601 90206 – TOGX06T102EN-14 BK60
  - – 5 pieces 62 601 70409 – TOGX090204EN-14 BK60
- ▲ **1 cylindrical screw**
  - – 62 950 53600 M5x16 mm
- ▲ **1 screwdriver**
  - – SW2,5

62 800 ...

D_{min} - D_{max} mm	EUR W4/6A	
8 - 60	2.120,00	**99989**

MicroKom – UltraMini / EcoCut boring bar adapter

▲ for **hi.flex micro**
▲ 4 clamping flats (offset by 90°) on Ø DCONMS
▲ with thro' coolant supply



NEW

62 851 ...

DCONWS mm	KOMET no.	OAL mm	BD mm	LFSF mm	LSC mm	DCONMS mm	EUR W4/6A	
4	M05 90900	39	22	14	18	12	152,70	**12499**
5	M05 90910	39	22	14	18	12	152,70	**12599**
6	M05 90920	39	22	14	18	12	152,70	**12699**
7	M05 90930	39	25	14	18	12	152,70	**12799**
8	M05 90940	39	25	14	18	12	152,70	**12899**

Clamping screw

70 950 ...

Spare parts DCONWS		EUR 2A/28	
4 - 5	M5x10 ISO 4026	3,84	**867**
6 - 8	M8x1x8 - SW4	3,84	**123**

Suitable UltraMini / EcoCut tools can be found in → **Chapters 10 and 12.**

MicroKom – Boring bar for hi.flex micro

▲ with thro' coolant

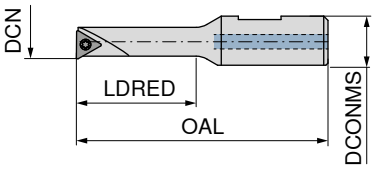

NEW

62 845 ...

DCN mm	KOMET no.	OAL mm	LDRED mm	DCONMS mm	Insert	EUR W4/6A	
8	B05 80080	58,88	28,0	12	TO.X 06T1..	104,60	**00800**
14	B05 80140	70,00	39,5	12	TO.X 0902..	104,60	**01400**
20	B05 80200	85,00	54,4	12	TO.X 0902..	104,60	**02000**

TORX® Screws

62 950 ...

Spare parts Insert		EUR W7/6B	
TO.X 06T1..	M2x3,8/IP6	3,50	**12800**
TO.X 0902..	M2,6x5,2 - 08IP	3,05	**12000**

MicroKom – Serrated body for hi.flex micro

▲ with thro' coolant

Scope of supply:
without insert holder

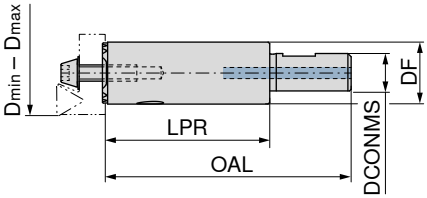

NEW

D_{min} - D_{max} mm	KOMET no.	DCONMS mm	OAL mm	LPR mm	DF mm	62 861 ... EUR W4/6A	
25 - 44	M05 90120	12	76,39	51,39	19	72,36	**04400**

Cylindrical screw

Disk spring

Spare parts

DCONMS	62 950 ... EUR W7/6B			62 950 ... EUR W7/6B	
12	M5x16	2,89	**53600**	10x5,2x0,3	2,03	**19100**

MicroKom – Insert holder for hi.flex micro

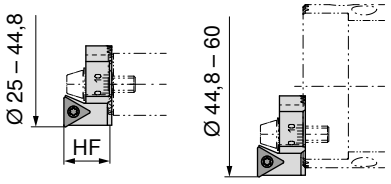

NEW

DCN mm	DCX mm	KOMET no.	HF mm	Insert	62 863 ... EUR W4/6A	
25	60	M05 20110	14,48	TO.. 0902	160,90	**14400**

TORX® Screws

Spare parts

Insert	62 950 ... EUR W7/6B	
TO.. 0902	3,05	**09900**

MicroKom – Filling piece for hi.flex micro

▲ For targeted redirecting of the thro' coolant to the cutting edge when using insert holders with diameters from 45 mm



NEW

DCONMS mm	KOMET no.	62 862 ... EUR W4/6A	
12	M05 90700	10,83	**01200**

→ **Page 58+59**
Find suitable indexable inserts here.

MicroKom – M03Speed – precision adjustment head

Scope of supply:

Precision adjustment head with clamping screw
Please order insert holder and indexable insert separately

ABS

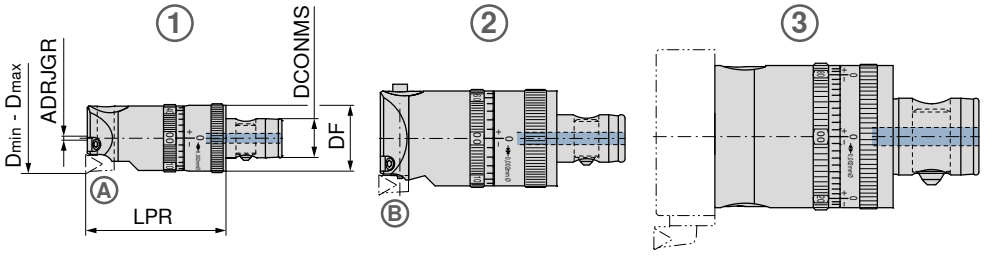

D_{min} - D_{max} mm	KOMET no.	Adapter	DCONMS mm	DF mm	LPR mm	Fig.	Suitable insert holders	ADJRGR mm	WT kg	62 815 ... EUR W4/6A	
24,8 - 33,0	M03 00115	ABS 25	13	25	50	1	62 864 03300	0,25 Ø	0,15	1.986,00	**03390**
29 - 39	M03 00515	ABS 25	13	25	50	1	62 864 03900	0,4 Ø	0,17	2.029,00	**03990**
38 - 50	M03 01025	ABS 32	16	32	60	2	62 864 05000	0,4 Ø	0,35	2.129,00	**05089**[1)]
49 - 63	M03 01535	ABS 40	20	40	70	2	62 864 08000	0,4 Ø	0,63	2.398,00	**06388**[1)]
62 - 80	M03 02045	ABS 50	28	50	75	2	62 864 08000	0,6 Ø	1,12	2.555,00	**08097**[1)]
79 - 103	M03 02555	ABS 63	34	63	80	2	62 864 10300	0,6 Ø	1,91	2.808,00	**10396**[1)]
38 - 63	M03 20170	ABS 32	16	32	81	3		0,4 Ø	0,35	2.117,00	**06389**[2)]
62 - 103	M03 20140	ABS 50	28	50	103	3		0,6 Ø	1,30	2.117,00	**10397**[2)]
100 - 206	M03 20090	ABS 63	34	63	106	3		0,6 Ø	1,91	2.117,00	**20696**[2)]

1) With dynamic balancing compensation
2) With dynamic balancing compensation / can only be used with interchangeable bridge (Art. No. 62 865 ...)

TORX® Screws

Clamping screw

Grub screw

Spare parts for Article no.		62 950 ... EUR W7/6B			62 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
62 815 03390							M4x0,5	2,03	**15600**
62 815 03990							M4x0,5	2,03	**15600**
62 815 05089	M3,5x7,3 - 10IP	3,05	**12600**				M4x0,5	2,03	**15600**
62 815 06388	M3,5x7,3 - 10IP	3,05	**12600**				M5x0,5	2,03	**15700**
62 815 08097	M3,5x7,3 - 10IP	3,05	**12600**				M5x0,5	2,03	**15700**
62 815 10396	M5x9,4/IP6	3,05	**45400**				M6x8 - SW3	1,11	**11300**
62 815 06389				M8x10	8,99	**37400**			
62 815 10397				M8x10	8,99	**37400**			
62 815 20696	M5x9,4/IP6	3,05	**45400**	M8x10	8,99	**37400**			

The TORX® screws 62 950 12600 / 62 950 45400 are designed for mounting the insert holder on the precision adjustment head.

A detailed operating manual is available for download in the online shop next to the product.

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

→ **Page 8**
Here you will find a detailed system overview.

MicroKom – M03Speed – Insert holder

Scope of supply:
without inserts
incl. mounting screws





For precision adjustment head	For precision adjustment head (with interchangeable bridge)	KOMET no.	Insert	Fig.	62 864 ... EUR W4/6A	
62 815 03390		M03 10011	TO.. 06T1	A	177,00	**03300**
62 815 03990		M03 10021	TO.. 06T1	A	177,00	**03900**
62 815 05089	62 815 06389 (62 865 05100 / 62 865 06300)	M03 10033	TO.. 06T1	B	145,90	**05000**
62 815 06388 / 62 815 08097	62 815 10397 (62 865 08300 / 62 865 10300)	M03 10043	TO.. 0902	B	145,90	**08000**
62 815 10396		M03 10063	TO.. 0902	B	155,00	**10300**
	62 815 20696 (62 865 13000 / 62 865 16800 / 62 865 20600)	M03 10070	TO.. 0902	C	155,00	**20600**

TORX® Screws

Spare parts Insert		62 950 ... EUR W7/6B	
TO.. 06T1	M2x4,9/IP6	3,50	**09700**
TO.. 0902	M2,6x5,2 - 08IP	3,05	**12000**

→ **Page 58+59**
Find suitable indexable inserts here.

MicroKom – M03Speed – Interchangeable bridge

Scope of supply:
without insert holder

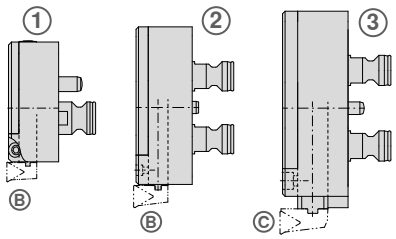



D_{min} - D_{max} mm	KOMET no.	Fig.	WT kg	For precision adjustment head	Suitable insert holders	62 865 ... EUR W4/6A	
38 - 51	M03 20180	1	0,06	62 815 06389	62 864 05000	724,20	**05100**
50 - 63	M03 20190	1	0,08	62 815 06389	62 864 05000	745,10	**06300**
62 - 83	M03 20150	2	0,20	62 815 10397	62 864 08000	776,30	**08300**
82 - 103	M03 20160	2	0,24	62 815 10397	62 864 08000	778,90	**10300**
100 - 130	M03 20100	3	0,39	62 815 20696	62 864 20600	853,10	**13000**
128 - 168	M03 20110	3	0,49	62 815 20696	62 864 20600	978,10	**16800**
166 - 206	M03 20120	3	0,59	62 815 20696	62 864 20600	1.128,00	**20600**

MicroKom – FF precision adjustment head

Scope of supply:

Head with clamping screw
Without precision turning insert

ABS

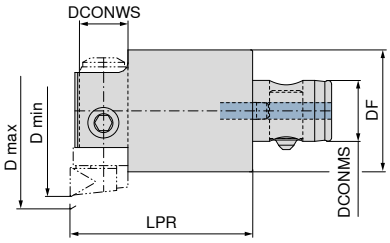

D_{min} - D_{max} mm	KOMET no.	Adapter	DCONWS mm	DCONMS mm	DF mm	LPR mm	WT kg	62 810 ... EUR W4/6A	
29,5 - 36	B30 11010	ABS 25	10	13	25	50	0,17	317,80	**03690**
35,5 - 42	B30 11020	ABS 25	10	13	25	50	0,18	317,80	**04290**
39 - 45	B30 12010	ABS 32	12	16	32	60	0,35	331,20	**04589**
44 - 50	B30 12020	ABS 32	12	16	32	60	0,35	331,20	**05089**
47 - 57	B30 13010	ABS 40	16	20	40	60	0,52	351,40	**05788**
56 - 66	B30 13020	ABS 40	16	20	40	60	0,52	351,40	**06688**
58 - 71	B30 14010	ABS 50	20	28	50	70	0,97	388,90	**07197**
70 - 83	B30 14020	ABS 50	20	28	50	70	1,05	388,90	**08397**
79 - 94	B30 15010	ABS 63	25	34	63	70	1,58	450,50	**09496**
93 - 108	B30 15020	ABS 63	25	34	63	70	1,61	450,50	**10896**
100 - 121	B30 16010	ABS 80	32	46	80	90	3,33	539,00	**12192**
120 - 141	B30 16020	ABS 80	32	46	80	90	3,37	539,00	**14192**
138 - 159	B30 17010	ABS 100	32	56	100	90	6,56	623,50	**15991**
158 - 179	B30 17020	ABS 100	32	56	100	90	6,80	623,50	**17991**
178 - 199	B30 17030	ABS 100	32	56	100	90	6,61	623,50	**19991**

Clamping screw

Spare parts for Article no.		62 950 ... EUR W7/6B	
62 810 03690	M6x6/SW3	1,13	**44700**
62 810 04290	M6x6/SW3	1,13	**44700**
62 810 04589	M8x8 - SW4	2,03	**14700**
62 810 05089	M8x10 - SW4	2,03	**44800**
62 810 05788	M10x10/SW5	2,03	**44900**
62 810 06688	M10x10/SW5	2,03	**44900**
62 810 07197	M12x12/SW6	1,13	**45000**
62 810 08397	M12x12/SW6	1,13	**45000**
62 810 09496	M16x16/SW8	1,13	**45100**
62 810 10896	M16x16/SW8	1,13	**45100**
62 810 12192	M20x20 - SW10	2,25	**45200**
62 810 14192	M20x20 - SW10	2,25	**45200**
62 810 15991	M20x30/SW10	2,58	**45300**
62 810 17991	M20x20 - SW10	2,25	**45200**
62 810 19991	M20x20 - SW10	2,25	**45200**

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

→ **Page 8**
Here you will find a detailed system overview.

MicroKom – FF precision turning insert

Scope of supply:

Precision turning insert with fixing screw
Please order indexable insert separately



5

for	DCONMS mm	KOMET no.	LF mm	WF mm	BDX mm	OAL mm	Insert	62 855 ... EUR W4/6A	
62 810 03690 / 62 810 04290	10	M30 20011	11,0	7,5	14	28,5	TO.. 06T1	399,60	**03000**
62 810 04589 / 62 810 05089	12	M30 20021	12,5	9,0	16	37,5	TO.. 06T1	445,20	**03900**
62 810 05788 / 62 810 06688	16	M30 20031	16,0	11,0	20	45,0	TO.. 0902	488,20	**04700**
62 810 07197 / 62 810 08397	20	M30 20041	18,0	14,5	25	56,0	TO.. 0902	564,40	**05800**
62 810 09496 / 62 810 10896	25	M30 20051	21,6	16,0	32	77,5	TO.. 1403	614,10	**07900**
62 810 12192 / 62 810 14192	32	M30 20061	25,5	19,0	40	97,0	TO.. 1403	722,80	**10000**
62 810 15991 / 62 810 17991 / 62 810 19991	32	M30 20071	25,5	19,0	40	131,0	TO.. 1403	776,40	**13800**

TORX® Screws

Screwdriver

Spare parts DCONMS	62 950 ...			80 950 ...		
		EUR W7/6B			EUR Y7	
10	M2x3,8/IP6	3,50	**12800**			
12	M2x3,8/IP6	3,50	**12800**			
16	M2,6x5,2 - 08IP	3,05	**12000**	T08 - IP	7,61	**060**
20	M2,6x6,2 - 08IP	3,05	**09900**	T08 - IP	7,61	**060**
25	M3,5x7,3 - 10IP	3,05	**12600**	T10 - IP	8,19	**062**
32	M3,5x7,3 - 10IP	3,05	**12600**	T10 - IP	8,19	**062**

→ **Page 58+59**
Find suitable indexable inserts here.

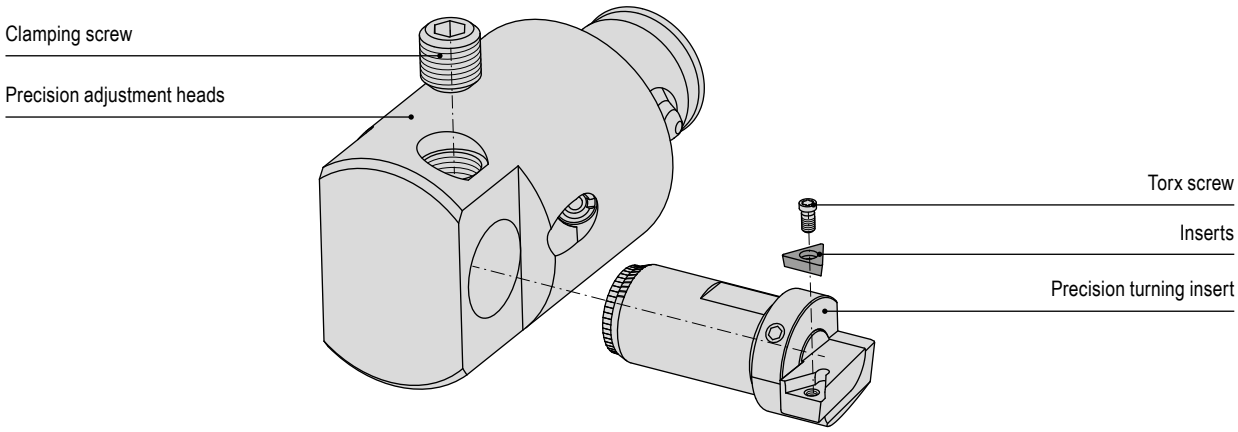

SpinTools – Micro-Boring Head

▲ max. speed 30,000 U/min
▲ Digital variant: please order the digital stick separately

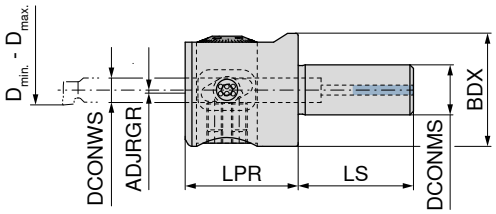

D_{min} - D_{max}	BDX	DCONWS	DCONMS	LPR	LS	ADJRGR	WT	Analogue 62 382 ... EUR W4		Digital 62 386 ... EUR W4	
mm	mm	mm	mm	mm	mm	mm	kg				
0,3 - 7,1	25	4	10	25	25	0 - 1,7	0,10	1.279,00	**025**	1.527,00	**025**
0,3 - 19,1	32	7	16	32	40	0 - 2,75	0,25	1.327,00	**032**	1.581,00	**032**

Clamping screw ST

Locking screw

Spare parts for Article no.		62 950 ... EUR W7			62 950 ... EUR W7	
62 382 025 / 62 386 025	M5x4	1,55	**214**	M4x8	1,32	**228**
62 382 032 / 62 386 032	M6x5	1,55	**215**	M6x10	1,32	**229**

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 7**
Here you will find a detailed system overview.

SpinTools – Digital Stick

▲ suitable for all SpinTools digital heads as well as for hi.flex Digital
▲ revised software for even more precise adjustment

Scope of supply:
incl. AAA Battery

62 309 ... EUR W4	
317,10	**00100**

A detailed operating manual is available for download in the online shop next to the product.

SpinTools – Solid carbide boring bar

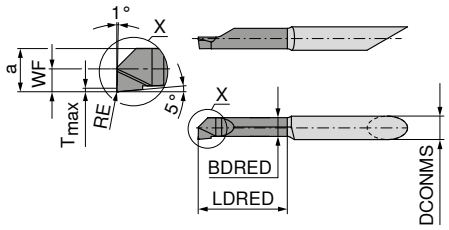

62 383 ...

D_{min} - D_{max} mm	DCONMS mm	LDRED mm	RE mm	a mm	BDRED mm	WF mm	$T_{max.}$ mm	EUR W4	
0,3 - 0,7	4	1,2		0,25	0,15	0,15	0,03	59,81	**003**
0,6 - 1,1	4	2,5		0,55	0,46	0,30	0,05	59,81	**006**
1,0 - 2,3	4	4,0	0,05	0,95	0,65	0,50	0,10	60,25	**010**
2,2 - 3,3	4	6,0	0,05	2,00	1,55	1,10	0,20	50,99	**022**
3,2 - 4,3	4	10,2	0,05	3,00	2,55	1,60	0,20	52,14	**032**
3,9 - 7,1	4	15,2	0,05	3,70	3,45	1,95	0,30	55,91	**039**
5,2 - 6,3	7	20,3	0,05	5,00	4,25	2,60	0,50	78,07	**052**
6,2 - 7,3	7	20,3	0,05	6,00	5,25	3,10	0,50	78,07	**062**
6,9 - 8,1	7	25,4	0,20	6,70	6,25	3,45	0,50	70,70	**069**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c Page 66

SpinTools – Carbide inserts

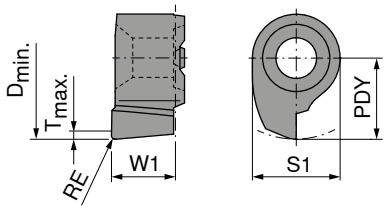

62 384 ...

D_{min} - D_{max} mm	RE mm	PDY mm	S1 mm	W1 mm	$T_{max.}$ mm	EUR W4	
6,9 - 8,1	0,2	3,45	4,8	3,5	1	28,23	**069**
7,9 - 9,1	0,2	3,95	4,8	3,5	1	28,23	**079**
8,9 - 10,1	0,2	4,45	4,8	3,5	1	28,23	**089**
9,9 - 12,1	0,2	4,95	7,0	3,9	1	29,98	**099**
11,9 - 14,1	0,2	5,95	7,0	3,9	1	29,98	**119**
13,9 - 19,1	0,2	6,95	7,0	3,9	1	29,98	**139**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c Page 66

SpinTools – Toolholder for carbide inserts

▲ with thro' coolant
▲ appropriate inserts for article no. 62 384 ... can be found in the table above

SpinTools – Adapter



62 335 ...

DCONMS mm	DCONWS mm	OAL mm	EUR W4	
7	4	30	92,78	**407**

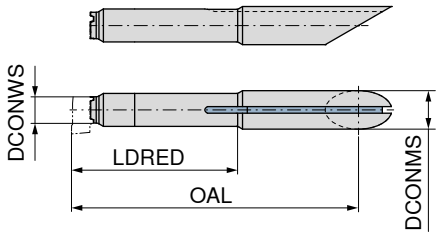

62 385 ...

DCONMS mm	LDRED mm	DCONWS mm	OAL mm	EUR W4	
7	30	4,8	56	251,50	**330**
7	35	7,0	61	266,50	**350**

TORX® Screws

Key D

62 950 ... **80 950 ...**

Spare parts for Article no.	EUR W7		EUR Y7	
62 385 330	7,39	**007**	13,18	**124**
62 385 350	7,39	**094**	14,50	**126**

SpinTools – Precision boring head

▲ with thro' coolant

Scope of supply:

Fine boring head without shank, without insert holder

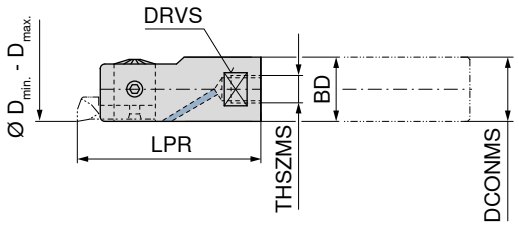

BD	D_{min} - D_{max}	THSZMS	DCONMS	LPR	DRVS	WT	62 304 ... EUR W4	
mm	mm		mm	mm	mm	kg		
14	14,7 - 17,1	M6	14	39,8	12	0,05	1.081,00	**017**
16	16,7 - 20,1	M10	16	39,8	14	0,07	1.081,00	**020**
19	19,7 - 24,1	M10	18	39,8	16	0,09	1.081,00	**024**

TORX® Screws

Key D

Clamping screw ST

Spare parts for Article no.		62 950 ... EUR W7			80 950 ... EUR Y7			62 950 ... EUR W7	
62 304 017	M2,5x6	4,16	**022**	T07	10,05	**109**	M3x2	2,61	**017**
62 304 020	M2,5x6	4,16	**022**	T07	10,05	**109**	M3x2,5	2,61	**018**
62 304 024	M2,5x6	4,16	**022**	T07	10,05	**109**	M3x4	2,61	**019**

→ **Page 73**
Here you will find information about the working length.

→ **Page 9**
Here you will find a detailed system overview.

SpinTools – Insert holder, 90°

Scope of supply:

without insert

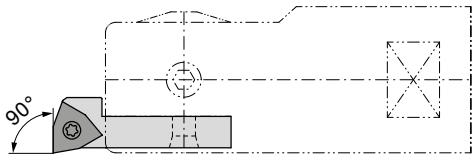



Insert	62 317 ... EUR W4	
WC.. 0201..	188,50	**024**

TORX® Screws

Key D

Spare parts Insert		62 950 ... EUR W7			80 950 ... EUR Y7	
WC.. 0201..	M2x3,7	4,16	**021**	T06	10,87	**108**

→ **Page 62**
Find suitable indexable inserts here.

SpinTools – High-speed carbide boring bars

▲ with threaded mounting stud made of high quality steel
▲ with thro' coolant
▲ Shank clamping length 35 mm
▲ Boring shanks with DCONMS Ø 18 mm are for use in collet chuck or hydraulic chuck

Scope of supply:
boring shank, without boring head

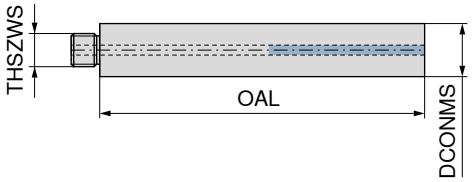



DCONMS mm	OAL mm	THSZWS	62 353 ... EUR W4		62 353 ... EUR W4	
14	110	M6	488,90	**014**		
16	120	M10	547,40	**016**		
18	100	M10			579,60	**018**
18	140	M10			798,20	**118**
18	180	M10			1.032,00	**218**

→ **Page 73**
Here you will find information about the working length.

SpinTools – Shank extensions (tempered steel)

▲ with thro' coolant

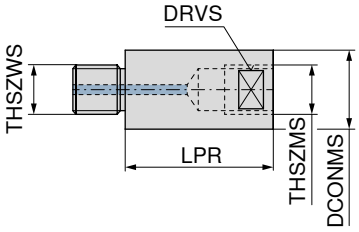

DCONMS mm	LPR mm	THSZWS	THSZMS	DRVS mm	62 349 ... EUR W4	
16	32	M10	M10	14	86,09	**732**
16	64	M10	M10	14	97,42	**764**

SpinTools – Multi-Head – boring and fine boring head

▲ **For boring bars Ø 16 mm and bridges**
▲ With internal coolant supply
▲ LSCX = Boring depth

Scope of supply:
without boring bar, bridge and insert holder



STM Modular



HSK-A 63



SK 40



MAS-BT 40

STM Modular

HSK-A

SK

MAS-BT

D_{min} - D_{max} mm	Adapter	DCONMS mm	BDX mm	LPR mm	LB mm	LSCX mm	ADJRGR mm	WT kg	STM Modular 62 372 ... EUR W4		HSK-A 62 373 ... EUR W4		SK 62 373 ... EUR W4		MAS-BT 62 373 ... EUR W4	
3 - 320	STM 36	36	63	71,6		111,6	0 - 2,7	1,69	1.527,00	**653**						
3 - 320	SK 40		63	91,6	72,5	81,6	0 - 2,7	1,90					1.868,00	**153**		
3 - 320	BT 40		63	91,6	69,0	81,6	0 - 2,7	2,20							1.868,00	**453**
3 - 320	HSK-A 63		63	96,6	70,6	73,0	0 - 2,7	1,90			1.868,00	**653**				

Clamping screw

Screw for drivers

Driver

Clamping screw MH

Flange screw

Spare parts D_{min} - D_{max}	Clamping screw 62 950 ... EUR W7		Screw for drivers 62 950 ... EUR W7		Driver 62 950 ... EUR W7		Clamping screw MH 62 950 ... EUR W7		Flange screw 62 950 ... EUR W7	
3 - 320	1,32	**227**	1,55	**167**	51,09	**040**	2,33	**226**	3,79	**225**

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 50–56**
Here you will find the suitable base adaptors.

→ **Page 7**
Here you will find a detailed system overview.

SpinTools – Multi-Head – Boring and Fine Boring Head Set

▲ suitable for Ø 3 – Ø 320 mm

Scope of supply:

▲ **1 Tool Kit**
▲ **1 Multi-Head-Boring- and Fine Boring Head (depending on selection)**
▲ **4 Boring bars**
– 62 345 015 Ø 9.75 – Ø 15.1 mm
– 62 345 020 Ø 14.75 – Ø 20.1 mm
– 62 345 024 Ø 19.75 – Ø 25.1 mm
– 62 345 029 Ø 24.75 – Ø 30.1 mm
▲ **2 Boring tools, adjustable**
– 62 375 048 Ø 29.75 – Ø 48.1 mm
– 62 375 088 Ø 47.75 – Ø 88.1 mm
▲ **incl. insert holder**
– 62 377 048 CC.. 0602
– 62 377 088 CC.. 0602
▲ **1 Bridge**
– 62 376 164 Ø 86 – Ø 164 mm
▲ **1 Torx-Key – T7**
▲ **1 6-adjustment key – SW5**

D_{min} - D_{max} mm	Adapter	STM Modular 62 374 ... EUR W4		HSK-A 62 379 ... EUR W4		SK 62 379 ... EUR W4		MAS-BT 62 379 ... EUR W4	
9,75 - 164	HSK-A 63			2.940,00	**996**				
9,75 - 164	BT 40							2.940,00	**993**
9,75 - 164	SK 40					2.940,00	**990**		
9,75 - 164	STM 36	2.640,00	**999**						

SpinTools – Bridge for Multi-Head

▲ Ø adjustable
▲ With internal coolant supply

Scope of supply:
without tool holder
including fixation screws

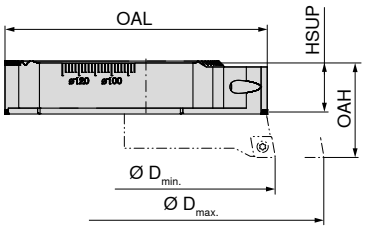

D_{min} - D_{max} mm	OAL mm	HSUP mm	OAH mm	62 376 ... EUR W4	
86 - 164	80	15	29	353,90	164
162 - 320	158	15	29	530,10	320

SpinTools – Tool holder for boring bar and bridge Multi-Head

Scope of supply:
without inserts
incl. mounting screws





for	LF mm	HF mm	Insert	62 377 ... EUR W4	
62 375 048	28,2	12	CC.. 0602	258,20	048
62 375 088 / 62 376 ...	46,0	14	CC.. 0602	284,30	088
62 375 088 / 62 376 ...	46,0	14	CC.. 09T3	296,40	089

SpinTools – Counterweight

Scope of supply:
Including fixation screw



for	OAL mm	OAH mm	62 378 ... EUR W4	
62 376 ...	38	12	100,60	320

TORX® Screws

Key D

Flange screw

Spare parts for Article no.	62 950 ... EUR W7		80 950 ... EUR Y7		62 950 ... EUR W7	
62 377 048 / 62 377 088	4,16	022	10,05	109	3,79	225
62 377 089	5,04	023	11,96	113	3,79	225

→ Page 63
Find suitable indexable inserts here.

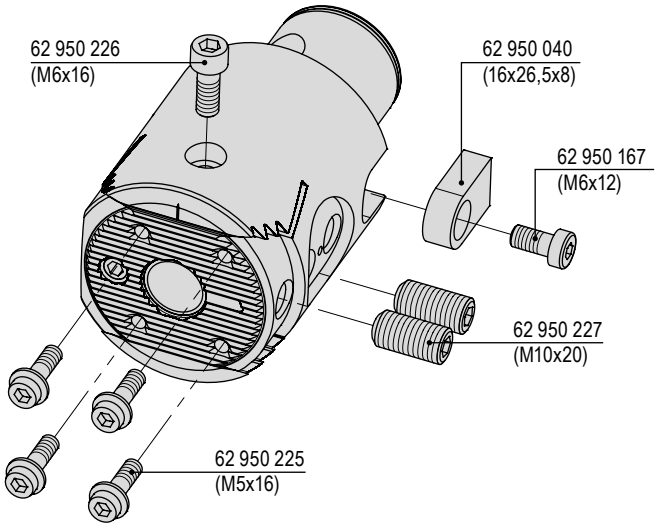

SpinTools – Single point boring heads – Modular system

▲ LSCX = Recess depth of boring bar
▲ With thro' coolant supply
▲ Digital variant: please order the digital stick separately



ER 32



without flange



with flange



Digital with collar

ER 32

without flange STM Modular

with flange STM Modular

Digital with collar STM Modular

D_{min} - D_{max} mm	Adapter	BDX mm	DF mm	DCONWS mm	LPR mm	LSCX mm	ADJRGR mm	WT kg	62 332 ... EUR W4		62 332 ... EUR W4		62 332 ... EUR W4		62 326 ... EUR W4	
3,0 - 88,1	ER 32	55	49,5	16	60	86,5	0 - 2,7	0,43	1.220,00	**732**						
3,0 - 88,1	STM 28	55	50,0	16	60	62,0	0 - 2,7	0,98			1.226,00	**553**				
3,0 - 88,1	STM 36	55	63,0	16	60	101,0	0 - 2,7	1,26					1.226,00	**653**		
3,0 - 88,1	STM 36	55	63,0	16	60	106,0	0 - 2,7	0,43							1.317,00	**036**

Clamping screw

Screw for drivers

Driver

Clamping screw ST

Spare parts for Article no.		62 950 ... EUR W7			62 950 ... EUR W7			62 950 ... EUR W7			62 950 ... EUR W7	
62 332 732	M10x16	1,55	**047**							M10x8	1,55	**046**
62 332 553	M10x16	1,55	**047**	M5x10	1,55	**166**	12x20x6	40,31	**039**	M10x8	1,55	**046**
62 332 653	M10x16	1,55	**047**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x8	1,55	**046**
62 326 036	M10x16	1,55	**047**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x8	1,55	**046**

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 50–56**
Here you will find the suitable base adaptors.

→ **Page 7**
Here you will find a detailed system overview.

SpinTools – Digital Stick

▲ suitable for all SpinTools digital heads as well as for hi.flex Digital
▲ revised software for even more precise adjustment

Scope of supply:
incl. AAA Battery

62 309 ... EUR W4	
317,10	**00100**

A detailed operating manual is available for download in the online shop next to the product.

SpinTools – Single point boring head – Monoblock analogue

▲ LSCX = Boring depth
▲ With internal coolant supply



HSK-A 63



SK 40



MAS-BT 40

HSK-A

SK

MAS-BT

5

D_{min} - D_{max} mm	Adapter	BDX mm	DCONWS mm	LPR mm	LB mm	LSCX mm	ADJRGR mm	WT kg	62 333 ... EUR W4		62 333 ... EUR W4		62 333 ... EUR W4	
3,0 - 88,1	HSK-A 63	55	16	95	69	70	0 - 2,7	1,66	1.556,00	**653**				
3,0 - 88,1	SK 40	55	16	90	70	80	0 - 2,7	1,83			1.556,00	**153**		
3,0 - 88,1	BT 40	55	16	90	63	80	0 - 2,7	1,90					1.556,00	**453**

Clamping screw

Clamping screw ST

Spare parts D_{min} - D_{max}		62 950 ... EUR W7			62 950 ... EUR W7	
3,0 - 88,1	M10x16	1,55	**047**	M10x8	1,55	**046**

SpinTools – Single point boring head – Monoblock digital

▲ LSCX = Recess depth of boring bar
▲ With thro' coolant supply
▲ Digital variant: please order the digital stick separately



HSK-A 63



SK 40



MAS-BT 40

Digital HSK-A

Digital SK

Digital MAS-BT

D_{min} - D_{max} mm	Adapter	BDX mm	DCONWS mm	LPR mm	LB mm	LSCX mm	ADJRGR mm	WT kg	62 363 ... EUR W4		62 363 ... EUR W4		62 363 ... EUR W4	
3,0 - 88,1	HSK-A 63	55	16	95	70	70	0 - 2,7	1,66	1.883,00	**688**				
3,0 - 88,1	SK 40	55	16	90	71	80	0 - 2,7	1,83			1.883,00	**188**		
3,0 - 88,1	BT 40	55	16	90	59	80	0 - 2,7	1,90					1.883,00	**488**

Clamping screw

Clamping screw ST

Spare parts D_{min} - D_{max}		62 950 ... EUR W7			62 950 ... EUR W7	
3,0 - 88,1	M10x16	1,55	**047**	M10x8	1,55	**046**

A detailed operating manual is available for download in the online shop next to the product.

SpinTools – Single point boring heads Set 1

▲ suitable for Ø 3 – Ø 88.1 mm
▲ supplied with Ø 9.75 – Ø 30.1 or Ø 9.75 – Ø 40.1 mm
▲ with thro' coolant

Scope of supply:

▲ 1 Tool Kit
▲ 1 single point boring head (depending on selection)
▲ 4 Boring bars (SK40- and MAS-BT-Set)
– 62 345 015 Ø 9,75 – Ø 15,1 mm
– 62 345 020 Ø 14,75 – Ø 20,1 mm
– 62 345 024 Ø 19,75 – Ø 25,1 mm
– 62 345 029 Ø 24,75 – Ø 30,1 mm
▲ 8 Boring bars (Modular-Set)
– 62 345 015 Ø 9,75 – Ø 15,1 mm
– 62 345 019 Ø 13,75 – Ø 19,1 mm
– 62 345 023 Ø 17,75 – Ø 23,1 mm
– 62 345 027 Ø 21,75 – Ø 27,1 mm
– 62 345 030 Ø 24,75 – Ø 30,1 mm
– 62 345 033 Ø 27,75 – Ø 33,1 mm
– 62 345 037 Ø 31,75 – Ø 37,1 mm
– 62 345 040 Ø 34,75 – Ø 40,1 mm
▲ 1 6-adjustment key – SW5
▲ 1 Torx-Key – T7

D_{min} - D_{max} mm	Adapter	STM Modular 62 334 ... EUR W4		SK 62 345 ... EUR W4		MAS-BT 62 345 ... EUR W4	
9,75 - 30,1	SK 40			1.993,00	990		
9,75 - 30,1	BT 40					1.993,00	993
9,75 - 40,1	STM 36	2.526,00	999				

SpinTools – Single point boring heads Set 2

▲ suitable for Ø 3 – Ø 88.1 mm
▲ Supplied with Ø 9.75 – Ø 88.1 mm
▲ with thro' coolant

Scope of supply:

▲ 1 Tool Kit
▲ 1 Fine boring head (depending on selection)
▲ 4 Boring bars
– 62 345 015 Ø 9.75 – Ø 15.1 mm
– 62 345 020 Ø 14.75 – Ø 20.1 mm
– 62 345 024 Ø 19.75 – Ø 25.1 mm
– 62 345 029 Ø 24.75 – Ø 30.1 mm
▲ 2 Boring tools, adjustable
– 62 375 048 Ø 29.75 – Ø 48.1 mm
– 62 375 088 Ø 47.75 – Ø 88.1 mm
▲ incl. insert holder
– 62 377 048 CC.. 0602
– 62 377 088 CC.. 0602
▲ 1 Torx key – T7
▲ 1 6-adjustment key – SW5

D_{min} - D_{max} mm	Adapter	STM Modular 62 334 ... EUR W4		HSK-A 62 345 ... EUR W4		SK 62 345 ... EUR W4		MAS-BT 62 345 ... EUR W4	
9,75 - 88,1	HSK-A 63			3.075,00	997				
9,75 - 88,1	BT 40							3.075,00	999
9,75 - 88,1	SK 40					3.075,00	998		
9,75 - 88,1	STM 36	2.739,00	997						

SpinTools – Single point boring heads ER32 Set

▲ Suitable for Ø 3.0 – Ø 88.1 mm
▲ Scope of supply Ø 9.75 – Ø 30.1 mm
▲ with thro' coolant supply

Scope of supply:

▲ 1 tool kit
▲ 1 single point boring head (62332732)
▲ 4 boring bars
– 62 345 015 Ø 9.75 – Ø 15.1 mm
– 62 345 020 Ø 14.75 – Ø 20.1 mm
– 62 345 024 Ø 19.75 – Ø 25.1 mm
– 62 345 029 Ø 24.75 – Ø 30.1 mm
▲ 1 Torx Key – T7
▲ 1 Allen Key – SW5

D_{min} - D_{max} mm	Adapter	62 332 ... EUR W4	
9,75 - 30,1	ER 32	1.623,00	999

SpinTools – Boring tools with carbide cutting edge

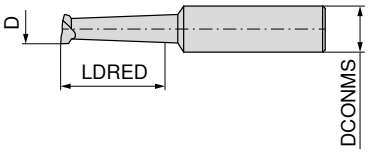

62 346 ...

D_{min} - D_{max} mm	LDRED mm	DCONMS h6 mm	EUR W4	
3,0 - 8,0	20	10	165,40	008
4,0 - 9,0	23	10	165,40	009
5,0 - 10,0	25	10	165,40	010
6,0 - 11,0	25	10	165,40	011
7,0 - 12,0	31	10	165,40	012

P	●
M	○
K	○
N	●
S	
H	
O	

→ v_c Page 66

SpinTools – Steel boring bars

▲ with thro' coolant



62 345 ...

D_{min} - D_{max} mm	OAL mm	LDRED mm	DCONMS h6 mm	Insert	EUR W4	
9,75 - 15,1	75	30	16	CC.. 0602	218,60	015
11,75 - 17,1	80	37	16	CC.. 0602	218,60	017
13,75 - 19,1	85	43	16	CC.. 0602	218,60	019
14,75 - 20,1	90	51	16	CC.. 0602	218,60	020
15,75 - 21,1	95	57	16	CC.. 0602	218,60	021
17,75 - 23,1	100	67	16	CC.. 0602	218,60	023
19,75 - 25,1	105	72	16	CC.. 0602	251,50	024
19,75 - 25,1	105	72	16	CC.. 09T3	251,50	025
21,75 - 27,1	110	77	16	CC.. 09T3	251,50	027
24,75 - 30,1	115	82	16	CC.. 0602	251,50	029
24,75 - 30,1	115	82	16	CC.. 09T3	251,50	030
27,75 - 33,1	115	82	16	CC.. 09T3	263,70	033
31,75 - 37,1	115	82	16	CC.. 09T3	263,70	037
34,75 - 40,1	115	82	16	CC.. 09T3	263,70	040
38,75 - 44,1	115	82	16	CC.. 09T3	281,50	044
42,75 - 48,1	115	82	16	CC.. 09T3	296,40	048
47,75 - 53,1	115	82	16	CC.. 09T3	330,70	053

→ **Page 63**
Find suitable indexable inserts here.

SpinTools – Adjustable boring bar bridge

▲ with thro' coolant

Scope of supply:
without insert holder



62 375 ...

D_{min} - D_{max} mm	OAL mm	BDX mm	LTA mm	DCONMS mm	EUR W4	
29,75 - 48,1	103	25	85	16	146,20	048
47,75 - 88,1	101	44	85	16	169,60	088

SpinTools – Tool holder for boring bar and bridge Multi-Head

Scope of supply:
without inserts
incl. mounting screws





62 377 ...

for	LF mm	HF mm	Insert	EUR W4	
62 375 048	28,2	12	CC.. 0602	258,20	048
62 375 088 / 62 376 ...	46,0	14	CC.. 0602	284,30	088
62 375 088 / 62 376 ...	46,0	14	CC.. 09T3	296,40	089

TORX® Screws

Key D

Flange screw

Spare parts for Article no.	62 950 ... EUR W7		80 950 ... EUR Y7		62 950 ... EUR W7	
62 377 048	4,16	022	10,05	109	3,79	225
62 377 088	4,16	022	10,05	109	3,79	225
62 377 089	5,04	023	11,96	113	3,79	225

→ **Page 63**
Find suitable indexable inserts here.

5

SpinTools –
Boring bars with carbide shank

▲ With internal coolant supply
▲ LTA = max. overhang

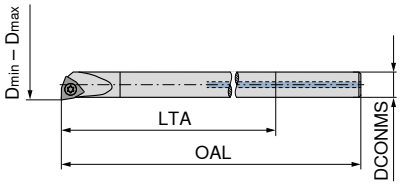

62 341 ...

D_{min} - D_{max} mm	DCONMS h6 mm	OAL mm	LTA mm	Insert	EUR W4	
5,8 - 11,2	5	80	45	WC.. 0201..	326,00	**011**
7,8 - 13,2	6	100	60	WC.. 0201..	326,00	**013**

TORX® Screws

Key D

62 950 ... | **80 950 ...**

Spare parts Insert	EUR W7		EUR Y7	
WC.. 0201..	4,16	**021**	10,87	**108**

→ **Page 62**
Find suitable indexable inserts here.

SpinTools –
Boring tool extensions

▲ with thro' coolant

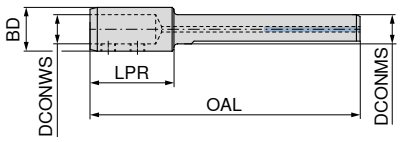

62 337 ...

DCONWS mm	DCONMS mm	BD mm	OAL mm	LPR mm	EUR W4	
10	16	16	128		213,30	**128**
16	16	24	148	44	243,30	**148**

Clamping screw

62 950 ...

Spare parts for Article no.	EUR W7	
62 337 128	5,39	**048**
62 337 148	6,26	**049**

SpinTools – Reduction sleeves

▲ for boring bars and boring tools



62 335 ...

DCONMS mm	DCONWS mm	OAL mm	EUR W4	
16	4	37	100,60	**104**
16	5	37	100,60	**105**
16	6	37	100,60	**106**
16	8	37	100,60	**108**
16	9	37	100,60	**109**
16	10	37	100,60	**110**
16	11	37	100,60	**111**
16	12	37	100,60	**112**
16	13	37	100,60	**113**
16	14	37	100,60	**114**

SpinTools –
High-speed boring head

▲ for overturning holder and high speed carbide shank
▲ With internal coolant supply
▲ $D_{max.}$ = using a head with fine adjustment 0 – 2,7 mm

Scope of supply:
Boring head without boring shank, without inserts

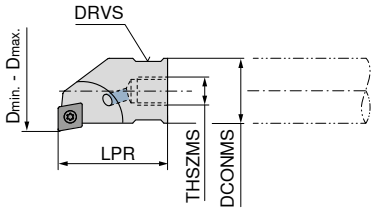

D_{min} - D_{max} mm	LPR mm	THSZMS	DCONMS $_{h6}$ mm	Insert	62 361 ... EUR W4	
8,75 - 14,1	18	M5	8	CC.. 0602	151,60	**014**
9,75 - 15,1	18	M5	9	CC.. 0602	151,60	**015**
10,75 - 16,1	23	M6	10	CC.. 0602	151,60	**016**
11,75 - 17,1	23	M6	11	CC.. 0602	151,60	**017**
12,75 - 18,1	23	M6	12	CC.. 0602	151,60	**018**
13,75 - 19,1	23	M6	13	CC.. 0602	151,60	**019**
14,75 - 20,1	23	M6	14	CC.. 0602	151,60	**020**
15,75 - 21,1	23	M6	14	CC.. 0602	151,60	**021**
16,75 - 22,1	27	M10	16	CC.. 0602	151,60	**022**
17,75 - 23,1	27	M10	16	CC.. 0602	151,60	**023**
19,75 - 25,1	27	M10	16	CC.. 0602	151,60	**025**
21,75 - 27,1	27	M10	16	CC.. 0602	154,50	**027**
24,75 - 30,1	27	M10	16	CC.. 0602	154,50	**030**
27,75 - 33,1	27	M10	16	CC.. 0602	154,50	**033**
31,75 - 37,1	27	M10	16	CC.. 0602	165,40	**037**
34,75 - 40,1	27	M10	16	CC.. 0602	179,00	**040**

TORX® Screws

Key D

Spare parts	62 950 ... EUR W7		80 950 ... EUR Y7	
Insert				
CC.. 0602	4,16	**022**	10,05	**109**

→ **Page 63**
Find suitable indexable inserts here.

A detailed operating manual is available for download in the online shop next to the product.

SpinTools –
High-speed carbide boring bars

▲ with threaded mounting stud made of high quality steel
▲ with thro' coolant
▲ Shank clamping length 35 mm

Scope of supply:
boring shank, without boring head

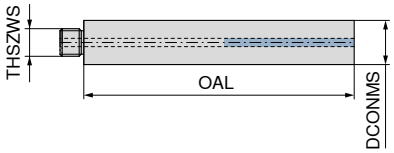

DCONMS mm	OAL mm	THSZWS	62 353 ... EUR W4	
8	73	M5	321,70	**008**
9	80	M5	337,10	**009**
10	82	M6	360,80	**010**
11	89	M6	378,90	**011**
12	96	M6	395,70	**012**
13	103	M6	405,30	**013**
14	110	M6	488,90	**014**
16	120	M10	547,40	**016**

→ **Page 73**
Here you will find information about the working length.

5

SpinTools – Single point finish boring heads

▲ With thro' coolant supply
▲ Digital variant: please order the digital stick separately

Scope of supply:
without insert holder and inserts

STM

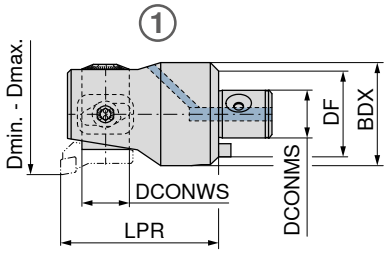

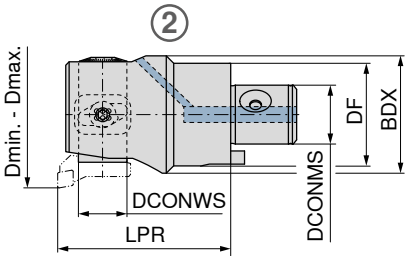

										Analogue		Digital	
										62 303 ...		62 308 ...	
D_{min} - D_{max} mm	D_{min} - D_{max} extended mm	Adapter	DCONMS mm	BDX mm	DF mm	LPR mm	DCONWS mm	WT kg	Fig.	EUR W4		EUR W4	
23,9 - 31,1	29,9 - 37,1	STM 11	11	22,5	20	40	11	0,08	1	800,60	**031**	944,20	**031**
30,9 - 40,1	37,9 - 47,1	STM 14	14	29,0	25	45	13	0,15	1	800,60	**040**	944,20	**040**
39,9 - 51,1	47,9 - 59,1	STM 18	18	37,0	32	65	17	0,38	1	828,00	**051**	966,00	**051**
50,9 - 67,1	64,9 - 81,1	STM 22	22	47,0	40	72	22	0,70	1	866,30	**067**	1.002,00	**067**
66,9 - 87,1	84,9 - 105,1	STM 28	28	59,0	50	82	30	1,32	2	933,20	**087**	1.059,00	**087**
86,9 - 116,1	104,9 - 134,1 (124,9 - 154,1)	STM 36	36	72,0	63	105	30	3,15	2	1.096,00	**116**	1.200,00	**116**

For optimal stability when fine boring the main insert holder ranges are preferred over the extended range.

Screw for drivers

Driver

Fillister-head screw

Clamping screw ST

		62 950 ...			62 950 ...			62 950 ...			62 950 ...	
Spare parts for Article no.		EUR W7			EUR W7			EUR W7			EUR W7	
62 303 031 / 62 308 031	M2x2,5	0,89	**162**	5x8,5x3	27,07	**035**	M4x6	8,34	**287**	M4x3	1,55	**213**
62 303 040 / 62 308 040	M2,5x6	0,89	**163**	6x10,3x4	28,14	**036**	M5x8	8,34	**288**	M5x4	1,55	**214**
62 303 051 / 62 308 051	M3x8	1,22	**164**	8x15x5	30,19	**037**	M6x10	8,34	**289**	M6x5	1,55	**215**
62 303 067 / 62 308 067	M4x10	1,22	**165**	10x18,1x6	34,30	**038**	M8x12	8,34	**290**	M8x6	1,55	**216**
62 303 087 / 62 308 087	M5x10	1,55	**166**	12x20x6	40,31	**039**	M10x16	8,34	**291**	M10x10	1,55	**217**
62 303 116 / 62 308 116	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x16	8,34	**291**	M10x18	1,55	**218**

→ **Page 50–56**
Here you will find the suitable base adaptors.

→ **Page 9**
Here you will find a detailed system overview.

SpinTools – Digital Stick

▲ suitable for all SpinTools digital heads as well as for hi.flex Digital
▲ revised software for even more precise adjustment

Scope of supply:
incl. AAA Battery

62 309 ...	
EUR W4	
317,10	**00100**

A detailed operating manual is available for download in the online shop next to the product.

SpinTools – Insert holder

▲ for single point finish boring heads Art. 62 303 ..., 62 308 ...

Scope of supply:

incl. Torx clamping screw for inserts, without fixing bolt for holder



90°



Extended 90°



95°



90°

90° extended



95°

D_{min} - D_{max} mm	D_{min} - D_{max} extended mm	DCONMS mm	Insert	62 318 ... EUR W4		62 318 ... EUR W4		62 320 ... EUR W4	
23,9 -31,1	29,9 - 37,1	11	CC.. 0602	165,40	**031**	199,50	**037**	184,50	**031**
30,9 - 40,1	37,9 - 47,1	13	CC.. 0602	184,50	**040**	218,60	**047**	200,90	**040**
39,9 - 51,1	47,9 - 59,1	17	CC.. 0602	200,90	**051**	240,50	**059**	221,40	**051**
50,9 - 67,1	64,9 - 81,1	22	CC.. 0602	218,60	**067**	261,00	**081**	229,60	**067**
66,9 - 87,1	84,9 - 105,1	30	CC.. 0602	239,10	**087**	281,50	**105**		
66,9 - 87,1		30	CC.. 09T3					261,00	**087**
86,9 - 116,1	104,9 - 134,1	30	CC.. 09T3	239,10	**116**	281,50	**134**		
	124,9 - 154,1	30	CC.. 09T3			329,30	**154**		

TORX® Screws

Key D

Spare parts Insert		62 950 ... EUR W7		80 950 ... EUR Y7	
CC.. 0602	M2,5x6	4,16	**022**	T07	10,05	**109**
CC.. 09T3	M4x9	5,04	**023**	T15	11,96	**113**

→ **Page 63**
Find suitable indexable inserts here.

A detailed operating manual is available for download in the online shop next to the product.

SpinTools – High-speed carbide boring tools

▲ Shaft extension for single point finish boring heads Art. No. 62 303 ..., 62 308 ...
▲ with thro' coolant supply

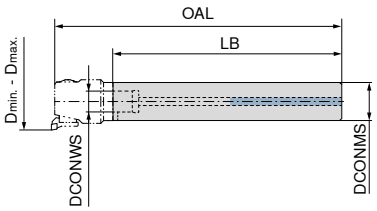

D_{min} - D_{max} mm	DCONWS mm	DCONMS mm	OAL mm	LB mm	WT kg	62 354 ... EUR W4	
23,9 - 31,1	11	20	250	210	0,81	1.650,00	**020**
30,9 - 40,1	14	25	306	261	1,54	2.256,00	**025**
39,9 - 51,1	18	32	380	315	3,03	3.530,00	**032**

SpinTools – Reverse adapter for back boring

▲ For insert holder article nos. 62 318 ... / 62 320 ...

Scope of supply:
Adapter including fixing bolt

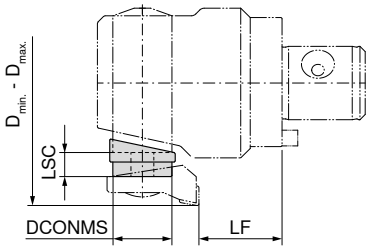

LSC mm	DCONMS mm	LF mm	D_{min} - D_{max} mm	62 321 ... EUR W4	
6,5	11	13,0	37 - 44	257,00	**044**
8,0	11	13,0	40 - 47	257,00	**051**
6,5	13	12,6	44 - 53	257,00	**053**
10,0	13	12,6	51 - 60	257,00	**060**
6,5	17	31,3	53 - 64	257,00	**064**
10,0	17	31,3	60 - 71	257,00	**071**
6,5	22	31,2	68 - 80	266,50	**080**
12,0	22	31,2	75 - 91	266,50	**091**
10,0	30	29,0	87 - 107	275,90	**107**

Note left hand direction of spindle rotation when in use

A detailed operating manual is available for download in the online shop next to the product.

Fillister-head screw

Spare parts for Article no.		62 950 ... EUR W7	
62 321 044	M4x12	8,66	**278**
62 321 051	M4x13	8,86	**279**
62 321 053	M5x14	8,66	**280**
62 321 060	M5x16	8,86	**281**
62 321 064	M6x15	8,66	**282**
62 321 071	M6x20	8,86	**283**
62 321 080	M8x20	8,66	**284**
62 321 091	M8x25	8,86	**285**
62 321 107	M10x30	10,05	**286**

Minimum diameter (Ø D1) during retraction for back boring

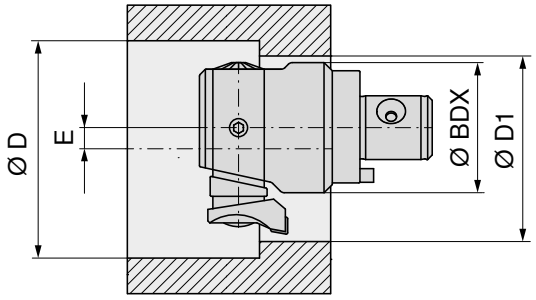

Minimum diameter (Ø D1) of the entry bore

$$Ø\,D1 = \frac{Ø\,BDX + Ø\,D}{2} + 1^*$$

Minimum offset (E) for starting

$$E = \frac{Ø\,D - Ø\,D1}{2} + 0{,}5^*$$

*Safety margin

Example

Single point finish boring head 62 303 031 (Ø BDX = 22,5 mm)	
Reverse adapter 62 321 044 (Ø D_{min} – Ø D_{max} = 37 – 44 mm)	**Selected** **Ø D = 37 mm**
Insert holder 62 318 031	

$$Ø\,D1 = \frac{Ø\,22{,}5\text{ mm} + Ø\,37\text{ mm}}{2} + 1\text{ mm} = 30{,}75\text{ mm}$$

$$E = \frac{Ø\,37\text{ mm} - Ø\,30{,}75\text{ mm}}{2} + 0{,}5\text{ mm} = 3{,}625\text{ mm}$$

SpinTools – Single point finish boring heads

▲ With internal coolant supply
▲ extremely stable connection between insert holder and boring head

Scope of supply:
Boring head, without insert holder, pressure plate and support

STM

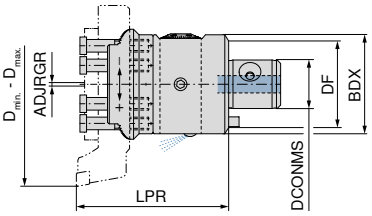

D_{min} - D_{max} mm	Adapter	DCONMS mm	BDX mm	DF mm	LPR mm	ADJRGR mm	WT kg	62 305 ... EUR W4	
86 - 402	STM 36	36	72	63	120	± 1,25	2,94	2.425,00	**302**

Cylindrical screw

Spare parts for Article no.		62 950 ... EUR W7	
62 305 302	M8x45	4,69	**292**

Screw for drivers

		62 950 ... EUR W7	
	M6x12	1,55	**167**

Driver

		62 950 ... EUR W7	
	16x26,5x8	51,09	**040**

Clamping screw ST

		62 950 ... EUR W7	
	M8x60	8,86	**011**

→ **Page 50–56**
Here you will find the suitable base adaptors.

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 9**
Here you will find a detailed system overview.

SpinTools – Boring set

▲ suitable for Ø 86 – Ø 402 mm
▲ supplied with Ø 86 – Ø 302 mm
▲ with thro' coolant

Scope of supply:
▲ 1 Case
▲ 1 single point finish boring head
– 62 305 302
▲ 3 insert holders
– 62 438 138 Ø 86 – Ø 138 mm
– 62 438 220 Ø 136 – Ø 220 mm
– 62 438 302 Ø 188 – Ø 302 mm
▲ 2 pressure plates and 2 supports
– 62 950 149
– 62 950 150
– 62 950 152
– 62 950 153
▲ 1 Allen Key – SW5
▲ 1 Torx Key – T15

D_{min} - D_{max} mm	Adapter	STM Modular 62 439 ... EUR W4	
86 - 302	STM 36	3.326,00	**999**

SpinTools – Tool holder

▲ for single point finish boring heads
▲ Approach angle 90°

Scope of supply:
incl. cover plate and support



D_{min} - D_{max} mm	Insert	62 438 ... EUR W4	
86 - 138	CC.. 09T3	526,00	**138**
136 - 220	CC.. 09T3	627,10	**220**
188 - 302	CC.. 09T3	786,90	**302**
242 - 402	CC.. 09T3	884,10	**402**

TORX® Screws

Key D

Pressure plate

Support

Spare parts for Article no.		62 950 ... EUR W7			80 950 ... EUR Y7		62 950 ... EUR W7		62 950 ... EUR W7	
62 438 138	M4x9	5,04	**023**	T15	11,96	**113**	91,96	**152**	68,19	**149**
62 438 220	M4x9	5,04	**023**	T15	11,96	**113**	103,90	**153**	76,92	**150**
62 438 302	M4x9	5,04	**023**	T15	11,96	**113**	103,90	**153**	76,92	**150**
62 438 402	M4x9	5,04	**023**	T15	11,96	**113**	103,90	**153**	76,92	**150**

→ **Page 63**
Find suitable indexable inserts here.

TwinKom – Base body

Scope of supply:

Clamping plate incl. adjustment and fixing screws
Order tool holder (+indexable insert) and indexable inserts separately

ABS



D_{min} - D_{max} mm	KOMET no.	DCONMS mm	DF mm	Adapter	LPR mm	LB mm	WT kg	long 62 870 ... EUR W4/6A		short 62 870 ... EUR W4/6A	
24 - 32	G01 70552	13	25	ABS 25	45	6,0	0,11			472,90	**03290**
24 - 32	G01 71072	16	32	ABS 32	70	7,0	0,21	489,50	**13289**		
30 - 41	G01 70562	13	25	ABS 25	50		0,12			472,90	**04190**
30 - 41	G01 71132	16	32	ABS 32	85	7,5	0,30	489,50	**14189**		
39 - 53	G01 71022	16	32	ABS 32	60		0,29			618,60	**05389**
39 - 53	G01 71622	20	40	ABS 40	120	8,0	0,68	632,90	**15388**		
51 - 71	G01 71522	20	40	ABS 40	60		0,44			632,90	**07188**
51 - 71	G01 72122	28	50	ABS 50	135	10,0	1,24	659,30	**17197**		
64 - 91	G01 72022	28	50	ABS 50	70		0,82			684,60	**09197**
64 - 91	G01 72622	34	63	ABS 63	155	13,0	2,25	760,70	**19196**		
83 - 124	G01 72522	34	63	ABS 63	70		1,35			685,80	**12496**
83 - 124	G01 73122	46	80	ABS 80	155	16,5	3,80	779,40	**12592**		
109 - 167	G01 73032	46	80	ABS 80	90		3,10			992,20	**16792**[1)]
109 - 167	G01 73042	46	80	ABS 80	175		6,20	1.107,00	**16892**[1)]		
139 - 215	G01 73562	56	100	ABS 100	125		6,47			1.044,00	**21591**[1)]
139 - 215	G01 73572	56	100	ABS 100	240		13,25	1.226,00	**21691**[1)]		

1) Diameter range can only be achieved with TwinKom basic tool holder (radially + axially adjustable) and corresponding indexable insert!

Adjustment screw

TwinKom clamping plate

Fixing screw

Spare parts D_{min} - D_{max}		10 950 ... EUR W7/6B		62 950 ... EUR W7/6B			10 950 ... EUR W7/6B	
24 - 32	M2,5X5.SW1,3	0,85	**16500**	76,99	**46900**	M2x4,5 - T06	3,28	**15800**
30 - 41	M2,5X5.SW1,3	0,85	**16500**	86,77	**47000**	M2,5x5,3 - T08	3,05	**15900**
39 - 53	M4x8 - SW2	1,11	**11100**	85,67	**47100**	M2,5x7 - T08	3,05	**16000**
51 - 71	M4x10 - SW2	1,11	**11200**	90,01	**47200**	M3,5x9,4 - T10	3,05	**16300**
64 - 91	M6X12 SW3	1,13	**16100**	103,00	**47300**	M4,5x11,5 - T15	2,99	**13500**
83 - 124	M6X20 SW3	1,13	**16200**	105,20	**47400**	M5x12 - SW2,5	1,11	**11000**
109 - 167	M8X20.SW4	2,07	**16600**	132,30	**47500**			
139 - 215	M10X20 DIN 913	3,47	**17500**	149,70	**47700**	M6x20 Sw5	1,08	**17600**

Cylindrical screw TwinKom

Cylindrical screw

Adjustment pin

Spare parts D_{min} - D_{max}		62 950 ... EUR W7/6B			62 950 ... EUR W7/6B		62 950 ... EUR W7/6B	
24 - 32	M3X16	0,81	**46000**				10,31	**46200**
30 - 41	M4X20	1,13	**45500**				10,31	**46300**
39 - 53	M5X25	1,13	**45600**				10,31	**46400**
51 - 71	M6X30	1,13	**45700**				10,31	**46500**
64 - 91	M8X35	1,13	**45800**				10,31	**46600**
83 - 124	M8X45	1,23	**45900**				10,31	**46700**
109 - 167	M10X50	2,07	**46100**	M5x16	1,13	**00000**	10,31	**46800**
139 - 215	M12x60	2,07	**47600**				11,60	**47800**

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 10**
Here you will find a detailed system overview.

TwinKom – Tool holder 90°

▲ radially adjustable
▲ Price per piece

Scope of supply:
including clamping screw
Order indexable inserts separately



D_{min} - D_{max} mm	KOMET no.	Insert	62 871 ... EUR W4/6A	
24 - 32	G03 70330	WO.X 0403..	191,80	**03200**
30 - 41	G03 70141	WO.X 05T3..	191,80	**04100**
39 - 53	G03 70230	WO.X 05T3..	186,40	**05300**
51 - 71	G03 70240	WO.X 06T3..	195,80	**07100**
64 - 91	G03 70250	WO.X 0804..	207,80	**09100**
83 - 124	G03 70260	WO.X 1005..	225,20	**12400**

TwinKom – Tool holder 80°

▲ radially adjustable
▲ Price per piece

Scope of supply:
including clamping screw
Order indexable inserts separately





D_{min} - D_{max} mm	KOMET no.	Insert	62 875 ... EUR W4/6A	
24 - 32	G03 80310	WO.X 0403..	191,80	**03200**
30 - 41	G03 80021	WO.X 05T3..	191,80	**04100**
39 - 53	G03 80090	WO.X 05T3..	186,40	**05300**
51 - 71	G03 80100	WO.X 06T3..	195,80	**07100**
64 - 91	G03 80110	WO.X 0804..	207,80	**09100**
83 - 124	G03 80120	WO.X 1005..	225,20	**12400**

Clamping screw

Spare parts D_{min} - D_{max}		10 950 ... EUR W7/6B	
24 - 32	M2,2x5,5 - 06IP	2,99	**10700**
30 - 41	M2,5x7,2 - 08IP	2,99	**10500**
39 - 53	M2,5x7,2 - 08IP	2,99	**10500**
51 - 71	M3,5x7,3 - 10IP	2,99	**10600**
64 - 91	M4,5x9 - 15IP	2,66	**12700**
83 - 124	M4,5x9 - 15IP	2,66	**12700**

→ **Page 60+61**
Find suitable indexable inserts here.

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

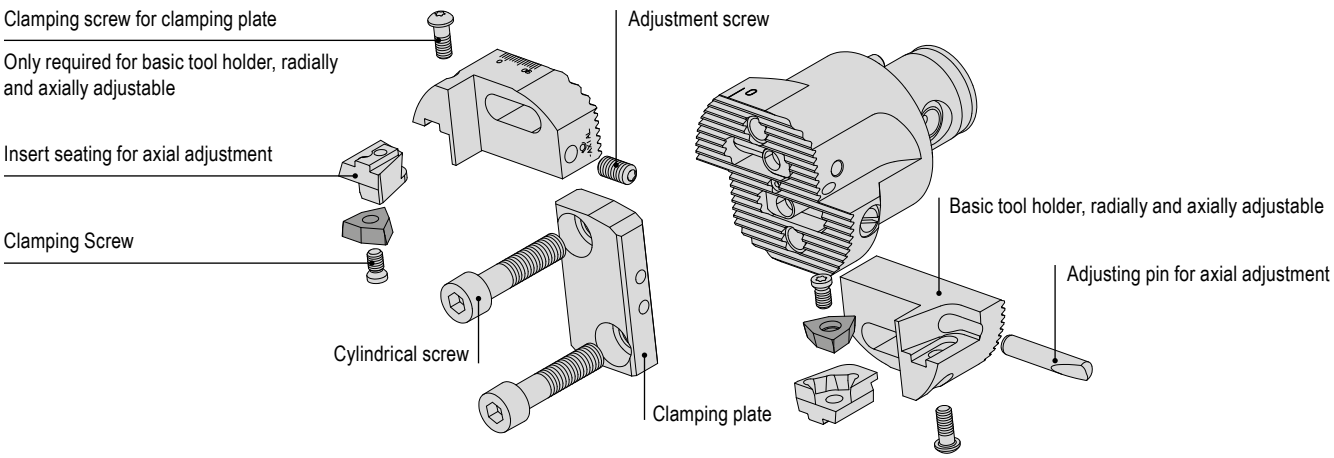

TwinKom – Basic tool holder, radially and axially adjustable

▲ Price per piece

Scope of supply:

Order indexable insert seats and indexable inserts separately





D_{min} - D_{max} mm	KOMET no.	62 872 ... EUR W4/6A	
24 - 32	G03 70011	207,80	03200
30 - 41	G03 70021	207,80	04100
39 - 53	G03 70031	219,90	05300
51 - 71	G03 70041	226,70	07100
64 - 91	G03 70061	270,90	09100
83 - 124	G03 70071	332,50	12400
109 - 167	G03 70081	351,40	16700
139 - 215	G03 70091	496,10	21500

TwinKom – Indexable insert, 90°

▲ axially adjustable
▲ Price per piece

Scope of supply:

including clamping screw
Order indexable inserts separately



D_{min} - D_{max} mm	KOMET no.	Insert	62 873 ... EUR 2B/6#	
24 - 32	D54 60510	WO.X 0302..	132,20	03200
30 - 41	D54 60520	WO.X 0403..	150,20	04100
39 - 53	D54 60030	WO.X 05T3..	160,90	05300
51 - 71	D54 60040	WO.X 06T3..	174,40	07100
64 - 91	D54 60050	WO.X 0804..	179,80	09100
83 - 167	D54 60060	WO.X 1005..	198,40	12400
139 - 215	D54 60070	WO.X 1206..	223,90	21500

TwinKom – Indexable insert, 80°

▲ axially adjustable
▲ Price per piece

Scope of supply:

including clamping screw
Order indexable inserts separately



D_{min} - D_{max} mm	KOMET no.	Insert	62 874 ... EUR 2B/6#	
24 - 32	D54 60610	WO.X 0302..	132,20	03200
30 - 41	D54 60620	WO.X 0403..	150,20	04100
39 - 53	D54 60130	WO.X 05T3..	160,90	05300
51 - 71	D54 60140	WO.X 06T3..	174,40	07100
64 - 91	D54 60150	WO.X 0804..	179,80	09100
83 - 167	D54 60160	WO.X 1005..	198,40	16700
139 - 215	D54 60170	WO.X 1206..	223,90	21500

Clamping screw

Spare parts D_{min} - D_{max}		10 950 ... EUR W7/6B	
24 - 32	M2,0x4,3 - 06IP	2,99	10000
30 - 41	M2,2x5,5 - 06IP	2,99	10700
39 - 53	M2,5x6,3 - 08IP	2,99	10800
51 - 71	M3,5x6,6 - 10IP	3,05	16400
64 - 91	M4,5x9 - 15IP	2,66	12700
83 - 167	M4,5x9 - 15IP	2,66	12700
139 - 215	M5,5x11 - 20IP	2,71	17400

SpinTools – Boring heads for roughing with 2 cutting edges

▲ with thro' coolant

Scope of supply:

Boring head incl. drive dog, fixing screws, spring rings, drive dog screw and stop pin

STM

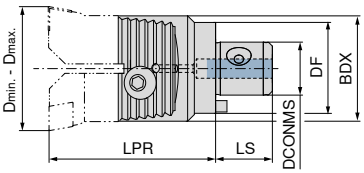

D_{min} - D_{max} mm	Adapter	DCONMS mm	BDX mm	DF mm	LPR mm	LS mm	WT kg	62 295 ...	EUR W4	
23,5 - 30,5	STM 11	11	20	20	40	13	0,05		347,10	**030**
29,5 - 40,1	STM 14	14	25	25	45	16	0,09		373,00	**040**
39,5 - 50,5	STM 18	18	32	32	65	20	0,25		403,10	**050**
49,5 - 66,5	STM 22	22	42	40	72	24	0,38		455,00	**066**
65,5 - 87,5	STM 28	28	55	50	82	30	0,59		532,90	**087**

Fillister-head screw

Spring ring

Location Pin

Spare parts for Article no.		62 950 ... EUR W7			62 950 ... EUR W7		62 950 ... EUR W7	
62 295 030	M4x8	2,95	**298**	Ø 4,3/7,3	0,89	**311**	8,66	**231**
62 295 040	M5x12	2,95	**293**	Ø 5,3/9,3	0,89	**312**	8,66	**231**
62 295 050	M6x16	2,95	**294**	Ø 6.4/10,2	0,89	**313**	8,66	**231**
62 295 066	M8x20	2,95	**295**	Ø 8,4/14,0	0,89	**314**	9,19	**234**
62 295 087	M10x25	3,30	**296**	Ø 10,5/17,0	0,89	**315**	9,19	**234**

Screw for drivers

Driver

Spare parts for Article no.		62 950 ... EUR W7			62 950 ... EUR W7	
62 295 030	M2x2,5	0,89	**162**	5x8,5x3	27,07	**035**
62 295 040	M2,5x6	0,89	**163**	6x10,3x4	28,14	**036**
62 295 050	M3x8	1,22	**164**	8x15x5	30,19	**037**
62 295 066	M4x10	1,22	**165**	10x18,1x6	34,30	**038**
62 295 087	M5x10	1,55	**166**	12x20x6	40,31	**039**

→ **Page 50–56**
Here you will find the suitable base adaptors.

A detailed operating manual is available for download in the online shop next to the product.

→ **Page 10**
Here you will find a detailed system overview.

SpinTools – Pair of tool holders, standard, 90°

Scope of supply:
Adjustment screws, positioning pin, insert clamping screws



		62 296 ...	
D_{min} - D_{max} mm	Insert	EUR W4	
23,5 - 30,5	CC.. 0602	403,10	**030**
29,5 - 40,1	CC.. 0602	416,70	**040**
39,5 - 50,5	CC.. 09T3	446,70	**050**
49,5 - 66,5	CC.. 09T3	511,00	**066**
65,5 - 87,5	CN.. 1204	664,00	**088**
65,5 - 87,5	CC.. 1204	638,10	**087**

SpinTools – Pair of tool holders, standard, 70°

Scope of supply:
Adjustment screws, positioning pin, insert clamping screws



		62 299 ...	
D_{min} - D_{max} mm	Insert	EUR W4	
23,5 - 30,5	CC.. 0602	403,10	**030**
29,5 - 40,1	CC.. 0602	416,70	**040**
39,5 - 50,5	CC.. 09T3	446,70	**050**
49,5 - 66,5	CC.. 09T3	511,00	**066**
65,5 - 87,5	CN.. 1204	664,00	**088**
65,5 - 87,5	CC.. 1204	638,10	**087**

TORX® Screws

Key D

Adjustment screw

Spare parts			62 950 ...			80 950 ...			62 950 ...	
D_{min} - D_{max}	Insert		EUR W7			EUR Y7			EUR W7	
23,5 - 30,5	CC.. 0602	M2,5x6	4,16	**022**	T07	10,05	**109**	M4x0,5x7	6,59	**238**
29,5 - 40,1	CC.. 0602	M2,5x6	4,16	**022**	T07	10,05	**109**	M4x0,5x9,5	6,74	**239**
39,5 - 50,5	CC.. 09T3	M4x9	5,04	**023**	T15	11,96	**113**	M4x0,5x13	7,13	**240**
49,5 - 66,5	CC.. 09T3	M4x9	5,04	**023**	T15	11,96	**113**	M6x14	1,55	**241**
65,5 - 87,5	CC.. 1204	M5x10	5,58	**232**	T20	12,83	**114**	M6x20	1,55	**242**

Shim

Elbow lever screw

Lever

Carbide type C

Adjustment screw

Spare parts		62 950 ...		62 950 ...		62 950 ...		62 950 ...		62 950 ...	
D_{min} - D_{max}	Insert	EUR W7		EUR W7		EUR W7		EUR W7		EUR W7	
65,5 - 87,5	CN.. 1204	2,08	**096**	7,46	**136**	20,91	**125**	18,72	**117**	M6x20	1,55	**242**

→ **Page 63**
Find suitable indexable inserts here.

A detailed operating manual is available for download in the online shop next to the product.

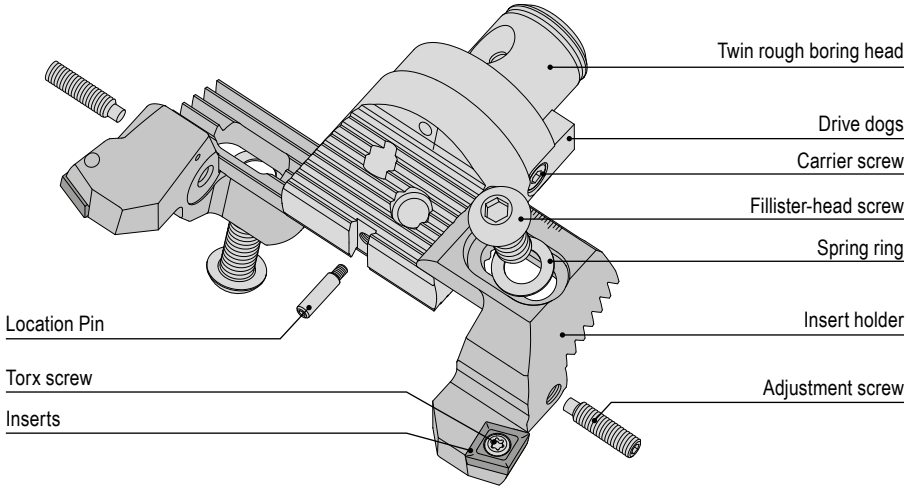

SpinTools – Pair of tool holders, ‘Synchro’, 90°

Scope of supply:
Insert clamping screws, synchronization screw



D_{min} - D_{max} mm	Insert		62 297 ... EUR W4	
23,5 - 30,5	CC.. 0602		459,10	**030**
29,5 - 40,1	CC.. 0602		481,00	**040**
39,5 - 50,5	CC.. 09T3		513,70	**050**
49,5 - 66,5	CC.. 09T3		583,40	**066**
65,5 - 87,5	CC.. 1204		761,00	**087**

TORX® Screws

Synchronization screw

Key D

Spare parts for Article no.		62 950 ... EUR W7			62 950 ... EUR W7			80 950 ... EUR Y7	
62 297 030	M2,5x6	4,16	**022**	M4x0,5x18	50,56	**207**	T07	10,05	**109**
62 297 040	M2,5x6	4,16	**022**	M4x0,5x23	51,38	**208**	T07	10,05	**109**
62 297 050	M4x9	5,04	**023**	M4x0,5x30	51,78	**209**	T15	11,96	**113**
62 297 066	M4x9	5,04	**023**	M6x40	53,29	**210**	T15	11,96	**113**
62 297 087	M5x10	5,58	**232**	M6x52	54,94	**211**	T20	12,83	**114**

→ **Page 63**
Find suitable indexable inserts here.

A detailed operating manual is available for download in the online shop next to the product.

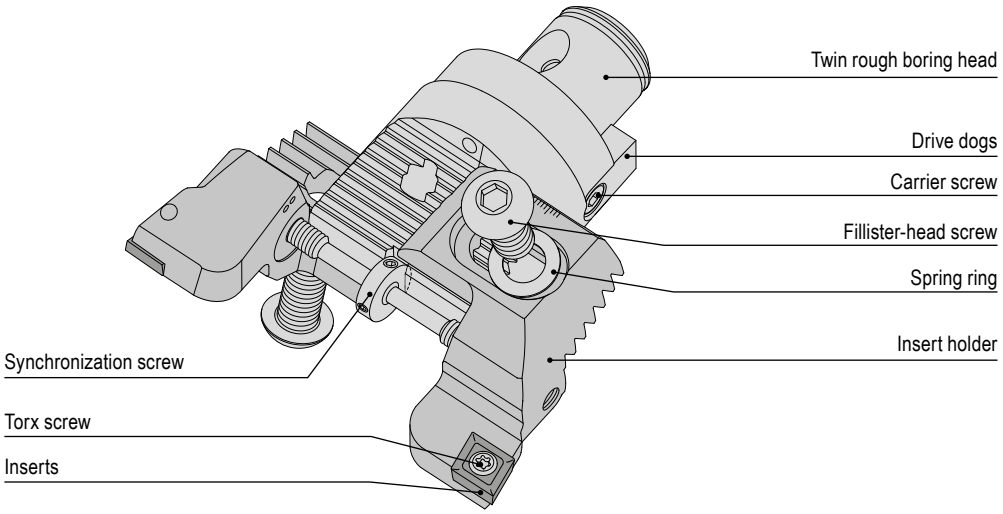

SpinTools – Base adapters ISO 7388-1 (DIN 69871)

STM

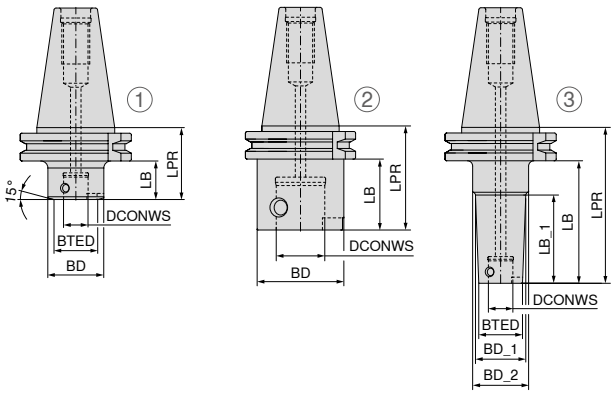

SK

62 107 ...

	Adapter	Fig.	SZID	DCONWS mm	BTED mm	BD mm	BD_1 mm	BD_2 mm	LPR mm	LB mm	LB_1 mm	WT kg	EUR W4	
short	SK 40	1	STM 11	11	20	32			40	20,9		0,91	359,40	111 [1]
	SK 40	1	STM 14	14	25	32			40	20,9		0,93	359,40	114 [1]
	SK 40	2	STM 18	18		32			40	20,9		0,89	359,40	118
	SK 40	2	STM 22	22		40			50	30,9		1,02	359,40	122
	SK 40	2	STM 28	28		50			50	30,9		1,11	359,40	128
	SK 40	2	STM 36	36		63			60	40,9		1,27	332,00	136
	SK 50	2	STM 28	28		50			50	30,9		2,92	425,00	428
	SK 50	2	STM 36	36		63			63	43,9		3,27	425,00	436
long	SK 40	3	STM 11	11	20		23	32	80	60,9	40,9	1,04	403,10	211 [1]
	SK 40	3	STM 14	14	25		28	32	80	60,9	40,9	1,07	403,10	214 [1]
	SK 40	2	STM 18	18		32			80	60,9		1,13	403,10	218
	SK 40	2	STM 22	22		40			100	80,9		1,47	403,10	222
	SK 40	2	STM 28	28		50			100	80,9		1,84	403,10	228
	SK 40	2	STM 36	36		63			120	100,9		2,68	403,10	236
	SK 50	2	STM 36	36		63			120	100,9		4,60	481,00	536

1) Note! BD/BD_1 is larger than BTED, which may lead to a limited bore depth!

O-Ring

Clamping screw ST

Spare parts DCONWS		**62 950 ...** EUR W7			**62 950 ...** EUR W7	
11	9x1,5	2,08	254	M4x0,5x6	9,53	026
14	12x1,5	2,08	255	M5x0,5x7,5	9,72	027
18	16x1,5	2,08	256	M6x0,75x9,5	10,40	028
22	19x2	2,08	257	M8x0,75x12	11,63	029
28	25x2	2,08	258	M10x1x14,2	13,34	030
36	33x2	2,08	259	M12x1x18	17,08	031

Suitable pull studs can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

ABS base adapters can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

SpinTools – Base adapters ISO 7388-2 (JIS B 6339 / MAS-BT)

▲ form B available upon request

STM

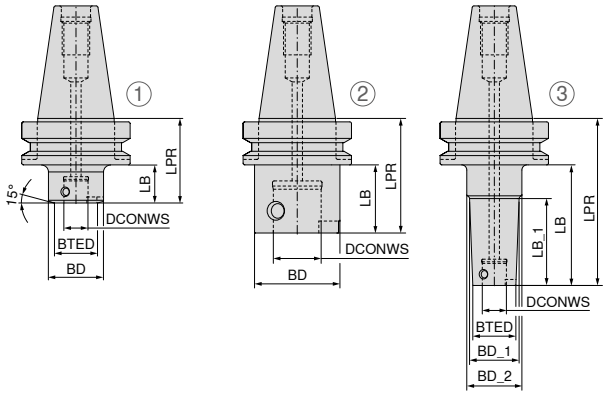

MAS-BT

62 112 ...

	Adapter	Fig.	SZID	DCONWS mm	BTED mm	BD mm	BD_1 mm	BD_2 mm	LPR mm	LB mm	LB_1 mm	WT kg	EUR W4	
short	BT 30	2	STM 28	28		50			55			0,64	367,60	**328**
	BT 40	1	STM 11	11	20	32			50	23		1,09	359,40	**111** 1)
	BT 40	1	STM 14	14	25	32			50	23		1,08	359,40	**114** 1)
	BT 40	2	STM 18	18		32			50	23		1,06	359,40	**118**
	BT 40	2	STM 22	22		40			50	23		1,10	359,40	**122**
	BT 40	2	STM 28	28		50			50	23		1,14	359,40	**128**
	BT 40	2	STM 36	36		63			60	33		1,38	332,00	**136**
	BT 50	2	STM 28	28		50			63	25		3,75	425,00	**428**
	BT 50	2	STM 36	36		63			63	25		3,78	425,00	**436**
long	BT 40	3	STM 11	11	20		23	32	90	63	43	1,20	403,10	**211** 1)
	BT 40	3	STM 14	14	25		28	32	90	63	43	1,24	403,10	**214** 1)
	BT 40	2	STM 18	18		32			90	63		1,30	403,10	**218**
	BT 40	2	STM 22	22		40			100	73		1,57	403,10	**222**
	BT 40	2	STM 28	28		50			100	73		1,87	403,10	**228**
	BT 40	2	STM 36	36		63			120	93		2,78	403,10	**236**
	BT 50	2	STM 36	36		63			120	82		5,18	481,00	**536**

1) Note! BD/BD_1 is larger than BTED, which may lead to a limited bore depth!

O-Ring

Clamping screw ST

Spare parts DCONWS						
		62 950 ...			**62 950 ...**	
		EUR W7			EUR W7	
11	9x1,5	2,08	**254**	M4x0,5x6	9,53	**026**
14	12x1,5	2,08	**255**	M5x0,5x7,5	9,72	**027**
18	16x1,5	2,08	**256**	M6x0,75x9,5	10,40	**028**
22	19x2	2,08	**257**	M8x0,75x12	11,63	**029**
28	25x2	2,08	**258**	M10x1x14,2	13,34	**030**
36	33x2	2,08	**259**	M12x1x18	17,08	**031**

Suitable pull studs can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

ABS base adapters can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

SpinTools – Base adapters HSK-A ISO 12164-1 (DIN 69893-1)

STM

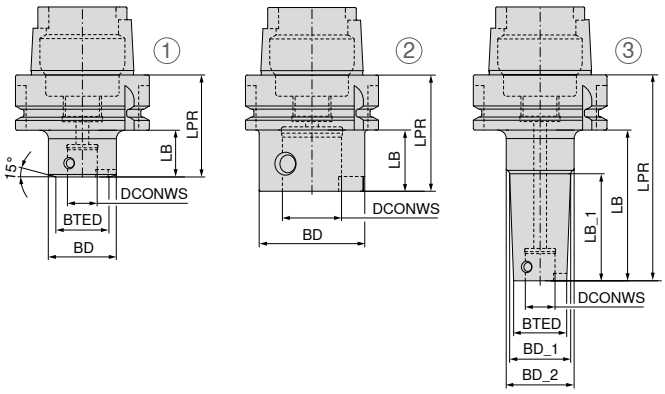

HSK-A

62 122 ...

	Adapter	Fig.	SZID	DCONWS mm	BTED mm	BD mm	BD_1 mm	BD_2 mm	LPR mm	LB mm	LB_1 mm	WT kg	EUR W4	
short	HSK-A 63	1	STM 11	11	20	32			50	24		0,77	425,00	**111** [1]
	HSK-A 63	1	STM 14	14	25	32			50	24		0,76	425,00	**114** [1]
	HSK-A 63	2	STM 18	18		32			50	24		0,74	425,00	**118**
	HSK-A 63	2	STM 22	22		40			50	24		0,79	425,00	**122**
	HSK-A 63	2	STM 28	28		50			55	24		0,91	425,00	**128**
	HSK-A 63	2	STM 36	36		63			65	34		1,10	385,40	**136**
	HSK-A 100	2	STM 28	28		50			63	34		2,32	493,30	**428**
	HSK-A 100	2	STM 36	36		63			70	34		2,61	493,30	**436**
long	HSK-A 63	3	STM 11	11	20		23	32	90	64	44	0,87	465,90	**211** [1]
	HSK-A 63	3	STM 14	14	25		28	32	90	64	44	0,93	465,90	**214** [1]
	HSK-A 63	2	STM 18	18		32			90	64		0,98	465,90	**218**
	HSK-A 63	2	STM 22	22		40			100	74		1,26	465,90	**222**
	HSK-A 63	2	STM 28	28		50			100	74		1,58	465,90	**228**
	HSK-A 63	2	STM 36	36		63			120	94		2,41	493,30	**236**

1) Note! BD/BD_1 is larger than BTED, which may lead to a limited bore depth!

O-Ring

Clamping screw ST

Spare parts DCONWS		62 950 ... EUR W7			62 950 ... EUR W7	
11	9x1,5	2,08	**254**	M4x0,5x6	9,53	**026**
14	12x1,5	2,08	**255**	M5x0,5x7,5	9,72	**027**
18	16x1,5	2,08	**256**	M6x0,75x9,5	10,40	**028**
22	19x2	2,08	**257**	M8x0,75x12	11,63	**029**
28	25x2	2,08	**258**	M10x1x14,2	13,34	**030**
36	33x2	2,08	**259**	M12x1x18	17,08	**031**

ABS base adapters can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

SpinTools – Reductions

▲ with thro' coolant

STM

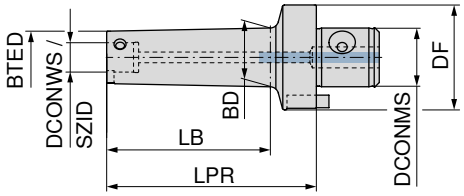

Adapter	LPR mm	SZID	DCONMS mm	DCONWS mm	DF mm	BTED mm	BD mm	LB mm	WT kg	62 357 ... EUR W4	
STM 14	30	STM 11	14	11	25	20	23	15	0,04	198,20	**111**
STM 18	30	STM 11	18	11	32	20	23	17	0,14	198,20	**211**
STM 18	30	STM 14	18	14	32	25	28	17	0,16	198,20	**214**
STM 22	30	STM 11	22	11	40	20	23	15	0,21	203,50	**311**
STM 22	30	STM 14	22	14	40	25	28	15	0,22	203,50	**314**
STM 22	30	STM 18	22	18	40	32	37	15	0,25	203,50	**318**
STM 28	40	STM 11	28	11	50	20	23	20	0,44	213,30	**411**
STM 28	40	STM 14	28	14	50	25	28	20	0,49	213,30	**414**
STM 28	40	STM 18	28	18	50	32	37	20	0,45	213,30	**418**
STM 28	40	STM 22	28	22	50	40	46	20	0,55	213,30	**422**
STM 36	40	STM 11	36	11	63	20	22	16	0,82	228,20	**511**
STM 36	70	STM 11	36	11	63	20	23	42	0,90	245,80	**811**
STM 36	95	STM 11	36	11	63	20	23	71	0,98	266,50	**611**
STM 36	115	STM 11	36	11	63	20	23	87	1,02	293,80	**911**
STM 36	135	STM 11	36	11	63	20	23	111	1,08	319,70	**711**
STM 36	40	STM 14	36	14	63	25	27	16	0,84	228,20	**514**
STM 36	80	STM 14	36	14	63	25	28	52	1,00	259,50	**814**
STM 36	120	STM 14	36	14	63	25	28	96	1,16	292,40	**614**
STM 36	145	STM 14	36	14	63	25	28	117	1,27	319,70	**914**
STM 36	170	STM 14	36	14	63	25	28	146	1,38	347,10	**714**
STM 36	40	STM 18	36	18	63	32	37	16	0,85	228,20	**518**
STM 36	100	STM 18	36	18	63	32	38	74	1,24	275,90	**818**
STM 36	150	STM 18	36	18	63	32	38	126	1,66	306,10	**918**
STM 36	207	STM 18	36	18	63	32	38	183	2,07	403,10	**618**
STM 36	40	STM 22	36	22	63	40	46	16	0,89	228,20	**522**
STM 36	120	STM 22	36	22	63	40	48	95	1,76	299,30	**822**
STM 36	183	STM 22	36	22	63	40	48	159	2,52	373,00	**622**
STM 36	263	STM 22	36	22	63	40	48	239	3,44	532,90	**722**
STM 36	40	STM 28	36	28	63	50	58	21	1,03	228,20	**528**
STM 36	140	STM 28	36	28	63	50	60	117	2,70	312,90	**828**
STM 36	233	STM 28	36	28	63	50	60	209	4,41	507,00	**628**
STM 36	333	STM 28	36	28	63	50	60	309	6,25	694,20	**728**

ABS reductions can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

Reductions – Spare Parts

		O-Ring			Screw for drivers			Driver			Clamping screw ST		
		62 950 ...			62 950 ...			62 950 ...			62 950 ...		
Spare parts for Article no.		EUR W7			EUR W7			EUR W7			EUR W7		
62 357 111	9x1,5	2,08	**254**	M2,5x6	0,89	**163**	6x10,3x4	28,14	**036**	M4x0,5x6	9,53	**026**
62 357 211	9x1,5	2,08	**254**	M3x8	1,22	**164**	8x15x5	30,19	**037**	M4x0,5x6	9,53	**026**
62 357 214	12x1,5	2,08	**255**	M3x8	1,22	**164**	8x15x5	30,19	**037**	M5x0,5x7,5	9,72	**027**
62 357 311	9x1,5	2,08	**254**	M4x10	1,22	**165**	10x18,1x6	34,30	**038**	M4x0,5x6	9,53	**026**
62 357 314	12x1,5	2,08	**255**	M4x10	1,22	**165**	10x18,1x6	34,30	**038**	M5x0,5x7,5	9,72	**027**
62 357 318	16x1,5	2,08	**256**	M4x10	1,22	**165**	10x18,1x6	34,30	**038**	M6x0,75x9,5	10,40	**028**
62 357 411	9x1,5	2,08	**254**	M5x10	1,55	**166**	12x20x6	40,31	**039**	M4x0,5x6	9,53	**026**
62 357 414	12x1,5	2,08	**255**	M5x10	1,55	**166**	12x20x6	40,31	**039**	M5x0,5x7,5	9,72	**027**
62 357 418	16x1,5	2,08	**256**	M5x10	1,55	**166**	12x20x6	40,31	**039**	M6x0,75x9,5	10,40	**028**
62 357 422	19x2	2,08	**257**	M5x10	1,55	**166**	12x20x6	40,31	**039**	M8x0,75x12	11,63	**029**
62 357 511	9x1,5	2,08	**254**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M4x0,5x6	9,53	**026**
62 357 811	9x1,5	2,08	**254**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M4x0,5x6	9,53	**026**
62 357 611	9x1,5	2,08	**254**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M4x0,5x6	9,53	**026**
62 357 911	9x1,5	2,08	**254**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M4x0,5x6	9,53	**026**
62 357 711	9x1,5	2,08	**254**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M4x0,5x6	9,53	**026**
62 357 514	12x1,5	2,08	**255**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M5x0,5x7,5	9,72	**027**
62 357 814	12x1,5	2,08	**255**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M5x0,5x7,5	9,72	**027**
62 357 614	12x1,5	2,08	**255**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M5x0,5x7,5	9,72	**027**
62 357 914	12x1,5	2,08	**255**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M5x0,5x7,5	9,72	**027**
62 357 714	12x1,5	2,08	**255**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M5x0,5x7,5	9,72	**027**
62 357 518	16x1,5	2,08	**256**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M6x0,75x9,5	10,40	**028**
62 357 818	16x1,5	2,08	**256**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M6x0,75x9,5	10,40	**028**
62 357 918	16x1,5	2,08	**256**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M6x0,75x9,5	10,40	**028**
62 357 618	16x1,5	2,08	**256**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M6x0,75x9,5	10,40	**028**
62 357 522	19x2	2,08	**257**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M8x0,75x12	11,63	**029**
62 357 822	19x2	2,08	**257**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M8x0,75x12	11,63	**029**
62 357 622	19x2	2,08	**257**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M8x0,75x12	11,63	**029**
62 357 722	19x2	2,08	**257**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M8x0,75x12	11,63	**029**
62 357 528	25x2	2,08	**258**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x1x14,2	13,34	**030**
62 357 828	25x2	2,08	**258**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x1x14,2	13,34	**030**
62 357 628	25x2	2,08	**258**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x1x14,2	13,34	**030**
62 357 728	25x2	2,08	**258**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M10x1x14,2	13,34	**030**

SpinTools – Extensions

▲ with thro' coolant

STM

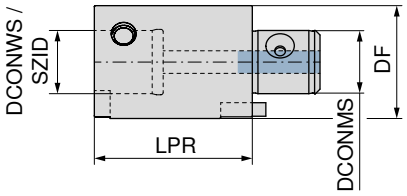

Adapter	LPR mm	SZID	DCONWS mm	DF mm	DCONMS mm	WT kg	62 351 ... EUR W4	
STM 11	25	STM 11	11	20	11	0,06	187,30	**111**
STM 11	35	STM 11	11	20	11	0,09	187,30	**211**
STM 14	30	STM 14	14	25	14	0,11	187,30	**114**
STM 14	45	STM 14	14	25	14	0,17	187,30	**214**
STM 18	40	STM 18	18	32	18	0,23	199,50	**118**
STM 18	60	STM 18	18	32	18	0,35	199,50	**218**
STM 22	50	STM 22	22	40	22	0,45	213,30	**122**
STM 22	80	STM 22	22	40	22	0,73	213,30	**222**
STM 28	50	STM 28	28	50	28	0,71	213,30	**128**
STM 28	75	STM 28	28	50	28	1,07	228,20	**228**
STM 28	100	STM 28	28	50	28	1,44	240,50	**328**
STM 36	60	STM 36	36	63	36	1,33	228,20	**136**
STM 36	90	STM 36	36	63	36	2,02	252,70	**236**
STM 36	120	STM 36	36	63	36	2,72	281,50	**336**

O-Ring

Screw for drivers

Driver

Clamping screw ST

Spare parts DCONWS		62 950 ... EUR W7			62 950 ... EUR W7			62 950 ... EUR W7			62 950 ... EUR W7	
11	9x1,5	2,08	**254**	M2x2,5	0,89	**162**	5x8,5x3	27,07	**035**	M4x0,5x6	9,53	**026**
14	12x1,5	2,08	**255**	M2,5x6	0,89	**163**	6x10,3x4	28,14	**036**	M5x0,5x7,5	9,72	**027**
18	16x1,5	2,08	**256**	M3x8	1,22	**164**	8x15x5	30,19	**037**	M6x0,75x9,5	10,40	**028**
22	19x2	2,08	**257**	M4x10	1,22	**165**	10x18,1x6	34,30	**038**	M8x0,75x12	11,63	**029**
28	25x2	2,08	**258**	M5x10	1,55	**166**	12x20x6	40,31	**039**	M10x1x14,2	13,34	**030**
36	33x2	2,08	**259**	M6x12	1,55	**167**	16x26,5x8	51,09	**040**	M12x1x18	17,08	**031**

ABS extensions can be found in → **Clamping technology catalogue, Chapter 16, Adapters and accessories.**

SpinTools – ABS/STM adapters

▲ using this adapter, ABS core drilling and precision spindle systems can be accommodated reliably and precisely in STM base adapters
▲ with thro' coolant supply

STM

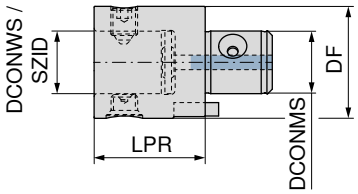

NEW

Adapter	LPR mm	SZID	DCONWS mm	DF mm	DCONMS mm	62 359 ... EUR W4/6A	
STM 14	35	ABS 25	13	25	14	279,10	**02519**
STM 18	40	ABS 32	16	32	18	280,90	**03218**
STM 22	45	ABS 40	20	40	22	321,60	**04017**
STM 28	50	ABS 50	28	50	28	349,00	**05016**
STM 36	60	ABS 63	34	63	36	379,10	**06315**

Clamping screw

Driver

Spare parts DCONWS	62 950 ... EUR XX		62 950 ... EUR W7	
13			28,14	**036**
16	12,08	**13989**	30,19	**037**
20			34,30	**038**
28			40,31	**039**
34			51,09	**040**

MicroKom – STM/ABS adapters

▲ using this adapter, STM core drilling and precision spindle systems can be accommodated reliably and precisely in ABS base adapters
▲ with thro' coolant supply

ABS

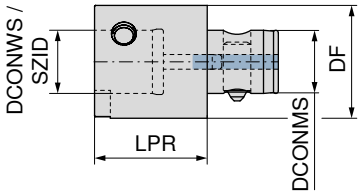

NEW

Adapter	LPR mm	SZID	DCONWS mm	DF mm	DCONMS mm	62 359 ... EUR W4/6A	
ABS 25	30	STM 14	14	25	13	279,10	**02590**
ABS 32	40	STM 18	18	32	16	280,90	**03289**
ABS 40	40	STM 22	22	40	20	321,60	**04088**
ABS 50	50	STM 28	28	50	28	349,00	**05097**
ABS 63	60	STM 36	36	63	34	379,10	**06396**

Clamping screw ST

Spare parts DCONWS	62 950 ... EUR W7	
14	9,72	**027**
18	10,40	**028**
22	11,63	**029**
28	13,34	**030**
36	17,08	**031**

WOHX

Designation	L mm	S mm	D1 mm	IC mm
WOHX 02T0..	2,6	1,20	2	4



WOHX

ISO	KOMET no.	RE mm	-G12 BK2710		-G12 BK8440		-G12 K10	
			F WOHX		F WOHX		F WOHX	
			62 600 ...		62 600 ...		62 600 ...	
			EUR 1A/3#		EUR 1A/3#		EUR 1A/3#	
02T001EL	W00 04120.018440	0,1			32,80	**00102**		
02T001EL	W00 04120.012710	0,1	32,80	**10102**				
02T001FL	W00 04120.0121	0,1					26,95	**20102**
P			●		●			
M			●		●			
K			●		●			
N							●	
S			●				●	
H					●			
O							●	

→ v_c Page 65

Material group	Guideline recommendation Grade	Chip groove
P	BK8440	-G12
M	BK8440	-G12
K	BK2710	-G12
N	K10	-G12
S	K10	-G12
H1.1	BK8440	-G12
O	K10	-G12

The guideline recommendation shown here is based on experience and serves only to make it easy to find the correct indexable insert for your application.

Additional indexable inserts can be found in our online shop at cuttingtools.ceratizit.com

TOGX

Designation	L	S	D1	IC
	mm	mm	mm	mm
TOGX 06T1..	6,64	1,80	2,2	4,0
TOGX 0902..	9,12	2,50	2,8	5,6
TOGX 1403..	13,62	3,00	3,8	8,2



TOGX

			-18 CK32	-14 CK3230	-14 BK60	-14 BK8430	-12 BK7710	-12 K10
			F	F	F	F	F	F
			CERMET TOGX	CERMET TOGX	TOGX	TOGX	TOGX	TOGX
			62 607 ...	62 606 ...	62 601 ...	62 601 ...	62 601 ...	62 601 ...
ISO	KOMET no.	RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
06T102EN	W57 04140.0260	0,2			25,38 90206			
06T102EN	W57 04140.028430	0,2				25,28 30201		
06T102EN	W57 04140.023230	0,2		25,28 10201				
06T102EN	W57 04180.0432	0,4	25,28 20401					
06T102FN	W57 04120.027710	0,2					33,09 70201	
06T102FN	W57 04120.0223	0,2						25,38 50206
090202EN	W57 14140.028430	0,2				27,75 33801		
090204EN	W57 14140.0460	0,4			27,80 70409			
090204EN	W57 14140.043230	0,4		27,75 11401				
090204EN	W57 14180.0432	0,4	27,75 21401					
090204FN	W57 14120.047710	0,4					35,96 70401	
090204FN	W57 14120.0423	0,4						27,80 50409
140302EN	W57 26140.028430	0,2				39,23 34401		
140304EN	W57 26140.0460	0,4			39,27 70414			
140304EN	W57 26140.043230	0,4		39,23 12601				
140304EN	W57 26180.0432	0,4	39,23 22601					
140304FN	W57 26120.047710	0,4					55,37 71401	
140304FN	W57 26120.0423	0,4						45,03 50414
P			●	●	●	○		
M			●	●	●	○		
K					●	○		
N							●	●
S						●	○	●
H						●	○	
O							○	●

→ v_c Page 65

TOGX / TOEX / TOHX

Designation	L	S	D1	IC	LE
	mm	mm	mm	mm	mm
TO.X 06T1..	6,64	1,80	2,2	4,0	1,8
TO.X 0902..	9,12	2,50	2,8	5,6	2,7
TO.X 1403..	13,62	3,00	3,8	8,2	2,7
TOHX 06T1..	6,50	1,80	2,2	4,0	1,0
TOHX 0902..	9,12	2,50	2,8	5,6	2,5
TOHX 1403..	13,62	3,00	3,8	8,2	4,5





TOGX / TOEX / TOHX

	CBN40	CTDPU20	-G12 BK8425	-G06 BK2710	-G06 BK6110	-G06 BK7615
	F	F	F	F	F	F
	TOGX	DIAMOND TOEX	TOHX	TOHX	TOHX	TOHX
	62 601 ...	62 605 ...	62 603 ...	62 602 ...	62 602 ...	62 602 ...
ISO	KOMET no.	RE mm	EUR Y0	EUR Y0	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
06T102FN	W30 04990.025510	0,2		78,61 **00201**				
06T102TN	W30 04990.0240	0,2	77,47 **60206**					
06T103EL	W30 04120.038425	0,3			24,90 **30200**			
06T103EL	W30 04060.037615	0,3						30,90 **80606**
06T103EL	W30 04060.036110	0,3					27,80 **40606**	
06T103EL	W30 04060.032710	0,3				26,21 **10606**		
090204EL	W30 14120.048425	0,4			28,15 **31800**			
090204EL	W30 14060.047615	0,4						33,65 **80409**
090204EL	W30 14060.046110	0,4					30,90 **40409**	
090204EL	W30 14060.042710	0,4				29,64 **10409**		
090204FN	W30 14990.045510	0,4		87,43 **01401**				
090204TN	W30 14990.0440	0,4	85,96 **60409**					
140304EL	W30 26120.048425	0,4			31,73 **32600**			
140304EL	W30 26060.047615	0,4						37,58 **82600**
140304EL	W30 26060.046110	0,4					34,34 **40414**	
140304EL	W30 26060.042710	0,4				33,36 **12600**		
140304FN	W30 26990.045510	0,4		93,02 **02601**				
140304TN	W30 26990.0440	0,4	93,02 **62600**					
P					●	●	●	
M					●	●	●	
K					●	●	●	●
N				●	○			
S					●	●		
H			●		○		●	
O				●				

→ v_c Page 65

Material group	Guideline recommendation	
	Grade	Chip groove
P	BK60	-14
M	BK2710	-G06
K	BK7615	-G06
N	BK7710	-12
S1.1 – S2.3	BK2710	-G06
S3.1 – S3.3	BK7710	-12
H	CBN40	
O	BK7710	-12

The guideline recommendation shown here is based on experience and serves only to make it easy to find the correct indexable insert for your application.

Additional indexable inserts can be found in our online shop at cuttingtools.ceratizit.com

WOEX / WOGX

Designation	L	S	D1	IC
	mm	mm	mm	mm
WO.X 0302..	3,2	2,30	2,30	5,00
WO.X 0403..	4,1	3,18	2,55	6,35
WO.X 05T3..	5,3	3,80	2,85	8,00
WO.X 06T3..	6,6	3,80	4,05	10,00
WO.X 0804..	7,9	4,80	4,90	12,00
WOEX 1005..	9,9	5,30	4,90	15,00
WOEX 1206..	11,6	6,00	5,95	17,60



WOEX

	-01 BK8425	-01 BK7935	-01 BK7615	-11 BK77
	WOEX	WOEX	WOEX	WOEX
	10 821 ...	10 821 ...	10 821 ...	10 821 ...
ISO	KOMET no.	RE mm	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#	EUR 1A/3#
030204	W29 10010.047935	0,4		15,75 50301		
030204	W29 10110.0477	0,4				15,51 80311
030204	W29 10010.047615	0,4			24,90 05301	
030204	W29 10010.048425	0,4	14,91 30301			
040304	W29 18010.047935	0,4		16,72 50401		
040304	W29 18110.0477	0,4				16,32 80411
040304	W29 18010.047615	0,4			25,01 05401	
040304	W29 18010.048425	0,4	15,84 30401			
05T304	W29 24010.047935	0,4		16,94 50501		
05T304	W29 24110.0477	0,4				16,47 80511
05T304	W29 24010.047615	0,4			26,10 05501	
05T304	W29 24010.048425	0,4	16,28 30501			
06T304	W29 34010.047935	0,4		19,25 50601		
06T304	W29 34110.0477	0,4				18,46 80611
06T304	W29 34010.047615	0,4			28,02 05601	
06T304	W29 34010.048425	0,4	18,19 30601			
080404	W29 42010.047935	0,4		24,26 50801		
080404	W29 42110.0477	0,4				23,65 80811
080404	W29 42010.047615	0,4			34,17 05801	
080404	W29 42010.048425	0,4	22,95 30801			
100504	W29 50010.047935	0,4		33,02 51001		
100504	W29 50110.0477	0,4				32,67 81011
100504	W29 50010.047615	0,4			38,15 06001	
100504	W29 50010.048425	0,4	31,31 31001			
120608	W29 58010.087935	0,8		38,42 53201		
120608	W29 58010.087615	0,8			47,03 08201	
120608	W29 58010.088425	0,8	36,35 31201			
P			●	●		
M			●	●		
K			●	●	●	
N			○	○		
S			●	●		●
H			○			○
O						○

→ v_c Page 65

WOEX / WOGX

	-01 BK6115	-02 BK6440	-15 BK8430	-11 BK7710
	WOEX	WOEX	WOGX	WOEX
	10 821 ...	10 821 ...	10 821 ...	10 821 ...

ISO	KOMET no.	RE mm	EUR 1A/3#		EUR 1A/3#		EUR 1A/3#		EUR 1A/3#	
030204	W29 10150.048430	0,4					27,07	00315		
030204	W29 10110.047710	0,4							16,28	90311
030204	W29 10010.046115	0,4	21,58	40301						
040304	W29 18150.048430	0,4					28,15	00415		
040304	W29 18110.047710	0,4							17,22	90411
040304	W29 18010.046115	0,4	21,75	40401						
05T304	W29 24020.046440	0,4			21,75	25502				
05T304	W29 24110.047710	0,4							17,37	90511
05T304	W29 24150.048430	0,4					28,58	00515		
05T304	W29 24010.046115	0,4	22,17	40501						
06T304	W29 34020.046440	0,4			24,05	25602				
06T304	W29 34110.047710	0,4							19,54	90611
06T304	W29 34150.048430	0,4					32,67	00615		
06T304	W29 34010.046115	0,4	23,23	40601						
080404	W29 42020.046440	0,4			29,95	25802				
080404	W29 42110.047710	0,4							24,90	90811
080404	W29 42150.048430	0,4					37,04	00815		
080404	W29 42010.046115	0,4	28,70	40801						
100504	W29 50020.046440	0,4			33,76	26002				
100504	W29 50110.047710	0,4							34,17	91011
100504	W29 50010.046115	0,4	33,89	41001						
120608	W29 58020.086440	0,8			41,55	21202				
120608	W29 58010.086115	0,8	42,50	41201						

P	●	●	○	
M	●	●	○	
K	●		○	
N				●
S			●	○
H	○		●	○
O				○

→ v_c Page 65

Material group	Guideline recommendation Grade / chip breaker
P	BK8425 / -01
M	BK7935 / -01
K	BK7615 / -01
N	BK7710 / -11
S1.1 – S2.3	BK7935 / -01
S3.1 – S3.3	BK7710 / -11
O	BK7710 / -11

Material group	Maximum feed values						
	WO.X 0302	WO.X 0403	WO.X 05T3	WO.X 06T3	WO.X 0804	WO.X 1005	WO.X 1206
	a_p max.						
P	1,5	2,5	4,5	6,0	7,5	9,0	9,0
M	1,0	1,5	3,5	4,0	6,0	9,0	9,0
K	1,5	3,0	5,0	6,0	7,5	9,0	9,0
N	2,0	3,0	5,0	6,0	7,5	9,0	9,0
S	1,0	1,5	3,5	4,0	6,0	9,0	9,0
O	1,0	1,5	3,5	4,0	7,5	9,0	9.0

The guideline recommendation shown here is based on experience and serves only to make it easy to find the correct indexable insert for your application.

Additional indexable inserts can be found in our online shop at cuttingtools.ceratizit.com

WCMT / WCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
WC.T 0201..	2,71	1,59	2,1	3,97



WCMT



WCGT

WCMT / WCGT

	-SF30	-SF20	-SF16
	CWC06	CWN10	CWP25
			
	F	F	F
	CERMET		
	WCMT	WCGT	WCGT
	70 294 ...	70 295 ...	70 295 ...
ISO / RE mm	EUR X2	EUR X2	EUR X2
020102 / 0,2	15,19 **850**	77,71 **850**	34,66 **500**
020104 / 0,4		77,71 **852**	
P	●	●	●
M	○	●	●
K	●	●	○
N	●	●	●
S		●	
H		●	
O			

→ v_c Page 66

Additional indexable inserts can be found in → **Chapter 9, Indexable insert turning tools**
or in our online shop at cuttingtools.ceratizit.com

CCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CCGT 06..	6,4	2,38	2,8	6,35
CCGT 09..	9,7	3,97	4,4	9,52



CCGT

	-SF20 CWN10	-SF15 CWC06	-SF14 CWC10
			
	F	F	F
		CERMET	CERMET
	CCGT	CCGT	CCGT
	70 296 ...	70 296 ...	70 300 ...

ISO	RE		EUR X2		EUR X2		EUR X2	
	mm							
060202L	0,2		52,42	300	33,66	850	16,89	903
060204L	0,4		52,42	302	33,66	852	16,89	905
09T302L	0,2		56,70	304	36,63	854	21,87	911
09T304L	0,4		56,70	306	36,63	856	21,87	913
P			●		●		●	
M			●		○		●	
K			●		●		●	
N			●		●			
S			●					
H			●					
O								

→ v_c Page 66

Additional indexable inserts can be found in → **Chapter 9, Indexable insert turning tools**
or in our online shop at cuttingtools.ceratizit.com

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values for indexable inserts – MicroKom tools

Index	Indexable inserts for ...																			
	MicroKom													TwinKom						
	62 800 ..., 62 810 ..., 62 815 ..., 62 820 ..., 62 840 ...													62 870 ...						
	K10	BK 2710	BK 60	BK 6110	BK 7615	BK 7710	BK 8425	BK 8430	BK 8440	CBN 40	CTDPU 20	CK 3230	CK 32	BK 6115	BK 6440	BK 7615	BK 77	BK 7710	BK 7935	BK 8425	BK 8430
	v_c (m/min)													v_c (m/min)							
P.1.1		230	270	300			260	200	170			350	350	300	240				250	260	200
P.1.2		230	270	300			260	200	170			350	350	300	240				220	260	200
P.1.3		230	270	300			270	200	170			350	350	270	220				270	270	200
P.1.4		210	250	300			240	180	150			320	320	250	220				240	240	180
P.1.5		210	250	300			230	180	150			320	320	270	220				200	230	180
P.2.1		180	210	270			270	160	140			280	280	270	200				270	270	160
P.2.2		180	210	270			260	160	140			280	280	260	200				260	260	160
P.2.3		180	210	270			180	160	140			280	280	240	200				160	180	160
P.2.4		180	210	270			150	160	140			280	280	190	200				130	150	160
P.3.1		160	190	250			160	140	120			250	250	200	180				140	160	140
P.3.2		160	190	250			130	140	120			250	250	160	160				110	130	140
P.3.3		160	190	250			120	140	120			250	250	140	160				100	120	140
P.4.1		140	160	220			180	120	100			210	210	220	140				160	180	120
P.4.2		140	160	220			130	120	100			210	210	160	140				110	130	120
M.1.1		180	280	220			150	160	140			280	280	220	200				160	150	160
M.2.1		160	250	220			150	140	120			250	250	220	180				160	150	140
M.3.1		120	180	200			130	100	90			180	180	200	160				150	130	100
K.1.1		210	210	290	290		160	180	150					240		290			150	160	180
K.1.2		180	180	290	290		120	160	140					140		290			110	120	160
K.2.1		160	160	270	270		160	140	120					160		270			150	160	140
K.2.2		160	160	250	250		100	140	120					100		250			90	100	140
K.3.1		140	140	220	220		120	120	100					120		220			110	120	120
K.3.2		140	140	220	220		100	120	100					100		220			90	100	120
N.1.1	250					600	400				500							600	400	400	
N.1.2	250					500	400				500							500	400	400	
N.2.1	250					400	250				500							400	250	250	
N.2.2	250					300	250				500							300	250	250	
N.2.3	250					250	230				500							250	230	230	
N.3.1	230					400	200				450							400	200	200	
N.3.2	230					300	220				450							300	220	220	
N.3.3	230					300	330				450							300	330	330	
N.4.1	230					300	200				450							300	200	200	
S.1.1	20	60				60	60	60									50	60	50	60	60
S.1.2	20	50				60	50	50									40	60	40	50	50
S.2.1	20	60				60	60	60									50	60	50	60	60
S.2.2	20	50				60	50	50									40	60	40	50	50
S.2.3	20	30				60	30	30									30	60	30	30	30
S.3.1	60	100				80	100	100									70	80	70	100	100
S.3.2	30	80				80	80	80									60	80	60	80	80
S.3.3	30	50				80	50	50									40	80	40	50	50
H.1.1				100		80	100	100	90	160				100			40	80		100	100
H.1.2				80		40	80	80	70	185				80			30	40		80	80
H.1.3				50		40	50	50	40	215				50			20	40		50	50
H.1.4						40				240								40			
H.2.1				100		80	100	100	90					100			40	80		100	100
H.3.1				80		80	80	80	70					80			30	80		80	80
O.1.1	100					100					500						100	100			
O.1.2	100					100					500						100	100			
O.2.1											500										
O.2.2	100					100					300						100	100			
O.3.1	100					100					300						100	100			

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The stated values are possible cutting data which have to be increased or reduced according to the application conditions! The specified values represent guideline cutting data that can be adjusted by approx. **± 20 %** according to the usage conditions. It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

5

Cutting data standard values for indexable inserts – SpinTools tools

Index	Indexable inserts for ...									Boring steel	Inserts Cutting insert
	62 295 ...					62 303 ..., 62 304 ..., 62 305 ..., 62 308 ..., 62 326 ..., 62 332 ..., 62 333 ..., 62 363 ..., 62 372 ..., 62 373 ...				62 346 ...	62 383 ..., 62 384 ...
	CTCP125 (HCX1125)	CTCP115 (HCX1115)	CTCP135 (HCR1135)	CTC2135 (CWN2135)	H10T (CWK15)	CWN10	CWP25	CWC06	CWC10	HM uncoated	Solid carbide TiN
	v_c (m/min)					v_c (m/min)				v_c (m/min)	v_c (m/min)
P.1.1	295	370	210	360		185	185	250	175	175	190
P.1.2	250	315	175	360		185	185	250	140	175	200
P.1.3	210	270	145	360		185	185	250	140	175	170
P.1.4	200	250	135	375		185	185	250	140	175	170
P.1.5	180	230	120	375		185	185	250	140	175	160
P.2.1	260	325	180	385		185	185	250	140	175	180
P.2.2	195	250	130	385		185	185	250	175	175	150
P.2.3	180	230	120	385		185	185	250	140	175	160
P.2.4	130	170	85	385		185	185	250	140	175	160
P.3.1	170	200	150	310		185	185	250	175	175	120
P.3.2	105	140	95	310		135	135	165	140	65	100
P.3.3	40	85	35	310		135	135	165	140	65	100
P.4.1	170	200	155	320		125	125	120	120	100	80
P.4.2	135	170	125	320		125	125	120	120	100	80
M.1.1			155	300		120	120	120	120	100	80
M.2.1			95	310		100	100	100	110	70	80
M.3.1			135	325		120	120	120	120	100	80
K.1.1	170	255			140	160	160	160	225	135	200
K.1.2	160	235			115	160	160	160	225	135	150
K.2.1	180	270			150	160	160	160	125	135	120
K.2.2	160	205			110	140	140	140	125	115	110
K.3.1	200	250			170	140	140	140	125	115	180
K.3.2	160	210			140	140	140	140	125	115	150
N.1.1					1400	400	400	400		250	300
N.1.2					1100	400	400	400		250	240
N.2.1					950	400	400	400		250	240
N.2.2					950	400	400	400		250	240
N.2.3					500	400	400	400		250	240
N.3.1					425	400	400	400		250	290
N.3.2					400	400	400	400		250	290
N.3.3					275	400	400	400		250	290
N.4.1					225						220
S.1.1				30		55					60
S.1.2				25		55					40
S.2.1				15		55					30
S.2.2				10		55					30
S.2.3				10		55					30
S.3.1				105		55					30
S.3.2				25		55					25
S.3.3						55					25
H.1.1						125					110
H.1.2						100					80
H.1.3						80					70
H.1.4											
H.2.1						170					70
H.3.1						125					70
O.1.1					130						240
O.1.2											240
O.2.1					105						180
O.2.2											180
O.3.1											180

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The stated values are possible cutting data which have to be increased or reduced according to the application conditions! The specified values represent guideline cutting data that can be adjusted by approx. **± 20 %** according to the usage conditions. It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

Cutting data standard values for precision adjustment heads – MicroKom

Index	62 820 …, 62 840 …, 62 800 … BluFlex 2, hi.flex Fine machining with depth of cut a_p = 0.1 – 0.2 mm				62 800 06089 hi.flex micro Fine machining with depth of cut a_p = 0.1 – 0.2 mm			● 1st choice ○ suitable		
	Ø 0,5 – 5,6	Ø 5,6 – 8	Ø 8 – 12	Ø 12 – 365	Ø 0,5 – 8	Ø 8 – 12	Ø 12 – 60	Emulsion	Compressed air	MMS
	f (mm/rev)				f (mm/rev)					
P.1.1	0,02–0,05	0,03–0,04	0,05–0,07	0,07–0,10	0,02–0,05	0,05–0,07	0,07–0,10	●	○	
P.1.2	0,02–0,05	0,03–0,04	0,05–0,07	0,08–0,12	0,02–0,05	0,05–0,07	0,08–0,12	●	○	
P.1.3	0,02–0,05	0,03–0,04	0,04–0,06	0,08–0,12	0,02–0,05	0,04–0,06	0,08–0,12	●	○	
P.1.4	0,02–0,05	0,03–0,04	0,04–0,06	0,07–0,10	0,02–0,05	0,04–0,06	0,07–0,10	●	○	
P.1.5	0,02–0,05	0,03–0,04	0,05–0,07	0,08–0,12	0,02–0,05	0,05–0,07	0,08–0,12	●	○	
P.2.1	0,02–0,05	0,03–0,04	0,04–0,06	0,08–0,12	0,02–0,05	0,04–0,06	0,08–0,12	●	○	
P.2.2	0,02–0,05	0,03–0,04	0,04–0,06	0,07–0,10	0,02–0,05	0,04–0,06	0,07–0,10	●	○	
P.2.3	0,02–0,05	0,02–0,03	0,04–0,06	0,07–0,10	0,02–0,05	0,04–0,06	0,07–0,10	●	○	
P.2.4	0,02–0,05	0,02–0,03	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
P.3.1	0,02–0,05	0,02–0,03	0,04–0,06	0,06–0,08	0,02–0,05	0,04–0,06	0,06–0,08	●	○	
P.3.2	0,02–0,05	0,02–0,03	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
P.3.3	0,02–0,05	0,02–0,03	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
P.4.1	0,02–0,05	0,02–0,03	0,04–0,05	0,07–0,10	0,02–0,05	0,04–0,05	0,07–0,10	●	○	
P.4.2	0,02–0,05	0,02–0,03	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
M.1.1	0,02–0,05	0,01–0,015	0,04–0,05	0,07–0,10	0,02–0,05	0,04–0,05	0,07–0,10	●	○	
M.2.1	0,02–0,05	0,01–0,015	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
M.3.1	0,02–0,05	0,01–0,015	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
K.1.1	0,02–0,05	0,04–0,05	0,06–0,08	0,11–0,15	0,02–0,05	0,06–0,08	0,11–0,15	○	●	
K.1.2	0,02–0,05	0,04–0,05	0,06–0,08	0,11–0,15	0,02–0,05	0,06–0,08	0,11–0,15	○	●	
K.2.1	0,02–0,05	0,03–0,04	0,06–0,08	0,11–0,15	0,02–0,05	0,06–0,08	0,11–0,15	○	●	
K.2.2	0,02–0,05	0,02–0,03	0,05–0,07	0,08–0,12	0,02–0,05	0,05–0,07	0,08–0,12	○	●	
K.3.1	0,02–0,05	0,03–0,04	0,06–0,08	0,11–0,15	0,02–0,05	0,06–0,08	0,11–0,15	○	●	
K.3.2	0,02–0,05	0,02–0,03	0,05–0,07	0,08–0,12	0,02–0,05	0,05–0,07	0,08–0,12	○	●	
N.1.1	0,02–0,05	0,01–0,02	0,04–0,06	0,07–0,10	0,02–0,05	0,04–0,06	0,07–0,10	●	○	
N.1.2	0,02–0,05	0,01–0,02	0,04–0,06	0,07–0,10	0,02–0,05	0,04–0,06	0,07–0,10	●	○	
N.2.1	0,02–0,05	0,04–0,05	0,06–0,08	0,08–0,12	0,02–0,05	0,06–0,08	0,08–0,12	●	○	
N.2.2	0,02–0,05	0,04–0,05	0,06–0,08	0,08–0,12	0,02–0,05	0,06–0,08	0,08–0,12	●	○	
N.2.3	0,02–0,05	0,04–0,05	0,06–0,08	0,08–0,12	0,02–0,05	0,06–0,08	0,08–0,12	●	○	
N.3.1	0,02–0,05	0,01–0,02	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
N.3.2	0,02–0,05	0,01–0,02	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
N.3.3	0,02–0,05	0,04–0,05	0,06–0,08	0,11–0,15	0,02–0,05	0,06–0,08	0,11–0,15	●	○	
N.4.1	0,02–0,05	0,01–0,02	0,03–0,04	0,06–0,08	0,02–0,05	0,03–0,04	0,06–0,08	●	○	
S.1.1	0,02–0,08	0,01–0,015	0,03–0,04	0,06–0,08	0,02–0,08	0,03–0,04	0,06–0,08	●	○	
S.1.2	0,02–0,08	0,01–0,015	0,02–0,03	0,04–0,06	0,02–0,08	0,02–0,03	0,04–0,06	●	○	
S.2.1	0,02–0,08	0,01–0,015	0,03–0,04	0,06–0,08	0,02–0,08	0,03–0,04	0,06–0,08	●	○	
S.2.2	0,02–0,08	0,01–0,015	0,02–0,03	0,04–0,06	0,02–0,08	0,02–0,03	0,04–0,06	●	○	
S.2.3	0,02–0,08	0,01–0,015	0,06–0,08	0,04–0,06	0,02–0,08	0,06–0,08	0,04–0,06	●	○	
S.3.1	0,02–0,08	0,01–0,015	0,03–0,04	0,06–0,08	0,02–0,08	0,03–0,04	0,06–0,08	●	○	
S.3.2	0,02–0,08	0,01–0,015	0,03–0,04	0,06–0,08	0,02–0,08	0,03–0,04	0,06–0,08	●	○	
S.3.3	0,02–0,08	0,01–0,015	0,01–0,02	0,03–0,04	0,02–0,08	0,01–0,02	0,03–0,04	●	○	
H.1.1	0,02–0,05		0,04–0,05	0,06–0,08	0,02–0,05	0,04–0,05	0,06–0,08		●	
H.1.2	0,02–0,05		0,04–0,05	0,06–0,08	0,02–0,05	0,04–0,05	0,06–0,08		●	
H.1.3	0,02–0,05		0,02–0,03	0,03–0,04	0,02–0,05	0,02–0,03	0,03–0,04		●	
H.1.4										
H.2.1	0,02–0,05		0,04–0,05	0,06–0,08	0,02–0,05	0,04–0,05	0,06–0,08		●	
H.3.1	0,02–0,05		0,04–0,05	0,06–0,08	0,02–0,05	0,04–0,05	0,06–0,08		●	
O.1.1	0,02–0,05		0,06–0,08	0,06–0,08	0,02–0,05	0,06–0,08	0,06–0,08	○	●	
O.1.2	0,02–0,05		0,06–0,08	0,06–0,08	0,02–0,05	0,06–0,08	0,06–0,08	○	●	
O.2.1										
O.2.2	0,02–0,05		0,06–0,08	0,07–0,10	0,02–0,05	0,06–0,08	0,07–0,10		●	
O.3.1	0,02–0,05		0,06–0,08	0,07–0,10	0,02–0,05	0,06–0,08	0,07–0,10		●	

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The specified values represent guideline cutting data that can be adjusted within the range according to the usage conditions! It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

5

Cutting data standard values for precision adjustment heads – MicroKom

Index	62 815 … M03 Speed, Fine machining with depth of cut a_p = 0.1 – 0.2 mm		62 810 … FF precision adjustment head, Fine machining with depth of cut a_p = 0.1 – 0.2 mm			● 1st choice ○ suitable		
	Ø 24,8 – 63	Ø 63 – 206	Ø 29,5 – 50	Ø 47 – 83	Ø 79 – 199	Emulsion	Compressed air	MMS
	f (mm/rev)		f (mm/rev)					
P.1.1	0,06–0,08	0,07–0,10	0,06–0,08	0,07–0,10	0,11–0,15	●	○	○
P.1.2	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,14–0,20	●	○	○
P.1.3	0,06–0,08	0,08–0,12	0,06–0,08	0,08–0,12	0,14–0,20	●	○	○
P.1.4	0,05–0,07	0,07–0,10	0,05–0,07	0,07–0,10	0,13–0,18	●	○	○
P.1.5	0,06–0,09	0,09–0,13	0,06–0,09	0,09–0,13	0,13–0,18	●	○	○
P.2.1	0,06–0,08	0,08–0,12	0,06–0,08	0,08–0,12	0,14–0,20	●	○	○
P.2.2	0,05–0,07	0,07–0,10	0,05–0,07	0,07–0,10	0,13–0,18	●	○	○
P.2.3	0,06–0,08	0,07–0,10	0,06–0,08	0,07–0,10	0,14–0,20	●	○	○
P.2.4	0,04–0,06	0,06–0,08	0,04–0,06	0,06–0,08	0,07–0,10	●	○	○
P.3.1	0,04–0,06	0,07–0,10	0,04–0,06	0,07–0,10	0,11–0,15	●	○	○
P.3.2	0,03–0,04	0,06–0,08	0,03–0,04	0,06–0,08	0,08–0,12	●	○	○
P.3.3	0,03–0,04	0,05–0,07	0,03–0,04	0,05–0,07	0,07–0,10	●	○	○
P.4.1	0,04–0,06	0,07–0,10	0,04–0,06	0,07–0,10	0,11–0,15	●	○	○
P.4.2	0,03–0,04	0,06–0,08	0,03–0,04	0,06–0,08	0,08–0,12	●	○	○
M.1.1	0,04–0,06	0,07–0,10	0,04–0,06	0,07–0,10	0,11–0,15	●	○	○
M.2.1	0,04–0,06	0,07–0,10	0,04–0,06	0,07–0,10	0,11–0,15	●	○	○
M.3.1	0,04–0,05	0,06–0,09	0,04–0,05	0,06–0,09	0,08–0,12	●	○	○
K.1.1	0,11–0,15	0,14–0,20	0,11–0,15	0,14–0,20	0,21–0,30	○	●	○
K.1.2	0,11–0,15	0,14–0,20	0,11–0,15	0,14–0,20	0,21–0,30	○	●	○
K.2.1	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,18–0,25	○	●	○
K.2.2	0,06–0,08	0,08–0,12	0,06–0,08	0,08–0,12	0,14–0,20	○	●	○
K.3.1	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,18–0,25	○	●	○
K.3.2	0,06–0,08	0,08–0,12	0,06–0,08	0,08–0,12	0,14–0,20	○	●	○
N.1.1	0,06–0,08	0,08–0,12	0,06–0,08	0,08–0,12	0,11–0,15	●	○	○
N.1.2	0,06–0,08	0,08–0,12	0,06–0,08	0,08–0,12	0,11–0,15	●	○	○
N.2.1	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,14–0,20	●	○	○
N.2.2	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,14–0,20	●	○	○
N.2.3	0,06–0,09	0,08–0,12	0,06–0,09	0,08–0,12	0,13–0,18	●	○	○
N.3.1	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,14–0,20	●	○	○
N.3.2	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,15–0,22	●	○	○
N.3.3	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,14–0,20	●	○	○
N.4.1	0,07–0,10	0,11–0,15	0,07–0,10	0,11–0,15	0,14–0,20	●	○	○
S.1.1	0,04–0,06	0,06–0,08	0,04–0,06	0,06–0,08	0,07–0,10	●	○	○
S.1.2	0,03–0,04	0,04–0,06	0,03–0,04	0,04–0,06	0,06–0,08	●	○	○
S.2.1	0,04–0,06	0,06–0,08	0,04–0,06	0,06–0,08	0,07–0,10	●	○	○
S.2.2	0,03–0,04	0,04–0,06	0,03–0,04	0,04–0,06	0,06–0,08	●	○	○
S.2.3	0,03–0,04	0,04–0,06	0,03–0,04	0,04–0,06	0,04–0,06	●	○	○
S.3.1	0,04–0,06	0,06–0,08	0,04–0,06	0,06–0,08	0,08–0,11	●	○	○
S.3.2	0,04–0,06	0,06–0,08	0,04–0,06	0,06–0,08	0,07–0,10	●	○	○
S.3.3	0,03–0,04	0,04–0,06	0,03–0,04	0,04–0,06	0,07–0,10	●	○	○
H.1.1	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	0,07–0,10		●	○
H.1.2	0,04–0,06	0,04–0,06	0,04–0,06	0,04–0,06	0,06–0,08		●	○
H.1.3	0,03–0,04	0,03–0,04	0,03–0,04	0,03–0,04	0,03–0,04		●	○
H.1.4								
H.2.1	0,04–0,05	0,04–0,06	0,04–0,05	0,04–0,06	0,07–0,10		●	○
H.3.1	0,04–0,05	0,04–0,06	0,04–0,05	0,04–0,06	0,06–0,08		●	○
O.1.1	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	○	●	○
O.1.2	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	○	●	○
O.2.1								
O.2.2	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08		●	
O.3.1	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08	0,06–0,08		●	

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The specified values represent guideline cutting data that can be adjusted within the range according to the usage conditions! It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

Cutting data standard values for finish boring heads – SpinTools

Index	62 303 ..., 62 308 ...	62 305 ...	● 1st choice ○ suitable			62 382 ..., 62 386 ...	62 372 ..., 62 373 ...	62 326 ..., 62 332 ..., 62 333 ..., 62 363 ...	62 304 ...	● 1st choice ○ suitable		
	Single point finish boring head		Emulsion	Compressed air	MMS	Micro Boring Head	Multi-Head boring and fine boring head	Single point boring head	Fine boring head	Emulsion	Compressed air	MMS
	a_p = 0,1 – 0,4					a_p = 0,1 – 0,2	a_p = 0,1 – 0,4	a_p = 0,1 – 0,4	a_p = 0,1 – 0,4			
	Ø 23,9–116,1	Ø 86–402				Ø 0,3–19,1	Ø 2–320	Ø 3–88	Ø 14,7–24,1			
	f (mm/rev)					f (mm/rev)						
P.1.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.1.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.1.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.1.4	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.1.5	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.2.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.2.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.2.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.2.4	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.3.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.3.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.3.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.4.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
P.4.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
M.1.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
M.2.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
M.3.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
K.1.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
K.1.2	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
K.2.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
K.2.2	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
K.3.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
K.3.2	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
N.1.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.1.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.2.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.2.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.2.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.3.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.3.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.3.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
N.4.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.1.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.1.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.2.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.2.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.2.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.3.1	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.3.2	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
S.3.3	0,03–0,12	0,03–0,12	●	○		0,02	0,03–0,12	0,03–0,12	0,03–0,10	●	○	○
H.1.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
H.1.2	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
H.1.3	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
H.1.4												
H.2.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
H.3.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
O.1.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
O.1.2	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	○
O.2.1	0,03–0,12	0,03–0,12	○	●		0,02	0,03–0,12	0,03–0,12	0,03–0,10	○	●	
O.2.2	0,03–0,12	0,03–0,12		●		0,02	0,03–0,12	0,03–0,12	0,03–0,10		●	
O.3.1	0,03–0,12	0,03–0,12		●		0,02	0,03–0,12	0,03–0,12	0,03–0,10		●	

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The specified values represent guideline cutting data that can be adjusted within the range (i.e. by ± 20%) according to the usage conditions! It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

5

Cutting data standard values for boring heads for roughing – TwinKom

Index	62 870 … Twin cutters, Cutting depth a_p = 1 – 9 mm							● 1st choice ○ suitable		
	Ø 24–32	Ø 30– 41	Ø 39– 53	Ø 51–71	Ø 64–91	Ø 83–124	Ø 109–215	Emulsion	Compressed air	MMS
	f (mm/rev)									
P.1.1	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.1.2	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.1.3	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.1.4	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.1.5	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.2.1	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.2.2	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.2.3	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.2.4	0,14–0,20	0,17–0,24	0,22–0,30	0,28–0,40	0,32–0,45	0,35–0,50	0,35–0,50	●	○	○
P.3.1	0,11–0,15	0,14–0,20	0,18–0,25	0,22–0,32	0,27–0,38	0,29–0,42	0,29–0,42	●	○	○
P.3.2	0,11–0,15	0,14–0,20	0,18–0,25	0,22–0,32	0,27–0,38	0,29–0,42	0,29–0,42	●	○	○
P.3.3	0,11–0,15	0,14–0,20	0,18–0,25	0,22–0,32	0,27–0,38	0,29–0,42	0,29–0,42	●	○	○
P.4.1	0,08–0,12	0,11–0,15	0,14–0,20	0,18–0,25	0,20–0,28	0,25–0,35	0,25–0,35	●	○	○
P.4.2	0,08–0,12	0,11–0,15	0,14–0,20	0,18–0,25	0,20–0,28	0,25–0,35	0,25–0,35	●	○	○
M.1.1	0,10–0,14	0,13–0,18	0,17–0,24	0,17–0,24	0,21–0,30	0,28–0,40	0,32–0,45	●	○	○
M.2.1	0,10–0,14	0,13–0,18	0,17–0,24	0,28–0,40	0,21–0,30	0,28–0,40	0,32–0,45	●	○	○
M.3.1	0,08–0,12	0,10–0,14	0,14–0,20	0,14–0,20	0,18–0,25	0,21–0,30	0,25–0,35	●	○	○
K.1.1	0,18–0,25	0,21–0,30	0,28–0,40	0,35–0,50	0,39–0,55	0,42–0,60	0,42–0,60	○	●	○
K.1.2	0,18–0,25	0,21–0,30	0,28–0,40	0,35–0,50	0,39–0,55	0,42–0,60	0,42–0,60	○	●	○
K.2.1	0,18–0,25	0,21–0,30	0,28–0,40	0,35–0,50	0,39–0,55	0,42–0,60	0,42–0,60	○	●	○
K.2.2	0,15–0,22	0,20–0,28	0,21–0,30	0,32–0,45	0,32–0,45	0,35–0,50	0,35–0,50	○	●	○
K.3.1	0,14–0,20	0,17–0,24	0,20–0,28	0,25–0,35	0,28–0,40	0,32–0,45	0,32–0,45	○	●	○
K.3.2	0,14–0,20	0,17–0,24	0,20–0,28	0,25–0,35	0,28–0,40	0,32–0,45	0,32–0,45	○	●	○
N.1.1	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.1.2	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.2.1	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.2.2	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.2.3	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.3.1	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.3.2	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.3.3	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
N.4.1	0,18–0,25	0,21–0,30	0,35–0,50	0,35–0,50	0,42–0,60	0,49–0,70	0,49–0,70	●	○	○
S.1.1	0,08–0,12	0,08–0,12	0,08–0,12	0,10–0,14	0,13–0,18	0,14–0,20	0,14–0,20	●	○	○
S.1.2	0,07–0,10	0,07–0,10	0,07–0,10	0,08–0,11	0,10–0,14	0,11–0,16	0,11–0,16	●	○	○
S.2.1	0,08–0,12	0,08–0,12	0,08–0,12	0,10–0,14	0,13–0,18	0,14–0,20	0,14–0,20	●	○	○
S.2.2	0,07–0,10	0,07–0,10	0,07–0,10	0,08–0,11	0,13–0,18	0,11–0,16	0,11–0,16	●	○	○
S.2.3	0,07–0,10	0,07–0,10	0,07–0,10	0,08–0,11	0,10–0,14	0,11–0,16	0,11–0,16	●	○	○
S.3.1	0,08–0,12	0,08–0,12	0,08–0,12	0,10–0,14	0,13–0,18	0,14–0,20	0,14–0,20	●	○	○
S.3.2	0,08–0,12	0,08–0,12	0,08–0,12	0,10–0,14	0,13–0,18	0,14–0,20	0,14–0,20	●	○	○
S.3.3	0,07–0,10	0,07–0,10	0,07–0,10	0,08–0,11	0,13–0,18	0,11–0,16	0,11–0,16	●	○	○
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1	0,11–0,16	0,11–0,16	0,11–0,16	0,14–0,20	0,14–0,20	0,14–0,20	0,14–0,20	○	●	○
O.1.2	0,11–0,16	0,11–0,16	0,11–0,16	0,14–0,20	0,14–0,20	0,14–0,20	0,14–0,20	○	●	○
O.2.1										
O.2.2	0,06–0,08	0,06–0,08	0,07–0,10	0,07–0,10	0,08–0,12	0,08–0,12	0,10–0,14		●	
O.3.1	0,06–0,08	0,06–0,08	0,07–0,10	0,07–0,10	0,09–0,12	0,08–0,12	0,10–0,14		●	

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The specified values represent guideline cutting data that can be adjusted within the range according to the usage conditions! It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

Cutting data standard values for boring heads for roughing – SpinTools

Index	62 295 … Twin rough boring head, Cutting depth a_p = 2.5 – 7 mm			● 1st choice ○ suitable		
	Ø 23,5–40,5	Ø 40,5–66,5	Ø 66,5–87,5	Emulsion	Compressed air	MMS
	f (mm/rev)					
P.1.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.1.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.1.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.1.4	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.1.5	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.2.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.2.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.2.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.2.4	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.3.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.3.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.3.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.4.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
P.4.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
M.1.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
M.2.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
M.3.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
K.1.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
K.1.2	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
K.2.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
K.2.2	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
K.3.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
K.3.2	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
N.1.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.1.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.2.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.2.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.2.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.3.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.3.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.3.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
N.4.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.1.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.1.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.2.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.2.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.2.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.3.1	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.3.2	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
S.3.3	0,3–0,4	0,4–0,5	0,5–0,7	●	○	
H.1.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
H.1.2	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
H.1.3	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
H.1.4						
H.2.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
H.3.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
O.1.1	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
O.1.2	0,3–0,4	0,4–0,5	0,5–0,7	○	●	
O.2.1	0,3–0,4	0,4–0,5	0,5–0,7	○		
O.2.2	0,3–0,4	0,4–0,5	0,5–0,7		●	
O.3.1	0,3–0,4	0,4–0,5	0,5–0,7		●	

→ v_c Page 65+66 → $n_{max.}$ Page 72+74 → LTA Page 72+74

The cutting data is significantly dependent on the external conditions, e.g. stability of the tool and workpiece clamping, material and machine type! The specified values represent guideline cutting data that can be adjusted within the range according to the usage conditions! It is essential to observe the v_c values of the type used, the maximum speeds of the system and the reduction of these maximum speeds depending on the type used overhang length (LTA).

5

Fine boring tools

Maximum speed

System / tool		Boring range Ø (mm)	Maximum speed in slide centre position n_{max} in $1/_{min}$
	62 820 ..., 62 840 ... BluFlex 2	0,5–365	20.000
	**62 800 ...** hi.flex	0,5–365	17.500
	62 800 06089 hi.flex micro	0,5–60	30.000
	**62 386 ..., 62 382 ...** Micro Boring Head	0,3–19,1	30.000
	62 815 ... M03 Speed	24–39	40.000
		38–50	31.000
		49–63	24.000
		62–80	18.500
		79– 103	15.000
		100– 130	11.500
		128–168	10.000
		166–206	8.000
	**62 810 ...** FF precision adjustment head	29,5–42	25.000
		39–50	18.000
		47–66	12.000
		58–83	9.000
		79– 108	6.000
		100–141	4.000
		138–179	3.500
		178–199	3.000
	62 372 ..., 62 373 ... Multi-Head boring and fine boring head with bridge	88–164	900
		164–320	250
	62 305 ... Single point finish boring head with insert holder	86–138	1.150
		136–220	720
		188–302	520
		242–402	400

System / tool		Offset	
	Boring range Ø (mm)	X ≤ 0,5 mm	X > 0,5 mm
		Maximum speed n_{max} in $1/_{min}$	
62 372 ..., 62 373 ... Multi-Head boring and fine boring head with boring bar	3–20	16.000	6.000
62 326 ..., 62 332 ..., 62 333 ..., 62 363 ... Single point boring head with boring bar	20–48	12.000	4.000
	48–88	8.000	2.000

System / tool			
	Boring range Ø (mm)	Unbalanced	Balanced
		Maximum speed n_{max} in $1/_{min}$	
62 308 ..., 62 303 ... Single point finish boring head with insert holder	24–31	9.000	12.000
	31–40	7.500	10.000
	40–51	5.250	8.000
	51–67	4.000	6.500
	67– 87	3.000	5.000
	87–116	2.500	4.000
	116–153	1.750	3.000

Selection of the maximum speed

depending on the overhang length (LTA)

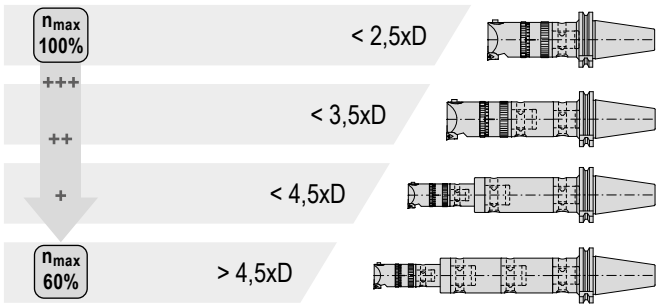

Scale accuracy

Large scale with 0.002 mm adjustment

How it works:

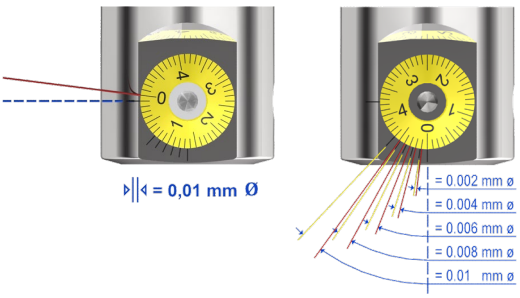

Fine boring tools

Maximum overhang length LTA at 35 mm shank clamping depth



LTA (mm)	High-speed boring head 62 361 ...																Fine boring head 62 304 ...			Boring bar 62 353 ...
	014	015	016	017	018	019	020	021	022	023	025	027	030	033	037	040	017	020	024	
	56																			008
		63																		009
			70																	010
				77																011
					84															012
						91														013
							98	98									115			014
									112	112	112	112	112	112	112	112		125		016
																			105	018
																			145	118
																			185	218

Selection of the cutting radius

depending on the overhang length (LTA)

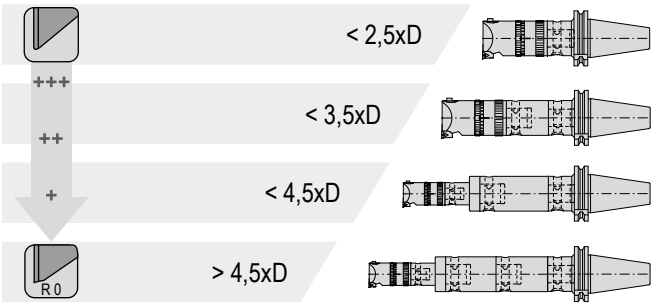

Selection of the cutting radius

depending on the cutting depth a_p

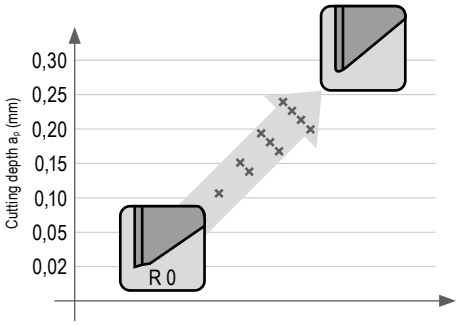

Influence of the cutting forces of the cutting edge radius on internal machining

Resulting force

$$F_{res} = \sqrt{F_a^2 + F_p^2} = \sqrt{F_c^2 + F_f^2 + F_p^2}$$

Tangential cutting force (Fc)
- ▲ pushes the tool down from the vertical central axis
- ▲ is influenced by the cutting depth and the chip thickness
- ▲ reduces the clearance angle

Passive cutting force (Fp)
- ▲ pushes the tool away from the horizontal central axis
- ▲ increases the risk of vibrations and causes dimensional inaccuracies

Feed force (Ff)
- ▲ acts in the machining direction of the tool

Active cutting force (Fa)
- ▲ determined by F_c and F_f

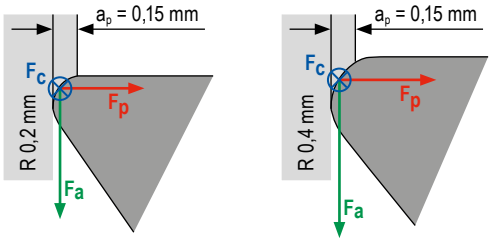

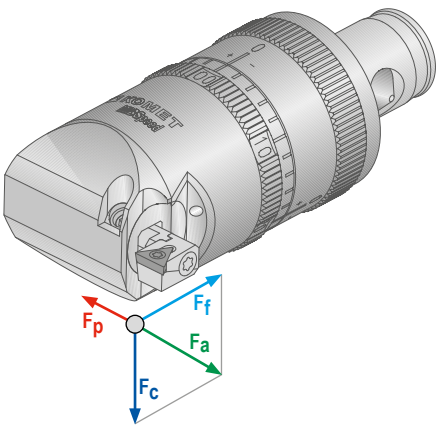

5

Counterboring tools

Maximum speed

System / tool	Boring range Ø (mm)	Maximum speed n_{max} in $1/_{min}$
 **62 870 ...** TwinKom	24–31	12.000
	31–40	10.000
	40–51	8.000
	51–68	6.500
62 295 ... Twin rough boring head	67–87	5.000
	87–116	4.000
	116–153	3.000
	153–215	2.200

Selection of the maximum speed

depending on the overhang length (LTA)

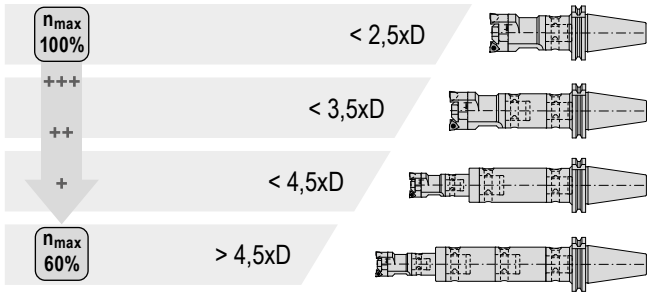

TwinKom applications

in pre-cast / premachined holes

Roughing as a "true" two-edged cutter



Axial adjustment required

Roughing with large allowance

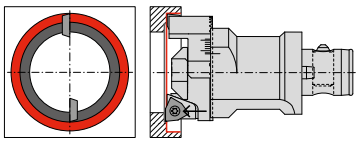

Roughing with large offset

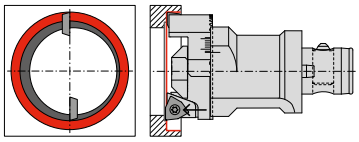

Roughing / Semi-Finishing

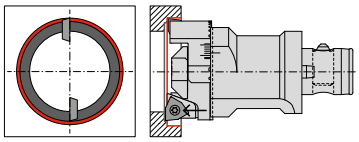

Cut distribution calculation

Example:
D2 (finished Ø) = 100 mm,
D1 (raw Ø) = 80 mm,
S (offset) = 3 mm

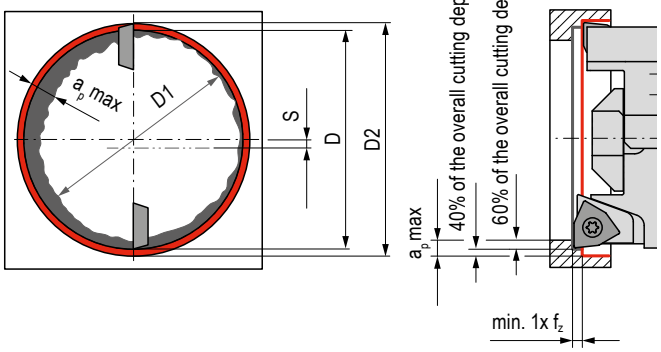

Calculation formula

$$D = D2 - [(\frac{D2 - D1}{2}) + S] \times 0{,}8$$

$$D = 100 - [(\frac{100 - 80}{2}) + 3] \times 0{,}8 = 89{,}6 \text{ mm}$$

Feed rate guide values for surface finish quality

Roughness range R_Z in µm	R_{th}	Corresponds to R_a	Roughness index	ISO 1302	Corner radius RE in mm and feed f in mm/rev						
					RE = 0,1	RE = 0,2	RE = 0,4	RE = 0,8	RE = 1,2	RE = 1,6	RE = 2,4
63–100	$R_{th}63$	12,5–25	N11	25	0,22*	0,32*	0,45*	0,63	0,78	0,9	1,1
40–63	$R_{th}40$	6,3–12,5	N10	12,5	0,18*	0,25*	0,36	0,51	0,62	0,72	0,88
31,5–40	$R_{th}31{,}5$	4,9–6,3	N9	6,3	0,16*	0,22*	0,32	0,45	0,55	0,63	0,78
25–31,5	$R_{th}25$	4,0–4,9			0,14*	0,2*	0,28	0,4	0,49	0,57	0,69
16–25	$R_{th}16$	2,5–4,0	N8	3,2	0,11*	0,16	0,23	0,32	0,39	0,45	0,55
10–16	$R_{th}10$	1,6–2,5			0,09	0,13	0,18	0,25	0,31	0,36	0,44
6,3–10	$R_{th}6{,}3$	1,0–1,6	N7	1,6	0,07	0,1	0,14	0,2	0,25	0,28	0,35
4–6,3	$R_{th}4$	0,8–1,0	N6	0,8	0,06	0,08	0,11	0,16	0,2	0,23	0,28
2,5–4	$R_{th}2{,}5$	0,4–0,8	N5	0,4	0,04	0,06	0,09	0,13	0,15	0,18	0,22
1,6–2,5	$R_{th}1{,}6$	0,2–0,4	N4	0,2	0,04	0,05	0,07	0,1	0,12	0,14	0,18
1–1,6	$R_{th}1$	0,1–0,2	N3	0,1	0,03	0,04	0,06	0,08	0,1	0,11	0,14

*Please ensure that the feed rate values used do not exceed the corner radius (RE).

The feed rate values shown are recommended values and are based on purely theoretical calculations using the above-mentioned formula. These may however deviate in practice.

Insert

Selection of the rake angle

Recommendations for the usage of indexable inserts with ground chip breakers

	rounded E	Sharp F	chamfered T
0°	P	P	P
	M	M	M
	K	K	**K**
	N	**N**	N
	S	S	S
	H	H	**H**
≤ 6°	**P**	P	P
	M	M	M
	K	K	K
	N	N	N
	S	S	S
	H	H	H
≤ 12°	**P**	P	P
	M	M	M
	K	K	K
	N	**N**	N
	S	**S**	S
	H	H	H
≤ 20°	P	P	P
	M	M	M
	K	K	K
	N	**N**	N
	S	**S**	S
	H	H	H

→ **Page 79**
Here you will find a detailed chip groove description.

Number key

for MicroKom indexable inserts

W	2	9	2	4	0	1	0	.	0	4	8	4	2	5
	2	*3*	*4*	*5*	*6*	*7*	*8*		*9*	*10*	*11*	*12*	*13*	*14*

2 – 3 Type / shape

00	W...	84°	Regular version, periphery ground
29	W...	84°	Reinforced version
30	T...	60°	Periphery ground, clearance angle 8°
57	T...	60°	Periphery ground, clearance angle 11°
80	S...	90°	Periphery sintered

4 – 5 Size / IC

04	4,0 mm	**18**	6,2 mm 6,35 mm	**28**	8,9 mm	**42**	12,0 mm
10	4,8 mm 5,0 mm	**20**	7,0 mm 7,1 mm	**32**	9,52 mm 9,8 mm	**46**	13,2 mm
12	5,5 mm	**24**	8,0 mm	**34**	10,0 mm	**50**	15,0 mm
14	5,6 mm	**26**	8,2 mm	**38**	10,9 mm 11,1 mm	**58**	17,6 mm

6 – 7 Topography

Ground code

06	Left-hand cutting, 6°
12	Left-hand cutting, 12°
34	High-feed geometry, chamfered and rounded

Sintered code

01	Double grooves, cutting edge chamfered and rounded
02	Stepped geometry, cutting edge chamfered and rounded
03	Calotte geometry, cutting edge rounded
11	20° chip former, cutting edge rounded
12	Alu / finishing geometry
13	Shaft geometry, cutting edge rounded
14	Finishing topography
15	Semi-finishing topography
18	Finishing topography with wiper corner
32	Burr-minimised, periphery ground
33	Burr-minimised, periphery sintered

9 – 10 Corner radius

01	R 0,1	**04**	R 0,4
02	R 0,2	**06**	R 0,6
03	R 0,3	**08**	R 0,8

11 – 14 Grade

→ **Page 80+81**
Here you will find the detailed grade description.

Notes on drilling technology – TwinKom

1. 

Counterboring a through hole

▲ Possible without any problems

2. 

Counterboring a blind hole

▲ Possible without any problems

3. 

Drilling through a transverse hole

▲ Reduce feed by up to 50%, if necessary
▲ Check for chip jamming on the periphery of the tool
▲ Use tough indexable inserts
▲ Use stable corner radius

4. 

Spot drilling uneven surfaces (casting surfaces)

▲ Feed must reduce by up to 40% when spot drilling
▲ Use tough indexable inserts
▲ Use stable corner radius

5. 

Spot drilling a seam (forging/welding/casting seam)

▲ Reduce feed
▲ Use max. 3xD tools

6. 

Spot drilling an edge

▲ Reduce feed to 50%
▲ Use tough indexable inserts
▲ Use stable corner radius

7. 

Spot drilling convex surfaces

▲ Possible without any problems
▲ If necessary, reduce feed

8. 

Spot drilling angled surfaces

▲ From the interrupted cut, reduce the feed by up to 50%
▲ Use tough indexable inserts
▲ Use stable corner radius

9. 

Spot drilling a pointed contour

▲ Reduce the feed by up to 40% in the area where cutting is interrupted

10. 

Stack plate drilling

▲ Use holder with 80° positioning
▲ Good workpiece clamping required
▲ Max. gap size = 1 mm

11. 

Large hole offset

▲ Possible without any problems
▲ Axial-radial cut distribution, see graphic: Cut distribution

12. 

Adjustable in diameter

▲ Possible without any problems

Problems / possible causes / solutions – Counterboring and fine boring

1. No chip breakage

▲ Cutting depth a_p too low for cutting edge topography used	→ If necessary, increase the cutting depth a_p → Use cutting edge topography for small to medium cutting depths
▲ Cutting depth a_p too big for cutting edge topography used	→ Reduce cutting depth a_p → Axial-radial cut distribution → Use cutting edge topography for larger cutting depths
▲ Feed/tooth too low	→ Increase feed/tooth
▲ RPM too high	→ Reduce RPM
▲ Cutting edges not same length axially	→ Correct axial offset: Use holder with axial length compensation

2. Chip jamming

▲ Unfavourable chip shape	→ Increase feed → Use cutting edge topography with chip breaker → Axial-radial cut distribution → See measures: 1. No chip breakage
▲ Workpiece clamping	→ In the case of through holes, check there is sufficient space for pecking behind the component
▲ Cooling lubricant pressure/quantity too low	→ Improve cooling lubricant pressure/quantity

3. Conical hole

→ See measures: 1. No chip breakage

4. Poor surface quality

▲ Feed too high	→ Reduce feed
▲ Cutting speed too low	→ Increase cutting speed
▲ Cutting radius too small	→ Use indexable insert with a larger cutting radius → Use indexable insert with wiper geometry
▲ Rake angle of the indexable insert too small	→ Use indexable insert with positive cutting edge geometry
▲ Built-up edge	→ Use indexable insert with positive cutting edge geometry → Use indexable insert with wider chip breaker groove
▲ Unfavourable chip shape	→ See measures: 1. No chip breakage → See measures: 2. Chip jam

5. Vibration

▲ Tool design – high L/D ratio	→ If necessary, check tool design → If possible, consistently avoid the same boring bar Ø → If possible, stepped tool design; design tool to be as stable as possible → Check axial-radial cutting settings → Use vibration-optimised boring bar, if necessary → Use HMD damping element, if necessary
▲ Feed too high	→ Reduce feed
▲ Cutting speed too high	→ Reduce cutting speed, see graphic: Selection of the cutting speed depending on the overhang length
▲ Depth of cut too big	→ Reduce depth of cut → Axial-radial cut distribution
▲ Cutting edge geometry too blunt	→ Use indexable insert with positive cutting edge geometry → Use indexable insert with wider chip breaker groove
▲ Cutting radius too big	→ Use indexable insert with a smaller cutting radius, see graphic: Selection of the cutting radius depending on the overhang length and the depth of cut

Types of wear

Wear on clearance face

Abrasion on the flank: normal wear after a certain period of operation.

Cause
- Cutting speed too high
- Carbide grade does not have enough wear resistance
- Feed not adapted to application

Remedy
- Reduce cutting speed
- Select a carbide grade with high wear resistance
- Bring feed into the right relationship with cutting speed and cutting depth

Edge chipping



Increased mechanical stress on the cutting edge may result in carbide particles breaking off.

Cause
- Grade with too high a wear resistance
- Vibrations on tool or workpiece
- Feed rate or cutting depth is too high
- Built-up edge
- Interrupted cut
- Chip stroke

Remedy
- Use tougher grade
- Improve stability (tool, workpiece)
- Avoid built-up edges

Cratering



The outgoing hot chip is causing cratering of the cutting insert on the clamping surface.

Cause
- Cutting speed too high, feed too high
- Rake angle too low
- Grade does not have enough wear resistance
- Incorrectly supplied coolant

Remedy
- Reduce cutting speed and/or feed rate
- Choose carbide grades with greater wear-resistance
- Increase quantity and/or pressure of coolant, check supply
- Use a more crater-resistant grade

Plastic deformation



High machining temperature with simultaneous mechanical stress can lead to plastic deformation.

Cause
- Working temperature too high, softening of the base material
- Damage to the coating
- Grade does not have enough wear resistance
- Incorrectly supplied coolant

Remedy
- Reduce cutting speed
- Select more wear-resistant, more thermally stable carbide grade
- Make provisions for cooling / check supply

Built-up edge



Material builds up on the cutting edge if the chip does not flow correctly due to the cutting temperature being too low.

Cause
- Cutting speed to low
- Rake angle too small
- Incorrect cutting material
- Missing coolant/lubrication

Remedy
- Increase cutting speed
- Increase rake angle
- Use TiN coating
- Make provisions for cooling / increase oil content of emulsion

Insert breakage



If a cutting insert is overloaded, insert breakage may occur.

Cause
- Cutting material overloaded (extreme values)
- Lack of stability
- Wedge angle too small
- Interference contours were not taken into account
- Interrupted cut

Remedy
- Use a tougher cutting material
- Use chamfer for edge protection
- Increase rounding of cutting edge
- Use more stable geometry
- Check cutting data
- Check interference contours

Chip breakers

-SF14

- Rake angle 14°
- Specially developed chip breakers with remarkable chip control for a range of applications, from fine finishing to medium machining

-SF15

- Rake angle 15°
- Balanced geometry: high stability with high cutting edge sharpness
- Excellent chip control with minimum susceptibility to built-up edge formation
- Particularly good chip breakage with small and medium feeds
- Initial recommendation for machining C-steel, alloyed and stainless steels

-SF16

- Rake angle 15°
- Balanced geometry: High stability for high cutting edge sharpness
- Large chip chamber, therefore good chip control at low feeds
- Initial recommendation for machining C-steel, alloyed and stainless steels

-SF20

- Rake angle 20°
- Particularly smooth cutting thanks to the extremely positive rake angle
- Excellent chip control with minimum susceptibility to built-up edge formation
- Perfect cutting performance thanks to the extremely positive rake angle, particularly with low depths of cut and feeds
- Initial recommendation for machining stainless steel, alloy steels, carbon steel and non-ferrous metals

-SF30

- Rake angle 15°
- Balanced geometry: High stability for high cutting edge sharpness
- Chip breaker geometry: Very good chip breakage for small and medium feeds
- Initial recommendation for machining C-steel, alloyed and stainless steels

-01

- Rake angle 12°
- All-round topography chamfered, rounded
- Very smooth-cutting thanks to positive cutting edge geometry
- Also suitable for less-powerful machines and unstable workpieces
- Easily controllable chip formation also in less solid materials

-02

- Rake angle 0°
- Roughing topography, extremely stable (significant wedge angle)
- Excellent chip formation for chips that are difficult to control
- Only suitable for small cutting depths < 1.5 mm under certain circumstances

-11

- Rake angle 20°
- Highly positive, minimally rounded chip breaker
- For soft cutting use
- Main application in aluminum

-12

- Rake angle 30°
- Peripheral ground indexable insert with pressed chip breaker
- Highly positive, sharp and all-round cutting edge, therefore extremely smooth-cutting
- Peripheral ground flanks guarantee controlled chip formation and best surface quality at low cutting forces

-14

- Rake angle 14°
- Peripheral ground, sintered topography
- Controlled chip formation in fine and extremely fine machining

-15

- Rake angle 15°
- Semi-finishing chip breaker; peripheral ground, sintered
- Controlled chip formation in fine and extremely fine machining

-18

- Rake angle 14°
- Peripheral ground and sintered topography
- Controlled chip formation in fine and extremely fine machining
- Positive wiper geometry for maximum demands on surface quality

-G06

- Rake angle 6°
- For P / M / K materials
- High stability due to significant wedge angle

-G12

- Rake angle 12°
- For P / N / S materials
- Extremely smooth-cutting thanks to positive cutting edge geometry
- Extremely suitable for less-powerful machines and unstable workpieces
- Easily controllable chip formation also in less solid materials

Type

K10

- Carbide, uncoated
- ISO | **K10**
- Uncoated carbide grade for machining grey cast iron or non-ferrous metals, depending on the cutting edge geometry

BK2710

- Carbide, TiAlN-coated
- ISO | P10 | M10 | **K10**
- Extremely wear-resistant carbide grade for machining stainless steels, structural steels and tool steels as well as cast iron materials

BK60

- Carbide, TiC-TiCN-TiN-coated
- ISO | P25 | **M10**
- Multi-layer coating for long service life even in the upper cutting speed range

BK6110

- Carbide, TiCN-TiN-Al_2O_3-coated
- ISO | P10 | **K10**
- Wear-resistant carbide grade for machining cast iron and steel materials

BK6115

- Carbide, TiCN-TiN-Al_2O_3-coated
- ISO | **P20** | **K20** | H20
- High-quality, surface-treated coating for machining cast iron materials in normal to stable conditions and at high cutting speeds

BK6440

- Carbide, CVD-TiCN-Al_2O_3-TiN coated
- ISO | **M25** | **K35**
- Extremely tough standard grain grade; good wear resistance in steel and stainless steel materials, even in unfavourable cutting conditions / interrupted cut

BK7615

- Carbide, TiCN-Al_2O_3-coated
- ISO | **K15**
- Highly productive grade with extreme edge stability for wet and dry machining of all cast iron materials

BK77

- Carbide, TiN-coated
- ISO | **S10** | H10 | O10
- The wear-resistant carbide grade for machining aluminum alloys, superalloys and plastics at medium cutting speeds

BK7710

- Carbide, TiB_2-coated
- ISO | **N10** | S10 | O10
- The wear-resistant grade with optimum cutting characteristics to prevent built-up edge formation for machining aluminium and titanium alloys

BK7935

- Carbide, AlTiN-coated
- ISO | **P35** | **M30** | **K30** | N30 | **S30** | O30
- The tough carbide grade for machining stainless steel and acid-resistant steels as well as special alloys

BK8425

- Carbide, TiAlN/TiN-coated
- ISO | **P25** | **M25** | **K25**
- Universal grade with greater wear resistance thanks to innovative PVD multi-layer coating

BK8430

- Carbide, TiAlN/TiN-coated
- ISO | **P25** | **M25**
- Fine-grain grade with high wear resistance
- Extreme edge stability and maximum wear resistance in the middle and top speed range

BK8440

- Carbide, TiCN-TiN-coated
- ISO | **P35** | M10
- Very tough carbide grade for medium cutting speeds and interrupted cut

Type

CBN40

- Cubic boron nitride, uncoated
- ISO | **H05**
- Uncoated cutting material made of cubic boron nitride for machining hardened steels over 45 HRC, heat-resistant nickel-based or cobalt-based alloys

CK32

- Cermet, uncoated
- ISO | **P10** | **M15** | K05 | N15
- For fine and finish turning
- Less wear and greater cutting speed result in longer tool life and high surface quality
- Cutting material for high productivity in the top cutting speed range

CK3230

- Cermet, uncoated
- ISO | **P20** | **M20** | K10 | N20
- Extremely tough behaviour with good wear resistance suitable for use also in interrupted cut

CTDPU20

- Polycrystalline diamond cutting material with mixed grain, uncoated
- ISO | **N15**
- Outstanding wear resistance, even where Si content > 12 % and high proportion of abrasive reinforcements
- Used in plastics and fibre composites (GFK, CFK)

CWC06

- Cermet, TiC/TiN-coated
- ISO | **P10** | M10 | **K10** | N10
- Coated cermet grade for fine boring at high cutting speed and with a uniform cut

CWC10

- Cermet, uncoated
- ISO | **P15** | **M10** | K10
- The uncoated cermet grade for finish machining of stainless and hardened steel
- Particularly wear-resistant due to high heat resistance

CWN10

- Carbide, TiN-coated
- ISO | **K10**
- The carbide grade for machining steels, stainless steels and non-ferrous metals

CWP25

- Carbide, uncoated
- ISO | **P25** | **M25** | K25 | **N25** | S25
- Uncoated carbide grade for fine boring with large hole depths and small machining allowances

Coatings

TiN

- TiN coating
- Maximum application temperature: 450 °C

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Tool types/coloured rings	5
Thread types/chamfer forms/cutting materials	6
Application areas/special features	7
Toolfinder	8+9
Taps Overview	10–15
Product programme	16–99
Technical Information	
Thread core hole diameter for tapered threads	100
Tapped hole pilot diameter	101
Thread former pilot hole diameter	102
Thread tolerances and recommended manufacturing tolerances	103
Thread formers – further information	104
Troubleshooting	105
Coatings	106

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

M	Thread type Explanation of the thread types can be found on → **Page 6**
UNI NCW	Application range Special feature An explanation of the areas of application/ special features can be found on → **Page 7**
C 2–3	Chamfer form An explanation of the chamfer forms can be found on → **Page 6**
ISO 2 6H	Tolerance Explanation of the tolerances can be found on → **Page 103**
TiN	Coating An explanation of the coatings can be found on → **Page 106**
	Cooling agent supply

	Coloured ring An explanation of the coloured rings can be found on → **Page 5**
HSS-E	Tool Material An explanation of the cutting materials can be found on → **Page 6**
FHA 42°	Helix angle
≤ 1100 N/mm²	Tensile strength
	Through hole thread
	Blind hole thread
	Through hole thread and blind hole thread

The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type!
The values indicated represent possible cutting data which may need to be corrected depending on operating conditions !

Tool types

TruTap

Through hole tap type TruTap

- For through holes up to 4xD
- Lead Form B: 3.5–5 cutting leads, with spiral point
- Straight Flutes
- Also suitable for synchronised machining, with Weldon flat and with extra long version
- Due to the special geometry of the flutes, the chips are removed in the direction of cut

TruTap DL



Through hole tap type TruTap DL

- For through holes up to 4xD
- Lead Form C: 3.5–5 cutting leads, without spiral point
- 15° left hand helix
- Suitable for steel, titanium alloys and Inconel 718
- The chips are discharged in the direction of cut

CavTap

Blind hole tap type CavTap

- For blind holes up to 3xD
- Lead Form C: 2–3 cutting leads, without spiral point
- Lead Form E: 1.5–2 cutting leads, without spiral point
- (35°, 42°, 45°, 50°) right hand helix
- Also suitable for syncronised machining, with Weldon flat, with extra long version and through coolant
- The high helix angle ensures chips are discharged effectively against the direction of cut

CavTap SL



Blind hole tap type CavTap SL

- For blind holes up to 2xD
- Lead Form C: 2–3 cutting leads, without spiral point
- Lead Form E: 1.5–2 cutting leads, without spiral point
- (15°, 25°, 30°) slow right hand helix
- For steel, titanium alloys and Inconel 718
- Also suitable for synchronised machining, with extra long version and through coolant
- Also suitable for difficult operating conditions such as cross holes

DuoTap



Through and blind hole tap Type DuoTap

- For blind and through holes up to 2xD
- Lead Form C: 2–3 cutting leads, without spiral point
- Lead Form D: 3.5–5 cutting leads, without spiral point
- Lead Form E: 1.5–2 cutting leads, without spiral point
- Straight Flutes
- For steel, short chipping and hardened materials to 55 (62) HRc
- Also with extra long version and through coolant

DuoForm

Thread former type DuoForm

- For blind and through holes up to 3xD
- Lead Form C: 2–3 cutting leads, without spiral point
- For cold formable materials up to 1400 N/mm²
- Suitable for synchronised machining, with lubrication grooves and internal cooling

Coloured rings

for steel up to 750 N/mm²

ST

ST application area:
uncoated taps for steels up to a tensile strength of 750 N/mm²

for corrosion and acid-resistant steels

VA

VA application area:
for stainless steels

for hardened steels

HT

HT application area:
for hard machining

for steel to 1100 N/mm²

ST

VG

ST and VG application area:
coated taps for steels up to a tensile strength of 1100 N/mm²

for heat resistant alloys

Ti

Ni

Ti and Ni application area:
for heat-resistant steels, titanium and Inconel

for aluminium and non-ferrous metal

NW

Ms

Soft

AMPCO

NW, Soft, Ms and AMPCO application area:
for aluminium, short-chipping brass and soft materials

for steel up to 1400 N/mm²

HR

HR application area:
for steels up to a tensile strength of 1400 N/mm²

for cast iron materials

GG

GG application area:
for cast iron materials

for universal application up to 1100 N/mm²

UNI

UNI application area:
for universal application

→ **Page 7**
Here you will find a detailed explanation of the areas of application.

6

Thread types

M	ISO metric coarse thread DIN 13
MF	ISO Metric fine thread DIN 13
G	Whitworth pipe thread DIN EN ISO 228
UNC	Unified coarse thread ASME B1.15 and ISO 3161
UNF	Unified fine thread ASME B1.1
EG M	ISO Metric coarse thread for wire inserts DIN 8140-2
EG UNC	EG Unified coarse thread for wire inserts ASME B18.29.1
EG UNF	EG Unified fine thread for wire inserts ASME B18.29.1
UNJC	Unified coarse thread ASME B1.15 and ISO 3161
UNJF	Unified extra fine thread ASME B1.15 and ISO 3161
BSW	Whitworth thread BS84
NPT	American taper pipe thread with sealing (1:16) ANSI/ASME B1.20.1
NPTF	American taper pipe thread with sealing (1:16) ANSI/ASME B1.20.3
Rc	Whitworth taper pipe thread (1:16) DIN EN 10226-2 (ISO7-1)
Rp	Cylindrical Whitworth coarse thread DIN EN 10226-1 (ISO7-1)

These thread types, as well as hand taps and dies, are available in the online shop.

Chamfer forms

B 4–5	Form B (with spiral point, 4–5 thread lead)
C 2–3	Form C (without spiral point, 2–3 thread lead)
D 4–5	Form D (without spiral point, 4–5 thread lead)
E 1,5–2	Form E (without spiral point, 1.5–2 thread lead)

Cutting materials

HSS	High-speed steel
HSS-E	High-performance high speed steel
HSS-E / HM	HSS-E base support material cutting/forming medium: HM
HSS-PM	High-performance sintered high-speed steel
Solid carbide	Solid carbide

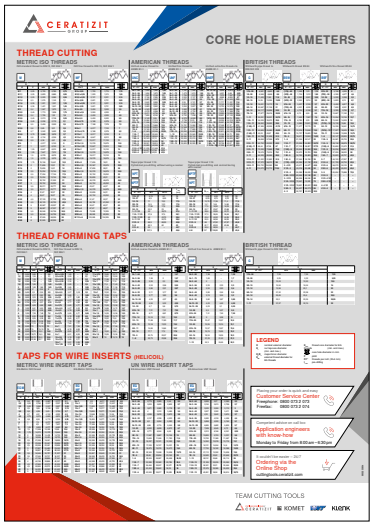

A must-have for your production processes!

Thread core hole diameters at a glance thanks to the CERATIZIT workshop poster!

To receive a copy in your national language, please contact your sales representative.

Application areas

WNT \ Performance

UNI	for universal application up to 1100 N/mm²
ST	for good quality free machining steel
FE	Dies for steel
VG	for tempered and heat-resistant steels < 1100 N/mm²
HR	for high-tensile steels < 1400 N/mm²
VA	for stainless and acid-resistant steels up to 1100 N/mm²
GG	for cast iron
NW	For aluminium
Soft	For soft materials
Ms	for short chipping brass
AMPCO	For Ampco alloys
Ti	For titanium and titanium alloys
Ni	special for Inconel 718
HT	for hardened steel and chilled iron up to 55 HRc

EC	DuoForm thread former for universal use
NEO	DuoForm thread former for heat-resistant alloys
ERGO	Hand Taps for stainless, heat-resistant and heat-treated steels up to 1100 N/mm²
ERGO F.T	Hand tap for steel up to 1400 N/mm², wolfram, chilled iron

Tools for these application areas are available in the online shop.

WNT \ Standard

UNI	for universal application up to 1000 N/mm²
FE	for steel to 850 N/mm²
FE-HF	for high-tensile steel to 1100 N/mm²
VA	for corrosion and acid-resistant steels
GG	for cast iron
AL	for aluminium and aluminium alloys

Special Features

AUT	short version for automatic use
AZ	with intermittent teeth, reduces friction
CNC	for synchronised CNC machining with minimum length compensation chuck
DRY	for dry machining or minimum quantity lubrication (MMS)
EL	extra long, with double overall length
ES	extra short
HML	with soldered-in carbide strips for a higher cutting speed
LH	for left hand threads

MMB	Machine taps
NC	for synchronised CNC machining with minimum length compensation chuck
NCW	with Weldon flat for synchronised CNC machining without length compensation chuck
R_z=1	Lapped Dies
S	with back taper, for deep threads
SN	Thread formers with lubrication grooves
TS	for high-speed machining, up to 100 m/min.

Toolfinder

Thread formers

		Machining	Application range	WNT \ Standard M	MF	G	UNC	UNF
UNI	for cold-formable materials		UNI	54	72			

HSS taps

UNI	for universal use up to 1000 N/mm² **WNT Standard** up to 1100 N/mm² **WNT Performance**		UNI	26+27	59+60	74	81	89
			UNI	42+43	65	77	83	92
P	for steels up to 850 N/mm² **WNT Standard** up to 1100 N/mm² **WNT Performance**		FE	27	60			
			FE	43	66			23 282... 23 283...
P	for high-strength steels up to 1100 N/mm² **WNT Standard** up to 1400 N/mm² **WNT Performance**		FE-HF	27			81	
			FE-HF	43			83	
M	for corrosion and acid-resistant steels		VA	28	60		81	
			VA	43+44	67		83	92
K	for cast iron materials		GG	50				
N	for aluminium and non-ferrous metal		AL	28				
			AL	44				
S	for heat-resistant materials							
H	Hard materials							

→ **Page 10–15**
Here you will find the taps overview with tools for other applications.

This article can be found in our online shop at cuttingtools.ceratizit.com

Tool type	Application range	WNT \ Performance														
		M	EG M	MF	G	UNC	EG UNC	UNJC	UNF	EG UNF	UNJF	BSW	NPT	NPTF	Rp	Rc
DuoForm	EC	51+52		71	79	84			93							
TruTap	UNI	16–18	55	57+58	73	80	85		88	94		22 626... 22 627...				
CavTap	UNI	29–31	56	61+62	75+76	82	86		90	95		22 628... 22 629...				
TruTap	ST	19+20		58												
CavTap	ST	32+33			76											
DuoTap	ST	45+46											98	22 367... 22 382...	22 381...	22 389...
TruTap	HR	20														
CavTap	HR	34														
DuoTap	HR	45+46		68+69	78											
TruTap	VA	21			73	80										
CavTap	VA	35			76	82			90				96			
DuoTap	GG	47		22 173...												
TruTap	NW															
CavTap	NW	36														
DuoTap	AMPCO	22 030...														
TruTap	Ti	22				80					22 167...					
CavTap SL	Ti	37				22 262...		87	91		22 168...					
DuoTap	HT	48														

→ Page 99
Here you will find shank extensions for taps.

Thread-cutting oils can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
M	**Metric ISO standard thread**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	ISO 2 6H ISO 3 6G 7G	HSS-E	■		16+17	
UNI CNC	TruTap	B 4–5	ISO 2X 6HX ISO 3X 6GX 7GX	HSS-E	■		18	
UNI NCW	TruTap	B 4–5	ISO 2 6H	HSS-PM	■		18	
UNI EL	TruTap	B 4–5	ISO 2 6H	HSS-E	■		24	
UNI		B 4–5	ISO 2 6H	HSS-E HSS-PM	■			26
UNI NC		B 4–5	ISO 2 6H	HSS-E	■			27
UNI NCW		B 4–5	ISO 2 6H	HSS-PM	■			27
	UNI – Blind hole thread							
UNI	CavTap	C 2–3	ISO 2 6H 7G	HSS-E	■		29	
UNI	CavTap	E 1,5–2	ISO 2 6H	HSS-E	■	●	30	
UNI		C 2–3	ISO 2 6H	HSS-E HSS-PM	■			42
UNI NC		C 2–3	ISO 2 6H	HSS-E	■			42
UNI NCW	CavTap	C 2–3	ISO 2 6H	HSS-PM	■		30	
UNI NCW		C 2–3	ISO 2 6H	HSS-PM	■			43
UNI CNC	CavTap	C 2–3	ISO 2X 6HX ISO 2 6H 7G	HSS-E	■		31	
UNI CNC	CavTap	E 1,5–2	ISO 2 6H	HSS-E	■	●	31	
UNI CNC	CavTap	C 2–3	ISO 3 6G	HSS-E	■		22 588..., 22 589...	
UNI	CavTap	C 2–3	ISO 1 4H	HSS-E	■		22 528...	
UNI	CavTap	E 1,5–2	ISO 3 6G	HSS-E	■		22 530...	
UNI S	CavTap	C 2–3	ISO 2 6H	HSS-E	■		22 536..., 22 537...	
UNI ES	CavTap	E 1,5–2	ISO 2 6H	HSS-E	■		38	
UNI EL	CavTap	C 2–3	ISO 2 6H	HSS-E	■		40	
UNI	CavTap SL	C 2–3	ISO 2 6H	HSS-E	□		22 516...	

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
M	**Metric ISO standard thread**							
	P – Through hole thread							
ST	TruTap	B 4–5	ISO 2 6H	HSS-E	□		19	
ST LH	TruTap	B 4–5	ISO 2 6H	HSS-E	□		19	
ST	TruTap	B 4–5	ISO 1 4H	HSS-E	□		22 002..., 22 003...	
ST	TruTap	B 4–5	ISO 3 6G	HSS-E	□		22 004...	
ST TS	TruTap	B 4–5	ISO 2X 6HX	HSS-E	■		20	
HR	TruTap	B 4–5	ISO 2X 6HX	HSS-PM	■		20	
VG	TruTap	B 4–5	ISO 2X 6HX	HSS-E	■		20	
ST EL	TruTap	B 4–5	ISO 2 6H	HSS-E	□		24	
ST MMB		≈ 20	ISO 2 6H	HSS-E	□		25	
FE		B 4–5	ISO 2 6H	HSS-E	□			27
FE-HF		B 4–5	ISO 2 6H	HSS-E	■			27
	P – Blind hole thread							
ST	CavTap	C 2–3	ISO 2 6H	HSS-E	■□		33	
ST	CavTap	C 2–3	ISO 3 6G	HSS-E	□		22 134..., 22 135...	
ST CNC	CavTap SL	C 2–3	ISO 2X 6HX	HSS-E	■	●	32	
ST ES	CavTap SL	C 2–3	ISO 2 6H	HSS-E	□		39	
ST EL	CavTap	C 2–3	ISO 2 6H	HSS-E	□		40	
ST EL	CavTap SL	E 1,5–2	ISO 2 6H	HSS-E	□		41	
HR	CavTap SL	C 2–3	ISO 2 6H	HSS-PM	■		32	
HR	CavTap	C 2–3	ISO 2 6H	HSS-PM	■□		34	

This article can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
M	**Metric ISO standard thread**							
FE		C 2–3	ISO 2 6H	HSS-E	□			43
FE-HF		C 2–3	ISO 2 6H	HSS-E	■			43
	P – Through hole thread and blind hole thread							
ST	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	□		45+46	
ST AZ	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	□		22 111..., 22 113...	
HR	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	■		45+46	
HR EL	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	■		49	
	M – Through hole thread							
VA	TruTap	B 4–5	ISO 2 6H	HSS-E	■		21	
VA		B 4–5	ISO 2 6H	HSS-PM HSS-E	■			28
	M – Blind hole thread							
VA	CavTap	C 2–3	ISO 2 6H	HSS-E	■		35	
VA	CavTap	E 1,5–2	ISO 2 6H	HSS-E	■	●	35	
VA		C 2–3	ISO 2 6H	HSS-E HSS-PM	■□			43+44
	K – Through hole thread and blind hole thread							
GG	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	■	●	47	
GG		C 2–3	ISO 2X 6HX	HSS-E	■			50
	N – Through hole thread							
Soft	TruTap	B 4–5	ISO 2 6H	HSS-E	■		22 305...	
AL		B 4–5	ISO 2 6H	HSS-E	■□			28
	N – Blind hole thread							
Soft	CavTap	C 2–3	ISO 2 6H	HSS-E	□		36	
NW	CavTap	C 2–3	ISO 2 6H	HSS-E	■		36	
AL		C 2–3	ISO 2 6H	HSS-E	■□			44

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
M	**Metric ISO standard thread**							
	N – Through hole thread and blind hole thread							
AMPCO	DuoTap	C 2–3	ISO 2X 6HX	HSS-PM	□		22 030...	
Ms	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	□		22 119...	
	S – Through hole thread							
Ti	TruTap	B 4–5	ISO 1X 4HX ISO 2X 6HX	HSS-PM	■		22	
Ti	TruTap DL	D 4–5	ISO 2X 6HX	HSS-E	■		23	
Ni	TruTap DL	D 4–5	ISO 2X 6HX	HSS-E	■		23	
	S – Blind hole thread							
Ti	CavTap SL	C 2–3	ISO 2X 6HX	HSS-PM	■		37	
Ni	CavTap SL	C 2–3	ISO 2X 6HX	HSS-PM	■		37	
	H – Through hole thread and blind hole thread							
HT	DuoTap	D 4–5	ISO 2X 6HX	VHM	■		48	
HT	DuoTap	C 2–3	ISO 2X 6HX	HSS-PM	■		48	
	Machine thread formers							
EC	DuoForm	C 2–3	ISO 2X 6HX	HSS-E	■		51	
EC SN	DuoForm	C 2–3	ISO 2X 6HX ISO 3X 6GX	HSS-E	■		52	
NW HML	DuoForm	C 2–3	ISO 2X 6HX	HSS-E	□	●	51	
NEO SN	DuoForm	C 2–3	ISO 2X 6HX	HSS-PM	■	●	53	
UNI		C 2–3	ISO 2X 6HX	HSS-E	■			54
UNI SN		C 2–3	ISO 2X 6HX	HSS-E	■			54
	Hand taps							
ST		C 2–3	ISO 2X 6HX	VHM	□		22 800...	
ST		C 2–3	ISO 2X 6HX	HSS-E	□		22 010...	
ERGO		C 2–3	ISO 2X 6HX	HSS-E	□		22 012...	
ERGO F.T.		C 2–3	ISO 2X 6HX	HSS-E	■		22 013...	

6

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
M	**Metric ISO standard thread**							
	Dies							
FE		1,5–2	ISO 6g ISO 6e	HSS	□		22 700..., 22 701...	
FE		1,5–2	ISO 6g	HSS	□		23 910...	
FE LH		1,5–2	ISO 6g	HSS	□		22 702...	
VA		2	ISO 6g	HSS-E	□		22 704...	
VA R_z=1		2	ISO 6g	HSS-E	□		22 705...	
EG M	**ISO metric coarse thread for wire inserts**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	6H mod	HSS-E	■		55	
	UNI – Blind hole thread							
UNI	CavTap	C 2–3	6H mod	HSS-E	■		56	
MF	**Metric ISO fine thread**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	ISO 2 6H	HSS-E	■		57+58	
UNI	TruTap	B 4–5	ISO 3 6G	HSS-E	■		22 599...	
UNI		B 4–5	ISO 2 6H	HSS-PM HSS-E	■			59+60
	UNI – Blind hole thread							
UNI	CavTap	E 1,5–2	ISO 2 6H ISO 3 6G	HSS-E	■		61	
UNI	CavTap	C 2–3	ISO 2 6H	HSS-E	■		62	
UNI		C 2–3	ISO 2 6H	HSS-PM HSS-E	■			65+66

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
MF	**Metric ISO fine thread**							
UNI CNC	CavTap	E 1,5–2	ISO 3 6G	HSS-E	■		22 561...	
UNI CNC	CavTap	E 1,5–2	ISO 2 6H 7G	HSS-E	■		62	
UNI NC		E 1,5–2	ISO 2 6H	HSS-E	■			66
	P – Through hole thread							
ST TS	TruTap	B 4–5	ISO 2X 6HX	HSS-E	■		58	
FE		B 4–5	ISO 2 6H	HSS-E	□			60
	P – Blind hole thread							
ST TS	CavTap	C 2–3	ISO 2 6H	HSS-E	■		22 216...	
ST	CavTap SL	C 2–3	ISO 2 6H	HSS-E	□		63	
FE		C 2–3	ISO 2 6H	HSS-E	□			66
	P – Through hole thread and blind hole thread							
ST	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	□		22 171...	
ST ES	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	□		70	
ST LH/ES	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	□		70	
HR	DuoTap	C 2–3	ISO 2X 6HX	HSS-E	■		68+69	
	M – Through hole thread							
VA		B 4–5	ISO 2 6H	HSS-E	■			60
	M – Blind hole thread							
VA	CavTap	E 1,5–2	ISO 2 6H	HSS-E	■		64	
VA		E 1,5–2	ISO 2 6H	HSS-E	■			67

This article can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
MF	**Metric ISO fine thread**							
	Machine thread formers							
EC SN	DuoForm	C 2–3	ISO 2X 6HX	HSS-E	■		71	
EC HML	DuoForm	C 2–3	ISO 2X 6HX	HSS-E	■	💧	71	
UNI SN		C 2–3	ISO 2X 6HX	HSS-E	■			72
	Dies							
FE		1,5–2	ISO 6g	HSS	□		22 711...	
VA		2	ISO 6g	HSS-E	□		22 714...	
G	**Whitworth pipe thread**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	ISO 228	HSS-E	■		73	
UNI		B 4–5	ISO 228	HSS-E	■			74
	UNI – Blind hole thread							
UNI	CavTap	C 2–3	ISO 228	HSS-E	■		75	
UNI	CavTap	E 1,5–2	ISO 228, ISO 228 +0,05	HSS-E	■		75	
UNI CNC	CavTap	E 1,5–2	ISO 228	HSS-E	■		76	
UNI		C 2–3	ISO 228	HSS-E	■			77

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
G	**Whitworth pipe thread**							
	P – Through hole thread							
FE		B 4–5	ISO 228	HSS-E	□			23 260...
	P – Blind hole thread							
ST	CavTap	C 2–3	ISO 228	HSS-E	□		76	
ST	CavTap SL	C 2–3	ISO 228	HSS-E	□		22 353...	
FE		C 2–3	ISO 228	HSS-E	□			23 261...
	P – Through hole thread and blind hole thread							
HR	DuoTap	C 2–3	ISO 228X	HSS-E	■		78	
	M – Through hole thread							
VA	TruTap	B 4–5	ISO 228	HSS-E	■		73	
	M – Blind hole thread							
VA	CavTap	E 1,5–2	ISO 228	HSS-E	■		76	
	K – Through hole thread and blind hole thread							
GG	DuoTap	C 2–3	ISO 228X	HSS-E	■		22 348...	
	Machine thread formers							
EC SN	DuoForm	C 2–3	ISO 228	HSS-E	■		79	
	Dies							
FE		1,5–2	ISO 228A	HSS	□		22 741...	

6

This article can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
UNC	**Unified coarse thread**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	2B	HSS-E	■		80	
UNI		B 4–5	2B	HSS-E	■			81
	UNI – Blind hole thread							
UNI	CavTap	C 2–3	2B	HSS-E	■		82	
UNI		C 2–3	2B	HSS-E	■			83
	P – Through hole thread							
FE-HF		B 4–5	2B	HSS-E	■			81
	P – Blind hole thread							
ST	CavTap	C 2–3	2B	HSS-E	□		22 264...	
FE-HF		C 2–3	2B	HSS-E	■			83
	M – Through hole thread							
VA	TruTap	B 4–5	2B	HSS-E	■		80	
VA		B 4–5	2B	HSS-E	■			81
	M – Blind hole thread							
VA	CavTap	C 2–3	2B	HSS-E	■		82	
VA		C 2–3	2B	HSS-E	□			83
	S – Through hole thread							
Ti	TruTap	B 4–5	2BX	HSS-PM	■		80	
	S – Blind hole thread							
TI	CavTap SL	C 2–3	2BX	HSS-PM	■		22 262...	
	Machine thread formers							
EC	DuoForm	C 2–3	2BX	HSS-E	■		22 270...	
EC SN	DuoForm	C 2–3	2BX	HSS-E	■		84	

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
UNC	**Unified coarse thread**							
	Dies							
FE		1,5–2	2A	HSS	□		22 721...	
EG UNC	**Unified coarse thread for wire inserts**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	2B mod	HSS-E	■		85	
	UNI – Blind hole thread							
UNI	CavTap	E 1,5–2	2B mod	HSS-E	■		86	
UNJC	**Unified coarse thread**							
	S – Blind hole thread							
Ti	CavTap SL	C 2–3	3BX	HSS-E	■		87	
UNF	**Unified fine thread**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	2B	HSS-E	■		88	
UNI		B 4–5	2B	HSS-E	■			89
	UNI – Blind hole thread							
UNI	CavTap	C 2–3	2B	HSS-E	■		90	
UNI	CavTap	E 1,5–2	2B +0,05	HSS-E	■		90	
UNI		C 2–3	2B	HSS-E	■			92
	M – Blind hole thread							
VA	CavTap	E 1,5–2	2B	HSS-E	■		90	
VA		C 2–3	2B	HSS-E	□			92

This article can be found in our online shop at cuttingtools.ceratizit.com

Taps Overview

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
UNF	**Unified fine thread**							
	S – Blind hole thread							
Ti	CavTap SL	C 2–3	2BX 3BX	HSS-PM	■		91	
	Thread formers							
EC SN	DuoForm	C 2–3	2BX	HSS-E	■		93	
EG UNF	**Unified Fine Thread for wire inserts**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	2B	HSS-E	■		94	
	UNI – Blind hole thread							
UNI	CavTap	E 1,5–2	2B	HSS-E	■		95	
UNJF	**Unified extra-fine thread**							
	S – Through hole thread							
Ti	TruTap DL	D 4–5	3BX	HSS-E	■		22 167...	
	S – Blind hole thread							
Ti	CavTap SL	C 2–3	3BX	HSS-E	■		22 168...	
BSW	**Whitworth thread**							
	UNI – Through hole thread							
UNI	TruTap	B 4–5	med.	HSS-E	■		22 626..., 22 627...	
	UNI – Blind hole thread							
UNI	CavTap	C 2–3	med.	HSS-E	■		22 628..., 22 629...	

Application Area / Special Features	Tool type	Chamfer form	Tolerance	Tool Material	coated ■ uncoated □	Coolant	WNT \ Performance	WNT \ Standard
NPT	**American taper pipe thread**							
	P – Through hole thread and blind hole thread							
ST ES	DuoTap	C 2–3		HSS-E	□		98	
VG	DuoTap	C 2–3		HSS-E	□		97	
VG AZ	DuoTap	C 2–3		HSS-E	□		22 377..., 22 378...	
	M – Blind hole thread							
VA	CavTap	C 2–3		HSS-E	■		96	
VA	CavTap	E 1,5–2		HSS-E	■		96	
NPTF	**American taper pipe thread**							
	P – Through hole thread and blind hole thread							
ST	DuoTap	C 2–3		HSS-E	□		22 382...	
VG	DuoTap	C 2–3		HSS-E	□		22 380...	
ST ES	DuoTap	C 2–3		HSS-E	□		22 367...	
Rp	**Cylindrical Whitworth thread**							
	P – Through hole thread and blind hole thread							
ST	DuoTap	C 2–3	X	HSS-E	□		22 381...	
Rc	**Tapered Whitworth thread**							
	P – Through hole thread and blind hole thread							
ST	DuoTap	C 2–3		HSS-E	□		22 389...	

Accessories

Shank extensions for taps	99
Thread cutting oil, chlorine free	22 950...
Thread cutting paste, chlorine free	

This article can be found in our online shop at cuttingtools.ceratizit.com

Through hole – Machine taps, right hand

TruTap | M

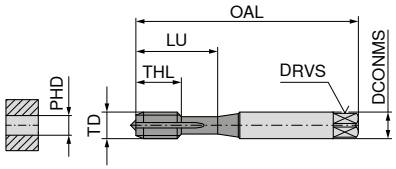

DIN 371 with reinforced shank

	UNI	UNI	UNI	UNI
	B 4–5	B 4–5	B 4–5	B 4–5
	ISO 2 6H	ISO 2 6H	ISO 3 6G	7G
	nitr. + vap.	TiN	nitr. + vap.	nitr. + vap.
	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
	22 501 ...	**22 503 ...**	**22 508 ...**	**22 510 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
M1	0,25	40	2,5	2,1	0,75	5	5	2	128,70	**010** [1]						
M1,2	0,25	40	2,5	2,1	0,95	5	5	2	122,20	**012** [1]						
M1,4	0,30	40	2,5	2,1	1,10	7	7	3	110,50	**014** [1]						
M1,6	0,35	40	2,5	2,1	1,25	8	11	3	77,62	**016**						
M1,7	0,35	40	2,5	2,1	1,35	6	11	2	119,40	**017**						
M1,8	0,35	40	2,5	2,1	1,45	6	11	2	164,00	**018**						
M2	0,40	45	2,8	2,1	1,60	7	12	2			53,40	**020**			65,59	**020**
M2	0,40	45	2,8	2,1	1,60	7	12	3	56,43	**020**						
M2,2	0,45	45	2,8	2,1	1,75	7	12	2	60,12	**022**						
M2,5	0,45	50	2,8	2,1	2,05	9	14	2	55,46	**025**			55,46	**025**	64,22	**025**
M3	0,50	56	3,5	2,7	2,50	11	18	3	41,54	**030**	45,10	**030**	45,10	**030**	51,91	**030**
M3,5	0,60	56	4,0	3,0	2,90	12	20	3	45,63	**035**						
M4	0,70	63	4,5	3,4	3,30	13	21	3	37,70	**040**	46,98	**040**	45,63	**040**	52,20	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	3	38,67	**050**	47,67	**050**	45,91	**050**	53,40	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3	39,22	**060**	53,84	**060**	46,98	**060**	54,78	**060**
M7	1,00	80	7,0	5,5	6,00	17	30	3	54,78	**070**						
M8	1,25	90	8,0	6,2	6,80	20	35	3	44,39	**080**	60,40	**080**	53,16	**080**	60,12	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3	53,29	**100**	84,16	**100**	64,22	**100**	73,37	**100**
M12	1,75	110	12,0	9,0	10,20	24	44	3	78,42	**120**						

P	**12**	**15**	**12**	**12**
M	**7**	**9**	**7**	**7**
K	**12**	**18**	**12**	**12**
N		**12**		
S				
H				
O				

1) Tol. ISO 1 4H ≤ M1.4

Cutting speed v_c (m/min.)

DIN 376 can be found on the next page

Through hole – Machine taps, right hand

TruTap | M

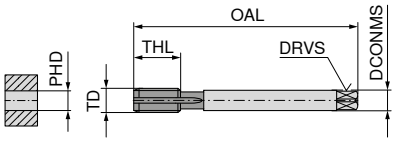

DIN 376 with reduced shank

	UNI	UNI	UNI	UNI
	B 4–5	B 4–5	B 4–5	B 4–5
	ISO 2 6H	ISO 2 6H	ISO 3 6G	7G
	nitr. + vap.	TiN	nitr. + vap.	nitr. + vap.
	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
	22 502 ...	**22 504 ...**	**22 509 ...**	**22 511 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
M3	0,50	56	2,2		2,5	11	3	76,92	**030**						
M4	0,70	63	2,8	2,1	3,3	13	3	51,24	**040**						
M5	0,80	70	3,5	2,7	4,2	15	3	48,92	**050**						
M6	1,00	80	4,5	3,4	5,0	17	3	47,96	**060**						
M8	1,25	90	6,0	4,9	6,8	20	3	52,59	**080**						
M10	1,50	100	7,0	5,5	8,5	22	3	60,94	**100**						
M12	1,75	110	9,0	7,0	10,2	24	3	59,58	**120**	96,86	**120**	73,78	**120**	83,36	**120**
M14	2,00	110	11,0	9,0	12,0	26	3	85,93	**140**	143,40	**140**				
M16	2,00	110	12,0	9,0	14,0	27	3	86,90	**160**	124,70	**160**	108,40	**160**	126,30	**160**
M18	2,50	125	14,0	11,0	15,5	30	3	170,90	**180**	225,30	**180**				
M20	2,50	140	16,0	12,0	17,5	32	3	132,90	**200**	232,20	**200**	165,40	**200**		
M22	2,50	140	18,0	14,5	19,5	32	3	213,30	**220**	344,40	**220**				
M24	3,00	160	18,0	14,5	21,0	34	3	173,50	**240**	293,80	**240**				
M27	3,00	160	20,0	16,0	24,0	36	3	241,80	**270**						
M30	3,50	180	22,0	18,0	26,5	40	4	284,30	**300**						

P	**12**	**15**	**12**	**12**
M	**7**	**9**	**7**	**7**
K	**12**	**18**	**12**	**12**
N		**12**		
S				
H				
O				

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck

TruTap | M

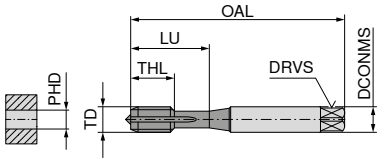

DIN 371 with reinforced shank

	UNI NCW	UNI CNC	UNI CNC	UNI CNC
	B 4–5	B 4–5	B 4–5	B 4–5
	ISO 2 6H	ISO 2X 6HX	ISO 3X 6GX	7GX
	TiN	TiN GS	TiN GS	TiN GS
	HSS-PM FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
	22 148 ...	**22 542 ...**	**22 596 ...**	**22 592 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
M3	0,50	56	3,5	2,7	2,5	6	18	3			48,92	**030**				
M3	0,50	70	6,0	4,9	2,5	6	18	3	64,48	**030**						
M4	0,70	63	4,5	3,4	3,3	7	21	3			51,91	**040**	62,59	**040**	62,59	**040**
M4	0,70	70	6,0	4,9	3,3	7	21	3	67,08	**040**						
M5	0,80	70	6,0	4,9	4,2	8	25	3	67,77	**050**	52,59	**050**	64,48	**050**	64,48	**050**
M6	1,00	80	6,0	4,9	5,0	10	30	3	85,25	**060**	66,81	**060**	70,63	**060**	78,82	**060**
M8	1,25	90	8,0	6,2	6,8	14	35	3	95,22	**080**						
M8	1,25	90	8,0	6,2	6,8	14	35	4			73,78	**080**	76,38	**080**	86,09	**080**
M10	1,50	100	10,0	8,0	8,5	16	39	3	117,00	**100**						
M10	1,50	100	10,0	8,0	8,5	16	39	4			91,83	**100**	95,22	**100**	103,40	**100**
M12	1,75	110	10,0	8,0	10,2	18	41	3	142,10	**120**						
M16	2,00	110	12,0	9,0	14,0	22	44	3	198,20	**160**						

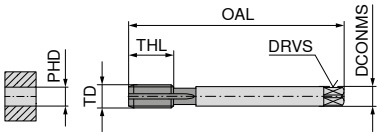

DIN 376 with reduced shank

									22 543 ...		**22 593 ...**	
									EUR U0		EUR U0	
M12	1,75	110	9	7	10,2	18	4		106,90	**120**	125,30	**120**
M14	2,00	110	11	9	12,0	20	4		300,70	**140**		
M16	2,00	110	12	9	14,0	22	4		153,10	**160**		
M20	2,50	140	16	12	17,5	25	4		259,50	**200**		

P	**15**	**15**	**15**	**15**
M	**8**	**9**	**9**	**9**
K	**15**	**18**	**18**	**18**
N	**22**	**12**	**12**	**12**
S				
H				
O				

Cutting speed v_c (m/min.)

Through hole – Machine taps

▲ LH = for left hand threads

TruTap | M

ST | ST LH

B 4–5

ISO 2 6H | ISO 2 6H

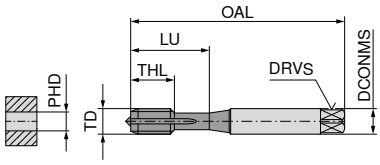

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 4xD

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 020 ... EUR U0		22 127 ... EUR U0	
M2	0,40	45	2,8	2,1	1,60	7	12	2	36,89	**020**		
M2,3	0,40	45	2,8	2,1	1,90	7	12	2	40,56	**023**		
M2,5	0,45	50	2,8	2,1	2,05	9	14	2	36,89	**025**		
M2,6	0,45	50	2,8	2,1	2,15	9	14	2	40,56	**026**		
M3	0,50	56	3,5	2,7	2,50	11	18	3	29,93	**030**	47,67	**030**
M3,5	0,60	56	4,0	3,0	2,90	12	20	3	31,95	**035**		
M4	0,70	63	4,5	3,4	3,30	13	21	3	30,33	**040**	49,73	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	3	31,95	**050**	51,24	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3	31,95	**060**	51,24	**060**
M8	1,25	90	8,0	6,2	6,80	20	35	3	38,39	**080**	57,66	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3	46,04	**100**	73,37	**100**

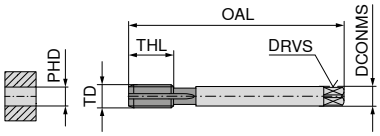

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 021 ... EUR U0		22 147 ... EUR U0	
M5	0,80	70	3,5	2,7	4,2	15	3	37,85	**050**		
M6	1,00	80	4,5	3,4	5,0	17	3	38,81	**060**		
M8	1,25	90	6,0	4,9	6,8	20	3	41,25	**080**		
M10	1,50	100	7,0	5,5	8,5	22	3	46,98	**100**		
M12	1,75	110	9,0	7,0	10,2	24	3	57,10	**120**	87,72	**120**
M14	2,00	110	11,0	9,0	12,0	26	3	77,62	**140**		
M16	2,00	110	12,0	9,0	14,0	27	3	81,17	**160**	133,80	**160**
M18	2,50	125	14,0	11,0	15,5	30	3	119,40	**180**		
M20	2,50	140	16,0	12,0	17,5	32	3	121,00	**200**	196,80	**200**
P									**12**		**12**
M											
K									**12**		**12**
N									**12**		**22**
S											
H											
O											

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

▲ TS = for high-speed machining, up to 100 m/min.

TruTap | M

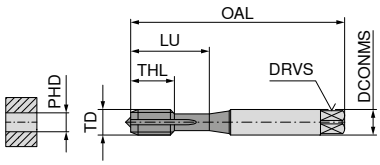

DIN 371 with reinforced shank

	ST TS	HR	VG
	B 4–5	B 4–5	B 4–5
	ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX
	TiN	AlTiNHD	TiN
	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-PM FHA 0° ≤ 1400 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 092 ... EUR U0		22 468 ... EUR U0		22 120 ... EUR U0	
M2	0,40	45	2,8	2,1	1,60	7	12	2			94,26	**02000**		
M2	0,40	45	2,8	2,1	1,60	4	12	2	63,40	**020**			55,46	**020**
M2,5	0,45	50	2,8	2,1	2,05	9	14	2			94,26	**02500**		
M2,5	0,45	50	2,8	2,1	2,05	5	15	2	63,40	**025**			55,46	**025**
M3	0,50	56	3,5	2,7	2,50	11	18	2			61,29	**03000**		
M3	0,50	56	3,5	2,7	2,50	6	18	3	49,73	**030**			40,86	**030**
M4	0,70	63	4,5	3,4	3,30	13	21	2			63,96	**04000**		
M4	0,70	63	4,5	3,4	3,30	7	21	3	54,24	**040**			43,87	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	2			66,00	**05000**		
M5	0,80	70	6,0	4,9	4,20	8	25	3	59,29	**050**			46,73	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3			74,78	**06000**		
M6	1,00	80	6,0	4,9	5,00	10	30	3	72,14	**060**			56,84	**060**
M8	1,25	90	8,0	6,2	6,80	20	35	3			82,16	**08000**		
M8	1,25	90	8,0	6,2	6,80	14	35	4	91,00	**080**			60,12	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3			115,70	**10000**		
M10	1,50	100	10,0	8,0	8,50	16	39	4	98,66	**100**			86,09	**100**

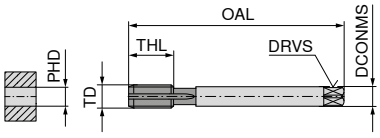

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 093 ... EUR U0		22 121 ... EUR U0	
M12	1,75	110	9	7	10,2	18	4	132,70	**120**	101,90	**120**
M16	2,00	110	12	9	14,0	22	4	172,10	**160**	142,10	**160**
M20	2,50	140	16	12	17,5	25	4	257,00	**200**	239,10	**200**

P	**65**	**8**	**10**
M		**8**	**8**
K	**65**		
N	**75**	**10**	**22**
S		**4**	
H			
O			

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

TruTap | M

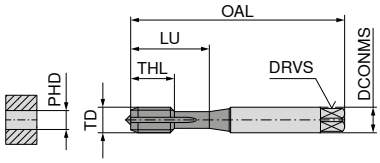

DIN 371 with reinforced shank

VA	VA
B 4–5	B 4–5
ISO 2 6H	ISO 2 6H
nitr.	TiN GS

HSS-E
FHA 0°
≤ 900 N/mm²
≤ 4xD

HSS-E
FHA 0°
≤ 900 N/mm²
≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 056 ... EUR U0		22 038 ... EUR U0	
M1,6	0,35	40	2,5	2,1	1,25	6	11	2			73,37	**016**
M2	0,40	45	2,8	2,1	1,60	7	12	2	41,80	**020**	60,12	**020**
M2,5	0,45	50	2,8	2,1	2,05	9	14	2	41,25	**025**	58,34	**025**
M3	0,50	56	3,5	2,7	2,50	11	18	3	33,50	**030**	50,01	**030**
M3,5	0,60	56	4,0	3,0	2,90	12	20	3	37,56	**035**		
M4	0,70	63	4,5	3,4	3,30	13	21	3	35,12	**040**	52,59	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	3	36,35	**050**	54,24	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3	37,85	**060**	67,49	**060**
M8	1,25	90	8,0	6,2	6,80	20	35	3	42,11	**080**	74,74	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3	51,91	**100**	92,78	**100**

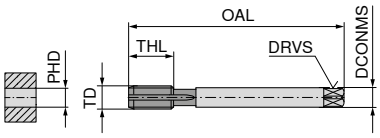

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 057 ... EUR U0		22 039 ... EUR U0	
M12	1,75	110	9	7	10,2	24	3	66,00	**120**	110,50	**120**
M14	2,00	110	11	9	12,0	26	3	91,00	**140**	158,50	**140**
M16	2,00	110	12	9	14,0	27	3	94,27	**160**	155,80	**160**
M18	2,50	125	14	11	15,5	30	3	181,60	**180**		
M20	2,50	140	16	12	17,5	32	3	135,40	**200**	262,40	**200**

P	**8**	**10**
M	**6**	**8**
K		
N		
S		
H		
O		

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

TruTap | M

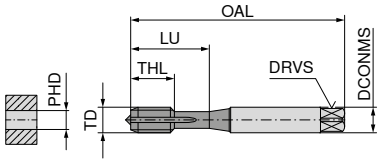

DIN 371 with reinforced shank

	Ti	Ti	Ti
	B 4–5	B 4–5	B 4–5
	ISO 1X 4HX	ISO 2X 6HX	ISO 2X 6HX
	TiN	vap.	TiN
	HSS-PM FHA 0° ≤ 44 HRC ≤ 4xD	HSS-PM FHA 0° ≤ 1400 N/mm² ≤ 4xD	HSS-PM FHA 0° ≤ 44 HRC ≤ 4xD
	22 081 ...	22 075 ...	22 077 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0	
M1,6	0,35	40	2,5	2,1	1,25	8	9,5	3			135,40	**016**		
M2	0,40	45	2,8	2,1	1,60	8	9,5	3	97,56	**020**	108,40	**020**		
M2,5	0,45	50	2,8	2,1	2,05	9	14,0	3			106,20	**025**		
M3	0,50	56	3,5	2,7	2,50	11	18,0	3	67,08	**030**	74,33	**030**	71,05	**030**
M3,5	0,60	56	4,0	3,0	2,90	12	20,0	3			84,99	**035**		
M4	0,70	63	4,5	3,4	3,30	13	21,0	3	69,02	**040**	78,02	**040**	73,78	**040**
M5	0,80	70	6,0	4,9	4,20	15	25,0	3	71,05	**050**	78,02	**050**	74,33	**050**
M6	1,00	80	6,0	4,9	5,00	17	30,0	3	79,24	**060**	80,21	**060**	76,10	**060**
M8	1,25	90	8,0	6,2	6,80	20	35,0	3	95,22	**080**	91,83	**080**	87,72	**080**
M10	1,50	100	10,0	8,0	8,50	22	39,0	3			106,90	**100**	105,30	**100**

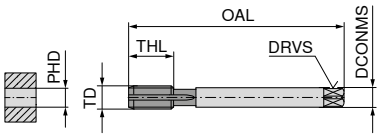

DIN 376 with reduced shank

									22 142 ...	
									EUR U0	
M12	1,75	110	9	7	10,2	24	3		115,30	**120**

P	**7**	**5**	**7**
M	**7**	**5**	**7**
K			
N			
S	**5**	**3**	**5**
H			
O			

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

TruTap DL | M

Ti | Ni

D 4–5 | D 4–5

ISO 2X 6HX | ISO 2X 6HX

TiCN | TiCN

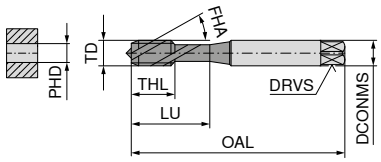

DIN 371 with reinforced shank

HSS-E
FHA 15°
≤ 1200 N/mm²
≤ 4xD

HSS-E
FHA 15°
≤ 1600 N/mm²
≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 159 ... EUR U0		22 297 ... EUR U0	
M3	0,50	56	3,5	2,7	2,5	11	18	2	59,43	**030**	71,05	**030**
M4	0,70	63	4,5	3,4	3,3	13	21	3	65,03	**040**	74,19	**040**
M5	0,80	70	6,0	4,9	4,2	15	25	3	65,44	**050**	75,98	**050**
M6	1,00	80	6,0	4,9	5,0	17	30	3	87,44	**060**	96,08	**060**
M8	1,25	90	8,0	6,2	6,8	20	35	3	96,08	**080**	106,60	**080**
M10	1,50	100	10,0	8,0	8,5	22	39	3	118,20	**100**	133,40	**100**



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 160 ... EUR U0		22 298 ... EUR U0	
M12	1,75	110	9	7	10,2	24	3	136,50	**120**	154,50	**120**
M16	2,00	110	12	9	14,0	27	3	192,80	**160**	215,80	**160**

P	**7**	
M	**7**	
K		
N	**22**	**22**
S	**5**	**2**
H		
O		

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

▲ EL = extra long, with double overall length

TruTap | M

UNI EL | B | 4–5 | ISO 2 6H | nitr. + vap.

ST EL | B | 4–5 | ISO 2 6H

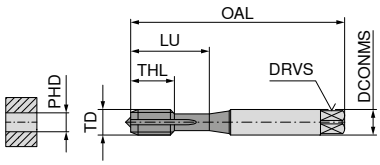

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

HSS-E
FHA 0°
≤ 950 N/mm²
≤ 4xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 514 ... EUR U0		22 233 ... EUR U0	
M3	0,50	100	3,5	2,7	2,5	11	18	3	79,24	**030**	77,33	**030**
M4	0,70	125	4,5	3,4	3,3	13	21	3	79,24	**040**	74,19	**040**
M5	0,80	140	6,0	4,9	4,2	15	25	3	87,72	**050**	81,04	**050**
M6	1,00	160	6,0	4,9	5,0	17	30	3	96,75	**060**	84,58	**060**
M8	1,25	180	8,0	6,2	6,8	20	35	3	103,40	**080**	100,80	**080**

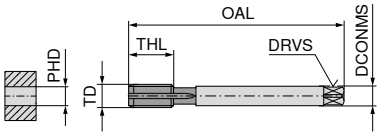

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 515 ... EUR U0		22 234 ... EUR U0	
M6	1,00	160	4,5	3,4	5,0	17	3	80,61	**060**	84,58	**060**
M8	1,25	180	6,0	4,9	6,8	20	3	99,62	**080**	100,80	**080**
M10	1,50	200	7,0	5,5	8,5	22	3	109,30	**100**	112,30	**100**
M12	1,75	224	9,0	7,0	10,2	24	3	135,40	**120**	135,40	**120**
M14	2,00	224	11,0	9,0	12,0	26	3	205,00	**140**	218,60	**140**
M16	2,00	224	12,0	9,0	14,0	27	3	262,40	**160**	210,40	**160**
M18	2,50	250	14,0	11,0	15,5	30	3	312,90	**180**	317,10	**180**
M20	2,50	280	16,0	12,0	17,5	32	3	274,60	**200**	285,60	**200**

P	**12**	**12**
M	**7**	
K	**12**	**12**
N		**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

▲ MMB = Nut taps

M

ST
MMB

≈ 20

ISO 2
6H

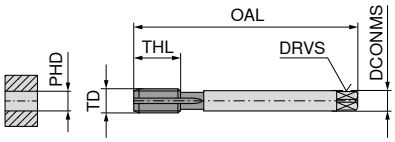

DIN 357 with reduced shank

HSS-E
FHA 0°
≤ 850 N/mm²
≤ 1xD

22 098 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
M3	0,50	70	2,2		2,5	16	3	58,34	**030**
M4	0,70	90	2,8	2,1	3,3	22	3	58,34	**040**
M5	0,80	100	3,5	2,7	4,2	24	3	61,07	**050**
M6	1,00	110	4,5	3,4	5,0	30	3	61,07	**060**
M8	1,25	125	6,0	4,9	6,8	38	3	75,43	**080**
M10	1,50	140	7,0	5,5	8,5	45	3	86,09	**100**
M12	1,75	180	9,0	7,0	10,2	50	3	115,30	**120**
M16	2,00	200	12,0	9,0	14,0	63	3	164,00	**160**

P	**15**
M	
K	
N	
S	
H	
O	

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

M

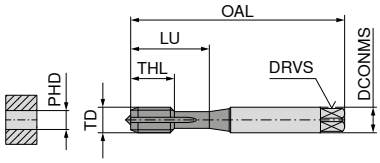

DIN 371 with reinforced shank

	UNI	UNI	UNI
	B 4–5	B 4–5	B 4–5
	ISO 2 6H	ISO 2 6H	ISO 2 6H
	nitr. + vap.	TiN	TiN
	HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-PM FHA 0° ≤ 1000 N/mm² ≤ 3xD
	23 110 ...	**23 112 ...**	**23 010 ...**
	EUR T9	EUR T9	EUR T9

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes						
M2	0,40	45	2,8	2,1	1,60	4	13,5	2					12,56	**020**
M2	0,40	45	2,8	2,1	1,60	7	12,0	2	15,40	**020**	18,12	**020**		
M2,5	0,45	50	2,8	2,1	2,05	9	14,0	2	15,14	**025**	20,20	**025**		
M3	0,50	56	3,5	2,7	2,50	11	18,0	3	10,27	**030**	13,07	**030**	15,66	**030**
M4	0,70	63	4,5	3,4	3,30	13	21,0	3	10,46	**040**	14,25	**040**	14,36	**040**
M5	0,80	70	6,0	4,9	4,20	15	25,0	3	10,46	**050**	14,36	**050**	16,07	**050**
M6	1,00	80	6,0	4,9	5,00	17	30,0	3	10,67	**060**	18,26	**060**	19,17	**060**
M8	1,25	90	8,0	6,2	6,80	20	35,0	3	12,36	**080**	19,79	**080**	21,37	**080**
M10	1,50	100	10,0	8,0	8,50	22	39,0	3	14,75	**100**	24,47	**100**	28,21	**100**

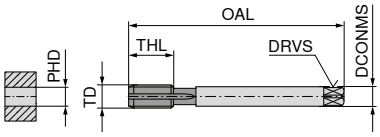

DIN 376 with reduced shank

									23 111 ...		**23 113 ...**		**23 021 ...**	
									EUR T9		EUR T9		EUR T9	
TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes							
M3	0,50	56	2,2		2,5	11	3		11,11	**030**				
M4	0,70	63	2,8	2,1	3,3	13	3		10,94	**040**				
M5	0,80	70	3,5	2,7	4,2	15	3		10,94	**050**				
M6	1,00	80	4,5	3,4	5,0	17	3		11,50	**060**				
M8	1,25	90	6,0	4,9	6,8	20	3		13,48	**080**				
M10	1,50	100	7,0	5,5	8,5	22	3		15,53	**100**				
M12	1,75	110	9,0	7,0	10,2	24	3		18,64	**120**	29,01	**120**	33,65	**120**
M14	2,00	110	11,0	9,0	12,0	20	4						51,02	**140**
M14	2,00	110	11,0	9,0	12,0	26	3		26,93	**140**	50,46	**14000**		
M16	2,00	110	12,0	9,0	14,0	27	3		27,57	**160**	41,03	**160**	47,40	**160**
M18	2,50	125	14,0	11,0	15,5	25	4						82,98	**180**
M18	2,50	125	14,0	11,0	15,5	30	3				80,07	**18000**		
M20	2,50	140	16,0	12,0	17,5	32	3		43,89	**200**	70,56	**200**	85,71	**200**
M22	2,50	140	18,0	14,5	19,5	32	3				118,60	**22000**		
M24	3,00	160	18,0	14,5	21,0	34	3				106,30	**240**		
M27	3,00	160	20,0	16,0	24,0	36	3				148,30	**27000**		
M30	3,50	180	22,0	18,0	26,5	40	4				166,40	**30000**		
M33	3,50	180	25,0	20,0	29,5	40	4				218,20	**33000**		
M36	4,00	200	28,0	22,0	32,0	50	4				267,30	**36000**		

P	**12**	**15**	**15**
M	**7**	**9**	**9**
K	**12**	**18**	**18**
N		**12**	**12**
S			
H			
O			

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck

▲ NC = for synchronised CNC machining with minimum length compensation chuck

M

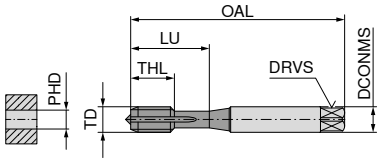

DIN 371 with reinforced shank

UNI NC	UNI NCW	FE	FE-HF
B 4–5	B 4–5	B 4–5	B 4–5
ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
TiN GS	TiCN		TiCN

HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD | HSS-PM FHA 0° ≤ 1000 N/mm² ≤ 3xD | HSS-E FHA 0° ≤ 850 N/mm² ≤ 3xD | HSS-E FHA 0° ≤ 1100 N/mm² ≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 114 ... EUR T9		23 116 ... EUR T9		23 212 ... EUR T9		23 310 ... EUR T9	
M1,6	0,35	40	2,5	2,1	1,25	6	11	2					31,98	**016**		
M2	0,40	45	2,8	2,1	1,60	7	12	2					21,63	**020**		
M2,5	0,45	50	2,8	2,1	2,05	9	14	2					18,12	**025**		
M3	0,50	56	3,5	2,7	2,50	11	18	3	22,13	**030**			14,36	**030**	20,98	**030**
M3	0,50	70	6,0	4,9	2,50	6	18	3			26,54	**030**				
M3,5	0,60	56	4,0	3,0	2,90	12	20	3					16,19	**035**		
M4	0,70	63	4,5	3,4	3,30	13	21	3	24,08	**040**			14,36	**040**	22,26	**040**
M4	0,70	70	6,0	4,9	3,30	7	21	3			30,30	**040**				
M5	0,80	70	6,0	4,9	4,20	8	25	3			30,81	**050**				
M5	0,80	70	6,0	4,9	4,20	15	25	3	24,22	**050**			14,90	**050**	22,52	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	3			30,81	**060**				
M6	1,00	80	6,0	4,9	5,00	17	30	3	35,48	**060**			14,90	**060**	30,81	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	3			38,97	**080**				
M8	1,25	90	8,0	6,2	6,80	20	35	3	37,54	**080**			19,29	**080**	33,27	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	3			46,98	**100**				
M10	1,50	100	10,0	8,0	8,50	22	39	3	47,25	**100**			23,04	**100**	41,80	**100**

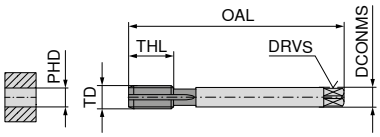

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 115 ... EUR T9		23 117 ... EUR T9		23 213 ... EUR T9		23 311 ... EUR T9	
M12	1,75	110	9	7	10,2	24	3	54,50	**120**			31,08	**120**	48,42	**120**
M12	1,75	110	10	8	10,2	18	3			58,77	**120**				
M14	2,00	110	11	9	12,0	26	3					37,42	**140**		
M16	2,00	110	12	9	14,0	22	3			79,09	**160**				
M16	2,00	110	12	9	14,0	27	3	73,91	**160**			47,13	**160**	67,19	**160**
M20	2,50	140	16	12	17,5	32	3	134,70	**200**			73,66	**200**	118,70	**200**

P	**15**	**15**	**12**	**15**
M	**9**	**8**		
K	**18**	**15**	**12**	**15**
N	**12**	**22**	**12**	**15**
S				
H				
O				

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

M

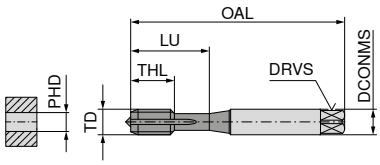

DIN 371 with reinforced shank

	VA	VA	VA	AL	AL
	B 4–5	B 4–5	B 4–5	B 4–5	B 4–5
	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	TiN	nitr.	nitr.		CrN
	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-PM FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 500 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 500 N/mm² ≤ 3xD
	23 412 ...	**23 450 ...**	**23 410 ...**	**23 610 ...**	**23 612 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9		EUR T9		EUR T9		EUR T9		EUR T9	
M2	0,40	45	2,8	2,1	1,60	7	12	2	29,27	**020**			15,93	**020**				
M2,5	0,45	50	2,8	2,1	2,05	9	14	2	24,60	**025**			18,38	**025**				
M3	0,50	56	3,5	2,7	2,50	11	18	3	19,43	**030**	14,62	**030**	10,46	**030**	14,36	**030**	16,32	**030**
M4	0,70	63	4,5	3,4	3,30	13	21	3	21,63	**040**	14,75	**040**	10,46	**040**	14,36	**040**	16,83	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	3	22,13	**050**	15,93	**050**	10,90	**050**	14,90	**050**	17,33	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3	29,01	**060**	16,19	**060**	10,90	**060**	14,90	**060**	17,33	**060**
M8	1,25	90	8,0	6,2	6,80	20	35	3	30,94	**080**	18,12	**080**	14,00	**080**	19,29	**080**	19,79	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3	42,60	**100**	20,58	**100**	16,96	**100**	23,04	**100**	24,35	**100**

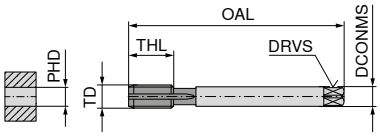

DIN 376 with reduced shank

	23 413 ...	**23 451 ...**	**23 411 ...**
	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-PM FHA 0° ≤ 1200 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9		EUR T9		EUR T9	
M12	1,75	110	9	7,0	10,2	24	3	46,98	**120**	36,62	**120**	22,52	**120**
M14	2,00	110	11	9,0	12,0	26	3			48,55	**140**		
M16	2,00	110	12	9,0	14,0	27	3	58,65	**160**	51,40	**160**	34,70	**160**
M20	2,50	140	16	12,0	17,5	32	3	102,50	**200**	76,79	**200**	53,08	**200**
M24	3,00	160	18	14,5	21,0	34	3					70,16	**240**

P	**10**	**8**	**8**		
M	**8**	**6**	**6**		
K					
N	**24**	**22**	**22**	**15**	**20**
S					
H					
O					

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | M

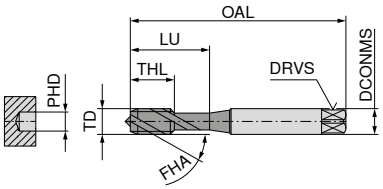

DIN 371 with reinforced shank

UNI	UNI	UNI
C 2–3	C 2–3	C 2–3
ISO 2 6H	ISO 2 6H	ISO 2 6H
vap.	TiN	TiCN

HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	22 518 ... EUR U0		22 520 ... EUR U0		22 522 ... EUR U0	
mm	mm	mm	mm	mm	mm	mm	mm							
M2	0,40	45	2,8	2,1	1,60	4	12	2	43,60	**020**	62,59	**020**		
M2,5	0,45	50	2,8	2,1	2,05	5	15	2	41,80	**025**				
M3	0,50	56	3,5	2,7	2,50	6	18	3	37,17	**030**	46,98	**030**	46,98	**030**
M4	0,70	63	4,5	3,4	3,30	7	21	3	39,22	**040**	50,28	**040**	50,28	**040**
M5	0,80	70	6,0	4,9	4,20	8	25	3	39,63	**050**	50,68	**050**	50,68	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	3	40,86	**060**	59,71	**060**	59,71	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	3	48,09	**080**	65,86	**080**	66,40	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	3	57,66	**100**	78,42	**100**	78,42	**100**



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	22 519 ... EUR U0		22 521 ... EUR U0	
mm	mm	mm	mm	mm	mm	mm					
M12	1,75	110	9	7,0	10,2	18	3	67,63	**120**	94,54	**120**
M14	2,00	110	11	9,0	12,0	20	3	90,85	**140**	151,60	**140**
M16	2,00	110	12	9,0	14,0	22	3	96,75	**160**	136,70	**160**
M18	2,50	125	14	11,0	15,5	25	3	147,60	**180**	237,70	**180**
M20	2,50	140	16	12,0	17,5	25	3	147,60	**200**	233,70	**200**
M22	2,50	140	18	14,5	19,5	27	4	205,00	**220**	344,40	**220**
M24	3,00	160	18	14,5	21,0	30	4	184,50	**240**	300,70	**240**
M30	3,50	180	22	18,0	26,5	35	4	312,90	**300**		
M33	3,50	180	25	20,0	29,5	35	4	599,80	**330**		
M36	4,00	200	28	22,0	32,0	40	4	497,30	**360**		

P	**12**	**15**	**15**
M	**7**	**9**	**9**
K	**12**	**18**	**18**
N		**12**	**12**
S			
H			
O			

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck

CavTap | M

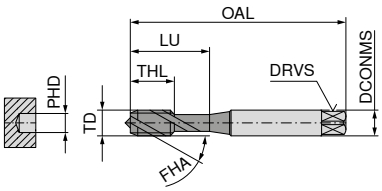

DIN 371 with reinforced shank

	UNI NCW	UNI	UNI	UNI
	C 2–3	E 1,5–2	E 1,5–2	E 1,5–2
	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	TiN	vap.	vap.	TiN
	HSS-PM FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD
	22 149 ...	22 524 ...	22 534 ...	22 526 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
M3	0,50	56	3,5	2,7	2,5	6	18	3			38,81	**030**			43,87	**030**
M3	0,50	70	6,0	4,9	2,5	6	18	3	66,00	**030**						
M4	0,70	63	4,5	3,4	3,3	7	21	3			38,81	**040**			47,96	**040**
M4	0,70	70	6,0	4,9	3,3	7	21	3	72,14	**040**						
M5	0,80	70	6,0	4,9	4,2	8	25	3	74,74	**050**	40,56	**050**	61,07	**050**	48,92	**050**
M6	1,00	80	6,0	4,9	5,0	10	30	3	91,83	**060**	40,56	**060**	61,07	**060**	57,95	**060**
M8	1,25	90	8,0	6,2	6,8	14	35	3	102,60	**080**	46,33	**080**	67,77	**080**	63,40	**080**
M10	1,50	100	10,0	8,0	8,5	16	39	3	126,30	**100**	56,43	**100**	81,55	**100**	76,10	**100**



DIN 376 with reduced shank

								22 149 ...		22 525 ...		22 535 ...		22 527 ...	
TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
M12	1,75	110	9	7,0	10,2	18	4			71,75	**120**	92,78	**120**	91,83	**120**
M12	1,75	110	10	8,0	10,2	18	3	151,60	**120**						
M14	2,00	110	11	9,0	12,0	20	4			117,00	**140**	135,40	**140**		
M16	2,00	110	12	9,0	14,0	22	3	203,50	**160**						
M16	2,00	110	12	9,0	14,0	22	4			100,30	**160**	133,80	**160**	132,10	**160**
M18	2,50	125	14	11,0	15,5	25	4			183,30	**180**				
M20	2,50	140	16	12,0	17,5	25	4			155,80	**200**	199,50	**200**	224,10	**200**
M22	2,50	140	18	14,5	19,5	27	5			250,10	**220**				
M24	3,00	160	18	14,5	21,0	30	5			218,60	**240**				

P	**15**	**12**	**12**	**15**
M	**8**	**7**	**7**	**9**
K	**15**	**12**	**12**	**18**
N	**22**			**12**
S				
H				
O				

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

CavTap | M

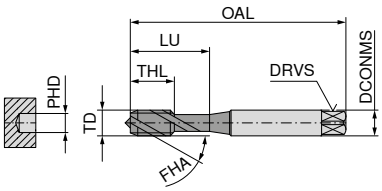

DIN 371 with reinforced shank

	UNI CNC	UNI CNC	UNI CNC	UNI CNC
	C 2–3	C 2–3	E 1,5–2	C 2–3
	ISO 2X 6HX	ISO 2 6H	ISO 2 6H	7G
	TiN	TiN GS	TiN GS	TiN GS

HSS-E FHA 50° ≤ 1100 N/mm² ≤ 3xD | HSS-E FHA 45° ≤ 1100 N/mm² ≤ 3xD | HSS-E FHA 45° ≤ 1100 N/mm² ≤ 3xD | HSS-E FHA 45° ≤ 1100 N/mm² ≤ 3xD

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	22 416 ...		22 544 ...		22 546 ...		22 594 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR U0		EUR U0		EUR U0		EUR U0	
M3	0,50	56	3,5	2,7	2,5	6	18	3	63,79	030	56,43	030			64,90	030
M4	0,70	63	4,5	3,4	3,3	7	21	3	66,81	040	57,66	040			65,59	040
M5	0,80	70	6,0	4,9	4,2	8	25	3	68,60	050	59,71	050	85,25	050	67,49	050
M6	1,00	80	6,0	4,9	5,0	10	30	3	82,93	060	61,76	060	86,09	060	73,78	060
M8	1,25	90	8,0	6,2	6,8	14	35	3	92,23	080	77,20	080	110,50	080	91,00	080
M10	1,50	100	10,0	8,0	8,5	16	39	3	114,20	100	87,72	100	127,10	100	101,00	100



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	22 417 ...		22 545 ...			22 595 ...	
mm	mm	mm	mm	mm	mm	mm		EUR U0		EUR U0			EUR U0	
M12	1,75	110	9	7	10,2	18	3	134,60	120					
M12	1,75	110	9	7	10,2	18	4			119,40	120		135,40	120
M14	2,00	110	11	9	12,0	20	3	192,80	140					
M14	2,00	110	11	9	12,0	20	4			146,20	140		161,20	140
M16	2,00	110	12	9	14,0	22	3	187,30	160					
M16	2,00	110	12	9	14,0	22	4			159,90	160		174,90	160
M20	2,50	140	16	12	17,5	25	3	321,20	200					
M20	2,50	140	16	12	17,5	25	4			232,20	200		255,60	200

P	15	15	15	15
M	9	9	9	9
K	18	18	18	18
N	22	12	12	12
S				
H				
O				

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

CavTap SL | M

ST CNC | HR | ST CNC

C 2–3

ISO 2X 6HX | ISO 2 6H | ISO 2X 6HX

TiN | AlTiNHD | TiN

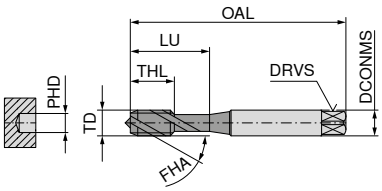

DIN 371 with reinforced shank

HSS-E
FHA 15°
≤ 1100 N/mm²
≤ 2xD

HSS-PM
FHA 25°
≤ 1400 N/mm²
≤ 2xD

HSS-E
FHA 15°
≤ 1100 N/mm²
≤ 2xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 328 ... EUR U0		22 469 ... EUR U0		22 443 ... EUR U0	
M3	0,50	56	3,5	2,7	2,5	6	18	2	54,78	030				
M3	0,50	56	3,5	2,7	2,5	11	18	3			48,68	03000		
M4	0,70	63	4,5	3,4	3,3	7	21	3	57,10	040				
M4	0,70	63	4,5	3,4	3,3	13	21	3			57,62	04000		
M5	0,80	70	6,0	4,9	4,2	8	25	3	59,43	050			87,44	050
M5	0,80	70	6,0	4,9	4,2	15	25	3			58,94	05000		
M6	1,00	80	6,0	4,9	5,0	10	30	3	73,37	060			101,80	060
M6	1,00	80	6,0	4,9	5,0	17	30	3			61,02	06000		
M8	1,25	90	8,0	6,2	6,8	14	35	3	82,93	080			111,50	080
M8	1,25	90	8,0	6,2	6,8	20	35	3			66,58	08000		
M10	1,50	100	10,0	8,0	8,5	16	39	3	101,80	100			135,40	100
M10	1,50	100	10,0	8,0	8,5	22	39	3			81,60	10000		
M12	1,75	110	12,0	9,0	10,2	24	44	3			97,41	12000		



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 329 ... EUR U0	
M12	1,75	110	9	7	10,2	18	3	119,10	120
M16	2,00	110	12	9	14,0	22	3	172,10	160
M20	2,50	140	16	12	17,5	25	3	285,60	200

P	12	8	12
M	8	8	8
K	20		20
N	22	10	22
S		4	
H			
O			

Cutting speed v_c (m/min.)

Blind hole – Machine taps

CavTap | M

ST | C 2–3 | ISO 2 6H

ST | C 2–3 | ISO 2 6H | TiN

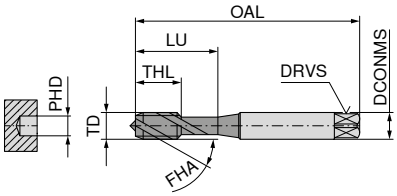

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 082 ... EUR U0		22 084 ... EUR U0	
M2	0,40	45	2,8	2,1	1,60	4	12	2	40,56	**020**	52,20	**020**
M2,5	0,45	50	2,8	2,1	2,05	5	15	2	39,34	**025**		
M3	0,50	56	3,5	2,7	2,50	6	18	3	34,30	**030**	42,62	**030**
M4	0,70	63	4,5	3,4	3,30	7	21	3	34,17	**040**	43,60	**040**
M5	0,80	70	6,0	4,9	4,20	8	25	3	34,71	**050**	43,87	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	3	35,52	**060**	55,06	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	3	42,62	**080**	61,76	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	3	50,28	**100**	83,36	**100**

P	**12**	**15**
M		
K	**12**	**15**
N	**12**	**15**
S		
H		
O		

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

CavTap | M

HR | C 2–3 | ISO 2 6H

HR | C 2–3 | ISO 2 6H | OSM

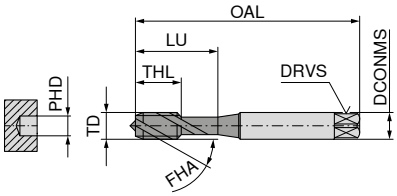

DIN 371 with reinforced shank

HSS-PM
FHA 42°
≤ 1400 N/mm²
≤ 3xD

HSS-PM
FHA 42°
≤ 1400 N/mm²
≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 498 ... EUR U0		22 499 ... EUR U0	
M3	0,50	56	3,5	2,7	2,5	6	18	3	40,16	**030**	50,98	**030**
M4	0,70	63	4,5	3,4	3,3	7	21	3	37,85	**040**	50,98	**040**
M5	0,80	70	6,0	4,9	4,2	8	25	3	39,90	**050**	54,24	**050**
M6	1,00	80	6,0	4,9	5,0	10	30	3	39,34	**060**	56,02	**060**
M8	1,25	90	8,0	6,2	6,8	14	35	3	47,67	**080**	71,05	**080**
M10	1,50	100	10,0	8,0	8,5	16	39	3	57,66	**100**	80,21	**100**

P	**6**	**8**
M	**6**	**8**
K		
N	**8**	**12**
S		
H		
O		

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | M

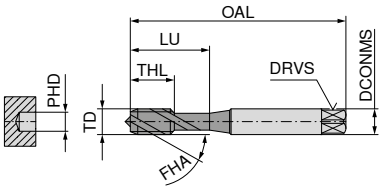

DIN 371 with reinforced shank

	VA	VA	VA
	C 2–3	E 1,5–2	C 2–3
	ISO 2 6H	ISO 2 6H	ISO 2 6H
	vap.	TiN GS	TiN GS
	HSS-E FHA 42° ≤ 900 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 900 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 900 N/mm² ≤ 3xD

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	22 090 ... EUR U0		22 042 ... EUR U0		22 040 ... EUR U0	
mm	mm	mm	mm	mm	mm	mm	mm							
M1,6	0,35	40	2,5	2,1	1,25	4	11	2					104,50	**016**
M2	0,40	45	2,8	2,1	1,60	4	12	2	65,59	**020**			58,91	**020**
M2,5	0,45	50	2,8	2,1	2,05	5	15	2	51,91	**025**				
M2,5	0,45	50	2,8	2,1	2,05	5	15	3					56,02	**025**
M3	0,50	56	3,5	2,7	2,50	6	18	3	38,81	**030**			57,66	**030**
M4	0,70	63	4,5	3,4	3,30	7	21	3	39,90	**040**			58,34	**040**
M5	0,80	70	6,0	4,9	4,20	8	25	3	40,56	**050**	86,09	**050**	61,07	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	3	40,86	**060**	87,05	**060**	62,59	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	3	47,67	**080**	111,20	**080**	78,42	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	3	57,66	**100**	127,90	**100**	91,00	**100**



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	22 091 ... EUR U0		22 041 ... EUR U0	
mm	mm	mm	mm	mm	mm	mm					
M12	1,75	110	9	7,0	10,2	18	4	71,75	**120**	122,20	**120**
M14	2,00	110	11	9,0	12,0	20	4	105,30	**140**	147,60	**140**
M16	2,00	110	12	9,0	14,0	22	4	101,00	**160**	161,20	**160**
M20	2,50	140	16	12,0	17,5	25	4	155,80	**200**	235,10	**200**
M22	2,50	140	18	14,5	19,5	27	5	261,00	**220**		
M24	3,00	160	18	14,5	21,0	30	5	198,20	**240**		
M30	3,50	180	22	18,0	26,5	35	5	407,30	**300**		

P	**8**	**10**	**10**
M	**6**	**8**	**8**
K			
N			
S			
H			
O			

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

CavTap | M

Soft | C | 2–3 | ISO 2 6H

NW | C | 2–3 | ISO 2 6H | vap.

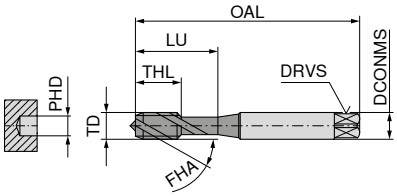

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 500 N/mm²
≤ 3xD

HSS-E
FHA 38°
≤ 500 N/mm²
≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 326 ... EUR U0		22 086 ... EUR U0	
M2	0,40	45	2,8	2,1	1,60	4	12	2	53,29	**020**	45,91	**020**
M2,5	0,45	50	2,8	2,1	2,05	5	15	2	49,86	**025**	42,62	**025**
M3	0,50	56	3,5	2,7	2,50	6	18	2	40,86	**030**		
M3	0,50	56	3,5	2,7	2,50	6	18	3			35,79	**030**
M4	0,70	63	4,5	3,4	3,30	7	21	2	40,86	**040**		
M4	0,70	63	4,5	3,4	3,30	7	21	3			35,79	**040**
M5	0,80	70	6,0	4,9	4,20	8	25	2	42,22	**050**		
M5	0,80	70	6,0	4,9	4,20	8	25	3			37,17	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	2	42,22	**060**		
M6	1,00	80	6,0	4,9	5,00	10	30	3			37,17	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	2	50,56	**080**		
M8	1,25	90	8,0	6,2	6,80	14	35	3			42,91	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	2	59,43	**100**		
M10	1,50	100	10,0	8,0	8,50	16	39	3			52,59	**100**
P										**15**		**15**
M												
K												
N										**22**		
S												
H												
O												

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap SL | M

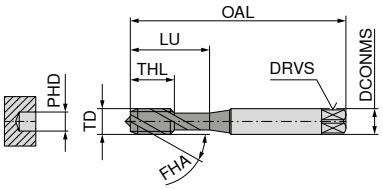

DIN 371 with reinforced shank

	Ti	Ti	Ni
	C 2–3	C 2–3	C 2–3
	ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX
	TiN	TiCN	TiCN
	HSS-PM FHA 30° ≤ 1400 N/mm² ≤ 1,5xD	HSS-PM FHA 15° ≤ 1200 N/mm² ≤ 2xD	HSS-PM FHA 15° ≤ 1600 N/mm² ≤ 2xD
	22 076 ...	22 163 ...	22 424 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0	
M3	0,50	56	3,5	2,7	2,5	11	18	2			58,07	030	74,19	030
M3	0,50	56	3,5	2,7	2,5	6	18	3	56,02	030				
M3,5	0,60	56	4,0	3,0	2,9	12	20	3			62,44	035		
M4	0,70	63	4,5	3,4	3,3	7	21	3	57,66	040				
M4	0,70	63	4,5	3,4	3,3	13	21	3			63,79	040	77,33	040
M5	0,80	70	6,0	4,9	4,2	8	25	3	57,95	050				
M5	0,80	70	6,0	4,9	4,2	15	25	3			64,48	050	80,21	050
M6	1,00	80	6,0	4,9	5,0	10	30	3	63,40	060				
M6	1,00	80	6,0	4,9	5,0	17	30	3			85,93	060	100,80	060
M8	1,25	90	8,0	6,2	6,8	14	35	3	66,81	080				
M8	1,25	90	8,0	6,2	6,8	20	35	3			93,73	080	110,70	080
M10	1,50	100	10,0	8,0	8,5	16	39	3	96,75	100				
M10	1,50	100	10,0	8,0	8,5	22	39	3			115,30	100	138,00	100
M12	1,75	110	12,0	9,0	10,2	18	44	3	110,50	120				



DIN 376 with reduced shank

		22 164 ...	22 425 ...
		EUR U0	EUR U0

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0		EUR U0	
M12	1,75	110	9	7,0	10,2	24	3	130,60	120	161,20	120
M14	2,00	110	11	9,0	12,0	26	3			236,50	140
M16	2,00	110	12	9,0	14,0	27	3	183,30	160	221,40	160
M20	2,50	140	16	12,0	17,5	32	3	317,10	200	383,90	200
M24	3,00	160	18	14,5	21,0	34	3	362,00	240		

P	7	7	
M	7	7	
K			
N		22	22
S	5	5	2
H			
O			

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

▲ ES = extra short

CavTap | M

UNI ES | E 1,5–2 | ISO 2 6H | vap.

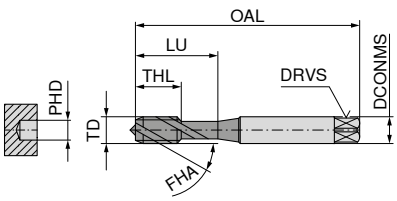

DIN 352 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 500 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
M3	0,50	40	3,5	2,7	2,5	6	18	3	32,52	**030**
M4	0,70	45	4,5	3,4	3,3	7	22	3	33,50	**040**
M5	0,80	50	6,0	4,9	4,2	9	25	3	34,30	**050**
M6	1,00	56	6,0	4,9	5,0	10	28	3	35,52	**060**
M8	1,25	63	6,0	4,9	6,8	14		3	40,86	**080**
M10	1,50	70	7,0	5,5	8,5	16		3	48,64	**100**
M12	1,75	75	9,0	7,0	10,2	18		4	63,40	**120**
M16	2,00	80	12,0	9,0	14,0	22		4	100,30	**160**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ ES = extra short

CavTap SL | M

ST
ES

C
2–3

ISO 2
6H

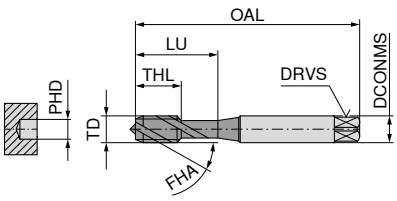

DIN 352 with reinforced shank

HSS-E
FHA 15°
≤ 750 N/mm²
≤ 2xD

22 016 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
M3	0,50	40	3,5	2,7	2,5	10	18	2	29,24	**030**
M4	0,70	45	4,5	3,4	3,3	12	22	3	29,38	**040**
M5	0,80	50	6,0	4,9	4,2	14	25	3	30,19	**050**
M6	1,00	56	6,0	4,9	5,0	16	28	3	31,14	**060**
M8	1,25	63	6,0	4,9	6,8	20		3	35,52	**080**
M10	1,50	70	7,0	5,5	8,5	22		3	45,10	**100**
M12	1,75	75	9,0	7,0	10,2	24		3	57,95	**120**

P	**12**
M	
K	**12**
N	**12**
S	
H	
O	

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

▲ EL = extra long, with double overall length

CavTap | M

ST EL | UNI EL

C 2–3 | C 2–3

ISO 2 6H | ISO 2 6H

vap.

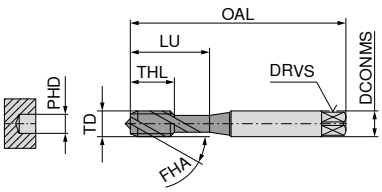

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 422 ... EUR U0		22 538 ... EUR U0	
M3	0,50	100	3,5	2,7	2,5	6	18	3	78,56	**030**	67,49	**030**
M4	0,70	125	4,5	3,4	3,3	7	21	3	76,92	**040**	67,49	**040**
M5	0,80	140	6,0	4,9	4,2	8	25	3	85,93	**050**	75,69	**050**
M6	1,00	160	6,0	4,9	5,0	10	30	3	89,49	**060**	79,66	**060**
M8	1,25	180	8,0	6,2	6,8	14	35	3	107,70	**080**	95,22	**080**



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 539 ... EUR U0	
M6	1,00	160	4,5	3,4	5,0	10	3	86,09	**060**
M8	1,25	180	6,0	4,9	6,8	14	3	104,50	**080**
M10	1,50	200	7,0	5,5	8,5	16	3	105,30	**100**
M12	1,75	224	9,0	7,0	10,2	18	3	134,60	**120**
M14	2,00	224	11,0	9,0	12,0	20	3	198,20	**140**
M16	2,00	224	12,0	9,0	14,0	22	3	189,90	**160**
M18	2,50	250	14,0	11,0	15,5	25	3	304,70	**180**
M20	2,50	280	16,0	12,0	17,5	25	3	261,00	**200**

P	**12**	**12**
M		**7**
K	**12**	**12**
N	**22**	
S		
H		
O		

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ EL = extra long, with double overall length

CavTap SL | M

ST
EL

E
1,5–2

ISO 2
6H

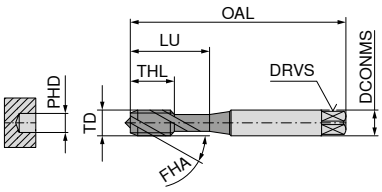

DIN 371 with reinforced shank

HSS-E
FHA 15°
≤ 750 N/mm²
≤ 2xD

22 078 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
M3	0,50	100	3,5	2,7	2,5	11	18	2	64,90	**030**
M4	0,70	125	4,5	3,4	3,3	13	21	3	64,48	**040**
M5	0,80	140	6,0	4,9	4,2	15	25	3	73,09	**050**
M6	1,00	160	6,0	4,9	5,0	17	30	3	76,10	**060**
M8	1,25	180	8,0	6,2	6,8	20	35	3	91,83	**080**



DIN 376 with reduced shank

22 080 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
M6	1,00	160	4,5	3,4	5,0	17	3	79,24	**060**
M8	1,25	180	6,0	4,9	6,8	20	3	94,27	**080**
M10	1,50	200	7,0	5,5	8,5	22	3	100,30	**100**
M12	1,75	224	9,0	7,0	10,2	24	3	127,90	**120**
M14	2,00	224	11,0	9,0	12,0	26	3	187,30	**140**
M16	2,00	224	12,0	9,0	14,0	27	3	184,50	**160**
M20	2,50	280	16,0	12,0	17,5	32	3	255,60	**200**

P	**12**
M	
K	**12**
N	**12**
S	
H	
O	

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

▲ NC = for synchronised CNC machining with minimum length compensation chuck

M

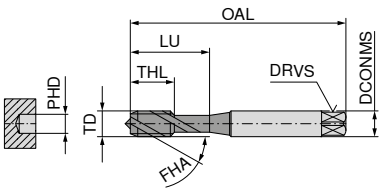

DIN 371 with reinforced shank

	UNI	UNI	UNI	UNI	UNI NC
	C 2–3	C 2–3	C 2–3	C 2–3	C 2–3
	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	vap.	TiN	TiN	TiCN	TiN GS
	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-PM FHA 50° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 45° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 1000 N/mm² ≤ 3xD

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	23 118 ... EUR T9		23 120 ... EUR T9		23 026 ... EUR T9		23 122 ... EUR T9		23 124 ... EUR T9	
mm	mm	mm	mm	mm	mm	mm	mm											
M2	0,40	45	2,8	2,1	1,60	4	12	2	16,07	**020**	14,00	**020**						
M2,5	0,45	50	2,8	2,1	2,05	5	14	2	15,79	**025**	21,11	**025**						
M3	0,50	56	3,5	2,7	2,50	6	18	3	10,85	**030**	16,07	**030**	17,86	**030**	23,44	**030**	24,72	**030**
M4	0,70	63	4,5	3,4	3,30	7	21	3	10,85	**040**	17,21	**040**	17,86	**040**	24,72	**040**	26,15	**040**
M5	0,80	70	6,0	4,9	4,20	8	25	3	11,39	**050**	17,49	**050**	19,17	**050**	25,76	**050**	27,57	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	3	11,78	**060**	21,76	**060**	22,26	**060**	33,27	**060**	37,29	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	3	13,85	**080**	23,44	**080**	26,42	**080**	35,73	**080**	40,01	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	3	15,93	**100**	30,03	**100**	33,27	**100**	45,17	**100**	50,87	**100**



DIN 376 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	23 119 ... EUR T9		23 121 ... EUR T9		23 027 ... EUR T9		23 123 ... EUR T9		23 125 ... EUR T9	
mm	mm	mm	mm	mm	mm	mm											
M3	0,50	56	2,2		2,5	6	3	12,94	**030**								
M4	0,70	63	2,8	2,1	3,3	7	3	11,67	**040**								
M5	0,80	70	3,5	2,7	4,2	8	3	11,50	**050**								
M6	1,00	80	4,5	3,4	5,0	10	3	11,31	**060**								
M8	1,25	90	6,0	4,9	6,8	14	3	11,84	**080**								
M10	1,50	100	7,0	5,5	8,5	16	3	16,07	**100**								
M12	1,75	110	9,0	7,0	10,2	18	3	18,12	**120**	35,99	**120**						
M12	1,75	110	9,0	7,0	10,2	18	4					39,23	**120**	53,60	**120**	59,04	**120**
M14	2,00	110	11,0	9,0	12,0	20	3			54,73	**14000**						
M14	2,00	110	11,0	9,0	12,0	20	4					56,57	**140**				
M16	2,00	110	12,0	9,0	14,0	22	3	26,67	**160**	50,11	**160**						
M16	2,00	110	12,0	9,0	14,0	22	4					56,57	**160**	71,47	**160**	78,72	**160**
M18	2,50	125	14,0	11,0	15,5	25	3			86,56	**18000**						
M20	2,50	140	16,0	12,0	17,5	25	3	40,13	**200**	74,19	**200**	64,72	**200**				
M20	2,50	140	16,0	12,0	17,5	25	4							129,40	**200**	143,70	**200**
M22	2,50	140	18,0	14,5	19,5	27	4			126,90	**22000**						
M24	3,00	160	18,0	14,5	21,0	34	4			104,60	**240**						
M27	3,00	160	20,0	16,0	24,0	30	4			158,70	**27000**						
M30	3,50	180	22,0	18,0	26,5	35	4			176,20	**30000**						
M33	3,50	180	25,0	20,0	29,5	35	4			254,10	**33000**						
M36	4,00	200	28,0	22,0	32,0	40	4			276,10	**36000**						

P	**12**	**15**	**15**	**15**	**15**
M	**7**	**9**	**9**	**9**	**9**
K	**12**	**18**	**18**	**18**	**18**
N		**12**	**12**	**12**	**12**
S					
H					
O					

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ NCW = with Weldon flat for synchronised CNC machining without length compensation chuck

M

UNI NCW | FE | FE-HF | VA

C 2–3

ISO 2 6H

TiCN (UNI NCW, FE-HF)

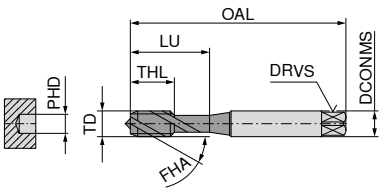

DIN 371 with reinforced shank

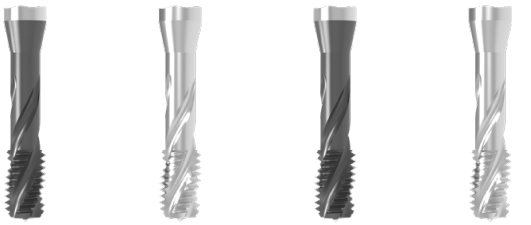

HSS-PM, FHA 35°, ≤ 1000 N/mm², ≤ 2,5xD — **23 126 ...**

HSS-E, FHA 35°, ≤ 850 N/mm², ≤ 2,5xD — **23 216 ...**

HSS-E, FHA 35°, ≤ 1100 N/mm², ≤ 2,5xD — **23 312 ...**

HSS-E, FHA 35°, ≤ 1200 N/mm², ≤ 2,5xD — **23 414 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 126 ... EUR T9		23 216 ... EUR T9		23 312 ... EUR T9		23 414 ... EUR T9	
M2	0,40	45	2,8	2,1	1,60	4	12	2			14,62	020			24,99	020
M2,5	0,45	50	2,8	2,1	2,05	5	14	2			26,81	025			29,65	025
M3	0,50	56	3,5	2,7	2,50	6	18	3			14,36	030	21,49	030	16,19	030
M3	0,50	70	6,0	4,9	2,50	6	18	3	26,54	030						
M4	0,70	63	4,5	3,4	3,30	7	21	3			14,36	040	23,44	040	16,19	040
M4	0,70	70	6,0	4,9	3,30	7	21	3	30,30	040						
M5	0,80	70	6,0	4,9	4,20	8	25	3	30,81	050	14,90	050	23,69	050	16,72	050
M6	1,00	80	6,0	4,9	5,00	10	30	3	30,81	060	14,90	060	32,77	060	16,72	060
M8	1,25	90	8,0	6,2	6,80	14	35	3	38,97	080	19,29	080	35,73	080	21,63	080
M10	1,50	100	10,0	8,0	8,50	16	39	3	46,98	100	23,04	100	44,54	100	26,30	100



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 127 ... EUR T9		23 217 ... EUR T9		23 313 ... EUR T9		23 415 ... EUR T9	
M12	1,75	110	10	8,0	10,2	18	3	58,77	120						
M12	1,75	110	9	7,0	10,2	18	3			31,08	120	51,53	120	34,82	120
M14	2,00	110	11	9,0	12,0	20	3			37,42	140				
M16	2,00	110	12	9,0	14,0	22	3	79,09	160	47,13	160	69,65	160	53,60	160
M20	2,50	140	16	12,0	17,5	25	3			74,32	200	124,80	200	81,95	200
M24	3,00	160	18	14,5	21,0	30	4							112,40	240

P	15	12	15	8
M	8			6
K	15	12	15	
N	22	22	24	22
S				
H				
O				

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

M

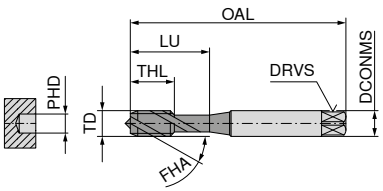

DIN 371 with reinforced shank

	VA	VA	VA	AL	AL
	C 2–3	C 2–3	C 2–3	C 2–3	C 2–3
	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	TiN		TiN		CrN
	HSS-E FHA 45° ≤ 1200 N/mm² ≤ 3xD	HSS-PM FHA 40° ≤ 1200 N/mm² ≤ 2,5xD	HSS-PM FHA 40° ≤ 1200 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 500 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 500 N/mm² ≤ 2,5xD
	23 416 ...	23 426 ...	23 456 ...	23 616 ...	23 614 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9		EUR T9		EUR T9		EUR T9		EUR T9	
M2	0,40	45	2,8	2,1	1,60	4	12	2	26,93	**020**								
M2,5	0,45	50	2,8	2,1	2,05	5	14	2	25,76	**025**								
M3	0,50	56	3,5	2,7	2,50	6	18	3	21,88	**030**	15,93	**030**	17,86	**030**	14,36	**030**	18,91	**030**
M4	0,70	63	4,5	3,4	3,30	7	21	3	22,92	**040**	16,19	**040**	19,43	**040**	14,36	**040**	18,91	**040**
M5	0,80	70	6,0	4,9	4,20	8	25	3	23,44	**050**	16,57	**050**	19,79	**050**	14,90	**050**	19,55	**050**
M6	1,00	80	6,0	4,9	5,00	10	30	3	29,39	**060**	16,83	**060**	25,49	**060**	14,90	**060**	19,55	**060**
M8	1,25	90	8,0	6,2	6,80	14	35	3	32,37	**080**	19,79	**080**	27,31	**080**	19,29	**080**	22,66	**080**
M10	1,50	100	10,0	8,0	8,50	16	39	3	40,91	**100**	23,84	**100**	37,66	**100**	23,04	**100**	27,70	**100**



DIN 376 with reduced shank

								23 417 ...		23 427 ...		23 457 ...			23 615 ...	
TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9		EUR T9		EUR T9			EUR T9	
M12	1,75	110	9	7,0	10,2	18	3			39,34	**120**	53,87	**120**		34,31	**120**
M12	1,75	110	9	7,0	10,2	18	4	48,42	**120**							
M14	2,00	110	11	9,0	12,0	20	4			51,79	**140**					
M16	2,00	110	12	9,0	14,0	22	3			56,31	**160**	67,85	**160**			
M16	2,00	110	12	9,0	14,0	22	4	66,03	**160**							
M20	2,50	140	16	12,0	17,5	25	3			83,90	**200**	134,70	**200**			
M20	2,50	140	16	12,0	17,5	25	4	113,80	**200**							
M24	3,00	160	18	14,5	21,0	30	4			106,20	**240**					

P	**10**	**8**	**10**		
M	**8**	**6**	**8**		
K					
N	**24**	**22**	**24**	**15**	**20**
S					
H					
O					

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

DuoTap | M

ST | HR

C 2–3 | C 2–3

ISO 2X 6HX | ISO 2X 6HX

nitr.

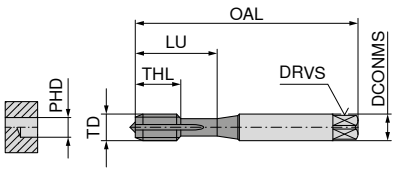

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xD

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 028 ... EUR U0		22 006 ... EUR U0	
M1,2	0,25	40	2,5	2,1	0,95	5	5	2	56,84	**012** [1]		
M1,4	0,30	40	2,5	2,1	1,10	6	6	2	45,91	**014** [1]		
M1,6	0,35	40	2,5	2,1	1,25	6	11	2	41,25	**016**		
M1,7	0,35	40	2,5	2,1	1,35	6	11	2	45,10	**017**		
M1,8	0,35	40	2,5	2,1	1,45	6	11	2	41,80	**018**		
M2	0,40	45	2,8	2,1	1,60	7	12	3	35,12	**020**		
M2,2	0,45	45	2,8	2,1	1,75	7	12	3	37,17	**022**		
M2,3	0,40	45	2,8	2,1	1,90	7	12	3	40,16	**023**		
M2,5	0,45	50	2,8	2,1	2,05	9	14	3	34,30	**025**		
M2,6	0,45	50	2,8	2,1	2,15	9	14	3	36,89	**026**		
M3	0,50	56	3,5	2,7	2,50	11	18	3	28,56	**030**	38,81	**030**
M3,5	0,60	56	4,0	3,0	2,90	12	20	3	29,24	**035**		
M4	0,70	63	4,5	3,4	3,30	13	21	3	28,95	**040**	40,16	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	3	29,24	**050**	41,80	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3	29,38	**060**	42,11	**060**
M7	1,00	80	7,0	5,5	6,00	17	30	3	41,80	**070**		
M8	1,25	90	8,0	6,2	6,80	20	35	3	33,50	**080**	46,73	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3	42,11	**100**	57,95	**100**

P	**12**	**6**
M		
K	**12**	**16**
N		**12**
S		
H		
O		

1) Tol. 4H/5H ≤ M1.4

Cutting speed v_c (m/min.)

DIN 376 can be found on the next page

6

Through hole / Blind hole – Machine taps, right hand

DuoTap | M

ST | HR

C | C

2–3 | 2–3

ISO 2X 6HX | ISO 2X 6HX

nitr.

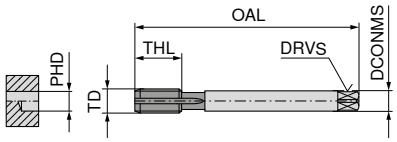

DIN 376 with reduced shank

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xD

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 029 ... EUR U0		22 007 ... EUR U0	
M4	0,70	63	2,8	2,1	3,3	13	3	36,35	**040**		
M5	0,80	70	3,5	2,7	4,2	15	3	37,17	**050**		
M6	1,00	80	4,5	3,4	5,0	17	3	37,17	**060**		
M8	1,25	90	6,0	4,9	6,8	20	3	46,98	**080**		
M10	1,50	100	7,0	5,5	8,5	22	3	52,59	**100**		
M12	1,75	110	9,0	7,0	10,2	24	3	54,24	**120**	73,78	**120**
M14	2,00	110	11,0	9,0	12,0	26	3	74,74	**140**		
M16	2,00	110	12,0	9,0	14,0	27	3	79,66	**160**	104,50	**160**
P									**12**		**6**
M											
K									**12**		**16**
N											**12**
S											
H											
O											

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

DuoTap | M

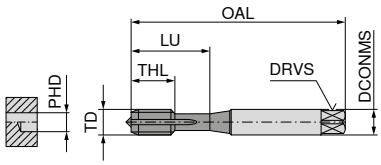

DIN 371 with reinforced shank

GG | C 2–3 | ISO 2X 6HX | nitr.

HSS-E
FHA 0°
≤ 1050 N/mm²
≤ 2xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 036 ... EUR U0		22 032 ... EUR U0	
M2	0,40	45	2,8	2,1	1,60	7	12	3			37,17	**020**
M2,5	0,45	50	2,8	2,1	2,05	9	14	3			37,17	**025**
M3	0,50	56	3,5	2,7	2,50	11	18	3			31,30	**030**
M3,5	0,60	56	4,0	3,0	2,90	12	20	3			34,30	**035**
M4	0,70	63	4,5	3,4	3,30	13	21	3			32,12	**040**
M5	0,80	70	6,0	4,9	4,20	15	25	3	50,01	**050**	34,17	**050**
M6	1,00	80	6,0	4,9	5,00	17	30	3	51,24	**060**	34,17	**060**
M8	1,25	90	8,0	6,2	6,80	20	35	3	56,43	**080**	40,03	**080**
M10	1,50	100	10,0	8,0	8,50	22	39	3	66,81	**100**	46,98	**100**



DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 033 ... EUR U0	
M6	1,00	80	4,5	3,4	5,0	17	3	40,86	**060**
M8	1,25	90	6,0	4,9	6,8	20	3	43,60	**080**
M10	1,50	100	7,0	5,5	8,5	22	3	50,01	**100**
M12	1,75	110	9,0	7,0	10,2	24	3	59,58	**120**
M14	2,00	110	11,0	9,0	12,0	26	3	78,82	**140**
M16	2,00	110	12,0	9,0	14,0	27	3	85,93	**160**

P		
M		
K	**16**	**16**
N	**12**	**12**
S		
H		
O		

Cutting speed v_c (m/min.)

6

Through hole / Blind hole – Machine taps, right hand

DuoTap | M

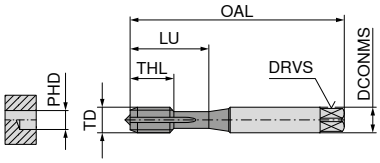

DIN 371 with reinforced shank

HT	HT
D 4–5	C 2–3
ISO 2X 6HX	ISO 2X 6HX
OSM	TiCN

Solid carbide
FHA 0°
≤ 63 HRC
≤ 1,5xD

HSS-PM
FHA 0°
44 - 52 HRC
≤ 1,5xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 806 ... EUR U0		22 227 ... EUR U0	
M3	0,50	63	4,5	3,4	2,55	6	18	4	255,00	**030**		
M4	0,70	63	4,5	3,4	3,40	8	20	4	255,00	**040**		
M5	0,80	70	6,0	4,9	4,30	10	26	4	288,30	**050**		
M6	1,00	80	6,0	4,9	5,00	10	30	4			166,70	**060**
M6	1,00	80	6,0	4,9	5,10	12	28	4	301,40	**060**		
M8	1,25	90	8,0	6,2	6,80	14	35	5			179,00	**080**
M8	1,25	90	8,0	6,2	6,90	15	35	5	336,10	**080**		
M10	1,50	100	10,0	8,0	8,50	18	38	5	415,80	**100**		
M10	1,50	100	10,0	8,0	8,50	16	39	5			224,10	**100**
M12	1,75	110	12,0	9,0	10,40	21	41	5	638,90	**120**		
M16	2,00	110	16,0	12,0	14,20	24	44	6	901,10	**160**		

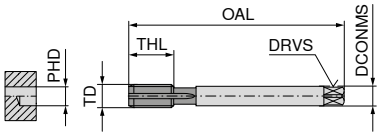

DIN 376 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 228 ... EUR U0	
M12	1,75	110	9	7	10,4	18	5	280,10	**120**
M16	2,00	110	12	9	14,2	22	6	383,90	**160**

P		
M		
K		
N		**22**
S		
H	**2**	**2**
O		

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

▲ EL = extra long, with double overall length

DuoTap | M

HR
EL

C
2–3

ISO 2X
6HX

nitr.

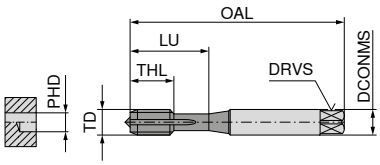

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

22 122 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
M3	0,50	100	3,5	2,7	2,5	11	18	3	71,32	**030**
M4	0,70	125	4,5	3,4	3,3	13	21	3	71,32	**040**
M5	0,80	140	6,0	4,9	4,2	15	25	3	75,43	**050**
M6	1,00	160	6,0	4,9	5,0	17	30	3	78,82	**060**
M8	1,25	180	8,0	6,2	6,8	20	35	3	93,60	**080**

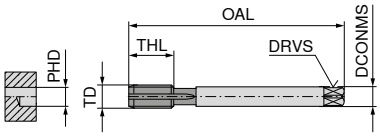

DIN 376 with reduced shank

22 123 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
M10	1,50	200	7	5,5	8,5	22	3	104,50	**100**
M12	1,75	224	9	7,0	10,2	24	3	125,30	**120**
M16	2,00	224	12	9,0	14,0	27	3	196,80	**160**
M20	2,50	280	16	12,0	17,5	32	4	267,80	**200**

P	**6**
M	
K	**16**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

M

GG

C
2–3

ISO 2X
6HX

TiCN

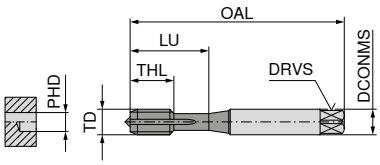

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 900 N/mm²
≤ 2xD

23 512 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9	
M5	0,80	70	6	4,9	4,2	15	25	3	21,63	**050**
M6	1,00	80	6	4,9	5,0	17	30	3	29,90	**060**
M8	1,25	90	8	6,2	6,8	20	35	3	31,45	**080**
M10	1,50	100	10	8,0	8,5	22	39	3	40,01	**100**

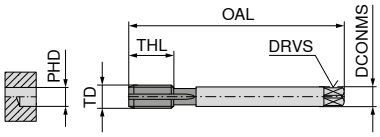

DIN 376 with reduced shank

23 513 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9	
M12	1,75	110	9	7	10,2	24	3	46,36	**120**

P	
M	
K	**20**
N	**24**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ HML = with soldered-in carbide strips for a higher cutting speed

DuoForm | M

NW HML | EC

C 2–3 | C 2–3

ISO 2X 6HX | ISO 2X 6HX

TiN

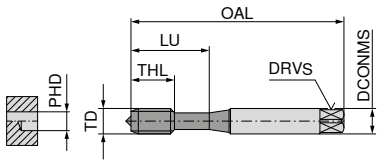

DIN 2174 with reinforced shank

HSS-E / HM
≤ 880 N/mm²
≤ 3xD

HSS-E
≤ 1100 N/mm²
≤ 1,5xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	22 473 ... EUR U0/4G		22 100 ... EUR U0	
M1	0,25	40	2,5	2,1	0,90	5	6,5			100,60	**010** 1)
M1,2	0,25	40	2,5	2,1	1,10	5	6,5			95,22	**012** 1)
M1,4	0,30	40	2,5	2,1	1,28	6	9,0			85,12	**014** 1)
M1,6	0,35	40	2,5	2,1	1,47	6	9,0			82,12	**016**
M1,7	0,35	40	2,5	2,1	1,57	6	9,0			90,16	**017**
M2	0,40	45	2,8	2,1	1,85	7	10,0			58,91	**020**
M2,5	0,45	50	2,8	2,1	2,33	9	14,0			57,10	**025**
M2,6	0,45	50	2,8	2,1	2,43	9	14,0			63,54	**026**
M3	0,50	56	3,5	2,7	2,80	11	18,0			54,65	**030**
M3,5	0,60	56	4,0	3,0	3,25	12	20,0			48,09	**035**
M4	0,70	63	4,5	3,4	3,70	13	21,0			55,88	**040**
M5	0,80	70	6,0	4,9	4,65	15	25,0			58,34	**050**
M6	1,00	80	6,0	5,0	5,60	18	30,0	312,40	**06000**		
M6	1,00	80	6,0	4,9	5,60	17	30,0			66,68	**060**
M8	1,25	90	8,0	6,2	7,40	20	35,0			73,23	**080**
M8	1,25	90	8,0	6,0	7,45	18	35,0	359,40	**08000**		
M10	1,50	100	10,0	8,0	9,35	22	39,0			92,90	**100**

1) Tol. ISO 1X 4HX ≤ M1.4

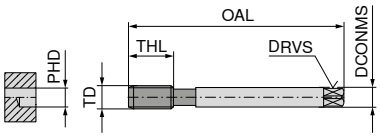

DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	22 101 ... EUR U0	
M12	1,75	110	9	7	11,25	24	102,00	**120**
M16	2,00	110	12	9	15,10	27	172,10	**160**

P		**18**
M		**10**
K		**10**
N	**30**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

6

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

DuoForm | M

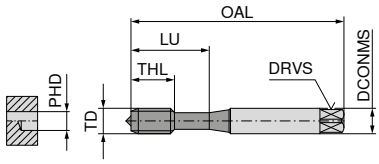

DIN 2174 with reinforced shank

	EC SN	EC SN	EC SN	EC SN
	C 2–3	C 2–3	C 2–3	C 2–3
	ISO 2X 6HX	ISO 3X 6GX	ISO 2X 6HX	ISO 2X 6HX
	nitr.	TiN	TiN GS	TiN
	HSS-E ≤ 1100 N/mm² ≤ 3xD	HSS-E ≤ 1100 N/mm² ≤ 3xD	HSS-E ≤ 1100 N/mm² ≤ 3xD	HSS-E ≤ 1100 N/mm² ≤ 3xD
	22 104 ...	**22 108 ...**	**22 154 ...**	**22 105 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
M2	0,40	45	2,8	2,1	1,85	7	10	3							67,63	**020**
M2,5	0,45	50	2,8	2,1	2,33	9	14	3							61,76	**025**
M3	0,50	56	3,5	2,7	2,80	11	18	3	42,11	**030**	56,71	**030**	78,16	**030**	59,58	**030**
M3,5	0,60	56	4,0	3,0	3,25	12	20	3							58,91	**035**
M4	0,70	63	4,5	3,4	3,70	13	21	4	43,60	**040**	58,91	**040**	80,36	**040**	61,76	**040**
M5	0,80	70	6,0	4,9	4,65	15	25	4	46,04	**050**	61,76	**050**	83,21	**050**		
M5	0,80	70	6,0	4,9	4,65	15	25	4							64,22	**050**
M6	1,00	80	6,0	4,9	5,60	17	30	4	46,73	**060**	72,14	**060**	91,96	**060**	72,82	**060**
M8	1,25	90	8,0	6,2	7,45	20	35	5	56,28	**080**	82,12	**080**	100,00	**080**	80,36	**080**
M10	1,50	100	10,0	8,0	9,35	22	39	6	72,14	**100**	104,00	**100**	121,60	**100**	100,60	**100**

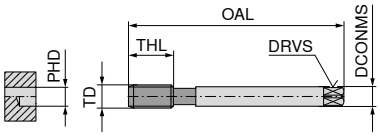

DIN 2174 with reduced shank

									22 106 ...	
TD mm	**TP mm**	**OAL mm**	**DCONMS mm**	**DRVS mm**	**PHD mm**	**THL mm**	**Flutes**		**EUR U0**	
M12	1,75	110	9	7	11,25	24	6		125,40	**120**
M14	2,00	110	11	9	13,10	26	5		241,80	**140**
M16	2,00	110	12	9	15,10	27	7		194,00	**160**

P	**12**	**18**	**18**	**18**
M		**10**	**10**	**10**
K	**8**	**10**	**10**	**10**
N	**12**	**22**	**22**	**22**
S				
H				
O				

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

DuoForm | M

NEO SN | C 2–3 | ISO 2X 6HX | TiN

NEO SN | C 2–3 | ISO 2X 6HX | TiN

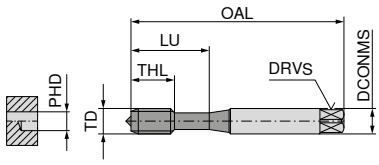

DIN 2174 with reinforced shank

HSS-PM
≤ 1100 N/mm²
≤ 3xD

HSS-PM
≤ 1100 N/mm²
≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 452 ... EUR U0		22 453 ... EUR U0	
M3	0,50	56	3,5	2,7	2,80	11	18	4	78,16	**030**		
M4	0,70	63	4,5	3,4	3,70	13	21	4	80,36	**040**		
M5	0,80	70	6,0	4,9	4,65	15	25	4	85,53	**050**	106,90	**050**
M6	1,00	80	6,0	4,9	5,60	17	30	5	107,80	**060**	130,30	**060**
M8	1,25	90	8,0	6,2	7,45	20	35	5	120,80	**080**	147,60	**080**
M10	1,50	100	10,0	8,0	9,35	22	39	5	157,20	**100**	187,30	**100**

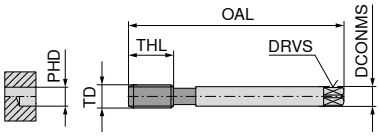

DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 452 ... EUR U0		22 454 ... EUR U0	
M12	1,75	110	9	7	11,25	24	6	181,60	**120**	218,60	**120**
M16	2,00	110	12	9	15,10	27	6	295,20	**160**	334,80	**160**

P	**18**	**18**
M	**10**	**10**
K	**10**	**10**
N	**22**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

M

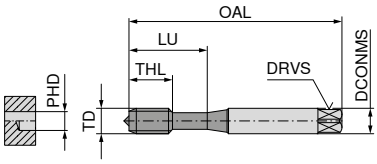

DIN 2174 with reinforced shank

UNI	UNI	UNI SN	UNI SN
C 2–3	C 2–3	C 2–3	C 2–3
ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX	ISO 2X 6HX
TiN	CrN	TiN	CrN

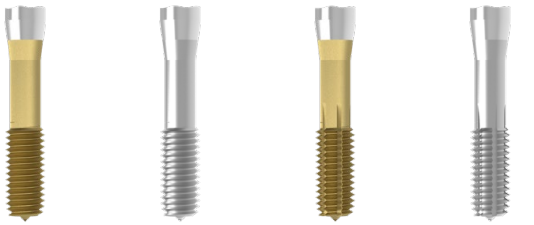

HSS-E ≤ 850 N/mm² ≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 810 ... EUR T9		23 812 ... EUR T9		23 814 ... EUR T9		23 816 ... EUR T9	
M2	0,40	45	2,8	2,1	1,85	7	12		31,86	**020**	31,20	**020**				
M2	0,40	45	2,8	2,1	1,85	7	12	3					36,12	**020**	35,61	**020**
M2,5	0,45	50	2,8	2,1	2,33	9	14		28,35	**025**	27,07	**025**				
M2,5	0,45	50	2,8	2,1	2,33	9	14	3					32,77	**025**	31,20	**025**
M3	0,50	56	3,5	2,7	2,80	11	18		20,58	**030**	19,55	**030**				
M3	0,50	56	3,5	2,7	2,80	11	18	3					23,44	**030**	22,66	**030**
M4	0,70	63	4,5	3,4	3,70	13	21		21,37	**040**	20,07	**040**				
M4	0,70	63	4,5	3,4	3,70	13	21	4					24,35	**040**	22,66	**040**
M5	0,80	70	6,0	4,9	4,65	15	25		22,66	**050**	20,98	**050**				
M5	0,80	70	6,0	4,9	4,65	15	25	4					25,76	**050**	23,95	**050**
M6	1,00	80	6,0	4,9	5,60	17	30		26,93	**060**	20,98	**060**				
M6	1,00	80	6,0	4,9	5,60	17	30	4					29,78	**060**	23,95	**060**
M8	1,25	90	8,0	6,2	7,45	20	35		30,03	**080**	24,22	**080**				
M8	1,25	90	8,0	6,2	7,45	20	35	5					33,65	**080**	28,21	**080**
M10	1,50	100	10,0	8,0	9,35	22	39		40,01	**100**	31,20	**100**				
M10	1,50	100	10,0	8,0	9,35	22	39	5					43,64	**100**	36,12	**100**

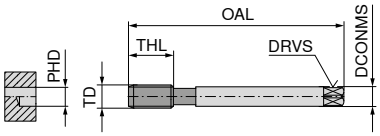

DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 811 ... EUR T9		23 813 ... EUR T9		23 815 ... EUR T9		23 817 ... EUR T9	
M12	1,75	110	9	7,0	11,25	24		45,70	**120**	38,20	**120**				
M12	1,75	110	9	7,0	11,25	24	5					51,14	**120**	43,89	**120**
M16	2,00	110	12	9,0	15,10	27		86,10	**160**	76,38	**160**				
M16	2,00	110	12	9,0	15,10	27	6					95,68	**160**	87,78	**160**
M18	2,50	125	14	11,0	16,80	30	6					176,50	**18000**		
M20	2,50	140	16	12,0	18,80	32	6					164,10	**20000**		
M24	3,00	160	18	14,5	22,60	34	6					219,30	**24000**		

P	**18**	**18**	**18**	**18**
M	**10**	**10**	**10**	**10**
K	**10**		**10**	
N	**22**	**18**	**22**	**18**
S				
H				
O				

Cutting speed v_c (m/min.)

Through hole – machine taps for wire thread inserts, right hand

TruTap | EG M

UNI

B
4–5

6H mod

nitr. + vap.

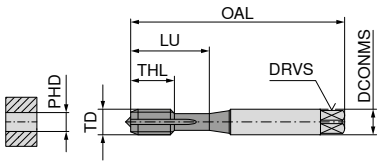

DIN 40435 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 662 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
EG-M2,5	0,45	56	3,5	2,7	2,65	11	18	3	62,84	**025**
EG-M3	0,50	63	4,5	3,4	3,15	10	21	3	52,20	**030**
EG-M4	0,70	70	6,0	4,9	4,20	12	25	3	54,24	**040**
EG-M5	0,80	80	6,0	4,9	5,25	13	30	3	52,59	**050**
EG-M6	1,00	90	8,0	6,2	6,30	17	35	3	53,16	**060**
EG-M8	1,25	100	10,0	8,0	8,40	18	39	3	63,40	**080**

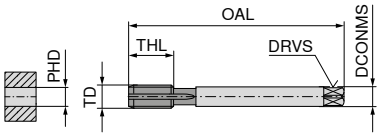

DIN 40435 with reduced shank

22 663 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
EG-M10	1,50	100	9	7,0	10,50	22	3	85,25	**100**
EG-M12	1,75	110	11	9,0	12,50	26	3	97,56	**120**
EG-M16	2,00	125	14	11,0	16,50	27	3	142,10	**160**
EG-M20	2,50	160	18	14,5	20,75	34	3	199,50	**200**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

6

Blind hole – machine taps for wire thread inserts, right hand

CavTap | EG M

UNI

C
2–3

6H mod

vap.

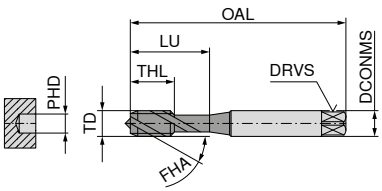

DIN 40435 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 664 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
EG-M2,5	0,45	56	3,5	2,7	2,65	5	18	3	60,12	**025**
EG-M3	0,50	63	4,5	3,4	3,15	5	21	3	54,78	**030**
EG-M4	0,70	70	6,0	4,9	4,20	8	25	3	54,78	**040**
EG-M5	0,80	80	6,0	4,9	5,25	8	30	3	50,56	**050**
EG-M6	1,00	90	8,0	6,2	6,30	10	35	3	54,78	**060**
EG-M8	1,25	100	10,0	8,0	8,40	16	39	3	61,36	**080**



DIN 40435 with reduced shank

22 665 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
EG-M10	1,50	100	9	7,0	10,50	15	5	78,42	**100**
EG-M12	1,75	110	11	9,0	12,50	20	4	96,08	**120**
EG-M16	2,00	125	14	11,0	16,50	20	5	144,80	**160**
EG-M20	2,50	160	18	14,5	20,75	30	4	196,80	**200**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

TruTap | MF

UNI | B 4–5 | ISO 2 6H | TiN

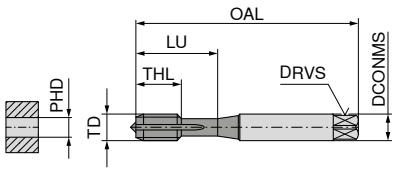

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 550 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
M5x0,5	0,50	70	6	4,9	4,5	11	25	3	73,37	**050**
M6x0,5	0,50	80	6	4,9	5,5	13	30	3	91,83	**060**
M6x0,75	0,75	80	6	4,9	5,2	13	30	3	91,83	**062**
M8x1	1,00	90	8	6,2	7,0	17	35	3	87,72	**080**
M10x1	1,00	90	10	8,0	9,0	18	35	4	99,62	**100**

P	**15**
M	**9**
K	**18**
N	**12**
S	
H	
O	

Cutting speed v_c (m/min.)

DIN 374 can be found on the next page

Through hole – Machine taps, right hand

▲ TS = for high-speed machining, up to 100 m/min.

TruTap | MF

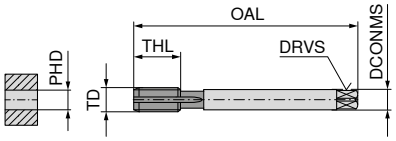

DIN 374 with reduced shank

	ST TS	UNI	UNI
	B 4–5	B 4–5	B 4–5
	ISO 2X 6HX	ISO 2 6H	ISO 2 6H
	TiN	nitr. + vap.	TiN
	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
	22 193 ...	**22 551 ...**	**22 552 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0		EUR U0		EUR U0	
M8x0,75	0,75	80	6	4,9	7,2	14	3			62,16	**082**		
M8x1	1,00	90	6	4,9	7,0	10	4	99,62	**080**				
M8x1	1,00	90	6	4,9	7,0	17	3			56,84	**084**	87,72	**080**
M10x0,75	0,75	90	7	5,5	9,2	18	4			83,36	**100**		
M10x1	1,00	90	7	5,5	9,0	10	4	106,90	**100**				
M10x1	1,00	90	7	5,5	9,0	18	4			57,95	**102**	96,08	**100**
M10x1,25	1,25	100	7	5,5	8,8	22	3			124,30	**104**		
M12x1	1,00	100	9	7,0	11,0	18	4			67,77	**120**	112,60	**121**
M12x1,25	1,25	100	9	7,0	10,8	22	3			94,27	**122**		
M12x1,5	1,50	100	9	7,0	10,5	15	4	102,60	**120**				
M12x1,5	1,50	100	9	7,0	10,5	22	3			64,22	**124**	99,62	**120**
M14x1	1,00	100	11	9,0	13,0	18	4			174,90	**140**		
M14x1,5	1,50	100	11	9,0	12,5	15	4	129,40	**140**				
M14x1,5	1,50	100	11	9,0	12,5	22	3			86,09	**144**	130,30	**140**
M16x1,5	1,50	100	12	9,0	14,5	15	4	172,10	**160**				
M16x1,5	1,50	100	12	9,0	14,5	22	3			102,60	**162**	134,60	**160**
M18x1	1,00	110	14	11,0	17,0	20	5			285,60	**180**		
M18x1,5	1,50	110	14	11,0	16,5	25	4			119,40	**182**		
M18x2	2,00	125	14	11,0	16,0	26	3			235,10	**184**		
M20x1	1,00	125	16	12,0	19,0	20	5			308,80	**200**		
M20x1,5	1,50	125	16	12,0	18,5	25	4			134,60	**202**	211,80	**200**
M22x1,5	1,50	125	18	14,5	20,5	25	4			147,60	**222**	257,00	**220**
M24x1,5	1,50	140	18	14,5	22,5	27	4			166,70	**242**		
M24x2	2,00	140	18	14,5	22,0	27	4			301,90	**244**		
M25x1,5	1,50	140	18	14,5	23,5	28	4			497,30	**250**		
M26x1,5	1,50	140	18	14,5	24,5	28	4			206,40	**260**		
M27x2	2,00	140	20	16,0	25,0	28	4			524,70	**272**		
M28x1,5	1,50	140	20	16,0	26,5	28	5			241,80	**280**		
M30x1,5	1,50	150	22	18,0	28,5	28	5			259,50	**302**		

P	**65**	**12**	**15**
M		**7**	**9**
K	**65**	**12**	**18**
N	**22**		**12**
S			
H			
O			

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

MF

UNI

B
4–5

ISO 2
6H

TiN



DIN 374 with reduced shank

HSS-PM
FHA 0°
≤ 1000 N/mm²
≤ 3xD

6

23 041 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9	
M8x1	1,00	90	6	4,9	7,0	17	3	27,85	**081**
M10x1	1,00	90	7	5,5	9,0	18	4	31,86	**102**
M10x1,25	1,25	100	7	5,5	8,8	22	3	34,17	**104**
M12x1	1,00	100	9	7,0	11,0	18	4	39,23	**120**
M12x1,25	1,25	100	9	7,0	10,8	22	3	41,03	**122**
M12x1,5	1,50	100	9	7,0	10,5	22	3	36,51	**121**
M14x1,25	1,25	100	11	9,0	12,8	22	3	47,40	**142**
M14x1,5	1,50	100	11	9,0	12,5	22	3	45,06	**144**
M16x1,5	1,50	100	12	9,0	14,5	22	3	51,02	**162**
M18x1,5	1,50	110	14	11,0	16,5	17	4	67,45	**182**
M20x1,5	1,50	125	16	12,0	18,5	17	4	91,15	**202**
M22x1,5	1,50	125	18	14,5	20,5	25	4	85,71	**222**
M24x1,5	1,50	140	18	14,5	22,5	27	4	98,39	**242**
M24x2	2,00	140	18	14,5	22,0	27	4	112,10	**244**

P	**15**
M	**9**
K	**18**
N	**12**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

MF

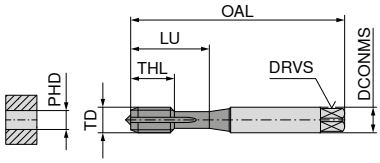

DIN 371 with reinforced shank

	UNI	UNI	FE	VA
	B 4–5	B 4–5	B 4–5	B 4–5
	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
	nitr. + vap.	TiN		TiN
	HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 850 N/mm² ≤ 3xD	HSS-E FHA 0° ≤ 1200 N/mm² ≤ 4xD
	23 140 ...	**23 142 ...**		**23 440 ...**

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9		EUR T9		EUR T9	
M4x0,5	0,50	63	4,5	3,4	3,5	10	21	3	19,68	**040**	26,54	**040**		
M5x0,5	0,50	70	6,0	4,9	4,5	11	25	3	19,68	**050**	26,81	**050**	32,62	**050**
M6x0,75	0,75	80	6,0	4,9	5,2	13	30	3	19,68	**062**	33,01	**062**	39,89	**062**
M6x0,5	0,50	80	6,0	4,9	5,5	13	30	3	20,98	**060**	33,01	**060**		

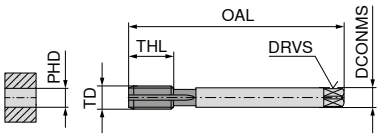

DIN 374 with reduced shank

								23 141 ...		**23 143 ...**		**23 241 ...**		**23 441 ...**	
TD	**TP**	**OAL**	**DCONMS**	**DRVS**	**PHD**	**THL**	**Flutes**	**EUR**		**EUR**		**EUR**		**EUR**	
mm	**mm**	**mm**	**mm**	**mm**	**mm**	**mm**		**T9**		**T9**		**T9**		**T9**	
M8x0,5	0,50	80	6	4,9	7,5	14	3					31,86	**080**		
M8x0,75	0,75	80	6	4,9	7,2	14	3	22,52	**082**	34,58	**082**	27,57	**082**	44,93	**082**
M8x1	1,00	90	6	4,9	7,0	17	3	17,61	**084**			26,02	**084**	42,21	**084**
M8x1	1,00	90	6	4,9	7,0	17	4			32,50	**084**				
M10x0,75	0,75	90	7	5,5	9,2	18	4	30,43	**100**	46,22	**100**	38,05	**100**		
M10x1	1,00	90	7	5,5	9,0	18	4	18,12	**102**	35,48	**102**	30,30	**102**	45,95	**102**
M10x1,25	1,25	100	7	5,5	8,8	22	3	27,44	**104**	43,50	**104**	31,33	**104**		
M12x1	1,00	100	9	7,0	11,0	18	4	23,30	**120**	40,78	**120**	35,07	**120**	52,96	**120**
M12x1,25	1,25	100	9	7,0	10,8	22	3	27,70	**122**	44,27	**122**	36,77	**122**		
M12x1,5	1,50	100	9	7,0	10,5	22	3	20,58	**124**	37,66	**124**	33,65	**124**	49,19	**124**
M14x1	1,00	100	11	9,0	13,0	18	4	33,01	**140**	48,94	**140**	43,24	**140**		
M14x1,5	1,50	100	11	9,0	12,5	22	3	29,39	**144**	50,11	**144**	41,55	**144**	64,98	**144**
M16x1	1,00	100	12	9,0	15,0	18	4	37,03	**160**	57,09	**160**	57,09	**160**		
M16x1,5	1,50	100	12	9,0	14,5	22	3	30,43	**162**	57,09	**162**	52,83	**162**	74,32	**162**
M18x1	1,00	110	14	11,0	17,0	20	5					75,48	**180**		
M18x1,5	1,50	110	14	11,0	16,5	25	4	41,96	**182**	70,56	**182**	68,62	**182**		
M20x1	1,00	125	16	12,0	19,0	20	5					81,55	**200**		
M20x1,5	1,50	125	16	12,0	18,5	25	4	46,74	**202**	89,45	**202**	76,13	**202**		
M22x1,5	1,50	125	18	14,5	20,5	25	4	52,83	**222**	92,96	**222**	87,64	**222**		
M24x1,5	1,50	140	18	14,5	22,5	27	4	60,85	**242**	97,36	**242**	102,20	**242**		
M26x1,5	1,50	140	18	14,5	24,5	28	4					130,70	**260**		
M28x1,5	1,50	140	20	16,0	26,5	28	5					150,20	**280**		
M30x1,5	1,50	150	22	18,0	28,5	28	5					167,10	**300**		

P	**12**	**15**	**12**	**10**
M	**7**	**9**		**8**
K	**12**	**18**	**12**	
N		**12**	**12**	**24**
S				
H				
O				

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | MF

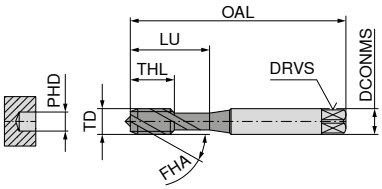

DIN 371 with reinforced shank

UNI	UNI	UNI
E 1,5–2	E 1,5–2	E 1,5–2
ISO 2 6H	ISO 2 6H	ISO 3 6G
vap.	TiN	vap.
HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 441 ... EUR U0	
M4x0,5	0,50	63	4,5	3,4	3,50	5	21	3	68,44	**040**
M6x0,75	0,75	80	6,0	4,9	5,25	8	30	3	68,44	**062**
M5x0,5	0,50	70	6,0	4,9	4,50	5	25	3	68,44	**050**



DIN 374 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 555 ... EUR U0		22 556 ... EUR U0		22 490 ... EUR U0	
M8x1	1,0	90	6	4,9	7,0	10	3	62,59	**080**	80,21	**080**	68,44	**080**
M10x1	1,0	90	7	5,5	9,0	10	4	67,49	**100**	102,60	**100**	75,43	**100**
M12x1,5	1,5	100	9	7,0	10,5	15	5	77,20	**120**	117,70	**120**	82,93	**120**
M14x1,5	1,5	100	11	9,0	12,5	15	5	99,62	**140**	150,30	**140**	109,30	**140**
M16x1,5	1,5	100	12	9,0	14,5	15	5	118,50	**160**	158,50	**160**	130,30	**160**
M18x1,5	1,5	110	14	11,0	16,5	17	5					150,30	**180**
M20x1,5	1,5	125	16	12,0	18,5	17	5					172,10	**200**
P									**12**		**15**		**12**
M									**7**		**9**		**7**
K									**12**		**18**		**12**
N											**12**		
S													
H													
O													

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

CavTap | MF

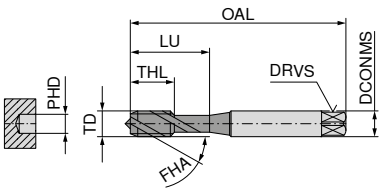

DIN 371 with reinforced shank

	UNI	UNI	UNI CNC	UNI CNC
	C 2–3	C 2–3	E 1,5–2	E 1,5–2
	ISO 2 6H	ISO 2 6H	7G	ISO 2 6H
	vap.	TiN	TiN GS	TiN GS
	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 45° ≤ 1100 N/mm² ≤ 3xD
				22 548 ...

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	EUR U0	
mm	mm	mm	mm	mm	mm	mm	mm			
M5x0,5	0,50	70	6	4,9	4,5	5	25	3	79,24	**050**
M6x0,5	0,50	80	6	4,9	5,5	5	30	3	79,24	**060**
M6x0,75	0,75	80	6	4,9	5,2	8	30	3	79,24	**062**



DIN 374 with reduced shank

								22 553 ...		22 554 ...		22 563 ...		22 549 ...	
TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	EUR U0		EUR U0		EUR U0		EUR U0	
mm	mm	mm	mm	mm	mm	mm									
M8x0,75	0,75	80	6	4,9	7,2	8	3							83,36	**082**
M8x1	1,00	90	6	4,9	7,0	10	3	59,29	**082**	80,21	**080**	121,00	**084**	101,00	**084**
M10x1	1,00	90	7	5,5	9,0	10	3	63,40	**100**	102,60	**100**				
M10x1	1,00	90	7	5,5	9,0	10	4					130,30	**102**	115,30	**102**
M12x1	1,00	100	9	7,0	11,0	11	4	80,21	**120**	120,40	**121**			132,70	**120**
M12x1,5	1,50	100	9	7,0	10,5	15	4	77,20	**124**	117,70	**120**				
M12x1,5	1,50	100	9	7,0	10,5	15	5					147,60	**124**	127,90	**124**
M14x1,5	1,50	100	11	9,0	12,5	15	4	95,22	**140**	136,20	**140**				
M14x1,5	1,50	100	11	9,0	12,5	15	5					181,60	**144**	162,70	**144**
M16x1,5	1,50	100	12	9,0	14,5	15	4	116,30	**160**	158,50	**160**				
M16x1,5	1,50	100	12	9,0	14,5	15	5					206,40	**162**	189,90	**162**
M18x1,5	1,50	110	14	11,0	16,5	17	4	142,10	**180**	202,20	**182**				
M18x1,5	1,50	110	14	11,0	16,5	17	5							232,20	**182**
M20x1,5	1,50	125	16	12,0	18,5	17	4	194,00	**200**	257,00	**202**				
M20x1,5	1,50	125	16	12,0	18,5	17	5					308,80	**202**	285,60	**202**
M22x1,5	1,50	125	18	14,5	20,5	17	4	188,50	**220**						
M24x1,5	1,50	140	18	14,5	22,5	20	5	205,00	**240**						
P									**12**		**15**		**15**		**15**
M									**7**		**9**		**9**		**9**
K									**12**		**18**		**18**		**18**
N											**12**		**12**		**12**
S															
H															
O															

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap SL | MF

ST | C 2–3 | ISO 2 6H

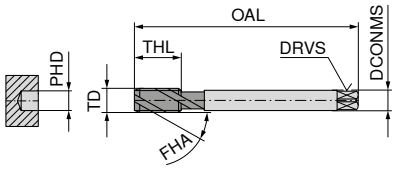

DIN 374 with reduced shank

HSS-E
FHA 15°
≤ 750 N/mm²
≤ 2xD

6

22 182 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
M6x0,75	0,75	80	4,5	3,4	5,2	13	3	62,84	**062**
M8x0,75	0,75	80	6,0	4,9	7,2	14	3	63,40	**082**
M8x1	1,00	90	6,0	4,9	7,0	17	3	57,95	**084**
M9x1	1,00	90	7,0	5,5	8,0	17	3	86,09	**090**
M10x1	1,00	90	7,0	5,5	9,0	18	3	61,07	**102**
M10x1,25	1,25	100	7,0	5,5	8,8	22	3	87,05	**104**
M11x1	1,00	90	8,0	6,2	10,0	18	3	96,75	**110**
M12x1	1,00	100	9,0	7,0	11,0	18	3	74,74	**120**
M12x1,25	1,25	100	9,0	7,0	10,8	22	3	96,75	**122**
M12x1,5	1,50	100	9,0	7,0	10,5	22	3	71,32	**124**
M14x1	1,00	100	11,0	9,0	13,0	18	4	98,66	**140**
M14x1,5	1,50	100	11,0	9,0	12,5	22	3	96,08	**144**
M15x1	1,00	100	12,0	9,0	14,0	18	4	129,40	**150**
M16x1	1,00	100	12,0	9,0	15,0	18	4	116,30	**160**
M16x1,5	1,50	100	12,0	9,0	14,5	22	3	113,40	**162**
M18x1	1,00	110	14,0	11,0	17,0	20	4	159,90	**180**

P	**12**
M	
K	**12**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | MF

VA | E 1,5–2 | ISO 2 6H | vap.

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

VA | E 1,5–2 | ISO 2 6H | TiN GS

HSS-E
FHA 45°
≤ 900 N/mm²
≤ 3xD

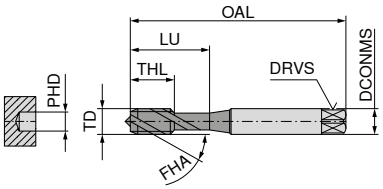

DIN 371 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 176 ... EUR U0	
M4x0,5	0,50	63	4,5	3,4	3,5	5	21	3	104,50	**040**
M5x0,5	0,50	70	6,0	4,9	4,5	5	25	3	80,21	**050**
M6x0,5	0,50	80	6,0	4,9	5,5	5	30	3	80,21	**060**
M6x0,75	0,75	80	6,0	4,9	5,2	8	30	3	80,21	**062**



DIN 374 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 189 ... EUR U0		22 177 ... EUR U0	
M8x0,75	0,75	80	6	4,9	7,2	8	3			84,30	**082**
M8x1	1,00	90	6	4,9	7,0	10	3	62,59	**082**	101,90	**084**
M10x1	1,00	90	7	5,5	9,0	10	4	72,68	**100**	116,30	**102**
M12x1	1,00	100	9	7,0	11,0	11	4	82,24	**121**	134,60	**120**
M12x1,5	1,50	100	9	7,0	10,5	15	5	80,21	**120**	129,40	**124**
M14x1,5	1,50	100	11	9,0	12,5	15	5	99,62	**140**	165,40	**144**
M16x1,5	1,50	100	12	9,0	14,5	15	5	120,40	**160**	192,80	**162**
M20x1,5	1,50	125	16	12,0	18,5	17	5	166,70	**200**		
M26x1,5	1,50	140	18	14,5	24,5	20	6	323,80	**260**		
M28x1,5	1,50	140	20	16,0	26,5	20	6	378,50	**280**		
M30x1,5	1,50	150	22	18,0	28,5	22	6	374,40	**300**		

P	**8**	**10**
M	**6**	**8**
K		
N	**22**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

MF

UNI

C
2–3

ISO 2
6H

TiN

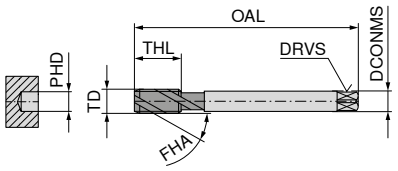

DIN 374 with reduced shank

HSS-PM
FHA 40°
≤ 1000 N/mm²
≤ 2,5xD

6

23 047 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9	
M8x1	1,00	90	6	4,9	7,0	10	35	3	27,31	**081**
M10x1	1,00	90	7	5,5	9,0	10	35	4	35,61	**102**
M10x1,25	1,25	100	7	5,5	8,8	16	39	4	34,70	**104**
M12x1	1,00	100	9	7,0	11,0	11	40	4	40,51	**120**
M12x1,25	1,25	100	9	7,0	10,8	15	40	5	44,14	**122**
M12x1,5	1,50	100	9	7,0	10,5	15	40	5	39,23	**121**
M14x1	1,00	100	11	9,0	12,8	11	40	4	47,40	**140**
M14x1,5	1,50	100	11	9,0	12,5	15	40	5	46,47	**144**
M16x1,5	1,50	100	12	9,0	14,5	15	44	5	60,20	**162**
M18x1,5	1,50	110	14	11,0	16,5	17	44	5	78,32	**182**
M20x1,5	1,50	125	16	12,0	18,5	17	44	5	89,32	**202**
M22x1,5	1,50	125	18	14,5	20,5	17	44	5	98,39	**222**
M24x1,5	1,50	140	18	14,5	22,5	20	48	5	100,20	**242**
M24x2	2,00	140	18	14,5	22,0	20	48	5	116,70	**244**

P	**15**
M	**9**
K	**18**
N	**12**
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

▲ NC = for synchronised CNC machining with minimum length compensation chuck

MF

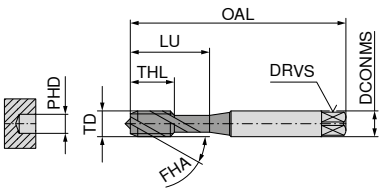

DIN 371 with reinforced shank

	FE	UNI NC	UNI	UNI
	C 2–3	E 1,5–2	C 2–3	C 2–3
	ISO 2 6H	ISO 2 6H	ISO 2 6H	ISO 2 6H
		TiN GS	vap.	TiN
	HSS-E FHA 35° ≤ 850 N/mm² ≤ 2,5xD	HSS-E FHA 45° ≤ 1000 N/mm² ≤ 3xD	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD	HSS-E FHA 35° ≤ 1000 N/mm² ≤ 2,5xD

TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	23 144 ... EUR T9		23 146 ... EUR T9	
mm	mm	mm	mm	mm	mm	mm	mm					
M4x0,5	0,50	63	4,5	3,4	3,5	5	21	3	19,68	**040**	28,61	**040**
M5x0,5	0,50	70	6,0	4,9	4,5	5	25	3	19,68	**050**	28,61	**050**
M6x0,5	0,50	80	6,0	4,9	5,5	5	30	3	21,49	**060**	33,27	**060**
M6x0,75	0,75	80	6,0	4,9	5,2	8	30	3	20,98	**062**	33,27	**062**



DIN 374 with reduced shank

TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	23 243 ... EUR T9		23 149 ... EUR T9		23 145 ... EUR T9		23 147 ... EUR T9	
mm	mm	mm	mm	mm	mm	mm									
M4x0,5	0,50	63	2,8	2,1	3,5	5	3					19,17	**040**		
M5x0,5	0,50	70	3,5	2,7	4,5	5	3					19,17	**050**		
M6x0,75	0,75	80	4,5	3,4	5,2	8	3					20,45	**062**		
M8x0,5	0,50	80	6,0	8,0	7,5	6	3	56,71	**080**						
M8x0,75	0,75	80	6,0	4,9	7,2	8	3	29,53	**082**	51,90	**082**	23,17	**082**	35,48	**082**
M8x1	1,00	90	6,0	4,9	7,0	10	3	27,70	**084**	48,67	**084**	16,96	**084**	33,27	**084**
M10x0,75	0,75	90	7,0	5,5	9,2	10	4	62,14	**100**			37,29	**100**	54,11	**100**
M10x1	1,00	90	7,0	5,5	9,0	10	3	32,50	**102**			17,75	**102**	37,29	**102**
M10x1	1,00	90	7,0	5,5	9,0	10	4			57,23	**102**				
M10x1,25	1,25	100	7,0	5,5	8,8	16	3	53,73	**104**			19,68	**104**	47,13	**104**
M12x1	1,00	100	9,0	7,0	11,0	11	4	37,42	**120**	65,13	**120**	23,84	**120**	43,75	**120**
M12x1,25	1,25	100	9,0	7,0	10,8	15	4	60,33	**122**			28,10	**122**	53,08	**122**
M12x1,5	1,50	100	9,0	7,0	10,5	15	4	35,99	**124**			20,98	**124**	42,21	**124**
M12x1,5	1,50	100	9,0	7,0	10,5	15	5			61,76	**124**				
M14x1	1,00	100	11,0	9,0	13,0	11	4	60,33	**140**			31,33	**140**	57,09	**140**
M14x1,5	1,50	100	11,0	9,0	12,5	15	4	44,27	**144**			28,49	**144**	53,08	**144**
M14x1,5	1,50	100	11,0	9,0	12,5	15	5			79,37	**144**				
M16x1	1,00	100	12,0	9,0	15,0	12	4	70,94	**160**			33,65	**160**	62,66	**160**
M16x1,5	1,50	100	12,0	9,0	14,5	15	4	56,46	**162**			32,62	**162**	62,66	**162**
M16x1,5	1,50	100	12,0	9,0	14,5	15	5			88,42	**162**				
M18x1,5	1,50	110	14,0	11,0	16,5	17	4	73,02	**182**			45,17	**182**	73,02	**182**
M18x1,5	1,50	110	14,0	11,0	16,5	17	5			112,10	**182**				
M20x1,5	1,50	125	16,0	12,0	18,5	17	4	81,55	**202**			41,55	**202**	92,96	**202**
M20x1,5	1,50	125	16,0	12,0	18,5	17	5			146,30	**202**				
M22x1,5	1,50	125	18,0	14,5	20,5	17	4	94,37	**222**			61,76	**222**	103,30	**222**
M24x1,5	1,50	140	18,0	14,5	22,5	20	5	110,10	**242**			67,32	**242**	110,30	**242**

P	**12**	**15**	**12**	**15**
M		**9**	**7**	**9**
K	**12**	**18**	**12**	**18**
N	**22**	**12**		**12**
S				
H				
O				

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

MF

VA

E
1,5–2

ISO 2
6H

TiN

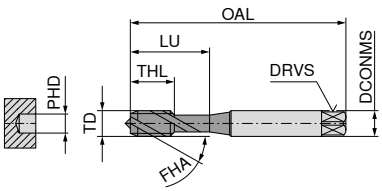

DIN 371 with reinforced shank

HSS-E
FHA 45°
≤ 1200 N/mm²
≤ 3xD

23 442 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9	
M5x0,5	0,50	70	6	4,9	4,5	5	25	3	34,58	**050**
M6x0,75	0,75	80	6	4,9	5,2	8	30	3	40,67	**062**



DIN 374 with reduced shank

23 443 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9	
M8x0,75	0,75	80	6	4,9	7,2	8	3	43,38	**082**
M8x1	1,00	90	6	4,9	7,0	10	3	40,67	**084**
M10x1	1,00	90	7	5,5	9,0	10	4	45,70	**102**
M12x1	1,00	100	9	7,0	11,0	11	4	53,60	**120**
M12x1,5	1,50	100	9	7,0	10,5	15	5	51,53	**124**
M14x1,5	1,50	100	11	9,0	12,5	15	5	65,38	**144**
M16x1,5	1,50	100	12	9,0	14,5	15	5	75,09	**162**

P	**10**
M	**8**
K	
N	**24**
S	
H	
O	

Cutting speed v_c (m/min.)

6

Through hole / Blind hole – Machine taps, right hand

DuoTap | MF

HR | C 2–3 | ISO 2X 6HX | nitr.

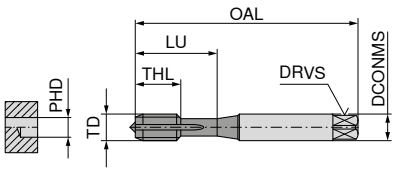

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

22 146 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
M4x0,5	0,50	63	4,5	3,4	3,5	10	21	3	59,29	**040**
M5x0,5	0,50	70	6,0	4,9	4,5	11	25	3	59,29	**050**
M6x0,5	0,50	80	6,0	4,9	5,5	13	30	3	59,29	**060**
M6x0,75	0,75	80	6,0	4,9	5,2	13	30	3	59,29	**062**

P	**6**
M	
K	**16**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

DIN 374 can be found on the next page

Through hole / Blind hole – Machine taps, right hand

DuoTap | MF

HR | C 2–3 | ISO 2X 6HX | nitr.

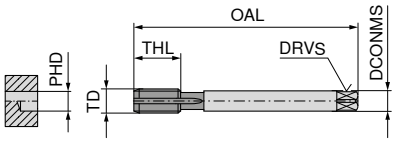

DIN 374 with reduced shank

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

22 209 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
M8x1	1,0	90	6	4,9	7,0	17	3	59,29	**082**
M10x1	1,0	90	7	5,5	9,0	18	4	59,29	**100**
M12x1,5	1,5	100	9	7,0	10,5	22	4	71,32	**120**
M14x1,5	1,5	100	11	9,0	12,5	22	4	91,83	**140**
M16x1,5	1,5	100	12	9,0	14,5	22	4	99,62	**160**
M18x1,5	1,5	110	14	11,0	16,5	25	4	118,50	**180**
M20x1,5	1,5	125	16	12,0	18,5	25	4	150,30	**200**

P	**6**
M	
K	**16**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

6

Through Hole / Blind Hole – Machine taps

▲ ES = extra short

▲ LH = for left hand threads; ES = extra short

DuoTap | MF

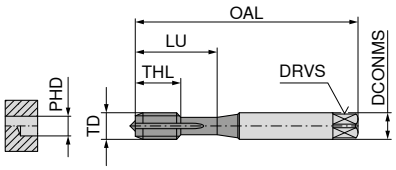

DIN 2181 with reinforced shank

ST ES | C 2–3 | ISO 2X 6HX

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xD

ST LH/ES | C 2–3 | ISO 2X 6HX

HSS-E
FHA 0°
≤ 750 N/mm²
≤ 2xD

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 179 ... EUR U0		22 200 ... EUR U0	
M3x0,35	0,35	40	3,5	2,7	2,65	8	18	3	51,24	**030**		
M4x0,35	0,35	45	4,5	3,4	3,65	9	22	3	73,37	**040**		
M4x0,5	0,50	45	4,5	3,4	3,50	9	22	3	51,24	**042**		
M4,5x0,5	0,50	50	6,0	4,9	4,00	10	24	3	85,25	**045**		
M5x0,5	0,50	50	6,0	4,9	4,50	11	25	3	51,24	**050**		
M6x0,5	0,50	56	6,0	4,9	5,50	12	27	3	53,84	**060**		
M6x0,75	0,75	56	6,0	4,9	5,20	12	27	3	51,24	**062**	71,32	**062**
M7x0,75	0,75	56	6,0	4,9	6,20	14		3	57,66	**070**		
M8x0,5	0,50	56	6,0	4,9	7,50	14		4	71,32	**080**		
M8x0,75	0,75	56	6,0	4,9	7,20	14		3	57,66	**082**		
M8x1	1,00	63	6,0	4,9	7,00	17		3	51,24	**084**	71,32	**084**
M9x1	1,00	63	7,0	5,5	8,00	17		4	71,32	**090**		
M10x0,75	0,75	63	7,0	5,5	9,20	18		4	75,43	**100**		
M10x1	1,00	63	7,0	5,5	9,00	18		4	53,84	**102**	73,37	**102**
M10x1,25	1,25	70	7,0	5,5	8,80	22		3	69,02	**104**		
M11x1	1,00	63	8,0	6,2	10,00	18		4	83,36	**110**		
M12x1	1,00	70	9,0	7,0	11,00	18		4	63,40	**120**	87,72	**120**
M12x1,25	1,25	70	9,0	7,0	10,80	20		4	71,32	**122**		
M12x1,5	1,50	70	9,0	7,0	10,50	20		4	61,76	**124**	85,25	**124**
M13x1	1,00	70	11,0	9,0	12,00	18		4	93,60	**130**		
M14x1	1,00	70	11,0	9,0	13,00	18		4	83,36	**140**		
M14x1,25	1,25	70	11,0	9,0	12,80	20		4	83,36	**142**		
M14x1,5	1,50	70	11,0	9,0	12,50	20		4	78,82	**144**	112,60	**144**
M15x1	1,00	70	12,0	9,0	14,00	18		5	101,00	**150**		
M16x1	1,00	70	12,0	9,0	15,00	18		5	95,22	**160**		
M16x1,5	1,50	70	12,0	9,0	14,50	20		4	87,72	**162**	123,70	**162**
M18x1	1,00	80	14,0	11,0	17,00	18		5	123,70	**180**		
M18x1,5	1,50	80	14,0	11,0	16,50	22		4	102,60	**182**	146,20	**182**
M18x2	2,00	80	14,0	11,0	16,00	22		4	123,70	**184**		
M20x1,5	1,50	80	16,0	12,0	18,50	22		4	120,40	**202**	166,70	**202**
M20x2	2,00	80	16,0	12,0	18,00	22		4	130,30	**204**		

P	**12**	**12**
M		
K	**12**	**12**
N	**22**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

▲ HML = with soldered-in carbide strips for a higher cutting speed

DuoForm | MF

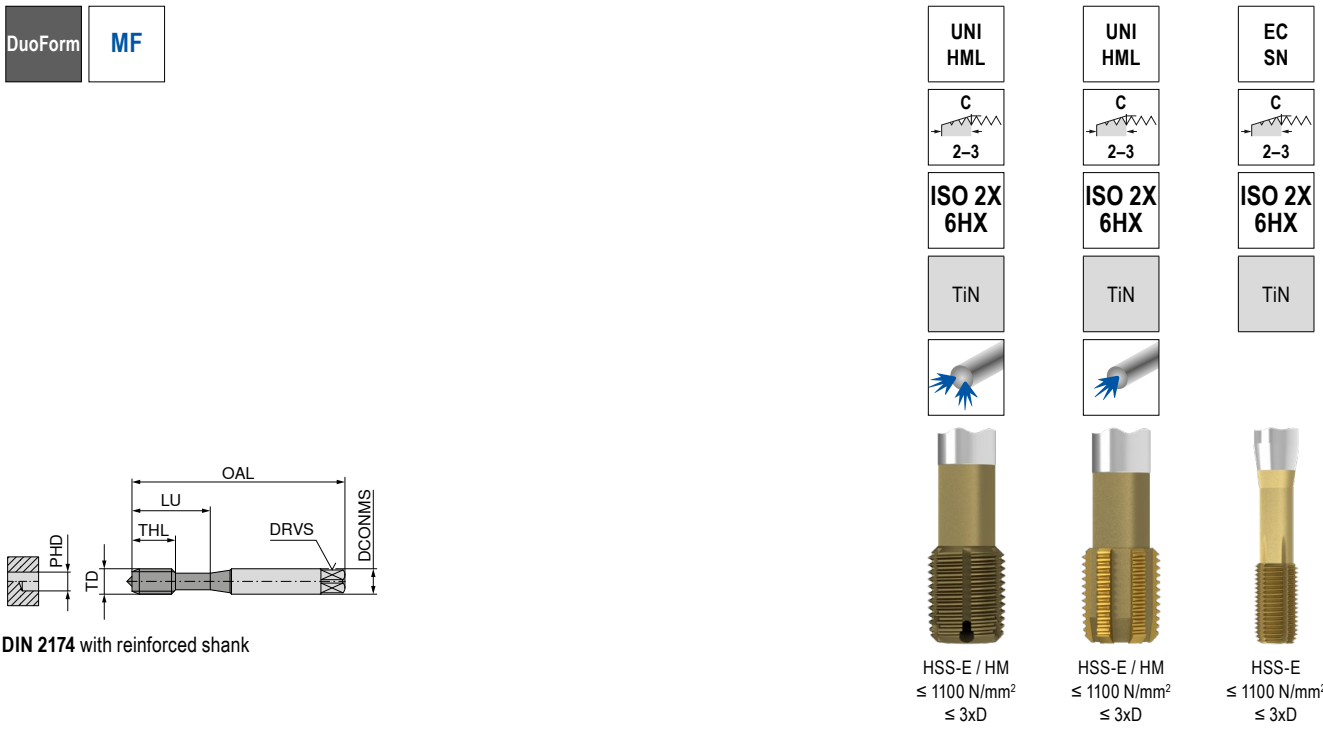

DIN 2174 with reinforced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 205 ... EUR U0	
M4x0,5	0,50	63	4,5	3,4	3,8	10	21	4	126,40	**040**
M5x0,5	0,50	70	6,0	4,9	4,8	11	25	4	112,60	**050**
M6x0,5	0,50	80	6,0	4,9	5,8	13	30	5	126,40	**060**
M6x0,75	0,75	80	6,0	4,9	5,7	13	30	4	100,60	**062**
M8x0,75	0,75	80	8,0	6,2	7,7	14	30	5	112,60	**080**
M8x1	1,00	90	8,0	6,2	7,6	17	35	5	119,40	**082**
M10x1	1,00	90	10,0	8,0	9,6	18	35	5	110,90	**100**



DIN 2174 with reduced shank

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 474 ... EUR U0/4G		22 474 ... EUR U0/4G		22 197 ... EUR U0	
M12x1	1,0	100	9	7	11,60	18	6					128,80	**120**
M12x1,5	1,5	100	9	7	11,35	13				474,80	**12000**		
M12x1,5	1,5	100	9	7	11,35	22	6					130,60	**124**
M14x1,5	1,5	100	11	9	13,35	22	6					166,70	**140**
M16x1,5	1,5	100	12	9	15,35	18		678,40	**16100**	541,80	**16000**		
M16x1,5	1,5	100	12	9	15,35	22	6					188,50	**160**
M20x1,5	1,5	125	16	12	19,35	25	6					263,70	**200**
P								**30**		**30**		**18**	
M								**20**		**20**		**10**	
K								**30**		**30**		**10**	
N								**40**		**40**		**22**	
S													
H													
O													

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

MF

UNI
SN

C
2–3

ISO 2X
6HX

TiN

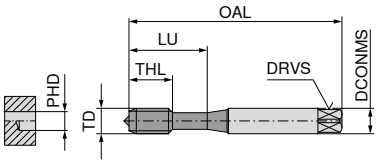

DIN 2174 with reinforced shank

HSS-E
≤ 850 N/mm²
≤ 3xD

23 842 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9	
M4x0,5	0,50	63	4,5	3,4	3,80	10	21	4	55,80	**040**
M5x0,5	0,50	70	6,0	4,9	4,80	11	25	4	50,22	**050**
M6x0,5	0,50	80	6,0	4,9	5,80	13	30	5	56,05	**060**
M8x1	1,00	90	8,0	6,2	7,60	17	35	5	53,33	**084**
M10x1	1,00	90	10,0	8,0	9,60	18	35	5	59,04	**102**
M10x1,25	1,25	100	10,0	8,0	9,45	18	39	5	72,11	**104**



DIN 2174 with reduced shank

23 843 ...

TD mm	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9	
M12x1,25	1,25	100	9	7	11,45	22	6	78,72	**122**
M12x1,5	1,50	100	9	7	11,35	22	6	70,31	**124**
M14x1,5	1,50	100	11	9	13,35	22	6	87,27	**144**
M16x1,5	1,50	100	12	9	15,35	22	6	101,80	**162**

P	**18**
M	**10**
K	**10**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

TruTap | G

UNI | VA

B 4–5 | B 4–5

ISO 228 | ISO 228

TiN | nitr.

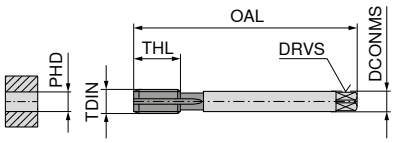

DIN 5156 with reduced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

HSS-E
FHA 0°
≤ 900 N/mm²
≤ 4xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 630 ... EUR U0		22 352 ... EUR U0	
1/8-28	0,907	90	7	5,5	8,80	18	3	102,60	**012**	73,37	**012**
1/4-19	1,337	100	11	9,0	11,80	22	3	135,40	**025**	96,08	**025**
3/8-19	1,337	100	12	9,0	15,25	22	3	158,50	**037**	119,40	**037**
1/2-14	1,814	125	16	12,0	19,00	25	4	243,30	**050**	158,50	**050**
3/4-14	1,814	140	20	16,0	24,50	28	4			235,10	**075**
1-11	2,309	160	25	20,0	30,75	30	4			359,40	**100**

P	**15**	**8**
M	**9**	**6**
K	**18**	
N	**12**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

G

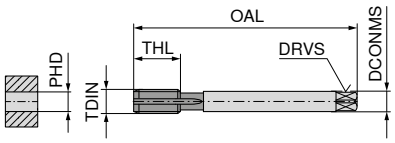

DIN 5156 with reduced shank

UNI
B
4–5
ISO 228
nitr. + vap.

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 3xD

UNI
B
4–5
ISO 228
TiN

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 3xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 161 ... EUR T9		23 160 ... EUR T9	
1/8-28	0,907	90	7	5,5	8,80	18	3	20,07	**012**	37,03	**012**
1/4-19	1,337	100	11	9,0	11,80	22	3	27,07	**025**	48,94	**025**
3/8-19	1,337	100	12	9,0	15,25	22	3	33,15	**037**	57,61	**037**
1/2-14	1,814	125	16	12,0	19,00	25	4	45,83	**050**	88,42	**050**
3/4-14	1,814	140	20	16,0	24,50	28	4	89,73	**075**	115,80	**075**
1-11	2,309	160	25	20,0	30,75	30	4	99,04	**100**	213,50	**100**

P	**12**	**15**
M	**7**	**9**
K	**12**	**18**
N		**12**
S		
H		
O		

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | G

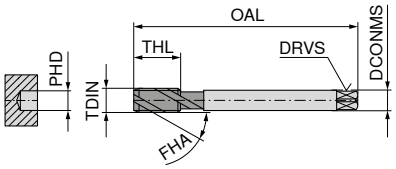

DIN 5156 with reduced shank

UNI	UNI	UNI	UNI	UNI
C 2–3	C 2–3	E 1,5–2	E 1,5–2	E 1,5–2
ISO 228	ISO 228	ISO 228	ISO 228	ISO 228 +0,05
vap.	TiN	vap.	TiN	vap.
HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD
22 633 ...	**22 634 ...**	**22 635 ...**	**22 636 ...**	**22 639 ...**

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0		EUR U0		EUR U0		EUR U0		EUR U0	
1/8-28	0,907	90	7	5,5	8,80	10	3	76,10	**012**	106,90	**012**						
1/8-28	0,907	90	7	5,5	8,80	10	4					78,02	**012**	106,90	**012**	102,60	**012**
1/4-19	1,337	100	11	9,0	11,80	15	4	106,90	**025**	133,80	**025**						
1/4-19	1,337	100	11	9,0	11,80	15	5					103,40	**025**	133,80	**025**	135,40	**025**
3/8-19	1,337	100	12	9,0	15,25	15	4	131,20	**037**	188,50	**037**						
3/8-19	1,337	100	12	9,0	15,25	15	5					127,90	**037**	188,50	**037**	168,00	**037**
1/2-14	1,814	125	16	12,0	19,00	17	4	173,50	**050**	270,60	**050**						
1/2-14	1,814	125	16	12,0	19,00	17	5					166,70	**050**	262,40	**050**	215,80	**050**
3/4-14	1,814	140	20	16,0	24,50	20	4	267,80	**075**								
3/4-14	1,814	140	20	16,0	24,50	20	5									328,00	**075**
1-11	2,309	160	25	20,0	30,75	24	6									500,10	**100**
P								**12**		**15**		**12**		**15**		**12**	
M								**7**		**9**		**7**		**9**		**7**	
K								**12**		**18**		**12**		**18**		**12**	
N										**12**				**12**			
S																	
H																	
O																	

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

▲ CNC = for synchronised CNC machining with minimum length compensation chuck

CavTap | G

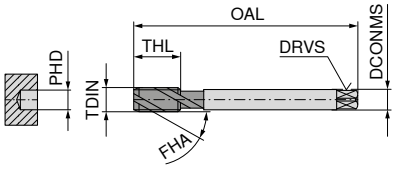

DIN 5156 with reduced shank

UNI CNC	ST	VA	VA
E 1,5–2	C 2–3	E 1,5–2	E 1,5–2
ISO 228	ISO 228	ISO 228	ISO 228
TiN GS		vap.	TiN GS

HSS-E
FHA 45°
≤ 1100 N/mm²
≤ 3xD

HSS-E
FHA 42°
≤ 750 N/mm²
≤ 3xD

HSS-E
FHA 42°
≤ 900 N/mm²
≤ 3xD

HSS-E
FHA 45°
≤ 900 N/mm²
≤ 3xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 624 ... EUR U0		22 354 ... EUR U0		22 355 ... EUR U0		22 358 ... EUR U0	
1/8-28	0,907	90	7	5,5	8,80	10	3			65,17	**012**			124,30	**012**
1/8-28	0,907	90	7	5,5	8,80	10	4	122,20	**012**			78,02	**012**		
1/4-19	1,337	100	11	9,0	11,80	15	4			91,00	**025**				
1/4-19	1,337	100	11	9,0	11,80	15	5	159,90	**025**			103,40	**025**	161,20	**025**
3/8-19	1,337	100	12	9,0	15,25	15	4			111,20	**037**				
3/8-19	1,337	100	12	9,0	15,25	15	5	189,90	**037**			127,90	**037**	192,80	**037**
1/2-14	1,814	125	16	12,0	19,00	17	4			143,40	**050**				
1/2-14	1,814	125	16	12,0	19,00	17	5	287,00	**050**			162,70	**050**	291,20	**050**
5/8-14	1,814	125	18	14,5	21,00	17	5					213,30	**062**		
3/4-14	1,814	140	20	16,0	24,50	20	4			228,20	**075**				
3/4-14	1,814	140	20	16,0	24,50	20	5					273,40	**075**		
1-11	2,309	160	25	20,0	30,75	24	5			347,10	**100**				
1-11	2,309	160	25	20,0	30,75	24	6					401,80	**100**		

P	**15**	**12**	**8**	**10**
M	**9**		**6**	**8**
K	**18**	**12**		
N	**12**	**22**	**22**	**22**
S				
H				
O				

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

G

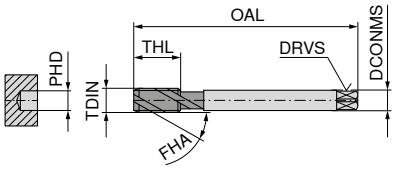

DIN 5156 with reduced shank

UNI
C
2–3
ISO 228
vap.

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

23 163 ...

UNI
C
2–3
ISO 228
TiN

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

23 162 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9		EUR T9	
1/8-28	0,907	90	7	5,5	8,80	10	3	20,98	**012**	38,59	**012**
1/4-19	1,337	100	11	9,0	11,80	15	4	29,90	**025**	53,08	**025**
3/8-19	1,337	100	12	9,0	15,25	15	4	43,50	**037**	62,66	**037**
1/2-14	1,814	125	16	12,0	19,00	17	4	56,05	**050**	94,37	**050**
3/4-14	1,814	140	20	16,0	24,50	20	4	85,95	**075**	121,20	**075**
1-11	2,309	160	25	20,0	30,75	24	5	119,60	**100**	230,40	**100**

P	**12**	**15**
M	**7**	**9**
K	**12**	**18**
N		**12**
S		
H		
O		

Cutting speed v_c (m/min.)

6

Through hole / Blind hole – Machine taps, right hand

DuoTap | G

HR

C
2–3

ISO 228
X

nitr.

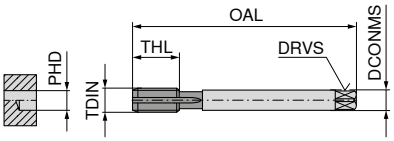

DIN 5156 with reduced shank

HSS-E
FHA 0°
≤ 1400 N/mm²
≤ 2xD

22 339 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
1/8-28	0,907	90	7	5,5	8,80	18	4	63,40	**012**
1/4-19	1,337	100	11	9,0	11,80	22	4	85,25	**025**
3/8-19	1,337	100	12	9,0	15,25	22	4	106,90	**037**
1/2-14	1,814	125	16	12,0	19,00	25	4	147,60	**050**

P	**6**
M	
K	**16**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

DuoForm | G

EC
SN

C
2–3

ISO 228

TiN

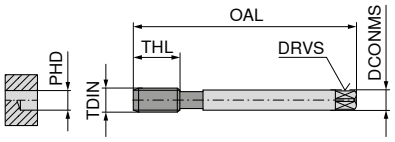

DIN 2189 with reduced shank

HSS-E
≤ 1100 N/mm²
≤ 3xD

22 359 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
1/8-28	0,907	90	7	5,5	9,25	18	5	138,00	**012**
1/4-19	1,337	100	11	9,0	12,55	22	6	173,50	**025**
3/8-19	1,337	100	12	9,0	16,05	22	6	237,70	**037**
1/2-14	1,814	125	16	12,0	20,10	25	6	318,30	**050**

P	**18**
M	**10**
K	**10**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

TruTap | UNC

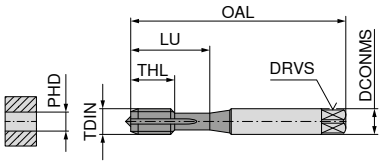

DIN 371 with reinforced shank

	VA	Ti	UNI
	B 4–5	B 4–5	B 4–5
	2B	2BX	2B
	nitr.	TiN	nitr. + vap.
	HSS-E FHA 0° ≤ 900 N/mm² ≤ 4xD	HSS-PM FHA 0° ≤ 44 HRC ≤ 4xD	HSS-E FHA 0° ≤ 1100 N/mm² ≤ 4xD
	22 250 ...	**22 269 ...**	**22 572 ...**

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0		EUR U0		EUR U0	
Nr. 2-56	0,454	45	2,8	2,1	1,85	7	12	2					99,62	**002**
Nr. 4-40	0,635	56	3,5	2,7	2,35	11	18	2					54,78	**004**
Nr. 4-40	0,635	56	3,5	2,7	2,35	11	18	3			87,72	**004**		
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3	46,73	**006**	77,20	**006**	48,92	**006**
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3	45,91	**008**	78,82	**008**	46,33	**008**
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3	45,91	**010**	79,66	**010**	52,20	**010**
Nr. 12-24	1,058	80	6,0	4,9	4,50	16	30	3					62,59	**012**
1/4-20	1,270	80	7,0	5,5	5,10	17	30	3	58,34	**025**	84,30	**025**	56,43	**025**
5/16-18	1,411	90	8,0	6,2	6,60	20	35	3	58,91	**031**	93,60	**031**	64,90	**031**
3/8-16	1,588	100	10,0	8,0	8,00	22	39	3	59,71	**037**	109,30	**037**	72,14	**037**



DIN 376 with reduced shank

													22 573 ...	
TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes						EUR U0	
1/2-13	1,954	110	9	7,0	10,80	25	3						86,09	**050**
5/8-11	2,309	110	12	9,0	13,50	27	3						120,40	**062**
3/4-10	2,540	125	14	11,0	16,50	30	3						149,00	**075**
7/8-9	2,822	140	18	14,5	19,50	32	3						189,90	**087**
1-8	3,175	160	18	14,5	22,25	36	3						241,80	**100**

P	**8**	**7**	**12**
M	**6**	**7**	**7**
K			**12**
N	**22**		
S		**5**	
H			
O			

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

UNC

UNI | FE-HF | VA

B 4–5

2B

TiN | TiCN | nitr.

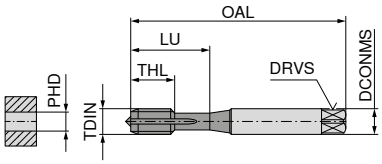

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1000 N/mm²
≤ 3xD

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 3xD

HSS-E
FHA 0°
≤ 1000 N/mm²
≤ 3xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 170 ... EUR T9		23 370 ... EUR T9		23 470 ... EUR T9	
Nr. 4-40	0,635	56	3,5	2,7	2,30	11	18	2	24,22	**004**	34,31	**004**	20,07	**004**
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3	23,30	**006**	33,27	**006**	18,64	**006**
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3	23,30	**008**	33,27	**008**	18,12	**008**
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3	24,22	**010**	34,58	**010**	20,07	**010**
1/4-20	1,270	80	7,0	5,5	5,10	17	30	3	31,86	**025**	48,03	**025**	21,49	**025**
5/16-18	1,411	90	8,0	6,2	6,60	20	35	3	34,82	**031**	52,31	**031**	24,47	**031**
3/8-16	1,588	100	10,0	8,0	8,00	22	39	3	41,43	**037**	61,76	**037**	27,70	**037**

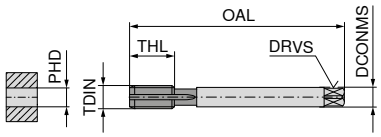

DIN 376 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 171 ... EUR T9	
7/16-14	1,814	100	8	6,2	9,40	22	3	48,16	**043**
1/2-13	1,954	110	9	7,0	10,75	25	3	53,87	**050**
5/8-11	2,309	110	12	9,0	13,50	27	3	67,19	**062**
3/4-10	2,540	125	14	11,0	16,50	30	3	101,80	**075**

P	**15**	**15**	**8**
M	**9**		**6**
K	**18**	**15**	
N	**12**	**15**	**22**
S			
H			
O			

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

CavTap | UNC

UNI | VA

C 2–3 | C 2–3

2B | 2B

vap. | vap.

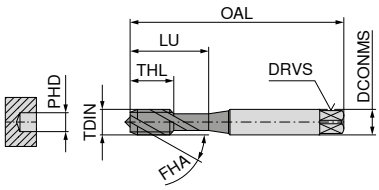

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

HSS-E
FHA 42°
≤ 900 N/mm²
≤ 3xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 582 ... EUR U0		22 266 ... EUR U0	
Nr. 4-40	0,635	56	3,5	2,7	2,35	6	18	2	49,73	**004**		
Nr. 6-32	0,794	56	4,0	3,0	2,85	7	20	3	43,60	**006**	47,67	**006**
Nr. 8-32	0,794	63	4,5	3,4	3,50	8	21	3	46,73	**008**	50,98	**008**
Nr. 10-24	1,058	70	6,0	4,9	3,90	10	25	3	48,92	**010**	54,24	**010**
1/4-20	1,270	80	7,0	5,5	5,10	13	30	3	52,59	**025**	55,46	**025**
5/16-18	1,411	90	8,0	6,2	6,60	14	35	3	56,02	**031**	62,84	**031**
3/8-16	1,588	100	10,0	8,0	8,00	16	39	3	62,84	**037**	65,17	**037**



DIN 376 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 583 ... EUR U0		22 267 ... EUR U0	
7/16-14	1,814	100	8	6,2	9,40	18	3	86,09	**043**		
7/16-14	1,814	100	8	6,2	9,40	18	4			109,30	**043**
1/2-13	1,954	110	9	7,0	10,80	20	3	86,09	**050**		
1/2-13	1,954	110	9	7,0	10,80	20	4			96,08	**050**
9/16-12	2,117	110	11	9,0	12,25	20	3	122,20	**056**		
5/8-11	2,309	110	12	9,0	13,50	22	3	113,40	**062**		
5/8-11	2,309	110	12	9,0	13,50	22	4			123,70	**062**
3/4-10	2,540	125	14	11,0	16,50	25	3	146,20	**075**		
3/4-10	2,540	125	14	11,0	16,50	25	4			151,60	**075**
1-8	3,175	160	18	14,5	22,25	30	4	237,70	**100**		
1-8	3,175	160	18	14,5	22,25	30	5			254,10	**100**

P	**12**	**8**
M	**7**	**6**
K	**12**	
N		**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

UNC

UNI | FE-HF | VA

C 2–3

2B

TiN | TiCN

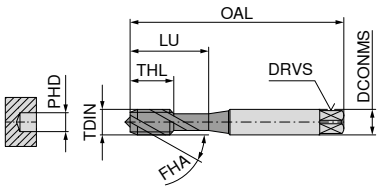

DIN 371 with reinforced shank

HSS-E
FHA 35°
≤ 1000 N/mm²
≤ 2,5xD

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

HSS-E
FHA 35°
≤ 1000 N/mm²
≤ 2,5xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 172 ... EUR T9		23 372 ... EUR T9		23 472 ... EUR T9	
Nr. 4-40	0,635	56	3,5	2,7	2,30	6	18	2	26,15	**004**			33,15	**004**
Nr. 4-40	0,635	56	3,5	2,7	2,30	11	18	2			27,44	**004**		
Nr. 6-32	0,794	56	4,0	3,0	2,85	7	20	3	24,08	**006**			31,08	**006**
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3			26,02	**006**		
Nr. 8-32	0,794	63	4,5	3,4	3,50	8	21	3	25,89	**008**			32,24	**008**
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3			27,57	**008**		
Nr. 10-24	1,058	70	6,0	4,9	3,90	10	25	3	26,81	**010**			33,54	**010**
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3			28,49	**010**		
1/4-20	1,270	80	7,0	5,5	5,20	13	30	3	34,58	**025**			37,66	**025**
1/4-20	1,270	80	7,0	5,5	5,20	17	30	3			38,44	**025**		
5/16-18	1,411	90	8,0	6,2	6,60	14	35	3	34,58	**031**			39,74	**031**
5/16-18	1,411	90	8,0	6,2	6,60	20	35	3			40,01	**031**		
3/8-16	1,588	100	10,0	8,0	8,00	16	39	3	42,34	**037**			44,39	**037**
3/8-16	1,588	100	10,0	8,0	8,00	22	39	3			47,64	**037**		



DIN 376 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 173 ... EUR T9	
7/16-14	1,814	100	8	6,2	9,40	18	3	53,60	**043**
1/2-13	1,954	110	9	7,0	10,75	20	3	56,57	**050**
5/8-11	2,309	110	12	9,0	13,50	22	3	69,65	**062**
3/4-10	2,540	125	14	11,0	16,50	25	3	105,40	**075**

P	**15**	**15**	**8**
M	**9**		**6**
K	**18**	**15**	
N	**12**	**24**	**22**
S			
H			
O			

Cutting speed v_c (m/min.)

6

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

DuoForm | UNC

EC
SN

C
2–3

2BX

TiN

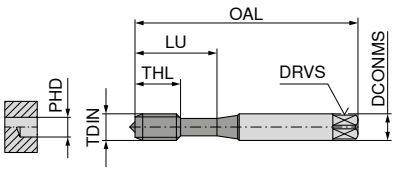

DIN 2174 with reinforced shank

HSS-E
≤ 1100 N/mm²
≤ 3xD

22 271 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
Nr. 4-40	0,635	56	3,5	2,7	2,55	11	18	3	81,17	**004**
Nr. 6-32	0,794	56	4,0	3,0	3,15	12	20	3	75,43	**006**
Nr. 8-32	0,794	63	4,5	3,4	3,80	13	21	4	75,43	**008**
Nr. 10-24	1,058	70	6,0	4,9	4,35	15	25	4	82,93	**010**
1/4-20	1,270	80	7,0	5,5	5,75	17	30	4	96,08	**025**
5/16-18	1,411	90	8,0	6,2	7,30	20	35	5	104,00	**031**
3/8-16	1,588	100	10,0	8,0	8,80	22	39	5	121,00	**037**

P	**18**
M	**10**
K	**10**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – machine taps for wire thread inserts, right hand

TruTap | EG UNC

UNI | B 4–5 | 2B mod | nitr. + vap.

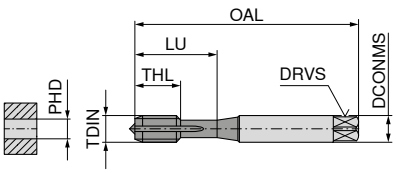

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 668 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
EG Nr. 4-40	0,635	63	4,5	3,4	3,1	13	21	3	72,14	**004**
EG Nr. 6-32	0,794	70	6,0	4,9	3,8	14	25	3	74,74	**006**
EG Nr. 8-32	0,794	80	6,0	4,9	4,4	16	30	3	71,75	**008**
EG Nr. 10-24	1,058	80	7,0	5,5	5,2	17	30	3	78,02	**010**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

6

Blind hole – machine taps for wire thread inserts, right hand

CavTap | EG UNC

UNI | E 1,5–2 | 2B mod | vap.

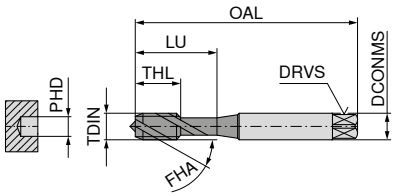

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 672 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
EG Nr. 4-40	0,635	63	4,5	3,4	3,1	7	21	3	73,09	**004**
EG Nr. 6-32	0,794	70	6,0	4,9	3,8	8	25	3	68,44	**006**
EG Nr. 8-32	0,794	80	6,0	4,9	4,4	8	30	3	72,68	**008**
EG Nr. 10-24	1,058	80	7,0	5,5	5,2	10	30	3	76,38	**010**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap SL | UNJC

Ti | C 2–3 | 3BX | TiCN

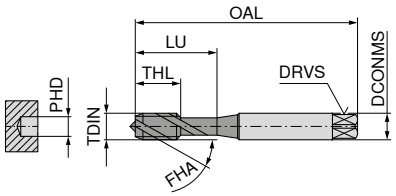

DIN 371 with reinforced shank

HSS-E
FHA 15°
≤ 1200 N/mm²
≤ 2xD

22 166 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
Nr. 4-40	0,635	56	3,5	2,7	2,30	11	18	2	96,08	**004**
Nr. 6-32	0,794	56	4,0	3,0	2,85	12	20	3	98,09	**006**
Nr. 8-32	0,794	63	4,5	3,4	3,50	13	21	3	96,75	**008**
Nr. 10-24	1,058	70	6,0	4,9	3,90	15	25	3	101,80	**010**
1/4-20	1,270	80	7,0	5,5	5,25	17	30	3	130,60	**025**
3/8-16	1,588	100	10,0	8,0	8,10	22	39	3	158,50	**037**

P	**7**
M	**7**
K	
N	**22**
S	**5**
H	
O	

Cutting speed v_c (m/min.)

6

Through hole – Machine taps, right hand

TruTap | UNF

UNI | B 4–5 | 2B | nitr. + vap.

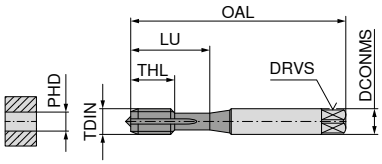

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 602 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
Nr. 4-48	0,529	56	3,5	2,7	2,40	11	18	2	66,81	**004**
Nr. 6-40	0,635	56	4,0	3,0	2,95	12	20	3	59,29	**006**
Nr. 8-36	0,706	63	4,5	3,4	3,50	13	21	3	59,29	**008**
Nr. 10-32	0,794	70	6,0	4,9	4,10	15	25	3	61,07	**010**
1/4-28	0,907	80	7,0	5,5	5,50	17	30	3	67,08	**025**
5/16-24	1,058	90	8,0	6,2	6,90	17	35	3	75,69	**031**

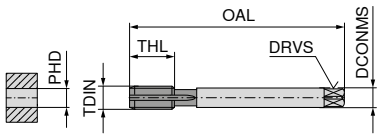

DIN 374 with reduced shank

22 603 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR U0	
7/16-20	1,270	100	8	6,2	9,90	22	3	90,32	**043**
1/2-20	1,270	100	9	7,0	11,50	22	3	86,09	**050**
9/16-18	1,411	100	11	9,0	12,90	22	3	132,70	**056**
5/8-18	1,411	100	12	9,0	14,50	22	3	121,00	**062**
3/4-16	1,588	110	14	11,0	17,50	25	4	153,10	**075**
7/8-14	1,814	125	18	14,5	20,50	25	4	199,50	**087**
1-12	2,117	140	18	14,5	23,25	28	4	258,20	**100**
1 1/8-12	2,117	150	22	18,0	26,50	28	4	679,10	**112**
1 1/4-12	2,117	150	22	18,0	29,75	28	4	744,70	**125**
1 3/8-12	2,117	170	28	22,0	33,00	30	5	784,30	**137**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – Machine taps, right hand

UNF

UNI

B
4–5

2B

TiN

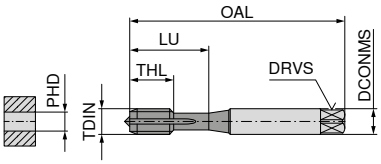

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 3xD

23 180 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR T9	
Nr. 10-32	0,794	70	6	4,9	4,1	15	25	3	27,96	**010**
1/4-28	0,907	80	7	5,5	5,5	17	30	3	35,73	**025**
5/16-24	1,058	90	8	6,2	6,9	17	35	3	39,74	**031**
3/8-24	1,058	90	10	8,0	8,5	18	35	4	43,38	**037**

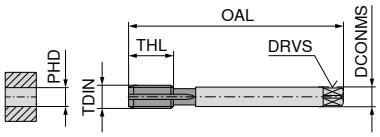

DIN 374 with reduced shank

23 181 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	EUR T9	
7/16-20	1,270	100	8	6,2	9,9	22	3	52,19	**043**
1/2-20	1,270	100	9	7,0	11,5	22	3	53,87	**050**
9/16-18	1,411	100	11	9,0	12,9	22	3	73,29	**056**
5/8-18	1,411	100	12	9,0	14,5	22	3	67,85	**062**
3/4-16	1,588	110	14	11,0	17,5	25	4	102,90	**075**

P	**15**
M	**9**
K	**18**
N	**12**
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | UNF

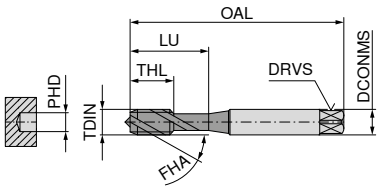

DIN 371 with reinforced shank

	VA	UNI	UNI
	E 1,5–2	C 2–3	E 1,5–2
	2B	2B	2B +0,05
	vap.	vap.	vap.
	HSS-E FHA 42° ≤ 900 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD	HSS-E FHA 42° ≤ 1100 N/mm² ≤ 3xD
	22 308 ...	**22 606 ...**	**22 307 ...**
	EUR U0	EUR U0	EUR U0

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes							
Nr. 2-64	0,397	45	2,8	2,1	1,85	4,5	12	2	81,98	**002**					
Nr. 4-48	0,529	56	3,5	2,7	2,40	6,0	18	2	61,76	**004**					
Nr. 6-40	0,635	56	4,0	3,0	2,95	7,0	20	3	59,29	**006**					
Nr. 6-40	0,635	56	4,0	3,0	3,00	7,0	20	3					82,93	**006**	
Nr. 8-36	0,706	63	4,5	3,4	3,50	8,0	21	3	59,29	**008**					
Nr. 10-32	0,794	70	6,0	4,9	4,10	10,0	25	3	63,40	**010**	55,46	**010**			
Nr. 10-32	0,794	70	6,0	4,9	4,15	10,0	25	3					87,72	**010**	
1/4-28	0,907	80	7,0	5,5	5,50	10,0	30	3	65,17	**025**	60,67	**025**			
1/4-28	0,907	80	7,0	5,5	5,55	10,0	30	3					91,83	**025**	
5/16-24	1,058	90	8,0	6,2	6,90	10,0	35	3	72,68	**031**	68,44	**031**			
5/16-24	1,058	90	8,0	6,2	6,95	10,0	35	3					104,50	**031**	
3/8-24	1,058	90	10,0	8,0	8,50	10,0	35	3	76,10	**037**					
3/8-24	1,058	90	10,0	8,0	8,55	10,0	35	3					104,50	**037**	



DIN 374 with reduced shank

								22 607 ...		22 409 ...	
								EUR U0		EUR U0	
TDIN	**TP mm**	**OAL mm**	**DCONMS mm**	**DRVS mm**	**PHD mm**	**THL mm**	**Flutes**				
7/16-20	1,270	100	8	6,2	9,90	13	3	86,09	**043**		
7/16-20	1,270	100	8	6,2	9,95	13	4			132,10	**043**
1/2-20	1,270	100	9	7,0	11,50	13	4	86,09	**050**		
1/2-20	1,270	100	9	7,0	11,55	13	5			127,10	**050**
9/16-18	1,411	100	11	9,0	12,90	15	4	129,40	**056**		
9/16-18	1,411	100	11	9,0	12,95	15	5			180,40	**056**
5/8-18	1,411	100	12	9,0	14,50	15	4	113,40	**062**		
5/8-18	1,411	100	12	9,0	14,55	15	5			164,00	**062**
3/4-16	1,588	110	14	11,0	17,50	17	4	155,80	**075**		
3/4-16	1,588	110	14	11,0	17,55	17	5			221,40	**075**
1-12	2,117	140	18	14,5	23,30	20	5			347,10	**100**

P	**8**	**12**	**12**
M	**6**	**7**	**7**
K		**12**	**12**
N	**22**		**22**
S			
H			
O			

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap SL | UNF

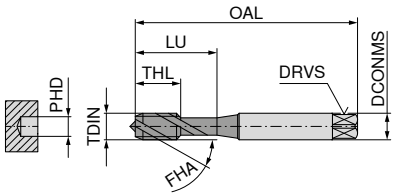

DIN 371 with reinforced shank

	Ti	Ti
	C 2–3	C 2–3
	2BX	3BX
	vap.	vap.
	HSS-PM FHA 30° ≤ 1400 N/mm² ≤ 1,5xD	HSS-PM FHA 30° ≤ 1400 N/mm² ≤ 1,5xD
	22 302 ...	**22 303 ...**
	EUR U0	EUR U0

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes				
Nr. 10-32	0,794	70	6	4,9	4,1	10	25	3	115,30	**010**	115,30	**010**
1/4-28	0,907	80	7	5,5	5,5	10	30	3	125,30	**025**	125,30	**025**
5/16-24	1,058	90	8	6,2	6,9	10	35	3	149,00	**031**	135,40	**031**
3/8-24	1,058	90	10	8,0	8,5	10	35	3	147,60	**037**	147,60	**037**

P	**5**	**5**
M	**5**	**5**
K		
N	**22**	**22**
S	**3**	**3**
H		
O		

Cutting speed v_c (m/min.)

6

Blind hole – Machine taps, right hand

UNF

UNI

C
2–3

2B

TiN

VA

C
2–3

2B

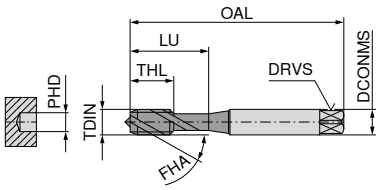

DIN 371 with reinforced shank

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

HSS-E
FHA 35°
≤ 1100 N/mm²
≤ 2,5xD

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	23 182 ... EUR T9		23 482 ... EUR T9	
Nr. 10-32	0,794	70	6	4,9	4,1	10	25	3	29,53	**010**	39,34	**010**
1/4-28	0,907	80	7	5,5	5,5	10	30	3	37,80	**025**	42,98	**025**
5/16-24	1,058	90	8	6,2	6,9	10	35	3	40,01	**031**	45,57	**031**
3/8-24	1,058	90	10	8,0	8,5	10	35	3	44,54	**037**	49,44	**037**



DIN 374 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	23 183 ... EUR T9		23 483 ... EUR T9	
7/16-20	1,270	100	8	6,2	9,9	13	3	53,60	**043**	61,50	**043**
1/2-20	1,270	100	9	7,0	11,5	13	4	56,57	**050**	62,00	**050**
9/16-18	1,411	100	11	9,0	12,9	15	4	76,38	**056**	87,01	**056**
5/8-18	1,411	100	12	9,0	14,5	15	4	69,13	**062**	76,38	**062**
3/4-16	1,588	110	14	11,0	17,5	17	4	109,70	**075**	103,30	**075**

P	**15**	**8**
M	**9**	**6**
K	**18**	
N	**12**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine thread formers, right hand

▲ SN = Thread formers with lubrication grooves

DuoForm | UNF

EC
SN

C
2–3

2BX

TiN

HSS-E
≤ 1100 N/mm²
≤ 3xD

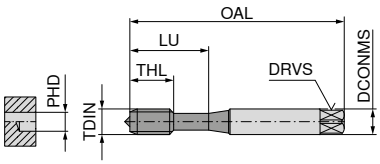

DIN 2174 with reinforced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	22 312 ... EUR U0	
Nr. 4-48	0,529	56	3,5	2,7	2,62	11	18	3	90,16	**004**
Nr. 6-40	0,635	56	4,0	3,0	3,22	12	20	3	83,75	**006**
Nr. 8-36	0,706	63	4,5	3,4	3,85	13	21	4	85,93	**008**
Nr. 10-32	0,794	70	6,0	4,9	4,45	15	25	4	92,90	**010**
1/4-28	0,907	80	7,0	5,5	5,95	17	30	4	109,00	**025**

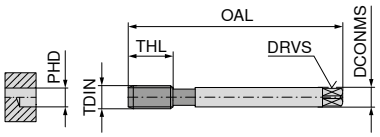

DIN 2174 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	Flutes	22 313 ... EUR U0	
7/16-20	1,27	100	8	6,2	10,55	22	6	162,70	**043**
1/2-20	1,27	100	9	7,0	12,15	22	6	166,70	**050**

P	**18**
M	**10**
K	**10**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole – machine taps for wire thread inserts, right hand

TruTap | EG UNF

UNI | B 4–5 | 2B | nitr. + vap.

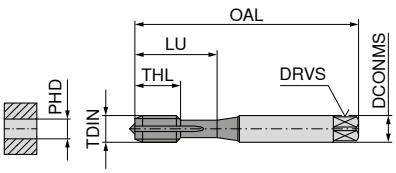

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²
≤ 4xD

22 676 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
EG Nr. 4-48	0,529	56	4	3,0	3,0	9	20	3	93,60	**004**
EG Nr. 6-40	0,635	70	6	4,9	3,7	11	25	3	90,32	**006**
EG Nr. 8-36	0,706	80	6	4,9	4,4	13	30	3	90,32	**008**
EG Nr. 10-32	0,794	80	6	4,9	5,1	13	30	3	96,08	**010**
EG 1/4-28	0,907	90	8	6,2	6,6	17	35	3	102,60	**025**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – machine taps for wire thread inserts, right hand

CavTap | EG UNF

UNI | E 1,5–2 | 2B | vap.

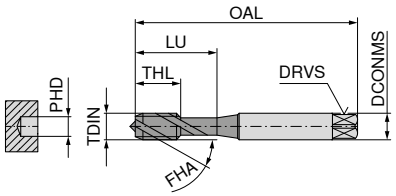

DIN 371 with reinforced shank

HSS-E
FHA 42°
≤ 1100 N/mm²
≤ 3xD

22 680 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	PHD mm	THL mm	LU mm	Flutes	EUR U0	
EG Nr. 4-48	0,529	56	4	3,0	3,0	7	20	3	87,72	**004**
EG Nr. 6-40	0,635	70	6	4,9	3,7	8	25	3	87,05	**006**
EG Nr. 8-36	0,706	80	6	4,9	4,4	8	30	3	91,00	**008**
EG Nr. 10-32	0,794	80	6	4,9	5,1	8	30	3	96,08	**010**
EG 1/4-28	0,907	90	8	6,2	6,6	10	35	3	105,30	**025**

P	**12**
M	**7**
K	**12**
N	
S	
H	
O	

Cutting speed v_c (m/min.)

Blind hole – Machine taps, right hand

CavTap | NPT

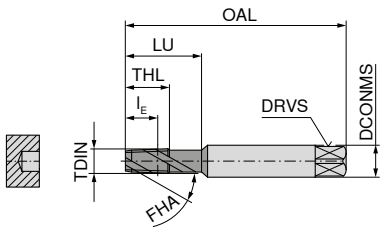

DIN 371 with reinforced shank

VA | C | 2–3 | vap.

HSS-E
FHA 35°
≤ 900 N/mm²

VA | E | 1,5–2 | TiN

HSS-E
FHA 42°
≤ 1100 N/mm²

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	l_E mm	THL mm	LU mm	Flutes	22 364 ... EUR U0		22 365 ... EUR U0	
1/16-27	0,941	90	8	6,2	9,24	13,0	26,0	3	119,40	**006**		
1/8-27	0,941	90	10	8,0	9,28	13,0	26,0	3	138,00	**012**		
1/8-27	0,941	90	10	8,0	9,28	12,0	26,0	4			180,40	**012**
1/4-18	1,411	100	14	11,0	13,55	19,5	34,5	3	161,20	**025**		
1/4-18	1,411	100	14	11,0	13,55	18,0	34,5	4			184,50	**025**



DIN 374 with reduced shank

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	l_E mm	THL mm	Flutes	22 371 ... EUR U0		22 372 ... EUR U0	
3/8-18	1,411	110	14	11	13,86	18,0	5			299,30	**037**
3/8-18	1,411	110	14	11	13,86	19,5	3	198,20	**037**		
1/2-14	1,814	140	16	12	18,11	23,0	5			423,60	**050**
1/2-14	1,814	140	16	12	18,11	25,0	5	288,30	**050**		
3/4-14	1,814	150	20	16	18,59	26,0	5	388,00	**075**		

P	**4**	**5**
M	**3**	**4**
K		
N	**22**	**22**
S		
H		
O		

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

DuoTap | NPT

VG

C
2–3

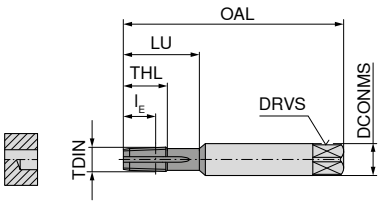

DIN 371 with reinforced shank

HSS-E
FHA 0°
≤ 1100 N/mm²

6

22 374 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	l_E mm	THL mm	LU mm	Flutes	EUR U0	
1/16-27	0,941	90	8	6,2	9,24	13,0	26,0	3	86,09	**006**
1/8-27	0,941	90	10	8,0	9,28	13,0	26,0	3	111,90	**012**
1/4-18	1,411	100	14	11,0	13,55	19,5	34,5	3	118,50	**025**



DIN 374 with reduced shank

22 375 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	l_E mm	THL mm	Flutes	EUR U0	
3/8-18	1,411	110	14	11	13,86	19,5	3	147,60	**037**
1/2-14	1,814	140	16	12	18,11	25,0	5	198,20	**050**
3/4-14	1,814	150	20	16	18,59	26,0	5	255,60	**075**
1-11,5	2,209	170	25	20	22,31	30,0	5	349,70	**100**

P	**4**
M	
K	**6**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Through hole / Blind hole – Machine taps, right hand

▲ ES = extra short

DuoTap | NPT

ST
ES

C
2–3

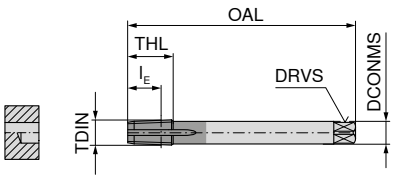

DIN 2181 with reduced shank



HSS-E
FHA 0°
≤ 750 N/mm²

22 361 ...

TDIN	TP mm	OAL mm	DCONMS mm	DRVS mm	l_E mm	THL mm	Flutes	EUR U0	
1/16-27	0,941	63	6	4,9	9,24	13,0	4	73,37	**006**
1/8-27	0,941	63	7	5,5	9,28	13,0	5	77,20	**012**
1/4-18	1,411	63	11	9,0	13,55	19,5	5	91,83	**025**
3/8-18	1,411	70	12	9,0	13,86	19,5	5	115,30	**037**
1/2-14	1,814	80	16	12,0	18,11	23,0	5	154,50	**050**
3/4-14	1,814	100	20	16,0	18,59	26,0	6	194,00	**075**
1-11,5	2,209	110	25	20,0	22,31	32,0	6	289,50	**100**

P	**6**
M	
K	**6**
N	**22**
S	
H	
O	

Cutting speed v_c (m/min.)

Shank extensions for taps



20 450 ...

DIN 371	DIN 374 / 376	DCONWS mm	a_1 mm	LSC mm	BD mm	LS mm	OAL mm	DRVS mm	DCONMS mm	EUR U0	
M3	M4,5 - M5	3,5	2,7	23	7,5	60	130	4,9	6	337,60	**020**
M3,5	M5,5	4,0	3,0	23	8,4	60	130	4,9	6	399,10	**030**
M4	M6	4,5	3,4	23	8,4	60	130	4,9	6	399,10	**040**
M4,5 - M6	M8	6,0	4,9	26	12,1	60	130	5,5	7	403,10	**050**
M7	M9 - M10	7,0	5,5	26	12,1	60	130	5,5	7	430,30	**060**
M8	M11	8,0	6,2	30	13,0	60	130	6,2	8	418,10	**070**
M9	M12	9,0	7,0	31	15,0	60	130	7,0	9	418,10	**080**
M10		10,0	8,0	33	15,0	60	130	8,0	10	459,10	**090**
	M14	11,0	9,0	36	18,0	90	180	9,0	11	613,50	**100**
(M12)	M16	12,0	9,0	36	18,0	90	180	9,0	12	613,50	**110**

Core hole diameters for taper threads (taper 1:16)

Pre-drilling of cylindrical holes without reamer



		NPT		NPTF				Rc	
Ø D inch	P Gg/1"	Ø D_1 mm	t_1 min. mm	Ø D_1 mm	t_1 min. mm	Ø D inch	P Gg/1"	Ø D_1 mm	t_1 min. mm
1/16	27	6,15	12	6,1	12	1/16	28	6,2	11,9
1/8	27	8,5	12	8,45	12	1/8	28	8,2	11,9
1/4	18	11	17,5	10,9	17,5	1/4	19	10,85	16,3
3/8	18	14,5	17,6	14,3	17,6	3/8	19	14,5	18,1
1/2	14	17,85	22,9	17,6	22,9	1/2	14	18	24
3/4	14	23,2	23	23	23	3/4	14	23,5	25,3
1	11½	29,5	27,4	28,75	27,4	1	11	29,5	30,6
1¼	11½	37,8	28,1	37,5	28,1				
1½	11½	44	28,4	43,75	28,4				
2	11½	56	28,4	55,75	28,4				

P = Pitch

Pre-drilling of cylindrical holes and conical boring with reamer



Taper 1:16

		NPT			NPTF		
Ø D inch	P Gg/1"	Ø D_2 mm	Ø D_3 mm	t_1 min. mm	Ø D_2 mm	Ø D_3 mm	t_1 min. mm
1/16	27	5,95	6,39	12	5,95	6,41	12
1/8	27	8,25	8,74	12	8,25	8,76	12
1/4	18	10,75	11,36	17,5	10,75	11,4	17,5
3/8	18	14,1	14,8	17,6	14,1	14,84	17,6
1/2	14	17,5	18,32	22,9	17,5	18,33	22,9
3/4	14	22,7	23,67	23	22,7	23,68	23
1	11½	28,6	29,69	27,4	28,6	29,72	27,4
1¼	11½	37,3	38,45	28,1	37,3	38,48	28,1
1½	11½	43,4	44,52	28,4	43,4	44,5	28,4
2	11½	55,5	56,56	28,4	55,5	56,59	28,4

		Rc		
Ø D inch	P Gg/1"	Ø D_2 mm	Ø D_3 mm	t_1 min. mm
1/16	28	6,1	6,56	11,9
1/8	28	8,1	8,57	11,9
1/4	19	10,75	11,45	17,7
3/8	19	14,25	14,95	18,1
1/2	14	17,75	18,63	24
3/4	14	23	24,12	25,3
1	11	29	30,29	30,6

P = Pitch

Recommendation for the pre-drilling of blind hole threads



Taper 1:16

		NPT				NPTF			
Ø D inch	P Gg/1"	Ø D_3 mm	b mm	t_2 min. mm	Ø D_4 min. mm	Ø D_3 mm	b mm	t_2 min. mm	Ø D_4 min. mm
1/16	27	6,39	7	10	7,6	6,41	8	11	7,4
1/8	27	8,74	7	10	10	8,76	8	11	9,8
1/4	18	11,36	10,2	14,5	13,1	11,4	11,6	15,5	12,9
3/8	18	14,8	10,6	15	16,5	14,84	12	16	16,3
1/2	14	18,32	13,8	19	20,5	18,33	15,6	20,5	20,3
3/4	14	23,67	14,2	20	25,8	23,68	16	21,5	25,6
1	11½	29,69	17	24	32,2	29,72	19,2	26	32
1¼	11½	38,45	17,5	24,5	41	38,48	19,7	26,5	40,8
1½	11½	44,52	17,5	24,5	47,2	44,5	19,7	26,5	47
2	11½	56,56	18	25	59,2	56,59	20,2	27	59

		Rc			
Ø D inch	P Gg/1"	Ø D_3 mm	b mm	t_2 min. mm	Ø D_4 min. mm
1/16	28	6,56	5,6	9,5	7,6
1/8	28	8,57	5,6	9,5	9,6
1/4	19	11,45	8,4	14	13
3/8	19	14,95	8,8	14,4	16,5
1/2	14	18,63	11,4	19	20,6
3/4	14	24,12	12,7	20,3	26
1	11	30,29	14,5	24,3	32,8

P = Pitch

Tapped hole pilot diameter

M ISO metric coarse threads 6H to DIN 13 and DIN ISO 965-1 (M1-M1,4 = 5H)



Thread nominal Ø		Ø D_1		Core hole	Thread nominal Ø		Ø D_1		Core hole
D	P	min.	max.		D	P	min.	max.	
M1	0,25	0,729	0,785	0,75	M12	1,75	10,106	10,441	10,2
M1,1	0,25	0,829	0,885	0,85	M14	2	11,835	12,210	12
M1,2	0,25	0,929	0,985	0,95	M16	2	13,835	14,210	14
M1,4	0,3	1,075	1,142	1,1	M18	2,5	15,294	15,744	15,5
M1,6	0,35	1,221	1,321	1,25	M20	2,5	17,294	17,744	17,5
M1,8	0,35	1,421	1,521	1,45	M22	2,5	19,294	19,744	19,5
M2	0,4	1,567	1,679	1,6	M24	3	20,752	21,252	21
M2,2	0,45	1,713	1,838	1,75	M27	3	23,752	24,252	24
M2,5	0,45	2,013	2,138	2,05	M30	3,5	26,211	26,771	26,5
M3	0,5	2,459	2,599	2,5	M33	3,5	29,211	29,771	29,5
M3,5	0,6	2,850	3,01	2,9	M36	4	31,67	32,270	32
M4	0,7	3,242	3,422	3,3	M39	4	34,67	35,270	35
M4,5	0,75	3,688	3,878	3,7	M42	4,5	37,129	37,799	37,5
M5	0,8	4,134	4,334	4,2	M45	4,5	40,129	40,799	40,5
M6	1	4,917	5,153	5	M48	5	42,587	43,297	43
M7	1	5,917	6,153	6	M52	5	46,587	47,297	47
M8	1,25	6,647	6,912	6,8	M56	5,5	50,046	50,796	50,5
M9	1,25	7,647	7,912	7,8	M60	5,5	54,046	54,796	54,5
M10	1,5	8,376	8,676	8,5	M64	6	57,505	58,305	58
M11	1,5	9,376	9,676	9,5	M68	6	61,505	62,305	62

MF ISO metric fine threads 6H to DIN 13 and DIN ISO 965-1



Thread nominal Ø			Ø D_1		Core hole	Thread nominal Ø			Ø D_1		Core hole
D	x	P	min.	max.		D	x	P	min.	max.	
M2	x	0,25	1,729	1,774	1,75	M20	x	1,0	18,917	19,153	19
M2,2	x	0,25	1,929	1,974	1,95	M20	x	1,5	18,376	18,676	18,5
M2,5	x	0,35	2,121	2,221	2,15	M20	x	2,0	17,835	18,210	18
M3	x	0,35	2,621	2,721	2,65	M24	x	1,5	22,376	22,676	22,5
M3,5	x	0,35	3,121	3,221	3,15	M30	x	2,0	27,835	28,210	28
M4	x	0,35	3,621	3,721	3,65	M36	x	1,5	34,376	34,676	34,5
M4	x	0,5	3,459	3,599	3,5	M36	x	3,0	32,752	33,252	33
M4,5	x	0,5	3,959	4,099	4	M42	x	2,0	39,835	40,210	40
M5	x	0,5	4,459	4,599	4,5	M48	x	1,5	46,376	46,676	46,5
M6	x	0,5	5,459	5,599	5,5	M48	x	3,0	44,752	45,252	45
M6	x	0,75	5,188	5,378	5,2	M48	x	4,0	43,67	44,270	44
M8	x	0,75	7,188	7,378	7,2	M56	x	1,5	54,376	54,676	54,5
M8	x	1,0	6,917	7,153	7	M56	x	2,0	53,835	54,210	54
M10	x	0,75	9,188	9,378	9,2	M56	x	3,0	52,752	53,252	53
M10	x	1,0	8,917	9,153	9	M56	x	4,0	51,670	52,270	52
M10	x	1,25	8,647	8,912	8,8	M64	x	3,0	60,752	61,252	61
M12	x	1,0	10,917	11,153	11	M64	x	4,0	59,670	60,270	60
M12	x	1,5	10,376	10,676	10,5	M72	x	4,0	67,670	68,270	68
M14	x	1,25	12,647	12,912	12,8	M80	x	6,0	73,505	74,305	74
M16	x	1,0	14,917	15,153	15	M95	x	6,0	88,505	89,305	89
M16	x	1,5	14,376	14,676	14,5	M110	x	6,0	103,505	104,305	104

Dimensions in mm; P=Pitch

Thread former pilot hole diameter

M ISO metric coarse threads 6H to DIN 13 and DIN ISO 965-1 (M1-M1,4 = 5H)



Thread nominal Ø		Ø D_1		Core hole
D	P	min.	max.	
M1	0,25	0,89		0,9
M1,2	0,25	1,09		1,1
M1,4	0,3	1,26		1,28
M1,6	0,35	1,45		1,47
M1,8	0,35	1,65		1,67
M2	0,4	1,83	1,86	1,85
M2,2	0,45	2	2,04	2,03
M2,5	0,45	2,3	2,34	2,33
M3	0,5	2,77	2,82	2,8
M3,5	0,6	3,23	3,28	3,25
M4	0,7	3,68	3,73	3,7
M4,5	0,75	4,15	4,21	4,2
M5	0,8	4,63	4,68	4,65

Thread nominal Ø		Ø D_1		Core hole
D	P	min.	max.	
M6	1	5,51	5,59	5,6
M7	1	6,51	6,59	6,6
M8	1,25	7,39	7,48	7,45
M9	1,25	8,39	8,48	8,45
M10	1,5	9,25	9,35	9,35
M11	1,5	10,25	10,35	10,35
M12	1,75	11,12	11,25	11,25
M14	2	13	13,15	13,1
M16	2	15	15,15	15,1
M18	2,5	16,72	16,9	16,85
M20	2,5	18,72	18,9	18,85
M22	2,5	20,72	20,9	20,85
M24	3	22,46	22,7	22,65

MF ISO metric fine threads 6H to DIN 13 and DIN ISO 965-1



Thread nominal Ø			Ø D_1		Core hole
D	x	P	min.	max.	
M2	x	0,25	1,89		1,9
M2,2	x	0,25	2,09		2,1
M2,5	x	0,25	2,39		2,4
M2,5	x	0,35	2,35		2,37
M3	x	0,25	2,89		2,9
M3	x	0,35	2,85		2,88
M3,5	x	0,35	3,35		3,38
M3,5	x	0,5	3,27	3,32	3,3
M4	x	0,35	3,85		3,88
M4	x	0,5	3,77	3,82	3,8
M4,5	x	0,5	4,27	4,32	4,3
M5	x	0,5	4,77	4,82	4,8
M5	x	0,75	4,65	4,71	4,7
M5,5	x	0,5	5,27	5,32	5,3
M6	x	0,5	5,78	5,83	5,8
M6	x	0,75	5,65	5,71	5,7
M7	x	0,5	6,78	6,83	6,8
M7	x	0,75	6,65	6,71	6,7
M8	x	0,5	7,78	7,83	7,8
M8	x	0,75	7,65	7,71	7,7
M8	x	1,0	7,51	7,59	7,6
M9	x	0,5	8,78	8,83	8,8
M9	x	0,75	8,65	8,71	8,7
M9	x	1,0	8,51	8,59	8,6
M10	x	0,5	9,78	9,83	9,8
M10	x	0,75	9,65	9,71	9,7
M10	x	1,0	9,51	9,59	9,6
M10	x	1,25	9,39	9,48	9,45
M11	x	0,75	10,65	10,71	10,7
M11	x	1,0	10,51	10,59	10,6
M12	x	0,75	11,66	11,72	11,7

Thread nominal Ø			Ø D_1		Core hole
D	x	P	min.	max.	
M12	x	1,0	11,52	11,6	11,6
M12	x	1,25	11,4	11,49	11,45
M12	x	1,5	11,26	11,36	11,35
M13	x	0,75	12,66	12,72	12,7
M13	x	1,0	12,52	12,6	12,6
M13	x	1,5	12,26	12,36	12,35
M14	x	0,75	13,66	13,72	13,7
M14	x	1,0	13,52	13,6	13,6
M14	x	1,25	13,4	13,49	13,45
M14	x	1,5	13,26	13,36	13,35
M15	x	0,75	14,66	14,72	14,7
M15	x	1,0	14,52	14,6	14,6
M15	x	1,5	14,26	14,36	14,35
M16	x	0,75	15,66	15,72	15,7
M16	x	1,0	15,52	15,6	15,6
M16	x	1,5	15,26	15,36	15,35
M18	x	1,0	17,52	17,6	17,6
M18	x	1,5	17,26	17,36	17,35
M18	x	2,0	17	17,15	17,1
M20	x	1,0	19,52	19,6	19,6
M20	x	1,5	19,26	19,36	19,35
M20	x	2,0	19	19,15	19,1
M22	x	1,5	21,26	21,36	21,35
M22	x	2,0	21	21,15	21,1
M24	x	1,5	23,26	23,38	23,35
M24	x	2,0	23,01	23,16	23,1
M25	x	1,5	24,26	24,38	24,35
M26	x	1,5	25,26	25,38	25,35
M27	x	2,0	26,01	26,16	26,1
M28	x	1,5	27,26	27,38	27,35
M30	x	1,5	29,26	29,38	29,35
M30	x	2,0	29,01	29,16	29,1

Dimensions in mm; P=Pitch

Thread tolerances and recommended manufacturing tolerances

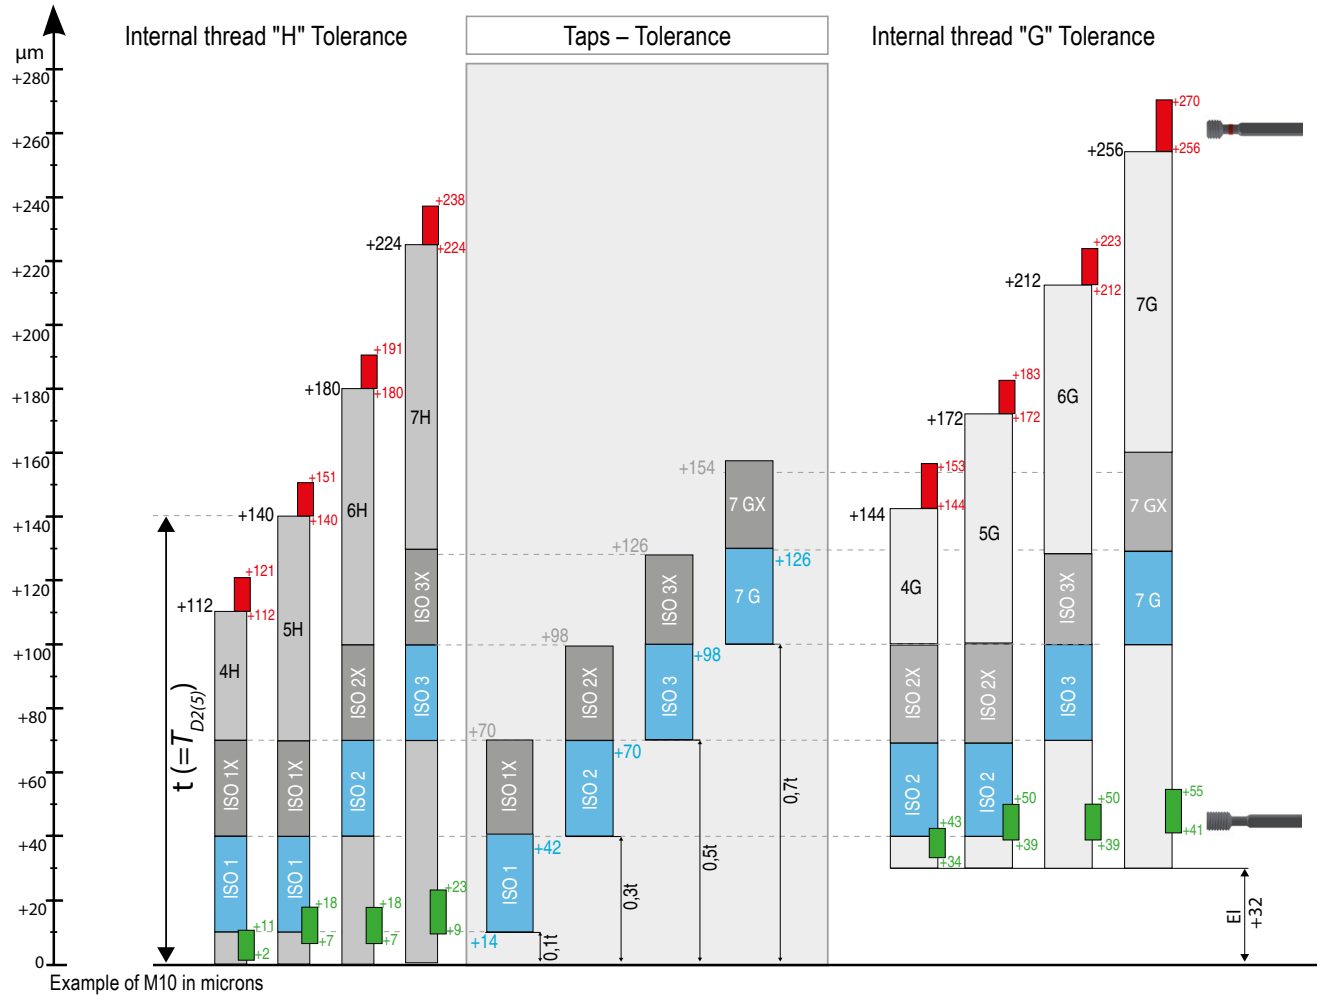

Workpieces to be plated require oversize taps.
The interference depends on the coating thickness and the flank angle.

at

60° Flank angle	Oversize = 4 x coating thickness
55° Flank angle	Oversize = 4.331 x coating thickness
30° Flank angle	Oversize = 7.727 x coating thickness

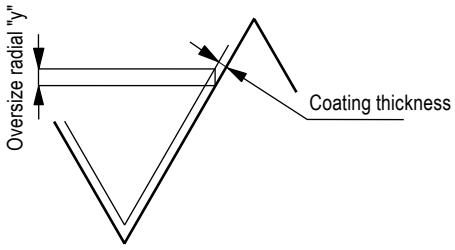

Application class of the tap Designation according to		Tolerance class of the internal thread to be cut				
DIN	ISO					
4H	ISO1	4H	5H	–	–	–
6H	ISO2	4G	5G	6H	–	–
6G	ISO3	–	(4E)	6G	7H	8H
7G	–	–	–	(6E)	7G	8G

For special applications, e.g. abrasive cast iron materials or plastics other dimensions have to be chosen which are determined on previous experience. In such cases an „X“ is added to the short designation of the tolerance, e.g. ISO 2X, however the tolerance zone assignment may be limited (6HX for tolerance zone 6H and 5G). In addition it should be taken into account that the dimensions of the internal thread do not only depend on the dimensions of the tap but on the material to be machined and all production conditions.
For first taps and intermediate taps no thread dimensions are determined.

Thread formers

DuoForm thread forming taps for cold-formable materials up to 1400 N/mm² or at least 5 % elongation.
The thread is produced by plastic deformation. The molded thread has very high strength.

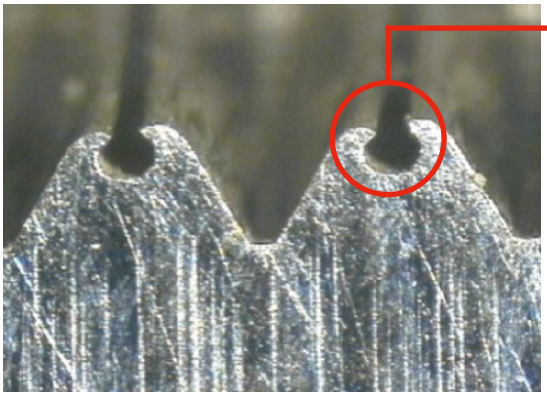

Important

Prior to forming a thread, you should ensure that a molded thread is acceptable. In certain sectors, the forming of a thread is **not** permitted. Dirt or bacteria can settle in the formed crown.

Incremental pressure forming

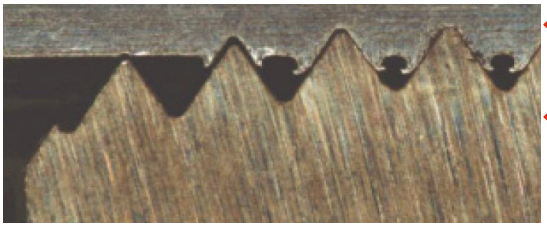

Workpiece

Thread formers

The thread profile is pressed gradually into the material via the start (leading edge) of the tap.

Properties

- One type can be used in different materials
- For through and blind holes
- Very good thread surface quality
- High static and dynamic strength thread
- Secure machining of deep and counterbored threads
- Short machining times
- No chip problems
- No swarf
- High process security
- HSS-E and HSS-PM taps for materials up to 33 HRC with a minimum elongation of 5 %

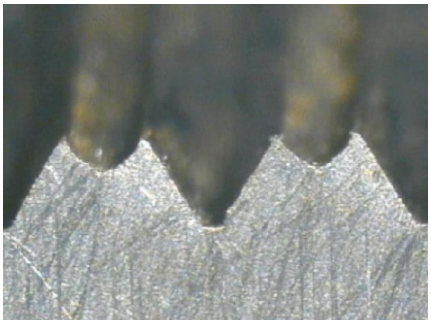

Underformed – core hole too large

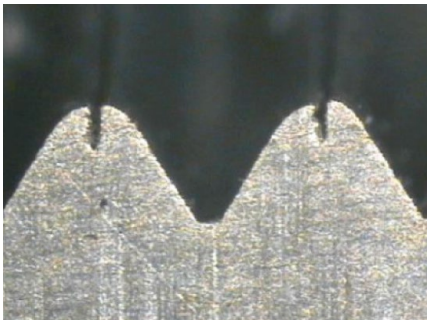

Overformed – core hole too small

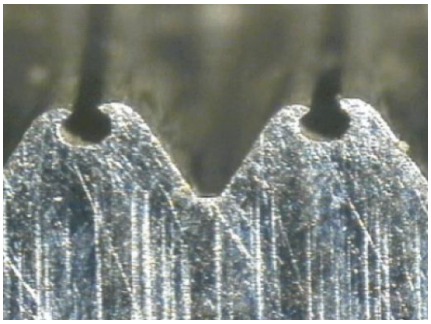

Perfect form – Core hole correct

Troubleshooting

Poor tool life

Cause

- Overload fractures of the cutting edge on the lead
- Hardness or tool material not suitable for the application
- Core hole too small, or work hardened
- Insufficient lubrication or incorrect application parameters

Remedy

- A longer lead or more flutes for the same lead length, giving a greater number of cutting teeth
- In reground tools the hardness can be reduced, apply correct parameters for regrinding
- Increase frequency of changes or regrinding of the drill
- Use the correct operating parameters for drilling
- Select the correct lubricant and ensure adequate supply

Axial thread error

Cause

- Selected geometry is not suitable
- Spindle speed is wrong compared with feed (synchronisation error)
- Blind hole taps are used with high feed pressure
- Through hole taps are used with low feed pressure

Remedy

- Check programming and pitch control or machine synchronisation
- Use tapping chuck with length compensation
- Increase retraction feed pessure
- Increase feed pessure

Oversize thread

Cause

- Thread tolerances of tool and thread gauge do not match
- Burred tool edges after regrinding
- Cold pressure welding

Remedy

- Check the correct tolerances for tool and thread gauge
- Carefully deburr
- Use appropriate (positive) geometry
- Reduce cutting speed
- Use different surface treatment or coating
- Use tapping chuck with length compensation
- Use appropriate lubricant

Broken tool

Cause

- Tool is worn
- Tool has hit the bottom of the hole
- Weld deposits
- Core hole too small
- Chip trapping
- Incorrect cutting speed
- Chip trapping in the flute
- Insufficient cooling / lubrication

Remedy

- Employ set taps
- Use a tool with lower helix
- Use tools with a shorter / longer lead
- Check the pre-drilling depth and the thread depth
- Drill core hole deeper
- Correct cutting speed
- Use a different coating or surface treatment
- Use tool holder with length compensation
- Use suitable lubricant
- Use correct core hole
- Change geometry and / or flute type
- Note chip shape and chip formation

Coatings

vap.
- Vaporised
- Vaporisation (vapour-deposition) prevents cold welds from forming on the tool and increases the surface hardness and thus the wear resistance

nitr.
- Nitrided
- Nitriding increases wear resistance and offers low friction properties

vap. + nitr.
- Vaporized + Nitrated
- Combination of increased surface hardness and lubricant carrier

TiN
- TiN coating
- Maximum application temperature: 450 °C

TiN GS
- Titanium nitride low friction layer
- High wear resistance with low friction properties
- Maximum application temperature: 450 °C

TiCN
- TiCN multilayer coating
- Maximum application temperature: 450 °C

DLC
- Diamond-like carbon coating
- Specifically for machining non-ferrous metals
- Maximum application temperature: 400 °C

Ti200
- TiN coating
- Well suited for high cutting speeds during thread forming
- Maximum application temperature: 450 °C

OSM
- Hard material layer and anti-friction layer
- For use in high-strength steels

CH
- Amorphous carbon layer
- For use in non-ferrous metals or aluminum
- Reduces the material adhesion

HCr
- Hard chromed
- For use in non-ferrous metals or aluminum
- Very low surface roughness

CrN
- Chromium-nitrogen coating
- Very wear-resistant coating
- Especially suitable for use in aluminum, but also for P, M and S materials

AlTiN-HD
- AlTiN-based nanolayer hard material coating
- Maximum application temperature: 500 °C

New products for machining technicians

NEW Polygon system extension

Milling insert for part-off → Page 15

- ▲ Reliable cutting with groove depths up to 11.5 mm in almost all materials
- ▲ Longest service lives with maximum process security
- ▲ Different diameters with groove width of 1.5 mm available from stock

Thread milling insert partial profile → Page 16

- ▲ Extension of the existing 50 882 range to include the thread pitch 3.5–6 mm

NEW MiniMill XL multipurpose milling system

Milling insert → Page 28
Tool holder → Page 33

- ▲ Extension of the tried-and-tested MiniMill multipurpose milling system Ø 37 mm by Ø 50 mm
- ▲ Reliable cutting with groove depths up to 16.5 mm in almost all materials
- ▲ Cross-pitched versions for significantly greater self-cleaning effect with lower chip jamming tendency
- ▲ Wide range of groove widths and holders available from stock

NEW Performance Thread milling cutter Type SFSE

→ Page 63–66

- ▲ Multi-row shank thread milling cutter with countersink cutting edge
- ▲ Universal application in almost all materials
- ▲ 2-in-1 tool: thread milling and countersinking with a single tool
- ▲ Maximum reliability and process security
- ▲ Unsurpassed price-performance ratio

NEW Performance Thread milling cutter Type SGF

→ Page 71+72

- ▲ Multi-row shank thread milling cutter
- ▲ Universal application in almost all materials
- ▲ Maximum reliability and process security
- ▲ Unsurpassed price-performance ratio

NEW Shank thread milling cutter type HR



→ Page 60

- ▲ Single-row shank thread milling cutter with universal application, but with focus on hard machining
- ▲ Outstanding solution for high lateral forces during machining
  → absolutely cylindrical, true-to-gauge and dimensionally accurate threads of the highest quality

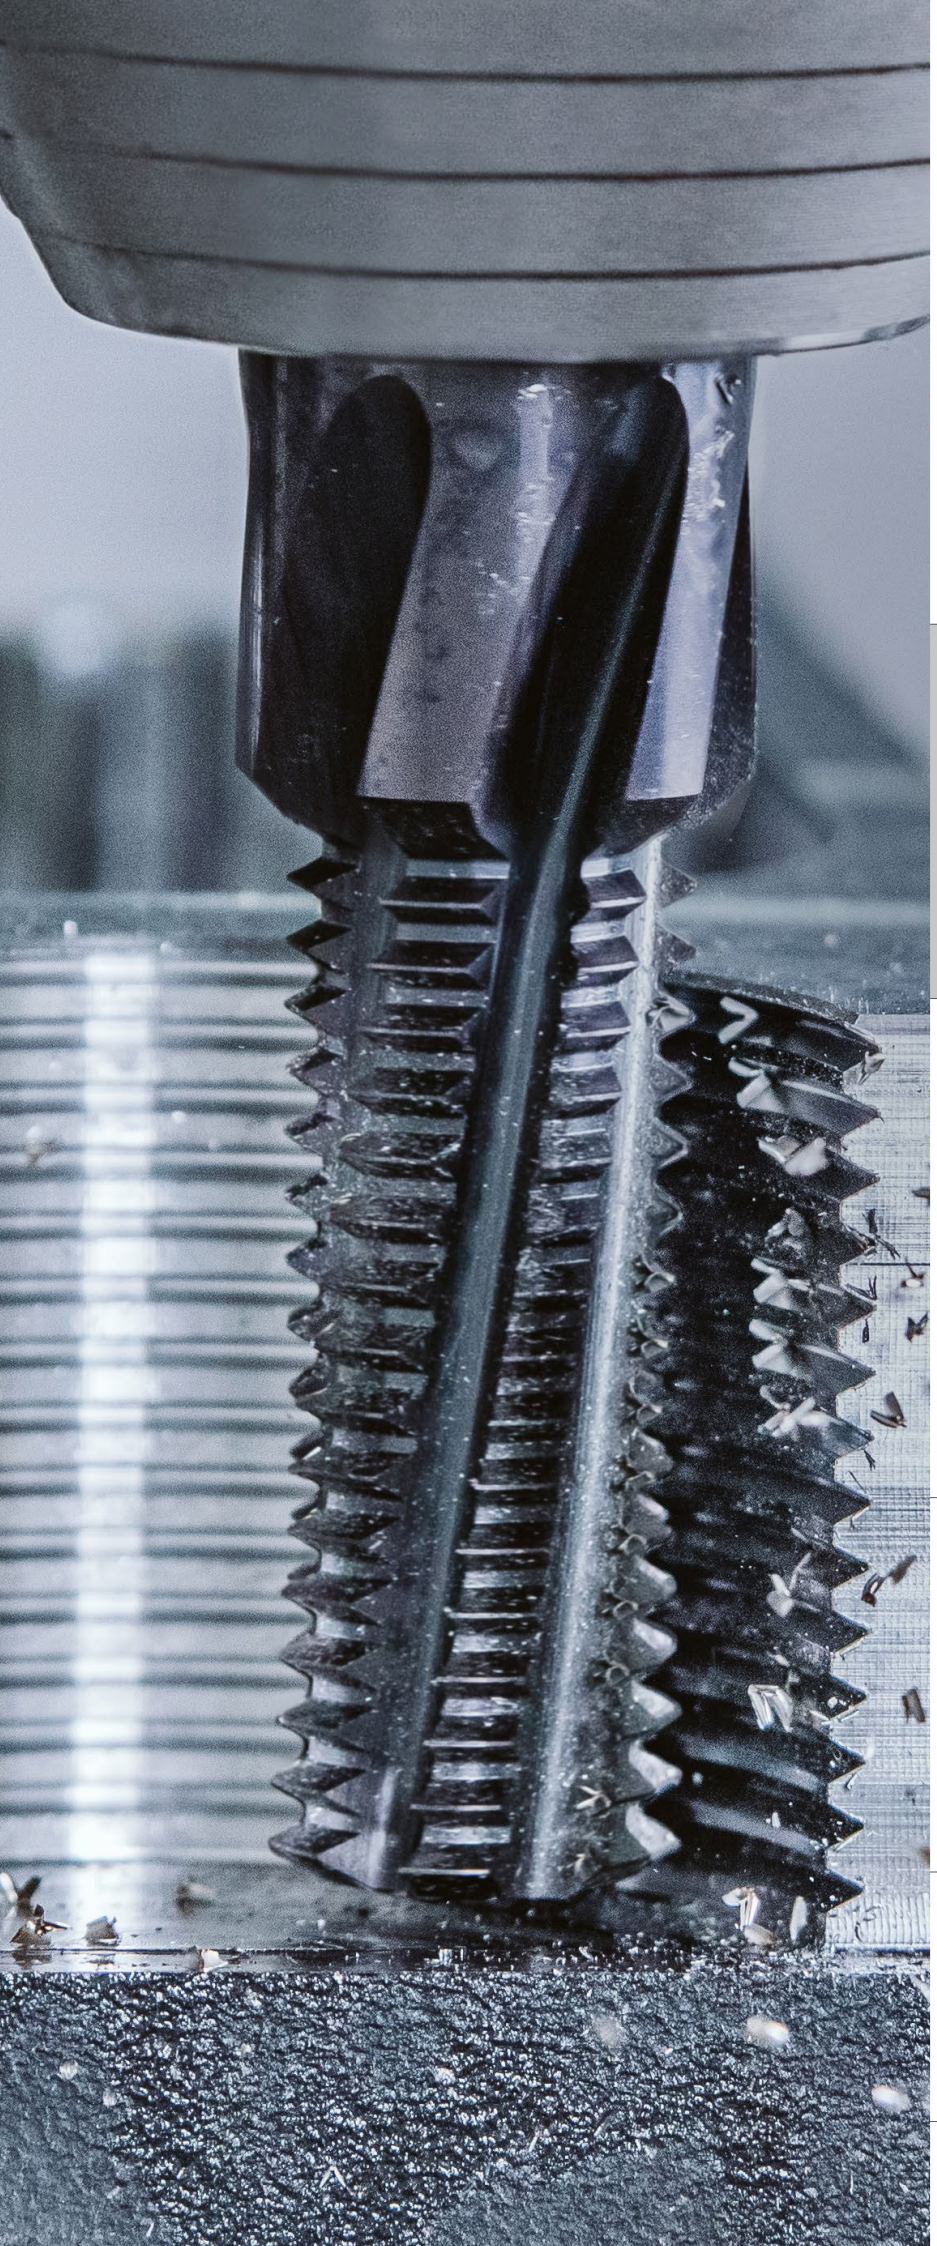

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling 7

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Tool types	5
Overview Circular and Thread Milling Cutters	5
Thread types	6
Process description	6+7
Toolfinder	8+9
Product programme	10–76
Technical Information	
Cutting Data	77–83
Milling processes (climb milling and conventional milling)	84
Feed rate calculation	84
Calculation of cutting data for thread milling	85
Coatings	85

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Version

no drilling required

central internal coolant

Radial thro' coolant

Coolant supply either via the flange or centrally

left-hand cutting

Shank

Plain cylindrical shank

Cylindrical shank with lateral driving face „Weldon“

● = **Main Application**

○ = Extended application

Thread / Flank angle

Explanation of the types of thread can be found on → **Page 6.**

Flank angle 60°

Applications

Circlip Grooves

Full radius slot milling

Slot milling

Multipurpose milling

Chamfering and Deburring

Internal R/L

External R/L

Internal/External R/L

Tool types

System 300	Circular milling cutter with solid carbide insert
Polygon	Circular shank milling cutter with carbide indexable insert (polygon insert seat)
Mini Mill	Circular milling cutter with solid carbide milling insert (with three-rib insert connection)
MWN	Multi-tooth thread milling cutter with carbide indexable inserts (straight insert seat) and Weldon flat
GZD	Multi-tooth thread milling cutter with carbide indexable inserts (angled insert seat) and Weldon flat
GZG	Multi-tooth thread milling cutter with carbide indexable inserts (straight insert seat) and Weldon flat
EAW	Single-row thread milling cutter with carbide indexable inserts and Weldon flat
EWM	Single-row thread milling cutter with carbide indexable insert and SK adapter
BGF	Solid carbide drill thread milling cutter
Micro Mill	Solid Carbide Circular End Milling Cutter
ZBGF	Solid carbide circular drill thread milling cutter
SGF	Thread milling cutter
SFSE	Thread milling cutter with chamfer facet
SFSE Micro	Thread milling cutter for smallest threads
HR	Single-row shank thread milling cutter

7

Overview Circular and Thread Milling Cutters

Modular Circular Milling Cutters with Carbide Indexable Inserts (ModuSet)

- the perfect tool for every application
- various holders, depending on overhang
- the same threading insert for different pitches and diameters
- highest flexibility and stability
- in addition to circular thread milling, circular and linear milling operations can also be carried out

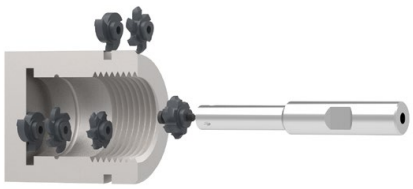

1st choice for small batch sizes and large threads

Thread Milling Cutters with Indexable Carbide Inserts (ModuThread)

- exchange of the insert for different threads
- same threading insert for different diameters

Solid Carbide Thread Milling Cutters (MonoThread)

- short machining times, ideal for volume production
- one tool for all thread types
- one thread milling cutter for different diameters with the same pitch

MicroMill

SGF

ZBGF

BGF

Thread types

M	Metric ISO standard thread
MF	Metric ISO fine thread
G	Whitworth pipe thread
UN	Unified thread
UNC	Unified Standard Thread
UNF	Unified fine thread
BSW	Whitworth thread
BSF	Whitworth fine thread
NPT	American taper pipe thread
Pg	Steel conduit thread
Tr	Trapezoidal thread

Thread milling process description

Thread milling

- Cutting
- Thread production by circular milling in the pitch (helical interpolation)
- Can be used for a wide range of materials up to 60 HRC
- Lower torque than taps and thread formers (no reversing of the spindle necessary)
- Thread machining to the bottom of the hole possible
- High-speed cutting (HSC) can be performed

Advantages of thread milling

- Different tolerances can be produced with one tool
- One tool for blind hole and through hole machining
- Outstanding workpiece surfaces and dimensional accuracy guaranteed
- One tool for right and left-hand threads
- Low cutting pressure when machining thin-walled parts
- Precisely repeatable thread depth
- No chip issues and no chip root residues in the finished thread

Added advantages of thread milling cutters with chamfer facet

- Savings in tool change and setup times, resulting in significantly shorter machining times
- Optimisation of magazine assignment in the machine

Process

Positioning above the workpiece	
Entry to start position for thread milling	
Circular approach (milling) in inward circular grinding (90°/180°) at 1/4 pitch	
1x pitch in "Z+" direction	
Outward circular grinding in the centre of the hole (90°/180°)	
Exit to start position	

Climb milling is shown here.
Further information on the milling processes (climb and conventional milling) can be found on → **page 84**

Description of procedure, thread milling cutters

Thread milling

- Cutting
- Production of a complete thread – drilling, countersinking and thread milling with just one tool
- Can be used in different materials (K/N)
- Prerequisite: CNC-controlled milling machine or machining centre with the helical interpolation function

Advantages

- Shortest machining times thanks to high cutting speeds and feeds
- Savings in tool change and setup times, resulting in significantly shorter machining times
- Optimisation of magazine assignment in the machine
- Different tolerances can be produced with one tool
- Outstanding workpiece surfaces and dimensional accuracy guaranteed
- One tool for blind hole and through hole machining
- Precisely repeatable thread depth
- No chip issues and no chip root residues in the finished thread
- High-speed cutting (HSC) can be performed

Process

Positioning above the workpiece	
Tapping, drilling, countersinking	
Chip removal	
Entry to start position for thread milling	
Circular approach (milling) in inward circular grinding (90°/180°) at 1/4 pitch	
1x pitch in "Z+" direction	
Outward circular grinding in the centre of the hole (90°/180°)	
Exit to start position	

Circular drill thread milling

- Cutting
- Production of a complete thread – drilling, countersinking and thread milling with just one tool
- Can be used in different materials (H/S/O)
- Prerequisite: CNC-controlled milling machine or machining centre with the helical interpolation function

Advantages

- Shortest machining times due to simultaneous creation of the tap hole and thread
- Savings in tool change and setup times, resulting in significantly shorter machining times
- Optimisation of magazine assignment in the machine
- Different tolerances can be produced with one tool
- Outstanding workpiece surfaces and dimensional accuracy guaranteed
- One tool for blind hole and through hole machining
- Precisely repeatable thread depth
- Optimum chip removal and no chip root residues in the finished thread

Process

Positioning above the workpiece	
Chamfering (until countersinking depth is reached)	
Return to the start position above the component	
Circular drill thread milling in helical motion to the required thread depth	
Outward circular grinding in the centre of the hole (90°/180°)	
Exit to start position	

Toolfinder

Tool types			Tool properties	from bore diameter in mm
ModuSet – Modular Circular Milling Cutters with Carbide Indexable Inserts	Polygon		▲ high power transmission through polygon connection ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel	9,6
	Mini Mill		▲ three interlocking rib location ▲ compatible with popular manufacturer systems ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel	9,6
	System 300		▲ proven circular milling tool ▲ 3 edged inserts	7,9
ModuThread – Thread Milling Cutters with Indexable Carbide Inserts	MWN		▲ multi tooth thread milling cutter ▲ double sided inserts ▲ exclusively for thread production ▲ holder for tapered threads	9,0
	GZD		▲ multi tooth drilling and thread milling cutter ▲ for thread milling in solid material ▲ core hole and thread with one tool	14,0
	GZG		▲ multi tooth thread milling cutter ▲ exclusively for thread production	18,5
	EAW		▲ single-row thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for production of the thread ▲ insert holder with cylindrical shank DIN 1835	17,5
	EWM		▲ single-row thread milling cutter ▲ inserts with 4 cutting edges ▲ exclusively for production of the thread ▲ monoblock insert holder with steep taper DIN 69871	43,0
MonoThread – Solid Carbide Thread Milling Cutters	Micro Mill		▲ solid carbide circular milling cutter for small diameters	1,25
	BGF		▲ drill thread milling cutter ▲ core hole, countersink, thread and thread undercut with one tool	2,45
	ZBGF		▲ circular drill thread milling cutter ▲ core hole, countersink and thread with one tool	2,3
	SFSE Micro		▲ solid carbide shank thread milling cutter with chamfer facet ▲ just one tool for countersink and thread ▲ specially developed for the smallest threads in hard materials	0,75
	SFSE		▲ solid carbide thread milling cutter with chamfering facet ▲ only one tool for threading and chamfering	2,4
	SGF		▲ solid carbide thread milling cutter without chamfering facet ▲ exclusively for thread production	2,4
	HR		▲ single-row shank thread milling cutter ▲ exclusively for production of the thread ▲ up to 3xD in materials up to 60 HRC	3,14

Thread / Flank angle								Applications					Tool holder
60° M MF	55° G	55° BSW BSF	60° UN	60° UNC UNF	80° Pg	60° NPT	30° Tr						
16+17	18	18		20			19	10+11	12+13	14	14	15	21
29+30	30							22	23+24 25	24	26	27+28	31–33
37	38	38						34+35	36		36		39
40	41		41		42	42							43+44
45	45												46
47	48		49		48								50
51	51		51										52
53			53										54
56									55		55		
57+58													
59													
61													
62+63 67	64 68			66 69		65 68							
70+71 73 76	72 74	74		75									
60													

7

ModuSet – Milling inserts for circlip grooves without chamfer

Polygon

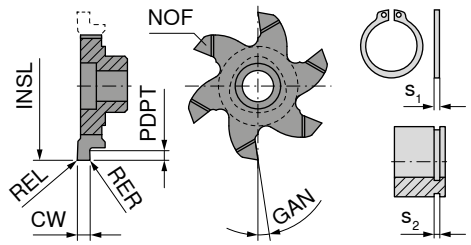

Ti500

Solid carbide

50 880 ...

Size	$s_{2\ H13}$ mm	INSL mm	CW $_{-0,03}$ mm	PDPT mm	REL mm	RER mm	GAN °	s_1 mm	NOF	EUR W2	
6	0,90	9,6	0,98	1,20	0,05	0,05	6	0,80	3	45,06	**292**
	1,10	11,7	1,18	1,00	0,05	0,05	6	1,00	3	42,87	**294**
	1,30	11,7	1,38	1,00	0,05	0,05	6	1,20	3	42,87	**296**
	1,60	11,7	1,68	1,00	0,10	0,10	6	1,50	3	42,87	**298**
7	1,10	16,0	1,18	0,90	0,05	0,05	6	1,00	6	59,68	**301**
	1,30	16,0	1,38	1,10	0,05	0,05	6	1,20	6	60,12	**302**
	1,60	16,0	1,68	1,25	0,10	0,10	6	1,50	6	60,12	**304**
	1,85	16,0	1,93	1,25	0,10	0,10	6	1,75	6	60,12	**306**
	1,10	17,7	1,18	0,90	0,05	0,05	6	1,00	6	60,71	**308**
	1,30	17,7	1,38	1,10	0,05	0,05	6	1,20	6	60,71	**309**
	1,60	17,7	1,68	1,25	0,10	0,10	6	1,50	6	60,71	**310**
	1,85	17,7	1,93	1,25	0,10	0,10	6	1,75	6	60,71	**311**
9	1,10	20,0	1,18	0,90	0,05	0,05	6	1,00	6	62,45	**313**
	1,30	20,0	1,38	1,10	0,05	0,05	6	1,20	6	62,45	**314**
	1,60	20,0	1,68	1,25	0,10	0,10	6	1,50	6	62,45	**315**
	1,85	20,0	1,93	1,25	0,10	0,10	6	1,75	6	62,45	**316**
	1,60	21,7	1,68	1,25	0,10	0,10	6	1,50	6	63,17	**318**
	1,85	21,7	1,93	1,25	0,10	0,10	6	1,75	6	63,17	**319**
	2,15	21,7	2,23	1,75	0,10	0,10	6	2,00	6	63,17	**320**
	2,65	21,7	2,73	1,75	0,20	0,20	6	2,50	6	63,17	**321**
10	1,30	26,0	1,38	1,10	0,05	0,05	6	1,20	6	65,48	**322**
	1,60	26,0	1,68	1,25	0,10	0,10	6	1,50	6	65,48	**324**
	1,85	26,0	1,93	1,25	0,10	0,10	6	1,75	6	65,48	**326**
	2,15	26,0	2,23	1,75	0,10	0,10	6	2,00	6	65,48	**328**
	2,65	26,0	2,73	1,75	0,20	0,20	6	2,20	6	65,48	**330**
	3,15	26,0	3,23	2,20	0,20	0,20	6	3,00	6	65,48	**332**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling inserts for circlip grooves with chamfer

▲ Both edges chamfered CHWTL x 45°

Polygon

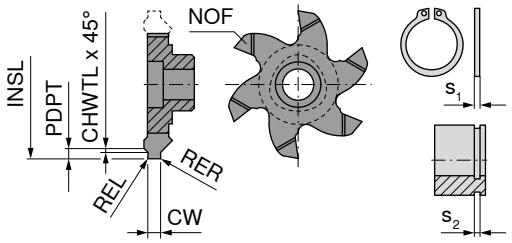

Ti500

Solid carbide

50 879 ...

Size	$s_{2\ H13}$ mm	INSL mm	CW $_{-0,03}$ mm	PDPT mm	REL mm	RER mm	CHWTL mm	s_1 mm	NOF	EUR W2	
7	1,10	16,0	1,18	0,50	0,05	0,05	0,10	1,00	6	63,89	**292**
	1,30	16,0	1,38	0,85	0,05	0,05	0,15	1,20	6	65,90	**302**
	1,60	16,0	1,68	1,00	0,10	0,10	0,15	1,50	6	65,90	**304**
	1,85	16,0	1,93	1,25	0,10	0,10	0,20	1,75	6	65,90	**306**
9	1,10	20,0	1,18	0,50	0,05	0,05	0,10	1,00	6	68,37	**307**
	1,30	20,0	1,38	0,85	0,05	0,05	0,15	1,20	6	68,37	**308**
	1,60	20,0	1,68	1,00	0,10	0,10	0,15	1,50	6	68,37	**309**
	1,60	21,7	1,68	1,00	0,10	0,10	0,15	1,50	6	68,37	**312**
	1,85	20,0	1,93	1,25	0,10	0,10	0,20	1,75	6	68,37	**310**
	1,85	21,7	1,93	1,25	0,10	0,10	0,20	1,75	6	68,37	**314**
	2,15	21,7	2,23	1,50	0,10	0,10	0,20	2,00	6	68,37	**316**
	2,65	21,7	2,73	1,75	0,20	0,20	0,20	2,50	6	68,37	**318**
10	1,30	26,0	1,38	0,85	0,05	0,05	0,15	1,20	6	71,13	**322**
	1,60	26,0	1,68	1,00	0,10	0,10	0,15	1,50	6	71,13	**324**
	1,85	26,0	1,93	1,25	0,10	0,10	0,20	1,75	6	71,13	**326**
	2,15	26,0	2,23	1,50	0,10	0,10	0,20	2,00	6	71,13	**328**
	2,65	26,0	2,73	1,75	0,20	0,20	0,20	2,50	6	71,13	**330**
	3,15	26,0	3,23	1,75	0,20	0,20	0,20	3,00	6	71,13	**332**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling insert without profile

▲ Size 7: from 5.0 mm groove width with ground chip breaker
▲ Size 10: from 6.5 mm groove width with ground chip breaker

Polygon

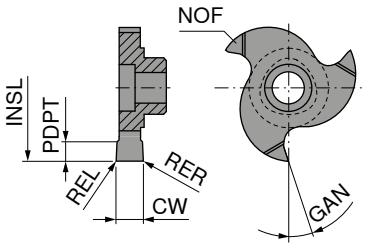

Ti500

Solid carbide

50 875 ...

Size	CW +/-0,02 mm	INSL mm	PDPT mm	REL mm	RER mm	GAN °	NOF	EUR W2	
6	1,5	11,7	2,25	0,10	0,10	6	3	45,06	**302**
	2,0	11,7	2,25	0,15	0,15	6	3	45,06	**304**
	2,5	11,7	2,25	0,15	0,15	6	3	46,07	**306**
	3,0	11,7	2,25	0,15	0,15	6	3	46,07	**308**
7	3,5	16,0	3,50	0,15	0,15	0	3	50,26	**310**
	3,5	16,0	3,50	0,15	0,15	8	3	50,26	**312**
	3,5	16,0	3,50	0,15	0,15	12	3	50,26	**314**
	5,0	16,0	3,50	0,15	0,15	0	3	56,78	**316**
	5,0	16,0	3,50	0,15	0,15	8	3	56,78	**318**
	5,0	16,0	3,50	0,15	0,15	12	3	56,78	**320**
10	4,0	25,0	5,70	0,15	0,15	0	3	52,14	**330**
	4,0	25,0	5,70	0,15	0,15	8	3	52,14	**332**
	4,0	25,0	5,70	0,15	0,15	12	3	52,14	**334**
	5,0	25,0	5,70	0,15	0,15	8	3	60,83	**337**
	6,5	25,0	5,70	0,15	0,15	0	3	63,75	**340**
	6,5	25,0	5,70	0,15	0,15	8	3	63,75	**342**
	6,5	25,0	5,70	0,15	0,15	12	3	63,75	**344**
	8,0	25,0	5,70	0,15	0,15	0	3	70,70	**350**
	8,0	25,0	5,70	0,15	0,15	8	3	70,70	**352**
	8,0	25,0	5,70	0,15	0,15	12	3	70,70	**354**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling insert without profile

Polygon

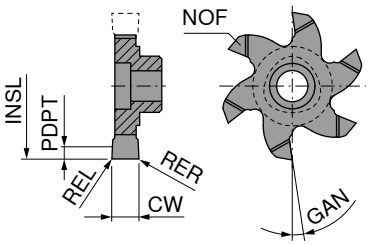

Ti500

Solid carbide

50 876 ...

Size	CW +/-0,02 mm	INSL mm	PDPT mm	REL mm	RER mm	GAN °	NOF	EUR W2	
7	1,5	17,7	4,0	0,10	0,10	6	6	54,75	307
	2,0	17,7	4,0	0,10	0,10	6	6	55,04	308
	2,5	17,7	4,0	0,15	0,15	6	6	55,48	309
	3,0	16,0	3,5	0,15	0,15	6	6	62,86	302
	4,0	16,0	3,5	0,15	0,15	6	6	66,49	304
	5,0	16,0	3,5	0,15	0,15	6	6	68,54	306
9	1,5	21,7	5,0	0,10	0,10	6	6	63,17	314
	2,0	21,7	5,0	0,10	0,10	6	6	63,60	315
	2,5	21,7	5,0	0,15	0,15	6	6	63,60	316
	3,0	21,7	5,0	0,15	0,15	6	6	64,02	317
	3,0	20,0	4,2	0,15	0,15	6	6	64,02	311
	4,0	20,0	4,2	0,15	0,15	6	6	65,90	312
	5,0	20,0	4,2	0,15	0,15	6	6	69,67	313
10	1,5	27,7	6,8	0,10	0,10	6	6	77,79	330
	2,0	27,7	6,8	0,10	0,10	6	6	78,95	332
	2,5	27,7	6,8	0,15	0,15	6	6	78,95	334
	3,0	26,0	6,2	0,15	0,15	6	6	66,49	322
	3,0	27,7	6,8	0,15	0,15	6	6	80,10	336
	4,0	26,0	6,2	0,15	0,15	6	6	70,26	324
	5,0	26,0	6,2	0,15	0,15	6	6	70,55	326
	6,5	26,0	6,2	0,15	0,15	6	6	72,28	328

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling inserts for radius milling

Polygon

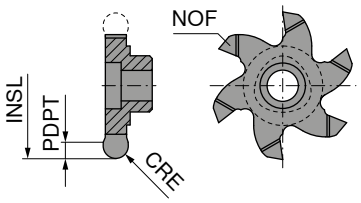

Ti500

Solid carbide

Size	CRE mm	INSL mm	PDPT mm	NOF	50 886 ... EUR W2	
6	1,100	9,6	1,20	3	47,20	702
	0,788	11,7	2,25	3	47,20	704
	1,100	11,7	2,25	3	47,20	708
	1,190	11,7	2,25	3	47,20	706
7	0,788	17,7	4,20	6	59,66	712
	1,100	17,7	4,20	6	59,66	714
9	0,785	21,7	5,00	6	71,90	720
	1,000	21,7	5,00	6	71,90	722
	1,200	21,7	5,00	6	71,90	724
	1,400	21,7	5,00	6	71,90	726
	1,500	21,7	5,00	6	71,90	728

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

ModuSet – Milling inserts for chamfering and deburring

Polygon

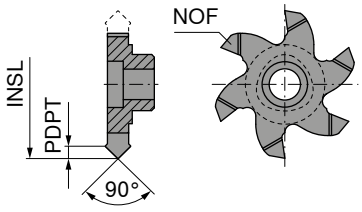

Ti500

Solid carbide

Size	PDPT mm	INSL mm	NOF	50 884 ... EUR W2	
6	1,20	9,6	3	42,87	292
	1,50	11,7	3	42,87	294
7	1,90	16,0	6	64,90	302
	1,30	17,7	6	65,03	304
9	1,90	20,0	6	67,21	312
	1,95	21,7	6	65,48	314
10	2,10	26,0	6	71,13	322

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

ModuSet – Milling insert for part-off

Polygon



NEW

Ti500

Solid carbide

51 800 ...

Size	DMIN mm	PDPT mm	CW +0,02 mm	REL mm	RER mm	W1 mm	NOF	EUR W2	
6	14	3,40	1,5	0,1	0,1	3,50	6	87,08	14000
7	22	6,40	1,5	0,1	0,1	3,86	9	97,72	22000
9	32	10,25	1,5	0,1	0,1	4,91	9	111,50	32000
10	37	11,50	1,5	0,1	0,1	4,86	9	125,90	37000

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Thread milling insert – Partial profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!







Solid carbide

Size	TP mm	INSL mm	CF mm	NOF	TD mm	50 882 ... EUR W2	
6	1 - 3	11,7	0,10	3	≥16	62,15	292
7	1 - 3	17,7	0,10	6	≥22	69,67	306
	1 - 4	16,0	0,10	6	≥20	70,26	302
	2,5 - 4	16,0	0,25	6	≥22	69,67	304
9	1 - 2	21,7	0,10	6	≥27	70,82	314
	1 - 3	20,0	0,10	6	≥24	70,82	312
	2 - 4	21,7	0,15	6	≥30	70,82	316
10	1 - 3	26,0	0,10	6	≥32	75,47	322
	2,5 - 5	26,0	0,25	6	≥36	74,89	324
	3,5 - 6	26,0	0,40	6	≥52	83,09	32600

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Thread milling insert – Full profile



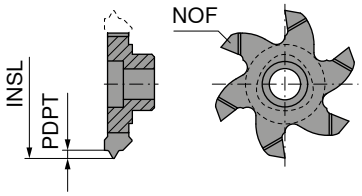

Ti500

Solid carbide

Size	TP mm	INSL mm	PDPT mm	NOF	Thread	50 881 ... EUR W2	
6	1	9,6	0,572	3	≥ M12x1	75,76	292
	1,5	9,6	0,875	3	≥ M14x1,5	75,76	293
	2	10,5	1,157	3	≥ M18x2	75,76	296
7	1,5	16,0	0,875	6	≥ M20x1,5	86,78	302
	2	16,0	1,157	6	≥ M22x2	86,78	304
	2,5	16,0	1,430	6	≥ M24x2,5	86,78	306
	2,5	16,0	1,430	6	M20, M22	93,14	308 1)
	3	16,0	1,702	6	≥ M24	86,78	310
9	1,5	20,0	0,875	6	≥ M24x1,5	88,94	312
	2	20,0	1,157	6	≥ M27x2	88,94	314
	3	20,0	1,702	6	M24, M27	88,94	316 1)
10	1,5	26,0	0,875	6	≥ M30x1,5	92,40	322
	2	26,0	1,157	6	≥ M33x2	92,40	324
	3	26,0	1,702	6	≥M39x3	92,40	330
	3,5	26,0	1,982	6	≥ M42x3,5	92,40	332
	3,5	24,0	1,982	6	M30, M33	91,55	331 1)
	4	26,0	2,263	6	M36-M54x4	91,55	335 1)
	4	26,0	2,263	6	≥ M48x4	92,40	334
	4,5	26,0	2,553	6	≥ M42	92,40	336
	5	26,0	2,836	6	≥ M48	91,55	337

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) profile corrected

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Thread milling insert – Full profile

▲ 50 883 322 for threads > 1"

Polygon | G | BSW | BSF | 55°

R/L

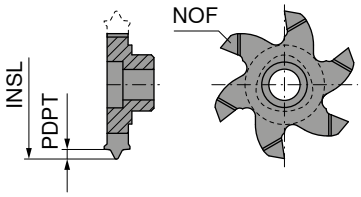

Ti500

Solid carbide

Size	TPI 1/"	TP mm	INSL mm	PDPT mm	NOF	50 883 ... EUR W2	
6	19	1,337	9,6	0,871	3	75,76	292
7	14	1,814	17,7	1,177	6	84,61	308
	14	1,814	16,0	1,177	6	86,33	304
	11	2,309	16,0	1,494	6	86,78	302
	10	2,540	16,0	1,646	6	86,33	306
9	14	1,814	20,0	1,177	6	88,94	316
	11	2,309	20,0	1,494	6	88,94	314
10	11	2,309	26,0	1,494	6	92,40	322

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Thread milling insert – Full profile

▲ DIN 103



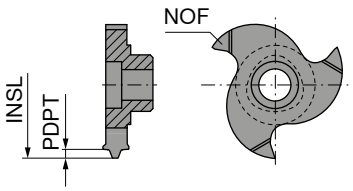



Solid carbide

Size	TP mm	INSL mm	PDPT mm	NOF	Thread	50 872 ... EUR W2	
6	2	11,7	1,25	3	Tr 16x2 - Tr 20x2	82,72	292
	3	11,0	1,75	3	Tr 18x3 - Tr 20x3	82,72	294
	4	12,0	2,25	3	Tr 20x4	82,72	296 1)
7	3	14,0	1,75	3	Tr 24x3 - Tr 32x3	112,80	302 2)
	5	15,3	2,75	3	Tr 28x5 - Tr 36x5	112,80	306 3)
	5	15,3	2,75	3	Tr 26x5	112,80	304 3)
	6	16,2	3,50	3	Tr 34x6 - Tr 42x6	112,80	310 2)
	6	16,2	3,50	3	Tr 30x6 - Tr 32x6	112,80	308 2)
10	5	25,0	2,75	3	Tr 44x5 - Tr 48x5	142,80	322 4)
	7	22,0	3,75	3	Tr 38x7 - Tr 42x7	142,80	324 4)

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) profile corrected
2) Not suitable for the 50 805 011 and 50 805 010 holders
3) Not suitable for the 50 805 011 and 50 805 010 holders / profile corrected
4) Not suitable for the 50 805 026, 50 805 025 and 50 805 024 holders

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!

Polygon | UNC | 60°

R/L

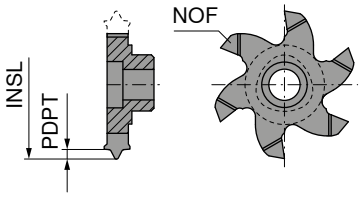

Ti500

Solid carbide

Size	TPI 1/"	INSL mm	PDPT mm	NOF	50 886 ... EUR W2	
6	12	9,6	1,228	3	75,76	202
	11	10,5	1,355	3	75,76	204
	10	11,7	1,485	3	75,76	206
7	9	16,0	1,577	6	86,33	212
9	8	18,0	1,809	6	88,94	222
	7	20,0	2,043	6	88,94	224

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

ModuSet – Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!

Polygon | UNF | 60°

R/L

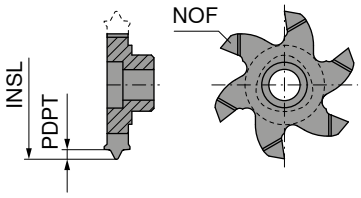

Ti500

Solid carbide

Size	Thread	INSL mm	PDPT mm	NOF	50 886 ... EUR W2	
6	1/2 - 20	9,6	0,733	3	75,76	302
	9/16 - 18	10,5	0,827	3	75,76	304
	3/4 - 16	11,7	0,945	3	75,76	306
7	7/8 - 14	17,7	1,071	6	84,61	312
9	1 - 12	20,0	1,228	6	84,61	322

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Circular milling cutter

- ▲ For maximum machining depth, note insert width (CW)
- ▲ Size 6 = for INSL 9.6; 10.5; 11.7; 12
- ▲ Size 7 = for INSL 16; 17.7
- ▲ Size 9 = for INSL 18; 20; 21.7
- ▲ Size 10 = for INSL 24; 25; 26; 27.7
- ▲ Holder available as screw-in variant in the online shop

Scope of supply:
including key

Polygon

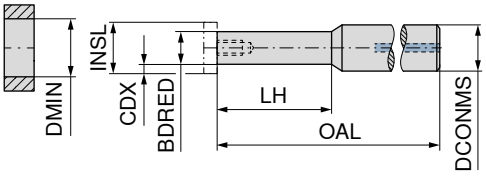

7

Size	LH mm	CDX mm	DCONMS h6 mm	OAL mm	BDRED mm	DMIN mm	torque moment Nm	50 805 ... EUR W1		50 805 ... EUR W1	
6	20,00	2,25	12	67,5	7,0	12	1,0			180,40	050 [1]
	20,00	2,25	12	67,5	7,0	12	1,0			289,80	051
	20,00	2,25	12	67,5	7,0	12	1,0	289,80	052		
	30,00	2,25	12	80,0	7,0	12	1,0			303,70	053
	30,00	2,25	12	80,0	7,0	12	1,0	303,70	054		
	40,00	2,25	12	100,0	7,0	12	1,0			328,70	055
	40,00	2,25	12	100,0	7,0	12	1,0	328,70	056		
7	20,90	4,00	12	67,4	9,0	18	1,1			180,40	002 [1]
	21,00	4,00	12	67,4	9,0	18	1,1			289,80	004
	21,00	4,00	12	67,4	9,0	18	1,1	289,80	005		
	36,00	4,00	12	82,4	9,0	18	1,1			296,80	008
	36,00	4,00	12	82,4	9,0	18	1,1	307,80	085		
		4,00	12	122,5	12,0	18	1,1	362,10	010		
		4,00	12	82,4	12,0	18	1,1	284,10	011		
9	29,75	5,00	16	80,0	11,5	22	3,8			180,40	070 [1]
	30,00	5,00	16	80,0	11,5	22	3,8			339,70	071
	30,00	5,00	16	80,0	11,5	22	3,8	339,70	072		
	50,00	5,00	16	100,0	11,5	22	3,8			351,10	073
	50,00	5,00	16	100,0	11,5	22	3,8	351,10	074		
10	20,50	5,70	16	105,0	15,5	28	5,5	342,60	025		
	20,50	6,80	16	149,7	15,5	28	5,5	488,90	024		
	20,50	6,80	20	175,4	15,5	28	5,5	566,90	026		
	30,40	6,80	16	79,6	13,6	28	5,5			187,30	012 [1]
	30,50	6,80	16	79,6	13,6	28	5,5	339,70	015		
	30,50	6,80	16	79,6	13,6	28	5,5			339,70	014
	45,50	6,80	16	94,6	13,6	28	5,5	351,10	021		
	45,50	6,80	16	94,6	13,6	28	5,5			351,10	020
	60,50	6,80	16	109,6	13,6	28	5,5			372,00	022
	60,50	6,80	16	109,6	13,6	28	5,5	372,00	023		

1) Steel version

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			70 960 ... EUR 2A	
6	T08 - IP	13,16	125	M2,5x7	8,10	246
7	T08 - IP	13,16	125	M3x13	8,10	231
9	T15 - IP	15,33	128	M4x13	8,10	236
10	T20 - IP	16,17	129	M5x13,5	8,10	243

ModuSet – Milling insert for circlip grooves

Mini Mill

≥ Ø 10 mm



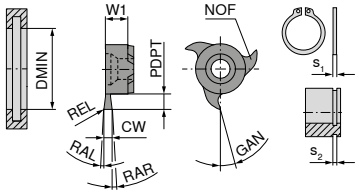

CWX500

Solid carbide

53 006 ...

Size	DMIN mm	$s_{2\ H13}$ mm	CW $_{-0.02}$ mm	PDPT mm	W1 mm	REL mm	RAL °	RAR °	GAN °	s_1 mm	NOF	EUR W2	
10	10	0,70	0,74	1,5	3,50		1	1	15	0,60	3	43,90	**070**
	10	0,80	0,84	1,5	3,50		1	1	15	0,70	3	43,90	**080**
	10	0,90	0,94	1,5	3,50		1	1	15	0,80	3	43,90	**090**
	10	1,10	1,21	1,5	3,50		3	3	15	1,00	3	39,25	**110**
	10	1,30	1,41	1,5	3,50	0,10	3	3	15	1,20	3	39,25	**130**
	10	1,60	1,71	1,5	3,50	0,10	3	3	15	1,50	3	39,25	**160**
	12	1,10	1,21	2,5	3,50		3	3	15	1,00	3	39,25	**112**
	12	1,30	1,41	2,5	3,50	0,10	3	3	15	1,20	3	39,25	**132**
	12	1,60	1,71	2,5	3,50	0,10	3	3	15	1,50	3	39,25	**162**
18	18	0,70	0,74	1,5	5,75		1	1	15	0,60	3	44,75	**270**
	18	0,80	0,84	1,7	5,75		1	1	15	0,70	3	44,75	**280**
	18	0,90	0,94	1,9	5,75		1	1	15	0,80	3	44,75	**290**
	18	1,10	1,21	3,5	5,75		3	3	15	1,00	3	42,00	**310**
	18	1,30	1,41	3,5	5,75	0,10	3	3	15	1,20	3	42,00	**330**
	18	1,60	1,71	3,5	5,75	0,10	3	3	15	1,50	3	42,00	**360**
22	22	0,70	0,74	1,5	5,70		1	1	15	0,60	3	47,52	**470**
	22	0,80	0,84	1,7	5,70		1	1	15	0,70	3	46,62	**480**
	22	0,90	0,94	1,9	5,70		1	1	15	0,80	3	42,60	**490**
	22	1,00	1,04	2,1	5,70		1	1	15	0,90	3	45,06	**500**
	22	1,10	1,21	2,5	5,70		1	1	15	1,00	3	45,06	**510**
	22	1,30	1,41	4,5	5,70	0,10	3	3	15	1,20	3	42,87	**530**
	22	1,60	1,71	4,5	5,70	0,10	3	3	15	1,50	3	42,87	**560**
	22	1,85	1,96	4,5	5,70	0,15	3	3	15	1,75	3	42,87	**585**
	22	2,15	2,26	4,5	5,70	0,15	3	3	15	2,00	3	42,87	**615**
	22	2,65	2,76	4,5	5,70	0,15	3	3	15	2,50	3	42,87	**665**
	22	3,15	3,26	4,5	5,70	0,20	3	3	15	3,00	3	42,87	**415**
	22	4,15	4,26	4,5	5,70	0,20	3	3	15	4,00	3	42,87	**515**
	22	5,15	5,26	4,5	5,70	0,20	3	3	15	5,00	3	42,87	**605**

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling insert for groove milling

Mini Mill

≥ Ø 10 mm





CWX500

Solid carbide

53 007 ...

Size	DMIN mm	CW 0.02 mm	PDPT mm	W1 mm	REL mm	RAL °	RAR °	GAN °	NOF	EUR W2	
10	10	1,0	1,5	3,50	0,1	3	3	15	3	43,90	010
	10	1,5	1,5	3,50	0,2	3	3	15	3	39,25	015
	10	2,0	1,5	3,50	0,2	3	3	15	3	39,25	020
	10	2,5	1,5	3,50	0,2	3	3	15	3	39,25	025
	12	1,5	2,0	3,50	0,2	3	3	15	6	67,92	114
	12	1,5	2,5	3,50	0,2	3	3	15	3	39,25	115
	12	2,0	2,0	3,50	0,2	3	3	15	6	67,92	119
	12	2,0	2,5	3,50	0,2	3	3	15	3	39,25	120
	12	2,5	2,5	3,50	0,2	3	3	15	3	39,25	125
14	14	1,0	2,5	4,50		3	3	15	3	44,75	210
	14	1,5	2,5	4,50	0,2	3	3	15	3	41,15	215
	14	2,0	2,5	4,50	0,2	3	3	15	3	41,15	220
	14	2,5	2,5	4,50	0,2	3	3	15	3	41,15	225
	16	1,5	3,5	4,50	0,2	3	3	15	3	41,15	315
	16	2,0	3,5	4,50	0,2	3	3	15	3	41,15	320
	16	2,5	3,5	4,50	0,2	3	3	15	3	41,15	325
18	18	1,5	3,5	5,75	0,1	3	3	15	6	76,92	414
	18	1,5	3,5	5,75	0,2	3	3	15	3	42,00	415
	18	2,0	3,5	5,75	0,2	3	3	15	3	42,00	420
	18	2,0	3,5	5,75	0,2	3	3	15	6	76,92	419
	18	2,5	3,5	5,75	0,2	3	3	15	6	76,92	424
	18	2,5	3,5	5,75	0,2	3	3	15	3	42,00	425
	18	3,0	3,5	5,75	0,2	3	3	15	6	76,92	429
	18	3,0	3,5	5,75	0,2	3	3	15	3	42,00	430
	18	4,0	3,5	5,75	0,2	3	3	15	3	42,00	440
22	22	1,0	4,5	6,20	0,1	3	3	15	6	75,33	810
	22	1,5	4,5	5,70	0,2	3	3	15	3	43,90	515
	22	1,5	4,5	6,20	0,1	3	3	15	6	73,88	815
	22	2,0	4,5	6,20	0,2	3	3	15	6	73,88	820
	22	2,0	4,5	5,70	0,2	3	3	15	3	43,90	520
	22	2,5	4,5	6,20	0,2	3	3	15	6	73,88	825
	22	2,5	4,5	5,70	0,2	3	3	15	3	43,90	525
	22	3,0	4,5	5,70	0,2	3	3	15	3	43,90	530
	22	3,0	4,5	6,20	0,2	3	3	15	6	73,88	830
	22	3,5	4,5	5,70	0,2	3	3	15	3	43,90	535
	22	4,0	4,5	5,70	0,2	3	3	15	3	43,90	540
	22	4,0	4,5	6,20	0,2	3	3	15	6	73,88	840
28	25	2,0	5,0	6,50	0,2	3	3	15	3	50,26	620
	25	2,5	5,0	6,50	0,2	3	3	15	3	50,26	625
	25	3,0	5,0	6,50	0,2	3	3	15	3	50,26	630
	25	3,5	5,0	6,50	0,2	3	3	15	3	50,26	635
	25	4,0	5,0	6,50	0,2	3	3	15	3	50,26	640
	28	1,0	6,5	6,25	0,1	3	3	15	6	83,74	610
	28	1,5	6,5	6,25	0,1	3	3	15	6	82,57	615
	28	1,5	6,5	6,50	0,2	3	3	15	3	50,26	715
	28	2,0	6,5	6,25	0,2	3	3	15	6	83,60	721
	28	2,0	6,5	6,50	0,2	3	3	15	3	50,26	720
	28	2,5	6,5	6,25	0,2	3	3	15	6	84,45	726
	28	2,5	6,5	6,50	0,2	3	3	15	3	50,26	725
	28	3,0	6,5	6,50	0,2	3	3	15	3	50,26	730
	28	3,0	6,5	6,25	0,2	3	3	15	6	85,33	731
	28	3,5	6,5	6,50	0,2	3	3	15	3	50,26	735
	28	4,0	6,5	6,25	0,2	3	3	15	6	87,19	741
	28	4,0	6,5	6,50	0,2	3	3	15	3	50,26	740
	28	5,0	6,5	6,50	0,2	3	3	15	3	50,26	750
	28	6,0	6,5	6,50	0,2	3	3	15	3	51,27	760

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling insert for groove milling (Specialist for aluminium)

Mini Mill

≥ Ø 32 mm





CWX500

Solid carbide

53 007 ...

Size	DMIN mm	CW $_{0.02}$ mm	PDPT mm	W1 mm	REL mm	RAL °	RAR °	GAN °	NOF	EUR W2	
28	32	2,0	8,5	6,5	0,2	3	3	20	3	56,07	920
	32	2,5	8,5	6,5	0,2	3	3	20	3	56,07	925
	32	3,0	8,5	6,5	0,2	3	3	20	3	56,07	930

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 83

ModuSet – Milling insert for groove milling with full radius

Mini Mill

≥ Ø 12 mm





CWX500

Solid carbide

53 008 ...

Size	DMIN mm	CW $_{+0.03}$ mm	PDPT mm	W1 mm	REL mm	RAL °	RAR °	GAN °	NOF	EUR W2	
10	12	2,2	2,5	3,50	1,1	3	3	15	3	50,26	011
14	16	2,2	3,5	4,60	1,1	3	3	15	3	51,15	111
18	18	2,2	3,5	5,75	1,1	3	3	15	3	52,14	211
22	22	1,0	4,5	5,75	0,5	3	3	15	3	52,14	305
	22	1,6	4,5	5,75	0,8	3	3	15	3	53,03	308
	22	2,0	4,5	5,75	1,0	3	3	15	3	52,14	310
	22	2,4	4,5	5,75	1,2	3	3	15	3	54,03	312
	22	2,8	4,5	5,75	1,4	3	3	15	3	52,14	314
	22	3,0	4,5	5,75	1,5	3	3	15	3	52,14	315
	22	4,0	4,5	5,75	2,0	3	3	15	3	52,14	320
	22	4,4	4,5	5,75	2,2	3	3	15	3	53,73	322
	22	5,0	4,5	5,75	2,5	3	3	15	3	55,77	325

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling insert for groove milling, cross-pitched

Mini Mill

≥ Ø 12 mm





CWX500

Solid carbide

53 015 ...

Size	DMIN mm	INSL mm	CW +0,02 mm	PDPT mm	W1 mm	REL mm	RAL °	RAR °	GAN °	NOF	EUR W2	
10	12	11,7	1,5	2,0	3,5	0,2	3	3	15	6	67,64	114
	12	11,7	2,0	2,0	3,5	0,2	3	3	15	6	67,64	119
14	16	15,7	1,5	2,5	4,5	0,2	3	3	15	6	68,54	314
	16	15,7	2,0	2,5	4,5	0,2	3	3	15	6	68,54	319
	16	15,7	2,5	2,5	4,5	0,2	3	3	15	6	68,54	324
18	18	17,7	2,0	4,0	5,8	0,2	3	3	15	6	76,48	419
	18	17,7	2,5	4,0	5,8	0,2	3	3	15	6	76,48	424
	18	17,7	3,0	4,0	5,8	0,2	3	3	15	6	76,48	429
	20	19,7	2,0	5,0	5,8	0,2	3	3	15	6	76,48	469
	20	19,7	2,5	5,0	5,8	0,2	3	3	15	6	76,48	474
	20	19,7	3,0	5,0	5,8	0,2	3	3	15	6	76,48	479
22	22	21,7	2,0	4,5	6,2	0,2	3	3	15	6	73,88	820
	22	21,7	2,5	4,5	6,2	0,2	3	3	15	6	73,88	825
	22	21,7	3,0	4,5	6,2	0,2	3	3	15	6	73,88	830
	22	21,7	4,0	4,5	6,2	0,2	3	3	15	6	73,88	840
	37	36,7	1,5	12,0	6,2	0,1	3	3	15	6	100,50	865
	37	36,7	2,0	12,0	6,2	0,2	3	3	15	6	102,00	870
28	25	24,8	2,5	5,0	6,4	0,2	3	3	15	6	86,19	626
	25	24,8	3,0	5,0	6,4	0,2	3	3	15	6	87,19	631
	25	24,8	4,0	5,0	6,4	0,2	3	3	15	6	88,94	641
	25	24,8	5,0	5,0	6,4	0,2	3	3	15	6	91,83	651
	25	24,8	6,0	5,0	6,4	0,2	3	3	15	6	97,49	661
	28	27,7	2,5	6,5	6,2	0,2	3	3	15	6	84,01	726
	28	27,7	3,0	6,5	6,2	0,2	3	3	15	6	84,87	731
	28	27,7	4,0	6,5	6,2	0,2	3	3	15	6	86,78	741
	28	27,7	5,0	6,5	6,2	0,2	3	3	15	6	87,91	751
	28	27,7	6,0	6,5	6,2	0,2	3	3	15	6	87,91	761
	35	34,7	2,0	10,0	6,2	0,2	3	3	15	6	92,27	770
	35	34,7	2,5	10,0	6,2	0,2	3	3	15	6	93,14	775
	35	34,7	3,0	10,0	6,2	0,2	3	3	15	6	94,02	780

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling insert for groove milling and chamfering

Mini Mill

≥ Ø 10 mm





CWX500

Solid carbide

53 009 ...

Size	DMIN mm	CF +0,03 mm	PDPT mm	W1 mm	KCH °	PDX mm	GAN °	NOF	EUR W2	
10	10	0,2	0,35	3,60	15	1,80	5	6	68,37	015
	10	0,2	0,45	3,60	20	1,80	5	6	68,37	020
	10	0,2	0,70	3,60	30	1,80	5	6	68,37	030
	10	0,2	1,20	3,60	45	1,80	5	6	68,37	045
	12	1,2	0,80	3,50	45	1,20	5	3	33,75	035
14	16	1,4	1,20	4,50	45	1,60	5	3	34,61	145
18	18	2,5	1,40	5,85	45	1,70	5	3	35,32	258
	18	0,2	2,20	5,75	45	3,00	5	6	75,76	259
22	22	2,0	1,70	5,85	45	2,00	5	3	37,36	358
	22	0,2	2,50	6,40	45	3,90	5	6	74,15	463
	22	3,0	3,00	9,40	45	3,25	5	3	39,25	394 1)
28	28	0,2	1,90	6,05	45	3,75	5	6	82,43	560

P	●
M	●
K	●
N	●
S	○
H	
O	●

1) Use clamping screw 73 082 006

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling insert for part-off

▲ PDPT = 12,0 mm in combination with holder 53 003 624
▲ reduce feed rate by 50 %

Mini Mill

≥ Ø 37 mm





CWX500

Solid carbide

Size	DMIN mm	CW +0,02 mm	PDPT mm	W1 mm	REL mm	RAL °	RAR °	NOF	53 013 ... EUR W2	
22	37	0,5	12	5,6		3	3	6	120,10	705 1)
	37	0,6	12	5,7		3	3	6	119,70	706 1)
	37	0,8	12	6,0		3	3	6	118,00	708 1)
	37	1,0	12	6,2	0,1	3	3	6	114,70	710
	37	1,5	12	6,2	0,1	3	3	6	97,77	715

P	●
M	●
K	●
N	●
S	○
H	
O	●

1) The end face is not ground free to the center

→ v_c/f_z Page 83

7

ModuSet – Set for cut off

▲ Size 22

Mini Mill

Tool	Designation	Article no.	Bore-Ø mm	Piece	53 014 ... EUR W1	
Inserts	Milling inserts for separating	53 013 715	37	2	271,90	990
Tool holder	Endmill short	53 003 624		1		
Screw	M5 x 12	73 082 005		1		
Tightening Key	T20			1		

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling insert for slot and multipurpose milling

▲ Interface with four driving slots
▲ CW 1,5 – 6 mm: cross-pitched

Mini Mill

≥ Ø 50 mm



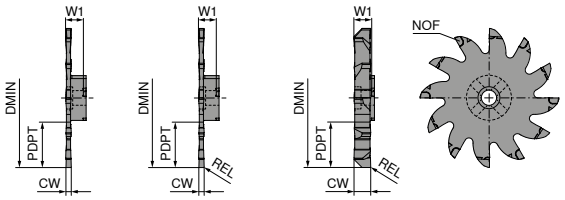

NEW CWX500

Solid carbide

NEW CWX500

Solid carbide

NEW CWX500

Solid carbide

Size	DMIN mm	CW +0,02 mm	PDPT mm	W1 mm	REL mm	NOF	53 017 ... EUR W2		53 017 ... EUR W2		53 017 ... EUR W2	
50	50	0,5	16,5	6,35		12	316,60	00500				
	50	1,0	16,5	6,35		12	290,70	01000				
	50	1,5	16,5	6,35	0,1	12			260,80	01500		
	50	2,0	16,5	6,35	0,2	12			260,80	02000		
	50	2,5	16,5	6,35	0,2	12			235,80	02500		
	50	3,0	16,5	6,35	0,2	12			288,80	03000		
	50	4,0	16,5	6,35	0,2	12					304,90	04000
	50	5,0	16,5	6,35	0,2	12					320,50	05000
	50	6,0	16,5	6,35	0,2	12					344,60	06000
P							●		●		●	
M							●		●		●	
K							●		●		●	
N							●		●		●	
S							○		○		○	
H												
O							●		●		●	

→ v_c/f_z Page 83

Suitable holders can be found on → **page 33.**

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling insert for internal thread milling – Partial profile







CWX500

Solid carbide

53 010 ...

Size	Thread$_{min}$	TP mm	DMIN mm	CF mm	PDPT mm	W1 mm	PDX mm	GAN °	NOF	EUR W2	
10	M12	1,0 - 1,75	9,8	0,13	1,02	3,20	2,4	5	6	76,65	017
	M14	1,0 - 1,75	11,7	0,13	1,08	3,60	2,8	5	3	52,14	010
	M14	1,0 - 2,0	10,1	0,13	1,25	3,20	2,2	5	6	76,65	021
	M14	1,0 - 2,0	11,7	0,13	1,25	3,60	2,8	5	3	52,14	020
	M16	1,5 - 2,75	11,0	0,19	1,67	3,20	2,0	5	6	76,65	027
	M16	1,5 - 2,75	11,7	0,19	1,67	3,60	2,4	5	3	52,14	015
	M16	2,0 - 3,0	11,1	0,25	1,78	3,20	1,9	5	6	76,65	029
	M16	2,0 - 3,0	11,7	0,25	1,78	3,60	2,2	5	3	52,14	030
14	M18	1,0 - 1,75	15,7	0,12	1,08	4,60	3,8	5	3	53,03	210
	M18	1,0 - 2,0	15,7	0,12	1,25	4,60	3,5	5	3	53,03	220
	M20	1,5 - 2,75	15,7	0,18	1,67	4,60	3,5	5	3	53,03	215
	M22	2,5 - 3,0	15,7	0,31	1,78	4,60	3,4	5	3	53,03	230
18	M22	1,0 - 1,75	17,7	0,12	1,03	5,85	5,0	5	3	56,62	410
	M22	1,0 - 2,0	17,7	0,12	1,19	5,85	4,7	5	3	53,03	412
	M22	1,0 - 2,0	17,7	0,12	1,19	5,85	5,0	5	6	89,38	416
	M22	1,5 - 2,75	17,7	0,19	1,62	5,85	4,6	5	3	53,03	415
	M24	2,0 - 3,0	17,7	0,25	1,73	5,85	4,4	5	3	53,03	425
	M24	2,0 - 3,5	17,7	0,25	2,06	5,85	4,2	5	3	53,03	455
	M24	2,0 - 3,5	17,7	0,25	2,06	5,85	4,3	5	6	91,27	434
	M24	2,0 - 3,75	17,7	0,25	2,22	5,85	4,2	5	3	53,03	420
	M24	2,5 - 5,0	17,7	0,31	2,98	5,85	3,8	5	3	53,03	430
	M24	3,0 - 5,5	17,7	0,38	3,25	5,85	4,2	5	3	53,03	435
22	M27	1,0 - 2,0	21,7	0,12	1,19	5,85	4,6	5	3	54,90	610
	M27	1,0 - 2,0	21,7	0,12	1,19	6,20	5,0	5	6	87,63	710
	M27	1,5 - 2,75	21,7	0,18	1,62	5,85	4,5	5	3	54,90	615
	M27	2,0 - 3,75	21,7	0,25	2,22	5,85	4,2	5	3	54,90	620
	M27	2,5 - 4,5	21,7	0,25	2,70	5,85	3,7	5	3	56,62	655
	M27	2,0 - 4,5	21,7	0,25	2,70	6,05	4,2	5	6	89,21	755
	M30	2,5 - 5,0	21,7	0,31	2,98	5,85	3,8	5	3	54,90	630
	M30	3,5 - 6,0	21,7	0,44	3,52	5,85	3,4	5	3	56,62	640
	M30	3,5 - 6,5	21,7	0,44	3,84	5,85	3,2	5	3	56,62	645
28	M33	1,0 - 2,0	27,7	0,12	1,20	6,60	4,5	5	3	64,17	820
	M33	1,5 - 2,5	27,7	0,18	1,49	6,60	4,3	5	3	64,17	825
	M33	1,5 - 2,5	27,7	0,19	1,60	6,10	5,0	5	6	96,03	826
	M36	2,5 - 5,0	27,7	0,38	2,93	6,10	2,3	5	6	96,03	850
	M36	2,5 - 5,0	27,7	0,37	2,93	6,60	4,0	5	3	64,17	840
	M39	4,0 - 6,0	27,7	0,62	3,37	6,60	3,6	5	3	64,17	860

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling insert for internal thread milling – Full profile







CWX500

Solid carbide

53 011 ...

Size	Thread$_{min}$	TP mm	DMIN mm	CF mm	PDPT mm	W1 mm	PDX mm	GAN °	NOF	EUR W2	
18	M22	1,50	17,7	0,18	0,81	5,85	4,8	5	3	54,90	**415**
	M22	1,75	17,7	0,20	0,95	5,85	4,7	5	3	58,54	**417**
	M22	2,00	17,7	0,25	1,08	5,85	4,6	5	3	58,54	**420**
	M24	2,50	17,7	0,31	1,35	5,85	4,4	5	3	58,54	**425**
	M27	3,00	17,7	0,37	1,62	5,85	4,3	5	3	58,54	**430**
	M27	3,50	17,7	0,43	1,89	5,85	4,0	5	3	58,54	**435**
22	M24	1,50	21,7	0,19	0,81	5,85	4,8	5	3	57,66	**615**
	M24	1,50	21,7	0,19	0,81	6,20	5,3	5	6	87,51	**715**
	M27	1,75	21,7	0,22	0,95	6,20	5,2	5	6	91,99	**717**
	M27	1,75	21,7	0,22	0,95	5,85	4,7	5	3	57,66	**617**
	M27	2,00	21,7	0,25	1,08	6,20	5,0	5	6	91,99	**720**
	M27	2,00	21,7	0,25	1,08	5,85	4,6	5	3	60,25	**620**
	M30	3,00	21,7	0,37	1,62	5,85	4,3	5	3	60,25	**630**
	M30	3,00	21,7	0,37	1,62	6,20	4,8	5	6	93,73	**730**
	M30	3,50	21,7	0,43	1,89	5,85	4,0	5	3	64,73	**635**
	M33	4,00	21,7	0,50	2,16	5,85	3,9	5	3	64,73	**640**
	M33	4,00	21,7	0,50	2,16	6,20	4,4	5	6	98,66	**740**
	M33	4,50	21,7	0,56	2,43	5,85	3,7	5	3	64,73	**645**

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

ModuSet – Milling insert for internal thread milling – Full profile







CWX500

Solid carbide

53 012 ...

Size	Thread$_{min}$	TP mm	DMIN mm	TPI 1/"	W1 mm	PDX mm	PDPT mm	CRE mm	RETL mm	RETR mm	GAN °	NOF	EUR W2	
10	G 3/8"	1,34	11,7	19	3,60	2,5	0,860	0,18	0,18	0,18	5	3	64,62	**113**
	G 1/2"	1,81	11,7	14	3,60	2,3	1,160	0,24	0,24	0,24	5	3	64,62	**118**
	G 1"	2,31	11,7	11	3,60	2,0	1,480	0,31	0,31	0,31	5	3	64,62	**123**
18		1,34	17,7	19	5,85	4,9	0,856	0,18	0,18	0,18	5	3	55,77	**219**
	G 3/4"	1,81	17,7	14	5,85	4,6	1,160	0,24	0,24	0,24	5	3	55,77	**214**
	G 1"	2,31	17,7	11	5,85	4,4	1,480	0,31	0,31	0,31	5	3	55,77	**211**
22	G 1"	2,31	21,7	11	5,85	4,0	1,480	0,31	0,31	0,31	5	3	66,61	**311**
		3,17	21,7	8	5,85	3,5	2,030	0,43	0,43	0,43	5	3	72,14	**308**
	BSW 1 1/2"	4,23	21,7	6	5,85	3,1	2,710	0,58	0,58	0,58	5	3	72,14	**306**

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 83

ModuSet – Circular milling cutter, extra short

▲ Steel Version

Scope of supply:
including key

Mini Mill

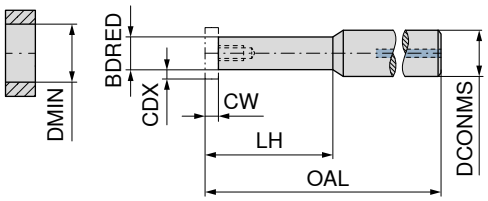

Steel

Size	DCONMS h6 mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	53 004 ... EUR W1	
10	10	6,0	60	15,2	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	135,30	015
14	10	8,0	60	17,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	135,30	217
	13	8,0	70	25,7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	139,30	225
18	10	9,0	60	17,0	17,7	≤5,6	3,5	4,5	135,30	417
	13	9,0	70	25,0	17,7	≤5,6	3,5	4,5	139,30	425
22	10	11,3	60	10,7	21,7	≤9,15	4,5	7,0	139,30	610
	13	11,3	70	25,7	21,7	≤9,15	4	7,0	144,70	625
28	13	14,0	70	10,7	27,7	≤10	6,5	7,0	139,30	810
	20	14,0	100	35,7	27,7	≤10	6,5	7,0	144,70	835

ModuSet – Circular milling cutter, short

▲ Steel Version

Scope of supply:
including key

Mini Mill

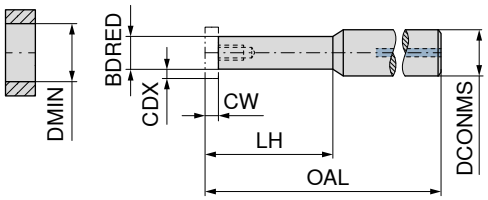

Steel

Steel

Size	DCONMS h6 mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	53 002 ... EUR W1		53 003 ... EUR W1	
10	16	6	80	12,0	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	156,80	012	156,80	012
14	16	8	80	16,0	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	156,80	216	156,80	216
18	16	9	80	18,0	17,7	≤5,6	3,5	4,5	152,80	418	152,80	418
22	16	12	80	24,0	21,7	≤9,15	4,5	7,0	154,20	624	154,20	624
28	20	14	100	35,7	27,7	≤10	6,5	7,0			144,70	835

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Circular milling cutter, vibration-damped

Scope of supply:
including key

Mini Mill

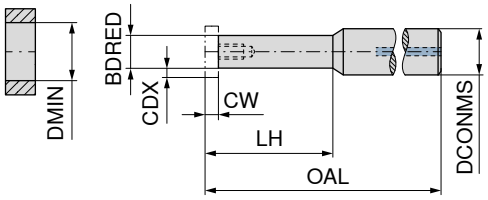

HM

HM

Size	DCONMS h6	BDRED	OAL	LH	DMIN	CW	CDX	torque moment	53 001 ... EUR W1		53 000 ... EUR W1	
	mm	mm	mm	mm	mm	mm	mm	Nm				
10	12	6,0	80	21	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	206,00	021	206,00	021
	12	6,0	90	30	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	221,40	030	221,40	030
	12	6,0	100	42	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	252,10	042	252,10	042
	12	7,3	90	30	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	232,70	130	232,70	130
	16	7,3	100	25	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	342,60	025	342,60	025
14	12	8,0	95	29	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	206,00	229	206,00	229
	12	8,0	110	42	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	222,80	242	222,80	242
	12	8,0	120	56	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	252,10	256	252,10	256
	12	9,5	110	42	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	252,10	342	252,10	342
	16	9,5	110	33	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	313,40	233	313,40	233
18	12	9,0	100	32	17,7	≤5,6	3,5	4,5	256,40	432	256,40	432
	12	9,0	100	45	17,7	≤5,6	3,5	4,5	286,90	445	286,90	445
	12	9,0	120	64	17,7	≤5,6	3,5	4,5	339,70	464	339,70	464
	16	9,0	93	25	17,7	≤5,6	3,5	4,5	286,90	425	286,90	425
	16	9,0	100	32	17,7	≤5,6	3,5	4,5	302,20	532	302,20	532
	16	9,0	110	45	17,7	≤5,6	3,5	4,5	355,20	545	355,20	545
	16	9,0	130	64	17,7	≤5,6	3,5	4,5	408,10	564	408,10	564
	16	13,0	110	64	17,7	≤5,6	1,5	4,5	313,40	465	313,40	465
	16	13,0	130	66	17,7	≤5,6	1,5	4,5	396,90	466	396,90	466
22	12		100	42	21,7	≤9,15	4,5	7,0	225,70	642	225,70	642
	12		130	60	21,7	≤9,15	4,5	7,0	267,50	660	267,50	660
	16	11,5	90	30	21,7	≤9,15	4,5	7,0	286,90	630	286,90	630
	16	12,0	100	42	21,7	≤9,15	4,5	7,0	298,00	742	298,00	742
	16	12,0	130	60	21,7	≤9,15	4,5	7,0	356,60	760	356,60	760
	16	12,0	160	85	21,7	≤9,15	4,5	7,0	403,90	685	403,90	685
	20	16,0	110	45	21,7	≤9,15	2,5	7,0	434,50	645	434,50	645
	20	16,0	130	65	21,7	≤9,15	2,5	7,0	437,40	665	437,40	665
28	16	14,3	100	42	27,7 / 24,8	≤10	6,5 / 5	7,0	316,20	842	316,20	842
	16	14,3	130	60	27,7 / 24,8	≤10	6,5 / 5	7,0	376,00	860	376,00	860
	16	14,3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	438,70	885	438,70	885
	20	13,5	104	35	27,7 / 24,8	≤10	6,5 / 5	7,0	391,40	835	391,40	835
	20	14,3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	500,00	985	500,00	985

Key D

Clamping screw

Clamping screw

Spare parts Size		80 950 ... EUR Y7			73 082 ... EUR Y5			73 082 ... EUR Y5	
10	T08	10,05	110				M2,6	3,97	002
14	T10	11,78	112				M3,5	3,97	003
18	T15	11,96	113				M4	3,97	004
22	T20	12,83	114	M5	8,78	006	M5	3,97	005
28	T20	12,83	114				M5	3,97	005

Clamping screw 73 082 006 only for insert 53 009 394

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Circular milling cutter

▲ Steel and carbide versions
▲ Specialised cutting point with four driving slots exclusively for cutting operations in the larger diameter range

Scope of supply:
including key

Mini Mill

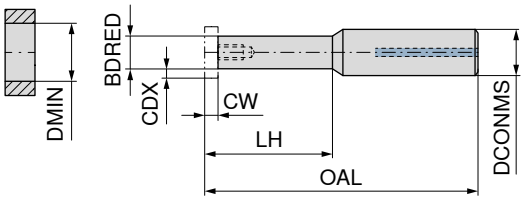

NEW
HM

NEW
Steel

Size	DCONMS $_{h6}$ mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	53 016 ... EUR W1		53 016 ... EUR W1	
50	16		125	60	50	≤6	16,5	7,0	400,30	06000		
	16		155	90	50	≤6	16,5	7,0	429,10	09000		
	16		185	120	50	≤6	16,5	7,0	457,90	12000		
	20	16	100	32	50	≤6	16,5	7,0			199,10	23200

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			73 082 ... EUR Y5	
50	T20	12,83	114	M5	8,78	006

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling inserts for circlip grooves without chamfer

System 300

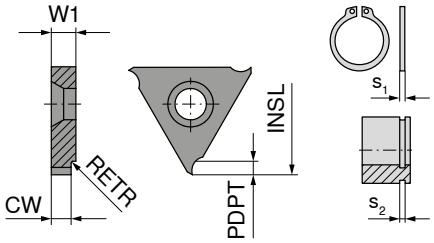

Ti500

Solid carbide

50 853 ...

Size	$s_{2\ H13}$ mm	INSL mm	W1 mm	CW $_{-0,03}$ mm	PDPT mm	RETR mm	s_1 mm	EUR W2	
03	0,90	10,6	2,34	0,98	0,70	0,3	0,80	43,02	302
	1,10	10,6	2,34	1,18	0,90	0,3	1,00	43,02	304
	1,30	10,6	2,34	1,38	1,10	0,3	1,20	43,02	306
	1,60	10,6	2,34	1,68	1,25	0,3	1,50	43,02	308
	1,85	10,6	2,34	1,93	1,25	0,3	1,75	43,02	310
02	0,90	17,5	3,50	0,98	0,70	0,3	0,80	38,83	312
	1,10	17,5	3,50	1,18	0,90	0,3	1,00	38,83	314
	1,30	17,5	3,50	1,38	1,10	0,3	1,20	38,83	316
	1,60	17,5	3,50	1,68	1,25	0,3	1,50	38,83	318
	1,85	17,5	3,50	1,93	1,25	0,3	1,75	38,83	320
	2,15	17,5	3,50	2,23	1,75	0,3	2,00	38,83	322
	2,65	17,5	3,50	2,73	1,75	0,3	2,50	38,83	324
	3,15	17,5	3,50	3,23	2,20	0,3	3,00	38,83	326
01	0,90	23,0	4,00	0,98	0,70	0,3	0,80	38,83	328
	1,10	23,0	4,00	1,18	0,90	0,3	1,00	38,83	330
	1,30	23,0	4,00	1,38	1,10	0,3	1,20	38,83	332
	1,60	23,0	4,00	1,68	1,25	0,3	1,50	38,83	334
	1,85	23,0	4,00	1,93	1,25	0,3	1,75	38,83	336
	2,15	23,0	4,00	2,23	1,75	0,3	2,00	38,83	338
	2,65	23,0	4,00	2,73	1,75	0,3	2,50	38,83	340
	3,15	23,0	4,00	3,23	2,20	0,3	3,00	38,83	342

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Milling inserts for circlip grooves with chamfer

System 300

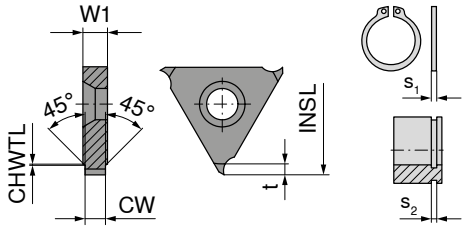

Ti500

Solid carbide

50 852 ...

Size	$s_{2\ H13}$ mm	INSL mm	W1 mm	$CW_{-0,03}$ mm	t mm	CHWTL mm	s_1 mm	EUR W2	
03	1,10	10,6	2,34	1,18	0,50	0,10	1,00	45,49	302
02	1,10	17,5	3,50	1,18	0,50	0,10	1,00	41,28	312
	1,30	17,5	3,50	1,38	0,85	0,15	1,20	41,28	314
	1,60	17,5	3,50	1,68	1,00	0,15	1,50	41,28	316
	1,85	17,5	3,50	1,93	1,25	0,20	1,75	41,28	317
	2,15	17,5	3,50	2,23	1,50	0,20	2,00	41,28	318
	2,65	17,5	3,50	2,73	1,50	0,20	2,50	41,28	319
01	1,10	23,0	4,00	1,18	0,50	0,10	1,00	41,28	320
	1,30	23,0	4,00	1,38	0,70	0,15	1,20	41,28	321
	1,30	23,0	4,00	1,38	0,85	0,15	1,20	41,28	322
	1,60	23,0	4,00	1,68	1,00	0,15	1,50	41,28	324
	1,60	23,0	4,00	1,68	0,85	0,15	1,50	41,28	323
	1,85	23,0	4,00	1,93	1,25	0,20	1,75	41,28	325
	2,15	23,0	4,00	2,23	1,50	0,20	2,00	41,28	326
	2,65	23,0	4,00	2,73	1,75	0,20	2,50	41,28	328
	2,65	23,0	4,00	2,73	1,50	0,20	2,50	41,28	327
	3,15	23,0	4,00	3,32	1,75	0,20	3,00	41,28	329

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuSet – Milling inserts without profile, ground ready-for-use

System 300



Ti500

Solid carbide

Size	CW $^{+0,02}$ mm	PDPT mm	INSL mm	W1 mm	50 851 ... EUR W2	
03	2,34	1,60	10,6	2,34	43,02	304
	3,00	1,60	10,6	3,00	45,49	306
02	3,50	2,60	17,5	3,50	38,83	312
	5,00	2,60	17,5	5,00	45,49	314
	6,00	2,60	17,5	6,00	50,26	316
01	4,00	3,45	23,0	4,00	47,83	322 1)
	6,50	3,45	23,0	6,50	47,83	324 1)

P	●
M	●
K	●
N	●
S	●
H	○
O	●

1) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 82

ModuSet – Milling inserts for chamfering and deburring

System 300



Ti500

Solid carbide

Size	PDPT mm	INSL mm	W1 mm	50 857 ... EUR W2	
03	1,50	10,6	3,0	43,02	304
02	2,50	17,5	5,0	43,02	314
01	3,25	23,0	6,5	43,02	322 1)

P	●
M	●
K	●
N	●
S	●
H	○
O	●

1) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Thread milling insert – Partial profile





Solid carbide

Size	TP mm	INSL mm	W1 mm	50 855 ... EUR W2	
02	1 - 3,5	17,5	3,5	47,83	314
01	1 - 4,0	23,0	4,0	47,83	324

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 82

ModuSet – Thread milling insert – Full profile





Solid carbide

Size	TP mm	INSL mm	W1 mm	PDPT mm	50 859 ... EUR W2	
03	1,0	10,6	2,34	0,578	59,25	304
	1,5	10,6	2,34	0,864	59,25	308
	2,0	10,6	2,34	1,159	59,25	310
02	1,0	17,5	3,50	0,578	59,25	311
	1,5	17,5	3,50	0,864	59,25	312
	2,0	17,5	3,50	1,159	59,25	314
	2,5	16,0	3,50	1,444	63,75	317 1)
	2,5	17,5	3,50	1,444	59,25	316
	3,0	17,5	3,50	1,728	73,02	318
01	1,0	23,0	4,00	0,578	61,44	320
	1,5	23,0	4,00	0,864	61,44	322
	2,0	23,0	4,00	1,159	61,44	324
	2,5	23,0	4,00	1,444	61,44	326
	3,0	23,0	4,00	1,728	61,44	328
	3,5	23,0	4,00	2,023	61,44	330
	4,0	23,0	4,00	2,308	61,44	332
	4,5	23,0	6,50	2,602	70,70	334
	5,0	23,0	6,50	2,887	70,70	336
	6,0	23,0	6,50	3,467	70,70	338 2)

P	●
M	●
K	●
N	●
S	●
H	○
O	●

1) M20x2,5 – profile corrected
2) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 82

ModuSet – Thread milling insert – Full profile

System 300 | G | BSW | BSF | 55°



Ti500

Solid carbide

Size	TP mm	TPI 1/"	INSL mm	W1 mm	PDPT mm	50 858 ... EUR W2	
02	1,814	14	17,5	3,5	1,162	59,25	314
	2,309	11	17,5	3,5	1,494	59,25	312
01	2,309	11	23,0	4,0	1,494	61,44	322

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 82

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuSet – Circular milling cutter

▲ Size refers to milling inserts

Scope of supply:
including key

System 300

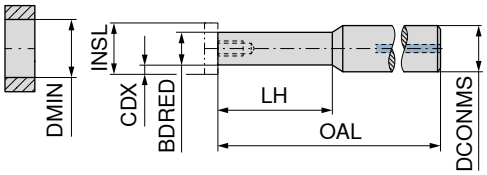

Size	INSL mm	CDX mm	LH mm	DCONMS $_{h6}$ mm	OAL mm	BDRED mm	DMIN mm	torque moment Nm	50 800 ... EUR W1	
03	10,6	1,60	17,2	10	57,20	7,4	11	0,9	164,00	020 [1]
	10,6	1,60	34,2	10	74,20	7,4	11	0,9	242,30	025 [2]
02	17,5	2,60	28,7	12	74,05	12,0	20	3,8	173,50	030
	17,5	2,60	63,7	12	108,70	12,0	20	3,8	383,00	045 [2]
01	23,0	3,45	38,5	16	87,00	16,1	25	5,5	180,40	050
	23,0	3,45	67,5	16	116,00	16,1	25	5,5	189,90	070
	23,0	3,00	88,5	16	137,00	17,0	25	5,5	423,50	090 [2]

1) Without Through Coolant
2) Carbide version

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			70 960 ... EUR 2A	
03	T06 - IP	13,39	123	M2x9	5,39	232
02	T15 - IP	15,33	128	M4x12,3	8,10	233
01	T20 - IP	16,17	129	M5x15	8,10	234

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuThread – Thread milling insert

▲ Can be used on both sides (except for INSL 10.4)

MWN | M | MF | 60°



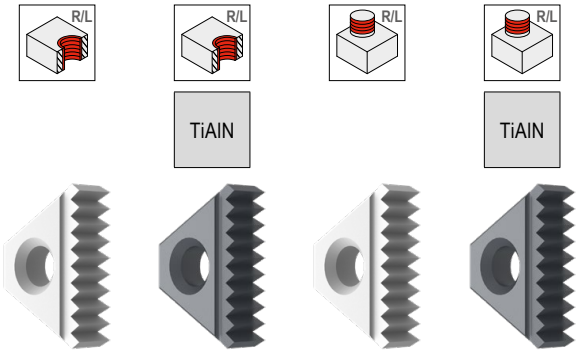

Solid carbide | Solid carbide | Solid carbide | Solid carbide

INSL mm	TP mm	50 890 ... EUR W2		50 890 ... EUR W2		50 891 ... EUR W2		50 891 ... EUR W2	
10,4	0,50	79,53	100						
	0,75	79,53	101						
	1,00	63,75	102	77,21	302				
	1,25	63,75	103						
	1,50	63,75	104	77,21	304				
11,0	0,50	55,04	120						
	0,75	69,38	121						
	1,00	55,04	122	67,07	322				
	1,25	55,04	123						
	1,50	55,04	124	65,90	324				
16,0	0,50	81,12	140						
	0,75	64,62	141						
	1,00	64,62	142	83,29	342	64,62	142	78,80	342
	1,25	64,62	143			64,62	143		
	1,50	64,62	144	78,80	344	64,62	144	78,80	344
	1,75	64,62	145			64,62	145		
	2,00	64,62	146	78,80	346	64,62	146	78,80	346
27,0	1,00	123,70	162	144,00	362	123,70	162	144,00	362
	1,25	123,70	163			123,70	163		
	1,50	123,70	164	144,00	364	123,70	164	144,00	364
	1,75	123,70	165						
	2,00	123,70	166	144,00	366	123,70	166	144,00	366
	2,50	123,70	167			123,70	167		
	3,00	123,70	168	144,00	368	123,70	168	144,00	368
	3,50	123,70	169			123,70	169		
	4,00	123,70	170			123,70	170		

P	●	●	●	●
M	○	●	○	●
K	●	●	●	●
N	●	●	●	●
S				
H				
O	●	○	●	○

→ v_c/f_z Page 81

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert

▲ Can be used on both sides (except for INSL 10.4)







Solid carbide

50 895 ...

INSL mm	TPI 1/"	TP mm	EUR W2	
10,4	19	1,337	77,21	300
16,0	14	1,814	77,21	342
	11	2,309	77,21	344
27,0	11	2,309	176,70	366

P	●
M	●
K	●
N	●
S	
H	
O	○

→ v_c/f_z Page 81

7

ModuThread – Thread milling insert

▲ Can be used on both sides (except for INSL 10.4)







Solid carbide

50 892 ...

INSL mm	TPI 1/"	TP mm	EUR W2	
10,4	20	1,270	63,75	100
	18	1,411	63,75	102
16,0	16	1,588	64,62	144
	12	2,117	64,62	146
27,0	12	2,117	123,70	166
	8	3,175	123,70	168

P	●
M	○
K	●
N	●
S	
H	
O	●

→ v_c/f_z Page 81

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert

▲ double sided







Solid carbide

INSL mm	TPI 1/"	TP mm	50 896 ... EUR W2	
16	18	1,411	77,64	142
	16	1,588	64,62	144

P	●
M	○
K	●
N	●
S	
H	
O	●

→ v_c/f_z Page 81

ModuThread – Thread milling insert

▲ double sided







Solid carbide

INSL mm	TPI 1/"	TP mm	50 897 ... EUR W2	
16	14,0	1,814	64,62	142
	11,5	2,209	64,62	144
27	11,5	2,209	123,70	164
	8,0	3,175	123,70	166

P	●
M	○
K	●
N	●
S	
H	
O	●

→ v_c/f_z Page 81

Note! Thread milling inserts are marked R (right-hand thread) and L (left-hand thread). The standard tool holder cannot be used to produce a left-hand thread! Tool holder for left-hand thread available on special request.

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Circular milling cutter

▲ INSL refers to milling inserts

Scope of supply:
includes key

MWN	M	MF	G
	Pg	UN	

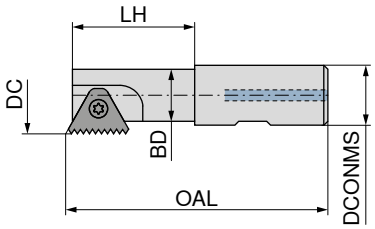

50 843 ...

INSL mm	BD mm	LH mm	DCONMS mm	OAL mm	DC mm	torque moment Nm	EUR W1	
10,4	6,8	12	12	69	9,0	0,9	228,50	101
	6,8	17	20	84	9,0	0,9	242,00	102
11,0	8,9	12	12	70	11,5	1,2	228,50	111
	8,9	20	20	85	11,5	1,2	242,00	112
16,0	13,6	22	16	90	17,0	2,5	266,20	161
	16,6	43	20	95	20,0	2,5	266,20	162
	18,6	25	25	125	22,0	2,5	332,60	163
27,0	24,0	52	25	110	30,0	9,0	336,60	271
	31,0	58	32	120	37,0	9,0	362,30	273
	24,0	92	25	150	30,0	9,0	388,00	272
	31,0	98	32	160	37,0	9,0	450,10	274

7

Pilot hole diameter for circular end mill 50 843 ...

BD	TP in mm									
	0,5 mm 48 G/"	0,75 mm 32 G/"	1,0 mm 24 G/"	1,25 mm 20 G/"	1,5 mm 16 G/"	2,0 mm 12 G/"	2,5 mm 10 G/"	3,0 mm 8 G/"	3,5 mm 7 G/"	4,0 mm 6 G/"
6,8	9,5	10	10,7	11,4	12					
8,9	12	12,5	13,2	13,9	14,5					
13,6	17,6	18,2	19	19,6	20	21				
16,6	20,7	21,4	22	22,6	23	24				
18,6	22,7	23,4	24	24,6	25	26				
24,0	30,7	31,4	32	32,8	33,5	34,6	36,6	39	42	45
31,0	38	38,6	39,5	40,4	41	42	44	46,5	49	52

Key D

Clamping screw

80 950 ...

70 950 ...

Spare parts INSL		EUR Y7			EUR 2A	
10,4	T07	10,05	109	M2,2x5,0	2,44	200
11	T08	10,05	110	M2,6x6,5	2,44	201
16	T10	11,78	112	UNC5-40 x 8	2,44	202
27	T25	13,18	115	M5x15	3,77	203

ModuThread – Circular milling cutter

▲ INSL refers to milling inserts

Scope of supply:
includes key

MWN | NPT

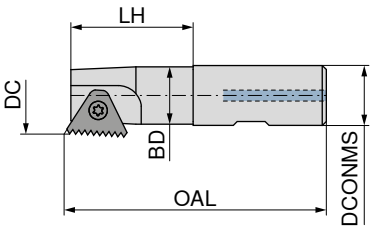

50 844 ...

INSL mm	BD mm	Thread	LH mm	DCONMS h6 mm	OAL mm	DC mm	torque moment Nm	EUR W1	
16	12,5	NPT 1/2	22	16	90	15,5	2,5	242,00	161
	15,0	NPT 3/4 - 1 1/4	23	20	85	19,0	2,5	265,00	162
27	24,0	NPT 1 1/2 - 2	52	25	110	30,0	9,0	336,60	271
	31,0	NPT > 2	58	32	120	37,0	9,0	362,30	272

Key D

80 950 ...

Clamping screw

70 950 ...

Spare parts INSL		EUR Y7			EUR 2A	
16	T10	11,78	112	UNC5-40 x 8	2,44	202
27	T25	13,18	115	M5x15	3,77	203

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert





Ti500

Solid carbide

50 863 ...

DC mm	TP mm	W1 mm	APMX mm	NT	EUR W2	
12	1,0	7,5	12,0	13	56,78	300
	1,5	7,5	10,5	8	56,78	302
17	1,0	11,0	16,0	17	56,78	310
	1,5	11,0	16,5	12	56,78	312
	2,0	11,0	16,0	9	56,78	314
20	1,0	7,5	12,0	13	56,78	320
	1,5	7,5	10,5	8	56,78	322
25	1,0	11,0	16,0	17	56,78	330
	1,5	11,0	16,5	12	56,78	332
	2,0	11,0	16,0	9	56,78	334

P	●
M	●
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 81

7

ModuThread – Thread milling insert





Ti500

Solid carbide

50 864 ...

DC mm	TPI 1/"	W1 mm	APMX mm	NT	EUR W2	
12	14	7,5	9,07	6	56,78	300
17	14	11,0	16,33	10	73,02	312 [1]
	14	11,0	16,33	10	73,02	314 [2]
	11	11,0	16,16	8	73,02	310
25	14	11,0	16,33	10	73,02	332
	11	11,0	16,16	8	73,02	330

P	●
M	●
K	●
N	●
S	
H	
O	

1) Thread: 5/8 – 3/4 – 7/8
2) 1/2" Profile corrected

→ v_c/f_z Page 81

ModuThread – Circular milling cutter

Scope of supply:
includes key

GZD

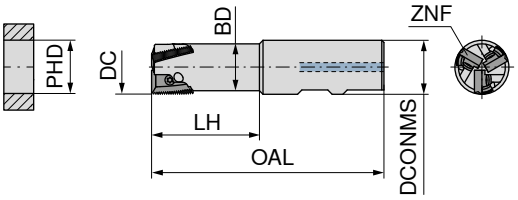

DC mm	LH mm	DCONMS h6 mm	OAL mm	BD mm	ZNF	PHD mm	torque moment Nm	50 842 ... EUR W1	
12	18	16	74,0	9,4	1	14	1,1	224,10	121
17	30	16	79,0	13,7	1	19	3,8	224,10	171
20	32	20	83,0	17,5	3	22	1,1	267,80	201
25	50	25	107,6	21,7	3	26	3,8	351,20	251
	85	25	142,6	21,7	3	26	3,8	940,20	252 1)

1) Heavy metal version with mounted head

Key D

Clamping screw

Spare parts DC	80 950 ...	EUR Y7		70 960 ...	EUR 2A	
12	T08 - IP	13,16	125	M2,5x6,5	5,39	244
17	T15 - IP	15,33	128	M4x7,5	5,39	245
20	T08 - IP	13,16	125	M2,5x6,5	5,39	244
25	T15 - IP	15,33	128	M4x7,5	5,39	245

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert

GZG | M | MF | 60°

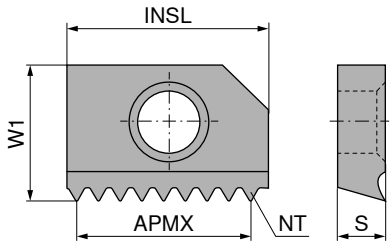

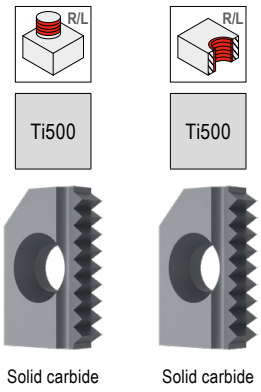

Solid carbide — Solid carbide

INSL mm	TP mm	W1 mm	APMX mm	S mm	NT	50 887 ... EUR W2		50 885 ... EUR W2	
14,5	0,50	10,0	13,50	3,18	28			88,63	350
	0,75	10,0	13,50	3,18	19			88,63	352
	1,00	10,0	13,00	3,18	14	68,37	304	52,14	354
	1,25	10,0	12,50	3,18	11			68,37	356
	1,50	10,0	12,00	3,18	9	68,37	308	52,14	358
	1,75	10,0	12,25	3,18	8			68,37	360
	2,00	10,0	12,00	3,18	7	68,37	312	52,14	362
	2,50	10,0	10,00	3,18	5			61,44	364
	2,50	10,0	10,00	3,18	5			61,44	366 1)
15,0	3,00	10,5	12,00	3,18	5			73,02	370 2)
	3,50	10,5	10,50	3,18	4			73,02	372 2)
21,0	1,00	10,0	19,00	3,18	20			59,25	380
	1,50	10,0	19,50	3,18	14			59,25	382
	1,50	10,0	18,00	3,18	13	68,37	320		
	2,00	10,0	18,00	3,18	10			59,25	384
26,0	1,50	15,0	24,00	5,00	17			100,20	390
	2,00	15,0	24,00	5,00	13			100,20	392
	3,00	15,0	21,00	5,00	8			100,20	396
	3,50	15,0	20,00	5,00	7			147,70	398
	4,00	15,0	20,00	5,00	6			147,70	400
P						●		●	
M						●		●	
K						●		●	
N						●		●	
S									
H									
O									

1) M20x2,5 – profile corrected
2) Without chamfer

→ v_c/f_z Page 81

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuThread – Thread milling insert



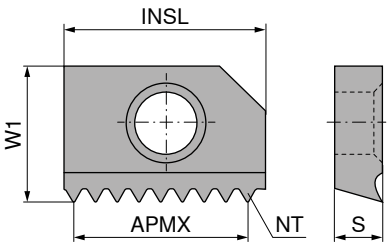

Ti500

Solid carbide

50 888 ...

INSL mm	TPI 1/"	TP mm	W1 mm	APMX mm	S mm	NT	EUR W2	
14,5	18	1,411	10	11,28	3,18	9	56,78	310
	16	1,587	10	11,11	3,18	8	56,78	312
	14	1,814	10	12,69	3,18	8	56,78	314
	12	2,116	10	10,58	3,18	6	56,78	316
	11	2,309	10	11,54	3,18	6	56,78	318
21,0	14	1,814	10	18,14	3,18	11	68,37	320
	11	2,309	10	18,47	3,18	9	68,37	322
26,0	11	2,309	15	23,09	5,00	11	109,20	330

P	●
M	●
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 81

ModuThread – Thread milling insert



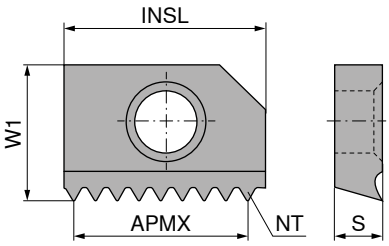

Ti500

Solid carbide

50 894 ...

INSL mm	TPI 1/"	TP mm	W1 mm	APMX mm	S mm	NT	EUR W2	
14,5	18	1,411	10	12,69	3,18	10	81,84	302
	16	1,587	10	11,11	3,18	8	81,84	304

P	●
M	●
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 81

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert



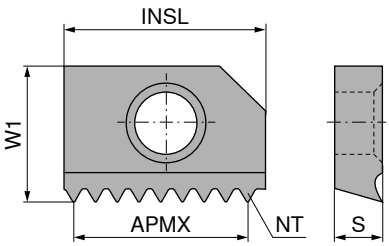

Solid carbide

50 889 ...

INSL mm	TPI 1/"	TP mm	W1 mm	APMX mm	S mm	NT	EUR W2	
14,5	18	1,411	10	12,69	3,18	10	84,33	310
	16	1,587	10	12,70	3,18	9	84,33	312
21,0	16	1,587	10	19,05	3,18	13	102,40	320
	14	1,814	10	18,14	3,18	11	102,40	322
	12	2,116	10	18,04	3,18	10	102,40	324

P	●
M	●
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 81

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuThread – Circular milling cutter

▲ INSL refers to milling inserts

Scope of supply:
includes key

GZG

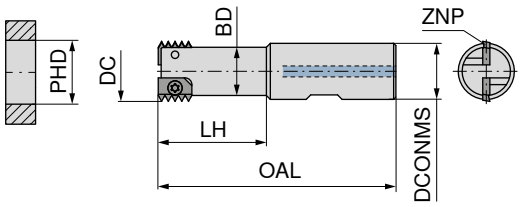

INSL mm	DC mm	LH mm	DCONMS $_{h6}$ mm	OAL mm	BD mm	ZNP	PHD mm	torque moment Nm	50 841 ... EUR W1	
14,5	16	30,0	16	78	12,7	1	18,5	3,8	205,00	016
	16	50,0	16	98	12,7	1	18,5	3,8	326,00	017 1)
	20	60,0	20	110	16,8	1	23,0	3,8	243,30	020
	25	48,2	25	106	21,5	2	30,0	3,8	363,50	025
	25	92,2	25	150	21,5	2	30,0	3,8	791,20	026 1)
15,0	18	30,0	16	79	12,7	1	20,0	3,8	224,10	218
	22	60,0	20	110	16,8	1	26,0	3,8	243,30	222
	27	48,2	25	106	21,5	2	32,0	3,8	363,50	227
21,0	16	31,3	20	85	12,7	1	18,5	3,8	213,30	316
	22	32,8	25	92	18,7	1	26,0	3,8	224,10	322
	22	62,8	25	122	18,7	1	26,0	3,8	780,00	323 1)
	28	38,3	32	102	24,7	2	35,0	3,8	414,10	328
	28	78,3	32	142	24,5	2	35,0	3,8	1.166,00	327 1)
26,0	25	48,5	25	107	20,0	1	30,0	3,8	288,30	125

1) Heavy metal version

Key D

Clamping screw

Spare parts for Article no.	80 950 ...	EUR Y7		70 960 ...	EUR 2A	
50 841 016	T15 - IP	15,33	128	M4x6,9	8,10	237
50 841 017	T15 - IP	15,33	128	M4x6,9	8,10	237
50 841 020	T15 - IP	15,33	128	M4x7,5	5,39	245
50 841 025	T15 - IP	15,33	128	M4x8	8,10	242
50 841 026	T15 - IP	15,33	128	M4x8	8,10	242
50 841 218	T15 - IP	15,33	128	M4x6,9	8,10	237
50 841 222	T15 - IP	15,33	128	M4x6,9	8,10	237
50 841 227	T15 - IP	15,33	128	M4x8	8,10	242
50 841 316	T15 - IP	15,33	128	M4x6,9	8,10	237
50 841 322	T15 - IP	15,33	128	M4x6,9	8,10	237
50 841 323	T15 - IP	15,33	128	M4x8	8,10	242
50 841 328	T15 - IP	15,33	128	M4x8	8,10	242
50 841 327	T15 - IP	15,33	128	M4x8	8,10	242
50 841 125	T15 - IP	15,33	128	M4x11,5	8,10	241

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert – partial profile

EAW | M | UN | 60°

R/L



TiN

Solid carbide

50 867 ...

DC mm	TP mm	TPI 1/"	CW mm	INSL mm	EUR W2	
16,5	1,5 - 3,0	16 - 10	5	7,0	69,09	**115**
18	2,5 - 3,5	10 - 7	5	7,8	69,09	**225**

G | 55°

Solid carbide

50 868 ...

DC mm	TP mm	TPI 1/"	CW mm	INSL mm	EUR W2	
16,5	1,814	14	5	7	84,61	**114**

7

ModuThread – Thread milling insert – partial profile

EAW | M | UN | 60°

R/L



TiN



Solid carbide

50 860 ...

DC mm	TP mm	TPI 1/"	CW mm	INSL mm	EUR W2	
23,85	1,5 - 2,5	16 - 10	6,35	9,52	51,86	**315**
23,85	2,5 - 4,0	10 - 6	6,35	9,52	51,86	**325**
32,85	1,5 - 2,5	16 - 10	8,50	13,50	58,54	**415**
32,85	2,5 - 5,5	10 - 4,5	8,50	13,50	58,54	**425**

G | 55°

Solid carbide

50 861 ...

DC mm	TP mm	TPI 1/"	CW mm	INSL mm	EUR W2	
23,85	2,309	11	6,35	9,52	58,54	**311**
32,85	2,309	11	8,50	13,50	68,37	**411**

P	●
M	●
K	●
N	●
S	●
H	○
O	○

→ v_c/f_z Page 81

ModuThread – Circular milling cutter

Scope of supply:
including key

EAW

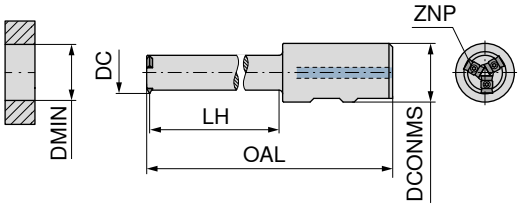

DC mm	DMIN mm	TP mm	TPI 1/"	LH mm	DCONMS $_{h6}$ mm	OAL mm	ZNP	torque moment Nm	50 848 ... EUR W1	
16,5 / 18,0	17,5 / 19,0	1,5 - 3,5	16 - 10	60	20	114	2	0,9	416,40	**020**
23,85	25,5	1,5 - 4,0	24 - 6	90	32	154	3	0,9	490,70	**030**
32,85	35,0	1,5 - 5,5	16 - 4,5	115	32	179	3	2,5	508,20	**040**

Key D

Clamping screw

Spare parts for Article no.	80 950 ...			70 950 ...		
		EUR Y7			EUR 2A	
50 848 020	T07 - IP	13,18	**124**	M2,5x8,5	13,43	**739**
50 848 030	T07 - IP	13,18	**124**	M2,5x8,5	13,43	**739**
50 848 040	T09 - IP	14,50	**126**	M3x11	13,43	**740**

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

ModuThread – Thread milling insert – partial profile







Solid carbide

50 870 ...

DC mm	TP mm	TPI 1/"	CW mm	INSL mm	EUR W2	
40,25	1,5 - 3,0	16 - 9	9,5	15,50	66,20	**515**
40,25	3,0 - 6,0	9 - 4	9,5	15,50	66,20	**530**
52,55 / 66,55	1,5 - 3,0	16 - 9	12,5	19,00	73,29	**615**
52,55 / 66,55	3,0 - 6,0	9 - 4	12,5	19,00	73,29	**630**
92	6,0 - 8,0	4	14,3	28,58	117,00	**760**

P	●
M	●
K	●
N	●
S	●
H	○
O	○

→ v_c/f_z Page 81

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

ModuThread – Circular milling cutter

Scope of supply:
including key

EWM

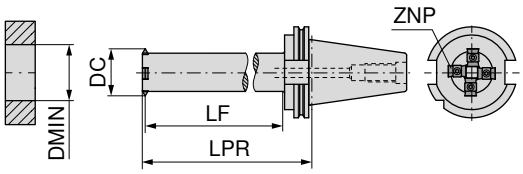

DIN 69871

DC mm	DMIN mm	TP mm	TPI 1/"	LF mm	LPR mm	Adapter	ZNP	torque moment Nm	50 849 ... EUR W1	
40,25	43,0	1,5 - 6,0	16 - 4,0	145	178,7	SK 50	4	5,5	1.054,00	**148**
40,25	43,0	1,5 - 6,0	16 - 4,0	145	178,7	SK 40	4	5,5	1.023,00	**048**
52,55	56,0	1,5 - 6,0	16 - 4,0	195	229,2	SK 50	4	8,0	1.204,00	**164**
66,55	70,5	1,5 - 6,0	16 - 4,0	260	296,2	SK 50	7	8,0	1.656,00	**080**
92,00	100,0	6,0 - 8,0	4,0	360	395,0	SK 50	7	8,0	1.928,00	**115**

Key D

Clamping screw

Spare parts DC		80 950 ... EUR Y7			70 950 ... EUR 2A	
40,25	T15 - IP	15,33	**128**	M4x13	13,43	**741**
52,55 - 92	T20 - IP	16,17	**129**	M5x15	13,43	**742**

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Solid Carbide Circular End Milling Cutter

Micro Mill

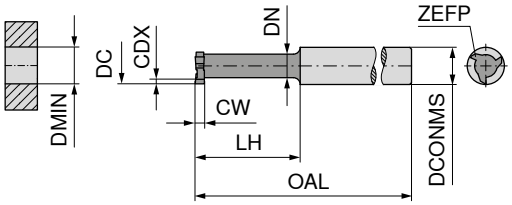

CWX500

Solid carbide

53 050 ...

DC mm	CW ±0,02 mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS h6 mm	ZEFP	DMIN mm	EUR W1	
5,8	0,7	0,8	15,2	58	3,8	6	3	6	73,59	070
	0,8	0,8	15,2	58	3,8	6	3	6	73,59	080
	0,9	0,8	15,2	58	3,8	6	3	6	73,59	090
	1,0	0,8	15,2	58	3,8	6	3	6	73,59	100
	1,5	0,8	15,2	58	3,8	6	3	6	73,59	150
7,8	0,7	1,2	25,4	68	5,0	8	3	8	92,85	170
	0,8	1,2	25,4	68	5,0	8	3	8	92,85	180
	0,9	1,2	25,4	68	5,0	8	3	8	92,85	190
	1,0	1,2	25,4	68	5,0	8	3	8	92,85	200
	1,5	1,2	25,4	68	5,0	8	3	8	92,85	250
	2,0	1,2	25,4	68	5,0	8	3	8	92,85	300

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 83

7

MonoThread – Solid Carbide Circular End Milling Cutter

Micro Mill

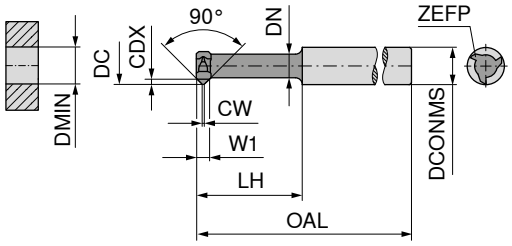

CWX500

Solid carbide

53 051 ...

DC mm	W1 mm	CW mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS h6 mm	ZEFP	DMIN mm	EUR W1	
5,8	2	0,2	0,8	15	58	4,2	6	3	6	70,98	010
	2	0,2	0,8	25	68	4,2	6	3	6	90,11	020
7,8	2	0,2	1,2	25	68	5,0	8	3	8	109,40	110
	2	0,2	1,2	35	78	5,0	8	3	8	115,20	120

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 83

MonoThread – Solid Carbide Circular Thread Milling Cutter – Full profile

▲ Profile corrected



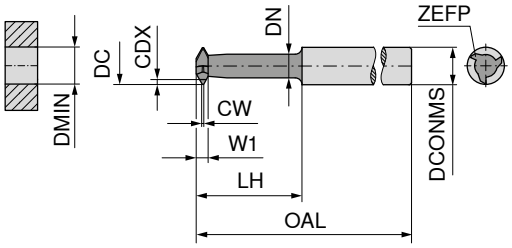

Solid carbide

53 052 ...

DC mm	Thread	TP mm	W1 mm	CW mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS h6 mm	ZEFP	DMIN mm	EUR W1	
1,18	M1,6	0,35	0,40	0,04	0,19	4,0	32	0,64	3	3	1,38	86,47	**160**
1,38	M1,8	0,35	0,50	0,04	0,19	5,0	32	0,70	3	3	1,58	85,45	**180**
1,50	M2	0,40	0,56	0,05	0,22	5,0	32	0,90	3	4	1,70	95,18	**200**
1,95	M2,5	0,45	0,60	0,06	0,25	6,0	32	1,15	3	4	2,15	94,16	**250**
2,40	M3	0,50	0,60	0,06	0,27	7,0	32	1,60	3	4	2,60	93,28	**300**
2,80	M3,5	0,60	0,74	0,08	0,33	8,0	32	1,80	3	4	3,00	91,27	**350**
3,10	M4	0,70	0,82	0,09	0,38	9,0	44	1,98	5	4	3,30	99,08	**400**
3,60	M5	0,80	0,98	0,10	0,43	10,0	44	2,20	5	4	3,80	96,19	**500**
4,10	M6	1,00	0,98	0,13	0,54	12,2	44	2,70	5	4	4,30	94,16	**600**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 83

MonoThread – Solid Carbide Circular Thread Milling Cutter – Partial profile



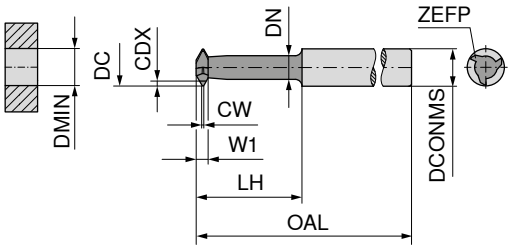

Solid carbide

53 053 ...

DC mm	TP mm	W1 mm	CW mm	CDX mm	LH mm	OAL mm	DN mm	DCONMS h6 mm	ZEFP	DMIN mm	EUR W1	
5,8	0,5 - 1,5	2	0,06	0,91	15,2	58	3,5	6	3	6	76,79	**010**
7,8	0,5 - 1,5	2	0,06	0,91	25,4	68	5,5	8	3	8	101,70	**110**
7,8	1,0 - 2,0	2	0,12	1,19	25,4	68	5,0	8	3	8	101,70	**120**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 83

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Drill thread milling cutter with chamfer facet

▲ Profile corrected



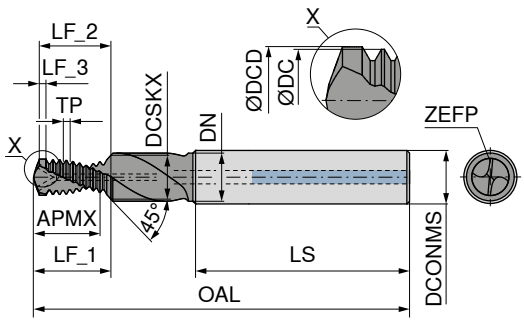

Ti601

Solid carbide

Solid carbide

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCD mm	DCSKX mm	DN mm	LF_1 mm	LF_2 mm	LF_3 mm	ZEFP	50 869 ... EUR W1/5D		50 854 ... EUR W1/5D	
2,45	M3	88901001000013	0,50	49	5,8	36	6	2,5	3,3	4,5	6,8	6,4	0,5	2	242,00	**03000**[1]		
2,45	M3	88906001000013	0,50	49	5,8	36	6	2,5	3,3	4,5	6,8	6,4	0,5	2			259,70	**03000**[1]
3,24	M4	88941001000015	0,70	49	7,3	36	6	3,3	4,3	4,5	9,4	8,9	0,7	2	272,10	**04000**		
3,24	M4	88935001000015	0,70	49	7,3	36	6	3,3	4,3	4,5	9,4	8,9	0,7	2			307,60	**04000**
4,10	M5	88941001000017	0,80	55	9,2	36	6	4,2	5,3	5,5	11,7	11,0	0,8	2	267,90	**05000**		
4,10	M5	88935001000017	0,80	55	9,2	36	6	4,2	5,3	5,5	11,7	11,0	0,8	2			304,80	**05000**
4,85	M6	88941001000018	1,00	62	11,4	36	8	5,0	6,3	6,6	14,5	13,7	1,0	2	267,90	**06000**		
4,85	M6	88935001000018	1,00	62	11,4	36	8	5,0	6,3	6,6	14,5	13,7	1,0	2			304,80	**06000**
6,45	M8	88941001000020	1,25	74	14,2	40	10	6,8	8,3	9,0	18,2	17,1	1,3	2	318,40	**08000**		
6,45	M8	88935001000020	1,25	74	14,2	40	10	6,8	8,3	9,0	18,2	17,1	1,3	2			354,10	**08000**
8,08	M10	88941001000022	1,50	79	18,5	45	12	8,5	10,3	11,0	23,4	22,1	1,5	2	358,10	**10000**		
8,08	M10	88935001000022	1,50	79	18,5	45	12	8,5	10,3	11,0	23,4	22,1	1,5	2			427,80	**10000**
9,74	M12	88941001000024	1,75	89	21,6	45	14	10,3	12,3	13,5	27,1	25,5	1,5	2	488,10	**12000**		
9,74	M12	88935001000024	1,75	89	21,6	45	14	10,3	12,3	13,5	27,1	25,5	1,5	2			571,30	**12000**
11,35	M14	88941001000025	2,00	102	26,6	48	16	12,0	14,3	15,5	32,8	30,9	1,5	2	605,50	**14000**		
11,35	M14	88935001000025	2,00	102	26,6	48	16	12,0	14,3	15,5	32,8	30,9	1,5	2			650,60	**14000**
13,28	M16	88941001000026	2,00	102	30,6	48	18	14,0	16,3	17,5	37,1	35,0	1,5	2	706,70	**16000**		
13,28	M16	88935001000026	2,00	102	30,6	48	18	14,0	16,3	17,5	37,1	35,0	1,5	2			761,40	**16000**

1) Without Through Coolant

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCD mm	DCSKX mm	DN mm	LF_1 mm	LF_2 mm	LF_3 mm	ZEFP	50 869 ... EUR W1/5D		50 854 ... EUR W1/5D	
6,79	M8x1	88935002000070	1,0	74	15,40	40	10	7,0	8,3	9,0	18,8	17,7	1,0	2			406,10	**08100**
6,79	M8x1	88941002000070	1,0	74	15,40	40	10	7,0	8,3	9,0	18,8	17,7	1,0	2	369,00	**08100**		
8,75	M10x1	88941002000094	1,0	79	19,40	45	12	9,0	10,3	11,0	23,2	21,8	1,0	2	397,70	**10100**		
8,75	M10x1	88935002000094	1,0	79	19,40	45	12	9,0	10,3	11,0	23,2	21,8	1,0	2			467,50	**10100**
10,74	M12x1	88935002000111	1,0	89	22,40	45	14	11,0	12,3	13,5	26,4	24,8	1,0	2			597,30	**12100**
10,06	M12x1,5	88935002000113	1,5	89	23,01	45	14	10,5	12,3	13,5	28,2	26,6	1,5	2			597,30	**12200**
10,06	M12x1,5	88941002000113	1,5	89	23,01	45	14	10,5	12,3	13,5	28,2	26,6	1,5	2	548,10	**12200**		

P		
M		
K	○	●
N	●	○
S		
H		
O	●	○

→ v_c/f_z Page 78

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

MonoThread – Drill thread milling cutter with chamfer facet

▲ Profile corrected



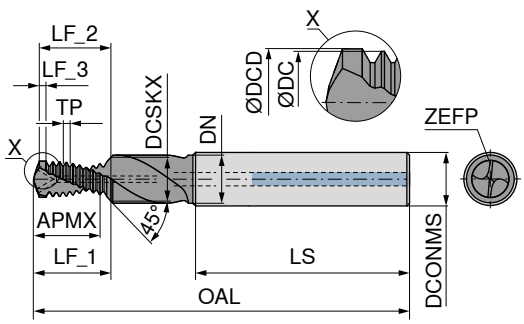

Ti601

Solid carbide | Solid carbide

															50 898 ...		50 862 ...	
DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCD mm	DCSKX mm	DN mm	LF_1 mm	LF_2 mm	LF_3 mm	ZEFP	EUR W1/5D		EUR W1/5D	
4,10	M5	88961001000017	0,80	55	11,57	36	6	4,2	5,3	5,5	14,1	13,4	0,8	2	267,90	**05000**		
4,85	M6	88961001000018	1,00	62	13,40	36	8	5,0	6,3	6,6	16,5	15,7	1,0	2	267,90	**06000**		
4,85	M6	88956001000018	1,00	62	13,40	36	8	5,0	6,3	6,6	16,5	15,7	1,0	2			304,80	**06000**
6,45	M8	88961001000020	1,25	74	19,20	40	10	6,8	8,3	9,0	23,2	22,1	1,3	2	318,40	**08000**		
6,45	M8	88956001000020	1,25	74	19,20	40	10	6,8	8,3	9,0	23,2	22,1	1,3	2			354,10	**08000**
8,08	M10	88961001000022	1,50	79	23,00	45	12	8,5	10,3	11,0	27,9	26,6	1,5	2	358,10	**10000**		
8,08	M10	88956001000022	1,50	79	23,00	45	12	8,5	10,3	11,0	27,9	26,6	1,5	2			427,80	**10000**
9,74	M12	88961001000024	1,75	89	28,60	45	14	10,3	12,3	13,5	34,1	32,5	1,5	2	488,10	**12000**		
9,74	M12	88956001000024	1,75	89	28,60	45	14	10,3	12,3	13,5	34,1	32,5	1,5	2			571,30	**12000**
P																		
M																		
K																○		●
N																●		○
S																		
H																		
O																●		○

→ v_c/f_z Page 78

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Circular Thread Milling Cutter

▲ Note: left-hand cutting (M04)
▲ Profile corrected



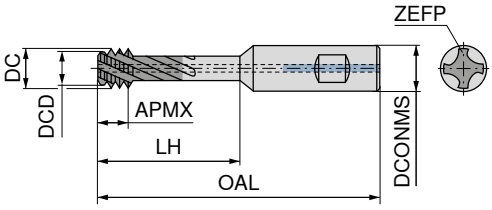

Solid carbide

50 840 ...

DC mm	Thread	TP mm	APMX mm	LH mm	DCONMS mm	DCD mm	OAL mm	ZEFP	EUR W1	
2,3	M3x0,5	0,50	2,0	7,0	6	2,10	51	4	212,30	**030** 1)
3,0	M4x0,7	0,70	2,8	9,4	6	2,60	51	4	212,50	**040** 1)
3,8	M5x0,8	0,80	3,2	11,6	6	3,40	51	4	210,70	**050** 1)
4,6	M6x1 - M7x1	1,00	4,0	14,0	8	4,10	60	4	210,60	**060** 1)
6,2	M8x1,25 - M10x1,25	1,25	5,0	19,0	10	5,60	71	4	226,80	**080**
7,8	M10x1,5 - M12x1,5	1,50	6,0	25,0	10	7,00	76	4	244,50	**100**
9,2	M12x1,75	1,75	7,0	31,0	12	8,30	86	4	259,90	**120**
11,1	M14x2 - M16x2	2,00	8,0	36,0	16	10,04	98	4	284,00	**140**

P	
M	
K	
N	
S	○
H	●
O	○

1) Without Through Coolant

→ v_c/f_z Page 78

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

Caution: left-hand cutting (M04) → spindle rotation left!

MonoThread – Thread Milling Cutter

▲ Available on request from M3



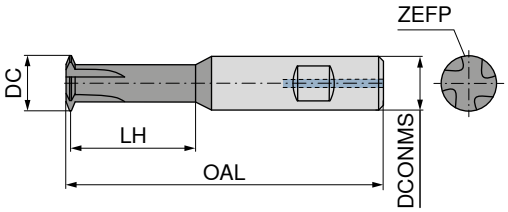

NEW NEW

TiCN TiCN

Solid carbide Solid carbide

DC mm	Thread	TP mm	LH mm	DCONMS $_{h6}$ mm	OAL mm	ZEFP	50 546 ... EUR W1/5D		50 547 ... EUR W1/5D	
3,14	M4	0,70	9	6	55	3	179,40	**04000**	182,10	**04000**
3,95	M5	0,80	11	6	55	3	179,40	**05000**	182,10	**05000**
4,68	M6 - M7	1,00	16	8	60	3	183,40	**06000**	186,30	**06000**
6,22	M8 - M9	1,25	22	10	71	4	208,40	**08000**	209,70	**08000**
7,79	M10 - M12	1,50	26	10	76	4	209,70	**10000**	212,40	**10000**
9,38	M12	1,75	27	12	86	4	233,20	**12000**	234,50	**12000**

P	○	○
M	○	○
K	○	○
N	○	○
S	○	○
H	●	●
O	○	○

→ v_c/f_z Page 78

Other dimensions are available on request.

MonoThread – Shank thread milling cutter with shank-end countersink

▲ Note: left-hand cutting
▲ Profile corrected

SFSE Micro | M | 60° | ≤ 1,5xD | 46–60 HRC

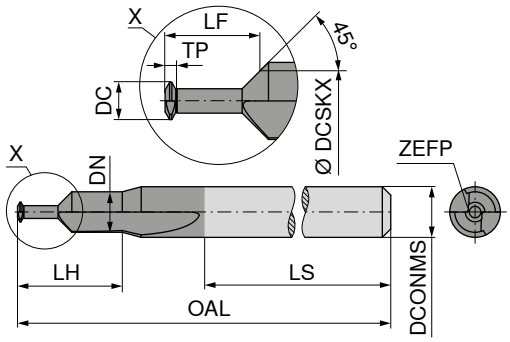

Ti602

Solid carbide

50 804 ...

DC mm	Thread	KOMET no.	TP mm	OAL mm	DN mm	LS mm	LH mm	DCONMS h6 mm	DCSKX mm	LF mm	ZEFP	EUR W1/5D	
0,75	M1	88977001000001	0,25	40	1,8	28	5,2	3	1,5	2,1	2	175,00	**01000**
1,10	M1,4	88977001000004	0,30	40	2,0	28	5,7	3	1,7	2,6	2	175,00	**01400**
1,25	M1,6	88977001000005	0,35	40	2,4	28	6,0	3	2,1	3,1	2	175,00	**01600**
1,60	M2	88977001000008	0,40	40	3,0	28		3	2,6	3,7	2	164,00	**02000**
1,75	M2,2	88977001000009	0,45	40	3,0	28		3	2,5	3,9	2	164,00	**02200**
2,05	M2,5	88977001000011	0,45	40	3,0	28		3	2,9	4,5	2	164,00	**02500**

P	○
M	○
K	
N	○
S	○
H	●
O	

→ v_c/f_z Page 80

Caution: left-hand cutting (M04) → spindle rotation left!

7

MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected



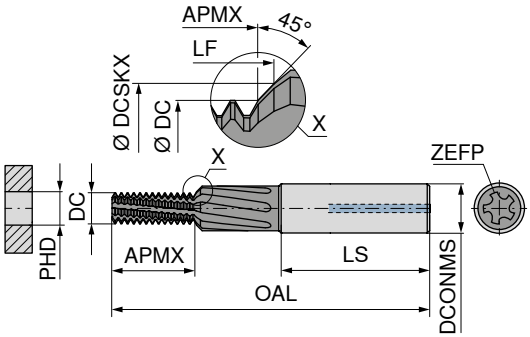

Solid carbide

HPC – High Perfomance Cutting

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	50 806 ... EUR W1/5D	
3,14	M4	88296001000015	0,70	49	8,0	36	6	4,3	8,6	5	3,3	188,10	**04000**
3,95	M5	88296001000017	0,80	55	9,9	36	6	5,3	10,6	5	4,2	188,10	**05000**
4,68	M6	88296001000018	1,00	62	12,3	36	8	6,3	13,2	6	5,0	201,70	**06000**
6,22	M8	88296001000020	1,25	74	16,6	40	10	8,3	17,8	7	6,8	235,70	**08000**
7,79	M10	88296001000022	1,50	79	19,9	45	12	10,3	21,3	7	8,5	262,90	**10000**
9,38	M12	88296001000024	1,75	89	24,9	45	14	12,3	26,6	7	10,2	328,60	**12000**
10,92	M14	88296001000025	2,00	102	28,5	48	16	14,3	30,4	7	12,0	371,60	**14000**
12,83	M16	88296001000026	2,00	102	32,4	48	18	16,3	34,4	8	14,0	419,30	**16000**

DC mm	Thread	KOMET no.	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	50 807 ... EUR W1/5D	
3,95	M5x0,5	88296002000037	0,50	55	10,2	36	6	5,3	10,8	5	4,5	217,70	**05100**
4,68	M6x0,75	88296002000048	0,75	62	12,2	36	8	6,3	13,0	5	5,2	222,20	**06200**
6,22	M8x1	88296002000070	1,00	74	16,2	40	10	8,3	17,3	6	7,0	251,60	**08300**
7,79	M10x1	88296002000094	1,00	79	20,1	45	12	10,3	21,5	7	9,0	281,00	**10300**
9,38	M12x1	88296002000111	1,00	89	24,0	45	14	12,3	25,6	7	11,0	344,50	**12300**
9,38	M12x1,5	88296002000113	1,50	89	24,3	45	14	12,3	25,9	7	10,5	344,50	**12500**
10,92	M14x1,5	88296002000131	1,50	102	28,7	48	16	14,3	30,6	7	12,5	403,60	**14500**
12,82	M16X1,5	88296002000147	1,50	102	31,7	48	18	16,3	33,6	8	14,5	473,60	**16500**

P	●
M	●
K	●
N	
S	●
H	
O	

→ v_c/f_z Page 80

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected



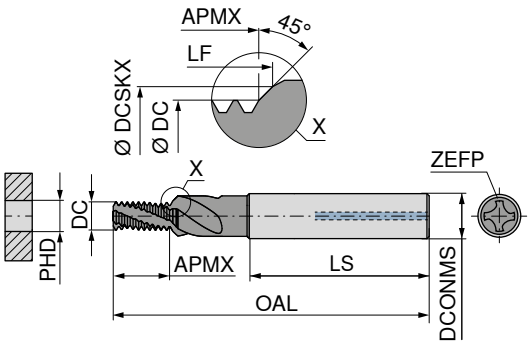

NEW

AlTiN

Solid carbide

50 552 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W1/5D	
3,95	M5	0,80	55	10,05	36	6	5,3	10,60	3	4,2	186,40	**05000**
4,68	M6	1,00	62	12,56	36	8	6,3	13,20	4	5,0	186,40	**06000**
6,22	M8	1,25	74	16,99	40	10	8,3	17,76	4	6,8	214,70	**08000**
7,79	M10	1,50	79	20,41	45	12	10,3	21,30	4	8,5	237,90	**10000**
9,38	M12	1,75	89	25,57	45	14	12,3	26,60	5	10,2	354,50	**12000**
12,83	M16	2,00	102	33,27	48	18	16,3	34,42	5	14,0	375,50	**16000**

NEW

50 553 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W1/5D	
6,22	M8x1	1,00	74	16,69	40	10	8,3	17,34	4	7,0	245,00	**08200**
7,79	M10x1	1,00	79	20,81	45	12	10,3	21,46	4	9,0	289,10	**10200**
7,79	M10x1,25	1,25	79	20,85	45	12	12,3	21,63	4	8,8	289,10	**10300**
9,38	M12x1,25	1,25	89	24,72	45	14	12,3	25,49	5	10,8	360,70	**12300**
9,38	M12x1,5	1,50	89	25,02	45	14	12,3	25,92	5	10,5	360,70	**12400**
10,92	M14x1	1,00	102	29,06	48	16	14,3	29,71	5	13,0	383,40	**14200**
10,92	M14x1,5	1,50	102	29,65	48	16	14,3	30,55	5	12,5	383,40	**14400**
12,82	M16x1,5	1,50	102	32,67	48	18	14,3	33,57	5	14,5	385,40	**16400**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected



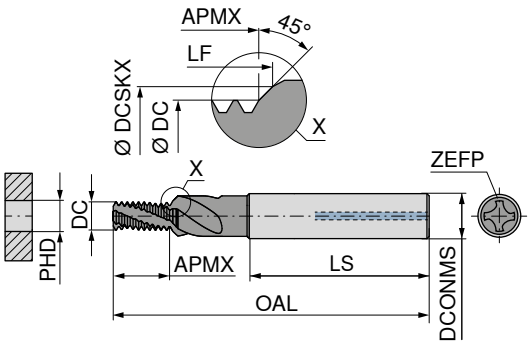

NEW

AlTiN

Solid carbide

50 551 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W1/5D	
7,79	G 1/8-28	0,907	79	20,59	45	12	10,03	21,25	4	8,80	305,20	**01800**
10,92	G 1/4-19	1,337	102	27,53	48	16	13,46	28,43	5	11,80	401,90	**01400**
13,92	G 3/8-19	1,337	102	34,34	48	18	16,96	35,24	5	15,25	429,40	**03800**
15,98	G1/2-14	1,814	127	43,27	56	25	21,25	44,45	5	19,00	507,70	**01200**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected



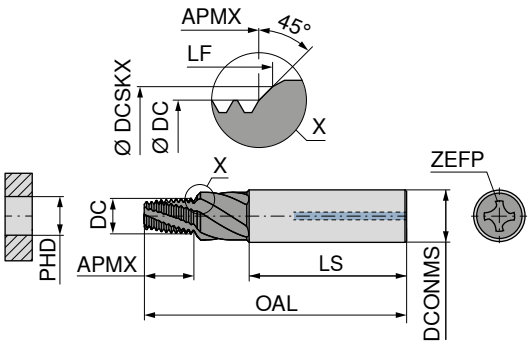

NEW

AlTiN

Solid carbide

50 554 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W1/5D	
5,45	NPT 1/16-27	0,941	64	9,86	40	10	8,70	11,33	4	6,15	246,70	**11600**
7,87	NPT 1/8-27	0,941	74	9,86	45	12	11,10	11,33	4	8,50	286,40	**01800**
10,10	NPT 1/4-18	1,411	80	14,78	48	16	14,50	16,76	5	11,10	337,60	**01400**
16,42	NPT 1/2-14	1,814	94	18,98	48	18			5	17,90	500,50	**01200**[1)]

P	●
M	●
K	●
N	●
S	●
H	
O	●

1) Chamfer section at the front of the tool

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected



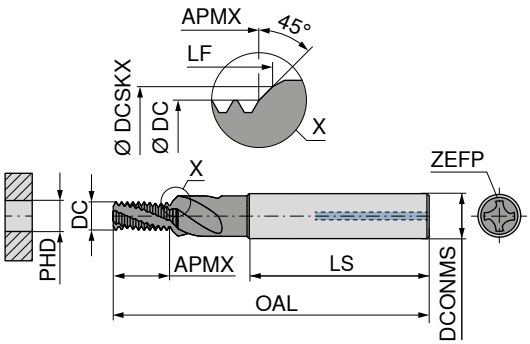

NEW

AlTiN

Solid carbide

50 555 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS h6 mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W1/5D	
4,70	UNC 1/4-20	1,270	62	14,68	36	8	6,65	15,46	4	5,1	251,70	**01400**
6,22	UNC 5/16-18	1,411	74	16,28	40	10	8,24	17,14	4	6,6	279,90	**51600**
7,34	UNC 3/8-16	1,588	79	19,98	45	12	9,83	20,92	4	8,0	316,60	**03800**
8,57	UNC 7/16-14	1,814	79	22,83	45	12	11,41	23,89	4	9,4	363,10	**71600**
9,38	UNC 1/2-13	1,954	89	26,71	45	14	13,00	27,83	5	10,8	369,40	**01200**
10,92	UNC 9/16-12	2,117	102	30,99	48	16	14,60	32,20	5	12,2	473,10	**91600**
12,50	UNC 5/8-11	2,309	102	33,72	48	18	16,18	35,03	5	13,5	516,90	**05800**
15,21	UNC 3/4-10	2,540	110	39,68	50	20	19,35	41,10	5	16,5	521,00	**03400**

NEW

50 556 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS h6 mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W1/5D	
4,70	UNF 1/4-28	0,907	62	14,24	36	8	6,65	14,84	4	5,5	251,70	**01400**
6,22	UNF 5/16-24	1,058	74	16,56	40	10	8,24	17,23	4	6,9	279,90	**51600**
7,79	UNF 3/8-24	1,058	79	19,73	45	12	9,83	20,41	4	8,5	321,60	**03800**
9,32	UNF 7/16-20	1,270	89	22,34	45	14	11,40	23,13	5	9,9	347,20	**71600**
9,38	UNF 1/2-20	1,270	89	26,57	45	14	13,00	27,36	5	11,5	355,40	**01200**
10,92	UNF 9/16-18	1,411	102	29,43	48	16	14,59	30,29	5	12,9	452,60	**91600**
12,82	UNF 5/8-18	1,411	102	33,58	48	18	16,18	34,43	5	14,5	371,50	**05800**
15,82	UNF 3/4-16	1,587	110	39,29	50	20	19,35	40,23	5	17,5	513,10	**03400**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread milling cutter with chamfer facet

▲ Profile-corrected
▲ Hard machining from Ø DC = 4 mm possible
▲ Chamfer section at end of shank



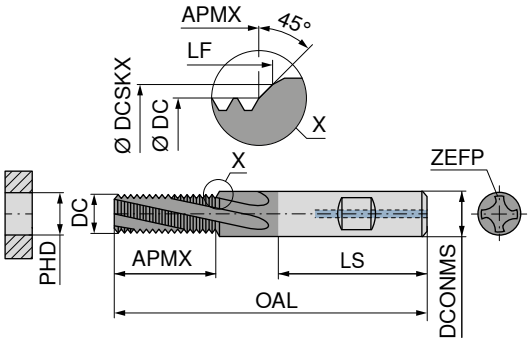

Ti500

Solid carbide

54 815 ...

DC mm	Thread	TP mm	OAL mm	LS mm	APMX mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W8/8W	
4,00	M5	0,80	62	36	12,3	8	5,3	12,98	3	4,20	172,60	**05000**[1]
4,80	M6	1,00	62	36	14,4	8	6,3	15,18	3	5,00	172,60	**06000**[1]
6,50	M8	1,25	74	40	19,0	10	8,3	20,19	3	6,80	197,00	**08000**
7,95	M10	1,50	80	45	23,0	12	10,3	24,25	3	8,50	228,80	**10000**
9,90	M12	1,75	90	45	28,6	14	12,3	29,94	4	10,25	343,50	**12000**
11,60	M14	2,00	100	48	32,6	16	14,3	34,20	4	12,00	365,10	**14000**
11,95	M16	2,00	90	45	36,6	12			4	14,00	247,80	**16000**[2]
13,95	M18	2,50	110	50	38,0	20	18,3	40,50	4	15,50	466,50	**18000**
15,95	M20	2,50	100	48	43,3	16			4	17,50	365,10	**20000**[2]

1) Without Through Coolant
2) Chamfer section at the front of the tool

54 816 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W8/8W	
6,0	M8x1	1,00	74	19,2	40	10	8,3	20,41	3	7,0	233,30	**08000**
8,0	M10x1	1,00	80	22,2	45	12	10,3	23,41	3	9,0	275,30	**10000**
8,0	M10x1,25	1,25	80	22,8	45	12	10,3	24,09	3	8,8	275,30	**10100**
9,9	M12x1	1,00	90	27,2	45	14	12,3	28,42	4	11,0	343,50	**12000**
9,9	M12x1,25	1,25	90	27,8	45	14	12,3	29,10	4	10,8	343,50	**12100**
9,9	M12x1,5	1,50	90	27,5	45	14	12,3	28,77	4	10,5	343,50	**12200**
11,6	M14x1	1,00	100	31,0	48	16	14,3	32,51	4	13,0	365,10	**14000**
11,6	M14x1,5	1,50	100	32,0	48	16	14,3	33,35	4	12,5	365,10	**14100**
12,0	M16x1,5	1,50	90	35,0	45	12			4	14,5	275,30	**16000**[1]
14,0	M18x1,5	1,50	110	39,0	50	20	18,3	41,30	4	16,5	466,50	**18000**
16,0	M20x1,5	1,50	100	44,0	48	16			4	18,5	365,10	**20000**[1]

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) Chamfer section at the front of the tool

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread milling cutter with chamfer facet

▲ Profile-corrected
▲ Hard machining from Ø DC = 4 mm possible
▲ Chamfer section at end of shank



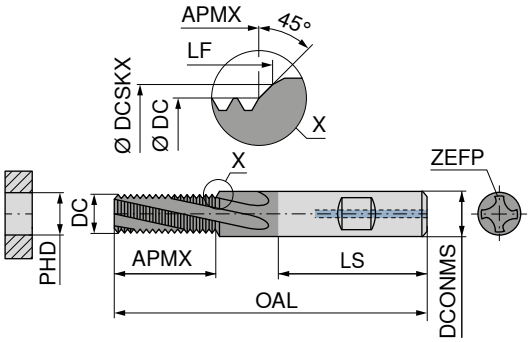

Solid carbide

54 817 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS h6 mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W8/8W	
6,00	G 1/16-28	0,907	74	16,5	40	10	8,02	17,54	3	6,80	265,30	**11600**
7,95	G 1/8-28	0,907	80	22,0	45	12	10,03	23,00	3	8,80	282,60	**01800**
9,90	G 1/4-19	1,337	100	28,0	48	16	13,46	29,98	4	11,80	423,10	**01400**
13,95	G 3/8-19	1,337	90	36,5	45	14			4	15,25	343,50	**03800**[1)]
15,95	G 1/2-14	1,814	100	46,0	48	16			5	19,00	423,10	**01200**[1)]
17,95	G 5/8-14	1,814	110	49,5	48	18			5	21,00	486,70	**05800**[1)]

1) Chamfer section at the front of the tool

54 820 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS h6 mm	ZEFP	PHD mm	EUR W8/8W	
10,1	NPT 1/4-18	1,411	90	16,0	45	14	3	11,1	301,40	**01400**[1)]
12,8	NPT 3/8-18	1,411	90	16,0	48	16	4	14,5	308,60	**03800**[1)]
16,0	NPT 1/2-14	1,814	110	20,5	50	20	5	17,9	476,70	**01200**[1)]
18,5	NPT 3/4-14	1,814	110	20,5	50	20	5	23,2	476,70	**03400**[1)]

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) Chamfer section at the front of the tool

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread milling cutter with chamfer facet

▲ Profile-corrected
▲ Hard machining from Ø DC = 4 mm possible
▲ Chamfer section at end of shank



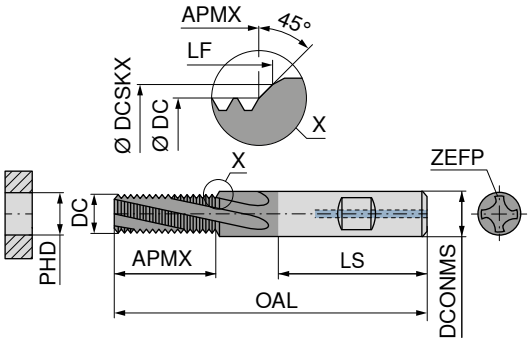

Solid carbide

54 818 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W8/8W	
4,80	UNC 1/4-20	1,270	62	14,4	36	8	6,65	15,43	3	5,1	218,80	**01400**[1]
5,95	UNC 5/16-18	1,411	74	20,2	40	10	8,24	21,44	3	6,6	243,50	**51600**
7,60	UNC 3/8-16	1,588	80	24,3	45	12	9,83	25,62	3	8,0	275,30	**03800**
7,95	UNC 7/16-14	1,814	90	24,0	45	14	11,41	25,86	3	9,4	315,70	**71600**
9,90	UNC 1/2-13	1,954	90	29,8	45	14	13,00	31,59	4	10,8	315,70	**01200**
11,80	UNC 9/16-12	2,117	100	34,5	48	16	14,59	36,19	4	12,2	411,40	**91600**
12,70	UNC 5/8-11	2,309	90	37,7	45	14			4	13,5	323,10	**05800**[2]
15,20	UNC 3/4-10	2,540	110	41,2	50	20	19,35	43,63	5	16,5	466,50	**03400**

1) Without Through Coolant
2) Chamfer section at the front of the tool

54 819 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	DCSKX mm	LF mm	ZEFP	PHD mm	EUR W8/8W	
4,80	UNF 1/4-28	0,907	62	14,7	36	8	6,65	15,72	3	5,5	218,80	**01400**[1]
5,95	UNF 5/16-24	1,058	74	19,3	40	10	8,24	20,48	3	6,9	243,50	**51600**
8,00	UNF 3/8-24	1,058	80	22,5	45	12	9,83	23,54	3	8,5	275,30	**03800**
7,95	UNF 7/16-20	1,270	90	23,0	45	14	11,41	24,76	3	9,9	315,70	**71600**
9,90	UNF 1/2-20	1,270	90	28,0	45	14	13,00	29,75	4	11,5	323,10	**01200**
12,00	UNF 9/16-18	1,411	100	31,4	48	16	15,59	32,81	4	12,9	411,40	**91600**
13,50	UNF 5/8-18	1,411	90	35,7	45	14			4	14,5	323,10	**05800**[2]
17,00	UNF 3/4-16	1,588	110	40,2	50	20	19,35	41,53	5	17,5	466,50	**03400**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) Without Through Coolant
2) Chamfer section at the front of the tool

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Circular shank thread milling cutter

▲ Available on request from M1
▲ Profile corrected



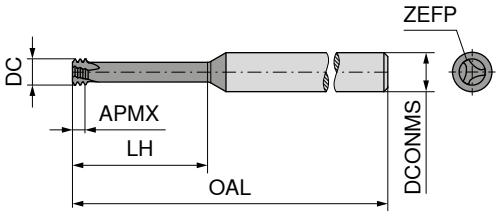



50 802 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS $_{h6}$ mm	ZEFP	EUR W1	
1,53	M2	0,40	39	0,80	6,0	3	3	91,09	**02000**
2,37	M3	0,50	58	1,35	9,5	6	3	91,09	**03000**
3,10	M4	0,70	58	1,95	12,5	6	3	91,09	**04000**
3,80	M5	0,80	58	2,30	16,0	6	3	91,09	**05000**
4,65	M6	1,00	58	2,70	20,0	6	3	91,09	**06000**
6,00	M8	1,25	58	3,20	24,0	6	3	91,09	**08000**
7,80	M10	1,50	64	3,80	31,5	8	3	113,50	**10000**
9,00	M12	1,75	73	4,55	37,8	10	3	127,60	**12000**

50 803 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS $_{h6}$ mm	ZEFP	EUR W1	
1,53	M2	0,40	39	1,00	10,4	3	3	102,50	**02000**
2,40	M3	0,50	39	1,30	12,5	3	3	97,97	**03000**
3,10	M4	0,70	58	1,80	16,7	6	3	97,97	**04000**
4,00	M5	0,80	58	2,10	20,8	6	3	97,97	**05000**
4,80	M6	1,00	58	2,55	25,0	6	3	97,97	**06000**
6,40	M8	1,25	64	3,15	33,5	8	3	121,40	**08000**
8,00	M10	1,50	76	3,85	41,5	8	3	121,40	**10000**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 80

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread Milling Cutter

▲ Profile corrected



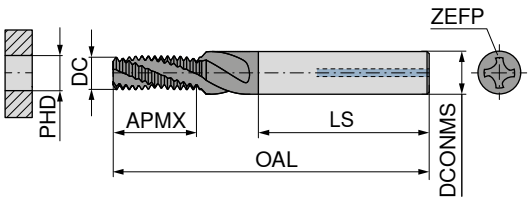

NEW

AlTiN

Solid carbide

50 531 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	ZEFP	PHD mm	EUR W1/5D	
2,44	M3	0,50	42	6,24	36	4	3	2,5	155,90	**03000**[1]
3,14	M4	0,70	49	8,00	36	6	3	3,3	173,40	**04000**
3,95	M5	0,80	55	10,00	36	6	3	4,2	173,40	**05000**
4,68	M6	1,00	55	12,47	36	6	4	5,0	178,50	**06000**
6,22	M8	1,25	62	16,83	36	8	4	6,8	188,00	**08000**
7,79	M10	1,50	74	20,20	40	10	4	8,5	215,00	**10000**
9,38	M12	1,75	79	25,32	45	12	5	10,2	247,20	**12000**
10,92	M14	2,00	89	28,93	45	14	5	12,0	302,80	**14000**
12,83	M16	2,00	102	32,94	48	16	5	14,0	310,90	**16000**
13,93	M18	2,50	102	36,17	48	16	5	15,5	371,20	**18000**
15,83	M20	2,50	110	41,17	50	20	5	17,5	379,20	**20000**

1) Without Through Coolant

NEW

50 532 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	ZEFP	PHD mm	EUR W1/5D	
3,14	M4x0,5	0,50	49	8,00	36	6	3	3,5	170,50	**04000**
3,95	M5x0,5	0,50	55	10,00	36	6	3	4,5	170,50	**05000**
4,68	M6x0,75	0,75	55	12,34	36	6	4	5,2	175,60	**06100**
6,22	M8x0,75	0,75	62	16,09	36	8	4	7,2	188,00	**08100**
6,22	M8x1	1,00	62	16,46	36	8	4	7,0	191,00	**08200**
7,79	M10x1	1,00	74	20,46	40	10	4	9,0	204,80	**10200**
9,38	M12x1	1,00	79	24,45	45	12	5	11,0	247,20	**12200**
9,38	M12x1,5	1,50	79	24,69	45	12	5	10,5	258,40	**12400**
10,92	M14x1,5	1,50	89	29,19	45	14	5	12,5	302,80	**14400**
12,82	M16x1,5	1,50	102	32,19	48	16	5	14,5	310,90	**16400**
13,93	M18x1,5	1,50	102	36,68	48	16	5	16,5	371,20	**18400**
15,83	M20x1,5	1,50	110	41,18	50	20	5	18,5	379,20	**20400**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

MonoThread – Thread Milling Cutter

▲ Profile corrected



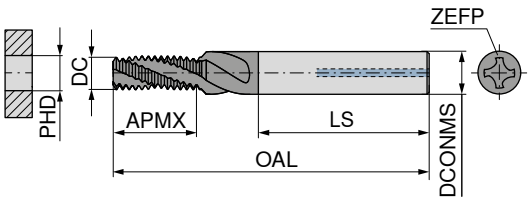

NEW

AlTiN

Solid carbide

50 530 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS $_{h6}$ mm	ZEFP	PHD mm	EUR W1/5D	
7,79	G 1/8-28	0,907	74	20,35	40	10	4	8,80	239,80	**01800**
10,92	G 1/4-19	1,337	89	27,34	45	14	5	11,80	268,30	**01400**
13,92	G 3/8-19	1,337	102	35,36	48	16	5	15,25	374,80	**03800**
15,90	G 1-11	2,309	102	33,29	48	16	5	30,75	446,20	**10000**
15,98	G 1/2-14	1,814	110	42,51	50	20	5	19,00	400,00	**01200**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread milling cutter

▲ Profile corrected
▲ Hard machining from Ø DC = 4 mm possible



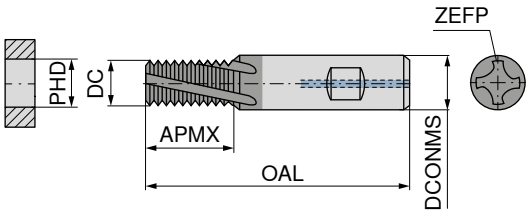

Solid carbide

54 821 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
2,40	M3	0,50	7,0	4	42	2	2,50	124,70	**03000**[1]
3,15	M4	0,70	10,0	6	55	3	3,30	142,10	**04000**[2]
4,00	M5	0,80	12,2	6	55	3	4,20	142,10	**05000**[2]
4,80	M6	1,00	14,3	6	55	3	5,00	146,30	**06000**[2]
6,00	M8	1,25	19,0	6	60	3	6,75	156,60	**08000**
8,00	M10	1,50	23,0	8	70	3	8,50	195,50	**10000**
9,90	M12	1,75	28,6	10	75	4	10,25	224,70	**12000**
11,60	M14	2,00	32,6	12	85	4	12,00	275,30	**14000**
12,00	M16	2,00	36,6	12	85	4	14,00	282,60	**16000**
14,00	M18	2,50	43,3	14	90	4	15,50	337,50	**18000**
16,00	M20	2,50	43,3	16	90	4	17,50	344,70	**20000**

1) DIN 6535 HA Shank / Without Through Coolant
2) Without Through Coolant

54 822 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
4,0	M 5x0,5	0,50	11,6	6	55	3	4,50	142,10	**05000**[1]
4,8	M 6x0,75	0,75	14,5	6	55	3	5,25	146,30	**06000**[1]
6,0	M 8x1	1,00	19,3	6	60	3	7,00	156,60	**08000**
8,0	M 10x1,25	1,25	21,6	8	70	3	8,75	195,50	**10000**
9,9	M 12x1	1,00	27,3	10	75	4	11,00	224,70	**12000**
9,9	M 12x1,25	1,25	27,9	10	75	4	10,75	224,70	**12100**
9,9	M 12x1,5	1,50	27,5	10	75	4	10,50	224,70	**12200**
11,6	M 14x1	1,00	31,3	12	85	4	13,00	275,30	**14000**
11,6	M 14x1,5	1,50	32,0	12	85	4	12,50	275,30	**14100**
12,0	M 16x1,5	1,50	35,0	12	85	4	14,50	282,60	**16000**
14,0	M 18x1,5	1,50	42,5	14	90	4	16,50	337,50	**18000**
16,0	M 20x1,5	1,50	42,5	16	90	4	18,50	344,70	**20000**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) DIN 6535 HA Shank / Without Through Coolant

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

MonoThread – Thread milling cutter

▲ Profile corrected
▲ Hard machining from Ø DC = 4 mm possible

SGF | G | 55° | ≤ 2xD | R/L

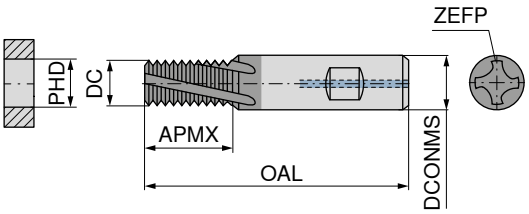

Ti500

Solid carbide

54 823 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
8,0	G 1/8-28	0,907	22,0	8	70	3	8,80	208,50	**01800**
9,9	G 1/4-19	1,337	28,5	10	75	4	11,80	233,30	**01400**
14,0	G 3/8-19	1,337	42,0	14	90	4	15,25	340,60	**03800**
16,0	G 1/2-14	1,814	44,0	16	90	4	19,00	347,70	**01200**

≤ 2xD | BSW | 55°

54 824 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
6,0	BSW 5/16 - 18	1,411	20,0	6	60	3	6,50	179,80	**51600**
6,0	BSW 3/8 - 16	1,588	21,0	6	60	3	7,90	179,80	**03800**
8,0	BSW 7/16 - 14	1,814	24,0	8	70	3	9,25	223,10	**71600**
8,0	BSW 1/2 - 12	2,117	24,0	8	70	3	10,50	223,10	**01200**
9,9	BSW 5/8 - 11	2,309	30,5	10	75	4	13,50	256,50	**05800**

≤ 2xD | BSF | 55°

54 825 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
6,0	BSF 5/16 - 22	1,155	20,0	6	60	3	6,8	179,80	**51600**
6,0	BSF 3/8 - 20	1,270	19,4	6	60	3	8,3	179,80	**03800**
8,0	BSF 7/16 - 18	1,411	23,0	8	70	3	9,7	223,10	**71600**
8,0	BSF 1/2 - 16	1,588	24,2	8	70	3	11,1	223,10	**01200**
9,9	BSF 5/8 - 14	1,814	29,5	10	75	4	14,0	256,50	**05800**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

MonoThread – Thread milling cutter

▲ Profile corrected



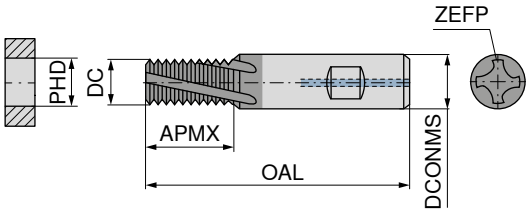

Solid carbide

54 826 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
4,80	UNC 1/4-20	1,270	14,4	6	55	3	5,1	179,80	**01400**[1)]
6,00	UNC 5/16-18	1,411	20,2	6	60	3	6,6	179,80	**51600**
7,60	UNC 3/8-16	1,588	24,3	8	70	3	8,0	223,10	**03800**
7,95	UNC 7/16-14	1,814	24,0	8	70	3	9,4	223,10	**71600**
9,90	UNC 1/2-13	1,954	29,0	10	75	4	10,8	256,50	**01200**

1) DIN 6535 HA Shank / Without Through Coolant

54 827 ...

DC mm	Thread	TP mm	APMX mm	DCONMS h6 mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
4,8	UNF 1/4-28	0,907	14,8	6	55	3	5,5	179,80	**01400**[1)]
6,0	UNF 5/16-24	1,058	19,3	6	60	3	6,9	179,80	**51600**
8,0	UNF 3/8-24	1,058	22,5	8	70	3	8,5	223,10	**03800**
8,0	UNF 7/16-20	1,270	23,2	8	70	3	9,9	223,10	**71600**
9,9	UNF 1/2-20	1,270	28,3	10	75	4	11,5	256,50	**01200**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

1) Without Through Coolant

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

7

MonoThread – Thread milling cutter

▲ Intra-dimensional, pitch-dependent



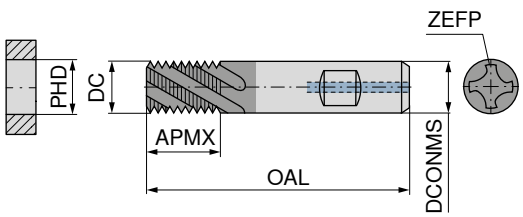

Solid carbide

54 828 ...

DC mm	TP mm	APMX mm	DCONMS $_{h6}$ mm	OAL mm	ZEFP	PHD mm	EUR W8/8W	
8	0,50	12,0	8	70	3	10	175,30	**00800**
8	0,75	12,0	8	70	3	11	175,30	**08000**
10	1,00	16,0	10	75	4	14	182,40	**10000**
10	1,50	16,5	10	75	4	14	182,40	**10100**
12	1,00	20,0	12	85	4	16	211,70	**12000**
12	1,50	21,0	12	85	4	16	211,70	**12100**
12	2,00	20,0	12	85	4	18	211,70	**12200**
16	1,00	25,0	16	90	5	22	294,20	**16000**
16	1,50	25,5	16	90	5	22	294,20	**16100**
16	2,00	26,0	16	90	5	22	294,20	**16200**
16	3,00	27,0	16	90	5	24	294,20	**16400**

P	●
M	●
K	●
N	●
S	●
H	●
O	●

→ v_c/f_z Page 79

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 84+85.**

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

7

Cutting data standard values

Index	50 854 ..., 50 862 ..., 50 869 ..., 50 898 ...						50 840 ...				50 546 ..., 50 547 ...		
	BGF		Feed rate Drilling		Feed rate Thread milling		ZBGF	TiCN Solid carbide			HR	TiCN Solid carbide	
	Ti601	uncoated	≤ Ø 6	≤ Ø 12	≤ Ø 6	≤ Ø 12		Ø 3–5	Ø 6–10	Ø 12–16		< Ø 10	> Ø 10
	v_c (m/min)		f (mm/rev)		f_z (mm/tooth)		v_c (m/min)	f_z (mm/tooth)			v_c (m/min)	f_z (mm/tooth)	
P.1.1											100	0,025	0,05
P.1.2											100	0,025	0,05
P.1.3											100	0,025	0,05
P.1.4											80	0,015	0,035
P.1.5											80	0,015	0,035
P.2.1											100	0,025	0,05
P.2.2											80	0,015	0,035
P.2.3											80	0,015	0,035
P.2.4											80	0,015	0,035
P.3.1											100	0,025	0,05
P.3.2											80	0,015	0,035
P.3.3											80	0,02	0,04
P.4.1											80	0,02	0,04
P.4.2											80	0,02	0,04
M.1.1											80	0,02	0,04
M.2.1											80	0,02	0,04
M.3.1											80	0,02	0,04
K.1.1	**80–120**	50–80	0,10–0,15	0,15–0,22	0,02–0,05	0,05–0,10					120	0,03	0,09
K.1.2	**80–120**	50–80	0,10–0,15	0,15–0,22	0,02–0,05	0,05–0,10					120	0,03	0,09
K.2.1											100	0,02	0,05
K.2.2											100	0,02	0,05
K.3.1											100	0,02	0,05
K.3.2											100	0,02	0,05
N.1.1	100–400	**100–400**	0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					350	0,05	0,1
N.1.2	100–400	**100–400**	0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					350	0,05	0,1
N.2.1	100–300		0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					350	0,05	0,1
N.2.2	100–400	**100–400**	0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					250	0,05	0,1
N.2.3	100–160		0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					250	0,05	0,1
N.3.1	100–300	**100–300**	0,10–0,30	0,25–0,30	0,03–0,06	0,06–0,10					350	0,05	0,1
N.3.2											350	0,05	0,1
N.3.3											350	0,05	0,1
N.4.1	100–400	**100–400**	0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					350	0,05	0,1
S.1.1											40	0,02	0,05
S.1.2							80	0,01	0,03	0,03	20	0,02	0,05
S.2.1							60	0,01	0,02	0,02	20	0,02	0,05
S.2.2							60	0,01	0,02	0,02			
S.2.3							60	0,01	0,02	0,02			
S.3.1											100	0,02	0,05
S.3.2							80	0,01	0,03	0,03	80	0,02	0,05
S.3.3							60	0,01	0,02	0,02	80	0,02	0,05
H.1.1							**80**	0,01	0,03	0,03	**40**	0,008	0,017
H.1.2							**60**	0,01	0,02	0,02	**25**	0,005	0,012
H.1.3							**40**	0,005	0,01	0,01			
H.1.4													
H.2.1							**100**	0,03	0,04	0,04	**60**	0,02	0,04
H.3.1							**60**	0,01	0,02	0,02	**25**	0,005	0,012
O.1.1	60–100	**60–100**	0,10–0,25	0,25–0,30	0,03–0,06	0,06–0,10					120	0,04	0,1
O.1.2											120	0,04	0,1
O.2.1											80	0,04	0,1
O.2.2											80	0,04	0,1
O.3.1							180	0,04	0,05	0,08	130	0,04	0,1

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	54 815 ..., 54 816 ..., 54 817 ..., 54 818 ..., 54 819 ..., 54 820 ... / 54 821 ..., 54 822 ..., 54 823 ..., 54 824 ..., 54 825 ..., 54 826 ..., 54 827 ..., 54 828 ...				50 552 ..., 50 553 ..., 50 551 ..., 50 554 ... , 50 555 ... , 50 556 ... / 50 531 ..., 50 532 ..., 50 530 ...			
	SFSE	SGF	Ti500 – Standard Solid carbide			SFSE	SGF	AlTiN –Performance Solid carbide		
			Ø 2,4 – 6,0	Ø 6,0 – 10,0	Ø 10,0 – 20,0			Ø 2,4 – 5,9	Ø 6,0 – 11,9	Ø 12,0 – 20,0
	v_c (m/min)		f_z (mm/tooth)			v_c (m/min)		f_z (mm/tooth)		
P.1.1	150		0,01–0,04	0,04–0,06	0,08–0,15	80–150		0,015–0,04	0,04–0,08	0,08–0,15
P.1.2	120		0,01–0,04	0,04–0,06	0,08–0,15	80–120		0,015–0,04	0,04–0,08	0,08–0,15
P.1.3	120		0,007–0,03	0,03–0,05	0,05–0,10	80–120		0,015–0,04	0,04–0,08	0,08–0,15
P.1.4	120		0,007–0,03	0,03–0,05	0,05–0,10	80–120		0,015–0,04	0,04–0,08	0,08–0,15
P.1.5	100		0,006–0,02	0,02–0,04	0,04–0,06	60–100		0,01–0,04	0,04–0,06	0,04–0,10
P.2.1	120		0,007–0,04	0,04–0,06	0,08–0,15	80–120		0,015–0,04	0,04–0,08	0,08–0,15
P.2.2	100		0,007–0,03	0,03–0,05	0,05–0,10	80–100		0,015–0,04	0,04–0,08	0,08–0,15
P.2.3	80		0,006–0,02	0,02–0,04	0,04–0,06	80–100		0,010–0,04	0,04–0,08	0,08–0,15
P.2.4	70		0,006–0,02	0,02–0,04	0,04–0,06	80–100		0,010–0,04	0,04–0,08	0,08–0,15
P.3.1	80		0,01–0,03	0,03–0,05	0,06–0,12	70–90		0,01–0,03	0,03–0,05	0,06–0,12
P.3.2	70		0,006–0,02	0,02–0,04	0,04–0,06	60–80		0,006–0,02	0,02–0,04	0,04–0,06
P.3.3	60		0,006–0,02	0,02–0,04	0,04–0,06	50–70		0,006–0,02	0,02–0,04	0,04–0,06
P.4.1	60		0,006–0,02	0,02–0,04	0,04–0,06	70–90		0,006–0,02	0,02–0,04	0,04–0,06
P.4.2	60		0,006–0,02	0,02–0,04	0,04–0,06	60–80		0,006–0,02	0,02–0,04	0,04–0,06
M.1.1	100		0,008–0,03	0,03–0,05	0,05–0,10	60–100		0,01–0,04	0,04–0,08	0,08–0,10
M.2.1	100		0,008–0,03	0,03–0,05	0,05–0,10	60–100		0,01–0,03	0,03–0,06	0,06–0,10
M.3.1	100		0,008–0,03	0,03–0,05	0,05–0,10	60–100		0,01–0,03	0,03–0,06	0,06–0,10
K.1.1	120		0,01–0,04	0,04–0,06	0,08–0,15	80–120		0,02–0,06	0,06–0,12	0,10–0,15
K.1.2	100		0,007–0,03	0,03–0,05	0,05–0,10	80–120		0,02–0,05	0,05–0,10	0,10–0,12
K.2.1	120		0,01–0,04	0,04–0,06	0,08–0,15	80–100		0,02–0,05	0,05–0,10	0,08–0,15
K.2.2	100		0,007–0,03	0,03–0,05	0,05–0,10	80–100		0,02–0,05	0,05–0,10	0,08–0,12
K.3.1	130		0,01–0,04	0,04–0,06	0,08–0,15	80–100		0,015–0,05	0,05–0,08	0,08–0,12
K.3.2	100		0,007–0,03	0,03–0,05	0,05–0,10	80–100		0,015–0,03	0,03–0,08	0,08–0,12
N.1.1	400		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.1.2	400		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.2.1	300		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.2.2	300		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.2.3	200		0,03–0,06	0,08–0,12	0,14–0,20	100–250		0,04–0,09	0,08–0,15	0,12–0,20
N.3.1	160		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.3.2	160		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.3.3	160		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
N.4.1	300		0,03–0,06	0,08–0,12	0,14–0,20	100–400		0,04–0,09	0,08–0,15	0,12–0,20
S.1.1	80		0,008–0,03	0,03–0,05	0,05–0,10	40–100		0,01–0,04	0,04–0,07	0,07–0,12
S.1.2	60		0,006–0,02	0,02–0,04	0,04–0,06					
S.2.1	40		0,006–0,02	0,02–0,04	0,04–0,06					
S.2.2	40		0,006–0,02	0,02–0,04	0,04–0,06					
S.2.3	40		0,006–0,02	0,02–0,04	0,04–0,06					
S.3.1	100		0,01–0,03	0,03–0,05	0,06–0,12	40–100		0,01–0,04	0,04–0,07	0,07–0,15
S.3.2	80		0,006–0,02	0,02–0,04	0,04–0,06					
S.3.3	60		0,006–0,02	0,02–0,04	0,04–0,06					
H.1.1	50		0,003–0,006	0,008–0,012	0,014–0,02					
H.1.2	40			0,006–0,01	0,01–0,015					
H.1.3										
H.1.4										
H.2.1	60			0,006–0,01	0,01–0,015					
H.3.1	40			0,006–0,01	0,01–0,015					
O.1.1	100		0,02–0,06	0,06–0,10	0,12–0,20	100–400		0,03–0,08	0,08–0,15	0,15–0,20
O.1.2	100		0,02–0,06	0,06–0,10	0,12–0,20	100–400		0,03–0,08	0,08–0,15	0,15–0,20
O.2.1	80		0,01–0,04	0,04–0,06	0,08–0,15	50–80		0,03–0,08	0,08–0,15	0,15–0,20
O.2.2	80		0,01–0,04	0,04–0,06	0,08–0,15	50–80		0,03–0,08	0,08–0,15	0,15–0,20
O.3.1	200		0,01–0,04	0,04–0,06	0,08–0,15					

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

7

Cutting data standard values

Index	50 802 ..., 50 803 ...					50 806 ..., 50 807 ...				50 804 ...	
	SGF	Ti600 – Circular shank thread milling cutter Solid carbide				SFSE	AlCrN – Performance HPC Solid carbide			SFSE Micro	Ti602 Solid carbide
		Ø 1–2	Ø 3–5	Ø 6–8	Ø 9–12		Ø 3–5	Ø 6–10	Ø 10–13		Ø 0,7–2,1
	v_c (m/min)	f_z (mm/tooth)				v_c (m/min)	f_z (mm/tooth)			v_c (m/min)	f_z (mm/tooth)
P.1.1	110	0,05	0,09	0,14	0,16	100–140	0,015–0,03	0,04–0,06	0,06–0,10	20–40	0,01–0,02
P.1.2	110	0,05	0,09	0,14	0,16	100–120	0,015–0,03	0,04–0,06	0,06–0,10	20–40	0,01–0,02
P.1.3	110	0,05	0,09	0,14	0,16	80–100	0,015–0,02	0,03–0,05	0,03–0,07	20–40	0,01–0,02
P.1.4	110	0,05	0,09	0,14	0,16	80–100	0,015–0,02	0,02–0,04	0,03–0,05	20–40	0,01–0,02
P.1.5	110	0,05	0,09	0,14	0,16	80–100	0,015–0,02	0,02–0,03	0,03–0,04	20–40	0,01–0,02
P.2.1	80	0,04	0,08	0,12	0,14	100–120	0,015–0,03	0,04–0,06	0,06–0,10	20–40	0,01–0,02
P.2.2	80	0,04	0,08	0,12	0,14	80–100	0,015–0,03	0,02–0,05	0,03–0,07	20–40	0,01–0,02
P.2.3	80	0,04	0,08	0,12	0,14	80–100	0,015–0,02	0,02–0,03	0,03–0,04	20–40	0,01–0,02
P.2.4	80	0,04	0,08	0,12	0,14	80–100	0,015–0,02	0,02–0,03	0,03–0,04	20–40	0,01–0,02
P.3.1	60	0,04	0,08	0,12	0,14	100–120	0,015–0,03	0,04–0,06	0,06–0,10	20–40	0,01–0,02
P.3.2	60	0,04	0,08	0,12	0,14	80–100	0,015–0,02	0,02–0,03	0,03–0,04	20–40	0,01–0,02
P.3.3	60	0,04	0,08	0,12	0,14	80–100	0,015–0,02	0,02–0,03	0,03–0,04	20–40	0,01–0,02
P.4.1	60	0,04	0,08	0,12	0,14	60–80	0,015–0,03	0,04–0,06	0,06–0,10	20–40	0,01–0,02
P.4.2	80	0,04	0,08	0,12	0,14	60–80	0,015–0,03	0,04–0,06	0,06–0,10	20–40	0,01–0,02
M.1.1	80	0,04	0,05	0,07	0,10	60–80	0,015–0,03	0,04–0,06	0,06–0,10	20–30	0,01–0,02
M.2.1	80	0,04	0,05	0,07	0,10	60–80	0,015–0,03	0,04–0,06	0,06–0,10	20–30	0,01–0,02
M.3.1	80	0,04	0,05	0,07	0,10	60–80	0,015–0,03	0,04–0,06	0,06–0,10	20–30	0,01–0,02
K.1.1	50	0,05	0,09	0,14	0,16	100–120	0,02–0,04	0,04–0,08	0,06–0,10		
K.1.2	50	0,05	0,09	0,14	0,16	100–120	0,02–0,04	0,04–0,08	0,06–0,10		
K.2.1	50	0,05	0,09	0,14	0,16	100–120	0,02–0,04	0,04–0,08	0,06–0,10		
K.2.2	50	0,05	0,09	0,14	0,16	80–100	0,02–0,04	0,04–0,08	0,06–0,10		
K.3.1	50	0,05	0,09	0,14	0,16	80–100	0,02–0,04	0,04–0,08	0,06–0,08		
K.3.2	50	0,05	0,09	0,14	0,16	80–100	0,02–0,04	0,04–0,08	0,06–0,08		
N.1.1	130	0,05	0,09	0,14	0,16					30–50	0,02–0,03
N.1.2	130	0,05	0,09	0,14	0,16					30–50	0,02–0,03
N.2.1	120	0,04	0,05	0,07	0,10					30–50	0,02–0,03
N.2.2	100	0,04	0,05	0,07	0,10					30–50	0,02–0,03
N.2.3	100	0,04	0,05	0,07	0,10					30–50	0,02–0,03
N.3.1	130	0,05	0,09	0,14	0,16					30–50	0,02–0,03
N.3.2	130	0,05	0,09	0,14	0,16					30–50	0,02–0,03
N.3.3	130	0,05	0,09	0,14	0,16					30–50	0,02–0,03
N.4.1	110	0,04	0,05	0,07	0,10					30–50	0,02–0,03
S.1.1	30	0,03	0,04	0,06	0,07					20–30	0,01–0,02
S.1.2	30	0,03	0,04	0,06	0,07					20–30	0,01–0,02
S.2.1	30	0,03	0,04	0,06	0,07					20–30	0,01–0,02
S.2.2	30	0,03	0,04	0,06	0,07					20–30	0,01–0,015
S.2.3	30	0,03	0,04	0,06	0,07					20–30	0,01–0,015
S.3.1	30	0,03	0,04	0,06	0,07	60–80	0,015–0,02	0,02–0,03	0,03–0,04	20–30	0,01–0,02
S.3.2	30	0,03	0,04	0,06	0,07	60–80	0,01–0,015	0,015–0,02	0,025–0,035	20–30	0,01–0,015
S.3.3	30	0,03	0,04	0,06	0,07					20–30	0,01–0,015
H.1.1										**20–30**	0,01–0,015
H.1.2										**20–30**	0,01–0,015
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1	150	0,06	0,12	0,19	0,19						
O.1.2	150	0,06	0,12	0,19	0,19						
O.2.1	150	0,06	0,12	0,19	0,19						
O.2.2	150	0,06	0,12	0,19	0,19						
O.3.1	100	0,05	0,09	0,14	0,14						

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	50 890 ..., 50 891 ..., 50 892 ..., 50 896 ..., 50 897 ...		50 890 ..., 50 891 ..., 50 895 ...		50 863 ..., 50 864 ... / 50 885 ..., 50 887 ..., 50 888 ..., 50 889 ..., 50 894 ...			50 860 ..., 50 861 ..., 50 867 ..., 50 868 ... / 50 870 ...		
	MWN	uncoated Solid carbide	MWN	TiAlN Solid carbide	GZD	GZG	Ti500 Solid carbide Ø 12–17 / Ø 20–26		EAW	EWM
	v_c (m/min)	f_z (mm/tooth)	v_c (m/min)	f_z (mm/tooth)	v_c (m/min)		f_z (mm/tooth)	v_c (m/min)	f_z (mm/tooth)	
P.1.1	85	0,10	170	0,10	220		0,10–0,30 / 0,05–0,30	280	0,20	0,20
P.1.2	75	0,10	150	0,10	220		0,10–0,30 / 0,05–0,30	240	0,20	0,20
P.1.3	65	0,10	130	0,10	190		0,10–0,30 / 0,05–0,30	200	0,20	0,20
P.1.4	65	0,07	130	0,07	160		0,10–0,30 / 0,05–0,30	200	0,15	0,15
P.1.5	60	0,07	120	0,07	160		0,10–0,30 / 0,05–0,30	180	0,15	0,15
P.2.1	70	0,10	140	0,10	150		0,10–0,30 / 0,05–0,30	220	0,20	0,20
P.2.2	65	0,07	130	0,07	120		0,10–0,30 / 0,05–0,30	200	0,15	0,15
P.2.3	60	0,07	120	0,07	100		0,10–0,30 / 0,05–0,30	180	0,15	0,15
P.2.4	45	0,06	90	0,06	90		0,10–0,30 / 0,05–0,30	150	0,12	0,12
P.3.1	45	0,10	90	0,10	100		0,10–0,20 / 0,05–0,20	150	0,20	0,20
P.3.2	40	0,07	80	0,07	90		0,10–0,20 / 0,05–0,20	130	0,10	0,10
P.3.3	35	0,06	70	0,06	80		0,10–0,20 / 0,05–0,20	110	0,10	0,10
P.4.1	45	0,10	90	0,10	70		0,10–0,20 / 0,05–0,20	150	0,20	0,20
P.4.2	40	0,10	80	0,10	60		0,10–0,20 / 0,05–0,20	130	0,20	0,20
M.1.1	40	0,06	80	0,06	130		0,10–0,30 / 0,05–0,30	130	0,10	0,10
M.2.1	30	0,05	60	0,05	120		0,10–0,30 / 0,05–0,30	90	0,08	0,08
M.3.1	30	0,05	60	0,05	120		0,10–0,30 / 0,05–0,30	90	0,08	0,08
K.1.1	85	0,12	170	0,12	140		0,10–0,30 / 0,05–0,30	280	0,25	0,25
K.1.2	75	0,12	150	0,12	100		0,10–0,30 / 0,05–0,30	240	0,25	0,25
K.2.1	75	0,07	150	0,07	140		0,10–0,30 / 0,05–0,30	240	0,15	0,15
K.2.2	65	0,07	130	0,07	120		0,10–0,30 / 0,05–0,30	200	0,15	0,15
K.3.1	70	0,10	140	0,10	140		0,10–0,30 / 0,05–0,30	220	0,20	0,20
K.3.2	60	0,10	120	0,10	100		0,10–0,30 / 0,05–0,30	190	0,20	0,20
N.1.1	120	0,15	240	0,15	700		0,10–0,40 / 0,05–0,40	390	0,30	0,30
N.1.2	105	0,12	210	0,12	400		0,10–0,40 / 0,05–0,40	330	0,25	0,25
N.2.1	75	0,12	150	0,12	400		0,10–0,40 / 0,05–0,40	240	0,25	0,25
N.2.2	75	0,12	150	0,12	300		0,10–0,40 / 0,05–0,40	240	0,25	0,25
N.2.3	70	0,12	140	0,12	200		0,10–0,40 / 0,05–0,40	220	0,25	0,25
N.3.1	105	0,15	210	0,15	160		0,10–0,40 / 0,05–0,40	330	0,30	0,30
N.3.2	105	0,15	210	0,15	160		0,10–0,40 / 0,05–0,40	330	0,30	0,30
N.3.3	75	0,15	150	0,15	160		0,10–0,40 / 0,05–0,40	240	0,30	0,30
N.4.1	85	0,15	170	0,15	160		0,10–0,40 / 0,05–0,40	280	0,30	0,30
S.1.1								110	0,10	0,10
S.1.2								90	0,07	0,07
S.2.1								70	0,05	0,05
S.2.2								70	0,05	0,05
S.2.3								70	0,05	0,05
S.3.1								130	0,10	0,10
S.3.2								90	0,07	0,07
S.3.3								70	0,05	0,05
H.1.1								80	0,05	0,05
H.1.2								60	0,04	0,04
H.1.3										
H.1.4										
H.2.1								80	0,05	0,05
H.3.1								60	0,04	0,04
O.1.1	140	0,16								
O.1.2	140	0,16								
O.2.1	75	0,07								
O.2.2	75	0,07								
O.3.1			130	0,07				200	0,14	0,14

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	50 872 …, 50 875 …, 50 876 …, 50 879 …, 50 880 …, 50 881 …, 50 882 …, 50 883 …, 50 884 …, 50 886 …		51 800 …	50 851 …, 50 852 …, 50 853 …, 50 855 …, 50 857 …, 50 858 …, 50 859 …	
	Polygon		Multipurpose milling	System 300	
	v_c (m/min)	f_z (mm/tooth)	f_z (mm/tooth)	v_c (m/min)	f_z (mm/tooth)
P.1.1	220	0,05–0,25	0,03–0,10	220	0,05–0,15
P.1.2	220	0,05–0,25	0,03–0,10	220	0,05–0,15
P.1.3	190	0,05–0,25	0,03–0,10	190	0,05–0,15
P.1.4	160	0,05–0,25	0,03–0,09	160	0,05–0,15
P.1.5	160	0,05–0,25	0,03–0,09	160	0,05–0,15
P.2.1	150	0,05–0,25	0,03–0,10	150	0,05–0,15
P.2.2	120	0,05–0,25	0,03–0,09	120	0,05–0,15
P.2.3	100	0,05–0,25	0,03–0,09	100	0,05–0,15
P.2.4	90	0,05–0,25	0,03–0,09	90	0,05–0,15
P.3.1	100	0,05–0,20	0,03–0,10	100	0,05–0,12
P.3.2	90	0,05–0,20	0,03–0,08	90	0,05–0,12
P.3.3	80	0,05–0,20	0,03–0,08	80	0,05–0,12
P.4.1	70	0,05–0,20	0,03–0,08	70	0,05–0,12
P.4.2	60	0,05–0,20	0,03–0,08	60	0,05–0,12
M.1.1	130	0,05–0,25	0,03–0,08	130	0,05–0,15
M.2.1	120	0,05–0,25	0,03–0,08	120	0,05–0,15
M.3.1	120	0,05–0,25	0,03–0,08	120	0,05–0,15
K.1.1	140	0,05–0,25	0,03–0,11	140	0,05–0,15
K.1.2	100	0,05–0,25	0,03–0,10	100	0,05–0,15
K.2.1	140	0,05–0,25	0,03–0,11	140	0,05–0,15
K.2.2	120	0,05–0,25	0,03–0,10	120	0,05–0,15
K.3.1	140	0,05–0,25	0,03–0,11	140	0,05–0,15
K.3.2	100	0,05–0,25	0,03–0,10	100	0,05–0,15
N.1.1	700	0,15–0,40	0,04–0,15	700	0,10–0,25
N.1.2	400	0,15–0,40	0,04–0,15	400	0,10–0,25
N.2.1	400	0,15–0,40	0,04–0,15	400	0,10–0,25
N.2.2	300	0,15–0,40	0,04–0,15	300	0,10–0,25
N.2.3	200	0,15–0,40	0,04–0,15	200	0,10–0,25
N.3.1	160	0,15–0,40	0,04–0,15	160	0,10–0,25
N.3.2	160	0,15–0,40	0,04–0,15	160	0,10–0,25
N.3.3	160	0,15–0,40	0,04–0,15	160	0,10–0,25
N.4.1	160	0,15–0,40	0,04–0,15	160	0,10–0,25
S.1.1	100	0,01–0,15	0,01–0,11	100	0,01–0,12
S.1.2	80	0,01–0,15	0,01–0,11	80	0,01–0,12
S.2.1	60	0,01–0,15	0,01–0,11	60	0,01–0,12
S.2.2	40	0,01–0,15	0,01–0,11	40	0,01–0,12
S.2.3	40	0,01–0,15	0,01–0,11	40	0,01–0,12
S.3.1	100	0,01–0,15	0,01–0,11	100	0,01–0,12
S.3.2	80	0,01–0,15	0,01–0,11	80	0,01–0,12
S.3.3	60	0,01–0,15	0,01–0,11	60	0,01–0,12
H.1.1	60	0,01–0,10	0,01–0,06	60	0,01–0,10
H.1.2	50	0,01–0,10	0,01–0,06	50	0,01–0,10
H.1.3	40	0,01–0,10	0,01–0,06	40	0,01–0,10
H.1.4	30	0,01–0,10	0,01–0,06	30	0,01–0,10
H.2.1	60	0,01–0,10	0,01–0,06	60	0,01–0,10
H.3.1	50	0,01–0,10	0,01–0,06	50	0,01–0,10
O.1.1	180	0,05–0,25	0,04–0,15	180	0,05–0,15
O.1.2	220	0,05–0,25	0,04–0,15	220	0,05–0,15
O.2.1	120	0,05–0,25	0,04–0,15	120	0,05–0,15
O.2.2	120	0,05–0,25	0,04–0,15	120	0,05–0,15
O.3.1	800	0,05–0,25	0,04–0,15	800	0,05–0,15

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	53 006 ..., 53 007 ..., 53 008 ..., 53 009 ..., 53 010 ..., 53 011 ..., 53 012 ..., 53 013 ..., 53 015 ..., 53 016 ..., 53 017 ...				53 050 ..., 53 051 ..., 53 052 ..., 53 053 ...	
	Mini Mill	hole (Circular milling)	Thread (Thread milling)	Parting (multipurpose milling)	Micro Mill	
	v_c (m/min)	f_z (mm/tooth)			v_c (m/min)	f_z (mm/tooth)
P.1.1	**120** (80–200)	0,03–0,10	0,05–0,20	0,015–0,05	**70** (40–120)	0,01–0,05
P.1.2	**110** (70–190)	0,03–0,10	0,05–0,20	0,015–0,05	**60** (40–110)	0,01–0,05
P.1.3	**90** (60–150)	0,03–0,10	0,05–0,20	0,015–0,05	**50** (30–80)	0,01–0,05
P.1.4	**90** (60–150)	0,03–0,08	0,05–0,18	0,015–0,04	**50** (30–80)	0,01–0,05
P.1.5	**70** (50–120)	0,03–0,08	0,05–0,18	0,015–0,04	**40** (30–70)	0,01–0,05
P.2.1	**90** (60–150)	0,03–0,10	0,05–0,20	0,015–0,05	**50** (30–80)	0,01–0,05
P.2.2	**70** (50–120)	0,03–0,08	0,05–0,18	0,015–0,04	**40** (30–70)	0,01–0,05
P.2.3	**60** (40–110)	0,02–0,07	0,05–0,16	0,015–0,035	**40** (20–70)	0,01–0,05
P.2.4	**60** (40–100)	0,03–0,07	0,05–0,16	0,015–0,035	**30** (20–60)	0,01–0,04
P.3.1	**60** (40–100)	0,03–0,10	0,05–0,20	0,015–0,05	**30** (20–60)	0,01–0,05
P.3.2	**50** (30–80)	0,02–0,07	0,05–0,16	0,015–0,035	**30** (20–50)	0,01–0,04
P.3.3	**30** (20–60)	0,02–0,07	0,05–0,16	0,015–0,035	**20** (10–40)	0,005–0,03
P.4.1	**80** (50–130)	0,03–0,08	0,05–0,18	0,015–0,04	**40** (30–70)	0,01–0,05
P.4.2	**60** (40–110)	0,02–0,07	0,05–0,16	0,015–0,035	**40** (20–70)	0,01–0,05
M.1.1	**90** (60–150)	0,02–0,07	0,05–0,16	0,015–0,035	**50** (30–80)	0,01–0,03
M.2.1	**60** (40–110)	0,02–0,07	0,05–0,16	0,015–0,035	**40** (20–70)	0,01–0,03
M.3.1	**50** (30–90)	0,02–0,07	0,05–0,16	0,015–0,035	**30** (20–50)	0,01–0,03
K.1.1	**110** (70–190)	0,03–0,10	0,05–0,20	0,015–0,05	**60** (40–110)	0,008–0,06
K.1.2	**80** (50–140)	0,03–0,10	0,05–0,20	0,015–0,05	**50** (30–80)	0,008–0,06
K.2.1	**70** (50–120)	0,03–0,10	0,05–0,20	0,015–0,05	**40** (30–70)	0,008–0,06
K.2.2	**60** (40–100)	0,03–0,10	0,05–0,20	0,015–0,05	**30** (20–60)	0,008–0,06
K.3.1	**110** (70–190)	0,03–0,10	0,05–0,20	0,015–0,05	**60** (40–110)	0,008–0,06
K.3.2	**90** (60–160)	0,03–0,10	0,05–0,20	0,015–0,05	**50** (30–90)	0,008–0,06
N.1.1	**230** (150–390)	0,04–0,15	0,06–0,25	0,02–0,075	**150** (90–260)	0,01–0,06
N.1.2	**220** (140–370)	0,04–0,15	0,06–0,25	0,02–0,075	**140** (90–240)	0,01–0,06
N.2.1	**190** (120–320)	0,04–0,15	0,06–0,25	0,02–0,075	**120** (70–210)	0,01–0,06
N.2.2	**160** (110–270)	0,04–0,15	0,06–0,25	0,02–0,075	**100** (60–180)	0,01–0,06
N.2.3	**90** (60–160)	0,04–0,15	0,06–0,25	0,02–0,075	**60** (40–110)	0,01–0,06
N.3.1	**170** (110–280)	0,04–0,15	0,06–0,25	0,02–0,075	**110** (70–180)	0,01–0,06
N.3.2	**140** (90–240)	0,04–0,15	0,06–0,25	0,02–0,075	**80** (50–150)	0,01–0,06
N.3.3	**120** (80–210)	0,04–0,15	0,06–0,25	0,02–0,075	**80** (50–140)	0,01–0,06
N.4.1	**170** (110–280)	0,04–0,15	0,06–0,25	0,02–0,075	**70** (40–120)	0,01–0,06
S.1.1	60 (40–100)	0,04–0,15	0,06–0,25	0,02–0,075	**30** (20–50)	0,01–0,06
S.1.2	40 (30–70)	0,04–0,15	0,06–0,25	0,02–0,075	**20** (10–30)	0,01–0,06
S.2.1	60 (40–100)	0,04–0,15	0,06–0,25	0,02–0,075	**30** (20–50)	0,01–0,06
S.2.2	50 (30–80)	0,04–0,15	0,06–0,25	0,02–0,075	**20** (10–40)	0,01–0,06
S.2.3	30 (20–60)	0,04–0,15	0,06–0,25	0,02–0,075	**20** (10–30)	0,01–0,06
S.3.1	60 (40–100)	0,04–0,15	0,06–0,25	0,02–0,075	**20** (10–40)	0,01–0,06
S.3.2	30 (20–60)	0,04–0,15	0,06–0,25	0,02–0,075	**20** (10–30)	0,01–0,06
S.3.3	30 (20–50)	0,04–0,15	0,06–0,25	0,02–0,075	**10** (10–20)	0,01–0,06
H.1.1	50 (30–90)	0,02–0,06	0,04–0,14	0,02–0,037	**20** (10–40)	0,005–0,03
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1	40 (30–70)	0,02–0,10		0,015–0,05	**20** (10–40)	0,005–0,03
O.1.1	**180** (120–310)	0,04–0,15	0,06–0,25	0,02–0,037	**80** (50–130)	0,02–0,09
O.1.2	**170** (110–280)	0,04–0,15	0,06–0,25	0,02–0,037	**70** (40–120)	0,02–0,09
O.2.1	**140** (90–230)	0,04–0,15	0,06–0,25	0,02–0,037	**50** (30–100)	0,02–0,09
O.2.2	**100** (70–170)	0,04–0,15	0,06–0,25	0,02–0,037	**40** (30–70)	0,02–0,09
O.3.1	**140** (90–230)	0,005–0,05	0,06–0,25	0,0025–0,025	**60** (40–110)	0,02–0,09

The cutting data depend extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced, inside the bracket, according to the application conditions.

Milling Procedures

Climb milling

Characteristics:

1. Tool rotation direction „right“
2. Toolpath counter clockwise
3. Feed direction „outwards“

▶ Right hand thread

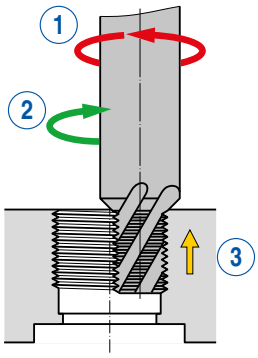

When climb milling, the chip thickness at the end of cut is always 0 (h=0)

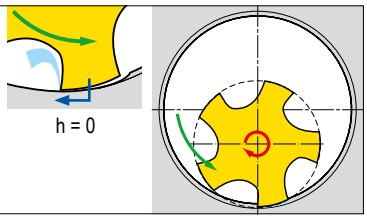

Conventional milling

Characteristics:

1. Tool rotation direction „right“
2. Toolpath clockwise
3. Feed direction „inwards“

▶ Right hand thread

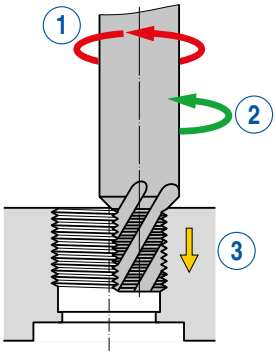

When conventional milling, the chip thickness at the end of cut is always at maximum (h=max)

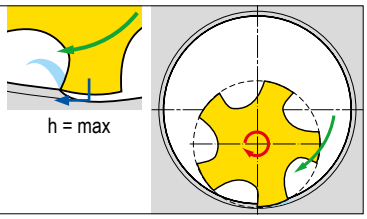

Feed rate calculation

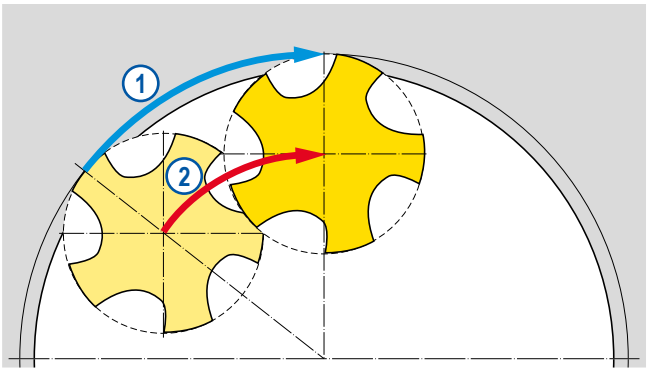

D_w = Effective diameter in mm
n = RPM in min^{-1}
f_z = Feed per tooth in mm
z = Number of cutting edges (radial)
D = Nominal thread diameter = external profile diameter in mm
D_m = Centre path diameter ($D-D_w$) in mm

1 Peripheral feedrate v_f



$$v_f = n \times f_z \times z \quad \text{mm/min.}$$

2 Centerline feedrate v_{fm}



$$v_{fm} = \frac{v_f \times (D - D_w)}{D} \quad \text{mm/min.}$$

Tips for the User

With thread milling there are two different programme possibilities with the feed motion of the tool.

On the one hand the machine controls the feed at the diameter of the tool, on the other hand the feed control is the tool center line.
In order to ascertain which method the machine control uses, the following method should be employed:

- ▲ Enter the thread milling routine into the control.
- ▲ Enter a safety margin into the program, so that the tool runs in air.
- ▲ Run the program through and check the operating time.
- ▲ Compare the actual time with the calculated theoretical time.

If the time is longer than the calculated time the feed is controlling the tool center line.
If the time is shorter than the calculated time the feed is controlling the diameter of the tool.

Numeric calculation of cutting data for thread milling

$$n = \frac{v_c \times 1000}{d \times \pi}$$

$$v_c = \frac{d \times \pi \times n}{1000}$$

$$v_f = f_z \times z \times n$$

$$n = \frac{v_f}{f_z \times z}$$

$$f_z = \frac{v_f}{z \times n}$$

Milling – external contour

$$v_{fm} = \frac{v_f \times (D + d)}{D}$$

$$v_f = \frac{D \times v_{fm}}{(D + d)}$$

Milling – internal contour

$$v_{fm} = \frac{v_f \times (D - d)}{D}$$

$$v_f = \frac{D \times v_{fm}}{(D - d)}$$

Helical plunging

$$U_{arc} = 0{,}25 \times v_{fm}$$

Ramping in the arc

$$U_{arc} = v_{fm}$$

n	rev./min.	=	rpm
v_c	m/min	=	Cutting speed
d	mm	=	Tool diameter
D	mm	=	Nominal thread-Ø
v_f	mm/min.	=	Feed rate at the diameter

v_{fm}	mm/min.	=	Feed rate at the centre
U_{arc}	mm/min.	=	programmed ramping feed rate
f_z	mm	=	Feed per tooth
z	Piece	=	number of cutting edges of the cutter

7

Correction values for the internal thread milling

The milling radius correction which is entered into the machine control, can be calculated as follows:

half the cutter Ø – 0.05 x pitch P

Example:
M30x3
Cutter-Ø:
20 mm

$$\frac{Ø20}{2} - (0{,}05 \times 3) = \underline{9{,}85\ mm}$$

9,85 mm is the milling radius to be entered into the machine control

Coatings

AlCrN
- ▲ High-performance AlCrN multilayer coating
- ▲ max.application temperature: > 1100 °C

CWX 500
- ▲ Carbide, TiAlN-coated
- ▲ The universal carbide grade for almost all materials

TiAlN
- ▲ TiAlN multilayer coating
- ▲ Maximum application temperature: 900 °C

TiCN
- ▲ TiCN multilayer coating
- ▲ Maximum application temperature: 450 °C

TiN
- ▲ TiN coating
- ▲ Maximum application temperature: 450 °C

Ti 500
- ▲ TiAlN-coating
- ▲ Maximum application temperature: 500 °C

Ti 600
- ▲ TiAlN multilayer coating
- ▲ Maximum application temperature: 650 °C

Ti 601
- ▲ High-performance TiAlN multilayer coating
- ▲ Maximum application temperature: 900 °C

Ti 602
- ▲ TiCN multilayer coating
- ▲ Maximum application temperature: 400 °C

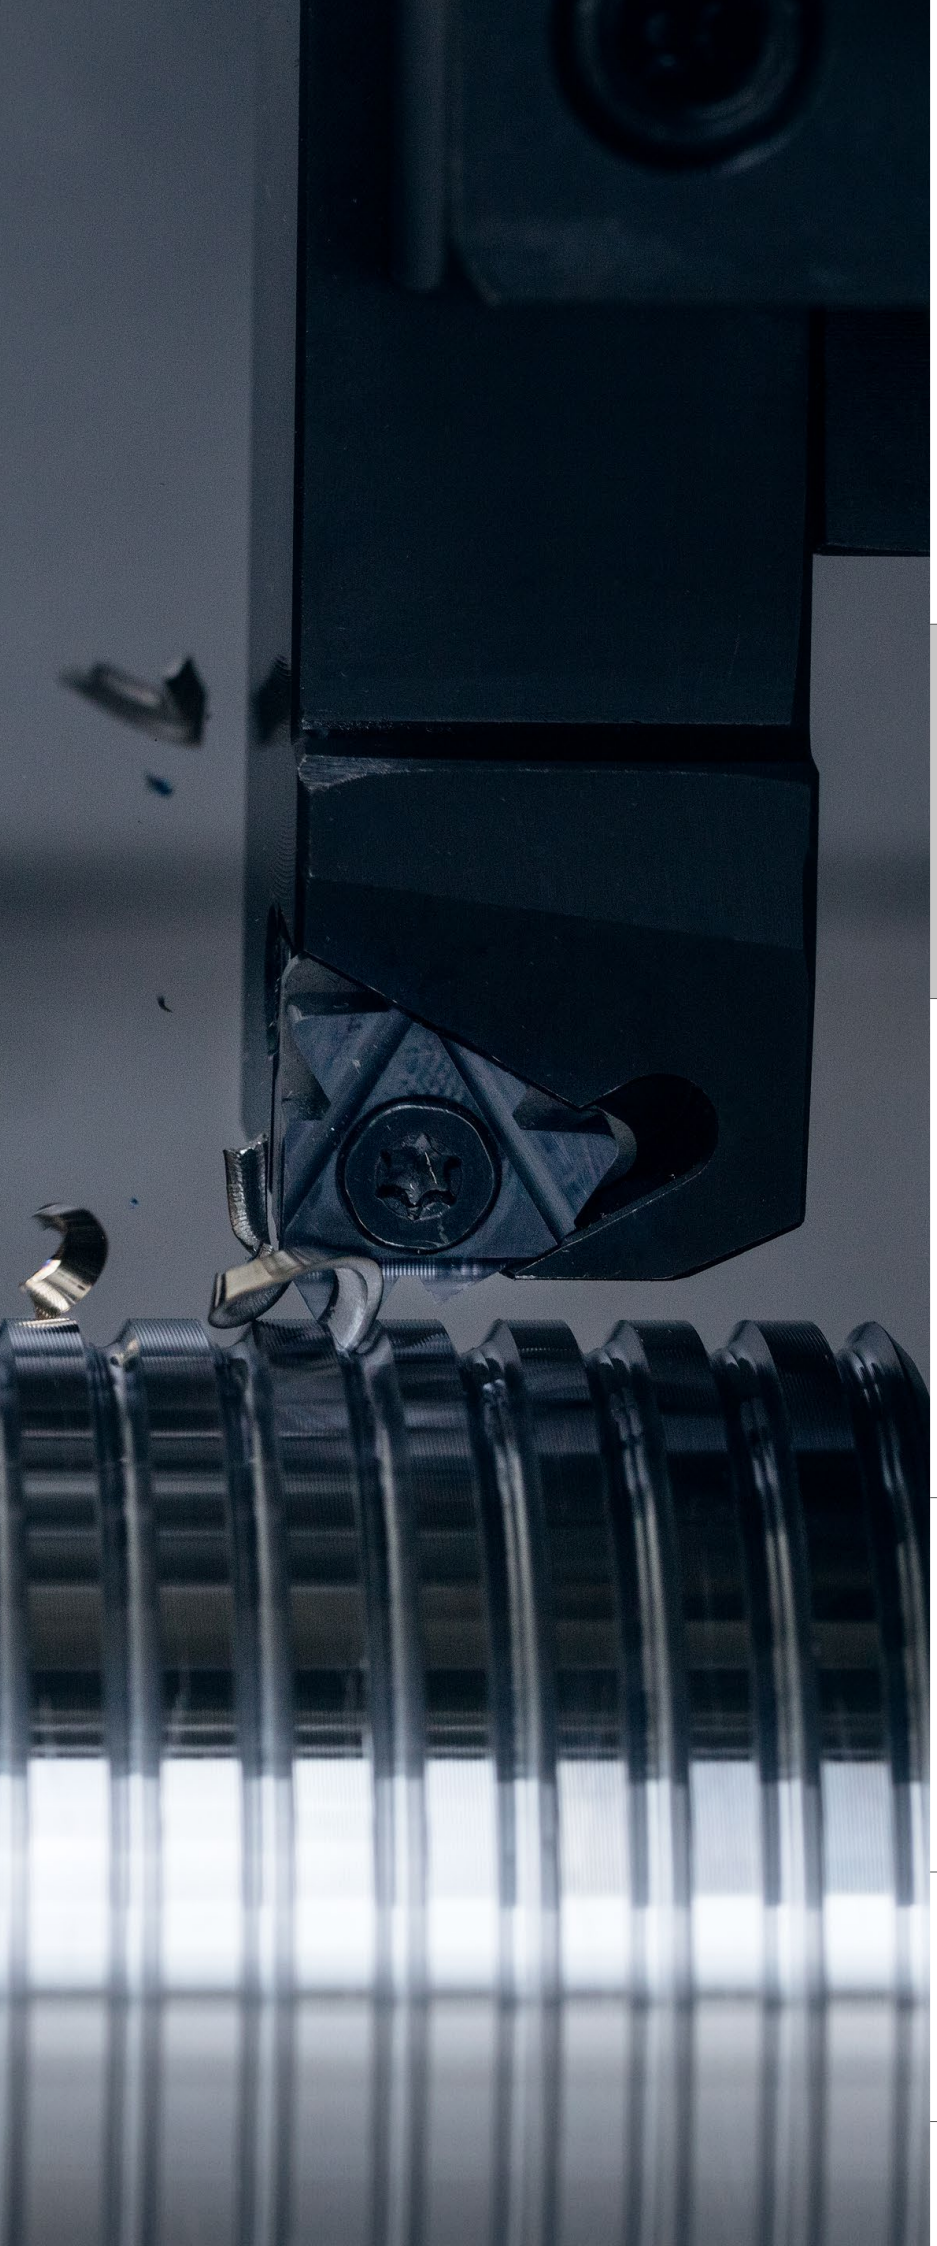

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	5
Toolfinder	4+5
Product programme	6–42
Shims	43
Technical Information	
Cutting Data	44+45
Thread turning methods	46
Pitch angle	47
Designation Key	48+49
Troubleshooting	50
Grade description and profile explanation	51

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Toolfinder

MiniCut

M	G	Tr
Full profile Partial profile	Partial profile	Partial profile

→ **Chapter 12 – Miniature turning tools**

UltraMini

M	MF	G	Tr
Full profile Partial profile	Full profile Partial profile	Partial profile	Partial profile

→ **Chapter 12 – Miniature turning tools**

VertiClamp

→ **Sliding head tooling catalogue**

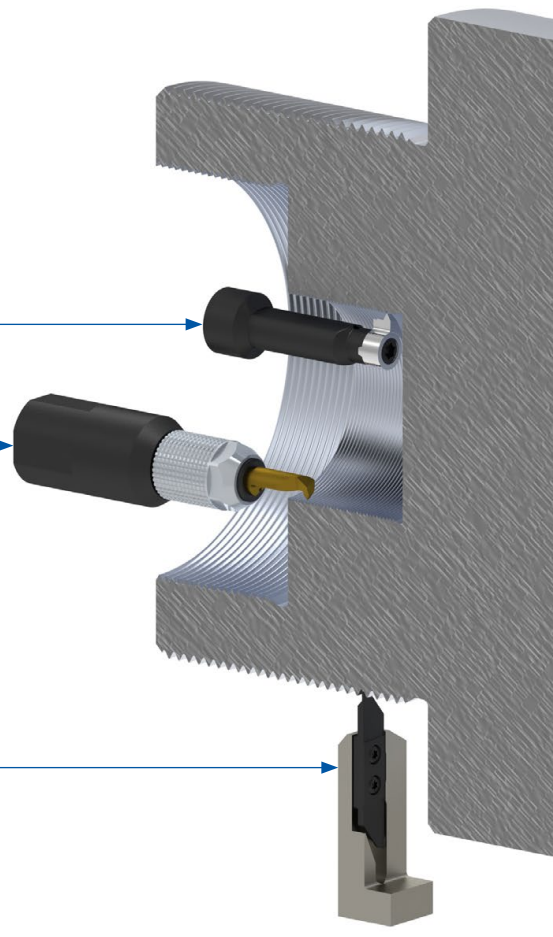

Symbol explanation

Flank angle

- 30° — Flank angle 30° (Trapezoidal thread)
- 30° — Flank angle 30° (Round thread)
- 55° — Flank angle 55°
- 60° — Flank angle 60°
- 80° — Flank angle 80° (Conduit thread)

TP / TPI = Pitch
NT = Number of flutes
● = **Main Application**
○ = Extended application

Thread

- **M** — ISO metric coarse thread DIN 13
- **MF** — ISO Metric fine thread DIN 13
- **BSW** — British Whitworth thread BS 84
- **UN** — American unified thread BS 1580 (ASME B 1.1)
- **UNC** — American unified thread (coarse) BS 1580 (ASME B 1.1)
- **UNF** — American unified thread (fine) BS 1580 (ASME B 1.1)
- **UNEF** — American unified thread (extra fine) BS 1580 (ASME B 1.1)
- **NPT** — American pipe thread ANSI/ASME B 1.20.3
- **Tr** — Trapezoidal thread DIN 103
- **Rd** — Round Thread DIN 405
- **Pg** — Conduit Threads DIN 40430

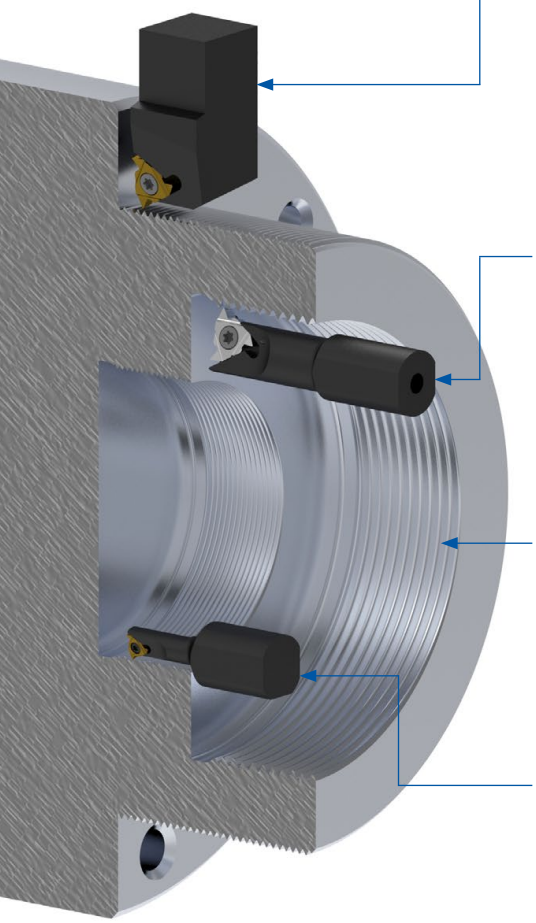

Standard external thread turning

Full profile

M	BSW	UN	UNC	UNF	UNEF	NPT	Tr	Rd	Pg
6+7	11+12	15+16	15+16	15+16	15+16	19	21	24	26

Partial profile

60°	55°
28	30

Multi-cutting edge

M
10

Suitable holders can be found on → page 32+33

Standard internal thread turning

Full profile

M	BSW	UN	UNC	UNF	UNEF	NPT	Tr	Rd	Pg
8+9	13+14	17+18	17+18	17+18	17+18	20	22	25	27

Partial profile

60°	55°
29	31

Suitable holders can be found on → page 34–36



Internal threading with MaxiChange – our exchangeable head system

→ Chapter 9 – Turning Tools

Mini 06

Full profile

M	BSW
37	37

Partial profile

60°	55°
38	38

Mini 08

Full profile

M
39

Partial profile

60°	55°
39+40	40+41

Suitable holders can be found on → page 42

Information on the different thread profiles can be found on → **Page 51.**

8

Right hand external thread turning insert

▲ Full profile
▲ CCN7525 grade with sintered chip breaker for universal application

M | MF | 60°



CCN20	CWN1525	HCN2525	CWK20	CCN7525
				

Designation	TP	INSL	PDX	PDY	ER 71 220 ... EUR X3		ER 71 220 ... EUR X3		ER 71 220 ... EUR X3		ER 71 220 ... EUR Y1		ER 71 220 ... EUR X3	
	mm	mm	mm	mm										
11 ER 0,35	0,35	11	0,8	0,4	23,72	**204**								
11 ER 0,4	0,40	11	0,7	0,4	23,72	**206**								
11 ER 0,45	0,45	11	0,7	0,4	23,72	**208**								
11 ER 0,5	0,50	11	0,6	0,6	23,72	**209**								
11 ER 0,6	0,60	11	0,6	0,6	23,72	**210**								
11 ER 0,7	0,70	11	0,6	0,6	23,72	**211**								
11 ER 0,75	0,75	11	0,6	0,6	23,72	**212**								
11 ER 0,8	0,80	11	0,6	0,6	23,72	**213**								
11 ER 1,0	1,00	11	0,7	0,7	22,17	**214**								
11 ER 1,25	1,25	11	0,8	0,9	22,17	**216**								
11 ER 1,5	1,50	11	0,8	1,0	22,17	**218**								
11 ER 1,75	1,75	11	0,8	1,1	22,17	**220**								
16 ER 0,35	0,35	16	0,8	0,4	23,72	**234**			28,84	**734**	15,49	**634**		
16 ER 0,4	0,40	16	0,7	0,4	23,72	**236**			28,84	**736**	15,49	**636**		
16 ER 0,45	0,45	16	0,7	0,4	23,72	**238**					15,49	**638**		
16 ER 0,5	0,50	16	0,6	0,6	23,72	**240**	19,91	**140**	21,87	**740**	15,49	**640**	21,87	**940**
16 ER 0,7	0,70	16	0,6	0,6	23,72	**241**	21,32	**141**	23,16	**741**	15,49	**641**		
16 ER 0,75	0,75	16	0,6	0,6	23,72	**242**	19,91	**142**	21,87	**742**	15,49	**642**	21,87	**942**
16 ER 0,8	0,80	16	0,6	0,6	23,72	**243**	19,91	**143**	21,87	**743**	15,49	**643**	21,87	**943**
16 ER 1,0	1,00	16	0,7	0,7	22,17	**244**	19,19	**144**	21,32	**744**	13,98	**644**	21,32	**944**
16 ER 1,25	1,25	16	0,8	0,9	22,17	**246**	19,19	**146**	21,32	**746**	13,98	**646**	21,32	**946**
16 ER 1,5	1,50	16	0,8	1,0	22,17	**248**	19,19	**148**	21,32	**748**	13,98	**648**	21,32	**948**
16 ER 1,75	1,75	16	0,9	1,2	22,17	**250**	19,19	**150**	21,32	**750**	13,98	**650**		
16 ER 2,0	2,00	16	1,0	1,3	22,17	**252**	19,19	**152**	21,32	**752**	13,98	**652**	21,32	**952**
16 ER 2,5	2,50	16	1,1	1,5	22,17	**254**	19,19	**154**	21,32	**754**	13,98	**654**	21,32	**954**
16 ER 3,0	3,00	16	1,2	1,6	22,17	**256**	19,19	**156**	21,32	**756**	13,98	**656**	21,32	**956**
22 ER 3,5	3,50	22	1,6	2,3	33,24	**270**	29,84	**170**	32,82	**770**				
22 ER 4,0	4,00	22	1,6	2,3	33,24	**272**	31,40	**172**	33,96	**772**				
22 ER 4,5	4,50	22	1,7	2,4	33,24	**274**	33,66	**174**	36,63	**774**				
22 ER 5,0	5,00	22	1,7	2,5	33,24	**276**	33,66	**176**	36,63	**776**				
22 ER 5,5	5,50	22	1,7	2,6			33,66	**178**						
22 ER 5,5	5,50	22	1,9	2,7	33,24	**278**								
22 EN 5,5	5,50	22	2,3	11,0	41,91	**282** [1]								
22 ER 6,0	6,00	22	1,9	2,7			33,66	**180**	36,63	**780**				
22 ER 6,0	6,00	22	2,0	2,9	33,24	**280**								
22 EN 6,0	6,00	22	2,6	11,0	41,91	**284** [1]								

P	●	●	○			●
M	●	○	●		○	●
K	●	●	○		●	●
N		●	○		●	
S	○		○		○	●
H	○		○			○
O		○				

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

Left hand external thread turning insert

▲ Full profile

M | MF | 60°

CCN20 | CWN1525







Designation	TP mm	INSL mm	PDX mm	PDY mm	EL 71 222 ... EUR X3		EL 71 222 ... EUR X3	
11 EL 0,35	0,35	11	0,8	0,4	23,72	**204**		
11 EL 0,4	0,40	11	0,7	0,4	23,72	**206**		
11 EL 0,45	0,45	11	0,7	0,4	23,72	**208**		
11 EL 0,5	0,50	11	0,6	0,6	23,72	**209**		
11 EL 0,6	0,60	11	0,6	0,6	23,72	**210**		
11 EL 0,7	0,70	11	0,6	0,6	23,72	**211**		
11 EL 0,75	0,75	11	0,6	0,6	23,72	**212**		
11 EL 0,8	0,80	11	0,6	0,6	23,72	**213**		
11 EL 1,0	1,00	11	0,7	0,7	22,17	**214**		
11 EL 1,25	1,25	11	0,8	0,9	22,17	**216**		
11 EL 1,5	1,50	11	0,8	1,0	22,17	**218**		
11 EL 1,75	1,75	11	0,8	1,1	22,17	**220**		
16 EL 0,35	0,35	16	0,8	0,4	23,72	**234**		
16 EL 0,4	0,40	16	0,7	0,4	23,72	**236**		
16 EL 0,45	0,45	16	0,7	0,4	23,72	**238**		
16 EL 0,5	0,50	16	0,6	0,6	23,72	**240**		
16 EL 0,7	0,70	16	0,6	0,6	23,72	**241**		
16 EL 0,75	0,75	16	0,6	0,6	23,72	**242**		
16 EL 0,8	0,80	16	0,6	0,6	23,72	**243**		
16 EL 1,0	1,00	16	0,7	0,7	22,17	**244**	20,45	**144**
16 EL 1,25	1,25	16	0,8	0,9	22,17	**246**	21,75	**146**
16 EL 1,5	1,50	16	0,8	1,0	22,17	**248**	20,45	**148**
16 EL 1,75	1,75	16	0,9	1,2	22,17	**250**		
16 EL 2,0	2,00	16	1,0	1,3	22,17	**252**	21,75	**152**
16 EL 2,5	2,50	16	1,1	1,5	22,17	**254**		
16 EL 3,0	3,00	16	1,2	1,6	22,17	**256**	25,28	**156**
22 EL 3,5	3,50	22	1,6	2,3	33,24	**270**		
22 EL 4,0	4,00	22	1,6	2,3	33,24	**272**		
22 EL 4,5	4,50	22	1,7	2,4	33,24	**274**		
22 EL 5,0	5,00	22	1,7	2,5	33,24	**276**		
22 EL 5,5	5,50	22	1,9	2,7	33,24	**278**		
22 EL 6,0	6,00	22	2,0	2,9	33,24	**280**		

P	●	●
M	●	○
K	●	●
N		●
S	○	
H	○	
O		○

→ v_c Page 45

8

Right hand internal thread turning insert

▲ Full profile
▲ CCN7525 grade with sintered chip breaker for universal application

M | MF | 60°



CCN20	CWN1525	HCN2525	CWK20	CCN7525
				

Designation	TP	INSL	PDX	PDY	IR 71 224 ... EUR X3		IR 71 224 ... EUR X3		IR 71 224 ... EUR X3		IR 71 224 ... EUR Y1		IR 71 224 ... EUR X3	
	mm	mm	mm	mm										
11 IR 0,35	0,35	11	0,8	0,3	23,72	**204**								
11 IR 0,4	0,40	11	0,8	0,4	23,72	**206**								
11 IR 0,45	0,45	11	0,8	0,4	23,72	**208**								
11 IR 0,5	0,50	11	0,6	0,6	23,72	**210**								
11 IR 0,7	0,70	11	0,6	0,6	23,72	**211**								
11 IR 0,75	0,75	11	0,6	0,6	23,72	**212**							26,16	**912**
11 IR 0,8	0,80	11	0,6	0,6	23,72	**213**			29,55	**713**				
11 IR 1,0	1,00	11	0,6	0,6									21,32	**914**
11 IR 1,0	1,00	11	0,6	0,7	22,17	**214**	19,19	**114**	21,32	**714**				
11 IR 1,25	1,25	11	0,8	0,9	22,17	**216**								
11 IR 1,5	1,50	11	0,8	0,9									21,32	**918**
11 IR 1,5	1,50	11	0,8	1,0	22,17	**218**	19,19	**118**	21,32	**718**				
11 IR 1,75	1,75	11	0,9	1,1	22,17	**220**								
11 IR 2,0	2,00	11	0,8	0,9			19,19	**122**	21,32	**722**				
11 IR 2,0	2,00	11	0,9	1,1	22,17	**222**								
11 IR 2,5	2,50	11	0,8	1,2			21,75	**124**	23,72	**724**				
11 IR 2,5	2,50	11	0,9	1,1	22,17	**224**								
16 IR 0,35	0,35	16	0,8	0,4	23,72	**234**					15,49	**634**		
16 IR 0,4	0,40	16	0,7	0,4	23,72	**236**					15,49	**636**		
16 IR 0,45	0,45	16	0,7	0,4	23,72	**238**					15,49	**638**		
16 IR 0,5	0,50	16	0,6	0,6	23,72	**240**					15,49	**640**		
16 IR 0,7	0,70	16	0,6	0,6	23,72	**241**					15,49	**641**		
16 IR 0,75	0,75	16	0,6	0,6	23,72	**242**	23,99	**142**	26,16	**742**	15,49	**642**		
16 IR 0,8	0,80	16	0,6	0,6	23,72	**243**					15,49	**643**		
16 IR 1,0	1,00	16	0,6	0,7			19,19	**144**	21,32	**744**			21,32	**944**
16 IR 1,0	1,00	16	0,7	0,7	22,17	**244**					13,98	**644**		
16 IR 1,25	1,25	16	0,8	0,9	22,17	**246**			22,30	**746**	13,98	**646**	22,30	**946**
16 IR 1,5	1,50	16	0,8	1,0	22,17	**248**	19,19	**148**	21,32	**748**	13,98	**648**	21,32	**948**
16 IR 1,75	1,75	16	0,9	1,2	22,17	**250**			26,16	**750**	13,98	**650**		
16 IR 2,0	2,00	16	1,0	1,3	22,17	**252**	19,19	**152**	21,32	**752**	13,98	**652**	21,32	**952**
16 IR 2,5	2,50	16	1,1	1,5	22,17	**254**	19,19	**154**	21,32	**754**	13,98	**654**	21,32	**954**
16 IR 3,0	3,00	16	1,1	1,5	22,17	**256**	19,19	**156**	21,32	**756**	13,98	**656**	21,32	**956**
22 IR 3,5	3,50	22	1,6	2,3	33,24	**270**	31,40	**170**	33,96	**770**				
22 IR 4,0	4,00	22	1,6	2,3	33,24	**272**	31,40	**172**	33,96	**772**				
22 IR 4,5	4,50	22	1,6	2,4			33,66	**174**	36,63	**774**				
22 IR 4,5	4,50	22	1,7	2,4	33,24	**274**								
22 IR 5,0	5,00	22	1,6	2,3			33,66	**176**						
22 IR 5,0	5,00	22	1,7	2,5	33,24	**276**								
22 IR 5,5	5,50	22	1,6	2,3			34,10	**178**						
22 IR 5,5	5,50	22	1,9	2,7	33,24	**278**								
22 IN 5,5	5,50	22	2,3	11,0	41,91	**282** [1]								
22 IR 6,0	6,00	22	1,6	2,4			33,66	**180**						
22 IR 6,0	6,00	22	2,0	2,9	33,24	**280**								
22 IN 6,0	6,00	22	2,6	11,0	41,91	**284** [1]								

P	●	●	○		●
M	●	○	●	○	●
K	●	●	○	●	●
N		●	○	●	
S	○		○	○	●
H	○		○		○
O		○			

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

Left hand internal thread turning insert

▲ Full profile

M | MF | 60°

CCN20 | CWN1525







Designation	TP mm	INSL mm	PDX mm	PDY mm	IL 71 226 ... EUR X3		IL 71 226 ... EUR X3	
11 IL 0,35	0,35	11	0,8	0,3	23,72	**204**		
11 IL 0,4	0,40	11	0,8	0,4	23,72	**206**		
11 IL 0,45	0,45	11	0,8	0,4	23,72	**208**		
11 IL 0,5	0,50	11	0,6	0,6	23,72	**210**		
11 IL 0,7	0,70	11	0,6	0,6	23,72	**211**		
11 IL 0,75	0,75	11	0,6	0,6	23,72	**212**		
11 IL 0,8	0,80	11	0,6	0,6	23,72	**213**		
11 IL 1,0	1,00	11	0,6	0,7	22,17	**214**		
11 IL 1,25	1,25	11	0,8	0,9	22,17	**216**		
11 IL 1,5	1,50	11	0,8	1,0	22,17	**218**		
11 IL 1,75	1,75	11	0,9	1,1	22,17	**220**		
11 IL 2,0	2,00	11	0,9	1,1	22,17	**222**		
11 IL 2,5	2,50	11	0,9	1,1	22,17	**224**		
16 IL 0,35	0,35	16	0,8	0,4	23,72	**234**		
16 IL 0,4	0,40	16	0,7	0,4	23,72	**236**		
16 IL 0,45	0,45	16	0,7	0,4	23,72	**238**		
16 IL 0,5	0,50	16	0,6	0,6	23,72	**240**		
16 IL 0,7	0,70	16	0,6	0,6	23,72	**241**		
16 IL 0,75	0,75	16	0,6	0,6	23,72	**242**		
16 IL 0,8	0,80	16	0,6	0,6	23,72	**243**		
16 IL 1,0	1,00	16	0,6	0,7			25,28	**144**
16 IL 1,0	1,00	16	0,7	0,7	22,17	**244**		
16 IL 1,25	1,25	16	0,8	0,9	22,17	**246**		
16 IL 1,5	1,50	16	0,8	1,0	22,17	**248**	24,16	**148**
16 IL 1,75	1,75	16	0,9	1,2	22,17	**250**		
16 IL 2,0	2,00	16	1,0	1,3	22,17	**252**	21,75	**152**
16 IL 2,5	2,50	16	1,1	1,5	22,17	**254**		
16 IL 3,0	3,00	16	1,2	1,6	22,17	**256**		
22 IL 3,5	3,50	22	1,6	2,3	41,63	**270**		
22 IL 4,0	4,00	22	1,6	2,3	41,63	**272**		
22 IL 4,5	4,50	22	1,7	2,4	41,63	**274**		
22 IL 5,0	5,00	22	1,7	2,5	41,63	**276**		
22 IL 5,5	5,50	22	1,9	2,7	41,63	**278**		
22 IL 6,0	6,00	22	2,0	2,9	41,63	**280**		

P	●	●
M	●	○
K	●	●
N		●
S	○	
H	○	
O		○

→ v_c Page 45

8

Right hand external thread turning insert

▲ Multi edge insert



HCN2525





ER

71 221 ...

Designation	TP mm	INSL mm	PDX mm	PDY mm	NT	EUR X3	
16 ER 1,0 3M	1,0	16	1,7	2,5	3	46,46	**700**
16 ER 1,5 2M	1,5	16	1,5	2,3	2	44,63	**702**

P	○
M	●
K	○
N	○
S	○
H	○
O	

→ v_c Page 45

Right hand external thread turning insert

▲ Full profile
▲ CCN7525 grade with sintered chip breaker for universal application

BSW | 55°



CCN20	CWN1525	HCN2525	CWK20	CCN7525
				

Designation	TPI	INSL	PDX	PDY	ER 71 228 ... EUR X3		ER 71 228 ... EUR X3		ER 71 228 ... EUR X3		ER 71 228 ... EUR Y1		ER 71 228 ... EUR X3	
	1/"	mm	mm	mm										
11 ER 72	72,0	11	0,7	0,4	27,97	**202**								
11 ER 60	60,0	11	0,7	0,4	27,97	**204**								
11 ER 56	56,0	11	0,7	0,4	27,97	**206**								
11 ER 48	48,0	11	0,6	0,6	27,97	**208**								
11 ER 40	40,0	11	0,6	0,6	27,97	**210**								
11 ER 36	36,0	11	0,6	0,6	27,97	**212**								
11 ER 32	32,0	11	0,6	0,6	27,97	**214**								
11 ER 28	28,0	11	0,6	0,7	25,71	**216**								
11 ER 26	26,0	11	0,7	0,8	25,71	**218**								
11 ER 24	24,0	11	0,7	0,8	25,71	**220**								
11 ER 22	22,0	11	0,8	0,9	25,71	**222**								
11 ER 20	20,0	11	0,8	0,9	25,71	**224**								
11 ER 19	19,0	11	0,8	1,0	25,71	**226**								
11 ER 18	18,0	11	0,8	1,0	25,71	**228**								
11 ER 16	16,0	11	0,9	1,1	25,71	**230**								
11 ER 14	14,0	11	0,9	1,1	25,71	**232**								
16 ER 40	40,0	16	0,6	0,6	27,97	**240**					18,19	**640**		
16 ER 36	36,0	16	0,6	0,6	27,97	**242**					18,19	**642**		
16 ER 32	32,0	16	0,6	0,6	27,97	**244**					18,19	**644**		
16 ER 28	28,0	16	0,6	0,7	25,71	**246**	24,71	**146**	26,99	**746**	16,76	**646**		
16 ER 26	26,0	16	0,7	0,7					30,11	**748**				
16 ER 26	26,0	16	0,7	0,8	25,71	**248**					16,76	**648**		
16 ER 24	24,0	16	0,7	0,8	25,71	**250**					16,76	**650**		
16 ER 22	22,0	16	0,8	0,9	25,71	**252**					16,76	**652**		
16 ER 20	20,0	16	0,8	0,9	25,71	**254**			30,11	**754**	16,76	**654**		
16 ER 19	19,0	16	0,8	1,0	25,71	**256**	22,17	**156**	24,44	**756**	16,76	**656**	24,44	**956**
16 ER 18	18,0	16	0,8	1,0	25,71	**258**					16,76	**658**		
16 ER 16	16,0	16	0,9	1,1	25,71	**260**	27,42	**160**	29,40	**760**	16,76	**660**		
16 ER 14	14,0	16	1,0	1,2	25,71	**262**	22,17	**162**	24,44	**762**	16,76	**662**	24,44	**962**
16 ER 12	12,0	16	1,1	1,4	25,71	**264**	27,42	**164**	29,40	**764**	16,76	**664**		
16 ER 11	11,0	16	1,1	1,5	25,71	**266**	22,17	**166**	24,44	**766**	16,76	**666**	24,44	**966**
16 ER 10	10,0	16	1,1	1,5	25,71	**268**					16,76	**668**		
16 ER 9	9,0	16	1,2	1,7	25,71	**270**					16,76	**670**		
16 ER 8	8,0	16	1,2	1,5	25,71	**272**					16,76	**672**		
22 ER 7	7,0	22	1,6	2,3	39,76	**280**								
22 ER 6	6,0	22	1,6	2,3	39,76	**282**								
22 ER 5	5,0	22	1,7	2,4	39,76	**284**								
22 EN 4,5	4,5	22	2,3	11,0	42,76	**290** [1]								
22 EN 4	4,0	22	1,8	11,0	42,76	**292** [1]								

P	●	●	○		●
M	●	○	●	○	●
K	●	●	○	●	●
N		●	○	●	
S	○		○	○	●
H	○		○		○
O		○			

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

8

Left hand external thread turning insert

▲ Full profile

BSW

CCN20





EL

71 229 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
11 EL 72	72	11	0,7	0,4	32,11	**202**
11 EL 60	60	11	0,7	0,4	32,11	**204**
11 EL 56	56	11	0,7	0,4	32,11	**206**
11 EL 48	48	11	0,6	0,6	32,11	**208**
11 EL 40	40	11	0,6	0,6	32,11	**210**
11 EL 36	36	11	0,6	0,6	32,11	**212**
11 EL 32	32	11	0,6	0,6	32,11	**214**
11 EL 28	28	11	0,6	0,7	30,11	**216**
11 EL 26	26	11	0,7	0,8	30,11	**218**
11 EL 24	24	11	0,7	0,8	30,11	**220**
11 EL 22	22	11	0,8	0,9	30,11	**222**
11 EL 20	20	11	0,8	0,9	30,11	**224**
11 EL 19	19	11	0,8	1,0	30,11	**226**
11 EL 18	18	11	0,8	1,0	30,11	**228**
11 EL 16	16	11	0,9	1,1	30,11	**230**
11 EL 14	14	11	0,9	1,1	25,71	**232**
16 EL 40	40	16	0,6	0,6	32,11	**240**
16 EL 36	36	16	0,6	0,6	32,11	**242**
16 EL 32	32	16	0,6	0,6	32,11	**244**
16 EL 28	28	16	0,6	0,7	30,11	**246**
16 EL 26	26	16	0,7	0,8	30,11	**248**
16 EL 24	24	16	0,7	0,8	30,11	**250**
16 EL 22	22	16	0,8	0,9	30,11	**252**
16 EL 20	20	16	0,8	0,9	30,11	**254**
16 EL 19	19	16	0,8	1,0	30,11	**256**
16 EL 18	18	16	0,8	1,0	30,11	**258**
16 EL 16	16	16	0,9	1,1	30,11	**260**
16 EL 14	14	16	1,0	1,2	25,71	**262**
16 EL 12	12	16	1,1	1,4	30,11	**264**
16 EL 11	11	16	1,1	1,5	25,71	**266**
16 EL 10	10	16	1,1	1,5	34,38	**268**
16 EL 9	9	16	1,2	1,7	34,38	**270**
16 EL 8	8	16	1,2	1,5	34,38	**272**
22 EL 7	7	22	1,6	2,3	46,59	**280**
22 EL 6	6	22	1,6	2,3	46,59	**282**
22 EL 5	5	22	1,7	2,4	47,60	**284**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand internal thread turning insert

▲ Full profile
▲ CCN7525 grade with sintered chip breaker for universal application

BSW | 55°



	CCN20	CWN1525	HCN2525	CCN7525
				
	IR	IR	IR	IR
	71 230 ...	71 230 ...	71 230 ...	71 230 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3		EUR X3		EUR X3		EUR X3	
11 IR 48	48	11	0,6	0,6	27,97	**206**						
11 IR 40	40	11	0,6	0,6	27,97	**208**						
11 IR 36	36	11	0,6	0,6	27,97	**210**						
11 IR 32	32	11	0,6	0,6	27,97	**212**						
11 IR 28	28	11	0,6	0,7	25,71	**214**						
11 IR 26	26	11	0,7	0,8	25,71	**216**						
11 IR 24	24	11	0,7	0,8	25,71	**218**						
11 IR 22	22	11	0,8	0,9	25,71	**220**						
11 IR 20	20	11	0,8	0,9	25,71	**222**						
11 IR 19	19	11	0,8	1,0	25,71	**224**	23,60	**124**	25,86	**724**		
11 IR 19	19	11	0,8	0,9							25,86	**924**
11 IR 18	18	11	0,8	1,0	25,71	**226**						
11 IR 16	16	11	0,9	1,1	25,71	**228**						
11 IR 14	14	11	0,9	1,1	25,71	**230**	23,60	**130**	25,86	**730**		
11 IR 14	14	11	0,8	0,9							25,86	**930**
16 IR 40	40	16	0,6	0,6	27,97	**240**						
16 IR 36	36	16	0,6	0,6	27,97	**242**						
16 IR 32	32	16	0,6	0,6	27,97	**244**						
16 IR 28	28	16	0,6	0,7	25,71	**246**						
16 IR 26	26	16	0,7	0,8	25,71	**248**						
16 IR 24	24	16	0,7	0,8	25,71	**250**						
16 IR 22	22	16	0,8	0,9	25,71	**252**						
16 IR 20	20	16	0,8	0,9	25,71	**254**						
16 IR 19	19	16	0,8	1,0	25,71	**256**						
16 IR 18	18	16	0,8	1,0	25,71	**258**						
16 IR 16	16	16	0,9	1,1	25,71	**260**			30,11	**760**		
16 IR 14	14	16	1,0	1,2	25,71	**262**	22,17	**162**	24,44	**762**	24,44	**962**
16 IR 12	12	16	1,1	1,4	25,71	**264**						
16 IR 11	11	16	1,1	1,5	25,71	**266**	22,17	**166**	24,44	**766**	24,44	**966**
16 IR 10	10	16	1,1	1,5	25,71	**268**						
16 IR 9	9	16	1,2	1,7	25,71	**270**						
16 IR 8	8	16	1,2	1,5	25,71	**272**						
22 IR 7	7	22	1,6	2,3	40,22	**280**						
22 IR 6	6	22	1,6	2,3	40,22	**282**						
22 IR 5	5	22	1,7	2,4	40,22	**284**						

P	●	●	○	●
M	●	○	●	●
K	●	●	○	●
N		●	○	
S	○		○	●
H	○		○	○
O		○		

→ v_c Page 45

8

Left hand internal thread turning insert

▲ Full profile

BSW

CCN20





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IL 71 231 ... EUR X3	
11 IL 48	48	11	0,6	0,6	32,11	**206**
11 IL 40	40	11	0,6	0,6	32,11	**208**
11 IL 36	36	11	0,6	0,6	30,11	**210**
11 IL 32	32	11	0,6	0,6	30,11	**212**
11 IL 28	28	11	0,6	0,7	30,11	**214**
11 IL 26	26	11	0,7	0,8	30,11	**216**
11 IL 24	24	11	0,7	0,8	30,11	**218**
11 IL 22	22	11	0,8	0,9	30,11	**220**
11 IL 20	20	11	0,8	0,9	30,11	**222**
11 IL 19	19	11	0,8	1,0	30,11	**224**
11 IL 18	18	11	0,8	1,0	30,11	**226**
11 IL 16	16	11	0,9	1,1	30,11	**228**
11 IL 14	14	11	0,9	1,1	25,71	**230**
16 IL 40	40	16	0,6	0,6	32,11	**240**
16 IL 36	36	16	0,6	0,6	32,11	**242**
16 IL 32	32	16	0,6	0,6	32,11	**244**
16 IL 28	28	16	0,6	0,7	30,11	**246**
16 IL 26	26	16	0,7	0,8	30,11	**248**
16 IL 24	24	16	0,7	0,8	30,11	**250**
16 IL 22	22	16	0,8	0,9	30,11	**252**
16 IL 20	20	16	0,8	0,9	30,11	**254**
16 IL 19	19	16	0,8	1,0	30,11	**256**
16 IL 18	18	16	0,8	1,0	30,11	**258**
16 IL 16	16	16	0,9	1,1	30,11	**260**
16 IL 14	14	16	1,0	1,2	25,71	**262**
16 IL 12	12	16	1,1	1,4	30,11	**264**
16 IL 11	11	16	1,1	1,5	25,71	**266**
16 IL 10	10	16	1,1	1,5	34,38	**268**
16 IL 9	9	16	1,2	1,7	34,38	**270**
16 IL 8	8	16	1,2	1,5	34,38	**272**
22 IL 7	7	22	1,6	2,3	46,59	**280**
22 IL 6	6	22	1,6	2,3	46,59	**282**
22 IL 5	5	22	1,7	2,4	46,59	**284**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand external thread turning insert

▲ Full profile
▲ CCN7525 grade with sintered chip breaker for universal application

UN | UNC | UNF | UNEF | 60°



CCN20 | CWN1525 | HCN2525 | CCN7525






Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	ER 71 264 ... EUR X3		ER 71 264 ... EUR X3		ER 71 264 ... EUR X3		ER 71 264 ... EUR X3	
11 ER 72	72,0	11	0,8	0,4	28,13	**202**						
11 ER 64	64,0	11	0,8	0,4	28,13	**204**						
11 ER 56	56,0	11	0,7	0,4	28,13	**206**						
11 ER 48	48,0	11	0,6	0,6	28,13	**208**						
11 ER 44	44,0	11	0,6	0,6	28,13	**210**						
11 ER 40	40,0	11	0,6	0,6	28,13	**212**						
11 ER 36	36,0	11	0,6	0,6	28,13	**214**						
11 ER 32	32,0	11	0,6	0,6	28,13	**216**						
11 ER 28	28,0	11	0,6	0,7	25,71	**218**						
11 ER 27	27,0	11	0,7	0,8	25,71	**220**						
11 ER 24	24,0	11	0,7	0,8	25,71	**222**						
11 ER 20	20,0	11	0,8	0,9	25,71	**224**						
11 ER 18	18,0	11	0,8	1,0	25,71	**226**						
11 ER 16	16,0	11	0,9	1,1	25,71	**228**						
11 ER 14	14,0	11	0,9	1,1	25,71	**230**						
16 ER 72	72,0	16	0,8	0,4	27,97	**232**						
16 ER 64	64,0	16	0,8	0,4	27,97	**234**						
16 ER 56	56,0	16	0,7	0,4	27,97	**236**						
16 ER 48	48,0	16	0,6	0,6	27,97	**238**						
16 ER 44	44,0	16	0,6	0,6	27,97	**240**						
16 ER 40	40,0	16	0,6	0,6	27,97	**242**						
16 ER 36	36,0	16	0,6	0,6	27,97	**244**						
16 ER 32	32,0	16	0,6	0,6	27,97	**246**			31,68	**746**		
16 ER 28	28,0	16	0,6	0,7	25,71	**248**			29,40	**748**		
16 ER 27	27,0	16	0,7	0,8	25,71	**250**						
16 ER 24	24,0	16	0,7	0,8	25,71	**252**	24,71	**152**	26,99	**752**		
16 ER 20	20,0	16	0,8	0,9	25,71	**254**	23,60	**154**	25,86	**754**	25,86	**954**
16 ER 18	18,0	16	0,8	1,0	25,71	**256**	24,71	**156**	26,99	**756**		
16 ER 16	16,0	16	0,9	1,1	25,71	**258**	23,60	**158**	25,86	**758**	25,86	**958**
16 ER 14	14,0	16	1,0	1,2	25,71	**260**	24,71	**160**	26,99	**760**		
16 ER 13	13,0	16	1,0	1,3	25,71	**262**						
16 ER 12	12,0	16	1,1	1,4	25,71	**264**	24,71	**164**	26,99	**764**		
16 ER 11,5	11,5	16	1,1	1,5	25,71	**266**						
16 ER 11	11,0	16	1,1	1,5	25,71	**268**	28,13	**168**				
16 ER 10	10,0	16	1,1	1,5	25,71	**270**						
16 ER 9	9,0	16	1,2	1,7	25,71	**272**						
16 ER 8	8,0	16	1,2	1,6	25,71	**274**						
16 ER 8	8,0	16	1,1	1,1							30,11	**974**
16 ER 8	8,0	16	1,1	1,5			28,13	**174**				
22 ER 7	7,0	22	1,6	2,3	40,22	**276**						
22 ER 6	6,0	22	1,6	2,3	40,22	**278**						
22 ER 5	5,0	22	1,7	2,5	40,22	**280**						
22 EN 4,5	4,5	22	2,0	11,0	42,76	**282** [1]						
22 EN 4	4,0	22	2,0	11,0	42,76	**284** [1]						

P	●	●	○	●
M	●	○	●	●
K	●	●	○	●
N		●	○	
S	○		○	●
H	○		○	○
O		○		

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

8

Left hand external thread turning insert

▲ Full profile

UN | UNC | UNF | UNEF | 60°

CCN20





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EL 71 266 ... EUR X3	
11 EL 72	72,0	11	0,8	0,4	32,94	202
11 EL 64	64,0	11	0,8	0,4	32,94	204
11 EL 56	56,0	11	0,7	0,4	32,94	206
11 EL 48	48,0	11	0,6	0,6	32,94	208
11 EL 44	44,0	11	0,6	0,6	32,94	210
11 EL 40	40,0	11	0,6	0,6	32,94	212
11 EL 36	36,0	11	0,6	0,6	32,94	214
11 EL 32	32,0	11	0,6	0,6	32,94	216
11 EL 28	28,0	11	0,6	0,7	32,94	218
11 EL 27	27,0	11	0,7	0,8	32,94	220
11 EL 24	24,0	11	0,7	0,8	32,94	222
11 EL 20	20,0	11	0,8	0,9	32,94	224
11 EL 18	18,0	11	0,8	1,0	32,94	226
11 EL 16	16,0	11	0,9	1,1	32,94	228
11 EL 14	14,0	11	0,9	1,1	32,94	230
16 EL 72	72,0	16	0,8	0,4	32,11	232
16 EL 64	64,0	16	0,8	0,4	32,11	234
16 EL 56	56,0	16	0,7	0,4	32,11	236
16 EL 48	48,0	16	0,6	0,6	32,11	238
16 EL 44	44,0	16	0,6	0,6	32,11	240
16 EL 40	40,0	16	0,6	0,6	32,11	242
16 EL 36	36,0	16	0,6	0,6	32,11	244
16 EL 32	32,0	16	0,6	0,6	32,11	246
16 EL 28	28,0	16	0,6	0,7	30,11	248
16 EL 27	27,0	16	0,7	0,8	30,11	250
16 EL 24	24,0	16	0,7	0,8	30,11	252
16 EL 20	20,0	16	0,8	0,9	30,11	254
16 EL 18	18,0	16	0,8	1,0	30,11	256
16 EL 16	16,0	16	0,9	1,1	30,11	258
16 EL 14	14,0	16	1,0	1,2	30,11	260
16 EL 13	13,0	16	1,0	1,3	30,11	262
16 EL 12	12,0	16	1,1	1,4	25,71	264
16 EL 11,5	11,5	16	1,1	1,5	34,38	266
16 EL 11	11,0	16	1,1	1,5	34,38	268
16 EL 10	10,0	16	1,1	1,5	34,38	270
16 EL 9	9,0	16	1,2	1,7	34,38	272
16 EL 8	8,0	16	1,2	1,6	34,38	274
22 EL 7	7,0	22	1,6	2,3	46,59	276
22 EL 6	6,0	22	1,6	2,3	46,59	278
22 EL 5	5,0	22	1,7	2,5	46,59	280

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand internal thread turning insert

▲ Full profile

UN | UNC | UNF | UNEF | 60°

CCN20 | HCN2525







Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IR 71 268 ... EUR X3		IR 71 268 ... EUR X3	
11 IR 72	72,0	11	0,8	0,3	28,13	**202**		
11 IR 64	64,0	11	0,8	0,4	28,13	**204**		
11 IR 56	56,0	11	0,7	0,4	28,13	**206**		
11 IR 48	48,0	11	0,6	0,6	28,13	**208**		
11 IR 44	44,0	11	0,6	0,6	28,13	**210**		
11 IR 40	40,0	11	0,6	0,6	28,13	**212**		
11 IR 36	36,0	11	0,6	0,6	28,13	**214**		
11 IR 32	32,0	11	0,6	0,6	28,13	**216**		
11 IR 28	28,0	11	0,6	0,7	25,71	**218**		
11 IR 27	27,0	11	0,7	0,8	25,71	**220**		
11 IR 24	24,0	11	0,7	0,8	25,71	**222**		
11 IR 20	20,0	11	0,8	0,9	25,71	**224**		
11 IR 18	18,0	11	0,8	1,0	25,71	**226**		
11 IR 16	16,0	11	0,9	1,1	25,71	**228**		
11 IR 14	14,0	11	1,0	1,1	25,71	**230**		
16 IR 72	72,0	16	0,8	0,3	27,97	**232**		
16 IR 64	64,0	16	0,8	0,4	27,97	**234**		
16 IR 56	56,0	16	0,7	0,4	27,97	**236**		
16 IR 48	48,0	16	0,6	0,6	27,97	**238**		
16 IR 44	44,0	16	0,6	0,6	27,97	**240**		
16 IR 40	40,0	16	0,6	0,6	27,97	**242**		
16 IR 36	36,0	16	0,6	0,6	27,97	**244**		
16 IR 32	32,0	16	0,6	0,6	27,97	**246**		
16 IR 28	28,0	16	0,6	0,7	25,71	**248**		
16 IR 27	27,0	16	0,7	0,8	25,71	**250**		
16 IR 24	24,0	16	0,7	0,8	25,71	**252**		
16 IR 20	20,0	16	0,8	0,9	25,71	**254**		
16 IR 18	18,0	16	0,8	1,0	25,71	**256**		
16 IR 16	16,0	16	0,9	1,1	25,71	**258**		
16 IR 14	14,0	16	1,0	1,2	25,71	**260**	30,11	**760**
16 IR 13	13,0	16	1,0	1,3	25,71	**262**		
16 IR 12	12,0	16	1,1	1,4	25,71	**264**	26,99	**764**
16 IR 11,5	11,5	16	1,1	1,5	25,71	**266**		
16 IR 11	11,0	16	1,1	1,5	25,71	**268**		
16 IR 10	10,0	16	1,1	1,5	25,71	**270**		
16 IR 9	9,0	16	1,2	1,7	25,71	**272**		
16 IR 8	8,0	16	1,2	1,6	25,71	**274**		
16 IR 8	8,0	16	1,1	1,5			30,11	**774**
22 IR 7	7,0	22	1,6	2,3	40,22	**276**	43,19	**776**
22 IR 6	6,0	22	1,6	2,3	40,22	**278**		
22 IR 5	5,0	22	1,7	2,5	40,22	**280**		
22 IN 4,5	4,5	22	2,0	11,0	42,76	**282** [1)]		
22 IN 4	4,0	22	2,0	11,0	42,76	**284** [1)]		

P	●	○
M	●	●
K	●	○
N		○
S	○	○
H	○	○
O		

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

8

Left hand internal thread turning insert

▲ Full profile

UN | UNC | UNF | UNEF | 60°

CCN20





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IL 71 270 ... EUR X3	
11 IL 72	72,0	11	0,8	0,3	32,94	**202**
11 IL 64	64,0	11	0,8	0,4	32,94	**204**
11 IL 56	56,0	11	0,7	0,4	32,94	**206**
11 IL 48	48,0	11	0,6	0,6	32,94	**208**
11 IL 44	44,0	11	0,6	0,6	32,94	**210**
11 IL 40	40,0	11	0,6	0,6	32,94	**212**
11 IL 36	36,0	11	0,6	0,6	32,94	**214**
11 IL 32	32,0	11	0,6	0,6	32,94	**216**
11 IL 28	28,0	11	0,6	0,7	32,94	**218**
11 IL 27	27,0	11	0,7	0,8	32,94	**220**
11 IL 24	24,0	11	0,7	0,8	32,94	**222**
11 IL 20	20,0	11	0,8	0,9	32,94	**224**
11 IL 18	18,0	11	0,8	1,0	32,94	**226**
11 IL 16	16,0	11	0,9	1,1	32,94	**228**
11 IL 14	14,0	11	0,9	1,1	32,94	**230**
16 IL 72	72,0	16	0,8	0,3	32,94	**232**
16 IL 64	64,0	16	0,8	0,4	32,94	**234**
16 IL 56	56,0	16	0,7	0,4	32,94	**236**
16 IL 48	48,0	16	0,6	0,6	32,94	**238**
16 IL 44	44,0	16	0,6	0,6	32,94	**240**
16 IL 40	40,0	16	0,6	0,6	32,94	**242**
16 IL 36	36,0	16	0,6	0,6	32,94	**244**
16 IL 32	32,0	16	0,6	0,6	32,94	**246**
16 IL 28	28,0	16	0,6	0,7	32,94	**248**
16 IL 27	27,0	16	0,7	0,8	32,94	**250**
16 IL 24	24,0	16	0,7	0,8	32,94	**252**
16 IL 20	20,0	16	0,8	0,9	32,94	**254**
16 IL 18	18,0	16	0,8	1,0	32,94	**256**
16 IL 16	16,0	16	0,9	1,1	32,94	**258**
16 IL 14	14,0	16	1,0	1,2	32,94	**260**
16 IL 13	13,0	16	1,0	1,3	32,94	**262**
16 IL 12	12,0	16	1,1	1,4	32,94	**264**
16 IL 11,5	11,5	16	1,1	1,5	32,94	**266**
16 IL 11	11,0	16	1,1	1,5	32,94	**268**
16 IL 10	10,0	16	1,1	1,5	32,94	**270**
16 IL 9	9,0	16	1,2	1,7	32,94	**272**
16 IL 8	8,0	16	1,2	1,6	32,94	**274**
22 IL 7	7,0	22	1,6	2,3	32,94	**276**
22 IL 6	6,0	22	1,6	2,3	32,94	**278**
22 IL 5	5,0	22	1,7	2,5	32,94	**280**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand external thread turning insert

▲ Full profile

NPT 60°



CCN20 | CWN1525 | HCN2525





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	ER 71 256 ... EUR X3		ER 71 256 ... EUR X3		ER 71 256 ... EUR X3	
16 ER 27	27,0	16	0,7	0,8	28,84	**240**				
16 ER 18	18,0	16	0,8	1,0	28,84	**242**			32,55	**742**
16 ER 14	14,0	16	0,9	1,2	28,84	**244**	27,42	**144**	29,84	**744**
16 ER 11,5	11,5	16	1,1	1,5	28,84	**246**	29,69	**146**	32,55	**746**
16 ER 8	8,0	16	1,3	1,8	28,84	**248**				
P					●		●		○	
M					●		○		●	
K					●		●		○	
N							●		○	
S					○				○	
H					○				○	
O							○			

→ v_c Page 45

8

Left hand external thread turning insert

▲ Full profile

NPT 60°



CCN20



Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EL 71 258 ... EUR X3	
16 EL 27	27,0	16	0,7	0,8	33,54	**240**
16 EL 18	18,0	16	0,8	1,0	33,54	**242**
16 EL 14	14,0	16	0,9	1,2	33,54	**244**
16 EL 11,5	11,5	16	1,1	1,5	33,54	**246**
16 EL 8	8,0	16	1,3	1,8	33,54	**248**
P					●	
M					●	
K					●	
N						
S					○	
H					○	
O						

→ v_c Page 45

Right hand internal thread turning insert

▲ Full profile
▲ CCN7525 grade with sintered chip breaker for universal application

NPT 60°



CCN20 CCN7525



Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IR 71 260 ... EUR X3		IR 71 260 ... EUR X3	
11 IR 27	27,0	11	0,7	0,8	28,84	**210**		
11 IR 18	18,0	11	0,8	1,0	28,84	**212**		
11 IR 14	14,0	11	0,9	1,1	28,84	**214**		
16 IR 27	27,0	16	0,7	0,8	28,84	**240**		
16 IR 18	18,0	16	0,8	1,0	28,84	**242**		
16 IR 14	14,0	16	0,9	1,2	28,84	**244**	34,38	**944**
16 IR 11,5	11,5	16	1,1	1,5	28,84	**246**	34,81	**946**
16 IR 8	8,0	16	1,3	1,8	28,84	**248**		
P					●		●	
M					●		●	
K					●		●	
N								
S					○		●	
H					○		○	
O								

→ v_c Page 45

Left hand internal thread turning insert

▲ Full profile

NPT 60°



CCN20



Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IL 71 262 ... EUR X3	
11 IL 27	27,0	11	0,7	0,8	33,54	**210**
11 IL 18	18,0	11	0,8	1,0	33,54	**212**
11 IL 14	14,0	11	0,9	1,1	33,54	**214**
16 IL 27	27,0	16	0,7	0,8	33,54	**240**
16 IL 18	18,0	16	0,8	1,0	33,54	**242**
16 IL 14	14,0	16	0,9	1,2	33,54	**244**
16 IL 11,5	11,5	16	1,1	1,5	33,54	**246**
16 IL 8	8,0	16	1,3	1,8	33,54	**248**
P					●	
M					●	
K					●	
N						
S					○	
H					○	
O						

→ v_c Page 45

Right hand external thread turning insert

▲ Full profile
▲ Trapezoidal thread DIN 103





CCN20



CWN1525



Designation	TP mm	INSL mm	PDX mm	PDY mm	ER 71 232 ... EUR X3		ER 71 232 ... EUR X3	
16 ER 1,5	1,5	16	1,0	1,1	31,12	**240**		
16 ER 2,0	2,0	16	1,1	1,3	31,12	**242**		
16 ER 2,0	2,0	16	1,0	1,3			29,27	**142**
16 ER 3,0	3,0	16	1,3	1,5	31,12	**244**	27,85	**144**
22 ER 4,0	4,0	22	1,8	1,9			39,76	**170**
22 ER 4,0	4,0	22	1,7	1,9	42,91	**270**		
22 ER 5,0	5,0	22	2,0	2,4			43,76	**172**
22 ER 5,0	5,0	22	2,1	2,5	44,74	**272**		
22 ER 6,0	6,0	22	2,3	2,7	46,59	**274** [1]		
22 EN 6,0	6,0	22	2,0	11,0	46,59	**276** [2]		
22 EN 7,0	7,0	22	2,3	11,0	48,45	**278** [2]		
P					●		●	
M					●		○	
K					●		●	
N							●	
S					○			
H					○			
O							○	

8

1) Requires special holder or an independently modified standard holder

2) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

Left hand external thread turning insert

▲ Full profile
▲ Trapezoidal thread DIN 103



CCN20





Designation	TP	INSL	PDX	PDY	EL 71 234 ... EUR X3	
	mm	mm	mm	mm		
16 EL 1,5	1,5	16	1,0	1,1	36,09	**240**
16 EL 2,0	2,0	16	1,1	1,3	36,09	**242**
16 EL 3,0	3,0	16	1,3	1,5	36,09	**244**
22 EL 4,0	4,0	22	1,7	1,9	50,28	**270**
22 EL 5,0	5,0	22	2,1	2,5	52,56	**272**
22 EL 6,0	6,0	22	2,3	2,7	54,69	**274** 1)

P	●
M	●
K	●
N	
S	○
H	○
O	

1) Requires special holder or an independently modified standard holder

→ v_c Page 45

Right hand internal thread turning insert

▲ Full profile
▲ Trapezoidal thread DIN 103



CCN20 CWN1525







Designation	TP	INSL	PDX	PDY	IR 71 236 ... EUR X3		IR 71 236 ... EUR X3	
	mm	mm	mm	mm				
11 IR 1,5	1,5	11	0,815	0,9	30,82	**210**		
16 IR 1,5	1,5	16	1,000	1,1	30,82	**240**		
16 IR 2,0	2,0	16	1,100	1,3	30,82	**242**		
16 IR 3,0	3,0	16	1,300	1,5	30,82	**244**	31,84	**144**
22 IR 4,0	4,0	22	1,800	1,9			41,91	**170**
22 IR 4,0	4,0	22	1,700	1,9	42,91	**270**		
22 IR 5,0	5,0	22	2,000	2,4			43,46	**172**
22 IR 5,0	5,0	22	2,100	2,5	44,74	**272**		
22 IR 6,0	6,0	22	2,300	2,7	46,59	**274** 1)		
22 IN 6,0	6,0	22	2,000	11,0	46,59	**276** 2)		
22 IN 7,0	7,0	22	2,300	11,0	48,45	**278** 2)		

P	●	●
M	●	○
K	●	●
N		●
S	○	
H	○	
O		○

1) Requires special holder or an independently modified standard holder
2) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

Left hand internal thread turning insert

▲ Full profile
▲ Trapezoidal thread DIN 103



CCN20





Designation	TP mm	INSL mm	PDX mm	PDY mm	IL 71 238 ... EUR X3	
11 IL 1,5	1,5	11	0,8	0,9	36,09	**210**
16 IL 1,5	1,5	16	1,0	1,1	36,09	**240**
16 IL 2,0	2,0	16	1,1	1,3	36,09	**242**
16 IL 3,0	3,0	16	1,3	1,5	36,09	**244**
22 IL 4,0	4,0	22	1,7	1,9	50,28	**270**
22 IL 5,0	5,0	22	2,1	2,5	50,28	**272**
22 IL 6,0	6,0	22	2,3	2,7	52,56	**274** 1)

P	●
M	●
K	●
N	
S	○
H	○
O	

1) Requires special holder or an independently modified standard holder

→ v_c Page 45

8

Right hand external thread turning insert

▲ Full profile
▲ Round thread DIN 405



CCN20





ER
71 248 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
16 ER 10	10	16	1,1	1,2	30,82	**240**
16 ER 8	8	16	1,4	1,3	30,82	**242**
16 ER 6	6	16	1,5	1,7	30,82	**246**
22 ER 6	6	22	1,5	1,7	43,05	**270**
22 ER 4	4	22	2,2	2,3	46,59	**272**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Left hand external thread turning insert

▲ Full profile
▲ Round thread DIN 405



CCN20





EL
71 250 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
16 EL 10	10	16	1,1	1,2	35,96	**240**
16 EL 8	8	16	1,4	1,3	35,96	**242**
16 EL 6	6	16	1,5	1,7	35,96	**246**
22 EL 6	6	22	1,5	1,7	50,43	**270**
22 EL 4	4	22	2,2	2,3	54,69	**272**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand internal thread turning insert

▲ Full profile
▲ Round thread DIN 405

Rd | 30°

CCN20





IR
71 252 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
16 IR 10	10	16	1,1	1,2	30,82	**240**
16 IR 8	8	16	1,4	1,4	30,82	**242**
16 IR 6	6	16	1,4	1,5	30,82	**246**
22 IR 6	6	22	1,5	1,7	43,05	**270**
22 IR 4	4	22	2,2	2,3	46,59	**272**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Left hand internal thread turning insert

▲ Full profile
▲ Round thread DIN 405

Rd | 30°

CCN20





IL
71 254 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
16 IL 10	10	16	1,1	1,2	28,84	**240**
16 IL 8	8	16	1,4	1,4	28,84	**242**
16 IL 6	6	16	1,4	1,5	28,84	**246**
22 IL 6	6	22	1,5	1,7	40,48	**270**
22 IL 4	4	22	2,2	2,3	43,63	**272**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand external thread turning insert

▲ Full profile
▲ Conduit thread DIN 40430

Pg | 80°

CCN20





ER
71 240 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
16 ER 20	20	16	0,8	0,8	30,82	**240**
16 ER 18	18	16	0,8	0,9	30,82	**242**
16 ER 16	16	16	0,8	1,0	30,82	**244**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Left hand external thread turning insert

▲ Full profile
▲ Conduit thread DIN 40430

Pg | 80°

CCN20





EL
71 242 ...

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	EUR X3	
16 EL 20	20	16	0,8	0,8	33,96	**240**
16 EL 18	18	16	0,8	0,9	33,96	**242**
16 EL 16	16	16	0,8	1,0	33,96	**244**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand internal thread turning insert

▲ Full profile
▲ Conduit thread DIN 40430

Pg | 80°

CCN20





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IR 71 244 ... EUR X3	
11 IR 18	18	11	0,8	0,9	30,82	**238**
16 IR 18	18	16	0,8	0,9	30,82	**242**
16 IR 16	16	16	0,8	1,0	30,82	**244**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Left hand internal thread turning insert

▲ Full profile
▲ Conduit thread DIN 40430

Pg | 80°

CCN20





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IL 71 246 ... EUR X3	
11 IL 18	18	11	0,8	0,9	33,96	**238**
16 IL 18	18	16	0,8	0,9	33,96	**242**
16 IL 16	16	16	0,8	1,0	33,96	**244**

P	●
M	●
K	●
N	
S	○
H	○
O	

→ v_c Page 45

Right hand external thread turning insert

▲ Partial profile
▲ CCN7525 grade with sintered chip breaker for universal application



CCN20 | CWN1525 | HCN2525 | CCN7525






Designation	TP	INSL	PDX	PDY	ER 71 206 ... EUR X3		ER 71 206 ... EUR X3		ER 71 206 ... EUR X3		ER 71 206 ... EUR X3	
	mm	mm	mm	mm								
16 ER A60	0,5 - 1,5	16	0,8	0,9	23,88	**240**	21,32	**140**	23,60	**740**	23,60	**940**
16 ER AG60	0,5 - 3	16	1,2	1,7	24,59	**244**	20,45	**144**	22,58	**744**	22,58	**944**
16 ER G60	1,75 - 3	16	1,2	1,7	24,59	**242**	23,16	**142**	25,16	**742**	25,16	**942**
22 EN U60	5,5 - 8	22	0,9	11,0	38,35	**272** [1)]						
22 ER N60	3,5 - 5	22	1,7	2,5	38,35	**270**	39,34	**170**				
P					●		●		○		●	
M					●		○		●		●	
K					●		●		○		●	
N							●		○			
S					○				○		●	
H					○				○		○	
O							○					

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

Left hand external thread turning insert

▲ Partial profile



CCN20



Designation	TP	INSL	PDX	PDY	EL 71 208 ... EUR X3	
	mm	mm	mm	mm		
16 EL A60	0,5 - 1,5	16	0,8	0,9	26,16	**240**
16 EL AG60	0,5 - 3	16	1,2	1,7	27,57	**244**
16 EL G60	1,75 - 3	16	1,2	1,7	27,57	**242**
22 EL N60	3,5 - 5	22	1,7	2,5	44,74	**270**
P					●	
M					●	
K					●	
N						
S					○	
H					○	
O						

→ v_c Page 45

Right hand internal thread turning insert

▲ Partial profile
▲ CCN7525 grade with sintered chip breaker for universal application



CCN20 | CWN1525 | HCN2525 | CCN7525



Designation	TP mm	INSL mm	PDX mm	PDY mm	IR 71 210 ... EUR X3		IR 71 210 ... EUR X3		IR 71 210 ... EUR X3		IR 71 210 ... EUR X3	
11 IR A60	0,5 - 1,5	11	0,8	0,9	23,88	**210**	21,75	**110**				
16 IR A60	0,5 - 1,5	16	0,8	0,9	23,88	**240**	26,30	**140**				
16 IR AG60	0,5 - 3	16	1,2	1,7	24,59	**244**	21,75	**144**	23,88	**744**	23,88	**944**
16 IR G60	1,75 - 3	16	1,2	1,7	24,59	**242**	23,16	**142**				
22 IN U60	5,5 - 8	22	0,9	11,0	38,35	**272** [1)]						
22 IR N60	3,5 - 5	22	1,7	2,5	38,35	**270**	37,09	**170**				
P					●		●		○		●	
M					●		○		●		●	
K					●		●		○		●	
N							●		○			
S					○				○		●	
H					○				○		○	
O							○					

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

8

Left hand internal thread turning insert

▲ Partial profile



CCN20



Designation	TP mm	INSL mm	PDX mm	PDY mm	IL 71 212 ... EUR X3	
11 IL A60	0,5 - 1,5	11	0,8	0,9	26,16	**210**
16 IL A60	0,5 - 1,5	16	0,8	0,9	26,16	**240**
16 IL AG60	0,5 - 3	16	1,2	1,7	27,57	**244**
16 IL G60	1,75 - 3	16	1,2	1,7	27,57	**242**
22 IL N60	3,5 - 5	22	1,7	2,5	44,74	**270**
P						●
M						●
K						●
N						
S						○
H						○
O						

→ v_c Page 45

Right hand external thread turning insert

▲ Partial profile
▲ CCN7525 grade with sintered chip breaker for universal application



CCN20 | CWN1525 | HCN2525 | CCN7525






Designation	TPI	INSL	PDX	PDY	ER 71 200 ... EUR X3		ER 71 200 ... EUR X3		ER 71 200 ... EUR X3		ER 71 200 ... EUR X3	
	1/"	mm	mm	mm								
16 ER A55	48 - 16	16	0,8	0,9	24,99	**240**	25,58	**140**	27,27	**740**	27,27	**940**
16 ER AG55	48 - 8	16	1,2	1,7	26,71	**244**	23,16	**144**	25,16	**744**	25,16	**944**
16 ER G55	14 - 8	16	1,2	1,7	26,71	**242**	25,58	**142**	27,69	**742**	27,69	**942**
22 ER N55	7 - 5	22	1,7	2,5	41,63	**270**	41,91	**170**	45,58	**770**		
22 EN U55	4,5 - 3,25	22	0,9	11,0	41,63	**272** [1]						
P					●		●		○		●	
M					●		○		●		●	
K					●		●		○		●	
N							●		○			
S					○				○		●	
H					○				○		○	
O							○					

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

Left hand external thread turning insert

▲ Partial profile



CCN20



Designation	TPI	INSL	PDX	PDY	EL 71 202 ... EUR X3	
	1/"	mm	mm	mm		
16 EL A55	48 - 16	16	0,8	0,9	28,69	**240**
16 EL AG55	48 - 8	16	1,2	1,7	31,12	**244**
16 EL G55	14 - 8	16	1,2	1,7	31,12	**242**
22 EL N55	7 - 5	22	1,7	2,5	48,59	**270**
P					●	
M					●	
K					●	
N						
S					○	
H					○	
O						

→ v_c Page 45

Right hand internal thread turning insert

▲ Partial profile
▲ CCN7525 grade with sintered chip breaker for universal application



CCN20 | CWN1525 | CCN7525





Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IR 71 204 ... EUR X3		IR 71 204 ... EUR X3		IR 71 204 ... EUR X3	
11 IR A55	48 - 16	11	0,8	0,9	24,99	**210**				
16 IR A55	48 - 16	16	0,8	0,9	24,99	**240**				
16 IR AG55	48 - 8	16	1,2	1,7	26,71	**244**				
16 IR G55	14 - 8	16	1,2	1,7	26,71	**242**	25,58	**142**	27,69	**942**
22 IN U55	4,5 - 3,25	22	0,9	11,0	41,63	**272** [1)]				
22 IR N55	7 - 5	22	1,7	2,5	41,63	**270**				
P					●		●		●	
M					●		○		●	
K					●		●		●	
N							●			
S					○				●	
H					○				○	
O							○			

1) Neutral version (N) – for right and left hand thread applications. Neutral Toolholder marked (U) is required.

→ v_c Page 45

8

Left hand internal thread turning insert

▲ Partial profile



CCN20



Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IL 71 203 ... EUR X3	
11 IL A55	48 - 16	11	0,8	0,9	28,69	**210**
16 IL A55	48 - 16	16	0,8	0,9	28,69	**240**
16 IL AG55	48 - 8	16	1,2	1,7	31,12	**244**
16 IL G55	14 - 8	16	1,2	1,7	31,12	**242**
22 IL N55	7 - 5	22	1,7	2,5	48,59	**270**
P					●	
M					●	
K					●	
N						
S					○	
H					○	
O						

→ v_c Page 45

Standard External Thread Turning Holder

▲ Tool Holder with Approach Angle ß = 1,5°





Illustrations show right-hand versions

ISO designation	HF mm	WF mm	LF mm	LH mm	Insert	torque moment Nm	Left-hand 71 281 ... EUR Y2		Right-hand 71 280 ... EUR Y2	
SE R/L 08 08 H11	8	11	100	16	11 ..	1,3	86,11	**908** [2]	86,11	**908** [2]
SE R/L 10 10 H11	10	12	100	18	11 ..	1,3	91,80	**910** [2]	91,80	**910** [2]
SE R/L 12 12 K11	12	12	125	20	11 ..	1,3	96,54	**912** [2]	96,54	**912** [2]
SE R/L 12 12 F16	12	16	80	22	16 ..	3,5	100,60	**012**	100,60	**012**
SE R/L 16 16 H16	16	16	100	25	16 ..	3,5	123,80	**016**	123,80	**016**
SE R/L 20 20 K16	20	20	125	30	16 ..	3,5	123,80	**020**	123,80	**020**
SE R/L 25 25 M16	25	25	150	30	16 ..	3,5	142,00	**025**	142,00	**025**
SE R/L 32 32 P16	32	32	170	30	16 ..	3,5	155,50	**032**	155,50	**032**
SE R/L 25 25 M22	25	25	150	32	22 ..	10	155,50	**125**	155,50	**125**
SE R 32 32 P22	32	32	170	34	22 ..	10			162,40	**132**
SE R 32 32 P22U	32	21	170	32	22 .N	10			162,40	**232** [1]

1) Neutral insert indicated by marking (N)
2) without shim

Multi tooth shim

Shim

Screw-U

Key D

Clamping screw

Spare parts for Article no.		71 950 ... EUR Y2			71 950 ... EUR Y2		71 950 ... EUR Y2			80 950 ... EUR Y7		71 950 ... EUR Y2	
71 280 908 / 71 281 908									T08	10,05	**110**	1,41	**230**
71 280 910 / 71 281 910									T08	10,05	**110**	1,41	**230**
71 280 912 / 71 281 912									T08	10,05	**110**	1,41	**230**
71 280 012	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 281 012	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 280 016	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 281 016	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 280 020	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 281 020	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 280 025	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 281 025	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 280 032	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 281 032	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 280 125				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 281 125				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 280 132				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 280 232				ER 22U / IL 22U	17,63	**153**	2,13	**235**	T20	12,83	**114**	2,13	**232**

Shims for correction of helix angle see page → **Page 43.**

External threading holder

▲ Tool Holder with Approach Angle ß = 1,5°



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	Insert	torque moment Nm	Left-hand 84 191 ... EUR Y8		Right-hand 84 190 ... EUR Y8	
PSC40 SE R/L 27050-16.IK	PSC 40	50	27	16 ..	3,5	308,20	**412**	308,20	**412**
PSC40 SE R/L 27050-22.IK	PSC 40	50	27	22 ..	10	308,20	**422**	308,20	**422**
PSC50 SE R/L 35060-16.IK	PSC 50	60	35	16 ..	3,5	340,70	**512**	340,70	**512**
PSC50 SE R/L 35060-22.IK	PSC 50	60	35	22 ..	10	340,70	**522**	340,70	**522**
PSC63 SE R/L 45065-16.IK	PSC 63	65	45	16 ..	3,5	390,70	**612**	390,70	**612**
PSC63 SE R/L 45065-22.IK	PSC 63	65	45	22 ..	10	390,70	**622**	390,70	**622**
PSC80 SE R/L 55080-22.IK	PSC 80	80	55	22 ..	10	412,30	**822**	412,30	**822**

Multi tooth shim

Shim

Screw-U

Key D

Clamping screw

Spare parts for Article no.		71 950 ... EUR Y2			71 950 ... EUR Y2		71 950 ... EUR Y2			80 950 ... EUR Y7		71 950 ... EUR Y2	
84 190 412	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
84 191 412	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
84 190 422				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 191 422				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 190 512	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
84 191 512	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
84 190 522				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 191 522				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 190 612	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
84 191 612	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
84 190 622				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 191 622				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 190 822				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
84 191 822				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**

Shims for correction of helix angle see page → **Page 43.**

Standard Internal Thread Turning Holder

▲ Tool Holder with Approach Angle ß = 1,5°

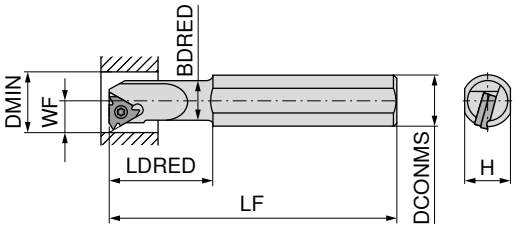

Illustrations show right-hand versions

ISO designation	H mm	LF mm	LDRED mm	DCONMS mm	BDRED mm	WF mm	DMIN mm	Insert	torque moment Nm	Left-hand 71 283 ... EUR Y2		Right-hand 71 282 ... EUR Y2	
SI R 0010 H11	9,0	100	25	10	9,5	7,4	12	11 ..	1,3			142,00	**011** [1]
SI R/L 0010 K11	14,0	125	25	16	10,0	7,4	12	11 ..	1,3	108,40	**010** [1]	108,40	**010** [1]
SI R 0013 L11	14,0	140	32	16	12,0	8,9	15	11 ..	1,3			116,10	**013** [1]
SI R/L 0013 M16	14,0	150	32	16	13,0	10,2	16	16 ..	3,5	118,20	**015** [1]	118,20	**015** [1]
SI R/L 0016 P16	18,0	170	40	20	15,0	11,7	19	16 ..	3,5	118,20	**016** [1]	118,20	**016** [1]
SI R/L 0020 P16	18,0	170	40	20	19,5	13,7	24	16 ..	3,5	139,30	**020**	139,30	**020**
SI R 0025 R16	22,6	200	40	25	24,5	16,2	29	16 ..	3,5			169,00	**026**
SI R/L 0032 S16	28,8	250	50	32	31,5	19,7	36	16 ..	3,5	182,60	**032**	182,60	**032**
SI R 0040 T16	36,0	300	50	40	39,5	23,7	44	16 ..	3,5			270,40	**040**
SI R 0020 P22	18,0	170	40	20	19,5	15,6	24	22 ..	10			131,70	**120** [1]
SI R/L 0025 R22	22,6	200	40	25	24,5	18,1	29	22 ..	10	169,00	**126**	169,00	**126**
SI R 0032 S22	28,8	250	50	32	31,5	21,6	38	22 ..	10			187,90	**132**
SI R 0040 T22	36,0	300	60	40	39,5	25,6	46	22 ..	10			277,30	**140**
SI R 0032 S22U	28,8	250	60	32	31,5	24,4	38	22 .N	10			158,20	**133** [2]

1) without shim
2) Neutral insert indicated by marking (N)

Multi tooth shim

Shim

Screw-U

Key D

Clamping screw

Spare parts for Article no.		71 950 ... EUR Y2			71 950 ... EUR Y2		71 950 ... EUR Y2			80 950 ... EUR Y7		71 950 ... EUR Y2	
71 282 011									T08	10,05	**110**	1,41	**230**
71 282 010 / 71 283 010									T08	10,05	**110**	1,41	**230**
71 282 013									T08	10,05	**110**	1,41	**230**
71 282 015 / 71 283 015									T10	11,78	**112**	2,12	**236**
71 282 016 / 71 283 016									T10	11,78	**112**	2,12	**236**
71 282 020	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 283 020	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 282 026	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 282 032	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 283 032	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 282 040	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 282 120							1,41	**234**	T20	12,83	**114**	2,13	**237**
71 282 126				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 283 126				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 282 132				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 282 140				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**
71 282 133				AL 22U / IR 22U	17,63	**161**	2,13	**235**	T20	12,83	**114**	2,13	**232**

Shims for correction of helix angle see page → **Page 43.**

Standard Internal Thread Turning Holder with thro' coolant

▲ Tool Holder with Approach Angle ß = 1,5°

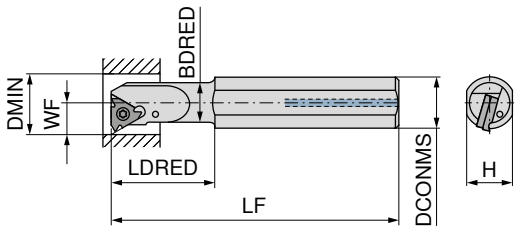

Illustrations show right-hand versions

ISO designation	H mm	LF mm	LDRED mm	DCONMS mm	BDRED mm	WF mm	DMIN mm	Insert	torque moment Nm	Left-hand 71 283 ... EUR Y2		Right-hand 71 282 ... EUR Y2	
SI R 0010 M11CB	9,0	150	25	10	9,5	7,4	12	11 ..	1,3			452,00	**510** 2)
SI R 0012 P11CB	11,0	170	30	12	11,5	8,4	15	11 ..	1,3			480,90	**512** 2)
SI R/L 0010 K11B	14,0	125	25	16	10,0	7,4	12	11 ..	1,3	129,90	**310**	129,90	**310**
SI R/L 0013 M16B	14,0	150	32	16	13,0	10,2	16	16 ..	3,5	142,00	**315**	142,00	**315**
SI R 0016 P16B	18,0	170	40	20	16,0	11,7	19	16 ..	3,5			142,00	**316**
SI R 0020 P16B	18,0	170	40	20	19,5	13,7	24	16 ..	3,5			166,20	**320** 1)
SI R/L 0032 S16B	28,8	250	50	32	31,5	19,7	36	16 ..	3,5	205,50	**332** 1)	205,50	**332** 1)

1) with shim seat
2) Carbide version

Multi tooth shim

Shim

Screw-U

Key D

Clamping screw

Spare parts for Article no.		71 950 ... EUR Y2			71 950 ... EUR Y2		71 950 ... EUR Y2			80 950 ... EUR Y7		71 950 ... EUR Y2	
71 282 510									T08	10,05	**110**	1,41	**230**
71 282 512									T08	10,05	**110**	1,41	**230**
71 282 310 / 71 283 310									T08	10,05	**110**	1,41	**230**
71 282 315 / 71 283 315									T10	11,78	**112**	2,12	**236**
71 282 316									T10	11,78	**112**	2,12	**236**
71 282 320	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 282 332	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
71 283 332	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**

Shims for correction of helix angle see page → **Page 43.**



Do you already know our MaxiChange exchangeable head system?

Use our thread turning inserts with the MaxiChange exchangeable head system.

Further information and products can be found in the → Chapter 9 – Turning Tools

Internal threading holder

▲ Tool Holder with Approach Angle ß = 1,5°



Illustrations show right-hand versions

ISO designation	Adapter	WF mm	LPR mm	LH mm	DMIN mm	Insert	torque moment Nm	Left-hand 84 197 ... EUR Y8		Right-hand 84 196 ... EUR Y8	
PSC40 SI R/L 12060-16.IK	PSC 40	12	60	37	20	16 ..	3,5	431,20	**410**	431,20	**410**
PSC40 SI R/L 14060-16.IK	PSC 40	14	60	38	25	16 ..	3,5	431,20	**412**	431,20	**412**
PSC40 SI R/L 17070-16.IK	PSC 40	17	70	48	32	16 ..	3,5	431,20	**414**	431,20	**414**
PSC40 SI R/L 22090-16.IK	PSC 40	22	90	69	40	16 ..	3,5	431,20	**416**	431,20	**416**
PSC40 SI R/L 27080-16.IK	PSC 40	27	80	60	50	16 ..	3,5	431,20	**418**	431,20	**418**
PSC40 SI R/L 15065-22.IK	PSC 40	15	65	42	25	22 ..	10	431,20	**420**	431,20	**420**
PSC40 SI R/L 19070-22.IK	PSC 40	19	70	48	32	22 ..	10	431,20	**422**	431,20	**422**
PSC40 SI R/L 22090-22.IK	PSC 40	22	90	69	40	22 ..	10	431,20	**424**	431,20	**424**
PSC40 SI R/L 27080-22.IK	PSC 40	27	80	60	50	22 ..	10	431,20	**426**	431,20	**426**
PSC50 SI R/L 12060-16.IK	PSC 50	12	60	35	20	16 ..	3,5	480,00	**510**	480,00	**510**
PSC50 SI R/L 14060-16.IK	PSC 50	14	60	36	25	16 ..	3,5	480,00	**512**	480,00	**512**
PSC50 SI R/L 17070-16.IK	PSC 50	17	70	47	32	16 ..	3,5	480,00	**514**	480,00	**514**
PSC50 SI R/L 22090-16.IK	PSC 50	22	90	68	40	16 ..	3,5	480,00	**516**	480,00	**516**
PSC50 SI R/L 27105-16.IK	PSC 50	27	105	84	50	16 ..	3,5	480,00	**518**	480,00	**518**
PSC50 SI R/L 15065-22.IK	PSC 50	15	65	41	25	22 ..	10	480,00	**520**	480,00	**520**
PSC50 SI R/L 19070-22.IK	PSC 50	19	70	47	32	22 ..	10	480,00	**522**	480,00	**522**
PSC50 SI R/L 22090-22.IK	PSC 50	22	90	68	40	22 ..	10	480,00	**524**	480,00	**524**
PSC50 SI R/L 27105-22.IK	PSC 50	27	105	84	50	22 ..	10	480,00	**526**	480,00	**526**
PSC63 SI R/L 14070-16.IK	PSC 63	14	70	42	25	16 ..	3,5	551,60	**610**	551,60	**610**
PSC63 SI R/L 17075-16.IK	PSC 63	17	75	48	32	16 ..	3,5	551,60	**612**	551,60	**612**
PSC63 SI R/L 22090-16.IK	PSC 63	22	90	64	40	16 ..	3,5	551,60	**614**	551,60	**614**
PSC63 SI R/L 27105-16.IK	PSC 63	27	105	80	50	16 ..	3,5	551,60	**616**	551,60	**616**
PSC63 SI R/L 19075-22.IK	PSC 63	19	75	48	32	22 ..	10	551,60	**620**	551,60	**620**
PSC63 SI R/L 22090-22.IK	PSC 63	22	90	64	40	22 ..	10	551,60	**622**	551,60	**622**
PSC63 SI R/L 27105-22.IK	PSC 63	27	105	80	50	22 ..	10	551,60	**624**	551,60	**624**

Multi tooth shim

Shim

Screw-U

Key D

Clamping screw

Spare parts Insert			71 950 ... EUR Y2		71 950 ... EUR Y2		71 950 ... EUR Y2		80 950 ... EUR Y7		71 950 ... EUR Y2	
16 ..	right	EL 16 / IR 16	16,39	**108**	EL 16 / IR 16	11,07	**129**	1,41	**234**	T10	11,78	**112**	1,41	**231**
16 ..	left	ER 16 / IL 16	16,39	**101**	ER 16 / IL 16	12,16	**121**	1,41	**234**	T10	11,78	**112**	1,41	**231**
22 ..	left				ER 22 / IL 22	17,63	**137**	2,13	**235**	T20	12,83	**114**	2,13	**232**
22 ..	right				EL 22 / IR 22	17,63	**145**	2,13	**235**	T20	12,83	**114**	2,13	**232**

Shims for correction of helix angle see page → **Page 43.**



Do you already know our MaxiChange exchangeable head system?

Use our thread turning inserts with the MaxiChange exchangeable head system.

Further information and products can be found in the → Chapter 9 – Turning Tools

Right hand internal thread turning insert – Mini size 06

▲ Full profile
▲ Thread production from diameter 6 mm





CCN1525 CCN2520

Designation	TP mm	PDX mm	PDY mm	INSL mm	IR 71 271 ... EUR X3		IR 71 224 ... EUR X3	
06 IR 0,5	0,50	0,9	0,5	6	29,40	**110**	31,68	**35700**
06 IR 0,75	0,75	0,8	0,5	6	29,40	**112**	31,68	**36100**
06 IR 1,0	1,00	0,7	0,6	6	29,40	**114**	31,68	**36500**
06 IR 1,25	1,25	0,6	0,6	6	29,40	**116**	31,68	**36700**

P	●	○
M	●	●
K	●	○
N	○	
S		●
H		○
O	○	

→ v_c Page 45

8

Right hand internal thread turning insert – Mini size 06

▲ Full profile
▲ Thread production from diameter 6 mm



CCN1525 CCN2520

Designation	TPI 1/"	PDX mm	PDY mm	INSL mm	IR 71 230 ... EUR X3		IR 71 230 ... EUR X3	
06 IR 26	26	0,7	0,6	6	29,40	**13500**	31,68	**33500**
06 IR 22	22	0,6	0,6	6	29,40	**13100**	31,68	**33100**
06 IR 20	20	0,6	0,7	6	29,40	**12900**	31,68	**32900**
06 IR 18	18	0,6	0,7	6	29,40	**12500**	31,68	**32500**

P	●	○
M	●	●
K	●	○
N	○	
S		●
H		○
O	○	

→ v_c Page 45

Right hand internal thread turning insert – Mini size 06

▲ Partial profile
▲ Thread production from diameter 6 mm



CCN1525 CCN2520

Designation	TP mm	INSL mm	PDX mm	PDY mm	IR 71 274 ... EUR X3		IR 71 272 ... EUR X3	
06 IR A60	0,5 - 1,25	6	0,6	0,6	29,40	210	31,68	30000
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

→ v_c Page 45

Right hand internal thread turning insert – Mini size 06

▲ Partial profile
▲ Thread production from diameter 6 mm



CCN1525 CCN2520

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IR 71 272 ... EUR X3		IR 71 272 ... EUR X3	
06 IR A55	48 - 20	6	0,5	0,6	29,40	10100	31,68	30100
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

→ v_c Page 45

Right hand internal thread turning insert – Mini size 08

▲ Full profile
▲ Thread production from diameter 8 mm





CCN1525 CCN2520



Designation	TP mm	PDX mm	PDY mm	INSL mm	IR 71 224 ... EUR X3		IR 71 224 ... EUR X3	
08 IR 0,5	0,50	0,6	0,5	8	31,68	**14300**	31,68	**34300**
08 IR 0,75	0,75	0,6	0,5	8	31,68	**13700**	31,68	**33700**
08 IR 1,0	1,00	0,6	0,6	8	31,68	**13300**	31,68	**33300**
08 IR 1,25	1,25	0,6	0,7	8	31,68	**13100**	31,68	**33100**
08 IR 1,5	1,50	0,6	0,7	8	31,68	**12900**	31,68	**32900**
08 IR 1,75	1,75	0,6	0,8	8	31,68	**12700**	31,68	**32700**
08 IN 2,0	2,00	0,9	4,0	8	31,68	**12500**[1)]	31,68	**32500**[1)]
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

1) Neutral version (N)

→ v_c Page 45

8

Right hand internal thread turning insert – Mini size 08

▲ Partial profile
▲ Thread production from diameter 8 mm



CCN1525 CCN2520

Designation	TP mm	INSL mm	PDX mm	PDY mm	IN 71 273 ... EUR X3		IN 71 273 ... EUR X3	
08 IN M60	1,75 - 2,0	8	0,8	4	31,68	**10800**	31,68	**30800**
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

→ v_c Page 45

Right hand internal thread turning insert – Mini size 08

▲ Partial profile
▲ Thread production from diameter 8 mm



CCN1525 CCN2520

Designation	TP mm	PDX mm	PDY mm	INSL mm	IR 71 272 ... EUR X3		IR 71 272 ... EUR X3	
08 IR A60	0,5 - 1,25	0,6	0,6	8	31,68	**10600**		
08 IR A60	0,5 - 1,5	0,6	0,7	8			31,68	**30600**
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

→ v_c Page 45

Right hand internal thread turning insert – Mini size 08

▲ Partial profile
▲ Thread production from diameter 8 mm



CCN1525 CCN2520

Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IN 71 273 ... EUR X3		IN 71 273 ... EUR X3	
08 IN M55	14 - 11	8	0,9	4	31,68	**10900**	31,68	**30900**
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

→ v_c Page 45

Right hand internal thread turning insert – Mini size 08

▲ Partial profile
▲ Thread production from diameter 8 mm



CCN1525



CCN2520



Designation	TPI 1/"	INSL mm	PDX mm	PDY mm	IR 71 272 ... EUR X3		IR 71 272 ... EUR X3	
08 IR A55	48 - 16	8	0,6	0,7	31,68	**10700**	31,68	**30700**
P					●		○	
M					●		●	
K					●		○	
N					○			
S							●	
H							○	
O					○			

→ v_c Page 45

8

Right Hand Internal Thread Holder – Mini size 06

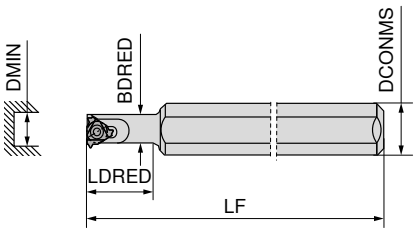

ISO designation	LF mm	LDRED mm	DCONMS mm	BDRED mm	DMIN mm	Insert	torque moment Nm	Right-hand 71 282 ... EUR Y2	
SI R 0005 H06	100	12	12	5,1	6	06 ..	0,6	144,70	**00500**
SI R 0005 H06 C	100	26	6	5,1	6	06 ..	0,6	270,10	**10500**[1]

1) Solid Carbide Shank with Thro' Coolant

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		71 950 ... EUR Y2	
71 282 00500	T06	10,87	**108**	2,64	**23800**
71 282 10500	T06	10,87	**108**	2,64	**23800**

Right Hand Internal Thread Holder – Mini size 08

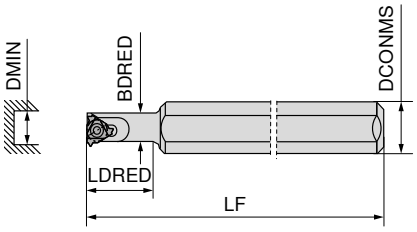

ISO designation	LF mm	LDRED mm	DCONMS mm	BDRED mm	DMIN mm	Insert	torque moment Nm	Right-hand 71 282 ... EUR Y2	
SI R 0007 K08	125	18	16	6,6	7,8	08 ..	0,6	144,70	**00700**
SI R 0008 K08U	125	21	16	7,3	9,0	08 .N	0,6	162,40	**00800**[1]
SI R 0007 K08CB	125	31	8	6,6	7,8	08 ..	0,6	339,10	**10700**[2]

1) Neutral insert indicated by marking (N)
2) Solid Carbide Shank with Thro' Coolant

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		71 950 ... EUR Y2	
71 282 00700	T06	10,87	**108**	2,78	**23900**
71 282 00800	T06	10,87	**108**	2,78	**23900**
71 282 10700	T06	10,87	**108**	2,78	**23900**

Shims for Standard Threading Inserts

▲ Use the formula on **page 47** to calculate the required correction angle α (±).
▲ Then find the corresponding correction plate below.

Pitch-angle β	Correction angle α	AE 16 ER 16 / IL 16		AI 16 EL 16 / IR 16		AE 22 ER 22 / IL 22		AI 22 EL 22 / IR 22		AE 22 U ER 22 / IL 22		AI 22 U EL 22 / IR 22		AE 16 M ER 16 / IL 16		AI 16 M EL 16 / IR 16	
		71 950 ...		71 950 ...		71 950 ...		71 950 ...		71 950 ...		71 950 ...		71 950 ...		71 950 ...	
		EUR Y2		EUR Y2		EUR Y2		EUR Y2		EUR Y2		EUR Y2		EUR Y2		EUR Y2	
+ 4,5°	+ 3°	13,91	118	13,91	126	22,32	134	22,32	142	22,32	150 [1]	22,32	158 [1]				
+ 3,5°	+ 2°	13,91	119	13,91	127	22,32	135	22,32	143	22,32	151 [1]	22,32	159 [1]				
+ 2,5°	+ 1°	13,91	120	13,91	128	22,32	136	22,32	144	22,32	152 [1]	22,32	160 [1]				
+ 1,5°	0°	12,16	121	11,07	129	17,63	137	17,63	145	17,63	153 [1]	17,63	161 [1]	16,39	101	16,39	108
+ 0,5°	- 1°	13,91	122	13,91	130	22,32	138	22,32	146	22,32	154 [1]	22,32	162 [1]				
0°	- 1,5°	13,91	123	13,91	131	22,32	139	22,32	147								
- 0,5°	- 2°	13,91	124	13,91	132	22,32	140	22,32	148	22,32	156 [1]	22,32	164 [1]				
- 1,5°	- 3°	13,91	125	13,91	133	22,32	141	22,32	149	22,32	157 [1]	22,32	165 [1]				

1) Neutral version for tool holder identified by (U).

Flank clearance angle and effective approach angle

The angle of inclination λ of the cutting edges, in concert with the thread approach angle β ensures an equal rake angle and side clearance angle on both thread flanks.

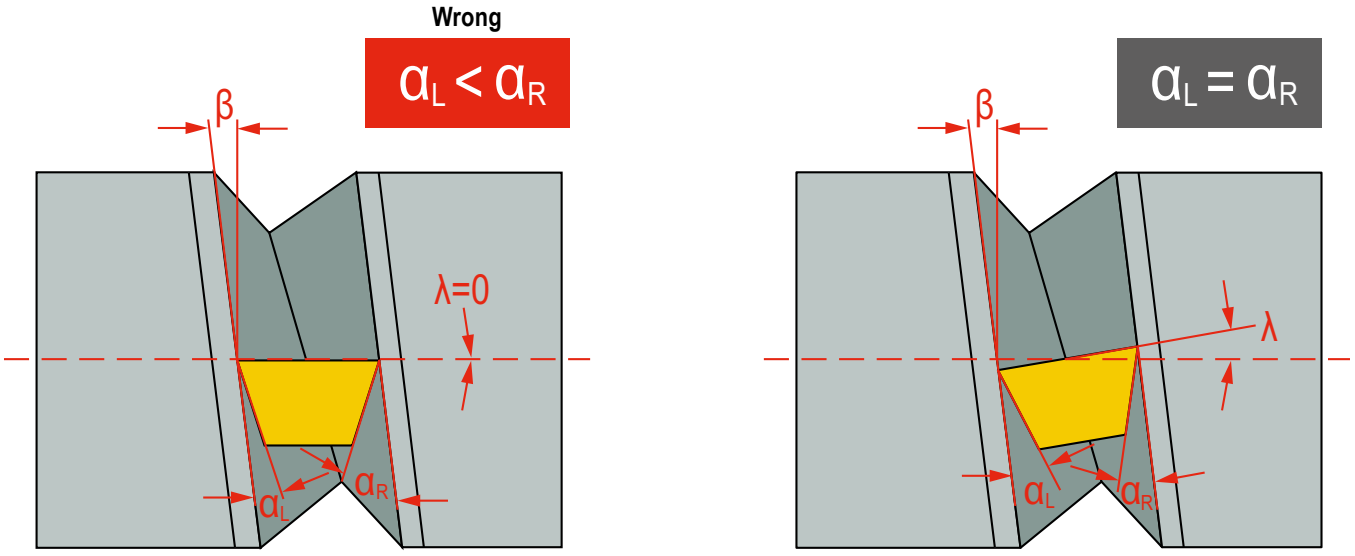

α = Side clearance angle
λ = Pitch angle
β = An effective angle of inclination is achieved by using a suitable insert seat

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values

Index	CCN1525 Mini	CCN2520 Mini	CWN1525	HCN2525	CCN7525	CCN20	CWK20
	v_c (m/min)						
P.1.1	**80**	120	**120**	120	**120**	**120**	
P.1.2	**80**	120	**120**	120	**120**	**120**	
P.1.3	**80**	120	**120**	120	**120**	**120**	
P.1.4	**80**	80	**80**	90	**80**	**80**	
P.1.5	**70**	80	**80**	90	**80**	**80**	
P.2.1	**50**	80	**80**	90	**80**	**80**	
P.2.2	**50**	80	**80**	90	**80**	**80**	
P.2.3	**50**	80	**80**	90	**80**	**80**	
P.2.4	**50**	80	**80**	90	**80**	**80**	
P.3.1	**50**	50	**60**	70	**50**	**50**	
P.3.2	**50**	50	**60**	70	**50**	**50**	
P.3.3	**50**	50	**60**	70	**50**	**50**	
P.4.1	**50**	50	**60**	70	**50**	**50**	
P.4.2	**50**	50	**60**	70	**50**	**50**	
M.1.1	**40**	**90**	60	**110**	**90**	**60**	40
M.2.1	**40**	**90**	60	**110**	**90**	**60**	40
M.3.1	**40**	**90**	60	**110**	**90**	**60**	40
K.1.1	**60**	120	**90**	140	**120**	**120**	**80**
K.1.2	**60**	120	**90**	140	**120**	**120**	**80**
K.2.1	**60**	100	**80**	120	**100**	**100**	**70**
K.2.2	**60**	100	**80**	120	**100**	**100**	**70**
K.3.1	**50**	100	**80**	110	**100**	**100**	**70**
K.3.2	**50**	100	**80**	110	**100**	**100**	**70**
N.1.1	500		**600**	700			**150**
N.1.2	300		**600**	700			**150**
N.2.1	120		**250**	280			**120**
N.2.2	120		**250**	280			**120**
N.2.3	120		**250**	280			**120**
N.3.1	110		**150**	190			**100**
N.3.2	150		**150**	190			**100**
N.3.3	150		**150**	190			**100**
N.4.1	300		**300**	220			**150**
S.1.1		**25**		20	**25**	20	20
S.1.2		**25**		20	**25**	20	20
S.2.1		**25**		20	**25**	20	20
S.2.2		**25**		20	**25**	20	20
S.2.3		**25**		20	**25**	20	20
S.3.1		**35**		30	**35**	30	30
S.3.2		**35**		30	**35**	30	30
S.3.3		**35**		30	**35**	30	30
H.1.1		35		30	35	30	
H.1.2		35		30	35	30	
H.1.3		35		30	35	30	
H.1.4		35		30	35	30	
H.2.1		25		20	25	20	
H.3.1		25		20	25	20	
O.1.1	150		200				
O.1.2	150		200				
O.2.1	150		200				
O.2.2	150		200				
O.3.1	150		200				

The cutting data depends extremely on the external conditions, the material and machine type.
The indicated values are possible values which have to be increased or reduced according to the application conditions.

8

Thread turning methods

External right-hand thread



External left-hand thread



The machining examples 2, 4, 6 and 8 require negative shims!
These shims can be found on → **Page 43.**

Internal right-hand thread



Internal left-hand thread



Thread infeed methods

Radial Infeed



- for pitches less than 1.5 mm
- for short chipping materials
- for machining hardened materials
- simple and quick method

Flank infeed



- for pitches larger than 1.5 mm
- with radial penetration the effective cutting edge length is too large, which may lead to chattering
- with trapezoidal and ACME threads, chip flow on three sides can be problematic

Alternating infeed



- with large pitches
- for long chipping materials
- uniform wear of the cutting edges
- complicated programming process

Recommended number of cuts and cutting depths

Standard Threading Inserts

Pitch (TP/TPI)		mm	0,50	0,75	1,00	1,25	1,50	1,75	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	8,00
		TPI	48	32	24	20	16	14	12	10	8	7	6	5.5	5	4.5	4	3
Number of passes			4–6	4–7	4–8	5–9	6–10	7–12	7–12	8–14	9–16	10–18	11–18	11–19	12–20	12–20	12–20	15–24
Number of passes	**(CCN7525)**		3–4	3–4	3–5	4–6	5–6	6–8	6–8	8–10								
Number of passes	**Mini Inserts**		6–9	6–11	6–12	8–14	9–15	11–18	11–18									

Multi edge thread turning insert

Standard	Insert	Insert size		Pitch (TP)	Number of flutes (NT)	Designation	Passes	Cutting depth per pass		
		IC	L mm					1	2	3
ISO external	M	3/8"	16	1,0 mm	3	3 ER 1.0 ISO 3M	2	0,38	0,25	
ISO external	M	3/8"	16	1,5 mm	2	3 ER 1.5 ISO 2M	3	0,42	0,30	0,20

Pitch angle

Important Information about Standard Shims

- ▲ the pitch angle should be determined through calculation or by using the chart below.
- ▲ the standard threading holder is supplied with a 1.5° inclined insert seat and a shim without angular correction.
  Hence the Tool holders are delivered with an angle of inclination β of 1.5°.

Without the appropriate correction of the helix angle, the following may occur

- ▲ the profile will be distorted.
- ▲ insufficient clearance angle.
- ▲ the tool life of the insert is greatly reduced.

Method 1: Calculation

Calculating the helix angle β:

$$\beta = \frac{20 \times TP}{DMIN}$$

For trapezium:

$$\frac{15 \times TP}{DMIN}$$

20 = constant
β = Helix angle (°)
TP = Pitch (mm)
DMIN = Nominal diameter (mm)



Example calculation

External thread M24 x 1.5
Feed towards chuck
DMIN = Nominal Ø: M24 = 24 mm
TP = Pitch: 1.5 mm

$$\beta = \frac{20 \times 1{,}5 \text{ mm}}{24 \text{ mm}}$$

β = 1,25°

Method 2: Diagram

From the flank Ø in the diagram, a line is drawn vertically upwards until it intersects with the line of the pitch of the thread to be produced. In the color-coded region in which it is now, a horizontal line to the edge of the chart indicates the appropriate factor.

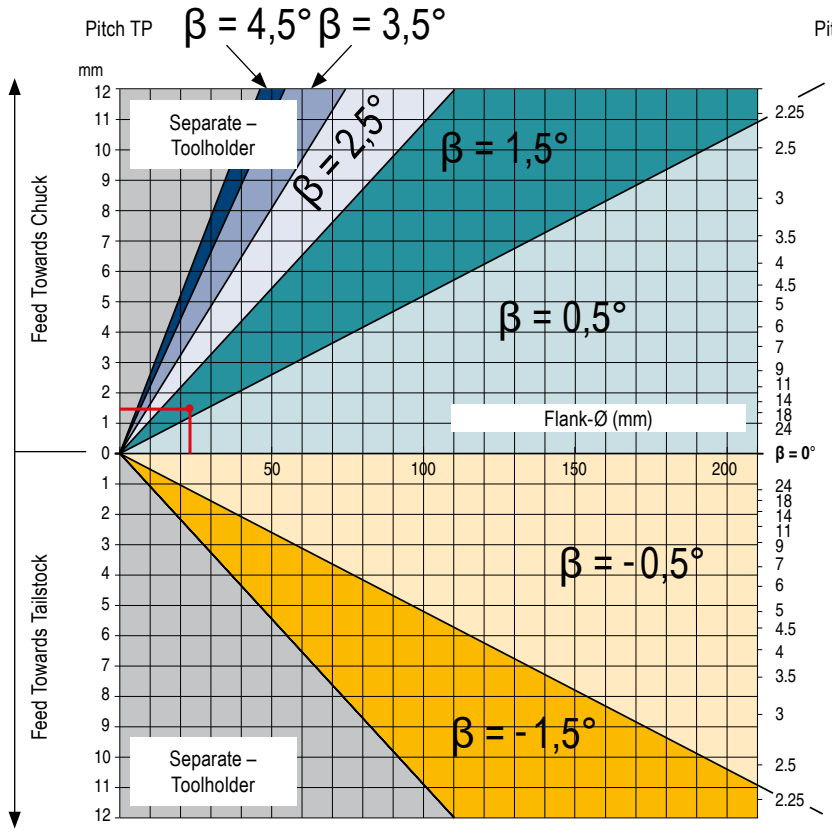

Calculated pitch angle β value	Correction angle α
0,0°–0,49°	-1,5°
0,5°–0,99°	-1°
1,0°–1,99°	0°
2,0°–2,99°	+1°
3,0°–3,99°	+2°
4,0°–4,99°	+3°
0,0°–(-0,49°)	-2°
-0,5°–(-1,5°)	-3°

8

Designation key – indexable inserts

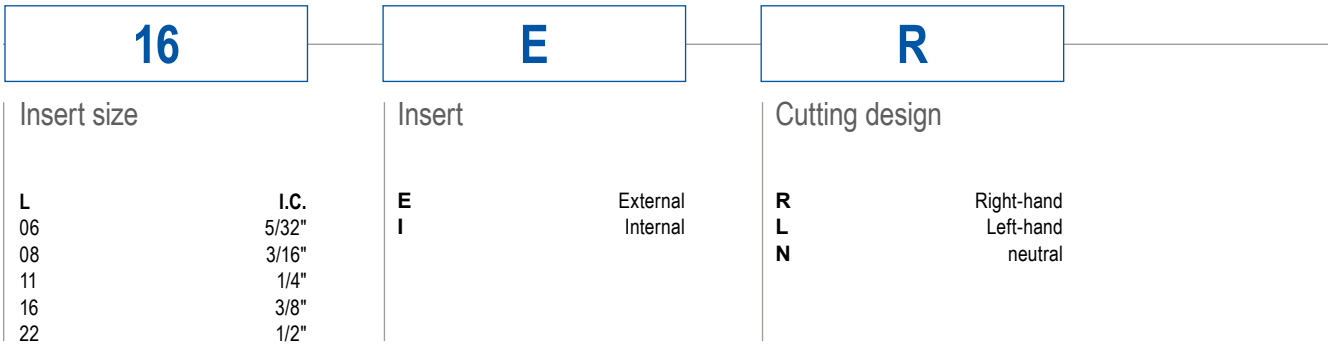

Example

16 ER AG 60
ER16 right hand - external insert with a pitch of 0.5-3.0 mm

Designation key – holders

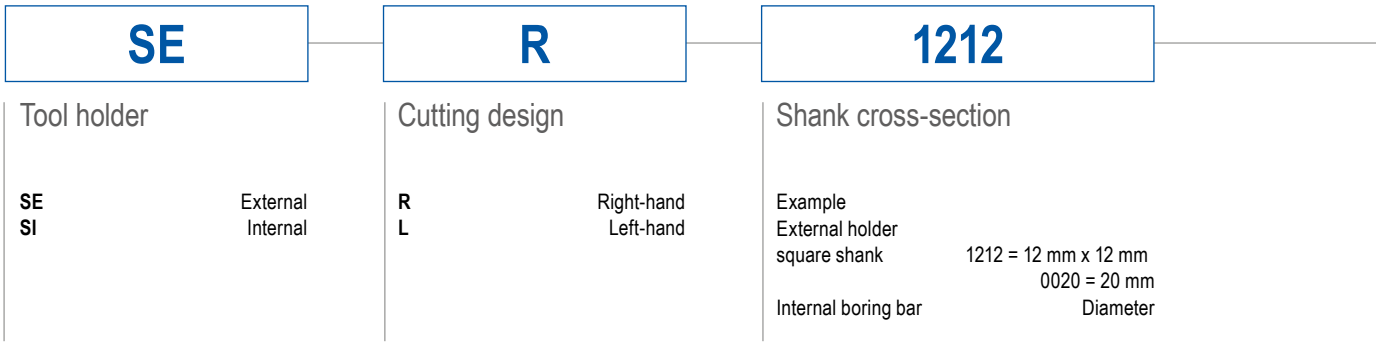

Example

SE R 1212 F 16
Right hand holder with 12 x 12 mm square shank,
overall length of 80 mm, only suitable for an ER16 threading insert

AG 60

Pitch (TP/TPI)

Full profile

mm	G/Z
0,35	72–4

Partial profile

	mm	G/Z
A	0,5–1,5	48–16
AG	0,5–3,0	48–8
M	1,7–2,0	14–11
G	1,75–3,0	14–8
N	3,5–5,0	7–5
U	5,5–8,0	4,5–3,5

Flank angle
55°
60°

Number of flutes (NT)

2M	Multi-tooth insert with 2 teeth
3M	Multi-tooth insert with 3 teeth

8

F

Overall length

	mm
F	80
H	100
K	125
L	140
M	150
P	170
R	200
S	250
T	300

16

Insert size

L	I.C.
06	5/32"
08	3/16"
11	1/4"
16	3/8"
22	1/2"

Properties

B	with thro' coolant
C	with carbide shank
U	neutral holder

Troubleshooting

Edge chipping



Cause

- Common in stainless materials
- Incorrect grade

Remedy

- Minimize tool overhang length
- Check that the insert is clamped
- Minimize vibration
- Use a tougher grade

Cratering



Cause

- Common in stainless materials
- Cutting speed too high
- Incorrect grade

Remedy

- Apply coolant
- Reduce depth of cut
- Use a harder grade

Built-up edge



Cause

- Cutting speed too low
- Incorrect grade

Remedy

- Apply coolant
- Increase cutting speed
- Use a tougher grade

Thermal cracking



Cause

- Insufficient coolant
- Cutting speed too high
- Incorrect grade

Remedy

- Apply coolant
- Reduce cutting speed
- Use a tougher grade

Plastic deformation



Cause

- Infeed too large
- Insufficient coolant
- Cutting speed too high
- Incorrect grade

Remedy

- Apply coolant
- Reduce depth of cut
- Reduce cutting speed
- Use a harder grade

Breakage



Cause

- Infeed too large
- Insufficient coolant
- Plastic deformation
- Instability
- Helix angle not appropriate
- Incorrect grade

Remedy

- Reduce depth of cut
- Check machine and tool stability
- Reduce cutting speed
- Check helix angle
- Use a tougher grade

Grade description

Universal

CCN7525
- Carbide, TiAlN-coated
- ISO | **P25** | **M25** | **K25** | **S25** | H25
- The universal carbide grade with sintered chip breaker for medium to high cutting speeds

CCN2520
- Carbide, TiAlN-coated
- ISO | P25 | **M25** | K25 | **S25** | H25
- The coated carbide grade for the machining of stainless steels at medium to high cutting speeds

CCN1525
- Carbide, TiN-coated
- ISO | **P25** | **M25** | **K25** | N25 | O25
- The coated carbide grade for machining steels and stainless steels at low cutting speeds

Non-ferrous metals

CWK20
- Carbide, uncoated
- ISO | M10 | **K10** | **N10** | S10
- The wear-resistant carbide grade for machining aluminium and other non-ferrous metals

Steel

CCN20
- Carbide, TiAlN-coated
- ISO | **P20** | **M20** | **K20** | S20 | H20
- The all-round carbide grade for machining steels at low cutting speeds

CWN1525
- Carbide, TiN-coated
- ISO | **P25** | M25 | **K25** | **N25** | O25
- The universal carbide grade for machining steels and non-ferrous metals at low cutting speeds

Stainless steel

HCN2525
- Carbide, TiAlN-coated
- ISO | P25 | **M25** | K25 | N25 | S25 | H25
- The coated carbide grade for machining stainless steels at high cutting speeds
- Also suitable for exotic materials

8

Profile Type Description

Full profile



- Thread diameter must not be turned to final thread size
- a minimum infeed of 0.07 mm is necessary
- Insert can only be used only for a specific pitch

Advantages:
- High-quality thread
- No burr formation
- No rework
- In part longer service life

Partial profile

- Core diameter must be premachined to the finished size
- A minimum infeed of 0.07 mm is required

Advantages:
- One threading insert can be used to machine several pitches
- Threading insert can be used for any application
- Reduced stock requirements

Multi-Tooth Thread Turning Insert

- Thread diameter must not be turned to final thread size
- a minimum infeed of 0.07 mm is necessary
- Insert can only be used only for a specific pitch

Advantages:
- Fewer passes required
- Thread production in less time

Attention:
- Check there is sufficient thread run-out

Mini Thread Turning Insert

- From a min. core hole diameter of Ø 6 mm or Ø 8 mm

Advantages:
- Special cutting materials for low cutting speeds
- 3 cutting edges for miniature applications

New products for machining technicians

NEW

Steel machining with the new ISO-P grades



Thanks to a CVD multilayer coating with the latest Dragonskin coating technology, the indexable inserts are ideally suited to versatile steel machining. In combination with a balanced carbide base substrate, the new grades in the ISO-P category boast a wide application area with improved wear resistance. Depending on the cutting conditions, the perfect cutting material can be selected from three grades.

NEW

Tool holder with square shank – MaxiLock-S DC for positive indexable inserts



The new MaxiLock-S DC tool holders improve both your process security and the service life of the tool cutting edges with targeted cooling. Suitable for a wide range of positive indexable inserts.

NEW

Tool holder with square shank – MaxiLock-N DC for negative indexable inserts



Improve your machining process with precision cooling on the tool cutting edge. The cooling has a particularly efficient effect on the flank of the tool. Suitable for a wide range of negative indexable inserts using toggle clamps.

Suitable adapters for our square rotating- and grooving holders can be found in **Chapter 16 Adapters and accessories**.
Available for machine interfaces VDI and BMT.
New: Adapters with HSK-T machine interface → **Chapter 16, pages 194+195**

NEW

-M23 chip breaker

→ Page 125

Soft cutting geometry with excellent Chip breaking behavior at low cutting depths for steel machining. Available for positive round inserts in the ISO-P carbide grades.

NEW

MaxiChange – Exchangeable head system

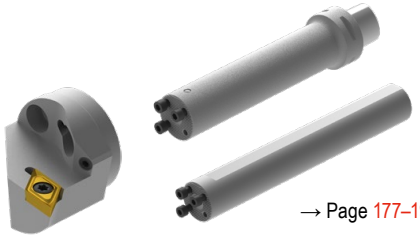

→ Page 177–192

The new actively vibration-dampened basic holder for demanding internal turning operations. Available with the Machine interface PSC, HSK-T and cylindrical shank.

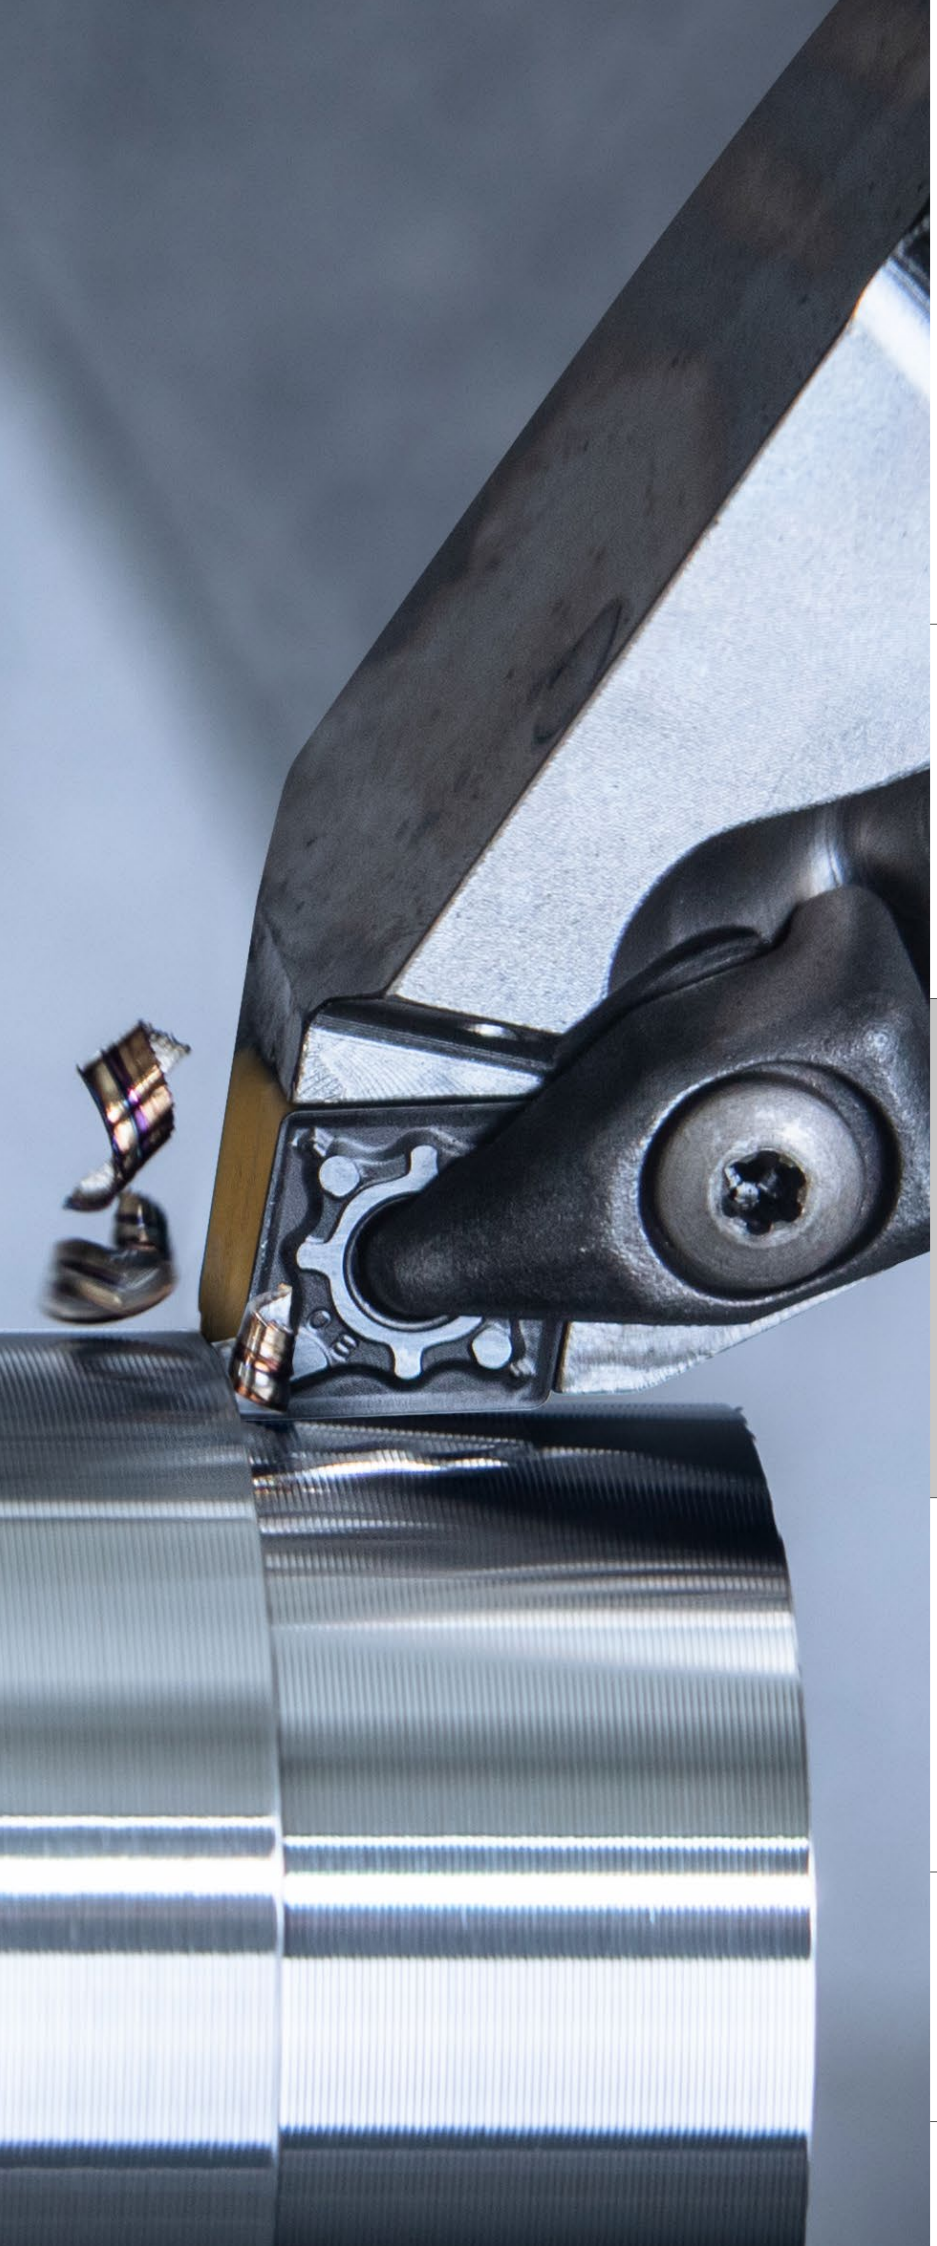

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	5
Toolfinder – Application	4+5
Chip Breakers Overview / Grade description	6
Toolfinder – negative inserts	7
Toolfinder – positive inserts	8
Toolfinder – holders	9
Toolfinder – exchange head system	10
Product programme	12–195
Technical Information	
Cutting Data	196–209
Diamond as a cutting material	210
Chip breakers	211–217
Clamping systems	217
Trailing edge geometry – information	218+219
ISO designation system	220–225
Wear types in indexable inserts	226+227
Grades Overview	228–231

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Toolfinder – Application

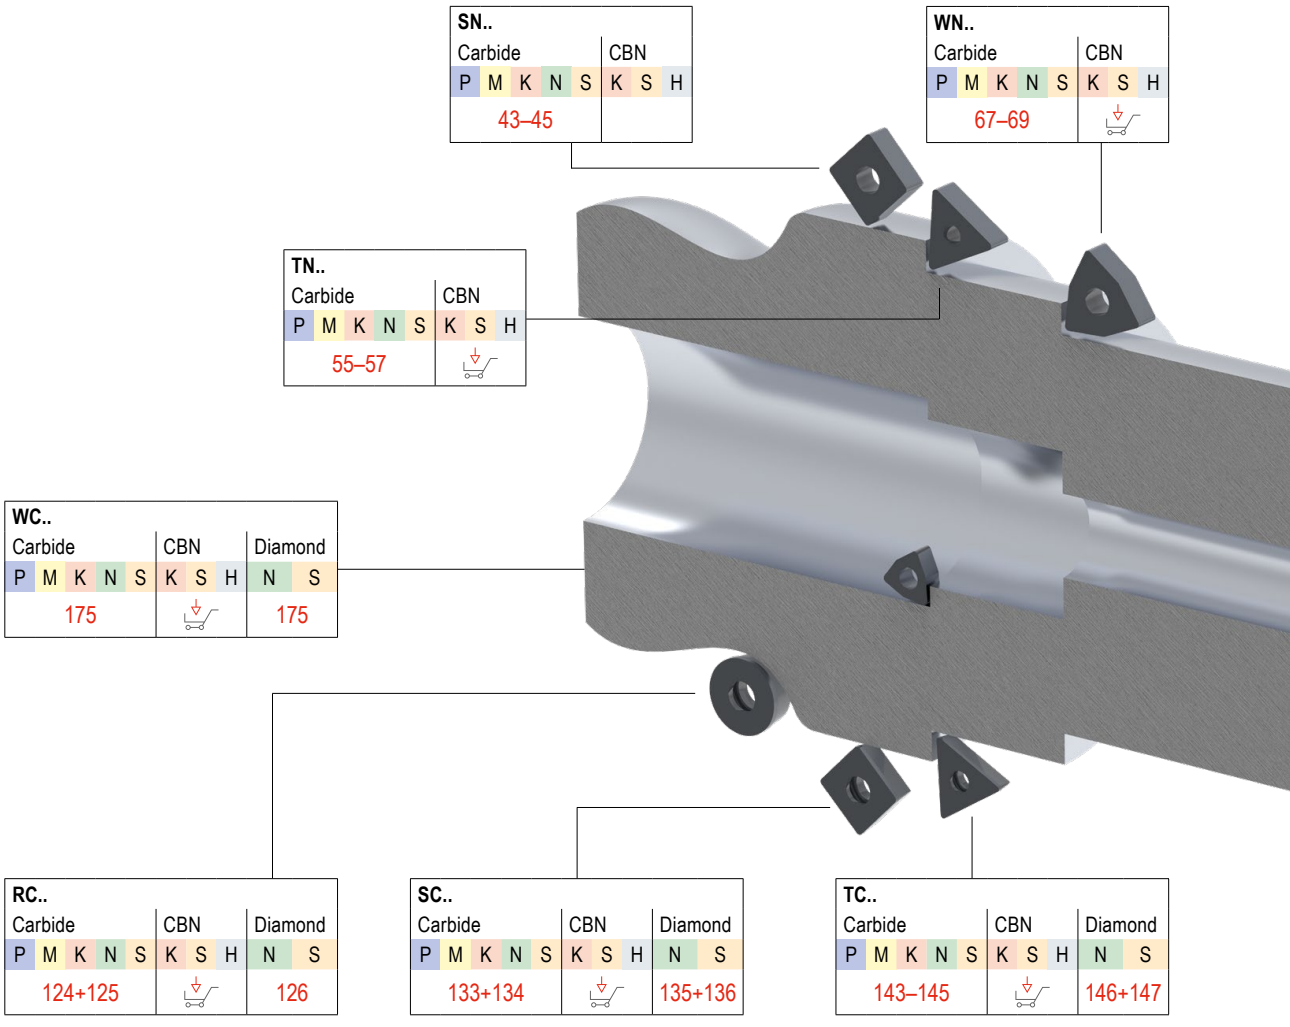

Symbol explanation

CTCP125-P *Carbide Grade*

F	Fine Machining
M	Medium Machining
R	Rough Machining

Smooth cut
Irregular cutting depth
Interrupted cut

Int. coolant supply

Direct Cooling — DirectCooling

A detailed overview of grades can be found in the technical appendix on → **page** 228

Hard turning with PCBN indexable inserts

cts.ceratizit.com/ie/en/pcbn-indexable-inserts

The tool selection for Sliding head machines

cts.ceratizit.com/ie/en/sliding-head-turning

9

CN..

Carbide					CBN			Diamond	
P	M	K	N	S	K	S	H	N	S
12–16								17	

DN..

Carbide					CBN			Diamond	
P	M	K	N	S	K	S	H	N	S
26–29								30	

VN..

Carbide					CBN		
P	M	K	N	S	K	S	H
62+63							

KN..

Carbide				
P	M	K	N	S

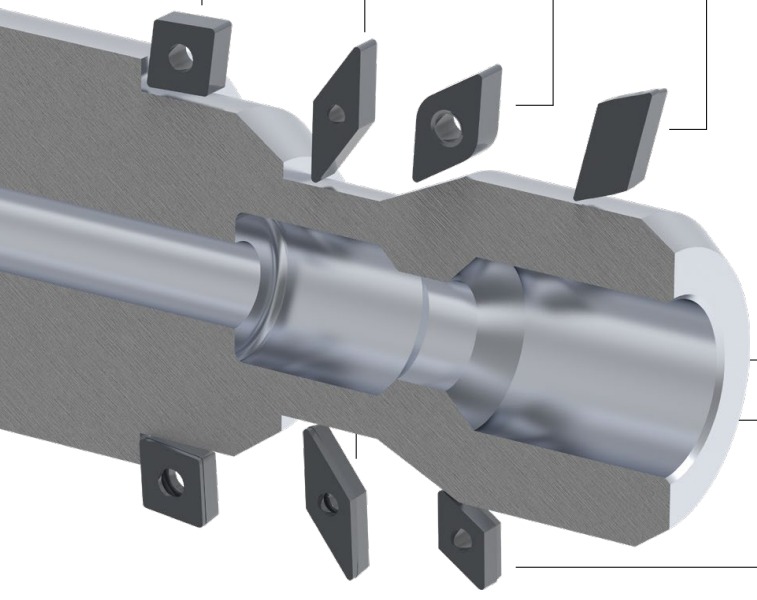

CC..

Carbide					CBN			Diamond	
P	M	K	N	S	K	S	H	N	S
76–79								80–84	

VC..

Carbide					CBN			Diamond	
P	M	K	N	S	K	S	H	N	S
153–155								157–159	

DC..

Carbide					CBN			Diamond	
P	M	K	N	S	K	S	H	N	S
99–102								104–108	

This article can be found in our online shop at cuttingtools.ceratizit.com

Chip Breakers Overview



			Sharp			medium		stable		
			●			● ●		● ● ●		
			5	10	20	30	40	50	60	70
increasing wedge angle	fine	F	-F05 -CF05	-SF -23P	-CF / -CF20	-F30 -SMF	-F34 -F40 -TFQ	-F50 -CF55		
	medium	M		-M23	-25P -25Q -M25	-XU -M30 -SM -SMQ	-M34 -M40 -TMQ	-M42 -M50 -M55 -27	-M60 -29	-M70
	rough	R					-NMA	-R28	-R58	-R88

Grade description

C T C P 1 2 5 -P (Example)

CT
CERATIZIT

-P
Performance

Degree of hardness

05	ISO 05
10	ISO 10
15	ISO 15
20	ISO 20
25	ISO 25
30	ISO 30
35	ISO 35
40	ISO 40

Application

1	Turning
2	Milling
3	Grooving
4	Drilling
5	Thread turning
6	Others
7	Several processes

Main application – material

P	Steel
M	Stainless steel
K	Cast iron
N	Non-ferrous metals
S	Heat-resistant
H	Tempered steel
O	Non-metal materials
X	Universal application

Coating

W	Uncoated carbide
C	CVD-coated carbide
P	PVD-coated carbide
T	Cermet, uncoated
E	Cermet, coated
N	Silicon nitride, uncoated
M	Silicon nitride, coated
S	Mixed ceramic
K	Whisker ceramic
I	SiAlON
D	PDC
B	PcBN
H	HSS sintered

Toolfinder – negative inserts

				Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Geometry						
				P	M	K	N	S	H	O	CN..	DN..	KN..	SN..	TN..	VN..	WN..
Main application: **Steel and cast iron**	Sharp → stable	Fine	-CF / -CF20	●	○	○					12	26			55		67
			-F40	●		○										62	
			-F50	●		○					12	26		43	55	62	67
			-TFQ	●	○	○					12+13	27					67
		Medium	-XU	●		○					13	27				62	68
			-M40	●		○										62	
			-M50	●	○	○					13	27		43	55	62	68
			-TMQ	●		○					13	27					68
			-M70 | -11, -12	●	○	○					13+14	28	🛒	44	56		68
		Rough	.NMA	●	○						14	28		44	56		69
			-R28	●	○	○					14	28		45	56		
			-R58	●	○	○					14+15	28+29		45	56+57		
			-R88	●	○	○					15			45			
Main application: **Stainless**	Sharp → stable	Fine	-F30	○	●			○			15	29		46	57	62	69
		Medium	-M30	○	●			○			15	29		46	57	62+63	69
			-42	○	●			○			15						
			-M42	○	●			●			16	29		46	57		69
			-M60	○	●			○			16	29		45	57		69
			-M70	○	●			○			13–15	28+29		46	57		69
Main application: **Heat-resistant**	Sharp → stable	Fine	-F32		●		○	●			🛒	🛒				🛒	
			-F34	○	●		○	●			16						70
		Medium	-M34	●	●		○	●			16	29		45	57	63	70
			-M42	○	●		○	●			16	29			🛒		🛒
			-M52		●		○	●			🛒	🛒		🛒	🛒		🛒
Main application: **Non-ferrous metals**		Diamond	FN , FL, FR				●			●	17	30					

🛒 This article can be found in our online shop at cuttingtools.ceratizit.com

9

Toolfinder – positive inserts

				Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Geometry								
				P	M	K	N	S	H	O	CC..	DC..	RC..	SC..	SP..	TC..	TP..	VC..	WC..
Main application: **Steel and cast iron**	Sharp	Fine	-CF05	●	○	○					76	99		133		143		153	
			-SF	●	○	○					76–78	99–101		133		143		153+154	175
		Medium	-CF55	●	○	○					76	99		133		143		153	
			-M23	●		○							125						
			-SMF	●	○	○					76–78	99+105	124	133		143		153+154	
			-SM	●	○	●					77+78	100	124+125	133		143		154	
			-SMQ	●		○					77+78	101							
	stable		-EN, -EL, -ER	●	○	●													
Main application: **Stainless**	Sharp	Fine	-F43	○	●			○			78	101				144			
			-M81	○	●			○											
		Medium	-M25	○	●			●			78	101		134		144		154	
	stable		-M55	○	●			●			78	101		133+134		144+145		154+155	
Main application: **Non-ferrous metals**	Sharp	Fine	-23P			○	●			○	78	102							
		Medium	-25P	●	●	○	●	●		○	78	102	125	134				155	
			-25Q	●	●	○	●	●		○	79	102						155	
			-27	●	●	○	●	●		○	79	102	125	134		145		156	
	stable		-29			○	●			○	79	103						156	
		Diamond	-FN , -FL, -FR				●			●	80–84	104–108	126	135+136		146+147		157–159	175
			CB1				●			●	81+84	105–108	126	135		146		158+159	
			CB2				●			●	81+84	105 107+108	126	136		147		158+159	
			CB3				●			●	83	107		136		147		159	
Main application: **Heat-resistant**	Sharp	Fine	-F05	●	●		●	●			79	103						156	
	stable		-F23		●	○	○	●											

This article can be found in our online shop at cuttingtools.ceratizit.com

Toolfinder – holders

Toolholders and boring bars for negative inserts

Geometry	Tool holder	Boring bars	HSK-T	PSC
CN..	18–21	24+25	22	23
DN..	31–34	41+42	34–36	37–40
SN..	47–52	54	52	
TN..	58–60	61		
VN..	64		65	65+66
WN..	71+72	74+75	73	73

Toolholders and boring bars for positive inserts

Geometry	Tool holder	Boring bars	HSK-T	PSC
CC..	85–91	94–98	92	93
DC..	109–115	119–123	116	117+118
RC..	127–131		132	
SC..	137–141	142		
TC..	148–151	152		
VC..	160–168	172–174	168–170	170+171
WC..		176		

Suitable coolant accessories can be found on → **page** 193–195.

MaxiChange – Overview of the product range

As the MaxiChange exchangeable head system is modular, it is extremely flexible and can be used for a variety of applications thanks to the wide selection of exchangeable heads. On top of these advantages, the MaxiChange GX also includes a grooving function for internal and external machining as well as axial and radial machining.

Exchangeable heads

For negative inserts

PCLN 95°

187

PDUN 93°



187

PDQN 107,5°

188

PWLN 95°

188

For positive inserts

SCLC 95°



189

SDUC 93°

189

SDQC 107,5°

190

NEW

SVPC 117,5°



190

NEW

SVUC 93°

191

NEW

SVQC 107,5°



191

For internal thread



192

→ Chapter 11 – Grooving tools

For radial grooving

NEW

GX 16



For axial grooving

NEW

GX 24



Tool holder

PSC

177

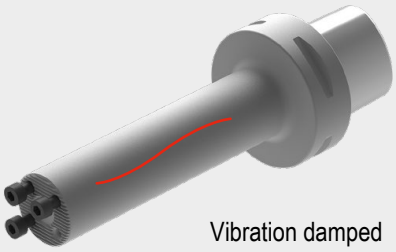

Vibration damped

178

Actively vibration-damped

179

HSK-T

180

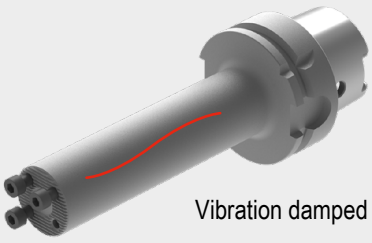

Vibration damped

181

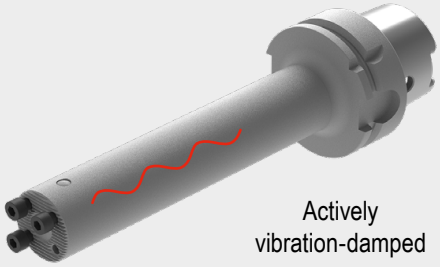

Actively vibration-damped

182

Cylindrical shank

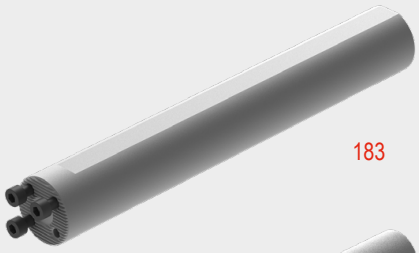

183

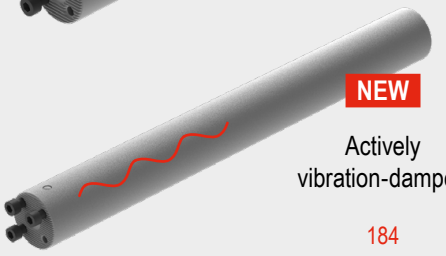

NEW

Actively vibration-damped

184



NEW

Square shank holder 0°

185



NEW

Square shank holder 90°

186

9

CNMG / CNMA / CNMM

Designation	L	S	D1	IC
	mm	mm	mm	mm
CNMG 0903..	9,7	3,18	3,81	9,52
CNM. 1204..	12,9	4,76	5,16	12,70
CNM. 1606..	16,1	6,35	6,35	15,87
CNM. 1906..	19,3	6,35	7,94	19,05
CNMM 2509..	25,8	9,52	9,12	25,40



CNMG

		NEW	NEW	NEW	NEW
	-CF TCM10	-CF20 CTEP110	-TFQ CTEP110	-F50 CTCP115-P	-F50 CTCP125-P	-F50 CTCP135-P	-TFQ CTCP115-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
	F	F	F	F	F	F	F
	CERMET CNMG	CERMET CNMG	CERMET CNMG	CNMG	CNMG	CNMG	CNMG
	70 101 ...	76 101 ...	76 110 ...	76 132 ...	76 132 ...	76 132 ...	76 110 ...
ISO / RE mm	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
090304EN 0,4				9,74 31601	9,79 51601	9,74 71601	
090308EN 0,8				9,74 31801	9,79 51801	9,74 71801	
120404EN 0,4	12,73 904	13,29 028	15,45 028	15,02 32801	15,02 52801	15,02 72801	17,20 32801
120408EN 0,8	12,73 908	13,29 030	15,45 030	15,02 33001	15,02 53001	15,02 73001	17,20 33001
120412EN 1,2			15,45 032	15,02 33201	15,02 53201	15,02 73201	17,20 32001
P	●	●	●	●	●	●	●
M	○	○	○			○	
K	○	○	○	○	○		○
N							
S							
H							
O							

CNMG

		NEW	NEW	NEW			NEW	NEW
		-TFQ CTCP125-P	-XU CTCP115-P	-XU CTCP125-P	-M50 CTCK110	-M50 CTCK120	-M50 CTCP115-P	-M50 CTCP125-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	M	M	M	M	M	M
		CNMG	CNMG	CNMG	CNMG	CNMG	CNMG	CNMG
		76 110 ...	76 290 ...	76 290 ...	70 132 ...	70 132 ...	76 135 ...	76 135 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4	17,20 52801	15,06 32801	15,06 52801	15,02 028		15,02 32801	15,02 52801
120408EN	0,8	17,20 53001	15,06 33001	15,06 53001	15,02 030	15,02 530	15,02 33001	15,02 53001
120412EN	1,2	17,20 53201	15,06 33201	15,06 53201	15,02 032	15,02 532	15,02 32001	15,02 53201
120416EN	1,6						15,02 33401	15,02 53401
160608EN	0,8						24,26 34201	24,26 54201
160612EN	1,2						24,26 34401	24,26 54401
160616EN	1,6						24,26 34601	24,26 54601
P		●	●	●	○	○	●	●
M								
K		○	○	○	●	●	○	○
N								
S								
H								
O								

9

CNMG

		NEW	NEW	NEW			NEW	NEW
		-M50 CTCP135-P	-TMQ CTCP115-P	-TMQ CTCP125-P	-M70 CTCK110	-M70 CTCK120	-M70 CTCP115-P	-M70 CTCP125-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	M	M	M
		CNMG	CNMG	CNMG	CNMG	CNMG	CNMG	CNMG
		76 135 ...	76 196 ...	76 196 ...	70 119 ...	70 119 ...	76 119 ...	76 119 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4	15,02 72801						
120408EN	0,8	15,02 73001	17,20 33001	17,20 53001	15,02 030	15,02 530	15,02 33001	15,02 53001
120412EN	1,2	15,02 73201	17,20 32001	17,20 53201	15,02 032	15,02 532	15,02 32001	15,02 53201
120416EN	1,6	15,02 73401			15,02 034	15,02 534	15,02 33401	15,02 53401
160608EN	0,8	24,26 74201			24,26 042	24,26 542	24,26 34201	24,26 54201
160612EN	1,2	24,26 74401			24,26 044	24,26 544	24,26 34401	24,26 54401
160616EN	1,6	24,26 74601			24,26 046	24,26 546	24,26 34601	24,26 54601
160624EN	2,4						24,26 34801	24,26 54801
190608EN	0,8						34,26 35401	34,26 55401
190612EN	1,2				34,26 056	34,26 556	34,26 35601	34,26 55601
190616EN	1,6				34,26 058	34,26 558	34,26 35801	34,26 55801
190624EN	2,4						34,26 36001	34,26 56001
P		●	●	●	○	○	●	●
M		○						
K			○	○	●	●	○	○
N								
S								
H								
O								

CNMG / CNMA / CNMM

		NEW			NEW	NEW	NEW	NEW
		-M70 CTCP135-P	CTCK110	CTCK120	-R28 CTCP115-P	-R28 CTCP125-P	-R28 CTCP135-P	-R58 CTCP115-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	R	R	R	R	R	R
		CNMG	CNMA	CNMA	CNMM	CNMM	CNMM	CNMM
		76 119 ...	70 100 ...	70 100 ...	76 114 ...	76 114 ...	76 114 ...	76 115 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4		15,02 028	15,02 528				
120408EN	0,8	15,02 73001	15,02 030	15,02 530	15,29 33001	15,29 53001		15,29 33001
120412EN	1,2	15,02 73201	15,02 032	15,02 532	15,29 33201	15,29 53201	15,29 73201	15,29 33201
120416EN	1,6	15,02 73401	15,02 034	15,02 534	15,29 33401	15,29 53401	15,29 73401	15,29 33401
160608EN	0,8	24,26 74201	24,26 042	24,26 542				
160612EN	1,2	24,26 74401	24,26 044	24,26 544	24,26 34401	24,26 54401	24,26 74401	24,26 34401
160616EN	1,6	24,26 74601	24,26 046	24,26 546	24,26 34601	24,26 54601	24,26 74601	24,26 34601
160624EN	2,4	24,26 74801						24,26 34801
190608EN	0,8	34,26 75401						
190612EN	1,2	34,26 75601	34,26 056	34,26 556	34,26 35601	34,26 55601	34,26 75601	34,26 35601
190616EN	1,6	34,26 75801	34,26 058	34,26 558	34,26 35801	34,26 55801	34,26 75801	34,26 35801
190624EN	2,4	34,26 76001			34,26 36001	34,26 56001	34,26 76001	34,26 36001
250924EN	2,4				79,09 38401	79,09 58401	79,09 78401	79,09 38401
P		●	○	○	●	●	●	●
M		○					○	
K			●	●	○	○		○
N								
S								
H								
O								

CNMM

		NEW	NEW	NEW	NEW	NEW
		-R58 CTCP125-P	-R58 CTCP135-P	-R88 CTCP115-P	-R88 CTCP125-P	-R88 CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
		R CNMM	R CNMM	R CNMM	R CNMM	R CNMM
		76 115 ...	76 115 ...	76 133 ...	76 133 ...	76 133 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120408EN	0,8	15,29 53001	15,29 73001			
120412EN	1,2	15,29 53201	15,29 73201			
120416EN	1,6	15,29 53401	15,29 73401			
160612EN	1,2	24,26 54401	24,26 74401			
160616EN	1,6	24,26 54601	24,26 74601			
160624EN	2,4	24,26 54801	24,26 74801			
160624SN	2,4			24,26 34801	24,26 54801	24,26 74801
190612EN	1,2	34,26 55601	34,26 75601			
190616EN	1,6	34,26 55801	34,26 75801			
190616SN	1,6			34,26 35801	34,26 55801	34,26 75801
190624EN	2,4	34,26 52401	34,26 76001			
190624SN	2,4			34,26 36001	34,26 56001	34,26 76001
250924EN	2,4	79,09 58401	79,09 78401			
250924SN	2,4			79,09 38401	79,09 58401	79,09 78401
P		●	●	●	●	●
M			○			○
K		○		○	○	
N						
S						
H						
O						

9

CNMG

		-F30 CTCM120	-F30 CTPM125	-F30 CTCM130	-M30 CTCM120	-M30 CTPM125	-M30 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		F CNMG	F CNMG	F CNMG	M CNMG	M CNMG	M CNMG
		75 010 ...	75 010 ...	75 010 ...	75 011 ...	75 011 ...	75 011 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4	15,02 12800	15,02 280	15,02 32800			
120408EN	0,8	15,02 13000	15,02 230	15,02 33000	15,02 13000	15,02 230	15,02 33000
120412EN	1,2				15,02 13200	15,02 232	15,02 33200
120416EN	1,6				15,02 13400	15,02 234	15,02 33400
P		○	○	○	○	○	○
M		●	●	●	●	●	●
K							
N							
S				○			○
H							
O							

CNMG

		NEW	NEW				NEW
		-42 CTCM130	-M42 CTCM130	-M60 CTCM120	-M60 CTPM125	-M60 CTCM130	-M70 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		M CNMG	M CNMG	M CNMG	M CNMG	M CNMG	M CNMG
		75 030 ...	75 029 ...	75 012 ...	75 012 ...	75 012 ...	75 037 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4		15,02 32800				
120408EN	0,8	15,02 33000	15,02 33000	15,02 13000	15,02 230	15,02 33000	15,02 33000
120412EN	1,2		15,02 33200	15,02 13200	15,02 232	15,02 33200	15,02 33200
120416EN	1,6			15,02 13400	15,02 234	15,02 33400	
160612EN	1,2			24,26 14400	24,26 24400	24,26 34400	24,26 34400
190612EN	1,2						34,26 35600
190616EN	1,6						34,26 35800
P		○	○	○	○	○	○
M		●	●	●	●	●	●
K							
N							
S		○	○			○	○
H							
O							

CNMG

		NEW		NEW
		-F34 CTPX710	-M34 CTPX710	-M42 CTPX710
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
				
		F CNMG	M CNMG	M CNMG
		75 299 ...	75 003 ...	75 007 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4	14,13 62800	14,13 62800	
120408EN	0,8	14,13 63000	14,13 63000	16,19 63000
120412EN	1,2	14,13 63200	14,13 63200	16,19 63200
120416EN	1,6		14,13 63400	
P		●	●	●
M		●	●	●
K				
N		○	○	○
S		●	●	●
H				
O				

CNGA

Designation	L mm	S mm	D1 mm	IC mm
CNGA 1204..	12,9	4,76	5,13	12,7



CNGA A

CNGA

▲ TCE(NOI) = Design and number of equipped cutting edge corners





ISO	RE mm	TCE (NOI)	LE mm	F DIAMOND CNGA 71 127 ... EUR Y0		F DIAMOND CNGA 71 127 ... EUR Y0	
120404FN	0,4	**A (1)**	6,3	81,00	**10001**	81,00	**20001**
120408FN	0,8	**A (1)**	6,0	81,00	**10101**	81,00	**20101**
120412FN	1,2	**A (1)**	5,7	81,00	**10201**	81,00	**20201**
P							
M							
K							
N					●		●
S							
H							
O					●		●

9

MaxiLock-D – DCLN 95° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

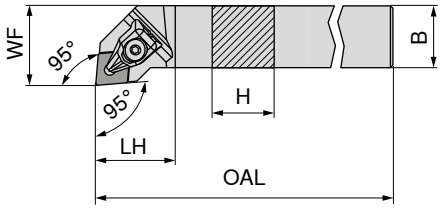

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 509 ... EUR 2A/24		Right-hand 70 508 ... EUR 2A/24	
DCLN R/L 1616 H09	16	16	100	23	20	2	CN.. 0903	96,54	**516**	96,54	**516**
DCLN R/L 2020 K09	20	20	125	24	25	2	CN.. 0903	107,60	**520**	107,60	**520**
DCLN R/L 2020 K12	20	20	125	32	25	4	CN.. 1204	107,60	**620**	107,60	**620**
DCLN R/L 2525 M12	25	25	150	32	32	4	CN.. 1204	111,30	**625**	111,30	**625**
DCLN R/L 3225 P12	32	25	170	32	32	4	CN.. 1204	119,40	**632**	119,40	**632**
DCLN R/L 2525 M16	25	25	150	38	32	6,5	CN.. 1606	111,30	**725**	111,30	**725**
DCLN R/L 3232 P16	32	32	170	36	40	6,5	CN.. 1606	150,30	**732**	150,30	**732**
DCLN R/L 3232 P19	32	32	170	42	40	6,5	CN.. 1906	150,30	**832**	150,30	**832**
DCLN R/L 4040 S19	40	40	250	42	50	6,5	CN.. 1906	186,80	**940**	186,80	**940**
DCLN R/L 4040 S25	40	40	250	60	50	6,5	CN.. 2509	186,80	**440**	186,80	**440**

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 508 516 / 70 509 516	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	9,19	**848**
70 508 520 / 70 509 520	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	9,19	**848**
70 508 620 / 70 509 620	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**
70 508 625 / 70 509 625	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**
70 508 632 / 70 509 632	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**
70 508 725 / 70 509 725	33,74	**825**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	15,53	**814**
70 508 732 / 70 509 732	33,74	**825**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	15,53	**814**
70 508 832 / 70 509 832	36,92	**826**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	16,64	**816**
70 508 940 / 70 509 940	36,92	**826**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	16,64	**816**
70 508 440 / 70 509 440	58,62	**827**	T25 - IP	13,25 **122**	M6x16 - IP	10,37 **822**	31,92	**625**

MaxiLock-D – DCBN 75° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

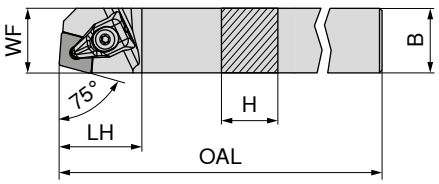

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 501 ... EUR 2A/24		Right-hand 70 500 ... EUR 2A/24	
DCBN R/L 2525 M12	25	25	150	32	22	4	CN.. 1204	107,60	**825**	107,60	**825**

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 501 825 / 70 500 825	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**

MaxiLock-D – DCKN 75° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

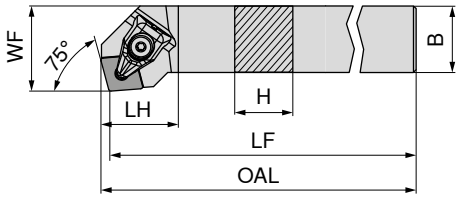

Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LF mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 505 ... EUR 2A/24		Right-hand 70 504 ... EUR 2A/24	
DCKN R/L 2525 M12	25	25	152,9	150	28,9	32	4	CN.. 1204	107,60	**825**	107,60	**825**

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	XPress type 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Carbide type C 70 950 ... EUR 2A/28	
70 505 825 / 70 504 825	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**

MaxiLock-N – PCLN 95° – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key

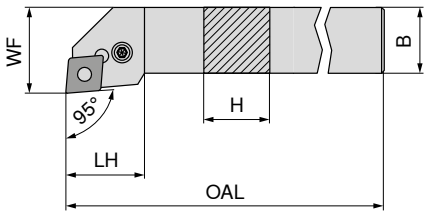

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 509 ... EUR 2A/24		Right-hand 70 508 ... EUR 2A/24	
PCLN R/L 1616 H12	16	16	100	26,2	20	4	CN.. 1204	96,54	**016**	96,54	**016**
PCLN R/L 2020 K12	20	20	125	27,5	25	4	CN.. 1204	107,60	**020**	107,60	**020**
PCLN R/L 2525 M12	25	25	150	28,1	32	4	CN.. 1204	111,30	**025**	111,30	**025**
PCLN R/L 3225 P12	32	25	170	28,1	32	4	CN.. 1204	119,40	**032**	119,40	**032**
PCLN R/L 2525 M16	25	25	150	32,7	32	4	CN.. 1606	111,30	**125**	111,30	**125**
PCLN R/L 3232 P16	32	32	170	32,6	40	4	CN.. 1606	150,30	**132**	150,30	**132**
PCLN R/L 3232 P19	32	32	170	38,0	40	8	CN.. 1906	150,30	**232**	150,30	**232**
PCLN R/L 4040 S19	40	40	250	38,0	50	8	CN.. 1906	186,80	**54000**	186,80	**54000**
PCLN R/L 4040 S25	40	40	250	50,0	50	8	CN.. 2509	186,80	**340**	186,80	**340**

Key I

Shim

Assembly pin

Lever

Clamping screw

Carbide type C

Spare parts for Article no.		Key I 70 950 ... EUR 2A/28		Shim 70 950 ... EUR 2A/28		Assembly pin 70 950 ... EUR 2A/28		Lever 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Carbide type C 70 950 ... EUR 2A/28	
70 508 016 / 70 509 016	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 508 020 / 70 509 020	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 508 025 / 70 509 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 508 032 / 70 509 032	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 508 125 / 70 509 125	SW3	3,15	**176**	1,45	**391**	1,57	**394**	16,08	**385**	4,89	**388**	16,08	**380**
70 508 132 / 70 509 132	SW3	3,15	**176**	1,45	**391**	1,57	**394**	16,08	**385**	4,89	**388**	16,08	**380**
70 508 232 / 70 509 232	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**381**
70 508 54000 / 70 509 54000	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**381**
70 508 340 / 70 509 340	SW5	4,75	**265**	1,45	**621**	2,43	**623**	33,31	**620**	2,93	**622**	31,92	**624**

MaxiLock-N – PCLN 95° DC – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key



Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	CNT	CRNT	torque moment	Insert	NEW Left-hand 70 592 ... EUR 2A/24		NEW Right-hand 70 592 ... EUR 2A/24	
	mm	mm	mm	mm	mm			Nm					
PCLN R/L 2020 X12-T DC	20	20	109	40	25	G1/8"	M6	4	CN.. 1204	214,80	**02000**	214,80	**02001**
PCLN R/L 2525 X12-T DC	25	25	124	40	32	G1/8"	M6	4	CN.. 1204	226,10	**02500**	226,10	**02501**
PCLN R/L 3225 X12-T DC	32	25	140	40	32	G1/8"	M6	4	CN.. 1204	237,40	**03200**	237,40	**03201**
PCLN R/L 2525 X16-T DC	25	25	129	45	32	G1/8"	M6	4	CN.. 1606	226,10	**12500**	226,10	**12501**
PCLN R/L 3232 X16-T DC	32	32	145	45	40	G1/8"	M6	4	CN.. 1606	248,70	**13200**	248,70	**13201**
PCLN R/L 3232 X19-T DC	32	32	150	50	40	G1/8"	M6	8	CN.. 1906	248,70	**23200**	248,70	**23201**
PCLN R/L 4040 X19-T DC	40	40	175	50	48	G1/8"	M6	8	CN.. 1906	271,30	**04000**	271,30	**04001**
PCLN R/L 4040 X25-T DC	40	40	185	60	48	G1/8"	M6	8	CN.. 2509	271,30	**14000**	271,30	**14001**

Key I

Shim

Assembly pin

Coolant screw plug

Lever

Clamping screw

Carbide type C

Grubscrew

Spare parts for Article no.	70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 592 02000 / 70 592 02001	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	10,17	**233**	3,84	**86700**
70 592 02500 / 70 592 02501	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	10,17	**233**	3,84	**86700**
70 592 03200 / 70 592 03201	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	10,17	**233**	3,84	**86700**
70 592 12500 / 70 592 12501	3,15	**176**	1,45	**391**	1,57	**394**	4,59	**294**	16,08	**385**	4,89	**388**	16,08	**380**	3,84	**86700**
70 592 13200 / 70 592 13201	3,15	**176**	1,45	**391**	1,57	**394**	4,59	**294**	16,08	**385**	4,89	**388**	16,08	**380**	3,84	**86700**
70 592 23200 / 70 592 23201	3,32	**396**	2,27	**392**	1,57	**395**	4,59	**294**	24,65	**386**	4,89	**389**	24,77	**381**	3,84	**86700**
70 592 04000 / 70 592 04001	3,32	**396**	2,27	**392**	1,57	**395**	4,59	**294**	24,65	**386**	4,89	**389**	24,77	**381**	3,84	**86700**
70 592 14000 / 70 592 14001	4,75	**265**	1,45	**621**	2,43	**623**	4,59	**294**	33,31	**620**	2,93	**622**	31,92	**624**	3,84	**86700**

MaxiLock-N – PCBN 75° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

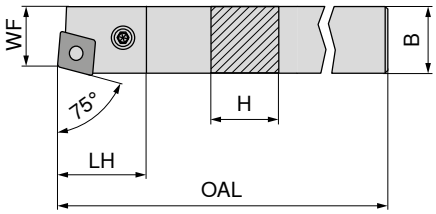

Illustrations show right-hand versions

ISO designation	H	B	OAL	LH	WF	torque moment	Insert	Left-hand 70 501 ... EUR 2A/24		Right-hand 70 500 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm					
PCBN R/L 2525 M12	25	25	150	27,70	22	4	CN.. 1204	107,60	**025**	107,60	**025**
PCBN R/L 2525 M16	25	25	150	31,81	22	4	CN.. 1606	107,60	**12500**	107,60	**125**
PCBN R/L 3232 P19	32	32	170	38,00	27	8	CN.. 1906	150,30	**032**	150,30	**032**

Key I

Shim

Assembly pin

Lever

Clamping screw

Carbide type C

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 500 025 / 70 501 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 500 125 / 70 501 12500	SW3	3,15	**176**	1,45	**391**	1,57	**394**	16,08	**385**	4,89	**388**	16,08	**380**
70 500 032 / 70 501 032	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**381**

MaxiLock-N – PCKN 75° – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key

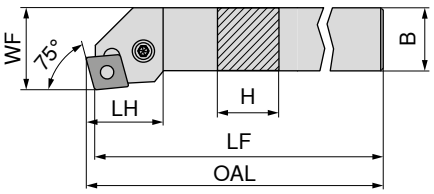

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LF mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand **70 505 ...** EUR 2A/24		Right-hand **70 504 ...** EUR 2A/24	
PCKN R/L 2525 M12	25	25	153,07	150	31,4	32	4	CN.. 1204	107,60	**025**	107,60	**025**

Key I

Shim

Assembly pin

Lever

Clamping screw

Carbide type C

Spare parts for Article no.		**70 950 ...** EUR 2A/28		**70 950 ...** EUR 2A/28		**70 950 ...** EUR 2A/28		**70 950 ...** EUR 2A/28		**70 950 ...** EUR 2A/28		**70 950 ...** EUR 2A/28	
70 505 025 / 70 504 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**

9

MaxiLock-D – DCLN 95° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 504 ... EUR 2D/80		Right-hand 74 503 ... EUR 2D/80	
HSK T63 DCLN R/L 12	HSK-T 63	70	42	53	45	100	4	CN.. 1204	289,80	**512**	289,80	**512**
HSK T63 DCLN R/L 16	HSK-T 63	70	42	53	45	125	4	CN.. 1606	289,80	**516**	289,80	**516**
HSK T63 DCLN R/L 19	HSK-T 63	70	42	53	45	125	8	CN.. 1906	289,80	**519**	289,80	**519**
HSK T100 DCLN R/L 12	HSK-T 100	80	45	88	55	125	4	CN.. 1204	340,10	**712**	340,10	**712**
HSK T100 DCLN R/L 19	HSK-T 100	80	45	88	55	125	8	CN.. 1906	340,10	**719**	340,10	**719**

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 504 512 / 74 503 512	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**810**
74 504 516 / 74 503 516	33,74	**825**	T20 - IP	16,17	**129**	M5x14 - IP	5,46	**821**	15,53	**814**
74 504 519 / 74 503 519	36,92	**826**	T20 - IP	16,17	**129**	M5x14 - IP	5,46	**821**	16,64	**816**
74 504 712 / 74 503 712	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**810**
74 504 719 / 74 503 719	36,92	**826**	T20 - IP	16,17	**129**	M5x14 - IP	5,46	**821**	16,64	**816**

MaxiLock-D – DCMN 95° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Neutral 74 506 ... EUR 2D/80	
HSK T63 DCMN N 12	HSK-T 63	115	53	0	4	CN.. 1204	397,30	**512**
HSK T100 DCMN N 12	HSK-T 100	150	88	0	4	CN.. 1204	467,30	**712**

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 506 512	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**810**
74 506 712	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**810**

MaxiLock-N – PCLN 95° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions



ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 657 ... EUR Y8		Right-hand 84 656 ... EUR Y8	
PSC40 PCLN R/L 50050-12	PSC 40	50	27	50	5	CN.. 1204	DC	281,60	**01295**	281,60	**01295**
PSC50 PCLN R/L 65060-12	PSC 50	60	35	65	5	CN.. 1204	DC	310,10	**01294**	310,10	**01294**
PSC63 PCLN R/L 80065-12	PSC 63	65	45	80	5	CN.. 1204	DC	352,00	**01293**	352,00	**01293**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Shim

Elbow lever screw

Lever

Carbide type C

Spare parts for Article no.	84 950 ... EUR Y8			84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8	
84 656 01295 / 84 657 01295	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	16,53	**29000**	16,43	**27800**
84 656 01294 / 84 657 01294	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	16,53	**29000**	16,43	**27800**
84 656 01293 / 84 657 01293	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	16,53	**29000**	16,43	**27800**

9

MaxiLock-N – PCMN 50° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



Neutral

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	84 675 ... EUR Y8	
PSC63 PCMN N 0100-12	PSC 63	100	5	CN.. 1204	DC	352,00	**01293**
PSC63 PCMN N 0130-12	PSC 63	130	5	CN.. 1204	DC	352,00	**11293**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Shim

Elbow lever screw

Lever

Carbide type C

Spare parts for Article no.	84 950 ... EUR Y8			84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8	
84 675 01293	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	16,53	**29000**	16,43	**27800**
84 675 11293	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	16,53	**29000**	16,43	**27800**

MaxiLock-D – DCLN 95° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key



Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 557 ... EUR 2A/24		Right-hand 70 556 ... EUR 2A/24	
A20Q DCLN R/L 09	20	19	180	35	13	25	2	CN.. 0903	252,20	**720**	252,20	**720**
A25R DCLN R/L 12	25	24	200	36	17	32	4	CN.. 1204	281,10	**825**	281,10	**825**
A32S DCLN R/L 12	32	31	250	40	22	40	4	CN.. 1204	290,60	**832**	290,60	**832**
A40T DCLN R/L 12	40	39	300	45	27	50	4	CN.. 1204	323,80	**840**	323,80	**840**
A40U DCLN L 16	50	47	350	45	35	63	6,5	CN.. 1606	400,70	**85000**		

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 556 720 / 70 557 720	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	9,19	**848**
70 556 825 / 70 557 825	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**		
70 556 832 / 70 557 832	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**
70 556 840 / 70 557 840	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**810**
70 557 85000	33,74	**825**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	15,53	**814**

MaxiLock-N – PCLN 95° – Boring bar with lever clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Boring bar with Allen key



Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 557 ... EUR 2A/24		Right-hand 70 556 ... EUR 2A/24	
A25R PCLN R/L 12	25	23	200	36,0	17	32	4	CN.. 1204	281,10	**225**	281,10	**225**
S25T PCLN R/L 12	25	23	300	22,0	17	32	4	CN.. 1204	281,10	**025**	281,10	**025**
A32S PCLN R/L 12	32	30	250	50,0	22	40	4	CN.. 1204	290,60	**232**	290,60	**232**
S32U PCLN R/L 12	32	30	350	24,1	22	40	4	CN.. 1204	290,60	**032**	290,60	**032**
A40T PCLN R/L 12	40	38	300	60,0	27	50	4	CN.. 1204	323,80	**240**	323,80	**240**
S40V PCLN R/L 12	40	38	400	24,1	27	50	4	CN.. 1204	323,80	**040**	323,80	**04000**[1)]
S50W PCLN R/L 16	50	47	450	31,0	35	63	4	CN.. 1606	400,70	**050**	400,70	**050**

1) nickel-plated

Key I

Shim

Assembly pin

Lever

Clamping screw

Carbide type C

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 556 225 / 70 557 225	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	5,52	**205**	10,17	**233**
70 556 025 / 70 557 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	5,52	**205**	10,17	**233**
70 556 232 / 70 557 232	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	5,52	**205**	10,17	**233**
70 556 032 / 70 557 032	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	5,52	**205**	10,17	**233**
70 556 240 / 70 557 240	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 556 04000 / 70 557 040	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	10,17	**233**
70 556 050 / 70 557 050	SW3	3,15	**176**	1,45	**391**	1,57	**394**	16,08	**385**	4,89	**388**	16,08	**380**

MaxiLock-D – DCLN 95° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	LH mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 529 ... EUR 2D/80		Right-hand 74 528 ... EUR 2D/80	
HSK T63 50Q DCLN R/L 12	HSK-T 63	175	149	50	35	63	4	CN.. 1204	397,30	**512**	397,30	**512**

XPress type

Key D

Clamping screw

Carbide type C

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 528 512 / 74 529 512	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**810**

9

DNMG / DNMA / DNMM

Designation	L	S	D1	IC
	mm	mm	mm	mm
DNMG 1104..	11,6	4,76	3,81	9,52
DNMG 1504..	15,5	4,76	5,16	12,70
DNM. 1506..	15,5	6,35	5,16	12,70



DNMG

		-CF TCM10	-CF20 CTEP110	-TFQ CTEP110	NEW -F50 CTCP115-P	NEW -F50 CTCP125-P	NEW -F50 CTCP135-P
			DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		F	F	F	F	F	F
		CERMET DNMG	CERMET DNMG	CERMET DNMG	DNMG	DNMG	DNMG
		70 155 ...	76 102 ...	76 153 ...	76 134 ...	76 134 ...	76 134 ...
ISO	RE mm	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08	EUR 1A/08
110402EN	0,2				16,02 30201	16,02 50201	16,02 70201
110404EN	0,4	15,29 904	16,02 004		16,02 30401	16,02 50401	16,02 70401
110408EN	0,8		16,02 006		16,02 30601	16,02 50601	16,02 70601
110412EN	1,2				16,02 30801	16,02 50801	16,02 70801
150404EN	0,4				19,41 31601	19,41 51601	19,41 71601
150408EN	0,8				19,41 31801	19,41 51801	19,41 71801
150412EN	1,2				19,41 32001	19,41 52001	19,41 72001
150604EN	0,4	20,01 914	21,03 028	23,38 028	21,03 32801	21,03 52801	21,03 72801
150608EN	0,8		21,03 030	23,38 030	21,03 33001	21,03 53001	21,03 73001
150612EN	1,2		21,03 032		21,03 33201	21,03 53201	21,03 73201
P		●	●	●	●	●	●
M		○	○	○			○
K		○	○	○	○	○	
N							
S							
H							
O							

DNMG

		NEW	NEW	NEW	NEW	NEW	NEW	
		-TFQ CTCP115-P	-TFQ CTCP125-P	-TFQ CTCP115-P	-TFQ CTCP125-P	-XU CTCP115-P	-XU CTCP125-P	-M50 CTCK110
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	M	M	M	M	M
		DNMG	DNMG	DNMG	DNMG	DNMG	DNMG	DNMG
		76 153 ...	76 153 ...	76 169 ...	76 169 ...	76 291 ...	76 291 ...	70 133 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
150408EN	0,8							19,41 018
150412EN	1,2							19,41 020
150604EN	0,4	24,26 32801	24,26 52801			21,03 32801	21,03 52801	
150608EN	0,8	24,26 33001	24,26 53001			21,03 33001	21,03 53001	21,03 030
150612EN	1,2			24,26 33201	24,26 53201	21,03 33201	21,03 53201	21,03 032
P		●	●	●	●	●	●	○
M								
K		○	○	○	○	○	○	●
N								
S								
H								
O								

DNMG

9

			NEW	NEW	NEW	NEW	NEW
		-M50 CTCK120	-M50 CTCP115-P	-M50 CTCP125-P	-M50 CTCP135-P	-TMQ CTCP125-P	-TMQ CTCP125-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		M	M	M	M	M	M
		DNMG	DNMG	DNMG	DNMG	DNMG	DNMG
		70 133 ...	76 136 ...	76 136 ...	76 136 ...	76 168 ...	76 197 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110404EN	0,4		16,02 30401	16,02 50401	16,02 70401		
110408EN	0,8		16,02 30601	16,02 50601	16,02 70601		
110412EN	1,2		16,02 30801	16,02 50801	16,02 70801		
150404EN	0,4		19,41 31601	19,41 51401	19,41 71601		
150408EN	0,8	19,41 518	19,41 31801	19,41 51801	19,41 71801		
150412EN	1,2	19,41 520	19,41 32001	19,41 51601	19,41 72001		
150416EN	1,6		19,41 32201	19,41 52201	19,41 72201		
150604EN	0,4		21,03 32801	21,03 52801	21,03 72801		
150608EN	0,8	21,03 530	21,03 33001	21,03 53001	21,03 73001	24,26 33001	24,26 53001
150612EN	1,2	21,03 532	21,03 33201	21,03 53201	21,03 73201	24,26 33201	24,26 53201
150616EN	1,6		21,03 33401	21,03 53401	21,03 73401		
P		○	●	●	●	●	●
M					○		
K		●	○	○		○	○
N							
S							
H							
O							

DNMG

					NEW		NEW		NEW	
		-M70 CTCK110		-M70 CTCK120		-M70 CTCP115-P		-M70 CTCP125-P		-M70 CTCP135-P	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
											
		M		M		M		M		M	
		DNMG		DNMG		DNMG		DNMG		DNMG	
		70 263 ...		70 263 ...		76 263 ...		76 263 ...		76 263 ...	
ISO	RE mm	EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08	
110408EN	0,8					16,02	30601	16,02	50601	16,02	70601
110412EN	1,2					16,02	30801	16,02	50801	16,02	70801
150408EN	0,8	19,41	018	19,41	518	19,41	31801	19,41	51801	19,41	71801
150412EN	1,2	19,41	020	19,41	520	19,41	32001	19,41	52001	19,41	72001
150416EN	1,6					19,41	32201	19,41	52201	19,41	72201
150608EN	0,8	21,03	030	21,03	530	21,03	33001	21,03	53001	21,03	73001
150612EN	1,2	21,03	032	21,03	532	21,03	33201	21,03	53201	21,03	73201
150616EN	1,6	21,03	034	21,03	534	21,03	33401	21,03	53401	21,03	73401
P		○		○		●		●		●	
M										○	
K		●		●		○		○			
N											
S											
H											
O											

DNMA / DNMM

						NEW		NEW		NEW		NEW		NEW	
		CTCK110		CTCK120		-R28 CTCP115-P		-R28 CTCP125-P		-R28 CTCP135-P		-R58 CTCP115-P		-R58 CTCP125-P	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
															
		R		R		R		R		R		R		R	
		DNMA		DNMA		DNMM		DNMM		DNMM		DNMM		DNMM	
		70 156 ...		70 156 ...		76 165 ...		76 165 ...		76 165 ...		76 166 ...		76 166 ...	
ISO	RE mm	EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08	
150408EN	0,8	19,41	018	19,41	518										
150412EN	1,2	19,41	020	19,41	520										
150608EN	0,8	21,03	030	21,03	530										
150612EN	1,2	21,03	032	21,03	532	21,03	33201	21,03	53201	21,03	73201	21,03	33201	21,03	53201
150616EN	1,6					21,03	33401	21,03	53401	21,03	73401	21,03	33401	21,03	53401
P		○		○		●		●		●		●		●	
M										○					
K		●		●		○		○				○		○	
N															
S															
H															
O															

DNMM / DNMG

		NEW						
		-R58 CTCP135-P	-F30 CTCM120	-F30 CTPM125	-F30 CTCM130	-M30 CTCM120	-M30 CTPM125	-M30 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		R	F	F	F	M	M	M
		DNMM	DNMG	DNMG	DNMG	DNMG	DNMG	DNMG
		76 166 ...	75 013 ...	75 013 ...	75 013 ...	75 014 ...	75 014 ...	75 014 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110404EN	0,4		16,02 10400	16,02 204	16,02 30400			
110408EN	0,8		16,02 10600	16,02 206	16,02 30600	16,02 10600	16,02 206	16,02 30600
110412EN	1,2					16,02 10800	16,02 208	16,02 30800
150404EN	0,4		19,41 11600		19,41 31600			
150408EN	0,8		19,41 11800		19,41 31800	19,41 11800		19,41 31800
150412EN	1,2					19,41 12000		19,41 32000
150604EN	0,4		21,03 12800	21,03 228	21,03 32800			
150608EN	0,8		21,03 13000	21,03 230	21,03 33000	21,03 13000	21,03 230	21,03 33000
150612EN	1,2	21,03 73201				21,03 13200	21,03 232	21,03 33200
150616EN	1,6	21,03 73401						
P		●	○	○	○	○	○	○
M		○	●	●	●	●	●	●
K								
N								
S					○			○
H								
O								

DNMG

		NEW	NEW		NEW	NEW		NEW
		-M42 CTCM130	-M60 CTCM120	-M60 CTPM125	-M60 CTCM130	-M70 CTCM130	-M34 CTPX710	-M42 CTPX710
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	M	M	M
		DNMG	DNMG	DNMG	DNMG	DNMG	DNMG	DNMG
		75 027 ...	75 015 ...	75 015 ...	75 015 ...	75 038 ...	75 004 ...	75 027 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110404EN	0,4	16,02 30400						
110408EN	0,8	16,02 30600				16,02 30600		
150404EN	0,4	19,41 31600					20,28 61600	
150408EN	0,8	19,41 31800	19,41 11800		19,41 31800		20,28 61800	
150412EN	1,2		19,41 12000		19,41 32000		20,28 62000	
150604EN	0,4	21,03 32800						
150608EN	0,8	21,03 33000	21,03 13000	21,03 230	21,03 33000		22,22 63000	24,26 63000
150612EN	1,2		21,03 13200	21,03 232	21,03 33200		22,22 63200	
P		○	○	○	○	○	●	●
M		●	●	●	●	●	●	●
K								
N							○	○
S		○			○	○	●	●
H								
O								

9

DNGA

Designation	L	S	D1	IC
	mm	mm	mm	mm
DNGA 1504..	15,5	4,76	5,16	12,7
DNGA 1506..	15,5	6,35	5,16	12,7



DNGA A

DNGA

▲ TCE(NOI) = Design and number of equipped cutting edge corners

CTDPD20



F

DIAMOND

DNGA

71 128 ...

ISO	RE	TCE (NOI)	LE	EUR	
	mm		mm	Y0	
150404FN	0,4	**A (1)**	6,4	81,00	**10001**
150408FN	0,8	**A (1)**	6,0	81,00	**10101**
150412FN	1,2	**A (1)**	5,6	81,00	**10201**
150604FN	0,4	**A (1)**	6,4	81,00	**10301**
150608FN	0,8	**A (1)**	6,0	81,00	**10401**
150612FN	1,2	**A (1)**	5,6	81,00	**10501**

P	
M	
K	
N	●
S	
H	
O	●

MaxiLock-D – DDJN 93° – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key

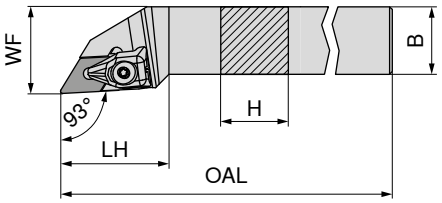

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 541 ... EUR 2A/24		Right-hand 70 540 ... EUR 2A/24	
DDJN R/L 1616 H11	16	16	100	33	20	2	DN.. 1104	96,54	**816**	96,54	**816**
DDJN R/L 2020 K11	20	20	125	33	25	2	DN.. 1104	107,60	**820**	107,60	**820**
DDJN R/L 2525 M11	25	25	150	33	32	2	DN.. 1104	111,30	**825**	111,30	**825**
DDJN R/L 2020 K15	20	20	125	40	25	4	DN.. 1504 / 1506	107,60	**720**	107,60	**720**
DDJN R/L 2525 M15	25	25	150	40	32	4	DN.. 1504 / 1506	111,30	**725**	111,30	**725**
DDJN R/L 3225 P15	32	25	170	40	32	4	DN.. 1504 / 1506	119,40	**832**	119,40	**832**

When using DN.. 1504 indexable inserts, use insert seat article no. **70 950 40000**.

XPress type

Key D

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 541 816 / 70 540 816	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	4,55	**808**
70 541 820 / 70 540 820	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	4,55	**808**
70 541 825 / 70 540 825	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	4,55	**808**
70 541 720 / 70 540 720	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**
70 541 725 / 70 540 725	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**
70 541 832 / 70 540 832	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**

MaxiLock-N – PDJN 93° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

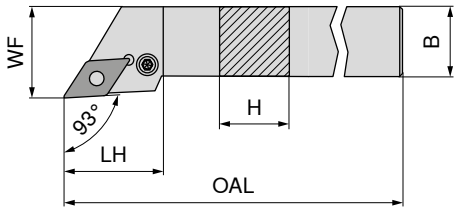

Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 541 ... EUR 2A/24		Right-hand 70 540 ... EUR 2A/24	
PDJN R/L 1616 H11	16	16	100	30,0	20	3	DN.. 1104	96,54	**116**	96,54	**116**
PDJN R/L 2020 K11	20	20	125	30,0	25	3	DN.. 1104	107,60	**12000**[1)]	107,60	**12000**[1)]
PDJN R/L 2525 M11	25	25	150	30,0	32	3	DN.. 1104	111,30	**12500**[1)]	111,30	**12500**[1)]
PDJN R/L 2020 K15	20	20	125	34,9	25	3,2	DN.. 1506	107,60	**020**	107,60	**020**
PDJN R/L 2525 M15	25	25	150	35,4	32	3,2	DN.. 1506	111,30	**025**	111,30	**025**
PDJN R/L 3225 P15	32	25	170	35,4	32	3,2	DN.. 1506	119,40	**032**	119,40	**032**
PDJN R/L 3232 P15	32	32	170	34,7	40	3,2	DN.. 1506	150,30	**13200**	150,30	**13200**

1) nickel-plated

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 540 116 / 70 541 116	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	19,30	**121**	4,12	**208**	9,28	**120**
70 540 12000 / 70 541 12000	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	19,30	**121**	4,12	**208**	9,28	**120**
70 540 12500 / 70 541 12500	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	19,30	**121**	4,12	**208**	9,28	**120**
70 540 020 / 70 541 020	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,89	**388**	10,17	**236**
70 540 025 / 70 541 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,89	**388**	10,17	**236**
70 540 032 / 70 541 032	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,89	**388**	10,17	**236**
70 540 13200 / 70 541 13200	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,89	**388**	10,17	**236**

MaxiLock-N – PDJN 93° DC – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key



Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	NEW Left-hand 70 593 ... EUR 2A/24		NEW Right-hand 70 593 ... EUR 2A/24	
	mm	mm	mm	mm	mm			Nm					
PDJN R/L 2020 X11-T DC	20	20	104	35	25	M6	G1/8"	3	DN.. 1104	214,80	**02000**	214,80	**02001**
PDJN R/L 2525 X11-T DC	25	25	114	45	32	M6	G1/8"	3	DN.. 1104	226,10	**02500**	226,10	**02501**
PDJN R/L 2020 X15-T DC	20	20	114	45	25	M6	G1/8"	3,2	DN.. 1506	214,80	**12000**	214,80	**12001**
PDJN R/L 2525 X15-T DC	25	25	129	45	32	M6	G1/8"	3,2	DN.. 1506	226,10	**12500**	226,10	**12501**
PDJN R/L 3225 X15-T DC	32	25	145	45	32	M6	G1/8"	3,2	DN.. 1506	237,40	**03200**	237,40	**03201**
PDJN R/L 3232 X15-T DC	32	32	145	45	40	M6	G1/8"	3,2	DN.. 1506	237,40	**13200**	237,40	**13201**

	Key I	Shim	Assembly pin	Coolant screw plug	Lever	Clamping screw	Solid Carbide Seat D	Grubscrew
	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 593 02001 / 70 593 02000	3,15 **175**	2,66 **122**	1,57 **191**	4,59 **294**	19,30 **121**	4,12 **208**	9,28 **120**	3,84 **86700**
70 593 02501 / 70 593 02500	3,15 **175**	2,66 **122**	1,57 **191**	4,59 **294**	19,30 **121**	4,12 **208**	9,28 **120**	3,84 **86700**
70 593 12001 / 70 593 12000	3,15 **176**	2,27 **198**	1,57 **192**	4,59 **294**	17,63 **188**	4,52 **209**	10,17 **236**	3,84 **86700**
70 593 12501 / 70 593 12500	3,15 **176**	2,27 **198**	1,57 **192**	4,59 **294**	17,63 **188**	4,52 **209**	10,17 **236**	3,84 **86700**
70 593 03201 / 70 593 03200	3,15 **176**	2,27 **198**	1,57 **192**	4,59 **294**	17,63 **188**	4,52 **209**	10,17 **236**	3,84 **86700**
70 593 13201 / 70 593 13200	3,15 **176**	2,27 **198**	1,57 **192**	4,59 **294**	17,63 **188**	4,52 **209**	10,17 **236**	3,84 **86700**

MaxiLock-N – PDNN 63° – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key

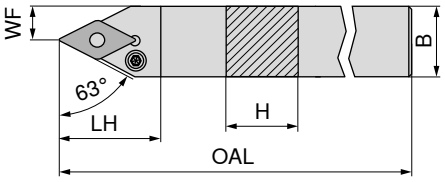

Illustrations show right-hand versions

ISO designation	H	B	OAL	LH	WF	torque moment	Insert	Left-hand 70 537 ... EUR 2A/24		Right-hand 70 536 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm					
PDNN R/L 2525 M11	25	25	150	30,0	12,5	3	DN.. 1104	111,30	**125**	111,30	**125**
PDNN R/L 2525 M15	25	25	150	36,5	12,5	3,2	DN.. 1506	111,30	**025**	111,30	**025**

		Key I	Shim	Assembly pin	Lever	Clamping screw	Solid Carbide Seat D
		70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.		EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 537 125 / 70 536 125	SW2,5	3,15 **175**	2,66 **122**	1,57 **191**	19,30 **121**	4,12 **208**	9,28 **120**
70 537 025 / 70 536 025	SW3	3,15 **176**	2,27 **198**	1,57 **192**	17,63 **188**	4,89 **388**	10,17 **236**

9

MaxiLock-N – PDNN 63° DC – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key

Direct Cooling



Illustrations show right-hand versions



										NEW Left-hand		NEW Right-hand	
										70 594 ...		70 594 ...	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
PDNN R/L 2525 X11-T DC	25	25	114	45	12,5	M6	G1/8"	3	DN.. 1104	226,10	**02500**	226,10	**02501**
PDNN R/L 2525 X15-T DC	25	25	119	50	12,5	M6	G1/8"	3,2	DN.. 1506	226,10	**12500**	226,10	**12501**

	Key I		Shim		Assembly pin		Coolant screw plug		Lever		Clamping screw		Solid Carbide Seat D		Grubscrew	
	70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...	
Spare parts for Article no.	EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 594 02501 / 70 594 02500	3,15	**175**	2,66	**122**	1,57	**191**	4,59	**294**	19,30	**121**	4,12	**208**	9,28	**120**	3,84	**86700**
70 594 12501 / 70 594 12500	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	17,63	**188**	4,52	**209**	10,17	**236**	3,84	**86700**

MaxiLock-D – DCMN + DDMN – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

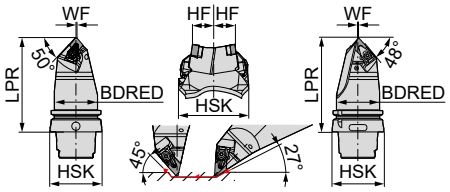

									Neutral 74 600 ...	
ISO designation	Adapter	LPR mm	BDRED mm	WF mm	HF mm	torque moment Nm	Insert		EUR 2D/80	
HSK T63 DCMN L 12 + DDMN L 15	HSK-T 63	115	53	0,5	20	4	CN.. 1204 / DN.. 1506		749,90	**501**
HSK T100 DCMN L 12 + DDMN L 15	HSK-T 100	150	88	0,5	20	4	CN.. 1204 / DN.. 1506		856,30	**701**

Face turning maximum 78 mm

	XPress type		Key D			Clamping screw		Solid Carbide Seat D		Carbide type C	
	70 950 ...		80 950 ...			70 950 ...		70 950 ...		70 950 ...	
Spare parts for Article no.	EUR 2A/28		EUR Y7			EUR 2A/28		EUR 2A/28		EUR 2A/28	
74 600 501	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**811**	10,17	**810**
74 600 701	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**811**	10,17	**810**

MaxiLock-D – DDUN 93° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 516 ... EUR 2D/80		Right-hand 74 515 ... EUR 2D/80	
HSK T63 DDUN R/L 15	HSK-T 63	70	42	53	45	125	4	DN.. 1506	289,80	**515**	289,80	**515**
HSK T100 DDUN R/L 15	HSK-T 100	80	45	88	55	125	4	DN.. 1506	340,10	**715**	340,10	**715**

XPress type

Key D

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 516 515 / 74 515 515	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**
74 516 715 / 74 515 715	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**

MaxiLock-D – DDJN 93° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 512 ... EUR 2D/80		Right-hand 74 511 ... EUR 2D/80	
HSK T63 DDJN R/L 15	HSK-T 63	75	42	53	45	125	4	DN.. 1506	289,80	**515**	289,80	**515**
HSK T100 DDJN R/L 15	HSK-T 100	85	45	88	55	125	4	DN.. 1506	340,10	**715**	340,10	**715**

XPress type

Key D

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 512 515 / 74 511 515	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**
74 512 715 / 74 511 715	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**811**

MaxiLock-D – DDHN 107.5° – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 508 ... EUR 2D/80		Right-hand 74 507 ... EUR 2D/80	
HSK T63 DDHN R/L 15	HSK-T 63	70	42	53	45	125	4	DN.. 1506	289,80	**515**	289,80	**515**

XPress type

Key D

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 508 515 / 74 507 515	30,06	**824**	T15 - IP 15,33	**128**	M4,5x12 - IP 3,84	**820**	10,17	**811**

MaxiLock-D – DDMN 48° – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key

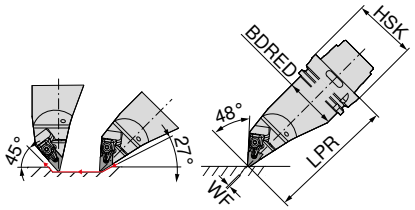

ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Left-hand 74 519 ... EUR 2D/80	
HSK T63 DDMN L 15	HSK-T 63	130	53	0	4	DN.. 1506	397,30	**515**
HSK T100 DDMN L 15	HSK-T 100	160	88	0	4	DN.. 1506	467,30	**715**

XPress type

Key D

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 519 515	30,06	**824**	15,33	**128**	3,84	**820**	10,17	**811**
74 519 715	30,06	**824**	15,33	**128**	3,84	**820**	10,17	**811**

MaxiLock-N – PDUN 93° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions



ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 661 ... EUR Y8	Right-hand 84 660 ... EUR Y8
PSC40 PDUN R/L 50050-15	PSC 40	50	27	50	5	DN.. 1504 / 1506	DC	281,60 **01595**	281,60 **01595**
PSC50 PDUN R/L 65060-15	PSC 50	60	35	65	5	DN.. 1504 / 1506	DC	310,10 **01594**	310,10 **01594**
PSC63 PDUN R/L 80065-15	PSC 63	65	45	80	5	DN.. 1504 / 1506	DC	352,00 **01593**	352,00 **01593**

Shim

Elbow lever screw

Lever

Solid Carbide Seat D

Spare parts	84 950 ... EUR Y8		84 950 ... EUR Y8	84 950 ... EUR Y8	84 950 ... EUR Y8
84 660 01593 / 84 661 01595	1,42 **29200**	M8X1/L17 SW3	5,58 **28700**	19,24 **28900**	30,22 **27900**

MaxiLock-N – PDJN 93° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions



ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 665 ... EUR Y8	Right-hand 84 664 ... EUR Y8
PSC40 PDJN R/L 50050-15	PSC 40	50	27	50	5	DN.. 1504 / 1506	DC	281,60 **01595**	281,60 **01595**
PSC50 PDJN R/L 65060-15	PSC 50	60	35	65	5	DN.. 1504 / 1506	DC	310,10 **01594**	310,10 **01594**
PSC63 PDJN R/L 80065-15	PSC 63	65	45	80	5	DN.. 1504 / 1506	DC	352,00 **01593**	352,00 **01593**

Shim

Elbow lever screw

Lever

Solid Carbide Seat D

Spare parts Adapter	84 950 ... EUR Y8		84 950 ... EUR Y8	84 950 ... EUR Y8	84 950 ... EUR Y8
PSC 40	1,42 **29200**	M8X1/L17 SW3	5,58 **28700**	19,24 **28900**	30,22 **27900**
PSC 50	1,42 **29200**	M8X1/L17 SW3	5,58 **28700**	19,24 **28900**	30,22 **27900**
PSC 63	1,42 **29200**	M8X1/L17 SW3	5,58 **28700**	19,24 **28900**	30,22 **27900**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

When using DN1504.. inserts Shim item no. **84 950 28200**

9

MaxiLock-N – PDHN 107,5° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions



ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 669 ... EUR Y8		Right-hand 84 668 ... EUR Y8	
PSC40 PDHN R/L 50050-15	PSC 40	50	27	50	5	DN.. 1504 / 1506	DC	281,60	**01595**	281,60	**01595**
PSC50 PDHN R/L 65060-15	PSC 50	60	35	65	5	DN.. 1504 / 1506	DC	310,10	**01594**	310,10	**01594**
PSC63 PDHN R/L 80065-15	PSC 63	65	45	80	5	DN.. 1504 / 1506	DC	352,00	**01593**	352,00	**01593**

Shim

Elbow lever screw

Lever

Solid Carbide Seat D

Spare parts for Article no.	84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8	
84 668 01595 / 84 669 01595	1,42	**29200**	5,58	**28700**	19,24	**28900**	30,22	**27900**
84 668 01594 / 84 669 01594	1,42	**29200**	5,58	**28700**	19,24	**28900**	30,22	**27900**
84 668 01593 / 84 669 01593	1,42	**29200**	5,58	**28700**	19,24	**28900**	30,22	**27900**

MaxiLock-N – PDNN 62,5° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	Neutral 84 676 ... EUR Y8	
PSC63 PDNN N 0100-15	PSC 63	100	5	DN.. 1504 / 1506	DC	352,00	**01593**
PSC63 PDNN N 0130-15	PSC 63	130	5	DN.. 1504 / 1506	DC	352,00	**11593**

Shim

Elbow lever screw

Lever

Solid Carbide Seat D

Spare parts for Article no.	84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8	
84 676 01593	1,42	**29200**	5,58	**28700**	19,24	**28900**	30,22	**27900**
84 676 11593	1,42	**29200**	5,58	**28700**	19,24	**28900**	30,22	**27900**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

When using DN1504.. inserts Shim item no. **84 950 28200**

MaxiLock-N – PDMN 48° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	Neutral 84 680 ... EUR Y8	
PSC63 PDMN L 0130-15	PSC 63	130	5	DN.. 1504 / 1506	DC	433,70	**11593**

	Shim	Elbow lever screw	Lever	Solid Carbide Seat D
	84 950 ...	**84 950 ...**	**84 950 ...**	**84 950 ...**
Spare parts for Article no.	**EUR Y8**	**EUR Y8**	**EUR Y8**	**EUR Y8**
84 680 11593	1,42 **29200**	5,58 **28700**	19,24 **28900**	30,22 **27900**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

When using DN1504.. inserts Shim item no. **84 950 28200**

9

Toolholder DCMN – DDMN 50°/48°







Neutral

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	84 683 ... EUR Y8	
PSC63 DCMN-DDMN L 0130-12/15	PSC 63	130	10	CN.. 1204 / DN.. 1506	551,00	**01293**

	Clamping Screw	Clamping claw	Ring-shaped nozzle	Clamping screw	Solid Carbide Seat D	Carbide type C
	84 950 ...	**84 950 ...**	**84 950 ...**	**84 950 ...**	**84 950 ...**	**84 950 ...**
Spare parts for Article no.	EUR Y8	EUR Y8	EUR Y8	EUR Y8	EUR Y8	EUR Y8
84 683 01293	25,14 **28300**	29,78 **28500**	9,59 **28400**	5,93 **27500**	30,22 **27900**	16,43 **27800**

High-performance coolant set

- ▲ Using the DC kit blocks the other coolant outlet so that all of the pressure is concentrated by the kit!
- ▲ Can be used up to 100 bar

Scope of supply:
Direct cooling nozzle and O-ring

	84 950 ... EUR Y8	
Coolant set	127,10	**27400**

MaxiLock-D – DDUN 93° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key

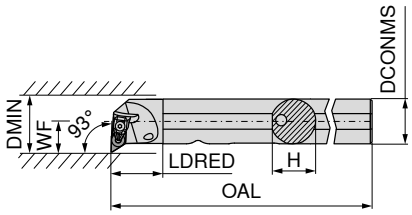

Illustrations show right-hand versions

									Left-hand		Right-hand	
									70 569 ...		**70 568 ...**	
ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	Nm		2A/24		2A/24	
A25R DDUN R/L 11	25	24	200	30	17	32	2	DN.. 1104	281,10	**725**	281,10	**725**
A32S DDUN R/L 11	32	31	250	40	22	40	2	DN.. 1104	290,60	**732**	290,60	**732**
A40T DDUN R/L 15	40	39	300	45	27	50	4	DN.. 1506	323,80	**840**	323,80	**840**

XPress type

70 950 ...

Key D

80 950 ...

Clamping screw

70 950 ...

Solid Carbide Seat D

70 950 ...

Spare parts for Article no.										
	EUR 2A/28			**EUR** Y7			**EUR** 2A/28		**EUR** 2A/28	
70 568 725 / 70 569 725	36,37	**835**	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**	4,55	**808**
70 568 732 / 70 569 732	36,37	**835**	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**	4,55	**808**
70 568 840 / 70 569 840	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**811**

9

MaxiLock-N – PDUN 93° – Boring bar with lever clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Boring bar with Allen key

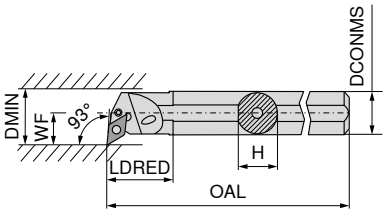

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 569 ... EUR 2A/24		Right-hand 70 568 ... EUR 2A/24	
A20Q PDUN R/L 11	20	18,5	180	36	16,0	28	3	DN.. 1104	252,20	**12000**[1]	252,20	**12000**[1]
A25R PDUN R/L 11	25	23,0	200	36	18,5	32	3	DN.. 1104	281,10	**125**	281,10	**12500**[1]
A32S PDUN R/L 11	32	30,0	250	36	22,0	40	3	DN.. 1104	290,60	**13200**[1]	290,60	**132**
A32S PDUN R/L 15	32	30,0	250	50	22,0	40	3,2	DN.. 1506	290,60	**232**	290,60	**232**
A40T PDUN R/L 15	40	38,0	300	60	27,0	50	3,2	DN.. 1506	323,80	**240**	323,80	**240**
S50W PDUN R/L 15	50	47,0	450	31	35,0	63	3,2	DN.. 1506	400,70	**050**	400,70	**050**

1) nickel-plated

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 568 12000 / 70 569 12000	SW2,5	3,15	**175**					19,30	**125**	2,80	**126**		
70 568 12500 / 70 569 125	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	19,30	**121**	4,12	**208**	9,28	**120**
70 568 132 / 70 569 13200	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	19,30	**121**	4,12	**208**	9,28	**120**
70 568 232 / 70 569 232	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,52	**209**	10,17	**236**
70 568 240 / 70 569 240	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,52	**209**	10,17	**236**
70 568 050 / 70 569 050	SW3	3,15	**176**	2,27	**198**	1,57	**192**	17,63	**188**	4,89	**388**	10,17	**236**

MaxiLock-D – DDUN 93° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	LH mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 533 ... EUR 2D/80		Right-hand 74 532 ... EUR 2D/80	
HSK T63 50Q DDUN R/L 15	HSK-T 63	175	149	50	35	63	4	DN.. 1506	397,30	**515**	397,30	**515**

XPress type

Key D

Clamping screw

Solid Carbide Seat D

Spare parts for Article no.		70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 533 515 / 74 532 515		30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**811**

SNMG / SNMA / SNMM

Designation	L	S	D1	IC
	mm	mm	mm	mm
SNMG 0903..	9,52	3,18	3,81	9,52
SNM. 1204..	12,70	4,76	5,16	12,70
SNM. 1506..	15,87	6,35	6,35	15,87
SNM. 1906..	19,05	6,35	7,94	19,05
SNMM 2507..	25,40	7,94	9,12	25,40
SNMM 2509..	25,40	9,52	9,12	25,40



SNMG

NEW

-F50 CTCP115-P	-F50 CTCP125-P	-F50 CTCP135-P	-M50 CTCP115-P	-M50 CTCP125-P	-M50 CTCP135-P
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
F	F	F	M	M	M
SNMG	SNMG	SNMG	SNMG	SNMG	SNMG
76 140 ...	76 140 ...	76 140 ...	76 137 ...	76 137 ...	76 137 ...

ISO	RE	EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08	
	mm												
090308EN	0,8	9,74	30601	9,74	50601	9,74	70601						
120404EN	0,4	15,29	31601	15,29	51601	15,29	71601						
120408EN	0,8	15,29	31801	15,29	51801	15,29	71801	15,29	31801	15,29	51801	15,29	71801
120412EN	1,2	15,29	32001	15,29	52001	15,29	72001	15,29	32001	15,29	52001	15,29	72001
120416EN	1,6							15,29	32201	15,29	52201	15,29	72201
150608EN	0,8							24,26	33001	24,26	53001	24,26	73001
150612EN	1,2							24,26	33201	24,26	53201	24,26	73201
150616EN	1,6							24,26	33401	24,26	53401	24,26	73401
P		●		●		●		●		●		●	
M						○						○	
K		○		○				○		○			
N													
S													
H													
O													

9

SNMG / SNMA

			NEW	NEW	NEW	NEW		
		-M70 CTCK110	-M70 CTCP115-P	-M70 CTCP125-P	-M70 CTCP135-P	-M70 CTCP125-P	-M70 CTCK120	CTCK110
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	R	M	R
		SNMG	SNMG	SNMG	SNMG	SNMG	SNMG	SNMA
		70 225 ...	76 225 ...	76 225 ...	76 225 ...	76 188 ...	70 225 ...	70 114 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120408EN	0,8	15,29 018	15,29 31801	15,29 51801	15,29 71801		15,29 518	15,29 018
120412EN	1,2	15,29 020	15,29 32001	15,29 52001	15,29 72001		15,29 520	15,29 020
120416EN	1,6	15,29 022	15,29 32201	15,29 52201	15,29 72201		15,29 522	15,29 022
150612EN	1,2	24,26 032	24,26 33201	24,26 53201	24,26 73201		24,26 532	24,26 032
150616EN	1,6	24,26 034	24,26 33401	24,26 53401	24,26 73401		24,26 534	24,26 034
190612EN	1,2	34,26 044	34,26 34401	34,26 54401	34,26 74401		34,26 544	34,26 044
190616EN	1,6	34,26 046	34,26 34601	34,26 54601	34,26 74601		34,26 546	34,26 046
190624EN	2,4		34,26 34801	34,26 54801	34,26 74801			
250924EN	2,4					79,09 57001		
P		○	●	●	●	●	○	○
M					○			
K		●	○	○		○	●	●
N								
S								
H								
O								

SNMA / SNMM

			NEW	NEW	NEW	NEW	NEW	NEW
		CTCK120	-R28 CTCP115-P	-R28 CTCP125-P	-R28 CTCP135-P	-R58 CTCP115-P	-R58 CTCP125-P	-R58 CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		R	R	R	R	R	R	R
		SNMA	SNMM	SNMM	SNMM	SNMM	SNMM	SNMM
		70 114 ...	76 128 ...	76 128 ...	76 128 ...	76 129 ...	76 129 ...	76 129 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120408EN	0,8	15,29 518				15,29 31801	15,29 51801	15,29 71801
120412EN	1,2	15,29 520				15,29 32001	15,29 52001	15,29 72001
120416EN	1,6	15,29 522						
150612EN	1,2	24,26 532	24,26 33201	24,26 53201	24,26 73201	24,26 33201	24,26 53201	24,26 73201
150616EN	1,6	24,26 534	24,26 33401	24,26 53401	24,26 73401	24,26 33401	24,26 53401	24,26 73401
190612EN	1,2	34,26 544				34,26 34401	34,26 54401	34,26 74401
190616EN	1,6	34,26 546	34,26 34601	34,26 54601	34,26 74601	34,26 34601	34,26 54601	34,26 74601
190624EN	2,4					34,26 34801	34,26 54801	34,26 74801
250724EN	2,4				67,34 76001	67,34 36001	67,34 56001	67,34 76001
250924EN	2,4		79,09 37001	79,09 57001	79,09 77001	79,09 37001	79,09 57001	79,09 77001
P		○	●	●	●	●	●	●
M					○			○
K		●	○	○		○	○	
N								
S								
H								
O								

SNMM

		NEW	NEW	NEW	NEW	NEW	NEW
		-R88 CTCP115-P	-R88 CTCP115-P	-R88 CTCP125-P	-R88 CTCP125-P	-R88 CTCP135-P	-R88 CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		R	R	R	R	R	R
		SNMM	SNMM	SNMM	SNMM	SNMM	SNMM
		76 130 ...	76 325 ...	76 130 ...	76 326 ...	76 130 ...	76 327 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
190616SN	1,6	34,26 34601		34,26 54601		34,26 74601	
190624SN	2,4	34,26 34801		34,26 54801		34,26 74801	
250724SN	2,4	67,34 36001		67,34 56001		67,34 76001	
250732SN	3,2		65,07 36101		65,07 56101		65,07 76101
250924SN	2,4	79,09 37001		79,09 57001		79,09 77001	
250932SN	3,2		76,43 37201		76,43 57201		76,43 77201
P		●	●	●	●	●	●
M						○	○
K		○	○	○	○		
N							
S							
H							
O							

9

SNMG

		-F30 CTCM120	-F30 CTPM125	-F30 CTCM130	-M30 CTCM120	-M30 CTPM125	-M30 CTPM125	-M30 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	M	M	M	M
		SNMG	SNMG	SNMG	SNMG	SNMG	SNMG	SNMG
		75 016 ...	75 016 ...	75 016 ...	75 017 ...	75 017 ...	75 016 ...	75 017 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120404EN	0,4	15,29 11600	15,29 216	15,29 31600				
120408EN	0,8	15,29 11800	15,29 218	15,29 31800	15,29 11800	15,29 218		15,29 31800
120412EN	1,2				15,29 12000		15,29 220	15,29 32000
P		○	○	○	○	○	○	○
M		●	●	●	●	●	●	●
K								
N								
S				○				○
H								
O								

SNMG

		NEW				NEW	
		-M42 CTCM130	-M60 CTCM120	-M60 CTPM125	-M60 CTCM130	-M70 CTCM130	-M34 CTPX710
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		M	M	M	M	M	M
		SNMG	SNMG	SNMG	SNMG	SNMG	SNMG
		75 034 ...	75 018 ...	75 018 ...	75 018 ...	75 039 ...	75 005 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
120408EN	0,8	15,29 31800	15,29 11800	15,29 218	15,29 31800	15,29 31800	16,02 61800
120412EN	1,2	15,29 32000	15,29 12000	15,29 210	15,29 32000	15,29 32000	16,02 62000
120416EN	1,6		15,29 12200	15,29 220	15,29 32200		
190616EN	1,6					34,26 34600	
P		○	○	○	○	○	●
M		●	●	●	●	●	●
K							
N							○
S		○			○	○	●
H							
O							

MaxiLock-D – DSDN 45° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

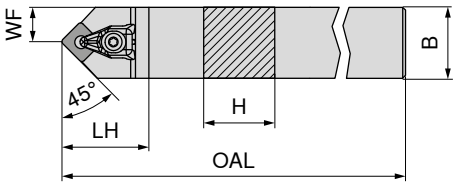

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Neutral 70 516 ... EUR 2A/24	
DSDN N 2020 K12	20	20	125	38	10,3	4	SN.. 1204	107,60	**620**
DSDN N 2525 M12	25	25	150	38	12,5	4	SN.. 1204	111,30	**625**

XPress type

Key D

Clamping screw

Solid Carbide support S

Spare parts for Article no.	70 950 ... EUR 2A/28			80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 516 620	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**
70 516 625	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**

MaxiLock-D – DSSN 45° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

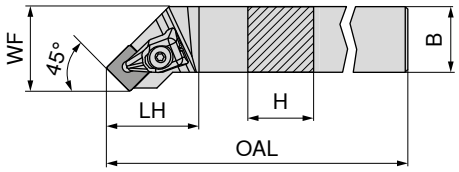

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 513 ... EUR 2A/24		Right-hand 70 512 ... EUR 2A/24	
DSSN R/L 2020 K12	20	20	125	35	25	4	SN.. 1204	107,60	**620**	107,60	**620**
DSSN R/L 2525 M12	25	25	150	35	32	4	SN.. 1204	111,30	**625**	111,30	**625**
DSSN R/L 3225 P12	32	25	170	35	32	4	SN.. 1204	119,40	**632**	119,40	**632**

XPress type

Key D

Clamping screw

Solid Carbide support S

Spare parts for Article no.	70 950 ... EUR 2A/28			80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 512 620 / 70 513 620	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**
70 512 625 / 70 513 625	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**
70 512 632 / 70 513 632	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**

MaxiLock-D – DSKN 75° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

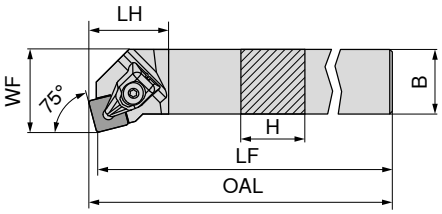

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LF mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 525 ... EUR 2A/24		Right-hand 70 524 ... EUR 2A/24	
DSKN R/L 2525 M12	25	25	153,3	150	28	32	4	SN.. 1204	111,30	**625**	111,30	**625**

XPress type

Key D

Clamping screw

Solid Carbide support S

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 525 625 / 70 524 625	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**813**

MaxiLock-D – DSBN 75° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

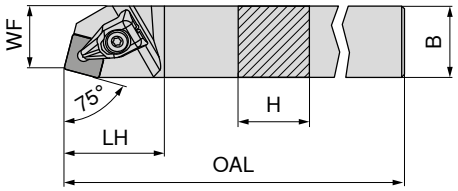

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Right-hand 70 520 ... EUR 2A/24	
DSBN R 2020 K12	20	20	125	35	17	4	SN.. 1204	107,60	**620**
DSBN R 2525 M12	25	25	150	35	22	4	SN.. 1204	111,30	**625**
DSBN R 2525 M15	25	25	150	42	22	6,5	SN.. 1506	111,30	**725**
DSBN R 3232 P15	32	32	170	42	27	6,5	SN.. 1506	150,30	**832**
DSBN R 3232 P19	32	32	170	48	27	6,5	SN.. 1906	150,30	**732**
DSBN R 4040 S19	40	40	250	48	35	6,5	SN.. 1906	186,80	**840**
DSBN R 4040 S25	40	40	250	57	35	6,5	SN.. 2507 / SN.. 2509	186,80	**940**

When using SN.. 2509 indexable inserts, use insert seat article no. 70 950 40100.

XPress type

Key D

Clamping screw

Solid Carbide support S

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 520 620	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**813**
70 520 625	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	10,17	**813**
70 520 725	33,74	**825**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	15,53	**833**
70 520 832	33,74	**825**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	15,53	**833**
70 520 732	36,92	**826**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	16,64	**817**
70 520 840	36,92	**826**	T20 - IP	16,17 **129**	M5x14 - IP	5,46 **821**	16,64	**817**
70 520 940	58,62	**827**	T25 - IP	13,25 **122**	M6x16 - IP	10,37 **822**	31,08	**818**

MaxiLock-N – PSDN 45° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

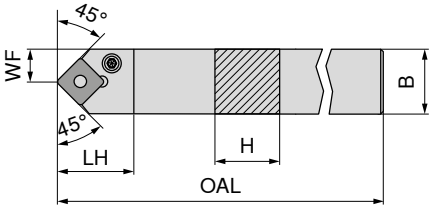



ISO designation	H	B	OAL	LH	WF	torque moment	Insert	Neutral 70 516 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm			
PSDN N 2020 K12	20	20	125	27,6	10,3	4	SNM. 1204	107,60	**020**
PSDN N 2525 M12	25	25	150	27,6	12,8	4	SNM. 1204	111,30	**025**
PSDN N 3225 P19	32	25	170	40,4	12,5	8	SNM. 1906	119,40	**03200**
PSDN N 4040 S25	40	40	250	48,8	20,0	8	SNM. 2507 / 2509	186,80	**04000**

When using SN.. 2509 indexable inserts, use insert seat article no. 70 950 40200.

		Key I		Shim		Assembly pin		Lever		Clamping screw		Solid Carbide support S	
		70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...	
Spare parts for Article no.		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 516 020	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 516 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 516 03200	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**383**
70 516 04000	SW5	4,75	**265**	1,45	**621**	2,43	**623**	33,31	**620**	2,93	**622**	50,93	**27600**

MaxiLock-N – PSDN 45° DC – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key





NEW
Neutral

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	70 596 ... EUR 2A/24	
PSDN N 2020 X12-T DC	20	20	109	40	11,5	M6	G1/8"	4	SNM. 1204	214,80	**02000**
PSDN N 2525 X12-T DC	25	25	124	40	13,3	M6	G1/8"	4	SNM. 1204	226,10	**02500**
PSDN N 2525 X15-T DC	25	25	134	50	13,7	M6	G1/8"	4	SNM. 1506	226,10	**12500**
PSDN N 3225 X15-T DC	32	25	150	50	13,7	M6	G1/8"	4	SNM. 1506	237,40	**03200**
PSDN N 3225 X19-T DC	32	25	152	52	13,7	M6	G1/8"	8	SNM. 1906	237,40	**13200**
PSDN N 4040 X25-T DC	40	40	190	65	22,4	M6	G1/8"	8	SNM. 2507 / 2509	271,30	**04000**

When using SN.. 2509 indexable inserts, use insert seat article no. 70 950 40200.

	Key I	Shim	Assembly pin	Coolant screw plug	Lever	Clamping screw	Solid Carbide support S	Grubscrew
	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 596 02000	3,15 **176**	2,27 **198**	1,57 **192**	4,59 **294**	16,23 **187**	4,52 **209**	7,88 **230**	3,84 **86700**
70 596 02500	3,15 **176**	2,27 **198**	1,57 **192**	4,59 **294**	16,23 **187**	4,52 **209**	7,88 **230**	3,84 **86700**
70 596 12500	3,15 **176**	1,45 **391**	1,57 **394**	4,59 **294**	16,08 **385**	4,89 **388**	16,08 **382**	3,84 **86700**
70 596 03200	3,15 **176**	1,45 **391**	1,57 **394**	4,59 **294**	16,08 **385**	4,89 **388**	16,08 **382**	3,84 **86700**
70 596 13200	3,32 **396**	2,27 **392**	1,57 **395**	4,59 **294**	24,65 **386**	4,89 **389**	24,77 **383**	3,84 **86700**
70 596 04000	4,75 **265**	1,45 **621**	2,43 **623**	4,59 **294**	33,31 **620**	2,93 **622**	50,93 **27600**	3,84 **86700**

MaxiLock-N – PSSN 45° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

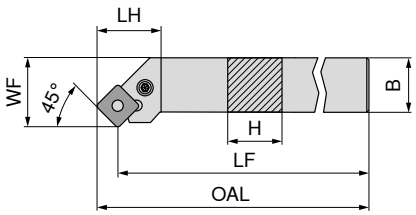

Illustrations show right-hand versions

ISO designation	H	B	OAL	LF	LH	WF	torque moment	Insert	Left-hand 70 513 ... EUR 2A/24		Right-hand 70 512 ... EUR 2A/24	
	mm	mm	mm	mm	mm	mm	Nm					
PSSN R/L 1616 H09	16	16	106,7	100	23,6	20	3	SNM. 0903	96,54	**016**	96,54	**01600**[1)]
PSSN R/L 2020 K12	20	20	134,0	125	27,3	25	4	SNM. 1204	107,60	**020**	107,60	**020**
PSSN R/L 2525 M12	25	25	159,0	150	29,3	32	4	SNM. 1204	111,30	**025**	111,30	**025**
PSSN R/L 3225 P12	32	25	179,0	170	29,3	32	4	SNM. 1204	119,40	**032**	119,40	**032**
PSSN R 2525 M15	25	25	161,2	150	32,5	32	4	SNM. 1506			111,30	**125**
PSSN R 3232 P15	32	32	181,2	170	38,9	40	4	SNM. 1506			150,30	**132**
PSSN R 3232 P19	32	32	183,5	170	41,2	40	8	SNM. 1906			150,30	**232**
PSSN L 3232 P19	32	32	183,5	170	40,2	40	8	SNM. 1906	150,30	**232**		
PSSN R 4040 S25	40	40	268,0	250	50,8	50	8	SNM. 2507 / 2509			183,30	**04000**

1) nickel-plated

When using SN.. 2509 indexable inserts, use insert seat article no. 70 950 40200.

Spare parts for Article no.		Key I 70 950 ... EUR 2A/28		Shim 70 950 ... EUR 2A/28		Assembly pin 70 950 ... EUR 2A/28		Lever 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide support S 70 950 ... EUR 2A/28	
70 512 01600 / 70 513 016	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	7,88	**229**
70 512 020 / 70 513 020	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 512 025 / 70 513 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 512 032 / 70 513 032	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 512 125	SW3	3,15	**176**	1,45	**391**	1,57	**394**	16,08	**385**	4,89	**388**	16,08	**382**
70 512 132	SW3	3,15	**176**	1,45	**391**	1,57	**394**	16,08	**385**	4,89	**388**	16,08	**382**
70 512 232	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**383**
70 513 232	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**383**
70 512 04000	SW5	4,75	**265**	1,45	**621**	2,43	**623**	33,31	**620**	2,93	**622**	50,93	**27600**

MaxiLock-N – PSSN 45° DC – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key



Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	NEW Left-hand 70 597 ... EUR 2A/24		NEW Right-hand 70 597 ... EUR 2A/24	
	mm	mm	mm	mm	mm			Nm					
PSSN R/L 2020 X12-T DC	20	20	111,9	42,9	25	M6	G1/8"	4	SNM. 1204	214,80	**02000**	214,80	**02001**
PSSN R/L 2525 X12-T DC	25	25	129,9	45,9	32	M6	G1/8"	4	SNM. 1204	226,10	**02500**	226,10	**02501**
PSSN R/L 3225 X12-T DC	32	25	145,9	45,9	32	M6	G1/8"	4	SNM. 1204	237,40	**03200**	237,40	**03201**
PSSN R 2525 X15-T DC	25	25	131,5	47,5	32	M6	G1/8"	4	SNM. 1506			226,10	**12501**
PSSN R 3232 X15-T DC	32	32	145,9	45,9	40	M6	G1/8"	4	SNM. 1506			248,70	**13201**
PSSN R/L 3232 X19-T DC	32	32	151,8	51,8	40	M6	G1/8"	8	SNM. 1906	248,70	**13200**	248,70	**23201**
PSSN R 4040 X25-T DC	40	40	189,6	64,6	50	M6	G1/8"	8	SNM. 2507 / 2509			271,30	**04001**

When using SN.. 2509 indexable inserts, use insert seat article no. 70 950 40200.

Key I

70 950 ...

Shim

70 950 ...

Assembly pin

70 950 ...

Coolant screw plug

70 950 ...

Lever

70 950 ...

Clamping screw

70 950 ...

Solid Carbide support S

70 950 ...

Grubscrew

70 950 ...

Spare parts for Article no.	EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 597 02001 / 70 597 02000	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	7,88	**230**	3,84	**86700**
70 597 02501 / 70 597 02500	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	7,88	**230**	3,84	**86700**
70 597 03201 / 70 597 03200	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	7,88	**230**	3,84	**86700**
70 597 12501	3,15	**176**	1,45	**391**	1,57	**394**	4,59	**294**	16,08	**385**	4,89	**388**	16,08	**382**	3,84	**86700**
70 597 13201	3,15	**176**	1,45	**391**	1,57	**394**	4,59	**294**	16,08	**385**	4,89	**388**	16,08	**382**	3,84	**86700**
70 597 23201 / 70 597 13200	3,32	**396**	2,27	**392**	1,57	**395**	4,59	**294**	24,65	**386**	4,89	**389**	24,77	**383**	3,84	**86700**
70 597 04001	4,75	**265**	1,45	**621**	2,43	**623**	4,59	**294**	33,31	**620**	2,93	**622**	50,93	**27600**	3,84	**86700**

MaxiLock-N – PSKN 75° – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key

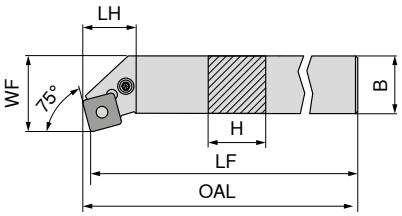

Illustrations show right-hand versions

ISO designation	H mm	LF mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 525 ... EUR 2A/24		Right-hand 70 524 ... EUR 2A/24	
PSKN R/L 1616 H09	16	100	16	102,5	18,7	20	3	SNM. 0903	96,54	**016**	96,54	**016**
PSKN R/L 2020 K12	20	125	20	128,3	24,1	25	4	SNM. 1204	107,60	**020**	107,60	**020**
PSKN R/L 2525 M12	25	150	25	153,3	24,1	32	4	SNM. 1204	111,30	**025**	111,30	**025**
PSKN R/L 3225 P12	32	170	25	173,1	24,1	32	4	SNM. 1204	119,40	**03200**	119,40	**03200**
PSKN R 4040 S19	40	250	40	254,6	38,3	50	8	SNM. 1906			186,80	**04000**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide support S

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 524 016 / 70 525 016	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	7,88	**229**
70 524 020 / 70 525 020	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 524 025 / 70 525 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 524 03200 / 70 525 03200	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**
70 524 04000	SW4	3,32	**396**	2,27	**392**	1,57	**395**	24,65	**386**	4,89	**389**	24,77	**383**

MaxiLock-D – DSDN 45° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Neutral 74 522 ... EUR 2D/80	
HSK T63 DSDN N 12	HSK-T 63	70	53	0	4	SN.. 1204	289,80	**512**
HSK T63 DSDN N 15	HSK-T 63	75	53	0	4	SN.. 1506	289,80	**515**
HSK T100 DSDN N 12	HSK-T 100	80	88	0	4	SN.. 1204	340,10	**712**
HSK T100 DSDN N 19	HSK-T 100	85	88	0	8	SN.. 1906	340,10	**719**

XPress type

Key D

Clamping screw

Solid Carbide support S

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 522 512	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**
74 522 515	33,74	**825**	T20 - IP	16,17	**129**	M5x14 - IP	5,46	**821**	15,53	**833**
74 522 712	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**
74 522 719	36,92	**826**	T20 - IP	16,17	**129**	M5x14 - IP	5,46	**821**	16,64	**817**

MaxiLock-D – DSKN 75° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key

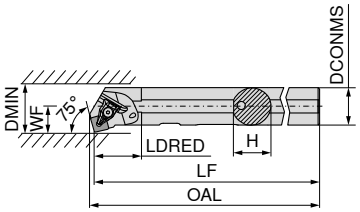

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	LF mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 561 ... EUR 2A/24		Right-hand 70 560 ... EUR 2A/24	
A32S DSKN R/L 12	32	31	250	254,2	40	22	40	4	SN.. 1204	290,60	**832**	290,60	**832**

XPress type

Key D

Clamping screw

Solid Carbide support S

Spare parts for Article no.		70 950 ... EUR 2A/28			80 950 ... EUR Y7			EUR 2A/28		EUR 2A/28	
70 560 832 / 70 561 832		30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	10,17	**813**

MaxiLock-N – PSKN 75° – Boring bar with lever clamping

Scope of supply:
Boring bar with Allen key

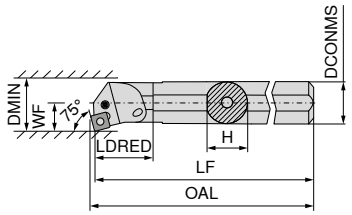

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	LF mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 561 ... EUR 2A/24		Right-hand 70 560 ... EUR 2A/24	
A25R PSKN R/L 12	25	23	200	203	36	17	32	4	SNM. 1204	281,10	**225**	281,10	**225**
A32S PSKN R/L 12	32	30	250	253	50	22	40	4	SNM. 1204	290,60	**232**	290,60	**232**
A40T PSKN R/L 12	40	38	300	303	60	27	50	4	SNM. 1204	323,80	**240**	323,80	**240**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide support S

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 561 225 / 70 560 225	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	5,52	**205**	7,88	**230**
70 561 232 / 70 560 232	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	5,52	**205**	7,88	**230**
70 561 240 / 70 560 240	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	7,88	**230**

TNMG / TNMA / TNMM

Designation	L	S	D1	IC
	mm	mm	mm	mm
TNMG 1103..	11,0	3,18	2,26	6,35
TNM. 1604..	16,5	4,76	3,81	9,52
TNM. 2204..	22,0	4,76	5,16	12,70



TNMG

			NEW	NEW	NEW	NEW	NEW	NEW
		-CF20 CTEP110	-F50 CTCP115-P	-F50 CTCP125-P	-F50 CTCP135-P	-M50 CTCP115-P	-M50 CTCP125-P	-M50 CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	M	M	M
		CERMET TNMG	TNMG	TNMG	TNMG	TNMG	TNMG	TNMG
		76 149 ...	76 146 ...	76 146 ...	76 146 ...	76 138 ...	76 138 ...	76 138 ...
ISO	RE mm	EUR 1A/78	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110304EN	0,4		8,46 30401	8,46 50401	8,46 70401			
110308EN	0,8		8,46 30601	8,46 50601	8,46 70601			
160404EN	0,4	13,29 016	13,40 31601	13,40 51601	13,40 71601	13,40 31601	13,40 51601	13,40 71601
160408EN	0,8	13,29 018	13,40 31801	13,40 51801	13,40 71801	13,40 31801	13,40 51801	13,40 71801
160412EN	1,2	13,29 020	13,40 32001	13,40 52001	13,40 72001	13,40 32001	13,40 52001	13,40 72001
220408EN	0,8					18,09 33001	18,09 53001	18,09 73001
220412EN	1,2					18,09 33201	18,09 53201	18,09 73201
P		●	●	●	●	●	●	●
M		○			○			○
K		○	○	○		○	○	
N								
S								
H								
O								

9

TNMG

				NEW		NEW		NEW		NEW		NEW			
		-M70 CTCK110		-M70 CTCK120		-M70 CTCP115-P		-M70 CTCP125-P		-M70 CTCP135-P		CTCP125-P		CTCP135-P	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
		M		M		M		M		M		M		M	
		TNMG		TNMG		TNMG		TNMG		TNMG		TNMG		TNMG	
		70 155 ...		70 155 ...		76 155 ...		76 155 ...		76 155 ...		76 142 ...		76 142 ...	
ISO	RE mm	EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08	
160404ER	0,4											13,40	51601	13,40	71601
160408EL	0,8											13,40	51801		
160408EN	0,8	13,40	018	13,40	518	13,40	31801	13,40	51801	13,40	71801				
160408ER	0,8											13,40	51701	13,40	71801
160412EN	1,2	13,40	020	13,40	520	13,40	32001	13,40	52001	13,40	72001				
220404EN	0,4							18,09	52801						
220408EN	0,8	18,09	030	18,09	530	18,09	33001	18,09	53001	18,09	73001				
220412EN	1,2	18,09	032	18,09	532	18,09	33201	18,09	53201	18,09	73201				
220416EN	1,6	18,09	034	18,09	534	18,09	33401	18,09	53401	18,09	73401				
P		○		○		●		●		●		●		●	
M										○				○	
K		●		●		○		○				○			
N															
S															
H															
O															

TNMA / TNMM

						NEW		NEW		NEW		NEW		NEW	
		CTCK110		CTCK120		-R28 CTCP115-P		-R28 CTCP125-P		-R28 CTCP135-P		-R58 CTCP115-P		-R58 CTCP125-P	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
		R		M		R		R		R		R		R	
		TNMA		TNMA		TNMM		TNMM		TNMM		TNMM		TNMM	
		70 134 ...		70 134 ...		76 154 ...		76 154 ...		76 154 ...		76 152 ...		76 152 ...	
ISO	RE mm	EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08		EUR 1A/08	
160408EN	0,8	13,40	018	13,40	518										
160412EN	1,2	13,40	020	13,40	520										
160416EN	1,6	13,40	022	13,40	522										
220408EN	0,8	18,09	030	18,09	530										
220412EN	1,2	18,09	032	18,09	532							18,09	33201	18,09	53201
220416EN	1,6	18,09	034	18,09	534	18,09	33401	18,09	53401	18,09	73401				
P		○		○		●		●		●		●		●	
M										○					
K		●		●		○		○				○		○	
N															
S															
H															
O															

TNMM / TNMG

ISO	RE mm	NEW -R58 CTCP135-P	-F30 CTCM120	-F30 CTPM125	-F30 CTCM130	-M30 CTCM120	-M30 CTPM125	-M30 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		R	F	F	F	M	M	M
		TNMM	TNMG	TNMG	TNMG	TNMG	TNMG	TNMG
		76 152 ...	75 019 ...	75 019 ...	75 019 ...	75 020 ...	75 020 ...	75 020 ...
		EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
160404EN	0,4		13,40 11600	13,40 216	13,40 31600			
160408EN	0,8		13,40 11800	13,40 218	13,40 31800	13,40 11800	13,40 218	13,40 31800
160412EN	1,2					13,40 12000	13,40 220	13,40 32000
220412EN	1,2	18,09 73201						
P		●	○	○	○	○	○	○
M		○	●	●	●	●	●	●
K								
N								
S					○			○
H								
O								

TNMG

9

ISO	RE mm	NEW -M42 CTCM130	-M60 CTCM120	-M60 CTPM125	-M60 CTCM130	NEW -M70 CTCM130	-M34 CTPX710
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		M	M	M	M	M	M
		TNMG	TNMG	TNMG	TNMG	TNMG	TNMG
		75 035 ...	75 021 ...	75 021 ...	75 021 ...	75 040 ...	75 006 ...
		EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
160404EN	0,4	13,40 31600					
160408EN	0,8	13,40 31800	13,40 11800	13,40 218	13,40 31800	13,40 31800	13,29 61800
160412EN	1,2		13,40 12000	13,40 220	13,40 32000	13,40 32000	
220404EN	0,4						19,11 62800
220408EN	0,8						19,11 63000
220412EN	1,2					18,09 33200	
220416EN	1,6						19,11 63400
P		○	○	○	○	○	●
M		●	●	●	●	●	●
K							
N							○
S		○			○	○	●
H							
O							

MaxiLock-D – DTJN 93° – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key

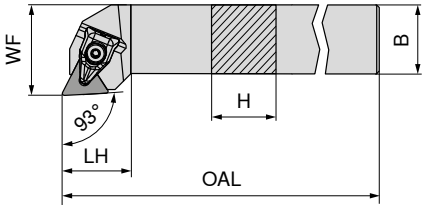

Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 591 ... EUR 2A/24		Right-hand 70 590 ... EUR 2A/24	
DTJN R/L 2020 K16	20	20	125	23	25	2	TNM. 1604	107,60	**820**	107,60	**820**
DTJN R/L 2525 M16	25	25	150	24	32	2	TNM. 1604	111,30	**825**	111,30	**825**

XPress type

Key D

Clamping screw

Solid Carbide Seat T

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 590 820 / 70 591 820	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	8,96	**847**
70 590 825 / 70 591 825	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	8,96	**847**

MaxiLock-N – PTTN 60° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

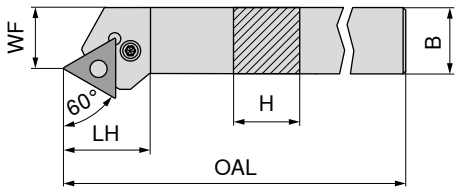

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 529 ... EUR 2A/24		Right-hand 70 528 ... EUR 2A/24	
PTTN R/L 2020 K16	20	20	125	25,9	17	3	TNM. 1604	107,60	**020**	107,60	**020**
PTTN R/L 2525 M22	25	25	150	32,7	22	4	TNM. 2204	111,30	**025**	111,30	**025**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide Seat T

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 529 020 / 70 528 020	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12 **208**	8,96 **225**
70 529 025 / 70 528 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52 **209**	12,81 **226**

MaxiLock-N – PTGN 91° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

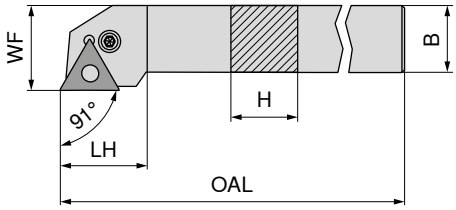

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 533 ... EUR 2A/24		Right-hand 70 532 ... EUR 2A/24	
PTGN R/L 1616 H16	16	16	100	20	20	3	TNM. 1604	96,54	**016**	96,54	**016**
PTGN R/L 2020 K16	20	20	125	20	25	3	TNM. 1604	107,60	**020**	107,60	**020**
PTGN R/L 2525 M16	25	25	150	22	32	3	TNM. 1604	111,30	**025**	111,30	**025**
PTGN R/L 3225 P16	32	25	170	22	32	3	TNM. 1604	119,40	**032**	119,40	**032**
PTGN R/L 2525 M22	25	25	150	29	32	4	TNM. 2204	111,30	**125**	111,30	**125**
PTGN R/L 3232 P22	32	32	170	29	40	4	TNM. 2204	150,30	**132**	150,30	**132**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide Seat T

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 532 016 / 70 533 016	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 532 020 / 70 533 020	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 532 025 / 70 533 025	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 532 032 / 70 533 032	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 532 125 / 70 533 125	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	12,81	**226**
70 532 132 / 70 533 132	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	12,81	**226**

MaxiLock-N – PTGN 91° DC – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key



Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	NEW Left-hand 70 598 ... EUR 2A/24		NEW Right-hand 70 598 ... EUR 2A/24	
	mm	mm	mm	mm	mm			Nm					
PTGN R/L 2020 X16-T DC	20	20	101	32	25	M6	G1/8"	3	TNM. 1604	214,80	**02000**	214,80	**02001**
PTGN R/L 2525 X16-T DC	25	25	119	35	32	M6	G1/8"	3	TNM. 1604	226,10	**02500**	226,10	**02501**
PTGN R/L 3225 X16-T DC	32	25	136	36	32	M6	G1/8"	3	TNM. 1604	237,40	**03200**	237,40	**03201**
PTGN R/L 2525 X22-T DC	25	25	122	38	32	M6	G1/8"	4	TNM. 2204	226,10	**12500**	226,10	**12501**
PTGN R/L 3232 X22-T DC	32	32	138	38	40	M6	G1/8"	4	TNM. 2204	248,70	**13200**	248,70	**13201**

Key I

Shim

Assembly pin

Coolant screw plug

Lever

Clamping screw

Solid Carbide Seat T

Grubscrew

Spare parts for Article no.	70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 598 02001 / 70 598 02000	3,15	**175**	2,27	**197**	1,57	**192**	4,59	**294**	16,08	**185**	4,12	**208**	8,96	**225**	3,84	**86700**
70 598 02501	3,15	**175**	2,27	**197**	1,57	**192**	4,59	**294**	16,08	**185**	4,12	**208**	8,96	**225**	3,84	**86700**
70 598 02500	3,15	**175**	2,27	**197**	1,57	**191**	4,59	**294**	16,08	**185**	4,12	**208**	8,96	**225**	3,84	**86700**
70 598 03201 / 70 598 03200	3,15	**175**	2,27	**197**	1,57	**192**	4,59	**294**	16,08	**185**	4,12	**208**	8,96	**225**	3,84	**86700**
70 598 12501 / 70 598 12500	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	12,81	**226**	3,84	**86700**
70 598 13201 / 70 598 13200	3,15	**176**	2,27	**198**	1,57	**192**	4,59	**294**	16,23	**187**	4,52	**209**	12,81	**226**	3,84	**86700**

MaxiLock-N – PTFN 90° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

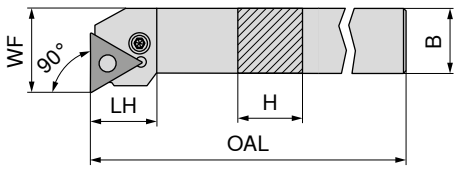

Illustrations show right-hand versions

ISO designation	H	B	OAL	LH	WF	torque moment	Insert	Left-hand 70 535 ... EUR 2A/24		Right-hand 70 534 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm					
PTFN R/L 1616 H16	16	16	100	19,7	20	3	TNM. 1604	96,54	**016**	96,54	**016**
PTFN R/L 2020 K16	20	20	125	20,2	25	3	TNM. 1604	107,60	**020**	107,60	**020**
PTFN R/L 2525 M16	25	25	150	20,2	32	3	TNM. 1604	111,30	**025**	111,30	**025**
PTFN R/L 2525 M22	25	25	150	25,2	32	4	TNM. 2204	111,30	**125**	111,30	**125**
PTFN R/L 3225 P22	32	25	170	25,2	32	4	TNM. 2204	119,40	**132**	119,40	**132**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide Seat T

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 534 016 / 70 535 016	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 534 020 / 70 535 020	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 534 025 / 70 535 025	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 534 125 / 70 535 125	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	12,81	**226**
70 534 132 / 70 535 132	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	12,81	**226**

MaxiLock-N – PTFN 90° – Boring bar with lever clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Boring bar with Allen key

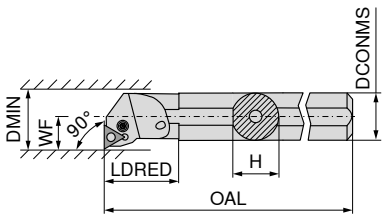

Illustrations show right-hand versions

									Left-hand		Right-hand	
									70 565 ...		**70 564 ...**	
ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	Nm		2A/24		2A/24	
S25T PTFN R 16	25	23	300	36	17	32	3	TNM. 1604			281,10	**02500**
A25R PTFN R/L 16	25	23	200	36	17	32	3	TNM. 1604	281,10	**225**	281,10	**225**
A32S PTFN R/L 16	32	30	250	50	22	40	3	TNM. 1604	290,60	**232**	290,60	**232**
A40T PTFN R/L 22	40	38	300	60	27	50	4	TNM. 2204	323,80	**240**	323,80	**240**
S50W PTFN R 22	50	47	450	35	35	63	4	TNM. 2204			400,70	**050**

	Key I		Shim		Assembly pin		Lever		Clamping screw		Solid Carbide Seat T	
	70 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.	**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28	
70 564 02500	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 564 225 / 70 565 225	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 564 232 / 70 565 232	3,15	**175**	2,27	**197**	1,57	**191**	16,08	**185**	4,12	**208**	8,96	**225**
70 564 240 / 70 565 240	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	12,81	**226**
70 564 050	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	12,81	**226**

VNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
VNMG 1604..	16,6	4,76	3,81	9,52



VNMG

	NEW	NEW	NEW	NEW	NEW	NEW	NEW
	-F40 CTCP125-P	-F50 CTCP115-P	-F50 CTCP125-P	-F50 CTCP135-P	-XU CTCP115-P	-XU CTCP125-P	-M40 CTCP125-P
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
	F VNMG	F VNMG	F VNMG	F VNMG	M VNMG	M VNMG	M VNMG
	76 000 ...	76 156 ...	76 156 ...	76 156 ...	76 294 ...	76 294 ...	76 001 ...
ISO RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
160404EN 0,4	27,06 51601	27,06 31601	27,06 51601	27,06 71601	26,99 31601	26,99 51601	27,06 51601
160408EN 0,8	27,06 51801	27,06 31801	27,06 51801	27,06 71801	26,99 31801	26,99 51801	27,06 51801
P	●	●	●	●	●	●	●
M				○			
K	○	○	○		○	○	○
N							
S							
H							
O							

VNMG

	NEW		NEW	NEW			
	-M50 CTCK110	-M50 CTCK120	-M50 CTCP115-P	-M50 CTCP125-P	-F30 CTCM120	-F30 CTPM125	-F30 CTCM130
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
	M VNMG	M VNMG	M VNMG	M VNMG	F VNMG	F VNMG	F VNMG
	70 190 ...	70 131 ...	76 131 ...	76 131 ...	75 022 ...	75 022 ...	75 022 ...
ISO RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
160404EN 0,4			27,06 31601	27,06 51601	27,06 11600	27,06 216	27,06 31600
160408EN 0,8		27,06 518	27,06 31801	27,06 51801	27,06 11800	27,06 218	27,06 31800
160412EN 1,2	27,06 01200	27,06 520	27,06 32001	27,06 52001			
P	○	○	●	●	○	○	○
M					●	●	●
K	●	●	○	○			
N							
S							○
H							
O							

VNMG

	-M30 CTCM120	-M30 CTPM125	-M30 CTCM130	-M34 CTPX710
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
				
	M	M	M	M
	VNMG	VNMG	VNMG	VNMG
	75 023 ...	75 023 ...	75 023 ...	75 009 ...
ISO / RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
160404EN 0,4				25,73 61600
160408EN 0,8	27,06 11800	27,06 218	27,06 31800	25,73 61800
160412EN 1,2				25,73 62000
P	○	○	○	●
M	●	●	●	●
K				
N				○
S			○	●
H				
O				

9

MaxiLock-D – DVJN 93° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

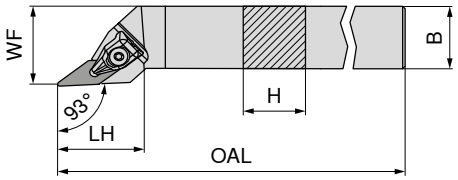

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 503 ... EUR 2A/24		Right-hand 70 502 ... EUR 2A/24	
DVJN R/L 2020 K16	20	20	125	39	25	2	VN.. 1604	123,80	**620**	123,80	**620**
DVJN R/L 2525 M16	25	25	150	39	32	2	VN.. 1604	131,30	**725**	131,30	**725**

XPress type

Key D

Clamping screw

Solid Carbide Seat V

Spare parts for Article no.	XPress type 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat V 70 950 ... EUR 2A/28	
70 502 620 / 70 503 620	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	7,22	**806**
70 502 725 / 70 503 725	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	7,22	**806**

MaxiLock-D – DVVN 72.5° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

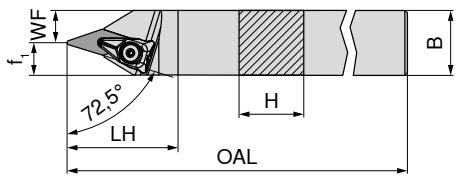

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	f_1 mm	torque moment Nm	Insert	Neutral 70 506 ... EUR 2A/24	
DVVN N 2020 K16	20	20	125	43	7,5	12,5	2	VN.. 1604	123,80	**620**
DVVN N 2525 M16	25	25	150	43	12,5	12,5	2	VN.. 1604	131,30	**625**

XPress type

Key D

Clamping screw

Solid Carbide Seat V

Spare parts for Article no.	XPress type 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat V 70 950 ... EUR 2A/28	
70 506 620	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	7,22	**806**
70 506 625	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	7,22	**806**

MaxiLock-D – DVMN 50° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

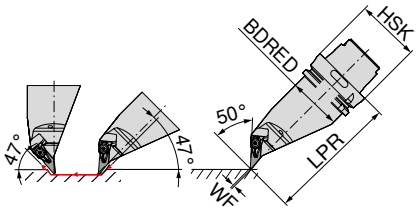

ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Left-hand 74 525 ... EUR 2D/80	
HSK T63 DVMN L 16	HSK-T 63	130	53	0	2	VN.. 1604	461,80	**516**
HSK T100 DVMN L 16	HSK-T 100	160	88	0	2	VN.. 1604	566,50	**716**

XPress type

Key D

Clamping screw

Solid Carbide Seat V

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 525 516	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	7,22	**806**
74 525 716	36,37	**835**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	7,22	**806**

MaxiLock-D – DVPN 117,5° – Toolholder with top clamping



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 84 673 ... EUR Y8		Right-hand 84 672 ... EUR Y8	
PSC40 DVPN R/L 50050-16	PSC 40	50	27	50	10	VN.. 1604	303,70	**01695**	303,70	**01695**
PSC50 DVPN R/L 65060-16	PSC 50	60	35	65	10	VN.. 1604	341,60	**01694**	341,60	**01694**
PSC63 DVPN R/L 80065-16	PSC 63	65	45	80	10	VN.. 1604	373,20	**01693**	373,20	**01693**

Clamping Screw

Clamping claw

Ring-shaped nozzle

Clamping screw

Solid Carbide Seat V

Spare parts for Article no.		84 950 ... EUR Y8		EUR Y8		EUR Y8		EUR Y8	
84 672 01695 / 84 673 01695	M6X28 SW4	25,14	**28300**	29,78	**28500**	9,59	**28400**	3,92 **27600**	30,22 **28000**
84 672 01694 / 84 673 01694	M6X28 SW4	25,14	**28300**	29,78	**28500**	9,59	**28400**	3,92 **27600**	30,22 **28000**
84 672 01693 / 84 673 01693	M6X28 SW4	25,14	**28300**	29,78	**28500**	9,59	**28400**	3,92 **27600**	30,22 **28000**

MaxiLock-D – DVVN 72,5° – Toolholder with top clamping





Neutral

84 679 ...

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	EUR Y8	
PSC63 DVVN N 0100-16	PSC 63	100	10	VN.. 1604	373,20	**01693**
PSC63 DVVN N 0130-16	PSC 63	130	10	VN.. 1604	373,20	**11693**

Clamping Screw

Clamping claw

Ring-shaped nozzle

Clamping screw

Solid Carbide Seat V

Spare parts for Article no.		**84 950 ...**	EUR Y8		EUR Y8		EUR Y8		EUR Y8		EUR Y8	
84 679 01693	M6X28 SW4		25,14	**28300**	29,78	**28500**	9,59	**28400**	3,92	**27600**	30,22	**28000**
84 679 11693	M6X28 SW4		25,14	**28300**	29,78	**28500**	9,59	**28400**	3,92	**27600**	30,22	**28000**

MaxiLock-D – DVMN 50° – Toolholder with top clamping





Neutral

84 682 ...

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	EUR Y8	
PSC63 DVMN L 0130-16	PSC 63	130	10	VN.. 1604	433,70	**01693**

Clamping Screw

Clamping claw

Ring-shaped nozzle

Clamping screw

Solid Carbide Seat V

Spare parts for Article no.		**84 950 ...**	EUR Y8		EUR Y8		EUR Y8		EUR Y8		EUR Y8	
84 682 01693	M6X28 SW4		25,14	**28300**	29,78	**28600**	9,59	**28400**	3,92	**27600**	30,22	**28000**

WNMG / WNMA

Designation	L	S	D1	IC
	mm	mm	mm	mm
WNMG 0604..	6,5	4,76	3,81	9,52
WNM. 0804..	8,6	4,76	5,16	12,70



WNMG

		NEW	NEW	NEW	NEW	NEW
		-CF20 CTEP110	-TFQ CTEP110	-F50 CTCP115-P	-F50 CTCP125-P	-F50 CTCP135-P	-TFQ CTCP115-P	-TFQ CTCP125-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	F
		CERMET	CERMET					
		WNMG	WNMG	WNMG	WNMG	WNMG	WNMG	WNMG
		76 171 ...	76 177 ...	76 157 ...	76 157 ...	76 157 ...	76 177 ...	76 177 ...
ISO	RE	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
	mm							
060404EN	0,4	12,73 004		13,08 30401	13,08 50401	13,08 70401	15,14 30401	15,14 51401
060408EN	0,8	12,73 006	15,14 006	13,08 30601	13,08 50601	13,08 70601	15,14 30601	15,14 50601
080404EN	0,4		18,95 016	16,47 31601	16,47 51601	16,47 71601		
080408EN	0,8	16,47 018	18,95 018	16,47 31801	16,47 51801	16,47 71801	18,95 31801	18,95 51801
080412EN	1,2			16,47 32001	16,47 52001	16,47 72001	18,95 32001	18,95 52001
P		●	●	●	●	●	●	●
M		○	○			○		
K		○	○	○	○		○	○
N								
S								
H								
O								

9

WNMG

		NEW	NEW			NEW	NEW	NEW
		-XU CTCP115-P	-XU CTCP125-P	-M50 CTCK110	-M50 CTCK120	-M50 CTCP115-P	-M50 CTCP125-P	-M50 CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	M	M	M
		WNMG	WNMG	WNMG	WNMG	WNMG	WNMG	WNMG
		76 295 ...	76 295 ...	70 139 ...	70 139 ...	76 139 ...	76 139 ...	76 139 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060404EN	0,4					13,08 30401	13,08 50401	13,08 70401
060408EN	0,8					13,08 30601	13,08 50601	13,08 70601
060412EN	1,2					13,08 30801	13,08 50801	13,08 70801
080404EN	0,4	16,49 31601	16,49 51601			16,47 31601	16,47 51601	16,47 71601
080408EN	0,8	16,49 31801	16,49 51801	16,47 018	16,47 518	16,47 31801	16,47 51801	16,47 71801
080412EN	1,2	16,49 32001	16,49 52001	16,47 020	16,47 520	16,47 32001	16,47 52001	16,47 72001
080416EN	1,6					16,47 32201	16,47 52201	16,47 72201
P		●	●	○	○	●	●	●
M								○
K		○	○	●	●	○	○	
N								
S								
H								
O								

WNMG

		NEW	NEW			NEW	NEW	NEW
		-TMQ CTCP115-P	-TMQ CTCP125-P	-M70 CTCK110	-M70 CTCK120	-M70 CTCP115-P	-M70 CTCP125-P	-M70 CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	M	M	M
		WNMG	WNMG	WNMG	WNMG	WNMG	WNMG	WNMG
		76 198 ...	76 198 ...	70 273 ...	70 273 ...	76 273 ...	76 273 ...	76 273 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060408EN	0,8					13,08 30601	13,08 50601	13,08 70601
060412EN	1,2					13,08 30801	13,08 50801	13,08 70801
080408EN	0,8	18,95 31801	18,95 51801	16,47 018	16,47 518	16,47 31801	16,47 51801	16,47 71801
080412EN	1,2	18,95 32001	18,95 52001	16,47 020	16,47 520	16,47 32001	16,47 52001	16,47 72001
080416EN	1,6			16,47 022	16,47 522	16,47 32201	16,47 52201	16,47 72201
P		●	●	○	○	●	●	●
M								○
K		○	○	●	●	○	○	
N								
S								
H								
O								

WNMA / WNMG

		CTCK110	CTCK120	-F30 CTCM120	-F30 CTPM125	-F30 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
		R	R	F	F	F
		WNMA	WNMA	WNMG	WNMG	WNMG
		70 169 ...	70 169 ...	75 024 ...	75 024 ...	75 024 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060404EN	0,4			13,08 10400	13,08 204	13,08 30400
060408EN	0,8			13,08 10600	13,08 206	13,08 30600
080404EN	0,4			16,47 11600	16,47 216	16,47 31600
080408EN	0,8	16,47 018	16,47 518	16,47 11800	16,47 218	16,47 31800
080412EN	1,2	16,47 020	16,47 520			
080416EN	1,6	16,47 022	16,47 522			
P		○	○	○	○	○
M				●	●	●
K		●	●			
N						
S						○
H						
O						

WNMG

9

NEW

		-M30 CTCM120	-M30 CTPM125	-M30 CTCM130	-M42 CTCM130	-M60 CTCM120	-M60 CTPM125	-M60 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	M	M	M
		WNMG	WNMG	WNMG	WNMG	WNMG	WNMG	WNMG
		75 025 ...	75 025 ...	75 025 ...	75 036 ...	75 026 ...	75 026 ...	75 026 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060404EN	0,4				13,08 30400			
060408EN	0,8	13,08 10600	13,08 206	13,08 30600	13,08 30600	13,08 10600	13,08 206	13,08 30600
060412EN	1,2	13,08 10800	13,08 208	13,08 30800		13,08 10800	13,08 208	13,08 30800
080404EN	0,4				16,47 31600			
080408EN	0,8	16,47 11800	16,47 218	16,47 31800	16,47 31800	16,47 11800	16,47 218	16,47 31800
080412EN	1,2	16,47 12000	16,47 220	16,47 32000	16,47 32000	16,47 12000	16,47 220	16,47 32000
P		○	○	○	○	○	○	○
M		●	●	●	●	●	●	●
K								
N								
S				○	○			○
H								
O								

WNMG

		NEW	NEW	
		-M70 CTCM130	-F34 CTPX710	-M34 CTPX710
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
				
		M	F	M
		WNMG	WNMG	WNMG
		75 041 ...	75 313 ...	75 008 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08
060408EN	0,8	13,08 30600		
080408EN	0,8	16,47 31800	16,76 61800	17,20 61800
080412EN	1,2	16,47 32000		17,20 62000
P		○	●	●
M		●	●	●
K				
N			○	○
S		○	●	●
H				
O				

MaxiLock-D – DWLN 95° – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key

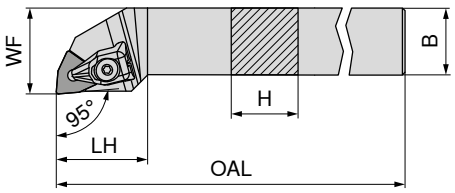

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 543 ... EUR 2A/24		Right-hand 70 542 ... EUR 2A/24	
DWLN R/L 1616 H06	16	16	100	25	20	2	WN.. 0604	96,54	**716**	96,54	**716**
DWLN R/L 2020 K06	20	20	125	27	25	2	WN.. 0604	107,60	**720**	107,60	**720**
DWLN R/L 2525 M06	25	25	150	27	32	2	WN.. 0604	111,30	**725**	111,30	**725**
DWLN R/L 2020 K08	20	20	125	34	25	4	WN.. 0804	107,60	**620**	107,60	**620**
DWLN R/L 2525 M08	25	25	150	34	32	4	WN.. 0804	111,30	**625**	111,30	**625**

Spare parts for Article no.	XPress type 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat W 70 950 ... EUR 2A/28	
70 543 716 / 70 542 716	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	4,38	**807**
70 543 720 / 70 542 720	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	4,38	**807**
70 543 725 / 70 542 725	30,48	**823**	T09 - IP	14,50 **126**	M3x7 - IP	4,14 **819**	4,38	**807**
70 543 620 / 70 542 620	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	12,81	**812**
70 543 625 / 70 542 625	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	12,81	**812**

9

MaxiLock-N – PWLN 95° – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key

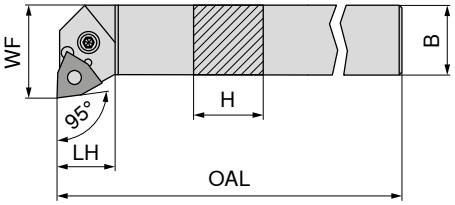

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 543 ... EUR 2A/24		Right-hand 70 542 ... EUR 2A/24	
PWLN R/L 1616 H06	16	16	100	20	22,5	3	WNMG 0604	96,54	**116**	96,54	**11600**[1)]
PWLN R/L 2020 K06	20	20	125	26	25,0	3	WNMG 0604	107,60	**12000**[1)]	107,60	**12000**[1)]
PWLN R/L 2525 M06	25	25	150	19	32,0	3	WNMG 0604	111,30	**125**	111,30	**12500**[1)]
PWLN R/L 2020 K08	20	20	125	22	25,0	4	WNMG 0804	107,60	**020**	107,60	**020**
PWLN R/L 2525 M08	25	25	150	22	32,0	4	WNMG 0804	111,30	**025**	111,30	**025**
PWLN R/L 3225 P08	32	25	170	22	32,0	4	WNMG 0804	119,40	**032**	119,40	**032**

1) nickel-plated

Spare parts for Article no.		Key I 70 950 ... EUR 2A/28		Shim 70 950 ... EUR 2A/28		Assembly pin 70 950 ... EUR 2A/28		Lever 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat W 70 950 ... EUR 2A/28	
70 542 11600 / 70 543 116	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	16,08	**185**	4,12	**208**	9,28	**127**
70 542 12000 / 70 543 12000	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	16,08	**185**	4,12	**208**	9,28	**127**
70 542 12500 / 70 543 125	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	16,08	**185**	4,12	**208**	9,28	**127**
70 542 020 / 70 543 020	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	11,24	**235**
70 542 025 / 70 543 025	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	11,24	**235**
70 542 032 / 70 543 032	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	11,24	**235**

MaxiLock-N – PWLN 95° DC – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key



Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	NEW Left-hand 70 599 ... EUR 2A/24		NEW Right-hand 70 599 ... EUR 2A/24	
	mm	mm	mm	mm	mm			Nm					
PWLN R/L 2020 X06-T DC	20	20	104	35	25	M6	G1/8"	3	WNMG 0604	214,80	**02000**	214,80	**02001**
PWLN R/L 2525 X06-T DC	25	25	120	35	32	M6	G1/8"	3	WNMG 0604	226,10	**02500**	226,10	**02501**
PWLN R/L 2020 X08-T DC	20	20	104	35	25	M6	G1/8"	4	WNMG 0804	214,80	**12000**	214,80	**12001**
PWLN R/L 2525 X08-T DC	25	25	120	35	32	M6	G1/8"	4	WNMG 0804	226,10	**12500**	226,10	**12501**
PWLN R/L 3225 X08-T DC	32	25	135	35	32	M6	G1/8"	4	WNMG 0804	237,40	**03200**	237,40	**03201**

Coolant screw plug

Lever

Clamping screw

Solid Carbide Seat W

Grubscrew

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
70 599 02001 / 70 599 02000	G 1/8"	4,59	**294**	16,08	**185**	4,12	**208**	9,28	**127**	M6x6	3,84	**86700**
70 599 02501 / 70 599 02500	G 1/8"	4,59	**294**	16,08	**185**	4,12	**208**	9,28	**127**	M6x6	3,84	**86700**
70 599 12001 / 70 599 12000	G 1/8"	4,59	**294**	16,23	**187**	4,52	**209**	11,24	**235**	M6x6	3,84	**86700**
70 599 12501 / 70 599 12500	G 1/8"	4,59	**294**	16,23	**187**	4,52	**209**	11,24	**235**	M6x6	3,84	**86700**
70 599 03201 / 70 599 03200	G 1/8"	4,59	**294**	16,23	**187**	4,52	**209**	11,24	**235**	M6x6	3,84	**86700**

Key I

Shim

Assembly pin

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 599 02001 / 70 599 02000	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**
70 599 02501 / 70 599 02500	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**
70 599 12001 / 70 599 12000	SW3	3,15	**176**	2,27	**198**	1,57	**192**
70 599 12501 / 70 599 12500	SW3	3,15	**176**	2,27	**198**	1,57	**192**
70 599 03201 / 70 599 03200	SW3	3,15	**176**	2,27	**198**	1,57	**192**

MaxiLock-D – DWLN 95° – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	Insert	Left-hand 74 529 ... EUR 2D/80		Right-hand 74 528 ... EUR 2D/80	
HSK T63 DWLN R/L 08	HSK-T 63	70	42,00	52,6	45	125	WN.. 0804	289,80	**508**	289,80	**508**
HSK T100 DWLN R 08	HSK-T 100	80	45,00	87,6	55	125	WN.. 0804			340,10	**708**
HSK T100 DWLN L 08	HSK-T 100	80	53,96	87,6	55	125	WN.. 0804	340,10	**708**		

XPress type

Key D

Clamping screw

Solid Carbide Seat W

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 528 508 / 74 529 508	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	12,81	**812**
74 528 708 / 74 529 708	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	12,81	**812**

MaxiLock-N – PWLN 95° – Toolholder with lever clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 653 ... EUR Y8		Right-hand 84 652 ... EUR Y8	
PSC40 PWLN R/L 50050-08	PSC 40	50	27	50	5	WN.. 0804	DC	281,60	**00895**	281,60	**00895**
PSC50 PWLN R/L 65060-08	PSC 50	60	35	65	5	WN.. 0804	DC	310,10	**00894**	310,10	**00894**
PSC63 PWLN R/L 80065-08	PSC 63	65	45	80	5	WN.. 0804	DC	352,00	**00893**	352,00	**00893**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Shim

Elbow lever screw

Lever

Solid Carbide Seat W

Spare parts for Article no.	84 950 ... EUR Y8			84 950 ... EUR Y8		84 950 ... EUR Y8		84 950 ... EUR Y8	
84 652 00895 / 84 653 00895	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	19,24	**28900**	30,22	**27700**
84 652 00894 / 84 653 00894	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	19,24	**28900**	30,22	**27700**
84 652 00893 / 84 653 00893	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	19,24	**28900**	30,22	**27700**

MaxiLock-D – DWLN 95° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key

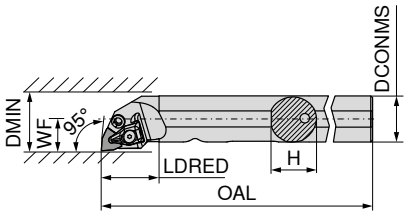

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 573 ... EUR 2A/24		Right-hand 70 572 ... EUR 2A/24	
A25R DWLN R/L 06	25	24	200	32	17	32	2	WN.. 0604	281,10	**725**	281,10	**725**
A32S DWLN R/L 08	32	31	250	40	22	44	4	WN.. 0804	290,60	**732**	290,60	**732**
A40T DWLN R/L 08	40	39	300	45	27	50	4	WN.. 0804	323,80	**64000**	323,80	**640**

XPress type

Key D

Clamping screw

Hydrant

Solid Carbide Seat W

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 572 725 / 70 573 725	30,48	**823**	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**	26,87	**834**	4,38	**807**
70 572 732 / 70 573 732	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	26,87	**834**	12,81	**812**
70 572 640 / 70 573 64000	30,06	**824**	T15 - IP	15,33	**128**	M4,5x12 - IP	3,84	**820**	26,87	**834**	12,81	**812**

MaxiLock-N – PWLN 95° – Boring bar with lever clamping

Scope of supply:
Boring bar with Allen key

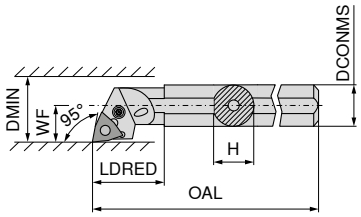

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 573 ... EUR 2A/24		Right-hand 70 572 ... EUR 2A/24	
A16M PWLN R/L 06	16	15	150	20	11	20	3	WNMG 0604	228,30	**11600**[1)]	228,30	**11600**[1)]
A20Q PWLN R/L 06-1	20	19	180	30	13	25	3	WNMG 0604	252,20	**12100**[1)]	252,20	**12100**[1)]
A25R PWLN R/L 06	25	23	200	25	17	32	3	WNMG 0604	281,10	**12500**[1)]	281,10	**12500**[1)]
A32S PWLN R/L 06	32	30	250	50	22	40	3	WNMG 0604	290,60	**132**	290,60	**132**
A25R PWLN R/L 08	25	23	200	40	17	31	4	WNMG 0804	281,20	**225**	281,20	**225**
A32S PWLN R/L 08	32	30	250	50	22	40	4	WNMG 0804	290,60	**032**	290,60	**032**
A40T PWLN R/L 08	40	39	300	60	27	50	4	WNMG 0804	323,80	**040**	323,80	**040**

1) nickel-plated

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid Carbide Seat W

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 572 11600 / 70 573 11600	SW2	3,15	**177**					19,30	**129**	5,46	**217**		
70 572 12100 / 70 573 12100	SW2	3,15	**177**					19,30	**129**	5,46	**217**		
70 572 12500 / 70 573 12500	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	16,08	**185**	4,12	**208**	9,28	**127**
70 572 132 / 70 573 132	SW2,5	3,15	**175**	2,66	**122**	1,57	**191**	16,08	**185**	4,12	**208**	9,28	**127**
70 572 225 / 70 573 225	SW3	3,15	**176**					16,23	**187**	5,52	**205**		
70 572 032 / 70 573 032	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	11,24	**235**
70 572 040 / 70 573 040	SW3	3,15	**176**	2,27	**198**	1,57	**192**	16,23	**187**	4,52	**209**	11,24	**235**

MaxiLock-D – DWLN 95° – Boring bar with top clamping

Scope of supply:
Boring bar with Torx key

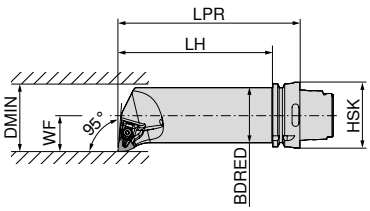

Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	LH mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 537 ... EUR 2D/80		Right-hand 74 536 ... EUR 2D/80	
HSK T63 50Q DWLN R/L 08	HSK-T 63	175	149	50	35	63	4	WN.. 0804	397,30	**508**	397,30	**508**

XPress type

Key D

Clamping screw

Solid Carbide Seat W

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 536 508 / 74 537 508	30,06	**824**	T15 - IP	15,33 **128**	M4,5x12 - IP	3,84 **820**	12,81	**812**

9

CCGT / CCMT / CCET

Designation	L	S	D1	IC
	mm	mm	mm	mm
CC.T 0602..	6,4	2,38	2,8	6,35
CC.T 09T3..	9,7	3,97	4,4	9,52
CC.T 1204..	12,9	4,76	5,5	12,70



CCGT / CCMT

		NEW	NEW
	-CF05 CTEP110	-CF55 CTEP110	-SF TCM407	-SF TCM10	-SMF TCM10	-SF CTCP125-P	-SF CTCP135-P
	DRAGONSKIN	DRAGONSKIN				DRAGONSKIN	DRAGONSKIN
							
	F	F	F	F	F	F	F
	CERMET CCGT	CERMET CCMT	CERMET CCGT	CERMET CCGT	CERMET CCMT	CCGT	CCGT
	76 247 ...	76 248 ...	70 251 ...	70 251 ...	70 249 ...	76 251 ...	76 251 ...
ISO / RE mm	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08
060202EN 0,2	18,22 002		17,64 850	17,64 900		18,22 50201	18,22 70201
060204EN 0,4	18,22 004	9,91 004	17,64 852	17,64 902	9,57 900		
09T302EN 0,2	19,41 014		18,22 854	18,22 904			
09T304EN 0,4	19,41 016	12,73 016		18,22 906	11,87 904		
09T308EN 0,8	19,41 018	12,73 018		18,22 908	11,87 906		
120404EN 0,4		17,96 028		22,80 910			
P	●	●	●	●	●	●	●
M	○	○	○	○	○		○
K	○	○	○	○	○	○	
N							
S							
H							
O							

CCMT / CCGT

		NEW	NEW	NEW	NEW	NEW	NEW	NEW
		-SF CTCP115-P	-SF CTCP125-P	-SF CTCP135-P	-SMF CTCP115-P	-SMF CTCP125-P	-SMF CTCP135-P	-SM CTCP125-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	M
		CCMT	CCMT	CCMT	CCMT	CCMT	CCMT	CCGT
		76 253 ...	76 253 ...	76 253 ...	76 249 ...	76 249 ...	76 249 ...	76 250 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060202EN	0,2							18,22 50201
060204EN	0,4	10,23 30401	10,23 50401	10,23 70401		10,23 50401	10,23 70401	
060208EN	0,8					10,23 50601		
09T304EN	0,4	12,76 31601	12,76 51601	12,76 71601	12,76 31601	12,76 51601	12,76 71601	
09T308EN	0,8	12,76 31801	12,76 51801		12,76 31801	12,76 51801		
120404EN	0,4		17,96 52801			17,96 52801		
120408EN	0,8		17,96 53001		17,96 33001		17,96 73001	
P		●	●	●	●	●	●	●
M				○			○	
K		○	○		○	○		○
N								
S								
H								
O								

9

CCGT / CCMT

		NEW			NEW	NEW	NEW	NEW
		-SM CTCP135-P	-SM CTCK110	-SM CTCK120	-SM CTCP115-P	-SM CTCP125-P	-SM CTCP135-P	-SMQ CTCP115-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	M	M	M	M	F
		CCGT	CCMT	CCMT	CCMT	CCMT	CCMT	CCMT
		76 250 ...	70 252 ...	70 252 ...	76 252 ...	76 252 ...	76 252 ...	76 194 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060202EN	0,2	18,22 70201						
060204EN	0,4		10,23 004	10,23 554	10,23 30401	10,23 50401	10,23 70401	
060208EN	0,8		10,23 006	10,23 506	10,23 30601		10,23 70601	
09T304EN	0,4		12,76 016	12,76 516	12,76 31601	12,76 51601	12,76 71601	14,34 31601
09T308EN	0,8		12,76 018	12,76 518	12,76 31801	12,76 51801	12,76 71801	14,34 31801
09T312EN	1,2		12,76 020	12,76 520				
120404EN	0,4		17,96 028	17,96 528	17,96 32801	17,96 52801	17,96 72801	20,15 32801
120408EN	0,8		17,96 030	17,96 530	17,96 33001	17,96 53001	17,96 73001	20,15 33001
120412EN	1,2					17,96 53201		
P		●	○	○	●	●	●	●
M		○					○	
K			●	●	○	○		○
N								
S								
H								
O								

CCMT

		NEW		NEW		NEW		NEW
		-SMQ CTCP125-P	-M25 CTCM120	-SF CTPM125	-M25 CTPM125	-F43 CTCM130	-M25 CTCM130	-SM CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	M
		CCMT	CCMT	CCMT	CCMT	CCMT	CCMT	CCMT
		76 194 ...	75 210 ...	75 042 ...	75 210 ...	75 031 ...	75 210 ...	75 047 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
060204EN	0,4		10,23 10400	10,23 20400	10,23 204		10,23 30400	10,23 30400
09T304EN	0,4	14,34 51601	12,76 11600	12,76 21600	12,76 216	12,76 31600	12,76 31600	12,76 31600
09T308EN	0,8	14,34 51801	12,76 11800		12,76 218	12,76 31800	12,76 31800	12,76 31800
120404EN	0,4	20,15 52801						17,96 32800
120408EN	0,8	20,15 53001						17,96 33000
P		●	○	○	○	○	○	○
M			●	●	●	●	●	●
K		○						
N								
S						○	○	○
H								
O								

CCMT / CCGT

		-M55 CTCM120	-M55 CTPM125	-M55 CTCM130	-23P H216T	-25P H210T	-25P CTPX710
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN			DRAGONSKIN
							
		M	M	M	F	F	M
		CCMT	CCMT	CCMT	CCGT	CCGT	CCGT
		75 211 ...	75 211 ...	75 211 ...	70 255 ...	70 248 ...	70 248 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/90	EUR 1A/90	EUR 1A/90
060202FN	0,2				14,34 652	14,34 636	17,06 70200
060204EN	0,4	10,23 10400	10,23 204	10,23 30400			
060204FN	0,4				14,34 654	14,34 638	17,06 70400
09T302FN	0,2					15,02 639	17,50 71400
09T304EN	0,4	12,76 11600	12,76 216	12,76 31600			
09T304FN	0,4				15,02 656	15,02 640	17,50 71600
09T308EN	0,8	12,76 11800	12,76 218	12,76 31800			
09T308FN	0,8				15,02 658	15,02 641	17,50 71800
120402FN	0,2					17,50 643	
120404EN	0,4	17,96 12800	17,96 228	17,96 32800			
120404FN	0,4					17,50 642	22,34 72800
120408EN	0,8	17,96 13000	17,96 230	17,96 33000			
120408FN	0,8					17,50 644	22,34 73000
P		○	○	○			●
M		●	●	●			●
K					○	○	
N					●	●	●
S				○		○	●
H							
O					○	○	

CCGT / CCMT / CCET

		-25Q H210T		-25Q CTPX710 DRAGONSKIN		-27 H10T		-27 CTPX715 DRAGONSKIN		-29 H216T		NEW -29 CTPX715 DRAGONSKIN		NEW -F05 CTPX710 DRAGONSKIN	
															
		M		M		M		M		M		M		F	
		CCGT		CCGT		CCGT		CCGT		CCMT		CCMT		CCET	
		70 248 ...		70 248 ...		70 254 ...		70 254 ...		70 245 ...		70 245 ...		76 243 ...	
ISO	RE mm	EUR 1A/90		EUR 1A/90		EUR 1A/90		EUR 1A/90		EUR 1A/90		EUR 1A/90		EUR 1A/08	
060201FN	0,1													24,44	10100
060202FN	0,2					13,43	600	16,33	80200					24,44	10200
060204EN	0,4									10,33	60400	12,36	70400		
060204FN	0,4	15,58	678	20,60	75400	13,43	602	16,33	80400					24,44	10400
09T302FN	0,2					14,34	604	16,76	81400						
09T304EN	0,4									11,01	61600	12,78	71600		
09T304FN	0,4	16,47	680	21,58	76600	14,34	606	16,76	81600						
09T308EN	0,8									11,01	61800	12,78	71800		
09T308FN	0,8	16,47	681	21,58	76800	14,34	608	16,76	81800						
09T316FN	1,6							19,80	72200						
120402FN	0,2					16,76	610	20,87	82600						
120404FN	0,4	19,41	682	24,28	77800	16,76	612	20,87	82800						
120408FN	0,8	19,41	686	24,28	78000	16,76	614	20,87	83000						
P				●				●				●		●	
M				●				●				●		●	
K		○				○		○		○		○			
N		●		●		●		●		●		●		●	
S		○		●				●				●		●	
H															
O		○				○		○		○		○			

9

CCGW / CCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CCG. 0602..	6,4	2,38	2,8	6,35
CCG. 09T3..	9,7	3,97	4,4	9,52
CCG. 1204..	12,9	4,76	5,5	12,70



CCGT A



CCGT A LL



CCGT A RR



CCGW A



CCGW A LL



CCGW A RR

CCGW / CCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDMD05		CTDPD20		CTDPD20		-Q CTDPD20		-Q CTDPD20	
				F		F		F		F		F	
				DIAMOND CCGW		DIAMOND CCGW		DIAMOND CCGT		DIAMOND CCGW		DIAMOND CCGT	
				71 120 ...		71 120 ...		71 124 ...		71 125 ...		71 126 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
060201FN	0,1	A (1)	3,4									72,00	101
060201FN	0,1	A (1)	3,5					64,00	10100				
060202FN	0,2	A (1)	2,5	377,00	050								
060202FN	0,2	A (1)	3,3							72,00	102	72,00	102
060202FN	0,2	A (1)	3,4			64,00	100	64,00	100				
060204FN	0,4	A (1)	2,5	377,00	052								
060204FN	0,4	A (1)	3,1									72,00	104
060204FN	0,4	A (1)	3,2			64,00	102	64,00	102	72,00	104		
060208FN	0,8	A (1)	2,5	377,00	05300								
060208FN	0,8	A (1)	3,0			64,00	10300	64,00	10300				
09T301FN	0,1	A (1)	4,5							82,00	111	82,00	111
09T302FN	0,2	A (1)	4,4							82,00	112	82,00	112
09T302FN	0,2	A (1)	4,5			74,00	10500	74,00	10500				
09T304FN	0,4	A (1)	2,5	377,00	054								
09T304FN	0,4	A (1)	4,2							82,00	114	82,00	114
09T304FN	0,4	A (1)	4,3			74,00	104	74,00	104				
09T308FN	0,8	A (1)	2,5	377,00	056								
09T308FN	0,8	A (1)	4,1			74,00	106	74,00	106				
120402FN	0,2	A (1)	4,4							92,94	122	89,00	122
120404FN	0,4	A (1)	4,2							92,94	124	89,00	124
120404FN	0,4	A (1)	4,3			81,00	108	76,00	108				
120408FN	0,8	A (1)	4,1			81,00	110	76,00	110				

P					
M					
K					
N	●	●	●	●	●
S					
H					
O	●	●	●	●	●

→ v_c Page 198+199

CCGW / CCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPD20		CTDPD20		-CB1 CTDPD20		-CB2 CTDPD20		-CB1 CTDPD20		-Q-CB2 CTDPD20	
															
				F		F		F		M		F		M	
				DIAMOND CCGW		DIAMOND CCGW		DIAMOND CCGT		DIAMOND CCGT		DIAMOND CCGT		DIAMOND CCGT	
				71 172 ...		71 172 ...		71 300 ...		71 168 ...		71 305 ...		71 169 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
060202FN	0,2	A (1)	3,40					72,00	102						
060204FN	0,4	A (1)	3,10									76,00	104		
060204FN	0,4	A (1)	3,20					72,00	104	72,00	10001				
060204FRR	0,4	A (1)	6,45			102,20	10101								
060204FLL	0,4	A (1)	6,45	102,20	10001										
060208FN	0,8	A (1)	3,00					72,00	10600						
09T302FN	0,2	A (1)	4,40											82,00	10001
09T302FN	0,2	A (1)	4,50					82,00	112						
09T304FN	0,4	A (1)	4,20									82,00	114	82,00	10101
09T304FN	0,4	A (1)	4,30					82,00	114						
09T308FN	0,8	A (1)	4,10					82,00	118						
09T308FRR	0,8	A (1)	9,70			108,80	10301								
09T308FLL	0,8	A (1)	9,70	108,80	10201										
09T312FLL	1,2	A (1)	9,70	108,80	10401										
120404FN	0,4	A (1)	4,20									89,00	124	89,00	10201
120404FN	0,4	A (1)	4,30					89,00	124						
120408FN	0,8	A (1)	4,10					89,00	128						
120412FRR	1,2	A (1)	12,90			120,40	10601								
120412FLL	1,2	A (1)	12,90	120,40	10501										
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

9

CCGT / CCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPS30	-Q CTDPS30	-Q CTDPS30	CTDPS30	CTDPS30	-CB2 CTDPS30
									
				F	F	F	F	F	M
				DIAMOND CCGT	DIAMOND CCGW	DIAMOND CCGT	DIAMOND CCGT	DIAMOND CCGT	DIAMOND CCGT
				71 166 ...	71 125 ...	71 126 ...	71 170 ...	71 170 ...	71 301 ...
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0	EUR Y0	EUR Y0	EUR Y0	EUR Y0	EUR Y0
060201FN	0,1	A (1)	3,50	64,00 20001					
060202FN	0,2	A (1)	3,30		72,00 152	72,00 152			
060202FN	0,2	A (1)	3,40	64,00 20101					72,00 202
060204FN	0,4	A (1)	3,20						72,00 204
060204FRR	0,4	A (1)	6,45					102,20 20101	
060204FLL	0,4	A (1)	6,45				102,20 20001		
060208FN	0,8	A (1)	3,00						72,00 208
060208FRR	0,8	A (1)	6,45					102,20 20301	
060208FLL	0,8	A (1)	6,45				102,20 20201		
09T301FN	0,1	A (1)	4,50		82,00 16300				
09T302FN	0,2	A (1)	4,40		82,00 162	82,00 162			
09T302FN	0,2	A (1)	4,50	74,00 20201					82,00 212
09T304FN	0,4	A (1)	4,30						82,00 214
09T308FN	0,8	A (1)	4,10						82,00 218
09T308FRR	0,8	A (1)	9,70					108,80 20501	
09T308FLL	0,8	A (1)	9,70				108,80 20401		
120402FN	0,2	A (1)	4,40			89,00 172			
120404FN	0,4	A (1)	4,20			89,00 174			
120404FN	0,4	A (1)	4,30	81,00 20301					89,00 224
120408FN	0,8	A (1)	4,10						89,00 228
120412FRR	1,2	A (1)	12,90					120,40 20701	
120412FLL	1,2	A (1)	12,90				120,40 20601		
P									
M									
K									
N				●	●	●	●	●	●
S									
H									
O				●	●	●	●	●	●

CCGT / CCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				-Q-CB2 CTDPS30		CTDPU20		-CB3 CTDPU20		CTDPS30	
											
				M		F		R		F	
				DIAMOND CCGT		DIAMOND CCGW		DIAMOND CCGT		DIAMOND CCGW	
				71 306 ...		71 171 ...		71 302 ...		71 171 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0	
060201FN	0,1	A (1)	3,5							64,00	20001
060202FN	0,2	A (1)	3,3	76,00	202						
060202FN	0,2	A (1)	3,4							64,00	20101
060204FN	0,4	A (1)	3,1	76,00	204						
060204FN	0,4	A (1)	3,2					72,00	204	64,00	20201
09T302FN	0,2	A (1)	4,4	82,00	212						
09T302FN	0,2	A (1)	4,5							74,00	20301
09T304FN	0,4	A (1)	4,2	82,00	214						
09T304FN	0,4	A (1)	4,3			74,00	30001	82,00	214	74,00	20401
09T308FN	0,8	A (1)	4,1			74,00	30101	82,00	218		
120402FN	0,2	A (1)	4,4	89,00	222						
120404FN	0,4	A (1)	4,2	89,00	224						
120404FN	0,4	A (1)	4,3							81,00	20501
P											
M											
K											
N					●		●		●		●
S											
H											
O					●		●		●		●

9

CCGW / CCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDCD10		-CB1 CTDCD10		-Q-CB1 CTDCD10		-CB2 CTDCD10		-Q-CB2 CTDCD10	
				F		F		F		M		M	
				DIAMOND CCGW		DIAMOND CCGT		DIAMOND CCGT		DIAMOND CCGT		DIAMOND CCGT	
				71 171 ...		71 300 ...		71 167 ...		71 301 ...		71 306 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
060202FN	0,2	A (1)	2,3					87,84	40001				
060202FN	0,2	A (1)	2,4	78,08	40001	87,84	302			87,84	30200		
060204FN	0,4	A (1)	2,1					87,84	40101			87,84	304
060204FN	0,4	A (1)	2,2	78,08	40101	87,84	304			87,84	304		
060208FN	0,8	A (1)	2,0			87,84	30600						
09T302FN	0,2	A (1)	2,3									100,00	31200
09T302FN	0,2	A (1)	2,4	90,28	40201					100,00	31200		
09T304FN	0,4	A (1)	2,1					100,00	40201			100,00	314
09T304FN	0,4	A (1)	2,2	90,28	40301	100,00	314			100,00	314		
09T308FN	0,8	A (1)	2,0	90,28	40401					100,00	31600		
120404FN	0,4	A (1)	2,1					113,40	40301			113,40	324
120404FN	0,4	A (1)	2,2							113,40	32600		
120408FN	0,8	A (1)	2,0	98,82	40501								
120408FN	0,8	A (1)	2,1							113,40	328		
P													
M													
K													
N				●		●		●		●		●	
S													
H													
O				●		●		●		●		●	

MaxiLock-S – SCLC 95° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

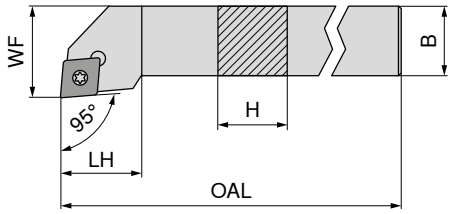



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 636 ... EUR 2A/24		NEW Right-hand 70 636 ... EUR 2A/24	
SCLC R/L 0808 D06	8	8	60	9	10	1,2	CC.. 0602	75,87	**00800**	75,87	**00801**
SCLC R/L 1010 E06	10	10	70	9	12	1,2	CC.. 0602	80,94	**01000**	80,94	**01001**
SCLC R/L 1212 F09	12	12	80	15	16	3,2	CC.. 09T3	80,94	**01200**	80,94	**01201**
SCLC R/L 1616 H09	16	16	100	17	20	3,2	CC.. 09T3	101,20	**01600**	101,20	**01601**
SCLC R/L 2020 K09	20	20	125	17	25	3,2	CC.. 09T3	107,20	**02000**	107,20	**02001**
SCLC R/L 1616 H12	16	16	100	20	20	5	CC.. 1204	101,20	**11600**	101,20	**11601**
SCLC R/L 2020 K12	20	20	125	20	25	5	CC.. 1204	107,20	**12000**	107,20	**12001**
SCLC R/L 2525 M12	25	25	150	20	32	5	CC.. 1204	111,30	**12500**	111,30	**12501**
SCLC R/L 3225 P12	32	25	170	20	32	5	CC.. 1204	116,40	**13200**	116,40	**13201**

Spare parts for Article no.	Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Carbide type C 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 636 00800 / 70 636 00801	8,11	**039**	5,38	**857**				
70 636 01000 / 70 636 01001	8,11	**039**	5,38	**857**				
70 636 01200 / 70 636 01201	11,79	**120**	4,82	**87900**				
70 636 01600 / 70 636 01601	11,79	**120**	4,82	**87900**				
70 636 02000 / 70 636 02001	11,79	**120**	4,82	**87900**				
70 636 11600 / 70 636 11601	11,79	**120**	3,84	**820**	15,94	**166**	5,98	**170**
70 636 12000 / 70 636 12001	11,79	**120**	3,84	**820**	15,94	**166**	5,98	**170**
70 636 12500 / 70 636 12501	11,79	**120**	3,84	**820**	15,94	**166**	5,98	**170**
70 636 13200 / 70 636 13201	11,79	**120**	3,84	**820**	15,94	**166**	5,98	**170**

9

MaxiLock-S – SCLC 95° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	NEW Left-hand 70 770 ... EUR 2A/24		NEW Right-hand 70 770 ... EUR 2A/24	
SCLC R/L 1010 E06 DC	10	10	70	14	12	M6	M6	1,2	CC.. 0602	171,30	**01001**	171,30	**01000**
SCLC R/L 1212 F09 DC	12	12	80	19	16	M6	M6	3,2	CC.. 09T3	171,30	**01201**	171,30	**01200**
SCLC R/L 1616 H09 DC	16	16	100	26	20	M6	G1/8"	3,2	CC.. 09T3	190,30	**11601**	190,30	**01600**
SCLC R/L 2020 K09 DC	20	20	125	28	25	M6	G1/8"	3,2	CC.. 09T3	201,70	**12001**	201,70	**02000**
SCLC R/L 1616 H12 DC	16	16	100	28	20	M6	G1/8"	5	CC.. 1204	190,30	**01601**	190,30	**11600**
SCLC R/L 2020 K12 DC	20	20	125	26	25	M6	G1/8"	5	CC.. 1204	201,70	**02001**	201,70	**12000**
SCLC R/L 2525 M12 DC	25	25	150	28	30	M6	G1/8"	5	CC.. 1204	209,40	**02501**	209,40	**02500**
SCLC R/L 3225 P12 DC	32	25	170	26	32	G1/8"	G1/8"	5	CC.. 1204	219,80	**03201**	219,80	**03200**

Spare parts for Article no.	Clamping screw 70 950 ... EUR 2A/28		Carbide type C 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 770 01000 / 70 770 01001	5,38	**857**					3,84	**86700**		
70 770 01200 / 70 770 01201	4,14	**859**					3,84	**86700**		
70 770 01600 / 70 770 11601	4,82	**87900**	12,46	**165**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 770 02000 / 70 770 12001	4,82	**87900**	12,46	**165**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 770 11600 / 70 770 01601	3,84	**820**	15,94	**166**	2,19	**88000**	3,84	**86700**	5,98	**170**
70 770 12000 / 70 770 02001	3,84	**820**	15,94	**166**	2,19	**88000**	3,84	**86700**	5,98	**170**
70 770 02500 / 70 770 02501	3,84	**820**	15,94	**166**	2,19	**88000**	3,84	**86700**	5,98	**170**
70 770 03200 / 70 770 03201	3,84	**820**	15,94	**166**	2,19	**88000**			5,98	**170**

Spare parts for Article no.	Sealing plugs DC 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		O-Ring 70 950 ... EUR 2A/28		Coolant nozzle DC 70 950 ... EUR 2A/28		Coolant screw plug 70 950 ... EUR 2A/28	
70 770 01000 / 70 770 01001			8,11	**039**						
70 770 01200 / 70 770 01201			11,79	**120**						
70 770 01600 / 70 770 11601	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 770 02000 / 70 770 12001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 770 11600 / 70 770 01601	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 770 12000 / 70 770 02001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 770 02500 / 70 770 02501	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 770 03200 / 70 770 03201	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-S – SCFC 90° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

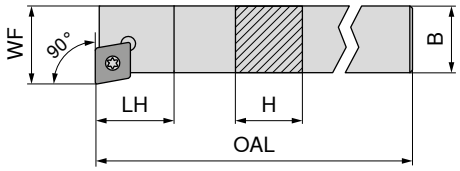

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	Left-hand 70 761 ... EUR 2A/24		Right-hand 70 760 ... EUR 2A/24	
SCFC R 0808 D06	8	8	60	10	10	1,2	CC.. 0602			77,05	**008**
SCFC R 1010 E06	10	10	70	10	12	1,2	CC.. 0602			83,28	**010**
SCFC R 1212 F09	12	12	80	13	16	3,2	CC.. 09T3			83,28	**012**
SCFC R 1616 H09	16	16	100	13	20	3,2	CC.. 09T3			103,10	**016**
SCFC R/L 2020 K12	20	20	125	17	25	5	CC.. 1204	107,60	**02000**[1)]	109,60	**020**

1) nickel-plated

Key D

Combination Key

Clamping screw

Carbide type C

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 760 008	10,05	**110**			2,99	**13800**				
70 760 010	10,05	**110**			2,99	**13800**				
70 760 012	11,96	**113**			4,14	**113**				
70 760 016			10,66	**398**	4,14	**113**	12,46	**165**	5,98	**171**
70 760 020 / 70 761 02000			10,66	**398**	3,38	**114**	15,94	**166**	5,98	**170**

9

MaxiLock-S – SCFC 90° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

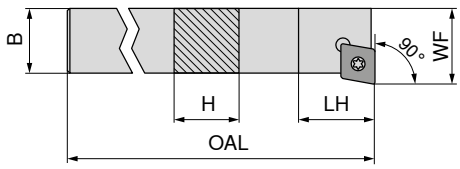



NEW
Left-hand

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	70 635 ... EUR 2A/24	
SCFC L 0808 D06	8	8	60	10	10	1,2	CC.. 0602	75,87	**00800**
SCFC L 1010 E06	10	10	70	10	12	1,2	CC.. 0602	80,94	**01000**
SCFC L 1212 F09	12	12	80	13	16	3,2	CC.. 09T3	80,94	**01200**
SCFC L 1616 H09	16	16	100	13	20	3,2	CC.. 09T3	101,20	**01600**

Key D

Clamping screw

for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 635 00800	8,11	**039**	5,38	**857**
70 635 01000	8,11	**039**	5,38	**857**
70 635 01200	11,79	**120**	4,82	**87900**
70 635 01600	11,79	**120**	4,82	**87900**

MaxiLock-S – SCSC 45° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

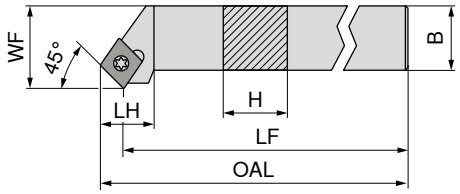



Illustrations show right-hand versions

ISO designation	H	B	OAL	LH	WF	torque moment	Insert	NEW Left-hand 70 638 ... EUR 2A/24		NEW Right-hand 70 638 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm					
SCSC R 1616 H12	16	16	100	20	20	5	CC.. 1204			101,20	**01601**
SCSC R/L 2020 K12	20	20	125	20	25	5	CC.. 1204	107,20	**02000**	107,20	**02001**
SCSC R/L 2525 M12	25	25	150	20	32	5	CC.. 1204	111,30	**02500**	111,30	**02501**

Key D

Clamping screw

Carbide type C

Threaded sleeve

Spare parts for Article no.		80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
70 638 01601	T15 - IP	11,79	**120**	M4,5x12 - IP	3,84	**820**	15,94	**166**	M4,5	5,98	**170**
70 638 02001 / 70 638 02000	T15 - IP	11,79	**120**	M4,5x12 - IP	3,84	**820**	15,94	**166**	M4,5	5,98	**170**
70 638 02501 / 70 638 02500	T15 - IP	11,79	**120**	M4,5x12 - IP	3,84	**820**	15,94	**166**	M4,5	5,98	**170**

MaxiLock-S – SCAC 90° – Toolholder with screw clamping

▲ for sliding head lathes

Scope of supply:
Tool holder with Torx key

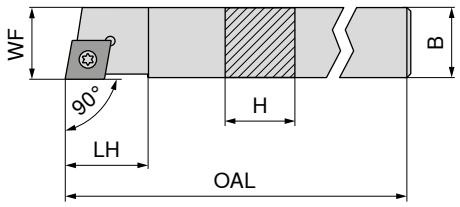



Illustrations show right-hand versions

ISO designation	H	B	OAL	LH	WF	torque moment	Insert	NEW Left-hand 70 633 ... EUR 2A/24		NEW Right-hand 70 633 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm					
SCAC R/L 0808 K06	8	8	125	9	8	1,2	CC.. 0602	80,94	**10800**	80,94	**10801**
SCAC R/L 0808 D06	8	8	60	9	8	1,2	CC.. 0602	75,87	**00800**	75,87	**00801**
SCAC R/L 1010 E06	10	10	70	9	10	1,2	CC.. 0602	80,94	**01000**	80,94	**01001**
SCAC R/L 1010 M06	10	10	150	9	10	1,2	CC.. 0602	80,94	**11000**	80,94	**11001**
SCAC R/L 1212 F09	12	12	80	13	12	3,2	CC.. 09T3	80,94	**01200**	80,94	**01201**
SCAC R/L 1212 M09	12	12	150	13	12	3,2	CC.. 09T3	91,06	**11200**	91,06	**11201**
SCAC R/L 1616 H09	16	16	100	13	16	3,2	CC.. 09T3	101,20	**11600**	101,20	**11601**
SCAC R/L 2020 K12	20	20	125	17	20	5	CC.. 1204	107,20	**12000**	107,20	**12001**

Key D

Clamping screw

Carbide type C

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 633 10801 / 70 633 10800	8,11	**039**	5,38	**857**				
70 633 00801 / 70 633 00800	8,11	**039**	5,38	**857**				
70 633 01001 / 70 633 01000	8,11	**039**	5,38	**857**				
70 633 11001 / 70 633 11000	8,11	**039**	5,38	**857**				
70 633 01201 / 70 633 01200	11,79	**120**	4,82	**87900**				
70 633 11201 / 70 633 11200	11,79	**120**	4,82	**87900**				
70 633 11601 / 70 633 11600	11,79	**120**	4,82	**87900**				
70 633 12001 / 70 633 12000	11,79	**120**	3,84	**820**	15,94	**166**	5,98	**170**

MaxiLock-S – SCAC 90° DC – Tool holder with screw clamping

▲ for sliding head lathes

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions



										NEW	NEW
										Left-hand	Right-hand
										70 766 ...	**70 766 ...**
ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	EUR	EUR
	mm	mm	mm	mm	mm			Nm		2A/24	2A/24
SCAC R/L 1212 M09 DC	12	12	150	21	12	M6	M6	3,2	CC.. 09T3	183,00 **11201**	183,00 **11200**
SCAC R/L 1212 F09 DC	12	12	80	22	12	M6	M6	3,2	CC.. 09T3	171,30 **01201**	171,30 **01200**
SCAC R/L 1616 H09 DC	16	16	100	30	16	M6	G1/8"	3,2	CC.. 09T3	190,30 **01601**	190,30 **01600**
SCAC R/L 2020 K12 DC	20	20	125	30	20	M6	G1/8"	5	CC.. 1204	201,70 **02001**	201,70 **02000**

Clamping screw

Carbide type C

Grubscrew

Grubscrew

Threaded sleeve

	70 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR	
for Article no.	2A/28		2A/28		2A/28		2A/28		2A/28	
70 766 11200 / 70 766 11201	4,14	**859**					3,84	**86700**		
70 766 01200 / 70 766 01201	4,14	**859**					3,84	**86700**		
70 766 01600 / 70 766 01601	4,82	**87900**	12,46	**165**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 766 02000 / 70 766 02001	3,84	**820**	15,94	**166**	2,19	**88000**	3,84	**86700**	5,98	**170**

Sealing plugs DC

Key D

O-Ring

Coolant nozzle DC

Coolant screw plug

	70 950 ...		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR	
for Article no.	2A/28		Y7		2A/28		2A/28		2A/28	
70 766 11200 / 70 766 11201			11,79	**120**						
70 766 01200 / 70 766 01201			11,79	**120**						
70 766 01600 / 70 766 01601	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 766 02000 / 70 766 02001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

9

MaxiLock-S – SCDC 45° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

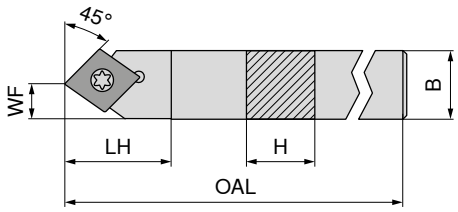



NEW
Left-hand

70 634 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	EUR 2A/24	
SCDC L 0808 K06	8	8	125	13	4	1,2	CC.. 0602	75,87	**00800**
SCDC L 1010 M06	10	10	150	13	5	1,2	CC.. 0602	80,94	**01000**
SCDC L 1212 M09	12	12	150	18	6	3,2	CC.. 09T3	91,06	**01200**
SCDC L 1414 M09	14	14	150	18	7	3,2	CC.. 09T3	91,06	**01400**

Key D

Clamping screw

Spare parts for Article no.		**80 950 ...** EUR Y7			**70 950 ...** EUR 2A/28	
70 634 00800	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**
70 634 01000	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**
70 634 01200	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**
70 634 01400	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**

MaxiLock-S – SCDC 45° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



NEW

Left-hand

70 767 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	
SCDC L 0808 K06 DC	8	8	125	17	8,5	M5	M5	1,2	CC.. 0602	171,30	**00801**
SCDC L 1010 M06 DC	10	10	150	17	10,0	M6	M6	1,2	CC.. 0602	171,30	**01001**
SCDC L 1212 M09 DC	12	12	150	23	13,0	M6	M6	3,2	CC.. 09T3	183,00	**01201**
SCDC L 1414 M09 DC	14	14	150	25	14,0	M6	G1/8"	3,2	CC.. 09T3	183,00	**01401**

Coolant screw plug

Clamping screw

Grubscrew

70 950 ... | **70 950 ...** | **70 950 ...**

Spare parts for Article no.		EUR 2A/28			EUR 2A/28			EUR 2A/28	
70 767 00801				M2,5x6 - T08	2,99	**13800**			
70 767 01001				M2,5x6 - T08	2,99	**13800**	M6x6	3,84	**86700**
70 767 01201				M3,5x11	4,14	**113**	M6x6	3,84	**86700**
70 767 01401	G 1/8"	4,59	**294**	M3,5x11	4,14	**113**	M6x6	3,84	**86700**

Cylindrical screw

Key D

83 950 ... | **80 950 ...**

Spare parts for Article no.		EUR Y7			EUR Y7	
70 767 00801	M5x5 - SW2,5	2,39	**157**	T08 - IP	8,11	**039**
70 767 01001				T08 - IP	8,11	**039**
70 767 01201				T15 - IP	11,79	**120**
70 767 01401				T15 - IP	11,79	**120**

9

MaxiLock-S – SCLC 95° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

									Left-hand		Right-hand	
									74 541 ...		**74 540 ...**	
ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	EUR 2D/80		EUR 2D/80	
HSK T63 SCLC R/L 12	HSK-T 63	70	42	53	45	100	5	CC.. 1204	286,80	**512**	286,80	**512**

Combination Key

Clamping screw

Carbide type C

Threaded sleeve

					70 950 ...			**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.					EUR 2A/28			EUR 2A/28		EUR 2A/28		EUR 2A/28	
74 540 512 / 74 541 512		T15/SW			10,66	**398**	M4,5x12	3,38	**114**	15,94	**166**	M4,5	5,98	**170**

MaxiLock-S – SCMC 50° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



								Neutral	
								74 542 ...	
ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert		EUR 2D/80	
HSK T63 SCMC N 12	HSK-T 63	115	53	0	5	CC.. 1204		391,70	**512**

Combination Key

Clamping screw

Carbide type C

Threaded sleeve

					70 950 ...			**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.					EUR 2A/28			EUR 2A/28		EUR 2A/28		EUR 2A/28	
74 542 512		T15/SW			10,66	**398**	M4,5x12	3,38	**114**	15,94	**166**	M4,5	5,98	**170**

MaxiLock-S – SCLC 95° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 655 ... EUR Y8		Right-hand 84 654 ... EUR Y8	
PSC40 SCLC R/L 50050-12	PSC 40	50	27	50	5	CC.. 1204	DC	252,20	**01295**	252,20	**01295**
PSC50 SCLC R/L 65060-12	PSC 50	60	35	65	5	CC.. 1204	DC	289,10	**01294**	289,10	**01294**
PSC63 SCLC R/L 80065-12	PSC 63	65	45	80	5	CC.. 1204	DC	321,60	**01293**	321,60	**01293**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 654 01295 / 84 655 01295	5,93	**27500**
84 654 01294 / 84 655 01294	5,93	**27500**
84 654 01293 / 84 655 01293	5,93	**27500**

9

MaxiLock-S – SCMC 50° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Neutral

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	84 674 ... EUR Y8	
PSC63 SCMC N 0100-12	PSC 63	100	5	CC.. 1204	DC	321,60	**01293**
PSC63 SCMC N 0130-12	PSC 63	130	5	CC.. 1204	DC	321,60	**11293**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 674 01293	5,93	**27500**
84 674 11293	5,93	**27500**

MaxiLock-S – SCLC 95° – Boring bar with screw clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Boring bar with Torx key



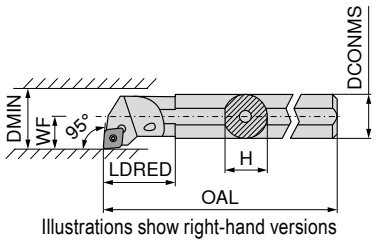

Illustrations show right-hand versions

									Left-hand		Right-hand	
									70 717 ...		**70 716 ...**	
ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	EUR		EUR	
	mm	mm	mm	mm	mm	mm	Nm		2A/24		2A/24	
S08H SCLC R/L 06	8	7,2	100	11,0	5	11	1,2	CC.. 0602	124,50	**008**	124,50	**008**
A08F SCLC R/L 06	8	7,6	80	17,0	5	11	1,2	CC.. 0602	124,50	**208**	124,50	**208**
S10K SCLC R/L 06	10	9,0	125	15,0	7	13	1,2	CC.. 0602	124,50	**010**	124,50	**010**
A10H SCLC R/L 06	10	9,5	100	19,0	7	13	1,2	CC.. 0602	124,50	**210**	124,50	**210**
S12Q SCLC R/L 06	12	11,0	180	18,8	9	16	1,2	CC.. 0602	124,50	**012**	124,50	**012**
A12K SCLC R/L 06	12	11,5	125	22,0	9	16	1,2	CC.. 0602	124,50	**212**	124,50	**212**
A16M SCLC R/L 06	16	14,0	150	50,0	9	18	1,2	CC.. 0602	124,80	**116**	124,80	**116**
S16R SCLC R/L 09	16	14,5	200	25,0	11	20	3,2	CC.. 09T3	127,20	**016**	127,20	**016**
A16M SCLC R/L 09	16	15,0	150	29,0	11	20	3,2	CC.. 09T3	127,20	**216**	127,20	**216**
S20S SCLC R/L 09	20	18,0	250	25,0	13	25	3,2	CC.. 09T3	158,60	**020**	158,60	**020**
A20Q SCLC R/L 09	20	18,5	180	32,0	13	25	3,2	CC.. 09T3	158,60	**220**	158,60	**220**
S25T SCLC R/L 09	25	23,0	300	20,0	17	32	3,2	CC.. 09T3	182,30	**025**	182,30	**025**
A25R SCLC R/L 09	25	23,0	200	36,0	17	32	3,2	CC.. 09T3	182,30	**225**	182,30	**225**
A32S SCLC R/L 12	32	30,0	250	50,0	22	40	5	CC.. 1204	250,60	**232**	250,60	**232**
A40T SCLC R/L 12	40	38,0	300	60,0	27	50	5	CC.. 1204	301,00	**240**	301,00	**240**

	Key D		Combination Key		Clamping screw		Carbide type C		Threaded sleeve	
	80 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.	EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 716 008 / 70 717 008	10,05	**110**			3,32	**116**				
70 716 208 / 70 717 208	10,05	**110**			3,32	**116**				
70 716 010 / 70 717 010	10,05	**110**			3,32	**116**				
70 716 210 / 70 717 210	10,05	**110**			3,32	**116**				
70 716 012 / 70 717 012	10,05	**110**			3,32	**116**				
70 716 212 / 70 717 212	10,05	**110**			3,32	**116**				
70 716 116 / 70 717 116	10,05	**110**			3,32	**116**				
70 716 016 / 70 717 016	11,96	**113**			4,14	**110**				
70 716 216 / 70 717 216	11,96	**113**			4,14	**110**				
70 716 020 / 70 717 020	11,96	**113**			4,14	**110**				
70 716 220 / 70 717 220	11,96	**113**			4,06	**304**				
70 716 025 / 70 717 025	11,96	**113**			4,14	**113**				
70 716 225 / 70 717 225	11,96	**113**			4,06	**304**				
70 716 232 / 70 717 232			10,66	**398**	3,38	**114**	15,94	**166**	5,98	**170**
70 716 240 / 70 717 240			10,66	**398**	3,38	**114**	15,94	**166**	5,98	**170**

MaxiLock-S – SCLC 95° – Boring bar with screw clamping

▲ with carbide core

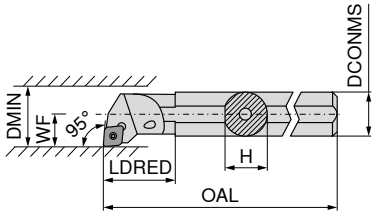

Illustrations show right-hand versions



ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 719 ... EUR 2A		Right-hand 70 718 ... EUR 2A	
E-A08F SCLC R/L 06	8	7,5	80	20,60	6	12	1,2	CC.. 0602	228,50	**208**	228,50	**208**
E-A10H SCLC R/L 06	10	9,0	100	31,75	7	14	1,2	CC.. 0602	228,50	**210**	228,50	**210**
E-A12K SCLC R/L 06	12	11,0	125	20,00	9	18	1,2	CC.. 0602	246,20	**212**	246,20	**212**
E-A16M SCLC R/L 09	16	15,0	150	45,30	11	22	3,2	CC.. 09T3	417,70	**216**	417,70	**216**
E-A20Q SCLC R/L 09	20	18,0	180	38,00	13	26	3,2	CC.. 09T3	516,40	**220**	516,40	**220**
E-A25R SCLC R/L 09	25	23,0	200	40,25	17	34	3,2	CC.. 09T3	655,60	**225**	655,60	**225**
E-A32S SCLC R/L 12	32	30,0	250	50,25	22	39	5	CC.. 1204	1.032,00	**232**	1.032,00	**232**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 718 208 / 70 719 208	T08	10,05	**110**	M2,5x5	3,32	**116**
70 718 210 / 70 719 210	T08	10,05	**110**	M2,5x5	3,32	**116**
70 718 212 / 70 719 212	T08	10,05	**110**	M2,5x5	3,32	**116**
70 718 216 / 70 719 216	T15	11,96	**113**	M4x9,5	4,06	**449**
70 718 220 / 70 719 220	T15	11,96	**113**	M4x9,5	4,06	**449**
70 718 225 / 70 719 225	T15	11,96	**113**	M4x9,5	4,06	**449**
70 718 232 / 70 719 232	T15	11,96	**113**	M4x11	4,46	**174**

MaxiLock-S – SCLC 95° – Boring bar with screw clamping

▲ with carbide core

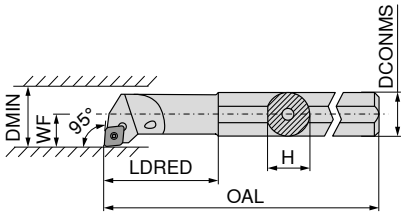

Illustrations show right-hand versions



ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 719 ... EUR 2A		Right-hand 70 718 ... EUR 2A	
E-A0608F SCLC R/L 06	8	7,5	100	25	4	8	1,2	CC.. 0602	246,20	**308**	246,20	**308**
E-A0810H SCLC R/L 06	10	9,0	110	32	6	12	1,2	CC.. 0602	246,20	**310**	246,20	**310**
E-A1012K SCLC R/L 06	12	11,0	125	38	7	14	1,2	CC.. 0602	246,20	**312**	246,20	**312**
E-A1216M SCLC R/L 06	16	15,0	150	50	9	18	1,2	CC.. 0602	246,20	**316**	246,20	**316**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 718 308 / 70 719 308	T08	10,05	**110**	M2,5x5	3,32	**116**
70 718 310 / 70 719 310	T08	10,05	**110**	M2,5x5	3,32	**116**
70 718 312 / 70 719 312	T08	10,05	**110**	M2,5x5	3,32	**116**
70 718 316 / 70 719 316	T08	10,05	**110**	M2,5x5	3,32	**116**

MaxiLock-S – SCLC 95° – Boring bar with screw clamping

▲ Type: Solid carbide

Scope of supply:
Boring bar with Torx key



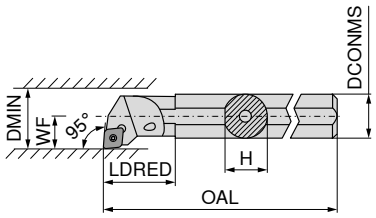

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 719 ... EUR 2A/24		Right-hand 70 718 ... EUR 2A/24	
E08H SCLC R/L 06	8	7,6	100	20	6	11	1,2	CC.. 0602	283,20	**008**	283,20	**008**
E10K SCLC R/L 06	10	9,0	125	22	7	13	1,2	CC.. 0602	327,10	**010**	327,10	**010**
E12Q SCLC R/L 06	12	11,5	180	26	9	16	1,2	CC.. 0602	429,60	**012**	429,60	**012**
E16R SCLC R/L 09	16	15,0	200	34	11	20	3,2	CC.. 09T3	561,40	**016**	561,40	**016**
E20S SCLC R/L 09	20	18,5	250	38	13	25	3,2	CC.. 09T3	701,20	**020**	701,20	**020**
E25T SCLC R/L 09	25	23,0	300	43	17	32	3,2	CC.. 09T3	1.236,00	**025**	1.236,00	**025**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 719 008 / 70 718 008	T08	10,05	**110**	M2,5x5	3,32	**116**
70 719 010 / 70 718 010	T08	10,05	**110**	M2,5x5	3,32	**116**
70 719 012 / 70 718 012	T08	10,05	**110**	M2,5x5	3,32	**116**
70 719 016 / 70 718 016	T15	11,96	**113**	M3,5x7,2	4,14	**110**
70 719 020 / 70 718 020	T15	11,96	**113**	M3,5x8,6	4,06	**304**
70 719 025 / 70 718 025	T15	11,96	**113**	M3,5x11	4,14	**113**

MaxiLock-S – SCFC 90° – Boring bar with screw clamping

Scope of supply:
Boring bar with Torx key



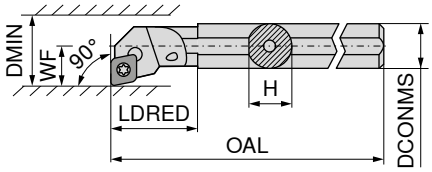

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 793 ... EUR 2A/24		Right-hand 70 792 ... EUR 2A/24	
A08F SCFC R/L 06	8	7,6	80	17	5	11	1,2	CC.. 0602	124,50	**208**	124,50	**208**
A10H SCFC R/L 06	10	9,5	100	19	7	13	1,2	CC.. 0602	124,50	**210**	124,50	**210**
A12K SCFC R/L 06	12	11,5	125	22	9	16	1,2	CC.. 0602	124,50	**212**	124,50	**212**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 792 208 / 70 793 208	T08	10,05	**110**	M2,5x5	3,32 **116**
70 792 210 / 70 793 210	T08	10,05	**110**	M2,5x5	3,32 **116**
70 792 212 / 70 793 212	T08	10,05	**110**	M2,5x5	3,32 **116**

MaxiLock-S – SCMC 50° – Boring bar with screw clamping

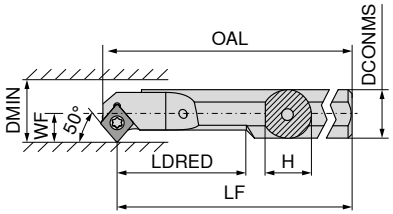

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LF mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 723 ... EUR 2A		Right-hand 70 722 ... EUR 2A	
A08H SCMC R/L 06	8	7	104,15	100	20	5,5	10,5	1,2	CC.. 0602	122,10	**208**	122,10	**208**
A10H SCMC R/L 06	10	9	114,15	110	26	6,0	11,0	1,2	CC.. 0602	122,10	**210**	122,10	**210**
A12K SCMC R/L 06	12	11	129,15	125	32	7,0	13,0	1,2	CC.. 0602	122,10	**212**	122,10	**212**
A16M SCMC R/L 06	16	15	154,15	150	40	9,0	16,0	1,2	CC.. 0602	124,80	**216**	124,80	**216**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 723 208 / 70 722 208	T08	10,05	**110**	M2,5x5	3,32 **116**
70 723 210 / 70 722 210	T08	10,05	**110**	M2,5x5	3,32 **116**
70 723 212 / 70 722 212	T08	10,05	**110**	M2,5x5	3,32 **116**
70 723 216 / 70 722 216	T08	10,05	**110**	M2,5x5	3,32 **116**

9

MaxiLock-S – SCLC 95° – Boring bar with screw clamping

Scope of supply:
Boring bar with Torx key





Illustrations show right-hand versions

									Left-hand		Right-hand	
									74 564 ...		**74 563 ...**	
ISO designation	Adapter	LPR mm	LH mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	**EUR** 2D/80		**EUR** 2D/80	
HSK T63 40L SCLC R/L 12	HSK-T 63	140	114	40	27	50	5	CC.. 1204	394,60	**512**	394,60	**512**

Combination Key

Clamping screw

Carbide type C

Threaded sleeve

									70 950 ...		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.									**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28	
74 563 512 / 74 564 512		T15/SW					M4,5x12		10,66	**398**	3,38	**114**	15,94	**166**

			70 950 ...
			EUR 2A/28
M4,5			5,98	**170**

DCGT / DCMT / DCET

Designation	L	S	D1	IC
	mm	mm	mm	mm
DC.T 0702..	7,75	2,38	2,8	6,35
DC.T 11T3..	11,60	3,97	4,4	9,52



DCGT / DCMT

		-CF05 CTEP110	-CF55 CTEP110	-SF TCM407	-SF TCM10	-SMF TCM10	NEW -SF CTCP125-P	NEW -SF CTCP115-P
		DRAGONSKIN	DRAGONSKIN				DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	F
		CERMET DCGT	CERMET DCMT	CERMET DCGT	CERMET DCGT	CERMET DCMT	DCGT	DCMT
		76 245 ...	76 246 ...	70 257 ...	70 257 ...	70 265 ...	76 257 ...	76 259 ...
ISO	RE mm	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08
070201EN	0,1				17,64 898			
070202EN	0,2	18,22 002	10,34 002		17,64 900	9,57 898	18,22 50201	
070204EN	0,4	18,22 004	10,34 004	17,64 852	17,64 902	9,57 900		10,23 30401
11T302EN	0,2	24,12 014		22,50 854	22,50 904			
11T304EN	0,4	24,12 016	14,34 016	22,50 856	22,50 906	13,43 904		14,36 31601
11T308EN	0,8	24,12 018	14,34 018	22,50 858	22,50 908	13,43 906		14,36 31801
P		●	●	●	●	●	●	●
M		○	○	○	○	○		
K		○	○	○	○	○	○	○
N								
S								
H								
O								

9

DCMT / DCGT

		NEW	NEW	NEW	NEW	NEW	NEW	NEW
		-SF CTCP125-P	-SF CTCP135-P	-SMF CTCP115-P	-SMF CTCP125-P	-SMF CTCP135-P	-SM CTCP125-P	-SM CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	M	M
		DCMT	DCMT	DCMT	DCMT	DCMT	DCGT	DCGT
		76 259 ...	76 259 ...	76 265 ...	76 265 ...	76 265 ...	76 256 ...	76 256 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
070202EN	0,2						18,22 50201	18,22 70201
070204EN	0,4	10,23 50401	10,23 70401		10,23 50401	10,23 70401		
070208EN	0,8					10,23 70601		
11T304EN	0,4	14,36 51601	14,36 71601	14,36 31601	14,36 51601	14,36 71601		
11T308EN	0,8	14,36 51801	14,36 71801	14,36 31801	14,36 51801	14,36 71801		
P		●	●	●	●	●	●	●
M			○			○		○
K		○		○	○		○	
N								
S								
H								
O								

DCMT

				NEW	NEW	NEW	NEW
		-SM CTCK110	-SM CTCK120	-SM CTCP115-P	-SM CTCP115-P	-SM CTCP125-P	-SM CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		M	M	M	M	M	M
		DCMT	DCMT	DCMT	DCMT	DCMT	DCMT
		70 258 ...	70 258 ...	76 183 ...	76 258 ...	76 258 ...	76 258 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
070204EN	0,4	10,23 004	10,23 554		10,23 30401	10,23 50401	10,23 70401
070208EN	0,8	10,23 006	10,23 506		10,23 30601	10,23 50601	10,23 70601
11T304EN	0,4	14,36 016	14,36 516		14,36 31601	14,36 51601	14,36 71601
11T308EN	0,8	14,36 018	14,36 518		14,36 31801	14,36 51801	14,36 71801
11T312EN	1,2			14,36 32001		14,36 52001	
P		○	○	●	●	●	●
M							○
K		●	●	○	○	○	
N							
S							
H							
O							

DCMT

		NEW	NEW		NEW		NEW	NEW
		-SMQ CTCP115-P	-SMQ CTCP125-P	-M25 CTCM120	-SF CTPM125	-M25 CTPM125	-SM CTPM125	-F43 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	F	F	F	M	F
		DCMT	DCMT	DCMT	DCMT	DCMT	DCMT	DCMT
		76 195 ...	76 195 ...	75 213 ...	75 044 ...	75 213 ...	75 048 ...	75 032 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
070202EN	0,2			10,23 10200		10,23 202		10,23 30200
070204EN	0,4	11,66 30401	11,66 50401	10,23 10400	10,23 20400	10,23 204		10,23 30400
11T302EN	0,2			14,36 11400		14,36 214		14,36 31400
11T304EL	0,4	16,02 31601	16,02 51601					
11T304EN	0,4	16,02 31501	16,02 51501	14,36 11600	14,36 21600	14,36 216		14,36 31600
11T304ER	0,4	16,02 31701	16,02 51701					
11T308EN	0,8	16,02 31801	16,02 51801	14,36 11800	14,36 21800	14,36 218	14,36 21800	14,36 31800
P		●	●	○	○	○	○	○
M				●	●	●	●	●
K		○	○					
N								
S								○
H								
O								

9

DCMT / DCGT

				NEW		NEW
		-M25 CTCM130	-M55 CTCM120	-M55 CTPM125	-SM CTCM130	-M55 CTCM130	-SF CTPM125
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		F	M	M	M	M	F
		DCMT	DCMT	DCMT	DCMT	DCMT	DCGT
		75 213 ...	75 214 ...	75 214 ...	75 048 ...	75 214 ...	75 043 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
070202EN	0,2	10,23 30200					18,22 20200
070204EN	0,4	10,23 30400	10,23 10400	10,23 204	10,23 30400	10,23 30400	
070208EN	0,8		10,23 10600	10,23 206	10,23 30600	10,23 30600	
11T302EN	0,2	14,36 31400					
11T304EN	0,4	14,36 31600	14,36 11600	14,36 216	14,36 31600	14,36 31600	
11T308EN	0,8	14,36 31800	14,36 11800	14,36 218	14,36 31800	14,36 31800	
P		○	○	○	○	○	○
M		●	●	●	●	●	●
K							
N							
S		○			○	○	
H							
O							

DCGT

	-23P H216T	-25P H210T	-25P CTPX710 DRAGONSKIN	-25Q H210T	-25Q CTPX710 DRAGONSKIN	-27 H10T	-27 CTPX715 DRAGONSKIN
							
	F DCGT	F DCGT	M DCGT	M DCGT	M DCGT	M DCGT	M DCGT
	70 261 ...	70 263 ...	70 263 ...	70 263 ...	70 263 ...	70 260 ...	70 260 ...
ISO	RE mm	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90
070202FN	0,2		12,92 632	15,45 70200			12,20 600	14,83 80200
070204FN	0,4	12,92 654	12,92 634	15,45 70400			12,20 602	14,83 80400
11T302FN	0,2		16,02 635	18,68 71400			15,29 604	17,96 81400
11T304FN	0,4	16,02 664	16,02 636	18,68 71600	17,50 660	22,30 75600	15,29 606	17,96 81600
11T304FL	0,4				17,50 670	22,30 75700		
11T304FR	0,4				17,50 680	22,30 75800		
11T308FN	0,8	16,02 666	16,02 638	18,68 71800	17,50 662	22,30 76000	15,29 608	17,96 81800
11T308FL	0,8				17,50 672			
11T308FR	0,8				17,50 682			
P				●		●		●
M				●		●		●
K		○	○		○		○	○
N		●	●	●	●	●	●	●
S			○	●	○	●		●
H								
O		○	○		○		○	○

→ v_c Page 196–209

DCMT / DCET

		NEW		
		-29 H216T	-29 CTPX715	-F05 CTPX710
			DRAGONSKIN	DRAGONSKIN
				
		M	M	F
		DCMT	DCMT	DCET
		70 246 ...	70 246 ...	76 254 ...
ISO	RE mm	EUR 1A/90	EUR 1A/90	EUR 1A/08
0702005FN	0,05			22,03 10200
070201FN	0,10			22,03 10400
0702015FN	0,15			22,03 10600
070202FN	0,20			22,03 10800
070204EN	0,40	9,37 60400	11,52 70400	
11T3005FN	0,05			29,20 11400
11T301FN	0,10			29,20 11600
11T3015FN	0,15			29,20 11800
11T302FN	0,20			29,20 12000
11T304EN	0,40	12,61 61600	14,39 71600	
11T304FN	0,40			29,20 12200
11T308EN	0,80	12,61 61800	14,39 71800	
P			●	●
M			●	●
K		○	○	
N		●	●	●
S			●	●
H				
O		○	○	

9

DCGW / DCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
DCG. 0702..	7,75	2,38	2,8	6,35
DCG. 11T3..	11,60	3,97	4,4	9,52



DCGT A



DCGT A L



DCGT A R



DCGW A

DCGW / DCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDMD05		CTDMD05		-Q CTDMD05		-Q CTDMD05		CTDPD20		CTDPD20	
															
				F		F		F		F		F		F	
				DIAMOND DCGW		DIAMOND DCGT		DIAMOND DCGW		DIAMOND DCGT		DIAMOND DCGW		DIAMOND DCGT	
				71 130 ...		71 134 ...		71 178 ...		71 176 ...		71 130 ...		71 134 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
070202FN	0,2	A (1)	2,5	377,00	00200	402,50	050								
070202FN	0,2	A (1)	3,7									64,00	100	64,00	100
070204FN	0,4	A (1)	2,5	377,00	00400	402,50	052								
070204FR	0,4	A (1)	2,5							565,00	50001				
070204FN	0,4	A (1)	3,4									64,00	102	64,00	102
070208FN	0,8	A (1)	2,5	377,00	00600	402,50	054								
070208FN	0,8	A (1)	3,0									64,00	104	64,00	104
11T302FN	0,2	A (1)	2,5			402,50	056								
11T302FN	0,2	A (1)	3,0	377,00	056										
11T302FN	0,2	A (1)	4,7									74,00	106	74,00	106
11T304FN	0,4	A (1)	2,5			402,50	058								
11T304FL	0,4	A (1)	3,0					565,00	50001						
11T304FN	0,4	A (1)	3,0	377,00	058										
11T304FN	0,4	A (1)	4,3									74,00	108	74,00	108
11T308FN	0,8	A (1)	2,5			402,50	060								
11T308FN	0,8	A (1)	4,0									74,00	110	74,00	110
11T312FN	1,2	A (1)	3,5											74,00	11200
11T312FN	1,2	A (1)	3,6									74,00	11200		
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

DCGW / DCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPS30	CTDPS30	CTDPS30	CTDPS30	-CB1 CTDPU20	-CB2 CTDPU20
									
				F	F	F	F	F	M
				DIAMOND DCGW	DIAMOND DCGT	DIAMOND DCGT	DIAMOND DCGT	DIAMOND DCGT	DIAMOND DCGT
				71 177 ...	71 173 ...	71 173 ...	71 173 ...	71 174 ...	71 175 ...
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0	EUR Y0	EUR Y0	EUR Y0	EUR Y0	EUR Y0
070201FN	0,1	A (1)	3,8	64,00 20001		64,00 20001			
070202FN	0,2	A (1)	3,7	64,00 20101		64,00 20101		72,00 30001	
070204FN	0,4	A (1)	3,4	64,00 20201				72,00 30101	72,00 30001
070204FL	0,4	A (1)	5,5		102,20 20201				
070208FN	0,8	A (1)	3,0	64,00 20301					
11T301FN	0,1	A (1)	4,8	74,00 20401		74,00 20301			
11T302FN	0,2	A (1)	4,7	74,00 20501		74,00 20401			
11T304FN	0,4	A (1)	4,3	74,00 20601				82,00 30201	82,00 30101
11T304FL	0,4	A (1)	7,5		112,10 20501				
11T308FN	0,8	A (1)	4,0	74,00 20701				82,00 30301	
11T308FL	0,8	A (1)	7,0		112,10 20601				
11T308FR	0,8	A (1)	7,0				112,10 20701		
11T312FN	1,2	A (1)	3,6	74,00 20801					
11T312FL	1,2	A (1)	6,5		112,10 20801				
11T312FR	1,2	A (1)	6,5				112,10 20901		
P									
M									
K									
N				●	●	●	●	●	●
S									
H									
O				●	●	●	●	●	●

9

DCGT / DCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPD20		CTDPD20		-Q CTDPD20		-Q CTDPD20		-CB1 CTDPD20		-Q CTDPS30	
															
				F		F		F		F		F		F	
				DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGW	
				71 136 ...		71 135 ...		71 144 ...		71 145 ...		71 310 ...		71 138 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
070201FN	0,1	A (1)	3,8									72,00	10100		
070202FN	0,2	A (1)	3,7									72,00	102		
070204FL	0,4	A (1)	3,0							72,00	104				
070204FR	0,4	A (1)	3,0					72,00	104						
070204FN	0,4	A (1)	3,4									72,00	104		
070204FRR	0,4	A (1)	5,5			64,00	102								
070204FLL	0,4	A (1)	5,5	64,00	102										
070208FN	0,8	A (1)	3,0									72,00	108		
070208FRR	0,8	A (1)	5,0			64,00	104								
070208FLL	0,8	A (1)	5,0	64,00	104										
11T301FN	0,1	A (1)	4,8									82,00	11100		
11T302FR	0,2	A (1)	4,0											82,00	162
11T302FN	0,2	A (1)	4,7									82,00	112		
11T304FL	0,4	A (1)	4,0							82,00	114				
11T304FR	0,4	A (1)	4,0					82,00	114					82,00	164
11T304FN	0,4	A (1)	4,3									82,00	114		
11T304FRR	0,4	A (1)	7,5			80,00	108								
11T304FLL	0,4	A (1)	7,5	80,00	108										
11T308FN	0,8	A (1)	4,0									82,00	118		
11T308FRR	0,8	A (1)	7,0			80,00	110								
11T308FLL	0,8	A (1)	7,0	80,00	110										
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

DCGW / DCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				-Q CTDPS30		-Q CTDPS30		-Q CTDPS30		-CB1 CTDPS30		-CB2 CTDPS30		-CB3 CTDPU20	
															
				F		F		F		F		M		R	
				DIAMOND DCGW		DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGT		DIAMOND DCGT	
				71 139 ...		71 144 ...		71 145 ...		71 310 ...		71 311 ...		71 312 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
070201FL	0,1	A (1)	3,0					72,00	151						
070201FR	0,1	A (1)	3,0			72,00	15000								
070201FN	0,1	A (1)	3,8							72,00	20100				
070202FL	0,2	A (1)	3,0					72,00	152						
070202FR	0,2	A (1)	3,0			72,00	152								
070202FN	0,2	A (1)	3,7							72,00	202	72,00	202		
070204FN	0,4	A (1)	3,4							72,00	204	72,00	204	72,00	204
070208FN	0,8	A (1)	3,0									72,00	208		
11T301FR	0,1	A (1)	4,0			82,00	161								
11T301FL	0,1	A (1)	4,0					82,00	161						
11T301FN	0,1	A (1)	4,8							82,00	21100	82,00	21100		
11T302FL	0,2	A (1)	4,0					82,00	162						
11T302FR	0,2	A (1)	4,0			82,00	162								
11T302FN	0,2	A (1)	4,7							82,00	212	82,00	212		
11T304FL	0,4	A (1)	4,0	82,00	164										
11T304FN	0,4	A (1)	4,3							82,00	214	82,00	214	82,00	214
11T308FN	0,8	A (1)	4,0							82,00	218	82,00	218	82,00	218
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

9

DCGW / DCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPU20		CTDCD10		-CB1 CTDCD10		-CB2 CTDCD10	
											
				F		F		F		M	
				DIAMOND DCGW		DIAMOND DCGW		DIAMOND DCGT		DIAMOND DCGT	
				71 177 ...		71 177 ...		71 310 ...		71 311 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0	
070202FN	0,2	A (1)	2,6			78,08	40001	100,00	302	100,00	30200
070204FN	0,4	A (1)	2,3			78,08	40101	100,00	304	100,00	304
070204FN	0,4	A (1)	3,4	64,00	30001						
070208FN	0,8	A (1)	2,0			78,08	40201			87,84	308
070208FN	0,8	A (1)	3,0	64,00	30101						
11T302FN	0,2	A (1)	2,6			90,28	40301	100,00	31200	100,00	31200
11T304FN	0,4	A (1)	2,3			90,28	40401	100,00	314	100,00	314
11T304FN	0,4	A (1)	4,3	74,00	30201						
11T308FN	0,8	A (1)	2,0			90,28	40501	100,00	318	100,00	318
11T308FN	0,8	A (1)	4,0	74,00	30301						
P											
M											
K											
N				●		●		●		●	
S											
H											
O				●		●		●		●	

MaxiLock-S – SDJC 93° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

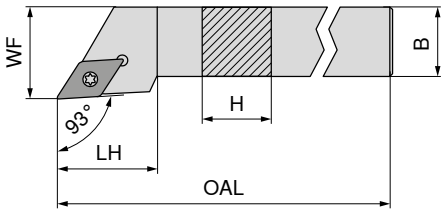



Illustrations show right-hand versions

								NEW Left-hand		NEW Right-hand	
								70 643 ...		**70 643 ...**	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
SDJC R/L 0808 D07	8	8	60	13,0	10	1,2	DC.. 0702	75,87	**00800**	75,87	**00801**
SDJC R/L 1010 E07	10	10	70	13,0	12	1,2	DC.. 0702	80,94	**01000**	80,94	**01001**
SDJC R/L 1212 F07	12	12	80	14,3	16	1,2	DC.. 0702	80,94	**01200**	80,94	**01201**
SDJC R/L 1616 H11	16	16	100	19,3	20	3,2	DC.. 11T3	101,20	**01600**	101,20	**01601**
SDJC R/L 2020 K11	20	20	125	19,9	25	3,2	DC.. 11T3	107,20	**02000**	107,20	**02001**
SDJC R/L 2525 M11	25	25	150	21,2	32	3,2	DC.. 11T3	111,30	**02500**	111,30	**02501**
SDJC R/L 3225 P11	32	25	170	21,2	32	3,2	DC.. 11T3	116,40	**03200**	116,40	**03201**

Key D

Clamping screw

Solid Carbide Seat D

Threaded sleeve

			80 950 ...			**70 950 ...**		**70 950 ...**			**70 950 ...**		
Spare parts for Article no.			EUR Y7			EUR 2A/28		EUR 2A/28			EUR 2A/28		
70 643 00800 / 70 643 00801	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**							
70 643 01000 / 70 643 01001	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**							
70 643 01200 / 70 643 01201	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**							
70 643 01600 / 70 643 01601	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**		
70 643 02000 / 70 643 02001	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**		
70 643 02500 / 70 643 02501	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**		
70 643 03200 / 70 643 03201	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**		

MaxiLock-S – SDJC 93° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

										NEW Left-hand	NEW Right-hand
										70 773 ...	70 773 ...
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	EUR 2A/24
SDJC R/L 1010 E07 DC	10	10	70	20	12	M6	M6	1,2	DC.. 0702	171,30 **01001**	171,30 **01000**
SDJC R/L 1212 F07 DC	12	12	80	21	16	M6	M6	1,2	DC.. 0702	171,30 **01201**	171,30 **01200**
SDJC R/L 1616 H11 DC	16	16	100	30	20	M6	G1/8"	3,2	DC.. 11T3	190,30 **01601**	190,30 **01600**
SDJC R/L 2020 K11 DC	20	20	125	30	25	M6	G1/8"	3,2	DC.. 11T3	201,70 **02001**	201,70 **02000**
SDJC R/L 2525 M11 DC	25	25	150	35	32	M6	G1/8"	3,2	DC.. 11T3	209,40 **02501**	209,40 **02500**

	Clamping screw	Solid Carbide Seat D	Grubscrew	Grubscrew	Threaded sleeve
	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 773 01000 / 70 773 01001	5,38 **857**			3,84 **86700**	
70 773 01200 / 70 773 01201	5,38 **857**			3,84 **86700**	
70 773 01600 / 70 773 01601	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 773 02000 / 70 773 02001	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 773 02500 / 70 773 02501	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**

	Sealing plugs DC	Key D	O-Ring	Coolant nozzle DC	Coolant screw plug
	70 950 ...	80 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.	EUR 2A/28	EUR Y7	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 773 01000 / 70 773 01001		8,11 **039**			
70 773 01200 / 70 773 01201		8,11 **039**			
70 773 01600 / 70 773 01601	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 773 02000 / 70 773 02001	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 773 02500 / 70 773 02501	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**

MaxiLock-S – SDHC 107.5° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

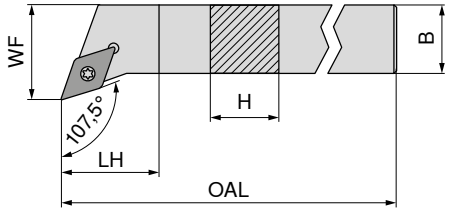



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 642 ... EUR 2A/24		NEW Right-hand 70 642 ... EUR 2A/24	
SDHC R/L 1010 E07	10	10	70	7,6	12	1,2	DC.. 0702	80,94	**01000**	80,94	**01001**
SDHC R/L 1212 F07	12	12	80	12,2	16	1,2	DC.. 0702	80,94	**01200**	80,94	**01201**
SDHC R/L 1616 H11	16	16	100	11,6	20	3,2	DC.. 11T3	101,20	**01600**	101,20	**01601**
SDHC R/L 2020 K11	20	20	125	14,1	25	3,2	DC.. 11T3	107,20	**02000**	107,20	**02001**
SDHC R/L 2525 M11	25	25	150	20,5	32	3,2	DC.. 11T3	111,30	**02500**	111,30	**02501**

Key D

Clamping screw

Solid Carbide Seat D

Threaded sleeve

Spare parts for Article no.	Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat D 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 642 01000 / 70 642 01001	8,11	**039**	5,38	**857**				
70 642 01200 / 70 642 01201	8,11	**039**	5,38	**857**				
70 642 01600 / 70 642 01601	11,79	**120**	4,82	**87900**	9,66	**106**	5,98	**171**
70 642 02000 / 70 642 02001	11,79	**120**	4,82	**87900**	9,66	**106**	5,98	**171**
70 642 02500 / 70 642 02501	11,79	**120**	4,82	**87900**	9,66	**106**	5,98	**171**

MaxiLock-S – SDHC 107.5° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

										NEW Left-hand 70 772 ...		NEW Right-hand 70 772 ...	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
SDHC R/L 1212 F07 DC	12	12	80	20	16	M6	M6	1,2	DC.. 0702	171,30	**01201**	171,30	**01200**
SDHC R/L 1616 H11 DC	16	16	100	25	20	M6	G1/8"	3,2	DC.. 11T3	190,30	**01601**	190,30	**01600**
SDHC R/L 2020 K11 DC	20	20	125	28	25	M6	G1/8"	3,2	DC.. 11T3	201,70	**02001**	201,70	**02000**
SDHC R/L 2525 M11 DC	25	25	150	27	32	M6	G1/8"	3,2	DC.. 11T3	209,40	**02501**	209,40	**02500**

	Clamping screw	Solid Carbide Seat D	Grubscrew	Grubscrew	Threaded sleeve
	70 950 ...	70 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 772 01201 / 70 772 01200	5,38 **857**			3,84 **86700**	
70 772 01601 / 70 772 01600	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 772 02001 / 70 772 02000	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 772 02501 / 70 772 02500	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**

	Sealing plugs DC	Key D	O-Ring	Coolant nozzle DC	Coolant screw plug
	70 950 ...	80 950 ...	70 950 ...	70 950 ...	70 950 ...
Spare parts for Article no.	EUR 2A/28	EUR Y7	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 772 01201 / 70 772 01200		8,11 **039**			
70 772 01601 / 70 772 01600	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 772 02001 / 70 772 02000	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 772 02501 / 70 772 02500	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**

MaxiLock-S – SDAC 90° – Toolholder with screw clamping

▲ for sliding head lathes

Scope of supply:

Tool holder with Torx key

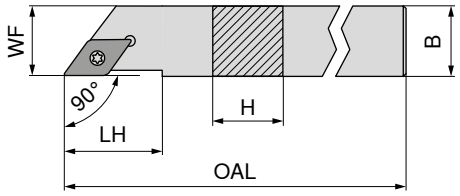



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 639 ... EUR 2A/24		NEW Right-hand 70 639 ... EUR 2A/24	
SDAC R/L 0808 K07	8	8	125	14	8	1,2	DC.. 0702	80,94	**00800**	80,94	**00801**
SDAC R/L 1010 M07	10	10	150	14	10	1,2	DC.. 0702	80,94	**01000**	80,94	**01001**
SDAC R/L 1212 M07	12	12	150	14	12	1,2	DC.. 0702	91,06	**01200**	91,06	**01201**
SDAC R/L 1212 M11	12	12	150	21	12	3,2	DC.. 11T3	91,06	**11200**	91,06	**11201**
SDAC R/L 1414 M11	14	14	150	21	14	3,2	DC.. 11T3	91,06	**01400**	91,06	**01401**

Spare parts for Article no.	Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
70 639 00800 / 70 639 00801	T08 - IP	8,11 **039**	M2,5x6 - IP	5,38 **857**
70 639 01000 / 70 639 01001	T08 - IP	8,11 **039**	M2,5x6 - IP	5,38 **857**
70 639 01200 / 70 639 01201	T08 - IP	8,11 **039**	M2,5x6 - IP	5,38 **857**
70 639 11200 / 70 639 11201	T15 - IP	11,79 **120**	M3,5x11	4,82 **87900**
70 639 01400 / 70 639 01401	T15 - IP	11,79 **120**	M3,5x11	4,82 **87900**

9

MaxiLock-S – SDAC 90° DC – Tool holder with screw clamping

▲ for sliding head lathes

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	NEW Left-hand 70 771 ... EUR 2A/24		NEW Right-hand 70 771 ... EUR 2A/24	
SDAC R/L 0808 K07 DC	8	8	125	21	8	M5	M5	1,2	DC.. 0702	171,30	**00801**	171,30	**00800**
SDAC R/L 1010 M07 DC	10	10	150	21	10	M6	M6	1,2	DC.. 0702	171,30	**01001**	171,30	**01000**
SDAC R/L 1212 M07 DC	12	12	150	21	12	M6	M6	1,2	DC.. 0702	183,00	**01201**	183,00	**01200**
SDAC R/L 1212 M11 DC	12	12	150	29	12	M6	M6	3,2	DC.. 11T3	183,00	**11201**	183,00	**11200**

Spare parts for Article no.	Cylindrical screw 83 950 ... EUR Y7		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28	
70 771 00800 / 70 771 00801	2,39	**157**	8,11	**039**	2,99	**13800**		
70 771 01000 / 70 771 01001			8,11	**039**	2,99	**13800**	3,84	**86700**
70 771 01200 / 70 771 01201			8,11	**039**	2,99	**13800**	3,84	**86700**
70 771 11200 / 70 771 11201			11,79	**120**	4,14	**113**	3,84	**86700**

MaxiLock-S – SDNC 62.5° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

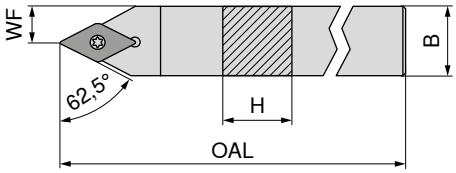



NEW
Neutral

ISO designation	H mm	B mm	OAL mm	WF mm	torque moment Nm	Insert	70 645 ... EUR 2A/24	
SDNC N 0808 K07	8	8	125	4,0	1,2	DC.. 0702	75,87	**00800**
SDNC N 1010 M07	10	10	150	5,0	1,2	DC.. 0702	80,94	**11000**
SDNC N 1010 E07	10	10	70	5,0	1,2	DC.. 0702	80,94	**01000**
SDNC N 1212 F07	12	12	80	6,0	1,2	DC.. 0702	80,94	**01200**
SDNC N 1212 M07	12	12	150	6,0	1,2	DC.. 0702	91,06	**11200**
SDNC N 1212 M11	12	12	150	6,0	3,2	DC.. 11T3	91,06	**21200**
SDNC N 1616 H11	16	16	100	8,0	3,2	DC.. 11T3	101,20	**01600**
SDNC N 2020 K11	20	20	125	10,0	3,2	DC.. 11T3	107,20	**02000**
SDNC N 2525 M11	25	25	150	12,5	3,2	DC.. 11T3	111,30	**02500**

Key D

Clamping screw

Solid Carbide Seat D

Threaded sleeve

Spare parts for Article no.		80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
70 645 00800	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 645 11000	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 645 01000	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 645 01200	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 645 11200	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 645 21200	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**					
70 645 01600	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**
70 645 02000	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**
70 645 02500	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	9,66	**106**	M3,5	5,98	**171**

MaxiLock-S – SDNC 62.5° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key





NEW

Neutral

70 774 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	
SDNC N 1212 M07 DC	12	12	150	24	6,0	M6	M6	1,2	DC.. 0702	183,00	**11200**
SDNC N 1212 F07 DC	12	12	80	24	6,0	M6	M6	1,2	DC.. 0702	171,30	**01200**
SDNC N 1212 M11 DC	12	12	150	31	6,0	M6	M6	3,2	DC.. 11T3	183,00	**21200**
SDNC N 1616 H11 DC	16	16	100	30	8,0	M6	G1/8"	3,2	DC.. 11T3	190,30	**01600**
SDNC N 2020 K11 DC	20	20	125	39	10,0	M6	G1/8"	3,2	DC.. 11T3	201,70	**02000**
SDNC N 2525 M11 DC	25	25	150	30	12,5	M6	G1/8"	3,2	DC.. 11T3	209,40	**02500**

	Clamping screw	Solid Carbide Seat D	Grubscrew	Grubscrew	Threaded sleeve
	70 950 ...	**70 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 774 11200	5,38 **857**			3,84 **86700**	
70 774 01200	5,38 **857**			3,84 **86700**	
70 774 21200	4,14 **859**			3,84 **86700**	
70 774 01600	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 774 02000	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 774 02500	4,82 **87900**	9,66 **106**	2,19 **88000**	3,84 **86700**	5,98 **171**

	Sealing plugs DC	Key D	O-Ring	Coolant nozzle DC	Coolant screw plug
	70 950 ...	**80 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**
Spare parts for Article no.	EUR 2A/28	EUR Y7	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 774 11200		8,11 **039**			
70 774 01200		8,11 **039**			
70 774 21200		11,79 **120**			
70 774 01600	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 774 02000	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 774 02500	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**

MaxiLock-S – SDJC 93° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 544 ... EUR 2D/80		Right-hand 74 543 ... EUR 2D/80	
HSK T63 SDJC R/L 11	HSK-T 63	70	42	53	45	100	3.2	DC.. 11T3	286,80	**511**	286,80	**511**

Combination Key
70 950 ...
EUR 2A/28

Clamping screw
70 950 ...
EUR 2A/28

Solid Carbide Seat D
70 950 ...
EUR 2A/28

Threaded sleeve
70 950 ...
EUR 2A/28

Spare parts for Article no.											
74 543 511 / 74 544 511	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	9,66	**106**	M3,5	5,98	**171**

MaxiLock-S – SDMC 48° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

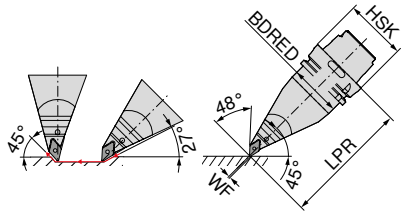

ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Left-hand 74 546 ... EUR 2D/80	
HSK T63 SDMC L 11	HSK-T 63	130	53	0	3.2	DC.. 11T3	391,70	**511**

Combination Key
70 950 ...
EUR 2A/28

Clamping screw
70 950 ...
EUR 2A/28

Solid Carbide Seat D
70 950 ...
EUR 2A/28

Threaded sleeve
70 950 ...
EUR 2A/28

Spare parts for Article no.											
74 546 511	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	9,66	**106**	M3,5	5,98	**171**

MaxiLock-S – SDUC 93° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 84 659 ... EUR Y8		Right-hand 84 658 ... EUR Y8	
PSC40 SDUC R/L 50050-11	PSC 40	50	27	50	3	DC.. 11T3	252,20	**01195**	252,20	**01195**
PSC50 SDUC R/L 65060-11	PSC 50	60	35	65	3	DC.. 11T3	289,10	**01194**	289,10	**01194**
PSC63 SDUC R/L 80065-11	PSC 63	65	45	80	3	DC.. 11T3	321,60	**01193**	321,60	**01193**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 658 01195 / 84 659 01195	3,92	**27600**
84 658 01194 / 84 659 01194	3,92	**27600**
84 658 01193 / 84 659 01193	3,92	**27600**

9

MaxiLock-S – SDJC 93° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 663 ... EUR Y8		Right-hand 84 662 ... EUR Y8	
PSC40 SDJC R/L 50050-11	PSC 40	50	27	50	3	DC.. 11T3	DC	252,20	**01195**	252,20	**01195**
PSC50 SDJC R/L 65060-11	PSC 50	60	35	65	3	DC.. 11T3	DC	289,10	**01194**	289,10	**01194**
PSC63 SDJC R/L 80065-11	PSC 63	65	45	80	3	DC.. 11T3	DC	321,60	**01193**	321,60	**01193**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 662 01195 / 84 663 01195	3,92	**27600**
84 662 01194 / 84 663 01194	3,92	**27600**
84 662 01193 / 84 663 01193	3,92	**27600**

MaxiLock-S – SDHC 107.5° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 667 ... EUR Y8		Right-hand 84 666 ... EUR Y8	
PSC40 SDHC R/L 50050-11	PSC 40	50	27	50	3	DC.. 11T3	DC	252,20	**01195**	252,20	**01195**
PSC50 SDHC R/L 65060-11	PSC 50	60	35	65	3	DC.. 11T3	DC	289,10	**01194**	289,10	**01194**
PSC63 SDHC R/L 80065-11	PSC 63	65	45	80	3	DC.. 11T3	DC	321,60	**01193**	321,60	**01193**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 666 01195 / 84 667 01195	3,92	**27600**
84 666 01194 / 84 667 01194	3,92	**27600**
84 666 01193 / 84 667 01193	3,92	**27600**

MaxiLock-S – SDNC 62.5° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Neutral

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	84 677 ... EUR Y8	
PSC63 SDNC N 0100-11	PSC 63	100	3	DC.. 11T3	DC	321,60	**01193**
PSC63 SDNC N 0130-11	PSC 63	130	3	DC.. 11T3	DC	321,60	**11193**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 677 01193	3,92	**27600**
84 677 11193	3,92	**27600**

MaxiLock-S – SDUC 93° – Boring bar with screw clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Boring bar with Torx key



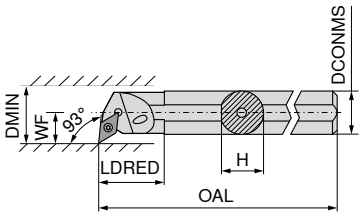

Illustrations show right-hand versions

									Left-hand		Right-hand	
									70 737 ...		**70 736 ...**	
ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	Nm		2A/24		2A/24	
S12Q SDUC R/L 07	12	11,0	180	12,5	9	17	1,2	DC.. 0702	124,50	**012**	124,50	**012**
A12K SDUC R/L 07	12	11,5	125	22,0	9	16	1,2	DC.. 0702	124,50	**212**	124,50	**212**
S16R SDUC R/L 07	16	15,0	200	13,0	11	21	1,2	DC.. 0702	127,20	**016**	127,20	**016**
A16M SDUC R/L 07	16	15,0	150	29,0	11	20	1,2	DC.. 0702	127,20	**216**	127,20	**216**
S20S SDUC R 07	20	18,0	250	20,0	13	25	1,2	DC.. 0702			158,60	**020**
A20Q SDUC R/L 07	20	18,5	180	32,0	13	25	1,2	DC.. 0702	158,60	**220**	158,60	**220**
S20S SDUC R 11	20	18,0	250	20,0	13	25	3,2	DC.. 11T3			158,60	**120**
A20Q SDUC R/L 11	20	19,0	180	32,0	13	25	3,2	DC.. 11T3	158,60	**320**	158,60	**320**
S25T SDUC R/L 11	25	23,0	300		17	32	3,2	DC.. 11T3	182,30	**125**	182,30	**125**
A25R SDUC R/L 11	25	24,0	200	36,0	17	32	3,2	DC.. 11T3	182,30	**325**	182,30	**325**
S32U SDUC R 11	32	30,0	350		22	40	3,2	DC.. 11T3			250,60	**132**
A32S SDUC R/L 11	32	31,0	250	50,0	22	40	3,2	DC.. 11T3	250,60	**332**	250,60	**332**
A40T SDUC R/L 11	40	39,0	300	60,0	27	50	3,2	DC.. 11T3	301,00	**340**	301,00	**340**

Key D

Combination Key

Clamping screw

Solid Carbide Seat D

Threaded sleeve

	80 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.	**EUR** Y7		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28	
70 736 012 / 70 737 012	10,05	**110**			2,99	**13800**				
70 736 212 / 70 737 212	10,05	**110**			2,99	**13800**				
70 736 016 / 70 737 016	10,05	**110**			2,99	**13800**				
70 736 216 / 70 737 216	10,05	**110**			2,99	**13800**				
70 736 020	10,05	**110**			2,99	**13800**				
70 736 220 / 70 737 220	10,05	**110**			2,99	**13800**				
70 736 120	11,96	**113**			4,14	**110**				
70 736 320 / 70 737 320	11,96	**113**			4,14	**110**				
70 736 125 / 70 737 125			10,66	**398**	4,14	**113**	9,66	**106**	5,98	**171**
70 736 325 / 70 737 325	11,96	**113**			4,14	**113**				
70 736 132			10,66	**398**	4,14	**113**	9,66	**106**	5,98	**171**
70 736 332 / 70 737 332			10,66	**398**	4,14	**113**	9,66	**106**	5,98	**171**
70 736 340 / 70 737 340			10,66	**398**	4,14	**113**	9,66	**106**	5,98	**171**

MaxiLock-S – SDUC 93° – Boring bar with screw clamping

▲ with carbide core

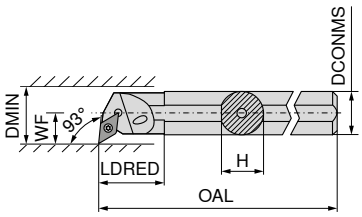

Illustrations show right-hand versions



ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 739 ... EUR 2A		Right-hand 70 738 ... EUR 2A	
E-A10H SDUC R/L 07	10	9	100	28,0	8	13	1,2	DC.. 0702	231,30	**210**	231,30	**210**
E-A12K SDUC R/L 07	12	11	125	18,0	9	18	1,2	DC.. 0702	231,30	**212**	231,30	**212**
E-A16M SDUC R/L 07	16	15	150	30,0	11	22	1,2	DC.. 0702	367,80	**216**	367,80	**216**
E-A20Q SDUC R/L 07	20	18	180	38,0	13	26	1,2	DC.. 0702	461,10	**220**	461,10	**220**
E-A20Q SDUC R/L 11	20	18	180	38,0	13	26	3,2	DC.. 11T3	488,10	**320**	488,10	**320**
E-A25R SDUC R/L 11	25	23	200	40,0	17	34	3,2	DC.. 11T3	703,10	**225**	703,10	**225**
E-A32S SDUC R/L 11	32	30	250	39,5	22	39	3,2	DC.. 11T3	1.032,00	**232**	1.032,00	**232**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 738 210 / 70 739 210	10,05	**110**	2,99	**13800**
70 738 212 / 70 739 212	10,05	**110**	2,99	**13800**
70 738 216 / 70 739 216	10,05	**110**	2,99	**13800**
70 738 220 / 70 739 220	10,05	**110**	2,99	**13800**
70 738 320 / 70 739 320	11,96	**113**	4,06	**449**
70 738 225 / 70 739 225	11,96	**113**	4,06	**449**
70 738 232 / 70 739 232	11,96	**113**	4,06	**449**

MaxiLock-S – SDUC 93° – Boring bar with screw clamping

▲ with carbide core

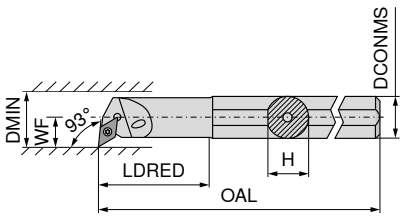

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 739 ... EUR 2A		Right-hand 70 738 ... EUR 2A	
E-A0810H SDUC R/L 07	10	9	100	22	7	12,5	1,2	DC.. 0702	288,10	**410**	288,10	**410**
E-A1012K SDUC R/L 07	12	11	125	28	9	15,5	1,2	DC.. 0702	288,10	**412**	288,10	**412**
E-A1216M SDUC R/L 07	16	15	150	36	11	19,5	1,2	DC.. 0702	288,10	**416**	288,10	**416**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 738 410 / 70 739 410	10,05	**110**	2,99	**13800**
70 738 412 / 70 739 412	10,05	**110**	2,99	**13800**
70 738 416 / 70 739 416	10,05	**110**	2,99	**13800**

MaxiLock-S – SDUC 93° – Boring bar with screw clamping

▲ Type: Solid carbide

Scope of supply:

Boring bar with Torx key



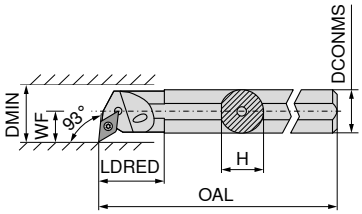

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 739 ... EUR 2A/24		Right-hand 70 738 ... EUR 2A/24	
E12Q SDUC R/L 07	12	11,5	180	26	9	16	1,2	DC.. 0702	429,60	**012**	429,60	**012**
E16R SDUC R/L 07	16	15,0	200	34	11	20	1,2	DC.. 0702	561,40	**016**	561,40	**016**
E20S SDUC R/L 11	20	18,5	250	38	13	25	3,2	DC.. 11T3	701,20	**120**	701,20	**120**
E25T SDUC R/L 11	25	23,0	300	43	17	32	3,2	DC.. 11T3	1.236,00	**125**	1.236,00	**125**

Key D

Clamping screw

Spare parts for Article no.	Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
70 739 012 / 70 738 012	10,05	**110**	2,99	**13800**
70 739 016 / 70 738 016	10,05	**110**	2,99	**13800**
70 739 120 / 70 738 120	11,96	**113**	4,06	**304**
70 739 125 / 70 738 125	11,96	**113**	4,14	**113**

9

MaxiLock-S – SDQC 107.5° – Boring bar with screw clamping

Scope of supply:

Boring bar with Torx key



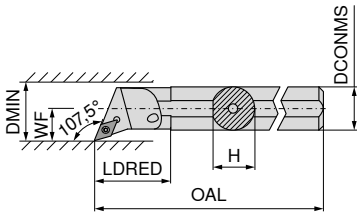

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 741 ... EUR 2A		Right-hand 70 740 ... EUR 2A	
A10H SDQC R/L 07	10	9,0	100	22	7	12,5	1,2	DC.. 0702	122,10	**210**	122,10	**210**
A12K SDQC R/L 07	12	11,5	125	22	9	16,0	1,2	DC.. 0702	124,50	**212**	124,50	**212**
A16M SDQC R/L 07	16	15,0	150	29	11	20,0	1,2	DC.. 0702	127,20	**216**	127,20	**216**
A20Q SDQC R/L 07	20	18,5	180	32	13	25,0	1,2	DC.. 0702	158,60	**220**	158,60	**220**
A25R SDQC R/L 11	25	23,0	200	36	17	32,0	3,2	DC.. 11T3	182,30	**225**	182,30	**225**
A32S SDQC R/L 11	32	30,0	250	50	22	40,0	3,2	DC.. 11T3	250,60	**232**	250,60	**232**
A40T SDQC R/L 11	40	38,0	300	60	27	50,0	3,2	DC.. 11T3	301,00	**240**	301,00	**240**

Key D

Combination Key

Clamping screw

Solid Carbide Seat D

Threaded sleeve

Spare parts for Article no.	Key D 80 950 ... EUR Y7		Combination Key 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat D 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 740 210 / 70 741 210	10,05	**110**			2,99	**13800**				
70 740 212 / 70 741 212	10,05	**110**			2,99	**13800**				
70 740 216 / 70 741 216	10,05	**110**			2,99	**13800**				
70 740 220 / 70 741 220	10,05	**110**			2,99	**13800**				
70 740 225 / 70 741 225			10,66	**398**	4,14	**113**				
70 740 232 / 70 741 232			10,66	**398**	4,14	**113**	9,66	**106**	5,98	**171**
70 740 240 / 70 741 240			10,66	**398**	4,14	**113**	9,66	**106**	5,98	**171**

MaxiLock-S – SDQC 107.5° – Boring bar with screw clamping

▲ with carbide core

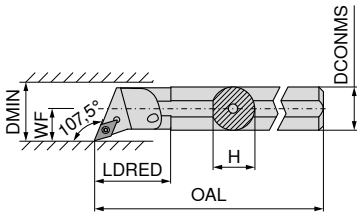

Illustrations show right-hand versions



ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	Left-hand 70 751 ... EUR 2A		Right-hand 70 750 ... EUR 2A	
	mm	mm	mm	mm	mm	mm	Nm					
E-A12K SDQC R/L 07	12	11	125	24	9	18	1,2	DC.. 0702	231,30	**012**	231,30	**012**
E-A16M SDQC R/L 07	16	15	150	30	11	22	1,2	DC.. 0702	394,80	**016**	394,80	**016**
E-A20Q SDQC R/L 07	20	18	180	38	13	26	1,2	DC.. 0702	461,10	**020**	461,10	**020**
E-A20Q SDQC R/L 11	20	18	180	45	13	26	3,2	DC.. 11T3	488,10	**120**	488,10	**120**
E-A25R SDQC R/L 11	25	23	200	38	17	34	3,2	DC.. 11T3	780,20	**025**	780,20	**025**
E-A32S SDQC R/L 11	32	30	250	43	22	39	3,2	DC.. 11T3	1.032,00	**032**	1.032,00	**032**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 750 012 / 70 751 012	10,05	**110**	2,99	**13800**
70 750 016 / 70 751 016	10,05	**110**	2,99	**13800**
70 750 020 / 70 751 020	10,05	**110**	2,99	**13800**
70 750 120 / 70 751 120	11,96	**113**	4,06	**449**
70 750 025 / 70 751 025	11,96	**113**	4,06	**449**
70 750 032 / 70 751 032	11,96	**113**	4,06	**449**

MaxiLock-S – SDQC 107.5° – Boring bar with screw clamping

▲ with carbide core

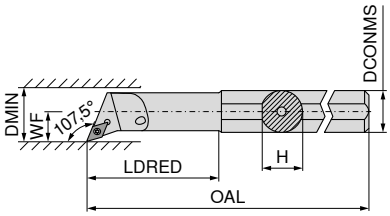

Illustrations show right-hand versions

ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	Left-hand 70 751 ... EUR 2A		Right-hand 70 750 ... EUR 2A	
	mm	mm	mm	mm	mm	mm	Nm					
E-A0810H SDQC R/L 07	10	9	100	22	7	12,5	1,2	DC.. 0702	288,10	**210**	288,10	**210**
E-A1012K SDQC R/L 07	12	11	125	28	9	15,5	1,2	DC.. 0702	288,10	**212**	288,10	**212**
E-A1216M SDQC R/L 07	16	15	150	36	11	19,5	1,2	DC.. 0702	288,10	**216**	288,10	**216**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 750 210 / 70 751 210	10,05	**110**	2,99	**13800**
70 750 212 / 70 751 212	10,05	**110**	2,99	**13800**
70 750 216 / 70 751 216	10,05	**110**	2,99	**13800**

MaxiLock-S – SDXC 93° – Boring bar with screw clamping

Scope of supply:
Boring bar with Torx key





Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	LF mm	OAL mm	LU mm	WF mm	DMIN mm	CDX mm	torque moment Nm	Insert	Left-hand 70 733 ... EUR 2A/24		Right-hand 70 732 ... EUR 2A/24	
A12K SDXC R/L 07	12	11,5	125	137,0	24	9	16	4,5	1,2	DC.. 0702	124,50	**212**	124,50	**212**
A16M SDXC R/L 07	16	15,0	150	162,0	36	11	20	4,5	1,2	DC.. 0702	127,20	**216**	127,20	**216**
A20Q SDXC R/L 11	20	18,5	180	196,5	40	13	25	6,5	3,2	DC.. 11T3	158,60	**220**	158,60	**220**
A25R SDXC R/L 11	25	23,0	200	216,8	50	17	32	9,5	3,2	DC.. 11T3	182,30	**225**	182,30	**225**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 733 212 / 70 732 212	10,05	**110**	2,99	**13800**
70 733 216 / 70 732 216	10,05	**110**	2,99	**13800**
70 733 220 / 70 732 220	11,96	**113**	4,06	**304**
70 733 225 / 70 732 225	11,96	**113**	4,06	**304**

9

MaxiLock-S – SDUC 93° – Boring bar with screw clamping

Scope of supply:
Boring bar with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	LH mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 566 ... EUR 2D/80		Right-hand 74 565 ... EUR 2D/80	
HSK T63 40L SDUC R/L 11	HSK-T 63	140	114	40	27	50	3.2	DC.. 11T3	394,60	**511**	394,60	**511**

Combination Key

Clamping screw

Solid Carbide Seat D

Threaded sleeve

Spare parts for Article no.		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
74 565 511 / 74 566 511	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	9,66	**106**	M3,5	5,98	**171**

RCMT / RCGT / RCMX

Designation	S mm	D1 mm	IC mm
RCGT 0602..	2,38	2,8	6
RCGT 0803..	3,18	3,4	8
RC.T 1003..	3,18	4,0	10
RCMT 10T3..	3,97	4,4	10
RCMT 1204..	4,76	4,9	12
RCMT 1606..	6,35	5,3	16
RCMT 2006..	6,35	6,5	20
RCMT 2507..	7,94	7,2	25
RCMX 2507..	7,94	10,5	25



RCMT / RCGT

		NEW	NEW	NEW	NEW	NEW	NEW
		-SMF CTCK110	-SM CTCP115-P	-SM CTCP115-P	-SM CTCP115-P	-SM CTCP125-P	-SM CTCP125-P	-SM CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	M	M	M	M	M	M
		RCMT	RCGT	RCMT	RCMT	RCGT	RCMT	RCGT
		70 188 ...	76 185 ...	76 186 ...	76 264 ...	76 262 ...	76 264 ...	76 262 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
0602M0EN	3,0					10,61 50201		10,61 70201
0803M0EN	4,0		11,81 30401			11,81 51201		11,81 71201
1003M0SN	5,0						10,23 51401	
1204M0SN	6,0				12,12 32801		12,12 52601	
1606M0EN	8,0	23,85 038						
1606M0SN	8,0				23,85 34001		23,85 53801	
2006M0SN	10,0			32,80 35001			32,80 55001	
2507M0SN	12,5				52,82 36201		52,82 56201	
P		○	●	●	●	●	●	●
M								○
K		●	○	○	○	○	○	
N								
S								
H								
O								

RCMT / RCMX

	NEW	NEW	NEW	NEW	NEW	NEW	NEW
	-SM CTCP135-P	-M23 CTCP115-P	-M23 CTCP115-P	-M23 CTCP115-P	-M23 CTCP125-P	-SM CTCM120	-SM CTPM125
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
	M	M	M	M	M	M	M
	RCMT	RCMT	RCMX	RCMT	RCMT	RCMT	RCMT
	76 264 ...	74 117 ...	74 117 ...	74 121 ...	74 121 ...	75 221 ...	75 221 ...
ISO / RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
1003M0SN 5,0	10,23 71401			10,23 21400		10,23 11400	
10T3M0SN 5,0							
1204M0SN 6,0	12,12 72601			12,12 22600	12,12 62600		
1606M0SN 8,0	23,85 73801			23,85 23800	23,85 63800		
2006M0SN 10,0	32,80 75001	32,80 25000			32,80 65000		32,80 25000
2507M0SN 12,5	52,82 76201		52,82 25400				
2507MOSN 12,5							52,82 26200
P	●	●	●	●	●	○	○
M	○					●	●
K		○	○	○	○		
N							
S							
H							
O							

9

RCGT / RCMT

				NEW	
	-25P H210T	-27 H10T	-SM CTPX710	-27 CTPX715
			DRAGONSKIN	DRAGONSKIN
	F	M	M	M
	RCGT	RCGT	RCMT	RCGT
	70 241 ...	70 266 ...	75 221 ...	70 266 ...
ISO / RE mm	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90
0602M0FN 3		7,92 600		12,78 70200
0803M0FN 4	9,22 60200	8,85 602		10,34 80200
1003M0FN 5		8,85 604		10,34 80400
1003M0SN 5			10,23 61400	
1204M0FN 6				12,09 72800
P			●	●
M			●	●
K	○	○		○
N	●	●	○	●
S	○		●	●
H				
O	○	○		○

RCGW / RCGT

Designation	S mm	D1 mm	IC mm
RCG. 0602..	2,38	2,8	6
RCGW 0803..	3,18	3,4	8
RCGW 1003..	3,18	4,4	10
RCGT 10T3..	3,97	4,4	10
RCGW 1204..	4,76	4,4	12

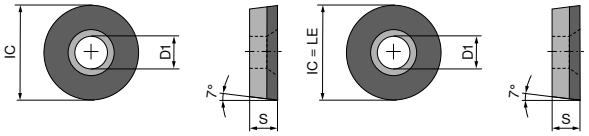

RCGT F RCGW F

RCGW / RCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPD20		-CB1 CTDPD20		CTDPS30		-CB1 CTDPS30		-CB2 CTDPS30	
				F		F		F		F		M	
				DIAMOND RCGW		DIAMOND RCGT		DIAMOND RCGW		DIAMOND RCGT		DIAMOND RCGT	
				71 179 ...		71 315 ...		71 179 ...		71 315 ...		71 316 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
0602M0FN	3	F	6	134,40	10001	187,40	102	134,40	20001	187,40	202	187,40	202
0803M0FN	4	F	8	174,20	10101			174,20	20101				
1003M0FN	6	F	10	225,00	10201								
10T3M0FN	5	F	10			245,80	104			245,80	204	245,80	204
1204M0FN	6	F	12	284,80	10301								
P													
M													
K													
N				●		●		●		●		●	
S													
H													
O				●		●		●		●		●	

MaxiLock-S – SRDC 0° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

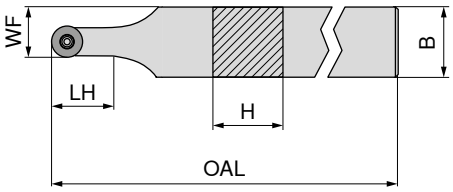



NEW
Neutral

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	70 646 ... EUR 2A/24	
SRDC N 1212 F06	12	12	80	12,0	9,0	1,2	RC.. 0602	91,06	**01200**
SRDC N 1616 H06	16	16	100	12,0	11,0	1,2	RC.. 0602	96,12	**01600**
SRDC N 2020 K06	20	20	125	12,0	13,0	1,2	RC.. 0602	107,20	**02000**
SRDC N 2525 M06	25	25	150	12,4	15,5	1,2	RC.. 0602	111,30	**02500**
SRDC N 1616 H08	16	16	100	16,0	12,0	1,8	RC.. 0803	96,12	**11600**
SRDC N 2020 K08	20	20	125	16,5	14,0	1,8	RC.. 0803	107,20	**12000**
SRDC N 2525 M08	25	25	150	16,5	16,5	1,8	RC.. 0803	111,30	**12500**
SRDC N 1616 H10	16	16	100	20,9	13,0	3,2	RC.. 1003 / RC.. 10T3	96,12	**21600**
SRDC N 2020 K10	20	20	125	20,0	15,0	3,2	RC.. 1003 / RC.. 10T3	107,20	**22000**
SRDC N 2525 M10	25	25	150	20,9	17,5	3,2	RC.. 1003 / RC.. 10T3	111,30	**22500**

When using WSP RC .. 10T3 indexable inserts, use insert seat article no. 70 950 92100.

	Key D		Clamping screw		Solid carbide support R		Threaded sleeve	
	80 950 ...		70 950 ...		70 950 ...		70 950 ...	
Spare parts for Article no.	EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 646 01200	8,11	**039**	5,38	**857**				
70 646 01600	8,11	**039**	5,38	**857**				
70 646 02000	8,11	**039**	5,38	**857**				
70 646 02500	8,11	**039**	5,38	**857**				
70 646 11600	11,13	**118**	4,14	**819**				
70 646 12000	11,13	**118**	4,14	**819**				
70 646 12500	11,13	**118**	4,14	**819**				
70 646 21600	11,79	**120**	4,82	**87900**	15,94	**117**	5,98	**171**
70 646 22000	11,79	**120**	4,82	**87900**	15,94	**117**	5,98	**171**
70 646 22500	11,79	**120**	4,82	**87900**	15,94	**117**	5,98	**171**

MaxiLock-S – SRDC 0° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



NEW

Neutral

70 775 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	
SRDC N 1212 F06 DC	12	12	80	26	9,0	M6	M6	1,2	RC.. 0602	212,30	**01200**
SRDC N 1616 H06 DC	16	16	100	30	11,0	M6	G1/8"	1,2	RC.. 0602	214,80	**01600**
SRDC N 2020 K06 DC	20	20	125	30	13,0	M6	G1/8"	1,2	RC.. 0602	201,70	**02000**
SRDC N 2525 M06 DC	25	25	150	30	15,5	M6	G1/8"	1,2	RC.. 0602	209,40	**02500**
SRDC N 1616 H08 DC	16	16	100	30	12,0	M6	G1/8"	1,8	RC.. 0803	214,80	**11600**
SRDC N 2020 K08 DC	20	20	125	30	14,0	M6	G1/8"	1,8	RC.. 0803	201,70	**12000**
SRDC N 2525 M08 DC	25	25	150	31	16,5	M6	G1/8"	1,8	RC.. 0803	209,40	**12500**
SRDC N 1616 H10 DC	16	16	100	30	13,0	M6	G1/8"	3,2	RC.. 1003 / RC.. 10T3	214,80	**21600**
SRDC N 2020 K10 DC	20	20	125	30	15,0	M6	G1/8"	3,2	RC.. 1003 / RC.. 10T3	201,70	**22000**
SRDC N 2525 M10 DC	25	25	150	36	17,5	M6	G1/8"	3,2	RC.. 1003 / RC.. 10T3	209,40	**22500**

When using WSP RC .. 10T3 indexable inserts, use insert seat article no. 70 950 92100.

Clamping screw

Solid carbide support R

Grubscrew

Grubscrew

Threaded sleeve

70 950 ... | **70 950 ...** | **70 950 ...** | **70 950 ...** | **70 950 ...**

Spare parts for Article no.	EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 775 01200	5,38	**857**					3,84	**86700**		
70 775 01600	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 775 02000	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 775 02500	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 775 11600	4,14	**819**			2,19	**88000**	3,84	**86700**		
70 775 12000	4,14	**819**			2,19	**88000**	3,84	**86700**		
70 775 12500	4,14	**819**			2,19	**88000**	3,84	**86700**		
70 775 21600	4,82	**87900**	15,94	**117**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 775 22000	4,82	**87900**	15,94	**117**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 775 22500	4,82	**87900**	15,94	**117**	2,19	**88000**	3,84	**86700**	5,98	**171**

Sealing plugs DC

Key D

O-Ring

Coolant nozzle DC

Coolant screw plug

70 950 ... | **80 950 ...** | **70 950 ...** | **70 950 ...** | **70 950 ...**

Spare parts for Article no.	EUR 2A/28		EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 775 01200			8,11	**039**						
70 775 01600	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 02000	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 02500	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 11600	1,53	**87600**	11,13	**118**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 12000	1,53	**87600**	11,13	**118**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 12500	1,53	**87600**	11,13	**118**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 21600	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 22000	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 775 22500	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-N – PRDC 0° – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key

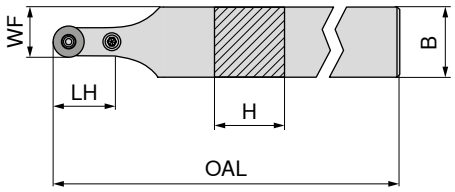

Neutral

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	70 544 ... EUR 2A/24	
PRDC N 2525 M12	25	25	150	24	18,5	3	RC.. 1204	113,40	**025**
PRDC N 3225 P12	32	25	170	24	18,5	3	RC.. 1204	119,40	**032**
PRDC N 3225 P16	32	25	170	28	20,5	4	RC.. 1606	119,40	**132**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid carbide support R

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 544 025	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	20,01	**178**	4,12	**208**	9,14	**215**
70 544 032	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	20,01	**178**	4,12	**208**	9,14	**215**
70 544 132	SW3	3,15	**176**	1,76	**196**	1,57	**192**	20,70	**387**	4,52	**390**	16,23	**384**

MaxiLock-N – PRDC 0° – Toolholder with lever clamping

9

Scope of supply:
Tool holder with allen key

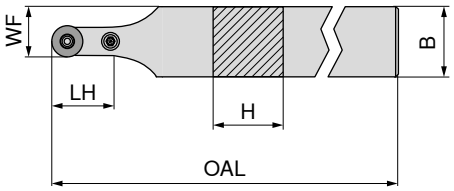

Neutral

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	70 545 ... EUR 2A/24	
PRDC N 3232 P20	32	32	170	32	26,0	5	RC.. 2006	147,40	**23200**
PRDC N 4040 S25	40	40	250	42	32,5	6	RCMT 2507 / RCMX 2507	183,30	**40400**

Key I

Shim

Assembly pin

Lever

Clamping screw

Solid carbide support R

Spare parts for Article no.	70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 545 23200	3,15	**177**	1,45	**391**	1,57	**394**	19,63	**28100**	4,43	**28500**	21,97	**27400**
70 545 40400	3,32	**396**	2,27	**392**	1,57	**395**	24,18	**28400**	9,63	**28600**	41,19	**27500**

MaxiLock-N – PRDC 0° DC – Toolholder with lever clamping

Scope of supply:

Tool holder with allen key





NEW

Neutral

70 595 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	
PRDC N 2020 X12-T DC	20	20	132	63	16,0	M6	G1/8"	3	RC.. 1204	214,80	**02000**
PRDC N 2525 X12-T DC	25	25	152	68	18,5	M6	G1/8"	3	RC.. 1204	226,10	**02500**
PRDC N 3225 X12-T DC	32	25	168	68	18,5	M6	G1/8"	3	RC.. 1204	237,40	**03200**
PRDC N 3225 X16-T DC	32	25	172	72	20,5	M6	G1/8"	4	RC.. 1606	237,40	**13200**
PRDC N 3232 X20-T DC	32	32	176	76	26,0	M6	G1/8"	5	RC.. 2006	248,70	**23200**
PRDC N 4040 X25-T DC	40	40	216	91	32,5	M6	G1/8"	6	RCMT 2507 / RCMX 2507	271,30	**04000**

	Key I	Shim	Assembly pin	Coolant screw plug	Lever	Clamping screw	Solid carbide support R	Grubscrew
	70 950 ...	**70 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 595 02000	3,15 **175**	2,27 **197**	1,57 **191**	4,59 **294**	20,01 **178**	4,12 **208**	9,14 **215**	3,84 **86700**
70 595 02500	3,15 **175**	2,27 **197**	1,57 **191**	4,59 **294**	20,01 **178**	4,12 **208**	9,14 **215**	3,84 **86700**
70 595 03200	3,15 **175**	2,27 **197**	1,57 **191**	4,59 **294**	20,01 **178**	4,12 **208**	9,14 **215**	3,84 **86700**
70 595 13200	3,15 **175**	1,76 **196**	1,57 **192**	4,59 **294**	20,70 **387**	4,52 **390**	16,23 **384**	3,84 **86700**
70 595 23200	3,15 **177**	1,45 **391**	1,57 **394**	4,59 **294**	19,63 **28100**	4,43 **28500**	21,97 **27400**	3,84 **86700**
70 595 04000	3,32 **396**	2,27 **392**	1,57 **395**	4,59 **294**	24,18 **28400**	9,63 **28600**	41,19 **27500**	3,84 **86700**

MaxiLock-S – SRGC – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

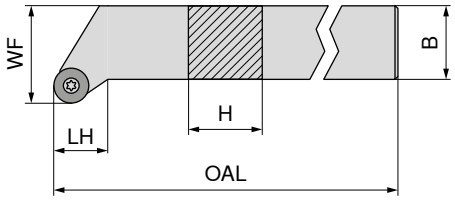

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 647 ... EUR 2A/24		NEW Right-hand 70 647 ... EUR 2A/24	
SRGC R/L 1212 F06	12	12	80	12,5	16	1,2	RC.. 0602	91,06	**01200**	91,06	**01201**
SRGC R 1616 H06	16	16	100	12,5	20	1,2	RC.. 0602			96,12	**01601**
SRGC R/L 2020 K06	20	20	125	15,0	25	1,2	RC.. 0602	107,20	**02000**	107,20	**02001**
SRGC R/L 2525 M06	25	25	150	18,5	32	1,2	RC.. 0602	111,30	**02500**	111,30	**02501**
SRGC R/L 1616 H08	16	16	100	13,6	20	1,8	RC.. 0803	96,12	**11600**	96,12	**11601**
SRGC R 2020 K08	20	20	125	16,1	25	1,8	RC.. 0803			107,20	**12001**
SRGC R/L 2525 M08	25	25	150	19,6	32	1,8	RC.. 0803	111,30	**12500**	111,30	**12501**
SRGC R/L 2020 K10	20	20	125	16,1	25	3,2	RC.. 1003 / RC.. 10T3	107,20	**22000**	107,20	**22001**
SRGC R/L 2525 M10	25	25	150	19,6	32	3,2	RC.. 1003 / RC.. 10T3	111,30	**22500**	111,30	**22501**

When using WSP RC .. 10T3 indexable inserts, use insert seat article no. 70 950 92100.

Key D

Clamping screw

Solid carbide support R

Threaded sleeve

Spare parts for Article no.		80 950 ... EUR Y7			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
70 647 01200 / 70 647 01201	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 647 01601	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 647 02000 / 70 647 02001	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 647 02500 / 70 647 02501	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**					
70 647 11600 / 70 647 11601	T09 - IP	11,13	**118**	M3x7 - IP	4,14	**819**					
70 647 12001	T09 - IP	11,13	**118**	M3x7 - IP	4,14	**819**					
70 647 12500 / 70 647 12501	T09 - IP	11,13	**118**	M3x7 - IP	4,14	**819**					
70 647 22000 / 70 647 22001	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	15,94	**117**	M3,5	5,98	**171**
70 647 22500 / 70 647 22501	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	15,94	**117**	M3,5	5,98	**171**

MaxiLock-N – PRDC 0° – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key



ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Neutral 74 548 ... EUR 2D/80	
HSK T63 PRDC N 12	HSK-T 63	70	53	0	3	RC.. 1204 M0	289,80	**512**
HSK T100 PRDC N 12	HSK-T 100	80	88	0	3	RC.. 1204 M0	330,20	**712**
HSK T100 PRDC N 16	HSK-T 100	80	88	0	4	RC.. 1606 M0	330,20	**716**

Spare parts for Article no.		Key I 70 950 ... EUR 2A/28		Shim 70 950 ... EUR 2A/28		Assembly pin 70 950 ... EUR 2A/28		Lever 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid carbide support R 70 950 ... EUR 2A/28	
74 548 512	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	20,01	**178**	4,12	**208**	9,14	**215**
74 548 712	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	20,01	**178**	4,12	**208**	9,14	**215**
74 548 716	SW3	3,15	**176**	1,76	**196**	1,57	**192**	20,70	**387**	4,52	**390**	16,23	**384**

MaxiLock-N – PRSC – Toolholder with lever clamping

Scope of supply:
Tool holder with allen key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 552 ... EUR 2D/80		Right-hand 74 551 ... EUR 2D/80	
HSK T63 PRSC R/L 12	HSK-T 63	70	44	53	45	100	3	RC.. 1204 M0	289,80	**512**	289,80	**512**
HSK T100 PRSC R/L 12	HSK-T 100	80	57	88	55	106	3	RC.. 1204 M0	330,20	**712**	330,20	**712**
HSK T100 PRSC R/L 16	HSK-T 100	80	55	88	55	125	4	RC.. 1606 M0	330,20	**716**	330,20	**716**

Spare parts for Article no.		Key I 70 950 ... EUR 2A/28		Shim 70 950 ... EUR 2A/28		Assembly pin 70 950 ... EUR 2A/28		Lever 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid carbide support R 70 950 ... EUR 2A/28	
74 551 512 / 74 552 512	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	20,01	**178**	4,12	**208**	9,14	**215**
74 551 712 / 74 552 712	SW2,5	3,15	**175**	2,27	**197**	1,57	**191**	20,01	**178**	4,12	**208**	9,14	**215**
74 551 716 / 74 552 716	SW3	3,15	**176**	1,76	**196**	1,57	**192**	20,70	**387**	4,52	**390**	16,23	**384**

SCGT / SCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
SC.T 09T3..	9,52	3,97	4,4	9,52
SC.T 1204..	12,70	4,76	5,5	12,70



SCGT / SCMT

		-CF05 CTEP110	-CF55 CTEP110	-SF TCM10	NEW -SF CTCP115-P	NEW -SF CTCP125-P	NEW -SMF CTCP115-P	NEW -SMF CTCP135-P
		DRAGONSKIN	DRAGONSKIN		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	F
		CERMET SCGT	CERMET SCMT	CERMET SCGT	SCMT	SCMT	SCMT	SCMT
		76 261 ...	76 260 ...	70 271 ...	76 187 ...	76 269 ...	76 267 ...	76 267 ...
ISO	RE mm	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
09T304EN	0,4	19,86 004	12,73 004	18,22 902		12,76 50401	12,76 30401	
09T308EN	0,8	19,86 006	12,73 006	18,22 904	12,76 30601	12,76 50601	12,76 30601	
120408EN	0,8					17,96 51801		17,96 71801
P		●	●	●	●	●	●	●
M		○	○	○				○
K		○	○	○	○	○	○	
N								
S								
H								
O								

9

SCMT

		-SM CTCK110	-SM CTCK120	NEW -SM CTCP115-P	NEW -SM CTCP125-P	NEW -SM CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
		M	M	M	M	M
		SCMT	SCMT	SCMT	SCMT	SCMT
		70 268 ...	70 268 ...	76 268 ...	76 268 ...	76 268 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
09T304EN	0,4	12,76 004	12,76 504	12,76 30401	12,76 50401	12,76 70401
09T308EN	0,8	12,76 006	12,76 506	12,76 30601	12,76 50601	12,76 70601
120408EN	0,8	17,96 018	17,96 518	17,96 31801	17,96 51801	17,96 71801
120412EN	1,2	17,96 020	17,96 520		17,96 52001	
P		○	○	●	●	●
M						○
K		●	●	○	○	
N						
S						
H						
O						

SCMT

		NEW	NEW			
		-M25 CTPM125	-SM CTPM125	-M55 CTCM120	-M55 CTPM125	-M55 CTCM130
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		F	M	M	M	M
		SCMT	SCMT	SCMT	SCMT	SCMT
		75 222 ...	75 049 ...	75 216 ...	75 216 ...	75 216 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
09T304EN	0,4	12,76 70400				
09T308EN	0,8		12,76 20600	12,76 10600	12,76 206	12,76 30600
120408EN	0,8		17,96 21800	17,96 11800	17,96 218	17,96 31800
P		○	○	○	○	○
M		●	●	●	●	●
K						
N						
S						○
H						
O						

SCGT

		-25P H210T	-25P CTPX710	-27 CTPX715	-27 H10T
			DRAGONSKIN	DRAGONSKIN	
		F	M	M	M
		SCGT	SCGT	SCGT	SCGT
		70 283 ...	70 283 ...	70 270 ...	70 270 ...
ISO	RE mm	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90
09T304FN	0,4			17,91 80400	14,34 600
09T308FN	0,8			17,91 80600	14,34 602
120408FN	0,8	17,50 634	20,74 71600	20,31 71800	16,76 604
P			●	●	
M			●	●	
K		○		○	○
N		●	●	●	●
S		○	●	●	
H					
O		○		○	○

SCGW / SCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
SCG. 09T3..	9,52	3,97	4,4	9,52
SCG. 1204..	12,70	4,76	5,5	12,70



SCGT A



SCGT A



SCGW A



SCGW A

SCGW / SCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPD20		CTDPD20		-CB1 CTDPD20		CTDPS30		CTDPS30	
				F		F		F		F		F	
				DIAMOND SCGW		DIAMOND SCGW		DIAMOND SCGT		DIAMOND SCGW		DIAMOND SCGT	
				71 182 ...		71 183 ...		71 320 ...		71 182 ...		71 180 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
09T304FN	0,4	A (1)	9,52			108,80	10001						
09T304FN	0,4	A (1)	4,40	74,00	10001			82,00	114	74,00	20601	74,00	20001
09T308FN	0,8	A (1)	9,52			108,80	10101						
09T308FN	0,8	A (1)	4,30	74,00	10101			82,00	118			74,00	20101
09T312FN	1,2	A (1)	4,20	74,00	10201							74,00	20201
120404FN	0,4	A (1)	12,70			120,40	10201						
120404FN	0,4	A (1)	4,40	81,00	10301								
120408FN	0,8	A (1)	4,30	81,00	10401								
120408FN	0,8	A (1)	12,70			120,40	10301						
120412FN	1,2	A (1)	4,20	81,00	10501								
120412FN	1,2	A (1)	12,70			120,40	10401						
P													
M													
K													
N				●		●		●		●		●	
S													
H													
O				●		●		●		●		●	

9

SCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPS30		-CB2 CTDPS30		-CB3 CTDPU20	
				F		M		R	
				DIAMOND SCGT		DIAMOND SCGT		DIAMOND SCGT	
				71 181 ...		71 321 ...		71 322 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0	
09T304FN	0,4	A (1)	4,4			82,00	214	82,00	214
09T308FN	0,8	A (1)	9,5	108,80	20001				
09T308FN	0,8	A (1)	4,3			82,00	218	82,00	218
120408FN	0,8	A (1)	12,7	120,40	20101				
120412FN	1,2	A (1)	12,0	120,40	20201				
P									
M									
K									
N					●		●		●
S									
H									
O					●		●		●

MaxiLock-S – SSDC 45° – Toolholder with screw clamping

Scope of supply:

Tool holder with Torx key

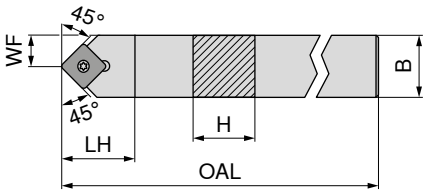



NEW

Neutral

70 651 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	EUR 2A/24	
SSDC N 1212 F09	12	12	80	16	6,0	3,2	SC.. 09T3..	80,94	**01200**
SSDC N 1616 H09	16	16	100	20	8,0	3,2	SC.. 09T3..	101,20	**01600**
SSDC N 2020 K09	20	20	125	20	10,0	3,2	SC.. 09T3..	107,20	**02000**
SSDC N 1616 H12	16	16	100	25	8,0	5	SC.. 1204..	101,20	**11600**
SSDC N 2020 K12	20	20	125	25	10,0	5	SC.. 1204..	107,20	**12000**
SSDC N 2525 M12	25	25	150	25	12,5	5	SC.. 1204..	111,30	**12500**

	Key D	Clamping screw	Solid Carbide support S	Threaded sleeve
	80 950 ...	**70 950 ...**	**70 950 ...**	**70 950 ...**
Spare parts for Article no.	EUR Y7	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 651 01200	11,79 **120**	4,82 **87900**		
70 651 01600	11,79 **120**	4,82 **87900**		
70 651 02000	11,79 **120**	4,82 **87900**	12,46 **167**	5,98 **171**
70 651 11600	11,79 **120**	3,84 **820**	15,94 **168**	5,98 **170**
70 651 12000	11,79 **120**	3,84 **820**	15,94 **168**	5,98 **170**
70 651 12500	11,79 **120**	3,84 **820**	15,94 **168**	5,98 **170**

9

MaxiLock-S – SSDC 45° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



NEW

Neutral

70 776 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	
SSDC N 1212 F09 DC	12	12	80	25	12,8	M6	M6	3,2	SC.. 09T3..	171,30	**01200**
SSDC N 1616 H09 DC	16	16	100	30	16,0	M6	G1/8"	3,2	SC.. 09T3..	190,30	**01600**
SSDC N 2020 K09 DC	20	20	125	30	20,0	M6	G1/8"	3,2	SC.. 09T3..	201,70	**02000**
SSDC N 1616 H12 DC	16	16	100	29	17,3	M6	G1/8"	5	SC.. 1204..	190,30	**11600**
SSDC N 2020 K12 DC	20	20	125	30	20,0	M6	G1/8"	5	SC.. 1204..	201,70	**12000**
SSDC N 2525 M12 DC	25	25	150	30	25,0	M6	G1/8"	5	SC.. 1204..	209,40	**02500**

	Clamping screw	Solid Carbide support S	Grubscrew	Grubscrew	Threaded sleeve
	70 950 ...	**70 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**
Spare parts for Article no.	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 776 01200	4,82 **87900**			3,84 **86700**	
70 776 01600	4,82 **87900**	12,46 **167**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 776 02000	4,82 **87900**	12,46 **167**	2,19 **88000**	3,84 **86700**	5,98 **171**
70 776 11600	3,84 **820**	15,94 **168**	2,19 **88000**	3,84 **86700**	5,98 **170**
70 776 12000	3,84 **820**	15,94 **168**	2,19 **88000**	3,84 **86700**	5,98 **170**
70 776 02500	3,84 **820**	15,94 **168**	2,19 **88000**	3,84 **86700**	5,98 **170**

	Sealing plugs DC	Key D	O-Ring	Coolant nozzle DC	Coolant screw plug
	70 950 ...	**80 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**
Spare parts for Article no.	EUR 2A/28	EUR Y7	EUR 2A/28	EUR 2A/28	EUR 2A/28
70 776 01200		11,79 **120**			
70 776 01600	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 776 02000	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 776 11600	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 776 12000	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**
70 776 02500	1,53 **87600**	11,79 **120**	1,36 **88100**	30,13 **87700**	4,59 **294**

MaxiLock-S – SSSC 45° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

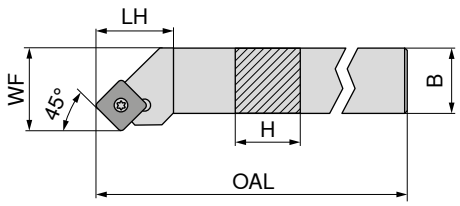

Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	torque moment	Insert	NEW Left-hand 70 654 ... EUR 2A/24		NEW Right-hand 70 654 ... EUR 2A/24	
	mm	mm	mm	mm	mm	Nm					
SSSC R/L 1212 F09	12	12	80	18	16	3,2	SC.. 09T3..	80,94	**01200**	80,94	**01201**
SSSC R/L 1616 H09	16	16	100	20	20	3,2	SC.. 09T3..	101,20	**01600**	101,20	**01601**
SSSC R/L 2020 K09	20	20	125	20	25	3,2	SC.. 09T3..	107,20	**02000**	107,20	**02001**
SSSC R/L 1616 H12	16	16	100	25	20	5	SC.. 1204..	101,20	**11600**	101,20	**11601**
SSSC R/L 2020 K12	20	20	125	25	25	5	SC.. 1204..	107,20	**12000**	107,20	**12001**
SSSC R/L 2525 M12	25	25	150	25	32	5	SC.. 1204..	111,30	**12500**	111,30	**12501**
SSSC R 3225 P12	32	25	170	25	32	5	SC.. 1204..			116,40	**13201**

Key D

Clamping screw

Solid Carbide support S

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 654 01201 / 70 654 01200	11,79	**120**	4,82	**87900**				
70 654 01601 / 70 654 01600	11,79	**120**	4,82	**87900**	12,46	**167**	5,98	**171**
70 654 02001 / 70 654 02000	11,79	**120**	4,82	**87900**	12,46	**167**	5,98	**171**
70 654 11601 / 70 654 11600	11,79	**120**	3,84	**820**	15,94	**168**	5,98	**170**
70 654 12001 / 70 654 12000	11,79	**120**	3,84	**820**	15,94	**168**	5,98	**170**
70 654 12501 / 70 654 12500	11,79	**120**	3,84	**820**	15,94	**168**	5,98	**170**
70 654 13201	11,79	**120**	3,84	**820**	15,94	**168**	5,98	**170**

MaxiLock-S – SSSC 45° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

										NEW Left-hand		NEW Right-hand	
										70 777 ...		70 777 ...	
ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	EUR		EUR	
	mm	mm	mm	mm	mm			Nm		2A/24		2A/24	
SSSC R/L 1212 F09 DC	12	12	86,5	22	16,0	M6	M6	3,2	SC.. 09T3..	171,30	**01201**	171,30	**01200**
SSSC R/L 1616 H09 DC	16	16	106,5	30	20,0	M6	G1/8"	3,2	SC.. 09T3..	190,30	**01601**	190,30	**01600**
SSSC R/L 2020 K09 DC	20	20	131,5	30	25,0	M6	G1/8"	3,2	SC.. 09T3..	201,70	**02001**	201,70	**02000**
SSSC R/L 1616 H12 DC	16	16	108,5	30	20,0	M6	G1/8"	5	SC.. 1204..	190,30	**11601**	190,30	**11600**
SSSC R/L 2020 K12 DC	20	20	133,5	30	25,0	M6	G1/8"	5	SC.. 1204..	201,70	**12001**	201,70	**12000**
SSSC R/L 2525 M12 DC	25	25	158,5	32	32,0	M6	G1/8"	5	SC.. 1204..	209,40	**02501**	209,40	**02500**
SSSC L 3225 P 12 DC	32	25	178,5	32	32,1	G1/8"	G1/8"	5	SC.. 1204..	219,80	**03201**		

Clamping screw

Solid Carbide support S

Grubscrew

Grubscrew

Threaded sleeve

	70 950 ...		70 950 ...		70 950 ...		70 950 ...		70 950 ...	
Spare parts for Article no.	EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 777 01200 / 70 777 01201	4,14	**859**					3,84	**86700**		
70 777 01600 / 70 777 01601	4,82	**87900**	12,46	**167**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 777 02000 / 70 777 02001	4,82	**87900**	12,46	**167**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 777 11600 / 70 777 11601	3,84	**820**	15,94	**168**	2,19	**88000**	3,84	**86700**	5,98	**170**
70 777 12000 / 70 777 12001	3,84	**820**	15,94	**168**	2,19	**88000**	3,84	**86700**	5,98	**170**
70 777 02500 / 70 777 02501	3,84	**820**	15,94	**168**	2,19	**88000**	3,84	**86700**	5,98	**170**
70 777 03201	3,84	**820**	15,94	**168**	2,19	**88000**			5,98	**170**

Sealing plugs DC

Key D

O-Ring

Coolant nozzle DC

Coolant screw plug

	70 950 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...	
Spare parts for Article no.	EUR 2A/28		EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 777 01200 / 70 777 01201			11,79	**120**						
70 777 01600 / 70 777 01601	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 777 02000 / 70 777 02001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 777 11600 / 70 777 11601	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 777 12000 / 70 777 12001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 777 02500 / 70 777 02501	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 777 03201	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-S – SSBC 75° – Toolholder with screw clamping

Scope of supply:
Tool holder with blind plug and Torx key

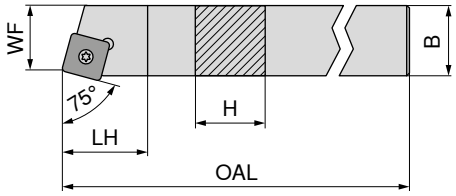

Illustrations show right-hand versions



								NEW Left-hand 70 650 ... EUR 2A/24		NEW Right-hand 70 650 ... EUR 2A/24	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert				
SSBC R/L 2020 K12	20	20	125	20	17	5	SC.. 1204..	107,20	**12000**	107,20	**12001**
SSBC R/L 2525 M12	25	25	150	20	22	5	SC.. 1204..	111,30	**12500**	111,30	**12501**

Key D

Clamping screw

Solid Carbide support S

Threaded sleeve

	Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide support S 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
Spare parts for Article no.								
70 650 12001 / 70 650 12000	11,79	**120**	3,84	**820**	15,94	**168**	5,98	**170**
70 650 12501 / 70 650 12500	11,79	**120**	3,84	**820**	15,94	**168**	5,98	**170**

MaxiLock-S – SSKC 75° – Toolholder with screw clamping

9

Scope of supply:
Tool holder with blind plug and Torx key

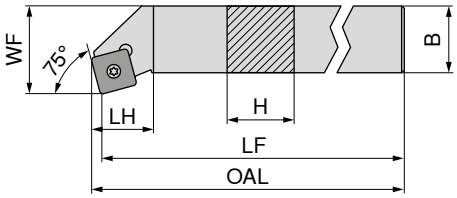

Illustrations show right-hand versions

									Left-hand 70 669 ... EUR 2A/24		Right-hand 70 668 ... EUR 2A/24	
ISO designation	H mm	B mm	LF mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert				
SSKC R/L 1616 H09	16	16	100	102,3	22	20	3,2	SC.. 09T3..	103,10	**016**	103,10	**016**
SSKC R/L 2020 K09	20	20	125	127,3	22	25	3,2	SC.. 09T3..	109,60	**020**	109,60	**020**
SSKC R 2020 K12	20	20	125	127,3	23	25	5	SC.. 1204..			109,60	**120**
SSKC R 2525 M12	25	25	150	153,3	23	32	5	SC.. 1204..			113,40	**125**

Key D

Combination Key

Clamping screw

Solid Carbide support S

Threaded sleeve

	Key D 80 950 ... EUR Y7		Combination Key 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide support S 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
Spare parts for Article no.										
70 668 016 / 70 669 016	11,96	**113**	10,66	**398**	4,14	**113**	12,46	**167**	5,98	**171**
70 668 020 / 70 669 020	11,96	**113**	10,66	**398**	4,14	**113**	12,46	**167**	5,98	**171**
70 668 120	11,96	**113**	10,66	**398**	3,38	**114**	15,94	**168**	5,98	**170**
70 668 125	11,96	**113**	10,66	**398**	3,38	**114**	15,94	**168**	5,98	**170**

MaxiLock-S – SSSC 45° – Boring bar with screw clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Tool holder with Torx key

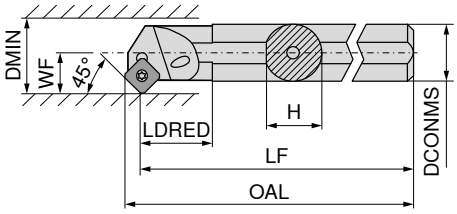

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	LF mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 721 ... EUR 2A/24		Right-hand 70 720 ... EUR 2A/24	
S16R SSSC R 09	16	15,00	200	206,0	13,97	11	20	3,2	SC.. 09T3..			127,20	**016**
A16M SSSC R/L 09	16	15,25	150	156,0	29,00	11	20	3,2	SC.. 09T3..	127,20	**216**	127,20	**216**
A20Q SSSC R/L 09	20	19,00	180	186,0	32,00	13	25	3,2	SC.. 09T3..	158,60	**220**	158,60	**220**
A25R SSSC R/L 09	25	24,50	200	206,0	36,00	17	32	3,2	SC.. 09T3..	182,30	**225**	182,30	**225**
A32S SSSC R/L 12	32	31,00	250	258,3	50,00	22	40	5	SC.. 1204..	250,60	**232**	250,60	**232**
A40T SSSC R/L 12	40	39,00	300	308,1	60,00	27	50	5	SC.. 1204..	301,00	**240**	301,00	**240**

Key D

Combination Key

Clamping screw

Solid Carbide support S

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 720 016	11,96	**113**			4,14	**110**				
70 720 216 / 70 721 216	11,96	**113**			4,14	**110**				
70 720 220 / 70 721 220	11,96	**113**			4,06	**304**				
70 720 225 / 70 721 225	11,96	**113**			4,06	**304**				
70 720 232 / 70 721 232			10,66	**398**	3,38	**114**	15,94	**168**	5,98	**170**
70 720 240 / 70 721 240			10,66	**398**	3,38	**114**	15,94	**168**	5,98	**170**

MaxiLock-S – SSKC 75° – Boring bar with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	LF mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 725 ... EUR 2A/24		Right-hand 70 724 ... EUR 2A/24	
A16M SSKC R/L 09	16	15,0	150	152,4	29	11	20	3,2	SC.. 09T3..	127,20	**216**	127,20	**216**
A20Q SSKC R/L 09	20	18,5	180	182,4	32	13	25	3,2	SC.. 09T3..	158,60	**220**	158,60	**220**
A25R SSKC R/L 09	25	23,0	200	202,4	36	17	32	3,2	SC.. 09T3..	182,30	**225**	182,30	**225**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
70 724 216 / 70 725 216	T15	11,96	**113**	M3,5x7,2	4,14	**110**
70 724 220	T15	11,96	**113**	M3,5x8,6	4,06	**304**
70 725 220	T15	11,96	**113**	M3,5x8,6	4,06	**304**
70 724 225 / 70 725 225	T15	11,96	**113**	M3,5x8,6	4,06	**304**

TCGT / TCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
TCMT 0902..	9,6	2,38	2,50	5,56
TC.T 1102..	11,0	2,38	2,80	6,35
TC.T 16T3..	16,5	3,97	4,40	9,52
TCMT 2204..	22,0	4,76	5,16	12,70



TCGT / TCMT

		-CF05 CTEP110		-CF55 CTEP110		-SF TCM10		-SMF TCM10		NEW -SF CTCP125-P		NEW -SMF CTCP115-P		NEW -SMF CTCP135-P	
		DRAGONSKIN		DRAGONSKIN						DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
															
		F		F		F		F		F		F		F	
		CERMET TCGT		CERMET TCMT		CERMET TCGT		CERMET TCMT		TCMT		TCMT		TCMT	
		76 272 ...		76 266 ...		70 273 ...		70 284 ...		76 275 ...		76 284 ...		76 284 ...	
ISO	RE	EUR 1A/78		EUR 1A/78		EUR 1A/78		EUR 1A/78		EUR 1A/08		EUR 1A/08		EUR 1A/08	
	mm														
110202EN	0,2	17,80	014			16,47	900								
110204EN	0,4	17,80	016	10,14	016	16,47	902	9,57	902	10,04	51601				
110208EN	0,8	17,80	018							10,04	51801	10,04	31801	10,04	71801
16T304EN	0,4	22,55	028			20,87	906			14,51	52801	14,51	32801		
16T308EN	0,8			14,07	030					14,51	53001	14,51	33001		
P		●		●		●		●		●		●		●	
M		○		○		○		○						○	
K		○		○		○		○		○		○			
N															
S															
H															
O															

9

TCGT / TCMT

		NEW			NEW	NEW	NEW	NEW
		-SM CTCP135-P	-SM CTCK110	-SM CTCK120	-SM CTCP115-P	-SM CTCP115-P	-SM CTCP125-P	-SM CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		M	M	M	M	M	M	M
		TCGT	TCMT	TCMT	TCMT	TCMT	TCMT	TCMT
		76 270 ...	70 274 ...	70 274 ...	76 189 ...	76 274 ...	76 274 ...	76 274 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
090204EN	0,4						10,04 50401	10,04 70401
110202EN	0,2	17,80 71401						
110204EN	0,4		10,04 016	10,04 516		10,04 31601	10,04 51601	10,04 71601
110208EN	0,8		10,04 018	10,04 518		10,04 31801		10,04 71801
16T304EN	0,4		14,51 028	14,51 528		14,51 32801	14,51 52801	14,51 72801
16T308EN	0,8		14,51 030	14,51 530		14,51 33001	14,51 53001	14,51 73001
16T312EN	1,2		14,51 032	14,51 532				
220408EN	0,8				20,87 34201		20,87 54201	20,87 74201
P		●	○	○	●	●	●	●
M		○						○
K			●	●	○	○	○	
N								
S								
H								
O								

TCMT

		NEW				NEW	
		-F43 CTCM130	-M25 CTCM120	-M25 CTPM125	-M25 CTCM130	-SM CTPM125	-M55 CTCM120
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		F	F	F	F	M	M
		TCMT	TCMT	TCMT	TCMT	TCMT	TCMT
		75 033 ...	75 217 ...	75 217 ...	75 217 ...	75 050 ...	75 218 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
090204EN	0,4			10,04 20400		10,04 20400	10,04 10400
110204EN	0,4	10,04 31600	10,04 11600	10,04 216	10,04 31600	10,04 21600	10,04 11600
16T304EN	0,4	14,51 32800	13,81 12800	14,51 228	14,51 32800	14,51 22800	
16T308EN	0,8	14,51 33000	13,81 13000	14,51 230	14,51 33000	14,51 23000	14,51 13000
220408EN	0,8					20,87 24200	
220412EN	1,2					20,87 24400	
P		○	○	○	○	○	○
M		●	●	●	●	●	●
K							
N							
S		○			○		
H							
O							

TCMT / TCGT

		-M55 CTPM125 DRAGONSKIN		-M55 CTCM130 DRAGONSKIN		-27 H10T		-27 CTPX715 DRAGONSKIN	
		M TCMT		M TCMT		M TCGT		M TCGT	
		75 218 ...		75 218 ...		70 276 ...		70 276 ...	
ISO	RE mm	EUR 1A/08		EUR 1A/08		EUR 1A/90		EUR 1A/90	
090204EN	0,4	10,04	204	10,04	30400				
110202FN	0,2					14,34	600	17,06	71400
110204EN	0,4	10,04	216	10,04	31600				
110204FN	0,4					14,34	602	17,91	81600
16T302FN	0,2					16,89	604		
16T304FN	0,4					16,89	606	20,01	72800
16T308EN	0,8	14,51	230	14,51	33000				
16T308FN	0,8					16,89	608	21,02	83000
P		○		○				●	
M		●		●				●	
K							○	○	
N							●	●	
S				○				●	
H									
O							○	○	

9

TCGW / TCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
TCG. 0902..	9,6	2,38	2,5	5,56
TCG. 1102..	11,0	2,38	2,8	6,35
TCG. 16T3..	16,5	3,97	4,4	9,52



TCGT A



TCGT A



TCGW A



TCGW F



TCGW A

TCGW / TCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPD20		CTDPD20		CTDPD20		CTDPD20		-CB1 CTDPD20		CTDPS30	
				F		F		F		F		F		F	
				DIAMOND TCGW		DIAMOND TCGW		DIAMOND TCGW		DIAMOND TCGT		DIAMOND TCGT		DIAMOND TCGT	
				71 188 ...		71 187 ...		71 140 ...		71 184 ...		71 325 ...		71 184 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
090202FN	0,2	A (1)	3,7					64,00	100			72,00	112	64,00	20001
090204FN	0,4	A (1)	3,4					64,00	102			72,00	114	64,00	20101
090208FN	0,8	A (1)	3,0					64,00	104	64,00	10001				
090208FN	0,8	A (1)	9,6	97,30	10001										
110202FN	0,2	A (1)	3,7					74,00	106	74,00	10101	82,00	122		
110202FN	0,2	F	11,0			219,60	10001								
110204FN	0,4	A (1)	3,4					74,00	108	74,00	10201	82,00	124	74,00	20201
110204FN	0,4	F	11,0			219,60	10101								
110204FN	0,4	A (1)	11,0	102,20	10101										
110208FN	0,8	A (1)	3,0					74,00	110	74,00	10301				
110208FN	0,8	A (1)	11,0	102,20	10201										
16T304FN	0,4	A (1)	4,6					81,00	112	81,00	10401	81,00	134	81,00	20301
16T304FN	0,4	A (1)	16,5	135,20	10301										
16T308FN	0,8	A (1)	4,2					81,00	114	81,00	10501	81,00	13600		
16T308FN	0,8	A (1)	16,5	135,20	10401										
16T312FN	1,2	A (1)	3,8					81,00	11600						
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

TCGW / TCGT

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDPS30		CTDPS30		-CB2 CTDPS30		CTDPU20		-CB3 CTDPU20		CTDCD10	
				F		F		M		F		R		F	
				DIAMOND TCGW		DIAMOND TCGT		DIAMOND TCGT		DIAMOND TCGW		DIAMOND TCGT		DIAMOND TCGW	
				71 186 ...		71 185 ...		71 326 ...		71 188 ...		71 327 ...		71 186 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
090202FN	0,2	A (1)	3,7	64,00	20001			72,00	212						
090204FN	0,4	A (1)	3,4					72,00	214						
090204FN	0,4	A (1)	9,6			97,30	20001								
110202FN	0,2	A (1)	2,6											90,28	40001
110202FN	0,2	A (1)	3,7	74,00	20101			82,00	222						
110204FN	0,4	A (1)	2,3											90,28	40101
110204FN	0,4	A (1)	3,4	74,00	20201			82,00	224			82,00	224		
110204FN	0,4	A (1)	11,0			102,20	20101			95,65	30001				
110208FN	0,8	A (1)	2,0											90,28	40201
110208FN	0,8	A (1)	11,0			102,20	20201								
16T304FN	0,4	A (1)	2,3											98,82	40301
16T304FN	0,4	A (1)	4,6					81,00	234						
16T304FN	0,4	A (1)	16,5			135,20	20301								
16T308FN	0,8	A (1)	2,0											98,82	40401
16T308FN	0,8	A (1)	4,2									81,00	238		
16T308FN	0,8	A (1)	16,5			135,20	20401								
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

9

MaxiLock-S – STGC 90° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

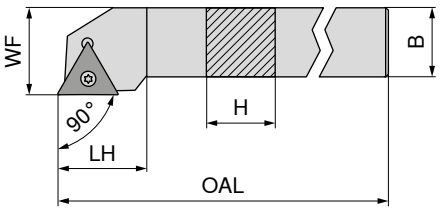



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 659 ... EUR 2A/24		NEW Right-hand 70 659 ... EUR 2A/24	
STGC R/L 1212 F11	12	12	80	15	16	1,2	TC.. 1102	80,94	**01200**	80,94	**01201**
STGC R/L 1616 H16	16	16	100	22	20	3,2	TC.. 16T3	101,20	**01600**	101,20	**01601**
STGC R/L 2020 K16	20	20	125	22	25	3,2	TC.. 16T3	107,20	**02000**	107,20	**02001**
STGC R/L 2525 M16	25	25	150	22	32	3,2	TC.. 16T3	111,30	**02500**	111,30	**02501**

Key D

Clamping screw

Solid Carbide Seat T

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 659 01201 / 70 659 01200	8,11	**039**	5,38	**857**				
70 659 01601 / 70 659 01600	11,79	**120**	4,82	**87900**	10,01	**169**	5,98	**171**
70 659 02001 / 70 659 02000	11,79	**120**	4,82	**87900**	10,01	**169**	5,98	**171**
70 659 02501 / 70 659 02500	11,79	**120**	4,82	**87900**	10,01	**169**	5,98	**171**

MaxiLock-S – STGC 90° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	NEW Left-hand 70 778 ... EUR 2A/24		NEW Right-hand 70 778 ... EUR 2A/24	
STGC R/L 1212 F11 DC	12	12	80	17,1	16	M6	M6	1,2	TC.. 1102	171,30	**01201**	171,30	**01200**
STGC R/L 1616 H16 DC	16	16	100	30,0	20	M6	G1/8"	3,2	TC.. 16T3	190,30	**01601**	190,30	**01600**
STGC R/L 2020 K16 DC	20	20	125	28,0	25	M6	G1/8"	3,2	TC.. 16T3	201,70	**02001**	201,70	**02000**
STGC R/L 2525 M16 DC	25	25	150	30,0	32	M6	G1/8"	3,2	TC.. 16T3	209,40	**02501**	209,40	**02500**

Spare parts for Article no.	Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat T 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 778 01200 / 70 778 01201	5,38	**857**					3,84	**86700**		
70 778 01600 / 70 778 01601	4,82	**87900**	10,01	**169**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 778 02000 / 70 778 02001	4,82	**87900**	10,01	**169**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 778 02500 / 70 778 02501	4,82	**87900**	10,01	**169**	2,19	**88000**	3,84	**86700**	5,98	**171**

Spare parts for Article no.	Sealing plugs DC 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		O-Ring 70 950 ... EUR 2A/28		Coolant nozzle DC 70 950 ... EUR 2A/28		Coolant screw plug 70 950 ... EUR 2A/28	
70 778 01200 / 70 778 01201			8,11	**039**						
70 778 01600 / 70 778 01601	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 778 02000 / 70 778 02001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 778 02500 / 70 778 02501	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-S – STAC 90° – Toolholder with screw clamping

▲ for sliding head lathes

Scope of supply:

Tool holder with Torx key

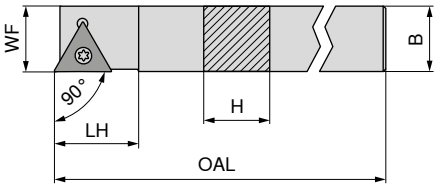

Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 655 ... EUR 2A/24		NEW Right-hand 70 655 ... EUR 2A/24	
STAC R/L 1212 K11	12	12	125	15	12	1,2	TC.. 1102	91,06	**01200**	91,06	**01201**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
70 655 01201 / 70 655 01200	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**

MaxiLock-S – STFC 90° – Toolholder with screw clamping

Scope of supply:

Tool holder with Torx key

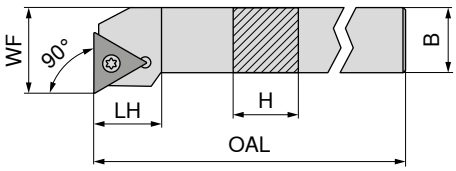

Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 658 ... EUR 2A/24		NEW Right-hand 70 658 ... EUR 2A/24	
STFC R/L 1212 F11	12	12	80	15	16	1,2	TC.. 1102	80,94	**01200**	80,94	**01201**
STFC R/L 1616 H16	16	16	100	20	20	3,2	TC.. 16T3	101,20	**01600**	101,20	**01601**
STFC R/L 2020 K16	20	20	125	20	25	3,2	TC.. 16T3	107,20	**02000**	107,20	**02001**
STFC R/L 2525 M16	25	25	150	20	32	3,2	TC.. 16T3	111,30	**02500**	111,30	**02501**

Key D

Clamping screw

Solid Carbide Seat T

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 658 01200 / 70 658 01201	8,11	**039**	5,38	**857**				
70 658 01600 / 70 658 01601	11,79	**120**	4,82	**87900**	10,01	**169**	5,98	**171**
70 658 02000 / 70 658 02001	11,79	**120**	4,82	**87900**	10,01	**169**	5,98	**171**
70 658 02500 / 70 658 02501	11,79	**120**	4,82	**87900**	10,01	**169**	5,98	**171**

MaxiLock-S – STCC 90° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

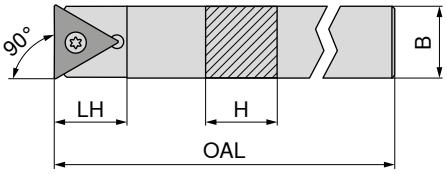



NEW
Neutral

ISO designation	H mm	B mm	OAL mm	LH mm	torque moment Nm	Insert	70 657 ... EUR 2A/24	
STCC N 0808 K09	8	8	125	11	1	TC.. 0902	75,87	**00800**
STCC N 1010 K11	10	10	125	15	1,2	TC.. 1102	80,94	**01000**
STCC N 1212 K11	12	12	125	15	1,2	TC.. 1102	91,06	**01200**
STCC N 1414 K11	14	14	125	21	1,2	TC.. 1102	91,06	**01400**
STCC N 1616 K11	16	16	125	24	1,2	TC.. 1102	101,20	**01600**

Key D

Clamping screw

Spare parts for Article no.	80 950 ...	EUR Y7		70 950 ...	EUR 2A/28	
70 657 00800	T07 - IP	10,26	**117**	M2,2x5 - IP	4,19	**856**
70 657 01000	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**
70 657 01200	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**
70 657 01400	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**
70 657 01600	T08 - IP	8,11	**039**	M2,5x6 - IP	5,38	**857**

9

MaxiLock-S – STFC 90° – Boring bar with screw clamping

▲ A... = with thro' coolant
▲ S... = without thro' coolant

Scope of supply:
Boring bar with Torx key



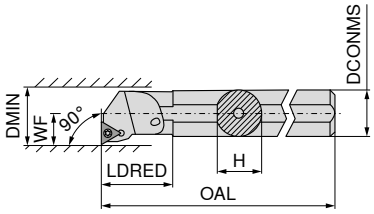

Illustrations show right-hand versions

									Left-hand		Right-hand	
									70 729 ...		**70 728 ...**	
ISO designation	DCONMS	H	OAL	LDRED	WF	DMIN	torque moment	Insert	**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	Nm		2A/24		2A/24	
A10H STFC R/L 09	10	9,5	100	19	7	13	1	TC.. 0902	124,50	**210**	124,50	**210**
A12K STFC R/L 11	12	11,5	125	22	9	16	1,2	TC.. 1102	124,50	**212**	124,50	**212**
A16M STFC R/L 11	16	15,0	150	29	11	20	1,2	TC.. 1102	127,20	**216**	127,20	**216**
S16R STFC R 11	16	15,0	200	21	11	21	1,2	TC.. 1102			127,20	**016**
S20S STFC R 11	20	18,0	250	15	13	25	1,2	TC.. 1102			158,60	**020**
A20Q STFC R/L 11	20	18,5	180	32	13	25	1,2	TC.. 1102	158,60	**220**	158,60	**220**
A25R STFC R/L 16	25	24,0	200	36	17	32	3,2	TC.. 16T3	182,30	**225**	182,30	**225**
A32S STFC R/L 16	32	31,0	250	50	22	40	3,2	TC.. 16T3	250,60	**232**	250,60	**232**
A40T STFC R/L 16	40	39,0	300	60	27	50	3,2	TC.. 16T3	301,00	**240**	301,00	**240**

Clamping screw

Solid Carbide Seat T

Threaded sleeve

									70 950 ...		**70 950 ...**	
Spare parts for Article no.									**EUR** 2A/28		**EUR** 2A/28	
70 728 020								M2,5x6 - T08	2,99	**13800**		
70 729 210 / 70 728 210								M2,2x5	3,32	**111**		
70 728 016								M2,5x6 - T08	2,99	**13800**		
70 729 212 / 70 728 212								M2,5x6 - T08	2,99	**13800**		
70 729 216 / 70 728 216								M2,5x6 - T08	2,99	**13800**		
70 729 220 / 70 728 220								M2,5x6 - T08	2,99	**13800**		
70 729 225 / 70 728 225								M3,5x11	4,14	**113**	10,01	**169**
70 729 232 / 70 728 232								M3,5x11	4,14	**113**	10,01	**169**
70 729 240 / 70 728 240								M3,5x11	4,14	**113**	10,01	**169**

Key D

Combination Key

											80 950 ...	
Spare parts for Article no.											**EUR** Y7	
70 728 020									T08		10,05	**110**
70 729 210 / 70 728 210									T07		10,05	**109**
70 728 016									T08		10,05	**110**
70 729 212 / 70 728 212									T08		10,05	**110**
70 729 216 / 70 728 216									T08		10,05	**110**
70 729 220 / 70 728 220									T08		10,05	**110**
70 729 225 / 70 728 225												
70 729 232 / 70 728 232												
70 729 240 / 70 728 240												

											70 950 ...	
Spare parts for Article no.											**EUR** 2A/28	
70 728 020												
70 729 210 / 70 728 210												
70 728 016												
70 729 212 / 70 728 212												
70 729 216 / 70 728 216												
70 729 220 / 70 728 220												
70 729 225 / 70 728 225										T15/SW	10,66	**398**
70 729 232 / 70 728 232										T15/SW	10,66	**398**
70 729 240 / 70 728 240										T15/SW	10,66	**398**

VCGT / VCMT / VCET

Designation	L	S	D1	IC
	mm	mm	mm	mm
VC.T 1103..	11,1	3,18	2,9	6,35
VC.T 1604..	16,6	4,76	4,4	9,52
VCGT 2205..	22,1	5,56	5,5	12,70



VCGT / VCMT

		-CF05 CTEP110	-CF55 CTEP110	-SF TCM407	-SF TCM10	-SMF TCM10	NEW -SF CTCP115-P	NEW -SF CTCP115-P
		DRAGONSKIN	DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	F
		CERMET VCGT	CERMET VCMT	CERMET VCGT	CERMET VCGT	CERMET VCMT	VCMT	VCGT
		76 276 ...	76 292 ...	70 277 ...	70 277 ...	70 288 ...	76 279 ...	76 277 ...
ISO	RE mm	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/78	EUR 1A/08	EUR 1A/08
110301EN	0,1				20,15 892			
110302EN	0,2	22,08 014		20,15 844	20,15 894			21,03 31401
110304EN	0,4	22,08 016	17,14 016	20,15 846	20,15 896	16,19 896		21,03 31601
110308EN	0,8							21,03 31801
160404EN	0,4	26,33 028	21,03 028	25,44 850	25,44 900	20,01 900	21,03 32801	
160408EN	0,8	26,33 030	21,03 030		25,44 902	20,01 902	21,03 33001	
P		●	●	●	●	●	●	●
M		○	○	○	○	○		
K		○	○	○	○	○	○	○
N								
S								
H								
O								

9

VCGT / VCMT

		NEW -SF CTCP125-P	NEW -SF CTCP125-P	NEW -SF CTCP135-P	NEW -SF CTCP135-P	NEW -SMF CTCP115-P	NEW -SMF CTCP125-P	NEW -SMF CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		F	F	F	F	F	F	F
		VCGT	VCMT	VCGT	VCMT	VCMT	VCMT	VCGT
		76 277 ...	76 279 ...	76 277 ...	76 279 ...	76 288 ...	76 288 ...	76 285 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110302EN	0,2	21,03 51401		21,03 71401				21,03 71401
110304EN	0,4	21,03 51601		21,03 71601		18,09 31601	18,09 51601	
110308EN	0,8	21,03 51801		21,03 71801				
160404EN	0,4		21,03 52801		21,03 72801	21,03 32801	21,03 52801	
160408EN	0,8		21,03 53001			21,03 33001	21,03 53001	
P		●	●	●	●	●	●	●
M				○	○			○
K		○	○			○	○	
N								
S								
H								
O								

VCMT

		NEW				NEW	NEW	NEW
		-SMF CTCP135-P	-SM CTCK110	-SM CTCK120	-SM CTCP115-P	-SM CTCP125-P	-SM CTCP135-P
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		F	M	M	M	M	M
		VCMT	VCMT	VCMT	VCMT	VCMT	VCMT
		76 288 ...	70 278 ...	70 278 ...	76 278 ...	76 278 ...	76 278 ...
ISO	RE mm	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110304EN	0,4	18,09 71601					
160404EN	0,4	21,03 72801	21,03 028	21,03 528	21,03 32801	21,03 52801	21,03 72801
160406EN	0,6				21,03 32901		
160408EN	0,8	21,03 73001	21,03 030	21,03 530	21,03 33001	21,03 53001	21,03 73001
160412EN	1,2		21,03 032	21,03 532	21,03 33201	21,03 53201	21,03 73201
P		●	○	○	●	●	●
M		○					○
K			●	●	○	○	
N							
S							
H							
O							

VCGT / VCMT

			NEW	NEW				NEW	
			-SF CTPM125	-SF CTPM125	-M25 CTCM120	-M25 CTPM125	-M25 CTCM130	-SM CTPM125	-M55 CTCM120
			DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
									
			F	F	F	F	F	M	M
			VCGT	VCMT	VCMT	VCMT	VCMT	VCMT	VCMT
			75 045 ...	75 046 ...	75 219 ...	75 219 ...	75 219 ...	75 051 ...	75 220 ...
ISO	RE mm		EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08	EUR 1A/08
110302EN	0,2		21,03 21400						
110304EN	0,4		21,03 21600						
160404EN	0,4			21,03 22800	21,03 12800	21,03 228	21,03 32800	21,03 22800	21,03 12800
160408EN	0,8			21,03 23000	21,03 13000	21,03 23000	21,03 33000	21,03 23000	21,03 13000
P			○	○	○	○	○	○	○
M			●	●	●	●	●	●	●
K									
N									
S							○		
H									
O									

VCMT / VCGT

		-M55 CTPM125		-M55 CTCM130		-25P H210T		-25P CTPX710		-25Q H210T		NEW -25Q CTPX710	
		DRAGONSKIN		DRAGONSKIN				DRAGONSKIN					
													
		M		M		F		M		M		M	
		VCMT		VCMT		VCGT		VCGT		VCGT		VCGT	
		75 220 ...		75 220 ...		70 282 ...		70 282 ...		70 282 ...		70 282 ...	
ISO	RE mm	EUR 1A/08		EUR 1A/08		EUR 1A/90		EUR 1A/90		EUR 1A/90		EUR 1A/90	
110302FN	0,2					19,86	638	22,80	71400				
110304FL	0,4									22,08	670	26,86	81600
110304FN	0,4					19,86	640	22,80	71600				
110304FR	0,4									22,08	680	26,86	81700
160404EN	0,4	21,03	228	21,03	32800								
160404FN	0,4					24,26	642	28,23	72800				
160408EN	0,8	21,03	230	21,03	33000								
160408FN	0,8					24,26	644	28,23	73000				
160412FN	1,2					24,26	646	28,23	73200				
220530FN	3,0					32,80	648	37,63	75000				
P		○		○				●				●	
M		●		●				●				●	
K						○				○			
N						●		●		●		●	
S				○		○		●		○		●	
H													
O						○				○			

9

VCGT / VCMT / VCET

		-27 H10T	-27 CTPX715 DRAGONSKIN	-29 H216T	NEW -29 CTPX715 DRAGONSKIN	-F05 CTPX710 DRAGONSKIN
						
		M	M	M	M	F
		VCGT	VCGT	VCMT	VCMT	VCET
		70 280 ...	70 280 ...	70 247 ...	70 247 ...	76 255 ...
ISO	RE mm	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1A/08
1103005FN	0,05					30,61 11400
110301FN	0,10					30,61 11600
1103015FN	0,15					30,61 11800
110302FN	0,20	18,95 606	22,22 81400			30,61 12000
160404EN	0,40			17,80 62800	21,33 72800	
110304FN	0,40	18,95 608	22,22 81600			30,61 12200
160404FN	0,40	23,10 612	26,91 82800			
160408EN	0,80			17,80 63000	21,33 73000	
160408FN	0,80	23,10 614	26,91 83000			
110308FN	0,80	18,95 610	25,69 71800			
160412FN	1,20	23,10 616				
160412EN	1,20			17,80 63200	21,33 73200	
220530FN	3,00	31,33 618				
P			●		●	●
M			●		●	●
K		○	○	○	○	
N		●	●	●	●	●
S			●		●	●
H						
O		○	○	○	○	

VCGT / VCGW

Designation	L	S	D1	IC
	mm	mm	mm	mm
VCG. 0702..	6,9	2,38	2,2	3,97
VCG. 1103..	11,1	3,18	2,9	6,35
VCG. 1303..	13,3	3,18	3,4	7,94
VCG. 1604..	16,6	4,76	4,4	9,52

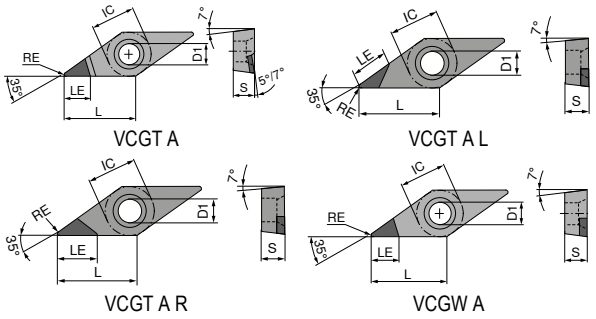

VCGT A | VCGT A L | VCGT A R | VCGW A

VCGT / VCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				CTDMD05		CTDMD05		CTDPD20		CTDPD20		CTDPD20		CTDPD20	
				F		F		F		F		F		F	
				DIAMOND VCGT		DIAMOND VCGW		DIAMOND VCGW		DIAMOND VCGT		DIAMOND VCGT		DIAMOND VCGT	
				71 189 ...		71 160 ...		71 160 ...		71 062 ...		71 063 ...		71 064 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
070202FN	0,2	A (1)		635,90	50001										
070204FN	0,4	A (1)		635,90	50101										
110301FN	0,1	A (1)	5,4							74,00	10100				
110302FN	0,2	A (1)	3,0			469,00	050								
110302FN	0,2	A (1)	4,6	659,60	50201			74,00	100	74,00	100				
110304FN	0,4	A (1)	3,0			469,00	052								
110304FN	0,4	A (1)	3,9	659,60	50301			74,00	102	74,00	102				
110304FR	0,4	A (1)	6,5									80,00	102		
110304FL	0,4	A (1)	6,5											80,00	102
110308FN	0,8	A (1)	3,3					74,00	104	74,00	104				
110308FR	0,8	A (1)	6,0									80,00	104		
110308FL	0,8	A (1)	6,0											80,00	104
160401FN	0,1	A (1)	6,0							81,00	10700				
160402FN	0,2	A (1)	5,9					72,00	105	81,00	105				
160402FN	0,2	A (1)		635,90	50401										
160404FN	0,4	A (1)	5,5					72,00	106	81,00	106				
160404FN	0,4	A (1)		635,90	50501										
160404FR	0,4	A (1)	7,5									86,00	106		
160404FL	0,4	A (1)	7,5											86,00	106
160408FN	0,8	A (1)	5,0			659,60	07800	72,00	108	81,00	108				
160408FR	0,8	A (1)	7,0									86,00	108		
160408FL	0,8	A (1)	7,0											86,00	108
160408FN	0,8	A (1)		635,90	50601										
160412FN	1,2	A (1)	4,5					72,00	110	81,00	110				
160412FR	1,2	A (1)	7,0									86,00	110		
160412FL	1,2	A (1)	7,0											86,00	110
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

9

VCGT / VCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				-CB1 CTDPD20		CTDPS30		CTDPS30		-CB1 CTDPS30		-CB2 CTDPS30		CTDPU20	
															
				F		F		F		F		M		F	
				DIAMOND VCGT		DIAMOND VCGW		DIAMOND VCGT		DIAMOND VCGT		DIAMOND VCGT		DIAMOND VCGW	
				71 330 ...		71 191 ...		71 189 ...		71 330 ...		71 331 ...		71 191 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
070201FN	0,1	A (1)	3,8					64,00	20001						
070202FN	0,2	A (1)	3,6			64,00	20001								
070204FN	0,4	A (1)	3,2			64,00	20101								
110301FN	0,1	A (1)	5,4	82,00	11000	74,00	20201	74,00	20101						
110302FN	0,2	A (1)	4,6	82,00	112	74,00	20301	74,00	20201	82,00	21200	82,00	212		
110304FN	0,4	A (1)	3,9	82,00	114	74,00	20401	74,00	20301	82,00	214	82,00	214		
110308FN	0,8	A (1)	3,3									82,00	21800		
130302FN	0,2	A (1)	5,9			81,00	20501	81,00	20401						
160401FN	0,1	A (1)	6,0			72,00	20601	81,00	20501						
160402FN	0,2	A (1)	5,9	92,94	13200			81,00	20601			92,94	23200		
160404FN	0,4	A (1)	5,5	92,94	134	72,00	20701	81,00	20701	92,94	234	92,94	234	72,00	30001
160408FN	0,8	A (1)	5,0	92,94	138	72,00	20801			92,94	238	92,94	238		
160412FN	1,2	A (1)	4,5	92,94	14000	72,00	20901			92,94	24000	92,94	242		
P															
M															
K															
N				●		●		●		●		●		●	
S															
H															
O				●		●		●		●		●		●	

VCGT / VCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

				-CB2 CTDPU20		-CB3 CTDPU20		CTDCD10		-CB1 CTDCD10		-CB2 CTDCD10	
													
				M		R		F		F		M	
				DIAMOND VCGT		DIAMOND VCGT		DIAMOND VCGW		DIAMOND VCGT		DIAMOND VCGT	
				71 190 ...		71 332 ...		71 191 ...		71 330 ...		71 331 ...	
ISO	RE mm	TCE (NOI)	LE mm	EUR Y0		EUR Y0		EUR Y0		EUR Y0		EUR Y0	
110301FN	0,1	A (1)	3,0							100,00	31000		
110302FN	0,2	A (1)	3,0					90,28	40001	100,00	312	100,00	312
110304FN	0,4	A (1)	3,0					90,28	40101	100,00	314	100,00	314
110304FN	0,4	A (1)	3,9			82,00	214						
110308FN	0,8	A (1)	3,0					90,28	40201				
160402FN	0,2	A (1)	3,0					98,82	40301	113,40	32200	113,40	33200
160404FN	0,4	A (1)	3,0					98,82	40401	113,40	32400	113,40	334
160404FN	0,4	A (1)	5,5	92,94	30001	92,94	234						
160408FN	0,8	A (1)	3,0					98,82	40501	113,40	32600	113,40	338
160412FN	1,2	A (1)	3,0							113,40	32800	113,40	34000
P													
M													
K													
N				●		●		●		●		●	
S													
H													
O				●		●		●		●		●	

9

MaxiLock-S – SVJC 93° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

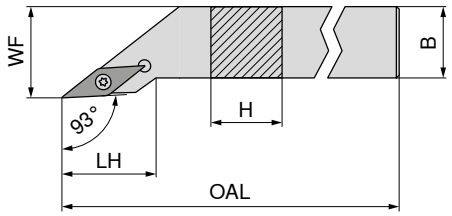



Illustrations show right-hand versions

								NEW Left-hand		NEW Right-hand	
								70 663 ...		**70 663 ...**	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
SVJC R/L 1212 F11	12	12	80	21,6	16	1,2	VC.. 1103	99,92	**01200**	99,92	**01201**
SVJC R/L 1616 H11	16	16	100	21,6	20	1,2	VC.. 1103	111,30	**01600**	111,30	**01601**
SVJC R/L 2020 K11	20	20	125	23,0	25	1,2	VC.. 1103	118,90	**02000**	118,90	**02001**
SVJC R/L 2525 M11	25	25	150	25,5	32	1,2	VC.. 1103	118,90	**02500**	118,90	**02501**
SVJC R/L 2020 K16	20	20	125	29,4	25	3,2	VC.. 1604	118,90	**12000**	118,90	**12001**
SVJC R/L 2525 M16	25	25	150	32,5	32	3,2	VC.. 1604	118,90	**12500**	118,90	**12501**
SVJC R/L 3225 P16	32	25	170	32,5	32	3,2	VC.. 1604	128,90	**13200**	128,90	**13201**

	Key D		Clamping screw		Solid Carbide Seat V		Threaded sleeve	
	80 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**	
Spare parts for Article no.	EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 663 01201 / 70 663 01200	8,11	**039**	5,38	**857**				
70 663 01601 / 70 663 01600	8,11	**039**	5,38	**857**				
70 663 02001 / 70 663 02000	8,11	**039**	5,38	**857**				
70 663 02501 / 70 663 02500	8,11	**039**	5,38	**857**				
70 663 12001 / 70 663 12000	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 663 12501 / 70 663 12500	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 663 13201 / 70 663 13200	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**

MaxiLock-S – SVJC 93° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	NEW Left-hand 70 780 ... EUR 2A/24		NEW Right-hand 70 780 ... EUR 2A/24	
SVJC R/L 1212 F11 DC	12	12	80	30	16	M6	M6	1,2	VC.. 1103	209,40	**01201**	209,40	**01200**
SVJC R/L 1616 H11 DC	16	16	100	27	20	M6	G1/8"	1,2	VC.. 1103	213,60	**01601**	213,60	**01600**
SVJC R/L 2020 K11 DC	20	20	125	39	25	M6	G1/8"	1,2	VC.. 1103	219,80	**02001**	219,80	**02000**
SVJC R/L 2525 M11 DC	25	25	150	41	32	M6	G1/8"	1,2	VC.. 1103	232,10	**02501**	232,10	**02500**
SVJC R/L 2020 K16 DC	20	20	125	39	25	M6	G1/8"	3,2	VC.. 1604	219,80	**12001**	219,80	**12000**
SVJC R/L 2525 M16 DC	25	25	150	41	32	M6	G1/8"	3,2	VC.. 1604	232,10	**12501**	232,10	**12500**
SVJC R/L 3225 P16 DC	32	25	170	41	32	G1/8"	G1/8"	3,2	VC.. 1604	238,20	**03201**	238,20	**03200**

Clamping screw

Solid Carbide Seat V

Grubscrew

Grubscrew

Threaded sleeve

Spare parts for Article no.	70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 780 01200 / 70 780 01201	5,38	**857**					3,84	**86700**		
70 780 01600 / 70 780 01601	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 780 02000 / 70 780 02001	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 780 02500 / 70 780 02501	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 780 12000 / 70 780 12001	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 780 12500 / 70 780 12501	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 780 03200 / 70 780 03201	4,82	**87900**	12,97	**107**	2,19	**88000**			5,98	**171**

Sealing plugs DC

Key D

O-Ring

Coolant nozzle DC

Coolant screw plug

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 780 01200 / 70 780 01201			8,11	**039**						
70 780 01600 / 70 780 01601	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 780 02000 / 70 780 02001	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 780 02500 / 70 780 02501	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 780 12000 / 70 780 12001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 780 12500 / 70 780 12501	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 780 03200 / 70 780 03201	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-S – SVZC 100° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

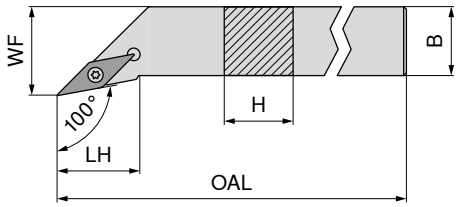

Illustrations show right-hand versions



NEW Left-hand — NEW Right-hand

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	70 667 ... EUR 2A/24		70 667 ... EUR 2A/24	
SVZC R/L 2525 M16	25	25	150	27,3	32	3,2	VC.. 1604	118,90	**02500**	118,90	**02501**

Key D

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 667 02500 / 70 667 02501	T15 - IP	11,79	**120**	M3,5x11	4,82	**87900**	12,97	**107**	M3,5	5,98	**171**

MaxiLock-S – SVZC 100° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions



										NEW Left-hand 70 783 ... EUR 2A/24		NEW Right-hand 70 783 ... EUR 2A/24	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert				
SVZC R/L 2525 M16 DC	25	25	150	38	32	M6	G1/8"	3,2	VC.. 1604	232,10	**02501**	232,10	**02500**

Clamping screw

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	4,82	**87900**

Solid Carbide Seat V

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	12,97	**107**

Grubscrew

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	2,19	**88000**

Grubscrew

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	3,84	**86700**

Threaded sleeve

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	5,98	**171**

Sealing plugs DC

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	1,53	**87600**

Key D

80 950 ...

EUR Y7

Spare parts for Article no.		
70 783 02500 / 70 783 02501	11,79	**120**

O-Ring

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	1,36	**88100**

Coolant nozzle DC

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	30,13	**87700**

Coolant screw plug

70 950 ...

EUR 2A/28

Spare parts for Article no.		
70 783 02500 / 70 783 02501	4,59	**294**

9

MaxiLock-S – SVHC 107.5° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

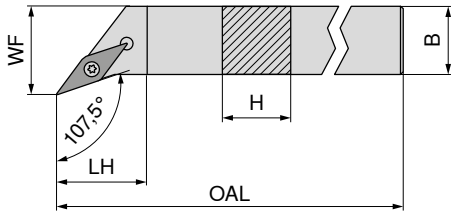



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	torque moment Nm	Insert	NEW Left-hand 70 662 ... EUR 2A/24		NEW Right-hand 70 662 ... EUR 2A/24	
SVHC R/L 1212 F11	12	12	80	11,9	16	1,2	VC.. 1103	99,92	**01200**	99,92	**01201**
SVHC R/L 1616 H11	16	16	100	11,9	20	1,2	VC.. 1103	111,30	**01600**	111,30	**01601**
SVHC R/L 2020 K11	20	20	125	14,7	25	1,2	VC.. 1103	118,90	**02000**	118,90	**02001**
SVHC R/L 2525 M11	25	25	150	20,1	32	1,2	VC.. 1103	122,70	**02500**	122,70	**02501**
SVHC R/L 2020 K16	20	20	125	13,7	25	3,2	VC.. 1604	118,90	**12000**	118,90	**12001**
SVHC R/L 2525 M16	25	25	150	20,0	32	3,2	VC.. 1604	122,70	**12500**	122,70	**12501**
SVHC R/L 3225 P16	32	25	170	20,0	32	3,2	VC.. 1604	128,90	**13200**	128,90	**13201**
SVHC R/L 2525 M22	25	25	150	21,9	32	5	VC.. 2205	122,70	**22500**	122,70	**22501**

Key D

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.	Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat V 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 662 01201 / 70 662 01200	8,11	**039**	5,38	**857**				
70 662 01601 / 70 662 01600	8,11	**039**	5,38	**857**				
70 662 02001 / 70 662 02000	8,11	**039**	5,38	**857**				
70 662 02501 / 70 662 02500	8,11	**039**	5,38	**857**				
70 662 12001 / 70 662 12000	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 662 12501 / 70 662 12500	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 662 13201 / 70 662 13200	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 662 22501 / 70 662 22500	11,79	**120**	3,84	**820**	17,21	**109**	5,98	**170**

MaxiLock-S – SVHC 107.5° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key



Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	NEW Left-hand 70 779 ... EUR 2A/24		NEW Right-hand 70 779 ... EUR 2A/24	
SVHC R/L 1212 F11 DC	12	12	80	28	16	M6	M6	1,2	VC.. 1103	213,60	**01201**	213,60	**01200**
SVHC R/L 1616 H11 DC	16	16	100	27	20	M6	G1/8"	1,2	VC.. 1103	219,80	**01601**	219,80	**01600**
SVHC R/L 2020 K11 DC	20	20	125	37	27	M6	G1/8"	1,2	VC.. 1103	225,90	**02001**	225,90	**02000**
SVHC R/L 2525 M11 DC	25	25	150	38	32	M6	G1/8"	1,2	VC.. 1103	232,10	**02501**	232,10	**02500**
SVHC R/L 2020 K16 DC	20	20	125	38	25	M6	G1/8"	3,2	VC.. 1604	225,90	**12001**	225,90	**12000**
SVHC R/L 2525 M16 DC	25	25	150	38	32	M6	G1/8"	3,2	VC.. 1604	232,10	**12501**	232,10	**12500**
SVHC R/L 3225 P16 DC	32	25	170	38	32	M6	G1/8"	3,2	VC.. 1604	238,20	**03201**	238,20	**03200**
SVHC R/L 2525 M22 DC	25	25	150	41	32	M6	G1/8"	5	VC.. 2205	232,10	**22501**	232,10	**22500**

Spare parts for Article no.	Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat V 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 779 01200 / 70 779 01201	5,38	**857**					3,84	**86700**		
70 779 01600 / 70 779 01601	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 779 02000 / 70 779 02001	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 779 02500 / 70 779 02501	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 779 12000 / 70 779 12001	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 779 12500 / 70 779 12501	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 779 03200 / 70 779 03201	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 779 22500 / 70 779 22501	3,84	**820**	17,21	**109**	2,19	**88000**	3,84	**86700**	5,98	**170**

Spare parts for Article no.	Sealing plugs DC 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		O-Ring 70 950 ... EUR 2A/28		Coolant nozzle DC 70 950 ... EUR 2A/28		Coolant screw plug 70 950 ... EUR 2A/28	
70 779 01200 / 70 779 01201			8,11	**039**						
70 779 01600 / 70 779 01601	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 779 02000 / 70 779 02001	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 779 02500 / 70 779 02501	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 779 12000 / 70 779 12001	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 779 12500 / 70 779 12501	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 779 03200 / 70 779 03201	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 779 22500 / 70 779 22501	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-S – SVAC 90° – Toolholder with screw clamping

▲ for sliding head lathes

Scope of supply:

Tool holder with Torx key





Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	WF mm	torque moment Nm	Insert	Left-hand 70 695 ... EUR X0		Right-hand 70 694 ... EUR X0	
SVAC R/L 0808 H11	8	8	100	8	1,2	VC.. 1103	106,90	**008**	106,90	**008**
SVAC R/L 1010 H11	10	10	100	10	1,2	VC.. 1103	106,90	**010**	106,90	**010**
SVAC R/L 1212 H11	12	12	100	12	1,2	VC.. 1103	123,00	**012**	123,00	**012**

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
70 694 008 / 70 695 008	T08	10,05	**110**	M2,5x6 - T08	2,99	**13800**
70 694 010 / 70 695 010	T08	10,05	**110**	M2,5x6 - T08	2,99	**13800**
70 694 012 / 70 695 012	T08	10,05	**110**	M2,5x6 - T08	2,99	**13800**

MaxiLock-S – SVVC 72.5° – Toolholder with screw clamping

Scope of supply:

Tool holder with Torx key

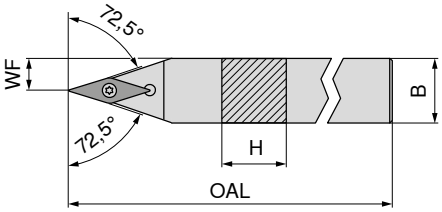



NEW

Neutral

ISO designation	H mm	B mm	OAL mm	WF mm	torque moment Nm	Insert	70 666 ... EUR 2A/24	
SVVC N 1212 F11	12	12	80	6,0	1,2	VC.. 1103	99,92	**01200**
SVVC N 1616 H11	16	16	100	8,0	1,2	VC.. 1103	111,30	**01600**
SVVC N 2020 K11	20	20	125	10,0	1,2	VC.. 1103	118,90	**02000**
SVVC N 2525 M11	25	25	150	12,5	1,2	VC.. 1103	118,90	**02500**
SVVC N 2020 K16	20	20	125	10,0	3,2	VC.. 1604	118,90	**12000**
SVVC N 2525 M16	25	25	150	12,5	3,2	VC.. 1604	118,90	**12500**
SVVC N 3225 P16	32	25	170	12,5	3,2	VC.. 1604	128,90	**13200**

Key D

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 666 01200	8,11	**039**	5,38	**857**				
70 666 01600	8,11	**039**	5,38	**857**				
70 666 02000	8,11	**039**	5,38	**857**				
70 666 02500	8,11	**039**	5,38	**857**				
70 666 12000	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 666 12500	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**
70 666 13200	11,79	**120**	4,82	**87900**	12,97	**107**	5,98	**171**

MaxiLock-S – SVVC 72.5° DC – Tool holder with screw clamping

Scope of supply:

Tool holder with blind plug and Torx key





NEW

Neutral

70 781 ...

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	
SVVC N 1212 F11 DC	12	12	80	29,0	6,0	M6	M6	1,2	VC.. 1103	209,40	**01200**
SVVC N 1616 H11 DC	16	16	100	29,5	8,0	M6	G1/8"	1,2	VC.. 1103	213,60	**01600**
SVVC N 2020 K11 DC	20	20	125	43,0	10,0	M6	G1/8"	1,2	VC.. 1103	219,80	**02000**
SVVC N 2525 M11 DC	25	25	150	43,0	12,5	M6	G1/8"	1,2	VC.. 1103	232,10	**02500**
SVVC N 2020 K16 DC	20	20	125	43,0	10,0	M6	G1/8"	3,2	VC.. 1604	219,80	**12000**
SVVC N 2525 M16 DC	25	25	150	43,0	12,5	M6	G1/8"	3,2	VC.. 1604	232,10	**12500**
SVVC N 3225 P16 DC	32	25	170	44,0	12,5	G1/8"	G1/8"	3,2	VC.. 1604	238,20	**03200**

Clamping screw

70 950 ...

Solid Carbide Seat V

70 950 ...

Grubscrew

70 950 ...

Grubscrew

70 950 ...

Threaded sleeve

70 950 ...

Spare parts for Article no.	EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 781 01200	5,38	**857**					3,84	**86700**		
70 781 01600	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 781 02000	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 781 02500	5,38	**857**			2,19	**88000**	3,84	**86700**		
70 781 12000	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 781 12500	4,82	**87900**	12,97	**107**	2,19	**88000**	3,84	**86700**	5,98	**171**
70 781 03200	4,82	**87900**	12,97	**107**	2,19	**88000**			5,98	**171**

Sealing plugs DC

70 950 ...

Key D

80 950 ...

O-Ring

70 950 ...

Coolant nozzle DC

70 950 ...

Coolant screw plug

70 950 ...

Spare parts for Article no.	EUR 2A/28		EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28	
70 781 01200			8,11	**039**						
70 781 01600	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 781 02000	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87800**	4,59	**294**
70 781 02500	1,53	**87600**	8,11	**039**	1,36	**88100**	30,13	**87700**	4,59	**294**
70 781 12000	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87800**	4,59	**294**
70 781 12500	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87800**	4,59	**294**
70 781 03200	1,53	**87600**	11,79	**120**	1,36	**88100**	30,13	**87700**	4,59	**294**

MaxiLock-S – SVXC 91° – Toolholder with screw clamping

▲ for sliding head lathes

Scope of supply:
Tool holder with Torx key

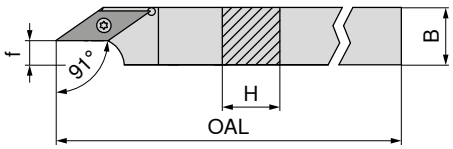

Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	f mm	torque moment Nm	Insert	Left-hand 70 691 ... EUR X0		Right-hand 70 690 ... EUR X0	
SVXC R/L 1010 H11	10	10	100	2,5	1,2	VC.. 1103	106,90	**010**	106,90	**010**
SVXC R/L 1212 H11	12	12	100	4,5	1,2	VC.. 1103	123,00	**012**	123,00	**012**
SVXC R/L 1616 K11	16	16	125	8,5	1,2	VC.. 1103	134,00	**016**	134,00	**016**
SVXC R/L 2020 K16	20	20	125	8,5	3,2	VC.. 1604	153,90	**020**	153,90	**020**

Key D

Clamping screw

Spare parts for Article no.		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
70 690 010 / 70 691 010	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**
70 690 012 / 70 691 012	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**
70 690 016 / 70 691 016	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**
70 690 020 / 70 691 020	T15	11,96	**113**	M3,5x11	4,14 **113**

MaxiLock-S – SVUC 93° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 557 ... EUR 2D/80		Right-hand 74 558 ... EUR 2D/80	
HSK T63 SVUC R/L 16	HSK-T 63	70	42	53	45	100	3.2	VC.. 1604	344,20	**516**	344,20	**516**

Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		Combination Key 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat V 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
74 558 516 / 74 557 516	T15/SW	10,66	**398**	M3,5x11	4,14 **113**		12,97 **107**	M3,5	5,98 **171**

MaxiLock-S – SVJC 93° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 556 ... EUR 2D/80		Right-hand 74 555 ... EUR 2D/80	
HSK T63 SVJC R/L 16	HSK-T 63	75	42	53	45	100	3.2	VC.. 1604	344,20	**516**	344,20	**516**


Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 555 516 / 74 556 516	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	12,97	**107**	M3,5	5,98	**171**

MaxiLock-S – SVHC 107.5° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	l_2 mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 554 ... EUR 2D/80		Right-hand 74 553 ... EUR 2D/80	
HSK T63 SVHC R/L 16	HSK-T 63	70	42	53	45	100	3.2	VC.. 1604	344,20	**516**	344,20	**516**


Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 553 516 / 74 554 516	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	12,97	**107**	M3,5	5,98	**171**

MaxiLock-S – SVMC 50° – Toolholder with screw clamping

Scope of supply:
Tool holder with Torx key

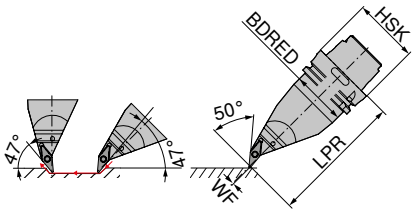

ISO designation	Adapter	LPR mm	BDRED mm	WF mm	torque moment Nm	Insert	Left-hand 74 560 ... EUR 2D/80	
HSK T63 SVMC L 16	HSK-T 63	130	53	0	3.2	VC.. 1604	461,80	**516**

Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
74 560 516	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	12,97	**107**	M3,5	5,98	**171**

MaxiLock-S – SVPC 117,5° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	torque moment Nm	Insert	Direct cooling compatible	Left-hand 84 671 ... EUR Y8		Right-hand 84 670 ... EUR Y8	
PSC40 SVPC R/L 50050-16	PSC 40	50	27	50	3	VC.. 1604	DC	252,20	**01695**	252,20	**01695**
PSC50 SVPC R/L 65060-16	PSC 50	60	35	65	3	VC.. 1604	DC	289,10	**01694**	289,10	**01694**
PSC63 SVPC R/L 80065-16	PSC 63	65	45	80	3	VC.. 1604	DC	321,60	**01693**	321,60	**01693**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 670 01695 / 84 671 01695	3,92	**27600**
84 670 01694 / 84 671 01694	3,92	**27600**
84 670 01693 / 84 671 01693	3,92	**27600**

MaxiLock-S – SVVC 72.5° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Neutral

84 678 ...

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	EUR Y8	
PSC63 SVVC N 0100-16	PSC 63	100	3	VC.. 1604	DC	321,60	**01693**
PSC63 SVVC N 0130-16	PSC 63	130	3	VC.. 1604	DC	321,60	**11693**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

84 950 ...

Spare parts for Article no.	EUR Y8	
84 678 01693	3,92	**27600**
84 678 11693	3,92	**27600**

9

MaxiLock-S – SVMC 50° – Toolholder with screw clamping

Scope of supply:
without high-performance coolant set



Neutral

84 681 ...

ISO designation	Adapter	LPR mm	torque moment Nm	Insert	Direct cooling compatible	EUR Y8	
PSC63 SVMC L 0130-16	PSC 63	130	3	VC.. 1604	DC	433,70	**11693**

The high-performance coolant set with article number **84 950 27400** can be ordered as an optional extra → **Page 40.**

Clamping screw

84 950 ...

Spare parts for Article no.	EUR Y8	
84 681 11693	3,92	**27600**

MaxiLock-S – SVUC 93° – Boring bar with screw clamping

Scope of supply:
Boring bar with Torx key



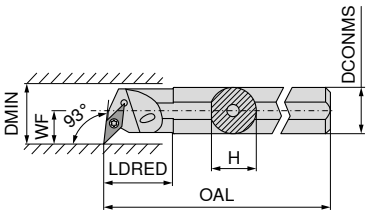

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 745 ... EUR 2A/24		Right-hand 70 744 ... EUR 2A/24	
A16M SVUC R/L 11	16	15	150	29	11	20	1,2	VC.. 1103	162,30	**216**	162,30	**216**
A20Q SVUC R/L 11	20	19	180	43	13	25	1,2	VC.. 1103	187,10	**220**	187,10	**220**
A25R SVUC R/L 11	25	24	200	38	17	32	1,2	VC.. 1103	229,20	**225**	229,20	**225**
A32S SVUC R/L 16	32	31	250	50	22	40	3,2	VC.. 1604	275,00	**232**	275,00	**232**
A40T SVUC R/L 16	40	39	300	60	27	50	3,2	VC.. 1604	319,10	**240**	319,10	**240**

Key D

Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 744 216 / 70 745 216	10,05	**110**			2,99	**13800**				
70 744 220 / 70 745 220	10,05	**110**			2,99	**13800**				
70 744 225 / 70 745 225	10,05	**110**			2,99	**13800**				
70 744 232 / 70 745 232			10,66	**398**	4,14	**113**	12,97	**107**	5,98	**171**
70 744 240 / 70 745 240			10,66	**398**	4,14	**113**	12,97	**107**	5,98	**171**

MaxiLock-S – SVUC 93° – Boring bar with screw clamping

▲ with carbide core

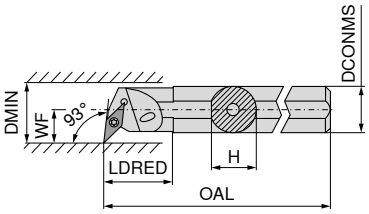

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Right-hand 70 746 ... EUR 2A	
E-A16M SVUC R 11	16	15	150	16,5	11	21	1,2	VC.. 1103	420,40	**216**
E-A20Q SVUC R 11	20	18	180	20,5	13	25	1,2	VC.. 1103	598,80	**220**
E-A25R SVUC R 11	25	23	200	25,5	17	31	1,2	VC.. 1103	1.017,00	**225**
E-A25R SVUC R 16	25	23	200	25,5	17	31	3,2	VC.. 1604	1.017,00	**325**
E-A32S SVUC R 16	32	30	250	32,5	22	39	3,2	VC.. 1604	1.096,00	**232**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 746 216	10,05	**110**	2,99	**13800**
70 746 220	10,05	**110**	2,99	**13800**
70 746 225	10,05	**110**	2,99	**13800**
70 746 325	11,96	**113**	4,06	**449**
70 746 232	11,96	**113**	4,06	**449**

MaxiLock-S – SVUC 93° – Boring bar with screw clamping

▲ Type: Solid carbide

Scope of supply:

Boring bar with Torx key



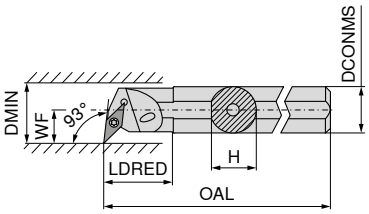

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 747 ... EUR 2A/24		Right-hand 70 746 ... EUR 2A/24	
E16R SVUC L 11	16	15,0	200	34	11	20	1,2	VC.. 1103	621,60	**016**		
E16R SVUC R 11	16	15,5	200	34	11	20	1,2	VC.. 1103			621,60	**016**
E20S SVUC L 11	20	18,5	250	38	13	25	1,2	VC.. 1103	737,20	**020**		
E20S SVUC R 11	20	19,0	250	38	13	25	1,2	VC.. 1103			737,20	**020**

Key D

Clamping screw

Spare parts for Article no.		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
70 747 016	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**
70 746 016	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**
70 747 020	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**
70 746 020	T08	10,05	**110**	M2,5x6 - T08	2,99 **13800**

9

MaxiLock-S – SVQC 107.5° – Boring bar with screw clamping

Scope of supply:

Boring bar with Torx key



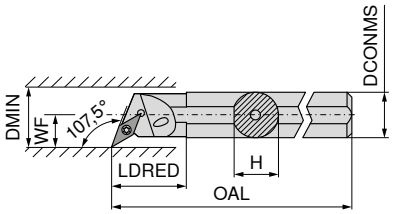

Illustrations show right-hand versions

ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 749 ... EUR 2A/24		Right-hand 70 748 ... EUR 2A/24	
A16M SVQC R/L 11	16	15,0	150	29	11	20	1,2	VC.. 1103	162,30	**216**	162,30	**216**
A20Q SVQC R/L 11	20	18,5	180	32	13	25	1,2	VC.. 1103	187,10	**220**	187,10	**220**
A25R SVQC R/L 11	25	23,0	200	36	17	32	1,2	VC.. 1103	229,20	**225**	229,20	**225**
A32S SVQC R/L 16	32	30,0	250	50	22	40	3,2	VC.. 1604	275,00	**232**	275,00	**232**
A40T SVQC R/L 16	40	38,0	300	60	27	50	3,2	VC.. 1604	319,10	**240**	319,10	**240**

Key D

Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		Key D 80 950 ... EUR Y7		Combination Key 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Solid Carbide Seat V 70 950 ... EUR 2A/28		Threaded sleeve 70 950 ... EUR 2A/28	
70 748 216 / 70 749 216		10,05	**110**			2,99	**13800**				
70 748 220 / 70 749 220		10,05	**110**			2,99	**13800**				
70 748 225 / 70 749 225		10,05	**110**			2,99	**13800**				
70 748 232 / 70 749 232				10,66	**398**	4,14	**113**	12,97	**107**	5,98	**171**
70 748 240 / 70 749 240				10,66	**398**	4,14	**113**	12,97	**107**	5,98	**171**

MaxiLock-S – SVJC 93° – Boring bar with screw clamping



ISO designation	DCONMS mm	H mm	OAL mm	LDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 727 ... EUR 2A	
A16M SVJC L 11	16	15	150	50,0	2	22	1,2	VC.. 1103	144,50	**216**
A20M SVJC L 11	20	19	150	55,5	2	25	1,2	VC.. 1103	144,50	**220**
A25M SVJC L 16	25	24	150	58,0	5	28	3,2	VC.. 1604	144,50	**225**

Key D

Clamping screw

Spare parts for Article no.	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 727 216 / 70 726 216	10,05	**110**	2,99	**13800**
70 727 220 / 70 726 220	10,05	**110**	2,99	**13800**
70 727 225 / 70 726 225	11,96	**113**	4,46	**174**

MaxiLock-S – SVUC 93° – Boring bar with screw clamping

Scope of supply:
Boring bar with Torx key





Illustrations show right-hand versions

ISO designation	Adapter	LPR mm	LH mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 568 ... EUR 2D/80		Right-hand 74 567 ... EUR 2D/80	
HSK T63 40L SVUC R/L 16	HSK-T 63	140	114	40	27	50	3.2	VC.. 1604	458,90	**516**	458,90	**516**

Combination Key

Clamping screw

Solid Carbide Seat V

Threaded sleeve

Spare parts for Article no.		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
74 567 516 / 74 568 516	T15/SW	10,66	**398**	M3,5x11	4,14	**113**	12,97	**107**	M3,5	5,98	**171**

WCGT / WCGW

Designation	L	S	D1	IC
	mm	mm	mm	mm
WCGW 0201..	2,70	1,58	2,3	3,97
WCGT 0201..	2,71	1,59	2,1	3,97



CBN/PKD WCGW F



WCGT

WCGT

	-SF TCM10	-SF CTPP430	-SF H216T
		DRAGONSKIN	
	F	**F**	**F**
	CERMET		
	WCGT	WCGT	WCGT
	70 287 ...	**70 287 ...**	**70 287 ...**
ISO RE mm	EUR 1A/78	EUR 1A/08	EUR 1A/08
020102EN 0,2	21,33 **900**	22,95 **450**	17,54 **600**
020104EN 0,4	21,33 **902**	22,95 **452**	17,54 **602**
P	●	●	
M	○	●	
K	○	○	○
N		○	●
S		○	
H			
O			○

WCGW

▲ TCE(NOI) = Design and number of equipped cutting edge corners

	CTDPD20
	F
	DIAMOND
	WCGW
	71 154 ...
ISO RE mm / TCE (NOI) / LE mm	EUR Y0
020102FN 0,2 **F** 2,7	161,80 **100**
020104FN 0,4 **F** 2,7	161,80 **102**
P	
M	
K	
N	●
S	
H	
O	●

9

MaxiLock-S – SWUC 93° – Boring bar with screw clamping

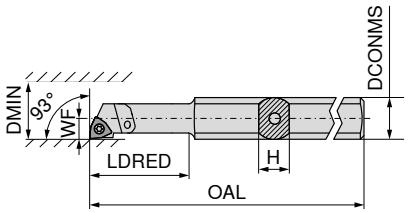

Illustrations show right-hand versions

ISO designation	H mm	OAL mm	LDRED mm	WF mm	DCONMS mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 731 ... EUR 2A		Right-hand 70 730 ... EUR 2A	
A0508H SWUC R/L 02	7	100	24	2,9	8	5,8	0,4	WC.. 0201..	178,40	**005**	178,40	**005**
A0608H SWUC R/L 02	7	100	24	3,9	8	7,8	0,4	WC.. 0201..	178,40	**006**	178,40	**006**

Key D

80 950 ...

Clamping screw

70 950 ...

Spare parts for Article no.		EUR Y7			EUR 2A/28	
70 731 005 / 70 730 005	T06	10,87	**108**	M1,8x3,4	4,75	**334**
70 731 006 / 70 730 006	T06	10,87	**108**	M1,8x3,4	4,75	**334**

MaxiLock-S – SWUC 93° – Boring bar with screw clamping

▲ with carbide core

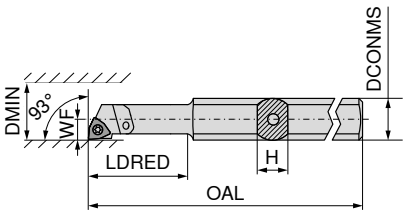

Illustrations show right-hand versions

ISO designation	H mm	OAL mm	LDRED mm	WF mm	DCONMS mm	DMIN mm	torque moment Nm	Insert	Left-hand 70 743 ... EUR 2A		Right-hand 70 742 ... EUR 2A	
E-A0508H SWUC R/L 02	7	100	24	2,9	8	5,8	0,4	WC.. 0201..	198,70	**005**	198,70	**005**
E-A0608H SWUC R/L 02	7	100	24	3,9	8	7,8	0,4	WC.. 0201..	198,70	**006**	198,70	**006**
SET							0,4	WC.. 0201..	394,80	**999**	394,80	**999**

Set includes boring bars **70 743 005** and **70 743 006** or **70 742 005** and **70 742 006**

Key D

80 950 ...

Clamping screw

70 950 ...

Spare parts for Article no.		EUR Y7			EUR 2A/28	
70 743 005 / 70 742 005	T06	10,87	**108**	M1,8x3,4	4,75	**334**
70 743 006 / 70 742 006	T06	10,87	**108**	M1,8x3,4	4,75	**334**

MaxiChange – Base holders for the exchangeable head system

Scope of supply:
Includes clamping screws

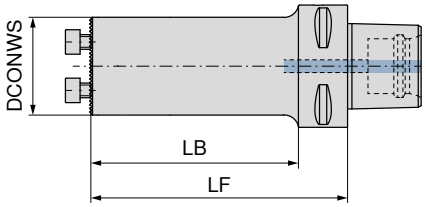

NEW

Adapter	LF mm	LB mm	DCONWS mm		EUR Y8	84 192 ...
PSC 40	40	20	16		321,30	**01695**
PSC 40	50	30	20		331,80	**02095**
PSC 40	55	35	25		323,50	**02595**
PSC 40	75	55	32		323,50	**03295**
PSC 40	80		40		323,50	**04095**
PSC 50	40	20	16		361,80	**01694**
PSC 50	50	30	20		361,80	**02094**
PSC 50	55	35	25		363,90	**02594**
PSC 50	75	55	32		363,90	**03294**
PSC 50	100	80	40		363,90	**04094**
PSC 63	40	18	16		394,20	**01693**
PSC 63	50	28	20		394,20	**02093**
PSC 63	65	43	25		397,00	**02593**
PSC 63	90	68	32		397,00	**03293**
PSC 63	125	103	32		397,00	**13293**
PSC 63	100	78	40		397,00	**04093**
PSC 63	140	118	40		397,00	**14093**

Clamping Screw

Spare parts for Article no.		EUR Y8	84 950 ...
84 192 02595	M4X12 (SW3)	2,14	**30000**
84 192 03295	M5X14 (SW4)	2,14	**29900**
84 192 04095	M6X16 (SW5)	2,14	**29800**
84 192 02594	M4X12 (SW3)	2,14	**30000**
84 192 03294	M5X14 (SW4)	2,14	**29900**
84 192 04094	M6X16 (SW5)	2,14	**29800**
84 192 02593	M4X12 (SW3)	2,14	**30000**
84 192 03293	M5X14 (SW4)	2,14	**29900**
84 192 04093	M6X16 (SW5)	2,14	**29800**
84 192 13293	M5X14 (SW4)	2,14	**29900**
84 192 14093	M6X16 (SW5)	2,14	**29800**

MaxiChange – Base holders for the exchangeable head system – vibration-damped

▲ Heavy metal core reduces vibrations

Scope of supply:

Includes clamping screws

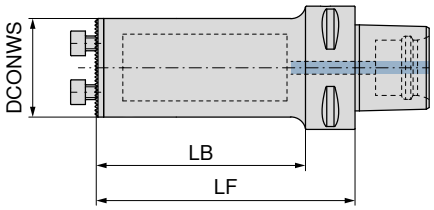



Adapter	LF mm	LB mm	DCONWS mm	84 195 ... EUR Y8	
PSC 63	115	93	25	1.117,00	**02593**
PSC 63	150	128	32	1.235,00	**03293**
PSC 63	185	163	40	1.353,00	**04093**

Clamping Screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 195 02593	2,14	**30000**
84 195 03293	2,14	**29900**
84 195 04093	2,14	**29800**

MaxiChange – Base holders for the exchangeable head system – actively vibration-damped

▲ Reduction of vibrations through actively mounted dampers
▲ Improvement in surface finish and chip evacuation

Scope of supply:
Includes clamping screws

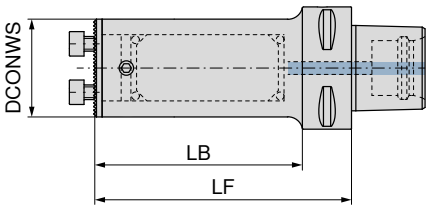

NEW

Adapter	LF mm	LB mm	DCONWS mm	84 198 ... EUR Y8	
PSC 40	88	68	16	1.532,00	**31695**
PSC 40	107	87	20	1.121,00	**32095**
PSC 40	132	112	25	1.093,00	**42595**
PSC 40	154	134	32	1.301,00	**43295**
PSC 40	173		40	1.395,00	**44095**
PSC 50	85	65	16	1.228,00	**31694**
PSC 50	109	89	20	1.205,00	**32094**
PSC 50	133	113	25	1.215,00	**32594**
PSC 50	180	160	25	1.821,00	**42594**
PSC 50	154	134	32	1.314,00	**33294**
PSC 50	224	204	32	1.380,00	**43294**
PSC 50	194	174	40	1.580,00	**34094**
PSC 50	288	268	40	2.631,00	**44094**
PSC 63	90	68	16	1.571,00	**31693**
PSC 63	110	88	20	1.547,00	**32093**
PSC 63	132	110	25	1.442,00	**32593**
PSC 63	180	158	25	2.022,00	**42593**
PSC 63	230	208	25	2.865,00	**52593**
PSC 63	159	137	32	1.636,00	**33293**
PSC 63	224	202	32	2.291,00	**43293**
PSC 63	288	266	32	3.250,00	**53293**
PSC 63	198	176	40	1.790,00	**34093**
PSC 63	288	266	40	2.631,00	**44093**
PSC 63	368	346	40	3.440,00	**54093**

Clamping Screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 198 42595	2,14	**30000**
84 198 43295	2,14	**29900**
84 198 44095	2,14	**29800**
84 198 32594	2,14	**30000**
84 198 33294	2,14	**29900**
84 198 42594	2,14	**30000**
84 198 34094	2,14	**29800**
84 198 43294	2,14	**29900**
84 198 44094	2,14	**29800**
84 198 32593	2,14	**30000**
84 198 33293	2,14	**29900**
84 198 42593	2,14	**30000**
84 198 34093	2,14	**29800**
84 198 43293	2,14	**29900**
84 198 52593	2,14	**30000**
84 198 53293	2,14	**29900**
84 198 44093	2,14	**29800**
84 198 54093	2,14	**29800**

MaxiChange – Base holders for the exchangeable head system

Scope of supply:
Includes clamping screws

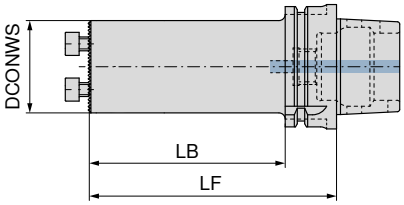

NEW

Adapter	LF mm	LB mm	DCONWS mm		84 193 ... EUR Y8	
HSK-T 40	55	35	25		323,50	**02539**
HSK-T 40	75	55	25		323,50	**12539**
HSK-T 40	80	60	32		323,50	**03239**
HSK-T 40	80		40		323,50	**04039**
HSK-T 63	56	30	16		474,50	**01637**
HSK-T 63	80	54	20		533,90	**02037**
HSK-T 63	80	44	25		397,00	**02537**
HSK-T 63	90	64	32		397,00	**03237**
HSK-T 63	100	74	40		397,00	**04037**
HSK-T 63	125	99	32		397,00	**13237**
HSK-T 63	140	114	40		397,00	**14037**
HSK-T 100	140	111	40		523,90	**04035**

Clamping Screw

Spare parts for Article no.		84 950 ... EUR Y8	
84 193 02539	M4X12 (SW3)	2,14	**30000**
84 193 12539	M4X12 (SW3)	2,14	**30000**
84 193 03239	M5X14 (SW4)	2,14	**29900**
84 193 04039	M6X16 (SW5)	2,14	**29800**
84 193 02537	M4X12 (SW3)	2,14	**30000**
84 193 03237	M5X14 (SW4)	2,14	**29900**
84 193 04037	M6X16 (SW5)	2,14	**29800**
84 193 13237	M5X14 (SW4)	2,14	**29900**
84 193 14037	M6X16 (SW5)	2,14	**29800**
84 193 04035	M6X16 (SW5)	2,14	**29800**

MaxiChange – Base holders for the exchangeable head system – vibration-damped

▲ Heavy metal core reduces vibrations

Scope of supply:
Includes clamping screws

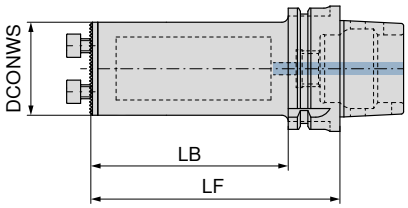



NEW

Adapter	LF mm	LB mm	DCONWS mm	84 195 ... EUR Y8	
HSK-T 63	115	89	25	1.117,00	**02537**
HSK-T 63	150	124	32	1.235,00	**03237**
HSK-T 63	185	159	40	1.353,00	**04037**

Clamping Screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 195 02537	2,14	**30000**
84 195 03237	2,14	**30000**
84 195 04037	2,14	**30000**

9

MaxiChange – Base holders for the exchangeable head system – actively vibration-damped

▲ Reduction of vibrations through actively mounted dampers
▲ Improvement in surface finish and chip evacuation

Scope of supply:
Includes clamping screws

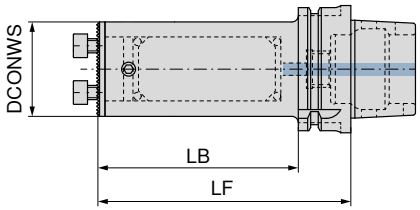

NEW

Adapter	LF mm	LB mm	DCONWS mm	EUR Y8	84 198 ...
HSK-T 63	90	64	16	1.571,00	**31637**
HSK-T 63	106	80	20	1.547,00	**32037**
HSK-T 63	126	100	25	1.442,00	**32537**
HSK-T 63	151	125	25	2.020,00	**42537**
HSK-T 63	154	128	32	1.634,00	**33237**
HSK-T 63	186	160	32	2.289,00	**43237**
HSK-T 63	186	160	40	1.788,00	**34037**
HSK-T 63	226	200	40	2.631,00	**44037**

Clamping Screw

Spare parts for Article no.	EUR Y8	84 950 ...
84 198 42537	2,14	**30000**
84 198 32537	2,14	**30000**
84 198 43237	2,14	**29900**
84 198 33237	2,14	**29900**
84 198 44037	2,14	**29800**
84 198 34037	2,14	**29800**

MaxiChange – Base holders for the exchangeable head system – cylindrical

▲ Connection thread for thro' coolant
▲ 3 clamping flats

Scope of supply:
Includes clamping screws

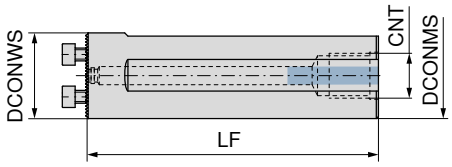



NEW

DCONWS mm	LF mm	DCONMS mm	CNT	84 194 ... EUR Y8	
25	100	25	M8 x 1	224,90	**12599**
32	120	32	M8 x 1	224,90	**13299**
40	120	40	M8 x 1	224,90	**14099**
25	200	25	1/4	313,60	**02599**
32	218	32	3/8	333,70	**03299**
40	283	40	1/2	407,40	**04099**

Clamping Screw

Spare parts for Article no.		84 950 ... EUR Y8	
84 194 02599	M4X12 (SW3)	2,14	**30000**
84 194 03299	M5X14 (SW4)	2,14	**29900**
84 194 04099	M6X16 (SW5)	2,14	**29800**

9

MaxiChange –
Base holders for the exchangeable head system – actively vibration-damped

▲ Reduction of vibrations through actively mounted dampers
▲ Improvement in surface finish and chip evacuation

Scope of supply:
Includes clamping screws

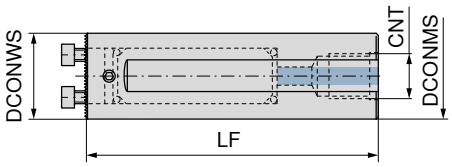

NEW

DCONWS mm	LF mm	DCONMS mm	CNT	84 198 ... EUR Y8	
16	170	16	1/4	1.017,00	**31699**
20	200	20	1/4	1.190,00	**32099**
25	255	25	1/4	1.245,00	**32599**
32	320	32	1/2	1.272,00	**33299**
40	408	40	1/2	1.797,00	**34099**

Clamping Screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 198 31699	4,35	**44800**
84 198 32099	9,26	**44900**
84 198 32599	2,14	**30000**
84 198 33299	2,14	**29900**
84 198 34099	2,14	**29800**

MaxiChange – 0° base holders for the exchangeable head system

Scope of supply:
Includes clamping screws

Direct Cooling

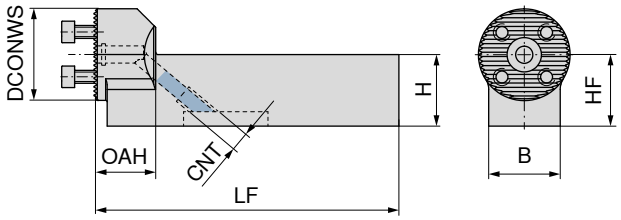



NEW

DCONWS mm	H mm	B mm	HF mm	OAH mm	LF mm	CNT	84 185 ... EUR Y8	
25	20	20	20	21	106	M8x1	224,90	**02500**
32	20	20	20	21	106	M8x1	224,90	**03200**
32	25	25	25	21	106	M8x1	224,90	**13200**
40	25	25	25	21	106	M8x1	224,90	**14000**

Clamping Screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 185 02500	2,14	**30000**
84 185 03200	2,14	**29900**
84 185 13200	2,14	**29900**
84 185 14000	2,14	**29800**

→ **Chapter 16 Adapters and accessories**
Here you will find the suitable base adaptors.

MaxiChange – 90° base holders for the exchangeable head system

Scope of supply:
Includes clamping screws

Direct Cooling

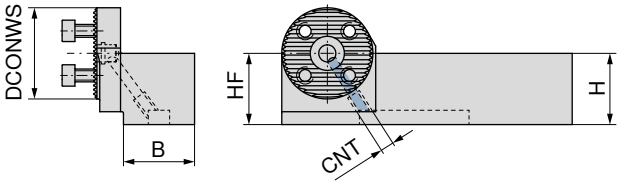



NEW

DCONWS mm	H mm	B mm	HF mm	CNT	84 184 ... EUR Y8	
25	20	20	20	M8x1	224,90	**02500**
32	20	20	20	M8x1	224,90	**03200**
32	25	25	25	M8x1	224,90	**13200**
40	25	25	25	M8x1	224,90	**14000**

Clamping Screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 184 02500	2,14	**30000**
84 184 03200	2,14	**30000**
84 184 13200	2,14	**30000**
84 184 14000	2,14	**29800**

→ **Chapter 16 Adapters and accessories**
Here you will find the suitable base adaptors.

MaxiChange-N – Exchangeable cutting head PCLN 95°



Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	Left-hand 84 159 ... EUR Y8		Right-hand 84 160 ... EUR Y8	
25	35	32	17	5	CN.. 1204	245,90	**02500**	245,90	**02500**
32	35	40	22	5	CN.. 1204	253,00	**03200**	253,00	**03200**
40	40	50	27	5	CN.. 1204	256,50	**04000**	256,50	**04000**

Shim

Elbow lever screw

Lever

Carbide type C

Spare parts for Article no.	Shim 84 950 ... EUR Y8		Elbow lever screw 84 950 ... EUR Y8		Lever 84 950 ... EUR Y8		Carbide type C 84 950 ... EUR Y8	
84 160 02500 / 84 159 02500	1,42	**29200**	M8X1/L17 SW3	5,58 **28700**	16,53	**29000**	16,43	**27800**
84 160 03200 / 84 159 03200	1,42	**29200**	M8X1/L17 SW3	5,58 **28700**	16,53	**29000**	16,43	**27800**
84 160 04000 / 84 159 04000	1,42	**29200**	M8X1/L17 SW3	5,58 **28700**	16,53	**29000**	16,43	**27800**

MaxiChange-N – Exchangeable cutting head PDUN 93°





Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	Left-hand 84 161 ... EUR Y8		Right-hand 84 162 ... EUR Y8	
25	35	32	17	5	DN.. 1104	245,90	**02500**	245,90	**02500**
32	35	40	22	5	DN.. 1104	253,00	**03200**	253,00	**03200**
32	35	40	22	5	DN.. 1504 / 1506	253,00	**13200**	253,00	**13200**
40	40	50	27	5	DN.. 1104	256,50	**04000**	256,50	**04000**
40	40	50	27	5	DN.. 1504 / 1506	256,50	**14000**	256,50	**14000**

When using DN.. 1504 indexable inserts, use insert seat article no. **84 950 28200**.

Shim

Elbow lever screw

Lever

Solid Carbide Seat D

Spare parts for Article no.	Shim 84 950 ... EUR Y8		Elbow lever screw 84 950 ... EUR Y8		Lever 84 950 ... EUR Y8		Solid Carbide Seat D 84 950 ... EUR Y8	
84 162 02500 / 84 161 02500	1,42	**29300**	M6/ L14 SW2,5	5,58 **28800**	18,89	**29100**	30,22	**28100**
84 162 03200 / 84 161 03200	1,42	**29300**	M6/ L14 SW2,5	5,58 **28800**	18,89	**29100**	30,22	**28100**
84 162 13200 / 84 161 13200	1,42	**29200**	M8X1/L17 SW3	5,58 **28700**	19,24	**28900**	30,22	**27900**
84 162 04000 / 84 161 04000	1,42	**29300**	M6/ L14 SW2,5	5,58 **28800**	18,89	**29100**	30,22	**28100**
84 162 14000 / 84 161 14000	1,42	**29200**	M8X1/L17 SW3	5,58 **28700**	19,24	**28900**	30,22	**27900**

MaxiChange-N – Exchangeable cutting head PDQN 107.5°



Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	Left-hand 84 163 ... EUR Y8		Right-hand 84 164 ... EUR Y8	
25	35	32	17	5	DN.. 1104	245,90	**02500**	245,90	**02500**
32	35	40	22	5	DN.. 1104	253,00	**03200**	253,00	**03200**
40	40	50	27	5	DN.. 1104	256,50	**04000**	256,50	**04000**

Shim

Elbow lever screw

Lever

Solid Carbide Seat D

Spare parts for Article no.	Shim 84 950 ... EUR Y8			Elbow lever screw 84 950 ... EUR Y8		Lever 84 950 ... EUR Y8		Solid Carbide Seat D 84 950 ... EUR Y8	
84 163 02500 / 84 164 02500	1,42	**29300**	M6/ L14 SW2,5	5,58	**28800**	18,89	**29100**	30,22	**28100**
84 163 03200 / 84 164 03200	1,42	**29300**	M6/ L14 SW2,5	5,58	**28800**	18,89	**29100**	30,22	**28100**
84 163 04000 / 84 164 04000	1,42	**29300**	M6/ L14 SW2,5	5,58	**28800**	18,89	**29100**	30,22	**28100**

MaxiChange-N – Exchangeable cutting head PWLN 95°



Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	Left-hand 84 165 ... EUR Y8		Right-hand 84 166 ... EUR Y8	
32	35	40	22	5	WN.. 0804	253,00	**03200**	253,00	**03200**
40	40	50	27	5	WN.. 0804	256,50	**04000**	256,50	**04000**

Shim

Elbow lever screw

Lever

Solid Carbide Seat W

Spare parts for Article no.	Shim 84 950 ... EUR Y8			Elbow lever screw 84 950 ... EUR Y8		Lever 84 950 ... EUR Y8		Solid Carbide Seat W 84 950 ... EUR Y8	
84 166 03200 / 84 165 03200	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	19,24	**28900**	30,22	**27700**
84 166 04000 / 84 165 04000	1,42	**29200**	M8X1/L17 SW3	5,58	**28700**	19,24	**28900**	30,22	**27700**

MaxiChange-S – SCLC 95° – Exchangeable cutting head with screw clamping





Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	NEW Left-hand 84 147 ... EUR Y8		NEW Right-hand 84 148 ... EUR Y8	
16	20	20	11	0.9	CC.. 0602	199,70	**01600**	199,70	**01600**
20	20	25	13	3	CC.. 09T3	216,40	**02000**	199,70	**02000**
25	35	32	17	5	CC.. 1204	200,90	**02500**	200,90	**02500**
32	35	40	22	5	CC.. 1204	204,60	**03200**	204,60	**03200**
40	40	50	27	5	CC.. 1204	207,90	**04000**	207,90	**04000**

Clamping screw

84 950 ...

Spare parts for Article no.	EUR Y8	
84 148 02500 / 84 147 02500	5,93	**27500**
84 148 03200 / 84 147 03200	5,93	**27500**
84 148 04000 / 84 147 04000	5,93	**27500**

9

MaxiChange-S – SDUC 93° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	NEW Left-hand 84 143 ... EUR Y8		NEW Right-hand 84 144 ... EUR Y8	
16	20	20	11	0,9	DC.. 0702	199,70	**01600**	199,70	**01600**
20	20	25	13	3	DC.. 11T3	199,70	**02000**	199,70	**02000**
25	35	32	17	3	DC.. 11T3	200,90	**02500**	200,90	**02500**
32	35	40	22	3	DC.. 11T3	204,60	**03200**	204,60	**03200**
40	40	50	27	3	DC.. 11T3	207,90	**04000**	207,90	**04000**

Clamping screw

84 950 ...

Spare parts for Article no.	EUR Y8	
84 144 01600 / 84 143 01600	4,13	**44700**
84 144 02000 / 84 143 02000	3,92	**27600**
84 144 02500 / 84 143 02500	3,92	**27600**
84 144 03200 / 84 143 03200	3,92	**27600**
84 144 04000 / 84 143 04000	3,92	**27600**

MaxiChange-S – SDQC 107.5° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	NEW Left-hand 84 145 ... EUR Y8		NEW Right-hand 84 146 ... EUR Y8	
20	20	25	13	3	DC.. 11T3	199,70	**02000**	199,70	**02000**
25	35	32	17	3	DC.. 11T3	200,90	**02500**	200,90	**02500**
32	35	40	22	3	DC.. 11T3	204,60	**03200**	204,60	**03200**
40	40	50	27	3	DC.. 11T3	207,90	**04000**	207,90	**04000**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 146 02500 / 84 145 02500	3,92	**27600**
84 146 03200 / 84 145 03200	3,92	**27600**
84 146 04000 / 84 145 04000	3,92	**27600**

MaxiChange-S – SVPC 117.5° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	NEW Left-hand 84 176 ... EUR Y8		NEW Right-hand 84 176 ... EUR Y8	
25	35	32	17	3	VC.. 1103	203,30	**12500**	199,70	**02500**
32	35	40	22	3	VC.. 1604	206,70	**13200**	199,70	**03200**
40	40	50	27	3	VC.. 1604	206,70	**14000**	203,30	**04000**

Clamping screw

for Article no.	84 950 ... EUR Y8	
84 176 02500 / 84 176 12500	3,92	**27600**
84 176 03200 / 84 176 13200	3,92	**27600**
84 176 04000 / 84 176 14000	3,92	**27600**

MaxiChange-S – SVUC 93° – Exchangeable cutting head with screw clamping





Illustrations show right-hand versions

DCONMS	LF	DMIN	WF	torque moment	Insert	NEW Left-hand 84 177 ... EUR Y8		NEW Right-hand 84 177 ... EUR Y8	
mm	mm	mm	mm	Nm					
20	20	25	13	3	VC.. 1103	203,30	**12000**	199,70	**02000**
25	35	32	17	3	VC.. 1103	203,30	**12500**	199,70	**02500**
32	35	40	22	3	VC.. 1604	206,70	**13200**	199,70	**03200**
40	40	50	27	3	VC.. 1604	206,70	**14000**	199,70	**04000**

Clamping screw

Spare parts for Article no.	84 950 ... EUR Y8	
84 177 02000 / 84 177 12000	3,92	**27600**
84 177 02500 / 84 177 12500	3,92	**27600**
84 177 03200 / 84 177 13200	3,92	**27600**
84 177 04000 / 84 177 14000	3,92	**27600**

9

MaxiChange-S – SVQC 107.5° – Exchangeable cutting head with screw clamping





Illustrations show right-hand versions

DCONMS	LF	DMIN	WF	torque moment	Insert	NEW Left-hand 84 178 ... EUR Y8		NEW Right-hand 84 178 ... EUR Y8	
mm	mm	mm	mm	Nm					
20	20	25	13	3	VC.. 1103	203,30	**12000**	199,70	**02000**
25	35	32	17	3	VC.. 1103	203,30	**12500**	199,70	**02500**
32	35	40	22	3	VC.. 1604	206,70	**13200**	199,70	**03200**
40	40	50	27	3	VC.. 1604	206,70	**14000**	199,70	**04000**

Clamping screw

for Article no.	84 950 ... EUR Y8	
84 178 02000 / 84 178 12000	3,92	**27600**
84 178 02500 / 84 178 12500	3,92	**27600**
84 178 03200 / 84 178 13200	3,92	**27600**
84 178 04000 / 84 178 14000	3,92	**27600**

MaxiChange – Exchangeable cutting head for internal thread





Illustrations show right-hand versions

DCONMS mm	LF mm	DMIN mm	WF mm	torque moment Nm	Insert	Left-hand 84 167 ... EUR Y8		Right-hand 84 168 ... EUR Y8	
25	35	32	17	2	16 ..	266,80	**02500**	266,80	**02500**
32	35	40	22	2	16 ..	278,20	**03200**	278,20	**03200**
40	40	50	27	2	16 ..	292,90	**04000**	292,90	**04000**

Suitable internal thread inserts can be found in → **Chapter 8 Thread Turning Tools, pages 6-30**

Spare parts for Article no.	Shim 84 950 ... EUR Y8			Screw-U 84 950 ... EUR Y8		Clamping screw 84 950 ... EUR Y8	
84 168 02500	35,62	**29500**	UNC5x7,3	7,06	**29700**	7,06	**29400**
84 167 02500	35,62	**29600**	UNC5x7,3	7,06	**29700**	7,06	**29400**
84 168 03200	35,62	**29500**	UNC5x7,3	7,06	**29700**	7,06	**29400**
84 167 03200	35,62	**29600**	UNC5x7,3	7,06	**29700**	7,06	**29400**
84 168 04000	35,62	**29500**	UNC5x7,3	7,06	**29700**	7,06	**29400**
84 167 04000	35,62	**29600**	UNC5x7,3	7,06	**29700**	7,06	**29400**

Flexible coolant hoses

▲ incl. prefitted quick-coupler and coupler connector
▲ extremely flexible
▲ pressure-resistant up to 300 bar

Designation	BD mm	CND mm	OAL mm	72 990 ... EUR X0	
MU.KSS-DN3-150	6,0	3	150	90,58	11005
MU.KSS-DN3-250	6,0	3	250	95,70	11006
MU.KSS-DN5-200	9,5	5	200	103,30	11001
MU.KSS-DN5-300	9,5	5	300	108,40	11002
MU.KSS-DN5-400	9,5	5	400	111,00	11003
MU.KSS-DN5-500	9,5	5	500	113,60	11004

Threaded adapter



THID	THOD	THLGTH mm	DRVS mm	OAL mm	72 988 ... EUR X0	
G1/8"	G1/4"	11,5	17	15,0	15,19	01005
G1/8"	M8x1	11,5	14	15,0	15,19	01006
G1/8"	M12x1	11,5	14	15,0	15,19	01007
G1/8"	M14x1	11,5	17	15,0	15,19	01008
M8x1	G1/4"	11,5	17	15,0	15,19	01003
M8x1	M12x1	11,5	14	15,0	15,19	01001
M8x1	M14x1	11,5	17	15,0	15,19	01002
M8x1	G1/8"	11,5	14	23,5	15,19	01004

Quick-coupler

▲ pressure-resistant up to at least 400 bar
▲ rapid change of coolant distribution without screws thanks to click system



THOD	BD mm	DLN mm	LPR mm	CND mm	DRVS mm	72 993 ... EUR X0	
G1/8"	16	15,5	21,5	4	14	33,81	15001

Sealing plugs

▲ for closing off the quick-coupler to protect against contamination



Designation	LPR mm	DLN mm	72 994 ... EUR X0	
MU.KSVS	5,5	15,5	4,45	17001

Coupler connector

▲ pressure-resistant up to at least 400 bar



Designation	LPR mm	CND mm	DRVS mm	OAL mm	72 992 ... EUR X0	
MU.KSKS-M8x1	18,5	4	12	19	14,66	13001

G1/8" screw plug

▲ Max. 200 bar/2900 psi
▲ No sealing ring required

Designation	THSZMS	72 950 ... EUR X0	
VS.G1/8	G1/8"	21,72	010

Angled coolant connection for distributor

Designation	THOD	THID	72 987 ... EUR X0	
MU.KS-KA-KSV	G1/8"	G1/8"	42,78	18003

9

Hose (connecting piece/thread)

▲ Max. 200 bar/2900 psi
▲ No sealing ring required



Designation	THSZMS	CXD mm	OAL mm	72 305 ... EUR X0	
HDKS.150.M5-4	M5	4	150	63,83	**010**
HDKS.200.M5-4	M5	4	200	64,48	**021**
HDKS.300.M5-4	M5	4	300	64,00	**033**
HDKS.500.M5-4	M5	4	500	66,82	**045**

Hose (connecting piece/connecting piece)

▲ Max. 200 bar/2900 psi



Designation	CND mm	CXD mm	OAL mm	72 305 ... EUR X0	
HDKS.150.4-4	4	4	150	58,65	**003**
HDKS.200.4-4	4	4	200	59,46	**014**
HDKS.300.4-4	4	4	300	59,80	**025**
HDKS.500.4-4	4	4	500	61,66	**037**

Reducer fitting

▲ Max. 200 bar/2900 psi
▲ Includes sealing ring



Designation	THSZWS	THSZMS	OAL mm	72 301 ... EUR X0	
RV.100.M5-M6	M6	M5	15	40,27	**001**
RV.100.M5-M8x1	M8x1	M5	23	40,27	**003**
RV.100.M5-M10x1	M10x1	M5	27	40,27	**005**
RV.100.M5-G1/8	G1/8"	M5	27	40,27	**004**

Reducer fitting

▲ Max. 200 bar/2900 psi
▲ No sealing ring required



Designation	THSZWS	THSZMS	OAL mm	72 301 ... EUR X0	
RV.100.M6-M5	M5	M6	18	40,27	**002**
RV.100.M8x1-M5	M5	M8x1	15	40,27	**008**
RV.100.M10x1-M5	M5	M10x1	15	40,27	**007**
RV.100.G1/8-M5	M5	G1/8"	15	40,27	**006**

Swivel fitting

▲ Max. 200 bar/2900 psi



Designation	DCONWS mm	OAH mm	THSZMS	OAL mm	72 307 ... EUR X0	
KA.SV.M5-4	4	21	M5	28	135,10	**017**
KA.SV.G1/8-4	4	30	G1/8"	37	129,40	**012**

Quick connection (connector)

▲ Max. 200 bar/2900 psi
▲ No sealing ring required



Designation	THSZMS	OAL mm	72 320 ... EUR X0	
SAG.M5	M5	20	60,44	**001**

Straight fitting

▲ Max. 200 bar/2900 psi





Designation	DCONWS mm	THSZMS	OAL mm	72 307 ... EUR X0	
KA. M5-4	4	M5	27	41,11	**009**
KA. G1/8-4	4	G1/8"	32	35,62	**003**

Quick connection (coupling)

▲ Max. 200 bar/2900 psi



Designation	THSZMS	OAL mm	72 319 ... EUR X0	
KIG.M5	M5	26	175,70	**001**

9

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values

Index			DRAGONSKIN														
	TCM407	TCM10	CTEP110	CTCP115-P	CTCP125-P	CTCP135-P	CTCK110	CTCK120	CTPM125	CTCM120	CTCM130	CTPX710 -F05 -F34 -M34 -M42	CTPX710 -25P -25Q	CTPX715 -27 -29	H210T	H10T H216T
	v_c in m/min															
P.1.1	**380**	**310**	**460**	**370**	**295**	**210**	395	330	200	230	185	**325**	**340**	**275**		
P.1.2	**330**	**265**	**400**	**315**	**250**	**175**	345	280	170	200	150	**290**	**300**	**235**		
P.1.3	**280**	**230**	**350**	**270**	**210**	**145**	300	240	140	175	125	**250**	**260**	**200**		
P.1.4	**265**	**210**	**330**	**250**	**200**	**135**	280	220	130	165	115	**240**	**250**	**190**		
P.1.5	**240**	**190**	**300**	**230**	**180**	**120**	260	200	120	150	100	**220**	**235**	**170**		
P.2.1	**335**	**270**	**410**	**325**	**260**	**180**	350	290	175	200	160	**290**	**300**	**240**		
P.2.2	**260**	**210**	**325**	**250**	**195**	**130**	280	220	130	160	110	**235**	**250**	**185**		
P.2.3	**240**	**190**	**300**	**230**	**180**	**120**	260	200	120	150	100	**220**	**235**	**170**		
P.2.4	**180**	**145**	**230**	**170**	**130**	**85**	200	150	80	115	60	**175**	**190**	**125**		
P.3.1	**280**	**220**	**345**	**200**	**170**	**150**	270	220	140	160	125	**140**	**150**	**140**		
P.3.2	**225**	**170**	**280**	**140**	**105**	**95**	225	175	100	115	80	**85**	**95**	**80**		
P.3.3	**170**	**115**	**210**	**85**	**40**	**35**	180	130	50	75	40	**30**	**35**	**25**		
P.4.1	**280**	**220**	**345**	**200**	**170**	**155**			140	160	125	**140**	**155**	**140**		
P.4.2	**250**	**195**	**310**	**170**	**135**	**125**			120	140	100	**115**	**130**	**110**		
M.1.1	280	220	345			155			**140**	**160**	**125**	**140**	**150**	**140**		
M.2.1						95			**100**	**115**	**80**	**85**	**90**	**80**		
M.3.1						135			**130**	**150**	**110**	**125**	**130**	**120**		
K.1.1			410	255	170		**400**	**275**						200	170	140
K.1.2			310	235	160		**310**	**265**						160	130	115
K.2.1	355	260	440	270	180		**320**	**290**						190	180	150
K.2.2	315	215	350	205	160		**275**	**230**						150	130	110
K.3.1	325	300	415	250	200		**310**	**275**						210	190	170
K.3.2	250	205	250	210	160		**265**	**230**						180	160	140
N.1.1												1840	**1840**	**1750**	**1650**	**1400**
N.1.2												1600	**1600**	**1500**	**1350**	**1100**
N.2.1												1250	**1250**	**1200**	**1200**	**950**
N.2.2												1250	**1250**	**1200**	**1100**	**950**
N.2.3												750	**750**	**700**	**600**	**500**
N.3.1												650	**650**	**625**	**525**	**425**
N.3.2												630	**630**	**600**	**500**	**400**
N.3.3												500	**500**	**475**	**375**	**275**
N.4.1												340	**340**	**325**	**275**	**225**
S.1.1											35	**100**	**110**	**40**	45	
S.1.2											25	**80**	**85**	**30**	35	
S.2.1											20	**65**	**75**	**30**	35	
S.2.2											20	**40**	**45**	**25**	25	
S.2.3											20	**40**	**45**	**20**	20	
S.3.1											110	**95**	**100**	**110**	110	
S.3.2											65	**55**	**60**	**70**	70	
S.3.3											45	**40**	**45**	**50**	50	
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1														140	160	130
O.1.2																
O.2.1														150	140	105
O.2.2																
O.3.1																

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine.
The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

9

Cutting data standard values for diamond cutting materials CTD PD20 / PS30 / PU20 / CD10 / MD05

Index	Material group			a_p = 0,04–0,4 mm Surface roughness R_z in µm 2,5–5,0	a_p = 0,04–0,4 mm Surface roughness R_z in µm 5,0–10	a_p = 0,4–1,0 mm Surface roughness R_z in µm 2,5–5,0	a_p = 0,4–1,0 mm Surface roughness R_z in µm 5,0–10	a_p = 0,4–2,5 mm Surface roughness R_z in µm 2,5–5,0	a_p = 0,4–2,5 mm Surface roughness R_z in µm 5,0–10
				CTD ...	CTD ...	CTD ...	CTD ...	CTD ...	CTD ...
N.1.1 N.1.2	Aluminium wrought alloys without Si f=0.05–0.5 mm/rev.	○	Tool Material v_c in m/min	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**
		◐	Tool Material v_c in m/min		PD20 / CD10 **min. 400**		PD20 / CD10 **min. 400**		PD20 / CD10 **min. 400**
		◌	Tool Material v_c in m/min	PD20 / PU20 **min. 400**	PD20 / PU20 **min. 400**	PD20 / PU20 **min. 400**	PD20 / PU20 **min. 400**	PD20 / PU20 **min. 400**	PD20 / PU20 **min. 400**
N.2.1	Cast Aluminium Alloys Si≤12 % – hardened or Si=12–20% – non hardened f=0,05–0,5 mm/rev.	○	Tool Material v_c in m/min	PS30 / PU20 / CD10 / MD05 **min. 600**	PS30 / PU20 / CD10 / MD05 **min. 600**	PS30 / PU20 / CD10 / MD05 **min. 600**	PS30 / PU20 / CD10 / MD05 **min. 600**	PS30 / PU20 / CD10 / MD05 **min. 600**	PS30 / PU20 / CD10 / MD05 **min. 600**
		◐	Tool Material v_c in m/min	PD20 / PU20 / CD10 **min. 400**	PD20 / PU20 / CD10 **min. 400**	PD20 / PU20 / CD10 **min. 400**	PS30 / PU20 / CD10 **min. 600**	PS30 / PU20 / CD10 **min. 400**	PS30 / PU20 / CD10 **min. 400**
		◌	Tool Material v_c in m/min	PS30 **min. 600**	PS30 **min. 600**	PS30 **min. 600**	PS30 **min. 600**	PS30 **min. 600**	
N.2.2 N.2.3	Aluminium cast alloys Si=12–20 % f=0.05–0.5 mm/rev.	○	Tool Material v_c in m/min	PU20 / CD10 / MD05 **min. 800**	PU20 / CD10 / MD05 **min. 400**	PU20 / CD10 / MD05 **min. 700**	PU20 / CD10 / MD05 **min. 400**	PU20 / CD10 / MD05 **min. 600**	PU20 / CD10 / MD05 **min. 400**
		◐	Tool Material v_c in m/min		PU20 / CD10 **min. 600**		PU20 / CD10 **min. 600**		PU20 / CD10 **min. 600**
		◌	Tool Material v_c in m/min		PU20 **min. 600**		PU20 **min. 600**		
N.3.1 N.3.2 N.3.3	Copper and copper wrought alloys f=0.05–0.5 mm/rev.	○	Tool Material v_c in m/min	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**	PS30 / PU20 / CD10 / MD05 **300–1600**	PD20 / PU20 / CD10 / MD05 **min. 400**	PD20 / PU20 / CD10 / MD05 **min. 400**
		◐	Tool Material v_c in m/min	PU20 / CD10 **min. 300**	PD20 / PU20 / CD10 **min. 300**	PD20 / PU20 / CD10 **min. 400**	PS30 / PU20 / CD10 **min. 300**	PD20 / PU20 / CD10 **min. 400**	PD20 / PU20 / CD10 **min. 300**
		◌	Tool Material v_c in m/min		PD20 / PU20 **min. 300**		PS30 / PU20 **min. 300**	PD20 / PU20 **min. 300**	PS30 / PU20 **min. 200**
O.1.1 O.1.2	Plastic materials without reinforcement (acrylic glass) f=0.05–0.7 mm/rev.	○	Tool Material v_c in m/min		PD20 / CD10 / MD05 **min. 400**		PD20 / CD10 / MD05 **min. 300**		PS30 / CD10 / MD05 **min. 200**
		◐	Tool Material v_c in m/min		PD20 / CD10 **min. 300**		PD20 / CD10 **min. 200**		PS30 / CD10 **min. 200**
		◌	Tool Material v_c in m/min		PD20 / CD10 **min. 400**		PD20 / CD10 **min. 300**		PD20 / CD10 **min. 200**
O.2.1 O.2.2	Plastic materials with reinforcement (glass-fibre, carbon-fibre reinforced) f=0.05–0.7 mm/rev.	○	Tool Material v_c in m/min	PS30 / PU20 / CD10 / MD05 **min. 500**		PS30 / PU20 / CD10 / MD05 **min. 400**	PS30 / PU20 / CD10 / MD05 **min. 300**	PS30 / PU20 / CD10 / MD05 **min. 300**	PS30 / PU20 / CD10 / MD05 **min. 200**
		◐	Tool Material v_c in m/min	PS30 / PU20 / CD10 **min. 400**		PS30 / PU20 / CD10 **min. 300**	PS30 / PU20 / CD10 **min. 200**	PS30 / PU20 / CD10 **min. 200**	PS30 / PU20 / CD10 **min. 200**
		◌	Tool Material v_c in m/min	PU20 **min. 500**		PU20 **min. 400**	PU20 **min. 300**	PU20 **min. 300**	
O.3.1	Graphite		Tool Material v_c in m/min	PD20 / PS30 / PU20 / CD10 **min. 100**		PD20 / PS30 / PU20 / CD10 **min. 100**		PD20 / PS30 / PU20 / CD10 **min. 100**	

○ Smooth cut | ◐ Irregular cutting depth | ◌ Interrupted cut

Cutting data standard values for the CB chip breaker geometries

-CB1



3D-Chip Breaker -CB1				
Corner Radius	a_p in mm		f_z in mm/rev.	
	min.	max.	min.	max.
0,1 mm	0,05	0,30	0,02	0,05
0,2 mm	0,06	0,40	0,03	0,08
0,4 mm	0,10	0,80	0,04	0,15
0,8 mm	0,15	1,00	0,08	0,20
1,2 mm	0,30	1,50	0,12	0,25

- ▲ Finish and Superfinish
- ▲ Extremely sharp cutting edge geometry
- ▲ Depth of Cut a_p: 0.05–1.5 mm
- ▲ Smallest cutting pressure for highest accuracies
- ▲ For machining of thin-walled and unstable workpieces

-CB2



3D-Chip Breaker -CB2				
Corner Radius	a_p in mm		f_z in mm/rev.	
	min.	max.	min.	max.
0,2 mm	0,50	0,80	0,08	0,12
0,4 mm	0,60	1,50	0,08	0,20
0,8 mm	0,70	1,50	0,15	0,30
1,2 mm	0,80	2,00	0,20	0,40

- ▲ Semi-finish and Finish machining
- ▲ Negative edge preperation
- ▲ Cutting Depth a_p: 0,5–2,0 mm
- ▲ High surface quality and tight tolerances
- ▲ Machining of solid workpieces under stable conditions

-CB3



3D-Chip Breaker -CB3				
Corner Radius	a_p in mm		f_z in mm/rev.	
	min.	max.	min.	max.
0,4 mm	1,00	3,00	0,10	0,20
0,8 mm	1,00	3,00	0,15	0,35

- ▲ Medium and rough machining
- ▲ Highly aggressive chip breaker
- ▲ Cutting depth a_p: 1,0–3,0 mm
- ▲ Stable component conditions necessary
- ▲ Cooling must be ensured

Cutting data standard values for negative inserts

	Designation	-CF20 (Cermet)						-F50					
		f			a_p			f			a_p		
		min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
		mm/rev.			mm			mm/rev.			mm		
	CN.. 090304							0,06	**0,15**	0,25	0,2	**0,5**	1,5
	CN.. 090308							0,10	**0,20**	0,30	0,4	**1,0**	2,0
	CN.. 120404	0,05	**0,15**	0,25	0,3	**0,5**	1,5	0,06	**0,15**	0,25	0,2	**0,6**	1,5
	CN.. 120408	0,07	**0,15**	0,25	0,3	**0,5**	1,5	0,10	**0,20**	0,30	0,4	**1,0**	2,0
	CN.. 120412							0,14	**0,25**	0,35	0,6	**1,4**	2,6
	CN.. 120416												
	CN.. 160608												
	CN.. 160612												
	CN.. 160616												
	CN.. 160624												
	CN.. 190608												
	CN.. 190612												
	CN.. 190616												
	CN.. 190624												
	CN.. 250924												
	DN.. 110402							0,04	**0,10**	0,20	0,1	**0,4**	2,3
	DN.. 110404	0,05	**0,15**	0,25	0,3	**0,5**	1,5	0,06	**0,15**	0,25	0,2	**0,6**	1,5
	DN.. 110408	0,07	**0,15**	0,25	0,3	**0,5**	1,5	0,10	**0,20**	0,30	0,4	**1,0**	2,0
	DN.. 110412							0,14	**0,25**	0,35	0,6	**1,4**	2,6
	DN.. 150404							0,06	**0,15**	0,25	0,2	**0,6**	1,5
	DN.. 150408							0,10	**0,20**	0,30	0,4	**1,0**	2,0
	DN.. 150412							0,14	**0,25**	0,35	0,6	**1,4**	2,6
	DN.. 150416												
	DN.. 150604	0,05	**0,15**	0,25	0,3	**0,5**	1,5	0,06	**0,15**	0,25	0,2	**0,6**	1,5
	DN.. 150608	0,07	**0,15**	0,25	0,3	**0,5**	1,5	0,10	**0,20**	0,30	0,4	**1,0**	2,0
	DN.. 150612	0,10	**0,20**	0,30	0,5	**0,7**	1,5	0,14	**0,25**	0,35	0,6	**1,4**	2,6
	DN.. 150616												
	SN.. 090308							0,10	**0,20**	0,30	0,4	**1,0**	2,0
	SN.. 120404							0,06	**0,15**	0,25	0,2	**0,6**	1,5
	SN.. 120408							0,10	**0,20**	0,30	0,4	**1,0**	2,0
	SN.. 120412							0,14	**0,25**	0,35	0,6	**1,4**	2,6
	SN.. 120416												
	SN.. 150608												
	SN.. 150612												
	SN.. 150616												
	SN.. 190612												
	SN.. 190616												
	SN.. 190624												
	SN.. 250724												
	SN.. 250924												
	TN.. 110304							0,06	**0,15**	0,25	0,2	**0,6**	1,5
	TN.. 110308							0,10	**0,20**	0,30	0,4	**1,0**	2,0
	TN.. 160404	0,05	**0,15**	0,25	0,3	**0,5**	1,5	0,06	**0,15**	0,25	0,2	**0,6**	1,5
	TN.. 160408	0,07	**0,15**	0,25	0,3	**0,5**	1,5	0,10	**0,20**	0,30	0,4	**1,0**	2,0
	TN.. 160412	0,10	**0,20**	0,30	0,5	**0,7**	1,5	0,14	**0,25**	0,35	0,6	**1,4**	2,6
	TN.. 220404												
	TN.. 220408												
	TN.. 220412												
	TN.. 220416												
	VN.. 160404							0,06	**0,15**	0,25	0,2	**0,6**	1,5
	VN.. 160408							0,10	**0,20**	0,30	0,4	**1,0**	2,0
	VN.. 160412												
	WN.. 060404	0,05	**0,15**	0,25	0,3	**0,5**	1,5	0,06	**0,15**	0,25	0,2	**0,6**	1,5
	WN.. 060408	0,07	**0,15**	0,25	0,3	**0,5**	1,5	0,10	**0,20**	0,30	0,4	**1,0**	2,0
	WN.. 060412												
	WN.. 080404							0,06	**0,15**	0,25	0,2	**0,6**	1,5
	WN.. 080408	0,07	**0,15**	0,25	0,3	**0,5**	1,5	0,10	**0,20**	0,30	0,4	**1,0**	2,0
	WN.. 080412							0,14	**0,25**	0,35	0,6	**1,4**	2,6
	WN.. 080416												

Sharp ◄——————————————————————► stable

The data shows reference values. An adjustment to the actual conditions may be required.

Designation	-TFQ						-XU						-M50					
	f			a_p			f			a_p			f			a_p		
	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
	mm/rev.			mm			mm/rev.			mm			mm/rev.			mm		
CN.. 090304																		
CN.. 090308																		
CN.. 120404	0,10	**0,15**	0,35	0,4	**1,0**	3,0	0,08	**0,15**	0,25	0,3	**1,5**	2,5	0,10	**0,20**	0,30	0,4	**2,0**	5,0
CN.. 120408	0,10	**0,25**	0,50	0,5	**1,5**	4,0	0,13	**0,25**	0,35	0,6	**2,0**	3,0	0,15	**0,25**	0,40	0,6	**2,0**	5,0
CN.. 120412	0,15	**0,30**	0,70	0,8	**2,0**	5,0	0,15	**0,30**	0,45	0,9	**2,0**	3,5	0,20	**0,30**	0,50	1,0	**2,0**	5,0
CN.. 120416													0,25	**0,40**	0,60	1,4	**2,0**	5,0
CN.. 160608													0,15	**0,25**	0,40	0,6	**3,0**	8,0
CN.. 160612													0,20	**0,30**	0,50	1,0	**3,0**	8,0
CN.. 160616													0,25	**0,40**	0,60	1,4	**3,0**	8,0
CN.. 160624																		
CN.. 190608																		
CN.. 190612																		
CN.. 190616																		
CN.. 190624																		
CN.. 250924																		
DN.. 110402																		
DN.. 110404													0,10	**0,20**	0,30	0,4	**1,5**	4,0
DN.. 110408													0,15	**0,25**	0,40	0,6	**1,5**	4,0
DN.. 110412													0,20	**0,30**	0,50	1,0	**1,5**	4,0
DN.. 150404													0,10	**0,20**	0,30	0,4	**2,0**	5,0
DN.. 150408													0,15	**0,25**	0,40	0,6	**2,0**	5,0
DN.. 150412													0,20	**0,30**	0,50	1,0	**2,0**	5,0
DN.. 150416													0,25	**0,40**	0,60	1,4	**2,0**	5,0
DN.. 150604	0,10	**0,15**	0,30	0,4	**1,0**	3,0	0,08	**0,15**	0,25	0,3	**1,5**	2,5	0,10	**0,20**	0,30	0,4	**2,0**	5,0
DN.. 150608	0,10	**0,25**	0,40	0,5	**1,5**	4,0	0,13	**0,25**	0,35	0,6	**2,0**	3,0	0,15	**0,25**	0,40	0,6	**2,0**	5,0
DN.. 150612	0,1	**0,35**	0,5	1,0	**2,5**	4,0	0,15	**0,25**	0,40	0,9	**2,0**	3,5	0,20	**0,30**	0,50	1,0	**2,0**	5,0
DN.. 150616													0,25	**0,40**	0,60	1,4	**2,0**	5,0
SN.. 090308																		
SN.. 120404																		
SN.. 120408													0,15	**0,25**	0,40	0,6	**2,0**	5,0
SN.. 120412													0,20	**0,30**	0,50	1,0	**2,0**	5,0
SN.. 120416													0,25	**0,40**	0,60	1,4	**2,0**	5,0
SN.. 150608													0,15	**0,25**	0,40	0,6	**3,0**	8,0
SN.. 150612													0,20	**0,30**	0,50	1,0	**3,0**	8,0
SN.. 150616													0,25	**0,40**	0,60	1,4	**3,0**	8,0
SN.. 190612																		
SN.. 190616																		
SN.. 190624																		
SN.. 250724																		
SN.. 250924																		
TN.. 110304																		
TN.. 110308																		
TN.. 160404													0,10	**0,20**	0,30	0,4	**2,0**	5,0
TN.. 160408													0,15	**0,25**	0,40	0,6	**2,0**	5,0
TN.. 160412													0,20	**0,30**	0,50	1,0	**2,0**	5,0
TN.. 220404																		
TN.. 220408													0,15	**0,25**	0,40	0,6	**3,0**	8,0
TN.. 220412													0,20	**0,30**	0,50	1,0	**3,0**	8,0
TN.. 220416																		
VN.. 160404							0,08	**0,15**	0,20	0,3	**1,0**	1,8	0,10	**0,20**	0,30	0,4	**1,0**	4,0
VN.. 160408							0,13	**0,20**	0,30	0,6	**1,5**	2,5	0,15	**0,25**	0,40	0,6	**1,0**	4,0
VN.. 160412													0,20	**0,30**	0,50	1,0	**1,0**	4,0
WN.. 060404	0,10	**0,18**	0,35	0,4	**0,8**	3,0							0,10	**0,20**	0,30	0,4	**1,0**	3,0
WN.. 060408	0,10	**0,20**	0,50	0,5	**1,5**	3,0							0,15	**0,25**	0,40	0,6	**1,0**	3,0
WN.. 060412													0,20	**0,30**	0,50	1,0	**1,0**	3,0
WN.. 080404	0,1	**0,15**	0,35	0,4	**1,0**	3,0	0,08	**0,15**	0,25	0,3	**1,5**	2,5	0,10	**0,20**	0,30	0,4	**1,5**	4,0
WN.. 080408	0,10	**0,25**	0,50	0,5	**1,5**	4,0	0,13	**0,22**	0,35	0,6	**2,0**	3,0	0,15	**0,25**	0,40	0,6	**1,5**	4,0
WN.. 080412	0,15	**0,30**	0,70	0,8	**2,0**	5,0	0,15	**0,25**	0,45	0,9	**2,0**	3,5	0,20	**0,30**	0,50	1,0	**1,5**	4,0
WN.. 080416													0,25	**0,40**	0,60	1,4	**1,5**	4,0

Sharp ◄——————————————————————► stable

Information on the cutting data of chip breakers not included in this overview, can be found on → **Page 211–217**

Cutting data standard values for negative inserts

	Designation	-TMQ						-M70					
		f			a_p			f			a_p		
		min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
		mm/rev.			mm			mm/rev.			mm		
	CN.. 090304												
	CN.. 090308												
	CN.. 120404												
	CN.. 120408	0,20	**0,40**	0,65	0,8	**3,0**	5,0	0,20	**0,30**	0,45	0,8	**3,0**	6,0
	CN.. 120412	0,25	**0,50**	0,85	1,0	**3,0**	6,0	0,25	**0,40**	0,60	1,2	**3,0**	6,0
	CN.. 120416							0,30	**0,45**	0,70	1,6	**3,0**	6,0
	CN.. 160608							0,20	**0,30**	0,45	0,8	**4,0**	8,0
	CN.. 160612							0,25	**0,40**	0,60	1,2	**4,0**	8,0
	CN.. 160616							0,30	**0,45**	0,70	1,6	**4,0**	8,0
	CN.. 160624							0,40	**0,70**	1,20	2,4	**4,0**	8,0
	CN.. 190608							0,20	**0,30**	0,45	0,8	**4,5**	9,0
	CN.. 190612							0,25	**0,40**	0,60	1,2	**4,5**	9,0
	CN.. 190616							0,30	**0,45**	0,70	1,6	**4,5**	9,0
	CN.. 190624							0,40	**0,70**	1,20	2,4	**4,5**	9,0
	CN.. 250924							0,40	**0,70**	1,20	2,4	**6,0**	13,0
	DN.. 110402												
	DN.. 110404												
	DN.. 110408							0,20	**0,25**	0,45	0,8	**2,0**	5,0
	DN.. 110412							0,25	**0,35**	0,60	1,2	**2,0**	5,0
	DN.. 150404												
	DN.. 150408							0,20	**0,25**	0,45	0,8	**2,5**	6,0
	DN.. 150412							0,25	**0,35**	0,60	1,2	**2,5**	6,0
	DN.. 150416							0,30	**0,40**	0,70	1,6	**2,5**	6,0
	DN.. 150604												
	DN.. 150608	0,15	**0,30**	0,50	0,8	**2,5**	5,0	0,20	**0,25**	0,45	0,8	**2,5**	6,0
	DN.. 150612	0,20	**0,40**	0,60	1,0	**3,0**	5,0	0,25	**0,35**	0,60	1,2	**2,5**	6,0
	DN.. 150616							0,30	**0,40**	0,70	1,6	**2,5**	6,0
	SN.. 090308												
	SN.. 120404												
	SN.. 120408							0,20	**0,30**	0,50	0,8	**3,0**	6,0
	SN.. 120412							0,25	**0,40**	0,65	1,2	**3,0**	6,0
	SN.. 120416							0,30	**0,45**	0,70	1,6	**3,0**	6,0
	SN.. 150608												
	SN.. 150612							0,25	**0,40**	0,65	1,2	**4,0**	8,0
	SN.. 150616							0,30	**0,45**	0,75	1,6	**4,0**	8,0
	SN.. 190612							0,25	**0,40**	0,65	1,2	**4,5**	9,0
	SN.. 190616							0,30	**0,45**	0,75	1,6	**4,5**	9,0
	SN.. 190624							0,40	**0,70**	1,20	2,4	**4,5**	9,0
	SN.. 250724												
	SN.. 250924							0,40	**0,70**	1,20	2,4	**6,0**	13,0
	TN.. 110304												
	TN.. 110308												
	TN.. 160404												
	TN.. 160408							0,20	**0,25**	0,45	0,8	**2,5**	6,0
	TN.. 160412							0,25	**0,35**	0,60	1,2	**2,5**	6,0
	TN.. 220404							0,15	**0,20**	0,30	0,4	**3,0**	7,0
	TN.. 220408							0,20	**0,25**	0,45	0,8	**3,0**	7,0
	TN.. 220412							0,25	**0,35**	0,60	1,2	**3,0**	7,0
	TN.. 220416							0,30	**0,40**	0,70	1,6	**3,0**	7,0
	VN.. 160404												
	VN.. 160408												
	VN.. 160412												
	WN.. 060404												
	WN.. 060408							0,20	**0,30**	0,45	0,8	**2,0**	4,0
	WN.. 060412							0,25	**0,40**	0,60	1,2	**2,0**	4,0
	WN.. 080404												
	WN.. 080408	0,20	**0,30**	0,65	0,8	**3,0**	5,0	0,20	**0,30**	0,45	0,8	**2,5**	5,0
	WN.. 080412	0,25	**0,40**	0,85	1,0	**3,0**	6,0	0,25	**0,40**	0,60	1,2	**2,5**	5,0
	WN.. 080416							0,30	**0,45**	0,70	1,6	**2,5**	5,0

Sharp ◄——————————————————————► stable

The data shows reference values. An adjustment to the actual conditions may be required.

Designation	-R28						-R58						-R88					
	f			a_p			f			a_p			f			a_p		
	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
	mm/rev.			mm			mm/rev.			mm			mm/rev.			mm		
CN.. 090304																		
CN.. 090308																		
CN.. 120404																		
CN.. 120408	0,25	**0,35**	0,55	0,8	**3,0**	7,0	0,25	**0,45**	0,70	1,0	**3,0**	7,0						
CN.. 120412	0,30	**0,45**	0,70	1,0	**3,0**	7,0	0,30	**0,55**	0,85	1,5	**3,0**	7,0						
CN.. 120416	0,30	**0,60**	0,90	1,5	**3,0**	7,0	0,35	**0,65**	1,00	2,0	**3,0**	7,0						
CN.. 160608																		
CN.. 160612	0,30	**0,45**	0,70	1,0	**4,0**	9,0	0,30	**0,55**	0,85	1,5	**4,0**	9,0						
CN.. 160616	0,35	**0,60**	0,90	1,5	**4,0**	9,0	0,35	**0,65**	1,00	2,0	**4,0**	9,0						
CN.. 160624							0,40	**0,75**	1,20	2,5	**4,0**	9,0	0,40	**0,70**	1,20	2,0	**5,0**	9,0
CN.. 190608																		
CN.. 190612	0,30	**0,45**	0,70	1,0	**5,5**	12,0	0,35	**0,55**	0,85	1,5	**5,5**	12,0						
CN.. 190616	0,35	**0,60**	0,90	1,5	**5,5**	12,0	0,40	**0,65**	1,00	2,0	**5,5**	12,0	0,40	**0,70**	1,00	2,0	**5,0**	12,0
CN.. 190624	0,35	**0,65**	1,00	2,0	**5,5**	12,0	0,40	**0,75**	1,20	2,5	**5,5**	12,0	0,40	**0,70**	1,20	2,0	**5,0**	12,0
CN.. 250924	0,35	**0,7**	1,0	2,0	**7,0**	16,0	0,45	**0,80**	1,30	2,5	**8,0**	16,0	0,60	**1,00**	1,50	3,5	**10,0**	18,0
DN.. 110402																		
DN.. 110404																		
DN.. 110408																		
DN.. 110412																		
DN.. 150404																		
DN.. 150408																		
DN.. 150412																		
DN.. 150416																		
DN.. 150604																		
DN.. 150608																		
DN.. 150612	0,25	**0,45**	0,70	1,0	**2,5**	6,0	0,30	**0,50**	0,80	1,5	**2,5**	6,0						
DN.. 150616	0,30	**0,60**	0,85	1,5	**2,5**	6,0	0,35	**0,60**	0,90	2,0	**2,5**	6,0						
SN.. 090308																		
SN.. 120404																		
SN.. 120408							0,25	**0,45**	0,70	1,0	**3,0**	7,0						
SN.. 120412							0,30	**0,55**	0,85	1,5	**3,0**	7,0						
SN.. 120416																		
SN.. 150608																		
SN.. 150612	0,30	**0,35**	0,70	1,0	**4,0**	9,0	0,30	**0,55**	0,85	1,5	**4,0**	9,0						
SN.. 150616	0,35	**0,60**	0,90	1,5	**4,0**	9,0	0,35	**0,65**	1,00	2,0	**4,0**	9,0						
SN.. 190612							0,35	**0,55**	0,85	1,5	**5,5**	12,0						
SN.. 190616	0,35	**0,60**	0,90	1,5	**5,5**	12,0	0,40	**0,65**	1,00	2,0	**5,5**	12,0	0,40	**0,70**	1,00	2,0	**5,0**	12,0
SN.. 190624							0,40	**0,75**	1,20	2,0	**5,5**	12,0	0,40	**0,70**	1,20	2,0	**5,0**	12,0
SN.. 250724	0,35	**0,65**	1,00	2,0	**7,0**	16,0	0,45	**0,80**	1,30	2,5	**8,0**	16,0	0,60	**1,00**	1,50	3,5	**10,0**	18,0
SN.. 250924	0,35	**0,65**	1,00	2,0	**7,0**	16,0	0,45	**0,80**	1,30	2,5	**8,0**	16,0	0,60	**1,00**	1,50	3,5	**10,0**	18,0
TN.. 110304																		
TN.. 110308																		
TN.. 160404																		
TN.. 160408																		
TN.. 160412																		
TN.. 220404																		
TN.. 220408																		
TN.. 220412							0,30	**0,50**	0,80	1,5	**3,0**	7,0						
TN.. 220416	0,30	**0,55**	0,85	1,5	**3,0**	7,0												
VN.. 160404																		
VN.. 160408																		
VN.. 160412																		
WN.. 060404																		
WN.. 060408																		
WN.. 060412																		
WN.. 080404																		
WN.. 080408																		
WN.. 080412																		
WN.. 080416																		

Sharp ◄——————————————————————► stable

Information on the cutting data of chip breakers not included in this overview, can be found on → **Page 211–217**

Cutting data standard values for negative inserts

	Designation	-F30						-M30					
		f			a_p			f			a_p		
		min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
		mm/rev.			mm			mm/rev.			mm		
	CN.. 090304												
	CN.. 090308												
	CN.. 120404	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	CN.. 120408	0,10	**0,22**	0,35	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**2,0**	4,5
	CN.. 120412							0,20	**0,30**	0,50	1,2	**2,5**	5,0
	CN.. 120416							0,25	**0,35**	0,55	1,6	**2,5**	5,0
	CN.. 160608												
	CN.. 160612												
	CN.. 160616												
	CN.. 160624												
	CN.. 190608												
	CN.. 190612												
	CN.. 190616												
	CN.. 190624												
	CN.. 250924												
	DN.. 110402												
	DN.. 110404	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	DN.. 110408	0,10	**0,20**	0,35	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**2,0**	4,5
	DN.. 110412							0,20	**0,30**	0,50	1,2	**2,0**	4,5
	DN.. 150404	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	DN.. 150408	0,1	**0,2**	0,35	0,8	**1,5**	2,5	0,15	**0,25**	0,35	1,0	**2,5**	4,0
	DN.. 150412							0,2	**0,3**	0,5	1,0	**2,5**	4,0
	DN.. 150416												
	DN.. 150604	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	DN.. 150608	0,10	**0,20**	0,35	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**2,0**	5,5
	DN.. 150612							0,20	**0,30**	0,50	1,2	**2,0**	5,5
	DN.. 150616												
	SN.. 090308												
	SN.. 120404	0,10	**0,15**	0,30	0,4	**1,0**	2,0						
	SN.. 120408	0,15	**0,20**	0,40	0,8	**1,5**	2,5	0,20	**0,25**	0,45	1,0	**2,0**	4,5
	SN.. 120412	0,15	**0,20**	0,40	1,2	**1,8**	2,5	0,25	**0,30**	0,50	1,2	**2,0**	5,0
	SN.. 120416												
	SN.. 150608												
	SN.. 150612												
	SN.. 150616												
	SN.. 190612												
	SN.. 190616												
	SN.. 190624												
	SN.. 250724												
	SN.. 250924												
	TN.. 110304												
	TN.. 110308												
	TN.. 160404	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	TN.. 160408	0,10	**0,15**	0,35	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**2,0**	4,5
	TN.. 160412							0,20	**0,30**	0,50	1,2	**2,0**	4,5
	TN.. 220404												
	TN.. 220408												
	TN.. 220412												
	TN.. 220416												
	VN.. 160404	0,08	**0,10**	0,20	0,4	**1,0**	2,0						
	VN.. 160408	0,10	**0,15**	0,30	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**1,5**	4,0
	VN.. 160412												
	WN.. 060404	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	WN.. 060408	0,10	**0,20**	0,30	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**1,5**	3,5
	WN.. 060412							0,20	**0,30**	0,45	1,2	**1,5**	4,0
	WN.. 080404	0,05	**0,15**	0,25	0,4	**1,0**	2,0						
	WN.. 080408	0,10	**0,20**	0,35	0,8	**1,5**	2,5	0,15	**0,25**	0,40	1,0	**2,0**	4,5
	WN.. 080412							0,20	**0,30**	0,50	1,2	**2,0**	5,0
	WN.. 080416												

Sharp ◄——————————————————————► stable

The data shows reference values. An adjustment to the actual conditions may be required.

Designation	-M60						-M34						-M42					
	f			a_p			f			a_p			f			a_p		
	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
	mm/rev.			mm			mm/rev.			mm			mm/rev.			mm		
CN.. 090304																		
CN.. 090308																		
CN.. 120404							0,08	**0,12**	0,18	1,0	**1,5**	3,0	0,1	**0,2**	0,25	0,8	**1,5**	4,0
CN.. 120408	0,25	**0,30**	0,50	1,5	**2,5**	6,0	0,10	**0,15**	0,35	1,0	**1,8**	3,5	0,2	**0,3**	0,44	1,0	**2,5**	4,0
CN.. 120412	0,30	**0,35**	0,55	2,0	**3,0**	6,0	0,13	**0,20**	0,40	1,5	**2,0**	4,0	0,28	**0,35**	0,55	1,2	**3,0**	4,2
CN.. 120416	0,30	**0,40**	0,60	2,0	**3,0**	6,0	0,15	**0,25**	0,45	2,0	**3,0**	4,5						
CN.. 160608																		
CN.. 160612	0,30	**0,35**	0,55	2,0	**3,0**	8,0												
CN.. 160616																		
CN.. 160624																		
CN.. 190608																		
CN.. 190612																		
CN.. 190616																		
CN.. 190624																		
CN.. 250924																		
DN.. 110402																		
DN.. 110404													0,15	**0,25**	0,3	1,0	**2,0**	3,5
DN.. 110408													0,2	**0,3**	0,4	1,2	**2,5**	4,0
DN.. 110412																		
DN.. 150404							0,08	**0,12**	0,18	0,8	**1,2**	2,5	0,15	**0,25**	0,35	1,0	**2,0**	4,0
DN.. 150408	0,25	**0,3**	0,45	1,5	**2,5**	6,0	0,10	**0,15**	0,30	1,0	**1,8**	3,5	0,2	**0,3**	0,4	1,2	**2,5**	5,0
DN.. 150412	0,3	**0,4**	0,55	1,5	**2,5**	6,0	0,13	**0,20**	0,38	1,5	**2,0**	4,0						
DN.. 150416																		
DN.. 150604													0,15	**0,25**	0,35	1,0	**2,0**	4,0
DN.. 150608	0,25	**0,30**	0,45	1,5	**2,5**	6,0	0,10	**0,15**	0,30	1,0	**1,8**	3,5	0,2	**0,3**	0,44	1,2	**2,5**	5,0
DN.. 150612	0,30	**0,40**	0,55	1,5	**2,5**	6,0	0,13	**0,20**	0,38	1,5	**2,0**	4,0						
DN.. 150616																		
SN.. 090308																		
SN.. 120404																		
SN.. 120408	0,30	**0,35**	0,50	1,5	**2,0**	6,0	0,15	**0,25**	0,40	1,0	**2,0**	4,0	0,15	**0,25**	0,4	1,0	**2,0**	4,5
SN.. 120412	0,30	**0,40**	0,55	2,0	**2,5**	6,0	0,15	**0,25**	0,45	1,5	**2,5**	4,5	0,2	**0,25**	0,45	1,0	**2,0**	5,0
SN.. 120416	0,30	**0,40**	0,60	2,0	**2,5**	6,0												
SN.. 150608																		
SN.. 150612																		
SN.. 150616																		
SN.. 190612																		
SN.. 190616																		
SN.. 190624																		
SN.. 250724																		
SN.. 250924																		
TN.. 110304																		
TN.. 110308																		
TN.. 160404													0,1	**0,2**	0,3	0,8	**2,0**	5,0
TN.. 160408	0,25	**0,25**	0,45	1,5	**2,5**	5,0	0,10	**0,15**	0,35	1,0	**2,0**	4,0	0,12	**0,2**	0,35	0,8	**2,0**	5,0
TN.. 160412	0,30	**0,30**	0,55	2,0	**2,5**	5,5												
TN.. 220404							0,10	**0,15**	0,35	1,0	**2,0**	4,0						
TN.. 220408							0,13	**0,20**	0,40	1,5	**2,5**	4,0						
TN.. 220412																		
TN.. 220416							0,15	**0,25**	0,45	2,0	**2,5**	4,5						
VN.. 160404							0,07	**0,10**	0,18	0,8	**1,2**	2,0						
VN.. 160408							0,10	**0,15**	0,20	1,0	**1,5**	2,5						
VN.. 160412							0,13	**0,18**	0,25	1,5	**1,8**	3,0						
WN.. 060404													0,1	**0,22**	0,35	0,5	**1,0**	3,0
WN.. 060408	0,25	**0,30**	0,45	1,5	**2,0**	4,0							0,1	**0,22**	0,35	0,5	**1,0**	3,0
WN.. 060412	0,30	**0,35**	0,50	2,0	**2,5**	4,5												
WN.. 080404													0,1	**0,2**	0,35	0,4	**1,5**	4,0
WN.. 080408	0,25	**0,30**	0,50	1,5	**2,0**	5,0	0,10	**0,15**	0,35	1,0	**2,0**	4,0	0,15	**0,25**	0,4	0,8	**1,5**	4,0
WN.. 080412	0,30	**0,35**	0,55	2,0	**2,5**	5,5	0,13	**0,20**	0,40	1,5	**2,0**	4,0	0,2	**0,3**	0,45	1,0	**2,0**	4,0
WN.. 080416																		

Sharp ◄——————————————————► stable

Information on the cutting data of chip breakers not included in this overview, can be found on → **Page 211–217**

Cutting data values for positive inserts

	Designation	-CF05						-SF					
		f			a_p			f			a_p		
		min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
		mm/rev.			mm			mm/rev.			mm		
	CC.. 060200							0,02	**0,035**	0,05	0,1	**0,4**	1,5
	CC.. 060201							0,02	**0,035**	0,05	0,2	**0,4**	1,5
	CC.. 060202	0,03	**0,08**	0,12	0,1	**0,3**	1,3	0,03	**0,1**	0,15	0,2	**0,4**	1,5
	CC.. 060204	0,05	**0,10**	0,12	0,1	**0,3**	1,3	0,05	**0,1**	0,2	0,2	**0,6**	1,5
	CC.. 060208							0,05	**0,125**	0,2	0,2	**1**	1,5
	CC.. 09T300							0,02	**0,035**	0,05	0,2	**0,75**	2
	CC.. 09T301							0,02	**0,035**	0,05	0,2	**0,75**	2
	CC.. 09T302	0,03	**0,08**	0,12	0,1	**0,3**	1,3	0,05	**0,075**	0,1	0,2	**0,75**	2
	CC.. 09T304	0,05	**0,10**	0,22	0,2	**0,4**	1,3	0,05	**0,12**	0,2	0,2	**0,75**	2
	CC.. 09T308	0,06	**0,13**	0,25	0,2	**0,4**	1,3	0,05	**0,125**	0,25	0,4	**1**	2
	CC.. 09T312												
	CC.. 120402							0,05	**0,075**	0,1	0,2	**0,8**	2,5
	CC.. 120404							0,05	**0,12**	0,2	0,2	**1**	2,5
	CC.. 120408							0,08	**0,15**	0,25	0,4	**1**	2,5
	CC.. 120412							0,08	**0,15**	0,25	0,4	**1,5**	2,5
	DC.. 0702005												
	DC.. 070201												
	DC.. 0702015												
	DC.. 070202	0,03	**0,08**	0,12	0,1	**0,3**	1,3	0,03	**0,1**	0,15	0,1	**0,4**	1,5
	DC.. 070204	0,05	**0,10**	0,22	0,2	**0,4**	1,3	0,05	**0,12**	0,2	0,2	**0,6**	1,5
	DC.. 070208												
	DC.. 11T3005												
	DC.. 11T301												
	DC.. 11T3015												
	DC.. 11T302	0,03	**0,08**	0,12	0,1	**0,3**	1,3						
	DC.. 11T304	0,05	**0,10**	0,22	0,2	**0,4**	1,3	0,05	**0,12**	0,2	0,2	**0,7**	2
	DC.. 11T308	0,06	**0,13**	0,25	0,2	**0,4**	1,3	0,08	**0,15**	0,25	0,4	**1**	2
	DC.. 11T312												
	RC.. 0602MO												
	RC.. 0803MO												
	RC.. 1003MO												
	RC.. 1204MO												
	RC.. 1606MO												
	RC.. 2006MO												
	RC.. 2507MO												
	SC.. 09T304	0,05	**0,10**	0,22	0,2	**0,4**	1,3	0,05	**0,12**	0,2	0,2	**0,7**	2
	SC.. 09T308	0,06	**0,13**	0,25	0,2	**0,4**	1,3	0,08	**0,15**	0,25	0,4	**1**	2
	SC.. 120408							0,08	**0,15**	0,25	0,4	**1**	2,5
	SC.. 120412												
	TC.. 090204												
	TC.. 110202	0,03	**0,08**	0,12	0,1	**0,3**	1,3						
	TC.. 110204	0,05	**0,10**	0,22	0,2	**0,4**	1,3	0,05	**0,12**	0,2	0,2	**0,7**	2
	TC.. 110208	0,06	**0,13**	0,25	0,2	**0,4**	1,3	0,08	**0,15**	0,25	0,4	**1**	2
	TC.. 16T302												
	TC.. 16T304	0,05	**0,10**	0,22	0,2	**0,4**	1,3	0,05	**0,12**	0,2	0,2	**0,8**	2,5
	TC.. 16T308							0,08	**0,15**	0,25	0,4	**1**	2,5
	TC.. 16T312												
	TC.. 220408												
	VC.. 1103005												
	VC.. 110301												
	VC.. 1103015												
	VC.. 110302	0,03	**0,06**	0,12	0,1	**0,3**	1,3	0,02	**0,08**	0,15	0,1	**0,4**	1,5
	VC.. 110304	0,05	**0,08**	0,22	0,2	**0,4**	1,3	0,05	**0,1**	0,2	0,2	**0,6**	1,5
	VC.. 110308							0,08	**0,12**	0,22	0,4	**1**	1,5
	VC.. 160402												
	VC.. 160404	0,05	**0,08**	0,22	0,2	**0,4**	1,3	0,05	**0,1**	0,2	0,2	**0,7**	2
	VC.. 160408	0,06	**0,10**	0,22	0,2	**0,4**	1,3	0,08	**0,12**	0,22	0,4	**1**	2
	VC.. 160412												
	VC.. 220530												
	WC.. 020102							0,02	**0,075**	0,1	0,1	**0,4**	1
	WC.. 020104							0,02	**0,1**	0,2	0,1	**0,6**	1,5

Sharp ◄——————————————————————► stable

The data shows reference values. An adjustment to the actual conditions may be required.

Designation	-CF55						-SMF						-SM					
	f			a_p			f			a_p			f			a_p		
	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
	mm/rev.			mm			mm/rev.			mm			mm/rev.			mm		
CC.. 060200																		
CC.. 060201																		
CC.. 060202													0,04	**0,12**	0,2	0,2	**0,6**	2,5
CC.. 060204	0,05	**0,12**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,25	0,3	**0,7**	2	0,08	**0,17**	0,3	0,4	**0,8**	2,5
CC.. 060208							0,1	**0,17**	0,27	0,6	**1**	2	0,12	**0,2**	0,35	0,8	**1**	2,5
CC.. 09T300																		
CC.. 09T301																		
CC.. 09T302																		
CC.. 09T304	0,05	**0,12**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,25	0,3	**0,8**	2,5	0,08	**0,17**	0,3	0,4	**1**	3
CC.. 09T308	0,06	**0,15**	0,25	0,2	**0,5**	1,3	0,1	**0,17**	0,27	0,6	**1**	2,5	0,12	**0,2**	0,35	0,8	**1,2**	3
CC.. 09T312													0,15	**0,22**	0,4	1,2	**1,5**	3
CC.. 120402																		
CC.. 120404	0,05	**0,12**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,25	0,3	**1**	3	0,08	**0,17**	0,3	0,4	**1,2**	3,5
CC.. 120408							0,1	**0,17**	0,27	0,6	**1,2**	3	0,12	**0,2**	0,35	0,8	**1,5**	3,5
CC.. 120412													0,15	**0,22**	0,4	1,2	**2**	3,5
DC.. 0702005																		
DC.. 070201																		
DC.. 0702015																		
DC.. 070202	0,03	**0,10**	0,12	0,1	**0,4**	1,3							0,04	**0,12**	0,2	0,2	**0,6**	2,5
DC.. 070204	0,05	**0,12**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,25	0,3	**0,7**	2	0,08	**0,17**	0,3	0,4	**0,8**	2,5
DC.. 070208							0,1	**0,17**	0,27	0,6	**1**	2	0,12	**0,2**	0,3	0,8	**1**	2,5
DC.. 11T3005																		
DC.. 11T301																		
DC.. 11T3015																		
DC.. 11T302																		
DC.. 11T304	0,05	**0,12**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,25	0,3	**0,8**	2,5	0,8	**0,17**	0,3	0,4	**1**	3
DC.. 11T308	0,06	**0,15**	0,25	0,2	**0,5**	1,3	0,1	**0,17**	0,27	0,6	**1,2**	2,5	0,12	**0,2**	0,35	0,8	**1,2**	3
DC.. 11T312													0,15	**0,22**	0,4	1,2	**1,7**	3
RC.. 0602MO													0,2	**0,3**	0,5	0,2	**0,5**	1,5
RC.. 0803MO													0,2	**0,3**	0,6	0,2	**0,6**	2
RC.. 1003MO													0,25	**0,4**	0,7	0,2	**0,7**	2,5
RC.. 1204MO													0,3	**0,5**	0,8	0,2	**0,8**	3
RC.. 1606MO							0,15	**0,3**	0,6	0,25	**2**	3,5	0,4	**0,6**	1	0,3	**1**	3,5
RC.. 2006MO													0,5	**0,8**	1,2	0,4	**1,2**	4
RC.. 2507MO													0,6	**0,9**	1,4	0,6	**2**	5
SC.. 09T304	0,05	**0,12**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,25	0,3	**0,8**	2,5	0,08	**0,17**	0,3	0,4	**1**	3
SC.. 09T308	0,06	**0,15**	0,25	0,2	**0,5**	1,3	0,1	**0,17**	0,27	0,6	**1**	2,5	0,12	**0,2**	0,35	0,8	**1,2**	3
SC.. 120408							0,1	**0,17**	0,27	0,6	**1,2**	3	0,12	**0,2**	0,35	0,8	**1,5**	3,5
SC.. 120412													0,15	**0,22**	0,4	1,2	**2**	3,5
TC.. 090204													0,08	**0,12**	0,2	0,4	**0,8**	2
TC.. 110202													0,08	**0,1**	0,2	0,4	**0,6**	3
TC.. 110204	0,05	**0,12**	0,22	0,2	**0,5**	1,3							0,12	**0,2**	0,35	0,8	**1,2**	3
TC.. 110208							0,1	**0,17**	0,27	0,6	**1**	2,5	0,12	**0,2**	0,35	0,8	**1,2**	3
TC.. 16T302																		
TC.. 16T304							0,07	**0,15**	0,25	0,3	**1**	3	0,08	**0,17**	0,3	0,4	**1,2**	3,5
TC.. 16T308	0,06	**0,15**	0,25	0,2	**0,5**	1,3	0,1	**0,17**	0,27	0,6	**1,2**	3	0,12	**0,2**	0,35	0,8	**1,5**	3,5
TC.. 16T312													0,15	**0,22**	0,4	1,2	**1,7**	3,5
TC.. 220408													0,12	**0,2**	0,35	0,8	**2,5**	6
VC.. 1103005																		
VC.. 110301																		
VC.. 1103015																		
VC.. 110302							0,05	**0,1**	0,18	0,2	**0,5**	2						
VC.. 110304	0,05	**0,10**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,23	0,3	**0,7**	2						
VC.. 110308																		
VC.. 160402																		
VC.. 160404	0,05	**0,10**	0,22	0,2	**0,5**	1,3	0,07	**0,15**	0,23	0,3	**0,8**	2,5	0,08	**0,17**	0,25	0,4	**1**	3
VC.. 160408	0,06	**0,12**	0,22	0,2	**0,5**	1,3	0,1	**0,17**	0,27	0,6	**1**	2,5	0,12	**0,2**	0,3	0,8	**1,2**	3
VC.. 160412													0,15	**0,22**	0,32	1,2	**1,5**	3
VC.. 220530																		
WC.. 020102																		
WC.. 020104																		

Sharp ◄——► stable

Information on the cutting data of chip breakers not included in this overview, can be found on → **Page 211–217**

9

Cutting data values for positive inserts

	Designation	-SMQ						-M25					
		f			a_p			f			a_p		
		min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
		mm/rev.			mm			mm/rev.			mm		
	CC.. 060200												
	CC.. 060201												
	CC.. 060202												
	CC.. 060204							0,06	**0,13**	0,20	0,2	**1,1**	2,0
	CC.. 060208												
	CC.. 09T300												
	CC.. 09T301												
	CC.. 09T302												
	CC.. 09T304	0,10	**0,25**	0,4	0,4	**2**	4	0,06	**0,14**	0,22	0,2	**1,2**	2,2
	CC.. 09T308	0,15	**0,30**	0,5	0,8	**2**	4	0,10	**0,20**	0,30	0,4	**1,8**	3,2
	CC.. 09T312												
	CC.. 120402												
	CC.. 120404	0,10	**0,25**	0,4	0,4	**2**	4						
	CC.. 120408	0,15	**0,30**	0,5	0,8	**2**	4						
	CC.. 120412												
	DC.. 0702005												
	DC.. 070201												
	DC.. 0702015												
	DC.. 070202							0,04	**0,09**	0,13	0,1	**0,9**	1,6
	DC.. 070204	0,10	**0,18**	0,25	0,4	**1,5**	3	0,06	**0,12**	0,18	0,2	**1,1**	2,0
	DC.. 070208												
	DC.. 11T3005												
	DC.. 11T301												
	DC.. 11T3015												
	DC.. 11T302							0,04	**0,10**	0,16	0,1	**1,1**	2,0
	DC.. 11T304	0,10	**0,25**	0,4	0,4	**2**	4	0,06	**0,14**	0,22	0,2	**1,2**	2,2
	DC.. 11T308	0,15	**0,30**	0,5	0,8	**2**	4	0,10	**0,20**	0,30	0,4	**1,8**	3,2
	DC.. 11T312												
	RC.. 0602MO												
	RC.. 0803MO												
	RC.. 1003MO												
	RC.. 1204MO												
	RC.. 1606MO												
	RC.. 2006MO												
	RC.. 2507MO												
	SC.. 09T304												
	SC.. 09T308												
	SC.. 120408												
	SC.. 120412												
	TC.. 090204												
	TC.. 110202												
	TC.. 110204							0,06	**0,13**	0,20	0,2	**1,2**	2,2
	TC.. 110208												
	TC.. 16T302												
	TC.. 16T304							0,06	**0,14**	0,22	0,2	**1,6**	3,0
	TC.. 16T308							0,10	**0,20**	0,30	0,4	**1,9**	3,4
	TC.. 16T312												
	TC.. 220408												
	VC.. 1103005												
	VC.. 110301												
	VC.. 1103015												
	VC.. 110302												
	VC.. 110304												
	VC.. 110308												
	VC.. 160402												
	VC.. 160404							0,06	**0,13**	0,20	0,2	**1,2**	2,2
	VC.. 160408							0,10	**0,15**	0,25	0,4	**1,4**	3,0
	VC.. 160412												
	VC.. 220530												
	WC.. 020102												
	WC.. 020104												

Sharp ◄——————————————————————————► stable

The data shows reference values. An adjustment to the actual conditions may be required.

Designation	-M55						-F05					
	f			a_p			f			a_p		
	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
	mm/rev.			mm			mm/rev.			mm		
CC.. 060200												
CC.. 060201							0,02	**0,03**	0,05	0,1	**1**	2
CC.. 060202							0,02	**0,05**	0,1	0,1	**1**	2
CC.. 060204	0,06	**0,13**	0,20	0,4	**1,5**	2,6	0,02	**0,1**	0,2	0,1	**1**	2
CC.. 060208												
CC.. 09T300												
CC.. 09T301												
CC.. 09T302												
CC.. 09T304	0,08	**0,16**	0,24	0,4	**1,7**	3,0						
CC.. 09T308	0,12	**0,24**	0,35	0,8	**2,4**	4,0						
CC.. 09T312												
CC.. 120402												
CC.. 120404	0,08	**0,18**	0,28	0,4	**2,2**	4,0						
CC.. 120408	0,12	**0,26**	0,40	0,8	**2,8**	4,8						
CC.. 120412												
DC.. 0702005							0,02	**0,025**	0,04	0,1	**1**	2
DC.. 070201							0,02	**0,03**	0,05	0,1	**1**	2
DC.. 0702015							0,02	**0,04**	0,075	0,1	**1**	2
DC.. 070202							0,02	**0,05**	0,1	0,1	**1**	2
DC.. 070204	0,06	**0,14**	0,22	0,4	**1,3**	2,2						
DC.. 070208	0,08	**0,16**	0,24	0,8	**1,6**	2,4						
DC.. 11T3005							0,02	**0,025**	0,04	0,1	**1,25**	2,5
DC.. 11T301							0,02	**0,03**	0,05	0,1	**1,25**	2,5
DC.. 11T3015							0,02	**0,04**	0,075	0,1	**1,25**	2,5
DC.. 11T302							0,02	**0,075**	0,1	0,1	**1,25**	2,5
DC.. 11T304	0,08	**0,16**	0,24	0,4	**1,7**	3,0	0,02	**0,1**	0,25	0,1	**1,25**	2,5
DC.. 11T308	0,12	**0,24**	0,35	0,8	**2,4**	4,0						
DC.. 11T312												
RC.. 0602MO												
RC.. 0803MO												
RC.. 1003MO												
RC.. 1204MO												
RC.. 1606MO												
RC.. 2006MO												
RC.. 2507MO												
SC.. 09T304	0,12	**0,24**	0,35	0,8	**2,4**	4,0						
SC.. 09T308	0,12	**0,26**	0,40	0,8	**2,8**	4,8						
SC.. 120408												
SC.. 120412												
TC.. 090204	0,06	**0,12**	0,18	0,4	**1,3**	2,2						
TC.. 110202												
TC.. 110204	0,06	**0,14**	0,22	0,4	**1,4**	2,4						
TC.. 110208												
TC.. 16T302												
TC.. 16T304												
TC.. 16T308	0,12	**0,24**	0,35	0,8	**2,6**	4,4						
TC.. 16T312												
TC.. 220408												
VC.. 1103005							0,02	**0,025**	0,04	0,1	**1,25**	2,5
VC.. 110301							0,02	**0,03**	0,05	0,1	**1,25**	2,5
VC.. 1103015							0,02	**0,04**	0,075	0,1	**1,25**	2,5
VC.. 110302							0,02	**0,075**	0,1	0,1	**1,25**	2,5
VC.. 110304							0,02	**0,15**	0,25	0,1	**1,25**	2,5
VC.. 110308												
VC.. 160402												
VC.. 160404	0,08	**0,14**	0,20	0,4	**1,7**	3,0						
VC.. 160408	0,12	**0,21**	0,30	0,8	**2,1**	3,4						
VC.. 160412												
VC.. 220530												
WC.. 020102												
WC.. 020104												

Sharp ◄——————————————————————► stable

Information on the cutting data of chip breakers not included in this overview, can be found on → **Page 211–217**

9

Diamond as a cutting material

Ensures

- ▲ optimal surface quality
- ▲ burr-free workpieces
- ▲ high service lives
- ▲ lowest cutting forces
- ▲ high Process Security

Complete programme of roughing, finishing and Trailing edge inserts for machining aluminium, non ferrous metals, plastics, ...

The cutting materials

	CTD CD10 (CVD)	CTD PD20 (PKD)	CTD PU20 (PKD)	CTD PS30 (PKD)
	Fine grain Size (N10)	Fine grain grade (N20)	Coarse grain grade (N20)	Coarse grain Size (N30)
Properties	▲ perfect sharp edges ▲ no cutting pressure ▲ very close tolerances ▲ highest abrasion resistance with highest toughness ▲ very high heat conductivity	▲ high sharpness ▲ lower cutting pressure than PDC-S ▲ close tolerance ▲ lower abrasion resistance with increased toughness	▲ very sharp cutting edge ▲ reduced cutting pressure ▲ tight tolerances ▲ very high level of wear resistance and toughness	▲ high sharpness ▲ lower cutting pressure ▲ close tolerance ▲ lower abrasion resistance than with the PDC, with increased toughness
Material	suitable for superfinishing and semi-finishing of all non ferrous metals and NE-composite materials with small to high levels of abrasiveness	suitable for fine machining of all NE-materials with low abrasiveness	suitable for finishing to roughing non-ferrous metals and non-ferrous materials with highly abrasive alloying element. High chip removal on fibre-reinforced plastics such as CFRP and GFRP.	suitable for fine machining of all NE-materials and non-ferrous metals with low to very high levels of abrasiveness

Cutting Geometries

Neutral rake angle:

- ▲ higher cuting force
- ▲ higher temperature
- ▲ improved surface quality
- ▲ for stable workpieces



Positive rake angle: 5° / 7°

- ▲ lower cutting force
- ▲ lower temperature
- ▲ reduction in surface quality
- ▲ for unstable workpieces
- ▲ improved accuracy



CB chip breaker geometries:

- ▲ reliable chip control
- ▲ ideal for low-alloy aluminium
- ▲ For F | M | R applications



Notes on diamond usage

- ▲ Coolant is not generally needed, however it facilitates chip removal
- ▲ Note the chemical reaction to carbide-forming elements (PCD)
- ▲ Note the thermal interaction and critical temperature:
  PCD: 600 °C, CVD: 700 °C
  Depending on the material, use cooling.

Standard chip breakers / application notes

Main application steel and cast iron, secondary application stainless steels

Negative

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-CF / -CF20 ▲ Fine finishing ▲ Sharp cutting edge for low cutting forces ▲ Good chip control even at small depths of cut	**CTEP110 / TCM10** CTEP110 / TCM10 CTEP110 / TCM10			0,30–1,50	0,07–0,25	CN.. DN.. TN.. WN..
-F40 ▲ Fine turning chip breaker for machining steels ▲ Good chip control ▲ Ideal for copy turning work	**CTCP125-P** CTCP125-P	**CTCP125-P** CTCP125-P		0,50–2,00	0,10–0,30	VN..
-F50 ▲ Fine turning chip breaker for fine machining ▲ Steel and stainless steels ▲ Excellent chip control ▲ High surface quality	CTCP115-P / CTCP125-P	CTCP115-P / CTCP125-P / CTCP135-P CTCP135-P	**CTCP135-P** CTCP135-P	0,10–2,60	0,06–0,35	CN.. DN.. SN.. TN.. VN.. WN..
-TFQ ▲ Wiper geometry ▲ Finishing to medium machining ▲ Very high feeds ▲ High surface quality	**CTEP110 / CTCP115-P** CTEP110 CTEP110 / CTCP115-P	CTCP115-P / CTCP125-P CTCP115-P / CTCP125-P		0,50–5,00	0,10–0,60	CN.. DN.. WN..
-XU ▲ Finishing to light roughing ▲ Universal chip breaker ▲ Copy turning ▲ Excellent chip formation ▲ Low cutting forces	CTCP115-P / CTCP125-P CTCP115-P	CTCP115-P / CTCP125-P CTCP115-P / CTCP125-P	CTCP125-P	0,40–4,50	0,12–0,40	CN.. DN.. VN.. WN..

9

Standard chip breakers / application notes

Main application steel and cast iron, secondary application stainless steels

Negative

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-M40 ▲ Stable geometry ▲ Medium feed rates ▲ Can be used for any application ▲ Good chip control	 **M**	**CTCP125-P** CTCP125-P	**CTCP125-P** CTCP125-P	 0,50–3,00	0,10–0,35	VN..
-M50 ▲ Medium machining ▲ First choice for steel machining ▲ Universal application ▲ Wide range of applications	 **M**	**CTCP115-P / CTCP125-P / CTCK110 / CTCK120** CTCP115-P CTCP115-P / CTCP125-P / **CTCK110 / CTCK120**	CTCP115-P / **CTCP125-P** CTCP125-P CTCP115-P / CTCP125-P / **CTCK110 / CTCK120**	CTCP125-P / **CTCP135-P** CTCP135-P CTCP125-P / **CTCK120**	 0,50–5,00	0,12–0,40	CN.. DN.. SN.. TN.. VN.. WN..
-TMQ ▲ Wiper geometry ▲ Light to medium rough machining ▲ Very high feeds ▲ High surface quality	 **M**	**CTCP115-P** CTCP125-P CTCP125-P	**CTCP125-P** CTCP125-P CTCP125-P	 0,80–6,00	0,20–0,85	CN.. DN.. WN..
-M70 ▲ Light to medium rough machining ▲ Cast crust and forging skin ▲ Stable cutting edge ▲ Interrupted cut ▲ Raw materials and forgings	 **M** **R**	**CTCK110 / CTCK120 / CTCP115-P** CTCP115-P **CTCK110 / CTCK120** / CTCP115-P / CTCP125-P	CTCP115-P / **CTCP125-P** CTCP125-P **CTCK120** / CTCP125-P	**CTCP125-P / CTCP135-P** CTCP135-P CTCP125-P / **CTCK120**	 1,50–4,50	0,20–0,80	CN.. DN.. SN.. TN.. WN..
-NMA ▲ Rough machining ▲ Stable cutting edge ▲ For short-chipping materials ▲ First choice for grey cast iron	 **R**	**CTCK110**	**CTCK110 / CTCK120**	**CTCK120**	 1,50–4,50	0,20–0,80	CN.. DN.. SN.. TN.. WN..
-R28 ▲ Single sided roughing geometry ▲ Longitudinal, face and copy turning ▲ Varying depths of cut ▲ Steels with low tensile strength (800 N / mm²) ▲ Good chip control	 **R**	**CTCP115-P** / CTCP125-P CTCP115-P / CTCP125-P CTCP115-P	**CTCP115-P / CTCP125-P / CTCP135-P** CTCP125-P / CTCP135-P CTCP125-P	**CTCP135-P** CTCP135-P CTCP135-P	 1,00–12,00	0,25–0,80	CN.. DN.. SN..

Standard chip breakers / application notes

Negative

Model	Smooth cut ○	Irregular cutting depth ○	Interrupted cut ○	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
Main application steel and cast iron, secondary application stainless steels						
-R58 ▲ Single sided roughing geometry ▲ Longitudinal and face turning ▲ Light interrupted cut ▲ Low cutting forces ▲ Unstable machines						
R	**CTCP115-P / CTCP125-P**	**CTCP115-P / CTCP125-P / CTCP135-P**	**CTCP135-P**			CN.. DN.. SN.. TN..
	CTCP115-P / CTCP125-P	CTCP125-P / CTCP135-P	CTCP135-P			
	CTCP115-P	CTCP115-P / CTCP125-P	CTCP125-P			
				1,50–12,00	0,30–1,20	
-R88 ▲ Single sided roughing geometry ▲ Longitudinal and face turning ▲ High feedrate ▲ Large depths of cut ▲ Heavily interrupted cut						
R	**CTCP115-P / CTCP125-P**	**CTCP115-P / CTCP125-P / CTCP135-P**	**CTCP135-P**			SN..
	CTCP115-P / CTCP125-P	CTCP115-P / CTCP125-P	CTCP135-P			
	CTCP115-P	CTCP115-P / CTCP125-P	CTCP125-P			
				3,50–16,00	0,50–1,50	

Negative

Model	Smooth cut ○	Irregular cutting depth ○	Interrupted cut ○	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
Main application stainless steels, secondary application steel and super alloys						
-F30 ▲ Finishing of stainless steels ▲ Continous cut ▲ High surface quality ▲ Good swarf control						
F	CTCM120 / CTPM125	CTCM120 / CTPM125 / CTCM130	CTCM130			CN.. DN.. SN.. TN.. VN.. WN..
	CTCM120 / CTPM125	**CTCM120 / CTPM125 / CTCM130**	**CTCM130**			
				0,08–2,5	0,10–0,35	
-M30 ▲ Option for stainless steel machining ▲ Good swarf control ▲ Little edg build up ▲ Low cutting forces ▲ Little built-up edge ▲ Applicable on unstable machines						
F M	CTCM120 / CTPM125	CTCM120 / CTPM125 / CTCM130	CTCM130			CN.. DN.. SN.. TN.. VN.. WN..
	CTCM120 / CTPM125	**CTCM120 / CTPM125 / CTCM130**	**CTCM130**			
				1,00-4,50	0,15-0,40	
-42 ▲ Extremely soft-cutting chip breaker ▲ For small and medium widths of cut ▲ Suitable for thin-walled parts						
M			CTCM130			CN..
			CTCM130			
			CTCM130			
				0,50–4,50	0,05–0,35	
-M42 ▲ For medium machining on stainless steels ▲ As a secondary application for general steels and super alloys						
M			CTCM130			DN.. SN.. TN.. WN..
			CTCM130			
			CTCM130			
				1,00–3,50	0,15–0,40	

9

Standard chip breakers / application notes

Negative

Main application super alloys, secondary application stainless steels

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-M60 ▲ Light to medium roughing ▲ Stable cutting edge ▲ Interrupted cut ▲ Forged skin and cast crust	CTCM120 / CTPM125 **CTCM120 / CTPM125**	CTCM120 / CTPM125 / CTCM130 **CTCM120 / CTPM125 / CTCM130**	CTCM130 **CTCM130**	1,50–6,00	0,25–0,50	CN.. DN.. SN.. TN.. WN..
M **R**						
-F34 ▲ Stable, positive cutting edge ▲ Also for slightly interrupted cuts	CTPX710 **CTPX710**	CTPX710 **CTPX710**		0,50–2,50	0,08–0,25	CN.. WN..
F	CTPX710 **CTPX710**	CTPX710 **CTPX710**				
-M34 ▲ First choice for superalloys ▲ Light cutting geometry ▲ Little built-up edge ▲ Low cutting forces	**CTPX710** **CTPX710**	**CTPX710** **CTPX710**		0,80–3,0	0,10–0,30	CN.. DN.. SN.. VN.. WN..
M	CTPX710 **CTPX710**	CTPX710 **CTPX710**				
-M42 ▲ For medium machining on stainless steels ▲ As a secondary application for general steels and super alloys	**CTCM130**	**CTCM130**	**CTCM130**	1,0–3,50	0,15–0,40	CN.. DN..
M	**CTPX710**	**CTPX710**				

Positive

Main application steel and cast iron, secondary application stainless steels and super alloys

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-CF05 ▲ Fine finishing ▲ For all common steel materials, stainless steels and GGG ▲ Good swarf control ▲ High surface quality	**CTEP110 / TCM407** CTEP110	TCM10 / TCM407		0,20–1,30	0,06–0,25	CC.. DC.. SC.. TC.. VC..
F	CTEP110	TCM10 / TCM407				
-SF ▲ Finishing / contour turning ▲ Good swarf control ▲ High surface quality ▲ Low cutting forces	**CTCP115-P**	**CTCP125-P**	CTCP125-P / CTCP135-P CTCP125-P	0,05–2,50	0,05–0,25	CC.. DC.. SC.. TC.. VC.. WC..
F		CTCP125-P				
-CF55 ▲ Finishing to medium machining ▲ Suitable for general and stainless steels ▲ Low cutting forces ▲ Good swarf control ▲ High surface quality	**CTEP110** CTEP110	**TCM10** / CTEP110 CTEP110		0,20–1,30	0,06–0,25	CC.. DC.. SC.. TC.. VC..
F **M**	CTEP110	CTEP110				

Standard chip breakers / application notes

Positive

Main application steel and cast iron, secondary application stainless steels and super alloys

Model	Smooth cut ○	Irregular cutting depth ○	Interrupted cut ○	Sectional illustration	a_p mm	f mm	Geometry
-SMF ▲ Finishing to medium machining ▲ Low cutting forces ▲ Good swarf control ▲ High surface quality	**CTEP110 / CTCP115-P** CTEP110 CTEP110	**TCM10 / CTCP125-P / CTCP115-P** CTCP135-P	**CTCP135-P** CTCP135-P		0,20–1,30	0,06–0,25	CC.. DC.. SC.. TC.. VC..
-M23 ▲ Soft cutting geometry with outstanding chip breaking behaviour at low cutting depths in finish machining	**CTCP115-P / CTCP125-P** CTCP115-P / CTCP125-P	**CTCP125-P** CTCP125-P	**CTCP125-P** CTCP125-P		0,30–4,0	1,0–0,45	RC..
-SM ▲ Medium machining ▲ Universal application ▲ Stable cutting edge ▲ Varying depths of cut ▲ Wide range of applications	**CTCP115-P / CTCP125-P** CTCP115-P / **CTCK110 / CTCK120**	**CTCP125-P / CTCP135-P / CTCP115-P** CTCP135-P CTCP125-P / **CTCK110 / CTCK120**	**CTCP125-P / CTCP135-P** CTCP135-P CTCK120		0,05–5,00	0,15–0,45	CC.. DC.. RC.. SC.. TC.. VC..
-SMQ ▲ Positive wiper geometry ▲ Finishing to medium machining ▲ Very high feeds ▲ High surface quality	**CTCP115-P** CTCP125-P / CTCP115-P	**CTCP125-P** CTCP125-P	**CTCP125-P** CTCP125-P		1,00–4,00	0,15–0,45	CC.. DC..

Positive

Model	Smooth cut ○	Irregular cutting depth ○	Interrupted cut ○	Sectional illustration	a_p mm	f mm	Geometry
-F43 ▲ For the light to medium machining of all stainless steels, general steels and superalloys			CTCM130 **CTCM130** CTCM130		0,50–2,50	0,05–0,25	CC.. DC.. TC..
-M25 ▲ First choice for medium machining of stainless steels ▲ High surface quality ▲ Little built-up edge	CTCM120 / CTPM125 **CTCM120 / CTPM125**	CTCM120 / CTPM125 / CTCM130 **CTCM120 / CTPM125 / CTCM130**	CTCM130 **CTCM130**		0,40–3,20	0,10–0,30	CC.. DC.. TC.. VC..
-M55 ▲ First choice for medium machining to roughing of stainless steels ▲ Smooth to lightly interrupted cut ▲ Good swarf control ▲ Stable cutting edge	CTCM120 / CTPM125 **CTCM120 / CTPM125**	CTCM120 / CTPM125 / CTCM130 **CTCM120 / CTPM125 / CTCM130**	CTCM130 **CTCM130**		0,40–4,80	0,06–0,35	CC.. DC.. SC.. TC.. VC..

9

Standard chip breakers / application notes

Positive

Main application non-ferrous metals, secondary application stainless steels, steels, super alloys, cast iron

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-23P ▲ Low adhesion ▲ Good chip control with soft aluminium alloys						
	H216T	H216T				CC.. DC..
	H216T	**H216T**	**H216T**			
F	H216T	H216T	H216T	0,2–4,0	0,05–0,3	
-25P ▲ Sharp cutting edge ▲ Good swarf control on soft aluminium alloys ▲ Low adhesion	**CTPX710**	CTPX710				
	CTPX710	CTPX710				CC.. DC.. SC.. VC..
	CTPX710 / H216T	**CTPX710 / H216T**	**CTPX710 / H216T**			
F **M**	**CTPX710**	CTPX710		0,50–4,50	0,05–0,60	
	CTPX710	CTPX710				
-25Q ▲ Wiper geometry ▲ High feeds ▲ High surface quality ▲ Good chip control with softer aluminium alloys ▲ Low adhesion	**CTPX710**	CTPX710				
	**CTPX710**	CTPX710				CC.. DC.. VC..
	H210T	H210T				
	H210T / CTPX710	**H210T / CTPX710**	**H210T / CTPX710**			
M	H210T / **CTPX710**	H210T / CTPX710		0,05–6,50	0,05–0,60	
	H210T	H210T	H210T			
-27 ▲ The universal Alu geometry ▲ Sharp cutting edge ▲ Extremely positive rake angle ▲ Low adhesion ▲ High feed rates	**CTPX715**	CTPX715				
	**CTPX715**	CTPX715				CC.. DC.. RC.. SC.. TC.. VC..
	CTPX715 / H216T	CTPX715 / H216T				
	CTPX715 / H216T	**CTPX715 / H216T**	**CTPX715 / H216T**			
M **R**	**CTPX715**	CTPX715		1,00–10,00	0,10–0,75	
	CTPX715 / H216T	CTPX715 / H216T	CTPX715 / H216T			
-29 ▲ Direct sintered aluminium geometry ▲ Positive rake angle ▲ Good chip control ▲ For medium to rough machining	CTPX710	CTPX710				
	CTPX710	CTPX710				CC.. DC.. VC..
	CTPX710	**CTPX710**				
	H216T	**H216T**	**H216T**			
M **R**	CTPX710	CTPX710		1,00–6,00	0,25–0,60	

Positive

Main application super alloys and stainless steels, secondary application steels and non-ferrous metals

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-F05 ▲ Maximum tolerance class ▲ Outstanding chip control, even with the smallest cutting depths ▲ Very low cutting forces	**CTPX710**	CTPX710				
	**CTPX710**	CTPX710				DC.. VC..
	CTPX710	CTPX710				
	CTPX710	**CTPX710**				
	CTPX710	**CTPX710**				
F	CTPX710	CTPX710		0,10–2,50	0,02–0,25	

Supplementary chip breakers / application notes

	Model	Smooth cut	Irregular cutting depth	Interrupted cut
-EN ▲ Universal chip breaker for general steels	 M	**CTCP115-P** CTCP125-P **CTCK110**	**CTCP125-P** CTCP135-P **CTCK120**	**CTCP135-P** CTCP135-P CTCP125-P
-ER | -EL ▲ A problem solver for unstable conditions ▲ Can be used on less powerful machines ▲ Can be used for general steels and on stainless materials as a secondary application	 M		**CTCP125-P**	**CTCP135-P**

Clamping systems

MaxiLock D



- Clamping element
- Inserts
- Insert seat
- Pin
- Screw

The first-choice tool for machining with negative centre-hole inserts. Secure and precise positioning of the indexable insert thanks to the double clamping effect of the clamping element.

MaxiLock N



- Clamping element
- Inserts
- Insert seat
- Shim
- Lever

This clamping system is suitable for all centre-hole inserts with a negative basic shape. The clamping screw is easy to access from the top and bottom of the holder. When the clamping system is released, there are no loose spare parts.

MaxiLock S



- Clamping element
- Inserts
- Insert seat
- Threaded sleeve

The positive screw clamping guarantees a secure connection between the indexable insert and the tool holder. The chip flow is not disrupted by protruding clamping elements. Thanks to the neutral insert position, the effective available rake angle is identical to the rake angle of the indexable insert.

Trailing edge geometry – information

High-quality surfaces can be produced inexpensively using indexable inserts with wiper geometry (-TFQ; -TMQ; -SMQ; -25Q).

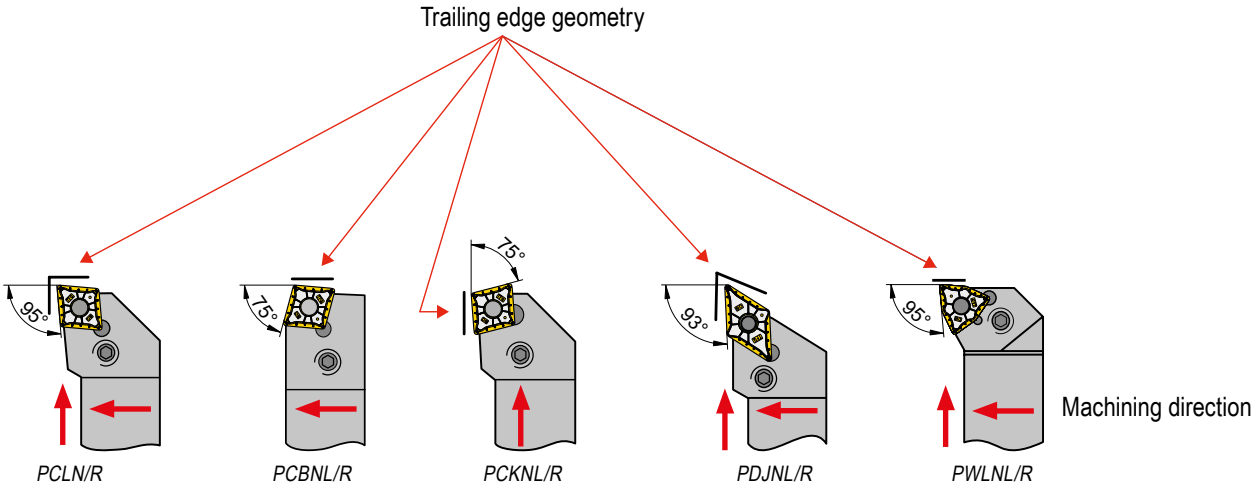

All turning inserts with trailing edge are clamped in standard ISO tool holders



Check toolholder:

- ▲ Insert seat
- ▲ Shim
- ▲ Clamping Lever

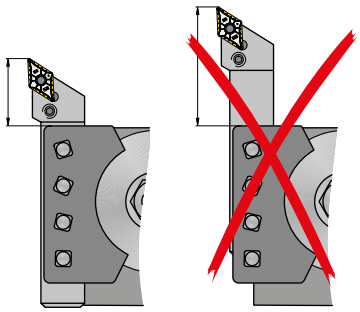

Short tool overhang



Ensure correct tool alignment

Feed rate guide values for surface finish quality

Roughness range R_z in µm	R_{th}	Corresponds to R_a	Roughness index	ISO 1302	Corner radius r_ε in mm and feed rate f in mm/rev.						
					RE = 0,1	RE = 0,2	RE = 0,4	RE = 0,8	RE = 1,2	RE = 1,6	RE = 2,4
63–100	$R_{th}63$	12,5–25	N11	25	0,22*	0,32*	0,45*	0,63	0,78	0,9	1,1
40–63	$R_{th}40$	6,3–12,5	N10	12,5	0,18*	0,25*	0,36	0,51	0,62	0,72	0,88
31,5–40	$R_{th}31,5$	4,9–6,3	N9	6,3	0,16*	0,22*	0,32	0,45	0,55	0,63	0,78
25–31,5	$R_{th}25$	4,0–4,9			0,14*	0,2*	0,28	0,4	0,49	0,57	0,69
16–25	$R_{th}16$	2,5–4,0	N8	3,2	0,11*	0,16	0,23	0,32	0,39	0,45	0,55
10–16	$R_{th}10$	1,6–2,5			0,09	0,13	0,18	0,25	0,31	0,36	0,44
6,3–10	$R_{th}6,3$	1,0–1,6	N7	1,6	0,07	0,1	0,14	0,2	0,25	0,28	0,35
4–6,3	$R_{th}4$	0,8–1,0	N6	0,8	0,06	0,08	0,11	0,16	0,2	0,23	0,28
2,5–4	$R_{th}2,5$	0,4–0,8	N5	0,4	0,04	0,06	0,09	0,13	0,15	0,18	0,22
1,6–2,5	$R_{th}1,6$	0,2–0,4	N4	0,2	0,04	0,05	0,07	0,1	0,12	0,14	0,18
1–1,6	$R_{th}1$	0,1–0,2	N3	0,1	0,03	0,04	0,06	0,08	0,1	0,11	0,14

*Please ensure that the feed rate values used do not exceed the corner radius (RE).

Trailing edge geometry – operating principle

Relationship of feed rate to surface roughness

Improved Surface Quality

Given identical feed rates, the indexable insert with wiper geometry attains an R_t value that is many times better than a conventional indexable insert.

Shorter machining time

If the same R_t value is achieved as with a standard indexable insert, the indexable insert with the wiper geometry can be moved at twice the feed speed **(= lower cycle times!)**

Theoretical Surface Quality

The maximum theoretical surface roughness with turning $Rt_{theor.}$ is the combination of feed rate and corner radius:

$$Rt_{theor.} = \left(r_\varepsilon - \sqrt{r_\varepsilon^2 - \frac{f^2}{4}}\right) \cdot 1000$$

or approximately:

$$Rt_{theor.} = \frac{125 \cdot f^2}{r\varepsilon} \quad [\mu m]$$

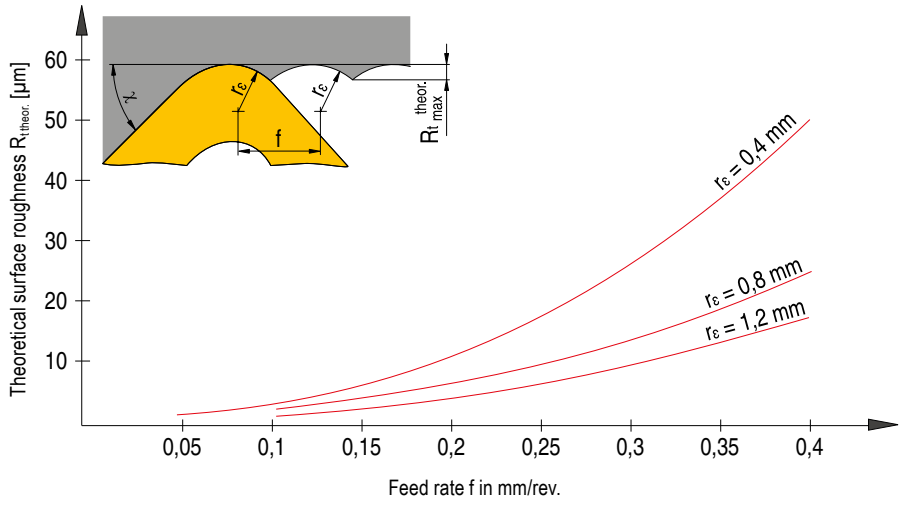

9

ISO designation system for inserts

Indexable inserts – metric

C	N	M	G	12	04	08	E	N	-	M50
1	2	3	4	5	6	7	8	9		13

Indexable inserts – inch

C	N	M	G	4	3	2	E	N	-	M50
1	2	3	4	5	6	7	8	9		13

Indexable inserts, CBN, ceramic – metric

C	N	G	A	12	04	08	S	N	-	020D	_	B	3	-	Q
1	2	3	4	5	6	7	8	9		10		11	12		13

Indexable inserts, CBN, ceramic – inch

C	N	G	A	4	3	2	S	N	-	020D	_	B	3	-	Q
1	2	3	4	5	6	7	8	9		10		11	12		13

1 Insert shape

V	35°	Included angle
D	55°	
E	75°	
C	80°	
M	86°	
K	55°	Included angle
B	82°	
A	85°	
L	90°	Other shapes
P	108°	
H	120°	
O	135°	
R	-	
S	90°	
T	60°	
W	80°	

2 Clearance angle

	α		α
A	3°	F	25°
B	5°	G	30°
C	7°	N	0°
D	15°	P	11°
E	20°		
O	Clearance angles not included within the standard for which particular information is necessary.		

3 Tolerances



	IC±		BS		S	
	mm	inch	mm	inch	mm	inch
A	0,025	.0010	0,005	.0002	0,025	.001
F	0,013	.0005	0,005	.0002	0,025	.001
C	0,025	.0010	0,013	.0005	0,025	.001
H	0,013	.0005	0,013	.0005	0,025	.001
E	0,025	.0010	0,025	.0010	0,025	.001
G	0,025	.0010	0,025	.0010	0,13	.005
J	0,05-0,15*	.002-.006*	0,005	.0002	0,025	.001
K	0,05-0,15*	.002-.006*	0,013	.0005	0,025	.001
L	0,05-0,15*	.002-.006*	0,025	.0010	0,025	.001
M	0,05-0,15*	.002-.006*	0,05-0,20*	.003-.008*	0,13	.005
N	0,05-0,15*	.002-.006*	0,05-0,20*	.003-.008*	0,025	.001
U	0,08-0,25*	.003-.010*	0,13-0,38*	.005-.015*	0,13	.005

* Depends on insert size

6 Insert thickness



		Code	
mm	inch	mm	inch
1,59	1/16	01	1
2,38	3/32	02	1.5
3,18	1/8	03	2
3,97	5/32	T3	2.5
4,76	3/16	04	3
5,56	7/32	05	3.5
6,35	1/4	06	4
7,94	5/16	07	5
9,52	3/8	09	6

7 Corner radius

		Code		RN 00 RC MO
mm	inch	mm	inch	
≤ 0,05	.0015	00	X0	
0,1	.004	01	0	
0,2	.008	02	.5	
0,4	1/64	04	1	
0,8	1/32	08	2	
1,2	3/64	12	3	
1,6	1/16	16	4	
2,0	5/64	20	5	
2,4	3/32	24	6	
2,8	7/64	28	7	
3,2	1/8	32	8	

8 Cutting edge

F	Sharp
E	rounded
T	chamfered
S	Chamfered and honed
K	Double-chamfered
P	Double-chamfered and honed
R	Round chamfer

9 Direction of cut

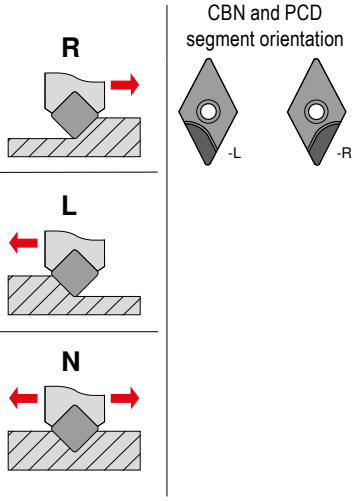



4 Characteristics

N	
R	
F	
A	
M, P	
G, P	
W	
T	
Q	
U	
B	
H	
C	
J	
X	Special version

inch
Change at inscribed circle
IK < 1/4"

IK > 1/4"	IK < 1/4"
N / R / F	E
A / M / G	D
X	X

5 Cutting length

Type	ISO	ANSI	L mm	L inch	IC mm	IC inch
C	06	2	6,4	.250	6,35	.250
	09	3	9,7	.382	9,525	.375
	12	4	12,9	.508	12,70	.500
	16	5	16,1	.634	15,875	.625
	19	6	19,3	.760	19,05	.750
	25	8	25,8	1.016	25,4	1.000
	32	12	35,24	1.269	31,75	1.250
S	06	2	6,35	.250	6,35	.250
	09	3	9,525	.375	9,525	.375
	12	4	12,7	.500	12,7	.500
	15	5	15,875	.625	15,875	.625
	19	6	19,05	.750	19,05	.750
	25	8	25,4	1.000	25,4	1.000
	31	10	31,75	1.250	31,75	1.250
D	07	2	7,7	.303	6,35	.250
	11	3	11,6	.457	9,525	.375
	15	4	15,5	.610	12,70	.500
V	11	2	11,1	.437	6,35	.250
	16	3	16,6	.653	9,525	.375
	22	4	22,10	.870	12,70	.500

Type	ISO	ANSI	L mm	L inch	IC mm	IC inch
T	06	1.2	6,9	.272	3,97	.156
	09	1.8	9,6	.378	5,56	.219
	11	2	11,0	.433	6,35	.250
	16	3	16,5	.650	9,525	.375
	22	4	22,	.079	12,70	.039
	27	5	27,5	1.083	15,875	.625
	33	6	33,0	1.299	19,05	.750
W	06	3	6,5	.256	9,525	.375
	08	4	8,7	.331	12,70	.039
	10	5	10,9	.429	15,875	.625
R	06	2	6,35	.250	6,35	.250
	08	-	8,0	.315	8,0	.315
	09	3	9,52	.375	9,52	.375
	10	-	10,0	.394	10,0	.394
	12*	-	12,0	.472	12,0	.472
	12	4	12,7	.488	12,70	.488
	15	5	15,875	.625	15,875	.625
	16	-	16,0	.630	16,0	.630
	19	6	19,05	.750	19,05	.750
	25	8	25,0	.984	25,0	.984
	25*	-	25,4	1.000	25,4	1.000
	31	10	31,75	1.250	31,75	1.250
	32	-	32,0	1.260	32,0	1.260

* inch version

10 Chamfer type

	mm	inch		
015	0,15	.006	A	05°
020	0,20	.008	B	10°
025	0,25	.010	C	15°
050	0,50	.020	D	20°
075	0,75	.030	E	25°
100	1,00	.040	F	30°
			G	35°

1) Two letters are assigned for double-chamfered cutting edges
e.g. BE =
chamfer angle 1 (y_1) = 10°
chamfer angle 2 (y_2) = 25°

11 Number of cutting edges

Single sided		Complete insert thickness	
A		T	
B		U	
C		V	
D		W	
G		X	
H		Y	

Double sided		Entire clamping flat	
K		S	
L		F	
M		E	
N			
P			
Q			

12 Segment length



Approx. specification in mm

13 Chip breaker designation

You can find a comprehensive chip breaker overview on
→ **page 211–217**

9

ISO designation system for tool holders

	P	C	L	N	R	20	20	K	12	-	T
	1	2	3	4	5	6	7	8	9		10
UT50	-	P	C	L	N	R			-12		
0		1	2	3	4	5	6	7	8	9	10
HSK-T63	-	D	C	L	N	R			-12		
0		1	2	3	4	5	6	7	8	9	10

0 System/size

UT = UTS
according to ISO 26622
UT40 = UTS 40 mm
UT50 = UTS 50 mm
UT63 = UTS 63 mm

HSK-T
according to ISO 12164
HSK-T63 = 63 mm
HSK-T100 = 100 mm

1 Tool holder

D  Retained from above and via bore	**S**  Retained via centre screw
M  Retained from above and via bore	**P**  Retained via the bore
C  Retained from above	**X** Special version

2 Insert shape

V	35°	Included angle	
D	55°		
E	75°		
C	80°		
M	86°		
K	55°	Included angle	
B	82°		
A	85°		
L	90°		Other shapes
P	108°		
H	120°		
O	135°		
R	-		
S	90°		
T	60°		
W	80°		

6 Shank height



7 Shank width



8 Tool length

OAL mm	OAL inch		OAL mm	OAL inch	
32	4.000	**A**	160	4.500	**N**
40	4.500	**B**	170	5.500	**P**
50	5.000	**C**	180	–	**Q**
60	6.000	**D**	200	6.000	**R**
70	7.000	**E**	250	7.000	**S**
80	8.000	**F**	300	8.000	**T**
90	5.500	**G**	350	5.500	**U**
100	5.625	**H**	400	3.500	**V**
110	5.300	**J**	450	3.500	**W**
125	14.000	**K**	500	3.750	**Y**
140	6.800	**L**	Special version		**X**
150	4.400	**M**			



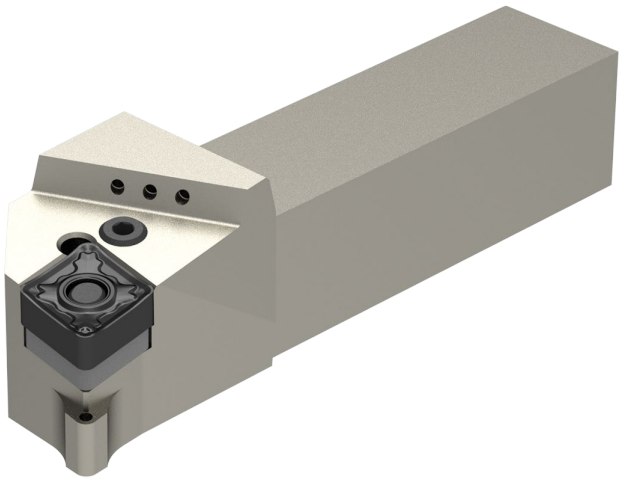

3

Style

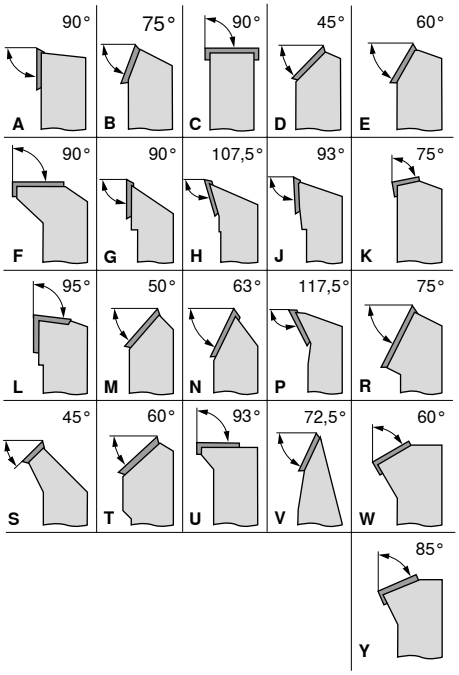

4

Clearance angle



	α		α
A	3°	F	25°
B	5°	G	30°
C	7°	N	0°
D	15°	P	11°
E	20°		
O	Clearance angles not included within the standard for which particular information is necessary.		

5

Direction of cut

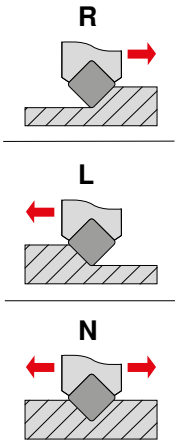

9

Cutting length

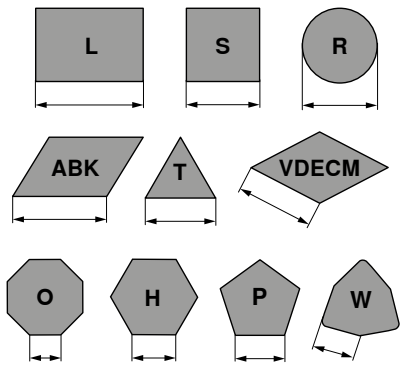

10

Manufacturer specification

T = Toggle
Special length (mm)
Insert thickness (deviating from standard)
Special version (X..)
Machine manufacturer (specific)
DC = DirectCooling

ISO designation system for boring bars

		A	25	R		P	C	L	N	R	12	
		1	2	3		4	5	6	7	8	9	10
UT40	-		25	G	-	P	C	L	N	R	- 12	
0		1	2	3		4	5	6	7	8	9	10
HSK-T63	-		50	Q	-	D	C	L	N	R	- 12	
0		1	2	3		4	5	6	7	8	9	10

0 System/size

UT = UTS
according to ISO 26622
UT40 = UTS 40 mm
UT50 = UTS 50 mm
UT63 = UTS 63 mm

HSK-T
according to ISO 12164
HSK-T63 = 63 mm
HSK-T100 = 100 mm

1 Shank type

S	Steel shank	**E**	As C with coolant hole
A	Steel shank with coolant hole	**F**	As C with antivibration system
B	Steel shank with antivibration system	**G**	As C with coolant hole and antivibration system
D	Steel shank with coolant hole and antivibration system	**H**	Heavy metal
C	Carbide shank with steel head	**J**	Heavy metal with coolant hole

5 Insert shape

V	35°	Included angle	
D	55°		
E	75°		
C	80°		
M	86°		
K	55°	Included angle	
B	82°		
A	85°		
L	90°	Other shapes	
P	108°		
H	120°		
O	135°		
R	-		
S	90°		
T	60°		
W	80°		

6 Style

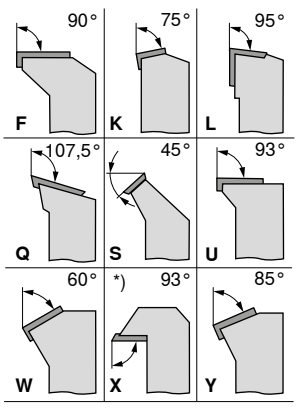

*) CERATIZIT factory standard

7 Clearance angle



	α		α
A	3°	**F**	25°
B	5°	**G**	30°
C	7°	**N**	0°
D	15°	**P**	11°
E	20°		

O Clearance angles not included within the standard for which particular information is necessary.

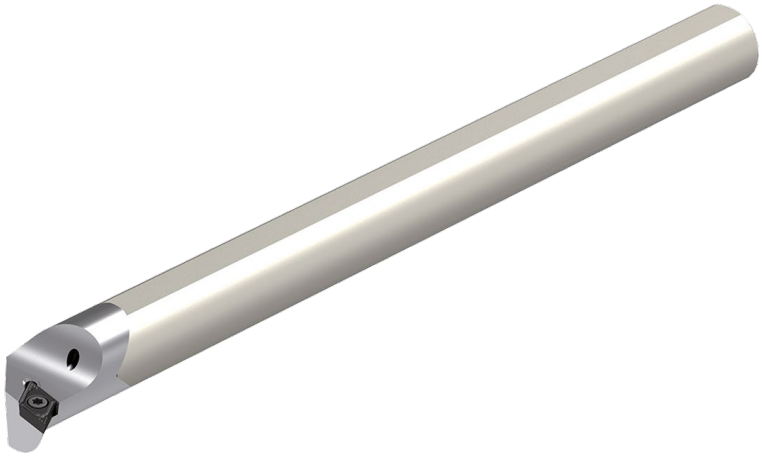

2

Shank type & size

DCONMS mm	DCONMS inch
08	A two-digit figure indicating the boring bar diameter in 1/16 of an inch.
10	
12	
16	
20	
25	
32	
40	
50	
60	



3

Tool length

OAL mm	OAL inch	
80	3	F
100	3,5	H
110	4	J
125	4,5	K
140	5	L
150	5,5	M
160	6	N
170	6,5	P
180	6,75	Q
200	7	R
250	8	S
300	10	T
350	12	U
400	14	V
450	16	W
500	18	Y
	20	
Special version		X



4

Clamping method

D  Retained from above and via bore	S  Retained via centre screw
M  Retained from above and via bore	P  Retained via the bore
C  Retained from above	X Special version

9

8

Direction of cut

R



L



9

Cutting length

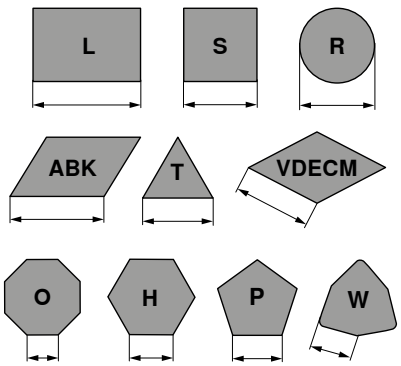

10

Manufacturer specification

T = Toggle
Special length (mm)
Insert thickness (deviating from standard)
Special version (X..)
Machine manufacturer (specific)

Types of wear

Wear on clearance face

Abrasion on flank: normal wear after a certain machining time

Cause
- Too high cutting speed
- Carbide grade with too low wear resistance
- Feed rate not adapted

Remedy
- Reduce cutting speed
- Use grade with higher wear resistance
- Adapt feed rate to cutting speed and cutting depth

Edge chipping

Through excessive mechanical stress at the cutting edge fracture and chipping can occur.

Cause
- Grade with too high wear resistance
- Vibration
- Too high cutting speed and / or feed rate
- Interrupted cut
- Swarf damage

Remedy
- Use tougher grade
- Use negative cutting edge geometry with chip groove
- Improve stability (tool, work piece)

Cratering

The hot chip which is being evacuated causes cratering at the rake face of the cutting edge.

Cause
- Too high cutting speed and / or feed rate
- Rake angle too shallow
- Grade with insufficient wear resistance
- Insufficient coolant supply

Remedy
- Reduce cutting speed and / or feed rate
- Use grade with higher wear resistance
- Increase coolant quantity and / or pressure, optimise coolant supply
- Use grade which is more resistant to cratering

Plastic deformation

High machining temperature and simultaneous mechanical stress can lead to plastic deformation.

Cause
- Too high machining temperature resulting in softening of substrate
- Damage of coating
- Grade with insufficient wear resistance
- Insufficient coolant supply

Remedy
- Reduce cutting speed
- Use grade with higher wear resistance
- Provide cooling

Built-up edge



Built-up material / edges occur when the chip is not evacuated properly due to insufficient cutting temperature.

Cause
- Insufficient cutting speed
- Rake angle too shallow
- Wrong cutting material
- Lack of cooling / lubrication

Remedy
- Increase cutting speed
- Increase rake angle
- Apply TiN coating
- Use emulsion with higher concentration

Insert breakage

Excessive stress of the insert causes breakage.

Cause
- Excessive stress of cutting material
- Lack of stability
- Clearance angle too small

Remedy
- Use tougher grade
- Use protective edge chamfer
- Increase edge hone
- Use geometry with higher stability

Recommendation for Optimum Results

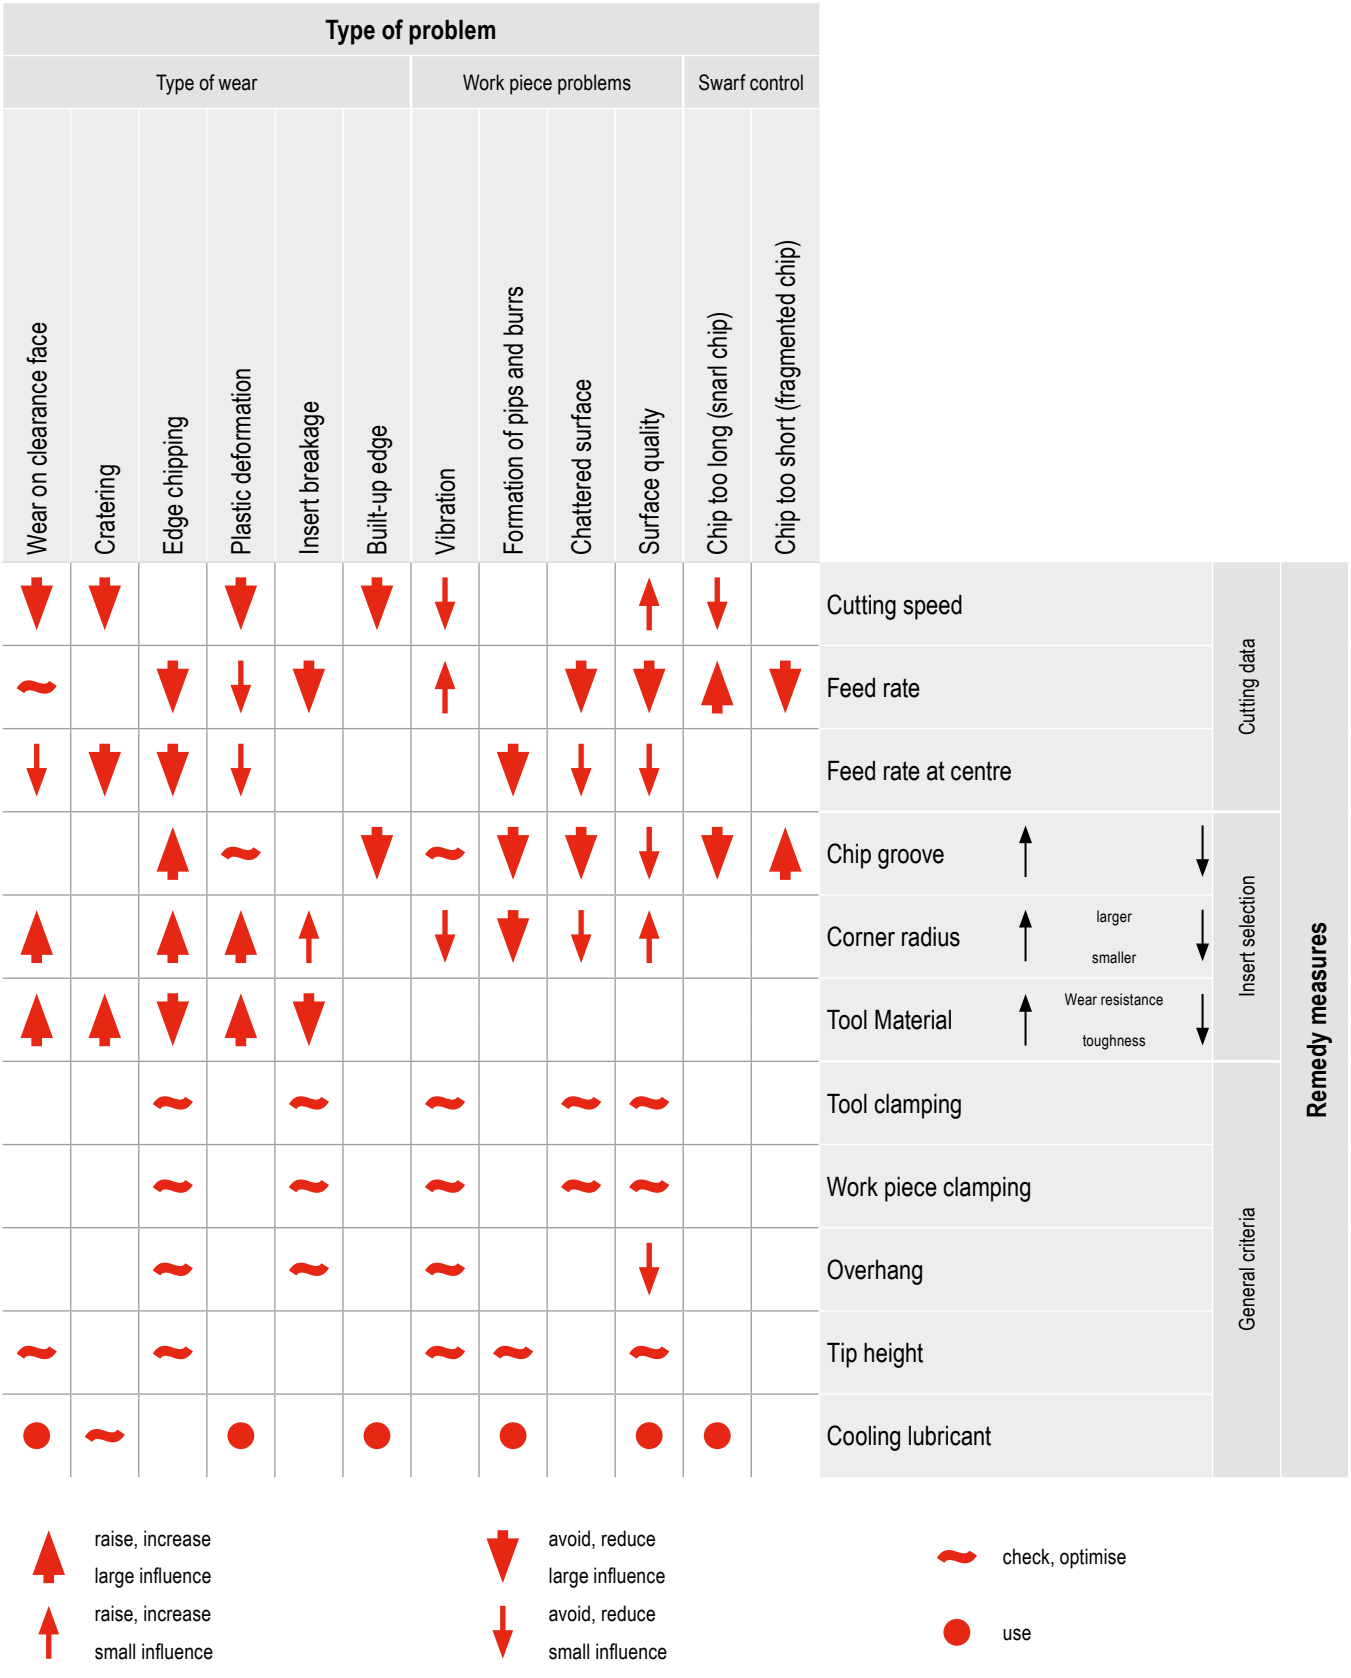

Grades Overview

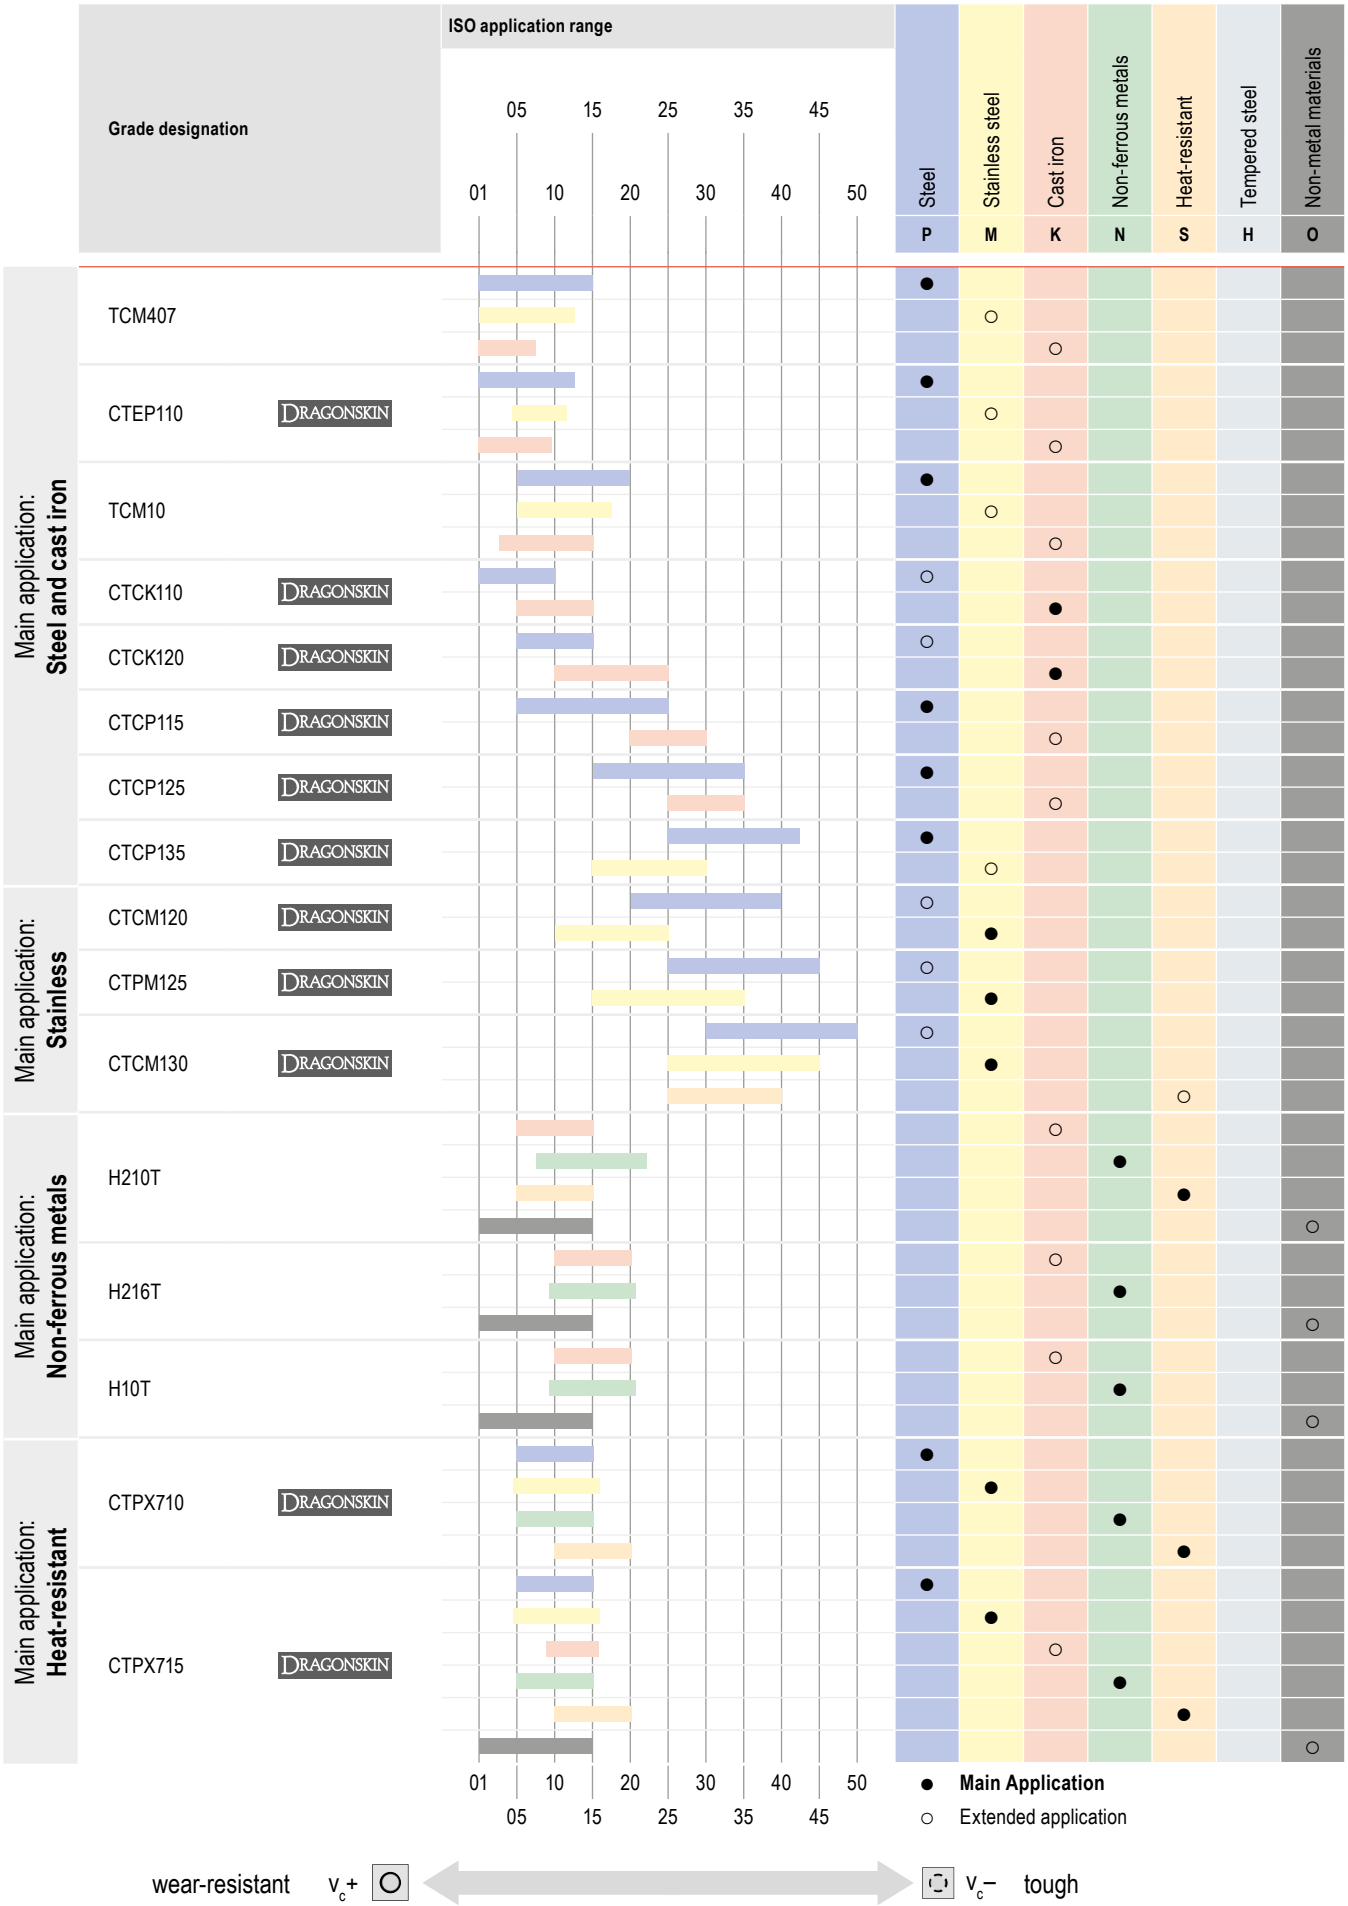

Grade description

TCM407

ISO | **P10** | M05 | K05

Specification:
Composition: Co 8.0%; WC 16.0%; TaNbC 10.0%; TiCN balance | Grain size: 2-3 µm | Hardness: HV30 1760

Usage recommendation:
The uncoated cermet grade for fine finishing steel materials.

CTEP110



ISO | **P10** | M10 | K05

Specification:
Composition: Co/Ni 12.2%; WC 15.0%; TaNbC 10.0%; TiCN balance | Grain size: 2-3 µm | Hardness: HV30 1650 | Layer system: CVD TiCN-Al2O3 Multilayer

Usage recommendation:
The cermet grade with toughness reserves for finish machining at high cutting speeds.

TCM10

P15 | K10

Specification:
Composition: Cermet Co/Ni 12,2%; WC 15,0%; TaNbC 10,0%; TiCN balance | Grain size: 2-3 µm | Hardness: HV_{30} 1650

Usage recommendation:
The uncoated cermet grade for finishing steel, stainless steel and tempered steel.

CTCK110



ISO | P10 | **K10**

Specification:
Composition: Co 5.0%, mixed carbides 2.0%, WC balance | Grain size: 1-2 µm | Hardness: HV30 1730 | Layer system: CVD TiCN-Al2O3

Usage recommendation:
The wear-resistant grade for machining cast iron materials and steels at high cutting speeds with a continuous cut.

CTCK120



ISO | P20 | **K20**

Specification:
Composition: Co 6.0%, mixed carbides 2.0%, WC balance | Grain size: 1 µm | Hardness: HV_{30} 1630 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
The grade for cast iron machining with high toughness reserves for difficult conditions and interrupted cuts.

CTCP115-P



ISO | **P15** | K25

Specification:
Composition: Co 5.5%; mixed carbides 6.4%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1530 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
The wear-resistant high-performance grade for steel machining with stable conditions and a continuous cut.

CTCP125-P



ISO | **P25** | K30

Specification:
Composition: Co 7.0%, mixed carbides 6.0%, WC balance | Grain size: 1-2 µm | Hardness: HV_{30} 1500 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
The first choice for the universal machining of steels.

CTCP135-P



ISO | **P35** | M25

Specification:
Composition: Co 9.6%, mixed carbides 7.8%, WC balance | Grain size: 1-2 µm | Hardness: HV_{30} 1460 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
The tough alternative for extremely interrupted cutting conditions.

9

Grade description

CTCM120



ISO | P15 | **M20**

Specification:
Composition: Co 7%, mixed carbides 6%, WC balance | Grain size: 1-2 µm | Hardness: HV_{30} 1500 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
Wear-resistant carbide grade for austenitic, stainless steel with the best levels of performance with a smooth cut.

CTPM125



ISO | P35 | **M25**

Specification:
Composition: Co 9.6%; mixed carbides 7.8%; others 0.4%; WC balance | Grain size: 1 - 2 µm | Hardness: HV_{30} 1460 | Coating specification: PVD TiAlTaN

Recommended application:
The first choice for the machining of austenitic steels

CTCM130



ISO | P25 | **M30** | S30

Specification:
Composition: Co 9.6%, mixed carbides 7.8%, WC balance | Grain size: 1-2 µm | Hardness: HV_{30} 1460 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
Robust turning grade for austenitic stainless steel with interrupted cuts.

H210T



ISO | K10 | **N10 | S10** | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 0.8 µm | Hardness: HV_{30} 1850

Recommended application:
The wear-resistant uncoated carbide grade for the machining of aluminium and other non-ferrous metals.

H10T

ISO | K15 | **N15** | S15 | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1630

Recommended application:
The uncoated carbide grade for the machining of aluminium and other non-ferrous metals

H216T



ISO | K15 | **N15** | S15 | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1630

Recommended application:
The uncoated carbide grade for the machining of aluminium and other non-ferrous metals

CTPX710



ISO | **P10 | M10** | K10 | **N10 | S15**

Specification:
Composition: Co 6.0%; WC balance | Grain size: 0.8 µm | Hardness: HV_{30} 1820 | Layer system: PVD AlTiN

Usage recommendation:
The universal carbide grade for the most demanding machining requirements on multiple materials.

CTPX715



ISO | **P15 | M15** | K15 | **N15 | S20** | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1650 | Layer system: PVD AlTiN

Usage recommendation:
The universal carbide grade for the most demanding machining requirements on multiple materials.

Grade description

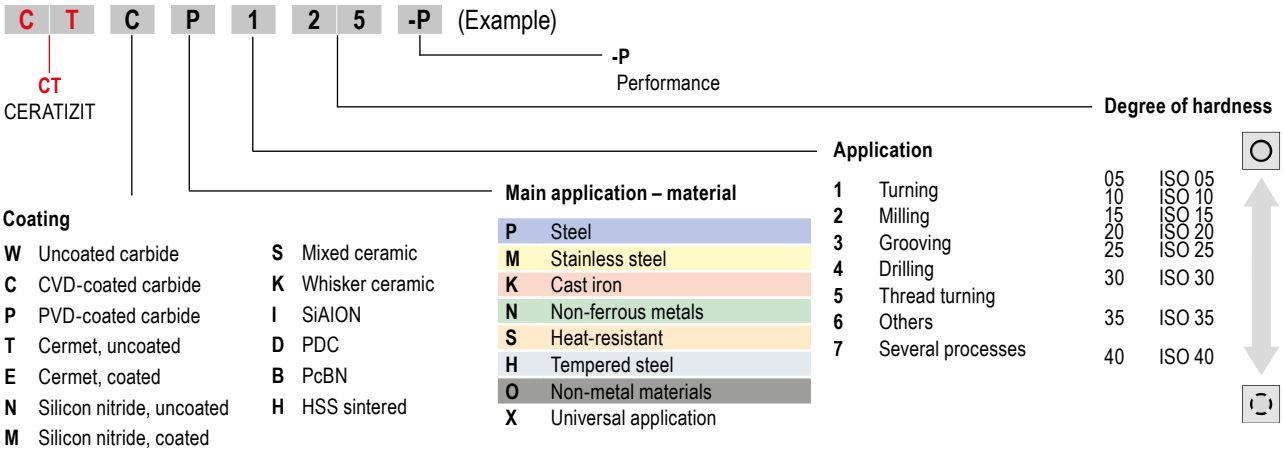

New products for machining technicians

NEW ISO-P indexable inserts



Update of the reliable CVD EcoCut grades CTCP425 / CTCP435. With the update, the grades are more wear-resistant and have a wear-detection coating layer.

→ Page 11

NEW EcoCut Classic with direct machine interface



The new EcoCut Classic product range with direct machine interface performs the same application functions as all other EcoCut Classic tools, but the new monotools impress when it comes to stability – and therefore run quietly and very reliably. Furthermore, chip removal has been optimised thanks to the updated chip space, guaranteeing process security.

→ Page 15+16

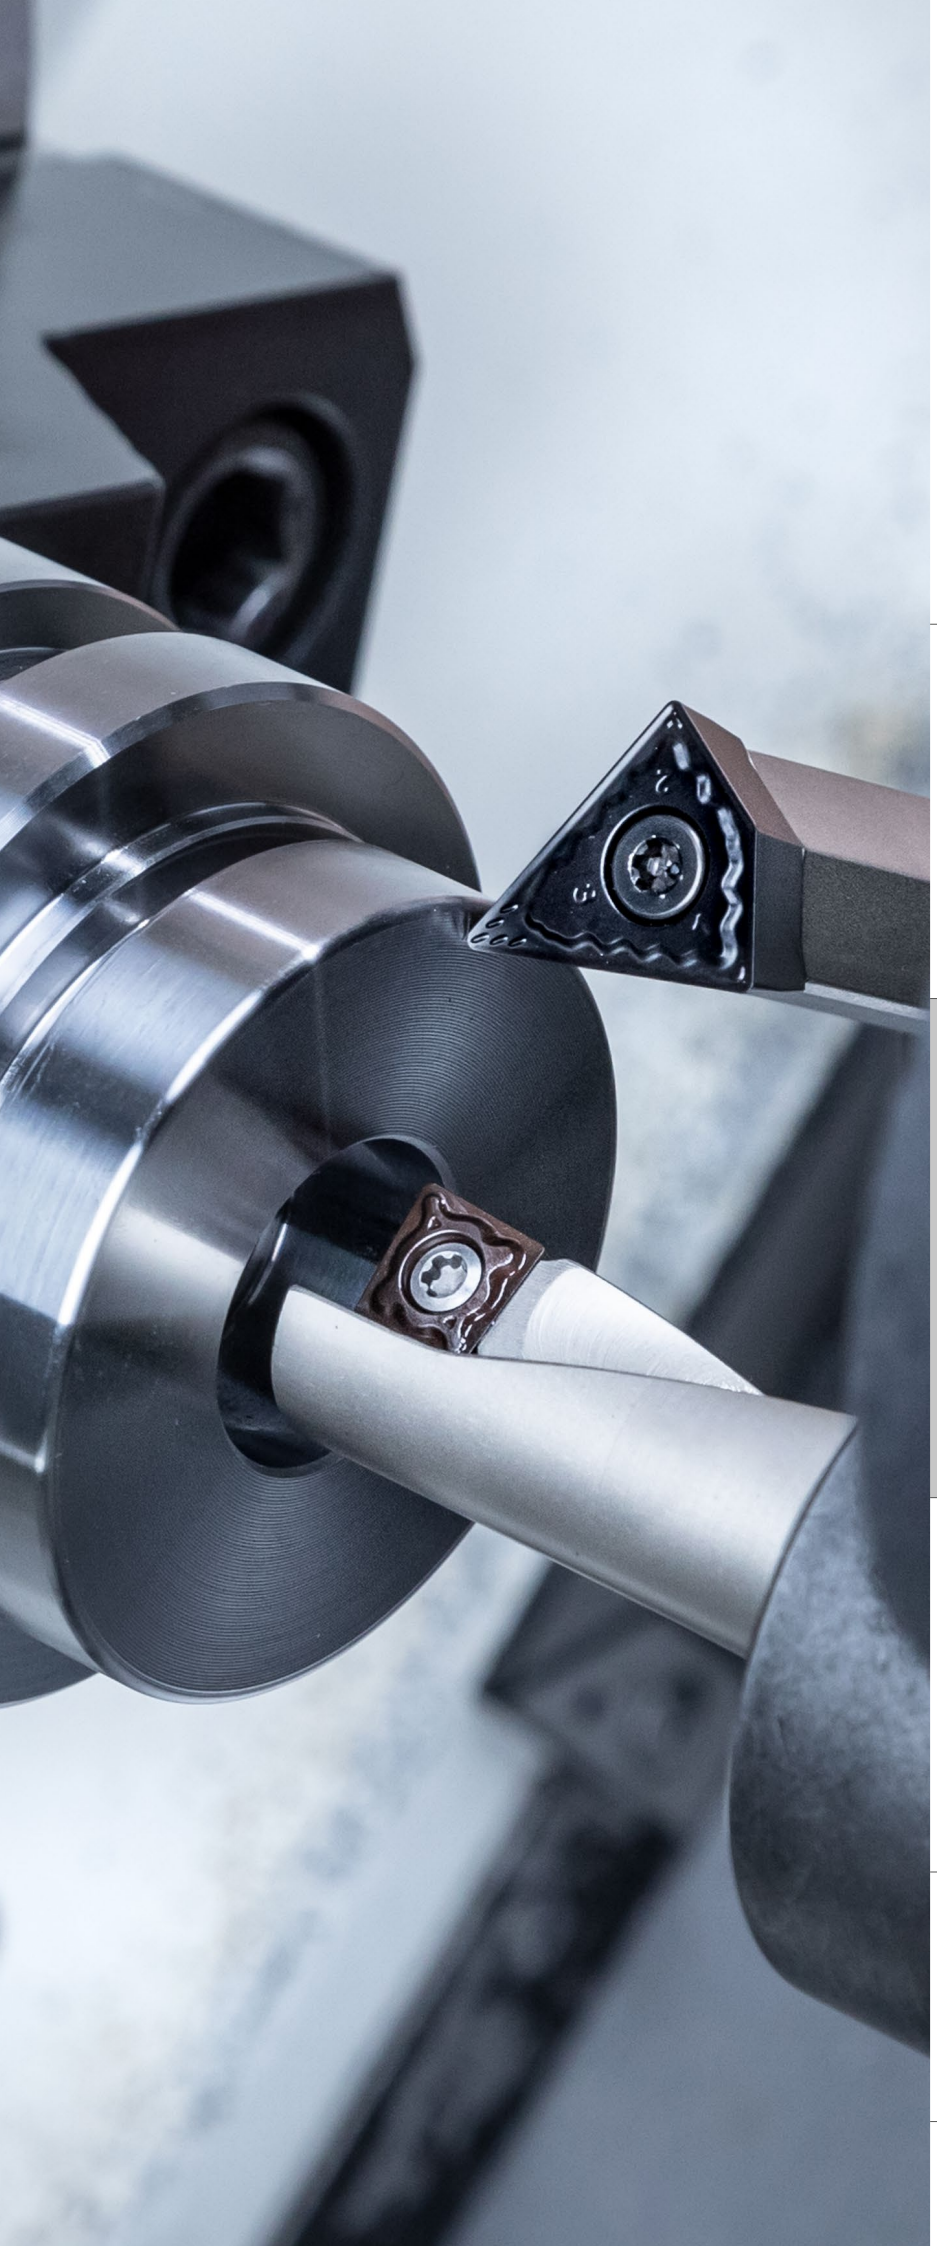

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Advantages of FreeTurn / EcoCut	4+5
Example applications / explanation of symbols	5
Toolfinder	6+7
Product programme	8–26
Technical Information	
General cutting data	27–29
EcoCut Mini Cutting Data	30+31
EcoCut Classic Cutting Data	32+33
EcoCut ProfileMaster Cutting Data	34+35
FreeTurn cutting data	36
EcoCut chip breaker overview	37
FreeTurn chip breaker overview	38
Application information	39–47
Grade overview and application	48–50
FreeTurn / EcoCut designation system	51+52

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Advantages of FreeTurn

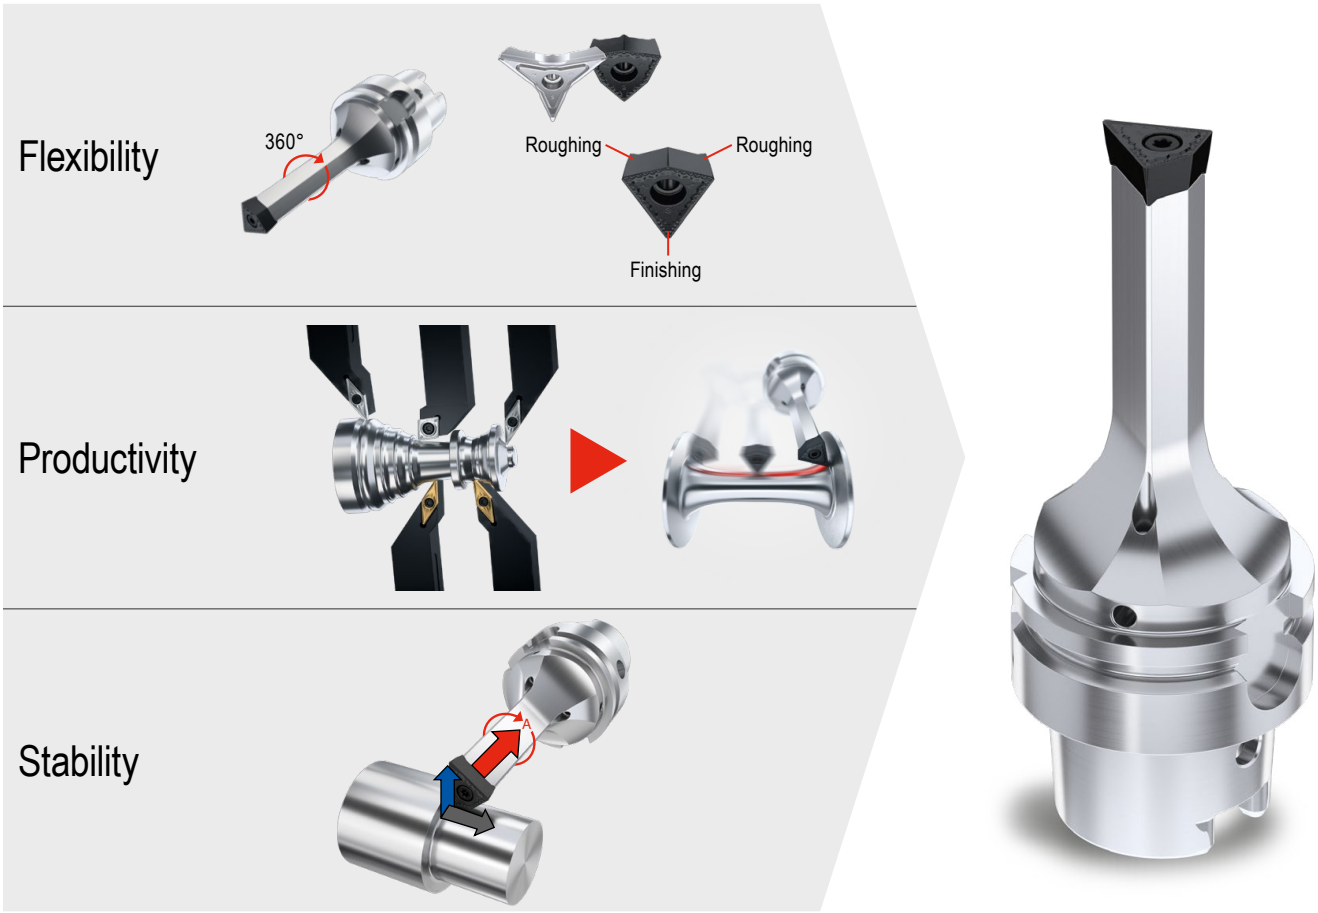

Advantages of EcoCut

- ▲ reduced machining time
- ▲ reduced need for tool positions
- ▲ generates flat bottom of hole
- ▲ less programming
- ▲ lower set-up costs / reduced setting time
- ▲ time savings due to fewer tool changes

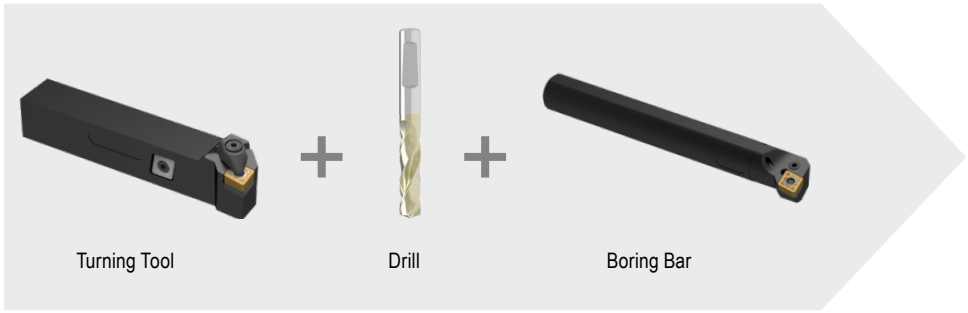

Application examples

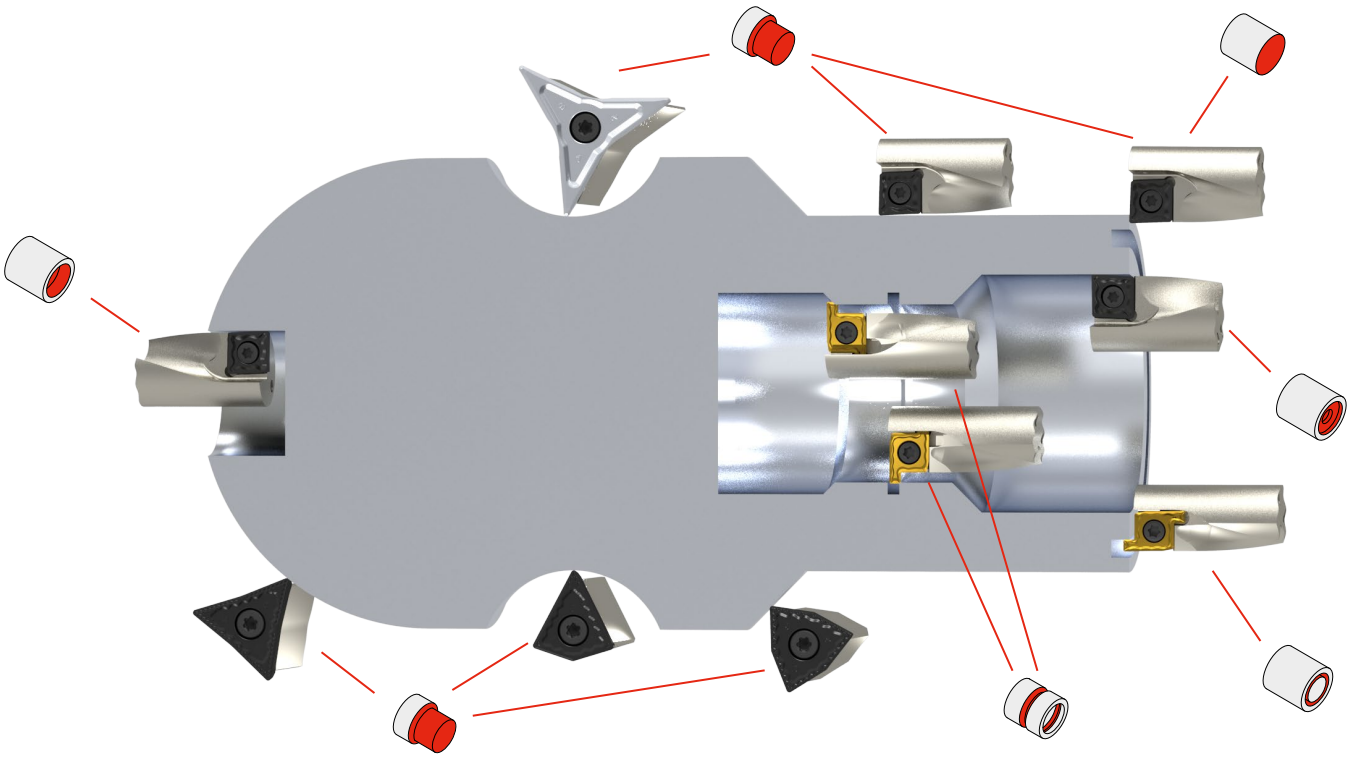

Symbol explanation

Turning outside profiles

Face turning

Drilling into full material

Turning internal profiles

External / internal radial grooving

Axial grooving

Int. coolant supply

-28P — Polished chip breaker
H216T — Carbide Grade

F	Fine Machining
M	Medium Machining
R	Rough Machining

Smooth cut
Irregular cutting depth
Interrupted cut

Toolfinder

Tool system	EcoCut Mini	EcoCut Classic
Application		
Machine interface	→ 9+10 Adapter for EcoCut Mini	 HSK-T 63 PSC 50 PSC 63
Lengths and diameters Versions	2,25xD Ø 2–8 → 8 4,0xD Ø 2–8 → 8	1,5xD Ø 8–32  → 12 2,25xD Ø 8–32 → 13 3,0xD Ø 8–32 → 14 2,25xD Ø 16–32 HSK-T → 15 2,25xD Ø 16–32  PSC → 16
Cutting material designation	CTPP435 | CTPP435 | CTWN425 | CTWN425	CTCP425-P | -M50Q CTCP425-P | CTCP435-P | CTPP430 | -27P H216T | -27Q H210T
Cutting conditions	DRAGONSKIN	DRAGONSKIN
	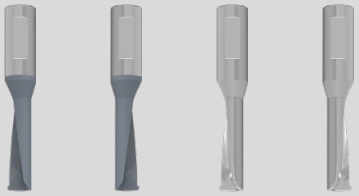	
	Solid carbide Left-hand | Solid carbide Right-hand | Solid carbide Left-hand | Solid carbide Right-hand	M XCNT | M XCNT | M XCNT | M XCNT | M XCET | M XCET
Application range	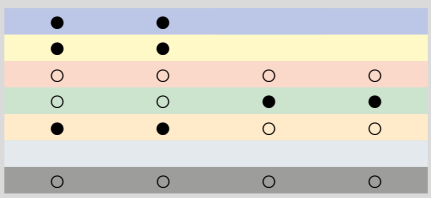	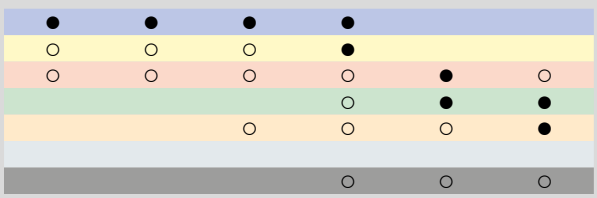
Page No.	→ 8 | → 8 | → 8 | → 8	→ 11 | → 11 | → 11 | → 11 | → 11 | → 11
	→ v_c Page 28	→ v_c Page 28

→ **Page 39**
EcoCut tools are suitable for off-centre drilling. This permits certain deviations from the nominal tool diameter to be achieved.

EcoCut ProfileMaster





1,5xD
Ø 10–32



→ 18

2,25xD
Ø 10–32



→ 19

-M20 CTPP430	-M20 CTPP430
DRAGONSKIN	DRAGONSKIN

M	M
PM-R	PM-L
●	●
●	●
○	○
○	○
●	●
○	○

→ 17 → 17

→ v_c Page 28

FreeTurn

HSK-T 63

PSC 63

HSK-T

LPR = 100
LPR = 125

→ 23+26

PSC

LPR = 100
LPR = 125

→ 24+26

CTCP125	CTPM125	-28P H216T	-F CTCP125	CTCP125	CTPM125	CTCP125	CTPM125
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN



M	M	F	F	F	F	F	F	M	M	M
FT15 . 808055...			FT15 . 353535...			FT15 . 555555...			FT17 . 808080...		
●	○			●		●	○		●	○	
	●						●			●	
○			○	○		○			○		
			●								
			○								
			○								

→ 20 → 20 → 21 → 21 → 22 → 22 → 25 → 25

→ v_c Page 29

10

EcoCut – Mini

▲ Drilling and turning tool for small diameters



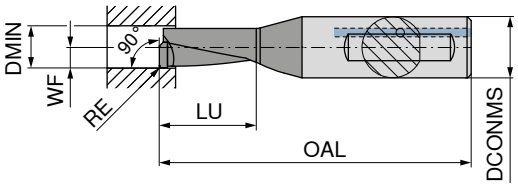

Illustrations show right-hand versions

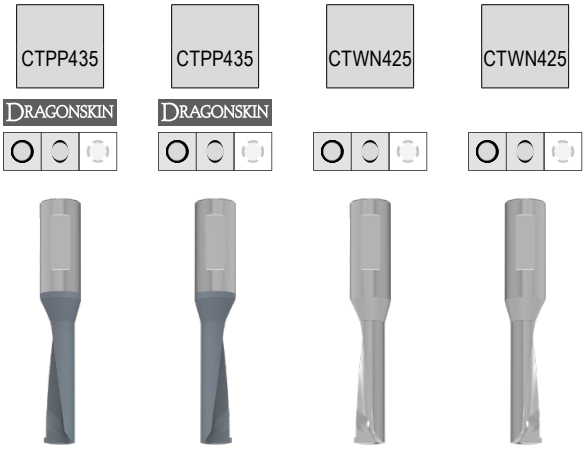

							Solid carbide Left-hand		Solid carbide Right-hand		Solid carbide Left-hand		Solid carbide Right-hand	
							70 805 ...		70 804 ...		70 805 ...		70 804 ...	
ISO designation	DMIN mm	DCONMS mm	OAL mm	LU mm	WF mm	RE mm	EUR 2B/20		EUR 2B/20		EUR 2B/20		EUR 2B/20	
ECM 02 R/L 2,25D	2,0	4	28	4,50	1,00	0,1	66,97	320	66,97	320				
ECM 02 R/L 2,25D AL	2,0	4	28	4,50	1,00	0,1					59,05	420	59,05	420
ECM 02 R/L 4,00D	2,0	4	31	8,00	1,00	0,1	70,26	321	70,26	321				
ECM 02 R/L 4,00D AL	2,0	4	31	8,00	1,00	0,1					61,92	421	61,92	421
ECM 02,5 R/L 2,25D	2,5	4	29	5,63	1,25	0,1	69,04	325	69,04	325				
ECM 02,5 R/L 2,25D AL	2,5	4	29	5,63	1,25	0,1					60,82	425	60,82	425
ECM 02,5 R/L 4,00D	2,5	4	33	10,00	1,25	0,1	72,46	326	72,46	326				
ECM 02,5 R/L 4,00D AL	2,5	4	33	10,00	1,25	0,1					63,85	426	63,85	426
ECM 03 R/L 2,25D	3,0	4	31	6,75	1,50	0,1	71,21	330	71,21	330				
ECM 03 R/L 2,25D AL	3,0	4	31	6,75	1,50	0,1					62,74	430	62,74	430
ECM 03 R/L 4,00D	3,0	4	35	12,00	1,50	0,1	74,77	331	74,77	331				
ECM 03 R/L 4,00D AL	3,0	4	35	12,00	1,50	0,1					65,89	431	65,89	431
ECM 03,5 R/L 2,25D	3,5	4	32	7,88	1,75	0,1	73,95	335	73,95	335				
ECM 03,5 R/L 2,25D AL	3,5	4	32	7,88	1,75	0,1					65,19	435	65,19	435
ECM 03,5 R/L 4,00D	3,5	4	37	14,00	1,75	0,1	77,64	336	77,64	336				
ECM 03,5 R/L 4,00D AL	3,5	4	37	14,00	1,75	0,1					68,47	436	68,47	436
ECM 04 R/L 2,25D	4,0	6	35	9,00	2,00	0,2	78,54	300	78,54	300				
ECM 04 R/L 2,25D AL	4,0	6	35	9,00	2,00	0,2					69,17	450	69,17	450
ECM 04 R/L 4,00D	4,0	6	41	16,00	2,00	0,2	82,45	301	82,45	301				
ECM 04 R/L 4,00D AL	4,0	6	41	16,00	2,00	0,2					72,64	451	72,64	451
ECM 05 R/L 2,25D	5,0	6	37	11,25	2,50	0,2	81,25	302	81,25	302				
ECM 05 R/L 2,25D AL	5,0	6	37	11,25	2,50	0,2					71,14	452	71,14	452
ECM 05 R/L 4,00D	5,0	6	45	20,00	2,50	0,2	85,01	303	85,01	303				
ECM 05 R/L 4,00D AL	5,0	6	45	20,00	2,50	0,2					74,60	453	74,60	453
ECM 06 R/L 2,25D	6,0	8	38	13,50	3,00	0,2	83,36	306	83,36	306				
ECM 06 R/L 2,25D AL	6,0	8	38	13,50	3,00	0,2					73,55	456	73,55	456
ECM 06 R/L 4,00D	6,0	8	49	24,00	3,00	0,2	87,56	312	87,56	312				
ECM 06 R/L 4,00D AL	6,0	8	49	24,00	3,00	0,2					76,86	462	76,86	462
ECM 07 R/L 2,25D	7,0	8	42	15,75	3,50	0,2	85,91	308	85,91	308				
ECM 07 R/L 2,25D AL	7,0	8	42	15,75	3,50	0,2					75,80	458	75,80	458
ECM 07 R/L 4,00D	7,0	8	53	28,00	3,50	0,2	90,44	314	90,44	314				
ECM 07 R/L 4,00D AL	7,0	8	53	28,00	3,50	0,2					79,29	464	79,29	464
ECM 08 R/L 2,25D	8,0	8	45	18,00	4,00	0,2	88,78	310	88,78	310				
ECM 08 R/L 2,25D AL	8,0	8	45	18,00	4,00	0,2					77,92	460	77,92	460
ECM 08 R/L 4,00D	8,0	8	57	32,00	4,00	0,2	92,99	316	92,99	316				
ECM 08 R/L 4,00D AL	8,0	8	57	32,00	4,00	0,2					81,68	466	81,68	466
P							●		●					
M							●		●					
K							○		○		○		○	
N							○		○		●		●	
S							●		●		○		○	
H														
O							○		○		○		○	

→ v_c Page 28

EcoCut – Adapter Mini

Scope of supply:

Toolholder with one clamping screw and one screwdriver

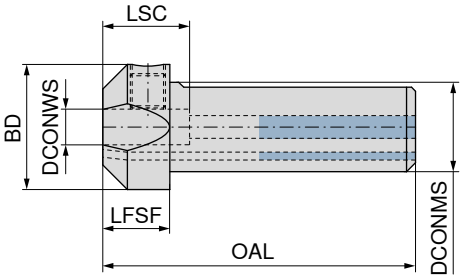

Designation	DCONWS mm	DCONMS mm	BD mm	OAL mm	LFSF mm	LSC mm	70 800 ... EUR 2B/20	
EC-ADX16-04	4	16	22	59	14	18	243,40	**716**
EC-ADX20-04	4	20	25	64	14	18	243,40	**720**
EC-ADX16-06	6	16	22	59	14	18	243,40	**976**
EC-ADX20-06	6	20	25	64	14	18	243,40	**996**
EC-ADX16-08	8	16	22	59	14	18	243,40	**978**
EC-ADX20-08	8	20	25	64	14	18	243,40	**998**

Clamping screw

Spare parts DCONWS		70 950 ... EUR 2A/28	
4	M5x10 ISO 4026	3,84	**867**
6	M8x1x8 - SW4	3,84	**123**
8	M8x1x8 - SW4	3,84	**123**

EcoCut – Mini adapter with coolant connection thread

Scope of supply:

Toolholder with one clamping screw and one screwdriver

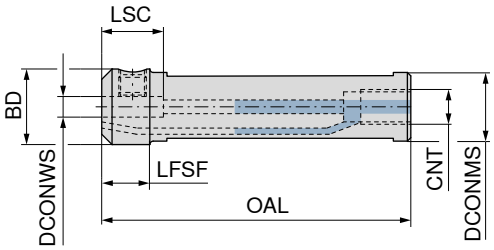

Designation	DCONWS mm	DCONMS mm	BD mm	OAL mm	LFSF mm	LSC mm	CNT	70 801 ... EUR 2B/20	
ECA 16-04	4	16	20,0	75	14	18	G 1/8	129,90	**716**
ECA 20-04	4	20	19,6	90	14	18	G 1/8	132,70	**720**
ECA 22-04	4	22	21,6	110	14	18	G 1/8	136,70	**722**
ECA 16-06	6	16	22,0	75	14	18	G 1/8	129,90	**816**
ECA 20-06	6	20	22,0	90	14	18	G 1/8	132,70	**820**
ECA 22-06	6	22	21,6	110	14	18	G 1/8	136,70	**822**
ECA 16-08	8	16	22,0	75	14	18	G 1/8	129,90	**916**
ECA 20-08	8	20	22,0	90	14	18	G 1/8	132,70	**920**
ECA 22-08	8	22	21,6	110	14	18	G 1/8	136,70	**922**

Clamping screw

Spare parts DCONWS		70 950 ... EUR 2A/28	
4	M5X8 - DIN 913	1,95	**13200**
6	M8x1x8 - SW4	3,84	**123**
8	M8x1x8 - SW4	3,84	**123**

XCNT / XCET

Designation	S	D1	IC
	mm	mm	mm
XC.T 0401..	1,80	2,10	4,5
XC.T 0502..	2,10	2,25	5,8
XC.T 0602..	2,38	2,50	6,5
XC.T 0703..	3,18	2,80	7,6
XC.T 0803..	3,18	3,40	8,5
XC.T 09T3..	3,97	3,40	9,6
XC.T 10T3..	3,97	4,40	10,6
XC.T 1304..	4,76	5,30	13,5
XC.T 1705..	5,56	5,30	17,5



XC. T 04..



XC. T 05../06../07../08../09../10../13../17..

XCNT / XCET

	NEW	NEW	NEW			
	-EN CTCP425-P	-M50Q CTCP425-P	-EN CTCP435-P	-EN CTPP430	-27P H216T	-27Q H210T
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN		
						
	M	M	M	M	M	M
	XCNT	XCNT	XCNT	XCNT	XCET	XCET
	70 386 ...	70 386 ...	70 386 ...	70 386 ...	70 286 ...	70 286 ...

ISO	RE	EUR 1D/19		EUR 1D/19		EUR 1D/19		EUR 1D/19		EUR 1D/19		EUR 1D/19	
	mm												
040102EL	0,2	20,34	72001			20,34	82001	20,34	920				
040102ER	0,2	20,34	72201			20,34	82201	20,34	922				
040102FL	0,2									22,77	620	23,67	120
040102FR	0,2									22,77	622	23,67	122
040104EL	0,4	20,34	70001	21,22	75001	20,34	80001	20,34	900				
040104ER	0,4	20,34	70201	21,22	75201	20,34	80201	20,34	902				
040104FL	0,4									22,77	600	23,67	100
040104FR	0,4									22,77	602	23,67	102
050202EN	0,2	20,34	72301			20,34	82301	20,34	923				
050202FN	0,2									22,77	623	23,67	123
050204EN	0,4	20,34	70301	21,22	75301	20,34	80301	20,34	903				
050204FN	0,4									22,77	603	23,67	103
060202EN	0,2	20,34	72401			20,34	82401	20,34	924				
060202FN	0,2									22,77	624	23,67	124
060204EN	0,4	20,34	70401	21,22	75401	20,34	80401	20,34	904				
060204FN	0,4									22,77	604	23,67	104
070304EN	0,4	20,34	70501	21,22	75501	20,34	80501	20,34	905				
070304FN	0,4									22,77	605	23,67	105
080304EN	0,4	20,66	70601	21,55	75601	20,66	80601	20,66	906				
080304FN	0,4									23,09	606	23,96	106
09T304EN	0,4	20,96	70701	22,01	75701	20,96	80701	20,96	907				
09T304FN	0,4									23,21	607	24,12	107
10T304EN	0,4	22,01	70801	22,91	75801	22,01	80801	22,01	908				
10T304FN	0,4									23,67	608	24,90	108
10T308EN	0,8	22,01	73801	22,91	78801	22,01	83801	22,01	938				
10T308FN	0,8									23,67	628	24,90	128
130404EN	0,4	25,17	71001	26,37	76001	25,17	81001	25,17	910				
130404FN	0,4									28,95	610	30,14	110
130408EN	0,8	25,17	74001	26,37	79001	25,17	84001	25,17	940				
130408FN	0,8									28,95	611	30,14	111
170508EN	0,8	26,54	71201	27,89	76201	26,54	81201	26,54	912				
170508FN	0,8									29,38	612	30,89	112

P	●	●	●	●		
M	○	○	○	●		
K	○	○	○	○	●	○
N				○	●	●
S			○	○	○	●
H						
O				○	○	○

→ v_c Page 28

10

EcoCut – Classic 1.5xD

▲ Drilling and turning tool

Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



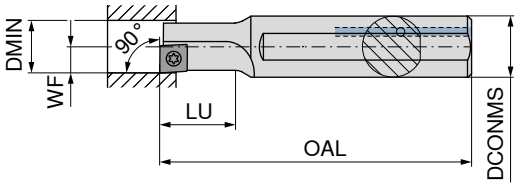

Illustrations show right-hand versions

Left-hand

Right-hand

ISO designation	DMIN mm	DCONMS mm	OAL mm	LU mm	WF mm	torque moment Nm	Insert	70 805 ... EUR 2B/20		70 804 ... EUR 2B/20	
ECC 08 L 1,5D 04	8	12	80	12,0	4,0	0,4	XC.T 0401..EL	205,20	**008** [2]		
ECC 08 R 1,5D 04	8	12	80	12,0	4,0	0,4	XC.T 0401..ER			205,20	**008** [1]
ECC 10 R/L 1,5D 05	10	12	90	15,0	5,0	0,7	XC.T 0502..	205,20	**010**	205,20	**010**
ECC 12 R/L 1,5D 06	12	16	100	18,0	6,0	1,0	XC.T 0602..	208,50	**012**	208,50	**012**
ECC 14 R/L 1,5D 07	14	16	110	21,0	7,0	1,2	XC.T 0703..	213,50	**014**	213,50	**014**
ECC 16 R/L 1,5D 08	16	20	125	24,0	8,0	2,2	XC.T 0803..	216,90	**016**	216,90	**016**
ECC 18 R/L 1,5D 09	18	25	135	27,0	9,0	2,2	XC.T 09T3..	250,10	**018**	250,10	**018**
ECC 20 R/L 1,5D 10	20	25	150	30,0	10,0	3,2	XC.T 10T3..	281,90	**020**	281,90	**020**
ECC 25 R/L 1,5D 13	25	32	180	37,5	12,5	5,0	XC.T 1304..	325,20	**025**	325,20	**025**
ECC 32 R/L 1,5D 17	32	40	200	48,0	16,0	5,0	XC.T 1705..	368,60	**032**	368,60	**032**

1) Note! Right-hand insert on right-hand tool
2) Note! Left-hand insert on left-hand tool

Key D

Clamping screw

Spare parts Insert		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
XC.T 0401..EL	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
XC.T 0401..ER	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
XC.T 0502..	T06 - IP	13,39	**123**	M2x4,3 - IP	4,31	**863**
XC.T 0602..	T07 - IP	13,18	**124**	M2,2x5 - IP	4,19	**856**
XC.T 0703..	T08 - IP	13,16	**125**	M2,5x6 - IP	5,38	**857**
XC.T 0803..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 09T3..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 10T3..	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
XC.T 1304..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**
XC.T 1705..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**

EcoCut – Classic 2.25xD

▲ Drilling and turning tool

Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



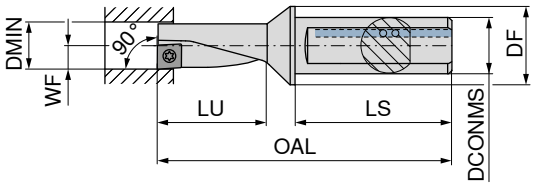

Illustrations show right-hand versions

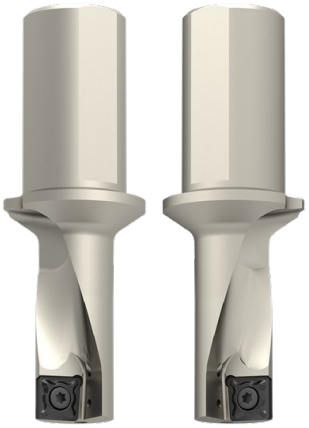

Left-hand | Right-hand

ISO designation	DMIN mm	DCONMS mm	DF mm	OAL mm	LU mm	LS mm	WF mm	torque moment Nm	Insert	70 805 ... EUR 2B/20		70 804 ... EUR 2B/20	
ECC 08 L 2,25D 04	8	10	15	60,0	18,0	38	4,0	0,4	XC.T 0401..EL	305,10	**108** [2]		
ECC 08 R 2,25D 04	8	10	15	60,0	18,0	38	4,0	0,4	XC.T 0401..ER			305,10	**108** [1]
ECC 10 R/L 2,25D 05	10	12	18	69,5	22,5	42	5,0	0,7	XC.T 0502..	305,10	**110**	305,10	**110**
ECC 12 R/L 2,25D 06	12	16	22	78,0	27,0	45	6,0	1,0	XC.T 0602..	313,60	**112**	313,60	**112**
ECC 14 R/L 2,25D 07	14	16	23	83,5	31,5	45	7,0	1,2	XC.T 0703..	320,40	**114**	320,40	**114**
ECC 16 R/L 2,25D 08	16	20	28	94,0	36,0	50	8,0	2,2	XC.T 0803..	327,10	**116**	327,10	**116**
ECC 18 R/L 2,25D 09	18	25	36	109,5	40,5	56	9,0	2,2	XC.T 09T3..	360,40	**118**	360,40	**118**
ECC 20 R/L 2,25D 10	20	25	35	111,0	45,0	56	10,0	3,2	XC.T 10T3..	392,20	**120**	392,20	**120**
ECC 25 R/L 2,25D 13	25	32	44	129,0	56,5	60	12,5	5,0	XC.T 1304..	455,40	**125**	455,40	**125**
ECC 32 R/L 2,25D 17	32	40	54	158,0	72,0	70	16,0	5,0	XC.T 1705..	512,00	**132**	512,00	**132**

1) Note! Right-hand insert on right-hand tool
2) Note! Left-hand insert on left-hand tool

10

Key D

Clamping screw

Spare parts Insert		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
XC.T 0401..EL	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
XC.T 0401..ER	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
XC.T 0502..	T06 - IP	13,39	**123**	M2x4,3 - IP	4,31	**863**
XC.T 0602..	T07 - IP	13,18	**124**	M2,2x5 - IP	4,19	**856**
XC.T 0703..	T08 - IP	13,16	**125**	M2,5x6 - IP	5,38	**857**
XC.T 0803..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 09T3..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 10T3..	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
XC.T 1304..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**
XC.T 1705..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**

EcoCut – Classic 3xD – Heavy metal

▲ Drilling and turning tool
▲ vibration-damped

Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



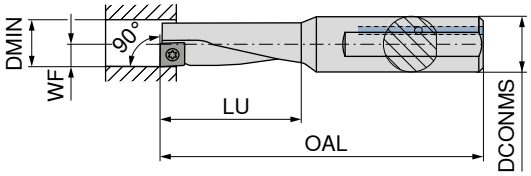

Illustrations show right-hand versions

Left-hand

Right-hand

ISO designation	DMIN mm	DCONMS mm	OAL mm	LU mm	WF mm	torque moment Nm	Insert	70 805 ... EUR 2B/20		70 804 ... EUR 2B/20	
ECC 08 L 3,00D 04 H	8	12	80	24	4,0	0,4	XC.T 0401..EL	752,60	**608** [2]		
ECC 08 R 3,00D 04 H	8	12	80	24	4,0	0,4	XC.T 0401..ER			752,60	**608** [1]
ECC 10 R/L 3,00D 05 H	10	12	85	30	5,0	0,7	XC.T 0502..	755,90	**610**	755,90	**610**
ECC 12 R/L 3,00D 06 H	12	16	95	36	6,0	1,0	XC.T 0602..	815,80	**612**	815,80	**612**
ECC 14 R/L 3,00D 07 H	14	16	100	42	7,0	1,2	XC.T 0703..	834,80	**614**	834,80	**614**
ECC 16 R/L 3,00D 08 H	16	20	110	48	8,0	2,2	XC.T 0803..	915,40	**616**	915,40	**616**
ECC 18 R/L 3,00D 09 H	18	25	125	54	9,0	2,2	XC.T 09T3..	1.108,00	**618**	1.108,00	**618**
ECC 20 R/L 3,00D 10 H	20	25	130	60	10,0	3,2	XC.T 10T3..	1.131,00	**620**	1.131,00	**620**
ECC 25 R/L 3,00D 13 H	25	32	150	75	12,5	5,0	XC.T 1304..	1.440,00	**625**	1.440,00	**625**
ECC 32 R/L 3,00D 17 H	32	40	185	96	16,0	5,0	XC.T 1705..	1.885,00	**632**	1.885,00	**632**

1) Note! Right-hand insert on right-hand tool
2) Note! Left-hand insert on left-hand tool



Key D

Clamping screw

Spare parts Insert		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
XC.T 0401..EL	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
XC.T 0401..ER	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
XC.T 0502..	T06 - IP	13,39	**123**	M2x4,3 - IP	4,31	**863**
XC.T 0602..	T07 - IP	13,18	**124**	M2,2x5 - IP	4,19	**856**
XC.T 0703..	T08 - IP	13,16	**125**	M2,5x6 - IP	5,38	**857**
XC.T 0803..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 09T3..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 10T3..	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
XC.T 1304..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**
XC.T 1705..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**

EcoCut – HSK-T 2.25xD

Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



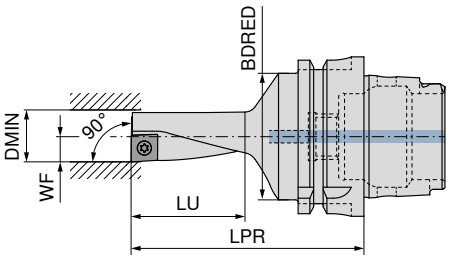

Illustrations show right-hand versions

NEW NEW

									Left-hand		Right-hand	
									74 591 ...		74 590 ...	
ISO designation	Adapter	LPR mm	LU mm	BDRED mm	WF mm	DMIN mm	torque moment Nm	Insert	EUR 2D/80		EUR 2D/80	
HSK-T 63 ECC 16 R/L 2,25D 08	HSK-T 63	84	36,00	50	8,0	16	2,2	XC.T 0803..	392,50	**51637**	392,50	**51637**
HSK-T 63 ECC 20 R/L 2,25D 10	HSK-T 63	92	45,00	50	10,0	20	3,2	XC.T 10T3..	470,60	**52037**	470,60	**52037**
HSK-T 63 ECC 25 R/L 2,25D 13	HSK-T 63	104	56,25	50	12,5	25	5,0	XC.T 1304..	546,50	**52537**	546,50	**52537**
HSK-T 63 ECC 32 R/L 2,25D 17	HSK-T 63	120	72,00	50	16,0	32	5,0	XC.T 1705..	614,40	**53237**	614,40	**53237**

Key D

Clamping screw

		80 950 ...			70 950 ...	
Spare parts		EUR			EUR	
Insert		Y7			2A/28	
XC.T 0803..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 10T3..	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
XC.T 1304..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**
XC.T 1705..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**

10

EcoCut – Classic PSC 2,25xD

Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



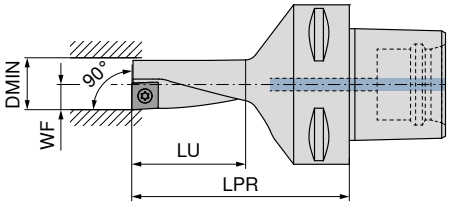

Illustrations show right-hand versions

NEW NEW

ISO designation	Adapter	LPR mm	LU mm	WF mm	DMIN mm	torque moment Nm	Insert	Left-hand 74 591 ... EUR 2D/80		Right-hand 74 590 ... EUR 2D/80	
PSC 50 ECC 16 R/L 2,25D 08	PSC 50	70	36,00	8,0	16	2,2	XC.T 0803..	392,50	**51694**	392,50	**51694**
PSC 50 ECC 20 R/L 2,25D 10	PSC 50	81	45,00	10,0	20	3,2	XC.T 10T3..	470,60	**52094**	470,60	**52094**
PSC 50 ECC 25 R/L 2,25D 13	PSC 50	93	56,25	12,5	25	5,0	XC.T 1304..	546,50	**52594**	546,50	**52594**
PSC 50 ECC 32 R/L 2,25D 17	PSC 50	110	72,00	16,0	32	5,0	XC.T 1705..	614,40	**53294**	614,40	**53294**
PSC 63 ECC 16 R/L 2,25D 08	PSC 63	75	36,00	8,0	16	2,2	XC.T 0803..	392,50	**51693**	392,50	**51693**
PSC 63 ECC 20 R/L 2,25D 10	PSC 63	86	45,00	10,0	20	3,2	XC.T 10T3..	470,60	**52093**	470,60	**52093**
PSC 63 ECC 25 R/L 2,25D 13	PSC 63	97	56,25	12,5	25	5,0	XC.T 1304..	546,50	**52593**	546,50	**52593**
PSC 63 ECC 32 R/L 2,25D 17	PSC 63	114	72,00	16,0	32	5,0	XC.T 1705..	614,40	**53293**	614,40	**53293**

Key D

Clamping screw

Spare parts Insert		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
XC.T 0803..	T09 - IP	14,50	**126**	M3x7 - IP	4,14	**819**
XC.T 10T3..	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
XC.T 1304..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**
XC.T 1705..	T20 - IP	16,17	**129**	M4,5x10,5 - IP	4,14	**864**

PM-R / PM-L

Designation	CW	PDPT	L	S	D1
	mm	mm	mm	mm	mm
PM 10 G 201504	2,0	1,5	5,0	2,10	2,1
PM 12 G 201804	2,0	1,8	6,0	2,30	2,5
PM 16 G 252004	2,5	2,0	8,0	2,80	3,4
PM 20 G 302504	3,0	2,5	10,0	3,70	4,0
PM 25 G 353004	3,5	3,0	12,5	4,50	4,4
PM 32 G 404004	4,0	4,0	16,0	5,60	6,0





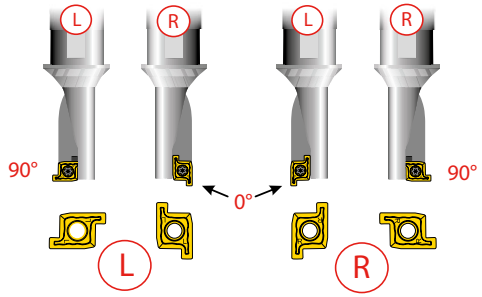

PM-L / PM-R

	-M20 CTPP430 DRAGONSKIN		-M20 CTPP430 DRAGONSKIN	
				
	M PM-L		**M** PM-R	
	70 289 ...		**70 289 ...**	
ISO RE mm	EUR 1F/P2		EUR 1F/P2	
PM 10 G 201504 0,4	21,89	**510**	21,89	**511**
PM 12 G 201804 0,4	22,08	**515**	22,08	**516**
PM 16 G 252004 0,4	22,34	**520**	22,34	**521**
PM 20 G 302504 0,4	23,38	**525**	23,38	**526**
PM 25 G 353004 0,4	26,02	**530**	26,02	**531**
PM 32 G 404004 0,4	28,10	**535**	28,10	**536**
P	●		●	
M	●		●	
K	○		○	
N	○		○	
S	●		●	
H				
O	○		○	

→ v_c Page 28

EcoCut – ProfileMaster 1.5xD

▲ Drilling, turning and grooving tool

Scope of supply:

Toolholder with one clamping screw and one screwdriver



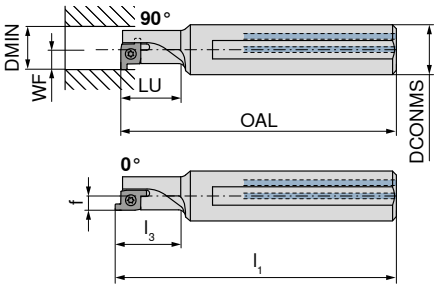

Illustrations show right-hand versions

											Left-hand		Right-hand	
											70 821 ...		**70 820 ...**	
ISO designation	DMIN	DCONMS	OAL	LU	WF	l_1	l_3	f	torque moment	Insert	**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	mm	mm	Nm		2G/P1		2G/P1	
PMC 10 R/L 1,5D	10	12	80	15	5,0				0,4	PM 10R/L	217,00	**010** [1]	217,00	**010** [1]
PMC 12 R/L 1,5D	12	16	90	18	6,0				1,0	PM 12R/L	224,80	**012** [1]	224,80	**012** [1]
PMC 16 R/L 1,5D	16	20	125	24	8,0	127,3	26,3	5,7	2,2	PM 16R/L	237,80	**016**	237,80	**016**
PMC 20 R/L 1,5D	20	25	150	30	10,0	152,8	32,8	7,2	2,2	PM 20R/L	293,60	**020**	293,60	**020**
PMC 25 R/L 1,5D	25	32	180	38	12,5	183,3	40,8	9,2	3,2	PM 25R/L	333,60	**025**	333,60	**025**
PMC 32 R/L 1,5D	32	40	200	48	16,0	204,3	52,3	11,7	5,0	PM 32R/L	381,60	**032**	381,60	**032**

1) only usable as 90° version

Key D

Clamping screw

		80 950 ...			**70 950 ...**		
Spare parts		**EUR**			**EUR**		
Insert		Y7			2A/28		
PM 10R/L	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
PM 12R/L	T07 - IP	13,18	**124**	M2,2x4,2 - IP	4,19	**137**
PM 16R/L	T09 - IP	14,50	**126**	M3x5,7 - IP	4,06	**008**
PM 20R/L	T15 - IP	15,33	**128**	M3x5,7 - IP	4,06	**009**
PM 25R/L	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
PM 32R/L	T20 - IP	16,17	**129**	M5x10,8 - IP	10,52	**010**

EcoCut – ProfileMaster 2.25xD

▲ Drilling, turning and grooving tool

Scope of supply:

Toolholder with one clamping screw and one screwdriver



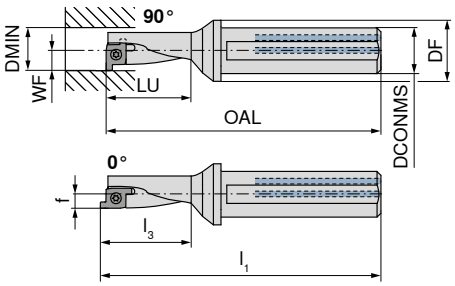

Illustrations show right-hand versions

												Left-hand		Right-hand	
												70 821 ...		**70 820 ...**	
ISO designation	DMIN	DCONMS	DF	OAL	LU	WF	l_1	l_3	f	torque moment	Insert	**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	Nm		2G/P1		2G/P1	
PMC 10 R/L 2,25D	10	12	18	72,4	22,50	5,0				0,4	PM 10R/L	319,10	**110** [1]	319,10	**110** [1]
PMC 12 R/L 2,25D	12	16	22	78,0	27,00	6,0				1,0	PM 12R/L	325,80	**112** [1]	325,80	**112** [1]
PMC 16 R/L 2,25D	16	20	28	96,5	36,00	8,0	98,8	38,3	5,7	2,2	PM 16R/L	343,20	**116**	343,20	**116**
PMC 20 R/L 2,25D	20	25	32	111,0	45,00	10,0	113,8	47,8	7,2	2,2	PM 20R/L	410,10	**120**	410,10	**120**
PMC 25 R/L 2,25D	25	32	44	132,6	56,25	12,5	135,9	59,6	9,2	3,2	PM 25R/L	471,00	**125**	471,00	**125**
PMC 32 R/L 2,25D	32	40	54	158,0	72,00	16,0	162,3	76,3	11,7	5,0	PM 32R/L	528,40	**132**	528,40	**132**

1) only usable as 90° version

Key D

Clamping screw

			80 950 ...			**70 950 ...**	
Spare parts			**EUR**			**EUR**	
Insert			Y7			2A/28	
PM 10R/L	T06 - IP	13,39	**123**	M1,8x3,6 - IP	4,84	**862**
PM 12R/L	T07 - IP	13,18	**124**	M2,2x4,2 - IP	4,19	**137**
PM 16R/L	T09 - IP	14,50	**126**	M3x5,7 - IP	4,06	**008**
PM 20R/L	T15 - IP	15,33	**128**	M3x5,7 - IP	4,06	**009**
PM 25R/L	T15 - IP	15,33	**128**	M3,5x8,6 - IP	4,14	**859**
PM 32R/L	T20 - IP	16,17	**129**	M5x10,8 - IP	10,52	**010**

FT15 . 808055...

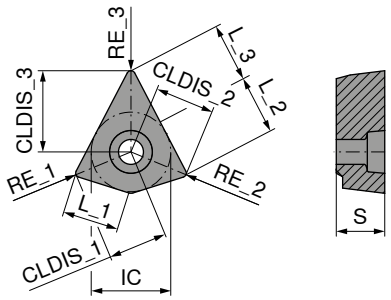

Designation	IC	CLDIS_1	L_1	CLDIS_2	L_2	CLDIS_3	L_3	S
	mm	mm	mm	mm	mm	mm	mm	mm
FT15 M 808055R080804-MMF	15	11,22	10,8	11,22	11,4	15,78	11,4	9,14
FT15 M 808055R08-MMF	15	11,22	10,8	11,22	11,2	15,31	11,2	9,14
FT15 M 808055R121208-MMF	15	11,00	10,7	11,00	11,2	15,31	11,2	9,14

M M F
FT15 . 808055...
74 003 ...

M M F
FT15 . 808055...
74 003 ...

ISO	RE_1	RE_2	RE_3	EUR	FW	EUR	FW
	mm	mm	mm				
FT15 M 808055R080804-MMF	0,8	0,8	0,4	28,31	00400		
FT15 M 808055R08-MMF	0,8	0,8	0,8	28,31	00200	28,31	10200
FT15 M 808055R121208-MMF	1,2	1,2	0,8	28,31	00600		

P	●	○
M		●
K	○	
N		
S		
H		
O		

→ v_c Page 29

FT15 . 353535...

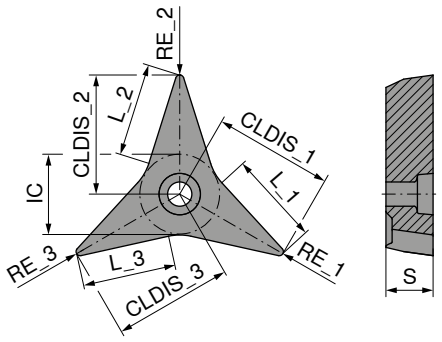

Designation	IC	CLDIS_1	L_1	CLDIS_2	L_2	CLDIS_3	L_3	S
	mm	mm	mm	mm	mm	mm	mm	mm
FT15 G 353535R04-28P	15	24,01	16,10	24,01	16,10	24,01	16,10	9,14
FT15 G 353535R08-28P	15	23,08	15,20	23,08	15,20	23,08	15,20	9,14
FT15 G 353535R08-F	15	23,08	14,96	23,08	14,96	23,08	14,96	9,14

ISO	RE_1	RE_2	RE_3	-F CTCP125		-28P H216T	
	mm	mm	mm				
				DRAGONSKIN		DRAGONSKIN	
				F F F		F F F	
				FT15 . 353535...		FT15 . 353535...	
				74 077 ...		74 001 ...	
				EUR FW		EUR FW	
FT15 G 353535R04-28P	0,4	0,4	0,4			47,29	20200
FT15 G 353535R08-28P	0,8	0,8	0,8			47,29	20400
FT15 G 353535R08-F	0,8	0,8	0,8	47,29	00400		
P				●			
M							
K				○			○
N							●
S							○
H							
O							○

10

→ v_c Page 29

FT15 . 555555...

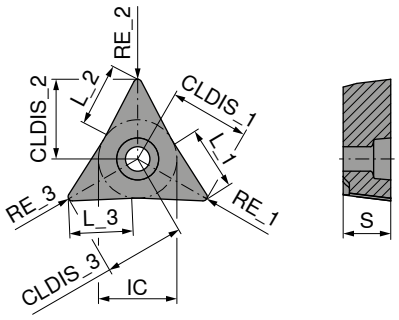

Designation	IC	CLDIS_1	L_1	CLDIS_2	L_2	CLDIS_3	L_3	S
	mm	mm	mm	mm	mm	mm	mm	mm
FT15 M 555555R04-FFF	15	15,78	12,6	15,78	12,6	15,78	12,6	9,14
FT15 M 555555R08-FFF	15	15,31	12,3	15,31	12,3	15,31	12,3	9,14

DRAGONSKIN

DRAGONSKIN

F F F

FT15 . 555555...

74 002 ...

F F F

FT15 . 555555...

74 002 ...

ISO	RE_1	RE_2	RE_3	EUR	FW	EUR	FW
	mm	mm	mm				
FT15 M 555555R04-FFF	0,4	0,4	0,4	24,35	00200		
FT15 M 555555R08-FFF	0,8	0,8	0,8	24,35	00400	24,35	10400
P				●		○	
M						●	
K				○			
N							
S							
H							
O							

→ v_c Page 29

FreeTurn – HSK-T tool holder FT15

▲ Tool holder for FreeTurn indexable insert
▲ DirectCooling coolant supply

Scope of supply:

Toolholder with one clamping screw and one screwdriver



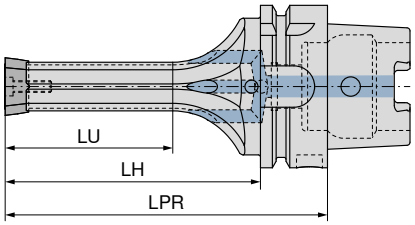

Figures show version FT15 . 808055...

ISO designation	Adapter	LPR mm	LH mm	LU mm	Insert	DirectCooling 74 700 ... EUR FT	
HSK-T63-100-FT15 353535	HSK-T 63	100	74	40	FT15 . 353535...	707,00	**00137**
HSK-T63-100-FT15 808055	HSK-T 63	100	74	40	FT15 . 808055...	707,00	**00537**
HSK-T63-100-FT15 555555	HSK-T 63	100	74	40	FT15 . 555555...	707,00	**00337**
HSK-T63-125-FT15 353535	HSK-T 63	125	99	65	FT15 . 353535...	719,70	**00237**
HSK-T63-125-FT15 808055	HSK-T 63	125	99	65	FT15 . 808055...	719,70	**00637**
HSK-T63-125-FT15 555555	HSK-T 63	125	99	65	FT15 . 555555...	719,70	**00437**

Spare parts		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
Adapter					
HSK-T 63	T20 - IP	12,62	**121**	M4,5x18 - IP	11,08 **25900**

10

FreeTurn – PSC tool holder FT15

▲ Tool holder for FreeTurn indexable insert
▲ DirectCooling coolant supply

Scope of supply:

Toolholder with one clamping screw and one screwdriver



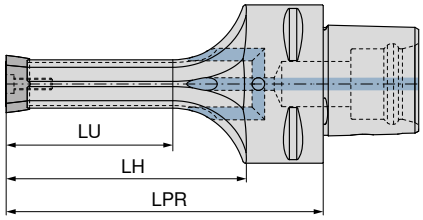

Figures show version FT15 . 808055...

DirectCooling

ISO designation	Adapter	LPR mm	LH mm	LU mm	Insert	74 700 ... EUR FT	
PSC-63-100-FT15 353535	PSC 63	100	69,4	40	FT15 . 353535...	820,80	**00193**
PSC-63-100-FT15 808055	PSC 63	100	69,3	40	FT15 . 808055...	820,80	**00593**
PSC-63-100-FT15 555555	PSC 63	100	69,6	40	FT15 . 555555...	820,80	**00393**
PSC-63-125-FT15 353535	PSC 63	125	94,4	65	FT15 . 353535...	833,50	**00293**
PSC-63-125-FT15 808055	PSC 63	125	94,3	65	FT15 . 808055...	833,50	**00693**
PSC-63-125-FT15 555555	PSC 63	125	94,6	65	FT15 . 555555...	833,50	**00493**

Key D

Clamping screw

Spare parts		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
Adapter						
PSC 63	T20 - IP	12,62	**121**	M4,5x18 - IP	11,08	**25900**

FT17 . 808080...

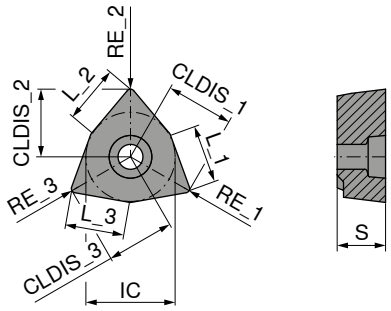

Designation	IC	CLDIS_1	L_1	CLDIS_2	L_2	CLDIS_3	L_3	S
	mm	mm	mm	mm	mm	mm	mm	mm
FT17 M 808080R04-MMM	17	13,00	11,3	13,00	11,3	13,00	11,3	9,14
FT17 M 808080R08-MMM	17	12,78	11,3	12,78	11,3	12,78	11,3	9,14
FT17 M 808080R12-MMM	17	12,56	11,2	12,56	11,2	12,56	11,3	9,14

ISO	RE_1	RE_2	RE_3	CTCP125		CTPM125	
	mm	mm	mm	DRAGONSKIN		DRAGONSKIN	
							
				M M M		M M M	
				FT17 . 808080...		FT17 . 808080...	
				74 000 ...		74 000 ...	
				EUR FW		EUR FW	
FT17 M 808080R04-MMM	0,4	0,4	0,4	32,66	**00200**		
FT17 M 808080R08-MMM	0,8	0,8	0,8	32,66	**00400**	32,66	**10400**
FT17 M 808080R12-MMM	1,2	1,2	1,2	32,66	**00600**		
P				●		○	
M						●	
K				○			
N							
S							
H							
O							

→ v_c Page 29

10

FreeTurn – HSK-T tool holder FT17

▲ Tool holder for FreeTurn indexable insert
▲ DirectCooling coolant supply

Scope of supply:

Toolholder with one clamping screw and one screwdriver



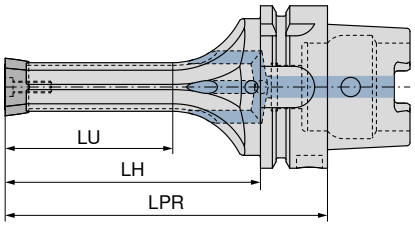

ISO designation	Adapter	LPR mm	LH mm	LU mm	Insert	DirectCooling 74 701 ... EUR FT	
HSK-T63-100-FT17 808080	HSK-T 63	100	74	40	FT17 . 808080...	707,00	**00737**
HSK-T63-125-FT17 808080	HSK-T 63	125	99	65	FT17 . 808080...	719,70	**00837**

Key D

Clamping screw

Spare parts		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
Adapter						
HSK-T 63	T20 - IP	12,62	**121**	M4,5x18 - IP	11,08	**25900**

FreeTurn – PSC tool holder FT17

▲ Tool holder for FreeTurn indexable insert
▲ DirectCooling coolant supply

Scope of supply:

Toolholder with one clamping screw and one screwdriver



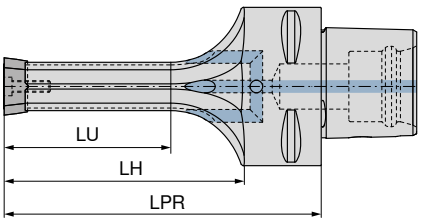

ISO designation	Adapter	LPR mm	LH mm	LU mm	Insert	DirectCooling 74 701 ... EUR FT	
PSC-63-100-FT17 808080	PSC 63	100	69,3	40	FT17 . 808080...	820,80	**00793**
PSC-63-125-FT17 808080	PSC 63	125	94,3	65	FT17 . 808080...	833,50	**00893**

Key D

Clamping screw

Spare parts		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
Adapter						
PSC 63	T20 - IP	12,62	**121**	M4,5x18 - IP	11,08	**25900**

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values for EcoCut

Index	EcoCut Mini CTWN425	DRAGONSKIN EcoCut Mini CTPP435	DRAGONSKIN EcoCut Classic CTCP425-P	DRAGONSKIN EcoCut Classic CTCP435-P	DRAGONSKIN EcoCut Classic CTPP430	EcoCut Classic H210T	EcoCut Classic H216T	DRAGONSKIN EcoCut ProfileMaster CTPP430
	v_c in m/min							
P.1.1		145	270	230	180			170
P.1.2		125	235	200	155			140
P.1.3		105	200	165	130			115
P.1.4		100	190	155	125			105
P.1.5		90	175	140	110			95
P.2.1		130	240	200	160			145
P.2.2		100	185	155	120			105
P.2.3		90	175	140	110			95
P.2.4		70	130	105	80			60
P.3.1		105	185	160	115			110
P.3.2		70	135	110	85			75
P.3.3		30	80	60	55			40
P.4.1		105	185	160	115			110
P.4.2		85	160	130	100			95
M.1.1		105	160	160	115			110
M.2.1		65			85			75
M.3.1		95			110			100
K.1.1	140	140	205	185	160	110	170	180
K.1.2	115	120	205	185	140	90	130	260
K.2.1	150	140	200	180	160	120	180	160
K.2.2	110	120	200	180	140	85	130	250
K.3.1	170	150	195	175	125	140	190	130
K.3.2	140	125	195	175	110	110	160	230
N.1.1	300	40			40	40	60	300
N.1.2	50	290			290	290	310	200
N.2.1	300	290			290	290	60	300
N.2.2	300	190			190	190	460	200
N.2.3	450	340			340	340	60	150
N.3.1	350	240			240	240	460	300
N.3.2	350	240			240	240	460	300
N.3.3	250	190			190	190	360	200
N.4.1	200	140			140	140	260	200
S.1.1	40	35		35	55	35	45	35
S.1.2	30	30		30	55	25	35	30
S.2.1	30	20		20	55	25	35	20
S.2.2	25	15		15	55	20	25	15
S.2.3	20	15		15	55	20	20	15
S.3.1	90	85		85	70	65	110	85
S.3.2	55	40		40	60	45	70	40
S.3.3	40	30		30	40	30	50	30
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1	130	110			110	110	155	130
O.1.2								
O.2.1	105	95			95	95	140	105
O.2.2								
O.3.1								

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values for FreeTurn

Index	F		M		-28P
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	
	CTCP125	CTPM125	CTCP125	CTPM125	H216T
	v_c in m/min				
P.1.1	**295**	205	**295**	205	
P.1.2	**255**	170	**255**	170	
P.1.3	**215**	140	**215**	140	
P.1.4	**200**	130	**200**	130	
P.1.5	**180**	120	**180**	120	
P.2.1	**260**	175	**260**	175	
P.2.2	**195**	130	**195**	130	
P.2.3	**180**	120	**180**	120	
P.2.4	**130**	80	**130**	80	
P.3.1	**170**	140	**170**	140	
P.3.2	**105**	95	**105**	95	
P.3.3	**45**	50	**45**	50	
P.4.1	**170**	140	**170**	140	
P.4.2	**140**	120	**140**	120	
M.1.1		**140**		**140**	
M.2.1		**100**		**100**	
M.3.1		**130**		**130**	
K.1.1	170		170		170
K.1.2	160		160		130
K.2.1	180		180		180
K.2.2	160		160		130
K.3.1	200		200		190
K.3.2	160		160		160
N.1.1					**1650**
N.1.2					**1350**
N.2.1					**1200**
N.2.2					**1100**
N.2.3					**600**
N.3.1					**525**
N.3.2					**500**
N.3.3					**375**
N.4.1					**275**
S.1.1					45
S.1.2					35
S.2.1					35
S.2.2					25
S.2.3					20
S.3.1					110
S.3.2					70
S.3.3					50
H.1.1					
H.1.2					
H.1.3					
H.1.4					
H.2.1					
H.3.1					
O.1.1					160
O.1.2					
O.2.1					140
O.2.2					
O.3.1					

10

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Depth of Cut and Feedrate for EcoCut Mini

Turning

2.25xD



EcoCut Mini Size	Depth of Cut a_p in mm									
	0,25	0,5	0,75	1,0	1,5	2,0	2,5	3,0	3,5	4,0
	Feed rate f in mm/rev.									
ECM 02..	0,02–0,07	0,02–0,07								
ECM 02,5..	0,02–0,07	0,02–0,07	0,02–0,05							
ECM 03..	0,02–0,07	0,02–0,07	0,02–0,05	0,02–0,05						
ECM 03,5..	0,02–0,07	0,02–0,07	0,02–0,05	0,02–0,05	0,02–0,05					
ECM 04..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,07	0,01–0,05				
ECM 05..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,08	0,02–0,06	0,01–0,04			
ECM 06..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,08	0,02–0,06	0,01–0,04		
ECM 07..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,08	0,02–0,06	0,01–0,04	
ECM 08..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,08	0,02–0,06	0,01–0,04

4xD

EcoCut Mini Size	Depth of Cut a_p in mm									
	0,25	0,5	0,75	1,0	1,5	2,0	2,5	3,0	3,5	4,0
	Feed rate f in mm/rev.									
ECM 02..	0,02–0,05	0,01–0,05								
ECM 02,5..	0,02–0,05	0,01–0,05								
ECM 03..	0,02–0,05	0,02–0,05	0,01–0,05							
ECM 03,5..	0,02–0,05	0,02–0,05	0,02–0,05	0,01–0,05						
ECM 04..	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,08	0,01–0,05					
ECM 05..	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,085	0,02–0,06	0,01–0,04				
ECM 06..	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,085	0,02–0,06	0,01–0,04				
ECM 07..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,03–0,08	0,02–0,06	0,01–0,04			
ECM 08..	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,1	0,04–0,095	0,03–0,08	0,02–0,06	0,01–0,04		

Face turning



EcoCut Mini Size	2,25xD		4xD	
	$a_{p\,max.}$ in mm	f in mm/rev.	$a_{p\,max.}$ in mm	f in mm/rev.
ECM 02..	0,30	0,01–0,05	0,30	0,01–0,03
ECM 02,5..	0,30	0,01–0,05	0,30	0,01–0,03
ECM 03..	0,50	0,01–0,06	0,50	0,01–0,04
ECM 03,5..	0,50	0,01–0,06	0,50	0,01–0,04
ECM 04..	0,70	0,03–0,07	0,70	0,02–0,05
ECM 05..	0,70	0,03–0,07	0,70	0,02–0,05
ECM 06..	0,70	0,03–0,07	0,70	0,02–0,05
ECM 07..	1,00	0,04–0,08	1,00	0,03–0,06
ECM 08..	1,00	0,04–0,08	1,00	0,03–0,06

Depth of Cut and Feedrate for EcoCut Mini

Drilling

Feed rate



EcoCut Mini Size	2,25xD	4xD
	f in mm/rev.	f in mm/rev.
ECM 02..	0,0025–0,0075	0,0025–0,005
ECM 02,5..	0,0025–0,010	0,0025–0,005
ECM 03..	0,0025–0,0125	0,0025–0,010
ECM 03,5..	0,0025–0,0150	0,0025–0,010
ECM 04..	0,005–0,030	0,005–0,0125
ECM 05..	0,005–0,030	0,005–0,015
ECM 06..	0,005–0,030	0,005–0,020
ECM 07..	0,005–0,035	0,005–0,025
ECM 08..	0,005–0,040	0,005–0,030

max. bore depth

EcoCut Mini Size	2,25xD	4xD
	Max. hole depth in mm	Max. hole depth in mm
ECM 02..	4,50	8,0
ECM 02,5..	5,63	10,0
ECM 03..	6,75	12,0
ECM 03,5..	7,88	14,0
ECM 04..	9,0	16,0
ECM 05..	11,25	20,0
ECM 06..	13,5	24,0
ECM 07..	15,75	28,0
ECM 08..	18,0	32,0

Depth of Cut and Feedrate for EcoCut Classic

Turning

1.5xD



EcoCut Classic Size	Depth of Cut a_p in mm											
	1	2	3	4	5	6	7	8	9	10	12	14
	Feed rate f in mm/rev.											
ECC 08	0,06–0,12	0,06–0,12	0,04–0,10	0,02–0,08								
ECC 10	0,07–0,15	0,07–0,15	0,05–0,13	0,04–0,11	0,02–0,09							
ECC 12	0,08–0,16	0,08–0,16	0,08–0,16	0,06–0,14	0,04–0,12	0,02–0,10						
ECC 14	0,09–0,18	0,09–0,18	0,09–0,18	0,09–0,18	0,07–0,16	0,05–0,14	0,02–0,11					
ECC 16	0,10–0,20	0,10–0,20	0,10–0,20	0,10–0,20	0,08–0,18	0,06–0,16	0,04–0,14	0,02–0,12				
ECC 18	0,11–0,22	0,11–0,22	0,11–0,22	0,11–0,22	0,11–0,22	0,09–0,20	0,07–0,18	0,05–0,16	0,03–0,13			
ECC 20	0,12–0,24	0,12–0,24	0,12–0,24	0,12–0,24	0,12–0,24	0,11–0,23	0,09–0,21	0,07–0,19	0,05–0,17	0,03–0,15		
ECC 25	0,13–0,26	0,13–0,26	0,13–0,26	0,13–0,26	0,13–0,26	0,13–0,26	0,13–0,26	0,11–0,24	0,09–0,22	0,07–0,20	0,03–0,16	
ECC 32	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,14–0,30	0,15–0,30	0,15–0,30	0,13–0,28	0,11–0,26	0,07–0,22	0,03–0,18

Feed f may be increased by 50–75 % when using -M50Q and -27Q.

2.25xD

EcoCut Classic Size	Depth of Cut a_p in mm										
	1,0	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	7,0
	Feed rate f in mm/rev.										
ECC 08	0,06–0,12	0,04–0,10	0,02–0,08								
ECC 10	0,07–0,15	0,05–0,13	0,03–0,11	0,02–0,09							
ECC 12	0,08–0,16	0,08–0,16	0,06–0,14	0,04–0,12	0,02–0,10						
ECC 14	0,09–0,18	0,09–0,18	0,07–0,16	0,05–0,14	0,04–0,13	0,02–0,11					
ECC 16	0,10–0,20	0,10–0,20	0,09–0,19	0,07–0,17	0,05–0,15	0,03–0,13					
ECC 18	0,11–0,22	0,11–0,22	0,11–0,22	0,09–0,20	0,07–0,18	0,05–0,16	0,03–0,14				
ECC 20	0,12–0,24	0,12–0,24	0,12–0,24	0,12–0,24	0,10–0,22	0,08–0,20	0,06–0,18	0,04–0,16			
ECC 25	0,13–0,26	0,13–0,26	0,13–0,26	0,13–0,26	0,13–0,26	0,12–0,25	0,10–0,23	0,08–0,21	0,06–0,19	0,04–0,17	
ECC 32	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,14–0,29	0,12–0,27	0,10–0,25	0,08–0,23	0,05–0,20

Feed f may be increased by 50–75 % when using -M50Q and -27Q.

3xD

EcoCut Classic Size	Depth of Cut a_p in mm								
	1,0	2,0	2,5	3,0	3,5	4,0	5,0	6,0	7,0
	Feed rate f in mm/rev.								
ECC 08	0,05–0,10	0,02–0,06							
ECC 10	0,06–0,11	0,03–0,07							
ECC 12	0,06–0,12	0,04–0,10	0,02–0,08						
ECC 14	0,07–0,13	0,05–0,11	0,02–0,09						
ECC 16	0,07–0,15	0,06–0,14	0,04–0,12	0,02–0,09					
ECC 18	0,08–0,16	0,08–0,16	0,06–0,14	0,04–0,12					
ECC 20	0,09–0,18	0,09–0,18	0,09–0,18	0,07–0,16	0,05–0,14	0,03–0,12			
ECC 25	0,10–0,19	0,10–0,19	0,10–0,19	0,08–0,17	0,06–0,15	0,03–0,13			
ECC 32	0,11–0,22	0,11–0,22	0,11–0,22	0,11–0,22	0,09–0,20	0,07–0,18	0,03–0,14		

Depth of Cut and Feedrate for EcoCut Classic

Face turning



EcoCut Classic Size	1,5xD		2,25xD		3xD	
	a_p in mm	f in mm/rev.	a_p in mm	f in mm/rev.	a_p in mm	f in mm/rev.
ECC 08	2,00	0,05–0,10	1,90	0,04–0,09	1,10	0,04–0,07
ECC 10	2,50	0,06–0,12	2,20	0,05–0,10	1,20	0,04–0,09
ECC 12	3,00	0,07–0,14	2,60	0,06–0,12	1,40	0,05–0,11
ECC 14	3,50	0,08–0,16	3,00	0,07–0,14	1,60	0,06–0,12
ECC 16	4,00	0,09–0,18	3,40	0,08–0,16	1,90	0,06–0,13
ECC 18	4,50	0,10–0,20	3,80	0,09–0,18	2,00	0,07–0,14
ECC 20	5,00	0,11–0,22	4,20	0,10–0,20	2,20	0,08–0,15
ECC 25	6,00	0,12–0,24	5,00	0,11–0,22	2,60	0,09–0,18
ECC 32	8,00	0,13–0,27	6,00	0,12–0,25	3,00	0,10–0,20

Drilling

Feed rate



EcoCut Classic Size	1,5xD	2,25xD	3xD
	f in mm/rev.	f in mm/rev.	f in mm/rev.
ECC 08	0,01–0,04	0,01–0,04	0,01–0,02
ECC 10	0,01–0,05	0,01–0,05	0,01–0,03
ECC 12	0,01–0,05	0,01–0,05	0,01–0,04
ECC 14	0,01–0,07	0,01–0,07	0,01–0,05
ECC 16	0,02–0,08	0,02–0,08	0,02–0,06
ECC 18	0,03–0,09	0,03–0,09	0,03–0,07
ECC 20	0,03–0,10	0,03–0,10	0,03–0,08
ECC 25	0,03–0,12	0,03–0,12	0,04–0,09
ECC 32	0,05–0,15	0,05–0,15	0,05–0,11

10

max. bore depth



EcoCut Classic Size	1,5xD	2,25xD	3xD
	Max. hole depth in mm	Max. hole depth in mm	Max. hole depth in mm
ECC 08	12,0	18,0	24,0
ECC 10	15,0	22,5	30,0
ECC 12	18,0	27,0	36,0
ECC 14	21,0	31,5	42,0
ECC 16	24,0	36,0	48,0
ECC 18	27,0	40,5	54,0
ECC 20	30,0	45,0	60,0
ECC 25	37,5	56,5	75,0
ECC 32	48,0	72,0	96,0

Depth of Cut and Feedrate for EcoCut ProfileMaster 90°

Turning

1,5xD



EcoCut ProfileMaster Size	Depth of Cut a_p in mm							
	1	2	3	4	5	6	7	8
	Feed rate f in mm/rev.							
EC PM 10	0,07–0,20	0,05–0,17	0,02–0,12					
EC PM 12	0,07–0,20	0,05–0,17	0,02–0,12					
EC PM 16	0,10–0,25	0,07–0,23	0,05–0,21	0,02–0,17				
EC PM 20	0,12–0,27	0,10–0,26	0,007–0,24	0,05–0,20	0,02–0,14			
EC PM 25	0,15–0,30	0,15–0,30	0,13–0,28	0,10–0,26	0,05–0,22	0,02–0,18		
EC PM 32	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,10–0,27	0,07–0,24	0,05–0,21	0,02–0,15

2,25xD

EcoCut ProfileMaster Size	Depth of Cut a_p in mm							
	1	2	3	4	5	6	7	8
	Feed rate f in mm/rev.							
EC PM 10	0,07–0,19	0,02–0,13						
EC PM 12	0,07–0,19	0,02–0,13						
EC PM 16	0,10–0,25	0,07–0,21	0,02–0,13					
EC PM 20	0,12–0,27	0,07–0,24	0,05–0,19					
EC PM 25	0,15–0,30	0,10–0,27	0,07–0,23	0,02–0,15				
EC PM 32	0,15–0,30	0,15–0,30	0,10–0,27	0,07–0,23	0,02–0,15			

Face turning

1.5xD and 2.25xD



EcoCut ProfileMaster Size	Depth of Cut a_p in mm					
	1,0	1,5	2,0	2,5	3,0	3,5
	Feed rate f in mm/rev.					
EC PM 10	0,02–0,15	0,02–0,15				
EC PM 12	0,02–0,15	0,02–0,15				
EC PM 16	0,05–0,20	0,05–0,20	0,05–0,20			
EC PM 20	0,08–0,22	0,08–0,22	0,08–0,22	0,08–0,22		
EC PM 25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	
EC PM 32	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25

Internal + external – radial grooving



EcoCut ProfileMaster Size	1,5xD
	f in mm/rev.
EC PM 10	0,01–0,08
EC PM 12	0,02–0,10
EC PM 16	0,04–0,15
EC PM 20	0,04–0,16
EC PM 25	0,07–0,20
EC PM 32	0,08–0,22

EcoCut ProfileMaster Size	2,25xD
	f in mm/rev.
EC PM 10	0,01–0,08
EC PM 12	0,02–0,10
EC PM 16	0,04–0,15
EC PM 20	0,04–0,16
EC PM 25	0,07–0,20
EC PM 32	0,08–0,22

Drilling

Feed and max. hole depth



EcoCut ProfileMaster Size	1,5xD	
	f in mm/rev.	Max. hole depth in mm
EC PM 10	0,01–0,05	15,0
EC PM 12	0,01–0,06	18,0
EC PM 16	0,02–0,09	24,0
EC PM 20	0,03–0,10	30,0
EC PM 25	0,04–0,12	37,5
EC PM 32	0,04–0,14	48,0

EcoCut ProfileMaster Size	2,25xD	
	f in mm/rev.	Max. hole depth in mm
EC PM 10	0,01–0,05	22,5
EC PM 12	0,01–0,06	27,0
EC PM 16	0,02–0,09	36,0
EC PM 20	0,03–0,10	45,0
EC PM 25	0,04–0,12	56,3
EC PM 32	0,04–0,14	72,0

Depth of Cut and Feedrate for EcoCut ProfileMaster 0°

EcoCut ProfileMaster Sizes 10 and 12 can not be used as 0° version.

Turning

1,5xD



EcoCut ProfileMaster Size	Depth of cut a_p in mm					
	1,0	1,5	2,0	2,5	3,0	3,5
	Feed rate f in mm/rev.					
EC PM 16	0,04–0,20	0,04–0,20	0,04–0,20			
EC PM 20	0,06–0,22	0,06–0,22	0,06–0,22	0,06–0,22		
EC PM 25	0,08–0,25	0,08–0,25	0,08–0,25	0,08–0,25	0,08–0,25	
EC PM 32	0,10–0,28	0,10–0,28	0,10–0,28	0,10–0,28	0,10–0,28	0,10–0,28

2,25xD

EcoCut ProfileMaster Size	Depth of cut a_p in mm					
	1,0	1,5	2,0	2,5	3,0	3,5
	Feed rate f in mm/rev.					
EC PM 16	0,04–0,20	0,04–0,20	0,04–0,20			
EC PM 20	0,06–0,22	0,06–0,22	0,06–0,22	0,06–0,22		
EC PM 25	0,08–0,25	0,08–0,25	0,08–0,25	0,08–0,25	0,08–0,25	
EC PM 32	0,10–0,28	0,10–0,28	0,10–0,28	0,10–0,28	0,10–0,28	0,10–0,28

Face turning

1,5xD



EcoCut ProfileMaster Size	Depth of cut a_p in mm						
	1,0	1,5	2,0	2,5	3,0	3,5	4,0
	Feed rate f in mm/rev.						
EC PM 16	0,05–0,20	0,05–0,20	0,05–0,20				
EC PM 20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20			
EC PM 25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25		
EC PM 32	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25

2,25xD

EcoCut ProfileMaster Size	Depth of cut a_p in mm						
	1,0	1,5	2,0	2,5	3,0	3,5	4,0
	Feed rate f in mm/rev.						
EC PM 16	0,05–0,20	0,05–0,20	0,05–0,20				
EC PM 20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20			
EC PM 25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25		
EC PM 32	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25

Axial grooving external + internal



EcoCut ProfileMaster Size	1,5xD
	Feed rate f in mm/rev.
EC PM 16	0,02–0,12
EC PM 20	0,04–0,14
EC PM 25	0,06–0,18
EC PM 32	0,08–0,20

EcoCut ProfileMaster Size	2,25xD
	Feed rate f in mm/rev.
EC PM 16	0,02–0,12
EC PM 20	0,04–0,14
EC PM 25	0,06–0,18
EC PM 32	0,08–0,20

Initial curves for FreeTurn

	Material				Inserts		v_c in m/min	Cooling
Steel	1.7225	42CrMo4	1010 N/mm²	P.2.3	FT1x M 80xxxxR08 -M	CTCP125	200	Emulsion
Stainless steel	1.4301	X5CrNi18-10	610 N/mm²	M.1.1	FT1x M 80xxxxR08 -M	CTPM125	140	Emulsion
Non-ferrous metals	3.2341	G-AlSi 5 Mg	200 N/mm²	N2.2	FT1x G 35xxxxR08-28P	H210T	1100	Emulsion

Steel

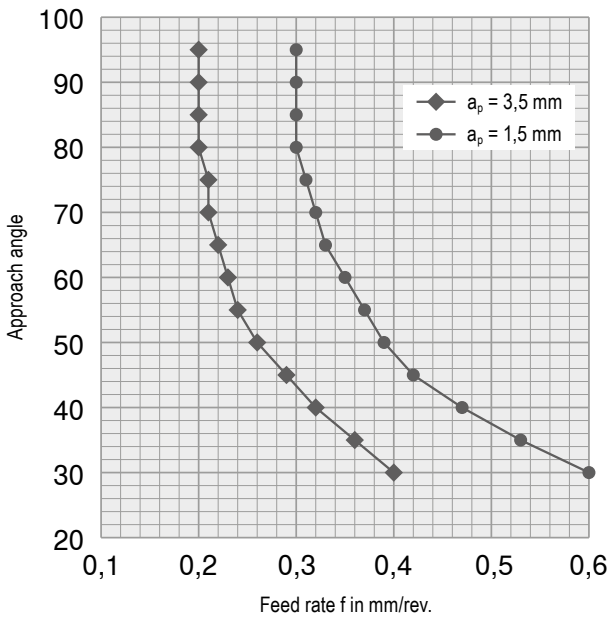

Stainless steel

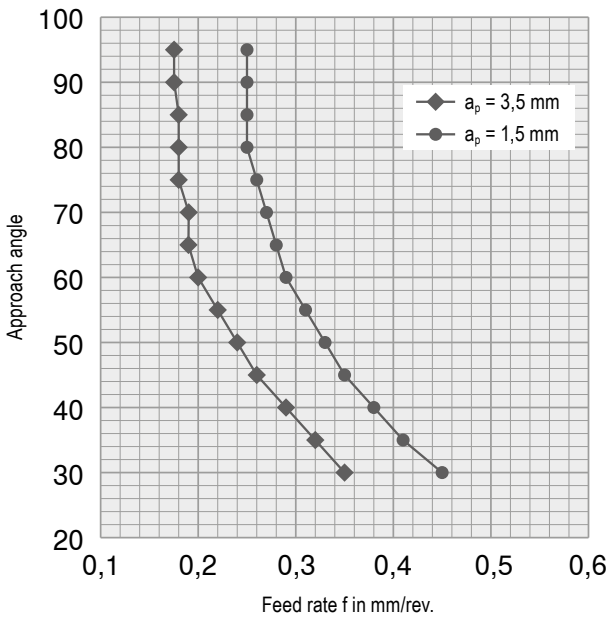

Non-ferrous metals

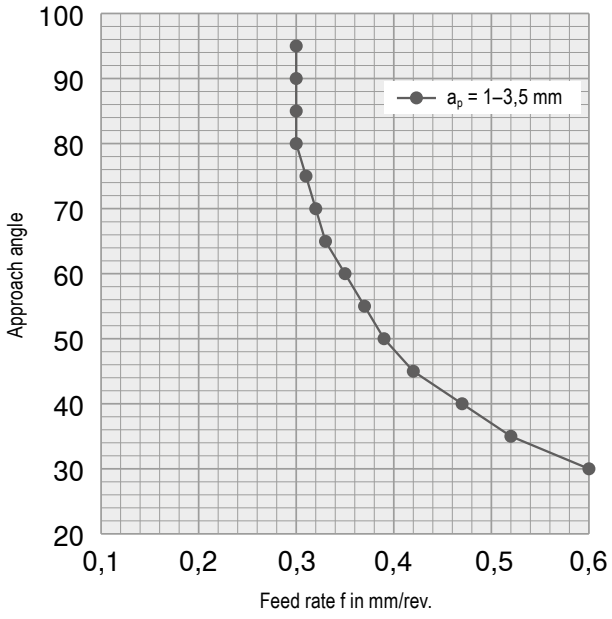

Chip Breakers Overview

EcoCut Classic

	Model	Smooth cut ○	Irregular cutting depth ◔	Interrupted cut ◌	Sectional illustration f mm
-EN ▲ Universal geometry ▲ Excellent chip breakage ▲ Positive cutting edge ▲ Low to medium feeds		**CTCP425-P** **CTCP425-P / CTPP430** CTCP425-P CTPP430 CTCP435-P / CTPP430 CTCP435-P / CTPP430	**CTCP435-P / CTPP430** **CTPP430** CTCP435-P / CTPP430 CTPP430 CTCP435-P / CTPP430 CTCP435-P / CTPP430	**CTPP430 / CTCP435-P** **CTPP430** CTCP435-P CTPP430 CTCP435-P CTCP435-P	 0,05–0,275
-M50Q ▲ With wiper geometry ▲ Excellent surface qualities ▲ Good chip formation ▲ Medium to high feeds		**CTCP425-P** CTCP425-P CTCP425-P	**CTCP425-P** CTCP425-P		 0,2–0,425
-27P ▲ Positive cutting edge ▲ Periphery ground ▲ Polished rake face ▲ First choice for non-ferrous metals		**H216T** **H216T** H216T H216T	**H216T** **H216T** H216T H216T	**H216T** **H216T** 	 0,1–0,4
-27Q ▲ With wiper geometry ▲ Extremely positive geometry ▲ Periphery ground ▲ Low adhesion		H210T **H210T** **H210T** H210T	H210T **H210T** **H210T** H210T		 0,2–0,5

EcoCut ProfileMaster

	Model				
-M20 ▲ Positive geometry ▲ Universal application ▲ Low to medium feeds		**CTPP430** **CTPP430** CTPP430 CTPP430 **CTPP430** CTPP430	**CTPP430** **CTPP430** CTPP430 CTPP430 **CTPP430** CTPP430	**CTPP40** **CTPP430** CTPP430 CTPP430 CTPP430	 0,05–0,25

Application area of -EN and -M50Q chip breakers

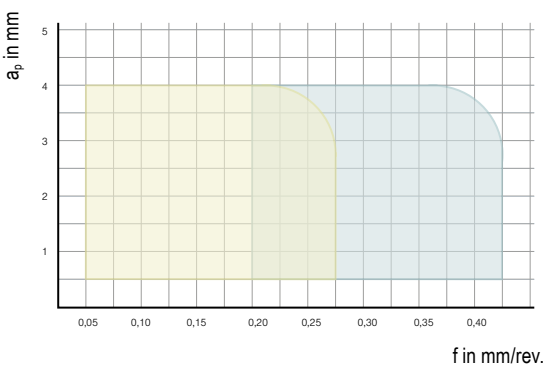

EcoCut Classic 2.25xD – ECC16 – XCNT 080304

= -M50Q

= Standard

10

Chip Breakers Overview

FreeTurn

	Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration
					f mm
-F ▲ Traditional finishing geometry ▲ High surface quality ▲ First choice for finishing steel		**CTCP125** CTCP125 	**CTCP125** CTCP125 	 	 0–6
-M ▲ Average to rough machining ▲ Aggressive chip breaker		CTPM125 **CTPM125** 	CTPM125 **CTPM125** 	 	 0–6
-28P ▲ Traditional finishing geometry ▲ Sharp cutting edge ▲ First choice for aluminium		 H216T **H216T** H216T H216T	 H216T **H216T** H216T H216T	 H216T **H216T** 	 0–1,8

EcoCut Classic – Application as the most stable boring tool

EcoCut can be used not only as a multifunctional tool. In comparison with a boring bar EcoCut used as a pure boring tool gives the user enormous benefits.

Example: machining bores, 16 mm diameter by 36 mm depth

Differences in the tool

Boring Bar

A12K SCFCR 06

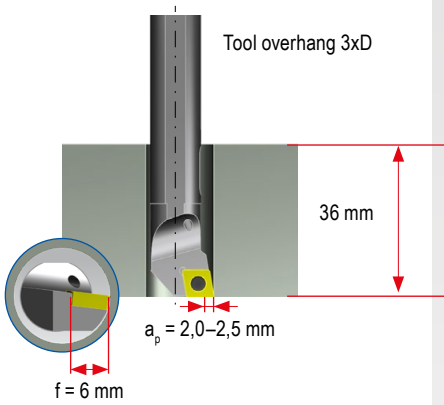

EcoCut Classic

ECC 16R-2.25D 08

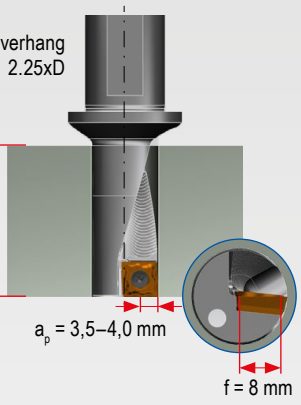

Your Advantages

Large, stable toolholder
- Absorption of high cutting forces
- Low vibration
- Chip Booster for perfect cooling and chip evacuation

Benefits
- High surface quality
- Perfect chip control
- Max. process security

Differences in the insert

CCMT 060204

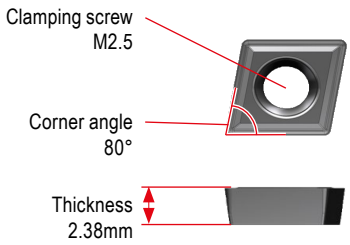

XCNT 080304

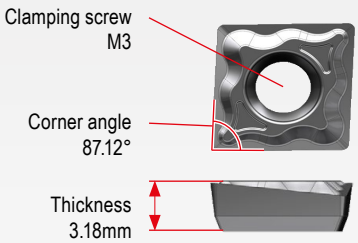

Large and stable insert
- Increased process security
- Enables large depths of cut
- Higher cutting data
- Higher tool life

Benefits
- Reduction in machining time
- Increased productivity
- Reduced tooling costs

Stability Comparison

Calculation using FEM
A load of 1000 N on the insert seat corresponds to an approx. a_p of 2.0 mm and f 0.2 mm

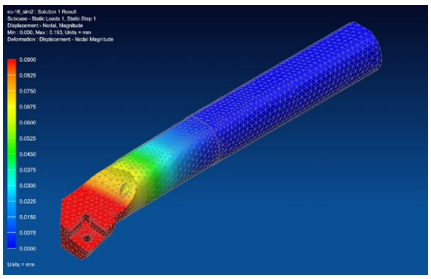

Deflection 0.19mm

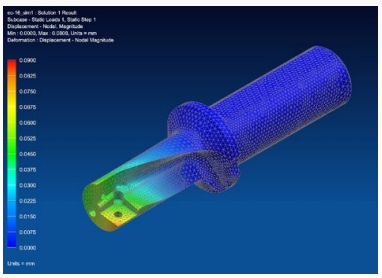

Deflection 0.08mm

Practical experience shows:

- Reduced machining time by up to **75 %**
- Increase in tool life by **400 %** possible

Innovative chip removal – Chip-Booster

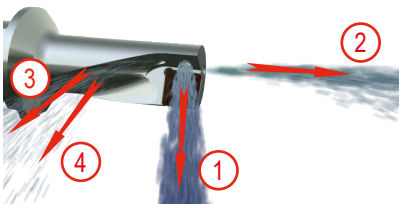

EcoCut tools are equipped with a unique coolant and chip removal system.

1. Cooling of the indexable insert
2. General coolant stream
3. Chip booster for improved chip transport
4. Chip booster prevents chips from getting stuck between tool and workpiece

For maximum chip transport efficiency when drilling, coolant pressure must be 3–6 bar minimum (optimal 7–10 bar).

10

Application Tips

Drilling Off centre

Due to the special construction of the EcoCut tool and insert, off-centre drilling is possible.
Deviations from the tool nominal Ø, can be achieved (see adjacent table).

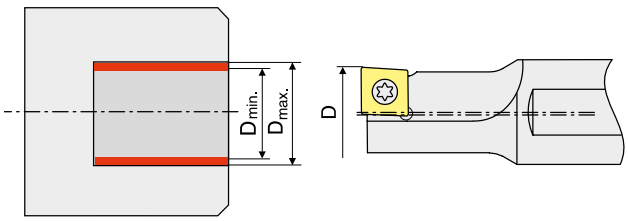



ProfileMaster 0°
Not suitable for drilling!

EcoCut Mini	Tool nominal-Ø	Work piece bore Ø	
	D in mm	$D_{min.}$ in mm	$D_{max.}$ in mm
ECM 02 L/R - ...D	2	1,95	2,1
ECM 02,5 L/R - ...D	2,5	2,45	2,6
ECM 03 L/R - ...D	3	2,95	3,15
ECM 03,5 L/R - ...D	3,5	3,45	3,65
ECM 04 R/L - ...D	4	3,90	4,20
ECM 05 R/L - ...D	5	4,90	5,20
ECM 06 R/L - ...D	6	5,90	6,20
ECM 07 R/L - ...D	7	6,90	7,20
ECM 08 R/L - ...D	8	7,90	8,20

EcoCut Classic	Tool nominal-Ø	Work piece bore Ø	
	D in mm	$D_{min.}$ in mm	$D_{max.}$ in mm
ECC 08 R/L - ... 04	8	7,85	8,30
ECC 10 R/L - ... 05	10	9,85	10,50
ECC 12 R/L - ... 06	12	11,85	12,50
ECC 14 R/L - ... 07	14	13,85	14,50
ECC 16 R/L - ... 08	16	15,85	16,50
ECC 18 R/L - ... 09	18	17,85	18,50
ECC 20 R/L - ... 10	20	19,80	20,50
ECC 25 R/L - ... 13	25	24,80	25,80
ECC 32 R/L - ... 17	32	31,80	33,00

EcoCut ProfileMaster	Tool nominal-Ø	Work piece bore Ø	
	D in mm	$D_{min.}$ in mm	$D_{max.}$ in mm
PM 10R/L ...	10	9,85	12
PM 12R/L ...	12	11,85	15
PM 16R/L ...	16	15,85	19
PM 20R/L ...	20	19,80	24
PM 25R/L ...	25	24,80	29
PM 32R/L ...	32	31,80	38

Machining over centre

Problem

In case of insufficient movement of the machine across the centre line, the external diameter can not be machined with the same tool.

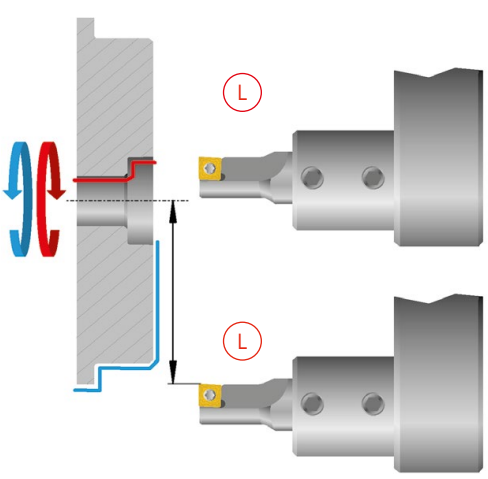

Solution

Use a right hand EcoCut tool.

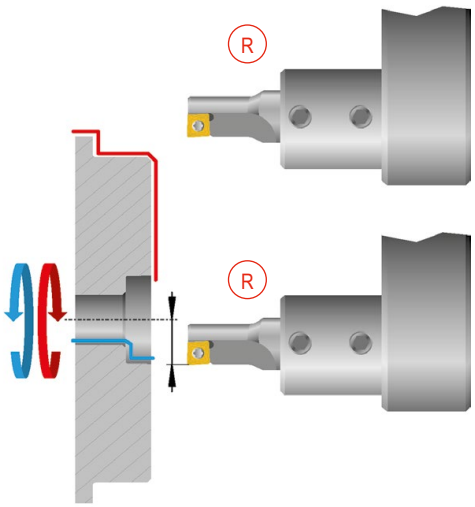

Application Tips

With axial displacement there is the danger of collision!

Problems

Displacement in x-direction:



Angular error:



Turret position error:



Remedy

When pre-setting the tool:

▲ Definition as an internal turning tool for programming



▲ Enter the tool nominal Ø as bore target Ø

At the machine:

▲ Make measuring cut, approx. 3 mm deep

▲ Measure drilled diameter produced



▲ If necessary correct drilling Ø

▲ Start machining

10

EcoCut Mini adapter – Design

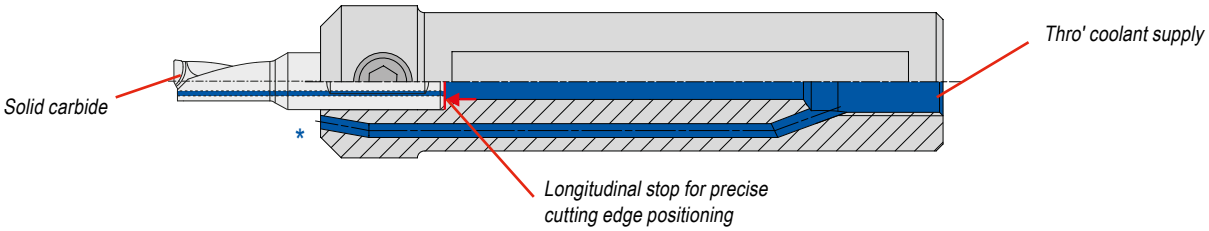

* Cross-section rotated by 90° for clarity

Mounting of the insert for EcoCut Classic

For tools up to Ø 8 mm right and left handed inserts are required.
From Ø 10-32 mm neutral inserts are used.

Note!
Ensure correct installation position.

EcoCut ProfileMaster – the highlight with regard to efficiency



Right hand tool

right hand insert



Right hand tool

left hand insert

right hand insert



Left hand tool

Right hand tool

right hand insert

Version 90°



Drilling into solid material with flat bottom hole

Boring



Turning External Diameters

Turning Internal Diameters



Turning Profiles



External radial grooving

Internal radial grooving

Version 0°



Turning External Diameters

Turning Internal Diameters



Turning Profiles



Axial grooving external

Axial grooving internal

For maximum chip transport efficiency when drilling, coolant pressure must be 3–6 bar minimum (optimal 7–10 bar).

EcoCut ProfileMaster – Axial Grooving

0° (from Ø 16 mm)

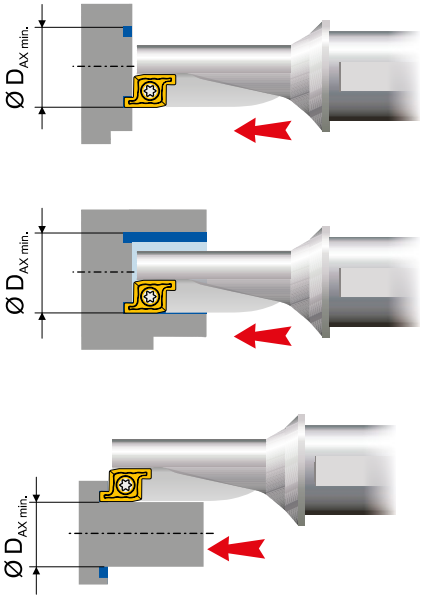

90°

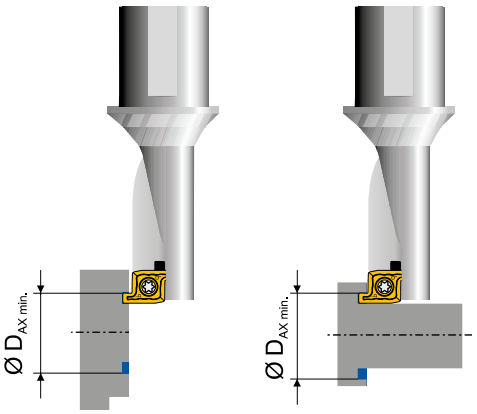

EcoCut ProfileMaster	$ØD_{noml.}$ mm	$ØD_{AX\ min.}$ mm	$ØD_{AX\ max.}$ mm
PM 10R/L 1,5D	10	10	> 10
PM 10R/L 2,25D	10	10	> 10
PM 12R/L 1,5D	12	12	> 12
PM 12R/L 2,25D	12	12	> 12
PM 16R/L 1,5D	16	16	> 16
PM 16R/L 2,25D	16	16	> 16
PM 20R/L 1,5D	20	20	> 20
PM 20R/L 2,25D	20	20	> 20
PM 25R/L 1,5D	25	25	> 25
PM 25R/L 2,25D	25	25	> 25
PM 32R/L 1,5D	32	32	> 32
PM 32R/L 2,25D	32	32	> 32



$ØD_{noml.}$ = Nominal tool diameter

$ØD_{AX\ min.}$ = smallest diameter for axial grooving

$ØD_{AX\ max.}$ = largest diameter for axial grooving

$ØD_{AX\ min.} = ØD_{noml.}$

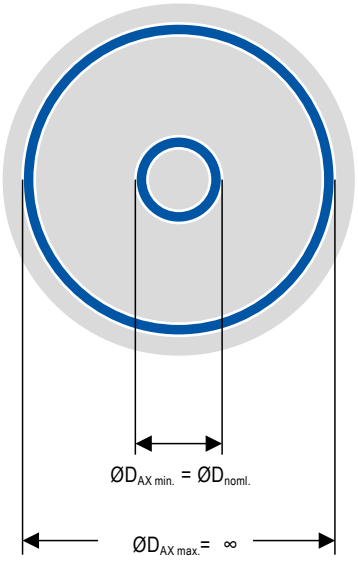

10

Application Tips

Recommendation for Optimum Results

Type of problem										
Type of wear				Work piece problems		Swarf control				
Edge breakage	Built-up edge	Wear on clearance face	Plastic deformation	Vibration	Surface quality	Chip too long (snarl chip)	Chip too short (fragmented chip)	Remedy measures		
	↑	↓	↓	↓	↑	↓		Cutting data	Cutting speed	
↓		~	↓	↑	↓	↑	↓		Feed rate	
↑		↑	↑	↓	↑			Insert selection	Corner radius	larger ↑ ↓ smaller
↓		↑	↑						Tool Material	Wear resistance ↑ ↓ toughness
~				~	~			General criteria	Tool clamping	
~				~	~				Work piece clamping	
~				~	↓				Overhang	
~		~		~	~				Tip height	
	●	●	●		●	●			Cooling lubricant	

↑ raise, increase large influence
↑ raise, increase small influence
↓ avoid, reduce large influence
↓ avoid, reduce small influence
~ control, optimize
● use

Factors influencing the selection of the correct cutting angle

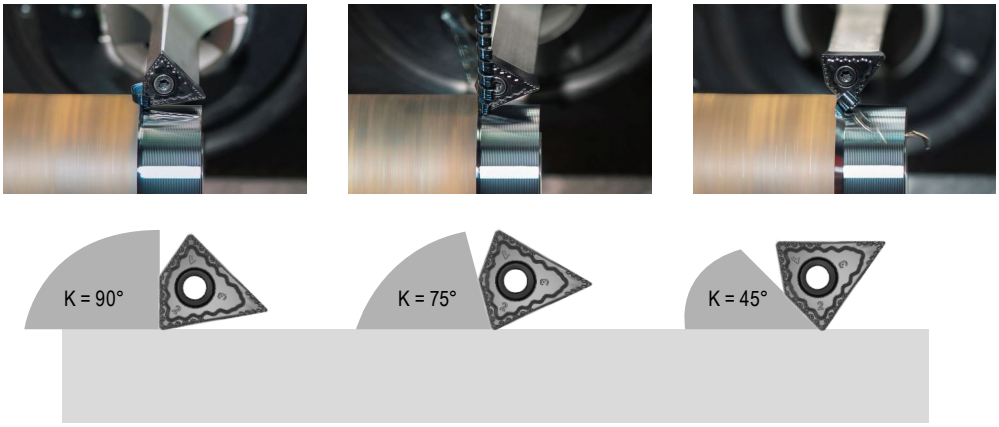

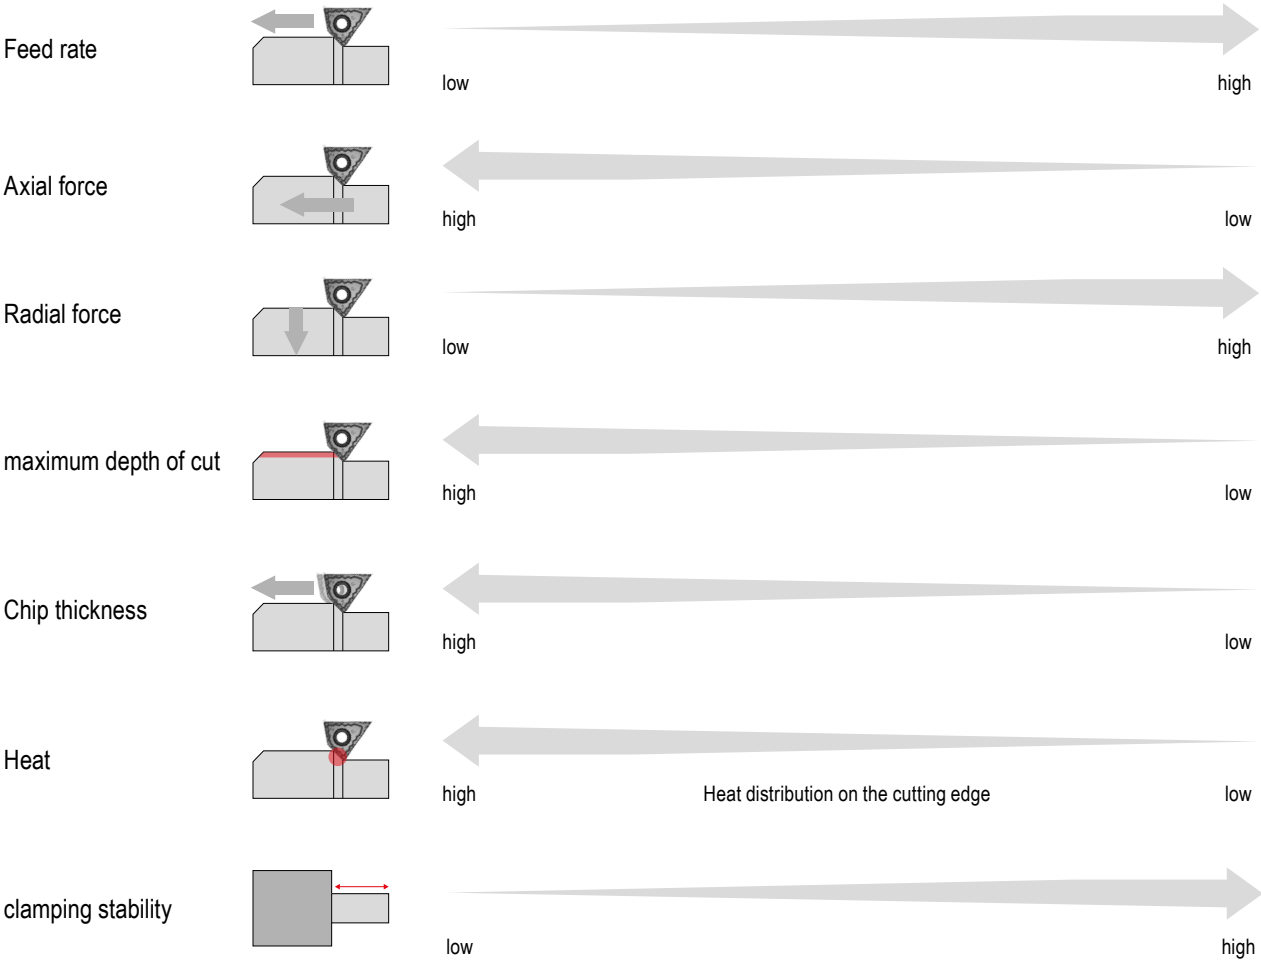

Approach angle

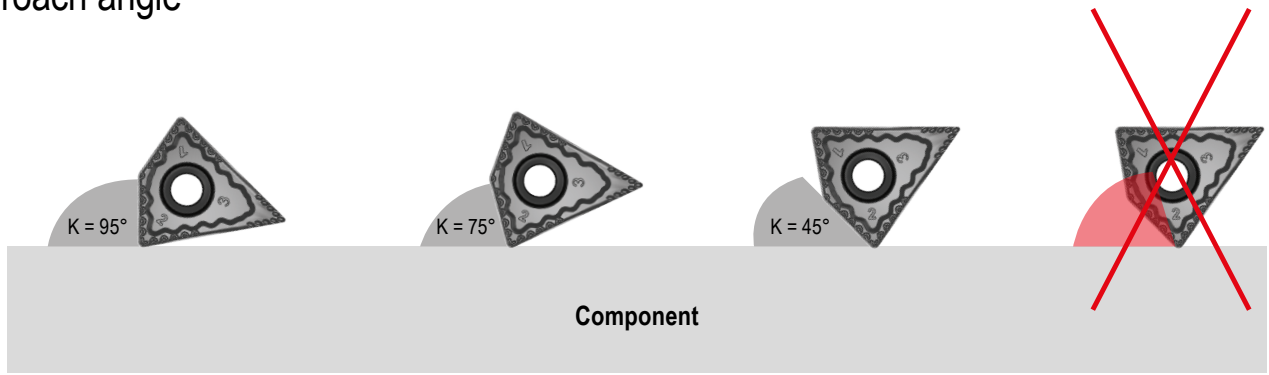

The approach angle always works from the edge of the component to the main cutting edge (tool).

Tool / workpiece length ratio

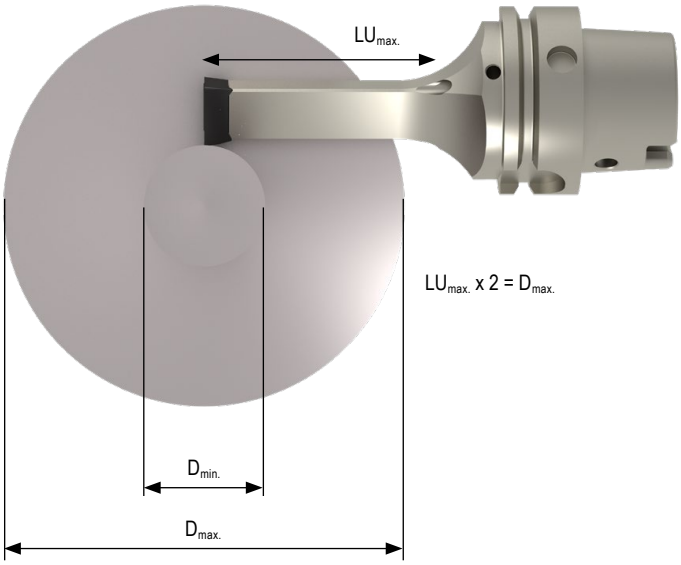

This table shows the diameter ranges you can work in with the different tool lengths.

Tool	$D_{max.}$ in mm	200	190	180	170	160	150	140	130	120	110	100	90	80
PSC-63-**100**-FT 808055	$D_{min.}$ in mm					127	115	102	88	73	56	34	0	0
PSC-63-**125**-FT 808055	$D_{min.}$ in mm	138	125	110	90	70	42	0	0	0	0	0	0	0

Force data from the process

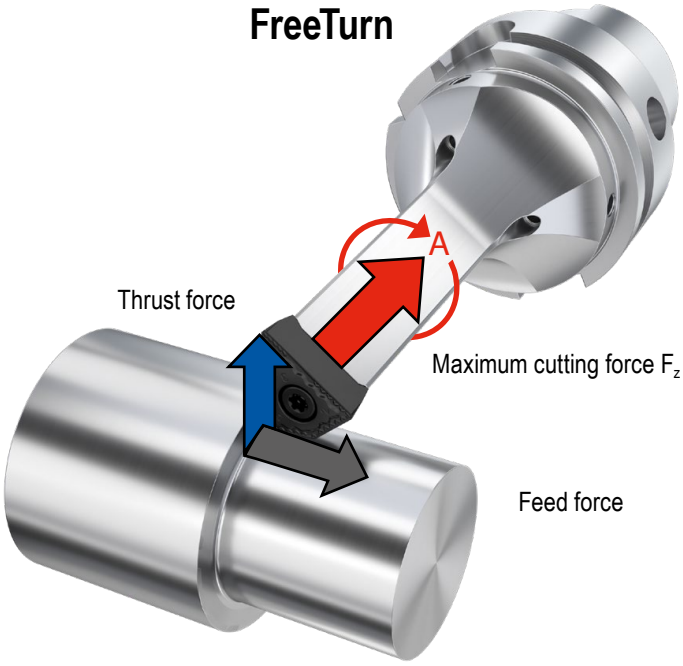

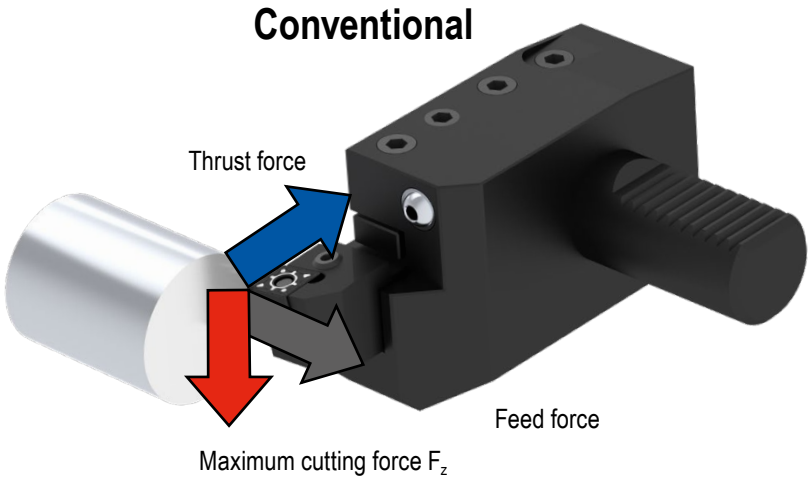

Practical test	
Steel machining shaft Ø 60 mm 1.7227 / 42CrMoS4 R_m 850 Nm	Cutting data: v_c = 175 m/min. f = 0.3 mm/rev. a_p = 3.0 mm K = 95°

FreeTurn		Conventional
2136 N	F XYZ	2206 N
920 N	F XY (feed force)	2143 N
1928 N	Maximum cutting force F_z	526 N

10

Grade description

EcoCut Classic

CTCP425-P



ISO **P25** | M20 | K30

Specification:
Composition: Co 7.0%; mixed carbides 8.1%; WC balance | Grain size: 1-2 µm | Hardness: HV_{30} 1470 |
Coating specification: CVD Ti(CN) + Al_2O_3 multi-layer

Recommended application:
The wear-resistant solution for steel and cast iron under stable conditions and with high cutting speed

CTCP435-P



ISO **P35** | M30 | K40 | S25

Specification:
Composition: Co 9.6%; mixed carbides 7.8%; others 0.4%; WC balance | Grain size: 1-2 µm | Hardness: HV_{30} 1400 |
Coating specification: CVD Ti(C,N) + Al_2O_3 multi-layer

Recommended application:
The reliable choice when machining steel and cast iron under unstable conditions.

CTPP430



ISO | **P30** | **M25** | K30 | N25 | S25 | O25

Specification:
Composition: Co 9.0%; others 0.75%; WC balance | Grain size: 0.85 µm | Hardness: HV_{30} 1590 | Coating specification: PVD TiAlN

Recommended application:
The universal high-performance grade for steel, austenitic steel and heat-resistant alloys

H210T



ISO | K10 | **N10** | **S10** | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 0.8 µm | Hardness: HV_{30} 1850

Recommended application:
The wear-resistant uncoated carbide grade for the machining of aluminium and other non-ferrous metals.

H216T



ISO | K15 | **N15** | S15 | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1630

Recommended application:
The uncoated carbide grade for the machining of aluminium and other non-ferrous metals

EcoCut Mini

CTPP435



ISO **P35** | **M30** | K30 | N30 | **S30** | O30

Specification:
Composition: Co 10.3%; others 1.2%; WC balance | Grain size: 0.7 µm | Hardness: HV_{30} 1600 | Coating specification: PVD TiN / TiAlN

Recommended application:
The universal high-performance grade for steel, austenitic steel and heat-resistant alloys

CTWN425



ISO K20 | **N25** | S25 | O25

Specification:
Composition: Co 10.3%; others 1.2%; WC balance | Grain size: 0.7 µm (submicron grade) | Hardness: HV_{30} 1600

Recommended application:
The uncoated carbide grade for the machining of aluminium and other non-ferrous metals.

Grade description

EcoCut ProfileMaster

CTPP430



ISO | **P30** | **M25** | K30 | N25 | S25 | O25

Specification:
Composition: Co 9.0%; others 0.75%; WC balance | Grain size: 0.85 µm | Hardness: HV_{30} 1590 | Coating specification: PVD TiAlN

Recommended application:
The universal high-performance grade for steel, austenitic steel and heat-resistant alloys

FreeTurn

CTCP125



ISO | **P25** | K25

Specification:
Composition: Co 7.0%; mixed carbides 8.0%; WC balance | Grain size: 1 - 2 µm | Hardness: HV_{30} 1450 |
Coating specification: CVD TiCN-Al_2O_3

Recommended application:
The first choice for the universal machining of steel

CTPM125



ISO | P35 | **M25**

Specification:
Composition: Co 9.6%; mixed carbides 7.8%; others 0.4%; WC balance | Grain size: 1 - 2 µm | Hardness: HV_{30} 1460 |
Coating specification: PVD TiAlTaN

Recommended application:
The first choice for the machining of austenitic steels

H216T



ISO | K15 | **N15** | S15 | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1630

Recommended application:
The uncoated carbide grade for the machining of aluminium and other non-ferrous metals

10

Application

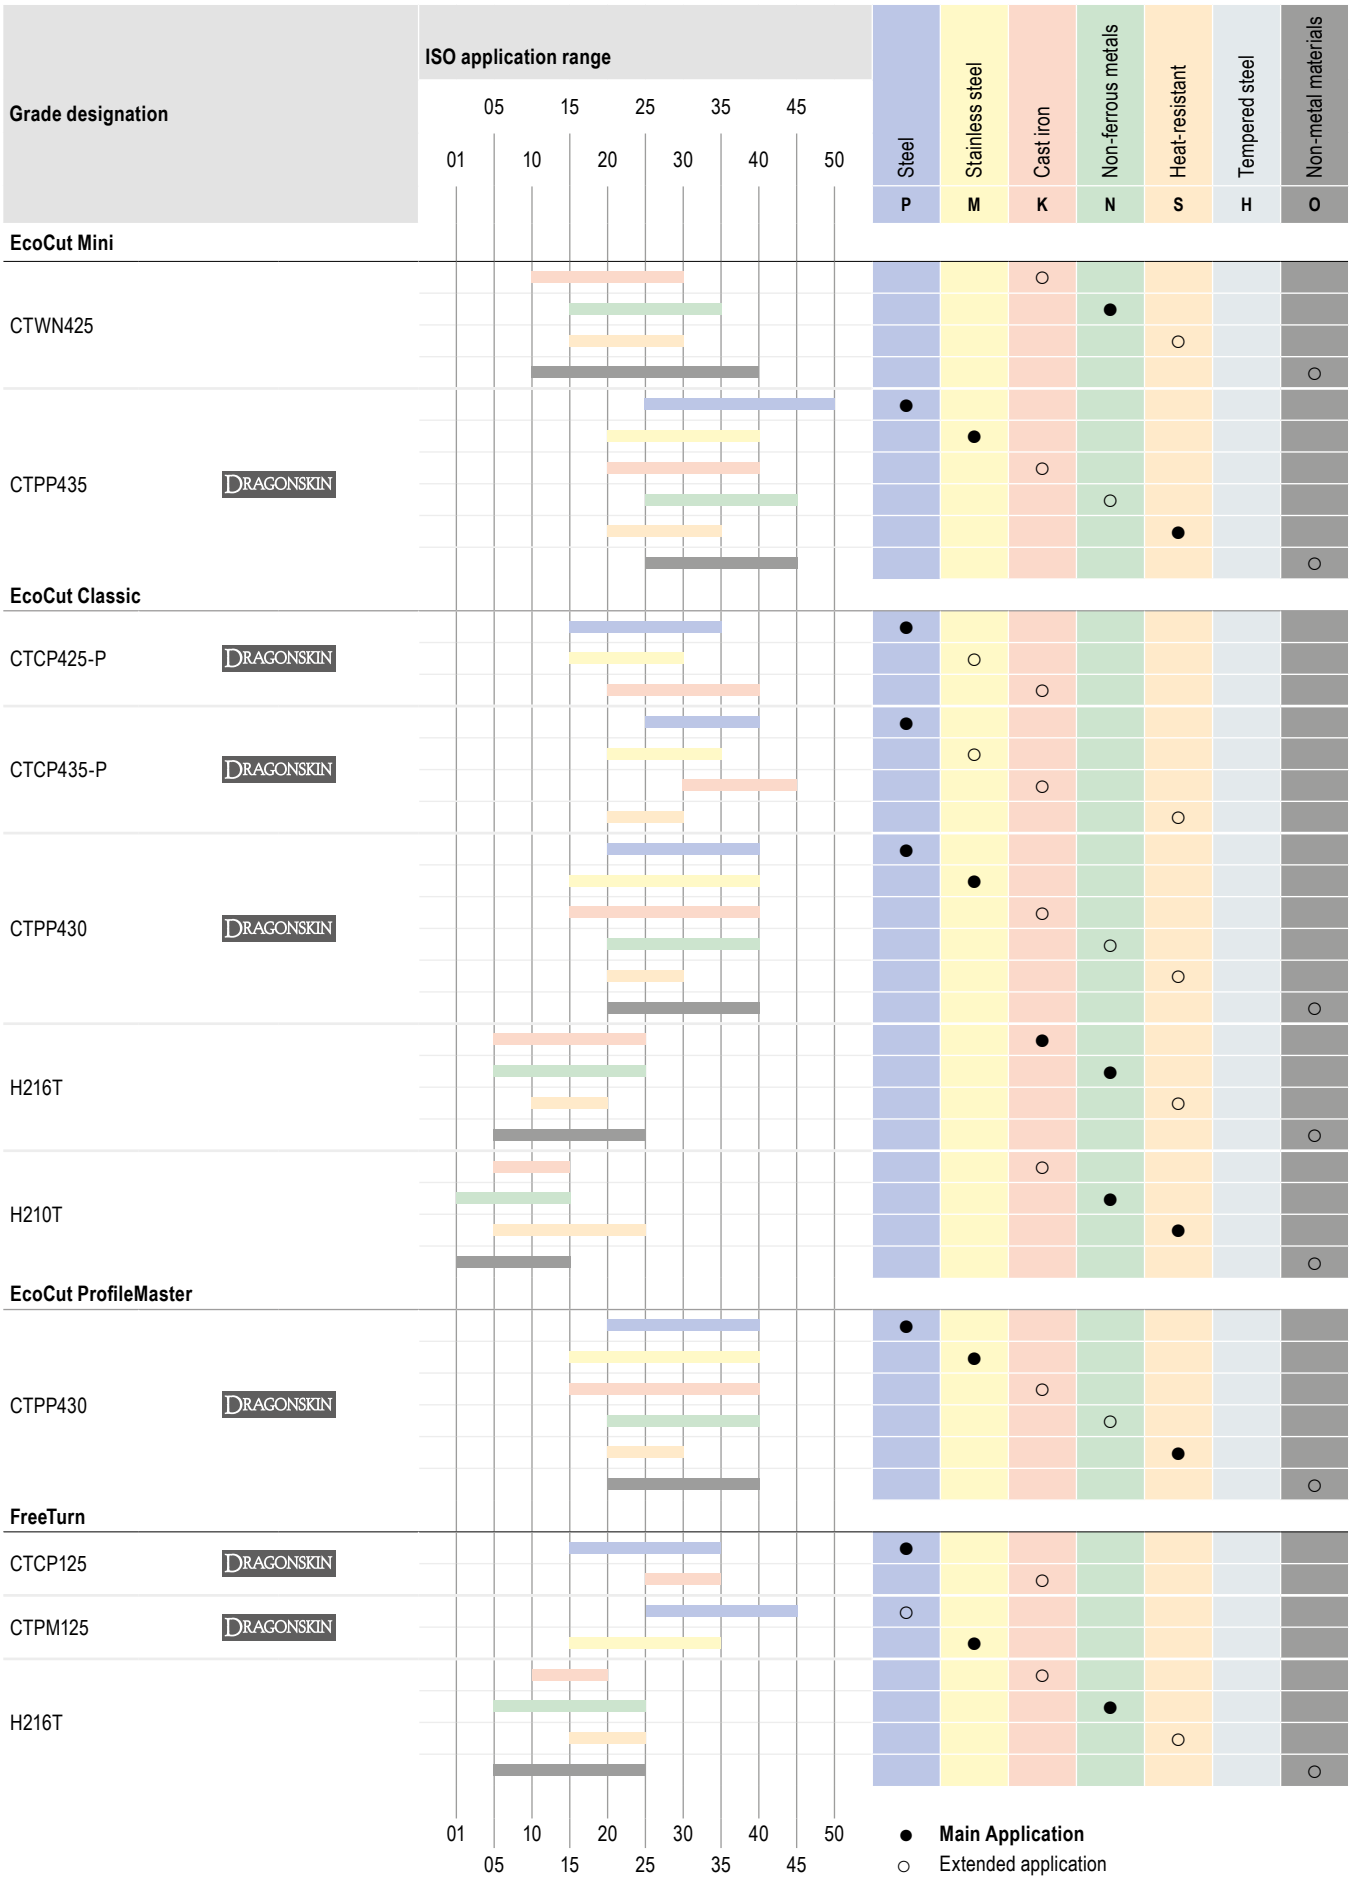

Designation System

EcoCut – indexable insert designation

X	C	E	T		17	05	08	F	N	-	27P
1	2	3	4		5	6	7	8	9		10



1 Insert shape
2 Clearance angle
3 Tolerances
4 Characteristics
5 Cutting length
6 Insert thickness
7 Corner radius
8 Cutting edge
9 Direction of cut
10 Chip groove

EcoCut – holder designation

ECC	32	R	-	3.0D	17	H
1	2	3		4	5	6

1 System
2 Nominal diameter in mm
3 Direction of cut
4 maximum hole depth
5 insert size
6 Tool holder version in Densimet

10

EcoCut ProfileMaster – indexable insert designation

PM	25	R	G	35	30	04	-	M20
1	2	3	4	5	6	7		8



1 ProfileMaster
2 Nominal diameter in mm
3 Direction of cut
4 Version
5 Groove width in mm/10
6 Groove depth in mm/10
7 Corner radius
8 Chip groove

EcoCut ProfileMaster – holder designation

PMC	25	R	-	2.25D
1	2	3		4

1 ProfileMaster
2 Nominal diameter in mm
3 Direction of cut
4 maximum hole depth

Designation System

FreeTurn – indexable insert designation



FT15	M/G	808055	R	080804	Q	MMF	CTCP125
1	2	3	4	5	6	7	8	9	10	11	12

1. FreeTurn
2. Nominal diameter in mm
3. ISO tolerance (M = sintered, G = polished)
4. Cutter angle 1 in degrees
5. Cutter angle 2 in degrees
6. Cutter angle 3 in degrees
7. Corner radius 1 in mm
8. Corner radius 2 in mm
9. Corner radius 3 in mm
10. Wiper geometry
11. Chip breaker (M = medium, F = fine)
12. Carbide Grade

FreeTurn – holder designation

HSK	-	T63	-	100	-	FT15	808055
1	2	3	4	5	6	7	8

1. System
2. Size
3. Overhang length
4. FreeTurn
5. Nominal diameter in mm
6. Cutter angle 1 in degrees
7. Cutter angle 2 in degrees
8. Cutter angle 3 in degrees

New products for machining technicians

NEW -M7

The new M7 geometry is designed for grooving and parting off.
With medium-high feed rates, its best performance is achieved in steel.

→ Page 18

NEW -M8

The ground M8 geometry will become the first choice for the machining of stainless steel. This geometry can only be used for grooving and parting off.

→ Page 19

NEW **MaxiChange** – Exchangeable head system





As the MaxiChange exchangeable head system is modular, it is extremely flexible and can be used for a variety of applications thanks to the wide selection of exchangeable heads. On top of these advantages, the MaxiChange GX also includes a grooving function for internal and external machining as well as axial and radial machining.

For radial grooving GX 16 → Page 51
For axial grooving GX 24 → Page 70

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools 11

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	5
System overview	5
Toolfinder	6–13
Product programme	14–86
Technical Information	
Cutting Data	87+88
Depths of Cut and Feedrates	89–93
Grooving depth reduction	94+95
Clamping Methods	96+97
Torque Moment ModularClamp Module Screws	98
Advantages due to DirectCooling	99
Advantages of the trochoidal turning strategy	99
General references	100
Measures for problems and causes of wear	101+102
Chip Breakers Overview	103–105
Example of Coding Grooving Tools	106
Grade description and overview	107+108

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Advantages due to DirectCooling

Direct Cooling

- ▲ Improved chip control
- ▲ Longer service life of the indexable insert
- ▲ Greater process security
- ▲ Application of higher cutting data
- ▲ Reduced wear
- ▲ Universal application

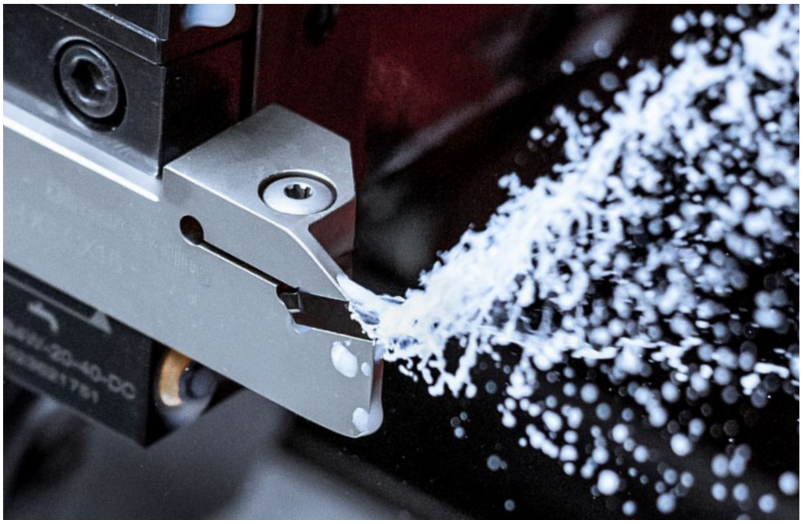

cuttingtools.ceratizit.com/ie/en/direct-cooling

Symbol explanation

Grooving

Parting

Grooving and Turning

Copy Turning

Axial Grooving and Turning

Circlip Grooves

Internal machining

Internal thread

External thread

F Fine Machining

M Medium Machining

R Rough Machining

Main Application / Extended application

DirectCooling

Int. coolant supply

Repeatability

-F2 CTPP345 Chip groove / Carbide Grade

Smooth cut / Irregular cutting depth / Interrupted cut

System overview

No. of cutting edges	System	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circlip Grooves	Internal machining	External machining CW (mm)	External machining CDX max. (mm)	Internal machining DMIN (mm)	Internal machining CDX max. (mm)	Axial machining DAXN (mm)	Axial machining CDX max. (mm)	Page No.
1	SX	●	●	●	●				2–6	60					14–29
	LX	●	●	●	●	●			8–10	80	200	34	500	39	30–33
2	GX 09	●	●	●	●		●	●	2–3,5	7	16	6			34–51
	GX 16	●	●	●	●		●	●	2–6	12	20,5	11			34–51
	GX 24	●	●	●	●	●		●	2–6	21	42	19	45	25	52–70
3	TX	●	●	●	●	●	●	●	0,5–5,15	8	46	2	20	3	71–79

11

Toolfinder

System	ModularClamp	MonoClamp
	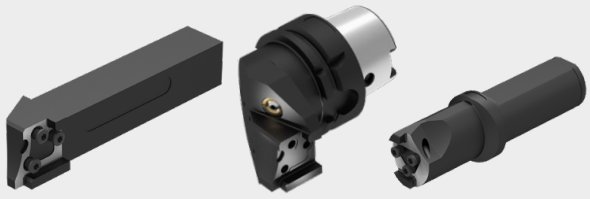 0° / 90° 80+81 · 0° 82 · 1,5xD / 2,5xD 83	84–86 · → Chapter 16
SX	21	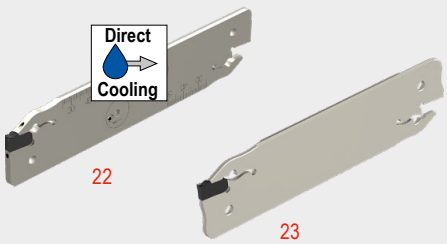 Direct Cooling 22 · 23
		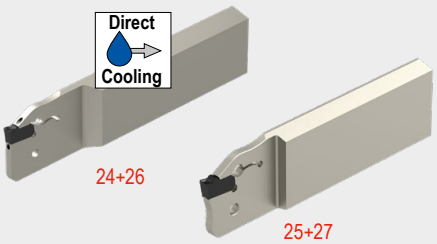 Direct Cooling 24+26 · 25+27
		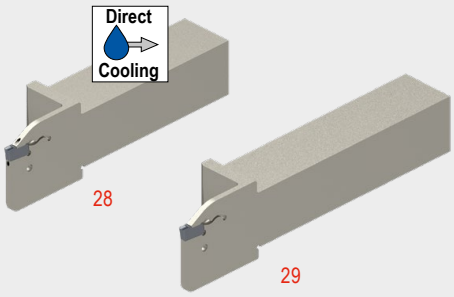 Direct Cooling 28 · 29
LX	32	 33

System		Chip groove	Groove width	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circlip Grooves	Fine Machining F	Medium Machining M	Rough Machining R	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Page No.
SX		-F2	2–4										●	●	●	○	●		○	14
		-M1	2–6										●	●	●	○	●		○	15
		-M2	2–6										●	●	●	○	●		○	16
		-M3	CRE 1,5–3,0										●	●	●	○	●		○	17
		NEW -M7	2–6										●	●	●	○	●		○	18
		NEW -M8	2–6										●	●	●	○	●		○	19
		-27P	2–4												●	●	○		○	20
LX		-M2	8–10										●	●	●	○	●		○	30
		-M3	CRE 4,0										●	●	●	○	●		○	31

11

Toolfinder

System

ModularClamp

0° / 90°
80+81

0°
82

1,5xD / 2,5xD
83

MonoClamp

→ Chapter 16

GX 09

42

43

44

45

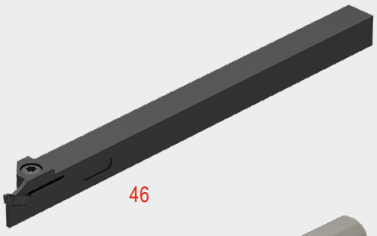

46

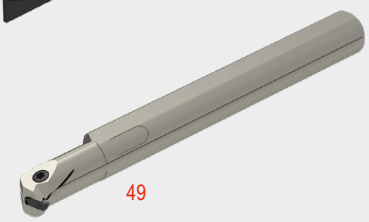

49

GX 16

42

43

44

45

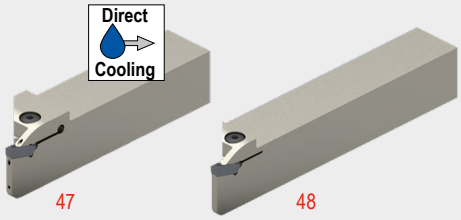

47

48



50

MaxiChange

→ Page 12+13
Here you will find a detailed system overview.

NEW



51

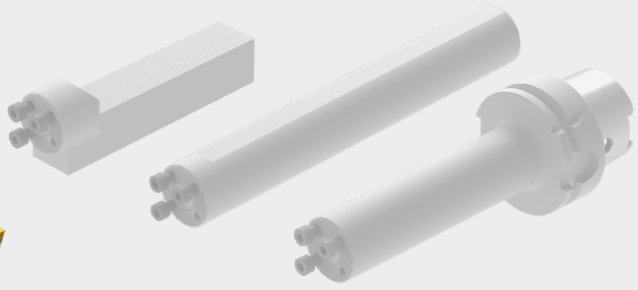

→ Chapter 9 – Turning Tools
Here you will find the suitable base adaptors.

System		Chip groove	Groove width	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circlip Grooves	Fine Machining F	Medium Machining M	Rough Machining R	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Page No.
GX 09 GX 16		-F2	2–5										●	●	●	○	●		○	34
		Standard	2–6										●	●	●	○	●		○	35
		-M40	2–6										●	●	●	○	●		○	36
		Standard	CRE 0,8–3,0										●	●	●	○	●		○	40
		Standard	1–4,25										●	●	●	○	●		○	39
GX 16		-M1	2–4										●	●	●	○	●		○	37
		-27P	2–6												●	●	○		○	38
		-27P	CRE 1,5–2,5												●	●	○		○	41

11

Toolfinder

System

ModularClamp

0° / 90°
80+81

0°
82

1,5xD / 2,5xD
83

MonoClamp

85+86

→ Chapter 16

GX 24



60



61

62

63



64

Direct Cooling



65



66

69



67+68

MaxiChange

→ Page 12+13
Here you will find a detailed system overview.

NEW



70

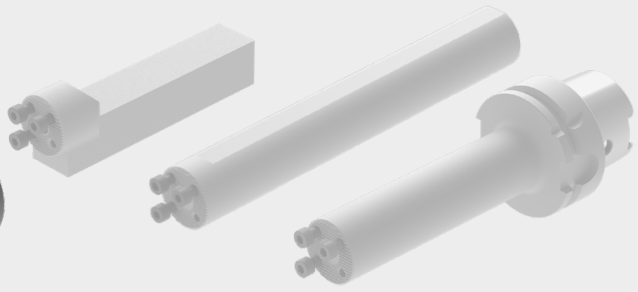

→ Chapter 9 – Turning Tools
Here you will find the suitable base adaptors.

System		Chip groove	Groove width	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circlip Grooves	Fine Machining F	Medium Machining M	Rough Machining R	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Page No.
GX 24		-F2	3–6										●	●	●	○	●		○	52
		-E	3–6										●	●	●	○	●		○	53
		-M1	2–4										●	●	●	○	●		○	54
		-M40	3–6										●	●	●	○	●		○	55
		-M3	CRE 1,5–3,0										●	○	●		○			56
		-M33	CRE 1,5–3,0										●	○	●		○			57
		-27P	3–6												●	●	○		○	58
		-27PF	CRE 3–4												●	●	○		○	59

11

Toolfinder

System

MonoClamp

→ Chapter 16

TX



76





77



78

79

System overview

MaxiChange

Exchangeable heads

For radial grooving

NEW

GX 16

51



For axial grooving

NEW

GX 24

70



→ **Chapter 9 – Turning Tools**

Exchangeable heads

For negative inserts

PCLN 95°

PDUN 93°



PDQN 107,5°

PWLN 95°

For positive inserts

SCLC 95°



SDUC 93°



SDQC 107,5°

SVPC 117,5°

SVUC 93°

SVQC 107,5°

For internal thread



System		Chip groove	Groove width	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circlip Grooves	Fine Machining F	Medium Machining M	Rough Machining R	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Page No.
TX			1,99–2,79										●	●	●	●	●	○	●	71
			0,57–5,29										●	●	●	●	●	○	●	72
			CRE 0,25–2,5										●	●	●	●	●	○	●	73
			1,5–4,0										●	●	●	●	●	○	●	74
			1,5–3,0										●	●	●	●	●	○	●	75

MaxiChange

→ **Chapter 9 – Turning Tools**

Tool holder

PSC

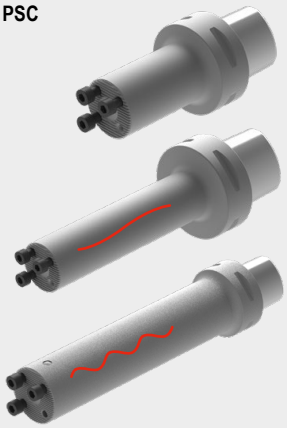

HSK-T

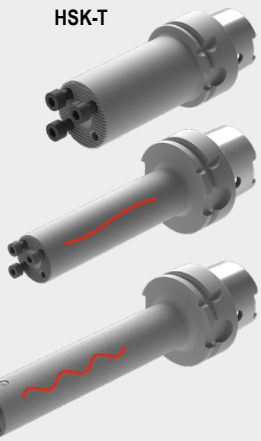

Vibration damped

Actively vibration-damped

Square shank holder

0°



90°



Cylindrical shank

Actively vibration-damped

→ **cuttingtools.ceratizit.com**

VertiClamp

→ catalouge: sliding head

MaxiClick



System FX



System AX

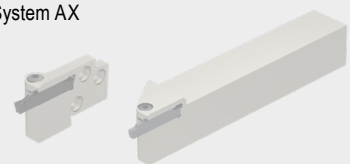

System TC

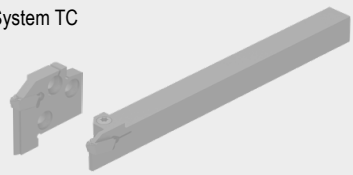

11

Insert SX

▲ High precision ground geometry

F	M	R



-F2 CTCP325	-F2 CTCP335	-F2 CTPP345	-F2 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

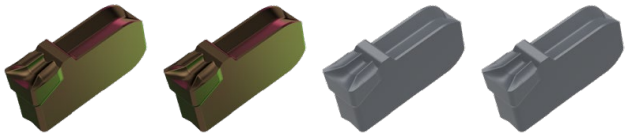

Designation	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 346 ... EUR 1C/72		70 346 ... EUR 1C/72		70 346 ... EUR 1C/72		70 346 ... EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2					23,67	**822**	23,67	**622**
SX E3.00 N 0.30	3	0,3	2,0	-SX3	25,44	**923**	25,44	**523**	25,44	**823**	25,44	**623**
SX E4.00 N 0.40	4	0,4	2,5	-SX4					26,91	**824**	26,91	**624**
P					●		●		●		●	
M					○		○		●		●	
K					●		●				●	
N											○	
S					○				○		●	
H												
O											○	

→ v_c Page 88
→ Application recommendation on page 92

Internal machining

External machining

→ 21 | → 22+23 | → 24–27 | → 28+29

Insert SX

▲ Specially developed geometry with negative edge-chamfers available in right, left and neutral types



F	M	R



-M1 CTCP325	-M1 CTCP335	-M1 CTPP345	-M1 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

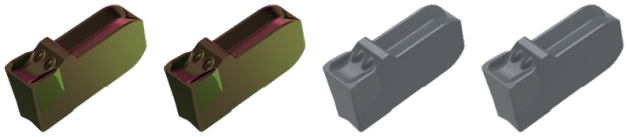

Designation	IH	CW +/-0,05 mm	RE +/-0,05 mm	PSIR	for tool holder	70 342 ... EUR 1C/72		70 342 ... EUR 1C/72		70 342 ... EUR 1C/72		70 342 ... EUR 1C/72	
SX E2.00 L 6	L	2	0,2	6°	-SX2							15,87	**612**
SX E3.00 L 6	L	3	0,2	6°	-SX3	16,89	**913**					16,89	**613**
SX E4.00 L 6	L	4	0,3	6°	-SX4							17,80	**614**
SX E2.00 N 0.20	N	2	0,2		-SX2	15,87	**922**	15,87	**52200**	15,87	**822**	15,87	**622**
SX E3.00 N 0.20	N	3	0,2		-SX3	16,89	**923**	16,89	**523**	16,89	**823**	16,89	**623**
SX E4.00 N 0.30	N	4	0,3		-SX4	17,80	**924**	17,80	**524**	17,80	**824**	17,80	**624**
SX E5.00 N 0.30	N	5	0,3		-SX5	18,95	**925**	18,95	**52500**	18,95	**825**	18,95	**625**
SX E6.00 N 0.40	N	6	0,4		-SX6	20,44	**926**	20,44	**52600**	20,44	**826**	20,44	**626**
SX E2.00 R 6	R	2	0,2	6°	-SX2							15,87	**602**
SX E3.00 R 6	R	3	0,2	6°	-SX3	16,89	**903**					16,89	**603**
SX E4.00 R 6	R	4	0,3	6°	-SX4							17,80	**604**

P	●	●	●	●
M	○	○	●	●
K	●	●		●
N				○
S	○		○	●
H				
O				○

→ v_c Page 88
→ Application recommendation on page 92

11

Note: reduce feed rate by 20–50 % with R/L version!

→ **Page 100**
Here you will find further information.

Internal machining | *External machining*

→ 21 | → 22+23 | → 24–27 | → 28+29

Insert SX

▲ All purpose geometry for parting, grooving & turning.

F	M	R



-M2 CTCP325	-M2 CTCP335	-M2 CTPP345	-M2 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

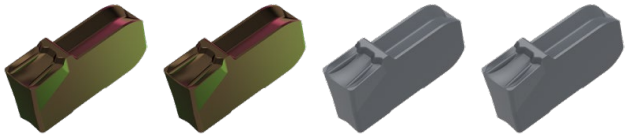

Designation	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 343 ... EUR 1C/72		70 343 ... EUR 1C/72		70 343 ... EUR 1C/72		70 343 ... EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2	15,87	**922**	15,87	**522**	15,87	**822**	15,87	**622**
SX E3.00 N 0.30	3	0,3	2,0	-SX3	16,89	**923**	16,89	**523**	16,89	**823**	16,89	**623**
SX E4.00 N 0.40	4	0,4	2,5	-SX4	17,80	**924**	17,80	**524**	17,80	**824**	17,80	**624**
SX E5.00 N 0.40	5	0,4	2,7	-SX5	18,95	**925**	18,95	**525**	18,95	**825**	18,95	**625**
SX E6.00 N 0.50	6	0,5	3,0	-SX6	20,44	**926**	20,44	**526**	20,44	**826**	20,44	**626**
P					●		●		●		●	
M					○		○		●		●	
K					●		●				●	
N											○	
S					○				○		●	
H												
O											○	

→ v_c Page 88
→ Application recommendation on page 92

Internal machining | *External machining*

→ 21 | → 22+23 | → 24–27 | → 28+29

Radius Grooving Insert SX

▲ for grooving and copy turning
▲ very good chip control

F	M	R



-M3	-M3
CTCP335	CTP1340
DRAGONSKIN	DRAGONSKIN

Designation	CW +/-0,05 mm	CRE mm	PDPT mm	for tool holder	70 344 ... EUR 1C/72		70 344 ... EUR 1C/72	
SX R1.50 N	3	1,5	1,5	-SX3	17,96	**531**	17,96	**631**
SX R2.00 N	4	2,0	2,0	-SX4	18,95	**532**	18,95	**632**
SX R2.50 N	5	2,5	2,5	-SX5	20,01	**533**	20,01	**633**
SX R3.00 N	6	3,0	3,0	-SX6			21,77	**634**

P	●	●
M	○	●
K	●	●
N		○
S		●
H		
O		○

→ v_c Page 88
→ Application recommendation on page 93

Internal machining | *External machining*

→ 21 | → 22+23 | → 24–27 | → 28+29

11

Insert SX

▲ For grooving and parting off in steel at medium to high feed rates



F	M	R



NEW

-M7
CTP1340

DRAGONSKIN



70 347 ...

Designation	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2	15,87	**62200**
SX E3.00 N 0.20	3	0,2	2,0	-SX3	16,89	**62300**
SX E4.00 N 0.30	4	0,3	2,5	-SX4	17,80	**62400**
SX E5.00 N 0.30	5	0,3	2,7	-SX5	18,95	**62500**
SX E6.00 N 0.40	6	0,4	3,0	-SX6	20,44	**62600**

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v_c Page 88
→ Application recommendation on page 92

Internal machining | *External machining*

→ 21 | → 22+23 | → 24–27 | → 28+29

Insert SX

▲ Ground geometry
▲ First choice for the grooving and parting off of stainless steel



F	M	R



NEW

-M8
CTP1340

DRAGONSKIN



70 348 ...

Designation	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2	23,67	**62200**
SX E3.00 N 0.20	3	0,2	2,0	-SX3	25,44	**62300**
SX E4.00 N 0.30	4	0,3	2,5	-SX4	26,91	**62400**
SX E5.00 N 0.30	5	0,3	2,7	-SX5	28,65	**62500**
SX E6.00 N 0.40	6	0,4	3,0	-SX6	30,90	**62600**

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v_c Page 88
→ Application recommendation on page 92

Internal machining | *External machining*

→ 21 | → 22+23 | → 24–27 | → 28+29

11

Insert SX

▲ Insert with highly positive cutting edge geometry and sharp cutting edge
▲ Specialist for aluminum and other soft long-chipping non-ferrous metals

F	M	R



-27P
H216T



70 349 ...

Designation	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	EUR 1C/72	
SX E2.00 N 0.20	2	0,2	2,0	-SX2	18,83	**122**
SX E3.00 N 0.30	3	0,3	2,5	-SX3	20,15	**123**
SX E4.00 N 0.40	4	0,4	3,0	-SX4	21,33	**124**

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 88
→ Application recommendation on page 92

Internal machining			*External machining*			
			→ 21	→ 22+23	→ 24–27	→ 28+29

ModularClamp MSS – Radial grooving module SX

▲ for parting, grooving and finish turning

Scope of supply:
Grooving module only

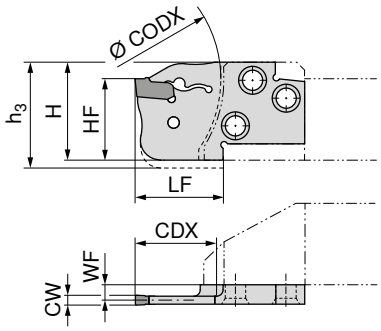



Illustrations show right-hand versions

ISO designation	HF mm	CW mm	WF mm	LF mm	H mm	h_3 mm	CODX mm	CDX mm	for grooving inserts	Left-hand 70 897 ... EUR 2C/71		Right-hand 70 896 ... EUR 2C/71	
E20 R/L 20-SX2	20	2	3,57	22	24	27	60	20	SX .2..	108,60	**020**	108,60	**020**
E20 R/L 20-SX3	20	3	3,20	22	24	27	60	20	SX .3..	108,60	**120**	108,60	**120**
E25 R/L 20-SX2	25	2	5,07	22	30		75	20	SX .2..	109,40	**025**	109,40	**025**
E25 R/L 25-SX3	25	3	4,70	27	30		75	25	SX .3..	109,40	**125**	109,40	**125**
E25 R/L 35-SX3	25	3	4,70	37	30		75	35	SX .3..	110,50	**225**	110,50	**225**
E25 R/L 25-SX4	25	4	4,30	27	30		75	25	SX .4..	109,40	**325**	109,40	**325**
E25 R/L 35-SX4	25	4	4,30	37	30		75	35	SX .4..	110,50	**425**	110,50	**425**

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .2..	SX 2-3	33,63	**836**
SX .3..	SX 2-3	33,63	**836**
SX .4..	SX 4-6	34,31	**837**

Please order SX assembly key separately if required.




→ 14–20 → 80+81 → 82

11

MonoClamp – Radial Blade SX-DC Standard

Scope of supply:
Blade incl. 1 sealing screw

Direct Cooling

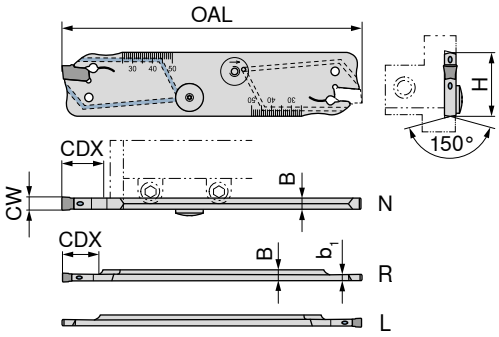

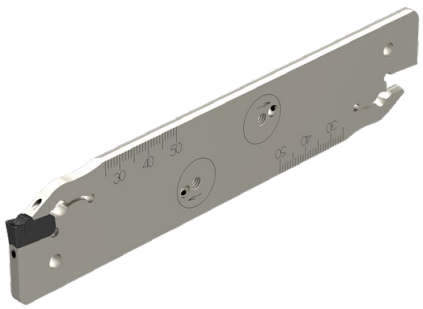

ISO designation	R/L/N	CW mm	H mm	B mm	b_1 mm	OAL mm	CDX mm	for grooving inserts	70 884 ... EUR 2A/25	
XLCF L 2602-DC-SX2	L	2	26	2,4	1,6	110	25	SX .2..	190,90	**712**
XLCF R 2602-DC-SX2	R	2	26	2,4	1,6	110	25	SX .2..	190,90	**512**
XLCF N 2603-DC-SX3	N	3	26	2,5		110	35	SX .3..	190,90	**613**
XLCF N 2604-DC-SX4	N	4	26	3,3		110	40	SX .4..	190,90	**614**
XLCF L 3202-DC-SX2	L	2	32	2,4	1,6	150	26	SX .2..	206,90	**702**
XLCF R 3202-DC-SX2	R	2	32	2,4	1,6	150	26	SX .2..	206,90	**502**
XLCF N 3203-DC-SX3	N	3	32	2,5		150	50	SX .3..	206,90	**603**
XLCF N 3204-DC-SX4	N	4	32	3,3		150	50	SX .4..	206,90	**604**
XLCF N 3205-DC-SX5	N	5	32	4,3		150	55	SX .5..	206,90	**605**
XLCF N 3206-DC-SX6	N	6	32	5,2		150	60	SX .6..	206,90	**606**

Key D

Ejector SX

Sealing screw

Spare parts for grooving inserts		80 950 ... EUR Y7			70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
SX .2..	T15 - IP	15,33	**128**	SX 2-3	33,63	**836**	M4 x 3	16,61	**450**
SX .3..	T15 - IP	15,33	**128**	SX 2-3	33,63	**836**	M4 x 3	16,61	**450**
SX .4..	T15 - IP	15,33	**128**	SX 4-6	34,31	**837**	M4 x 3	16,61	**450**
SX .5..	T15 - IP	15,33	**128**	SX 4-6	34,31	**837**	M4 x 3	16,61	**450**
SX .6..	T15 - IP	15,33	**128**	SX 4-6	34,31	**837**	M4 x 3	16,61	**450**

Please order SX assembly key separately if required.


→ 14–20

→ 84

→ **Chapter 16**

→ **Chapter 16**

MonoClamp – Radial Blade SX Standard

Scope of supply:
Blade only

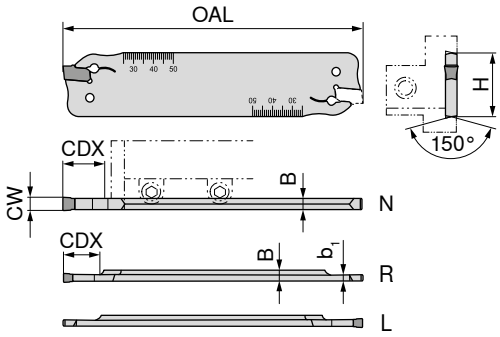

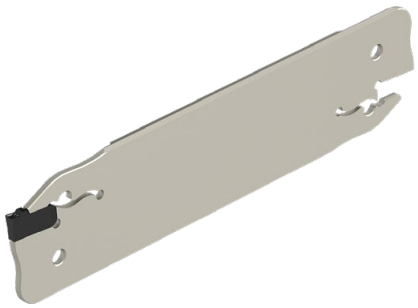

ISO designation	R/L/N	CW mm	H mm	B mm	b_1 mm	OAL mm	CDX mm	for grooving inserts	70 884 ... EUR 2A/25	
XLCF L 2602-SX2	L	2	26	2,4	1,5	110	25	SX .2..	111,90	**212**
XLCF R 2602-SX2	R	2	26	2,4	1,5	110	25	SX .2..	111,90	**012**
XLCF N 2603-SX3	N	3	26	2,4		110	35	SX .3..	111,90	**113**
XCLF N 2604-SX4	N	4	26	3,2		110	40	SX .4..	111,90	**114**
XLCF L 3202-SX2	L	2	32	2,4	1,5	150	25	SX .2..	117,10	**202**
XLCF R 3202-SX2	R	2	32	2,4	1,5	150	25	SX .2..	117,10	**002**
XLCF N 3203-SX3	N	3	32	2,4		150	50	SX .3..	117,10	**103**
XLCF N 3204-SX4	N	4	32	3,2		150	50	SX .4..	117,10	**104**
XLCF N 3205-SX5	N	5	32	4,2		150	55	SX .5..	117,10	**105**
XLCF N 3206-SX6	N	6	32	5,2		150	60	SX .6..	117,10	**106**

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .2..	SX 2-3	33,63	**836**
SX .3..	SX 2-3	33,63	**836**
SX .4..	SX 4-6	34,31	**837**
SX .5..	SX 4-6	34,31	**837**
SX .6..	SX 4-6	34,31	**837**

11

Please order SX assembly key separately if required.



→ 14–20

→ 85+86

→ **Chapter 16**

→ **Chapter 16**

MonoClamp – Radial Blade SX-DC reinforced

Scope of supply:
Blade only

Direct Cooling

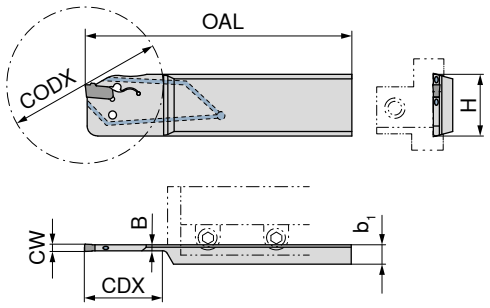

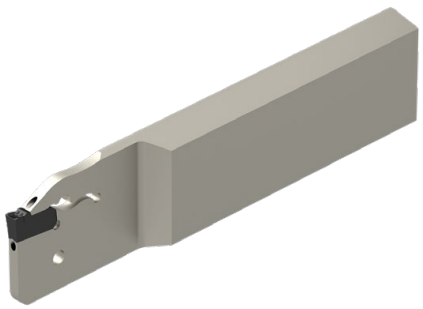

Illustrations show right-hand versions

ISO designation	R/L/N	CW mm	H mm	B mm	b_1 mm	OAL mm	CODX mm	CDX mm	for grooving inserts	70 879 ... EUR 2A/25	
XLCF L 2608-DC-SX3	L	3	26	2,5	8	110	66	33	SX .3..	190,90	**713**
XLCF R 2608-DC-SX3	R	3	26	2,5	8	110	66	33	SX .3..	190,90	**513**
XLCF L 3208-DC-SX3	L	3	32	2,5	8	110	66	33	SX .3..	206,90	**703**
XLCF R 3208-DC-SX3	R	3	32	2,5	8	110	66	33	SX .3..	206,90	**503**

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .3..	SX 2-3	33,63	**836**

Please order SX assembly key separately if required.

→ 14–20

→ 84

→ **Chapter 16**

→ **Chapter 16**

Correct Tool Selection

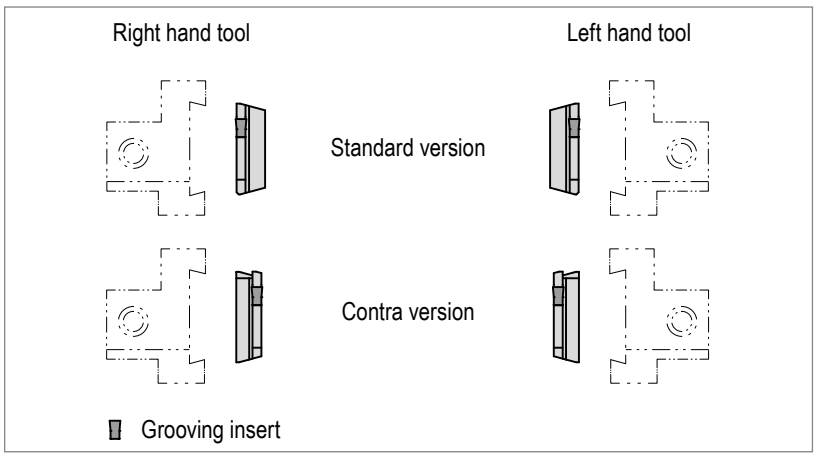



MonoClamp – Radial Blade SX reinforced

Scope of supply:
Blade only

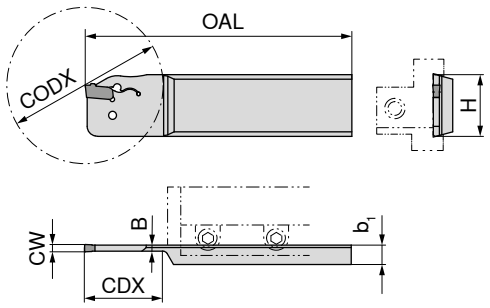

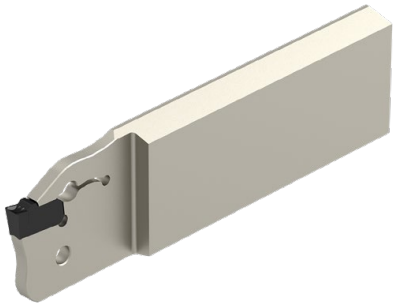

Illustrations show right-hand versions

ISO designation	R/L/N	CW mm	H mm	B mm	b_1 mm	OAL mm	CODX mm	CDX mm	for grooving inserts	70 879 ... EUR 2A/25	
XLCF L 2608-SX3	L	3	26	2,5	8	110	44	22	SX .3..	171,40	**213** [1]
XLCF R 2608-SX3	R	3	26	2,5	8	110	44	22	SX .3..	171,40	**013** [1]
XLCF L 3208-SX3	L	3	32	2,5	8	110	66	33	SX .3..	161,10	**203**
XLCF R 3208-SX3	R	3	32	2,5	8	110	66	33	SX .3..	161,10	**003**
XLCF L 3208-SX4	L	4	32	3,4	8	110	66	33	SX .4..	161,10	**204**
XLCF R 3208-SX4	R	4	32	3,4	8	110	66	33	SX .4..	161,10	**004**

1) can be used in both directions

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .3..	SX 2-3	33,63	**836**
SX .4..	SX 4-6	34,31	**837**

Please order SX assembly key separately if required.


→ 14–20

→ 85+86

→ **Chapter 16**

→ **Chapter 16**

MonoClamp – SX-DC reinforced Contra radial blade

Scope of supply:
Blade only

Direct Cooling

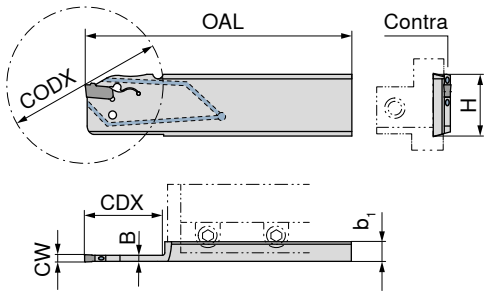

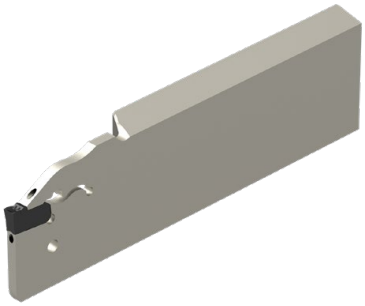

Illustrations show right-hand versions

ISO designation	R/L/N	Version	CW mm	H mm	B mm	b_1 mm	OAL mm	CODX mm	CDX mm	for grooving inserts	70 877 ... EUR 2A/25	
XLCF L 3208C-DC-SX3	L	Contra	3	32	2,5	8	110	66	33	SX .3..	206,90	**703**
XLCF R 3208C-DC-SX3	R	Contra	3	32	2,5	8	110	66	33	SX .3..	206,90	**503**

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .3..	SX 2-3	33,63	**836**

Please order SX assembly key separately if required.



→ 14–20 | → 84 | → **Chapter 16** | → **Chapter 16**

Correct Tool Selection

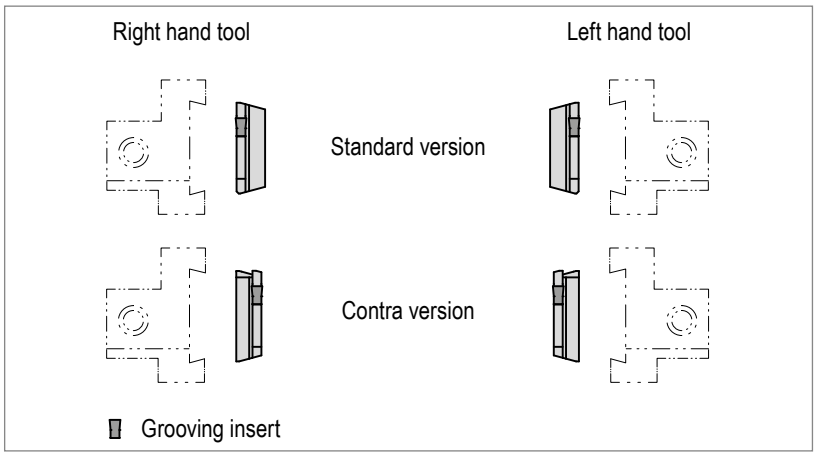





MonoClamp – SX reinforced Contra radial blade

Scope of supply:
Blade only

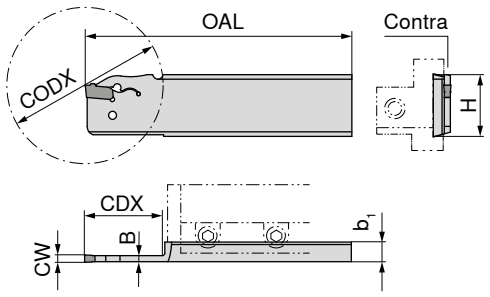

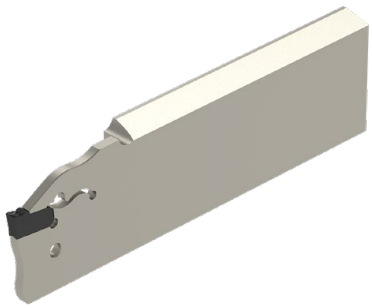

Illustrations show right-hand versions

ISO designation	R/L/N	Version	CW mm	H mm	B mm	b_1 mm	OAL mm	CODX mm	CDX mm	for grooving inserts	70 877 ... EUR 2A/25	
XLCF L 3208C-SX3	L	Contra	3	32	2,5	8	110	66	33	SX .3..	161,10	**203**
XLCF R 3208C-SX3	R	Contra	3	32	2,5	8	110	66	33	SX .3..	161,10	**003**

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .3..	SX 2-3	33,63	**836**

Please order SX assembly key separately if required.

→ 14–20 | → 85+86 | → **Chapter 16** | → **Chapter 16**

11

MonoClamp – Radial Monoholder SX-DC

Scope of supply:
Mono holder incl. screw plug and grub screw

Direct Cooling

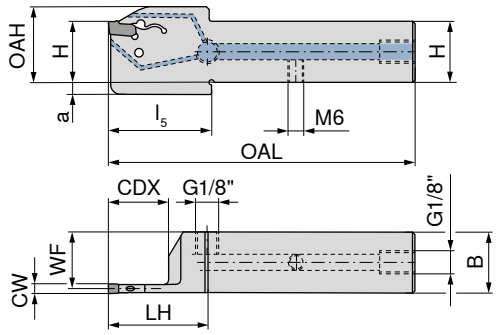

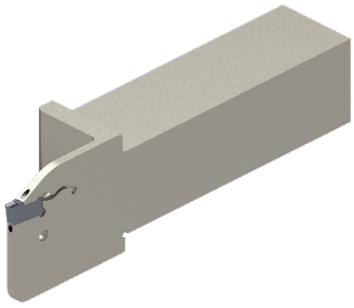

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAL mm	LH mm	l_5 mm	OAH mm	CDX mm	a mm	for grooving inserts	Left-hand 70 847 ... EUR 2C/71		Right-hand 70 847 ... EUR 2C/71	
E12 R/L 0022-1212X-K-DC-SX2	12	12	2	11,20	71	27	28	22	22	5	SX .2..	184,80	**21201**	184,80	**21200**
E16 R/L 0026-1616X-K-DC-SX2	16	16	2	15,20	87	32	33	26	26	4	SX .2..	195,20	**21601**	195,20	**21600**
E16 R/L 0026-1616X-K-DC-SX3	16	16	3	14,75	87	32	33	26	26	4	SX .3..	195,20	**31601**	195,20	**31600**
E20 R/L 0026-2020X-K-DC-SX2	20	20	2	19,20	102	32	33	31	26	5	SX .2..	221,30	**22001**	221,30	**22000**
E20 R/L 0026-2020X-K-DC-SX3	20	20	3	18,75	102	32	33	31	26	5	SX .3..	221,30	**32001**	221,30	**32000**
E20 R/L 0033-2020X-K-DC-SX4	20	20	4	18,30	109	39	40	32	33	5	SX .4..	221,30	**42001**	221,30	**42000**
E25 R/L 0033-2525X-K-DC-SX2	25	25	2	24,20	126	41	42	36	33	5	SX .2..	238,20	**22501**	238,20	**22500**
E25 R/L 0026-2525X-K-DC-SX3	25	25	3	23,75	117	33		31	26		SX .3..	238,20	**32501**	238,20	**32500**
E25 R/L 0033-2525X-K-DC-SX3	25	25	3	23,75	126	41	42	36	33	5	SX .3..	238,20	**32601**	238,20	**32600**
E25 R/L 0033-2525X-K-DC-SX4	25	25	4	23,30	126	41	42	36	33	5	SX .4..	238,20	**42501**	238,20	**42500**
E25 R/L 0040-2525X-K-DC-SX4	25	25	4	23,30	133	48	49	38	40	6	SX .4..	238,20	**42601**	238,20	**42600**
E25 R/L 0040-2525X-K-DC-SX5	25	25	5	22,85	133	48	49	38	40	6	SX .5..	238,20	**52501**	238,20	**52500**
E25 R/L 0040-2525X-K-DC-SX6	25	25	6	22,35	133	48	49	38	40	6	SX .6..	238,20	**62501**	238,20	**62500**

Ejector SX

Coolant screw plug

Grubscrew

Spare parts for grooving inserts	Ejector SX 70 950 ... EUR 2A/28		Coolant screw plug 70 950 ... EUR 2A/28		Grubscrew 70 950 ... EUR 2A/28	
SX .2..	SX 2-3	33,63 **836**	G 1/8"	4,59 **294**	M6x6	3,84 **86700**
SX .3..	SX 2-3	33,63 **836**	G 1/8"	4,59 **294**	M6x6	3,84 **86700**
SX .4..	SX 4-6	34,31 **837**	G 1/8"	4,59 **294**	M6x6	3,84 **86700**
SX .5..	SX 4-6	34,31 **837**	G 1/8"	4,59 **294**	M6x6	3,84 **86700**
SX .6..	SX 4-6	34,31 **837**	G 1/8"	4,59 **294**	M6x6	3,84 **86700**

Please order SX assembly key separately if required.



→ 14–20 → **Chapter 16**

MonoClamp – Radial Monoholder SX

Scope of supply:
Mono holder only

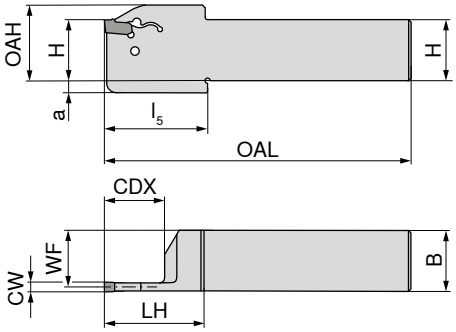

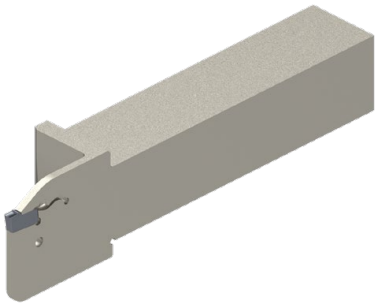

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAL mm	LH mm	l_5 mm	OAH mm	CDX mm	a mm	for grooving inserts	Left-hand 70 846 ... EUR 2C/71		Right-hand 70 846 ... EUR 2C/71	
E12 R/L 0022-1212K-K-SX2	12	12	2	11,20	125	27	28	22	22	5	SX .2..	124,90	**21201**	124,90	**21200**
E16 R/L 0026-1616K-K-SX2	16	16	2	15,20	125	32	33	26	26	4	SX .2..	127,40	**21601**	127,40	**21600**
E16 R/L 0026-1616K-K-SX3	16	16	3	14,75	125	32	33	26	26	4	SX .3..	127,40	**31601**	127,40	**31600**
E20 R/L 0026-2020K-K-SX2	20	20	2	19,20	125	32	33	31	26	5	SX .2..	149,70	**22001**	149,70	**22000**
E20 R/L 0026-2020K-K-SX3	20	20	3	18,75	125	32	33	31	26	5	SX .3..	149,70	**32001**	149,70	**32000**
E20 R/L 0033-2020K-K-SX4	20	20	4	18,30	125	39	40	32	33	5	SX .4..	149,70	**42001**	149,70	**42000**
E25 R/L 0033-2525M-K-SX2	25	25	2	24,20	150	41	42	36	33	5	SX .2..	158,80	**22501**	158,80	**22500**
E25 R/L 0033-2525M-K-SX3	25	25	3	23,75	150	41	42	36	33	5	SX .3..	158,80	**32601**	158,80	**32600**
E25 R/L 0026-2525M-K-SX3	25	25	3	23,75	150	33		31	26		SX .3..	158,80	**32501**	158,80	**32500**
E25 R/L 0040-2525M-K-SX4	25	25	4	23,30	150	48	49	38	40	6	SX .4..	158,80	**42601**	158,80	**42600**
E25 R/L 0033-2525M-K-SX4	25	25	4	23,30	150	41	42	37	33	5	SX .4..	158,80	**42501**	158,80	**42500**
E25 R/L 0040-2525M-K-SX5	25	25	5	22,85	150	48	49	38	40	6	SX .5..	158,80	**52501**	158,80	**52500**
E25 R/L 0040-2525M-K-SX6	25	25	6	22,35	150	48	49	38	40	6	SX .6..	158,80	**62501**	158,80	**62500**

Ejector SX

Spare parts for grooving inserts		70 950 ... EUR 2A/28	
SX .2..	SX 2-3	33,63	**836**
SX .3..	SX 2-3	33,63	**836**
SX .4..	SX 4-6	34,31	**837**
SX .5..	SX 4-6	34,31	**837**
SX .6..	SX 4-6	34,31	**837**

Please order SX assembly key separately if required.



→ 14–20 → **Chapter 16**

Insert LX

- ▲ Grooving width 8 and 10 mm
- ▲ Axial grooving from Ø 500 mm onwards
- ▲ Internal grooving and turning, from Ø 200 mm onwards



F	M	R



-M2 CTCP325	-M2 CTCP335	-M2 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN



Designation	INSL mm	CW -/+0,08 mm	RE +/-0,1 mm	PDPT mm	for tool holder	70 337 ... EUR 1A/15		70 337 ... EUR 1A/15		70 337 ... EUR 1A/15	
LXE 8.00N0.80-M2	19	8	0,8	5	E32 N ..-LX	24,70	**928**	24,70	**578**	24,70	**682**
LXE 10.00N0.80-M2	19	10	0,8	5	E32 N ..-LX	32,92	**932**	32,92	**582**	32,92	**678**
P							●		●		●
M							○		○		●
K							●		●		●
N											○
S							○				●
H											
O											○

→ v_c Page 88
→ Application recommendation on page 93

Internal machining

→ 32

External machining

→ 32 → 33

Radial Grooving Insert LX

- ▲ Grooving width 8 mm
- ▲ Axial grooving from Ø 500 mm
- ▲ Internal grooving and turning, from Ø 200 mm



F	M	R



-M3 CTCP325	-M3 CTCP335	-M3 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

Designation	INSL mm	CW -/+0,08 mm	CRE mm	PDPT mm	for tool holder	70 337 ... EUR 1A/15		70 337 ... EUR 1A/15		70 337 ... EUR 1A/15	
LXR 4.00N-M3	19	8	4	5	E32 N ..-LX	26,33	908	26,33	518	26,33	618
P							●		●		●
M							○		○		●
K							●		●		●
N											○
S							○				●
H											
O											○

→ v_c Page 88
→ Application recommendation on page 93

Internal machining

→ 32

External machining

→ 32
→ 33

11

ModularClamp MSS – Axial and radial grooving module LX

▲ Grooving width 8 and 10 mm
▲ Axial grooving from Ø 500 mm onwards
▲ Internal grooving and turning, from Ø 200 mm onwards

Scope of supply:
Grooving module only

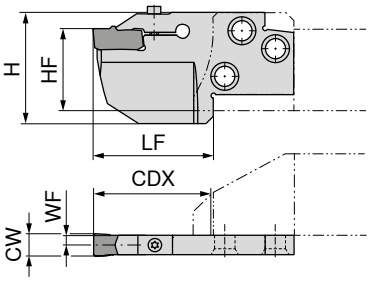

ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CDX (1) mm	CDX (2) mm	CDX (3) mm	for grooving inserts	Neutral 70 835 ... EUR 2C/71	
E32 N 25-LX	8 / 10	3,4	27	32	44	25	19	14	LX ..	121,20	**032**
E32 N 32-LX	8 / 10	3,4	34	32	44	32	26	21	LX ..	121,20	**132**
E32 N 45-LX	8 / 10	3,4	47	32	44	45	39	34	LX ..	121,20	**232**

Radial grooving



Axial grooving DAXN > 500 mm



Internal grooving DMIN > 200 mm

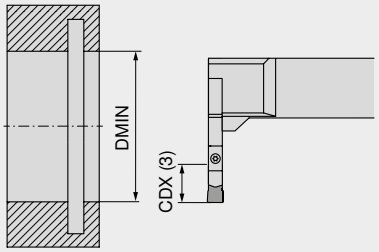

Key D

Clamping screw

Spare parts for grooving inserts		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
LX ..	T20	12,83	**114**	M4x18	6,14	**204**




→ 30+31 → 80+81 → 82 → 83

MonoClamp – Blade LX

Scope of supply:
Blade incl. key and clamping screw

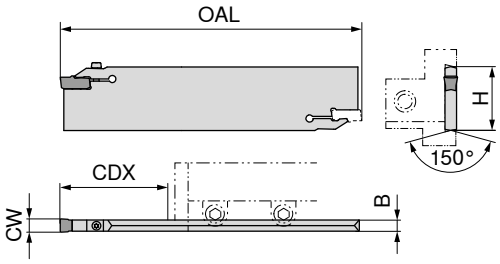

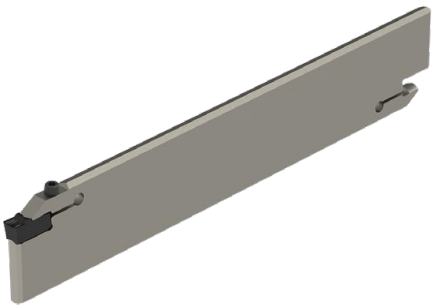

ISO designation	H mm	B mm	OAL mm	CW mm	CDX mm	for grooving inserts	70 833 ... EUR 2A/25	
XLCEN 4608-LX	46	6,8	250	8/10	80	LX ..	317,80	**108**

Key D

Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
LX ..	T20	12,83	**114**	M4x18	6,14	**204**



→ 30+31 → 85+86 → **Chapter 16**

11

Insert GX 09/16

▲ Insert with ground periphery
▲ Suitable also for parting off tubes and thin-walled workpieces

F	M	R





-F2
CTP1340

DRAGONSKIN



70 360 ...

Designation	INSL mm	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	EUR 1C/72	
GX 09-1 E2.00 N 0.20	9	2,0	0,2	1,5	GX 09-1	34,04	**600**
GX 09-1 E2.50 N 0.20	9	2,5	0,2	1,5	GX 09-1	34,04	**602**
GX 09-2 E3.00 N 0.30	9	3,0	0,3	2,0	GX 09-2	34,04	**604**
GX 16-1 E2.00 N 0.20	16	2,0	0,2	2,5	GX 16-1	34,62	**650**
GX 16-2 E3.00 N 0.30	16	3,0	0,3	3,0	GX 16-2	34,62	**652**
GX 16-3 E4.00 N 0.40	16	4,0	0,4	3,5	GX 16-3	37,91	**654**
GX 16-3 E5.00 N 0.40	16	5,0	0,4	3,5	GX 16-3	37,91	**656**

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 44+45

→ 49+50

→ 51

External machining

→ 42+43

→ 46–48

→ 51

Insert GX 09/16 – Standard

▲ Suitable for parting thin-walled workpieces

F	M	R





CTCP325	CTCP335	CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		

Designation	INSL mm	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 350 ... EUR 1C/72		70 350 ... EUR 1C/72		70 350 ... EUR 1C/72	
GX 09-1 E2.00 N 0.20	9	2,0	0,2	1,5	GX 09-1	34,04	**984**			34,04	**634**
GX 09-1 E2.50 N 0.20	9	2,5	0,2	1,5	GX 09-1	34,04	**988**			34,04	**638**
GX 09-2 E3.00 N 0.30	9	3,0	0,3	2,0	GX 09-2	34,04	**992**			34,04	**642**
GX 16-1 E2.00 N 0.20	16	2,0	0,2	2,5	GX 16-1	34,62	**900**	34,62	**500**	34,62	**600**
GX 16-1 E2.50 N 0.20	16	2,5	0,2	2,5	GX 16-1	34,62	**904**	34,62	**504**	34,62	**604**
GX 16-2 E3.00 N 0.30	16	3,0	0,3	3,0	GX 16-2	34,62	**908**	34,62	**508**	34,62	**608**
GX 16-2 E3.00 N 0.50	16	3,0	0,5	3,0	GX 16-2	34,62	**910**				
GX 16-2 E3.50 N 0.30	16	3,5	0,3	3,0	GX 16-2	34,62	**912**	34,62	**512**	34,62	**612**
GX 16-3 E4.00 N 0.40	16	4,0	0,4	3,5	GX 16-3	37,91	**916**	37,91	**516**	37,91	**616**
GX 16-3 E5.00 N 0.40	16	5,0	0,4	3,5	GX 16-3	37,91	**924**	37,91	**524**	37,91	**624**
GX 16-4 E6.00 N 0.50	16	6,0	0,5	4,0	GX 16-4	40,01	**928**			40,01	**628**
GX 16-4 E6.00 N 0.80	16	6,0	0,8	4,0	GX 16-4	40,01	**930**				

P	●	●	●
M	○	○	●
K	●	●	●
N			○
S	○		●
H			
O			○

→ v_c Page 88
→ Application recommendation on page 89

11

Internal machining

→ 44+45 | → 49+50 | → 51

External machining

→ 42+43 | → 46–48 | → 51

Insert GX 09/16

▲ Very good swarf control

F	M	R





-M40 CTCP325	-M40 CTPP345	-M40 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		
		

Designation	INSL mm	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 351 ... EUR 1C/72		70 351 ... EUR 1C/72		70 351 ... EUR 1C/72	
GX 09-1 E2.00 N 0.20	9	2	0,2	1,5	GX 09-1	22,24	**986**	22,24	**886**	22,24	**686**
GX 09-2 E3.00 N 0.30	9	3	0,3	2,0	GX 09-2	22,24	**994**	22,24	**894**	22,24	**694**
GX 16-1 E2.00 N 0.20	16	2	0,2	2,5	GX 16-1	22,52	**902**	22,52	**802**	22,52	**602**
GX 16-2 E3.00 N 0.30	16	3	0,3	3,0	GX 16-2	22,52	**910**	22,52	**810**	22,52	**610**
GX 16-3 E4.00 N 0.40	16	4	0,4	3,5	GX 16-3	25,07	**918**	25,07	**818**	25,07	**618**
GX 16-3 E5.00 N 0.40	16	5	0,4	3,5	GX 16-3	27,63	**926**	27,63	**826**	27,63	**626**
GX 16-4 E6.00 N 0.50	16	6	0,5	4,0	GX 16-4	30,14	**930**	30,14	**830**	30,14	**630**
P							●		●		●
M							○		●		●
K							●				●
N											○
S							○		○		●
H											
O											○

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 44+45

→ 49+50

→ 51

External machining

→ 42+43

→ 46–48

→ 51

Insert GX 16

▲ Very good swarf control



F	M	R





-M1 CTCP325	-M1 CTPP345	-M1 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

Designation	INSL mm	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 362 ... EUR 1C/72		70 362 ... EUR 1C/72		70 362 ... EUR 1C/72	
GX 16-1 E2.00 N 0.20	16	2	0,2	2,0	GX 16-1			22,52	**800**	22,52	**600**
GX 16-2 E3.00 N 0.20	16	3	0,2	2,5	GX 16-2	22,52	**902**	22,52	**802**	22,52	**602**
GX 16-3 E4.00 N 0.30	16	4	0,3	3,0	GX 16-3	25,07	**904**			25,07	**604**
P						●		●		●	
M						○		●		●	
K						●				●	
N										○	
S						○		○		●	
H											
O										○	

→ v_c Page 88
→ Application recommendation on page 90

Internal machining

→ 44+45

→ 50

→ 51

External machining

→ 42+43

→ 47+48

→ 51

11

Insert GX 16

▲ Insert with highly positive cutting edge geometry and sharp cutting edge
▲ ground periphery

F	M	R



-27P
H216T



70 350 ...

Designation	INSL mm	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	EUR 1C/72	
GX 16-1 E2.00 N 0.20	16	2	0,2	2,5	GX 16-1	26,26	**650**
GX 16-2 E3.00 N 0.30	16	3	0,3	3,0	GX 16-2	26,26	**658**
GX 16-3 E4.00 N 0.40	16	4	0,4	3,5	GX 16-3	28,65	**670**
GX 16-4 E6.00 N 0.50	16	6	0,5	4,0	GX 16-4	30,14	**678**

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 44+45 | → 50 | → 51

External machining

→ 42+43 | → 47+48 | → 51

Circlip groove insert GX 09/16 – Standard

F	M	R

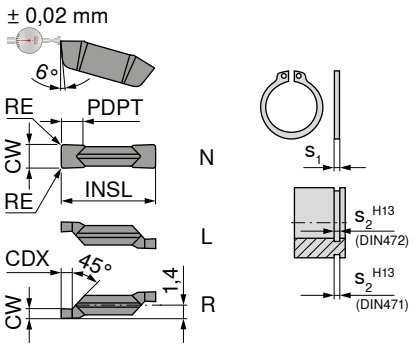



Designation	IH	INSL mm	s_1 mm	s_2 mm	CW +/-0,02 mm	RE +/-0,05 mm	CDX mm	PDPT mm	for tool holder	70 352 ... EUR 1C/72		70 352 ... EUR 1C/72	
GX 09-1 S1.00 L	L	9	0,80	0,90	1,00		1,14		R/L 02-GX 09-1			34,04	**684**
GX 09-1 S1.20 L	L	9	1,00	1,10	1,20		1,34		R/L 02-GX 09-1			34,04	**686**
GX 09-1 S1.40 L	L	9	1,20	1,30	1,40		1,53		R/L 02-GX 09-1			34,04	**688**
GX 09-1 S1.70 L	L	9	1,50	1,60	1,70		1,82		R/L 02-GX 09-1			34,04	**690**
GX 09-1 S1.95 N	N	9	1,75	1,85	1,95	0,1		2,0	GX 09-1	34,04	**692**		
GX 09-1 S2.25 N	N	9	2,00	2,15	2,25	0,1		2,0	GX 09-1	34,04	**694**		
GX 09-2 S2.75 N	N	9	2,50	2,65	2,75	0,1		2,0	GX 09-2	34,04	**696**		
GX 09-2 S3.25 N	N	9	3,00	3,15	3,25	0,1		2,0	GX 09-2	34,04	**698**		
GX 09-1 S1.00 R	R	9	0,80	0,90	1,00		1,14		R/L 02-GX 09-1			34,04	**676**
GX 09-1 S1.20 R	R	9	1,00	1,10	1,20		1,34		R/L 02-GX 09-1			34,04	**678**
GX 09-1 S1.40 R	R	9	1,20	1,30	1,40		1,53		R/L 02-GX 09-1			34,04	**680**
GX 09-1 S1.70 R	R	9	1,50	1,60	1,70		1,82		R/L 02-GX 09-1			34,04	**682**
GX 16-2 S0.60 L	L	16	0,40	0,50	0,60		0,75		R/L 03-GX 16-2			34,62	**607**
GX 16-2 S0.80 L	L	16	0,60	0,70	0,80		0,94		R/L 03-GX 16-2			34,62	**609**
GX 16-2 S0.90 L	L	16	0,70	0,80	0,90		1,04		R/L 03-GX 16-2			34,62	**611**
GX 16-2 S1.00 L	L	16	0,80	0,90	1,00		1,14		R/L 03-GX 16-2			34,62	**612**
GX 16-2 S1.20 L	L	16	1,00	1,10	1,20		1,34		R/L 03-GX 16-2			34,62	**614**
GX 16-2 S1.40 L	L	16	1,20	1,30	1,40		1,53		R/L 03-GX 16-2			34,62	**616**
GX 16-2 S1.70 L	L	16	1,50	1,60	1,70		1,82		R/L 03-GX 16-2			34,62	**618**
GX 16-2 S1.95 L	L	16	1,75	1,85	1,95		2,07		R/L 03-GX 16-2			34,62	**620**
GX 16-2 S2.25 L	L	16	2,00	2,15	2,25		2,36		R/L 03-GX 16-2			34,62	**622**
GX 16-2 S2.75 N	N	16	2,50	2,65	2,75	0,1		3,0	GX 16-2	34,62	**624**		
GX 16-2 S3.25 N	N	16	3,00	3,15	3,25	0,1		3,0	GX 16-2	34,62	**626**		
GX 16-3 S4.25 N	N	16	4,00	4,15	4,25	0,2		3,5	GX 16-3	37,91	**628**		
GX 16-2 S0.60 R	R	16	0,40	0,50	0,60		0,75		R/L 03-GX 16-2			34,62	**695**
GX 16-2 S0.80 R	R	16	0,60	0,70	0,80		0,94		R/L 03-GX 16-2			34,62	**697**
GX 16-2 S0.90 R	R	16	0,70	0,80	0,90		1,04		R/L 03-GX 16-2			34,62	**699**
GX 16-2 S1.00 R	R	16	0,80	0,90	1,00		1,14		R/L 03-GX 16-2			34,62	**600**
GX 16-2 S1.20 R	R	16	1,00	1,10	1,20		1,34		R/L 03-GX 16-2			34,62	**602**
GX 16-2 S1.40 R	R	16	1,20	1,30	1,40		1,53		R/L 03-GX 16-2			34,62	**604**
GX 16-2 S1.70 R	R	16	1,50	1,60	1,70		1,82		R/L 03-GX 16-2			34,62	**606**
GX 16-2 S1.95 R	R	16	1,75	1,85	1,95		2,07		R/L 03-GX 16-2			34,62	**608**
GX 16-2 S2.25 R	R	16	2,00	2,15	2,25		2,36		R/L 03-GX 16-2			34,62	**610**

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O	○	○

→ v_c Page 88
→ Application recommendation on page 90

Attention – applies only to internal machining:
Right-hand insert → left-hand module or monobloc boring bar
Left-hand insert → right-hand module or monobloc boring bar

Internal machining

→ 44+45 → 49+50 → 51

External machining

→ 42+43 → 46–48 → 51

Radius groove insert GX 09/16 – Standard

F	M	R



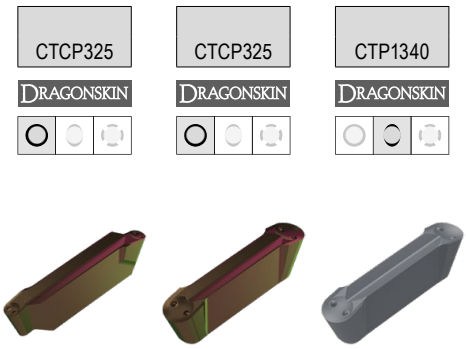

Designation	IH	INSL mm	CW +/-0,02 mm	CRE mm	PDPT mm	CDX mm	for tool holder	70 354 ... EUR 1C/72		70 354 ... EUR 1C/72		70 354 ... EUR 1C/72	
GX 09-1 R1.00 N	N	9	2,0	1,0	1,0		GX 09-1			41,04	**992**		
GX 09-1 R1.20 N	N	9	2,4	1,2	1,2		GX 09-1			41,04	**996**		
GX 16-2 R0.80 L	L	16	1,6	0,8		1,78	R/L 03-GX 16-2	42,09	**912**				
GX 16-2 R1.00 L	L	16	2,0	1,0		2,18	R/L 03-GX 16-2	42,09	**916**				
GX 16-2 R1.20 L	L	16	2,4	1,2		2,58	R/L 03-GX 16-2	42,09	**920**				
GX 16-2 R1.50 N	N	16	3,0	1,5	1,5		GX 16-2			42,09	**924**	42,09	**624**
GX 16-3 R2.00 N	N	16	4,0	2,0	2,0		GX 16-3			45,69	**928**	45,69	**628**
GX 16-3 R2.50 N	N	16	5,0	2,5	2,5		GX 16-3			45,69	**932**	45,69	**632**
GX 16-4 R3.00 N	N	16	6,0	3,0	3,0		GX 16-4			47,79	**936**	47,79	**636**
GX 16-2 R0.80 R	R	16	1,6	0,8		1,78	R/L 03-GX 16-2	42,09	**900**				
GX 16-2 R1.00 R	R	16	2,0	1,0		2,18	R/L 03-GX 16-2	42,09	**904**				
GX 16-2 R1.20 R	R	16	2,4	1,2		2,58	R/L 03-GX 16-2	42,09	**908**				
P								●		●		●	
M								○		○		●	
K								●		●		●	
N												○	
S								○		○		●	
H													
O												○	

→ v_c Page 88
→ Application recommendation on page 90

Attention – applies only to internal machining:
Right-hand insert → left-hand module or monobloc boring bar
Left-hand insert → right-hand module or monobloc boring bar

Internal machining

→ 44+45

→ 49+50

→ 51

External machining

→ 42+43

→ 46–48

→ 51

Radius groove insert GX 16

▲ Insert with highly positive cutting edge geometry and sharp cutting edge
▲ ground periphery

F	M	R





-27P
H216T

70 354 ...

Designation	INSL mm	CW +/-0,02 mm	CRE mm	PDPT mm	for tool holder	EUR 1C/72	
GX 16-2 R1.50 N	16	3	1,5	1,5	GX 16-2	31,63	**674**
GX 16-3 R2.00 N	16	4	2,0	2,0	GX 16-3	34,20	**678**
GX 16-3 R2.50 N	16	5	2,5	2,5	GX 16-3	34,20	**682**

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 88
→ Application recommendation on page 90

Internal machining

→ 44+45

→ 50

→ 51

External machining

→ 42+43

→ 47–48

→ 51

11

ModularClamp MSS – Radial grooving module GX 09/16

▲ For circlip grooves ≤ 2,75 mm
▲ For radius grooves up to ≤ 1,2 mm
▲ For external recessing

Scope of supply:
Grooving module only





Illustrations show right-hand versions

ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand 70 871 ... EUR 2C/71		Right-hand 70 870 ... EUR 2C/71	
E16 R/L 02-GX 09-1	<1,95	3,15	8	16	19,5	48	2	GX 09-1 ..R/L	108,60	**116**	108,60	**116**
E20 R/L 03-GX 16-2	<2,75	3,40	13	20	24,0	60	3	GX 16-2 ..R/L	108,60	**120**	108,60	**120**
E25 R/L 03-GX 16-2	<2,75	4,90	13	25	30,0	75	3	GX 16-2 ..R/L	109,40	**125**	109,40	**125**

→ 34–41


→ 80+81

→ 82

ModularClamp MSS – Radial grooving module GX 09/16

▲ For grooving and turning
▲ For circlip grooves ≤ 5,25 mm
▲ For radius grooves up to ≤ 2,5 mm
▲ For external recessing

Scope of supply:
Grooving module only





									Left-hand		Right-hand	
									70 866 ...		**70 865 ...**	
ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CODX mm	CDX mm	for grooving inserts	**EUR** 2C/71		**EUR** 2C/71	
E16 R/L 07-GX 09-1	2,00 - 2,75	3,15	8	16	19,5	48	7	GX 09-1 ..N	108,60	**016**	108,60	**016**
E16 R/L 07-GX 09-2	2,76 - 3,75	2,80	8	16	19,5	48	7	GX 09-2 ..N	108,60	**116**	108,60	**116**
E20 R/L 12-GX 16-1	2,00 - 2,75	3,75	13	20	24,0	60	12	GX 16-1 ..N	108,60	**020**	108,60	**020**
E20 R/L 12-GX 16-2	2,76 - 3,75	3,40	13	20	24,0	60	12	GX 16-2 ..N	108,60	**120**	108,60	**120**
E20 R/L 12-GX 16-3	3,76 - 5,00	2,93	13	20	24,0	60	12	GX 16-3 ..N	108,60	**220**	108,60	**220**
E25 R/L 12-GX 16-1	2,00 - 2,75	5,25	13	25	30,0	75	12	GX 16-1 ..N	109,40	**025**	109,40	**025**
E25 R/L 12-GX 16-2	2,76 - 3,75	4,90	13	25	30,0	75	12	GX 16-2 ..N	109,40	**125**	109,40	**125**
E25 R/L 12-GX 16-3	3,76 - 5,00	4,43	13	25	30,0	75	12	GX 16-3 ..N	109,40	**225**	109,40	**225**
E25 R/L 12-GX 16-4	5,01 - 6,50	3,80	13	25	30,0	75	12	GX 16-4 ..N	109,40	**325**	109,40	**325**



→ 34–41 → 80+81 → 82

11

ModularClamp MSS – Radial Grooving module GX 09/16 for Internal machining

▲ For circlip grooves ≤ 2,75 mm
▲ For radius grooves up to ≤ 1,2 mm

Scope of supply:
Grooving module only





Illustrations show right-hand versions

ISO designation	CW mm	LB mm	WF mm	H mm	CDX mm	DMIN mm	for grooving inserts	Left-hand 70 886 ... EUR 2C/71		Right-hand 70 885 ... EUR 2C/71	
I16 R/L 02-GX 09-1	<1,95	3,8	10,0	16,4	2	20	GX 09-1 ..R/L	108,60	**016**	108,60	**016**
I20 R/L 02-GX 09-1	<1,95	3,8	12,0	20,3	2	25	GX 09-1 ..R/L	108,60	**020**	108,60	**020**
I25 R/L 02-GX 09-1	<1,95	3,8	15,5	24,9	2	32	GX 09-1 ..R/L	109,40	**025**	109,40	**025**
I32 R/L 03-GX 16-2	<2,75	5,9	20,0	32,2	3	40	GX 16-2 ..R/L	110,50	**032**	110,50	**032**
I40 R/L 03-GX 16-2	<2,75	5,9	24,5	39,6	3	50	GX 16-2 ..R/L	111,40	**040**	111,40	**040**

Right hand module → left hand insert only
Left hand module → right hand insert only

→ 34–41

→ 83

ModularClamp MSS – Radial Grooving module GX 09/16 for Internal machining

▲ For circlip grooves ≤ 5,25 mm
▲ For radius grooves up to ≤ 2,5 mm

Scope of supply:
Grooving module only



Illustrations show right-hand versions

ISO designation	CW mm	LB mm	WF mm	H mm	CDX mm	DMIN mm	for grooving inserts	Left-hand 70 881 ... EUR 2C/71		Right-hand 70 880 ... EUR 2C/71	
I16 R/L 04-GX 09-1	2,00 - 2,75	3,8	10,0	16,4	4	20	GX 09-1 ..N	108,60	**017**	108,60	**017**
I16 R/L 04-GX 09-2	2,76 - 3,75	3,8	10,0	16,4	4	20	GX 09-2 ..N	108,60	**117**	108,60	**117**
I20 R/L 05-GX 09-1	2,00 - 2,75	3,8	12,0	20,3	5	25	GX 09-1 ..N	108,60	**021**	108,60	**021**
I20 R/L 05-GX 09-2	2,76 - 3,75	3,8	12,0	20,3	5	25	GX 09-2 ..N	108,60	**121**	108,60	**121**
I25 R/L 06-GX 09-1	2,00 - 2,75	3,8	15,5	24,9	6	32	GX 09-1 ..N	109,40	**026**	109,40	**026**
I25 R/L 06-GX 09-2	2,76 - 3,75	3,8	15,5	24,9	6	32	GX 09-2 ..N	109,40	**126**	109,40	**126**
I32 R/L 09-GX 16-1	2,00 - 2,75	5,9	20,0	32,2	9	40	GX 16-1 ..N	110,50	**033**	110,50	**033**
I32 R/L 09-GX 16-2	2,76 - 3,75	5,9	20,0	32,2	9	40	GX 16-2 ..N	110,50	**133**	110,50	**133**
I32 R/L 09-GX 16-3	3,76 - 5,00	5,9	20,0	32,2	9	40	GX 16-3 ..N	110,50	**233**	110,50	**233**
I32 R/L 09-GX 16-4	5,01 - 6,50	5,9	20,0	32,2	9	40	GX 16-4 ..N	110,50	**333**	110,50	**333**
I40 R/L 10-GX 16-1	2,00 - 2,75	5,9	24,5	39,6	10	50	GX 16-1 ..N	111,40	**041**	111,40	**041**
I40 R/L 10-GX 16-2	2,76 - 3,75	5,9	24,5	39,6	10	50	GX 16-2 ..N	111,40	**141**	111,40	**141**
I40 R/L 10-GX 16-3	3,76 - 5,00	5,9	24,5	39,6	10	50	GX 16-3 ..N	111,40	**241**	111,40	**241**
I40 R/L 10-GX 16-4	5,01 - 6,50	5,9	24,5	39,6	10	50	GX 16-4 ..N	111,40	**341**	111,40	**341**

11

→ 34–41 → 83

MonoClamp – Radial Monoholder GX 09

Scope of supply:
Mono holder incl. Torx key and clamping screw

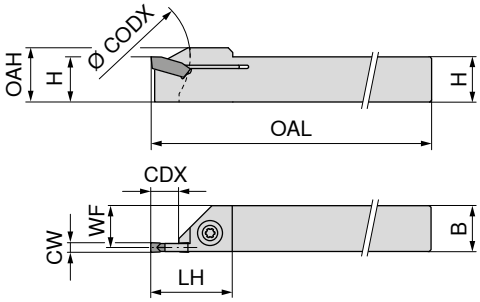

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	CODX mm	CDX mm	for grooving inserts	Left-hand 70 863 ... EUR 2C/71		Right-hand 70 862 ... EUR 2C/71	
E10 R/L 00-1010M-GX09	10	10	2,00 - 3,50	9,35	12	150	18	30	7	GX 09 ..	156,20	**010**	156,20	**010**

When using 'R' or 'L' tools the tool must be modified at the end face to ensure cutting clerance.



Key D

Clamping screw

Spare parts for grooving inserts		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
GX 09 ..	T15	11,96	**113**	M4x11	13,34 **442**



→ 34–40 → **Chapter 16**

MonoClamp – Radial Monoholder GX-DC 16

Scope of supply:
Mono holder incl. Torx key and clamping screw

Direct Cooling

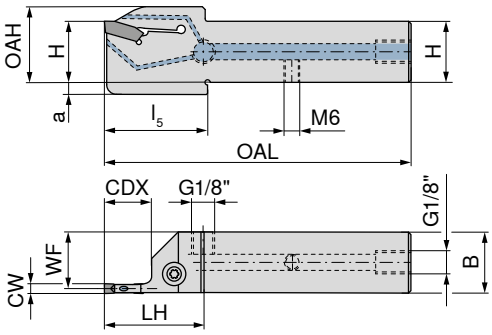

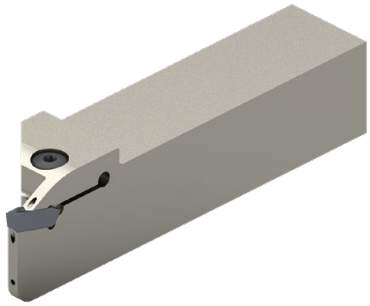

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	a mm	CDX mm	for grooving inserts	Left-hand 70 842 ... EUR 2C/71		Right-hand 70 842 ... EUR 2C/71	
E16 R/L 0013S2-1616X-S-DC-GX16	16	16	2	15,20	21	90	35	36	4	13	GX 16-1 E2..	186,40	**21601**	186,40	**21600**
E16 R/L 0013S3-1616X-S-DC-GX16	16	16	3	14,85	21	90	35	36	4	13	GX 16-2 E3..	186,40	**31601**	186,40	**31600**
E16 R/L 0013S4-1616X-S-DC-GX16	16	16	4	14,40	21	90	35	36	4	13	GX 16-3 E4..	186,40	**41601**	186,40	**41600**
E16 R/L 0013S5-1616X-S-DC-GX16	16	16	5	14,00	21	90	35	36	4	13	GX 16-3 E5..	186,40	**51601**	186,40	**51600**
E20 R/L 0013S2-2020X-S-DC-GX16	20	20	2	19,20	25	104	35			13	GX 16-1 E2..	214,60	**22001**	214,60	**22000**
E20 R/L 0013S3-2020X-S-DC-GX16	20	20	3	18,85	25	104	35			13	GX 16-2 E3..	214,60	**32001**	214,60	**32000**
E20 R/L 0013S4-2020X-S-DC-GX16	20	20	4	18,40	25	104	35			13	GX 16-3 E4..	214,60	**42001**	214,60	**42000**
E20 R/L 0013S5-2020X-S-DC-GX16	20	20	5	18,00	25	104	35			13	GX 16-3 E5..	214,60	**52001**	214,60	**52000**
E25 R/L 0013S3-2525X-S-DC-GX16	25	25	3	23,85	30	119	35			13	GX 16-2 E3..	228,30	**32501**	228,30	**32500**
E25 R/L 0013S4-2525X-S-DC-GX16	25	25	4	23,40	30	119	35			13	GX 16-3 E4..	228,30	**42501**	228,30	**42500**
E25 R/L 0013S5-2525X-S-DC-GX16	25	25	5	23,00	30	119	35			13	GX 16-3 E5..	228,30	**52501**	228,30	**52500**

Key D

Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
GX 16-1 E2..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 16-2 E3..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 16-3 E4..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 16-3 E5..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**

→ 34–41

→ **Chapter 16**

11

MonoClamp – Radial Monoholder GX 16

Scope of supply:
Mono holder incl. Torx key and clamping screw

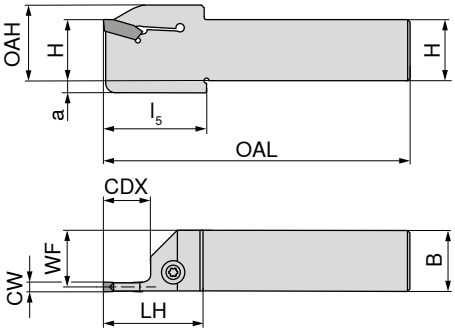

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	a mm	CDX mm	for grooving inserts	Left-hand 70 843 ... EUR 2C/71		Right-hand 70 843 ... EUR 2C/71	
E12 R/L 0013S2-1212K-S-GX16	12	12	2	11,20	17	125	25	26	4	13	GX 16-1 E2..	115,20	**21201**	115,20	**21200**
E12 R/L 0013S3-1212K-S-GX16	12	12	3	10,85	17	125	25	26	4	13	GX 16-2 E3..	115,20	**31201**	115,20	**31200**
E16 R/L 0013S2-1616K-S-GX16	16	16	2	15,20	21	125	25	26	4	13	GX 16-1 E2..	123,00	**21601**	123,00	**21600**
E16 R/L 0013S3-1616K-S-GX16	16	16	3	14,85	21	125	25	26	4	13	GX 16-2 E3..	123,00	**31601**	123,00	**31600**
E16 R/L 0013S4-1616K-S-GX16	16	16	4	14,40	21	125	25	26	4	13	GX 16-3 E4..	123,00	**41601**	123,00	**41600**
E16 R/L 0013S5-1616K-S-GX16	16	16	5	14,00	21	125	25	26	4	13	GX 16-3 E5..	123,00	**51601**	123,00	**51600**
E20 R/L 0013S2-2020K-S-GX16	20	20	2	19,20	25	125	25			13	GX 16-1 E2..	141,70	**22001**	141,70	**22000**
E20 R/L 0013S3-2020K-S-GX16	20	20	3	18,85	25	125	25			13	GX 16-2 E3..	141,70	**32001**	141,70	**32000**
E20 R/L 0013S4-2020K-S-GX16	20	20	4	18,40	25	125	25			13	GX 16-3 E4..	141,70	**42001**	141,70	**42000**
E20 R/L 0013S5-2020K-S-GX16	20	20	5	18,00	25	125	25			13	GX 16-3 E5..	141,70	**52001**	141,70	**52000**
E25 R/L 0013S3-2525M-S-GX16	25	25	3	23,85	30	150	25			13	GX 16-2 E3..	150,70	**32501**	150,70	**32500**
E25 R/L 0013S4-2525M-S-GX16	25	25	4	23,40	30	150	25			13	GX 16-3 E4..	150,70	**42501**	150,70	**42500**
E25 R/L 0013S5-2525M-S-GX16	25	25	5	23,00	30	150	25			13	GX 16-3 E5..	150,70	**52501**	150,70	**52500**

When using 'R' or 'L' tools the tool must be modified at the end face to ensure cutting clerance.



Key D

Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
GX 16-1 E2..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 16-2 E3..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 16-3 E4..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 16-3 E5..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**



→ 34–41 → **Chapter 16**

MonoClamp – Radial Mono-boring bars GX 09

Scope of supply:
Boring bar incl. key and clamping screw

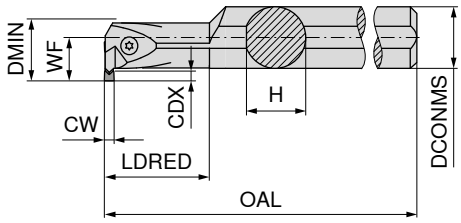

Illustrations show right-hand versions

										Left-hand		Right-hand	
										70 859 ...		**70 858 ...**	
ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	**EUR** 2C/71		**EUR** 2C/71	
I12 R/L 90-2,5D-GX09	15,25	16	16	2,00 - 3,75	3	11	150	30	GX 09 ..	191,40	**012**	191,40	**012**

Right hand boring bar → left hand insert only
Left hand boring bar → right hand insert only

When using „R“ or „L“ tools the insert support seat requires modification to prevent the insert fouling.



Key D

Clamping screw

		80 950 ...			**70 950 ...**	
Spare parts for grooving inserts		**EUR** Y7			**EUR** 2A/28	
GX 09 ..	T15	11,96	**113**	M3,5x12,5	11,57	**441**



→ 34–40 → **Chapter 16**

MonoClamp – Radial Mono-boring bars GX 16

Scope of supply:
Boring bar incl. key and clamping screw

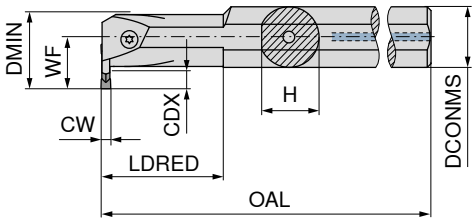

Illustrations show right-hand versions

										Left-hand		Right-hand	
										70 893 ...		**70 892 ...**	
ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	**EUR** 2C/71		**EUR** 2C/71	
I16 R/L 90-2.0D-GX16-1	15,25	16	20,5	2,00 - 2,75	5,0	13,5	150	32	GX 16-1	168,60	**516**	168,60	**516**
I16 R/L 90-2.0D-GX16-2	15,25	16	20,5	2,76 - 3,75	5,0	13,5	150	32	GX 16-2	168,60	**616**	168,60	**616**
I20 R/L 90-2.0D-GX16-2	19,00	20	25,0	2,76 - 3,75	5,5	15,5	180	40	GX 16-2	182,10	**620**	182,10	**620**
I25 R/L 90-2.0D-GX16-2	24,00	25	32,0	2,76 - 3,75	8,0	20,5	200	50	GX 16-2	211,70	**625**	211,70	**625**
I25 R/L 90-2.0D-GX16-3	24,00	25	32,0	3,76 - 5,00	10,0	22,5	200	50	GX 16-3	211,70	**725**	211,70	**725**
I32 R/L 90-2.0D-GX16-2	31,00	32	42,0	2,76 - 3,75	11,0	27,5	250	64	GX 16-2	246,10	**632**	246,10	**632**
I32 R/L 90-2.0D-GX16-3	31,00	32	42,0	3,76 - 5,00	11,0	27,5	250	64	GX 16-3	246,10	**732**	246,10	**732**

Right hand boring bar⟶ left hand insert only
Left hand boring bar⟶ right hand insert only

When using „R“ or „L“ tools the insert support seat requires modification to prevent the insert fouling.



Key D

Clamping screw

Spare parts for grooving inserts							
		80 950 ...			**70 950 ...**		
		EUR Y7			**EUR** 2A/28		
GX 16-1	T15	11,96	**113**	M4x14	11,07	**403**
GX 16-2	T15	11,96	**113**	M4x14	11,07	**403**
GX 16-3	T15	11,96	**113**	M4x14	11,07	**403**

→ 34–41 → **Chapter 16**

MaxiChange-GX – GX-DC 16 exchangeable grooving head

▲ For grooving and turning

Scope of supply:
Exchangeable grooving head with clamping claw and clamping screw

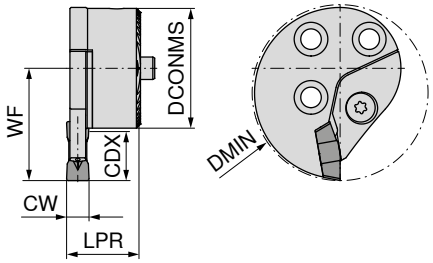



Illustrations show right-hand versions

ISO designation	DCONMS mm	CW mm	WF mm	LPR mm	DMIN mm	CDX mm	for grooving inserts	NEW Left-hand 84 188 ... EUR Y8		NEW Right-hand 84 189 ... EUR Y8	
WK25 R/L 14-DC GX 16-S2	25	2	27	14,00	41	14	GX 16-1 ..N	176,20	**22500**	176,20	**22500**
WK25 R/L 14-DC GX 16-S3	25	3	27	14,75	41	14	GX 16-2 ..N	176,20	**32500**	176,20	**32500**
WK25 R/L 14-DC GX 16-S4/5	25	4/5	27	15,75	41	14	GX 16-3 ..N	176,20	**42500**	176,20	**42500**
WK32 R/L 13-DC GX 16-S4/5	32	4/5	30	17,75	47	13	GX 16-3 ..N	185,90	**43200**	185,90	**43200**
WK32 R/L 13-DC GX 16-S6	32	6	30	19,35	47	13	GX 16-3 ..N	185,90	**63200**	185,90	**63200**

Clamping claw

O-Ring

Clamping screw

Guide pin

Spare parts for Article no.	Clamping claw 84 950 ... EUR Y8		O-Ring 84 950 ... EUR Y8		Clamping screw 84 950 ... EUR Y8		Guide pin 84 950 ... EUR Y8	
84 189 22500	39,57	**50400**	3,14	**50300**	5,89	**50000**	3,70	**53000**
84 188 22500	39,57	**50500**	3,14	**50300**	5,89	**50000**	3,70	**53000**
84 189 32500	39,57	**50600**	3,14	**50300**	5,89	**50000**	3,70	**53000**
84 188 32500	39,57	**50700**	3,14	**50300**	5,89	**50000**	3,70	**53000**
84 189 42500	39,57	**50800**	3,14	**50300**	5,89	**50000**	3,70	**53000**
84 188 42500	39,57	**50900**	3,14	**50300**	5,89	**50000**	3,70	**53000**
84 189 43200	42,97	**51000**	3,14	**50300**	6,22	**50100**	3,70	**53100**
84 188 43200	42,97	**51100**	3,14	**50300**	6,22	**50100**	3,70	**53100**
84 189 63200	42,97	**51200**	3,14	**50300**	6,22	**50100**	3,70	**53100**
84 188 63200	42,97	**51300**	3,14	**50300**	6,22	**50100**	3,70	**53100**

Spare parts for Article no.	Clamping claw 84 950 ... EUR Y8		O-Ring 84 950 ... EUR Y8		Clamping screw 84 950 ... EUR Y8		Guide pin 84 950 ... EUR Y8	
2x1					M4X4/T15		D3H6X10	
2x1					M4X4/T15		D3H6X10	
2x1					M4X4/T15		D3H6X10	
2x1					M4X4/T15		D3H6X10	
2x1					M4X4/T15		D3H6X10	
2x1					M4X4/T15		D3H6X10	
2x1					M5X5,5/T15		D4H6X10	
2x1					M5X5,5/T15		D4H6X10	
2x1					M5X5,5/T15		D4H6X10	
2x1					M5X5,5/T15		D4H6X10	



→ 34–41 → **Chapter 9**

11

Insert GX 24

▲ Insert with ground periphery
▲ Suitable also for parting off tubes and thin-walled workpieces



F	M	R



-F2 CTCP325	-F2 CTPP345	-F2 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN

Designation	INSL mm	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 350 ... EUR 1C/72		70 350 ... EUR 1C/72		70 350 ... EUR 1C/72	
GX 24-2 E3.00 N 0.30	24	3,0	0,3	2,5	GX 24-2	35,68	**962**	35,68	**862**	35,68	**662**
GX 24-2 E3.50 N 0.30	24	3,5	0,3	2,5	GX 24-2			35,68	**864**		
GX 24-3 E4.00 N 0.40	24	4,0	0,4	3,0	GX 24-3	38,49	**966**	38,49	**866**	38,49	**666**
GX 24-3 E5.00 N 0.40	24	5,0	0,4	3,5	GX 24-3	42,24	**970**	42,24	**870**	42,24	**671**
GX 24-4 E6.00 N 0.50	24	6,0	0,5	4,0	GX 24-4			46,43	**872**	46,43	**672**
P							●		●		●
M							○		●		●
K							●				●
N											○
S							○		○		●
H											
O											○

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 63 | → 67+68

External machining



→ 60–62 | → 64 | → 65+66 | → 69 | → 70

Insert GX 24

▲ Universal application
▲ First choice for axial grooving



F	M	R



-E CTCP325	-E CTCP335	-E CTPP345	-E CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
			

Designation	INSL mm	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 350 ... EUR 1C/72		70 350 ... EUR 1C/72		70 350 ... EUR 1C/72		70 350 ... EUR 1C/72	
GX 24-2 E3.00 N 0.30	24	3	0,3	2,5	GX 24-2	24,00	**932**	24,00	**532**	24,00	**832**	24,00	**632**
GX 24-3 E4.00 N 0.40	24	4	0,4	3,0	GX 24-3	26,26	**936**	26,26	**536**	26,26	**836**	26,26	**636**
GX 24-3 E5.00 N 0.40	24	5	0,4	3,0	GX 24-3	28,65	**940**	28,65	**540**	28,65	**840**	28,65	**640**
GX 24-4 E6.00 N 0.50	24	6	0,5	3,5	GX 24-4	31,50	**944**	31,50	**544**	31,50	**844**	31,50	**644**

P	●	●	●	●
M	○	○	●	●
K	●	●		●
N				○
S	○		○	●
H				
O				○

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 63

→ 67+68

External machining

→ 60–62


→ 64

→ 65+66

→ 69

→ 70

Insert GX 24

▲ Very good swarf control



F	M	R



-M1 CTCP325	-M1 CTPP345	-M1 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		

Designation	INSL mm	CW +/-0,05 mm	RE +/-0,05 mm	for tool holder	70 363 ... EUR 1C/72		70 363 ... EUR 1C/72		70 363 ... EUR 1C/72	
GX 24-1 E2.00 N 0.20	24	2	0,2	GX 24-1	24,00	**900**	24,00	**800**	24,00	**600**
GX 24-2 E3.00 N 0.20	24	3	0,2	GX 24-2	24,00	**902**	24,00	**802**	24,00	**602**
GX 24-3 E4.00 N 0.30	24	4	0,3	GX 24-3	26,26	**904**	26,26	**804**	26,26	**604**
P						●		●		●
M						○		●		●
K						●				●
N										○
S						○		○		●
H										
O										○

→ v_c Page 88
→ Application recommendation on page 90

Internal machining

→ 63 | → 67+68

External machining

→ 60–63 | → 64 | → 65+66 | → 69

Insert GX 24

▲ Very good swarf control



F	M	R



-M40 CTCP325	-M40 CTPP345	-M40 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		

Designation	INSL mm	CW +/-0,05 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 364 ... EUR 1C/72		70 364 ... EUR 1C/72		70 364 ... EUR 1C/72	
GX 24-2 E3.00 N 0.30	24	3	0,3	3,5	GX 24-2	24,00	**900**	24,00	**800**	24,00	**600**
GX 24-3 E4.00 N 0.40	24	4	0,4	4,0	GX 24-3	26,26	**902**	26,26	**802**	26,26	**602**
GX 24-3 E5.00 N 0.40	24	5	0,4	4,0	GX 24-3	28,65	**904**	28,65	**804**	28,65	**604**
GX 24-4 E6.00 N 0.50	24	6	0,5	4,0	GX 24-4	31,50	**906**	31,50	**806**	31,50	**606**
P						●		●		●	
M						○		●		●	
K						●				●	
N										○	
S						○		○		●	
H											
O										○	

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 63

→ 67+68

External machining

→ 60–63

→ 64

→ 65+66

→ 69

→ 70

11

Radius groove insert GX 24



F	M	R



-M3 CTCP325	-M3 CTCP335
DRAGONSKIN	DRAGONSKIN



Designation	INSL mm	CW +/-0,05 mm	CRE mm	PDPT mm	for tool holder	70 354 ... EUR 1C/72		70 354 ... EUR 1C/72	
GX 24-2 R1.50 N	24,4	3	1,5	1,5	GX 24-2	31,93	**952**	31,93	**552**
GX 24-3 R2.00 N	24,4	4	2,0	2,5	GX 24-3	34,20	**954**	34,20	**554**
GX 24-3 R2.50 N	24,4	5	2,5	3,0	GX 24-3	35,68	**956**	35,68	**556**
GX 24-4 R3.00 N	24,4	6	3,0	4,0	GX 24-4	38,35	**958**	38,35	**558**
P						●		●	
M						○		○	
K						●		●	
N									
S						○			
H									
O									

→ v_c Page 88
→ Application recommendation on page 90

Internal machining

→ 63 | → 67+68

External machining

→ 60–63 | → 64 | → 65+66 | → 69 | → 70

Radius groove insert GX 24

▲ Suitable for the machining of tough and ductile materials



F	M	R



-M33
CTCP325

DRAGONSKIN



70 365 ...

Designation	INSL mm	CW +/-0,05 mm	CRE mm	PDPT mm	for tool holder	EUR 1C/72	
GX 24-2 R1.50 N	24,4	3	1,5	1,5	GX 24-2	31,93	**95200**
GX 24-3 R2.00 N	24,4	4	2,0	2,5	GX 24-3	34,20	**95400**
GX 24-3 R2.50 N	24,4	5	2,5	3,0	GX 24-3	35,68	**95600**
GX 24-4 R3.00 N	24,4	6	3,0	4,0	GX 24-4	38,35	**95800**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c Page 88
→ Application recommendation on page 90

Internal machining

→ 63

→ 67+68

External machining

→ 60–63


→ 64

→ 65+66

→ 69

→ 70

Insert GX 24

▲ Insert with highly positive cutting edge geometry and sharp cutting edge
▲ ground periphery

F	M	R



-27P
H216T





Designation	INSL mm	CW +/-0,02 mm	RE +/-0,05 mm	PDPT mm	for tool holder	70 350 ... EUR 1C/72	
GX 24-2 E3.00 N 0.30	24	3	0,3	2,5	GX 24-2	28,65	**682**
GX 24-3 E4.00 N 0.40	24	4	0,4	3,0	GX 24-3	31,50	**684**
GX 24-3 E5.00 N 0.40	24	5	0,4	3,5	GX 24-3	32,83	**686**
GX 24-4 E6.00 N 0.50	24	6	0,5	4,0	GX 24-4	34,04	**688**

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 88
→ Application recommendation on page 89

Internal machining

→ 63

→ 67+68

External machining

→ 60–63

→ 64

→ 65+66

→ 69

→ 70

Radius grooving insert GX 24

▲ Insert with highly positive cutting edge geometry and sharp cutting edge
▲ ground periphery



F	M	R



-27PF
H216T

70 353 ...

Designation	INSL mm	CW +/-0,02 mm	CRE mm	PDPT mm	for tool holder	EUR 1C/72	
GX 24-4 R3.00 N	25,4	6	3	4	GX 24-4	42,83	**500**
GX 24-5 R4.00 N	25,4	8	4	5	GX 24-5	45,20	**506**

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 88
→ Application recommendation on page 90

Internal machining

→ 63 | → 67+68

External machining

→ 60–63 | → 64 | → 65+66 | → 69 | → 70

11

ModularClamp MSS – Radial grooving module GX 24

▲ For deep radial parting and grooving
▲ For turning

Scope of supply:
Grooving module only





Illustrations show right-hand versions

ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand 70 868 ... EUR 2C/71		Right-hand 70 867 ... EUR 2C/71	
E20 R/L 21-GX 24-1	2,00 - 2,75	3,60	22	20	24	60	21	GX 24-1	108,60	**020**	108,60	**020**
E20 R/L 21-GX 24-2	3	3,40	22	20	24	60	21	GX 24-2	108,60	**120**	108,60	**120**
E20 R/L 21-GX 24-3	4/5	2,93	22	20	24	30	21	GX 24-3	108,60	**22000**	108,60	**22000**
E25 R/L 21-GX 24-1	2,00 - 2,75	5,10	22	25	30	75	21	GX 24-1	109,40	**025**	109,40	**025**
E25 R/L 21-GX 24-2	3	4,90	22	25	30	75	21	GX 24-2	109,40	**125**	109,40	**125**
E25 R/L 21-GX 24-3	4/5	4,43	22	25	30	75	21	GX 24-3	109,40	**225**	109,40	**225**
E25 R/L 21-GX 24-4	6	3,80	22	25	30	75	21	GX 24-4	109,40	**325**	109,40	**325**
E25 R/L 21-GX 24-5	8	2,95	23	25	30	75	21	GX 24-5	109,40	**425**	109,40	**425**



→ 52–59 → 80+81 → 82

ModularClamp MSS – Axial grooving module GX 24 short

▲ For axial grooving
▲ For face turning

Scope of supply:
Grooving module only

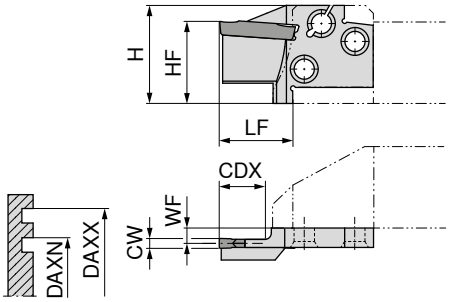



Illustrations show right-hand versions

ISO designation	DAXN mm	DAXX mm	CW mm	WF mm	LF mm	HF mm	H mm	CDX mm	for grooving inserts	Left-hand 70 891 ... EUR 2C/71		Right-hand 70 890 ... EUR 2C/71	
E20 R/L 14-GX 24-2 A	50	70	3	3,40	22	20	24	14	GX 24-2	141,10	**100**	141,10	**100**
E20 R/L 14-GX 24-2 A	70	100	3	3,40	22	20	24	14	GX 24-2	141,10	**102**	141,10	**102**
E20 R/L 14-GX 24-2 A	100	150	3	3,40	22	20	24	14	GX 24-2	141,10	**104**	141,10	**104**
E25 R/L 15-GX 24-2 A	50	70	3	4,90	22	25	30	15	GX 24-2	142,30	**200**	142,30	**200**
E25 R/L 15-GX 24-2 A	70	100	3	4,90	22	25	30	15	GX 24-2	142,30	**202**	142,30	**202**
E25 R/L 15-GX 24-2 A	100	150	3	4,90	22	25	30	15	GX 24-2	142,30	**204**	142,30	**204**
E25 R/L 15-GX 24-3 A	50	70	4/5	4,43	22	25	30	15	GX 24-3	142,30	**206**	142,30	**206**
E25 R/L 15-GX 24-3 A	70	100	4/5	4,43	22	25	30	15	GX 24-3	142,30	**208**	142,30	**208**
E25 R/L 15-GX 24-3 A	100	150	4/5	4,43	22	25	30	15	GX 24-3	142,30	**210**	142,30	**210**
E25 R/L 15-GX 24-3 A	150	300	4/5	4,43	22	25	30	15	GX 24-3	142,30	**212**	142,30	**212**
E25 R/L 15-GX 24-4 A	50	70	6	3,80	22	25	30	15	GX 24-4	142,30	**214**	142,30	**214**
E25 R/L 15-GX 24-4 A	70	100	6	3,80	22	25	30	15	GX 24-4	142,30	**216**	142,30	**216**
E25 R/L 15-GX 24-4 A	100	150	6	3,80	22	25	30	15	GX 24-4	142,30	**218**	142,30	**218**
E25 R/L 15-GX 24-4 A	150	300	6	3,80	22	25	30	15	GX 24-4	142,30	**220**	142,30	**220**



→ 52–59 → 80+81 → 82

ModularClamp MSS – Axial grooving module GX 24 long

▲ For axial grooving
▲ For face turning

Scope of supply:
Grooving module only

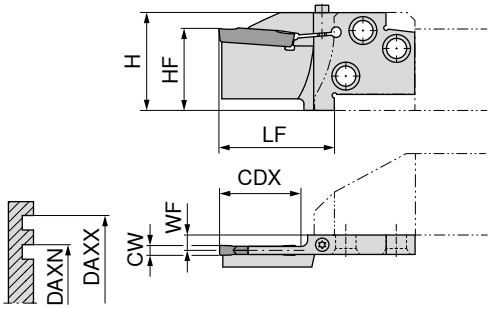

Illustrations show right-hand versions

ISO designation	DAXN mm	DAXX mm	CW mm	WF mm	LF mm	HF mm	H mm	CDX mm	for grooving inserts	Left-hand 70 895 ... EUR 2C/71		Right-hand 70 894 ... EUR 2C/71	
E25 R/L 21-GX 24-3 AS	50	70	4/5	4,53	35	25	30	21	GX 24-3	145,10	**200**	145,10	**200**
E25 R/L 21-GX 24-3 AS	70	100	4/5	4,53	35	25	30	21	GX 24-3	145,10	**202**	145,10	**202**
E25 R/L 21-GX 24-3 AS	100	150	4/5	4,53	35	25	30	21	GX 24-3	145,10	**204**	145,10	**204**
E25 R/L 21-GX 24-3 AS	150	300	4/5	4,53	35	25	30	21	GX 24-3	145,10	**206**	145,10	**206**
E25 R/L 25-GX 24-4 AS	50	70	6	3,90	35	25	30	25	GX 24-4	145,10	**210**	145,10	**210**
E25 R/L 25-GX 24-4 AS	70	100	6	3,90	35	25	30	25	GX 24-4	145,10	**212**	145,10	**212**
E25 R/L 25-GX 24-4 AS	100	150	6	3,90	35	25	30	25	GX 24-4	145,10	**214**	145,10	**214**
E25 R/L 25-GX 24-4 AS	150	300	6	3,90	35	25	30	25	GX 24-4	145,10	**216**	145,10	**216**

Axial modules version „GX 24 long“ can be clamped on both sides.

Key D

Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
GX 24-3	T15	11,96	**113**	M3,5x14	5,27	**160**
GX 24-4	T15	11,96	**113**	M3,5x14	5,27	**160**

→ 52–59


→ 80+81

→ 82

ModularClamp MSS – Radial Grooving module GX 24 for Internal machining

▲ for grooving and turning

Scope of supply:
Grooving module only



Neutral

70 880 ...

ISO designation	CW mm	LB mm	WF mm	H mm	CDX mm	DMIN mm	for grooving inserts	EUR 2C/71	
I40 N 19-GX 24-2	2,76 - 3,75	6,2	33,5	40,7	19	60	GX 24-2 ..N	126,50	**340**
I40 N 19-GX 24-3	3,76 - 5,00	6,2	33,5	40,7	19	60	GX 24-3 ..N	126,50	**440**
I40 N 19-GX 24-4	5,01 - 6,50	6,2	33,5	40,7	19	60	GX 24-4 ..N	126,50	**540**

→ 52–59 → 83

MonoClamp – Radial Blade GX 24

Scope of supply:
Blade incl. key and clamping screw

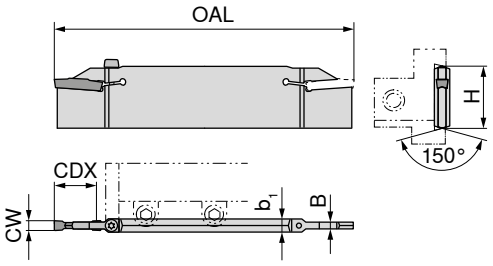

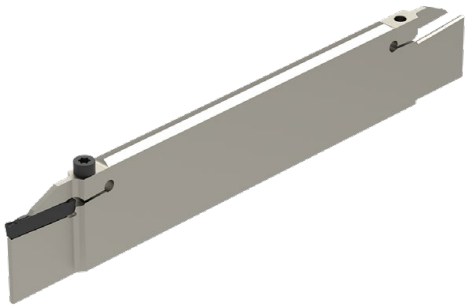

ISO designation	CW mm	H mm	B mm	b_1 mm	OAL mm	CDX mm	for grooving inserts	70 834 ... EUR 2A/25	
XLCF N 3203-GX24-1S	2	32	1,05	6,2	180	21	GX 24-1	106,00	**102**
XLCF N 3203-GX24-2S	3	32	2,10	6,2	180	21	GX 24-2	107,60	**103**
XLCF N 3204-GX24-3S	4/5	32	3,05	6,2	180	21	GX 24-3	114,70	**104**
XLCF N 3206-GX24-4S	6	32	4,20	6,2	180	21	GX 24-4	135,60	**106**

Key D

Clamping screw

Spare parts for grooving inserts	80 950 ...			70 950 ...		
		EUR Y7			EUR 2A/28	
GX 24-1	T15	11,96	**113**	M3,5x14	5,27	**160**
GX 24-2	T15	11,96	**113**	M3,5x14	5,27	**160**
GX 24-3	T15	11,96	**113**	M3,5x14	5,27	**160**
GX 24-4	T15	11,96	**113**	M3,5x14	5,27	**160**

→ 52–59

→ 85+86

→ **Chapter 16**

MonoClamp – Radial Monoholder GX-DC 24

Scope of supply:
Mono holder incl. key and clamping screw

Direct Cooling

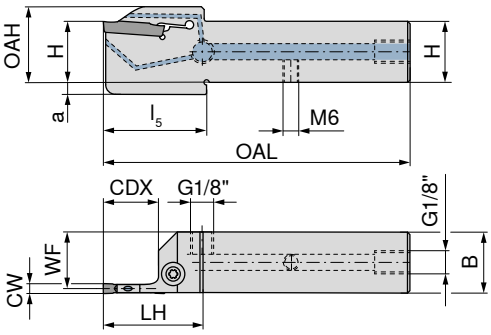

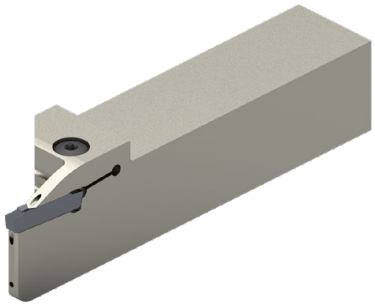

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	CDX mm	a mm	for grooving inserts	Left-hand 70 844 ... EUR 2C/71		Right-hand 70 844 ... EUR 2C/71	
E16 R/L 0021S2-1616X-S-DC-GX24	16	16	2	15,2	22	94	39	40	21	4	GX 24-1 E2..	200,40	**21601**	200,40	**21600**
E16 R/L 0021S3-1616X-S-DC-GX24	16	16	3	14,8	22	94	39	40	21	4	GX 24-2 E3..	200,40	**31601**	200,40	**31600**
E20 R/L 0021S2-2020X-S-DC-GX24	20	20	2	19,2	26	109	40		21		GX 24-1 E2..	230,70	**22001**	230,70	**22000**
E20 R/L 0021S3-2020X-S-DC-GX24	20	20	3	18,8	26	109	40		21		GX 24-2 E3..	230,70	**32001**	230,70	**32000**
E20 R/L 0021S4-2020X-S-DC-GX24	20	20	4	18,3	26	109	40		21		GX 24-3 E4..	230,70	**42001**	230,70	**42000**
E20 R/L 0021S5-2020X-S-DC-GX24	20	20	5	18,0	26	109	40		21		GX 24-3 E5..	230,70	**52001**	230,70	**52000**
E25 R/L 0021S3-2525X-S-DC-GX24	25	25	3	23,8	31	124	40		21		GX 24-2 E3..	246,70	**32501**	246,70	**32500**
E25 R/L 0021S4-2525X-S-DC-GX24	25	25	4	23,3	31	124	40		21		GX 24-3 E4..	246,70	**42501**	246,70	**42500**
E25 R/L 0021S5-2525X-S-DC-GX24	25	25	5	23,0	31	124	40		21		GX 24-3 E5..	246,70	**52501**	246,70	**52500**
E25 R/L 0021S6-2525X-S-DC-GX24	25	25	6	22,5	31	124	40		21		GX 24-4 E6..	246,70	**62501**	246,70	**62500**

Key D

Clamping screw

Spare parts for grooving inserts	80 950 ...		70 950 ...	
	EUR Y7		EUR 2A/28	
GX 24-1 E2..	T15 - IP 15,33	**128**	M5x18 - 15IP 12,31	**865**
GX 24-2 E3..	T15 - IP 15,33	**128**	M5x18 - 15IP 12,31	**865**
GX 24-3 E4..	T15 - IP 15,33	**128**	M5x18 - 15IP 12,31	**865**
GX 24-3 E5..	T15 - IP 15,33	**128**	M5x18 - 15IP 12,31	**865**
GX 24-4 E6..	T15 - IP 15,33	**128**	M5x18 - 15IP 12,31	**865**

→ 52–59 → **Chapter 16**

MonoClamp – Radial Monoholder GX 24

Scope of supply:
Mono holder incl. key and clamping screw

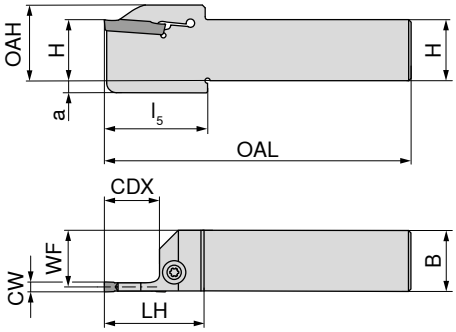

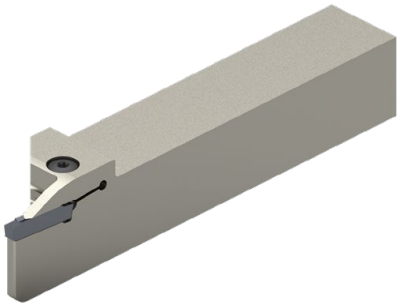

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	CDX mm	a mm	for grooving inserts	Left-hand 70 845 ... EUR 2C/71		Right-hand 70 845 ... EUR 2C/71	
E16 R/L 0021S2-1616K-S-GX24	16	16	2	15,2	22	125	39	40	21	4	GX 24-1 E2..	132,20	**21601**	132,20	**21600**
E16 R/L 0021S3-1616K-S-GX24	16	16	3	14,8	22	125	39	40	21	4	GX 24-2 E3..	132,20	**31601**	132,20	**31600**
E20 R/L 0021S2-2020K-S-GX24	20	20	2	19,2	26	125	40		21		GX 24-1 E2..	152,30	**22001**	152,30	**22000**
E20 R/L 0021S3-2020K-S-GX24	20	20	3	18,8	26	125	40		21		GX 24-2 E3..	152,30	**32001**	152,30	**32000**
E20 R/L 0021S4-2020K-S-GX24	20	20	4	18,3	26	125	40		21		GX 24-3 E4..	152,30	**42001**	152,30	**42000**
E20 R/L 0021S5-2020K-S-GX24	20	20	5	18,0	26	125	40		21		GX 24-3 E5..	152,30	**52001**	152,30	**52000**
E25 R/L 0021S3-2525M-S-GX24	25	25	3	23,8	31	150	40		21		GX 24-2 E3..	162,80	**32501**	162,80	**32500**
E25 R/L 0021S4-2525M-S-GX24	25	25	4	23,3	31	150	40		21		GX 24-3 E4..	162,80	**42501**	162,80	**42500**
E25 R/L 0021S5-2525M-S-GX24	25	25	5	23,0	31	150	40		21		GX 24-3 E5..	162,80	**52501**	162,80	**52500**
E25 R/L 0021S6-2525M-S-GX24	25	25	6	22,5	31	150	40		21		GX 24-4 E6..	162,80	**62501**	162,80	**62500**

Key D

Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
GX 24-1 E2..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 24-2 E3..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 24-3 E4..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 24-3 E5..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**
GX 24-4 E6..	T15 - IP	15,33	**128**	M5x18 - 15IP	12,31 **865**

→ 52–59 → **Chapter 16**

MonoClamp – Radial Mono-boring bars GX 24

Scope of supply:
Boring bar incl. key and clamping screw

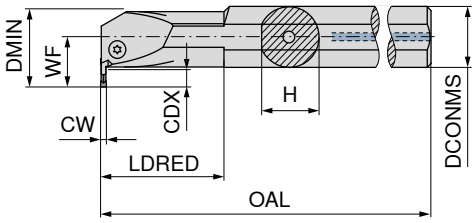

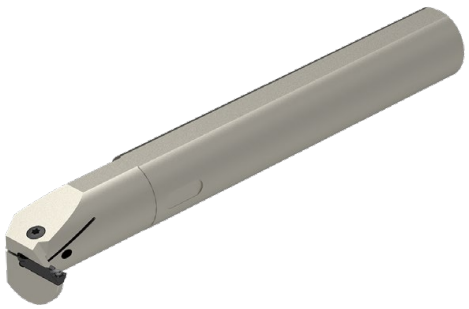

Illustrations show right-hand versions

										Left-hand		Right-hand	
										70 895 ...		**70 894 ...**	
ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	**EUR** 2C/71		**EUR** 2C/71	
I32 R/L 90-2.0D-GX24-2	31,0	32	42	2,76 - 3,75	11	27,5	250	64	GX 24-2	246,10	**132**	246,10	**132**
I32 R/L 90-2.0D-GX24-3	31,0	32	42	3,76 - 5,00	11	27,5	250	64	GX 24-3	246,10	**232**	246,10	**232**
I40 R/L 90-2.0D-GX24-3	38,5	40	53	3,76 - 5,00	12	32,5	300	80	GX 24-3	305,90	**240**	305,90	**240**

Key D

Clamping screw

		80 950 ...			**70 950 ...**	
Spare parts for grooving inserts		**EUR** Y7			**EUR** 2A/28	
GX 24-2	T20	12,83	**114**	M5x18	7,37	**404**
GX 24-3	T20	12,83	**114**	M5x18	7,37	**404**

→ 52–59 → **Chapter 16**

11

MonoClamp – Radial Mono-boring bars GX 24

Scope of supply:
Boring bar incl. key and clamping screw

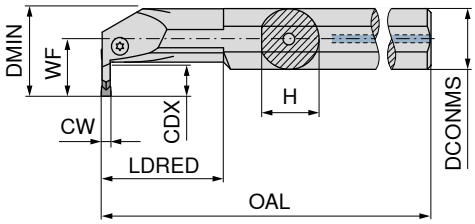

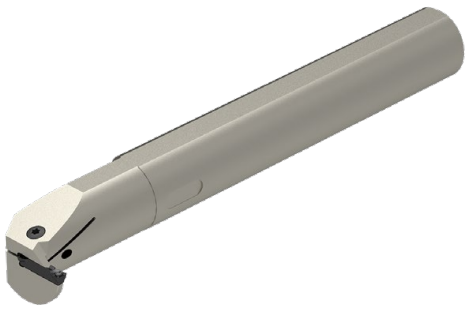

Illustrations show right-hand versions

										Left-hand		Right-hand	
										70 895 ...		**70 894 ...**	
ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	**EUR** 2C/71		**EUR** 2C/71	
I32 R/L 90-2.0D-GX24-4	31,0	32	47	5,01 - 6,50	17,5	30,4	250	64	GX 24-4	246,10	**332**	246,10	**332**
I40 R/L 90-2.0D-GX24-4	38,5	40	57	5,01 - 6,50	17,5	34,4	300	80	GX 24-4	305,90	**340**	305,90	**340**

Key D

Clamping screw

				80 950 ...		**70 950 ...**	
Spare parts **for grooving inserts**				**EUR** Y7		**EUR** 2A/28	
GX 24-4		T20		12,83	**114**	M5x18	7,37 **404**

→ 52–59 → **Chapter 16**

MonoClamp – Axial Monoholder GX 24

Scope of supply:
Mono holder incl. key and clamping screw

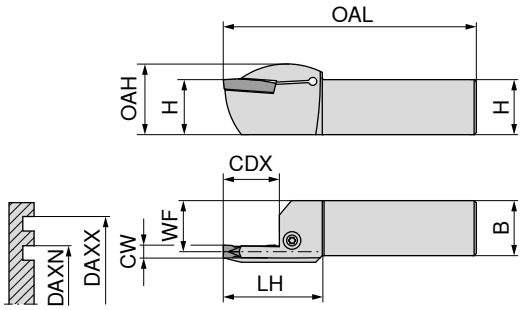

Illustrations show right-hand versions

ISO designation	H	B	CW	WF	DAXN	DAXX	OAH	OAL	LH	CDX	for grooving inserts	Left-hand 70 904 ... EUR 2C/71		Right-hand 70 903 ... EUR 2C/71	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
E25 R/L 0012-2525X-GX24-2	25	25	3	24,7	45	50	32	115	45	12	GX 24-2	165,80	**202**	165,80	**202**
E25 R/L 0016-2525X-GX24-2	25	25	3	24,7	50	60	32	115	45	16	GX 24-2	165,80	**204**	165,80	**204**
E25 R/L 0019-2525X-GX24-2	25	25	3	24,7	60	75	32	115	45	19	GX 24-2	165,80	**206**	165,80	**206**
E25 R/L 0019-2525X-GX24-2	25	25	3	24,7	75	100	32	115	45	19	GX 24-2	165,80	**208**	165,80	**208**
E25 R/L 0022-2525X-GX24-2	25	25	3	24,7	100	130	32	115	45	22	GX 24-2	165,80	**210**	165,80	**210**
E25 R/L 0022-2525X-GX24-2	25	25	3	24,7	130	180	32	115	45	22	GX 24-2	165,80	**212**	165,80	**212**
E25 R/L 0022-2525X-GX24-2	25	25	3	24,7	180	300	32	115	45	22	GX 24-2	165,80	**214**	165,80	**214**
E25 R/L 0012-2525X-GX24-3	25	25	4+5	24,2	45	50	32	115	45	12	GX 24-3	165,80	**232**	165,80	**232**
E25 R/L 0020-2525X-GX24-3	25	25	4+5	24,2	50	60	32	115	45	20	GX 24-3	165,80	**234**	165,80	**234**
E25 R/L 0020-2525X-GX24-3	25	25	4+5	24,2	60	75	32	115	45	20	GX 24-3	165,80	**236**	165,80	**236**
E25 R/L 0022-2525X-GX24-3	25	25	4+5	24,2	75	100	32	115	45	22	GX 24-3	165,80	**238**	165,80	**238**
E25 R/L 0022-2525X-GX24-3	25	25	4+5	24,2	100	150	32	115	45	22	GX 24-3	165,80	**240**	165,80	**240**
E25 R/L 0022-2525X-GX24-3	25	25	4+5	24,2	150	300	32	115	45	22	GX 24-3	165,80	**242**	165,80	**242**
E25 R/L 0022-2525X-GX24-4	25	25	6	23,2	50	70	32	115	45	22	GX 24-4	165,80	**262**	165,80	**262**
E25 R/L 0025-2525X-GX24-4	25	25	6	23,2	70	100	32	115	45	25	GX 24-4	165,80	**264**	165,80	**264**
E25 R/L 0025-2525X-GX24-4	25	25	6	23,2	100	150	32	115	45	25	GX 24-4	165,80	**266**	165,80	**266**
E25 R/L 0025-2525X-GX24-4	25	25	6	23,2	150	300	32	115	45	25	GX 24-4	165,80	**268**	165,80	**268**

Key D

Clamping screw

Spare parts for grooving inserts	80 950 ... EUR Y7		70 950 ... EUR 2A/28	
GX 24-2	T15 - IP	15,33 **128**	M5x18 - 15IP	12,31 **865**
GX 24-3	T15 - IP	15,33 **128**	M5x18 - 15IP	12,31 **865**
GX 24-4	T15 - IP	15,33 **128**	M5x18 - 15IP	12,31 **865**

→ 52–59 → **Chapter 16**

11

MaxiChange-GX – GX-DC 24 axial exchangeable grooving head

▲ For axial grooving

Scope of supply:
Exchangeable grooving head with clamping claw and clamping screw

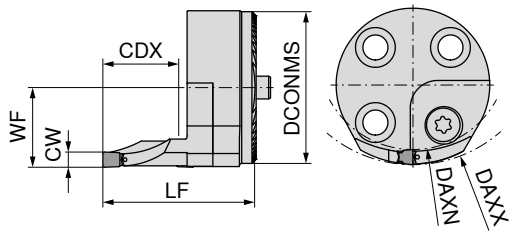



Illustrations show right-hand versions

ISO designation	DCONMS mm	DAXN mm	DAXX mm	CW mm	WF mm	LF mm	CDX mm	for grooving inserts	NEW Left-hand 84 186 ... EUR Y8		NEW Right-hand 84 187 ... EUR Y8	
WK40 R/L 20-DC GX 24-S3 D50-70	40	50	70	3	21	40	20	GX 24-2 ..N	224,90	**34000**	224,90	**34000**
WK40 R/L 20-DC GX 24-S3 D70-100	40	70	100	3	21	40	20	GX 24-2 ..N	224,90	**34100**	224,90	**34100**
WK40 R/L 20-DC GX 24-S3 D100-150	40	100	150	3	21	40	20	GX 24-2 ..N	224,90	**34200**	224,90	**34200**
WK40 R/L 20-DC GX 24-S3 D150-300	40	150	300	3	21	40	20	GX 24-2 ..N	224,90	**34300**	224,90	**34300**
WK40 R/L 20-DC GX 24-S4 D50-70	40	50	70	4	21	40	20	GX 24-3 ..N	239,40	**44000**	239,40	**44000**
WK40 R/L 20-DC GX 24-S4 D70-100	40	70	100	4	21	40	20	GX 24-3 ..N	239,40	**44100**	239,40	**44100**
WK40 R/L 20-DC GX 24-S4 D100-150	40	100	150	4	21	40	20	GX 24-3 ..N	239,40	**44200**	239,40	**44200**
WK40 R/L 20-DC GX 24-S4 D150-300	40	150	300	4	21	40	20	GX 24-3 ..N	239,40	**44300**	239,40	**44300**

Spare parts for Article no.	Clamping claw 84 950 ... EUR Y8			O-Ring 84 950 ... EUR Y8		Clamping screw 84 950 ... EUR Y8		Guide pin 84 950 ... EUR Y8	
84 187 34000	44,42	**51400**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 34000	44,42	**51800**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 34100	45,09	**51500**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 34100	45,09	**51900**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 34200	46,33	**51600**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 34200	46,33	**52000**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 34300	48,90	**51700**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 34300	48,90	**52100**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 44000	44,42	**52200**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 44000	44,42	**52600**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 44100	45,09	**52300**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 44100	45,09	**52700**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 44200	46,33	**52400**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 44200	46,33	**52800**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 187 44300	48,90	**52500**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**
84 186 44300	48,90	**52900**	2x1	3,14	**50300**	M6x0,5X5/T25	7,01 **50200**	D4H6X12	3,70 **53200**



→ 52–59 → **Chapter 9**

TX grooving insert for grooving and parting off

▲ Cutting depth 5.0 mm
▲ Cutting width 1.99–2.79 mm



F	M	R



Illustrations show right-hand versions

CWX500

CWX500



ISO designation	CW -0,05 mm	RE mm	PSIR	for tool holder	Left-hand 73 302 ... EUR Y6		Right-hand 73 301 ... EUR Y6	
TX R/L 0518.00.1	1,99	0,1	5°	R/L 207 .. . / 780 .. . 1	32,25	**204**	32,25	**204**
TX R/L 0521.00.2	2,29	0,1	5°	R/L 207 .. . / 780 .. . 2	32,25	**206**	32,25	**206**
TX R/L 0526.00.2	2,79	0,1	5°	R/L 207 .. . / 780 .. . 2	32,82	**208**	32,82	**208**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	●	●

→ v_c Page 88

Grooving depth

Full material



max. 10 mm

Pipe



D ≤ 50 mm: Wall thickness B = approx. 5 mm
D ≥ 50 mm: Wall thickness B = approx. 4 mm

Internal machining

→ 79

External machining

→ 76–78

TX insert for circlip grooves

▲ For circlip grooves according to DIN 471 / 472

CWX500

F	M	R

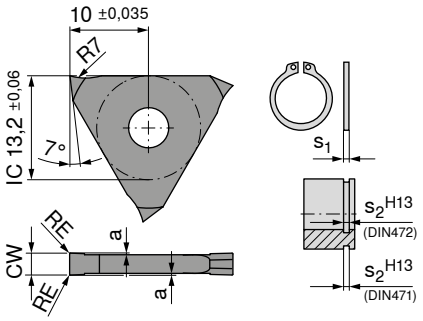

Neutral

73 300 ...

Designation	s_2 mm	CW $_{-0,05}$ mm	RE mm	a $_{+/-0,02}$ mm	for tool holder	EUR Y6	
TX N 0050.00.1	0,50	0,57	0,05	0,07	R/L .. .1	22,02	**204**
TX N 0060.00.1	0,60	0,67	0,05	0,07	R/L .. .1	22,02	**206**
TX N 0070.00.1	0,70	0,77	0,05	0,08	R/L .. .1	22,02	**208**
TX N 0080.00.1	0,80	0,87	0,05	0,08	R/L .. .1	22,02	**210**
TX N 0090.00.1	0,90	0,97	0,05	0,08	R/L .. .1	22,02	**212**
TX N 0100.00.1	1,00	1,07	0,10	0,09	R/L .. .1	22,02	**214**
TX N 0110.00.1	1,10	1,24	0,10	0,15	R/L .. .1	22,02	**216**
TX N 0130.00.1	1,30	1,44	0,10	0,15	R/L .. .1	22,02	**218**
TX N 0160.00.1	1,60	1,74	0,10	0,20	R/L .. .1	22,02	**220**
TX N 0185.00.1	1,85	1,99	0,10	0,20	R/L .. .1	22,02	**222**
TX N 0215.00.2	2,15	2,29	0,10	0,20	R/L .. .2	22,02	**224**
TX N 0265.00.2	2,65	2,79	0,10	0,20	R/L .. .2	22,02	**226**
TX N 0315.00.3	3,15	3,29	0,10	0,20	R/L .. .3	23,16	**228**
TX N 0415.00.4	4,15	4,29	0,10	0,20	R/L .. .4	23,29	**230**
TX N 0515.00.4	5,15	5,29	0,10	0,20	R/L .. .4	23,99	**232**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c Page 88

Internal machining

→ 79

External machining

→ 76–78

Radial TX insert for corner recessing

▲ Full radius for cutting width 0.5–5.0 mm

CWX500

F	M	R





Neutral

73 304 ...

Designation	CRE mm	CW +/-0,05 mm	PDPT mm	for tool holder	EUR Y6	
TX N 0002.05.1	0,25	0,5	0,20	R/L .. .1	30,42	**212**
TX N 0005.10.1	0,50	1,0	0,35	R/L .. .1	30,42	**214**
TX N 0006.12.1	0,60	1,2	0,40	R/L .. .1	30,42	**216**
TX N 0008.16.1	0,80	1,6	0,55	R/L .. .1	30,42	**218**
TX N 0010.20.2	1,00	2,0	0,70	R/L .. .2	33,66	**204**
TX N 0012.25.2	1,25	2,5	0,85	R/L .. .2	35,25	**220**
TX N 0015.30.3	1,50	3,0	1,00	R/L .. .3	35,96	**206**
TX N 0020.40.4	2,00	4,0	1,20	R/L .. .4	35,67	**208**
TX N 0025.50.4	2,50	5,0	1,50	R/L .. .4	36,23	**210**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c Page 88

11

Internal machining

→ 79

External machining

→ 76–78

TX insert for fine and copy turning



F	M	R



CWX500



Neutral

Designation	CW +0,03 mm	RE mm	for tool holder	73 303 ... EUR Y6	
TX N 0150.02.1	1,5	0,2	R/L 207 .. . / 738 .. . / 660 .. . 1	27,27	**204**
TX N 0200.02.1	2,0	0,2	R/L 207 .. . / 738 .. . / 660 .. . 1	27,27	**206**
TX N 0200.04.1	2,0	0,4	R/L 207 .. . / 738 .. . / 660 .. . 1	27,27	**208**
TX N 0300.02.2	3,0	0,2	R/L 207 .. . / 738 .. . / 660 .. . 2	28,69	**210**
TX N 0300.06.2	3,0	0,6	R/L 207 .. . / 738 .. . / 660 .. . 2	28,69	**212**
TX N 0300.08.2	3,0	0,8	R/L 207 .. . / 738 .. . / 660 .. . 2	28,69	**214**
TX N 0400.02.3	4,0	0,2	R/L 207 .. . / 738 .. . / 660 .. . 3	28,98	**216**
TX N 0400.08.3	4,0	0,8	R/L 207 .. . / 738 .. . / 660 .. . 3	28,98	**218**
TX N 0400.12.3	4,0	1,2	R/L 207 .. . / 738 .. . / 660 .. . 3	28,98	**220**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c Page 88

Internal machining

→ 79

External machining

→ 76–78

TX insert for axial grooving

▲ Up to cutting depth 3.5 mm
▲ Cutting width 1.5–5.0 mm
▲ Groove-Ø external D_a ≥ 20 mm

F	M	R

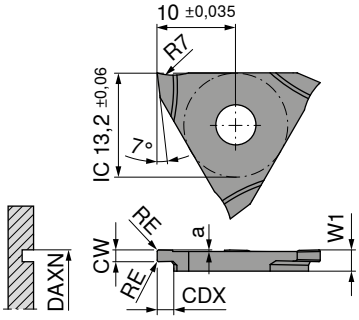

CWX500



CWX500

Illustrations show right-hand versions

ISO designation	CW mm	W1 mm	CDX mm	a mm	DAXN mm	RE mm	for tool holder	Left-hand 73 306 ... EUR Y6		Right-hand 73 305 ... EUR Y6	
TX R/L 2015.2.2	1,5	2,7	2	0,2	20	0,2	R/L 207 .. . 2	32,11	**204**	32,11	**204**
TX R/L 3020.2.2	2,0	2,7	3	0,2	30	0,2	R/L 207 .. . 2	32,11	**206**	32,11	**206**
TX R/L 3030.2.3	3,0	3,7	3	0,2	30	0,2	R/L 207 .. . 3	32,38	**208**	32,38	**208**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	●	●

→ v_c Page 88

11

Internal machining	*External machining*
	→ 76+77

MonoClamp – Radial/Axial TX Grooving Holder 0° 6 mm cutting depth

▲ For radial and axial grooving
▲ Cutting width 0.5–6.3 mm

Scope of supply:
Grooving holder only

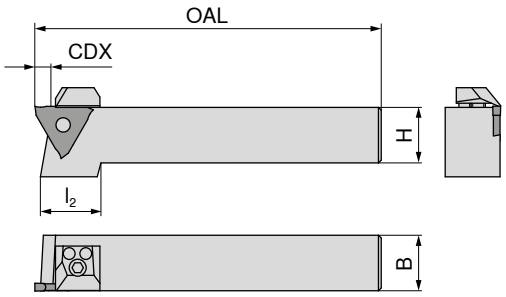

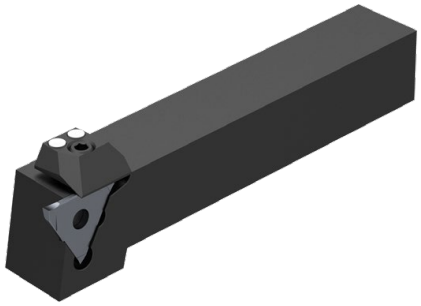

Illustrations show right-hand versions

ISO designation	H mm	B +/-0,1 mm	OAL mm	l_2 mm	CDX mm	for grooving inserts	Left-hand 73 501 ... EUR Y6		Right-hand 73 500 ... EUR Y6	
R/L 207.1212.1	12	12	100	24	4	TX R/N/L ...1	132,50	**112**	132,50	**112**
R/L 207.1616.1	16	16	125	22	4	TX R/N/L ...1	118,20	**116**	118,20	**116**
R/L 207.2020.1	20	20	125	21	4	TX R/N/L ...1	91,62	**120**	91,62	**120**
R/L 207.2525.1	25	25	150		4	TX R/N/L ...1	96,14	**125**	96,14	**125**
R/L 207.1212.2	12	12	100	24	6	TX R/N/L ...2	132,50	**212**	132,50	**212**
R/L 207.1616.2	16	16	125	22	6	TX R/N/L ...2	118,20	**216**	118,20	**216**
R/L 207.2020.2	20	20	125	21	6	TX R/N/L ...2	91,62	**220**	91,62	**220**
R/L 207.2525.2	25	25	150		6	TX R/N/L ...2	96,14	**225**	96,14	**225**
R/L 207.1212.3	12	12	100	24	6	TX R/N/L ...3	132,50	**312**	132,50	**312**
R/L 207.1616.3	16	16	125	22	6	TX R/N/L ...3	118,20	**316**	118,20	**316**
R/L 207.2020.3	20	20	125	21	6	TX R/N/L ...3	91,62	**320**	91,62	**320**
R/L 207.2525.3	25	25	150		6	TX R/N/L ...3	96,14	**325**	96,14	**325**
R 207.3232.3	32	32	170		6	TX R/N/L ...3			112,20	**332**
R/L 207.1616.4	16	16	125	22	6	TX R/N/L ...4	118,20	**416**	118,20	**416**
R/L 207.2020.4	20	20	125	21	6	TX R/N/L ...4	91,62	**420**	91,62	**420**
R/L 207.2525.4	25	25	150		6	TX R/N/L ...4	96,14	**425**	96,14	**425**


right hand


left hand

Key I

Clamping screw

Guide pin

Spare parts for grooving inserts	right hand 73 950 ... EUR Y6		left hand 73 950 ... EUR Y6		Key I 70 950 ... EUR 2A/28		Clamping screw 73 950 ... EUR Y6		Guide pin 73 950 ... EUR Y6	
TX R/N/L ...1	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...1			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...2			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...2	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...3			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...3	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...4	29,45	**022**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...4			29,45	**026**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**

→ 71–75 → **Chapter 16**

MonoClamp – Radial TX Grooving holder 0° 8 mm cutting depth

▲ For radial parting and grooving
▲ Cutting width 1.9–6.3 mm

Scope of supply:
Grooving holder only

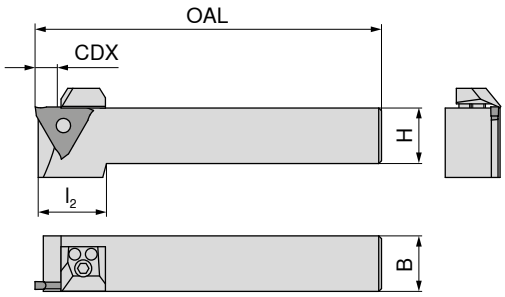

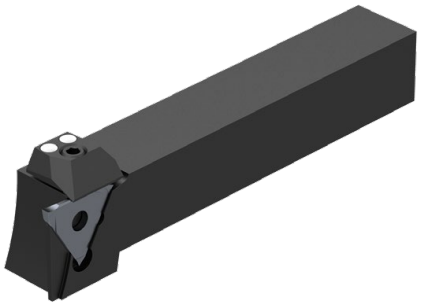

Illustrations show right-hand versions

ISO designation	H mm	B +/-0,1 mm	OAL mm	l_2 mm	CDX mm	for grooving inserts	Left-hand 73 503 ... EUR Y6		Right-hand 73 502 ... EUR Y6	
R/L 780.2020.2	20	20	125	24	8	TX R/N/L ...2	97,98	**120**	97,98	**120**
R/L 780.2525.2	25	25	150		8	TX R/N/L ...2	102,90	**125**	102,90	**125**
R/L 780.2020.3	20	20	125	24	8	TX R/N/L ...3	97,98	**220**	97,98	**220**
R/L 780.2525.3	25	25	150		8	TX R/N/L ...3	102,90	**225**	102,90	**225**
R/L 780.2020.4	20	20	125	24	8	TX R/N/L ...4	97,98	**320**	97,98	**320**
R/L 780.2525.4	25	25	150		8	TX R/N/L ...4	102,90	**325**	102,90	**325**

Spare parts for grooving inserts	 right hand 73 950 ... EUR Y6		 left hand 73 950 ... EUR Y6		Key I 70 950 ... EUR 2A/28		Clamping screw 73 950 ... EUR Y6		Guide pin 73 950 ... EUR Y6	
TX R/N/L ...2	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...2			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...3	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...3			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...4	29,45	**022**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...4			29,45	**026**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**

→ 71–75 → **Chapter 16**

11

MonoClamp – Radial TX Grooving holder 90° 6 mm cutting depth

▲ For radial grooving
▲ Cutting width 0.5–6.3 mm

Scope of supply:
Grooving holder only

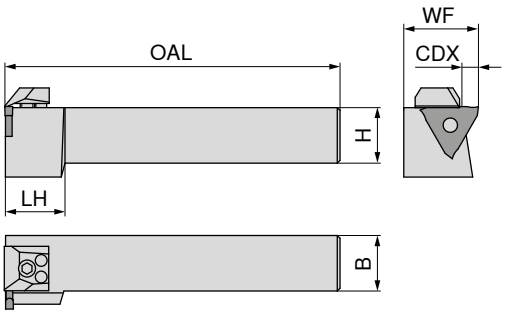

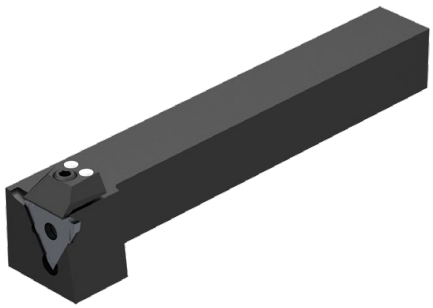

Illustrations show right-hand versions

ISO designation	H mm	B +/-0,1 mm	OAL mm	LH mm	WF +/-0,07 mm	CDX mm	for grooving inserts	Left-hand 73 505 ... EUR Y6		Right-hand 73 504 ... EUR Y6	
R/L 738.2020.1	20	20	150	20	27	4	TX R/N/L ...1	114,20	**120**	114,20	**120**
R/L 738.2525.1	25	25	150		32	4	TX R/N/L ...1	118,20	**125**	118,20	**125**
R/L 738.2020.2	20	20	150	20	27	6	TX R/N/L ...2	114,20	**220**	114,20	**220**
R/L 738.2525.2	25	25	150		32	6	TX R/N/L ...2	118,20	**225**	118,20	**225**
R/L 738.2020.3	20	20	150	20	27	6	TX R/N/L ...3	114,20	**320**	114,20	**320**
R/L 738.2525.3	25	25	150		32	6	TX R/N/L ...3	118,20	**325**	118,20	**325**
R/L 738.2020.4	20	20	150	20	27	6	TX R/N/L ...4	114,20	**420**	114,20	**420**
R/L 738.2525.4	25	25	150		32	6	TX R/N/L ...4	118,20	**425**	118,20	**425**


right hand


left hand

Key I

Clamping screw

Guide pin

Spare parts for grooving inserts	right hand 73 950 ... EUR Y6		left hand 73 950 ... EUR Y6		Key I 70 950 ... EUR 2A/28		Clamping screw 73 950 ... EUR Y6		Guide pin 73 950 ... EUR Y6	
TX R/N/L ...1	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...1			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...2			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...2	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...3			26,53	**024**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...3	26,53	**020**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...4	29,45	**022**			SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**
TX R/N/L ...4			29,45	**026**	SW3	3,15 **176**	M6x20	5,44 **028**	Ø 4x18	0,48 **030**

→ 71–75 → **Chapter 16**

MonoClamp – Radial Boring bar TX

▲ For radial internal grooving
▲ Cutting width 0.5–6.3 mm

Scope of supply:
Boring bar only

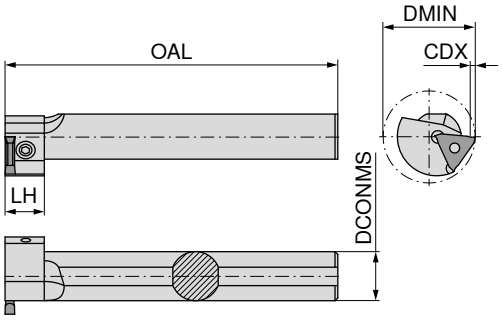

Illustrations show right-hand versions

ISO designation	DCONMS $_{g7}$ mm	DMIN mm	OAL mm	LH mm	CDX mm	for grooving inserts	Left-hand 73 511 ... EUR Y6		Right-hand 73 510 ... EUR Y6	
R/L 660.0025.1	25	46	170	20	2	TX R/N/L ...1	156,40	**125**	156,40	**125**
R/L 660.0032.1	32	46	200	20	2	TX R/N/L ...1	192,40	**132**	192,40	**132**
R/L 660.0040.1	40	46	250		2	TX R/N/L ...1	193,60	**140**	193,60	**140**
R/L 660.0025.2	25	46	170	20	2	TX R/N/L ...2	156,40	**225**	156,40	**225**
R/L 660.0032.2	32	46	200	20	2	TX R/N/L ...2	192,40	**232**	192,40	**232**
R/L 660.0040.2	40	46	250		2	TX R/N/L ...2	193,60	**240**	193,60	**240**
R/L 660.0025.3	25	46	170	20	2	TX R/N/L ...3	156,40	**325**	156,40	**325**
R/L 660.0032.3	32	46	200	20	2	TX R/N/L ...3	192,40	**332**	192,40	**332**
R/L 660.0040.3	40	46	250		2	TX R/N/L ...3	193,60	**340**	193,60	**340**

Bore-Ø$_{min.}$ in mm	46	50	60	80	100	for grooving insert
CDX$_{max.}$ (mm)	2	3	4	4,5	5	TX R/N/L ...1
	2	3	4	4,5	5	TX R/N/L ...2
	2	3	4	4,5	5	TX R/N/L ...3
	2	3	4	4,5	5	TX R/N/L ...4

Clamping element

Key I

Clamping screw

Spare parts for grooving inserts	Clamping element 73 950 ... EUR Y6		Key I 70 950 ... EUR 2A/28		Clamping screw 73 950 ... EUR Y6	
TX R/N/L ...1	32,75	**011**	SW3	3,15 **176**	M6x30	5,44 **009**
TX R/N/L ...2	32,75	**011**	SW3	3,15 **176**	M6x30	5,44 **009**
TX R/N/L ...3	32,75	**011**	SW3	3,15 **176**	M6x30	5,44 **009**

→ 71–74 → **Chapter 16**

ModularClamp MSS – Tool holder 0°

Scope of supply:
Base holder incl. clamping screw

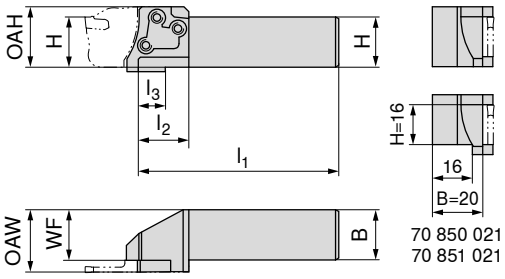

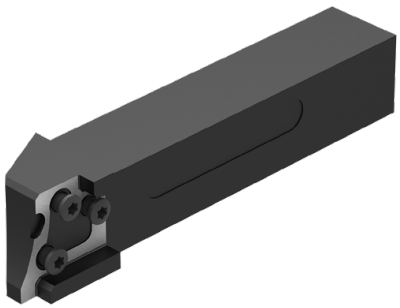

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAW mm	OAH mm	WF mm	l_1 mm	l_2 mm	l_3 mm	for modules	Left-hand 70 851 ... EUR 2C/71		Right-hand 70 850 ... EUR 2C/71	
E16 R/L 00-1616G	16	16	19,25	19,5	15,75	90	16		E16 R/L ...	167,60	**016**	167,60	**016**
E20 R/L 00-1620G	16	20	24,25	24,0	20,15	90	20		E20 R/L/N ...	169,10	**021** 1)	169,10	**021** 1)
E20 R/L 00-2020J	20	20	24,25	24,0	20,15	110	20		E20 R/L/N ...	169,10	**020**	169,10	**020**
E25 R/L 00-2525L	25	25	31,00	30,0	25,50	140	25		E25 R/L ...	172,60	**025**	172,60	**025**
E32 R/L 00-3225N	32	25	31,00	38,0	25,50	160	32		E32 R/L ...	177,30	**032**	177,30	**032**
E32 L 00-3232N	32	32	38,00	38,8	32,50	180	32	16	E32 R/L ...	180,40	**13200**		
E32 R 00-3232Q	32	32	38,00	38,8	32,50	180	32	16	E32 R/L ...			180,40	**13200**

1) see drawing

for right hand holder → use right hand (or neutral) module
for left hand holder → use left hand (or neutral) module

Key D

Clamping screw

Spare parts for Article no.		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 851 016 / 70 850 016	T15	11,96	**113**	M3,5x12,5	11,57 **441**
70 851 021 / 70 850 021	T15	11,96	**113**	M4x14	11,07 **403**
70 851 020 / 70 850 020	T15	11,96	**113**	M4x14	11,07 **403**
70 851 025 / 70 850 025	T20	12,83	**114**	M5x18	7,37 **404**
70 851 032 / 70 850 032	T25	13,18	**115**	M6x20	5,46 **405**

SX → 21

LX → 32

GX 09 / GX 16 → 42+43

GX 24 → 60–62

ModularClamp MSS – Tool holder 90°

Scope of supply:
Base holder incl. clamping screw

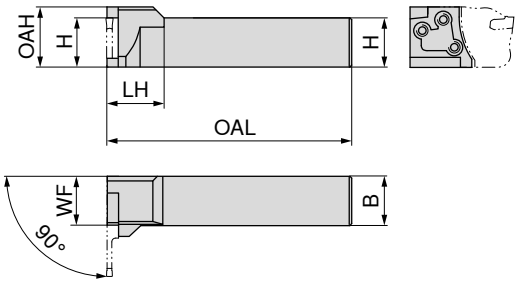

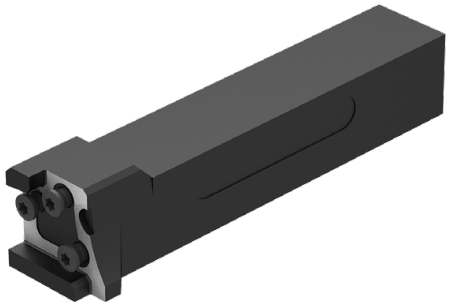

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAH mm	WF mm	OAL mm	LH mm	for modules	Left-hand 70 855 ... EUR 2C/71		Right-hand 70 854 ... EUR 2C/71	
E20 R/L 90-2020J	20	20	24	20	110	20	E20 R/L/N ...	169,10	**020**	169,10	**020**
E25 R/L 90-2525L	25	25	30	25	140	28	E25 R/L ...	172,60	**025**	172,60	**025**
E32 R/L 90-3225N	32	25	38	32	160	34	E32 R/L ...	177,30	**032**	177,30	**032**

for right hand holder → use left hand (or neutral) module
for left hand holder → use right hand (or neutral) module

Spare parts for Article no.		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28	
70 855 020 / 70 854 020	T15	11,96	**113**	M4x14	11,07	**403**
70 855 025 / 70 854 025	T20	12,83	**114**	M5x18	7,37	**404**
70 855 032 / 70 854 032	T25	13,18	**115**	M6x20	5,46	**405**

SX
→ 21

LX
→ 32

GX 09 / GX 16
→ 42+43

GX 24
→ 60–62

ModularClamp MSS – HSK-T Base Holder 0°

Scope of supply:
Base holder incl. clamping screw



Illustrations show right-hand versions

ISO designation	Adapter	LF mm	l_2 mm	BDRED mm	WF mm	for modules	Left-hand 74 581 ... EUR 2D/80		Right-hand 74 580 ... EUR 2D/80	
HSK T63 E25 R/L 00	HSK-T 63	67	42	53	38,7	E25 R/L...	445,00	**525**	445,00	**525**

for right hand holder → use right hand module
for left hand holder → use left hand module

Spare parts for Article no.	Protection plugs 70 950 ... EUR 2A/28		Nozzle 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		Clamping screw 70 950 ... EUR 2A/28		Hollow key with nose 70 950 ... EUR 2A/28	
74 580 525 / 74 581 525	26,06	**05600**	37,46	**05500**	12,83	**114**	7,37	**404**	57,91	**05700**

SX
→ 21

LX
→ 32

GX 09 / GX 16
→ 42+43

GX 24
→ 60–62

ModularClamp MSS – Boring bars GX

▲ with thro' coolant

Scope of supply:
Boring bar incl. clamping screw

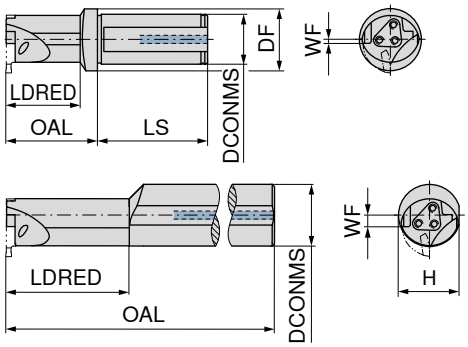

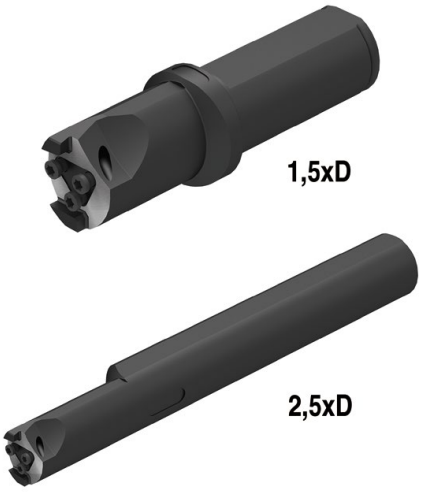

Illustrations show right-hand versions

	ISO designation	DCONMS mm	DF mm	WF mm	H mm	OAL mm	LDRED mm	LS mm	for modules	Left-hand 70 861 ... EUR 2C/71		Right-hand 70 860 ... EUR 2C/71	
≤ 1,5xD	I16 R/L 90-1,5 D-N	20	25	1,0		32	24	50	I 16 R/L	185,20	017	185,20	017
	I20 R/L 90-1,5 D-N	20	25	1,0		37	30	50	I 20 R/L	226,90	021	226,90	021
	I25 R/L 90-1,5 D-N	25	32	1,5		46	38	56	I 25 R/L	260,10	026	260,10	026
	I32 R/L 90-1,5 D-N	32	40	2,0		59	48	60	I 32 R/L	335,30	033 1)	335,30	033 1)
	I40 R/L 90-1,5 D-N	40	50	2,5		72	60	70	I 40 R/L/N	418,10	041	418,10	041
≤ 2,5xD	I16 R/L 90-2,5 D-N	20		4,5	19,0	180	40		I 16 R/L	199,50	117	199,50	117
	I20 R/L 90-2,5 D-N	25		6,0	24,0	200	50		I 20 R/L	242,80	121	242,80	121
	I25 R/L 90-2,5 D-N	32		7,0	31,0	250	63		I 25 R/L	277,80	126	277,80	126
	I32 R/L 90-2,5 D-N	40		9,5	38,0	300	80		I 32 R/L	362,20	133 1)	362,20	133 1)
	I40 R/L 90-2,5 D-N	50		11,5	48,5	350	100		I 40 R/L/N	461,20	141	461,20	141

1) with 2 clamping surfaces

11

for right hand holder → use right hand (or neutral) module
for left hand holder → use left hand (or neutral) module

Key D

Clamping screw

Spare parts for modules		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
I 16 R/L	T08	10,05	110	M2,5x10	9,14	440
I 20 R/L	T10	11,78	112	M3x11	9,48	444
I 25 R/L	T15	11,96	113	M3,5x12,5	11,57	441
I 32 R/L	T20	12,83	114	M4,5x17	10,52	445
I 40 R/L/N	T20	12,83	114	M5x18	7,37	404

GX 09 / GX 16

→ 44+45

GX 24

→ 63

Split clamping block for blades DC

Scope of supply:
Complete clamping block, but without blade

Direct Cooling

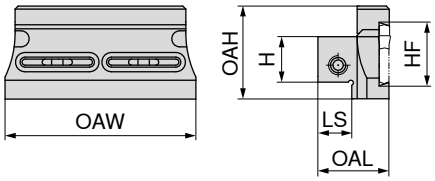

Designation	H mm	HF mm	OAH mm	LS mm	OAL mm	OAW mm	for blades	70 829 ... EUR 2A/25	
SBN 2020-26-DC	20	26	43,0	20	40,0	82	XLC.. 26..	302,30	**020**
SBN 2020-32-DC	20	32	43,0	20	40,0	95	XLC.. 32..	302,30	**120**
SBN 2525-32-DC	25	32	48,5	25	44,5	95	XLC.. 32..	311,80	**025**
SBN 3232-32-DC	32	32	52,0	32	51,0	95	XLC.. 32..	326,30	**032**

Coolant screw plug

Clamping rail

clamping screw

Spare parts for Article no.		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
70 829 020	G 1/8"	4,59	**294**	CU70	40,85	**290**	M6x12	2,86	**861**
70 829 120	G 1/8"	4,59	**294**	CU85	40,85	**291**	M6x12	2,86	**861**
70 829 025	G 1/8"	4,59	**294**	CU85	40,85	**291**	M6x12	2,86	**861**
70 829 032	G 1/8"	4,59	**294**	CU85	40,85	**291**	M6x12	2,86	**861**

Key I

O-Ring

O-Ring

Spare parts for Article no.		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
70 829 020	SW5	4,75	**265**	19x2,5	5,55	**293**			
70 829 120	SW5	4,75	**265**	19x2,5	5,55	**293**	23x2,5	5,55	**292**
70 829 025	SW5	4,75	**265**				23x2,5	5,55	**292**
70 829 032	SW5	4,75	**265**				23x2,5	5,55	**292**

Clamping block for blades

Scope of supply:
Clamping block complete, but without blade and coolant set

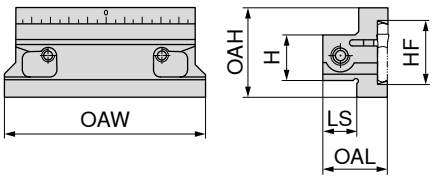

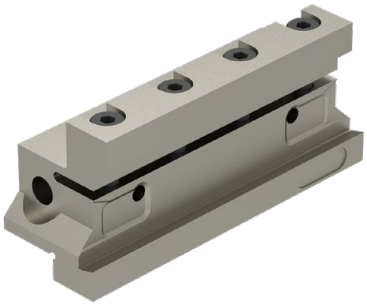

Designation	H mm	HF mm	OAH mm	LS mm	OAL mm	OAW mm	for blades	70 830 ... EUR 2A/25	
SBN 2020-26-K	20	26	39	20	33,0	90	XLC.. 26..	207,50	**020**
SBN 2520-32-K	25	32	48	20	36,0	110	XLC.. 32..	207,50	**025**
SBN 3229-32-K	32	32	48	29	44,5	120	XLC.. 32..	212,10	**032**
SBN 3229-46-K	32	46	70	29	52,0	150	XLC.. 46..	351,10	**132**
SBN 4037-46-K	40	46	70	37	60,0	150	XLC.. 46..	426,20	**140**

Key I

Cooling agent set

clamping screw

Spare parts for blades		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
XLC.. 26..	SW5	4,75	**265**	53,89	**278**	M6x25	2,66	**269**
XLC.. 32..	SW5	4,75	**265**	53,89	**278**	M6x25	2,66	**269**
XLC.. 46..	SW6	6,67	**266**	52,49	**279**	M8x35	2,66	**282**

11

Split clamping block for blades

Scope of supply:
Clamping block complete, but without blade and coolant set

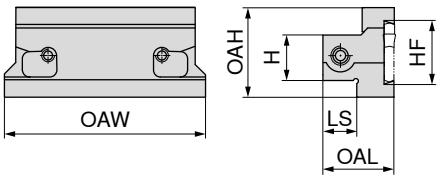



Designation	H mm	HF mm	OAH mm	LS mm	OAL mm	OAW mm	for blades	70 831 ... EUR 2A/25	
SBN 2020-26-KS	20	26	39	20	35,0	90	XLC.. 26..	252,20	**020**
SBN 2520-32-KS	25	32	48	20	38,0	110	XLC.. 32..	260,10	**025**
SBN 3229-32-KS	32	32	48	29	46,5	120	XLC.. 32..	269,80	**032**

Key I

Cooling agent set

clamping screw

Spare parts for blades		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28			70 950 ... EUR 2A/28	
XLC.. 26..	SW5	4,75	**265**	53,89	**278**	M6x25	2,66	**269**
XLC.. 32..	SW5	4,75	**265**	53,89	**278**	M6x25	2,66	**269**

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

11

Cutting data values for grooving inserts

Index	System SX, LX, GX							System TX		● 1st choice ○ suitable		
	CTCP325	CTCP335	CTPP345	CTPP520	CTPP535	CTP1340	H216T	CWX500				
	DRAGONSKIN											
	v_c (m/min.)							v_c (m/min.)	f (mm/rev)	Emulsion	Compressed air	MMS
P.1.1	220	185	135	235	180	180		160	0,03–0,10	●		
P.1.2	195	160	120	205	150	150		140	0,03–0,10	●		
P.1.3	170	140	105	175	125	125		110	0,03–0,10	●		
P.1.4	165	130	100	165	120	115		110	0,03–0,10	●		
P.1.5	150	120	95	150	105	100		90	0,03–0,10	●		
P.2.1	200	165	120	210	160	155		110	0,03–0,10	●		
P.2.2	160	130	100	160	115	110		90	0,03–0,10	●		
P.2.3	150	120	95	150	105	100		90	0,03–0,07	●		
P.2.4	120	90	75	115	75	70		80	0,03–0,06	●		
P.3.1	150	130	100	185	120	110		80	0,03–0,07	●		
P.3.2	95	90	80	130	90	75		60	0,03–0,07	●		
P.3.3	45	50	60	75	60	40		50	0,03–0,07	●		
P.4.1	150	130	100	185	120	110		100	0,03–0,06	●		
P.4.2	125	110	90	160	105	95		90	0,03–0,06	●		
M.1.1	150	130	100	185	120	110		110	0,02–0,06	●		
M.2.1	95	90	80	130	90	80		90	0,02–0,06	●		
M.3.1	135	115	95	170	110	100		70	0,02–0,06	●		
K.1.1	170	135		140	165	150	140	140	0,03–0,10	●		
K.1.2	150	115		115	150	125	115	100	0,03–0,10	●		
K.2.1	160	130		180	145	140	150	90	0,03–0,10	●		
K.2.2	145	105		115	155	120	110	80	0,03–0,10	●		
K.3.1	210	150		130	190	170	170	140	0,03–0,10	●		
K.3.2	140	115		110	145	120	140	120	0,03–0,10	●		
N.1.1						300	400	330	0,05–0,12	●		
N.1.2						200	400	310	0,05–0,12	●		
N.2.1						300	450	270	0,05–0,12	●		
N.2.2						200	450	230	0,05–0,12	●		
N.2.3						150	500	140	0,05–0,12	●		
N.3.1						300	425	240	0,05–0,12	●		
N.3.2						300	400	200	0,05–0,12	●		
N.3.3						200	275	180	0,05–0,12	●		
N.4.1						200	225	180	0,05–0,12	●		
S.1.1	35			40	30	35	40	60	0,02–0,07	●		
S.1.2	30		30	30	25	30	30	50	0,02–0,08	●		
S.2.1	20		25	20	15	20	30	60	0,02–0,09	●		
S.2.2	15			15	15	15	25	50	0,02–0,10	●		
S.2.3	15			20	15	15	20	40	0,02–0,11	●		
S.3.1				125	85	85	90	60	0,02–0,12	●		
S.3.2				50	35	40	55	40	0,02–0,13	●		
S.3.3				35	25	30	40	30	0,02–0,14	●		
H.1.1				15				50	0,01–0,07	●		
H.1.2				15								
H.1.3												
H.1.4												
H.2.1				15								
H.3.1				40								
O.1.1						130	130	180	0,05–0,12	●		
O.1.2								180	0,05–0,12	●		
O.2.1						105	105	150	0,05–0,12	●		
O.2.2								110	0,05–0,12	●		
O.3.1								170	0,03–0,10	●		

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

GX – Depths of cut and feed rates

GX Standard / GX-E

Groove width CW (mm)	Turning – Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	3,5	Parting / Grooving	Axial grooving
	Feed rate f (mm/rev.)							f (mm/rev)	f (mm/rev)
2	0,10–0,15	0,05–0,15	0,05–0,12	0,05–0,10				0,05–0,20	When axial grooving reduce feed by 40%.
3	0,10–0,17	0,05–0,17	0,05–0,17	0,05–0,15	0,05–0,12			0,10–0,25	
4	0,10–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,17	0,07–0,15		0,10–0,25	
5	0,10–0,25	0,10–0,25	0,07–0,25	0,07–0,25	0,07–0,22	0,07–0,20		0,10–0,30	
6	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,25	0,15–0,22	0,15–0,35	

GX-M40

Groove width CW (mm)	Turning – Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	Parting / Grooving	Axial grooving
	Feed rate f (mm/rev.)								f (mm/rev)	f (mm/rev)
2	0,10–0,20	0,05–0,20	0,05–0,17	0,05–0,15					0,05–0,15	When axial grooving reduce feed by 40%.
3	0,10–0,22	0,10–0,22	0,10–0,21	0,10–0,20	0,10–0,17				0,075–0,20	
4	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,22	0,10–0,17			0,10–0,25	
5	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,27	0,10–0,23	0,10–0,20		0,10–0,30	
6	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,32	0,10–0,27	0,10–0,23	0,10–0,20	0,15–0,325	

GX-F2

Groove width CW (mm)	Turning – Depth of cut a_p (mm) 0,50	0,75	1,00	1,25	1,50	1,75	2,00	2,25	2,50	Parting / Grooving	Axial grooving
	Feed rate f (mm/rev.)									f (mm/rev)	f (mm/rev)
2	0,03–0,15	0,03–0,15	0,03–0,15	0,03–0,10						0,05–0,15	When axial grooving reduce feed by 40%.
3	0,04–0,17	0,04–0,17	0,04–0,17	0,04–0,15	0,04–0,13	0,04–0,12				0,075–0,20	
4	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,17	0,05–0,15			0,10–0,25	
5	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,17	0,07–0,15		0,10–0,30	
6	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,19	0,10–0,15	0,15–0,325	

GX-27P

Groove width CW (mm)	Turning – Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	Parting / Grooving	Axial grooving
	Feed rate f (mm/rev.)								f (mm/rev)	f (mm/rev)
2	0,05–0,23	0,05–0,23	0,05–0,23	0,05–0,20					0,05–0,20	When axial grooving reduce feed by 40%.
3	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,20				0,05–0,25	
4	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,25			0,05–0,30	
5	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,32	0,10–0,30		0,10–0,35	
6	0,10–0,40	0,10–0,40	0,10–0,40	0,10–0,40	0,10–0,40	0,10–0,36	0,10–0,33	0,10–0,30	0,10–0,40	

GX – Depths of cut and feed rates

GX-M1	
Groove width CW (mm)	 Parting / Grooving
	Feed rate f (mm/rev.)
2	0,05–0,15
3	0,10–0,20
4	0,10–0,25

GX circlip grooving	
Groove width CW (mm)	Grooving
	Feed rate f (mm/rev.)
0,60–1,70	0,02–0,09
1,95–2,25	0,05–0,10
2,75–3,25	0,05–0,12

GX Standard / GX-27P / GX-27PF									
	Turning								 Parting / Grooving
Radius CRE (mm)	Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	
	Feed rate f (mm/rev.)								f (mm/rev)
0,8									0,05–0,10
1,0									0,05–0,15
1,2									0,05–0,15
1,5	0,10–0,45	0,05–0,45	0,05–0,40						0,05–0,15
2,0	0,15–0,50	0,10–0,50	0,10–0,50	0,10–0,40					0,075–0,20
2,5	0,15–0,60	0,10–0,60	0,10–0,60	0,10–0,50	0,10–0,45				0,10–0,25
3,0	0,25–0,70	0,20–0,70	0,15–0,70	0,15–0,70	0,15–0,65	0,15–0,60	0,15–0,55		0,10–0,30
4,0	0,25–0,80	0,20–0,80	0,15–0,80	0,15–0,80	0,15–0,80	0,15–0,80	0,15–0,75	0,15–0,70	0,15–0,35

GX-M3							
	Turning						 Parting / Grooving
Radius CRE (mm)	Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	
	Feed rate f (mm/rev.)						f (mm/rev)
1,5	0,15–0,35	0,15–0,35	0,15–0,30				0,05–0,20
2,0	0,15–0,40	0,15–0,40	0,15–0,40	0,15–0,30			0,10–0,25
2,5	0,15–0,50	0,15–0,50	0,15–0,50	0,15–0,40	0,15–0,35		0,10–0,25
3,0	0,20–0,70	0,20–0,70	0,20–0,70	0,20–0,60	0,20–0,50	0,20–0,40	0,10–0,35

GX-M33							
	Turning						 Parting / Grooving
Radius CRE (mm)	Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	
	Feed rate f (mm/rev.)						f (mm/rev)
1,5	0,05–0,25	0,05–0,20	0,05–0,15				0,05–0,15
2,0	0,05–0,35	0,05–0,30	0,05–0,25	0,05–0,20			0,05–0,20
2,5	0,10–0,45	0,10–0,40	0,10–0,35	0,10–0,30	0,10–0,25		0,05–0,25
3,0	0,10–0,50	0,10–0,45	0,10–0,40	0,10–0,35	0,10–0,30	0,10–0,25	0,10–0,25

GX 24 – Axial grooving and face turning

Approximate feed rates

Axial grooving



Face turning

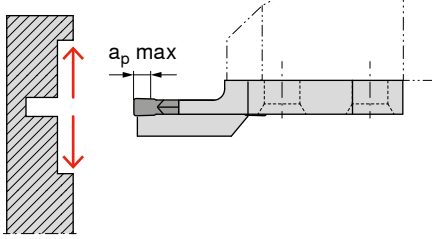

Designation	Axial grooving	Face turning	
	Feed rate f (mm/rev.)	f (mm/rev)	a_p max. (mm)
GX 24-2 E 3.00 ..	0,05–0,15	0,05–0,20	2,5
GX 24-3 E 4.00 ..	0,05–0,15	0,05–0,25	3,0
GX 24-3 E 5.00 ..	0,05–0,15	0,10–0,25	3,0
GX 24-4 E 6.00 ..	0,05–0,20	0,10–0,30	3,5

Processing notes

Axial grooving



It is only possible to plunge within the fixed diameter range of the axial grooving module or monoholder (e.g. 50 - 70 mm).

Important: The indicated diameter range is always valid for the external diameter of the groove!

Axial grooving – Groove widening



In case of face turning it is possible to widen the groove above and below the diameter range indicated on the Axial grooving module or monoholder.

Important: Only the first groove must lie within the diameter range of the axial grooving module or axial monoholder. The depth of the widening groove must not be larger than the depth of the original groove.

Axial grooving and face turning



Groove widening by face turning in the diameter range above and below the values specified for the Axial grooving module and Axial monoholder are possible.

Important: Only the first groove must lie within the diameter range of the module.

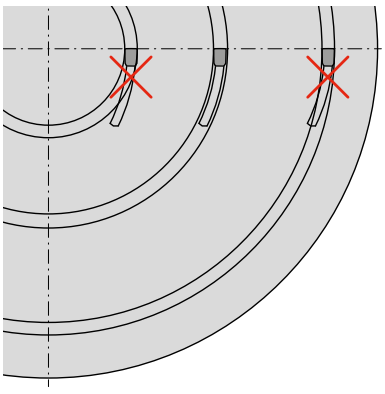

Attention: The diameter of face grooves must lie within the diameter range indicated on the axial grooving module and axial monoholder. Not following this range will result in the tool being damaged or destroyed.

SX – Depths of cut and feed rates

SX-F2								
Groove width CW (mm)	Turning Depth of cut a_p (mm)							Parting / Grooving
	0,50	0,75	1,00	1,25	1,50	1,75	2,00	
	Feed rate f (mm/rev.)							f (mm/rev)
2	0,03–0,15	0,03–0,15	0,03–0,15	0,03–0,10				0,05–0,15
3	0,04–0,17	0,04–0,17	0,04–0,17	0,04–0,15	0,04–0,13	0,04–0,12		0,075–0,20
4	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,17	0,05–0,15	0,10–0,25

SX-27P							
Groove width CW (mm)	Turning Depth of cut a_p (mm)						Parting / Grooving
	0,5	1,0	1,5	2,0	2,5	3,0	
	Feed rate f (mm/rev.)						f (mm/rev)
2	0,05–0,23	0,05–0,23	0,05–0,23	0,05–0,20			0,05–0,20
3	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,20		0,05–0,25
4	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,25	0,05–0,30

SX-M2							
Groove width CW (mm)	Turning Depth of cut a_p (mm)						Parting / Grooving
	0,5	1,0	1,5	2,0	2,5	3,0	
	Feed rate f (mm/rev.)						f (mm/rev)
2	0,05–0,17	0,05–0,13	0,05–0,10				0,05–0,15
3	0,07–0,20	0,07–0,20	0,07–0,18	0,07–0,15			0,075–0,20
4	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,22	0,10–0,18		0,10–0,25
5	0,12–0,27	0,12–0,27	0,12–0,27	0,12–0,25	0,12–0,22		0,10–0,30
6	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,25	0,15–0,20	0,15–0,35

SX-M1		SX-M7		SX-M8	
Groove width CW (mm)	Parting / Grooving	Groove width CW (mm)	Parting / Grooving	Groove width CW (mm)	Parting / Grooving
	f (mm/rev)		f (mm/rev)		f (mm/rev)
2	0,05–0,15	2	0,10–0,20	2	0,05–0,20
3	0,10–0,20	3	0,10–0,20	3	0,05–0,20
4	0,10–0,25	4	0,10–0,20	4	0,05–0,15
5	0,15–0,30	5	0,15–0,25	5	0,05–0,15
6	0,15–0,35	6	0,15–0,25	6	0,05–0,15

SX/LX – Depths of cut and feed rates

SX-M3							
	Turning						
Radius CRE (mm)	Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	Parting / Grooving
	Feed rate f (mm/rev.)						f (mm/rev)
1,5	0,15–0,35	0,15–0,35	0,15–0,30				0,05–0,20
2	0,15–0,40	0,15–0,40	0,15–0,40	0,15–0,30			0,10–0,25
2,5	0,15–0,50	0,15–0,50	0,15–0,50	0,15–0,40	0,15–0,35		0,10–0,25
3	0,20–0,70	0,20–0,70	0,20–0,70	0,20–0,60	0,20–0,50	0,20–0,40	0,10–0,35

LX-M2									
	Turning								
Groove width CW (mm)	Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	Parting / Grooving
	Feed rate f (mm/rev.)								f (mm/rev)
8	0,17–0,45	0,17–0,45	0,17–0,45	0,17–0,45	0,17–0,40	0,17–0,37	0,17–0,35		0,20–0,50
10	0,20–0,50	0,20–0,50	0,20–0,50	0,20–0,50	0,20–0,46	0,20–0,42	0,20–0,38	0,20–0,35	0,20–0,50

LX-M3									
	Turning								
Radius CRE (mm)	Depth of cut a_p (mm) 0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	Parting / Grooving
	Feed rate f (mm/rev.)								f (mm/rev)
4	0,25–0,80	0,25–0,80	0,25–0,80	0,25–0,80	0,25–0,80	0,25–0,70	0,25–0,60	0,25–0,50	0,15–0,35

11

ModularClamp – Grooving depth reduction

The ModularClamp grooving modules are matched according to size on a particular workpiece diameter CODX. If the diameter of the workpiece is greater than CODX of the grooving Modules, this reduces the achievable penetration depth by the dimension „a“.
The extent of reduction can be determined with the following table.

			Reduction a (mm) of the maximum grooving depth (CDX)														
			0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0
Size	E12	35	40	45	60	75	115	> 250										
	E16	50	55	60	70	80	100	130	200	> 420								
	E20	60	65	70	75	85	95	110	130	165	220	> 330						
	E25	75	80	85	90	100	110	125	140	160	190	240	320	> 500				
	E32	95	100	105	110	120	125	135	145	160	180	200	225	270	320	400	530	> 800
			Workpiece diameter D (mm)															
		Maximum workpiece diameter (CODX) with full penetration depth (CDX) in mm																

Calculation example:

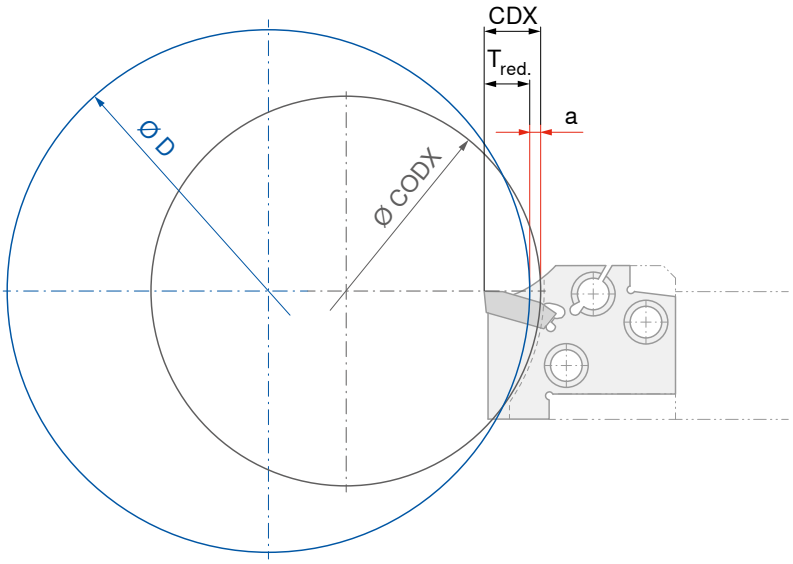

CDX =
maximum plunge depth (mm)

CODX =
maximum workpiece Ø with full penetration depth (mm)

a =
Reduction amount (mm)

$T_{red.} = CDX – a$

E25R**21**-GX24-3

21 → CDX = 21 mm, Ø CODX = 75 mm

E25 → Size 25

Workpiece diameter
D = Ø 100 mm

$T_{red.} = CDX – a = 21 – 2 = 19$ mm

MonoClamp – Grooving depth reduction

Depending on the groove width and shank size, the MonoClamp tools are designed for use with a specific workpiece diameter CODX. If the workpiece diameter is larger than the CODX of the grooving module, the achievable groove depth is reduced by the dimension „a“. The extent of the reduction is determined using the following table.

Shank			Reduction a (mm) of the maximum grooving depth (CDX)								
			0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5
	E12R/L0022...	44	70	80	95	115	150	225	> 450		
	E16R/L0026...	52	90	105	125	155	210	305	> 600		
	E20R/L0026...	52	110	125	140	160	195	240	320	475	> 950
	E20R/L0033...	66	110	125	140	160	195	240	320	475	> 950
	E25R/L0026...	52	140	160	190	235	310	465	> 930		
	E25R/L0033...	66	155	175	200	230	275	340	450	675	> 1350
	E25R/L0040...	80	155	175	200	230	275	340	450	675	> 1350
			Workpiece diameter D (mm)								
		Maximum workpiece diameter (CODX) with full penetration depth (CDX) in mm									

Calculation example:

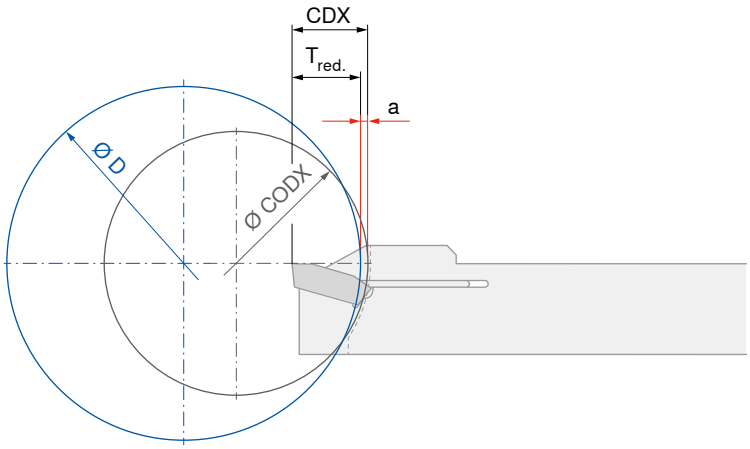

CDX =
maximum plunge depth (mm)

CODX =
maximum workpiece Ø with full penetration depth (mm)

a =
Reduction amount (mm)

$$T_{red.} = CDX - a$$

E25R0033...

CDX = 33 mm, Ø CODX = 66 mm

Workpiece diameter
D = Ø 200 mm

$T_{red.}$ = CDX – a = 33 – 1,5 = 31,5 mm

11

Clamping Method – SX-System

System function – inserting and removing the cutting inserts

Precision system for internal and external grooving.
The key has been designed in such a way that it will not stress the material beyond its ‘elastic limit’.
With this alternate system the material always remains in its flexible range and provides a substantial increase in tool life.

1

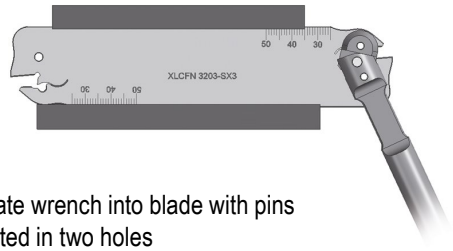

Locate wrench into blade with pins located in two holes

2

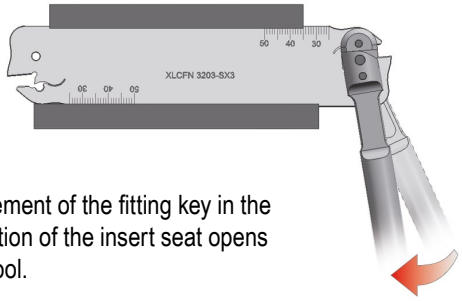

Movement of the fitting key in the direction of the insert seat opens the tool.

3

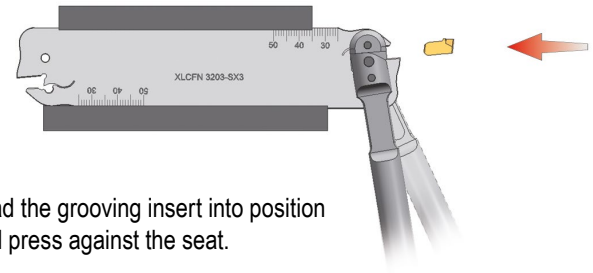

Load the grooving insert into position and press against the seat.

4

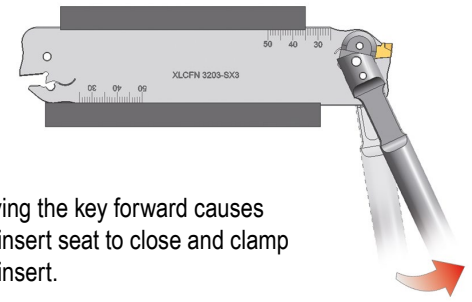

Moving the key forward causes the insert seat to close and clamp the insert.

When changing the inserts, always maintain tension on the key!

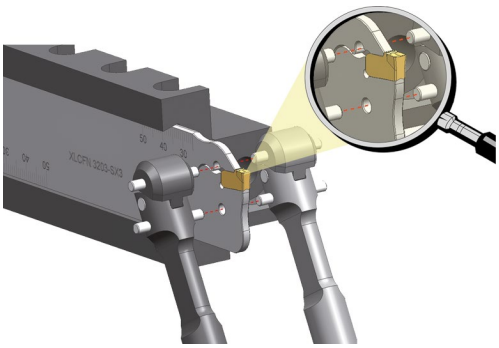

The clamp is designed so that the wrench can be inserted from both sides of the blade according to the accessibility.

Maximum blade projection when turning	
Blade	max. overhang (mm)
SX 2 – SX 3	25
SX 4 – SX 5	30
SX 6	35

Clamping function – ModularClamp-Module

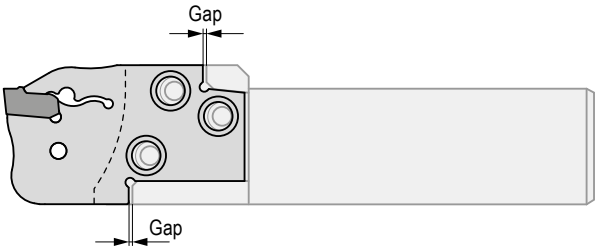

Module unclamped

▲ Gap between module and support face for axial clamping

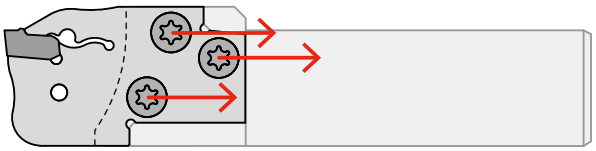

Module clamped

▲ Axial clamping with support face
▲ Connection free from play, therefore maximum stability

System
LX

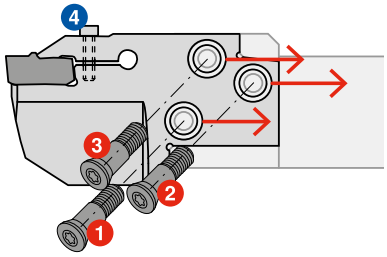

GX 24

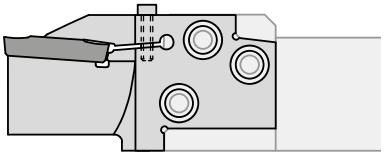

Active insert clamping

Clamping screws 1, 2 and 3 are used to clamp the modules.
The insert is clamped in the module via the additional screw 4.

11

System
SX



Self clamping of the insert

Clamping screws 1, 2 and 3 are used for clamping the module.
The insert is self-clamping.

System
GX 09 / GX 16



Active insert clamping

Clamping screws 1 and 2 are used for clamping the module.
Important: first tighten clamp screws 1 and 2.
Then clamp the insert with screw 3.

GX 24



Torque Moment ModularClamp Module Screws

ModularClamp – Tool holder

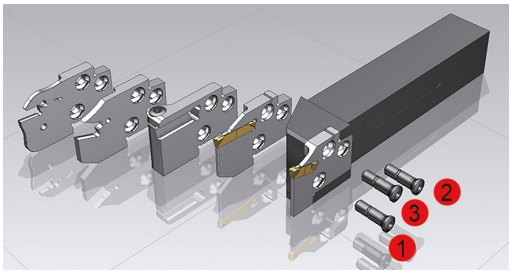

ModularClamp – Tool holder	Screw	Torx	Torque moment	
			Nm	in.lbs
E12..	M2,5x10	T08	1,2	10,6
E16..	M3,5x12,5	T15	3,2	28,3
E20..	M4x14	T15	4,0	35,4
E25..	M5x18	T20	5,0	44,3
E32..	M6x20	T25	6,0	53,1

Tighten screws to the correct Torque moment in this order.

ModularClamp – Boring bar

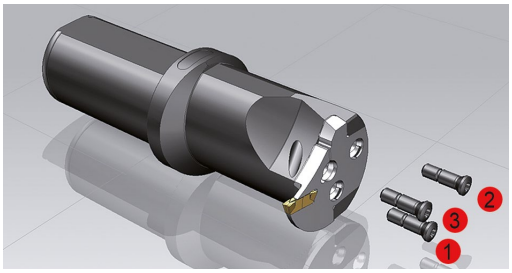

ModularClamp – Boring bar	Screw	Torx	Torque moment	
			Nm	in.lbs
I16..	M2,5x10	T08	1,2	10,6
I20..	M3x11	T10	2,0	17,7
I25..	M3,5x12,5	T15	3,2	28,3
I32..	M4,5x17	T20	4,0	35,4
I40..	M5x18	T20	5,0	44,3

Tighten screws to the correct Torque moment in this order.

Tightening torque for the insert clamping

Recommended tightening torque

Grooving systems	Screw	Torx	Torque moment	
			Nm	in.lbs
GX / AX / LX	M3,5	T15	3,2	28,3
	M4,0	T15/T20	4,0	35,4
	M5,0	T20	5,0	44,3

Advantages due to DirectCooling

Internal coolant supply with groove machining has a decisively positive effect on your turning process.
In our CERATIZIT grooving range, the following grooving systems have an internal coolant supply:

- **SX** Grooving holder (single tool)
- **GX** Grooving holder (single tool)

Advantages due to DirectCooling

- Improved chip control
- Longer service life of the indexable insert
- Greater process security
- Application of higher cutting data

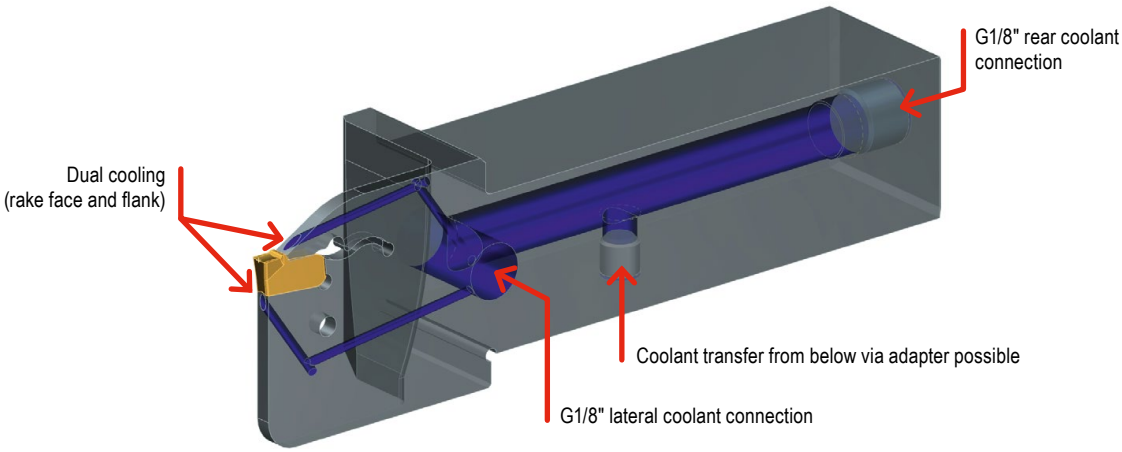

Advantages of the trochoidal turning strategy

- Less wear and longer tool life due to softer entry and exit
- Smaller angle of engagement = less vibration
- Up to 40% higher feed rate values possible
- Broad field of application in austenitic steels, heat-resistant steels, Inconel and nickel-base alloys as well as long-chipping ductile materials
- Savings on tools

Trochoidal turning with support of the following CAM systems:

- hyperMill – High-performance turning
- Esprit CAM – ProfitTurning
- SolidCAM – Turning
- EdgeCAM – Waveform turning
- MasterCAM – Dynamic turning

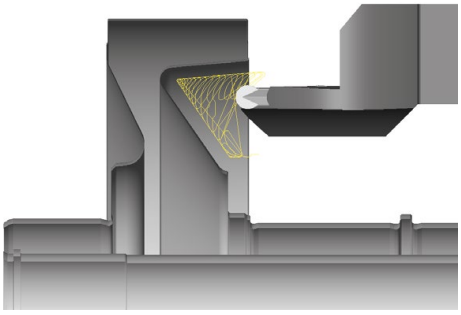



Possible applications

- Radial and axial recesses and grooves
- Rough machining – high-speed turning with button insert

General references

Tool position

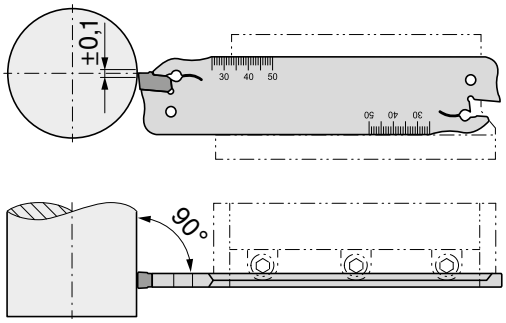

Tool overhang

As a rule of thumb: Overhang l_a should not be greater than 8 x CW (Groove width).

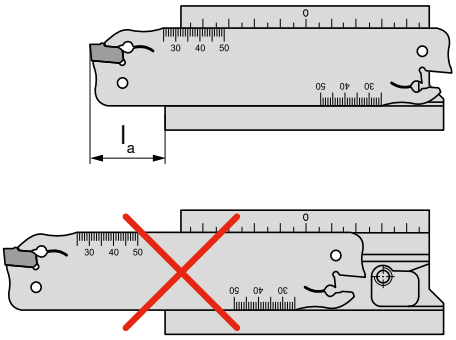

Workpiece overhang

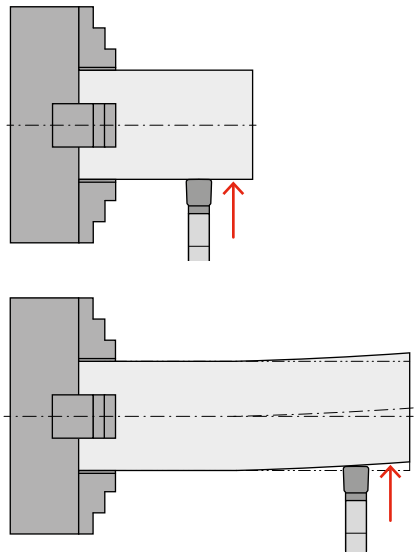

References for Parting off



From Ø 5 mm on, reduce feed “f“ by approx. 50 %. No parting across centre (risk of breakage).



For parting pip-free, use R or L inserts. In order to minimize lateral deflection reduce feed by approx. 20–50 %.



In order to prevent ring formation, use R or L inserts. Reduce feed “f“ because of lateral deflection by approx. 20–50 %.

References for grooving



When grooving with an axial displacement the width „a“ should amount to at least 70 % of the grooving width „CW“.



When grooving oblique surfaces the feed should be reduced by approx. 20–50 % until fully engaged.

Trouble shooting guide for grooving FX/SX/GX/LX

Type of problem											
Type of wear				Work piece problems				Swarf control			
Edge breakage	Built-up edge	Wear on clearance face	Plastic deformation	Vibration	Formation of pips and burrs	Chattered surface	Surface quality	Chip too long (snarl chip)	Chip too short (fragmented chip)		
	↑	↓	↓	↓			↑	↓		Cutting speed	Cutting data
↓			↓	↑		↓	↓	↑	↓	Feed rate	Cutting data
↓		↓	↓		↓	↓	↓			Feed rate at centre -R -F -M ↑ ↓	Cutting data
↑	↓		~	~	↓	↓	↓	↓	↑	Chip groove	Insert selection
					●					R/L execution	Insert selection
↑		↑	↑	↓	↓	↓	↑			Corner radius ↑ larger ↓ smaller	Insert selection
↓		↑	↑							Tool Material ↑ Wear resistance ↓ toughness	Insert selection
				↓		↑	↑			Groove width	Insert selection
~				~		~	~			Tool clamping	General criteria
~				~		~	~			Work piece clamping	General criteria
~				~			↓			Overhang	General criteria
~		~		~	~		~			Tip height	General criteria
	●	●	●		●		●	●		Cooling lubricant	General criteria

Remedy measures

↑ raise, increase large influence
↑ raise, increase small influence
↓ avoid, reduce large influence
↓ avoid, reduce small influence
~ check, optimise
● use

11

Wear causes

Wear on clearance face



Abrasion on the flank, normal wear after a given operation time

Cause

- ▲ cutting speed too high
- ▲ grade with too low wear resistance
- ▲ insufficient coolant

Remedy

- ▲ Reduce the cutting speed
- ▲ select a more wear resistant grade
- ▲ Improve/check coolant feed

Edge chipping

Excessive mechanical stress on the cutting edge causing carbide particles to break out.

Cause

- ▲ too hard grade
- ▲ vibration
- ▲ too high feed and depth of cut
- ▲ chip impact

Remedy

- ▲ use tougher grade
- ▲ use negative geometry with chip breaker
- ▲ reduce overhang, check center height
- ▲ stabilize the cutting edge

Cratering



The outgoing hot chip causes cratering of the insert on the clamping surface.

Cause

- ▲ too high cutting speed, feed, or both
- ▲ too low rake angle
- ▲ grade with too low wear resistance
- ▲ incorrectly supplied cooling

Remedy

- ▲ Reduce cutting speed and / or feed
- ▲ Check coolant flow and / or increase pressure
- ▲ Use harder grade

Plastic deformation

Large mechanical load produces high temperature machining, this can lead to plastic deformation.

Cause

- ▲ too high operating temperature, thus softening the base material
- ▲ unsuitable grade
- ▲ inadequate coolant supply

Remedy

- ▲ Reduce the cutting speed
- ▲ select a more wear resistant grade
- ▲ use coolant

Built-up edge

Weld deposits of material on the cutting edge occurs when the chip does not flow caused by low average temperature.

Cause

- ▲ too low cutting speed
- ▲ too low rake angle
- ▲ Incorrect grade
- ▲ lack of cooling / lubrication

Remedy

- ▲ Increase the cutting speed
- ▲ Increase rake angle
- ▲ Use TiN coating
- ▲ increase coolant strength

Notch wear

Contraction at maximum cutting depth.

Cause

- ▲ Oxidation at the cutting edge
- ▲ Too high a temperature at the edge

Remedy

- ▲ Use different cutting depths
- ▲ Reduce cutting speed
- ▲ Improve/check coolant feed

Chip breakers / Applications

System GX

		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
-F2 ▲ very positive geometry ▲ honed cutting edge ▲ low feed rates ▲ low cutting forces ▲ first choice for stainless materials		**CTCP325** **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	**CTP1340** **CTP1340/CTPP345** **CTP1340** **CTP1340** CTP1340	**CTPP345** **CTPP345** CTPP345 		0,05–0,15
-Standard / -E ▲ positive geometry ▲ low-medium feed rates ▲ low cutting forces ▲ universal application ▲ first choice for axial grooving		**CTCP325** **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	**CTCP335/CTP1340** **CTP1340/CTPP345** **CTCP335/CTP1340** **CTP1340** CTP1340	**CTPP345** **CTPP345** CTP1340 CTPP345 		0,05–0,17
-M40 ▲ stable geometry ▲ medium feed rates ▲ universal application ▲ good chip control		**CTCP325** **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	**CTP1340** **CTP1340/CTPP345** **CTCP325/CTP1340** **CTP1340** CTP1340	**CTPP345** **CTPP345** CTP1340 CTPP345 		0,075–0,20
-M1 ▲ very stable cutting edge ▲ medium-high feed rates ▲ for intterrupted cut ▲ for high tensile materials ▲ first choice for parting off		**CTCP325** **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	**CTP1340** **CTP1340/CTPP345** **CTCP325/CTP1340** **CTP1340** CTP1340	**CTPP345** **CTPP345** CTP1340 CTPP345 		0,1–0,20
-27P ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals		 **H216T** **H216T** H216T H216T	 **H216T** **H216T** H216T 	 **H216T** **H216T** 		0,05–0,25

Circlip grooving

Standard ▲ positive geometry ▲ honed cuttign edge ▲ low feed rates ▲ small corner radius ▲ Circlip grooves		**CTP1340** **CTP1340** **CTP1340** CTP1340 **CTP1340** CTP1340	**CTP1340** **CTP1340** **CTP1340** CTP1340 **CTP1340** CTP1340	CTP1340 CTP1340 CTP1340 CTP1340 CTP1340 		0,05–0,30

11

Chip breakers / Applications

System GX

		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
Standard – Radius ▲ positive geometry ▲ honed cutting edge ▲ low-medium feed rates ▲ low cutting forces ▲ Radius grooving/copy turning		**CTCP325** **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	**CTCP325/CTP1340** **CTP1340** **CTCP325/CTP1340** **CTP1340** CTP1340	CTP1340 CTP1340 CTP1340 		0,05–0,20
-M3 – Radius ▲ stable geometry ▲ medium-high feed rates ▲ high surface quality ▲ Radius grooving/copy turning		**CTCP325** CTCP335 **CTCP325** CTCP325 CTCP325	**CTCP325/CTCP335** CTCP335 **CTCP325/CTCP335** 	**CTCP335** **CTCP335** 		0,07–0,20
-27P – Radius ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals		 **H216T** **H216T** H216T H216T	 **H216T** **H216T** H216T 	 **H216T** **H216T** 		0,05–0,30
-M33 ▲ Radius grooving & copy turning ▲ Finishing geometry ▲ Specially for tough and ductile steels ▲ Low - medium feed rates ▲ High surface quality		**CTCP325** CTCP325 **CTCP325** 	**CTCP325** CTCP325 **CTCP325** 	CTCP325 CTCP325 CTCP325 		0,05–0,20

System LX

		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
-M2 ▲ stable geometry ▲ medium feed rates ▲ universal application ▲ good chip control		**CTCP325** CTCP335 **CTCP325** **CTP1340** CTCP325 CTP1340	**CTCP335/CTP1340** **CTP1340** **CTCP325** **CTP1340** CTP1340	**CTCP335** CTP1340 **CTCP335** CTP1340 		0,20–0,50
-M3 – Radius ▲ stable geometry ▲ medium-high feed rates ▲ high surface quality ▲ Radius grooving/copy turning		**CTCP325** CTCP335 **CTCP325** **CTP1340** CTCP325 CTP1340	**CTCP335/CTP1340** **CTP1340** **CTCP325/CTCP335** **CTP1340** CTP1340	**CTCP335** CTP1340 **CTCP335** CTP1340 		0,15–0,35

Chip breakers / Applications

System SX

		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
-F2 ▲ very positive geometry ▲ honed cutting edge ▲ low feed rates ▲ low cutting forces ▲ first choice for stainless materials		**CTCP325** **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	**CTCP325/CTP1340** **CTP1340/CTPP345** **CTCP325/CTP1340** **CTP1340** CTP1340	**CTPP345** **CTPP345** **CTP1340** CTPP345 		0,05–0,15
-M1 ▲ very stable cutting edge ▲ medium-high feed rates ▲ for intterrupted cut ▲ for high tensile materials ▲ first choice for parting off		CTCP325 **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	CTCP335/CTP1340 **CTP1340** **CTCP325/CTP1340** **CTP1340** CTP1340	CTPP345 **CTPP345** CTP1340 CTPP345 		0,10–0,20
-M2 ▲ stable geometry ▲ medium feed rates ▲ universal application ▲ good chip control		CTCP325 **CTP1340** **CTCP325** **CTP1340** CTCP325 CTP1340	CTCP335/CTP1340 **CTP1340** **CTCP325/CTP1340** **CTP1340** CTP1340	CTPP345 **CTPP345** CTP1340 CTPP345 		0,075–0,20
-27P ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals		 **H216T** **H216T** H216T H216T	 **H216T** **H216T** H216T 	 **H216T** **H216T** 		0,05–0,25
-M3 – Radius ▲ stable geometry ▲ medium-high feed rates ▲ high surface quality ▲ Radius grooving / Copy turning		**CTCP335** **CTP1340** **CTCP335** **CTP1340** CTP1340	**CTCP335/CTP1340** **CTP1340** **CTCP335/CTP1340** **CTP1340** CTP1340	**CTP1340** **CTP1340** **CTP1340** CTP1340 		0,05–0,20
-M7 ▲ Grooving & parting off ▲ First choice for steel ▲ Medium - high feed rates ▲ Good chip control ▲ Positive geometry		**CTP1340** **CTP1340** **CTP1340** CTP1340 **CTP1340** CTP1340	**CTP1340** **CTP1340** **CTP1340** CTP1340 CTP1340 CTP1340	 		0,10–0,20
-M8 ▲ Grooving & parting off ▲ Ground cutting edge ▲ Good chip control ▲ First choice for stainless steel ▲ Low feeds		**CTP1340** **CTP1340** **CTP1340** CTP1340 **CTP1340** CTP1340	**CTP1340** **CTP1340** **CTP1340** CTP1340 CTP1340 CTP1340	 		0,03–0,15

11

Example of Coding Grooving Tools

Grooving insert

GX	16	2	E	3.00	N	0.50
Grooving system (GX)	Insert length (16 mm)	Width class of the holder / module or support surface (2 mm)	Type of insert, application	Groove width (3.0 mm)	Insert seat N = Neutral L = Left R = Right	Corner radius size (0.5 mm)

Module

E	25	R	12	GX	16	2
Application E = External I = Internal	Size (25 mm)	Module version R = Right L = Left	Maximum groove depth (12 mm)	Grooving system (GX)	Insert size (16 mm)	Width class 2

Basic holder

E	25	R	00	2525	L
Application E = External I = Internal	Size (25 mm)	Holder version R = Right L = Left	Approach angle 0°	Shank type 25x25mm	Shank length L = (see ISO)

Monobloc tool holder

E	25	R	00	13	S3	2525	X	S	DC	GX16
Application E = External I = Internal	Size (25 mm)	Holder version R = Right L = Left	Approach angle 0°	Groove depth (13 mm)	Groove width (3.0 mm)	Shank type 25x25mm	Shank length X = (see ISO)	Insert clamping S = Key	Cooling system DC = DirectCooling	Grooving system/width (3 mm)

Summary

Grooving insert

GX 16-2 E3.00 N 0.50



Module

E25 R 12- GX 16-2

Basic holder

E25 R 00 - 2525L



Monobloc tool holder

E25 R 0013S3-2525X-S-DC-GX16

Grade description

CTCP325



ISO | **P25** | M20 | **K30** | S25

Specifications:
Composition: Co 7.0%; mixed carbide 8.1%; WC balance | grain size: 1-2 µm | Hardness: HV_{30} 1470 |
Layer system: CVD TiCN-Al_2O_3 Multilayer

Recommended use:
The wear-resistant solution for steel and cast iron materials at high cutting speeds

CTCP335



ISO | **P35** | M30 | **K35**

Specifications:
Composition: Co 10.5%; mixed carbide 1.9%; WC balance | grain size: 1 µm | Hardness: HV_{30} 1370 |
Layer system: CVD TiCN-Al_2O_3 Multilayer

Recommended use:
The reliable choice for machining steel and cast iron materials.

CTP1340



ISO | **P30** | **M35** | **K30** | N30 | **S30** | O30

Specifications:
Composition: Co 9.0%; mixed carbide 0.75%; WC balance | grain size: 0.7–1 µm | Hardness: HV_{30} 1590 | Layer system: PVD TiAlTaN

Recommended use:
The universal high-performance grade for steels, austenitic steel, cast iron materials and heat-resistant alloys

CTPP345



ISO | **P45** | **M40** | S40

Specifications:
Composition: Co 12.5%; mixed carbide 2.0%; WC balance | grain size: 1-1.5 µm | Hardness: HV_{30} 1350 | Layer system: PVD TiAlTaN

Recommended use:
The reliable solution for steel and austenitic steels in unstable conditions.

H216T



ISO | **K15** | **N15** | S15 | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1630

Recommended application:
The uncoated carbide grade for the machining of aluminium and other non-ferrous metals

CWX500



ISO | **P30** | **M30** | **K35** | **N35** | **S15** | H05 | **O10**

Specification:
Composition: Co 10.0%; Others 0.7 %, WC balance | Grain size: 1 µm | Hardness: HV_{30} 1660

Recommended application:
The universal carbide grade for almost all materials

Application

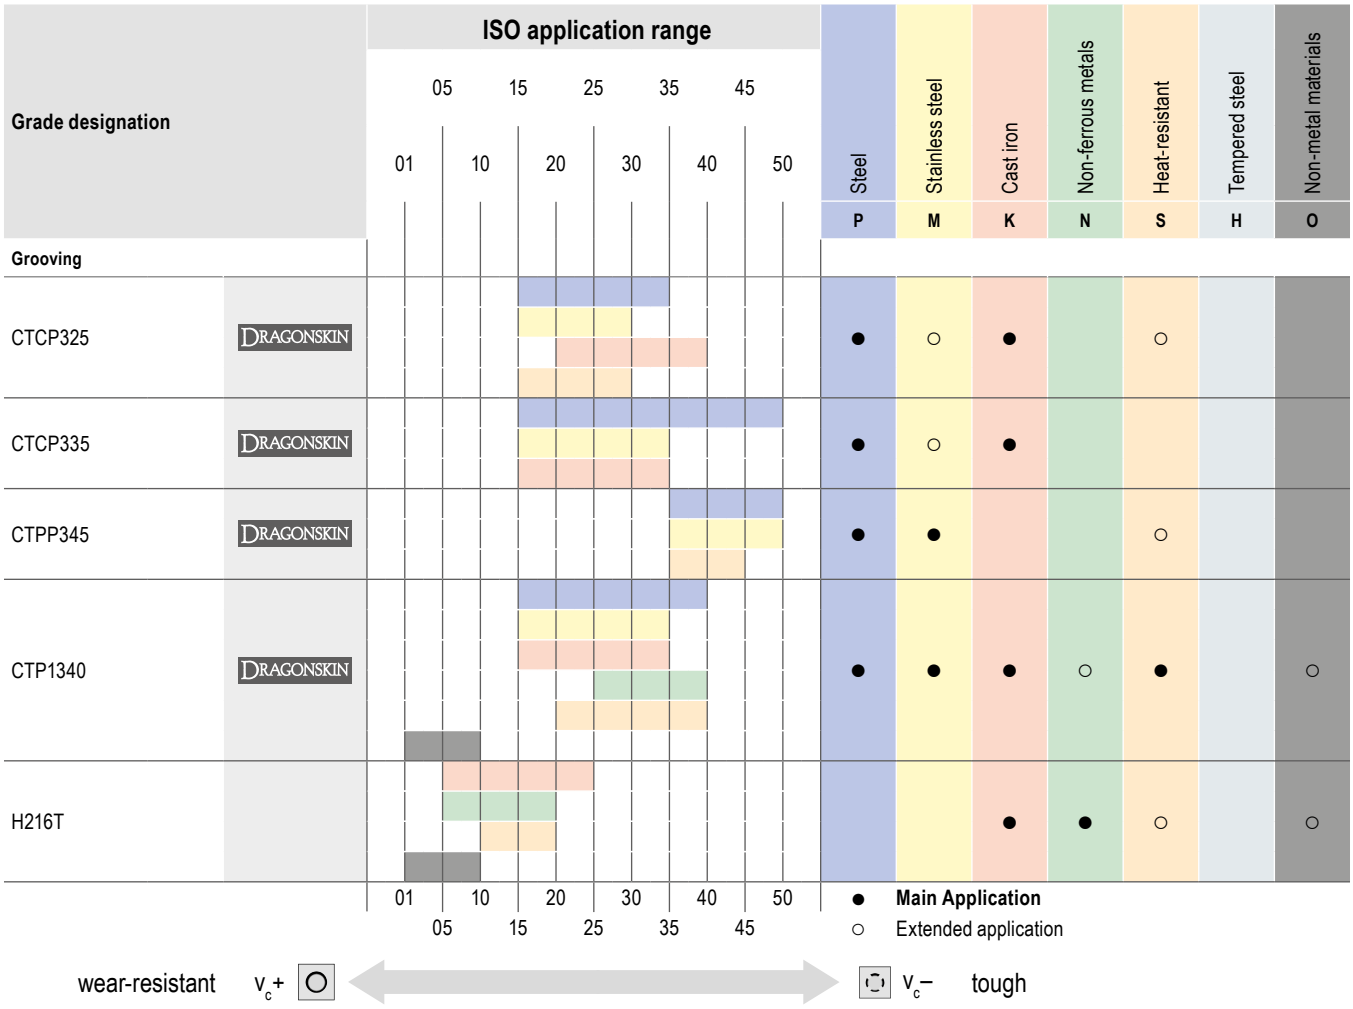

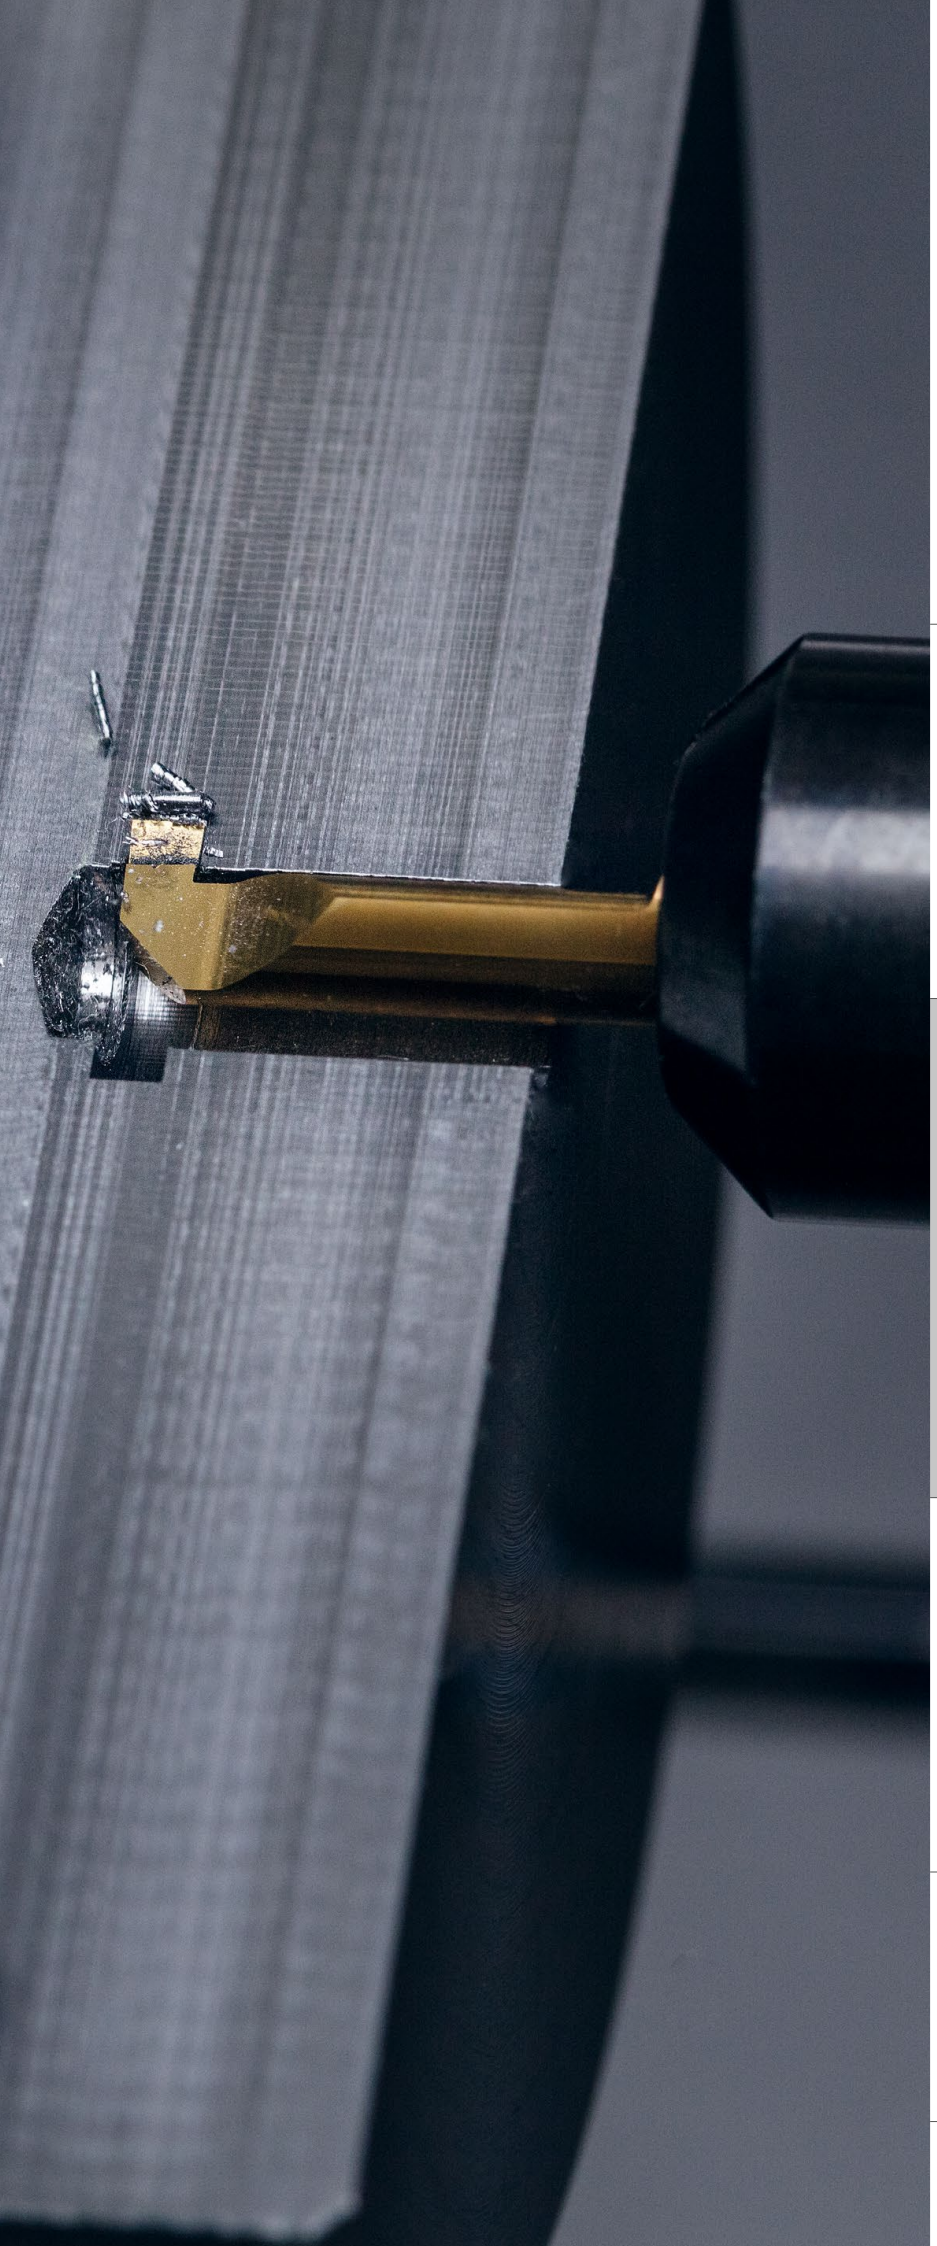

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools **12**

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

System overview	5
Toolfinder	4+5
Product programme	
UltraMini	6–34
MiniCut	35–53
UltraMini + MiniCut Hard Turning	10+36
SlotCut – Broaching	54–57
Technical Information	
Cutting Data	58–61
Broaching – Recommendations for Correct Use	62
Symbol explanation, coatings and thread types	63

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Toolfinder

EcoCut Mini

From Ø 2 mm

Inserts and tool holders can be found in
→ **Chapter 10 Multifunctional Tools – EcoCut and FreeTurn**

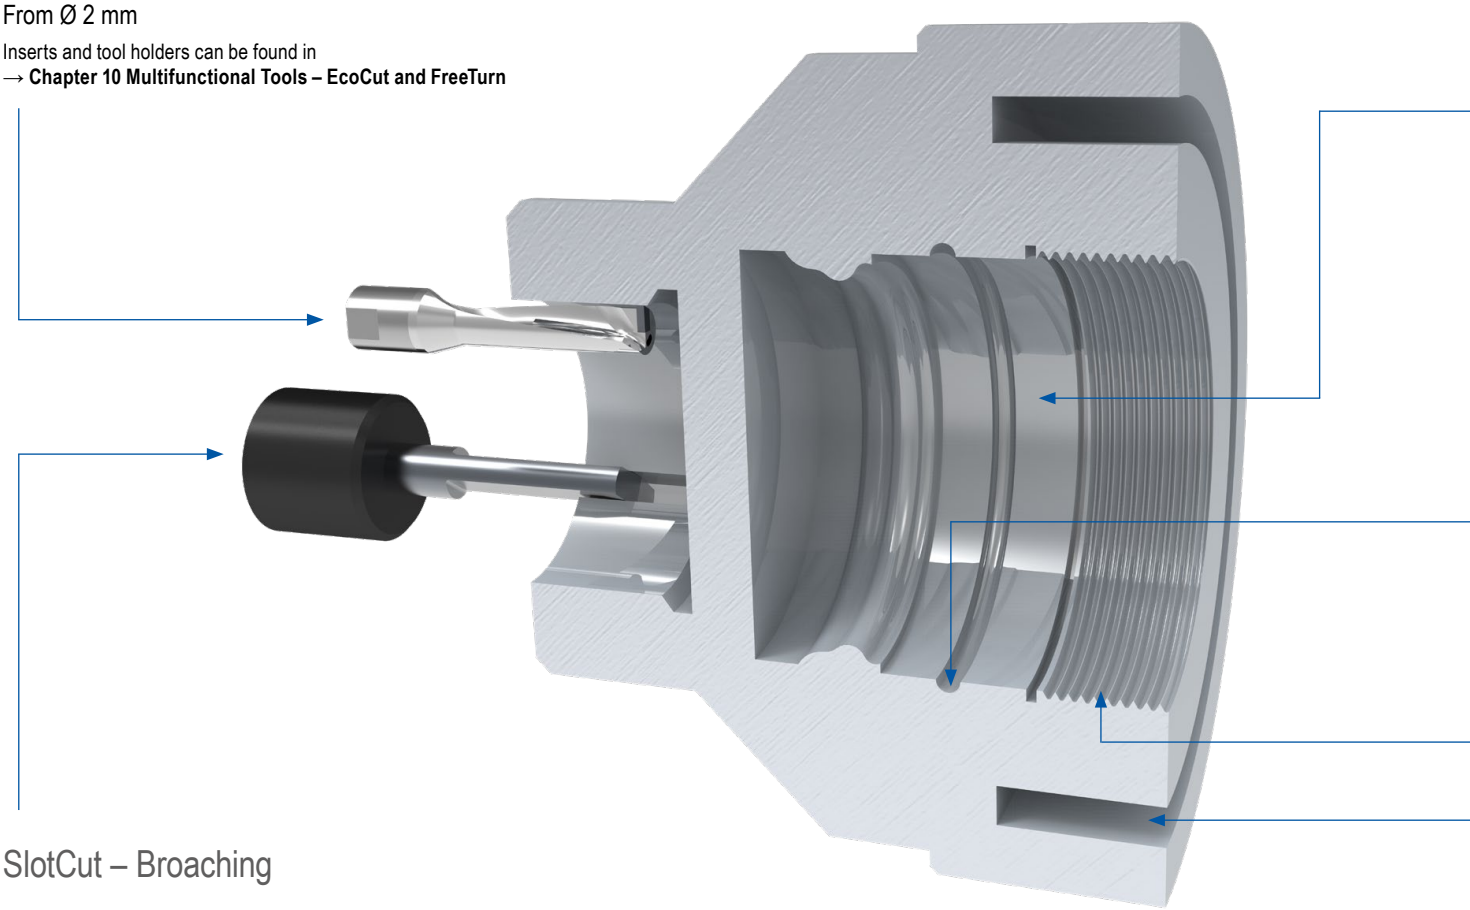

SlotCut – Broaching

Inserts + Holder DIN138 54–57

Symbol explanation

Internal machining

Internal grooving

Internal thread turning

Axial machining

System overview

UltraMini

- ▲ from Ø 0.5 mm
- ▲ flexible system
- ▲ ground inserts
- ▲ high repeatability
- ▲ coolant supply to the cutting edge

MiniCut

- ▲ from Ø 7.8 mm
- ▲ stable three-rib interface
- ▲ easy handling
- ▲ coolant supply to the cutting edge
- ▲ precise cutting edge position

SlotCut

- ▲ broaching directly on the machine
- ▲ usable from Ø 6 mm
- ▲ low machine load
- ▲ variety of tolerance classes

		UltraMini									MiniCut				
Hole diameter (mm)		**≥ 0,5**	**≥ 2**	**≥ 2,4**	**≥ 2,8**	**≥ 3**	**≥ 4**	**≥ 5**	**≥ 6**	**≥ 8**	**≥ 16**	**≥ 8**	**≥ 9**	**≥ 11**	**≥ 14**	**≥ 16**
Internal turning and profiling		6–9	6–9	6–9	6–9		6–9	6–9	6–9			35	35	35	35	35
Internal turning and profiling – hard turning			10		10		10	10	10			36		36	36	36
High-feed turning			11			11	11	11	11							
Internal turning					12		12	12				37	37	37	37	37
Back boring						13	13	13	13			38	38	38	38	
Turning and chamfering								14	14			38	38	38	38	
Pre-parting and chamfering							14	14	14			39	39	39	39	39
Internal Undercuts			18		18		18	18	18			42	42	42	42	42
Groove turning			15–17			15–17	15–17	15–17	15–17			40+41	40+41	40+41	40+41	40+41
Groove and profile turning							19	19	19			43	43	43	43	43
Internal thread turning				20–22			20–22	20–22	20–22			44–47	44–47	44–47	44–47	44–47
Axial grooving								23–28	23–28	23–28	23–28	48+49	48+49	48+49	48+49	48+49
suitable holder		31–34										50–53				
Sets		29+30														

12

UltraMini – Inserts for internal turning and profiling

▲ CDX = Maximum depth of cut when turning outwards





Illustrations show right-hand versions

TiN	TiN	TiAlN	TiAlN
Left-hand	Right-hand	Left-hand	Right-hand
73 005 ...	**73 004 ...**	**73 005 ...**	**73 004 ...**

ISO designation	DCONMS $_{h6}$	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	EUR Y5		EUR Y5		EUR Y5		EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm								
R/L 050.05-2	4		0,5	0,4	20	2	0,03	0,32	0,02	39,21	**500**	39,21	**500**				
R/L 050.06-2	4		0,6	0,5	20	2	0,05	0,40	0,04	39,21	**510**	39,21	**510**				
R/L 050.06-3	4		0,6	0,5	20	3	0,05	0,40	0,04	40,37	**511**	40,37	**511**				
R/L 050.08-4	4		0,8	0,7	20	4	0,05	0,60	0,04					40,78	**812**	40,78	**812**
R/L 050.1-8	4		1,0	0,9	22	8	0,10	0,75	0,05					40,37	**813**	40,37	**813**
R/L 050.15-5	4		1,5	1,3	19	5	0,10	1,15	0,05	37,37	**515**	37,37	**515**				
R/L 050.15-10	4		1,5	1,3	24	10	0,10	1,15	0,05	38,22	**516**	38,22	**516**				
R/L 050.15-12	4		1,5	1,3	26	12	0,10	1,15	0,05					40,37	**818**	40,37	**818**
R/L 050.2-5	4		2,0	1,7	19	5	0,10	1,50	0,05	33,95	**520**	33,95	**520**				
R/L 050.2-10	4		2,0	1,7	24	10	0,10	1,50	0,05	34,65	**521**	34,65	**521**				
R/L 050.2-15	4		2,0	1,7	29	15	0,10	1,50	0,05	36,65	**522**	36,65	**522**				
R/L 050.3-10	4	0,6	2,8	2,6	24	10	0,20	2,30	0,10	36,53	**531**	36,53	**531**				
R/L 050.3-16	4	0,6	2,8	2,6	30	16	0,20	2,30	0,10	37,09	**530**	37,09	**530**				
R/L 050.3-20	4	0,6	2,8	2,6	34	20	0,20	2,30	0,10	39,08	**532**	39,08	**532**				
R/L 050.35-10	4	1,1	3,5	3,1	24	10	0,25	2,80	0,10					31,97	**835**	31,97	**835**
R/L 050.35-16	4	1,1	3,5	3,1	30	16	0,25	2,80	0,10					33,68	**836**	33,68	**836**
R/L 050.35-20	4	1,1	3,5	3,1	34	20	0,25	2,80	0,10					40,49	**837**	40,49	**837**
R/L 050.35-24	4	1,1	3,5	3,1	38	24	0,25	2,80	0,10					44,32	**838**	44,32	**838**
R/L 050.4-10	4	1,5	4,0	3,5	24	10	0,30	3,00	0,10	36,81	**541**	36,81	**541**	36,81	**841**	36,81	**841**
R/L 050.4-16	4	1,5	4,0	3,5	30	16	0,30	3,00	0,10	37,37	**540**	37,37	**540**	37,37	**840**	37,37	**840**
R/L 050.4-20	4	1,5	4,0	3,5	34	20	0,30	3,00	0,10	39,21	**542**	39,21	**542**	39,21	**842**	39,21	**842**
R/L 050.4-24	4	1,5	4,0	3,5	38	24	0,30	3,00	0,10	42,50	**545**	42,50	**545**	42,50	**845**	42,50	**845**
R/L 050.4-28	4	1,5	4,0	3,5	42	28	0,30	3,00	0,10	47,32	**546**	47,32	**546**	47,32	**846**	47,32	**846**
R/L 050.5-10	5	1,9	5,0	4,4	25	10	0,50	3,80	0,15	34,53	**551**	34,53	**551**	34,53	**851**	34,53	**851**
R/L 050.5-15	5	1,9	5,0	4,4	30	15	0,50	3,80	0,15	37,52	**552**	37,52	**552**	37,52	**852**	37,52	**852**
R/L 050.5-20	5	1,9	5,0	4,4	35	20	0,50	3,80	0,15	38,50	**550**	38,50	**550**	38,50	**850**	38,50	**850**
R/L 050.5-25	5	1,9	5,0	4,4	40	25	0,50	3,80	0,15	43,61	**553**	43,61	**553**	43,61	**853**	43,61	**853**
R/L 050.5-30	5	1,9	5,0	4,4	45	30	0,50	3,80	0,15	47,32	**554**	47,32	**554**	47,32	**854**	47,32	**854**
R/L 050.5-35	5	1,9	5,0	4,4	50	35	0,50	3,80	0,15	51,58	**556**	51,58	**556**	51,58	**856**	51,58	**856**
R/L 050.5-40	5	1,9	5,0	4,4	55	40	0,50	3,80	0,15					57,97	**857**	57,97	**857**
R/L 050.6-15	6	2,3	6,0	5,3	30	15	0,50	4,50	0,15	37,95	**561**	37,95	**561**	37,95	**861**	37,95	**861**
R/L 050.6-22	6	2,3	6,0	5,3	37	22	0,50	4,50	0,15	39,50	**560**	39,50	**560**	39,50	**860**	39,50	**860**
R/L 050.6-25	6	2,3	6,0	5,3	40	25	0,50	4,50	0,15	43,79	**562**	43,79	**562**	43,79	**862**	43,79	**862**
R/L 050.6-30	6	2,3	6,0	5,3	45	30	0,50	4,50	0,15	48,02	**563**	48,02	**563**	48,02	**863**	48,02	**863**
R/L 050.6-35	6	2,3	6,0	5,3	50	35	0,50	4,50	0,15	51,58	**564**	51,58	**564**	51,58	**864**	51,58	**864**
R/L 050.6-42	6	2,3	6,0	5,3	57	42	0,50	4,50	0,15	57,56	**565**	57,56	**565**	57,56	**865**	57,56	**865**
R/L 050.7-20	7	2,8	6,8	6,3	35	20	0,60	5,50	0,15	39,66	**572**	39,66	**572**	39,66	**872**	39,66	**872**
R/L 050.7-25	7	2,8	6,8	6,3	40	25	0,60	5,50	0,15	49,74	**573**	49,74	**573**	49,74	**873**	49,74	**873**
R/L 050.7-30	7	2,8	6,8	6,3	45	30	0,60	5,50	0,15	50,58	**574**	50,58	**574**	50,58	**874**	50,58	**874**
R/L 050.7-35	7	2,8	7,0	6,3	50	35	0,60	5,50	0,15	52,41	**575**	52,41	**575**	52,41	**875**	52,41	**875**
R/L 050.7-40	7	2,8	7,0	6,3	55	40	0,60	5,50	0,15	58,27	**576**	58,27	**576**	58,27	**876**	58,27	**876**
R/L 050.7-45	7	2,8	7,0	6,3	60	45	0,60	5,50	0,15	61,81	**577**	61,81	**577**	61,81	**877**	61,81	**877**
R/L 050.7-50	7	2,8	7,0	6,3	65	50	0,60	5,50	0,15	66,63	**578**	66,63	**578**	66,63	**878**	66,63	**878**

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	●	●	●	●
S	○	○	●	●
H	○	○	●	●
O	●	●	●	●

→ v_c Page 59

UltraMini – Inserts for internal turning and profiling

▲ CDX = Maximum depth of cut when turning outwards





K10F

Left-hand

K10F

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	73 005 ... EUR Y5		73 004 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 050.2-5	4		2,0	1,7	19	5	0,1	1,5	0,05	28,00	**020**	28,00	**020**
R/L 050.2-10	4		2,0	1,7	24	10	0,1	1,5	0,05	28,71	**021**	28,71	**021**
R/L 050.2-15	4		2,0	1,7	29	15	0,1	1,5	0,05	30,83	**022**	30,83	**022**
R/L 050.3-10	4	0,6	2,8	2,6	24	10	0,2	2,3	0,10	28,28	**031**	28,28	**031**
R/L 050.3-16	4	0,6	2,8	2,6	30	16	0,2	2,3	0,10	30,70	**030**	30,70	**030**
R/L 050.3-20	4	0,6	2,8	2,6	34	20	0,2	2,3	0,10	33,68	**032**	33,68	**032**
R/L 050.4-10	4	1,5	4,0	3,5	24	10	0,3	3,0	0,10	28,55	**041**	28,55	**041**
R/L 050.4-16	4	1,5	4,0	3,5	30	16	0,3	3,0	0,10	30,83	**040**	30,83	**040**
R/L 050.4-20	4	1,5	4,0	3,5	34	20	0,3	3,0	0,10	32,25	**042**	32,25	**042**
R/L 050.5-10	5	1,9	5,0	4,4	25	10	0,5	3,8	0,15	28,71	**051**	28,71	**051**
R/L 050.5-15	5	1,9	5,0	4,4	30	15	0,5	3,8	0,15	31,14	**052**	31,14	**052**
R/L 050.5-20	5	1,9	5,0	4,4	35	20	0,5	3,8	0,15	32,54	**050**	32,54	**050**
R/L 050.5-25	5	1,9	5,0	4,4	40	25	0,5	3,8	0,15	37,81	**053**	37,81	**053**
R 050.5-30	5	1,9	5,0	4,4	45	30	0,5	3,8	0,05			40,21	**054**
L 050.5-30	5	1,9	5,0	4,4	45	30	0,5	3,8	0,15	40,21	**054**		
R/L 050.6-15	6	2,3	6,0	5,3	30	15	0,5	4,5	0,15	31,26	**061**	31,26	**061**
R/L 050.6-22	6	2,3	6,0	5,3	37	22	0,5	4,5	0,15	33,24	**060**	33,24	**060**
R/L 050.6-25	6	2,3	6,0	5,3	40	25	0,5	4,5	0,15	38,35	**062**	38,35	**062**
R/L 050.6-30	6	2,3	6,0	5,3	45	30	0,5	4,5	0,15	41,34	**063**	41,34	**063**
R/L 050.7-20	7	2,8	6,8	6,3	35	20	0,6	5,5	0,15	33,40	**072**	33,40	**072**
R/L 050.7-25	7	2,8	6,8	6,3	40	25	0,6	5,5	0,15	39,08	**073**	39,08	**073**
R/L 050.7-30	7	2,8	6,8	6,3	45	30	0,6	5,5	0,15	44,62	**074**	44,62	**074**

P		
M		
K		
N	○	○
S		
H		
O	●	●

12

→ v_c Page 59

UltraMini – Inserts for internal turning and profiling

▲ with corner radius ≤ 0.05 mm
▲ CDX = Maximum depth of cut when turning outwards







Illustrations show right-hand versions

										Left-hand		Right-hand		Left-hand		Right-hand	
										73 021 ...		**73 020 ...**		**73 023 ...**		**73 022 ...**	
ISO designation	DCONMS $_{h6}$	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	**EUR**		**EUR**		**EUR**		**EUR**	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	Y5		Y5		Y5		Y5	
R/L 053.3-10	4	0,6	2,8	2,6	24	10	0,2	2,3	0,03	38,93	**310**	38,93	**310**				
R/L 053.3-16	4	0,6	2,8	2,6	30	16	0,2	2,3	0,03	40,93	**316**	40,93	**316**				
R/L 053.3-20	4	0,6	2,8	2,6	34	20	0,2	2,3	0,03	48,33	**320**	48,33	**320**				
R/L 053.4-10	4	1,5	4,0	3,5	24	10	0,3	3,0	0,03	38,93	**410**	38,93	**410**				
R/L 053.4-16	4	1,5	4,0	3,5	30	16	0,3	3,0	0,03	40,93	**416**	40,93	**416**				
R/L 053.4-20	4	1,5	4,0	3,5	34	20	0,3	3,0	0,03	46,19	**420**	46,19	**420**				
R/L 053.4-24	4	1,5	4,0	3,5	38	24	0,3	3,0	0,03	51,15	**424**	51,15	**424**				
R/L 053.4-28	4	1,5	4,0	3,5	42	28	0,3	3,0	0,03	56,56	**428**	56,56	**428**				
R/L 055.2-10	4		2,0	1,7	24	10	0,1	1,5	0,05					39,93	**210**	39,93	**210**
R/L 055.2-15	4		2,0	1,7	29	15	0,1	1,5	0,05					41,79	**215**	41,79	**215**
R/L 055.2-5	4		2,0	1,7	19	5	0,1	1,5	0,05					39,08	**205**	39,08	**205**
R/L 055.3-10	4	0,6	2,8	2,6	24	10	0,2	2,3	0,05					38,93	**310**	38,93	**310**
R/L 055.3-16	4	0,6	2,8	2,6	30	16	0,2	2,3	0,05					40,93	**316**	40,93	**316**
R/L 055.3-20	4	0,6	2,8	2,6	34	20	0,2	2,3	0,05					48,33	**320**	48,33	**320**
R/L 055.4-10	4	1,5	4,0	3,5	24	10	0,3	3,0	0,05					38,93	**410**	38,93	**410**
R/L 055.4-16	4	1,5	4,0	3,5	30	16	0,3	3,0	0,05					40,93	**416**	40,93	**416**
R/L 055.4-20	4	1,5	4,0	3,5	34	20	0,3	3,0	0,05					46,19	**420**	46,19	**420**
R/L 055.4-24	4	1,5	4,0	3,5	38	24	0,3	3,0	0,05					51,15	**424**	51,15	**424**
R/L 055.4-28	4	1,5	4,0	3,5	42	28	0,3	3,0	0,05					56,56	**428**	56,56	**428**
R/L 055.5-10	5	1,9	5,0	4,4	25	10	0,5	3,8	0,05					36,53	**510**	36,53	**510**
R/L 055.5-15	5	1,9	5,0	4,4	30	15	0,5	3,8	0,05					38,93	**515**	38,93	**515**
R/L 055.5-20	5	1,9	5,0	4,4	35	20	0,5	3,8	0,05					44,20	**520**	44,20	**520**
R/L 055.5-25	5	1,9	5,0	4,4	40	25	0,5	3,8	0,05					49,74	**525**	49,74	**525**
R/L 055.5-30	5	1,9	5,0	4,4	45	30	0,5	3,8	0,05					55,70	**530**	55,70	**530**
R/L 055.5-35	5	1,9	5,0	4,4	50	35	0,5	3,8	0,05					61,39	**535**	61,39	**535**
R/L 055.6-15	6	2,3	6,0	5,3	30	15	0,5	4,5	0,05					38,93	**615**	38,93	**615**
R/L 055.6-22	6	2,3	6,0	5,3	37	22	0,5	4,5	0,05					44,20	**622**	44,20	**622**
R/L 055.6-25	6	2,3	6,0	5,3	40	25	0,5	4,5	0,05					49,74	**625**	49,74	**625**
R/L 055.6-30	6	2,3	6,0	5,3	45	30	0,5	4,5	0,05					55,70	**630**	55,70	**630**
R/L 055.6-35	6	2,3	6,0	5,3	50	35	0,5	4,5	0,05					61,39	**635**	61,39	**635**
R/L 055.6-42	6	2,3	6,0	5,3	57	42	0,5	4,5	0,05					68,21	**642**	68,21	**642**

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	●	●	●	●
S	●	●	●	●
H	●	●	●	●
O	●	●	●	●

→ v_c Page 59

UltraMini – Inserts for internal turning and profiling

▲ with chip former
▲ CDX = Maximum depth of cut when turning outwards





Illustrations show right-hand versions

TiAlN

Left-hand

TiAlN

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	73 017 ... EUR	Y5	73 016 ... EUR	Y5
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 050.4-10C	4	1,5	4	3,5	24	10	0,3	3,0	0,2	31,69	**410**	31,69	**410**
R/L 050.4-16C	4	1,5	4	3,5	30	16	0,3	3,0	0,2	33,24	**416**	33,24	**416**
R/L 050.4-20C	4	1,5	4	3,5	34	20	0,3	3,0	0,2	38,09	**420**	38,09	**420**
R/L 050.4-24C	4	1,5	4	3,5	38	24	0,3	3,0	0,2	42,50	**424**	42,50	**424**
R/L 050.4-28C	4	1,5	4	3,5	42	28	0,3	3,0	0,2	47,32	**428**	47,32	**428**
R/L 050.5-10C	5	1,9	5	4,4	25	10	0,5	3,8	0,2	29,71	**510**	29,71	**510**
R/L 050.5-15C	5	1,9	5	4,4	30	15	0,5	3,8	0,2	31,69	**515**	31,69	**515**
R/L 050.5-20C	5	1,9	5	4,4	35	20	0,5	3,8	0,2	36,38	**520**	36,38	**520**
R/L 050.5-25C	5	1,9	5	4,4	40	25	0,5	3,8	0,2	41,20	**525**	41,20	**525**
R/L 050.5-30C	5	1,9	5	4,4	45	30	0,5	3,8	0,2	46,46	**530**	46,46	**530**
R/L 050.5-35C	5	1,9	5	4,4	50	35	0,5	3,8	0,2	51,58	**535**	51,58	**535**
R/L 050.6-15C	6	2,3	6	5,3	30	15	0,5	4,5	0,2	31,69	**615**	31,69	**615**
R/L 050.6-22C	6	2,3	6	5,3	37	22	0,5	4,5	0,2	36,38	**622**	36,38	**622**
R/L 050.6-25C	6	2,3	6	5,3	40	25	0,5	4,5	0,2	41,20	**625**	41,20	**625**
R/L 050.6-30C	6	2,3	6	5,3	45	30	0,5	4,5	0,2	46,46	**630**	46,46	**630**
R/L 050.6-35C	6	2,3	6	5,3	50	35	0,5	4,5	0,2	51,58	**635**	51,58	**635**
R/L 050.6-42C	6	2,3	6	5,3	57	42	0,5	4,5	0,2	57,56	**642**	57,56	**642**
R/L 050.7-20C	7	2,8	7	6,3	35	20	0,6	5,5	0,2	36,65	**720**	36,65	**720**
R/L 050.7-25C	7	2,8	7	6,3	40	25	0,6	5,5	0,2	41,63	**725**	41,63	**725**
R/L 050.7-30C	7	2,8	7	6,3	45	30	0,6	5,5	0,2	47,02	**730**	47,02	**730**
R/L 050.7-35C	7	2,8	7	6,3	50	35	0,6	5,5	0,2	52,41	**735**	52,41	**735**
R/L 050.7-40C	7	2,8	7	6,3	55	40	0,6	5,5	0,2	58,27	**740**	58,27	**740**
R/L 050.7-45C	7	2,8	7	6,3	60	45	0,6	5,5	0,2	61,81	**745**	61,81	**745**
R/L 050.7-50C	7	2,8	7	6,3	65	50	0,6	5,5	0,2	66,63	**750**	66,63	**750**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

12

→ v_c Page 59

UltraMini – Inserts for internal turning and profiling – hard turning

▲ 46 to 65 HRC
▲ CDX = Maximum depth of cut when turning outwards





Illustrations show right-hand versions

TiAlN+

Left-hand

TiAlN+

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	73 025 ... EUR		73 024 ... EUR	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	Y5		Y5	
R/L 050.2-5	4		2,0	1,7	19	5	0,1	1,5	0,05	47,32	920	47,32	920
R/L 050.2-10	4		2,0	1,7	24	10	0,1	1,5	0,05	48,16	921	48,16	921
R/L 050.2-15	4		2,0	1,7	29	15	0,1	1,5	0,05	50,02	922	50,02	922
R/L 050.3-10	4	0,6	2,8	2,6	24	10	0,2	2,3	0,10	47,17	931	47,17	931
R/L 050.3-16	4	0,6	2,8	2,6	30	16	0,2	2,3	0,10	49,17	930	49,17	930
R/L 050.3-20	4	0,6	2,8	2,6	34	20	0,2	2,3	0,10	56,25	932	56,25	932
R/L 050.4-10	4	1,5	4,0	3,5	24	10	0,3	3,0	0,10	47,17	941	47,17	941
R/L 050.4-16	4	1,5	4,0	3,5	30	16	0,3	3,0	0,10	49,17	940	49,17	940
R/L 050.4-20	4	1,5	4,0	3,5	34	20	0,3	3,0	0,10	54,13	942	54,13	942
R/L 050.4-24	4	1,5	4,0	3,5	38	24	0,3	3,0	0,10	58,84	945	58,84	945
R/L 050.4-28	4	1,5	4,0	3,5	42	28	0,3	3,0	0,10	63,94	946	63,94	946
R/L 050.5-10	5	1,9	5,0	4,4	25	10	0,5	3,8	0,15	45,73	951	45,73	951
R/L 050.5-15	5	1,9	5,0	4,4	30	15	0,5	3,8	0,15	47,90	952	47,90	952
R/L 050.5-20	5	1,9	5,0	4,4	35	20	0,5	3,8	0,15	53,00	950	53,00	950
R/L 050.5-25	5	1,9	5,0	4,4	40	25	0,5	3,8	0,15	58,27	953	58,27	953
R/L 050.5-30	5	1,9	5,0	4,4	45	30	0,5	3,8	0,15	63,79	954	63,79	954
R/L 050.5-35	5	1,9	5,0	4,4	50	35	0,5	3,8	0,15	69,21	956	69,21	956
R/L 050.6-15	6	2,3	6,0	5,3	30	15	0,5	4,5	0,15	48,59	961	48,59	961
R/L 050.6-22	6	2,3	6,0	5,3	37	22	0,5	4,5	0,15	53,70	960	53,70	960
R/L 050.6-25	6	2,3	6,0	5,3	40	25	0,5	4,5	0,15	58,98	962	58,98	962
R/L 050.6-30	6	2,3	6,0	5,3	45	30	0,5	4,5	0,15	64,50	963	64,50	963
R/L 050.6-35	6	2,3	6,0	5,3	50	35	0,5	4,5	0,15	70,06	964	70,06	964
R/L 050.6-42	6	2,3	6,0	5,3	57	42	0,5	4,5	0,15	76,31	965	76,31	965
R/L 050.7-20	7	2,8	6,8	6,3	35	20	0,6	5,5	0,15	54,29	972	54,29	972
R/L 050.7-25	7	2,8	6,8	6,3	40	25	0,6	5,5	0,15	59,82	973	59,82	973
R/L 050.7-30	7	2,8	6,8	6,3	45	30	0,6	5,5	0,15	65,65	974	65,65	974
R/L 050.7-35	7	2,8	6,8	6,3	50	35	0,6	5,5	0,15	71,18	975	71,18	975
R/L 050.7-40	7	2,8	6,8	6,3	55	40	0,6	5,5	0,15	77,73	976	77,73	976
R/L 050.7-45	7	2,8	6,8	6,3	60	45	0,6	5,5	0,15	81,43	977	81,43	977
R/L 050.7-50	7	2,8	6,8	6,3	65	50	0,6	5,5	0,15	86,54	978	86,54	978
P										○		○	
M										○		○	
K										○		○	
N										○		○	
S										○		○	
H										●		●	
O										○		○	

→ v_c Page 59

Machining with cooling is recommended.

UltraMini – Inserts for internal turning

▲ with chip former
▲ High-feed internal turning
▲ CDX = Maximum depth of cut when turning outwards





Illustrations show right-hand versions

DPX77S
DRAGONSKIN

Left-hand

DPX77S
DRAGONSKIN

Right-hand

ISO designation	DCONMS $_{h6}$	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	73 001 ...		73 000 ...	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	EUR Y5		EUR Y5	
R/L X050.1-5	4		1,0	0,90	20	5	0,03	0,85	0,05	43,61	121	43,61	121
R/L X050.15-7	4		1,5	1,35	22	7	0,05	1,25	0,10	49,87	233	49,87	233
R/L X050.2-5	4		2,0	1,80	19	5	0,10	1,60	0,15	37,95	245	37,95	245
R/L X050.2-10	4		2,0	1,80	24	10	0,10	1,60	0,05	38,93	215	38,93	215
R/L X050.2-10	4		2,0	1,80	24	10	0,10	1,60	0,15	38,93	241	38,93	241
R/L X050.3-10	4	0,7	3,0	2,70	24	10	0,15	2,55	0,05	37,81	341	37,81	341
R/L X050.3-10	4	0,7	3,0	2,70	24	10	0,15	2,55	0,20	37,81	347	37,81	347
R/L X050.3-16	4	0,7	3,0	2,70	30	16	0,15	2,55	0,05	39,93	371	39,93	371
R/L X050.3-16	4	0,7	3,0	2,70	30	16	0,15	2,55	0,10	39,93	373	39,93	373
R/L X050.3-16	4	0,7	3,0	2,70	30	16	0,15	2,55	0,20	39,93	377	39,93	377
R/L X050.4-10	4	1,6	4,0	3,60	24	10	0,20	3,20	0,10	37,81	403	37,81	403
R/L X050.4-10	4	1,6	4,0	3,60	24	10	0,20	3,20	0,20	37,81	407	37,81	407
R/L X050.4-16	4	1,6	4,0	3,60	30	16	0,20	3,20	0,05	39,93	431	39,93	431
R/L X050.4-16	4	1,6	4,0	3,60	30	16	0,20	3,20	0,10	39,93	433	39,93	433
R/L X050.4-16	4	1,6	4,0	3,60	30	16	0,20	3,20	0,20	39,93	437	39,93	437
R/L X050.4-24	4	1,6	4,0	3,60	38	24	0,20	3,20	0,10	50,75	463	50,75	463
R/L X050.4-24	4	1,6	4,0	3,60	38	24	0,20	3,20	0,20	50,75	467	50,75	467
R/L X050.5-15	5	2,1	5,0	4,60	30	15	0,30	4,05	0,05	37,81	511	37,81	511
R/L X050.5-15	5	2,1	5,0	4,60	30	15	0,30	4,05	0,10	37,81	513	37,81	513
R/L X050.5-15	5	2,1	5,0	4,60	30	15	0,30	4,05	0,20	37,81	517	37,81	517
R/L X050.5-25	5	2,1	5,0	4,60	40	25	0,30	4,05	0,10	49,31	543	49,31	543
R/L X050.5-25	5	2,1	5,0	4,60	40	25	0,30	4,05	0,20	49,31	547	49,31	547
R/L X050.5-30	5	2,1	5,0	4,60	45	30	0,30	4,05	0,10	55,70	553	55,70	553
R/L X050.5-30	5	2,1	5,0	4,60	45	30	0,30	4,05	0,20	55,70	557	55,70	557
R/L X050.6-15	6	2,5	6,0	5,50	30	15	0,40	4,90	0,05	37,81	611	37,81	611
R/L X050.6-15	6	2,5	6,0	5,50	30	15	0,40	4,90	0,10	37,81	613	37,81	613
R/L X050.6-15	6	2,5	6,0	5,50	30	15	0,40	4,90	0,20	37,81	617	37,81	617
R/L X050.6-22	6	2,5	6,0	5,50	37	22	0,40	4,90	0,20	43,50	637	43,50	637
R/L X050.6-30	6	2,5	6,0	5,50	45	30	0,40	4,90	0,20	55,70	657	55,70	657
R/L X050.6-35	6	2,5	6,0	5,50	50	35	0,40	4,90	0,20	61,67	667	61,67	667
R/L X050.6-50	6	2,5	6,0	5,50	65	50	0,40	4,90	0,20	76,75	697	76,75	697
R/L X050.7-25	7	3,0	7,0	6,50	40	25	0,50	5,90	0,20	50,02	747	50,02	747
R/L X050.7-30	7	3,0	7,0	6,50	45	30	0,50	5,90	0,20	56,41	757	56,41	757

P	●	●
M	●	●
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c Page 60+61

12

UltraMini – Inserts for internal turning

▲ CDX = Maximum depth of cut when turning outwards



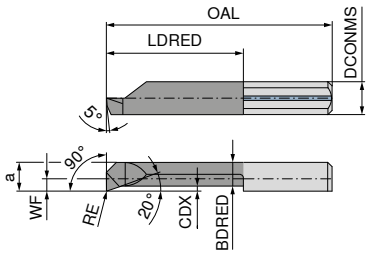

Illustrations show right-hand versions

TiN

Left-hand

TiN

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	RE	73 015 ... EUR Y5		73 014 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 090.3-10	4	0,6	2,8	2,6	24	10	0,2	2,3	0,2	33,68	**541**	33,68	**541**
R/L 090.3-16	4	0,6	2,8	2,6	30	16	0,2	2,3	0,2	35,66	**542**	35,66	**542**
R/L 090.4-10	4	1,5	4,0	3,5	24	10	0,3	3,0	0,2	33,68	**545**	33,68	**545**
R/L 090.4-16	4	1,5	4,0	3,5	30	16	0,3	3,0	0,2	35,66	**546**	35,66	**546**
R/L 090.5-10	5	1,9	5,0	4,4	25	10	0,5	3,8	0,2	33,68	**550**	33,68	**550**
R/L 090.5-15	5	1,9	5,0	4,4	30	15	0,5	3,8	0,2	35,66	**551**	35,66	**551**
R/L 090.5-20	5	1,9	5,0	4,4	35	20	0,5	3,8	0,2	38,93	**552**	38,93	**552**
P										●		●	
M										●		●	
K										●		●	
N										●		●	
S										○		○	
H										○		○	
O										●		●	

→ v_c Page 59

UltraMini – Inserts for back boring

▲ CDX = Maximum depth of cut when turning outwards



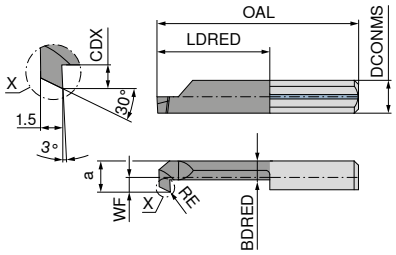

Illustrations show right-hand versions

TiN

Left-hand

TiN

Right-hand

ISO designation	DCONMS $_{h6}$ mm	WF mm	DMIN mm	a mm	OAL mm	LDRED mm	CDX mm	BDRED mm	RE mm	73 013 ... EUR Y5		73 012 ... EUR Y5	
R/L 080.0003-15	4	0,6	3	2,6	29	15	0,5	2,0	0,10	38,66	**542**	38,66	**542**
R/L 080.0003-20	4	0,6	3	2,6	34	20	0,5	2,0	0,10	46,04	**544**	46,04	**544**
R/L 080.0004-15	4	1,5	4	3,5	29	15	0,8	2,4	0,15	38,66	**546**	38,66	**546**
R/L 080.0004-25	4	1,5	4	3,5	39	25	0,8	2,4	0,15	44,20	**548**	44,20	**548**
R/L 080.0005-20	5	1,9	5	4,4	35	20	1,0	3,3	0,20	39,66	**554**	39,66	**554**
R/L 080.0005-30	5	1,9	5	4,4	45	30	1,0	3,3	0,20	41,08	**558**	41,08	**558**
R/L 080.0006-20	6	2,3	6	5,3	35	20	1,8	3,4	0,20	41,20	**564**	41,20	**564**
R/L 080.0006-30	6	2,3	6	5,3	45	30	1,8	3,4	0,20	49,46	**568**	49,46	**568**
R/L 080.0007-20	7	2,7	7	6,3	35	20	2,5	3,8	0,20	41,20	**574**	41,20	**574**
R/L 080.0007-30	7	2,7	7	6,3	45	30	2,5	3,8	0,20	49,46	**578**	49,46	**578**
P										●		●	
M										●		●	
K										●		●	
N										●		●	
S										○		○	
H										○		○	
O										●		●	

→ v_c Page 59

12

UltraMini – Inserts for internal turning and chamfering

▲ CDX = Maximum depth of cut when turning outwards

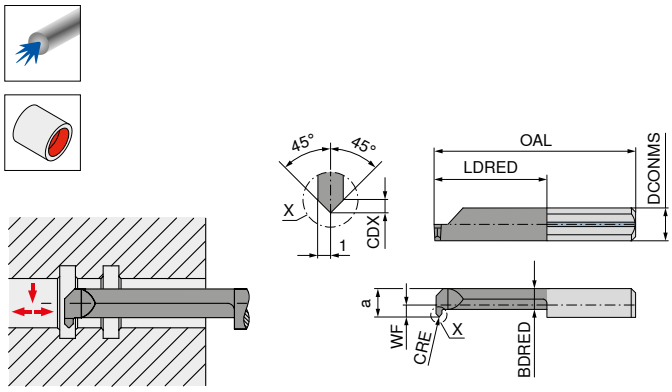

Illustrations show right-hand versions

TiN

TiN

Left-hand

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	CRE	73 007 ... EUR Y5		73 006 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 060.5-15	5	1,9	5,0	4,4	30	15	0,7	3,3	0,2	34,65	**551**	34,65	**551**
R/L 060.5-20	5	1,9	5,0	4,4	35	20	0,7	3,3	0,2	36,65	**550**	36,65	**550**
R/L 060.7-20	7	2,7	6,8	6,3	35	20	0,7	3,8	0,2	40,64	**570**	40,64	**570**

P	●	●
M	●	●
K	●	●
N	●	●
S	○	○
H	○	○
O	●	●

→ v_c Page 59

UltraMini – Inserts for internal chamfering for subsequent parting off

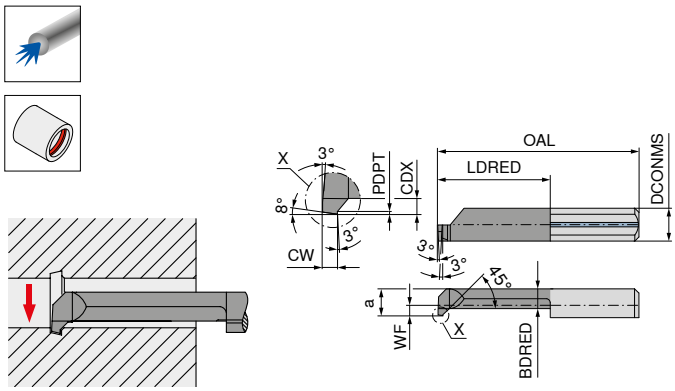

Illustrations show right-hand versions

TiN

TiN

Left-hand

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	CW	PDPT	73 009 ... EUR Y5		73 008 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 070.4-10	4	1,5	4	3,5	25	10	0,8	2,4	1	0,2	34,39	**410**	34,39	**410**
R/L 070.4-16	4	1,5	4	3,5	30	16	0,8	2,4	1	0,2	35,38	**416**	35,38	**416**
R/L 070.5-15	5	1,9	5	4,4	30	15	1,0	3,3	1	0,2	34,82	**551**	34,82	**551**
R/L 070.5-20	5	1,9	5	4,4	35	20	1,0	3,3	1	0,2	38,09	**550**	38,09	**550**
R/L 070.5-30	5	1,9	5	4,4	45	30	1,0	3,3	1	0,2	47,90	**530**	47,90	**530**
R/L 070.6-30	6	2,3	6	5,3	45	30	1,0	4,2	1	0,2	47,90	**630**	47,90	**630**
R/L 070.6-42	6	2,3	6	5,3	57	42	1,0	4,2	1	0,2	55,99	**642**	55,99	**642**

P	●	●
M	●	●
K	●	●
N	●	●
S	○	○
H	○	○
O	●	●

→ v_c Page 59

UltraMini – Inserts for Internal Grooving



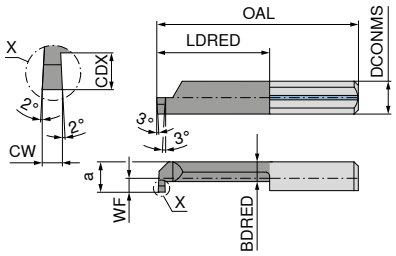

Illustrations show right-hand versions

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	CW	Left-hand 73 003 ... EUR Y5		Right-hand 73 002 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 004.0100-10	4	1,5	4,0	3,5	24	10	0,8	2,4	1,0	33,10	540	33,10	540
R/L 004.0100-16	4	1,5	4,0	3,5	30	16	0,8	2,4	1,0	38,09	541	38,09	541
R/L 004.0100-20	4	1,5	4,0	3,5	34	20	0,8	2,4	1,0	43,06	542	43,06	542
R/L 005.0100-10	5	1,9	5,0	4,4	25	10	1,0	3,3	1,0	32,69	650	32,69	650
R/L 005.0150-10	5	1,9	5,0	4,4	25	10	1,0	3,3	1,5	32,69	654	32,69	654
R/L 005.0200-10	5	1,9	5,0	4,4	25	10	1,0	3,3	2,0	32,69	658	32,69	658
R/L 005.0100-15	5	1,9	5,0	4,4	30	15	1,0	3,3	1,0	37,64	651	37,64	651
R/L 005.0150-15	5	1,9	5,0	4,4	30	15	1,0	3,3	1,5	37,64	655	37,64	655
R/L 005.0200-15	5	1,9	5,0	4,4	30	15	1,0	3,3	2,0	37,64	659	37,64	659
R/L 005.0100-20	5	1,9	5,0	4,4	35	20	1,0	3,3	1,0	42,50	551	42,50	551
R/L 005.0150-20	5	1,9	5,0	4,4	35	20	1,0	3,3	1,5	43,20	552	43,20	552
R/L 005.0200-20	5	1,9	5,0	4,4	35	20	1,0	3,3	2,0	42,50	553	42,50	553
R/L 005.0100-25	5	1,9	5,0	4,4	40	25	1,0	3,3	1,0	46,46	652	46,46	652
R/L 005.0150-25	5	1,9	5,0	4,4	40	25	1,0	3,3	1,5	46,46	656	46,46	656
R/L 005.0200-25	5	1,9	5,0	4,4	40	25	1,0	3,3	2,0	46,92	750	46,92	750
R/L 005.0100-30	5	1,9	5,0	4,4	45	30	1,0	3,3	1,0	51,72	653	51,72	653
R/L 005.0150-30	5	1,9	5,0	4,4	45	30	1,0	3,3	1,5	51,72	657	51,72	657
R/L 005.0200-30	5	1,9	5,0	4,4	45	30	1,0	3,3	2,0	51,86	751	51,86	751
R/L 005.0100-35	5	1,9	5,0	4,4	50	35	1,0	3,3	1,0	54,13	680	54,13	680
R/L 006.0100-10	6	2,3	6,0	5,3	25	10	1,8	3,4	1,0	32,83	660	32,83	660
R/L 006.0150-10	6	2,3	6,0	5,3	25	10	1,8	3,4	1,5	32,83	664	32,83	664
R/L 006.0200-10	6	2,3	6,0	5,3	25	10	1,8	3,4	2,0	32,83	668	32,83	668
R/L 006.0100-15	6	2,3	6,0	5,3	30	15	1,8	3,4	1,0	37,95	661	37,95	661
R/L 006.0150-15	6	2,3	6,0	5,3	30	15	1,8	3,4	1,5	37,95	665	37,95	665
R/L 006.0200-15	6	2,3	6,0	5,3	30	15	1,8	3,4	2,0	37,95	669	37,95	669
R/L 006.0100-22	6	2,3	6,0	5,3	37	22	1,8	3,4	1,0	42,79	561	42,79	561
R/L 006.0150-22	6	2,3	6,0	5,3	37	22	1,8	3,4	1,5	42,79	562	42,79	562
R/L 006.0200-22	6	2,3	6,0	5,3	37	22	1,8	3,4	2,0	42,79	563	42,79	563
R/L 006.0100-25	6	2,3	6,0	5,3	40	25	1,8	3,4	1,0	46,92	662	46,92	662
R/L 006.0150-25	6	2,3	6,0	5,3	40	25	1,8	3,4	1,5	46,92	666	46,92	666
R/L 006.0200-25	6	2,3	6,0	5,3	40	25	1,8	3,4	2,0	46,92	760	46,92	760
R/L 006.0100-30	6	2,3	6,0	5,3	45	30	1,8	3,4	1,0	51,86	663	51,86	663
R/L 006.0150-30	6	2,3	6,0	5,3	45	30	1,8	3,4	1,5	51,86	667	51,86	667
R/L 006.0200-30	6	2,3	6,0	5,3	45	30	1,8	3,4	2,0	51,86	761	51,86	761
R/L 006.0100-35	6	2,3	6,0	5,3	50	35	1,8	3,4	1,0	54,13	682	54,13	682
R/L 006.0150-35	6	2,3	6,0	5,3	50	35	1,8	3,4	1,5	54,13	684	54,13	684
R/L 006.0100-42	6	2,3	6,0	5,3	57	42	1,8	3,4	1,0	59,67	685	59,67	685
R/L 007.0100-10	7	2,7	6,8	6,3	25	10	2,5	3,8	1,0	33,10	570	33,10	570
R/L 007.0150-10	7	2,7	6,8	6,3	25	10	2,5	3,8	1,5	33,10	575	33,10	575
R/L 007.0200-10	7	2,7	6,8	6,3	25	10	2,5	3,8	2,0	33,10	670	33,10	670
R/L 007.0100-15	7	2,7	6,8	6,3	30	15	2,5	3,8	1,0	38,35	571	38,35	571
R/L 007.0150-15	7	2,7	6,8	6,3	30	15	2,5	3,8	1,5	38,35	576	38,35	576
R/L 007.0200-15	7	2,7	6,8	6,3	30	15	2,5	3,8	2,0	38,35	671	38,35	671
R/L 007.0100-22	7	2,7	6,8	6,3	37	22	2,5	3,8	1,0	43,06	572	43,06	572
R/L 007.0150-22	7	2,7	6,8	6,3	37	22	2,5	3,8	1,5	43,06	577	43,06	577
R/L 007.0200-22	7	2,7	6,8	6,3	37	22	2,5	3,8	2,0	43,06	672	43,06	672
R/L 007.0100-25	7	2,7	6,8	6,3	40	25	2,5	3,8	1,0	47,45	573	47,45	573
R/L 007.0150-25	7	2,7	6,8	6,3	40	25	2,5	3,8	1,5	47,45	578	47,45	578
R/L 007.0200-25	7	2,7	6,8	6,3	40	25	2,5	3,8	2,0	47,45	673	47,45	673
R/L 007.0100-30	7	2,7	6,8	6,3	45	30	2,5	3,8	1,0	53,00	574	53,00	574
R/L 007.0150-30	7	2,7	6,8	6,3	45	30	2,5	3,8	1,5	53,00	579	53,00	579
R/L 007.0200-30	7	2,7	6,8	6,3	45	30	2,5	3,8	2,0	53,00	674	53,00	674
R/L 007.0100-35	7	2,7	7,0	6,3	50	35	2,5	3,8	1,0	54,58	688	54,58	688
R/L 007.0150-35	7	2,7	7,0	6,3	50	35	2,5	3,8	1,5	54,58	690	54,58	690
R/L 007.0200-35	7	2,7	7,0	6,3	50	35	2,5	3,8	2,0	54,58	692	54,58	692
R/L 007.0100-40	7	2,7	7,0	6,3	55	40	2,5	3,8	1,0	60,80	700	60,80	700
R/L 007.0150-40	7	2,7	7,0	6,3	55	40	2,5	3,8	1,5	60,80	702	60,80	702
R/L 007.0100-45	7	2,7	7,0	6,3	60	45	2,5	3,8	1,0	65,80	712	65,80	712
R/L 007.0100-50	7	2,7	7,0	6,3	65	50	2,5	3,8	1,0	70,47	714	70,47	714

P	●	●
M	●	●
K	●	●
N	●	●
S	○	○
H	○	○
O	●	●

→ v_c Page 59

12

UltraMini – Inserts for Internal Grooving



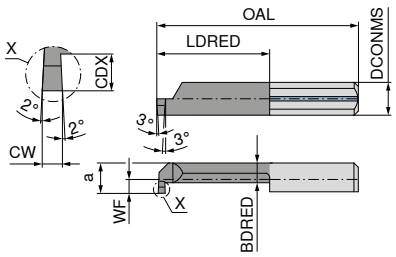

Illustrations show right-hand versions

TiAlN

TiAlN

	Left-hand		Right-hand	
	73 003 ...		**73 002 ...**	
ISO designation	**EUR** Y5		**EUR** Y5	
R/L 002.0050-5	39,93	**820**	39,93	**820**
R/L 002.0050-10	41,08	**821**	41,08	**821**
R/L 002.0050-15	45,03	**822**	45,03	**822**
R/L 003.0070-5	37,81	**830**	37,81	**830**
R/L 003.0070-10	42,61	**831**	42,61	**831**
R/L 003.0070-16	47,63	**832**	47,63	**832**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

ISO designation	DCONMS $_{h6}$	WF	DMIN	a	OAL	LDRED	CDX	BDRED	CW
	mm	mm	mm	mm	mm	mm	mm	mm	mm
R/L 002.0050-5	4		2	1,8	19	5	0,4	1,2	0,5
R/L 002.0050-10	4		2	1,8	24	10	0,4	1,2	0,5
R/L 002.0050-15	4		2	1,8	29	15	0,4	1,2	0,5
R/L 003.0070-5	4	0,7	3	2,7	19	5	0,6	1,9	0,7
R/L 003.0070-10	4	0,7	3	2,7	24	10	0,6	1,9	0,7
R/L 003.0070-16	4	0,7	3	2,7	30	16	0,6	1,9	0,7

UltraMini – Inserts for Internal Grooving

▲ with corner radius
▲ CDX = Maximum depth of cut when turning outwards

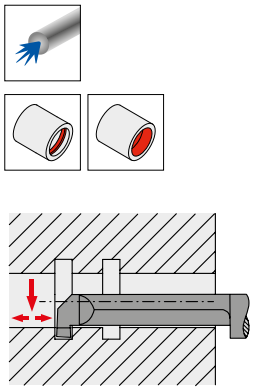

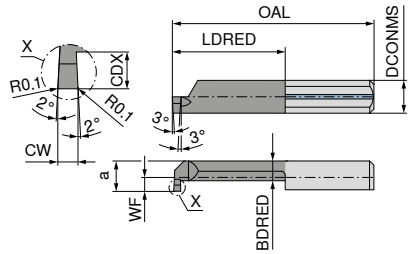

Illustrations show right-hand versions

TiAlN

Left-hand

TiAlN

Right-hand

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	CW	73 203 ... EUR Y5		73 202 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 004M0100-10	4	1,5	4,0	3,5	24	10	0,8	2,4	1,0	36,81	800	36,81	800
R/L 004M0100-16	4	1,5	4,0	3,5	30	16	0,8	2,4	1,0	42,34	802	42,34	802
R/L 004M0100-20	4	1,5	4,0	3,5	34	20	0,8	2,4	1,0	46,46	804	46,46	804
R/L 005M0100-10	5	1,9	5,0	4,4	25	10	1,0	3,3	1,0	34,96	806	34,96	806
R/L 005M0150-10	5	1,9	5,0	4,4	25	10	1,0	3,3	1,5	34,96	816	34,96	816
R/L 005M0200-10	5	1,9	5,0	4,4	25	10	1,0	3,3	2,0	34,96	826	34,96	826
R/L 005M0100-15	5	1,9	5,0	4,4	30	15	1,0	3,3	1,0	40,08	808	40,08	808
R/L 005M0150-15	5	1,9	5,0	4,4	30	15	1,0	3,3	1,5	40,08	818	40,08	818
R/L 005M0200-15	5	1,9	5,0	4,4	30	15	1,0	3,3	2,0	40,08	828	40,08	828
R/L 005M0100-20	5	1,9	5,0	4,4	35	20	1,0	3,3	1,0	44,62	810	44,62	810
R/L 005M0150-20	5	1,9	5,0	4,4	35	20	1,0	3,3	1,5	44,62	820	44,62	820
R/L 005M0200-20	5	1,9	5,0	4,4	35	20	1,0	3,3	2,0	44,62	830	44,62	830
R/L 005M0100-25	5	1,9	5,0	4,4	40	25	1,0	3,3	1,0	48,59	812	48,59	812
R/L 005M0150-25	5	1,9	5,0	4,4	40	25	1,0	3,3	1,5	48,59	822	48,59	822
R/L 005M0200-25	5	1,9	5,0	4,4	40	25	1,0	3,3	2,0	48,59	832	48,59	832
R/L 005M0100-30	5	1,9	5,0	4,4	45	30	1,0	3,3	1,0	53,86	814	53,86	814
R/L 005M0150-30	5	1,9	5,0	4,4	45	30	1,0	3,3	1,5	53,86	824	53,86	824
R/L 005M0200-30	5	1,9	5,0	4,4	45	30	1,0	3,3	2,0	53,86	834	53,86	834
R/L 006M0100-10	6	2,3	6,0	5,3	25	10	1,8	3,4	1,0	34,96	836	34,96	836
R/L 006M0150-10	6	2,3	6,0	5,3	25	10	1,8	3,4	1,5	34,96	846	34,96	846
R/L 006M0200-10	6	2,3	6,0	5,3	25	10	1,8	3,4	2,0	34,96	856	34,96	856
R/L 006M0100-15	6	2,3	6,0	5,3	30	15	1,8	3,4	1,0	40,08	838	40,08	838
R/L 006M0150-15	6	2,3	6,0	5,3	30	15	1,8	3,4	1,5	40,08	848	40,08	848
R/L 006M0200-15	6	2,3	6,0	5,3	30	15	1,8	3,4	2,0	40,08	858	40,08	858
R/L 006M0100-20	6	2,3	6,0	5,3	35	22	1,8	3,4	1,0	44,62	840	44,62	840
R/L 006M0150-20	6	2,3	6,0	5,3	37	22	1,8	3,4	1,5	44,62	850	44,62	850
R/L 006M0200-20	6	2,3	6,0	5,3	37	22	1,8	3,4	2,0	44,62	860	44,62	860
R/L 006M0100-25	6	2,3	6,0	5,3	40	25	1,8	3,4	1,0	48,59	842	48,59	842
R/L 006M0150-25	6	2,3	6,0	5,3	40	25	1,8	3,4	1,5	48,59	852	48,59	852
R/L 006M0200-25	6	2,3	6,0	5,3	40	25	1,8	3,4	2,0	48,59	862	48,59	862
R/L 006M0100-30	6	2,3	6,0	5,3	45	30	1,8	3,4	1,0	53,86	844	53,86	844
R/L 006M0150-30	6	2,3	6,0	5,3	45	30	1,8	3,4	1,5	53,86	854	53,86	854
R/L 006M0200-30	6	2,3	6,0	5,3	45	30	1,8	3,4	2,0	53,86	864	53,86	864
R/L 007M0100-10	7	2,7	6,8	6,3	25	10	2,5	3,7	1,0	34,96	866	34,96	866
R/L 007M0150-10	7	2,7	6,8	6,3	25	10	2,5	3,7	1,5	34,96	876	34,96	876
R/L 007M0200-10	7	2,7	6,8	6,3	25	10	2,5	3,7	2,0	34,96	886	34,96	886
R/L 007M0100-15	7	2,7	6,8	6,3	30	15	2,5	3,7	1,0	40,08	868	40,08	868
R/L 007M0150-15	7	2,7	6,8	6,3	30	15	2,5	3,7	1,5	40,08	878	40,08	878
R/L 007M0200-15	7	2,7	6,8	6,3	30	15	2,5	3,7	2,0	40,08	888	40,08	888
R/L 007M0100-22	7	2,7	6,8	6,3	37	22	2,5	3,7	1,0	44,62	870	44,62	870
R/L 007M0150-22	7	2,7	6,8	6,3	37	22	2,5	3,7	1,5	44,62	880	44,62	880
R/L 007M0200-22	7	2,7	6,8	6,3	37	22	2,5	3,7	2,0	44,62	890	44,62	890
R/L 007M0100-25	7	2,7	6,8	6,3	40	25	2,5	3,7	1,0	48,59	872	48,59	872
R/L 007M0150-25	7	2,7	6,8	6,3	40	25	2,5	3,7	1,5	48,59	882	48,59	882
R/L 007M0200-25	7	2,7	6,8	6,3	40	25	2,5	3,7	2,0	48,59	892	48,59	892
R/L 007M0100-30	7	2,7	6,8	6,3	45	30	2,5	3,7	1,0	54,29	874	54,29	874
R/L 007M0150-30	7	2,7	6,8	6,3	45	30	2,5	3,7	1,5	54,29	884	54,29	884
R/L 007M0200-30	7	2,7	6,8	6,3	45	30	2,5	3,7	2,0	54,29	894	54,29	894
P										●		●	
M										●		●	
K										●		●	
N										●		●	
S										●		●	
H										●		●	
O										●		●	

→ v_c Page 59

12

UltraMini – Inserts for internal undercuts

▲ CDX = Maximum depth of cut when turning outwards





Illustrations show right-hand versions

TiN	TiN	TiAlN	TiAlN
Left-hand	Right-hand	Left-hand	Right-hand
73 011 ...	**73 010 ...**	**73 011 ...**	**73 010 ...**

ISO designation	DCONMS h6	WF	DMIN	a	OAL	LDRED	CDX	BDRED	EUR		EUR		EUR		EUR	
	mm	mm	mm	mm	mm	mm	mm	mm	Y5		Y5		Y5		Y5	
R/L 047.2-10	4		2,0	1,7	24	10	0,4	1,2					36,81	**221**	36,81	**221**
R/L 047.3-15	4	0,6	2,8	2,6	29	15	0,6	1,9					38,35	**231**	38,35	**231**
R/L 047.4-10	4	1,5	4,0	3,5	24	10	0,6	2,8					35,10	**241**	35,10	**241**
R/L 047.T4-20	4	1,5	4,0	3,5	34	20	0,6	2,8					41,20	**242**	41,20	**242**
R/L 047.4-20	4	1,5	4,0	3,5	34	20	0,3	3,0	40,64	**542**	40,64	**542**				
R/L 047.5-15	5	1,9	5,0	4,4	30	15	0,8	3,5					39,50	**251**	39,50	**251**
R/L 047.T5-25	5	1,9	5,0	4,4	40	25	0,8	3,5					41,79	**252**	41,79	**252**
R/L 047.5-25	5	1,9	5,0	4,4	40	25	0,5	3,8	41,34	**552**	41,34	**552**				
R/L 047.T6-22	6	2,3	6,0	5,3	37	22	1,8	3,4					40,49	**262**	40,49	**262**
R/L 047.T6-30	6	2,3	6,0	5,3	45	30	1,8	3,4					42,79	**263**	42,79	**263**
R/L 047.6-30	6	2,3	6,0	5,3	45	30	0,5	4,5	42,34	**562**	42,34	**562**				

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	●	●	●	●
S	○	○	●	●
H	○	○	●	●
O	●	●	●	●

→ v_c Page 59

UltraMini – Inserts for internal grooving and turning

▲ CDX = Maximum depth of cut when turning outwards

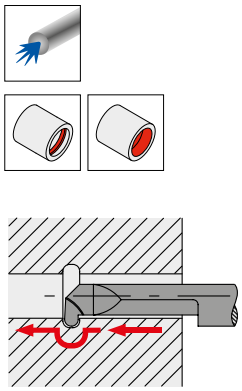

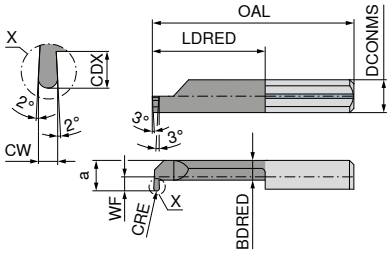

Illustrations show right-hand versions

TiN

Left-hand

TiN

Right-hand

ISO designation	DCONMS h6 mm	WF mm	DMIN mm	a mm	OAL mm	LDRED mm	CDX mm	BDRED mm	CW mm	CRE mm	73 019 ... EUR Y5		73 018 ... EUR Y5	
R/L 006-0.75-25	6	2,3	6,0	5,3	40	25	1,8	3,4	1,5	0,75	42,61	**564**	42,61	**564**
R/L 004-0.50-16	4	1,5	4,0	3,5	30	16	0,8	2,4	1,0	0,50	40,21	**541**	40,21	**541**
R/L 005-0.50-20	5	1,9	5,0	4,4	35	20	1,0	3,3	1,0	0,50	41,79	**552**	41,79	**552**
R/L 005-0.75-20	5	1,9	5,0	4,4	35	20	1,0	3,3	1,5	0,75	41,79	**554**	41,79	**554**
R/L 005-1.00-20	5	1,9	5,0	4,4	35	20	1,0	3,3	2,0	1,00	41,79	**556**	41,79	**556**
R/L 006-0.50-25	6	2,3	6,0	5,3	40	25	1,8	3,4	1,0	0,50	42,61	**562**	42,61	**562**
R/L 006-1.00-25	6	2,3	6,0	5,3	40	25	1,8	3,4	2,0	1,00	42,61	**566**	42,61	**566**
R/L 007-0.50-30	7	2,7	6,8	6,3	45	30	2,5	3,8	1,0	0,50	44,20	**572**	44,20	**572**
R/L 007-0.75-30	7	2,7	6,8	6,3	45	30	2,5	3,8	1,5	0,75	44,20	**574**	44,20	**574**
R/L 007-1.00-30	7	2,7	6,8	6,3	45	30	2,5	3,8	2,0	1,00	44,20	**576**	44,20	**576**

P	●	●
M	●	●
K	●	●
N	●	●
S	○	○
H	○	○
O	●	●

→ v_c Page 59

12

UltraMini – Inserts for internal threading (Partial profile)

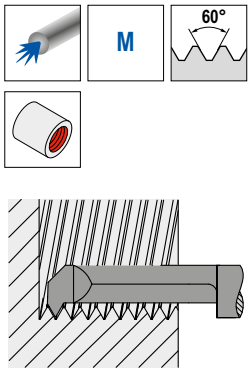

Illustrations show right-hand versions

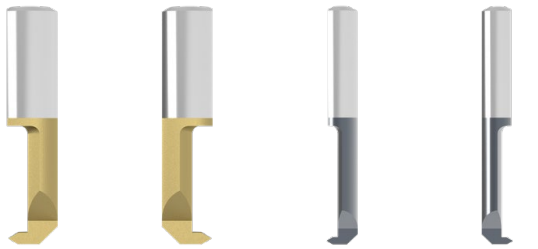

ISO designation	DCONMS	TP	WF	DMIN	a	OAL	LDRED	BDRED	PDPT	PDX	Left-hand 73 101 ... EUR Y5		Right-hand 73 100 ... EUR Y5		Left-hand 73 101 ... EUR Y5		Right-hand 73 100 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm								
R/L 003.0105-8	4	0,5 - 0,7	0,30	2,4	2,3	22	8	1,8	0,27	0,33					37,23	551	37,23	551
R/L 004.0408-15	4	0,8 - 1,0	1,75	4,0	3,5	30	15	2,4	0,43	0,45					38,79	552	38,79	552
R/L 005.0510-20	5	1,0 - 1,25	1,90	4,8	4,4	35	20	3,3	0,55	0,55	36,38	544	36,38	544				
R/L 005.0510-15	5	1,0 - 1,25	1,90	4,8	4,4	30	15	3,3	0,55	0,55	36,10	545	36,10	545				
R/L 006.0612-22	6	1,25 - 1,5	2,30	6,0	5,3	37	22	3,4	0,68	0,65	36,94	546	36,94	546				
R/L 006.0612-15	6	1,25 - 1,5	2,30	6,0	5,3	30	15	3,4	0,68	0,65	36,10	547	36,10	547				
R/L 006.0815-15	6	1,5 - 1,75	2,30	6,0	5,3	30	15	3,4	0,81	0,75	36,10	549	36,10	549				
R/L 006.0815-22	6	1,5 - 1,75	2,30	6,0	5,3	37	22	3,4	0,81	0,75	36,94	548	36,94	548				
R/L 007.0815-15	7	1,5 - 1,75	2,70	7,0	6,3	30	15	3,8	0,81	0,75	36,94	550	36,94	550				
P											●		●		●		●	
M											●		●		●		●	
K											●		●		●		●	
N											●		●		●		●	
S											○		○		●		●	
H											○		○		●		●	
O											●		●		●		●	

→ v_c Page 59

UltraMini – Inserts for Internal thread turning (Full profile)

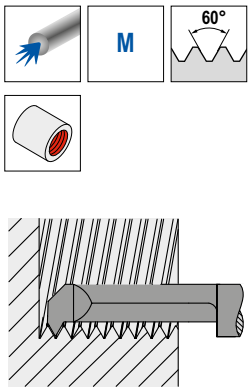

Illustrations show right-hand versions

ISO designation	DCONMS	TP	WF	DMIN	a	OAL	LDRED	BDRED	PDPT	PDX	CW	Left-hand 73 209 ... EUR Y5		Right-hand 73 208 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 105.0408-15	5	0,80	1,9	4,8	4,4	30	15	3,3	0,43	0,50	0,10	40,21	799	40,21	799
R/L 105.510-15	5	1,00	1,9	4,8	4,4	30	15	3,3	0,54	0,55	0,12	41,08	800	41,08	800
R/L 106.612-15	6	1,25	2,3	6,0	5,3	30	15	3,4	0,67	0,65	0,15	41,08	802	41,08	802
R/L 106.815-15	6	1,50	2,3	6,0	5,3	30	15	3,4	0,81	0,75	0,18	41,08	804	41,08	804
R/L 106.815-15	7	1,50	2,7	7,0	6,3	30	15	3,8	0,81	0,75	0,18	41,08	806	41,08	806
P												●		●	
M												●		●	
K												●		●	
N												●		●	
S												●		●	
H												●		●	
O												●		●	

→ v_c Page 59

UltraMini – Inserts for internal thread turning (Partial profile)

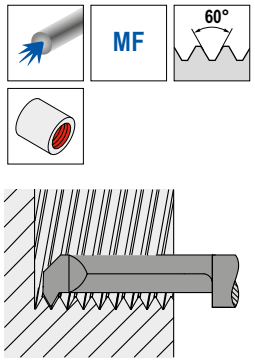

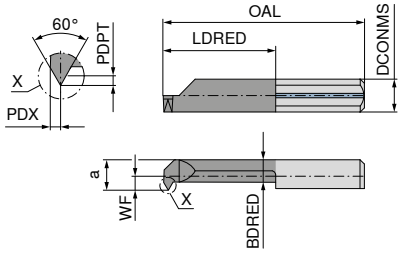

Illustrations show right-hand versions

ISO designation	DCONMS	TP	WF	DMIN	a	OAL	LDRED	BDRED	PDPT	PDX	Left-hand 73 103 ... EUR Y5		Right-hand 73 102 ... EUR Y5		Left-hand 73 103 ... EUR Y5		Right-hand 73 102 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm								
R/L 004.0205-15	4	0,5 - 0,75	1,5	4,0	3,5	30	15	2,4	0,27	0,35	37,95	510	37,95	510				
R/L 004.0105-10	4	0,5 - 0,75	1,0	3,2	3,0	24	10	2,3	0,27	0,44					36,65	509	36,65	509
R/L 005.0205-15	5	0,5 - 0,75	1,9	5,0	4,4	30	15	3,3	0,27	0,35	36,38	539	36,38	539				
R/L 005.0205-20	5	0,5 - 0,75	1,9	5,0	4,4	35	20	3,3	0,27	0,35	36,38	540	36,38	540				
L 005.0407-15	5	0,75 - 1,0	1,9	5,0	4,4	30	15	3,3	0,40	0,45	36,38	541						
R 005.0407-15	5	0,75 - 1,0	1,9	5,0	4,4	30	15	3,3	0,40	0,45			36,38	541				
R/L 005.0407-20	5	0,75 - 1,0	1,9	5,0	4,4	35	20	3,3	0,40	0,45	36,38	542	36,38	542				
R/L 006.0510-22	6	1,0 - 1,25	2,3	6,0	5,3	37	22	3,4	0,55	0,55	36,38	544	36,38	544				
R/L 006.0510-15	6	1,0 - 1,25	2,3	6,0	5,3	30	15	3,4	0,55	0,55	36,38	543	36,38	543				
P											●		●		●		●	
M											●		●		●		●	
K											●		●		●		●	
N											●		●		●		●	
S											○		○		●		●	
H											○		○		●		●	
O											●		●		●		●	

→ v_c Page 59

UltraMini – Inserts for Internal thread turning (Full profile)





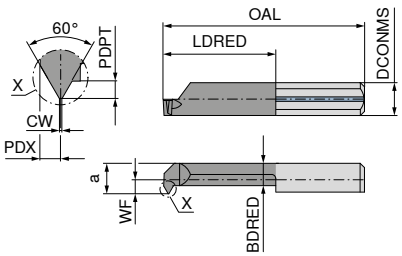

Illustrations show right-hand versions



ISO designation	DCONMS h6	TP	WF	DMIN	a	OAL	LDRED	BDRED	PDPT	PDX	CW	Left-hand 73 207 ... EUR Y5		Right-hand 73 206 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 104.0205-15	5	0,50	1,5	4	3,5	30	15	2,4	0,27	0,35	0,06	43,20	800	43,20	800
R/L 105.0205-15	5	0,50	1,9	5	4,4	30	15	3,3	0,27	0,35	0,06	41,20	802	41,20	802
R/L 105.0407-15	5	0,75	1,9	5	4,4	30	15	3,3	0,40	0,45	0,09	41,20	804	41,20	804
R/L 106.0510-15	6	1,00	2,3	6	5,3	30	15	3,4	0,54	0,55	0,12	41,20	806	41,20	806
P												●		●	
M												●		●	
K												●		●	
N												●		●	
S												●		●	
H												●		●	
O												●		●	

→ v_c Page 59

12

UltraMini – Inserts for internal thread turning (Partial profile)



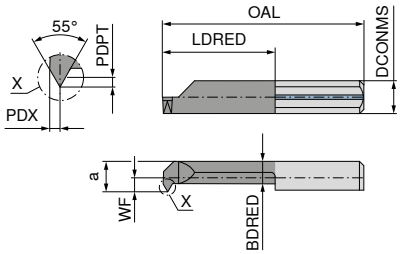

Illustrations show right-hand versions

TiN

Left-hand

TiN

Right-hand

ISO designation	DCONMS $_{h6}$ mm	TPI 1/"	WF mm	DMIN mm	a mm	OAL mm	LDRED mm	BDRED mm	PDPT mm	PDX mm	73 105 ... EUR Y5		73 104 ... EUR Y5	
R/L 005.5548-15	5	48 - 24	1,9	4,8	4,4	30	15	3,3	0,40	0,45	39,66	**552**	39,66	**552**
R/L 006.5548-15	6	48 - 24	2,3	6,0	5,3	30	15	3,4	0,40	0,45	39,66	**562**	39,66	**562**
R/L 006.5524-15	6	24 - 16	2,3	6,0	5,3	30	15	3,4	0,81	0,75	39,66	**563**	39,66	**563**
R/L 007.5524-15	7	24 - 16	2,7	7,0	6,3	30	15	3,8	0,81	0,75	39,66	**572**	39,66	**572**
P											●		●	
M											●		●	
K											●		●	
N											●		●	
S											○		○	
H											○		○	
O											●		●	

→ v_c Page 59

UltraMini – Inserts for axial grooving



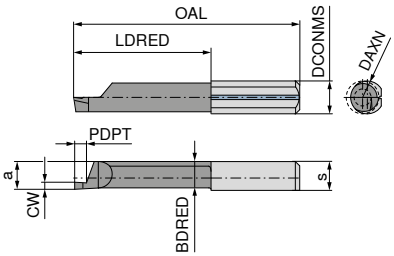

Illustrations show right-hand versions

TiAlN

TiAlN

ISO designation	DCONMS h6	a	DAXN	s	OAL	LDRED	PDPT	BDRED	CW	Left-hand 73 053 ... EUR Y5		Right-hand 73 052 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 010.1006-10	6	5,2	6	5,3	26	11	1,5	4,9	1,0	40,37	**561**	40,37	**561**
R/L 010.1506-10	6	5,2	6	5,3	26	11	2,0	4,9	1,5	40,37	**563**	40,37	**563**
R/L 010.1008-10	7	5,9	8	6,3	26	11	1,5	5,6	1,0	41,34	**571**	41,34	**571**
R/L 010.1008-20	7	5,9	8	6,3	35	20	1,5	5,6	1,0	44,20	**671**	44,20	**671**
R/L 010.1008-30	7	5,9	8	6,3	45	30	1,5	5,6	1,0	46,46	**771**	46,46	**771**
R/L 010.1508-10	7	5,9	8	6,3	26	11	2,5	5,6	1,5	41,34	**573**	41,34	**573**
R/L 010.1508-20	7	5,9	8	6,3	35	20	2,5	5,6	1,5	44,20	**673**	44,20	**673**
R/L 010.1508-30	7	5,9	8	6,3	45	30	2,5	5,6	1,5	46,46	**773**	46,46	**773**
R/L 010.2008-10	7	5,9	8	6,3	26	11	3,0	5,6	2,0	41,34	**575**	41,34	**575**
R/L 010.2008-20	7	5,9	8	6,3	35	20	3,0	5,6	2,0	44,20	**675**	44,20	**675**
R/L 010.2008-30	7	5,9	8	6,3	45	30	3,0	5,6	2,0	46,46	**775**	46,46	**775**
R/L 010.2508-10	7	5,9	8	6,3	26	11	3,5	5,6	2,5	41,34	**577**	41,34	**577**
R/L 010.2508-20	7	5,9	8	6,3	35	20	3,5	5,6	2,5	44,20	**677**	44,20	**677**
R/L 010.2508-30	7	5,9	8	6,3	45	30	3,5	5,6	2,5	46,46	**777**	46,46	**777**
R/L 010.3008-10	7	5,9	8	6,3	26	11	3,5	5,6	3,0	41,34	**579**	41,34	**579**
R/L 010.3008-20	7	5,9	8	6,3	35	20	3,5	5,6	3,0	44,20	**679**	44,20	**679**
R/L 010.3008-30	7	5,9	8	6,3	45	30	3,5	5,6	3,0	46,46	**779**	46,46	**779**
P										●		●	
M										●		●	
K										●		●	
N										●		●	
S										●		●	
H										●		●	
O										●		●	

→ v_c Page 59

12

UltraMini – Inserts for axial grooving

▲ with corner radius





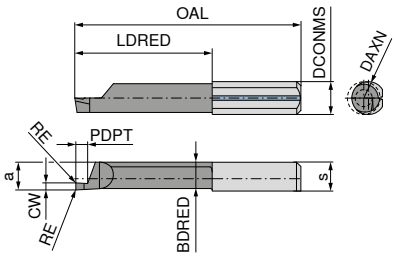

Illustrations show right-hand versions

TiAlN

Left-hand

TiAlN

Right-hand

ISO designation	DCONMS h6	a	DAXN	s	OAL	LDRED	PDPT	BDRED	CW	RE	73 253 ... EUR Y5		73 252 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 510M1008-10	5	4,3	5	6,3	26	11	2	4,0	1,0	0,05	47,74	**510**	47,74	**510**
R/L 510M1008-20	5	4,3	5	6,3	35	20	2	4,0	1,0	0,05	50,44	**610**	50,44	**610**
R/L 510M1508-10	5	4,3	5	6,3	26	11	3	4,0	1,5	0,05	47,74	**515**	47,74	**515**
R/L 510M1508-20	5	4,3	5	6,3	35	20	3	4,0	1,5	0,05	50,44	**615**	50,44	**615**
R/L 510M2008-10	5	4,3	5	6,3	26	11	4	4,0	2,0	0,05	47,74	**520**	47,74	**520**
R/L 510M2008-20	5	4,3	5	6,3	35	20	4	4,0	2,0	0,05	50,44	**620**	50,44	**620**
R/L 010M1008-10	7	5,9	8	6,3	26	11	2	5,6	1,0	0,10	48,88	**800**	48,88	**800**
R/L 010M1008-20	7	5,9	8	6,3	35	20	2	5,6	1,0	0,10	51,58	**810**	51,58	**810**
R/L 010M1008-30	7	5,9	8	6,3	45	30	2	5,6	1,0	0,10	53,99	**820**	53,99	**820**
R/L 010M1508-10	7	5,9	8	6,3	26	11	3	5,6	1,5	0,10	48,88	**802**	48,88	**802**
R/L 010M1508-20	7	5,9	8	6,3	35	20	3	5,6	1,5	0,10	51,58	**812**	51,58	**812**
R/L 010M1508-30	7	5,9	8	6,3	45	30	3	5,6	1,5	0,10	53,99	**822**	53,99	**822**
R/L 010M2008-10	7	5,9	8	6,3	26	11	4	5,6	2,0	0,10	48,88	**804**	48,88	**804**
R/L 010M2008-20	7	5,9	8	6,3	35	20	4	5,6	2,0	0,10	51,58	**814**	51,58	**814**
R/L 010M2008-30	7	5,9	8	6,3	45	30	4	5,6	2,0	0,10	53,99	**824**	53,99	**824**
R/L 010M2508-10	7	5,9	8	6,3	26	11	5	5,6	2,5	0,10	48,88	**806**	48,88	**806**
R/L 010M2508-20	7	5,9	8	6,3	35	20	5	5,6	2,5	0,10	51,58	**816**	51,58	**816**
R/L 010M2508-30	7	5,9	8	6,3	45	30	5	5,6	2,5	0,10	53,99	**826**	53,99	**826**
R/L 010M3008-10	7	5,9	8	6,3	26	11	6	5,6	3,0	0,10	48,88	**808**	48,88	**808**
R/L 010M3008-20	7	5,9	8	6,3	35	20	6	5,6	3,0	0,10	51,58	**818**	51,58	**818**
R/L 010M3008-30	7	5,9	8	6,3	45	30	6	5,6	3,0	0,10	53,99	**828**	53,99	**828**
P												●		●
M												●		●
K												●		●
N												●		●
S												●		●
H												●		●
O												●		●

→ v_c Page 59

UltraMini – Inserts for axial grooving (Full radius)



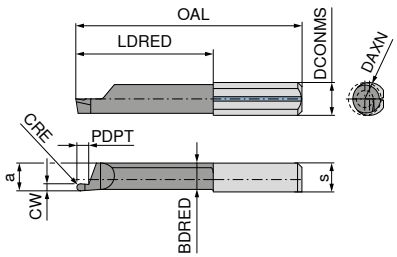

Illustrations show right-hand versions

TiAlN

Left-hand

TiAlN

Right-hand

ISO designation	DCONMS h6	a	DAXN	s	OAL	LDRED	PDPT	BDRED	CW	CRE	73 059 ... EUR Y5		73 058 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 610.1005-10	6	5,2	6	5,3	26	11	2	4,9	1,0	0,50	48,59	**071**	48,59	**071**
R/L 610.1005-20	6	5,2	6	5,3	35	20	2	4,9	1,0	0,50	51,46	**171**	51,46	**171**
R/L 610.1608-10	6	5,2	6	5,3	26	11	3	4,9	1,6	0,80	48,59	**073**	48,59	**073**
R/L 610.1608-20	6	5,2	6	5,3	35	20	3	4,9	1,6	0,80	51,46	**173**	51,46	**173**
R/L 610.2010-10	6	5,2	6	5,3	26	11	4	4,9	2,0	1,00	48,59	**075**	48,59	**075**
R/L 610.2010-20	6	5,2	6	5,3	35	20	4	4,9	2,0	1,00	51,46	**175**	51,46	**175**
R/L 610.2512-10	6	5,2	6	5,3	26	11	5	4,9	2,5	1,25	48,59	**077**	48,59	**077**
R/L 610.2512-20	6	5,2	6	5,3	35	20	5	4,9	2,5	1,25	51,46	**177**	51,46	**177**
R/L 610.3015-10	6	5,2	6	5,3	26	11	6	4,9	3,0	1,50	48,59	**079**	48,59	**079**
R/L 610.3015-20	6	5,2	6	5,3	35	20	6	4,9	3,0	1,50	51,46	**179**	51,46	**179**
R/L 010.1005-10	7	5,9	8	6,3	26	11	2	5,6	1,0	0,50	47,63	**571**	47,63	**571**
R/L 010.1005-20	7	5,9	8	6,3	35	20	2	5,6	1,0	0,50	50,29	**671**	50,29	**671**
R/L 010.1608-10	7	5,9	8	6,3	26	11	3	5,6	1,6	0,80	47,63	**573**	47,63	**573**
R/L 010.1608-20	7	5,9	8	6,3	35	20	3	5,6	1,6	0,80	50,29	**673**	50,29	**673**
R/L 010.2010-10	7	5,9	8	6,3	26	11	4	5,6	2,0	1,00	47,63	**575**	47,63	**575**
R/L 010.2010-20	7	5,9	8	6,3	35	20	4	5,6	2,0	1,00	50,29	**675**	50,29	**675**
R/L 010.2512-10	7	5,9	8	6,3	26	11	5	5,6	2,5	1,25	47,63	**577**	47,63	**577**
R/L 010.2512-20	7	5,9	8	6,3	35	20	5	5,6	2,5	1,25	50,29	**677**	50,29	**677**
R/L 010.3015-10	7	5,9	8	6,3	26	11	6	5,6	3,0	1,50	47,63	**579**	47,63	**579**
R/L 010.3015-20	7	5,9	8	6,3	35	20	6	5,6	3,0	1,50	50,29	**679**	50,29	**679**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

12

UltraMini – Inserts for axial grooving over a spigot


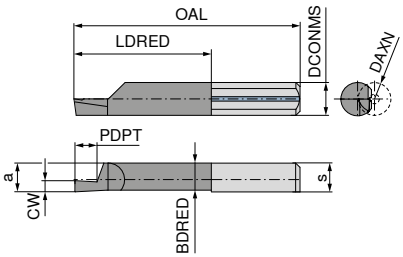

Illustrations show right-hand versions

ISO designation	DCONMS h6	a	DAXN	s	OAL	LDRED	PDPT	BDRED	CW	Left-hand 73 061 ... EUR Y5		Right-hand 73 060 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 620.1006-20	6	5,2	6	5,3	35	20	2	4,9	1,0	50,29	**561**	50,29	**561**
R/L 620.1506-20	6	5,2	6	5,3	35	20	3	4,9	1,5	50,29	**563**	50,29	**563**
R/L 620.2006-20	6	5,2	6	5,3	35	20	4	4,9	2,0	50,29	**565**	50,29	**565**
R/L 620.2506-20	6	5,2	6	5,3	35	20	5	4,9	2,5	50,29	**567**	50,29	**567**
R/L 620.3006-20	6	5,2	6	5,3	35	20	6	4,9	3,0	50,29	**569**	50,29	**569**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

UltraMini – Inserts for axial grooving over a spigot

▲ with corner radius


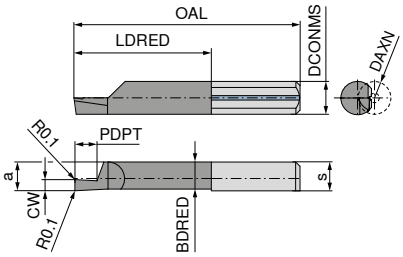

Illustrations show right-hand versions

ISO designation	DCONMS h6	a	DAXN	s	OAL	LDRED	PDPT	BDRED	CW	Left-hand 73 261 ... EUR Y5		Right-hand 73 260 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
R/L 620M1006-20	6	5,2	6	5,3	35	20	2	4,9	1,0	52,16	**800**	52,16	**800**
R/L 620M1506-20	6	5,2	6	5,3	35	20	3	4,9	1,5	52,16	**802**	52,16	**802**
R/L 620M2006-20	6	5,2	6	5,3	35	20	4	4,9	2,0	52,16	**804**	52,16	**804**
R/L 620M2506-20	6	5,2	6	5,3	35	20	5	4,9	2,5	52,16	**806**	52,16	**806**
R/L 620M3006-20	6	5,2	6	5,3	35	20	6	4,9	3,0	52,16	**808**	52,16	**808**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

UltraMini – Inserts for axial grooving

▲ up to 70 bar
▲ dual cooling channel



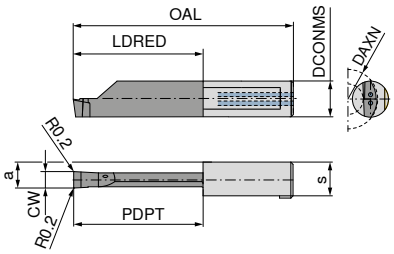

Illustrations show right-hand versions

TiAlN

TiAlN

ISO designation	DCONMS h6	a	DAXN	s	OAL	LDRED	PDPT	CW	Left-hand 73 263 ... EUR		Y5	Right-hand 73 262 ... EUR		Y5
	mm	mm	mm	mm	mm	mm	mm	mm						
R/L 012.0200-10	8	5,00	12	7,3	30	10	10	2,0	67,06	**700**		67,06	**700**	
R/L 012.0200-15	8	5,00	12	7,3	35	15	15	2,0	67,94	**702**		67,94	**702**	
R/L 012.0250-10	8	5,25	12	7,3	30	10	10	2,5	67,06	**704**		67,06	**704**	
R/L 012.0250-20	8	5,25	12	7,3	40	20	20	2,5	68,77	**706**		68,77	**706**	
R/L 016.0300-10	8	5,50	16	7,3	30	10	10	3,0	68,34	**800**		68,34	**800**	
R/L 016.0300-20	8	5,50	16	7,3	40	20	20	3,0	70,18	**802**		70,18	**802**	
R/L 020.0300-25	8	5,50	20	7,3	45	25	25	3,0	71,07	**804**		71,07	**804**	
R/L 020.0300-30	8	5,50	20	7,3	50	30	30	3,0	71,07	**806**		71,07	**806**	
R/L 020.0300-35	8	5,50	20	7,3	55	35	35	3,0	72,89	**808**		72,89	**808**	
R/L 020.0300-40	8	5,50	20	7,3	60	40	40	3,0	72,89	**810**		72,89	**810**	
R/L 016.0400-10	8	6,00	16	7,3	30	10	10	4,0	68,34	**812**		68,34	**812**	
R/L 016.0400-20	8	6,00	16	7,3	40	20	20	4,0	70,18	**814**		70,18	**814**	
R/L 020.0400-25	8	6,00	20	7,3	45	25	25	4,0	71,07	**816**		71,07	**816**	
R/L 020.0400-30	8	6,00	20	7,3	50	30	30	4,0	71,07	**818**		71,07	**818**	
R/L 020.0400-35	8	6,00	20	7,3	55	35	35	4,0	72,89	**820**		72,89	**820**	
R/L 020.0400-40	8	6,00	20	7,3	60	40	40	4,0	72,89	**822**		72,89	**822**	
R/L 020.0500.20	8	6,50	20	7,3	40	20	20	5,0	68,34	**824**		68,34	**824**	
R/L 020.0500.25	8	6,50	20	7,3	45	25	25	5,0	69,35	**826**		69,35	**826**	
R/L 020.0500.30	8	6,50	20	7,3	50	30	30	5,0	69,35	**828**		69,35	**828**	
R/L 020.0500.35	8	6,50	20	7,3	55	35	35	5,0	71,07	**830**		71,07	**830**	
R/L 020.0500.40	8	6,50	20	7,3	60	40	40	5,0	71,07	**832**		71,07	**832**	

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

12

→ v_c Page 59

UltraMini – Inserts for axial grooving


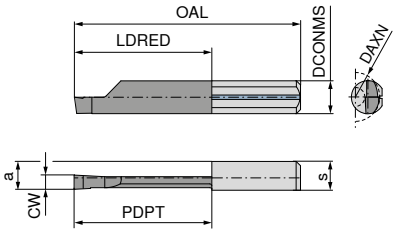

Illustrations show right-hand versions

ISO designation	DCONMS h6 mm	a mm	DAXN mm	s mm	OAL mm	LDRED mm	PDPT mm	CW mm	Left-hand 73 057 ... EUR Y5		Right-hand 73 056 ... EUR Y5	
R/L 015.2515-20	7	5,9	15	6,3	35	20	20	2,5	55,54	572	55,54	572
R/L 015.3015-20	7	5,9	15	6,3	35	20	20	3,0	55,54	574	55,54	574
R/L 015.3015-30	7	5,9	15	6,3	45	30	30	3,0	60,97	674	60,97	674

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

UltraMini – Inserts for axial grooving

▲ with corner radius


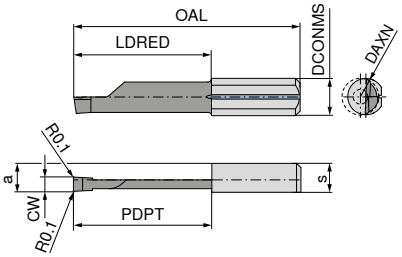

Illustrations show right-hand versions

ISO designation	DCONMS h6 mm	a mm	DAXN mm	s mm	OAL mm	LDRED mm	PDPT mm	CW mm	Left-hand 73 257 ... EUR Y5		Right-hand 73 256 ... EUR Y5	
R/L 015M2515-20	7	5,9	8	6,3	35	20	20	2,5	57,12	800	57,12	800
R/L 015M3015-20	7	5,9	8	6,3	35	20	20	3,0	57,12	802	57,12	802
R/L 015M3015-30	7	5,9	8	6,3	45	30	30	3,0	62,53	804	62,53	804

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

UltraMini – Set: Internal turning, grooving and chamfering, right hand

▲ extensive assortment of right-hand tools
▲ K10F – TiN



Grooving (E)



Profile turn (A)



Chamfers (F)

Tool	Designation	Article no.	Bore Ø mm	Boring depth mm	Grooving depth mm	Groove width mm	Piece	fig.	73 085 ... EUR Y5	
Inserts	**R 004.0100-16**	**73 002 541**	4	16	0,8	1,0	1	E		
Inserts	**R 005.0150-20**	**73 002 552**	5	20	1,0	1,5	1	E		
Inserts	**R 005.0200-20**	**73 002 553**	5	20	1,0	2,0	1	E		
Inserts	**R 006.0150-22**	**73 002 562**	6	22	1,8	1,5	1	E		
Inserts	**R 006.0200-22**	**73 002 563**	6	22	1,8	2,0	1	E		
Inserts	**R 050.3-16**	**73 004 530**	3	16			1	A	605,20	**999**
Inserts	**R 050.4-16**	**73 004 540**	4	16			1	A		
Inserts	**R 050.5-20**	**73 004 550**	5	20			1	A		
Inserts	**R 050.6-22**	**73 004 560**	6	22			1	A		
Inserts	**R 060.5-20**	**73 006 550**	5	20			1	F		
Tool holder	**645.0016-D**	**73 080 164**					1			
Tool holder	**676.0016-D**	**73 080 166**					1			
Tightening Key	**110.645**	**70 950 175**					1			

UltraMini – Set: Internal Turning

▲ extensive assortment of right-hand tools
▲ K10F – TiN



Tool	Designation	Article no.	Bore Ø mm	Boring depth mm	Piece	73 085 ... EUR Y5	
Inserts	R 050.3-16	73 004 530	3	16	1		
Inserts	R 050.4-16	73 004 540	4	16	1		
Inserts	R 050.5-20	73 004 550	5	20	1	387,50	**994**
Inserts	R 050.6-22	73 004 560	6	22	1		
Tool holder	645.0016-D	73 080 164			1		
Tool holder	676.0016-D	73 080 166			1		
Tightening Key	110.645	70 950 175			1		

UltraMini – Set: Holder

Tool	Designation	Article no.	for cutting insert Ø mm	Piece	73 085 ... EUR Y5	
Tool holder	**645.0016-D**	**73 080 164**	3 / 4 / 5	1		
Tool holder	**676.0016-D**	**73 080 166**	6 / 7	1	236,10	**990**
Tightening Key	**110.645**	**70 950 175**		1		

UltraMini – Set: Axial Grooving

▲ extensive assortment of right-hand tools
▲ K10F – TiN



73 085 ...

Tool	Designation	Article no.	Bore Ø mm	Boring depth mm	Grooving depth mm	Groove width mm	Piece	EUR Y5	
Inserts	**R 010.1008-10**	**73 050 571**	8	10	1,5	1,0	1		
Inserts	**R 010.1508-10**	**73 050 573**	8	10	2,5	1,5	1		
Inserts	**R 010.2008-10**	**73 050 575**	8	10	3,0	2,0	1	301,80	**996**
Inserts	**R 010.2508-20**	**73 050 677**	8	20	3,5	2,5	1		
Inserts	**R 010.3008-20**	**73 050 679**	8	20	3,5	3,0	1		
Tool holder	**676.0016-D**	**73 080 166**					1		
Tightening Key	**110.645**	**70 950 175**					1		

UltraMini – Standard tool holder for cutting inserts

▲ double ended
▲ Machining diameter from Ø 0.5 mm

Scope of supply:
Tool holder with allen key

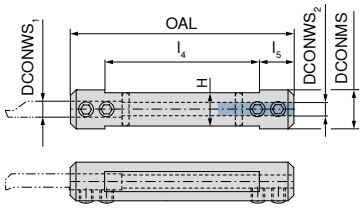

Designation	$DCONWS_1$ mm	$DCONWS_2$ mm	DCONMS mm	OAL mm	l_4 mm	l_5 mm	H mm	73 080 ... EUR Y5	
645.0012-D	4	5	12,00	75	55	10	10,3	112,20	**163**
645.0016-D	4	5	16,00	75	55	10	14,0	117,80	**164**
645.001905-D	4	5	19,05	90	70	10	17,2	132,20	**170**
645.0020-D	4	5	20,00	90	70	10	18,0	126,80	**165**
645.0022-D	4	5	22,00	90	70	10	20,0	138,00	**171**
645.00254-D	4	5	25,40	95	75	10	23,4	147,20	**172**
676.0016-D	6	7	16,00	75	55	10	14,0	117,80	**166**
676.001905-D	6	7	19,05	90	70	10	17,2	132,20	**173**
676.0020-D	6	7	20,00	90	70	10	18,0	126,80	**167**
676.0022-D	6	7	22,00	90	70	10	20,0	138,00	**174**
676.00254-D	6	7	25,40	95	75	10	23,4	147,20	**175**
687.0016-D	7	8	16,00	75	55	10	14,0	143,30	**168**
687.0020-D	7	8	20,00	90	70	10	18,0	152,50	**169**

Key I

Clamping screw

Spare parts for Article no.	70 950 ...	EUR 2A/28		73 082 ...	EUR Y5	
73 080 163	SW2,5	3,15	**175**	M5x4	3,67	**013**
73 080 164	SW2,5	3,15	**175**	M5x6	3,67	**001**
73 080 170	SW2,5	3,15	**175**	M5x6	3,67	**001**
73 080 165	SW2,5	3,15	**175**	M5x8	4,81	**008**
73 080 171	SW2,5	3,15	**175**	M5x8	4,81	**008**
73 080 172	SW2,5	3,15	**175**	M5x8	4,81	**008**
73 080 166	SW2,5	3,15	**175**	M5x6	3,67	**001**
73 080 173	SW2,5	3,15	**175**	M5x6	3,67	**001**
73 080 167	SW2,5	3,15	**175**	M5x8	4,81	**008**
73 080 174	SW2,5	3,15	**175**	M5x8	4,81	**008**
73 080 175	SW2,5	3,15	**175**	M5x8	4,81	**008**
73 080 168	SW2,5	3,15	**175**	M6x6	4,81	**014**
73 080 169	SW2,5	3,15	**175**	M6x6	4,81	**014**

UltraMini – Quick change tool holder for cutting inserts

Scope of supply:

Tool holder, lock nut and clamping wedge

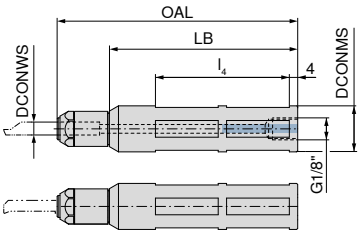

Designation	DCONWS	DCONMS $_{g6}$	OAL	LB	l_4	73 089 ... EUR Y5	
	mm	mm	mm	mm	mm		
UM600H.0012.4	4	12,00	115	90	64	286,50	**124**
UM600H.0016.4	4	16,00	115	90	64	260,00	**164**
UM600H.001905.4	4	19,05	115	90	64	278,50	**194**
UM600H.0020.4	4	20,00	115	90	64	274,40	**204**
UM600H.0022.4	4	22,00	115	90	64	279,70	**224**
UM600H.0025.4	4	25,00	115	90	64	285,20	**254**
UM600H.00254.4	4	25,40	115	90	64	290,50	**264**
UM600H.0028.4	4	28,00	115	90	64	290,50	**284**
UM600H.0012.5	5	12,00	115	90	64	286,50	**125**
UM600H.0016.5	5	16,00	115	90	64	260,00	**165**
UM600H.001905.5	5	19,05	115	90	64	278,50	**195**
UM600H.0020.5	5	20,00	115	90	64	274,40	**205**
UM600H.0022.5	5	22,00	115	90	64	279,70	**225**
UM600H.0025.5	5	25,00	115	90	64	285,20	**255**
UM600H.00254.5	5	25,40	115	90	64	290,50	**265**
UM600H.0028.5	5	28,00	115	90	64	290,50	**285**
UM600H.0012.6	6	12,00	115	90	64	286,50	**126**
UM600H.0016.6	6	16,00	115	90	64	260,00	**166**
UM600H.001905.6	6	19,05	115	90	64	278,50	**196**
UM600H.0020.6	6	20,00	115	90	64	274,40	**206**
UM600H.0022.6	6	22,00	115	90	64	279,70	**226**
UM600H.0025.6	6	25,00	115	90	64	285,20	**256**
UM600H.00254.6	6	25,40	115	90	64	290,50	**266**
UM600H.0028.6	6	28,00	115	90	64	290,50	**286**
UM600H.0012.7	7	12,00	115	90	64	286,50	**127**
UM600H.0016.7	7	16,00	115	90	64	260,00	**167**
UM600H.001905.7	7	19,05	115	90	64	278,50	**197**
UM600H.0020.7	7	20,00	115	90	64	274,40	**207**
UM600H.0022.7	7	22,00	115	90	64	279,70	**227**
UM600H.0025.7	7	25,00	115	90	64	285,20	**257**
UM600H.00254.7	7	25,40	115	90	64	290,50	**267**
UM600H.0028.7	7	28,00	115	90	64	290,50	**287**

Avoid pulling cuts. Ensure a suitable clamping force is used when using thro' coolant supply. Can be tightened using a key.

Spare parts **DCONWS**		Lock nut UM600H 73 950 ... EUR Y5		Clamping wedge UM600H 73 950 ... EUR Y5	
4	M4	64,07	**104**	41,24	**111**
5	M5	64,07	**105**	41,24	**111**
6	M6	64,07	**106**	41,24	**111**
7	M7	64,07	**107**	41,24	**111**

UltraMini – Toolholder for inserts

▲ single ended

Scope of supply:

Tool holder with allen key



Designation	DCONWS	HDD	DCONMS	OAL	l_4	H		73 081 ... EUR Y5	
	mm	mm	mm	mm	mm	mm			
640.0012-D	4	16	12	75	53	10,2		156,40	**264**
650.0012-D	5	16	12	75	53	10,2		156,40	**265**
660.0012-D	6	16	12	75	53	10,2		156,40	**266**
670.0012-D	7	16	12	75	53	10,2		156,40	**267**
680.0012-D	8	16	12	75	53	10,2		156,40	**268**

Key I

Clamping screw

Spare parts DCONWS	70 950 ...	EUR 2A/28		73 082 ...	EUR Y5	
4	SW2,5	3,15	**175**	M5x0,5x6	3,74	**010**
5	SW2,5	3,15	**175**	M5x0,5x6	3,74	**010**
6	SW2,5	3,15	**175**	M5x0,5x6	3,74	**010**
7	SW2,5	3,15	**175**	M5x0,5x6	3,74	**010**
8	SW2,5	3,15	**175**	M5x0,5x6	3,74	**010**

UltraMini – Toolholder for inserts

Scope of supply:

Tool holder with allen key

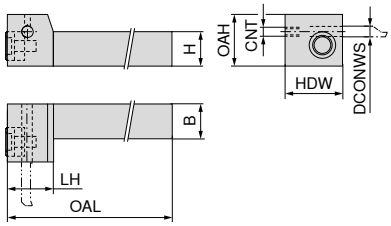



ISO designation	DCONWS	OAL	LH	B	HDW	H	OAH	CNT	Left-hand 73 083 ... EUR Y5		Right-hand 73 084 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm					
R/L .IK.UHCM.1212.4	4	90	17	12	20	12	18	M5	198,90	**124**	198,90	**124**
R/L .IK.UHCM.1212.5	5	90	17	12	20	12	18	M5	198,90	**125**	198,90	**125**
R/L .IK.UHCM.1212.6	6	90	17	12	20	12	21	M5	198,90	**126**	198,90	**126**
R/L .IK.UHCM.1212.7	7	90	17	12	20	12	21	M5	198,90	**127**	198,90	**127**

Suitable coolant connections can be found in our sliding head tooling catalogue.

Clamping key – T

Clamping screw

Spare parts DCONWS		80 397 ... EUR Y7			73 082 ... EUR Y5	
4	SW5	5,46	**050**	UM 12	34,08	**011**
5	SW5	5,46	**050**	UM 12	34,08	**011**
6	SW5	5,46	**050**	UM 16	34,08	**012**
7	SW5	5,46	**050**	UM 16	34,08	**012**

UltraMini – Toolholder for inserts

Scope of supply:

Tool holder with allen key

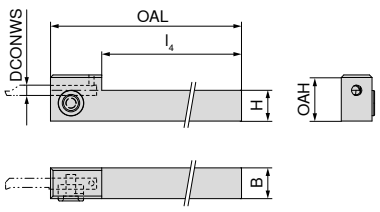

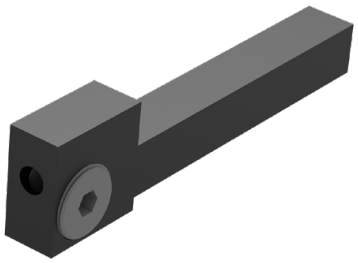

Designation	DCONWS	OAL	l_4	B	H	OAH	73 086 ... EUR Y5	
	mm	mm	mm	mm	mm	mm		
UM.1010.4	4	100	75	10	10	20	198,90	**104**
UM.1010.5	5	100	75	10	10	20	198,90	**105**
UM.1212.4	4	100	75	12	12	22	198,90	**124**
UM.1212.5	5	100	75	12	12	22	198,90	**125**
UM.1212.6	6	100	75	12	12	22	198,90	**126**

Clamping key – T

Clamping screw

Spare parts DCONWS		80 397 ... EUR Y7			73 082 ... EUR Y5	
4	SW5	5,46	**050**	UM 12	34,08	**011**
5	SW5	5,46	**050**	UM 12	34,08	**011**
6	SW5	5,46	**050**	UM 16	34,08	**012**

MiniCut – Insert for turning and profiling

CWX500 CWX500





Illustrations show right-hand versions

Size	ISO designation	DMIN	CW	W1	PDY	S1	RE	PDPT	PSIR	RA	Left-hand 73 324 ... EUR Y5		Right-hand 73 322 ... EUR Y5	
		mm	mm	mm	mm	mm	mm	mm	°	°				
08	8,00. R/L .3,30.18°	7,8	3,3	3,5	4,65	6,0	0,20	0,6	18	8	22,59	033	22,59	033
	8,00. R/L .3,50.18°	7,8	3,5	3,5	4,65	6,0	0,05	0,6	18	8	26,43	035	26,43	035
	8,00. R/L .3,50.20°	7,8	3,5	3,5	4,65	6,0	0,20	0,6	20	20	25,57	135	25,57	135
09	9,00. R/L .3,60.18°	9,0	3,6	3,6	5,50	6,2	0,20	0,8	18	8	23,03	136	23,03	136
	9,00. R/L .3,60.20°	9,0	3,6	3,6	5,50	6,2	0,20	0,8	20	20	26,01	236	26,01	236
11	9,80. R/L .3,90.18°	9,8	3,9	4,2	5,50	8,0	0,20	1,0	18	8	22,59	139	22,59	139
	11,00. R/L .3,90.18°	11,0	3,9	4,2	6,70	8,0	0,20	1,0	18	8	22,02	339	22,02	339
	11,00. R/L .4,20.20°	11,0	4,2	4,2	6,70	8,0	0,20	1,0	20	20	26,01	342	26,01	342
14	14,00. R/L .5,00.18°	13,8	5,0	5,1	8,70	9,0	0,20	1,5	18	8	22,02	550	22,02	550
	14,00. R/L .5,30.20°	14,0	5,3	5,3	8,70	9,0	0,20	1,5	20	20	26,01	553	26,01	553
16	15,50. R/L .5,00.18°	15,5	5,0	5,4	9,70	11,0	0,20	1,5	18	8	24,01	750	24,01	750
P											●		●	
M											●		●	
K											●		●	
N											●		●	
S											●		●	
H											●		●	
O											●		●	

→ v_c Page 59

MiniCut – Insert for copy turning

▲ with chip breaker

CWX500 CWX500





Illustrations show right-hand versions

Size	ISO designation	DMIN	CW	W1	PDY	S1	RE	PDPT	PSIR	Left-hand 73 388 ... EUR Y5		Right-hand 73 386 ... EUR Y5	
		mm	mm	mm	mm	mm	mm	mm	°				
08	8,00. R/L .3,40.10°	8	3,4	3,5	4,65	6,0	0,2	0,5	10	26,01	13400	26,01	13400
09	9,00. R/L .3,50.10°	9	3,5	3,6	5,50	6,2	0,2	0,5	10	26,01	136	26,01	136
11	11,00. R .4,10.10°	11	4,1	4,2	6,70	8,0	0,2	0,5	10	26,01	14100	26,01	14100
P										●		●	
M										●		●	
K										●		●	
N										●		●	
S										●		●	
H										●		●	
O										●		●	

→ v_c Page 59

12

MiniCut – CBN insert for profiling – hard turning

▲ 56 to 65 HRC





Illustrations show right-hand versions

Size	ISO designation	DMIN mm	CW mm	W1 mm	PDY mm	S1 mm	RE mm	PDPT mm	PSIR °	RA °	Left-hand CBN 73 368 ... EUR Y5		Right-hand CBN 73 366 ... EUR Y5	
08	8,00. R/L .3,30.18°	7,8	3,3	3,5	4,65	6	0,2	0,39	18	8	105,90	033	105,90	033
11	11,00. R/L .3,90.18°	11,0	3,9	4,2	6,70	8	0,2	0,55	18	8	110,80	139	110,80	139
14	14,00. R/L .5,00.18°	13,8	5,0	5,3	8,70	9	0,2	0,69	18	8	117,40	550	117,40	550
16	16,00. R/L .5,00.18°	15,5	5,0	5,4	9,70	11	0,2	0,77	18	8	122,40	750	122,40	750
P														
M														
K														
N														
S												○		○
H												●		●
O														

→ v_c Page 59

MiniCut – Internal turning insert

▲ CDX = ap_{max}

CWX500 CWX500





Illustrations show right-hand versions

Size	ISO designation	DMIN mm	CW mm	PDPT mm	W1 mm	PDY mm	S1 mm	RE mm	CDX mm	Left-hand 73 316 ... EUR Y5		Right-hand 73 314 ... EUR Y5	
08	8,00. R/L .1,50.1,0	8	1,5	1,0	3,3	4,8	6,0	0,2	0,2	22,45	015	22,45	015
	8,00. R/L .2,00.1,0	8	2,0	1,0	3,3	4,8	6,0	0,2	0,2	21,88	020	21,88	020
09	9,00. R/L .1,50.2,0	9	1,5	2,0	3,6	5,5	6,2	0,2	0,2	25,16	115	25,16	115
	9,00. R/L .1,50.3,0	10	1,5	3,0	3,6	6,5	6,2	0,2	0,2	25,16	121	25,16	121
	9,00. R/L .2,00.2,0	9	2,0	2,0	3,6	5,5	6,2	0,2	0,2	22,32	120	22,32	120
	9,00. R/L .2,00.3,0	10	2,0	3,0	3,6	6,5	6,2	0,2	0,2	22,32	122	22,32	122
11	11,00. R/L .1,50.2,3	11	1,5	2,3	4,2	6,7	8,0	0,2	0,2	24,01	315	24,01	315
	11,00. R/L .2,00.2,3	11	2,0	2,3	4,2	6,7	8,0	0,2	0,2	22,59	320	22,59	320
14	14,00. R/L .1,50.4,0	14	1,5	4,0	5,3	9,0	9,0	0,2	0,2	22,02	515	22,02	515
	14,00. R/L .1,50,5,5	16	1,5	5,5	5,2	10,5	9,0	0,2	0,2	28,28	516	28,28	516
	14,00. R/L .1,50.6,5	17	1,5	6,5	5,2	11,5	9,0	0,2	0,2	28,28	517	28,28	517
	14,00. R/L .2,00.4,0	14	2,0	4,0	5,3	9,0	9,0	0,2	0,2	22,59	520	22,59	520
	14,00. R/L .2,00.5,5	16	2,0	5,5	5,2	10,5	9,0	0,2	0,2	28,28	521	28,28	521
	14,00. R/L .2,00.6,5	17	2,0	6,5	5,2	11,5	9,0	0,2	0,2	28,28	522	28,28	522
	14,00. R/L .2,50.5,5	16	2,5	5,5	5,2	10,5	9,0	0,2	0,2	28,28	525	28,28	525
	14,00. R/L .2,50.6,5	17	2,5	6,5	5,2	11,5	9,0	0,2	0,2	28,28	526	28,28	526
	14,00. R/L .3,00.5,5	16	3,0	5,5	5,2	10,5	9,0	0,2	0,2	28,28	530	28,28	530
	14,00. R/L .3,00.6,5	17	3,0	6,5	5,2	11,5	9,0	0,2	0,2	28,28	531	28,28	531
16	16,00. R/L .2,00.4,3	16	2,0	4,3	5,4	10,2	11,0	0,2	0,2	24,59	720	24,59	720

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

12

MiniCut – Back boring insert

▲ CDX = ap_{max}





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DMIN mm	PDPT mm	W1 mm	PDX mm	PDY mm	S1 mm	RE mm	CDX mm	Left-hand 73 332 ... EUR Y5		Right-hand 73 330 ... EUR Y5	
08	8,00. R/L .30°.1,3	7,8	1,3	3,50	1,0	4,65	6,0	0,2	0,6	26,15	013	26,15	013
09	9,00. R/L .30°.1,7	9,0	1,7	3,55	1,2	5,50	6,2	0,2	0,8	25,57	117	25,57	117
	9,00. R/L .30°.2,3	10,0	2,3	3,55	1,2	6,50	6,2	0,2	0,8	25,57	123	25,57	123
11	11,00. R/L .30°.2,3	11,0	2,3	4,30	1,6	6,70	8,0	0,2	1,0	25,29	323	25,29	323
14	14,00. R/L .30°.3,5	13,8	3,5	5,40	2,4	8,70	9,0	0,2	1,5	26,15	535	26,15	535
P											●		●
M											●		●
K											●		●
N											●		●
S											●		●
H											●		●
O											●		●

→ v_c Page 59

MiniCut – Internal turning and chamfering insert

▲ CDX = ap_{max}





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DMIN mm	PDPT mm	W1 mm	PDX mm	PDY mm	S1 mm	CRE mm	CDX mm	Left-hand 73 336 ... EUR Y5		Right-hand 73 334 ... EUR Y5	
08	8,00. R/L .45°.1,4	8	1,4	3,50	1,8	4,8	6,0	0,2	0,6	21,60	010	21,60	010
09	9,00. R/L .45°.1,3	9	1,3	3,55	1,8	5,5	6,2	0,2	0,8	21,88	110	21,88	110
11	11,00. R/L .45°.1,5	11	1,5	4,30	2,2	6,7	8,0	0,2	1,0	21,60	310	21,60	310
14	14,00. R/L .45°.1,5	14	1,5	5,40	2,8	9,0	9,0	0,2	1,2	23,30	510	23,30	510
P											●		●
M											●		●
K											●		●
N											●		●
S											●		●
H											●		●
O											●		●

→ v_c Page 59

MiniCut – Insert for pregrooving and chamfering





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DMIN mm	CW mm	PDPT mm	W1 mm	PDY mm	S1 mm	BN mm	Left-hand 73 340 ... EUR Y5		Right-hand 73 338 ... EUR Y5	
08	8,00. R/L .1,00.45°	8	1	1,0	3,3	4,8	6,0	0,2	22,18	100	22,18	100
09	9,00. R/L .1,00.45°	9	1	1,5	3,6	5,5	6,2	0,2	22,59	215	22,59	215
11	11,00. R/L .1,00.45°	11	1	1,5	4,2	6,7	8,0	0,2	22,18	315	22,18	315
14	14,00. R/L .1,00.45°	14	1	1,5	5,3	9,0	9,0	0,2	22,18	515	22,18	515
16	16,00. R/L .1,00.45°	16	1	1,5	5,4	10,2	11,0	0,2	22,18	715	22,18	715
P										●		●
M										●		●
K										●		●
N										●		●
S										●		●
H										●		●
O										●		●

→ v_c Page 59

12

MiniCut – Grooving insert

CWX500 CWX500



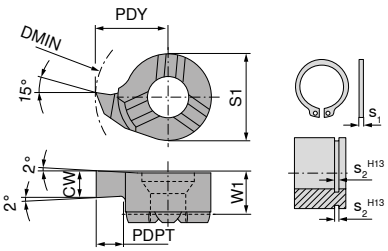

Illustrations show right-hand versions

Size	ISO designation	DMIN	CW	PDPT	W1	s_1	$s_{2\ H13}$	PDY	S1	Left-hand 73 312 ... EUR Y5		Right-hand 73 310 ... EUR Y5	
		mm	mm	mm	mm	mm	mm	mm	mm				
08	8,00. R/L .0,73.1,0	8	0,73	1,0	3,3	0,6	0,7	4,8	6,0	20,18	073	20,18	073
	8,00. R/L .0,83.1,0	8	0,83	1,0	3,3	0,7	0,8	4,8	6,0	20,18	083	20,18	083
	8,00. R/L .0,93.1,0	8	0,93	1,0	3,3	0,8	0,9	4,8	6,0	20,18	093	20,18	093
	8,00. R/L .1,00.1,0	8	1,00	1,0	3,3			4,8	6,0	20,18	110	20,18	110
	8,00. R/L .1,20.1,0	8	1,20	1,0	3,3	1,0	1,1	4,8	6,0	20,18	112	20,18	112
	8,00. R/L .1,40.1,0	8	1,40	1,0	3,3	1,2	1,3	4,8	6,0	20,18	114	20,18	114
	8,00. R/L .1,50.1,0	8	1,50	1,0	3,3			4,8	6,0	20,18	115	20,18	115
	8,00. R/L .1,70.1,0	8	1,70	1,0	3,3	1,5	1,6	4,8	6,0	20,18	117	20,18	117
	8,00. R/L .2,00.1,0	8	2,00	1,0	3,3			4,8	6,0	20,18	120	20,18	120
09	9,00. R/L .0,73.1,2	9	0,73	1,2	3,6	0,6	0,7	5,5	6,2	20,45	173	20,45	173
	9,00. R/L .0,83.1,3	9	0,83	1,3	3,6	0,7	0,8	5,5	6,2	20,45	183	20,45	183
	9,00. R/L .0,93.1,5	9	0,93	1,5	3,6	0,8	0,9	5,5	6,2	20,45	193	20,45	193
	9,00. R/L .1,00.1,8	9	1,00	1,8	3,6			5,5	6,2	20,45	210	20,45	210
	9,00. R/L .1,20.1,8	9	1,20	1,8	3,6	1,0	1,1	5,5	6,2	20,45	212	20,45	212
	9,00. R/L .1,40.1,8	9	1,40	1,8	3,6	1,2	1,3	5,5	6,2	20,45	214	20,45	214
	9,00. R/L .1,50.1,8	9	1,50	1,8	3,6			5,5	6,2	20,45	215	20,45	215
	9,00. R/L .1,70.1,8	9	1,70	1,8	3,6	1,5	1,6	5,5	6,2	20,45	217	20,45	217
	9,00. R/L .2,00.1,8	9	2,00	1,8	3,6			5,5	6,2	20,45	220	20,45	220
	9,00. R/L .2,50.1,8	9	2,50	1,8	3,6			5,5	6,2	20,45	225	20,45	225
	9,00. R/L .3,00.1,8	9	3,00	1,8	3,6			5,5	6,2	20,45	230	20,45	230
11	11,00. R/L .0,73.1,2	11	0,73	1,2	4,2	0,6	0,7	6,7	8,0	20,18	373	20,18	373
	11,00. R/L .0,83.1,3	11	0,83	1,3	4,2	0,7	0,8	6,7	8,0	20,18	383	20,18	383
	11,00. R .0,93.1,5	11	0,93	1,5	4,2	0,9	0,9	6,7	8,0			20,18	393
	11,00. L .0,93.1,5	11	0,93	1,5	4,2	0,8	0,9	6,7	8,0	20,18	393		
	11,00. R/L .1,00.2,3	11	1,00	2,3	4,2			6,7	8,0	20,18	310	20,18	310
	11,00. R/L .1,20.2,3	11	1,20	2,3	4,2	1,0	1,1	6,7	8,0	20,18	312	20,18	312
	11,00. R/L .1,40.2,3	11	1,40	2,3	4,2	1,2	1,3	6,7	8,0	20,18	314	20,18	314
	11,00. R/L .1,50.2,3	11	1,50	2,3	4,2			6,7	8,0	20,18	315	20,18	315
	11,00. R/L .1,70.2,3	11	1,70	2,3	4,2	1,5	1,6	6,7	8,0	20,18	317	20,18	317
	11,00. R/L .2,00.2,3	11	2,00	2,3	4,2			6,7	8,0	20,18	320	20,18	320
	11,00. R/L .2,50.2,3	11	2,50	2,3	4,2			6,7	8,0	20,18	325	20,18	325
	11,00. R/L .3,00.2,3	11	3,00	2,3	4,2			6,7	8,0	20,18	330	20,18	330
14	14,00. R/L .0,73.1,2	14	0,73	1,2	5,3	0,6	0,7	9,0	9,0	20,18	573	20,18	573
	14,00. R/L .0,83.1,3	14	0,83	1,3	5,3	0,7	0,8	9,0	9,0	20,18	583	20,18	583
	14,00. R/L .0,93.1,5	14	0,93	1,5	5,3	0,8	0,9	9,0	9,0	20,18	593	20,18	593
	14,00. R/L .1,20.4,0	14	1,20	4,0	5,3	1,0	1,1	9,0	9,0	20,18	512	20,18	512
	14,00. R/L .1,40.4,0	14	1,40	4,0	5,3	1,2	1,3	9,0	9,0	20,18	514	20,18	514
	14,00. R/L .1,50.4,0	14	1,50	4,0	5,3			9,0	9,0	20,18	515	20,18	515
	14,00. R/L .1,70.4,0	14	1,70	4,0	5,3	1,5	1,6	9,0	9,0	20,18	517	20,18	517
	14,00. R/L .2,00.4,0	14	2,00	4,0	5,3			9,0	9,0	20,18	520	20,18	520
	14,00. R/L .2,50.4,0	14	2,50	4,0	5,3			9,0	9,0	20,18	525	20,18	525
	14,00. R/L .3,00.4,0	14	3,00	4,0	5,3			9,0	9,0	20,18	530	20,18	530
16	16,00. R/L .0,73.1,2	16	0,73	1,2	5,4	0,6	0,7	10,2	11,0	24,45	773	24,45	773
	16,00. R/L .0,83.1,3	16	0,83	1,3	5,4	0,7	0,8	10,2	11,0	24,45	783	24,45	783
	16,00. R/L .0,93.1,5	16	0,93	1,5	5,4	0,8	0,9	10,2	11,0	24,45	793	24,45	793
	16,00. R/L .1,20.4,3	16	1,20	4,3	5,4	1,0	1,1	10,2	11,0	22,18	712	22,18	712
	16,00. R/L .1,40.4,3	16	1,40	4,3	5,4	1,2	1,3	10,2	11,0	22,18	714	22,18	714
	16,00. R/L .1,50.4,3	16	1,50	4,3	5,4			10,2	11,0	22,18	715	22,18	715
	16,00. R/L .1,70.4,3	16	1,70	4,3	5,4	1,5	1,6	10,2	11,0	22,18	717	22,18	717
	16,00. R/L .2,00.4,3	16	2,00	4,3	5,4			10,2	11,0	22,18	720	22,18	720
	16,00. R/L .2,50.4,3	16	2,50	4,3	5,4			10,2	11,0	22,18	725	22,18	725
	16,00. R/L .3,00.4,3	16	3,00	4,3	5,4			10,2	11,0	22,18	730	22,18	730
	16,00. R/L .3,50.4,3	16	3,50	4,3	5,4			10,2	11,0	22,18	735	22,18	735
	16,00. R/L .4,00.4,3	16	4,00	4,3	5,4			10,2	11,0	22,18	740	22,18	740

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

MiniCut – Grooving insert

▲ large groove depth ($T_{max.}$ 5.5 mm)

CWX500 CWX500





Illustrations show right-hand versions

Size	ISO designation	DMIN mm	CW mm	PDPT mm	W1 mm	PDY mm	S1 mm	Left-hand 73 372 ... EUR Y5		Right-hand 73 370 ... EUR Y5	
14	14,00. R/L .1,50.5,5	16	1,5	5,5	5,2	10,5	9	23,30	715	23,30	715
	14,00. R/L .2,00.5,5	16	2,0	5,5	5,2	10,5	9	23,30	720	23,30	720
	14,00. R/L .2,50.5,5	16	2,5	5,5	5,2	10,5	9	23,30	725	23,30	725
	14,00. R/L .3,00.5,5	16	3,0	5,5	5,2	10,5	9	23,30	730	23,30	730

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

MiniCut – Grooving insert

▲ large groove depth ($T_{max.}$ 6.5 mm)

CWX500 CWX500





Illustrations show right-hand versions

Size	ISO designation	DMIN mm	CW mm	PDPT mm	W1 mm	PDY mm	S1 mm	Left-hand 73 384 ... EUR Y5		Right-hand 73 382 ... EUR Y5	
14	14,00. R/L .1,50.6,5	17	1,5	6,5	5,2	11,5	9	23,30	515	23,30	515
	14,00. R/L .2,00.6,5	17	2,0	6,5	5,2	11,5	9	23,30	520	23,30	520
	14,00. R/L .2,50.6,5	17	2,5	6,5	5,2	11,5	9	23,30	525	23,30	525
	14,00. R/L .3,00.6,5	17	3,0	6,5	5,2	11,5	9	23,30	530	23,30	530

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

12

MiniCut – Internal undercut insert

▲ CDX = ap_{max}





CWX500

CWX500

Illustrations show right-hand versions

Size	ISO designation	DMIN mm	PDPT mm	W1 mm	PDY mm	S1 mm	RE mm	CDX mm	PSIR °	RA °	Left-hand 73 328 ... EUR Y5		Right-hand 73 326 ... EUR Y5	
08	8,00. R/L .30°.1,0	7,8	1,0	3,5	4,65	6,0	0,2	0,4	30	3	26,29	010	26,29	010
	8,00. R/L .47°.1,2	7,8	1,2	3,5	4,65	6,0	0,2	0,4	47	3	22,73	012	22,73	012
09	9,00. R/L .47°.1,5	9,0	1,5	3,6	5,50	6,2	0,2	0,5	47	3	22,59	115	22,59	115
11	11,00. R/L .30°.2,3	11,0	2,3	4,2	6,70	8,0	0,2	0,6	30	3	25,57	423	25,57	423
	11,00. R/L .47°.2,3	11,0	2,3	4,2	6,70	8,0	0,2	0,6	47	3	22,18	323	22,18	323
14	13,70. R/L .47°.3,0	13,7	3,0	5,3	8,70	9,0	0,2	0,8	47	3	22,73	530	22,73	530
	13,70. R/L .30°.4,0	13,7	4,0	5,3	8,70	9,0	0,2	0,8	30	3	26,29	540	26,29	540
16	15,80. R/L .30°.4,3	15,8	4,3	5,4	10,20	11,0	0,2	1,0	30	3	28,85	744	28,85	744
P												●		●
M												●		●
K												●		●
N												●		●
S												●		●
H												●		●
O												●		●

→ v_c Page 59

MiniCut – Full radius grooving and turning insert





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DMIN mm	CW mm	PDPT mm	W1 mm	PDY mm	S1 mm	CRE mm	Left-hand 73 320 ... EUR Y5		Right-hand 73 318 ... EUR Y5	
08	8,00. R/L .0,80.1,0	8	0,8	1,0	3,3	4,8	6,0	0,4	23,88	008	23,88	008
	8,00. R/L .1,20.1,0	8	1,2	1,0	3,3	4,8	6,0	0,6	23,88	012	23,88	012
	8,00. R/L .1,80.1,0	8	1,8	1,0	3,3	4,8	6,0	0,9	23,88	018	23,88	018
	8,00. R/L .2,00.1,0	8	2,0	1,0	3,3	4,8	6,0	1,0	24,28	020	24,28	020
09	9,00. R/L .0,80.1,6	9	0,8	1,6	3,6	5,5	6,2	0,4	25,16	108	25,16	108
	9,00. R/L .1,20.1,6	9	1,2	1,6	3,6	5,5	6,2	0,6	25,16	112	25,16	112
	9,00. R/L .1,80.1,6	9	1,8	1,6	3,6	5,5	6,2	0,9	25,16	118	25,16	118
	9,00. R/L .2,00.1,6	9	2,0	1,6	3,6	5,5	6,2	1,0	25,16	120	25,16	120
11	11,00. R/L .0,80.2,3	11	0,8	2,3	4,2	6,7	8,0	0,4	24,59	308	24,59	308
	11,00. R/L .1,20.2,3	11	1,2	2,3	4,2	6,7	8,0	0,6	24,59	312	24,59	312
	11,00. R/L .1,60.2,3	11	1,6	2,3	4,2	6,7	8,0	0,8	25,16	316	25,16	316
	11,00. R/L .1,80.2,3	11	1,8	2,3	4,2	6,7	8,0	0,9	24,59	318	24,59	318
	11,00. R/L .2,00.2,3	11	2,0	2,3	4,2	6,7	8,0	1,0	24,59	320	24,59	320
	11,00. R/L .2,40.2,3	11	2,4	2,3	4,2	6,7	8,0	1,2	25,16	324	25,16	324
	11,00. R/L .3,00.2,3	11	3,0	2,3	4,2	6,7	8,0	1,5	24,59	330	24,59	330
14	14,00. R/L .0,80.4,0	14	0,8	4,0	5,3	9,0	9,0	0,4	26,15	508	26,15	508
	14,00. R/L .1,20.4,0	14	1,2	4,0	5,3	9,0	9,0	0,6	25,72	512	25,72	512
	14,00. R/L .1,80.4,0	14	1,8	4,0	5,3	9,0	9,0	0,9	25,72	518	25,72	518
	14,00. R/L .2,00.4,0	14	2,0	4,0	5,3	9,0	9,0	1,0	25,72	520	25,72	520
	14,00. R/L .2,20.4,0	14	2,2	4,0	5,3	9,0	9,0	1,1	25,72	522	25,72	522
	14,00. R/L .3,00.4,0	14	3,0	4,0	5,3	9,0	9,0	1,5	25,72	530	25,72	530
16	16,00. R/L .1,60.4,3	16	1,6	4,3	5,4	10,2	11,0	0,8	26,86	716	26,86	716
	16,00. R/L .1,80.4,3	16	1,8	4,3	5,4	10,2	11,0	0,9	26,43	718	26,43	718
	16,00. R/L .2,00.4,3	16	2,0	4,3	5,4	10,2	11,0	1,0	26,86	720	26,86	720
	16,00. R/L .2,20.4,3	16	2,2	4,3	5,4	10,2	11,0	1,1	26,43	722	26,43	722
	16,00. R/L .2,40.4,3	16	2,4	4,3	5,4	10,2	11,0	1,2	26,86	724	26,86	724
	16,00. R/L .3,00.4,3	16	3,0	4,3	5,4	10,2	11,0	1,5	26,43	730	26,43	730
	16,00. R/L .3,20.4,3	16	3,2	4,3	5,4	10,2	11,0	1,6	26,86	732	26,86	732
	16,00. R/L .4,00.4,3	16	4,0	4,3	5,4	10,2	11,0	2,0	26,43	740	26,43	740
P									●		●	
M									●		●	
K									●		●	
N									●		●	
S									●		●	
H									●		●	
O									●		●	

→ v_c Page 59

12

MiniCut – Threading insert (Partial profile)




Illustrations show right-hand versions

Size	ISO designation	DMIN mm	TP mm	CF mm	PDPT mm	W1 mm	PDX mm	PDY mm	S1 mm	Left-hand 73 344 ... EUR Y5		Right-hand 73 342 ... EUR Y5	
08	8,00. R/L .0,5/0,75.60°	8	0,5 - 0,75	0,06	0,43	3,50	2,7	4,8	6,0	26,43	012	26,43	012
	8,00. R/L .1,0/1,25.60°	8	1,0 - 1,25	0,12	0,70	3,50	2,7	4,8	6,0	26,43	014	26,43	014
	8,00. R/L .1,5/1,75.60°	8	1,5 - 1,75	0,18	0,95	3,50	2,5	4,8	6,0	26,43	010	26,43	010
09	9,00. R/L .0,5/0,75.60°	9	0,5 - 0,75	0,06	0,27	3,55	3,2	5,5	6,2	26,86	112	26,86	112
	9,00. R/L .1,0/1,25.60°	9	1,0 - 1,25	0,12	0,54	3,55	3,0	5,5	6,2	26,86	114	26,86	114
	9,00. R/L .1,5/1,75.60°	9	1,5 - 1,75	0,18	0,81	3,55	2,8	5,5	6,2	26,86	116	26,86	116
	9,00. R/L .1,75/2,0.60°	9	1,75 - 2,0	0,20	0,95	3,55	2,6	5,5	6,2	26,86	118	26,86	118
	9,00. R/L .2,0/2,5.60°	9	2,0 - 2,5	0,25	1,08	3,55	2,5	5,5	6,2	26,86	120	26,86	120
	9,00. R/L .2,5/3,0.60°	9	2,5 - 3,0	0,31	1,35	3,55	2,1	5,5	6,2	26,86	122	26,86	122
	9,00. R/L .3,0/3,5.60°	9	3,0 - 3,5	0,37	1,62	3,55	1,9	5,5	6,2	26,86	124	26,86	124
11	11,00. R/L .0,5/0,75.60°	11	0,5 - 0,75	0,06	0,75	4,30	3,5	6,7	8,0	26,43	312	26,43	312
	11,00. R/L .1,0/1,25.60°	11	1,0 - 1,25	0,12	0,55	4,30	3,5	6,7	8,0	26,43	314	26,43	314
	11,00. R/L .1,5/1,75.60°	11	1,5 - 1,75	0,18	0,81	4,30	3,5	6,7	8,0	26,43	316	26,43	316
	11,00. R/L .2,0/2,5.60°	11	2,0 - 2,5	0,25	1,08	4,30	3,0	6,7	8,0	26,43	310	26,43	310
	11,00. R/L .2,5/3,0.60°	11	2,5 - 3,0	0,31	1,35	4,30	3,0	6,7	8,0	26,43	320	26,43	320
14	14,00. R/L .1,0/1,25.60°	14	1,0 - 1,25	0,12	0,55	5,40	4,7	9,0	9,0	26,43	512	26,43	512
	14,00. R/L .1,5/1,75.60°	14	1,5 - 1,75	0,18	0,81	5,40	4,5	9,0	9,0	26,43	514	26,43	514
	14,00. R/L .2,0/2,5.60°	14	2,0 - 2,5	0,25	1,08	5,40	4,2	9,0	9,0	26,43	510	26,43	510
	14,00. R/L .2,5/3,0.60°	14	2,5 - 3,0	0,31	1,35	5,40	4,7	9,0	9,0	26,43	520	26,43	520
16	16,00. R/L .1,0/1,25.60°	16	1,0 - 1,25	0,12	0,55	5,50	4,7	10,2	11,0	26,43	712	26,43	712
	16,00. R/L .1,5/1,75.60°	16	1,5 - 1,75	0,18	0,81	5,50	4,5	10,2	11,0	26,43	714	26,43	714
	16,00. R/L .2,0/2,5.60°	16	2,0 - 2,5	0,25	1,08	5,50	4,2	10,2	11,0	26,43	716	26,43	716
	16,00. R/L .2,5/3,0.60°	16	2,5 - 3,0	0,31	1,35	5,50	4,2	10,2	11,0	26,43	710	26,43	710
P										●		●	
M										●		●	
K										●		●	
N										●		●	
S										●		●	
H										●		●	
O										●		●	

→ v_c Page 59

MiniCut – Threading insert (Full profile)







Illustrations show right-hand versions

Size	ISO designation	DMIN mm	TP mm	CF mm	PDPT mm	W1 mm	PDX mm	PDY mm	S1 mm	Left-hand 73 348 ... EUR Y5		Right-hand 73 346 ... EUR Y5	
09	9,00. R/L .0,5.60°	9	0,50	0,06	0,27	3,55	3,25	5,5	6,2	29,97	405	29,97	405
	9,00. R/L .1,0.60°	9	1,00	0,12	0,54	3,55	3,00	5,5	6,2	29,97	410	29,97	410
	9,00. R/L .1,5.60°	9	1,50	0,18	0,81	3,55	2,80	5,5	6,2	29,97	415	29,97	415
	9,00. R/L .1,75.60°	9	1,75	0,20	0,95	3,55	2,70	5,5	6,2	29,97	418	29,97	418
	9,00. R/L .2,0.60°	9	2,00	0,25	1,08	3,55	2,60	5,5	6,2	29,97	420	29,97	420
	9,00. R/L .2,5.60°	9	2,50	0,31	1,35	3,55	2,50	5,5	6,2	29,97	425	29,97	425
	9,00. R/L .3,0.60°	9	3,00	0,37	1,62	3,55	2,20	5,5	6,2	29,97	430	29,97	430
11	11,00. R/L .1,0.60°	11	1,00	0,12	0,54	4,30	3,50	6,7	8,0	29,41	314	29,41	314
	11,00. R/L .1,5.60°	11	1,50	0,18	0,81	4,30	3,50	6,7	8,0	29,41	316	29,41	316
	11,00. R/L .2,0.60°	11	2,00	0,25	1,08	4,30	3,20	6,7	8,0	29,41	310	29,41	310
	11,00. R/L .2,5.60°	11	2,50	0,31	1,35	4,30	3,00	6,7	8,0	29,41	320	29,41	320
	11,00. R/L .3,0.60°	11	3,00	0,37	1,62	4,30	2,90	6,7	8,0	29,41	330	29,41	330
14	14,00. R/L .0,5.60°	14	0,50	0,06	0,27	5,40	3,50	9,0	9,0	30,56	510	30,56	510
	14,00. R/L .1,0.60°	14	1,00	0,12	0,54	5,40	3,50	9,0	9,0	27,13	512	27,13	512
	14,00. R/L .1,5.60°	14	1,50	0,18	0,81	5,40	3,30	9,0	9,0	27,13	514	27,13	514
	14,00. R/L .2,0.60°	14	2,00	0,25	1,08	5,40	4,20	9,0	9,0	27,13	610	27,13	610
	14,00. R/L .2,5.60°	14	2,50	0,31	1,35	5,40	4,70	9,0	9,0	27,13	520	27,13	520
16	16,00. R/L .1,0.60°	16	1,00	0,12	0,54	5,50	4,70	10,2	11,0	32,83	712	32,83	712
	16,00. R/L .1,5.60°	16	1,50	0,18	0,81	5,50	4,50	10,2	11,0	32,83	714	32,83	714
	16,00. R/L .2,0.60°	16	2,00	0,25	1,08	5,50	4,20	10,2	11,0	32,83	716	32,83	716
	16,00. R/L .2,5.60°	16	2,50	0,31	1,35	5,50	4,20	10,2	11,0	32,83	710	32,83	710
	16,00. R/L .3,0.60°	16	3,00	0,37	1,62	5,50	4,00	10,2	11,0	32,83	720	32,83	720
	16,00. R/L .3,5.60°	16	3,50	0,43	1,89	5,50	3,80	10,2	11,0	32,83	730	32,83	730
	16,00. R/L .4,0.60°	16	4,00	0,50	2,16	5,50	3,60	10,2	11,0	32,83	740	32,83	740

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

12

MiniCut – Threading insert (Full profile)




Illustrations show right-hand versions

Size	ISO designation	DMIN mm	TP mm	TPI 1/"	PDPT mm	W1 mm	PDX mm	PDY mm	S1 mm	RE mm	Left-hand 73 352 ... EUR Y5		Right-hand 73 350 ... EUR Y5	
11	11,00. R/L .1,814.55°	11	1,814	14	1,16	4,30	3,0	6,7	8	0,24	39,08	306	39,08	306
	11,00. R/L .1,337.55°	11	1,337	19	0,85	4,30	2,7	6,7	8	0,18	39,08	304	39,08	304
14	14,00. R/L .1,814.55°	14	1,814	14	1,16	5,35	3,6	9,0	9	0,24	39,08	506	39,08	506
	14,00. R/L .1,337.55°	14	1,337	19	0,85	5,35	3,8	9,0	9	0,18	39,08	504	39,08	504
16	16,00. R/L .2,309.55°	16	2,309	11	1,48	5,50	3,5	10,2	11	0,31	41,79	708	41,79	708
	16,00. R/L .1,814.55°	16	1,814	14	1,16	5,50	3,9	10,2	11	0,24	41,79	706	41,79	706
P											●		●	
M											●		●	
K											●		●	
N											●		●	
S											●		●	
H											●		●	
O											●		●	

→ v_c Page 59

MiniCut – Threading insert (Partial profile)

▲ Trapezoidal thread DIN 103





Illustrations show right-hand versions

Size	ISO designation	DMIN mm	TP mm	CF mm	PDPT mm	W1 mm	PDX mm	PDY mm	S1 mm	Left-hand 73 356 ... EUR Y5		Right-hand 73 354 ... EUR Y5	
09	9,00. R/L .1,5.30°	9	1,5	0,47	0,90	3,55	3,00	5,5	6,2	27,70	415	27,70	415
	9,00. R/L .2,0.30°	9	2,0	0,60	1,25	3,55	2,85	5,5	6,2	27,70	420	27,70	420
	9,00. R/L .3,0.30°	9	3,0	0,96	1,75	3,55	2,25	5,5	6,2	27,70	430	27,70	430
	9,00. R/L .4,0.30°	10	4,0	1,33	2,25	3,55	2,25	5,5	6,2	27,70	440	27,70	440
11	11,00. R/L .1,5.30°	11	1,5	0,47	0,90	4,30	3,70	6,7	8,0	27,27	315	27,27	315
	11,00. R/L .2,0.30°	11	2,0	0,60	1,25	4,30	3,50	6,7	8,0	27,27	320	27,27	320
	11,00. R/L .3,0.30°	11	3,0	0,96	1,75	4,30	3,20	6,7	8,0	27,27	330	27,27	330
	11,00. R/L .4,0.30°	11	4,0	1,33	2,25	3,95	2,60	6,7	8,0	26,43	340	26,43	340
14	14,00. R/L .2,0.30°	14	2,0	0,60	1,25	5,30	4,30	9,0	9,0	27,27	520	27,27	520
	14,00. R/L .3,0.30°	14	3,0	0,96	1,75	5,30	4,00	9,0	9,0	27,27	530	27,27	530
	14,00. R/L .4,0.30°	14	4,0	1,33	2,25	5,30	3,60	9,0	9,0	27,27	540	27,27	540
	14,00. R/L .5,0.30°	14	5,0	1,69	2,75	5,30	3,30	9,0	9,0	27,27	550	27,27	550
16	16,00. R/L .2,0.30°	16	2,0	0,60	1,25	5,50	4,50	9,7	11,0	31,14	720	31,14	720
	16,00. R/L .3,0.30°	16	3,0	0,96	1,75	5,50	4,30	9,7	11,0	31,14	730	31,14	730
	16,00. R/L .4,0.30°	16	4,0	1,33	2,25	5,50	4,00	9,7	11,0	31,14	740	31,14	740
	16,00. R/L .5,0.30°	16	5,0	1,69	2,75	5,50	3,55	9,7	11,0	30,12	750	30,12	750
	16,00. R/L .6,0.30°	16	6,0	1,92	3,50	5,50	3,30	10,2	11,0	32,83	760	32,83	760
P											●		●
M											●		●
K											●		●
N											●		●
S											●		●
H											●		●
O											●		●

→ v_c Page 59

12

MiniCut – Axial grooving insert





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DAXN mm	CW mm	PDPT mm	W1 mm	PDY mm	RE mm	S1 mm	Left-hand 73 364 ... EUR Y5		Right-hand 73 362 ... EUR Y5	
14	14,00. R/L .1,0.1,5	14	1,0	1,5	8,3	9		9	21,47	510	21,47	510
	14,00. R/L .1,5.2,5	14	1,5	2,5	8,3	9	0,2	9	21,47	515	21,47	515
	14,00. R/L .2,0.3,0	14	2,0	3,0	8,3	9	0,2	9	21,47	520	21,47	520
	14,00. R/L .2,0.5,0	14	2,0	5,0	10,3	9	0,2	9	24,59	620	24,59	620
	14,00. R/L .2,5.3,0	14	2,5	3,0	8,3	9	0,2	9	21,47	525	21,47	525
	14,00. R/L .2,5.5,0	14	2,5	5,0	10,3	9	0,2	9	24,59	625	24,59	625
	14,00. R/L .3,0.3,0	14	3,0	3,0	8,3	9	0,2	9	21,47	530	21,47	530
	14,00. R/L .3,0.5,0	14	3,0	5,0	10,3	9	0,2	9	24,59	630	24,59	630

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

MiniCut – Full radius axial grooving insert





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DAXN mm	CW mm	PDPT mm	W1 mm	PDY mm	CRE mm	S1 mm	Left-hand 73 376 ... EUR Y5		Right-hand 73 374 ... EUR Y5	
14	14,00. R/L . 1,0.1,5	14	1,0	1,5	8,3	9	0,5	9	26,43	510	26,43	510
	14,00. R/L . 1,6.2,5	14	1,6	2,5	8,3	9	0,8	9	26,43	516	26,43	516
	14,00. R/L . 2,0.3,0	14	2,0	3,0	8,3	9	1,0	9	26,43	520	26,43	520
	14,00. R/L . 2,5.3,0	14	2,5	3,0	8,3	9	1,2	9	26,43	525	26,43	525
	14,00. R/L . 3,0.3,0	14	3,0	3,0	8,3	9	1,5	9	26,43	530	26,43	530

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

MiniCut – Axial grooving insert over a spigot





CWX500 CWX500

Illustrations show right-hand versions

Size	ISO designation	DAXN mm	CW mm	PDPT mm	W1 mm	PDY mm	RE mm	S1 mm	Left-hand 73 360 ... EUR Y5		Right-hand 73 358 ... EUR Y5	
14	14/12. R/L .1,0.1,5	12	1,0	1,5	8,3	7,0		9	22,18	310	22,18	310
	14/12. R/L .1,5.2,5	12	1,5	2,5	8,3	7,5	0,2	9	22,59	315	22,59	315
	14/12. R/L .2,0.3,0	12	2,0	3,0	8,3	8,0	0,2	9	22,59	320	22,59	320
	14/12. R/L .2,0.5,0	12	2,0	5,0	10,3	8,0	0,2	9	26,01	420	26,01	420
	14/12. R/L .2,5.3,0	12	2,5	3,0	8,3	8,5	0,2	9	22,59	325	22,59	325
	14/12. R/L .2,5.5,0	12	2,5	5,0	10,3	8,5	0,2	9	26,01	425	26,01	425
	14/12. R/L .3,0.3,0	12	3,0	3,0	8,3	9,0	0,2	9	22,59	330	22,59	330
	14/12. R/L .3,0.5,0	12	3,0	5,0	10,3	9,0	0,2	9	26,01	430	26,01	430

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	●	●
O	●	●

→ v_c Page 59

12

MiniCut – Steel Tool holder

Scope of supply:
Holder with clamping screw

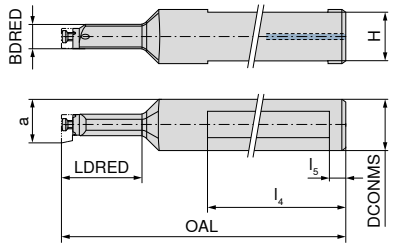

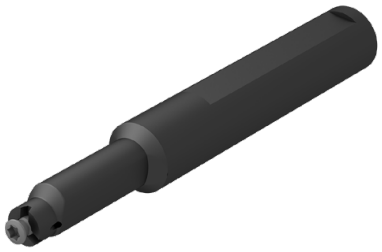

Size	Designation	a	DCONMS	OAL	l_4	LDRED	BDRED	H	l_5	73 522 ... EUR Y5	
		mm	mm	mm	mm	mm	mm	mm	mm		
08	8,00/16.N.12.1,0	7,8	16	80	60	12		15,0	5	105,20	012
	8,00/16.N.22.1,0	7,8	16	90	60	22	7,0	15,0	5	120,60	122
09	9,00/16.N.14.1,8	8,6	16	95	60	14	7,4	15,0	5	106,50	014
	9,00/16.N.25.1,8	8,6	16	105	60	25	7,4	15,0	5	122,10	125
11	11,00/16.N.16.2,3	10,7	16	97	60	16		14,5	5	105,20	016
	11,00/16.N.29.2,3	10,7	16	110	60	29	9,5	14,5	5	120,60	129
14	14,00/16.N.18.4,0	13,8	16	100	60	18	11,0	14,5	5	120,60	018
	14,00/16.N.38.4,0	13,8	16	120	60	38	11,0	14,5	5	120,60	138
16	16,00/16.N.22.4,3	15,7	16	100	60	22		14,5	5	105,20	022
	16,00/16.N.42.4,3	15,7	16	120	60	42	13,5	14,5	5	120,60	142

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			73 082 ... EUR Y5	
08	T08	10,05	110	M2,6	3,97	002
09	T08	10,05	110	M2,6	3,97	002
11	T10	11,78	112	M3,5	3,97	003
14	T15	11,96	113	M4	3,97	004
16	T20	12,83	114	M5	3,97	005

MiniCut – Solid Carbide Tool holder – vibration damped

Scope of supply:
Holder with clamping screw

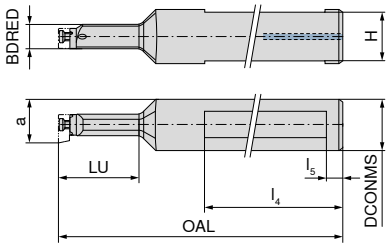

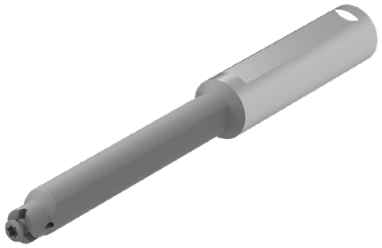

Size	Designation	a	DCONMS	OAL	l_4	LU	BDRED	H	l_5	73 520 ... EUR Y5	
		mm	mm	mm	mm	mm	mm	mm	mm		
08	8,00/12.N.21.1,0 HM	7,8	12	80	50	22,60		11,0	5	173,00	021
	8,00/12.N.30.1,0 HM	7,8	12	90	54	30,80		11,0	5	187,90	030
	8,00/12.N.42.1,0 HM	7,8	12	100	54	42,80		11,0	5	221,80	042
	8,00/12.N.50.1,0 HM	7,8	12	115	48	51,60	7,2	11,0	5	251,50	050
09	9,00/12.N.22.1,0 HM	8,6	12	90	60	23,60	7,4	11,0	5	194,70	222
	9,00/12.N.30.2,0 HM	8,6	12	98	60	30,54	7,4	11,0	5	227,20	230
	9,00/12.N.42.3,0 HM	8,6	12	110	60	43,60	7,4	11,0	5	255,50	242
	9,00/12.N.56.4,0 HM	8,6	12	122	56	57,60	7,4	11,0	5	289,30	256
11	11,00/12.N.29.2,3 HM	10,7	12	95	60	26,40		10,5	5	173,00	129
	11,00/12.N.42.2,3 HM	10,7	12	110	56	42,50		10,5	5	187,90	142
	11,00/12.N.56.2,3 HM	10,7	12	120	56	57,60		10,5	5	221,80	156
	11,00/12.N.64.2,3 HM	10,7	12	130	56	65,60	9,5	10,5	5	251,50	164
14	14,00/12.N.34.4,0 HM	13,8	12	100	59	35,00	11,0	10,5	5	210,90	234
	14,00/12.N.45.4,0 HM	13,8	12	110	59	46,25	11,0	10,5	5	237,80	245
	14,00/12.N.64.4,0 HM	13,8	12	130	60	65,25	11,0	10,5	5	282,70	264
	14,00/16.N.34.4,0 HM	13,8	16	100	59	35,60	11,0	14,5	5	247,40	334
	14,00/16.N.45.4,0 HM	13,8	16	110	56	46,60	11,0	14,5	5	283,90	345
	14,00/16.N.64.4,0 HM	13,8	16	130	59	65,40	11,0	14,5	5	323,10	364
	14,00/16.N.75.4,0 HM	13,8	16	145	56	81,60	11,0	14,5	5	346,10	375
16	16,00/12.N.40.4,3 HM	15,7	12	130	60	41,25		10,5	5	224,50	440
	16,00/12.N.56.4,3 HM	15,7	12	130	60	57,25		10,5	5	237,80	456
	16,00/12.N.80.4,3 HM	15,7	12	150	60	81,06		10,5	5	282,70	480
	16,00/16.N.56.4,3 HM	15,7	16	130	60	57,60		14,5	5	283,90	556
	16,00/16.N.40.4,3 HM	15,7	16	130	60	41,60		14,5	5	283,90	540
	16,00/16.N.80.4,3 HM	15,7	16	150	60	81,60		14,5	5	323,10	580

12

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			73 082 ... EUR Y5	
08	T08	10,05	110	M2,6	3,97	002
09	T08	10,05	110	M2,6	3,97	002
11	T10	11,78	112	M3,5	3,97	003
14	T15	11,96	113	M4	3,97	004
16	T20	12,83	114	M5	3,97	005

MiniCut – HM – Flexoholder

Scope of supply:
Holder with clamping screw



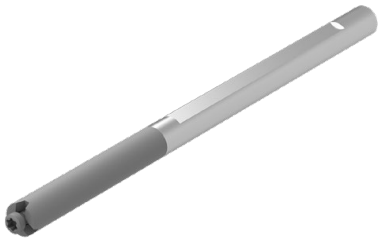

Size	Designation	DCONMS mm	OAL mm	LU mm	a mm	73 525 ... EUR Y5	
08	8,0/6.N16/2	6	65	18	8	274,60	818
	8,0/6.N40/4	6	103	40	8	312,30	840
11	11,0/8.N20/2	8	79	20	11	347,50	120 1)
	11,0/8.N50/4	8	129	50	11	394,80	150 1)

1) with thro' coolant

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			73 082 ... EUR Y5	
08	T08	10,05	110	M2,6	3,97	002
11	T10	11,78	112	M3,5	3,97	003

MiniCut – Base holder for solid carbide Flexoholder

Scope of supply:
Holder with clamping screw

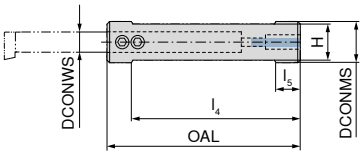

Size	Designation	DCONWS mm	DCONMS mm	H mm	OAL mm	l_4 mm	l_5 mm	73 526 ... EUR Y5	
08	8/16.75	6	16	14	75	55	10	161,70	816
	8/20.75	6	20	18	75	70	10	161,70	820
11	11/16.75	8	16	14	75	55	10	161,70	116
	11/20.75	8	20	18	75	70	10	161,70	120

Key I

Clamping screw

Spare parts for Article no.		70 950 ... EUR 2A/28			73 082 ... EUR Y5	
73 526 816	SW2,5	3,15	175	M5x0,5x6	3,74	010
73 526 820	SW2,5	3,15	175	M5x0,5x6	3,74	010
73 526 116	SW2,5	3,15	175	M5x0,5x4	3,74	009
73 526 120	SW2,5	3,15	175	M5x0,5x6	3,74	010

MiniCut – Steel holder

▲ for axial machining

Scope of supply:
Holder with clamping screw



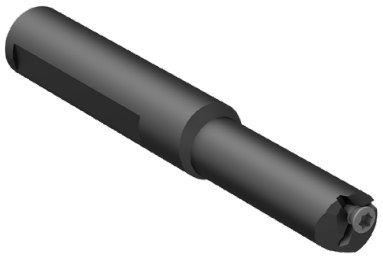

Size	Designation	a mm	DCONMS mm	OAL mm	LDRED mm	Left-hand 73 523 ... EUR Y5		Right-hand 73 524 ... EUR Y5	
14	14,0/16. L .25.1,0	13,5	16	90	25	144,50	025		
	14,0/16. R .25.1,0	13,5	16	90	25			144,50	025
	14,0/16. L .45.1,0	13,5	16	110	45	153,90	145		
	14,0/16. R .45.1,0	13,5	16	110	45			153,90	145

Key D

Clamping screw

Spare parts Size		80 950 ... EUR Y7			73 082 ... EUR Y5	
14	T15	11,96	113	M4	3,97	004

12

SlotCut – Inserts – DIN 138

▲ b_1 = Groove width



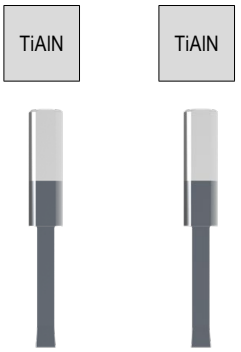

Designation	$b_{1\ P9/JS9}$	CW	HF	RE	OAL	LDRED	DMIN	DCONMS	H	73 601 ... EUR Y5		73 602 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
NPU.0198.01.1	2	1,98	5,5	0,1	38	12,5	6	7	6,3			55,41	**099**
NPU.0200.01.1	2	2,01	5,5	0,1	38	12,5	6	7	6,3	55,41	**099**		
NPU.0298.01.1	3	2,98	6,2	0,1	38	12,5	7	7	6,3			55,41	**100**
NPU.0300.01.1	3	3,01	6,2	0,1	38	12,5	7	7	6,3	55,41	**100**		
NPU.0398.01.1	4	3,98	6,2	0,1	40	15,0	7	7	6,3			53,13	**101**
NPU.0398.02.2	4	3,98	6,2	0,2	50	25,0	7	7	6,3			69,63	**102**
NPU.0400.01.1	4	4,01	6,2	0,1	40	15,0	7	7	6,3	53,13	**101**		
NPU.0400.02.1	4	4,01	6,2	0,2	40	15,0	7	7	6,3	53,13	**102**		
NPU.0400.02.2	4	4,01	6,2	0,2	50	25,0	7	7	6,3	69,63	**103**		
NPU.0498.02.2	5	4,98	5,8	0,2	50	25,0	7	7	6,3			69,63	**103**
NPU.0500.02.2	5	5,01	5,8	0,2	50	25,0	8	7	6,3	69,63	**104**		

Tolerance **JS 9** for 73 601, Tolerance **P 9** for 73 602

SlotCut – Toolholder for broaching inserts

Scope of supply:

Tool holder with clamping screw, without insert

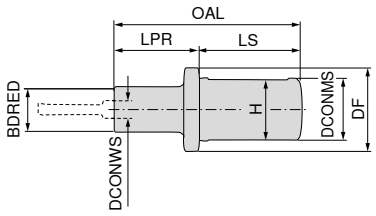

Designation	DCONWS	BDRED	DCONMS	DF	OAL	LS	LPR	H	73 610 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm		
NHU.25	7	18	25	33	73	40	33	23	272,00	**025**
NHU.32	7	20	32	40	73	40	33	30	283,80	**032**

Key I

Clamping screw

Spare parts DCONMS		70 950 ... EUR 2A/28			73 082 ... EUR Y5	
25	SW2,5	3,15	**175**	M5x6	3,67	**001**
32	SW2,5	3,15	**175**	M5x6	3,67	**001**

SlotCut – Inserts – DIN 138

▲ b_1 = Groove width



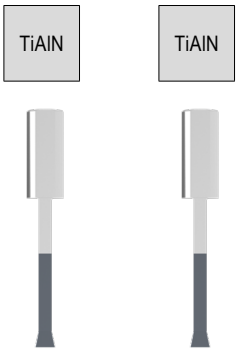

Designation	$b_{1\ JS\ 9/P\ 9}$	CW	HF	RE	OAL	LDRED	DMIN	DCONMS	H	73 607 ...		73 608 ...	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	EUR Y5		EUR Y5	
NP10.398.02.2	4	3,98	9	0,2	50	25	10	10	9,2	77,45	**101**		
NP10.398.02.3	4	3,98	9	0,2	66	41	10	10	9,2	96,91	**102**		
NP10.400.02.2	4	4,01	9	0,2	50	25	10	10	9,2			77,45	**101**
NP10.400.02.3	4	4,01	9	0,2	66	41	10	10	9,2			96,91	**102**
NP10.498.02.2	5	4,98	9	0,2	50	25	10	10	9,2	77,45	**103**		
NP10.498.02.3	5	4,98	9	0,2	66	41	10	10	9,2	96,91	**104**		
NP10.500.02.2	5	5,01	9	0,2	50	25	10	10	9,2			77,45	**103**
NP10.500.02.3	5	5,01	9	0,2	66	41	10	10	9,2			96,91	**104**

Tolerance **P 9** for 73 607, Tolerance **JS 9** for 73 608

SlotCut – Toolholder for Cutting Inserts

Scope of supply:

Tool holder with clamping screw, without insert

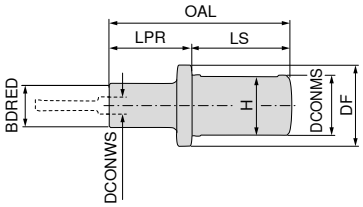

Designation	DCONWS	BDRED	$DCONMS_{g6}$	DF	OAL	LS	LPR	H	73 612 ...	
	mm	mm	mm	mm	mm	mm	mm	mm	EUR Y5	
NH10.0025.1	10	20	25	33	73	40	33	23	272,00	**025**
NH10.0032.1	10	20	32	40	73	40	33	30	272,00	**032**

Spare parts DCONMS		70 950 ... EUR 2A/28			70 950 ... EUR Y5	
25	SW3	3,15	**176**	M6x5,5	4,35	**031**
32	SW3	3,15	**176**	M6x5,5	4,35	**031**

12

SlotCut – Inserts – DIN 138

▲ b_1 = Groove width



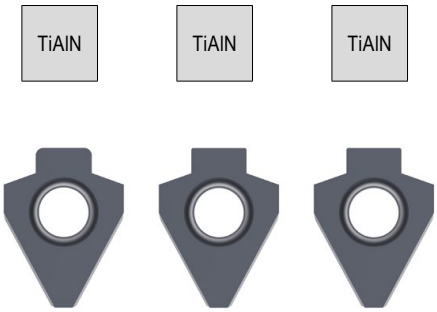

Designation	b_1 P 9/JS 9/C 11	CW	RE	PDY	INSL	PDPT	DMIN	W1	clamping holder	73 603 ... EUR Y5		73 604 ... EUR Y5		73 605 ... EUR Y5	
	mm	mm	mm	mm	mm	mm	mm	mm							
NV15.0398.02	4	3,98	0,20	6,5	13,0	2,3	15	3,2	NHV 15					49,17	110
NV15.0401.02	4	4,01	0,20	6,5	13,0	2,3	15	3,2	NHV 15			49,17	110		
NV15.0410.050	4	4,10	0,50	6,5	13,0	2,2	15	3,2	NHV 15	49,17	108				
NV15.0498.02	5	4,98	0,20	6,5	13,0	2,8	15	3,2	NHV 15					49,17	111
NV15.0501.02	5	5,01	0,20	6,5	13,0	2,8	15	3,2	NHV 15			49,17	111		
NV15.0510.050	5	5,10	0,50	6,5	13,0	2,5	15	3,2	NHV 15	49,17	109				
NV15.0598.02	6	5,98	0,20	6,5	13,0	3,3	15	3,2	NHV 15					49,17	112
NV15.0601.02	6	6,01	0,20	6,5	13,0	3,3	15	3,2	NHV 15			49,17	112		
NV15.0612.085	6	6,12	0,85	6,5	13,0	2,6	15	3,2	NHV 15	49,17	110				
NPV.0498.02	5	4,98	0,20	8,0	17,3	2,7	22	5,3	NHV 22					49,17	100
NPV.0501.02	5	5,01	0,20	8,0	17,3	2,7	22	5,3	NHV 22			49,17	100		
NPV.0598.02	6	5,98	0,20	8,0	17,3	3,4	22	5,3	NHV 22					49,17	101
NPV.0601.02	6	6,01	0,20	8,0	17,3	3,4	22	5,3	NHV 22			49,17	101		
NPV.0612.085	6	6,12	0,85	8,0	17,3	2,6	22	5,3	NHV 22	49,17	101				
NPV.0713.085	7	7,13	0,85	8,0	17,3	3,3	22	5,3	NHV 22	49,17	102				
NPV.0798.02	8	7,98	0,20	8,0	17,3	4,1	22	5,3	NHV 22/30					49,17	102
NPV.0801.02	8	8,01	0,20	8,0	17,3	4,1	22	5,3	NHV 22/30			49,17	102		
NPV.0813.105	8	8,13	1,05	8,0	17,3	3,4	22	5,3	NHV 22/30	49,17	103				
NPV.0998.03	10	9,98	0,30	8,0	17,3	4,2	30	5,3	NHV 30					49,17	103
NPV.1001.03	10	10,01	0,30	8,0	17,3	4,2	30	5,3	NHV 30			49,17	103		
NPV.1013.105	10	10,13	1,05	10,9	20,2	4,2	40	5,3	NHV 38	49,17	104				
NPV.1197.03	12	11,97	0,30	10,9	20,2	5,7	40	5,3	NHV 38					49,17	104
NPV.1202.03	12	12,02	0,30	10,9	20,2	5,7	40	5,3	NHV 38			49,17	104		
NPV.1202.05	20	12,02	0,50	10,9	20,2	8,5	40	5,3	NHV 38			49,17	105		
NPV.1215.135	12	12,15	1,35	10,9	20,2	5,1	40	5,3	NHV 38	49,17	105				
NPV.1215.175	16	12,15	1,75	10,9	20,2	6,6	40	5,3	NHV 38	49,17	106				
NPV.1215.225	24	12,15	2,25	10,9	20,2	8,5	40	5,3	NHV 38	49,17	107				
NPV.1397.03	14	13,97	0,30	10,9	20,1	7,5	45	5,3	NHV 45					55,70	106
NPV.1402.03	14	14,02	0,30	10,9	20,1	7,5	45	5,3	NHV 45			55,70	106		
NPV.1597.03	16	15,97	0,30	10,9	20,1	7,5	45	5,3	NHV 45					55,70	107
NPV.1602.03	16	16,02	0,30	10,9	20,1	7,5	45	5,3	NHV 45			55,70	107		
NPV.1797.05	18	17,97	0,50	10,9	20,1	9,5	45	5,3	NHV 45					55,70	108
NPV.1802.05	18	18,02	0,50	10,9	20,1	9,5	45	5,3	NHV 45			55,70	108		
NPV.1997.05	20	19,97	0,50	10,9	20,1	10,0	45	5,3	NHV 45					55,70	109
NPV.2002.05	20	20,02	0,50	10,9	20,1	10,0	45	5,3	NHV 45			55,70	109		

Tolerance **C 11** for 73 603, Tolerance **JS 9** for 73 604, Tolerance **P 9** for 73 605

SlotCut – Toolholder for inserts

Scope of supply:
Tool holder with clamping screw, without insert

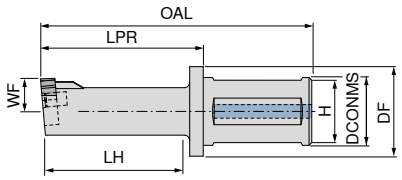

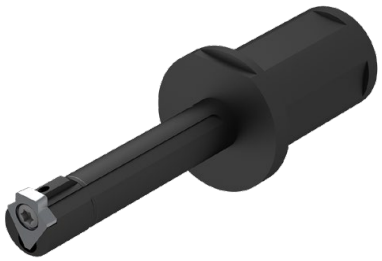

Designation	DCONMS mm	DMIN mm	DF mm	OAL mm	LH mm	LPR mm	H mm	WF mm	73 613 ... EUR Y5	
NHV.15.1	25	15	33	75	25	35	23	8,4	233,30	**025**
NHV.15.2	25	15	33	90	40	50	23	8,4	256,00	**125**
NHV.15.3	25	15	33	110	60	70	23	8,4	291,80	**225**

Key D

Clamping screw

Spare parts DCONMS	80 950 ... EUR Y7		73 950 ... EUR Y5	
25	T15	11,96 **113**	M4x10	8,54 **029**

SlotCut – Toolholder for inserts

Scope of supply:
Tool holder with clamping screw, without insert

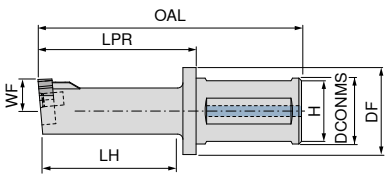

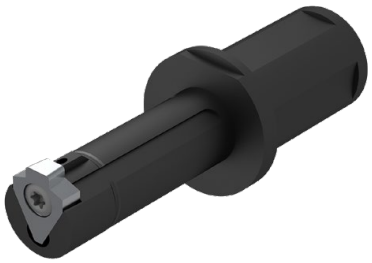

Designation	DCONMS $_{g6}$ mm	DMIN mm	DF mm	OAL mm	LH mm	LPR mm	H mm	WF mm	73 611 ... EUR Y5	
NHV.22	25	22	33	100	50	60	23	12,0	254,70	**025**
NHV.30	32	30	45	100	50	60	30	16,5	254,70	**032**
NHV.30	32	30	45	125	75	85	30	16,5	289,10	**532**
NHV.38	32	38	45	100	50	60	30	22,0	254,70	**132**
NHV.38	32	38	45	125	75	85	30	22,0	289,10	**632**
NHV.45	40	45	55	175	105	115	38	24,0	466,80	**140**
NHV.45	40	45	55	120	50	60	38	24,0	344,80	**040**
NHV.45	40	45	55	225	155	165	38	24,0	526,40	**240**

Key D

Clamping screw

Spare parts DCONMS	80 950 ... EUR Y7		73 082 ... EUR Y5	
25	T20	12,83 **114**	M5x13	5,40 **007**
32	T20	12,83 **114**	M5x13	5,40 **007**
40	T20	12,83 **114**	M5x13	5,40 **007**

12

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values

Index	UltraMini K10F uncoated	UltraMini TiN	UltraMini TiAlN	UltraMini DPX 57S	UltraMini TiAlN+	MiniCut CWX500	MiniCut CBN
	v_c in m/min						
P.1.1		**90**	**110**	110	110	**160**	
P.1.2		**80**	**100**	100	100	**140**	
P.1.3		**60**	**80**	80	80	**140**	
P.1.4		**60**	**80**	80	80	**110**	
P.1.5		**60**	**60**	60	60	**100**	
P.2.1		**60**	**80**	80	80	**110**	
P.2.2		**60**	**60**	60	60	**100**	
P.2.3		**50**	**60**	60	60	**90**	
P.2.4		**50**	**60**	60	60	**80**	
P.3.1		**50**	**60**	60	60	**80**	
P.3.2		**30**	**50**	**50**	50	**70**	
P.3.3		**30**	**30**	**30**	30	**50**	
P.4.1		**60**	**70**	**70**	70	**100**	
P.4.2		**50**	**60**	**60**	60	**90**	
M.1.1		**60**	**80**	**80**	80	**80**	
M.2.1		**50**	**60**	**60**	60	**70**	
M.3.1		**40**	**50**	**50**	50	**60**	
K.1.1		**80**	**100**	100	100	**90**	
K.1.2		**60**	**70**	70	70	**100**	
K.2.1		**60**	**60**	60	60	**80**	
K.2.2		**50**	**60**	60	60	**70**	
K.3.1		**80**	**100**	100	100	**120**	
K.3.2		**70**	**80**	80	80	**100**	
N.1.1	100	**200**	**230**	230	230	**290**	
N.1.2	100	**180**	**220**	220	220	**280**	
N.2.1	90	**160**	**190**	190	190	**240**	
N.2.2	70	**140**	**170**	170	170	**200**	
N.2.3	50	**80**	**100**	100	100	**120**	
N.3.1	80	**140**	**170**	170	170	**210**	
N.3.2	70	**120**	**140**	140	140	**180**	
N.3.3	50	**100**	**120**	120	120	**130**	
N.4.1	50	**100**	**120**	120	120	**100**	
S.1.1		30	**50**	50	50	**50**	
S.1.2		30	**30**	30	30	**30**	30
S.2.1		30	**50**	50	50	**50**	50
S.2.2		30	**30**	30	30	**40**	30
S.2.3			**30**	30	30	**30**	30
S.3.1		30	**50**	50	50	**50**	
S.3.2		20	**30**	30	30	**40**	
S.3.3			**20**	20	20	**30**	20
H.1.1		30	**40**	40	**40**	**50**	**40**
H.1.2			30	30	**30**	40	**30**
H.1.3				20	**30**		**30**
H.1.4							
H.2.1							
H.3.1		20	**30**	30	**30**	**40**	**30**
O.1.1	**50**	**90**	**110**	110	110	**150**	
O.1.2	**50**	**100**	**120**	120	120	**150**	
O.2.1		**90**	**110**	110	110	**130**	
O.2.2		**60**	**80**	80	80	**100**	
O.3.1	50	**100**	**120**	120	120	**150**	

	UltraMini	MiniCut
	f in mm/rev.	
Internal turning and profiling	0,02–0,05	0,03–0,10
Internal turning and profiling – hard turning	0,02–0,06	0,03–0,10
Turning and profile turning – super alloys	0,02–0,08	
Internal turning	0,02–0,05	0,01–0,03
Back boring	0,02–0,04	0,03–0,10
Turning and chamfering	0,01–0,03	0,03–0,10
Pre-parting and chamfering	0,01–0,02	0,01–0,03
Groove turning	0,01–0,02	0,01–0,03
Internal Undercuts	0,01–0,03	0,03–0,08
Groove and profile turning	0,01–0,02	0,01–0,03
Axial grooving	0,02–0,05	0,02–0,05

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine.
The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values – 73 000 ... / 73 001 ...

		Roughing										
	UltraMini DPX77S	Ø ≤ 2 mm Corner radius in mm			Ø 2,5–4 mm Corner radius in mm				Ø ≥ 5 mm Corner radius in mm			
Index		0,05	0,1	0,15	0,05	0,1	0,15	0,2 / 0,4	0,05	0,1	0,15	0,2 / 0,4
	v_c in m/min	f in mm/rev.			f in mm/rev.				f in mm/rev.			
P.1.1	110	0,026–0,076	0,029–0,082	0,031–0,088	0,053–0,151	0,058–0,165	0,062–0,176	0,064–0,184	0,099–0,284	0,108–0,309	0,116–0,33	0,121–0,345
P.1.2	100	0,026–0,076	0,029–0,082	0,031–0,088	0,053–0,151	0,058–0,165	0,062–0,176	0,064–0,184	0,099–0,284	0,108–0,309	0,116–0,33	0,121–0,345
P.1.3	80	0,026–0,076	0,029–0,082	0,031–0,088	0,053–0,151	0,058–0,165	0,062–0,176	0,064–0,184	0,099–0,284	0,108–0,309	0,116–0,33	0,121–0,345
P.1.4	80	0,023–0,065	0,025–0,071	0,026–0,076	0,046–0,13	0,05–0,142	0,053–0,151	0,055–0,158	0,085–0,244	0,093–0,266	0,099–0,284	0,104–0,297
P.1.5	60	0,024–0,068	0,026–0,074	0,028–0,079	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166	0,089–0,255	0,097–0,278	0,104–0,297	0,109–0,311
P.2.1	80	0,024–0,068	0,026–0,074	0,028–0,079	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166	0,089–0,255	0,097–0,278	0,104–0,297	0,109–0,311
P.2.2	60	0,021–0,06	0,023–0,066	0,025–0,07	0,042–0,121	0,046–0,132	0,049–0,141	0,052–0,147	0,079–0,227	0,087–0,247	0,092–0,264	0,097–0,276
P.2.3	60	0,019–0,054	0,021–0,059	0,022–0,063	0,038–0,109	0,042–0,119	0,044–0,127	0,046–0,132	0,071–0,204	0,078–0,222	0,083–0,238	0,087–0,248
P.2.4	60	0,018–0,051	0,02–0,056	0,021–0,06	0,036–0,103	0,039–0,112	0,042–0,12	0,044–0,125	0,067–0,193	0,074–0,21	0,079–0,224	0,082–0,235
P.3.1	60	0,021–0,06	0,023–0,066	0,025–0,07	0,042–0,121	0,046–0,132	0,049–0,141	0,052–0,147	0,079–0,227	0,087–0,247	0,092–0,264	0,097–0,276
P.3.2	50	0,02–0,057	0,022–0,063	0,023–0,067	0,04–0,115	0,044–0,125	0,047–0,134	0,049–0,14	0,075–0,215	0,082–0,235	0,088–0,251	0,092–0,262
P.3.3	30	0,016–0,045	0,017–0,049	0,018–0,053	0,032–0,091	0,035–0,099	0,037–0,106	0,039–0,11	0,06–0,17	0,065–0,185	0,069–0,198	0,072–0,207
P.4.1	70	0,022–0,064	0,024–0,069	0,026–0,074	0,044–0,127	0,048–0,138	0,052–0,148	0,054–0,155	0,083–0,238	0,091–0,26	0,097–0,277	0,101–0,29
P.4.2	60	0,021–0,06	0,023–0,066	0,025–0,07	0,042–0,121	0,046–0,132	0,049–0,141	0,052–0,147	0,079–0,227	0,087–0,247	0,092–0,264	0,097–0,276
M.1.1	80	0,015–0,042	0,016–0,046	0,017–0,049	0,03–0,085	0,032–0,092	0,034–0,099	0,036–0,103	0,056–0,159	0,061–0,173	0,065–0,185	0,068–0,193
M.2.1	60	0,013–0,038	0,014–0,041	0,015–0,044	0,026–0,076	0,029–0,082	0,031–0,088	0,032–0,092	0,05–0,142	0,054–0,155	0,058–0,165	0,06–0,173
M.3.1	50	0,014–0,039	0,015–0,043	0,016–0,046	0,028–0,079	0,03–0,086	0,032–0,092	0,033–0,096	0,052–0,147	0,056–0,161	0,06–0,172	0,063–0,179
K.1.1	100	0,026–0,076	0,029–0,082	0,031–0,088	0,053–0,151	0,058–0,165	0,062–0,176	0,064–0,184	0,099–0,284	0,108–0,309	0,116–0,33	0,121–0,345
K.1.2	70	0,024–0,068	0,026–0,074	0,028–0,079	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166	0,089–0,255	0,097–0,278	0,104–0,297	0,109–0,311
K.2.1	60	0,024–0,068	0,026–0,074	0,028–0,079	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166	0,089–0,255	0,097–0,278	0,104–0,297	0,109–0,311
K.2.2	60	0,021–0,059	0,022–0,064	0,024–0,069	0,041–0,118	0,045–0,129	0,048–0,137	0,05–0,144	0,077–0,221	0,084–0,241	0,09–0,257	0,094–0,269
K.3.1	100	0,025–0,073	0,028–0,079	0,03–0,084	0,051–0,145	0,055–0,158	0,059–0,169	0,062–0,177	0,095–0,272	0,104–0,297	0,111–0,317	0,116–0,331
K.3.2	80	0,021–0,06	0,023–0,066	0,025–0,07	0,042–0,121	0,046–0,132	0,049–0,141	0,052–0,147	0,079–0,227	0,087–0,247	0,092–0,264	0,097–0,276
N.1.1	230	0,032–0,091	0,035–0,099	0,037–0,106	0,064–0,181	0,069–0,198	0,074–0,211	0,077–0,221	0,119–0,34	0,13–0,371	0,139–0,396	0,145–0,414
N.1.2	220	0,031–0,089	0,034–0,097	0,036–0,104	0,062–0,178	0,068–0,194	0,073–0,208	0,076–0,217	0,117–0,335	0,128–0,365	0,136–0,389	0,142–0,407
N.2.1	190	0,03–0,085	0,032–0,092	0,034–0,099	0,059–0,169	0,065–0,185	0,069–0,197	0,072–0,206	0,111–0,318	0,121–0,346	0,129–0,37	0,135–0,386
N.2.2	170	0,029–0,083	0,032–0,091	0,034–0,097	0,058–0,166	0,063–0,181	0,068–0,194	0,071–0,202	0,109–0,312	0,119–0,34	0,127–0,363	0,133–0,38
N.2.3	100	0,029–0,082	0,031–0,089	0,033–0,095	0,057–0,163	0,062–0,178	0,067–0,19	0,07–0,199	0,107–0,306	0,117–0,334	0,125–0,356	0,13–0,373
N.3.1	170	0,03–0,085	0,032–0,092	0,034–0,099	0,059–0,169	0,065–0,185	0,069–0,197	0,072–0,206	0,111–0,318	0,121–0,346	0,129–0,37	0,135–0,386
N.3.2	140	0,028–0,08	0,031–0,087	0,033–0,093	0,056–0,16	0,061–0,175	0,065–0,187	0,068–0,195	0,105–0,301	0,115–0,328	0,122–0,35	0,128–0,366
N.3.3	120	0,027–0,077	0,029–0,084	0,031–0,09	0,054–0,154	0,059–0,168	0,063–0,18	0,066–0,188	0,101–0,289	0,11–0,315	0,118–0,337	0,123–0,352
N.4.1	120	0,027–0,077	0,029–0,084	0,031–0,09	0,054–0,154	0,059–0,168	0,063–0,18	0,066–0,188	0,101–0,289	0,11–0,315	0,118–0,337	0,123–0,352
S.1.1	50	0,024–0,068	0,026–0,074	0,028–0,079	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166	0,089–0,255	0,097–0,278	0,104–0,297	0,109–0,311
S.1.2	30	0,019–0,053	0,02–0,058	0,022–0,062	0,037–0,106	0,04–0,115	0,043–0,123	0,045–0,129	0,069–0,198	0,076–0,216	0,081–0,231	0,085–0,242
S.2.1	50	0,018–0,051	0,02–0,056	0,021–0,06	0,036–0,103	0,039–0,112	0,042–0,12	0,044–0,125	0,067–0,193	0,074–0,21	0,079–0,224	0,082–0,235
S.2.2	30	0,014–0,039	0,015–0,043	0,016–0,046	0,028–0,079	0,03–0,086	0,032–0,092	0,033–0,096	0,052–0,147	0,056–0,161	0,06–0,172	0,063–0,179
S.2.3	30	0,015–0,042	0,016–0,046	0,017–0,049	0,03–0,085	0,032–0,092	0,034–0,099	0,036–0,103	0,056–0,159	0,061–0,173	0,065–0,185	0,068–0,193
S.3.1	50	0,024–0,068	0,026–0,074	0,028–0,079	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166	0,089–0,255	0,097–0,278	0,104–0,297	0,109–0,311
S.3.2	30	0,019–0,054	0,021–0,059	0,022–0,063	0,038–0,109	0,042–0,119	0,044–0,127	0,046–0,132	0,071–0,204	0,078–0,222	0,083–0,238	0,087–0,248
S.3.3	20	0,013–0,038	0,014–0,041	0,015–0,044	0,026–0,076	0,029–0,082	0,031–0,088	0,032–0,092	0,05–0,142	0,054–0,155	0,058–0,165	0,06–0,173
H.1.1	40	0,013–0,038	0,014–0,041	0,015–0,044	0,026–0,076	0,029–0,082	0,031–0,088	0,032–0,092	0,05–0,142	0,054–0,155	0,058–0,165	0,06–0,173
H.1.2	30	0,011–0,03	0,012–0,033	0,012–0,035	0,021–0,06	0,023–0,066	0,025–0,07	0,026–0,074	0,036–0,102	0,039–0,111	0,042–0,119	0,043–0,124
H.1.3												
H.1.4												
H.2.1	30	0,014–0,041	0,016–0,044	0,017–0,048	0,029–0,082	0,031–0,089	0,033–0,095	0,035–0,099	0,054–0,153	0,058–0,167	0,062–0,178	0,065–0,186
H.3.1	30	0,013–0,036	0,014–0,04	0,015–0,042	0,025–0,073	0,028–0,079	0,03–0,084	0,031–0,088	0,048–0,136	0,052–0,148	0,055–0,158	0,058–0,166
O.1.1	110	0,031–0,089	0,034–0,097	0,036–0,104	0,062–0,178	0,068–0,194	0,073–0,208	0,076–0,217	0,117–0,335	0,128–0,365	0,136–0,389	0,142–0,407
O.1.2	120	0,028–0,079	0,03–0,086	0,032–0,092	0,055–0,157	0,06–0,171	0,064–0,183	0,067–0,191	0,103–0,295	0,112–0,321	0,12–0,343	0,126–0,359
O.2.1	110	0,017–0,05	0,019–0,054	0,02–0,058	0,035–0,1	0,038–0,109	0,041–0,116	0,043–0,121	0,065–0,187	0,071–0,204	0,076–0,218	0,08–0,228
O.2.2	80	0,017–0,048	0,018–0,053	0,02–0,056	0,034–0,097	0,037–0,105	0,039–0,113	0,041–0,118	0,064–0,181	0,069–0,198	0,074–0,211	0,077–0,221
O.3.1	120											

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine.
The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Index	Finishing												
	Ø ≤ 2 mm Corner radius in mm			Ø 2,5–4 mm Corner radius in mm					Ø ≥ 5 mm Corner radius in mm				
	0,05	0,1	0,15	0,05	0,1	0,15	0,2	0,4	0,05	0,1	0,15	0,2	0,4
	f in mm/rev.			f in mm/rev.					f in mm/rev.				
P.1.1	0,007–0,019	0,008–0,022	0,009–0,025	0,017–0,049	0,02–0,058	0,023–0,065	0,025–0,072	0,032–0,092	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
P.1.2	0,007–0,019	0,008–0,022	0,009–0,025	0,017–0,049	0,02–0,058	0,023–0,065	0,025–0,072	0,032–0,092	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
P.1.3	0,007–0,019	0,008–0,022	0,009–0,025	0,017–0,049	0,02–0,058	0,023–0,065	0,025–0,072	0,032–0,092	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
P.1.4	0,006–0,016	0,007–0,019	0,008–0,022	0,015–0,042	0,017–0,05	0,02–0,056	0,022–0,061	0,028–0,079	0,023–0,065	0,027–0,077	0,03–0,086	0,033–0,095	0,043–0,122
P.1.5	0,006–0,017	0,007–0,02	0,008–0,023	0,016–0,044	0,018–0,052	0,02–0,059	0,023–0,064	0,029–0,083	0,024–0,068	0,028–0,08	0,032–0,09	0,035–0,099	0,045–0,128
P.2.1	0,006–0,017	0,007–0,02	0,008–0,023	0,016–0,044	0,018–0,052	0,02–0,059	0,023–0,064	0,029–0,083	0,024–0,068	0,028–0,08	0,032–0,09	0,035–0,099	0,045–0,128
P.2.2	0,005–0,015	0,006–0,018	0,007–0,02	0,014–0,04	0,016–0,046	0,018–0,052	0,02–0,057	0,026–0,074	0,021–0,061	0,025–0,071	0,028–0,08	0,031–0,088	0,04–0,114
P.2.3	0,005–0,014	0,006–0,016	0,006–0,018	0,012–0,036	0,015–0,042	0,016–0,047	0,018–0,051	0,023–0,066	0,019–0,055	0,022–0,064	0,025–0,072	0,028–0,079	0,036–0,102
P.2.4	0,005–0,013	0,005–0,015	0,006–0,017	0,012–0,034	0,014–0,039	0,015–0,044	0,017–0,049	0,022–0,063	0,018–0,052	0,021–0,061	0,024–0,068	0,026–0,075	0,034–0,097
P.3.1	0,005–0,015	0,006–0,018	0,007–0,02	0,014–0,04	0,016–0,046	0,018–0,052	0,02–0,057	0,026–0,074	0,021–0,061	0,025–0,071	0,028–0,08	0,031–0,088	0,04–0,114
P.3.2	0,005–0,014	0,006–0,017	0,007–0,019	0,013–0,038	0,015–0,044	0,017–0,049	0,019–0,054	0,025–0,07	0,02–0,058	0,024–0,068	0,027–0,076	0,029–0,084	0,038–0,108
P.3.3	0,004–0,011	0,005–0,013	0,005–0,015	0,01–0,03	0,012–0,035	0,014–0,039	0,015–0,043	0,019–0,055	0,016–0,046	0,019–0,053	0,021–0,06	0,023–0,066	0,03–0,085
P.4.1	0,006–0,016	0,007–0,019	0,007–0,021	0,015–0,041	0,017–0,049	0,019–0,055	0,021–0,06	0,027–0,078	0,022–0,064	0,026–0,075	0,029–0,084	0,032–0,092	0,042–0,119
P.4.2	0,005–0,015	0,006–0,018	0,007–0,02	0,014–0,04	0,016–0,046	0,018–0,052	0,02–0,057	0,026–0,074	0,021–0,061	0,025–0,071	0,028–0,08	0,031–0,088	0,04–0,114
M.1.1	0,004–0,011	0,004–0,012	0,005–0,014	0,01–0,028	0,011–0,032	0,013–0,036	0,014–0,04	0,018–0,052	0,015–0,043	0,017–0,05	0,02–0,056	0,022–0,062	0,028–0,08
M.2.1	0,003–0,01	0,004–0,011	0,004–0,013	0,009–0,025	0,01–0,029	0,011–0,033	0,013–0,036	0,016–0,046	0,013–0,038	0,016–0,045	0,018–0,05	0,019–0,055	0,025–0,071
M.3.1	0,003–0,01	0,004–0,012	0,005–0,013	0,009–0,026	0,011–0,03	0,012–0,034	0,013–0,037	0,017–0,048	0,014–0,04	0,016–0,046	0,018–0,052	0,02–0,057	0,026–0,074
K.1.1	0,007–0,019	0,008–0,022	0,009–0,025	0,017–0,049	0,02–0,058	0,023–0,065	0,025–0,072	0,032–0,092	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
K.1.2	0,006–0,017	0,007–0,02	0,008–0,023	0,016–0,044	0,018–0,052	0,02–0,059	0,023–0,064	0,029–0,083	0,024–0,068	0,028–0,08	0,032–0,09	0,035–0,099	0,045–0,128
K.2.1	0,006–0,017	0,007–0,02	0,008–0,023	0,016–0,044	0,018–0,052	0,02–0,059	0,023–0,064	0,029–0,083	0,024–0,068	0,028–0,08	0,032–0,09	0,035–0,099	0,045–0,128
K.2.2	0,005–0,015	0,006–0,017	0,007–0,02	0,013–0,039	0,016–0,045	0,018–0,051	0,02–0,056	0,025–0,072	0,021–0,059	0,024–0,069	0,027–0,078	0,03–0,086	0,039–0,111
K.3.1	0,006–0,018	0,007–0,021	0,008–0,024	0,017–0,047	0,019–0,056	0,022–0,062	0,024–0,069	0,031–0,089	0,026–0,073	0,03–0,085	0,034–0,096	0,037–0,106	0,048–0,136
K.3.2	0,005–0,015	0,006–0,018	0,007–0,02	0,014–0,04	0,016–0,046	0,018–0,052	0,02–0,057	0,026–0,074	0,021–0,061	0,025–0,071	0,028–0,08	0,031–0,088	0,04–0,114
N.1.1	0,008–0,023	0,009–0,027	0,011–0,03	0,02–0,058	0,024–0,068	0,027–0,077	0,03–0,084	0,038–0,109	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.1.2	0,008–0,022	0,009–0,026	0,01–0,03	0,02–0,058	0,024–0,068	0,027–0,077	0,03–0,084	0,038–0,109	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.2.1	0,007–0,021	0,009–0,025	0,01–0,028	0,019–0,055	0,023–0,065	0,025–0,073	0,028–0,08	0,036–0,103	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.2.2	0,007–0,021	0,009–0,024	0,01–0,028	0,019–0,054	0,022–0,064	0,025–0,072	0,028–0,079	0,036–0,102	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.2.3	0,007–0,021	0,008–0,024	0,009–0,027	0,019–0,053	0,022–0,062	0,025–0,07	0,027–0,077	0,035–0,1	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.3.1	0,007–0,021	0,009–0,025	0,01–0,028	0,019–0,055	0,023–0,065	0,025–0,073	0,028–0,08	0,036–0,103	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.3.2	0,007–0,02	0,008–0,024	0,009–0,027	0,018–0,052	0,021–0,061	0,024–0,069	0,027–0,076	0,034–0,098	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.3.3	0,007–0,019	0,008–0,023	0,009–0,026	0,018–0,05	0,021–0,059	0,023–0,066	0,026–0,073	0,033–0,094	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
N.4.1	0,007–0,019	0,008–0,023	0,009–0,026	0,018–0,05	0,021–0,059	0,023–0,066	0,026–0,073	0,033–0,094	0,027–0,078	0,032–0,091	0,036–0,102	0,039–0,112	0,051–0,145
S.1.1	0,006–0,017	0,007–0,02	0,008–0,023	0,016–0,044	0,018–0,052	0,02–0,059	0,023–0,064	0,029–0,083	0,024–0,068	0,028–0,08	0,032–0,09	0,035–0,099	0,045–0,128
S.1.2	0,005–0,013	0,005–0,016	0,006–0,018	0,012–0,035	0,014–0,04	0,016–0,046	0,018–0,05	0,023–0,065	0,019–0,053	0,022–0,062	0,025–0,07	0,027–0,077	0,035–0,099
S.2.1	0,005–0,013	0,005–0,015	0,006–0,017	0,012–0,034	0,014–0,039	0,015–0,044	0,017–0,049	0,022–0,063	0,018–0,052	0,021–0,061	0,024–0,068	0,026–0,075	0,034–0,097
S.2.2	0,003–0,01	0,004–0,012	0,005–0,013	0,009–0,026	0,011–0,03	0,012–0,034	0,013–0,037	0,017–0,048	0,014–0,04	0,016–0,046	0,018–0,052	0,02–0,057	0,026–0,074
S.2.3	0,004–0,011	0,004–0,012	0,005–0,014	0,01–0,028	0,011–0,032	0,013–0,036	0,014–0,04	0,018–0,052	0,015–0,043	0,017–0,05	0,02–0,056	0,022–0,062	0,028–0,08
S.3.1	0,006–0,017	0,007–0,02	0,008–0,023	0,016–0,044	0,018–0,052	0,02–0,059	0,023–0,064	0,029–0,083	0,024–0,068	0,028–0,08	0,032–0,09	0,035–0,099	0,045–0,128
S.3.2	0,005–0,014	0,006–0,016	0,006–0,018	0,012–0,036	0,015–0,042	0,016–0,047	0,018–0,051	0,023–0,066	0,019–0,055	0,022–0,064	0,025–0,072	0,028–0,079	0,036–0,102
S.3.3	0,003–0,01	0,004–0,011	0,004–0,013	0,009–0,025	0,01–0,029	0,011–0,033	0,013–0,036	0,016–0,046	0,013–0,038	0,016–0,045	0,018–0,05	0,019–0,055	0,025–0,071
H.1.1	0,003–0,01	0,004–0,011	0,004–0,013	0,009–0,025	0,01–0,029	0,011–0,033	0,013–0,036	0,016–0,046	0,013–0,038	0,016–0,045	0,018–0,05	0,019–0,055	0,025–0,071
H.1.2	0,003–0,008	0,003–0,009	0,004–0,01	0,007–0,02	0,008–0,023	0,009–0,026	0,01–0,029	0,013–0,037	0,011–0,03	0,012–0,036	0,014–0,04	0,015–0,044	0,02–0,057
H.1.3													
H.1.4													
H.2.1	0,004–0,01	0,004–0,012	0,005–0,014	0,009–0,027	0,011–0,031	0,012–0,035	0,014–0,039	0,017–0,05	0,014–0,041	0,017–0,048	0,019–0,054	0,021–0,059	0,027–0,077
H.3.1	0,003–0,009	0,004–0,011	0,004–0,012	0,008–0,024	0,01–0,028	0,011–0,031	0,012–0,034	0,016–0,044	0,013–0,036	0,015–0,043	0,017–0,048	0,018–0,053	0,024–0,068
O.1.1	0,008–0,022	0,009–0,026	0,01–0,03	0,02–0,058	0,024–0,068	0,027–0,077	0,03–0,084	0,038–0,109	0,027–0,076	0,031–0,089	0,035–0,1	0,039–0,11	0,05–0,142
O.1.2	0,007–0,02	0,008–0,023	0,009–0,026	0,018–0,051	0,021–0,06	0,024–0,068	0,026–0,074	0,034–0,096	0,028–0,079	0,032–0,093	0,036–0,104	0,04–0,114	0,052–0,148
O.2.1	0,004–0,013	0,005–0,015	0,006–0,017	0,011–0,033	0,013–0,038	0,015–0,043	0,017–0,047	0,021–0,061	0,018–0,05	0,021–0,059	0,023–0,066	0,025–0,073	0,033–0,094
O.2.2	0,004–0,012	0,005–0,014	0,006–0,016	0,011–0,032	0,013–0,037	0,015–0,042	0,016–0,046	0,021–0,059	0,017–0,049	0,02–0,057	0,022–0,064	0,025–0,07	0,032–0,091
O.3.1													

12

Broaching – Recommendations for Correct Use

SlotCut

More and more often small and medium sized batch sizes are manufactured with precision grooves.

To directly machine such grooves in one set-up on one machine, it requires a special application of “Broaching” tools.

The SlotCut system can produce grooves with the most common groove tolerances.
To this end, there are four options. Two concepts are based on a solid carbide solution, which gives great success with small diameters.
For larger diameters, the concept with screw-on inserts is more suitable.

Broaching, on both lathes and machining centers is now economical, and provides highly accurate results in the shortest possible time.

Appoximate values when broaching

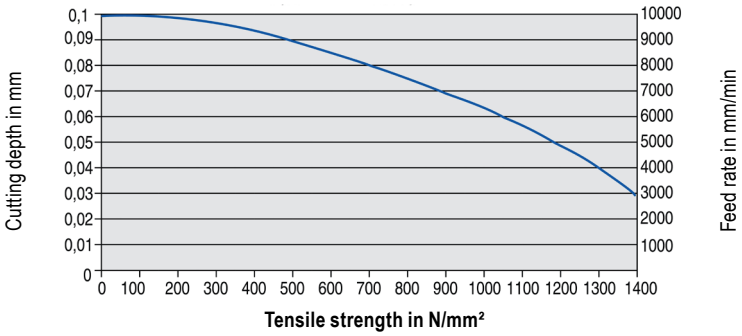

The data depends strongly on the conditions and represent only an appoximate value, factors such as machine stability, application and material may require adjustment of the data upward or downward.

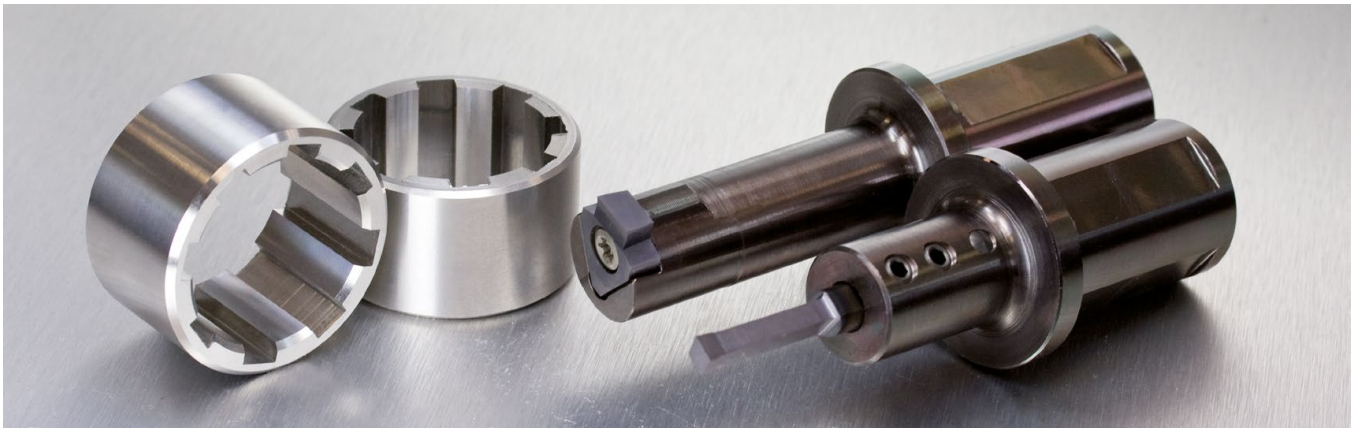

Tips for the User

- ▲ Avoid interrupted cuts.
- ▲ Where possible, orientate the part so the groove is at the top, so the chips fall away!
- ▲ Ensure there is a relief at the end of the groove.
- ▲ Lift the tool out of the groove when retracting.
- ▲ Use coolant
  This will increase tool life and surface quality.
- ▲ Adjustment of the tool is essential, therefore the tool diameter must be considered.

Coatings

TiAlN+
- ▲ TiAlN multilayer coating
- ▲ Maximum application temperature: 1000°C

TiN
- ▲ TiN coating
- ▲ Maximum application temperature: 450°C

TiAlN
- ▲ TiAlN multilayer coating
- ▲ Maximum application temperature: 900°C

CWX500
- ▲ Carbide, TiAlN-coated
- ▲ The universal carbide grade for almost all materials

DPX77S
- ▲ TiAlN+X-coating
- ▲ Maximum application temperature: 900°C

DPX57S
- ▲ TiCrN coating
- ▲ Maximum application temperature: 900°C

Thread types

M Metric ISO standard thread

MF Metric ISO fine thread

G Whitworth thread

Tr Metric ISO trapezoidal fine thread

Thread flank angle



Cooling

with thro' coolant

12

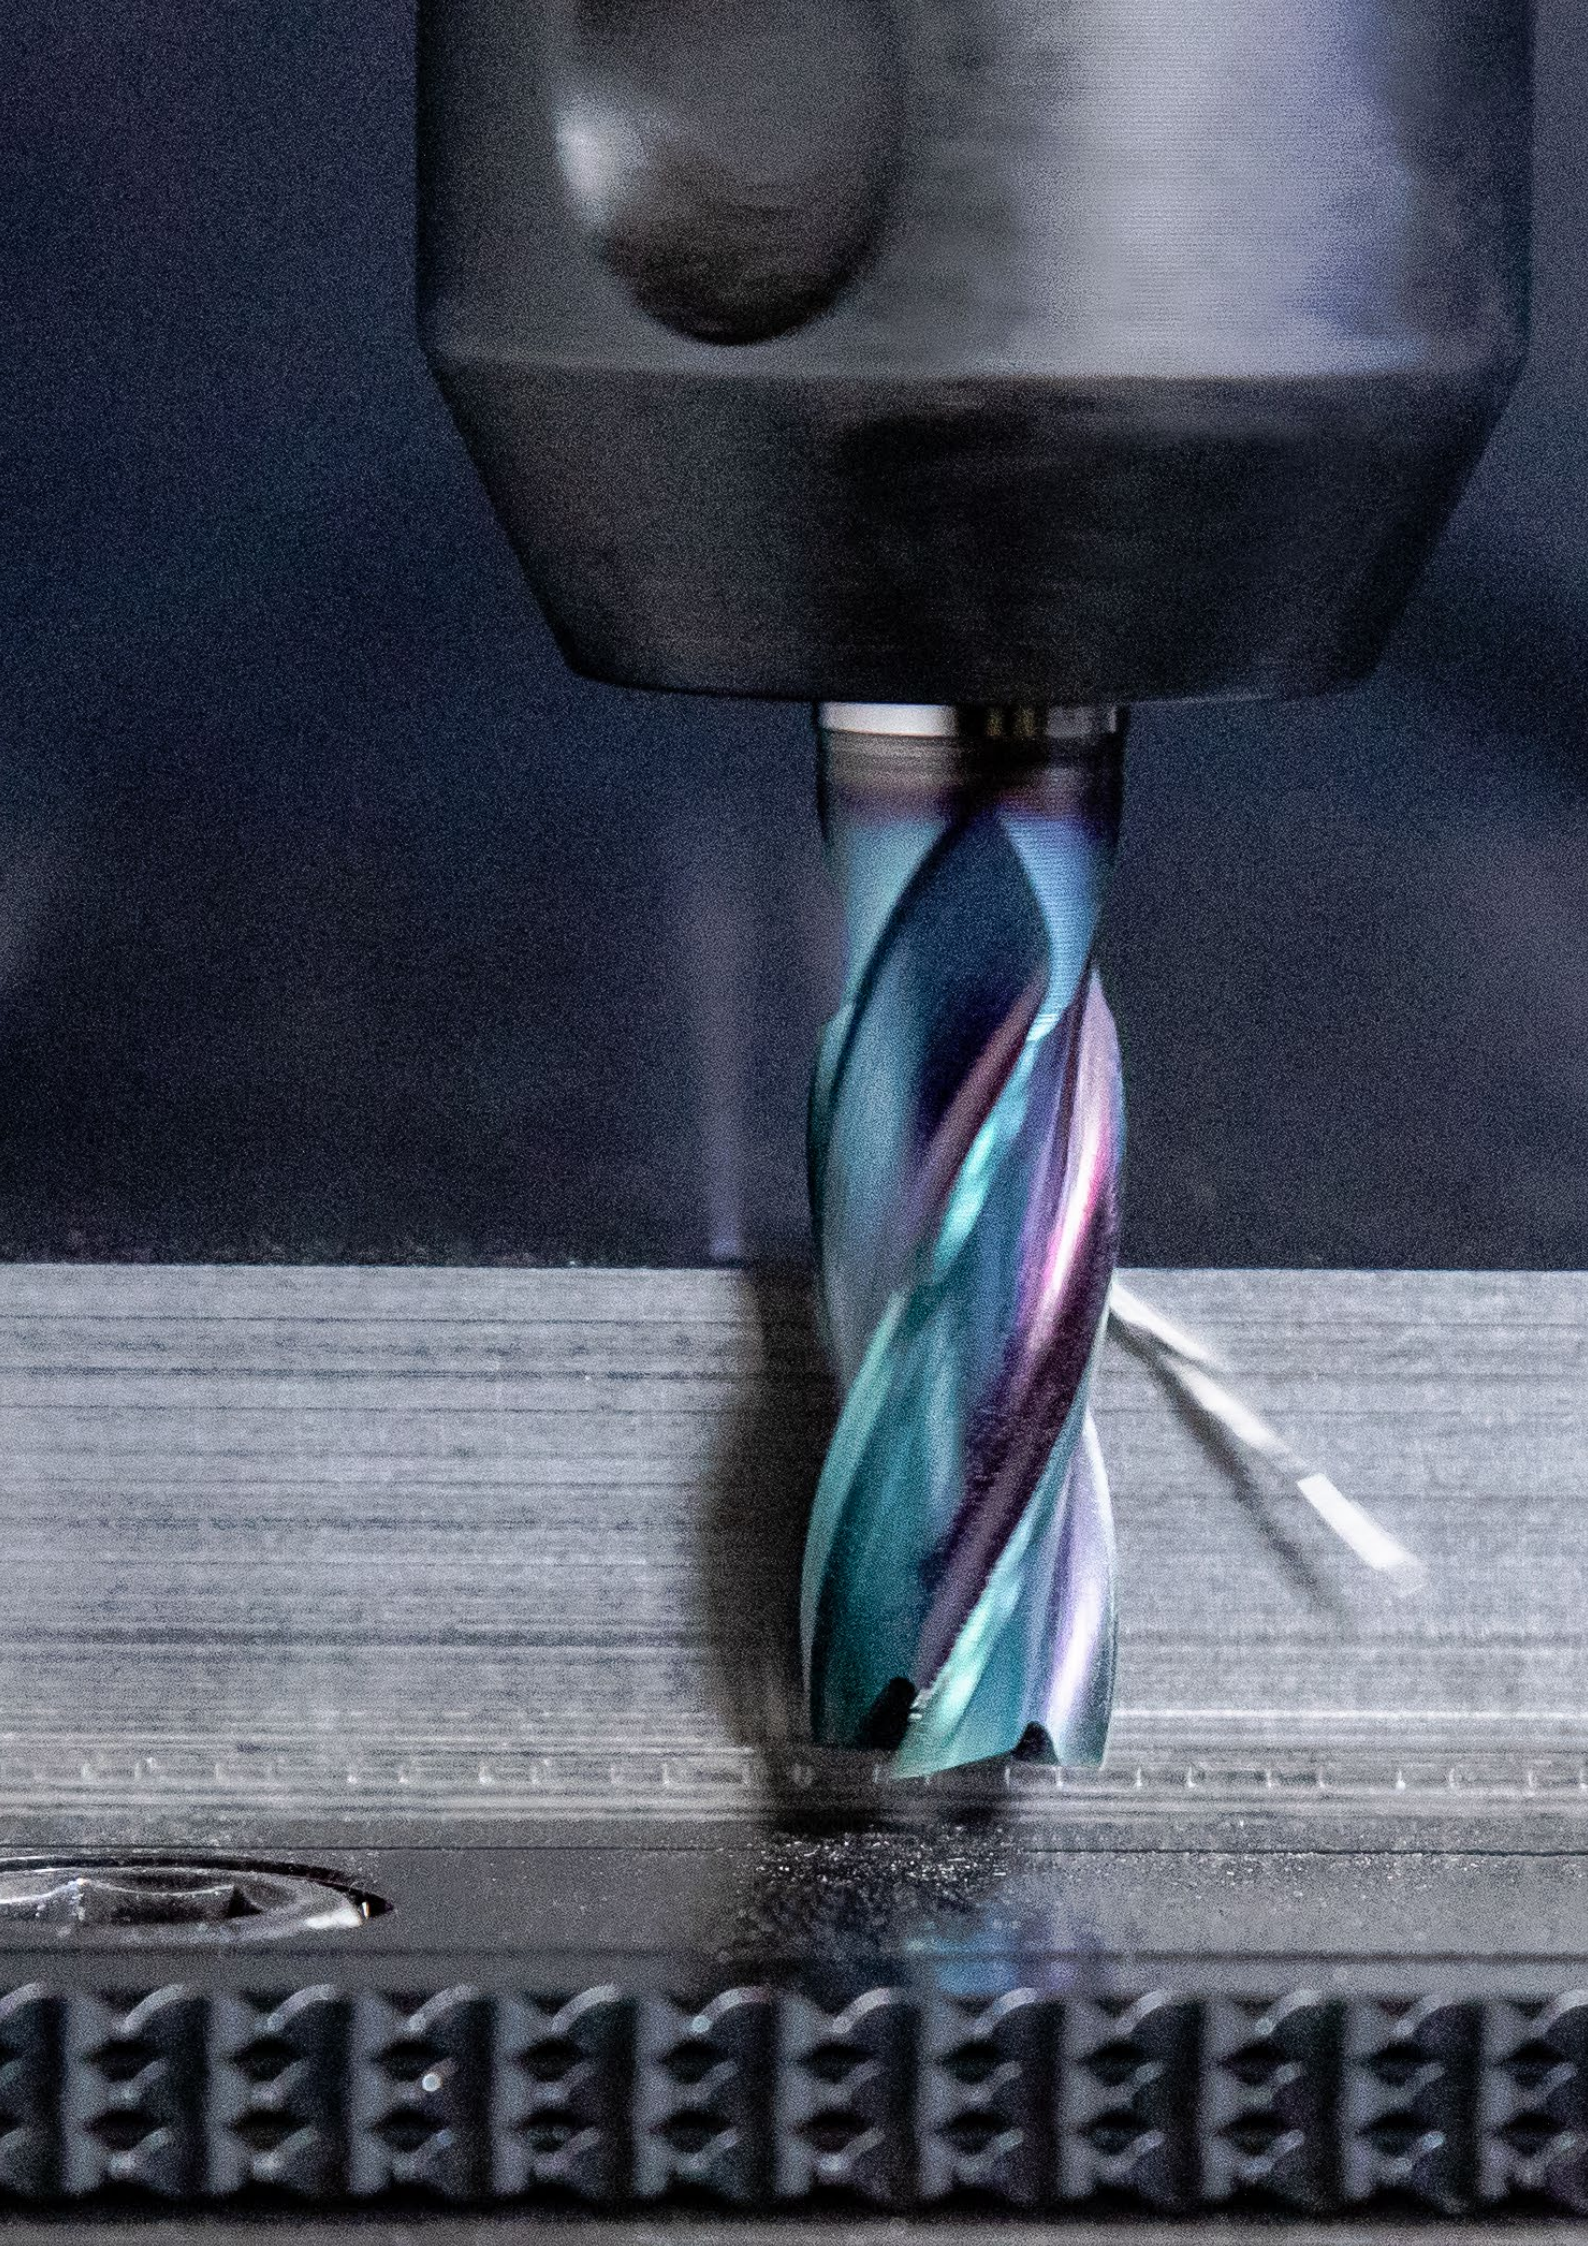

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Toolfinder	5
List of contents	6+7
Product programme	8–31
Technical Information:	
Cutting Data	32–40
Formula for cutting data calculation	40
Version description	41
Differences between the milling cutter types	41
Coating	41

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Symbol explanation

Shank

Shank type

Length: extra short / short / medium / long / extra long

Cutting edge preparation

Sharp

Corner chamfer (CHW = chamfer width in mm)

Full Radius

Application

Machining example

The red arrows describe the possible feed directions

Cutting geometry
λ_s = helix angle
γ_s = rake angle

ZEFP = Number of flutes

● = **Main Application**

○ = Extended application

Toolfinder

softer — Material to machine — harder

Finish milling

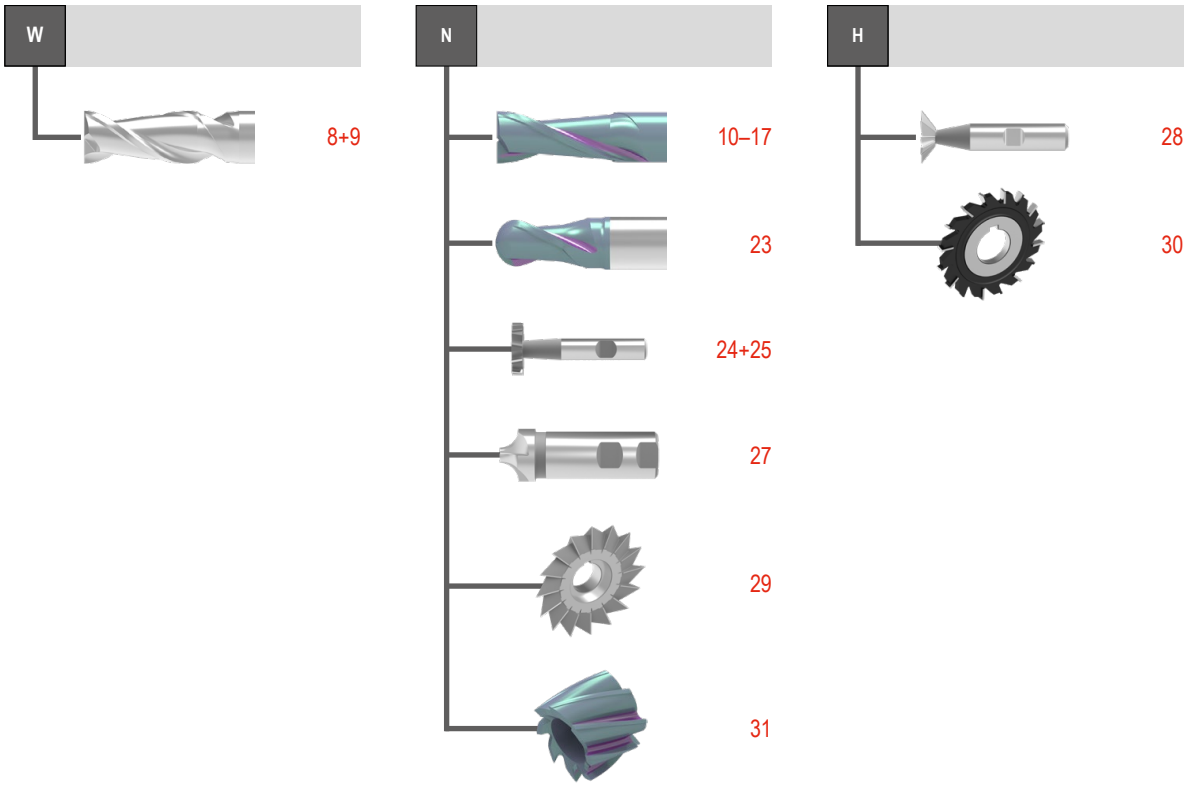

Rough and finish machining

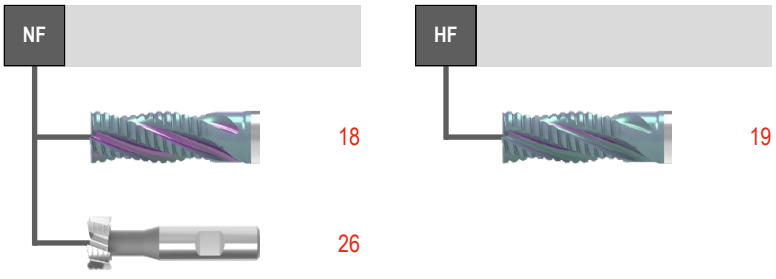

Rough machining

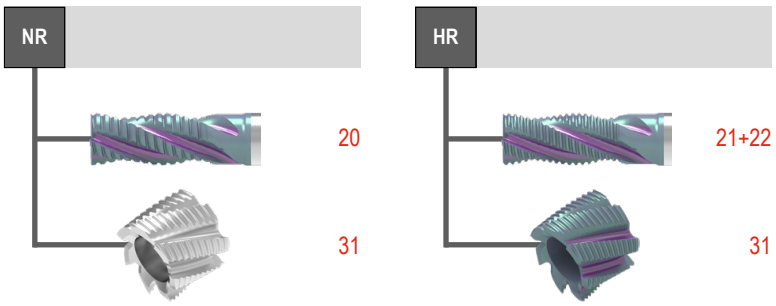

13

Overview HSS milling cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Material, e.g. PM = Powdersteel	coated	uncoated	WNT \ Performance
Finishing cutter																			
	W	2	2–20				●			●	■				▤	HSS-E		□	8
	W	3–4	2–32				●			●	■				▤	HSS-E		□	9
	N	2	1–26	●	●	●	○	○		○	■				▤	HSS-E	■	□	10+11
	N	3	1–10	●	●	●	○	○		○	■				▤	HSS-E	■	□	12
	N	3	1,8–22,0	●	●	●	○	○		○	■				▤	HSS-E	■		13+14
	N	4	4–20	○	●	○	●	●		●	■				▤	HSS-E	■	□	15
	N	4–8	2–50	●	●	●	○	○		○	■				▤	HSS-E	■	□	16+17
Rough and finish milling cutters																			
	NF	4	6–25	●	○	●	○	○		○	■				▤	HSS-E	■		18
	HF	4	6–20	●	○	●	○	○		○	■				▤	PM	■		19
Rough milling cutters																			
	NR	3	6–25	●	○	●	○	○		○		■			▤	HSS-E	■		20
	HR	4–6	6–32	●	●	●	○	○		○		■			▤	PM	■		21
	HR	3–6	4–32	●	●	●	○	○		○		■			▤	HSS-E	■		22
Ball nose end milling cutters																			
	N	2	2–30	●	○	●	○	○		○				◡	▤	HSS-E	■	□	23

Overview HSS milling cutters

Form / Side and Face / Shell milling cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Material, e.g. PM = Powdersteel	coated	uncoated	WNT \ Performance
	N	6–10	11–60	●	○	●	○	○		○						HSS-E		☐	24
	N	6–12	10,5–45,5	●	○	●	○	○		○						HSS-E		☐	25
	NF	6–8	21–45	●	○	●	○	○		○						HSS-E		☐	26
	N	4–6	6–16	●	○	●	○	○		○						HSS-E		☐	27
	H	10	16–25	●	○	●	○	○		○						HSS-E		☐	28
	N	14–28	40–125	●	○	●	○	○		○						HSS-E		☐	29
	H	16–48	50–160	●	○	●	●	●		●						HSS-E		☐	30
		7–10	40–80	●	●	●	●	○		●						HSS-E	☐	☐	31

13

Slot milling cutter HSS-E Co 8



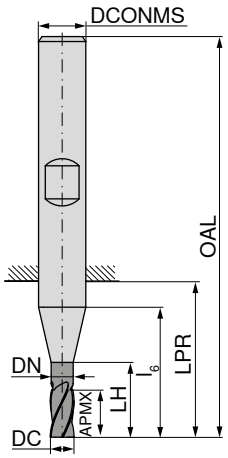

DIN 844

50 144 ...

DC e8 mm	APMX mm	DN mm	LH mm	l6 mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U6	
2,0	7		7	13	15	51	6	2	27,46	**020**
2,5	8		8	14	16	52	6	2	27,46	**025**
3,0	8		8	14	16	52	6	2	27,46	**030**
4,0	11		11	17	19	55	6	2	27,46	**040**
5,0	13		13	19	21	57	6	2	27,46	**050**
6,0	13		13	19	21	57	6	2	27,46	**060**
6,5	16	6,0	22	24	26	66	10	2	37,01	**065**
8,0	19	7,5	25	27	29	69	10	2	37,01	**080**
10,0	22	9,5	30	30	32	72	10	2	37,01	**100**
12,0	26	11,5	36	36	38	83	12	2	48,92	**120**
14,0	26	11,5	36	36	38	83	12	2	54,38	**140**
16,0	32	15,0	42	42	44	92	16	2	65,72	**160**
18,0	32	15,0	42	42	44	92	16	2	80,87	**180**
20,0	38	19,0	52	52	54	104	20	2	97,56	**200**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 33–35

End milling cutter HSS-E Co 8





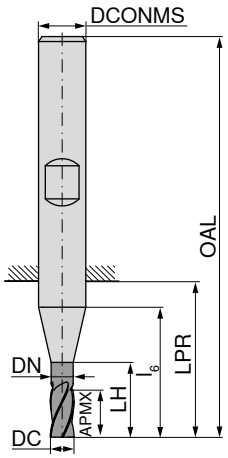

DIN 69844 | DIN 844

DC k10 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 120 ... EUR U8		50 121 ... EUR U8	
2	7		7	13	15	51	6	3	47,55	020		
3	8		8	14	16	52	6	3	45,63	030		
3	12		12	18	20	56	6	3			52,05	030
4	11		11	17	19	55	6	3	38,55	040		
4	19		19	25	27	63	6	3			53,40	040
5	13		13	19	21	57	6	3	38,55	050		
5	24		24	30	32	68	6	3			53,40	050
6	13	5,5	19	19	21	57	6	3	40,86	060		
6	24	5,5	30	30	32	68	6	3			50,68	060
7	16	6,5	22	24	26	66	10	3	53,98	070		
7	30	6,5	36	38	40	80	10	3			76,10	070
8	19	7,5	25	27	29	69	10	3	48,23	080		
8	38	7,5	44	46	48	88	10	3			60,94	080
9	19	8,5	26	27	29	69	10	3	62,59	090		
9	38	8,5	45	46	48	88	10	3			84,99	090
10	22	9,5	30	30	32	72	10	3	55,20	100		
10	45	9,5	53	53	55	95	10	3			68,72	100
12	26	11,5	36	36	38	83	12	3	64,90	120		
12	53	11,5	63	63	65	110	12	3			76,10	120
14	26	11,5	36	36	38	83	12	3	82,12	140		
14	53	11,5	63	63	65	110	12	3			88,82	140
16	32	15,0	42	42	44	92	16	3	77,05	160		
16	63	15,0	73	73	75	123	16	3			93,86	160
18	32	15,0	42	42	44	92	16	3	127,70	180		
18	63	15,0	73	73	75	123	16	3			157,20	180
20	38	19,0	52	52	54	104	20	3	125,20	200		
20	75	19,0	89	89	91	141	20	3			150,30	200
22	38	19,0	52	52	54	104	20	3	181,60	220		
22	75	19,0	89	89	91	141	20	3			225,30	220
24	90	23,0	106	108	110	166	25	3			288,30	240
25	45	24,0	63	45	65	121	25	4	199,50	250		
25	90	24,0	108	108	110	166	25	4			273,40	250
28	90	24,0	108	108	110	166	25	4			308,80	280
30	90	24,0	108	108	110	166	25	4			389,40	300
32	106	31,0	123	123	126	186	32	4			401,80	320

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 33–35

Slot milling cutter HSS-E Co 8



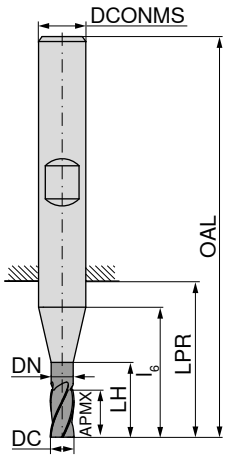

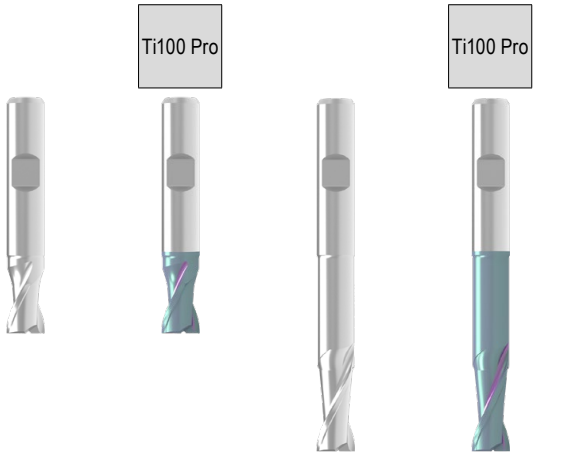

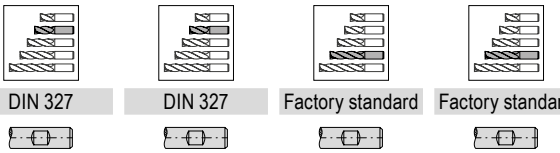

	DIN 327	DIN 327	Factory standard	Factory standard
	50 100 ...	**54 025 ...**	**50 122 ...**	**54 020 ...**

DC mm	DC Tol.	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR U8		EUR U8		EUR U8		EUR U8	
1,0	h10	2,5		2,5	9	11	47	6	2	40,16	**010** [1]	45,91	**010** [1]				
1,5	h10	3,0		3,0	9	11	47	6	2	37,56	**015** [1]	45,91	**015** [1]				
1,8	h10	4,0		4,0	10	12	48	6	2	18,46	**018**	46,86	**018**				
2,0	e8	4,0		4,0	10	12	48	6	2	22,01	**020**	38,67	**020**				
2,5	e8	5,0		5,0	11	13	49	6	2	22,01	**025**	38,67	**025**				
3,0	e8	5,0		5,0	11	13	49	6	2	20,09	**030**	38,67	**030**				
3,0	e8	8,0		8,0	18	20	56	6	2					32,25	**030**	56,97	**030**
3,5	h10	6,0		6,0	12	14	50	6	2	21,86	**035**	40,45	**035**				
4,0	e8	7,0		7,0	13	15	51	6	2	20,09	**040**	34,01	**040**				
4,0	e8	11,0		11,0	25	27	63	6	2					34,57	**040**	56,97	**040**
4,5	h10	7,0		7,0	13	15	51	6	2	25,01	**045**	40,45	**045**				
5,0	e8	8,0		8,0	14	16	52	6	2	20,09	**050**	38,67	**050**				
5,0	e8	13,0		13,0	30	32	68	6	2					33,50	**050**	56,97	**050**
5,5	h10	8,0		8,0	14	16	52	6	2	25,01	**055**	40,45	**055**				
6,0	e8	8,0	5,50	14,0	14	16	52	6	2	20,09	**060**	38,67	**060**				
6,0	e8	13,0	5,50	30,0	30	32	68	6	2					36,60	**060**	55,20	**060**
6,5	h10	10,0	6,00	16,0	18	20	60	10	2	27,59	**065**	47,67	**065**				
7,0	e8	10,0	6,50	16,0	18	20	60	10	2	29,38	**070**	45,91	**070**				
7,0	e8	16,0	6,35	36,0	38	40	80	10	2					46,04	**070**	71,61	**070**
7,5	h10	10,0	7,00	16,0	18	20	60	10	2	31,30	**075**	47,67	**075**				
8,0	e8	11,0	7,50	17,0	19	21	61	10	2	26,63	**080**	45,91	**080**				
8,0	e8	19,0	7,35	44,0	46	48	88	10	2					40,03	**080**	70,78	**080**
8,5	h10	11,0	8,00	18,0	19	21	61	10	2	31,30	**085**	59,71	**085**				
9,0	h10	11,0	8,50	18,0	19	21	61	10	2	30,61	**090**	58,91	**090**				
9,0	h10	19,0	8,35	45,0	46	48	88	10	2					52,48	**090**	82,67	**090**
9,5	h10	11,0	9,00	18,0	19	21	61	10	2	38,39	**095**	59,71	**095**				
10,0	e8	13,0	9,50	21,0	21	23	63	10	2	29,24	**100**	51,52	**100**				
10,0	e8	22,0	9,35	53,0	53	55	95	10	2					43,44	**100**	73,51	**100**
10,5	h10	13,0	10,00	21,0	23	25	70	12	2	54,94	**105**	69,80	**105**				
11,0	h10	13,0	10,50	21,0	23	25	70	12	2	47,55	**110**	63,54	**110**				
11,0	h10	22,0	10,50	53,0	55	57	102	12	2					60,67	**110**	88,13	**110**
11,5	h10	13,0	11,00	21,0	23	25	70	12	2	54,65	**115**	70,78	**115**				
12,0	e8	16,0	11,50	26,0	26	28	73	12	2	39,90	**120**	63,54	**120**				
12,0	e8	26,0	11,50	63,0	63	65	110	12	2					50,01	**120**	83,75	**120**
13,0	h10	16,0	11,50	26,0	26	28	73	12	2	54,65	**130**	93,73	**130**				
14,0	e8	16,0	11,50	26,0	26	28	73	12	2	52,05	**140**	86,35	**140**				
14,0	e8	26,0	11,50	63,0	63	65	110	12	2					63,40	**140**	115,70	**140**
15,0	h10	16,0	11,50	26,0	26	28	73	12	2	63,40	**150**	93,73	**150**				
15,0	h10	26,0	11,50	63,0	63	65	110	12	2					78,02	**150**	130,60	**150**
16,0	e8	19,0	15,00	29,0	29	31	79	16	2	58,07	**160**	93,73	**160**				
16,0	e8	32,0	15,00	73,0	73	75	123	16	2					75,69	**160**	126,90	**160**

P	●	●	●	●
M	○	●	○	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

1) Factory standard

→ v_c/f_z Page 33–35

Continued on next page

Slot milling cutter HSS-E Co 8



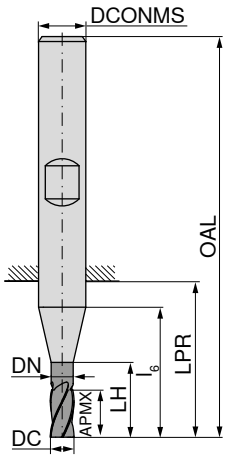

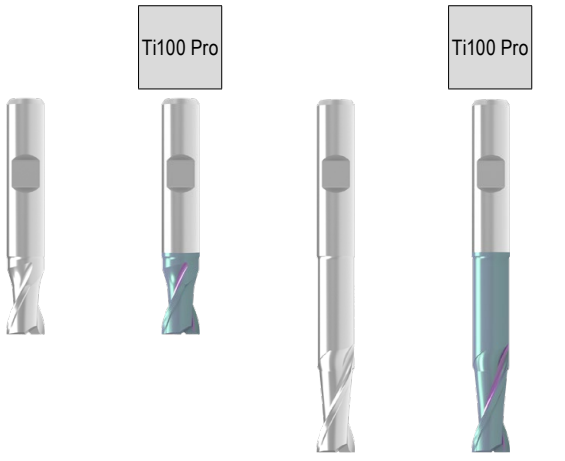

										DIN 327		DIN 327		Factory standard		Factory standard	
										50 100 ...		54 025 ...		50 122 ...		54 020 ...	
DC mm	DC Tol.	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR U8		EUR U8		EUR U8		EUR U8	
17,0	h10	19,0	15,00	29,0	29	31	79	16	2	74,74	**170**	134,20	**170**				
18,0	e8	19,0	15,00	29,0	29	31	79	16	2	79,52	**180**	119,50	**180**				
18,0	e8	32,0	15,00	73,0	73	75	123	16	2					99,32	**180**	170,90	**180**
19,0	h10	19,0	15,00	29,0	29	31	79	16	2	96,46	**190**	149,00	**190**				
20,0	e8	22,0	19,00	36,0	36	38	88	20	2	90,05	**200**	128,60	**200**				
20,0	e8	38,0	19,00	89,0	89	91	141	20	2					99,75	**200**	174,90	**200**
22,0	e8	22,0	19,00	36,0	36	38	88	20	2	110,10	**220**	183,30	**220**				
24,0	e8	26,0	23,00	42,0	44	46	102	25	2	143,40	**240**	222,70	**240**				
25,0	e8	26,0	24,00	44,0	44	46	102	25	2	136,10	**250**	221,40	**250**				
26,0	h10	26,0	24,00	44,0	44	46	102	25	2	165,40	**260**	287,00	**260**				
P										●		●		●		●	
M										○		●		○		●	
K										●		●		●		●	
N										○		○		○		○	
S										○		○		○		○	
H																	
O										○		○		○		○	

1) Factory standard

→ v_c/f_z Page 33–35

Throw-away milling cutter, HSS-E Co 8

▲ Shank similar to DIN 1835 B



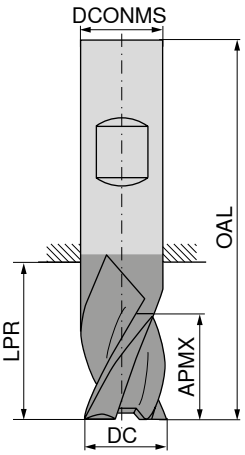

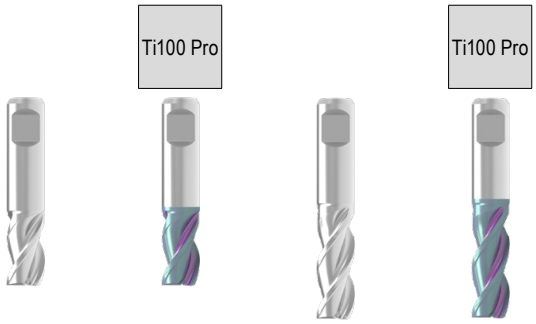

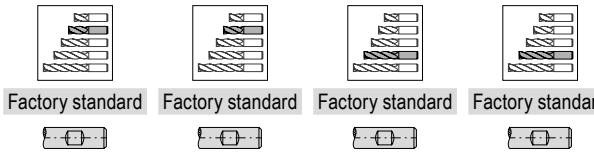

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 092 ... EUR U6		54 014 ... EUR U8		50 093 ... EUR U6		54 042 ... EUR U8	
1,00	2	8	34	6	3	14,62	010	28,95	010				
1,50	3	8	34	6	3	14,62	015	28,95	015				
1,50	4	10	35	6	3					17,08	015 1)	32,38	015 1)
1,80	3	8	34	6	3	14,62	018	28,95	018				
2,00	4	9	35	6	3	14,62	020	28,95	020				
2,00	7	12	38	6	3					17,08	020 1)	32,38	020
2,30	4	9	35	6	3	14,62	023	28,95	023				
2,50	5	10	36	6	3	14,62	025	28,95	025				
2,50	8	13	39	6	3					17,08	025 1)	32,38	025
2,80	5	10	36	6	3	14,62	028	28,95	028				
3,00	5	10	36	6	3	14,62	030	28,95	030				
3,00	8	13	39	6	3					17,08	030 1)	32,38	030
3,30	6	11	37	6	3	14,62	033	28,95	033				
3,50	6	11	37	6	3	14,62	035	28,95	035				
3,50	10	15	41	6	3					17,08	035 1)	32,38	035
3,80	7	12	38	6	3	14,62	038	28,95	038				
4,00	7	12	38	6	3	14,62	040	28,95	040				
4,00	11	16	42	6	3					17,08	040 1)	32,38	040
4,30	7	12	38	6	3	14,62	043	28,95	043				
4,50	7	12	38	6	3	14,62	045	28,95	045				
4,50	11	16	42	6	3					17,08	045 1)	32,38	045
4,80	8	13	39	6	3	14,62	048	28,95	048				
5,00	8	13	39	6	3	14,62	050	28,95	050				
5,00	13	18	44	6	3					17,08	050 1)	32,38	050
5,30	8	13	39	6	3	14,62	053	28,95	053				
5,50	8	13	39	6	3	14,62	055	28,95	055				
5,50	13	18	44	6	3					17,08	055 1)	32,38	055
5,75	8	13	39	6	3	14,62	057	28,95	057				
6,00	8	13	39	6	3	14,62	060	28,95	060				
6,00	13	18	44	6	3					17,08	060 1)	32,38	060
6,50	10	14	42	8	3	16,95	065	39,49	065				
6,50	16	20	48	8	3					20,22	065 1)	43,18	065
7,00	10	14	42	8	3	16,95	070	39,49	070				
7,00	16	20	48	8	3					20,22	070 1)	43,18	070
7,50	10	14	42	8	3	16,95	075	39,49	075				
7,50	16	20	48	8	3					20,22	075 1)	43,18	075
8,00	11	15	43	8	3	16,95	080	39,49	080				
8,00	19	23	51	8	3					20,22	080 1)	43,18	080
8,50	11	16	48	10	3	22,01	085	45,10	085				
8,50	19	24	56	10	3					25,27	085 1)	48,36	085
9,00	11	16	48	10	3	22,01	090	45,10	090				
9,00	19	24	56	10	3					25,27	090 1)	48,36	090
9,50	11	16	48	10	3	22,01	095	45,10	095				
9,50	19	24	56	10	3					25,27	095 1)	48,36	095
10,00	13	18	50	10	3	22,01	100	45,10	100				
10,00	22	27	59	10	3					25,27	100 1)	48,36	100
P						●		●		●		●	
M						○		●		○		●	
K						●		●		●		●	
N						○		○		○		○	
S						○		○		○		○	
H													
O						○		○		○		○	

1) Shank tolerance -0,025 / -0,0323

→ v_c/f_z Page 33–35

End milling cutter HSS-E Co 8

▲ ≤ Ø DC 6 mm, 3 cutting edges to centre



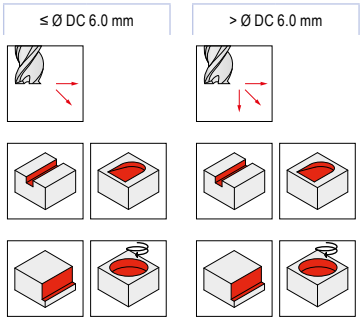

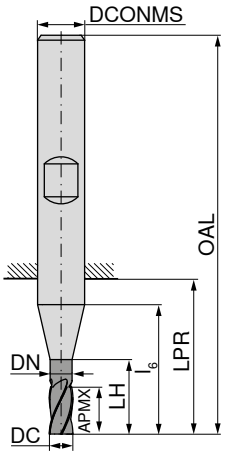

DIN 327 | DIN 844 K

DC	DC Tol.	APMX	DN	LH	l_6	LPR	OAL	DCONMS	ZEFP	54 021 ... EUR U8		54 016 ... EUR U8	
mm		mm	mm	mm	mm	mm	mm	mm					
1,8	h10	4		4	10	12	48	6	3	47,67	**018**		
2,0	e8	4		4	10	12	48	6	3	39,49	**020**		
2,5	e8	5		5	11	13	49	6	3	39,49	**025**		
3,0	e8	5		5	11	13	49	6	3	39,49	**030**		
3,0	e8	8		8	14	16	52	6	3			35,93	**030**
3,5	h10	6		6	12	14	50	6	3	43,18	**035**		
3,5	h10	10		10	16	18	54	6	3			35,93	**035**
4,0	e8	7		7	13	15	51	6	3	39,49	**040**		
4,0	e8	11		11	17	19	55	6	3			35,93	**040**
4,5	h10	7		7	13	15	51	6	3	43,18	**045**		
4,5	h10	11		11	17	19	55	6	3			35,93	**045**
5,0	e8	8		8	14	16	52	6	3	39,49	**050**		
5,0	e8	13		13	19	21	57	6	3			35,93	**050**
5,5	h10	8		8	14	16	52	6	3	43,18	**055**		
5,5	h10	13		13	19	21	57	6	3			35,93	**055**
6,0	e8	8	5,5	14	14	16	52	6	3	39,49	**060**		
6,0	e8	13	5,5	19	19	21	57	6	3			35,93	**060**
6,5	h10	10	6,0	16	18	20	60	10	3	59,71	**065**		
6,5	h10	16	6,0	22	24	26	66	10	3			51,52	**065**
7,0	e8	10	6,5	16	18	20	60	10	3	58,91	**070**		
7,0	e8	16	6,5	22	24	26	66	10	3			51,52	**070**
7,5	h10	10	7,0	16	18	20	60	10	3	59,71	**075**		
7,5	h10	16	7,0	22	24	26	66	10	3			51,52	**075**
8,0	e8	11	7,5	17	19	21	61	10	3	55,20	**080**		
8,0	e8	19	7,5	25	27	29	69	10	3			51,52	**080**
8,5	h10	11	8,0	18	19	21	61	10	3	60,67	**085**		
8,5	h10	19	8,0	26	27	29	69	10	3			51,52	**085**
9,0	h10	11	8,5	18	19	21	61	10	3	58,91	**090**		
9,0	h10	19	8,5	26	27	29	69	10	3			51,52	**090**
9,5	h10	11	9,0	18	19	21	61	10	3	62,44	**095**		
9,5	h10	19	9,0	26	27	29	69	10	3			79,11	**095**
10,0	e8	13	9,5	21	21	23	63	10	3	57,95	**100**		
10,0	e8	22	9,5	30	30	32	72	10	3			51,52	**100**
10,5	h10	13	10,0	21	23	25	70	12	3	71,61	**105**		
11,0	h10	13	10,5	21	23	25	70	12	3	67,08	**110**		
11,0	h10	22	10,5	30	32	34	79	12	3			53,16	**110**
11,5	h10	13	11,0	21	23	25	70	12	3	71,61	**115**		
11,5	h10	22	11,0	30	32	34	79	12	3			91,00	**115**
12,0	e8	16	11,5	26	26	28	73	12	3	66,26	**120**		
12,0	e8	26	11,5	36	36	38	83	12	3			62,44	**120**

P	●	●
M	●	●
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 33–35

13

Continued on next page

End milling cutter HSS-E Co 8

▲ ≤ Ø DC 6 mm, 3 cutting edges to centre



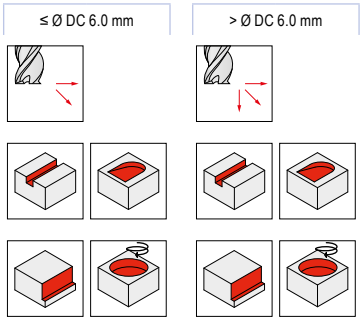

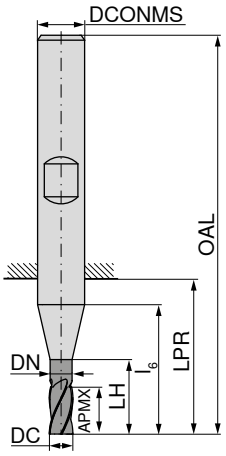

DIN 327 | DIN 844 K

DC mm	DC Tol.	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS mm	ZEFP	54 021 ... EUR U8		54 016 ... EUR U8	
13,0	h10	16	11,5	26	26	28	73	12	3	97,42	**130**		
13,0	h10	26	11,5	36	36	38	83	12	3			77,05	**130**
14,0	e8	16	11,5	26	26	28	73	12	3	91,96	**140**		
14,0	e8	26	11,5	36	36	38	83	12	3			81,71	**140**
15,0	h10	16	11,5	26	26	28	73	12	3	97,42	**150**		
15,0	h10	26	11,5	36	36	38	83	12	3			123,00	**150**
15,5	h10	32	15,0	42	42	44	92	16	3			147,60	**155**
16,0	e8	19	15,0	29	29	31	79	16	3	101,10	**160**		
16,0	e8	32	15,0	42	42	44	92	16	3			81,71	**160**
17,0	h10	19	15,0	29	29	31	79	16	3	143,40	**170**		
17,0	h10	32	15,0	42	42	44	92	16	3			108,50	**170**
18,0	e8	19	15,0	29	29	31	79	16	3	130,60	**180**		
18,0	e8	32	15,0	42	42	44	92	16	3			119,50	**180**
19,0	h10	19	15,0	29	29	31	79	16	3	158,50	**190**		
19,0	h10	32	15,0	42	42	44	92	16	3			119,50	**190**
19,5	h10	38	19,0	52	52	54	104	20	3			198,20	**195**
20,0	e8	22	19,0	36	36	38	88	20	3	138,00	**200**		
20,0	e8	38	19,0	52	52	54	104	20	3			132,30	**200**
22,0	e8	38	19,0	52	52	54	104	20	3			150,30	**220**
P										●		●	
M										●		●	
K										●		●	
N										○		○	
S										○		○	
H													
O										○		○	

→ v_c/f_z Page 33–35

End milling cutter HSS-E Co 8



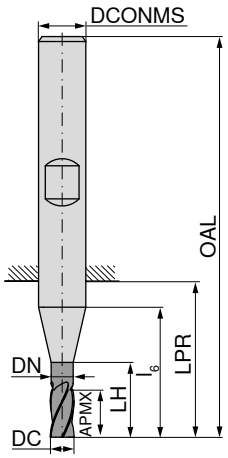



Factory standard

DIN 844

DIN 844

DC mm	DC Tol.	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	54 017 ... EUR U8		50 124 ... EUR U8		54 011 ... EUR U8	
4	k10	11		11	17	19	55	6	4			46,98	**040**	66,95	**040**
5	k10	13		13	19	21	57	6	4			46,98	**050**	72,56	**050**
6	e8	8	5,5	14	14	16	52	6	4	36,77	**060**				
6	k10	13	5,5	19	19	21	57	6	4			46,98	**060**	72,56	**060**
8	e8	11	7,5	17	19	21	61	10	4	45,91	**080**				
8	k10	19	7,5	25	27	29	69	10	4			51,91	**080**	88,55	**080**
10	e8	13	9,5	21	21	23	63	10	4	48,79	**100**				
10	k10	22	9,5	30	30	32	72	10	4			63,79	**100**	88,55	**100**
12	e8	16	11,5	26	26	28	73	12	4	58,91	**120**				
12	k10	26	11,5	36	36	38	83	12	4			71,05	**120**	111,30	**120**
14	e8	16	11,5	26	26	28	73	12	4	82,67	**140**				
14	k10	26	11,5	36	36	38	83	12	4			83,48	**140**	147,60	**140**
15	k10	26	11,5	36	36	38	83	12	4			107,90	**150**		
16	e8	19	15,0	29	29	31	79	16	4	84,58	**160**				
16	k10	32	15,0	42	42	44	92	16	4			95,09	**160**	161,20	**160**
20	e8	22	19,0	36	36	38	88	20	4	119,50	**200**				
20	k10	38	19,0	52	52	54	104	20	4			139,30	**200**	231,00	**200**

P	○	○	○
M	●	●	●
K	○	○	○
N	●	●	●
S	●	●	●
H			
O	●	●	●

→ v_c/f_z Page 33–35

13

End milling cutter HSS-E Co 8

▲ > Ø 28,0 mm recessed centre



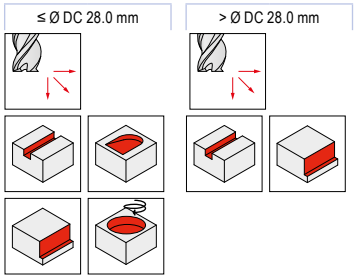

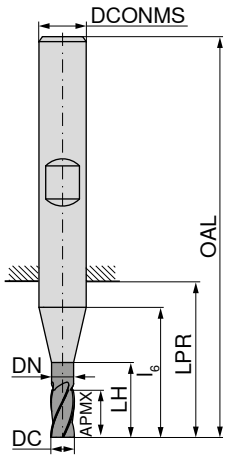

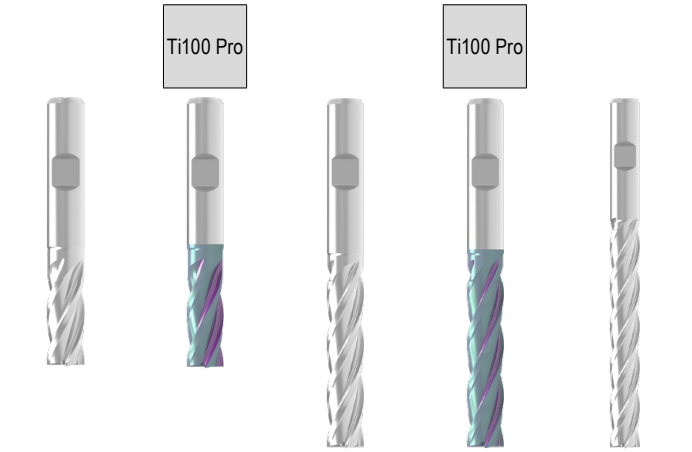

	DIN 69844	DIN 69844	DIN 844	DIN 844	Factory standard
	50 110 ...	54 018 ...	50 111 ...	54 019 ...	50 104 ...
DC mm	EUR U8	EUR U8	EUR U8	EUR U8	EUR U6
2,0	27,33 020	45,10 020			
2,5	28,83 025	43,18 025			
3,0	27,33 030	42,22 030			
3,0			38,13 030	54,24 030	
4,0	24,87 040	40,45 040			
4,0			37,44 040	54,24 040	
5,0	24,87 050	40,45 050			
5,0			37,44 050	54,24 050	
6,0	23,10 060	41,25 060			
6,0			33,88 060	53,16 060	
6,0					59,02 060
7,0	32,38 070	56,16 070			
8,0	28,42 080	54,24 080			
8,0			48,09 080	62,44 080	
8,0					66,68 080
9,0	34,71 090	61,62 090			
10,0	32,93 100	56,97 100			
10,0			50,68 100	67,08 100	
10,0					80,36 100
11,0	47,67 110	69,80 110			
12,0	45,63 120	66,26 120			
12,0			54,78 120	79,11 120	
12,0					86,78 120
13,0	68,86 130	97,42 130			
14,0	61,20 140	82,67 140			
14,0			70,23 140	104,70 140	
14,0					110,10 140
15,0	69,54 150	99,19 150			
15,0			91,14 150	121,20 150	
16,0	63,40 160	97,42 160			
16,0			78,02 160	117,50 160	
16,0					104,70 160
18,0	89,21 180	134,20 180			
18,0			96,59 180	166,70 180	
18,0					192,80 180
20,0	93,60 200	140,80 200			
20,0			111,90 200	174,90 200	
20,0					180,40 200

P	●	●	●	●	●
M	○	●	○	●	○
K	●	●	●	●	●
N	○	○	○	○	○
S	○	○	○	○	○
H					
O	○	○	○	○	○

→ v_c/f_z Page 33–35

Continued on next page

End milling cutter HSS-E Co 8

▲ > Ø 28,0 mm recessed centre



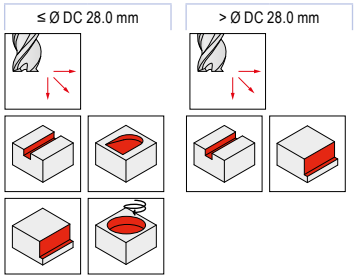

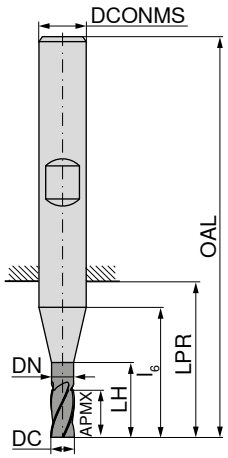

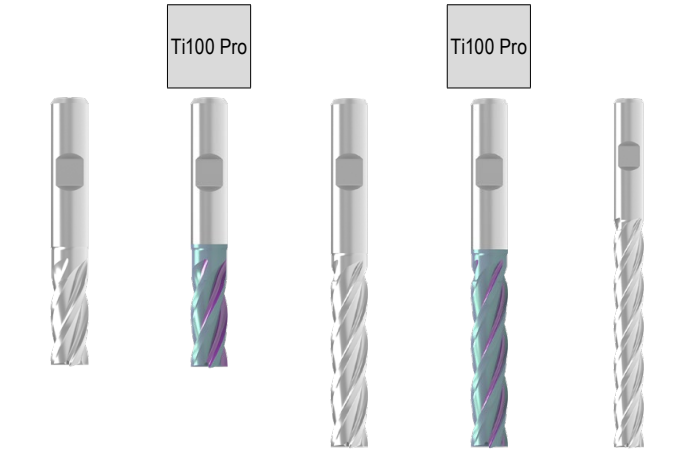

	DIN 69844	DIN 69844	DIN 844	DIN 844	Factory standard
	50 110 ...	54 018 ...	50 111 ...	54 019 ...	50 104 ...
DC mm	EUR U8	EUR U8	EUR U8	EUR U8	EUR U6
22,0	129,90 220	187,30 220			
22,0			157,20 220	282,80 220	
22,0					254,10 220
25,0	150,30 250	206,40 250			
25,0			213,30 250	300,70 250	
25,0					254,10 250
28,0	172,10 280	254,10 280			
28,0			252,70 280	393,50 280	
28,0					356,60 280
30,0	240,50 300	301,90 300			
30,0			278,70 300	468,70 300	
32,0		287,00 320			
32,0	233,70 320				
32,0			265,10 320	456,40 320	
32,0					435,90 320
40,0	349,70 400	515,20 400			
40,0			501,60 400	676,30 400	
40,0					725,50 400
50,0			971,50 500	1.082,00 500	

P	●	●	●	●	●
M	○	●	○	●	○
K	●	●	●	●	●
N	○	○	○	○	○
S	○	○	○	○	○
H					
O	○	○	○	○	○

→ v_c/f_z Page 33–35

Roughing-finishing milling cutter HSS-E Co 5



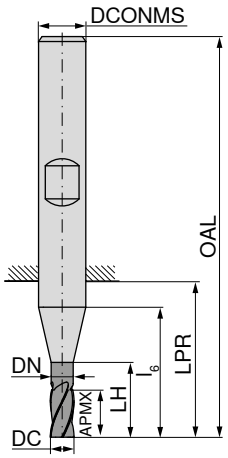

DIN 69844 | DIN 844

DC k12 mm	APMX mm	DN mm	LH mm	l6 mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 028 ... EUR U8		54 029 ... EUR U8	
6	13	5,5	19	19	21	57	6	4	62,44	060		
6	24	5,5	30	30	32	68	6	4			89,21	060
7	16	6,5	22	24	26	66	10	4	85,41	070		
8	19	7,5	25	27	29	69	10	4	80,75	080		
8	38	7,5	44	46	48	88	10	4			104,70	080
9	19	8,5	26	27	29	69	10	4	91,96	090		
10	22	9,5	30	30	32	72	10	4	84,58	100		
10	45	9,5	53	53	55	95	10	4			112,00	100
11	22	10,5	30	32	32	79	12	4	101,10	110		
11	45	10,5	53	55	57	102	12	4			149,00	110
12	26	11,5	36	36	38	83	12	4	93,73	120		
12	53	11,5	63	63	65	110	12	4			125,00	120
13	26	11,5	36	36	38	83	12	4	121,20	130		
14	26	11,5	36	36	38	83	12	4	117,50	140		
16	32	15,0	42	42	44	92	16	4	128,60	160		
16	63	15,0	73	73	75	123	16	4			169,60	160
18	32	15,0	42	42	44	92	16	4	174,90	180		
20	38	19,0	52	52	54	104	20	4	179,00	200		
20	75	19,0	89	89	91	141	20	4			240,50	200
22	38	19,0	52	52	54	104	20	4	235,10	220		
22	75	19,0	89	89	91	141	20	4			358,00	220
25	45	24,0	63	63	65	121	25	4	255,60	250		
25	90	24,0	108	108	110	166	25	4			393,50	250

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 33–35

Powdersteel roughing finishing cutter

HF | λ_s=30° γ_s=10°



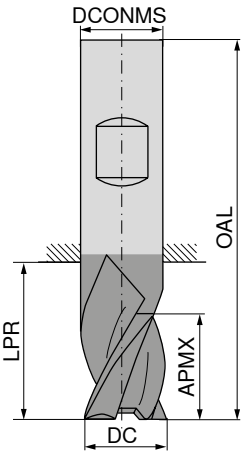

Ti100 Pro

DIN 844

54 034 ...

DC $_{k12}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR U8	
6	13	21	57	6	4	71,61	**060**
8	19	29	69	10	4	97,42	**080**
10	22	32	72	10	4	104,70	**100**
12	26	38	83	12	4	113,80	**120**
16	32	44	92	16	4	169,60	**160**
20	38	54	104	20	4	217,30	**200**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 33–35

13

Rough milling cutter HSS-E Co 8



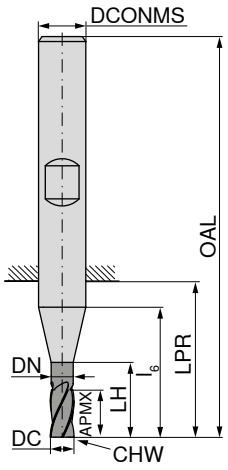



DIN 69844

DIN 844

DC k12 mm	APMX mm	DN mm	LH mm	l6 mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	54 026 ... EUR U8		54 027 ... EUR U8	
6	13	5,5	19	19	21	57	6	0,5	3	62,44	**060**		
6	24	5,5	30	30	32	68	6	0,5	3			89,21	**060**
8	19	7,5	25	27	29	69	10	0,7	3	80,75	**080**		
8	38	7,5	44	46	48	88	10	0,7	3			104,70	**080**
10	22	9,5	30	30	32	72	10	0,7	3	84,58	**100**		
10	45	9,5	53	53	55	95	10	0,7	3			112,00	**100**
12	26	11,5	36	36	38	83	12	0,7	3	93,73	**120**		
12	53	11,5	63	63	65	110	12	0,7	3			125,00	**120**
14	26	11,5	36	36	38	83	12	0,9	3	117,50	**140**		
14	53	11,5	63	63	65	110	12	0,9	3			150,30	**140**
16	32	15,0	42	42	44	92	16	0,9	3	128,60	**160**		
16	63	15,0	73	73	75	123	16	0,9	3			169,60	**160**
18	32	15,0	42	42	44	92	16	0,9	3	174,90	**180**		
18	63	15,0	73	73	75	123	16	0,9	3			226,90	**180**
20	38	19,0	52	52	54	104	20	0,9	3	179,00	**200**		
20	75	19,0	89	89	91	141	20	0,9	3			240,50	**200**
25	45	24,0	63	63	65	121	25	0,9	3	255,60	**250**		
25	90	24,0	108	108	110	166	25	0,9	3			393,50	**250**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 33–35

Powdersteel Fine rough milling cutter

HR | λ_s=30° γ_s=10°



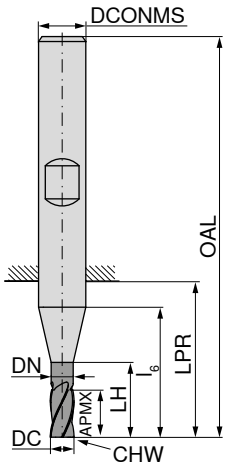

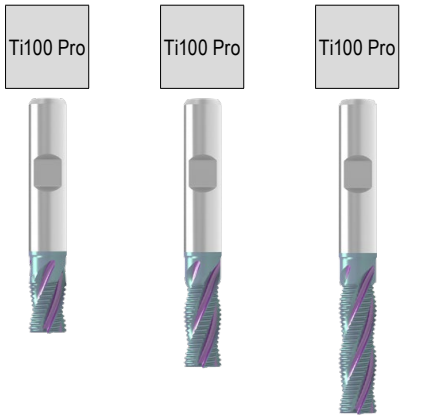

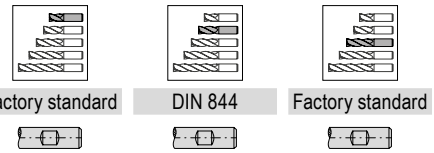

Factory standard | DIN 844 | Factory standard

			54 031 ...		54 032 ...		54 033 ...	
			EUR U8		EUR U8		EUR U8	
6	8	5,5	81,71	060				
6	13	5,5			62,44	060		
8	11	7,5	91,96	080				
8	19	7,5			88,13	080		
8	28	7,5					120,20	080
10	13	9,5	91,96	100				
10	22	9,5			97,42	100		
10	34	9,5					128,90	100
12	16	11,5	108,50	120				
12	26	11,5			110,30	120		
12	40	11,5					150,30	120
14	16	11,5	139,30	140				
14	26	11,5			123,00	140		
14	40	11,5					196,80	140
16	19	15,0	153,10	160				
16	32	15,0			153,10	160		
16	48	15,0					225,30	160
18	19	15,0	183,30	180				
18	32	15,0			187,30	180		
18	48	15,0					278,70	180
20	22	19,0	206,40	200				
20	38	19,0			214,60	200		
20	56	19,0					282,80	200
22	22	19,0	275,90	220				
22	38	19,0			299,30	220		
22	56	19,0					393,50	220
25	26	24,0	325,20	250				
25	45	24,0			293,80	250		
25	68	24,0					441,40	250
32	32	31,0	434,50	320				
32	53	31,0			469,90	320		

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 33–35

Fine profile milling cutter HSS-E Co 8

▲ > Ø 28,0 mm recessed centre

HR | λ_s=30° γ_s=10°

≤ Ø DC 28.0 mm | > Ø DC 28.0 mm

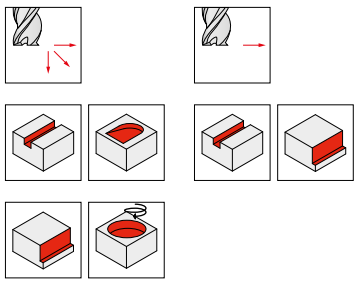

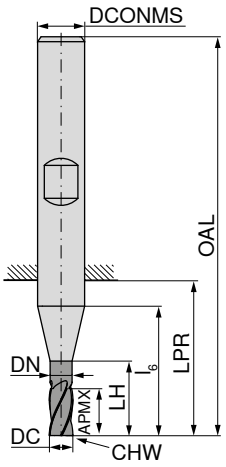

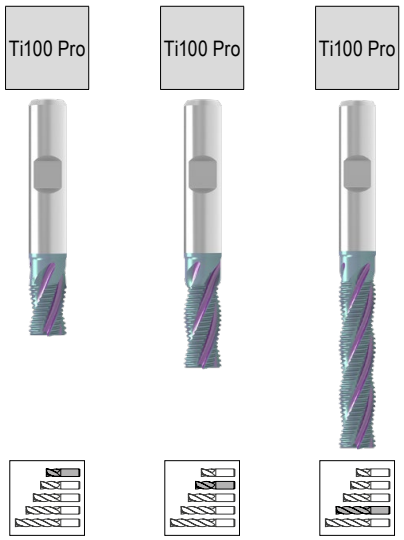

	Factory standard	DIN 69844	DIN 844
	54 022 ...	54 023 ...	54 024 ...

DC mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS mm	CHW mm	ZEFP	EUR U8		EUR U8		EUR U8	
4	11		11	17	19	55	6	0,35	3			60,67	**040**		
5	13		13	19	21	57	6	0,35	3			60,67	**050**		
6	8	5,5	14	14	16	52	6	0,35	4	65,17	**060**				
6	13	5,5	19	19	21	57	6	0,35	4			52,33	**060**		
6	24	5,5	30	30	32	68	6	0,35	4					99,19	**060**
8	11	7,5	17	19	21	61	10	0,45	4	80,75	**080**				
8	19	7,5	25	27	29	69	10	0,45	4			57,95	**080**		
8	38	7,5	44	46	48	88	10	0,45	4					117,50	**080**
10	13	9,5	21	21	23	63	10	0,45	4	71,61	**100**				
10	22	9,5	30	30	32	72	10	0,45	4			62,44	**100**		
10	45	9,5	53	53	55	95	10	0,45	4					123,00	**100**
12	16	11,5	26	26	28	73	12	0,60	4	88,13	**120**				
12	26	11,5	36	36	38	83	12	0,60	4			73,51	**120**		
12	53	11,5	63	63	65	110	12	0,60	4					138,00	**120**
14	16	11,5	26	26	28	73	12	0,60	4	112,00	**140**				
14	26	11,5	36	36	38	83	12	0,60	4			82,67	**140**		
14	53	11,5	63	63	65	110	12	0,60	4					158,50	**140**
16	19	15,0	29	29	31	79	16	0,70	4	117,50	**160**				
16	32	15,0	42	42	44	92	16	0,70	4			95,51	**160**		
16	63	15,0	73	73	75	123	16	0,70	4					185,80	**160**
18	19	15,0	29	29	31	79	16	0,70	4	153,10	**180**				
18	32	15,0	42	42	44	92	16	0,70	4			117,50	**180**		
18	63	15,0	73	73	75	123	16	0,70	4					226,90	**180**
20	22	19,0	36	36	38	88	20	0,70	4	158,50	**200**				
20	38	19,0	52	52	54	104	20	0,70	4			139,30	**200**		
20	75	19,0	89	89	91	141	20	0,70	4					263,70	**200**
22	38	19,0	52	52	54	114	20	0,70	4			176,40	**220**		
22	75	19,0	89	89	91	141	20	0,70	4					360,80	**220**
25	45	24,0	63	63	65	121	25	0,70	4			189,90	**250**		
25	90	24,0	108	108	110	166	25	0,70	4					422,20	**250**
28	45	24,0	63	63	65	121	25	0,90	5			288,30	**280**		
28	90	24,0	108	108	110	166	25	0,90	5					531,60	**280**
30	45	24,0	63	63	65	121	25	0,90	5			247,30	**300**		
30	90	24,0	108	108	110	166	25	0,90	5					579,40	**300**
32	53	31,0	70	70	73	133	32	0,90	6			295,20	**320**		
32	106	31,0	123	123	126	186	32	0,90	6					590,20	**320**

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 33–35

Ball nosed end milling cutter HSS-E Co 8



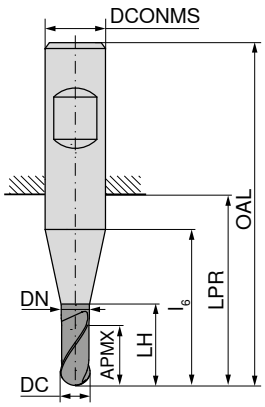

Ti100 Pro

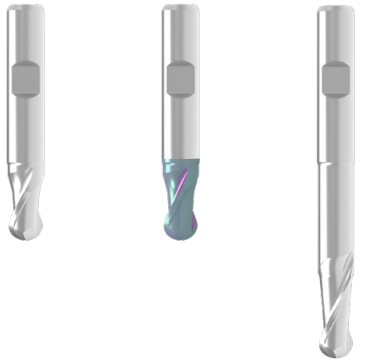

Factory standard | Factory standard | Factory standard

DC h10 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 320 ... EUR U8		54 041 ... EUR U8		50 321 ... EUR U8	
2	4		4	10	12	48	6	2	45,37	020	58,91	020		
3	5		5	11	13	49	6	2	42,78	030	57,95	030		
3	8		8	18	20	56	6	2					63,54	030
4	7		7	13	15	51	6	2	42,78	040	57,95	040		
4	11		11	25	27	63	6	2					63,54	040
5	8		8	14	16	52	6	2	42,78	050	57,95	050		
5	13		13	30	32	68	6	2					63,54	050
6	8	5,50	14	14	16	52	6	2	42,78	060	57,95	060		
6	13	5,50	30	30	32	68	6	2					67,08	060
7	10	6,50	16	18	20	60	10	2	57,78	070	84,58	070		
7	16	6,35	36	38	40	80	10	2					75,43	070
8	11	7,50	17	19	21	61	10	2	46,86	080	79,11	080		
8	19	7,35	44	46	48	88	10	2					68,44	080
9	11	8,50	18	19	21	61	10	2	54,24	090	89,21	090		
9	19	8,35	45	46	48	88	10	2					80,06	090
10	13	9,50	21	21	23	63	10	2	53,98	100	82,67	100		
10	22	9,35	53	53	55	95	10	2					85,67	100
11	13	10,50	21	23	25	70	12	2	62,71	110				
11	22	10,50	53	55	57	102	12	2					92,51	110
12	16	11,50	26	26	28	73	12	2	60,53	120	93,73	120		
12	26	11,50	63	63	65	110	12	2					87,17	120
13	16	11,50	26	26	28	73	12	2	69,68	130	134,20	130		
14	16	11,50	26	26	28	73	12	2	70,78	140	123,00	140		
14	26	11,50	63	63	65	110	12	2					101,30	140
15	16	11,50	26	26	28	73	12	2	82,52	150	147,60	150		
15	26	11,50	63	63	65	110	12	2					131,60	150
16	19	15,50	29	29	31	79	16	2	85,81	160	147,60	160		
16	32	15,00	73	73	75	123	16	2					131,80	160
18	19	15,50	29	29	31	79	16	2	107,00	180	176,40	180		
18	32	15,00	73	73	75	123	16	2					166,70	180
20	22	19,00	36	36	38	88	20	2	113,80	201	174,90	201		
22	22	19,00	36	36	38	88	20	2	146,20	220				
24	26	23,00	42	44	46	102	25	2	149,00	240	277,50	240		
24	45	23,00	106	108	110	166	25	2					247,30	240
25	26	24,00	44	44	46	102	25	2	149,00	250				
25	45	24,00	108	108	110	166	25	2					232,20	250
26	26	24,00	44	44	46	102	25	2	217,30	260				
28	26	24,00	44	44	46	102	25	2	205,00	280				
30	26	24,00	44	44	46	102	25	2	236,50	300				
30	45	24,00	108	108	110	166	25	2					336,10	300

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 33–35

13

T-slot milling cutter HSS-E Co 5, cross pitched

▲ For slots according to DIN 650



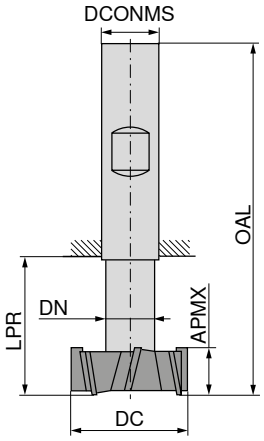

DIN 851 A

50 240 ...

DC d11 mm	APMX d11 mm	DN h12 mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U6	
11,0	4	4	13,5	53,5	10	6	104,70	**110**
12,5	6	5	17,0	57,0	10	6	101,30	**125**
16,0	8	7	22,0	62,0	10	6	111,90	**160**
18,0	8	8	25,0	70,0	12	6	117,40	**180**
19,0	9	8	26,0	71,0	12	6	142,10	**190** 1)
21,0	9	10	29,0	74,0	12	6	146,20	**210**
22,0	10	10	30,0	75,0	12	6	150,30	**220** 1)
25,0	11	12	34,0	82,0	16	8	176,40	**250**
28,0	12	13	37,0	85,0	16	8	211,80	**280** 1)
32,0	14	15	42,0	90,0	16	8	239,10	**320**
36,0	16	17	47,0	103,0	25	8	359,40	**360** 1)
40,0	18	19	52,0	108,0	25	10	404,40	**400**
45,0	20	21	57,0	113,0	25	10	449,60	**450** 1)
50,0	22	25	64,0	124,0	32	10	494,70	**500**
60,0	28	30	79,0	139,0	32	10	661,30	**600**

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) Factory standard

→ v_c/f_z Page 36

Slot milling cutter HSS-E Co 5, cross-pitched

▲ For slots according to DIN 6888
▲ CDX = $a_{p\ max.}$



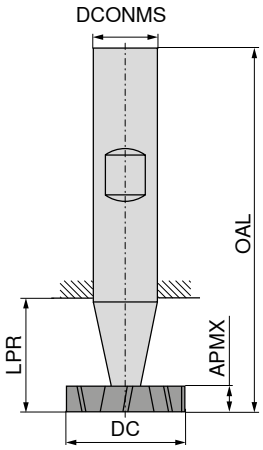

DIN 850

50 234 ...

DC h12 mm	APMX e8 mm	LPR mm	OAL mm	DCONMS h6 mm	CDX mm	ZEFP	EUR U6	
10,5	2,0	14	50	6	3,25	6	79,66	**100**
10,5	2,5	14	50	6	3,15	6	79,66	**101**
10,5	3,0	14	50	6	3,15	6	79,66	**102**
13,5	2,0	16	56	10	4,45	6	79,66	**130** 1)
13,5	3,0	16	56	10	4,45	6	79,66	**132**
13,5	4,0	16	56	10	4,45	6	79,66	**133**
16,5	3,0	16	56	10	5,95	6	86,78	**161**
16,5	4,0	16	56	10	5,95	6	86,78	**162**
16,5	5,0	16	56	10	5,75	6	86,78	**163**
19,5	3,0	23	63	10	6,95	8	95,63	**190** 1)
19,5	4,0	23	63	10	6,95	8	95,63	**191**
19,5	5,0	23	63	10	6,75	8	95,63	**192**
22,5	4,0	23	63	10	8,25	8	113,50	**220** 1)
22,5	5,0	23	63	10	8,25	8	113,50	**221**
22,5	6,0	23	63	10	8,00	8	113,50	**222**
25,5	5,0	23	63	10	9,00	10	113,50	**250** 1)
25,5	6,0	23	63	10	9,00	10	113,50	**251**
28,5	6,0	23	63	10	10,00	10	166,70	**281**
28,5	8,0	23	63	10	10,00	10	166,70	**283**
32,5	6,0	26	71	12	12,00	10	169,60	**321** 1)
32,5	8,0	26	71	12	12,00	10	169,60	**322**
38,5	8,0	26	71	12	13,35	10	251,50	**381** 1)
45,5	10,0	26	71	12	16,85	12	306,10	**450**

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) Factory standard

→ v_c/f_z Page 36

T-slot milling cutter HSS-E Co 5

▲ For slots according to DIN 650

NF | λ_s=20° γ_s=11°

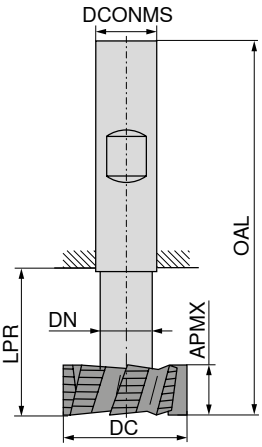

DIN 851 A

50 241 ...

DC d11 mm	APMX mm	DN h12 mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U6	
21	9	10	29	74	12	6	169,60	**210**
22	10	10	30	75	12	6	187,30	**220** 1)
25	11	12	34	82	16	6	202,20	**250**
28	12	13	37	85	16	6	221,40	**280** 1)
32	14	15	42	90	16	6	278,70	**320**
36	16	17	47	103	25	6	340,20	**360** 1)
40	18	19	52	108	25	8	439,90	**400**
45	20	21	57	113	25	8	460,40	**450** 1)

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) Factory standard

→ v_c/f_z Page 36

Quarter-round profile milling cutter HSS-E Co 5, concave



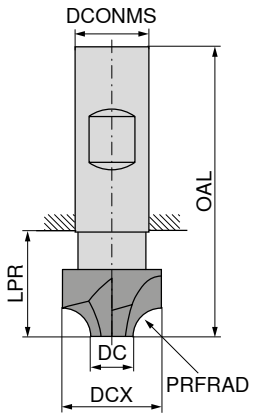

DIN 6518

50 248 ...

PRFRAD h11 mm	DCX mm	DC mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR U6	
1,0	8	6	20	60	10	4	61,36	**010**
1,5	9	6	20	60	10	4	75,02	**015**
2,0	10	6	20	60	10	4	69,54	**020**
2,5	11	6	20	60	10	4	78,30	**025**
3,0	12	6	15	60	12	4	71,18	**030**
4,0	14	6	15	60	12	4	92,09	**040**
5,0	16	6	15	60	12	4	95,63	**050**
6,0	20	8	19	67	16	4	124,70	**060**
8,0	24	8	23	71	16	4	166,70	**080**
9,0	26	8	29	85	25	4	176,40	**090**
10,0	28	8	29	85	25	4	203,50	**100**
12,0	34	10	34	90	25	4	310,20	**120**
15,0	46	16	44	100	25	6	426,20	**150**
16,0	48	16	44	100	25	6	501,60	**160**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 36

13

Single angle miling cutters HSS-E Co 5

H | λ_s=0° γ_s=0°







α°	DC mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	Fig.	DIN 1833 50 246 ... EUR U6		DIN 1833 50 245 ... EUR U6	
45	16	4,0	15	60	12	0,3	10	A			92,09	016
	16	4,0	15	60	12		10	B	104,70	016		
	20	5,0	18	63	12	0,3	10	A			133,70	020
	20	5,0	18	63	12		10	B	140,80	020		
	25	6,3	22	67	12	0,3	10	A			162,70	025
	25	6,3	22	67	12		10	B	162,70	025		
60	16	6,3	15	60	12	0,3	10	A			104,70	116
	16	6,3	15	60	12		10	B	104,70	116		
	20	8,0	18	63	12	0,3	10	A			133,70	120
	20	8,0	18	63	12		10	B	133,70	120		
	25	10,0	22	67	12	0,3	10	A			144,80	125
	25	10,0	22	67	12		10	B	162,70	125		
70	16	7,0	15	60	12	0,3	10	A			104,70	216 1)
	20	9,0	18	63	12	0,3	10	A			133,70	220 1)
	25	11,0	19	67	16	0,3	10	A			162,70	225 1)

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

1) Factory standard

→ v_c/f_z Page 37

Double angle milling cutter HSS

▲ with keyway to DIN 138

N | λ_s=0° γ_s=0°



DIN 847

50 360 ...

PNA °	DC mm	OAH mm	DCONMS mm	ZEFP	EUR U6	
45	50	8	16	22	169,60	045
	63	10	22	24	211,80	145
	80	12	27	26	336,10	245
	100	18	32	28	501,60	345
60	50	10	16	18	169,60	060
	63	14	22	20	211,80	160
	80	18	27	22	389,40	260
	100	25	32	24	624,40	360
90	50	14	16	16	198,20	090
	63	20	22	18	252,70	190
	80	22	27	20	414,10	290
	100	32	32	24	690,10	390
120	50	14	16	16	225,30	120 1)
	63	20	22	16	328,00	121 1)

P	●
M	○
K	●
N	○
S	○
H	
O	○

1) Factory standard

→ v_c/f_z Page 37

Shell type single angle milling cutter HSS

▲ with keyway to DIN 138

N | λ_s=0° γ_s=2°





DIN 842 A

50 362 ...

KAPR °	DC mm	OAH mm	DCONMS mm	CHW mm	ZEFP	EUR U6	
45	40	10	10	0,3	14	195,40	045
	50	13	13	0,3	16	267,80	145
	63	18	16	0,3	18	337,60	245
	80	22	22	0,3	20	476,80	345
	100	28	27	0,3	22	724,20	445
50	50	16	13	0,3	16	267,80	150
60	40	13	10	0,3	14	172,10	060
	50	16	13	0,3	16	211,80	160
	63	20	16	0,3	18	291,20	260
	80	25	22	0,3	20	476,80	360
	100	32	27	0,3	22	724,20	460
	125	40	32	0,3	28	1.193,00	560

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 37

13

Side and face milling cutter HSS-E Co 5

▲ Fine cross-pitched version
▲ with keyway to DIN 138





DIN 885 A

50 349 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U6	
50	4	16	16	155,80	100
50	5	16	16	155,80	102
50	6	16	16	166,70	104
50	8	16	16	176,40	106
50	10	16	16	194,00	108
63	4	22	18	170,90	200
63	5	22	18	181,60	202
63	6	22	18	174,90	204
63	8	22	18	196,80	206
63	10	22	18	220,10	208
63	12	22	18	248,70	210
63	14	22	18	280,10	212
80	5	27	20	229,60	300
80	6	27	20	236,50	302
80	8	27	20	247,30	304
80	10	27	18	251,50	306
80	12	27	18	284,30	308
80	14	27	18	329,30	310
80	16	27	18	356,60	312
80	18	27	18	412,60	314
80	20	27	18	412,60	316
100	6	32	22	332,00	400
100	8	32	22	329,30	402
100	10	32	20	355,20	404
100	12	32	20	382,50	406
100	14	32	20	426,20	408
100	16	32	20	452,30	410
100	18	32	20	527,40	412
100	20	32	20	531,60	414
100	25	32	20	658,70	418
125	8	32	24	438,60	500
125	10	32	22	469,90	502
125	12	32	22	508,30	504
125	14	32	22	571,00	506
125	16	32	22	593,10	508
125	18	32	22	684,40	510
125	20	32	22	695,60	512
125	25	32	22	833,50	516
160	10	40	26	699,60	600
160	12	40	26	762,30	602
160	14	40	26	819,90	604
160	16	40	26	882,60	606
160	18	40	26	970,10	608
160	20	40	26	971,50	610
160	25	40	26	1.209,00	614
160	32	40	26	1.520,00	618

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 38

Narrow side and face milling cutter HSS-E Co 5

▲ Fine cross-pitched version
▲ with keyway to DIN 138





DIN 1834 A

50 340 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U6	
63	1,6	22	28	134,40	200
63	2,0	22	28	115,90	202
63	2,5	22	28	118,30	204
63	3,0	22	28	121,30	206
80	1,6	27	32	139,30	300
80	2,0	27	32	136,10	302
80	2,5	27	32	138,00	304
80	3,0	27	32	142,10	306
80	4,0	27	32	153,10	310
100	1,6	32	36	169,60	400
100	2,0	32	36	168,00	402
100	2,5	32	36	168,00	404
100	3,0	32	36	170,90	406
100	4,0	32	36	181,60	410
100	5,0	32	36	199,50	414
125	1,6	32	40	220,10	500
125	2,0	32	40	211,80	502
125	2,5	32	40	218,60	504
125	3,0	32	40	222,70	506
125	4,0	32	40	236,50	510
125	5,0	32	40	252,70	514
125	6,0	32	40	280,10	516
160	2,0	40	48	349,70	600
160	2,5	40	48	337,60	602
160	3,0	40	48	343,00	604
160	4,0	40	48	366,10	606
160	5,0	40	48	385,40	608
160	6,0	40	48	416,70	610
160	8,0	40	36	472,80	612

P	●
M	
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 38

Face milling cutters HSS-E Co 5

▲ with keyway to DIN 138

N | λ_s=25° γ_s=10°





DIN 1880

50 250 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	8	217,30	040
50	36	22	8	284,30	050
63	40	27	8	390,80	063
80	45	27	10	590,20	080

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 39+40

Roughing face milling cutters HSS-E Co 5

▲ with keyway to DIN 138

▲ Manufacturing tolerance lies on the plus range of the tolerance js14

NR | λ_s=25° γ_s=10°





DIN 1880

50 260 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	7	221,40	040
50	36	22	8	292,40	050
63	40	27	8	393,50	063
80	45	27	10	552,10	080

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 39+40

Face milling cutters HSS-E Co 5

▲ with keyway to DIN 138

N | λ_s=25° γ_s=10°

Ti100 Pro





DIN 1880

54 035 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	8	310,20	040
50	36	22	8	397,70	050
63	40	27	8	504,10	063
80	45	27	10	752,90	080

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 39+40

Roughing-finishing face milling cutters HSS-E Co 8

▲ with keyway to DIN 138

▲ Manufacturing tolerance lies on the plus range of the tolerance js14

HR | λ_s=25° γ_s=10°



Ti100 Pro



DIN 1880

54 037 ...

DC mm	OAH mm	DCONMS mm	ZEFP	EUR U8	
40	32	16	7	310,20	040
50	36	22	8	388,00	050
63	40	27	8	599,80	063
80	45	27	10	880,00	080

P	●
M	●
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 39+40

13

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting speeds – slot, end milling and ball-nosed end milling cutters

Index	Kf f_z	uncoated	Ti100 Pro	Ti100 Pro	● 1st choice ○ suitable		
				Powder steel	Emulsion	Compressed air	MMS
		v_c (m/min)					
P.1.1	1,2	20	45	50	●		
P.1.2	1,2	20	45	50	●		
P.1.3	1,2	20	45	50	●		
P.1.4	1,0	15	30	35	●		
P.1.5	1,0	15	30	35	●		
P.2.1	1,2	20	40	45	●		
P.2.2	1,0	15	40	45	●		
P.2.3	0,8	15	30	35	●		
P.2.4	0,8	15	30	35	●		
P.3.1	1,0	15	30	35	●		
P.3.2	0,8	12	25	30	●		
P.3.3	0,8	10	20	25	●		
P.4.1	1,0	10	20	25	●		
P.4.2	1,0	10	20	25	●		
M.1.1	1,0	10	20	25	●		
M.2.1	0,9	7	15	20	●		
M.3.1	1,0	5	10	15	●		
K.1.1	1,0	18	35	40	●		
K.1.2	1,0	18	25	30	●		
K.2.1	1,0	15	30	35	●		
K.2.2	1,0	15	30	35	●		
K.3.1	1,0	15	35	40	●		
K.3.2	0,8	12	25	30	●		
N.1.1	1,9	150	240	260	●		
N.1.2	1,9	100	130	150	●		
N.2.1	1,8		100	140	●		
N.2.2	1,7		60	80	●		
N.2.3							
N.3.1	1,1		100	130	●		
N.3.2	1,2	30	60	80	●		
N.3.3	1,2	30	60	80	●		
N.4.1	1,8	90	140	160		●	
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1	1,0	10	15	25	●		
S.3.2	1,1	10	15	25	●		
S.3.3							
H.1.1							
H.1.2							
H.1.3							
H.1.4							
H.2.1							
H.3.1							
O.1.1	2,0	30	50	70	●		
O.1.2	2,0	20	25	40	●		
O.2.1							
O.2.2							
O.3.1	1,0		30	40	○		

13

For full slot milling reduce the cutting speed (Vc), indicated in this table by approx. 15 - 20%!

Kf fz = Correction factor for feed per tooth

Feed per tooth for HSS end mills

Appoximate values (in mm) for the feed per tooth (f_z)

	Finish milling						Rough machining					
	Peripheral milling										Full slot milling	
												
	f_z in mm		f_z in mm		f_z in mm		f_z in mm		f_z in mm		f_z in mm	
Ø DC mm	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated
2	0,008	0,009	0,008	0,009	0,008	0,009						
3	0,011	0,012	0,009	0,010	0,010	0,012						
4	0,017	0,018	0,013	0,014	0,014	0,015	0,015	0,016	0,013	0,014	0,011	0,012
5	0,024	0,026	0,014	0,015	0,018	0,020	0,019	0,021	0,016	0,018	0,014	0,016
6	0,032	0,035	0,015	0,017	0,022	0,024	0,024	0,027	0,020	0,022	0,018	0,019
8	0,047	0,051	0,020	0,022	0,029	0,032	0,032	0,036	0,027	0,030	0,024	0,026
10	0,065	0,072	0,026	0,028	0,037	0,041	0,042	0,047	0,035	0,039	0,031	0,034
12	0,084	0,091	0,031	0,034	0,044	0,049	0,051	0,057	0,043	0,047	0,037	0,041
14	0,100	0,106	0,037	0,041	0,054	0,059	0,063	0,069	0,053	0,058	0,045	0,050
16	0,111	0,121	0,042	0,046	0,061	0,067	0,072	0,079	0,060	0,066	0,052	0,057
18	0,126	0,136	0,048	0,053	0,070	0,077	0,084	0,093	0,071	0,078	0,061	0,067
20	0,141	0,151	0,052	0,057	0,076	0,083	0,092	0,101	0,077	0,084	0,066	0,073
22	0,160	0,166	0,059	0,065	0,085	0,094	0,104	0,114	0,087	0,096	0,075	0,082
25	0,170	0,188	0,065	0,072	0,095	0,104	0,117	0,129	0,098	0,108	0,084	0,093
28	0,196	0,210	0,075	0,083	0,109	0,120	0,136	0,150	0,114	0,125	0,098	0,108
32	0,212	0,240	0,086	0,094	0,124	0,137	0,157	0,173	0,131	0,145	0,113	0,125
36	0,224	0,240	0,099	0,109	0,144	0,159	0,170	0,194	0,142	0,162	0,126	0,140
40	0,240	0,240	0,108	0,119	0,157	0,173	0,184	0,202	0,154	0,169	0,132	0,146
45	0,240	0,240	0,108	0,119	0,157	0,173	0,200	0,220	0,170	0,180	0,140	0,160
50	0,240	0,240	0,108	0,119	0,157	0,173	0,200	0,220	0,170	0,180	0,140	0,160

Attention:
In the case of uncoated milling cutters climb milling is preferred to conventional milling. When using coated milling cutters climb milling is necessary in order to achieve optimum results.

Feed rate correction:
Please multiply the f_z value in the table above with the corresponding **correction factor Kf f_z** from the table on → **page 33.**

In general the following is valid:
f_z (milling) = f_z x Kf f_z
f_z (drilling) = f_z (milling) ÷ no. of teeth

Feed per tooth when milling parallel key slots with HSS slot drills

Appoximate values (in mm) for the feed per tooth (f_z)

	Full slot milling (in one cut)		Profile slot milling (internal profile milling)				Circular ramping			
										
			Roughing cut		Finishing cut					
	f_z in mm		f_z in mm				f_z in mm			
Ø DC mm	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated	uncoated	coated
2	0,005	0,006	0,005	0,006	0,008	0,009	0,003	0,003	0,002	0,002
3	0,009	0,010	0,009	0,010	0,015	0,016	0,004	0,005	0,003	0,003
4	0,012	0,013	0,012	0,013	0,022	0,024	0,006	0,007	0,004	0,004
5	0,016	0,017	0,016	0,017	0,030	0,033	0,008	0,009	0,005	0,006
6	0,020	0,022	0,020	0,022	0,039	0,043	0,010	0,011	0,007	0,007
8	0,026	0,029	0,026	0,029	0,055	0,061	0,013	0,014	0,009	0,010
10	0,034	0,037	0,034	0,037	0,075	0,082	0,017	0,019	0,011	0,012
12	0,040	0,044	0,040	0,044	0,093	0,101	0,020	0,022	0,013	0,015
14	0,049	0,054	0,049	0,054	0,117	0,118	0,024	0,027	0,016	0,018
16	0,056	0,062	0,056	0,062	0,135	0,135	0,028	0,031	0,019	0,021
18	0,065	0,072	0,065	0,072	0,151	0,151	0,033	0,036	0,022	0,024
20	0,071	0,078	0,071	0,078	0,167	0,167	0,035	0,039	0,024	0,026
22	0,080	0,088	0,080	0,088	0,184	0,184	0,040	0,044	0,027	0,029
25	0,089	0,098	0,089	0,098	0,208	0,208	0,044	0,049	0,030	0,033
28	0,103	0,113	0,103	0,113	0,233	0,233	0,051	0,056	0,034	0,037
32	0,118	0,130	0,118	0,130	0,260	0,260	0,060	0,065	0,040	0,043
36	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043
40	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043
45	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043
50	0,130	0,143	0,130	0,143	0,260	0,260	0,060	0,065	0,040	0,043

Attention:
In the case of uncoated milling cutters climb milling is preferred to conventional milling. When using coated milling cutters climb milling is necessary in order to achieve optimum results.

Feed rate correction:
Please multiply the f_z value in the table above with the corresponding **correction factor Kf f_z** from the table on → **page 33.**

In general the following is valid:
f_z (milling) = f_z x Kf f_z
f_z (drilling) = f_z (milling) ÷ no. of teeth

Cutting data standard values – Form cutters

Index	v_c (m/min)	50 241 ... Ø DC (mm) = 21–25	28–36	40–45	50 240 ... Ø DC (mm) = 11–16	18–22	25–32	36–45	50–60	v_c (m/min)	50 234 ... Ø DC (mm) = 10–17	19–26	28–33	33–46	50 248 ... Ø DCX (mm) = 8–11	12–24	26–34	46–48	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)			f_z (mm)						f_z (mm)				f_z (mm)						
P.1.1	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.1.2	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.1.3	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.1.4	22	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	22	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.1.5	22	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	22	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.2.1	22	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	22	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.2.2	28	0,07	0,1	0,12	0,015	0,03	0,03	0,03	0,04	28	0,02	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
P.2.3	20	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	20	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.2.4	20	0,06	0,08	0,1	0,015	0,03	0,03	0,03	0,04	20	0,02	0,03	0,035	0,045	0,025	0,055	0,08	0,1	●		
P.3.1																					
P.3.2																					
P.3.3																					
P.4.1	10	0,06	0,08	0,1	0,01	0,025	0,025	0,025	0,03	10	0,02	0,025	0,03	0,04	0,02	0,045	0,08	0,09	●		
P.4.2	10	0,06	0,08	0,1	0,01	0,025	0,025	0,025	0,03	10	0,02	0,025	0,03	0,04	0,02	0,045	0,08	0,09	●		
M.1.1	10	0,06	0,08	0,1	0,01	0,025	0,025	0,025	0,03	10	0,02	0,025	0,03	0,04	0,02	0,045	0,08	0,09	●		
M.2.1																					
M.3.1																					
K.1.1	28	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	24	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.1.2																					
K.2.1	22	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	22	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.2.2	20	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	20	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.3.1	15	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	15	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
K.3.2	15	0,07	0,1	0,12	0,015	0,03	0,025	0,04	0,035	15	0,025	0,03	0,04	0,05	0,03	0,06	0,1	0,12	●		
N.1.1	100	0,1	0,12	0,15	0,02	0,045	0,045	0,045	0,055	90	0,03	0,04	0,06	0,07	0,035	0,07	0,14	0,15	●		
N.1.2	100	0,1	0,12	0,15	0,02	0,045	0,045	0,045	0,055	90	0,03	0,04	0,06	0,07	0,035	0,07	0,14	0,15	●		
N.2.1	80	0,09	0,11	0,13	0,015	0,04	0,035	0,04	0,045	80	0,03	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.2.2	60	0,09	0,11	0,13	0,015	0,04	0,035	0,04	0,045	60	0,03	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.2.3																					
N.3.1	25	0,08	0,1	0,12	0,015	0,04	0,035	0,03	0,035	25	0,02	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.3.2	25	0,08	0,1	0,12	0,015	0,04	0,035	0,03		25	0,02	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.3.3	25	0,08	0,1	0,12	0,015	0,04	0,035	0,03		25	0,02	0,035	0,045	0,055	0,03	0,06	0,12	0,12	●		
N.4.1	70	0,1	0,12	0,15	0,018	0,04	0,03	0,035	0,045	70	0,03	0,035	0,05	0,06	0,025	0,06	0,1	0,12	●		
S.1.1																					
S.1.2																					
S.2.1																					
S.2.2																					
S.2.3																					
S.3.1	20	0,06	0,08	0,1	0,012	0,025	0,025	0,025	0,035	20	0,015	0,025	0,035	0,045	0,02	0,05	0,07	0,09	●		
S.3.2																					
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1	65	0,12	0,15	0,18		0,06	0,055	0,055	0,07	65	0,04	0,05	0,07	0,09	0,045	0,1	0,18	0,18	●		
O.1.2	80	0,12	0,15	0,18		0,06	0,055	0,055	0,07	80	0,04	0,05	0,07	0,09	0,045	0,1	0,18	0,18	●		
O.2.1																					
O.2.2																					
O.3.1																					

The cutting data depends largely on the external conditions, e.g. stability of the tools and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting data standard values – Form cutters

Index	v_c (m/min)	50 245 ... / 50 246 ... Ø DC (mm) = 16	20	25	v_c (m/min)	50 360 ... Ø DC (mm) = 50	63	80	100	50 362 ... Ø DC (mm) = 40–50	63	80	100	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		a_e = 3,2	a_e = 4	a_e = 5		a_e = 5	a_e = 6,3	a_e = 8	a_e = 10							
		f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1	28	0,01	0,015	0,018	22	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.1.2	28	0,01	0,015	0,018	22	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.1.3	28	0,01	0,015	0,018	22	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.1.4	22	0,01	0,015	0,018	20	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
P.1.5	22	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.2.1	22	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.2.2	28	0,01	0,015	0,018	22	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
P.2.3	20	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.2.4	20	0,01	0,015	0,018	20	0,01	0,01	0,015	0,02	0,005	0,008	0,01	0,012	●		
P.3.1																
P.3.2																
P.3.3																
P.4.1	10	0,007	0,01	0,012	10	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
P.4.2	10	0,007	0,01	0,012	10	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
M.1.1	10	0,007	0,01	0,012	10	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
M.2.1																
M.3.1																
K.1.1	24	0,01	0,012	0,015	19	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.1.2					12	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012			
K.2.1	22	0,01	0,012	0,015	15	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.2.2	20	0,01	0,012	0,015	12	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.3.1	15	0,01	0,012	0,015	16	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
K.3.2	15	0,01	0,012	0,015	13	0,008	0,01	0,012	0,018	0,005	0,008	0,01	0,012	●		
N.1.1	90	0,01	0,015	0,02										●		
N.1.2	90	0,01	0,015	0,02	70	0,012	0,015	0,02	0,024	0,008	0,012	0,014	0,018	●		
N.2.1	80	0,01	0,015	0,02	60	0,012	0,015	0,02	0,024	0,008	0,012	0,014	0,018	●		
N.2.2	60	0,01	0,015	0,02	60	0,012	0,015	0,02	0,024	0,008	0,012	0,014	0,018	●		
N.2.3																
N.3.1	25	0,01	0,015	0,02	20	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,012	●		
N.3.2	25	0,01	0,015	0,02	20	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,012	●		
N.3.3	25	0,01	0,015	0,02	20	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,012	●		
N.4.1	70	0,01	0,015	0,0175	45	0,01	0,012	0,015	0,018	0,005	0,008	0,01	0,01	●		
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1	20	0,008	0,01	0,015	20	0,008	0,01	0,012	0,016	0,005	0,007	0,009	0,012	●		
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1	65	0,018	0,02	0,025	60	0,015	0,02	0,025	0,03	0,008	0,012	0,018	0,022	●		
O.1.2	80	0,018	0,02	0,025	65	0,015	0,02	0,025	0,03	0,008	0,012	0,018	0,022	●		
O.2.1																
O.2.2																
O.3.1																

The cutting data depends largely on the external conditions, e.g. stability of the tools and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

13

Cutting data – side and face cutters

Index	v_c (m/min)	50 340 ... / 50 349 ... Ø DC (mm) = 50	63	80	100	125	160	Emulsion	Compressed air	MMS
		f (mm)						● 1st choice ○ suitable		
P.1.1	30	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
P.1.2	20	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
P.1.3	20	0,025–0,035	0,030–0,040	0,035–0,045	0,040–0,050	0,047–0,060	0,050–0,065	●		
P.1.4	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.1.5	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.2.1	20	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.2.2	20	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.2.3	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.2.4	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.3.1	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.3.2	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.3.3	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
P.4.1	10	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
P.4.2	10	0,020–0,030	0,025–0,035	0,030–0,040	0,035–0,045	0,040–0,050	0,045–0,100	●		
M.1.1	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
M.2.1	10	0,015–0,020	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	●		
M.3.1	8	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.1.1	20	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.1.2	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.2.1	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.2.2	15	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.3.1	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
K.3.2	18	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
N.1.1	150	0,030–0,037	0,037–0,045	0,045–0,050	0,050–0,060	0,060–0,067	0,067–0,075	●		
N.1.2	100	0,030–0,037	0,037–0,045	0,045–0,050	0,050–0,060	0,060–0,067	0,067–0,075	●		
N.2.1	80	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
N.2.2	40	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
N.2.3										
N.3.1	80	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
N.3.2	30	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060	●		
N.3.3	30	0,025–0,035	0,030–0,040	0,035–0,045	0,040–0,050	0,047–0,060	0,050–0,065	●		
N.4.1	90	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,047–0,055	0,050–0,060		●	
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1	10	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
S.3.2	10	0,020–0,025	0,025–0,030	0,030–0,035	0,035–0,040	0,040–0,045	0,045–0,050	●		
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1	30	0,040–0,050	0,050–0,060	0,060–0,070	0,070–0,080	0,080–0,090	0,090–0,100	●		
O.1.2	20	0,040–0,050	0,050–0,060	0,060–0,070	0,070–0,080	0,080–0,090	0,090–0,100	●		
O.2.1										
O.2.2										
O.3.1										

Feed correction factor (Kf f_z) for side and face cutters in relation to the cutting depth (a_e)

a_e	Kf f_z
0,05 x DC	1,4
0,1 x DC	1,0
0,15 x DC	0,8
0,2 x DC	0,7
0,25 x DC	0,6

Cutting data – face mills

Index	Kf f_z	50 250 ... / 50 260 ... uncoated v_c (m/min)	54 035 ... / 54 037 ... Ti100 Pro v_c (m/min)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	1,2	25	45	●		
P.1.2	1,2	20	40	●		
P.1.3	1,2	20	40	●		
P.1.4	1,0	15	30	●		
P.1.5	1,0	15	30	●		
P.2.1	1,2	20	40	●		
P.2.2	1,0	20	40	●		
P.2.3	0,8	10	20	●		
P.2.4	0,8	10	20	●		
P.3.1	1,0	15	30	●		
P.3.2	0,8	10	20	●		
P.3.3	0,8	10	20	●		
P.4.1	1,0	10	15	●		
P.4.2	1,0	10	15	●		
M.1.1	1,0	10	15	●		
M.2.1	0,9	7	15	●		
M.3.1	1,0	5	10	●		
K.1.1	1,0	20	30	●		
K.1.2	1,0	18	30	●		
K.2.1	1,0	18	30	●		
K.2.2	1,0	15	25	●		
K.3.1	1,0	18	30	●		
K.3.2	1,0	18	30	●		
N.1.1	1,5	150				
N.1.2	1,5	100				
N.2.1	1,3	80				
N.2.2	1,3	40				
N.2.3						
N.3.1	1,1	80	110	●		
N.3.2	1,2	30	60	●		
N.3.3	1,2	30	60	●		
N.4.1	1,3	90	120		●	
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1	1,0	10	15	●		
S.3.2	1,1	10	15	●		
S.3.3	0,8		10	●		
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1	2,0	30	50	●		
O.1.2	2,0	20	25	●		
O.2.1						
O.2.2						
O.3.1						

13

Feed per tooth for HSS face mills

Appoximate values (in mm) for the feed per tooth (f_z)

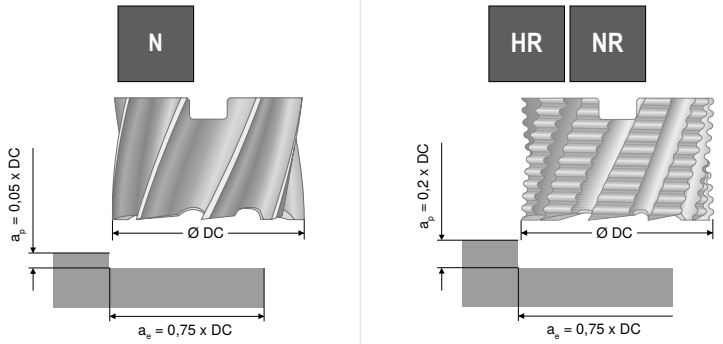

	f_z in mm		f_z in mm	
Ø DC mm	uncoated	Ti100 Pro	uncoated	Ti100 Pro
40	0,049	0,054	0,064	0,070
50	0,055	0,060	0,071	0,078
63	0,061	0,067	0,079	0,087
80	0,065	0,071	0,084	0,092

Feed rate correction:
Please multiply the f_z value in the table above with the corresponding **correction factor Kf f_z** from the table on → **page 33.**

In general the following is valid:
f_z (milling) = f_z x Kf f_z
f_z (drilling) = f_z (milling) ÷ no. of teeth

Formula for cutting data calculation

Designation	Abbreviation	Unit	Formula
Number of revolutions	n	min^{-1}	$n = \frac{v_C \times 1000}{DC \times \pi}$
Cutting speed	v_c	m/min	$v_c = \frac{DC \times \pi \times n}{1000}$
Feed per tooth	f_z	mm	$f_z = \frac{v_f}{ZEFP \times n}$ $f_z = h_m \times \sqrt{\frac{DC}{a_e}}$
Feed per revolution	f	mm	$f = f_z \times ZEFP$
Feed rate	v_f	mm/min.	$v_f = f_z \times ZEFP \times n$
Average chip thickness	h_m	mm	$h_m = f_z \times \sqrt{\frac{a_e}{DC}}$

ZEFP = Number of flutes
a_e = cutting width (for side milling cutter cutting depth)
DC = Cutting diameter

Version description

W	For soft materials and non-ferrous metals (aluminium, copper, brass)
N	For machining steel and cast materials, as well as stainless steels
H	For high-strength steels and tempered materials
NF	For machining steel and cast materials, as well as stainless steels – with roughing-finishing profile
HF	For high-strength steels and tempered materials – with roughing-finishing profile
NR	For machining steel and cast materials, as well as stainless steels – with roughing profile
HR	For high-strength steels and tempered materials – with roughing profile

Differences between the milling cutter types

Designation	Type	Shape of the chip breaker	Application description	Chip shape
Rough and finish milling cutters	NF HF	Chip breaker with flat profile 	▲ High chip volume, even on less powerful machines ▲ Surface quality mostly sufficient ▲ Lower cutting pressure compared to smooth-edged milling cutters ▲ Finish machining not needed	
Rough milling cutters	NR HR	Chip breaker with round profile 	▲ Produces very small and short chips ▲ Problem-solver in unstable conditions ▲ High chip volume, even on the weakest machines ▲ Exceptionally well suited to full slot milling ▲ Additional finish machining needed ▲ High feeds possible	

Coating

Ti100 Pro	▲ Ti multilayer coating ▲ $HV_{0.05}$ = 3500 ▲ Coefficient of friction (against steel) = 0.7 ▲ Maximum application temperature: 900°C

13

New products for machining technicians

NEW

MonsterMill – Ball Nosed Cutter

NCR

→ Page 39

Our specialist for 3D milling and machining of nickel-based alloys.

NEW

HPC-UNI end mill 3xDC

N

→ Page 242

New outstanding products in our standard range.

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters 14

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation 4
Toolfinder for High Performance Milling Cutters 5–9
List of contents 10–18
Product programme 19–320
Technical Information
Selection guide for cutters for plastic, fiberglass, carbon fibre 309
Cutting Data 321–485
Approximate feed rates 486
Trochoidal Milling 487
General references 488–496
Version description 497
Coatings 498

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Shank

Shank type

Length: extra short / short / medium / long / extra long

Axial thro' coolant

Radial thro' coolant

Cutting edge preparation

Sharp

Corner chamfer (CHW = chamfer width in mm)

Corner radius

Full Radius

Application

HPC — High volume machining

HFC — High-feed milling

54–70 HRC — Hard materials

Machining example

The red arrows describe the possible feed directions

λ_s=48°
γ_s=10°
Cutting geometry
λ_s = Helix Angle
γ_s = Rake Angle

λ_s var. — Variable helix angle

ZEFP = Number of flutes
● = **Main Application**
○ = Extended application

Toolfinder for High Performance Milling Cutters

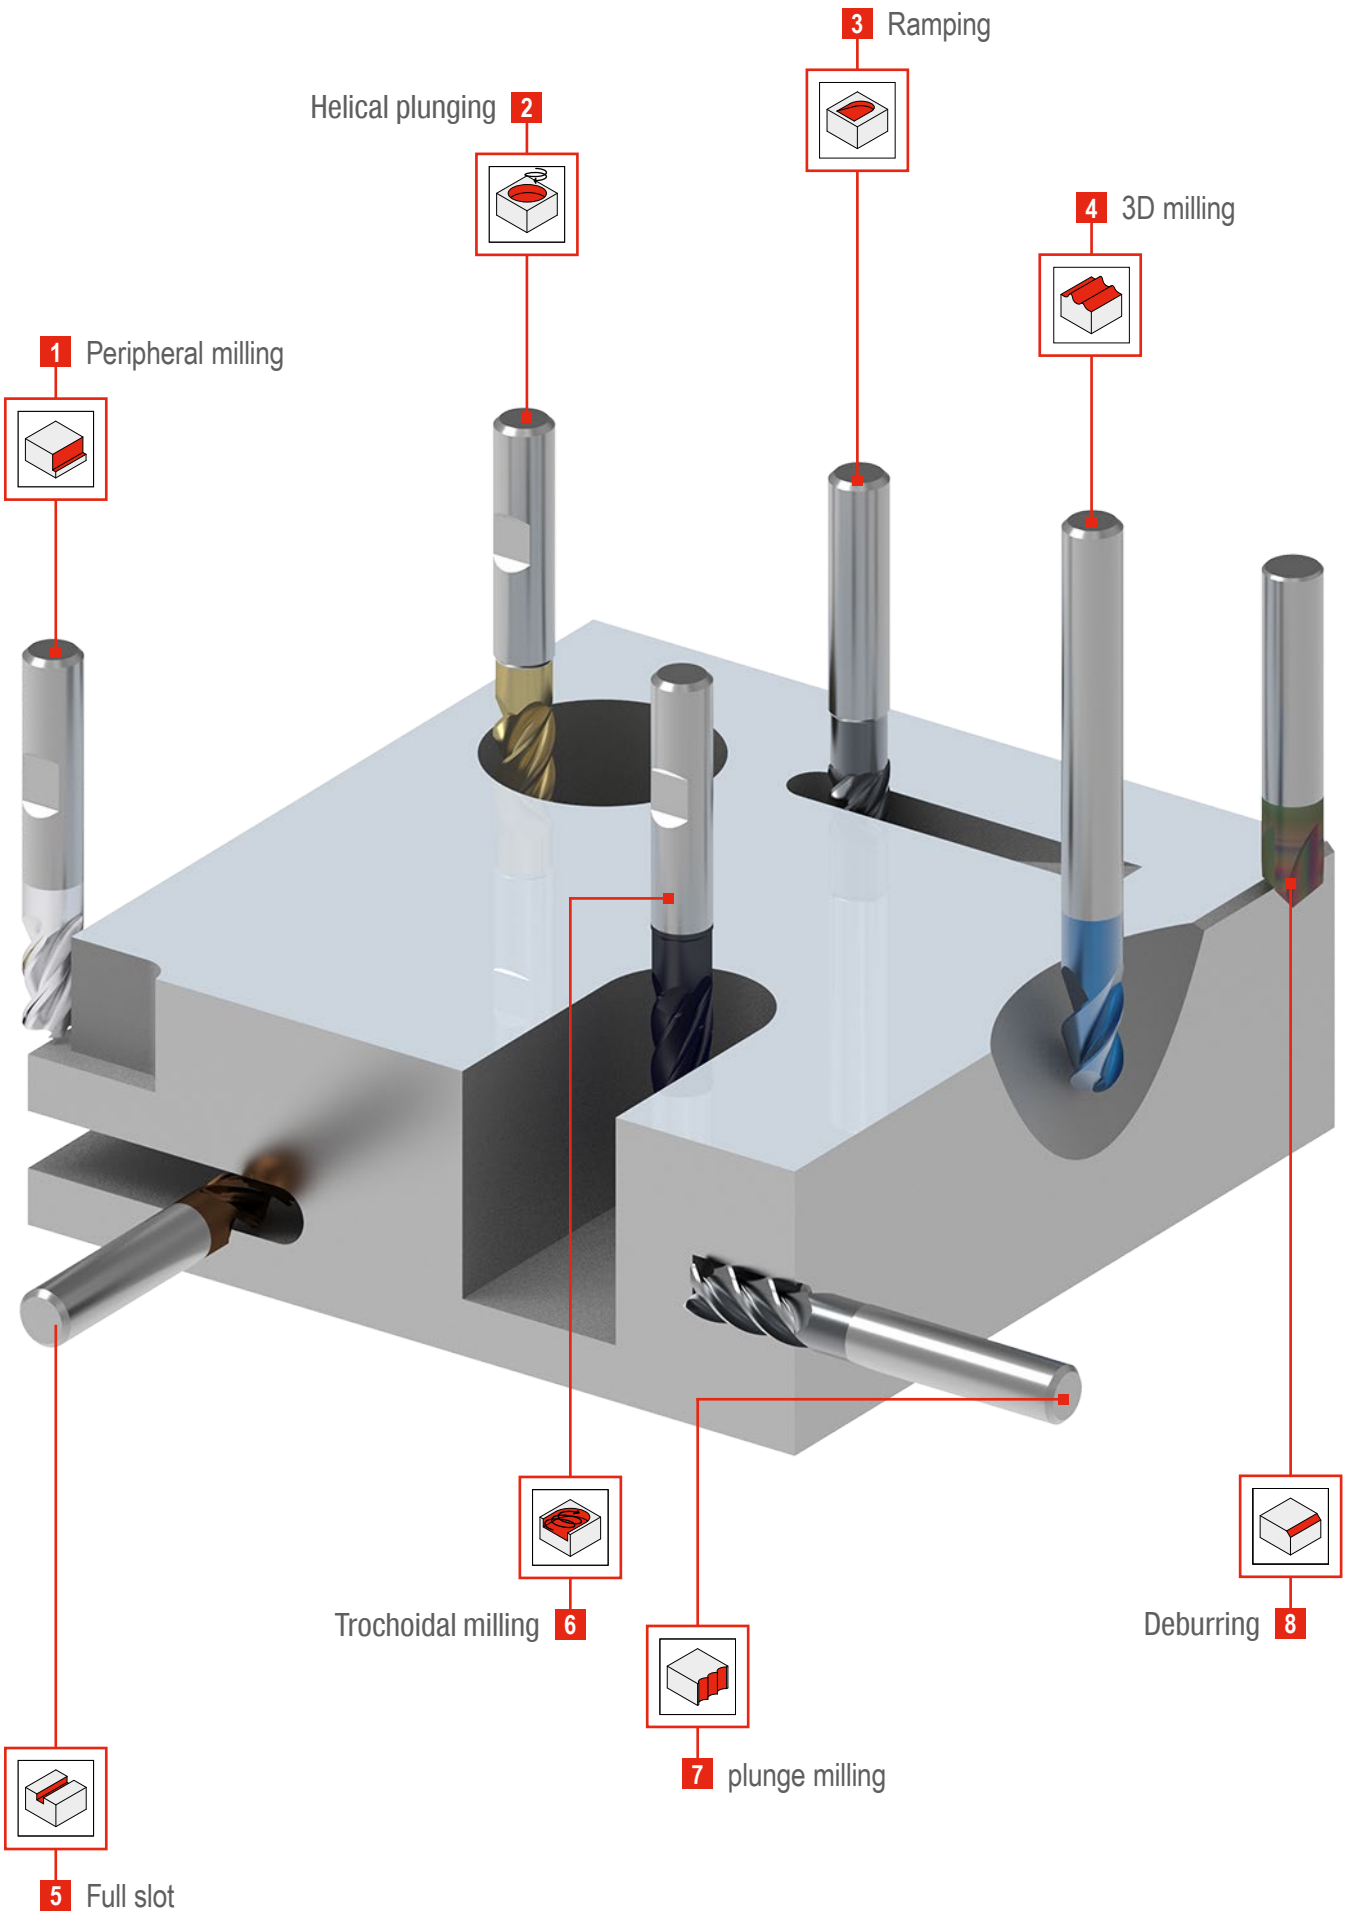

Toolfinder for high-performance milling cutters – MonsterMill

			1 Peripheral milling	2 Helical plunging	3 Ramping	4 3D milling
P	Steel		MonsterMill – SCR MonsterMill – PCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – SCR
M	Stainless steel		MonsterMill – ICR	MonsterMill – ICR	MonsterMill – ICR	MonsterMill – TCR
K	Cast iron		MonsterMill – SCR MonsterMill – PCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – SCR
N	Non-ferrous metals		MonsterMill – PCR	MonsterMill – PCR	MonsterMill – PCR	
S	Heat resistant alloys		MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR	MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR	MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR	MonsterMill – TCR MonsterMill – NCR
H	Tempered steel	< 55 HRC				
		> 55 HRC	MonsterMill – HCR			MonsterMill – HCR
O	Non-metal materials		MonsterMill – FRP / FRP CR	MonsterMill – FRP / FRP CR	MonsterMill – FRP / FRP CR	

MonsterMill – SCR

→ Page 19–26

The specialist for machining steel and cast iron

SCR



ZEFP	Ø DC mm
3–6	3–20

MonsterMill – ICR

→ Page 27+28

The specialist for machining stainless steel

ICR

ZEFP	Ø DC mm
3–5	1,5–20

MonsterMill – HCR

→ Page 40–45

The specialist for finish machining tempered steel up to 70 HRC

HCR



ZEFP	Ø DC mm
2–4	0,2–12

MonsterMill – PCR

→ Page 46–50

The specialist for ramping, plunging and helical milling

PCR

ZEFP	Ø DC mm
4	5–20

5 Full slot	6 Trochoidal milling	7 plunge milling	8 Deburring
MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR	MonsterMill – PCR	
MonsterMill – ICR			
MonsterMill – PCR MonsterMill – SCR MonsterMill – MCR	MonsterMill – PCR	MonsterMill – PCR	
MonsterMill – PCR	MonsterMill – PCR	MonsterMill – PCR	
MonsterMill – NCR MonsterMill – TCR MonsterMill – ICR			
MonsterMill – FRP / FRP CR			

MonsterMill – TCR

→ Page 29–33

The specialist for machining titanium and titanium alloys

TCR



ZEFP	Ø DC mm
2–5	2–20

MonsterMill – NCR

→ Page 34–39

The specialist for machining nickel-based alloys

NCR

ZEFP	Ø DC mm
4–5	2–20

MonsterMill – MCR

→ Page 51

The specialist for rough machining steel and cast iron

MCR



ZEFP	Ø DC mm
3–4	1–20

MonsterMill – FRP / FRP CR

→ Page 52–56

The specialist for machining carbon fibre-reinforced plastics

FRP

ZEFP	Ø DC mm
1–8	6–12,7

14

Toolfinder for high-performance milling cutters

			1 Peripheral milling	2 Helical plunging	3 Ramping	4 3D milling
P	Steel		SilverLine S-Cut Micro-milling tools MultiLock / MultiChange	MultiLock / MultiChange		3D Finish SilverLine Micro-milling tools MultiLock / MultiChange
M	Stainless steel		SilverLine S-Cut Micro-milling tools			3D Finish SilverLine Micro-milling tools
K	Cast iron		SilverLine S-Cut Micro-milling tools MultiLock / MultiChange	MultiLock / MultiChange	MultiLock / MultiChange	3D Finish SilverLine Micro-milling tools MultiLock / MultiChange
N	Non-ferrous metals		AluLine PCD milling tools Micro-milling tools MultiChange	AluLine PCD milling tools MultiChange	AluLine PCD milling tools MultiChange	3D Finish AluLine PCD milling tools Micro-milling tools MultiChange
S	Heat resistant alloys		Micro-milling tools MultiLock	MultiLock	MultiLock	3D Finish Micro-milling tools MultiLock
H	Tempered steel	< 55 HRC	BlueLine Micro-milling tools	BlueLine	BlueLine	BlueLine Micro-milling tools
		> 55 HRC				
O	Non-metal materials		PCD milling tools Micro-milling tools	PCD milling tools	PCD milling tools	3D Finish PCD milling tools Micro-milling tools

CircularLine

→ Page 57–76

The specialist for trochoidal machining

CCR

ZEFP: 4–6

Ø DC mm: 6–20

AluLine

→ Page 77–115

The specialist for machining non-ferrous metals

W / WF / WR



ZEFP: 2–6

Ø DC mm: 2–25

S-Cut

→ Page 151–155

The all-rounder with soft cut and low power consumption

SC UNI

ZEFP: 4–5

Ø DC mm: 3–25

3D Finish

→ Page 156–160

The specialist for 3D finish machining

N

ZEFP: 2–4

Ø DC mm: 4–16

MultiLock

→ Page 193–196

The sustainable exchangeable head system

N

ZEFP: 4–6

Ø DC mm: 12–25

MultiChange

→ Page 197–202

The exchangeable head system for the highest demands and a wide range of applications

PCR W N

ZEFP: 3–6

Ø DC mm: 8–20

	5 Full slot	6 Trochoidal milling	7 plunge milling	8 Deburring
	S-Cut SilverLine Micro-milling tools MultiLock / MultiChange	CircularLine		SilverLine MultiLock MultiChange
	S-Cut SilverLine Micro-milling tools	CircularLine		SilverLine
	S-Cut SilverLine Micro-milling tools MultiLock / MultiChange	CircularLine		SilverLine MultiLock MultiChange
	AluLine PCD milling tools Micro-milling tools MultiChange	CircularLine	PCD milling tools	AluLine MultiChange
	Micro-milling tools MultiLock	CircularLine		SilverLine
	BlueLine Micro-milling tools	CircularLine		BlueLine
		CircularLine		BlueLine
	PCD milling tools Micro-milling tools		PCD milling tools	AluLine

PCD milling tools
→ Page 116–128

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

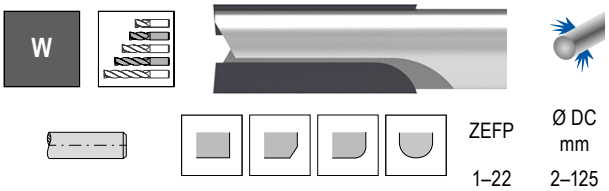

ZEFP	Ø DC mm
1–22	2–125

SilverLine
→ Page 129–150

The all-rounder for universal application

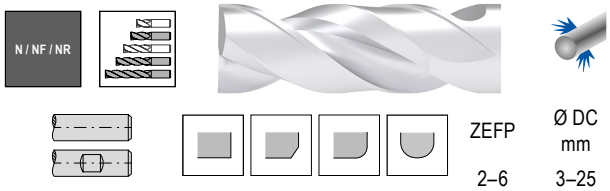

ZEFP	Ø DC mm
2–6	3–25

BlueLine
→ Page 161–185

The all-rounder for machining tempered steel

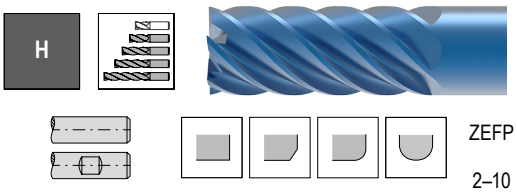

ZEFP	Ø DC mm
2–10	0,1–20

Micro-milling tools
→ Page 186–192

The universal milling cutter for micro-cutting

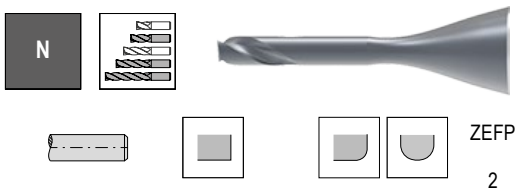

ZEFP	Ø DC mm
2	0,2–2,0

14

Overview High Performance Milling Cutters

Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
MonsterMill																			
SCR	4–6	3–20	●	○	●	○	○	○	○			■		■	HPC		■		19–24
SCR	3–4	3–16	●	○	●	○	○	○	○				■	■	HPC		■		25
SCR	4	3–16	●		●				○			■		■	HPC HFC	■	■		26
ICR	3–5	1,5–20	○	●	○	○	●	○	○		■			■	HPC	■	■		27+28
TCR	4–5	4–20	○	○			●					■		■	HPC		■		29–31
TCR	4	2–16	○	○			●						■	■			■		32
TCR	2–5	2–16	○	○			●					■		■	HPC HFC		■		33
NCR	4–5	4–20		○			●					■		■	HPC		■		34–38
NCR	4	2–16		○			●						■	■			■		39
HCR	2–4	0,2–12	○					●				■		■			■		40–42
HCR	2–4	0,2–12	○					●					■	■			■		43–45
PCR UNI	4	5–20	●	○	●							■		■	HPC		■		46–48
PCR ALU	4	5–20				●						■		■	HPC		■		49+50
MCR	3–4	1–20	●	○	●	○	○	○			■			■	HPC		■		51
FRP CR		6,0–12,7							●		■			■			■		52+53
FRP	8	6,0–12,7							●		■			■			■		54–56
CircularLine																			
CCR UNI	5–6	6–20	●	○	●		○				■	■		■	HPC		■		57–66
CCR VA	5–6	6–20	○	●			●					■		■	HPC		■		67+68
CCR AL	4	6–20				●					■	■		■			■		69–74
CCR Ti	5	6–20	○	○			●					■		■	HPC		■		75
CCR H	6	6–20						●				■		■			■		76

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
AluLine																				
	W	2	2–20				●													77–82
	W	3	2–20				●													83–90
	W	3	2–20				●									HPC				91–97
	W	3	6–20				●													98–100
	W	4	2–25				●													101–106
	WF	3	3–20				●													107
	WR	3	6–20				●									HPC				108+109
	W	6	6–20				●									HPC				110
	W	2	3–20				●			○										111–113
	W	4	4–16				●			●										114+115
PCD milling tools																				
	W	1–4	2–20				●			●										116–118
	W	1–2	2–20				●			●										119
	W	1–2	2–20				●			●										120+121
	W	4–10	10–32				●			●						HPC				122
	W	3	16–25				●			●										123
	W	2–3	10–25				●			●										124
	W	2–6	10–32				●			●										125
	W	4–10	10–32				●			●						HPC				126
	W	2–3	10–16				●			●										127
	W	10–22	40–125				●			●										128

14

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
SilverLine																				
	N	2	3–20	●	●	●	○	●			■	■			■	HPC		■		129+130
	N	3	3–20	●	●	●	○	●			■	■	■		■	HPC		■		131–133
	N	4	3–20	●	●	●	○	●				■			■	HPC		■		134–136
	N	4	6–20	●	●	●	○	●				■			■	HPC	■	■		137
	N	4–5	3–20	●	●	●	○	●				■	■		■	HPC		■		138–142
	NF	4	3–20	●	●	●	○	●				■			■	HPC		■		143
	NR	4	3–20	●	●	●	○	●				■			■	HPC		■		144
	N	6	6–25	●	●	○	○	●			■				■			■		145
	N	2	3–20	●		●	○		○					■	■			■		146
	N	4	4–20	●	○	●	○							■	■			■		147
	N	4	6–20	●	○	●	○		○				■		■	HPC HFC		■		148
	N	5	4–16	●	●	●		●										■	□	149+150
S-Cut																				
	SC UNI	4	3–25	●	●	●	○	○	○		■	■	■		■	HPC		■		151–153
	SC UNI	5	6–20	●	●	●		○				■			■	HPC		■		154
	SC NR	4	3–20	●	●	●	○	○	○			■			■	HPC		■		155
3D Finish																				
	N	4	10	●	●	●	●	●	○	●					■			■		156
	N	3–4	6–16	●	●	●	●	●	○	●					■			■		157
	N	3	6–16	●	●	●	●	●	○	●					■			■		158
	N	2	10	●	●	●	●	●	○	●					■			■		159
	N	3	4–12	●	●	●	●	●							■			■		160

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
BlueLine																				
	H	2	0,2–3	●					●		■				■			■		161–163
	H	2	0,2–3	●					●					■	■			■		164–166
	H	2	0,4–3	●					●				■		■			■		167–169
	H	2	0,5–20	●					●			■			■			■		170
	H	4–6	1–20	●					●				■		■			■		171–173
	H	4–10	2–20	●					●		■		■		■			■		174+175
	H	2	0,1–20	○					●					■	■			■		176–179
	H	3	3–12	●					●					■	■			■		180
	H	4	2–20	○					●					■	■			■		181
	H	2	0,5–16	○					●				■		■			■		182–184
	H	5–8	4–16	●					●						■			■		185
Micro-milling tools																				
	N	2	0,2–2	●	●	●	●	●	○	○	■				■			■		186+187
	N	2	0,2–2	●	●	●	●	●	○	○				■	■			■		188–190
	N	2	0,5–2	●	●	●	●	●	○	○			■		■			■		191+192

14

Overview High Performance Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Performance
MultiLock – exchangeable head system																				
	N	4	12–25	●	○	●	○	●						◡					☐	193
	N	4–6	12–25	●	○	●	○	●					◡				✓		☐	193
	N	5–6	12–25	●	○	●		●					◡			HFC	✓		☐	194
	N	4	12–16	●	○	●	○												☐	194
MultiLock – Adapters and holders																				
																				195+196
MultiChange – exchangeable head system																				
	PCR	4	10–20	●	○	●	●						◡			HPC			☐	198
	W	3	10–20				●						◡						☐	198
	N	3–4	8–20	●		●						◡				HPC			☐	199
	N	4–6	8–20	●	○	●	●					◡							☐	199
	N	6	8–20	●	○	●					◡								☐	200
	N	4	10–20	●	○	●	●			○				◡					☐	200
	N	4	8–20	●	○	●	●			○			◡						☐	200
	N	6	8–20	●	○	●							◡			HFC	✓		☐	201
	N	4	8–20	●	○	●	●												☐	201
	N	4–6	10–20	●	○	●	●												☐	202

End Mills Overview

Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
End Mills with Finishing Geometry																			
W	2	0,2–6,0				●					■			■			■		203+204
W	2	2,7–25				●			●	■	■	■		■	HPC			■	205–211
W	3	3–25				●				■		■		■	HPC			■	212–214
W	4	6–20				●				■				■	HPC			■	215+216
W	5–7	6–20				●				■				■	HPC			■	217
N	2	0,2–20	●	○	●	○	○	○	○	■	■			■			■	■	218–225
N	3	3–20	○	●	○	○	●		○	■				■				■	226
N	3	0,5–20	●	●	●	●	●	○	●	■	■			■			■	■	227–233
N	4	1,5–25	●	○	●	○	○	○	○	■	■			■	HPC		■	■	234–237
N	4	2–12	○	●	○	●	●		●			■		■	HPC		■		238
N	4	3–20	●	○	●	○	○	○	○			■		■			■		239
N	4	3–20	●	●	●	○	●			■	■	■		■	HPC		■		240–245
N	6–8	4–32	●	●	●	●	●		●	■	■	■		■			■	■	246–249
N	8–16	6–20	○	●	○	●	●		●	■				■			■		250
H	4	4–20	●					●			■	■		■			■		251
H	6–8	4–25	●	●	○	●	●	●	●	■	■			■			■		252+253
End Mills with Roughing and Finishing Geometry																			
WF	4	5–20				●	○		●		■			■			■		254
NTR	3–4	6–20	●	○	●	○					■			■			■		255

14

Overview of end milling, ball-nosed and torus cutters

Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
End Mills with Roughing Geometry																			
NR	4–6	4–25	●	●	●	○	●		○		■			■	HPC	■	■		256–258
HR	4–5	6–25	●	●	●						■			■		■	■		259–261
Ball Nosed End Mills with Finishing Geometry																			
W	2	0,5–12				●	○		●				■	■				■	262
W	2	0,2–6				●							■	■			■		263+264
W	2	3–20				●							■	■	HPC			■	265
W	2	0,5–12				●			●				■	■			■		266+267
N	2	0,1–20	●	○	●	○	○	○	○				■	■			■	■	268–273
N	2	1–12	●	○	●	○	○	○	○				■	■			■		274
N	2	3–20	●	●	○	●	○						■	■	HPC		■		275
N	4	3–20	●	●	●	●	●	○	●				■	■	HPC		■		276–278
H	2	0,2–20	●	○	●	○	○	○	○				■	■			■		279–280
Torus Milling Cutters with Finishing Geometry																			
W	2	0,2–12				●						■		■			■		281–284
 W	2	2–12				●			●			■		■			■		285
W	4	4–12				●			●			■		■			■		286+287
N	2	0,5–16	●	○	●	○	○	○	○			■		■			■		288
H	2	0,4–12	●	○	●	○	○	○	○			■		■			■		289–292
H	4–8	3–16	●		○			●				■		■			■		293

Overview Special Milling Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
Intermediate Size Torus End Mills																				
	H	4	7–17	○	●	○	●	●		●			■		■			■		294
Form / Chamfering and Die Sinking / Deburring Cutters																				
	W	1	3–6	○	○	○	●	○		●									□	295
	N	4	4–12	●	○	●	○	○	○	●								■	□	296
	N	4	3–12	●	○	●	○	○	○	●								■	□	297
	N	4	6–10	●	○	●	○	○	○	●								■		298
	N	6–10	11–40	●	○	●												■		299
			3–16																□	300+301
Circular saw blades																				
		24–160	15–200	●	●	●	●	●		●								■		302–304
		20–80	15–200	●	●	●	●	●		●								■		305–307
Cylindrical shank adapter for circular saw blades																				
																				308

14

Overview Special Milling Cutters

Plastics-GFK-CFK- Cutters

	Tool type	Number of flutes ZEFP	Diameter in mm Ø DC	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O	Sharp	Corner chamfer	Corner radius	Full Radius	Length	Tool design	Cooling	coated	uncoated	WNT \ Standard
	W		2–20							●									☐	310
	W		2–20							●									☐	311
	W		2–20							●								☐		312
	W		5–16							●	☐							☐		313
	W		6–24							●	☐							☐		314
	W	2	2–12				●			●								☐		315
	W	1	1,5–16,0				●			●									☐	316
	W	1	1,5–12,0				●			●								☐		317
	W	2	2–12				●			●								☐		318
	W	3	3–12				●			●				☐				☐		319
	N	2	2–12	●	○	●	○	○		●									☐	320

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



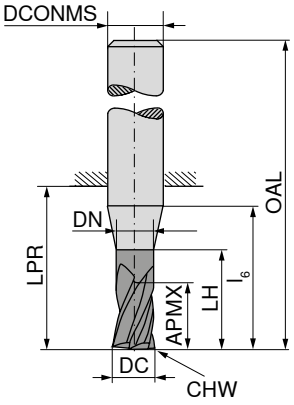

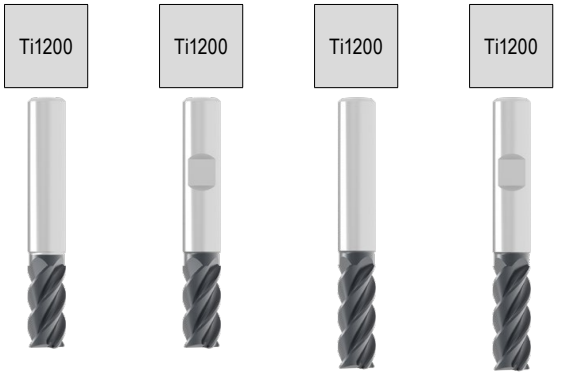

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	52 600 ... EUR V2		52 601 ... EUR V2		52 602 ... EUR V2		52 603 ... EUR V2	
3,0	5	2,9	9	14	14	50	6	0,07	4	54,45	030	54,45	030				
3,0	8	2,9	14	20	22	58	6	0,07	4					54,45	030	54,45	030
3,5	5	3,4	9	14	14	50	6	0,07	4	54,45	035	54,45	035				
3,5	8	3,4	14	20	22	58	6	0,07	4					54,45	035	54,45	035
4,0	8	3,8	12	18	18	54	6	0,07	4	54,45	040	54,45	040				
4,0	11	3,8	18	20	22	58	6	0,07	4					54,45	040	54,45	040
4,5	9	4,3	12	18	18	54	6	0,07	4	55,48	045	55,48	045				
4,5	13	4,3	18	20	22	58	6	0,07	4					55,48	045	55,48	045
5,0	9	4,8	16	18	18	54	6	0,07	4	55,48	050	55,48	050				
5,0	13	4,8	19	20	22	58	6	0,07	4					55,48	050	55,48	050
5,5	9	5,3	16	18	18	54	6	0,07	4	53,73	055	53,73	055				
5,5	13	5,3	19	20	22	58	6	0,07	4					53,73	055	53,73	055
6,0	10	5,8		16	18	54	6	0,07	4	53,73	060	53,73	060				
6,0	13	5,8		20	22	58	6	0,07	4					53,73	060	53,73	060
6,5	12	6,3	18	20	23	59	8	0,07	4	71,55	065	71,55	065				
6,5	19	6,3	23	25	28	64	8	0,07	4					71,55	065	71,55	065
7,0	12	6,8	18	20	23	59	8	0,07	4	71,55	070	71,55	070				
7,0	19	6,8	23	25	28	64	8	0,07	4					71,55	070	71,55	070
7,5	12	7,3	18	20	23	59	8	0,12	4	71,55	075	71,55	075				
7,5	19	7,3	23	25	28	64	8	0,12	4					71,55	075	71,55	075
8,0	12	7,7		20	23	59	8	0,12	4	71,55	080	71,55	080				
8,0	19	7,7		25	28	64	8	0,12	4					71,55	080	71,55	080
8,5	15	8,2	22	24	27	67	10	0,20	4	93,43	085	93,43	085				
8,5	22	8,2	28	30	33	73	10	0,20	4					93,43	085	93,43	085
9,0	15	8,7	22	24	27	67	10	0,20	4	93,43	090	93,43	090				
9,0	22	8,7	28	30	33	73	10	0,20	4					93,43	090	93,43	090
9,5	15	9,2	22	24	27	67	10	0,20	4	93,43	095	93,43	095				
9,5	22	9,2	28	30	33	73	10	0,20	4					93,43	095	93,43	095
10,0	15	9,5		24	27	67	10	0,20	4	93,43	100	93,43	100				
10,0	22	9,5		30	33	73	10	0,20	4					93,43	100	93,43	100
11,0	18	10,5	24	26	28	73	12	0,20	4	147,70	110	147,70	110				
11,0	26	10,5	32	35	39	84	12	0,20	4					147,70	110	147,70	110
11,5	18	11,0	24	26	28	73	12	0,20	4	147,70	115	147,70	115				
11,5	26	11,0	32	35	39	84	12	0,20	4					147,70	115	147,70	115
12,0	18	11,5		26	28	73	12	0,20	4	147,70	120	147,70	120				
12,0	26	11,5		35	39	84	12	0,20	4					147,70	120	147,70	120
14,0	21	13,5		28	30	75	14	0,20	4	189,80	140	189,80	140				
14,0	26	13,5		35	39	84	14	0,20	4					189,80	140	189,80	140
15,0	24	14,5	30	32	35	83	16	0,20	4	233,30	150	233,30	150				
15,0	32	14,5	38	40	45	93	16	0,20	4					233,30	150	233,30	150

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 322+323

14

Continued on next page

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



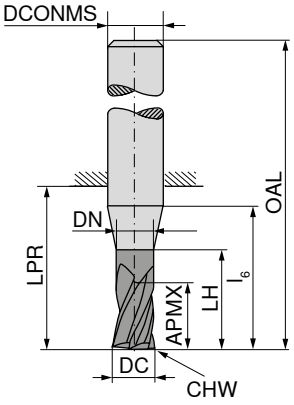



DIN 6527

52 600 ...

DIN 6527

52 601 ...

DIN 6527

52 602 ...

DIN 6527

52 603 ...

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	EUR V2		EUR V2		EUR V2		EUR V2	
16,0	24	15,5		32	35	83	16	0,20	4	233,30	**160**	233,30	**160**				
16,0	24	15,5		32	35	83	16	0,20	5	247,80	**161** [1]	247,80	**161** [1]				
16,0	32	15,5		40	45	93	16	0,20	5					247,80	**161** [1]	247,80	**161** [1]
16,0	32	15,5		40	45	93	16	0,20	4					233,30	**160**	233,30	**160**
17,0	32	16,5	48	50	52	100	18	0,20	4							317,30	**170**
18,0	27	17,5		34	37	85	18	0,20	5	336,10	**181** [1]	336,10	**181** [1]				
18,0	27	17,5		34	37	85	18	0,20	4	317,30	**180**	317,30	**180**				
18,0	32	17,5		50	52	100	18	0,20	5					336,10	**181** [1]	336,10	**181** [1]
18,0	32	17,5		50	52	100	18	0,20	4					317,30	**180**	317,30	**180**
19,0	38	18,5	48	50	54	104	20	0,30	4							360,80	**190**
19,5	38	19,0	48	50	54	104	20	0,30	4							360,80	**195**
20,0	30	19,5		40	43	93	20	0,30	5	381,00	**201** [1]	381,00	**201** [1]				
20,0	30	19,5		40	43	93	20	0,30	4	360,80	**200**	360,80	**200**				
20,0	38	19,5		50	54	104	20	0,30	4					360,80	**200**	360,80	**200**
20,0	38	19,5		50	54	104	20	0,30	5					381,00	**201** [1]	381,00	**201** [1]

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 322+323

MonsterMill – End milling cutter

The specialist for machining steel and cast iron





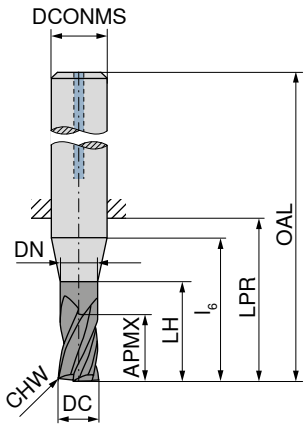

Ti1200

DIN 6527

52 606 ...

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	EUR V2	
3	8	2,9	14	20	22	58	6	0,07	4	66,79	**030**
4	11	3,8	18	20	22	58	6	0,07	4	66,79	**040**
5	13	4,8	19	20	22	58	6	0,07	4	67,80	**050**
6	13	5,8		20	22	58	6	0,07	4	65,75	**060**
8	19	7,7		25	28	64	8	0,12	4	86,05	**080**
10	22	9,5		30	33	73	10	0,20	4	110,70	**100**
12	26	11,5		35	39	84	12	0,20	4	175,30	**120**
16	32	15,5		40	45	93	16	0,20	4	297,00	**160**
20	38	19,5		50	54	104	20	0,30	4	476,70	**200**

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 322+323

14

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



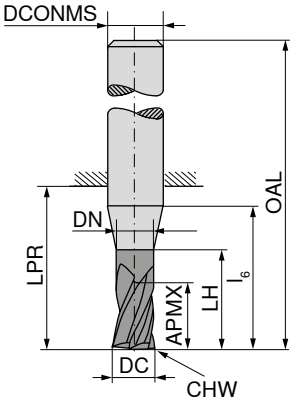

Factory standard

Factory standard

DC $_{f8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	CHW mm	ZEFP	52 604 ... EUR V2		52 605 ... EUR V2	
3	5	2,9	14	20	22	58	6	0,07	4	54,45	**030**		
3	5	2,9	19	23	26	62	6	0,07	4			63,44	**030**
4	8	3,8	18	20	22	58	6	0,07	4	54,45	**040**		
4	8	3,8	23	25	26	62	6	0,07	4			63,44	**040**
5	9	4,8	19	20	22	58	6	0,07	4	55,48	**050**		
5	9	4,8	24	25	26	62	6	0,07	4			64,73	**050**
6	10	5,8		20	22	58	6	0,07	4	53,73	**060**		
6	10	5,8		25	26	62	6	0,07	4			62,86	**060**
8	12	7,7		25	28	64	8	0,12	4	71,55	**080**		
8	12	7,7		30	32	68	8	0,12	4			83,14	**080**
10	15	9,5		30	33	73	10	0,20	4	93,43	**100**		
10	15	9,5		35	40	80	10	0,20	4			107,50	**100**
12	18	11,5		35	39	84	12	0,20	4	147,70	**120**		
12	18	11,5		45	48	93	12	0,20	4			169,60	**120**
14	21	13,5		35	39	84	14	0,20	4	189,80	**140**		
14	21	13,5		50	54	99	14	0,20	4			228,80	**140**
16	24	15,5		40	45	93	16	0,20	4	233,30	**160**		
16	24	15,5		40	45	93	16	0,20	5	247,80	**161** [1]		
16	24	15,5		55	60	108	16	0,20	4			276,60	**160**
16	24	15,5		55	60	108	16	0,20	5			291,20	**161** [1]
18	27	17,5		50	52	100	18	0,20	4	317,30	**180**		
18	27	17,5		50	52	100	18	0,20	5	336,10	**181** [1]		
18	27	17,5		60	66	114	18	0,20	4			392,70	**180**
18	27	17,5		60	66	114	18	0,20	5			412,80	**181** [1]
20	30	19,5		50	54	104	20	0,30	4	360,80	**200**		
20	30	19,5		50	54	104	20	0,30	5	381,00	**201** [1]		
20	30	19,5		70	76	126	20	0,30	4			440,50	**200**
20	30	19,5		70	76	126	20	0,30	5			462,10	**201** [1]

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 322–325

MonsterMill – End milling cutter with corner radius

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



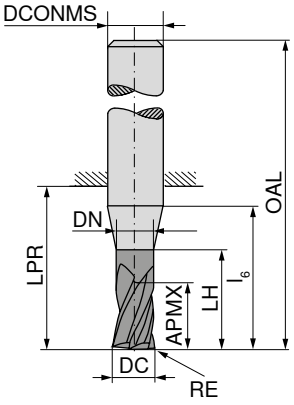

Ti1200

Factory standard

52 607 ...

DC $_{f8}$ mm	RE $_{\pm 0,01}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	EUR V2	
3	0,10	8	2,9	14	20	22	58	6	4	61,73	030
3	0,30	8	2,9	14	20	22	58	6	4	61,73	031
3	0,50	8	2,9	14	20	22	58	6	4	61,73	032
4	0,10	11	3,8	18	20	22	58	6	4	61,73	040
4	0,40	11	3,8	18	20	22	58	6	4	61,73	041
4	0,50	11	3,8	18	20	22	58	6	4	61,73	042
5	0,10	13	4,8	19	20	22	58	6	4	63,01	050
5	0,50	13	4,8	19	20	22	58	6	4	63,01	051
5	1,00	13	4,8	19	20	22	58	6	4	63,01	052
6	0,10	13	5,8		20	22	58	6	4	60,83	060
6	0,50	13	5,8		20	22	58	6	4	60,83	061
6	1,00	13	5,8		20	22	58	6	4	60,83	062
8	0,15	19	7,7		25	28	64	8	4	81,12	080
8	0,50	19	7,7		25	28	64	8	4	81,12	081
8	1,00	19	7,7		25	28	64	8	4	81,12	082
8	2,00	19	7,7		25	28	64	8	4	81,12	083
10	0,15	22	9,5		30	33	73	10	4	105,90	100
10	0,50	22	9,5		30	33	73	10	4	105,90	101
10	1,00	22	9,5		30	33	73	10	4	105,90	102
10	1,50	22	9,5		30	33	73	10	4	105,90	103
10	2,00	22	9,5		30	33	73	10	4	105,90	104
12	0,20	26	11,5		35	39	84	12	4	168,00	120
12	0,50	26	11,5		35	39	84	12	4	168,00	121
12	1,00	26	11,5		35	39	84	12	4	168,00	122
12	1,50	26	11,5		35	39	84	12	4	168,00	123
12	2,00	26	11,5		35	39	84	12	4	168,00	124
14	1,00	26	13,5		35	39	84	14	4	215,80	140
16	0,30	32	15,5		40	45	93	16	4	265,30	160
16	0,50	32	15,5		40	45	93	16	4	265,30	161
16	1,00	32	15,5		40	45	93	16	4	265,30	162
16	2,00	32	15,5		40	45	93	16	4	265,30	163
16	4,00	32	15,5		40	45	93	16	4	265,30	164
20	0,30	38	19,5		50	54	104	20	4	409,90	200
20	0,50	38	19,5		50	54	104	20	4	409,90	201
20	1,00	38	19,5		50	54	104	20	4	409,90	202
20	2,00	38	19,5		50	54	104	20	4	409,90	203

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 322+323

14

MonsterMill – End milling cutter

The specialist for machining steel and cast iron

SCR | λ_s = 35° 38° γ_s = 7° | HPC



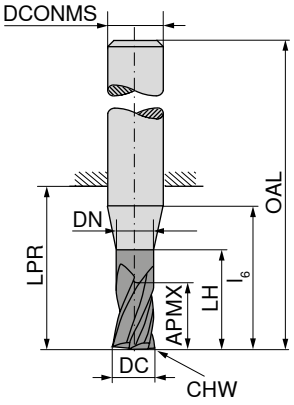

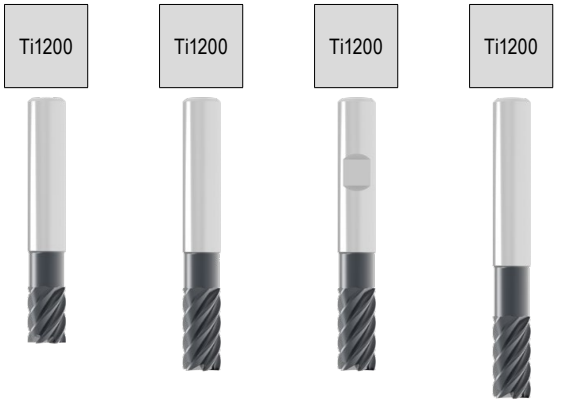

DIN 6527 | DIN 6527 | DIN 6527 | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	52 608 ... EUR V2		52 608 ... EUR V2		52 608 ... EUR V2		52 608 ... EUR V2	
5	9	4,8	16	18	18	54	6	0,12	6	73,02	050						
5	13	4,8	19	20	22	58	6	0,12	6			73,02	051				
5	13	4,8	24	25	26	62	6	0,12	6							82,71	052
6	10	5,8		16	18	54	6	0,12	6	70,55	060						
6	13	5,8		20	22	58	6	0,12	6			70,55	061				
6	13	5,8		25	26	62	6	0,12	6							80,39	062
8	12	7,7		20	23	59	8	0,12	6	93,86	080						
8	19	7,7		25	28	64	8	0,12	6			93,86	081				
8	19	7,7		30	32	68	8	0,12	6							106,20	082
10	15	9,5		24	27	67	10	0,20	6	122,70	100						
10	22	9,5		30	33	73	10	0,20	6			122,70	101	122,70	103		
10	22	9,5		35	40	80	10	0,20	6							137,40	102
12	18	11,5		26	28	73	12	0,20	6	194,30	120						
12	26	11,5		35	39	84	12	0,20	6			194,30	121	194,30	123		
12	26	11,5		45	48	93	12	0,20	6							215,80	122
16	24	15,5		32	35	83	16	0,20	6	308,60	160						
16	32	15,5		40	45	93	16	0,20	6			308,60	161	308,60	163		
16	32	15,5		55	60	108	16	0,20	6							356,40	162
20	30	19,5		40	43	93	20	0,30	6	475,20	200						
20	38	19,5		50	54	104	20	0,30	6			475,20	201	475,20	203		
20	38	19,5		70	76	126	20	0,30	6							567,90	202

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 322–325

MonsterMill – Ball Nosed Cutter

The specialist for machining steel and cast iron

▲ Radius accuracy: - 0,015 mm for Ø ≤ 6,0 mm / - 0,02 mm for Ø > 6,0 mm

SCR | λ_s=35° γ_s= 7° | HPC



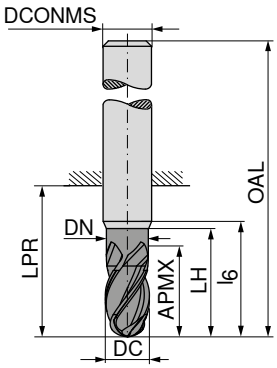

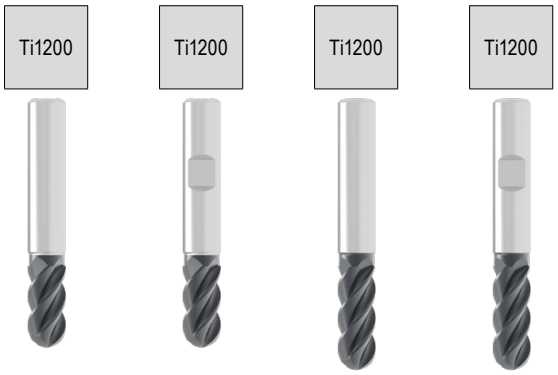

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

DC $_{f8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	52 611 ... EUR V2		52 611 ... EUR V2		52 612 ... EUR V2		52 612 ... EUR V2	
3	5	2,9	9	14	14	50	6	3	68,23	**030**						
3	8	2,9	14	20	22	58	6	3					70,98	**030**		
4	8	3,8	12	18	18	54	6	3	68,23	**040**						
4	11	3,8	18	20	22	58	6	3					70,98	**040**		
5	9	4,8	16	18	18	54	6	3	69,53	**050**						
5	13	4,8	19	20	22	58	6	3					72,14	**050**		
6	10	5,8		16	18	54	6	4	67,36	**060**	67,36	**061**				
6	13	5,8		20	22	58	6	4					69,98	**060**	69,98	**061**
8	12	7,7		20	23	59	8	4	89,52	**080**	89,52	**081**				
8	19	7,7		25	28	64	8	4					93,01	**080**	93,01	**081**
10	15	9,5		24	27	67	10	4	116,80	**100**	116,80	**101**				
10	22	9,5		30	33	73	10	4					121,20	**100**	121,20	**101**
12	18	11,5		26	28	73	12	4	184,00	**120**	184,00	**121**				
12	26	11,5		35	39	84	12	4					191,30	**120**	191,30	**121**
16	24	15,5		32	35	83	16	4	294,20	**160**	294,20	**161**				
16	32	15,5		40	45	93	16	4					304,30	**160**	304,30	**161**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 322+323

14

MonsterMill – Torus Face Milling Cutter

The specialist for machining steel and cast iron

▲ r_{3D} = programmed corner radius

▲ For HFC machining: APMX does not correspond to the maximum cutting depth

SCR | λ_s=45° γ_s= 7° | HFC | HPC | ≤ 60 HRC



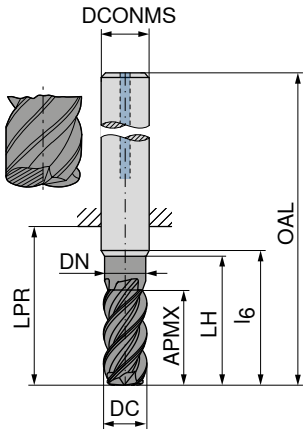





DIN 6527 | DIN 6527

DC $_{-0.04}$ mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	l_6 mm	DCONMS $_{h5}$ mm	T $_{max.}$ mm	ZEFP	52 609 ... EUR V2		52 609 ... EUR V2	
3	0,4	3	2,9	14,00	21	57	20	6	0,10	4	133,40	**030**	133,40	**031**
4	0,5	4	3,8	18,00	21	57	20	6	0,15	4	136,70	**040**	136,70	**041**
5	0,6	5	4,8	18,00	21	57	20	6	0,20	4	152,20	**050**	152,20	**051**
6	0,8	13	5,8	19,90	21	57	20	6	0,20	4	138,60	**060**	138,60	**061**
8	1,0	19	7,7	24,85	27	63	25	8	0,30	4	159,50	**080**	159,50	**081**
10	1,2	22	9,5	29,75	32	72	30	10	0,40	4	188,40	**100**	188,40	**101**
12	1,6	26	11,5	34,75	38	83	35	12	0,40	4	240,60	**120**	240,60	**121**
16	2,2	32	15,5	39,75	44	92	40	16	0,50	4	378,10	**160**	378,10	**161**
P												●		●
M														
K												●		●
N														
S														
H												○		○
O														

→ v_c/f_z Page 326–328

MonsterMill – End milling cutter

The specialist for machining stainless steel

ICR | λ_s=40° 38° γ_s=10° | HPC



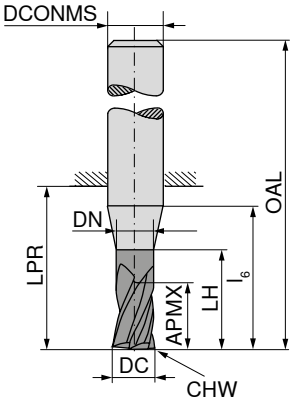

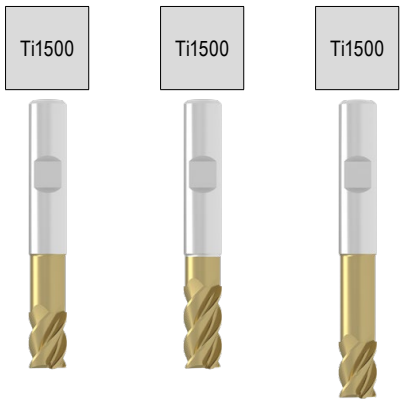



DIN 6527 | Factory standard | Factory standard

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	52 784 ... EUR V1		52 784 ... EUR V1		52 784 ... EUR V1	
1,5	2,3	1,4	6	14	21	57	6	0,04	3	74,60	**017**				
2,0	3,0	1,9	8	15	21	57	6	0,04	3	74,60	**022**				
2,5	3,8	2,4	10	16	21	57	6	0,07	3	74,60	**027**				
3,0	5,0	2,9	14	18	21	57	6	0,07	3	73,15	**032**				
3,0	8,0	2,9	14	18	21	57	6	0,07	3			78,37	**034**		
3,0	5,0	2,9	19	23	26	62	6	0,07	3					78,37	**036**
4,0	8,0	3,8	18	20	21	57	6	0,07	3	74,60	**042**				
4,0	11,0	3,8	18	20	21	57	6	0,07	3			79,67	**044**		
4,0	8,0	3,8	23	25	26	62	6	0,07	3					79,67	**046**
5,0	9,0	4,8	19	20	21	57	6	0,12	3	75,92	**052**				
5,0	13,0	4,8	19	20	21	57	6	0,12	3			80,97	**054**		
5,0	9,0	4,8	24	25	26	62	6	0,12	3					80,97	**056**
6,0	10,0	5,8	20		21	57	6	0,12	4	77,06	**062**				
6,0	13,0	5,8	20		21	57	6	0,12	4			82,13	**064**		
6,0	10,0	5,8	25		26	62	6	0,12	4					82,13	**066**
8,0	12,0	7,7	25		27	63	8	0,12	4	91,13	**082**				
8,0	19,0	7,7	25		27	63	8	0,12	4			96,03	**084**		
8,0	12,0	7,7	30		32	68	8	0,12	4					94,73	**086**
10,0	15,0	9,5	30		32	72	10	0,20	4	116,20	**102**				
10,0	22,0	9,5	30		32	72	10	0,20	4			123,70	**104**		
10,0	15,0	9,5	35		40	80	10	0,20	4					123,70	**106**
12,0	18,0	11,5	35		38	83	12	0,20	4	155,00	**122**				
12,0	26,0	11,5	35		38	83	12	0,20	4			163,70	**124**		
12,0	18,0	11,5	45		48	93	12	0,20	4					166,60	**126**
14,0	21,0	13,5	35		38	83	14	0,20	4	212,90	**142**				
14,0	26,0	13,5	35		38	83	14	0,20	4			224,70	**144**		
14,0	21,0	13,5	50		54	99	14	0,20	4					240,60	**146**
16,0	24,0	15,5	40		44	92	16	0,20	4	255,00	**161**				
16,0	24,0	15,5	40		44	92	16	0,20	5	265,30	**162** [1]				
16,0	32,0	15,5	40		44	92	16	0,20	4			267,90	**163**		
16,0	32,0	15,5	40		44	92	16	0,20	5			283,90	**164** [1]		
16,0	24,0	15,5	55		60	108	16	0,20	4					283,90	**165**
16,0	24,0	15,5	55		60	108	16	0,20	5					292,50	**166** [1]
18,0	27,0	17,5	40		44	92	18	0,20	4	328,80	**181**				
18,0	27,0	17,5	40		44	92	18	0,20	5	347,70	**182** [1]				
18,0	32,0	17,5	40		44	92	18	0,20	4			350,60	**183**		
18,0	32,0	17,5	40		44	92	18	0,20	5			366,40	**184** [1]		
18,0	27,0	17,5	60		66	114	18	0,20	4					378,10	**185**
18,0	27,0	17,5	60		66	114	18	0,20	5					396,90	**186** [1]
20,0	30,0	19,5	50		54	104	20	0,30	4	383,80	**201**				
20,0	30,0	19,5	50		54	104	20	0,30	5	402,70	**202** [1]				
20,0	38,0	19,5	50		54	104	20	0,30	4			405,60	**203**		
20,0	38,0	19,5	50		54	104	20	0,30	5			427,30	**204** [1]		
20,0	30,0	19,5	70		76	126	20	0,30	4					430,20	**205**
20,0	30,0	19,5	70		76	126	20	0,30	5					451,90	**206** [1]

P	○	○	○
M	●	●	●
K	○	○	○
N	○	○	○
S	●	●	●
H	○	○	○
O	○	○	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 330–335

MonsterMill – End milling cutter

The specialist for machining stainless steel

ICR | λ_s=40° γ_s=38° γ_s=10° | HPC | Ti1500



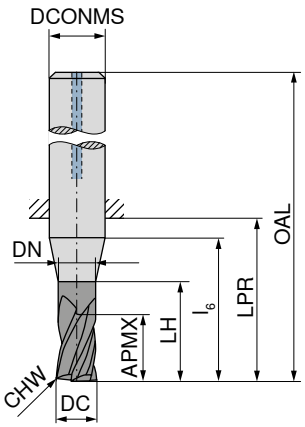

DIN 6527

52 786 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	EUR V1	
3	8	2,9	14	18	21	57	6	0,07	3	85,90	**034**
4	11	3,8	18	20	21	57	6	0,07	3	87,19	**044**
5	13	4,8	19	20	21	57	6	0,12	3	88,50	**054**
6	13	5,8	20		21	57	6	0,12	4	89,66	**064**
8	19	7,7	25		27	63	8	0,12	4	105,20	**084**
10	22	9,5	30		32	72	10	0,20	4	134,00	**104**
12	26	11,5	35		38	83	12	0,20	4	178,10	**124**
14	26	13,5	35		38	83	14	0,20	4	260,60	**144**
16	32	15,5	40		44	92	16	0,20	4	307,10	**163**
16	32	15,5	40		44	92	16	0,20	5	323,10	**164** [1]
18	32	17,5	40		44	92	18	0,20	4	405,60	**183**
18	32	17,5	40		44	92	18	0,20	5	427,30	**184** [1]
20	38	19,5	50		54	104	20	0,30	4	480,90	**203**
20	38	19,5	50		54	104	20	0,30	5	502,60	**204** [1]

P	○
M	●
K	○
N	○
S	●
H	○
O	○

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 331–333

MonsterMill – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

▲ PRFRAD3 = 1 mm

TCR | λ_s=40° γ_s=10° | HPC



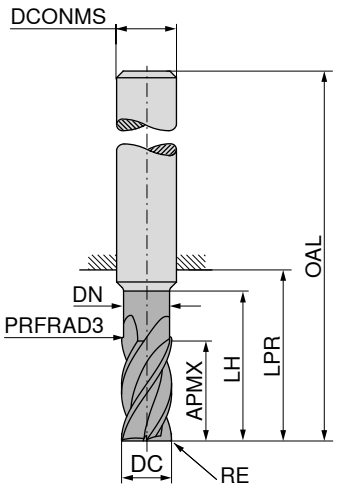

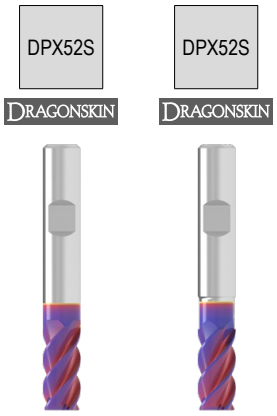



DC e8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 504 ... EUR V1		52 506 ... EUR V1	
4	0,1	11		14	21	57	6	4	76,31	**04000**		
4	0,1	11	3,8	17	21	57	6	5			82,31	**04000**[1)]
5	0,1	13		16	21	57	6	4	76,31	**05000**		
5	0,1	13	4,8	19	21	57	6	5			85,67	**05000**[1)]
6	0,1	13			21	57	6	4	76,31	**06000**		
6	0,1	13	5,8	19	21	57	6	5			85,67	**06000**[1)]
8	0,2	21			27	63	8	4	106,10	**08000**		
8	0,2	21	7,7	25	27	63	8	5			106,10	**08000**[1)]
10	0,2	22			32	72	10	4	129,20	**10000**		
10	0,2	22	9,7	30	32	72	10	5			150,00	**10000**[1)]
12	0,2	26			38	83	12	4	139,30	**12000**		
12	0,2	26	11,6	36	38	83	12	5			186,80	**12000**[1)]
16	0,3	36			44	92	16	4	232,70	**16000**		
16	0,3	36	15,5	42	44	92	16	5			255,10	**16000**[1)]
20	0,3	41			54	104	20	4	334,10	**20000**		
20	0,3	41	19,5	52	54	104	20	5			402,10	**20000**[1)]

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

1) Cutter not suitable for full slot milling, use for finishing and trochoidal milling when slotting only!

→ v_c/f_z Page 336+337

14

MonsterMill – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

▲ PRFRAD3 = 1 mm





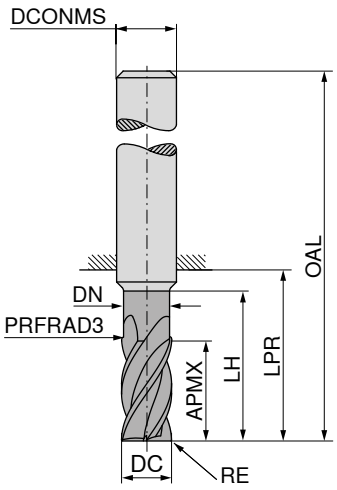

DC e8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 508 ... EUR V1		52 508 ... EUR V1	
4	0,4	8,5	3,8	20	26	62	6	4			79,65	04104
4	0,5	8,5	3,8	20	26	62	6	4			79,65	04105
4	0,8	8,5	3,8	20	26	62	6	4			79,65	04108
4	0,2	11,0		14	21	57	6	4	76,31	04002		
4	0,4	11,0		14	21	57	6	4	76,31	04004		
4	0,5	11,0		14	21	57	6	4	76,31	04005		
5	0,5	10,5	4,8	25	34	70	6	4			88,36	05105
5	0,8	10,5	4,8	25	34	70	6	4			88,36	05108
5	0,5	13,0		16	21	57	6	4	79,65	05005		
5	1,0	13,0		16	21	57	6	4	79,65	05010		
6	0,4	13,0			21	57	6	4	79,65	06004		
6	0,5	13,0			21	57	6	4	79,65	06005		
6	0,6	13,0			21	57	6	4	79,65	06006		
6	0,6	13,0	5,8	30	34	70	6	4			93,05	06106
6	0,8	13,0			21	57	6	4	79,65	06008		
6	0,8	13,0	5,8	30	34	70	6	4			93,05	06108
6	1,0	13,0			21	57	6	4	83,33	06010		
6	1,0	13,0	5,8	30	34	70	6	4			93,05	06110
6	1,5	13,0			21	57	6	4	83,33	06015		
8	0,8	17,0	7,7	40	44	80	8	4			129,80	08108
8	1,0	17,0	7,7	40	44	80	8	4			129,80	08110
8	1,5	17,0	7,7	40	44	80	8	4			129,80	08115
8	2,0	17,0	7,7	40	44	80	8	4			129,80	08120
8	0,5	21,0			27	63	8	4	106,10	08005		
8	0,8	21,0			27	63	8	4	106,10	08008		
8	1,0	21,0			27	63	8	4	110,10	08010		
8	1,2	21,0			27	63	8	4	110,10	08012		
8	1,5	21,0			27	63	8	4	110,10	08015		
8	2,0	21,0			27	63	8	4	110,10	08020		
10	0,5	21,0	9,7	50	54	94	10	4			160,00	10105
10	1,0	21,0	9,7	50	54	94	10	4			160,00	10110
10	1,5	21,0	9,7	50	54	94	10	4			160,00	10115
10	2,0	21,0	9,7	50	54	94	10	4			160,00	10120
10	0,5	22,0			32	72	10	4	129,20	10005		
10	1,0	22,0			32	72	10	4	132,90	10010		
10	1,2	22,0			32	72	10	4	132,90	10012		
10	1,5	22,0			32	72	10	4	132,90	10015		
10	1,6	22,0			32	72	10	4	132,90	10016		
10	2,0	22,0			32	72	10	4	132,90	10020		
12	0,5	25,0	11,6	60	65	110	12	4			198,80	12105
12	1,0	25,0	11,6	60	65	110	12	4			198,80	12110

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 336+337

Continued on next page

MonsterMill – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

▲ PRFRAD3 = 1 mm

TCR | λ_s=40° γ_s=10° | HPC



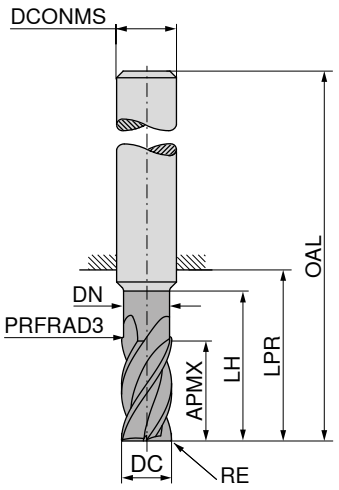

DPX52S DRAGONSKIN

DPX52S DRAGONSKIN

Factory standard

Factory standard

DC $_{e8}$ mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	52 508 ... EUR V1		52 508 ... EUR V1	
12	1,5	25,0	11,6	60	65	110	12	4			198,80	12115
12	2,0	25,0	11,6	60	65	110	12	4			198,80	12120
12	3,0	25,0	11,6	60	65	110	12	4			203,00	12130
12	4,0	25,0	11,6	60	65	110	12	4			203,00	12140
12	0,5	26,0			38	83	12	4	139,30	12005		
12	1,0	26,0			38	83	12	4	143,30	12010		
12	1,2	26,0			38	83	12	4	143,30	12012		
12	1,5	26,0			38	83	12	4	143,30	12015		
12	1,6	26,0			38	83	12	4	143,30	12016		
12	2,0	26,0			38	83	12	4	143,30	12020		
12	2,5	26,0			38	83	12	4	143,30	12025		
12	3,0	26,0			38	83	12	4	143,30	12030		
14	1,0	29,0	13,6	70	75	120	14	4			272,80	14110
14	2,0	29,0	13,6	70	75	120	14	4			272,80	14120
14	3,0	29,0	13,6	70	75	120	14	4			277,00	14130
14	4,0	29,0	13,6	70	75	120	14	4			277,00	14140
16	1,0	33,0	15,5	80	84	132	16	4			323,10	16110
16	2,0	33,0	15,5	80	84	132	16	4			323,10	16120
16	3,0	33,0	15,5	80	84	132	16	4			327,00	16130
16	4,0	33,0	15,5	80	84	132	16	4			327,00	16140
16	1,0	36,0			44	92	16	4	242,00	16010		
16	1,6	36,0			44	92	16	4	242,00	16016		
16	2,0	36,0			44	92	16	4	242,00	16020		
16	2,5	36,0			44	92	16	4	242,00	16025		
16	3,0	36,0			44	92	16	4	242,00	16030		
16	3,2	36,0			44	92	16	4	247,20	16032		
16	4,0	36,0			44	92	16	4	247,20	16040		
18	1,0	38,0	17,5	90	94	142	18	4			419,40	18110
18	2,0	38,0	17,5	90	94	142	18	4			419,40	18120
18	3,0	38,0	17,5	90	94	142	18	4			423,70	18130
18	4,0	38,0	17,5	90	94	142	18	4			423,70	18140
20	2,0	41,0			54	104	20	4	334,10	20020		
20	3,0	41,0			54	104	20	4	334,10	20030		
20	4,0	41,0			54	104	20	4	339,60	20040		
20	5,0	41,0			54	104	20	4	339,60	20050		
20	6,3	41,0			54	104	20	4	344,10	20063		
20	1,0	42,0	19,5	100	104	154	20	4			455,80	20110
20	2,0	42,0	19,5	100	104	154	20	4			455,80	20120
20	3,0	42,0	19,5	100	104	154	20	4			459,90	20130
20	4,0	42,0	19,5	100	104	154	20	4			459,90	20140

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 336+337

14

MonsterMill – Ball Nosed Cutter

The specialist for machining titanium and titanium alloys

TCR | λ_s=40° γ_s=10°

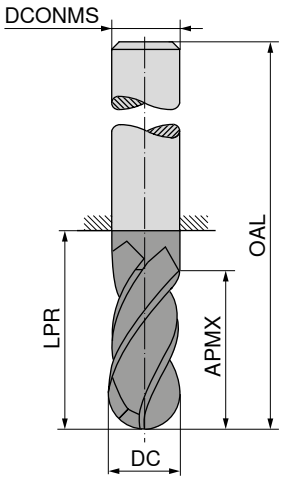

DPX52S DRAGONSKIN

DPX52S DRAGONSKIN

Factory standard

Factory standard

DC $_{e8}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	ZEFP	52 514 ... EUR V1		52 514 ... EUR V1	
2	4	18	54	6	4	70,61	**02000**		
2	4	44	80	6	4			99,76	**02100**
3	5	18	54	6	4	70,61	**03000**		
3	5	44	80	6	4			99,76	**03100**
4	8	18	54	6	4	70,61	**04000**		
4	8	44	80	6	4			99,76	**04100**
5	9	18	54	6	4	78,67	**05000**		
5	9	44	80	6	4			104,40	**05100**
6	10	18	54	6	4	78,67	**06000**		
6	10	44	80	6	4			104,40	**06100**
8	12	22	58	8	4	89,38	**08000**		
8	12	64	100	8	4			111,80	**08100**
10	14	26	66	10	4	118,10	**10000**		
10	14	60	100	10	4			143,30	**10100**
12	16	28	73	12	4	154,60	**12000**		
12	16	55	100	12	4			179,40	**12100**
16	20	34	82	16	4	232,00	**16000**		
16	20	52	100	16	4			256,70	**16100**
P						○		○	
M						○		○	
K									
N									
S						●		●	
H									
O									

→ v_c/f_z Page 338+339

MonsterMill – Torus Face Milling Cutter

The specialist for machining titanium and titanium alloys

▲ r_{3D} = programmed corner radius
▲ APMX does not correspond to the maximum cutting depth

TCR | λ_s=15° γ_s=10° | HFC | HPC

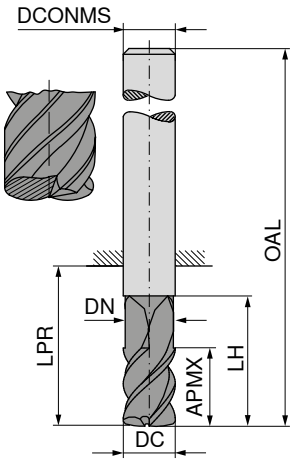

DIN 6527

DIN 6527

DC e8 mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 512 ... EUR V1		52 512 ... EUR V1	
2	0,3	1,5	1,7	13	18	54	6	2	77,30	**02000**		
2	0,3	1,5	1,7	18	39	75	6	2			82,01	**02100**
3	0,3	1,5	2,7	15	18	54	6	2	77,30	**03000**		
3	0,3	1,5	2,7	20	39	75	6	2			82,01	**03100**
4	0,5	2,5	3,6	16	22	58	6	2	77,30	**04000**		
4	0,5	2,5	3,6	24	49	85	6	2			85,67	**04100**
5	0,5	3,5	4,6	18	29	65	6	4	83,00	**05000**		
5	0,5	3,5	4,6	28	64	100	6	4			96,03	**05100**
6	1,0	3,5	5,2	20	29	65	6	4	83,00	**06000**		
6	1,0	3,5	5,2	28	64	100	6	4			96,03	**06100**
8	1,5	4,8	7,0	24	34	70	8	5	99,40	**08000**		
8	1,5	4,8	7,0	40	64	100	8	5			125,80	**08100**
10	2,0	5,8	9,0	26	45	85	10	5	133,30	**10000**		
10	2,0	5,8	9,0	48	60	100	10	5			175,70	**10100**
12	2,0	6,8	11,0	30	48	93	12	5	177,70	**12000**		
12	2,0	6,8	11,0	56	75	120	12	5			224,90	**12100**
16	2,5	8,8	14,5	35	52	100	16	5	213,20	**16000**		
16	2,5	8,8	14,5	65	102	150	16	5			273,80	**16100**

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 338

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm





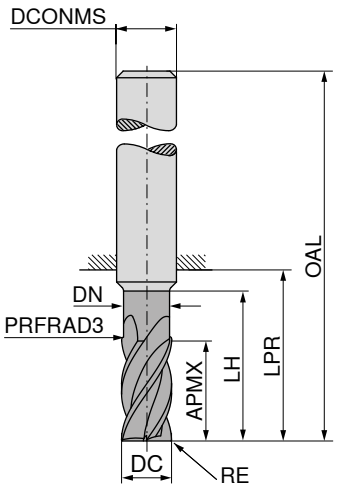

DPA52S

DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V1	
4	0,1	11	3,8	17	21	57	6	4	54,84	**04201**
4	0,2	11	3,8	17	21	57	6	4	56,07	**04202**
4	0,4	11	3,8	17	21	57	6	4	56,98	**04204**
4	0,5	11	3,8	17	21	57	6	4	56,98	**04205**
5	0,1	13	4,8	19	21	57	6	4	58,19	**05201**
5	0,5	13	4,8	19	21	57	6	4	57,68	**05205**
5	1,0	13	4,8	19	21	57	6	4	57,68	**05210**
6	0,1	13	5,8	19	21	57	6	4	56,51	**06201**
6	0,4	13	5,8	19	21	57	6	4	58,89	**06204**
6	0,5	13	5,8	19	21	57	6	4	56,07	**06205**
6	0,6	13	5,8	19	21	57	6	4	56,30	**06206**
6	0,8	13	5,8	19	21	57	6	4	56,73	**06208**
6	1,0	13	5,8	19	21	57	6	4	56,07	**06210**
6	1,5	13	5,8	19	21	57	6	4	56,30	**06215**
8	0,2	19	7,7	25	27	63	8	4	72,73	**08202**
8	0,5	21	7,7	25	27	63	8	4	72,04	**08205**
8	0,8	21	7,7	25	27	63	8	4	72,73	**08208**
8	1,0	21	7,7	25	27	63	8	4	71,78	**08210**
8	1,2	21	7,7	25	27	63	8	4	72,04	**08212**
8	1,5	21	7,7	25	27	63	8	4	72,28	**08215**
8	2,0	21	7,7	25	27	63	8	4	71,78	**08220**
10	0,2	22	9,7	30	32	72	10	4	94,14	**10202**
10	0,5	22	9,7	30	32	72	10	4	93,43	**10205**
10	1,0	22	9,7	30	32	72	10	4	93,24	**10210**
10	1,2	22	9,7	30	32	72	10	4	93,72	**10212**
10	1,5	22	9,7	30	32	72	10	4	93,24	**10215**
10	1,6	22	9,7	30	32	72	10	4	93,24	**10216**
10	2,0	22	9,7	30	32	72	10	4	93,43	**10220**
12	0,2	26	11,6	36	38	83	12	4	145,50	**12202**
12	0,5	26	11,6	36	38	83	12	4	145,20	**12205**
12	1,0	26	11,6	36	38	83	12	4	144,90	**12210**
12	1,2	26	11,6	36	38	83	12	4	145,60	**12212**
12	1,5	26	11,6	36	38	83	12	4	144,90	**12215**
12	1,6	26	11,6	36	38	83	12	4	144,90	**12216**
12	2,0	26	11,6	36	38	83	12	4	144,90	**12220**
12	2,5	26	11,6	36	38	83	12	4	145,50	**12225**
12	3,0	26	11,6	36	38	83	12	4	145,60	**12230**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 340+341

Continued on next page

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm

NCR | λ_s=35° γ_s= 7° | HPC



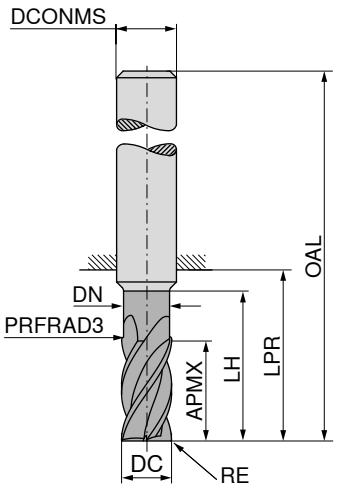

DPA52S

DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V1	
16	0,3	36	15,5	42	44	92	16	4	226,30	**16203**
16	1,0	36	15,5	42	44	92	16	4	225,90	**16210**
16	1,6	36	15,5	42	44	92	16	4	228,10	**16216**
16	2,0	36	15,5	42	44	92	16	4	225,70	**16220**
16	2,5	36	15,5	42	44	92	16	4	226,30	**16225**
16	3,0	36	15,5	42	44	92	16	4	227,10	**16230**
16	3,2	36	15,5	42	44	92	16	4	227,10	**16232**
16	4,0	36	15,5	42	44	92	16	4	225,70	**16240**
20	0,3	41	19,5	52	54	104	20	4	356,40	**20203**
20	1,0	41	19,5	52	54	104	20	4	355,50	**20210**
20	2,0	41	19,5	52	54	104	20	4	355,50	**20220**
20	3,0	41	19,5	52	54	104	20	4	357,20	**20230**
20	4,0	41	19,5	52	54	104	20	4	358,90	**20240**
20	5,0	41	19,5	52	54	104	20	4	359,40	**20250**
20	6,3	41	19,5	52	54	104	20	4	360,00	**20263**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 340+341

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm





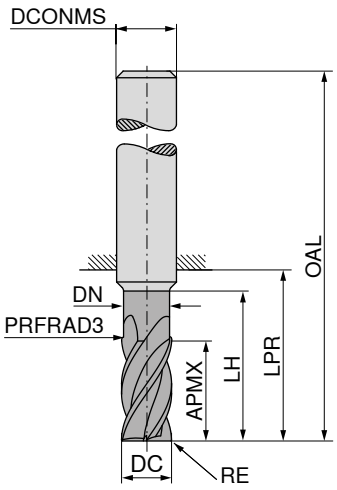



Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V1	
4	0,1	8,5	3,8	20	26	62	6	4	53,91	**04401**
4	0,2	8,5	3,8	20	26	62	6	4	55,14	**04402**
4	0,4	8,5	3,8	20	26	62	6	4	56,07	**04404**
4	0,5	8,5	3,8	20	26	62	6	4	56,07	**04405**
5	0,1	10,5	4,8	25	34	70	6	4	58,60	**05401**
5	0,5	10,5	4,8	25	34	70	6	4	58,19	**05405**
5	1,0	10,5	4,8	25	34	70	6	4	58,19	**05410**
6	0,1	13,0	5,8	30	34	70	6	4	57,68	**06401**
6	0,4	13,0	5,8	30	34	70	6	4	60,03	**06404**
6	0,5	13,0	5,8	30	34	70	6	4	57,25	**06405**
6	0,6	13,0	5,8	30	34	70	6	4	57,49	**06406**
6	0,8	13,0	5,8	30	34	70	6	4	57,92	**06408**
6	1,0	13,0	5,8	30	34	70	6	4	56,98	**06410**
6	1,5	13,0	5,8	30	34	70	6	4	57,49	**06415**
8	0,2	17,0	7,7	40	44	80	8	4	75,54	**08402**
8	0,5	17,0	7,7	40	44	80	8	4	74,61	**08405**
8	0,8	17,0	7,7	40	44	80	8	4	75,37	**08408**
8	1,0	17,0	7,7	40	44	80	8	4	74,45	**08410**
8	1,2	17,0	7,7	40	44	80	8	4	74,61	**08412**
8	1,5	17,0	7,7	40	44	80	8	4	74,84	**08415**
8	2,0	17,0	7,7	40	44	80	8	4	74,45	**08420**
10	0,2	21,0	9,7	50	54	94	10	4	97,92	**10402**
10	0,5	21,0	9,7	50	54	94	10	4	100,00	**10405**
10	1,0	21,0	9,7	50	54	94	10	4	99,55	**10410**
10	1,2	21,0	9,7	50	54	94	10	4	100,00	**10412**
10	1,5	21,0	9,7	50	54	94	10	4	99,32	**10415**
10	1,6	21,0	9,7	50	54	94	10	4	99,32	**10416**
10	2,0	21,0	9,7	50	54	94	10	4	99,32	**10420**
12	0,2	25,0	11,6	60	65	110	12	4	160,70	**12402**
12	0,5	25,0	11,6	60	65	110	12	4	160,10	**12405**
12	1,0	25,0	11,6	60	65	110	12	4	159,60	**12410**
12	1,2	25,0	11,6	60	65	110	12	4	160,10	**12412**
12	1,5	25,0	11,6	60	65	110	12	4	159,40	**12415**
12	1,6	25,0	11,6	60	65	110	12	4	159,60	**12416**
12	2,0	25,0	11,6	60	65	110	12	4	159,10	**12420**
12	2,5	25,0	11,6	60	65	110	12	4	159,60	**12425**
12	3,0	25,0	11,6	60	65	110	12	4	159,90	**12430**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 342+343

Continued on next page

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm

NCR | λ_s=35° γ_s= 7° | HPC



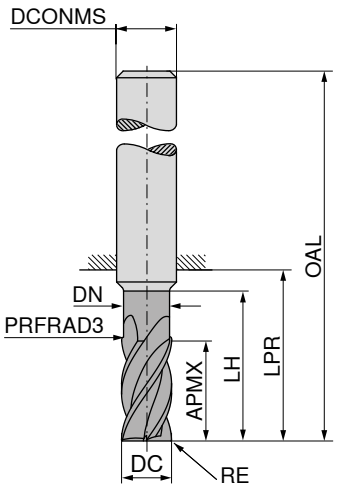

DPA52S

DRAGONSKIN

Factory standard

53 030 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V1	
16	0,3	33,0	15,5	80	84	132	16	4	265,40	**16403**
16	1,0	33,0	15,5	80	84	132	16	4	264,10	**16410**
16	1,6	33,0	15,5	80	84	132	16	4	265,90	**16416**
16	2,0	33,0	15,5	80	84	132	16	4	263,10	**16420**
16	2,5	33,0	15,5	80	84	132	16	4	263,70	**16425**
16	3,0	33,0	15,5	80	84	132	16	4	264,20	**16430**
16	3,2	33,0	15,5	80	84	132	16	4	264,50	**16432**
16	4,0	33,0	15,5	80	84	132	16	4	262,40	**16440**
20	0,3	42,0	19,5	100	104	154	20	4	438,20	**20403**
20	1,0	42,0	19,5	100	104	154	20	4	435,60	**20410**
20	2,0	42,0	19,5	100	104	154	20	4	434,40	**20420**
20	3,0	42,0	19,5	100	104	154	20	4	436,40	**20430**
20	4,0	42,0	19,5	100	104	154	20	4	437,70	**20440**
20	5,0	42,0	19,5	100	104	154	20	4	438,50	**20450**
20	6,3	42,0	19,5	100	104	154	20	4	439,10	**20463**

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 342+343

14

MonsterMill – End milling cutter with corner radius

The specialist for machining nickel-based alloys

▲ PRFRAD3 = 1 mm

NCR | λ_s=35° γ_s= 7° | HPC



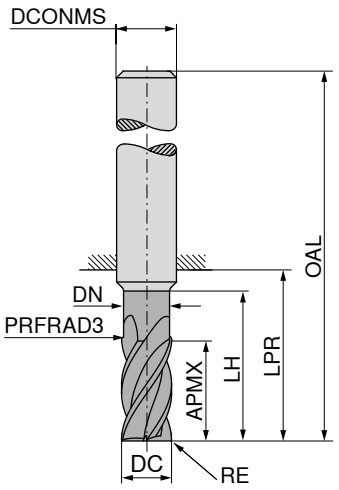

DPA52S

DRAGONSKIN

Factory standard

53 031 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V1	
6	0,1	13	5,8	19	21	57	6	5	60,31	06201
6	0,4	13	5,8	19	21	57	6	5	63,11	06204
6	0,5	13	5,8	19	21	57	6	5	60,03	06205
6	0,6	13	5,8	19	21	57	6	5	60,48	06206
6	0,8	13	5,8	19	21	57	6	5	60,96	06208
6	1,0	13	5,8	19	21	57	6	5	60,03	06210
6	1,5	13	5,8	19	21	57	6	5	60,48	06215
8	0,2	19	7,7	25	27	63	8	5	76,98	08202
8	0,5	21	7,7	25	27	63	8	5	76,53	08205
8	0,8	21	7,7	25	27	63	8	5	77,49	08208
8	1,0	21	7,7	25	27	63	8	5	76,53	08210
8	1,2	21	7,7	25	27	63	8	5	76,74	08212
8	1,5	21	7,7	25	27	63	8	5	76,98	08215
8	2,0	21	7,7	25	27	63	8	5	76,53	08220
10	0,2	22	9,7	30	32	72	10	5	100,80	10202
10	0,5	22	9,7	30	32	72	10	5	100,00	10205
10	1,0	22	9,7	30	32	72	10	5	100,00	10210
10	1,2	22	9,7	30	32	72	10	5	100,50	10212
10	1,5	22	9,7	30	32	72	10	5	100,00	10215
10	1,6	22	9,7	30	32	72	10	5	100,30	10216
10	2,0	22	9,7	30	27	72	10	5	100,50	10220
12	0,2	26	11,6	36	38	83	12	5	154,20	12202
12	0,5	26	11,6	36	38	83	12	5	154,50	12205
12	1,0	26	11,6	36	38	83	12	5	154,50	12210
12	1,2	26	11,6	36	38	83	12	5	155,10	12212
12	1,5	26	11,6	36	38	83	12	5	154,70	12215
12	1,6	26	11,6	36	38	83	12	5	154,80	12216
12	2,0	26	11,6	36	38	83	12	5	154,70	12220
12	2,5	26	11,6	36	38	83	12	5	155,10	12225
12	3,0	26	11,6	36	38	83	12	5	155,60	12230
16	0,3	36	15,5	42	44	92	16	5	238,60	16203
16	1,0	36	15,5	42	44	92	16	5	239,20	16210
16	1,6	36	15,5	42	44	92	16	5	241,70	16216
16	2,0	36	15,5	42	44	92	16	5	239,20	16220
16	2,5	36	15,5	42	44	92	16	5	240,20	16225
16	3,0	36	15,5	42	44	92	16	5	241,00	16230
16	3,2	36	15,5	42	44	92	16	5	241,20	16232
16	4,0	36	15,5	42	44	92	16	5	239,60	16240
20	0,3	41	19,5	52	54	104	20	5	373,90	20203
20	2,0	41	19,5	52	54	104	20	5	374,90	20220
20	3,0	41	19,5	52	54	104	20	5	376,90	20230
20	4,0	41	19,5	52	54	104	20	5	378,80	20240
20	5,0	41	19,5	52	54	104	20	5	380,00	20250
20	6,3	41	19,5	52	54	104	20	5	380,50	20263

P	
M	○
K	
N	
S	●
H	
O	

→ v_c/f_z Page 340

MonsterMill – Ball Nosed Cutter

The specialist for machining nickel-based alloys

NCR

λ_s = 35°
γ_s = 38°
γ_s = 7°

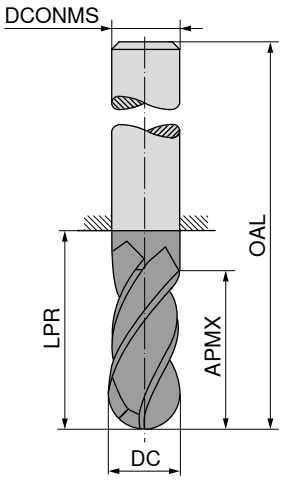

NEW
DPA52S
DRAGONSKIN

Factory standard

NEW
DPA52S
DRAGONSKIN

Factory standard

DC ±0,01 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	53 032 ... EUR V1		53 033 ... EUR V1	
2	4	18	54	6	4	62,72	**02210**		
2	4	44	80	6	4			65,12	**02410**
3	5	18	54	6	4	58,58	**03215**		
3	5	44	80	6	4			60,71	**03415**
4	8	18	54	6	4	58,58	**04220**		
4	8	44	80	6	4			60,71	**04420**
5	9	18	54	6	4	59,78	**05225**		
5	9	44	80	6	4			61,91	**05425**
6	10	18	54	6	4	57,77	**06230**		
6	10	44	80	6	4			60,04	**06430**
8	12	22	58	8	4	76,59	**08240**		
8	12	64	100	8	4			79,53	**08440**
10	14	26	66	10	4	99,80	**10250**		
10	14	60	100	10	4			103,50	**10450**
12	16	28	73	12	4	157,20	**12260**		
12	16	55	100	12	4			163,40	**12460**
16	20	34	82	16	4	248,10	**16280**		
16	20	52	100	16	4			257,60	**16480**
P									
M						○		○	
K									
N									
S						●		●	
H									
O									

→ v_c/f_z Page 342+343

MonsterMill – Finish milling cutter with corner radius

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

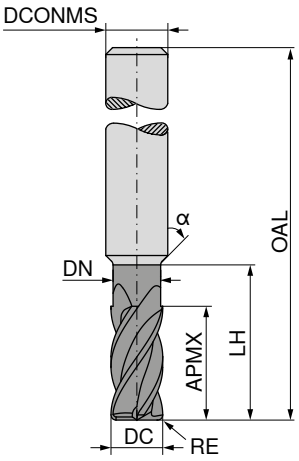

DPX62U DRAGONSKIN

DPX62U DRAGONSKIN





DC	RE	APMX	DN	LH	α°	OAL	DCONMS $_{h5}$	T_x	ZEFP	53 603 ... EUR V1		53 604 ... EUR V1	
mm	mm	mm	mm	mm		mm	mm						
0,2	0,05	0,5		0,5	30	48	4	2,5 x DC	2				
0,2	0,05	0,5	0,18	1,0	30	48	4	5 x DC	2	67,37	**30205**		
0,3	0,05	0,6	0,27	1,0	30	48	4	3,3 x DC	2	67,37	**40205**		
0,3	0,05	0,6	0,27	2,0	30	48	4	6,7 x DC	2	63,86	**30305**		
0,4	0,05	0,7	0,35	1,0	30	48	4	2,5 x DC	2	63,86	**40305**		
0,4	0,05	0,7	0,35	2,0	30	48	4	5 x DC	2	63,86	**30405**		
0,4	0,05	0,7	0,35	3,0	30	48	4	7,5 x DC	2	63,86	**40405**		
0,5	0,05	0,7	0,45	1,0	30	48	4	2 x DC	2	63,86	**50405**		
0,5	0,05	0,7	0,45	2,0	30	48	4	4 x DC	2	62,02	**30505**		
0,5	0,05	0,7	0,45	2,5	30	48	4	5 x DC	2	62,02	**40505**		
0,5	0,05	0,7	0,45	3,0	30	48	4	6 x DC	2	62,02	**50505**		
0,5	0,05	0,7	0,45	4,0	30	48	4	8 x DC	2	62,02	**60505**		
0,6	0,05	0,8	0,55	2,0	30	48	4	3,3 x DC	2	62,02	**70505**		
0,6	0,05	0,8	0,55	3,0	30	48	4	5 x DC	2	60,36	**30605**		
0,6	0,05	0,8	0,55	4,5	30	48	4	7,5 x DC	2	60,36	**40605**		
0,6	0,05	0,8	0,55	6,0	30	48	4	10 x DC	2	60,36	**50605**		
0,8	0,05	1,0	0,75	2,0	30	48	4	2,5 x DC	2			60,36	**30605**
0,8	0,05	1,0	0,75	4,0	30	48	4	5 x DC	2	60,36	**30805**		
0,8	0,05	1,0	0,75	6,0	30	48	4	7,5 x DC	2	60,36	**40805**		
0,8	0,05	1,0	0,75	8,0	30	48	4	10 x DC	2	60,36	**50805**		
0,8	0,05	1,0	0,75	10,0	30	48	4	12,5 x DC	2			62,24	**30805**
1,0	0,10	1,5	0,95	2,0	30	48	4	2 x DC	4			62,24	**40805**
1,0	0,10	1,5	0,95	4,0	30	48	4	4 x DC	4	68,32	**31001**		
1,0	0,10	1,5	0,95	6,0	30	48	4	6 x DC	4	69,76	**41001**		
1,0	0,10	1,5	0,95	8,0	30	48	4	8 x DC	4	69,76	**51001**		
1,0	0,10	1,5	0,95	10,0	30	48	4	10 x DC	4	71,53	**61001**		
1,0	0,10	1,5	0,95	14,0	30	48	4	14 x DC	4			71,53	**31001**
1,5	0,10	2,0	1,45	4,0	30	48	4	2,7 x DC	4	69,39	**31501**	71,53	**41001**
1,5	0,10	2,0	1,45	6,0	30	48	4	4 x DC	4	70,97	**41501**		
1,5	0,10	2,0	1,45	10,0	30	48	4	6,7 x DC	4	70,97	**51501**		
1,5	0,10	2,0	1,45	12,0	30	48	4	8 x DC	4	72,53	**61501**		
1,5	0,10	2,0	1,45	15,0	30	60	4	10 x DC	4			73,41	**31501**
1,5	0,10	2,0	1,45	20,0	30	60	4	13,3 x DC	4			75,20	**41501**
2,0	0,20	2,5	1,90	4,0	30	48	4	2 x DC	4	69,39	**32002**		
2,0	0,20	2,5	1,90	6,0	30	48	4	3 x DC	4	70,97	**42002**		
2,0	0,20	2,5	1,90	8,0	30	48	4	4 x DC	4	70,97	**52002**		
2,0	0,20	2,5	1,90	10,0	30	48	4	5 x DC	4	70,97	**62002**		
2,0	0,20	2,5	1,90	12,0	30	48	4	6 x DC	4	72,53	**72002**		
2,0	0,20	2,5	1,90	16,0	30	60	4	8 x DC	4	73,41	**82002**		
2,0	0,20	2,5	1,90	20,0	30	60	4	10 x DC	4			75,20	**32002**
2,0	0,20	2,5	1,90	25,0	30	60	4	12,5 x DC	4			75,20	**42002**
3,0	0,20	3,5	2,90	8,0	30	60	6	2,7 x DC	4	79,29	**33002**		

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 344–349

Continued on next page

MonsterMill – Finish milling cutter with corner radius

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

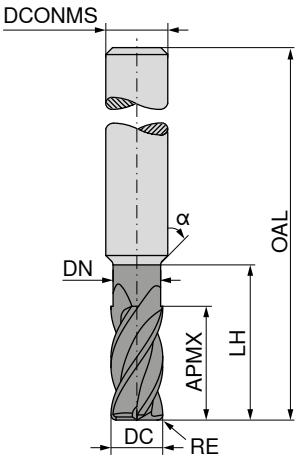

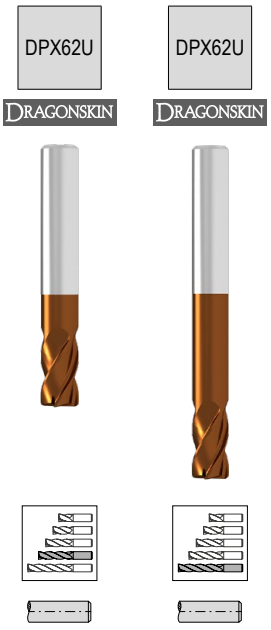

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 603 ... EUR V1		53 604 ... EUR V1
3,0	0,20	3,5	2,90	12,0	30	60	6	4 x DC	4	81,02	**43002**	
3,0	0,20	3,5	2,90	16,0	30	60	6	5,3 x DC	4	81,02	**53002**	
3,0	0,20	3,5	2,90	20,0	30	70	6	6,7 x DC	4	82,49	**63002**	
3,0	0,20	3,5	2,90	24,0	30	70	6	8 x DC	4	84,40	**73002**	
4,0	0,20	4,5	3,90	8,0	30	60	6	2 x DC	4	82,64	**34002**	
4,0	0,20	4,5	3,90	12,0	30	60	6	3 x DC	4	84,50	**44002**	
4,0	0,20	4,5	3,90	16,0	30	60	6	4 x DC	4	84,50	**54002**	
4,0	0,20	4,5	3,90	20,0	30	70	6	5 x DC	4	86,00	**64002**	
4,0	0,20	4,5	3,90	24,0	30	70	6	6 x DC	4	87,87	**74002**	
4,0	0,20	4,5	3,90	28,0	30	70	6	7 x DC	4	87,87	**84002**	
4,0	0,50	4,5	3,90	8,0	30	60	6	2 x DC	4	82,64	**34005**	
4,0	0,50	4,5	3,90	12,0	30	60	6	3 x DC	4	84,50	**44005**	
4,0	0,50	4,5	3,90	16,0	30	60	6	4 x DC	4	84,50	**54005**	
4,0	0,50	4,5	3,90	20,0	30	70	6	5 x DC	4	86,00	**64005**	
4,0	0,50	4,5	3,90	24,0	30	70	6	6 x DC	4	87,87	**74005**	
4,0	0,50	4,5	3,90	28,0	30	70	6	7 x DC	4	87,87	**84005**	
4,0	1,00	4,5	3,90	8,0	30	60	6	2 x DC	4	82,64	**34010**	
4,0	1,00	4,5	3,90	12,0	30	60	6	3 x DC	4	84,50	**44010**	
4,0	1,00	4,5	3,90	16,0	30	60	6	4 x DC	4	84,50	**54010**	
4,0	1,00	4,5	3,90	20,0	30	70	6	5 x DC	4	86,00	**64010**	
4,0	1,00	4,5	3,90	24,0	30	70	6	6 x DC	4	87,87	**74010**	
4,0	1,00	4,5	3,90	28,0	30	70	6	7 x DC	4	87,87	**84010**	
6,0	0,20	6,5	5,90	12,0		60	6	2 x DC	4	87,21	**36002**	
6,0	0,20	6,5	5,90	16,0		60	6	2,7 x DC	4	90,01	**46002**	
6,0	0,20	6,5	5,90	20,0		60	6	3,3 x DC	4	90,01	**56002**	
6,0	0,50	6,5	5,90	12,0		60	6	2 x DC	4	87,21	**36005**	
6,0	0,50	6,5	5,90	16,0		60	6	2,7 x DC	4	90,01	**46005**	
6,0	0,50	6,5	5,90	20,0		60	6	3,3 x DC	4	90,01	**56005**	
6,0	1,00	6,5	5,90	12,0		60	6	2 x DC	4	87,21	**36010**	
6,0	1,00	6,5	5,90	16,0		60	6	2,7 x DC	4	90,01	**46010**	
6,0	1,00	6,5	5,90	20,0		60	6	3,3 x DC	4	90,01	**56010**	
8,0	0,50	8,5	7,90	16,0		60	8	2 x DC	4	110,40	**38005**	
8,0	0,50	8,5	7,90	40,0		80	8	5 x DC	4	117,20	**48005**	
8,0	1,00	8,5	7,90	16,0		60	8	2 x DC	4	110,40	**38010**	
8,0	1,00	8,5	7,90	40,0		80	8	5 x DC	4	117,20	**48010**	
10,0	0,50	10,5	9,90	20,0		70	10	2 x DC	4	138,40	**10005**	
10,0	0,50	10,5	9,90	40,0		90	10	4 x DC	4	147,70	**10105**	
10,0	1,00	10,5	9,90	20,0		70	10	2 x DC	4	138,40	**10010**	
10,0	1,00	10,5	9,90	40,0		90	10	4 x DC	4	147,70	**10110**	
12,0	1,00	12,5	11,90	24,0		70	12	2 x DC	4	179,00	**12010**	
12,0	1,00	12,5	11,90	40,0		90	12	3,3 x DC	4	191,80	**12110**	

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 344–349

14

MonsterMill – Finish milling cutter with corner radius

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/-0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s = 50° γ_s = –15° | 54–70 HRC

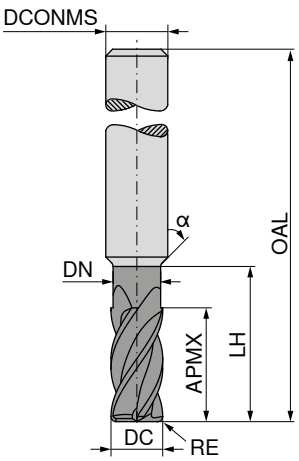



Factory standard | Factory standard

DC mm	RE mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 605 ... EUR V1		53 606 ... EUR V1	
1	0,03	2			30	48	4	2 x DC	4	72,75	**410**		
1	0,03	3	0,95	4	30	48	4	3 x DC	4			87,85	**410**
2	0,03	4			30	48	4	2 x DC	4	73,97	**420**		
2	0,03	6	1,90	8	30	48	4	3 x DC	4			89,04	**420**
3	0,03	6			30	60	6	2 x DC	4	85,67	**030**		
3	0,03	9	2,90	12	30	60	6	3 x DC	4			102,30	**030**
4	0,05	8			30	60	6	2 x DC	4	90,26	**040**		
4	0,05	12	3,90	16	30	60	6	3 x DC	4			104,70	**040**
6	0,05	12				60	6	2 x DC	4	86,64	**060**		
6	0,05	18	5,90	24		60	6	3 x DC	4			102,30	**060**
8	0,05	16				60	8	2 x DC	4	126,40	**080**		
8	0,05	24	7,90	32		70	8	3 x DC	4			144,50	**080**
10	0,05	20				70	10	2 x DC	4	153,00	**100**		
10	0,05	30	9,90	40		80	10	3 x DC	4			174,50	**100**
12	0,05	24				70	12	2 x DC	4	173,40	**120**		
12	0,05	36	11,90	44		90	12	3 x DC	4			199,90	**120**
P											○		○
M													
K													
N													
S													
H											●		●
O													

→ v_c/f_z Page 350

MonsterMill – Ball Nosed Cutter

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy: ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

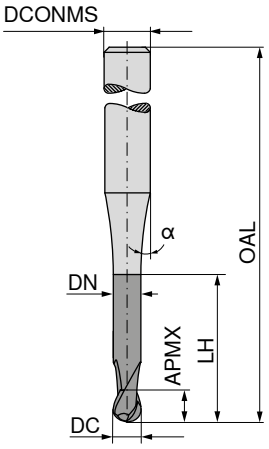

Factory standard | Factory standard

DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	53 600 ... EUR V1		53 601 ... EUR V1	
0,2	0,5		0,5	15	48	4	2,5 x DC	2	67,37	**302**		
0,2	0,5	0,18	1,0	15	48	4	5 x DC	2	67,37	**402**		
0,3	0,5	0,27	1,0	15	48	4	3,3 x DC	2	63,86	**303**		
0,3	0,5	0,27	2,0	15	48	4	6,7 x DC	2	63,86	**403**		
0,4	0,5	0,35	1,0	15	48	4	2,5 x DC	2	63,86	**304**		
0,4	0,5	0,35	2,0	15	48	4	5 x DC	2	63,86	**404**		
0,4	0,5	0,35	3,0	15	48	4	7,5 x DC	2	63,86	**504**		
0,5	0,5	0,45	1,0	15	48	4	2 x DC	2	62,02	**305**		
0,5	0,5	0,45	2,0	15	48	4	4 x DC	2	62,02	**405**		
0,5	0,5	0,45	2,5	15	48	4	5 x DC	2	62,02	**505**		
0,5	0,5	0,45	3,0	15	48	4	6 x DC	2	62,02	**605**		
0,5	0,5	0,45	4,0	15	48	4	8 x DC	2	62,02	**705**		
0,6	0,6	0,55	2,0	15	48	4	3,3 x DC	2	62,02	**306**		
0,6	0,6	0,55	3,0	15	48	4	5 x DC	2	62,02	**406**		
0,6	0,6	0,55	4,5	15	48	4	7,5 x DC	2	62,02	**506**		
0,6	0,6	0,55	6,0	15	48	4	10 x DC	2			62,02	**306**
0,8	1,0	0,75	2,0	15	48	4	2,5 x DC	2	60,36	**308**		
0,8	1,0	0,75	4,0	15	48	4	5 x DC	2	60,36	**408**		
0,8	1,0	0,75	6,0	15	48	4	7,5 x DC	2	60,36	**508**		
0,8	1,0	0,75	8,0	15	48	4	10 x DC	2			60,36	**308**
0,8	1,0	0,75	10,0	15	48	4	12,5 x DC	2			60,36	**408**
1,0	1,5	0,95	2,0	15	48	4	2 x DC	2	58,33	**310**		
1,0	1,5	0,95	4,0	15	48	4	4 x DC	2	58,33	**410**		
1,0	1,5	0,95	6,0	15	48	4	6 x DC	2	58,33	**510**		
1,0	1,5	0,95	8,0	15	48	4	8 x DC	2	58,33	**610**		
1,0	1,5	0,95	10,0	15	48	4	10 x DC	2			58,33	**310**
1,0	1,5	0,95	14,0	15	48	4	14 x DC	2			60,14	**410**
1,5	1,5	1,45	4,0	15	48	4	2,7 x DC	2	59,28	**315**		
1,5	1,5	1,45	6,0	15	48	4	4 x DC	2	59,28	**415**		
1,5	1,5	1,45	8,0	15	48	4	5,3 x DC	2	59,28	**515**		
1,5	1,5	1,45	10,0	15	48	4	6,7 x DC	2	59,28	**615**		
1,5	1,5	1,45	15,0	15	60	4	10 x DC	2			60,36	**315**

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 352+353

14

Continued on next page

MonsterMill – Ball Nosed Cutter

The specialist for finish machining tempered steel up to 70 HRC

- ▲ Radius accuracy: ± 0.005 mm
- ▲ T_x = maximum depth of cut
- ▲ DC Tolerance
  up to Ø 6 mm: 0/ -0.01 mm
  from Ø 6 mm: 0/ -0.02 mm

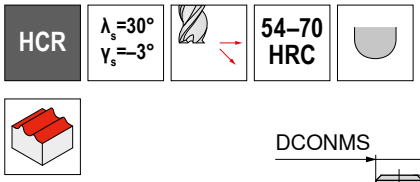

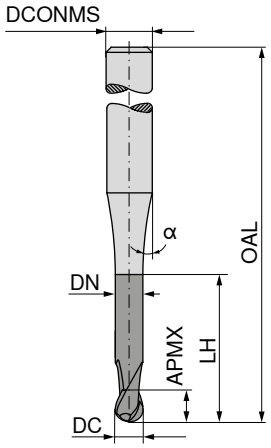

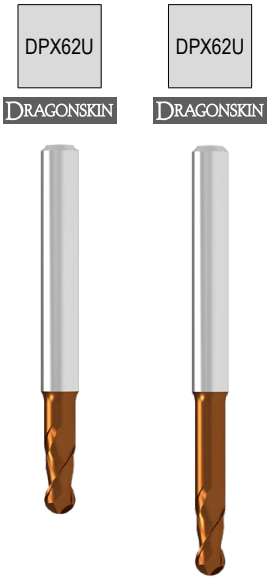



DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS h5 mm	T_x	ZEFP	53 600 ... EUR V1		53 601 ... EUR V1	
1,5	1,5	1,45	20,0	15	60	4	13,3 x DC	2			61,19	**415**
2,0	2,5	1,90	4,0	15	48	4	2 x DC	2	59,28	**320**		
2,0	2,5	1,90	6,0	15	48	4	3 x DC	2	59,28	**420**		
2,0	2,5	1,90	8,0	15	48	4	4 x DC	2	59,28	**520**		
2,0	2,5	1,90	10,0	15	48	4	5 x DC	2	60,36	**620**		
2,0	2,5	1,90	12,0	15	48	4	6 x DC	2	60,36	**720**		
2,0	2,5	1,90	16,0	15	60	4	8 x DC	2	61,31	**820**		
2,0	2,5	1,90	20,0	15	60	4	10 x DC	2			63,27	**320**
2,0	2,5	1,90	25,0	15	60	4	12,5 x DC	2			63,27	**420**
3,0	3,5	2,90	8,0	15	60	6	2,7 x DC	2	63,86	**330**		
3,0	3,5	2,90	12,0	15	60	6	4 x DC	2	63,86	**430**		
3,0	3,5	2,90	16,0	15	60	6	5,3 x DC	2	63,86	**530**		
3,0	3,5	2,90	20,0	15	70	6	6,7 x DC	2	65,33	**630**		
3,0	3,5	2,90	24,0	15	70	6	8 x DC	2	67,21	**730**		
4,0	4,5	3,90	8,0	15	60	6	2 x DC	2	63,86	**340**		
4,0	4,5	3,90	12,0	15	60	6	3 x DC	2	63,86	**440**		
4,0	4,5	3,90	16,0	15	60	6	4 x DC	2	63,86	**540**		
4,0	4,5	3,90	20,0	15	70	6	5 x DC	2	65,33	**640**		
4,0	4,5	3,90	24,0	15	70	6	6 x DC	2	67,21	**740**		
4,0	4,5	3,90	28,0	15	70	6	7 x DC	2	67,21	**840**		
6,0	6,5	5,90	12,0		60	6	2 x DC	2	63,86	**360**		
6,0	6,5	5,90	16,0		60	6	2,7 x DC	2	63,86	**460**		
6,0	6,5	5,90	20,0		60	6	3,3 x DC	2	63,86	**560**		
8,0	8,5	7,90	16,0		60	8	2 x DC	2	95,06	**380**		
8,0	8,5	7,90	40,0		80	8	5 x DC	2	101,90	**480**		
10,0	10,5	9,90	20,0	15	70	10	2 x DC	2	112,20	**100**		
10,0	10,5	9,90	40,0		90	10	4 x DC	2	121,60	**101**		
12,0	12,5	11,90	24,0		75	12	2 x DC	2	149,20	**120**		
12,0	12,5	11,90	40,0		90	12	3,3 x DC	2	159,40	**121**		

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 352+353

MonsterMill – Ball Nosed Cutter

The specialist for finish machining tempered steel up to 70 HRC

▲ Radius accuracy: ± 0,01 mm

HCR | λ_s=30° γ_s=–3° | 54–70 HRC

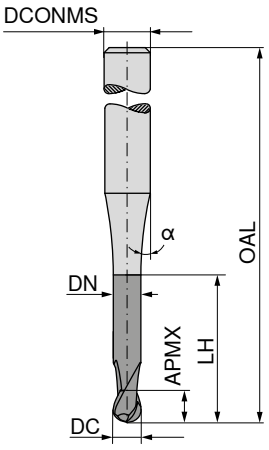

DPX62U

DRAGONSKIN

Factory standard

53 602 ...

DC mm	APMX mm	DN mm	LH mm	α°	OAL mm	DCONMS $_{h5}$ mm	T_x	ZEFP	EUR V1	
3	3,5	2,9	8	15	60	6	2,7 x DC	4	73,01	**330**
3	3,5	2,9	12	15	60	6	4 x DC	4	73,01	**430**
3	3,5	2,9	16	15	60	6	5,3 x DC	4	73,01	**530**
3	3,5	2,9	20	15	70	6	6,7 x DC	4	74,49	**630**
3	3,5	2,9	24	15	70	6	8 x DC	4	76,32	**730**
4	4,5	3,9	8	15	60	6	2 x DC	4	74,95	**340**
4	4,5	3,9	12	15	60	6	3 x DC	4	76,27	**440**
4	4,5	3,9	16	15	60	6	4 x DC	4	76,27	**540**
4	4,5	3,9	20	15	70	6	5 x DC	4	77,75	**640**
4	4,5	3,9	24	15	70	6	6 x DC	4	79,63	**740**
4	4,5	3,9	28	15	70	6	7 x DC	4	79,63	**840**
6	6,5	5,9	12		60	6	2 x DC	4	79,52	**360**
6	6,5	5,9	16		60	6	2,7 x DC	4	82,30	**460**
6	6,5	5,9	20		60	6	3,3 x DC	4	82,30	**560**
8	8,5	7,9	16		60	8	2 x DC	4	104,70	**380**
8	8,5	7,9	40		80	8	5 x DC	4	111,50	**480**
10	10,5	9,9	20		70	10	2 x DC	4	124,00	**100**
10	10,5	9,9	40		90	10	4 x DC	4	133,60	**101**
12	12,5	11,9	24		75	12	2 x DC	4	163,20	**120**
12	12,5	11,9	40		90	12	3,3 x DC	4	173,40	**121**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 351

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

PCR UNI | λ_s = 36° 38° | γ_s = 8° | HPC



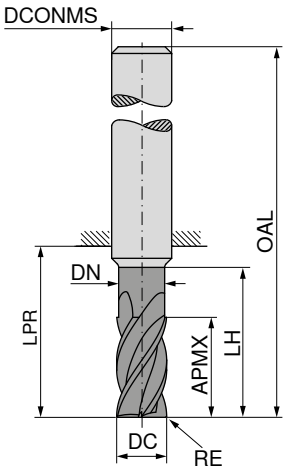



DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 613 ... EUR V1		52 614 ... EUR V1		52 615 ... EUR V1	
5,0	0,20	9			18	54	6	4	58,08	05000				
5,0	0,20	13	4,8	19	21	57	6	4			58,38	05000		
5,0	0,20	13	4,8	24	26	62	6	4					67,36	05000
5,7	0,20	10			18	54	6	4	58,08	057				
5,7	0,20	13	5,5	19	21	57	6	4			58,38	057		
5,7	0,20	13	5,5	24	26	62	6	4					67,36	057
6,0	0,20	10			18	54	6	4	58,08	060				
6,0	0,20	13	5,8	19	21	57	6	4			60,83	060		
6,0	0,20	13	5,8	24	26	62	6	4					69,36	060
6,7	0,20	11			22	58	8	4	69,67	067				
6,7	0,20	16	6,5	25	27	63	8	4			68,94	067		
6,7	0,20	16	6,4	30	32	68	8	4					91,93	067
7,0	0,20	11			22	58	8	4	69,67	070				
7,0	0,20	16	6,8	25	27	63	8	4			68,94	070		
7,0	0,20	16	6,7	30	32	68	8	4					91,93	070
7,7	0,20	12			22	58	8	4	69,67	077				
7,7	0,20	19	7,5	25	27	63	8	4			70,98	077		
7,7	0,20	21	7,4	30	32	68	8	4					91,93	077
8,0	0,20	12			22	58	8	4	69,67	080				
8,0	0,20	19	7,8	25	27	63	8	4			73,44	080		
8,0	0,20	21	7,7	30	32	68	8	4					96,04	080
8,7	0,32	13			26	66	10	4	90,54	087				
8,7	0,32	19	8,5	30	32	72	10	4			103,10	087		
8,7	0,32	22	8,4	38	40	80	10	4					114,80	087
9,0	0,32	13			26	66	10	4	90,54	090				
9,0	0,32	19	8,8	30	32	72	10	4			103,10	090		
9,0	0,32	22	8,7	38	40	80	10	4					114,80	090
9,7	0,32	14			26	66	10	4	90,54	097				
9,7	0,32	22	9,5	30	32	72	10	4			103,10	097		
9,7	0,32	22	9,4	38	40	80	10	4					114,80	097
10,0	0,32	14			26	66	10	4	90,54	100				
10,0	0,32	22	9,8	30	32	72	10	4			98,07	100		
10,0	0,32	22	9,7	38	40	80	10	4					109,40	100
11,7	0,32	16			28	73	12	4	118,20	117				
11,7	0,32	26	11,5	36	38	83	12	4			132,10	117		
11,7	0,32	26	11,3	46	48	93	12	4					157,00	117
12,0	0,32	16			28	73	12	4	118,20	120				
12,0	0,32	26	11,8	36	38	83	12	4			126,00	120		
12,0	0,32	26	11,6	46	48	93	12	4					149,50	120
P									●		●		●	
M									○		○		○	
K									●		●		●	
N														
S														
H														
O														

→ v_c/f_z Page 354+355

Continued on next page

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

PCR UNI | λ_s = 36° 38° | γ_s = 8° | HPC



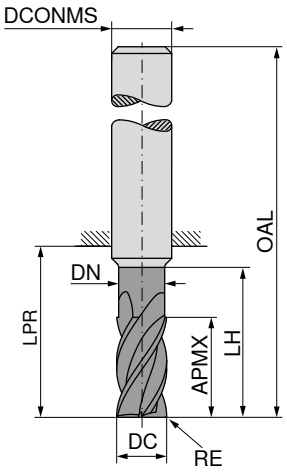





DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 613 ... EUR V1		52 614 ... EUR V1		52 615 ... EUR V1	
13,7	0,32	18			30	75	14	4	149,30	**137**				
13,7	0,32	26	13,5	36	38	83	14	4			156,60	**137**		
13,7	0,32	26	13,3	52	54	99	14	4					189,30	**137**
14,0	0,32	18			30	75	14	4	149,30	**140**				
14,0	0,32	26	13,8	36	38	83	14	4			162,40	**140**		
14,0	0,32	26	13,6	52	54	99	14	4					184,50	**140**
15,5	0,32	22			34	82	16	4	189,80	**155**				
15,5	0,32	32	15,3	42	44	92	16	4			212,90	**155**		
15,5	0,32	36	15,0	58	60	108	16	4					264,10	**155**
16,0	0,32	22			34	82	16	4	189,80	**160**				
16,0	0,32	32	15,8	42	44	92	16	4			220,20	**160**		
16,0	0,32	36	15,5	58	60	108	16	4					258,10	**160**
17,5	0,32	24			36	84	18	4	226,10	**175**				
17,5	0,32	32	17,3	42	44	92	18	4			249,20	**175**		
17,5	0,32	36	17,0	67	69	117	18	4					297,00	**175**
18,0	0,32	24			36	84	18	4	226,10	**180**				
18,0	0,32	32	17,8	42	44	92	18	4			256,50	**180**		
18,0	0,32	36	17,5	67	69	117	18	4					296,40	**180**
19,5	0,50	26			42	92	20	4	279,60	**195**				
19,5	0,50	38	19,3	52	54	104	20	4			336,10	**195**		
19,5	0,50	41	19,0	74	76	126	20	4					435,90	**195**
20,0	0,50	26			42	92	20	4	279,60	**200**				
20,0	0,50	38	19,8	52	54	104	20	4			347,70	**200**		
20,0	0,50	41	19,5	74	76	126	20	4					427,80	**200**
P									●		●		●	
M									○		○		○	
K									●		●		●	
N														
S														
H														
O														

→ v_c/f_z Page 354+355

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

▲ suitable for trochoidal milling
▲ Chip breaker 0.9 x DC

PCR UNI | λ_s=36° γ_s=10° | HPC



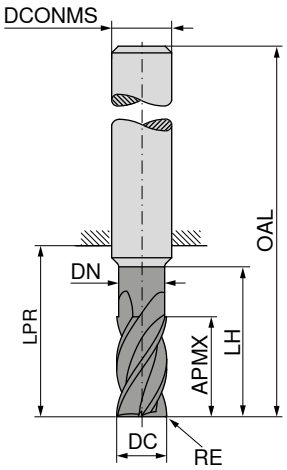

APA72S

DIN 6527

52 619 ...

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
5	0,20	17	4,8	24	26	62	6	4	71,60	**05202**
6	0,20	17	5,8	25	26	62	6	4	71,60	**06202**
8	0,20	24	7,7	30	32	68	8	4	95,29	**08202**
10	0,32	30	9,7	35	40	80	10	4	111,30	**10203**
12	0,32	36	11,6	45	48	93	12	4	150,30	**12203**
14	0,32	42	13,6	50	54	99	14	4	190,30	**14203**
16	0,32	48	15,5	56	60	108	16	4	256,40	**16203**
18	0,32	54	17,5	67	69	117	18	4	313,40	**18203**
20	0,50	60	19,5	70	76	126	20	4	421,10	**20205**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 356+357

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

PCR ALU | λ_s=36° γ_s=13° | HPC



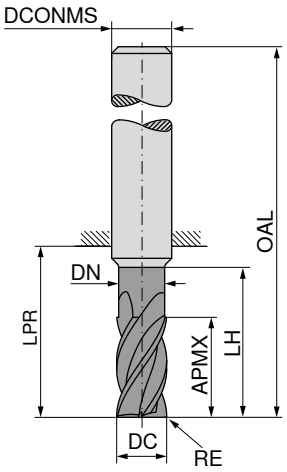

DLC DRAGONSKIN | DLC DRAGONSKIN

DIN 6527 | DIN 6527

DC f8	RE ±0,03	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	52 616 ... EUR V1		52 617 ... EUR V1	
mm	mm	mm	mm	mm	mm	mm	mm					
5,0	0,20	13	4,8	19	21	57	6	4	68,02	050		
5,0	0,20	13	4,8	24	26	62	6	4			75,03	050
5,7	0,20	13	5,5	19	21	57	6	4	68,02	057		
5,7	0,20	13	5,5	24	26	62	6	4			75,03	057
6,0	0,20	13	5,8	19	21	57	6	4	70,07	060		
6,0	0,20	13	5,8	24	26	62	6	4			77,26	060
7,7	0,20	19	7,5	25	27	63	8	4	80,68	077		
7,7	0,20	21	7,4	30	32	68	8	4			100,80	077
8,0	0,20	19	7,8	25	27	63	8	4	85,45	080		
8,0	0,20	21	7,7	30	32	68	8	4			105,20	080
9,0	0,32	19	8,8	30	32	72	10	4	112,80	090		
9,0	0,32	22	8,7	38	40	80	10	4			124,10	090
9,7	0,32	22	9,5	30	32	72	10	4	112,80	097		
9,7	0,32	22	9,4	38	40	80	10	4			124,10	097
10,0	0,32	22	9,8	30	32	72	10	4	109,40	100		
10,0	0,32	22	9,7	38	40	80	10	4			119,30	100
11,7	0,32	26	11,5	36	38	83	12	4	146,30	117		
11,7	0,32	26	11,3	46	48	93	12	4			170,20	117
12,0	0,32	26	11,8	36	38	83	12	4	139,40	120		
12,0	0,32	26	11,6	46	48	93	12	4			163,40	120
13,7	0,32	26	13,5	36	38	83	14	4	174,20	137		
13,7	0,32	26	13,3	52	54	99	14	4			207,40	137
14,0	0,32	26	13,8	36	38	83	14	4	180,50	140		
14,0	0,32	26	13,6	52	54	99	14	4			202,70	140
15,5	0,32	32	15,3	42	44	92	16	4	234,50	155		
15,5	0,32	36	15,0	58	60	108	16	4			285,80	155
16,0	0,32	32	15,8	42	44	92	16	4	241,70	160		
16,0	0,32	36	15,5	58	60	108	16	4			279,60	160
17,5	0,32	32	17,3	42	44	92	18	4	272,80	175		
17,5	0,32	36	17,0	67	69	117	18	4			320,30	175
18,0	0,32	32	17,8	42	44	92	18	4	279,30	180		
18,0	0,32	36	17,5	67	69	117	18	4			319,70	180
19,5	0,50	38	19,3	52	54	104	20	4	365,40	195		
19,5	0,50	41	19,0	74	76	126	20	4			464,90	195
20,0	0,50	38	19,8	52	54	104	20	4	377,80	200		
20,0	0,50	41	19,5	74	76	126	20	4			457,00	200

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 358+359

14

MonsterMill – Plunge milling cutter with corner radius

The specialist for ramping, plunging and helical milling

▲ suitable for trochoidal milling
▲ Chip breaker 0.9 x DC

PCR ALU | λ_s=36° γ_s=13° | HPC



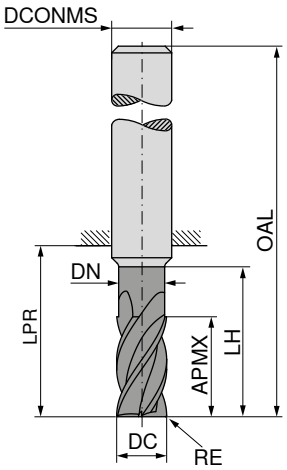

DLC

DRAGONSKIN

DIN 6527

52 618 ...

DC f8 mm	RE ±0,03 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
5	0,20	17	4,8	24	26	62	6	4	79,62	**05202**
6	0,20	18	5,8	25	26	62	6	4	79,62	**06202**
8	0,20	24	7,7	30	32	68	8	4	104,50	**08202**
10	0,32	30	9,7	35	40	80	10	4	121,70	**10203**
12	0,32	36	11,6	45	48	93	12	4	164,50	**12203**
14	0,32	42	13,6	50	54	99	14	4	209,00	**14203**
16	0,32	48	15,5	56	60	108	16	4	276,60	**16203**
18	0,32	54	17,5	67	69	117	18	4	345,90	**18203**
20	0,50	60	19,5	70	76	126	20	4	449,40	**20205**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 358–361

MonsterMill – Rough milling cutter

The specialist for rough machining steel and cast iron

▲ Cutting edges with irregular pitch
▲ With round cord profile





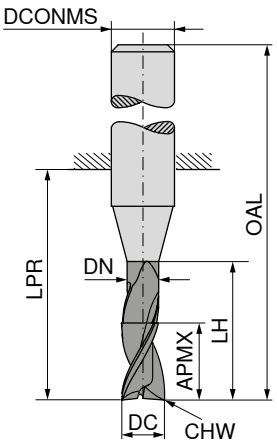



Factory standard | Factory standard | Factory standard



DC h11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 752 ... EUR V1		52 752 ... EUR V1		52 752 ... EUR V1	
1	1,5	0,9	3	10	38	3	0,09	3	149,30	010 [1]				
2	3,0	1,9	8	21	57	6	0,17	3	147,70	020				
3	5,0	2,9	14	21	57	6	0,17	3	166,60	030				
3	8,0	2,9	14	21	57	6	0,17	3			176,70	031		
3	5,0	2,9	19	26	62	6	0,17	3					169,60	032
4	8,0	3,8	18	21	57	6	0,17	3	165,20	040				
4	11,0	3,8	18	21	57	6	0,17	3			175,30	041		
4	8,0	3,8	23	26	62	6	0,17	3					168,00	042
5	9,0	4,8	19	21	57	6	0,17	3	160,70	050				
5	13,0	4,8	19	21	57	6	0,17	3			172,60	051		
5	9,0	4,8	24	26	62	6	0,17	3					165,20	052
6	10,0	5,8	20	21	57	6	0,17	4	157,80	060				
6	13,0	5,8	20	21	57	6	0,17	4			169,60	061		
6	10,0	5,8	25	26	62	6	0,17	4					160,70	062
8	12,0	7,7	25	27	63	8	0,28	4	173,90	080				
8	19,0	7,7	25	27	63	8	0,28	4			207,20	081		
8	12,0	7,7	30	32	68	8	0,28	4					176,70	082
10	15,0	9,5	30	32	72	10	0,28	4	195,50	100				
10	22,0	9,5	30	32	72	10	0,28	4			215,80	101		
10	15,0	9,5	35	40	80	10	0,28	4					202,80	102
12	18,0	11,5	35	38	83	12	0,28	4	240,60	120				
12	26,0	11,5	35	38	83	12	0,28	4			262,20	121		
12	18,0	11,5	45	48	93	12	0,28	4					252,10	122
14	21,0	13,5	35	38	83	14	0,28	4	281,00	140				
14	26,0	13,5	35	38	83	14	0,28	4			292,50	141		
14	21,0	13,5	50	54	99	14	0,28	4					304,30	142
16	24,0	15,5	40	44	92	16	0,43	4	391,00	160				
16	32,0	15,5	40	44	92	16	0,43	4			426,00	161		
16	24,0	15,5	55	60	108	16	0,43	4					424,50	162
20	30,0	19,5	50	54	104	20	0,43	4	523,00	200				
20	38,0	19,5	50	54	104	20	0,43	4			556,40	201		
20	30,0	19,5	70	76	126	20	0,43	4					575,00	202

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O			

1) DIN 6535 HA Shank

→ v_c/f_z Page 362–365

14

MonsterMill – FRP CR fine pitched

The specialist for machining carbon fibre-reinforced plastics

- ▲ Compression zone across the entire cutting length
- ▲ right-hand cutting
- ▲ fine cross-pitched version
- ▲ Two effective end cutting edges



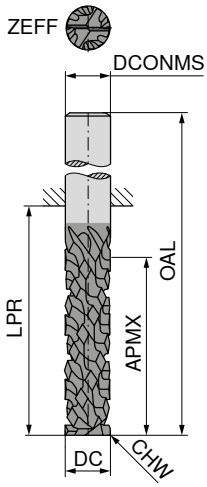

Factory standard

52 598 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFF	EUR V1/5B	
6,000	18	23,5	60	6,000	0,1	2	236,60	**06000**
6,350	18	23,5	60	6,350	0,1	2	254,40	**06350**
8,000	26	33,0	70	8,000	0,1	2	286,40	**08000**
9,525	30	40,0	80	9,525	0,1	2	322,90	**09525**
10,000	30	40,0	80	10,000	0,1	2	325,70	**10000**
12,000	30	41,0	85	12,000	0,1	2	422,00	**12000**
12,700	30	41,0	85	12,700	0,1	2	457,30	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f Page 329

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

MonsterMill – FRP CR coarse pitched

The specialist for machining carbon fibre-reinforced plastics

- ▲ Compression zone across the entire cutting length
- ▲ right-hand cutting
- ▲ coarse cross-pitched version
- ▲ One effective end cutting edge



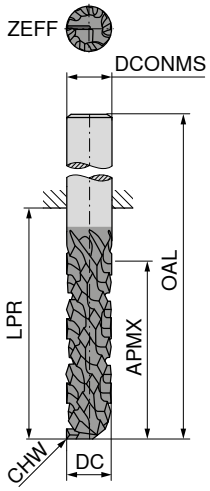

Factory standard

52 599 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFF	EUR V1/5B	
6,000	18	23,5	60	6,000	0,1	1	236,60	**06000**
6,350	18	23,5	60	6,350	0,1	1	254,40	**06350**
8,000	26	33,0	70	8,000	0,1	1	286,40	**08000**
9,525	30	40,0	80	9,525	0,1	1	319,40	**09525**
10,000	30	40,0	80	10,000	0,1	1	322,20	**10000**
12,000	30	41,0	85	12,000	0,1	1	356,40	**12000**
12,700	30	41,0	85	12,700	0,1	1	391,70	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f Page 329

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

14

MonsterMill – FRP

The specialist for machining carbon fibre-reinforced plastics

- ▲ optimal removal of CFRP dust
- ▲ right-hand cutting
- ▲ straight-fluted, neutral cut
- ▲ Four end cutting edges / two central cutting edges





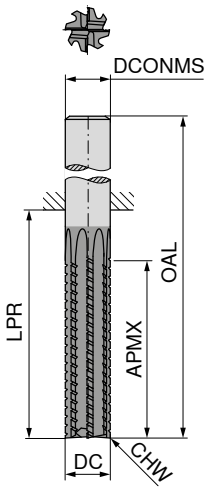

Factory standard

52 595 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1/5B	
6,000	25	35	70	6,000	0,1	8	249,70	**06000**
6,350	25	35	70	6,350	0,1	8	266,90	**06350**
8,000	30	40	80	8,000	0,1	8	300,70	**08000**
9,525	32	44	85	9,525	0,1	8	327,10	**09525**
10,000	32	45	85	10,000	0,1	8	341,50	**10000**
12,000	32	46	95	12,000	0,1	8	369,90	**12000**
12,700	32	46	95	12,700	0,1	8	407,70	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 329

MonsterMill – FRP left-hand helix

The specialist for machining carbon fibre-reinforced plastics

- ▲ optimal removal of CFRP dust
- ▲ right-hand cutting
- ▲ slightly left-fluted, pushing cut
- ▲ Four end cutting edges / two central cutting edges

FRP

λ_s=–7°
γ_s= 0°





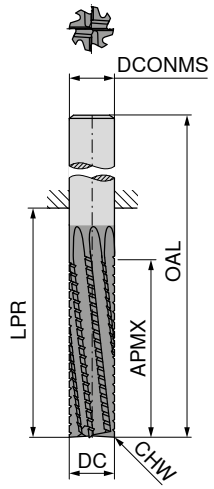

DIAMOND

Factory standard

52 596 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1/5B	
6,000	25	38	70	6,000	0,1	8	249,70	**06000**
6,350	25	39	70	6,350	0,1	8	266,90	**06350**
8,000	30	43	80	8,000	0,1	8	300,70	**08000**
9,525	32	48	85	9,525	0,1	8	327,10	**09525**
10,000	32	49	85	10,000	0,1	8	341,50	**10000**
12,000	32	53	95	12,000	0,1	8	369,90	**12000**
12,700	32	54	95	12,700	0,1	8	407,70	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 329

14

MonsterMill – FRP right-hand helix

The specialist for machining carbon fibre-reinforced plastics

- ▲ optimal removal of CFRP dust
- ▲ right-hand cutting
- ▲ slightly right-fluted, pulling cut
- ▲ Four end cutting edges / two central cutting edges

FRP

λ_s=7°
γ_s=0°



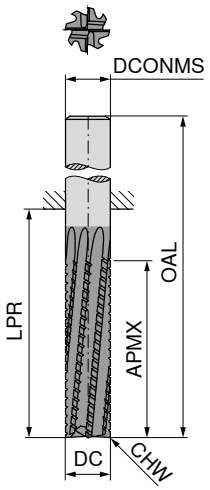

DIAMOND

Factory standard

52 597 ...

DC h11 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1/5B	
6,000	25	35	70	6,000	0,1	8	249,70	**06000**
6,350	25	35	70	6,350	0,1	8	266,90	**06350**
8,000	30	40	80	8,000	0,1	8	300,70	**08000**
9,525	32	44	85	9,525	0,1	8	327,10	**09525**
10,000	32	45	85	10,000	0,1	8	341,50	**10000**
12,000	32	49	95	12,000	0,1	8	369,90	**12000**
12,700	32	49	95	12,700	0,1	8	407,70	**12700**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 329

CircularLine – End milling cutter

The specialist for trochoidal machining

- ▲ Chip breaker 0.9 x DC
- ▲ 53 585 ... Cutting depth: 2 x DC
- ▲ 53 587 ... Cutting depth: 3 x DC

CCR UNI | λ_s 30° 31° | γ_s = 8° | HPC

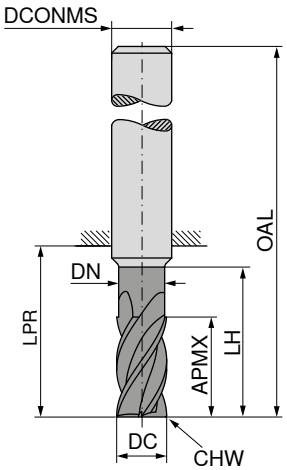

Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 585 ... EUR V1/5B		53 587 ... EUR V1/5B	
6	13	5,8	19	21	57	6	0,2	6	61,37	060		
6	19	5,8	25	27	63	6	0,2	6			61,86	060
8	21	7,7	25	27	63	8	0,2	6	80,01	080		
8	25	7,7	33	35	71	8	0,2	6			80,55	080
10	22	9,7	30	32	72	10	0,2	6	102,80	100		
10	31	9,7	41	43	83	10	0,2	6			112,80	100
12	26	11,6	36	38	83	12	0,2	6	132,20	120		
12	37	11,6	47	49	94	12	0,2	6			133,20	120
14	26	13,6	36	38	83	14	0,2	6	181,90	14000		
14	43	13,6	55	59	104	14	0,2	6			237,20	14000
16	36	15,5	42	44	92	16	0,2	6	263,60	160		
16	49	15,5	61	63	111	16	0,2	6			275,30	160
18	36	17,5	42	44	92	18	0,2	6	362,90	18000		
18	55	17,5	69	73	121	18	0,2	6			382,90	18000
20	41	19,5	52	54	104	20	0,2	6	379,10	200		
20	61	19,5	75	77	127	20	0,2	6			385,40	200
P										●		●
M										○		○
K										●		●
N												
S										○		○
H												
O												

→ v_c/f_z Page 366+367

CircularLine – End milling cutter

The specialist for trochoidal machining

▲ Chip breaker 0,9 x DC
▲ Cutting depth: 4 x DC

CCR UNI | λ_s=35° γ_s= 36° 8° | HPC



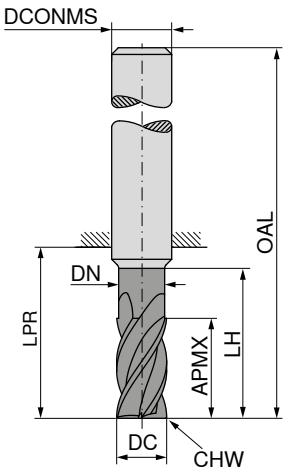

DPX72S

DRAGONSKIN

Factory standard

53 589 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	EUR V1/5B	
6	25	5,8	29	31	67	6	0,2	5	64,02	**060**
8	33	7,7	38	40	76	8	0,2	5	82,71	**080**
10	41	9,7	47	49	89	10	0,2	5	115,00	**100**
12	49	11,6	55	57	102	12	0,2	5	140,10	**120**
14	57	13,6	64	68	113	14	0,2	5	248,50	**14000**
16	65	15,5	73	75	123	16	0,2	5	281,00	**160**
18	73	17,5	82	86	134	18	0,2	5	385,90	**18000**
20	82	19,5	91	93	143	20	0,2	5	395,60	**200**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 2 x DC

CCR UNI | λ_s=30° γ_s= 8° | HPC



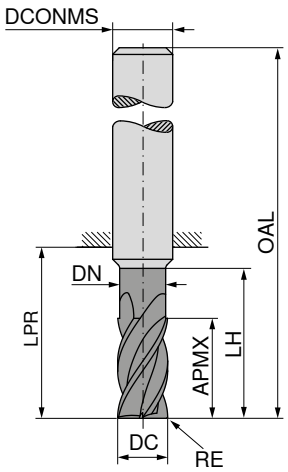

DPX72S

DRAGONSKIN

Factory standard

53 586 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	13	5,8	19	21	57	6	6	61,37	**06002**
6	1,0	13	5,8	19	21	57	6	6	61,70	**06010**
6	1,5	13	5,8	19	21	57	6	6	61,70	**06015**
8	0,2	21	7,7	25	27	63	8	6	80,01	**08002**
8	1,0	21	7,7	25	27	63	8	6	81,93	**08010**
8	1,5	21	7,7	25	27	63	8	6	81,93	**08015**
8	2,0	21	7,7	25	27	63	8	6	81,93	**08020**
10	0,2	22	9,7	30	32	72	10	6	102,80	**10002**
10	1,0	22	9,7	30	32	72	10	6	105,60	**10010**
10	1,5	22	9,7	30	32	72	10	6	105,60	**10015**
10	1,6	22	9,7	30	32	72	10	6	105,60	**10016**
10	2,0	22	9,7	30	32	72	10	6	105,60	**10020**
12	0,2	26	11,6	36	38	83	12	6	132,20	**12002**
12	1,0	26	11,6	36	38	83	12	6	132,90	**12010**
12	1,5	26	11,6	36	38	83	12	6	132,90	**12015**
12	1,6	26	11,6	36	38	83	12	6	132,90	**12016**
12	2,0	26	11,6	36	38	83	12	6	132,90	**12020**
12	3,0	26	11,6	36	38	83	12	6	132,90	**12030**
14	0,2	26	13,6	36	38	83	14	6	157,20	**14002**
14	1,0	26	13,6	36	38	83	14	6	158,50	**14010**
14	1,5	26	13,6	36	38	83	14	6	158,50	**14015**
14	1,6	26	13,6	36	38	83	14	6	158,50	**14016**
14	2,0	30	13,6	36	38	83	14	6	158,50	**14020**
14	3,0	26	13,6	36	38	83	14	6	158,50	**14030**
16	0,2	36	15,5	42	44	92	16	6	263,60	**16002**
16	1,0	36	15,5	42	44	92	16	6	284,30	**16010**
16	1,5	36	15,5	42	44	92	16	6	274,70	**16015**
16	1,6	36	15,5	42	44	92	16	6	274,70	**16016**
16	2,0	36	15,5	42	44	92	16	6	274,70	**16020**
16	3,0	36	15,5	42	44	92	16	6	274,70	**16030**
16	4,0	36	15,5	42	44	92	16	6	274,70	**16040**
18	0,2	36	17,5	42	44	92	18	6	313,70	**18002**
18	1,0	36	17,5	42	44	92	18	6	316,30	**18010**
18	1,5	36	17,5	42	44	92	18	6	316,30	**18015**
18	1,6	36	17,5	42	44	92	18	6	316,30	**18016**
18	2,0	36	17,5	42	44	92	18	6	316,30	**18020**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

14

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 2 x DC

CCR UNI | λ_s=30° γ_s= 8° | HPC



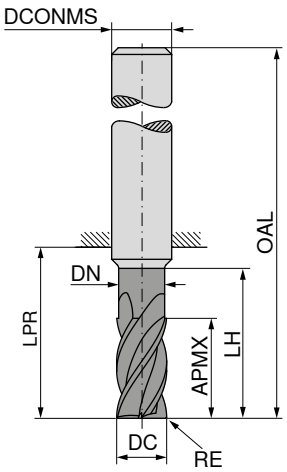

DPX72S

DRAGONSKIN

Factory standard

53 586 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
18	3,0	36	17,5	42	44	92	18	6	316,30	**18030**
18	4,0	36	17,5	42	44	92	18	6	316,30	**18040**
20	0,2	41	19,5	52	54	104	20	6	379,10	**20002**
20	1,0	41	19,5	52	54	104	20	6	383,00	**20010**
20	1,5	41	19,5	52	54	104	20	6	383,00	**20015**
20	1,6	41	19,5	52	54	104	20	6	383,00	**20016**
20	2,0	41	19,5	52	54	104	20	6	383,00	**20020**
20	3,0	41	19,5	52	54	104	20	6	383,00	**20030**
20	4,0	41	19,5	52	54	104	20	6	383,00	**20040**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR UNI | λ_s=30° γ_s= 8° | HPC



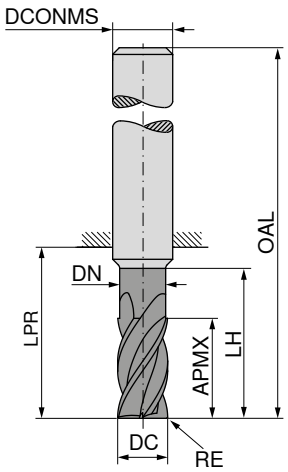

DPX72S

DRAGONSKIN

Factory standard

53 642 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	19	5,8	25	27	63	6	6	61,86	**06202**
6	1,0	19	5,8	25	27	63	6	6	63,75	**06210**
6	1,5	19	5,8	25	27	63	6	6	63,75	**06215**
8	0,2	25	7,7	33	35	71	8	6	80,55	**08202**
8	1,0	25	7,7	33	35	71	8	6	82,71	**08210**
8	1,5	25	7,7	33	35	71	8	6	82,71	**08215**
8	2,0	25	7,7	33	35	71	8	6	82,71	**08220**
10	0,2	31	9,7	41	43	83	10	6	112,80	**10202**
10	1,0	31	9,7	41	43	83	10	6	115,30	**10210**
10	1,5	31	9,7	41	43	83	10	6	115,30	**10215**
10	1,6	31	9,7	41	43	83	10	6	115,30	**10216**
10	2,0	31	9,7	41	43	83	10	6	115,30	**10220**
12	0,2	37	11,6	47	49	94	12	6	133,20	**12202**
12	1,0	37	11,6	47	49	94	12	6	136,60	**12210**
12	1,5	37	11,6	47	49	94	12	6	136,60	**12215**
12	1,6	37	11,6	47	49	94	12	6	136,60	**12216**
12	2,0	37	11,6	47	49	94	12	6	136,60	**12220**
12	3,0	37	11,6	47	49	94	12	6	136,60	**12230**
14	0,2	43	13,6	55	59	104	14	6	205,20	**14202**
14	1,0	43	13,6	55	59	104	14	6	209,40	**14210**
14	1,5	43	13,6	55	59	104	14	6	209,40	**14215**
14	1,6	43	13,6	55	59	104	14	6	209,40	**14216**
14	2,0	43	13,6	55	59	104	14	6	209,40	**14220**
14	3,0	43	13,6	55	59	104	14	6	209,40	**14230**
16	0,2	49	15,5	61	63	111	16	6	275,30	**16202**
16	1,0	49	15,5	61	63	111	16	6	278,10	**16210**
16	1,5	49	15,5	61	63	111	16	6	278,10	**16215**
16	1,6	49	15,5	61	63	111	16	6	278,10	**16216**
16	2,0	49	15,5	61	63	111	16	6	278,10	**16220**
16	3,0	49	15,5	61	63	111	16	6	278,10	**16230**
16	4,0	49	15,5	61	63	111	16	6	278,10	**16240**
18	0,2	55	17,5	69	73	121	18	6	331,00	**18202**
18	1,0	55	17,5	69	73	121	18	6	334,30	**18210**
18	1,5	55	17,5	69	73	121	18	6	334,30	**18215**
18	1,6	55	17,5	69	73	121	18	6	334,30	**18216**
18	2,0	55	17,5	69	73	121	18	6	334,30	**18220**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

14

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR UNI | λ_s=30° γ_s= 8° | HPC



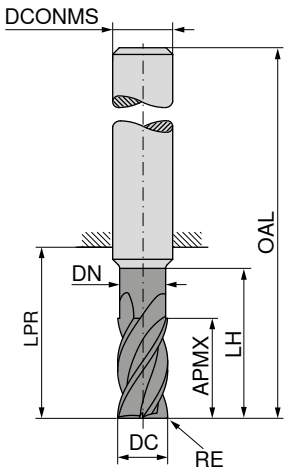

DPX72S

DRAGONSKIN

Factory standard

53 642 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
18	3,0	55	17,5	69	73	121	18	6	334,30	**18230**
18	4,0	55	17,5	69	73	121	18	6	334,30	**18240**
20	0,2	61	19,5	75	77	127	20	6	385,40	**20202**
20	1,0	61	19,5	75	77	127	20	6	389,70	**20210**
20	1,5	61	19,5	75	77	127	20	6	389,70	**20215**
20	1,6	61	19,5	75	77	127	20	6	389,70	**20216**
20	2,0	61	19,5	75	77	127	20	6	389,70	**20220**
20	3,0	61	19,5	75	77	127	20	6	389,70	**20230**
20	4,0	61	19,5	75	77	127	20	6	389,70	**20240**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 366+367

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 4 x DC

CCR UNI | λ_s=35° γ_s= 36° 9° | HPC



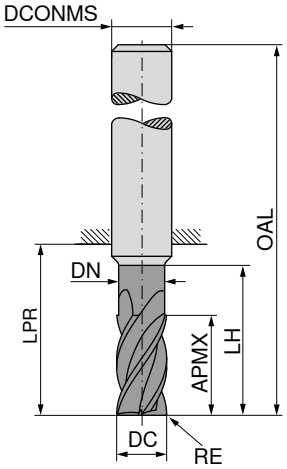

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	25	5,8	29	31	67	6	5	64,02	**06002**
6	1,0	25	5,8	29	31	67	6	5	65,90	**06010**
6	1,5	25	5,8	29	31	67	6	5	65,90	**06015**
8	0,2	33	7,7	38	40	76	8	5	82,71	**08002**
8	1,0	33	7,7	38	40	76	8	5	84,87	**08010**
8	1,5	33	7,7	38	40	76	8	5	84,87	**08015**
8	2,0	33	7,7	38	40	76	8	5	84,87	**08020**
10	0,2	41	9,7	47	49	89	10	5	115,00	**10002**
10	1,0	41	9,7	47	49	89	10	5	117,60	**10010**
10	1,5	41	9,7	47	49	89	10	5	117,60	**10015**
10	1,6	41	9,7	47	49	89	10	5	117,60	**10016**
10	2,0	41	9,7	47	49	89	10	5	117,60	**10020**
12	0,2	49	11,6	55	57	102	12	5	140,10	**12002**
12	1,0	49	11,6	55	57	102	12	5	143,60	**12010**
12	1,5	49	11,6	55	57	102	12	5	143,60	**12015**
12	1,6	49	11,6	55	57	102	12	5	143,60	**12016**
12	2,0	49	11,6	55	57	102	12	5	143,60	**12020**
12	3,0	49	11,6	55	57	102	12	5	143,60	**12030**
14	0,2	57	13,6	64	68	113	14	5	214,80	**14002**
14	1,0	57	13,6	64	68	113	14	5	219,20	**14010**
14	1,5	57	13,6	64	68	113	14	5	219,20	**14015**
14	1,6	57	13,6	64	68	113	14	5	219,20	**14016**
14	2,0	57	13,6	64	68	113	14	5	219,20	**14020**
14	3,0	57	13,6	64	68	113	14	5	219,20	**14030**
16	0,2	65	15,5	73	75	123	16	5	281,00	**16002**
16	1,0	65	15,5	73	75	123	16	5	285,40	**16010**
16	1,5	65	15,5	73	75	123	16	5	285,40	**16015**
16	1,6	65	15,5	73	75	123	16	5	285,40	**16016**
16	2,0	65	15,5	73	75	123	16	5	285,40	**16020**
16	3,0	65	15,5	73	75	123	16	5	285,40	**16030**
16	4,0	65	15,5	73	75	123	16	5	285,40	**16040**
18	0,2	73	17,5	82	86	134	18	5	333,60	**18002**
18	1,0	73	17,5	82	86	134	18	5	337,20	**18010**
18	1,5	73	17,5	82	86	134	18	5	337,20	**18015**
18	1,6	73	17,5	82	86	134	18	5	337,20	**18016**
18	2,0	73	17,5	82	86	134	18	5	337,20	**18020**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 4 x DC

CCR UNI | λ_s=35° γ_s= 36° 9° | HPC



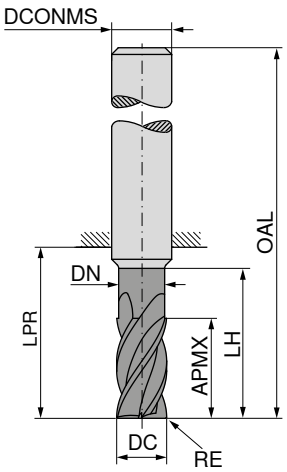

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0.05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
18	3,0	73	17,5	82	86	134	18	5	337,20	**18030**
18	4,0	73	17,5	82	86	134	18	5	337,20	**18040**
20	0,2	82	19,5	91	93	143	20	5	395,60	**20002**
20	1,0	82	19,5	91	93	143	20	5	401,30	**20010**
20	1,5	82	19,5	91	93	143	20	5	401,30	**20015**
20	1,6	82	19,5	91	93	143	20	5	401,30	**20016**
20	2,0	82	19,5	91	93	143	20	5	401,30	**20020**
20	3,0	82	19,5	91	93	143	20	5	401,30	**20030**
20	4,0	82	19,5	91	93	143	20	5	401,30	**20040**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 5 x DC

CCR UNI | λ_s=35° γ_s= 36° 9° | HPC

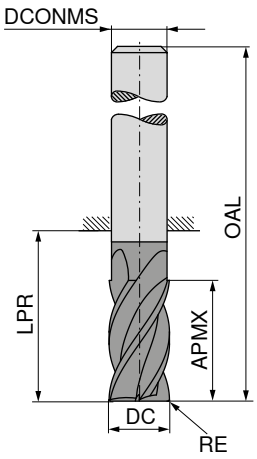

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6,0	0,2	31	39	75	6	5	78,75	**06402**
6,0	1,0	31	39	75	6	5	78,75	**06410**
6,0	1,5	31	39	75	6	5	78,75	**06415**
8,0	0,2	41	49	85	8	5	90,78	**08402**
8,0	1,0	41	49	85	8	5	90,78	**08410**
8,0	1,5	41	49	85	8	5	90,78	**08415**
8,0	2,0	41	49	85	8	5	90,78	**08420**
10,0	0,2	51	60	100	10	5	125,30	**10402**
10,0	1,0	51	60	100	10	5	125,30	**10410**
10,0	1,5	51	60	100	10	5	125,30	**10415**
10,0	1,6	51	60	100	10	5	125,30	**10416**
10,0	2,0	51	60	100	10	5	125,30	**10420**
12,0	0,2	61	70	115	12	5	155,30	**12402**
12,0	1,0	61	70	115	12	5	155,30	**12410**
12,0	1,5	61	70	115	12	5	155,30	**12415**
12,0	1,6	61	70	115	12	5	155,30	**12416**
12,0	2,0	61	70	115	12	5	155,30	**12420**
12,0	3,0	61	70	115	12	5	155,30	**12430**
14,0	0,2	71	81	126	14	5	319,10	**14402**
14,0	1,0	71	81	126	14	5	319,10	**14410**
14,0	1,5	71	81	126	14	5	319,10	**14415**
14,0	1,6	71	81	126	14	5	319,10	**14416**
14,0	2,0	71	81	126	14	5	319,10	**14420**
14,0	3,0	71	81	126	14	5	319,10	**14430**
16,0	0,2	81	92	140	16	5	315,70	**16402**
16,0	1,0	81	92	140	16	5	315,70	**16410**
16,0	1,5	81	92	140	16	5	315,70	**16415**
16,0	1,6	81	92	140	16	5	315,70	**16416**
16,0	2,0	81	92	140	16	5	315,70	**16420**
16,0	3,0	81	92	140	16	5	315,70	**16430**
16,0	4,0	81	92	140	16	5	315,70	**16440**
18,0	0,2	91	102	150	18	5	361,00	**18402**
18,0	1,0	91	102	150	18	5	361,00	**18410**
18,0	1,5	91	102	150	18	5	361,00	**18415**
18,0	1,6	91	102	150	18	5	361,00	**18416**
18,0	2,0	91	102	150	18	5	361,00	**18420**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 5 x DC

CCR UNI | λ_s 35° γ_s 36° 9° | HPC

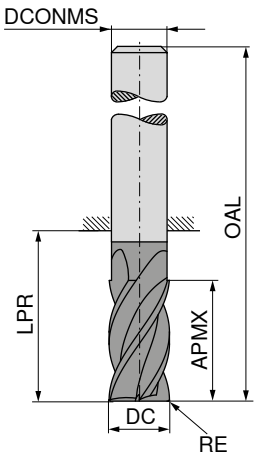

DPX72S

DRAGONSKIN

Factory standard

53 593 ...

DC e8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
18,0	3,0	91	102	150	18	5	361,00	**18430**
18,0	4,0	91	102	150	18	5	361,00	**18440**
20,0	0,2	102	113	163	20	5	436,00	**20402**
20,0	1,0	102	113	163	20	5	436,00	**20410**
20,0	1,5	102	113	163	20	5	436,00	**20415**
20,0	1,6	102	113	163	20	5	436,00	**20416**
20,0	2,0	102	113	163	20	5	436,00	**20420**
20,0	3,0	102	113	163	20	5	436,00	**20430**
20,0	4,0	102	113	163	20	5	436,00	**20440**

P	●
M	○
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 368+369

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR VA | λ_s=30° γ_s= 8° | HPC



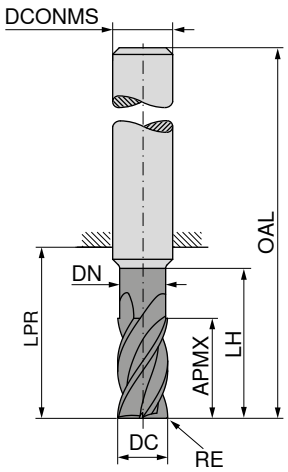

DPX22S

DRAGONSKIN

Factory standard

53 643 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	19	5,8	25	27	63	6	6	61,86	**06202**
6	1,0	19	5,8	25	27	63	6	6	63,75	**06210**
6	1,5	19	5,8	25	27	63	6	6	63,75	**06215**
8	0,2	25	7,7	33	35	71	8	6	80,55	**08202**
8	1,0	25	7,7	33	35	71	8	6	82,71	**08210**
8	1,5	25	7,7	33	35	71	8	6	82,71	**08215**
8	2,0	25	7,7	33	35	71	8	6	82,71	**08220**
10	0,2	31	9,7	41	43	83	10	6	112,80	**10202**
10	1,0	31	9,7	41	43	83	10	6	115,30	**10210**
10	1,5	31	9,7	41	43	83	10	6	115,30	**10215**
10	2,0	31	9,7	41	43	83	10	6	115,30	**10220**
12	0,2	37	11,6	47	49	94	12	6	133,20	**12202**
12	1,0	37	11,6	47	49	94	12	6	136,60	**12210**
12	1,5	37	11,6	47	49	94	12	6	136,60	**12215**
12	2,0	37	11,6	47	49	94	12	6	136,60	**12220**
12	3,0	37	11,6	47	49	94	12	6	136,60	**12230**
14	0,2	43	13,6	55	59	104	14	6	205,20	**14202**
14	1,0	43	13,6	55	59	104	14	6	209,40	**14210**
14	1,5	43	13,6	55	59	104	14	6	209,40	**14215**
14	2,0	43	13,6	55	59	104	14	6	209,40	**14220**
14	3,0	43	13,6	55	59	104	14	6	209,40	**14230**
16	0,2	49	15,5	61	63	111	16	6	275,30	**16202**
16	1,0	49	15,5	61	63	111	16	6	278,10	**16210**
16	1,5	49	15,5	61	63	111	16	6	278,10	**16215**
16	2,0	49	15,5	61	63	111	16	6	278,10	**16220**
16	3,0	49	15,5	61	63	111	16	6	278,10	**16230**
16	4,0	49	15,5	61	63	111	16	6	278,10	**16240**
18	0,2	55	17,5	69	73	121	18	6	331,00	**18202**
18	1,0	55	17,5	69	73	121	18	6	334,30	**18210**
18	1,5	55	17,5	69	73	121	18	6	334,30	**18215**
18	2,0	55	17,5	69	73	121	18	6	334,30	**18220**
18	3,0	55	17,5	69	73	121	18	6	334,30	**18230**
18	4,0	55	17,5	69	73	121	18	6	334,30	**18240**
20	0,2	61	19,5	75	77	127	20	6	385,40	**20202**
20	1,0	61	19,5	75	77	127	20	6	389,70	**20210**
20	1,5	61	19,5	75	77	127	20	6	389,70	**20215**
20	2,0	61	19,5	75	77	127	20	6	389,70	**20220**
20	3,0	61	19,5	75	77	127	20	6	389,70	**20230**
20	4,0	61	19,5	75	77	127	20	6	389,70	**20040**

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c/f_z Page 370+371

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 4 x DC

CCR VA | λ_s=35° γ_s= 36° 9° | HPC



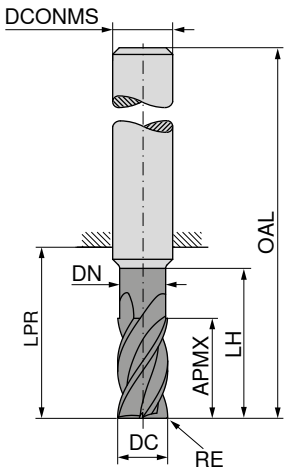

DPX22S

DRAGONSKIN



Factory standard

53 644 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	25	5,8	29	31	67	6	5	64,02	**06002**
6	1,0	25	5,8	29	31	67	6	5	65,90	**06010**
6	1,5	25	5,8	29	31	67	6	5	65,90	**06015**
8	0,2	33	7,7	38	40	76	8	5	82,71	**08002**
8	1,0	33	7,7	38	40	76	8	5	84,87	**08010**
8	1,5	33	7,7	38	40	76	8	5	84,87	**08015**
8	2,0	33	7,7	38	40	76	8	5	84,87	**08020**
10	0,2	41	9,7	47	49	89	10	5	115,00	**10002**
10	1,0	41	9,7	47	49	89	10	5	117,60	**10010**
10	1,5	41	9,7	47	49	89	10	5	117,60	**10015**
10	2,0	41	9,7	47	49	89	10	5	117,60	**10020**
12	0,2	49	11,6	55	57	102	12	5	140,10	**12002**
12	1,0	49	11,6	55	57	102	12	5	143,60	**12010**
12	1,5	49	11,6	55	57	102	12	5	143,60	**12015**
12	2,0	49	11,6	55	57	102	12	5	143,60	**12020**
12	3,0	49	11,6	55	57	102	12	5	143,60	**12030**
14	0,2	57	13,6	64	68	113	14	5	214,80	**14002**
14	1,0	57	13,6	64	68	113	14	5	219,20	**14010**
14	1,5	57	13,6	64	68	113	14	5	219,20	**14015**
14	2,0	57	13,6	64	68	113	14	5	219,20	**14020**
14	3,0	57	13,6	64	68	113	14	5	219,20	**14030**
16	0,2	65	15,5	73	75	123	16	5	281,00	**16002**
16	1,0	65	15,5	73	75	123	16	5	285,40	**16010**
16	1,5	65	15,5	73	75	123	16	5	285,40	**16015**
16	2,0	65	15,5	73	75	123	16	5	285,40	**16020**
16	3,0	65	15,5	73	75	123	16	5	285,40	**16030**
16	4,0	65	15,5	73	75	123	16	5	285,40	**16040**
18	0,2	73	17,5	82	86	134	18	5	333,60	**18002**
18	1,0	73	17,5	82	86	134	18	5	337,20	**18010**
18	1,5	73	17,5	82	86	134	18	5	337,20	**18015**
18	2,0	73	17,5	82	86	134	18	5	337,20	**18020**
18	3,0	73	17,5	82	86	134	18	5	337,20	**18030**
18	4,0	73	17,5	82	86	134	18	5	337,20	**18040**
20	0,2	82	19,5	91	93	143	20	5	395,60	**20002**
20	1,0	82	19,5	91	93	143	20	5	401,30	**20010**
20	1,5	82	19,5	91	93	143	20	5	401,30	**20015**
20	2,0	82	19,5	91	93	143	20	5	401,30	**20020**
20	3,0	82	19,5	91	93	143	20	5	401,30	**20030**
20	4,0	82	19,5	91	93	143	20	5	401,30	**20040**

P	○
M	●
K	
N	
S	●
H	
O	

→ v_c/f_z Page 372+373

CircularLine – End milling cutter

The specialist for trochoidal machining

- ▲ Chip breaker 1.8 x DC
- ▲ 53 590 ... Cutting depth: 3 x DC
- ▲ 53 591 ... Cutting depth: 4 x DC

CCR AL | λ_s=45° γ_s= 8°



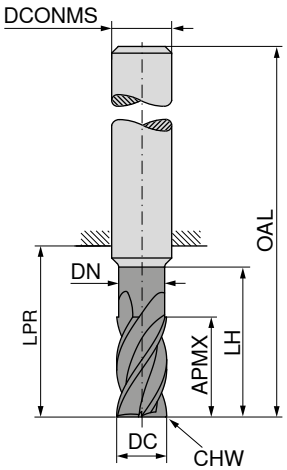

Factory standard | Factory standard

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	53 590 ... EUR V1/5B		53 591 ... EUR V1/5B	
6	19	5,8	24	30	66	6	0,2	4	65,03	**060**		
6	25	5,8	30	35	71	6	0,2	4			67,21	**060**
8	25	7,7	32	37	73	8	0,2	4	84,61	**080**		
8	33	7,7	40	44	80	8	0,2	4			86,78	**080**
10	31	9,7	40	49	89	10	0,2	4	117,90	**100**		
10	41	9,7	50	55	95	10	0,2	4			120,10	**100**
12	37	11,6	48	56	101	12	0,2	4	141,80	**120**		
12	49	11,6	60	64	109	12	0,2	4			149,30	**120**
14	43	13,0	56	60	105	14	0,2	4	217,20	**14000**		
14	57	13,0	70	74	119	14	0,2	4			222,40	**14000**
16	49	15,5	64	72	120	16	0,2	4	291,20	**160**		
16	65	15,5	80	84	132	16	0,2	4			297,00	**160**
18	56	17,0	72	76	124	18	0,2	4	333,70	**18000**		
18	74	17,0	90	94	142	18	0,2	4			360,00	**18000**
20	62	19,5	80	84	134	20	0,2	4	408,70	**200**		
20	82	19,5	100	104	154	20	0,2	4			418,70	**200**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 3 x DC

CCR AL | λ_s=45° γ_s= 8°



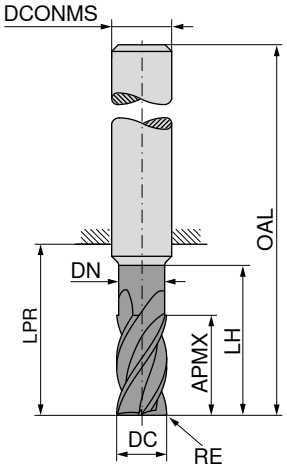

DLC

DRAGONSKIN

Factory standard

53 594 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	19	5,8	24	30	66	6	4	65,03	**06002**
6	1,0	19	5,8	24	30	66	6	4	66,93	**06010**
6	1,5	19	5,8	24	30	66	6	4	66,93	**06015**
8	0,2	25	7,7	32	37	73	8	4	84,61	**08002**
8	1,0	25	7,7	32	37	73	8	4	86,78	**08010**
8	1,5	25	7,7	32	37	73	8	4	86,78	**08015**
8	2,0	25	7,7	32	37	73	8	4	86,78	**08020**
10	0,2	31	9,7	40	49	89	10	4	117,90	**10002**
10	1,0	31	9,7	40	49	89	10	4	120,40	**10010**
10	1,5	31	9,7	40	49	89	10	4	120,40	**10015**
10	1,6	31	9,7	40	49	89	10	4	120,40	**10016**
10	2,0	31	9,7	40	49	89	10	4	120,40	**10020**
12	0,2	37	11,6	48	56	101	12	4	141,80	**12002**
12	1,0	37	11,6	48	56	101	12	4	144,70	**12010**
12	1,5	37	11,6	48	56	101	12	4	144,70	**12015**
12	1,6	37	11,6	48	56	101	12	4	144,70	**12016**
12	2,0	37	11,6	48	56	101	12	4	144,70	**12020**
12	3,0	37	11,6	48	56	101	12	4	144,70	**12030**
14	0,2	43	13,0	56	60	105	14	4	217,20	**14002**
14	1,0	43	13,0	56	60	105	14	4	221,80	**14010**
14	1,5	43	13,0	56	60	105	14	4	221,80	**14015**
14	1,6	43	13,0	56	60	105	14	4	221,80	**14016**
14	2,0	43	13,0	56	60	105	14	4	221,80	**14020**
14	3,0	43	13,0	56	60	105	14	4	221,80	**14030**
16	0,2	49	15,5	64	72	120	16	4	291,20	**16002**
16	1,0	49	15,5	64	72	120	16	4	294,20	**16010**
16	1,5	49	15,5	64	72	120	16	4	294,20	**16015**
16	1,6	49	15,5	64	72	120	16	4	294,20	**16016**
16	2,0	49	15,5	64	72	120	16	4	294,20	**16020**
16	3,0	49	15,5	64	72	120	16	4	294,20	**16030**
16	4,0	49	15,5	64	72	120	16	4	294,20	**16040**
18	0,2	56	17,0	72	76	124	18	4	333,70	**18002**
18	1,0	56	17,0	72	76	124	18	4	336,80	**18010**
18	1,5	56	17,0	72	76	124	18	4	336,80	**18015**
18	1,6	56	17,0	72	76	124	18	4	336,80	**18016**
18	2,0	56	17,0	72	76	124	18	4	336,80	**18020**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 3 x DC





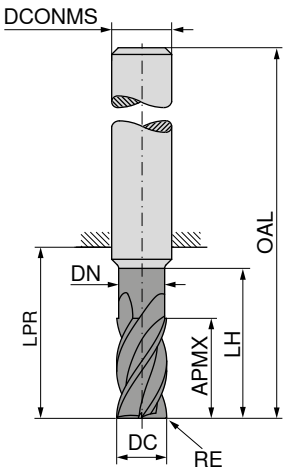

DRAGONSKIN

Factory standard

53 594 ...

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
18	3,0	56	17,0	72	76	124	18	4	336,80	**18030**
18	4,0	56	17,0	72	76	124	18	4	336,80	**18040**
20	0,2	62	19,5	80	84	134	20	4	408,70	**20002**
20	1,0	62	19,5	80	84	134	20	4	412,80	**20010**
20	1,5	62	19,5	80	84	134	20	4	412,80	**20015**
20	1,6	62	19,5	80	84	134	20	4	412,80	**20016**
20	2,0	62	19,5	80	84	134	20	4	412,80	**20020**
20	3,0	62	19,5	80	84	134	20	4	412,80	**20030**
20	4,0	62	19,5	80	84	134	20	4	412,80	**20040**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 4 x DC

CCR AL | λ_s=45° γ_s= 8°



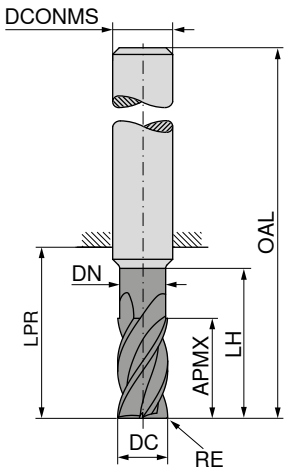

DLC

DRAGONSKIN

Factory standard

53 595 ...

DC $_{e8}$ mm	RE $_{\pm 0.05}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR V1/5B	
6	0,2	25	5,8	30	35	71	6	4	67,21	**06002**
6	1,0	25	5,8	30	35	71	6	4	69,09	**06010**
6	1,5	25	5,8	30	35	71	6	4	69,09	**06015**
8	0,2	33	7,7	40	44	80	8	4	86,78	**08002**
8	1,0	33	7,7	40	44	80	8	4	89,09	**08010**
8	1,5	33	7,7	40	44	80	8	4	89,09	**08015**
8	2,0	33	7,7	40	44	80	8	4	89,09	**08020**
10	0,2	41	9,7	50	55	95	10	4	120,10	**10002**
10	1,0	41	9,7	50	55	95	10	4	122,70	**10010**
10	1,5	41	9,7	50	55	95	10	4	122,70	**10015**
10	1,6	41	9,7	50	55	95	10	4	122,70	**10016**
10	2,0	41	9,7	50	55	95	10	4	122,70	**10020**
12	0,2	49	11,6	60	64	109	12	4	149,30	**12002**
12	1,0	49	11,6	60	64	109	12	4	152,20	**12010**
12	1,5	49	11,6	60	64	109	12	4	152,20	**12015**
12	1,6	49	11,6	60	64	109	12	4	152,20	**12016**
12	2,0	49	11,6	60	64	109	12	4	152,20	**12020**
12	3,0	49	11,6	60	64	109	12	4	152,20	**12030**
14	0,2	57	13,0	70	74	119	14	4	222,40	**14002**
14	1,0	57	13,0	70	74	119	14	4	224,80	**14010**
14	1,5	57	13,0	70	74	119	14	4	224,80	**14015**
14	1,6	57	13,0	70	74	119	14	4	224,80	**14016**
14	2,0	57	13,0	70	74	119	14	4	224,80	**14020**
14	3,0	57	13,0	70	74	119	14	4	224,80	**14030**
16	0,2	65	15,5	80	84	132	16	4	297,00	**16002**
16	1,0	65	15,5	80	84	132	16	4	301,40	**16010**
16	1,5	65	15,5	80	84	132	16	4	301,40	**16015**
16	1,6	65	15,5	80	84	132	16	4	301,40	**16016**
16	2,0	65	15,5	80	84	132	16	4	301,40	**16020**
16	3,0	65	15,5	80	84	132	16	4	301,40	**16030**
16	4,0	65	15,5	80	84	132	16	4	301,40	**16040**
18	0,2	74	17,0	90	94	142	18	4	360,00	**18002**
18	1,0	74	17,0	90	94	142	18	4	361,10	**18010**
18	1,5	74	17,0	90	94	142	18	4	361,10	**18015**
18	1,6	74	17,0	90	94	142	18	4	361,10	**18016**
18	2,0	74	17,0	90	94	142	18	4	361,10	**18020**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

Continued on next page

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 4 x DC

CCR AL | λ_s=45° γ_s= 8°



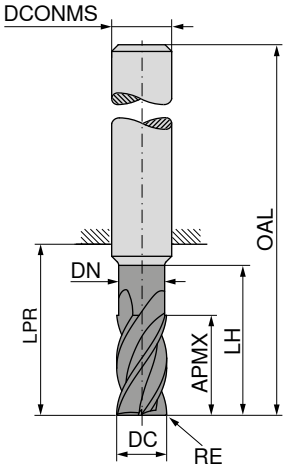

DLC
DRAGONSKIN

Factory standard

53 595 ...

DC e8 mm	RE ±0.05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
18	3,0	74	17,0	90	94	142	18	4	361,10	**18030**
18	4,0	74	17,0	90	94	142	18	4	361,10	**18040**
20	0,2	82	19,5	100	104	154	20	4	418,70	**20002**
20	1,0	82	19,5	100	104	154	20	4	423,10	**20010**
20	1,5	82	19,5	100	104	154	20	4	423,10	**20015**
20	1,6	82	19,5	100	104	154	20	4	423,10	**20016**
20	2,0	82	19,5	100	104	154	20	4	423,10	**20020**
20	3,0	82	19,5	100	104	154	20	4	423,10	**20030**
20	4,0	82	19,5	100	104	154	20	4	423,10	**20040**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 1.8 x DC
▲ Cutting depth: 5 x DC

CCR AL | λ_s=45° γ_s= 8°



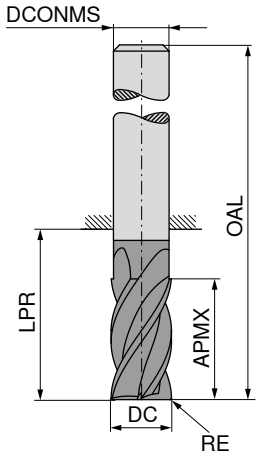

DLC
DRAGONSKIN

Factory standard

53 641 ...

DC h8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
6	0,2	31	40	76	6	4	80,68	**06002**
6	1,0	31	40	76	6	4	83,13	**06010**
6	1,5	31	40	76	6	4	83,13	**06015**
8	0,2	41	50	86	8	4	95,66	**08002**
8	1,0	41	50	86	8	4	98,10	**08010**
8	1,5	41	50	86	8	4	98,10	**08015**
8	2,0	41	50	86	8	4	98,10	**08020**
10	0,2	51	61	101	10	4	132,30	**10002**
10	1,0	51	61	101	10	4	135,10	**10010**
10	1,5	51	61	101	10	4	135,10	**10015**
10	2,0	51	61	101	10	4	135,10	**10020**
12	0,2	61	71	116	12	4	163,70	**12002**
12	1,0	61	71	116	12	4	167,60	**12010**
12	1,5	61	71	116	12	4	167,60	**12015**
12	2,0	61	71	116	12	4	167,60	**12020**
14	0,2	71	82	127	14	4	245,60	**14002**
14	1,0	71	82	127	14	4	248,30	**14010**
14	1,5	71	82	127	14	4	248,30	**14015**
14	2,0	71	82	127	14	4	248,30	**14020**
16	0,2	81	93	141	16	4	327,10	**16002**
16	1,0	81	93	141	16	4	331,30	**16010**
16	1,5	81	93	141	16	4	331,30	**16015**
16	2,0	81	93	141	16	4	331,30	**16020**
18	0,2	91	103	151	18	4	397,60	**18002**
18	1,0	91	103	151	18	4	399,00	**18010**
18	1,5	91	103	151	18	4	399,00	**18015**
18	2,0	91	103	151	18	4	399,00	**18020**
20	0,2	102	114	164	20	4	461,50	**20002**
20	1,0	102	114	164	20	4	466,70	**20010**
20	1,5	102	114	164	20	4	466,70	**20015**
20	2,0	102	114	164	20	4	466,70	**20020**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 374+375

CircularLine – End milling cutter with corner radius

The specialist for machining titanium and titanium alloys

- ▲ Chip breaker 0.9 x DC
- ▲ Long cutting depth version: 3 x DC
- ▲ Extra-long cutting depth version: 4 x DC

CCR Ti | λ_s=40° γ_s=10° | HPC



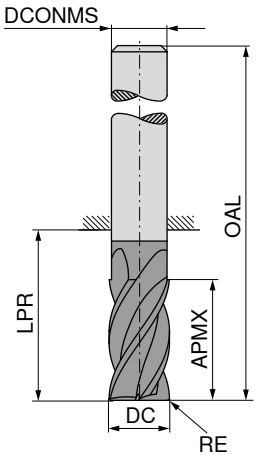

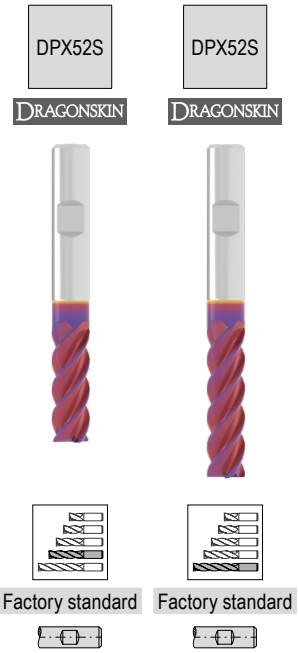

DC e8 mm	RE ±0,01 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	52 510 ... EUR V1		52 510 ... EUR V1	
6	0,1	18	29	65	6	5	89,71	06000		
6	0,1	24	31	67	6	5			96,71	06100
8	0,2	24	34	70	8	5	118,50	08000		
8	0,2	32	44	80	8	5			122,80	08100
10	0,2	30	40	80	10	5	147,80	10000		
10	0,2	40	50	90	10	5			155,70	10100
12	0,2	36	50	95	12	5	187,10	12000		
12	0,2	48	55	100	12	5			194,50	12100
16	0,2	48	62	110	16	5	283,80	16000		
16	0,3	64	72	120	16	5			300,50	16100
20	0,3	60	75	125	20	5	372,50	20000		
20	0,3	80	90	140	20	5			454,10	20100

P	○	○
M	○	○
K		
N		
S	●	●
H		
O		

→ v_c/f_z Page 376+377

14

CircularLine – End milling cutter with corner radius

The specialist for trochoidal machining

▲ Chip breaker 0.9 x DC
▲ Cutting depth: 3 x DC

CCR H | λ_s=50° γ_s=–6° | 45–70 HRC



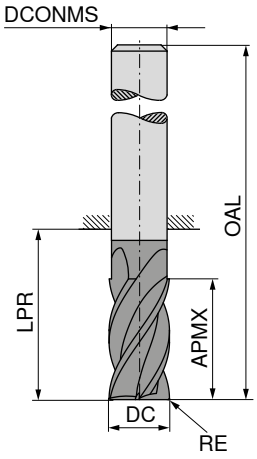

DPX62S

DRAGONSKIN

Factory standard

53 596 ...

DC $_{e8}$ mm	RE $_{\pm 0,05}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR V1/5B	
6	0,2	19	24	60	6	6	66,30	**06002**
6	1,0	19	24	60	6	6	66,30	**06010**
8	0,2	25	31	67	8	6	91,31	**08002**
8	1,0	25	31	67	8	6	91,31	**08010**
10	0,2	31	37	77	10	6	126,60	**10002**
10	1,0	31	37	77	10	6	126,60	**10010**
10	1,5	31	37	77	10	6	126,60	**10015**
12	0,2	37	43	88	12	6	150,20	**12002**
12	1,0	37	43	88	12	6	150,20	**12010**
12	1,5	37	43	88	12	6	150,20	**12015**
12	2,0	37	43	88	12	6	150,20	**12020**
12	3,0	37	43	88	12	6	150,20	**12030**
16	0,2	49	56	104	16	6	301,10	**16002**
16	1,0	49	56	104	16	6	301,10	**16010**
16	1,5	49	56	104	16	6	301,10	**16015**
16	2,0	49	56	104	16	6	301,10	**16020**
16	3,0	49	56	104	16	6	301,10	**16030**
20	0,2	61	68	118	20	6	434,00	**20002**
20	1,0	61	68	118	20	6	434,00	**20010**
20	1,5	61	68	118	20	6	434,00	**20015**
20	2,0	61	68	118	20	6	434,00	**20020**
20	3,0	61	68	118	20	6	434,00	**20030**

P	
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 378

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





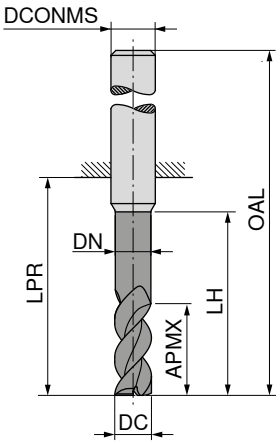

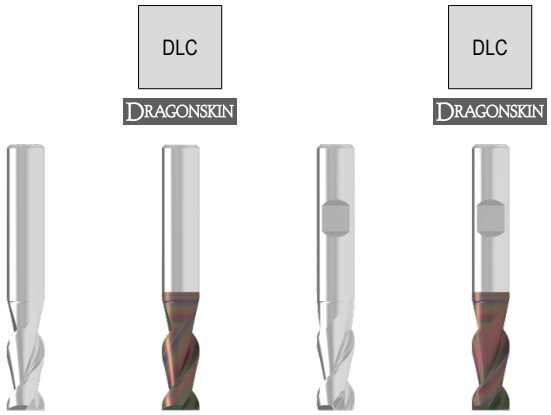

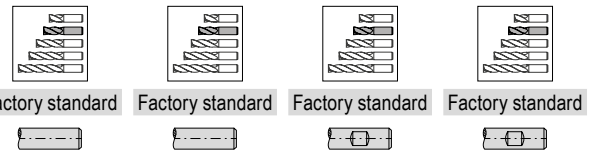

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 623 ... EUR V1/5B		53 625 ... EUR V1/5B		53 624 ... EUR V1/5B		53 626 ... EUR V1/5B	
5,0	10,5	4,8	15	22	58	6	2	33,93	**05100**	42,63	**05100**	33,93	**05100**	42,63	**05100**
5,5	13,0	5,3	18	22	58	6	2	41,38	**05600**	50,11	**05600**	41,38	**05600**	50,11	**05600**
6,0	13,0	5,8	18	22	58	6	2	38,12	**06100**	48,21	**06100**	38,12	**06100**	48,21	**06100**
6,5	17,0	6,2	24	28	64	8	2	43,76	**06600**	53,89	**06600**	43,76	**06600**	53,89	**06600**
7,0	17,0	6,7	24	28	64	8	2	42,68	**07100**	52,82	**07100**	42,68	**07100**	52,82	**07100**
7,5	17,0	7,2	24	28	64	8	2	41,53	**07600**	51,62	**07600**	41,53	**07600**	51,62	**07600**
8,0	17,0	7,7	24	28	64	8	2	39,65	**08100**	51,01	**08100**	39,65	**08100**	51,01	**08100**
8,5	21,0	8,2	30	34	74	10	2	67,52	**08600**	78,87	**08600**	67,52	**08600**	78,87	**08600**
9,0	21,0	8,7	30	34	74	10	2	65,72	**09100**	77,09	**09100**	65,72	**09100**	77,09	**09100**
9,5	21,0	9,2	30	34	74	10	2	63,90	**09600**	75,25	**09600**	63,90	**09600**	75,25	**09600**
10,0	21,0	9,7	30	34	74	10	2	60,93	**10100**	73,57	**10100**	60,93	**10100**	73,57	**10100**
10,5	25,0	10,1	36	40	85	12	2	93,33	**10600**	106,00	**10600**	93,33	**10600**	106,00	**10600**
11,0	25,0	10,6	36	40	85	12	2	90,79	**11100**	103,40	**11100**	90,79	**11100**	103,40	**11100**
11,5	25,0	11,1	36	40	85	12	2	88,08	**11600**	100,70	**11600**	88,08	**11600**	100,70	**11600**
12,0	25,0	11,6	36	40	85	12	2	86,46	**12100**	104,10	**12100**	86,46	**12100**	104,10	**12100**
12,5	29,0	12,1	42	46	91	14	2					124,50	**12600**	142,20	**12600**
13,0	29,0	12,6	42	46	91	14	2					123,40	**13100**	141,20	**13100**
13,5	29,0	13,1	42	46	91	14	2					122,40	**13600**	140,10	**13600**
14,0	29,0	13,6	42	46	91	14	2					123,60	**14100**	147,30	**14100**
14,5	33,0	14,0	48	52	100	16	2					169,00	**14600**	192,80	**14600**
15,0	33,0	14,5	48	52	100	16	2					165,20	**15100**	189,00	**15100**
15,5	33,0	15,0	48	52	100	16	2					161,20	**15600**	185,00	**15600**
16,0	33,0	15,5	48	52	100	16	2					169,90	**16100**	197,50	**16100**
16,5	38,0	16,0	54	58	106	18	2					219,60	**16600**	247,30	**16600**
17,0	38,0	16,5	54	58	106	18	2					213,70	**17100**	241,50	**17100**
17,5	38,0	17,0	54	58	106	18	2					207,40	**17600**	235,20	**17600**
18,0	38,0	17,5	54	58	106	18	2					204,80	**18100**	235,20	**18100**
18,5	42,0	18,0	60	64	114	20	2					271,50	**18600**	301,90	**18600**
19,0	42,0	18,5	60	64	114	20	2					264,10	**19100**	294,40	**19100**
19,5	42,0	19,0	60	64	114	20	2					256,50	**19600**	286,80	**19600**
20,0	42,0	19,5	60	64	114	20	2					252,00	**20100**	289,90	**20100**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





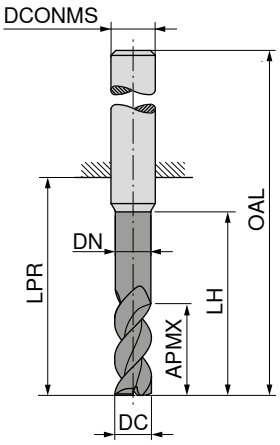

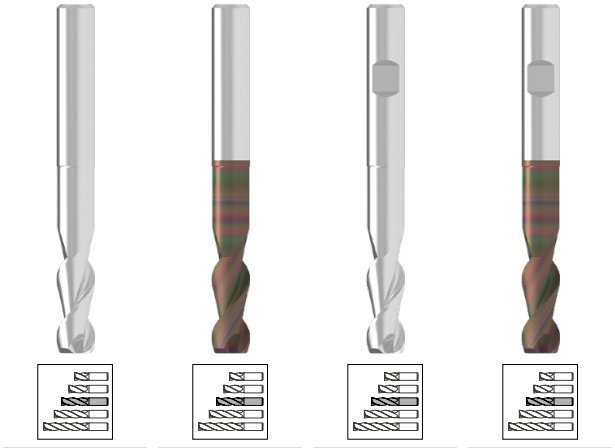

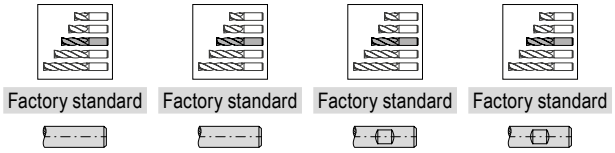

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	53 633 ... EUR V1/5B		53 635 ... EUR V1/5B		53 634 ... EUR V1/5B		53 636 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm									
2,0	5,5	1,8	10,0	19	55	6	2	30,44	**02300**	39,14	**02300**	30,44	**02300**	39,14	**02300**
2,5	6,5	2,3	12,5	22	58	6	2	38,96	**02800**	47,67	**02800**	38,96	**02800**	47,67	**02800**
3,0	8,0	2,8	15,0	22	58	6	2	39,98	**03300**	48,66	**03300**	39,98	**03300**	48,66	**03300**
3,5	10,5	3,3	20,0	26	62	6	2	37,66	**03800**	46,40	**03800**	37,66	**03800**	46,40	**03800**
4,0	10,5	3,8	20,0	26	62	6	2	38,48	**04300**	47,19	**04300**	38,48	**04300**	47,19	**04300**
4,5	13,0	4,3	25,0	34	70	6	2	39,76	**04800**	48,47	**04800**	39,76	**04800**	48,47	**04800**
5,0	13,0	4,8	25,0	34	70	6	2	40,72	**05300**	49,43	**05300**	40,72	**05300**	49,43	**05300**
5,5	16,0	5,3	30,0	34	70	6	2	49,65	**05800**	58,38	**05800**	49,65	**05800**	58,38	**05800**
6,0	16,0	5,8	30,0	34	70	6	2	45,72	**06300**	55,80	**06300**	45,72	**06300**	55,80	**06300**
6,5	21,0	6,2	40,0	44	80	8	2	54,73	**06800**	64,83	**06800**	54,73	**06800**	64,83	**06800**
7,0	21,0	6,7	40,0	44	80	8	2	53,36	**07300**	63,49	**07300**	53,36	**07300**	63,49	**07300**
7,5	21,0	7,2	40,0	44	80	8	2	51,93	**07800**	62,07	**07800**	51,93	**07800**	62,07	**07800**
8,0	21,0	7,7	40,0	44	80	8	2	49,56	**08300**	60,91	**08300**	49,56	**08300**	60,91	**08300**
8,5	26,0	8,2	50,0	54	94	10	2	84,36	**08800**	95,72	**08800**	84,36	**08800**	95,72	**08800**
9,0	26,0	8,7	50,0	54	94	10	2	78,90	**09300**	90,24	**09300**	78,90	**09300**	90,24	**09300**
9,5	26,0	9,2	50,0	54	94	10	2	76,66	**09800**	88,03	**09800**	76,66	**09800**	88,03	**09800**
10,0	26,0	9,7	50,0	54	94	10	2	73,12	**10300**	85,77	**10300**	73,12	**10300**	85,77	**10300**
10,5	31,0	10,1	60,0	64	109	12	2	112,00	**10800**	124,70	**10800**	112,00	**10800**	124,70	**10800**
11,0	31,0	10,6	60,0	64	109	12	2	113,50	**11300**	126,20	**11300**	113,50	**11300**	126,20	**11300**
11,5	31,0	11,1	60,0	64	109	12	2	105,70	**11800**	118,30	**11800**	105,70	**11800**	118,30	**11800**
12,0	31,0	11,6	60,0	64	109	12	2	103,80	**12300**	121,40	**12300**	103,80	**12300**	121,40	**12300**
12,5	36,0	12,1	70,0	74	119	14	2					162,00	**12800**	179,60	**12800**
13,0	36,0	12,6	70,0	74	119	14	2					160,50	**13300**	178,20	**13300**
13,5	36,0	13,1	70,0	74	119	14	2					159,40	**13800**	176,90	**13800**
14,0	36,0	13,6	70,0	74	119	14	2					160,70	**14300**	184,40	**14300**
14,5	41,0	14,0	80,0	84	132	16	2					219,80	**14800**	243,60	**14800**
15,0	41,0	14,5	80,0	84	132	16	2					214,90	**15300**	238,70	**15300**
15,5	41,0	15,0	80,0	84	132	16	2					209,80	**15800**	233,50	**15800**
16,0	41,0	15,5	80,0	84	132	16	2					220,80	**16300**	248,60	**16300**
16,5	47,0	16,0	90,0	94	142	18	2					285,50	**16800**	313,30	**16800**
17,0	47,0	16,5	90,0	94	142	18	2					277,60	**17300**	305,40	**17300**
17,5	47,0	17,0	90,0	94	142	18	2					269,60	**17800**	297,30	**17800**
18,0	47,0	17,5	90,0	94	142	18	2					266,20	**18300**	296,70	**18300**
18,5	52,0	18,0	100,0	104	154	20	2					353,00	**18800**	383,40	**18800**
19,0	52,0	18,5	100,0	104	154	20	2					343,40	**19300**	373,60	**19300**
19,5	52,0	19,0	100,0	104	154	20	2					333,50	**19800**	363,50	**19800**
20,0	52,0	19,5	100,0	104	154	20	2					327,50	**20300**	365,40	**20300**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes



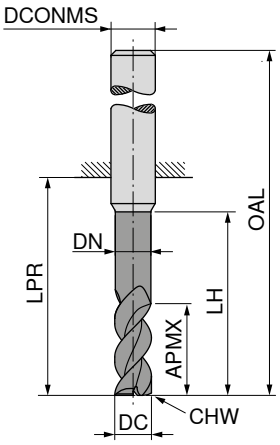

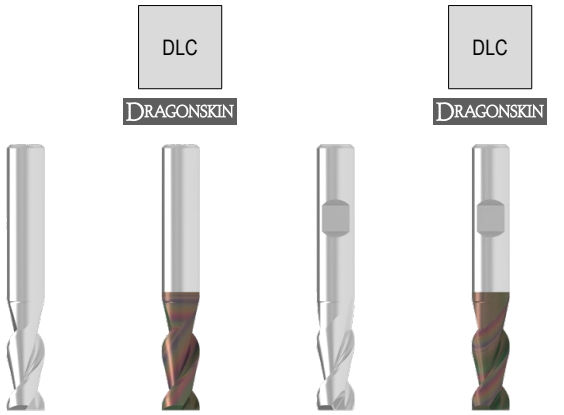

Factory standard | Factory standard | Factory standard | Factory standard

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 619 ... EUR V1/5B		53 621 ... EUR V1/5B		53 620 ... EUR V1/5B		53 622 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm	mm									
5,0	10,5	4,8	15	22	58	6	0,1	2	33,93	05100	42,63	05100	33,93	05100	42,63	05100
5,5	13,0	5,3	18	22	58	6	0,1	2	41,38	05600	50,11	05600	41,38	05600	50,11	05600
6,0	13,0	5,8	18	22	58	6	0,1	2	38,12	06100	48,21	06100	38,12	06100	48,21	06100
6,5	17,0	6,2	24	28	64	8	0,1	2	43,76	06600	53,89	06600	43,76	06600	53,89	06600
7,0	17,0	6,7	24	28	64	8	0,1	2	42,68	07100	52,82	07100	42,68	07100	52,82	07100
7,5	17,0	7,2	24	28	64	8	0,1	2	41,53	07600	51,62	07600	41,53	07600	51,62	07600
8,0	17,0	7,7	24	28	64	8	0,1	2	39,65	08100	51,01	08100	39,65	08100	51,01	08100
8,5	21,0	8,2	30	34	74	10	0,1	2	67,52	08600	78,87	08600	67,52	08600	78,87	08600
9,0	21,0	8,7	30	34	74	10	0,1	2	65,72	09100	77,09	09100	65,72	09100	77,09	09100
9,5	21,0	9,2	30	34	74	10	0,1	2	63,90	09600	75,25	09600	63,90	09600	75,25	09600
10,0	21,0	9,7	30	34	74	10	0,1	2	60,93	10100	73,57	10100	60,93	10100	73,57	10100
10,5	25,0	10,1	36	40	85	12	0,1	2	93,33	10600	106,00	10600	93,33	10600	106,00	10600
11,0	25,0	10,6	36	40	85	12	0,1	2	90,79	11100	103,40	11100	90,79	11100	103,40	11100
11,5	25,0	11,1	36	40	85	12	0,1	2	88,08	11600	100,70	11600	88,08	11600	100,70	11600
12,0	25,0	11,6	36	40	85	12	0,1	2	86,46	12100	104,10	12100	86,46	12100	104,10	12100
12,5	29,0	12,1	42	46	91	14	0,1	2					124,50	12600	142,20	12600
13,0	29,0	12,6	42	46	91	14	0,1	2					123,40	13100	141,20	13100
13,5	29,0	13,1	42	46	91	14	0,1	2					122,40	13600	140,10	13600
14,0	29,0	13,6	42	46	91	14	0,1	2					123,60	14100	147,30	14100
14,5	33,0	14,0	48	52	100	16	0,1	2					169,00	14600	192,80	14600
15,0	33,0	14,5	48	52	100	16	0,1	2					165,20	15100	189,00	15100
15,5	33,0	15,0	48	52	100	16	0,1	2					161,20	15600	185,00	15600
16,0	33,0	15,5	48	52	100	16	0,1	2					169,90	16100	197,50	16100
16,5	38,0	16,0	54	58	106	18	0,1	2					219,60	16600	247,30	16600
17,0	38,0	16,5	54	58	106	18	0,1	2					213,70	17100	241,50	17100
17,5	38,0	17,0	54	58	106	18	0,1	2					207,40	17600	235,20	17600
18,0	38,0	17,5	54	58	106	18	0,1	2					204,80	18100	235,20	18100
18,5	42,0	18,0	60	64	114	20	0,1	2					271,50	18600	301,90	18600
19,0	42,0	18,5	60	64	114	20	0,1	2					264,10	19100	294,40	19100
19,5	42,0	19,0	60	64	114	20	0,1	2					256,50	19600	286,80	19600
20,0	42,0	19,5	60	64	114	20	0,1	2					252,00	20100	289,90	20100

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





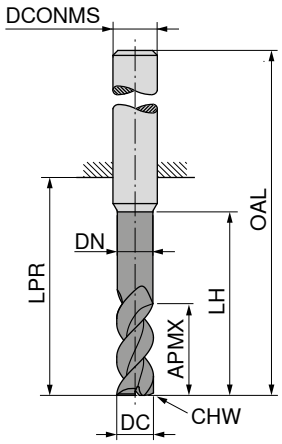

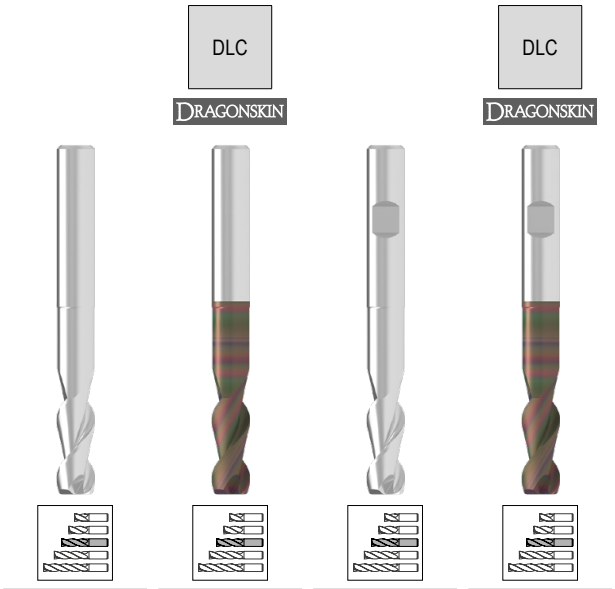

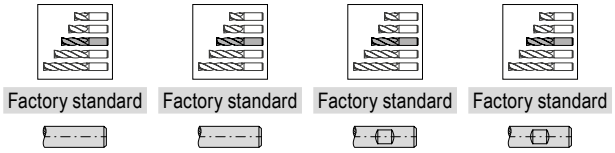

Factory standard | Factory standard | Factory standard | Factory standard

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 629 ... EUR V1/5B		53 631 ... EUR V1/5B		53 630 ... EUR V1/5B		53 632 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm	mm									
2,0	5,5	1,8	10,0	19	55	6	0,05	2	30,44	**02300**	39,14	**02300**	30,44	**02300**	39,14	**02300**
2,5	6,5	2,3	12,5	22	58	6	0,05	2	38,96	**02800**	47,67	**02800**	38,96	**02800**	47,67	**02800**
3,0	8,0	2,8	15,0	22	58	6	0,10	2	39,98	**03300**	48,66	**03300**	39,98	**03300**	48,66	**03300**
3,5	10,5	3,3	20,0	26	62	6	0,10	2	37,66	**03800**	46,40	**03800**	37,66	**03800**	46,40	**03800**
4,0	10,5	3,8	20,0	26	62	6	0,10	2	38,48	**04300**	47,19	**04300**	38,48	**04300**	47,19	**04300**
4,5	13,0	4,3	25,0	34	70	6	0,10	2	39,76	**04800**	48,47	**04800**	39,76	**04800**	48,47	**04800**
5,0	13,0	4,8	25,0	34	70	6	0,10	2	40,72	**05300**	49,43	**05300**	40,72	**05300**	49,43	**05300**
5,5	16,0	5,3	30,0	34	70	6	0,10	2	49,65	**05800**	58,38	**05800**	49,65	**05800**	58,38	**05800**
6,0	16,0	5,8	30,0	34	70	6	0,10	2	40,72	**06300**	50,83	**06300**	40,72	**06300**	50,83	**06300**
6,5	21,0	6,2	40,0	44	80	8	0,10	2	54,73	**06800**	64,83	**06800**	54,73	**06800**	64,83	**06800**
7,0	21,0	6,7	40,0	44	80	8	0,10	2	53,36	**07300**	63,49	**07300**	53,36	**07300**	63,49	**07300**
7,5	21,0	7,2	40,0	44	80	8	0,10	2	51,93	**07800**	62,07	**07800**	51,93	**07800**	62,07	**07800**
8,0	21,0	7,7	40,0	44	80	8	0,10	2	49,56	**08300**	60,91	**08300**	49,56	**08300**	60,91	**08300**
8,5	26,0	8,2	50,0	54	94	10	0,10	2	84,36	**08800**	95,72	**08800**	84,36	**08800**	95,72	**08800**
9,0	26,0	8,7	50,0	54	94	10	0,10	2	78,90	**09300**	90,24	**09300**	78,90	**09300**	90,24	**09300**
9,5	26,0	9,2	50,0	54	94	10	0,10	2	76,66	**09800**	88,03	**09800**	76,66	**09800**	88,03	**09800**
10,0	26,0	9,7	50,0	54	94	10	0,10	2	73,12	**10300**	85,77	**10300**	73,12	**10300**	85,77	**10300**
10,5	31,0	10,1	60,0	64	109	12	0,10	2	112,00	**10800**	124,70	**10800**	112,00	**10800**	124,70	**10800**
11,0	31,0	10,6	60,0	64	109	12	0,10	2	113,50	**11300**	126,20	**11300**	113,50	**11300**	126,20	**11300**
11,5	31,0	11,1	60,0	64	109	12	0,10	2	105,70	**11800**	118,30	**11800**	105,70	**11800**	118,30	**11800**
12,0	31,0	11,6	60,0	64	109	12	0,10	2	103,80	**12300**	121,40	**12300**	103,80	**12300**	121,40	**12300**
12,5	36,0	12,1	70,0	74	119	14	0,10	2					162,00	**12800**	179,60	**12800**
13,0	36,0	12,6	70,0	74	119	14	0,10	2					160,50	**13300**	178,20	**13300**
13,5	36,0	13,1	70,0	74	119	14	0,10	2					159,40	**13800**	176,90	**13800**
14,0	36,0	13,6	70,0	74	119	14	0,10	2					160,70	**14300**	184,40	**14300**
14,5	41,0	14,0	80,0	84	132	16	0,10	2					219,80	**14800**	243,60	**14800**
15,0	41,0	14,5	80,0	84	132	16	0,10	2					214,90	**15300**	238,70	**15300**
15,5	41,0	15,0	80,0	84	132	16	0,10	2					209,80	**15800**	233,50	**15800**
16,0	41,0	15,5	80,0	84	132	16	0,10	2					220,80	**16300**	248,60	**16300**
16,5	47,0	16,0	90,0	94	142	18	0,10	2					285,50	**16800**	313,30	**16800**
17,0	47,0	16,5	90,0	94	142	18	0,10	2					277,60	**17300**	305,40	**17300**
17,5	47,0	17,0	90,0	94	142	18	0,10	2					269,60	**17800**	297,30	**17800**
18,0	47,0	17,5	90,0	94	142	18	0,10	2					266,20	**18300**	296,70	**18300**
18,5	52,0	18,0	100,0	104	154	20	0,10	2					353,00	**18800**	383,40	**18800**
19,0	52,0	18,5	100,0	104	154	20	0,10	2					343,40	**19300**	373,60	**19300**
19,5	52,0	19,0	100,0	104	154	20	0,10	2					333,50	**19800**	363,50	**19800**
20,0	52,0	19,5	100,0	104	154	20	0,10	2					327,50	**20300**	365,40	**20300**
P																
M																
K																
N									●		●		●		●	
S																
H																
O																

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals



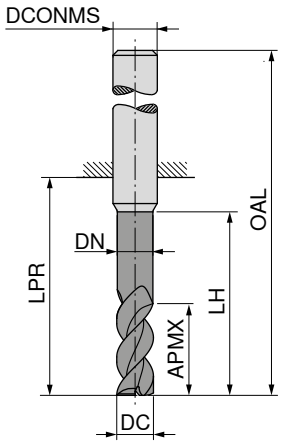

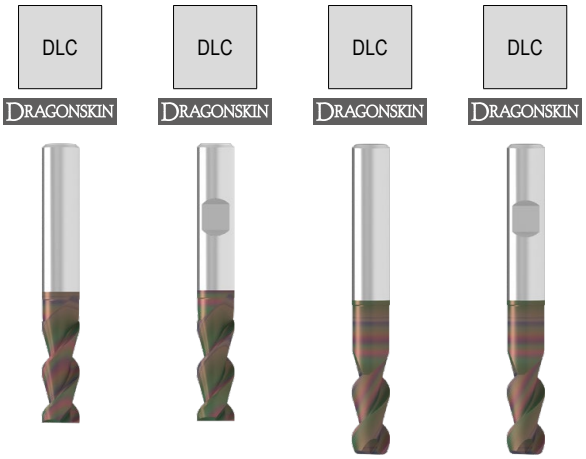

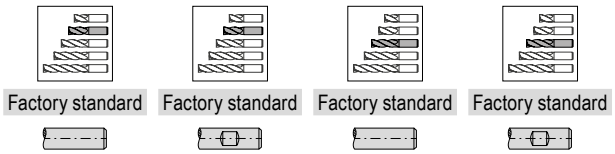

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	53 627 ...		53 628 ...		53 637 ...		53 638 ...	
mm	mm	mm	mm	mm	mm	mm		EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B	
2,0	5,5	1,8	10,0	19	55	6	2					41,11	**02300**	41,11	**02300**
2,5	6,5	2,3	12,5	22	58	6	2					49,63	**02800**	49,63	**02800**
3,0	8,0	2,8	15,0	22	58	6	2					50,66	**03300**	50,66	**03300**
3,5	10,5	3,3	20,0	26	62	6	2					48,38	**03800**	48,38	**03800**
4,0	10,5	3,8	20,0	26	62	6	2					49,15	**04300**	49,15	**04300**
4,5	13,0	4,3	25,0	34	70	6	2					50,44	**04800**	50,44	**04800**
5,0	10,5	4,8	15,0	22	58	6	2	51,30	**05100**	51,30	**05100**				
5,0	13,0	4,8	25,0	34	70	6	2					48,96	**05300**	48,96	**05300**
5,5	13,0	5,3	18,0	22	58	6	2	52,05	**05600**	52,05	**05600**				
5,5	16,0	5,3	30,0	34	70	6	2					49,68	**05800**	49,68	**05800**
6,0	13,0	5,8	18,0	22	58	6	2	48,79	**06100**	48,79	**06100**				
6,0	16,0	5,8	30,0	34	70	6	2					45,92	**06300**	45,92	**06300**
6,5	17,0	6,2	24,0	28	64	8	2	56,61	**06600**	56,61	**06600**				
6,5	21,0	6,2	40,0	44	80	8	2					69,71	**06800**	69,71	**06800**
7,0	17,0	6,7	24,0	28	64	8	2	55,53	**07100**	55,53	**07100**				
7,0	21,0	6,7	40,0	44	80	8	2					67,96	**07300**	67,96	**07300**
7,5	17,0	7,2	24,0	28	64	8	2	54,36	**07600**	54,36	**07600**				
7,5	21,0	7,2	40,0	44	80	8	2					65,97	**07800**	65,97	**07800**
8,0	17,0	7,7	24,0	28	64	8	2	52,50	**08100**	52,50	**08100**				
8,0	21,0	7,7	40,0	44	80	8	2					62,98	**08300**	62,98	**08300**
8,5	21,0	8,2	30,0	34	74	10	2	82,45	**08600**	82,45	**08600**				
8,5	26,0	8,2	50,0	54	94	10	2					96,79	**08800**	96,79	**08800**
9,0	21,0	8,7	30,0	34	74	10	2	80,68	**09100**	80,68	**09100**				
9,0	26,0	8,7	50,0	54	94	10	2					93,89	**09300**	93,89	**09300**
9,5	21,0	9,2	30,0	34	74	10	2	78,87	**09600**	78,87	**09600**				
9,5	26,0	9,2	50,0	54	94	10	2					90,83	**09800**	90,83	**09800**
10,0	21,0	9,7	30,0	34	74	10	2	75,88	**10100**	75,88	**10100**				
10,0	26,0	9,7	50,0	54	94	10	2					86,58	**10300**	86,58	**10300**
10,5	25,0	10,1	36,0	40	85	12	2	110,40	**10600**	110,40	**10600**				
10,5	31,0	10,1	60,0	64	109	12	2					131,80	**10800**	131,80	**10800**
11,0	25,0	10,6	36,0	40	85	12	2	107,90	**11100**	107,90	**11100**				
11,0	31,0	10,6	60,0	64	109	12	2					127,60	**11300**	127,60	**11300**
11,5	25,0	11,1	36,0	40	85	12	2	105,20	**11600**	105,20	**11600**				
11,5	31,0	11,1	60,0	64	109	12	2					123,00	**11800**	123,00	**11800**
12,0	25,0	11,6	36,0	40	85	12	2	103,60	**12100**	103,60	**12100**				
12,0	31,0	11,6	60,0	64	109	12	2					119,90	**12300**	119,90	**12300**
12,5	29,0	12,1	42,0	46	91	14	2			142,60	**12600**				
12,5	36,0	12,1	70,0	74	119	14	2							175,00	**12800**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

Continued on next page

AluLine – End milling cutter

The specialist for machining non-ferrous metals



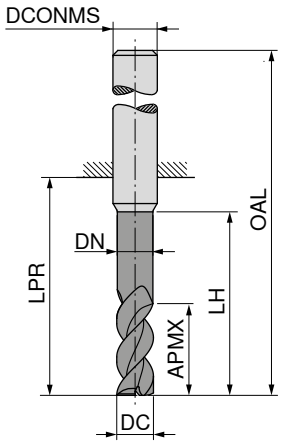

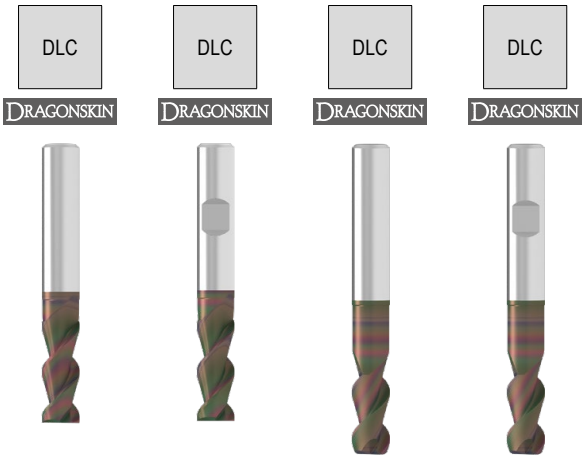

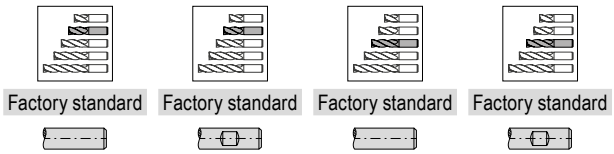

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	53 627 ...		53 628 ...		53 637 ...		53 638 ...	
mm	mm	mm	mm	mm	mm	mm		EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B	
13,0	29,0	12,6	42,0	46	91	14	2			139,00	**13100**				
13,0	36,0	12,6	70,0	74	119	14	2							168,90	**13300**
13,5	29,0	13,1	42,0	46	91	14	2			135,30	**13600**				
13,5	36,0	13,1	70,0	74	119	14	2							162,80	**13800**
14,0	29,0	13,6	42,0	46	91	14	2			134,40	**14100**				
14,0	36,0	13,6	70,0	74	119	14	2							160,10	**14300**
14,5	33,0	14,0	48,0	52	100	16	2			185,00	**14600**				
14,5	41,0	14,0	80,0	84	132	16	2							234,70	**14800**
15,0	33,0	14,5	48,0	52	100	16	2			180,50	**15100**				
15,0	41,0	14,5	80,0	84	132	16	2							226,70	**15300**
15,5	33,0	15,0	48,0	52	100	16	2			175,50	**15600**				
15,5	41,0	15,0	80,0	84	132	16	2							218,70	**15800**
16,0	33,0	15,5	48,0	52	100	16	2			180,50	**16100**				
16,0	41,0	15,5	80,0	84	132	16	2							222,20	**16300**
16,5	38,0	16,0	54,0	58	106	18	2			245,20	**16600**				
16,5	47,0	16,0	90,0	94	142	18	2							264,50	**16800**
17,0	38,0	16,5	54,0	58	106	18	2			239,20	**17100**				
17,0	47,0	16,5	90,0	94	142	18	2							254,50	**17300**
17,5	38,0	17,0	54,0	58	106	18	2			233,10	**17600**				
17,5	47,0	17,0	90,0	94	142	18	2							244,10	**17800**
18,0	38,0	17,5	54,0	58	106	18	2			230,40	**18100**				
18,0	47,0	17,5	90,0	94	142	18	2							237,60	**18300**
18,5	42,0	18,0	60,0	64	114	20	2			303,70	**18600**				
18,5	52,0	18,0	100,0	104	154	20	2							395,70	**18800**
19,0	42,0	18,5	60,0	64	114	20	2			296,20	**19100**				
19,0	52,0	18,5	100,0	104	154	20	2							383,20	**19300**
19,5	42,0	19,0	60,0	64	114	20	2			288,40	**19600**				
19,5	52,0	19,0	100,0	104	154	20	2							370,30	**19800**
20,0	42,0	19,5	60,0	64	114	20	2			283,90	**20100**				
20,0	52,0	19,5	100,0	104	154	20	2							361,10	**20300**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





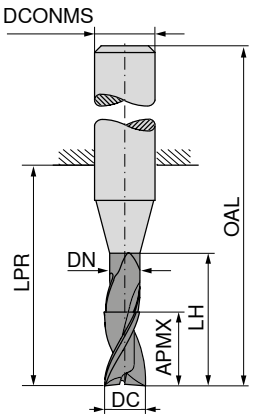

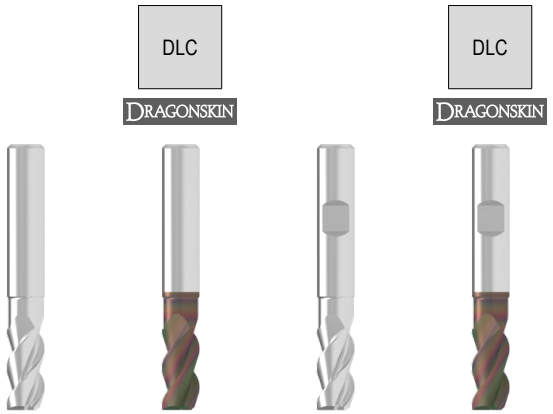

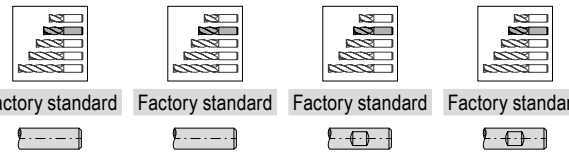

								53 615 ...		53 617 ...		53 616 ...		53 618 ...	
								Factory standard		Factory standard		Factory standard		Factory standard	
								EUR		EUR		EUR		EUR	
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	V1/5B		V1/5B		V1/5B		V1/5B	
mm	mm	mm	mm	mm	mm	mm									
2,0	4,5	1,8	6,0	14	50	6	3	31,03	02100	39,69	02100	31,03	02100	39,69	02100
2,5	5,5	2,3	7,5	19	55	6	3	30,63	02600	39,32	02600	30,63	02600	39,32	02600
3,0	6,5	2,8	9,0	19	55	6	3	31,42	03100	40,09	03100	31,42	03100	40,09	03100
3,5	8,5	3,3	12,0	19	55	6	3	33,02	03600	41,73	03600	33,02	03600	41,73	03600
4,0	8,5	3,8	12,0	19	55	6	3	33,38	04100	42,06	04100	33,38	04100	42,06	04100
4,5	10,5	4,3	15,0	22	58	6	3	42,40	04600	51,09	04600	42,40	04600	51,09	04600
5,0	10,5	4,8	15,0	22	58	6	3	37,25	05100	45,98	05100	37,25	05100	45,98	05100
5,5	13,0	5,3	18,0	22	58	6	3	43,44	05600	52,14	05600	43,44	05600	52,14	05600
6,0	13,0	5,8	18,0	22	58	6	3	38,05	06100	48,18	06100	38,05	06100	48,18	06100
6,5	17,0	6,2	24,0	28	64	8	3	45,98	06600	56,07	06600	45,98	06600	56,07	06600
7,0	17,0	6,7	24,0	28	64	8	3	44,85	07100	54,97	07100	44,85	07100	54,97	07100
7,5	17,0	7,2	24,0	28	64	8	3	43,64	07600	53,73	07600	43,64	07600	53,73	07600
8,0	17,0	7,7	24,0	28	64	8	3	41,63	08100	53,00	08100	41,63	08100	53,00	08100
8,5	21,0	8,2	30,0	34	74	10	3	70,86	08600	82,25	08600	70,86	08600	82,25	08600
9,0	21,0	8,7	30,0	34	74	10	3	69,02	09100	80,37	09100	69,02	09100	80,37	09100
9,5	21,0	9,2	30,0	34	74	10	3	67,08	09600	78,47	09600	67,08	09600	78,47	09600
10,0	21,0	9,7	30,0	34	74	10	3	63,98	10100	76,62	10100	63,98	10100	76,62	10100
10,5	25,0	10,1	36,0	40	85	12	3	98,02	10600	110,70	10600	98,02	10600	110,70	10600
11,0	25,0	10,6	36,0	40	85	12	3	95,32	11100	108,00	11100	95,32	11100	108,00	11100
11,5	25,0	11,1	36,0	40	85	12	3	92,51	11600	105,20	11600	92,51	11600	105,20	11600
12,0	25,0	11,6	36,0	40	85	12	3	90,79	12100	108,40	12100	90,79	12100	108,40	12100
12,5	29,0	12,1	42,0	46	91	14	3					124,50	12600	142,20	12600
13,0	29,0	12,6	42,0	46	91	14	3					123,40	13100	141,20	13100
13,5	29,0	13,1	42,0	46	91	14	3					122,40	13600	140,10	13600
14,0	29,0	13,6	42,0	46	91	14	3					123,60	14100	147,30	14100
14,5	33,0	14,0	48,0	52	100	16	3					169,00	14600	192,80	14600
15,0	33,0	14,5	48,0	52	100	16	3					165,20	15100	189,00	15100
15,5	33,0	15,0	48,0	52	100	16	3					161,20	15600	185,00	15600
16,0	33,0	15,5	48,0	52	100	16	3					169,90	16100	197,50	16100
16,5	38,0	16,0	54,0	58	106	18	3					219,60	16600	247,30	16600
17,0	38,0	16,5	54,0	58	106	18	3					213,70	17100	241,50	17100
17,5	38,0	17,0	54,0	58	106	18	3					207,40	17600	235,20	17600
18,0	38,0	17,5	54,0	58	106	18	3					204,80	18100	235,20	18100
18,5	42,0	18,0	60,0	64	114	20	3					271,50	18600	301,90	18600
19,0	42,0	18,5	60,0	64	114	20	3					264,10	19100	294,40	19100
19,5	42,0	19,0	60,0	64	114	20	3					256,50	19600	286,80	19600
20,0	42,0	19,5	60,0	64	114	20	3					252,00	20100	289,90	20100

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

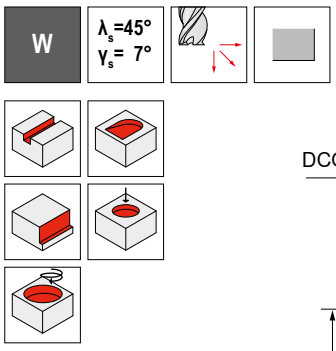

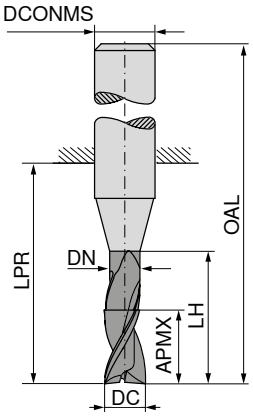

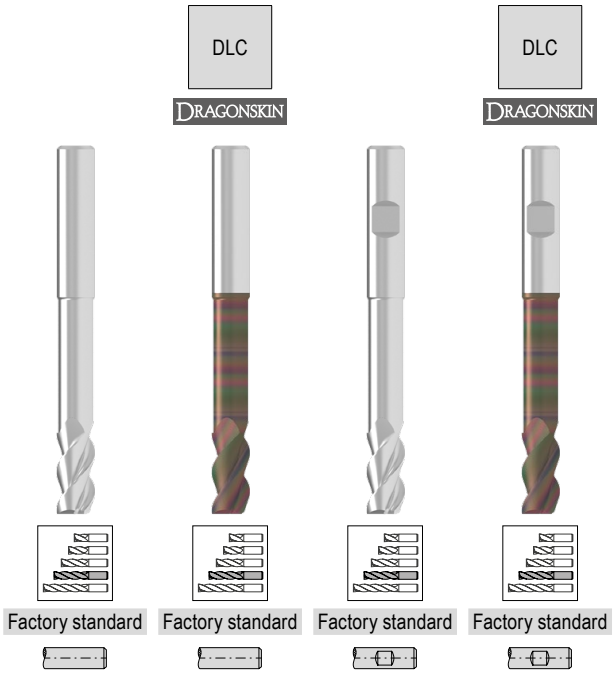

								Factory standard		Factory standard		Factory standard		Factory standard	
								53 615 ...		**53 617 ...**		**53 616 ...**		**53 618 ...**	
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm									
2,0	5,5	1,8	10,0	19	55	6	3	37,20	**02200**	45,90	**02200**	37,20	**02200**	45,90	**02200**
2,5	6,5	2,3	12,5	22	58	6	3	36,71	**02700**	45,42	**02700**	36,71	**02700**	45,42	**02700**
3,0	8,0	2,8	15,0	22	58	6	3	37,66	**03200**	46,40	**03200**	37,66	**03200**	46,40	**03200**
3,5	10,5	3,3	20,0	26	62	6	3	39,63	**03700**	48,32	**03700**	39,63	**03700**	48,32	**03700**
4,0	10,5	3,8	20,0	26	62	6	3	40,05	**04200**	48,79	**04200**	40,05	**04200**	48,79	**04200**
4,5	13,0	4,3	25,0	34	70	6	3	50,89	**04700**	59,60	**04700**	50,89	**04700**	59,60	**04700**
5,0	13,0	4,8	25,0	34	70	6	3	44,71	**05200**	53,38	**05200**	44,71	**05200**	53,38	**05200**
5,5	16,0	5,3	30,0	34	70	6	3	52,14	**05700**	60,86	**05700**	52,14	**05700**	60,86	**05700**
6,0	16,0	5,8	30,0	34	70	6	3	45,69	**06200**	55,78	**06200**	45,69	**06200**	55,78	**06200**
6,5	21,0	6,2	40,0	44	80	8	3	55,15	**06700**	65,26	**06700**	55,15	**06700**	65,26	**06700**
7,0	21,0	6,7	40,0	44	80	8	3	53,78	**07200**	63,90	**07200**	53,78	**07200**	63,90	**07200**
7,5	21,0	7,2	40,0	44	80	8	3	52,35	**07700**	62,46	**07700**	52,35	**07700**	62,46	**07700**
8,0	21,0	7,7	40,0	44	80	8	3	49,97	**08200**	61,36	**08200**	49,97	**08200**	61,36	**08200**
8,5	26,0	8,2	50,0	54	94	10	3	85,01	**08700**	96,36	**08700**	85,01	**08700**	96,36	**08700**
9,0	26,0	8,7	50,0	54	94	10	3	82,83	**09200**	94,21	**09200**	82,83	**09200**	94,21	**09200**
9,5	26,0	9,2	50,0	54	94	10	3	80,50	**09700**	91,88	**09700**	80,50	**09700**	91,88	**09700**
10,0	26,0	9,7	50,0	54	94	10	3	76,79	**10200**	89,44	**10200**	76,79	**10200**	89,44	**10200**
10,5	31,0	10,1	60,0	64	109	12	3	117,60	**10700**	130,30	**10700**	117,60	**10700**	130,30	**10700**
11,0	31,0	10,6	60,0	64	109	12	3	114,40	**11200**	127,10	**11200**	114,40	**11200**	127,10	**11200**
11,5	31,0	11,1	60,0	64	109	12	3	111,00	**11700**	123,70	**11700**	111,00	**11700**	123,70	**11700**
12,0	31,0	11,6	60,0	64	109	12	3	108,90	**12200**	126,70	**12200**	108,90	**12200**	126,70	**12200**
12,5	36,0	12,1	70,0	74	119	14	3					149,50	**12700**	167,20	**12700**
13,0	36,0	12,6	70,0	74	119	14	3					148,10	**13200**	165,90	**13200**
13,5	36,0	13,1	70,0	74	119	14	3					147,00	**13700**	164,60	**13700**
14,0	36,0	13,6	70,0	74	119	14	3					148,20	**14200**	172,10	**14200**
14,5	41,0	14,0	80,0	84	132	16	3					202,80	**14700**	226,60	**14700**
15,0	41,0	14,5	80,0	84	132	16	3					198,40	**15200**	222,20	**15200**
15,5	41,0	15,0	80,0	84	132	16	3					193,60	**15700**	217,40	**15700**
16,0	41,0	15,5	80,0	84	132	16	3					203,90	**16200**	231,60	**16200**
16,5	47,0	16,0	90,0	94	142	18	3					263,50	**16700**	291,30	**16700**
17,0	47,0	16,5	90,0	94	142	18	3					256,40	**17200**	284,00	**17200**
17,5	47,0	17,0	90,0	94	142	18	3					249,00	**17700**	276,60	**17700**
18,0	47,0	17,5	90,0	94	142	18	3					245,80	**18200**	276,10	**18200**
18,5	52,0	18,0	100,0	104	154	20	3					353,00	**18700**	383,40	**18700**
19,0	52,0	18,5	100,0	104	154	20	3					343,40	**19200**	373,60	**19200**
19,5	52,0	19,0	100,0	104	154	20	3					333,50	**19700**	363,50	**19700**
20,0	52,0	19,5	100,0	104	154	20	3					327,50	**20200**	365,40	**20200**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

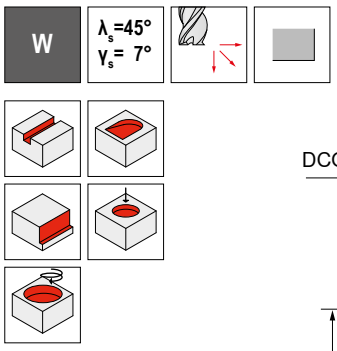

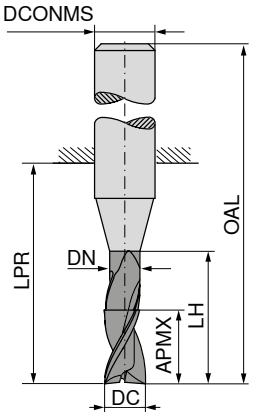

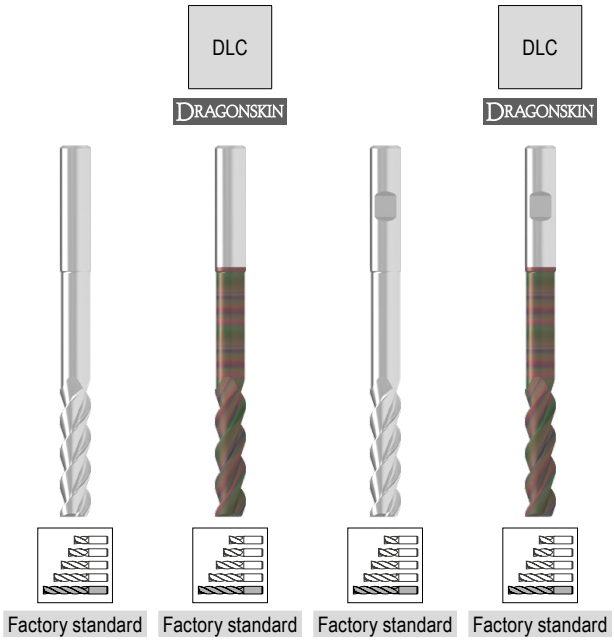

								Factory standard	Factory standard	Factory standard	Factory standard
								53 615 ...	53 617 ...	53 616 ...	53 618 ...
DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR V1/5B	EUR V1/5B	EUR V1/5B	EUR V1/5B
mm	mm	mm	mm	mm	mm	mm					
2,0	8,5	1,8	16	26	62	6	3	49,61 02400	58,33 02400	49,61 02400	58,33 02400
2,5	10,5	2,3	20	31	67	6	3	48,96 02900	57,67 02900	48,96 02900	57,67 02900
3,0	12,5	2,8	24	31	67	6	3	50,26 03400	58,98 03400	50,26 03400	58,98 03400
3,5	16,5	3,3	32	38	74	6	3	52,84 03900	61,53 03900	52,84 03900	61,53 03900
4,0	16,5	3,8	32	38	74	6	3	53,38 04400	62,12 04400	53,38 04400	62,12 04400
4,5	20,5	4,3	40	52	88	6	3	67,85 04900	76,55 04900	67,85 04900	76,55 04900
5,0	20,5	4,8	40	52	88	6	3	59,65 05400	68,32 05400	59,65 05400	68,32 05400
5,5	25,0	5,3	48	52	88	6	3	69,50 05900	78,24 05900	69,50 05900	78,24 05900
6,0	25,0	5,8	48	52	88	6	3	60,91 06400	71,03 06400	60,91 06400	71,03 06400
6,5	33,0	6,2	64	68	104	8	3	73,55 06900	83,66 06900	73,55 06900	83,66 06900
7,0	33,0	6,7	64	68	104	8	3	71,75 07400	81,86 07400	71,75 07400	81,86 07400
7,5	33,0	7,2	64	68	104	8	3	69,79 07900	79,91 07900	69,79 07900	79,91 07900
8,0	33,0	7,7	64	68	104	8	3	66,60 08400	77,97 08400	66,60 08400	77,97 08400
8,5	41,0	8,2	80	84	124	10	3	113,40 08900	124,70 08900	113,40 08900	124,70 08900
9,0	41,0	8,7	80	84	124	10	3	110,40 09400	121,80 09400	110,40 09400	121,80 09400
9,5	41,0	9,2	80	84	124	10	3	107,30 09900	118,70 09900	107,30 09900	118,70 09900
10,0	41,0	9,7	80	84	124	10	3	102,40 10400	115,00 10400	102,40 10400	115,00 10400
10,5	49,0	10,1	96	100	145	12	3	156,80 10900	169,60 10900	156,80 10900	169,60 10900
11,0	49,0	10,6	96	100	145	12	3	152,60 11400	165,10 11400	152,60 11400	165,10 11400
11,5	49,0	11,1	96	100	145	12	3	148,00 11900	160,60 11900	148,00 11900	160,60 11900
12,0	49,0	11,6	96	100	145	12	3	145,30 12400	163,00 12400	145,30 12400	163,00 12400
12,5	57,0	12,1	112	116	161	14	3			236,60 12900	254,20 12900
13,0	57,0	12,6	112	116	161	14	3			234,60 13400	252,20 13400
13,5	57,0	13,1	112	116	161	14	3			232,70 13900	250,20 13900
14,0	57,0	13,6	112	116	161	14	3			234,80 14400	258,60 14400
14,5	65,0	14,0	128	132	180	16	3			321,20 14900	345,00 14900
15,0	65,0	14,5	128	132	180	16	3			314,20 15400	338,00 15400
15,5	65,0	15,0	128	132	180	16	3			306,70 15900	330,30 15900
16,0	65,0	15,5	128	132	180	16	3			322,60 16400	350,50 16400
16,5	74,0	16,0	144	148	196	18	3			417,20 16900	444,90 16900
17,0	74,0	16,5	144	148	196	18	3			405,80 17400	433,60 17400
17,5	74,0	17,0	144	148	196	18	3			394,10 17900	421,80 17900
18,0	74,0	17,5	144	148	196	18	3			389,20 18400	419,40 18400
18,5	82,0	18,0	160	164	214	20	3			516,00 18900	546,40 18900
19,0	82,0	18,5	160	164	214	20	3			501,80 19400	532,20 19400
19,5	82,0	19,0	160	164	214	20	3			487,20 19900	517,50 19900
20,0	82,0	19,5	160	164	214	20	3			478,50 20400	516,60 20400
P											
M											
K											
N								●	●	●	●
S											
H											
O											

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





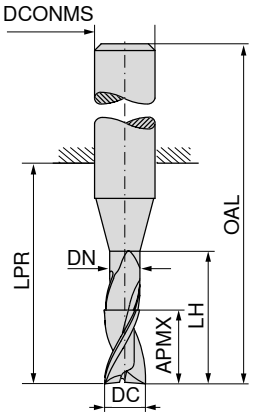



Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	53 517 ... EUR V1/5B		53 518 ... EUR V1/5B		53 519 ... EUR V1/5B		53 520 ... EUR V1/5B	
3	8	2,7	13	21	57	6	3							35,92	030
4	11	3,7	17	21	57	6	3							39,41	040
5	13	4,7	19	21	57	6	3					38,97	050		
6	13	5,7	19	21	57	6	3					36,51	060		
6	18	5,7	24	26	62	6	3							39,54	060
8	21	7,4	25	27	63	8	3			51,27	080				
8	24	7,4	30	32	68	8	3					58,38	080		
10	22	9,2	30	32	72	10	3			71,13	100				
10	30	9,2	38	40	80	10	3					77,06	100		
12	26	11,0	36	38	83	12	3			110,70	120				
12	36	11,0	46	48	93	12	3					119,80	120		
14	26	13,0	36	38	83	14	3	141,50	140						
16	36	15,0	42	44	92	16	3	197,00	160						
16	48	15,0	58	60	108	16	3					215,80	160		
18	36	17,0	42	44	92	18	3	239,00	180						
20	41	19,0	52	54	104	20	3	282,60	200						
20	60	19,0	74	76	126	20	3					404,20	200		

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

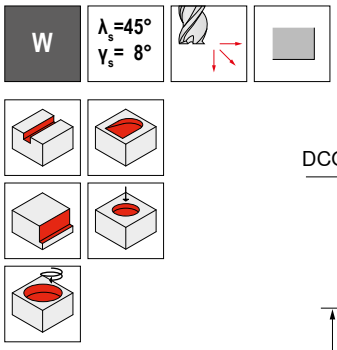

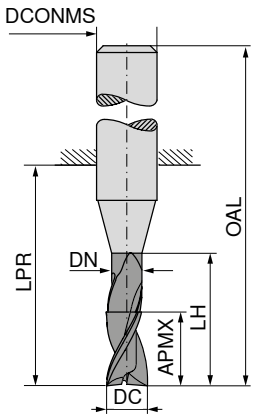

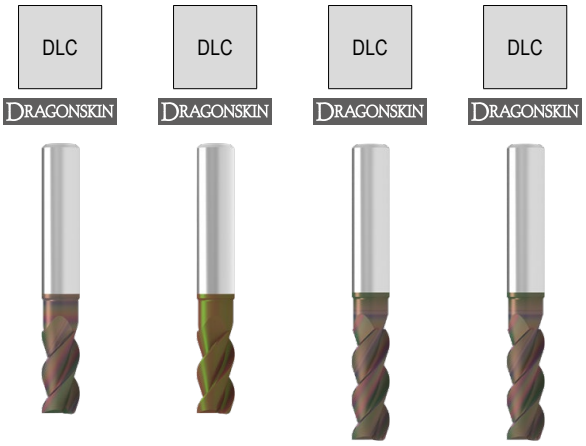

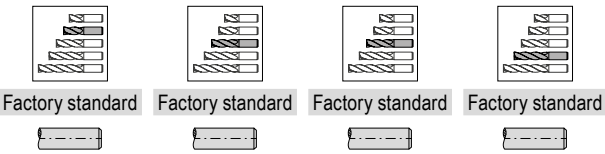

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	53 521 ... EUR V1/5B		53 522 ... EUR V1/5B		53 523 ... EUR V1/5B		53 524 ... EUR V1/5B	
3	8	2,7	13	21	57	6	3							48,83	**030**
4	11	3,7	17	21	57	6	3							52,30	**040**
5	13	4,7	19	21	57	6	3					51,73	**050**		
6	13	5,7	19	21	57	6	3					49,40	**060**		
6	18	5,7	24	26	62	6	3							52,46	**060**
8	21	7,4	25	27	63	8	3			64,02	**080**				
8	24	7,4	30	32	68	8	3					71,13	**080**		
10	22	9,2	30	32	72	10	3			83,87	**100**				
10	30	9,2	38	40	80	10	3					89,95	**100**		
12	26	11,0	36	38	83	12	3			123,40	**120**				
12	36	11,0	46	48	93	12	3					132,70	**120**		
14	26	13,0	36	38	83	14	3	155,00	**140**						
16	36	15,0	42	44	92	16	3	210,20	**160**						
18	36	17,0	42	44	92	18	3	250,60	**180**						
20	41	19,0	52	54	104	20	3	295,70	**200**						

P															
M															
K															
N									●		●		●		●
S															
H															
O															

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





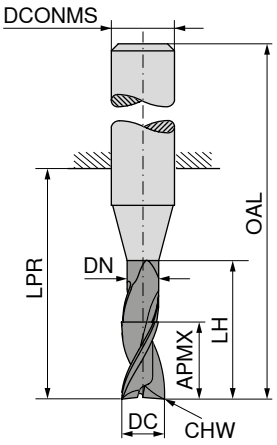

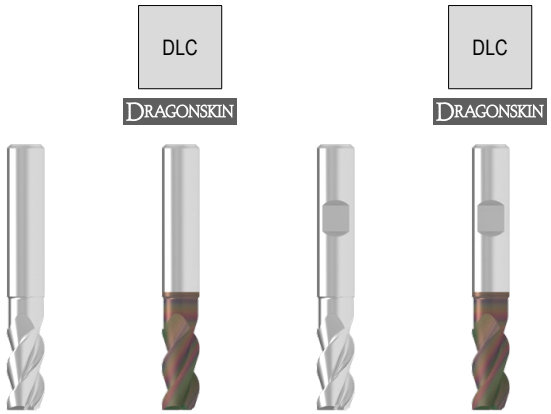

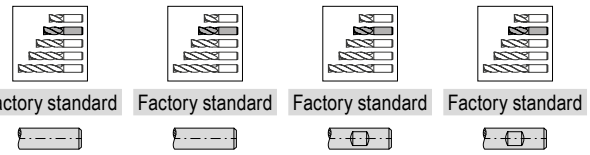

									53 611 ...		53 613 ...		53 612 ...		53 614 ...	
									Factory standard		Factory standard		Factory standard		Factory standard	
DC_{h6}	APMX	DN	LH	LPR	OAL	$DCONMS_{h6}$	CHW	ZEFP	EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	mm	mm		V1/5B		V1/5B		V1/5B		V1/5B	
2,0	4,5	1,8	6,0	14	50	6	0,05	3	31,03	**02100**	39,69	**02100**	31,03	**02100**	39,69	**02100**
2,5	5,5	2,3	7,5	19	55	6	0,05	3	30,63	**02600**	39,32	**02600**	30,63	**02600**	39,32	**02600**
3,0	6,5	2,8	9,0	19	55	6	0,10	3	31,42	**03100**	40,09	**03100**	31,42	**03100**	40,09	**03100**
3,5	8,5	3,3	12,0	19	55	6	0,10	3	33,02	**03600**	41,73	**03600**	33,02	**03600**	41,73	**03600**
4,0	8,5	3,8	12,0	19	55	6	0,10	3	33,38	**04100**	42,06	**04100**	33,38	**04100**	42,06	**04100**
4,5	10,5	4,3	15,0	22	58	6	0,10	3	42,40	**04600**	51,09	**04600**	42,40	**04600**	51,09	**04600**
5,0	10,5	4,8	15,0	22	58	6	0,10	3	37,25	**05100**	45,98	**05100**	37,25	**05100**	45,98	**05100**
5,5	13,0	5,3	18,0	22	58	6	0,10	3	43,44	**05600**	52,14	**05600**	43,44	**05600**	52,14	**05600**
6,0	13,0	5,8	18,0	22	58	6	0,20	3	38,05	**06100**	48,18	**06100**	38,05	**06100**	48,18	**06100**
6,5	17,0	6,2	24,0	28	64	8	0,20	3	45,98	**06600**	56,07	**06600**	45,98	**06600**	56,07	**06600**
7,0	17,0	6,7	24,0	28	64	8	0,20	3	44,85	**07100**	54,97	**07100**	44,85	**07100**	54,97	**07100**
7,5	17,0	7,2	24,0	28	64	8	0,20	3	43,64	**07600**	53,73	**07600**	43,64	**07600**	53,73	**07600**
8,0	17,0	7,7	24,0	28	64	8	0,20	3	41,63	**08100**	53,00	**08100**	41,63	**08100**	53,00	**08100**
8,5	21,0	8,2	30,0	34	74	10	0,20	3	70,86	**08600**	82,25	**08600**	70,86	**08600**	82,25	**08600**
9,0	21,0	8,7	30,0	34	74	10	0,20	3	69,02	**09100**	80,37	**09100**	69,02	**09100**	80,37	**09100**
9,5	21,0	9,2	30,0	34	74	10	0,20	3	67,08	**09600**	78,47	**09600**	67,08	**09600**	78,47	**09600**
10,0	21,0	9,7	30,0	34	74	10	0,20	3	63,98	**10100**	76,62	**10100**	63,98	**10100**	76,62	**10100**
10,5	25,0	10,1	36,0	40	85	12	0,20	3	98,02	**10600**	110,70	**10600**	98,02	**10600**	110,70	**10600**
11,0	25,0	10,6	36,0	40	85	12	0,20	3	95,32	**11100**	108,00	**11100**	95,32	**11100**	108,00	**11100**
11,5	25,0	11,1	36,0	40	85	12	0,20	3	92,51	**11600**	105,20	**11600**	92,51	**11600**	105,20	**11600**
12,0	25,0	11,6	36,0	40	85	12	0,20	3	90,79	**12100**	108,40	**12100**	90,79	**12100**	108,40	**12100**
12,5	29,0	12,1	42,0	46	91	14	0,20	3					124,50	**12600**	142,20	**12600**
13,0	29,0	12,6	42,0	46	91	14	0,20	3					123,40	**13100**	141,20	**13100**
13,5	29,0	13,1	42,0	46	91	14	0,20	3					122,40	**13600**	140,10	**13600**
14,0	29,0	13,6	42,0	46	91	14	0,20	3					123,60	**14100**	147,30	**14100**
14,5	33,0	14,0	48,0	52	100	16	0,20	3					169,00	**14600**	192,80	**14600**
15,0	33,0	14,5	48,0	52	100	16	0,20	3					165,20	**15100**	189,00	**15100**
15,5	33,0	15,0	48,0	52	100	16	0,20	3					161,20	**15600**	185,00	**15600**
16,0	33,0	15,5	48,0	52	100	16	0,20	3					169,90	**16100**	197,50	**16100**
16,5	38,0	16,0	54,0	58	106	18	0,20	3					219,60	**16600**	247,30	**16600**
17,0	38,0	16,5	54,0	58	106	18	0,20	3					213,70	**17100**	241,50	**17100**
17,5	38,0	17,0	54,0	58	106	18	0,20	3					207,40	**17600**	235,20	**17600**
18,0	38,0	17,5	54,0	58	106	18	0,20	3					204,80	**18100**	235,20	**18100**
18,5	42,0	18,0	60,0	64	114	20	0,20	3					271,50	**18600**	301,90	**18600**
19,0	42,0	18,5	60,0	64	114	20	0,20	3					264,10	**19100**	294,40	**19100**
19,5	42,0	19,0	60,0	64	114	20	0,20	3					256,50	**19600**	286,80	**19600**
20,0	42,0	19,5	60,0	64	114	20	0,20	3					252,00	**20100**	289,90	**20100**
P																
M																
K																
N									●		●		●		●	
S																
H																
O																

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





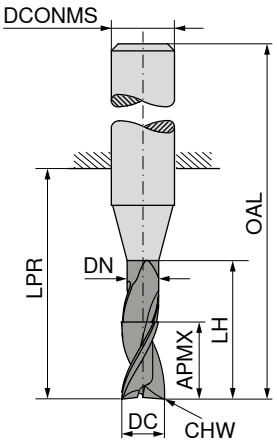

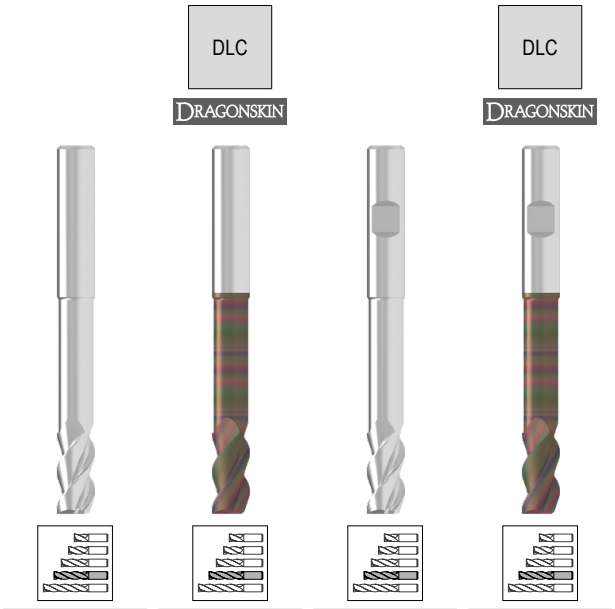

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 611 ... EUR V1/5B		53 613 ... EUR V1/5B		53 612 ... EUR V1/5B		53 614 ... EUR V1/5B	
2,0	5,5	1,8	10,0	19	55	6	0,05	3	37,20	**02200**	45,90	**02200**	37,20	**02200**	45,90	**02200**
2,5	6,5	2,3	12,5	22	58	6	0,05	3	36,71	**02700**	45,42	**02700**	36,71	**02700**	45,42	**02700**
3,0	8,0	2,8	15,0	22	58	6	0,10	3	37,66	**03200**	46,40	**03200**	37,66	**03200**	46,40	**03200**
3,5	10,5	3,3	20,0	26	62	6	0,10	3	39,63	**03700**	48,32	**03700**	39,63	**03700**	48,32	**03700**
4,0	10,5	3,8	20,0	26	62	6	0,10	3	40,05	**04200**	48,79	**04200**	40,05	**04200**	48,79	**04200**
4,5	13,0	4,3	25,0	34	70	6	0,10	3	50,89	**04700**	59,60	**04700**	50,89	**04700**	59,60	**04700**
5,0	13,0	4,8	25,0	34	70	6	0,10	3	44,71	**05200**	53,38	**05200**	44,71	**05200**	53,38	**05200**
5,5	16,0	5,3	30,0	34	70	6	0,10	3	52,14	**05700**	60,86	**05700**	52,14	**05700**	60,86	**05700**
6,0	16,0	5,8	30,0	34	70	6	0,20	3	45,69	**06200**	55,78	**06200**	45,69	**06200**	55,78	**06200**
6,5	21,0	6,2	40,0	44	80	8	0,20	3	55,15	**06700**	65,26	**06700**	55,15	**06700**	65,26	**06700**
7,0	21,0	6,7	40,0	44	80	8	0,20	3	53,78	**07200**	63,90	**07200**	53,78	**07200**	63,90	**07200**
7,5	21,0	7,2	40,0	44	80	8	0,20	3	52,35	**07700**	62,46	**07700**	52,35	**07700**	62,46	**07700**
8,0	21,0	7,7	40,0	44	80	8	0,20	3	49,97	**08200**	61,36	**08200**	49,97	**08200**	61,36	**08200**
8,5	26,0	8,2	50,0	54	94	10	0,20	3	85,01	**08700**	96,36	**08700**	85,01	**08700**	96,36	**08700**
9,0	26,0	8,7	50,0	54	94	10	0,20	3	82,83	**09200**	94,21	**09200**	82,83	**09200**	94,21	**09200**
9,5	26,0	9,2	50,0	54	94	10	0,20	3	80,50	**09700**	91,88	**09700**	80,50	**09700**	91,88	**09700**
10,0	26,0	9,7	50,0	54	94	10	0,20	3	76,79	**10200**	89,44	**10200**	76,79	**10200**	89,44	**10200**
10,5	31,0	10,1	60,0	64	109	12	0,20	3	117,60	**10700**	130,30	**10700**	117,60	**10700**	130,30	**10700**
11,0	31,0	10,6	60,0	64	109	12	0,20	3	114,40	**11200**	127,10	**11200**	114,40	**11200**	127,10	**11200**
11,5	31,0	11,1	60,0	64	109	12	0,20	3	111,00	**11700**	123,70	**11700**	111,00	**11700**	123,70	**11700**
12,0	31,0	11,6	60,0	64	109	12	0,20	3	108,90	**12200**	126,70	**12200**	108,90	**12200**	126,70	**12200**
12,5	36,0	12,1	70,0	74	119	14	0,20	3					174,40	**12700**	192,00	**12700**
13,0	36,0	12,6	70,0	74	119	14	0,20	3					173,00	**13200**	190,60	**13200**
13,5	36,0	13,1	70,0	74	119	14	0,20	3					171,40	**13700**	189,00	**13700**
14,0	36,0	13,6	70,0	74	119	14	0,20	3					173,10	**14200**	196,90	**14200**
14,5	41,0	14,0	80,0	84	132	16	0,20	3					236,70	**14700**	260,50	**14700**
15,0	41,0	14,5	80,0	84	132	16	0,20	3					231,40	**15200**	255,20	**15200**
15,5	41,0	15,0	80,0	84	132	16	0,20	3					225,90	**15700**	249,60	**15700**
16,0	41,0	15,5	80,0	84	132	16	0,20	3					237,80	**16200**	265,60	**16200**
16,5	47,0	16,0	90,0	94	142	18	0,20	3					307,40	**16700**	335,20	**16700**
17,0	47,0	16,5	90,0	94	142	18	0,20	3					299,20	**17200**	326,80	**17200**
17,5	47,0	17,0	90,0	94	142	18	0,20	3					290,40	**17700**	318,10	**17700**
18,0	47,0	17,5	90,0	94	142	18	0,20	3					286,80	**18200**	317,10	**18200**
18,5	52,0	18,0	100,0	104	154	20	0,20	3					380,10	**18700**	410,50	**18700**
19,0	52,0	18,5	100,0	104	154	20	0,20	3					369,80	**19200**	400,10	**19200**
19,5	52,0	19,0	100,0	104	154	20	0,20	3					359,00	**19700**	389,30	**19700**
20,0	52,0	19,5	100,0	104	154	20	0,20	3					352,60	**20200**	390,70	**20200**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





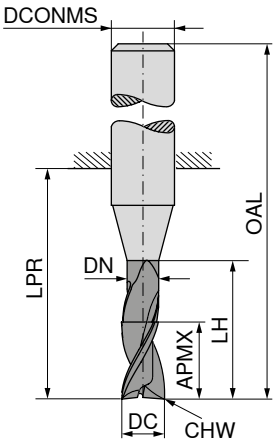

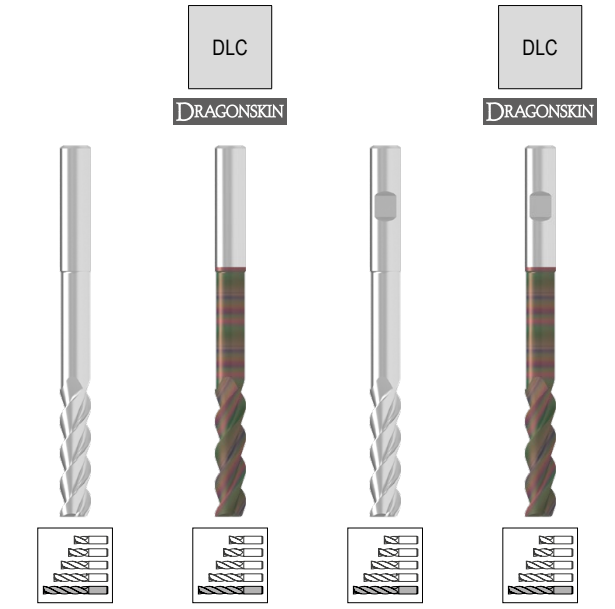

Factory standard | Factory standard | Factory standard | Factory standard

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 611 ... EUR V1/5B		53 613 ... EUR V1/5B		53 612 ... EUR V1/5B		53 614 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm	mm									
2,0	8,5	1,8	16	26	62	6	0,05	3	49,61	02400	58,33	02400	49,61	02400	58,33	02400
2,5	10,5	2,3	20	31	67	6	0,05	3	48,96	02900	57,67	02900	48,96	02900	57,67	02900
3,0	12,5	2,8	24	31	67	6	0,10	3	50,26	03400	58,98	03400	50,26	03400	58,98	03400
3,5	16,5	3,3	32	38	74	6	0,10	3	52,84	03900	61,53	03900	52,84	03900	61,53	03900
4,0	16,5	3,8	32	38	74	6	0,10	3	53,38	04400	62,12	04400	53,38	04400	62,12	04400
4,5	20,5	4,3	40	52	88	6	0,10	3	67,85	04900	76,55	04900	67,85	04900	76,55	04900
5,0	20,5	4,8	40	52	88	6	0,10	3	59,65	05400	68,32	05400	59,65	05400	68,32	05400
5,5	25,0	5,3	48	52	88	6	0,10	3	69,50	05900	78,24	05900	69,50	05900	78,24	05900
6,0	25,0	5,8	48	52	88	6	0,20	3	60,91	06400	71,03	06400	60,91	06400	71,03	06400
6,5	33,0	6,2	64	68	104	8	0,20	3	73,55	06900	83,66	06900	73,55	06900	83,66	06900
7,0	33,0	6,7	64	68	104	8	0,20	3	71,75	07400	81,86	07400	71,75	07400	81,86	07400
7,5	33,0	7,2	64	68	104	8	0,20	3	69,79	07900	79,91	07900	69,79	07900	79,91	07900
8,0	33,0	7,7	64	68	104	8	0,20	3	66,60	08400	77,97	08400	66,60	08400	77,97	08400
8,5	41,0	8,2	80	84	124	10	0,20	3	113,40	08900	124,70	08900	113,40	08900	124,70	08900
9,0	41,0	8,7	80	84	124	10	0,20	3	110,40	09400	121,80	09400	110,40	09400	121,80	09400
9,5	41,0	9,2	80	84	124	10	0,20	3	107,30	09900	118,70	09900	107,30	09900	118,70	09900
10,0	41,0	9,7	80	84	124	10	0,20	3	102,40	10400	115,00	10400	102,40	10400	115,00	10400
10,5	49,0	10,1	96	100	145	12	0,20	3	156,80	10900	169,60	10900	156,80	10900	169,60	10900
11,0	49,0	10,6	96	100	145	12	0,20	3	152,60	11400	165,10	11400	152,60	11400	165,10	11400
11,5	49,0	11,1	96	100	145	12	0,20	3	148,00	11900	160,60	11900	148,00	11900	160,60	11900
12,0	49,0	11,6	96	100	145	12	0,20	3	145,30	12400	163,00	12400	145,30	12400	163,00	12400
12,5	57,0	12,1	112	116	161	14	0,20	3					236,60	12900	254,20	12900
13,0	57,0	12,6	112	116	161	14	0,20	3					234,60	13400	252,20	13400
13,5	57,0	13,1	112	116	161	14	0,20	3					232,70	13900	250,20	13900
14,0	57,0	13,6	112	116	161	14	0,20	3					234,80	14400	258,60	14400
14,5	65,0	14,0	128	132	180	16	0,20	3					321,20	14900	345,00	14900
15,0	65,0	14,5	128	132	180	16	0,20	3					314,20	15400	338,00	15400
15,5	65,0	15,0	128	132	180	16	0,20	3					306,70	15900	330,30	15900
16,0	65,0	15,5	128	132	180	16	0,20	3					322,60	16400	350,50	16400
16,5	74,0	16,0	144	148	196	18	0,20	3					417,20	16900	444,90	16900
17,0	74,0	16,5	144	148	196	18	0,20	3					405,80	17400	433,60	17400
17,5	74,0	17,0	144	148	196	18	0,20	3					394,10	17900	421,80	17900
18,0	74,0	17,5	144	148	196	18	0,20	3					389,20	18400	419,40	18400
18,5	82,0	18,0	160	164	214	20	0,20	3					516,00	18900	546,40	18900
19,0	82,0	18,5	160	164	214	20	0,20	3					501,80	19400	532,20	19400
19,5	82,0	19,0	160	164	214	20	0,20	3					487,20	19900	517,50	19900
20,0	82,0	19,5	160	164	214	20	0,20	3					478,50	20400	516,60	20400
P																
M																
K																
N									●		●		●		●	
S																
H																
O																

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With graduated flute depth



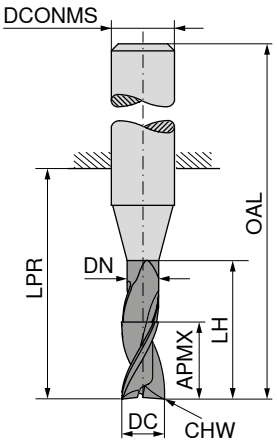

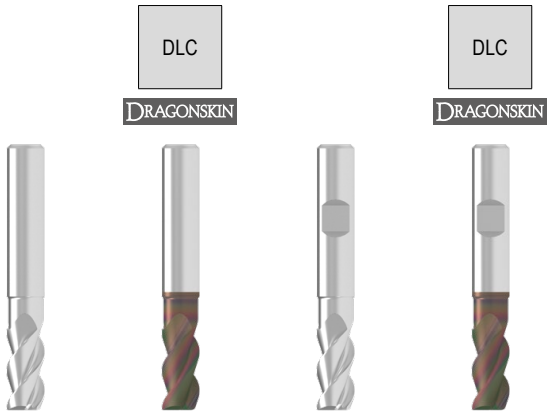

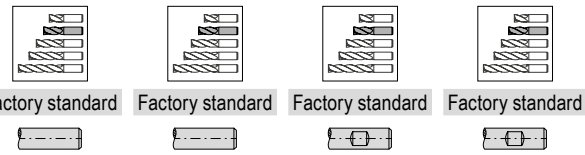

									Factory standard	Factory standard	Factory standard	Factory standard
									53 584 ...	53 598 ...	53 597 ...	53 599 ...
DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	EUR V1/5B	EUR V1/5B	EUR V1/5B	EUR V1/5B
mm	mm	mm	mm	mm	mm	mm	mm					
3,0	8	2,7	12	21	57	6	0,1	3	38,33 03000	47,06 03000	38,33 03000	47,06 03000
3,5	8	3,2	12	21	57	6	0,1	3	38,73 03600	47,45 03600	38,73 03600	47,45 03600
4,0	11	3,7	18	21	57	6	0,1	3	38,33 04000	47,06 04000	38,33 04000	47,06 04000
4,5	11	4,2	18	21	57	6	0,1	3	38,51 04600	48,60 04600	38,51 04600	48,60 04600
5,0	13	4,7	18	21	57	6	0,1	3	38,46 05000	48,56 05000	38,46 05000	48,56 05000
5,5	13	5,2	18	21	57	6	0,1	3	38,33 05600	48,44 05600	38,33 05600	48,44 05600
6,0	13	5,7	18	21	57	6	0,2	3	39,04 06000	49,15 06000	39,04 06000	49,15 06000
6,5	21	6,1	25	27	63	8	0,2	3	45,72 06600	58,55 06600	45,72 06600	58,55 06600
7,0	21	6,6	25	27	63	8	0,2	3	44,91 07000	58,55 07000	44,91 07000	58,55 07000
7,5	21	7,1	25	27	63	8	0,2	3	45,36 07600	56,71 07600	45,36 07600	56,71 07600
8,0	21	7,4	25	27	63	8	0,2	3	45,87 08000	57,26 08000	45,87 08000	57,26 08000
8,5	22	7,9	30	33	73	10	0,2	3	83,11 08600	95,76 08600	83,11 08600	95,76 08600
9,0	22	8,4	30	33	73	10	0,2	3	83,31 09000	95,95 09000	83,31 09000	95,95 09000
9,5	22	8,9	30	33	73	10	0,2	3	83,17 09600	95,81 09600	83,17 09600	95,81 09600
10,0	22	9,2	30	33	73	10	0,2	3	83,07 10000	95,72 10000	83,07 10000	95,72 10000
10,5	26	9,7	36	38	83	12	0,2	3	115,90 10600	133,60 10600	115,90 10600	133,60 10600
11,0	26	10,0	36	38	83	12	0,2	3	115,90 11000	133,60 11000	115,90 11000	133,60 11000
11,5	26	10,5	36	38	83	12	0,2	3	115,80 11600	133,40 11600	115,80 11600	133,40 11600
12,0	26	11,0	36	38	83	12	0,2	3	115,50 12000	133,30 12000	115,50 12000	133,30 12000
12,5	26	11,5	36	38	83	14	0,2	3			143,30 12600	167,00 12600
13,0	26	12,0	36	38	83	14	0,2	3			143,20 13000	167,00 13000
13,5	26	12,5	36	38	83	14	0,2	3			143,20 13600	167,00 13600
14,0	26	13,0	36	38	83	14	0,2	3			143,00 14000	166,90 14000
14,5	36	13,5	42	44	92	16	0,2	3			223,90 14600	251,70 14600
15,0	36	14,0	42	44	92	16	0,2	3			223,90 15000	251,70 15000
15,5	36	14,5	42	44	92	16	0,2	3			223,90 15600	251,70 15600
16,0	36	15,0	42	44	92	16	0,2	3			223,70 16000	251,60 16000
16,5	36	15,5	42	44	92	18	0,2	3			293,70 16600	324,00 16600
17,0	36	16,0	42	44	92	18	0,2	3			293,50 17000	323,80 17000
17,5	36	16,5	42	44	92	18	0,2	3			293,40 17600	323,70 17600
18,0	36	17,0	42	44	92	18	0,2	3			293,40 18000	323,70 18000
18,5	41	17,5	52	54	104	20	0,2	3			339,10 18600	377,20 18600
19,0	41	18,0	52	54	104	20	0,2	3			339,10 19000	377,20 19000
19,5	41	18,5	52	54	104	20	0,2	3			339,00 19600	376,90 19600
20,0	41	19,0	52	54	104	20	0,2	3			338,80 20000	376,80 20000
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes





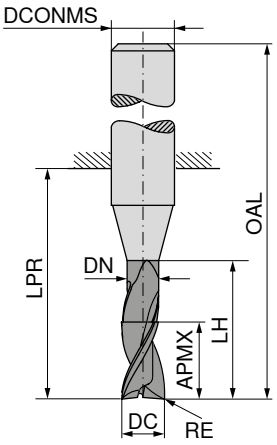

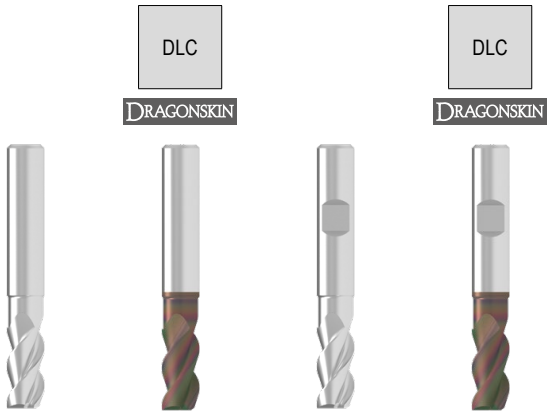

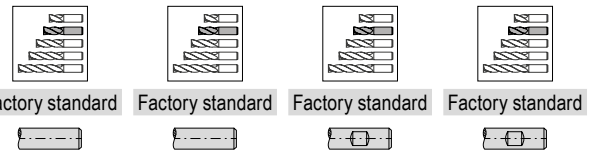

DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	53 708 ... EUR V1/5B		53 710 ... EUR V1/5B		53 709 ... EUR V1/5B		53 711 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm	mm									
2	0,3	4,5	1,8	6	14	50	6	3	32,59	02103	41,29	02103	32,59	02103	41,29	02103
2	0,5	4,5	1,8	6	14	50	6	3	32,59	02105	41,29	02105	32,59	02105	41,29	02105
3	0,3	6,5	2,7	9	19	55	6	3	33,46	03103	42,16	03103	33,46	03103	42,16	03103
3	0,5	6,5	2,7	9	19	55	6	3	33,46	03105	42,16	03105	33,46	03105	42,16	03105
3	1,0	6,5	2,7	9	19	55	6	3	33,46	03110	42,16	03110	33,46	03110	42,16	03110
4	0,3	8,5	3,7	12	19	55	6	3	35,53	04103	44,26	04103	35,53	04103	44,26	04103
4	0,5	8,5	3,7	12	19	55	6	3	35,53	04105	44,26	04105	35,53	04105	44,26	04105
4	1,0	8,5	3,7	12	19	55	6	3	35,53	04110	44,26	04110	35,53	04110	44,26	04110
5	0,3	10,5	4,7	15	22	58	6	3	39,67	05103	48,38	05103	39,67	05103	48,38	05103
5	0,5	10,5	4,7	15	22	58	6	3	39,67	05105	48,38	05105	39,67	05105	48,38	05105
5	1,0	10,5	4,7	15	22	58	6	3	39,67	05110	48,38	05110	39,67	05110	48,38	05110
6	0,3	13,0	5,7	18	22	58	6	3	40,55	06103	50,66	06103	40,55	06103	50,66	06103
6	0,5	13,0	5,7	18	22	58	6	3	40,55	06105	50,66	06105	40,55	06105	50,66	06105
6	1,0	13,0	5,7	18	22	58	6	3	40,55	06110	50,66	06110	40,55	06110	50,66	06110
6	1,5	13,0	5,7	18	22	58	6	3	40,55	06115	50,66	06115	40,55	06115	50,66	06115
8	0,3	17,0	7,4	24	28	64	8	3	44,35	08103	55,71	08103	44,35	08103	55,71	08103
8	0,5	17,0	7,4	24	28	64	8	3	44,35	08105	55,71	08105	44,35	08105	55,71	08105
8	1,0	17,0	7,4	24	28	64	8	3	44,35	08110	55,71	08110	44,35	08110	55,71	08110
8	1,5	17,0	7,4	24	28	64	8	3	44,35	08115	55,71	08115	44,35	08115	55,71	08115
8	2,0	17,0	7,4	24	28	64	8	3	44,35	08120	55,71	08120	44,35	08120	55,71	08120
10	0,3	21,0	9,2	30	34	74	10	3	68,13	10103	80,78	10103	68,13	10103	80,78	10103
10	0,5	21,0	9,2	30	34	74	10	3	68,13	10105	80,78	10105	68,13	10105	80,78	10105
10	1,0	21,0	9,2	30	34	74	10	3	68,13	10110	80,78	10110	68,13	10110	80,78	10110
10	1,5	21,0	9,2	30	34	74	10	3	68,13	10115	80,78	10115	68,13	10115	80,78	10115
10	2,0	21,0	9,2	30	34	74	10	3	68,13	10120	80,78	10120	68,13	10120	80,78	10120
10	3,0	21,0	9,2	30	34	74	10	3	68,13	10130	80,78	10130	68,13	10130	80,78	10130
12	0,3	25,0	11,0	36	40	85	12	3	96,68	12103	114,40	12103	96,68	12103	114,40	12103
12	0,5	25,0	11,0	36	40	85	12	3	96,68	12105	114,40	12105	96,68	12105	114,40	12105
12	1,0	25,0	11,0	36	40	85	12	3	96,68	12110	114,40	12110	96,68	12110	114,40	12110
12	1,5	25,0	11,0	36	40	85	12	3	96,68	12115	114,40	12115	96,68	12115	114,40	12115
12	2,0	25,0	11,0	36	40	85	12	3	96,68	12120	114,40	12120	96,68	12120	114,40	12120
12	3,0	25,0	11,0	36	40	85	12	3	96,68	12130	114,40	12130	96,68	12130	114,40	12130
12	4,0	25,0	11,0	36	40	85	12	3	96,68	12140	114,40	12140	96,68	12140	114,40	12140
16	0,3	33,0	15,0	48	52	100	16	3					155,60	16103	183,40	16103
16	0,5	33,0	15,0	48	52	100	16	3					155,60	16105	183,40	16105
16	1,0	33,0	15,0	48	52	100	16	3					155,60	16110	183,40	16110
16	1,5	33,0	15,0	48	52	100	16	3					155,60	16115	183,40	16115

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

Continued on next page

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes





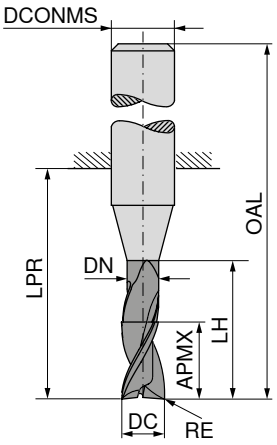

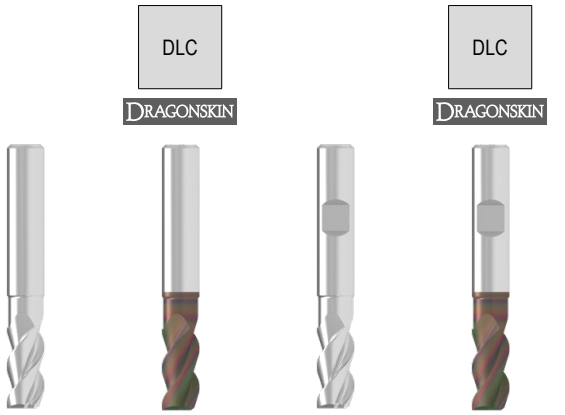

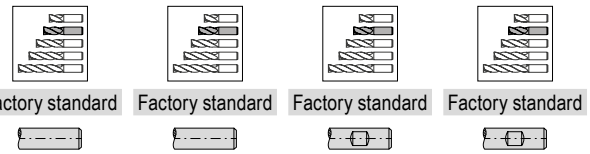

DC h6 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 708 ... EUR V1/5B		53 710 ... EUR V1/5B		53 709 ... EUR V1/5B		53 711 ... EUR V1/5B	
16	2,0	33,0	15,0	48	52	100	16	3					155,60	**16120**	183,40	**16120**
16	3,0	33,0	15,0	48	52	100	16	3					155,60	**16130**	183,40	**16130**
16	4,0	33,0	15,0	48	52	100	16	3					155,60	**16140**	183,40	**16140**
20	0,5	42,0	19,0	60	64	114	20	3					245,10	**20105**	283,10	**20105**
20	1,0	42,0	19,0	60	64	114	20	3					245,10	**20110**	283,10	**20110**
20	1,5	42,0	19,0	60	64	114	20	3					245,10	**20115**	283,10	**20115**
20	2,0	42,0	19,0	60	64	114	20	3					245,10	**20120**	283,10	**20120**
20	3,0	42,0	19,0	60	64	114	20	3					245,10	**20130**	283,10	**20130**
20	4,0	42,0	19,0	60	64	114	20	3					245,10	**20140**	283,10	**20140**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



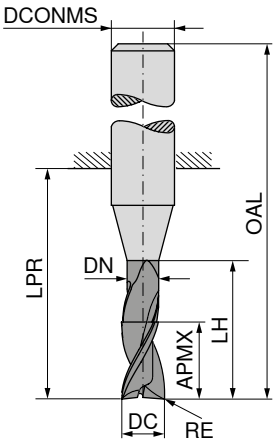

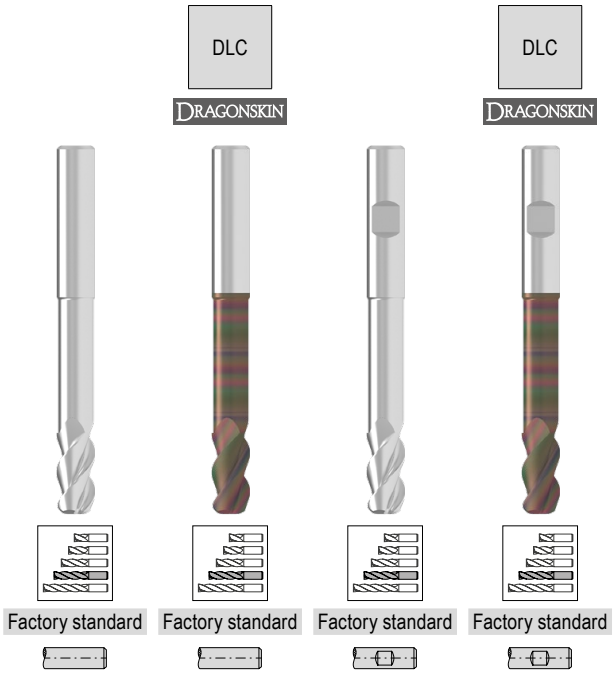

									Factory standard	Factory standard	Factory standard	Factory standard
									53 708 ...	53 710 ...	53 709 ...	53 711 ...
DC h6 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	EUR V1/5B	EUR V1/5B	EUR V1/5B
2	0,3	5,5	1,8	10	19	55	6	3	39,08 02203	47,83 02203	39,08 02203	47,83 02203
2	0,5	5,5	1,8	10	19	55	6	3	39,08 02205	47,83 02205	39,08 02205	47,83 02205
3	0,3	8,0	2,7	15	22	58	6	3	40,16 03203	48,87 03203	40,16 03203	48,87 03203
3	0,5	8,0	2,7	15	22	58	6	3	40,16 03205	48,87 03205	40,16 03205	48,87 03205
3	1,0	8,0	2,7	15	22	58	6	3	40,16 03210	48,87 03210	40,16 03210	48,87 03210
4	0,3	10,5	3,7	20	26	62	6	3	42,66 04203	51,37 04203	42,66 04203	51,37 04203
4	0,5	10,5	3,7	20	26	62	6	3	42,66 04205	51,37 04205	42,66 04205	51,37 04205
4	1,0	10,5	3,7	20	26	62	6	3	42,66 04210	51,37 04210	42,66 04210	51,37 04210
5	0,3	13,0	4,7	25	34	70	6	3	47,61 05203	56,30 05203	47,61 05203	56,30 05203
5	0,5	13,0	4,7	25	34	70	6	3	47,61 05205	56,30 05205	47,61 05205	56,30 05205
5	1,0	13,0	4,7	25	34	70	6	3	47,61 05210	56,30 05210	47,61 05210	56,30 05210
6	0,3	16,0	5,7	30	34	70	6	3	48,63 06203	58,75 06203	48,63 06203	58,75 06203
6	0,5	16,0	5,7	30	34	70	6	3	48,63 06205	58,75 06205	48,63 06205	58,75 06205
6	1,0	16,0	5,7	30	34	70	6	3	48,63 06210	58,75 06210	48,63 06210	58,75 06210
6	1,5	16,0	5,7	30	34	70	6	3	48,63 06215	58,75 06215	48,63 06215	58,75 06215
8	0,3	21,0	7,4	40	44	80	8	3	53,25 08203	64,60 08203	53,25 08203	64,60 08203
8	0,5	21,0	7,4	40	44	80	8	3	53,25 08205	64,60 08205	53,25 08205	64,60 08205
8	1,0	21,0	7,4	40	44	80	8	3	53,25 08210	64,60 08210	53,25 08210	64,60 08210
8	1,5	21,0	7,4	40	44	80	8	3	53,25 08215	64,60 08215	53,25 08215	64,60 08215
8	2,0	21,0	7,4	40	44	80	8	3	53,25 08220	64,60 08220	53,25 08220	64,60 08220
10	0,3	26,0	9,2	50	54	94	10	3	81,77 10203	94,43 10203	81,77 10203	94,43 10203
10	0,5	26,0	9,2	50	54	94	10	3	81,77 10205	94,43 10205	81,77 10205	94,43 10205
10	1,0	26,0	9,2	50	54	94	10	3	81,77 10210	94,43 10210	81,77 10210	94,43 10210
10	1,5	26,0	9,2	50	54	94	10	3	81,77 10215	94,43 10215	81,77 10215	94,43 10215
10	2,0	26,0	9,2	50	54	94	10	3	81,77 10220	94,43 10220	81,77 10220	94,43 10220
10	3,0	26,0	9,2	50	54	94	10	3	81,77 10230	94,43 10230	81,77 10230	94,43 10230
12	0,3	31,0	11,0	60	64	109	12	3	116,00 12203	133,70 12203	116,00 12203	133,70 12203
12	0,5	31,0	11,0	60	64	109	12	3	116,00 12205	133,70 12205	116,00 12205	133,70 12205
12	1,0	31,0	11,0	60	64	109	12	3	116,00 12210	133,70 12210	116,00 12210	133,70 12210
12	1,5	31,0	11,0	60	64	109	12	3	116,00 12215	133,70 12215	116,00 12215	133,70 12215
12	2,0	31,0	11,0	60	64	109	12	3	116,00 12220	133,70 12220	116,00 12220	133,70 12220
12	3,0	31,0	11,0	60	64	109	12	3	116,00 12230	133,70 12230	116,00 12230	133,70 12230
12	4,0	31,0	11,0	60	64	109	12	3	116,00 12240	133,70 12240	116,00 12240	133,70 12240
16	0,3	41,0	15,0	80	84	132	16	3			249,00 16203	276,60 16203
16	0,5	41,0	15,0	80	84	132	16	3			249,00 16205	276,60 16205
16	1,0	41,0	15,0	80	84	132	16	3			249,00 16210	276,60 16210
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

Continued on next page

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



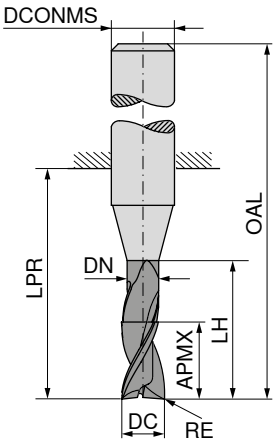

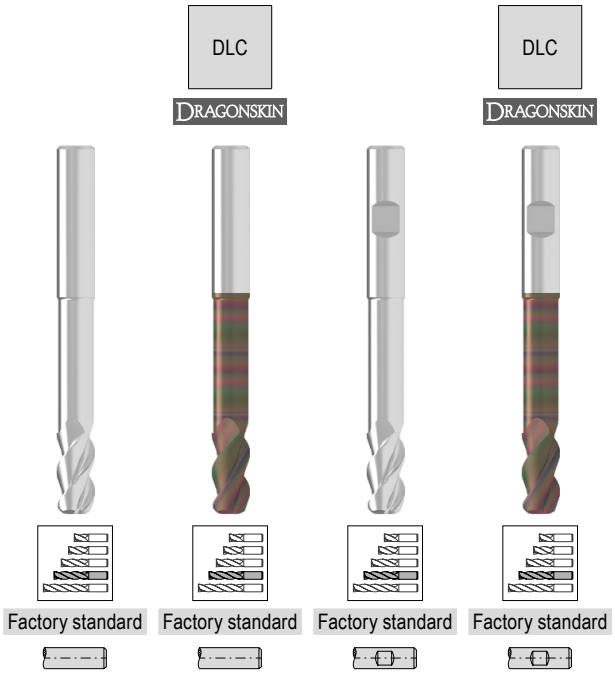

DC h6 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 708 ... EUR V1/5B		53 710 ... EUR V1/5B		53 709 ... EUR V1/5B		53 711 ... EUR V1/5B	
16	1,5	41,0	15,0	80	84	132	16	3					249,00	**16215**	276,60	**16215**
16	2,0	41,0	15,0	80	84	132	16	3					249,00	**16220**	276,60	**16220**
16	3,0	41,0	15,0	80	84	132	16	3					249,00	**16230**	276,60	**16230**
16	4,0	41,0	15,0	80	84	132	16	3					249,00	**16240**	276,60	**16240**
20	0,5	52,0	19,0	100	104	154	20	3					392,20	**20205**	430,20	**20205**
20	1,0	52,0	19,0	100	104	154	20	3					392,20	**20210**	430,20	**20210**
20	1,5	52,0	19,0	100	104	154	20	3					392,20	**20215**	430,20	**20215**
20	2,0	52,0	19,0	100	104	154	20	3					392,20	**20220**	430,20	**20220**
20	3,0	52,0	19,0	100	104	154	20	3					392,20	**20230**	430,20	**20230**
20	4,0	52,0	19,0	100	104	154	20	3					392,20	**20240**	430,20	**20240**

P																
M																
K																
N									●		●		●		●	
S																
H																
O																

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



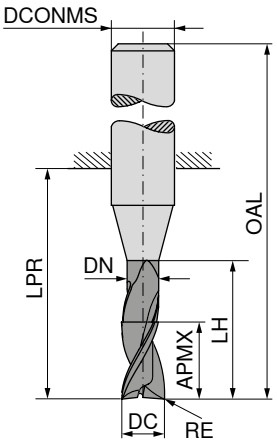

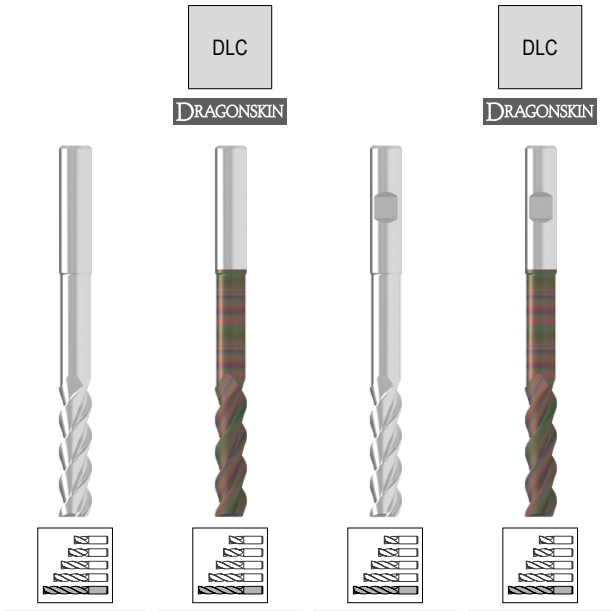

									Factory standard	Factory standard	Factory standard	Factory standard
									53 708 ...	53 710 ...	53 709 ...	53 711 ...
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR V1/5B	EUR V1/5B	EUR V1/5B	EUR V1/5B
mm	mm	mm	mm	mm	mm	mm	mm					
2	0,3	8,5	1,8	16	26	62	6	3	42,37 02403	51,05 02403	42,37 02403	51,05 02403
2	0,5	8,5	1,8	16	26	62	6	3	42,37 02405	51,05 02405	42,37 02405	51,05 02405
3	0,3	12,5	2,7	24	31	67	6	3	43,51 03403	52,22 03403	43,51 03403	52,22 03403
3	0,5	12,5	2,7	24	31	67	6	3	43,51 03405	52,22 03405	43,51 03405	52,22 03405
3	1,0	12,5	2,7	24	31	67	6	3	43,51 03410	52,22 03410	43,51 03410	52,22 03410
4	0,3	16,5	3,7	32	38	74	6	3	47,97 04403	56,71 04403	47,97 04403	56,71 04403
4	0,5	16,5	3,7	32	38	74	6	3	47,97 04405	56,71 04405	47,97 04405	56,71 04405
4	1,0	16,5	3,7	32	38	74	6	3	47,97 04410	56,71 04410	46,21 04410	54,95 04410
5	0,3	20,5	4,7	40	52	88	6	3	51,57 05403	60,27 05403	51,57 05403	60,27 05403
5	0,5	20,5	4,7	40	52	88	6	3	51,57 05405	60,27 05405	51,57 05405	60,27 05405
5	1,0	20,5	4,7	40	52	88	6	3	51,57 05410	60,27 05410	51,57 05410	60,27 05410
6	0,3	25,0	5,7	48	52	88	6	3	52,71 06403	62,83 06403	52,71 06403	62,83 06403
6	0,5	25,0	5,7	48	52	88	6	3	52,71 06405	62,83 06405	52,71 06405	62,83 06405
6	1,0	25,0	5,7	48	52	88	6	3	52,71 06410	62,83 06410	52,71 06410	62,83 06410
6	1,5	25,0	5,7	48	52	88	6	3	52,71 06415	62,83 06415	52,71 06415	62,83 06415
8	0,3	33,0	7,4	64	68	104	8	3	70,97 08403	82,33 08403	70,97 08403	82,33 08403
8	0,5	33,0	7,4	64	68	104	8	3	70,97 08405	82,33 08405	70,97 08405	82,33 08405
8	1,0	33,0	7,4	64	68	104	8	3	70,97 08410	82,33 08410	70,97 08410	82,33 08410
8	1,5	33,0	7,4	64	68	104	8	3	70,97 08415	82,33 08415	70,97 08415	82,33 08415
8	2,0	33,0	7,4	64	68	104	8	3	70,97 08420	82,33 08420	70,97 08420	82,33 08420
10	0,3	41,0	9,2	80	84	124	10	3	109,00 10403	121,70 10403	109,00 10403	121,70 10403
10	0,5	41,0	9,2	80	84	124	10	3	109,00 10405	121,70 10405	109,00 10405	121,70 10405
10	1,0	41,0	9,2	80	84	124	10	3	109,00 10410	121,70 10410	109,00 10410	121,70 10410
10	1,5	41,0	9,2	80	84	124	10	3	109,00 10415	121,70 10415	109,00 10415	121,70 10415
10	2,0	41,0	9,2	80	84	124	10	3	109,00 10420	121,70 10420	109,00 10420	121,70 10420
10	3,0	41,0	9,2	80	84	124	10	3	109,00 10430	121,70 10430	109,00 10430	121,70 10430
12	0,3	49,0	11,0	96	100	145	12	3	154,70 12403	172,40 12403	154,70 12403	172,40 12403
12	0,5	49,0	11,0	96	100	145	12	3	154,70 12405	172,40 12405	154,70 12405	172,40 12405
12	1,0	49,0	11,0	96	100	145	12	3	154,70 12410	172,40 12410	154,70 12410	172,40 12410
12	1,5	49,0	11,0	96	100	145	12	3	154,70 12415	172,40 12415	154,70 12415	172,40 12415
12	2,0	49,0	11,0	96	100	145	12	3	154,70 12420	172,40 12420	154,70 12420	172,40 12420
12	3,0	49,0	11,0	96	100	145	12	3	154,70 12430	172,40 12430	154,70 12430	172,40 12430
12	4,0	49,0	11,0	96	100	145	12	3	154,70 12440	172,40 12440	154,70 12440	172,40 12440
16	0,3	65,0	15,0	128	132	180	16	3			283,40 16403	311,10 16403
16	0,5	65,0	15,0	128	132	180	16	3			283,40 16405	311,10 16405
16	1,0	65,0	15,0	128	132	180	16	3			283,40 16410	311,10 16410

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

Continued on next page

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



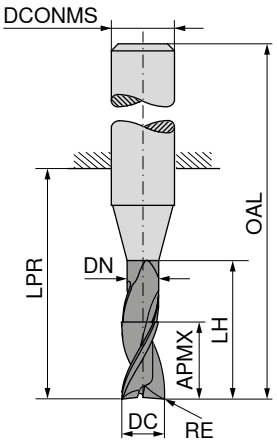

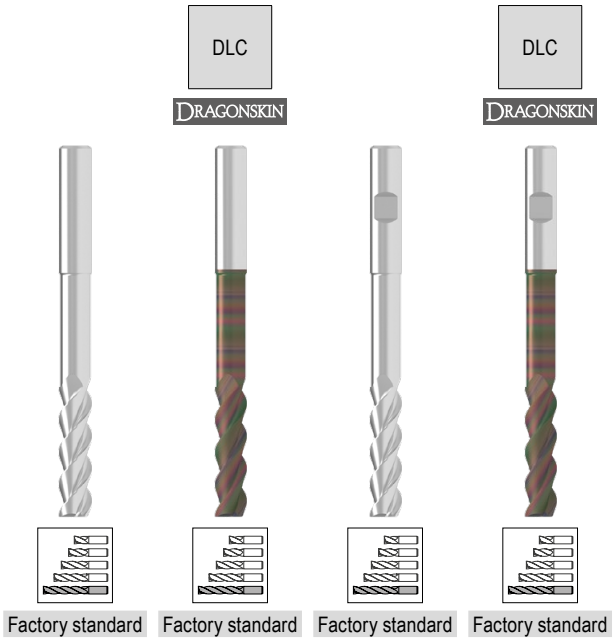

									Factory standard	Factory standard	Factory standard	Factory standard
									53 708 ...	53 710 ...	53 709 ...	53 711 ...
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR V1/5B	EUR V1/5B	EUR V1/5B	EUR V1/5B
mm	mm	mm	mm	mm	mm	mm	mm					
16	1,5	65,0	15,0	128	132	180	16	3			283,40 **16415**	311,10 **16415**
16	2,0	65,0	15,0	128	132	180	16	3			283,40 **16420**	311,10 **16420**
16	3,0	65,0	15,0	128	132	180	16	3			283,40 **16430**	311,10 **16430**
16	4,0	65,0	15,0	128	132	180	16	3			283,40 **16440**	311,10 **16440**
20	0,5	82,0	19,0	160	164	214	20	3			464,70 **20405**	502,60 **20405**
20	1,0	82,0	19,0	160	164	214	20	3			464,70 **20410**	502,60 **20410**
20	1,5	82,0	19,0	160	164	214	20	3			464,70 **20415**	502,60 **20415**
20	2,0	82,0	19,0	160	164	214	20	3			464,70 **20420**	502,60 **20420**
20	3,0	82,0	19,0	160	164	214	20	3			464,70 **20430**	502,60 **20430**
20	4,0	82,0	19,0	160	164	214	20	3			464,70 **20440**	502,60 **20440**
P												
M												
K												
N									●	●	●	●
S												
H												
O												

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes



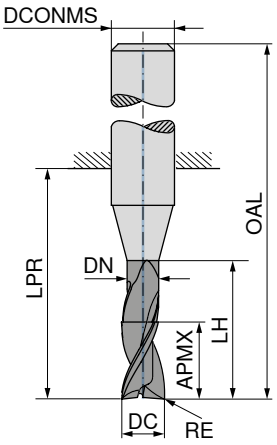

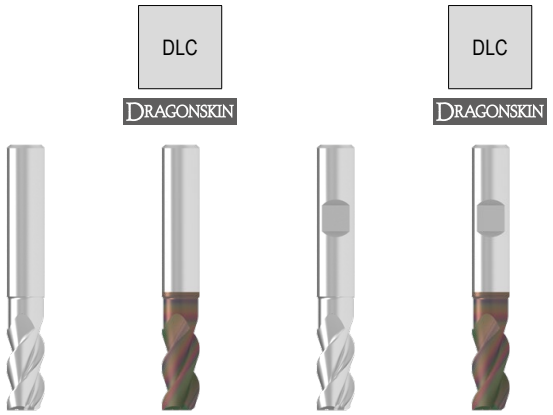

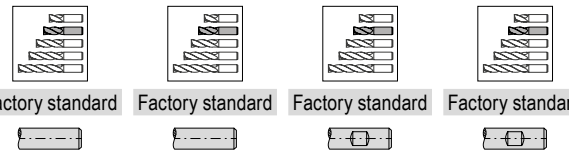

									53 712 ...		53 714 ...		53 713 ...		53 715 ...	
DC h6	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	mm	mm		V1/5B		V1/5B		V1/5B		V1/5B	
6	0,3	13	5,7	18	22	58	6	3	46,60	06103	56,73	06103	46,60	06103	56,73	06103
6	0,5	13	5,7	18	22	58	6	3	46,60	06105	56,73	06105	46,60	06105	56,73	06105
6	1,0	13	5,7	18	22	58	6	3	46,60	06110	56,73	06110	46,60	06110	56,73	06110
6	1,5	13	5,7	18	22	58	6	3	46,60	06115	56,73	06115	46,60	06115	56,73	06115
8	0,3	17	7,4	24	28	64	8	3	61,73	08103	73,07	08103	61,73	08103	73,07	08103
8	0,5	17	7,4	24	28	64	8	3	61,73	08105	73,07	08105	61,73	08105	73,07	08105
8	1,0	17	7,4	24	28	64	8	3	61,73	08110	73,07	08110	61,73	08110	73,07	08110
8	1,5	17	7,4	24	28	64	8	3	61,73	08115	73,07	08115	61,73	08115	73,07	08115
8	2,0	17	7,4	24	28	64	8	3	61,73	08120	73,07	08120	61,73	08120	73,07	08120
10	0,3	21	9,2	30	34	74	10	3	94,84	10103	107,50	10103	94,84	10103	107,50	10103
10	0,5	21	9,2	30	34	74	10	3	94,84	10105	107,50	10105	94,84	10105	107,50	10105
10	1,0	21	9,2	30	34	74	10	3	94,84	10110	107,50	10110	94,84	10110	107,50	10110
10	1,5	21	9,2	30	34	74	10	3	94,84	10115	107,50	10115	94,84	10115	107,50	10115
10	2,0	21	9,2	30	34	74	10	3	94,84	10120	107,50	10120	94,84	10120	107,50	10120
10	3,0	21	9,2	30	34	74	10	3	94,84	10130	107,50	10130	94,84	10130	107,50	10130
12	0,3	25	11,0	36	40	85	12	3	134,60	12103	152,30	12103	134,60	12103	152,30	12103
12	0,5	25	11,0	36	40	85	12	3	134,60	12105	152,30	12105	134,60	12105	152,30	12105
12	1,0	25	11,0	36	40	85	12	3	134,60	12110	152,30	12110	134,60	12110	152,30	12110
12	1,5	25	11,0	36	40	85	12	3	134,60	12115	152,30	12115	134,60	12115	152,30	12115
12	2,0	25	11,0	36	40	85	12	3	134,60	12120	152,30	12120	134,60	12120	152,30	12120
12	3,0	25	11,0	36	40	85	12	3	134,60	12130	152,30	12130	134,60	12130	152,30	12130
12	4,0	25	11,0	36	40	85	12	3	134,60	12140	152,30	12140	134,60	12140	152,30	12140
16	0,3	33	15,0	48	52	100	16	3					202,20	16103	230,10	16103
16	0,5	33	15,0	48	52	100	16	3					202,20	16105	230,10	16105
16	1,0	33	15,0	48	52	100	16	3					202,20	16110	230,10	16110
16	1,5	33	15,0	48	52	100	16	3					202,20	16115	230,10	16115
16	2,0	33	15,0	48	52	100	16	3					202,20	16120	230,10	16120
16	3,0	33	15,0	48	52	100	16	3					202,20	16130	230,10	16130
16	4,0	33	15,0	48	52	100	16	3					202,20	16140	230,10	16140
20	0,5	42	19,0	60	64	114	20	3					411,40	20105	449,50	20105
20	1,0	42	19,0	60	64	114	20	3					411,40	20110	449,50	20110
20	1,5	42	19,0	60	64	114	20	3					411,40	20115	449,50	20115
20	2,0	42	19,0	60	64	114	20	3					411,40	20120	449,50	20120
20	3,0	42	19,0	60	64	114	20	3					411,40	20130	449,50	20130
20	4,0	42	19,0	60	64	114	20	3					411,40	20140	449,50	20140
P																
M																
K																
N									●		●		●		●	
S																
H																
O																

→ v_c/f_z Page 414+415

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes

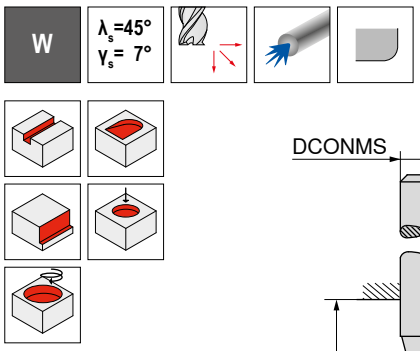

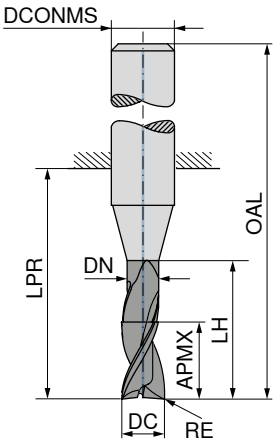

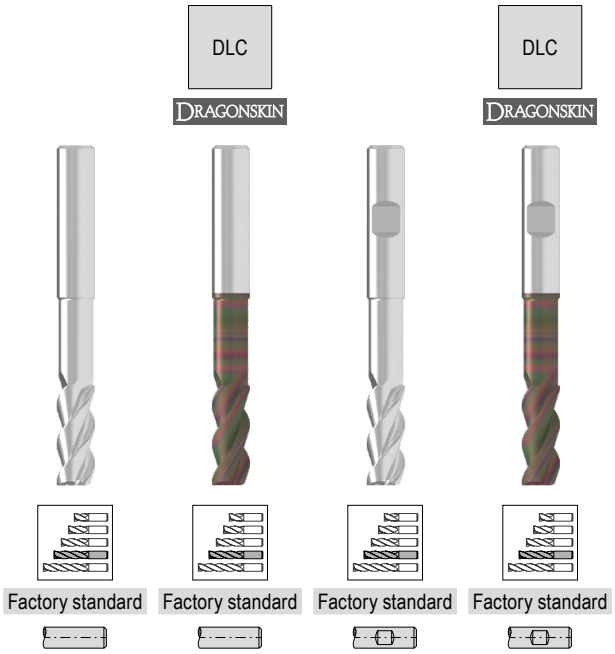

DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	Factory standard	53 712 ... EUR V1/5B	Factory standard	53 714 ... EUR V1/5B	Factory standard	53 713 ... EUR V1/5B	Factory standard	53 715 ... EUR V1/5B
mm	mm	mm	mm	mm	mm	mm	mm									
6	0,3	16	5,7	30	34	70	6	3		55,97 06203		66,03 06203		55,97 06203		66,03 06203
6	0,5	16	5,7	30	34	70	6	3		55,97 06205		66,03 06205		55,97 06205		66,03 06205
6	1,0	16	5,7	30	34	70	6	3		55,97 06210		66,03 06210		55,97 06210		66,03 06210
6	1,5	16	5,7	30	34	70	6	3		55,97 06215		66,03 06215		55,97 06215		66,03 06215
8	0,3	21	7,4	40	44	80	8	3		74,05 08203		85,41 08203		74,05 08203		85,41 08203
8	0,5	21	7,4	40	44	80	8	3		74,05 08205		85,41 08205		74,05 08205		85,41 08205
8	1,0	21	7,4	40	44	80	8	3		74,05 08210		85,41 08210		74,05 08210		85,41 08210
8	1,5	21	7,4	40	44	80	8	3		74,05 08215		85,41 08215		74,05 08215		85,41 08215
8	2,0	21	7,4	40	44	80	8	3		74,05 08220		85,41 08220		74,05 08220		85,41 08220
10	0,3	26	9,2	50	54	94	10	3		113,80 10203		126,40 10203		113,80 10203		126,40 10203
10	0,5	26	9,2	50	54	94	10	3		113,80 10205		126,40 10205		113,80 10205		126,40 10205
10	1,0	26	9,2	50	54	94	10	3		113,80 10210		126,40 10210		113,80 10210		126,40 10210
10	1,5	26	9,2	50	54	94	10	3		113,80 10215		126,40 10215		113,80 10215		126,40 10215
10	2,0	26	9,2	50	54	94	10	3		113,80 10220		126,40 10220		113,80 10220		126,40 10220
10	3,0	26	9,2	50	54	94	10	3		113,80 10230		126,40 10230		113,80 10230		126,40 10230
12	0,3	31	11,0	60	64	109	12	3		161,40 12203		179,00 12203		161,40 12203		179,00 12203
12	0,5	31	11,0	60	64	109	12	3		161,40 12205		179,00 12205		161,40 12205		179,00 12205
12	1,0	31	11,0	60	64	109	12	3		161,40 12210		179,00 12210		161,40 12210		179,00 12210
12	1,5	31	11,0	60	64	109	12	3		161,40 12215		179,00 12215		161,40 12215		179,00 12215
12	2,0	31	11,0	60	64	109	12	3		161,40 12220		179,00 12220		161,40 12220		179,00 12220
12	3,0	31	11,0	60	64	109	12	3		161,40 12230		179,00 12230		161,40 12230		179,00 12230
12	4,0	31	11,0	60	64	109	12	3		161,40 12240		179,00 12240		161,40 12240		179,00 12240
16	0,3	41	15,0	80	84	132	16	3						280,00 16203		307,70 16203
16	0,5	41	15,0	80	84	132	16	3						280,00 16205		307,70 16205
16	1,0	41	15,0	80	84	132	16	3						280,00 16210		307,70 16210
16	1,5	41	15,0	80	84	132	16	3						280,00 16215		307,70 16215
16	2,0	41	15,0	80	84	132	16	3						280,00 16220		307,70 16220
16	3,0	41	15,0	80	84	132	16	3						280,00 16230		307,70 16230
16	4,0	41	15,0	80	84	132	16	3						280,00 16240		307,70 16240
20	0,5	52	19,0	100	104	154	20	3						441,20 20205		479,20 20205
20	1,0	52	19,0	100	104	154	20	3						441,20 20210		479,20 20210
20	1,5	52	19,0	100	104	154	20	3						441,20 20215		479,20 20215
20	2,0	52	19,0	100	104	154	20	3						441,20 20220		479,20 20220
20	3,0	52	19,0	100	104	154	20	3						441,20 20230		479,20 20230
20	4,0	52	19,0	100	104	154	20	3						441,20 20240		479,20 20240
P																
M																
K																
N										●		●		●		●
S																
H																
O																

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter with corner radius

The specialist for machining non-ferrous metals

▲ With polished chip flutes

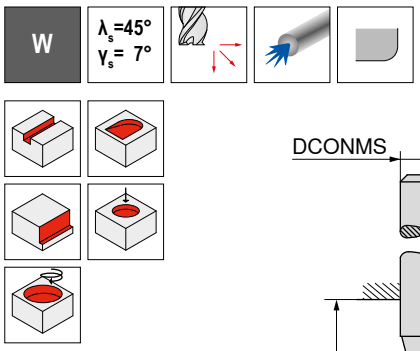

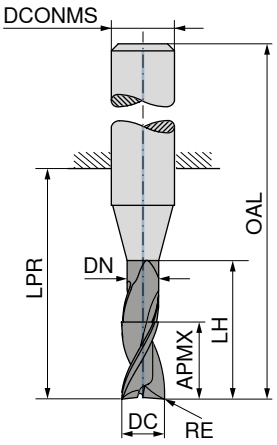

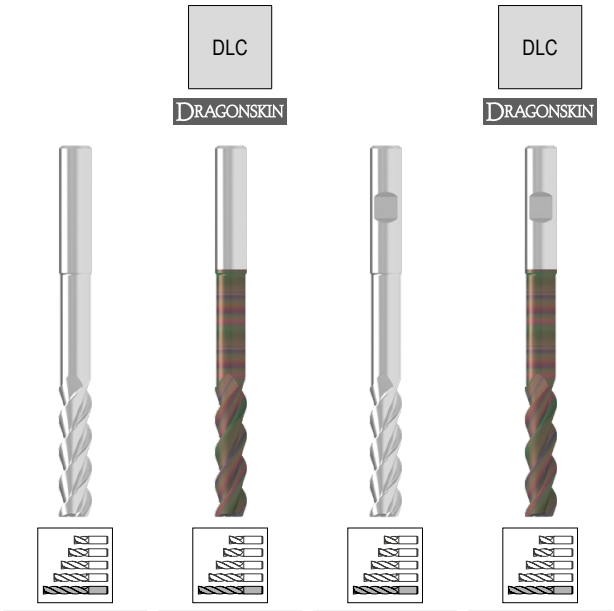

									Factory standard	Factory standard	Factory standard	Factory standard
									53 712 ...	53 714 ...	53 713 ...	53 715 ...
DC h6	RE ±0,01	APMX	DN	LH	LPR	OAL	DCONMS h5	ZEFP	EUR V1/5B	EUR V1/5B	EUR V1/5B	EUR V1/5B
mm	mm	mm	mm	mm	mm	mm	mm					
6	0,3	25	5,7	48	52	88	6	3	69,95 06403	80,04 06403	69,95 06403	80,04 06403
6	0,5	25	5,7	48	52	88	6	3	69,95 06405	80,04 06405	69,95 06405	80,04 06405
6	1,0	25	5,7	48	52	88	6	3	69,95 06410	80,04 06410	69,95 06410	80,04 06410
6	1,5	25	5,7	48	52	88	6	3	69,95 06415	80,04 06415	69,95 06415	80,04 06415
8	0,3	33	7,4	64	68	104	8	3	92,56 08403	103,90 08403	92,56 08403	103,90 08403
8	0,5	33	7,4	64	68	104	8	3	92,56 08405	103,90 08405	92,56 08405	103,90 08405
8	1,0	33	7,4	64	68	104	8	3	92,56 08410	103,90 08410	92,56 08410	103,90 08410
8	1,5	33	7,4	64	68	104	8	3	92,56 08415	103,90 08415	92,56 08415	103,90 08415
8	2,0	33	7,4	64	68	104	8	3	92,56 08420	103,90 08420	92,56 08420	103,90 08420
10	0,3	41	9,2	80	84	124	10	3	142,30 10403	154,80 10403	142,30 10403	154,80 10403
10	0,5	41	9,2	80	84	124	10	3	142,30 10405	154,80 10405	142,30 10405	154,80 10405
10	1,0	41	9,2	80	84	124	10	3	142,30 10410	154,80 10410	142,30 10410	154,80 10410
10	1,5	41	9,2	80	84	124	10	3	142,30 10415	154,80 10415	142,30 10415	154,80 10415
10	2,0	41	9,2	80	84	124	10	3	142,30 10420	154,80 10420	142,30 10420	154,80 10420
10	3,0	41	9,2	80	84	124	10	3	142,30 10430	154,80 10430	142,30 10430	154,80 10430
12	0,3	49	11,0	96	100	145	12	3	201,80 12403	219,40 12403	201,80 12403	219,40 12403
12	0,5	49	11,0	96	100	145	12	3	201,80 12405	219,40 12405	201,80 12405	219,40 12405
12	1,0	49	11,0	96	100	145	12	3	201,80 12410	219,40 12410	201,80 12410	219,40 12410
12	1,5	49	11,0	96	100	145	12	3	201,80 12415	219,40 12415	201,80 12415	219,40 12415
12	2,0	49	11,0	96	100	145	12	3	201,80 12420	219,40 12420	201,80 12420	219,40 12420
12	3,0	49	11,0	96	100	145	12	3	201,80 12430	219,40 12430	201,80 12430	219,40 12430
12	4,0	49	11,0	96	100	145	12	3	201,80 12440	219,40 12440	201,80 12440	219,40 12440
16	0,3	65	15,0	128	132	180	16	3			521,20 16403	549,00 16403
16	0,5	65	15,0	128	132	180	16	3			521,20 16405	549,00 16405
16	1,0	65	15,0	128	132	180	16	3			521,20 16410	549,00 16410
16	1,5	65	15,0	128	132	180	16	3			521,20 16415	549,00 16415
16	2,0	65	15,0	128	132	180	16	3			521,20 16420	549,00 16420
16	3,0	65	15,0	128	132	180	16	3			521,20 16430	549,00 16430
16	4,0	65	15,0	128	132	180	16	3			521,20 16440	549,00 16440
20	0,5	82	19,0	160	164	214	20	3			792,20 20405	830,30 20405
20	1,0	82	19,0	160	164	214	20	3			792,20 20410	830,30 20410
20	1,5	82	19,0	160	164	214	20	3			792,20 20415	830,30 20415
20	2,0	82	19,0	160	164	214	20	3			792,20 20420	830,30 20420
20	3,0	82	19,0	160	164	214	20	3			792,20 20430	830,30 20430
20	4,0	82	19,0	160	164	214	20	3			792,20 20440	830,30 20440

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





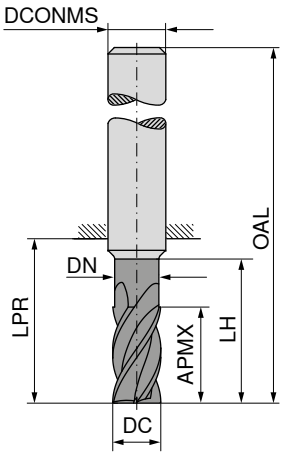

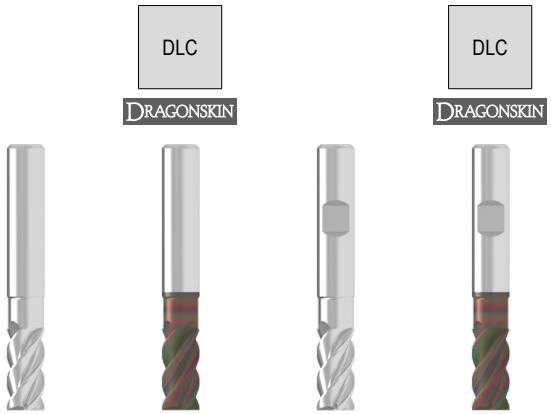

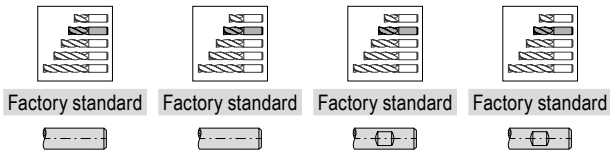

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 704 ... Factory standard EUR V1/5B		53 706 ... Factory standard EUR V1/5B		53 705 ... Factory standard EUR V1/5B		53 707 ... Factory standard EUR V1/5B	
5	10,5	4,8	15	22	58	6	4	40,46	**05100**	51,16	**05100**	40,46	**05100**	51,16	**05100**
6	13,0	5,8	18	22	58	6	4	41,19	**06100**	51,28	**06100**	41,19	**06100**	51,28	**06100**
8	17,0	7,7	24	28	64	8	4	58,62	**08100**	69,98	**08100**	58,62	**08100**	69,98	**08100**
10	21,0	9,7	30	34	74	10	4	77,24	**10100**	89,87	**10100**	77,24	**10100**	89,87	**10100**
12	25,0	11,6	36	40	85	12	4	118,90	**12100**	136,60	**12100**	118,90	**12100**	136,60	**12100**
14	29,0	13,6	42	46	91	14	4					137,70	**14100**	161,60	**14100**
16	33,0	15,5	48	52	100	16	4					217,70	**16100**	245,30	**16100**
18	38,0	17,5	54	58	106	18	4					234,60	**18100**	265,00	**18100**
20	42,0	19,5	60	64	114	20	4					399,80	**20100**	437,90	**20100**
P															
M															
K															
N								●		●		●		●	
S															
H															
O															

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





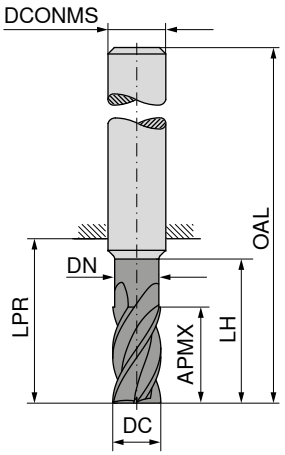

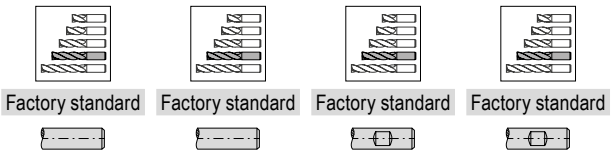

Factory standard | Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 704 ... EUR V1/5B		53 706 ... EUR V1/5B		53 705 ... EUR V1/5B		53 707 ... EUR V1/5B	
2	5,5	1,8	10	19	55	6	4	32,35	**02200**	41,93	**02200**	32,35	**02200**	41,93	**02200**
3	8,0	2,8	15	22	58	6	4	42,59	**03200**	51,84	**03200**	42,59	**03200**	51,84	**03200**
4	10,5	3,8	20	26	62	6	4	40,83	**04200**	50,15	**04200**	40,83	**04200**	50,15	**04200**
5	13,0	4,8	25	34	70	6	4	39,43	**05200**	49,56	**05200**	39,43	**05200**	49,56	**05200**
6	16,0	5,8	30	34	70	6	4	41,19	**06200**	51,28	**06200**	41,19	**06200**	51,28	**06200**
8	21,0	7,7	40	44	80	8	4	58,62	**08200**	69,98	**08200**	58,62	**08200**	69,98	**08200**
10	26,0	9,7	50	54	94	10	4	77,24	**10200**	89,87	**10200**	77,24	**10200**	89,87	**10200**
12	31,0	11,6	60	64	109	12	4	118,90	**12200**	136,60	**12200**	118,90	**12200**	136,60	**12200**
14	36,0	13,6	70	74	119	14	4					144,00	**14200**	167,60	**14200**
16	41,0	15,5	80	84	132	16	4					217,70	**16200**	245,30	**16200**
18	47,0	17,5	90	94	142	18	4					234,60	**18200**	265,00	**18200**
20	52,0	19,5	100	104	154	20	4					399,80	**20200**	437,90	**20200**

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





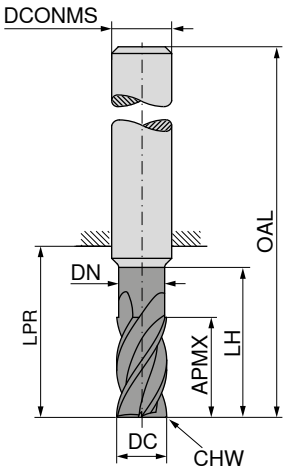

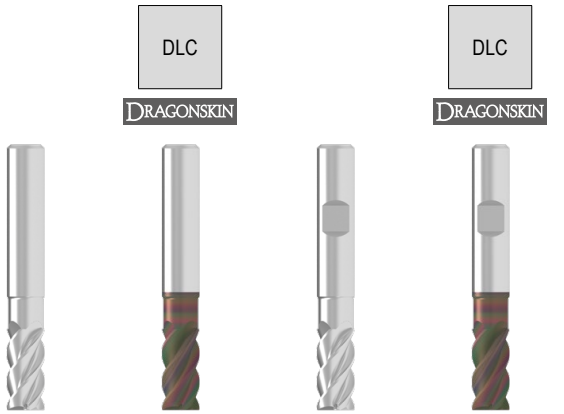

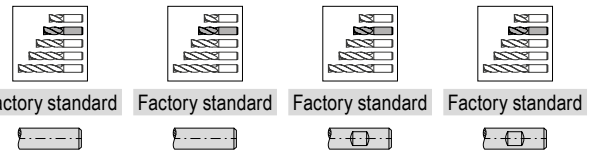

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 700 ... EUR V1/5B		53 702 ... EUR V1/5B		53 701 ... EUR V1/5B		53 703 ... EUR V1/5B	
									Factory standard		Factory standard		Factory standard		Factory standard	
5	10,5	4,8	15	22	58	6	0,1	4	40,46	**05100**	51,16	**05100**	40,46	**05100**	51,16	**05100**
6	13,0	5,8	18	22	58	6	0,2	4	41,19	**06100**	51,28	**06100**	41,19	**06100**	51,28	**06100**
8	17,0	7,7	24	28	64	8	0,2	4	58,62	**08100**	69,98	**08100**	58,62	**08100**	69,98	**08100**
10	21,0	9,7	30	34	74	10	0,2	4	77,24	**10100**	89,87	**10100**	77,24	**10100**	89,87	**10100**
12	25,0	11,6	36	40	85	12	0,2	4	118,90	**12100**	136,60	**12100**	118,90	**12100**	136,60	**12100**
14	29,0	13,6	42	46	91	14	0,2	4					137,70	**14100**	161,60	**14100**
16	33,0	15,5	48	52	100	16	0,2	4					217,70	**16100**	245,30	**16100**
18	38,0	17,5	54	58	106	18	0,2	4					234,60	**18100**	265,00	**18100**
20	42,0	19,5	60	64	114	20	0,2	4					399,80	**20100**	437,90	**20100**
P																
M																
K																
N									●		●		●		●	
S																
H																
O																

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





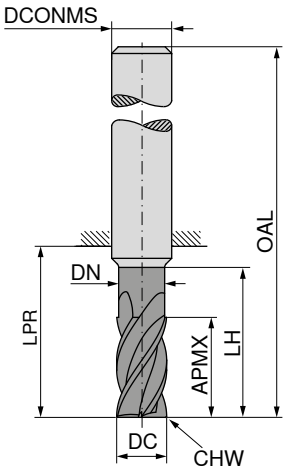

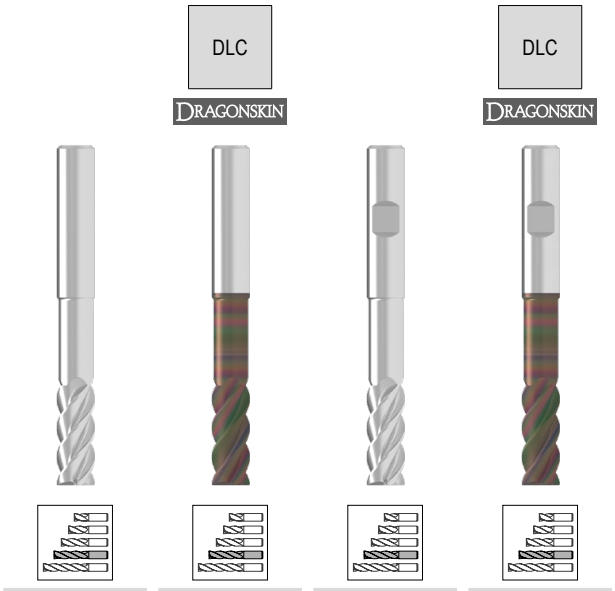

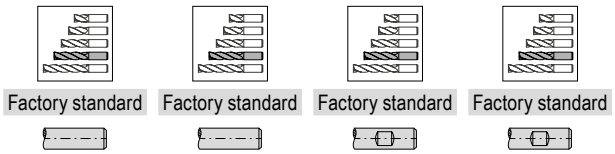

Factory standard | Factory standard | Factory standard | Factory standard

DC h6	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 700 ... EUR V1/5B		53 702 ... EUR V1/5B		53 701 ... EUR V1/5B		53 703 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm	mm									
2	5,5	1,8	10	19	55	6	0,05	4	32,35	02200	41,06	02200	32,35	02200	41,06	02200
3	8,0	2,8	15	22	58	6	0,10	4	42,59	03200	51,28	03200	42,59	03200	51,28	03200
4	10,5	3,8	20	26	62	6	0,10	4	40,83	04200	49,56	04200	40,83	04200	49,56	04200
5	13,0	4,8	25	34	70	6	0,10	4	39,43	05200	49,56	05200	39,43	05200	49,56	05200
6	16,0	5,8	30	34	70	6	0,20	4	41,19	06200	51,28	06200	41,19	06200	51,28	06200
8	21,0	7,7	40	44	80	8	0,20	4	58,62	08200	69,98	08200	58,62	08200	69,98	08200
10	26,0	9,7	50	54	94	10	0,20	4	77,24	10200	89,87	10200	77,24	10200	89,87	10200
12	31,0	11,6	60	64	109	12	0,20	4	118,90	12200	136,60	12200	118,90	12200	136,60	12200
14	36,0	13,6	70	74	119	14	0,20	4					144,00	14200	167,60	14200
16	41,0	15,5	80	84	132	16	0,20	4					217,70	16200	245,30	16200
18	47,0	17,5	90	94	142	18	0,20	4					234,60	18200	265,00	18200
20	52,0	19,5	100	104	154	20	0,20	4					399,80	20200	437,90	20200

P				
M				
K				
N	●	●	●	●
S				
H				
O				

→ v_c/f_z Page 414+415

AluLine – End milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes





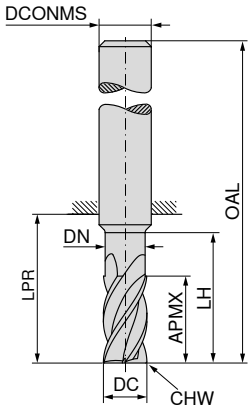

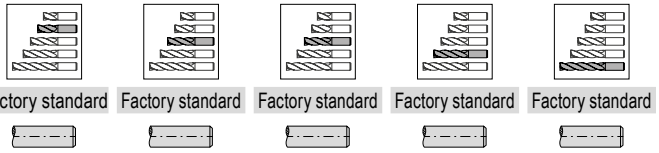

Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 560 ... EUR V1/5B		53 561 ... EUR V1/5B		53 562 ... EUR V1/5B		53 563 ... EUR V1/5B		53 564 ... EUR V1/5B	
3,0	8	2,7	13	21	57	6	0,1	4							38,68	**030**		
3,5	11	3,2	17	21	57	6	0,1	4							43,17	**035**		
4,0	11	3,7	17	21	57	6	0,1	4							43,17	**040**		
4,5	13	4,2	19	21	57	6	0,1	4							45,64	**045**		
5,0	13	4,7	19	21	57	6	0,1	4					42,28	**050**				
5,5	13	5,2	19	21	57	6	0,1	4					41,73	**055**				
6,0	10	5,7	42	44	80	6	0,2	4									44,64	**060**
6,0	13	5,7	19	21	57	6	0,2	4					44,64	**060**				
6,0	18	5,7	24	26	62	6	0,2	4							44,64	**060**		
6,5	21	6,1	25	27	63	8	0,2	4					59,81	**065**				
8,0	13	7,4	62	64	100	8	0,2	4									63,60	**080**
8,0	21	7,4	25	27	63	8	0,2	4			63,60	**080**						
8,0	24	7,4	30	32	68	8	0,2	4					63,60	**080**				
8,5	22	7,9	30	32	72	10	0,2	4					79,97	**085**				
10,0	16	9,2	58	60	100	10	0,2	4							83,74	**100**		
10,0	22	9,2	30	32	72	10	0,2	4			83,74	**100**						
10,0	30	9,2	38	40	80	10	0,2	4					83,74	**100**				
12,0	19	11,0	73	75	120	12	0,2	4									128,80	**120**
12,0	26	11,0	36	38	83	12	0,2	4			128,80	**120**						
12,0	36	11,0	46	48	93	12	0,2	4					128,80	**120**				
14,0	26	13,0	36	38	83	14	0,2	4	149,30	**140**								
16,0	25	15,0	100	102	150	16	0,2	4									236,10	**160**
16,0	36	15,0	42	44	92	16	0,2	4	236,10	**160**								
16,0	48	15,0	58	60	108	16	0,2	4					236,10	**160**				
18,0	36	17,0	42	44	92	18	0,2	4	253,30	**180**								
20,0	32	19,0	98	100	150	20	0,2	4							433,20	**200**		
20,0	41	19,0	52	54	104	20	0,2	4	433,20	**200**								
20,0	60	19,0	74	76	126	20	0,2	4					433,20	**200**				
25,0	52	24,0	62	65	121	25	0,3	4	566,40	**250**								

P						
M						
K						
N	●	●	●	●	●	
S						
H						
O						

→ v_c/f_z Page 414+415

14

AluLine – End milling cutter

The specialist for machining non-ferrous metals



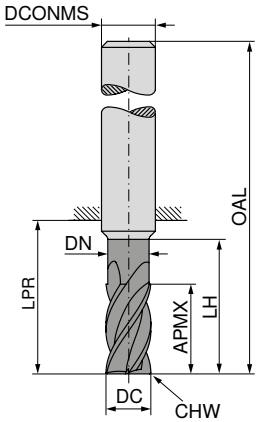

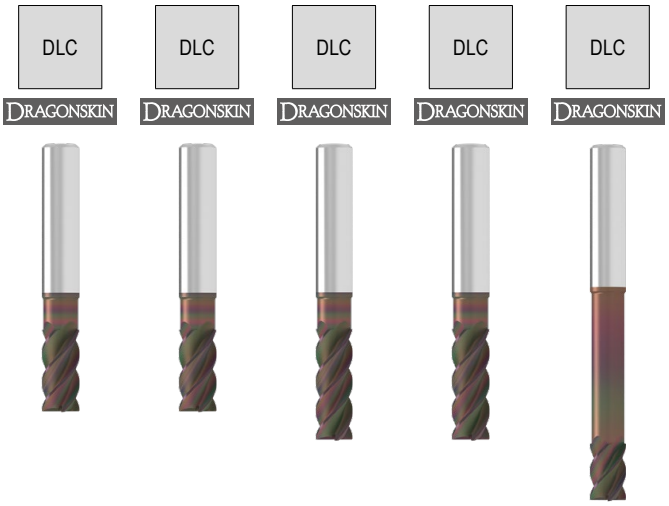

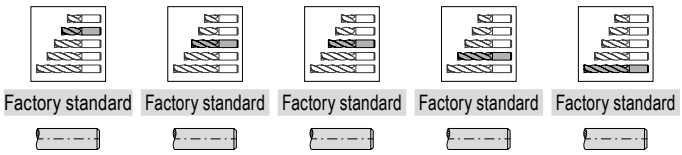

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	53 565 ... EUR V1/5B		53 566 ... EUR V1/5B		53 567 ... EUR V1/5B		53 568 ... EUR V1/5B		53 569 ... EUR V1/5B	
3,0	8	2,7	13	21	57	6	0,1	4							51,57	**030**		
3,5	11	3,2	17	21	57	6	0,1	4							55,91	**035**		
4,0	11	3,7	17	21	57	6	0,1	4							55,91	**040**		
4,5	13	4,2	19	21	57	6	0,1	4							58,54	**045**		
5,0	13	4,7	19	21	57	6	0,1	4					55,18	**050**				
5,5	13	5,2	19	21	57	6	0,1	4					54,45	**055**				
6,0	10	5,7	42	44	80	6	0,2	4									57,34	**060**
6,0	13	5,7	19	21	57	6	0,2	4					57,34	**060**				
6,0	18	5,7	24	26	62	6	0,2	4							57,34	**060**		
6,5	21	6,1	25	27	63	8	0,2	4					72,57	**065**				
8,0	13	7,4	62	64	100	8	0,2	4									76,32	**080**
8,0	21	7,4	25	27	63	8	0,2	4			76,32	**080**						
8,0	24	7,2	30	32	68	8	0,2	4					76,32	**080**				
8,5	22	7,9	30	32	72	10	0,2	4					92,72	**085**				
10,0	16	9,2	58	60	100	10	0,2	4							96,47	**100**		
10,0	22	9,2	30	32	72	10	0,2	4			96,47	**100**						
10,0	30	9,2	38	40	80	10	0,2	4					96,47	**100**				
12,0	19	11,0	73	75	120	12	0,2	4									141,50	**120**
12,0	26	11,0	36	38	83	12	0,2	4			141,50	**120**						
12,0	36	11,0	46	48	93	12	0,2	4					141,50	**120**				
14,0	26	13,0	36	38	83	14	0,2	4	162,40	**140**								
16,0	25	15,0	100	102	150	16	0,2	4									249,20	**160**
16,0	36	15,0	42	44	92	16	0,2	4	249,20	**160**								
16,0	48	15,0	58	60	108	16	0,2	4					249,20	**160**				
18,0	36	17,0	42	44	92	18	0,2	4	266,50	**180**								
20,0	32	19,0	98	100	150	20	0,2	4							444,60	**200**		
20,0	41	19,0	52	54	104	20	0,2	4	444,60	**200**								
20,0	60	19,0	74	76	126	20	0,2	4					444,60	**200**				
25,0	52	24,0	62	65	121	25	0,3	4	580,80	**250**								
P																		
M																		
K																		
N									●		●		●		●		●	
S																		
H																		
O																		

→ v_c/f_z Page 414+415

AluLine – Roughing-Finishing Cutter

The specialist for machining non-ferrous metals

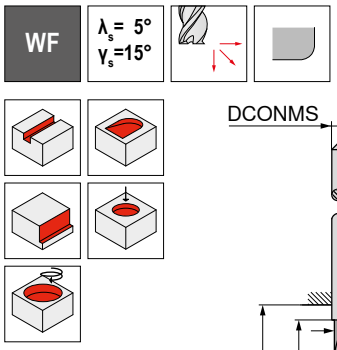

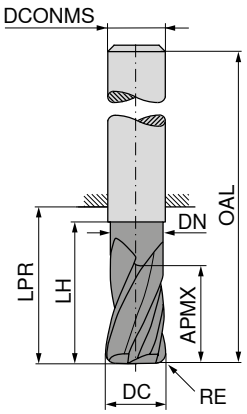

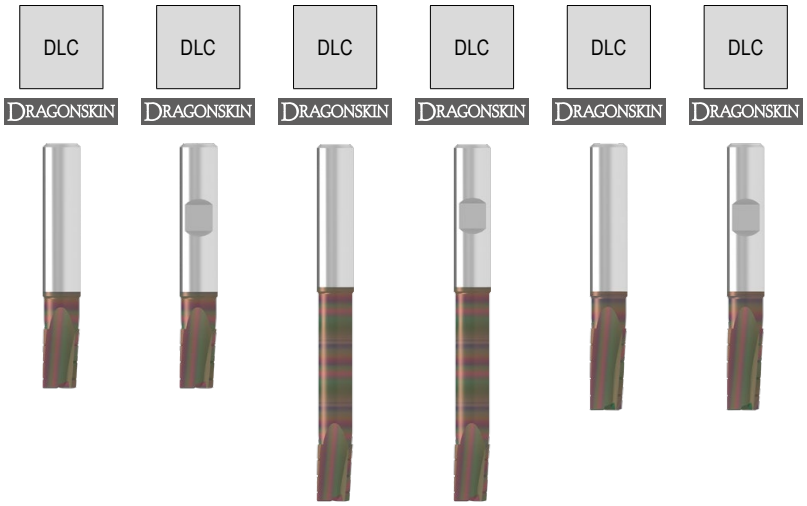

Factory standard

DC e8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 582 ... EUR V1/5B		53 583 ... EUR V1/5B		53 582 ... EUR V1/5B		53 583 ... EUR V1/5B		53 582 ... EUR V1/5B		53 583 ... EUR V1/5B	
3	0,10	5	2,7	18	44	80	6	3					54,51	03301	54,51	03301				
4	0,10	7	3,7	24	44	80	6	3					56,35	04301	56,35	04301				
5	0,15	8	4,7	16	18	54	6	3	47,63	05101	47,63	05101								
5	0,15	8	4,7	30	44	80	6	3					59,33	05301	59,33	05301				
5	0,15	13	4,7	18	21	57	6	3									47,63	05201	47,63	05201
6	0,20	10	5,7	17	18	54	6	3	47,63	06102	47,63	06102								
6	0,20	10	5,7	42	44	80	6	3					64,75	06302	64,75	06302				
6	0,20	13	5,7	18	21	57	6	3									47,63	06202	47,63	06202
8	0,25	13	7,4	20	22	58	8	3	55,39	08103	55,39	08103								
8	0,25	13	7,4	62	64	100	8	3					71,05	08303	71,05	08303				
8	0,25	21	7,4	25	27	63	8	3									58,55	08203	58,55	08203
10	0,30	16	9,2	24	26	66	10	3	75,99	10103	75,99	10103								
10	0,30	16	9,2	58	60	100	10	3					100,20	10303	100,20	10303				
10	0,30	22	9,2	30	32	72	10	3									80,57	10203	80,57	10203
12	0,35	19	11,0	26	28	73	12	3	104,70	12104	104,70	12104								
12	0,35	19	11,0	73	75	120	12	3					128,60	12304	128,60	12304				
12	0,35	26	11,0	36	38	83	12	3									108,70	12204	108,70	12204
16	0,50	25	15,0	32	34	82	16	3			175,50	16105								
16	0,50	25	15,0	100	102	150	16	3							216,00	16305				
16	0,50	36	15,0	42	44	92	16	3											183,80	16205
20	0,60	32	19,0	40	42	92	20	3			293,80	20106								
20	0,60	32	19,0	100	100	150	20	3							320,70	20306				
20	0,60	41	19,0	52	54	104	20	3											314,40	20206

P																				
M																				
K																				
N									●		●		●		●		●		●	
S																				
H																				
O																				

→ v_c/f_z Page 416+417

14

AluLine – Rough milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

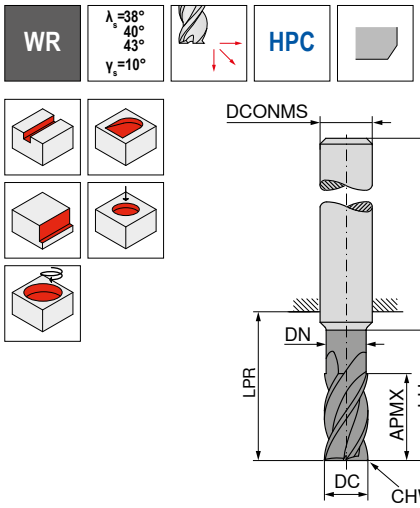

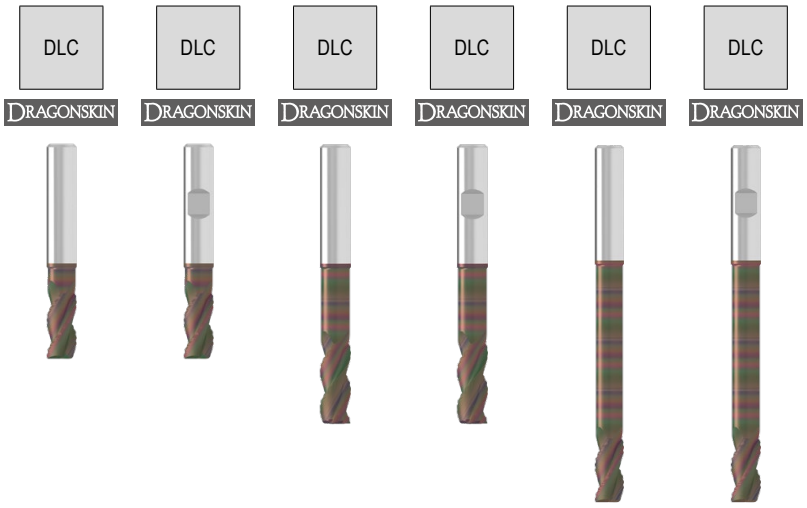



DC d11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	53 578 ...		53 579 ...		53 578 ...		53 579 ...		53 578 ...		53 579 ...	
mm	mm	mm	mm	mm	mm	mm	mm		EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B	
6	13	5,8	18	22	58	6	0,4	3	44,45	**06100**	44,45	**06100**								
6	16	5,8	30	34	70	6	0,4	3					47,50	**06200**	47,50	**06200**				
6	13	5,8	48	52	88	6	0,4	3									51,88	**06400**	51,88	**06400**
8	17	7,7	24	28	64	8	0,4	3	54,51	**08100**	54,51	**08100**								
8	21	7,7	40	44	80	8	0,4	3					64,85	**08200**	64,85	**08200**				
8	17	7,7	65	68	104	8	0,4	3									72,24	**08400**	72,24	**08400**
10	21	9,7	30	34	74	10	0,4	3	69,10	**10100**	69,10	**10100**								
10	26	9,7	50	54	94	10	0,4	3					89,38	**10200**	89,38	**10200**				
10	21	9,7	80	84	124	10	0,4	3									102,30	**10400**	102,30	**10400**
12	25	11,6	36	40	85	12	0,4	3	89,08	**12100**	89,08	**12100**								
12	31	11,6	60	64	109	12	0,4	3					127,80	**12200**	127,80	**12200**				
12	25	11,6	96	100	145	12	0,4	3									144,20	**12400**	144,20	**12400**
16	33	15,5	48	52	100	16	0,4	3			139,30	**16100**								
16	41	15,5	80	84	132	16	0,4	3							225,40	**16200**				
16	33	15,5	128	132	180	16	0,4	3											293,70	**16400**
20	42	19,5	60	64	114	20	0,4	3			212,30	**20100**								
20	52	19,5	100	104	154	20	0,4	3							365,30	**20200**				
20	42	19,5	160	164	214	20	0,4	3											484,90	**20400**

P																				
M																				
K																				
N									●		●		●		●		●		●	
S																				
H																				
O																				

→ v_c/f_z Page 414+415

AluLine – Rough milling cutter

The specialist for machining non-ferrous metals

▲ With polished chip flutes

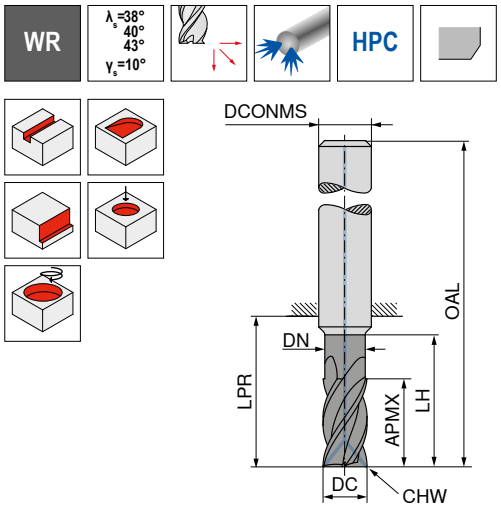

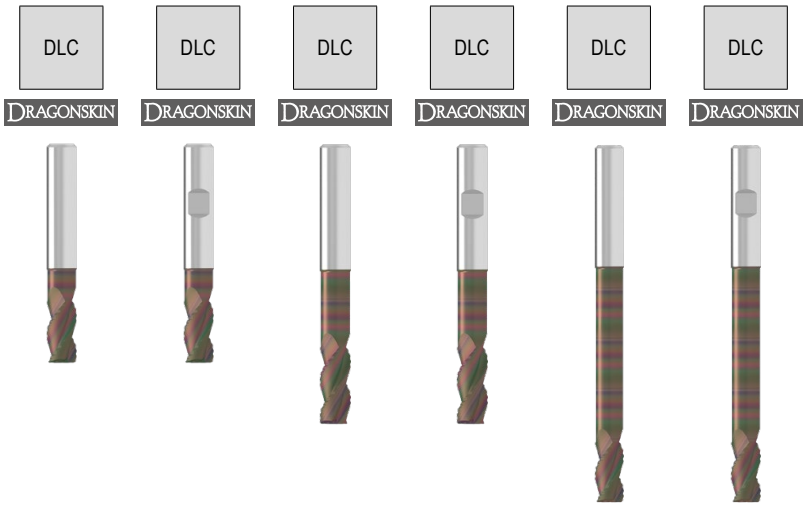

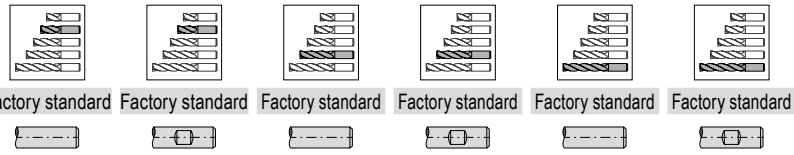

DC $_{d11}$	APMX	DN	LH	LPR	OAL	DCONMS $_{h6}$	CHW	ZEFP	53 580 ... EUR V1/5B		53 581 ... EUR V1/5B		53 580 ... EUR V1/5B		53 581 ... EUR V1/5B		53 580 ... EUR V1/5B		53 581 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm	mm													
6	13	5,8	18	22	58	6	0,4	3	56,07	**06100**	56,07	**06100**								
6	16	5,8	30	34	70	6	0,4	3					63,57	**06200**	63,57	**06200**				
6	13	5,8	48	52	88	6	0,4	3									72,36	**06400**	72,36	**06400**
8	17	7,7	24	28	64	8	0,4	3	72,19	**08100**	72,19	**08100**								
8	21	7,7	40	44	80	8	0,4	3					82,74	**08200**	82,74	**08200**				
8	17	7,7	64	68	104	8	0,4	3									96,21	**08400**	96,21	**08400**
10	21	9,7	30	34	74	10	0,4	3	98,09	**10100**	98,09	**10100**								
10	26	9,7	50	54	94	10	0,4	3					119,30	**10200**	119,30	**10200**				
10	21	9,7	80	84	124	10	0,4	3									155,70	**10400**	155,70	**10400**
12	25	11,6	36	40	85	12	0,4	3	146,10	**12100**	146,10	**12100**								
12	31	11,6	60	64	109	12	0,4	3					149,60	**12200**	149,60	**12200**				
12	25	11,6	96	100	145	12	0,4	3									193,90	**12400**	193,90	**12400**
16	33	15,5	48	52	100	16	0,4	3			225,70	**16100**								
16	41	15,5	80	84	132	16	0,4	3							309,70	**16200**				
16	33	15,5	128	132	180	16	0,4	3											539,60	**16400**
20	42	19,5	60	64	114	20	0,4	3			459,00	**20100**								
20	52	19,5	100	104	154	20	0,4	3							466,10	**20200**				
20	42	19,5	160	164	214	20	0,4	3											824,00	**20400**

P						
M						
K						
N	●	●	●	●	●	●
S						
H						
O						

→ v_c/f_z Page 414+415

AluLine – High Accuracy Finish Milling Cutter

The specialist for machining non-ferrous metals

▲ max. taper of 0.003 mm for high precision and parallelism of vertical walls
▲ Tool with cutting edge correction

W | λ_s=44° γ_s=20° | HPC

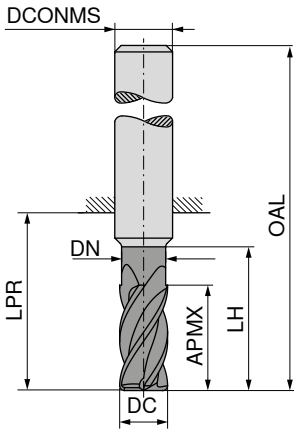

Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 639 ... EUR V1/5B		53 639 ... EUR V1/5B		53 639 ... EUR V1/5B	
6	16	5,7	20	22	58	6	6	72,56	**06100**				
6	16	5,7	42	44	80	6	6					84,85	**06400**
8	19	7,4	26	28	64	8	6	80,17	**08100**				
8	19	7,4	62	64	100	8	6					95,22	**08400**
10	25	9,2	32	34	74	10	6	104,50	**10100**				
10	25	9,2	58	60	100	10	6					150,20	**10400**
12	30	11,0	37	39	84	12	6	128,90	**12100**				
12	30	11,0	73	75	120	12	6					193,60	**12400**
12	45			75	120	12	6			121,70	**12200**		
16	40	15,0	44	45	93	16	6	258,40	**16100**				
16	40	15,0	100	102	150	16	6					394,30	**16400**
16	65			102	150	16	6			209,20	**16200**		
20	50	19,0	53	54	104	20	6	372,50	**20100**				
20	50	19,0	98	100	150	20	6					487,20	**20400**
20	75			100	150	20	6			449,20	**20200**		
P													
M													
K													
N								●		●		●	
S													
H													
O													

→ v_c/f_z Page 416+417

AluLine – Ball Nosed Cutter

The specialist for machining non-ferrous metals

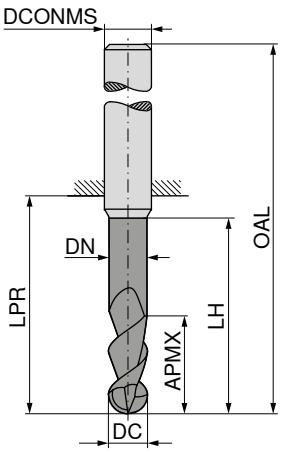

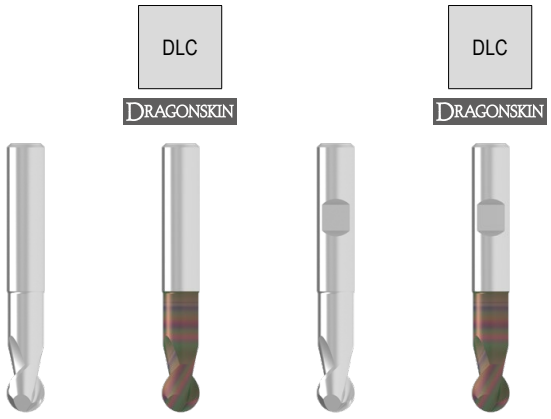

	Factory standard	Factory standard	Factory standard	Factory standard
	53 607 ...	53 608 ...	53 609 ...	53 610 ...

DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR V1/5B		EUR V1/5B		EUR V1/5B		EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm									
3	6	2,7	16	22	50	3	2	32,91	**03100**	41,63	**03100**				
4	7	3,7	17	26	54	4	2	40,93	**04100**	49,63	**04100**				
5	8	4,6	18	26	54	5	2	46,80	**05100**	56,92	**05100**				
6	10	5,5	21	26	62	6	2	45,50	**06100**	55,63	**06100**	45,50	**06100**	55,63	**06100**
8	12	7,5	27	31	67	8	2	60,50	**08100**	71,86	**08100**	60,50	**08100**	71,86	**08100**
10	13	9,4	32	34	74	10	2	82,27	**10100**	94,92	**10100**	82,27	**10100**	94,92	**10100**
12	16	11,4	38	48	93	12	2	113,30	**12100**	130,90	**12100**	113,30	**12100**	130,90	**12100**
14	16	13,2	38	55	100	14	2	142,80	**14100**	166,50	**14100**	142,80	**14100**	166,50	**14100**
16	20	15,0	44	52	100	16	2	188,00	**16100**	215,80	**16100**	188,00	**16100**	215,80	**16100**
20	25	19,0	50	54	104	20	2	265,10	**20100**	303,00	**20100**	265,10	**20100**	303,00	**20100**

P				
M				
K				
N	●	●	●	●
S				
H				
O	○	○	○	○

→ v_c/f_z Page 416+417

14

AluLine – Ball Nosed Cutter

The specialist for machining non-ferrous metals

W | λ_s=45° γ_s=13°

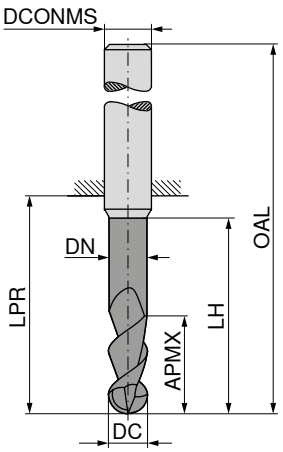

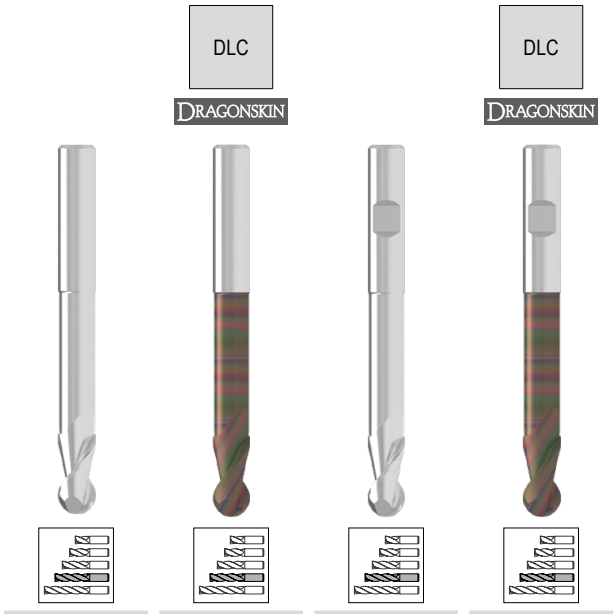

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 607 ... EUR V1/5B		53 608 ... EUR V1/5B		53 609 ... EUR V1/5B		53 610 ... EUR V1/5B	
3	10	2,7	32	47	75	3	2	39,50	**03200**	49,61	**03200**				
4	13	3,7	36	47	75	4	2	49,13	**04200**	59,22	**04200**				
5	15	4,6	40	47	75	5	2	56,15	**05200**	67,54	**05200**				
6	16	5,5	44	64	100	6	2	54,62	**06200**	65,97	**06200**	54,62	**06200**	65,97	**06200**
8	22	7,5	54	64	100	8	2	72,62	**08200**	83,99	**08200**	72,62	**08200**	83,99	**08200**
10	25	9,4	60	61	101	10	2	98,71	**10200**	111,30	**10200**	98,71	**10200**	111,30	**10200**
12	26	11,4	60	63	108	12	2	136,10	**12200**	153,70	**12200**	136,10	**12200**	153,70	**12200**
14	26	13,2	60	65	110	14	2	171,40	**14200**	195,00	**14200**	171,40	**14200**	195,00	**14200**
16	30	15,0	92	102	150	16	2	263,10	**16200**	291,00	**16200**	263,10	**16200**	291,00	**16200**
20	40	19,0	92	100	150	20	2	318,10	**20200**	356,10	**20200**	318,10	**20200**	356,10	**20200**

P				
M				
K				
N	●	●	●	●
S				
H				
O	○	○	○	○

→ v_c/f_z Page 416+417

AluLine – Ball Nosed Cutter

The specialist for machining non-ferrous metals

W | λ_s=45° γ_s=13°

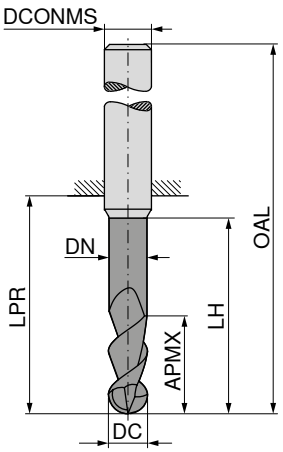

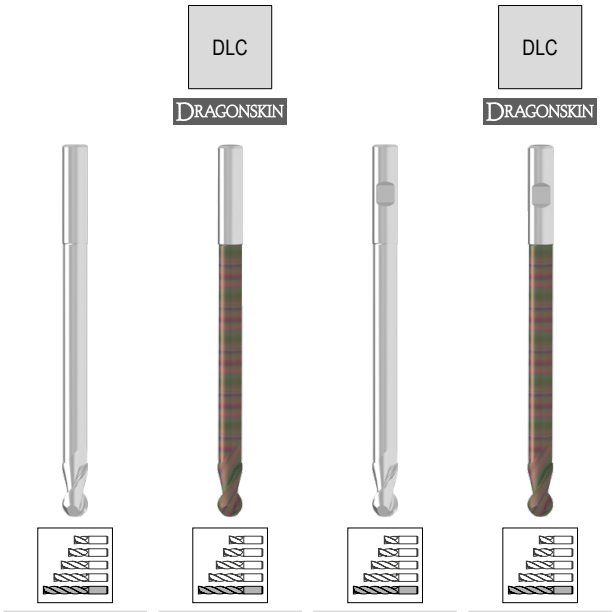

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	53 607 ... EUR V1/5B		53 608 ... EUR V1/5B		53 609 ... EUR V1/5B		53 610 ... EUR V1/5B	
3	10	2,7	82	97	125	3	2	52,67	**03400**	61,41	**03400**				
4	13	3,7	86	97	125	4	2	65,52	**04400**	74,20	**04400**				
6	16	5,5	94	114	150	6	2	74,85	**06400**	84,98	**06400**	74,85	**06400**	84,98	**06400**
8	22	7,5	104	114	150	8	2	72,84	**08400**	84,19	**08400**	72,84	**08400**	84,19	**08400**
10	25	9,4	110	111	151	10	2	131,60	**10400**	144,20	**10400**	131,60	**10400**	144,20	**10400**
12	26	11,4	105	106	151	12	2	181,30	**12400**	199,00	**12400**	181,30	**12400**	199,00	**12400**
16	30	15,0	192	202	250	16	2	375,90	**16400**	404,60	**16400**	375,90	**16400**	404,60	**16400**

P				
M				
K				
N	●	●	●	●
S				
H				
O	○	○	○	○

→ v_c/f_z Page 416+417

14

AluLine – NC deburring cutter

The specialist for machining non-ferrous metals

▲ Point angle α = 60°

W

λ_s=0°
γ_s=8°



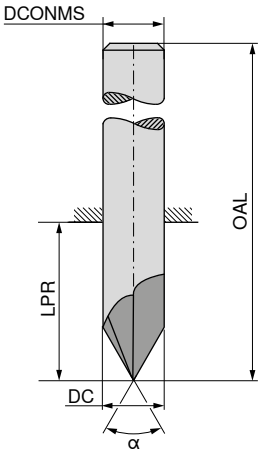

DLC
DRAGONSKIN

DLC
DRAGONSKIN

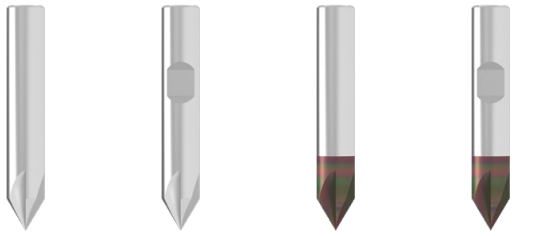

DC	OAL	LPR	DCONMS	ZEFP	α = 60° Factory standard		α = 60° Factory standard		α = 60° Factory standard		α = 60° Factory standard	
					53 666 ...		53 667 ...		53 662 ...		53 663 ...	
mm	mm	mm	mm		EUR V1		EUR V1		EUR V1		EUR V1	
4	50	22	4	4	39,99	**04000**			46,84	**04000**		
6	55	19	6	4	44,64	**06000**	44,64	**06000**	51,50	**06000**	51,50	**06000**
8	58	22	8	4	52,14	**08000**	52,14	**08000**	59,89	**08000**	59,89	**08000**
10	60	20	10	4	73,65	**10000**	73,65	**10000**	82,95	**10000**	82,95	**10000**
12	70	25	12	4	82,95	**12000**	82,95	**12000**	93,56	**12000**	93,56	**12000**
16	80	32	16	4	138,20	**16000**	138,20	**16000**	152,50	**16000**	152,50	**16000**

P				
M				
K				
N	●	●	●	●
S				
H				
O	●	●	●	●

→ v_c/f_z Page 419

AluLine – NC deburring cutter

The specialist for machining non-ferrous metals

▲ Point angle α = 90°

W

λ_s=0°
γ_s=8°

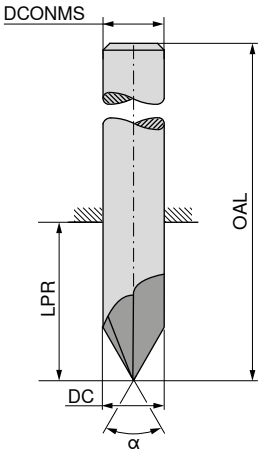

DLC DRAGONSKIN

DLC DRAGONSKIN

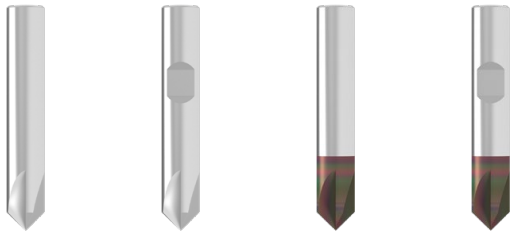

	α = 90° Factory standard	α = 90° Factory standard	α = 90° Factory standard	α = 90° Factory standard
	53 664 ...	53 665 ...	53 660 ...	53 661 ...
DC mm	EUR V1	EUR V1	EUR V1	EUR V1
4	39,99 **04000**		46,84 **04000**	
6	44,64 **06000**	44,64 **06000**	51,50 **06000**	51,50 **06000**
8	52,14 **08000**	52,14 **08000**	59,89 **08000**	59,89 **08000**
10	73,65 **10000**	73,65 **10000**	82,95 **10000**	82,95 **10000**
12	82,95 **12000**	82,95 **12000**	93,56 **12000**	93,56 **12000**
16	138,20 **16000**	138,20 **16000**	152,50 **16000**	152,50 **16000**

DC mm	OAL mm	LPR mm	DCONMS mm	ZEFP
4	50	22	4	4
6	55	19	6	4
8	58	22	8	4
10	60	20	10	4
12	70	25	12	4
16	80	32	16	4

P				
M				
K				
N	●	●	●	●
S				
H				
O	●	●	●	●

→ v_c/f_z Page 419

14

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 45°



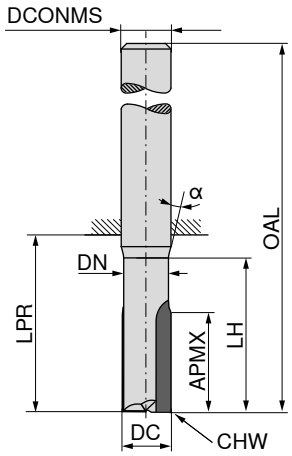

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 010 ... EUR V1/5B		50 010 ... EUR V1/5B	
3	6	2,8	11	21	57	6	0,15	2	219,80	**03100**		
3	6	2,8	22	64	100	6	0,15	2			226,60	**03300**
4	8	3,5	13	21	57	6	0,15	2	243,70	**04100**		
4	8	3,5	26	64	100	6	0,15	2			250,60	**04300**
5	10	4,4	15	21	57	6	0,15	2	264,30	**05100**		
5	10	4,4	30	64	100	6	0,15	2			271,10	**05300**
6	12	5,4	19	21	57	6	0,15	2	291,70	**06100**		
6	12	5,4	38	64	100	6	0,15	2			298,40	**06300**
8	16	7,2	26	28	64	8	0,15	2	381,20	**08100**		
8	16	7,2	52	64	100	8	0,15	2			395,10	**08300**
10	20	9,0	31	34	74	10	0,15	2	453,10	**10100**		
10	20	9,0	60	60	100	10	0,15	2			460,00	**10300**

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 412+413

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



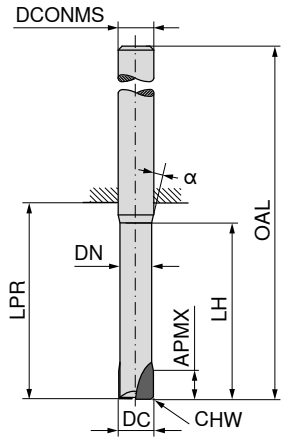



50 011 ...

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1/5B	
2	2,0	1,7	6	39	75	6	0,1	1	165,00	**02100**
2	2,0	1,7	10	39	75	6	0,1	1	165,00	**02300**
2	2,0	1,7	14	39	75	6	0,1	1	165,00	**02200**
3	2,5	2,5	9	39	75	6	0,2	2	199,20	**03100**
3	2,5	2,5	15	39	75	6	0,2	2	199,20	**03300**
3	2,5	2,5	21	39	75	6	0,2	2	199,20	**03200**
4	2,5	3,5	12	39	75	6	0,2	2	206,00	**04100**
4	2,5	3,5	20	39	75	6	0,2	2	206,00	**04300**
4	2,5	3,5	28	39	75	6	0,2	2	206,00	**04200**
5	3,0	4,4	15	39	75	6	0,2	2	216,30	**05100**
5	3,0	4,4	25	39	75	6	0,2	2	216,30	**05300**
5	3,0	4,4	35	39	75	6	0,2	2	216,30	**05200**
6	6,0	5,4	18	64	100	6	0,2	2	254,00	**06100**
6	6,0	5,4	30	64	100	6	0,2	2	254,00	**06300**
6	6,0	5,4	42	64	100	6	0,2	2	254,00	**06200**
8	7,0	7,2	24	64	100	8	0,2	2	330,00	**08100**
8	7,0	7,2	40	64	100	8	0,2	2	330,00	**08300**
10	8,0	9,0	30	60	100	10	0,2	2	374,40	**10100**
10	8,0	9,0	50	60	100	10	0,2	2	374,40	**10300**
12	9,0	11,0	36	60	105	12	0,2	2	418,90	**12100**
12	9,0	11,0	58	60	105	12	0,2	2	418,90	**12300**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

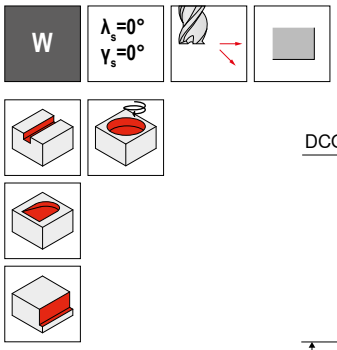

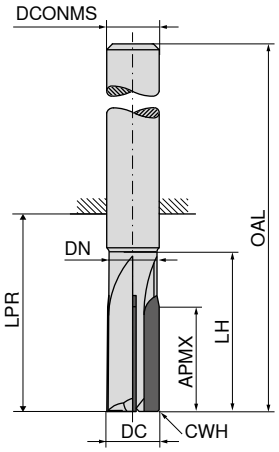

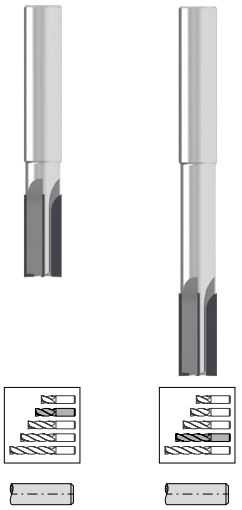

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 013 ... EUR V1/5B		50 013 ... EUR V1/5B	
6	12	5,4	19	21	57	6	0,05	4	432,00	**06100**		
6	12	5,4	38	64	100	6	0,05	4			438,80	**06200**
8	16	7,2	26	28	64	8	0,05	4	572,90	**08100**		
8	16	7,2	52	64	100	8	0,05	4			583,20	**08200**
10	20	9,0	31	34	74	10	0,10	4	706,40	**10100**		
10	20	9,0	62	60	100	10	0,10	4			716,70	**10200**
12	24	11,0	37	39	84	12	0,10	4	809,10	**12100**		
12	24	11,0	73	70	115	12	0,10	4			826,30	**12200**
16	32	15,0	44	45	93	16	0,20	4	1.066,00	**16100**		
16	32	15,0	88	90	130	16	0,20	4			1.117,00	**16200**
20	38	19,0	53	54	104	20	0,20	4	1.305,00	**20100**		
20	38	19,0	105	110	160	20	0,20	4			1.388,00	**20200**
P												
M												
K												
N										●		●
S												
H												
O										●		●

→ v_c/f_z Page 412+413

PCD radius cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



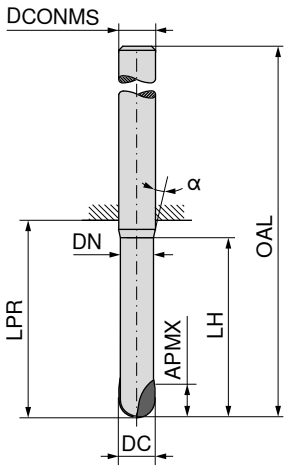

DC h7 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 014 ... EUR V1/5B	
2	2,0	1,7	6	39	75	6	1	168,30	**02100**
2	2,0	1,7	10	39	75	6	1	168,30	**02200**
2	2,0	1,7	14	39	75	6	1	168,30	**02300**
2	2,0	1,7	35	39	75	6	1	168,30	**02400**
3	2,5	2,5	9	39	75	6	2	199,20	**03100**
3	2,5	2,5	15	39	75	6	2	199,20	**03200**
3	2,5	2,5	21	39	75	6	2	199,20	**03300**
3	2,5	2,5	35	39	75	6	2	199,20	**03400**
4	2,5	3,5	12	39	75	6	2	206,00	**04100**
4	2,5	3,5	20	39	75	6	2	206,00	**04200**
4	2,5	3,5	28	39	75	6	2	206,00	**04300**
4	2,5	3,5	35	39	75	6	2	206,00	**04400**
5	3,0	4,4	15	39	75	6	2	216,30	**05100**
5	3,0	4,4	25	39	75	6	2	216,30	**05200**
5	3,0	4,4	35	39	75	6	2	216,30	**05400**
6	6,0	5,4	18	64	100	6	2	260,80	**06100**
6	6,0	5,4	30	64	100	6	2	260,80	**06200**
6	6,0	5,4	40	64	100	8	2	260,80	**06300**
6	6,0	5,4	42	64	100	6	2	260,80	**06400**
8	7,0	7,2	24	64	100	8	2	333,30	**08100**
8	7,0	7,2	40	64	100	8	2	333,30	**08300**
8	7,0	7,2	40	60	100	10	2	333,30	**08900**
10	8,0	9,0	30	60	100	10	2	360,70	**10100**
10	8,0	9,0	40	55	100	12	2	360,70	**10200**
10	8,0	9,0	50	60	100	10	2	360,70	**10300**
12	9,0	11,0	36	60	105	12	2	418,90	**12100**
12	9,0	11,0	40	55	100	16	2	418,90	**12200**
12	9,0	11,0	58	60	105	12	2	418,90	**12400**
16	11,0	15,0	45	82	130	16	2	562,70	**16200**
16	11,0	15,0	50	82	130	16	2	562,70	**16300**
20	13,0	19,0	60	110	160	20	2	709,90	**20400**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD torus cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



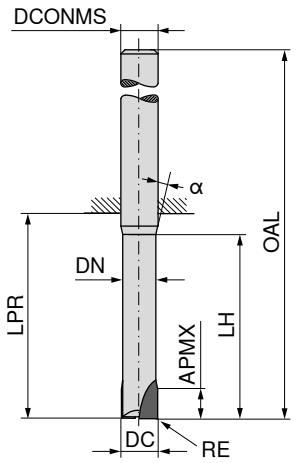

50 012 ...

DC h7 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
2	0,3	2,0	1,7	6	39	75	6	1	171,70	**02103**
2	0,3	2,0	1,7	10	39	75	6	1	171,70	**02203**
2	0,3	2,0	1,7	14	39	75	6	1	171,70	**02303**
2	0,3	2,0	1,7	35	39	75	6	1	171,70	**02403**
3	0,3	2,5	2,5	9	39	75	6	2	207,20	**03103**
3	0,3	2,5	2,5	15	39	75	6	2	207,20	**03203**
3	0,3	2,5	2,5	21	39	75	6	2	207,20	**03303**
3	0,3	2,5	2,5	35	39	75	6	2	207,20	**03403**
4	0,3	2,5	3,5	12	39	75	6	2	214,30	**04103**
4	0,3	2,5	3,5	20	39	75	6	2	214,30	**04203**
4	0,3	2,5	3,5	28	39	75	6	2	214,30	**04303**
4	0,3	2,5	3,5	35	39	75	6	2	214,30	**04403**
5	0,3	3,0	4,4	15	39	75	6	2	225,00	**05103**
5	0,3	3,0	4,4	25	39	75	6	2	225,00	**05203**
5	0,3	3,0	4,4	35	39	75	6	2	225,00	**05303**
6	0,3	6,0	5,4	18	64	100	6	2	264,20	**06103**
6	0,3	6,0	5,4	30	64	100	6	2	264,20	**06203**
6	0,3	6,0	5,4	42	64	100	6	2	264,20	**06403**
6	0,5	6,0	5,4	18	64	100	6	2	264,20	**06105**
6	0,5	6,0	5,4	30	64	100	6	2	264,20	**06205**
6	0,5	6,0	5,4	42	64	100	6	2	264,20	**06405**
6	1,0	6,0	5,4	18	64	100	6	2	264,20	**06110**
6	1,0	6,0	5,4	40	64	100	8	2	264,20	**06310**
6	1,0	6,0	5,4	42	64	100	6	2	264,20	**06410**
8	0,3	7,0	7,2	24	64	100	8	2	343,10	**08103**
8	0,3	7,0	7,2	40	64	100	8	2	343,10	**08203**
8	0,5	7,0	7,2	24	64	100	8	2	343,10	**08105**
8	0,5	7,0	7,2	40	64	100	8	2	343,10	**08205**
8	1,0	7,0	7,2	24	64	100	8	2	343,10	**08110**
8	1,0	7,0	7,2	40	64	100	8	2	343,10	**08210**
8	2,0	7,0	7,2	24	64	100	8	2	343,10	**08120**
8	2,0	7,0	7,2	40	60	100	10	2	343,10	**08920**
8	2,0	7,0	7,2	40	64	100	8	2	343,10	**08220**
10	0,5	8,0	9,0	30	60	100	10	2	389,50	**10105**
10	0,5	8,0	9,0	50	60	100	10	2	389,50	**10305**
10	1,0	8,0	9,0	30	60	100	10	2	389,50	**10110**
10	1,0	8,0	9,0	50	60	100	10	2	389,50	**10310**
10	1,5	8,0	9,0	30	60	100	10	2	389,50	**10115**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

Continued on next page

PCD torus cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

▲ Transition angle α = 15°



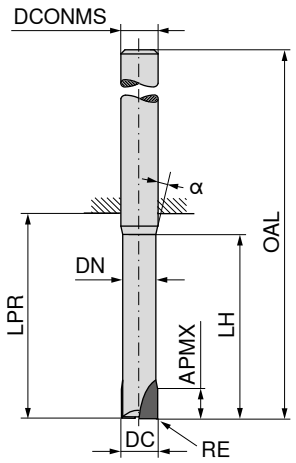

50 012 ...

DC h7 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
10	1,5	8,0	9,0	50	60	100	10	2	389,50	**10315**
10	2,0	8,0	9,0	30	60	100	10	2	389,50	**10120**
10	2,0	8,0	9,0	50	60	100	10	2	389,50	**10320**
10	3,0	8,0	9,0	30	60	100	10	2	389,50	**10130**
10	3,0	8,0	9,0	40	55	100	12	2	389,50	**10230**
10	3,0	8,0	9,0	50	60	100	10	2	389,50	**10330**
12	0,5	9,0	11,0	36	60	105	12	2	435,70	**12105**
12	0,5	9,0	11,0	58	60	105	12	2	435,70	**12305**
12	1,0	9,0	11,0	36	60	105	12	2	435,70	**12110**
12	1,0	9,0	11,0	58	60	105	12	2	435,70	**12310**
12	1,5	9,0	11,0	36	60	105	12	2	435,70	**12115**
12	1,5	9,0	11,0	58	60	105	12	2	435,70	**12315**
12	4,0	9,0	11,0	40	52	100	16	2	435,70	**12240**
16	3,0	11,0	15,0	45	82	130	16	2	585,20	**16130**
16	5,0	11,0	15,0	50	82	130	16	2	585,20	**16250**
20	6,0	13,0	19,0	60	140	160	20	2	599,50	**20260**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

14

PCD end mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

W | λ_s=20° γ_s= 0° | HPC

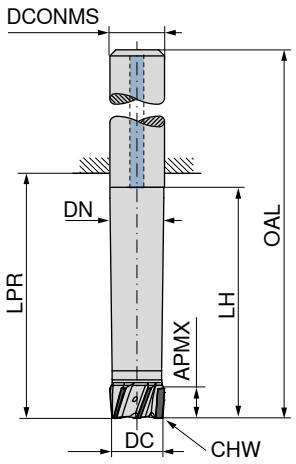

50 015 ...

DC mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS mm	CHW mm	ZEFP	KOMET no.	EUR V8	
10	5	9,6	25,0	27	67	10	0,2	4	38320001001000	744,70	**10200**
12	5	11,6	30,0	33	78	12	0,2	4	38320001001200	744,70	**12200**
16	11	15,6	40,0	43	91	16	0,2	5	38320001001600	837,00	**16200**
20	11	19,6	50,0	54	104	20	0,2	6	38320001002000	933,40	**20200**
25	11	24,6	62,5	68	124	25	0,2	8	38320001002500	1.220,00	**25200**
32	11	31,6	80,0	87	147	32	0,2	10	38320001003200	1.559,00	**32200**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD face and shoulder mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





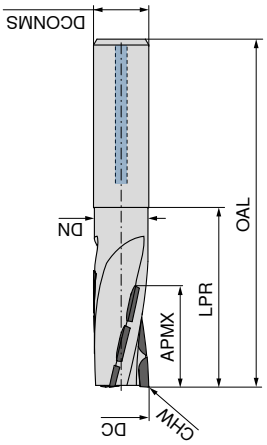



50 020 ...

DC h7 mm	APMX mm	DN mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	KOMET no.	EUR V8	
16	30	15,5	45	93	16	3	38170099001600	858,00	**01600**
20	30	19,5	50	100	20	3	38170099002000	873,50	**02000**
25	30	24,5	54	110	25	3	38170099002500	886,50	**02500**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

14

PCD drilling slot screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics

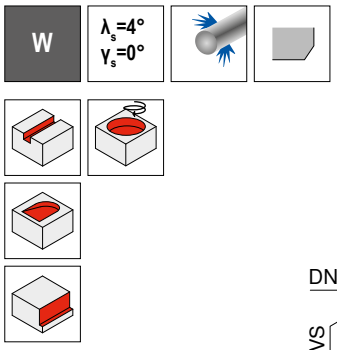

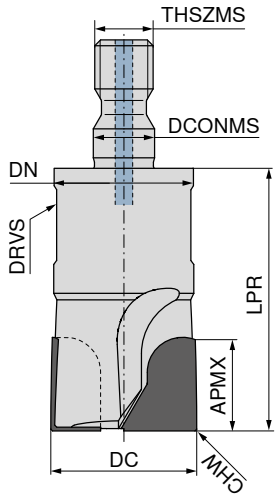



50 016 ...

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	CHW mm	DRVS mm	ZEFP	THSZMS	KOMET no.	EUR V8	
10	10	9,6	28	5,5	0,2	8	2	M5	37340099001000	453,00	**01000**
12	12	9,6	28	5,5	0,2	8	2	M5	37340099001200	495,90	**01200**
16	16	13,8	32	8,5	0,2	13	3	M8	37340099001600	595,00	**01600**
20	20	18,0	45	10,5	0,2	16	3	M10	37340099002000	725,20	**02000**
25	20	21,0	45	12,6	0,2	18	3	M12	37340099002500	916,50	**02500**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD face screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





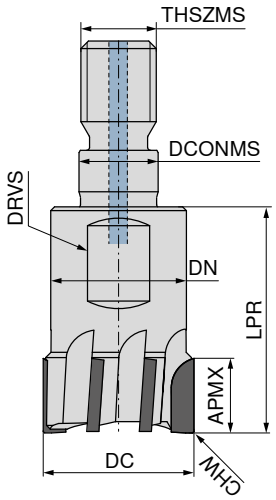

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	CHW mm	DRVS mm	ZEFP	THSZMS	KOMET no.	50 018 ... EUR V8	
10	5	9,6	22	5,5	0,2	8	2	M5	37341099001000	365,70	**01000**
12	5	9,6	28	5,5	0,2	8	2	M5	37341099001200	365,70	**01200**
16	10	13,8	28	8,5	0,2	13	3	M8	37341099001600	493,40	**01600**
20	10	18,0	30	10,5	0,2	16	4	M10	37341099002000	614,50	**02000**
25	10	21,0	35	12,5	0,2	18	5	M12	37341099002500	695,20	**02500**
32	10	29,0	35	17,0	0,2	27	6	M16	37341099003200	769,30	**03200**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





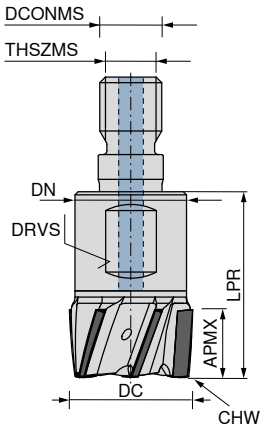

50 015 ...

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	CHW mm	DRVS mm	ZEFP	THSZMS	KOMET no.	EUR V8	
10	5	9,6	22	5,5	0,2	8	4	M5	37310001001000	731,60	**10100**
12	5	11,5	22	6,5	0,2	10	4	M6	37310099001200	741,60	**12100**
16	11	13,8	28	8,5	0,2	13	5	M8	37310001001600	822,80	**16100**
20	11	18,0	30	10,5	0,2	16	6	M10	37310001002000	920,40	**20100**
25	11	21,0	35	12,5	0,2	18	8	M12	37310001002500	1.112,00	**25100**
32	11	29,0	35	17,0	0,2	27	10	M16	37310001003200	1.308,00	**32100**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD radius screw-in cutter

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics



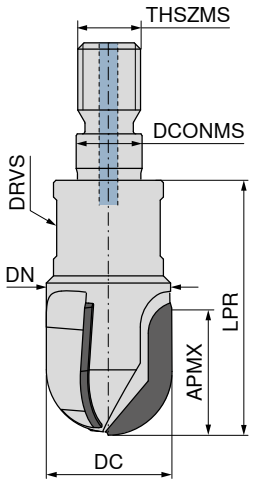

DC mm	APMX mm	DN mm	LPR mm	DCONMS mm	DRVS mm	ZEFP	THSZMS	KOMET no.	50 017 ... EUR V8	
10	10	9,6	28	5,5	8	2	M5	37340098001000	453,00	**01000**
12	12	9,6	28	5,5	8	2	M5	37340098001200	495,90	**01200**
16	16	13,8	32	8,5	13	3	M8	37340098001600	595,00	**01600**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412+413

PCD face mill

The tool with the highest cutting parameters and longest service lives for machining non-ferrous metals and plastics





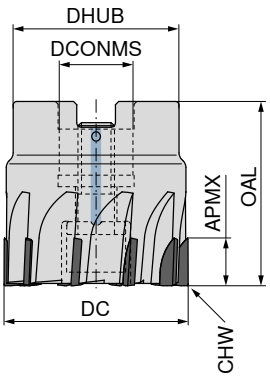

50 019 ...

DC mm	OAL mm	DHUB mm	APMX mm	DCONMS H6 mm	CHW mm	ZNF	KOMET no.	EUR V8	
40	40	36	10	16	0,2	10	37155099004000	1.841,00	**04000**
50	40	41	10	22	0,2	12	37155099005000	2.194,00	**05000**
63	40	48	10	22	0,2	14	37155099006300	2.543,00	**06300**
80	50	60	10	27	0,2	16	37155099008000	2.804,00	**08000**
100	50	78	10	32	0,2	18	37155099010000	3.148,00	**10000**
125	63	100	10	40	0,2	22	37155099012500	3.678,00	**12500**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 412

Spare parts can be found in our online shop at cuttingtools.ceratizit.com.

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s=30° γ_s=14° | HPC



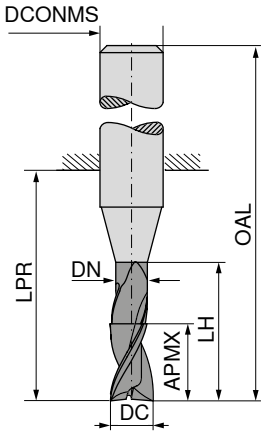

DPB72S

DRAGONSKIN

≈DIN 6527

50 558 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR V0/5A	
3,0	8	2,8	15	21	57	6	2	50,06	**03200**
3,5	11	3,3	15	21	57	6	2	50,06	**03700**
4,0	11	3,8	15	21	57	6	2	50,06	**04200**
4,5	13	4,3	21	21	57	6	2	50,06	**04700**
5,0	13	4,8	21	21	57	6	2	50,06	**05200**
5,5	13	5,3	21	21	57	6	2	50,06	**05700**
6,0	13	5,8	21	21	57	6	2	50,06	**06200**
7,0	16	6,8	27	27	63	8	2	58,31	**07200**
8,0	19	7,8	27	27	63	8	2	58,31	**08200**
9,0	19	8,8	32	32	72	10	2	81,14	**09200**
10,0	22	9,8	32	32	72	10	2	81,14	**10200**
11,0	26	10,8	38	38	83	12	2	117,60	**11200**
12,0	26	11,8	38	38	83	12	2	117,60	**12200**
14,0	26	13,8	38	38	83	14	2	146,60	**14200**
15,0	32	14,7	44	44	92	16	2	190,00	**15200**
16,0	32	15,7	44	44	92	16	2	190,00	**16200**
17,0	32	16,7	44	44	92	18	2	230,80	**17200**
18,0	32	17,7	44	44	92	18	2	230,80	**18200**
19,0	38	18,7	54	54	104	20	2	285,60	**19200**
20,0	38	19,7	54	54	104	20	2	285,60	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 384+385

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s=30° γ_s=14° | HPC



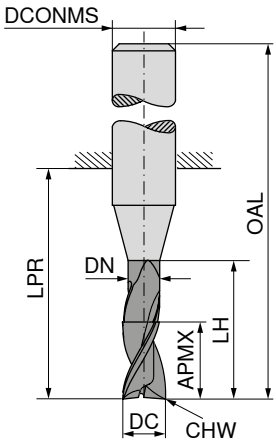

DPB72S

DRAGONSKIN

≈DIN 6527

50 958 ...

DC $_{e8}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	EUR V0/5A	
3,0	8	2,8	15	21	57	6	0,1	2	50,06	**03200**
3,5	11	3,3	15	21	57	6	0,1	2	50,06	**03700**
4,0	11	3,8	15	21	57	6	0,1	2	50,06	**04200**
4,5	13	4,3	21	21	57	6	0,1	2	50,06	**04700**
5,0	13	4,8	21	21	57	6	0,1	2	50,06	**05200**
5,5	13	5,3	21	21	57	6	0,1	2	50,06	**05700**
6,0	13	5,8	21	21	57	6	0,1	2	50,06	**06200**
7,0	16	6,8	27	27	63	8	0,1	2	58,31	**07200**
8,0	19	7,8	27	27	63	8	0,1	2	58,31	**08200**
9,0	19	8,8	32	32	72	10	0,1	2	81,14	**09200**
10,0	22	9,8	32	32	72	10	0,1	2	81,14	**10200**
11,0	26	10,8	38	38	83	12	0,1	2	117,60	**11200**
12,0	26	11,8	38	38	83	12	0,1	2	117,60	**12200**
14,0	26	13,8	38	38	83	14	0,1	2	146,60	**14200**
15,0	32	14,7	44	44	92	16	0,1	2	190,00	**15200**
16,0	32	15,7	44	44	92	16	0,1	2	190,00	**16200**
17,0	32	16,7	44	44	92	18	0,1	2	230,80	**17200**
18,0	32	17,7	44	44	92	18	0,1	2	230,80	**18200**
19,0	38	18,7	54	54	104	20	0,1	2	285,60	**19200**
20,0	38	19,7	54	54	104	20	0,1	2	285,60	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 384+385

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s=45° γ_s= 5° | HPC



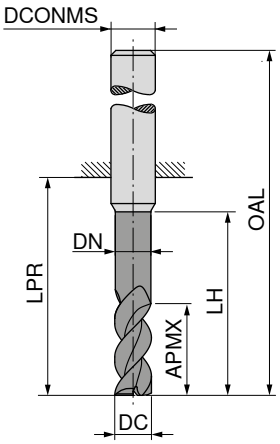

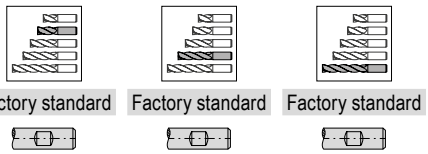

Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 992 ... EUR V0/5A		50 992 ... EUR V0/5A		50 992 ... EUR V0/5A	
3,0	8	2,9	15	21	57	6	3			60,70	**03200**		
3,5	11	3,4	16	21	57	6	3			60,70	**03700**		
4,0	8	3,9	15	18	54	6	3	58,52	**04100**				
4,0	11	3,9	16	21	57	6	3			58,52	**04200**		
4,0	16			26	62	6	3					61,70	**04400**
4,5	13	4,4	19	21	57	6	3			60,70	**04700**		
5,0	9	4,9	16	18	54	6	3	58,52	**05100**				
5,0	13	4,9	19	21	57	6	3			58,52	**05200**		
5,0	17			26	62	6	3					61,70	**05400**
5,5	13	5,4	19	21	57	6	3			63,67	**05700**		
6,0	10	5,9	17	18	54	6	3	60,86	**06100**				
6,0	13	5,9	19	21	57	6	3			61,56	**06200**		
6,0	18			26	62	6	3					68,42	**06400**
6,5	19	6,3	25	27	63	8	3			74,04	**06700**		
7,0	19	6,8	25	27	63	8	3			74,04	**07200**		
7,5	19	7,3	25	27	63	8	3			74,04	**07700**		
8,0	12		20	22	58	8	3	69,14	**08100**				
8,0	19	7,8	25	27	63	8	3			71,89	**08200**		
8,0	24			32	68	8	3					76,85	**08400**
8,5	22	8,2	30	32	72	10	3			123,40	**08700**		
9,0	22	8,7	30	32	72	10	3			123,40	**09200**		
9,5	22	9,2	30	32	72	10	3			123,40	**09700**		
10,0	14	9,7	24	26	66	10	3	109,30	**10100**				
10,0	22	9,7	30	32	72	10	3			121,10	**10200**		
10,0	30			40	80	10	3					136,80	**10400**
12,0	16	11,7	26	28	73	12	3	153,20	**12100**				
12,0	26	11,7	36	38	83	12	3			164,00	**12200**		
12,0	36			48	93	12	3					185,80	**12400**
14,0	18	13,7	28	30	75	14	3	189,30	**14100**				
14,0	26	13,7	36	38	83	14	3			216,30	**14200**		
14,0	42			54	99	14	3					240,60	**14400**
16,0	22	15,5	32	34	82	16	3	229,10	**16100**				
16,0	32	15,5	42	44	92	16	3			367,10	**16200**		
16,0	48			60	108	16	3					371,10	**16400**
18,0	24	17,5	34	36	84	18	3	316,10	**18100**				
18,0	32	17,5	42	44	92	18	3			378,40	**18200**		
18,0	54			66	114	18	3					478,50	**18400**
20,0	26	19,5	40	42	92	20	3	387,30	**20100**				
20,0	38	19,5	52	54	104	20	3			441,50	**20200**		
20,0	60			76	126	20	3					552,50	**20400**

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	●	●	●
H			
O			

→ v_c/f_z Page 386+387

14

SilverLine – End milling cutter

The all-rounder for universal application

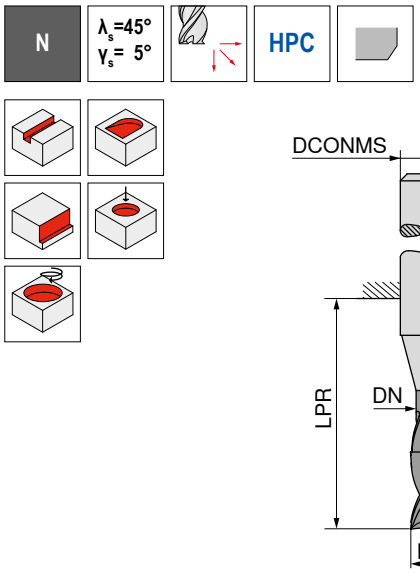

									≈DIN 6527		≈DIN 6527		≈DIN 6527	
									50 966 ...		50 966 ...		50 966 ...	
DC f8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	mm	mm		V0/5A		V0/5A		V0/5A	
3,0	8	2,9	15	21	57	6	0,1	3			60,70	03200		
3,5	11	3,4	16	21	57	6	0,1	3			60,70	03700		
4,0	8	3,9	15	18	54	6	0,1	3	58,52	04100				
4,0	11	3,9	16	21	57	6	0,1	3			58,52	04200		
4,0	16			26	62	6	0,1	3					61,70	04400
4,5	13	4,4	19	21	57	6	0,1	3			60,70	04700		
5,0	9	4,9	16	18	54	6	0,1	3	58,52	05100				
5,0	13	4,9	19	21	57	6	0,1	3			58,52	05200		
5,0	17			26	62	6	0,1	3					61,70	05400
5,5	13	5,4	19	21	57	6	0,1	3			63,67	05700		
6,0	10	5,9	17	18	54	6	0,2	3	60,86	06100				
6,0	13	5,9	19	21	57	6	0,2	3			61,56	06200		
6,0	18			26	62	6	0,2	3					68,42	06400
6,5	19	6,3	25	27	63	8	0,2	3			74,04	06700		
7,0	19	6,8	25	27	63	8	0,2	3			74,04	07200		
7,5	19	7,3	25	27	63	8	0,2	3			74,04	07700		
8,0	12	7,8	20	22	58	8	0,2	3	69,14	08100				
8,0	19	7,8	25	27	63	8	0,2	3			71,89	08200		
8,0	24			32	68	8	0,2	3					76,85	08400
8,5	22	8,2	30	32	72	10	0,2	3			123,40	08700		
9,0	22	8,7	30	32	72	10	0,2	3			123,40	09200		
9,5	22	9,2	30	32	72	10	0,2	3			123,40	09700		
10,0	14	9,7	24	26	66	10	0,2	3	109,30	10100				
10,0	22	9,7	30	32	72	10	0,2	3			121,10	10200		
10,0	30			40	80	10	0,2	3					136,80	10400
12,0	16	11,7	26	28	73	12	0,2	3	153,20	12100				
12,0	26	11,7	36	38	83	12	0,2	3			164,00	12200		
12,0	36			48	93	12	0,2	3					185,80	12400
14,0	18	13,7	28	30	75	14	0,2	3	189,30	14100				
14,0	26	13,7	36	38	83	14	0,2	3			216,30	14200		
14,0	42			54	99	14	0,2	3					240,60	14400
16,0	22	15,5	32	34	82	16	0,2	3	229,10	16100				
16,0	32	15,5	42	44	92	16	0,2	3			367,10	16200		
16,0	48			60	108	16	0,2	3					371,10	16400
18,0	24	17,5	34	36	84	18	0,2	3	316,10	18100				
18,0	32	17,5	42	44	92	18	0,2	3			378,40	18200		
18,0	54			66	114	18	0,2	3					478,50	18400
20,0	26	19,5	40	42	92	20	0,2	3	387,30	20100				
20,0	38	19,5	52	54	104	20	0,2	3			441,50	20200		
20,0	60			76	126	20	0,2	3					552,50	20400
P									●		●		●	
M									●		●		●	
K									●		●		●	
N									○		○		○	
S									●		●		●	
H														
O														

→ v_c/f_z Page 386+387

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

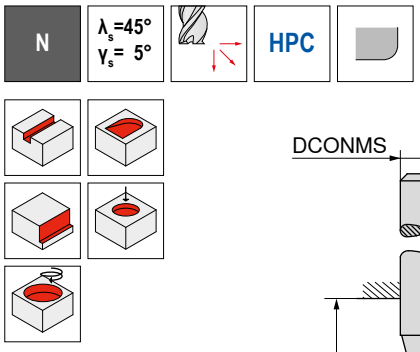

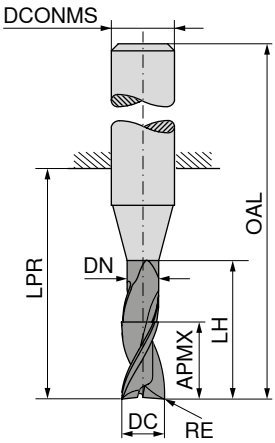

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 967 ... EUR V0/5A		50 967 ... EUR V0/5A		50 967 ... EUR V0/5A	
4,0	0,5	8	3,9	15	18	54	6	3	71,38	**04105**				
4,0	0,5	11	3,9	16	21	57	6	3			73,53	**04205**		
4,0	0,5	16			26	62	6	3					78,05	**04405**
5,0	0,5	9	4,9	16	18	54	6	3	71,38	**05105**				
5,0	0,5	13	4,9	19	21	57	6	3			73,53	**05205**		
5,0	0,5	17			26	62	6	3					78,05	**05405**
6,0	0,5	10	5,9	17	18	54	6	3	73,29	**06105**				
6,0	0,5	13	5,9	19	21	57	6	3			85,60	**06205**		
6,0	0,5	18			26	62	6	3					86,58	**06405**
8,0	1,0	12	7,8	20	22	58	8	3	86,19	**08110**				
8,0	1,0	19	7,8	25	27	63	8	3			98,33	**08210**		
8,0	1,0	24			32	68	8	3					104,23	**08410**
10,0	1,0	14	9,7	24	26	66	10	3	155,30	**10110**				
10,0	1,0	22	9,7	30	32	72	10	3			168,40	**10210**		
10,0	1,0	30			40	80	10	3					173,10	**10410**
12,0	1,5	16	11,7	26	28	73	12	3	214,70	**12115**				
12,0	1,5	26	11,7	36	38	83	12	3			228,80	**12215**		
12,0	1,5	36			48	93	12	3					235,00	**12415**
16,0	2,0	22	15,5	32	34	82	16	3	435,10	**16120**				
16,0	2,0	32	15,5	42	44	92	16	3			442,20	**16220**		
16,0	2,0	48			60	108	16	3					469,60	**16420**
20,0	2,0	26	19,5	40	42	92	20	3	629,60	**20120**				
20,0	2,0	38	19,5	52	54	104	20	3			644,70	**20220**		
20,0	2,0	60			76	126	20	3					699,10	**20420**

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	●	●	●
H			
O			

→ v_c/f_z Page 386+387

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s = 35° 38° | γ_s = 9° | HPC



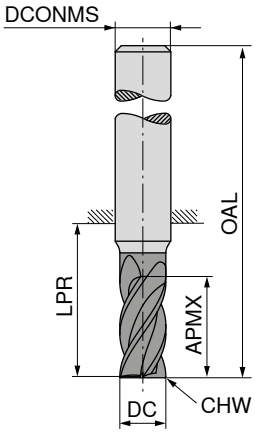

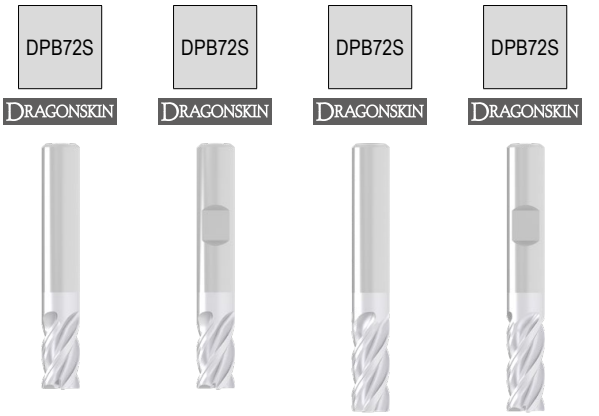



≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 972 ... EUR V0/5A	50 973 ... EUR V0/5A	50 972 ... EUR V0/5A	50 973 ... EUR V0/5A
3,0	5	14	50	6	0,1	4	50,21 03100	50,21 03100		
3,0	8	21	57	6	0,1	4			50,21 03200	50,21 03200
3,5	8	18	54	6	0,1	4	50,21 03600	50,21 03600		
3,5	11	21	57	6	0,1	4			50,21 03700	50,21 03700
4,0	8	18	54	6	0,1	4	50,21 04100	50,21 04100		
4,0	11	21	57	6	0,1	4			50,21 04200	50,21 04200
4,5	9	18	54	6	0,1	4	51,26 04600	51,26 04600		
4,5	13	21	57	6	0,1	4			51,26 04700	51,26 04700
5,0	9	18	54	6	0,1	4	51,26 05100	51,26 05100		
5,0	13	21	57	6	0,1	4			51,26 05200	51,26 05200
5,5	10	18	54	6	0,1	4	49,60 05600	49,60 05600		
5,5	13	21	57	6	0,1	4			49,60 05700	49,60 05700
6,0	10	18	54	6	0,1	4	49,60 06100	49,60 06100		
6,0	13	21	57	6	0,1	4			49,60 06200	49,60 06200
7,0	12	22	58	8	0,2	4	65,95 07100	65,95 07100		
7,0	21	27	63	8	0,2	4			65,95 07200	65,95 07200
8,0	12	22	58	8	0,2	4	65,95 08100	65,95 08100		
8,0	21	27	63	8	0,2	4			65,95 08200	65,95 08200
9,0	14	26	66	10	0,2	4	86,07 09100	86,07 09100		
9,0	22	32	72	10	0,2	4			86,07 09200	86,07 09200
10,0	14	26	66	10	0,2	4	86,07 10100	86,07 10100		
10,0	22	32	72	10	0,2	4			86,07 10200	86,07 10200
11,0	16	28	73	12	0,3	4	136,10 11100	136,10 11100		
11,0	26	38	83	12	0,3	4			136,10 11200	136,10 11200
12,0	16	28	73	12	0,3	4	136,10 12100	136,10 12100		
12,0	26	38	83	12	0,3	4			136,10 12200	136,10 12200
14,0	16	28	73	14	0,3	4	174,90 14100	174,90 14100		
14,0	26	38	83	14	0,3	4			174,90 14200	174,90 14200
15,0	22	34	82	16	0,3	4	215,90 15100	215,90 15100		
15,0	36	44	92	16	0,3	4			215,90 15200	215,90 15200
16,0	22	34	82	16	0,3	4	215,90 16100	215,90 16100		
16,0	36	44	92	16	0,3	4			215,90 16200	215,90 16200
17,0	22	34	82	18	0,3	4	293,70 17100	293,70 17100		
17,0	36	44	92	18	0,3	4			293,70 17200	293,70 17200
18,0	22	34	82	18	0,3	4	293,70 18100	293,70 18100		
18,0	36	44	92	18	0,3	4			293,70 18200	293,70 18200
19,0	26	42	92	20	0,3	4	333,20 19100	333,20 19100		
19,0	41	54	104	20	0,3	4			333,20 19200	333,20 19200
20,0	26	42	92	20	0,3	4	333,20 20100	333,20 20100		
20,0	41	54	104	20	0,3	4			333,20 20200	333,20 20200
P							●	●	●	●
M							●	●	●	●
K							●	●	●	●
N							○	○	○	○
S							●	●	●	●
H										
O										

→ v_c/f_z Page 392+393

SilverLine – End milling cutter

The all-rounder for universal application

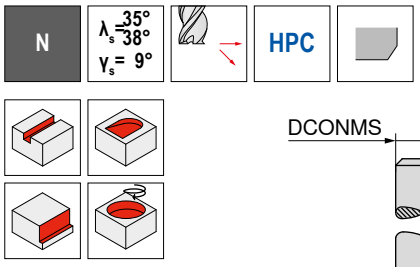

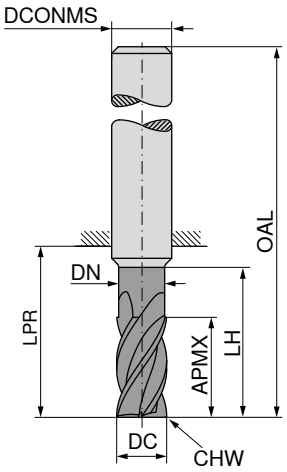

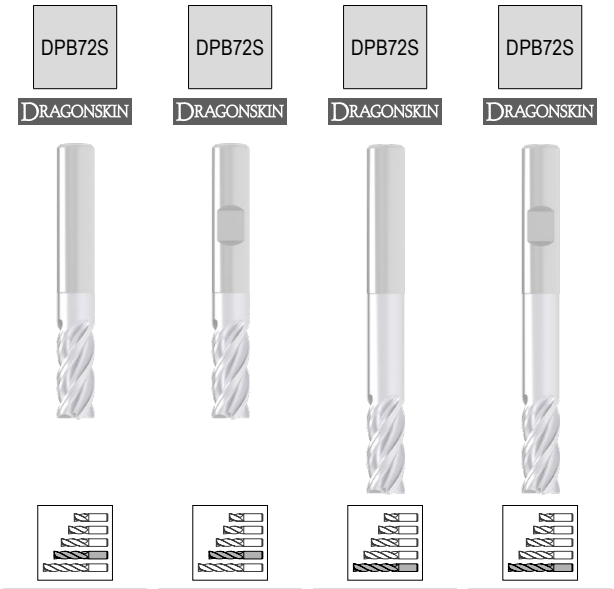

DIN 6527 | DIN 6527 | DIN 6527 | DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 974 ... EUR V0/5A		50 975 ... EUR V0/5A		50 974 ... EUR V0/5A		50 975 ... EUR V0/5A	
3,0	6,5	2,8	9	19	55	6	0,1	4	46,63	03200	46,63	03200				
3,0	6,5	2,8	15	22	58	6	0,1	4					48,91	03400	48,91	03400
4,0	8,5	3,8	12	19	55	6	0,1	4	46,63	04200	46,63	04200				
4,0	8,5	3,8	20	26	62	6	0,1	4					48,91	04400	48,91	04400
5,0	10,5	4,8	15	22	58	6	0,1	4	46,63	05200	46,63	05200				
5,0	10,5	4,8	25	34	70	6	0,1	4					48,91	05400	48,91	05400
6,0	13,0	5,8	18	22	58	6	0,1	4	46,63	06200	46,63	06200				
6,0	13,0	5,8	30	34	70	6	0,1	4					48,91	06400	48,91	06400
8,0	17,0	7,7	24	28	64	8	0,2	4	63,61	08200	63,61	08200				
8,0	17,0	7,7	40	44	80	8	0,2	4					69,99	08400	69,99	08400
10,0	21,0	9,7	30	34	74	10	0,2	4	93,08	10200	93,08	10200				
10,0	21,0	9,7	50	54	94	10	0,2	4					102,90	10400	102,90	10400
12,0	25,0	11,6	36	40	85	12	0,3	4	117,30	12200	117,30	12200				
12,0	25,0	11,6	60	64	109	12	0,3	4					128,70	12400	128,70	12400
14,0	29,0	13,6	42	46	91	14	0,3	4	164,50	14200	164,50	14200				
14,0	29,0	13,6	70	74	119	14	0,3	4					180,90	14400	180,90	14400
16,0	33,0	15,5	48	52	100	16	0,3	4	263,30	16200	263,30	16200				
16,0	33,0	15,5	80	84	132	16	0,3	4					289,70	16400	289,70	16400
18,0	38,0	17,5	54	58	106	18	0,3	4	333,00	18200	333,00	18200				
18,0	38,0	17,5	90	94	142	18	0,3	4					366,30	18400	366,30	18400
20,0	42,0	19,5	60	64	114	20	0,3	4	360,10	20200	360,10	20200				
20,0	42,0	19,5	100	104	154	20	0,3	4					398,80	20400	398,80	20400

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

14

→ v_c/f_z Page 392–391

SilverLine – End milling cutter

The all-rounder for universal application

▲ Especially for high-volume milling





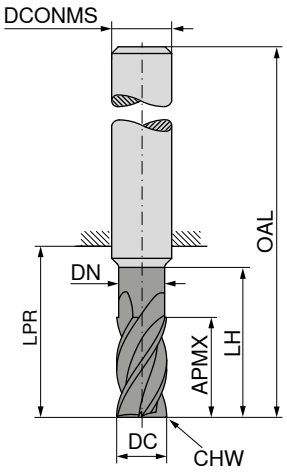





DIN 6527

DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 976 ... EUR V0/5A		50 977 ... EUR V0/5A	
3,0	8	2,8	13	21	57	6	0,1	4	53,92	**03200**	53,92	**03200**
4,0	11	3,8	17	21	57	6	0,1	4	53,92	**04200**	53,92	**04200**
5,0	13	4,8	19	21	57	6	0,1	4	53,92	**05200**	53,92	**05200**
6,0	13	5,8	19	21	57	6	0,1	4	53,92	**06200**	53,92	**06200**
8,0	21	7,7	25	27	63	8	0,2	4	72,68	**08200**	72,68	**08200**
10,0	22	9,7	30	32	72	10	0,2	4	106,40	**10200**	106,40	**10200**
12,0	26	11,6	36	38	83	12	0,3	4	135,90	**12200**	135,90	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	187,90	**14200**	187,90	**14200**
16,0	36	15,5	42	44	92	16	0,3	4	306,70	**16200**	306,70	**16200**
18,0	36	17,5	42	44	92	18	0,3	4	402,30	**18200**	402,30	**18200**
20,0	41	19,5	52	54	104	20	0,3	4	418,20	**20200**	418,20	**20200**

P	●	●
M	●	●
K	●	●
N	○	○
S		
H		
O		

→ v_c/f_z Page 388+389

SilverLine – End milling cutter

The all-rounder for universal application





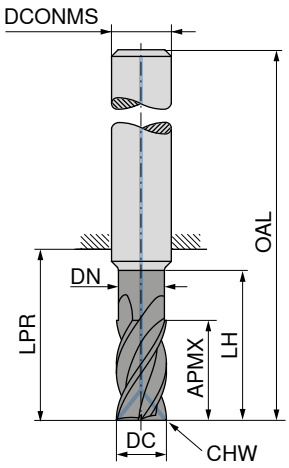

DPB72S

DRAGONSKIN

DIN 6527

50 978 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V0/5A	
6,0	13	5,8	19	21	57	6	0,1	4	139,40	**06200**
8,0	21	7,7	25	27	63	8	0,2	4	162,60	**08200**
10,0	22	9,7	30	32	72	10	0,2	4	183,80	**10200**
12,0	26	11,6	36	38	83	12	0,3	4	257,00	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	394,20	**14200**
16,0	36	15,5	42	44	92	16	0,3	4	394,20	**16200**
18,0	36	17,5	42	44	92	18	0,3	4	524,70	**18200**
20,0	41	19,5	52	54	104	20	0,3	4	524,70	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 392+393

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

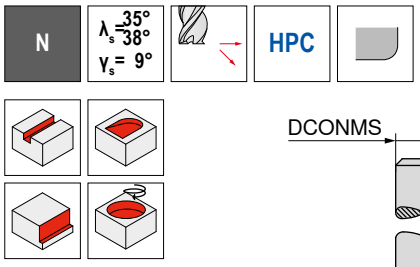

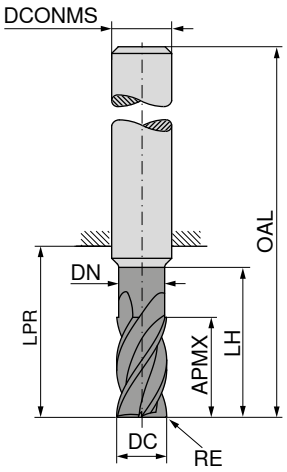

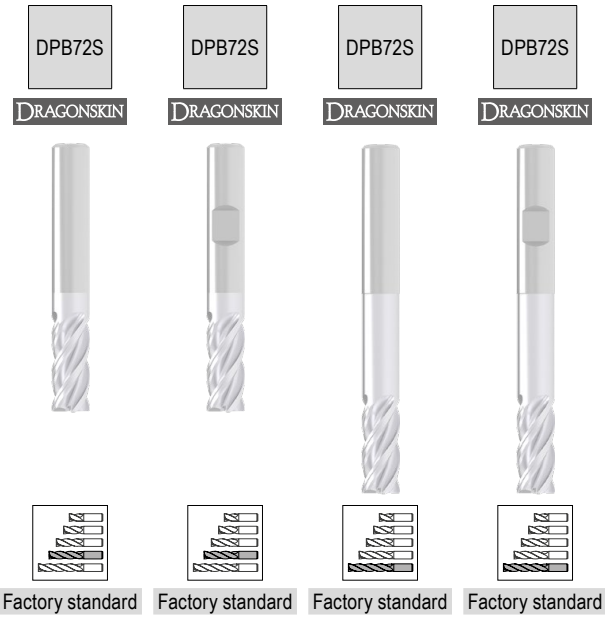

Factory standard | Factory standard | Factory standard | Factory standard

									50 970 ...		50 971 ...		50 970 ...		50 971 ...	
DC f8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	EUR		EUR		EUR		EUR	
mm	mm	mm	mm	mm	mm	mm	mm		V0/5A		V0/5A		V0/5A		V0/5A	
3,0	0,10	8,0	2,8	13	21	57	6	4	67,66	03201	67,66	03201				
3,0	0,40	8,0	2,8	13	21	57	6	4	67,66	03204	67,66	03204				
3,0	0,50	8,0	2,8	13	21	57	6	4	67,66	03205	67,66	03205				
3,0	1,00	8,0	2,8	13	21	57	6	4	67,66	03210	67,66	03210				
3,0	0,30	6,5	2,8	15	22	58	6	4					79,54	03403	79,54	03403
3,0	0,50	6,5	2,8	15	22	58	6	4					79,54	03405	79,54	03405
3,0	0,80	6,5	2,8	15	22	58	6	4					79,54	03408	79,54	03408
4,0	0,10	11,0	3,8	17	21	57	6	4	67,66	04201	67,66	04201				
4,0	0,40	11,0	3,8	17	21	57	6	4	67,66	04204	67,66	04204				
4,0	0,50	11,0	3,8	17	21	57	6	4	67,66	04205	67,66	04205				
4,0	1,00	11,0	3,8	17	21	57	6	4	67,66	04210	67,66	04210				
4,0	0,40	8,5	3,8	20	26	62	6	4					79,54	04404	79,54	04404
4,0	0,50	8,5	3,8	20	26	62	6	4					79,54	04405	79,54	04405
4,0	0,80	8,5	3,8	20	26	62	6	4					79,54	04408	79,54	04408
5,0	0,10	13,0	4,8	19	21	57	6	4	68,79	05201	68,79	05201				
5,0	0,50	13,0	4,8	19	21	57	6	4	68,79	05205	68,79	05205				
5,0	1,00	13,0	4,8	19	21	57	6	4	68,79	05210	68,79	05210				
5,0	0,50	10,5	4,8	25	34	70	6	4					80,79	05405	80,79	05405
5,0	0,80	10,5	4,8	25	34	70	6	4					80,79	05408	80,79	05408
6,0	0,10	13,0	5,8	19	21	57	6	4	67,11	06201	67,11	06201				
6,0	0,50	13,0	5,8	19	21	57	6	4	67,11	06205	67,11	06205				
6,0	1,00	13,0	5,8	19	21	57	6	4	67,11	06210	67,11	06210				
6,0	1,50	13,0	5,8	19	21	57	6	4	67,11	06215	67,11	06215				
6,0	0,60	13,0	5,8	30	34	70	6	4					80,79	06406	80,79	06406
6,0	0,80	13,0	5,8	30	34	70	6	4					80,79	06408	80,79	06408
6,0	1,00	13,0	5,8	30	34	70	6	4					80,79	06410	80,79	06410
8,0	0,15	21,0	7,7	25	27	63	8	4	84,14	08202	84,14	08202				
8,0	0,50	21,0	7,7	25	27	63	8	4	84,14	08205	84,14	08205				
8,0	1,00	21,0	7,7	25	27	63	8	4	84,14	08210	84,14	08210				
8,0	1,50	21,0	7,7	25	27	63	8	4	84,14	08215	84,14	08215				
8,0	2,00	21,0	7,7	25	27	63	8	4	84,14	08220	84,14	08220				
8,0	0,80	17,0	7,7	40	44	80	8	4					97,83	08408	97,83	08408
8,0	1,00	17,0	7,7	40	44	80	8	4					97,83	08410	97,83	08410
8,0	1,50	17,0	7,7	40	44	80	8	4					97,83	08415	97,83	08415
8,0	2,00	17,0	7,7	40	44	80	8	4					97,83	08420	97,83	08420
10,0	0,15	22,0	9,7	30	32	72	10	4	105,20	10202	105,20	10202				
10,0	0,50	22,0	9,7	30	32	72	10	4	105,20	10205	105,20	10205				
10,0	1,00	22,0	9,7	30	32	72	10	4	105,20	10210	105,20	10210				
10,0	1,50	22,0	9,7	30	32	72	10	4	105,20	10215	105,20	10215				
10,0	2,00	22,0	9,7	30	32	72	10	4	105,20	10220	105,20	10220				
10,0	0,50	21,0	9,7	50	54	94	10	4					121,00	10405	121,00	10405
10,0	1,00	21,0	9,7	50	54	94	10	4					121,00	10410	121,00	10410
10,0	1,50	21,0	9,7	50	54	94	10	4					121,00	10415	121,00	10415
10,0	2,00	21,0	9,7	50	54	94	10	4					121,00	10420	121,00	10420
12,0	0,20	26,0	11,6	36	38	83	12	4	162,40	12202	162,40	12202				
12,0	0,50	26,0	11,6	36	38	83	12	4	162,40	12205	162,40	12205				
12,0	1,00	26,0	11,6	36	38	83	12	4	162,40	12210	162,40	12210				

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

→ v_c/f_z Page 392+393

Continued on next page

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

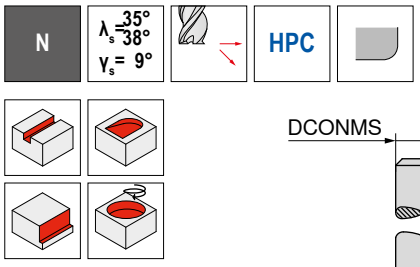

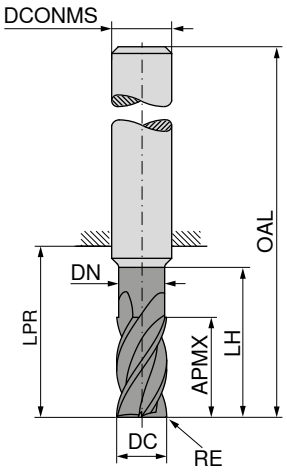

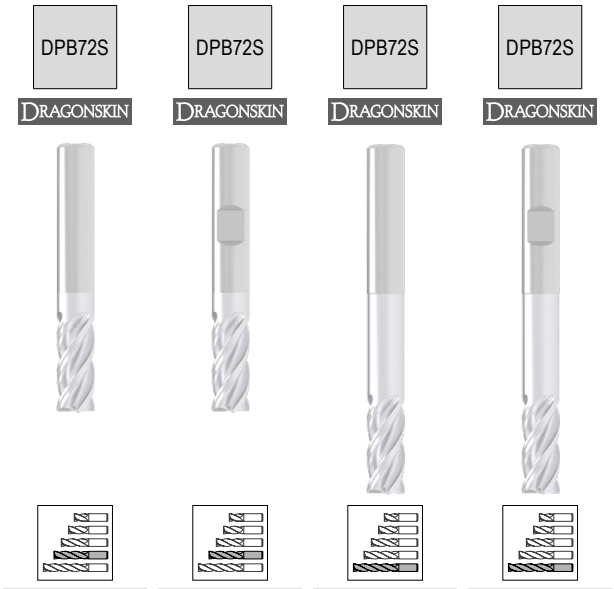

Factory standard | Factory standard | Factory standard | Factory standard

DC f8	RE ±0,05	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	50 970 ... EUR V0/5A		50 971 ... EUR V0/5A		50 970 ... EUR V0/5A		50 971 ... EUR V0/5A	
mm	mm	mm	mm	mm	mm	mm	mm									
12,0	1,50	26,0	11,6	36	38	83	12	4	162,40	12215	162,40	12215				
12,0	2,00	26,0	11,6	36	38	83	12	4	162,40	12220	162,40	12220				
12,0	3,00	26,0	11,6	36	38	83	12	4	162,40	12230	162,40	12230				
12,0	4,00	26,0	11,6	36	38	83	12	4	162,40	12240	162,40	12240				
12,0	0,50	25,0	11,6	60	64	109	12	4					183,80	12405	183,80	12405
12,0	1,00	25,0	11,6	60	64	109	12	4					183,80	12410	183,80	12410
12,0	1,50	25,0	11,6	60	64	109	12	4					183,80	12415	183,80	12415
12,0	2,00	25,0	11,6	60	64	109	12	4					183,80	12420	183,80	12420
12,0	3,00	25,0	11,6	60	64	109	12	4					183,80	12430	183,80	12430
12,0	4,00	25,0	11,6	60	64	109	12	4					183,80	12440	183,80	12440
14,0	0,30	26,0	13,6	36	38	83	14	4	245,50	14203	245,50	14203				
14,0	1,00	26,0	13,6	36	38	83	14	4	245,50	14210	245,50	14210				
14,0	2,00	26,0	13,6	36	38	83	14	4	245,50	14220	245,50	14220				
14,0	3,00	26,0	13,6	36	38	83	14	4	245,50	14230	245,50	14230				
14,0	4,00	26,0	13,6	36	38	83	14	4	245,50	14240	245,50	14240				
14,0	1,00	29,0	13,6	70	74	119	14	4					275,40	14410	275,40	14410
14,0	2,00	29,0	13,6	70	74	119	14	4					275,40	14420	275,40	14420
14,0	3,00	29,0	13,6	70	74	119	14	4					275,40	14430	275,40	14430
14,0	4,00	29,0	13,6	70	74	119	14	4					275,40	14440	275,40	14440
16,0	0,30	36,0	15,5	42	44	92	16	4	245,50	16203	245,50	16203				
16,0	1,00	36,0	15,5	42	44	92	16	4	245,50	16210	245,50	16210				
16,0	2,00	36,0	15,5	42	44	92	16	4	245,50	16220	245,50	16220				
16,0	3,00	36,0	15,5	42	44	92	16	4	245,50	16230	245,50	16230				
16,0	4,00	36,0	15,5	42	44	92	16	4	245,50	16240	245,50	16240				
16,0	1,00	33,0	15,5	80	84	132	16	4					302,10	16410	302,10	16410
16,0	2,00	33,0	15,5	80	84	132	16	4					302,10	16420	302,10	16420
16,0	3,00	33,0	15,5	80	84	132	16	4					302,10	16430	302,10	16430
16,0	4,00	33,0	15,5	80	84	132	16	4					302,10	16440	302,10	16440
18,0	1,00	36,0	17,5	42	44	92	18	4	326,60	18210	326,60	18210				
18,0	2,00	36,0	17,5	42	44	92	18	4	326,60	18220	326,60	18220				
18,0	3,00	36,0	17,5	42	44	92	18	4	326,60	18230	326,60	18230				
18,0	4,00	36,0	17,5	42	44	92	18	4	326,60	18240	326,60	18240				
18,0	1,00	38,0	17,5	90	94	142	18	4					364,40	18410	364,40	18410
18,0	2,00	38,0	17,5	90	94	142	18	4					364,40	18420	364,40	18420
18,0	3,00	38,0	17,5	90	94	142	18	4					364,40	18430	364,40	18430
18,0	4,00	38,0	17,5	90	94	142	18	4					364,40	18440	364,40	18440
20,0	0,30	41,0	19,5	52	54	104	20	4	367,80	20203	367,80	20203				
20,0	1,00	41,0	19,5	52	54	104	20	4	367,80	20210	367,80	20210				
20,0	2,00	41,0	19,5	52	54	104	20	4	367,80	20220	367,80	20220				
20,0	3,00	41,0	19,5	52	54	104	20	4	367,80	20230	367,80	20230				
20,0	4,00	41,0	19,5	52	54	104	20	4	367,80	20240	367,80	20240				
20,0	1,00	42,0	19,5	100	104	154	20	4					409,60	20410	409,60	20410
20,0	2,00	42,0	19,5	100	104	154	20	4					409,60	20420	409,60	20420
20,0	3,00	42,0	19,5	100	104	154	20	4					409,60	20430	409,60	20430
20,0	4,00	42,0	19,5	100	104	154	20	4					409,60	20440	409,60	20440

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

→ v_c/f_z Page 392+393

SilverLine – End milling cutter

The all-rounder for universal application

N | λ_s = 37° 38° | γ_s = 9° | HPC



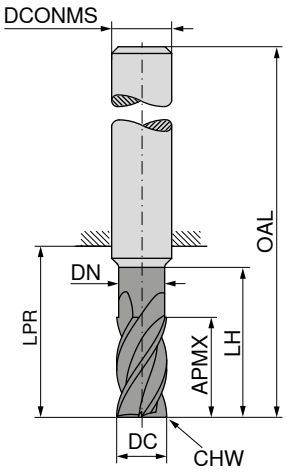

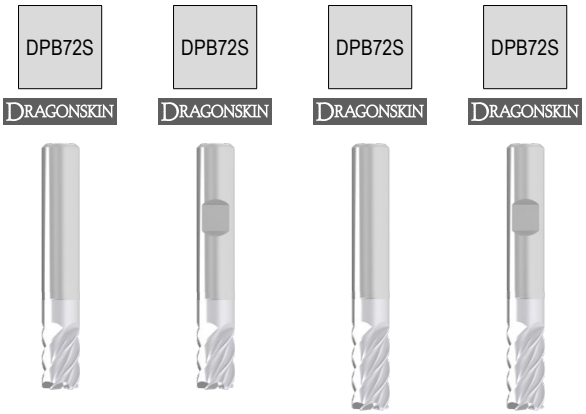

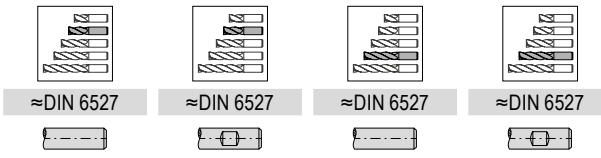

									≈DIN 6527		≈DIN 6527		≈DIN 6527		≈DIN 6527	
									50 993 ...		**50 995 ...**		**50 994 ...**		**50 996 ...**	
DC $_{e8}$ **mm**	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	EUR V0/5A		EUR V0/5A		EUR V0/5A		EUR V0/5A	
6	10			18	54	6	0,1	5	54,57	**06100**	54,57	**06100**				
6	13	5,8	19	21	57	6	0,1	5					54,10	**06200**	54,10	**06200**
8	12			22	58	8	0,2	5	72,56	**08100**	72,56	**08100**				
8	21	7,7	25	27	63	8	0,2	5					73,78	**08200**	73,78	**08200**
10	14			26	66	10	0,2	5	94,68	**10100**	94,68	**10100**				
10	22	9,7	30	32	72	10	0,2	5					108,00	**10200**	108,00	**10200**
12	16			28	73	12	0,3	5	124,10	**12100**	124,10	**12100**				
12	26	11,6	36	38	83	12	0,3	5					131,40	**12200**	131,40	**12200**
16	22			34	82	16	0,3	5	237,60	**16100**	237,60	**16100**				
16	36	15,5	42	44	92	16	0,3	5					305,30	**16200**	305,30	**16200**
20	26			42	92	20	0,3	5	366,50	**20100**	366,50	**20100**				
20	41	19,5	52	54	104	20	0,3	5					417,80	**20200**	417,80	**20200**
P									●		●		●		●	
M									●		●		●		●	
K									●		●		●		●	
N									○		○		○		○	
S									●		●		●		●	
H																
O																

→ v_c/f_z Page 380

SilverLine – End milling cutter

The all-rounder for universal application

▲ Cutting depth: 3 x DC





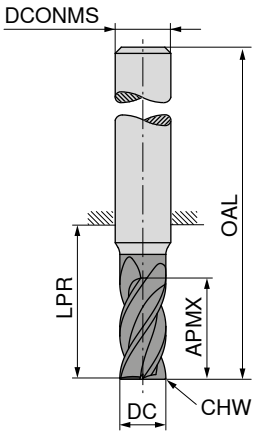

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	≈DIN 6527 50 999 ... EUR V0/5A	≈DIN 6527 50 949 ... EUR V0/5A
6	19	26	62	6	0,1	5	64,92 **06200**	64,92 **06200**
8	25	32	68	8	0,2	5	88,56 **08200**	88,56 **08200**
10	31	40	80	10	0,2	5	129,70 **10200**	129,70 **10200**
12	37	48	93	12	0,3	5	157,70 **12200**	157,70 **12200**
16	49	60	108	16	0,3	5	366,40 **16200**	366,40 **16200**
20	61	76	126	20	0,3	5	501,30 **20200**	501,30 **20200**

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

→ v_c/f_z Page 381–383

SilverLine – End milling cutter with corner radius

The all-rounder for universal application

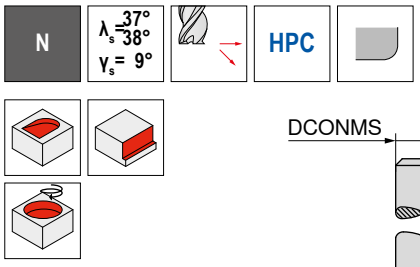

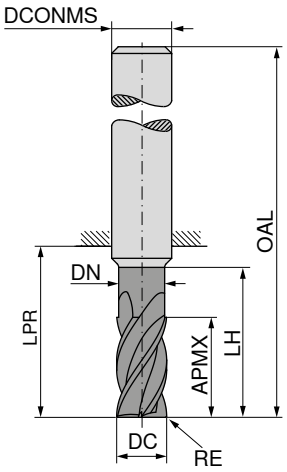

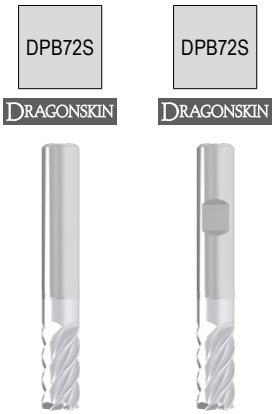

Factory standard

Factory standard

DC h8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 997 ... EUR V0/5A		50 998 ... EUR V0/5A	
6	0,2	13	5,8	19	21	57	6	5	77,84	06202	77,84	06202
6	0,5	13	5,8	19	21	57	6	5	77,84	06205	77,84	06205
6	1,0	13	5,8	19	21	57	6	5	77,84	06210	77,84	06210
8	0,2	21	7,7	25	27	63	8	5	97,61	08202	97,61	08202
8	0,5	21	7,7	25	27	63	8	5	97,61	08205	97,61	08205
8	1,0	21	7,7	25	27	63	8	5	97,61	08210	97,61	08210
8	1,5	21	7,7	25	27	63	8	5	97,61	08215	97,61	08215
10	0,2	22	9,7	30	32	72	10	5	122,00	10202	122,00	10202
10	0,5	22	9,7	30	32	72	10	5	122,00	10205	122,00	10205
10	1,0	22	9,7	30	32	72	10	5	122,00	10210	122,00	10210
10	1,5	22	9,7	30	32	72	10	5	122,00	10215	122,00	10215
10	1,6	22	9,7	30	32	72	10	5	122,00	10216	122,00	10216
10	2,0	22	9,7	30	32	72	10	5	122,00	10220	122,00	10220
12	0,3	26	11,6	36	38	83	12	5	188,40	12203	188,40	12203
12	0,5	26	11,6	36	38	83	12	5	188,40	12205	188,40	12205
12	1,0	26	11,6	36	38	83	12	5	188,40	12210	188,40	12210
12	1,5	26	11,6	36	38	83	12	5	188,40	12215	188,40	12215
12	1,6	26	11,6	36	38	83	12	5	188,40	12216	188,40	12216
12	2,0	26	11,6	36	38	83	12	5	188,40	12220	188,40	12220
12	2,5	26	11,6	36	38	83	12	5	188,40	12225	188,40	12225
16	0,3	36	15,5	42	44	92	16	5	284,80	16203	284,80	16203
16	0,5	36	15,5	42	44	92	16	5	284,80	16205	284,80	16205
16	1,0	36	15,5	42	44	92	16	5	284,80	16210	284,80	16210
16	1,5	36	15,5	42	44	92	16	5	284,80	16215	284,80	16215
16	1,6	36	15,5	42	44	92	16	5	284,80	16216	284,80	16216
16	2,0	36	15,5	42	44	92	16	5	284,80	16220	284,80	16220
16	2,5	36	15,5	42	44	92	16	5	284,80	16225	284,80	16225
16	3,0	36	15,5	42	44	92	16	5	284,80	16230	284,80	16230
20	0,3	41	19,5	52	54	104	20	5	426,60	20203	426,60	20203
20	0,5	41	19,5	52	54	104	20	5	426,60	20205	426,60	20205
20	1,0	41	19,5	52	54	104	20	5	426,60	20210	426,60	20210
20	1,5	41	19,5	52	54	104	20	5	426,60	20215	426,60	20215
20	1,6	41	19,5	52	54	104	20	5	426,60	20216	426,60	20216
20	2,0	41	19,5	52	54	104	20	5	426,60	20220	426,60	20220
20	2,5	41	19,5	52	54	104	20	5	426,60	20225	426,60	20225
20	3,0	41	19,5	52	54	104	20	5	426,60	20230	426,60	20230
20	4,0	41	19,5	52	54	104	20	5	426,60	20240	426,60	20240

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

→ v_c/f_z Page 380

SilverLine – Roughing-Finishing Cutter

The all-rounder for universal application

▲ With rough-finishing profile





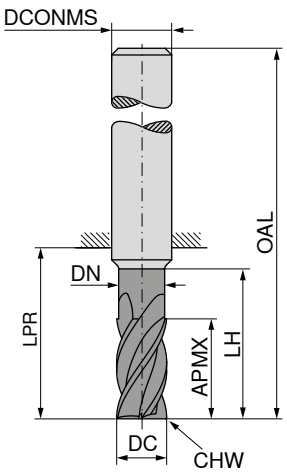

DPB72S

DRAGONSKIN

DIN 6527

50 969 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V0/5A	
3,0	8	2,8	13	21	57	6	0,1	4	85,10	**03200**
3,5	11	3,3	17	21	57	6	0,1	4	85,10	**03700**
4,0	11	3,8	17	21	57	6	0,1	4	85,10	**04200**
4,5	13	4,3	19	21	57	6	0,1	4	85,10	**04700**
5,0	13	4,8	19	21	57	6	0,1	4	85,10	**05200**
5,5	13	5,3	19	21	57	6	0,1	4	85,10	**05700**
6,0	13	5,8	19	21	57	6	0,1	4	85,10	**06200**
7,0	21	6,7	25	27	63	8	0,2	4	90,69	**07200**
8,0	21	7,7	25	27	63	8	0,2	4	90,69	**08200**
9,0	22	8,7	30	32	72	10	0,2	4	112,70	**09200**
10,0	22	9,7	30	32	72	10	0,2	4	112,70	**10200**
11,0	26	10,6	36	38	83	12	0,3	4	178,10	**11200**
12,0	26	11,6	36	38	83	12	0,3	4	178,10	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	228,90	**14200**
15,0	36	14,5	42	44	92	16	0,3	4	282,80	**15200**
16,0	36	15,5	42	44	92	16	0,3	4	282,80	**16200**
17,0	36	16,5	42	44	92	18	0,3	4	334,10	**17200**
18,0	36	17,5	42	44	92	18	0,3	4	334,10	**18200**
19,0	41	18,5	52	54	104	20	0,3	4	436,20	**19200**
20,0	41	19,5	52	54	104	20	0,3	4	436,20	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 392+393

SilverLine – Rough milling cutter

The all-rounder for universal application

▲ With roughing profile





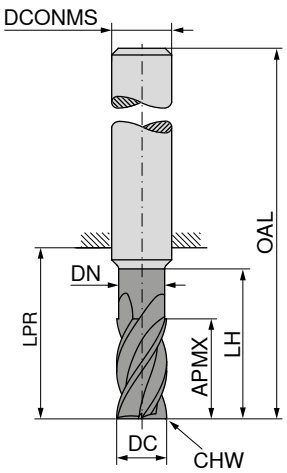

DPB72S

DRAGONSKIN

DIN 6527

50 979 ...

DC $_{d11}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	EUR V0/5A	
3,0	8	2,8	13	21	57	6	0,1	4	85,10	**03200**
3,5	11	3,3	17	21	57	6	0,1	4	85,10	**03700**
4,0	11	3,8	17	21	57	6	0,1	4	85,10	**04200**
4,5	13	4,3	19	21	57	6	0,1	4	85,10	**04700**
5,0	13	4,8	19	21	57	6	0,1	4	85,10	**05200**
5,5	13	5,3	19	21	57	6	0,1	4	85,10	**05700**
6,0	13	5,8	19	21	57	6	0,1	4	85,10	**06200**
7,0	21	6,7	25	27	63	8	0,2	4	90,69	**07200**
8,0	21	7,7	25	27	63	8	0,2	4	90,69	**08200**
9,0	22	8,7	30	32	72	10	0,2	4	112,70	**09200**
10,0	22	9,7	30	32	72	10	0,2	4	112,70	**10200**
11,0	26	10,6	36	38	83	12	0,3	4	178,10	**11200**
12,0	26	11,6	36	38	83	12	0,3	4	178,10	**12200**
14,0	26	13,6	36	38	83	14	0,3	4	228,90	**14200**
15,0	36	14,5	42	44	92	16	0,3	4	282,80	**15200**
16,0	36	15,5	42	44	92	16	0,3	4	282,80	**16200**
17,0	36	16,5	42	44	92	18	0,3	4	334,10	**17200**
18,0	36	17,5	42	44	92	18	0,3	4	334,10	**18200**
19,0	41	18,5	52	54	104	20	0,3	4	436,20	**19200**
20,0	41	19,5	52	54	104	20	0,3	4	436,20	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c/f_z Page 392+393

SilverLine – High Accuracy Finish Milling Cutter

The all-rounder for universal application

▲ max. taper of 0.008 mm for high precision and parallelism of vertical walls
▲ Tool with cutting edge correction



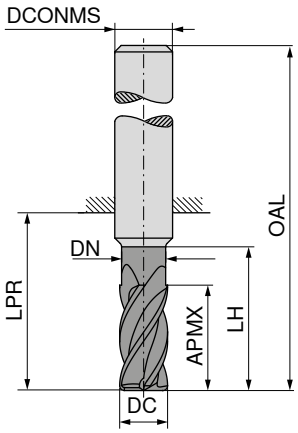

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 991 ... ≈DIN 6527 EUR V0/5A		50 991 ... Factory standard EUR V0/5A	
6,0	10	5,8	18	22	58	6	6	74,72	**06200**		
6,0	13	5,6	19	21	57	6	6	74,69	**06700**		
6,0	13	5,8	27	31	67	6	6			101,30	**06400**
6,0	13	5,8	36	40	76	6	6			126,60	**06900**
6,0	15	5,6	42	44	80	6	6			101,30	**90000**
8,0	13	7,7	24	28	64	8	6	85,46	**08200**		
8,0	17	7,7	36	40	76	8	6			125,30	**08400**
8,0	17	7,7	48	53	89	8	6			156,70	**08900**
8,0	19	7,6	25	27	63	8	6	85,79	**08700**		
8,0	20	7,6	62	64	100	8	6			125,20	**90100**
10,0	16	9,7	30	34	74	10	6	147,30	**10200**		
10,0	21	9,7	45	49	89	10	6			187,90	**10400**
10,0	21	9,7	60	64	104	10	6			234,70	**90200**
10,0	22	9,6	30	32	72	10	6	147,00	**10700**		
10,0	25	9,6	58	60	100	10	6			187,30	**10900**
12,0	19	11,6	36	40	85	12	6	199,70	**12200**		
12,0	25	11,6	54	58	103	12	6			290,80	**12400**
12,0	25	11,6	72	76	121	12	6			363,30	**90300**
12,0	26	11,5	36	38	83	12	6	199,20	**12700**		
12,0	30	11,5	73	75	120	12	6			290,40	**12900**
16,0	25	15,5	48	52	100	16	6	371,40	**16200**		
16,0	32	15,0	42	44	92	16	6	371,30	**16700**		
16,0	33	15,5	72	76	124	16	6			511,70	**16400**
16,0	33	15,5	96	100	148	16	6			639,50	**16900**
16,0	40	15,0	100	102	150	16	6			511,20	**90400**
20,0	32	19,5	60	64	114	20	6	535,30	**20200**		
20,0	38	19,0	52	54	104	20	6	535,00	**20700**		
20,0	42	19,5	90	94	144	20	6			704,60	**20400**
20,0	42	19,5	120	124	174	20	6			880,70	**90500**
20,0	50	19,0	98	100	150	20	6			704,30	**20900**
25,0	40	24,5	75	80	136	25	6	670,30	**25200**		
25,0	52	24,5	113	118	174	25	6			881,60	**25400**
25,0	52	24,5	150	154	210	25	6			1.102,00	**25900**

P	●	●
M	●	●
K	○	○
N	○	○
S	●	●
H		
O		

→ v_c/f_z Page 394

SilverLine – Ball Nosed Cutter

The all-rounder for universal application

N | λ_s=30° γ_s= 6°

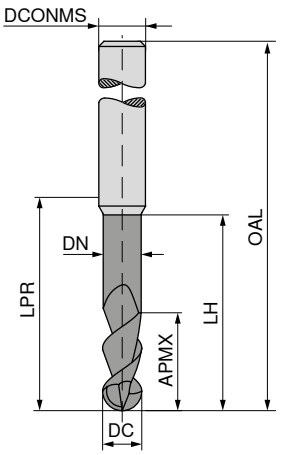

Factory standard

Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	50 963 ... EUR V0/5A		50 963 ... EUR V0/5A	
3,0	4	2,8	10,0	14	50	6	2	63,77	**03115**		
3,0	7	3,0	8,8	24	60	6	2			85,54	**03415**
4,0	8	3,8	12,0	18	54	6	2	63,77	**04120**		
4,0	10	4,0	12,5	39	75	6	2			85,54	**04420**
5,0	9	4,8	16,0	18	54	6	2	63,77	**05125**		
5,0	12	5,0	15,0	39	75	6	2			88,99	**05425**
6,0	10	5,7	16,0	18	54	6	2	63,77	**06130**		
6,0	12	6,0	15,0	64	100	6	2			103,00	**06430**
7,0	11	6,6	20,0	22	58	8	2	77,62	**07135**		
8,0	12	7,6	20,0	22	58	8	2	77,62	**08140**		
8,0	14	8,0	17,5	64	100	8	2			120,50	**08440**
10,0	14	9,6	24,0	26	66	10	2	97,05	**10150**		
10,0	18	10,0	22,5	60	100	10	2			163,70	**10450**
12,0	16	11,5	26,0	28	73	12	2	141,10	**12160**		
12,0	22	12,0	27,5	55	100	12	2			211,20	**12460**
14,0	18	13,3	28,0	30	75	14	2	163,70	**14170**		
14,0	26	14,0	32,5	75	120	14	2			336,80	**14470**
16,0	22	15,2	32,0	34	82	16	2	207,80	**16180**		
16,0	30	16,0	37,5	102	150	16	2			453,90	**16480**
18,0	24	17,1	34,0	36	84	18	2	342,30	**18190**		
20,0	26	19,0	40,0	42	92	20	2	342,30	**20110**		
20,0	38	20,0	47,5	100	150	20	2			601,50	**20410**

P	●	●
M		
K	●	●
N	○	○
S		
H	○	○
O		

→ v_c/f_z Page 398+399

SilverLine – Ball Nosed Cutter

The all-rounder for universal application



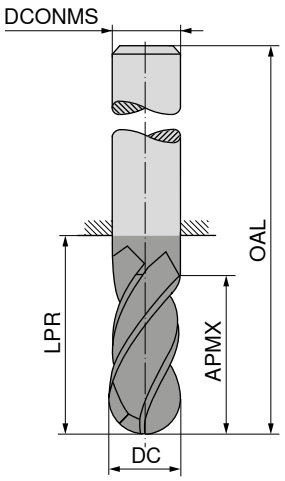

DPB72S

DRAGONSKIN

Factory standard

50 990 ...

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0/5A	
4,0	11	21	57	6	4	62,10	**04220**
5,0	13	21	57	6	4	62,10	**05225**
6,0	13	21	57	6	4	72,63	**06230**
8,0	19	36	72	8	4	90,01	**08280**
10,0	22	32	72	10	4	113,60	**10250**
12,0	26	38	83	12	4	179,80	**12260**
16,0	32	44	92	16	4	265,40	**16280**
20,0	38	54	104	20	4	384,50	**20210**

P	●
M	○
K	●
N	○
S	
H	
O	

→ v_c/f_z Page 395–397

SilverLine – Torus Face Milling Cutter

The all-rounder for universal application

▲ APMX does not correspond to the maximum cutting depth

▲ r_{3D} = corner radius to be programmed

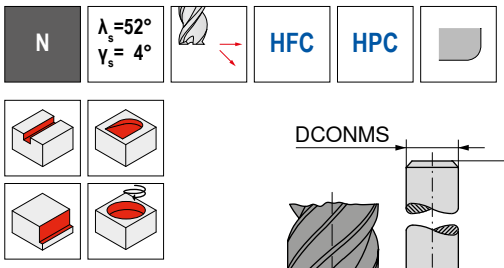

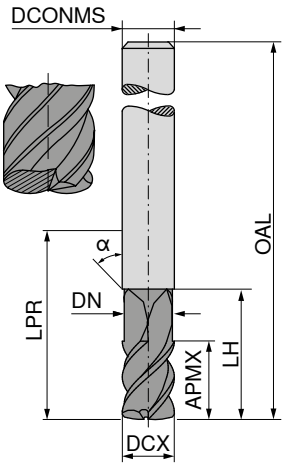

Factory standard | Factory standard

DCX f8 mm	r_{3D} mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	50 989 ... EUR V0/5A		50 989 ... EUR V0/5A	
6,00	1,12	6	5,5	21	21	57	45	6	4	89,81	**06110**		
6,00	1,12	6	5,5	64	64	100	45	6	4			118,70	**06410**
8,00	1,23	8	7,4	27	27	63	45	8	4	101,80	**08110**		
8,00	1,23	8	7,4	64	64	100	45	8	4			154,80	**08410**
10,00	1,17	10	9,2	32	32	72	45	10	4	174,00	**10115**		
10,00	1,17	10	9,2	60	60	100	45	10	4			254,60	**10415**
12,00	1,86	12	11,0	32	38	83	45	12	4	228,10	**12115**		
12,00	1,86	12	11,0	65	65	110	45	12	4			280,90	**12415**
16,00	2,47	16	15,0	38	44	92	45	16	4	428,50	**16120**		
16,00	2,47	16	15,0	65	102	150	45	16	4			626,40	**16420**
20,00	2,61	20	18,5	40	42	92	45	20	4	616,50	**20120**		
20,00	2,61	20	18,5	65	100	150	45	20	4			926,80	**20420**
P										●		●	
M										○		○	
K										●		●	
N										○		○	
S													
H										○		○	
O													

→ v_c/f_z Page 400+401

SilverLine – NC deburring cutter

The all-rounder for universal application

▲ Point angle α = 60°

N

λ_s=0°
γ_s=5°



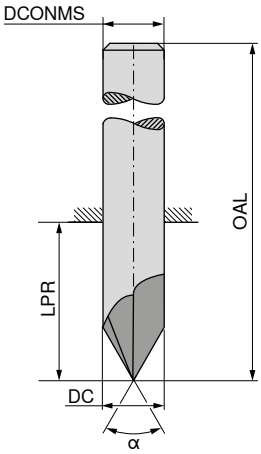

DPB72S DRAGONSKIN

DPB72S DRAGONSKIN

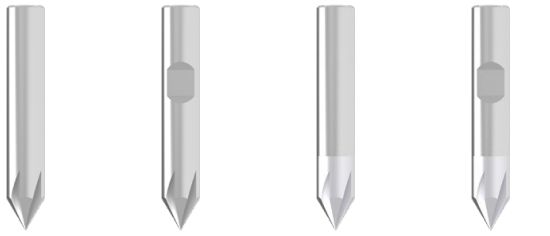

	α = 60° Factory standard	α = 60° Factory standard	α = 60° Factory standard	α = 60° Factory standard
	50 566 ...	**50 567 ...**	**50 562 ...**	**50 563 ...**
DC mm	EUR V1	EUR V1	EUR V1	EUR V1
4	39,99 **04000**		49,34 **04000**	
6	44,87 **06000**	44,87 **06000**	54,22 **06000**	54,22 **06000**
8	59,96 **08000**	59,96 **08000**	70,65 **08000**	70,65 **08000**
10	71,16 **10000**	71,16 **10000**	83,97 **10000**	83,97 **10000**
12	92,72 **12000**	92,72 **12000**	107,30 **12000**	107,30 **12000**
16	147,40 **16000**	147,40 **16000**	167,10 **16000**	167,10 **16000**

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N				
S	●	●	●	●
H				
O				

→ v_c/f_z Page 379

SilverLine – NC deburring cutter

The all-rounder for universal application

▲ High performance 5 flute chamfering tool

N

λ_s=0°
γ_s=5°

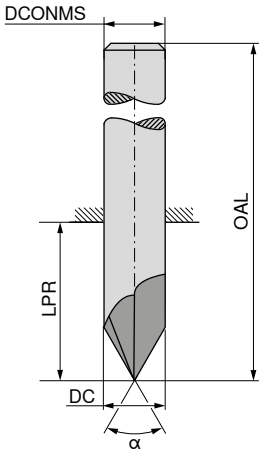

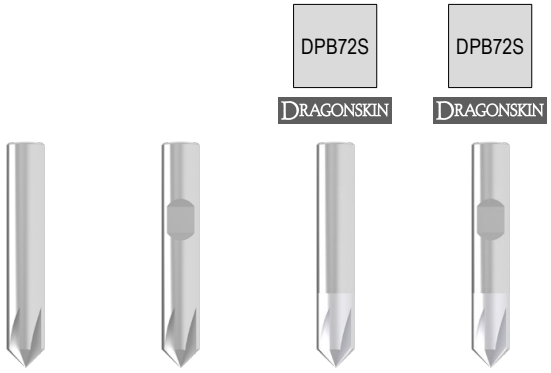

DC mm	OAL mm	LPR mm	DCONMS mm	ZEFP	α = 90° Factory standard 50 564 ... EUR V1		α = 90° Factory standard 50 565 ... EUR V1		α = 90° Factory standard 50 560 ... EUR V1		α = 90° Factory standard 50 561 ... EUR V1	
4	50	22	4	5	39,99	**04000**			49,34	**04000**		
6	55	19	6	5	44,87	**06000**	44,87	**06000**	54,22	**06000**	54,22	**06000**
8	58	22	8	5	59,96	**08000**	59,96	**08000**	70,65	**08000**	70,65	**08000**
10	60	20	10	5	71,16	**10000**	71,16	**10000**	83,97	**10000**	83,97	**10000**
12	70	25	12	5	92,72	**12000**	92,72	**12000**	107,30	**12000**	107,30	**12000**
16	80	32	16	5	147,40	**16000**	147,40	**16000**	167,10	**16000**	167,10	**16000**

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N				
S	●	●	●	●
H				
O				

→ v_c/f_z Page 379

S-Cut – End milling cutter

The all-rounder with soft cut and low power consumption

SC UNI | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



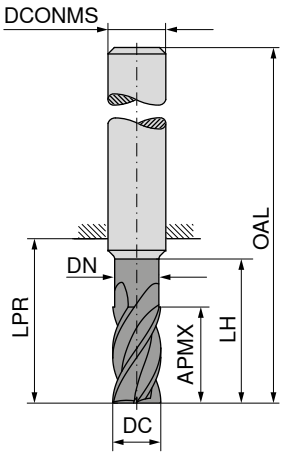

APX72S

≈DIN 6527

52 225 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/1#	
3	8	2,8	15,0	21	57	6	4	53,31	**030**
4	11	3,8	16,5	21	57	6	4	53,31	**040**
5	13	4,8	18,5	21	57	6	4	53,31	**050**
6	13	5,5	21,0	21	57	6	4	53,31	**060**
8	19	7,5	27,0	27	63	8	4	71,55	**080**
10	22	9,5	32,0	32	72	10	4	101,50	**100**
12	26	11,5	38,0	38	83	12	4	141,30	**120**
14	26	13,5	38,0	38	83	14	4	182,40	**140**
16	36	15,5	44,0	44	92	16	4	228,80	**160**
18	36	17,5	52,0	52	100	18	4	307,10	**180**
20	38	19,5	54,0	54	104	20	4	352,00	**200**
25	42	24,0	65,0	65	121	25	4	559,10	**250**

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c/f_z Page 402+403

14

S-Cut – End milling cutter

The all-rounder with soft cut and low power consumption

SC UNI | λ_s var. | λ_s=28°-36° γ_s=10° | HPC



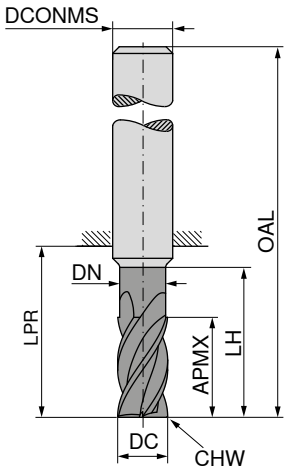

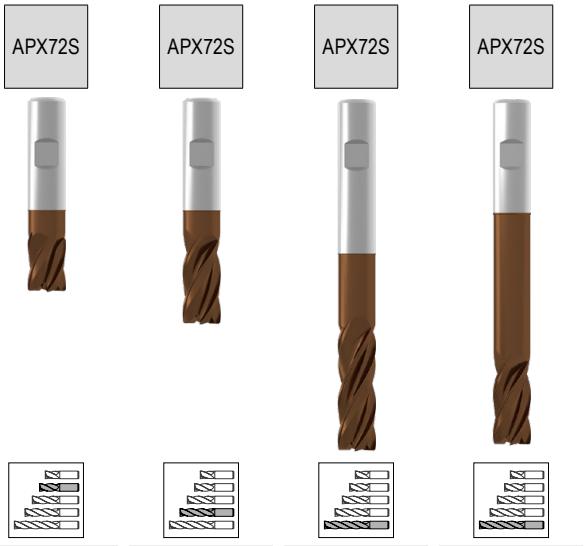

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 223 ... EUR V1/1#		52 224 ... EUR V1/1#		52 226 ... EUR V1/1#		52 227 ... EUR V1/1#	
3	6	2,8	12,0	18	54	6	0,10	4	44,04	030						
3	8	2,8	15,0	21	57	6	0,10	4			53,31	030				
4	8	3,8	13,5	18	54	6	0,13	4	44,04	040						
4	11	3,8	16,5	21	57	6	0,13	4			53,31	040				
5	9	4,8	15,5	18	54	6	0,18	4	44,04	050						
5	13	4,8	18,5	21	57	6	0,18	4			53,31	050				
5	22	4,8	24,5	27	63	6	0,18	4					64,90	050		
6	10	5,5	18,0	18	54	6	0,20	4	44,04	060						
6	13	5,5	21,0	21	57	6	0,20	4			53,31	060				
6	13	5,5	42,0	44	80	6	0,20	4							81,54	060
6	22	5,5	27,0	27	63	6	0,20	4					64,90	060		
7	12	6,5	22,0	22	58	8	0,20	4	61,73	070						
7	19	6,5	27,0	27	63	8	0,20	4			73,74	070				
8	12	7,5	22,0	22	58	8	0,20	4	59,81	080						
8	19	7,5	27,0	27	63	8	0,20	4			71,55	080				
8	21	7,5	62,0	64	100	8	0,20	4							96,47	080
8	28	7,5	36,0	44	80	8	0,20	4					79,83	080		
9	14	8,5	26,0	26	66	10	0,30	4	84,15	090						
9	22	8,5	32,0	32	72	10	0,20	4			104,70	090				
10	14	9,5	26,0	26	66	10	0,30	4	81,54	100						
10	22	9,5	32,0	32	72	10	0,30	4			101,50	100				
10	22	9,5	58,0	60	100	10	0,30	4							119,80	100
10	33	9,5	54,0	60	100	10	0,30	4					103,10	100		
11	16	10,5	28,0	28	73	12	0,30	4	125,20	110						
11	26	10,5	38,0	38	83	12	0,30	4			146,30	110				
12	16	11,5	28,0	28	73	12	0,30	4	121,40	120						
12	26	11,5	38,0	38	83	12	0,30	4			141,30	120				
12	26	11,5	73,0	75	120	12	0,30	4							149,30	120
12	42	11,5	54,0	55	100	12	0,30	4					133,20	120		
13	18	12,5	30,0	30	75	14	0,30	4	159,50	130						
13	26	12,5	38,0	38	83	14	0,30	4			188,40	130				
14	18	13,5	30,0	30	75	14	0,30	4	155,00	140						
14	26	13,5	38,0	38	83	14	0,30	4			182,40	140				
14	48	13,5	54,0	55	100	14	0,30	4					149,30	140		
16	22	15,5	34,0	34	82	16	0,40	4	194,30	160						
16	36	15,5	44,0	44	92	16	0,40	4			228,80	160				
16	36	15,5	100,0	102	150	16	0,40	4							260,60	160
16	53	15,5	84,0	102	150	16	0,40	4					244,80	160		
18	24	17,5	34,0	36	84	18	0,40	4	260,60	180						
18	36	17,5	52,0	52	100	18	0,40	4			307,10	180				
20	26	19,5	42,0	42	92	20	0,50	4	302,80	200						
20	38	19,5	54,0	54	104	20	0,50	4			352,00	200				
20	38	19,5	100,0	100	150	20	0,50	4							369,50	200
20	68	19,5	84,0	100	150	20	0,50	4					352,00	200		
25	32	24,0	46,0	49	105	25	0,50	4	478,20	250						
25	42	24,0	65,0	65	121	25	0,50	4			559,10	250				
25	68	24,0	84,0	94	150	25	0,50	4					647,50	250		

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O				

→ v_c/f_z Page 402–405

S-Cut – End milling cutter with corner radius

The all-rounder with soft cut and low power consumption

SC UNI | λ_s var. | λ_s=28°-36° γ_s=10° | HPC



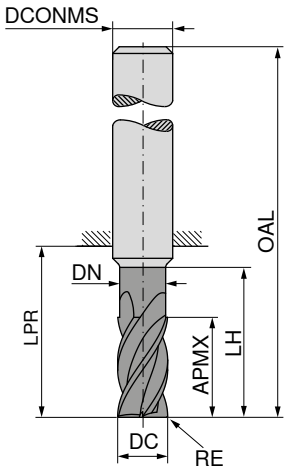

APX72S

≈DIN 6527

52 228 ...

DC $_{f8}$ mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR V1/1#	
3	0,25	8	2,8	15,0	21	57	6	4	53,31	03003
3	0,50	8	2,8	15,0	21	57	6	4	53,31	03005
3	1,00	8	2,8	15,0	21	57	6	4	53,31	03010
4	0,25	11	3,8	16,5	21	57	6	4	53,31	04003
4	0,50	11	3,8	16,5	21	57	6	4	53,31	04005
4	1,00	11	3,8	16,5	21	57	6	4	53,31	04010
5	0,50	13	4,8	18,5	21	57	6	4	53,31	05005
5	1,00	13	4,8	18,5	21	57	6	4	53,31	05010
5	1,50	13	4,8	18,5	21	57	6	4	53,31	05015
6	0,50	13	5,5	21,0	21	57	6	4	53,31	06005
6	0,80	13	5,5	21,0	21	57	6	4	53,31	06008
6	1,00	13	5,5	21,0	21	57	6	4	53,31	06010
6	1,50	13	5,5	21,0	21	57	6	4	53,31	06015
6	2,00	13	5,5	21,0	21	57	6	4	53,31	06020
8	0,50	19	7,5	27,0	27	63	8	4	71,55	08005
8	0,80	19	7,5	27,0	27	63	8	4	71,55	08008
8	1,00	19	7,5	27,0	27	63	8	4	71,55	08010
8	1,50	19	7,5	27,0	27	63	8	4	71,55	08015
8	2,00	19	7,5	27,0	27	63	8	4	71,55	08020
10	0,50	22	9,5	32,0	32	72	10	4	101,50	10005
10	1,00	22	9,5	32,0	32	72	10	4	101,50	10010
10	1,50	22	9,5	32,0	32	72	10	4	101,50	10015
10	1,60	22	9,5	32,0	32	72	10	4	101,50	10016
10	2,00	22	9,5	32,0	32	72	10	4	101,50	10020
12	0,50	26	11,5	38,0	38	83	12	4	141,30	12005
12	1,00	26	11,5	38,0	38	83	12	4	141,30	12010
12	1,50	26	11,5	38,0	38	83	12	4	141,30	12015
12	1,60	26	11,5	38,0	38	83	12	4	141,30	12016
12	2,00	26	11,5	38,0	38	83	12	4	141,30	12020
12	3,00	26	11,5	38,0	38	83	12	4	141,30	12030
16	1,00	36	15,5	44,0	44	92	16	4	228,80	16010
16	1,50	36	15,5	44,0	44	92	16	4	228,80	16015
16	1,60	36	15,5	44,0	44	92	16	4	228,80	16016
16	2,00	36	15,5	44,0	44	92	16	4	228,80	16020
16	2,50	36	15,5	44,0	44	92	16	4	228,80	16025
16	3,00	36	15,5	44,0	44	92	16	4	228,80	16030
20	1,00	38	19,5	54,0	54	104	20	4	352,00	20010
20	1,50	38	19,5	54,0	54	104	20	4	352,00	20015
20	2,00	38	19,5	54,0	54	104	20	4	352,00	20020
20	2,50	38	19,5	54,0	54	104	20	4	352,00	20025
20	3,00	38	19,5	54,0	54	104	20	4	352,00	20030
20	4,00	38	19,5	54,0	54	104	20	4	352,00	20040

P	●
M	●
K	●
N	○
S	○
H	○
O	

→ v_c/f_z Page 402+403

14

S-Cut – End milling cutter

The all-rounder with soft cut and low power consumption

▲ Suitable for trochoidal milling
▲ With chip breaker

SC UNI | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



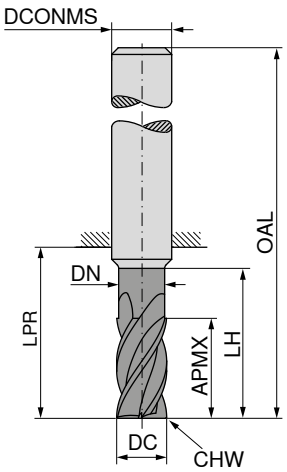

APX72S

≈DIN 6527

52 230 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1/1#	
6	18	5,5	25	26	62	6	0,12	5	79,09	**060**
8	24	7,5	30	32	68	8	0,16	5	104,70	**080**
10	30	9,5	35	40	80	10	0,20	5	133,20	**100**
12	36	11,5	45	48	93	12	0,24	5	175,30	**120**
16	48	15,5	55	60	108	16	0,32	5	299,80	**160**
20	60	19,5	70	76	126	20	0,40	5	472,30	**200**

P	●
M	●
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 406+407

S-Cut – Rough milling cutter

The all-rounder with soft cut and low power consumption

▲ With roughing profile

SC NR | λ_s var. | λ_s=28° 36° γ_s=10° | HPC



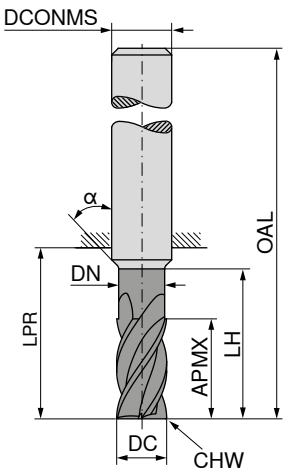





≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC $_{h11}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	α°	ZEFP	52 205 ... EUR V1/1#		52 205 ... EUR V1/1#		52 205 ... EUR V1/1#	
3	6	2,8	12,0	18	54	6	0,18	15	4	86,19	**03100**				
3	8	2,8	14,0	21	57	6	0,18	15	4			102,10	**03200**		
3	8	2,8	19,0	26	62	6	0,18	15	4					116,70	**03400**
4	8	3,8	13,5	18	54	6	0,20	15	4	86,19	**04100**				
4	11	3,8	18,0	21	57	6	0,20	15	4			102,10	**04200**		
4	11	3,8	23,0	26	62	6	0,20	15	4					116,70	**04400**
5	9	4,8	15,5	18	54	6	0,25	15	4	86,19	**05100**				
5	13	4,8	19,0	21	57	6	0,25	15	4			102,10	**05200**		
5	13	4,8	24,0	26	62	6	0,25	15	4					116,70	**05400**
6	10	5,5	18,0	18	54	6	0,25		4	86,19	**06100**				
6	13	5,5	20,0	21	57	6	0,25		4			102,10	**06200**		
6	13	5,5	25,0	26	62	6	0,25		4					116,70	**06400**
8	12	7,5	22,0	22	58	8	0,30		4	109,70	**08100**				
8	19	7,5	25,0	27	63	8	0,30		4			129,80	**08200**		
8	19	7,5	30,0	32	68	8	0,30		4					148,60	**08400**
10	14	9,5	26,0	26	66	10	0,30		4	134,00	**10100**				
10	22	9,5	30,0	32	72	10	0,30		4			158,60	**10200**		
10	22	9,5	35,0	40	80	10	0,30		4					181,40	**10400**
12	16	11,5	28,0	28	73	12	0,45		4	152,00	**12100**				
12	26	11,5	35,0	38	83	12	0,45		4			180,00	**12200**		
12	26	11,5	45,0	48	93	12	0,45		4					205,70	**12400**
14	18	13,5	30,0	30	75	14	0,50		4	204,90	**14100**				
14	26	13,5	35,0	38	83	14	0,50		4			242,60	**14200**		
14	26	13,5	50,0	54	99	14	0,50		4					277,50	**14400**
16	22	15,5	34,0	34	82	16	0,60		4	276,90	**16100**				
16	32	15,5	40,0	44	92	16	0,60		4			328,00	**16200**		
16	32	15,5	55,0	60	108	16	0,60		4					375,00	**16400**
20	26	19,5	42,0	42	92	20	0,60		4	399,80	**20100**				
20	38	19,5	50,0	54	104	20	0,60		4			473,50	**20200**		
20	38	19,5	70,0	76	126	20	0,60		4					541,40	**20400**

P	●	●	●
M	●	●	●
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O			

→ v_c/f_z Page 402–405

14

3D Finish – Barrel shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



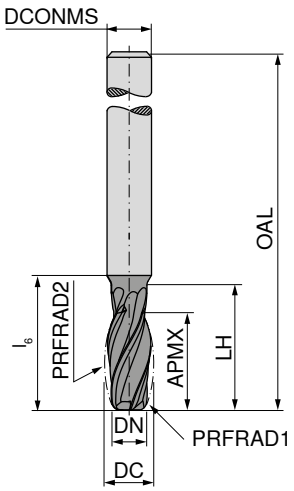

APB72S

DIN 6527

52 739 ...

DC mm	DCONMS h6 mm	DN mm	PRFRAD1 mm	PRFRAD2 mm	LH mm	APMX mm	l_6 mm	OAL mm	ZEFP	EUR V1	
10	10	8	2	50	28	21	30	80	4	181,00	**100**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 408

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

3D Finish – Oval shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



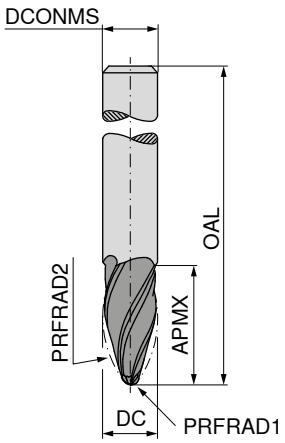

APB72S

DIN 6527

52 745 ...

DC mm	DCONMS h6 mm	PRFRAD1 mm	PRFRAD2 mm	APMX mm	OAL mm	ZEFP	EUR V1	
6	6	1	95	22	62	3	121,50	**060**
8	8	1	90	25	68	3	160,40	**080**
10	10	2	85	26	72	4	181,00	**100**
12	12	2	80	28	83	4	271,40	**120**
16	16	3	75	31	92	4	328,30	**160**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 409

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

3D Finish – Taper shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



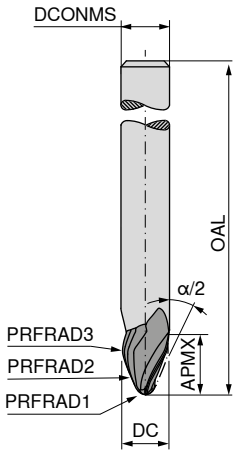



DIN 6527

52 753 ...

DC mm	DCONMS h6 mm	PRFRAD1 mm	PRFRAD2 mm	PRFRAD3 mm	α°/2	APMX mm	OAL mm	ZEFP	EUR V1	
6	6	1,0	250	3	17,5	9,5	62	3	124,10	**060**
8	8	1,5	250	4	20	10,5	68	3	173,40	**080**
10	10	2,0	250	5	20	12,5	80	3	201,80	**100**
12	12	1,0	200	1	42,5	8,0	93	3	258,60	**120**
12	12	3,0	250	6	20	13,5	93	3	258,60	**121**
16	16	2,0	1000	5	12,5	31,0	108	3	336,10	**160**
16	16	4,0	500	8	20	18,5	108	3	336,10	**161**
16	16	4,0	1000	5	12,5	24,0	108	3	336,10	**162**
16	16	4,0	1500	8	20	18,5	108	3	336,10	**163**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 410

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

3D Finish – Taper shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



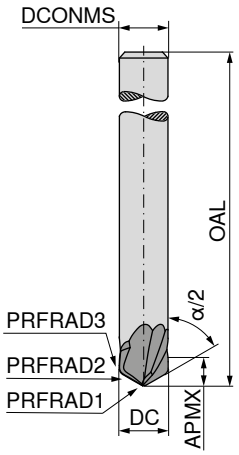

APB72S

DIN 6527

52 755 ...

DC mm	DCONMS h6 mm	PRFRAD1 mm	PRFRAD2 mm	PRFRAD3 mm	α°/2	APMX mm	OAL mm	ZEFP	EUR V1	
10	10	1	200	1,5	60	6	80	2	168,00	**100**
10	10	1	200	2,0	70	6	80	2	168,00	**101**

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v_c/f_z Page 410

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

14

3D Finish – Lens shape

The specialist for 3D finish machining

▲ Geometrical tolerance ± 0.01 mm



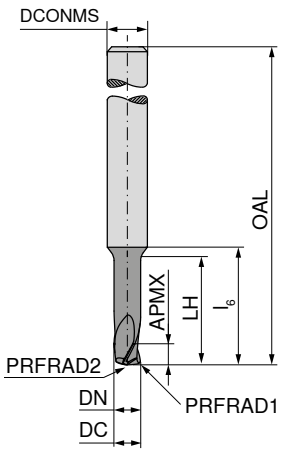

APB72S

DIN 6527

52 756 ...

DC mm	DCONMS h6 mm	DN mm	PRFRAD1 mm	PRFRAD2 mm	LH mm	APMX mm	l6 mm	OAL mm	ZEFP	EUR V1	
4	6	4	0,25	6	18	4	20	62	3	129,30	**040**
6	6		0,50	10		6		62	3	126,70	**060**
8	8		0,75	15		8		68	3	142,20	**080**
10	10		1,00	20		10		80	3	168,00	**100**
12	12		1,25	25		12		93	3	194,00	**120**

P	●
M	●
K	●
N	●
S	●
H	
O	

→ v_c/f_z Page 411

Information on applications and selecting the right product can be found in the Technical Information on → **pages 491+492**.

BlueLine – Micro-end milling cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

H | λ_s=30° γ_s= 0° | ≤ 65 HRC



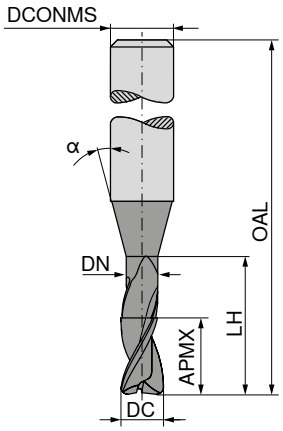

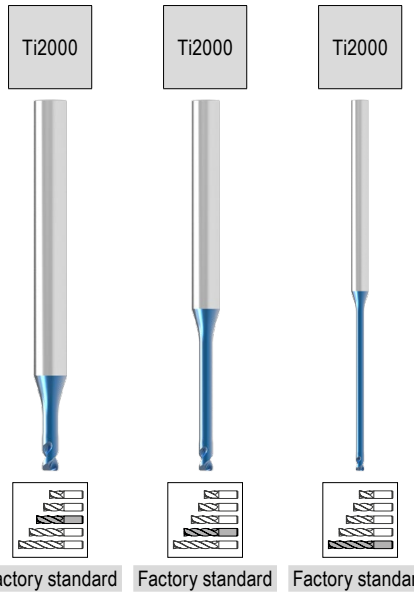

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 345 ... EUR V1		52 346 ... EUR V1		52 347 ... EUR V1	
0,2	0,3	0,18	0,5	45	16	4	2,5 x DC	2	82,41	**302**				
0,2	0,3	0,18	1,0	45	16	4	5 x DC	2	82,41	**402**				
0,2	0,3	0,18	1,5	45	16	4	7,5 x DC	2	82,41	**502**				
0,3	0,4	0,28	1,0	45	16	4	3,3 x DC	2	79,01	**303**				
0,3	0,4	0,28	2,0	45	16	4	6,6 x DC	2	79,01	**403**				
0,3	0,4	0,28	3,0	45	16	4	10 x DC	2			79,01	**303**		
0,3	0,4	0,28	6,0	45	16	4	20 x DC	2			79,01	**403**		
0,3	0,4	0,28	9,0	45	16	4	30 x DC	2					79,01	**303**
0,4	0,6	0,38	2,0	45	16	4	5 x DC	2	77,87	**304**				
0,4	0,6	0,38	3,0	45	16	4	7,5 x DC	2	77,87	**404**				
0,4	0,6	0,38	4,0	45	16	4	10 x DC	2			77,87	**304**		
0,4	0,6	0,38	5,0	45	16	4	12,5 x DC	2			77,87	**404**		
0,4	0,6	0,38	8,0	45	16	4	20 x DC	2					77,87	**304**
0,4	0,6	0,38	12,0	45	16	4	30 x DC	2					80,28	**404**
0,5	0,7	0,48	2,0	45	16	4	4 x DC	2	63,39	**305**				
0,5	0,7	0,48	4,0	45	16	4	8 x DC	2	63,39	**405**				
0,5	0,7	0,48	6,0	45	16	4	12 x DC	2			63,39	**305**		
0,5	0,7	0,48	8,0	45	16	4	16 x DC	2			65,22	**405**		
0,5	0,7	0,48	10,0	50	16	4	20 x DC	2					66,63	**305**
0,5	0,7	0,48	15,0	50	16	4	30 x DC	2					69,92	**405**
0,6	0,9	0,58	2,0	45	16	4	3,3 x DC	2	63,39	**306**				
0,6	0,9	0,58	4,0	45	16	4	6,6 x DC	2	63,39	**406**				
0,6	0,9	0,58	6,0	45	16	4	10 x DC	2			63,39	**306**		
0,6	0,9	0,58	8,0	45	16	4	13,3 x DC	2			65,22	**406**		
0,6	0,9	0,58	10,0	45	16	4	16,6 x DC	2			65,22	**506**		
0,6	0,9	0,58	12,0	50	16	4	20 x DC	2					65,65	**306**
0,6	0,9	0,58	18,0	50	16	4	30 x DC	2					70,36	**406**
0,7	1,0	0,68	2,0	45	16	4	2,8 x DC	2	66,79	**307**				
0,7	1,0	0,68	4,0	45	16	4	5,7 x DC	2	66,79	**407**				
0,7	1,0	0,68	6,0	45	16	4	8,5 x DC	2	66,79	**507**				
0,7	1,0	0,68	8,0	45	16	4	11,4 x DC	2			68,65	**307**		
0,7	1,0	0,68	10,0	50	16	4	14,2 x DC	2			68,65	**407**		
0,8	1,2	0,78	4,0	45	16	4	5 x DC	2	72,74	**308**				
0,8	1,2	0,78	6,0	45	16	4	7,5 x DC	2	72,74	**408**				
0,8	1,2	0,78	8,0	45	16	4	10 x DC	2			72,74	**308**		
0,8	1,2	0,78	10,0	50	16	4	12,5 x DC	2			76,31	**408**		
0,8	1,2	0,78	12,0	50	16	4	15 x DC	2			76,31	**508**		
0,8	1,2	0,78	16,0	50	16	4	20 x DC	2					80,13	**308**
0,8	1,2	0,78	24,0	60	16	4	30 x DC	2					83,55	**408**
0,9	1,3	0,88	4,0	45	16	4	4,4 x DC	2	60,68	**309**				
0,9	1,3	0,88	6,0	45	16	4	6,6 x DC	2	60,68	**409**				
0,9	1,3	0,88	8,0	45	16	4	8,8 x DC	2	62,39	**509**				
0,9	1,3	0,88	10,0	45	16	4	11 x DC	2			62,39	**309**		
0,9	1,3	0,88	15,0	50	16	4	16,6 x DC	2			69,35	**409**		
1,0	1,5	0,95	4,0	45	16	4	4 x DC	2	62,39	**310**				

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

14

Continued on next page

BlueLine – Micro-end milling cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





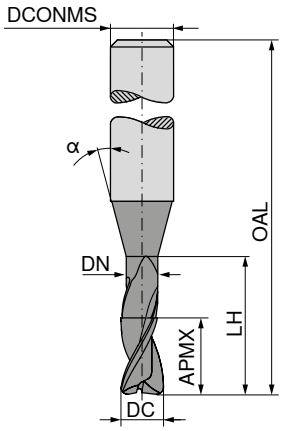

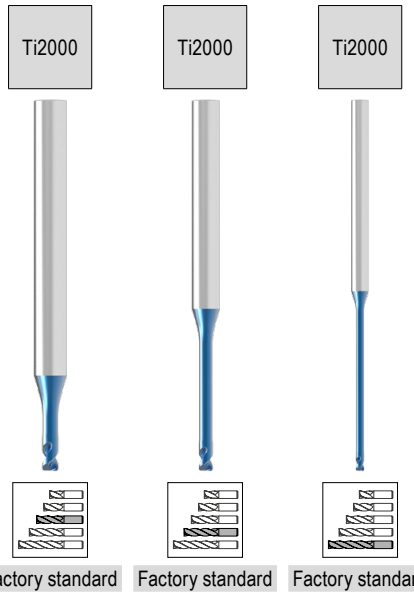

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 345 ... EUR V1		52 346 ... EUR V1		52 347 ... EUR V1	
1,0	1,5	0,95	6,0	45	16	4	6 x DC	2	62,39	**410**				
1,0	1,5	0,95	8,0	45	16	4	8 x DC	2	62,39	**510**				
1,0	1,5	0,95	10,0	45	16	4	10 x DC	2			62,39	**310**		
1,0	1,5	0,95	12,0	45	16	4	12 x DC	2			63,66	**410**		
1,0	1,5	0,95	14,0	45	16	4	14 x DC	2			63,66	**510**		
1,0	1,5	0,95	16,0	50	16	4	16 x DC	2			66,63	**610**		
1,0	1,5	0,95	20,0	54	16	4	20 x DC	2					73,89	**310**
1,0	1,5	0,95	25,0	70	16	4	25 x DC	2					80,13	**410**
1,0	1,5	0,95	30,0	70	16	4	30 x DC	2					81,28	**510**
1,2	1,8	1,14	6,0	45	16	4	5 x DC	2	67,50	**312**				
1,2	1,8	1,14	8,0	45	16	4	6,6 x DC	2	67,50	**412**				
1,2	1,8	1,14	10,0	45	16	4	8,3 x DC	2	69,35	**512**				
1,2	1,8	1,14	12,0	45	16	4	10 x DC	2			69,35	**312**		
1,2	1,8	1,14	16,0	50	16	4	13,3 x DC	2			76,31	**412**		
1,2	1,8	1,14	20,0	60	16	4	16,6 x DC	2			78,44	**512**		
1,4	2,1	1,34	6,0	45	16	4	4,2 x DC	2	67,50	**314**				
1,4	2,1	1,34	8,0	45	16	4	5,7 x DC	2	67,50	**414**				
1,4	2,1	1,34	10,0	45	16	4	7,1 x DC	2	69,35	**514**				
1,4	2,1	1,34	12,0	45	16	4	8,5 x DC	2	69,35	**614**				
1,4	2,1	1,34	14,0	45	16	4	10 x DC	2			69,35	**314**		
1,4	2,1	1,34	16,0	50	16	4	11,4 x DC	2			76,31	**414**		
1,4	2,1	1,34	22,0	54	16	4	15,7 x DC	2			78,44	**514**		
1,5	2,3	1,44	6,0	45	16	4	4 x DC	2	65,09	**315**				
1,5	2,3	1,44	8,0	45	16	4	5,3 x DC	2	65,09	**415**				
1,5	2,3	1,44	10,0	45	16	4	6,6 x DC	2	65,93	**515**				
1,5	2,3	1,44	12,0	45	16	4	8 x DC	2	65,93	**615**				
1,5	2,3	1,44	14,0	50	16	4	9,3 x DC	2	73,76	**715**				
1,5	2,3	1,44	16,0	50	16	4	10,6 x DC	2			73,76	**315**		
1,5	2,3	1,44	18,0	54	16	4	12 x DC	2			73,76	**415**		
1,5	2,3	1,44	20,0	54	16	4	13,3 x DC	2			73,76	**515**		
1,5	2,3	1,44	25,0	70	16	4	16,6 x DC	2			81,13	**615**		
1,5	2,3	1,44	30,0	70	16	4	20 x DC	2			81,13	**715**		
1,5	2,3	1,44	35,0	70	16	4	23,3 x DC	2					82,14	**315**
1,5	2,3	1,44	40,0	80	16	4	26,6 x DC	2					85,96	**415**
1,5	2,3	1,44	45,0	80	16	4	30 x DC	2					87,82	**515**
1,6	2,4	1,51	6,0	45	16	4	3,7 x DC	2	65,09	**316**				
1,6	2,4	1,51	8,0	45	16	4	5 x DC	2	65,09	**416**				
1,6	2,4	1,51	10,0	45	16	4	6,2 x DC	2	65,93	**516**				
1,6	2,4	1,51	12,0	45	16	4	7,5 x DC	2	65,93	**616**				
1,6	2,4	1,51	14,0	50	16	4	8,75 x DC	2	69,63	**716**				
1,6	2,4	1,51	16,0	50	16	4	10 x DC	2			69,63	**316**		
1,6	2,4	1,51	18,0	54	16	4	11,25 x DC	2			69,63	**416**		
1,6	2,4	1,51	20,0	54	16	4	12,5 x DC	2			69,63	**516**		
1,6	2,4	1,51	26,0	60	16	4	16,2 x DC	2			81,13	**616**		
1,8	2,7	1,71	6,0	45	16	4	3,3 x DC	2	65,09	**318**				

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

Continued on next page

BlueLine – Micro-end milling cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





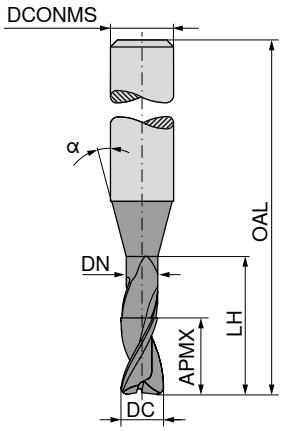

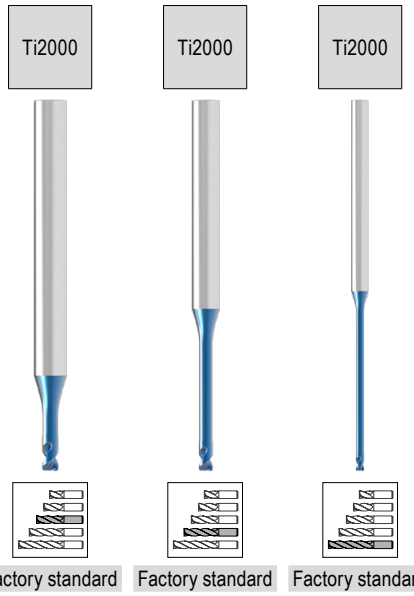

Factory standard | Factory standard | Factory standard

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 345 ... EUR V1		52 346 ... EUR V1		52 347 ... EUR V1	
1,8	2,7	1,71	8,0	45	16	4	4,4 x DC	2	65,09	**418**				
1,8	2,7	1,71	10,0	45	16	4	5,5 x DC	2	65,65	**518**				
1,8	2,7	1,71	12,0	45	16	4	6,6 x DC	2	65,93	**618**				
1,8	2,7	1,71	14,0	50	16	4	7,7 x DC	2	69,63	**718**				
1,8	2,7	1,71	16,0	50	16	4	8,8 x DC	2	69,63	**818**				
1,8	2,7	1,71	18,0	54	16	4	10 x DC	2			73,76	**318**		
1,8	2,7	1,71	20,0	54	16	4	11 x DC	2			73,76	**418**		
1,8	2,7	1,71	25,0	60	16	4	13,8 x DC	2			81,13	**518**		
2,0	3,0	1,91	6,0	45	16	4	3 x DC	2	65,09	**320**				
2,0	3,0	1,91	8,0	45	16	4	4 x DC	2	65,09	**420**				
2,0	3,0	1,91	10,0	45	16	4	5 x DC	2	65,93	**520**				
2,0	3,0	1,91	12,0	45	16	4	6 x DC	2	65,93	**620**				
2,0	3,0	1,91	14,0	50	16	4	7 x DC	2	69,63	**720**				
2,0	3,0	1,91	16,0	50	16	4	8 x DC	2	69,63	**820**				
2,0	3,0	1,91	18,0	54	16	4	9 x DC	2	69,63	**920**				
2,0	3,0	1,91	20,0	54	16	4	10 x DC	2			73,76	**320**		
2,0	3,0	1,91	25,0	60	16	4	12,5 x DC	2			81,13	**420**		
2,0	3,0	1,91	30,0	70	16	4	15 x DC	2			83,71	**520**		
2,0	3,0	1,91	35,0	80	16	4	17,5 x DC	2			86,54	**620**		
2,0	3,0	1,91	40,0	90	16	4	20 x DC	2					93,37	**320**
2,0	3,0	1,91	50,0	100	16	4	25 x DC	2					100,00	**420**
2,0	3,0	1,91	60,0	110	16	4	30 x DC	2					113,70	**520**
2,5	3,7	2,41	8,0	45	16	4	3,2 x DC	2	65,09	**325**				
2,5	3,7	2,41	10,0	45	16	4	4 x DC	2	65,93	**425**				
2,5	3,7	2,41	12,0	45	16	4	4,8 x DC	2	65,93	**525**				
2,5	3,7	2,41	14,0	50	16	4	5,6 x DC	2	69,63	**625**				
2,5	3,7	2,41	16,0	50	16	4	6,4 x DC	2	69,63	**725**				
2,5	3,7	2,41	18,0	54	16	4	7,2 x DC	2	73,76	**825**				
2,5	3,7	2,41	20,0	54	16	4	8 x DC	2	73,76	**925**				
2,5	3,7	2,41	25,0	60	16	4	10 x DC	2			80,57	**325**		
2,5	3,7	2,41	30,0	70	16	4	12 x DC	2			87,95	**425**		
2,5	3,7	2,41	40,0	90	16	4	16 x DC	2			114,00	**525**		
2,5	3,7	2,41	50,0	100	16	4	20 x DC	2					127,30	**325**
3,0	4,5	2,92	8,0	45	16	4	2,6 x DC	2	65,93	**330**				
3,0	4,5	2,92	12,0	45	16	4	4 x DC	2	65,93	**430**				
3,0	4,5	2,92	16,0	50	16	4	5,3 x DC	2	69,63	**530**				
3,0	4,5	2,92	20,0	54	16	4	6,6 x DC	2	73,76	**630**				

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

14

BlueLine – Micro-ball nosed cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

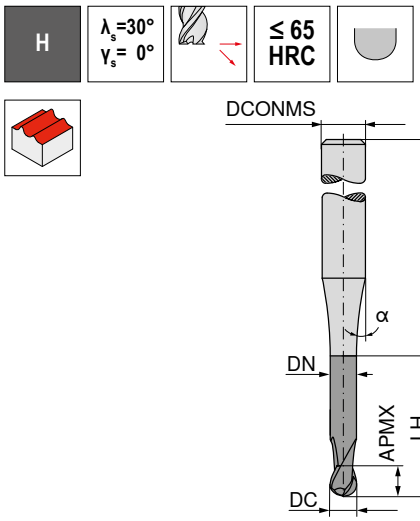

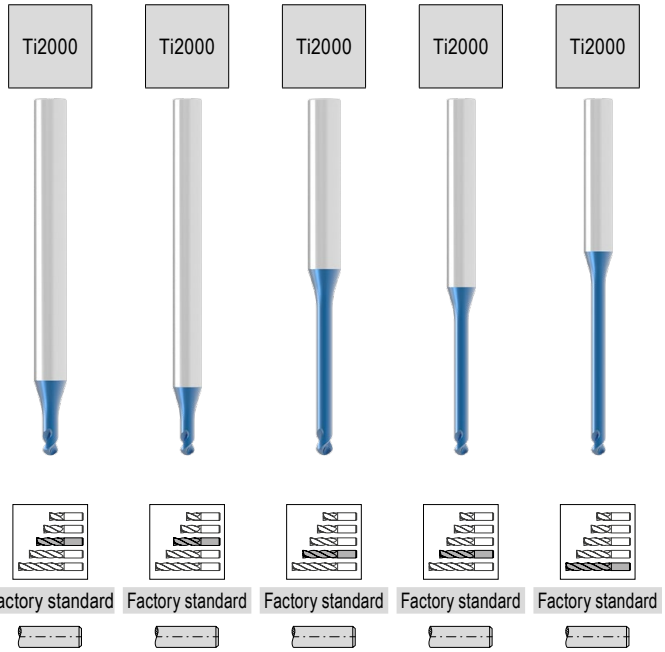

DC -0,01	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	52 356 ... EUR V1		52 358 ... EUR V1		52 357 ... EUR V1		52 359 ... EUR V1		52 360 ... EUR V1	
mm	mm	mm	mm	mm		mm												
0,2	0,16	0,17	0,30	45	16	4	1,5 x DC	2	86,23	**302**								
0,2	0,16	0,17	0,50	45	16	4	2,5 x DC	2	86,23	**402**								
0,2	0,16	0,17	0,75	45	16	4	3,75 x DC	2	86,23	**502**								
0,2	0,16	0,17	1,00	45	16	4	5 x DC	2	86,23	**602**								
0,2	0,16	0,17	1,25	45	16	4	6,2 x DC	2	86,23	**702**								
0,2	0,16	0,17	1,50	45	16	4	7,5 x DC	2	86,23	**802**								
0,2	0,16	0,17	1,75	45	16	4	8,7 x DC	2	86,23	**902**								
0,2	0,16	0,17	2,00	45	16	4	10 x DC	2					86,23	**302**				
0,2	0,16	0,17	2,50	45	16	4	12,5 x DC	2					86,23	**402**				
0,2	0,16	0,17	3,00	45	16	4	15 x DC	2					86,23	**502**				
0,3	0,24	0,27	0,50	45	16	4	1,6 x DC	2	83,71	**303**								
0,3	0,24	0,27	0,75	45	16	4	2,5 x DC	2	83,71	**403**								
0,3	0,24	0,27	1,00	45	16	4	3,3 x DC	2	83,71	**503**								
0,3	0,24	0,27	1,25	45	16	4	4,1 x DC	2	83,71	**603**								
0,3	0,24	0,27	1,50	45	16	4	5 x DC	2	83,71	**703**								
0,3	0,24	0,27	1,75	50	16	4	5,8 x DC	2			83,71	**303**						
0,3	0,24	0,27	2,00	50	16	4	6,6 x DC	2			83,71	**403**						
0,3	0,24	0,27	2,25	50	16	4	7,5 x DC	2			83,71	**503**						
0,3	0,24	0,27	2,50	50	16	4	8,3 x DC	2			83,71	**603**						
0,3	0,24	0,27	2,75	50	16	4	9,1 x DC	2			83,71	**703**						
0,3	0,24	0,27	3,00	50	16	4	10 x DC	2							83,71	**303**		
0,3	0,24	0,27	3,50	50	16	4	11,6 x DC	2							83,71	**403**		
0,3	0,24	0,27	4,00	50	16	4	13,3 x DC	2							83,71	**503**		
0,3	0,24	0,27	4,50	50	16	4	15 x DC	2							83,71	**603**		
0,4	0,32	0,34	0,50	45	16	4	1,2 x DC	2	82,54	**304**								
0,4	0,32	0,34	1,00	45	16	4	2,5 x DC	2	82,54	**404**								
0,4	0,32	0,34	1,50	45	16	4	3,75 x DC	2	82,54	**504**								
0,4	0,32	0,34	2,00	45	16	4	5 x DC	2	82,54	**604**								
0,4	0,32	0,34	2,50	45	16	4	6,2 x DC	2	82,54	**704**								
0,4	0,32	0,34	3,00	45	16	4	7,5 x DC	2	82,54	**804**								
0,4	0,32	0,34	3,50	45	16	4	8,7 x DC	2	82,01	**904**								
0,4	0,32	0,34	4,00	45	16	4	10 x DC	2					82,01	**304**				
0,4	0,32	0,34	4,50	45	16	4	11,2 x DC	2					82,01	**404**				
0,4	0,32	0,34	5,00	45	16	4	12,5 x DC	2					82,01	**504**				
0,4	0,32	0,34	5,50	45	16	4	13,7 x DC	2					82,01	**604**				
0,4	0,32	0,34	6,00	45	16	4	15 x DC	2					82,01	**704**				
0,5	0,40	0,47	1,50	45	16	4	3 x DC	2	67,06	**305**								
0,5	0,40	0,47	2,00	45	16	4	4 x DC	2	67,06	**405**								
0,5	0,40	0,47	2,50	45	16	4	5 x DC	2	67,06	**505**								
0,5	0,40	0,47	3,00	45	16	4	6 x DC	2	67,06	**605**								
0,5	0,40	0,47	3,50	45	16	4	7 x DC	2	67,06	**705**								

P	●	●	●	●	●
M					
K					
N					
S					
H	●	●	●	●	●
O					

→ v_c/f_z Page 422+423

Continued on next page

BlueLine – Micro-ball nosed cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

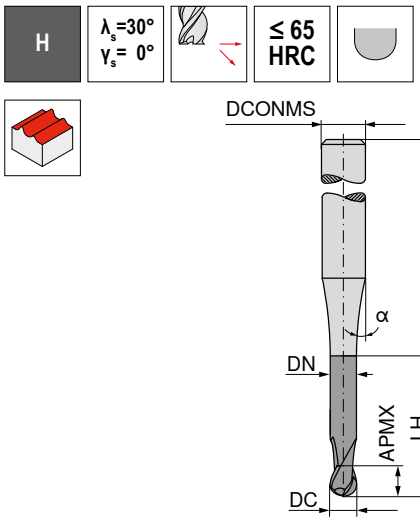

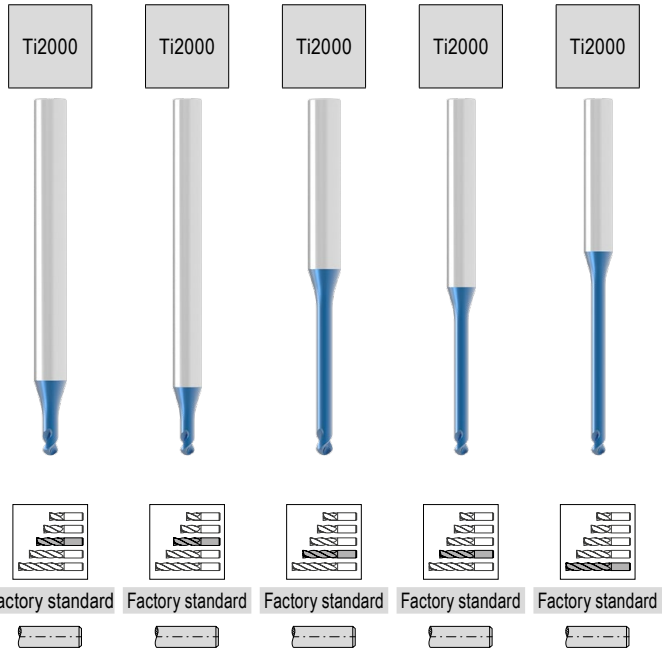

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_X	ZEFP	52 356 ... EUR V1		52 358 ... EUR V1		52 357 ... EUR V1		52 359 ... EUR V1		52 360 ... EUR V1	
0,5	0,40	0,47	4,00	45	16	4	8 x DC	2	67,06	**805**								
0,5	0,40	0,47	4,50	45	16	4	9 x DC	2	67,06	**905**								
0,5	0,40	0,47	5,00	45	16	4	10 x DC	2					67,06	**305**				
0,5	0,40	0,47	5,50	45	16	4	11 x DC	2					67,06	**405**				
0,5	0,40	0,47	6,00	45	16	4	12 x DC	2					67,06	**505**				
0,5	0,40	0,47	7,00	45	16	4	14 x DC	2					67,06	**605**				
0,5	0,40	0,47	8,00	45	16	4	16 x DC	2					67,94	**705**				
0,5	0,40	0,47	9,00	45	16	4	18 x DC	2					67,94	**805**				
0,5	0,40	0,47	10,00	50	16	4	20 x DC	2									67,94	**305**
0,6	0,40	0,57	12,00	50	16	4	20 x DC	2									71,34	**306**
0,6	0,48	0,57	1,00	45	16	4	1,6 x DC	2	67,06	**306**								
0,6	0,48	0,57	2,00	45	16	4	3,3 x DC	2	67,06	**406**								
0,6	0,48	0,57	3,00	45	16	4	5 x DC	2	67,06	**506**								
0,6	0,48	0,57	4,00	45	16	4	6,6 x DC	2	67,06	**606**								
0,6	0,48	0,57	5,00	45	16	4	8,3 x DC	2	67,06	**706**								
0,6	0,48	0,57	6,00	45	16	4	10 x DC	2					67,06	**306**				
0,6	0,48	0,57	8,00	45	16	4	13,3 x DC	2					67,06	**406**				
0,6	0,48	0,57	10,00	50	16	4	16,6 x DC	2							69,77	**306**		
0,8	0,64	0,77	2,00	45	16	4	2,5 x DC	2	75,59	**308**								
0,8	0,64	0,77	3,00	45	16	4	3,75 x DC	2	75,59	**408**								
0,8	0,64	0,77	4,00	45	16	4	5 x DC	2	75,59	**508**								
0,8	0,64	0,77	5,00	45	16	4	6,2 x DC	2	75,59	**608**								
0,8	0,64	0,77	6,00	45	16	4	7,5 x DC	2	75,59	**708**								
0,8	0,64	0,77	7,00	45	16	4	8,7 x DC	2	75,59	**808**								
0,8	0,64	0,77	8,00	45	16	4	10 x DC	2					76,31	**308**				
0,8	0,64	0,77	9,00	45	16	4	11,2 x DC	2					76,31	**408**				
0,8	0,64	0,77	10,00	50	16	4	12,5 x DC	2							76,31	**308**		
1,0	0,80	0,96	3,00	45	16	4	3 x DC	2	64,23	**310**								
1,0	0,80	0,96	4,00	45	16	4	4 x DC	2	64,23	**410**								
1,0	0,80	0,96	5,00	45	16	4	5 x DC	2	64,23	**510**								
1,0	0,80	0,96	6,00	45	16	4	6 x DC	2	64,23	**610**								
1,0	0,80	0,96	7,00	45	16	4	7 x DC	2	69,35	**710**								
1,0	0,80	0,96	8,00	45	16	4	8 x DC	2	69,35	**810**								
1,0	0,80	0,96	9,00	45	16	4	9 x DC	2	69,35	**910**								
1,0	0,80	0,96	10,00	45	16	4	10 x DC	2					69,35	**310**				
1,0	0,80	0,96	12,00	45	16	4	12 x DC	2					69,35	**410**				
1,0	0,80	0,96	14,00	50	16	4	14 x DC	2							71,34	**310**		
1,0	0,80	0,96	16,00	50	16	4	16 x DC	2							74,17	**410**		
1,2	0,96	1,16	6,00	45	16	4	5 x DC	2	71,63	**312**								
1,2	0,96	1,16	8,00	45	16	4	6,6 x DC	2	71,63	**412**								
1,2	0,96	1,16	10,00	45	16	4	8,3 x DC	2	74,04	**512**								

P	●	●	●	●	●
M					
K					
N					
S					
H	●	●	●	●	●
O					

14

→ v_c/f_z Page 422+423

Continued on next page

BlueLine – Micro-ball nosed cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth

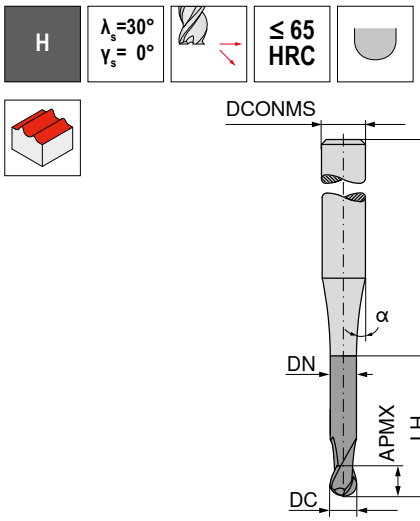

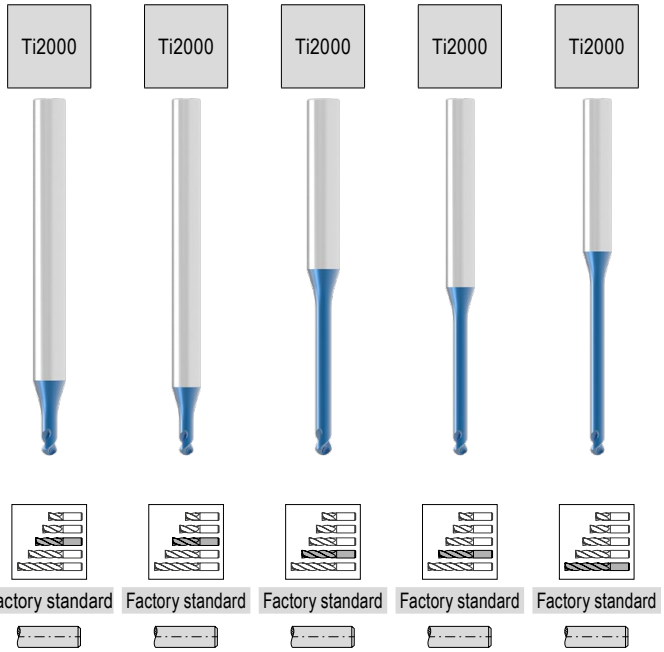

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	T_x	ZEFP	52 356 ... EUR V1		52 358 ... EUR V1		52 357 ... EUR V1		52 359 ... EUR V1		52 360 ... EUR V1	
1,2	0,96	1,16	12,00	45	16	4	10 x DC	2					74,04	**312**				
1,2	0,96	1,16	14,00	50	16	4	11,6 x DC	2							74,87	**312**		
1,2	0,96	1,16	16,00	50	16	4	13,3 x DC	2							74,87	**412**		
1,4	1,12	1,34	8,00	45	16	4	5,7 x DC	2	68,92	**314**								
1,4	1,12	1,34	12,00	45	16	4	8,5 x DC	2	71,63	**414**								
1,4	1,12	1,34	16,00	50	16	4	11,4 x DC	2							74,31	**314**		
1,5	1,20	1,44	3,00	45	16	4	2 x DC	2	67,35	**315**								
1,5	1,20	1,44	4,00	45	16	4	2,6 x DC	2	67,35	**415**								
1,5	1,20	1,44	6,00	45	16	4	4 x DC	2	67,35	**515**								
1,5	1,20	1,44	8,00	45	16	4	5,3 x DC	2	67,35	**615**								
1,5	1,20	1,44	10,00	45	16	4	6,6 x DC	2	67,35	**715**								
1,5	1,20	1,44	12,00	45	16	4	8 x DC	2	71,34	**815**								
1,5	1,20	1,44	14,00	50	16	4	9,3 x DC	2			71,34	**315**						
1,5	1,20	1,44	16,00	50	16	4	10,6 x DC	2							71,34	**315**		
1,6	1,28	1,54	8,00	45	16	4	5 x DC	2	71,34	**316**								
1,6	1,28	1,54	12,00	45	16	4	7,5 x DC	2	71,34	**416**								
1,6	1,28	1,54	16,00	50	16	4	10 x DC	2							74,04	**316**		
1,8	1,44	1,74	8,00	45	16	4	4,4 x DC	2	71,34	**318**								
1,8	1,44	1,74	12,00	45	16	4	6,6 x DC	2	71,34	**418**								
1,8	1,44	1,74	16,00	50	16	4	8,8 x DC	2			74,04	**318**						
2,0	1,60	1,94	3,00	45	16	4	1,5 x DC	2	66,93	**320**								
2,0	1,60	1,94	4,00	45	16	4	2 x DC	2	66,93	**420**								
2,0	1,60	1,94	6,00	45	16	4	3 x DC	2	66,93	**520**								
2,0	1,60	1,94	8,00	45	16	4	4 x DC	2	71,34	**620**								
2,0	1,60	1,94	10,00	45	16	4	5 x DC	2	71,34	**720**								
2,0	1,60	1,94	12,00	45	16	4	6 x DC	2	71,34	**820**								
2,0	1,60	1,94	14,00	50	16	4	7 x DC	2			71,34	**320**						
2,0	1,60	1,94	16,00	50	16	4	8 x DC	2			71,34	**420**						
2,5	2,00	2,41	10,00	45	16	4	4 x DC	2	74,31	**325**								
2,5	2,00	2,41	15,00	50	16	4	6 x DC	2			76,44	**325**						
3,0	3,50	2,92	8,00	45	16	4	2,6 x DC	2	71,63	**330**								
3,0	3,50	2,92	10,00	45	16	4	3,3 x DC	2	71,63	**430**								
3,0	3,50	2,92	12,00	45	16	4	4 x DC	2	71,63	**530**								
3,0	3,50	2,92	16,00	45	16	4	5,3 x DC	2	75,19	**630**								
3,0	3,50	2,92	16,00	50	16	4	5,3 x DC	2			75,59	**330**						
P									●		●		●		●		●	
M																		
K																		
N																		
S																		
H									●		●		●		●		●	
O																		

→ v_c/f_z Page 422+423

BlueLine – Micro-torus cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





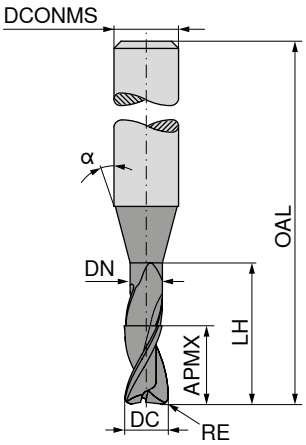

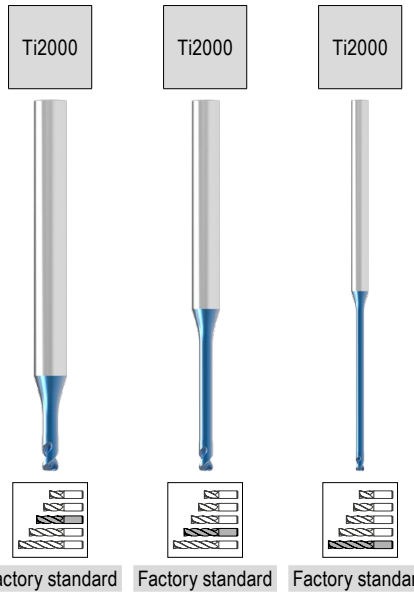

DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	52 349 ... EUR V1		52 350 ... EUR V1		52 351 ... EUR V1	
mm	mm	mm	mm	mm	mm		mm								
0,4	0,1	0,4	0,38	1,0	50	16	4	2,5 x DC	2	82,54	**30401**				
0,4	0,1	0,4	0,38	1,5	50	16	4	3,75 x DC	2	82,54	**40401**				
0,4	0,1	0,4	0,38	2,0	50	16	4	5 x DC	2	82,54	**50401**				
0,4	0,1	0,4	0,38	3,0	50	16	4	7,5 x DC	2	82,54	**60401**				
0,4	0,1	0,4	0,38	4,0	50	16	4	10 x DC	2			82,54	**30401**		
0,5	0,1	0,5	0,48	1,0	50	16	4	2 x DC	2	67,06	**30501**				
0,5	0,1	0,5	0,48	2,0	50	16	4	4 x DC	2	67,06	**40501**				
0,5	0,1	0,5	0,48	3,0	50	16	4	6 x DC	2	67,06	**50501**				
0,5	0,1	0,5	0,48	4,0	50	16	4	8 x DC	2	67,06	**60501**				
0,5	0,1	0,5	0,48	5,0	50	16	4	10 x DC	2			67,06	**30501**		
0,5	0,1	0,5	0,48	6,0	50	16	4	12 x DC	2			67,06	**40501**		
0,6	0,1	0,6	0,58	2,0	50	16	4	3,3 x DC	2	67,06	**30601**				
0,6	0,1	0,6	0,58	3,0	50	16	4	5 x DC	2	67,06	**40601**				
0,6	0,1	0,6	0,58	4,0	50	16	4	6,6 x DC	2	67,06	**50601**				
0,6	0,1	0,6	0,58	6,0	50	16	4	10 x DC	2			67,06	**30601**		
0,6	0,1	0,6	0,58	8,0	50	16	4	13,3 x DC	2			67,06	**40601**		
0,7	0,1	0,7	0,68	4,0	50	16	4	5,7 x DC	2	70,76	**30701**				
0,7	0,1	0,7	0,68	6,0	50	16	4	8,5 x DC	2	70,76	**40701**				
0,8	0,1	0,8	0,78	4,0	50	16	4	5 x DC	2	75,46	**30801**				
0,8	0,1	0,8	0,78	6,0	50	16	4	7,5 x DC	2	75,46	**40801**				
0,8	0,2	0,8	0,78	4,0	50	16	4	5 x DC	2	75,59	**30802**				
0,8	0,2	0,8	0,78	6,0	50	16	4	7,5 x DC	2	75,59	**40802**				
1,0	0,1	1,0	0,95	2,0	50	16	4	2 x DC	2	63,66	**31001**				
1,0	0,1	1,0	0,95	4,0	50	16	4	4 x DC	2	63,66	**41001**				
1,0	0,1	1,0	0,95	6,0	50	16	4	6 x DC	2	69,35	**51001**				
1,0	0,1	1,0	0,95	8,0	50	16	4	8 x DC	2	69,35	**61001**				
1,0	0,1	1,0	0,95	10,0	50	16	4	10 x DC	2			69,35	**31001**		
1,0	0,1	1,0	0,95	12,0	54	16	4	12 x DC	2			69,35	**41001**		
1,0	0,1	1,0	0,95	16,0	60	16	4	16 x DC	2			91,08	**51001**		
1,0	0,1	1,0	0,95	20,0	60	16	4	20 x DC	2					101,90	**31001**
1,0	0,2	1,0	0,95	2,0	50	16	4	2 x DC	2	64,23	**31002**				
1,0	0,2	1,0	0,95	4,0	50	16	4	4 x DC	2	64,23	**41002**				
1,0	0,2	1,0	0,95	6,0	50	16	4	6 x DC	2	69,35	**51002**				
1,0	0,2	1,0	0,95	8,0	50	16	4	8 x DC	2	69,35	**61002**				
1,0	0,2	1,0	0,95	10,0	50	16	4	10 x DC	2			69,35	**31002**		
1,0	0,2	1,0	0,95	12,0	54	16	4	12 x DC	2			69,35	**41002**		
1,0	0,2	1,0	0,95	16,0	60	16	4	16 x DC	2			91,08	**51002**		
1,0	0,2	1,0	0,95	20,0	60	16	4	20 x DC	2					101,90	**31002**
1,0	0,3	1,0	0,95	2,0	50	16	4	2 x DC	2	64,23	**31003**				
1,0	0,3	1,0	0,95	4,0	50	16	4	4 x DC	2	64,23	**41003**				
1,0	0,3	1,0	0,95	6,0	50	16	4	6 x DC	2	69,21	**51003**				
1,0	0,3	1,0	0,95	8,0	50	16	4	8 x DC	2	69,21	**61003**				
1,0	0,3	1,0	0,95	10,0	50	16	4	10 x DC	2			69,21	**31003**		
1,0	0,3	1,0	0,95	12,0	54	16	4	12 x DC	2			69,21	**41003**		
1,0	0,3	1,0	0,95	16,0	60	16	4	16 x DC	2			91,08	**51003**		

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

14

Continued on next page

BlueLine – Micro-torus cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





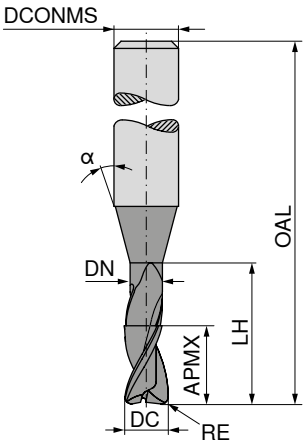

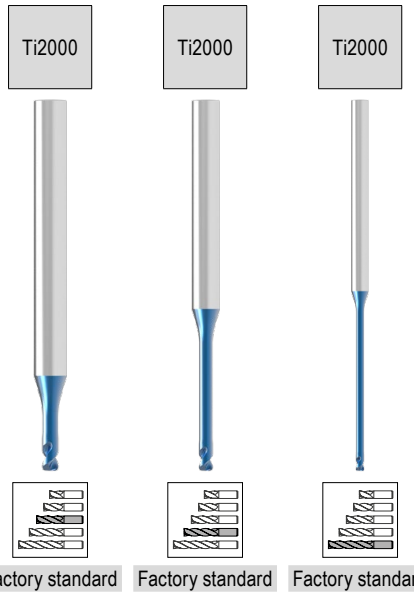

DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	52 349 ... EUR V1		52 350 ... EUR V1		52 351 ... EUR V1	
mm	mm	mm	mm	mm	mm		mm								
1,0	0,3	1,0	0,95	20,0	60	16	4	20 x DC	2					101,90	31003
1,2	0,2	1,2	1,14	6,0	50	16	4	5 x DC	2	71,63	31202				
1,2	0,2	1,2	1,14	12,0	54	16	4	10 x DC	2			71,63	31202		
1,2	0,2	1,2	1,14	20,0	60	16	4	16,6 x DC	2			107,30	41202		
1,2	0,3	1,2	1,14	6,0	50	16	4	5 x DC	2	71,63	31203				
1,2	0,3	1,2	1,14	12,0	54	16	4	10 x DC	2			71,63	31203		
1,2	0,3	1,2	1,14	20,0	60	16	4	16,6 x DC	2			107,30	41203		
1,5	0,2	1,5	1,44	4,0	50	16	4	2,6 x DC	2	67,35	31502				
1,5	0,2	1,5	1,44	6,0	50	16	4	4 x DC	2	67,35	41502				
1,5	0,2	1,5	1,44	8,0	50	16	4	5,3 x DC	2	71,34	51502				
1,5	0,2	1,5	1,44	10,0	50	16	4	6,6 x DC	2	71,34	61502				
1,5	0,2	1,5	1,44	12,0	54	16	4	8 x DC	2	71,34	71502				
1,5	0,2	1,5	1,44	16,0	54	16	4	10,6 x DC	2			71,34	31502		
1,5	0,2	1,5	1,44	20,0	60	16	4	13,3 x DC	2			71,34	41502		
1,5	0,3	1,5	1,44	4,0	50	16	4	2,6 x DC	2	67,35	31503				
1,5	0,3	1,5	1,44	6,0	50	16	4	4 x DC	2	67,35	41503				
1,5	0,3	1,5	1,44	8,0	50	16	4	5,3 x DC	2	71,34	51503				
1,5	0,3	1,5	1,44	10,0	50	16	4	6,6 x DC	2	71,34	61503				
1,5	0,3	1,5	1,44	12,0	54	16	4	8 x DC	2	71,34	71503				
1,5	0,3	1,5	1,44	16,0	54	16	4	10,6 x DC	2			71,34	31503		
1,5	0,3	1,5	1,44	20,0	60	16	4	13,3 x DC	2			71,34	41503		
1,5	0,5	1,5	1,44	4,0	50	16	4	2,6 x DC	2	67,35	31505				
1,5	0,5	1,5	1,44	6,0	50	16	4	4 x DC	2	67,35	41505				
1,5	0,5	1,5	1,44	8,0	50	16	4	5,3 x DC	2	67,35	51505				
1,5	0,5	1,5	1,44	10,0	50	16	4	6,6 x DC	2	67,35	61505				
1,5	0,5	1,5	1,44	12,0	54	16	4	8 x DC	2	67,35	71505				
1,5	0,5	1,5	1,44	16,0	54	16	4	10,6 x DC	2			67,35	31505		
1,5	0,5	1,5	1,44	20,0	60	16	4	13,3 x DC	2			67,35	41505		
2,0	0,1	2,0	1,91	4,0	50	16	4	2 x DC	2	66,93	32001				
2,0	0,1	2,0	1,91	6,0	50	16	4	3 x DC	2	66,93	42001				
2,0	0,1	2,0	1,91	8,0	50	16	4	4 x DC	2	71,34	52001				
2,0	0,1	2,0	1,91	10,0	50	16	4	5 x DC	2	71,34	62001				
2,0	0,1	2,0	1,91	12,0	54	16	4	6 x DC	2	71,34	72001				
2,0	0,1	2,0	1,91	16,0	54	16	4	8 x DC	2	71,34	82001				
2,0	0,1	2,0	1,91	20,0	60	16	4	10 x DC	2			71,34	32001		
2,0	0,1	2,0	1,91	26,0	70	16	4	13 x DC	2			71,34	42001		
2,0	0,2	2,0	1,91	4,0	50	16	4	2 x DC	2	66,93	32002				
2,0	0,2	2,0	1,91	6,0	50	16	4	3 x DC	2	66,93	42002				
2,0	0,2	2,0	1,91	8,0	50	16	4	4 x DC	2	71,34	52002				
2,0	0,2	2,0	1,91	10,0	50	16	4	5 x DC	2	71,34	62002				
2,0	0,2	2,0	1,91	12,0	54	16	4	6 x DC	2	71,34	72002				
2,0	0,2	2,0	1,91	16,0	54	16	4	8 x DC	2	71,34	82002				
2,0	0,2	2,0	1,91	20,0	60	16	4	10 x DC	2			71,34	32002		
2,0	0,2	2,0	1,91	26,0	70	16	4	13 x DC	2			71,34	42002		
2,0	0,3	2,0	1,91	4,0	50	16	4	2 x DC	2	66,93	32003				

P	●	●	●
M			
K			
N			
S			
H	●	●	●
O			

→ v_c/f_z Page 420+421

Continued on next page

BlueLine – Micro-torus cutter

The all-rounder for machining tempered steel

▲ T_x = maximum engagement depth





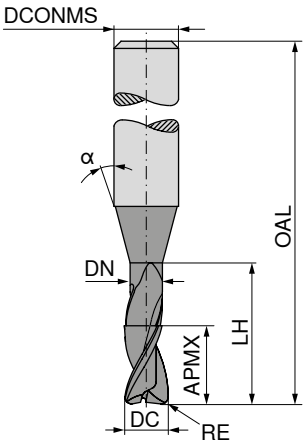

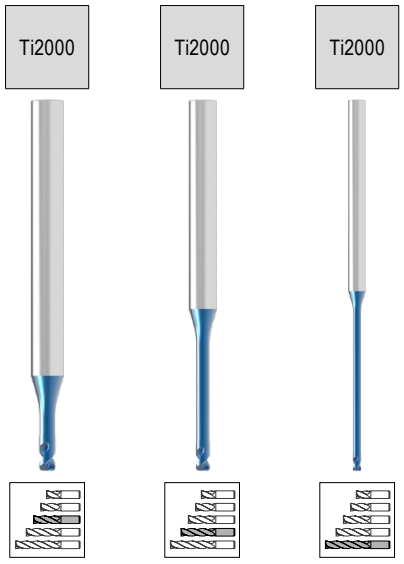

Factory standard | Factory standard | Factory standard



DC -0,012	RE ±0,005	APMX	DN	LH	OAL	α°	DCONMS h5	T_x	ZEFP	52 349 ... EUR V1		52 350 ... EUR V1		52 351 ... EUR V1	
mm	mm	mm	mm	mm	mm		mm								
2,0	0,3	2,0	1,91	6,0	50	16	4	3 x DC	2	66,93	**42003**				
2,0	0,3	2,0	1,91	8,0	50	16	4	4 x DC	2	66,93	**52003**				
2,0	0,3	2,0	1,91	10,0	50	16	4	5 x DC	2	71,34	**62003**				
2,0	0,3	2,0	1,91	12,0	54	16	4	6 x DC	2	71,34	**72003**				
2,0	0,3	2,0	1,91	16,0	54	16	4	8 x DC	2	71,34	**82003**				
2,0	0,3	2,0	1,91	20,0	60	16	4	10 x DC	2			71,34	**32003**		
2,0	0,3	2,0	1,91	26,0	70	16	4	13 x DC	2			71,34	**42003**		
2,0	0,5	2,0	1,91	4,0	50	16	4	2 x DC	2	66,93	**32005**				
2,0	0,5	2,0	1,91	6,0	50	16	4	3 x DC	2	66,93	**42005**				
2,0	0,5	2,0	1,91	8,0	50	16	4	4 x DC	2	71,34	**52005**				
2,0	0,5	2,0	1,91	10,0	50	16	4	5 x DC	2	71,34	**62005**				
2,0	0,5	2,0	1,91	12,0	54	16	4	6 x DC	2	71,34	**72005**				
2,0	0,5	2,0	1,91	16,0	54	16	4	8 x DC	2	71,34	**82005**				
2,0	0,5	2,0	1,91	20,0	60	16	4	10 x DC	2			71,34	**32005**		
2,0	0,5	2,0	1,91	26,0	70	16	4	13 x DC	2			71,34	**42005**		
2,5	0,3	2,5	2,41	10,0	50	16	4	4 x DC	2	74,31	**32503**				
2,5	0,3	2,5	2,41	12,0	60	16	4	4,8 x DC	2	76,44	**42503**				
2,5	0,3	2,5	2,41	30,0	70	16	4	12 x DC	2			78,86	**32503**		
2,5	0,5	2,5	2,41	10,0	50	16	4	4 x DC	2	74,31	**32505**				
2,5	0,5	2,5	2,41	12,0	60	16	4	4,8 x DC	2	74,31	**42505**				
2,5	0,5	2,5	2,41	30,0	70	16	4	12 x DC	2			78,86	**32505**		
3,0	0,3	3,0	2,92	10,0	50	16	4	3,3 x DC	2	70,47	**33003**				
3,0	0,3	3,0	2,92	12,0	50	16	4	4 x DC	2	71,47	**43003**				
3,0	0,3	3,0	2,92	30,0	70	16	4	10 x DC	2			95,78	**33003**		
3,0	0,5	3,0	2,92	10,0	50	16	4	3,3 x DC	2	70,47	**33005**				
3,0	0,5	3,0	2,92	12,0	50	16	4	4 x DC	2	71,34	**43005**				
3,0	0,5	3,0	2,92	30,0	70	16	4	10 x DC	2			95,78	**33005**		
P										●		●		●	
M															
K															
N															
S															
H										●		●		●	
O															

→ v_c/f_z Page 420+421

BlueLine – End milling cutter

The all-rounder for machining tempered steel





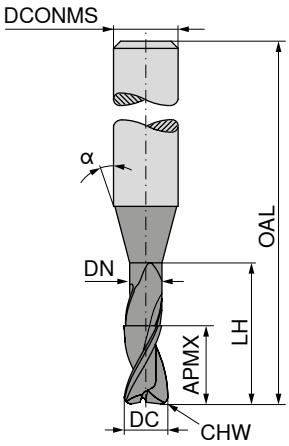

Factory standard

52 344 ...

DC e8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	CHW mm	ZEFP	EUR V1	
0,5	1,5			58	12	6	0,02	2	52,87	**905**
1,0	3,0			58	12	6	0,02	2	52,87	**010**
1,5	4,0			58	12	6	0,03	2	52,87	**015**
2,0	5,0	1,8	12	58	20	6	0,03	2	52,87	**020**
2,5	6,0	2,3	13	58	20	6	0,04	2	52,87	**025**
3,0	8,0	2,8	15	58	20	6	0,04	2	52,87	**030**
3,5	8,0	3,3	15	58	20	6	0,05	2	52,87	**035**
4,0	11,0	3,8	15	58	20	6	0,05	2	52,87	**040**
5,0	13,0	4,8	21	58	20	6	0,06	2	52,87	**050**
6,0	16,0	5,8	24	58		6	0,07	2	52,87	**060**
8,0	19,0	7,8	27	64		8	0,08	2	69,35	**080**
10,0	22,0	9,8	32	73		10	0,10	2	105,70	**100**
12,0	26,0	11,8	38	84		12	0,13	2	138,50	**120**
16,0	32,0	15,7	44	93		16	0,18	2	237,40	**160**
20,0	38,0	19,7	54	104		20	0,20	2	363,80	**200**

P	●
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 424+425

BlueLine – End milling cutter with corner radius

The all-rounder for machining tempered steel





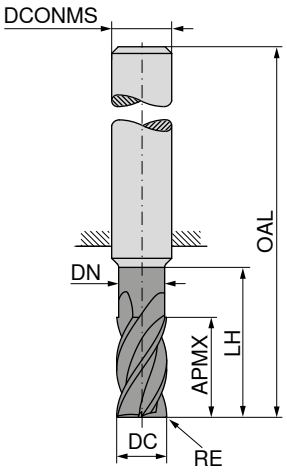

DC e8	RE ±0,005	APMX	DN	LH	OAL	DCONMS h5	ZEFP	52 353 ... EUR V1		52 354 ... EUR V1	
mm	mm	mm	mm	mm	mm	mm					
1	0,10	1,5	0,85	10	50	3	4	63,50	31001		
1	0,10	1,5	0,85	20	75	3	4			91,24	31001
1	0,20	1,5	0,85	10	50	3	4	63,94	31002		
1	0,20	1,5	0,85	20	75	3	4			91,24	31002
2	0,20	2,5	1,80	12	50	3	4	62,94	32002		
2	0,20	2,5	1,80	25	75	3	4			89,81	32002
2	0,30	2,5	1,80	12	50	3	4	62,94	32003		
2	0,30	2,5	1,80	25	75	3	4			89,81	32003
2	0,50	2,5	1,80	12	50	3	4	62,94	32005		
2	0,50	2,5	1,80	25	75	3	4			89,81	32005
3	0,25	4,0	2,70	14	50	3	4	59,82	33002		
3	0,25	4,0	2,70	32	75	3	4			85,13	33002
3	0,30	4,0	2,70	14	50	3	4	59,82	33003		
3	0,30	4,0	2,70	32	75	3	4			85,13	33003
3	0,50	4,0	2,70	14	50	3	4	59,82	33005		
3	0,50	4,0	2,70	32	75	3	4			85,13	33005
3	1,00	4,0	2,70	14	50	3	4	59,82	33010		
3	1,00	4,0	2,70	32	75	3	4			85,13	33010
4	0,20	5,0	3,70	16	50	4	4	64,23	44002		
4	0,20	5,0	3,70	36	75	4	4			92,23	44002
4	0,25	5,0	3,70	16	50	4	4	64,23	44003		
4	0,25	5,0	3,70	36	75	4	4			92,23	44003
4	0,40	5,0	3,70	16	50	4	4	64,23	44004		
4	0,40	5,0	3,70	36	75	4	4			92,23	44004
4	0,50	5,0	3,70	16	50	4	4	64,23	44005		
4	0,50	5,0	3,70	36	75	4	4			92,23	44005
4	1,00	5,0	3,70	16	50	4	4	64,23	44010		
4	1,00	5,0	3,70	36	75	4	4			92,23	44010
5	0,25	6,0	4,60	18	54	5	4	69,63	55002		
5	0,25	6,0	4,60	40	75	5	4			102,90	55002
5	0,50	6,0	4,60	18	54	5	4	69,63	55005		
5	0,50	6,0	4,60	40	75	5	4			102,90	55005
5	1,00	6,0	4,60	18	54	5	4	69,63	55010		
5	1,00	6,0	4,60	40	75	5	4			102,90	55010
6	0,25	7,0	5,50	21	58	6	4	78,86	06002		
6	0,25	7,0	5,50	44	80	6	4			111,40	06002
6	0,50	7,0	5,50	21	58	6	4	78,86	06005		
6	0,50	7,0	5,50	44	80	6	4			111,40	06005
6	0,80	7,0	5,50	21	58	6	4	78,86	06008		
6	1,00	7,0	5,50	21	58	6	4	78,86	06010		
6	1,00	7,0	5,50	44	80	6	4			111,40	06010
6	1,50	7,0	5,50	21	58	6	4	78,86	06015		
6	1,50	7,0	5,50	44	80	6	4			111,40	06015
6	2,00	7,0	5,50	21	58	6	4	78,86	06020		
8	0,25	9,0	7,40	27	64	8	4	103,90	08002		

P	●	●
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 426+427

14

Continued on next page

BlueLine – End milling cutter with corner radius

The all-rounder for machining tempered steel





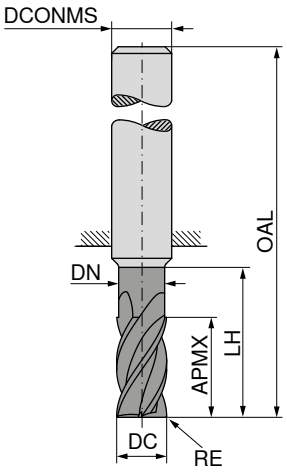

DC e8	RE ±0,005	APMX	DN	LH	OAL	DCONMS h5	ZEFP	52 353 ... EUR V1		52 354 ... EUR V1	
mm	mm	mm	mm	mm	mm	mm					
8	0,25	9,0	7,40	54	100	8	4			152,00	08002
8	0,50	9,0	7,40	27	64	8	4	103,90	08005		
8	0,50	9,0	7,40	54	100	8	4			152,00	08005
8	0,80	9,0	7,40	27	64	8	4	103,90	08008		
8	0,80	9,0	7,40	54	100	8	4			152,00	08008
8	1,00	9,0	7,40	27	64	8	4	103,90	08010		
8	1,00	9,0	7,40	54	100	8	4			152,00	08010
8	1,50	9,0	7,40	27	64	8	4	103,90	08015		
8	1,50	9,0	7,40	54	100	8	4			152,00	08015
8	2,00	9,0	7,40	27	64	8	4	103,90	08020		
8	2,00	9,0	7,40	54	100	8	4			152,00	08020
8	2,50	9,0	7,40	27	64	8	4	103,90	08025		
8	3,00	9,0	7,40	27	64	8	4	103,90	08030		
8	3,00	9,0	7,40	54	100	8	4			152,00	08030
10	0,25	11,0	9,20	32	73	10	4	135,60	10002		
10	0,25	11,0	9,20	60	100	10	4			207,60	10002
10	0,50	11,0	9,20	32	73	10	4	135,60	10005		
10	0,50	11,0	9,20	60	100	10	4			207,60	10005
10	0,80	11,0	9,20	32	73	10	4	135,60	10008		
10	0,80	11,0	9,20	60	100	10	4			207,60	10008
10	1,00	11,0	9,20	32	73	10	4	135,60	10010		
10	1,00	11,0	9,20	60	100	10	4			207,60	10010
10	1,50	11,0	9,20	32	73	10	4	135,60	10015		
10	1,50	11,0	9,20	60	100	10	4			207,60	10015
10	2,00	11,0	9,20	32	73	10	4	135,60	10020		
10	2,00	11,0	9,20	60	100	10	4			207,60	10020
10	3,00	11,0	9,20	32	73	10	4	135,60	10030		
10	3,00	11,0	9,20	60	100	10	4			207,60	10030
10	3,50	11,0	9,20	32	73	10	4	135,60	10035		
12	0,50	12,0	11,00	38	84	12	4	183,50	12005		
12	0,50	12,0	11,00	75	120	12	4			274,30	12005
12	1,00	12,0	11,00	38	84	12	4	183,50	12010		
12	1,00	12,0	11,00	75	120	12	4			274,30	12010
12	1,50	12,0	11,00	38	84	12	4	183,50	12015		
12	1,50	12,0	11,00	75	120	12	4			274,30	12015
12	2,00	12,0	11,00	38	84	12	4	183,50	12020		
12	2,00	12,0	11,00	75	120	12	4			274,30	12020
12	3,00	12,0	11,00	38	84	12	4	183,50	12030		
12	3,00	12,0	11,00	75	120	12	4			274,30	12030
16	2,00	16,0	15,00	44	93	16	4	309,70	16020		
16	2,00	16,0	15,00	92	150	16	4			464,60	16020
16	3,00	16,0	15,00	44	93	16	4	309,70	16030		
16	3,00	16,0	15,00	92	150	16	4			464,60	16030

P	●	●
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 426+427

BlueLine – End milling cutter with corner radius

The all-rounder for machining tempered steel

▲ With decreasing helix angle for reduced machining noise & vibration

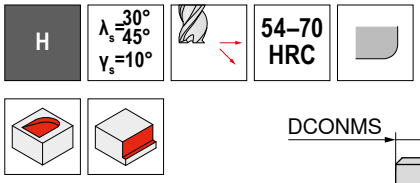

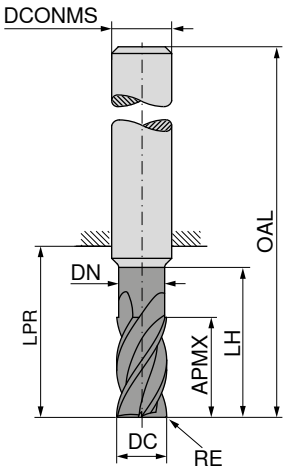

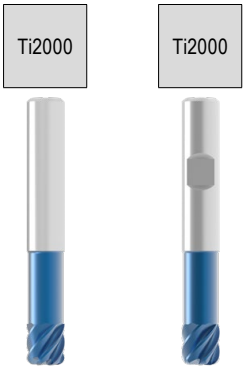

Factory standard | Factory standard

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 140 ... EUR V1		52 141 ... EUR V1	
3	0,3	4	2,7	14	22	50	3	4	75,19	031		
3	0,5	4	2,7	14	22	50	3	4	75,19	033		
3	1,0	4	2,7	14	22	50	3	4	75,19	034		
4	0,4	5	3,7	16	22	50	4	4	81,13	042		
4	0,5	5	3,7	16	22	50	4	4	81,13	043		
4	1,0	5	3,7	16	22	50	4	4	81,13	044		
5	0,5	6	4,6	18	26	54	5	4	85,13	053		
5	1,0	6	4,6	18	26	54	5	4	85,13	054		
6	0,5	7	5,5	21	21	57	6	6	106,20	063	106,20	063
6	1,0	7	5,5	21	21	57	6	6	106,20	064	106,20	064
6	1,5	7	5,5	21	21	57	6	6	106,20	065	106,20	065
8	0,5	9	7,4	27	27	63	8	6	140,10	083	140,10	083
8	1,0	9	7,4	27	27	63	8	6	140,10	084	140,10	084
8	1,5	9	7,4	27	27	63	8	6	140,10	085	140,10	085
8	2,0	9	7,4	27	27	63	8	6	140,10	086	140,10	086
10	0,5	11	9,2	32	32	72	10	6	180,50	103	180,50	103
10	1,0	11	9,2	32	32	72	10	6	180,50	104	180,50	104
10	1,5	11	9,2	32	32	72	10	6	180,50	105	180,50	105
10	2,0	11	9,2	32	32	72	10	6	180,50	106	180,50	106
12	0,5	12	11,0	38	38	83	12	6	244,50	123	244,50	123
12	1,0	12	11,0	38	38	83	12	6	244,50	124	244,50	124
12	1,5	12	11,0	38	38	83	12	6	244,50	125	244,50	125
12	2,0	12	11,0	38	38	83	12	6	244,50	126	244,50	126
16	1,0	16	15,0	44	45	93	16	6	415,00	161	415,00	161
16	2,0	16	15,0	44	45	93	16	6	415,00	163	415,00	163
20	1,0	20	18,5	50	54	104	20	6	584,10	201	584,10	201
20	2,5	20	18,5	50	54	104	20	6	584,10	204	584,10	204
P										○		○
M												
K												
N												
S												
H										●		●
O												

→ v_c/f_z Page 424+425

BlueLine – Finish milling cutter

The all-rounder for machining tempered steel

▲ With decreasing helix angle for reduced machining noise & vibration

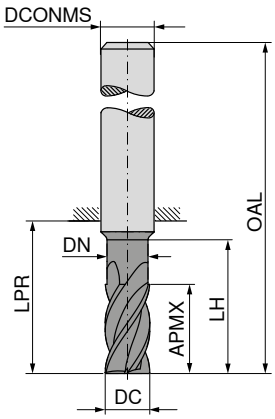



Factory standard | Factory standard | Factory standard | Factory standard | Factory standard

DC e8	APMX	LPR	DN	LH	OAL	DCONMS h6	ZEFP	52 133 ...		52 134 ...		52 135 ...		52 136 ...		52 348 ...	
mm	mm	mm	mm	mm	mm	mm		EUR V1		EUR V1		EUR V1		EUR V1		EUR V1	
2	8	22			58	6	4			57,27	020						
2	8	22	2,0	10	58	6	4	57,27	020								
3	12	22			58	6	4			57,27	030						
3	12	22	3,0	14	58	6	4	57,27	030								
4	13	22			58	6	4			67,50	040						
4	13	22	4,0	15	58	6	4	67,50	040								
5	15	22			58	6	6			69,92	050						
5	15	22	5,0	17	58	6	6	69,92	050								
6	16	22			58	6	6	77,30	060	77,30	060						
6	16	44	5,8	40	80	6	6									81,00	060
6	21	29			65	6	6					95,90	060	95,90	060		
8	19	64	7,7	50	100	8	6									100,90	080
8	22	34			70	8	6	92,93	080	92,93	080						
8	28	39			75	8	6					113,30	080	113,30	080		
10	25	33			73	10	6	149,30	100	149,30	100						
10	25	60	9,7	60	100	10	6									149,30	100
10	35	45			85	10	6					169,30	100	169,30	100		
12	28	39			84	12	6	214,60	120	214,60	120						
12	30	75	11,6	60	120	12	6									196,10	120
12	45	55			100	12	6					258,60	120	258,60	120		
14	30	39			84	14	6	225,90	140	225,90	140						
14	45	55			100	14	6					299,70	140	299,70	140		
16	35	45			93	16	8	331,00	160	331,00	160						
16	40	102	15,6	100	150	16	8									405,00	160
16	50	62			110	16	8					422,00	160	422,00	160		
16	65	77			125	16	8					454,70	161	454,70	161		
18	35	45			93	18	10	349,60	180	349,60	180						
18	54	66			114	18	10					469,00	180	469,00	180		
20	40	54			104	20	10	473,20	200	473,20	200						
20	50	100	19,6	100	150	20	10									543,00	200
20	55	76			126	20	10					596,90	200	596,90	200		
20	70	85			135	20	10					729,10	201	729,10	201		

P	○	○	○	○	●
M					
K					
N					
S					
H	●	●	●	●	●
O					

→ v_c/f_z Page 424–426

BlueLine – Finish milling cutter with corner radius

The all-rounder for machining tempered steel

H | λ_s=30° 45° | γ_s= 0° | 54–70 HRC

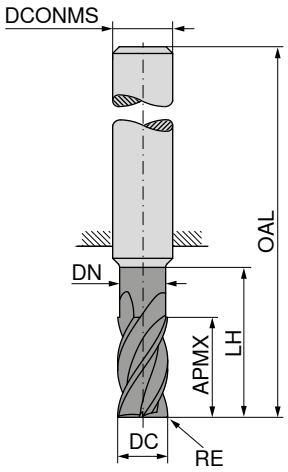

Factory standard

Factory standard

DC e8 mm	RE +/-0,005 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	52 324 ... EUR V1		52 325 ... EUR V1	
5	0,5	15	4,8	19	58	6	6	77,16	052		
5	1,0	15	4,8	19	58	6	6	77,16	053		
6	0,5	16	5,8	20	58	6	6	77,73	062		
6	0,5	21	5,8	29	65	6	6			111,70	062
6	1,0	16	5,8	20	58	6	6	90,38	063		
6	1,0	21	5,8	29	65	6	6			111,70	063
8	0,5	22	7,8	26	70	8	6	91,08	082		
8	0,5	28	7,8	39	75	8	6			127,30	082
8	1,0	22	7,8	26	70	8	6	100,60	083		
8	1,0	28	7,8	39	75	8	6			127,30	083
10	0,5	25	9,8	31	73	10	6	146,50	102		
10	0,5	35	9,8	45	85	10	6			197,60	102
10	1,0	25	9,8	31	73	10	6	146,50	103		
10	1,0	35	9,8	45	85	10	6			160,60	103
10	1,5	25	9,8	31	73	10	6	169,30	104		
10	1,5	35	9,8	45	85	10	6			197,60	104
12	0,5	28	11,8	37	84	12	6	197,60	122		
12	0,5	45	11,8	55	100	12	6			287,00	122
12	1,0	28	11,8	37	84	12	6	197,60	123		
12	1,0	45	11,8	55	100	12	6			236,00	123
12	1,5	28	11,8	37	84	12	6	228,90	124		
12	1,5	45	11,8	55	100	12	6			287,00	124
14	1,0	30	13,8	37	84	14	6	244,50	143		
14	1,0	45	13,8	55	100	14	6			322,60	143
16	1,0	35	15,8	43	93	16	8	375,30	163		
16	1,0	50	15,8	62	110	16	8			471,80	163
16	2,0	35	15,8	43	93	16	8	375,30	165		
16	2,0	50	15,8	62	110	16	8			471,80	165
18	1,0	35	17,8	43	93	18	10	402,10	183		
18	1,0	54	17,8	66	114	18	10			518,70	183
20	1,0	40	19,8	52	104	20	10	534,10	203		
20	1,0	55	19,8	76	126	20	10			692,30	203
20	2,0	40	19,8	52	104	20	10	534,10	205		
20	2,0	55	19,8	76	126	20	10			692,30	205

P	○	○
M		
K		
N		
S		
H	●	●
O		

→ v_c/f_z Page 424+425

14

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | 54–70 HRC | Ti2000

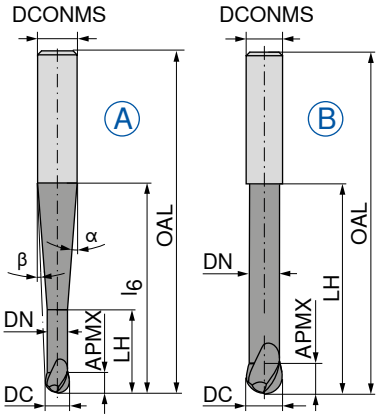

Factory standard

52 302 ...

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	EUR V1	
1,0	1,00	0,95	10	16,5	57	15	9	6	2	A	164,80	**010**
1,5	1,25	1,40	12	18,0	57	15	7,5	6	2	A	149,30	**015**
2,0	1,50	1,90	16	20,0	57	15	6	6	2	A	118,80	**020**
3,0	2,00	2,90	20	34,5	80	15	2,5	6	2	A	143,50	**030**
4,0	2,50	3,90	22	35,0	80	15	2	6	2	A	134,60	**040**
5,0	3,00	4,90	25	35,0	80	15	1	6	2	A	132,00	**050**
6,0	3,50	5,90	29		80			6	2	B	125,60	**060**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 428+429

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0.005 mm for Ø ≤ 6.0 mm / ± 0.01 mm for Ø > 6,0 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

H | λ_s=30° γ_s= 0° | 54–70 HRC | Ti2000

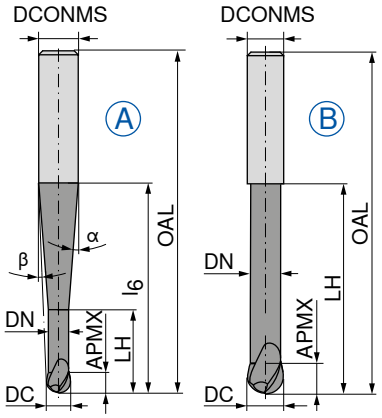

Factory standard

52 303 ...

DC mm	DC Tol.	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	EUR V1	
0,5	±0,01	1,0	0,45	2,0	20	57	10	8,5	6	2	A	178,90	**005**
1,0	±0,01	2,0	0,95	4,0	20	57	10	8	6	2	A	167,60	**010**
1,5	±0,01	2,5	1,40	7,5	20	57	12,5	7	6	2	A	159,30	**015**
2,0	±0,01	3,0	1,80	8,0	20	57	12	6,5	6	2	A	135,10	**020**
3,0	±0,01	3,5	2,80	10,0	20	57	11,5	5	6	2	A	128,60	**030**
4,0	±0,01	4,0	3,80	12,0	20	57	11	3,5	6	2	A	126,40	**040**
5,0	±0,01	5,0	4,70	14,0	20	57	10	2	6	2	A	126,60	**050**
6,0	±0,01	6,0	5,60	20,0		57			6	2	B	115,80	**060**
8,0	±0,02	7,0	7,60	25,0		63			8	2	B	157,70	**080**
10,0	±0,02	8,0	9,60	30,0		72			10	2	B	214,60	**100**
12,0	±0,02	10,0	11,50	35,0		83			12	2	B	277,30	**120**
12,0	±0,02	10,0	11,50	35,0	40	92	35	3,5	16	2	A	386,60	**121**
16,0	±0,02	12,0	15,50	40,0		92			16	2	B	375,30	**160**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 428+429

14

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

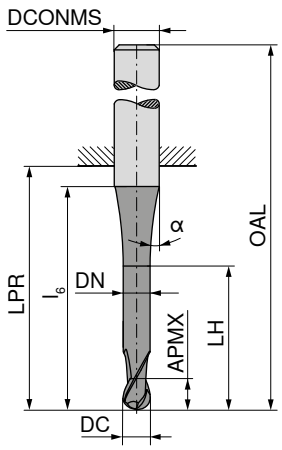







Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	l6 mm	LPR mm	OAL mm	DCONMS h6 mm	α° ±0,5	ZEFP	52 256 ... EUR V1		52 257 ... EUR V1		52 258 ... EUR V1		52 259 ... EUR V1	
0,10	0,2			11	10	38	3	8	2	127,10	**910**						
0,15	0,3			12	10	38	3	7,5	2	117,10	**915**						
0,20	0,4			12	10	38	3	7	2	109,90	**920**						
0,25	0,5	0,20	0,8	12	10	38	3	7	2	117,20	**925**						
0,30	1,0	0,25	1,3	12	10	38	3	7	2	109,90	**930**						
0,35	1,0	0,30	1,3	12	10	38	3	7	2	98,20	**935**						
0,40	1,0	0,35	1,3	12	10	38	3	7	2	73,60	**940**						
0,50	1,5	0,40	2,0	12	10	38	3	7,5	2	60,97	**950**						
0,50	1,5	0,40	2,0	17	18	54	6	10,5	2	64,64	**005**	64,64	**005**				
0,50	1,5	0,40	2,0	13	47	75	3	7	2					82,84	**950**		
0,50	1,5	0,40	2,0	17	44	80	6	10,5	2					94,92	**005**	94,92	**005**
0,60	1,5	0,50	2,0	12	10	38	3	7	2	65,80	**960**						
0,70	2,0	0,60	2,5	12	10	38	3	7,5	2	60,97	**970**						
0,80	2,0	0,70	2,5	13	10	38	3	7,5	2	60,97	**980**						
0,90	2,5	0,80	3,5	13	10	38	3	7	2	60,97	**990**						
1,00	2,0	0,90	3,0	13	22	50	3	6	2	65,22	**011**						
1,00	2,0	0,90	3,0	18	18	54	6	9,5	2	71,34	**106**	71,34	**010**				
1,00	3,0	0,90	4,0	14	47	75	3	6	2					82,84	**011**		
1,00	3,0	0,90	4,0	19	44	80	6	9,5	2					91,36	**010**	91,36	**010**
1,10	3,0	1,00	4,0	13	22	50	3	7	2	60,97	**911**						
1,20	3,0	1,10	4,0	13	22	50	3	7	2	60,97	**012**						
1,40	3,0	1,30	4,0	14	22	50	3	5	2	60,97	**014**						
1,50	3,0	1,40	4,0	13	22	50	3	5,5	2	65,22	**016**						
1,50	3,0	1,40	4,0	18	18	54	6	9	2	71,34	**156**	71,34	**015**				
1,50	4,0	1,40	6,0	13	47	75	3	7	2					81,83	**016**		
1,50	4,0	1,40	6,0	19	44	80	6	10	2					90,52	**015**	90,52	**015**
1,60	4,0	1,50	5,0	13	22	50	3	5	2	60,97	**916**						
1,80	4,0	1,70	5,0	13	22	50	3	5	2	60,97	**018**						
2,00	4,0	1,90	5,5	12	22	50	3	5	2	65,22	**021**						
2,00	4,0	1,90	5,5	18	18	54	6	9	2	71,34	**206**	71,34	**020**				
2,00	6,0	1,90	8,0	12	47	75	3	8	2					77,45	**021**		
2,00	6,0	1,90	8,0	20	44	80	6	11	2					85,13	**020**	85,13	**020**
2,50	5,0	2,30	6,5	10	22	50	3	7	2	60,97	**025**						
2,50	5,0	2,30	6,5	17	18	54	6	10	2	71,34	**026**	71,34	**026**				
2,50	8,0	2,30	10,0	14	47	75	3	5,5	2					76,03	**026**		
2,50	8,0	2,30	10,0	20	44	80	6	10	2					83,99	**025**	83,99	**025**
3,00	6,0	2,80	8,0		22	50	3		2	65,22	**031**						
3,00	6,0	2,80	8,0	18	18	54	6	9	2	71,34	**306**	71,34	**030**				

P	○	○	○	○
M				
K				
N				
S				
H	●	●	●	●
O				

→ v_c/f_z Page 428+429

Continued on next page

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | 54–70 HRC

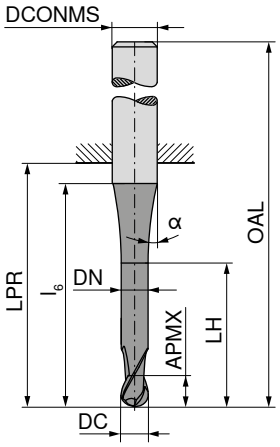

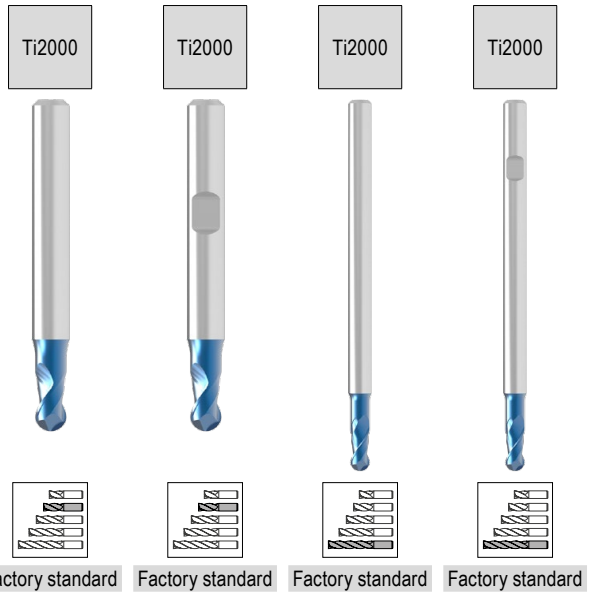

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	DCONMS h6 mm	α° ±0,5	ZEFP	52 256 ... EUR V1		52 257 ... EUR V1		52 258 ... EUR V1		52 259 ... EUR V1	
3,00	10,0	2,80	13,0		47	75	3		2					74,87	**031**		
3,00	10,0	2,80	15,0	23	44	80	6	11	2					83,00	**030**	83,00	**030**
4,00	7,0	3,80	10,0	18	18	54	6	11	2	71,34	**406**	71,34	**040**				
4,00	7,0	3,80	10,0		26	54	4		2	68,65	**041**						
4,00	13,0	3,80	20,0		47	75	4		2					72,19	**041**		
4,00	13,0	3,80	18,0	23	44	80	6	12,5	2					84,11	**040**	84,11	**040**
5,00	8,0	4,80	11,0	15	18	54	6	8	2	71,34	**506**	71,34	**050**				
5,00	8,0	4,80	11,0		26	54	5		2	71,34	**051**						
5,00	14,0	4,80	19,0		47	75	5		2					81,28	**051**		
5,00	14,0	4,80	19,0	21	64	100	6	13	2					89,81	**050**	89,81	**050**
6,00	10,0	5,80	15,0		18	54	6		2	71,34	**061**	71,34	**060**				
6,00	16,0	5,80	25,0		64	100	6		2					105,50	**060**	105,50	**060**
8,00	12,0	7,80	17,0		23	59	8		2	86,68	**081**	86,68	**080**				
8,00	22,0	7,80	35,0		64	100	8		2					126,50	**080**	126,50	**080**
10,00	13,0	9,80	18,0		27	67	10		2	112,90	**101**	112,90	**100**				
10,00	25,0	9,80	40,0		60	100	10		2					166,40	**100**	166,40	**100**
12,00	16,0	11,90	21,0		28	73	12		2	160,60	**121**	160,60	**120**				
12,00	26,0	11,80	40,0		55	100	12		2					217,30	**120**	217,30	**120**
14,00	16,0	13,80	21,0		30	75	14		2	203,20	**141**	203,20	**140**				
14,00	26,0	13,80	40,0		55	100	14		2					297,00	**140**	297,00	**140**
16,00	20,0	15,80	25,0		35	83	16		2	233,10	**161**	233,10	**160**				
16,00	30,0	15,80	50,0		102	150	16		2					478,90	**160**	478,90	**160**
20,00	25,0	19,80	30,0		43	93	20		2	380,90	**201**	380,90	**200**				
20,00	40,0	19,80	60,0		100	150	20		2					584,10	**200**	584,10	**200**

P	○	○	○	○
M				
K				
N				
S				
H	●	●	●	●
O				

→ v_c/f_z Page 428+429

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | ≤ 65 HRC | Ti2000

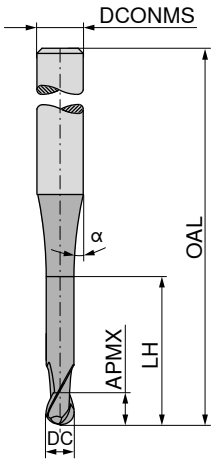

Factory standard

52 355 ...

DC f8 mm	APMX mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	EUR V1	
3	8	11	65	12	6	3	79,01	**030**
4	8	11	75	12	6	3	81,28	**040**
5	10	13	75	12	6	3	81,28	**050**
6	12		100		6	3	83,99	**060**
8	14		100		8	3	114,40	**080**
10	18		100		10	3	144,90	**100**
12	22		120		12	3	188,80	**120**

P	●
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 428

BlueLine – Ball Nosed Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm

H | λ_s=30° γ_s= 0° | 54–70 HRC

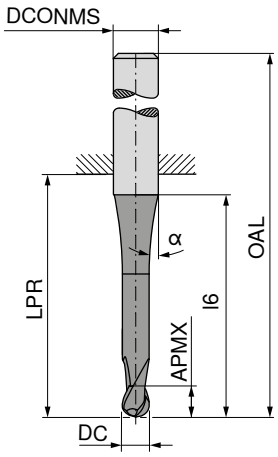







Factory standard

Factory standard

Factory standard

DC f8 mm	APMX mm	l_6 mm	LPR mm	OAL mm	α° ±1	DCONMS h6 mm	ZEFP	52 404 ... EUR V1		52 405 ... EUR V1		52 404 ... EUR V1	
2,0	4	10,0	22	50	8	3	4	61,67	**020**				
2,0	4	16,0	18	54	12	6	4	73,18	**021**	73,18	**021**		
2,0	4	10,0	47	75	8	3	4					81,13	**022**
2,0	4	16,0	44	80	12	6	4					106,20	**023**
2,5	5	16,0	18	54	12	6	4	73,18	**025**	73,18	**025**		
2,5	5	16,0	44	80	12	6	4					99,91	**026**
3,0	5		22	50		3	4	65,80	**030**				
3,0	5	14,0	18	54	12	6	4	71,63	**031**	71,63	**031**		
3,0	5		47	75		3	4					82,72	**032**
3,0	5	14,0	44	80	12	6	4					103,60	**033**
4,0	8	15,0	18	54	12	6	4	71,63	**041**	71,63	**041**		
4,0	8		26	54		4	4	68,21	**040**				
4,0	8		47	75		4	4					94,48	**042**
4,0	8	15,0	44	80	12	6	4					102,90	**043**
5,0	9	13,5	18	54	12	6	4	70,76	**051**	70,76	**051**		
5,0	9		26	54		5	4	67,94	**050**				
5,0	9		47	75		5	4					95,34	**052**
5,0	9	13,5	64	100	12	6	4					100,30	**053**
6,0	10		18	54		6	4	70,63	**060**	70,63	**060**		
6,0	10		64	100		6	4					98,77	**062**
7,0	12	15,0	23	59	12	8	4	95,90	**070**	95,90	**070**		
8,0	12		23	59		8	4	87,95	**080**	87,95	**080**		
8,0	12		64	100		8	4					125,70	**082**
9,0	14	17,0	27	67	12	10	4	128,30	**090**	128,30	**090**		
10,0	14	16,0	27	67		10	4	118,90	**100**	118,90	**100**		
10,0	14		60	100		10	4					163,40	**102**
12,0	16		29	74		12	4	160,60	**120**	160,60	**120**		
12,0	16		55	100		12	4					208,90	**122**
14,0	18		30	75		14	4	200,50	**140**	200,50	**140**		
14,0	18	20,0	55	100		14	4					261,40	**142**
16,0	22	24,0	35	83		16	4	251,60	**160**	251,60	**160**		
16,0	22	24,0	102	150		16	4					406,40	**162**
20,0	26	28,0	43	93		20	4	383,60	**200**	383,60	**200**		
20,0	26	28,0	100	150		20	4					561,30	**202**
P								○		○		○	
M													
K													
N													
S													
H								●		●		●	
O													

→ v_c/f_z Page 428+429

14

BlueLine – Torus Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm for Ø ≤ 6,0 mm / ± 0,01 mm for Ø > 6,0 mm
▲ or Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

H | λ_s=30° γ_s= 0° | 54–70 HRC

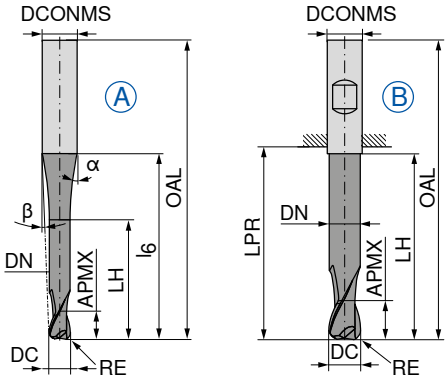

LPR with Shank DIN 6535 HB



Factory standard | Factory standard

DC ±0,01 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	l_6 mm	OAL mm	α° ±0,5	β°	DCONMS h5 mm	ZEFP	Fig.	52 305 ... EUR V1		52 305 ... EUR V1	
1,0	0,2	1,00	0,95	10	21	16,5	57	23	9	6	2	A	178,90	**010**		
1,5	0,3	1,25	1,40	12	21	18,0	57	21	7,5	6	2	A	162,10	**015**		
2,0	0,4	1,50	1,90	16	21	20,0	57	25	6	6	2	A	131,80	**020**		
3,0	0,5	2,00	2,90	20	44	34,5	80	6	2,5	6	2	A	156,40	**030**		
4,0	0,6	2,50	3,90	22	44	35,0	80	4,5	2	6	2	A	147,70	**040**		
5,0	0,8	3,00	4,90	25	44	35,0	80	3,5	1	6	2	A	144,90	**050**		
6,0	1,0	3,50	5,90	29	44		80			6	2	B			136,20	**060**
P														○		○
M																
K																
N																
S																
H														●		●
O																

→ v_c/f_z Page 430+431

BlueLine – Torus Cutter

The all-rounder for machining tempered steel

▲ Radius accuracy: ± 0,005 mm for Ø ≤ 6,0 mm / ± 0,01 mm for Ø > 6,0 mm
▲ or Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

H | λ_s=30° γ_s= 0° | 54–70 HRC

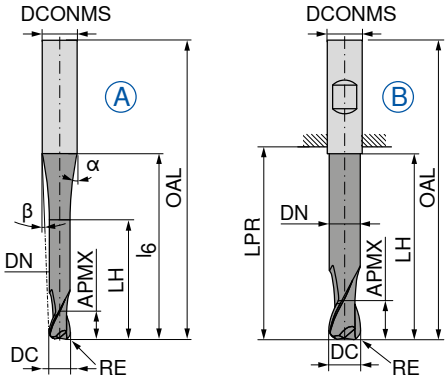

LPR with Shank DIN 6535 HB





Factory standard

Factory standard

DC mm	DC Tol.	RE mm	APMX mm	DN mm	LH mm	LPR mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	ZEFP	Fig.	52 304 ... EUR V1		52 304 ... EUR V1	
0,5	±0,01	0,10	1,0	0,45	2,0	21	20	57	10	8,5	6	2	A	186,20	**005**		
1,0	±0,01	0,25	2,0	0,95	4,0	21	20	57	10	8	6	2	A	183,50	**010**		
1,5	±0,01	0,30	2,5	1,40	7,5	21	20	57	12,5	7	6	2	A	167,60	**015**		
2,0	±0,01	0,50	3,0	1,80	8,0	21	20	57	12	6,5	6	2	A	133,60	**020**		
3,0	±0,01	0,50	3,5	2,80	10,0	21	20	57	11,5	5	6	2	A	130,40	**030**		
4,0	±0,01	1,00	4,0	3,80	12,0	21	20	57	11	3,5	6	2	A	126,40	**040**		
5,0	±0,01	1,50	5,0	4,70	14,0	21	20	57	10	2	6	2	A	131,40	**050**		
6,0	±0,01	2,00	6,0	5,60	20,0	21		57			6	2	B			127,30	**060**
8,0	±0,02	2,00	7,0	7,60	25,0	27		63			8	2	B			164,80	**080**
10,0	±0,02	3,00	8,0	9,60	30,0	32		72			10	2	B			228,90	**100**
12,0	±0,02	4,00	10,0	11,50	35,0	38		83			12	2	B			292,70	**120**
12,0	±0,02	4,00	10,0	11,50	35,0	44	40	92	37	3,5	16	2	A	423,50	**121**		
16,0	±0,02	5,00	12,0	15,50	40,0	44		92			16	2	B			415,00	**160**
P															○		○
M																	
K																	
N																	
S																	
H															●		●
O																	

→ v_c/f_z Page 430+431

BlueLine – Torus Cutter

The all-rounder for machining tempered steel

H | λ_s=30° γ_s= 0° | ≤ 65 HRC | Ti2000

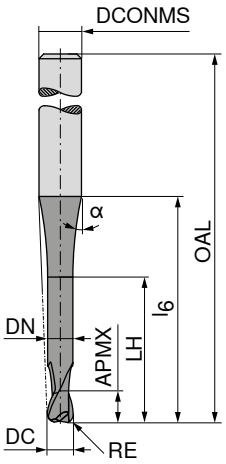

Factory standard

52 361 ...

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	l6 mm	OAL mm	α°	DCONMS h5 mm	ZEFP	EUR V1	
0,8	0,08	1,0	0,75	1,6	27	75	1,5	3	2	84,82	**90801**
1,0	0,10	1,2	0,95	2,0	27	75	1,5	3	2	86,68	**31001**
1,0	0,25	2,0	0,85	4,0	40	80	1,5	6	2	136,70	**01002**
1,2	0,12	1,4	1,15	2,4	27	75	1,5	3	2	85,70	**31201**
1,5	0,15	1,8	1,45	3,0	27	75	1,5	3	2	83,25	**31501**
2,0	0,20	2,4	1,95	4,0	27	75	1,5	3	2	82,54	**32002**
2,0	0,50	2,0	1,80	8,0	40	80	1,5	6	2	132,10	**02005**
3,0	0,30	3,6	2,95	6,0	27	75	1,5	4	2	88,24	**43003**
3,0	0,50	2,0	2,80	12,0	40	80	1,5	6	2	132,10	**03005**
3,0	1,00	2,0	2,80	12,0	40	80	1,5	6	2	132,10	**03010**
4,0	1,00	3,0	3,80	16,0	40	80	1,5	6	2	132,10	**04010**
6,0	1,00	4,0	5,80	25,0	50	100	1,5	8	2	178,90	**06010**
6,0	2,00	4,0	5,80	25,0	50	100	1,5	8	2	178,90	**06020**
8,0	1,00	4,0	7,80	32,0	60	120	1,5	10	2	243,10	**08010**
8,0	2,00	4,0	7,80	32,0	60	120	1,5	10	2	243,10	**08020**
10,0	1,50	6,0	9,80	40,0	80	160	1,5	12	2	379,40	**10015**
12,0	1,50	8,0	11,80	50,0	100	200	1,5	16	2	655,10	**12015**

P	○
M	
K	
N	
S	
H	●
O	

→ v_c/f_z Page 430+431

BlueLine – NC deburring cutter

The all-rounder for machining tempered steel

▲ 52 562 ... / 52 563 ... – Point angle α = 60°
▲ 52 560 ... / 52 561 ... – Point angle α = 90°

H

λ_s = 0°
γ_s=-5°

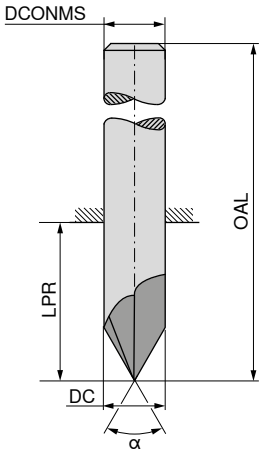

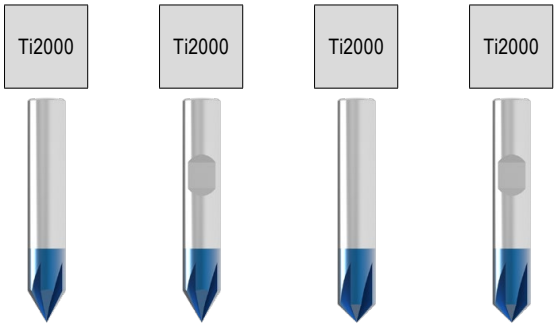

					α = 60° Factory standard		α = 60° Factory standard		α = 90° Factory standard		α = 90° Factory standard	
					52 562 ...		52 563 ...		52 560 ...		52 561 ...	
DC mm	OAL mm	LPR mm	DCONMS mm	ZEFP	EUR V1		EUR V1		EUR V1		EUR V1	
4	50	22	4	5	53,19	04000			53,19	04000		
6	57	21	6	6	67,04	06000	67,04	06000	67,04	06000	67,04	06000
8	63	27	8	6	81,08	08000	81,08	08000	81,08	08000	81,08	08000
10	72	32	10	6	108,60	10000	108,60	10000	108,60	10000	108,60	10000
12	83	38	12	6	140,10	12000	140,10	12000	140,10	12000	140,10	12000
16	92	44	16	8	217,50	16000	217,50	16000	217,50	16000	217,50	16000
P					●		●		●		●	
M												
K												
N												
S												
H					●		●		●		●	
O												

→ v_c/f_z Page 419

14

Micro-end milling cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s=11° | ≤ 62 HRC

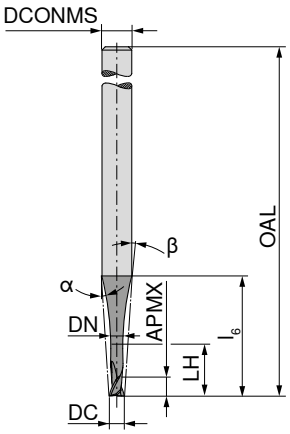

Factory standard | Factory standard

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	T_X	ZEFP	52 802 ... EUR V1		52 802 ... EUR V1	
0,2	0,12	0,16	0,44	5,7	38	15	14	3	2,2 x DC	2	65,34	**021**		
0,2	0,20	0,16	1,00	6,4	38	15	13	3	5 x DC	2	65,34	**023**		
0,2	0,20	0,16	2,00	9,2	38	15	9	3	10 x DC	2	65,34	**025**		
0,2	0,20	0,16	0,44	5,7	43	15	14	3	2,2 x DC	2			65,34	**022**
0,2	0,20	0,16	1,00	6,4	43	15	13	3	5 x DC	2			65,34	**024**
0,2	0,20	0,16	2,00	9,2	43	15	9	3	10 x DC	2			65,34	**026**
0,3	0,18	0,24	0,66	5,8	38	16,5	14	3	2,2 x DC	2	62,67	**03100**		
0,3	0,30	0,24	1,50	6,9	38	16	11,5	3	5 x DC	2	62,67	**03300**		
0,3	0,30	0,24	3,00	9,7	38	13,5	8,5	3	10 x DC	2	62,67	**03500**		
0,4	0,24	0,32	0,88	5,8	38	16,5	13,5	3	2,2 x DC	2	56,60	**04100**		
0,4	0,40	0,32	2,00	7,4	38	15,5	10,5	3	5 x DC	2	56,60	**04300**		
0,4	0,40	0,32	4,00	10,2	38	14	8	3	10 x DC	2	56,60	**04500**		
0,5	0,30	0,40	1,10	5,8	38	15	13	3	2,2 x DC	2	50,13	**051**		
0,5	0,50	0,40	2,50	7,8	38	15	10	3	5 x DC	2	50,13	**053**		
0,5	0,50	0,40	5,00	10,7	38	13	7	3	10 x DC	2	50,13	**055**		
0,5	0,50	0,40	1,10	5,8	43	15	13	3	2,2 x DC	2			50,13	**052**
0,5	0,50	0,40	2,50	7,8	43	15	10	3	5 x DC	2			50,13	**054**
0,5	0,50	0,40	5,00	14,5	43	13	5	3	10 x DC	2			50,13	**056**
0,6	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	51,72	**06100**		
0,6	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	51,72	**06300**		
0,6	0,60	0,48	6,00	11,6	38	14	6,5	3	10 x DC	2	51,72	**06500**		
0,7	0,42	0,56	1,54	5,9	38	16,5	11,5	3	2,2 x DC	2	57,78	**07100**		
0,7	0,70	0,56	3,50	8,8	38	14,5	8	3	5 x DC	2	57,78	**07300**		
0,7	0,70	0,56	7,00	12,5	38	14	6	3	10 x DC	2	57,78	**07500**		
0,8	0,48	0,64	1,76	5,9	38	15	11	3	2,2 x DC	2	57,80	**081**		
0,8	0,80	0,64	4,00	9,0	38	15	7	3	5 x DC	2	57,80	**083**		
0,8	0,80	0,64	8,00	13,5	38	12	5	3	10 x DC	2	57,80	**085**		
0,8	0,80	0,64	1,76	5,9	43	15	11	3	2,2 x DC	2			57,80	**082**
0,8	0,80	0,64	4,00	9,0	43	15	7	3	5 x DC	2			57,80	**084**
0,8	0,80	0,64	8,00	15,5	43	9,8	5	3	10 x DC	2			57,80	**086**
0,9	0,54	0,72	1,98	5,9	38	17	10,5	3	2,2 x DC	2	49,75	**09100**		
0,9	0,90	0,72	4,50	9,5	38	14	7	3	5 x DC	2	49,75	**09300**		
0,9	0,90	0,72	9,00	14,4	38	13	5	3	10 x DC	2	49,75	**09500**		
1,0	0,60	0,80	2,20	5,9	38	15	10	3	2,2 x DC	2	48,09	**101**		
1,0	1,00	0,80	2,20	5,9	43	15	10	3	2,2 x DC	2			48,09	**102**
1,0	1,00	0,80	5,00	9,7	43	15	6	3	5 x DC	2	48,09	**103**		
1,0	1,00	0,80	10,00	15,3	43	11	4	3	10 x DC	2	49,53	**105**		
1,0	1,00	0,80	5,00	9,7	50	15	6	3	5 x DC	2			48,09	**104**
1,0	1,00	0,80	10,00	20,6	50	8,5	3	3	10 x DC	2			49,53	**106**
1,1	0,66	0,88	2,42	6,0	38	17	9,5	3	2,2 x DC	2	48,56	**11100**		
1,1	1,10	0,88	5,50	10,0	43	14	6	3	5 x DC	2	48,56	**11300**		

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-end milling cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s=11° | ≤ 62 HRC



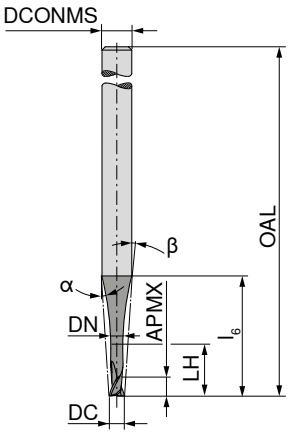

Factory standard | Factory standard

DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	T_X	ZEFP	52 802 ... EUR V1		52 802 ... EUR V1	
1,1	1,10	0,88	11,00	15,9	43	13	4	3	10 x DC	2	48,56	**11500**		
1,2	0,72	0,96	2,64	6,0	38	17	9	3	2,2 x DC	2	48,56	**12100**		
1,2	1,20	0,96	6,00	10,5	43	13,5	5,5	3	5 x DC	2	48,56	**12300**		
1,2	1,20	0,96	12,00	16,5	43	13,5	4	3	10 x DC	2	48,56	**12500**		
1,3	0,78	1,04	2,86	6,0	38	17	8,5	3	2,2 x DC	2	48,44	**13100**		
1,3	1,30	1,04	6,50	11,0	43	12,5	5	3	5 x DC	2	48,44	**13300**		
1,3	1,30	1,04	13,00	17,1	43	14	3,5	3	10 x DC	2	48,44	**13500**		
1,4	0,84	1,12	3,08	6,1	38	17	8	3	2,2 x DC	2	48,44	**14100**		
1,4	1,40	1,12	7,00	11,5	43	12	4,5	3	5 x DC	2	48,44	**14300**		
1,4	1,40	1,12	14,00	17,6	43	15	3,5	3	10 x DC	2	48,44	**14500**		
1,5	0,90	1,20	3,30	6,1	38	15	8	3	2,2 x DC	2	51,86	**151**		
1,5	1,50	1,20	3,30	6,1	43	15	8	3	2,2 x DC	2			51,86	**152**
1,5	1,50	1,20	7,50	11,8	43	14	4	3	5 x DC	2	51,86	**153**		
1,5	1,50	1,20	15,00	18,1	43	14,6	3	3	10 x DC	2	55,35	**155**		
1,5	1,50	1,20	7,50	11,8	50	14	4	3	5 x DC	2			51,86	**154**
1,5	1,50	1,20	15,00	22,0	50	6,2	2	3	10 x DC	2			55,35	**156**
1,6	0,96	1,28	3,52	6,2	38	16,5	7	3	2,2 x DC	2	49,61	**16100**		
1,6	1,60	1,28	8,00	12,0	43	12	4	3	5 x DC	2	49,61	**16300**		
1,6	1,60	1,28	16,00	18,7	43	17	3	3	10 x DC	2	49,61	**16500**		
1,7	1,02	1,36	3,74	6,2	38	17	6,5	3	2,2 x DC	2	51,99	**17100**		
1,7	1,70	1,36	8,50	12,5	43	11	3,5	3	5 x DC	2	51,99	**17300**		
1,7	1,70	1,36	17,00	19,3	43	18,5	2,5	3	10 x DC	2	51,99	**17500**		
1,8	1,08	1,44	3,96	6,2	38	15	6	3	2,2 x DC	2	51,86	**181**		
1,8	1,80	1,44	3,96	6,2	43	15	6	3	2,2 x DC	2			51,86	**182**
1,8	1,80	1,44	9,00	12,9	43	12	3	3	5 x DC	2	52,46	**183**		
1,8	1,80	1,44	18,00	20,0	43	19,8	2	3	10 x DC	2	58,54	**185**		
1,8	1,80	1,44	9,00	12,9	50	12	3	3	5 x DC	2			52,46	**184**
1,8	1,80	1,44	18,00	22,0	50	5,3	2	3	10 x DC	2			58,54	**186**
1,9	1,14	1,52	4,18	6,2	38	17,5	5,5	3	2,2 x DC	2	52,79	**19100**		
1,9	1,90	1,52	9,50	13,2	43	10	3	3	5 x DC	2	52,79	**19300**		
1,9	1,90	1,52	19,00	20,5	43	23,5	2,5	3	10 x DC	2	52,79	**19500**		
2,0	1,20	1,60	4,40	11,9	50	15	10	6	2,2 x DC	2	51,86	**201**		
2,0	2,00	1,60	10,00	19,7	50	15	6	6	5 x DC	2	52,46	**203**		
2,0	2,00	1,60	20,00	25,0	50	22,1	5	6	10 x DC	2	58,54	**205**		
2,0	2,00	1,60	4,40	11,9	57	15	10	6	2,2 x DC	2			51,86	**202**
2,0	2,00	1,60	10,00	19,7	57	15	6	6	5 x DC	2			52,46	**204**
2,0	2,00	1,60	20,00	29,0	57	7,8	4	6	10 x DC	2			58,54	**206**

P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	○	○

→ v_c/f_z Page 432–439

14

Micro-ball nosed cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s= 6° | ≤ 62 HRC

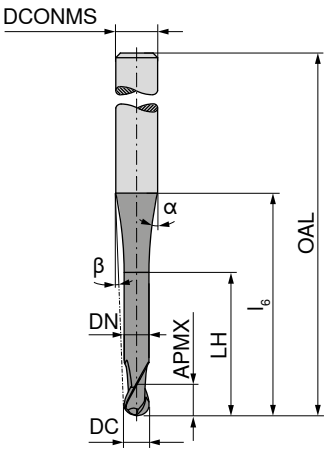

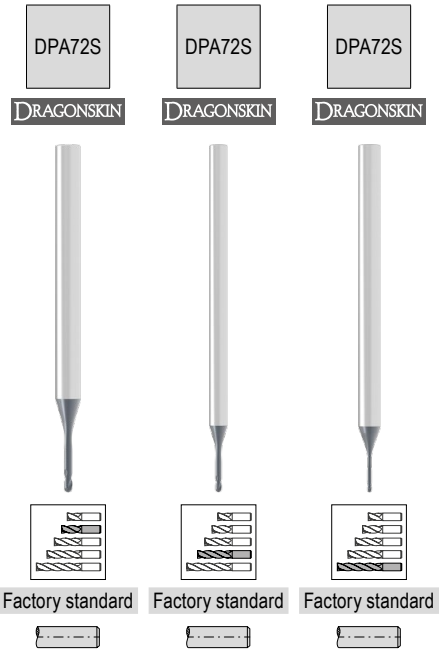

Factory standard | Factory standard | Factory standard

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 804 ... EUR V1		52 804 ... EUR V1		52 804 ... EUR V1	
0,2	0,12	0,16	0,44	5,7	38	15	14	3	2,2 x DC	2	73,02	**021**				
0,2	0,20	0,16	1,00	6,4	38	15	13	3	5 x DC	2	73,02	**024**				
0,2	0,20	0,16	2,00	9,2	38	15	9	3	10 x DC	2	73,02	**027**				
0,2	0,12	0,16	0,44	5,7	50	15	14	3	2,2 x DC	2			73,02	**022**		
0,2	0,20	0,16	1,00	6,4	50	15	13	3	5 x DC	2			73,02	**025**		
0,2	0,20	0,16	2,00	9,2	50	15	9	3	10 x DC	2			73,02	**028**		
0,2	0,12	0,16	0,44	11,3	80	15	15	6	2,2 x DC	2					73,02	**023**
0,2	0,20	0,16	1,00	12,0	80	15	14	6	5 x DC	2					73,02	**026**
0,2	0,20	0,16	2,00	14,8	80	15	12	6	10 x DC	2					73,02	**029**
0,3	0,18	0,24	0,66	5,8	38	16,5	14	3	2,2 x DC	2	72,28	**03100**				
0,3	0,30	0,24	1,50	6,9	38	16	11,5	3	5 x DC	2	72,28	**03400**				
0,3	0,30	0,24	3,00	9,7	38	13,5	8,5	3	10 x DC	2	72,28	**03700**				
0,4	0,24	0,32	0,88	5,8	38	16,5	13	3	2,2 x DC	2	65,56	**04100**				
0,4	0,40	0,32	2,00	7,4	38	15,5	10,5	3	5 x DC	2	65,56	**04400**				
0,4	0,40	0,32	4,00	10,2	38	14	8	3	10 x DC	2	65,56	**04700**				
0,5	0,30	0,40	1,10	5,8	38	15	13	3	2,2 x DC	2	56,94	**051**				
0,5	0,50	0,40	2,50	7,8	38	15	10	3	5 x DC	2	56,94	**054**				
0,5	0,50	0,40	5,00	10,7	38	13	7	3	10 x DC	2	56,94	**057**				
0,5	0,30	0,40	1,10	5,8	50	15	13	3	2,2 x DC	2			56,94	**052**		
0,5	0,50	0,40	2,50	7,8	50	15	10	3	5 x DC	2			56,94	**055**		
0,5	0,50	0,40	5,00	14,5	50	13	5	3	10 x DC	2			56,94	**058**		
0,5	0,30	0,40	1,10	11,4	80	15	14	6	2,2 x DC	2					56,94	**053**
0,5	0,50	0,40	2,50	13,4	80	15	12	6	5 x DC	2					56,94	**056**
0,5	0,50	0,40	5,00	20,2	80	15	8	6	10 x DC	2					56,94	**059**
0,6	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	59,25	**06100**				
0,6	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	59,25	**06400**				
0,6	0,60	0,48	6,00	10,6	38	17	7	3	10 x DC	2	59,25	**06700**				
0,7	0,42	0,56	1,54	5,9	38	16,5	11,5	3	2,2 x DC	2	62,28	**07100**				
0,7	0,70	0,56	3,50	8,8	38	14	8	3	5 x DC	2	62,28	**07400**				
0,7	0,70	0,56	7,00	10,6	38	20,5	7	3	10 x DC	2	62,28	**07700**				
0,8	0,48	0,64	1,76	5,9	38	15	11	3	2,2 x DC	2	64,32	**081**				
0,8	0,80	0,64	4,00	9,0	38	15	7	3	5 x DC	2	64,32	**084**				
0,8	0,80	0,64	8,00	10,5	38	8,2	6	3	10 x DC	2	64,90	**087**				
0,8	0,48	0,64	1,76	5,9	50	15	11	3	2,2 x DC	2			64,32	**082**		
0,8	0,80	0,64	4,00	9,0	50	15	7	3	5 x DC	2			64,32	**085**		
0,8	0,80	0,64	8,00	18,7	50	9,8	4	3	10 x DC	2			64,90	**088**		
0,8	0,48	0,64	1,76	11,5	80	15	13	6	2,2 x DC	2					64,32	**083**

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-ball nosed cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth



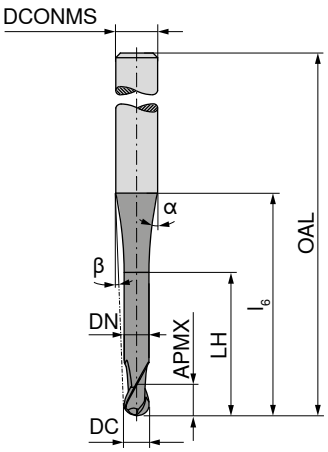

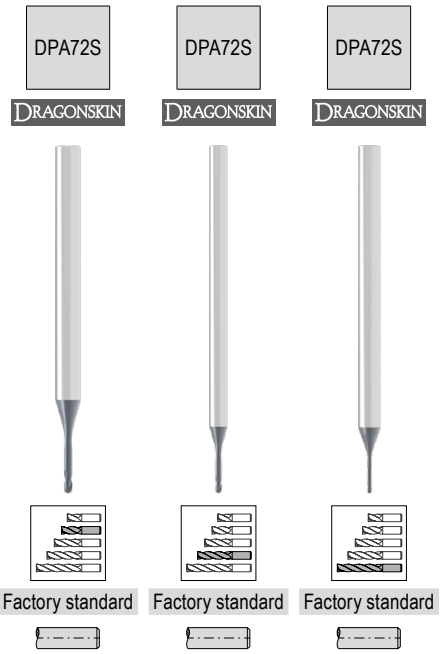

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 804 ... EUR V1		52 804 ... EUR V1		52 804 ... EUR V1	
0,8	0,80	0,64	4,00	14,6	80	15	11	6	5 x DC	2					64,32	**086**
0,8	0,80	0,64	8,00	25,9	80	14,8	6	6	10 x DC	2					64,90	**089**
0,9	0,54	0,72	1,98	5,9	38	17	10,5	3	2,2 x DC	2	64,24	**09100**				
0,9	0,90	0,72	4,50	9,5	38	14	7	3	5 x DC	2	64,24	**09400**				
0,9	0,90	0,72	9,00	10,5	38	39,5	6,5	3	10 x DC	2	64,24	**09700**				
1,0	0,60	0,80	2,20	7,8	43	15	11	4	2,2 x DC	2	54,62	**101**				
1,0	1,00	0,80	5,00	11,6	43	15	8	4	5 x DC	2	54,62	**104**				
1,0	1,00	0,80	10,00	18,3	43	8	5	4	10 x DC	2	58,67	**107**				
1,0	0,60	0,80	2,20	7,8	60	15	11	4	2,2 x DC	2			54,62	**102**		
1,0	1,00	0,80	5,00	11,6	60	15	8	4	5 x DC	2			54,62	**105**		
1,0	1,00	0,80	10,00	23,7	60	10,2	4	4	10 x DC	2			58,67	**108**		
1,0	0,60	0,80	2,20	11,5	80	15	13	6	2,2 x DC	2					54,62	**103**
1,0	1,00	0,80	5,00	15,3	80	15	10	6	5 x DC	2					54,62	**106**
1,0	1,00	0,80	10,00	28,7	80	13	5	6	10 x DC	2					58,67	**109**
1,1	0,66	0,88	2,42	7,9	43	16,5	11	4	2,2 x DC	2	58,94	**11100**				
1,1	1,10	0,88	5,50	12,0	43	14,5	7,5	4	5 x DC	2	58,94	**11400**				
1,1	1,10	0,88	11,00	18,3	43	13,5	5,5	4	10 x DC	2	58,94	**11700**				
1,2	0,72	0,96	2,64	7,9	43	15	11	4	2,2 x DC	2	60,53	**121**				
1,2	1,20	0,96	6,00	12,4	43	15	7	4	5 x DC	2	60,53	**124**				
1,2	1,20	0,96	12,00	18,2	43	9,3	5	4	10 x DC	2	62,86	**127**				
1,2	0,72	0,96	2,64	7,9	60	15	11	4	2,2 x DC	2			60,53	**122**		
1,2	1,20	0,96	6,00	12,4	60	15	7	4	5 x DC	2			60,53	**125**		
1,2	1,20	0,96	12,00	26,1	60	9,1	4	4	10 x DC	2			62,86	**128**		
1,2	0,72	0,96	2,64	11,6	80	15	12	6	2,2 x DC	2					60,53	**123**
1,2	1,20	0,96	6,00	16,2	80	15	9	6	5 x DC	2					60,53	**126**
1,2	1,20	0,96	12,00	31,8	80	11,7	5	6	10 x DC	2					62,86	**129**
1,3	0,78	1,04	2,86	8,0	43	16,5	10,5	4	2,2 x DC	2	59,05	**13100**				
1,3	1,30	1,04	6,50	12,8	43	14	6,5	4	5 x DC	2	59,05	**13400**				
1,3	1,30	1,04	13,00	18,2	43	17	5	4	10 x DC	2	59,05	**13700**				
1,4	0,84	1,12	3,08	8,0	43	16,5	10	4	2,2 x DC	2	59,30	**14100**				
1,4	1,40	1,12	7,00	13,2	43	14	6,5	4	5 x DC	2	59,30	**14400**				
1,4	1,40	1,12	14,00	18,1	43	20,5	5	4	10 x DC	2	59,30	**14700**				
1,5	0,90	1,20	3,30	8,0	43	15	9	4	2,2 x DC	2	57,08	**151**				
1,5	1,50	1,20	7,50	13,7	43	15	6	4	5 x DC	2	60,42	**154**				
1,5	1,50	1,20	15,00	18,1	43	13,5	4	4	10 x DC	2	60,42	**157**				
1,5	0,90	1,20	3,30	8,0	60	15	9	4	2,2 x DC	2			57,08	**152**		
1,5	1,50	1,20	7,50	13,7	60	15	6	4	5 x DC	2			60,42	**155**		

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-ball nosed cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s= 6° | ≤ 62 HRC

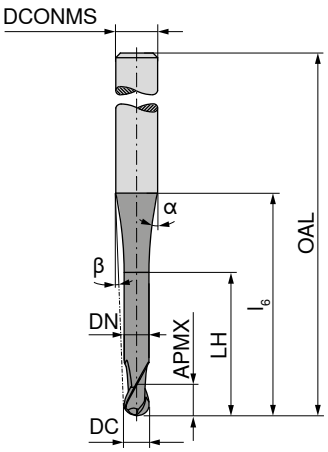

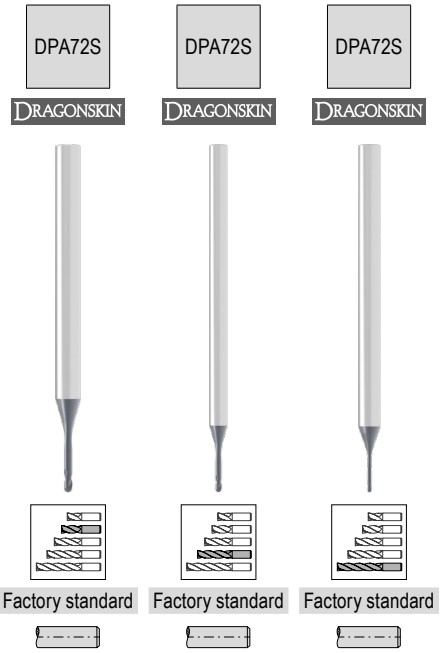

Factory standard | Factory standard | Factory standard

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 804 ... EUR V1		52 804 ... EUR V1		52 804 ... EUR V1	
1,5	1,50	1,20	15,00	28,0	60	7,8	3	4	10 x DC	2			60,42	**158**		
1,5	0,90	1,20	3,30	11,7	80	15	11	6	2,2 x DC	2					57,08	**153**
1,5	1,50	1,20	7,50	17,4	80	15	8	6	5 x DC	2					60,42	**156**
1,5	1,50	1,20	15,00	35,8	80	10,2	4	6	10 x DC	2					60,42	**159**
1,6	0,96	1,28	3,52	8,1	43	16,5	9	4	2,2 x DC	2	57,93	**16100**				
1,6	1,60	1,28	8,00	14,1	43	13	5,5	4	5 x DC	2	57,93	**16400**				
1,6	1,60	1,28	16,00	18,5	43	29,5	4,5	4	10 x DC	2	57,93	**16700**				
1,7	1,02	1,36	3,74	8,1	43	16,5	9	4	2,2 x DC	2	60,39	**17100**				
1,7	1,70	1,36	8,50	14,5	43	12,5	5	4	5 x DC	2	60,39	**17400**				
1,7	1,70	1,36	17,00	18,9	43	35,5	4	4	10 x DC	2	60,39	**17700**				
1,8	1,08	1,44	3,96	8,1	43	15	8	4	2,2 x DC	2	60,42	**181**				
1,8	1,80	1,44	9,00	15,0	43	15	5	4	5 x DC	2	60,42	**184**				
1,8	1,80	1,44	18,00	19,5	43	31,1	4	4	10 x DC	2	62,86	**187**				
1,8	1,08	1,44	3,96	8,1	60	15	8	4	2,2 x DC	2			60,42	**182**		
1,8	1,80	1,44	9,00	15,0	60	15	5	4	5 x DC	2			60,42	**185**		
1,8	1,80	1,44	18,00	31,9	60	6,8	2	4	10 x DC	2			62,86	**188**		
1,8	1,08	1,44	3,96	11,8	80	15	11	6	2,2 x DC	2					60,42	**183**
1,8	1,80	1,44	9,00	18,7	80	15	7	6	5 x DC	2					60,42	**186**
1,8	1,80	1,44	18,00	39,3	80	9,1	4	6	10 x DC	2					62,86	**189**
1,9	1,14	1,52	4,18	8,2	43	16,5	8	4	2,2 x DC	2	61,28	**19100**				
1,9	1,90	1,52	9,50	15,5	43	11,5	4,5	4	5 x DC	2	61,28	**19400**				
1,9	1,90	1,52	19,00	19,9	43	54,5	3,5	4	10 x DC	2	61,28	**19700**				
2,0	1,20	1,60	4,40	11,9	57	15	10	6	2,2 x DC	2	56,94	**201**				
2,0	2,00	1,60	10,00	19,7	57	15	6	6	5 x DC	2	60,42	**204**				
2,0	2,00	1,60	20,00	32,0	57	9,5	4	6	10 x DC	2	60,42	**207**				
2,0	1,20	1,60	4,40	11,9	70	15	10	6	2,2 x DC	2			56,94	**202**		
2,0	2,00	1,60	10,00	19,7	70	15	6	6	5 x DC	2			60,42	**205**		
2,0	2,00	1,60	20,00	41,4	70	8,5	3	6	10 x DC	2			60,42	**208**		
2,0	1,20	1,60	4,40	11,9	80	15	10	6	2,2 x DC	2					56,94	**203**
2,0	2,00	1,60	10,00	19,7	80	15	6	6	5 x DC	2					60,42	**206**
2,0	2,00	1,60	20,00	41,4	80	8,5	3	6	10 x DC	2					60,42	**209**

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

Micro-torus cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth

N | λ_s=30° γ_s=12° | ≤ 62 HRC

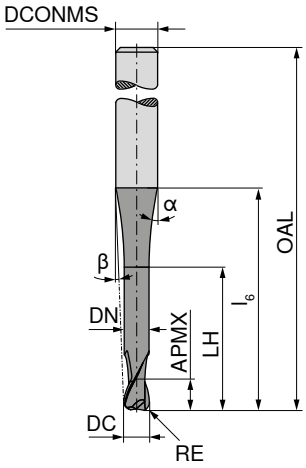

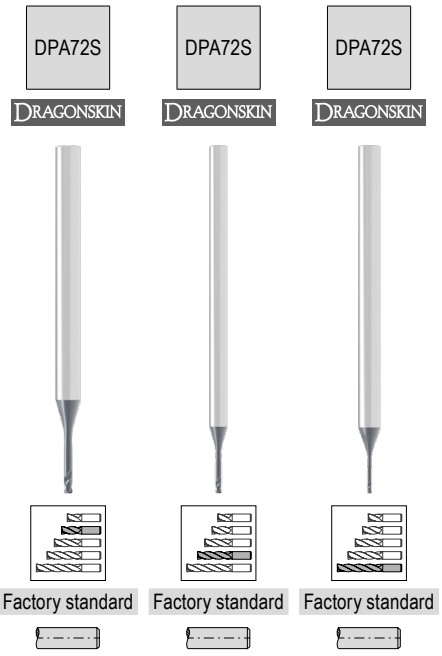

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	52 806 ... EUR V1		52 806 ... EUR V1		52 806 ... EUR V1	
0,5	0,1	0,30	0,40	1,10	5,8	38	15	13	3	2,2 x DC	2	58,08	**051**				
0,5	0,1	0,50	0,40	2,50	7,8	38	15	10	3	5 x DC	2	58,08	**054**				
0,5	0,1	0,50	0,40	5,00	10,7	38	13	7	3	10 x DC	2	58,08	**057**				
0,5	0,1	0,30	0,40	1,10	5,8	50	15	13	3	2,2 x DC	2			58,08	**052**		
0,5	0,1	0,50	0,40	2,50	7,8	50	15	10	3	5 x DC	2			58,08	**055**		
0,5	0,1	0,50	0,40	5,00	14,5	50	13	5	3	10 x DC	2			58,08	**058**		
0,5	0,1	0,30	0,40	1,10	11,4	80	15	14	6	2,2 x DC	2					58,08	**053**
0,5	0,1	0,50	0,40	2,50	13,4	80	15	12	6	5 x DC	2					58,08	**056**
0,5	0,1	0,50	0,40	5,00	20,2	80	15	8	6	10 x DC	2					58,08	**059**
0,6	0,1	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	59,25	**06101**				
0,6	0,1	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	59,25	**06401**				
0,6	0,1	0,60	0,48	6,00	10,6	38	17	7	3	10 x DC	2	59,25	**06701**				
0,8	0,2	0,48	0,64	1,76	5,9	38	16,5	11	3	2,2 x DC	2	62,28	**08102**				
0,8	0,2	0,80	0,64	4,00	9,0	38	14,5	7,5	3	5 x DC	2	62,28	**08402**				
0,8	0,2	0,80	0,64	8,00	10,5	38	27	6,5	3	10 x DC	2	62,28	**08702**				
1,0	0,2	0,60	0,80	2,20	7,8	43	15	11	4	2,2 x DC	2	55,48	**101**				
1,0	0,2	1,00	0,80	5,00	11,6	43	15	8	4	5 x DC	2	59,81	**104**				
1,0	0,2	1,00	0,80	10,00	18,3	43	8	5	4	10 x DC	2	59,81	**107**				
1,0	0,2	0,60	0,80	2,20	7,8	60	15	11	4	2,2 x DC	2			55,48	**102**		
1,0	0,2	1,00	0,80	5,00	11,6	60	15	8	4	5 x DC	2			59,81	**105**		
1,0	0,2	1,00	0,80	10,00	23,7	60	10,2	4	4	10 x DC	2			59,81	**108**		
1,0	0,2	0,60	0,80	2,20	11,5	80	15	13	6	2,2 x DC	2					55,48	**103**
1,0	0,2	1,00	0,80	5,00	15,3	80	15	10	6	5 x DC	2					59,81	**106**
1,0	0,2	1,00	0,80	10,00	28,7	80	13	5	6	10 x DC	2					59,81	**109**
1,2	0,2	0,72	0,96	2,64	7,9	43	16,5	10,5	4	2,2 x DC	2	58,94	**12102**				
1,2	0,2	1,20	0,96	6,00	12,4	43	14,5	7	4	5 x DC	2	58,94	**12402**				
1,2	0,2	1,20	0,96	12,00	18,2	43	15	5	4	10 x DC	2	58,94	**12702**				
1,5	0,3	0,90	1,20	3,30	8,0	43	15	9	4	2,2 x DC	2	58,23	**151**				
1,5	0,3	1,50	1,20	7,50	13,7	43	15	6	4	5 x DC	2	61,73	**154**				
1,5	0,3	1,50	1,20	15,00	18,1	43	24	4	4	10 x DC	2	61,73	**157**				
1,5	0,3	0,90	1,20	3,30	8,0	60	15	9	4	2,2 x DC	2			58,23	**152**		
1,5	0,3	1,50	1,20	7,50	13,7	60	15	6	4	5 x DC	2			61,73	**155**		
1,5	0,3	1,50	1,20	15,00	29,2	60	7,8	3	4	10 x DC	2			61,73	**158**		
1,5	0,3	0,90	1,20	3,30	11,7	80	15	11	6	2,2 x DC	2					58,23	**153**
1,5	0,3	1,50	1,20	7,50	17,4	80	15	8	6	5 x DC	2					61,73	**156**
1,5	0,3	1,50	1,20	15,00	35,8	80	10,2	4	6	10 x DC	2					61,73	**159**
1,6	0,3	0,96	1,28	3,52	8,1	43	16,5	9	4	2,2 x DC	2	57,93	**16103**				

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

Continued on next page

Micro-torus cutter

The universal milling cutter for micro-cutting

▲ T_x = maximum engagement depth



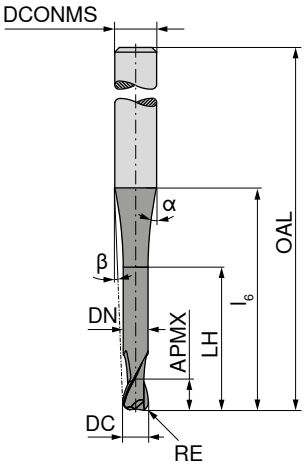

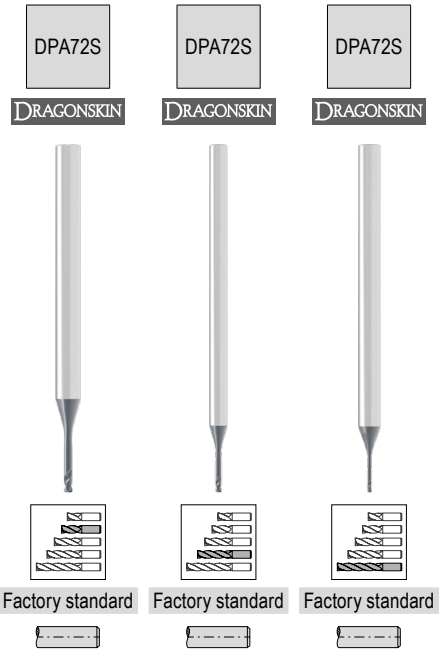

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_X	ZEFP	52 806 ... EUR V1		52 806 ... EUR V1		52 806 ... EUR V1	
1,6	0,3	1,60	1,28	8,00	14,1	43	13	5,5	4	5 x DC	2	57,93	**16403**				
1,6	0,3	1,60	1,28	16,00	18,5	43	29,5	4,5	4	10 x DC	2	57,93	**16703**				
1,8	0,4	1,08	1,44	3,96	8,1	43	16,5	8,5	4	2,2 x DC	2	60,39	**18104**				
1,8	0,4	1,80	1,44	9,00	15,0	43	12	5	4	5 x DC	2	60,39	**18404**				
1,8	0,4	1,80	1,44	18,00	19,5	43	41	4	4	10 x DC	2	60,39	**18704**				
2,0	0,5	1,20	1,60	4,40	11,9	57	15	10	6	2,2 x DC	2	58,08	**201**				
2,0	0,5	2,00	1,60	10,00	19,7	57	15	6	6	5 x DC	2	61,73	**204**				
2,0	0,5	2,00	1,60	20,00	32,0	57	9,5	4	6	10 x DC	2	61,73	**207**				
2,0	0,5	1,20	1,60	4,40	11,9	70	15	10	6	2,2 x DC	2			58,08	**202**		
2,0	0,5	2,00	1,60	10,00	19,7	70	15	6	6	5 x DC	2			61,73	**205**		
2,0	0,5	2,00	1,60	20,00	41,4	70	8,5	3	6	10 x DC	2			61,73	**208**		
2,0	0,5	1,20	1,60	4,40	11,9	80	15	10	6	2,2 x DC	2					58,08	**203**
2,0	0,5	2,00	1,60	10,00	19,7	80	15	6	6	5 x DC	2					61,73	**206**
2,0	0,5	2,00	1,60	20,00	41,4	80	8,5	3	6	10 x DC	2					61,73	**209**

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	●	●	●
H	○	○	○
O	○	○	○

→ v_c/f_z Page 432–439

MultiLock – Ball Nosed Cutter

The sustainable exchangeable head system

▲ KLG = Coupling Size





DC mm	KLG	APMX mm	LPR mm	ZEFP	Factory standard 53 803 ... EUR W2/5E		Factory standard 53 804 ... EUR W2/5E	
12	EL12	7,0	9	4	65,59	**01200**	59,02	**01200**
16	EL16	9,5	12	4	85,31	**01600**	78,73	**01600**
20	EL20	12,0	15	4	105,00	**02000**	98,45	**02000**
25	EL25	16,0	19	4	118,20	**02500**	111,60	**02500**

P		●
M		○
K		●
N		○
S	●	
H		
O		

→ v_c/f_z Page 440

MultiLock – Torus Cutter

The sustainable exchangeable head system

▲ KLG = Coupling Size

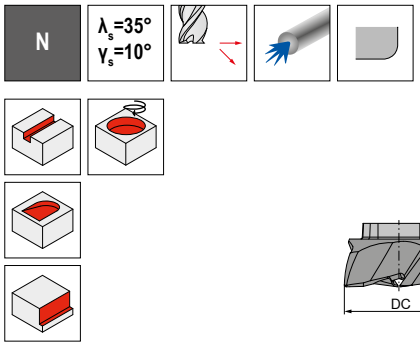





DC mm	RE mm	KLG	APMX mm	LPR mm	ZEFP	Factory standard 53 805 ... EUR W2/5E		Factory standard 53 806 ... EUR W2/5E	
12	0,2	EL12	3,0	5	4	59,02	**01205**	52,46	**01205**
16	0,3	EL16	4,5	7	4	78,73	**01607**	72,16	**01607**
20	0,3	EL20	6,0	8	5	98,45	**02008**	91,88	**02008**
25	0,5	EL25	8,0	10	6	111,60	**02510**	105,00	**02510**

P		●
M		○
K		●
N		○
S	●	
H		
O		

→ v_c/f_z Page 441

MultiLock – High Feed Cutter

The sustainable exchangeable head system

▲ KLG = Coupling size
▲ r_{3d} = programmed corner radius
▲ APMX does not correspond to the maximum depth of cut







DCX mm	KLG	r_{3D} mm	APMX mm	LPR mm	ZEFP	Factory standard 53 801 ... EUR W2/5E		Factory standard 53 802 ... EUR W2/5E	
12	EL12	0,7	3,18	4	5	65,59	01202	59,02	01202
16	EL16	1,2	3,73	5	6	85,31	01605	78,73	01605
20	EL20	1,2	4,31	6	6	98,45	02005	91,88	02005
25	EL25	1,2	5,32	7	6	118,20	02505	111,60	02505

P		●
M		○
K		●
N		
S	●	
H		
O		

→ v_c/f_z Page 442

MultiLock – Deburring Cutter

The sustainable exchangeable head system

▲ KLG = Coupling Size





DCX mm	KLG	APMX mm	DC mm	LPR mm	ZEFP	Factory standard 53 800 ... EUR W2/5E	
12	EL12	4	4	8	4	60,33	01200
16	EL16	6	4	12	4	80,04	01600

P		●
M		○
K		●
N		○
S		
H		
O		

→ v_c/f_z Page 443

MultiLock – Holders

▲ KLG = Coupling Size

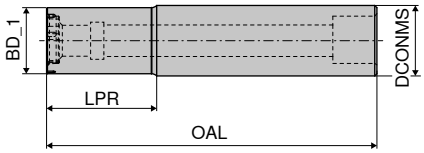

KLG	BD_1 mm	DCONMS mm	OAL mm	LPR mm	84 050 ... EUR W1/5D		84 051 ... EUR W1/5D	
EL12	11	12	66	20	126,30	01200	126,30	01200
EL16	15	16	75	25	138,00	01600	138,00	01600
EL20	19	20	77	25	150,80	02000	150,80	02000
EL25	24	25	87	30	166,40	02500	166,40	02500

Cylindrical screw

TORX® blade

Key D

Molykote

Clamping screw

Threaded bush

Torque screwdriver

Bit

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7		80 398 ... EUR Y7	
84 051 01200 / 84 050 01200	1,46	42000	6,78	054	11,79	120	5,64	303	5,01	41900	7,43	42100	170,10	193	6,64	03500
84 051 01600 / 84 050 01600	1,76	42300	6,78	055	12,62	121	5,64	303	5,96	42200	8,93	42400	170,10	193	6,64	04500
84 051 02000 / 84 050 02000	1,76	42300	6,78	055	12,62	121	5,64	303	5,96	42200	8,93	42400	170,10	193	6,64	04500
84 051 02500 / 84 050 02500	2,16	42600	6,78	055	12,62	121	5,64	303	11,36	42500	8,24	42700	170,10	193	4,90	06000

MultiLock – Screw-in adapter, type A

▲ KLG = Coupling size

▲ For high-feed and torus cutters

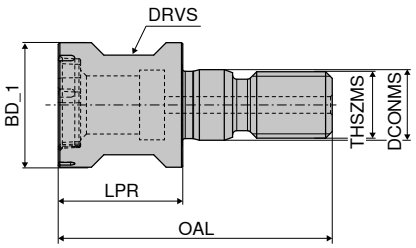

KLG	BD_1 mm	THSZMS	OAL mm	LPR mm	DCONMS mm	DRVS mm	84 052 ... EUR W1/5D	
EL12	11	M6	28	13	6,5	9	132,80	01200
EL16	15	M8	33	14	8,5	12	144,50	01600
EL20	19	M10	37	18	10,5	15	157,30	02000
EL25	24	M12	42	20	12,5	17	184,40	02500

TORX® blade

Key D

Molykote

Clamping screw

Threaded bush

Torque screwdriver

Bit

Spare parts for Article no.	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7		80 398 ... EUR Y7	
84 052 01200	6,78	054	11,79	120	5,64	303	5,01	41900	7,43	42100	170,10	193	6,64	03500		
84 052 01600	6,78	055	12,62	121	5,64	303	5,96	42200	8,93	42400	170,10	193	6,64	04500		
84 052 02000	6,78	055	12,62	121	5,64	303	5,96	42200	8,93	42400	170,10	193	6,64	04500		
84 052 02500	6,78	055	12,62	121	5,64	303	11,36	42500	8,24	42700	170,10	193	4,90	06000		

14

MultiLock – Screw-in adapter, type B

▲ KLG = Coupling size
▲ For radius milling and deburring cutters

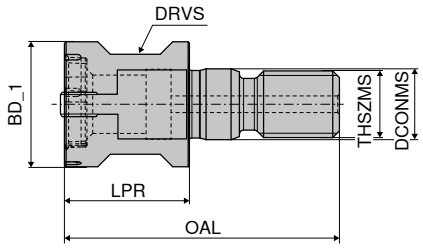

KLG	BD_1 mm	THSZMS	OAL mm	LPR mm	DCONMS mm	DRVS mm	84 053 ... EUR W1/5D	
EL12	11	M6	28	13	6,5	9	148,30	**01200**
EL16	15	M8	33	14	8,5	12	161,20	**01600**
EL20	20	M10	37	18	10,5	15	174,10	**02000**
EL25	25	M12	42	20	12,5	17	205,00	**02500**

Spare parts for Article no.	TORX® blade 80 950 ... EUR Y7		Clamping screw 84 950 ... EUR W1/5D		Key D 80 950 ... EUR Y7		Molykote 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7		Mounting bush 84 950 ... EUR W1/5D	
84 053 01200	6,78	**054**	52,57	**18600**	11,79	**120**	5,64	**303**	170,10	**193**	110,90	**18000**
84 053 01600	6,78	**055**	57,18	**18800**	12,62	**121**	5,64	**303**	170,10	**193**	120,60	**18100**
84 053 02000	6,78	**055**	61,77	**18700**	12,62	**121**	5,64	**303**	170,10	**193**	130,20	**18200**
84 053 02500	6,78	**055**	72,28	**18900**	12,62	**121**	5,64	**303**	170,10	**193**	153,50	**18300**

Information on how to correctly assemble the MultiLock adapters can be found on → **page 490**.

MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads

→ Chapter 2, Solid carbide drilling

Page No. 2|107

Solid Carbide NC Spot Drills

Ø 8, 10, 12, 16, 20 mm
NOF 2

SIG 90°

SIG 120°

SIG 142°

→ Chapter 4, Reaming and countersinking

Page No. 4|18 + 4|19

Replaceable reaming heads

Ø 8,00 – 30,20 mm

Through hole

Ø 12,20 – 30,20 mm

Blind hole

→ Chapter 14, Solid carbide milling cutters

Page No. 14|198 – 14|202

Solid carbide shoulder mills
Ø 8, 10, 12, 16, 20 mm /
ZEFP 3+4

Type PCR-UNI

Type PCR-ALU

Type N

Solid carbide torus bull nose milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4


Type W

Type N

Solid carbide rough and finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6

Type NF

Solid carbide finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide ball-nosed end mills
Ø 10, 12, 16, 20 mm / ZEFP 4

Type N

Solid carbide high-feed cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide quarter round cutter
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide deburring cutters
Ø 10, 12, 16, 20 mm / ZEFP 4+6

Type N

Type N

NOF / ZEFP = Number of cutting edges

Tool holder

→ Catalogue – Clamping technology, Chapter 16 Accessories

Page No. 16|259 – 16|261

OAL 60 – 90 mm

Tapered 87° / Steel

Cylindrical* / Steel

OAL 85 – 120 mm

Tapered 87° / Steel

Cylindrical* / Steel

Tapered 87° / Solid carbide


Cylindrical* / Solid carbide

OAL 110 – 150 mm

Tapered 87° / Solid carbide

Cylindrical* / Solid carbide

OAL 150 – 200 mm

Tapered 87° / Solid carbide

Cylindrical* / Steel

Cylindrical* / Solid carbide

OAL 200 – 250 mm

Cylindrical* / Steel

Cylindrical* / Solid carbide

* only conditionally suitable for milling

14

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

PCR UNI | λ_s=36° γ_s=10° | HPC | APA72S





Factory standard

52 871 ...

DC mm	RE mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	EUR V1	
10	0,32	08	7,5	9,8	13	4	98,70	10000
12	0,32	10	9,0	11,8	16	4	113,80	12000
16	0,32	12	12,0	15,8	20	4	148,60	16000
20	0,50	16	15,0	19,8	25	4	195,00	20000

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 444+445

MultiChange – Torus Cutter

The exchangeable head system for the highest demands and a wide range of applications

W | λ_s=43° γ_s=24° | DLC | DRAGONSKIN





Factory standard

52 870 ...

DC mm	RE mm	SZID	APMX mm	DN mm	LPR mm	ZEFP	EUR V1	
10	0,5	08	7,5	9,8	13	3	87,29	10005
10	1,0	08	7,5	9,8	13	3	87,29	10010
12	0,5	10	9,0	11,8	16	3	102,30	12005
12	1,0	10	9,0	11,8	16	3	102,30	12010
12	2,0	10	9,0	11,8	16	3	102,30	12020
16	2,0	12	12,0	15,8	20	3	141,90	16020
16	4,0	12	12,0	15,8	20	3	141,90	16040
20	2,0	16	15,0	19,8	25	3	200,90	20020
20	3,0	16	15,0	19,8	25	3	200,90	20030
20	4,0	16	15,0	19,8	25	3	200,90	20040

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 452

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

PCR ALU | λ_s=41° γ_s=15° | HPC | DLC | DRAGONSKIN





Factory standard

52 872 ...

DC mm	RE mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	EUR V1	
10	0,32	08	7,5	9,8	13	4	102,40	10000
12	0,32	10	9,0	11,8	16	4	122,80	12000
16	0,32	12	12,0	15,8	20	4	162,30	16000
20	0,50	16	15,0	19,8	25	4	219,50	20000

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 444+445

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ M = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes

▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

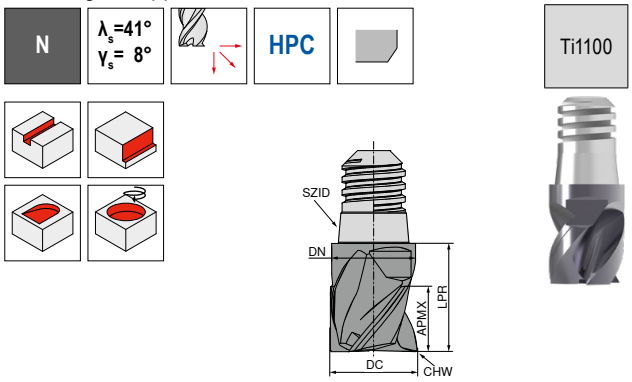

Factory standard

52 861 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	EUR V1	
8	06	6,0	7,8	11	0,16	3	61,26	080
10	08	7,5	9,8	13	0,20	3	69,63	100
12	10	9,0	11,8	16	0,24	3	87,11	120
16	12	12,0	15,8	20	0,32	3	121,80	160
20	16	15,0	19,8	25	0,40	3	156,40	200

P	●
M	
K	●
N	
S	
H	
O	

→ v_c/f_z Page 446

MultiChange – Roughing-Finishing Cutter

The exchangeable head system for the highest demands and a wide range of applications

▲ With flat cord profile

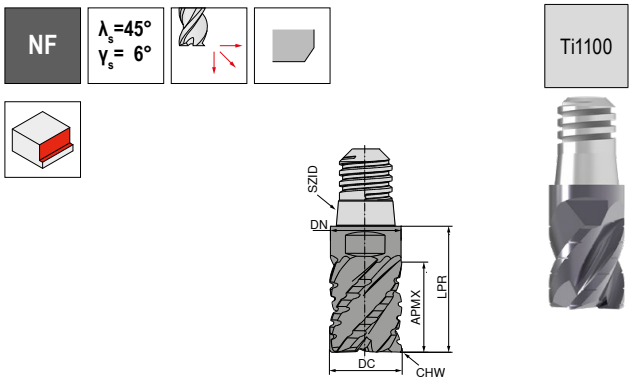

Factory standard

52 862 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	EUR V1	
8	06	10,0	7,8	15	0,16	4	76,31	080
10	08	12,5	9,8	18	0,20	4	79,42	100
12	10	15,0	11,8	22	0,24	4	108,00	120
16	12	20,0	15,8	28	0,32	5	164,80	160
20	16	25,0	19,8	35	0,40	6	221,80	200

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 447

MultiChange – End Mill

The exchangeable head system for the highest demands and a wide range of applications

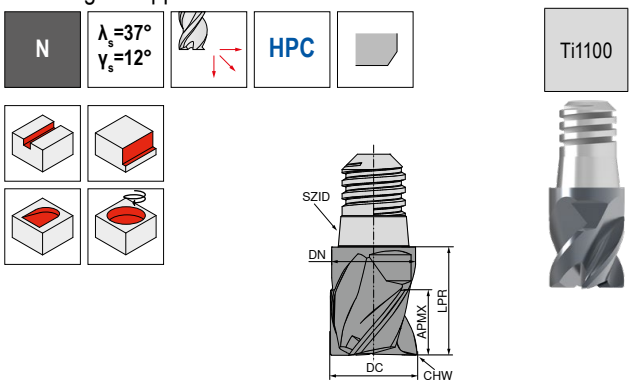

Factory standard

52 860 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	CHW mm	ZEFP	EUR V1	
8	06	6,0	7,8	11	0,16	4	66,51	080
10	08	7,5	9,8	13	0,20	4	74,61	100
12	10	9,0	11,8	16	0,24	4	94,92	120
16	12	12,0	15,8	20	0,32	4	136,10	160
20	16	15,0	19,8	25	0,40	4	176,30	200

P	●
M	
K	●
N	
S	
H	
O	

→ v_c/f_z Page 446

Assembly instructions

▲ SZID = Coupling Size
▲ SW = Across Flats Size
▲ M = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Finish milling cutter

The exchangeable head system for the highest demands and a wide range of applications





Ti1100

Factory standard

52 863 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	EUR V1	
8	06	10,0	7,8	15	6	68,06	080
10	08	12,5	9,8	18	6	76,88	100
12	10	15,0	11,8	22	6	96,35	120
16	12	20,0	15,8	28	6	150,50	160
20	16	25,0	19,8	35	6	207,60	200

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 449

MultiChange – Ball Nosed Cutter

The exchangeable head system for the highest demands and a wide range of applications





Ti1100

Factory standard

52 866 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	ZEFP	EUR V1	
10	08	7,5	9,8	13	4	77,45	100
12	10	9,0	11,8	16	4	96,49	120
16	12	12,0	15,8	20	4	144,90	160
20	16	15,0	19,8	25	4	177,70	200

P	●
M	○
K	●
N	●
S	
H	
O	○

→ v_c/f_z Page 450+451

MultiChange – Torus Cutter

The exchangeable head system for the highest demands and a wide range of applications





Ti1100

Factory standard

52 865 ...

DC mm	SZID	APMX mm	DN mm	LPR ±0,02 mm	RE mm	ZEFP	EUR V1	
8	06	6,0	7,8	11	1,0	4	61,26	081
8	06	6,0	7,8	11	2,0	4	61,26	082
10	08	7,5	9,8	13	1,5	4	69,63	101
10	08	7,5	9,8	13	3,0	4	69,63	103
12	10	9,0	11,8	16	1,5	4	87,11	121
12	10	9,0	11,8	16	4,0	4	87,11	124
16	12	12,0	15,8	20	2,0	4	129,40	162
16	12	12,0	15,8	20	5,0	4	129,40	165
20	16	15,0	19,8	25	2,0	4	174,70	202
20	16	15,0	19,8	25	6,0	4	174,70	206

P	●
M	○
K	●
N	●
S	
H	
O	○

→ v_c/f_z Page 450+451

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ M = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange –
High Feed Cutter

The exchangeable head system for the highest demands and a wide range of applications

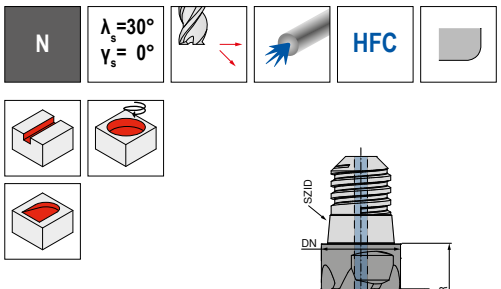



Factory standard

52 864 ...

DCX mm	SZID	r_{3D} mm	APMX mm	LPR ±0,02 mm	ZEFP	EUR V1	
8	06	0,7	6,0	11	6	66,51	**080**
10	08	0,9	7,5	13	6	74,61	**100**
12	10	1,0	9,0	16	6	94,92	**120**
16	12	1,4	12,0	20	6	136,10	**160**
20	16	1,7	15,0	25	6	176,30	**200**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 448

- ▲ r_{3D} = corner radius to be programmed
- ▲ Ø DCX tapered by 0.2 mm, resulting in Ø DN
- ▲ Ø DCX halved, resulting in Ø DC

MultiChange –
Quarter-round milling cutter

The exchangeable head system for the highest demands and a wide range of applications





Factory standard

52 869 ...

DCX mm	SZID	PRFRAD ±0,03 mm	APMX mm	DC mm	LPR ±0,02 mm	LH mm	ZEFP	EUR V1	
8	06	0,5	2,0	6,63	11	4,5	4	89,66	**080**
8	06	1,0	3,0	5,69	11	5,0	4	89,66	**081**
10	08	1,5	4,0	6,63	13	6,5	4	96,20	**100**
10	08	2,0	4,5	5,69	13	7,0	4	96,20	**101**
12	10	2,5	5,5	6,65	16	8,5	4	116,20	**120**
12	10	3,0	6,0	5,70	16	9,0	4	116,20	**121**
12	10	3,5	6,5	4,76	16	9,5	4	116,20	**122**
16	12	4,0	8,0	7,60	20	12,0	4	164,80	**160**
16	12	4,5	8,5	6,68	20	12,5	4	164,80	**161**
16	12	5,0	9,0	5,74	20	13,0	4	164,80	**162**
20	16	5,0	10,0	9,53	25	15,0	4	221,80	**200**
20	16	6,0	11,0	7,64	25	16,0	4	221,80	**201**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 453

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ M = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

MultiChange – Deburring Cutter

The exchangeable head system for the highest demands and a wide range of applications



Ti1050



Factory standard

52 867 ...

DCX mm	SZID	APMX mm	DC mm	DN mm	LPR ±0,02 mm	ZEFP	EUR V1	
10	08	7,5	0,02	9,8	13	4	62,94	**100**
12	10	9,0	0,02	11,8	16	4	81,43	**120**
16	12	12,0	6,40	15,8	20	6	108,30	**160**
20	16	15,0	8,00	19,8	25	6	143,50	**200**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 454

MultiChange – Deburring Cutter

The exchangeable head system for the highest demands and a wide range of applications



Ti1100



Factory standard

52 868 ...

DCX mm	SZID	APMX mm	DC mm	DN mm	LPR ±0,02 mm	ZEFP	EUR V1	
10	06	4,8	7,5	8	11	6	69,63	**100**
12	08	5,5	9,0	10	13	6	87,11	**120**
16	10	8,0	12,0	12	16	6	121,80	**160**
20	12	9,5	15,0	16	20	6	156,40	**200**

P	●
M	○
K	●
N	●
S	
H	
O	

→ v_c/f_z Page 454

Assembly instructions

- ▲ SZID = Coupling Size
- ▲ SW = Across Flats Size
- ▲ M = Torque moment

SZID	SW mm	M Nm
06	6	5
08	8	12,5
10	10	15
12	13	20
16	16	25

- ▲ A torque wrench should be used when mounting coupling sizes 06 and 08. It is recommended to use one for all sizes
- ▲ In unstable applications, the cutting data should be reduced.

Holders and accessories can be found in → **chapter 16, adapters and accessories in the clamping technology catalogue.**

Application Tips

APMX does not correspond to the maximum cutting depth

End milling cutter

W

λ_s=45°
γ_s=18°



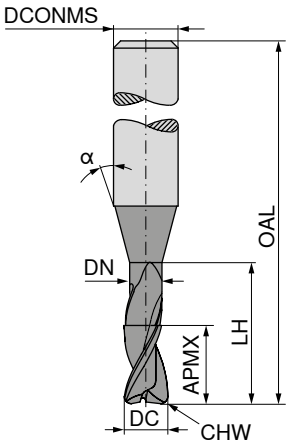

Ti1001

Factory standard

Ti1001

Factory standard

DC f8	APMX	DN	LH	OAL	α°	DCONMS h5	CHW	ZEFP	50 900 ... EUR V0/5A		50 900 ... EUR V0/5A	
mm	mm	mm	mm	mm		mm	mm					
0,2	0,2	0,18	0,6	55	15	3	0,02	2	99,08	**021**		
0,2	0,2	0,18	1,0	55	15	3	0,02	2	100,10	**022**		
0,2	0,2	0,18	1,6	55	15	3	0,02	2	101,00	**023**		
0,2	0,2	0,18	2,0	55	15	3	0,02	2	102,60	**024**		
0,3	0,3	0,28	0,9	55	15	3	0,03	2	99,08	**031**		
0,3	0,3	0,28	1,5	55	15	3	0,03	2	100,10	**032**		
0,3	0,3	0,28	2,4	55	15	3	0,03	2	101,00	**033**		
0,3	0,3	0,28	3,0	55	15	3	0,03	2	102,60	**034**		
0,4	0,4	0,37	1,2	55	15	3	0,04	2	99,08	**041**		
0,4	0,4	0,37	2,0	55	15	3	0,04	2	100,10	**042**		
0,4	0,4	0,37	3,2	55	15	3	0,04	2	101,00	**043**		
0,4	0,4	0,37	4,0	55	15	3	0,04	2	102,60	**044**		
0,5	0,5	0,45	1,5	55	15	3	0,05	2	96,93	**051**		
0,5	0,5	0,45	2,5	55	15	3	0,05	2	97,77	**052**		
0,5	0,5	0,45	4,0	55	15	3	0,05	2	99,08	**053**		
0,5	0,5	0,45	5,0	55	15	3	0,05	2	100,10	**054**		
0,6	0,6	0,58	2,0	55	15	3	0,06	2	83,42	**061**		
0,6	0,6	0,58	3,0	55	15	3	0,06	2	81,12	**062**		
0,6	0,6	0,58	5,0	65	15	3	0,06	2			88,50	**063**
0,6	0,6	0,58	6,0	65	15	3	0,06	2			93,86	**064**
0,8	0,8	0,77	2,5	55	15	3	0,08	2	81,12	**081**		
0,8	0,8	0,77	4,0	55	15	3	0,08	2	81,12	**082**		
0,8	0,8	0,77	6,5	65	15	3	0,08	2			90,24	**083**
0,8	0,8	0,77	8,0	65	15	3	0,08	2			93,86	**084**
1,0	1,0	0,95	3,0	55	15	3	0,10	2	81,12	**101**		
1,0	1,0	0,95	5,0	55	15	3	0,10	2	81,12	**102**		
1,0	1,0	0,95	8,0	65	15	3	0,10	2			85,74	**103**
1,0	1,0	0,95	10,0	65	15	3	0,10	2			93,86	**104**
1,0	1,0	0,95	12,0	65	15	3	0,10	2			96,03	**105**
1,2	1,2	1,15	3,0	55	15	3	0,10	2	81,12	**121**		
1,2	1,2	1,15	6,0	55	15	3	0,10	2	81,12	**122**		
1,2	1,2	1,15	10,0	65	15	3	0,10	2			90,24	**123**
1,2	1,2	1,15	12,0	65	15	3	0,10	2			93,86	**124**
1,3	1,3	1,25	4,0	55	15	3	0,10	2	81,12	**131**		
1,3	1,3	1,25	7,0	55	15	3	0,10	2	83,42	**132**		
1,3	1,3	1,25	11,0	65	15	3	0,10	2			90,24	**133**
1,3	1,3	1,25	13,0	65	15	3	0,10	2			96,03	**134**
1,5	1,5	1,44	5,0	55	15	3	0,10	2	83,42	**151**		
1,5	1,5	1,44	7,5	55	15	3	0,10	2	81,12	**152**		
1,5	1,5	1,44	12,0	65	15	3	0,10	2			96,03	**153**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–485

14

Continued on next page

End milling cutter



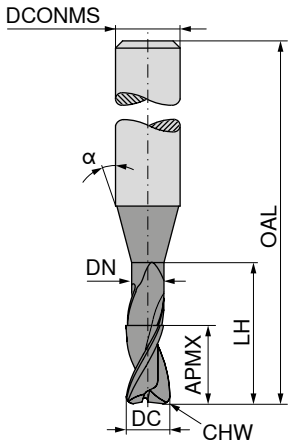

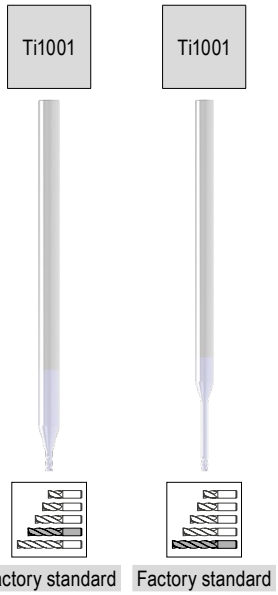

DC f8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	CHW mm	ZEFP	50 900 ... EUR V0/5A		50 900 ... EUR V0/5A	
1,5	1,5	1,44	15,0	65	15	3	0,10	2			93,86	**154**
1,6	1,6	1,52	5,0	55	15	3	0,10	2	83,42	**161**		
1,6	1,6	1,52	8,0	55	15	3	0,10	2	83,42	**162**		
1,6	1,6	1,52	13,0	65	15	3	0,10	2			90,24	**163**
1,6	1,6	1,52	16,0	65	15	3	0,10	2			96,03	**164**
1,8	1,8	1,72	5,5	55	15	3	0,10	2	81,12	**181**		
1,8	1,8	1,72	9,0	55	15	3	0,10	2	83,42	**182**		
1,8	1,8	1,72	14,5	65	15	3	0,10	2			90,24	**183**
1,8	1,8	1,72	18,0	65	15	3	0,10	2			96,03	**184**
2,0	2,0	1,92	6,0	55	15	3	0,10	2	81,12	**201**		
2,0	2,0	1,92	10,0	55	15	3	0,10	2	81,12	**202**		
2,0	2,0	1,92	14,0	55	15	3	0,10	2	85,74	**203**		
2,0	2,0	1,92	16,0	65	15	3	0,10	2			96,03	**204**
2,0	2,0	1,92	20,0	65	15	3	0,10	2			93,86	**205**
2,3	2,3	2,22	7,0	55	15	3	0,10	2	81,12	**231**		
2,3	2,3	2,22	11,5	55	15	3	0,10	2	83,42	**232**		
2,3	2,3	2,22	18,5	65	15	3	0,10	2			85,74	**233**
2,3	2,3	2,22	20,0	65	15	3	0,10	2			96,03	**234**
2,3	2,3	2,22	23,0	65	15	3	0,10	2			96,03	**235**
3,0	3,0	2,90	9,0	65	15	6	0,10	2	85,74	**301**		
3,0	3,0	2,90	15,0	65	15	6	0,10	2	96,03	**302**		
3,0	3,0	2,90	24,0	100	15	6	0,10	2			104,20	**303**
3,0	3,0	2,90	30,0	100	15	6	0,10	2			108,70	**304**
4,0	4,0	3,90	12,0	65	15	6	0,10	2	96,03	**401**		
4,0	4,0	3,90	20,0	65	15	6	0,10	2	96,03	**402**		
4,0	4,0	3,90	32,0	100	15	6	0,10	2			108,70	**403**
4,0	4,0	3,90	40,0	100	15	6	0,10	2			111,80	**404**
5,0	5,0	4,90	15,0	65	15	6	0,10	2	96,03	**501**		
5,0	5,0	4,90	25,0	65	15	6	0,10	2	96,03	**502**		
5,0	5,0	4,90	40,0	100	15	6	0,10	2			111,80	**503**
5,0	5,0	4,90	50,0	100	15	6	0,10	2			117,50	**504**
6,0	6,0	5,90	18,0	65	15	6	0,10	2	96,03	**601**		
6,0	6,0	5,90	30,0	100	15	6	0,10	2			108,70	**602**
6,0	6,0	5,90	48,0	100	15	6	0,10	2			117,50	**603**
6,0	6,0	5,90	60,0	100	15	6	0,10	2			121,10	**604**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–485

End milling cutter

W | λ_s=55° γ_s= 5° | HPC



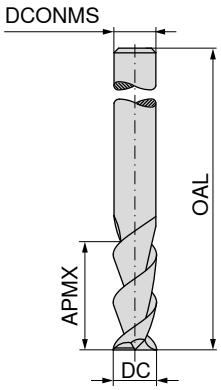

≈DIN 6527

50 960 ...

DC h6 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0/5A	
3	12	50	3	2	20,84	**030**
4	15	50	4	2	23,75	**040**
5	20	50	5	2	25,78	**050**
6	20	57	6	2	28,23	**060**
8	20	63	8	2	41,87	**080**
10	25	73	10	2	65,90	**100**
12	25	83	12	2	86,47	**120**
14	30	83	14	2	150,60	**140**
16	30	92	16	2	157,80	**160**
20	38	104	20	2	223,10	**200**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 460+461

14

End milling cutter

W | λ_s=55° γ_s= 7° | HPC



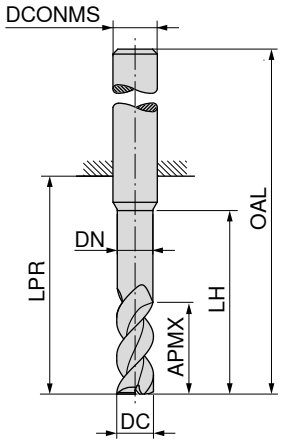

Factory standard

Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 590 ... EUR V0/5A		54 591 ... EUR V0/5A	
2,7	5,0	2,5	12	19	55	6	2	30,56	**027**	30,56	**027**
3,0	3,5	2,8	12	19	55	6	2	31,43	**033**		
3,0	5,0	2,8	12	19	55	6	2	30,56	**031**	30,56	**031**
3,7	6,5	3,5	12	19	55	6	2	30,56	**037**	30,56	**037**
4,0	4,5	3,8	12	19	55	6	2	31,43	**043**		
4,0	6,5	3,8	12	19	55	6	2	30,56	**041**	30,56	**041**
4,7	8,0	4,5	15	22	58	6	2	30,56	**047**	30,56	**047**
5,0	5,5	4,8	15	22	58	6	2	31,43	**053**		
5,0	8,0	4,8	15	22	58	6	2	30,56	**051**	30,56	**051**
5,7	10,0	5,5	18	22	58	6	2	30,56	**057**	30,56	**057**
6,0	7,0	5,8	18	22	58	6	2	31,43	**063**		
6,0	10,0	5,8	18	22	58	6	2	30,56	**061**	30,56	**061**
6,7	13,0	6,4	24	28	64	8	2	44,91	**067**	44,91	**067**
7,0	13,0	6,7	24	28	64	8	2	44,91	**071**	44,91	**071**
7,7	13,0	7,4	24	28	64	8	2	44,91	**077**	44,91	**077**
8,0	9,0	7,7	24	28	64	8	2	44,91	**083**		
8,0	13,0	7,7	24	28	64	8	2	44,91	**081**	44,91	**081**
8,7	16,0	8,4	30	34	74	10	2	70,98	**087**	70,98	**087**
9,0	16,0	8,7	30	34	74	10	2	70,98	**091**	70,98	**091**
9,7	16,0	9,4	30	34	74	10	2	70,98	**097**	70,98	**097**
10,0	11,0	9,7	30	34	74	10	2	70,98	**103**		
10,0	16,0	9,7	30	34	74	10	2	70,98	**101**	70,98	**101**
10,7	19,0	10,3	36	40	85	12	2	94,16	**107**	94,16	**107**
11,0	19,0	10,6	36	40	85	12	2	94,16	**111**	94,16	**111**
11,7	19,0	11,3	36	40	85	12	2	94,16	**117**	94,16	**117**
12,0	13,0	11,6	36	40	85	12	2	94,16	**123**		
12,0	19,0	11,6	36	40	85	12	2	94,16	**121**	94,16	**121**
13,0	22,0	12,6	42	46	91	14	2	137,20	**131**	137,20	**131**
13,7	22,0	13,3	42	46	91	14	2	137,20	**137**	137,20	**137**
14,0	15,0	13,6	42	46	91	14	2	137,20	**143**		
14,0	22,0	13,6	42	46	91	14	2	137,20	**141**	137,20	**141**
15,0	25,0	14,5	48	52	100	16	2	221,60	**151**	221,60	**151**
15,7	25,0	15,2	48	52	100	16	2	221,60	**157**	221,60	**157**
16,0	17,0	15,5	48	52	100	16	2	221,60	**163**		
16,0	25,0	15,5	48	52	100	16	2	221,60	**161**	221,60	**161**
18,0	20,0	17,5	54	58	106	18	2	283,90	**183**		
18,0	29,0	17,5	54	58	106	18	2	285,40	**181**	285,40	**181**
19,7	32,0	19,2	60	64	114	20	2	311,60	**197**	311,60	**197**
20,0	22,0	19,5	60	64	114	20	2	299,80	**203**		
20,0	32,0	19,5	60	64	114	20	2	311,60	**201**	311,60	**201**
24,7	40,0	24,2	75	80	136	25	2	479,40	**247**	479,40	**247**
25,0	27,0	24,5	75	80	136	25	2	453,60	**253**		
25,0	40,0	24,5	75	80	136	25	2	479,40	**251**	479,40	**251**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=55° γ_s= 7° | HPC



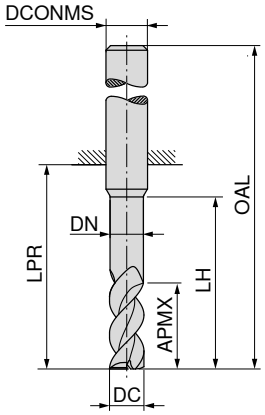

LPR with Shank DIN 6535 HB

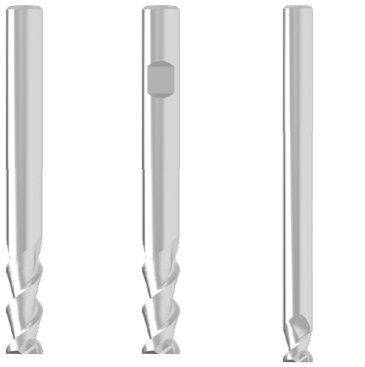



Factory standard | Factory standard | Factory standard



DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 590 ... EUR V0/5A		54 591 ... EUR V0/5A		54 590 ... EUR V0/5A	
2,7	8,0	2,5	15	22	58	6	2	35,50	**028**	35,50	**028**		
3,0	3,5	2,8	15	22	58	6	2	33,61	**034**				
3,0	8,0	2,8	15	22	58	6	2	35,50	**032**	35,50	**032**		
3,0	3,5	2,8	24	31	67	6	2					42,00	**035**
3,7	10,5	3,5	20	26	62	6	2	35,50	**038**	35,50	**038**		
4,0	4,5	3,8	20	26	62	6	2	33,61	**044**				
4,0	10,5	3,8	20	26	62	6	2	35,50	**042**	35,50	**042**		
4,0	4,5	3,8	32	38	74	6	2					42,00	**045**
4,7	13,0	4,5	25	34	70	6	2	35,50	**048**	35,50	**048**		
5,0	5,5	4,8	25	34	70	6	2	33,61	**054**				
5,0	13,0	4,8	25	34	70	6	2	35,50	**052**	35,50	**052**		
5,0	5,5	4,8	40	52	88	6	2					43,02	**055**
5,7	16,0	5,5	30	34	70	6	2	35,50	**058**	35,50	**058**		
6,0	7,0	5,8	30	34	70	6	2	33,61	**064**				
6,0	16,0	5,8	30	34	70	6	2	35,50	**062**	35,50	**062**		
6,0	7,0	5,8	48	52	88	6	2					43,02	**065**
6,7	21,0	6,4	40	44	80	8	2	50,84	**068**	50,84	**068**		
7,0	21,0	6,7	40	44	80	8	2	50,84	**072**	50,84	**072**		
7,7	21,0	7,4	40	44	80	8	2	50,84	**078**	50,84	**078**		
8,0	9,0	7,7	40	44	80	8	2	49,40	**084**				
8,0	21,0	7,7	40	44	80	8	2	50,84	**082**	50,84	**082**		
8,0	9,0	7,7	64	68	104	8	2					63,75	**085**
8,7	26,0	8,4	50	54	94	10	2	80,24	**088**	80,24	**088**		
9,0	26,0	8,7	50	54	94	10	2	80,24	**092**	80,24	**092**		
9,7	26,0	9,4	50	54	94	10	2	80,24	**098**	80,24	**098**		
10,0	11,0	9,7	50	54	94	10	2	78,07	**104**				
10,0	26,0	9,7	50	54	94	10	2	80,24	**102**	80,24	**102**		
10,0	11,0	9,7	80	84	124	10	2					129,90	**105**
10,7	31,0	10,3	60	64	109	12	2	132,10	**108**	132,10	**108**		
11,0	31,0	10,6	60	64	109	12	2	132,10	**112**	132,10	**112**		
11,7	31,0	11,3	60	64	109	12	2	132,10	**118**	132,10	**118**		
12,0	13,0	11,6	60	64	109	12	2	129,70	**124**				
12,0	31,0	11,6	60	64	109	12	2	132,10	**122**	132,10	**122**		
12,0	13,0	11,6	96	100	145	12	2					170,90	**125**
13,0	36,0	12,6	70	74	119	14	2	191,30	**132**	191,30	**132**		
13,7	36,0	13,3	70	74	119	14	2	191,30	**138**	191,30	**138**		
14,0	15,0	13,6	70	74	119	14	2	189,80	**144**				
14,0	36,0	13,6	70	74	119	14	2	191,30	**142**	191,30	**142**		
14,0	15,0	13,6	112	116	161	14	2					253,30	**145**
15,0	41,0	14,5	80	84	132	16	2	249,20	**152**	249,20	**152**		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 460+461

Continued on next page

End milling cutter

W | λ_s=55° γ_s= 7° | HPC



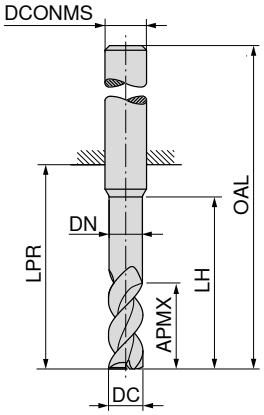

LPR with Shank DIN 6535 HB

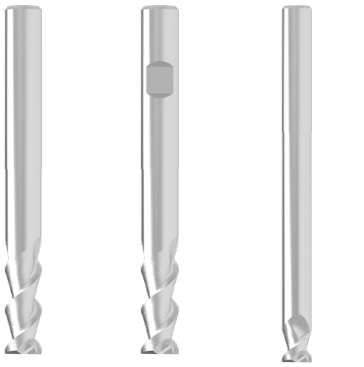



Factory standard | Factory standard | Factory standard



DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 590 ... EUR V0/5A		54 591 ... EUR V0/5A		54 590 ... EUR V0/5A	
15,7	41,0	15,2	80	84	132	16	2	249,20	**158**	249,20	**158**		
16,0	17,0	15,5	80	84	132	16	2	246,20	**164**				
16,0	41,0	15,5	80	84	132	16	2	249,20	**162**	249,20	**162**		
16,0	17,0	15,5	128	132	180	16	2					328,80	**165**
18,0	20,0	17,5	90	94	142	18	2	310,10	**184**				
18,0	47,0	17,5	90	94	142	18	2	324,60	**182**	324,60	**182**		
18,0	20,0	17,5	144	148	196	18	2					418,70	**185**
19,7	52,0	19,2	100	104	154	20	2	355,00	**198**	355,00	**198**		
20,0	22,0	19,5	100	104	154	20	2	330,30	**204**				
20,0	52,0	19,5	100	104	154	20	2	355,00	**202**	355,00	**202**		
20,0	22,0	19,5	160	164	214	20	2					456,40	**205**
P													
M													
K													
N									●		●		●
S													
H													
O													

→ v_c/f_z Page 460+461

End milling cutter with corner radius

W | λ_s=55° γ_s= 7° | HPC



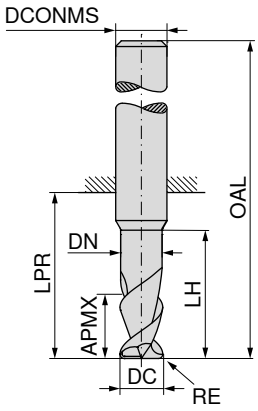



Factory standard | Factory standard

DC h6 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 594 ... EUR V0/5A		54 595 ... EUR V0/5A	
3	0,2	5,0	2,8	12	19	55	6	2	34,78	031	34,78	031
3	0,3	5,0	2,8	12	19	55	6	2	34,78	033	34,78	033
3	0,5	5,0	2,8	12	19	55	6	2	34,78	035	34,78	035
4	0,3	6,5	3,8	12	19	55	6	2	34,78	041	34,78	041
4	0,5	6,5	3,8	12	19	55	6	2	34,78	043	34,78	043
4	1,0	6,5	3,8	12	19	55	6	2	34,78	045	34,78	045
5	0,3	8,0	4,8	15	22	58	6	2	35,50	051	35,50	051
5	0,5	8,0	4,8	15	22	58	6	2	35,50	053	35,50	053
5	1,0	8,0	4,8	15	22	58	6	2	35,50	055	35,50	055
6	0,3	10,0	5,8	18	22	58	6	2	36,07	061	36,07	061
6	0,5	10,0	5,8	18	22	58	6	2	36,07	063	36,07	063
6	1,0	10,0	5,8	18	22	58	6	2	36,07	065	36,07	065
8	0,3	13,0	7,7	24	28	64	8	2	49,68	081	49,68	081
8	0,5	13,0	7,7	24	28	64	8	2	49,68	083	49,68	083
8	1,0	13,0	7,7	24	28	64	8	2	49,68	085	49,68	085
10	0,3	16,0	9,7	30	34	74	10	2	75,47	101	75,47	101
10	1,0	16,0	9,7	30	34	74	10	2	75,47	103	75,47	103
10	1,5	16,0	9,7	30	34	74	10	2	75,47	105	75,47	105
12	1,0	19,0	11,6	36	40	85	12	2	99,08	121	99,08	121
12	1,5	19,0	11,6	36	40	85	12	2	99,08	123	99,08	123
12	2,0	19,0	11,6	36	40	85	12	2	99,08	125	99,08	125
16	2,0	25,0	15,5	48	52	100	16	2	230,30	161	230,30	161
16	2,5	25,0	15,5	48	52	100	16	2	231,70	163	231,70	163
16	3,0	25,0	15,5	48	52	100	16	2	231,70	165	231,70	165
20	2,0	32,0	19,5	60	64	114	20	2	314,30	201	314,30	201
20	2,5	32,0	19,5	60	64	114	20	2	314,30	203	314,30	203
20	3,0	32,0	19,5	60	64	114	20	2	314,30	205	314,30	205
20	4,0	32,0	19,5	60	64	114	20	2	314,30	206	314,30	206
25	2,0	40,0	24,5	75	80	136	25	2	482,40	251	482,40	251
25	4,0	40,0	24,5	75	80	136	25	2	483,90	253	483,90	253

P		
M		
K		
N	●	●
S		
H		
O		

14

→ v_c/f_z Page 460+461

End milling cutter with corner radius

W | λ_s=55° γ_s= 7° | HPC



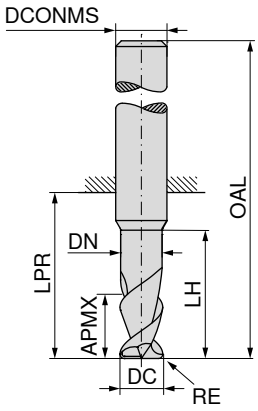

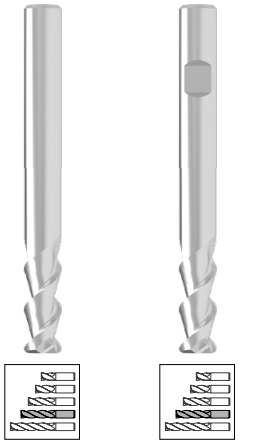

Factory standard | Factory standard

DC h6 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 594 ... EUR V0/5A		54 595 ... EUR V0/5A	
3	0,2	8,0	2,8	15	22	58	6	2	34,78	032	34,78	032
3	0,3	8,0	2,8	15	22	58	6	2	34,78	034	34,78	034
3	0,5	8,0	2,8	15	22	58	6	2	34,78	036	34,78	036
4	0,3	10,5	3,8	20	26	62	6	2	36,62	042	36,62	042
4	0,5	10,5	3,8	20	26	62	6	2	36,62	044	36,62	044
4	1,0	10,5	3,8	20	26	62	6	2	36,62	046	36,62	046
5	0,3	13,0	4,8	25	34	70	6	2	39,69	052	39,69	052
5	0,5	13,0	4,8	25	34	70	6	2	39,69	054	39,69	054
5	1,0	13,0	4,8	25	34	70	6	2	39,69	056	39,69	056
6	0,3	16,0	5,8	30	34	70	6	2	39,69	062	39,69	062
6	0,5	16,0	5,8	30	34	70	6	2	39,69	064	39,69	064
6	1,0	16,0	5,8	30	34	70	6	2	39,69	066	39,69	066
8	0,3	21,0	7,7	40	44	80	8	2	55,35	082	55,35	082
8	0,5	21,0	7,7	40	44	80	8	2	55,35	084	55,35	084
8	1,0	21,0	7,7	40	44	80	8	2	55,35	086	55,35	086
10	0,5	26,0	9,7	50	54	94	10	2	84,72	102	84,72	102
10	1,0	26,0	9,7	50	54	94	10	2	84,72	104	84,72	104
10	1,5	26,0	9,7	50	54	94	10	2	84,72	106	84,72	106
12	1,0	31,0	11,6	60	64	109	12	2	138,40	122	138,40	122
12	1,5	31,0	11,6	60	64	109	12	2	138,40	124	138,40	124
12	2,0	31,0	11,6	60	64	109	12	2	138,40	126	138,40	126
16	2,0	41,0	15,5	80	84	132	16	2	260,60	162	260,60	162
16	2,5	41,0	15,5	80	84	132	16	2	262,20	164	262,20	164
16	4,0	41,0	15,5	80	84	132	16	2	262,20	166	262,20	166
20	2,0	52,0	19,5	100	104	154	20	2	360,80	202	360,80	202
20	2,5	52,0	19,5	100	104	154	20	2	362,30	204	362,30	204
20	4,0	52,0	19,5	100	104	154	20	2	362,30	207	362,30	207
25	2,0	65,0	24,5	125	130	186	25	2	673,50	252	673,50	252
25	4,0	65,0	24,5	125	130	186	25	2	673,50	254	673,50	254

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 460+461

Slot milling cutter



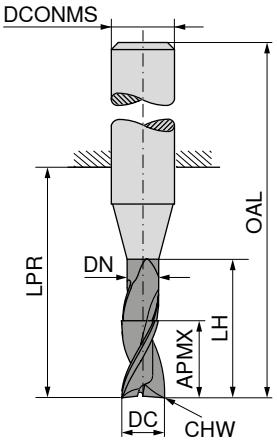



Factory standard

52 762 ...

DC mm	DC Tol.	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	CHW mm	ZEFP	EUR V1	
2	h10	8	1,8	31	32	60	2	0,04	2	159,50	**020**
3	h10	12	2,8	41	42	70	3	0,07	2	170,90	**030**
4	h10	15	3,8	51	52	80	4	0,07	2	211,70	**040**
5	h10	20	4,8	71	72	100	5	0,12	2	249,20	**050**
6	h10	20	5,8	63	64	100	6	0,12	2	273,80	**060**
8	h10	20	7,8	83	84	120	8	0,12	2	385,40	**080**
10	h10	25	9,8	99	100	140	10	0,20	2	495,40	**100**
12	h10	25	11,8	104	105	150	12	0,20	2	649,00	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



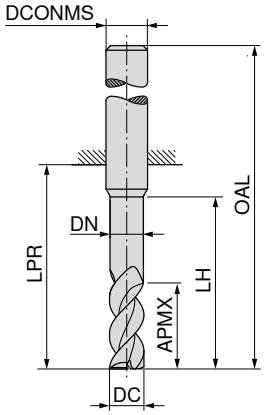

LPR with Shank DIN 6535 HB

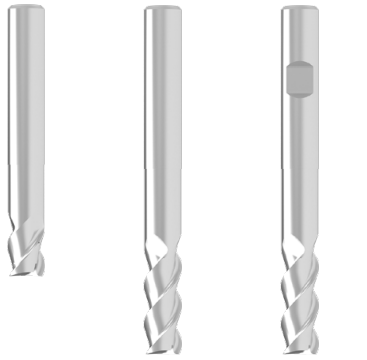



Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 610 ... EUR V0/5A		54 610 ... EUR V0/5A		54 611 ... EUR V0/5A	
3	3,5	2,8	12	19	55	6	3	33,03	033				
3	3,5	2,8	15	22	58	6	3			36,07	034		
3	8,0	2,8	15	22	58	6	3			36,07	032	36,07	032
4	4,5	3,8	12	19	55	6	3	33,03	043				
4	4,5	3,8	20	26	62	6	3			36,07	044		
4	10,5	3,8	20	26	62	6	3			38,25	042	38,25	042
5	5,5	4,8	15	22	58	6	3	33,03	053				
5	5,5	4,8	25	34	70	6	3			36,07	054		
5	13,0	4,8	25	34	70	6	3			38,25	052	38,25	052
6	7,0	5,8	18	22	58	6	3	33,03	063				
6	7,0	5,8	30	34	70	6	3			36,07	064		
6	16,0	5,8	30	34	70	6	3			38,25	062	38,25	062
7	21,0	6,7	40	44	80	8	3			54,45	072	54,45	072
8	9,0	7,7	24	28	64	8	3	47,37	083				
8	9,0	7,7	40	44	80	8	3			51,73	084		
8	21,0	7,7	40	44	80	8	3			54,45	082	54,45	082
9	26,0	8,7	50	54	94	10	3			85,74	092	85,74	092
10	11,0	9,7	30	34	74	10	3	73,59	103				
10	11,0	9,7	50	54	94	10	3			80,55	104		
10	26,0	9,7	50	54	94	10	3			85,74	102	85,74	102
11	31,0	10,6	60	64	109	12	3			142,40	112	142,40	112
12	13,0	11,6	36	40	85	12	3	96,77	123				
12	13,0	11,6	60	64	109	12	3			149,30	124		
12	31,0	11,6	60	64	109	12	3			142,40	122	142,40	122
13	36,0	12,6	70	74	119	14	3			207,20	132	207,20	132
14	15,0	13,6	42	46	91	14	3	139,90	143				
14	15,0	13,6	70	74	119	14	3			215,80	144		
14	36,0	13,6	70	74	119	14	3			207,20	142	207,20	142
15	17,0	14,5	48	52	100	16	3	181,10	153				
15	17,0	14,5	80	84	132	16	3			281,00	154		
15	41,0	14,5	80	84	132	16	3			267,90	152	267,90	152
16	17,0	15,5	48	52	100	16	3	181,10	163				
16	17,0	15,5	80	84	132	16	3			281,00	164		
16	41,0	15,5	80	84	132	16	3			267,90	162	267,90	162
18	20,0	17,5	54	58	106	18	3	228,80	183				
18	20,0	17,5	90	94	142	18	3			350,60	184		
18	47,0	17,5	90	94	142	18	3			339,00	182	339,00	182
20	22,0	19,5	60	64	114	20	3	339,00	203				
20	22,0	19,5	100	104	154	20	3			372,40	204		
20	52,0	19,5	100	104	154	20	3			362,30	202	362,30	202
25	27,0	24,5	75	80	136	25	3	618,50	253				
25	27,0	24,5	125	130	186	25	3			724,40	254		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



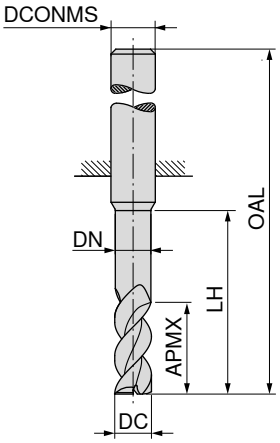

Factory standard

54 610 ...

DC h6 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V0/5A	
3	3,5	2,8	24	67	6	3	44,64	**035**
4	4,5	3,8	32	74	6	3	44,64	**045**
5	5,5	4,8	40	88	6	3	44,64	**055**
6	7,0	5,8	48	88	6	3	44,64	**065**
8	9,0	7,7	64	104	8	3	65,03	**085**
10	11,0	9,7	80	124	10	3	147,70	**105**
12	13,0	11,6	96	145	12	3	197,00	**125**
14	15,0	13,6	112	161	14	3	286,90	**145**
16	17,0	15,5	128	180	16	3	370,90	**165**
18	20,0	17,5	144	196	18	3	470,90	**185**
20	22,0	19,5	160	214	20	3	515,70	**205**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 460+461

End milling cutter with corner radius

W | λ_s=45° γ_s= 7° | HPC



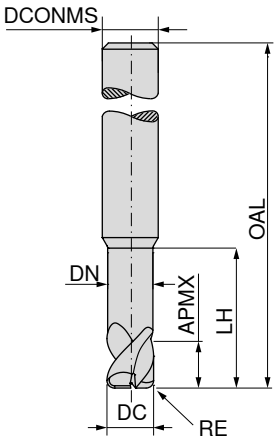

Factory standard

54 620 ...

DC h6 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V0/5A	
3	0,4	3,5	2,8	12	55	6	3	37,09	**034**
3	0,6	3,5	2,8	12	55	6	3	37,09	**035**
4	0,4	4,5	3,8	12	55	6	3	37,09	**044**
4	0,6	4,5	3,8	12	55	6	3	37,09	**046**
5	0,4	5,5	4,8	15	58	6	3	37,09	**054**
5	0,6	5,5	4,8	15	58	6	3	37,09	**056**
6	0,4	7,0	5,8	18	58	6	3	37,09	**064**
6	0,6	7,0	5,8	18	58	6	3	37,09	**066**
8	0,4	9,0	7,7	24	64	8	3	51,27	**084**
8	0,6	9,0	7,7	24	64	8	3	51,27	**086**
8	0,8	9,0	7,7	24	64	8	3	51,27	**087**
10	1,6	11,0	9,7	30	74	10	3	77,64	**103**
12	2,0	13,0	11,6	36	85	12	3	100,50	**124**
14	0,6	15,0	13,6	42	91	14	3	143,70	**146**
14	0,8	15,0	13,6	42	91	14	3	143,70	**147**
16	1,6	17,0	15,5	48	100	16	3	187,00	**163**
16	3,2	17,0	15,5	48	100	16	3	188,40	**167**
18	1,6	20,0	17,5	54	106	18	3	231,70	**183**
20	3,2	22,0	19,5	60	114	20	3	349,10	**207**
20	5,0	22,0	19,5	60	114	20	3	349,10	**209**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



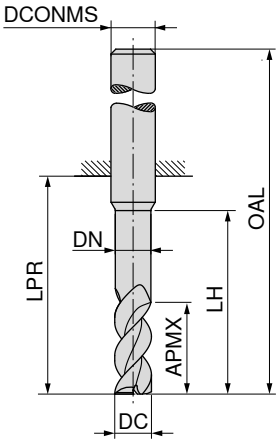

	Factory standard	Factory standard
	54 630 ...	**54 631 ...**

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V0/5A		EUR V0/5A	
6	10	5,8	18	22	58	6	4	34,78	**061**	34,78	**061**
7	13	6,7	24	28	64	8	4	49,40	**071**	49,40	**071**
8	13	7,7	24	28	64	8	4	49,40	**081**	49,40	**081**
9	16	8,7	30	34	74	10	4	76,92	**091**	76,92	**091**
10	16	9,7	30	34	74	10	4	76,92	**101**	76,92	**101**
11	19	10,6	36	40	85	12	4	100,50	**111**	100,50	**111**
12	19	11,6	36	40	85	12	4	100,50	**121**	100,50	**121**
13	22	12,6	42	46	91	14	4	144,60	**131**	144,60	**131**
14	22	13,6	42	46	91	14	4	144,60	**141**	144,60	**141**
15	25	14,5	48	52	100	16	4	188,40	**151**	188,40	**151**
16	25	15,5	48	52	100	16	4	188,40	**161**	188,40	**161**
18	29	17,5	54	58	106	18	4	236,10	**181**	236,10	**181**
20	32	19,5	60	64	114	20	4	267,90	**201**	267,90	**201**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=45° γ_s= 7° | HPC



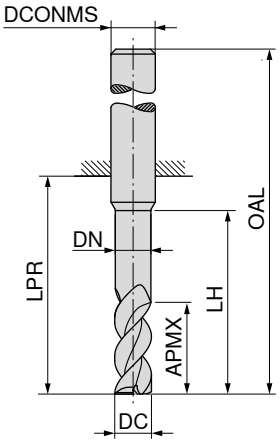

Factory standard

Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	54 630 ... EUR V0/5A		54 631 ... EUR V0/5A	
6	16	5,8	30	34	70	6	4	36,80	**062**	36,80	**062**
7	21	6,7	40	44	80	8	4	54,45	**072**	54,45	**072**
8	21	7,7	40	44	80	8	4	54,45	**082**	54,45	**082**
9	26	8,7	50	54	94	10	4	85,74	**092**	85,74	**092**
10	26	9,7	50	54	94	10	4	85,74	**102**	85,74	**102**
11	31	10,6	60	64	109	12	4	142,40	**112**	142,40	**112**
12	31	11,6	60	64	109	12	4	142,40	**122**	142,40	**122**
13	36	12,6	70	74	119	14	4	207,20	**132**	207,20	**132**
14	36	13,6	70	74	119	14	4	207,20	**142**	207,20	**142**
15	41	14,5	80	84	132	16	4	267,90	**152**	267,90	**152**
16	41	15,5	80	84	132	16	4	267,90	**162**	267,90	**162**
18	47	17,5	90	94	142	18	4	339,00	**182**	339,00	**182**
20	52	19,5	100	104	154	20	4	362,30	**202**	362,30	**202**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 460+461

End milling cutter

W | λ_s=38° γ_s=17° | HPC

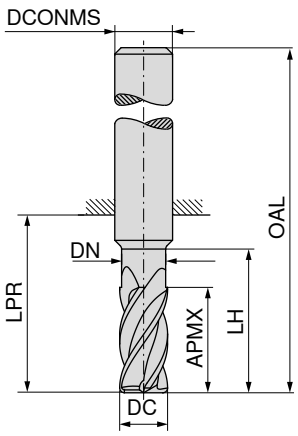

Factory standard

54 650 ...

DC h6 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	EUR V0/5A	
6	19	5,8	30	34	70	6	5	84,33	**062**
8	25	7,7	40	44	80	8	5	108,50	**082**
10	31	9,7	50	54	94	10	5	168,00	**102**
12	37	11,6	60	64	109	12	5	267,90	**122**
14	43	13,6	70	74	119	14	5	436,10	**142**
16	49	15,5	80	84	132	16	7	485,40	**162**
18	56	17,5	90	94	142	18	7	605,40	**182**
20	62	19,5	100	104	154	20	7	672,20	**202**

P	
M	
K	
N	●
S	
H	
O	

→ v_c/f_z Page 460+461

End milling cutter



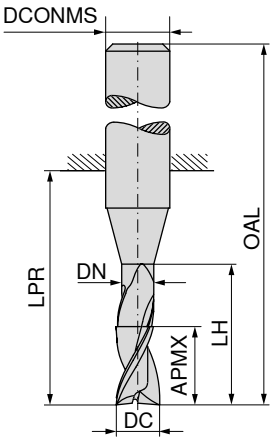

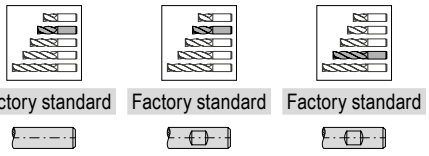

Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 942 ... EUR V1/5B		52 941 ... EUR V1/5B		52 948 ... EUR V1/5B	
0,20	0,4			10	38	3	2	67,92	**92000**				
0,25	0,5			10	38	3	2	60,25	**92500**				
0,30	1,0			10	38	3	2	38,97	**93000**				
0,35	1,0			10	38	3	2	38,97	**93500**				
0,40	1,0			10	38	3	2	31,43	**94000**				
0,50	1,5			10	38	3	2	28,23	**95000**				
0,60	1,5			10	38	3	2	28,23	**96000**				
0,70	2,0			10	38	3	2	28,23	**97000**				
0,80	2,0			10	38	3	2	28,23	**98000**				
0,90	2,5			10	38	3	2	28,23	**99000**				
1,00	3,0			10	38	3	2	28,23	**31000**				
1,00	4,0	0,90	6	22	58	6	2					41,43	**01000**
1,10	3,0			10	38	3	2	28,23	**31100**				
1,20	4,0			10	38	3	2	28,23	**31200**				
1,30	4,0			10	38	3	2	29,69	**31300**				
1,40	4,0			10	38	3	2	29,69	**31400**				
1,50	3,0	1,40	6	18	54	6	2	38,97	**01500**	38,97	**01500**		
1,50	4,0			10	38	3	2	29,69	**31500**				
1,50	6,0	1,40	8	22	58	6	2					41,43	**01500**
1,60	4,0			10	38	3	2	31,56	**31600**				
1,80	5,0			10	38	3	2	31,56	**31800**				
2,00	4,0	1,90	8	18	54	6	2	37,36	**02000**	37,36	**02000**		
2,00	7,0	1,90	10	22	58	6	2					41,43	**02000**
2,50	4,0	2,40	8	18	54	6	2			37,36	**02500**		
2,50	6,0			10	38	3	2	29,69	**32500**				
2,80	4,0	2,70	9	18	54	6	2	43,02	**02800**	43,02	**02800**		
2,80	7,0	2,70	12	22	58	6	2					44,64	**02800**
3,00	6,0	2,90	9	18	54	6	2	37,36	**03000**	37,36	**03000**		
3,00	10,0	2,90	14	22	58	6	2					41,43	**03000**
3,50	6,0	3,30	9	18	54	6	2			37,36	**03500**		
3,80	7,0	3,60	12	18	54	6	2	43,02	**03800**	43,02	**03800**		
3,80	10,0	3,60	18	22	58	6	2					44,64	**03800**
4,00	7,0	3,80	12	18	54	6	2	37,09	**04000**	37,09	**04000**		
4,00	13,0	3,80	18	22	58	6	2					41,43	**04000**
4,50	7,0	4,30	12	18	54	6	2			37,36	**04500**		
4,80	8,0	4,60	16	18	54	6	2	43,02	**04800**	43,02	**04800**		
4,80	13,0	4,60	18	22	58	6	2					44,64	**04800**
5,00	8,0	4,80	16	18	54	6	2	37,09	**05000**	37,09	**05000**		
5,00	15,0	4,80	18	22	58	6	2					41,43	**05000**
5,50	8,0	5,30	16	18	54	6	2			37,36	**05500**		
5,75	10,0	5,55	16	18	54	6	2	43,02	**05700**	43,02	**05700**		

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter



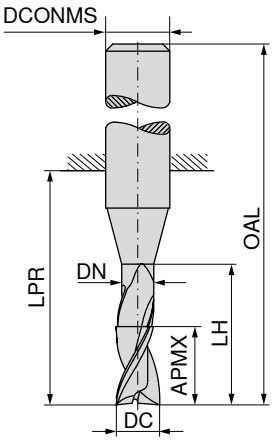

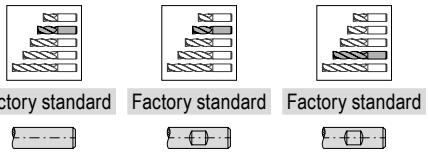

Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 942 ... EUR V1/5B		52 941 ... EUR V1/5B		52 948 ... EUR V1/5B	
5,75	15,0	5,55	18	22	58	6	2					45,77	**05700**
6,00	10,0	5,80	16	18	54	6	2	37,09	**06000**	37,09	**06000**		
6,00	16,0	5,80	20	22	58	6	2					41,43	**06000**
6,75	10,0	6,45	16	23	59	8	2	49,68	**06700**	49,68	**06700**		
6,75	16,0	6,45	23	34	70	8	2					55,64	**06700**
7,00	12,0	6,70	18	23	59	8	2			48,09	**07000**		
7,00	16,0	6,70	23	34	70	8	2					48,83	**07000**
7,75	12,0	7,45	18	23	59	8	2	47,93	**07700**	47,93	**07700**		
7,75	16,0	7,45	23	34	70	8	2					52,14	**07700**
8,00	12,0	7,70	20	23	59	8	2	41,43	**08000**	41,43	**08000**		
8,00	22,0	7,70	25	34	70	8	2					47,83	**08000**
8,70	12,0	8,40	12	27	67	10	2	79,67	**08700**	79,67	**08700**		
9,70	13,0	9,40	13	27	67	10	2	77,06	**09700**	77,06	**09700**		
9,70	22,0	9,40	22	33	73	10	2					88,63	**09700**
10,00	13,0	9,70	13	27	67	10	2	65,34	**10000**	65,34	**10000**		
10,00	25,0	9,70	25	33	73	10	2					83,74	**10000**
11,00	25,0	10,60	25	39	84	12	2					118,00	**11000**
12,00	16,0	11,60	16	28	73	12	2	91,13	**12000**	91,13	**12000**		
12,00	26,0	11,60	26	39	84	12	2					112,40	**12000**
13,70	16,0	13,30	26	30	75	14	2	149,30	**13700**	149,30	**13700**		
13,70	26,0	13,30	35	39	84	14	2					157,80	**13700**
14,00	16,0	13,60	28	30	75	14	2	125,90	**14000**	125,90	**14000**		
14,00	26,0	13,60	35	39	84	14	2					146,30	**14000**
16,00	20,0	15,50	32	35	83	16	2	136,90	**16000**	136,90	**16000**		
16,00	30,0	15,50	40	45	93	16	2					175,30	**16000**
20,00	25,0	19,50	40	43	93	20	2	231,70	**20000**	231,70	**20000**		
20,00	40,0	19,50	50	54	104	20	2					285,40	**20000**

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–483

End milling cutter



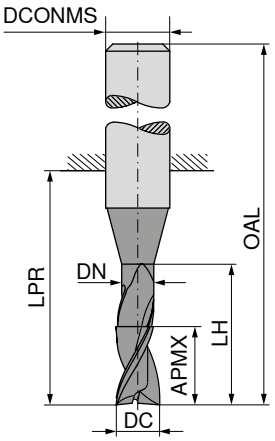

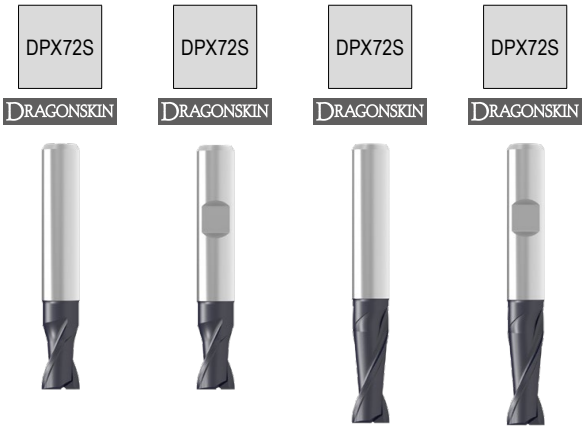

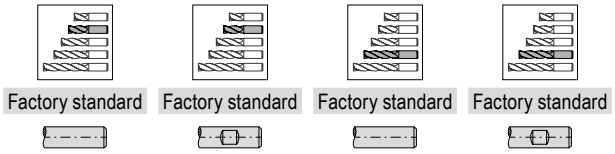

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 943 ... EUR V1/5B		52 944 ... EUR V1/5B		52 947 ... EUR V1/5B		52 949 ... EUR V1/5B	
0,20	0,4			10	38	3	2	75,92	**92000**						
0,25	0,5			10	38	3	2	75,92	**92500**						
0,30	1,0			10	38	3	2	51,57	**93000**						
0,35	1,0			10	38	3	2	51,57	**93500**						
0,40	1,0			10	38	3	2	42,87	**94000**						
0,50	1,5			10	38	3	2	39,41	**95000**						
0,60	1,5			10	38	3	2	39,41	**96000**						
0,70	2,0			10	38	3	2	39,41	**97000**						
0,80	2,0			10	38	3	2	39,41	**98000**						
0,90	2,5			10	38	3	2	39,41	**99000**						
1,00	3,0			10	38	3	2	39,41	**31000**						
1,00	4,0	0,90	6	22	58	6	2					57,95	**01000**	57,95	**01000**
1,10	3,0			10	38	3	2	39,41	**31100**						
1,20	4,0			10	38	3	2	39,41	**31200**						
1,30	4,0			10	38	3	2	39,41	**31300**						
1,40	4,0			10	38	3	2	40,86	**31400**						
1,50	4,0			10	38	3	2	40,86	**31500**						
1,50	6,0	1,40	8	22	58	6	2					57,95	**01500**	57,95	**01500**
1,50	3,0	1,40	6	18	54	6	2	47,52	**01500**	47,52	**01500**				
1,60	4,0			10	38	3	2	43,02	**31600**						
1,80	5,0			10	38	3	2	43,02	**31800**						
2,00	4,0	1,90	8	18	54	6	2	52,58	**02000**	52,58	**02000**				
2,00	7,0	1,90	10	22	58	6	2					57,95	**02000**	57,95	**02000**
2,00	5,0			10	38	3	2	43,02	**32000**						
2,50	4,0	2,40	8	18	54	6	2	52,58	**02500**	52,58	**02500**				
2,50	6,0			10	38	3	2	45,49	**32500**						
2,80	4,0	2,70	9	18	54	6	2	59,54	**02800**	59,54	**02800**				
2,80	7,0	2,70	12	22	58	6	2					60,42	**02800**	60,42	**02800**
3,00	6,0	2,90	9	18	54	6	2	52,58	**03000**	52,58	**03000**				
3,00	10,0	2,90	14	22	58	6	2					57,95	**03000**	57,95	**03000**
3,00	6,0			10	38	3	2	45,49	**33000**						
3,50	6,0	3,30	9	18	54	6	2	56,62	**03500**	56,62	**03500**				
3,80	7,0	3,60	12	18	54	6	2	59,54	**03800**	59,54	**03800**				
3,80	10,0	3,60	18	22	58	6	2					60,42	**03800**	60,42	**03800**
4,00	7,0	3,80	12	18	54	6	2	52,58	**04000**	52,58	**04000**				
4,00	13,0	3,80	18	22	58	6	2					57,95	**04000**	57,95	**04000**
4,50	7,0	4,30	12	18	54	6	2	56,62	**04500**	56,62	**04500**				
4,80	8,0	4,60	16	18	54	6	2	59,54	**04800**	59,54	**04800**				
4,80	13,0	4,60	18	22	58	6	2					60,42	**04800**	60,42	**04800**
5,00	8,0	4,80	16	18	54	6	2	52,58	**05000**	52,58	**05000**				

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter



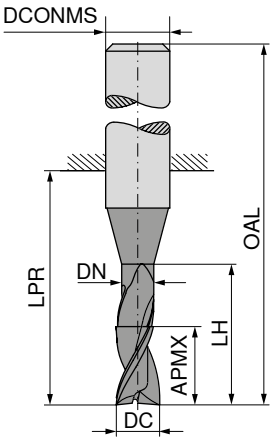

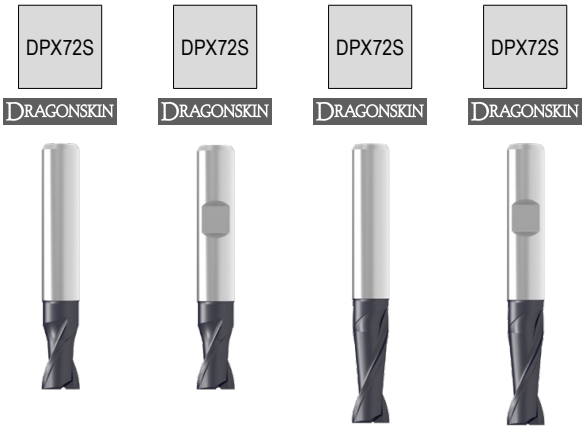

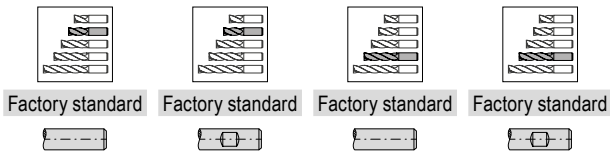

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 943 ... EUR V1/5B		52 944 ... EUR V1/5B		52 947 ... EUR V1/5B		52 949 ... EUR V1/5B	
5,00	15,0	4,80	18	22	58	6	2					57,95	**05000**	57,95	**05000**
5,50	8,0	5,30	16	18	54	6	2	56,62	**05500**	56,62	**05500**				
5,75	10,0	5,55	16	18	54	6	2	59,54	**05700**	59,54	**05700**				
5,75	15,0	5,55	18	22	58	6	2					61,73	**05700**	61,73	**05700**
6,00	10,0	5,80	16	18	54	6	2	52,58	**06000**	52,58	**06000**				
6,00	16,0	5,80	20	22	58	6	2					57,95	**06000**	57,95	**06000**
6,75	10,0	6,45	16	23	59	8	2			71,55	**06700**				
6,75	16,0	6,45	23	34	70	8	2					78,80	**06700**	78,80	**06700**
7,00	12,0	6,70	18	23	59	8	2	74,15	**07000**	74,15	**07000**				
7,00	16,0	6,70	23	34	70	8	2					71,13	**07000**	71,13	**07000**
7,75	12,0	7,45	18	23	59	8	2	68,94	**07700**	68,94	**07700**				
7,75	16,0	7,45	23	34	70	8	2					74,60	**07700**	74,60	**07700**
8,00	12,0	7,70	20	23	59	8	2	63,44	**08000**	63,44	**08000**				
8,00	22,0	7,70	25	34	70	8	2					69,98	**08000**	69,98	**08000**
8,70	12,0	8,40	12	27	67	10	2			110,50	**08700**				
9,00	13,0	8,70	13	27	67	10	2	105,30	**09000**	105,30	**09000**				
9,00	22,0	8,70	22	33	73	10	2					119,80	**09000**	119,80	**09000**
9,70	13,0	9,40	13	27	67	10	2	107,90	**09700**	107,90	**09700**				
9,70	22,0	9,40	22	33	73	10	2					122,10	**09700**	122,10	**09700**
10,00	13,0	9,70	13	27	67	10	2	93,58	**10000**	93,58	**10000**				
10,00	25,0	9,70	25	33	73	10	2					118,00	**10000**	118,00	**10000**
11,00	25,0	10,60	25	39	84	12	2					162,40	**11000**	162,40	**11000**
11,70	16,0	11,30	16	28	73	12	2	155,00	**11700**	155,00	**11700**				
12,00	16,0	11,60	16	28	73	12	2	129,90	**12000**	129,90	**12000**				
12,00	26,0	11,60	26	39	84	12	2					159,50	**12000**	159,50	**12000**
13,70	16,0	13,30	26	30	75	14	2			204,40	**13700**				
14,00	16,0	13,60	28	30	75	14	2	173,90	**14000**	173,90	**14000**				
16,00	20,0	15,50	32	35	83	16	2	197,00	**16000**	197,00	**16000**				
16,00	30,0	15,50	40	45	93	16	2					258,00	**16000**	258,00	**16000**
18,00	20,0	17,50	34	37	85	18	2	252,10	**18000**	252,10	**18000**				
20,00	25,0	19,50	40	43	93	20	2	315,70	**20000**	315,70	**20000**				
20,00	40,0	19,50	50	54	104	20	2					389,70	**20000**	389,70	**20000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

14

End milling cutter

N | λ_s=30° γ_s=13°



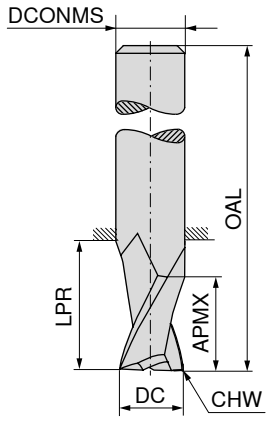

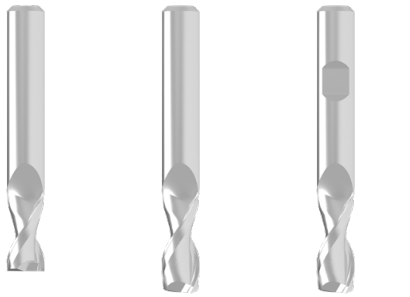

	Factory standard	≈DIN 6527	≈DIN 6527
	50 593 ...	50 594 ...	50 594 ...
DC e8 mm	EUR V0/5A	EUR V0/5A	EUR V0/5A
0,25		38,25 925	
0,30		38,25 930	
0,35		38,25 935	
0,40		38,25 940	
0,50		38,25 950	
0,60		38,25 960	
0,70		38,25 970	
0,80		38,25 980	
0,90		38,25 990	
1,00		39,41 010	
1,10		39,41 011	
1,20		39,41 012	
1,40		39,41 014	
1,50		39,41 015	
1,60		39,41 016	
1,80		39,41 018	
2,00		39,41 020	
2,00	18,54 020		
2,50		39,41 025	
2,50	18,54 025		
2,80			32,31 028
3,00			32,31 030
3,00	18,54 030		
3,50	18,54 035		
3,80			32,31 038
4,00			32,31 040
4,00	18,97 040		
4,50	23,48 045		
4,80			32,31 048
5,00			32,31 050
5,00	23,48 050		
5,50	26,66 055		
5,80			32,31 058
6,00			32,31 060
6,50	35,92 065		
6,80			37,81 068
7,00			37,81 070
7,00	35,92 070		
7,50	36,35 075		
7,80			37,81 078

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter



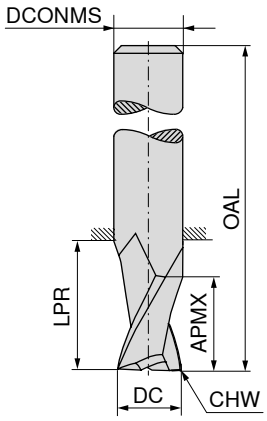

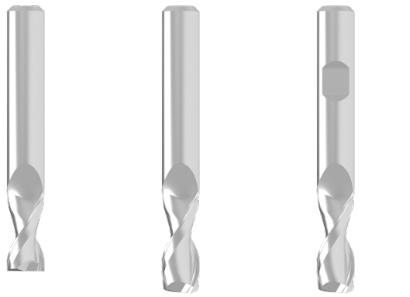

Factory standard

≈DIN 6527

≈DIN 6527

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	50 593 ... EUR V0/5A		50 594 ... EUR V0/5A		50 594 ... EUR V0/5A	
8,00	19,0	27	63	8,0	0,15	2					37,81	**080**
8,50	20,0	24	60	8,5	0,15	2	48,37	**085**				
8,70	19,0	32	72	10,0	0,15	2					58,67	**087**
9,00	19,0	32	72	10,0	0,15	2					58,67	**090**
9,00	20,0	24	60	9,0	0,15	2	48,37	**090**				
9,50	22,0	34	70	9,5	0,15	2	57,80	**095**				
9,70	22,0	32	72	10,0	0,15	2					58,67	**097**
10,00	22,0	32	72	10,0	0,15	2					58,67	**100**
10,70	26,0	38	83	12,0	0,15	2					90,84	**107**
11,00	22,0	30	70	11,0	0,15	2	76,06	**110**				
11,00	26,0	38	83	12,0	0,15	2					90,84	**110**
11,70	26,0	38	83	12,0	0,15	2					90,84	**117**
12,00	26,0	38	83	12,0	0,15	2					86,64	**120**
13,00	25,0	30	75	13,0	0,15	2	109,50	**130**				
13,70	26,0	38	83	14,0	0,15	2					111,00	**137**
14,00	22,0	30	75	14,0	0,15	2	103,10	**140**				
14,00	26,0	38	83	14,0	0,15	2					111,00	**140**
15,00	25,0	30	75	15,0	0,15	2	144,60	**150**				
15,70	32,0	44	92	16,0	0,15	2					147,70	**157**
16,00	32,0	44	92	16,0	0,15	2					132,30	**160**
17,70	32,0	44	92	18,0	0,15	2					242,00	**177**
18,00	32,0	44	92	18,0	0,15	2					172,60	**180**
19,70	38,0	54	104	20,0	0,15	2					323,10	**197**
20,00	38,0	54	104	20,0	0,15	2					218,80	**200**

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O	○	○	○

→ v_c/f_z Page 480–483

End milling cutter



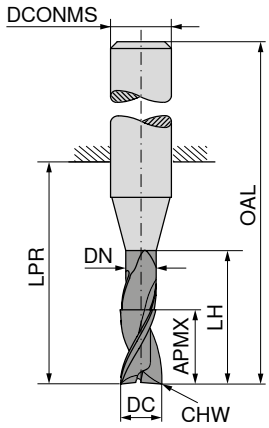

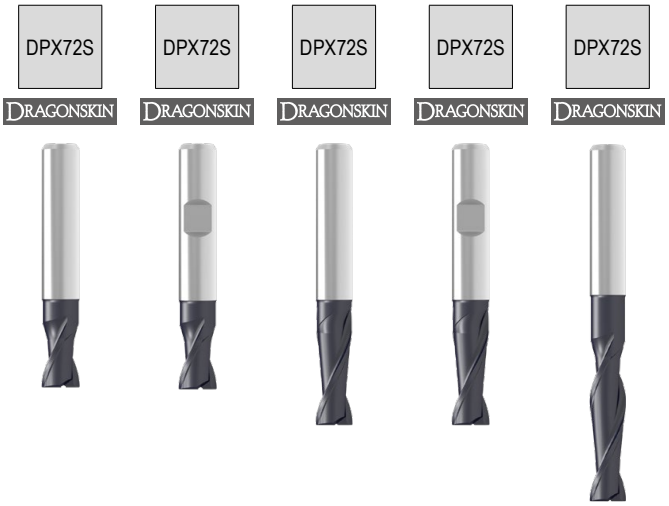

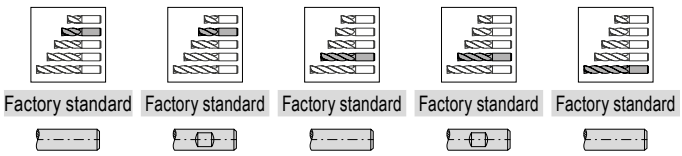

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 939 ... EUR V1/5B		52 940 ... EUR V1/5B		52 945 ... EUR V1/5B		52 946 ... EUR V1/5B		52 950 ... EUR V1/5B	
2,00	4	1,90	8	18	54	6	0,04	2	46,07	**02000**	46,07	**02000**						
2,00	5			10	38	3	0,04	2	39,84	**32000**								
2,00	6			10	38	2	0,04	2					57,95	**22000**				
2,00	7	1,90	10	22	58	6	0,04	2							50,42	**02000**		
2,50	4	2,40	8	18	54	6	0,07	2	46,07	**02500**	46,07	**02500**						
2,50	6			10	38	3	0,07	2	46,07	**32500**								
2,80	4	2,70	9	18	54	6	0,07	2	52,30	**02800**	52,30	**02800**						
2,80	7			10	38	3	0,07	2					63,89	**32800**				
2,80	7	2,70	12	22	58	6	0,07	2							52,58	**02800**		
3,00	6	2,90	9	18	54	6	0,07	2	46,07	**03000**	46,07	**03000**						
3,00	6			10	38	3	0,07	2	46,07	**33000**								
3,00	7			10	38	3	0,07	2					57,95	**33000**				
3,00	10	2,90	14	22	58	6	0,07	2							50,42	**03000**		
3,00	20	2,90	24	32	60	3	0,07	2									72,57	**33000**
3,50	6	3,30	9	18	54	6	0,07	2	49,68	**03500**	49,68	**03500**						
3,80	7	3,60	12	18	54	6	0,07	2	52,30	**03800**	52,30	**03800**						
3,80	8	3,60	20	22	50	4	0,07	2					63,89	**43800**				
3,80	10	3,60	18	22	58	6	0,07	2							52,58	**03800**		
4,00	7	3,80	12	18	54	6	0,07	2	46,07	**04000**	46,07	**04000**						
4,00	8	3,80	20	22	50	4	0,07	2					57,95	**44000**				
4,00	13	3,80	18	22	58	6	0,07	2							50,42	**04000**		
4,00	30	3,80	35	47	75	4	0,07	2									79,97	**44000**
4,50	7	4,30	12	18	54	6	0,12	2	49,68	**04500**	49,68	**04500**						
4,80	8	4,60	16	18	54	6	0,12	2	52,30	**04800**	52,30	**04800**						
4,80	10	4,60	20	22	50	5	0,12	2					63,89	**54800**				
4,80	13	4,60	18	22	58	6	0,12	2							52,58	**04800**		
5,00	8	4,80	16	18	54	6	0,12	2	46,07	**05000**	46,07	**05000**						
5,00	10	4,80	20	22	50	5	0,12	2					57,95	**55000**				
5,00	15	4,80	18	22	58	6	0,12	2							50,42	**05000**		
5,00	30	4,80	35	47	75	5	0,12	2									85,62	**55000**
5,50	8	5,30	16	18	54	6	0,12	2	49,68	**05500**	49,68	**05500**						
5,75	10	5,55	16	18	54	6	0,12	2	58,08	**05700**	58,08	**05700**						
5,75	15	5,55	18	22	58	6	0,12	2					65,18	**05700**	65,18	**05700**		
6,00	10	5,80	16	18	54	6	0,12	2	46,07	**06000**	46,07	**06000**						
6,00	16	5,80	20	22	58	6	0,12	2					57,95	**06000**	57,95	**06000**		
6,00	40	5,80	60	64	100	6	0,12	2									99,08	**06000**
6,75	16	6,45	23	34	70	8	0,12	2					92,72	**06700**	92,72	**06700**		
7,00	12	6,70	18	23	59	8	0,12	2	65,34	**07000**	65,34	**07000**						

P	●	●	●	●	●
M	○	○	○	○	○
K	●	●	●	●	●
N	○	○	○	○	○
S	○	○	○	○	○
H	○	○	○	○	○
O	○	○	○	○	○

→ v_c/f_z Page 480–485

Continued on next page

End milling cutter



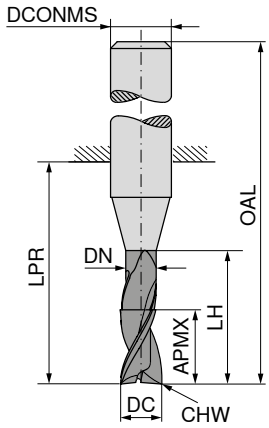

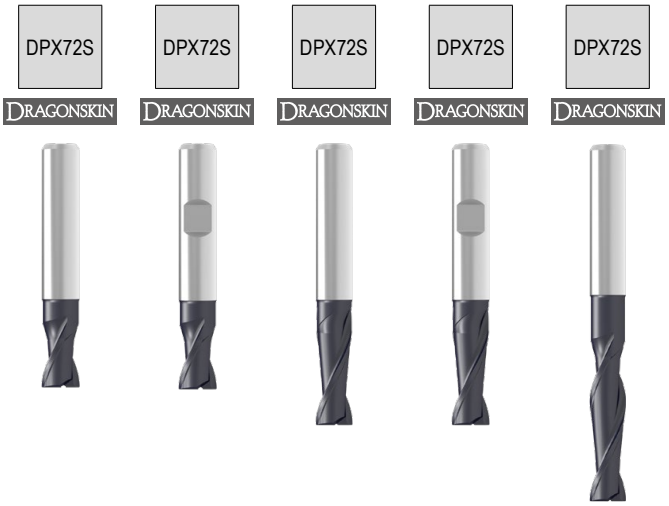

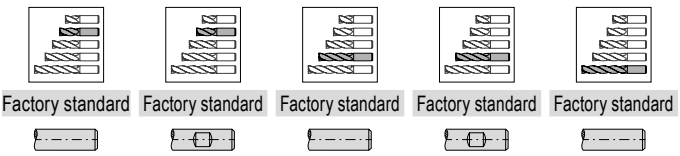

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 939 ... EUR V1/5B		52 940 ... EUR V1/5B		52 945 ... EUR V1/5B		52 946 ... EUR V1/5B		52 950 ... EUR V1/5B	
7,00	16	6,70	23	34	70	8	0,12	2					83,42	**07000**	83,42	**07000**		
7,75	12	7,45	18	23	59	8	0,12	2	65,48	**07700**	65,48	**07700**						
7,75	16	7,45	23	34	70	8	0,12	2					80,10	**07700**	80,10	**07700**		
8,00	12	7,70	20	23	59	8	0,12	2	56,62	**08000**	56,62	**08000**						
8,00	22	7,70	25	34	70	8	0,12	2					69,98	**08000**	69,98	**08000**		
8,00	40	7,70	60	64	100	8	0,12	2									114,60	**08000**
9,00	13	8,70	22	27	67	10	0,20	2	92,72	**09000**	92,72	**09000**						
9,00	22	8,70	28	33	73	10	0,20	2					133,30	**09000**	133,30	**09000**		
9,70	13	9,40	22	27	67	10	0,20	2	101,30	**09700**	101,30	**09700**						
9,70	22	9,40	28	33	73	10	0,20	2					136,20	**09700**	136,20	**09700**		
10,00	13	9,70	24	27	67	10	0,20	2	87,06	**10000**	87,06	**10000**						
10,00	25	9,70	30	33	73	10	0,20	2					118,00	**10000**	118,00	**10000**		
10,00	40	9,70	55	60	100	10	0,20	2									159,50	**10000**
11,00	25	10,60	32	39	84	12	0,20	2					181,10	**11000**	181,10	**11000**		
12,00	16	11,60	26	28	73	12	0,20	2	120,10	**12000**	120,10	**12000**						
12,00	26	11,60	35	39	84	12	0,20	2					159,50	**12000**	159,50	**12000**		
12,00	45	11,60	50	55	100	12	0,20	2									211,70	**12000**
13,70	26	13,30	35	39	84	14	0,20	2					233,30	**13700**	233,30	**13700**		
14,00	16	13,60	28	30	75	14	0,20	2	162,40	**14000**	162,40	**14000**						
14,00	26	13,60	35	39	84	14	0,20	2					204,40	**14000**	204,40	**14000**		
16,00	20	15,50	32	35	83	16	0,20	2	172,60	**16000**	172,60	**16000**						
16,00	30	15,50	40	45	93	16	0,20	2					258,00	**16000**	258,00	**16000**		
16,00	65	15,50	90	102	150	16	0,20	2									486,70	**16000**
20,00	25	19,50	40	43	93	20	0,30	2	291,20	**20000**	291,20	**20000**						
20,00	40	19,50	50	54	104	20	0,30	2					389,70	**20000**	389,70	**20000**		
20,00	65	19,50	90	100	150	20	0,30	2									601,20	**20000**

P	●	●	●	●	●
M	○	○	○	○	○
K	●	●	●	●	●
N	○	○	○	○	○
S	○	○	○	○	○
H	○	○	○	○	○
O	○	○	○	○	○

→ v_c/f_z Page 480–485

End milling cutter



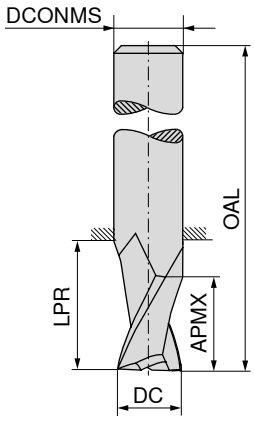

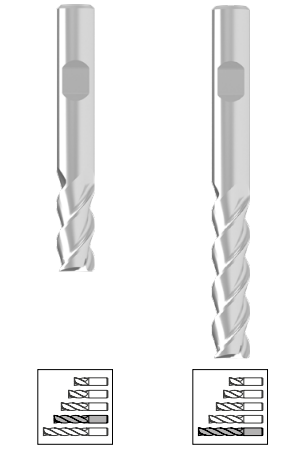

								≈DIN 6527		≈DIN 6527	
								50 614 ...		50 614 ...	
DC e8	APMX	LPR	OAL	DCONMS h5	ZEFP			EUR		EUR	
mm	mm	mm	mm	mm				V0/5A		V0/5A	
3,0	8	21	57	6	3			35,32	030		
3,5	11	21	57	6	3			38,25	035		
3,5	15	23	59	6	3					58,96	036
4,0	11	21	57	6	3			35,32	040		
4,0	19	27	63	6	3					59,09	041
4,5	13	21	57	6	3			38,25	045		
4,5	19	27	63	6	3					58,96	046
5,0	13	21	57	6	3			34,91	050		
5,0	24	32	68	6	3					64,32	051
5,5	13	21	57	6	3			38,25	055		
5,5	24	32	68	6	3					64,32	056
6,0	13	21	57	6	3			35,32	060		
6,0	24	32	68	6	3					62,28	061
6,5	16	27	63	8	3			46,07	065		
6,5	30	44	80	8	3					88,63	066
7,0	16	27	63	8	3			44,34	070		
7,0	30	44	80	8	3					88,63	071
7,5	19	27	63	8	3			42,15	075		
7,5	30	44	80	8	3					88,63	076
8,0	19	27	63	8	3			40,71	080		
8,0	38	52	88	8	3					81,27	081
8,5	19	32	72	10	3			63,60	085		
8,5	38	48	88	10	3					139,90	086
9,0	19	32	72	10	3			63,60	090		
9,0	38	48	88	10	3					139,90	091
9,5	22	32	72	10	3			72,86	095		
9,5	38	48	88	10	3					139,90	096
10,0	22	32	72	10	3			65,03	100		
10,0	45	55	95	10	3					136,20	101
11,0	26	38	83	12	3			103,10	110		
11,0	45	57	102	12	3					197,00	111
12,0	26	38	83	12	3			93,73	120		
12,0	53	65	110	12	3					197,00	121
14,0	26	38	83	14	3			120,50	140		
14,0	53	65	110	14	3					252,10	141
16,0	32	44	92	16	3			165,20	160		
16,0	63	75	123	16	3					341,90	161
18,0	32	44	92	18	3			199,90	180		
18,0	63	75	123	18	3					414,30	181
20,0	38	54	104	20	3			259,40	200		
20,0	75	91	141	20	3					551,90	201
P								○		○	
M								●		●	
K								○		○	
N								○		○	
S								●		●	
H											
O								○		○	

→ v_c/f_z Page 480–485

End milling cutter



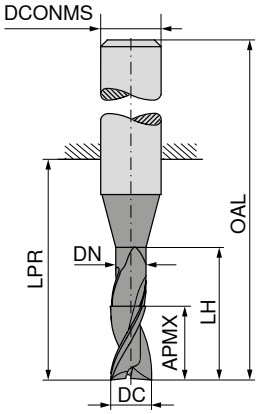

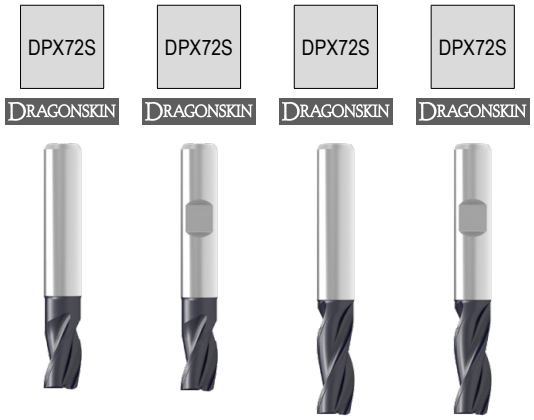

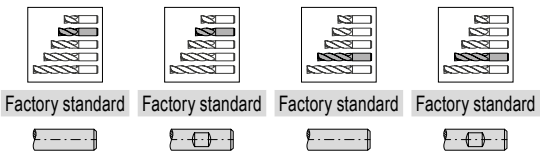

DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	52 921 ... EUR V1/5B		52 922 ... EUR V1/5B		52 926 ... EUR V1/5B		52 927 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm									
1,00	4	0,90	5	22	58	6	3					57,80	01000		
1,00	4			22	58	6	3							57,80	01000
1,50	3	1,40	6	18	54	6	3	52,46	01500	52,46	01500				
1,50	3	1,40	6	10	38	3	3	44,64	31500						
1,50	6	1,40	7	22	58	6	3					57,80	01500		
1,50	6			22	58	6	3							57,80	01500
2,00	4	1,90	8	18	54	6	3	52,46	02000	52,46	02000				
2,00	4	1,90	8	10	38	3	3	44,64	32000						
2,00	7	1,90	8	22	58	6	3					57,80	02000		
2,00	7			22	58	6	3							57,80	02000
2,50	4	2,40	8	18	54	6	3	51,57	02500	51,57	02500				
2,50	4	2,40	8	10	38	3	3	44,64	32500						
2,80	6	2,70	9	18	54	6	3	56,07	02800	56,07	02800				
3,00	6	2,90	9	18	54	6	3	52,46	03000	52,46	03000				
3,00	6	2,90	9	10	38	3	3	44,64	33000						
3,00	10	2,90	14	22	58	6	3					57,80	03000	57,80	03000
3,50	6	3,30	9	18	54	6	3	51,57	03500	51,57	03500				
3,80	6	3,60	12	18	54	6	3	56,07	03800	56,07	03800				
4,00	7	3,80	12	18	54	6	3	52,46	04000	52,46	04000				
4,00	13	3,80	17	22	58	6	3					57,80	04000	57,80	04000
4,50	7	4,30	12	18	54	6	3	51,57	04500	51,57	04500				
4,80	8	4,60	16	18	54	6	3	56,07	04800	56,07	04800				
5,00	8	4,80	16	18	54	6	3	52,46	05000	52,46	05000				
5,00	15	4,80	19	22	58	6	3					57,80	05000	57,80	05000
5,50	8	5,30	16	18	54	6	3	51,57	05500	51,57	05500				
5,75	8	5,55	16	18	54	6	3	61,98	05700	61,98	05700				
6,00	10	5,80	16	18	54	6	3	52,46	06000	52,46	06000				
6,00	16	5,80	20	22	58	6	3					57,80	06000	57,80	06000
7,00	19	6,70	23	28	64	8	3					74,31	07000	74,31	07000
7,75	10	7,45	18	22	58	8	3	69,98	07700	69,98	07700				
8,00	12	7,70	20	23	59	8	3	61,26	08000	61,26	08000				
8,00	22	7,70	26	34	70	8	3					70,82	08000	70,82	08000
9,00	23	8,70	28	32	72	10	3					127,80	09000	127,80	09000
9,70	12	9,40	18	19	59	10	3	107,80	09700	107,80	09700				
10,00	13	9,70	24	27	67	10	3	94,31	10000	94,31	10000				
10,00	25	9,70	31	33	73	10	3					118,30	10000	118,30	10000
11,00	25	10,60	34	38	83	12	3					170,90	11000	170,90	11000
11,70	16	11,30	20	22	67	12	3	152,20	11700	152,20	11700				

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

Continued on next page

End milling cutter



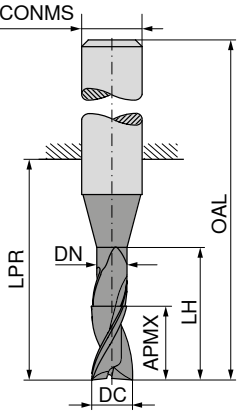

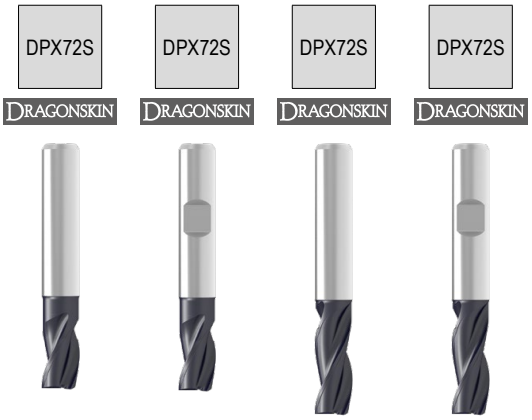

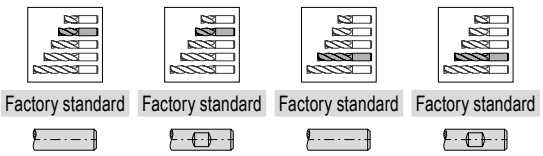

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 921 ... EUR V1/5B		52 922 ... EUR V1/5B		52 926 ... EUR V1/5B		52 927 ... EUR V1/5B	
12,00	16	11,60	26	28	73	12	3	129,80	**12000**	129,80	**12000**				
12,00	26	11,60	37	39	84	12	3					159,50	**12000**	159,50	**12000**
14,00	16	13,60	28	30	75	14	3	173,90	**14000**	173,90	**14000**				
14,00	26	13,60	37	39	84	14	3					202,80	**14000**	202,80	**14000**
16,00	20	15,50	32	35	83	16	3	198,50	**16000**	198,50	**16000**				
16,00	32	15,50	43	45	93	16	3					255,00	**16000**	255,00	**16000**
20,00	25	19,50	40	43	93	20	3	315,70	**20000**	315,70	**20000**				
20,00	40	19,50	52	54	104	20	3					391,00	**20000**	391,00	**20000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

End milling cutter



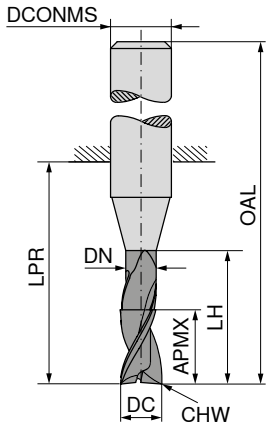

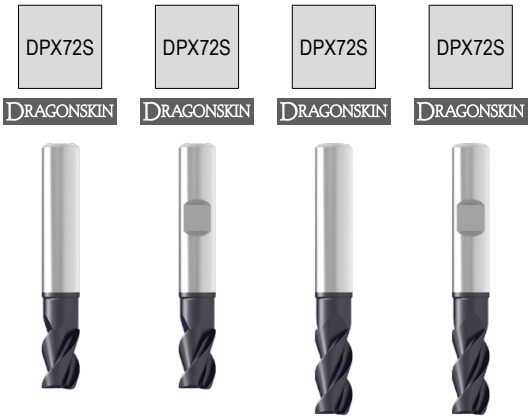

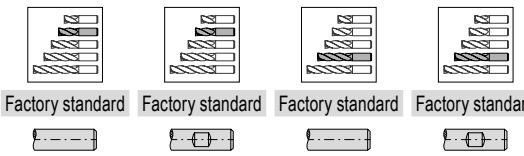

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	CHW mm	DCONMS h6 mm	ZEFP	52 929 ... EUR V1/5B		52 930 ... EUR V1/5B		52 932 ... EUR V1/5B		52 933 ... EUR V1/5B	
2,0	4	1,9	8	18	54	0,04	6	3	52,58	**02000**	52,58	**02000**				
2,0	7	1,9	10	22	58	0,04	6	3					59,09	**02000**	59,09	**02000**
2,5	5	2,4	8	18	54	0,07	6	3	52,14	**02500**	52,14	**02500**				
3,0	6	2,9	9	18	54	0,07	6	3	52,58	**03000**	52,58	**03000**				
3,0	10	2,9	14	22	58	0,07	6	3					59,09	**03000**	59,09	**03000**
4,0	7	3,8	12	18	54	0,07	6	3	52,58	**04000**	52,58	**04000**				
4,0	13	3,8	17	22	58	0,07	6	3					59,09	**04000**	59,09	**04000**
5,0	8	4,8	16	18	54	0,12	6	3	52,58	**05000**	52,58	**05000**				
5,0	15	4,8	19	22	58	0,07	6	3					59,09	**05000**	59,09	**05000**
6,0	10	5,8	16	18	54	0,12	6	3	52,58	**06000**	52,58	**06000**				
6,0	16	5,8	20	22	58	0,12	6	3					59,09	**06000**	59,09	**06000**
7,0	11	6,7	18	23	59	0,12	8	3	67,80	**07000**	67,80	**07000**				
7,0	19	6,7	23	34	70	0,12	8	3					74,31	**07000**	74,31	**07000**
8,0	12	7,7	20	23	59	0,12	8	3	61,98	**08000**	61,98	**08000**				
8,0	22	7,7	26	34	70	0,12	8	3					71,27	**08000**	71,27	**08000**
9,0	13	8,7	22	27	67	0,20	10	3	104,90	**09000**	104,90	**09000**				
9,0	23	8,7	28	33	73	0,12	10	3					127,80	**09000**	127,80	**09000**
10,0	14	9,7	24	27	67	0,20	10	3	94,31	**10000**	94,31	**10000**				
10,0	25	9,7	31	33	73	0,20	10	3					119,20	**10000**	119,20	**10000**
12,0	16	11,6	26	28	73	0,20	12	3	130,80	**12000**	130,80	**12000**				
12,0	28	11,6	37	39	84	0,20	12	3					160,70	**12000**	160,70	**12000**
14,0	18	13,6	28	30	75	0,20	14	3	175,30	**14000**	175,30	**14000**				
14,0	30	13,6	37	39	84	0,20	14	3					204,40	**14000**	204,40	**14000**
16,0	20	15,5	32	35	83	0,20	16	3	197,00	**16000**	197,00	**16000**				
16,0	35	15,5	43	45	93	0,20	16	3					259,40	**16000**	259,40	**16000**
20,0	25	19,5	40	43	93	0,30	20	3	318,70	**20000**	318,70	**20000**				
20,0	40	19,5	52	54	104	0,20	20	3					389,70	**20000**	389,70	**20000**

P	○	○	○	○
M	●	●	●	●
K	○	○	○	○
N	●	●	●	●
S	●	●	●	●
H				
O	●	●	●	●

14

→ v_c/f_z Page 480–483

End milling cutter



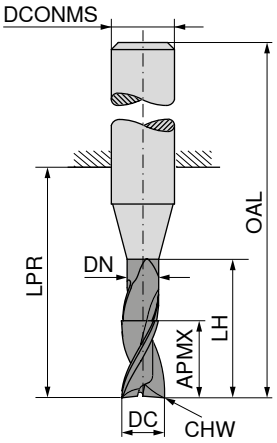

DPX72S

DRAGONSKIN

Factory standard

52 935 ...

DC e8 mm	DN mm	APMX mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1/5B	
3	3,0	20	20	24	60	6	0,07	3	115,30	**03000**
4	3,8	30	35	39	75	6	0,07	3	115,30	**04000**
5	4,8	30	35	39	75	6	0,12	3	115,30	**05000**
6	5,8	40	60	64	100	6	0,12	3	111,40	**06000**
8	7,7	40	60	64	100	8	0,12	3	127,10	**08000**
10	9,7	40	55	60	100	10	0,20	3	168,00	**10000**
12	11,6	45	50	55	100	12	0,20	3	230,30	**12000**
14	13,6	45	50	55	100	14	0,20	3	352,00	**14000**
16	15,5	65	90	102	150	16	0,20	3	518,60	**16000**
20	19,5	65	90	100	150	20	0,30	3	601,20	**20000**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–485

Mini milling cutter

▲ Shank similar to DIN 6535



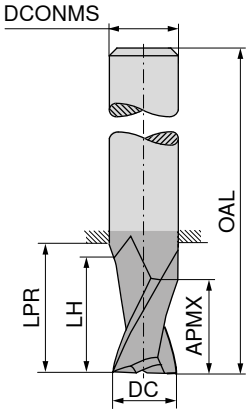



Factory standard | Factory standard

DC e8 mm	APMX mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 598 ... EUR V0/5A		50 599 ... EUR V0/5A	
2,00	4	4,0	10	35	6	3	22,30	020	31,30	020
2,50	4	4,0	10	35	6	3	24,05	025	33,17	025
3,00	5	5,0	10	36	6	3	22,30	030	31,30	030
3,50	5	5,0	10	36	6	3	24,05	035	33,33	035
4,00	7	7,0	12	38	6	3	22,30	040	31,30	040
4,50	7	7,0	12	38	6	3	24,05	045	33,33	045
5,00	8	8,0	13	39	6	3	22,30	050	31,30	050
5,50	8	8,0	13	39	6	3	24,05	055	33,33	055
5,75	8	8,0	13	39	6	3	24,05	057	33,33	057
6,00	8	8,5	13	39	6	3	22,30	060	31,30	060
6,75	11	11,5	16	43	8	3	31,74	067	42,44	067
7,00	11	11,5	16	43	8	3	30,56	070	39,41	070
7,75	11	11,5	16	43	8	3	32,03	077	42,87	077
8,00	11	11,5	16	43	8	3	35,06	080	42,15	080
8,70	13	13,5	18	50	10	3	49,99	087	62,86	087
9,00	13	13,5	18	50	10	3	45,64	090	58,23	090
9,70	13	13,5	18	50	10	3	49,99	097	62,86	097
10,00	13	13,5	18	50	10	3	49,68	100	60,25	100
12,00	15	15,5	24	55	12	3	64,73	120	78,24	120
14,00	15	15,5	26	58	14	3	110,80	140	124,10	140
16,00	18	18,5	28	62	16	3	124,30	160	142,00	160
18,00	20	20,5	35	70	18	3	157,80	180	176,70	180
20,00	22	22,5	40	75	20	3	199,90	200	218,80	200

P	○	●
M	○	○
K	○	●
N	●	○
S	○	○
H		○
O	●	○

→ v_c/f_z Page 480–483

Mini milling cutter

▲ Shank similar to DIN 6535



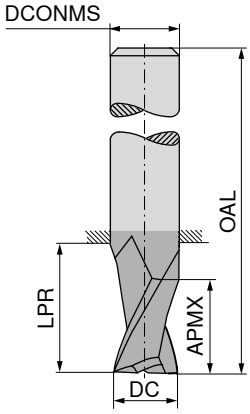

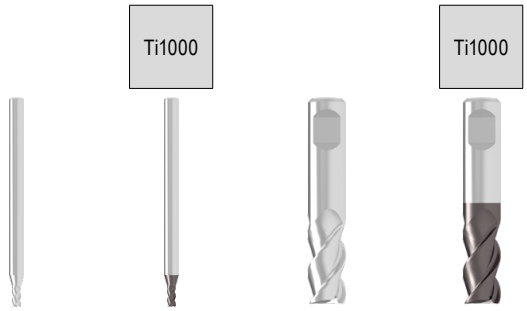

DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	Factory standard 50 664 ... EUR V0/5A		Factory standard 50 691 ... EUR V0/5A		Factory standard 50 664 ... EUR V0/5A		Factory standard 50 691 ... EUR V0/5A	
0,50	1,5	17	45	3	3	24,05	**30500**	29,78	**30500**				
1,00	2,0	12	45	6	3					24,01	**01000**	25,77	**01000**
1,00	2,0	17	45	3	3	24,05	**31000**	29,78	**31000**				
1,20	2,0	12	45	6	3					24,01	**01200**	25,77	**01200**
1,20	3,0	17	45	3	3	24,01	**31200**	29,78	**31200**				
1,50	3,0	12	45	6	3					24,01	**01500**	25,77	**01500**
1,50	3,0	17	45	3	3	24,05	**31500**	29,78	**31500**				
1,80	3,0	12	45	6	3					24,01	**01800**	25,77	**01800**
1,80	3,0	17	45	3	3	24,01	**31800**	29,78	**31800**				
2,00	4,0	13	45	6	3					24,68	**02000**	30,42	**02000**
2,50	6,0	13	45	6	3					24,68	**02500**	30,42	**02500**
2,80	6,0	13	45	6	3					24,68	**02800**	30,42	**02800**
3,00	6,0	13	45	6	3					24,68	**03000**	30,42	**03000**
3,50	7,0	13	45	6	3					25,77	**03500**	30,42	**03500**
3,80	7,0	13	45	6	3					25,77	**03800**	30,42	**03800**
4,00	7,0	12	45	6	3					25,77	**04000**	30,42	**04000**
4,50	8,0	11	45	6	3					26,37	**04500**	30,42	**04500**
4,80	8,0	11	45	6	3					26,37	**04800**	30,42	**04800**
5,00	8,0	11	45	6	3					26,37	**05000**	30,42	**05000**
5,50	8,0	9	45	6	3					26,37	**05500**	30,42	**05500**
5,75	8,0	9	45	6	3					26,37	**05700**	30,42	**05700**
6,00	8,0	9	45	6	3					26,37	**06000**	30,42	**06000**
6,70	10,0	19	55	8	3					38,27	**06700**	30,42	**06700**
7,00	12,0	19	55	8	3					38,27	**07000**	30,42	**07000**
7,70	12,0	19	55	8	3					38,27	**07700**	43,22	**07700**
8,00	13,0	19	55	8	3					38,27	**08000**	43,22	**08000**
8,70	14,0	17	55	10	3					54,10	**08700**	52,55	**08700**
9,00	16,0	17	55	10	3					54,10	**09000**	52,55	**09000**
9,70	16,0	17	55	10	3					54,10	**09700**	52,55	**09700**
10,00	16,0	17	55	10	3					54,10	**10000**	52,55	**10000**
P								●				●	
M								●				●	
K								●				●	
N						●		○		●		○	
S						○		●		○		●	
H													
O													

→ v_c/f_z Page 456–459

Mini milling cutter

▲ Shank similar to DIN 6535



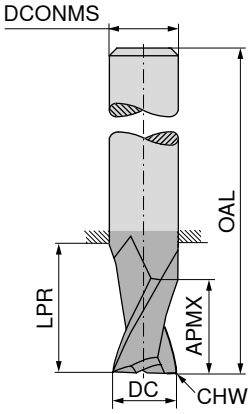

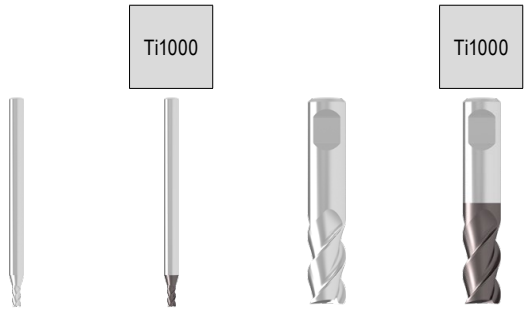

DC e8 mm	CHW mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	Factory standard	Factory standard	Factory standard	Factory standard
							50 608 ...	50 609 ...	50 608 ...	50 609 ...
							EUR V0/5A	EUR V0/5A	EUR V0/5A	EUR V0/5A
0,50	0,05	1,5	17	45	3	3	24,20 30500	29,78 30500		
1,00	0,05	2,0	12	45	6	3			24,39 01000	31,37 01000
1,00	0,05	2,0	17	45	3	3	24,20 31000	29,78 31000		
1,20	0,05	2,0	12	45	6	3			24,39 01200	31,37 01200
1,20	0,05	3,0	17	45	3	3	24,20 31200	29,78 31200		
1,50	0,05	3,0	12	45	6	3			24,39 01500	31,37 01500
1,50	0,05	3,0	17	45	3	3	24,20 31500	29,78 31500		
1,80	0,05	3,0	12	45	6	3			24,39 01800	31,37 01800
1,80	0,05	3,0	17	45	3	3	24,20 31800	29,78 31800		
2,00	0,05	4,0	13	45	6	3			28,38 020	31,37 02000
2,50	0,05	6,0	13	45	6	3			25,49 025	31,37 02500
2,80	0,05	6,0	13	45	6	3			25,42 02800	31,37 02800
3,00	0,10	6,0	13	45	6	3			25,49 030	31,37 03000
3,50	0,10	7,0	13	45	6	3			26,58 03500	31,37 03500
3,80	0,10	7,0	13	45	6	3			26,58 03800	31,37 03800
4,00	0,10	7,0	12	45	6	3			26,51 040	31,37 04000
4,50	0,10	8,0	11	45	6	3			27,21 04500	31,37 04500
4,80	0,10	8,0	11	45	6	3			27,21 04800	31,37 04800
5,00	0,10	8,0	11	45	6	3			26,94 050	31,37 05000
5,50	0,10	8,0	9	45	6	3			27,21 05500	31,37 05500
5,75	0,10	8,0	9	45	6	3			27,21 05700	31,37 05700
6,00	0,10	8,0	9	45	6	3			26,94 060	31,37 06000
6,70	0,10	10,0	19	55	8	3			39,45 06700	31,37 06700
7,00	0,10	12,0	19	55	8	3			39,69 070	31,37 07000
7,70	0,10	12,0	19	55	8	3			39,45 07700	44,58 07700
8,00	0,10	13,0	19	55	8	3			39,69 080	44,58 08000
8,70	0,10	14,0	17	55	10	3			52,11 08700	54,16 08700
9,00	0,10	16,0	17	55	10	3			52,11 09000	54,16 09000
9,70	0,10	16,0	17	55	10	3			55,76 09700	54,16 09700
10,00	0,10	16,0	17	55	10	3			56,21 100	54,16 10000
P								●		●
M								●		●
K								●		●
N							●	○	●	○
S							○	●	○	●
H										
O										

→ v_c/f_z Page 456–459

End milling cutter



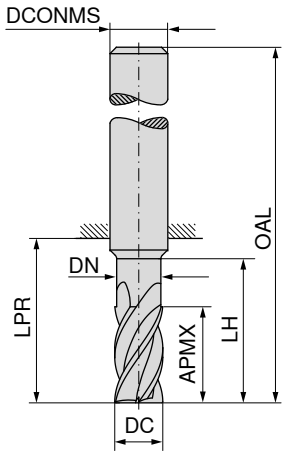

Factory standard

Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 209 ... EUR V1/5B		52 213 ... EUR V1/5B	
2	4	1,9	8	18	54	6	4	36,94	02000		
2	7			22	58	6	4			41,28	02000
3	6	2,9	9	18	54	6	4	36,94	03000		
3	10	2,8	14	22	58	6	4			41,28	03000
4	7	3,8	12	18	54	6	4	36,94	04000		
4	13	3,8	17	22	58	6	4			41,28	04000
5	8	4,8	16	18	54	6	4	36,94	05000		
5	15	4,8	19	22	58	6	4			41,28	05000
6	10	5,8	16	18	54	6	4	36,94	06000		
6	16	5,7	20	22	58	6	4			41,28	06000
8	12	7,7	20	22	58	8	4	41,28	08000		
8	22	7,7	26	34	70	8	4			47,37	08000
10	14	9,7	24	26	66	10	4	65,03	10000		
10	25	9,6	31	33	73	10	4			83,74	10000
12	16	11,6	26	28	73	12	4	90,54	12000		
12	28	11,6	37	39	84	12	4			111,80	12000
14	18	13,6	28	30	75	14	4	125,40	14000		
16	22	15,5	32	34	82	16	4	136,20	16000		
16	35	15,6	43	45	93	16	4			176,70	16000
18	20	17,5	34	32	80	18	4	178,10	18000		
20	25	19,5	40	42	92	20	4	228,80	20000		
20	40	19,6	52	54	104	20	4			282,60	20000
P								●		●	
M								○		○	
K								●		●	
N								○		○	
S								○		○	
H											
O								○		○	

→ v_c/f_z Page 480–483

End milling cutter

▲ Cutting edges with irregular pitch

N | λ_s=30° γ_s=12° | HPC



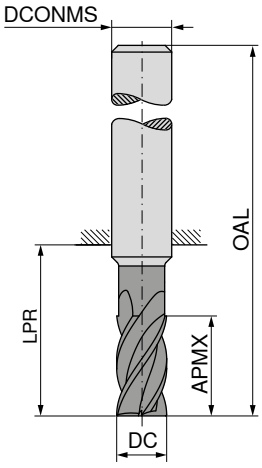

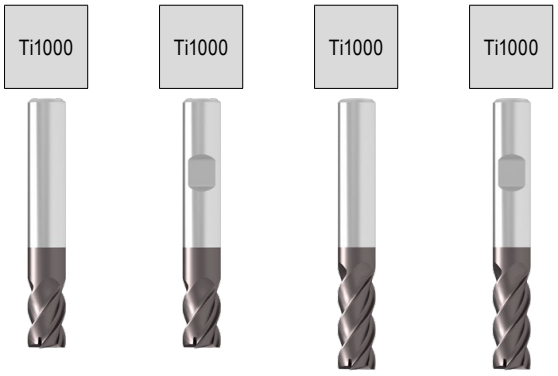

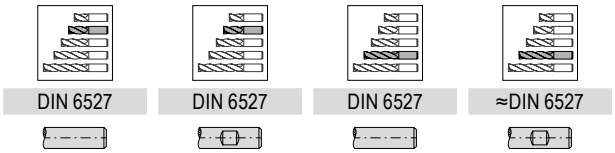

	DIN 6527	DIN 6527	DIN 6527	≈DIN 6527
	52 121 ...	**52 131 ...**	**52 126 ...**	**52 132 ...**

DC $_{e8}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR V1		EUR V1		EUR V1		EUR V1	
3,0	6	18	54	6	4	64,46	**030**	64,46	**030**				
3,0	10	22	58	6	4					73,15	**030**	73,15	**030**
3,5	7	18	54	6	4	64,46	**035**	64,46	**035**				
3,5	13	22	58	6	4					73,15	**035**	73,15	**035**
4,0	7	18	54	6	4	64,46	**040**	64,46	**040**				
4,0	13	22	58	6	4					73,15	**040**	73,15	**040**
4,5	8	18	54	6	4	64,46	**045**	64,46	**045**				
4,5	15	22	58	6	4					73,15	**045**	73,15	**045**
5,0	8	18	54	6	4	64,46	**050**	64,46	**050**				
5,0	15	22	58	6	4					73,15	**050**	73,15	**050**
6,0	10	18	54	6	4	64,46	**060**	64,46	**060**				
6,0	16	22	58	6	4					73,15	**060**	73,15	**060**
8,0	12	23	59	8	4	74,47	**080**	74,47	**080**				
8,0	22	34	70	8	4					89,09	**080**	89,09	**080**
10,0	14	27	67	10	4	113,00	**100**	113,00	**100**				
10,0	25	33	73	10	4					146,30	**100**	146,30	**100**
12,0	16	28	73	12	4	155,00	**120**	155,00	**120**				
12,0	28	39	84	12	4					189,80	**120**	189,80	**120**
14,0	16	30	75	14	4	208,50	**140**	208,50	**140**				
14,0	30	39	84	14	4					233,30	**140**	233,30	**140**
16,0	20	35	83	16	4	230,30	**160**	230,30	**160**				
16,0	35	45	93	16	4					289,80	**160**	289,80	**160**
18,0	20	32	80	18	4	270,90	**180**	270,90	**180**				
18,0	35	45	93	18	4					341,90	**180**	341,90	**180**
20,0	25	43	93	20	4	340,60	**200**	340,60	**200**				
20,0	40	54	104	20	4					440,50	**200**	440,50	**200**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

End milling cutter



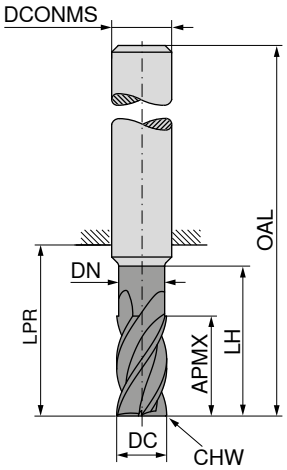

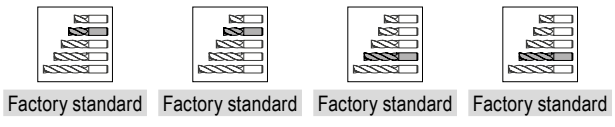

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 206 ... EUR V1/5B		52 207 ... EUR V1/5B		52 210 ... EUR V1/5B		52 211 ... EUR V1/5B	
1,5	3	1,4	6	10	38	3	0,02	4	45,36	**31500**						
2,0	4	1,9	8	10	38	3	0,03	4	39,41	**32000**						
2,0	4	1,9	8	18	54	6	0,03	4	45,64	**02000**	45,64	**02000**				
2,0	7			10	38	2	0,03	4					57,34	**22000**		
2,5	4	2,4	8	10	38	3	0,04	4	39,41	**32500**						
3,0	6	2,9	9	10	38	3	0,04	4	39,41	**33000**						
3,0	6	2,9	9	18	54	6	0,04	4	45,64	**03000**	45,64	**03000**				
3,0	10	2,8	14	14	38	3	0,03	4					57,34	**33000**		
4,0	7	3,8	12	18	54	6	0,05	4	45,64	**04000**	45,64	**04000**				
4,0	13	3,8	17	22	50	4	0,04	4					57,34	**44000**		
5,0	8	4,8	16	18	54	6	0,06	4	45,64	**05000**	45,64	**05000**				
5,0	15	4,8	19	22	50	5	0,04	4					57,34	**55000**		
6,0	10	5,8	16	18	54	6	0,07	4	45,64	**06000**	45,64	**06000**				
6,0	16	5,7	20	22	58	6	0,04	4					57,34	**06000**	57,34	**06000**
7,0	19	6,7	23	27	63	8	0,05	4					73,88	**07000**		
8,0	12	7,7	20	22	58	8	0,08	4	55,91	**08000**	55,91	**08000**				
8,0	22	7,7	26	34	70	8	0,06	4					70,26	**08000**	70,26	**08000**
9,0	23	8,7	28	33	73	10	0,07	4					127,20	**09000**		
10,0	14	9,7	24	26	66	10	0,10	4	86,47	**10000**	86,47	**10000**				
10,0	25	9,6	31	33	73	10	0,08	4					117,90	**10000**	117,90	**10000**
11,0	26	10,6	34	39	84	12	0,10	4					170,90	**11000**		
12,0	16	11,6	26	28	73	12	0,13	4	118,30	**12000**	118,30	**12000**				
12,0	28	11,6	37	39	84	12	0,13	4					159,50	**12000**	159,50	**12000**
14,0	18	13,6	28	30	75	14	0,15	4	160,70	**14000**	160,70	**14000**				
14,0	30	13,6	37	39	84	14	0,15	4					201,40	**14000**		
16,0	22	15,5	32	34	82	16	0,18	4	172,60	**16000**	172,60	**16000**				
16,0	35	15,6	43	45	93	16	0,18	4					255,00	**16000**	255,00	**16000**
20,0	25	19,5	40	42	92	20	0,20	4	289,80	**20000**	289,80	**20000**				
20,0	40	19,6	52	54	104	20	0,20	4					388,30	**20000**	388,30	**20000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–483

End milling cutter

▲ Transition angle α = 30°



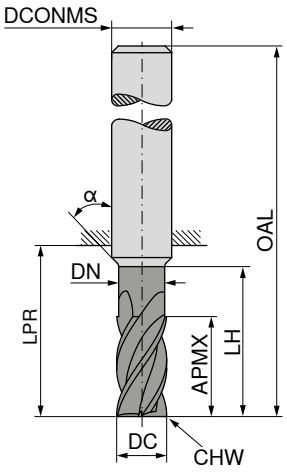

Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 219 ... EUR V1/5B		52 214 ... EUR V1/5B		52 222 ... EUR V1/5B	
3	16	2,8	32	47	75	3	0,04	4			59,54	33000		
4	16	3,8	32	47	75	4	0,05	4			62,28	44000		
4	20	3,8	48	72	100	4	0,05	4			66,61	44100		
5	20	4,8	35	47	75	5	0,06	4			69,67	55000		
5	25	4,8	55	72	100	5	0,06	4			77,79	55100		
6	24	5,8	42	44	80	6	0,07	4	89,66	06000				
6	30	5,8	62	64	100	6	0,07	4					104,30	06000
8	32	7,8	60	64	100	8	0,08	4	110,50	08000				
8	40	7,8	75	84	120	8	0,08	4					133,30	08000
10	40	9,8	58	60	100	10	0,10	4	150,60	10000				
10	50	9,8	78	80	120	10	0,10	4					181,10	10000
12	48	11,8	60	75	120	12	0,13	4	218,80	12000				
12	60	11,8	90	105	150	12	0,13	4					262,20	12000
14	45	13,8	50	55	100	14	0,15	4	285,40	14000				
14	56	13,8	95	105	150	14	0,15	4					320,20	14000
16	50	15,8	70	77	125	16	0,18	4	330,30	16000				
16	65	15,8	95	102	150	16	0,18	4					373,60	16000
18	72	17,8	95	102	150	18	0,18	4					543,30	18000
20	60	19,8	80	85	135	20	0,20	4	579,60	20000				
20	80	19,8	95	100	150	20	0,20	4					628,70	20000
25	75	24,5	90	94	150	25	0,25	4	766,40	25000				

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–485

End milling cutter with corner radius

▲ optimal quiet running with irregular helix

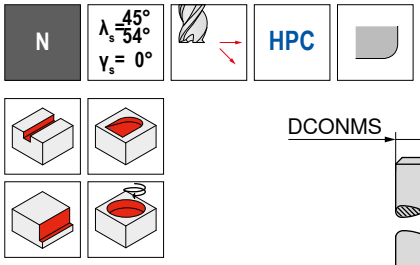

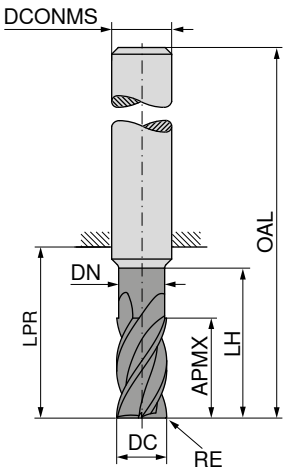

Ti1000

Factory standard

52 102 ...

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
2	0,2	7	1,8	11	58	6	4	90,39	**022**
3	0,3	8	2,8	13	58	6	4	86,47	**033**
4	0,4	11	3,8	16	58	6	4	83,14	**044**
5	0,5	13	4,8	18	58	6	4	83,14	**055**
6	0,5	16	5,8	26	58	6	4	86,33	**065**
6	1,0	16	5,8	26	58	6	4	86,33	**066**
8	0,5	22	7,8	32	64	8	4	122,40	**085**
8	1,0	22	7,8	32	64	8	4	122,40	**086**
8	1,5	22	7,8	32	64	8	4	122,40	**087**
10	0,5	25	9,8	35	73	10	4	156,60	**105**
10	1,0	25	9,8	35	73	10	4	156,60	**106**
10	1,5	25	9,8	35	73	10	4	156,60	**107**
12	0,5	28	11,8	38	84	12	4	208,50	**125**
12	1,0	28	11,8	38	84	12	4	208,50	**126**
12	1,5	28	11,8	38	84	12	4	208,50	**127**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–483

End milling cutter with corner radius



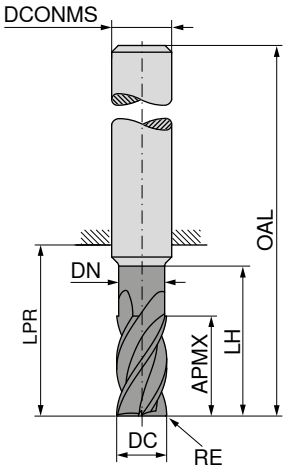

DPX72S

DRAGONSKIN

Factory standard

52 231 ...

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1/5B	
3	0,3	8	2,8	13	21	57	6	4	90,84	**03003**
3	0,5	8	2,8	13	21	57	6	4	90,84	**03005**
4	0,3	11	3,8	16	21	57	6	4	88,94	**04003**
4	0,5	11	3,8	16	21	57	6	4	88,94	**04005**
5	0,3	13	4,8	18	21	57	6	4	88,94	**05003**
5	0,5	13	4,8	18	21	57	6	4	88,94	**05005**
6	0,5	13	5,8	26	21	57	6	4	77,64	**06005**
6	1,0	13	5,8	26	21	57	6	4	77,64	**06010**
6	1,5	13	5,8	26	21	57	6	4	79,53	**06015**
8	0,5	19	7,8	32	27	63	8	4	118,20	**08005**
8	1,0	19	7,8	32	27	63	8	4	118,20	**08010**
8	1,5	19	7,8	32	27	63	8	4	124,30	**08015**
8	2,0	19	7,8	32	27	63	8	4	124,30	**08020**
10	1,0	22	9,8	35	32	72	10	4	147,70	**10010**
10	1,5	22	9,8	35	32	72	10	4	155,00	**10015**
10	2,0	22	9,8	35	32	72	10	4	155,00	**10020**
12	1,0	26	11,8	38	38	83	12	4	197,00	**12010**
12	1,5	26	11,8	38	38	83	12	4	202,80	**12015**
12	2,0	26	11,8	38	38	83	12	4	202,80	**12020**
12	3,0	26	11,8	38	38	83	12	4	204,40	**12030**
16	1,0	32	15,8	44	44	92	16	4	327,50	**16010**
16	1,5	32	15,8	44	44	92	16	4	334,60	**16015**
16	2,0	32	15,8	44	44	92	16	4	334,60	**16020**
16	3,0	32	15,8	44	44	92	16	4	337,50	**16030**
20	1,5	38	19,8	52	54	104	20	4	501,30	**20015**
20	2,0	38	19,8	52	54	104	20	4	501,30	**20020**
20	3,0	38	19,8	52	54	104	20	4	504,20	**20030**

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 480–483

End milling cutter

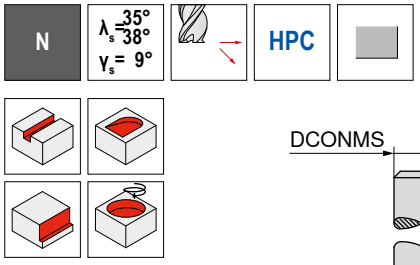

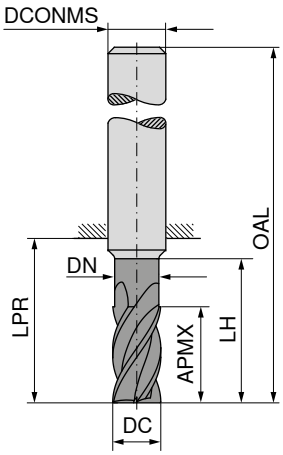

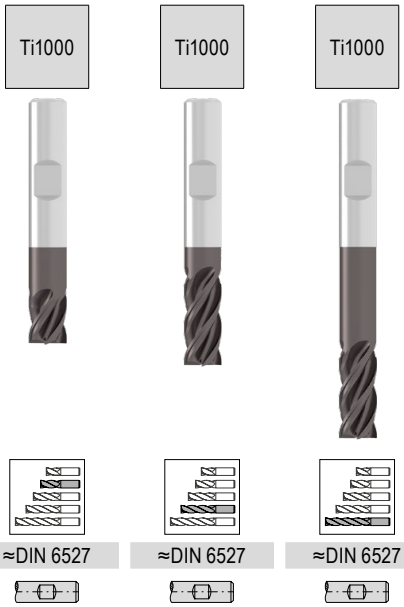

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 070 ... EUR V3/5C		54 070 ... EUR V3/5C		54 070 ... EUR V3/5C	
3	5			14	50	6	4	18,70	03100				
3	8	2,8	13	21	57	6	4			18,70	03200		
3	8	2,8	15	22	69	6	4					26,44	03400
4	8			18	54	6	4	18,70	04100				
4	11	3,8	17	21	57	6	4			18,70	04200		
4	11	3,8	20	26	69	6	4					26,44	04400
5	9			18	54	6	4	18,70	05100				
5	13	4,8	19	21	57	6	4			18,70	05200		
5	13	4,8	25	34	69	6	4					29,73	05400
6	10			18	54	6	4	18,70	06100				
6	13	5,8	19	21	57	6	4			21,86	06200		
6	13	5,8	30	34	69	6	4					33,22	06400
8	12			22	58	8	4	26,33	08100				
8	17	7,7	40	44	79	8	4					42,15	08400
8	21	7,7	25	27	63	8	4			28,26	08200		
10	14			26	66	10	4	34,18	10100				
10	21	9,7	50	54	93	10	4					58,69	10400
10	22	9,7	30	32	72	10	4			37,22	10200		
12	16			28	73	12	4	49,16	12100				
12	25	11,6	60	64	108	12	4					72,35	12400
12	26	11,6	36	38	83	12	4			59,06	12200		
16	22			34	82	16	4	86,11	16100				
16	32	15,5	42	44	92	16	4			90,95	16200		
16	33	15,5	80	84	132	16	4					136,50	16400
20	26			42	92	20	4	128,00	20100				
20	38	19,5	52	54	104	20	4			137,80	20200		
20	42	19,5	100	104	154	20	4					187,30	20400
P								●		●		●	
M								●		●		○	
K								●		●		●	
N								○		○			
S								○		○			
H													
O													

→ v_c/f_z Page 462–467

End milling cutter

N | λ_s 35° 38° | γ_s 9° | HPC



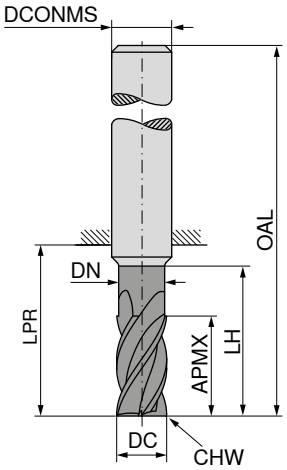





≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	54 071 ... EUR V3/5C		54 071 ... EUR V3/5C		54 071 ... EUR V3/5C	
3	5			14	50	6	0,1	4	18,70	03100				
3	8	2,8	13	21	57	6	0,1	4			18,70	03200		
3	8	2,8	15	22	69	6	0,1	4					26,44	03400
4	8			18	54	6	0,1	4	18,70	04100				
4	11	3,8	17	21	57	6	0,1	4			18,70	04200		
4	11	3,8	20	26	69	6	0,1	4					26,44	04400
5	9			18	54	6	0,1	4	18,70	05100				
5	13	4,8	19	21	57	6	0,1	4			18,70	05200		
5	13	4,8	25	34	69	6	0,1	4					29,73	05400
6	10			18	54	6	0,1	4	18,70	06100				
6	13	5,8	19	21	57	6	0,1	4			21,99	06200		
6	13	5,8	30	34	69	6	0,1	4					33,22	06400
8	12			22	58	8	0,2	4	26,44	08100				
8	17	7,7	40	44	79	8	0,2	4					42,15	08400
8	21	7,7	25	27	63	8	0,2	4			28,39	08200		
10	14			26	66	10	0,2	4	34,31	10100				
10	21	9,7	50	54	93	10	0,2	4					58,69	10400
10	22	9,7	30	32	72	10	0,2	4			37,22	10200		
12	16			28	73	12	0,3	4	49,29	12100				
12	25	11,6	60	64	108	12	0,3	4					72,35	12400
12	26	11,6	36	38	83	12	0,3	4			59,18	12200		
16	22			34	82	16	0,3	4	86,24	16100				
16	33	15,5	80	84	132	16	0,3	4					136,50	16400
16	36	15,5	42	44	92	16	0,3	4			91,30	16200		
20	26			42	92	20	0,3	4	128,00	20100				
20	41	19,5	52	54	104	20	0,3	4			137,80	20200		
20	42	19,5	100	104	154	20	0,3	4					187,30	20400

P	●	●	●
M	●	●	○
K	●	●	●
N	○	○	
S	○	○	
H			
O			

14

→ v_c/f_z Page 462–467

End milling cutter

▲ Cutting depth: 3 x DC

N | λ_s = 35° 36° | γ_s = 9° | HPC



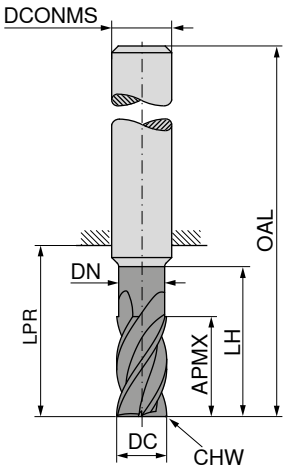

NEW

Ti1000

≈DIN 6527

54 078 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V3/5C	
6	19	5,8	24	26	62	6	0,1	4	28,20	**06200**
8	25	7,7	30	32	68	8	0,2	4	36,42	**08200**
10	31	9,7	38	40	80	10	0,2	4	47,73	**10200**
12	37	11,6	46	48	93	12	0,2	4	75,88	**12200**
16	49	15,5	58	60	108	16	0,3	4	117,10	**16200**
20	61	19,5	74	76	126	20	0,3	4	176,70	**20200**

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c/f_z Page 464+465

End milling cutter with corner radius





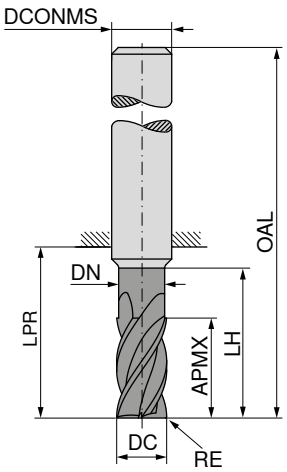



≈DIN 6527

≈DIN 6527

DC h10 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 072 ... EUR V3/5C		54 072 ... EUR V3/5C	
3	0,1	8	2,8	13	21	57	6	4	24,51	03201		
3	0,3	8	2,8	13	21	57	6	4	24,51	03203		
3	0,5	8	2,8	13	21	57	6	4	24,51	03205		
3	1,0	8	2,8	13	21	57	6	4	24,51	03210		
3	0,5	8	2,8	15	22	69	6	4			32,25	03405
3	0,3	8	2,8	15	22	69	6	4			32,25	03403
3	1,0	8	2,8	15	22	69	6	4			32,25	03410
4	0,1	11	3,8	17	21	57	6	4	24,51	04201		
4	0,3	11	3,8	17	21	57	6	4	24,51	04203		
4	0,5	11	3,8	17	21	57	6	4	24,51	04205		
4	1,0	11	3,8	17	21	57	6	4	24,51	04210		
4	0,5	11	3,8	20	26	69	6	4			32,25	04405
4	0,3	11	3,8	20	26	69	6	4			32,25	04403
4	1,0	11	3,8	20	26	69	6	4			32,25	04410
5	0,5	13	4,8	19	21	57	6	4	24,51	05205		
5	0,1	13	4,8	19	21	57	6	4	24,51	05201		
5	0,3	13	4,8	19	21	57	6	4	24,51	05203		
5	1,0	13	4,8	19	21	57	6	4	24,51	05210		
5	0,5	13	4,8	25	34	69	6	4			35,52	05405
5	0,3	13	4,8	25	34	69	6	4			35,52	05403
5	1,0	13	4,8	25	34	69	6	4			35,52	05410
6	0,3	13	5,8	19	21	57	6	4	27,07	06203		
6	0,1	13	5,8	19	21	57	6	4	27,07	06201		
6	0,5	13	5,8	19	21	57	6	4	27,07	06205		
6	1,0	13	5,8	19	21	57	6	4	27,07	06210		
6	1,5	13	5,8	19	21	57	6	4	27,07	06215		
6	2,0	13	5,8	19	21	57	6	4	27,07	06220		
6	1,0	13	5,8	30	34	69	6	4			39,97	06410
6	0,3	13	5,8	30	34	69	6	4			39,97	06403
6	0,5	13	5,8	30	34	69	6	4			39,97	06405
6	1,5	13	5,8	30	34	69	6	4			39,97	06415
6	2,0	13	5,8	30	34	69	6	4			39,97	06420
8	0,5	17	7,7	40	44	79	8	4			53,36	08405
8	0,3	17	7,7	40	44	79	8	4			53,36	08403
8	1,0	17	7,7	40	44	79	8	4			53,36	08410
8	1,5	17	7,7	40	44	79	8	4			53,36	08415
8	2,0	17	7,7	40	44	79	8	4			53,36	08420
8	0,1	21	7,7	25	27	63	8	4	35,52	08201		
8	0,3	21	7,7	25	27	63	8	4	35,52	08203		
8	0,5	21	7,7	25	27	63	8	4	35,52	08205		
8	1,0	21	7,7	25	27	63	8	4	35,52	08210		

P	●	●
M	●	○
K	●	●
N	○	
S	○	
H		
O		

→ v_c/f_z Page 462–467

14

Continued on next page

End milling cutter with corner radius

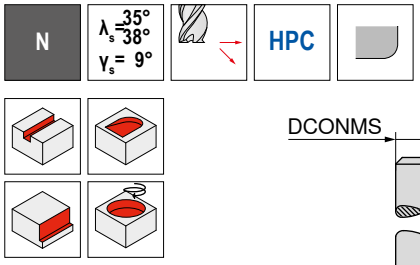

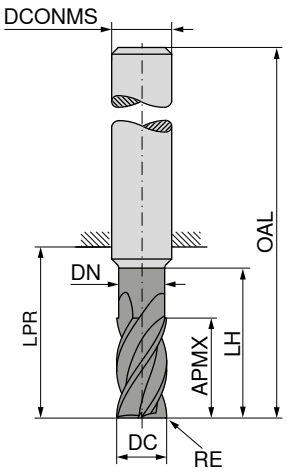





≈DIN 6527

≈DIN 6527

DC h10 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 072 ... EUR V3/5C		54 072 ... EUR V3/5C	
8	1,5	21	7,7	25	27	63	8	4	35,52	08215		
8	2,0	21	7,7	25	27	63	8	4	35,52	08220		
10	1,0	21	9,7	50	54	93	10	4			71,25	10410
10	0,3	21	9,7	50	54	93	10	4			71,25	10403
10	0,5	21	9,7	50	54	93	10	4			71,25	10405
10	1,5	21	9,7	50	54	93	10	4			71,25	10415
10	2,0	21	9,7	50	54	93	10	4			71,25	10420
10	0,5	22	9,7	30	32	72	10	4	44,81	10205		
10	0,1	22	9,7	30	32	72	10	4	44,81	10201		
10	0,3	22	9,7	30	32	72	10	4	44,81	10203		
10	1,0	22	9,7	30	32	72	10	4	44,81	10210		
10	1,5	22	9,7	30	32	72	10	4	44,81	10215		
10	2,0	22	9,7	30	32	72	10	4	44,81	10220		
12	1,5	25	11,6	60	64	108	12	4			104,20	12415
12	0,3	25	11,6	60	64	108	12	4			104,20	12403
12	0,5	25	11,6	60	64	108	12	4			104,20	12405
12	1,0	25	11,6	60	64	108	12	4			104,20	12410
12	2,0	25	11,6	60	64	108	12	4			104,20	12420
12	3,0	25	11,6	60	64	108	12	4			104,20	12430
12	0,3	26	11,6	36	38	83	12	4	69,33	12203		
12	0,1	26	11,6	36	38	83	12	4	69,33	12201		
12	0,5	26	11,6	36	38	83	12	4	69,33	12205		
12	1,0	26	11,6	36	38	83	12	4	69,33	12210		
12	1,5	26	11,6	36	38	83	12	4	69,33	12215		
12	2,0	26	11,6	36	38	83	12	4	69,33	12220		
12	3,0	26	11,6	36	38	83	12	4	69,33	12230		
16	1,5	33	15,5	80	84	132	16	4			162,00	16415
16	0,3	33	15,5	80	84	132	16	4			162,00	16403
16	0,5	33	15,5	80	84	132	16	4			162,00	16405
16	1,0	33	15,5	80	84	132	16	4			162,00	16410
16	2,0	33	15,5	80	84	132	16	4			162,00	16420
16	3,0	33	15,5	80	84	132	16	4			162,00	16430
16	4,0	33	15,5	80	84	132	16	4			162,00	16440
16	0,3	36	15,5	42	44	92	16	4	104,70	16203		
16	0,1	36	15,5	42	44	92	16	4	104,70	16201		
16	0,5	36	15,5	42	44	92	16	4	104,70	16205		
16	1,0	36	15,5	42	44	92	16	4	104,70	16210		
16	1,5	36	15,5	42	44	92	16	4	104,70	16215		
16	2,0	36	15,5	42	44	92	16	4	104,70	16220		
16	3,0	36	15,5	42	44	92	16	4	104,70	16230		
16	4,0	36	15,5	42	44	92	16	4	104,70	16240		

P	●	●
M	●	○
K	●	●
N	○	
S	○	
H		
O		

→ v_c/f_z Page 462–467

Continued on next page

End milling cutter with corner radius

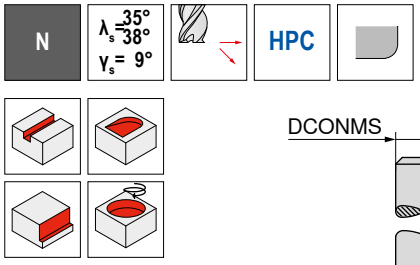

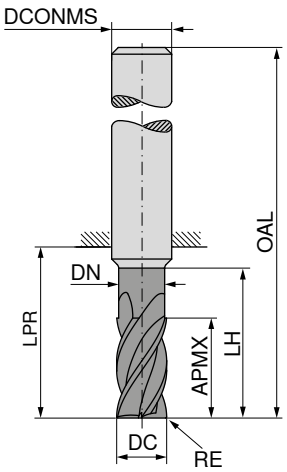





≈DIN 6527

≈DIN 6527

DC h10 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	54 072 ... EUR V3/5C		54 072 ... EUR V3/5C	
20	0,1	41	19,5	52	54	104	20	4	152,10	**20201**		
20	0,3	41	19,5	52	54	104	20	4	152,10	**20203**		
20	0,5	41	19,5	52	54	104	20	4	152,10	**20205**		
20	1,0	41	19,5	52	54	104	20	4	152,10	**20210**		
20	1,5	41	19,5	52	54	104	20	4	152,10	**20215**		
20	2,0	41	19,5	52	54	104	20	4	152,10	**20220**		
20	3,0	41	19,5	52	54	104	20	4	152,10	**20230**		
20	4,0	41	19,5	52	54	104	20	4	152,10	**20240**		
20	1,5	42	19,5	100	104	154	20	4			238,00	**20415**
20	0,3	42	19,5	100	104	154	20	4			238,00	**20403**
20	0,5	42	19,5	100	104	154	20	4			238,00	**20405**
20	1,0	42	19,5	100	104	154	20	4			238,00	**20410**
20	2,0	42	19,5	100	104	154	20	4			238,00	**20420**
20	3,0	42	19,5	100	104	154	20	4			238,00	**20430**
20	4,0	42	19,5	100	104	154	20	4			238,00	**20440**

P	●	●
M	●	○
K	●	●
N	○	
S	○	
H		
O		

→ v_c/f_z Page 462–467

14

Finish milling cutter

N | λ_s=48° γ_s=50° γ_s=13° | HPC

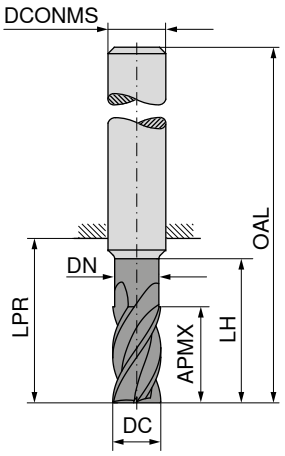

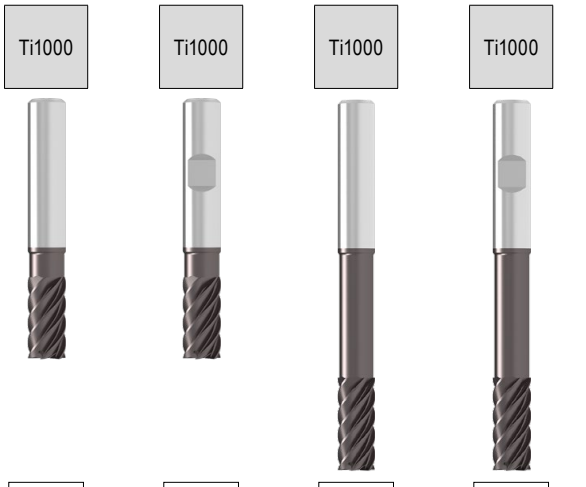

≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527 | ≈DIN 6527

DC $_{h10}$ mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	54 076 ... EUR V3/5C		54 075 ... EUR V3/5C		54 076 ... EUR V3/5C		54 075 ... EUR V3/5C	
6	13	5,6	19	21	57	6	6	27,34	**06200**	27,34	**06200**				
6	15	5,6	42	44	80	6	6					41,51	**06400**	41,51	**06400**
8	19	7,6	25	27	63	8	6	35,32	**08200**	35,32	**08200**				
8	20	7,6	62	64	100	8	6					52,69	**08400**	52,69	**08400**
10	22	9,6	30	32	72	10	6	46,53	**10200**	46,53	**10200**				
10	25	9,6	58	60	100	10	6					73,37	**10400**	73,37	**10400**
12	26	11,5	36	38	83	12	6	73,82	**12200**	73,82	**12200**				
12	30	11,5	73	75	120	12	6					90,44	**12400**	90,44	**12400**
16	32	15,0	42	44	92	16	6	113,70	**16200**	113,70	**16200**				
16	40	15,0	100	102	150	16	6					170,70	**16400**	170,70	**16400**
20	38	19,0	52	54	104	20	6	172,20	**20200**	172,20	**20200**				
20	50	19,0	98	100	150	20	6					234,20	**20400**	234,20	**20400**

P	●	●	●	●
M	●	●	●	●
K	○	○	○	○
N	○	○	○	○
S	○	○	○	○
H				
O				

→ v_c/f_z Page 468

Finish milling cutter



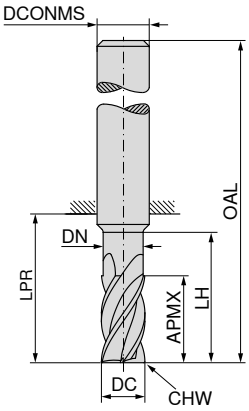

LPR with Shank DIN 6535 HB

Factory standard | Factory standard | Factory standard

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 010 ... EUR V1/5B		52 015 ... EUR V1/5B		52 018 ... EUR V1/5B	
5	8	4,8	13	18	54	6	0,02	6	46,21	05000				
5	13	4,8	18	22	58	6	0,02	6			47,37	05000		
6	10	5,8	15	18	54	6	0,03	6	45,18	06000				
6	16	5,8	20	22	58	6	0,03	6			45,91	06000		
6	21			29	65	6	0,03	6					65,64	06000
7	12	6,8	17	23	59	8	0,04	6	54,45	07000				
7	22	6,8	30	34	70	8	0,04	6			55,64	07000		
7	25			39	75	8	0,04	6					84,01	07000
8	12	7,8	17	23	59	8	0,04	6	53,60	08000				
8	22	7,8	32	34	70	8	0,04	6			57,21	08000		
8	28			39	75	8	0,04	6					75,92	08000
9	14	8,8	19	20	60	10	0,04	6	81,99	09000				
9	25	8,8	33	33	73	10	0,04	6			90,96	09000		
9	30			45	85	10	0,04	6					159,50	09000
10	14	9,8	19	20	60	10	0,05	6	81,27	10000				
10	25	9,8	33	33	73	10	0,05	6			91,68	10000		
10	35			45	85	10	0,05	6					147,70	10000
12	16	11,8	21	25	70	12	0,05	6	117,90	12000				
12	28	11,8	38	39	84	12	0,05	6			127,90	12000		
12	45			55	100	12	0,05	6					207,20	12000
14	18	13,8	23	25	70	14	0,06	6	155,00	14000				
14	30	13,8	38	39	84	14	0,06	6			172,60	14000		
16	20	15,8	28	32	80	16	0,06	8	187,00	16000				
16	35	15,8	43	45	93	16	0,06	8			211,70	16000		
16	50			62	110	16	0,06	8					298,40	16000
16	65			77	125	16	0,06	8					334,60	16100
20	25	19,8	33	35	85	20	0,07	8	289,80	20000				
20	40	19,8	45	50	100	20	0,07	8			330,30	20000		
20	55			65	115	20	0,07	8					444,60	20000
20	70			80	130	20	0,07	8					531,70	20100
25	55	24,8	63	69	125	25	0,08	8			556,40	25000		
25	75			94	150	25	0,08	8					899,50	25000

P	○	○	○
M	●	●	●
K	○	○	○
N	●	●	●
S	●	●	●
H			
O	●	●	●

→ v_c/f_z Page 480–485

Finish milling cutter



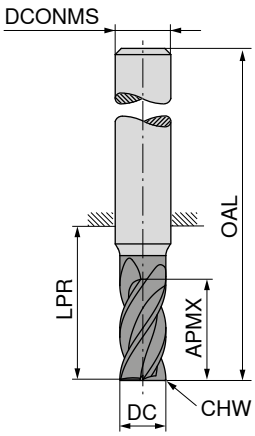

≈DIN 6527

Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	50 633 ... EUR V0/5A		50 633 ... EUR V0/5A	
4	11	21	57	6	0,15	6	55,04	040		
4	16	26	62	6	0,15	6			77,92	041
5	13	21	57	6	0,15	6	55,04	050		
5	18	26	62	6	0,15	6			77,92	051
6	13	21	57	6	0,15	6	55,04	060		
6	18	26	62	6	0,15	6			77,92	061
7	16	27	63	8	0,15	6	67,21	070		
7	21	32	68	8	0,15	6			102,00	071
8	19	27	63	8	0,15	6	64,32	080		
8	24	32	68	8	0,15	6			89,95	081
9	19	32	72	10	0,15	6	106,30	090		
9	27	40	80	10	0,15	6			162,40	091
10	22	32	72	10	0,15	6	103,10	100		
10	30	40	80	10	0,15	6			159,50	101
12	26	38	83	12	0,15	6	137,10	120		
12	36	48	93	12	0,15	6			215,80	121
14	26	38	83	14	0,15	6	187,00	140		
14	42	54	99	14	0,15	6			292,50	141
16	32	44	92	16	0,15	6	246,20	160		
16	48	60	108	16	0,15	6			373,60	161
16	65	77	125	16	0,15	6			470,90	162
16	75	102	150	16	0,15	6			527,20	163
16	95	102	150	16	0,15	6			611,30	164
18	32	44	92	18	0,15	8	285,40	180		
18	54	66	114	18	0,15	8			457,80	181
20	38	54	104	20	0,15	8	350,60	200		
20	60	76	126	20	0,15	8			586,70	201
20	75	85	135	20	0,15	8			619,90	202
20	95	100	150	20	0,15	8			643,10	203
25	75	94	150	25	0,15	8			851,80	250
25	95	104	160	25	0,15	8			906,80	251
32	75	90	150	32	0,15	8	1.637,00	320		
32	95	100	160	32	0,15	8			1.701,00	321

P	○	○
M	●	●
K	●	●
N		
S	○	○
H		
O		

→ v_c/f_z Page 480–485

Finish milling cutter with corner radius



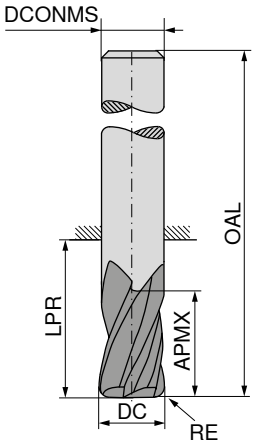

Ti1000

Factory standard

50 634 ...

DC f8 mm	RE ±0,05 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0/5A	
6	0,5	18	26	62	6	6	74,15	**060**
6	1,0	18	26	62	6	6	74,15	**061**
8	0,5	24	32	68	8	6	73,74	**080**
8	1,0	24	32	68	8	6	73,74	**081**
8	2,0	24	32	68	8	6	73,74	**082**
10	0,5	30	40	80	10	6	150,60	**100**
10	1,0	30	40	80	10	6	150,60	**101**
10	2,0	30	40	80	10	6	150,60	**102**
12	0,5	36	48	93	12	6	198,50	**120**
12	1,0	36	48	93	12	6	198,50	**121**
12	2,0	36	48	93	12	6	198,50	**122**
12	3,0	36	48	93	12	6	198,50	**123**
16	0,5	48	60	108	16	6	355,00	**160**
16	1,0	48	60	108	16	6	355,00	**161**
16	2,0	48	60	108	16	6	355,00	**162**
16	3,0	48	60	108	16	6	355,00	**163**
20	0,5	60	76	126	20	8	530,20	**200**
20	1,0	60	76	126	20	8	530,20	**201**
20	2,0	60	76	126	20	8	530,20	**202**
20	3,0	60	76	126	20	8	530,20	**203**

P	○
M	●
K	●
N	
S	○
H	
O	

→ v_c/f_z Page 480–485

Finish milling cutter



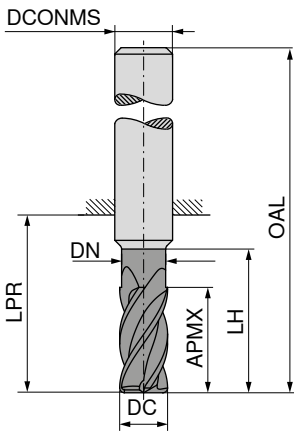

Factory standard

52 109 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
6	16	5,8	26	26	58	6	8	75,03	**060**
8	22	7,8	32	32	64	8	10	85,74	**080**
10	25	9,8	35	35	73	10	12	146,30	**100**
12	28	11,8	38	39	84	12	12	198,50	**120**
16	35	15,8	43	45	93	16	16	424,50	**160**
20	40	19,8	50	54	104	20	16	499,80	**200**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–483

End milling cutter

▲ With graduated flute depth

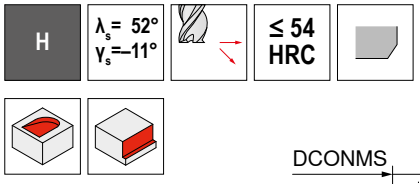

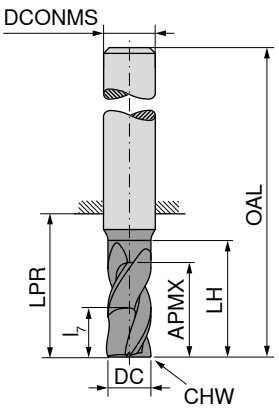

DIN 6527

DIN 6527

DC f8 mm	APMX mm	LH mm	l_7 mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	50 907 ... EUR V0/5A		50 907 ... EUR V0/5A	
4	11	18	4,4	21	57	6	0,15	4	72,45	**041**		
4	16	19	6,4	26	62	6	0,15	4			78,95	**042**
5	13	19	4,8	21	57	6	0,15	4	72,45	**051**		
5	17	20	6,8	26	62	6	0,15	4			78,95	**052**
6	13	19	5,2	21	57	6	0,15	4	76,06	**061**		
6	18	21	7,2	26	62	6	0,15	4			84,33	**062**
8	19	25	7,6	27	63	8	0,15	4	87,51	**081**		
8	24	27	9,6	32	68	8	0,15	4			95,04	**082**
10	22	30	8,8	32	72	10	0,15	4	149,30	**101**		
10	30	33	12,0	40	80	10	0,15	4			169,60	**102**
12	26	36	10,4	38	83	12	0,15	4	204,40	**121**		
12	36	39	14,4	48	93	12	0,15	4			231,70	**122**
16	32	42	12,8	44	92	16	0,15	4	360,80	**161**		
16	48	51	19,2	60	108	16	0,15	4			436,10	**162**
20	38	52	15,2	54	104	20	0,15	4	517,20	**201**		
20	60	63	24,0	76	126	20	0,15	4			649,00	**202**
P										●		●
M												
K												
N												
S												
H										●		●
O												

→ v_c/f_z Page 480–485

Finish milling cutter

H | λ_s=50° γ_s=–5° | ≤ 68 HRC

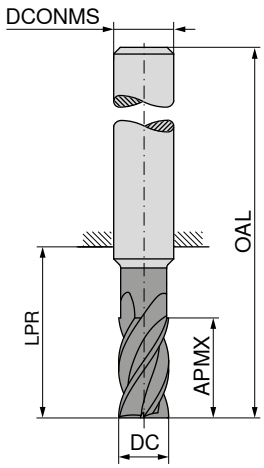





DIN 6527

Factory standard

DC f8 mm	APMX mm	OAL mm	DCONMS h5 mm	ZEFP	50 635 ... EUR V0/5A		50 635 ... EUR V0/5A	
4	11	57	6	6	51,42	040		
4	16	62	6	6			58,54	041
5	13	57	6	6	48,09	050		
5	18	62	6	6			55,77	051
6	13	57	6	6	54,16	060		
6	18	62	6	6			61,73	061
8	19	63	8	6	61,73	080		
8	24	68	8	6			71,73	081
10	22	72	10	6	106,00	100		
10	30	80	10	6			121,70	101
12	26	83	12	6	144,00	120		
12	36	93	12	6			168,00	121
16	32	92	16	8	256,50	160		
16	48	108	16	8			314,30	161
16	90	150	16	8			334,60	162
20	38	104	20	8	366,40	200		
20	60	126	20	8			467,90	201
20	75	135	20	8			420,10	202
20	95	150	20	8			489,50	203
25	75	150	25	8	1.160,00	250		
25	95	160	25	8			1.201,00	251

P	●	●
M	●	●
K	○	○
N	○	○
S	●	●
H	●	●
O	●	●

→ v_c/f_z Page 480–485

Finish milling cutter



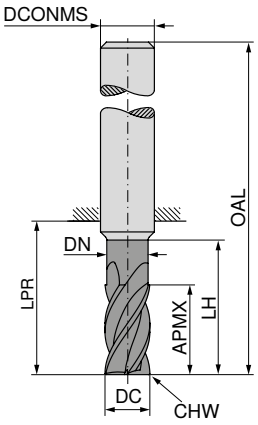

LPR with Shank DIN 6535 HB

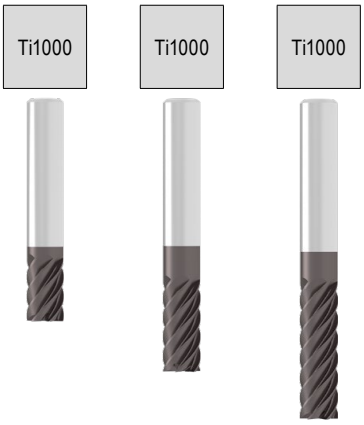

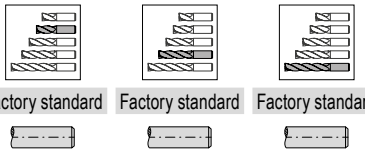

									Factory standard		Factory standard		Factory standard			
									52 112 ...		52 122 ...		52 123 ...			
DC e8	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	EUR		EUR		EUR			
mm	mm	mm	mm	mm	mm	mm	mm		V1		V1		V1			
5	8	4,8	13	18	54	6	0,02	6	68,81	051						
5	13	4,8	18	22	58	6	0,02	6			72,28	051				
6	10	5,8	15	18	54	6	0,03	6	64,46	061						
6	16	5,8	20	22	58	6	0,03	6			70,70	061				
6	21			29	65	6	0,03	6					96,63	061		
8	12	7,8	17	23	59	8	0,04	6	79,83	081						
8	22	7,8	32	34	70	8	0,04	6			88,37	081				
8	28			39	75	8	0,04	6					120,20	081		
10	14	9,8	19	20	60	10	0,05	6	117,90	101						
10	25	9,8	33	33	73	10	0,05	6			136,70	101				
10	35			45	85	10	0,05	6					217,40	101		
12	16	11,8	21	25	70	12	0,05	6	175,30	121						
12	28	11,8	38	39	84	12	0,05	6			184,00	121				
12	45			55	100	12	0,05	6					302,80	121		
16	20	15,8	28	32	80	16	0,06	6	266,50	161						
16	35	15,8	43	45	93	16	0,06	6			304,30	161				
16	50			62	110	16	0,06	6					446,40	162		
16	65			77	125	16	0,06	6					502,60	163		
20	25	19,8	33	35	85	20	0,07	8	404,20	201						
20	40	19,8	45	50	100	20	0,07	8			451,90	201				
20	55			65	115	20	0,07	8					634,50	202		
20	70			80	130	20	0,07	8					778,00	203		
25	55	24,8	63	69	125	25	0,08	8			753,30	251				
25	75			94	150	25	0,08	8					1.240,00	251		

P	○	○	○
M	●	●	●
K	○	○	○
N	●	●	●
S	●	●	●
H			
O	●	●	●

→ v_c/f_z Page 480–485

Roughing-Finishing Cutter

▲ With rough-finishing profile



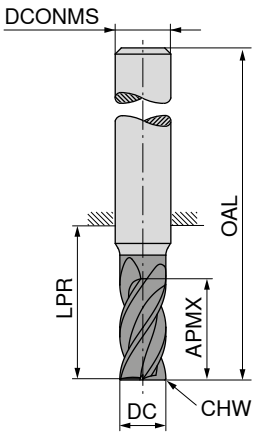

DIN 6527

50 628 ...

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	EUR V0/5A	
5	15	21	57	6	0,25	4	101,40	**050**
6	16	21	57	6	0,25	4	101,40	**060**
8	22	27	63	8	0,25	4	126,30	**080**
10	25	32	72	10	0,25	4	135,90	**100**
12	28	38	83	12	0,25	4	168,00	**120**
16	35	44	92	16	0,25	4	260,60	**160**
20	40	54	104	20	0,25	4	392,70	**200**

P	
M	
K	
N	●
S	○
H	
O	●

→ v_c/f_z Page 480–483

Roughing-Finishing Cutter

▲ With trapezoidal cord profile



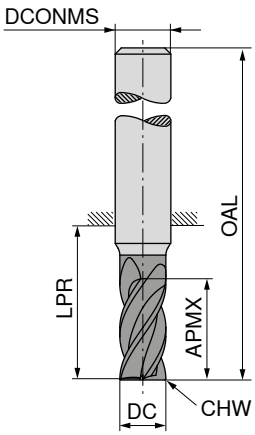



DIN 6527

52 318 ...

DC h10 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1	
6	13	21	57	6		3	81,54	**06000**
8	19	27	63	8	0,08	3	101,10	**08000**
10	22	32	72	10	0,12	4	110,40	**10000**
12	26	38	83	12	0,15	4	138,70	**12000**
14	26	38	83	14	0,17	4	176,70	**14000**
16	32	44	92	16	0,20	4	208,50	**16000**
18	32	48	92	18	0,22	4	285,40	**18000**
20	38	54	104	20	0,25	4	315,70	**20000**

P	●
M	○
K	●
N	○
S	
H	
O	

→ v_c/f_z Page 470+471

Rough milling cutter

▲ With roughing profile

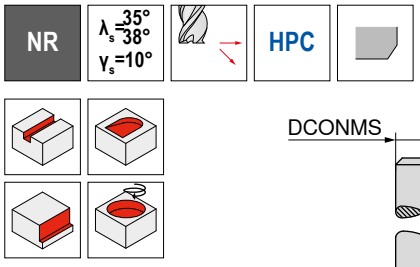

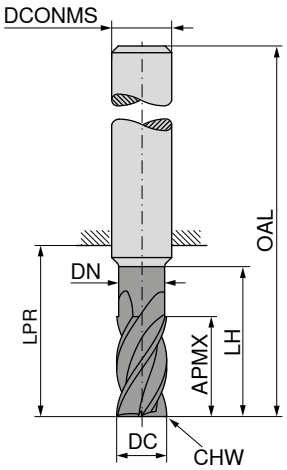

Ti1000

≈DIN 6527

54 077 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V3/5C	
4	11	3,8	17	21	57	6	0,1	4	26,77	**00400**
5	13	4,8	19	21	57	6	0,1	4	26,77	**00500**
6	13	5,8	19	21	57	6	0,1	4	32,06	**00600**
8	21	7,7	25	27	63	8	0,2	4	40,08	**00800**
10	22	9,7	30	32	72	10	0,2	4	51,08	**01000**
12	26	11,6	36	38	83	12	0,3	4	82,84	**01200**
16	36	15,5	42	44	92	16	0,3	4	124,80	**01600**
20	41	19,5	52	54	104	20	0,3	4	184,90	**02000**

P	●
M	●
K	●
N	○
S	○
H	
O	

→ v_c/f_z Page 472+473

Rough milling cutter

▲ With roughing profile



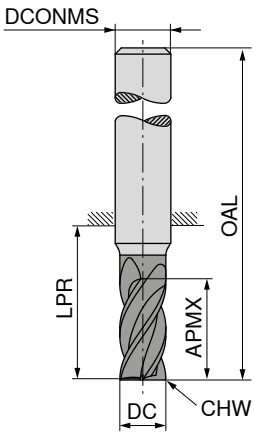





DIN 6527

DIN 6527

DC d11 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	CHW mm	ZEFP	50 618 ... EUR V0/5A		50 624 ... EUR V0/5A	
4	8	21	57	6	0,6	4			96,03	040
5	8	18	54	6	0,6	4	101,00	050		
5	13	21	57	6	0,6	4			96,03	050
6	8	18	54	6	0,6	4	90,24	060		
6	13	21	57	6	0,6	4			104,30	060
7	11	22	58	8	0,6	4	121,50	070		
7	19	27	63	8	0,6	4			118,90	070
8	11	22	58	8	0,6	4	110,40	080		
8	19	27	63	8	0,6	4			118,90	080
9	13	26	66	10	0,6	4	138,60	090		
9	22	32	72	10	0,6	4			138,10	090
10	13	26	66	10	0,6	4	138,60	100		
10	22	32	72	10	0,6	4			138,10	100
11	26	38	83	12	0,6	4			163,70	110
12	16	28	73	12	0,6	4	152,20	120		
12	26	38	83	12	0,6	4			163,70	120
13	26	38	83	14	0,6	4			230,30	130
14	16	31	76	14	0,6	4	210,20	140		
14	26	38	83	14	0,6	4			230,30	140
16	19	34	82	16	0,6	4	259,40	160		
16	32	44	92	16	0,6	4			259,40	160
18	19	36	84	18	0,6	4	311,60	180		
18	32	44	92	18	0,6	4			347,70	180
20	19	42	92	20	0,6	4	372,40	200		
20	38	54	104	20	0,6	4			386,80	200
25	45	65	121	25	0,6	5			473,60	250

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H		
O	○	○

→ v_c/f_z Page 480–483

Rough milling cutter

▲ With roughing profile

NR

λ_s=45°
γ_s=11°



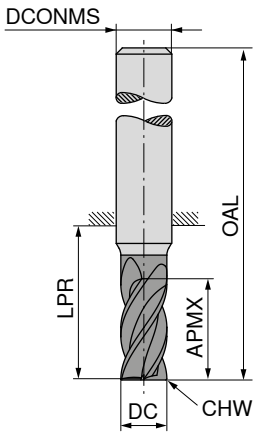

Ti400

DIN 6527

50 637 ...

DC $_{d11}$ mm	APMX mm	LPR mm	OAL mm	DCONMS $_{h5}$ mm	CHW mm	ZEFP	EUR V0/5A	
6	13	21	57	6	0,5	4	109,90	**060**
8	19	27	63	8	0,5	4	126,00	**080**
10	22	32	72	10	0,5	4	137,60	**100**
12	26	38	83	12	0,5	4	163,70	**120**
14	26	38	83	14	0,5	4	230,30	**140**
16	32	44	92	16	0,5	5	259,40	**160**
18	32	44	92	18	0,5	5	349,10	**180**
20	38	54	104	20	0,5	6	388,30	**200**
25	45	65	121	25	0,5	6	478,20	**250**

P	○
M	●
K	○
N	○
S	●
H	
O	○

→ v_c/f_z Page 480–483

Rough milling cutter

▲ With round cord profile
▲ With integrated chip breakers in the flutes





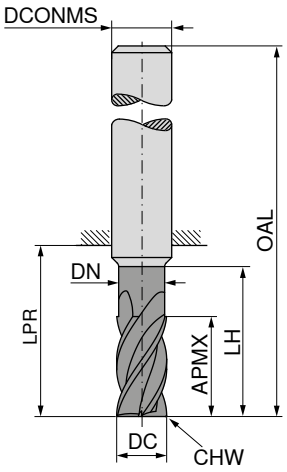

Ti1000

Factory standard

52 341 ...

DC h11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V1	
6	16	5,8	21	22	58	6	0,15	4	122,30	**060**
8	22	7,7	27	34	70	8	0,20	4	139,90	**080**
10	25	9,7	30	33	73	10	0,20	4	152,20	**100**
12	28	11,6	38	39	84	12	0,25	4	178,10	**120**
14	30	13,6	40	39	84	14	0,30	4	240,60	**140**
16	35	15,5	45	45	93	16	0,35	5	307,10	**160**
18	35	17,5	45	45	93	18	0,40	5	382,50	**180**
20	40	19,5	55	54	104	20	0,40	5	459,10	**200**

P	○
M	●
K	○
N	
S	
H	
O	

→ v_c/f_z Page 474+475

Rough milling cutter

▲ With round cord profile
▲ With integrated chip breakers in the flutes

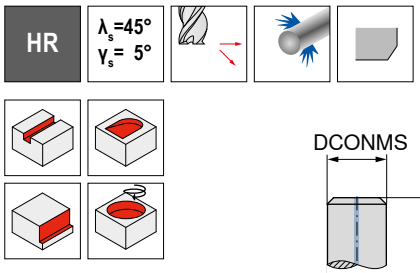

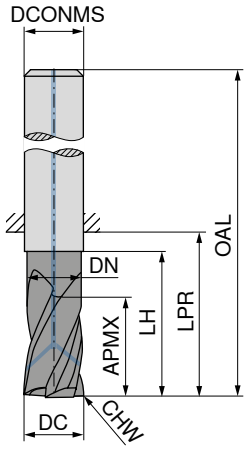

DC h11 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 338 ... EUR V1		52 339 ... EUR V1	
6	16	5,8	21	22	58	6	0,15	4	152,20	**060**	152,20	**060**
8	22	7,7	27	34	70	8	0,20	4	169,60	**080**	169,60	**080**
10	25	9,7	30	33	73	10	0,20	4	198,50	**100**	198,50	**100**
12	28	11,6	38	39	84	12	0,25	4	250,60	**120**	250,60	**120**
16	35	15,5	45	45	93	16	0,35	5	426,00	**160**	426,00	**160**
20	40	19,5	55	54	104	20	0,40	5	627,40	**200**	627,40	**200**

P	●	●
M	●	●
K	●	●
N		
S		
H		
O		

→ v_c/f_z Page 474+475

Rough milling cutter

▲ With round cord profile
▲ With integrated chip breakers in the flutes



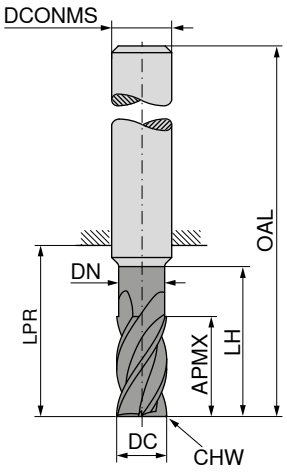

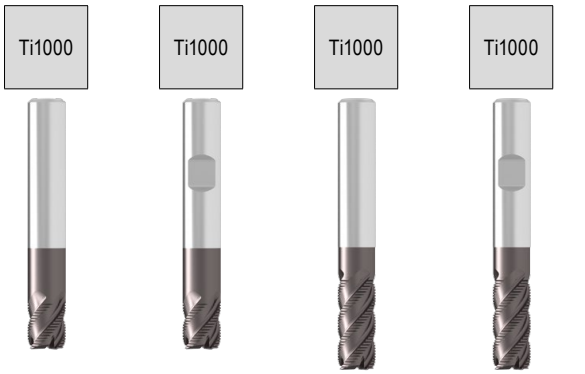

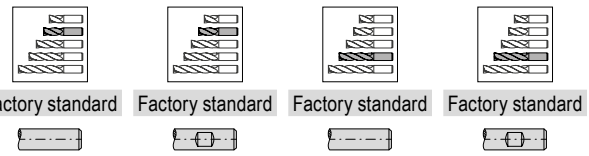

Factory standard | Factory standard | Factory standard | Factory standard

DC h11	APMX	DN	LH	LPR	OAL	DCONMS h6	CHW	ZEFP	52 342 ... EUR V1		52 343 ... EUR V1		52 342 ... EUR V1		52 343 ... EUR V1	
mm	mm	mm	mm	mm	mm	mm	mm									
6	8	6,0		18	54	6	0,15	4	107,80	060	107,80	060				
6	16	5,8	21	22	58	6	0,15	4					119,50	061	119,50	061
8	11	8,0		23	59	8	0,20	4	123,70	080	123,70	080				
8	22	7,7	27	34	70	8	0,20	4					136,90	081	136,90	081
10	13	10,0		27	67	10	0,20	4	132,30	100	132,30	100				
10	25	9,7	30	33	73	10	0,20	4					147,70	101	147,70	101
12	16	12,0		29	74	12	0,25	4	153,50	120	153,50	120				
12	28	11,6	38	39	84	12	0,25	4					173,90	121	173,90	121
14	16	14,0		30	75	14	0,25	4	211,70	140	211,70	140				
14	30	13,5	40	39	84	14	0,25	4					233,30	141	233,30	141
16	19	16,0		36	84	16	0,35	5	263,60	160	263,60	160				
16	35	15,5	45	45	93	16	0,35	5					299,80	161	299,80	161
20	19	20,0		43	93	20	0,40	5	404,20	200	404,20	200				
20	40	19,5	55	54	104	20	0,40	5					450,50	201	450,50	201
25	50	24,0	65	69	125	25	0,50	5					761,90	251	761,90	251
P										●		●		●		●
M										○		○		○		○
K										●		●		●		●
N																
S																
H																
O																

→ v_c/f_z Page 474+475

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm
▲ For Ø DC ≤ 5.0 mm, angle tolerance α and β: ± 0.5°



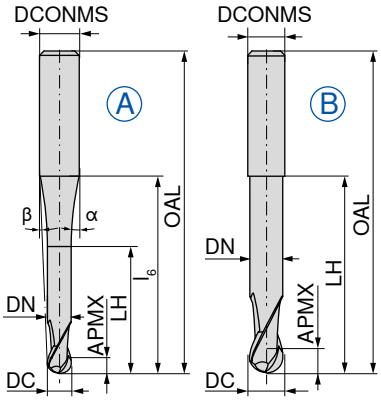

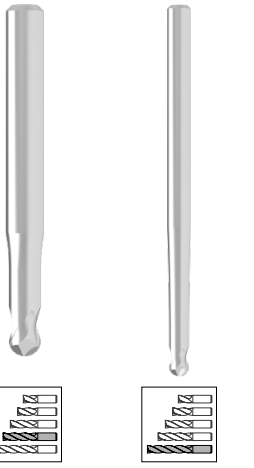

Factory standard | Factory standard

DC ±0,01 mm	APMX mm	DN mm	LH mm	l6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 718 ... EUR V1		52 720 ... EUR V1	
0,5	1,0	0,45	2,0	9	38	10	8	3	2	A	162,40	**005**		
1,0	2,0	0,95	4,0	9	38	12,5	6,5	3	2	A	147,70	**010**		
1,5	2,5	1,40	7,5	9	38	32	5	3	2	A	130,80	**015**		
2,0	3,0	1,80	8,0	9	38	31	3,5	3	2	A	101,70	**020**		
3,0	3,5	2,80	10,0	20	57	11,5	5	6	2	A	97,64	**030**		
3,0	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A			120,40	**030**
4,0	4,0	3,80	12,0	20	57	11	3,5	6	2	A	95,32	**040**		
4,0	4,0	3,80	20,0	40	80	4	1,5	6	2	A			107,80	**040**
5,0	5,0	4,70	10,0	40	100	1,5	1	6	2	A			105,50	**050**
5,0	5,0	4,70	14,0	20	57	10	2	6	2	A	92,85	**050**		
6,0	6,0	5,60	20,0		57			6	2	B	85,18	**060**		
6,0	6,0	5,60	40,0		100			6	2	B			104,00	**060**
8,0	7,0	7,60	25,0		63			8	2	B	115,30	**080**		
8,0	7,0	7,60	60,0		120			8	2	B			134,60	**080**
10,0	8,0	9,60	30,0		72			10	2	B	182,40	**100**		
10,0	8,0	9,60	60,0		120			10	2	B			187,00	**100**
12,0	8,0	11,50	40,0		83			12	2	B	218,80	**120**		
12,0	10,0	11,50	70,0		160			12	2	B			289,80	**120**

P		
M		
K		
N	●	●
S	○	○
H		
O	●	●

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm



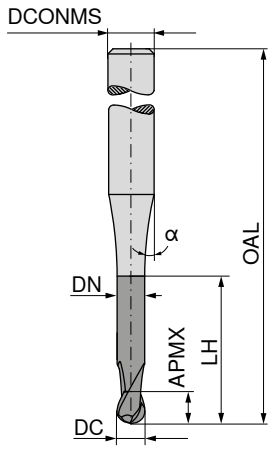

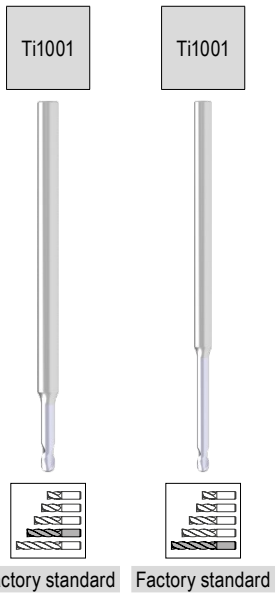

DC f8	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	50 903 ... EUR V0/5A		50 903 ... EUR V0/5A	
mm	mm	mm	mm	mm		mm					
0,2	0,2	0,18	0,6	55	15	3	2	99,08	**021**		
0,2	0,2	0,18	1,0	55	15	3	2	100,10	**022**		
0,2	0,2	0,18	1,6	55	15	3	2	101,00	**023**		
0,2	0,2	0,18	2,0	55	15	3	2	102,60	**024**		
0,3	0,3	0,28	0,9	55	15	3	2	99,08	**031**		
0,3	0,3	0,28	1,5	55	15	3	2	100,10	**032**		
0,3	0,3	0,28	2,4	55	15	3	2	101,00	**033**		
0,3	0,3	0,28	3,0	55	15	3	2	102,60	**034**		
0,4	0,4	0,37	1,2	55	15	3	2	99,08	**041**		
0,4	0,4	0,37	2,0	55	15	3	2	100,10	**042**		
0,4	0,4	0,37	3,2	55	15	3	2	101,00	**043**		
0,4	0,4	0,37	4,0	55	15	3	2	102,60	**044**		
0,5	0,5	0,45	1,5	55	15	3	2	96,93	**051**		
0,5	0,5	0,45	2,5	55	15	3	2	97,77	**052**		
0,5	0,5	0,45	4,0	55	15	3	2	99,08	**053**		
0,5	0,5	0,45	5,0	55	15	3	2	100,10	**054**		
0,6	0,6	0,58	2,0	55	15	3	2	83,42	**061**		
0,6	0,6	0,58	3,0	55	15	3	2	81,12	**062**		
0,6	0,6	0,58	5,0	65	15	3	2			88,50	**063**
0,6	0,6	0,58	6,0	65	15	3	2			93,86	**064**
0,8	0,8	0,77	2,5	55	15	3	2	81,12	**081**		
0,8	0,8	0,77	4,0	55	15	3	2	81,12	**082**		
0,8	0,8	0,77	6,5	65	15	3	2			90,24	**083**
0,8	0,8	0,77	8,0	65	15	3	2			93,86	**084**
1,0	1,0	0,95	3,0	55	15	3	2	81,12	**101**		
1,0	1,0	0,95	5,0	55	15	3	2	81,12	**102**		
1,0	1,0	0,95	8,0	65	15	3	2			85,74	**103**
1,0	1,0	0,95	10,0	65	15	3	2			93,86	**104**
1,0	1,0	0,95	12,0	65	15	3	2			96,03	**105**
1,2	1,2	1,15	3,0	55	15	3	2	81,12	**121**		
1,2	1,2	1,15	6,0	55	15	3	2	81,12	**122**		
1,2	1,2	1,15	10,0	65	15	3	2			90,24	**123**
1,2	1,2	1,15	12,0	65	15	3	2			93,86	**124**
1,3	1,3	1,25	4,0	55	15	3	2	81,12	**131**		
1,3	1,3	1,25	7,0	55	15	3	2	81,12	**132**		
1,3	1,3	1,25	11,0	65	15	3	2			90,24	**133**
1,3	1,3	1,25	13,0	65	15	3	2			93,86	**134**
1,5	1,5	1,44	5,0	55	15	3	2	83,42	**151**		
1,5	1,5	1,44	7,5	55	15	3	2	81,12	**152**		

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

W | λ_s=45° γ_s=18°



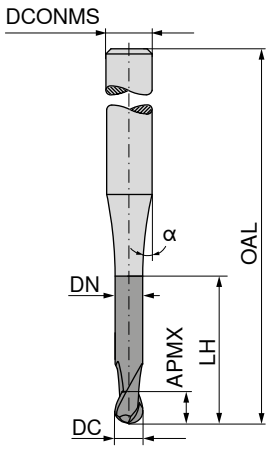

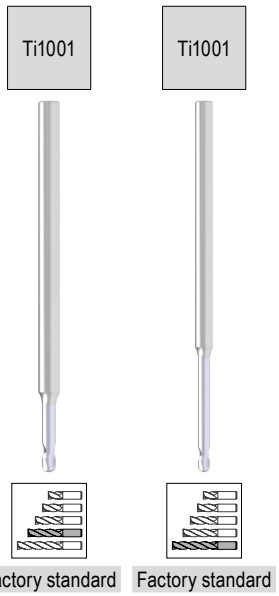

DC f8 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 903 ... EUR V0/5A		50 903 ... EUR V0/5A	
1,5	1,5	1,44	12,0	65	15	3	2			93,86	154
1,5	1,5	1,44	15,0	65	15	3	2			96,03	153
1,6	1,6	1,52	5,0	55	15	3	2	83,42	161		
1,6	1,6	1,52	8,0	55	15	3	2	83,42	162		
1,6	1,6	1,52	13,0	65	15	3	2			90,24	163
1,6	1,6	1,52	16,0	65	15	3	2			96,03	164
1,8	1,8	1,72	5,5	55	15	3	2	81,12	181		
1,8	1,8	1,72	9,0	55	15	3	2	83,42	182		
1,8	1,8	1,72	14,5	65	15	3	2			90,24	183
1,8	1,8	1,72	18,0	65	15	3	2			96,03	184
2,0	2,0	1,92	6,0	55	15	3	2	81,12	201		
2,0	2,0	1,92	10,0	55	15	3	2	81,12	202		
2,0	2,0	1,92	14,0	55	15	3	2	85,74	203		
2,0	2,0	1,92	16,0	65	15	3	2			96,03	204
2,0	2,0	1,92	20,0	65	15	3	2			93,86	205
2,3	2,3	2,22	7,0	55	15	3	2	81,12	231		
2,3	2,3	2,22	11,5	55	15	3	2	81,12	232		
2,3	2,3	2,22	18,5	65	15	3	2			85,74	233
2,3	2,3	2,22	20,0	65	15	3	2			93,86	234
2,3	2,3	2,22	23,0	65	15	3	2			96,03	235
3,0	3,0	2,90	9,0	65	15	6	2	85,74	301		
3,0	3,0	2,90	15,0	65	15	6	2	96,03	302		
3,0	3,0	2,90	24,0	100	15	6	2			104,20	303
3,0	3,0	2,90	30,0	100	15	6	2			108,70	304
4,0	4,0	3,90	12,0	65	15	6	2	96,03	401		
4,0	4,0	3,90	20,0	65	15	6	2	96,03	402		
4,0	4,0	3,90	32,0	100	15	6	2			108,70	403
4,0	4,0	3,90	40,0	100	15	6	2			111,80	404
5,0	5,0	4,90	15,0	65	15	6	2	96,03	501		
5,0	5,0	4,90	25,0	65	15	6	2	96,03	502		
5,0	5,0	4,90	40,0	100	15	6	2			111,80	503
5,0	5,0	4,90	50,0	100	15	6	2			117,50	504
6,0	6,0	5,90	18,0	65	15	6	2	96,03	601		
6,0	6,0	5,90	30,0	100	15	6	2			108,70	602
6,0	6,0	5,90	48,0	100	15	6	2			117,50	603
6,0	6,0	5,90	60,0	100	15	6	2			121,10	604

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

W | λ_s=55° γ_s= 7° | HPC

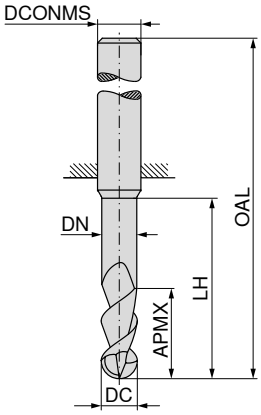

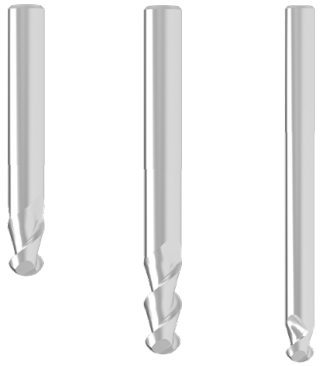

Factory standard | Factory standard | Factory standard

DC h6 mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	54 640 ... EUR V0/5A		54 640 ... EUR V0/5A		54 640 ... EUR V0/5A	
3	5,0	2,8	12	55	6	2	78,66	031				
3	3,5	2,8	15	58	6	2			85,74	034		
3	8,0	2,8	15	58	6	2			90,11	032		
3	3,5	2,8	24	67	6	2					104,90	035
4	6,5	3,8	12	55	6	2	78,66	041				
4	4,5	3,8	20	62	6	2			85,74	044		
4	10,5	3,8	20	62	6	2			90,11	042		
4	4,5	3,8	32	74	6	2					104,90	045
5	8,0	4,8	15	58	6	2	78,66	051				
5	5,5	4,8	25	70	6	2			85,74	054		
5	13,0	4,8	25	70	6	2			90,11	052		
5	5,5	4,8	40	88	6	2					104,90	055
6	10,0	5,8	18	58	6	2	78,66	061				
6	7,0	5,8	30	70	6	2			85,74	064		
6	16,0	5,8	30	70	6	2			90,11	062		
6	7,0	5,8	48	88	6	2					103,10	065
8	13,0	7,7	24	64	8	2	102,90	081				
8	9,0	7,7	40	80	8	2			111,80	084		
8	21,0	7,7	40	80	8	2			117,30	082		
8	9,0	7,7	64	104	8	2					134,80	085
10	16,0	9,7	30	74	10	2	138,10	101				
10	11,0	9,7	50	94	10	2			150,60	104		
10	26,0	9,7	50	94	10	2			159,50	102		
10	11,0	9,7	80	124	10	2					181,10	105
12	19,0	11,6	36	85	12	2	194,30	121				
12	13,0	11,6	60	109	12	2			253,30	124		
12	31,0	11,6	60	109	12	2			262,20	122		
12	13,0	11,6	96	145	12	2					349,10	125
14	22,0	13,6	42	91	14	2	240,60	141				
14	15,0	13,6	70	119	14	2			314,30	144		
14	36,0	13,6	70	119	14	2			330,30	142		
14	15,0	13,6	112	161	14	2					453,60	145
16	25,0	15,5	48	100	16	2	315,70	161				
16	17,0	15,5	80	132	16	2			414,30	164		
16	41,0	15,5	80	132	16	2			433,20	162		
16	17,0	15,5	128	180	16	2					618,50	165
18	29,0	17,5	54	106	18	2	440,50	181				
18	20,0	17,5	90	142	18	2			576,50	184		
18	47,0	17,5	90	142	18	2			604,10	182		
18	20,0	17,5	144	196	18	2					864,70	185
20	32,0	19,5	60	114	20	2	443,40	201				
20	52,0	19,5	100	154	20	2			611,30	202		
20	22,0	19,5	100	154	20	2			585,30	204		
20	22,0	19,5	160	214	20	2					872,00	205

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 460+461

14

Ball Nosed Cutter

W | λ_s=30° γ_s=12°

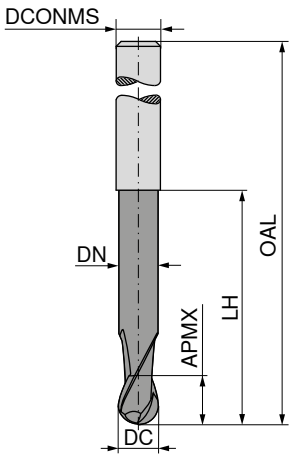

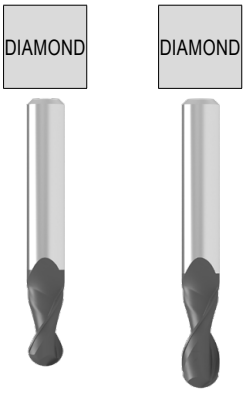

Factory standard | Factory standard

DC h10 mm	APMX mm	LH mm	DN mm	OAL mm	DCONMS h6 mm	ZEFP	52 766 ... EUR V1		52 768 ... EUR V1	
0,5	1,5			38	3	2	153,50	**005**		
1,0	2,0			38	3	2	149,30	**010**		
2,0	3,0			38	3	2	149,30	**020**		
2,0	3,0			50	6	2	228,80	**021**		
2,0	8,0	31	1,8	60	2	2			178,10	**020**
3,0	5,0			38	3	2	149,30	**030**		
3,0	5,0			50	6	2	228,80	**031**		
3,0	12,0	41	2,8	70	3	2			169,60	**030**
4,0	8,0			54	6	2	228,80	**040**		
4,0	15,0	51	3,8	80	4	2			237,60	**040**
5,0	9,0			54	6	2	228,80	**050**		
5,0	20,0	71	4,8	100	5	2			273,80	**050**
6,0	10,0			54	6	2	221,60	**060**		
6,0	20,0	63	5,8	100	6	2			307,10	**060**
8,0	12,0			58	8	2	308,60	**080**		
8,0	20,0	83	7,8	120	8	2			405,60	**080**
10,0	14,0			66	10	2	391,00	**100**		
10,0	25,0	99	9,8	140	10	2			523,00	**100**
12,0	25,0	104	11,8	150	12	2			689,40	**120**

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Micro-ball nosed cutter

▲ Radius accuracy: ± 0,01 mm

W | λ_s=30° γ_s= 5°

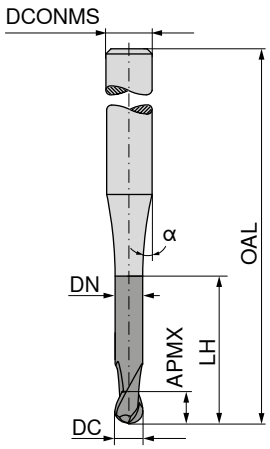

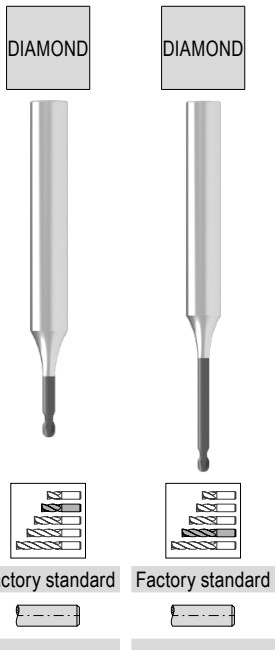

DC f8 mm	APMX mm	LH mm	DN mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 912 ... EUR V0/5A		50 912 ... EUR V0/5A	
0,6	1,2	3,0	0,58	55	15	6	2	182,40	**906**		
0,6	1,2	6,0	0,58	65	15	6	2			199,90	**006**
0,8	1,2	4,0	0,77	55	15	6	2	182,40	**908**		
0,8	1,2	8,0	0,77	65	15	6	2			199,90	**008**
1,0	1,5	5,0	0,95	55	15	6	2	182,40	**910**		
1,0	1,5	12,0	0,95	65	15	6	2			199,90	**010**
1,2	1,6	6,0	1,15	55	15	6	2	182,40	**912**		
1,2	1,6	12,0	1,15	65	15	6	2			199,90	**012**
1,5	1,8	7,5	1,44	55	15	6	2	182,40	**915**		
1,5	1,8	15,0	1,44	65	15	6	2			199,90	**015**
2,0	2,0	10,0	1,92	55	15	6	2	182,40	**920**		
2,0	2,0	20,0	1,92	65	15	6	2			199,90	**020**
P											
M											
K											
N									●		●
S											
H											
O									●		●

→ v_c/f_z Page 418

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm



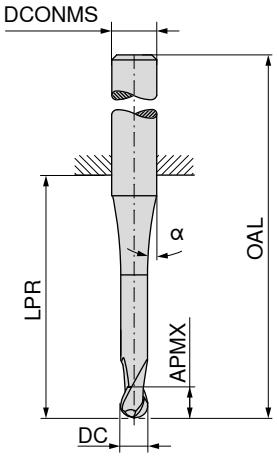

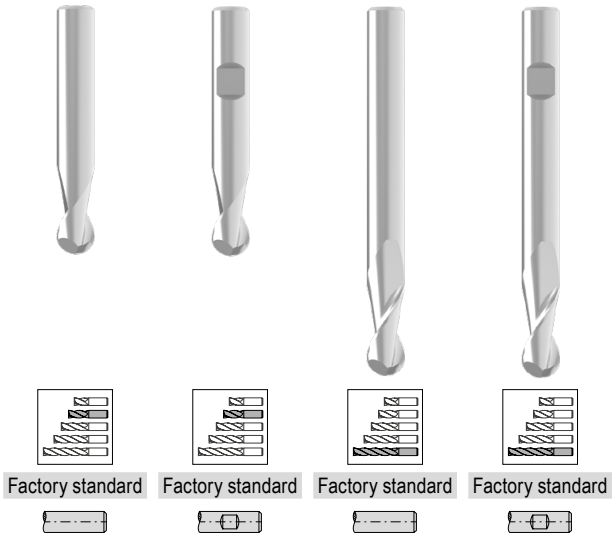

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 050 ... EUR V1/5B		52 052 ... EUR V1/5B		52 051 ... EUR V1/5B		52 053 ... EUR V1/5B	
0,10	0,2	12,5	38	8	3	2	107,60	**91000**						
0,15	0,3	11,5	38	8	3	2	93,43	**91500**						
0,20	0,4	12,0	38	8	3	2	85,90	**92000**						
0,25	0,5	12,5	38	8	3	2	82,86	**92500**						
0,30	1,0	11,3	38	8	3	2	76,79	**93000**						
0,35	1,0	11,1	38	8	3	2	67,92	**93500**						
0,40	1,0	10,9	38	8	3	2	49,40	**94000**						
0,50	1,5	11,7	38	7	3	2	39,41	**95000**						
0,50	1,5	18,0	54	11	6	2	47,22	**95100**						
0,50	1,5	47,0	75	7	3	2					54,45	**95000**		
0,50	1,5	44,0	80	11	6	2					63,01	**95100**		
0,60	1,5	11,3	38	7	3	2	43,32	**96000**						
0,70	2,0	11,4	38	7	3	2	39,41	**97000**						
0,80	2,0	11,7	38	7	3	2	39,41	**98000**						
0,90	2,5	11,7	38	7	3	2	39,41	**99000**						
1,00	2,0	22,0	50	7	3	2	40,71	**31000**						
1,00	2,0	18,0	54	10	6	2	43,62	**01000**	43,62	**01000**				
1,00	3,0	47,0	75	7	3	2					59,99	**31000**		
1,00	3,0	44,0	80	10	6	2					68,08	**01000**	68,08	**01000**
1,10	3,0	22,0	50	6	3	2	39,41	**31100**						
1,20	3,0	22,0	50	5	3	2	39,41	**31200**						
1,40	3,0	22,0	50	5	3	2	39,41	**31400**						
1,50	3,0	22,0	50	6	3	2	39,41	**31500**						
1,50	3,0	18,0	54	10	6	2	43,62	**01500**	43,62	**01500**				
1,50	4,0	47,0	75	5	3	2					59,40	**31500**		
1,50	4,0	44,0	80	10	6	2					68,08	**01500**	68,08	**01500**
1,60	4,0	22,0	50	6	3	2	39,41	**31600**						
1,80	4,0	22,0	50	6	3	2	39,41	**31800**						
2,00	4,0	22,0	50	5	3	2	40,71	**32000**						
2,00	4,0	18,0	54	9	6	2	43,62	**02000**	43,62	**02000**				
2,00	6,0	47,0	75	5	3	2					55,64	**32000**		
2,00	6,0	44,0	80	10	6	2					66,49	**02000**	66,49	**02000**
2,50	5,0	22,0	50	3	3	2	39,41	**32500**						
2,50	5,0	18,0	54	9	6	2	43,62	**02500**	43,62	**02500**				
2,50	8,0	47,0	75	3	3	2					54,33	**32500**		
2,50	8,0	44,0	80	10	6	2					66,93	**02500**	66,93	**02500**
3,00	6,0	22,0	50		3	2	40,71	**33000**						
3,00	6,0	18,0	54	9	6	2	43,62	**03000**	43,62	**03000**				
3,00	10,0	47,0	75		3	2					53,42	**33000**		
3,00	10,0	44,0	80	9	6	2					65,03	**03000**	65,03	**03000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm



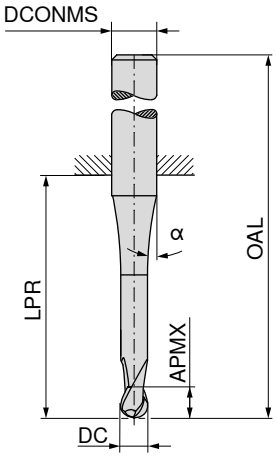

Factory standard | Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 050 ... EUR V1/5B		52 052 ... EUR V1/5B		52 051 ... EUR V1/5B		52 053 ... EUR V1/5B	
4,00	7,0	18,0	54	7	6	2	43,62	**04000**	43,62	**04000**				
4,00	7,0	26,0	54		4	2	41,43	**44000**						
4,00	13,0	47,0	75		4	2					50,55	**44000**		
4,00	13,0	44,0	80	8	6	2					65,03	**04000**	65,03	**04000**
5,00	8,0	18,0	54	6	6	2	43,62	**05000**	43,62	**05000**				
5,00	8,0	26,0	54		5	2	43,62	**55000**						
5,00	14,0	47,0	75		5	2					56,78	**55000**		
5,00	14,0	64,0	100	5	6	2					65,03	**05000**	65,03	**05000**
6,00	10,0	18,0	54		6	2	43,62	**06000**	43,62	**06000**				
6,00	16,0	64,0	100		6	2					61,55	**06000**	61,55	**06000**
8,00	12,0	23,0	59		8	2	50,55	**08000**	50,55	**08000**				
8,00	22,0	64,0	100		8	2					72,00	**08000**	72,00	**08000**
10,00	13,0	27,0	67		10	2	65,34	**10000**	65,34	**10000**				
10,00	25,0	60,0	100		10	2					96,63	**10000**	96,63	**10000**
12,00	16,0	28,0	73		12	2	94,16	**12000**	94,16	**12000**				
12,00	26,0	55,0	100		12	2					128,80	**12000**	128,80	**12000**
14,00	16,0	30,0	75		14	2	122,00	**14000**	122,00	**14000**				
14,00	26,0	55,0	100		14	2					182,40	**14000**	182,40	**14000**
16,00	20,0	35,0	83		16	2	135,90	**16000**	135,90	**16000**				
16,00	30,0	102,0	150		16	2					295,70	**16000**	295,70	**16000**
20,00	25,0	43,0	93		20	2	236,10	**20000**	236,10	**20000**				
20,00	40,0	100,0	150		20	2					356,40	**20000**	356,40	**20000**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O	○	○	○	○

→ v_c/f_z Page 480–486

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

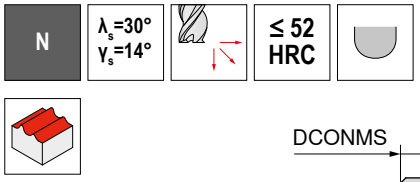

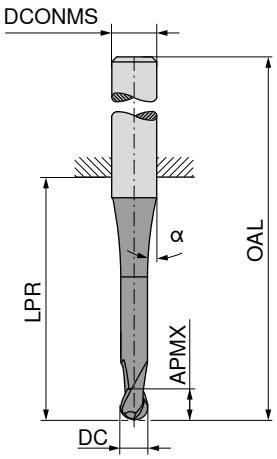

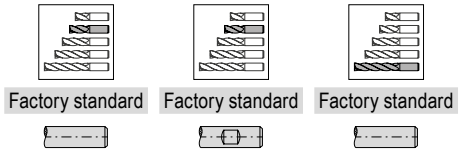

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 054 ... EUR V1/5B		52 056 ... EUR V1/5B		52 055 ... EUR V1/5B	
0,10	0,2	12,5	38	8	3	2	113,10	**91000**				
0,15	0,3	11,5	38	8	3	2	99,20	**91500**				
0,20	0,4	12,0	38	8	3	2	94,16	**92000**				
0,25	0,5	12,5	38	8	3	2	109,20	**92500**				
0,30	1,0	11,3	38	8	3	2	101,70	**93000**				
0,35	1,0	11,1	38	8	3	2	90,96	**93500**				
0,40	1,0	10,9	38	8	3	2	67,80	**94000**				
0,50	1,5	11,7	38	7	3	2	55,91	**95000**				
0,50	1,5	47,0	75	7	3	2					63,44	**95000**
0,50	1,5	44,0	80	11	6	2					95,18	**95100**
0,50	1,5	18,0	54	11	6	2	58,54	**95100**				
0,60	1,5	11,3	38	7	3	2	60,12	**96000**				
0,70	2,0	11,4	38	7	3	2	55,91	**97000**				
0,80	2,0	11,7	38	7	3	2	55,91	**98000**				
0,90	2,5	11,7	38	7	3	2	55,91	**99000**				
1,00	2,0	22,0	50	7	3	2	59,54	**31000**				
1,00	2,0	18,0	54	10	6	2	65,48	**01000**	65,48	**01000**		
1,00	3,0	44,0	80	10	6	2					101,40	**01000**
1,00	3,0	47,0	75	7	3	2					84,61	**31000**
1,10	3,0	22,0	50	6	3	2	55,91	**31100**				
1,20	3,0	22,0	50	5	3	2	55,91	**31200**				
1,40	3,0	22,0	50	5	3	2	55,91	**31400**				
1,50	3,0	22,0	50	6	3	2	59,54	**31500**				
1,50	3,0	18,0	54	10	6	2	65,48	**01500**	65,48	**01500**		
1,50	4,0	44,0	80	10	6	2					101,40	**01500**
1,50	4,0	47,0	75	5	3	2					84,01	**31500**
1,60	4,0	22,0	50	6	3	2	55,91	**31600**				
1,80	4,0	22,0	50	6	3	2	55,91	**31800**				
2,00	4,0	18,0	54	9	6	2	65,48	**02000**	65,48	**02000**		
2,00	4,0	22,0	50	5	3	2	59,54	**32000**				
2,00	6,0	44,0	80	10	6	2					99,08	**02000**
2,00	6,0	47,0	75	5	3	2					78,95	**32000**
2,50	5,0	18,0	54	9	6	2	68,81	**02500**	68,81	**02500**		
2,50	5,0	22,0	50	3	3	2	55,91	**32500**				
2,50	8,0	44,0	80	10	6	2					100,10	**02500**
2,50	8,0	47,0	75	3	3	2					77,51	**32500**
3,00	6,0	18,0	54	9	6	2	65,48	**03000**	65,48	**03000**		

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s=30° γ_s=14° | ≤ 52 HRC

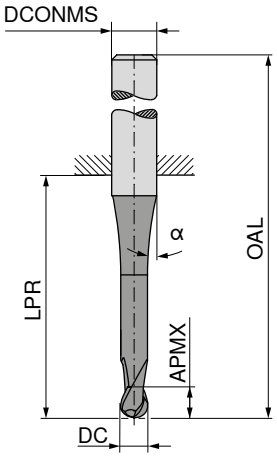

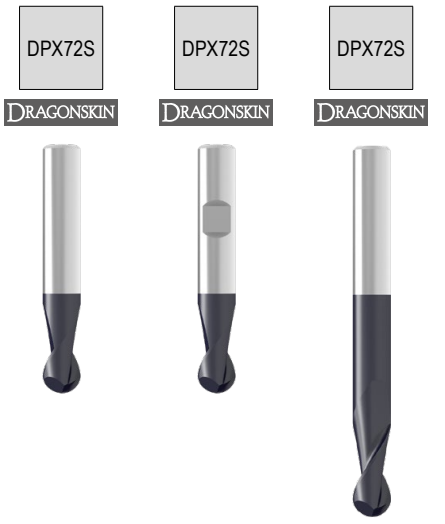

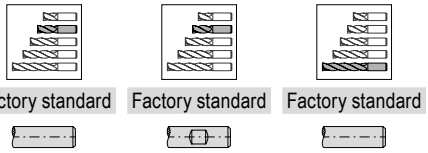

Factory standard | Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	α°	DCONMS h6 mm	ZEFP	52 054 ... EUR V1/5B		52 056 ... EUR V1/5B		52 055 ... EUR V1/5B	
3,00	6,0	22,0	50		3	2	59,54	**33000**				
3,00	10,0	47,0	75		3	2					76,32	**33000**
3,00	10,0	44,0	80	9	6	2					97,49	**03000**
4,00	7,0	18,0	54	10	6	2	65,48	**04000**	65,48	**04000**		
4,00	7,0	26,0	54		4	2	62,86	**44000**				
4,00	13,0	47,0	75		4	2					73,15	**44000**
4,00	13,0	44,0	80	8	6	2					97,49	**04000**
5,00	8,0	18,0	54	6	6	2	65,48	**05000**	65,48	**05000**		
5,00	8,0	26,0	54		5	2	65,48	**55000**				
5,00	14,0	47,0	75		5	2					83,14	**55000**
5,00	14,0	64,0	100	5	6	2					97,49	**05000**
6,00	10,0	18,0	54		6	2	65,48	**06000**	65,48	**06000**		
6,00	16,0	64,0	100		6	2					97,94	**06000**
8,00	12,0	23,0	59		8	2	79,67	**08000**	79,67	**08000**		
8,00	22,0	64,0	100		8	2					117,80	**08000**
10,00	13,0	27,0	67		10	2	104,90	**10000**	104,90	**10000**		
10,00	25,0	60,0	100		10	2					155,00	**10000**
12,00	16,0	28,0	73		12	2	149,30	**12000**	149,30	**12000**		
12,00	26,0	55,0	100		12	2					204,40	**12000**
14,00	16,0	30,0	75		14	2	189,80	**14000**	189,80	**14000**		
14,00	26,0	55,0	100		14	2					273,80	**14000**
16,00	20,0	35,0	83		16	2	217,40	**16000**	217,40	**16000**		
16,00	30,0	102,0	150		16	2					450,50	**16000**
18,00	22,0	45,0	93		18	2	295,70	**18000**	295,70	**18000**		
20,00	25,0	43,0	93		20	2	356,40	**20000**	356,40	**20000**		
20,00	40,0	100,0	150		20	2					550,40	**20000**

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm
▲ For Ø DC ≤ 5.0 mm, angle tolerance α and β: ± 0.5°

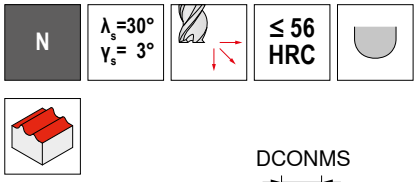

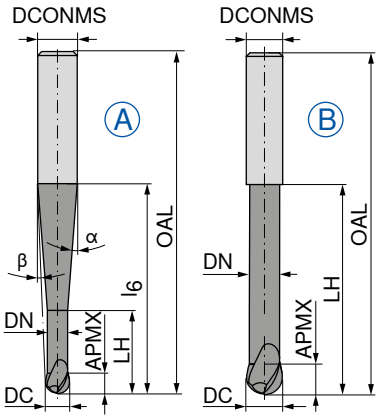





Factory standard

Factory standard

DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 714 ... EUR V1		52 717 ... EUR V1	
0,5	1,0	0,45	2,0	20	57	10	8,5	6	2	A	159,50	**005**		
1,0	2,0	0,95	4,0	20	57	10	8	6	2	A	162,40	**010**		
1,0	2,0	0,95	4,0	40	80	4,5	4	6	2	A			147,70	**010**
1,5	2,5	1,40	7,5	20	57	12,5	7	6	2	A	144,80	**015**		
1,5	2,5	1,40	7,5	40	80	4,5	3,5	6	2	A			134,00	**015**
2,0	3,0	1,80	8,0	20	57	12	6,5	6	2	A	115,90	**020**		
2,0	3,0	1,80	8,0	40	80	4	3	6	2	A			119,50	**020**
3,0	3,5	2,80	10,0	20	57	11,5	5	6	2	A	111,40	**030**		
3,0	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A			115,50	**030**
4,0	4,0	3,80	12,0	20	57	11	3,5	6	2	A	109,40	**040**		
4,0	4,0	3,80	20,0	40	80	4	1,5	6	2	A			107,60	**040**
5,0	5,0	4,70	14,0	20	57	10	2	6	2	A	107,00	**050**		
5,0	5,0	4,70	25,0	40	80	3	1	6	2	A			109,40	**050**
6,0	6,0	5,60	20,0		57			6	2	B	100,50	**060**		
6,0	6,0	5,60	40,0		80			6	2	B			115,00	**060**
6,0	6,0	5,60	25,0	60	100	2	1	8	2	A			156,60	**061**
8,0	7,0	7,60	25,0		63			8	2	B	140,30	**080**		
8,0	7,0	7,60	60,0		100			8	2	B			155,00	**080**
8,0	7,0	7,60	30,0	75	120	2	1	10	2	A			208,50	**081**
10,0	8,0	9,60	30,0		72			10	2	B	191,30	**100**		
10,0	8,0	9,60	50,0		100			10	2	B			159,50	**102**
10,0	8,0	9,60	75,0		120			10	2	B			187,00	**100**
10,0	8,0	9,60	40,0	110	160	1	1	12	2	A			283,90	**101**
12,0	10,0	11,50	35,0		83			12	2	B	252,10	**120**		
12,0	10,0	11,50	35,0	40	92	35	3,5	16	2	A	352,00	**121**		
12,0	10,0	11,50	70,0		120			12	2	B			256,50	**122**
12,0	10,0	11,50	70,0		160			12	2	B			307,10	**120**
12,0	10,0	11,50	50,0	150	200	1,5	1	16	2	A			557,60	**121**
16,0	12,0	15,50	40,0		92			16	2	B	344,70	**160**		
16,0	12,0	15,50	80,0		200			16	2	B			544,50	**160**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °



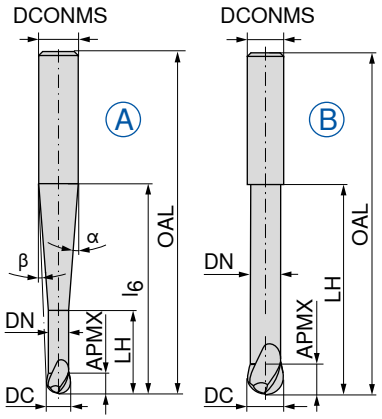

Factory standard

52 320 ...

DC e8 mm	APMX mm	DN mm	LH mm	l6 mm	OAL mm	α°	β°	DCONMS h6 mm	ZEFP	Fig.	EUR V1	
2	3	1,8	8	40	100	3,6	3	6	2	A	95,60	**020**
3	4	2,8	12	40	100	3,1	2,1	6	2	A	95,60	**030**
4	5	3,8	16	40	100	2,4	1,2	6	2	A	94,16	**040**
5	6	4,7	20	40	100	1,4	0,7	6	2	A	92,72	**050**
6	6	5,7	25	50	100	2,3	1,2	8	2	A	127,80	**061**
6	6	5,7	25		100			6	2	B	79,53	**060**
8	7	7,7	32		100			8	2	B	118,50	**080**
8	7	7,7	32	60	120	2	1	10	2	A	176,70	**081**
10	9	9,6	40	81	160	1,4	0,7	12	2	A	286,90	**101**
10	9	9,6	40		120			10	2	B	169,60	**100**
12	11	11,6	50		160			12	2	B	262,20	**120**
12	11	11,6	50	101	200	2,3	1,2	16	2	A	496,80	**121**
16	14	15,6	60		200			16	2	B	447,60	**160**

P	●
M	○
K	●
N	○
S	○
H	
O	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter 220°

▲ Radius accuracy: ± 0,005 mm

N

λ_s=30°
γ_s= 3°

Ti1000

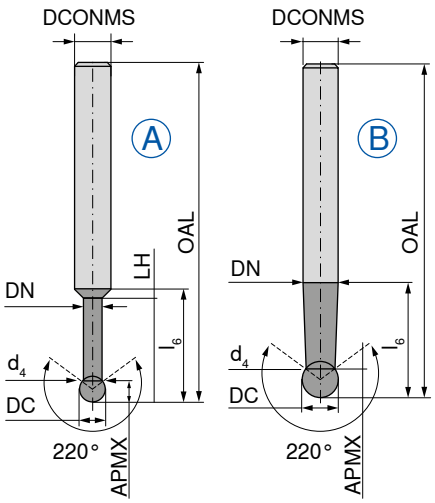

Factory standard

52 323 ...

DC $_{f8}$ mm	APMX mm	DN mm	d_4 mm	LH mm	l_6 mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	Fig.	EUR V1	
1,0	0,7	0,80	0,8	5	17	58	6	2	A	143,20	**010**
1,5	1,2	1,20	1,2	8	20	58	6	2	A	143,20	**015**
2,0	1,5	1,40	1,4	10	21	58	6	2	A	143,20	**020**
3,0	2,3	2,40	2,4	15	22	65	6	2	A	144,30	**030**
4,0	3,0	3,40	3,4	20	25	70	6	2	A	147,70	**040**
5,0	3,5	4,30	4,3	25	28	80	6	2	A	155,00	**050**
6,0	4,0	5,90	5,3	30	30	100	6	2	A	176,70	**060**
8,0	6,5	7,90	6,2		40	100	8	2	B	236,10	**080**
10,0	8,2	9,90	7,6		50	100	10	2	B	310,10	**100**
12,0	9,9	11,90	9,2		110	160	12	2	B	405,60	**121**
12,0	9,9	11,90	9,2		70	120	12	2	B	382,50	**120**

P	●
M	○
K	●
N	○
S	○
H	○
O	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s=30° γ_s=13° | HPC | Ti1000

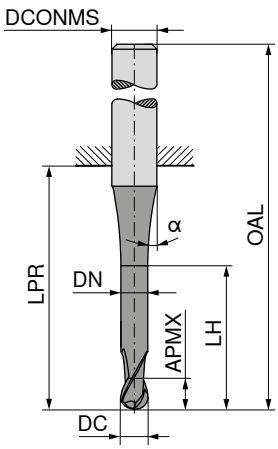

≈DIN 6527

54 073 ...

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	α°	ZEFP	EUR V3/5C	
3	5	2,9	9	14	50	6	15	2	22,58	**03115**
4	8	3,9	12	18	54	6	45	2	22,58	**04120**
5	9	4,9	15	18	54	6	45	2	22,58	**05125**
6	10	5,9	17	18	54	6	45	2	23,55	**06130**
8	12	7,8	20	22	58	8	45	2	30,93	**08140**
10	14	9,8	26	26	66	10	45	2	38,66	**10150**
12	16	11,8	28	28	73	12	45	2	56,41	**12160**
16	22	15,7	32	34	82	16	45	2	92,16	**16180**
20	26	19,7	40	42	92	20	45	2	131,60	**20110**

P	●
M	○
K	●
N	●
S	○
H	
O	

→ v_c/f_z Page 476+477

Ball Nosed Cutter

▲ Radius accuracy: ± 0,005 mm



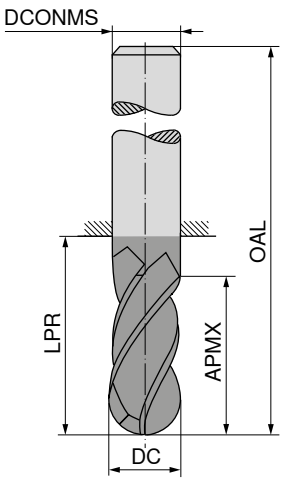

Factory standard | Factory standard

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	52 400 ... EUR V1		52 402 ... EUR V1	
3	5	22	50	3	4	64,90	030		
3	5	47	75	3	4			78,07	030
4	8	26	54	4	4	65,90	040		
4	8	47	75	4	4			88,94	040
5	9	26	54	5	4	67,80	050		
5	9	47	75	5	4			90,54	050
6	10	18	54	6	4	71,42	060		
6	10	64	100	6	4			92,72	060
8	12	23	59	8	4	88,37	080		
8	12	64	100	8	4			117,80	080
10	14	27	67	10	4	120,10	100		
10	14	60	100	10	4			149,30	100
12	16	29	74	12	4	152,20	120		
12	16	55	100	12	4			194,30	120
14	18	30	75	14	4	189,80	140		
14	18	55	100	14	4			237,60	140
16	22	35	83	16	4	249,20	160		
16	22	102	150	16	4			356,40	160
20	26	43	93	20	4	382,50	200		
20	26	100	150	20	4			524,60	200

P	○	○
M	●	●
K	○	○
N	●	●
S	●	●
H		
O	●	●

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s = 35° 38° | γ_s = 7° | HPC

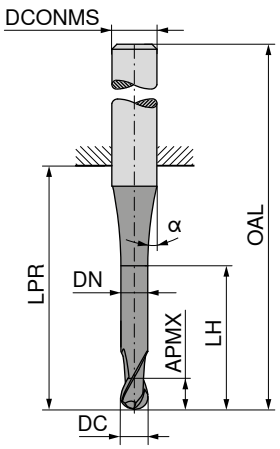





≈DIN 6527 | ≈DIN 6527

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	α°	ZEFP	54 074 ... EUR V3/5C		54 074 ... EUR V3/5C	
3	8			21	57	6	30	4	22,58	**03115**		
3	8	2,9	15	21	57	6	45	4			22,58	**03215**
4	11			21	57	6	30	4	22,58	**04120**		
4	11	3,9	16	21	57	6	45	4			22,58	**04220**
5	13			21	57	6	30	4	22,58	**05125**		
5	13	4,9	19	21	57	6	45	4			22,58	**05225**
6	13			21	57	6	30	4	23,55	**06130**		
6	13	5,9	19	21	57	6	45	4			26,44	**06430**
8	19			36	72	8	30	4	30,93	**08140**		
8	19	7,8	25	27	72	8	45	4			32,72	**08440**
10	22			32	72	10	30	4	38,66	**10150**		
10	22	9,7	30	32	72	10	45	4			41,43	**10450**
12	26			38	83	12	30	4	56,41	**12160**		
12	26	11,7	36	38	83	12	45	4			65,47	**12460**
16	32			44	92	16	30	4	92,16	**16180**		
16	32	15,5	42	44	92	16	45	4			96,75	**16480**
20	38			54	104	20	30	4	131,60	**20110**		
20	38	19,5	52	54	104	20	45	4			140,10	**20410**

P	●	●
M	●	●
K	●	●
N	○	○
S		
H		
O		

→ v_c/f_z Page 478+479

14

Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

N | λ_s=30° γ_s= 6°

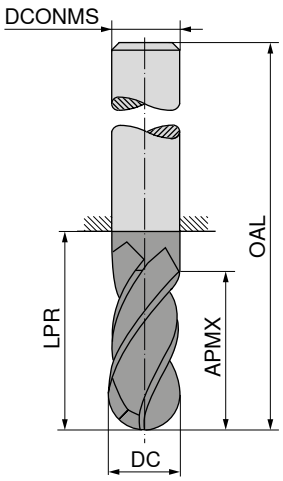

Ti1000

DIN 6527

Ti1000

DIN 6527

DC f8 mm	APMX mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 643 ... EUR V0/5A		50 643 ... EUR V0/5A	
3	8	21	57	6	4	67,80	030		
4	11	21	57	6	4	67,80	040		
6	13	21	57	6	4	67,80	060		
6	40	64	100	6	4			82,28	061
8	19	27	63	8	4	75,61	080		
8	40	64	100	8	4			91,13	081
10	22	32	72	10	4	120,70	100		
10	40	60	100	10	4			152,20	101
12	26	38	83	12	4	157,80	120		
12	45	55	100	12	4			201,40	121
12	75	105	150	12	4			305,50	122
14	26	38	83	14	4	197,00	140		
14	45	55	100	14	4			269,50	141
16	32	44	92	16	4	267,90	160		
16	75	102	150	16	4			372,40	161
20	38	54	104	20	4	372,40	200		
20	75	100	150	20	4			585,30	201

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm

H | λ_s=30° γ_s= 4° | ≤ 68 HRC

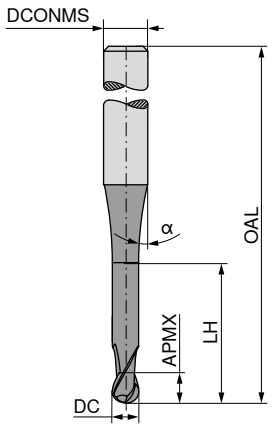

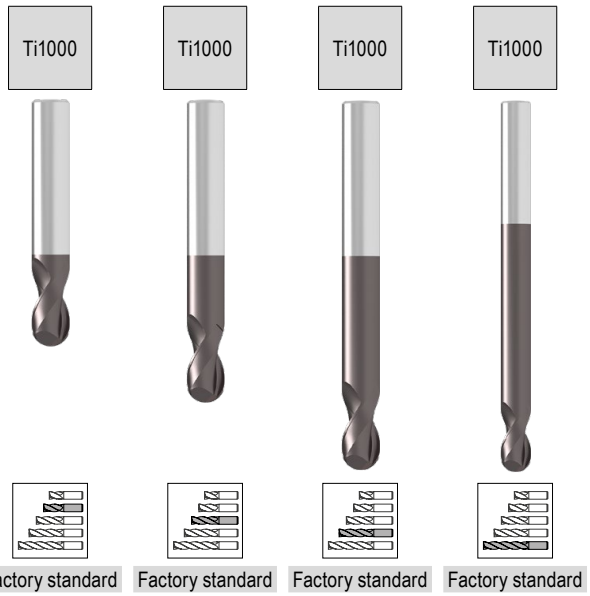

Factory standard | Factory standard | Factory standard | Factory standard

DC mm	DC Tol.	APMX mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	ZEFP	50 906 ... EUR V0/5A		50 906 ... EUR V0/5A		50 906 ... EUR V0/5A		50 906 ... EUR V0/5A	
0,20	0/-0,015	0,3	0,6	40	15	4	2	77,06	**002**						
0,25	0/-0,015	0,3	0,6	40	15	4	2	77,06	**925**						
0,30	0/-0,015	0,3	0,6	40	15	4	2	77,06	**003**						
0,35	0/-0,015	0,4	0,7	40	15	4	2	77,06	**935**						
0,40	0/-0,015	0,4	0,7	40	15	4	2	77,06	**004**						
0,50	0/-0,015	0,5	0,8	40	15	4	2	77,06	**005**						
0,50	0/-0,015	0,5	0,8	54	15	6	2	88,50	**951**						
0,60	0/-0,015	0,6	0,9	40	15	4	2	77,06	**006**						
0,70	0/-0,015	0,8	1,1	40	15	4	2	77,06	**007**						
0,80	0/-0,015	0,8	1,1	40	15	4	2	77,06	**008**						
0,90	0/-0,015	0,9	1,2	40	15	4	2	77,06	**009**						
1,00	0/-0,015	1,0	1,3	54		4	2					77,06	**010**		
1,00	0/-0,015	1,0	1,3	54	15	6	2	88,50	**011**						
1,00	0/-0,015	1,0	1,3	64		6	2					92,72	**012**		
1,00	0/-0,015	1,0	1,3	80		6	2							96,77	**013**
1,00	0/-0,015	1,0	1,3	100		6	2							100,70	**014**
1,20	0/-0,015	1,2	1,5	54		4	2					77,06	**112**		
1,40	0/-0,015	1,4	1,8	54		4	2					77,06	**114**		
1,50	0/-0,015	1,5	1,9	54		4	2					77,06	**115**		
1,50	0/-0,015	1,5	1,9	54	15	6	2	88,50	**215**						
1,50	0/-0,015	1,5	1,9	80		6	2							96,77	**315**
1,60	0/-0,015	1,8	2,3	54		4	2					77,06	**116**		
1,80	0/-0,015	1,8	2,3	54		4	2					77,06	**118**		
2,00	0/-0,015	2,0	2,5	54		4	2					77,06	**206**		
2,00	0/-0,015	4,0	5,0	54		6	2					88,50	**202**		
2,00	0/-0,015	4,0	5,0	64		6	2					92,72	**207**		
2,00	0/-0,015	4,0	5,0	82		6	2							96,77	**204**
2,00	0/-0,015	4,0	5,0	100		6	2							100,70	**205**
2,50	0/-0,02	5,0	6,6	54		4	2					77,06	**251**		
2,50	0/-0,02	5,0	6,3	54	15	6	2	88,50	**252**						
2,50	0/-0,02	5,0	6,3	64		6	2					93,14	**253**		
2,50	0/-0,02	5,0	6,3	82		6	2							96,77	**254**
2,50	0/-0,02	5,0	6,3	100		6	2							100,70	**255**
3,00	0/-0,02	5,0	6,3	54		4	2					77,06	**030**		
3,00	0/-0,02	5,0	6,3	82		4	2							77,06	**032**
3,00	0/-0,02	5,0	6,3	100		4	2							77,06	**033**
3,00	0/-0,02	5,0	6,3	54	15	6	2	88,50	**035**						
3,00	0/-0,02	5,0	6,3	64		6	2					92,72	**036**		
3,00	0/-0,02	5,0	6,3	82		6	2							96,77	**037**
3,00	0/-0,02	8,0	10,0	100		6	2							100,70	**038**
4,00	0/-0,02	8,0		54	15	4	2					77,06	**040**		
4,00	0/-0,02	8,0	10,0	82	15	4	2							91,27	**042**
4,00	0/-0,02	8,0	10,0	100	15	4	2							97,64	**043**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Ball Nosed Cutter

▲ Radius accuracy: ± 0.005 mm

H | λ_s=30° γ_s= 4° | ≤ 68 HRC

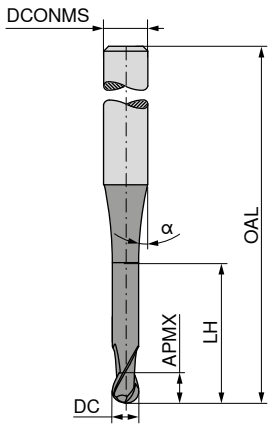

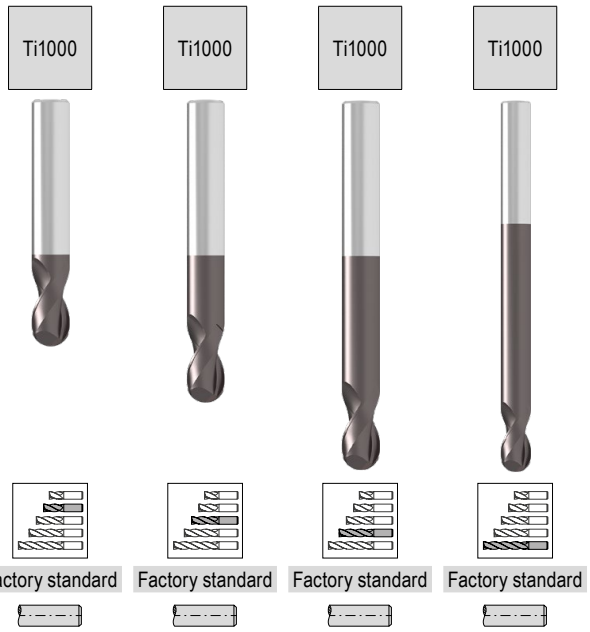

Factory standard | Factory standard | Factory standard | Factory standard

DC mm	DC Tol.	APMX mm	LH mm	OAL mm	α°	DCONMS $_{h5}$ mm	ZEFP	50 906 ... EUR V0/5A		50 906 ... EUR V0/5A		50 906 ... EUR V0/5A		50 906 ... EUR V0/5A	
4,00	0/-0,02	8,0	10,0	54	15	6	2	77,06	**045**						
4,00	0/-0,02	8,0	10,0	64		6	2					92,72	**046**		
4,00	0/-0,02	8,0	10,0	82		6	2							96,77	**047**
4,00	0/-0,02	8,0	10,0	100		6	2							100,70	**048**
5,00	0/-0,02	9,0		54	15	5	2					77,06	**050**		
5,00	0/-0,02	9,0		64	15	5	2					92,72	**051**		
5,00	0/-0,02	9,0	11,3	82	15	5	2							96,77	**052**
5,00	0/-0,02	9,0	11,3	100	15	5	2							100,70	**053**
5,00	0/-0,02	9,0	11,3	54	15	6	2	77,06	**055**						
5,00	0/-0,02	9,0	11,3	64		6	2					92,72	**056**		
5,00	0/-0,02	9,0	11,3	82		6	2							96,77	**057**
5,00	0/-0,02	9,0	11,3	100		6	2							100,70	**058**
6,00	0/-0,02	10,0		54	15	6	2	77,06	**060**						
6,00	0/-0,02	10,0		64	15	6	2					92,72	**061**		
6,00	0/-0,02	10,0		82	15	6	2							96,77	**062**
6,00	0/-0,02	10,0		100	15	6	2							100,70	**063**
6,00	0/-0,02	10,0		120	15	6	2							105,20	**064**
8,00	0/-0,025	12,0		64	15	8	2					84,33	**081**		
8,00	0/-0,025	12,0		82	15	8	2			107,80	**082**				
8,00	0/-0,025	12,0		100	15	8	2							131,10	**083**
8,00	0/-0,025	12,0		120	15	8	2							155,00	**084**
10,00	0/-0,025	14,0		67	15	10	2	105,50	**101**						
10,00	0/-0,025	14,0		82	15	10	2			142,10	**102**				
10,00	0/-0,025	14,0		100	15	10	2							176,70	**103**
10,00	0/-0,025	14,0		127	15	10	2							215,80	**104**
12,00	0/-0,025	16,0		75	15	12	2	153,50	**121**						
12,00	0/-0,025	16,0		100	15	12	2			230,30	**122**				
12,00	0/-0,025	16,0		150	15	12	2							304,30	**123**
14,00	0/-0,025	18,0		80	15	14	2	189,80	**141**						
14,00	0/-0,025	18,0		100	15	14	2			281,00	**142**				
14,00	0/-0,025	18,0		150	15	14	2							366,40	**143**
16,00	0/-0,025	22,0		85	15	16	2	224,70	**161**						
16,00	0/-0,025	22,0		150	15	16	2							494,10	**163**
20,00	0/-0,025	26,0		90	15	20	2	372,40	**201**						
20,00	0/-0,025	26,0		150	15	20	2							653,40	**203**

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○

→ v_c/f_z Page 480–486

Torus Cutter

W

λ_s=45°
γ_s=18°

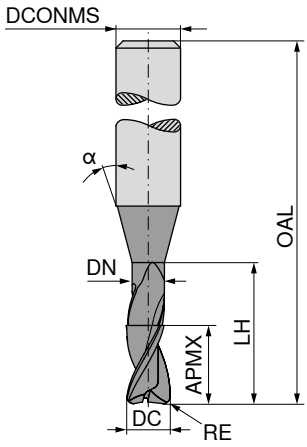

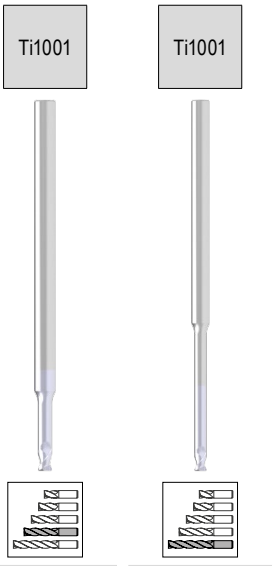

DC f8	RE -0.015	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	50 901 ... EUR V0/5A		50 901 ... EUR V0/5A	
mm	mm	mm	mm	mm	mm		mm					
0,2	0,02	0,2	0,18	0,6	55	15	3	2	99,08	**021**		
0,2	0,02	0,2	0,18	1,0	55	15	3	2	100,10	**022**		
0,2	0,02	0,2	0,18	1,6	55	15	3	2	101,00	**023**		
0,2	0,02	0,2	0,18	2,0	55	15	3	2	102,60	**024**		
0,3	0,03	0,3	0,28	0,9	55	15	3	2	99,08	**031**		
0,3	0,03	0,3	0,28	1,5	55	15	3	2	100,10	**032**		
0,3	0,03	0,3	0,28	2,4	55	15	3	2	101,00	**033**		
0,3	0,03	0,3	0,28	3,0	55	15	3	2	102,60	**034**		
0,4	0,04	0,4	0,37	1,2	55	15	3	2	99,08	**041**		
0,4	0,04	0,4	0,37	2,0	55	15	3	2	100,10	**042**		
0,4	0,04	0,4	0,37	3,2	55	15	3	2	101,00	**043**		
0,4	0,04	0,4	0,37	4,0	55	15	3	2	102,60	**044**		
0,5	0,05	0,5	0,45	1,5	55	15	3	2	96,93	**051**		
0,5	0,05	0,5	0,45	2,5	55	15	3	2	97,77	**052**		
0,5	0,05	0,5	0,45	4,0	55	15	3	2	99,08	**053**		
0,5	0,05	0,5	0,45	5,0	55	15	3	2	100,10	**054**		
0,6	0,06	0,6	0,58	2,0	55	15	3	2	83,42	**061**		
0,6	0,06	0,6	0,58	3,0	55	15	3	2	83,42	**062**		
0,6	0,06	0,6	0,58	4,2	55	15	3	2	81,12	**063**		
0,6	0,06	0,6	0,58	5,0	65	15	3	2			96,03	**064**
0,6	0,06	0,6	0,58	6,0	65	15	3	2			93,86	**065**
0,8	0,08	0,8	0,77	2,5	55	15	3	2	81,12	**081**		
0,8	0,08	0,8	0,77	4,0	55	15	3	2	81,12	**082**		
0,8	0,08	0,8	0,77	6,5	65	15	3	2			90,24	**083**
0,8	0,08	0,8	0,77	8,0	65	15	3	2			93,86	**084**
1,0	0,10	1,0	0,95	3,0	55	15	3	2	81,12	**101**		
1,0	0,10	1,0	0,95	5,0	55	15	3	2	81,12	**102**		
1,0	0,10	1,0	0,95	8,0	65	15	3	2			85,74	**103**
1,0	0,10	1,0	0,95	10,0	65	15	3	2			93,86	**104**
1,0	0,10	1,0	0,95	12,0	65	15	3	2			96,03	**105**
1,2	0,12	1,2	1,15	3,0	55	15	3	2	81,12	**121**		
1,2	0,12	1,2	1,15	6,0	55	15	3	2	81,12	**122**		
1,2	0,12	1,2	1,15	10,0	65	15	3	2			90,24	**123**
1,2	0,12	1,2	1,15	12,0	65	15	3	2			93,86	**124**
1,3	0,13	1,3	1,25	4,0	55	15	3	2	81,12	**131**		
1,3	0,13	1,3	1,25	7,0	55	15	3	2	83,42	**132**		
1,3	0,13	1,3	1,25	11,0	65	15	3	2			90,24	**133**
1,3	0,13	1,3	1,25	13,0	65	15	3	2			96,03	**134**
1,5	0,15	1,5	1,44	5,0	55	15	3	2	83,42	**151**		
1,5	0,15	1,5	1,44	7,5	55	15	3	2	81,12	**152**		
1,5	0,15	1,5	1,44	12,0	65	15	3	2			96,03	**153**
1,5	0,15	1,5	1,44	15,0	65	15	3	2			93,86	**154**
1,6	0,16	1,6	1,52	5,0	55	15	3	2	83,42	**161**		
1,6	0,16	1,6	1,52	8,0	55	15	3	2	83,42	**162**		
1,6	0,16	1,6	1,52	13,0	65	15	3	2			90,24	**163**

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

14

Continued on next page

Torus Cutter

W

λ_s=45°
γ_s=18°

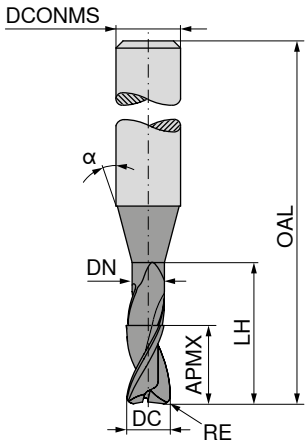

Ti1001

Factory standard

Ti1001

Factory standard

DC f8	RE -0.015	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	50 901 ... EUR V0/5A		50 901 ... EUR V0/5A	
mm	mm	mm	mm	mm	mm		mm					
1,6	0,16	1,6	1,52	16,0	65	15	3	2			96,03	164
1,8	0,18	1,8	1,72	5,5	55	15	3	2	81,12	181		
1,8	0,18	1,8	1,72	9,0	55	15	3	2	83,42	182		
1,8	0,18	1,8	1,72	14,5	65	15	3	2			90,24	183
1,8	0,18	1,8	1,72	18,0	65	15	3	2			96,03	184
2,0	0,20	2,0	1,92	6,0	55	15	3	2	81,12	201		
2,0	0,20	2,0	1,92	10,0	55	15	3	2	83,42	202		
2,0	0,20	2,0	1,92	14,0	55	15	3	2	81,12	203		
2,0	0,20	2,0	1,92	16,0	65	15	3	2			96,03	204
2,0	0,20	2,0	1,92	20,0	65	15	3	2			93,86	205
2,3	0,23	2,3	2,22	7,0	55	15	3	2	81,12	231		
2,3	0,23	2,3	2,22	11,5	55	15	3	2	83,42	232		
2,3	0,23	2,3	2,22	14,0	55	15	3	2	85,74	233		
2,3	0,23	2,3	2,22	18,5	65	15	3	2			96,03	234
2,3	0,23	2,3	2,22	20,0	65	15	3	2			96,03	235
2,3	0,23	2,3	2,22	23,0	65	15	3	2			96,03	236
3,0	0,30	3,0	2,90	9,0	65	15	6	2	85,74	301		
3,0	0,30	3,0	2,90	15,0	65	15	6	2	96,03	302		
3,0	0,30	3,0	2,90	24,0	100	15	6	2			104,20	303
3,0	0,30	3,0	2,90	30,0	100	15	6	2			108,70	304
4,0	0,40	4,0	3,90	12,0	65	15	6	2	96,03	401		
4,0	0,40	4,0	3,90	20,0	65	15	6	2	96,03	402		
4,0	0,40	4,0	3,90	32,0	100	15	6	2			108,70	403
4,0	0,40	4,0	3,90	40,0	100	15	6	2			111,80	404
5,0	0,50	5,0	4,90	15,0	65	15	6	2	96,03	501		
5,0	0,50	5,0	4,90	25,0	65	15	6	2	96,03	502		
5,0	0,50	5,0	4,90	40,0	100	15	6	2			111,80	503
5,0	0,50	5,0	4,90	50,0	100	15	6	2			117,50	504
6,0	0,60	6,0	5,90	18,0	65	15	6	2	96,03	601		
6,0	0,60	6,0	5,90	30,0	100	15	6	2			108,70	602
6,0	0,60	6,0	5,90	48,0	100	15	6	2			117,50	603
6,0	0,60	6,0	5,90	60,0	100	15	6	2			121,10	604

P		
M		
K		
N	●	●
S		
H		
O		

→ v_c/f_z Page 480–486

Torus Cutter

W

λ_s=45°
γ_s=15°

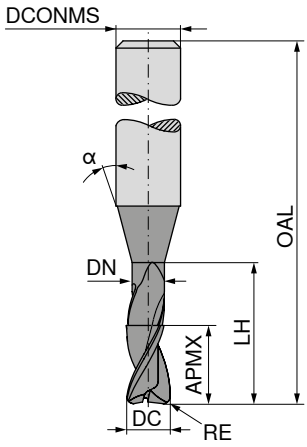

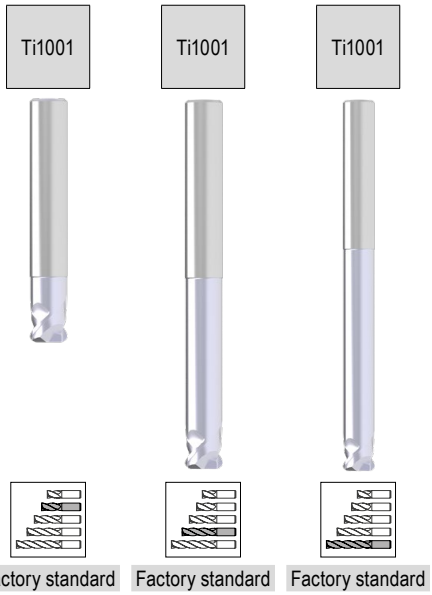

Factory standard | Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 902 ... EUR V0/5A		50 902 ... EUR V0/5A		50 902 ... EUR V0/5A	
2	0,3	2	1,8	12	50	45	6	2	87,06	020				
2	0,5	2	1,8	12	50	45	6	2	87,06	023				
2	0,3	2	1,8	22	60	45	6	2			87,06	021		
2	0,5	2	1,8	22	60	45	6	2			87,06	024		
2	0,3	2	1,8	47	85	45	6	2					126,40	022
2	0,5	2	1,8	47	85	45	6	2					126,40	025
3	0,3	2	2,8	12	50	45	6	2	87,06	030				
3	0,5	2	2,8	12	50	45	6	2	87,06	033				
3	0,3	2	2,8	22	60	45	6	2			87,06	031		
3	0,5	2	2,8	22	60	45	6	2			87,06	034		
3	0,3	2	2,8	47	85	45	6	2					126,40	032
3	0,5	2	2,8	47	85	45	6	2					126,40	035
4	0,3	3	3,8	16	54	45	6	2	87,06	040				
4	0,5	3	3,8	16	54	45	6	2	87,06	043				
4	1,0	3	3,8	16	54	45	6	2	87,06	046				
4	0,3	3	3,8	37	75	45	6	2			121,10	041		
4	0,5	3	3,8	37	75	45	6	2			121,10	044		
4	1,0	3	3,8	37	75	45	6	2			121,10	047		
4	0,3	3	3,8	47	85	45	6	2					126,40	042
4	0,5	3	3,8	47	85	45	6	2					126,40	045
4	1,0	3	3,8	47	85	45	6	2					126,40	048
5	0,5	3	4,6	16	54	45	6	2	87,06	050				
5	1,0	3	4,6	16	54	45	6	2	87,06	052				
5	1,5	3	4,6	16	54	45	6	2	87,06	054				
5	0,5	3	4,6	37	75	45	6	2			121,10	051		
5	1,0	2	4,6	37	75	45	6	2			121,10	053		
5	1,5	3	4,6	37	75	45	6	2			121,10	055		
6	0,5	4	5,6	16	54	45	6	2	87,06	060				
6	1,0	4	5,6	16	54	45	6	2	87,06	063				
6	2,0	4	5,6	16	54	45	6	2	87,06	066				
6	0,5	4	5,6	47	85	45	6	2			121,10	061		
6	1,0	4	5,6	47	85	45	6	2			121,10	064		
6	2,0	4	5,6	47	85	45	6	2			121,10	067		
6	0,5	4	5,6	47	85	45	8	2			163,70	069		
6	1,0	4	5,6	47	85	45	8	2			163,70	070		
6	2,0	4	5,6	47	85	45	8	2			163,70	071		
6	0,5	4	5,6	62	100	45	6	2					140,60	062
6	1,0	4	5,6	62	100	45	6	2					140,60	065
6	2,0	4	5,6	62	100	45	6	2					140,60	068
8	0,5	4	7,6	20	58	45	8	2	105,80	080				

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 480–486

14

Continued on next page

Torus Cutter

W

λ_s=45°
γ_s=15°

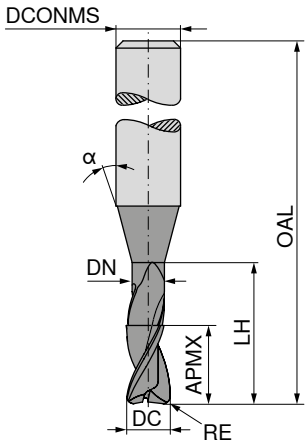

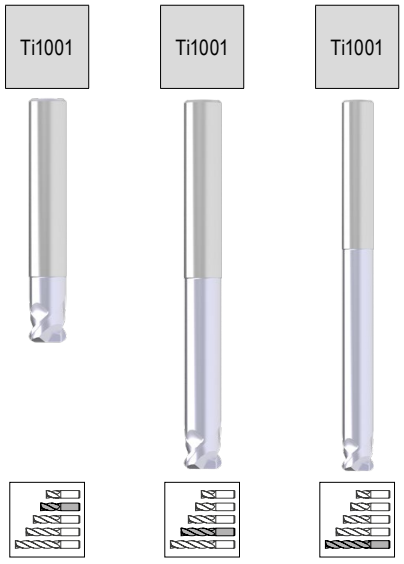

Factory standard | Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 902 ... EUR V0/5A		50 902 ... EUR V0/5A		50 902 ... EUR V0/5A	
8	1,0	4	7,6	20	58	45	8	2	105,80	**082**				
8	2,0	4	7,6	20	58	45	8	2	105,80	**084**				
8	0,5	4	7,6	62	100	45	8	2					165,20	**081**
8	1,0	4	7,6	62	100	45	8	2					165,20	**083**
8	2,0	4	7,6	62	100	45	8	2					165,20	**085**
8	2,0	4	7,6	62	100	45	10	2					228,80	**086**
10	1,0	6	9,6	18	66	45	10	2	132,10	**100**				
10	2,0	6	9,6	18	66	45	10	2	132,10	**103**				
10	3,0	6	9,6	18	66	45	10	2	132,10	**106**				
10	1,0	6	9,6	58	100	45	10	2			227,60	**101**		
10	2,0	6	9,6	58	100	45	10	2			227,60	**104**		
10	3,0	6	9,6	58	100	45	10	2			227,60	**107**		
10	1,0	6	9,6	78	120	45	10	2					266,50	**102**
10	2,0	6	9,6	78	120	45	10	2					266,50	**105**
10	3,0	6	9,6	78	120	45	10	2					266,50	**108**
10	1,0	6	9,6	78	120	45	12	2					347,70	**109**
10	2,0	6	9,6	78	120	45	12	2					347,70	**110**
10	3,0	6	9,6	78	120	45	12	2					347,70	**111**
12	1,0	8	11,5	26	73	45	12	2	194,30	**120**				
12	2,0	8	11,5	26	73	45	12	2	194,30	**123**				
12	3,0	8	11,5	26	73	45	12	2	194,30	**126**				
12	1,0	8	11,5	53	100	45	12	2			289,80	**121**		
12	2,0	8	11,5	53	100	45	12	2			289,80	**124**		
12	3,0	8	11,5	53	100	45	12	2			289,80	**127**		
12	1,0	8	11,5	73	120	45	12	2					347,70	**122**
12	2,0	8	11,5	73	120	45	12	2					347,70	**125**
12	3,0	8	11,5	73	120	45	12	2					347,70	**128**
12	4,0	8	11,5	73	120	45	12	2					347,70	**131**
12	1,0	8	11,5	103	150	45	16	2					704,00	**132**
12	2,0	8	11,5	103	150	45	16	2					704,00	**133**
12	3,0	8	11,5	103	150	45	16	2					704,00	**134**

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 480–486

Torus Cutter

W

λ_s=30°
γ_s=12°

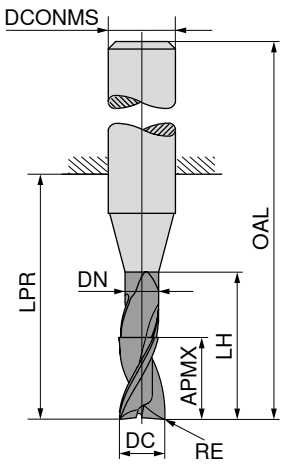

DIAMOND

Factory standard

52 765 ...

DC $_{h10}$ mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS $_{h6}$ mm	ZEFP	EUR V1	
2	0,3	8	1,8	31	32	60	2	2	194,30	**021**
3	0,5	12	2,8	41	42	70	3	2	204,40	**032**
4	0,5	15	3,8	51	52	80	4	2	255,00	**042**
5	0,5	20	4,8	71	72	100	5	2	292,50	**052**
6	0,8	20	5,8	63	64	100	6	2	320,20	**063**
8	1,0	20	7,8	83	84	120	8	2	424,50	**084**
10	1,0	25	9,8	99	100	140	10	2	539,00	**104**
12	1,5	25	11,8	104	105	150	12	2	714,20	**125**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

14

Torus Cutter

W

λ_s=30°
γ_s= 5°

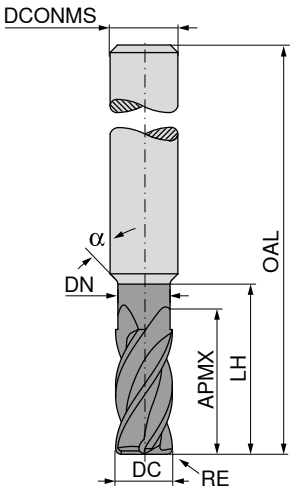

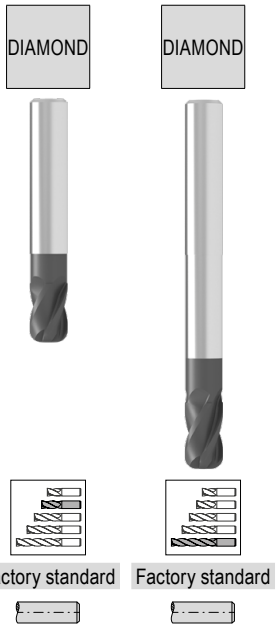

Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 911 ... EUR V0/5A		50 911 ... EUR V0/5A	
4	0,5	8	3,8	12	54	45	6	4	175,30	040		
4	1,0	8	3,8	12	54	45	6	4	175,30	041		
4	0,5	10	3,8	37	75	45	6	4			210,20	042
4	1,0	10	3,8	37	75	45	6	4			210,20	043
5	0,5	9	4,8	16	54	45	6	4	175,30	050		
5	1,0	9	4,8	16	54	45	6	4	175,30	051		
5	1,5	9	4,8	16	54	45	6	4	175,30	052		
5	0,5	12	4,8	37	75	45	6	4			210,20	053
5	1,0	12	4,8	37	75	45	6	4			210,20	054
5	1,5	12	4,8	37	75	45	6	4			210,20	055
6	0,5	10	5,6	16	54	45	6	4	175,30	060		
6	1,0	10	5,6	16	54	45	6	4	175,30	061		
6	1,5	10	5,6	16	54	45	6	4	175,30	062		
6	2,0	10	5,6	16	54	45	6	4	175,30	063		
6	0,5	12	5,6	62	100	45	6	4			231,70	064
6	1,0	12	5,6	62	100	45	6	4			231,70	065
6	1,5	12	5,6	62	100	45	6	4			231,70	066
6	2,0	12	5,6	62	100	45	6	4			231,70	067
7	0,5	11	6,6	20	58	45	8	4	231,70	070		
7	1,0	11	6,6	20	58	45	8	4	231,70	071		
7	1,5	11	6,6	20	58	45	8	4	231,70	072		
7	2,0	11	6,6	20	58	45	8	4	231,70	073		
7	0,5	14	6,6	62	100	45	8	4			292,50	074
7	1,0	14	6,6	62	100	45	8	4			292,50	075
7	1,5	14	6,6	62	100	45	8	4			292,50	076
7	2,0	14	6,6	62	100	45	8	4			292,50	077
8	0,5	12	7,6	20	58	45	8	4	231,70	080		
8	1,0	12	7,6	20	58	45	8	4	231,70	081		
8	1,5	12	7,6	20	58	45	8	4	231,70	086		
8	2,0	12	7,6	20	58	45	8	4	231,70	083		
8	0,5	14	7,6	62	100	45	8	4			292,50	084
8	1,0	14	7,6	62	100	45	8	4			292,50	085
8	1,5	14	7,6	62	100	45	8	4			292,50	082
8	2,0	14	7,6	62	100	45	8	4			292,50	087
10	0,5	14	9,6	24	66	45	10	4	294,20	100		
10	1,0	14	9,6	24	66	45	10	4	294,20	101		
10	1,5	14	9,6	24	66	45	10	4	294,20	107		
10	2,0	14	9,6	24	66	45	10	4	294,20	103		
10	3,0	14	9,6	24	66	45	10	4	294,20	104		
10	0,5	18	9,6	58	100	45	10	4			383,80	105
10	1,0	18	9,6	58	100	45	10	4			383,80	106

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Continued on next page

Torus Cutter

W

λ_s=30°
γ_s= 5°

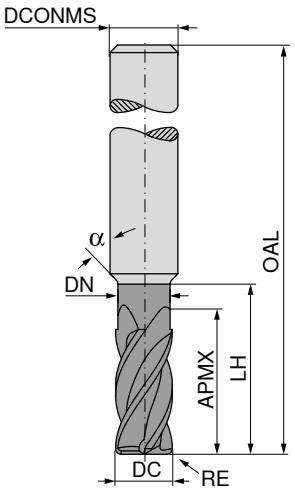



Factory standard

Factory standard

DC f8	RE ±0,05	APMX	DN	LH	OAL	α°	DCONMS h5	ZEFP	50 911 ... EUR V0/5A		50 911 ... EUR V0/5A	
mm	mm	mm	mm	mm	mm		mm					
10	1,5	18	9,6	58	100	45	10	4			383,80	**102**
10	2,0	18	9,6	58	100	45	10	4			383,80	**108**
10	3,0	18	9,6	58	100	45	10	4			383,80	**109**
12	0,5	16	11,5	26	73	45	12	4	388,30	**120**		
12	1,0	16	11,5	26	73	45	12	4	388,30	**121**		
12	1,5	16	11,5	26	73	45	12	4	388,30	**127**		
12	2,0	16	11,5	26	73	45	12	4	388,30	**123**		
12	4,0	16	11,5	26	73	45	12	4	388,30	**124**		
12	0,5	22	11,5	53	100	45	12	4			488,20	**125**
12	1,0	22	11,5	53	100	45	12	4			488,20	**126**
12	1,5	22	11,5	53	100	45	12	4			488,20	**122**
12	2,0	22	11,5	53	100	45	12	4			488,20	**128**
12	4,0	22	11,5	53	100	45	12	4			488,20	**129**

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Torus Cutter

▲ Radius accuracy: ± 0,005 mm
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °

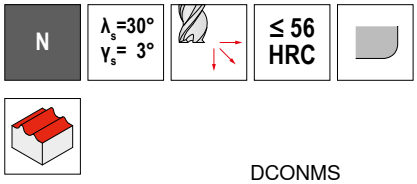

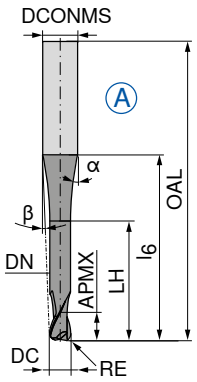

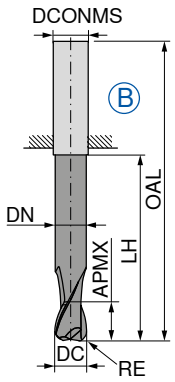



Factory standard | Factory standard

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	52 730 ... EUR V1		52 734 ... EUR V1	
0,5	0,10	1,0	0,45	2,0	20	57	10	8,5	6	2	A	173,90	**005**		
1,0	0,25	2,0	0,95	4,0	20	57	10	8	6	2	A	162,40	**010**		
1,0	0,25	2,0	0,95	4,0	40	80	4,5	4	6	2	A			172,60	**010**
1,5	0,30	2,5	1,40	7,5	20	57	12,5	7	6	2	A	155,00	**015**		
1,5	0,30	2,5	1,40	7,5	40	80	4,5	3,5	6	2	A			163,70	**015**
2,0	0,50	3,0	1,80	8,0	20	57	12	6,5	6	2	A	129,80	**020**		
2,0	0,50	3,0	1,80	8,0	40	80	4	3	6	2	A			144,30	**020**
3,0	0,50	3,5	2,80	10,0	20	57	11,5	5	6	2	A	125,30	**030**		
3,0	0,50	3,5	2,80	12,0	40	80	3,5	2,5	6	2	A			140,10	**030**
4,0	0,50	4,0	3,80	12,0	20	57	11	3,5	6	2	A	117,00	**041**		
4,0	0,50	4,0	3,80	20,0	40	80	4	1,5	6	2	A			139,00	**041**
4,0	1,00	4,0	3,80	12,0	20	57	11	3,5	6	2	A	122,70	**040**		
4,0	1,00	4,0	3,80	20,0	40	80	4	1,5	6	2	A			136,20	**040**
5,0	1,00	5,0	4,70	14,0	20	57	10	2	6	2	A	115,20	**051**		
5,0	1,00	5,0	4,70	25,0	40	80	3	1	6	2	A			137,20	**051**
5,0	1,50	5,0	4,70	14,0	20	57	10	2	6	2	A	120,40	**050**		
5,0	1,50	5,0	4,70	25,0	40	80	3	1	6	2	A			142,10	**050**
6,0	1,00	6,0	5,60	20,0		57			6	2	B	107,20	**961**		
6,0	1,00	6,0	5,60	40,0		80			6	2	B			130,60	**961**
6,0	2,00	6,0	5,60	20,0		57			6	2	B	112,30	**060**		
6,0	2,00	6,0	5,60	40,0		80			6	2	B			136,70	**060**
6,0	2,00	6,0	5,60	25,0	60	100	2	1	8	2	A			168,00	**061**
8,0	1,00	7,0	7,60	25,0		63			8	2	B	147,70	**082**		
8,0	1,00	7,0	7,60	60,0		100			8	2	B			172,60	**082**
8,0	2,00	7,0	7,60	25,0		63			8	2	B	156,60	**080**		
8,0	2,00	7,0	7,60	60,0		100			8	2	B			169,60	**080**
8,0	2,00	7,0	7,60	30,0	75	120	2	1	10	2	A			237,60	**081**
8,0	2,50	7,0	7,60	60,0		100			8	2	B			157,80	**083**
10,0	1,50	8,0	9,60	30,0		72			10	2	B	218,80	**102**		
10,0	1,50	8,0	9,60	75,0		120			10	2	B			236,10	**102**
10,0	2,50	8,0	9,60	75,0		120			10	2	B			215,80	**104**
10,0	3,00	8,0	9,60	30,0		72			10	2	B	212,90	**100**		
10,0	3,00	8,0	9,60	50,0		100			10	2	B			198,50	**103**
10,0	3,00	8,0	9,60	75,0		120			10	2	B			230,30	**100**
10,0	3,00	8,0	9,60	40,0	110	160	1	0,5	12	2	A			350,60	**101**
12,0	1,50	10,0	11,50	35,0		83			12	2	B	266,50	**122**		
12,0	1,50	10,0	11,50	70,0		160			12	2	B			344,70	**122**
12,0	4,00	10,0	11,50	35,0		83			12	2	B	270,90	**120**		
12,0	4,00	10,0	11,50	35,0	40	92	37	3,5	16	2	A	370,90	**121**		
12,0	4,00	10,0	11,50	70,0		160			12	2	B			339,00	**120**
12,0	4,00	10,0	11,50	50,0	150	200	1,5	1	16	2	A			560,70	**121**
16,0	5,00	12,0	15,50	40,0		92			16	2	B	365,10	**160**		
16,0	5,00	12,0	15,50	80,0		200			16	2	B			560,70	**160**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Torus Cutter

H | λ_s=30° γ_s= 3° | ≤ 54 HRC

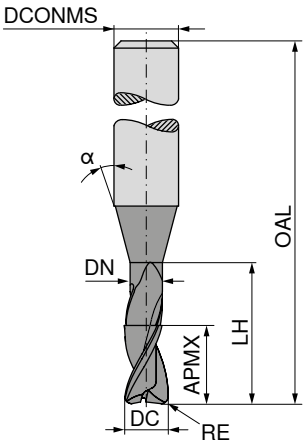





Factory standard | Factory standard

DC f8 mm	RE -0.015 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 649 ... EUR V0/5A		50 649 ... EUR V0/5A	
0,4	0,04	0,4	0,37	1,2	55	15	6	2	99,38	**041**		
0,4	0,04	0,4	0,37	2,0	55	15	6	2	100,10	**042**		
0,4	0,04	0,4	0,37	3,2	55	15	6	2	101,00	**043**		
0,4	0,04	0,4	0,45	4,0	55	15	6	2	102,60	**044**		
0,5	0,05	0,5	0,45	1,5	55	15	6	2	96,93	**051**		
0,5	0,05	0,5	0,45	2,5	55	15	6	2	97,77	**052**		
0,5	0,05	0,5	0,45	4,0	55	15	6	2	99,38	**053**		
0,5	0,05	0,5	0,45	5,0	55	15	6	2	100,10	**054**		
0,6	0,06	0,6	0,58	2,0	55	15	6	2	83,42	**061**		
0,6	0,06	0,6	0,58	3,0	55	15	6	2	83,42	**960**		
0,6	0,06	0,6	0,58	5,0	65	15	6	2			88,50	**063**
0,6	0,06	0,6	0,58	6,0	65	15	6	2	96,03	**961**		
0,8	0,08	0,8	0,77	2,5	55	15	6	2	81,12	**081**		
0,8	0,08	0,8	0,77	4,0	55	15	6	2	83,42	**980**		
0,8	0,08	0,8	0,77	6,5	65	15	6	2			90,24	**083**
0,8	0,08	0,8	0,77	8,0	65	15	6	2	96,03	**981**		
1,0	0,10	1,0	0,95	3,0	55	15	6	2	81,12	**101**		
1,0	0,10	1,0	0,95	5,0	55	15	6	2	83,42	**010**		
1,0	0,10	1,0	0,95	8,0	65	15	6	2			85,74	**103**
1,0	0,10	1,0	0,95	10,0	65	15	6	2			93,28	**011**
1,0	0,10	1,0	0,95	12,0	65	15	6	2			96,03	**105**
1,2	0,12	1,2	1,15	3,0	55	15	6	2	81,12	**121**		
1,2	0,12	1,2	1,15	6,0	55	15	6	2	83,42	**012**		
1,2	0,12	1,2	1,15	10,0	65	15	6	2	90,24	**123**		
1,2	0,12	1,2	1,15	12,0	65	15	6	2			96,03	**013**
1,3	0,13	1,3	1,25	4,0	55	15	6	2	81,12	**131**		
1,3	0,13	1,3	1,25	7,0	55	15	6	2	83,42	**132**		
1,3	0,13	1,3	1,25	11,0	65	15	6	2			90,24	**133**
1,3	0,13	1,3	1,25	13,0	65	15	6	2			96,03	**134**
1,5	0,15	1,5	1,44	5,0	55	15	6	2	83,42	**151**		
1,5	0,15	1,5	1,44	7,5	55	15	6	2	83,42	**015**		
1,5	0,15	1,5	1,44	12,0	65	15	6	2			96,03	**153**
1,5	0,15	1,5	1,44	15,0	65	15	6	2			96,03	**016**
1,6	0,16	1,6	1,52	5,0	55	15	6	2	83,42	**161**		
1,6	0,16	1,6	1,52	8,0	55	15	6	2	83,42	**162**		
1,6	0,16	1,6	1,52	13,0	65	15	6	2			90,24	**163**
1,6	0,16	1,6	1,52	16,0	65	15	6	2			96,03	**164**
1,8	0,18	1,8	1,72	5,5	55	15	6	2	81,12	**181**		
1,8	0,18	1,8	1,72	9,0	55	15	6	2	83,42	**182**		
1,8	0,18	1,8	1,72	14,5	65	15	6	2			90,24	**183**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

14

Continued on next page

Torus Cutter

H | λ_s=30° γ_s= 3° | ≤ 54 HRC

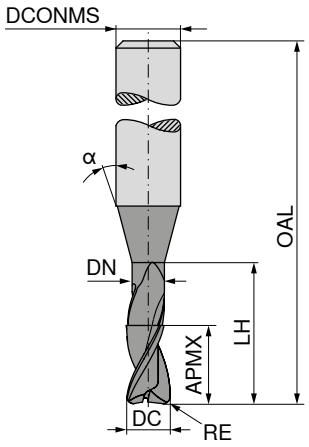

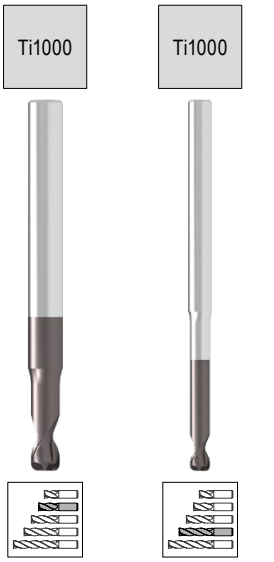

Factory standard | Factory standard

DC f8 mm	RE -0.015 mm	APMX mm	DN mm	LH mm	OAL mm	α°	DCONMS h5 mm	ZEFP	50 649 ... EUR V0/5A		50 649 ... EUR V0/5A	
1,8	0,18	1,8	1,72	18,0	65	15	6	2			96,03	**184**
2,0	0,20	2,0	1,92	6,0	55	15	6	2	81,12	**201**		
2,0	0,20	2,0	1,92	10,0	55	15	6	2	83,42	**202**		
2,0	0,20	2,0	1,92	14,0	55	15	6	2	83,42	**020**		
2,0	0,20	2,0	1,92	16,0	65	15	6	2			96,03	**204**
2,0	0,20	2,0	1,92	20,0	65	15	6	2			96,03	**021**
2,3	0,23	2,3	2,22	7,0	55	15	6	2	83,42	**231**		
2,3	0,23	2,3	2,22	11,5	55	15	6	2	85,74	**232**		
2,3	0,23	2,3	2,22	18,5	65	15	6	2			96,03	**233**
2,3	0,23	2,3	2,22	23,0	65	15	6	2			96,03	**234**
3,0	0,30	3,0	2,90	9,0	65	15	6	2	85,74	**301**		
3,0	0,30	3,0	2,90	15,0	65	15	6	2	96,03	**302**		
3,0	0,30	3,0	2,90	24,0	100	15	6	2			104,20	**303**
3,0	0,30	3,0	2,90	30,0	100	15	6	2			108,70	**304**
4,0	0,40	4,0	3,90	12,0	65	15	6	2	96,03	**401**		
4,0	0,40	4,0	3,90	20,0	65	15	6	2	96,03	**402**		
4,0	0,40	4,0	3,90	32,0	100	15	6	2			108,70	**403**
4,0	0,40	4,0	3,90	40,0	100	15	6	2			111,80	**404**
5,0	0,50	5,0	4,90	15,0	65	15	6	2	96,03	**501**		
5,0	0,50	5,0	4,90	25,0	65	15	6	2	96,03	**502**		
5,0	0,50	5,0	4,90	40,0	100	15	6	2			111,80	**503**
5,0	0,50	5,0	4,90	50,0	100	15	6	2			117,50	**504**
6,0	0,60	6,0	5,90	18,0	65	15	6	2	96,03	**601**		
6,0	0,60	6,0	5,90	30,0	100	15	6	2			108,70	**602**
6,0	0,60	6,0	5,90	48,0	100	15	6	2			117,50	**603**
6,0	0,60	6,0	5,90	60,0	100	15	6	2			121,10	**604**

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

→ v_c/f_z Page 480–486

Torus Cutter



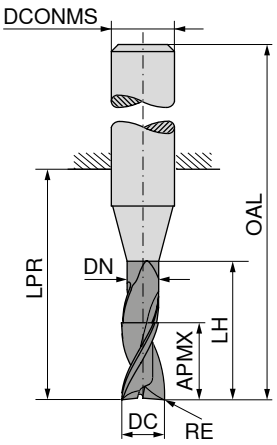

Factory standard | Factory standard | Factory standard

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 651 ... EUR V0/5A		50 651 ... EUR V0/5A		50 651 ... EUR V0/5A	
2	0,3	2	1,8	7	14	50	6	2	69,98	020				
2	0,5	2	1,8	7	14	50	6	2	69,98	021				
2	0,3	2	1,8	7	24	60	6	2			69,98	022		
2	0,5	2	1,8	7	24	60	6	2			69,98	023		
2	0,3	2	1,8	7	49	85	6	2					102,00	024
2	0,5	2	1,8	7	49	85	6	2					102,00	025
3	0,3	2	2,8	7	14	50	6	2	69,98	030				
3	0,5	2	2,8	7	14	50	6	2	69,98	031				
3	0,3	2	2,8	12	24	60	6	2			69,98	032		
3	0,5	2	2,8	12	24	60	6	2			69,98	033		
3	0,3	2	2,8	12	49	85	6	2					102,00	034
3	0,5	2	2,8	12	49	85	6	2					102,00	035
4	0,3	3	3,8	13	18	54	6	2	69,98	040				
4	0,5	3	3,8	13	18	54	6	2	69,98	041				
4	1,0	3	3,8	13	18	54	6	2	69,98	042				
4	0,3	3	3,8	20	39	75	6	2			98,07	043		
4	0,5	3	3,8	20	39	75	6	2			98,07	044		
4	1,0	3	3,8	20	39	75	6	2			98,07	045		
4	0,3	3	3,8	20	49	85	6	2					102,00	046
4	0,5	3	3,8	20	49	85	6	2					102,00	047
4	1,0	3	3,8	20	49	85	6	2					102,00	048
5	0,5	3	4,6	13	18	54	6	2	69,98	050				
5	1,0	3	4,6	13	18	54	6	2	69,98	051				
5	1,5	3	4,6	13	18	54	6	2	69,98	052				
5	1,0	3	4,6	20	39	75	6	2			98,07	053		
5	1,5	3	4,6	20	39	75	6	2			98,07	054		
6	0,5	4	5,6	14	18	54	6	2	69,98	060				
6	1,0	4	5,6	14	18	54	6	2	69,98	061				
6	2,0	4	5,6	14	18	54	6	2	69,98	062				
6	0,5	4	5,6	45	49	85	6	2			98,07	066		
6	1,0	4	5,6	45	49	85	6	2			131,90	067		
6	2,0	4	5,6	45	49	85	6	2			98,07	068		
6	0,5	4	5,6	25	64	100	6	2					113,80	069
6	1,0	4	5,6	25	64	100	6	2					113,80	070
6	2,0	4	5,6	25	64	100	6	2					113,80	071
6	0,5	4	5,6	25	49	85	8	2			131,90	063		
6	1,0	4	5,6	25	49	85	8	2			98,07	064		
6	2,0	4	5,6	25	49	85	8	2			131,90	065		
8	0,5	4	7,6	16	22	58	8	2	85,45	080				
8	1,0	4	7,6	16	22	58	8	2	85,45	081				

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–486

Continued on next page

Torus Cutter

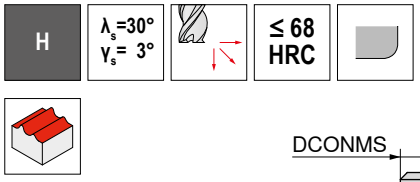

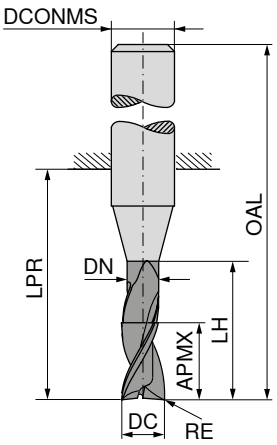

DC f8 mm	RE ±0,05 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h5 mm	ZEFP	50 651 ... EUR V0/5A		50 651 ... EUR V0/5A		50 651 ... EUR V0/5A	
8	2,0	4	7,6	16	22	58	8	2	85,45	082				
8	0,5	4	7,6	50	64	100	8	2					182,40	083
8	2,0	4	7,6	50	64	100	8	2					132,80	084
8	1,0	4	7,6	30	60	100	10	2					182,40	085
8	2,0	4	7,6	30	60	100	10	2					179,80	086
10	1,0	6	9,6	18	26	66	10	2	106,30	100				
10	3,0	6	9,6	18	26	66	10	2	106,30	101				
10	1,0	6	9,6	50	60	100	10	2			181,10	102		
10	2,0	6	9,6	50	60	100	10	2			106,30	103		
10	3,0	6	9,6	50	60	100	10	2			181,10	104		
10	1,0	6	9,6	60	80	120	10	2					217,40	105
10	2,0	6	9,6	60	80	120	10	2					181,10	106
10	3,0	6	9,6	60	80	120	10	2					223,10	107
10	1,0	6	9,6	30	75	120	12	2					281,00	108
10	2,0	6	9,6	30	75	120	12	2					281,00	109
10	3,0	6	9,6	30	75	120	12	2					281,00	110
12	1,0	8	11,5	18	28	73	12	2	156,60	120				
12	2,0	8	11,5	18	28	73	12	2	156,60	121				
12	3,0	8	11,5	18	28	73	12	2	156,60	122				
12	4,0	8	11,5	18	28	73	12	2	156,60	123				
12	1,0	8	11,5	45	55	100	12	2			233,30	124		
12	2,0	8	11,5	45	55	100	12	2			233,30	125		
12	3,0	8	11,5	45	55	100	12	2			233,30	126		
12	4,0	8	11,5	45	55	100	12	2			233,30	127		
12	1,0	8	11,5	70	75	120	12	2					281,00	128
12	2,0	8	11,5	70	75	120	12	2					281,00	129
12	3,0	8	11,5	70	75	120	12	2					281,00	130
12	4,0	8	11,5	70	75	120	12	2					281,00	131
12	1,0	8	11,5	35	102	150	16	2					567,90	132
12	2,0	8	11,5	35	102	150	16	2					567,90	133
12	3,0	8	11,5	35	102	150	16	2					567,90	134
12	4,0	8	11,5	35	102	150	16	2					567,90	135

P	●	●	●
M	○	○	○
K	●	●	●
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

→ v_c/f_z Page 480–486

Torus Cutter

▲ Radius accuracy: ± 0,005 mm
▲ High-performance tool for clearing
▲ for Ø ≤ 5.0 mm, angle tolerance α and β: ± 0.5 °



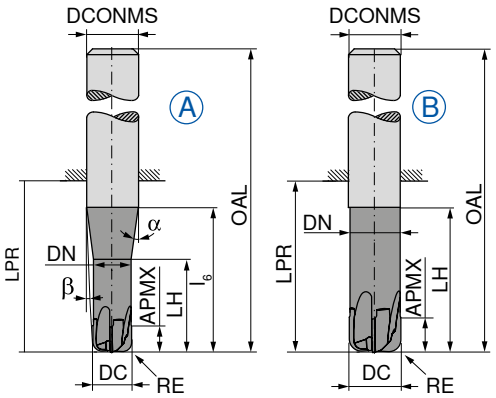

Factory standard

52 732 ...

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	LPR mm	OAL mm	α°	β°	DCONMS h5 mm	ZEFP	Fig.	EUR V1	
3	0,75	2,0	2,8	10	20	21	57	11,5	5	6	4	A	127,60	**033**
4	1,00	2,5	3,8	12	20	21	57	11	3,5	6	4	A	127,60	**044**
5	1,25	3,0	4,7	14	20	21	57	10	2	6	4	A	131,70	**055**
6	1,50	4,0	5,6	20		21	57			6	4	B	133,30	**065**
8	1,00	5,0	7,6	25		27	63			8	4	B	168,00	**084**
8	2,00	5,0	7,6	25		27	63			8	4	B	184,00	**086**
10	1,00	6,0	9,6	30		32	72			10	4	B	191,30	**104**
10	1,00	6,0	9,6	30		32	72			10	6	B	212,90	**105**
10	2,50	6,0	9,6	30		32	72			10	4	B	210,20	**107**
10	2,50	6,0	9,6	30		32	72			10	6	B	212,90	**108**
12	1,00	7,0	11,5	35		38	83			12	4	B	246,20	**124**
12	1,00	7,0	11,5	35		38	83			12	8	B	299,80	**125**
12	3,00	7,0	11,5	35		38	83			12	4	B	267,90	**128**
12	3,00	7,0	11,5	35		38	83			12	8	B	299,80	**129**
16	4,00	8,0	15,5	40		44	92			16	4	B	404,20	**169**

P	●
M	
K	○
N	
S	
H	●
O	

→ v_c/f_z Page 480–486

14

Intermediate Size Torus Cutter

▲ Reduced shank Ø for flexible application in various overhang lengths!

H | λ_s=45° γ_s=12° | ≤ 56 HRC | Ti1000

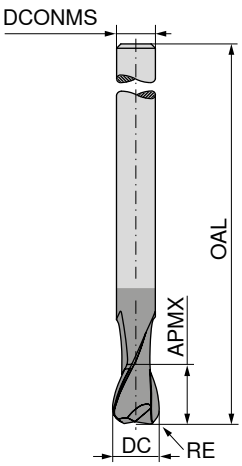

Factory standard

52 107 ...

DC e8 mm	RE ±0.01 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
7	0,5	9	120	6	4	157,80	**075**
7	1,0	9	120	6	4	157,80	**076**
7	1,5	9	120	6	4	157,80	**077**
9	0,5	12	135	8	4	204,40	**095**
9	1,0	12	135	8	4	204,40	**096**
9	1,5	12	135	8	4	204,40	**097**
11	1,0	15	150	10	4	263,60	**115**
11	1,5	15	150	10	4	263,60	**116**
11	2,0	15	150	10	4	263,60	**117**
13	1,0	18	160	12	4	337,50	**135**
13	1,5	18	160	12	4	337,50	**136**
13	2,0	18	160	12	4	337,50	**137**
15	1,0	21	160	14	4	383,80	**156**
15	1,5	21	160	14	4	383,80	**157**
15	2,0	21	160	14	4	383,80	**158**
17	1,0	24	180	16	4	459,10	**176**
17	1,5	24	180	16	4	459,10	**177**
17	2,0	24	180	16	4	459,10	**178**
17	3,0	24	180	16	4	459,10	**179**

P	○
M	●
K	○
N	●
S	●
H	
O	●

→ v_c/f_z Page 480–486

Engraving cutter 60°

W

λ_s=15°
γ_s=20°



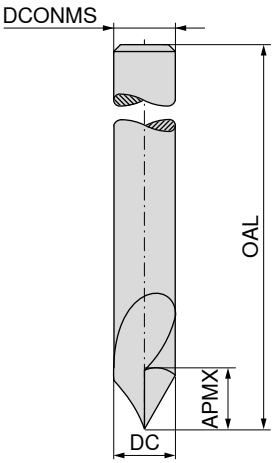

Factory standard

52 195 ...

DC h6 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
3	15	50	3	1	51,15	**030**
4	18	50	4	1	54,45	**040**
6	20	54	6	1	58,54	**060**

P	○
M	○
K	○
N	●
S	○
H	
O	●

→ v_c/f_z Page 480–483

14

NC deburring cutter

▲ 50 940 ... / 50 943 ... Point angle α = 60°
▲ 50 941 ... / 50 944 ... Point angle α = 90°
▲ 50 942 ... / 50 945 ... Point angle α = 120°



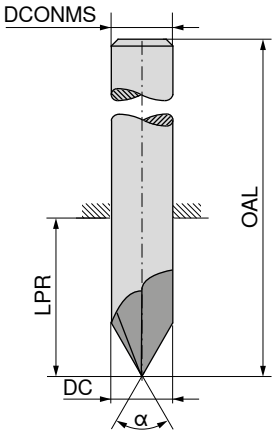

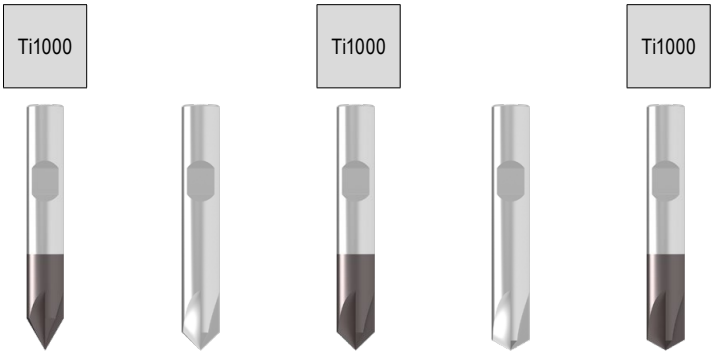

DC h6 mm	OAL mm	LPR mm	DCONMS h6 mm	ZEFP	α = 60° Factory standard		α = 60° Factory standard		α = 90° Factory standard		α = 90° Factory standard		α = 120° Factory standard		α = 120° Factory standard	
					50 940 ...		50 943 ...		50 941 ...		50 944 ...		50 942 ...		50 945 ...	
					EUR V0/5A		EUR V0/5A		EUR V0/5A		EUR V0/5A		EUR V0/5A		EUR V0/5A	
4	54	26	4	4	32,45	**040** 1)	43,32	**040** 1)	32,45	**040** 1)	43,32	**040** 1)	32,45	**040** 1)	43,32	**040** 1)
6	54	18	6	4	42,15	**060**	58,54	**060**	42,15	**060**	58,54	**060**	42,15	**060**	58,54	**060**
8	58	22	8	4	49,68	**080**	70,98	**080**	49,68	**080**	70,98	**080**	49,68	**080**	70,98	**080**
10	66	26	10	4	61,26	**100**	86,33	**100**	61,26	**100**	86,33	**100**	61,26	**100**	86,33	**100**
12	73	28	12	4	85,74	**120**	117,20	**120**	85,74	**120**	117,20	**120**	85,74	**120**	117,20	**120**
P					●		●		●		●		●		●	
M					○		○		○		○		○		○	
K					●		●		●		●		●		●	
N					○		○		○		○		○		○	
S					○		○		○		○		○		○	
H							○				○				○	
O					●		●		●		●		●		●	

1) DIN 6535 HA Shank

→ v_c/f_z Page 480–483

NC front and rear chamfer milling cutter



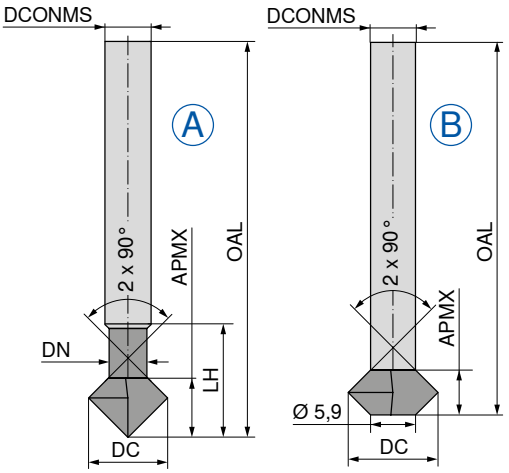

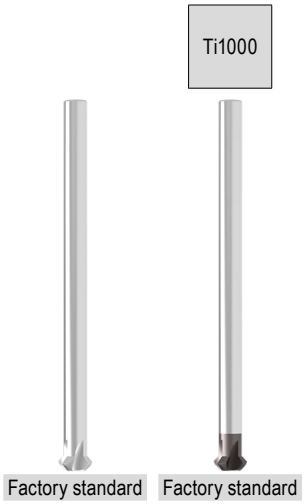

DC mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS h5 mm	ZEFP	Fig.	52 158 ... EUR V1		52 159 ... EUR V1	
3	2,0	2,2	12,0	75	4	4	A	70,82	**030**	80,10	**030**
4	2,7	2,9	17,7	75	4	4	A	70,82	**040**	81,54	**040**
5	3,0	3,9	18,0	75	5	4	A	72,57	**050**	83,14	**050**
6	4,0	3,9	19,0	100	6	4	A	88,50	**060**	99,38	**060**
8	2,0			100	6	4	B	115,30	**080**	128,90	**080**
10	4,0			100	6	4	B	143,70	**100**	160,70	**100**
12	6,0			100	6	4	B	172,60	**120**	191,30	**120**
P								●		●	
M								○		○	
K								●		●	
N								○		○	
S								○		○	
H										○	
O								●		●	

→ v_c/f_z Page 480–483

Quarter-round profile milling cutter, concave



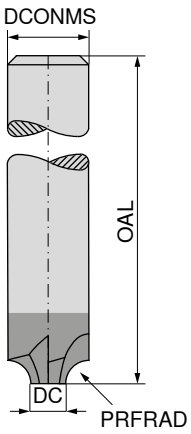

Factory standard

52 249 ...

PRFRAD +/-0,02 mm	DC mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
0,50	7,0	70	8	4	155,00	**005**
1,00	6,0	70	8	4	155,00	**010**
1,25	7,5	75	10	4	169,60	**012**
1,50	7,0	75	10	4	165,20	**015**
2,00	6,0	75	10	4	165,20	**020**
2,50	7,0	73	12	4	184,00	**025**
3,00	6,0	73	12	4	184,00	**030**
3,50	9,0	80	16	4	231,70	**035**
4,00	8,0	80	16	4	231,70	**040**
4,50	7,0	80	16	4	231,70	**045**
5,00	10,0	80	20	4	330,30	**050**
6,00	8,0	80	20	4	330,30	**060**

P	●
M	○
K	●
N	○
S	○
H	○
O	●

→ v_c/f_z Page 480–483

T-slot milling cutters

▲ Solid carbide cutting head with soldered steel shank
▲ For slots according to DIN 650
▲ **until the tool is fully in use, the feed rate fz must be reduced by 50%**

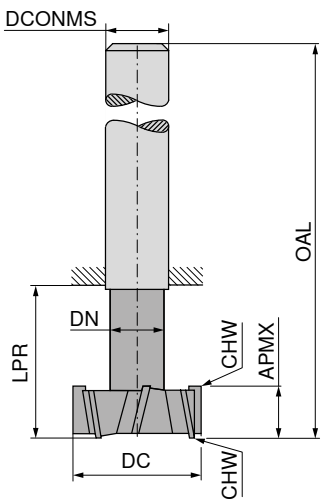

DIN 851 A

54 065 ...

DC e9 mm	APMX d11 mm	DN mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V3	
11,0	4	4	13,5	53,5	10	0,10	6	243,70	**11000**
12,5	6	5	17,0	57,0	10	0,10	6	255,10	**12500**
16,0	8	7	22,0	62,0	10	0,20	6	304,90	**16000**
18,0	8	8	25,0	70,0	12	0,20	6	318,90	**18000**
19,0	9	8	26,0	71,0	12	0,20	6	328,20	**19000**
21,0	9	10	29,0	74,0	12	0,25	6	339,00	**21000**
22,0	10	10	30,0	75,0	12	0,25	6	366,00	**22000**
25,0	11	12	34,0	82,0	16	0,30	8	400,90	**25000**
28,0	12	13	37,0	85,0	16	0,30	8	451,40	**28000**
32,0	14	15	42,0	90,0	16	0,35	8	498,90	**32000**
36,0	16	17	47,0	103,0	25	0,40	8	574,70	**36000**
40,0	18	19	52,0	108,0	25	0,40	10	662,90	**40000**

P	●
M	○
K	●
N	
S	
H	
O	

→ v_c/f_z Page 455

Information on applications can be found in the Technical Information on → **page 488.**

Carbide burrs, similar to DIN 8033

Teeth **Z3**: Application "medium"

Teeth **Z6**: Application "medium"

v_c in min = 300–600

KSJ



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 928 ... EUR U9		50 928 ... EUR U9	
6	5	52	6	60°	14,94	606	16,51	706
12	10	60	6	60°	20,14	612 1)	22,16	712 1)

1) Steel shank / carbide head – shank tolerance h9

KSK



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 927 ... EUR U9		50 927 ... EUR U9	
6	3	52	6	90°	14,27	606	15,78	706
12	6	56	6	90°	17,39	612 1)	19,26	712 1)

1) Steel shank / carbide head – shank tolerance h9

ZYA



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	50 921 ... EUR U9		50 921 ... EUR U9	
3	13	40	3	7,16	303	7,88	403
6	13	48	3	13,04	306 1)	14,27	406 1)
6	16	55	6	14,77	606	16,22	706
8	20	65	6	18,84	608 1)	20,72	708 1)
10	20	65	6	21,44	610 1)	23,17	710 1)
12	25	70	6	27,53	612 1)	30,28	712 2)

1) Steel shank / carbide head – shank tolerance h9
2) Steel shank / carbide head – shank tolerance h7

WRC



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	50 922 ... EUR U9		50 922 ... EUR U9	
3	13	40	3	9,02	303	9,93	403
6	13	48	3	14,63	306 1)	16,22	406 1)
6	16	50	6	16,51	606	18,24	706
8	18	63	6	21,01	608 1)	23,17	708 1)
10	20	65	6	24,34	610 1)	26,66	710 1)
12	25	70	6	33,03	612 1)	36,35	712 1)
16	25	70	6	44,04	616 1)	48,37	716 1)

1) Steel shank / carbide head – shank tolerance h9

SKM



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 926 ... EUR U9		50 926 ... EUR U9	
3	14	40	3	9,5°	8,73	303	9,56	403
6	13	48	3	23,0°	12,25	306 1)	13,39	406 1)
6	18	50	6	16,0°	15,50	606	16,96	706
8	20	65	6	20,0°	14,63	608 1)	16,22	708 1)
10	20	65	6	25,0°	17,39	610 1)	19,26	710 1)
12	25	70	6	25,0°	23,90	612 1)	26,07	712 1)

1) Steel shank / carbide head – shank tolerance h9

KEL



Z3

Z6

DC mm	APMX mm	OAL mm	DCONMS mm	PRFA	50 923 ... EUR U9		50 923 ... EUR U9	
3	14	40	3	6°	8,73	303	9,56	403
6	20	55	3	12°	14,94	306 1)	16,51	406 1)
6	20	50	6	10°	16,51	606	18,24	706
8	20	65	6	14°	23,48	608 1)	25,78	708 1)
10	20	65	6	14°	29,11	610 1)	31,74	710 1)
12	30	75	6	14°	34,91	612 1)	38,09	712 1)

1) Steel shank / carbide head – shank tolerance h9

Carbide burrs, similar to DIN 8033

Teeth **Z3**: Application "medium"

Teeth **Z6**: Application "medium"

v_c in min = 300–600

SPG



Z3

Z6

DC	APMX	OAL	DCONMS	50 925 ... EUR U9		50 925 ... EUR U9	
mm	mm	mm	mm				
3	13	40	3	8,45	303	9,25	403
6	13	48	3	12,62	306 1)	13,90	406 1)
6	18	50	6	18,70	606	20,43	706
8	20	65	6	18,84	608 1)	20,72	708 1)
10	20	65	6	23,48	610 1)	25,78	710 1)
12	25	70	6	27,53	612 2)	30,43	712 1)

1) Steel shank / carbide head – shank tolerance h9
2) Steel shank / carbide head – shank tolerance h7

RBF



Z3

Z6

DC	APMX	OAL	DCONMS	50 924 ... EUR U9		50 924 ... EUR U9	
mm	mm	mm	mm				
3	13	40	3	8,73	303	9,56	403
6	13	48	3	13,90	306 1)	15,34	406 1)
6	18	50	6	19,26	606	21,44	706
8	20	65	6	20,57	608 1)	22,75	708 1)
10	20	65	6	23,90	610 1)	26,22	710 1)
12	25	70	6	28,97	612 1)	31,56	712 1)
16	30	75	6	41,28	616 1)	45,36	716 1)

1) Steel shank / carbide head – shank tolerance h9

TRE



Z3

Z6

DC	APMX	OAL	DCONMS	50 929 ... EUR U9		50 929 ... EUR U9	
mm	mm	mm	mm				
3	7	40	3	8,73	303	9,56	403
6	10	45	3	12,99	306 1)	14,15	406 1)
6	10	50	6	17,52	606	19,41	706
8	13	58	6	19,55	608 1)	21,57	708 1)
10	16	61	6	22,30	610 1)	24,62	710 1)
12	20	65	6	28,11	612 1)	30,70	712 1)

1) Steel shank / carbide head – shank tolerance h9

KUD



Z3

Z6

DC	APMX	OAL	DCONMS	50 930 ... EUR U9		50 930 ... EUR U9	
mm	mm	mm	mm				
3	2,7	40,0	3	8,73	303	9,56	403
6	5,4	40,4	3	11,75	306 1)	12,99	406 1)
6	5,0	50,0	6	16,96	606	18,84	706
8	7,2	52,2	6	16,22	608 1)	17,52	708 1)
10	9,0	54,0	6	18,97	610 1)	20,72	710 1)
12	10,8	55,8	6	22,75	612 1)	25,20	712 1)
16	14,4	59,4	6	32,45	616 1)	35,64	716 1)

1) Steel shank / carbide head – shank tolerance h9

WKN



Z3

Z6

DC	APMX	OAL	DCONMS	PRFA	50 931 ... EUR U9		50 931 ... EUR U9	
mm	mm	mm	mm					
3	7	40	3	10°	8,73	303	9,56	403
6	7	50	6	10°	16,22	606	17,67	706
12	13	58	6	20°	21,75	612 1)	23,90	712 1)

1) Steel shank / carbide head – shank tolerance h9

14

Solid carbide circular saw blades, fine-toothed, DIN 1837A

▲ fine-straight-cut





DIN 1837 A

54 700 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	EUR V6	
15	0,20	5	64	18,97	102
15	0,25	5	64	18,97	103
15	0,30	5	64	18,97	104
15	0,35	5	64	18,97	105
15	0,40	5	64	18,97	106
15	0,50	5	48	18,97	107
15	0,60	5	48	18,97	108
15	0,70	5	48	22,61	109
15	0,80	5	40	22,61	110
15	0,90	5	40	23,17	111
15	1,00	5	40	24,05	112
15	1,10	5	40	25,06	113
15	1,20	5	40	25,06	114
15	1,30	5	40	25,06	115
15	1,40	5	40	25,06	116
15	1,50	5	40	27,25	117
15	1,60	5	40	29,26	118
15	1,70	5	40	31,74	119
15	1,80	5	40	31,74	120
15	1,90	5	40	33,03	121
15	2,00	5	40	33,46	122
15	2,50	5	40	46,21	123
15	3,00	5	40	52,30	124
15	3,50	5	40	59,09	125
15	4,00	5	40	72,86	126
15	4,50	5	40	85,45	127
15	5,00	5	40	88,94	128
15	5,50	5	40	106,20	129
15	6,00	5	40	109,40	130
20	0,20	5	80	20,57	152
20	0,25	5	64	20,57	153
20	0,30	5	64	20,57	154
20	0,35	5	64	20,57	155
20	0,40	5	64	20,57	156
20	0,50	5	48	20,57	157
20	0,60	5	48	20,57	158
20	0,70	5	48	24,05	159
20	0,80	5	48	24,05	160
20	0,90	5	40	25,06	161
20	1,00	5	40	27,25	162
20	1,10	5	40	29,26	163
20	1,20	5	40	29,26	164
20	1,30	5	40	30,84	165
20	1,40	5	40	33,46	166
20	1,50	5	40	33,46	167
20	1,60	5	40	35,06	168
20	1,70	5	40	36,94	169
20	1,80	5	32	36,94	170
20	1,90	5	32	38,68	171
20	2,00	5	32	38,68	172
20	2,50	5	32	48,83	173
20	3,00	5	32	55,64	174
20	3,50	5	24	62,58	175
20	4,00	5	24	74,47	176
20	4,50	5	24	88,94	177

54 700 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	EUR V6	
20	5,00	5	24	92,56	178
20	5,50	5	24	107,60	179
20	6,00	5	24	111,10	180
25	0,20	8	80	20,28	202
25	0,25	8	80	20,28	203
25	0,30	8	80	20,28	204
25	0,35	8	64	20,28	205
25	0,40	8	64	20,28	206
25	0,50	8	64	23,61	207
25	0,60	8	64	23,61	208
25	0,70	8	48	26,22	209
25	0,80	8	48	29,26	210
25	0,90	8	48	31,74	211
25	1,00	8	48	31,74	212
25	1,10	8	48	36,51	213
25	1,20	8	48	36,51	214
25	1,30	8	40	38,09	215
25	1,40	8	40	39,69	216
25	1,50	8	40	39,69	217
25	1,60	8	40	43,73	218
25	1,70	8	40	43,73	219
25	1,80	8	40	45,49	220
25	1,90	8	40	48,67	221
25	2,00	8	40	50,13	222
25	2,50	8	40	60,83	223
25	3,00	8	32	79,24	224
25	3,50	8	32	87,36	225
25	4,00	8	32	98,66	226
25	4,50	8	32	113,00	227
25	5,00	8	32	119,40	228
25	5,50	8	24	135,90	229
25	6,00	8	24	142,30	230
30	0,20	8	100	26,22	252
30	0,25	8	100	26,22	253
30	0,30	8	80	26,22	254
30	0,35	8	80	26,22	255
30	0,40	8	80	26,22	256
30	0,50	8	80	27,53	257
30	0,60	8	64	27,53	258
30	0,70	8	64	33,33	259
30	0,80	8	64	36,51	260
30	0,90	8	64	39,69	261
30	1,00	8	64	39,69	262
30	1,10	8	64	44,64	263
30	1,20	8	48	43,90	264
30	1,30	8	48	45,36	265
30	1,40	8	48	49,40	266
30	1,50	8	48	49,40	267
30	1,60	8	48	52,58	268
30	1,70	8	48	52,58	269
30	1,80	8	48	54,03	270
30	1,90	8	48	55,64	271
30	2,00	8	48	59,09	272
30	2,50	8	40	69,38	273
30	3,00	8	40	82,57	274
30	3,50	8	40	93,73	275
30	4,00	8	40	105,20	276
30	4,50	8	32	121,20	277
30	5,00	8	32	127,80	278
30	5,50	8	32	144,00	279
30	6,00	8	32	150,60	280

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 469

Solid carbide circular saw blades, fine-toothed, DIN 1837A

▲ fine-straight-cut







DIN 1837 A

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	54 700 ... EUR V6	
40	0,20	10	128	32,14	302
40	0,25	10	100	32,14	303
40	0,30	10	100	32,14	304
40	0,35	10	100	32,14	305
40	0,40	10	100	34,05	306
40	0,50	10	80	37,09	307
40	0,60	10	80	37,09	308
40	0,70	10	80	42,44	309
40	0,80	10	80	44,18	310
40	0,90	10	64	44,18	311
40	1,00	10	64	45,64	312
40	1,10	10	64	47,08	313
40	1,20	10	64	48,83	314
40	1,30	10	64	49,68	315
40	1,40	10	64	52,87	316
40	1,50	10	64	54,45	317
40	1,60	10	64	55,77	318
40	1,70	10	48	59,09	319
40	1,80	10	48	60,53	320
40	1,90	10	48	62,28	321
40	2,00	10	48	62,28	322
40	2,50	10	48	80,10	323
40	3,00	10	48	92,72	324
40	3,50	10	48	103,60	325
40	4,00	10	40	114,90	326
40	4,50	10	40	130,40	327
40	5,00	10	40	138,40	328
40	5,50	10	40	155,00	329
40	6,00	10	40	163,70	330
50	0,20	13	128	52,87	352
50	0,25	13	128	51,15	353
50	0,30	13	128	43,44	354
50	0,35	13	100	43,44	355
50	0,40	13	100	43,44	356
50	0,50	13	100	44,91	357
50	0,60	13	100	44,91	358
50	0,70	13	80	47,08	359
50	0,80	13	80	51,15	360
50	0,90	13	80	52,87	361
50	1,00	13	80	54,45	362
50	1,10	13	80	55,77	363
50	1,20	13	80	57,51	364
50	1,30	13	64	64,46	365
50	1,40	13	64	65,90	366
50	1,50	13	64	69,26	367
50	1,60	13	64	70,70	368
50	1,70	13	64	71,73	369
50	1,80	13	64	76,32	370
50	1,90	13	64	76,32	371
50	2,00	13	64	78,66	372
50	2,50	13	64	96,03	373
50	3,00	13	48	111,50	374
50	3,50	13	48	127,30	375
50	4,00	13	48	135,10	376
50	4,50	13	48	156,60	377
50	5,00	13	48	165,20	378
50	5,50	13	40	184,00	379
50	6,00	13	40	191,30	380
63	0,20	16	160	77,64	402
63	0,25	16	160	74,74	403
63	0,30	16	128	69,53	404
63	0,35	16	128	65,75	405
63	0,40	16	128	59,54	406
63	0,50	16	128	58,08	407
63	0,60	16	100	59,54	408
63	0,70	16	100	67,07	409
63	0,80	16	100	73,88	410
63	0,90	16	100	74,74	411
63	1,00	16	100	76,20	412
63	1,10	16	80	79,24	413
63	1,20	16	80	81,99	414
63	1,30	16	80	84,01	415
63	1,40	16	80	85,33	416
63	1,50	16	80	86,78	417
63	1,60	16	80	91,13	418
63	1,70	16	80	95,75	419
63	1,80	16	80	97,34	420
63	1,90	16	80	101,50	421
63	2,00	16	80	105,00	422
63	2,50	16	64	126,20	423
63	3,00	16	64	142,80	424
63	3,50	16	64	163,70	425
63	4,00	16	64	179,80	426
63	4,50	16	64	205,70	427
63	5,00	16	48	214,40	428
63	5,50	16	48	240,60	429
63	6,00	16	48	249,20	430
80	0,30	22	160	132,40	45400
80	0,35	22	160	129,20	45500
80	0,40	22	160	123,70	45600
80	0,50	22	128	93,07	45700
80	0,60	22	128	90,32	45800
80	0,70	22	128	97,66	45900
80	0,80	22	128	97,66	46000
80	0,90	22	100	101,70	46100
80	1,00	22	100	101,70	46200
80	1,10	22	100	104,40	46300
80	1,20	22	100	109,00	46400
80	1,30	22	100	113,60	46500
80	1,40	22	100	117,80	46600
80	1,50	22	100	120,60	46700
80	1,60	22	100	123,70	46800
80	1,70	22	80	133,70	46900
80	1,80	22	80	135,20	47000
80	1,90	22	80	138,00	47100
80	2,00	22	80	142,60	47200
80	2,50	22	80	168,50	47300
80	3,00	22	80	202,00	47400
80	3,50	22	64	223,40	47500
80	4,00	22	64	242,30	47600
80	4,50	22	64	285,80	47700
80	5,00	22	64	294,50	47800
80	5,50	22	64	326,60	47900
80	6,00	22	64	335,10	48000

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 469

14

Solid carbide circular saw blades, fine-toothed, DIN 1837A

▲ fine-straight-cut







DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	54 700 ... EUR V6	
200	1,5	32	160	939,50	71700
200	1,6	32	160	955,70	71800
200	2,0	32	160	1.131,00	72200
200	2,5	32	160	1.309,00	72300
200	3,0	32	128	1.485,00	72400
200	4,0	32	128	1.855,00	72600

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 469

DIN 1837 A

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	54 700 ... EUR V6	
100	0,5	22	160	175,70	50700
100	0,6	22	160	168,20	50800
100	0,7	22	128	161,60	50900
100	0,8	22	128	147,70	51000
100	0,9	22	128	144,80	51100
100	1,0	22	128	139,10	51200
100	1,1	22	128	145,70	51300
100	1,2	22	128	153,60	51400
100	1,3	22	100	163,20	51500
100	1,4	22	100	170,00	51600
100	1,5	22	100	175,00	51700
100	1,6	22	100	184,60	51800
100	1,7	22	100	194,30	51900
100	1,8	22	100	194,30	52000
100	1,9	22	100	211,80	52100
100	2,0	22	100	216,70	52200
100	2,5	22	100	255,50	52300
100	3,0	22	80	300,40	52400
100	3,5	22	80	341,10	52500
100	4,0	22	80	374,80	52600
100	4,5	22	80	437,90	52700
100	5,0	22	80	453,10	52800
100	5,5	22	64	517,20	52900
100	6,0	22	64	532,50	53000
125	0,6	22	160	267,40	55800
125	0,7	22	160	262,50	55900
125	0,8	22	160	257,70	56000
125	0,9	22	160	255,70	56100
125	1,0	22	160	234,80	56200
125	1,1	22	128	243,00	56300
125	1,2	22	128	258,40	56400
125	1,3	22	128	283,80	56500
125	1,4	22	128	283,80	56600
125	1,5	22	128	296,00	56700
125	1,6	22	128	306,30	56800
125	1,7	22	128	331,80	56900
125	1,8	22	128	331,80	57000
125	1,9	22	128	357,40	57100
125	2,0	22	128	357,40	57200
125	2,5	22	100	433,70	57300
125	3,0	22	100	512,30	57400
125	3,5	22	100	587,90	57500
125	4,0	22	100	669,80	57600
125	4,5	22	100	750,70	57700
125	5,0	22	80	774,80	57800
125	5,5	22	80	921,90	57900
125	6,0	22	80	948,20	58000
160	1,0	32	160	467,20	66200
160	1,2	32	160	493,90	66400
160	1,5	32	160	515,10	66700
160	1,6	32	160	525,70	66800
160	2,0	32	128	678,30	67200
160	2,5	32	128	773,70	67300
160	3,0	32	128	887,00	67400
160	4,0	32	128	1.162,00	67600

Solid carbide circular saw blades, coarse-toothed, DIN 1838B

▲ coarse straight-cut





DIN 1838 B

54 701 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	EUR V6	
15	0,20	5	20	18,08	**10200**
15	0,25	5	20	18,08	**10300**
15	0,30	5	20	18,08	**10400**
15	0,35	5	20	18,08	**10500**
15	0,40	5	20	18,08	**10600**
15	0,50	5	20	18,08	**10700**
15	0,60	5	20	18,08	**10800**
15	0,70	5	20	21,53	**10900**
15	0,80	5	20	21,53	**11000**
15	0,90	5	20	22,07	**11100**
15	1,00	5	20	22,91	**11200**
15	1,10	5	20	23,88	**11300**
15	1,20	5	20	23,88	**11400**
15	1,30	5	20	23,88	**11500**
15	1,40	5	20	23,88	**11600**
15	1,50	5	20	25,96	**11700**
15	1,60	5	20	27,87	**11800**
15	1,70	5	20	30,21	**11900**
15	1,80	5	20	30,21	**12000**
15	1,90	5	20	31,45	**12100**
15	2,00	5	20	31,87	**12200**
15	2,50	5	20	44,01	**12300**
15	3,00	5	20	49,80	**12400**
15	3,50	5	20	56,28	**12500**
15	4,00	5	20	69,39	**12600**
15	4,50	5	20	81,40	**12700**
15	5,00	5	20	84,70	**12800**
15	5,50	5	20	101,10	**12900**
15	6,00	5	20	104,20	**13000**
20	0,20	5	20	19,59	**15200**
20	0,25	5	20	19,59	**15300**
20	0,30	5	20	19,59	**15400**
20	0,35	5	20	19,59	**15500**
20	0,40	5	20	19,59	**15600**
20	0,50	5	20	19,59	**15700**
20	0,60	5	20	19,59	**15800**
20	0,70	5	20	22,91	**15900**
20	0,80	5	20	22,91	**16000**
20	0,90	5	20	23,88	**16100**
20	1,00	5	20	25,96	**16200**
20	1,10	5	20	27,87	**16300**
20	1,20	5	20	27,87	**16400**
20	1,30	5	20	29,38	**16500**
20	1,40	5	20	31,87	**16600**
20	1,50	5	20	31,87	**16700**
20	1,60	5	20	33,39	**16800**
20	1,70	5	20	35,16	**16900**
20	1,80	5	20	35,16	**17000**
20	1,90	5	20	36,83	**17100**
20	2,00	5	20	36,83	**17200**
20	2,50	5	20	46,48	**17300**
20	3,00	5	20	52,98	**17400**
20	3,50	5	20	59,60	**17500**
20	4,00	5	20	70,92	**17600**
20	4,50	5	20	84,70	**17700**

54 701 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	EUR V6	
20	5,00	5	20	88,14	**17800**
20	5,50	5	20	102,50	**17900**
20	6,00	5	20	105,80	**18000**
25	0,20	8	20	19,31	**20200**
25	0,25	8	20	19,31	**20300**
25	0,30	8	20	19,31	**20400**
25	0,35	8	20	19,31	**20500**
25	0,40	8	20	19,31	**20600**
25	0,50	8	20	22,48	**20700**
25	0,60	8	20	22,48	**20800**
25	0,70	8	20	24,97	**20900**
25	0,80	8	20	27,87	**21000**
25	0,90	8	20	30,21	**21100**
25	1,00	8	20	30,21	**21200**
25	1,10	8	20	34,78	**21300**
25	1,20	8	20	34,78	**21400**
25	1,30	8	20	36,27	**21500**
25	1,40	8	20	37,80	**21600**
25	1,50	8	20	37,80	**21700**
25	1,60	8	20	41,65	**21800**
25	1,70	8	20	41,65	**21900**
25	1,80	8	20	43,32	**22000**
25	1,90	8	20	46,36	**22100**
25	2,00	8	20	47,73	**22200**
25	2,50	8	20	57,95	**22300**
25	3,00	8	20	75,47	**22400**
25	3,50	8	20	83,20	**22500**
25	4,00	8	20	93,96	**22600**
25	4,50	8	20	107,60	**22700**
25	5,00	8	20	113,70	**22800**
25	5,50	8	20	129,40	**22900**
25	6,00	8	20	135,60	**23000**
30	0,20	8	30	24,97	**25200**
30	0,25	8	30	24,97	**25300**
30	0,30	8	30	24,97	**25400**
30	0,35	8	30	24,97	**25500**
30	0,40	8	30	24,97	**25600**
30	0,50	8	30	26,21	**25700**
30	0,60	8	30	26,21	**25800**
30	0,70	8	30	31,75	**25900**
30	0,80	8	24	34,78	**26000**
30	0,90	8	24	37,80	**26100**
30	1,00	8	24	37,80	**26200**
30	1,10	8	24	42,50	**26300**
30	1,20	8	24	41,80	**26400**
30	1,30	8	24	43,19	**26500**
30	1,40	8	24	47,06	**26600**
30	1,50	8	24	47,06	**26700**
30	1,60	8	24	50,09	**26800**
30	1,70	8	24	50,09	**26900**
30	1,80	8	24	51,45	**27000**
30	1,90	8	24	52,98	**27100**
30	2,00	8	24	56,28	**27200**
30	2,50	8	24	66,09	**27300**
30	3,00	8	24	78,63	**27400**
30	3,50	8	24	89,27	**27500**
30	4,00	8	24	100,20	**27600**
30	4,50	8	24	115,50	**27700**
30	5,00	8	24	121,70	**27800**
30	5,50	8	24	137,10	**27900**
30	6,00	8	24	143,40	**28000**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 469

14

Solid carbide circular saw blades, coarse-toothed, DIN 1838B

▲ coarse straight-cut





DIN 1838 B

54 701 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	EUR V6	
40	0,20	10	40	30,62	30200
40	0,25	10	40	30,62	30300
40	0,30	10	40	30,62	30400
40	0,35	10	40	30,62	30500
40	0,40	10	40	32,43	30600
40	0,50	10	40	35,32	30700
40	0,60	10	40	35,32	30800
40	0,70	10	40	40,43	30900
40	0,80	10	32	42,07	31000
40	0,90	10	32	42,07	31100
40	1,00	10	32	43,46	31200
40	1,10	10	32	44,84	31300
40	1,20	10	32	46,48	31400
40	1,30	10	32	47,31	31500
40	1,40	10	32	50,36	31600
40	1,50	10	32	51,86	31700
40	1,60	10	32	53,11	31800
40	1,70	10	32	56,28	31900
40	1,80	10	32	57,66	32000
40	1,90	10	32	59,31	32100
40	2,00	10	32	59,31	32200
40	2,50	10	32	76,27	32300
40	3,00	10	32	88,31	32400
40	3,50	10	32	98,64	32500
40	4,00	10	32	109,40	32600
40	4,50	10	32	124,20	32700
40	5,00	10	32	131,80	32800
40	5,50	10	32	147,60	32900
40	6,00	10	32	156,00	33000
50	0,20	13	48	50,36	35200
50	0,25	13	48	48,70	35300
50	0,30	13	48	41,39	35400
50	0,35	13	48	41,39	35500
50	0,40	13	48	41,39	35600
50	0,50	13	48	42,76	35700
50	0,60	13	48	42,76	35800
50	0,70	13	40	44,84	35900
50	0,80	13	40	48,70	36000
50	0,90	13	40	50,36	36100
50	1,00	13	40	51,86	36200
50	1,10	13	40	53,11	36300
50	1,20	13	40	54,77	36400
50	1,30	13	32	61,40	36500
50	1,40	13	32	62,75	36600
50	1,50	13	32	65,95	36700
50	1,60	13	32	67,33	36800
50	1,70	13	32	68,30	36900
50	1,80	13	32	72,70	37000
50	1,90	13	32	72,70	37100
50	2,00	13	32	74,90	37200
50	2,50	13	32	91,48	37300
50	3,00	13	24	106,20	37400
50	3,50	13	24	121,30	37500
50	4,00	13	24	128,70	37600
50	4,50	13	24	149,10	37700

54 701 ...

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	EUR V6	
50	5,00	13	24	157,30	37800
50	5,50	13	20	175,30	37900
50	6,00	13	20	182,10	38000
63	0,30	16	64	66,21	40400
63	0,35	16	64	62,62	40500
63	0,40	16	64	56,71	40600
63	0,50	16	64	55,31	40700
63	0,60	16	48	56,71	40800
63	0,70	16	48	63,88	40900
63	0,80	16	48	70,36	41000
63	0,90	16	48	71,18	41100
63	1,00	16	48	72,57	41200
63	1,10	16	40	75,47	41300
63	1,20	16	40	78,09	41400
63	1,30	16	40	80,01	41500
63	1,40	16	40	81,26	41600
63	1,50	16	40	82,64	41700
63	1,60	16	40	86,79	41800
63	1,70	16	40	91,18	41900
63	1,80	16	40	92,72	42000
63	1,90	16	40	96,71	42100
63	2,00	16	40	100,00	42200
63	2,50	16	32	120,20	42300
63	3,00	16	32	136,10	42400
63	3,50	16	32	156,00	42500
63	4,00	16	32	171,20	42600
63	4,50	16	32	195,90	42700
63	5,00	16	24	204,20	42800
63	5,50	16	24	229,10	42900
63	6,00	16	24	237,30	43000
80	0,30	22	64	132,40	45400
80	0,35	22	64	129,20	45500
80	0,40	22	64	123,70	45600
80	0,50	22	64	93,07	45700
80	0,60	22	64	90,32	45800
80	0,70	22	64	97,66	45900
80	0,80	22	64	97,66	46000
80	0,90	22	48	101,70	46100
80	1,00	22	48	101,70	46200
80	1,10	22	48	104,40	46300
80	1,20	22	48	109,00	46400
80	1,30	22	48	113,60	46500
80	1,40	22	48	117,80	46600
80	1,50	22	48	120,60	46700
80	1,60	22	48	123,70	46800
80	1,70	22	40	133,70	46900
80	1,80	22	40	135,20	47000
80	1,90	22	40	138,00	47100
80	2,00	22	40	142,60	47200
80	2,50	22	40	168,50	47300
80	3,00	22	40	202,00	47400
80	3,50	22	32	223,40	47500
80	4,00	22	32	242,30	47600
80	4,50	22	32	285,80	47700
80	5,00	22	32	294,50	47800
80	5,50	22	32	326,60	47900
80	6,00	22	32	335,10	48000

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 469

Solid carbide circular saw blades, coarse-toothed, DIN 1838B

▲ coarse straight-cut





DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	54 701 ... EUR V6	
200	1,5	32	80	939,50	71700
200	1,6	32	80	955,70	71800
200	2,0	32	80	1.131,00	72200
200	2,5	32	80	1.309,00	72300
200	3,0	32	64	1.485,00	72400
200	4,0	32	64	1.855,00	72600

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 469

DIN 1838 B

DC js15 mm	OAH ±0,01 mm	DCONMS H6 mm	ZEFP	54 701 ... EUR V6	
100	0,5	22	80	175,70	50700
100	0,6	22	80	168,20	50800
100	0,7	22	80	161,60	50900
100	0,8	22	64	147,70	51000
100	0,9	22	64	144,80	51100
100	1,0	22	64	139,10	51200
100	1,1	22	64	145,70	51300
100	1,2	22	64	153,60	51400
100	1,3	22	48	163,20	51500
100	1,4	22	48	170,00	51600
100	1,5	22	48	175,00	51700
100	1,6	22	48	184,60	51800
100	1,7	22	48	194,30	51900
100	1,8	22	48	194,30	52000
100	1,9	22	48	211,80	52100
100	2,0	22	48	216,70	52200
100	2,5	22	48	255,50	52300
100	3,0	22	40	300,40	52400
100	3,5	22	40	341,10	52500
100	4,0	22	40	374,80	52600
100	4,5	22	40	437,90	52700
100	5,0	22	40	453,10	52800
100	5,5	22	32	517,20	52900
100	6,0	22	32	532,50	53000
125	0,6	22	80	267,40	55800
125	0,7	22	80	262,50	55900
125	0,8	22	80	257,70	56000
125	0,9	22	80	255,70	56100
125	1,0	22	80	234,80	56200
125	1,1	22	64	243,00	56300
125	1,2	22	64	258,40	56400
125	1,3	22	64	283,80	56500
125	1,4	22	64	283,80	56600
125	1,5	22	64	296,00	56700
125	1,6	22	64	306,30	56800
125	1,7	22	64	331,80	56900
125	1,8	22	64	331,80	57000
125	1,9	22	64	357,40	57100
125	2,0	22	64	357,40	57200
125	2,5	22	48	433,70	57300
125	3,0	22	48	512,30	57400
125	3,5	22	48	587,90	57500
125	4,0	22	48	669,80	57600
125	4,5	22	40	750,70	57700
125	5,0	22	40	774,80	57800
125	5,5	22	40	921,90	57900
125	6,0	22	40	948,20	58000
160	1,0	32	80	467,20	66200
160	1,2	32	80	493,90	66400
160	1,5	32	80	515,10	66700
160	1,6	32	80	525,70	66800
160	2,0	32	64	678,30	67200
160	2,5	32	64	773,70	67300
160	3,0	32	64	887,00	67400
160	4,0	32	48	1.162,00	67600

Cylindrical shank adapter for circular saw blades

▲ DCONWS = circular saw blade bore diameter

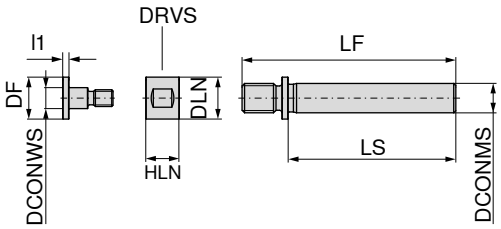

DCONWS h7 mm	DCONMS h7 mm	DLN mm	DF mm	LF mm	LS mm	HLN mm	l_1 mm	DRVS mm	72 900 ... EUR X1	
5	7	10	10	51	40	8	3	9	129,60	**005**
5	10	10	10	61	50	8	3	9	129,60	**105**
8	7	15	15	51	40	8	3	14	129,60	**008**
8	10	15	15	61	50	8	3	14	140,70	**108**
10	7	17	17	53	40	10	3	16	129,60	**010**
10	10	17	17	63	50	10	3	16	140,70	**110**
10	16	17	17	74	55	10	3	16	150,10	**210**
13	10	20	20	66	50	10	3	18	140,70	**113**
13	16	20	20	77	55	10	3	18	150,10	**213**
16	10	24	24	66	50	14	3	22	140,70	**116**
16	16	24	24	79	55	14	3	22	150,10	**216**

Screw – SR

Lock nut – KM

Spare parts for Article no.	72 945 ... EUR X1		72 945 ... EUR X1	
72 900 005	24,61	**000**	38,67	**005**
72 900 105	24,61	**000**	38,67	**005**
72 900 008	24,61	**001**	38,67	**006**
72 900 108	24,61	**001**	38,67	**006**
72 900 010	26,22	**002**	40,14	**007**
72 900 110	26,22	**002**	40,14	**007**
72 900 210	26,22	**010**	40,14	**012**
72 900 113	27,45	**003**	41,51	**008**
72 900 213	27,45	**003**	41,51	**008**
72 900 116	28,80	**004**	42,70	**009**
72 900 216	28,80	**011**	42,70	**013**

Application data for plastics cutters

Material	Strength N/mm² – HB	50 983 … 50 984 … 50 985 … 50 986 …	50 932 …	50 937 …	50 936 …	50 938 …	50 610 … 50 611 …	50 946 …	50 948 …	50 947 …
Aluminium (non alloyed, low alloyed)	< 350 N/mm²						●			
Aluminium	< 500 N/mm²						●			
Aluminium alloy 0,5–10% Si	< 400 N/mm²						●			
Aluminium alloy 10 - 15% Si	< 400 N/mm²					●		●	●	●
Aluminium	< 400 N/mm²					●		●	●	
Copper (non alloyed, low alloyed)	< 350 N/mm²						●			
Copper wrought alloys	< 700 N/mm²					●		●	●	●
Special copper alloys	< 200 HB					●		●	●	●
Special copper alloys	< 300 HB					●		●	●	●
Special copper alloys	< 300 HB					●		●	●	●
Short-chipping brass, bronze, red bronze	< 600 N/mm²						●			
Long-chipping brass	< 600 N/mm²						●			
Magnesium and Magnesium Alloys	< 850 N/mm²					●		●	●	●
Tungsten and tungsten alloys									●	●
Molybdenum and molybdenum alloys									●	●
Thermoplastics							●			
Duroplastics		●	●	●			●			
Fibre-reinforced plastics		●	●	●	●	●		●	●	●
Graphite		●	●	●	●	●		●		●
Machining direction		↘	↘	↘	↘	↘	↘	↘	↘	↘
		1	2	3	4	5	6	7	8	9

Tips



1 ▲ Very sharp cutting edges for GFK and CFK and to prevent delamination of the component.

2 ▲ For excellent tool life when machining AFK, CFK and Graphite.

3 ▲ Specialist for machining honeycomb materials; Milling of pockets not fully through the workpiece.

4

5 ▲ Specialist for machining honeycomb materials.

▲ Milling of recesses that pass through the material, the lower deck is pushed and upper deck pulled therefore the workpiece material is stabilized.

6 ▲ For machining non fibre-reinforced plastics and non-ferrous metals with low silicon content. (PE, PA, PVC, acrylic glass)

7

8 ▲ For machining fibre-reinforced plastics and non-ferrous metals with high silicon content.

9

14

Cutter for plastics

- ▲ right hand cutting
- ▲ cross-pitched
- ▲ Downward chip evacuation
- ▲ 50 983 ... = fine pitch
- ▲ 50 984 ... = medium pitch



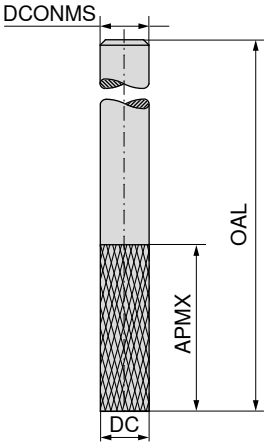





Factory standard | Factory standard

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	50 983 ... EUR V0		50 984 ... EUR V0	
2,0	7	40	2,0	22,89	020	23,75	020
2,0	7	50	6,0	41,43	021	41,43	021
3,0	10	40	3,0	22,89	030	23,75	030
3,0	12	50	6,0	41,43	031	41,43	031
3,5	12	40	3,5	24,93	035	25,95	035
4,0	15	40	4,0	26,94	040	28,54	040
4,0	20	50	6,0	41,43	041	41,43	041
4,5	15	50	4,5	31,56	045	32,88	045
5,0	16	50	5,0	35,78	050	37,24	050
5,0	25	75	6,0	61,73	051	61,73	051
6,0	18	50	6,0	41,43	060	39,84	060
6,0	35	75	6,0	61,73	061	61,73	061
7,0	22	60	7,0	56,78	070	54,75	070
8,0	25	63	8,0	65,34	080	62,86	080
8,0	40	100	8,0	85,74	081	85,74	081
9,0	25	63	9,0	81,99	090	78,52	090
10,0	30	72	10,0	86,64	100	83,60	100
12,0	32	83	12,0	122,40	120	117,20	120
14,0	32	83	14,0	199,90	140	194,30	140
16,0	36	92	16,0	273,80	160	262,20	160
18,0	40	92	18,0	372,40	180	357,90	180
20,0	45	104	20,0	444,60	200	428,80	200
P							
M							
K							
N							
S							
H							
O					●		●

→ v_c/f_z Page 418

Cutter for plastics

- ▲ right hand cutting
- ▲ cross-pitched
- ▲ Downward chip evacuation
- ▲ 50 985 ... = fine pitch
- ▲ 50 986 ... = medium pitch



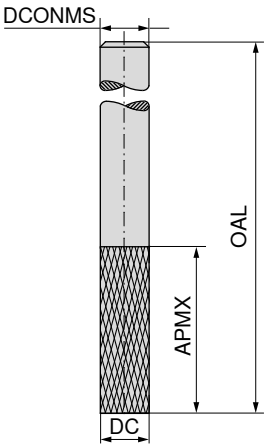

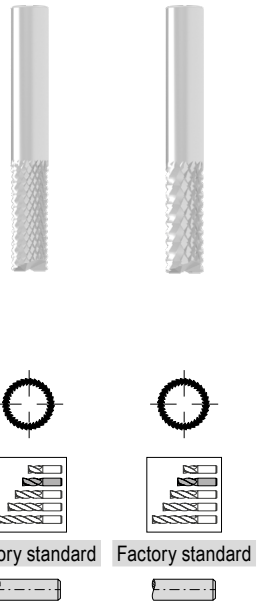

Factory standard | Factory standard

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	50 985 ... EUR V0		50 986 ... EUR V0	
2,0	7	40	2,0	23,90	**020**	24,93	**020**
2,0	7	50	6,0	44,04	**021**	44,04	**021**
3,0	10	40	3,0	23,90	**030**	24,93	**030**
3,0	12	50	6,0	44,04	**031**	44,04	**031**
3,5	12	40	3,5	26,37	**035**	27,53	**035**
4,0	15	40	4,0	28,69	**040**	30,28	**040**
4,0	20	50	6,0	44,04	**041**	44,04	**041**
4,5	15	50	4,5	33,33	**045**	35,06	**045**
5,0	16	50	5,0	38,25	**050**	39,84	**050**
5,0	25	75	6,0	64,46	**051**	64,46	**051**
6,0	18	50	6,0	44,04	**060**	42,44	**060**
6,0	35	75	6,0	64,46	**061**	64,46	**061**
7,0	22	60	7,0	60,53	**070**	58,54	**070**
8,0	25	63	8,0	69,26	**080**	66,49	**080**
8,0	40	100	8,0	89,95	**081**	89,95	**081**
9,0	25	63	9,0	85,74	**090**	82,43	**090**
10,0	30	72	10,0	90,39	**100**	86,64	**100**
12,0	32	83	12,0	127,10	**120**	121,50	**120**
14,0	32	83	14,0	204,40	**140**	197,00	**140**
16,0	36	92	16,0	281,00	**160**	265,30	**160**
18,0	40	92	18,0	378,10	**180**	362,30	**180**
20,0	45	104	20,0	454,90	**200**	434,50	**200**

P		
M		
K		
N		
S		
H		
O	●	●

→ v_c/f_z Page 418

Ball nosed cutter for plastics

▲ right hand cutting
▲ cross-pitched

W



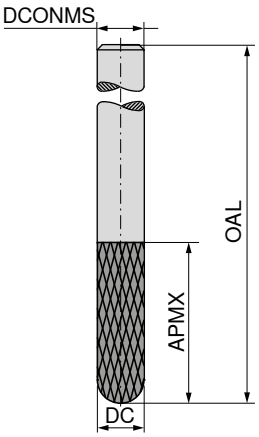

DIAMOND

Factory standard

50 932 ...

DC $_{h10}$ mm	APMX mm	OAL mm	DCONMS $_{h6}$ mm	EUR V0	
2	7	40	2	83,60	**020**
2	7	50	6	170,90	**022**
3	10	40	3	83,60	**030**
3	12	50	6	170,90	**032**
4	15	40	4	121,00	**040**
4	20	50	6	170,90	**042**
5	16	50	5	155,00	**050**
5	25	75	6	197,00	**052**
6	18	50	6	160,70	**060**
6	35	75	6	188,40	**062**
8	25	63	8	201,40	**080**
8	40	100	8	265,30	**082**
10	30	72	10	292,50	**100**
12	32	83	12	370,90	**120**
16	36	92	16	746,00	**160**
20	40	104	20	879,20	**200**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 418

Cutter for plastics

▲ right hand cutting
▲ cross-pitched



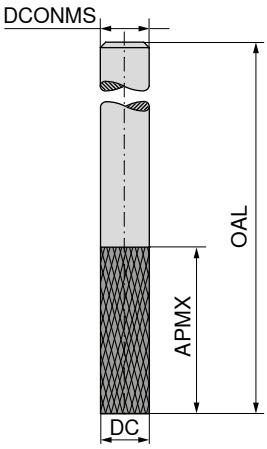



Factory standard

50 937 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	EUR V0	
5	16	60	6	179,80	**050**
5	28	75	6	221,60	**052**
6	20	60	6	198,50	**060**
6	35	75	6	221,60	**062**
8	22	63	8	244,80	**080**
8	40	100	8	297,00	**082**
10	25	72	10	311,60	**100**
10	50	100	10	373,60	**102**
12	30	83	12	388,30	**120**
12	50	100	12	457,80	**122**
16	35	92	16	686,60	**160**
16	60	125	16	837,40	**162**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 418

14

Cutter for honeycomb materials



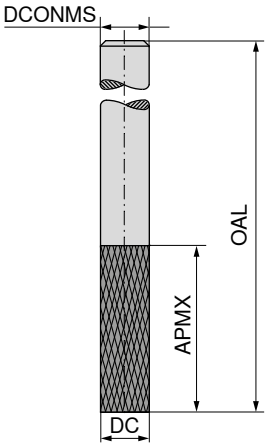

Factory standard

50 936 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	EUR V0	
6	16	50	6	99,67	**006**
8	19	63	8	146,30	**008**
10	22	72	10	185,40	**010**
12	26	83	12	253,30	**012**
16	17	100	12	456,40	**016**
20	17	100	12	625,70	**020**
24	10	100	12	741,70	**024**
24	17	100	12	801,00	**025**

P	
M	
K	
N	
S	
H	
O	●

→ v_c/f_z Page 418

Right and left hand helix cutter for fibre re-inforced plastics



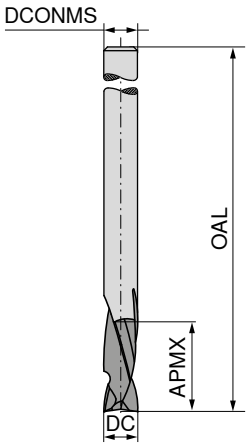

Ti28

Factory standard

50 938 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
2	6	40	6	2	166,60	**020**
3	12	40	3	2	81,12	**030**
3	12	50	6	2	166,60	**032**
4	14	40	4	2	92,27	**040**
5	16	50	5	2	115,80	**050**
6	18	50	6	2	140,90	**060**
8	20	63	8	2	170,90	**080**
10	25	72	10	2	204,40	**100**
12	30	83	12	2	297,00	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

Single flute cutter

▲ With polished chip flutes

W

λ_s=25°
γ_s=25°

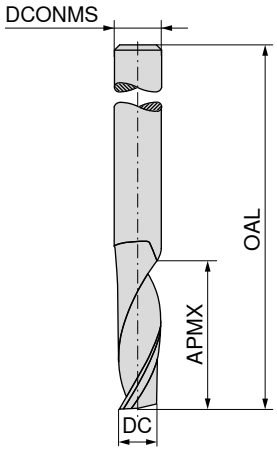

Right-hand helix
right-hand cutting
Factory standard

Left-hand helix
right-hand cutting
Factory standard

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	50 610 ... EUR V0		50 611 ... EUR V0	
1,5	6	40	3,0	1	35,20	015	35,20	015
2,0	10	40	2,0	1	21,88	020	21,88	020
2,0	6	40	3,0	1	35,20	019	35,20	019
2,0	10	60	6,0	1	52,00	022	52,00	022
2,0	12	60	6,0	1	53,42	024	53,42	024
2,5	6	40	2,5	1	35,20	025	35,20	025
3,0	12	60	6,0	1	52,00	034	52,00	034
3,0	12	40	3,0	1	23,48	030	23,48	030
3,0	10	40	6,0	1	50,99	032	50,99	032
3,0	15	60	6,0	1	52,00	036	52,00	036
4,0	20	75	6,0	1	84,15	044	84,15	044
4,0	15	40	4,0	1	28,38	040	28,38	040
4,0	15	60	6,0	1	52,00	042	52,00	042
5,0	16	60	6,0	1	52,00	052	52,00	052
5,0	16	50	5,0	1	36,35	050	36,35	050
5,0	28	75	6,0	1	94,31	054	94,31	054
6,0	20	60	6,0	1	42,00	060	42,00	060
6,0	30	60	6,0	1	50,99	062	50,99	062
6,0	35	75	6,0	1	76,32	064	76,32	064
8,0	22	63	8,0	1	67,80	080	67,80	080
8,0	40	100	8,0	1	122,40	084	122,40	084
10,0	55	100	10,0	1	204,40	105	204,40	105
10,0	25	72	10,0	1	102,00	100	102,00	100
12,0	30	83	12,0	1	135,30	120	135,30	120
16,0	35	92	16,0	1	286,90	160	286,90	160

P		
M		
K		
N	●	●
S		
H		
O	●	●

→ v_c/f_z Page 418

Cutter for plastics

▲ With polished flutes



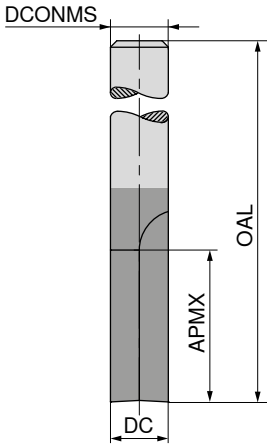

Factory standard

50 946 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
1,5	6	40	3	1	43,32	**015**
2,0	6	40	3	1	43,32	**020**
2,0	10	40	2	1	31,15	**022**
2,0	10	60	6	1	63,01	**024**
2,0	12	60	6	1	64,90	**026**
3,0	12	40	3	1	32,75	**030**
3,0	12	60	6	1	63,01	**032**
3,0	15	60	6	1	63,01	**034**
4,0	15	60	6	1	63,01	**040**
4,0	20	75	6	1	95,46	**042**
5,0	16	60	6	1	63,01	**050**
5,0	28	75	6	1	105,80	**052**
6,0	20	60	6	1	54,90	**060**
6,0	30	60	6	1	62,45	**062**
6,0	35	75	6	1	87,91	**064**
8,0	22	63	8	1	85,33	**080**
8,0	40	100	8	1	137,10	**082**
10,0	25	72	10	1	126,90	**100**
10,0	55	100	10	1	223,10	**102**
12,0	30	83	12	1	165,20	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

Cutter for plastics

▲ with polished flutes



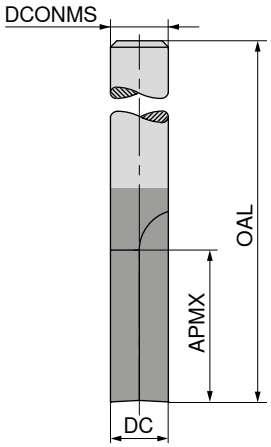



Factory standard

50 948 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
2	6	40	6	2	65,90	**020**
3	12	40	3	2	37,96	**030**
3	12	50	6	2	65,90	**031**
4	14	40	6	2	65,90	**040**
5	16	50	5	2	49,68	**050**
6	18	50	6	2	59,68	**060**
8	20	63	8	2	86,19	**080**
10	25	72	10	2	112,60	**100**
12	30	83	12	2	149,30	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

Ball nosed cutter for plastics

▲ with polished flutes
▲ irregular pitch



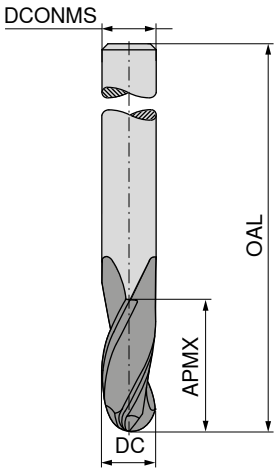



DIN 6527 L

50 947 ...

DC h10 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
3	10	57	6	3	90,39	**030**
4	13	57	6	3	90,39	**040**
5	15	57	6	3	90,39	**050**
6	18	57	6	3	77,21	**060**
8	20	63	8	3	105,80	**080**
10	25	72	10	3	142,80	**100**
12	30	83	12	3	185,40	**120**

P	
M	
K	
N	●
S	
H	
O	●

→ v_c/f_z Page 418

14

Slot milling cutter



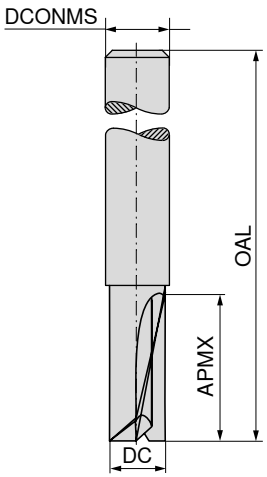

Factory standard

52 168 ...

DC e8 mm	APMX mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V1	
2	8	50	3	2	23,03	**020**
3	12	50	3	2	23,03	**030**
4	13	60	4	2	23,90	**040**
5	14	60	5	2	29,41	**050**
6	16	58	6	2	33,61	**060**
8	20	65	8	2	44,91	**080**
10	22	70	10	2	71,27	**100**
12	25	70	12	2	94,73	**120**

P	●
M	○
K	●
N	○
S	○
H	
O	●

→ v_c/f_z Page 480–483

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

14

Cutting data standard values – MonsterMill – SCR – End mill, short – long

Index	Emulsion	Compressed air	MMS	Type short	Type long	52 600 ..., 52 601 ..., 52 602 ..., 52 603 ..., 52 604 ..., 52 606 ..., 52 607 ..., 52 608 ..., 52 611 ..., 52 612 ...														
						Ø DC (mm) =								Ø DC (mm) =								
						3,0–3,5			4,0–4,5					5,0–5,5			6,0–7,5			8,0–9,5		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)						$a_{p\,max.}$ x DC		f_z (mm)								
P.1.1	90	160		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
P.1.2	90	150		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.3	90	150		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.4	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.5	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.1	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.2	90	140		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.3	80	120		1,0	1,0	0,025	0,019	0,014	0,035	0,027	0,020	1,0	1,0*	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.2.4	80	120		1,0	1,0	0,025	0,019	0,014	0,035	0,027	0,020	1,0	1,0*	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.3.1	90	140		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.2	80	130		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.3	80	110		1,0	1,0	0,022	0,017	0,013	0,031	0,024	0,018	1,0	1,0*	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.4.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
P.4.2	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.1.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.2.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.3.1	80			1,0	1,0	0,020	0,015	0,011	0,028	0,021	0,015	1,0	1,0*	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
K.1.1		200		1,0	1,0	0,040	0,031	0,022	0,055	0,043	0,031	1,0	1,0*	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.1.2		180		1,0	1,0	0,040	0,031	0,022	0,055	0,043	0,031	1,0	1,0*	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.2.1		200		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.2.2		180		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.3.1		140		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
K.3.2		140		1,0	1,0	0,028	0,022	0,016	0,040	0,031	0,022	1,0	1,0*	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1	150	280		1,0	1,0	0,031	0,024	0,017	0,043	0,033	0,024	1,0	1,0*	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
N.3.2	140	230		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.3.3	140	230		1,0	1,0	0,034	0,026	0,019	0,047	0,036	0,026	1,0	1,0*	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.4.1																						
S.1.1	45			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.1.2	45			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.1	30			0,5	0,5	0,018	0,014	0,010	0,025	0,019	0,014	0,5	0,5	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
S.2.2	30			0,5	0,5	0,016	0,007	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.3	30			0,5	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,5	0,5	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.3.1	80			0,5	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,5	0,5	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
S.3.2	60			0,5	0,5	0,025	0,019	0,014	0,035	0,027	0,019	0,5	0,5	0,050	0,037	0,025	0,066	0,049	0,033	0,09	0,07	0,04
S.3.3	60			0,5	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,5	0,5	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
H.1.1		80		0,3	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,3	0,3	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
H.1.2		60		0,15	0,15	0,016	0,012	0,009	0,022	0,017	0,012	0,15	0,15	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
H.1.3																						
H.1.4																						
H.2.1		120		0,5	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,5	0,5	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
H.3.1		80		0,3	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,3	0,3	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
O.1.1	180	300		1,0	1,0	0,067	0,052	0,038	0,094	0,073	0,053	1,0	1,0*	0,135	0,101	0,068	0,180	0,134	0,090	0,24	0,18	0,12
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

*= With an a_p of 1.5xD, the feed rate per tooth f_z should be multiplied by 0.8

SCR ball nosed cutters at full slot, reduce f_z by 25%!

Plunging angle for ramping and helical milling:
No. of teeth 4 = 4 °/No. of teeth 6 = 1°

Index	52 600 ..., 52 601 ..., 52 602 ..., 52 603 ..., 52 604 ..., 52 606 ..., 52 607 ..., 52 608 ..., 52 611 ..., 52 612 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	10,0–11,5			12,0			14,0–15,5			16,0–17,0			18,0–19,5			20,0			Emulsion	Compressed air	MMS
	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC			
	f_z (mm)																				
P.1.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
P.1.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.3	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.2.4	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.3.1	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.2	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.4.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
P.4.2	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.1.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.2.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.3.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
K.1.1	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,21	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16		●	
K.1.2	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,21	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16		●	
K.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
K.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14		●	
K.3.1	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
K.3.2	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,15	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11		●	
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,16	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
N.3.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.3.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,18	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.4.1																					
S.1.1	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07	●		
S.2.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.3	0,07	0,05	0,04	0,08	0,03	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.3.1	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
S.3.2	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,11	0,09	0,16	0,13	0,10	●		
S.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,12	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
H.1.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
H.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06		●	
H.1.3																					
H.1.4																					
H.2.1	0,09	0,07	0,05	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08		●	
H.3.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,10	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
O.1.1	0,30	0,22	0,15	0,33	0,25	0,17	0,33	0,26	0,18	0,36	0,27	0,21	0,38	0,31	0,24	0,43	0,35	0,27	●		○
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Feed rate guide values for ball nosed and torus cutters on → **Page** 486

Cutting data standard values – MonsterMill – SCR– End mill, extra long

Index	Emulsion	Compressed air	MMS	Type extra long		52 605 ... / 52 608 ...															
						Ø DC (mm) = 3			4			5			6			8			
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)															
P.1.1	80	110		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
P.1.2	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.3	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.4	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.1.5	80	110		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.1	80	90		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.2	80	90		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
P.2.3	70	80		1,0*	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.2.4	70	80		1,0*	0,5	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
P.3.1	70	80		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.2	70	80		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.3.3	70	80		1,0*	0,5	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
P.4.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
P.4.2	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.1.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.2.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
M.3.1	70			1,0*	0,5	0,020	0,015	0,011	0,028	0,021	0,015	0,040	0,030	0,020	0,053	0,039	0,026	0,07	0,05	0,04
K.1.1		160		1,0*	0,5	0,040	0,031	0,022	0,055	0,043	0,031	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.1.2		120		1,0*	0,5	0,040	0,031	0,022	0,055	0,043	0,031	0,079	0,059	0,040	0,106	0,079	0,053	0,14	0,11	0,07
K.2.1		160		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.2.2		120		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
K.3.1		100		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
K.3.2		100		1,0*	0,5	0,028	0,022	0,016	0,040	0,031	0,022	0,057	0,042	0,028	0,076	0,056	0,038	0,10	0,08	0,05
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	120	240		1,0*	0,5	0,031	0,024	0,017	0,043	0,033	0,024	0,062	0,046	0,031	0,083	0,062	0,041	0,11	0,08	0,06
N.3.2	100	200		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.3.3	100	200		1,0*	0,5	0,034	0,026	0,019	0,047	0,036	0,026	0,068	0,050	0,034	0,090	0,067	0,045	0,12	0,09	0,06
N.4.1																					
S.1.1	40			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.1.2	40			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.1	25			0,5*	0,25	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
S.2.2	25			0,5*	0,25	0,016	0,007	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.2.3	25			0,5*	0,25	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
S.3.1	60			0,5*	0,25	0,025	0,019	0,014	0,035	0,027	0,020	0,050	0,038	0,025	0,067	0,050	0,034	0,09	0,07	0,05
S.3.2	50			0,5*	0,25	0,025	0,019	0,014	0,035	0,027	0,019	0,050	0,037	0,025	0,066	0,049	0,033	0,09	0,07	0,04
S.3.3	50			0,5*	0,25	0,022	0,017	0,013	0,031	0,024	0,018	0,045	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04
H.1.1		60		0,5*	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
H.1.2		50		0,5*	0,15	0,016	0,012	0,009	0,022	0,017	0,012	0,032	0,023	0,016	0,042	0,031	0,021	0,06	0,04	0,03
H.1.3																					
H.1.4																					
H.2.1		80		0,5*	0,5	0,020	0,016	0,011	0,028	0,022	0,016	0,041	0,030	0,020	0,054	0,040	0,027	0,07	0,05	0,04
H.3.1		60		0,5*	0,3	0,018	0,014	0,010	0,025	0,019	0,014	0,036	0,027	0,018	0,048	0,036	0,024	0,06	0,05	0,03
O.1.1	120	240		1,0*	0,5	0,067	0,052	0,038	0,094	0,073	0,053	0,135	0,101	0,068	0,180	0,134	0,090	0,24	0,18	0,12
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

* = Trimming and trochoidal slot milling

Plunging angle for ramping and helical milling: No. of teeth 4 = 4 °/No. of teeth 6 = 1°

Index	52 605 ... / 52 608 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	10			12			14			16			18			20					
	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_s 0,1–0,2 x DC	a_s 0,3–0,4 x DC	a_s 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	○	●	○
P.1.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.4	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.1.5	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
P.2.3	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.2.4	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	○	●	○
P.3.1	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.2	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	○	●	○
P.4.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
P.4.2	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.1.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.2.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
M.3.1	0,09	0,07	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,10	0,08	●		
K.1.1	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,20	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16	○	●	○
K.1.2	0,18	0,13	0,09	0,19	0,14	0,10	0,19	0,15	0,11	0,20	0,16	0,12	0,22	0,18	0,14	0,25	0,20	0,16	○	●	○
K.2.1	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
K.2.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	○	●	○
K.3.1	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
K.3.2	0,13	0,09	0,06	0,14	0,10	0,07	0,14	0,11	0,08	0,14	0,11	0,09	0,16	0,13	0,10	0,18	0,15	0,11	○	●	○
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,14	0,10	0,07	0,15	0,11	0,08	0,15	0,12	0,08	0,15	0,13	0,10	0,18	0,14	0,11	0,20	0,16	0,12	●		○
N.3.2	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.3.3	0,15	0,11	0,08	0,17	0,12	0,08	0,16	0,13	0,09	0,17	0,14	0,11	0,19	0,16	0,12	0,21	0,17	0,14	●		○
N.4.1																					
S.1.1	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07	●		
S.2.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.2.3	0,07	0,05	0,04	0,08	0,03	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06	●		
S.3.1	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,10	0,07	0,12	0,10	0,08	0,14	0,12	0,09	0,16	0,13	0,10	●		
S.3.2	0,11	0,08	0,06	0,12	0,09	0,06	0,12	0,09	0,07	0,12	0,10	0,08	0,14	0,11	0,09	0,16	0,13	0,10	●		
S.3.3	0,10	0,08	0,05	0,11	0,08	0,06	0,11	0,09	0,06	0,11	0,09	0,07	0,13	0,10	0,08	0,14	0,12	0,09	●		
H.1.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
H.1.2	0,07	0,05	0,04	0,08	0,06	0,04	0,08	0,06	0,04	0,08	0,06	0,05	0,09	0,07	0,06	0,10	0,08	0,06		●	
H.1.3																					
H.1.4																					
H.2.1	0,09	0,07	0,05	0,10	0,07	0,05	0,10	0,08	0,05	0,10	0,08	0,06	0,11	0,09	0,07	0,13	0,11	0,08		●	
H.3.1	0,08	0,06	0,04	0,09	0,07	0,04	0,09	0,07	0,05	0,09	0,07	0,06	0,10	0,08	0,06	0,11	0,09	0,07		●	
O.1.1	0,30	0,22	0,15	0,33	0,25	0,17	0,33	0,26	0,18	0,33	0,27	0,21	0,38	0,31	0,24	0,43	0,35	0,27	●		○
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – MonsterMill – SCR – Torus face cutter, long

Index	v_c (m/min)	Type long $a_{p\,max.}$ x DC	52 609 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	150	1,0	0,019	0,017	0,012	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.1.2	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.1.3	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.1.4	140	1,0	0,019	0,017	0,012	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.1.5	140	1,0	0,019	0,017	0,012	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.2.1	150	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.2.2	150	1,0	0,019	0,017	0,012	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.2.3	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.2.4	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.3.1	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.3.2	150	1,0	0,024	0,021	0,015	0,029	0,022	0,016	0,040	0,030	0,020	0,048	0,036	0,024	0,06	0,05	0,03	
P.3.3	130	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
P.4.1																		
P.4.2																		
M.1.1																		
M.2.1																		
M.3.1																		
K.1.1	170	1,0	0,028	0,025	0,018	0,043	0,033	0,024	0,056	0,042	0,028	0,072	0,054	0,036	0,10	0,07	0,05	
K.1.2	170	1,0	0,028	0,025	0,018	0,043	0,033	0,024	0,056	0,042	0,028	0,072	0,054	0,036	0,10	0,07	0,05	
K.2.1	150	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,046	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04	
K.2.2	150	1,0	0,024	0,021	0,015	0,036	0,028	0,020	0,046	0,034	0,023	0,060	0,045	0,030	0,08	0,06	0,04	
K.3.1	80	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
K.3.2	80	1,0	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1	80	0,3	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
H.1.2	60	0,15	0,009	0,008	0,006	0,014	0,011	0,008	0,020	0,015	0,010	0,024	0,018	0,012	0,03	0,02	0,02	
H.1.3																		
H.1.4																		
H.2.1	100	0,5	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
H.3.1	80	0,3	0,014	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,036	0,027	0,018	0,05	0,04	0,02	
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	52 609 ... Ø DC (mm) = 10 a_e 0,1–0,2 x DC	10 a_e 0,3–0,4 x DC	10 a_e 0,6–1,0 x DC	12 a_e 0,1–0,2 x DC	12 a_e 0,3–0,4 x DC	12 a_e 0,6–1,0 x DC	16 a_e 0,1–0,2 x DC	16 a_e 0,3–0,4 x DC	16 a_e 0,6–1,0 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
	f_z (mm)											
P.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.1.2	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.1.3	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.1.4	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.1.5	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.2.1	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.2.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.2.3	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.2.4	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.3.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.3.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,08	0,06	○	●	
P.3.3	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
P.4.1												
P.4.2												
M.1.1												
M.2.1												
M.3.1												
K.1.1	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
K.1.2	0,12	0,09	0,06	0,14	0,11	0,07	0,15	0,12	0,09	○	●	
K.2.1	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
K.2.2	0,10	0,08	0,05	0,12	0,09	0,06	0,14	0,10	0,08	○	●	
K.3.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
K.3.2	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05	○	●	
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
H.1.2	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03		●	
H.1.3												
H.1.4												
H.2.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
H.3.1	0,06	0,05	0,03	0,07	0,05	0,04	0,08	0,06	0,05		●	
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

14

Cutting data standard values – MonsterMill – SCR – Torus face cutter, HSC machining

Index	v_c (m/min)	a_p x DC	a_e x DC	52 609 ... Ø DC (mm) = 3	4	5	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
				f_z (mm)										
P.1.1	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.1.2	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.1.3	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.1.4	190	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
P.1.5	190	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
P.2.1	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.2.2	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.2.3	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.2.4	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.3.1	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.3.2	200	0,04	0,5	0,090	0,120	0,150	0,180	0,24	0,30	0,36	0,48	○	●	
P.3.3	170	0,03	0,3	0,066	0,090	0,110	0,132	0,18	0,22	0,26	0,35	○	●	
P.4.1														
P.4.2														
M.1.1														
M.2.1														
M.3.1														
K.1.1	230	0,05	0,6	0,120	0,160	0,200	0,240	0,32	0,40	0,48	0,64	○	●	
K.1.2	230	0,05	0,6	0,120	0,160	0,200	0,240	0,32	0,40	0,48	0,64	○	●	
K.2.1	200	0,04	0,5	0,096	0,130	0,160	0,192	0,26	0,32	0,38	0,51	○	●	
K.2.2	200	0,04	0,5	0,096	0,130	0,160	0,192	0,26	0,32	0,38	0,51	○	●	
K.3.1	100	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
K.3.2	100	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38	○	●	
N.1.1														
N.1.2														
N.2.1														
N.2.2														
N.2.3														
N.3.1														
N.3.2														
N.3.3														
N.4.1														
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1	100	0,03	0,3	0,060	0,080	0,100	0,120	0,16	0,20	0,24	0,32		●	
H.1.2	90	0,02	0,3	0,048	0,064	0,080	0,096	0,13	0,16	0,19	0,26		●	
H.1.3	80	0,02	0,2	0,024	0,056	0,070	0,084	0,11	0,14	0,17	0,22		●	
H.1.4	60	0,02	0,2	0,036	0,048	0,060	0,072	0,10	0,12	0,14	0,19		●	
H.2.1	130	0,03	0,4	0,072	0,100	0,120	0,144	0,19	0,24	0,29	0,38		●	
H.3.1	100	0,03	0,3	0,060	0,080	0,100	0,120	0,16	0,20	0,24	0,32		●	
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

Cutting data standard values – MonsterMill – FRP CR fine pitched

Index	Compressed air	Type long	52 598 ...					● 1st choice ○ suitable		
			Ø DC (mm) =							
			> Ø 5 ≤ Ø 6	> Ø 6 ≤ Ø 8	> Ø 8 ≤ Ø 10	> Ø 10 ≤ Ø 12	> Ø 12 ≤ Ø 14			
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f (mm/rev)					Emulsion	Compressed air	MMS
O.1.1										
O.1.2										
O.2.1										
O.2.2	200	1,0	0,125	0,150	0,175	0,200	0,225		●	
O.3.1										

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

Cutting data standard values – MonsterMill – FRP CR coarse pitched

Index	Compressed air	Type long	52 599 ...					● 1st choice ○ suitable		
			Ø DC (mm) =							
			> Ø 5 ≤ Ø 6	> Ø 6 ≤ Ø 8	> Ø 8 ≤ Ø 10	> Ø 10 ≤ Ø 12	> Ø 12 ≤ Ø 14			
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f (mm/rev)					Emulsion	Compressed air	MMS
O.1.1										
O.1.2										
O.2.1										
O.2.2	200	1,5	0,100	0,120	0,140	0,160	0,180		●	
O.3.1										

For the MonsterMill FRP CR cutters, the feed rate must be selected in mm/rev.

Cutting data standard values – MonsterMill – FRP

Index	Compressed air	Type long	52 595 ..., 52 596 ..., 52 597 ...					● 1st choice ○ suitable		
			Ø DC (mm) =							
			> Ø 5 ≤ Ø 6	> Ø 6 ≤ Ø 8	> Ø 8 ≤ Ø 10	> Ø 10 ≤ Ø 12	> Ø 12 ≤ Ø 14			
			a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC	a_e 0,6–1,0 x DC			
	v_c (m/min)	$a_{p\,max.}$ x DC	f (mm/rev)					Emulsion	Compressed air	MMS
O.1.1										
O.1.2										
O.2.1										
O.2.2	200	1,0	0,018	0,022	0,026	0,03	0,034		●	
O.3.1										

The optimum usage recommendations may differ from those provided here depending on the machining process and application.Please get in touch with your contact at CERATIZIT to determine the best recommendation for your application.

Cutting data standard values – MonsterMill – ICR – End mill, short

Index	Emulsion	Compressed air	MMS	Type short	52 784 ... Ø DC (mm) = 1,5 a_e 0,1–0,2 x DC	1,5 a_e 0,3–0,4 x DC	1,5 a_e 0,6–1,0 x DC	2 a_e 0,1–0,2 x DC	2 a_e 0,3–0,4 x DC	2 a_e 0,6–1,0 x DC	2,5 a_e 0,1–0,2 x DC	2,5 a_e 0,3–0,4 x DC	2,5 a_e 0,6–1,0 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
	v_c (m/min)			$a_{p\,max.}$ x DC	f_z (mm)											
P.1.1	140	130		0,25	0,014	0,013	0,010	0,020	0,019	0,014	0,029	0,024	0,018	○	●	○
P.1.2	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.1.3	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.1.4	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.1.5	140	130		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.2.1	120			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.2.2	120	110		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	○	●	○
P.2.3	80	90		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	○	●	○
P.2.4	80	90		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	○	●	○
P.3.1	80	90		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
P.3.2	80	90		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
P.3.3	100	110		0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	○	●	○
P.4.1	100			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
P.4.2	100			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
M.1.1	**100**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
M.2.1	**80**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
M.3.1	**100**			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012	●		
K.1.1		180		0,25	0,020	0,019	0,014	0,025	0,024	0,018	0,036	0,030	0,022		●	
K.1.2		160		0,25	0,020	0,019	0,014	0,025	0,024	0,018	0,036	0,030	0,022		●	
K.2.1		180		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019		●	
K.2.2		160		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019		●	
K.3.1		120		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
K.3.2		120		0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016		●	
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1	280	280		0,25	0,007	0,007	0,005	0,020	0,019	0,014	0,029	0,024	0,018	●		○
N.3.2	220	220		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
N.3.3	220	220		0,25	0,016	0,015	0,011	0,022	0,020	0,015	0,031	0,026	0,019	●		○
N.4.1																
S.1.1	45			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
S.1.2	45			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
S.2.1	25			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
S.2.2	30			0,25	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,012	0,012	●		
S.2.3	25			0,25	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013	●		
S.3.1	80			0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015	●		
S.3.2	60			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
S.3.3	60			0,25	0,014	0,013	0,010	0,018	0,017	0,013	0,026	0,022	0,016	●		
H.1.1		80		0,20	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013		●	
H.1.2		60		0,15	0,009	0,008	0,006	0,013	0,012	0,009	0,019	0,016	0,012		●	
H.1.3																
H.1.4																
H.2.1		80		0,25	0,013	0,012	0,009	0,016	0,015	0,011	0,024	0,020	0,015		●	
H.3.1		80		0,20	0,011	0,010	0,008	0,014	0,013	0,010	0,021	0,017	0,013		●	
O.1.1	300	300		0,25	0,029	0,027	0,020	0,043	0,040	0,030	0,051	0,043	0,032	●		○
O.1.2																
O.2.1																
O.2.2																
O.3.1																

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/No. of teeth 4 = 4°/No. of teeth 5 = 3°

Cutting data standard values – MonsterMill – ICR – End mill, short – long

Index	Emulsion	Compressed air	MMS	Type short	Type long	52 784 ..., 52 786 ... Ø DC (mm) = 3 a_e 0,1–0,2 x DC	3 a_e 0,3–0,4 x DC	3 a_e 0,6–1,0 x DC	4 a_e 0,1–0,2 x DC	4 a_e 0,3–0,4 x DC	4 a_e 0,6–1,0 x DC	5 a_e 0,1–0,2 x DC	5 a_e 0,3–0,4 x DC	5 a_e 0,6–1,0 x DC	6 a_e 0,1–0,2 x DC	6 a_e 0,3–0,4 x DC	6 a_e 0,6–1,0 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)														
P.1.1	140	130		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	○	●	○
P.1.2	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.1.3	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.1.4	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.1.5	140	130		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.2.1	120	110		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.2.2	120	110		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	○	●	○
P.2.3	80	90		1,0	1,0*	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	○	●	○
P.2.4	80	90		1,0	1,0*	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	○	●	○
P.3.1	80	90		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
P.3.2	80	90		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
P.3.3	100	110		1,0	1,0*	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	○	●	○
P.4.1	100			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
P.4.2	100			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
M.1.1	**100**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
M.2.1	**80**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
M.3.1	**100**			1,0	1,0*	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
K.1.1		180		1,0	1,0*	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053		●	
K.1.2		160		1,0	1,0*	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053		●	
K.2.1		180		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045		●	
K.2.2		160		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045		●	
K.3.1		120		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
K.3.2		120		1,0	1,0*	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038		●	
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	280	280		1,0	1,0*	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,741	0,572	0,413	●		○
N.3.2	220	220		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
N.3.3	220	220		1,0	1,0*	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	●		○
N.4.1																				
S.1.1	45			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
S.1.2	45			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
S.2.1	25			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
S.2.2	30			0,5	0,5	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	●		
S.2.3	25			0,5	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	●		
S.3.1	80			0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	●		
S.3.2	60			0,5	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
S.3.3	60			0,5	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	●		
H.1.1		80		0,3	0,3	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030		●	
H.1.2		60		0,15	0,15	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026		●	
H.1.3																				
H.1.4																				
H.2.1		80		0,5	0,5	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034		●	
H.3.1		80		0,3	0,3	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030		●	
O.1.1	300	300		1,0	1,0*	0,058	0,045	0,033	0,108	0,083	0,060	0,135	0,104	0,075	0,162	0,125	0,090	●		○
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

* = with an a_p of 1.5 x d_1 the f_z should be multiplied by 0.8

Continued on the next page

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/No. of teeth 4 = 4°/No. of teeth 5 = 3°

14

Cutting data standard values – MonsterMill – ICR – End mill, short – long

Index	Emulsion	Compressed air	MMS	Type short	Type long	52 784 ..., 52 786 ... Ø DC (mm) = 8			10			12			14		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)											
P.1.1	140	130		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
P.1.2	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.1.3	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.1.4	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.1.5	140	130		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.2.1	120	110		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.2.2	120	110		1,0	1,0*	0,09	0,07	0,05	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09
P.2.3	80	90		1,0	1,0*	0,08	0,06	0,05	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08
P.2.4	80	90		1,0	1,0*	0,08	0,06	0,05	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08
P.3.1	80	90		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
P.3.2	80	90		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
P.3.3	100	110		1,0	1,0*	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
P.4.1	100			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06
P.4.2	100			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06
M.1.1	**100**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
M.2.1	**80**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
M.3.1	**100**			1,0	1,0*	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
K.1.1		180		1,0	1,0*	0,13	0,10	0,07	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12
K.1.2		160		1,0	1,0*	0,13	0,10	0,07	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12
K.2.1		180		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,14	0,11	0,08	0,19	0,15	0,11
K.2.2		160		1,0	1,0*	0,11	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,19	0,15	0,11
K.3.1		120		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
K.3.2		120		1,0	1,0*	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1	280	280		1,0	1,0*	0,10	0,08	0,06	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10
N.3.2	220	220		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
N.3.3	220	220		1,0	1,0*	0,11	0,08	0,06	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08
N.4.1																	
S.1.1	45			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
S.1.2	45			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
S.2.1	25			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
S.2.2	30			0,5	0,5	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
S.2.3	25			0,5	0,5	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,05	0,06	0,13	0,10	0,07
S.3.1	80			0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
S.3.2	60			0,5	0,5	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
S.3.3	60			0,5	0,5	0,09	0,07	0,05	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09
H.1.1		80		0,3	0,3	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
H.1.2		60		0,15	0,15	0,06	0,05	0,04	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06
H.1.3																	
H.1.4																	
H.2.1		80		0,5	0,5	0,08	0,06	0,05	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08
H.3.1		80		0,3	0,3	0,07	0,06	0,04	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07
O.1.1	300	300		1,0	1,0*	0,22	0,17	0,12	0,27	0,21	0,15	0,32	0,25	0,18	0,38	0,29	0,21
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

* = with an a_p of 1.5 x d_1 the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/No. of teeth 4 = 4°/No. of teeth 5 = 3°

Index	52 784 ..., 52 786 ...									● 1st choice ○ suitable		
	Ø DC (mm) =											
	16			18			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)									Emulsion	Compressed air	MMS
P.1.1	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
P.1.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.3	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.4	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.5	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.1	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.3	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.2.4	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.3.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.2	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.3	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.4.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
P.4.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.1.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.2.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.3.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
K.1.1	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.1.2	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.2.1	0,19	0,16	0,12	0,20	0,17	0,13	0,25	0,22	0,18		●	
K.2.2	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15		●	
K.3.1	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
K.3.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
N.3.2	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.3.3	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.4.1												
S.1.1	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.1.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.2.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.3	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.3.1	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
S.3.2	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
S.3.3	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
H.1.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10		●	
H.1.2	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09		●	
H.1.3												
H.1.4												
H.2.1	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11		●	
H.3.1	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10		●	
O.1.1	0,38	0,31	0,24	0,41	0,35	0,27	0,43	0,38	0,30	●		○
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – MonsterMill – ICR– End mill, extra long

Index	Emulsion	Compressed air	MMS	Type extra long		52 784 ...															
						Ø DC (mm) =															
						3			4			5			6			8		
						a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC		f_z (mm)															
P.1.1	120	110		1,0	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,074	0,057	0,041	0,10	0,08	0,06
P.1.2	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.1.3	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.1.4	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.1.5	120	110		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.2.1	100	90		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.2.2	100	90		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
P.2.3	70	70		1,0	0,5	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
P.2.4	70	70		1,0	0,5	0,031	0,024	0,018	0,063	0,049	0,035	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
P.3.1	70	70		1,0	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
P.3.2	70	70		1,0	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
P.3.3	85	90		1,0	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
P.4.1	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
P.4.2	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
M.1.1	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
M.2.1	70			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
M.3.1	85			1,0	0,5	0,025	0,019	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
K.1.1		150		1,0	0,5	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053	0,13	0,10	0,07
K.1.2		140		1,0	0,5	0,047	0,036	0,026	0,063	0,049	0,035	0,079	0,061	0,044	0,094	0,073	0,053	0,13	0,10	0,07
K.2.1		150		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
K.2.2		140		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
K.3.1		105		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
K.3.2		105		1,0	0,5	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	240	240		1,0	0,5	0,038	0,029	0,021	0,049	0,038	0,028	0,063	0,049	0,035	0,741	0,572	0,413	0,10	0,08	0,06
N.3.2	190	190		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
N.3.3	190	190		1,0	0,5	0,040	0,031	0,023	0,054	0,042	0,030	0,067	0,052	0,038	0,081	0,062	0,045	0,11	0,08	0,06
N.4.1																					
S.1.1	38			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
S.1.2	38			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
S.2.1	23			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
S.2.2	27			0,5	0,25	0,025	0,012	0,014	0,031	0,024	0,018	0,040	0,031	0,023	0,047	0,036	0,026	0,06	0,05	0,04
S.2.3	23			0,5	0,25	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,07	0,06	0,04
S.3.1	70			0,5	0,25	0,031	0,024	0,018	0,040	0,031	0,023	0,052	0,040	0,029	0,061	0,047	0,034	0,08	0,06	0,05
S.3.2	50			0,5	0,25	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
S.3.3	50			0,5	0,25	0,034	0,026	0,019	0,045	0,035	0,025	0,056	0,043	0,031	0,067	0,052	0,038	0,09	0,07	0,05
H.1.1		70		0,5*		0,027	0,021		0,036	0,028		0,045	0,035		0,054	0,042		0,07	0,06	
H.1.2		50		0,5*		0,025	0,019		0,031	0,024		0,040	0,031		0,047	0,036		0,06	0,05	
H.1.3																					
H.1.4																					
H.2.1		70		0,5*		0,031	0,024		0,040	0,031		0,052	0,040		0,061	0,047		0,08	0,06	
H.3.1		70		0,5*		0,027	0,021		0,036	0,028		0,045	0,035		0,054	0,042		0,07	0,06	
O.1.1	250	250		1,0	0,5	0,058	0,045	0,033	0,108	0,083	0,060	0,135	0,104	0,075	0,162	0,125	0,090	0,22	0,17	0,12
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

*= Edge Milling and Trochoidal Milling

Plunging angle for ramping and helical milling: No. of teeth 3 = 5 °/No. of teeth 4 = 4°/No. of teeth 5 = 3°

Index	52 784 ... Ø DC (mm) = 10			12			14			16			18			20			● 1st choice ○ suitable		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	○	●	○
P.1.2	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.3	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.4	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.1.5	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.1	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.2	0,12	0,09	0,07	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	○	●	○
P.2.3	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.2.4	0,11	0,09	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	○	●	○
P.3.1	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.2	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.3.3	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	○	●	○
P.4.1	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
P.4.2	0,08	0,06	0,04	0,10	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.1.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.2.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
M.3.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
K.1.1	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.1.2	0,14	0,10	0,08	0,16	0,13	0,09	0,22	0,17	0,12	0,22	0,18	0,14	0,24	0,20	0,16	0,25	0,22	0,18		●	
K.2.1	0,14	0,10	0,08	0,14	0,11	0,08	0,19	0,15	0,11	0,19	0,16	0,12	0,20	0,17	0,13	0,25	0,22	0,18		●	
K.2.2	0,12	0,09	0,07	0,14	0,11	0,08	0,19	0,15	0,11	0,19	0,16	0,12	0,20	0,17	0,13	0,22	0,19	0,15		●	
K.3.1	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
K.3.2	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13		●	
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,12	0,10	0,07	0,15	0,11	0,08	0,17	0,13	0,10	0,18	0,14	0,11	0,19	0,16	0,12	0,20	0,17	0,14	●		○
N.3.2	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.3.3	0,14	0,10	0,08	0,16	0,13	0,09	0,14	0,11	0,08	0,19	0,16	0,12	0,21	0,17	0,14	0,22	0,19	0,15	●		○
N.4.1																					
S.1.1	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.1.2	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.1	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.2.2	0,08	0,06	0,04	0,09	0,07	0,05	0,11	0,09	0,06	0,11	0,09	0,07	0,12	0,10	0,08	0,13	0,11	0,09	●		
S.2.3	0,09	0,07	0,05	0,11	0,05	0,06	0,13	0,10	0,07	0,13	0,10	0,08	0,14	0,12	0,09	0,14	0,13	0,10	●		
S.3.1	0,10	0,08	0,06	0,12	0,09	0,07	0,14	0,11	0,08	0,14	0,12	0,09	0,15	0,13	0,10	0,16	0,14	0,11	●		
S.3.2	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
S.3.3	0,11	0,09	0,06	0,14	0,10	0,08	0,16	0,12	0,09	0,16	0,13	0,10	0,17	0,15	0,11	0,18	0,16	0,13	●		
H.1.1	0,09	0,07		0,11	0,08		0,13	0,10		0,13	0,10		0,14	0,12		0,14	0,13			●	
H.1.2	0,08	0,06		0,09	0,07		0,11	0,09		0,11	0,09		0,12	0,10		0,13	0,11			●	
H.1.3																					
H.1.4																					
H.2.1	0,10	0,08		0,12	0,09		0,14	0,11		0,14	0,12		0,16	0,13		0,16	0,14			●	
H.3.1	0,09	0,07		0,11	0,08		0,13	0,10		0,13	0,10		0,14	0,12		0,14	0,13			●	
O.1.1	0,27	0,21	0,15	0,32	0,25	0,18	0,38	0,29	0,21	0,38	0,31	0,24	0,41	0,35	0,27	0,43	0,38	0,30	●		○
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – MonsterMill – TCR – End mill

Index	Type long	Type extra long	Type long	Type extra long	52 504 ..., 52 508 ...											
					Ø DC (mm) =											
					4			5			6			8		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC		f_z (mm)											
P.4.1	110	88	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
P.4.2	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
M.1.1	110	88	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
M.2.1	80	64	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
M.3.1	100	80	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,05	0,037	0,025
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1	**80**	**96**	1,0	0,5	0,022	0,017	0,012	0,032	0,024	0,016	0,042	0,031	0,021	0,050	0,037	0,025
S.3.2	**70**	**80**	1,0	0,5	0,020	0,015	0,010	0,030	0,022	0,014	0,040	0,029	0,019	0,048	0,035	0,022
S.3.3	**60**	**64**	1,0	0,5	0,150	0,010	0,008	0,025	0,018	0,010	0,035	0,025	0,015	0,040	0,030	0,018

Cutting data standard values – MonsterMill – TCR – End mill

Index	Type long	Type long	52 506 ...											
			Ø DC (mm) =											
			4		5		6		8		10		12	
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.4.1	110	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
P.4.2	100	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
M.1.1	110	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
M.2.1	80	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
M.3.1	100	1,0	0,022	0,017	0,032	0,024	0,042	0,031	0,05	0,037	0,064	0,048	0,08	0,06
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	**80**	**1,0**	0,022	0,017	0,032	0,024	0,042	0,031	0,050	0,037	0,064	0,048	0,080	0,060
S.3.2	**70**	**1,0**	0,020	0,015	0,030	0,022	0,040	0,029	0,048	0,035	0,062	0,046	0,078	0,058
S.3.3	**60**	**1,0**	0,150	0,010	0,025	0,018	0,035	0,025	0,040	0,030	0,055	0,035	0,070	0,050

Index	52 504 ..., 52 508 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.4.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
P.4.2	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
M.1.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
M.2.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
M.3.1	0,064	0,048	0,032	0,08	0,06	0,04	0,085	0,065	0,045	0,111	0,09	0,07	●	○	
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,064	0,048	0,032	0,080	0,060	0,040	0,085	0,065	0,045	0,111	0,090	0,070	●		
S.3.2	0,062	0,046	0,030	0,078	0,058	0,038	0,083	0,063	0,043	0,109	0,088	0,068	●		
S.3.3	0,055	0,035	0,025	0,070	0,050	0,030	0,075	0,055	0,035	0,100	0,080	0,060	●		

Index	52 506 ...				● 1st choice ○ suitable		
	Ø DC (mm) =						
	16		20				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	f_z (mm)						
P.4.1	0,085	0,065	0,111	0,09	●	○	
P.4.2	0,085	0,065	0,111	0,09	●	○	
M.1.1	0,085	0,065	0,111	0,09	●	○	
M.2.1	0,085	0,065	0,111	0,09	●	○	
M.3.1	0,085	0,065	0,111	0,09	●	○	
S.1.1							
S.1.2							
S.2.1							
S.2.2							
S.2.3							
S.3.1	0,085	0,065	0,111	0,090	●		
S.3.2	0,083	0,063	0,109	0,088	●		
S.3.3	0,075	0,055	0,100	0,080	●		

Cutting data standard values – MonsterMill – TCR – Ball-nosed end mill

Index	Type long	Type extra long		52 514 ...											
				Ø DC (mm) =											
				2		3		4		5		6		8	
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)											
P.4.1	110	65	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
P.4.2	100	60	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
M.1.1	110	65	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
M.2.1	80	55	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
M.3.1	100	60	0,1 - 0,2	0,015	0,011	0,018	0,012	0,02	0,015	0,02	0,015	0,03	0,02	0,04	0,03
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	**80**	**60**	0,1 - 0,2	0,017	0,013	0,02	0,014	0,022	0,017	0,022	0,017	0,034	0,025	0,053	0,042
S.3.2	**70**	**50**	0,1 - 0,2	0,014	0,011	0,017	0,012	0,019	0,014	0,019	0,014	0,029	0,022	0,046	0,036
S.3.3	**60**	**40**	0,1 - 0,2	0,012	0,009	0,014	0,01	0,016	0,012	0,016	0,012	0,024	0,018	0,038	0,03

Cutting data standard values – MonsterMill – TCR – Torus face cutter

● 1st choice
○ suitable

Index	Type long	Type extra long		52 512 ...									Emulsion	Compressed air	MMS
				Ø DC (mm) =											
				2	3	4	5	6	8	10	12	16			
				a_e 0,1–1,0 x DC											
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)											
P.4.1	120	110	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
P.4.2	110	100	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
M.1.1	120	110	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
M.2.1	100	90	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
M.3.1	110	100	0,06	0,025	0,04	0,06	0,07	0,09	0,11	0,13	0,18	0,22	●	○	
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	**130**	**120**	0,06	0,025	0,040	0,060	0,070	0,090	0,11	0,13	0,18	0,22	●		
S.3.2	**110**	**100**	0,06	0,020	0,035	0,055	0,065	0,085	0,10	0,12	0,16	0,20	●		
S.3.3	**90**	**80**	0,06	0,015	0,030	0,050	0,060	0,080	0,09	0,11	0,15	0,18	●		

Index	52 514 ...						● 1st choice ○ suitable		
	Ø DC (mm) =								
	10		12		16				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	f_z (mm)								
P.4.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
P.4.2	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
M.1.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
M.2.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
M.3.1	0,05	0,04	0,06	0,05	0,07	0,06	●	○	
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1	0,059	0,046	0,066	0,056	0,073	0,063	●		
S.3.2	0,05	0,04	0,056	0,048	0,062	0,054	●		
S.3.3	0,042	0,033	0,047	0,04	0,052	0,045	●		

14

Cutting data standard values – MonsterMill – NCR – End mill, long

Index	ZEFP = 4			Type long	53 030 ...											
					Ø DC (mm) =											
					4			5			6			8		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			$a_{p\,max.}$ x DC	f_z (mm)											
M.1.1	120	100	70	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
M.2.1	100	80	60	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
M.3.1	120	100	70	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.1.1	**50**	**40**	**30**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.1.2	**50**	**40**	**30**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.2.1	**35**	**30**	**25**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.2.2	**35**	**30**	**25**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.2.3	**35**	**30**	**25**	1,0	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03
S.3.1	**120**	**100**	**80**	1,0	0,04	0,03	0,02	0,05	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04
S.3.2	**100**	**80**	**60**	1,0	0,04	0,03	0,02	0,05	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04
S.3.3	**80**	**70**	**60**	1,0	0,04	0,03	0,02	0,05	0,04	0,03	0,05	0,04	0,03	0,07	0,06	0,04

Plunging angle for ramping and helical milling: 3°

Index	ZEFP = 5	Type long	53 031 ...												● 1st choice ○ suitable		
			Ø DC (mm) =														
			6		8		10		12		16		20				
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)														
M.1.1	100	1,5	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		○
M.2.1	80	1,5	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		○
M.3.1	100	1,5	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		○
S.1.1	**40**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.1.2	**40**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.2.1	**35**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.2.2	**35**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.2.3	**35**	**1,5**	**0,04**	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,12	0,08	●		
S.3.1	**100**	**1,5**	**0,05**	0,04	0,06	0,05	0,08	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		
S.3.2	**80**	**1,5**	**0,05**	0,04	0,06	0,05	0,08	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		
S.3.3	**70**	**1,5**	**0,05**	0,04	0,06	0,05	0,08	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		

Plunging angle for ramping and helical milling = 1°

Index	53 030 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
M.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		○
M.2.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		○
M.3.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		○
S.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.1.2	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.2.1	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.2.2	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.2.3	0,08	0,06	0,04	0,10	0,07	0,05	0,12	0,09	0,05	0,14	0,10	0,06	●		
S.3.1	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,16	0,12	0,08	●		
S.3.2	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,16	0,12	0,08	●		
S.3.3	0,09	0,07	0,05	0,11	0,08	0,06	0,13	0,10	0,07	0,16	0,12	0,08	●		

Cutting data standard values – MonsterMill – NCR – End mill, extra long

Index	ZEFP = 4		Type extra long	53 030 ...											
				Ø DC (mm) =											
				4		5		6		8		10		12	
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)											
M.1.1	100	80	1,0	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
M.2.1	90	70	1,0	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
M.3.1	100	80	1,0	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.1.1	**50**	**40**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.1.2	**50**	**40**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.2.1	**35**	**30**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.2.2	**35**	**30**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.2.3	**35**	**30**	**1,0**	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07
S.3.1	**100**	**80**	**1,0**	0,04	0,03	0,05	0,04	0,05	0,04	0,07	0,06	0,09	0,07	0,11	0,08
S.3.2	**80**	**70**	**1,0**	0,04	0,03	0,05	0,04	0,05	0,04	0,07	0,06	0,09	0,07	0,11	0,08
S.3.3	**70**	**60**	**1,0**	0,04	0,03	0,05	0,04	0,05	0,04	0,07	0,06	0,09	0,07	0,11	0,08

Plunging angle for ramping and helical milling: 3°

Cutting data standard values – MonsterMill – NCR – ball-nosed end mill

Index	Type long	Type extra long	$a_{p\,max.}$ x DC	53 032 ... / 53 033 ...											
				Ø DC (mm) =											
				2		3		4		5		6		8	
				a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,05 x DC
	v_c (m/min)			f_z (mm)											
M.1.1	120	90	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
M.2.1	100	80	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
M.3.1	120	90	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
S.1.1	**60**	**50**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.1.2	**60**	**50**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.2.1	**50**	**40**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.2.2	**50**	**40**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.2.3	**50**	**40**	**0.02**	0.015	0.01	0.025	0.015	0.03	0.02	0.04	0.025	0.05	0.03	0.06	0.04
S.3.1	100	80	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
S.3.2	90	70	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05
S.3.3	90	70	0.02	0.02	0.015	0.03	0.02	0.035	0.025	0.04	0.03	0.055	0.04	0.07	0.05

Index	53 030 ... Ø DC (mm) = 16 a_e 0,1–0,2 x DC	16 a_e 0,3–0,4 x DC	20 a_e 0,1–0,2 x DC	20 a_e 0,3–0,4 x DC	Emulsion	Compressed air	MMS
	f_z (mm)				● 1st choice ○ suitable		
M.1.1	0,12	0,09	0,14	0,10	●		○
M.2.1	0,12	0,09	0,14	0,10	●		○
M.3.1	0,12	0,09	0,14	0,10	●		○
S.1.1	0,12	0,09	0,14	0,10	●		
S.1.2	0,12	0,09	0,14	0,10	●		
S.2.1	0,12	0,09	0,14	0,10	●		
S.2.2	0,12	0,09	0,14	0,10	●		
S.2.3	0,12	0,09	0,14	0,10	●		
S.3.1	0,13	0,10	0,16	0,12	●		
S.3.2	0,13	0,10	0,16	0,12	●		
S.3.3	0,13	0,10	0,16	0,12	●		

Index	53 032 ... / 53 033 ... Ø DC (mm) = 10 a_e 0,01–0,02 x DC	10 a_e 0,03–0,05 x DC	12 a_e 0,01–0,02 x DC	12 a_e 0,03–0,05 x DC	16 a_e 0,01–0,02 x DC	16 a_e 0,03–0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)						● 1st choice ○ suitable		
M.1.1	0.08	0.06	0.09	0.07	0.12	0.1	●		○
M.2.1	0.08	0.06	0.09	0.07	0.12	0.1	●		○
M.3.1	0.08	0.06	0.09	0.07	0.12	0.1	●		○
S.1.1	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.1.2	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.2.1	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.2.2	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.2.3	0.07	0.05	0.08	0.06	0.1	0.08	●		
S.3.1	0.08	0.06	0.09	0.07	0.12	0.1	●		
S.3.2	0.08	0.06	0.09	0.07	0.12	0.1	●		
S.3.3	0.08	0.06	0.09	0.07	0.12	0.1	●		

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 2,5 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Peripheral milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
P.2.3	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
P.3.3	200	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
H.1.1	170	1,0	0,006	0,006	0,012	0,012	0,018	0,018	0,024	0,030	0,036	0,042
H.1.2	160	1,0	0,005	0,005	0,010	0,010	0,014	0,014	0,019	0,024	0,029	0,034
H.1.3	150	1,0	0,004	0,004	0,008	0,008	0,012	0,012	0,016	0,020	0,024	0,028
H.1.4	110	1,0	0,003	0,003	0,006	0,006	0,010	0,010	0,013	0,016	0,019	0,022

Index	$T_x \leq 2,5 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Z-layer milling / face milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.2.3	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.3.3	120	0,07	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.1	110	0,05	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.2	100	0,05	0,002	0,002	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017
H.1.3	80	0,03	0,002	0,002	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,014
H.1.4	60	0,03	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011

Index	$T_x \leq 2,5 \times DC$		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Full slot		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.2.3	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.3.3	70	0,07	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.1	55	0,05	0,002	0,002	0,005	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.2	45	0,05	0,001	0,001	0,003	0,003	0,004	0,005	0,006	0,007	0,008	0,010
H.1.3												
H.1.4												

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
P.2.3	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
P.3.3	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
H.1.1	0,054	0,060	0,084	0,126	0,168	0,210	0,240	○	●	●
H.1.2	0,043	0,048	0,067	0,101	0,134	0,168	0,192	○	●	●
H.1.3	0,036	0,040	0,056	0,084	0,112	0,140	0,160	○	●	●
H.1.4	0,029	0,032	0,045	0,067	0,090	0,112	0,128	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.2.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.3.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.1	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.2	0,022	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●
H.1.3	0,018	0,020	0,028	0,042	0,056	0,070	0,080	○	●	●
H.1.4	0,014	0,016	0,022	0,034	0,045	0,056	0,064	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
P.2.3	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
P.3.3	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
H.1.1	0,018	0,023	0,030	0,045	0,050	0,053	0,060	○	●	●
H.1.2	0,012	0,015	0,020	0,030	0,033	0,035	0,040	○	●	●
H.1.3										
H.1.4										

Cutting data standard values – MonsterMill – HCR – End mill

Index	T_x ≤ 2,6–5,0 x DC		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Peripheral milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
P.2.3	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
P.3.3	140	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
H.1.1	119	1,0	0,005	0,005	0,009	0,009	0,014	0,014	0,018	0,023	0,027	0,032
H.1.2	112	1,0	0,004	0,004	0,007	0,007	0,011	0,011	0,014	0,018	0,022	0,025
H.1.3	105	1,0	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.4	77	1,0	0,002	0,002	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017

Index	T_x ≤ 2,6–5,0 x DC		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Z-layer milling / face milling		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,03 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
P.2.3	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
P.3.3	84	0,07	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
H.1.1	77	0,05	0,002	0,002	0,005	0,005	0,007	0,007	0,009	0,011	0,014	0,016
H.1.2	70	0,05	0,002	0,002	0,004	0,004	0,005	0,005	0,007	0,009	0,011	0,013
H.1.3	56	0,03	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.4	60	0,03	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011

Index	T_x ≤ 2,6–5,0 x DC		53 603 ..., 53 604 ...									
			Ø DC (mm) =									
	Full slot		0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 1,0 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.2.3	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.3.3	49	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.1	39	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.2	32	0,05	0,001	0,001	0,002	0,002	0,003	0,003	0,004	0,005	0,006	0,007
H.1.3												
H.1.4												

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
P.2.3	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
P.3.3	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
H.1.1	0,041	0,045	0,063	0,095	0,126	0,158	0,180	○	●	●
H.1.2	0,032	0,036	0,050	0,076	0,101	0,126	0,144	○	●	●
H.1.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.4	0,022	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,03 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
P.2.3	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
P.3.3	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
H.1.1	0,020	0,023	0,032	0,047	0,063	0,079	0,090	○	●	●
H.1.2	0,016	0,018	0,025	0,038	0,050	0,063	0,072	○	●	●
H.1.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.4	0,011	0,012	0,017	0,025	0,034	0,042	0,048	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 1,0 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.2.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.3.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.1	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.2	0,009	0,010	0,014	0,021	0,028	0,035	0,040	○	●	●
H.1.3										
H.1.4										

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 5{,}1–10{,}0 \times DC$		53 603 ..., 53 604 ...									
	Peripheral milling		Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.2.3	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
P.3.3	110	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.1	94	0,75	0,003	0,003	0,006	0,006	0,009	0,009	0,012	0,015	0,018	0,021
H.1.2	88	0,75	0,002	0,002	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017
H.1.3	83	0,75	0,002	0,002	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,014
H.1.4	61	0,75	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011

Index	$T_x \leq 5{,}1–10{,}0 \times DC$		53 603 ..., 53 604 ...									
	Z-layer milling / face milling		Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,3 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.2.3	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
P.3.3	66	0,07	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.1	61	0,05	0,002	0,002	0,003	0,003	0,005	0,005	0,006	0,008	0,009	0,011
H.1.2	55	0,05	0,001	0,001	0,002	0,002	0,004	0,004	0,005	0,006	0,007	0,008
H.1.3	44	0,03	0,001	0,001	0,002	0,002	0,003	0,003	0,004	0,005	0,006	0,007
H.1.4	33	0,03	0,001	0,001	0,002	0,002	0,002	0,002	0,003	0,004	0,005	0,006

● 1st choice
○ suitable

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		53 603 ..., 53 604 ...												
	Peripheral milling		Ø DC (mm) =												
			0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2	2,5	3	4	Emulsion	Compressed air	MMS
			a_e 0,05 x DC													
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)													
P.1.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.2.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.3.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.1	77	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.2	72	0,5	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,013	0,017	0,019	0,027	○	●	●
H.1.3	68	0,5	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011	0,014	0,016	0,022	○	●	●
H.1.4	50	0,5	0,003	0,003	0,004	0,004	0,005	0,006	0,008	0,009	0,012	0,013	0,018	○	●	●

● 1st choice
○ suitable

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		53 603 ..., 53 604 ...												
	Z-layer milling / face milling		Ø DC (mm) =												
			0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2	2,5	3	4	Emulsion	Compressed air	MMS
			a_e 0,3 x DC													
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)													
P.1.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.2.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
P.3.3	90	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.1	77	0,5	0,005	0,005	0,007	0,007	0,010	0,012	0,014	0,017	0,022	0,024	0,034	○	●	●
H.1.2	72	0,5	0,004	0,004	0,006	0,006	0,008	0,010	0,012	0,013	0,017	0,019	0,027	○	●	●
H.1.3	68	0,5	0,003	0,003	0,005	0,005	0,006	0,008	0,010	0,011	0,014	0,016	0,022	○	●	●
H.1.4	50	0,5	0,003	0,003	0,004	0,004	0,005	0,006	0,008	0,009	0,012	0,013	0,018	○	●	●

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.2.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.3.3	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.1	0,027	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.2	0,022	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●
H.1.3	0,018	0,020	0,028	0,042	0,056	0,070	0,080	○	●	●
H.1.4	0,014	0,016	0,022	0,034	0,045	0,056	0,064	○	●	●

Index	53 603 ..., 53 604 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,3 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.2.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
P.3.3	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.1	0,014	0,015	0,021	0,032	0,042	0,053	0,060	○	●	●
H.1.2	0,011	0,012	0,017	0,025	0,034	0,042	0,048	○	●	●
H.1.3	0,009	0,010	0,014	0,021	0,028	0,035	0,040	○	●	●
H.1.4	0,007	0,008	0,011	0,017	0,022	0,028	0,032	○	●	●

Cutting data standard values – MonsterMill – HCR – End mill

Index	$T_x \leq 2 \times DC$		53 605 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Peripheral milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
P.2.3	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
P.3.3	200	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
H.1.1	160	2,0	0,018	0,027	0,038	0,051	0,075	0,093	0,120	0,135	○	●	●
H.1.2	130	2,0	0,014	0,022	0,030	0,041	0,060	0,074	0,096	0,108	○	●	●
H.1.3	120	2,0	0,012	0,018	0,025	0,034	0,050	0,062	0,080	0,090	○	●	●
H.1.4	110	2,0	0,010	0,014	0,020	0,027	0,040	0,050	0,064	0,072	○	●	●

Index	$T_x \leq 2 \times DC$		53 605 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Face milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.2.3	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
P.3.3	120	0,07	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.1	110	0,05	0,015	0,021	0,030	0,042	0,063	0,084	0,105	0,120	○	●	●
H.1.2	90	0,05	0,012	0,017	0,024	0,034	0,050	0,067	0,084	0,096	○	●	●
H.1.3	75	0,03	0,010	0,014	0,020	0,028	0,042	0,056	0,070	0,080	○	●	●
H.1.4	60	0,03	0,008	0,011	0,016	0,022	0,034	0,045	0,056	0,064	○	●	●

Index	$T_x \leq 3 \times DC$		53 606 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Peripheral milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,04 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
P.2.3	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
P.3.3	140	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
H.1.1	119	2,0	0,014	0,024	0,033	0,045	0,066	0,083	0,105	0,120	○	●	●
H.1.2	112	2,0	0,011	0,019	0,026	0,036	0,053	0,066	0,084	0,096	○	●	●
H.1.3	105	2,0	0,009	0,016	0,022	0,030	0,044	0,055	0,070	0,080	○	●	●
H.1.4	77	2,0	0,007	0,013	0,018	0,024	0,035	0,044	0,056	0,064	○	●	●

Index	$T_x \leq 3 \times DC$		53 606 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
	Face milling		1	2	3	4	6	8	10	12	Emulsion	Compressed air	MMS
			a_e 0,04 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.1.3	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
P.2.3	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
P.3.3	105	0,07	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
H.1.1	84	0,05	0,009	0,014	0,023	0,036	0,054	0,072	0,090	0,105	○	●	●
H.1.2	77	0,05	0,007	0,011	0,018	0,029	0,043	0,058	0,072	0,084	○	●	●
H.1.3	63	0,03	0,006	0,009	0,015	0,024	0,036	0,048	0,060	0,070	○	●	●
H.1.4	42	0,03	0,005	0,007	0,012	0,019	0,029	0,038	0,048	0,056	○	●	●

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Cutting data standard values – MonsterMill – HCR – Ball-nosed end mill

Index	$T_x \leq 2,5 \times DC$		53 602 ...						● 1st choice ○ suitable		
			Ø DC (mm) =								
			3	4	6	8	10	12			
			a_e 0,05 x DC								
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
P.2.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
P.3.3	200	0,07	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
H.1.1	180	0,05	0,038	0,050	0,076	0,101	0,126	0,151	○	●	●
H.1.2	160	0,05	0,030	0,040	0,060	0,081	0,101	0,121	○	●	●
H.1.3	150	0,03	0,025	0,034	0,050	0,067	0,084	0,101	○	●	●
H.1.4	130	0,03	0,020	0,027	0,040	0,054	0,067	0,081	○	●	●

Index	$T_x \leq 2,6–5,0 \times DC$		53 602 ...						● 1st choice ○ suitable		
			Ø DC (mm) =								
			3	4	6	8	10	12			
			a_e 0,05 x DC								
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.3	120	0,07	0,03	0,04	0,053	0,073	0,093	0,113	○	●	●
P.2.3	120	0,07	0,03	0,04	0,053	0,073	0,093	0,113	○	●	●
P.3.3	120	0,07	0,03	0,04	0,053	0,073	0,093	0,113	○	●	●
H.1.1	108	0,05	0,030	0,040	0,053	0,073	0,093	0,113	○	●	●
H.1.2	96	0,05	0,024	0,032	0,042	0,058	0,075	0,091	○	●	●
H.1.3	90	0,03	0,020	0,027	0,035	0,049	0,062	0,076	○	●	●
H.1.4	78	0,03	0,016	0,022	0,028	0,039	0,050	0,060	○	●	●

Index	$T_x \leq 5,1–10,0 \times DC$		53 602 ...						● 1st choice ○ suitable		
			Ø DC (mm) =								
			3	4	6	8	10	12			
			a_e 0,04 x DC								
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.3	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
P.2.3	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
P.3.3	90	0,06	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
H.1.1	81	0,04	0,023	0,030	0,030	0,045	0,060	0,076	○	●	●
H.1.2	72	0,04	0,018	0,024	0,024	0,036	0,048	0,060	○	●	●
H.1.3	68	0,02	0,015	0,020	0,020	0,030	0,040	0,050	○	●	●
H.1.4	59	0,02	0,012	0,016	0,016	0,024	0,032	0,040	○	●	●

14

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Cutting data standard values – MonsterMill – HCR – Ball-nosed end mill

Index	$T_x \leq 2,5 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
P.2.3	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
P.3.3	200	0,07	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
H.1.1	180	0,05	0,003	0,006	0,008	0,011	0,015	0,018	0,021	0,027	0,033	0,036
H.1.2	160	0,05	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
H.1.3	150	0,03	0,002	0,004	0,005	0,007	0,010	0,012	0,014	0,018	0,022	0,024
H.1.4	130	0,03	0,002	0,003	0,004	0,006	0,008	0,010	0,011	0,014	0,018	0,019

Index	$T_x \leq 2,6–5,0 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
P.2.3	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
P.3.3	120	0,07	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
H.1.1	108	0,05	0,002	0,005	0,006	0,008	0,012	0,014	0,017	0,022	0,026	0,029
H.1.2	96	0,05	0,002	0,004	0,005	0,007	0,010	0,011	0,014	0,017	0,020	0,023
H.1.3	90	0,03	0,002	0,003	0,004	0,006	0,008	0,010	0,012	0,015	0,017	0,019
H.1.4	78	0,03	0,001	0,002	0,003	0,004	0,006	0,008	0,009	0,012	0,014	0,015

Index	$T_x \leq 5,1–10,0 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
P.2.3	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
P.3.3	90	0,06	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
H.1.1	81	0,04	0,002	0,003	0,005	0,006	0,009	0,011	0,014	0,017	0,018	0,021
H.1.2	72	0,04	0,001	0,002	0,004	0,005	0,007	0,008	0,011	0,013	0,014	0,017
H.1.3	68	0,02	0,001	0,002	0,003	0,004	0,006	0,007	0,009	0,011	0,012	0,014
H.1.4	59	0,02	0,001	0,002	0,002	0,003	0,005	0,006	0,007	0,009	0,010	0,011

Index	$T_x \leq 10,1–15,0 \times DC$		53 600 ..., 53 601 ...									
			Ø DC (mm) =									
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1	1,2–1,4	1,5	1,6–1,8	2
			a_e 0,04 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.1.3	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.2.3	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
P.3.3	70	0,05	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.1	63	0,03	0,002	0,002	0,003	0,005	0,006	0,008	0,009	0,011	0,012	0,015
H.1.2	56	0,03	0,001	0,001	0,002	0,004	0,005	0,006	0,007	0,008	0,010	0,012
H.1.3	53	0,01	0,001	0,001	0,002	0,003	0,004	0,005	0,006	0,007	0,008	0,010
H.1.4	46	0,01	0,001	0,001	0,002	0,002	0,003	0,004	0,005	0,006	0,006	0,008

For improved surface quality, reduce f_z and allowance (a_e or a_p) by 30%!

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
P.2.3	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
P.3.3	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
H.1.1	0,045	0,054	0,072	0,108	0,144	0,180	0,216	○	●	●
H.1.2	0,036	0,043	0,058	0,086	0,115	0,144	0,173	○	●	●
H.1.3	0,030	0,036	0,048	0,072	0,096	0,120	0,144	○	●	●
H.1.4	0,024	0,029	0,038	0,058	0,077	0,096	0,115	○	●	●

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
P.2.3	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
P.3.3	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
H.1.1	0,036	0,044	0,058	0,076	0,104	0,133	0,162	○	●	●
H.1.2	0,029	0,035	0,046	0,060	0,084	0,107	0,130	○	●	●
H.1.3	0,024	0,029	0,039	0,050	0,070	0,089	0,108	○	●	●
H.1.4	0,019	0,023	0,031	0,040	0,056	0,071	0,086	○	●	●

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,05 x DC									
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
P.2.3	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
P.3.3	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
H.1.1	0,027	0,033	0,044	0,043	0,065	0,086	0,108	○	●	●
H.1.2	0,022	0,026	0,035	0,035	0,052	0,069	0,086	○	●	●
H.1.3	0,018	0,022	0,029	0,029	0,043	0,058	0,072	○	●	●
H.1.4	0,014	0,018	0,023	0,023	0,035	0,046	0,058	○	●	●

Index	53 600 ..., 53 601 ...							● 1st choice ○ suitable		
	Ø DC (mm) =									
	2,5	3	4	6	8	10	12			
	a_e 0,04 x DC		a_e 0,05 x DC							
	f_z (mm)							Emulsion	Compressed air	MMS
P.1.3	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
P.2.3	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
P.3.3	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
H.1.1	0,021	0,027	0,035	0,035	0,052	0,069	0,086	○	●	●
H.1.2	0,017	0,022	0,028	0,028	0,041	0,055	0,069	○	●	●
H.1.3	0,014	0,018	0,023	0,023	0,035	0,046	0,058	○	●	●
H.1.4	0,011	0,014	0,019	0,018	0,028	0,037	0,046	○	●	●

Cutting data standard values – MonsterMill – PCR – End mill, UNI version

Index	Short / long / extra long version		52 613 ..., 52 614 ..., 52 615 ..., 52 619 ...																					
			Ø DC (mm) =																					
			5,0			5,7–6,0			6,7–7,0			7,7–8,0			8,7–9,0			9,7–10,0			11,7–12,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																					
P.1.1	240	1,0	0,096	0,068	0,043	0,107	0,075	0,048	0,122	0,086	0,054	0,136	0,096	0,061	0,150	0,106	0,067	0,163	0,115	0,073	0,188	0,133	0,084
P.1.2	230	1,0	0,092	0,065	0,041	0,102	0,072	0,046	0,116	0,082	0,052	0,130	0,092	0,058	0,143	0,101	0,064	0,156	0,110	0,070	0,179	0,127	0,080
P.1.3	220	1,0	0,087	0,062	0,039	0,097	0,069	0,043	0,111	0,078	0,050	0,124	0,088	0,055	0,136	0,096	0,061	0,148	0,105	0,066	0,171	0,121	0,076
P.1.4	205	1,0	0,083	0,059	0,037	0,092	0,065	0,041	0,105	0,074	0,047	0,118	0,083	0,053	0,130	0,092	0,058	0,141	0,100	0,063	0,162	0,115	0,072
P.1.5	195	1,0	0,079	0,056	0,035	0,087	0,062	0,039	0,100	0,070	0,045	0,111	0,079	0,050	0,123	0,087	0,055	0,134	0,094	0,060	0,153	0,109	0,069
P.2.1	220	1,0	0,096	0,068	0,043	0,107	0,075	0,048	0,122	0,086	0,054	0,136	0,096	0,061	0,150	0,106	0,067	0,163	0,115	0,073	0,188	0,133	0,084
P.2.2	200	1,0	0,087	0,062	0,039	0,097	0,069	0,043	0,111	0,078	0,050	0,124	0,088	0,055	0,136	0,096	0,061	0,148	0,105	0,066	0,171	0,121	0,076
P.2.3	180	1,0	0,079	0,056	0,035	0,087	0,062	0,039	0,100	0,070	0,045	0,111	0,079	0,050	0,123	0,087	0,055	0,134	0,094	0,060	0,153	0,109	0,069
P.2.4	140	1,0	0,073	0,051	0,033	0,081	0,057	0,036	0,092	0,065	0,041	0,103	0,073	0,046	0,114	0,080	0,051	0,124	0,087	0,055	0,142	0,100	0,064
P.3.1	130	1,0	0,084	0,060	0,038	0,094	0,066	0,042	0,107	0,076	0,048	0,120	0,085	0,054	0,132	0,093	0,059	0,143	0,101	0,064	0,165	0,117	0,074
P.3.2	120	1,0	0,080	0,057	0,036	0,089	0,063	0,040	0,101	0,072	0,045	0,114	0,080	0,051	0,125	0,088	0,056	0,136	0,096	0,061	0,156	0,111	0,070
P.3.3	110	1,0	0,076	0,053	0,034	0,084	0,059	0,038	0,096	0,068	0,043	0,107	0,076	0,048	0,118	0,084	0,053	0,129	0,091	0,058	0,148	0,104	0,066
P.4.1	90	1,0	0,058	0,041	0,026	0,065	0,046	0,029	0,074	0,052	0,033	0,083	0,058	0,037	0,091	0,064	0,041	0,099	0,070	0,044	0,114	0,080	0,051
P.4.2	90	1,0	0,058	0,041	0,026	0,065	0,046	0,029	0,074	0,052	0,033	0,083	0,058	0,037	0,091	0,064	0,041	0,099	0,070	0,044	0,114	0,080	0,051
M.1.1	60	1,0	0,051	0,036	0,023	0,057	0,040	0,025	0,065	0,046	0,029	0,072	0,051	0,032	0,080	0,056	0,036	0,087	0,061	0,039	0,099	0,070	0,044
M.2.1	55	1,0	0,042	0,030	0,019	0,047	0,033	0,021	0,054	0,038	0,024	0,060	0,042	0,027	0,066	0,047	0,029	0,072	0,051	0,032	0,082	0,058	0,037
M.3.1	60	1,0	0,044	0,031	0,020	0,048	0,034	0,022	0,055	0,039	0,025	0,062	0,044	0,028	0,068	0,048	0,031	0,074	0,052	0,033	0,085	0,060	0,038
K.1.1	240	1,0	0,145	0,103	0,065	0,162	0,114	0,072	0,185	0,130	0,083	0,206	0,146	0,092	0,227	0,161	0,102	0,247	0,175	0,111	0,284	0,201	0,127
K.1.2	180	1,0	0,102	0,072	0,046	0,113	0,080	0,051	0,129	0,091	0,058	0,145	0,102	0,065	0,159	0,113	0,071	0,173	0,122	0,077	0,199	0,141	0,089
K.2.1	220	1,0	0,124	0,087	0,055	0,137	0,097	0,061	0,157	0,111	0,070	0,175	0,124	0,078	0,193	0,137	0,086	0,210	0,149	0,094	0,242	0,171	0,108
K.2.2	180	1,0	0,102	0,072	0,046	0,113	0,080	0,051	0,129	0,091	0,058	0,145	0,102	0,065	0,159	0,113	0,071	0,173	0,122	0,077	0,199	0,141	0,089
K.3.1	160	1,0	0,102	0,072	0,046	0,113	0,080	0,051	0,129	0,091	0,058	0,145	0,102	0,065	0,159	0,113	0,071	0,173	0,122	0,077	0,199	0,141	0,089
K.3.2	150	1,0	0,087	0,062	0,039	0,097	0,069	0,043	0,111	0,078	0,050	0,124	0,088	0,055	0,136	0,096	0,061	0,148	0,105	0,066	0,171	0,121	0,076
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1																							
N.3.2																							
N.3.3																							
N.4.1																							
S.1.1																							
S.1.2																							
S.2.1																							
S.2.2																							
S.2.3																							
S.3.1																							
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Index	52 613 ..., 52 614 ..., 52 615 ..., 52 619 ...														● 1st choice ○ suitable		
	Ø DC (mm) =									Ramping	Helical milling			Drilling			
	13,7–14,0			15,5–16,0			17,5–20,0			1,0 x DC		Hole diameter		1,0 x DC			
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Max. plunging angle	$\alpha_{R\,max.}$*	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	f_z Factor	Emulsion	Compressed air	MMS
	f_z (mm)																
P.1.1	0,209	0,148	0,094	0,229	0,162	0,102	0,262	0,185	0,117	45	0,75 x DC	25°	16°	0,9	○	●	○
P.1.2	0,200	0,141	0,089	0,219	0,155	0,098	0,250	0,177	0,112	45	0,75 x DC	25°	16°	0,9	○	●	○
P.1.3	0,190	0,135	0,085	0,208	0,147	0,093	0,238	0,168	0,107	45	0,75 x DC	25°	16°	0,9	○	●	○
P.1.4	0,181	0,128	0,081	0,198	0,140	0,088	0,226	0,160	0,101	45	0,75 x DC	25°	16°	0,9	○	●	○
P.1.5	0,171	0,121	0,077	0,187	0,133	0,084	0,214	0,152	0,096	45	0,75 x DC	25°	16°	0,9	○	●	○
P.2.1	0,209	0,148	0,094	0,229	0,162	0,102	0,262	0,185	0,117	45	0,75 x DC	25°	16°	0,8	○	●	○
P.2.2	0,190	0,135	0,085	0,208	0,147	0,093	0,238	0,168	0,107	45	0,75 x DC	25°	16°	0,8	○	●	○
P.2.3	0,171	0,121	0,077	0,187	0,133	0,084	0,214	0,152	0,096	45	0,75 x DC	25°	16°	0,8	○	●	○
P.2.4	0,159	0,112	0,071	0,174	0,123	0,078	0,198	0,140	0,089	45	0,75 x DC	25°	16°	0,7	○	●	○
P.3.1	0,184	0,130	0,082	0,201	0,142	0,090	0,230	0,163	0,103	30	0,5 x DC	18°	11°	0,8	●		○
P.3.2	0,175	0,123	0,078	0,191	0,135	0,085	0,218	0,154	0,098	30	0,5 x DC	18°	11°	0,7	●		○
P.3.3	0,165	0,117	0,074	0,181	0,128	0,081	0,206	0,146	0,092	30	0,5 x DC	18°	11°	0,7	●		○
P.4.1	0,127	0,090	0,057	0,139	0,098	0,062	0,159	0,112	0,071	15	0,5 x DC	18°	11°		●		○
P.4.2	0,127	0,090	0,057	0,139	0,098	0,062	0,159	0,112	0,071	15	0,5 x DC	18°	11°		●		○
M.1.1	0,111	0,079	0,050	0,122	0,086	0,054	0,139	0,098	0,062	15	0,5 x DC	18°	11°		●		
M.2.1	0,092	0,065	0,041	0,101	0,071	0,045	0,115	0,081	0,051	15	0,5 x DC	18°	11°		●		
M.3.1	0,095	0,067	0,043	0,104	0,074	0,047	0,119	0,084	0,053	15	0,5 x DC	18°	11°		●		
K.1.1	0,317	0,224	0,142	0,347	0,245	0,155	0,397	0,281	0,178	45	0,75 x DC	25°	16°	0,8		●	
K.1.2	0,222	0,157	0,099	0,243	0,172	0,109	0,278	0,196	0,124	45	0,75 x DC	25°	16°	0,8		●	
K.2.1	0,270	0,191	0,121	0,295	0,209	0,132	0,337	0,239	0,151	45	0,75 x DC	25°	16°	0,8		●	
K.2.2	0,222	0,157	0,099	0,243	0,172	0,109	0,278	0,196	0,124	45	0,75 x DC	25°	16°	0,8		●	
K.3.1	0,222	0,157	0,099	0,243	0,172	0,109	0,278	0,196	0,124	45	0,75 x DC	25°	16°	0,8		●	
K.3.2	0,190	0,135	0,085	0,208	0,147	0,093	0,238	0,168	0,107	45	0,75 x DC	25°	16°	0,8		●	
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1																	
S.3.2																	
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

14

* Width of cut per helical revolution

Cutting data for ramping and helical milling = 100 %
Multiply cutting data for drilling by the factor from the table

Cutting data standard values – MonsterMill – PCR – End mill, UNI version – trochoidal

Index	Type long		52 619																			
			Ø DC (mm) =																			
			5				6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	505	46°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,038	0,19	0,14	0,11	0,043
P.1.2	480	46°	0,09	0,06	0,05	0,020	0,11	0,07	0,06	0,024	0,13	0,10	0,08	0,030	0,16	0,11	0,09	0,036	0,19	0,13	0,11	0,041
P.1.3	460	46°	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,029	0,15	0,11	0,09	0,034	0,18	0,12	0,10	0,039
P.1.4	435	46°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,021	0,12	0,09	0,07	0,027	0,15	0,10	0,08	0,033	0,17	0,12	0,10	0,038
P.1.5	415	46°	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,020	0,12	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,036
P.2.1	460	46°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,038	0,19	0,14	0,11	0,043
P.2.2	415	46°	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,029	0,15	0,11	0,09	0,034	0,18	0,12	0,10	0,039
P.2.3	375	46°	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,020	0,12	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,036
P.2.4	290	46°	0,07	0,05	0,04	0,016	0,08	0,06	0,05	0,019	0,11	0,08	0,06	0,024	0,13	0,09	0,07	0,029	0,15	0,10	0,08	0,033
P.3.1	270	46°	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,022	0,12	0,09	0,07	0,028	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,038
P.3.2	250	46°	0,08	0,06	0,05	0,018	0,09	0,07	0,05	0,021	0,12	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,036
P.3.3	230	46°	0,07	0,05	0,04	0,017	0,09	0,06	0,05	0,019	0,11	0,08	0,06	0,025	0,13	0,09	0,08	0,030	0,15	0,11	0,09	0,034
P.4.1	190	46°	0,06	0,04	0,03	0,013	0,07	0,05	0,04	0,015	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,023	0,12	0,08	0,07	0,026
P.4.2	190	46°	0,06	0,04	0,03	0,013	0,07	0,05	0,04	0,015	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,023	0,12	0,08	0,07	0,026
M.1.1	220	35°	0,05	0,03		0,011	0,06	0,04		0,013	0,08	0,05		0,018	0,10	0,06		0,022	0,12	0,07		0,027
M.2.1	200	35°	0,06	0,04		0,013	0,07	0,05		0,016	0,10	0,06		0,021	0,12	0,08		0,027	0,14	0,10		0,032
M.3.1	200	35°	0,06	0,04		0,013	0,07	0,05		0,016	0,10	0,06		0,021	0,12	0,08		0,027	0,14	0,10		0,032
K.1.1	500	46°	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,037	0,21	0,15	0,12	0,048	0,26	0,18	0,15	0,057	0,29	0,21	0,17	0,066
K.1.2	375	46°	0,10	0,07	0,06	0,022	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,033	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,046
K.2.1	460	46°	0,12	0,09	0,07	0,027	0,14	0,10	0,08	0,032	0,18	0,13	0,10	0,041	0,22	0,15	0,13	0,049	0,25	0,18	0,14	0,056
K.2.2	375	46°	0,10	0,07	0,06	0,022	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,033	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,046
K.3.1	335	46°	0,10	0,07	0,06	0,022	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,033	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,046
K.3.2	315	46°	0,09	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,029	0,15	0,11	0,09	0,034	0,18	0,12	0,10	0,039
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1																						
N.3.2																						
N.3.3																						
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Cutting depth corresponding to the cutting length

milling

Index	52 619 .... Ø DC (mm) = 14				16				18				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1	0,22	0,15	0,13	0,049	0,24	0,17	0,14	0,053	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,061	○	●	○
P.1.2	0,21	0,15	0,12	0,046	0,23	0,16	0,13	0,051	0,24	0,17	0,14	0,054	0,26	0,18	0,15	0,058	○	●	○
P.1.3	0,20	0,14	0,11	0,044	0,22	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,17	0,14	0,055	○	●	○
P.1.4	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,046	0,22	0,16	0,13	0,049	0,23	0,17	0,14	0,052	○	●	○
P.1.5	0,18	0,13	0,10	0,040	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,047	0,22	0,16	0,13	0,050	○	●	○
P.2.1	0,22	0,15	0,13	0,049	0,24	0,17	0,14	0,053	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,061	○	●	○
P.2.2	0,20	0,14	0,11	0,044	0,22	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,17	0,14	0,055	○	●	○
P.2.3	0,18	0,13	0,10	0,040	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,047	0,22	0,16	0,13	0,050	○	●	○
P.2.4	0,16	0,12	0,09	0,037	0,18	0,13	0,10	0,040	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,046	○	●	○
P.3.1	0,19	0,13	0,11	0,043	0,21	0,15	0,12	0,047	0,22	0,16	0,13	0,050	0,24	0,17	0,14	0,053	●		○
P.3.2	0,18	0,13	0,10	0,040	0,20	0,14	0,11	0,044	0,21	0,15	0,12	0,048	0,23	0,16	0,13	0,051	●		○
P.3.3	0,17	0,12	0,10	0,038	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,048	●		○
P.4.1	0,13	0,09	0,08	0,029	0,14	0,10	0,08	0,032	0,15	0,11	0,09	0,035	0,16	0,12	0,09	0,037	●		○
P.4.2	0,13	0,09	0,08	0,029	0,14	0,10	0,08	0,032	0,15	0,11	0,09	0,035	0,16	0,12	0,09	0,037	●		○
M.1.1	0,14	0,08		0,031	0,16	0,10		0,036	0,18	0,11		0,040	0,20	0,12		0,045	●		
M.2.1	0,17	0,11		0,038	0,19	0,13		0,043	0,22	0,14		0,048	0,24	0,16		0,054	●		
M.3.1	0,17	0,11		0,038	0,19	0,13		0,043	0,22	0,14		0,048	0,24	0,16		0,054	●		
K.1.1	0,33	0,23	0,19	0,073	0,36	0,25	0,21	0,080	0,39	0,27	0,22	0,086	0,41	0,29	0,24	0,092		●	
K.1.2	0,23	0,16	0,13	0,051	0,25	0,18	0,15	0,056	0,27	0,19	0,16	0,061	0,29	0,20	0,17	0,064		●	
K.2.1	0,28	0,20	0,16	0,062	0,31	0,22	0,18	0,068	0,33	0,23	0,19	0,074	0,35	0,25	0,20	0,078		●	
K.2.2	0,23	0,16	0,13	0,051	0,25	0,18	0,15	0,056	0,27	0,19	0,16	0,061	0,29	0,20	0,17	0,064		●	
K.3.1	0,23	0,16	0,13	0,051	0,25	0,18	0,15	0,056	0,27	0,19	0,16	0,061	0,29	0,20	0,17	0,064		●	
K.3.2	0,20	0,14	0,11	0,044	0,22	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,17	0,14	0,055		●	
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1																			
N.3.2																			
N.3.3																			
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Cutting data standard values – MonsterMill – PCR – End mill, AL version

Index	Type long / extra long		52 616 ..., 52 617 ..., 52 618 ...																				
			Ø DC (mm) =																				
			5,0			5,7–7,0			7,7–8,0			8,7–10,0			11,7–12,0			13,7–14,0			15,5–16,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																				
P.1.1																							
P.1.2																							
P.1.3																							
P.1.4																							
P.1.5																							
P.2.1																							
P.2.2																							
P.2.3																							
P.2.4																							
P.3.1																							
P.3.2																							
P.3.3																							
P.4.1																							
P.4.2																							
M.1.1																							
M.2.1																							
M.3.1																							
K.1.1																							
K.1.2																							
K.2.1																							
K.2.2																							
K.3.1																							
K.3.2																							
N.1.1	630	1,0	0,111	0,078	0,050	0,149	0,105	0,067	0,167	0,118	0,075	0,200	0,141	0,089	0,229	0,162	0,103	0,256	0,181	0,115	0,280	0,198	0,125
N.1.2	575	1,0	0,101	0,071	0,045	0,135	0,096	0,061	0,151	0,107	0,068	0,181	0,128	0,081	0,208	0,147	0,093	0,233	0,165	0,104	0,255	0,180	0,114
N.2.1	380	1,0	0,106	0,075	0,047	0,142	0,101	0,064	0,159	0,112	0,071	0,190	0,135	0,085	0,219	0,155	0,098	0,244	0,173	0,109	0,267	0,189	0,120
N.2.2	305	1,0	0,111	0,078	0,050	0,149	0,105	0,067	0,167	0,118	0,075	0,200	0,141	0,089	0,229	0,162	0,103	0,256	0,181	0,115	0,280	0,198	0,125
N.2.3	220	1,0	0,121	0,086	0,054	0,162	0,115	0,073	0,182	0,129	0,081	0,218	0,154	0,097	0,250	0,177	0,112	0,279	0,198	0,125	0,306	0,216	0,137
N.3.1	275	1,0	0,050	0,036	0,023	0,068	0,048	0,030	0,076	0,054	0,034	0,091	0,064	0,041	0,104	0,074	0,047	0,116	0,082	0,052	0,127	0,090	0,057
N.3.2	165	1,0	0,081	0,057	0,036	0,108	0,077	0,048	0,121	0,086	0,054	0,145	0,103	0,065	0,167	0,118	0,075	0,186	0,132	0,083	0,204	0,144	0,091
N.3.3	220	1,0	0,081	0,057	0,036	0,108	0,077	0,048	0,121	0,086	0,054	0,145	0,103	0,065	0,167	0,118	0,075	0,186	0,132	0,083	0,204	0,144	0,091
N.4.1																							
S.1.1																							
S.1.2																							
S.2.1																							
S.2.2																							
S.2.3																							
S.3.1																							
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Index	52 616 ..., 52 617 ..., 52 618 ...											● 1st choice ○ suitable		
	Ø DC (mm) =						Ramping	Helical milling			Drilling			
	17,5–18,0			19,5–20,0			1,0 x DC		Hole diameter		1,0 x DC			
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Max. plunging angle	$\alpha_{R\,max.}$*	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	f_z Factor	Emulsion	Compressed air	MMS
	f_z (mm)													
P.1.1														
P.1.2														
P.1.3														
P.1.4														
P.1.5														
P.2.1														
P.2.2														
P.2.3														
P.2.4														
P.3.1														
P.3.2														
P.3.3														
P.4.1														
P.4.2														
M.1.1														
M.2.1														
M.3.1														
K.1.1														
K.1.2														
K.2.1														
K.2.2														
K.3.1														
K.3.2														
N.1.1	0,301	0,213	0,135	0,320	0,226	0,143	45°	0,75 x DC	25°	16°	0,8	●		
N.1.2	0,274	0,194	0,123	0,291	0,206	0,130	45°	0,75 x DC	25°	16°	0,8	●		
N.2.1	0,288	0,203	0,129	0,306	0,216	0,137	45°	0,75 x DC	25°	16°	0,8	●		
N.2.2	0,301	0,213	0,135	0,320	0,226	0,143	45°	0,75 x DC	25°	16°	0,8	●		
N.2.3	0,329	0,233	0,147	0,349	0,247	0,156	45°	0,75 x DC	25°	16°	0,8	●		
N.3.1	0,137	0,097	0,061	0,146	0,103	0,065	45°	0,75 x DC	25°	16°	0,8	●		
N.3.2	0,219	0,155	0,098	0,233	0,165	0,104	45°	0,75 x DC	25°	16°	0,8	●		
N.3.3	0,219	0,155	0,098	0,233	0,165	0,104	45°	0,75 x DC	25°	16°	0,8	●		
N.4.1														
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1														
S.3.2														
S.3.3														
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

14

* Width of cut per helical revolution

Cutting data for ramping and helical milling = 100 %
Multiply cutting data for drilling by the factor from the table

Cutting data standard values – MonsterMill – PCR – End mill, AL version – trochoidal

Index	Type long		52 618 ...																			
			Ø DC (mm) =																			
			5				6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1																						
P.1.2																						
P.1.3																						
P.1.4																						
P.1.5																						
P.2.1																						
P.2.2																						
P.2.3																						
P.2.4																						
P.3.1																						
P.3.2																						
P.3.3																						
P.4.1																						
P.4.2																						
M.1.1																						
M.2.1																						
M.3.1																						
K.1.1																						
K.1.2																						
K.2.1																						
K.2.2																						
K.3.1																						
K.3.2																						
N.1.1	800	66°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,024	0,14	0,10	0,08	0,031	0,17	0,12	0,10	0,037	0,19	0,13	0,11	0,043
N.1.2	725	66°	0,08	0,06	0,05	0,019	0,10	0,07	0,06	0,022	0,13	0,09	0,07	0,028	0,15	0,11	0,09	0,034	0,17	0,12	0,10	0,039
N.2.1	485	66°	0,09	0,06	0,05	0,020	0,10	0,07	0,06	0,023	0,13	0,09	0,08	0,030	0,16	0,11	0,09	0,035	0,18	0,13	0,11	0,041
N.2.2	385	66°	0,09	0,07	0,05	0,021	0,11	0,08	0,06	0,024	0,14	0,10	0,08	0,031	0,17	0,12	0,10	0,037	0,19	0,13	0,11	0,043
N.2.3	280	66°	0,10	0,07	0,06	0,023	0,12	0,08	0,07	0,026	0,15	0,11	0,09	0,034	0,18	0,13	0,10	0,040	0,21	0,15	0,12	0,047
N.3.1	350	66°	0,04	0,03	0,02	0,009	0,05	0,03	0,03	0,011	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,019
N.3.2	210	66°	0,07	0,05	0,04	0,015	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,027	0,14	0,10	0,08	0,031
N.3.3	280	66°	0,07	0,05	0,04	0,015	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,027	0,14	0,10	0,08	0,031
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Cutting depth corresponding to the cutting length

milling

Index	52 618 ... Ø DC (mm) = 14 a_e 0,1 x DC f_z (mm)	14 a_e 0,2 x DC f_z (mm)	14 a_e 0,3 x DC f_z (mm)	14 h_m	16 a_e 0,1 x DC f_z (mm)	16 a_e 0,2 x DC f_z (mm)	16 a_e 0,3 x DC f_z (mm)	16 h_m	18 a_e 0,1 x DC f_z (mm)	18 a_e 0,2 x DC f_z (mm)	18 a_e 0,3 x DC f_z (mm)	18 h_m	20 a_e 0,1 x DC f_z (mm)	20 a_e 0,2 x DC f_z (mm)	20 a_e 0,3 x DC f_z (mm)	20 h_m	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1																			
P.1.2																			
P.1.3																			
P.1.4																			
P.1.5																			
P.2.1																			
P.2.2																			
P.2.3																			
P.2.4																			
P.3.1																			
P.3.2																			
P.3.3																			
P.4.1																			
P.4.2																			
M.1.1																			
M.2.1																			
M.3.1																			
K.1.1																			
K.1.2																			
K.2.1																			
K.2.2																			
K.3.1																			
K.3.2																			
N.1.1	0,21	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,056	0,27	0,19	0,15	0,060	●		
N.1.2	0,19	0,14	0,11	0,043	0,21	0,15	0,12	0,047	0,23	0,16	0,13	0,051	0,24	0,17	0,14	0,054	●		
N.2.1	0,20	0,14	0,12	0,045	0,22	0,16	0,13	0,050	0,24	0,17	0,14	0,054	0,25	0,18	0,15	0,057	●		
N.2.2	0,21	0,15	0,12	0,048	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,056	0,27	0,19	0,15	0,060	●		
N.2.3	0,23	0,16	0,13	0,052	0,25	0,18	0,15	0,057	0,27	0,19	0,16	0,061	0,29	0,21	0,17	0,065	●		
N.3.1	0,10	0,07	0,06	0,022	0,11	0,07	0,06	0,024	0,11	0,08	0,07	0,025	0,12	0,09	0,07	0,027	●		
N.3.2	0,15	0,11	0,09	0,035	0,17	0,12	0,10	0,038	0,18	0,13	0,11	0,041	0,19	0,14	0,11	0,043	●		
N.3.3	0,15	0,11	0,09	0,035	0,17	0,12	0,10	0,038	0,18	0,13	0,11	0,041	0,19	0,14	0,11	0,043	●		
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Cutting data standard values – MonsterMill – MCR – End mill, short – long

Index	Type short		50 752 ...						Type short	Type long	50 752 ...											
			Ø DC (mm) =								Ø DC (mm) =											
			1			2					3			4			5			6		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	$a_{p\,max.}$ x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)								f_z (mm)											
P.1.1	160	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.1.2	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.1.3	120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.1.4	120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.1.5	100	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.2.1	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.2.2	120	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.2.3	100	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.2.4	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.3.1	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.3.2	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.3.3	80	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
P.4.1	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027
P.4.2	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027
M.1.1	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027
M.2.1																						
M.3.1	60	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,030	0,022	0,014	0,038	0,028	0,018	0,049	0,036	0,023	0,058	0,043	0,027
K.1.1	160	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042
K.1.2	160	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042
K.2.1	140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042
K.2.2	140	0,5	0,012	0,010	0,006	0,023	0,019	0,012	1,0	1,0*	0,045	0,033	0,021	0,060	0,044	0,028	0,075	0,055	0,035	0,090	0,066	0,042
K.3.1	100	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030	0,077	0,057	0,036
K.3.2	100	0,5	0,010	0,008	0,005	0,019	0,016	0,010	1,0	1,0*	0,038	0,028	0,018	0,051	0,038	0,024	0,064	0,047	0,030	0,077	0,057	0,036
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
N.3.2	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
N.3.3	140	0,5	0,008	0,007	0,004	0,015	0,013	0,008	1,0	1,0*	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1	60	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020	0,051	0,038	0,024
S.3.2	60	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020	0,051	0,038	0,024
S.3.3	60	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,026	0,019	0,012	0,034	0,025	0,016	0,043	0,032	0,020	0,051	0,038	0,024
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1	80	0,25	0,008	0,007	0,004	0,015	0,013	0,008	0,5	0,5	0,032	0,024	0,015	0,043	0,032	0,020	0,053	0,040	0,025	0,064	0,047	0,030
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

* = with an a_p of 1.5 x d_1 the f_z should be multiplied by 0.8

Plunging angle for ramping and helical milling: Diameter 3–5 = 3° / Diameter 6–9 = 5° / Diameter 10–20 = 8°

Index	50 752 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	8			10			12			14			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.4	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.1.5	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.2.4	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.3.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.3.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.3.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
P.4.1	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
P.4.2	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
M.1.1	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
M.2.1																					
M.3.1	0,08	0,06	0,04	0,10	0,07	0,05	0,10	0,08	0,05	0,11	0,09	0,06	0,12	0,10	0,07	0,14	0,12	0,09	●		
K.1.1	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.1.2	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.2.1	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.2.2	0,12	0,09	0,06	0,15	0,11	0,07	0,16	0,13	0,08	0,18	0,14	0,10	0,19	0,16	0,11	0,22	0,18	0,14		●	
K.3.1	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
K.3.2	0,10	0,08	0,05	0,13	0,10	0,06	0,14	0,11	0,07	0,15	0,12	0,08	0,16	0,14	0,10	0,19	0,16	0,12		●	
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
N.3.2	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
N.3.3	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10	●		
N.4.1																					
S.1.1																					
S.1.2																					
S.2.1																					
S.2.2																					
S.2.3																					
S.3.1	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
S.3.2	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
S.3.3	0,07	0,05	0,03	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,13	0,10	0,08	●		
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1	0,09	0,06	0,04	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,16	0,13	0,10		●	
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – MonsterMill – MCR – End mill, extra long

Index	Type extra long			50 752 ...															
				Ø DC (mm) =															
				3			4			5			6			8			
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC		f_z (mm)															
P.1.1	120	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.1.2	100	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.1.3	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.1.4	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.1.5	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.2.1	100	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.2.2	80	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.2.3	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.2.4	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.3.1	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.3.2	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.3.3	70	1,0*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
P.4.1	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
P.4.2	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
M.1.1	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
M.2.1																		
M.3.1	50	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
K.1.1	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
K.1.2	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
K.2.1	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
K.2.2	120	1,0*	0,5	0,034	0,024	0,015	0,045	0,032	0,020	0,056	0,040	0,025	0,067	0,047	0,030	0,09	0,06	0,04
K.3.1	100	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
K.3.2	100	1,0*	0,5	0,027	0,019	0,012	0,036	0,025	0,016	0,045	0,032	0,020	0,054	0,038	0,024	0,07	0,05	0,03
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	120	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
N.3.2	120	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
N.3.3	120	1,0*	0,5	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1	60	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
S.3.2	60	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
S.3.3	60	0,5*	0,25	0,020	0,014	0,009	0,027	0,019	0,012	0,034	0,024	0,015	0,040	0,028	0,018	0,05	0,04	0,02
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1	80	0,5*	0,5	0,025	0,017	0,011	0,031	0,022	0,014	0,040	0,028	0,018	0,047	0,033	0,021	0,06	0,04	0,03
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

* = Trimming and trochoidal slot milling

Plunging angle for ramping and helical milling:
Diameter 3–5 = 3° / Diameter 6–9 = 5° / Diameter 10–20 = 8°

Index	50 752 ... Ø DC (mm) = 10			12			14			16			20			● 1st choice ○ suitable		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.1.2	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.1.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.1.4	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.1.5	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.2.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.2.2	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.2.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.2.4	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.3.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.3.2	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.3.3	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
P.4.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
P.4.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
M.1.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
M.2.1																		
M.3.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
K.1.1	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
K.1.2	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
K.2.1	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
K.2.2	0,11	0,08	0,05	0,12	0,09	0,06	0,13	0,10	0,07	0,14	0,11	0,08	0,17	0,14	0,10		●	
K.3.1	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
K.3.2	0,09	0,06	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,11	0,09	0,06	0,14	0,11	0,08		●	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
N.3.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
N.3.3	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
S.3.2	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
S.3.3	0,07	0,05	0,03	0,07	0,06	0,04	0,08	0,06	0,04	0,08	0,07	0,05	0,10	0,08	0,06	●		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1	0,08	0,06	0,04	0,08	0,07	0,04	0,09	0,07	0,05	0,10	0,08	0,06	0,12	0,09	0,07		●	
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data – CircularLine – End Mills – CCR-UNI, short – long

Index	Type short / long		53 585..., 53 587..., 53 586 ..., 53 642 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.1.2	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.3	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.5	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.2	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.3	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.1	220	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.2	220	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.3	200	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.4.1	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	160	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.1.2	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.2	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.1	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.2	200	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3																		
S.3.1	140	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	100	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 585..., 53 587..., 53 586 ..., 53 642 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	14				16				18				20						
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
P.1.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.1.3	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.1.4	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.1.5	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.2.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
P.2.2	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
P.2.3	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.2.4	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.3.1	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.3.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.3.3	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
P.4.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
P.4.2	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.1.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.2.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.3.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
K.1.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
K.1.2	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
K.2.1	0,26	0,18	0,15	0,057	0,27	0,19	0,16	0,060	0,28	0,20	0,16	0,063	0,30	0,21	0,17	0,066	○	●	○
K.2.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
K.3.1	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
K.3.2	0,23	0,16	0,13	0,052	0,25	0,18	0,14	0,055	0,26	0,18	0,15	0,058	0,28	0,20	0,16	0,062	○	●	○
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1																			
N.3.2																			
N.3.3																			
N.4.1																			
S.1.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.3																			
S.3.1	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.2	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

14

Cutting data standard values – CircularLine – End mill – CCR-UNI, extra long

Index	Type extra long			53 589 … / 53 593 …															
				Ø DC (mm) =															
	4xDC	5xDC	max. angle of engagement	6			8			10			12			14			
				a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m
	v_c (m/min)			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)		
P.1.1	250	220	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
P.1.2	250	220	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.1.3	250	220	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.1.4	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.1.5	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.2.1	250	220	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
P.2.2	250	220	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
P.2.3	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.2.4	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.3.1	200	180	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.3.2	200	180	45°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.3.3	180	160	45°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
P.4.1	150	130	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020
P.4.2	130	110	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020
M.1.1	110	90	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020
M.2.1	110	90	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020
M.3.1	110	90	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020
K.1.1	260	230	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
K.1.2	260	230	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
K.2.1	260	230	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
K.2.2	230	210	50°	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025	0,13	0,09	0,028
K.3.1	230	210	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
K.3.2	180	170	50°	0,06	0,04	0,013	0,07	0,05	0,016	0,08	0,06	0,019	0,10	0,07	0,022	0,11	0,08	0,025
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	70	60	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016
S.1.2	70	60	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016
S.2.1	50	40	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016
S.2.2	50	40	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016
S.2.3																		
S.3.1	120	100	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016
S.3.2	90	80	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 589 ... / 53 593 ...									● 1st choice ○ suitable		
	Ø DC (mm) =											
	16			18			20					
	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)			f_z (mm)			f_z (mm)					
P.1.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
P.1.2	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.1.3	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.1.4	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.1.5	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.2.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
P.2.2	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
P.2.3	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.2.4	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.3.1	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.3.2	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.3.3	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
P.4.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
P.4.2	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.1.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.2.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.3.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
K.1.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.1.2	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.2.1	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.2.2	0,13	0,10	0,030	0,14	0,10	0,032	0,15	0,11	0,033	○	●	○
K.3.1	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
K.3.2	0,12	0,09	0,027	0,13	0,09	0,028	0,13	0,10	0,030	○	●	○
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.1.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.3												
S.3.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

14

Cutting data standard values – CircularLine – CCR-VA, long 3xDC

Index	Type long		53 643 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_s 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_s 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_s 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_s 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1																		
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1																		
P.2.2																		
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	200	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	**160**	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	**160**	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	**160**	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	**85**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	**85**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	**65**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	**65**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3	**65**	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.3.1	**160**	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	**120**	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 643 ... Ø DC (mm) = 14				16				18				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1																			
P.1.2																			
P.1.3																			
P.1.4																			
P.1.5																			
P.2.1																			
P.2.2																			
P.2.3																			
P.2.4																			
P.3.1																			
P.3.2																			
P.3.3																			
P.4.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
P.4.2	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.1.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.2.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
M.3.1	0,18	0,13	0,10	0,040	0,19	0,13	0,11	0,042	0,20	0,14	0,12	0,045	0,21	0,15	0,12	0,047	●		
K.1.1																			
K.1.2																			
K.2.1																			
K.2.2																			
K.3.1																			
K.3.2																			
N.1.1																			
N.1.2																			
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1																			
N.3.2																			
N.3.3																			
N.4.1																			
S.1.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.2.3	0,11	0,08	0,06	0,024	0,11	0,08	0,07	0,026	0,12	0,09	0,07	0,027	0,13	0,09	0,08	0,029	●		
S.3.1	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.2	0,15	0,10	0,08	0,033	0,16	0,11	0,09	0,035	0,17	0,12	0,10	0,037	0,18	0,12	0,10	0,040	●		
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

14

Cutting data standard values – CircularLine – CCR-VA, extra-long 4xDC

Index	Type extra long		53 644 ...															
			Ø DC (mm) =															
			6			8			10			12			14			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	
			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)			
P.1.1																		
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1																		
P.2.2																		
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	170	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
P.4.2	150	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
M.1.1	125	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
M.2.1	125	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
M.3.1	125	45°	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,05	0,014	0,08	0,05	0,017	0,09	0,06	0,020	
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	75	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.1.2	75	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.2.1	55	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.2.2	55	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.2.3	55	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.3.1	140	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.3.2	105	40°	0,03	0,02	0,007	0,04	0,03	0,009	0,05	0,04	0,011	0,06	0,04	0,014	0,07	0,05	0,016	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Depth of cut corresponds to the flute length

Index	53 644 ...									● 1st choice ○ suitable		
	Ø DC (mm) =											
	16			18			20					
	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)			f_z (mm)			f_z (mm)					
P.1.1												
P.1.2												
P.1.3												
P.1.4												
P.1.5												
P.2.1												
P.2.2												
P.2.3												
P.2.4												
P.3.1												
P.3.2												
P.3.3												
P.4.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
P.4.2	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.1.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.2.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
M.3.1	0,10	0,07	0,022	0,10	0,07	0,023	0,11	0,08	0,024	●		
K.1.1												
K.1.2												
K.2.1												
K.2.2												
K.3.1												
K.3.2												
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.1.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.2.3	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.1	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.2	0,07	0,05	0,017	0,08	0,06	0,018	0,08	0,06	0,019	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

14

Cutting data standard values – CircularLine – CCR-AL

Index	Type long	Type extra long		max. angle of engagement	53 590 ..., 53 591 ..., 53 594 ..., 53 595 ..., 53 641 ...															
					Ø DC (mm) =															
					6				8				10				12			
	3xDC	4xDC	5xDC		a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m
	v_c (m/min)				f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1																				
P.1.2																				
P.1.3																				
P.1.4																				
P.1.5																				
P.2.1																				
P.2.2																				
P.2.3																				
P.2.4																				
P.3.1																				
P.3.2																				
P.3.3																				
P.4.1																				
P.4.2																				
M.1.1																				
M.2.1																				
M.3.1																				
K.1.1																				
K.1.2																				
K.2.1																				
K.2.2																				
K.3.1																				
K.3.2																				
N.1.1	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.1.2	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.2.1	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.2.2	500	400	300	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.2.3	400	350	265	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.3.1	400	350	265	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.3.2	400	350	265	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.3.3	300	250	190	60°	0,30	0,21	0,18	0,096	0,35	0,25	0,20	0,111	0,40	0,28	0,23	0,126	0,45	0,31	0,26	0,141
N.4.1																				
S.1.1																				
S.1.2																				
S.2.1																				
S.2.2																				
S.2.3																				
S.3.1																				
S.3.2																				
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

Depth of cut corresponds to the flute length

Plunging angle for ramping and helical milling: 4°

Index	53 590 ..., 53 591 ..., 53 594 ..., 53 595 ..., 53 641 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	14				16				18				20						
	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	a_e 0,1 x DC	a_e 0,2 x DC	a_e 0,3 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1																			
P.1.2																			
P.1.3																			
P.1.4																			
P.1.5																			
P.2.1																			
P.2.2																			
P.2.3																			
P.2.4																			
P.3.1																			
P.3.2																			
P.3.3																			
P.4.1																			
P.4.2																			
M.1.1																			
M.2.1																			
M.3.1																			
K.1.1																			
K.1.2																			
K.2.1																			
K.2.2																			
K.3.1																			
K.3.2																			
N.1.1	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.1.2	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.2.1	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.2.2	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.2.3	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.3.1	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.3.2	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.3.3	0,49	0,35	0,29	0,156	0,52	0,37	0,30	0,164	0,54	0,38	0,31	0,171	0,57	0,40	0,33	0,179	●		○
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Cutting data standard values – CircularLine – CCR Ti, long

Index	Type long		52 510 ...											
			Ø DC (mm) =											
			6				8				10			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)			
P.4.1	200	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
P.4.2	180	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
M.1.1	200	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
M.2.1	160	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
M.3.1	180	35°	0,080	0,057	0,046	0,022	0,098	0,070	0,057	0,033	0,125	0,089	0,072	0,042
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	**140**	25°	0,060	0,042	0,034	0,020	0,070	0,049	0,040	0,030	0,089	0,063	0,052	0,040
S.3.2	**120**	25°	0,060	0,042	0,034	0,020	0,070	0,049	0,040	0,030	0,089	0,063	0,052	0,040
S.3.3	**100**	25°	0,045	0,032	0,026	0,018	0,052	0,037	0,030	0,028	0,067	0,047	0,039	0,038

Cutting data standard values – CircularLine – CCR-Ti, extra-long

Index	Type extra long		52 510 ...											
			Ø DC (mm) =											
			6			8			10			12		
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m
			f_z (mm)			f_z (mm)			f_z (mm)			f_z (mm)		
P.4.1	170	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
P.4.2	150	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
M.1.1	170	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
M.2.1	130	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
M.3.1	150	35°	0,057	0,046	0,018	0,070	0,057	0,026	0,089	0,072	0,036	0,114	0,093	0,046
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	**120**	25°	0,031	0,022	0,015	0,036	0,025	0,020	0,045	0,032	0,030	0,054	0,038	0,040
S.3.2	**100**	25°	0,031	0,022	0,015	0,036	0,025	0,020	0,045	0,032	0,030	0,054	0,038	0,040
S.3.3	**90**	25°	0,022	0,016	0,013	0,027	0,019	0,015	0,036	0,025	0,025	0,045	0,032	0,035

Depth of cut corresponds to the flute length

Index	52 510 ... Ø DC (mm) = 12				16				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)				f_z (mm)						
P.4.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
P.4.2	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
M.1.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
M.2.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
M.3.1	0,161	0,114	0,093	0,053	0,188	0,133	0,108	0,064	0,268	0,190	0,155	0,079	●	○	
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,113	0,080	0,065	0,050	0,157	0,111	0,090	0,060	0,217	0,153	0,125	0,075	●		
S.3.2	0,113	0,080	0,065	0,050	0,157	0,111	0,090	0,060	0,217	0,153	0,125	0,075	●		
S.3.3	0,085	0,060	0,049	0,048	0,117	0,083	0,068	0,058	0,163	0,115	0,094	0,070	●		

Index	52 510 ... Ø DC (mm) = 16			20			● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,05 x DC	a_e 0,10 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)			f_z (mm)					
P.4.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
P.4.2	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
M.1.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
M.2.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
M.3.1	0,133	0,108	0,056	0,190	0,155	0,066	●	○	
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1	0,076	0,054	0,050	0,107	0,076	0,060	●		
S.3.2	0,076	0,054	0,050	0,107	0,076	0,060	●		
S.3.3	0,058	0,041	0,045	0,080	0,057	0,055	●		

14

Cutting data standard values – CircularLine – End mill – CCR-H

Index	Type long		53 596 ...												● 1st choice ○ suitable		
			Ø DC (mm) = 6				8				10						
	v_c (m/min)	max. angle of engagement	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	Emulsion	Compressed air	MMS
			f_z (mm)				f_z (mm)				f_z (mm)						
H.1.1	130	30°	0,11	0,07	0,05	0,015	0,13	0,08	0,06	0,019	0,16	0,10	0,07	0,023		●	○
H.1.2	120	30°	0,06	0,04	0,03	0,008	0,07	0,05	0,03	0,010	0,09	0,06	0,04	0,012		●	○
H.1.3	115	30°	0,04	0,03		0,006	0,05	0,03		0,007	0,06	0,04		0,009		●	○
H.1.4	110	30°	0,02			0,003	0,03				0,04			0,006		●	○
H.2.1	130	30°	0,11	0,07	0,05	0,015	0,13	0,08	0,06	0,019	0,16	0,10	0,07	0,023		●	○
H.3.1	130	30°	0,11	0,07	0,05	0,015	0,13	0,08	0,06	0,019	0,16	0,10	0,07	0,023			

Index	Type long		53 596 ...												● 1st choice ○ suitable		
			Ø DC (mm) = 12				16				20						
	v_c (m/min)	max. angle of engagement	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	a_e 0,02 x DC	a_e 0,05 x DC	a_e 0,10 x DC	h_m	Emulsion	Compressed air	MMS
			f_z (mm)				f_z (mm)				f_z (mm)						
H.1.1	130	30°	0,19	0,12	0,08	0,027	0,22	0,14	0,10	0,031	0,24	0,15	0,11	0,034		●	○
H.1.2	120	30°	0,10	0,07	0,05	0,015	0,13	0,08		0,018	0,14	0,09		0,020		●	○
H.1.3	115	30°	0,07	0,05		0,010	0,09	0,06		0,012	0,09	0,06		0,013		●	○
H.1.4	110	30°	0,05			0,006	0,06			0,008	0,08			0,011		●	○
H.2.1	130	30°	0,19	0,12	0,08	0,027	0,22	0,14		0,031	0,24	0,15		0,034		●	○
H.3.1	130	30°	0,19	0,12	0,08	0,027	0,22	0,14	0,10	0,031	0,24	0,15	0,11	0,034		●	○

Depth of cut corresponds to the flute length

Cutting data standard values – SilverLine – NC deburring cutter

Index	50 560 ..., 50 561 ..., 50 562 ..., 50 563 ...							50 564 ..., 50 565 ..., 50 566 ..., 50 567 ...							● 1st choice ○ suitable		
		DPB72S						uncoated									
		Ø DC (mm) =						Ø DC (mm) =									
		4	6	8	10	12	16	4	6	8	10	12	16		Emulsion	Compressed air	MMS
	v_c (m/min)	f_z (mm)						v_c (m/min)	f_z (mm)								
P.1.1	130	0,03	0,035	0,045	0,06	0,08	0,09	70	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.2	130	0,03	0,035	0,045	0,06	0,08	0,09	70	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.3	120	0,03	0,035	0,045	0,06	0,08	0,09	65	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.4	120	0,03	0,035	0,045	0,06	0,08	0,09	65	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.1.5	90	0,025	0,03	0,04	0,055	0,075	0,085	50	0,015	0,02	0,03	0,045	0,065	0,075	●	○	○
P.2.1	130	0,03	0,035	0,045	0,06	0,08	0,09	70	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.2.2	100	0,03	0,035	0,045	0,06	0,08	0,09	60	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
P.2.3	90	0,025	0,03	0,04	0,055	0,075	0,085	50	0,015	0,02	0,03	0,045	0,065	0,075	●	○	○
P.2.4	80	0,02	0,02	0,025	0,03	0,04	0,05	45	0,01	0,015	0,015	0,02	0,03	0,04	●	○	○
P.3.1	120	0,03	0,035	0,04	0,055	0,075	0,085	65	0,02	0,025	0,03	0,045	0,065	0,075	●	○	○
P.3.2	70	0,02	0,02	0,025	0,03	0,04	0,05	40	0,01	0,015	0,015	0,02	0,03	0,04	●	○	○
P.3.3	70	0,02	0,02	0,025	0,03	0,04	0,05	40	0,01	0,015	0,015	0,02	0,03	0,04	●	○	○
P.4.1	100	0,03	0,035	0,04	0,055	0,075	0,085	60	0,02	0,025	0,03	0,045	0,065	0,075	●		
P.4.2	95	0,025	0,03	0,04	0,055	0,075	0,085	55	0,015	0,02	0,03	0,045	0,065	0,075	●		
M.1.1	100	0,025	0,03	0,04	0,055	0,075	0,085	65	0,025	0,03	0,04	0,055	0,075	0,085	●		
M.2.1	80	0,02	0,02	0,025	0,03	0,04	0,05	50	0,02	0,02	0,025	0,03	0,04	0,05	●		
M.3.1	100	0,025	0,03	0,04	0,055	0,075	0,085	65	0,025	0,03	0,04	0,055	0,075	0,085	●		
K.1.1	130	0,03	0,035	0,045	0,06	0,08	0,09	85	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.1.2	100	0,03	0,035	0,045	0,06	0,08	0,09	65	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.2.1	130	0,03	0,035	0,045	0,06	0,08	0,09	85	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.2.2	120	0,03	0,035	0,045	0,06	0,08	0,09	80	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.3.1	130	0,03	0,035	0,045	0,06	0,08	0,09	85	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
K.3.2	120	0,03	0,035	0,045	0,06	0,08	0,09	80	0,02	0,025	0,035	0,05	0,07	0,08	●	○	○
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1	80	0,02	0,02	0,025	0,03	0,04	0,05	50	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.1.2	45	0,012	0,012	0,018	0,02	0,03	0,04	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.2.1	50	0,015	0,015	0,02	0,025	0,035	0,045	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.2.2	40	0,012	0,012	0,018	0,02	0,03	0,04	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.2.3	45	0,012	0,012	0,018	0,02	0,03	0,04	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.3.1	60	0,02	0,02	0,025	0,03	0,04	0,05	45	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.3.2	65	0,02	0,02	0,025	0,03	0,04	0,05	45	0,01	0,015	0,025	0,03	0,035	0,04	●		
S.3.3	50	0,015	0,015	0,02	0,025	0,035	0,045	30	0,01	0,015	0,025	0,03	0,035	0,04	●		
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

14

Cutting data standard values – SilverLine – End mill

Index	Type short / long		50 993 …, 50 994 …, 50 995 …, 50 996 …, 50 997 …, 50 998 …																		● 1st choice ○ suitable		
			Ø DC (mm) =																				
			6			8			10			12			16			20					
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	Emulsion	Compressed air	MMS
			f_z (mm)																				
P.1.1	205	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.2	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.3	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.4	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.5	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.1	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.2	190	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.3	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.4	170	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.1	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.2	170	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.3	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.4.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	200	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.1.2	180	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.2.1	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.2	170	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.1	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.2	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1	315	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.2	315	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.3	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.4.1																							
S.1.1	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	80	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

Plunging angle for ramping and helical milling = 2-3°

Cutting data standard values – SilverLine – End mill

Index	Type long		50 949 ..., 50 999 ...																			● 1st choice ○ suitable		
			Ø DC (mm) =																					
			6			8			10			12			16			20			Emulsion	Compressed air	MMS
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6 x DC			
			f_z (mm)																					
P.1.1	165	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.2	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.3	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.4	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.5	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.1	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.2	150	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.3	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.4	135	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.1	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.2	135	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.3	115	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.4.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	65	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	160	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.1.2	145	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.2.1	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.2	135	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.1	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.2	130	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.2	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.3	200	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.4.1																							
S.1.1	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	65	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

14

Plunging angle for ramping and helical milling = 2-3°

Cutting data standard values – SilverLine – End mills – Trochoidal machining

Index	Type long		50 949 ..., 50 999 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.1.2	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.3	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.5	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.2	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.3	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.1	220	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.2	220	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.3	200	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.4.1	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	160	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.1.2	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.2	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.1	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.2	200	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3																		
S.3.1	140	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	100	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling = 2-3°

Cutting depth corresponding to the cutting length

Index	50 949 ..., 50 999 ...								● 1st choice ○ suitable		
	Ø DC (mm) =										
	16				20						
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)						
P.1.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.1.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.4	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.5	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.2.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.2.2	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.2.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.2.4	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.1	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.4.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
P.4.2	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.1.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.2.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.3.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
K.1.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.1.2	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.2.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.2.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
K.3.1	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
K.3.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.3											
S.3.1	0,16	0,11	0,09	0,035	0,18	0,12	0,10	0,040	●		
S.3.2	0,16	0,11	0,09	0,035	0,18	0,12	0,10	0,040	●		
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

Cutting data standard values – SilverLine – End mill

Index	Type long		50 558 ..., 50 958																		
			Ø DC (mm) =																		
			3,0			3,5–4,0			4,5–5,0			5,5–6,0			7,0–8,0			9,0–10,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	110	1,0*	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043
P.1.2	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.3	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.4	80	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.5	80	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.1	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.2	70	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.3	70	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.4	55	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.3.1																				
P.3.2																				
P.3.3																				
P.4.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
P.4.2	40	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.1.1	40	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.2.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.3.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
K.1.1	130	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.1.2	120	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.2.1	130	1,0*	0,040	0,032	0,020	0,048	0,038	0,024	0,056	0,045	0,028	0,064	0,051	0,032	0,079	0,063	0,040	0,095	0,076	0,048
K.2.2	120	1,0*	0,040	0,032	0,020	0,048	0,038	0,024	0,056	0,045	0,028	0,064	0,051	0,032	0,079	0,063	0,040	0,095	0,076	0,048
K.3.1	130	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.3.2	120	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	200	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.3.2	200	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.3.3	140	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.4.1																				
S.1.1	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.1.2	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.1	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.2	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.3	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.3.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
S.3.2	20	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

Plunging angle for ramping and helical milling = 6-10°

Index	50 558 ..., 50 958																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	11,0–12,0			14,0			15,0–16,0			17,0–18,0			19,0–20,0						
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																		
P.1.1	0,102	0,082	0,051	0,116	0,093	0,058	0,124	0,099	0,062	0,131	0,105	0,066	0,139	0,111	0,070	●	○	○
P.1.2	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.3	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.4	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.5	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.1	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.2	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.3	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.4	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
P.4.2	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.1.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.2.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.3.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
K.1.1	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.1.2	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.2.1	0,110	0,088	0,055	0,126	0,101	0,063	0,134	0,107	0,067	0,142	0,114	0,071	0,150	0,120	0,075	●	○	○
K.2.2	0,110	0,088	0,055	0,126	0,101	0,063	0,134	0,107	0,067	0,142	0,114	0,071	0,150	0,120	0,075	●	○	○
K.3.1	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.3.2	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.3.2	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.3.3	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.4.1																		
S.1.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
S.3.2	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data standard values – SilverLine – End mill

Index	Type short		Type long		Type extra long		50 966 ..., 50 967 ..., 50 992 ...														
							Ø DC (mm) =														
							3,0			3,5–4,0			4,5–5,0			5,5–6,0			6,5–8,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)														
P.1.1	252	1,0	210	1,0*	105	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.2	240	1,0	200	1,0*	100	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.3	240	1,0	200	1,0*	100	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.4	228	1,0	190	1,0*	95	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.1.5	228	1,0	190	1,0*	95	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.1	240	1,0	200	1,0*	100	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.2	228	1,0	190	1,0*	95	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.3	216	1,0	180	1,0*	90	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.2.4	204	1,0	170	1,0*	85	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
P.3.1																					
P.3.2																					
P.3.3																					
P.4.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
P.4.2	96	1,0	80	1,0*	50	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
M.1.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
M.2.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
M.3.1	120	1,0	100	1,0*	60	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
K.1.1	240	1,0	200	1,0*	100	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
K.1.2	216	1,0	180	1,0*	90	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
K.2.1	228	1,0	190	1,0*	60	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
K.2.2	204	1,0	170	1,0*	85	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
K.3.1	216	1,0	180	1,0*	90	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
K.3.2	192	1,0	160	1,0*	80	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	420	1,0	350	1,0*	175	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
N.3.2	420	1,0	350	1,0*	175	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
N.3.3	336	1,0	280	1,0*	140	0,8	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047
N.4.1																					
S.1.1	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.1.2	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.1	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.2	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.3	30	0,5	25	0,5	15	0,4	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.3.1	108	1,0	90	1,0*	45	0,8	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040
S.3.2	60	1,0	50	1,0*	25	0,8	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

"Extra-long" version: when profiling with an a_e of 0.1–0.4 x DC an a_p of 1.0 x DC should be used.

Plunging angle for ramping and helical milling: 3°

Index	50 966 ..., 50 967 ..., 50 992 ...																			● 1st choice ○ suitable		
	Ø DC (mm) =																					
	8,5–10,0			12,0			14,0			16,0			18,0			20,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																					
P.1.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.3	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.4	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.1.5	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.3	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.4	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.3.1																					
P.3.2																					
P.3.3																					
P.4.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
P.4.2	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.1.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.2.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.3.1	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
K.1.1	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.1.2	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
K.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
K.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
K.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	●	●
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●		
N.3.2	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●		
N.3.3	0,116	0,093	0,058	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●		
N.4.1																					
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●		
S.3.2	0,066	0,053	0,033	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – SilverLine – End mill

Index	Type long		50 976 ..., 50 977 ...															
			Ø DC (mm) =															
			3		4		5		6		8		10		12		14	
			a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	210	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.2	200	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.3	200	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.4	190	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.1.5	190	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.2.1	200	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.2.2	190	2,0	0,020	0,014	0,027	0,019	0,034	0,025	0,042	0,030	0,056	0,040	0,070	0,050	0,084	0,060	0,098	0,070
P.2.3	180	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.2.4	170	2,0	0,020	0,014	0,027	0,019	0,034	0,025	0,042	0,030	0,056	0,040	0,070	0,050	0,084	0,060	0,098	0,070
P.3.1	180	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.3.2	170	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.3.3	140	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
P.4.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
P.4.2	100	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
M.1.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
M.2.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
M.3.1	120	1,5	0,012	0,009	0,017	0,012	0,022	0,016	0,027	0,019	0,036	0,026	0,046	0,033	0,056	0,040	0,066	0,047
K.1.1	200	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
K.1.2	180	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
K.2.1	190	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
K.2.2	170	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
K.3.1	180	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
K.3.2	160	2,0	0,026	0,019	0,034	0,024	0,042	0,030	0,049	0,035	0,066	0,047	0,081	0,058	0,098	0,070	0,113	0,081
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	350	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
N.3.2	350	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
N.3.3	280	2,0	0,031	0,022	0,039	0,028	0,048	0,034	0,056	0,040	0,074	0,053	0,091	0,065	0,108	0,077	0,126	0,090
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Profiling with an a_e < 0.3xDC only possible under certain conditions!

Plunging angle for ramping and helical milling: 3°

Index	50 976 ..., 50 977 ...						● 1st choice ○ suitable		
	Ø DC (mm) =								
	16		18		20				
	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)								
P.1.1	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.2	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.3	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.4	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.1.5	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.2.1	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.2.2	0,105	0,075	0,112	0,080	0,119	0,085	●	○	○
P.2.3	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.2.4	0,105	0,075	0,112	0,080	0,119	0,085	●	○	○
P.3.1	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.3.2	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.3.3	0,121	0,087	0,129	0,092	0,137	0,098	●	○	○
P.4.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
P.4.2	0,071	0,051	0,076	0,054	0,081	0,058	●		
M.1.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
M.2.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
M.3.1	0,071	0,051	0,076	0,054	0,081	0,058	●		
K.1.1	0,134	0,096	0,143	0,102	0,151	0,108	●	●	●
K.1.2	0,134	0,096	0,143	0,102	0,151	0,108	●	●	●
K.2.1	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
K.2.2	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
K.3.1	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
K.3.2	0,121	0,087	0,129	0,092	0,137	0,098	●	●	●
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1	0,134	0,096	0,143	0,102	0,151	0,108	●	○	○
N.3.2	0,134	0,096	0,143	0,102	0,151	0,108	●	○	○
N.3.3	0,134	0,096	0,143	0,102	0,151	0,108	●	○	○
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – SilverLine – End mill

Index	Type extra long		50 970 ..., 50 971 ..., 50 974 ..., 50 975 ...																		
			Ø DC (mm) =																		
			3			4			5			6			8			10		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	160	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.3	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.4	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.1.5	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.1	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.3	120	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.2.4	120	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.3.1	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.3.2	80	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.3.3	80	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050
P.4.1	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
P.4.2	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
M.1.1	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
M.2.1	70	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
M.3.1	80	0,5	0,016	0,012	0,009	0,022	0,017	0,012	0,030	0,022	0,015	0,038	0,028	0,019	0,050	0,037	0,025	0,064	0,048	0,032
K.1.1	150	1,0	0,040	0,031	0,022	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,110	0,082	0,055
K.1.2	140	1,0	0,040	0,031	0,022	0,054	0,042	0,030	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,110	0,082	0,055
K.2.1	150	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
K.2.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
K.3.1	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
K.3.2	140	1,0	0,027	0,021	0,015	0,036	0,028	0,020	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,090	0,067	0,045
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	220	1,0	0,034	0,026	0,019	0,045	0,035	0,025	0,054	0,042	0,030	0,063	0,049	0,035	0,081	0,062	0,045	0,102	0,079	0,057
N.3.2	180	1,0	0,034	0,026	0,019	0,045	0,035	0,025	0,054	0,042	0,030	0,063	0,049	0,035	0,081	0,062	0,045	0,102	0,079	0,057
N.3.3	180	1,0	0,034	0,026	0,019	0,045	0,035	0,025	0,054	0,042	0,030	0,063	0,049	0,035	0,081	0,062	0,045	0,102	0,079	0,057
N.4.1																				
S.1.1	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.1.2	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.2.1	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.2.2	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.2.3	25	0,5	0,013	0,010	0,007	0,018	0,014	0,010	0,022	0,017	0,012	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025
S.3.1	80	0,5	0,027	0,021	0,015	0,036	0,028	0,020	0,045	0,035	0,025	0,054	0,042	0,030	0,072	0,055	0,040	0,090	0,069	0,050
S.3.2	70	0,5	0,020	0,015	0,011	0,027	0,021	0,015	0,032	0,025	0,018	0,040	0,031	0,022	0,054	0,042	0,030	0,072	0,055	0,040
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

Plunging angle for ramping and helical milling: 3°

Index	50 970 ..., 50 971 ..., 50 974 ..., 50 975 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	12			14			16			18			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.3	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.4	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.1.5	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.3	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.2.4	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.3.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.3.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.3.3	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	○	○
P.4.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
P.4.2	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
M.1.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
M.2.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
M.3.1	0,080	0,060	0,040	0,082	0,064	0,045	0,085	0,065	0,050	0,095	0,077	0,060	0,111	0,090	0,070	●		
K.1.1	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	●	●
K.1.2	0,120	0,089	0,060	0,128	0,099	0,070	0,135	0,103	0,080	0,142	0,116	0,090	0,158	0,129	0,100	●	●	●
K.2.1	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
K.2.2	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
K.3.1	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
K.3.2	0,100	0,075	0,050	0,100	0,078	0,055	0,101	0,077	0,060	0,103	0,084	0,065	0,111	0,090	0,070	●	●	●
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,126	0,097	0,070	0,153	0,118	0,085	0,180	0,139	0,100	0,198	0,153	0,110	0,216	0,166	0,120	●		
N.3.2	0,126	0,097	0,070	0,153	0,118	0,085	0,180	0,139	0,100	0,198	0,153	0,110	0,216	0,166	0,120	●		
N.3.3	0,126	0,097	0,070	0,153	0,118	0,085	0,180	0,139	0,100	0,198	0,153	0,110	0,216	0,166	0,120	●		
N.4.1																		
S.1.1	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.1.2	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.2.1	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.2.2	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.2.3	0,054	0,042	0,030	0,063	0,049	0,035	0,072	0,055	0,040	0,081	0,062	0,045	0,090	0,069	0,050	●		
S.3.1	0,108	0,083	0,060	0,126	0,097	0,070	0,144	0,111	0,080	0,162	0,125	0,090	0,180	0,139	0,100	●		
S.3.2	0,090	0,069	0,050	0,099	0,076	0,055	0,108	0,083	0,060	0,126	0,097	0,070	0,144	0,111	0,080	●		
S.3.3																●		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – SilverLine – End mill, roughing-finishing and rough milling cutter

Index	Type short	Type long		50 969 ..., 50 970..., 50 971 ..., 50 972 ..., 50 973 ..., 50 974 ..., 50 975 ..., 50 978 ..., 50 979 ...																		
				Ø DC (mm) =																		
				3,0			3,5–4,0			4,5–5,0			5,5–6,0			7,0–8,0			9,0–10,0		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)																		
P.1.1	253	230	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.2	242	220	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.3	242	220	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.4	230	210	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.1.5	230	210	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.2.1	242	220	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.2.2	230	210	1,0*	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050
P.2.3	220	200	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.2.4	210	190	1,0*	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050
P.3.1	220	200	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.3.2	210	190	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.3.3	176	160	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
P.4.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
P.4.2	100	90	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
M.1.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
M.2.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
M.3.1	120	110	1,0*	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
K.1.1	242	220	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
K.1.2	220	200	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
K.2.1	230	210	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
K.2.2	210	190	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
K.3.1	220	200	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
K.3.2	200	180	1,0*	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1	385	350	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
N.3.2	308	350	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
N.3.3	308	280	1,0*	0,046	0,037	0,023	0,062	0,050	0,031	0,078	0,062	0,039	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080
N.4.1																					
S.1.1	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.1.2	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.1	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.2	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.3	35	30	0,5	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.3.1	110	90	0,5	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050
S.3.2	70	50	0,5	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033
S.3.3																					
H.1.1																					
H.1.2																					
H.1.3																					
H.1.4																					
H.2.1																					
H.3.1																					
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

Plunging angle for ramping and helical milling: 3°

Index	50 969 ..., 50 970..., 50 971 ..., 50 972 ..., 50 973 ..., 50 974 ..., 50 975 ..., 50 978 ..., 50 979 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	11,0–12,0			14,0			15,0–16,0			17,0→18,0			19,0–20,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
P.1.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.3	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.4	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.1.5	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.2.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.2.2	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.2.3	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.2.4	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●	○	○
P.3.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.3.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.3.3	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	○	○
P.4.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
P.4.2	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.1.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.2.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
M.3.1	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
K.1.1	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●	●	●
K.1.2	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●	●	●
K.2.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.2.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.3.1	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
K.3.2	0,140	0,112	0,070	0,162	0,130	0,081	0,173	0,138	0,087	0,184	0,147	0,092	0,196	0,157	0,098	●	●	●
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●		
N.3.2	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●		
N.3.3	0,192	0,154	0,096	0,224	0,179	0,112	0,240	0,192	0,120	0,258	0,206	0,129	0,274	0,219	0,137	●		
N.4.1																		
S.1.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,120	0,096	0,060	0,140	0,112	0,070	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	●		
S.3.2	0,080	0,064	0,040	0,094	0,075	0,047	0,101	0,081	0,051	0,108	0,086	0,054	0,115	0,092	0,058	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data standard values – SilverLine – High-precision finish milling cutter

Index	Type long	Type extra long		50 991 ...							● 1st choice ○ suitable		
				Ø DC (mm) =									
				6	8	10	12	16	20	25			
				a_e 0,05 x DC									
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)							Emulsion	Compressed air	MMS
P.1.1	260	180	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.2	250	175	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.3	250	175	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.4	230	160	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.1.5	230	160	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.2.1	250	175	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.2.2	230	160	2,0	0,023	0,031	0,039	0,047	0,059	0,067	0,077	●		
P.2.3	220	155	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.2.4	210	145	2,0	0,023	0,031	0,039	0,047	0,059	0,067	0,077	●		
P.3.1	220	155	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.3.2	210	145	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.3.3	175	120	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
P.4.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
P.4.2	100	70	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
M.1.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
M.2.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
M.3.1	120	80	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
K.1.1	250	175	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
K.1.2	220	155	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
K.2.1	230	160	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
K.2.2	210	145	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
K.3.1	220	155	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
K.3.2	200	140	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1	430	300	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
N.3.2	430	300	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
N.3.3	350	245	2,0	0,035	0,047	0,058	0,070	0,087	0,098	0,112	●		
N.4.1													
S.1.1	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.1.2	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.2.1	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.2.2	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.2.3	40	30	2,0	0,015	0,020	0,025	0,030	0,038	0,042	0,048	●		
S.3.1	200	140	2,0	0,030	0,040	0,050	0,060	0,075	0,085	0,098	●		
S.3.2	125	85	2,0	0,019	0,026	0,033	0,040	0,051	0,058	0,066	●		
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Plunging angle for ramping and helical milling = 1°

Cutting data standard values – SilverLine – Radius milling cutters – 50 990 ... – Finish machining

Index	Type long		50 990 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
			4	5	6	8	10	12	16	20			
			a_e 0,05 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)								Emulsion	Compressed air	MMS
P.1.1	195	0,08	0,019	0,025	0,030	0,040	0,050	0,060	0,075	0,085	●	○	○
P.1.2	165	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.3	165	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.4	145	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.5	145	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.1	165	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.2	130	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.3	130	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.4	100	0,08	0,018	0,023	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.3.1													
P.3.2													
P.3.3													
P.4.1	90	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
P.4.2	75	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
M.1.1	75	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
M.2.1	90	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
M.3.1	90	0,08	0,011	0,014	0,017	0,023	0,029	0,035	0,044	0,050	●		
K.1.1	235	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
K.1.2	220	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
K.2.1	235	0,08	0,028	0,033	0,039	0,050	0,061	0,072	0,089	0,100	●		○
K.2.2	220	0,08	0,028	0,033	0,039	0,050	0,061	0,072	0,089	0,100	●		○
K.3.1	235	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
K.3.2	220	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●		○
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1	360	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●	○	○
N.3.2	360	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●	○	○
N.3.3	255	0,08	0,028	0,034	0,040	0,053	0,065	0,077	0,096	0,108	●	○	○
N.4.1													
S.1.1													
S.1.2													
S.2.1													
S.2.2													
S.2.3													
S.3.1													
S.3.2													
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Plunging angle for ramping and helical milling: 3°

Cutting data standard values – SilverLine – Radius milling cutters – 50 990 ... – Rough machining

Index	Type long		50 990 ...																			
			Ø DC (mm) =																			
			4			5			6			8			10			12				
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)																			
P.1.1	130	1,0	0,026	0,022	0,017	0,031	0,027	0,021	0,036	0,031	0,024	0,047	0,040	0,031	0,056	0,049	0,038	0,067	0,058	0,045		
P.1.2	110	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.1.3	110	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.1.4	95	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.1.5	95	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.2.1	110	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.2.2	85	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.2.3	85	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.2.4	65	1,0	0,021	0,018	0,014	0,026	0,022	0,017	0,031	0,027	0,021	0,041	0,035	0,027	0,050	0,043	0,033	0,059	0,051	0,040		
P.3.1																						
P.3.2																						
P.3.3																						
P.4.1	60	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030		
P.4.2	50	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030		
M.1.1	50	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030		
M.2.1	60	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030		
M.3.1	60	1,0	0,015	0,013	0,010	0,019	0,016	0,013	0,023	0,020	0,015	0,030	0,026	0,020	0,038	0,033	0,025	0,045	0,039	0,030		
K.1.1	155	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072		
K.1.2	145	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072		
K.2.1	155	1,0	0,032	0,027	0,021	0,038	0,033	0,025	0,044	0,038	0,029	0,054	0,047	0,036	0,065	0,056	0,043	0,077	0,066	0,051		
K.2.2	145	1,0	0,032	0,027	0,021	0,038	0,033	0,025	0,044	0,038	0,029	0,054	0,047	0,036	0,065	0,056	0,043	0,077	0,066	0,051		
K.3.1	155	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072		
K.3.2	145	1,0	0,042	0,036	0,028	0,050	0,043	0,033	0,059	0,051	0,039	0,075	0,065	0,050	0,092	0,079	0,061	0,108	0,094	0,072		
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1	240	1,0	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066		
N.3.2	240	1,0	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066		
N.3.3	170	1,0	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066		
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Plunging angle for ramping and helical milling: 3°

Index	50 990 ... Ø DC (mm) = 16 a_e 0,1–0,2 x DC f_z (mm)	16 a_e 0,3–0,4 x DC f_z (mm)	16 a_e 0,6–1,0 x DC f_z (mm)	20 a_e 0,1–0,2 x DC f_z (mm)	20 a_e 0,3–0,4 x DC f_z (mm)	20 a_e 0,6–1,0 x DC f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,083	0,072	0,055	0,092	0,080	0,062	●	○	○
P.1.2	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.1.3	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.1.4	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.1.5	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.1	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.2	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.3	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.2.4	0,074	0,064	0,050	0,083	0,072	0,056	●	○	○
P.3.1									
P.3.2									
P.3.3									
P.4.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
P.4.2	0,056	0,049	0,038	0,063	0,055	0,042	●		
M.1.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
M.2.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
M.3.1	0,056	0,049	0,038	0,063	0,055	0,042	●		
K.1.1	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
K.1.2	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
K.2.1	0,093	0,081	0,062	0,104	0,090	0,070	●	○	○
K.2.2	0,093	0,081	0,062	0,104	0,090	0,070	●	○	○
K.3.1	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
K.3.2	0,133	0,115	0,089	0,150	0,130	0,100	●	○	○
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1	0,125	0,108	0,083	0,141	0,122	0,094	●	○	○
N.3.2	0,125	0,108	0,083	0,141	0,122	0,094	●	○	○
N.3.3	0,125	0,108	0,083	0,141	0,122	0,094	●	○	○
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – SilverLine – Ball-nosed end mill

Index	Type short		Type long		50 963 ...																	
					Ø DC (mm) =																	
					3			4			5			6			7			8		
					a_e x DC																	
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05
					f_z (mm)																	
P.1.1	300	0,08	180	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.2	280	0,08	170	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.3	225	0,08	135	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.4	225	0,08	135	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.1.5	245	0,08	145	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.2.1	280	0,08	170	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.2.2	215	0,08	130	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
P.2.3	190	0,08	115	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.2.4	210	0,08	125	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.3.1	210	0,08	125	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
P.3.2	175	0,08	105	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
P.3.3	130	0,08	80	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
P.4.1																						
P.4.2																						
M.1.1																						
M.2.1																						
M.3.1																						
K.1.1	330	0,08	200	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.1.2	280	0,08	170	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.2.1	330	0,08	200	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.2.2	280	0,08	170	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
K.3.1	330	0,08	200	0,06	0,072	0,058	0,036	0,094	0,075	0,047	0,118	0,094	0,059	0,142	0,114	0,071	0,166	0,133	0,083	0,190	0,152	0,095
K.3.2	280	0,08	170	0,06	0,058	0,046	0,029	0,076	0,061	0,038	0,092	0,074	0,046	0,110	0,088	0,055	0,128	0,102	0,064	0,146	0,117	0,073
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1																						
N.3.2																						
N.3.3	455	0,08	275	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1	100	0,08	60	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.1.2	60	0,08	35	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.1.3	55	0,08	35	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.1.4																						
H.2.1	70	0,08	40	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
H.3.1	100	0,08	60	0,06	0,046	0,037	0,023	0,058	0,046	0,029	0,068	0,054	0,034	0,080	0,064	0,040	0,091	0,073	0,046	0,102	0,082	0,051
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

Plunging angle for ramping and helical milling: 3°

Index	50 963 ...																		● 1st choice ○ suitable		
	Ø DC (mm) =																				
	10			12			14			16			18			20					
	a_e x DC																				
	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	0,01–0,02	0,03–0,04	0,05	Emulsion	Compressed air	MMS
	f_z (mm)																				
P.1.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.2	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.3	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.4	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.1.5	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.2.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
P.2.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
P.2.3	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,025	0,500	0,400	0,250	●	○	○
P.2.4	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,025	0,500	0,400	0,250	●	○	○
P.3.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,025	0,500	0,400	0,250	●	○	○
P.3.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
P.3.3	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,180	0,144	0,090	0,210	0,168	0,105	0,240	0,192	0,120	●	○	○
P.4.1																					
P.4.2																					
M.1.1																					
M.2.1																					
M.3.1																					
K.1.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.1.2	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.2.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.2.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
K.3.1	0,238	0,190	0,119	0,286	0,229	0,143	0,334	0,267	0,167	0,400	0,320	0,200	0,450	0,360	0,225	0,500	0,400	0,250	●	○	○
K.3.2	0,180	0,144	0,090	0,216	0,173	0,108	0,250	0,200	0,125	0,300	0,240	0,150	0,350	0,280	0,175	0,400	0,320	0,200	●	○	○
N.1.1																					
N.1.2																					
N.2.1																					
N.2.2																					
N.2.3																					
N.3.1																					
N.3.2																					
N.3.3	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,180	0,144	0,090	0,210	0,168	0,105	0,240	0,192	0,120	●		
N.4.1																					
S.1.1																					
S.1.2																					
S.2.1																					
S.2.2																					
S.2.3																					
S.3.1																					
S.3.2																					
S.3.3																					
H.1.1	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.1.2	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.1.3	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.1.4																					
H.2.1	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
H.3.1	0,124	0,099	0,062	0,146	0,117	0,073	0,168	0,134	0,084	0,179	0,143	0,090	0,190	0,152	0,095	0,200	0,160	0,100		●	
O.1.1																					
O.1.2																					
O.2.1																					
O.2.2																					
O.3.1																					

14

Cutting data standard values – SilverLine – Torus face cutter

Index	Type long	Type extra long		50 989 ...															
				Ø DC (mm) =															
				6			8			10			12			16			
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,5 x DC
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	**240**	**190**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.2	**210**	**170**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.3	**210**	**170**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.4	**190**	**150**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.1.5	**190**	**150**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.1	**220**	**175**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.2	**200**	**160**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.3	**180**	**145**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.2.4	**170**	**135**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.3.1	**170**	**135**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.3.2	**150**	**120**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.3.3	**120**	**95**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.4.1	**90**	**70**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
P.4.2	**70**	**55**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
M.1.1	90	70	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
M.2.1	90	70	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
M.3.1	90	70	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.1.1	**250**	**200**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.1.2	**230**	**185**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.2.1	**200**	**160**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.2.2	**180**	**145**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.3.1	**220**	**175**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
K.3.2	**210**	**170**	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3	250	200	0,03	0,360	0,288	0,180	0,460	0,368	0,230	0,560	0,448	0,280	0,660	0,528	0,330	0,814	0,651	0,407
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1	120	95	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
H.1.2	80	65	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
H.1.3																		
H.1.4																		
H.2.1	120	95	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
H.3.1	120	95	0,03	0,240	0,192	0,120	0,330	0,264	0,165	0,420	0,336	0,210	0,510	0,408	0,255	0,644	0,515	0,322
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	50 989 ... Ø DC (mm) = 20 a_e 0,1–0,2 x DC f_z (mm)	a_e 0,3–0,4 x DC f_z (mm)	a_e 0,5 x DC f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,912	0,730	0,456	●	○	○
P.1.2	0,912	0,730	0,456	●	○	○
P.1.3	0,912	0,730	0,456	●	○	○
P.1.4	0,912	0,730	0,456	●	○	○
P.1.5	0,912	0,730	0,456	●	○	○
P.2.1	0,912	0,730	0,456	●	○	○
P.2.2	0,912	0,730	0,456	●	○	○
P.2.3	0,912	0,730	0,456	●	○	○
P.2.4	0,912	0,730	0,456	●	○	○
P.3.1	0,912	0,730	0,456	●	○	○
P.3.2	0,912	0,730	0,456	●	○	○
P.3.3	0,912	0,730	0,456	●	○	○
P.4.1	0,912	0,730	0,456	●		
P.4.2	0,912	0,730	0,456	●		
M.1.1	0,912	0,730	0,456	●		
M.2.1	0,912	0,730	0,456	●		
M.3.1	0,912	0,730	0,456	●		
K.1.1	0,912	0,730	0,456	●	○	○
K.1.2	0,912	0,730	0,456	●	○	○
K.2.1	0,912	0,730	0,456	●	○	○
K.2.2	0,912	0,730	0,456	●	○	○
K.3.1	0,912	0,730	0,456	●	○	○
K.3.2	0,912	0,730	0,456	●	○	○
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3	0,912	0,730	0,456	●	○	○
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1	0,736	0,589	0,368		●	●
H.1.2	0,736	0,589	0,368		●	●
H.1.3						
H.1.4						
H.2.1	0,736	0,589	0,368		●	●
H.3.1	0,736	0,589	0,368		●	●
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – S-Cut – End mill, short – long

Index	Type short / long		52 205 ..., 52 223 ..., 52 224 ..., 52 225 ..., 52 228 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	150	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
P.1.2	150	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.1.3	130	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.1.4	140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.1.5	120	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.1	140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.2	120	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.3	140	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.2.4	120	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
P.3.1	100	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
P.3.2	120	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	
P.3.3	100	1,0	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	
P.4.1	130	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
P.4.2	110	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
M.1.1	100	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
M.2.1	50	1,0	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035	
M.3.1	100	1,0	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,030	0,081	0,058	0,046	
K.1.1	200	1,0	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081	
K.1.2	200	1,0	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081	
K.2.1	220	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
K.2.2	200	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
K.3.1	180	1,0	0,039	0,030	0,022	0,054	0,041	0,030	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069	
K.3.2	160	1,0	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
N.3.2	250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
N.3.3	250	1,0	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069	
N.4.1																		
S.1.1	50	0,5	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035	
S.1.2	50	0,5	0,020	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,020	0,053	0,039	0,026	0,069	0,029	0,035	
S.2.1	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	
S.2.2	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	
S.2.3	30	0,5	0,018	0,014	0,010	0,025	0,020	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035	
S.3.1	120	0,5	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058	
S.3.2	110	0,5	0,029	0,022	0,016	0,040	0,031	0,022	0,058	0,043	0,029	0,076	0,056	0,038	0,104	0,081	0,058	
S.3.3	75	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046	
H.1.1	120	0,5	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	
H.1.2	120	0,3	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	
H.1.3	120	0,2	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046	
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.
With an a_p of 2.0 x DC the f_z should be multiplied by 0.5.

Plunging angle for ramping and helical milling: 3°

Index	52 205 ..., 52 223 ..., 52 224 ..., 52 225 ..., 52 228 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	10			12			16			20			25						
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																		
P.1.1	0,161	0,115	0,081	0,173	0,127	0,029	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●	○	○
P.1.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.1.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.1.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.1.5	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.2.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	●	○	○
P.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
P.3.2	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
P.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●	○	○
P.4.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
P.4.2	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
M.1.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
M.2.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
M.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,150	0,115	0,092	0,190	0,146	0,117	●		
K.1.1	0,207	0,150	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,230	0,184	0,365	0,292	0,234	○	●	○
K.1.2	0,207	0,150	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,230	0,184	0,365	0,292	0,234	○	●	○
K.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	○	●	○
K.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	○	●	○
K.3.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,307	0,248	0,204	○	●	○
K.3.2	0,150	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,263	0,219	0,161	○	●	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,127	0,230	0,184	0,138	0,292	0,234	0,175	●		○
N.3.2	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,127	0,230	0,184	0,138	0,292	0,234	0,175	●		○
N.3.3	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,150	0,115	0,230	0,184	0,138	0,292	0,234	0,175	●		○
N.4.1																		
S.1.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
S.1.2	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,161	0,131	0,102	●		
S.2.1	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
S.2.2	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
S.2.3	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,146	0,117	0,088	●		
S.3.1	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
S.3.2	0,127	0,092	0,069	0,138	0,104	0,069	0,150	0,115	0,092	0,184	0,150	0,115	0,234	0,190	0,146	●		
S.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,204	0,175	0,131	●		
H.1.1	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117		●	
H.1.2	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117		●	
H.1.3	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,190	0,161	0,117		●	
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – S-Cut– End mill, extra long

Index	Type extra long			52 205 ..., 52 226 ..., 52 227 ...														
				Ø DC (mm) =														
				3			4			5			6			8		
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC		f_z (mm)														
P.1.1	130	1,0	0,5	0,036	0,028	0,02	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
P.1.2	120	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.1.3	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.1.4	120	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.1.5	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.1	110	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.2	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.3	100	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.2.4	90	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
P.3.1	70	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
P.3.2	100	1,0	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
P.3.3	90	1,0	0,5	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
P.4.1	70	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
P.4.2	60	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
M.1.1	60	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
M.2.1	40	1,0	0,5	0,02	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,02	0,053	0,039	0,026	0,069	0,029	0,035
M.3.1	60	1,0	0,5	0,023	0,017	0,013	0,032	0,024	0,017	0,046	0,035	0,023	0,061	0,045	0,03	0,081	0,058	0,046
K.1.1	180	1,0	0,5	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081
K.1.2	140	1,0	0,5	0,046	0,036	0,025	0,063	0,049	0,036	0,091	0,068	0,046	0,122	0,091	0,061	0,161	0,127	0,081
K.2.1	180	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
K.2.2	140	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
K.3.1	140	1,0	0,5	0,039	0,030	0,022	0,054	0,041	0,03	0,078	0,058	0,039	0,104	0,077	0,052	0,138	0,104	0,069
K.3.2	120	1,0	0,5	0,032	0,025	0,018	0,046	0,036	0,025	0,066	0,048	0,032	0,087	0,064	0,044	0,115	0,092	0,058
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	250	1,0	0,5	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
N.3.2	250	1,0	0,5	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
N.3.3	250	1,0	0,5	0,036	0,028	0,020	0,049	0,038	0,028	0,071	0,053	0,036	0,095	0,071	0,047	0,127	0,092	0,069
N.4.1																		
S.1.1	40	0,5	0,25	0,02	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,02	0,053	0,039	0,026	0,069	0,029	0,035
S.1.2	40	0,5	0,25	0,02	0,015	0,012	0,028	0,021	0,015	0,039	0,029	0,02	0,053	0,039	0,026	0,069	0,029	0,035
S.2.1	25	0,5	0,25	0,018	0,014	0,010	0,025	0,02	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
S.2.2	25	0,5	0,25	0,018	0,014	0,010	0,025	0,02	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
S.2.3	25	0,5	0,25	0,018	0,014	0,010	0,025	0,02	0,014	0,037	0,026	0,018	0,048	0,036	0,024	0,069	0,046	0,035
S.3.1	50	0,5	0,25	0,029	0,022	0,016	0,040	0,031	0,023	0,058	0,044	0,029	0,077	0,058	0,039	0,104	0,081	0,058
S.3.2	40	0,5	0,25	0,029	0,022	0,016	0,040	0,031	0,022	0,058	0,043	0,029	0,076	0,056	0,038	0,104	0,081	0,058
S.3.3	40	0,5	0,25	0,025	0,020	0,015	0,036	0,028	0,021	0,052	0,039	0,026	0,069	0,052	0,035	0,092	0,069	0,046
H.1.1	100	0,5	0,5	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
H.1.2	100	0,5	0,3	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
H.1.3	100	0,5	0,15	0,023	0,018	0,013	0,032	0,025	0,018	0,047	0,035	0,023	0,062	0,046	0,031	0,081	0,058	0,046
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	52 205 ..., 52 226 ..., 52 227 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	10			12			16			20			25						
	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																		
P.1.1	0,161	0,115	0,081	0,173	0,127	0,029	0,184	0,15	0,115	0,23	0,184	0,138	0,276	0,23	0,184	●	○	○
P.1.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.1.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.1.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.1.5	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.3	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.2.4	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	●	○	○
P.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,15	0,115	●		
P.3.2	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
P.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●	○	○
P.4.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
P.4.2	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
M.1.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
M.2.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,15	0,127	0,104	●		
M.3.1	0,104	0,081	0,046	0,115	0,081	0,058	0,115	0,092	0,069	0,15	0,115	0,092	0,184	0,150	0,115	●		
K.1.1	0,207	0,15	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,23	0,184	0,345	0,288	0,230	○	●	○
K.1.2	0,207	0,15	0,104	0,219	0,161	0,115	0,242	0,184	0,138	0,288	0,23	0,184	0,345	0,288	0,230	○	●	○
K.2.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
K.2.2	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
K.3.1	0,173	0,127	0,092	0,196	0,138	0,092	0,207	0,161	0,127	0,242	0,196	0,161	0,288	0,242	0,196	○	●	○
K.3.2	0,15	0,104	0,069	0,161	0,115	0,081	0,173	0,127	0,104	0,207	0,173	0,127	0,242	0,207	0,173	○	●	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,15	0,127	0,23	0,184	0,138	0,276	0,230	0,184	●		○
N.3.2	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,15	0,127	0,23	0,184	0,138	0,276	0,230	0,184	●		○
N.3.3	0,161	0,115	0,081	0,173	0,127	0,092	0,184	0,15	0,115	0,23	0,184	0,138	0,276	0,230	0,184	●		○
N.4.1																		
S.1.1	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,15	0,127	0,104	●		
S.1.2	0,092	0,069	0,046	0,092	0,069	0,046	0,104	0,081	0,058	0,127	0,104	0,081	0,15	0,127	0,104	●		
S.2.1	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
S.2.2	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
S.2.3	0,081	0,058	0,046	0,092	0,035	0,046	0,092	0,069	0,058	0,115	0,092	0,069	0,138	0,115	0,092	●		
S.3.1	0,127	0,092	0,069	0,138	0,104	0,069	0,15	0,115	0,092	0,184	0,15	0,115	0,219	0,184	0,15	●		
S.3.2	0,127	0,092	0,069	0,138	0,104	0,069	0,15	0,115	0,092	0,184	0,15	0,115	0,219	0,184	0,15	●		
S.3.3	0,115	0,092	0,058	0,127	0,092	0,069	0,138	0,104	0,081	0,161	0,138	0,104	0,184	0,161	0,138	●		
H.1.1	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
H.1.2	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
H.1.3	0,104	0,081	0,058	0,115	0,081	0,058	0,127	0,092	0,069	0,150	0,127	0,092	0,173	0,150	0,127		●	
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

14

Cutting data standard values – S-Cut – End mills – SC-UNI, ZEFP = 5, long

Index	Type long	max. angle of engagement	52 230 ...															
			Ø DC (mm) =															
			6				8				10				12			
			a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	a_e 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m
	v_c (m/min)		f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
P.1.2	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.1.3	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.1.4	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.1.5	260	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.2.1	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
P.2.2	280	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
P.2.3	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.2.4	280	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.3.1	160	50°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
P.3.2	220	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.3.3	220	50°	0,112	0,079	0,065	0,025	0,143	0,101	0,083	0,032	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
P.4.1	180	50°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
P.4.2	180	50°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
M.1.1	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
M.2.1	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
M.3.1	140	45°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
K.1.1	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.1.2	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.2.1	300	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.2.2	260	50°	0,134	0,095	0,077	0,030	0,157	0,111	0,090	0,035	0,201	0,142	0,116	0,045	0,255	0,180	0,147	0,057
K.3.1	260	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
K.3.2	200	50°	0,112	0,079	0,065	0,025	0,157	0,111	0,090	0,035	0,179	0,126	0,103	0,040	0,228	0,161	0,132	0,051
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	140	40°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
S.1.2	140	40°	0,080	0,057	0,046	0,018	0,098	0,070	0,057	0,022	0,125	0,089	0,072	0,028	0,161	0,114	0,093	0,036
S.2.1	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
S.2.2	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
S.2.3	60	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
S.3.1	140	40°	0,045	0,032	0,026	0,010	0,072	0,051	0,041	0,016	0,089	0,063	0,052	0,020	0,112	0,079	0,065	0,025
S.3.2	120	40°	0,045	0,032	0,026	0,010	0,072	0,051	0,041	0,016	0,089	0,063	0,052	0,020	0,112	0,079	0,065	0,025
S.3.3	100	40°	0,045	0,032	0,026	0,010	0,054	0,038	0,031	0,012	0,067	0,047	0,039	0,015	0,085	0,060	0,049	0,019
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting depth corresponding to the cutting length

Index	52 230 ... Ø DC (mm) = 16 a_p 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	20 a_p 0,050 x DC	a_e 0,1 x DC	a_e 0,150 x DC	h_m	● 1st choice ○ suitable Emulsion	Compressed air	MMS
	f_z (mm)				f_z (mm)						
P.1.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
P.1.2	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.1.3	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.1.4	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.1.5	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.2.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
P.2.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
P.2.3	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.2.4	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.3.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
P.3.2	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.3.3	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
P.4.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
P.4.2	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
M.1.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
M.2.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
M.3.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
K.1.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.1.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.2.1	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.2.2	0,291	0,206	0,168	0,065	0,335	0,237	0,194	0,075	○	●	○
K.3.1	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
K.3.2	0,268	0,190	0,155	0,060	0,291	0,206	0,168	0,065	○	●	○
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
S.1.2	0,188	0,133	0,108	0,042	0,268	0,190	0,155	0,060	●		
S.2.1	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
S.2.2	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
S.2.3	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
S.3.1	0,157	0,111	0,090	0,035	0,219	0,155	0,127	0,049	●		
S.3.2	0,157	0,111	0,090	0,035	0,219	0,155	0,127	0,049	●		
S.3.3	0,116	0,082	0,067	0,026	0,161	0,114	0,093	0,036	●		
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

Cutting data standard values – 3D Finish – barrel shape

Index	v_c (m/min)	52 739 ... Ø DC (mm) = 10 a_e 0,05–0,10 f_z (mm)	a_e 0,10–0,20 f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	280	0,07	0,06	●	●	○
P.1.2	250	0,07	0,05	●	●	○
P.1.3	250	0,07	0,05	●	●	○
P.1.4	250	0,07	0,05	●	●	○
P.1.5	250	0,07	0,05	●	●	○
P.2.1	250	0,07	0,05	●	●	○
P.2.2	250	0,07	0,05	●	●	○
P.2.3	210	0,06	0,04	●	●	○
P.2.4	210	0,06	0,04	●	●	○
P.3.1	210	0,06	0,04	●	●	○
P.3.2	200	0,05	0,03		●	
P.3.3	200	0,05	0,03		●	
P.4.1	80	0,05	0,03	●		○
P.4.2	80	0,05	0,03	●		○
M.1.1	60	0,04	0,02	●		○
M.2.1	60	0,04	0,02	●		○
M.3.1	60	0,04	0,02	●		○
K.1.1	280	0,08	0,06		●	
K.1.2	280	0,08	0,06		●	
K.2.1	250	0,07	0,05		●	
K.2.2	250	0,07	0,05		●	
K.3.1	140	0,04	0,03		●	
K.3.2	140	0,04	0,03		●	
N.1.1	600	0,07	0,05	●		○
N.1.2	600	0,06	0,04	●		○
N.2.1	410	0,07	0,05	●		○
N.2.2						
N.2.3						
N.3.1	180	0,08	0,06	●	○	○
N.3.2	180	0,08	0,06	●		○
N.3.3	180	0,08	0,06	●		○
N.4.1	410	0,10	0,08	●		○
S.1.1	30	0,04	0,02	●		
S.1.2	30	0,04	0,02	●		
S.2.1	30	0,04	0,02	●		
S.2.2	30	0,04	0,02	●		
S.2.3	30	0,04	0,02	●		
S.3.1	100	0,04	0,02	●		
S.3.2	80	0,04	0,02	●		
S.3.3	60	0,04	0,02	●		
H.1.1	100	0,05	0,03		●	
H.1.2						
H.1.3						
H.1.4						
H.2.1	130	0,05	0,03		●	
H.3.1	100	0,05	0,03		●	
O.1.1	410	0,10	0,08	●	○	○
O.1.2	600	0,10	0,08	●		○
O.2.1						
O.2.2						
O.3.1						

In order to calculate the rotational speed n, the diameter DC has to be used.

Cutting data standard values – 3D Finish – oval shape

● 1st choice
○ suitable

Index	v_c (m/min)	52 745 ... Ø DC (mm) = 6			8			10			12			16			Emulsion	Compressed air	MMS
		a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,2–0,3			
		f_z (mm)																	
P.1.1	280	0,04	0,04	0,04	0,06	0,06	0,05	0,07	0,07	0,06	0,08	0,08	0,07	0,11	0,11	0,10	●	●	○
P.1.2	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.1.3	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.1.4	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.1.5	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.2.1	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.2.2	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●	●	○
P.2.3	210	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●	●	○
P.2.4	210	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●	●	○
P.3.1	210	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●	●	○
P.3.2	200	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
P.3.3	200	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
P.4.1	80	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		○
P.4.2	80	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		○
M.1.1	60	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		○
M.2.1	60	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		○
M.3.1	60	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		○
K.1.1	280	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10		●	
K.1.2	280	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10		●	
K.2.1	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08		●	
K.2.2	250	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08		●	
K.3.1	140	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03		●	
K.3.2	140	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03		●	
N.1.1	600	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●		○
N.1.2	600	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●		○
N.2.1	410	0,04	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,08	0,07	0,06	0,11	0,10	0,08	●		○
N.2.2																			
N.2.3																			
N.3.1	180	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10	●	○	○
N.3.2	180	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10	●		○
N.3.3	180	0,05	0,04	0,04	0,06	0,06	0,05	0,08	0,07	0,06	0,10	0,08	0,07	0,13	0,11	0,10	●		○
N.4.1	410	0,06	0,05	0,05	0,08	0,06	0,06	0,10	0,08	0,08	0,12	0,10	0,10	0,16	0,13	0,13	●		○
S.1.1	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.1.2	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.2.1	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.2.2	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.2.3	30	0,02	0,02	0,01	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,05	0,03	●		
S.3.1	100	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,07	0,06	0,05	0,10	0,08	0,06	●		
S.3.2	80	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		
S.3.3	60	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05	●		
H.1.1	100	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1	130	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
H.3.1	100	0,03	0,02	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,04	0,08	0,06	0,05		●	
O.1.1	410	0,06	0,05	0,05	0,08	0,06	0,06	0,10	0,08	0,08	0,12	0,10	0,10	0,16	0,13	0,13	●	○	○
O.1.2	600	0,06	0,05	0,05	0,08	0,06	0,06	0,10	0,08	0,08	0,12	0,10	0,10	0,16	0,13	0,13	●		○
O.2.1																			
O.2.2																			
O.3.1																			

In order to calculate the rotational speed n, the diameter DC has to be used.

14

Cutting data standard values – 3D Finish – taper shape

Index	v_c (m/min)	52 753 ..., 52 755 ...										● 1st choice ○ suitable		
		Ø DC (mm) =												
		6		8		10		12		16				
		a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	a_e 0,05–0,10	a_e 0,1–0,2	Emulsion	Compressed air	MMS
		f_z (mm)												
P.1.1	280	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.2	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.3	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.4	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.1.5	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.2.1	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.2.2	250	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●	●	○
P.2.3	210	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,08	0,05	●	●	○
P.2.4	210	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,08	0,05	●	●	○
P.3.1	210	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,08	0,05	●	●	○
P.3.2	200	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
P.3.3	200	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
P.4.1	80	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	●		○
P.4.2	80	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	●		○
M.1.1	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		○
M.2.1	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		○
M.3.1	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		○
K.1.1	280	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,11	0,08		●	
K.1.2	280	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,11	0,08		●	
K.2.1	250	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08		●	
K.2.2	250	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08		●	
K.3.1	140	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03		●	
K.3.2	140	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03		●	
N.1.1	600	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●		○
N.1.2	600	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05	0,08	0,06	●		○
N.2.1	410	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	0,10	0,06	●		○
N.2.2														
N.2.3														
N.3.1	180	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08	●	○	○
N.3.2	180	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08	●		○
N.3.3	180	0,04	0,03	0,05	0,04	0,06	0,05	0,07	0,06	0,10	0,08	●		○
N.4.1	410	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	0,16	0,13	●		○
S.1.1	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.1.2	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.2.1	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.2.2	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.2.3	30	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.3.1	100	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.3.2	80	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
S.3.3	60	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,02	0,05	0,03	●		
H.1.1	100	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
H.1.2														
H.1.3														
H.1.4														
H.2.1	130	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
H.3.1	100	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04	0,06	0,05		●	
O.1.1	410	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	0,16	0,13	●	○	○
O.1.2	600	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	0,16	0,13	●		○
O.2.1														
O.2.2														
O.3.1														

In order to calculate the rotational speed n, the diameter DC has to be used.

Cutting data standard values – 3D Finish – lens shape

Index	v_c (m/min)	52 756 ... Ø DC (mm) = 4		6		8		10		12		● 1st choice ○ suitable: Emulsion	Compressed air	MMS
		Allowance 0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2	0,05–0,10	0,1–0,2			
		f_z (mm)												
P.1.1	280	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.2	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.3	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.4	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.1.5	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.2.1	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.2.2	240	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●	●	○
P.2.3	200	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●	●	○
P.2.4	200	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●	●	○
P.3.1	200	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●	●	○
P.3.2	180	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04		●	
P.3.3	180	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04		●	
P.4.1	120	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		○
P.4.2	120	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		○
M.1.1	90	0,02	0,01	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,02	●		○
M.2.1	90	0,02	0,01	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,02	●		○
M.3.1	90	0,02	0,01	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,02	●		○
K.1.1	300	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07		●	
K.1.2	300	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07		●	
K.2.1	270	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06		●	
K.2.2	270	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06		●	
K.3.1	150	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04		●	
K.3.2	150	0,02	0,01	0,02	0,02	0,03	0,02	0,04	0,03	0,05	0,04		●	
N.1.1	900	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●		○
N.1.2	900	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●		○
N.2.1	600	0,03	0,02	0,04	0,03	0,06	0,04	0,07	0,05	0,08	0,06	●		○
N.2.2														
N.2.3														
N.3.1	270	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07	●	○	○
N.3.2	270	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07	●		○
N.3.3	270	0,03	0,02	0,05	0,04	0,06	0,05	0,08	0,06	0,10	0,07	●		○
N.4.1	600	0,04	0,03	0,06	0,05	0,08	0,06	0,10	0,08	0,12	0,10	●		○
S.1.1														
S.1.2														
S.2.1														
S.2.2														
S.2.3														
S.3.1	150	0,02	0,02	0,04	0,02	0,05	0,03	0,06	0,04	0,07	0,05	●		
S.3.2	120	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		
S.3.3	90	0,02	0,01	0,03	0,02	0,04	0,02	0,05	0,03	0,06	0,04	●		
H.1.1														
H.1.2														
H.1.3														
H.1.4														
H.2.1														
H.3.1														
O.1.1														
O.1.2														
O.2.1														
O.2.2														
O.3.1														

In order to calculate the rotational speed n, the diameter DC has to be used.

Cutting data standard values – PCD milling cutter

Index	v_c (m/min)	50 011 ..., 50 012 ...		50 010 ..., 50 013 ...		50 014 ...		50 015 ...			
		$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e
N.1.1	900	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.1.2	900	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.2.1	700	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.2.2	600	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.2.3	400	0,15xDC	1xDC	1xDC	0,1xDC	0,15xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.3.1	500							0,9xAPMX	0,3xDC	0,1xDC	1xDC
N.3.2											
N.3.3											
N.4.1	900							0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.1.1	120	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.1.2	250	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.2.1											
O.2.2	200–300	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC
O.3.1	650	0,2xDC	1xDC	1xDC	0,1xDC	0,2xDC	0,1xDC	0,9xAPMX	0,3xDC	0,1xDC	1xDC

Index	v_c (m/min)	50 016 ..., 50 017 ...				50 018 ...				50 020 ...			
		$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e
N.1.1	900	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.1.2	900	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.2.1	700	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.2.2	600	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.2.3	400	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.3.1	500	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
N.3.2													
N.3.3													
N.4.1	900	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.1.1	120	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.1.2	250	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.2.1													
O.2.2	200–300	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC
O.3.1	650	0,9xAPMX	0,3xDC	0,1xDC	1xDC	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	1,2xAPMX	0,2xDC	1xDC	1xDC

● 1st choice
○ suitable

Index	v_c (m/min)	50 019 ...				Ø DC (mm) =						Emulsion	Compressed air	MMS
						40	50	63	80	100	125			
		$a_{p\,max.}$ x DC	a_e	$a_{p\,max.}$ x DC	a_e	f_z (mm)								
N.1.1	2200	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.1.2	2100	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.2.1	1850	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.2.2	1850	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.2.3	1750	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.3.1	1000–1500	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
N.3.2														
N.3.3														
N.4.1	2200	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,150	0,150	0,150	0,150	0,150	0,150	●		○
O.1.1														
O.1.2														
O.2.1														
O.2.2	500–600	0,8xAPMX	0,3xDC	0,1xDC	0,8xDC	0,230	0,230	0,230	0,230	0,230	0,230	●		○
O.3.1														

Index	50 010 ..., 50 011 ..., 50 012 ..., 50 013 ..., 50 014 ..., 50 015 ...												● 1st choice ○ suitable		
	Ø DC (mm) =												Emulsion	Compressed air	MMS
	2	3	4	5	6	8	10	12	16	20	25	32			
	f_z (mm)														
N.1.1	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.1.2	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.1	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.2	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.3	0,018	0,027	0,035	0,048	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.2															
N.3.3															
N.4.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
O.1.1	0,025	0,038	0,050	0,071	0,100	0,150	0,200	0,250	0,300	0,400	0,440	0,460	●		○
O.1.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○
O.2.1															
O.2.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,20	0,220	0,260	●		○
O.3.1	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,20	0,220	0,260	●		○

Index	50 016 ..., 50 017 ..., 50 018 ..., 50 020 ...												● 1st choice ○ suitable		
	Ø DC (mm) =												Emulsion	Compressed air	MMS
	2	3	4	5	6	8	10	12	16	20	25	32			
	f_z (mm)														
N.1.1	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.1.2	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.1	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.2	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.2.3	0,018	0,027	0,035	0,0475	0,060	0,065	0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
N.3.2															
N.3.3															
N.4.1							0,070	0,080	0,090	0,120	0,140	0,160	●		○
O.1.1	0,025	0,038	0,050	0,0705	0,100	0,150	0,200	0,250	0,300	0,400	0,440	0,460	●		○
O.1.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○
O.2.1															
O.2.2	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○
O.3.1	0,021	0,031	0,040	0,050	0,060	0,070	0,080	0,115	0,150	0,200	0,220	0,260	●		○

Cutting data standard values – AluLine – End mills – ZEFP = 2

Index	Type short		Medium-length version		53 623..., 53 624..., 53 625..., 53 626..., 53 633..., 53 634..., 53 635..., 53 636..., 53 619..., 53 620..., 53 621..., 53 622..., 53 629..., 53 630..., 53 631..., 53 632..., 52 627..., 53 628..., 53 637..., 53 638...																	
					Ø DC (mm) =																	
					2			2,5–3,0			3,5–4,0			4,5–5,0			5,5–6,0			6,5–8,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
					f_z (mm)																	
N.1.1	600	1,0	360	0,7	0,032	0,027	0,021	0,045	0,039	0,030	0,057	0,049	0,038	0,071	0,061	0,047	0,084	0,073	0,056	0,110	0,095	0,073
N.1.2	600	1,0	360	0,7	0,032	0,027	0,021	0,045	0,039	0,030	0,057	0,049	0,038	0,071	0,061	0,047	0,084	0,073	0,056	0,110	0,095	0,073
N.2.1	360	1,0	215	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.2.2	360	1,0	215	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.2.3	240	1,0	145	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.3.1	240	1,0	145	0,7	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039	0,078	0,068	0,052
N.3.2	240	1,0	145	0,7	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039	0,078	0,068	0,052
N.3.3	170	1,0	100	0,7	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039	0,078	0,068	0,052
N.4.1	220	1,0	130	0,7	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063

Cutting data standard values – AluLine – End mill – ZEFP = 3

Index	Type short / medium length		Type long		Type extra long		53 615..., 53 616..., 53 617..., 53 618..., 53 611..., 53 612..., 53 613..., 53 614..., 53 712..., 53 713..., 53 714..., 53 715..., 53 708..., 53 709..., 53 710..., 53 711..., 53 584..., 53 597...,													
							Ø DC (mm) =															
							2			2,5–3,0			3,5–4,0			4,5–5,0			5,5–6,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)															
N.1.1	600	1,0	480	0,8	240	0,6	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047
N.1.2	600	1,0	480	0,8	240	0,6	0,023	0,020	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047
N.2.1	360	1,0	290	0,8	145	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044
N.2.2	360	1,0	290	0,8	145	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044
N.2.3	240	1,0	190	0,8	95	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044
N.3.1	240	1,0	190	0,8	95	0,6	0,015	0,013	0,010	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033
N.3.2	240	1,0	190	0,8	95	0,6	0,015	0,013	0,010	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033
N.3.3	170	1,0	135	0,8	70	0,6	0,015	0,013	0,010	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033
N.4.1	220	1,0	175	0,8	90	0,6	0,023	0,020	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044

Cutting data standard values – AluLine – End mill – ZEFP = 4

Index	Type short / medium length		Type long		Type extra long		53 700..., 53 701..., 53 702..., 53 703..., 53 704..., 53 705..., 53 706..., 53 707..., 53 560..., 53 561..., 53 562..., 53 563..., 53 564..., 53 565..., 53 566..., 53 567..., 53 568..., 53 569...													
							Ø DC (mm) =															
							2			3,0			4,0			5,0			6,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)															
N.1.1	600	1,0	480	0,8	240	0,6	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039
N.1.2	600	1,0	480	0,8	240	0,6	0,018	0,016	0,012	0,029	0,025	0,019	0,038	0,033	0,025	0,048	0,042	0,032	0,058	0,050	0,039
N.2.1	360	1,0	290	0,8	145	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035
N.2.2	480	1,0	385	0,8	145	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035
N.2.3	240	1,0	190	0,8	95	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035
N.3.1	240	1,0	190	0,8	95	0,6	0,014	0,012	0,009	0,021	0,018	0,014	0,029	0,025	0,019	0,037	0,032	0,025	0,045	0,039	0,030
N.3.2	240	1,0	190	0,8	95	0,6	0,014	0,012	0,009	0,021	0,018	0,014	0,029	0,025	0,019	0,037	0,032	0,025	0,045	0,039	0,030
N.3.3	170	1,0	135	0,8	70	0,6	0,014	0,012	0,009	0,021	0,018	0,014	0,029	0,025	0,019	0,037	0,032	0,025	0,045	0,039	0,030
N.4.1	220	1,0	175	0,8	90	0,6	0,020	0,017	0,013	0,028	0,024	0,019	0,036	0,031	0,024	0,045	0,039	0,030	0,053	0,046	0,035

53 623..., 53 624..., 53 625..., 53 626..., 53 633..., 53 634..., 53 635..., 53 636..., 53 619..., 53 620..., 53 621..., 53 622..., 53 629..., 53 630..., 53 631..., 53 632..., 52 627..., 53 628..., 53 637..., 53 638...

● 1st choice
○ suitable

Index	Ø DC (mm) = 8,5–10,0			10,5–12,0			12,5–14,0			14,5–16,0			16,5–18,0			18,5–20,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																				
N.1.1	0,137	0,118	0,091	0,162	0,140	0,108	0,189	0,164	0,126	0,203	0,176	0,135	0,216	0,187	0,144	0,230	0,199	0,153	●	○*	○
N.1.2	0,137	0,118	0,091	0,162	0,140	0,108	0,189	0,164	0,126	0,203	0,176	0,135	0,216	0,187	0,144	0,230	0,199	0,153	●	○*	○
N.2.1	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.2.2	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.2.3	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.3.1	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.3.2	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.3.3	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.4.1	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○

* = only suitable for DLC-coated cutters

53 598..., 53 599..., 53 578..., 53 579..., 53 580.../ 53 581..., 53 517..., 53 518..., 53 519..., 53 520..., 53 521..., 53 522..., 53 523..., 53 524...

● 1st choice
○ suitable

Index	Ø DC (mm) = 6,5–8,0			8,5–10,0			10,5–12,0			12,5–14,0			14,5–16,0			16,5–18,0			18,5–20,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																							
N.1.1	0,095	0,082	0,063	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.1.2	0,095	0,082	0,063	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,194	0,168	0,129	0,206	0,178	0,137	●	○*	○
N.2.1	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○
N.2.2	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○
N.2.3	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○
N.3.1	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,134	0,116	0,089	0,141	0,122	0,094	●	○*	○
N.3.2	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,134	0,116	0,089	0,141	0,122	0,094	●	○*	○
N.3.3	0,066	0,057	0,044	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,134	0,116	0,089	0,141	0,122	0,094	●	○*	○
N.4.1	0,087	0,075	0,058	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,174	0,151	0,116	0,186	0,161	0,124	●	○*	○

* = only suitable for DLC-coated cutters

53 700..., 53 701..., 53 702..., 53 703..., 53 704..., 53 705..., 53 706..., 53 707..., 53 560..., 53 561..., 53 562..., 53 563..., 53 564..., 53 565..., 53 566..., 53 567..., 53 568..., 53 569...

● 1st choice
○ suitable

Index	Ø DC (mm) = 8,0			8,5–10,0			12,0			14,0			16,0			18,0			20,0			Emulsion	Compressed air	MMS
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			
	f_z (mm)																							
N.1.1	0,078	0,068	0,052	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.1.2	0,078	0,068	0,052	0,098	0,085	0,065	0,119	0,103	0,079	0,138	0,120	0,092	0,149	0,129	0,099	0,158	0,137	0,105	0,168	0,146	0,112	●	○*	○
N.2.1	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○
N.2.2	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○
N.2.3	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○
N.3.1	0,060	0,052	0,040	0,075	0,065	0,050	0,090	0,078	0,060	0,105	0,091	0,070	0,113	0,098	0,075	0,120	0,104	0,080	0,128	0,111	0,085	●	○*	○
N.3.2	0,060	0,052	0,040	0,075	0,065	0,050	0,090	0,078	0,060	0,105	0,091	0,070	0,113	0,098	0,075	0,120	0,104	0,080	0,128	0,111	0,085	●	○*	○
N.3.3	0,060	0,052	0,040	0,075	0,065	0,050	0,090	0,078	0,060	0,105	0,091	0,070	0,113	0,098	0,075	0,120	0,104	0,080	0,128	0,111	0,085	●	○*	○
N.4.1	0,071	0,061	0,047	0,087	0,075	0,058	0,105	0,091	0,070	0,122	0,105	0,081	0,130	0,112	0,087	0,138	0,120	0,092	0,147	0,127	0,098	●	○*	○

* = only suitable for DLC-coated cutters

Cutting data standard values – AluLine – Roughing-finishing milling cutter

Index	Type short / long		Medium-length version		53 582 ..., 53 583 ...															
					Ø DC (mm) =															
					3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
					f_z (mm)															
N.1.1	600	1,0	480	0,8	0,114	0,099	0,076	0,131	0,113	0,087	0,147	0,127	0,098	0,162	0,140	0,108	0,195	0,169	0,130
N.1.2	600	1,0	480	0,8	0,114	0,099	0,076	0,131	0,113	0,087	0,147	0,127	0,098	0,162	0,140	0,108	0,195	0,169	0,130
N.2.1	360	1,0	290	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108
N.2.2	360	1,0	290	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108
N.2.3	240	1,0	190	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108
N.3.1	240	1,0	190	0,8	0,049	0,042	0,033	0,065	0,056	0,043	0,081	0,070	0,054	0,098	0,085	0,065	0,129	0,112	0,086
N.3.2	240	1,0	190	0,8	0,049	0,042	0,033	0,065	0,056	0,043	0,081	0,070	0,054	0,098	0,085	0,065	0,129	0,112	0,086
N.3.3	170	1,0	135	0,8	0,049	0,042	0,033	0,065	0,056	0,043	0,081	0,070	0,054	0,098	0,085	0,065	0,129	0,112	0,086
N.4.1	220	1,0	175	0,8	0,082	0,071	0,055	0,098	0,085	0,065	0,113	0,098	0,075	0,129	0,112	0,086	0,162	0,140	0,108

Cutting data – AluLine – Ball Nosed End Mills

Index	Type short		Type long		Type extra long		53 607 ..., 53 608 ..., 53 609 ..., 53 610 ...														
							Ø DC (mm) =														
							3			4			5			6			8		
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
							f_z (mm)														
N.1.1	750	0,03	450	0,02	225	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.1.2	750	0,03	450	0,02	225	0,015	0,035	0,030	0,023	0,047	0,040	0,031	0,059	0,051	0,039	0,071	0,061	0,047	0,095	0,082	0,063
N.2.1	600	0,03	360	0,02	180	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
N.2.2	600	0,03	360	0,02	180	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
N.2.3	400	0,03	240	0,02	120	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
N.3.1	180	0,03	110	0,02	55	0,015	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044
N.3.2	180	0,03	110	0,02	55	0,015	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044
N.3.3	230	0,03	140	0,02	70	0,015	0,024	0,021	0,016	0,032	0,028	0,022	0,041	0,035	0,027	0,050	0,043	0,033	0,066	0,057	0,044
N.4.1	350	0,03	210	0,02	105	0,015	0,033	0,029	0,022	0,044	0,038	0,029	0,054	0,047	0,036	0,066	0,057	0,044	0,087	0,075	0,058
O.1.1	65	0,03	40	0,03	40	0,03				0,135	0,104	0,075	0,200	0,149	0,100	0,240	0,179	0,120	0,300	0,224	0,150
O.1.2	240	0,03	145	0,03	145	0,03				0,135	0,104	0,075	0,200	0,149	0,100	0,240	0,179	0,120	0,300	0,224	0,150

Cutting data – AluLine – High Accuracy Finishing Cutters

Index	Type short	Type long	Type extra long	$a_{p\,max.}$ x DC	53 639 ...															
					Ø DC (mm) =															
					6			8			10			12			16			
	v_c (m/min)				a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC
					f_z (mm)															
N.1.1	500	400	300	2,0	0,036	0,031	0,024	0,047	0,040	0,031	0,056	0,049	0,038	0,067	0,058	0,045	0,083	0,072	0,055
N.1.2	500	400	300	2,0	0,036	0,031	0,024	0,047	0,040	0,031	0,056	0,049	0,038	0,067	0,058	0,045	0,083	0,072	0,055
N.2.1	300	240	180	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.2.2	300	240	180	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.2.3	210	170	125	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.3.1	210	170	125	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.3.2	210	170	125	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.3.3	150	120	90	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045
N.4.1	200	160	120	2,0	0,027	0,023	0,018	0,036	0,031	0,024	0,045	0,039	0,030	0,054	0,047	0,036	0,068	0,059	0,045

Index	53 582 ..., 53 583 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
N.1.1	0,225	0,195	0,150	0,258	0,224	0,172	0,305	0,264	0,203	0,336	0,291	0,224	●		
N.1.2	0,225	0,195	0,150	0,258	0,224	0,172	0,305	0,264	0,203	0,336	0,291	0,224	●		
N.2.1	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		
N.2.2	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		
N.2.3	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		
N.3.1	0,161	0,139	0,107	0,194	0,168	0,129	0,240	0,208	0,160	0,272	0,235	0,181	●		
N.3.2	0,161	0,139	0,107	0,194	0,168	0,129	0,240	0,208	0,160	0,272	0,235	0,181	●		
N.3.3	0,161	0,139	0,107	0,194	0,168	0,129	0,240	0,208	0,160	0,272	0,235	0,181	●		
N.4.1	0,194	0,168	0,129	0,225	0,195	0,150	0,273	0,237	0,182	0,305	0,264	0,203	●		

Index	53 607 ..., 53 608 ..., 53 609 ..., 53 610 ...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	10			12			14			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)																	
N.1.1	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,206	0,178	0,137	●	○	
N.1.2	0,120	0,104	0,080	0,144	0,125	0,096	0,168	0,146	0,112	0,180	0,156	0,120	0,206	0,178	0,137	●	○	
N.2.1	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
N.2.2	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
N.2.3	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
N.3.1	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,141	0,122	0,094	●	○	
N.3.2	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,141	0,122	0,094	●	○	
N.3.3	0,083	0,072	0,055	0,099	0,086	0,066	0,117	0,101	0,078	0,125	0,108	0,083	0,141	0,122	0,094	●	○	
N.4.1	0,110	0,095	0,073	0,132	0,114	0,088	0,153	0,133	0,102	0,164	0,142	0,109	0,186	0,161	0,124	●	○	
O.1.1	0,400	0,298	0,200	0,500	0,373	0,250	0,548	0,424	0,300	0,592	0,452	0,350	0,712	0,581	0,450	●	○	
O.1.2	0,400	0,298	0,200	0,500	0,373	0,250	0,548	0,424	0,300	0,592	0,452	0,350	0,712	0,581	0,450	●	○	

Index	53 639 ...			● 1st choice ○ suitable		
	Ø DC (mm) =					
	10					
	a_e < 0,02 x DC	a_e 0,02–0,04 x DC	a_e 0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)					
N.1.1	0,092	0,080	0,062	●		○
N.1.2	0,092	0,080	0,062	●		○
N.2.1	0,077	0,066	0,051	●		○
N.2.2	0,077	0,066	0,051	●		○
N.2.3	0,077	0,066	0,051	●		○
N.3.1	0,077	0,066	0,051	●		○
N.3.2	0,077	0,066	0,051	●		○
N.3.3	0,077	0,066	0,051	●		○
N.4.1	0,077	0,066	0,051	●		○

Cutting data – Cutters for plastic machining

Index	Strength N/mm² – HB	50 983 ..., 50 984 ..., 50 985 ..., 50 986 ..., 50 932 ...	50 937 ...	50 936 ...	50 938 ...	50 610 ..., 50 611 ..., 52 76. ...	50 91. ...	50 946 ...	50 948 ...	50 947 ...
		v_c (m/min)								
N.1.1	60 HB					400–450	400–450			
N.1.2	340 N/mm² / 100 HB					400–450	400–450			
N.2.1	250 N/mm² / 75 HB					350–400	350–400			
N.2.2	300 N/mm² / 90 HB				300–400			300–400	300–400	300–400
N.2.3	440 N/mm² / 130 HB				300–400			250–300	250–300	250–300
N.3.1	375 N/mm² / 110 HB					350–400	350–400			
N.3.2	300 N/mm² / 90 HB					400–450	400–450			
N.3.3	340 N/mm² / 100 HB					400–450	400–450			
N.4.1	70 HB				250			250	250	250
O.1.1	≤ 150 N/mm²					500–550	500–550			
O.1.2	≤ 100 N/mm²					500–550	500–550			
O.2.1	≤ 1000 N/mm²	150–200	150–200	500–600	150–200					
O.2.2	≤ 1000 N/mm²	150–200	150–200	500–600	150–200					
O.3.1		300–400	500–600	500–600	300–400					

DC in mm	Plastics, Thermoset, Hardwood, Pressed Cardboard					Plastic, Thermoplast, Polycarbonate, Non-ferrous metal, Hard rubber				
	End milling cutter Type W			Ball nosed cutter Type W		End milling cutter Type W			Ball nosed cutter Type W	
	Shoulder milling, trimming		Slot milling	Copy milling - Line milling		Shoulder milling, trimming		Slot milling	Copy milling - Line milling	
	Roughing	Finishing		Roughing	Finishing	Roughing	Finishing		Roughing	Finishing
	a_p = 1,0 x DC	a_p = 1,0 x DC		a_e = 0,5 x DC	a_e = 0,03 x DC	a_e = 1,5 x DC	a_p = 1,0 x DC		a_e = 0,5 x DC	a_e = 0,03 x DC
	a_e = 0,4 x DC	a_e = 0,1 x DC		a_e = 0,5 x DC	a_e = 0,02 x DC	a_e = 0,8 x DC	a_e = 0,1 x DC		a_e = 0,5 x DC	a_e = 0,02 x DC
	f_z (mm)									
2	0,024	0,018	0,016	0,028	0,024	0,024	0,022	0,017	0,037	0,030
3	0,036	0,027	0,024	0,042	0,036	0,036	0,033	0,026	0,056	0,045
4	0,048	0,036	0,032	0,056	0,048	0,048	0,044	0,034	0,074	0,060
5	0,060	0,045	0,040	0,070	0,060	0,060	0,055	0,043	0,093	0,075
6	0,072	0,054	0,048	0,084	0,072	0,072	0,066	0,051	0,111	0,090
8	0,100	0,070	0,060	0,110	0,100	0,100	0,090	0,070	0,150	0,120
10	0,120	0,090	0,080	0,140	0,120	0,120	0,110	0,090	0,190	0,150
12	0,140	0,110	0,100	0,170	0,140	0,140	0,130	0,100	0,220	0,180
14	0,170	0,130	0,110	0,200	0,170	0,170	0,150	0,120	0,260	0,210
16	0,190	0,140	0,130	0,220	0,190	0,190	0,180	0,140	0,300	0,240
18	0,220	0,160	0,140	0,250	0,220	0,220	0,200	0,150	0,330	0,270
20	0,240	0,180	0,160	0,280	0,240	0,240	0,220	0,170	0,370	0,300

DC in mm	Fiber reinforced plastics AFK, CFK, GFK			
	End mill staggered teeth			
	Shoulder milling, trimming		Slot milling	
	a_p = 1,0 x DC		a_p = 0,35 x DC	
	a_e = 0,4 x DC			
	fine	medium	fine	medium
	f (mm/rev)			
2	0,16	0,14	0,14	0,12
3	0,24	0,21	0,21	0,18
4	0,32	0,28	0,28	0,24
5	0,40	0,35	0,35	0,30
6	0,48	0,42	0,42	0,36
8	0,64	0,56	0,56	0,48
10	0,80	0,70	0,70	0,60
12	0,96	0,84	0,84	0,72
16	1,28	1,12	1,12	0,96
20	1,60	1,40	1,40	1,20

Feedrate values for ball nosed and torus cutters on → **page 486**

Cutting data standard values – AluLine – NC deburring cutter

Index	v_c (m/min)	53 660 ..., 53 661 ..., 53 662 ..., 53 663 ... DLC Ø DC (mm) = 4	6	8	10	12	16	v_c (m/min)	53 664 ..., 53 665 ..., 53 666 ..., 53 667 ... uncoated Ø DC (mm) = 4	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)							f_z (mm)								
N.1.1	300	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.1.2	300	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.2.1	260	0,03	0,04	0,05	0,06	0,07	0,08	170	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.2.2	280	0,03	0,04	0,05	0,06	0,07	0,08	180	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.2.3	250	0,03	0,04	0,05	0,06	0,07	0,08	165	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.3.1	110	0,03	0,04	0,05	0,06	0,07	0,08	75	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.3.2	140	0,03	0,04	0,05	0,06	0,07	0,08	90	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.3.3	120	0,03	0,04	0,05	0,06	0,07	0,08	80	0,02	0,03	0,04	0,05	0,06	0,07	●	○*	○
N.4.1																	
O.1.1	320	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○	○
O.1.2	320	0,03	0,04	0,05	0,06	0,07	0,08	195	0,02	0,03	0,04	0,05	0,06	0,07	●	○	○
O.2.1																	
O.2.2																	
O.3.1																	

* = only suitable for DLC-coated cutters

Cutting data standard values – BlueLine – NC deburring cutter

Index	v_c (m/min)	52 560 ..., 52 561 ..., 52 562 ..., 52 563 ... Ti2000 Ø DC (mm) = 4	6	8	10	12	16	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)								
P.3.2	80	0,02	0,02	0,025	0,03	0,04	0,05		●	
P.3.3	70	0,02	0,02	0,025	0,03	0,04	0,05		●	
H.1.1	120	0,045	0,055	0,06	0,065	0,065	0,07		●	
H.1.2	90	0,04	0,05	0,055	0,06	0,06	0,065		●	
H.1.3	70	0,035	0,045	0,05	0,055	0,055	0,06		●	
H.1.4	50	0,025	0,03	0,04	0,045	0,045	0,05		●	
H.2.1										
H.3.1										

14

Cutting data standard values – BlueLine – Micro-end mill / micro-torus cutter

Index	$T_X \leq 2,5$ x DC		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	190	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,018	0,0195	0,0210	0,0225	0,0240	●
P.3.3	190	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,018	0,0195	0,0210	0,0225	0,0240	●
H.1.1	120	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,018	0,0195	0,0210	0,0225	0,0240	●
H.1.2	70	0,5	0,0030	0,0360	0,0045	0,0062	0,0074	0,0104	0,0132	0,0144	0,0156	0,0168	0,0180	0,0192	●
H.1.3	50	0,5	0,0025	0,0030	0,0040	0,0052	0,0062	0,0087	0,0110	0,0120	0,0130	0,0140	0,0150	0,0160	●
H.1.4															
H.2.1	190	0,5	0,0038	0,0045	0,0050	0,0078	0,0093	0,0131	0,0165	0,0180	0,0195	0,0210	0,0225	0,0240	●
H.3.1	70	0,5	0,0030	0,0360	0,0045	0,0062	0,0074	0,0104	0,0132	0,0144	0,0156	0,0168	0,0180	0,0192	●

Index	$T_X \leq 2,6–5,0$ x DC		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	170	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
P.3.3	170	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
H.1.1	108	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
H.1.2	63	0,5	0,0030	0,0032	0,0036	0,0050	0,0060	0,0082	0,0107	0,0121	0,0126	0,0140	0,0156	0,0156	●
H.1.3	45	0,5	0,0025	0,0027	0,0030	0,0042	0,0050	0,0068	0,0089	0,0101	0,0105	0,0117	0,0130	0,0130	●
H.1.4															
H.2.1	170	0,5	0,0038	0,0041	0,0045	0,0063	0,0075	0,0102	0,0134	0,0152	0,0158	0,0176	0,0195	0,0195	●
H.3.1	63	0,5	0,0030	0,0032	0,0036	0,0050	0,0060	0,0082	0,0107	0,0121	0,0126	0,0140	0,0156	0,0156	●

Index	$T_X \leq 5,1–10,0$ x DC		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	150	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,012	0,0128	●
P.3.3	150	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,012	0,0128	●
H.1.1	96	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128	●
H.1.2	56	0,5	0,0024	0,0030	0,0036	0,0048	0,0054	0,0060	0,0066	0,0072	0,0084	0,0090	0,0096	0,0102	●
H.1.3	40	0,5	0,0020	0,0025	0,0030	0,0040	0,0045	0,0050	0,0055	0,0060	0,0070	0,0075	0,0080	0,0085	●
H.1.4															
H.2.1	150	0,5	0,0030	0,0038	0,0045	0,0060	0,0068	0,0075	0,0083	0,0090	0,0105	0,0113	0,0120	0,0128	●
H.3.1	56	0,5	0,0024	0,0030	0,0036	0,0048	0,0054	0,0060	0,0066	0,0072	0,0084	0,0090	0,0096	0,0102	●

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	114	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
P.3.3	114	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
H.1.1	72	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
H.1.2	42	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	0,0053	●
H.1.3	30	0,5	0,0010	0,0015	0,0020	0,0025	0,0030	0,0032	0,0034	0,0036	0,0038	0,0040	0,0042	0,0044	●
H.1.4															
H.2.1	114	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	0,0066	●
H.3.1	42	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	0,0053	●

Index	$T_x \leq 15{,}1–20{,}0 \times DC$		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	75	0,5	0,0015	0,0015	0,0023	0,003	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
P.3.3	75	0,5	0,0015	0,0015	0,0023	0,003	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
H.1.1	48	0,5	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
H.1.2	28	0,5	0,0012	0,0012	0,0018	0,0024	0,003	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	●
H.1.3	20	0,5	0,0010	0,0010	0,0015	0,0020	0,0025	0,0030	0,0032	0,0034	0,0036	0,0038	0,0040	0,0042	●
H.1.4															
H.2.1	75	0,5	0,0015	0,0015	0,0023	0,0030	0,0038	0,0045	0,0048	0,0051	0,0054	0,0057	0,0060	0,0063	●
H.3.1	28	0,5	0,0012	0,0012	0,0018	0,0024	0,0030	0,0036	0,0038	0,0041	0,0043	0,0046	0,0048	0,0050	●

Index	$T_x \leq 20{,}1–30{,}0 \times DC$		52 345 ..., 52 346 ..., 52 347 ..., 52 349 ..., 52 350 ..., 52 351 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	57	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
P.3.3	57	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
H.1.1	36	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
H.1.2	21	0,5	0,0010	0,001	0,0020	0,0020	0,0020	0,0030	0,0030	0,0030	0,0030	0,004	0,0040	0,0040	●
H.1.3	15	0,5	0,0008	0,001	0,0013	0,0017	0,0019	0,0022	0,0025	0,0027	0,0029	0,003	0,0031	0,0032	●
H.1.4															
H.2.1	57	0,5	0,0010	0,002	0,0020	0,0030	0,0030	0,0030	0,0040	0,0040	0,0040	0,005	0,0050	0,0050	●
H.3.1	21	0,5	0,0010	0,001	0,0020	0,0020	0,0020	0,0030	0,0030	0,0030	0,0030	0,004	0,0040	0,0040	●

Cutting data standard values – BlueLine – Micro-ball-nosed end mill

Index	$T_X \leq 2,5 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											Compressed air
P.3.2	190	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
P.3.3	190	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
H.1.1	120	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
H.1.2	70	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0042	0,0048	0,0050	0,0053	0,0055	0,0058	0,0060	●
H.1.3	50	0,5	0,0010	0,0015	0,0020	0,0025	0,0030	0,0035	0,0040	0,0042	0,0044	0,0046	0,0048	0,0050	●
H.1.4															
H.2.1	190	0,5	0,0015	0,0023	0,0030	0,0038	0,0045	0,0053	0,0060	0,0063	0,0066	0,0069	0,0072	0,0075	●
H.3.1	70	0,5	0,0012	0,0018	0,0024	0,0030	0,0036	0,0042	0,0048	0,0050	0,0053	0,0055	0,0058	0,0060	●

Index	$T_X \leq 2,6–5,0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											Compressed air
P.3.2	170	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
P.3.3	170	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
H.1.1	108	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
H.1.2	63	0,5	0,0008	0,0011	0,0014	0,0018	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032	0,0038	●
H.1.3	45	0,5	0,0007	0,0009	0,0012	0,0015	0,0017	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032	●
H.1.4															
H.2.1	170	0,5	0,0011	0,0014	0,0018	0,0023	0,0026	0,0029	0,0032	0,0035	0,0038	0,0041	0,0044	0,0048	●
H.3.1	63	0,5	0,0008	0,0011	0,0014	0,0018	0,0019	0,0021	0,0023	0,0025	0,0027	0,0029	0,0032	0,0038	●

Index	$T_X \leq 5,1–10,0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											Compressed air
P.3.2	150	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039	●
P.3.3	150	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039	●
H.1.1	96	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	0,0036	0,0039	●
H.1.2	56	0,5	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0024	0,0026	0,0029	0,0031	●
H.1.3	40	0,5	0,0004	0,0006	0,0008	0,0010	0,0012	0,0014	0,0016	0,0018	0,0020	0,0022	0,0024	0,0026	●
H.1.4															
H.2.1	150	0,5	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	0,0039	●
H.3.1	56	0,5	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0024	0,0026	0,0029	0,0031	●

Index	$T_x \leq 10{,}1–15{,}0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	114	0,5	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
P.3.3	114	0,5	0,0003	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
H.1.1	72	0,5	0,0003	0,0006	0,0008	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
H.1.2	42	0,5	0,0002	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0022	0,0026	0,0029	●
H.1.3	30	0,5	0,0002	0,0004	0,0006	0,0008	0,0010	0,0012	0,0014	0,0016	0,0018	0,0020	0,0022	0,0024	●
H.1.4															
H.2.1	114	0,5	0,0003	0,0006	0,0008	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,0030	0,0033	0,0036	●
H.3.1	42	0,5	0,0002	0,0005	0,0007	0,0010	0,0012	0,0014	0,0017	0,0019	0,0022	0,0022	0,0026	0,0029	●

Index	$T_x \leq 15{,}1–20{,}0 \times DC$		52 356 ..., 52 357 ..., 52 358 ..., 52 359 ..., 52 360 ...											Compressed air
			Ø DC (mm) =											
			0,2	0,3	0,4–0,5	0,6–0,7	0,8–0,9	1,0	1,2–1,4	1,5	1,6–1,8	2,0	2,5	3,0	
			a_e 0,05 x DC											
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)											
P.3.2	114	0,5	0,0002	0,0004	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
P.3.3	114	0,5	0,0002	0,0004	0,0006	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
H.1.1	72	0,5	0,0002	0,0004	0,0005	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
H.1.2	42	0,5	0,0001	0,0003	0,0004	0,0007	0,0009	0,0011	0,0014	0,0016	0,0019	0,0019	0,0023	0,0026	●
H.1.3	30	0,5	0,0001	0,0002	0,0003	0,0005	0,0007	0,0009	0,0011	0,0013	0,0015	0,0017	0,0019	0,0021	●
H.1.4															
H.2.1	114	0,5	0,0002	0,0004	0,0005	0,0009	0,0012	0,0015	0,0018	0,0021	0,0024	0,0027	0,003	0,0033	●
H.3.1	42	0,5	0,0001	0,0003	0,0004	0,0007	0,0009	0,0011	0,0014	0,0016	0,0019	0,0021	0,0023	0,0026	●

Cutting data standard values – BlueLine – End mill

Index	v_c (m/min) 52 140 ... 52 141 ...	v_c (m/min) 52 133 ... 52 134 ... 52 324 ...	$a_{p\,max.}$ x DC	52 133 ..., 52 134 ..., 52 140 ..., 52 141 ..., 52 324 ... Ø DC (mm) = 3	4	5	6	8	10	12	16	20	Compressed air
				a_e 0,05 x DC									
				f_z (mm)									
P.3.2	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
P.3.3	190	160	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.1.1	160	140	1,0	0,013	0,013	0,016	0,018	0,020	0,023	0,025	0,029	0,032	●
H.1.2	**140**	**130**	1,0	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●
H.1.3	**100**	**90**	1,0	0,010	0,010	0,012	0,014	0,016	0,018	0,020	0,023	0,025	●
H.1.4													
H.2.1	**190**	**160**	1,0	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.3.1	**140**	**130**	1,0	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●

Index	v_c (m/min)	$a_{p\,max.}$ x DC	52 135 ..., 52 136 ..., 52 325 ... Ø DC (mm) = 3	4	5	6	8	10	12	16	20	Compressed air
			a_e 0,05 x DC									
			f_z (mm)									
P.3.2	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
P.3.3	140	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.1.1	125	1,0	0,008	0,009	0,011	0,014	0,016	0,02	0,023	0,026	0,028	●
H.1.2	**115**	1,0	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●
H.1.3	**80**	1,0	0,005	0,006	0,007	0,01	0,012	0,015	0,017	0,019	0,02	●
H.1.4												
H.2.1	**140**	1,0	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.3.1	**115**	1,0	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●

Index	v_c (m/min)	$a_{p\,max.}$ x DC	52 344 ... Ø DC (mm) = 0,5			1,0–1,5			2,0–2,5			3,0–3,5			4,0			5,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
P.3.2	**120**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
P.3.3	**120**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
H.1.1	**80**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
H.1.2	**60**	0,5	0,004	0,004	0,003	0,006	0,005	0,004	0,009	0,007	0,005	0,013	0,010	0,007	0,017	0,013	0,010	0,022	0,016	0,011
H.1.3	**50**	0,5	0,004	0,003	0,002	0,005	0,004	0,003	0,007	0,006	0,004	0,011	0,008	0,006	0,014	0,011	0,008	0,018	0,013	0,009
H.1.4																				
H.2.1	**120**	0,5	0,006	0,004	0,004	0,008	0,006	0,005	0,011	0,008	0,006	0,016	0,012	0,009	0,022	0,017	0,012	0,027	0,020	0,014
H.3.1	**60**	0,5	0,004	0,004	0,003	0,006	0,005	0,004	0,009	0,007	0,005	0,013	0,010	0,007	0,017	0,013	0,010	0,022	0,016	0,011

Index	52 140 ... 52 141 ...	52 133 ... 52 134 ... 52 324 ...		52 133 ..., 52 134 ..., 52 140 ..., 52 141 ..., 52 324 ...									Compressed air
				Ø DC (mm) =									
				3	4	5	6	8	10	12	16	20	
				a_e 0,6–1,0 x DC									
	v_c (m/min)		$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
P.3.3	190	160	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.1.1	160	140	0,05	0,013	0,013	0,016	0,018	0,020	0,023	0,025	0,029	0,032	●
H.1.2	**140**	**130**	0,05	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●
H.1.3	**100**	**90**	0,05	0,010	0,010	0,012	0,014	0,016	0,018	0,020	0,023	0,025	●
H.1.4													
H.2.1	**190**	**160**	0,05	0,018	0,020	0,022	0,024	0,025	0,030	0,035	0,038	0,040	●
H.3.1	**140**	**130**	0,05	0,011	0,011	0,014	0,016	0,018	0,020	0,022	0,025	0,027	●

Index		52 135 ..., 52 136 ..., 52 325 ...									Compressed air
		Ø DC (mm) =									
		3	4	5	6	8	10	12	16	20	
		a_e 0,6–1,0 x DC									
	v_c (m/min) $a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	140 0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
P.3.3	140 0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.1.1	125 0,05	0,008	0,009	0,011	0,014	0,016	0,02	0,023	0,026	0,028	●
H.1.2	**115** 0,05	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●
H.1.3	**80** 0,05	0,005	0,006	0,007	0,01	0,012	0,015	0,017	0,019	0,02	●
H.1.4											
H.2.1	**140** 0,05	0,011	0,013	0,015	0,019	0,022	0,027	0,032	0,034	0,035	●
H.3.1	**115** 0,05	0,007	0,008	0,009	0,012	0,014	0,017	0,02	0,023	0,025	●

Index	52 344 ...																		Compressed air
	Ø DC (mm) =																		
	6,0			8,0			10,0			12,0			16,0			20,0			
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	
	f_z (mm)																		
P.3.2	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,06	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
P.3.3	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,06	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
H.1.1	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,06	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
H.1.2	0,029	0,021	0,014	0,038	0,029	0,019	0,043	0,032	0,022	0,048	0,036	0,024	0,061	0,046	0,036	0,076	0,062	0,048	●
H.1.3	0,024	0,018	0,012	0,032	0,024	0,016	0,036	0,027	0,018	0,040	0,030	0,020	0,051	0,039	0,030	0,063	0,052	0,040	●
H.1.4																			
H.2.1	0,036	0,027	0,018	0,048	0,036	0,024	0,054	0,040	0,027	0,060	0,045	0,030	0,076	0,058	0,045	0,095	0,077	0,060	●
H.3.1	0,029	0,021	0,014	0,038	0,029	0,019	0,043	0,032	0,022	0,048	0,036	0,024	0,061	0,046	0,036	0,076	0,062	0,048	●

14

Cutting data standard values – BlueLine – End mill

Index	v_c (m/min)	$a_{p\,max.}$ x DC	52 348 ... Ø DC (mm) = 6		8		10		12		16		20		Compressed air
			a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,05 x DC	a_e 0,1 x DC	
			f_z (mm)												
P.3.2	120	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
P.3.3	120	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
H.1.1	100	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
H.1.2	90	2,0	0,021	0,017	0,024	0,019	0,027	0,022	0,030	0,025	0,035	0,030	0,041	0,036	●
H.1.3	60	2,0	0,014	0,011	0,016	0,013	0,018	0,015	0,021	0,018	0,025	0,022	0,030	0,027	●
H.1.4															
H.2.1	120	2,0	0,025	0,021	0,029	0,024	0,031	0,027	0,036	0,032	0,042	0,038	0,049	0,045	●
H.3.1	90	2,0	0,021	0,017	0,024	0,019	0,027	0,022	0,030	0,025	0,035	0,030	0,041	0,036	●

Index	 v_c (m/min)	$a_{p\,max.}$ x DC	52 353 ... Ø DC (mm) = 1	2	3	4	5	6	8	10	12	16	Compressed air
			a_e 0,05 x DC										
			f_z (mm)										
P.3.2	200	0,5	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
P.3.3	200	0,5	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.1.1	170	0,5	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.1.2	150	0,5	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●
H.1.3	110	0,5	0,005	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4													
H.2.1	200	0,5	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.3.1	150	0,5	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●

Index	 v_c (m/min)	$a_{p\,max.}$ x DC	52 354 ... Ø DC (mm) = 1	2	3	4	5	6	8	10	12	16	Compressed air
			a_e 0,05 x DC										
			f_z (mm)										
P.3.2	200	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
P.3.3	200	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.1	170	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.2	150	0,5	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●
H.1.3	110	0,5	0,003	0,005	0,010	0,015	0,020	0,025	0,03	0,035	0,040	0,045	●
H.1.4													
H.2.1	200	0,5	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.3.1	150	0,5	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●

Index			52 353 ...										Compressed air
			Ø DC (mm) =										
			1	2	3	4	5	6	8	10	12	16	
			a_e 0,6–1,0 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.3.2	200	0,05	0,008	0,015	0,030	0,045	0,06	0,075	0,090	0,105	0,120	0,135	●
P.3.3	200	0,05	0,008	0,015	0,030	0,045	0,06	0,075	0,090	0,105	0,120	0,135	●
H.1.1	170	0,05	0,008	0,015	0,030	0,045	0,06	0,075	0,090	0,105	0,120	0,135	●
H.1.2	150	0,05	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●
H.1.3	110	0,05	0,005	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4													
H.2.1	200	0,05	0,008	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,135	●
H.3.1	150	0,05	0,006	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,108	●

Index			52 354 ...										Compressed air
			Ø DC (mm) =										
			1	2	3	4	5	6	8	10	12	16	
			a_e 0,6–1,0 x DC										
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)										
P.3.2	200	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
P.3.3	200	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.1	170	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.1.2	150	0,05	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●
H.1.3	110	0,05	0,003	0,005	0,010	0,015	0,020	0,025	0,030	0,035	0,040	0,045	●
H.1.4													
H.2.1	200	0,05	0,005	0,008	0,015	0,023	0,030	0,038	0,045	0,053	0,060	0,068	●
H.3.1	150	0,05	0,004	0,006	0,012	0,018	0,024	0,030	0,036	0,042	0,048	0,054	●

Cutting data standard values – BlueLine – Ball-nosed end mill

Index			52 258 ..., 52 259 ...									
			Ø DC (mm) =									
			0,1–0,5	0,6–1,0	1,5–2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
P.3.3	190	0,05	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
H.1.1	165	0,05	0,004	0,005	0,006	0,008	0,010	0,014	0,017	0,028	0,038	0,048
H.1.2	**145**	**0,05**	0,004	0,004	0,005	0,006	0,008	0,012	0,015	0,025	0,035	0,045
H.1.3	**105**	**0,05**	0,003	0,004	0,005	0,005	0,006	0,010	0,014	0,022	0,030	0,040
H.1.4												
H.2.1	**190**	**0,05**	0,008	0,010	0,012	0,016	0,020	0,025	0,030	0,040	0,050	0,060
H.3.1	**145**	**0,05**	0,004	0,004	0,005	0,006	0,008	0,012	0,015	0,025	0,035	0,045

Index			52 256 ..., 52 257 ..., 52 302 ..., 52 303 ..., 52 404 ..., 52 405 ...									
			Ø DC (mm) =									
			0,1–0,5	0,6–1,0	1,1–1,5	1,6–2,0	2,5	3,0	4,0	5,0	6,0	7,0
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	200	0,05	0,010	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040	0,040
P.3.3	200	0,05	0,010	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040	0,040
H.1.1	170	0,05	0,005	0,006	0,006	0,008	0,011	0,015	0,020	0,024	0,027	0,035
H.1.2	**150**	0,05	0,005	0,006	0,006	0,008	0,010	0,013	0,018	0,022	0,025	0,032
H.1.3	**110**	0,05	0,004	0,005	0,005	0,007	0,009	0,013	0,016	0,021	0,025	0,030
H.1.4												
H.2.1	**200**	0,05	0,010	0,012	0,015	0,019	0,025	0,030	0,033	0,036	0,040	0,040
H.3.1	**150**	0,05	0,005	0,006	0,006	0,008	0,010	0,013	0,018	0,022	0,025	0,032

Index			52 355 ...											Compressed air
			Ø DC (mm) =											
			0,6–0,8	1,0	1,2–1,5	2,0	2,0	3,0	4,0	5,0	6,0	8,0	10,0	12,0	
			a_e 0,05 x DC												
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)												
P.3.2	**200**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,120	●
P.3.3	**200**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,120	●
H.1.1	**170**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,105	●
H.1.2	**150**	0,05	0,004	0,006	0,008	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,100	●
H.1.3	**110**	0,05	0,004	0,005	0,007	0,010	0,020	0,030	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4															
H.2.1	**200**	0,05	0,006	0,008	0,010	0,015	0,030	0,045	0,060	0,075	0,090	0,105	0,120	0,120	●
H.3.1	**150**	0,05	0,004	0,006	0,008	0,012	0,024	0,036	0,048	0,060	0,072	0,084	0,096	0,100	●

Index	52 258 ..., 52 259 ...			Compressed air
	Ø DC (mm) =			
	12,0	16,0	20,0	
	a_e 0,05 x DC			
	f_z (mm)			
P.3.2	0,070	0,090	0,10	●
P.3.3	0,070	0,090	0,10	●
H.1.1	0,058	0,078	0,09	●
H.1.2	0,055	0,075	0,08	●
H.1.3	0,050	0,070	0,07	●
H.1.4				
H.2.1	0,070	0,090	0,10	●
H.3.1	0,055	0,075	0,08	●

Index	52 258 ..., 52 259 ...							Compressed air
	Ø DC (mm) =							
	8,0	9,0	10,0	12,0	14,0	16,0	20,0	
	a_e 0,05 x DC							
	f_z (mm)							
P.3.2	0,050	0,06	0,07	0,08	0,09	0,100	0,120	●
P.3.3	0,050	0,06	0,07	0,08	0,09	0,100	0,120	●
H.1.1	0,042	0,048	0,058	0,068	0,078	0,088	0,105	●
H.1.2	0,039	0,045	0,055	0,065	0,075	0,085	0,100	●
H.1.3	0,035	0,040	0,050	0,060	0,070	0,080	0,090	●
H.1.4								
H.2.1	0,050	0,060	0,070	0,080	0,090	0,100	0,120	●
H.3.1	0,039	0,045	0,055	0,065	0,075	0,085	0,100	●

Cutting data standard values – BlueLine – Torus cutter

Index			52 304 ...									Compressed air
			Ø DC (mm) =									
			0,5–1,5	2,0–3,0	4,0	5,0	6,0	8,0	10,0	12,0	16,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120	●
P.3.3	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120	●
H.1.1	160	1,0	0,007	0,023	0,040	0,040	0,055	0,070	0,082	0,090	0,110	●
H.1.2	140	1,0	0,006	0,020	0,038	0,038	0,052	0,065	0,080	0,085	0,105	●
H.1.3	100	1,0	0,005	0,018	0,035	0,035	0,050	0,060	0,075	0,080	0,100	●
H.1.4												
H.2.1	190	1,0	0,012	0,028	0,055	0,055	0,065	0,075	0,090	0,100	0,120	●
H.3.1	140	1,0	0,006	0,020	0,038	0,038	0,052	0,065	0,080	0,085	0,105	●

Index			52 305 ...						Compressed air
			Ø DC (mm) =						
			1,0–1,5	2,0	3,0	4,0	5,30	6,0	
			a_e 0,05 x DC						
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						
P.3.2	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060	●
P.3.3	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060	●
H.1.1	160	1,0	0,005	0,020	0,020	0,035	0,035	0,050	●
H.1.2	140	1,0	0,004	0,017	0,017	0,033	0,033	0,053	●
H.1.3	100	1,0	0,003	0,015	0,015	0,030	0,030	0,005	●
H.1.4									
H.2.1	190	1,0	0,010	0,025	0,025	0,050	0,050	0,060	●
H.3.1	140	1,0	0,004	0,017	0,017	0,033	0,033	0,053	●

Index			52 361 ...									Compressed air
			Ø DC (mm) =									
			0,8–1,0	1,2–1,5	2,0	3,0	4,0	6,0	8,0	10,0	12,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	200	0,5	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
P.3.3	200	0,5	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.1	170	0,5	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.2	150	0,5	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●
H.1.3	110	0,5	0,005	0,007	0,010	0,020	0,030	0,050	0,060	0,070	0,080	●
H.1.4												
H.2.1	200	0,5	0,008	0,010	0,015	0,03	0,045	0,075	0,090	0,105	0,120	●
H.3.1	150	0,5	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●

Index			52 304 ...									Compressed air
			Ø DC (mm) =									
			0,5–1,5	2,0–3,0	4,0	5,0	6,0	8,0	10,0	12,0	16,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140	●
P.3.3	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140	●
H.1.1	160	0,05	0,011	0,028	0,050	0,050	0,070	0,080	0,090	0,100	0,130	●
H.1.2	140	0,05	0,010	0,025	0,044	0,044	0,070	0,075	0,088	0,085	0,125	●
H.1.3	100	0,05	0,009	0,021	0,040	0,040	0,065	0,070	0,085	0,080	0,120	●
H.1.4												
H.2.1	190	0,05	0,016	0,032	0,060	0,060	0,080	0,090	0,100	0,120	0,140	●
H.3.1	140	0,05	0,010	0,025	0,044	0,044	0,070	0,075	0,088	0,085	0,125	●

Index			52 305 ...						Compressed air
			Ø DC (mm) =						
			1,0–1,5	2,0	3,0	4,0	5,30	6,0	
			a_e 0,05 x DC						
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)						
P.3.2	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070	●
P.3.3	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070	●
H.1.1	160	0,05	0,009	0,025	0,025	0,045	0,045	0,060	●
H.1.2	140	0,05	0,008	0,022	0,022	0,040	0,040	0,058	●
H.1.3	100	0,05	0,007	0,018	0,018	0,035	0,035	0,050	●
H.1.4									
H.2.1	190	0,05	0,014	0,030	0,030	0,055	0,055	0,070	●
H.3.1	140	0,05	0,008	0,022	0,022	0,040	0,040	0,058	●

Index			52 361 ...									Compressed air
			Ø DC (mm) =									
			0,8–1,0	1,2–1,5	2,0	3,0	4,0	6,0	8,0	10,0	12,0	
			a_e 0,05 x DC									
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)									
P.3.2	200	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
P.3.3	200	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.1	170	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.1.2	150	0,05	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●
H.1.3	110	0,05	0,005	0,007	0,010	0,020	0,030	0,050	0,060	0,070	0,080	●
H.1.4												
H.2.1	200	0,05	0,008	0,010	0,015	0,030	0,045	0,075	0,090	0,105	0,120	●
H.3.1	150	0,05	0,006	0,008	0,012	0,024	0,036	0,060	0,072	0,084	0,096	●

Cutting data standard values – Micro cutter – 2.2xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																	
	Ø DC (mm) = 0,2–0,4						Ø DC (mm) = 0,5–0,7						Ø DC (mm) = 0,8–0,9					
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,02	0,02	0,02	0,01	0,01	$a_{p\,max.}$	0,1	0,1	0,1	0,1	0,05	$a_{p\,max.}$	0,2	0,2	0,2	0,2	0,12
	$n_{min.}$	30.000					$n_{min.}$	12.000					$n_{min.}$	8.000				
	n	v_f (mm/min)					n	v_f (mm/min)					n	v_f (mm/min)				
P.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.3	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.4	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.1.5	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.2.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.2.3	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.2.4	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.3.1	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.3.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.3.3	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.4.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.4.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.3.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.2.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.3.1	50.000	141	123	106	88	71	50.000	175	152	131	109	88	32.000	285	248	213	176	142
K.3.2	50.000	141	123	106	88	71	50.000	175	152	131	109	88	32.000	285	248	213	176	142
N.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	44.000	485	422	364	301	242
N.3.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.3.3	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.4.1	50.000	212	185	159	132	106	50.000	250	218	188	155	125	50.000	531	462	398	329	266
S.1.1	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.1.2	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.2.1	50.000	72	62	54	44	36	50.000	89	77	66	55	44	25.000	91	79	68	56	45
S.2.2	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.2.3	50.000	54	47	41	34	27	30000	66	57	49	41	33	12.000	78	68	59	49	39
S.3.1	50.000	114	99	85	71	57	50.000	164	143	123	102	82	44.000	114	99	85	71	57
S.3.2	50.000	114	99	85	71	57	50.000	164	143	123	102	82	44.000	164	143	123	102	82
S.3.3	50.000	70	61	53	43	35	50.000	85	74	64	53	42	38.000	101	88	76	63	51
H.1.1	50.000	219	191	164	136	110	50.000	232	202	174	144	116	50.000	388	338	291	241	194
H.1.2	50.000	201	175	151	125	101	50.000	285	248	213	176	142	38.000	336	292	252	208	168
H.1.3	50.000	114	99	85	71	57	50.000	134	117	101	83	67	25.000	156	136	117	97	78
H.1.4	50.000	107	93	80	67	54	50.000	126	110	95	78	63	25.000	141	123	106	88	71
H.2.1	50.000	219	191	164	136	110	50.000	232	202	174	144	116	50.000	388	338	291	241	194
H.3.1	50.000	201	175	151	125	101	50.000	285	248	213	176	142	38.000	336	292	252	208	168
O.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
O.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
O.2.1	50.000	212	185	159	132	106	50.000	200	174	150	124	100	38.000	316	275	237	196	158
O.2.2	50.000	212	185	159	132	106	50.000	200	174	150	124	100	38.000	316	275	237	196	158
O.3.1																		

Index	52 802 ..., 52 804 ..., 52 806 ...												● 1st choice ○ suitable		
	Ø DC (mm) = 1,0–1,4						Ø DC (mm) = 1,5–1,7						Emulsion	Compressed air	MMS
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6 –1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\ max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\ max.}$	0,45	0,45	0,45	0,45	0,3			
	$n_{min.}$	6.500					$n_{min.}$	6.500							
	n	v_f (mm/min)					n	v_f (mm/min)							
P.1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●	○	○
P.1.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●	○	○
P.1.3	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●	○	○
P.1.4	50.000	671	584	503	416	335	33.000	1039	904	779	644	520	●	○	○
P.1.5	50.000	671	584	503	416	335	33.000	1039	904	779	644	520	●	○	○
P.2.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.2.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.2.3	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.2.4	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.3.1	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.3.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.3.3	50.000	671	584	503	416	335	33.000	1039	904	779	644	520		●	○
P.4.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
P.4.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600		●	○
M.1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●		○
M.2.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●		○
M.3.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	●		○
K.1.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.1.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.2.1	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.2.2	50.000	775	674	581	480	387	33.000	1200	1044	900	744	600	○	●	
K.3.1	50.000	389	338	292	241	194	21.000	548	477	411	340	274		●	
K.3.2	25000	389	338	292	241	194	21.000	548	477	411	340	274		●	
N.1.1	50.000	930	809	697	576	465	50.000	1500	1305	1125	930	750	●		○
N.1.2	50.000	930	809	697	576	465	50.000	1500	1305	1125	930	750	●		○
N.2.1															
N.2.2															
N.2.3															
N.3.1	44.000	775	674	581	480	387	29.000	1160	1009	870	719	580	●		○
N.3.2	50.000	930	809	697	576	465	38.000	1400	1218	1050	868	700	●		○
N.3.3	50.000	930	809	697	576	465	38.000	1400	1218	1050	868	700	●		○
N.4.1	50.000	849	738	636	526	424	38.000	1388	1207	1041	860	694	●		○
S.1.1	15.000	99	86	74	61	49	12.000	170	148	127	105	85	●		○
S.1.2	15.000	99	86	74	61	49	12.000	170	148	127	105	85	●		○
S.2.1	25.000	152	132	114	94	76	16.000	294	256	220	182	147	●		○
S.2.2	15.000	99	86	74	61	49	12.000	170	148	127	105	85	●		○
S.2.3	12.000	131	114	99	82	66	8.000	255	221	191	158	127	●		○
S.3.1	44.000	170	148	127	105	85	29.000	329	286	246	204	164	●		○
S.3.2	44.000	247	215	186	153	124	29.000	365	318	274	226	183	●		○
S.3.3	38.000	170	148	127	105	85	25.000	329	286	246	204	164	●		○
H.1.1	50.000	620	539	465	384	310	33.000	850	740	638	527	425		●	
H.1.2	38.000	537	467	402	333	268	25.000	779	678	585	483	390		●	
H.1.3	25.000	235	204	176	146	117	16.000	346	301	260	215	173		●	
H.1.4	25.000	221	193	166	137	111	16.000	327	284	245	202	163		●	
H.2.1	50.000	620	539	465	384	310	33.000	850	740	638	527	425		●	
H.3.1	38.000	537	467	402	333	268	25.000	779	678	585	483	390		●	
O.1.1	50.000	930	809	697	576	465	38.000	1520	1322	1140	942	760	●	○	○
O.1.2	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	●	○	○
O.2.1	38.000	495	431	371	307	247	25.000	685	596	513	424	342	●	○	○
O.2.2	38.000	495	431	371	307	247	25.000	685	596	513	424	342	●	○	○
O.3.1															

Cutting data standard values – Micro cutter – 2.2xDC

Index	52 802 ..., 52 804 ..., 52 806 ...												● 1st choice ○ suitable		
	Ø DC (mm) = 1,8–1,9						Ø DC (mm) = 2,0						Emulsion	Compressed air	MMS
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,54	0,54	0,54	0,54	0,36	$a_{p\,max.}$	0,6	0,6	0,6	0,6	0,4			
	$n_{min.}$	5.500					$n_{min.}$	5.000							
	n	v_f (mm/min)					n	v_f (mm/min)							
P.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.5	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.4.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.4.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
M.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
M.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
M.3.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
K.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.2.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.3.1	18.000	630	548	473	391	315	12.000	750	650	550	450	350		●	
K.3.2	18.000	630	548	473	391	315	12.000	750	650	550	450	350		●	
N.1.1	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750	●		○
N.1.2	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750	●		○
N.2.1															
N.2.2															
N.2.3															
N.3.1	25.000	1250	1088	938	775	625	19.000	1140	990	855	700	570	●		○
N.3.2	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750	●		○
N.3.3	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750	●		○
N.4.1	33.000	1560	1357	1170	967	780	25.000	1500	1300	1125	930	750	●		○
S.1.1	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.1.2	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.2.1	14.000	420	365	315	260	210	12.500	500	400	350	300	250	●		○
S.2.2	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.2.3	7.000	370	322	278	229	185	6.000	300	260	230	200	160	●		○
S.3.1	25.000	400	348	300	248	200	25.000	1500	1300	1125	930	750	●		○
S.3.2	25.000	480	418	360	298	240	25.000	1500	1300	1125	930	750	●		○
S.3.3	22.000	380	331	285	236	190	25.000	1500	1300	1125	930	750	●		○
H.1.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
H.1.2	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
H.1.3	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
H.1.4	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
H.2.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
H.3.1	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
O.1.1	33.000	1560	1357	1170	967	780	19.000	1140	990	855	700	570	●	○	○
O.1.2	28.000	1400	1218	1050	868	700	19.000	1140	990	855	700	570	●	○	○
O.2.1	22.000	800	696	600	496	400	12.000	720	630	540	450	360	●	○	○
O.2.2	22.000	800	696	600	496	400	12.000	720	630	540	450	360	●	○	○
O.3.1															

Cutting data standard values – Micro cutter – 5xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																● 1st choice ○ suitable		
	Ø DC (mm) = 0,2–0,4 mm					Ø DC (mm) = 0,5–0,7 mm					Ø DC (mm) = 0,8–0,9 mm								
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	Emulsion	Compressed air	MMS
	$a_{p\,max.}$	0,012				$a_{p\,max.}$	0,06				$a_{p\,max.}$	0,12				0,064			
	$n_{min.}$	30.000				$n_{min.}$	12.000				$n_{min.}$	8.000							
	n	v_f (mm/min)				n	v_f (mm/min)				n	v_f (mm/min)							
P.1.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.3	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.4	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165	●	○	○
P.1.5	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165	●	○	○
P.2.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.2.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.2.3	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.2.4	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.3.1	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.3.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.3.3	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.4.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.4.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
M.1.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
M.2.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
M.3.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
K.1.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.1.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.2.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.2.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.3.1	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	
K.3.2	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	
N.1.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.1.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1	50.000	232	202	174	144	50.000	274	238	205	170	38.000	485	422	364	301	242	●		○
N.3.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.3.3	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.4.1	50.000	212	185	159	132	50.000	250	218	188	155	50.000	506	440	379	314	253	●		○
S.1.1	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.1.2	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.2.1	50.000	63	54	47	39	44.000	76	66	57	47	22.000	91	79	68	56	45	●		○
S.2.2	50.000	55	47	40	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.2.3	50.000	46	40	35	29	25.000	55	48	41	34	12.000	78	68	59	49	39	●		○
S.3.1	50.000	60	61	48	41	50.000	71	62	53	44	38.000	114	99	85	71	57	●		○
S.3.2	50.000	60	61	48	41	50.000	71	62	53	44	38.000	126	110	95	78	63	●		○
S.3.3	50.000	60	52	45	37	50.000	71	62	49	39	31.000	89	77	66	55	44	●		○
H.1.1	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●	
H.1.2	50.000	95	83	71	59	44.000	134	117	101	83	22.000	180	157	135	112	90		●	
H.1.3	50.000	89	78	67	55	44.000	126	110	95	78	22.000	170	148	127	105	85		●	
H.1.4																			
H.2.1	50.000	155	135	116	96	50.000	164	143	123	102	44.000	346	301	260	215	173		●	
H.3.1	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●	
O.1.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●	○	○
O.1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	554	482	416	344	277	●	○	○
O.2.1	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158	●	○	○
O.2.2	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158	●	○	○
O.3.1																			

a_e= 0.6–1.0 x DC: If values are missing, only trochoidal slot milling and profiling are permitted. Otherwise, there is the risk of tool breakage.

14

Cutting data standard values – Micro cutter – 5xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																	
	Ø DC (mm) = 1,0–1,4						Ø DC (mm) = 1,5–1,7						Ø DC (mm) = 1,8–1,9					
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,3				0,2	$a_{p\,max.}$	0,3				0,2	$a_{p\,max.}$	0,54				0,36
	$n_{min.}$	6.500					$n_{min.}$	6.500					$n_{min.}$	5.500				
	n	v_f (mm/min)					n	v_f (mm/min)					n	v_f (mm/min)				
P.1.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.3	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.4	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.1.5	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.2.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.2.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.2.3	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.2.4	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.3.1	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.3.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.3.3	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.4.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.4.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
M.1.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
M.2.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
M.3.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
K.1.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.1.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.2.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.2.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.3.1	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
K.3.2	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
N.1.1	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
N.1.2	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	38.000	697	607	523	432	349	25.000	1000	870	750	620	500	22.000	1100	957	825	682	550
N.3.2	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
N.3.3	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
N.4.1	50.000	849	738	636	526	424	33.000	1205	1048	904	747	602	28.000	1400	1218	1050	868	700
S.1.1	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.1.2	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.2.1	22.000	114	99	85	71	57	14.000	196	170	147	121	98	12.000	300	261	225	186	150
S.2.2	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.2.3	12.000	131	114	99	82	66	8.000	170	148	127	105	85	7.000	240	209	180	149	120
S.3.1	38.000	156	135	117	96	78	25.000	274	238	205	170	137	22.000	380	331	285	236	190
S.3.2	38.000	212	185	159	132	106	25.000	365	318	274	226	183	22.000	450	392	338	279	225
S.3.3	31.000	127	111	95	79	64	21.000	201	175	151	125	100	18.000	300	261	225	186	150
H.1.1	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
H.1.2	22.000	235	204	176	146	117	14.000	346	301	260	215	173	12.000	450	392	338	279	225
H.1.3	22.000	221	193	166	137	111	14.000	327	284	245	202	163	12.000	450	392	338	279	225
H.1.4																		
H.2.1	44.000	426	371	320	264	213	29.000	600	522	450	372	300	25.000	800	696	600	496	400
H.3.1	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
O.1.1	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
O.1.2	44.000	813	708	610	504	407	29.000	1160	1009	870	719	580	25.000	1200	1044	900	744	600
O.2.1	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
O.2.2	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
O.3.1																		

Index	52 802 ..., 52 804 ..., 52 806 ...						● 1st choice ○ suitable		
	Ø DC (mm) = 2,0								
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,6				0,4			
	$n_{min.}$	5.000							
	n	v_f (mm/min)					Emulsion	Compressed air	MMS
P.1.1	22.000	1320	1148	990	818	660	●	○	○
P.1.2	22.000	1320	1148	990	818	660	●	○	○
P.1.3	22.000	1320	1148	990	818	660	●	○	○
P.1.4	15.000	900	783	675	558	450	●	○	○
P.1.5	15.000	900	783	675	558	450	●	○	○
P.2.1	22.000	1320	1148	990	818	660		●	○
P.2.2	22.000	1320	1148	990	818	660		●	○
P.2.3	15.000	900	783	675	558	450		●	○
P.2.4	15.000	900	783	675	558	450		●	○
P.3.1	15.000	900	783	675	558	450		●	○
P.3.2	22.000	1320	1148	990	818	660		●	○
P.3.3	15.000	900	783	675	558	450		●	○
P.4.1	22.000	1320	1148	990	818	660		●	○
P.4.2	22.000	1320	1148	990	818	660		●	○
M.1.1	15.000	900	783	675	558	450	●		○
M.2.1	15.000	900	783	675	558	450	●		○
M.3.1	15.000	900	783	675	558	450	●		○
K.1.1	25.000	1500	1305	1125	930	750	○	●	
K.1.2	25.000	1500	1305	1125	930	750	○	●	
K.2.1	25.000	1500	1305	1125	930	750	○	●	
K.2.2	25.000	1500	1305	1125	930	750	○	●	
K.3.1	12.000	520	452	390	322	260		●	
K.3.2	12.000	520	452	390	322	260		●	
N.1.1	31.000	1860	1618	1395	1153	930	●		○
N.1.2	31.000	1860	1618	1395	1153	930	●		○
N.2.1									
N.2.2									
N.2.3									
N.3.1	19.000	1140	992	855	707	570	●		○
N.3.2	25.000	1500	1305	1125	930	750	●		○
N.3.3	25.000	1500	1305	1125	930	750	●		○
N.4.1	25.000	1500	1305	1125	930	750	●		○
S.1.1	7.000	300	261	225	186	150	●		○
S.1.2	7.000	300	261	225	186	150	●		○
S.2.1	11.000	400	348	300	248	200	●		○
S.2.2	7.000	300	261	225	186	150	●		○
S.2.3	6.000	260	226	195	161	130	●		○
S.3.1	19.000	420	365	315	260	210	●		○
S.3.2	19.000	500	435	375	310	250	●		○
S.3.3	15.000	400	348	300	248	200	●		○
H.1.1	15.000	500	435	375	310	250		●	
H.1.2	11.000	480	418	360	298	240		●	
H.1.3	11.000	480	418	360	298	240		●	
H.1.4									
H.2.1	22.000	1000	870	750	620	500		●	
H.3.1	15.000	500	435	375	310	250		●	
O.1.1	25.000	1500	1305	1125	930	750	●	○	○
O.1.2	22.000	1320	1148	990	818	660	●	○	○
O.2.1	15.000	660	574	495	409	330	●	○	○
O.2.2	15.000	660	574	495	409	330	●	○	○
O.3.1									

Cutting data standard values – Micro cutter – 10xDC

Index	52 802 ..., 52 804 ..., 52 806 ...																	
		Ø DC (mm) = 0,2–0,4				Ø DC (mm) = 0,5–0,7					Ø DC (mm) = 0,8–0,9				Ø DC (mm) = 1,0–1,4			
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC
	$a_{p\,max.}$	0,006	0,006	0,006	0,006	0,015	0,015	0,015	0,015	$a_{p\,max.}$	0,024	0,024	0,024	0,024	0,03	0,03	0,03	0,03
	$n_{min.}$	30.000				12.000				$n_{min.}$	8.000				6.500			
	n	v_f (mm/min)								n	v_f (mm/min)							
P.1.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.3	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.4	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.1.5	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.2.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.2.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.2.3	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.2.4	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.3.1	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.3.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.3.3	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.4.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.4.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
M.1.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
M.2.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
M.3.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
K.1.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.1.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.2.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.2.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.3.1	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
K.3.2	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
N.1.1	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
N.1.2	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	50.000	232	202	174	144	274	238	205	170	31.000	402	350	301	249	480	418	360	298
N.3.2	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
N.3.3	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
N.4.1	50.000	212	185	159	132	300	261	225	186	44.000	506	440	379	314	742	646	557	460
S.1.1	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.1.2	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.2.1	50.000	54	47	40	33	63	55	47	39	19.000	102	89	76	63	126	110	95	78
S.2.2	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.2.3	50.000	46	40	35	29	55	48	41	34	12.000	59	51	44	36	82	71	62	51
S.3.1	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	141	123	106	88
S.3.2	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	177	154	133	110
S.3.3	50.000	60	52	45	37	71	62	53	44	25.000	89	77	66	55	141	123	106	88
H.1.1	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
H.1.2	50.000	47	41	36	29	67	58	50	42	19.000	90	78	68	56	101	88	75	62
H.1.3	50.000	45	39	34	28	63	55	47	39	19.000	85	74	64	53	95	83	71	59
H.1.4																		
H.2.1	50.000	77	67	58	48	82	71	62	51	38.000	173	151	130	107	194	168	145	120
H.3.1	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
O.1.1	50.000	232	202	174	144	329	286	246	204	44.000	554	482	416	344	813	708	610	504
O.1.2	50.000	232	202	174	144	329	286	246	204	38.000	554	482	416	344	705	613	529	437
O.2.1	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
O.2.2	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
O.3.1																		

a_e= 0,6–1,0 x DC: Missing values only trochodial slotting and milling is recommended. Otherwise there is the risk of tool breakage.

Index	52 802 ..., 52 804 ..., 52 806 ...															● 1st choice ○ suitable		
	Ø DC (mm) = 1,5–1,7					Ø DC (mm) = 1,8–1,9					Ø DC (mm) = 2,0							
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC			
	$a_{p\,max.}$	0,06	0,06	0,06	0,06	$a_{p\,max.}$	0,072	0,072	0,072	0,072	$a_{p\,max.}$	0,08	0,08	0,08	0,08			
	$n_{min.}$	6.500				$n_{min.}$	5.500				$n_{min.}$	5.000						
	n	v_f (mm/min)				n	v_f (mm/min)				n	v_f (mm/min)				Emulsion	Compressed air	MMS
P.1.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.3	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.4	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446	●	○	○
P.1.5	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446	●	○	○
P.2.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.2.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.2.3	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.2.4	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.3.1	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.3.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.3.3	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.4.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.4.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
M.1.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
M.2.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
M.3.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
K.1.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.1.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.2.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.2.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.3.1	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	
K.3.2	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	
N.1.1	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042	●		○
N.1.2	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042	●		○
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	21.000	800	696	600	496	18.000	850	740	638	527	15.000	900	783	675	558	●		○
N.3.2	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707	●		○
N.3.3	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707	●		○
N.4.1	29.000	1059	921	794	657	25.000	1200	1044	900	744	22.000	1320	1148	990	818	●		○
S.1.1	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.1.2	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.2.1	12.000	204	178	153	127	10.000	300	261	225	186	9.000	350	305	263	217	●		○
S.2.2	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.2.3	8.000	106	92	80	66	7.000	200	174	150	124	6.000	220	191	165	136	●		○
S.3.1	21.000	228	199	171	141	18.000	300	261	225	186	15.000	380	331	285	236	●		○
S.3.2	21.000	274	238	205	170	18.000	400	348	300	248	15.000	450	392	338	279	●		○
S.3.3	16.000	237	206	178	147	14.000	300	261	225	186	12.000	380	331	285	236	●		○
H.1.1	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
H.1.2	12.000	173	151	130	107	10.000	200	174	150	124	9.000	240	209	180	149		●	
H.1.3	12.000	163	142	122	101	10.000	200	174	150	124	9.000	240	209	180	149		●	
H.1.4																		
H.2.1	25.000	300	261	225	186	21.000	400	348	300	248	19.000	500	435	375	310		●	
H.3.1	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
O.1.1	29.000	1160	1009	870	719	25.000	1200	1044	900	744	22.000	1320	1148	990	818	●	○	○
O.1.2	25.000	1000	870	750	620	18.000	1000	870	750	620	19.000	1140	992	855	707	●	○	○
O.2.1	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322	●	○	○
O.2.2	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322	●	○	○
O.3.1																		

Cutting data standard values – MultiLock – Radius milling cutter

Index	53 803 ..., 53 804 ...						● 1st choice ○ suitable		
	CTC5240	CTPX225	Ø DC (mm) = 12	16	20	25	Emulsion	Compressed air	MMS
	v_c (m/min)		a_e / a_p= 0,05 x DC f_z (mm)						
P.1.1		180	0,12	0,15	0,18	0,20	●	○	○
P.1.2		160	0,13	0,16	0,19	0,21	●	○	○
P.1.3		160	0,13	0,16	0,19	0,21	●	○	○
P.1.4		140	0,10	0,13	0,16	0,18	●	○	○
P.1.5		140	0,10	0,13	0,16	0,18	●	○	○
P.2.1		150	0,10	0,13	0,16	0,18	●	○	○
P.2.2		150	0,10	0,13	0,16	0,18	●	○	○
P.2.3		90	0,09	0,10	0,13	0,14	●	○	○
P.2.4		90	0,09	0,10	0,13	0,14	●	○	○
P.3.1		80	0,07	0,09	0,11	0,12	●	○	○
P.3.2		80	0,07	0,09	0,11	0,12	●	○	○
P.3.3		80	0,07	0,09	0,11	0,12	●	○	○
P.4.1		60	0,09	0,10	0,13	0,14	●		○
P.4.2		50	0,09	0,10	0,13	0,14	●		○
M.1.1		50	0,07	0,09	0,11	0,12	●		○
M.2.1		40	0,06	0,08	0,10	0,11	●		○
M.3.1		50	0,07	0,09	0,11	0,12	●		○
K.1.1		150	0,13	0,17	0,21	0,23	●	○	○
K.1.2		120	0,12	0,15	0,18	0,20	●	○	○
K.2.1		140	0,13	0,16	0,19	0,21	●	○	○
K.2.2		120	0,10	0,13	0,16	0,18	●	○	○
K.3.1		120	0,13	0,16	0,19	0,21	●	○	○
K.3.2		100	0,12	0,15	0,18	0,20	●	○	○
N.1.1		500	0,20	0,25	0,30	0,33	●		○
N.1.2		450	0,20	0,25	0,30	0,33	●		○
N.2.1									
N.2.2		380	0,19	0,24	0,28	0,31	●		○
N.2.3		150	0,16	0,20	0,24	0,26	●		○
N.3.1		220	0,13	0,17	0,21	0,23	●		○
N.3.2		190	0,13	0,17	0,21	0,23	●		○
N.3.3		250	0,13	0,16	0,19	0,21	●		○
N.4.1									
S.1.1	60		0,08	0,11	0,16	0,17	●		
S.1.2									
S.2.1	60		0,08	0,11	0,16	0,17	●		
S.2.2	60		0,08	0,11	0,16	0,17	●		
S.2.3									
S.3.1	140		0,11	0,16	0,21	0,22	●		
S.3.2	100		0,08	0,11	0,16	0,17	●		
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

Cutting data standard values – MultiLock – Torus cutter

Index	CTC5240	CTPX225	53 805 ..., 53 806 ...								● 1st choice ○ suitable		
			Ø DC (mm) =										
			12		16		20		25				
			a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC	a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC	a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC	a_e = 0,1–0,3 x DC	a_e = 0,3–0,6 x DC			
			$a_{p\,max.}$ (mm) =										
			3,0		4,5		6,0		8,0				
	v_c (m/min)		f_z (mm)								Emulsion	Compressed air	MMS
P.1.1		180	0,08	0,05	0,11	0,07	0,14	0,08	0,15	0,08	●	○	○
P.1.2		160	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
P.1.3		160	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
P.1.4		140	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.1.5		140	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.2.1		150	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.2.2		150	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
P.2.3		90	0,06	0,03	0,08	0,05	0,10	0,06	0,11	0,06	●	○	○
P.2.4		90	0,06	0,03	0,08	0,05	0,10	0,06	0,11	0,06	●	○	○
P.3.1		80	0,05	0,03	0,07	0,04	0,09	0,06	0,10	0,06	●	○	○
P.3.2		80	0,05	0,03	0,07	0,04	0,09	0,06	0,10	0,06	●	○	○
P.3.3		80	0,05	0,03	0,07	0,04	0,09	0,06	0,10	0,06	●	○	○
P.4.1		60	0,06	0,05	0,08	0,07	0,10	0,09	0,11	0,09	●		○
P.4.2		50	0,06	0,05	0,08	0,07	0,10	0,09	0,11	0,09	●		○
M.1.1		50	0,05	0,04	0,07	0,06	0,09	0,08	0,10	0,08	●		○
M.2.1		40	0,04	0,03	0,06	0,05	0,08	0,07	0,09	0,07	●		○
M.3.1		50	0,05	0,04	0,07	0,06	0,09	0,08	0,10	0,08	●		○
K.1.1		150	0,09	0,06	0,13	0,08	0,16	0,10	0,18	0,10	●	○	○
K.1.2		120	0,08	0,05	0,11	0,07	0,14	0,08	0,15	0,08	●	○	○
K.2.1		140	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
K.2.2		120	0,07	0,04	0,10	0,06	0,13	0,08	0,14	0,08	●	○	○
K.3.1		120	0,09	0,05	0,12	0,07	0,15	0,09	0,17	0,09	●	○	○
K.3.2		100	0,08	0,05	0,11	0,07	0,14	0,08	0,15	0,08	●	○	○
N.1.1													
N.1.2													
N.2.1													
N.2.2													
N.2.3													
N.3.1													
N.3.2		220	0,09	0,06	0,13	0,08	0,16	0,10	0,18	0,10	●		○
N.3.3													
N.4.1													
S.1.1	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.1.2	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.2.1	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.2.2	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.2.3	60		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.3.1	140		0,10	0,05	0,15	0,08	0,2	0,11	0,22	0,13	●		
S.3.2	100		0,07	0,04	0,10	0,06	0,15	0,08	0,17	0,10	●		
S.3.3													
H.1.1													
H.1.2													
H.1.3													
H.1.4													
H.2.1													
H.3.1													
O.1.1													
O.1.2													
O.2.1													
O.2.2													
O.3.1													

Plunging angle for ramping milling = 1.9°
Plunging angle for helical milling = 1.5°
Bore diameter with helical milling = D_{min} 1.7xDC / D_{max} 1.95xDC
With ramping and helical milling, multiply the f_z by 0.5

14

Cutting data standard values – MultiLock – HFC milling cutter

Index	CTC5240	CTPX225	53 801 ..., 53 802 ...												● 1st choice ○ suitable		
			Ø DC (mm) =														
			12			16			20			25					
			a_e x DC =														
			0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0			
			$a_{p\,max.}$ (mm) =														
			0,5			0,8			0,8			0,8					
	v_c (m/min)		f_z (mm)												Emulsion	Compressed air	MMS
P.1.1		200	0,45	0,36	0,26	0,63	0,47	0,30	0,81	0,60	0,38	0,89	0,63	0,38	●	○	○
P.1.2		180	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
P.1.3		180	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
P.1.4		150	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.1.5		150	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.2.1		170	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.2.2		170	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
P.2.3		100	0,33	0,26	0,20	0,46	0,34	0,22	0,59	0,44	0,28	0,65	0,47	0,28	●	○	○
P.2.4		100	0,33	0,26	0,20	0,46	0,34	0,22	0,59	0,44	0,28	0,65	0,47	0,28	●	○	○
P.3.1		90	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,25	0,57	0,41	0,25	●	○	○
P.3.2		90	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,25	0,57	0,41	0,25	●	○	○
P.3.3		90	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,25	0,57	0,41	0,25	●	○	○
P.4.1		70	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●		○
P.4.2		60	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●		○
M.1.1		55	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,24	0,57	0,40	0,24	●		○
M.2.1		40	0,25	0,20	0,15	0,35	0,26	0,17	0,44	0,33	0,21	0,49	0,35	0,21	●		○
M.3.1		60	0,29	0,23	0,17	0,41	0,30	0,19	0,52	0,38	0,24	0,57	0,40	0,24	●		○
K.1.1		170	0,53	0,42	0,32	0,74	0,55	0,35	0,96	0,71	0,45	1,06	0,75	0,45	●	○	○
K.1.2		130	0,45	0,36	0,26	0,63	0,47	0,3	0,81	0,59	0,38	0,89	0,63	0,38	●	○	○
K.2.1		150	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
K.2.2		130	0,41	0,33	0,24	0,57	0,42	0,27	0,74	0,54	0,35	0,82	0,58	0,35	●	○	○
K.3.1		130	0,50	0,39	0,29	0,69	0,51	0,33	0,89	0,65	0,41	0,98	0,69	0,41	●	○	○
K.3.2		110	0,45	0,36	0,26	0,63	0,47	0,30	0,81	0,59	0,38	0,89	0,63	0,38	●	○	○
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.1.2	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.2.1	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.2.2	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.2.3	60		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.3.1	140		0,18	0,15	0,11	0,20	0,15	0,11	0,21	0,18	0,14	0,23	0,19	0,16	●		
S.3.2	100		0,25	0,19	0,14	0,26	0,19	0,12	0,28	0,22	0,17	0,29	0,24	0,18	●		
S.3.3	140		0,18	0,15	0,11	0,20	0,15	0,11	0,22	0,18	0,14	0,23	0,20	0,16	●		
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

Plunging angle for ramping and helical milling = 1.9°
Bore diameter with helical milling = D_{min} 1.6xDC / D_{max} 1.95xDC
With ramping and helical milling, multiply the f_z by 0.5

Cutting data standard values – MultiLock – Deburring cutter

Index	CTPX225	53800 ...		● 1st choice ○ suitable		
		Ø DC (mm) =				
		12	16			
		a_e x DC =				
		0,1–0,2	0,1–0,3			
		$a_{p\,max.}$ (mm) =				
		4	6			
	v_c (m/min)	f_z (mm)		Emulsion	Compressed air	MMS
P.1.1	200	0,09	0,12	●	○	○
P.1.2	180	0,10	0,13	●	○	○
P.1.3	180	0,10	0,13	●	○	○
P.1.4	150	0,08	0,11	●	○	○
P.1.5	150	0,08	0,11	●	○	○
P.2.1	170	0,08	0,11	●	○	○
P.2.2	170	0,08	0,11	●	○	○
P.2.3	100	0,07	0,09	●	○	○
P.2.4	100	0,07	0,09	●	○	○
P.3.1	90	0,06	0,08	●	○	○
P.3.2	90	0,06	0,08	●	○	○
P.3.3	90	0,06	0,08	●	○	○
P.4.1	70	0,07	0,09	●		○
P.4.2	60	0,07	0,09	●		○
M.1.1	60	0,06	0,08	●		○
M.2.1	40	0,05	0,07	●		○
M.3.1	60	0,06	0,08	●		○
K.1.1	170	0,11	0,14	●	○	○
K.1.2	130	0,09	0,12	●	○	○
K.2.1	150	0,10	0,13	●	○	○
K.2.2	130	0,08	0,11	●	○	○
K.3.1	130	0,10	0,13	●	○	○
K.3.2	110	0,09	0,12	●	○	○
N.1.1	550	0,16	0,21	●		
N.1.2	500	0,16	0,21	●		
N.2.1						
N.2.2	420	0,15	0,20	●		
N.2.3	170	0,13	0,17	●		
N.3.1	240	0,11	0,14	●		
N.3.2	210	0,11	0,14	●		
N.3.3	280	0,10	0,13	●		
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – MultiChange – PCR-UNI

Index	52 871 ...													
	Correction factor f_z and v_c Tool holder				Feedrates for extra short and short holder									
					Ø DC (mm) =					Ø DC (mm) =				
					10,0	12,0	16,0	20,0		10,0	12,0	16,0	20,0	
					a_e 0,25xDC					a_e 1xDC				
Index	Medium-length version	Type long	Type extra long	$a_{p\,max.}$	v_c (m/min)	f_z (mm)				v_c (m/min)	f_z (mm)			
P.1.1	**0,9**	**0,7***	**0,6***	0,56	**490**	0,057	0,065	0,080	0,091	**240**	0,028	0,033	0,040	0,046
P.1.2	**0,9**	**0,7***	**0,6***	0,56	**470**	0,054	0,062	0,076	0,087	**230**	0,027	0,031	0,038	0,044
P.1.3	**0,9**	**0,7***	**0,6***	0,56	**445**	0,052	0,059	0,073	0,083	**220**	0,026	0,030	0,036	0,041
P.1.4	**0,9**	**0,7***	**0,6***	0,56	**425**	0,049	0,056	0,069	0,079	**205**	0,025	0,028	0,034	0,039
P.1.5	**0,9**	**0,7***	**0,6***	0,56	**400**	0,047	0,053	0,065	0,075	**195**	0,023	0,027	0,033	0,037
P.2.1	**0,9**	**0,7***	**0,6***	0,56	**445**	0,057	0,065	0,080	0,091	**220**	0,028	0,033	0,040	0,046
P.2.2	**0,9**	**0,7***	**0,6***	0,56	**405**	0,052	0,059	0,073	0,083	**200**	0,026	0,030	0,036	0,041
P.2.3	**0,9**	**0,7***	**0,6***	0,56	**365**	0,047	0,053	0,065	0,075	**180**	0,023	0,027	0,033	0,037
P.2.4	**0,9**	**0,7***	**0,6***	0,56	**285**	0,043	0,050	0,060	0,069	**140**	0,022	0,025	0,030	0,035
P.3.1	**0,9**	**0,7***	**0,6***	0,56	**265**	0,050	0,057	0,070	0,080	**130**	0,025	0,029	0,035	0,040
P.3.2	**0,9**	**0,7***	**0,6***	0,56	**245**	0,047	0,054	0,067	0,076	**120**	0,024	0,027	0,033	0,038
P.3.3	**0,9**	**0,7***	**0,6***	0,56	**225**	0,045	0,051	0,063	0,072	**110**	0,022	0,026	0,031	0,036
P.4.1	**0,9**	**0,7***	**0,6***	0,56	**180**	0,034	0,040	0,048	0,055	**90**	0,017	0,020	0,024	0,028
P.4.2	**0,9**	**0,7***	**0,6***	0,56	**180**	0,034	0,040	0,048	0,055	**90**	0,017	0,020	0,024	0,028
M.1.1	0,9	0,7*	0,6*	0,56	120	0,030	0,035	0,042	0,048	60	0,015	0,017	0,021	0,024
M.2.1	0,9	0,7*	0,6*	0,56	115	0,025	0,029	0,035	0,040	55	0,012	0,014	0,018	0,020
M.3.1	0,9	0,7*	0,6*	0,56	120	0,026	0,030	0,036	0,041	60	0,013	0,015	0,018	0,021
K.1.1	**0,9**	**0,7***	**0,6***	0,56	**485**	0,086	0,099	0,121	0,138	**240**	0,043	0,050	0,060	0,069
K.1.2	**0,9**	**0,7***	**0,6***	0,56	**365**	0,060	0,069	0,085	0,097	**180**	0,030	0,035	0,042	0,048
K.2.1	**0,9**	**0,7***	**0,6***	0,56	**445**	0,073	0,084	0,103	0,118	**220**	0,037	0,042	0,051	0,059
K.2.2	**0,9**	**0,7***	**0,6***	0,56	**365**	0,060	0,069	0,085	0,097	**180**	0,030	0,035	0,042	0,048
K.3.1	**0,9**	**0,7***	**0,6***	0,56	**325**	0,060	0,069	0,085	0,097	**160**	0,030	0,035	0,042	0,048
K.3.2	**0,9**	**0,7***	**0,6***	0,56	**305**	0,052	0,059	0,073	0,083	**150**	0,026	0,030	0,036	0,041

* = Trimming and trochoidal slot milling

Cutting data standard values – MultiChange – PCR-ALU

Index	52 872 ...													
	Correction factor f_z and v_c Tool holder				Feedrates for extra short and short holder									
					Ø DC (mm) =					Ø DC (mm) =				
					10,0	12,0	16,0	20,0		10,0	12,0	16,0	20,0	
					a_e 0,25xDC					a_e 1xDC				
Index	Medium-length version	Type long	Type extra long	$a_{p\,max.}$	v_c (m/min)	f_z (mm)				v_c (m/min)	f_z (mm)			
N.1.1	**0,9**	**0,7***	**0,6***	0,56	**1035**	0,169	0,194	0,237	0,271	**675**	0,084	0,097	0,119	0,136
N.1.2	**0,9**	**0,7***	**0,6***	0,56	**945**	0,154	0,177	0,216	0,247	**610**	0,077	0,088	0,108	0,123
N.2.1	**0,9**	**0,7***	**0,6***	0,56	**625**	0,161	0,185	0,226	0,259	**405**	0,081	0,093	0,113	0,129
N.2.2	**0,9**	**0,7***	**0,6***	0,56	**500**	0,169	0,194	0,237	0,271	**325**	0,084	0,097	0,119	0,136
N.2.3	**0,9**	**0,7***	**0,6***	0,56	**360**	0,184	0,212	0,259	0,296	**235**	0,092	0,106	0,129	0,148
N.3.1	**0,9**	**0,7***	**0,6***	0,56	**450**	0,077	0,088	0,108	0,123	**295**	0,038	0,044	0,054	0,062
N.3.2	**0,9**	**0,7***	**0,6***	0,56	**270**	0,123	0,141	0,173	0,197	**175**	0,061	0,071	0,086	0,099
N.3.3	**0,9**	**0,7***	**0,6***	0,56	**360**	0,123	0,141	0,173	0,197	**235**	0,061	0,071	0,086	0,099
N.4.1														

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Index	52 871 ... Ramping Max. angle	Drilling f_z factor	Helical milling $\alpha_{R\,max.}$**	Max. plunging angle $D_{min.}$ 1,5 x DC	Max. plunging angle $D_{max.}$ 1,8 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.2	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.3	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.4	45°	0,9	0,56xDC	20°	13°	○	●	○
P.1.5	45°	0,9	0,56xDC	20°	13°	○	●	○
P.2.1	45°	0,8	0,56xDC	20°	13°	○	●	○
P.2.2	45°	0,8	0,56xDC	20°	13°	○	●	○
P.2.3	45°	0,8	0,56xDC	20°	13°	○	●	○
P.2.4	45°	0,7	0,56xDC	20°	13°	○	●	○
P.3.1	30°	0,8	0,56xDC	20°	13°	●		○
P.3.2	30°	0,7	0,56xDC	20°	13°	●		○
P.3.3	30°	0,7	0,56xDC	20°	13°	●		○
P.4.1	15°		0,56xDC	20°	13°	●		○
P.4.2	15°		0,56xDC	20°	13°	●		○
M.1.1	15°		0,4xDC	14°	9°	●		
M.2.1	15°		0,4xDC	14°	9°	●		
M.3.1	15°		0,4xDC	14°	9°	●		
K.1.1	45°	0,8	0,56xDC	20	13		●	
K.1.2	45°	0,8	0,56xDC	20	13		●	
K.2.1	45°	0,8	0,56xDC	20	13		●	
K.2.2	45°	0,8	0,56xDC	20	13		●	
K.3.1	45°	0,8	0,56xDC	20	13		●	
K.3.2	45°	0,8	0,56xDC	20	13		●	

Index	52 872 ... Ramping Max. angle	Drilling f_z factor	Helical milling $\alpha_{R\,max.}$**	Max. plunging angle $D_{min.}$ 1,5 x DC	Max. plunging angle $D_{max.}$ 1,8 x DC	● 1st choice ○ suitable Emulsion	Compressed air	MMS
N.1.1	45°	0,9	0,56xDC	20°	13°	●		○
N.1.2	45°	0,9	0,56xDC	20°	13°	●		○
N.2.1	45°	0,9	0,56xDC	20°	13°	●		○
N.2.2	45°	0,9	0,56xDC	20°	13°	●		○
N.2.3	45°	0,9	0,56xDC	20°	13°	●		○
N.3.1	45°	0,9	0,56xDC	20°	13°	●		○
N.3.2	45°	0,9	0,56xDC	20°	13°	●		○
N.3.3	45°	0,9	0,56xDC	20°	13°	●		○
N.4.1								

** Width of cut per helical revolution

14

Cutting data standard values – MultiChange – Shoulder milling heads

Index	52 860 ..., 52 861 ...																		● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder														Emulsion	Compressed air	MMS
					Ø DC (mm) =																
					8			10			12			16			20				
					$a_{p\,max.}$ =																
					5,2	4,4	3,6	6,5	5,5	4,5	7,8	6,6	5,4	10,4	8,8	7,2	13	11	9		
					a_e x DC =																
					0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0		
					f_z (mm)																
P.1.1	0,9	0,7*	0,6*	175	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	0,09	0,07	0,05	○	●	○
P.1.2	0,9	0,7*	0,6*	165	0,05	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,08	0,06	0,04	0,09	0,07	0,04	○	●	○
P.1.3	0,9	0,7*	0,6*	160	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04	○	●	○
P.1.4	0,9	0,7*	0,6*	150	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	○	●	○
P.1.5	0,9	0,7*	0,6*	145	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	○	●	○
P.2.1	0,9	0,7*	0,6*	160	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	0,09	0,07	0,05	○	●	○
P.2.2	0,9	0,7*	0,6*	145	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04	○	●	○
P.2.3	0,9	0,7*	0,6*	130	0,04	0,03	0,02	0,05	0,04	0,02	0,05	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	○	●	○
P.2.4	0,9	0,7*	0,6*	100	0,04	0,03	0,02	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	○	●	○
P.3.1	0,9	0,7*	0,6*	95	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04	●		○
P.3.2	0,9	0,7*	0,6*	85	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	0,07	0,05	0,03	0,08	0,06	0,04	●		○
P.3.3	0,9	0,7*	0,6*	80	0,04	0,03	0,02	0,05	0,03	0,02	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	●		○
P.4.1	0,9	0,7*	0,6*	65	0,03	0,02	0,01	0,03	0,03	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	●		○
P.4.2	0,9	0,7*	0,6*	65	0,03	0,02	0,01	0,03	0,03	0,02	0,04	0,03	0,02	0,05	0,04	0,02	0,06	0,04	0,03	●		○
M.1.1																						
M.2.1																						
M.3.1																						
K.1.1	0,9	0,7*	0,6*	175	0,07	0,05	0,04	0,09	0,07	0,04	0,10	0,07	0,05	0,12	0,09	0,06	0,14	0,10	0,07		●	
K.1.2	0,9	0,7*	0,6*	130	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	0,09	0,06	0,04	0,10	0,07	0,05		●	
K.2.1	0,9	0,7*	0,6*	160	0,06	0,05	0,03	0,07	0,06	0,04	0,09	0,06	0,04	0,10	0,08	0,05	0,12	0,09	0,06		●	
K.2.2	0,9	0,7*	0,6*	130	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	0,09	0,06	0,04	0,10	0,07	0,05		●	
K.3.1	0,9	0,7*	0,6*	115	0,05	0,04	0,03	0,06	0,05	0,03	0,07	0,05	0,04	0,09	0,06	0,04	0,10	0,07	0,05		●	
K.3.2	0,9	0,7*	0,6*	110	0,04	0,03	0,02	0,05	0,04	0,03	0,06	0,04	0,03	0,07	0,05	0,04	0,08	0,06	0,04		●	
N.1.1																						
N.1.2																						
N.2.1																						
N.2.2																						
N.2.3																						
N.3.1																						
N.3.2																						
N.3.3																						
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Rough-finishing milling heads

Index	52 862 ...														● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder Ø DC (mm) = 8 $a_{p\,max.}$ = 7,5 a_e x DC = 0,1–0,2 f_z (mm)		Ø DC (mm) = 10 $a_{p\,max.}$ = 9,4 a_e x DC = 0,1–0,2 f_z (mm)		Ø DC (mm) = 12 $a_{p\,max.}$ = 11,3 a_e x DC = 0,1–0,2 f_z (mm)		Ø DC (mm) = 16 $a_{p\,max.}$ = 15,0 a_e x DC = 0,1–0,2 f_z (mm)		Ø DC (mm) = 20 $a_{p\,max.}$ = 18,8 a_e x DC = 0,1–0,2 f_z (mm)		Emulsion	Compressed air	MMS
					0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4	0,1–0,2	0,3–0,4			
P.1.1	0,9	0,7*	0,6*	225	0,04	0,03	0,05	0,04	0,06	0,04	0,08	0,05	0,09	0,06	○	●	○
P.1.2	0,9	0,7*	0,6*	215	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	0,08	0,06	○	●	○
P.1.3	0,9	0,7*	0,6*	205	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	○	●	○
P.1.4	0,9	0,7*	0,6*	195	0,04	0,03	0,05	0,03	0,05	0,04	0,06	0,05	0,07	0,05	○	●	○
P.1.5	0,9	0,7*	0,6*	185	0,04	0,03	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	○	●	○
P.2.1	0,9	0,7*	0,6*	205	0,04	0,03	0,05	0,04	0,06	0,04	0,08	0,05	0,09	0,06	○	●	○
P.2.2	0,9	0,7*	0,6*	185	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	○	●	○
P.2.3	0,9	0,7*	0,6*	170	0,04	0,03	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	○	●	○
P.2.4	0,9	0,7*	0,6*	130	0,03	0,02	0,04	0,03	0,05	0,03	0,06	0,04	0,06	0,05	○	●	○
P.3.1	0,9	0,7*	0,6*	120	0,04	0,03	0,05	0,03	0,05	0,04	0,07	0,05	0,08	0,05	●		○
P.3.2	0,9	0,7*	0,6*	110	0,04	0,03	0,04	0,03	0,05	0,04	0,06	0,04	0,07	0,05	●		○
P.3.3	0,9	0,7*	0,6*	105	0,04	0,02	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	●		○
P.4.1	0,9	0,7*	0,6*	85	0,03	0,02	0,03	0,02	0,04	0,03	0,05	0,03	0,05	0,04	●		○
P.4.2	0,9	0,7*	0,6*	85	0,03	0,02	0,03	0,02	0,04	0,03	0,05	0,03	0,05	0,04	●		○
M.1.1	0,9	0,7*	0,6*	55	0,02	0,02	0,03	0,02	0,03	0,02	0,04	0,03	0,05	0,03	●		
M.2.1	0,9	0,7*	0,6*	50	0,02	0,01	0,02	0,02	0,03	0,02	0,03	0,02	0,04	0,03	●		
M.3.1	0,9	0,7*	0,6*	55	0,02	0,01	0,02	0,02	0,03	0,02	0,03	0,02	0,04	0,03	●		
K.1.1	0,9	0,7*	0,6*	225	0,07	0,05	0,08	0,06	0,09	0,07	0,11	0,08	0,13	0,09		●	
K.1.2	0,9	0,7*	0,6*	170	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,09	0,06		●	
K.2.1	0,9	0,7*	0,6*	205	0,06	0,04	0,07	0,05	0,08	0,06	0,10	0,07	0,11	0,08		●	
K.2.2	0,9	0,7*	0,6*	170	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,09	0,06		●	
K.3.1	0,9	0,7*	0,6*	150	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06	0,09	0,06		●	
K.3.2	0,9	0,7*	0,6*	140	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	0,08	0,06		●	
N.1.1	0,9	0,7*	0,6*	785	0,08	0,05	0,09	0,06	0,10	0,07	0,13	0,09	0,15	0,10	●		○
N.1.2	0,9	0,7*	0,6*	715	0,07	0,05	0,08	0,06	0,09	0,07	0,12	0,08	0,13	0,09	●		○
N.2.1	0,9	0,7*	0,6*	475	0,07	0,05	0,09	0,06	0,10	0,07	0,12	0,09	0,14	0,10	●		○
N.2.2	0,9	0,7*	0,6*	380	0,08	0,05	0,09	0,06	0,10	0,07	0,13	0,09	0,15	0,10	●		○
N.2.3	0,9	0,7*	0,6*	275	0,08	0,06	0,10	0,07	0,11	0,08	0,14	0,10	0,16	0,11	●		○
N.3.1	0,9	0,7*	0,6*	340	0,03	0,02	0,04	0,03	0,05	0,03	0,06	0,04	0,07	0,05	●		○
N.3.2	0,9	0,7*	0,6*	205	0,06	0,04	0,07	0,05	0,08	0,05	0,09	0,07	0,11	0,07	●		○
N.3.3	0,9	0,7*	0,6*	275	0,06	0,04	0,07	0,05	0,08	0,05	0,09	0,07	0,11	0,07	●		○
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1																	
S.3.2																	
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – HFC milling heads

Index	52 864 ...																					● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	$a_{p\,max.}$ x DCX	Feedrates for extra short and short holder																Emulsion	Compressed air	MMS
						Ø DCX (mm) =																		
						8			10			12			16			20					
						a_e x DCX =																		
						0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0				
						f_z (mm)																		
P.1.1	0,9	0,7*	0,6*	175	0,05	0,44	0,31	0,20	0,53	0,37	0,24	0,61	0,43	0,27	0,74	0,52	0,33	0,85	0,60	0,38		○	●	○
P.1.2	0,9	0,7*	0,6*	165	0,05	0,42	0,30	0,19	0,50	0,36	0,22	0,58	0,41	0,26	0,71	0,50	0,32	0,81	0,57	0,36		○	●	○
P.1.3	0,9	0,7*	0,6*	160	0,05	0,40	0,28	0,18	0,48	0,34	0,21	0,55	0,39	0,25	0,67	0,48	0,30	0,77	0,54	0,34		○	●	○
P.1.4	0,9	0,7*	0,6*	150	0,05	0,38	0,27	0,17	0,45	0,32	0,20	0,52	0,37	0,23	0,64	0,45	0,29	0,73	0,52	0,33		○	●	○
P.1.5	0,9	0,7*	0,6*	145	0,05	0,36	0,25	0,16	0,43	0,30	0,19	0,50	0,35	0,22	0,60	0,43	0,27	0,69	0,49	0,31		○	●	○
P.2.1	0,9	0,7*	0,6*	160	0,05	0,44	0,31	0,20	0,53	0,37	0,24	0,61	0,43	0,27	0,74	0,52	0,33	0,85	0,60	0,38		○	●	○
P.2.2	0,9	0,7*	0,6*	145	0,05	0,40	0,28	0,18	0,48	0,34	0,21	0,55	0,39	0,25	0,67	0,48	0,30	0,77	0,54	0,34		○	●	○
P.2.3	0,9	0,7*	0,6*	130	0,05	0,36	0,25	0,16	0,43	0,30	0,19	0,50	0,35	0,22	0,60	0,43	0,27	0,69	0,49	0,31		○	●	○
P.2.4	0,9	0,7*	0,6*	100	0,05	0,33	0,24	0,15	0,40	0,28	0,18	0,46	0,32	0,21	0,56	0,40	0,25	0,64	0,45	0,29		○	●	○
P.3.1	0,9	0,7*	0,6*	95	0,05	0,39	0,27	0,17	0,46	0,33	0,21	0,53	0,38	0,24	0,65	0,46	0,29	0,74	0,53	0,33		●		○
P.3.2	0,9	0,7*	0,6*	85	0,05	0,37	0,26	0,16	0,44	0,31	0,20	0,50	0,36	0,23	0,62	0,44	0,28	0,70	0,50	0,32		●		○
P.3.3	0,9	0,7*	0,6*	80	0,05	0,35	0,24	0,15	0,41	0,29	0,19	0,48	0,34	0,21	0,58	0,41	0,26	0,67	0,47	0,30		●		○
P.4.1	0,9	0,7*	0,6*	65	0,05	0,27	0,19	0,12	0,32	0,23	0,14	0,37	0,26	0,16	0,45	0,32	0,20	0,51	0,36	0,23		●		○
P.4.2	0,9	0,7*	0,6*	65	0,05	0,27	0,19	0,12	0,32	0,23	0,14	0,37	0,26	0,16	0,45	0,32	0,20	0,51	0,36	0,23		●		○
M.1.1	0,9	0,7*	0,6*	45	0,05	0,23	0,16	0,10	0,28	0,20	0,12	0,32	0,23	0,14	0,39	0,28	0,18	0,45	0,32	0,20		●		
M.2.1	0,9	0,7*	0,6*	40	0,05	0,19	0,14	0,09	0,23	0,16	0,10	0,27	0,19	0,12	0,32	0,23	0,15	0,37	0,26	0,17		●		
M.3.1	0,9	0,7*	0,6*	45	0,05	0,20	0,14	0,09	0,24	0,17	0,11	0,28	0,19	0,12	0,34	0,24	0,15	0,38	0,27	0,17		●		
K.1.1	0,9	0,7*	0,6*	175	0,05	0,67	0,47	0,30	0,80	0,56	0,36	0,92	0,65	0,41	1,12	0,79	0,50	1,28	0,91	0,57			●	
K.1.2	0,9	0,7*	0,6*	130	0,05	0,47	0,33	0,21	0,56	0,39	0,25	0,64	0,45	0,29	0,78	0,55	0,35	0,90	0,63	0,40			●	
K.2.1	0,9	0,7*	0,6*	160	0,05	0,57	0,40	0,25	0,68	0,48	0,30	0,78	0,55	0,35	0,95	0,67	0,43	1,09	0,77	0,49			●	
K.2.2	0,9	0,7*	0,6*	130	0,05	0,47	0,33	0,21	0,56	0,39	0,25	0,64	0,45	0,29	0,78	0,55	0,35	0,90	0,63	0,40			●	
K.3.1	0,9	0,7*	0,6*	115	0,05	0,47	0,33	0,21	0,56	0,39	0,25	0,64	0,45	0,29	0,78	0,55	0,35	0,90	0,63	0,40			●	
K.3.2	0,9	0,7*	0,6*	110	0,05	0,40	0,28	0,18	0,48	0,34	0,21	0,55	0,39	0,25	0,67	0,48	0,30	0,77	0,54	0,34			●	
N.1.1																								
N.1.2																								
N.2.1																								
N.2.2																								
N.2.3																								
N.3.1																								
N.3.2																								
N.3.3																								
N.4.1																								
S.1.1																								
S.1.2																								
S.2.1																								
S.2.2																								
S.2.3																								
S.3.1																								
S.3.2																								
S.3.3																								
H.1.1																								
H.1.2																								
H.1.3																								
H.1.4																								
H.2.1																								
H.3.1																								
O.1.1																								
O.1.2																								
O.2.1																								
O.2.2																								
O.3.1																								

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Finishing milling heads

Index	52 863 ...									● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder Ø DC (mm) = 8 $a_{p\,max.}$ = 7,5 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 10 $a_{p\,max.}$ = 9,4 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 12 $a_{p\,max.}$ = 11,3 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 16 $a_{p\,max.}$ = 15,0 a_e x DC = 0,1–0,2 f_z (mm)	Ø DC (mm) = 20 $a_{p\,max.}$ = 18,8 a_e x DC = 0,1–0,2 f_z (mm)	Emulsion	Compressed air	MMS
P.1.1	0,9	0,7*	0,6*	405	0,04	0,05	0,06	0,08	0,09	○	●	○
P.1.2	0,9	0,7*	0,6*	385	0,04	0,05	0,06	0,07	0,08	○	●	○
P.1.3	0,9	0,7*	0,6*	365	0,04	0,05	0,06	0,07	0,08	○	●	○
P.1.4	0,9	0,7*	0,6*	350	0,04	0,05	0,05	0,06	0,07	○	●	○
P.1.5	0,9	0,7*	0,6*	330	0,04	0,04	0,05	0,06	0,07	○	●	○
P.2.1	0,9	0,7*	0,6*	365	0,04	0,05	0,06	0,08	0,09	○	●	○
P.2.2	0,9	0,7*	0,6*	335	0,04	0,05	0,06	0,07	0,08	○	●	○
P.2.3	0,9	0,7*	0,6*	300	0,04	0,04	0,05	0,06	0,07	○	●	○
P.2.4	0,9	0,7*	0,6*	235	0,03	0,04	0,05	0,06	0,06	○	●	○
P.3.1	0,9	0,7*	0,6*	215	0,04	0,05	0,05	0,07	0,08	●		○
P.3.2	0,9	0,7*	0,6*	200	0,04	0,04	0,05	0,06	0,07	●		○
P.3.3	0,9	0,7*	0,6*	185	0,04	0,04	0,05	0,06	0,07	●		○
P.4.1	0,9	0,7*	0,6*	150	0,03	0,03	0,04	0,05	0,05	●		○
P.4.2	0,9	0,7*	0,6*	150	0,03	0,03	0,04	0,05	0,05	●		○
M.1.1	0,9	0,7*	0,6*	100	0,02	0,03	0,03	0,04	0,05	●		
M.2.1	0,9	0,7*	0,6*	95	0,02	0,02	0,03	0,03	0,04	●		
M.3.1	0,9	0,7*	0,6*	100	0,02	0,02	0,03	0,03	0,04	●		
K.1.1	0,9	0,7*	0,6*	400	0,07	0,08	0,09	0,11	0,13		●	
K.1.2	0,9	0,7*	0,6*	300	0,05	0,06	0,07	0,08	0,09		●	
K.2.1	0,9	0,7*	0,6*	365	0,06	0,07	0,08	0,10	0,11		●	
K.2.2	0,9	0,7*	0,6*	300	0,05	0,06	0,07	0,08	0,09		●	
K.3.1	0,9	0,7*	0,6*	265	0,05	0,06	0,07	0,08	0,09		●	
K.3.2	0,9	0,7*	0,6*	250	0,04	0,05	0,06	0,07	0,08		●	
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – Radius torus cutters

Index	52 865 ..., 52 866 ...																		● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder														Emulsion	Compressed air	MMS
					Ø DC (mm) =																
					8			10			12			16			20				
					$a_{p\,max.}$ =																
					4,8	1,6	0,8	5,6	2,0	1,0	6,8	2,4	1,2	9,0	3,2	1,6	11,3	4,0	2,0		
					a_e x DC =																
					0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0	0,1–0,2	0,3–0,4	0,6–1,0		
					f_z (mm)																
P.1.1	0,9	0,7*	0,6*	110	0,027	0,025	0,018	0,032	0,030	0,022	0,037	0,034	0,025	0,045	0,042	0,031	0,051	0,048	0,035	○	●	○
P.1.2	0,9	0,7*	0,6*	105	0,025	0,024	0,017	0,030	0,028	0,021	0,035	0,032	0,024	0,043	0,040	0,029	0,049	0,045	0,033	○	●	○
P.1.3	0,9	0,7*	0,6*	100	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032	○	●	○
P.1.4	0,9	0,7*	0,6*	95	0,023	0,021	0,016	0,027	0,026	0,019	0,032	0,029	0,022	0,039	0,036	0,026	0,044	0,041	0,030	○	●	○
P.1.5	0,9	0,7*	0,6*	90	0,022	0,020	0,015	0,026	0,024	0,018	0,030	0,028	0,020	0,037	0,034	0,025	0,042	0,039	0,029	○	●	○
P.2.1	0,9	0,7*	0,6*	100	0,027	0,025	0,018	0,032	0,030	0,022	0,037	0,034	0,025	0,045	0,042	0,031	0,051	0,048	0,035	○	●	○
P.2.2	0,9	0,7*	0,6*	90	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032	○	●	○
P.2.3	0,9	0,7*	0,6*	80	0,022	0,020	0,015	0,026	0,024	0,018	0,030	0,028	0,020	0,037	0,034	0,025	0,042	0,039	0,029	○	●	○
P.2.4	0,9	0,7*	0,6*	65	0,020	0,019	0,014	0,024	0,022	0,016	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,026	○	●	○
P.3.1	0,9	0,7*	0,6*	60	0,023	0,022	0,016	0,028	0,026	0,019	0,032	0,030	0,022	0,039	0,037	0,027	0,045	0,042	0,031	●		○
P.3.2	0,9	0,7*	0,6*	55	0,022	0,021	0,015	0,026	0,025	0,018	0,030	0,028	0,021	0,037	0,035	0,025	0,043	0,040	0,029	●		○
P.3.3	0,9	0,7*	0,6*	50	0,021	0,019	0,014	0,025	0,023	0,017	0,029	0,027	0,020	0,035	0,033	0,024	0,040	0,037	0,028	●		○
P.4.1	0,9	0,7*	0,6*	40	0,016	0,015	0,011	0,019	0,018	0,013	0,022	0,021	0,015	0,027	0,025	0,019	0,031	0,029	0,021	●		○
P.4.2	0,9	0,7*	0,6*	40	0,016	0,015	0,011	0,019	0,018	0,013	0,022	0,021	0,015	0,027	0,025	0,019	0,031	0,029	0,021	●		○
M.1.1	0,9	0,7*	0,6*	27	0,014	0,013	0,010	0,017	0,016	0,012	0,019	0,018	0,013	0,024	0,022	0,016	0,027	0,025	0,019	●		
M.2.1	0,9	0,7*	0,6*	25	0,012	0,011	0,008	0,014	0,013	0,010	0,016	0,015	0,011	0,020	0,018	0,013	0,022	0,021	0,015	●		
M.3.1	0,9	0,7*	0,6*	27	0,012	0,011	0,008	0,014	0,013	0,010	0,017	0,015	0,011	0,020	0,019	0,014	0,023	0,022	0,016	●		
K.1.1	0,9	0,7*	0,6*	110	0,040	0,037	0,028	0,048	0,045	0,033	0,055	0,052	0,038	0,068	0,063	0,046	0,077	0,072	0,053		●	
K.1.2	0,9	0,7*	0,6*	80	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.2.1	0,9	0,7*	0,6*	100	0,034	0,032	0,023	0,041	0,038	0,028	0,047	0,044	0,032	0,057	0,054	0,039	0,066	0,061	0,045		●	
K.2.2	0,9	0,7*	0,6*	80	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.3.1	0,9	0,7*	0,6*	70	0,028	0,026	0,019	0,034	0,031	0,023	0,039	0,036	0,027	0,047	0,044	0,032	0,054	0,050	0,037		●	
K.3.2	0,9	0,7*	0,6*	70	0,024	0,022	0,017	0,029	0,027	0,020	0,033	0,031	0,023	0,041	0,038	0,028	0,046	0,043	0,032		●	
N.1.1	0,9	0,7*	0,6*	420	0,045	0,042	0,031	0,054	0,050	0,037	0,062	0,058	0,042	0,076	0,071	0,052	0,087	0,081	0,059	●		○
N.1.2	0,9	0,7*	0,6*	380	0,041	0,038	0,028	0,049	0,046	0,034	0,056	0,053	0,039	0,069	0,064	0,047	0,079	0,073	0,054	●		○
N.2.1	0,9	0,7*	0,6*	255	0,043	0,040	0,029	0,052	0,048	0,035	0,059	0,055	0,041	0,072	0,067	0,050	0,083	0,077	0,057	●		○
N.2.2	0,9	0,7*	0,6*	205	0,045	0,042	0,031	0,054	0,050	0,037	0,062	0,058	0,042	0,076	0,071	0,052	0,087	0,081	0,059	●		○
N.2.3	0,9	0,7*	0,6*	145	0,049	0,046	0,034	0,059	0,055	0,040	0,068	0,063	0,046	0,083	0,077	0,057	0,095	0,088	0,065	●		○
N.3.1	0,9	0,7*	0,6*	185	0,020	0,019	0,014	0,025	0,023	0,017	0,028	0,026	0,019	0,034	0,032	0,024	0,039	0,037	0,027	●		○
N.3.2	0,9	0,7*	0,6*	110	0,033	0,031	0,022	0,039	0,037	0,027	0,045	0,042	0,031	0,055	0,051	0,038	0,063	0,059	0,043	●		○
N.3.3	0,9	0,7*	0,6*	145	0,033	0,031	0,022	0,039	0,037	0,027	0,045	0,042	0,031	0,055	0,051	0,038	0,063	0,059	0,043	●		○
N.4.1																						
S.1.1																						
S.1.2																						
S.2.1																						
S.2.2																						
S.2.3																						
S.3.1																						
S.3.2																						
S.3.3																						
H.1.1																						
H.1.2																						
H.1.3																						
H.1.4																						
H.2.1																						
H.3.1																						
O.1.1																						
O.1.2																						
O.2.1																						
O.2.2																						
O.3.1																						

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Radius torus cutters – HSC machining

Index	52 865 ..., 52 866 ...									● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder Ø DC (mm) = 8	10	12	16	20	Emulsion	Compressed air	MMS
					a_e/a_p = 0,04	0,05	0,06	0,08	0,10			
					f_z (mm)							
P.1.1	0,9	0,7*	0,6*	385	0,11	0,11	0,11	0,11	0,11	○	●	○
P.1.2	0,9	0,7*	0,6*	365	0,10	0,11	0,11	0,11	0,11	○	●	○
P.1.3	0,9	0,7*	0,6*	350	0,10	0,10	0,10	0,10	0,10	○	●	○
P.1.4	0,9	0,7*	0,6*	330	0,09	0,10	0,10	0,10	0,10	○	●	○
P.1.5	0,9	0,7*	0,6*	315	0,09	0,09	0,09	0,09	0,09	○	●	○
P.2.1	0,9	0,7*	0,6*	350	0,11	0,11	0,11	0,11	0,11	○	●	○
P.2.2	0,9	0,7*	0,6*	315	0,10	0,10	0,10	0,10	0,10	○	●	○
P.2.3	0,9	0,7*	0,6*	285	0,09	0,09	0,09	0,09	0,09	○	●	○
P.2.4	0,9	0,7*	0,6*	220	0,08	0,08	0,09	0,09	0,08	○	●	○
P.3.1	0,9	0,7*	0,6*	205	0,09	0,10	0,10	0,10	0,10	●		○
P.3.2	0,9	0,7*	0,6*	190	0,09	0,09	0,09	0,09	0,09	●		○
P.3.3	0,9	0,7*	0,6*	175	0,08	0,09	0,09	0,09	0,09	●		○
P.4.1	0,9	0,7*	0,6*	140	0,07	0,07	0,07	0,07	0,07	●		○
P.4.2	0,9	0,7*	0,6*	140	0,07	0,07	0,07	0,07	0,07	●		○
M.1.1	0,9	0,7*	0,6*	95	0,06	0,06	0,06	0,06	0,06	●		
M.2.1	0,9	0,7*	0,6*	90	0,05	0,05	0,05	0,05	0,05	●		
M.3.1	0,9	0,7*	0,6*	95	0,05	0,05	0,05	0,05	0,05	●		
K.1.1	0,9	0,7*	0,6*	380	0,16	0,17	0,17	0,17	0,17		●	
K.1.2	0,9	0,7*	0,6*	285	0,11	0,12	0,12	0,12	0,12		●	
K.2.1	0,9	0,7*	0,6*	350	0,14	0,14	0,14	0,15	0,14		●	
K.2.2	0,9	0,7*	0,6*	285	0,11	0,12	0,12	0,12	0,12		●	
K.3.1	0,9	0,7*	0,6*	255	0,11	0,12	0,12	0,12	0,12		●	
K.3.2	0,9	0,7*	0,6*	235	0,10	0,10	0,10	0,10	0,10		●	
N.1.1	0,9	0,7*	0,6*	840	0,18	0,19	0,19	0,19	0,19	●		○
N.1.2	0,9	0,7*	0,6*	765	0,17	0,17	0,17	0,17	0,17	●		○
N.2.1	0,9	0,7*	0,6*	510	0,17	0,18	0,18	0,18	0,18	●		○
N.2.2	0,9	0,7*	0,6*	405	0,18	0,19	0,19	0,19	0,19	●		○
N.2.3	0,9	0,7*	0,6*	290	0,20	0,21	0,21	0,21	0,20	●		○
N.3.1	0,9	0,7*	0,6*	365	0,08	0,09	0,09	0,09	0,09	●		○
N.3.2	0,9	0,7*	0,6*	220	0,13	0,14	0,14	0,14	0,14	●		○
N.3.3	0,9	0,7*	0,6*	290	0,13	0,14	0,14	0,14	0,14	●		○
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1				150	0,083	0,086	0,087	0,087	0,085	●		
O.1.2				100	0,083	0,086	0,087	0,087	0,085	●		
O.2.1												
O.2.2												
O.3.1												

* = Trimming and trochoidal slot milling

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – Torus cutter heads

Index	52 870 ...												● 1st choice ○ suitable		
	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	Feedrates for extra short and short holder Ø DC (mm) = 10		12		16		20		Emulsion	Compressed air	MMS
					$a_{p\,max.}$ = 5,0	3,0	6,0	3,6	8,0	4,8	10,0	6,0			
					a_e x DC										
					f_z (mm)										
P.1.1															
P.1.2															
P.1.3															
P.1.4															
P.1.5															
P.2.1															
P.2.2															
P.2.3															
P.2.4															
P.3.1															
P.3.2															
P.3.3															
P.4.1															
P.4.2															
M.1.1															
M.2.1															
M.3.1															
K.1.1															
K.1.2															
K.2.1															
K.2.2															
K.3.1															
K.3.2															
N.1.1	0,9	0,7	0,6	840	0,187	0,216	0,215	0,248	0,263	0,303	0,301	0,346	●		
N.1.2	0,9	0,7	0,6	765	0,170	0,196	0,196	0,225	0,239	0,275	0,273	0,315	●		
N.2.1	0,9	0,7	0,6	510	0,179	0,206	0,206	0,237	0,251	0,289	0,287	0,331	●		
N.2.2	0,9	0,7	0,6	405	0,187	0,216	0,215	0,248	0,263	0,303	0,301	0,346	●		
N.2.3	0,9	0,7	0,6	295	0,204	0,235	0,235	0,271	0,287	0,331	0,328	0,378	●		
N.3.1															
N.3.2															
N.3.3															
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

For unstable applications, the cutting data can be reduced.

Cutting data standard values – MultiChange – Quarter-round cutter heads

Index	v_c (m/min)	52 869 ... Ø DCX (mm) = 8 PRFRAD = 0,5	8 1,0	10 1,5	10 2,0	12 2,5	12 3,0	12 3,5	16 4,0	16 4,5	20 5,0	20 5,0	20 6,0	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)														
P.1.1	150	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08	○	●	○
P.1.2	170	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	○	●	○
P.1.3	130	0,03	0,04	0,03	0,05	0,05	0,04	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.1.4	120	0,03	0,04	0,03	0,05	0,05	0,04	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.1.5	170	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	○	●	○
P.2.1	130	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07	○	●	○
P.2.2	130	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07	○	●	○
P.2.3	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.2.4	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08	○	●	○
P.3.1	80	0,02	0,02	0,03	0,02	0,03	0,03	0,03	0,05	0,05	0,04	0,06	0,06	○	●	○
P.3.2	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
P.3.3	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
P.4.1	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
P.4.2	70	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	○	●	○
M.1.1	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
M.2.1	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
M.3.1	40	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		
K.1.1	130	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09		●	
K.1.2	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,07	0,07	0,06	0,08	0,08		●	
K.2.1	120	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
K.2.2	100	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07		●	
K.3.1	100	0,03	0,03	0,04	0,03	0,05	0,05	0,04	0,08	0,07	0,07	0,09	0,08		●	
K.3.2	90	0,03	0,02	0,03	0,03	0,05	0,04	0,04	0,06	0,06	0,05	0,07	0,07		●	
N.1.1	430	0,05	0,04	0,06	0,05	0,09	0,08	0,07	0,12	0,11	0,1	0,14	0,13	●		○
N.1.2	380	0,05	0,04	0,06	0,05	0,09	0,08	0,07	0,12	0,11	0,1	0,14	0,13	●		○
N.2.1	260	0,05	0,04	0,05	0,05	0,08	0,07	0,06	0,11	0,1	0,09	0,12	0,12	●		○
N.2.2	320	0,05	0,04	0,06	0,05	0,08	0,07	0,07	0,11	0,11	0,1	0,13	0,12	●		○
N.2.3	130	0,04	0,03	0,05	0,04	0,07	0,06	0,05	0,1	0,09	0,08	0,11	0,1	●		○
N.3.1	190	0,03	0,03	0,04	0,04	0,06	0,05	0,05	0,08	0,08	0,07	0,09	0,09	●		○
N.3.2	170	0,02	0,02	0,02	0,02	0,03	0,03	0,03	0,04	0,04	0,04	0,05	0,05	●		○
N.3.3	140	0,02	0,02	0,02	0,02	0,03	0,03	0,02	0,04	0,04	0,04	0,05	0,05	●		○
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

For unstable applications, the cutting data can be reduced.

14

Cutting data standard values – MultiChange – Deburring milling heads

Index	Correction factor f_z and v_c Medium Holder	Correction factor f_z and v_c Long Holder	Correction factor f_z and v_c Extra Long Holder	v_c (m/min)	52 867 ...				52 868 ...				● 1st choice ○ suitable		
					Feedrates for extra short and short holder										
					Ø DCX (mm) =				Ø DCX (mm) =						
					10	12	16	20	10	12	16	20			
					$a_{p\,max.}$ (mm) =				$a_{p\,max.}$ (mm) =						
					5,0	6,0	4,8	6,0	1,25	1,5	2,0	2,5			
					a_e 0,1– 0,2 x DCX				a_e 0,1– 0,2 x DCX						
					f_z (mm)								Emulsion	Compressed air	MMS
P.1.1	0,9	0,7	0,6	200	0,06	0,07	0,08	0,09	0,06	0,07	0,08	0,09	○	●	○
P.1.2	0,9	0,7	0,6	190	0,06	0,06	0,08	0,09	0,06	0,06	0,08	0,09	○	●	○
P.1.3	0,9	0,7	0,6	185	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	○	●	○
P.1.4	0,9	0,7	0,6	175	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	○	●	○
P.1.5	0,9	0,7	0,6	165	0,05	0,05	0,07	0,08	0,05	0,05	0,07	0,08	○	●	○
P.2.1	0,9	0,7	0,6	185	0,06	0,07	0,08	0,09	0,06	0,07	0,08	0,09	○	●	○
P.2.2	0,9	0,7	0,6	165	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	○	●	○
P.2.3	0,9	0,7	0,6	150	0,05	0,05	0,07	0,08	0,05	0,05	0,07	0,08	○	●	○
P.2.4	0,9	0,7	0,6	115	0,04	0,05	0,06	0,07	0,04	0,05	0,06	0,07	○	●	○
P.3.1	0,9	0,7	0,6	110	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	●		○
P.3.2	0,9	0,7	0,6	100	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08	●		○
P.3.3	0,9	0,7	0,6	90	0,05	0,05	0,06	0,07	0,05	0,05	0,06	0,07	●		○
P.4.1	0,9	0,7	0,6	75	0,04	0,04	0,05	0,06	0,04	0,04	0,05	0,06	●		○
P.4.2	0,9	0,7	0,6	75	0,04	0,04	0,05	0,06	0,04	0,04	0,05	0,06	●		○
M.1.1	0,9	0,7	0,6	50	0,03	0,04	0,04	0,05	0,03	0,04	0,04	0,05	●		
M.2.1	0,9	0,7	0,6	45	0,03	0,03	0,04	0,04	0,03	0,03	0,04	0,04	●		
M.3.1	0,9	0,7	0,6	50	0,03	0,03	0,04	0,04	0,03	0,03	0,04	0,04	●		
K.1.1	0,9	0,7	0,6	200	0,09	0,10	0,12	0,14	0,09	0,10	0,12	0,14		●	
K.1.2	0,9	0,7	0,6	150	0,06	0,07	0,09	0,10	0,06	0,07	0,09	0,10		●	
K.2.1	0,9	0,7	0,6	185	0,07	0,09	0,11	0,12	0,07	0,09	0,11	0,12		●	
K.2.2	0,9	0,7	0,6	150	0,06	0,07	0,09	0,10	0,06	0,07	0,09	0,10		●	
K.3.1	0,9	0,7	0,6	135	0,06	0,07	0,09	0,10	0,06	0,07	0,09	0,10		●	
K.3.2	0,9	0,7	0,6	125	0,05	0,06	0,07	0,08	0,05	0,06	0,07	0,08		●	
N.1.1	0,9	0,7	0,6	550	0,10	0,11	0,14	0,16	0,10	0,11	0,14	0,16	●		○
N.1.2	0,9	0,7	0,6	500	0,09	0,10	0,13	0,14	0,09	0,10	0,13	0,14	●		○
N.2.1	0,9	0,7	0,6	330	0,09	0,11	0,13	0,15	0,09	0,11	0,13	0,15	●		○
N.2.2	0,9	0,7	0,6	265	0,10	0,11	0,14	0,16	0,10	0,11	0,14	0,16	●		○
N.2.3	0,9	0,7	0,6	190	0,11	0,12	0,15	0,17	0,11	0,12	0,15	0,17	●		○
N.3.1	0,9	0,7	0,6	240	0,04	0,05	0,06	0,07	0,04	0,05	0,06	0,07	●		○
N.3.2	0,9	0,7	0,6	145	0,07	0,08	0,10	0,12	0,07	0,08	0,10	0,12	●		○
N.3.3	0,9	0,7	0,6	190	0,07	0,08	0,10	0,12	0,07	0,08	0,10	0,12	●		○
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

For unstable applications the machining parameters must be reduced.

Cutting data standard values – T-slot milling cutter

Index	v_c (m/min)	54 065 ... Ø DC (mm) = 11,0	12,5	16,0	18,0	19,0	21,0	22,0	25,0	28,0	32,0	36,0	40,0	● 1st choice ○ suitable Emulsion	Compressed air	MMS
		f_z (mm)														
P.1.1	72	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.2	68	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.3	68	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.4	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.1.5	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.1	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.2	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.3	56	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.2.4	56	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.3.1	64	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.3.2	60	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.3.3	52	0,015	0,018	0,021	0,025	0,028	0,030	0,030	0,030	0,035	0,040	0,045	0,050	●		
P.4.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
P.4.2	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
M.1.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
M.2.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
M.3.1	40	0,010	0,012	0,014	0,017	0,019	0,020	0,020	0,020	0,023	0,027	0,030	0,033	●		
K.1.1	68	0,040	0,048	0,056	0,067	0,075	0,080	0,080	0,080	0,093	0,093	0,105	0,117	●		
K.1.2	56	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.2.1	64	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.2.2	52	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.3.1	56	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
K.3.2	54	0,030	0,036	0,042	0,050	0,056	0,060	0,060	0,060	0,070	0,070	0,079	0,088	●		
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The feed f_z must be reduced by 50% until the tool is fully engaged.

14

Cutting data standard values – mini milling cutter, uncoated

Index	Extra-short type		50 608 ..., 50 664 ...															
			Ø DC (mm) =															
			0,5		1,0		1,2		1,5		1,8–2,0		2,5–3,0			3,5–4,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1																		
P.1.2																		
P.1.3																		
P.1.4																		
P.1.5																		
P.2.1																		
P.2.2																		
P.2.3																		
P.2.4																		
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1																		
P.4.2																		
M.1.1																		
M.2.1																		
M.3.1																		
K.1.1																		
K.1.2																		
K.2.1																		
K.2.2																		
K.3.1																		
K.3.2																		
N.1.1	250	1,0	0,007	0,006	0,011	0,009	0,014	0,011	0,018	0,014	0,024	0,019	0,038	0,030	0,019	0,050	0,040	0,025
N.1.2	250	1,0	0,007	0,006	0,011	0,009	0,014	0,011	0,018	0,014	0,024	0,019	0,038	0,030	0,019	0,050	0,040	0,025
N.2.1	180	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
N.2.2	180	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
N.2.3	150	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
N.3.1	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.2	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.3	140	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.4.1	180	1,0	0,009	0,007	0,013	0,010	0,016	0,013	0,020	0,016	0,026	0,021	0,037	0,030	0,019	0,048	0,038	0,024
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1	50	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.2	20	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	50 608 ..., 50 664 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	4,5–5,0			5,5–6,0			6,7–8,0			8,7–10,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1															
P.1.2															
P.1.3															
P.1.4															
P.1.5															
P.2.1															
P.2.2															
P.2.3															
P.2.4															
P.3.1															
P.3.2															
P.3.3															
P.4.1															
P.4.2															
M.1.1															
M.2.1															
M.3.1															
K.1.1															
K.1.2															
K.2.1															
K.2.2															
K.3.1															
K.3.2															
N.1.1	0,064	0,051	0,032	0,077	0,062	0,039	0,104	0,083	0,052	0,130	0,104	0,065	●		○
N.1.2	0,064	0,051	0,032	0,077	0,062	0,039	0,104	0,083	0,052	0,130	0,104	0,065	●		○
N.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
N.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
N.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
N.3.1	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.2	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.3	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.4.1	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	●		○
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – mini milling cutter, coated

Index	Extra-short type		50 609 ..., 50 691 ...															
			Ø DC (mm) =															
			0,5		1,0		1,2		1,5		1,8–2,0		2,5–3,0			3,5–4,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	110	1,0	0,011	0,009	0,014	0,011	0,015	0,012	0,017	0,014	0,020	0,016	0,027	0,022	0,014	0,034	0,027	0,017
P.1.2	90	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.1.3	90	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.1.4	80	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.1.5	80	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.1	90	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.2	70	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.3	70	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.2.4	55	1,0	0,006	0,005	0,008	0,006	0,010	0,008	0,012	0,010	0,015	0,012	0,022	0,018	0,011	0,028	0,022	0,014
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	50	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
P.4.2	40	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
M.1.1	40	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
M.2.1	50	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
M.3.1	50	1,0	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
K.1.1	130	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
K.1.2	120	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
K.2.1	130	1,0	0,017	0,014	0,020	0,016	0,022	0,018	0,024	0,019	0,028	0,022	0,035	0,028	0,018	0,042	0,034	0,021
K.2.2	120	1,0	0,017	0,014	0,020	0,016	0,022	0,018	0,024	0,019	0,028	0,022	0,035	0,028	0,018	0,042	0,034	0,021
K.3.1	130	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
K.3.2	120	1,0	0,018	0,014	0,022	0,018	0,024	0,019	0,028	0,022	0,034	0,027	0,044	0,035	0,022	0,056	0,045	0,028
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.2	200	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.3.3	140	1,0	0,004	0,003	0,008	0,006	0,010	0,008	0,014	0,011	0,018	0,014	0,028	0,022	0,014	0,038	0,030	0,019
N.4.1																		
S.1.1	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.1.2	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.2.1	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.2.2	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.2.3	30	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.1	50	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.2	20	0,5	0,003	0,002	0,005	0,004	0,006	0,005	0,007	0,006	0,010	0,008	0,015	0,012	0,008	0,020	0,016	0,010
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	50 609 ..., 50 691 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	4,5–5,0			5,5–6,0			6,7–8,0			8,7–10,0					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038	○	●	○
P.1.2	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.1.3	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.1.4	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.1.5	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.1	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.2	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.3	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.2.4	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	○	●	○
P.3.1															
P.3.2															
P.3.3															
P.4.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
P.4.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
M.1.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
M.2.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
M.3.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
K.1.1	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
K.1.2	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
K.2.1	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	○	●	○
K.2.2	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	○	●	○
K.3.1	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
K.3.2	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	○	●	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.2	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.3.3	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	●		○
N.4.1															
S.1.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.1.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.2.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.2.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.2.3	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.1	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.2	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	●		○
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – End mill – W version, short

Index	HPC		54 590..., 54 591..., 54 594..., 54 595..., 54 610..., 54 611..., 54 640..., 54 642...																	
			Ø DC (mm) =																	
			2,7–3,0			3,7–4,0			4,7–5,0			5,7–7,0			7,7–9,0			9,7–11,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
N.1.1	560	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.1.2	560	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.2.1	336	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.2.2	336	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.2.3	224	1,0*	0,054	0,042	0,030	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,200	0,150	0,100	0,240	0,180	0,120
N.3.1	224	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,160	0,120	0,080	0,200	0,150	0,100
N.3.2	160	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,160	0,120	0,080	0,200	0,150	0,100
N.3.3	160	1,0*	0,036	0,028	0,020	0,054	0,042	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,160	0,120	0,080	0,200	0,150	0,100
N.4.1																				

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cutting data standard values – End mill – W version, long

Index	HPC		50 960 ..., 54 590 ..., 54 592 ..., 54 591 ..., 54 593 ..., 54 594 ..., 54 595 ..., 54 596 ..., 54 597 ..., 54 610 ..., 54 611 ..., 54 612 ..., 54 613 ..., 54 620 ..., 54 630 ..., 54 631 ..., 54 640 ...																	
			Ø DC (mm) =																	
			2,7–3,0			3,7–4,0			4,7–5,0			5,7–7,0			7,7–9,0			9,7–11,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
N.1.1	320	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.1.2	320	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.2.1	192	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.2.2	192	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.2.3	128	1,0*	0,036	0,028	0,020	0,063	0,049	0,035	0,100	0,075	0,050	0,120	0,089	0,060	0,160	0,120	0,080	0,200	0,150	0,100
N.3.1	128	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,140	0,100	0,070	0,180	0,130	0,090
N.3.2	92	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,140	0,100	0,070	0,180	0,130	0,090
N.3.3	92	1,0*	0,027	0,021	0,015	0,045	0,035	0,025	0,070	0,052	0,035	0,100	0,075	0,050	0,140	0,100	0,070	0,180	0,130	0,090
N.4.1																				

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cutting data standard values – End mill – W and WR version, extra long

Index	HPC		54 590 ..., 54 592 ..., 54 610 ..., 54 612 ..., 54 630 ..., 54 631 ..., 54 632 ..., 54 633 ..., 54 650 ..., 54 640 ..., 54 642 ...																	
			Ø DC (mm) =																	
			2,7–3,0			3,7–4,0			4,7–5,0			5,7–7,0			7,7–9,0			9,7–11,0		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)																	
N.1.1	240	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.1.2	240	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.2.1	144	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.2.2	144	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.2.3	100	0,750*	0,013	0,010	0,007	0,018	0,014	0,010	0,040	0,030	0,020	0,050	0,037	0,025	0,060	0,050	0,030	0,070	0,050	0,040
N.3.1	100	0,750*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,040	0,030	0,020	0,050	0,040	0,030
N.3.2	72	0,750*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,040	0,030	0,020	0,050	0,040	0,030
N.3.3	72	0,750*	0,009	0,007	0,005	0,014	0,011	0,008	0,020	0,015	0,010	0,030	0,022	0,015	0,040	0,030	0,020	0,050	0,040	0,030
N.4.1																				

* = use a_p 1.5 x DC only in a_e range 0.1–0.4 x DC

Cooling lubrication with emulsion

Feed rate guide values for ball nosed and torus cutters on → **Page** 486

Index	54 590..., 54 591..., 54 594..., 54 595..., 54 610..., 54 611..., 54 640..., 54 642...																		Emulsion	MMS
	Ø DC (mm) =																			
	11,7–13,0			13,7–15,0			15,7–16,0			18,0			19,7–20,0			24,7–25,0				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		
	f_z (mm)																			
N.1.1	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.1.2	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.2.1	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.2.2	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.2.3	0,270	0,220	0,150	0,290	0,230	0,160	0,310	0,240	0,170	0,330	0,250	0,180	0,340	0,270	0,270	0,350	0,280	0,220	●	●
N.3.1	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,240	0,320	0,260	0,200	●	●
N.3.2	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,240	0,320	0,260	0,200	●	●
N.3.3	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,240	0,320	0,260	0,200	●	●
N.4.1																				

Index	50 960 ..., 54 590 ..., 54 592 ..., 54 591 ..., 54 593 ..., 54 594 ..., 54 595 ..., 54 596 ..., 54 597 ..., 54 610 ..., 54 611 ..., 54 612 ..., 54 613 ..., 54 620 ..., 54 630 ..., 54 631 ..., 54 640 ...																		Emulsion	MMS
	Ø DC (mm) =																			
	11,7–13,0			13,7–15,0			15,7–16,0			18,0			19,7–20,0			24,7–25,0				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		
	f_z (mm)																			
N.1.1	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.1.2	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.2.1	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.2.2	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.2.3	0,220	0,170	0,120	0,240	0,180	0,130	0,250	0,200	0,140	0,270	0,210	0,150	0,300	0,240	0,170	0,320	0,260	0,200	●	●
N.3.1	0,200	0,160	0,110	0,220	0,170	0,120	0,230	0,180	0,130	0,260	0,200	0,140	0,260	0,210	0,150	0,290	0,230	0,180	●	●
N.3.2	0,200	0,160	0,110	0,220	0,170	0,120	0,230	0,180	0,130	0,260	0,200	0,140	0,260	0,210	0,150	0,290	0,230	0,180	●	●
N.3.3	0,200	0,160	0,110	0,220	0,170	0,120	0,230	0,180	0,130	0,260	0,200	0,140	0,260	0,210	0,150	0,290	0,230	0,180	●	●
N.4.1																				

Index	54 590 ..., 54 592 ..., 54 610 ..., 54 612 ..., 54 630 ..., 54 631 ..., 54 632 ..., 54 633 ..., 54 650 ..., 54 640 ..., 54 642 ...																		Emulsion	MMS
	Ø DC (mm) =																			
	11,7–13,0			13,7–15,0			15,7–16,0			18,0			19,7–20,0			24,7–25,0				
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC		
	f_z (mm)																			
N.1.1	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.1.2	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.2.1	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.2.2	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.2.3	0,080	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,130	0,100	0,080	0,160	0,130	0,100	●	●
N.3.1	0,060	0,050	0,030	0,070	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,140	0,120	0,090	●	●
N.3.2	0,060	0,050	0,030	0,070	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,140	0,120	0,090	●	●
N.3.3	0,060	0,050	0,030	0,070	0,060	0,040	0,090	0,070	0,050	0,100	0,080	0,060	0,110	0,090	0,070	0,140	0,120	0,090	●	●
N.4.1																				

Cutting data standard values – End mill

Index	Type short / long		54 070 ..., 54 071 ..., 54 072 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	210	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.2	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.3	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.4	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.5	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.1	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.2	190	1,0	0,022	0,018	0,011	0,030	0,024	0,015	0,038	0,030	0,019	0,046	0,037	0,023	0,062	0,050	0,031	
P.2.3	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.4	170	1,0	0,022	0,018	0,011	0,030	0,024	0,015	0,038	0,030	0,019	0,046	0,037	0,023	0,062	0,050	0,031	
P.3.1	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.3.2	170	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.3.3	140	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.4.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
P.4.2	80	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.1.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.2.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.3.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
K.1.1	200	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
K.1.2	180	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
K.2.1	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.2.2	170	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.3.1	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.3.2	160	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	350	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.3.2	350	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.3.3	280	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.4.1																		
S.1.1	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.1.2	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.1	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.2	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.3	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.3.1	90	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
S.3.2	50	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	54 070 ..., 54 071 ..., 54 072 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.4	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.5	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.2	0,078	0,062	0,039	0,094	0,075	0,047	0,118	0,094	0,059	0,134	0,107	0,067	●	○	○
P.2.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.4	0,078	0,062	0,039	0,094	0,075	0,047	0,118	0,094	0,059	0,134	0,107	0,067	●	○	○
P.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.4.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.1.2	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.3.2	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.3.3	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.4.1															
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – End mill

Index	Type long		54 078 ...															
			Ø DC (mm) =															
			6			8			10			12			16			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	120	1xDC	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038	0,089	0,071	0,045	0,110	0,088	0,055	
P.1.2	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.1.3	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.1.4	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.1.5	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.1	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.2	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.3	110	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.2.4	95	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.3.1	95	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.3.2	95	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.3.3																		
P.4.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
P.4.2	60	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
M.1.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
M.2.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
M.3.1	70	1xDC	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	
K.1.1	130	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
K.1.2	120	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
K.2.1	130	1xDC	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	
K.2.2	120	1xDC	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	
K.3.1	130	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
K.3.2	130	1xDC	0,078	0,062	0,039	0,100	0,080	0,050	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

At an a_e of < 0.3xDC, an a_p of 3xDC may be used.

Index	54 078 ... Ø DC (mm) = 20 a_e 0,1–0,2 x DC f_z (mm)	a_e 0,3–0,4 x DC f_z (mm)	a_e 0,6–1,0 x DC f_z (mm)	● 1st choice ○ suitable Emulsion	Compressed air	MMS
P.1.1	0,123	0,098	0,062	●	●	○
P.1.2	0,111	0,089	0,056	●	●	○
P.1.3	0,111	0,089	0,056	●	●	○
P.1.4	0,111	0,089	0,056	●	●	○
P.1.5	0,111	0,089	0,056	●	●	○
P.2.1	0,111	0,089	0,056	●	●	○
P.2.2	0,111	0,089	0,056	●	●	○
P.2.3	0,111	0,089	0,056	●	●	○
P.2.4	0,111	0,089	0,056	●	●	○
P.3.1	0,111	0,089	0,056	●	●	○
P.3.2	0,111	0,089	0,056	●	●	○
P.3.3						
P.4.1	0,111	0,089	0,056	●		
P.4.2	0,111	0,089	0,056	●		
M.1.1	0,111	0,089	0,056	●		
M.2.1	0,111	0,089	0,056	●		
M.3.1	0,111	0,089	0,056	●		
K.1.1	0,200	0,160	0,100		●	●
K.1.2	0,200	0,160	0,100		●	●
K.2.1	0,139	0,111	0,070		●	●
K.2.2	0,139	0,111	0,070		●	●
K.3.1	0,200	0,160	0,100		●	●
K.3.2	0,200	0,160	0,100		●	●
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

Cutting data standard values – End mill

Index	Type extra long		54 070 ..., 54 071 ..., 54 072 ...														
			Ø DC (mm) =														
			3			4			5			6			8		
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)														
P.1.1	120	0,8	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031
P.1.2	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.3	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.4	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.5	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.1	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.2	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.3	110	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.4	95	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.3.1	95	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.3.2	95	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.3.3																	
P.4.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.4.2	60	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
M.1.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
M.2.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
M.3.1	70	0,8	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
K.1.1	130	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
K.1.2	120	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
K.2.1	130	0,8	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036
K.2.2	120	0,8	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036
K.3.1	130	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
K.3.2	130	0,8	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
N.1.1																	
N.1.2																	
N.2.1																	
N.2.2																	
N.2.3																	
N.3.1																	
N.3.2																	
N.3.3																	
N.4.1																	
S.1.1																	
S.1.2																	
S.2.1																	
S.2.2																	
S.2.3																	
S.3.1																	
S.3.2																	
S.3.3																	
H.1.1																	
H.1.2																	
H.1.3																	
H.1.4																	
H.2.1																	
H.3.1																	
O.1.1																	
O.1.2																	
O.2.1																	
O.2.2																	
O.3.1																	

Plunging angle for ramping and helical milling: 3°

Index	54 070 ..., 54 071 ..., 54 072 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,075	0,060	0,038	0,089	0,071	0,045	0,110	0,088	0,055	0,123	0,098	0,062	●	○	○
P.1.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.5	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.3															
P.4.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
P.4.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
M.1.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
M.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
M.3.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●		
K.1.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.1.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.2.1	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.2.2	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.3.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.3.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1															
N.3.2															
N.3.3															
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

Cutting data standard values – Finish milling cutter

Index	Type long	Type extra long	Type long / extra long	54 075 ..., 54 076 ...						● 1st choice ○ suitable		
				Ø DC (mm) =								
				6	8	10	12	16	20			
				a_e 0,05 x DC								
	v_c (m/min)		$a_{p\,max}$ x DC	f_z (mm)						Emulsion	Compressed air	MMS
P.1.1	210	145	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.2	200	140	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.3	200	140	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.4	185	130	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.1.5	185	130	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.1	200	140	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.2	185	130	2,0	0,021	0,028	0,035	0,042	0,053	0,060	●	○	○
P.2.3	175	125	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.2.4	170	115	2,0	0,021	0,028	0,035	0,042	0,053	0,060	●	○	○
P.3.1	180	125	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.3.2	170	115	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.3.3	140	95	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
P.4.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
P.4.2	80	60	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
M.1.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
M.2.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
M.3.1	95	65	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
K.1.1	200	140	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
K.1.2	175	125	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
K.2.1	185	130	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
K.2.2	170	115	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
K.3.1	175	125	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
K.3.2	160	110	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●	○	○
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	345	240	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
N.3.2	345	240	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
N.3.3	280	196	2,0	0,032	0,042	0,052	0,063	0,078	0,088	●	○	○
N.4.1												
S.1.1	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.1.2	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.2.1	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.2.2	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.2.3	35	25	2,0	0,014	0,018	0,023	0,027	0,034	0,038	●		
S.3.1	160	110	2,0	0,027	0,036	0,045	0,054	0,068	0,077	●		
S.3.2	100	70	2,0	0,017	0,023	0,030	0,036	0,045	0,052	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Plunging angle for ramping and helical milling = 1°

Cutting data standard values – Circular saw blades

Index	54 700 ... / 54 701 ...	
	Circular saws	
	Solid carbide Fine	
	v_c (m/min)	f_z (mm)
P.1.1	80–140	0,002–0,012
P.1.2	50–80	0,001–0,012
P.1.3	50–80	0,001–0,012
P.1.4	50–80	0,001–0,012
P.1.5	50–80	0,001–0,012
P.2.1	50–80	0,001–0,012
P.2.2	50–80	0,001–0,012
P.2.3	50–80	0,001–0,012
P.2.4	50–80	0,001–0,012
P.3.1	50–80	0,001–0,012
P.3.2	50–80	0,001–0,012
P.3.3	50–80	0,001–0,012
P.4.1	80–120	0,001–0,012
P.4.2	50–80	0,001–0,012
M.1.1	50–80	0,001–0,012
M.2.1	50–80	0,001–0,012
M.3.1	50–80	0,001–0,012
K.1.1	80–140	0,002–0,012
K.1.2	50–80	0,001–0,010
K.2.1	50–80	0,001–0,010
K.2.2	50–80	0,001–0,010
K.3.1	50–80	0,001–0,010
K.3.2	50–80	0,001–0,010
N.1.1	200–500	0,003–0,012
N.1.2	200–500	0,003–0,012
N.2.1	200–450	0,003–0,012
N.2.2	200–450	0,003–0,012
N.2.3	200–450	0,003–0,012
N.3.1	200–450	0,003–0,012
N.3.2	200–450	0,003–0,012
N.3.3	200–450	0,003–0,012
N.4.1		
S.1.1	20–30	0,001–0,012
S.1.2	20–30	0,001–0,012
S.2.1	20–30	0,001–0,012
S.2.2	20–30	0,001–0,012
S.2.3	20–30	0,001–0,012
S.3.1	30–70	0,001–0,012
S.3.2	30–70	0,001–0,012
S.3.3	30–70	0,001–0,012
H.1.1		
H.1.2		
H.1.3		
H.1.4		
H.2.1		
H.3.1		
O.1.1	130–200	0,003–0,015
O.1.2	130–200	0,003–0,015
O.2.1		
O.2.2		
O.3.1		

14

The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type. The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting data standard values – NTR roughing-finishing milling cutter

Index	a_s 0,1–0,4 x DC	a_s 0,6–1,0 x DC	$a_{p\,max}$ in mm	52 318 ...															
				Ø DC (mm) =															
				6			8			10			12			14			
				a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)			f_z (mm)															
P.1.1	250	140	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.1.2	250	140	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.1.3	205	115	1xDC	0,069	0,044	0,026	0,089	0,056	0,033	0,106	0,067	0,040	0,122	0,077	0,046	0,135	0,086	0,051	
P.1.4	205	115	1xDC	0,069	0,044	0,026	0,089	0,056	0,033	0,106	0,067	0,040	0,122	0,077	0,046	0,135	0,086	0,051	
P.1.5	205	115	1xDC	0,069	0,044	0,026	0,089	0,056	0,033	0,106	0,067	0,040	0,122	0,077	0,046	0,135	0,086	0,051	
P.2.1	225	125	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.2.2	225	125	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
P.2.3	135	75	1xDC	0,068	0,043	0,025	0,087	0,055	0,033	0,104	0,066	0,039	0,120	0,076	0,045	0,133	0,085	0,055	
P.2.4	135	75	1xDC	0,068	0,043	0,025	0,087	0,055	0,033	0,104	0,066	0,039	0,120	0,076	0,045	0,133	0,085	0,050	
P.3.1	145	85	1xDC	0,072	0,045	0,027	0,092	0,058	0,034	0,110	0,070	0,041	0,127	0,080	0,047	0,141	0,089	0,053	
P.3.2	125	70	1xDC	0,064	0,041	0,024	0,082	0,052	0,031	0,099	0,062	0,037	0,113	0,072	0,042	0,126	0,080	0,047	
P.3.3	125	70	1xDC	0,064	0,041	0,024	0,082	0,052	0,031	0,099	0,062	0,037	0,113	0,072	0,042	0,126	0,080	0,047	
P.4.1	100	55	1xDC	0,050	0,031	0,018	0,063	0,040	0,024	0,076	0,048	0,028	0,087	0,055	0,033	0,097	0,061	0,037	
P.4.2	100	55	1xDC	0,050	0,031	0,018	0,063	0,040	0,024	0,076	0,048	0,028	0,087	0,055	0,033	0,097	0,061	0,037	
M.1.1	75	40	1xDC	0,043	0,027	0,016	0,055	0,035	0,021	0,066	0,042	0,025	0,076	0,048	0,028	0,084	0,054	0,032	
M.2.1	85	40	1xDC	0,047	0,030	0,018	0,060	0,038	0,022	0,072	0,046	0,027	0,083	0,052	0,031	0,092	0,058	0,035	
M.3.1	70	35	1xDC	0,036	0,023	0,013	0,046	0,029	0,017	0,055	0,035	0,021	0,063	0,040	0,024	0,070	0,045	0,027	
K.1.1	310	150	1xDC	0,124	0,078	0,046	0,158	0,100	0,059	0,190	0,120	0,071	0,218	0,138	0,081	0,242	0,154	0,090	
K.1.2	260	100	1xDC	0,100	0,060	0,026	0,138	0,080	0,039	0,160	0,100	0,051	0,188	0,120	0,061	0,212	0,135	0,070	
K.2.1	285	140	1xDC	0,105	0,067	0,039	0,135	0,085	0,050	0,161	0,102	0,060	0,185	0,117	0,069	0,205	0,130	0,077	
K.2.2	130	65	1xDC	0,050	0,031	0,018	0,063	0,040	0,024	0,076	0,048	0,028	0,087	0,055	0,033	0,097	0,061	0,037	
K.3.1	205	100	1xDC	0,087	0,055	0,032	0,111	0,070	0,041	0,133	0,084	0,050	0,153	0,097	0,057	0,170	0,108	0,064	
K.3.2	195	95	1xDC	0,074	0,047	0,028	0,095	0,060	0,035	0,114	0,072	0,042	0,131	0,083	0,049	0,145	0,092	0,055	
N.1.1	825	535	1xDC	0,092	0,066	0,047	0,117	0,084	0,060	0,140	0,101	0,072	0,161	0,116	0,083	0,179	0,129	0,092	
N.1.2	825	535	1xDC	0,092	0,066	0,047	0,117	0,084	0,060	0,140	0,101	0,072	0,161	0,116	0,083	0,179	0,129	0,092	
N.2.1	550	355	1xDC	0,096	0,069	0,049	0,123	0,088	0,063	0,147	0,106	0,076	0,169	0,122	0,087	0,188	0,136	0,097	
N.2.2	440	285	1xDC	0,101	0,073	0,052	0,129	0,093	0,066	0,154	0,111	0,079	0,178	0,128	0,091	0,198	0,142	0,101	
N.2.3	315	205	1xDC	0,110	0,079	0,057	0,141	0,101	0,072	0,168	0,121	0,087	0,194	0,139	0,099	0,216	0,155	0,110	
N.3.1	395	255	1xDC	0,046	0,033	0,024	0,059	0,042	0,030	0,070	0,050	0,036	0,081	0,058	0,041	0,090	0,065	0,046	
N.3.2	315	205	1xDC	0,073	0,053	0,038	0,094	0,067	0,048	0,112	0,081	0,058	0,129	0,093	0,066	0,144	0,103	0,074	
N.3.3	235	155	1xDC	0,073	0,053	0,038	0,094	0,067	0,048	0,112	0,081	0,058	0,129	0,093	0,066	0,144	0,103	0,074	
N.4.1																			
S.1.1																			
S.1.2																			
S.2.1																			
S.2.2																			
S.2.3																			
S.3.1																			
S.3.2																			
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Index	52 318 ...									● 1st choice ○ suitable		
	Ø DC (mm) =											
	16			18			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)											
P.1.1	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.1.2	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.1.3	0,149	0,094	0,056	0,160	0,101	0,060	0,171	0,108	0,064	●	○	○
P.1.4	0,149	0,094	0,056	0,160	0,101	0,060	0,171	0,108	0,064	●	○	○
P.1.5	0,149	0,094	0,056	0,160	0,101	0,060	0,171	0,108	0,064	●	○	○
P.2.1	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.2.2	0,160	0,101	0,060	0,171	0,109	0,064	0,183	0,116	0,068	●	○	○
P.2.3	0,147	0,093	0,055	0,157	0,100	0,059	0,168	0,106	0,062	●	○	○
P.2.4	0,147	0,093	0,055	0,157	0,100	0,059	0,168	0,106	0,062	●	○	○
P.3.1	0,155	0,098	0,058	0,166	0,105	0,062	0,177	0,112	0,066	●	○	○
P.3.2	0,139	0,088	0,052	0,148	0,094	0,056	0,158	0,100	0,059	●	○	○
P.3.3	0,139	0,088	0,052	0,148	0,094	0,056	0,158	0,100	0,059	●	○	○
P.4.1	0,107	0,067	0,040	0,114	0,072	0,043	0,122	0,077	0,045	●	○	○
P.4.2	0,107	0,067	0,040	0,114	0,072	0,043	0,122	0,077	0,045	●	○	○
M.1.1	0,093	0,059	0,035	0,100	0,063	0,038	0,107	0,067	0,040	●	○	○
M.2.1	0,101	0,064	0,038	0,108	0,069	0,041	0,116	0,073	0,043	●	○	○
M.3.1	0,077	0,049	0,029	0,082	0,053	0,031	0,088	0,056	0,033	●	○	○
K.1.1	0,266	0,169	0,099	0,286	0,181	0,107	0,305	0,193	0,114	●	○	○
K.1.2	0,236	0,149	0,079	0,256	0,161	0,087	0,275	0,173	0,094	●	○	○
K.2.1	0,226	0,143	0,084	0,243	0,154	0,091	0,259	0,164	0,097	●	○	○
K.2.2	0,107	0,067	0,040	0,115	0,072	0,043	0,122	0,077	0,045	●	○	○
K.3.1	0,187	0,118	0,070	0,200	0,127	0,075	0,213	0,135	0,080	●	○	○
K.3.2	0,160	0,101	0,060	0,172	0,109	0,064	0,183	0,116	0,068	●	○	○
N.1.1	0,197	0,142	0,101	0,211	0,152	0,109	0,225	0,162	0,116	●	○	○
N.1.2	0,197	0,142	0,101	0,211	0,152	0,109	0,225	0,162	0,116	●	○	○
N.2.1	0,207	0,149	0,106	0,222	0,160	0,114	0,237	0,170	0,122	●	○	○
N.2.2	0,217	0,156	0,111	0,233	0,167	0,119	0,248	0,178	0,127	●	○	○
N.2.3	0,237	0,170	0,121	0,254	0,182	0,130	0,270	0,194	0,139	●	○	○
N.3.1	0,099	0,071	0,051	0,106	0,076	0,055	0,113	0,081	0,058	●	○	○
N.3.2	0,158	0,113	0,081	0,169	0,122	0,087	0,180	0,130	0,093	●	○	○
N.3.3	0,158	0,113	0,081	0,169	0,122	0,087	0,180	0,130	0,093	●	○	○
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – Rough milling cutter

Index	Type long		54 077 ...															
			Ø DC (mm) =															
			4			5			6			8			10			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	185	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.2	175	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.3	175	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.4	170	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.1.5	170	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.2.1	175	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.2.2	170	1,0	0,034	0,027	0,017	0,044	0,035	0,022	0,054	0,043	0,027	0,072	0,058	0,036	0,090	0,072	0,045	
P.2.3	160	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.2.4	150	1,0	0,034	0,027	0,017	0,044	0,035	0,022	0,054	0,043	0,027	0,072	0,058	0,036	0,090	0,072	0,045	
P.3.1	160	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.3.2	150	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.3.3	130	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
P.4.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
P.4.2	70	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
M.1.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
M.2.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
M.3.1	90	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
K.1.1	175	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
K.1.2	160	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
K.2.1	170	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
K.2.2	155	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
K.3.1	160	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
K.3.2	145	1,0	0,043	0,035	0,022	0,054	0,043	0,027	0,063	0,050	0,032	0,085	0,068	0,042	0,104	0,084	0,052	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	280	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
N.3.2	280	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
N.3.3	225	1,0	0,056	0,045	0,028	0,070	0,056	0,035	0,085	0,068	0,042	0,113	0,091	0,057	0,144	0,115	0,072	
N.4.1																		
S.1.1	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.1.2	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.2.1	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.2.2	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.2.3	25	1,0	0,018	0,014	0,009	0,023	0,018	0,011	0,027	0,022	0,014	0,036	0,029	0,018	0,045	0,036	0,023	
S.3.1	70	1,0	0,034	0,027	0,017	0,044	0,035	0,022	0,054	0,043	0,027	0,072	0,058	0,036	0,090	0,072	0,045	
S.3.2	40	1,0	0,022	0,017	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,047	0,037	0,023	0,059	0,048	0,030	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	54 077 ... Ø DC (mm) = 12			16			20			● 1st choice ○ suitable		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MMS
	f_z (mm)											
P.1.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.3	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.4	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.1.5	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.2.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.2.2	0,108	0,086	0,054	0,135	0,108	0,068	0,153	0,122	0,077	●	○	○
P.2.3	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.2.4	0,108	0,086	0,054	0,135	0,108	0,068	0,153	0,122	0,077	●	○	○
P.3.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.3.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.3.3	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
P.4.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
P.4.2	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
M.1.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
M.2.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
M.3.1	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
K.1.1	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●	○	○
K.1.2	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●	○	○
K.2.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
K.2.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
K.3.1	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
K.3.2	0,126	0,101	0,063	0,156	0,125	0,078	0,176	0,141	0,088	●	○	○
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●		
N.3.2	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●		
N.3.3	0,173	0,138	0,086	0,216	0,173	0,108	0,247	0,197	0,123	●		
N.4.1												
S.1.1	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.1.2	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.2.1	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.2.2	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.2.3	0,054	0,043	0,027	0,068	0,054	0,034	0,076	0,060	0,038	●		
S.3.1	0,108	0,086	0,054	0,135	0,108	0,068	0,153	0,122	0,077	●		
S.3.2	0,072	0,058	0,036	0,091	0,073	0,045	0,104	0,083	0,052	●		
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

Cutting data standard values – Rough milling cutter

Index	Full slot milling v_c (m/min)	Contour milling v_c (m/min)	52 338 ..., 52 339 ..., 52 341 ..., 52 342 ..., 52 343 ... Ti1000 Ø DC (mm) = 6 f_z (mm)		8 f_z (mm)		10 f_z (mm)		12 f_z (mm)		14 f_z (mm)	
P.1.1	170	190	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.2	160	180	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.3	150	170	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.4	150	170	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.1.5	130	150	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.1	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.2	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.3	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.2.4	110	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.3.1	160	180	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.3.2	90	110	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.3.3	90	110	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
P.4.1	55	65	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
P.4.2	35	45	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
M.1.1	60	70	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
M.2.1	45	55	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
M.3.1	50	60	0,02	0,03	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,07
K.1.1	120	130	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.1.2	110	120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.2.1	110	120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.2.2	90	100	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.3.1	110	120	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
K.3.2	100	110	0,028	0,03	0,04	0,05	0,05	0,06	0,06	0,07	0,07	0,08
N.1.1												
N.1.2												
N.2.1												
N.2.2												
N.2.3												
N.3.1												
N.3.2												
N.3.3												
N.4.1												
S.1.1												
S.1.2												
S.2.1												
S.2.2												
S.2.3												
S.3.1												
S.3.2												
S.3.3												
H.1.1												
H.1.2												
H.1.3												
H.1.4												
H.2.1												
H.3.1												
O.1.1												
O.1.2												
O.2.1												
O.2.2												
O.3.1												

For **Full slot milling** the values indicated in the table are based on:
a_e = 1,0 x DC / a_p = 1,0 x DC

For **Contour milling** the values indicated in the table are based on:
a_e = 0,4 x DC / a_p = 1,0 x DC

Index	52 338 ..., 52 339 ..., 52 340 ..., 52 341 ..., 52 342 ..., 52 343 ...								● 1st choice ○ suitable		
	Ti1000										
	Ø DC (mm) =										
	16		18		20		25				
	f_z (mm)										
									Emulsion	Compressed air	MMS
P.1.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.3	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.4	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.1.5	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.3	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.2.4	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.3.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.3.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.3.3	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
P.4.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
P.4.2	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
M.1.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
M.2.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
M.3.1	0,06	0,08	0,07	0,09	0,08	0,1	0,08	0,1	●		
K.1.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.1.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.2.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.2.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.3.1	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
K.3.2	0,08	0,09	0,09	0,1	0,1	0,12	0,1	0,12	●	○	
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1											
S.1.2											
S.2.1											
S.2.2											
S.2.3											
S.3.1											
S.3.2											
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

With tools with internal cooling (52 338…/52 339…) the cutting speed (v_c) can be increased by 20–30 %!

Cutting data standard values – Ball-nosed end mill

Index	Type short		54 073 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC
			f_z (mm)															
P.1.1	180	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.2	160	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.3	160	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.4	150	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.1.5	150	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.1	170	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.2	140	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.3	140	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.2.4	130	0,08	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	100	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
P.4.2	40	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
M.1.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
M.2.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
M.3.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
K.1.1	120	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
K.1.2	80	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
K.2.1	120	0,08	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036
K.2.2	200	0,08	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036
K.3.1	120	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
K.3.2	100	0,08	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	200	0,08	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044
N.3.2	200	0,08	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044
N.3.3	140	0,08	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044
N.4.1																		
S.1.1	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.1.2	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.1	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.2	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.2.3	30	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.3.1	50	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.3.2	20	0,08	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	54 073 ... Ø DC (mm) = 10			12			16			20			● 1st choice ○ suitable		
	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.5	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.1															
P.3.2															
P.3.3															
P.4.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
P.4.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.3.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
K.1.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.1.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.2.1	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.2.2	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.3.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.3.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.2	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.3	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.4.1															
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting data standard values – Ball-nosed end mill

Index	Type short / long		54 074 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC
			f_z (mm)															
P.1.1	130	0,08xD	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	
P.1.2	110	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.3	110	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.4	95	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.1.5	95	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.1	110	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.2	85	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.3	85	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.2.4	65	0,08xD	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	
P.3.1																		
P.3.2																		
P.3.3																		
P.4.1	60	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
P.4.2	50	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.1.1	50	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.2.1	60	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
M.3.1	60	0,08xD	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
K.1.1	155	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.1.2	145	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.2.1	155	0,08xD	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.2.2	145	0,08xD	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	
K.3.1	155	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
K.3.2	145	0,08xD	0,044	0,035	0,022	0,056	0,045	0,028	0,066	0,053	0,033	0,078	0,062	0,039	0,100	0,080	0,050	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	240	0,08xD	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.3.2	240	0,08xD	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.3.3	170	0,08xD	0,032	0,026	0,016	0,043	0,034	0,022	0,054	0,043	0,027	0,066	0,053	0,033	0,088	0,070	0,044	
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Index	54 074 ... Ø DC (mm) = 10			12			16			20			● 1st choice ○ suitable		
	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	a_e 0,01–0,02 x DC	a_e 0,03–0,04 x DC	a_e 0,05 x DC	Emulsion	Compressed air	MMS
	f_z (mm)														
P.1.1	0,075	0,060	0,038	0,089	0,071	0,045	0,110	0,088	0,055	0,123	0,098	0,062	●	○	○
P.1.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.1.5	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.1	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.2	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.3	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.2.4	0,066	0,053	0,033	0,079	0,063	0,040	0,099	0,079	0,050	0,111	0,089	0,056	●	○	○
P.3.1															
P.3.2															
P.3.3															
P.4.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
P.4.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
M.3.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
K.1.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.1.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.2.1	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.2.2	0,086	0,069	0,043	0,102	0,082	0,051	0,124	0,099	0,062	0,139	0,111	0,070	●	○	○
K.3.1	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
K.3.2	0,122	0,098	0,061	0,144	0,115	0,072	0,177	0,142	0,089	0,200	0,160	0,100	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.2	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.3.3	0,110	0,088	0,055	0,132	0,106	0,066	0,166	0,133	0,083	0,188	0,150	0,094	●		
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

14

Cutting Speeds – Depending upon Coating

Index	uncoated		Ti400		● 1st choice ○ suitable			Ti1000 / DPX72S		● 1st choice ○ suitable		
					Emulsion	Compressed air	MMS			Emulsion	Compressed air	MMS
	v_c (m/min)		v_c (m/min)					v_c (m/min)				
P.1.1	90–110	130–160	90–130	140–200	●	○	○	150–170	220–240	○	●	○
P.1.2	80–100	120–140	90–110	100–160	●	○	○	130–150	180–220	○	●	○
P.1.3	80–100	120–140	90–110	100–160	●	○	○	130–150	180–220	○	●	○
P.1.4	50–60	70–90	60–70	80–110	●	○	○	70–100	100–140	○	●	○
P.1.5	50–60	70–90	60–70	80–110	●	○	○	70–100	100–140	○	●	○
P.2.1	70–90	100–130	80–100	140–160	●	○	○	120–140	170–200	○	●	○
P.2.2	70–90	100–130	80–100	100–150	●	○	○	120–140	170–200	○	●	○
P.2.3	40–60	60–80	50–70	70–100	●	○	○	60–80	90–120	○	●	○
P.2.4	40–60	60–80	50–70	70–100	●	○	○	60–80	90–120	○	●	○
P.3.1	50–60	70–90	60–80	70–110	●	○	○	70–100	100–140	○	●	○
P.3.2	30–50	40–70	40–60	70–100	●	○	○	60–80	80–120	○	●	○
P.3.3	25–40	40–60	40–60	70–100	●	○	○	50–80	70–110	○	●	○
P.4.1	40–50	60–70	40–50	60–80	●	○	○	60–80	90–120	●		○
P.4.2	40–50	60–70	40–50	60–80	●	○	○	60–80	90–120	●		○
M.1.1	40–50	60–70	50–60	80–110	●	○	○	70–80	100–120	●		○
M.2.1	20–30	30–40	25–35	40–70	●	○	○	40–60	60–80	●		○
M.3.1	30–40	40–50	40–50	70–100	●	○	○	50–70	80–100	●		○
K.1.1	60–80	90–120	70–90	100–130	●	○	○	100–110	140–160	○	●	○
K.1.2	60–70	80–100	60–80	90–120	●	○	○	80–100	120–140	○	●	○
K.2.1	60–70	80–100	70–90	100–130	●	○	○	80–100	120–140	○	●	○
K.2.2	50–60	70–90	60–80	90–120	●	○	○	70–80	100–120	○	●	○
K.3.1	60–80	90–120	60–80	90–120	●	○	○	100–110	140–160	○	●	○
K.3.2	50–60	70–90	60–80	90–120	●	○	○	70–80	100–120	○	●	○
N.1.1	<300	<400	280–320	250–350	●	○	○	180–350	250–500	●		○
N.1.2	<300	<400	280–320	220–320	●	○	○	180–350	250–500	●		○
N.2.1	130–180	200–250	220–270	200–300	●	○	○	140–200	200–300	●		○
N.2.2	100–120	140–170	170–200	200–250	●	○	○	110–130	160–180	●		○
N.2.3	40–60	60–80	120–180	150–200	●	○	○	50–70	80–100	●		○
N.3.1	160–200	230–280	100–130	120–200	●	○	○	180–210	250–300	●	○	○
N.3.2	150–180	210–260	100–130	120–180	●	○	○	180–210	250–300	●		○
N.3.3	150–180	210–260	100–130	120–180	●	○	○	180–210	250–300	●		○
N.4.1	150–180	220–260	170–200	170–250		●	○	180–210	250–300		●	○
S.1.1			25–35	30–50	●	○	○	30–40	40–60	●	○	○
S.1.2			25–35	30–50	●	○	○	30–40	40–60	●	○	○
S.2.1	15–25	20–35	40–60	50–80	●	○	○	35–50	50–70	●	○	○
S.2.2			30–40	40–60	●	○	○	30–40	40–60	●	○	○
S.2.3												
S.3.1	30–50	40–70	40–50	70–100	●	○	○	50–70	80–100	●	○	○
S.3.2	30–40	40–50	50–60	80–120	●	○	○	50–60	70–90	●	○	○
S.3.3			30–40	40–60	●	○	○	20–30	30–40	●	○	○
H.1.1								60–70	80–100		●	○
H.1.2								40–60	60–80		●	○
H.1.3								30–40	40–60		●	○
H.1.4								20–30	30–40		●	○
H.2.1								70–80	100–120		●	○
H.3.1								60–70	80–100		●	○
O.1.1	50–70	70–100	120–180	150–220	●	○	○	60–80	80–120	○	●	○
O.1.2	40–60	60–90	70–90	90–120	●	○	○	40–70	60–100	○	●	○
O.2.1	30–50	40–70	50–70	70–110	●	○	○	40–60	60–80	○	●	○
O.2.2	30–50	40–70	50–70	70–110	●	○	○	40–60	60–80	○	●	○
O.3.1	70–100	100–140	100–120	130–180		●	○	80–120	120–180		●	○

Index	Ti1001		● 1st choice ○ suitable			Ti10 / Ti20		● 1st choice ○ suitable		
	v_c (m/min)		Emulsion	Compressed air	MMS	v_c (m/min)		Emulsion	Compressed air	MMS
P.1.1										
P.1.2										
P.1.3										
P.1.4										
P.1.5										
P.2.1										
P.2.2										
P.2.3										
P.2.4										
P.3.1										
P.3.2										
P.3.3										
P.4.1										
P.4.2										
M.1.1										
M.2.1										
M.3.1										
K.1.1										
K.1.2										
K.2.1										
K.2.2										
K.3.1										
K.3.2										
N.1.1	300–400	300–500	●		○	150–350	250–500	●		○
N.1.2	300–400	300–500	●		○	120–220	150–300	●		○
N.2.1	250–300	300–450	●		○	150–180	220–250	●		○
N.2.2	200–250	250–350	●		○	100–130	150–180	●		○
N.2.3	150–200	200–250	●		○					○
N.3.1						170–180	240–260	●		○
N.3.2	220–280	250–330	●		○	120–150	170–220	●		○
N.3.3	220–280	250–330	●		○	120–150	170–220	●		○
N.4.1						140–170	200–250		●	
S.1.1										
S.1.2										
S.2.1										
S.2.2										
S.2.3										
S.3.1							80–100	●		○
S.3.2										
S.3.3										
H.1.1										
H.1.2										
H.1.3										
H.1.4										
H.2.1										
H.3.1										
O.1.1						220–280	300–400	●		○
O.1.2						140–170	200–240	●		○
O.2.1						70–100	100–140	●		○
O.2.2						70–100	100–140	●		○
O.3.1										

Depths of Cut Reference Values – Milling Cutters – extra short – long

Index	$a_{p\,max.}$ x DC		Ø DC (mm) = 2,5			3,0			$a_{p\,max.}$ x DC		Ø DC (mm) = 4,0			5,0			6,0		
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)								f_z (mm)								
P.1.1	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,041	0,027	0,020	0,054	0,035	0,026
P.1.2	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.1.3	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.1.4	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.1.5	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.2.1	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.2.2	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
P.2.3	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
P.2.4	1,0	0,5	0,014	0,009	0,007	0,020	0,013	0,010	1,5	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
P.3.1	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.3.2	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.3.3	1,0	0,5	0,017	0,011	0,008	0,024	0,016	0,012	1,5	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
P.4.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
P.4.2	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
M.1.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
M.2.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
M.3.1	1,0	0,5	0,011	0,007	0,005	0,016	0,011	0,008	1,5	1,0	0,022	0,014	0,011	0,029	0,019	0,014	0,036	0,023	0,017
K.1.1	1,0	0,5	0,020	0,013	0,010	0,029	0,019	0,014	1,5	1,0	0,039	0,026	0,019	0,052	0,034	0,025	0,064	0,042	0,031
K.1.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.2.1	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.2.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.3.1	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
K.3.2	1,0	0,5	0,017	0,011	0,008	0,025	0,016	0,012	1,5	1,0	0,034	0,022	0,016	0,044	0,029	0,022	0,055	0,036	0,027
N.1.1	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.1.2	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.2.1	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.2.2	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.2.3	1,0	0,5	0,028	0,018	0,013	0,040	0,027	0,020	1,5	1,0	0,055	0,036	0,027	0,072	0,047	0,035	0,090	0,059	0,043
N.3.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,0	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
N.3.2	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,0	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
N.3.3	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,0	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
N.4.1	1,0	0,5	0,026	0,017	0,012	0,038	0,025	0,018	1,5	1,0	0,051	0,033	0,025	0,067	0,044	0,033	0,083	0,054	0,040
S.1.1	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
S.1.2	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
S.2.1	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1,0	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
S.2.2	0,7	0,3	0,014	0,009	0,007	0,020	0,013	0,010	1,0	1,0	0,027	0,018	0,013	0,036	0,024	0,018	0,045	0,029	0,022
S.2.3	0,7	0,3	0,015	0,010	0,007	0,022	0,014	0,011	1,0	1,0	0,030	0,020	0,014	0,039	0,026	0,019	0,049	0,032	0,024
S.3.1	0,7	0,3	0,017	0,011	0,008	0,024	0,016	0,012	1,0	1,0	0,033	0,022	0,016	0,043	0,028	0,021	0,054	0,035	0,026
S.3.2	0,7	0,3	0,018	0,012	0,009	0,026	0,017	0,013	1,0	1,0	0,035	0,023	0,017	0,046	0,030	0,023	0,058	0,038	0,028
S.3.3	0,7	0,3	0,018	0,012	0,009	0,026	0,017	0,013	1,0	1,0	0,035	0,023	0,017	0,046	0,030	0,023	0,058	0,038	0,028
H.1.1	0,5*		0,019**			0,027**			1,0		0,037**			0,049**			0,061**		
H.1.2	0,5*		0,017**			0,025**			1,0		0,034**			0,045**			0,056**		
H.1.3	0,5*		0,015**			0,022**			1,0		0,030**			0,040**			0,050**		
H.1.4	0,5*		0,013**			0,020**			1,0		0,026**			0,035**			0,043**		
H.2.1	0,5*		0,021**			0,030**			1,0		0,041**			0,054**			0,067**		
H.3.1	0,5*		0,019**			0,027**			1,0		0,037**			0,049**			0,061**		
O.1.1	1,0	0,5	0,044	0,029	0,021	0,064	0,042	0,031	1,5	1,0	0,086	0,057	0,042	0,114	0,074	0,055	0,141	0,092	0,068
O.1.2	1,0	0,5	0,040	0,026	0,019	0,058	0,038	0,028	1,5	1,1	0,078	0,051	0,038	0,103	0,068	0,050	0,128	0,084	0,062
O.2.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,2	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
O.2.2	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,3	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030
O.3.1	1,0	0,5	0,019	0,012	0,009	0,028	0,018	0,013	1,5	1,4	0,038	0,025	0,018	0,050	0,032	0,024	0,061	0,040	0,030

* = Trimming and trochoidal slot milling

** = With an a_e = 0.1xDC

Depths of cut reference values – Finish milling, extra short – long

$a_{p\,max.}$ x DC	Ø DC (mm) = 2,5			3,0			$a_{p\,max.}$ x DC	Ø DC (mm) = 4,0			5,0			6,0		
								a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm			a_e : 0,2–0,3 mm		
	f_z (mm)							f_z (mm)								
0,7							1,5	0,080***			0,090***			0,100***		

*** = To improve the surface quality reduce the f_z

Cutting data for Micro-Mini cutters for milling with diameter < 2.5 mm → v_c/f_z Page 432–439

Index	Ø DC (mm) = 8,0			10,0			12,0			14,0			16,0			18,0			20,0–25,0		
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	f_z (mm)																				
P.1.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.3	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.4	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.1.5	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.2.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.2.2	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
P.2.3	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
P.2.4	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
P.3.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.3.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.3.3	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
P.4.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
P.4.2	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
M.1.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
M.2.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
M.3.1	0,050	0,030	0,020	0,060	0,040	0,030	0,060	0,040	0,030	0,080	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,040	0,110	0,070	0,05
K.1.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,060	0,140	0,080	0,060	0,160	0,100	0,070	0,170	0,110	0,080	0,200	0,130	0,08
K.1.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.2.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.2.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.3.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
K.3.2	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,140	0,090	0,060	0,150	0,100	0,070	0,170	0,110	0,07
N.1.1	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.1.2	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.2.1	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.2.2	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.2.3	0,120	0,080	0,060	0,150	0,100	0,070	0,160	0,100	0,080	0,200	0,110	0,080	0,220	0,150	0,100	0,240	0,160	0,110	0,270	0,180	0,12
N.3.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
N.3.2	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
N.3.3	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
N.4.1	0,110	0,070	0,050	0,130	0,090	0,070	0,150	0,100	0,070	0,180	0,110	0,080	0,210	0,130	0,090	0,230	0,150	0,100	0,250	0,170	0,11
S.1.1	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
S.1.2	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
S.2.1	0,060	0,040	0,030	0,080	0,050	0,040	0,090	0,060	0,040	0,110	0,060	0,050	0,120	0,080	0,050	0,130	0,090	0,060	0,150	0,100	0,06
S.2.2	0,060	0,040	0,030	0,070	0,050	0,040	0,080	0,050	0,040	0,100	0,060	0,040	0,110	0,070	0,050	0,120	0,080	0,050	0,140	0,090	0,06
S.2.3	0,060	0,040	0,030	0,080	0,050	0,040	0,090	0,060	0,040	0,110	0,060	0,050	0,120	0,080	0,050	0,130	0,090	0,060	0,150	0,100	0,06
S.3.1	0,070	0,050	0,030	0,090	0,060	0,040	0,100	0,060	0,050	0,120	0,070	0,050	0,130	0,090	0,060	0,150	0,100	0,060	0,160	0,110	0,07
S.3.2	0,070	0,050	0,040	0,090	0,060	0,050	0,100	0,070	0,050	0,130	0,070	0,050	0,140	0,090	0,060	0,160	0,100	0,070	0,180	0,120	0,08
S.3.3	0,070	0,050	0,040	0,090	0,060	0,050	0,100	0,070	0,050	0,130	0,070	0,050	0,140	0,090	0,060	0,160	0,100	0,070	0,180	0,120	0,08
H.1.1	0,080**			0,100**			0,110**			0,120**			0,130**			0,150**			0,170**		
H.1.2	0,070**			0,090**			0,100**			0,110**			0,120**			0,140**			0,150**		
H.1.3	0,060**			0,080**			0,090**			0,100**			0,110**			0,120**			0,130**		
H.1.4	0,060**			0,070**			0,080**			0,080**			0,100**			0,110**			0,120**		
H.2.1	0,090**			0,110**			0,120**			0,130**			0,150**			0,160**			0,180**		
H.3.1	0,080**			0,100**			0,110**			0,120**			0,130**			0,150**			0,170**		
O.1.1	0,180	0,120	0,090	0,230	0,150	0,110	0,250	0,160	0,120	0,310	0,180	0,130	0,350	0,230	0,150	0,380	0,250	0,170	0,430	0,280	0,19
O.1.2	0,170	0,110	0,080	0,210	0,140	0,100	0,230	0,150	0,110	0,280	0,160	0,120	0,320	0,210	0,140	0,350	0,230	0,150	0,390	0,260	0,17
O.2.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
O.2.2	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08
O.3.1	0,080	0,050	0,040	0,100	0,070	0,050	0,110	0,070	0,050	0,130	0,080	0,060	0,150	0,100	0,070	0,170	0,110	0,070	0,190	0,120	0,08

Ø DC (mm) = 8,0	10,0	12,0	14,0	16,0	18,0	20,0–25,0
a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm	a_e : 0,2–0,3 mm
f_z (mm)						
0,110***	0,130***	0,150***	0,170***	0,190***	0,210***	0,230***

Plunging angle for ramping and helical milling: 3°

Feed rate guide values for ball nosed and torus cutters on → **Page 486**

14

Depths of Cut Reference Values – Milling Cutters – extra long

Index	$a_{p\,max.}$ x DC	Ø DC (mm) = 2,5		3,0		$a_{p\,max.}$ x DC	4,0		5,0		6,0		8,0		10,0		12,0	
		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC		a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
		f_z (mm)					f_z (mm)											
P.1.1	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,052	0,034	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.2	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.3	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.4	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.1.5	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.2.1	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.2.2	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
P.2.3	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
P.2.4	0,6	0,011	0,007	0,020	0,013	1,0	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
P.3.1	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.3.2	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.3.3	0,6	0,013	0,009	0,024	0,016	1,0	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
P.4.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
P.4.2	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
M.1.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
M.2.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
M.3.1	0,6	0,009	0,006	0,016	0,011	1,0	0,022	0,014	0,027	0,018	0,033	0,021	0,040	0,030	0,050	0,040	0,060	0,040
K.1.1	0,6	0,015	0,010	0,029	0,019	1,0	0,039	0,025	0,048	0,032	0,058	0,038	0,080	0,050	0,100	0,060	0,110	0,070
K.1.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.2.1	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.2.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.3.1	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
K.3.2	0,6	0,013	0,009	0,025	0,016	1,0	0,033	0,022	0,042	0,027	0,050	0,033	0,070	0,040	0,080	0,060	0,090	0,060
N.1.1	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.1.2	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.2.1	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.2.2	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.2.3	0,6	0,022	0,014	0,041	0,027	1,0	0,054	0,035	0,068	0,044	0,081	0,053	0,110	0,070	0,140	0,090	0,150	0,100
N.3.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
N.3.2	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
N.3.3	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
N.4.1	0,6	0,020	0,013	0,038	0,025	1,0	0,050	0,033	0,063	0,041	0,076	0,049	0,100	0,070	0,130	0,080	0,140	0,090
S.1.1	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
S.1.2	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
S.2.1	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,060	0,040	0,070	0,050	0,080	0,050
S.2.2	0,3	0,011	0,007	0,020	0,013	0,5	0,027	0,018	0,034	0,022	0,041	0,027	0,050	0,040	0,070	0,040	0,080	0,050
S.2.3	0,3	0,012	0,008	0,022	0,014	0,5	0,029	0,019	0,037	0,024	0,044	0,029	0,060	0,040	0,070	0,050	0,080	0,050
S.3.1	0,3	0,013	0,009	0,024	0,016	0,5	0,033	0,021	0,041	0,027	0,049	0,032	0,070	0,040	0,080	0,050	0,090	0,060
S.3.2	0,3	0,014	0,009	0,026	0,017	0,5	0,035	0,023	0,044	0,029	0,052	0,034	0,070	0,050	0,090	0,060	0,100	0,060
S.3.3	0,3	0,014	0,009	0,026	0,017	0,5	0,035	0,023	0,044	0,029	0,052	0,034	0,070	0,050	0,090	0,060	0,100	0,060
H.1.1	0,3*	0,012**		0,022**		0,5*	0,029**		0,037**		0,044**		0,060**		0,070**		0,080**	
H.1.2	0,3*	0,011**		0,020**		0,5*	0,027**		0,034**		0,041**		0,050**		0,070**		0,080**	
H.1.3	0,3*	0,010**		0,018**		0,5*	0,024**		0,030**		0,036**		0,050**		0,060**		0,070**	
H.1.4	0,3*	0,008**		0,016**		0,5*	0,021**		0,026**		0,031**		0,040**		0,050**		0,060**	
H.2.1	0,3*	0,013**		0,024**		0,5*	0,033**		0,041**		0,049**		0,070**		0,080**		0,090**	
H.3.1	0,3*	0,012**		0,022**		0,5*	0,029**		0,037**		0,044**		0,060**		0,070**		0,080**	
O.1.1	0,6	0,034	0,022	0,064	0,042	1,0	0,085	0,056	0,107	0,070	0,128	0,084	0,170	0,110	0,210	0,140	0,230	0,150
O.1.2	0,6	0,031	0,020	0,058	0,038	1,0	0,077	0,051	0,097	0,063	0,116	0,076	0,160	0,100	0,190	0,130	0,210	0,140
O.2.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
O.2.2	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070
O.3.1	0,6	0,015	0,010	0,028	0,018	1,0	0,037	0,024	0,046	0,030	0,056	0,037	0,070	0,050	0,090	0,060	0,100	0,070

* = Trimming and trochoidal slot milling

** = With an a_e = 0.1xDC

Depths of cut reference values – Finish milling, extra long

$a_{p\,max.}$ x DC	Ø DC (mm) = 2,5	3,0	$a_{p\,max.}$ x DC	4,0	5,0	6,0	8,0	10,0	12,0
	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm		a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm
	f_z (mm)			f_z (mm)					
0,7			0,7	0,080***	0,090***	0,100***	0,110***	0,130***	0,150***

*** = With an a_p of 1.5 x DC multiply the f_z by 0.75

Cutting data for Micro-Mini cutters for milling with diameter < 2.5 mm → v_c/f_z Page 432–439

Index	Ø DC (mm) = 14,0		16,0		18,0		20,0–25,0	
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC
	f_z (mm)							
P.1.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.2	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.3	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.4	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.1.5	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.2.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.2.2	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
P.2.3	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
P.2.4	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
P.3.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.3.2	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.3.3	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
P.4.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
P.4.2	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
M.1.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
M.2.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
M.3.1	0,070	0,040	0,070	0,050	0,080	0,050	0,090	0,060
K.1.1	0,120	0,080	0,130	0,090	0,150	0,100	0,160	0,110
K.1.2	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.2.1	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.2.2	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.3.1	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
K.3.2	0,100	0,070	0,110	0,070	0,130	0,080	0,140	0,090
N.1.1	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.1.2	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.2.1	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.2.2	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.2.3	0,160	0,110	0,180	0,120	0,200	0,130	0,230	0,150
N.3.1	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
N.3.2	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
N.3.3	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
N.4.1	0,150	0,100	0,170	0,110	0,190	0,120	0,210	0,140
S.1.1	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
S.1.2	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
S.2.1	0,090	0,060	0,100	0,070	0,110	0,070	0,120	0,080
S.2.2	0,080	0,050	0,090	0,060	0,100	0,070	0,110	0,080
S.2.3	0,090	0,060	0,100	0,070	0,110	0,070	0,120	0,080
S.3.1	0,100	0,060	0,110	0,070	0,120	0,080	0,140	0,090
S.3.2	0,110	0,070	0,120	0,080	0,130	0,090	0,150	0,100
S.3.3	0,110	0,070	0,120	0,080	0,130	0,090	0,150	0,100
H.1.1	0,090**		0,100**		0,110**		0,120**	
H.1.2	0,080**		0,090**		0,100**		0,110**	
H.1.3	0,070**		0,080**		0,090**		0,100**	
H.1.4	0,060**		0,070**		0,080**		0,090**	
H.2.1	0,100**		0,110**		0,120**		0,140**	
H.3.1	0,090**		0,100**		0,110**		0,120**	
O.1.1	0,260	0,170	0,290	0,190	0,320	0,210	0,360	0,230
O.1.2	0,230	0,150	0,260	0,170	0,290	0,190	0,330	0,210
O.2.1	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
O.2.2	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100
O.3.1	0,110	0,070	0,130	0,080	0,140	0,090	0,160	0,100

	Ø DC (mm) = 14,0	16,0	18,0	20,0–25,0
	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm	a_e 0,2–0,3 mm
	f_z (mm)			
	0,170***	0,190***	0,210***	0,230***

Plunging angle for ramping and helical milling: 3°

Feed rate guide values for ball nosed and torus cutters on → **Page 486**

14

Feedrate for machining in steel, iron and non-ferrous materials with torus and ball nosed end mills

Ball nose end milling cutters



Ball Nosed and Torus Cutters



Torus end milling cutters



Ø DC mm	f_z mm	f_z mm	f_z mm
2	0,015	0,010	0,010
3	0,030	0,020	0,015
4	0,040	0,030	0,020
5	0,060	0,050	0,030
6	0,070	0,060	0,050
8	0,100	0,080	0,070
10	0,120	0,100	0,080
12	0,150	0,120	0,100
16	0,180	0,150	0,120
18	0,200	0,180	0,140
20	0,220	0,200	0,150

The feed should be reduced by 10–20% for uncoated tools.

Feedrates for the machining of hardened materials with Ti1000 coated torus and ball nosed cutters

Ball Nosed and Torus Cutters

Hardness = 40–60 HRC

v_c = 80 -120 m/min



Ball Nosed and Torus Cutters

Hardness = 40–60 HRC

v_c = 80 -120 m/min



Ø DC mm	f_z mm	f_z mm
2	0,005	0,005
3	0,015	0,010
4	0,030	0,015
5	0,050	0,020
6	0,060	0,030
8	0,070	0,035
10	0,080	0,040
12	0,080	0,050
16	0,100	0,080

Trochoidal Milling

Due to the trochoidal milling process, large depths of cut are also possible on unstable and weak machines.

Depending on the tensile strength of the material, the radial infeed is 5–20% of the cutting edge diameter. As trochoidal milling is a plain milling process, the forces that occur are lower.

When trochoidal milling a slot, the milling cutter diameter should be a maximum of 70% of the slot width.
Example: Slot 20 mm x 70% = 14 mm
A Ø 14 mm milling cutter would be the perfect tool.

Advantages/Benefits

- ▲ Reduced tool wear
- ▲ Reduced cycle time
- ▲ Exploiting the full length of the cutting edge
- ▲ Reduced cutting pressure

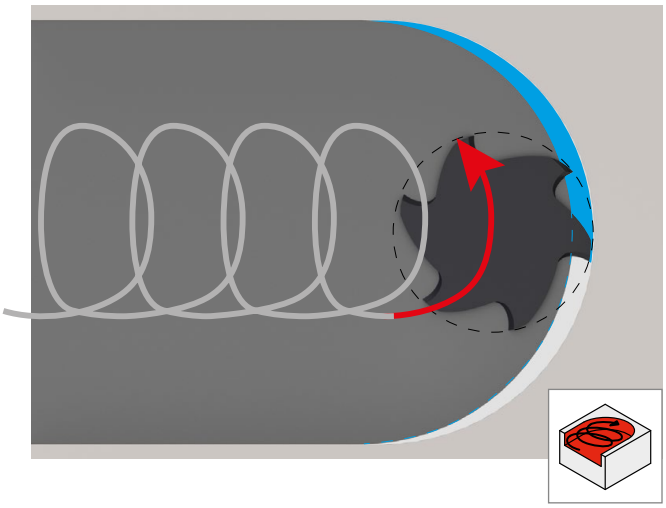

Most CAM providers offer an application for trochoidal milling. Our recommendations for this application are as follows:

Material	Depth of Cut	Radial Infeed	Feed rate Correction Factor	v_c Correction Factor
Steel	2xDC	0,05xD	3,5	1,6
	2xDC	0,10xD	2,5	1,3
Stainless steel	2xDC	0,05xD	3,5	1,4
	2xDC	0,10xD	2,5	1,2
Cast iron	2xDC	0,05xD	3,5	1,6
	2xDC	0,10xD	2,5	1,3
Non-ferrous metals	2xDC	0,05xD	3,5	1,8
	2xDC	0,10xD	2,5	1,4
	2xDC	0,20xD	1,5	1,2
Heat-resistant	2xDC	0,05xD	2,5	1,4
	2xDC	0,10xD	2,0	1,2
Tempered steel	2xDC	0,02xD	2,5	1,5
	2xDC	0,05xD	2,0	1,3

14

Please note that the indicated values may require reducing due to the component design, machine rigidity and machine dynamics. In optimal conditions, the values can also be increased.

Technical references

Feedrate Adjustment

If the speed stated in the tables cannot be achieved by the machine spindle you are using, reduce the feed rate as a percentage of the speed.

Example:
required according to table = n 50,000 rpm and v_f 1000 mm/min,
available machine speed = 40,000 rpm

Calculation of the feed rate to be entered:
40,000 rpm / 50,000 rpm *100= corresponds to 80%
1000 mm/min * 80% = 800 mm/min

The feed rate to be entered = **800 mm/min.**

Angled ramping with solid carbide cutters

Angled ramping with solid carbide cutters is possible at an angle of 2° to 10° depending on the cutter type.
A protective edge chamfer or corner radius is an advantage.



Recommended plunging angle for solid carbide milling cutter:

- ▲ Plunging angle up to ≤ 3 cutting edges → 6°–10°
- ▲ Plunging angle for 4 cutting edges → 3°–6°
- ▲ Plunging angle for 5 cutting edges → 2°–3°
- ▲ Plunging angle for > 5 cutting edges → only possible to a limited extent

Preparation for T-slot milling cutter

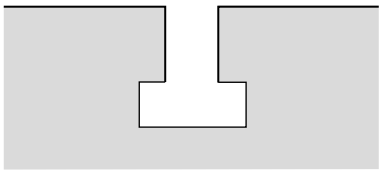

To produce a T-slot with the solid carbide T-slot milling cutter, proceed as follows:

1

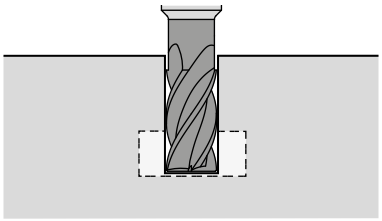

Rough-mill the slot up to approx. 0.5 mm above the bottom.
Bottom corresponds to the finished dimension of the T-slot.
The slot width should be milled to the finished dimension during this step.

2

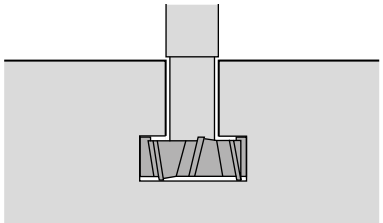

Then finish milling the slot with the T-slot milling cutter.
Reduce the feed by 50% when entering the material

General formula for calculating the cutting parameters

Designation	Abbreviation	Unit	Formula	Example	
Number of revolutions	**n**	**min^{-1}**	$n = \frac{v_c \times 1000}{DC \times \pi}$	v_c = 25 m/min DC = 20 mm	$n = \frac{25 \times 1000}{20 \times \pi}$ = 398 min^{-1}
Cutting speed	**v_c**	**m/min**	$v_c = \frac{DC \times \pi \times n}{1000}$	n = 400 min^{-1} DC = 20 mm	$v_c = \frac{20 \times \pi \times 400}{1000}$ = 25 m/min
Feed per tooth	**f_z**	**mm**	$f_z = \frac{v_f}{ZEFP \times n}$	v_f = 320mm/min. n = 400 min^{-1} ZEFP = 4	$f_z = \frac{320}{4 \times 400}$ = 0,2 mm
Feed per revolution	**f**	**mm/rev.**	$f = f_z \times ZEFP$	f_z = 0,2 mm ZEFP = 4	f = 0,2 x 4 = 0,8 mm
Feed rate	**v_f**	**mm/min.**	$v_f = f_z \times ZEFP \times n$	f_z = 0,2 mm ZEFP = 4 n = 400 min^{-1}	v_f = 0,2 x 4 x 400 = 320 mm/min.
Average chip thickness	**h_m**	**mm**	$h_m = f_z \times \sqrt{\frac{a_e}{DC}}$	f_z = 0,2 mm a_e = 0,3 mm DC = 20 mm	h_m = 0,2 x $\sqrt{\frac{0,3}{20}}$ = 0,024 mm

ZEFP = Number of flutes
a_e = cutting width

Calculation of the feed rate on the midpoint path of the milling cutter (v_{fM})

Designation	Abbreviation	Unit	Formula	Example
Internal contour	**v_{fM}**	**mm/min.**	$v_{fM} = \frac{v_f \times (D - DC)}{D}$	
Outside profile	**v_{fM}**	**mm/min.**	$v_{fM} = \frac{v_f \times (D + DC)}{D}$	
Helical ramping	**v_{fM}**	**mm/min.**	$v_{fM} = \frac{n \times f_z \times ZEFP \times (D - D_C)}{D}$	

14

Assembly instructions

Image of MultiLock cylindrical shank adapter assembly

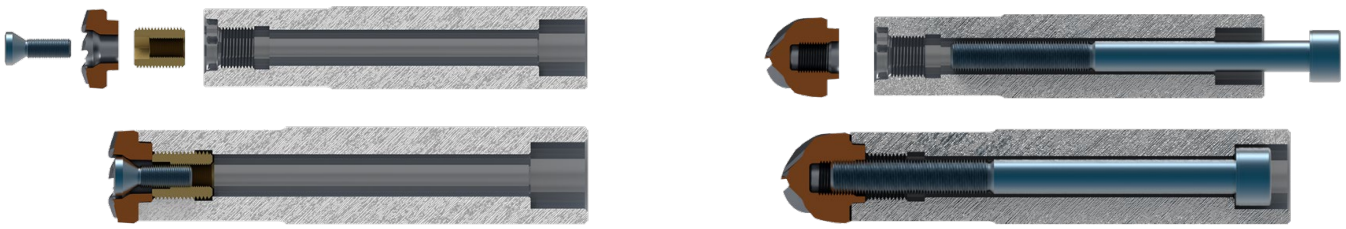

▲ The cylindrical shank adapter can be used universally. In this case, the MultiLock high-feed and torus cutters are clamped from the front using a threaded bush and clamping screw. The MultiLock radius milling and deburring cutters are clamped via the shank using a cylindrical screw.

Image of MultiLock screw-in adapter assembly

Type A

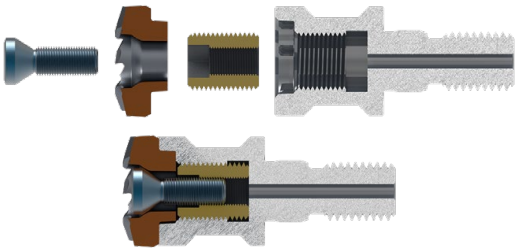

▲ The type A screw-in adapter must be used for MultiLock high-feed and torus cutters. These are clamped from the front using a threaded bush and clamping screw.

Type B

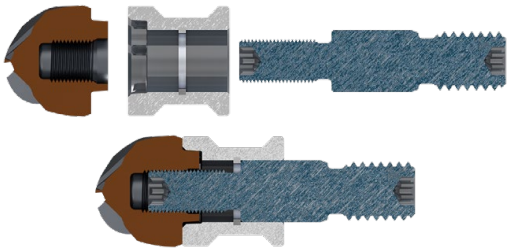

▲ The type B screw-in adapter has two parts and must be used for MultiLock radius milling and deburring cutters. These are tensioned from the rear using a clamping screw. The clamping screw is simultaneously used for screwing in the adapter.

Detailed assembly instructions are enclosed with the respective holders. You can also find this in our online shop.

Comparison – ball nose end milling cutters vs. 3D Finish

3D Finish

- Radius does not depend on the tool diameter
- High depths of cut possible owing to the large radius
- Tools with a large radius and small shank diameter are more economical as the carbide content is lower, e.g. diameter 16 mm, radius 1500 mm

Ball nose end milling cutters

- Radius depends on the tool diameter
- Only low widths of cut are possible; linked to the small radius
- Tools with a large diameter/radius are expensive due to the high carbide content, e.g. diameter 16 mm radius 8 mm

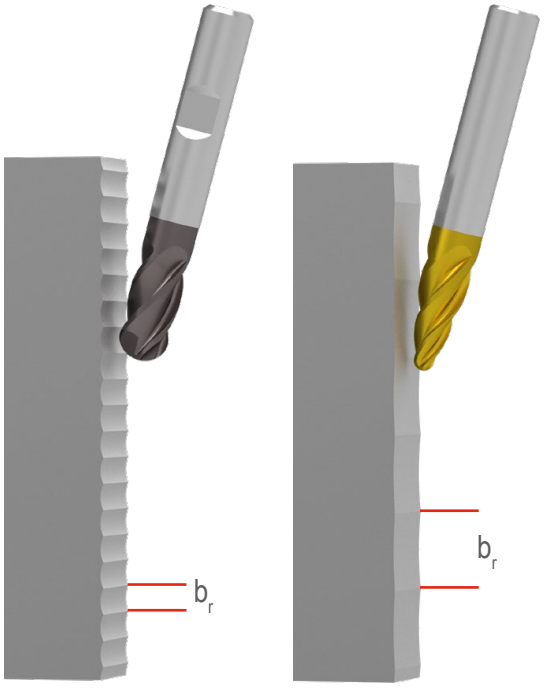

Formulae for calculations:

$$b_r = 2 \times \sqrt{R_{th} \times (r \times 2 - R_{th})}$$

$$R_{th} = r - \sqrt{\frac{(r \times 2)^2 - b_r^2}{4}}$$

$$R_a \simeq 0{,}1 \times R_{th}$$

$$R_{th} \simeq R_a / 0{,}1$$

Result

Required surface quality = R_a 0,4
$R_{th} \simeq 0{,}4 / 0{,}1 \simeq 4\ \mu m = 0{,}004$ mm

Ball nose end milling cutters
Diameter 16 mm, radius 8 mm
$b_r = 2 \times \sqrt{0{,}004 \times (8 \times 2 - 0{,}004)}$
b_r = 0,51 mm

3D Finish
Diameter 16 mm, radius 1500 mm
$b_r = 2 \times \sqrt{0{,}004 \times (1500 \times 2 - 0{,}004)}$
b_r = 6,93 mm



Key

R_{th} = Theoretical roughness
r = Radius
R_a = Average roughness
b_r = Step down

Application information

3D Finish – barrel shape

- Suitable for easily accessible areas

3D Finish – oval shape

- Suitable for easily accessible flanks
- Not suitable for deep areas

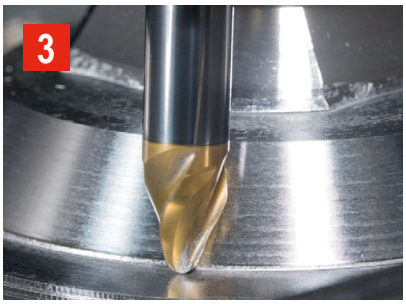

3D Finish – taper shape

- Suitable for steep walls and deep cavities
- α/2 is the angle to the surface to be used
- If the surface exhibits a tilt angle of α/2, the surface can also be machined on three axes



3D Finish – taper shape

- Suitable for flat areas
- α/2 is the angle to the surface to be used
- If the surface exhibits a tilt angle of α/2, the surface can also be machined on three axes



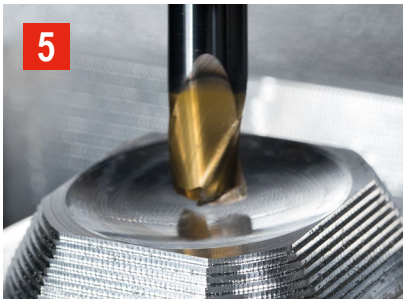

3D Finish – lens shape

- Suitable for flat areas

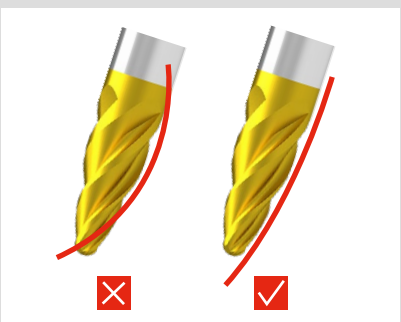

Please note:

Note that the curvature of the component should be greater than the curvature of the tool.

Check whether your programming system supports the tool geometry of the 3D Finish and can work with it.

Differences between the milling cutter types

Designation	Type	Shape of the chip breaker	Application description	Chip shape
Rough and finish milling cutters	WF NF HF		▲ High chip volume, even on less powerful machines ▲ Surface quality mostly sufficient ▲ Lower cutting pressure compared to smooth-edged milling cutters ▲ Finish machining not needed	
Rough milling cutters	WR NR HR		▲ Produces very small and short chips ▲ Problem-solver in unstable conditions ▲ High chip volume, even on the weakest machines ▲ Exceptionally well suited to full slot milling ▲ Additional finish machining needed ▲ High feeds possible	

Temperature scale for chips when dry machining steel

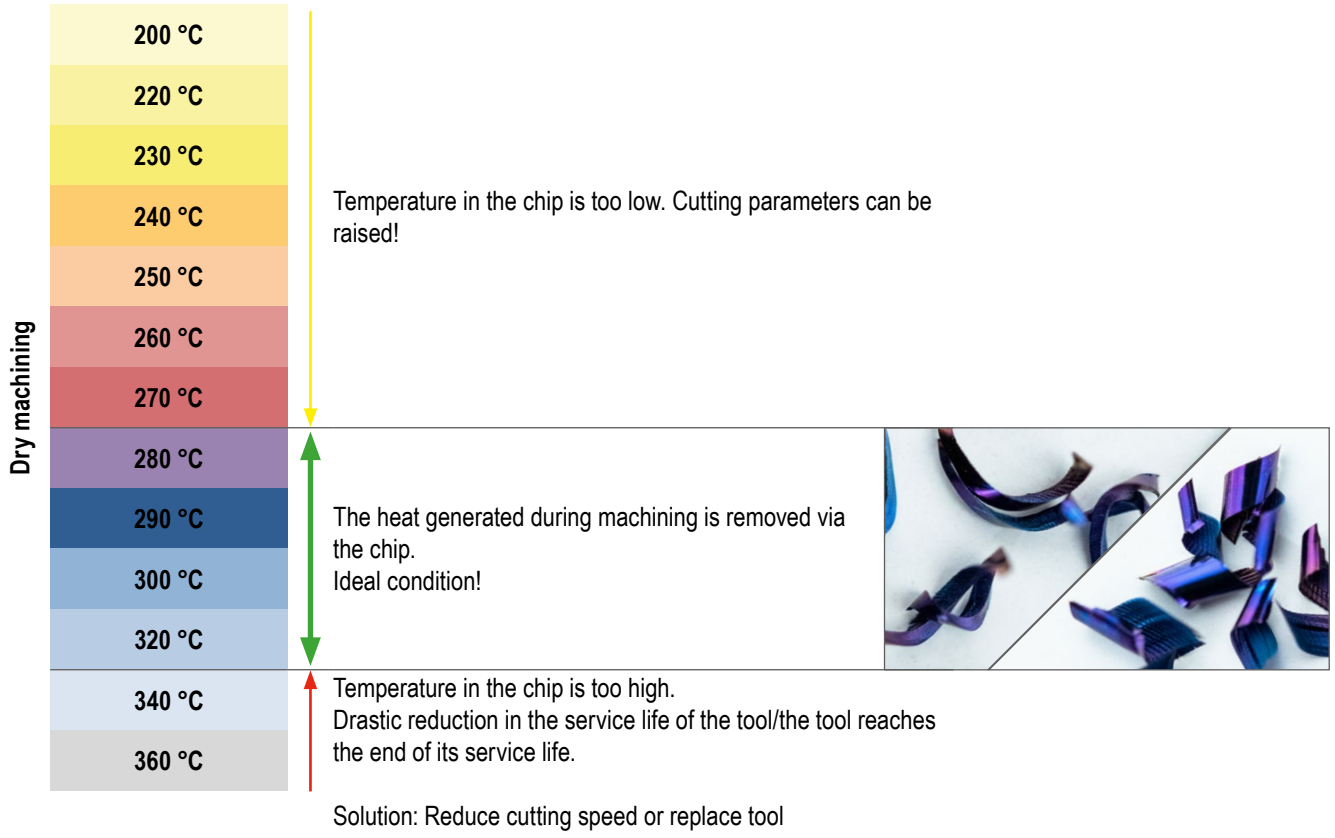

14

Tips for Tool Selection

Rake and helix angles combined with the coating are decisive factors for the operational area.

Characteristics	Benefits
Helix angle with slow spiral	
▲ For materials with high tensile strength	▲ High edge stability
▲ For high material removal rates	▲ Low tendency to edge chipping
▲ For slot milling, pocket milling, rough milling	
Helix angle with quick spiral	
▲ For soft steels, non ferrous metals, etc.	▲ Soft cut
▲ For low material removal rates	▲ Low cutting forces
▲ Typical for finishing processes	
Small rake angles are applied	
▲ For hard, brittle materials	▲ High edge stability
▲ For high material removal rates	▲ Low tendency to edge chipping
▲ For rough machining	
Large rake angles are applied	
▲ For soft materials	▲ Soft cut
▲ For low material removal rates	▲ Low cutting forces
▲ For finishing	▲ Favorable chip flow
	▲ Low tendency to stick

Correction factor for solid carbide milling cutters

Factors for cutting speed (v_c) and feed rate (f_z) in relation to the overhang length (LPR)

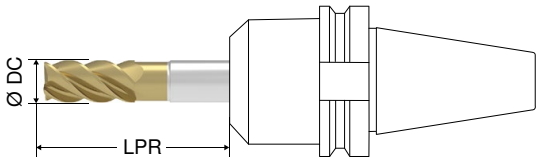

Length					
Overhang length (LPR)	1,5 x DC	4 x DC	8 x DC	12 x DC	> 12 x DC
Factor for v_c (Kf v_c)	1,0	1,0	0,9	0,85	0,7
Factor for f_z (Kf f_z)	1,2	1,0	0,8	0,7	0,5

Factors for cutting speed (v_c) and feed rate (f_z) in relation to the cutting depth (a_p) and cutting width (a_e)

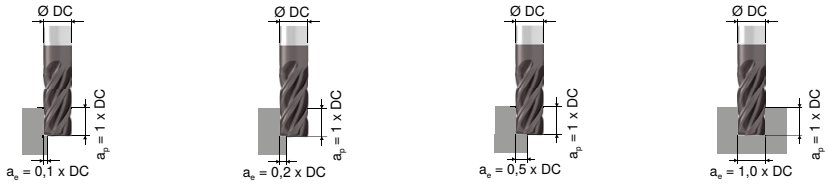

Factor for v_c (Kf v_c)	1,3	1,1	1,0	0,85
Factor for f_z (Kf f_z)	1,5	1,3	1,0	0,8

Calculation aid for copy milling

Theoretical surface roughness (R_{th}) and step over (b_r)

$$R_{th} = r - \sqrt{\frac{(r \times 2)^2 - b_r^2}{4}}$$

$$b_r = 2 \times \sqrt{R_{th} \times (r \times 2 - R_{th})}$$

$$R_{th} \simeq R_a / 0{,}1$$

$$R_a \simeq 0{,}1 \times R_{th}$$

When copy milling, in order to achieve as smooth a surface as possible, the step over b_r should be adapted to the cutter diameter DC.
The smaller the cutter diameter DC is, the smaller the step over b_r must be.

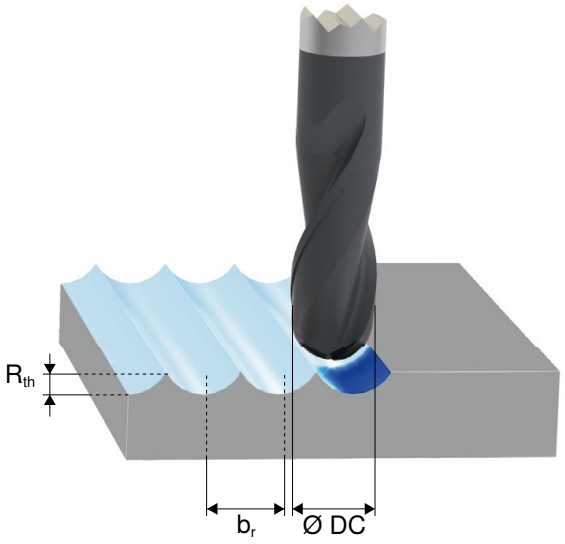

RPM correction factor (Kf n) for copy milling

$$n = \frac{v_c \times 1000}{DC \times \pi} \times Kf\ n$$

Rough machining

	Peripheral and ball nose copy milling	Ball nose copy milling	
			
Axial milling depth a_p	0,5 x DC	> 0,5 x DC	0,2 x DC – 0,5 x DC
Step over b_r	1 x DC	0,2 x DC – 0,5 x DC	0,2 x DC – 0,5 x DC
Correction factor (Kf n)	1	1	1,1

Finish milling

	Ball nose copy milling		
			
Axial milling depth a_p	< 0,2 x DC	0,2 x DC – 0,5 x DC	> 0,5 x DC
Step over b_r	< 0,2 x DC	< 0,2 x DC	< 0,2 x DC
Correction factor (Kf n)	2	1,3	1

14

Calculation aid for copy milling

For peripheral milling or ball nosed copy milling at cutting depths of $\mathbf{a_p} \geq 0.5 \times DC$ and $\mathbf{a_e}$ = **0.2 to 0.5 x DC** the rpm can be calculated with the following fomula:

$$n = \frac{v_C \times 1000}{DC \times \pi}$$



When ball milling the effective milling diameter $\mathbf{d_{eff.}}$ must be determined using the following formula:

Ball nose milling cutters

$$d_{eff.} = 2 \times \sqrt{a_p \times (DC - a_p)}$$



$$d_{eff.} = DC \times \sin\left(\beta \pm \arccos\left(\frac{DC - 2a_p}{DC}\right)\right)$$



Torus end milling cutters

$$d_{eff.} = (DC - 2RE) + 2 \times \sqrt{a_p \times (2RE - a_p)}$$



Information concerning plunge and draw milling

(1) When machining the profile flanks relatively high feed rates are possible as the cutting depth is relatively low (area highlighted in blue).

(2) A large increase in cutting depth occurs when the base of the profile is reached. Here the feed rate must be reduced as othwerwise tool breakage can occur due to vibrations, misalignment or chattering.

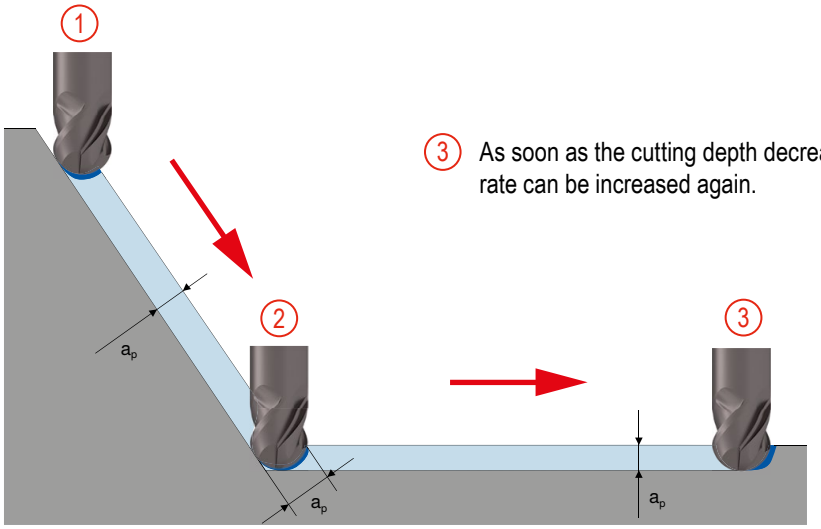

(3) As soon as the cutting depth decreases during the machining of the profile base, the feed rate can be increased again.

Rule:
The steeper the angle, the lower the feed rate. The shallower the angle, the larger the feed rate.

When plunge or draw milling dies, the feed rate has to be adapted to the various milling positions. Otherwise the cutting edge can be damaged due to overload (vibrations, misalignment or chattering).

Version description

CCR AL	Circular Cutter – Non-ferrous metals
CCR H	Circular Cutter – Tempered steel
CCR Ti	Circular Cutter – Heat-resistant alloys
CCR UNI	Circular Cutter – Universal
CCR VA	Circular Cutter – stainless steels
H	For high-strength steels and tempered materials
HR	For high-strength steels and tempered materials – with roughing profile
N	For machining steel and cast materials, as well as stainless steels
NR	For machining steel and cast materials, as well as stainless steels – with roughing profile
NTR	For machining steel and cast materials, as well as stainless steels – with trapezoidal chip breakers
SC UNI	Soft Cut – Universal
SC NR	Soft Cut – with round cord profile
W	For soft materials and non-ferrous metals (aluminium, copper, brass)
WF	For soft materials and non-ferrous metals (aluminium, copper, brass) – with roughing-finishing profile
WR	For soft materials and non-ferrous metals (aluminium, copper, brass) – with roughing profile

MonsterMill

FRP	Fibre Cutter
FRP CR	Fibre cutter – with length-independent compression zone
HCR	Hard Cutter
ICR	Inox Cutter
MCR	Multi Cutter
NCR	Nickel Alloy Cutter
PCR ALU	Plunging Cutter – Non-ferrous metals
PCR UNI	Plunging Cutter – Universal
SCR	Steel Cutter
TCR	Titanium Cutter

Deburring cutters

KEL	Round cone (shape L)
KSJ	Conical 60" (shape J)
KSK	Conical 90" (shape K)
KUD	Spherical (shape D)
RBF	Round arch (shape F)
SKM	Tapered cone (shape M)
SPG	Ogival (shape G)
TRE	Droplet (shape E)
WKN	Angular without spur gearing (shape N)
WRC	Round roller (shape C)
ZYA	Cylindrical without spur gearing (shape A)

Coatings

APA72S
- AlCrN multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1100 °C

APB72S
- Special nanolayer coating
- $HV_{0.05}$ = 3300
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 900 °C

APX72S
- Special nanolayer coating
- $HV_{0.05}$ = 3800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 1100 °C

CTC5240
- TiB2-based coating
- HIT 43 GPa ~ 4300 $HV_{0.05}$
- Friction value against steel 0.3
- Maximum application temperature 1000 °C

CTPX225
- AlTiN-based coating
- HIT 35 GPa ~ 3500 $HV_{0.05}$
- Friction value against steel 0.5
- Maximum application temperature 1000 °C

DIAMOND
- Diamond monolayer coating
- $HV_{0.025}$ = 10,000
- Coefficient of friction (against steel) = 0.2
- Maximum application temperature: 700 °C

DLC
- Diamond-like carbon coating
- Specially for machining non-ferrous metals
- Maximum application temperature: 400 °C

DPA52S
- Special nanolayer coating
- $HV_{0.05}$ = 3400
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1100 °C

DPA72S
- Special nanolayer coating
- $HV_{0.05}$ = 3200
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1000 °C

DPB72S
- TiAlCrN multilayer coating
- $HV_{0.05}$ = 3200
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1000 °C

DPX22S
- TiSiXN multilayer coating
- Layer hardness: H_{IT} [GPa] 38
- Maximum application temperature: 1100 °C

DPX52S
- TiSiN multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 1000 °C

DPX62S
- TiAlN multilayer coating
- $HV_{0.05}$ = 3800
- Coefficient of friction (against steel) = 0.4
- Maximum application temperature: 800 °C

DPX62U
- Special TiAlN coating
- $HV_{0.05}$ = 4000
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 1150 °C

DPX72S
- Special multilayer coating
- $HV_{0.05}$ = 3400
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 900 °C

Ti28
- Ti multilayer coating
- $HV_{0.05}$ = 2800
- Coefficient of friction (against steel) = 0.1
- Maximum application temperature: 500 °C

Ti40
- Ti monolayer coating
- $HV_{0.05}$ = 4000
- Maximum application temperature: 900 °C

Ti400
- Ti multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 400 °C

Ti1000
- Ti monolayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.3
- Maximum application temperature: 800 °C

Ti1001
- Ti monolayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.6
- Maximum application temperature: 800 °C

Ti1050
- Ti multilayer coating
- $HV_{0.005}$ = 3300
- Coefficient of friction (against steel) = 0.3-0.5
- Maximum application temperature: 900 °C

Ti1100
- Ti multilayer coating
- $HV_{0.05}$ = 3200
- Coefficient of friction (against steel) = 0.35
- Maximum application temperature: 1100 °C

Ti1200
- Ti nanolayer coating
- Maximum application temperature: 1100-1200 °C

Ti1500
- Ti nanolayer coating
- $HV_{0.05}$ = 3400
- Coefficient of friction (against steel) = 0.7
- Maximum application temperature: 900 °C

Ti2000
- Ti multilayer coating
- $HV_{0.05}$ = 3500
- Coefficient of friction (against steel) = 0.5
- Maximum application temperature: 900 °C

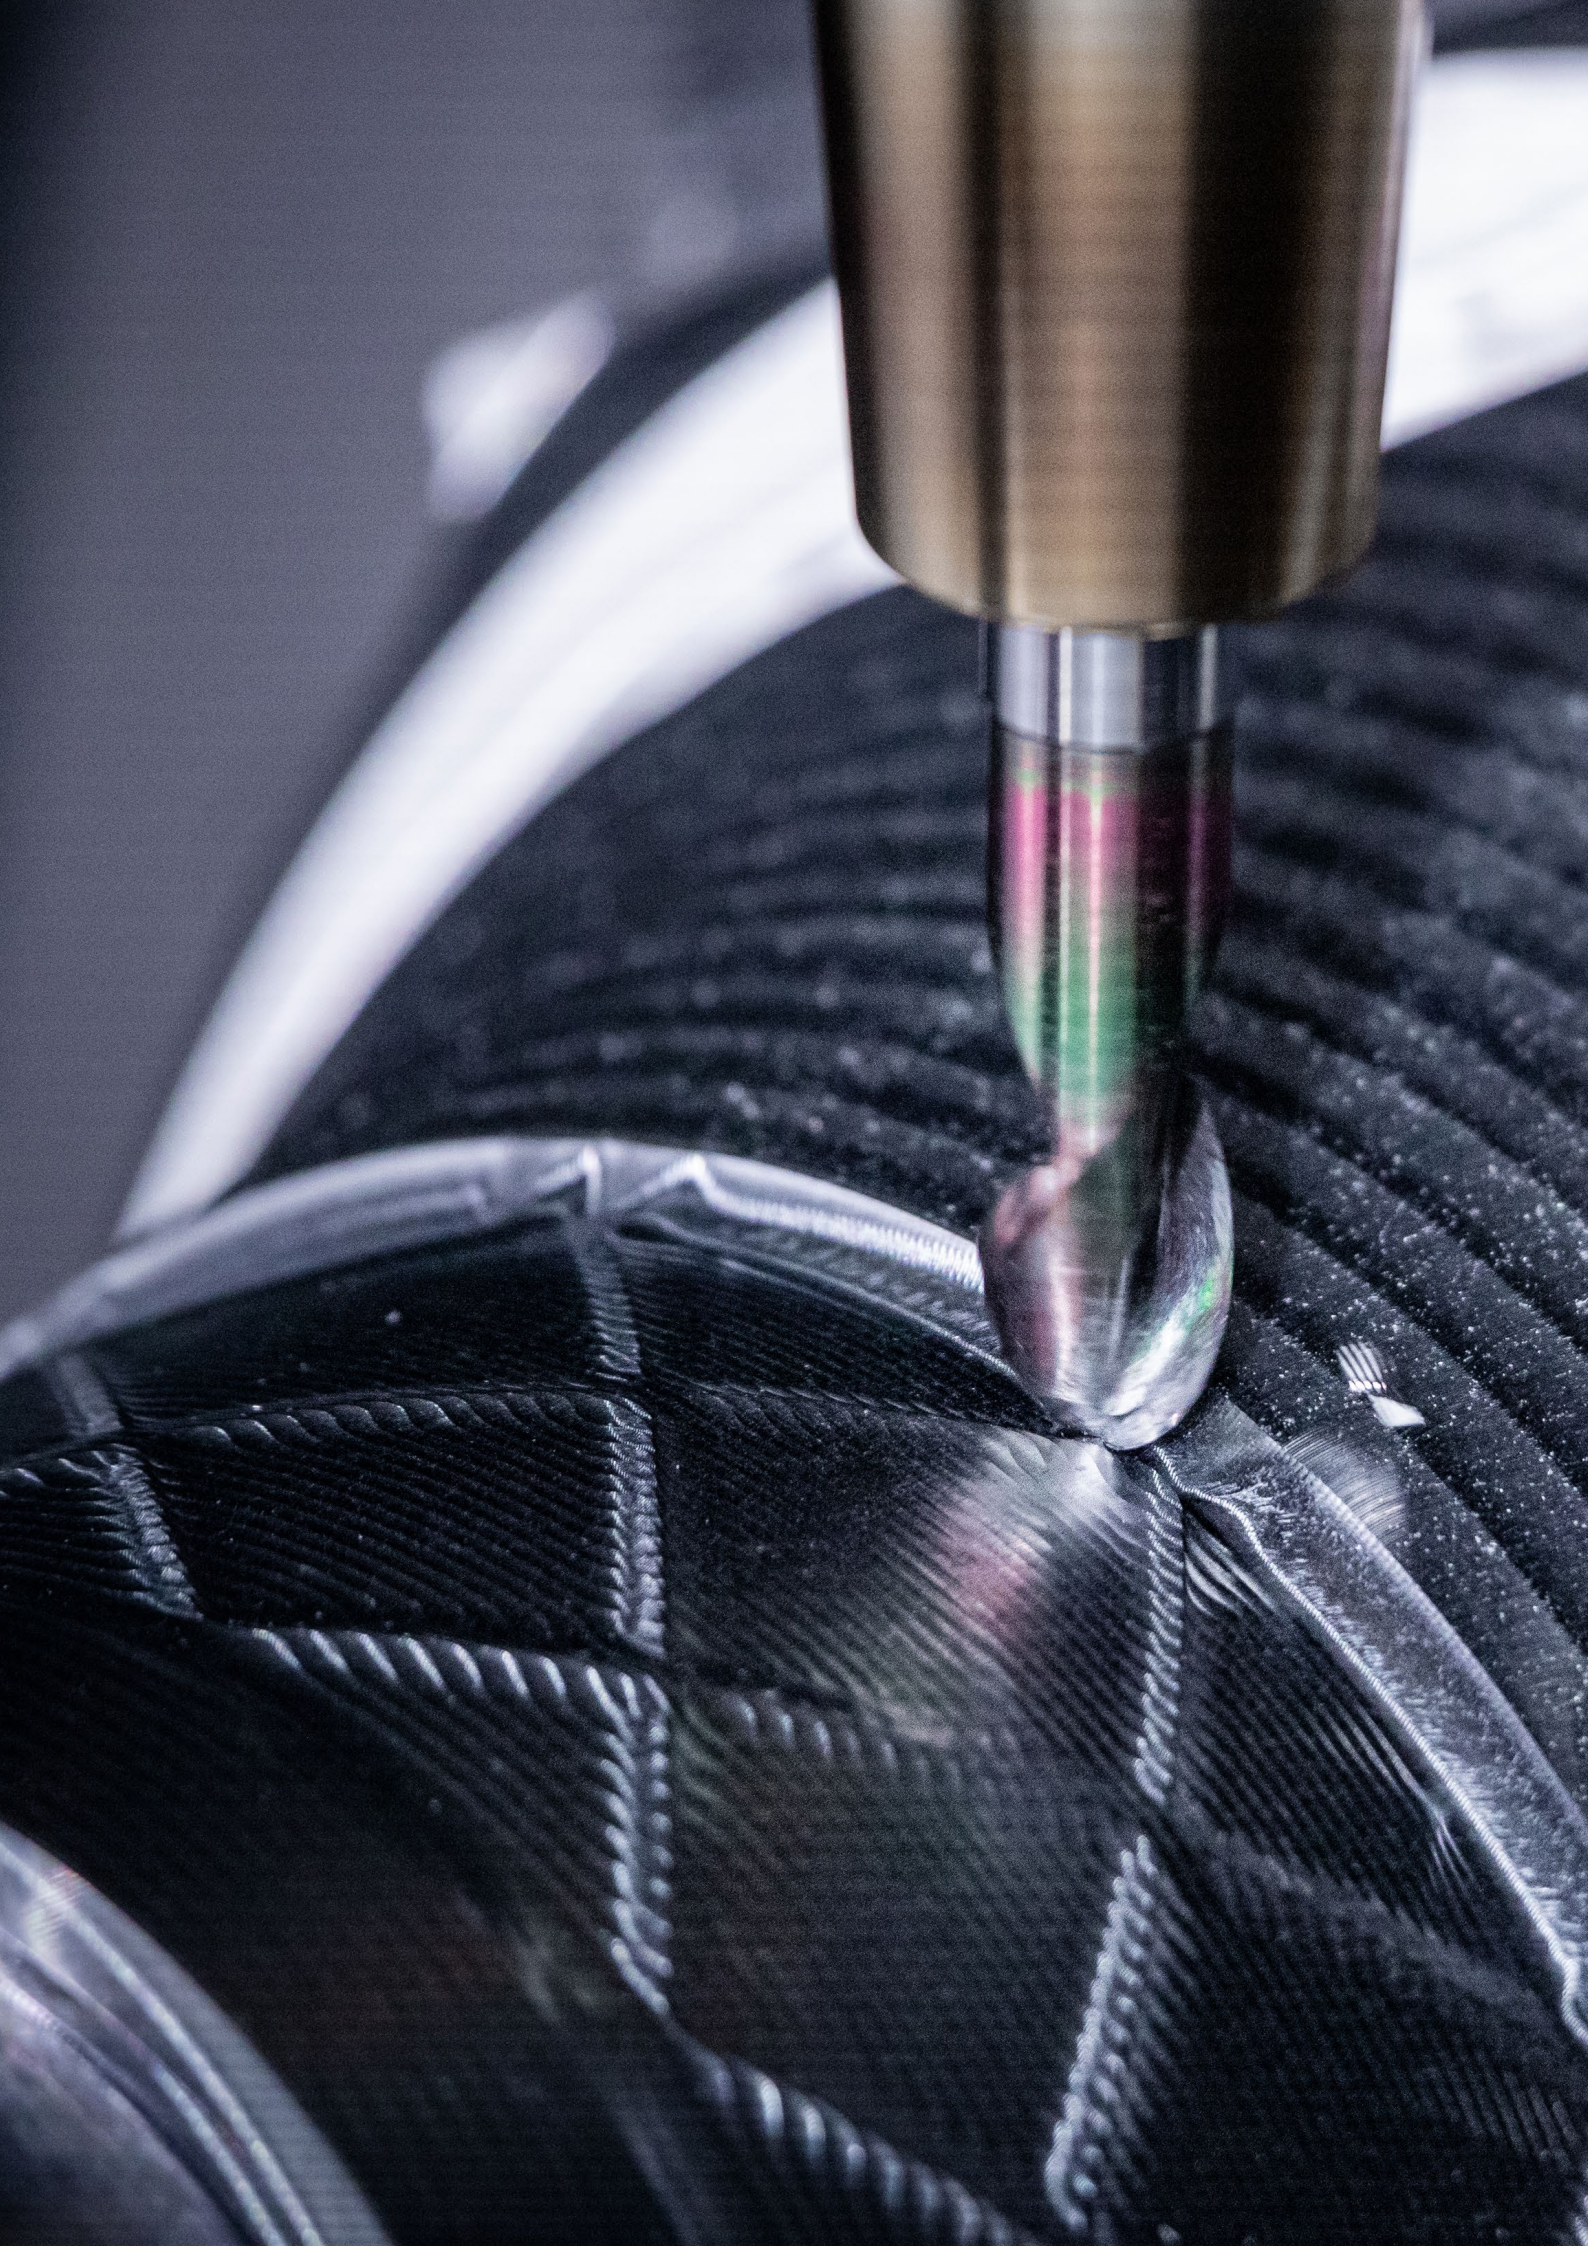

New products for machining technicians

NEW

MaxiMill Slot-SX

→ Page 126–141

New side and face milling system with SX inserts from SX grooving system

---

NEW

MaxiMill 242

→ Page 90

Update to chamfer milling cutter

NEW

MaxiMill 490

→ Page 78+80

Update to adjustable single angle milling cutter

NEW

CTPX715

New multi-range grade

NEW

MaxiMill 273-08

→ Page 35+36

NEW

MaxiMill 252

→ Page 115+116

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation	4
Toolfinder	5–12
Product programme	13–144
Technical Information	
Cutting data standard values	145–148
Application parameters – Face milling	149–158
Application parameters – End milling	159–175
Application parameters – Form milling	176–190
Application parameters – Other milling systems	191+192
Power Screw	193
Abbreviations & dimensions	194
Engagement conditions	195
ISO Designation System	196+197
Cutting Edge Wear Conditions	198
Chip Breakers Overview	199
Chip breaker description	200+201
Grades Overview	202+203
Grade description	204–209

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Symbol explanation

central internal coolant

lateral internal coolant

Cutting edge angle

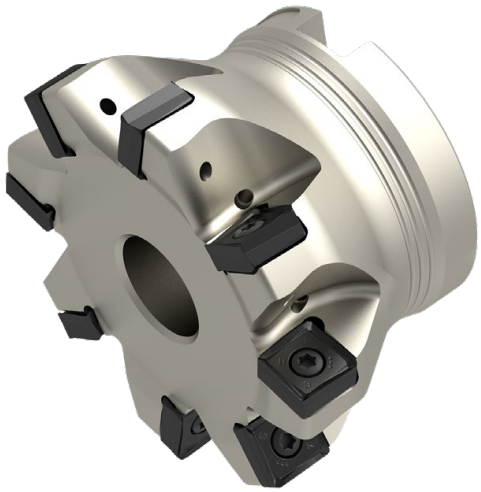

ZNF = Number of flutes

● = **Main Application**

○ = Extended application

Application symbols

Face milling

Angled ramping

Helical plunging

Axial ramping

Plunge milling

Slot milling

Shoulder milling

Slot milling (45°)

Chamfer milling

Free form milling

Toolfinder – Application Selection Guide

Form milling
→ System Selection:
10+11

Face milling
→ System Selection:
6+7

Chamfer/Angle milling cutters
→ System Selection:
12

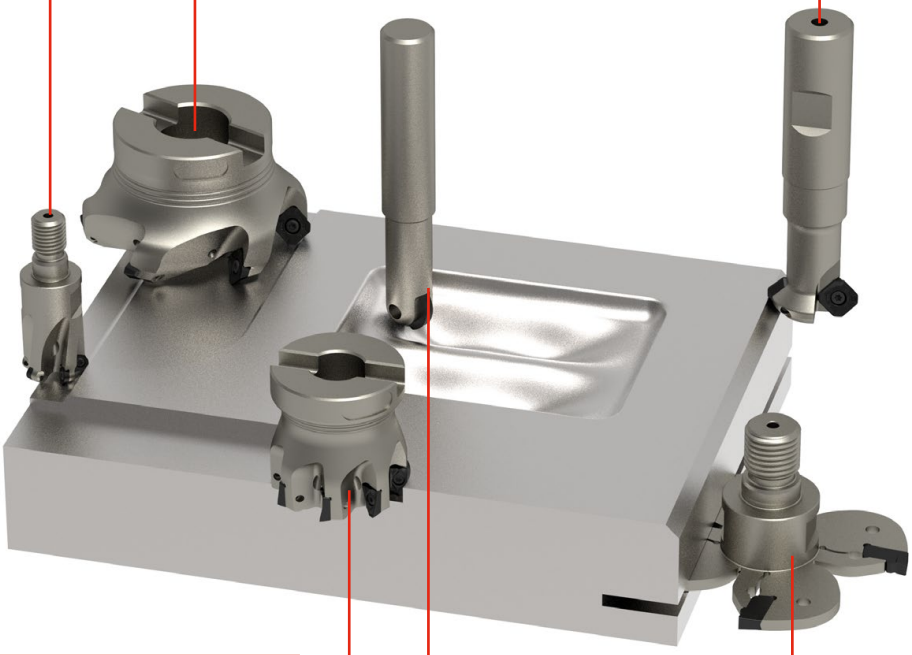

Shoulder milling
→ System Selection:
8+9

Slot milling and saws
→ System Selection:
12

Form milling
→ System Selection:
10+11

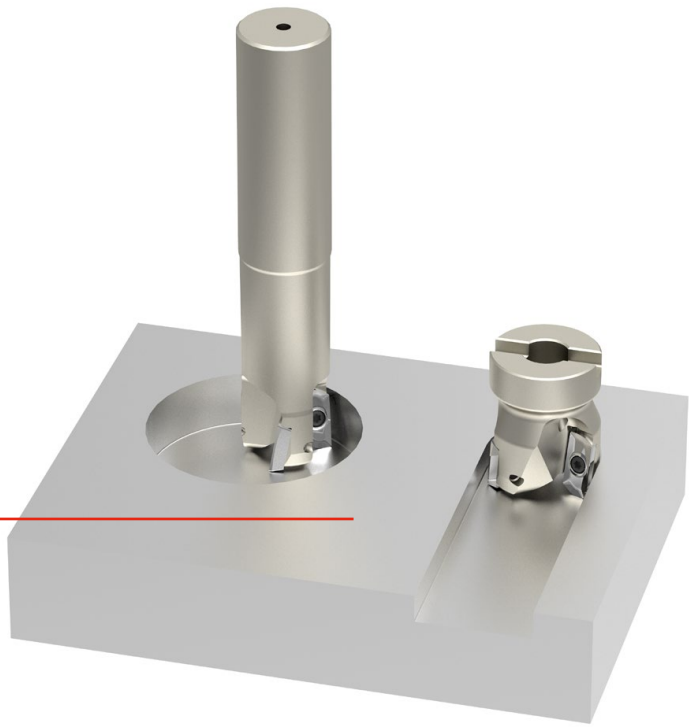

HSC-/HPC-milling
→ System Selection:
8+9

15

Toolfinder – Face Milling Cutters

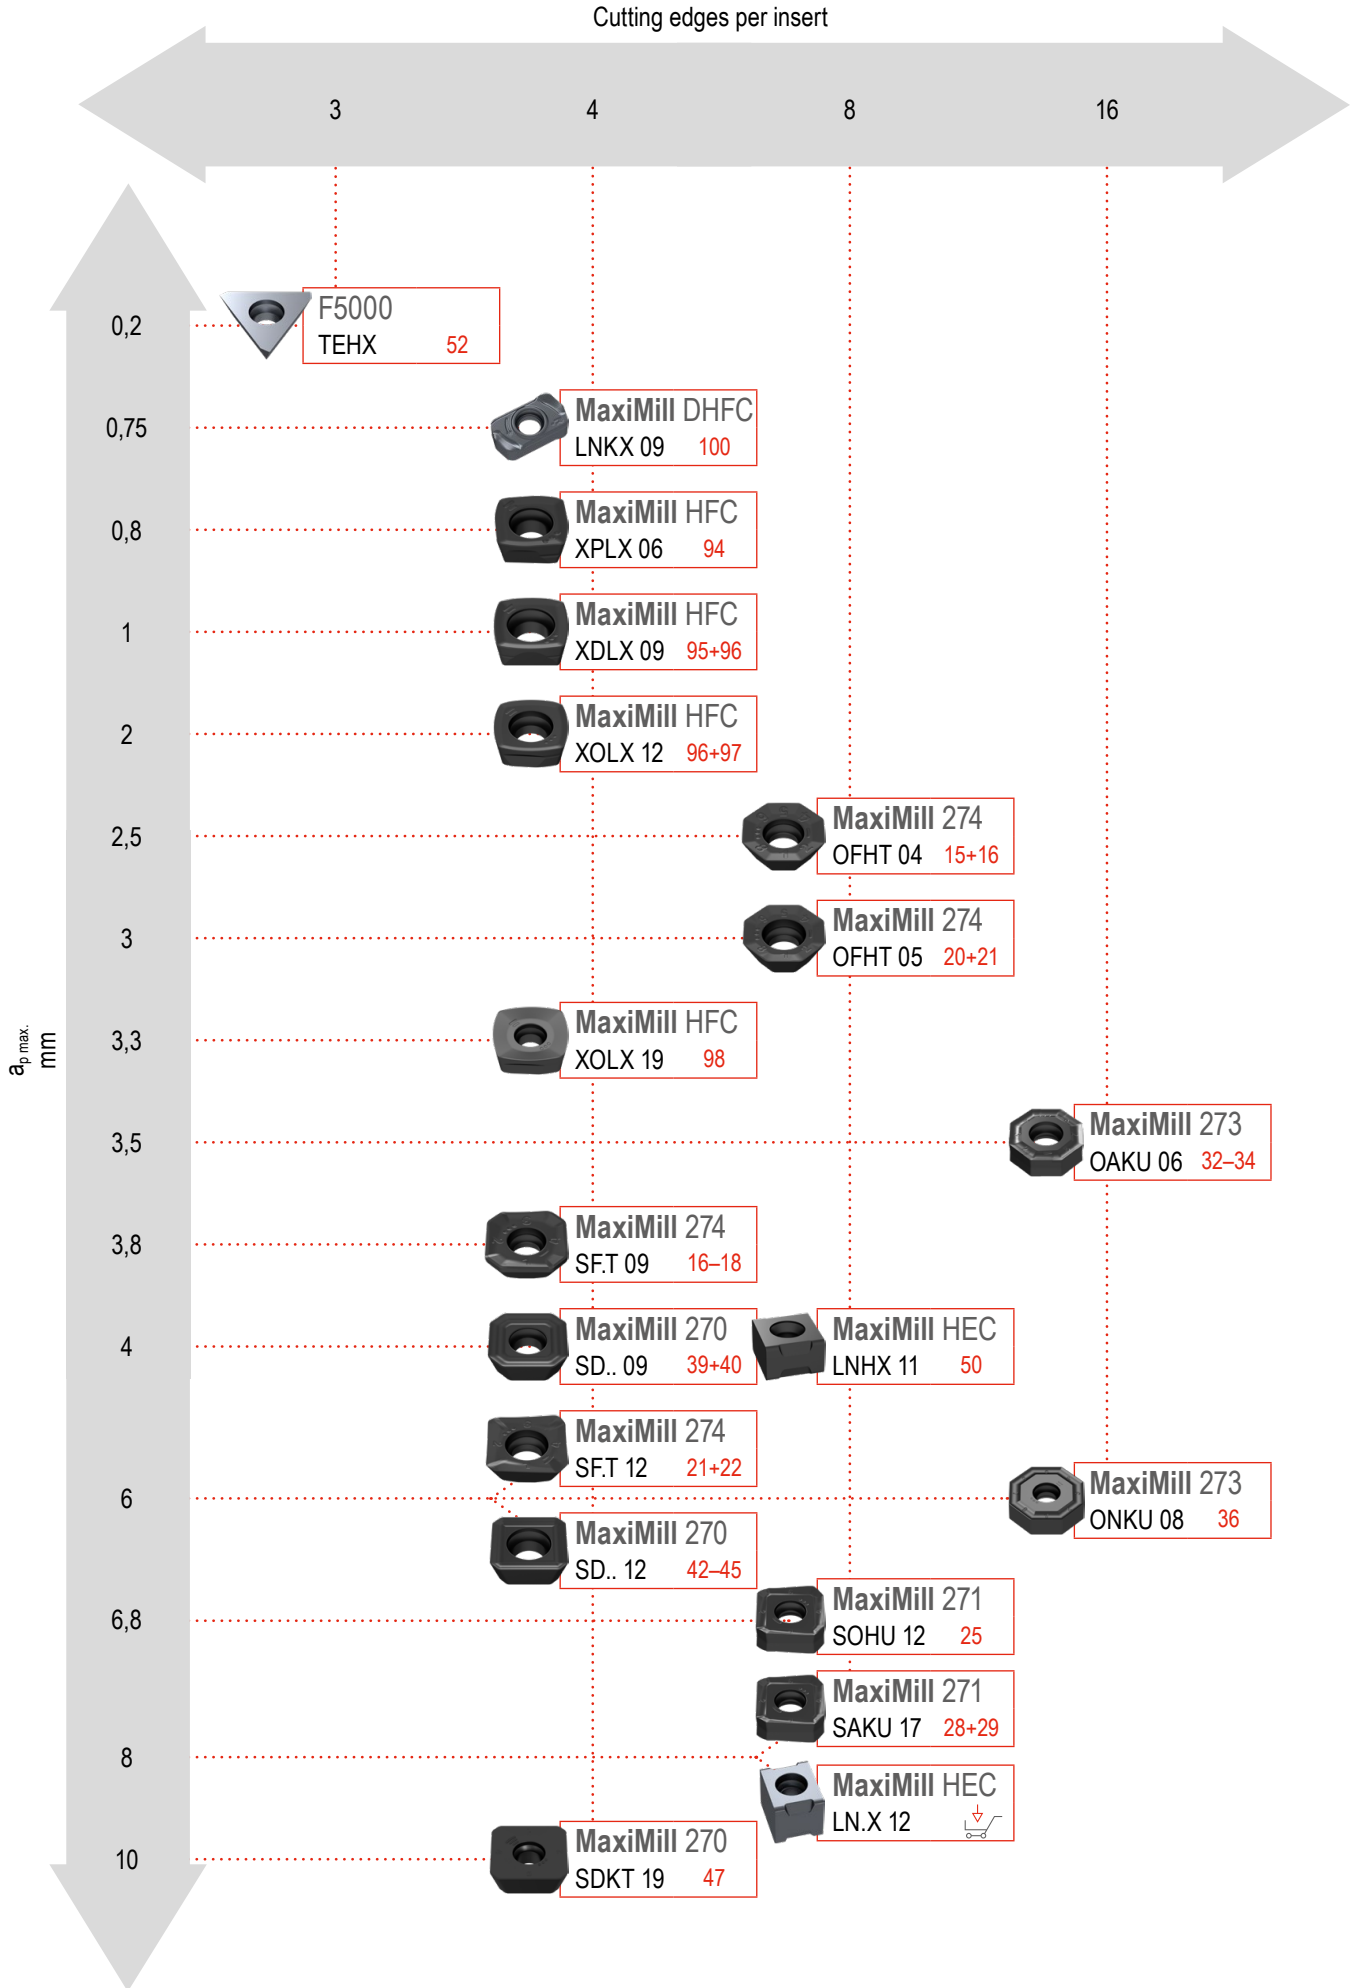

Overview – Face Milling Cutters

System	Inserts	Cutting edges per insert	$a_{p\,max.}$ mm	Ø-range mm			Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Page No.
MaxiMill 274	**OFH.** 04.. / 05.. | **SF.T** 09.. / 12..	8 | 4	2,5–6	Ø 20–32	Ø 20–32	Ø 32–160	●	●	●	●	●		○	13–22
MaxiMill 271	**SOHU** 1204.. | **SAKU** 1706..	8	6,8 | 8,4		Ø 32–40	Ø 40–250	●	●	●		●			23–29
MaxiMill 273	**OAKU** 0605.. | **ONKU** 0806..	16	3,5 | 6			Ø 40–250	●	●	●		●			30–36
MaxiMill 270	**SD..** 0903.. / 1204.. / 19..	4	4–10		Ø 6–32	Ø 32–315	●	●	●	●	●			37–47
MaxiMill HEC	**LNHX** 1106..	8	4–8			Ø 50–160	●		●				○	48–50
MaxiMill HEC	**LN.X** 1210..	8	4–8			Ø 125–160		●						
F 5000	**TEHX** 16T3..	3	0,2			Ø 42–100	●	●	●			●		51+52
MaxiMill HFC	**X..X** 06.. / 09.. / 12.. / 19..	4	0,8–3,3	Ø 16–42	Ø 16–35	Ø 32–160	●	●	●		●			92–98
MaxiMill DHFC	**LNKX** 09..	4	0,75	Ø 16–42	Ø 16–20		●	●	●		○			99+100

Additional diameters are available upon request.

Indexable inserts for systems that are no longer listed here can be found in our online shop at cuttingtools.ceratizit.com

15

Toolfinder – shoulder milling

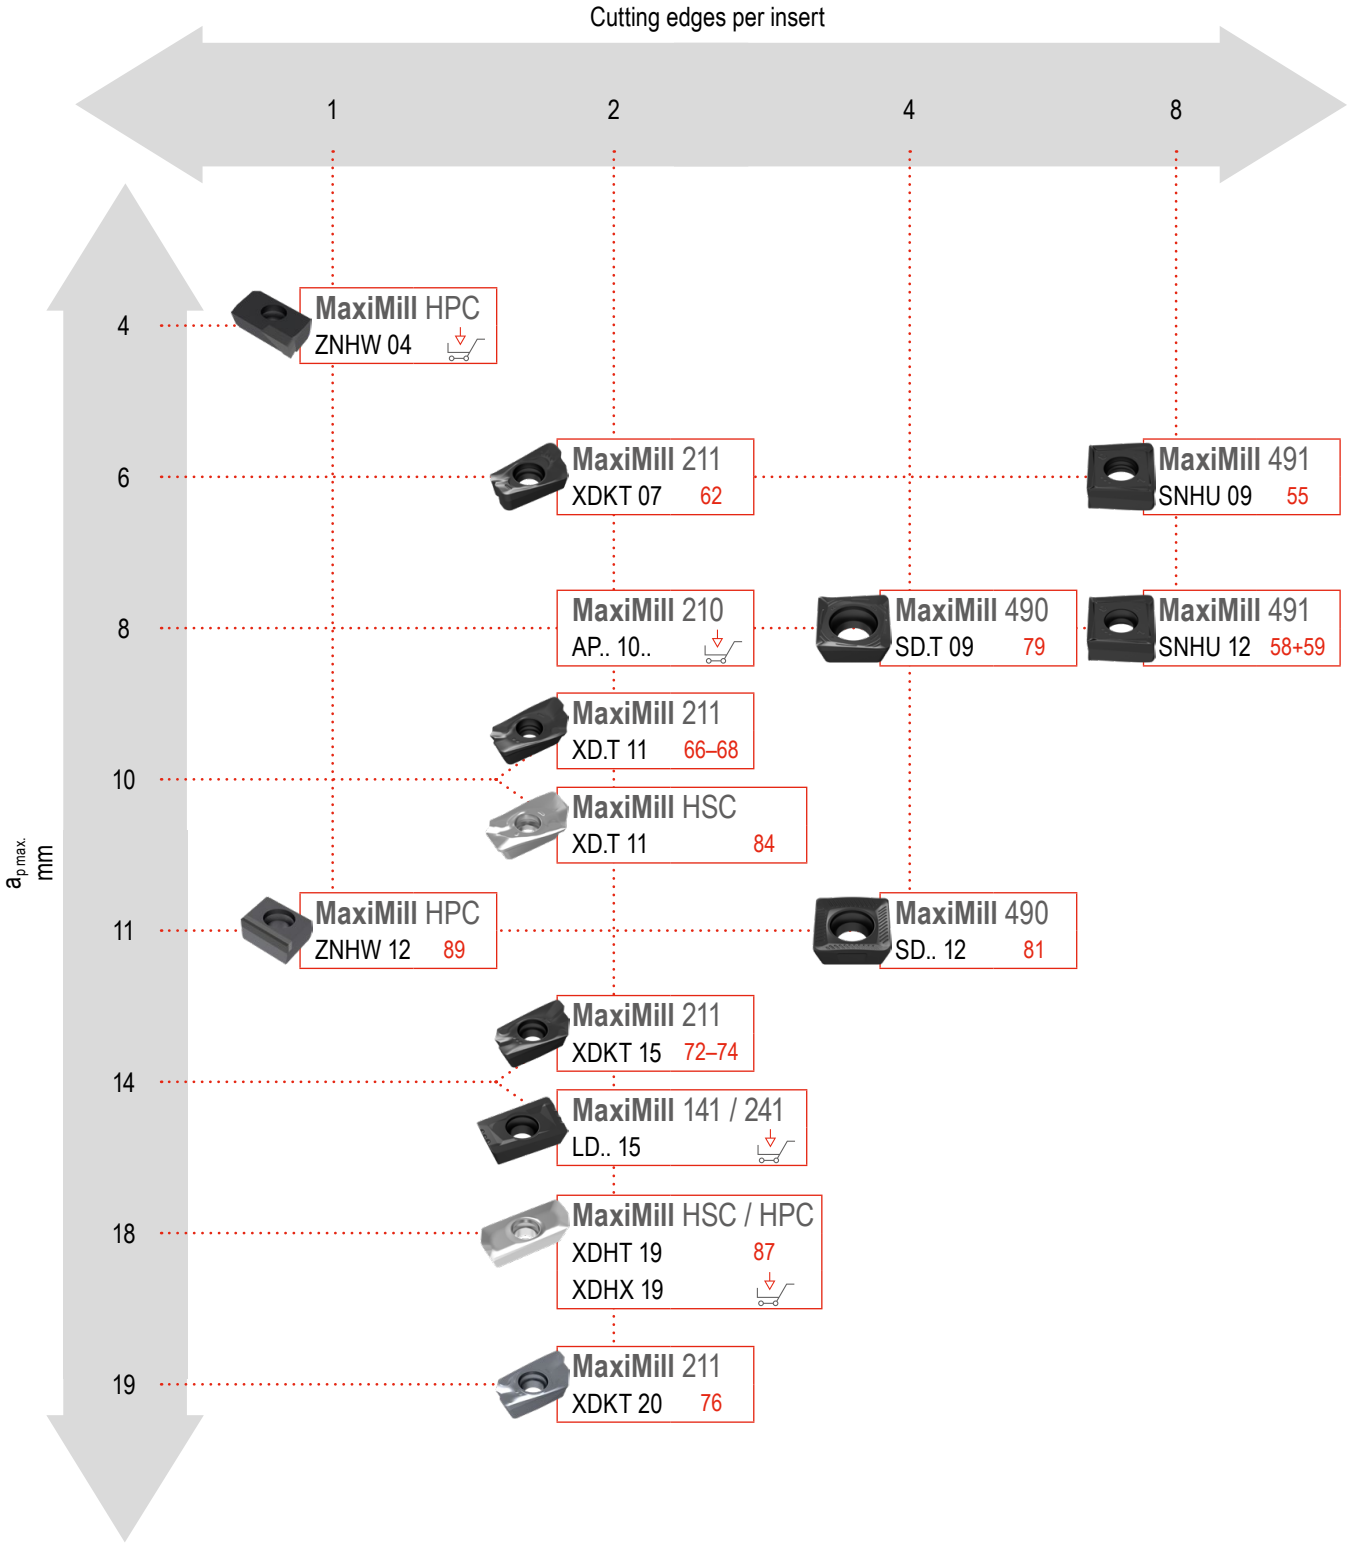

Overview – Shoulder Milling Cutters

System	Inserts	Cutting edges per insert	$a_{p\,max.}$ mm	Ø-range mm			Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Page No.
MaxiMill 491	**SNHU** 09T3.. / 1204..	8	6–8	Ø 25–32	Ø 25–32	Ø 40–160	●	●	●	●	●		○	53–59
MaxiMill 211	**XD.T** 0703.. / 11T3.. / 1505.. / 2007..	2	6–19	Ø 16–40	Ø 10–40	Ø 32–160	●	●	●	●	●	●	○	60–76
MaxiMill 211KN	**XD.T** 11T3.. / 1505.. / 2007..	2	27–75,5		Ø 25–50	Ø 40–80	●	●	●	●	●		○	65+71
MaxiMill 490	**SD..** 09T3.. / 1205..	4	8–11	Ø 25–32	Ø 25–32	Ø 40–125	●	●	●	●	●		○	77
MaxiMill 490K	**SD..** 09T3..	4	41			Ø 40–63	●	●	●	●	●		○	78
MaxiMill HSC	**XD..** 11T3.. / 1904..	2	10–18	Ø 16–40	Ø 16–32	Ø 40–125		○	●				○	82–87
MaxiMill HPC	**XD..** 1904..	2	10–18		Ø 22–32	Ø 40–63	Ø 25–50		○	●				○	
MaxiMill HPC	**ZNHW** 1205..	1	4–11			Ø 40–315			●	●		○	○	88+89
MaxiMill HPC	**ZNHW** 04T3..	1	4–11	Ø 20–40	Ø 20–40				●	●		○	○	
MaxiMill 210	**AP..** 1003..	2	8			Ø 40–80	●	●	●	●	●	●	○	

Additional diameters are available upon request.

Indexable inserts for systems that are no longer listed here can be found in our online shop at cuttingtools.ceratizit.com

This article can be found in our online shop at cuttingtools.ceratizit.com

15

Toolfinder – form milling

MaxiMill HFC 92–98

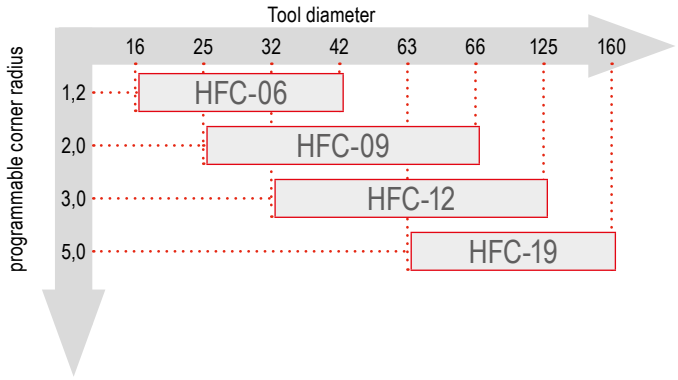

MaxiMill 252 115+116

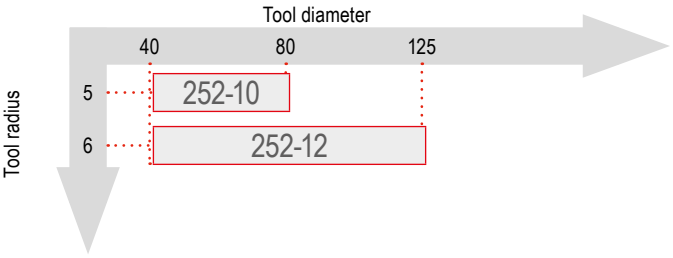

MaxiMill DHFC 99+100

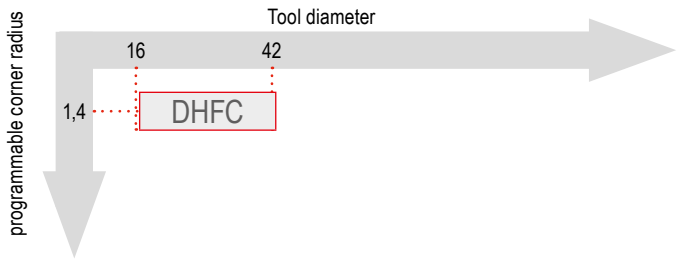

K200. Ball Nosed 117–121

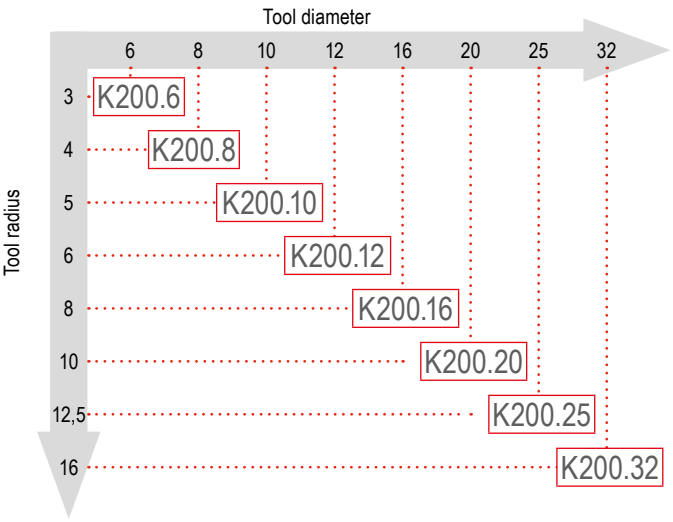

MaxiMill 251 RS 101–109

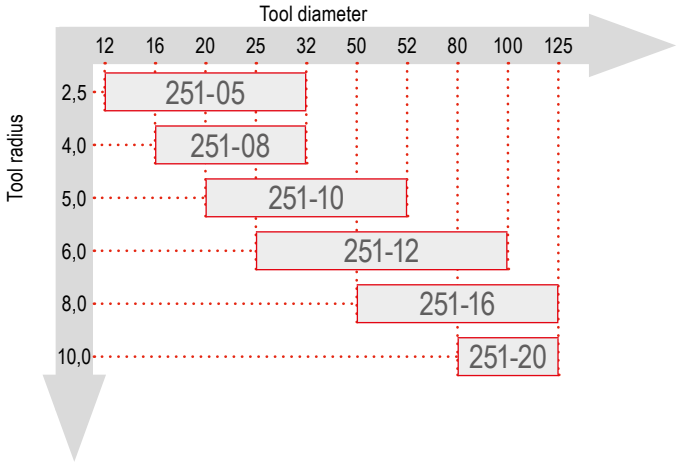

K200. Torus 122–125

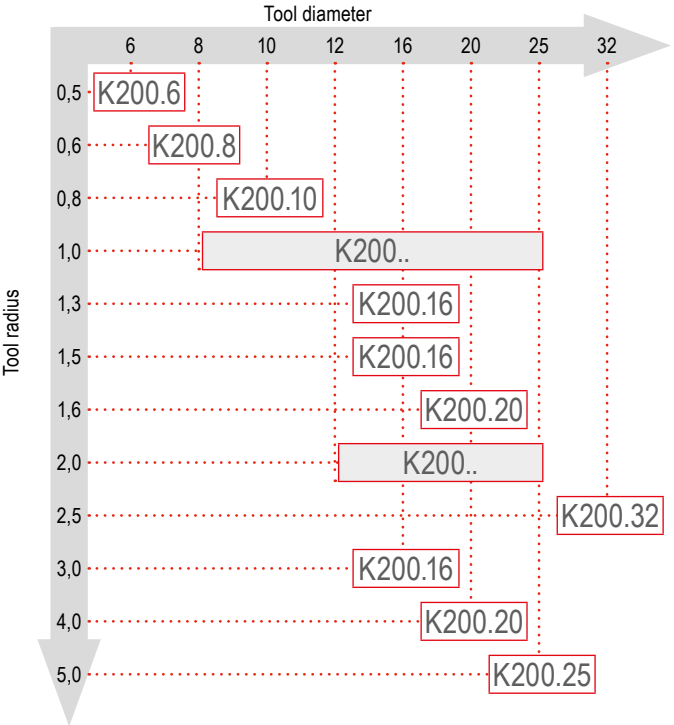

R100. 110–114

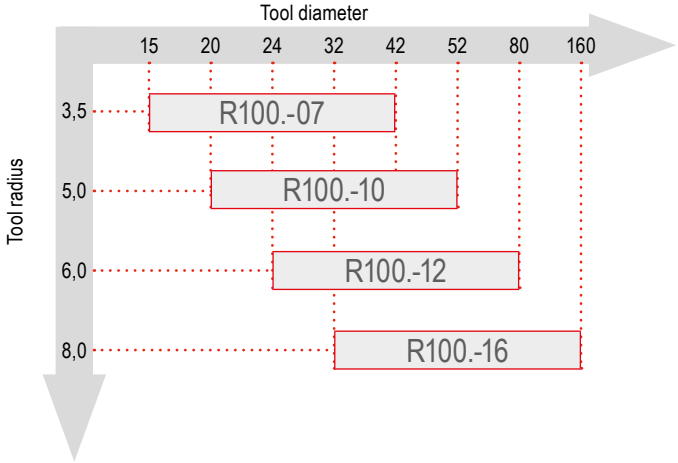

Application range

Tool diameter

Overview – form milling

System	Inserts	Cutting edges per insert	$a_{p\,max.}$ mm	Ø-range mm			Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Page No.
MaxiMill HFC	**X.LX** 06.. / 09.. / 12.. / 19..	4	0,8–3,3	Ø 16–42	Ø 16–35	Ø 32–160	●	●	●		●			92–98
MaxiMill DHFC	**LNKX** 09..	4	0,75	Ø 16–42	Ø 16–20		●	●	●		○			99+100
MaxiMill 251 RS	**R..X** 05.. / 08.. / 10.. / 12.. / 16.. / 20..	8	2,5–10	Ø 10–42	Ø 10–32	Ø 40–125	●	●	●	●	●		●	101–109
R100.	**RD.X** 07.. / 10.. / 12.. / 16..	8	5	Ø 15–42	Ø 15–20	Ø 42–160	●	●	●	●	●	●	○	110–114
MaxiMill 252	**RNHU** 10.. / 12..	8	3			Ø 40–125	●	●	○		●			115+116
K200. Ball Nosed	**RO.X** .... / **XOHX**	1	0,4–8	Ø 8–32	Ø 6–32		●	●	●	●	○	●	●	117–121
K200. Torus	**XO.X**	1	0,5–8	Ø 8–32	Ø 8–32		●	●	●	●	○	○	●	122–125

Additional diameters are available upon request.

Indexable inserts for systems that are no longer listed here can be found in our online shop at cuttingtools.ceratizit.com

15

Overview – Chamfer / Angle Milling Cutters

System	Inserts	Cutting edges per insert	$a_{p\,max.}$ mm	Ø-range mm		Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Page No.
MaxiMill 272	**SD..** 0903..	4	4	Ø 6–25		●	●	○	●	●			38–40
MaxiMill 242	**LD..** 1504..	2			Ø 50–92	●	●	●	●	○		○	90+91
MaxiMill 490	**SD..** 09T3.. / 1205..	4	6–11	Ø 20,1–31,5		●	●	●	●	●		○	78–81

Additional diameters are available upon request.

Overview – Saw cutters

System	Inserts	Cutting edges per insert	$a_{p\,max.}$ mm	Ø-range mm			Steel	Stainless steel	Cast iron	Non-ferrous metals	Heat-resistant	Tempered steel	Non-metal materials	Page No.
MaxiMill Slot-SX	**SX** E...	1	115	Ø 63–100	Ø 80–315		●	●	●	●	●		○	126–141
TX	**TX..** R/L	3	64		Ø 80–160	Ø 100–200	●	●	●	●	○		○	142–144

Additional diameters are available upon request.

MaxiMill – 274-04/-09 Screw in cutter



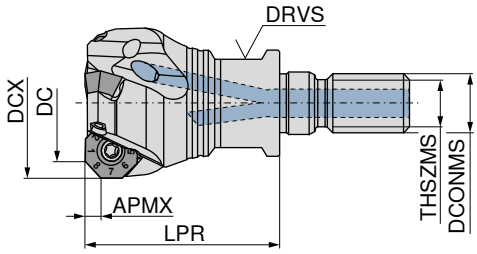

Designation	DC mm	DCX mm	ZNF	APMX mm	LPR mm	THSZMS	DCONMS mm	DRVS mm	torque moment Nm	Insert	50 742 ... EUR 2B/40	
G274.20.R.03-09	20	25,8	3	3,8	35	M12	12,5	17	1,2	OF.. 0403 / SF.. 0903	339,00	020
G274.25.R.04-09	25	30,8	4	3,8	35	M12	12,5	17	1,2	OF.. 0403 / SF.. 0903	386,20	025
G274.32.R.05-09	32	37,9	5	3,8	35	M16	17,0	24	1,2	OF.. 0403 / SF.. 0903	433,40	032

MaxiMill – 274-04/-09 End milling cutter



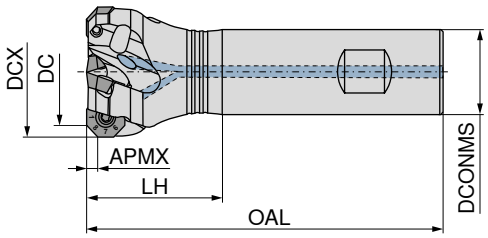

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS mm	torque moment Nm	Insert	50 743 ... EUR 2B/40		50 743 ... EUR 2B/40	
C274.20.R.03-09-A/B20-25	20	25,8	3	3,8	77	25	20	1,2	OF.. 0403 / SF.. 0903	339,00	020	339,00	120
C274.25.R.04-09-A/B20-32	25	30,8	4	3,8	84	32	20	1,2	OF.. 0403 / SF.. 0903	386,20	025	386,20	125
C274.32.R.05-09-A/B25-40	32	37,9	5	3,8	98	40	25	1,2	OF.. 0403 / SF.. 0903	433,40	032	433,40	132

MaxiMill – 274-04/-09 Shell mill







Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	torque moment Nm	Insert	50 744 ... EUR 2B/40		50 744 ... EUR 2B/40	
A274.32.R.05-09	32	37,9	5	3,8	40	38	16	1,6	OF.. 0403 / SF.. 0903			433,40	**032**
A274.40.R.04-09	40	46,0	4	3,8	40	38	16	1,6	OF.. 0403 / SF.. 0903	433,40	**040**		
A274.40.R.06-09	40	46,0	6	3,8	40	38	16	1,6	OF.. 0403 / SF.. 0903			480,50	**140**
A274.50.R.05-09	50	55,9	5	3,8	40	48	22	1,6	OF.. 0403 / SF.. 0903	504,20	**050**		
A274.50.R.07-09	50	55,9	7	3,8	40	48	22	1,6	OF.. 0403 / SF.. 0903			527,90	**150**
A274.63.R.06-09	63	68,9	6	3,8	40	48	22	1,6	OF.. 0403 / SF.. 0903	575,00	**063**		
A274.63.R.09-09	63	68,9	9	3,8	40	48	22	1,6	OF.. 0403 / SF.. 0903			645,90	**163**
A274.80.R.07-09	80	85,9	7	3,8	50	58	27	1,6	OF.. 0403 / SF.. 0903	645,90	**080**		
A274.80.R.11-09	80	85,9	11	3,8	50	58	27	1,6	OF.. 0403 / SF.. 0903			740,30	**180**
A274.100.R.09-09	100	105,9	9	3,8	50	78	32	1,6	OF.. 0403 / SF.. 0903	796,50	**100**		
A274.100.R.13-09	100	105,9	13	3,8	50	78	32	1,6	OF.. 0403 / SF.. 0903			891,00	**200**
A274.125.R.12-09	125	130,9	12	3,8	63	88	40	1,6	OF.. 0403 / SF.. 0903	970,50	**125**		

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		80 397 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7	
20 - 32	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**133**	153,30	**191**
32 - 40	6,13	**043**	5,04	**040**	13,16	**125**	16,08	**151**	5,64	**303**	5,27	**133**	153,30	**191**
50 - 125	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**133**	153,30	**191**

Two insert types – ONE Cutter





OFHT / OFHW / SFHT / SFKT

Designation	IC	D1	L	BS	S	AN
	mm	mm	mm	mm	mm	°
OFH. 0403..	9,52	3,35	3,94	-	3,18	25
SF.T 0903..	9,80	3,35	9,00	2,25	3,50	25



OF..



SF.T

OFHT

	-F50 CTCP230 DRAGONSKIN	-M50 CTCP230 DRAGONSKIN	-F50 CTPP235 DRAGONSKIN	-M50 CTPP235 DRAGONSKIN
				
	F	M	F	M
	OFHT	OFHT	OFHT	OFHT
	51 002 ...	51 003 ...	51 002 ...	51 003 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
040305SN 0,5	20,72 005	20,72 005	20,72 105	20,72 105
P	●	●	●	●
M			○	○
K	○	○	○	○
N				
S				
H				
O				

OFHT / OFHW

	-F50 CTCM235 DRAGONSKIN	-F50 CTPM240 DRAGONSKIN	-M50 CTPM240 DRAGONSKIN	-F50 CTPM245 DRAGONSKIN	CTPM245 DRAGONSKIN	-F50 CTCM245 DRAGONSKIN	CTCM245 DRAGONSKIN
							
	F	F	M	F	F	F	F
	OFHT	OFHT	OFHT	OFHT	OFHW	OFHT	OFHW
	51 002 ...	51 002 ...	51 003 ...	51 002 ...	51 105 ...	51 002 ...	51 105 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1H/17	EUR 1H/17
040302EN 0,2					22,84 452		22,84 90201
040305SN 0,5	20,72 305	20,72 405	20,72 405	22,84 455		22,84 90501	
P	●	○	○	●	●	●	●
M	●	●	●	●	●	●	●
K							
N							
S						○	○
H							
O							

15

OFHT / OFHW

NEW

	-M50 CTCK215	-F10 CTPX715	-F10 CTWN215	-F50 CTC5240	CTC5240	-F50 CTCS245
	DRAGONSKIN	DRAGONSKIN		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
	M	F	F	F	F	F
	OFHT	OFHT	OFHT	OFHT	OFHW	OFHT
	51 003 ...	51 122 ...	50 459 ...	51 002 ...	50 457 ...	51 002 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1H/17
040302EN 0,2					22,84 504	
040305FN 0,5		26,02 00502	21,97 505			
040305SN 0,5	20,72 505			22,84 15500		22,84 555
P		○				
M		○				
K	●	●	○			
N		●	●			
S		○		●	●	●
H						
O		○	○			

SFHT / SFKT

	-F50 CTPP225	-M50 CTPP225
	DRAGONSKIN	DRAGONSKIN
	F	M
	SFHT	SFKT
	51 012 ...	51 013 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61
0903AFSR 1	20,72 070	15,27 070
P	●	●
M		
K		
N		
S		
H		
O		

SFHT / SFKT

		-F50 CTCP230 DRAGONSKIN	-M50 CTCP230 DRAGONSKIN	-F50 CTPP235 DRAGONSKIN	-M50 CTPP235 DRAGONSKIN
					
		F	M	F	M
		SFHT	SFKT	SFHT	SFKT
		51 012 ...	51 013 ...	51 012 ...	51 013 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
0903AFSR	1	20,72 020	15,27 020	20,72 120	15,27 120
P		●	●	●	●
M				○	○
K		○	○	○	○
N					
S					
H					
O					

SFHT / SFKT

		-F50 CTCM235 DRAGONSKIN	-F50 CTPM240 DRAGONSKIN	-M50 CTPM240 DRAGONSKIN	-F50 CTPM245 DRAGONSKIN	-F50 CTCM245 DRAGONSKIN
						
		F	F	M	F	F
		SFHT	SFHT	SFKT	SFHT	SFHT
		51 012 ...	51 012 ...	51 013 ...	51 012 ...	51 012 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
0903AFSR	1	20,72 320	20,72 420	15,27 42000	25,76 470	25,76 92001
P		●	○	○	●	●
M		●	●	●	●	●
K						
N						
S						○
H						
O						

15

SFKT / SFHT

		NEW				
		-R50 CTCK215	-R50 CTPK220	-F10 CTPX715	-F10 CTWN215	-F40 CTC5240
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN		DRAGONSKIN
						
		R	R	F	F	F
		SFKT	SFKT	SFHT	SFHT	SFHT
		51 065 ...	51 065 ...	51 123 ...	50 514 ...	50 514 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17
0903AFFR	1			24,84 01502	24,84 505	
0903AFSR	1	15,27 520	15,27 620			25,76 504
P				○		
M				○		
K		●	●	●	○	
N				●	●	
S				○		●
H						
O				○	○	

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 149
Starting Parameter	→ 150	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 274-05/-12 Shell mill





Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	torque moment Nm	Insert	50 772 ... EUR 2B/40		50 772 ... EUR 2B/40	
A274.40.R.03-12	40	48,0	3	6	40	38	16	3,2	OFHT 0504 / SFKT 1204	326,30	**24000**		
A274.40.R.04-12	40	48,0	4	6	40	38	16	3,2	OFHT 0504 / SFKT 1204			428,20	**04000**
A274.50.R.04-12	50	58,0	4	6	40	43	22	3,2	OFHT 0504 / SFKT 1204	434,90	**25000**		
A274.50.R.05-12	50	58,0	5	6	40	43	22	3,2	OFHT 0504 / SFKT 1204			543,70	**050**
A274.63.R.05-12	63	71,1	5	6	40	48	22	3,2	OFHT 0504 / SFKT 1204	557,00	**26300**		
A274.63.R.06-12	63	71,1	6	6	40	48	22	3,2	OFHT 0504 / SFKT 1204			652,50	**063**
A274.80.R.06-12	80	88,0	6	6	50	58	27	3,2	OFHT 0504 / SFKT 1204	679,50	**28000**		
A274.80.R.08-12	80	88,0	8	6	50	58	27	3,2	OFHT 0504 / SFKT 1204			870,00	**080**
A274.100.R.08-12	100	108,0	8	6	50	78	32	3,2	OFHT 0504 / SFKT 1204	897,20	**30000**		
A274.100.R.10-12	100	108,0	10	6	50	78	32	3,2	OFHT 0504 / SFKT 1204			1.074,00	**100**
A274.125.R.09-12	125	133,0	9	6	63	88	40	3,2	OFHT 0504 / SFKT 1204	1.125,00	**32500**		
A274.125.R.12-12	125	133,0	12	6	63	88	40	3,2	OFHT 0504 / SFKT 1204			1.311,00	**125**
A274.160.R.11-12	160	168,0	11	6	63	98	40	3,2	OFHT 0504 / SFKT 1204	1.367,00	**36000**[1)]		
A274.160.R.14-12	160	168,0	14	6	63	98	40	3,2	OFHT 0504 / SFKT 1204			1.740,00	**16000**[1)]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

Spare parts DC	TORX® blade 80 950 ... EUR Y7		Key D 80 950 ... EUR Y7		Molykote 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7	
40 - 160	6,78	**054**	15,33	**128**	5,64	**303**	5,95	**340**	170,10	**193**

Two insert types – ONE Cutter

OFHT / SFHT / SFKT

Designation	IC	D1	L	BS	S	AN
	mm	mm	mm	mm	mm	°
OFHT 0504..	12,7	4,8	4,5	-	4,76	25
SF.T 1204..	12,7	4,8	12,7	1,42	4,76	25



OF..



SF.T

OFHT

	-F50 CTCP230 DRAGONSKIN	-M50 CTCP230 DRAGONSKIN	-F50 CTPP235 DRAGONSKIN	-M50 CTPP235 DRAGONSKIN
	F	M	F	M
	OFHT	OFHT	OFHT	OFHT
	51 002 ...	51 003 ...	51 002 ...	51 003 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
050410SN / 1	22,79 **010**	22,79 **01000**	22,79 **110**	22,79 **11000**
P	●	●	●	●
M			○	○
K	○	○	○	○
N				
S				
H				
O				

OFHT

	-F50 CTCM235 DRAGONSKIN	-F50 CTPM240 DRAGONSKIN	-M50 CTPM240 DRAGONSKIN	-F50 CTPM245 DRAGONSKIN
	F	F	M	F
	OFHT	OFHT	OFHT	OFHT
	51 002 ...	51 002 ...	51 003 ...	51 002 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17
050410SN / 1	22,79 **310**	22,79 **410**	22,79 **41000**	25,11 **460**
P	●	○	○	●
M	●	●	●	●
K				
N				
S				
H				
O				

OFHT

		NEW			
		-F50 CTCM245	-F10 CTPX715	-F10 CTWN215	-F50 CTC5240
		DRAGONSKIN	DRAGONSKIN		DRAGONSKIN
					
		F	F	F	F
		OFHT	OFHT	OFHT	OFHT
		51 002 ...	51 122 ...	51 122 ...	51 002 ...
ISO	RE mm	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1H/17
050410FN	1		29,76 01002	27,32 36000	
050410SN	1	25,11 91001			25,11 16000
P		●	○		
M		●	○		
K			●	○	
N			●	●	
S		○	○		●
H					
O			○	○	

SFHT / SFKT

		-F50 CTCP230	-M50 CTCP230	-F50 CTPP235	-M50 CTPP235
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		F	M	F	M
		SFHT	SFKT	SFHT	SFKT
		51 012 ...	51 013 ...	51 012 ...	51 013 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
1204AFSR	1	22,79 02500	16,79 025	22,79 12500	16,79 125
P		●	●	●	●
M				○	○
K		○	○	○	○
N					
S					
H					
O					

15

SFHT / SFKT

		-F50 CTCM235	-M50 CTCM235	-F50 CTPM240	-M50 CTPM240
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		F	M	F	M
		SFHT	SFKT	SFHT	SFKT
		51 012 ...	51 013 ...	51 012 ...	51 013 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
1204AFSR	1	22,79 325	16,79 325	22,79 42500	16,79 425
P		●	●	○	○
M		●	●	●	●
K					
N					
S					
H					
O					

SFHT

			-F50 CTPM245	-F50 CTCM245	NEW -F10 CTPX715	-F10 CTWN215	-F40 CTC5240
			DRAGONSKIN	DRAGONSKIN	DRAGONSKIN		DRAGONSKIN
							
			F	F	F	F	F
			SFHT	SFHT	SFHT	SFHT	SFHT
			51 012 ...	51 012 ...	51 123 ...	51 123 ...	50 514 ...
ISO	RE mm		EUR 1H/17	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1H/17
1204AFER	1						28,36 50900
1204AFFR	1				29,76 02502	27,32 37000	
1204AFSR	1		27,80 47500	27,80 92501			
P			●	●	○		
M			●	●	○		
K					●	○	
N					●	●	
S				○	○		●
H							
O					○	○	

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 151
Starting Parameter	→ 152	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 271-12 End milling cutter



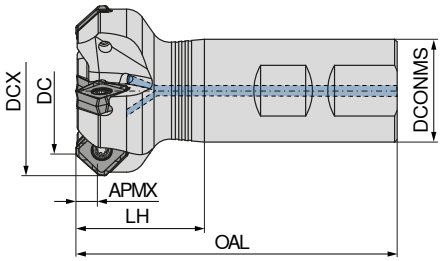

											50 786 ...	
Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS $_{h6}$ mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
C271.32.R.03-12-B-40	32	45	3	6,8	100	40	32	18400	3,2	SOHU 1204.. / XOHU 1204..	412,50	**03203**
C271.40.R.04-12-B32-40	40	53	4	6,8	100	40	32	16800	3,2	SOHU 1204.. / XOHU 1204..	515,50	**04004**

	TORX® blade		Key D		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		**80 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		2A/28		2A/28		Y7	
32 - 40	6,78	**054**	11,79	**120**	5,64	**303**	4,14	**859**	170,10	**193**

15

MaxiMill – 271-12 Face mill

▲ 8 cutting edges per insert





Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS H6 mm	RPMX 1/min.	torque moment Nm	Insert	50 787 ... EUR 2B/40		50 787 ... EUR 2B/40	
A271.40.R.04-12	40	53	4	6,8	40	38	16	17900	3,2	SOHU 1204.. / XOHU 1204..			515,50	**04004**
A271.50.R.05-12	50	63	5	6,8	40	43	22	15200	3,2	SOHU 1204.. / XOHU 1204..			528,40	**05005**
A271.63.R.07-12	63	76	7	6,8	40	48	22	13100	3,2	SOHU 1204.. / XOHU 1204..			670,20	**06307**
A271.80.R.06-12	80	93	6	6,8	50	58	27	11300	3,2	SOHU 1204.. / XOHU 1204..	670,20	**08006**		
A271.80.R.08-12	80	93	8	6,8	50	58	27	11300	3,2	SOHU 1204.. / XOHU 1204..			773,20	**08008**
A271.100.R.07-12	100	113	7	6,8	63	78	32	9900	3,2	SOHU 1204.. / XOHU 1204..	850,50	**10007**		
A271.100.R.10-12	100	113	10	6,8	63	78	32	9900	3,2	SOHU 1204.. / XOHU 1204..			966,60	**10010**
A271.125.R.08-12	125	138	8	6,8	63	88	40	8700	3,2	SOHU 1204.. / XOHU 1204..	1.031,00	**12508**		
A271.125.R.12-12	125	138	12	6,8	63	88	40	8700	3,2	SOHU 1204.. / XOHU 1204..			1.186,00	**12512**
A271.160.R.09-12	160	173	9	6,8	63	98	40	7600	3,2	SOHU 1204.. / XOHU 1204..	1.199,00	**16009**[1]		
A271.160.R.14-12	160	173	14	6,8	63	98	40	7600	3,2	SOHU 1204.. / XOHU 1204..			1.392,00	**16014**[1]
A271.200.R.11-12	200	213	11	6,8	63	132	60	6700	3,2	SOHU 1204.. / XOHU 1204..	1.503,00	**20011**[2]		
A271.200.R.17-12	200	213	17	6,8	63	132	60	6700	3,2	SOHU 1204.. / XOHU 1204..			1.698,00	**20017**[2]
A271.250.R.13-12	250	263	13	6,8	63	132	60	6000	3,2	SOHU 1204.. / XOHU 1204..	1.809,00	**25013**[2]		
A271.250.R.21-12	250	263	21	6,8	63	132	60	6000	3,2	SOHU 1204.. / XOHU 1204..			2.124,00	**25021**[2]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant
2) With threaded holes M16 on the front face, pitch circle diameter = 101.6 mm / Without Through Coolant

MaxiMill – 271-12 HFC Face mill





Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS H6 mm	RPMX 1/min.	torque moment Nm	Insert	50 788 ... EUR 2B/40	
A271.50.R.04-12-HFC	30	50	4	2,6	40	43	22	14600	3,2	SOHU 1204..	528,40	**05004**
A271.63.R.06-12-HFC	43	63	6	2,6	40	48	22	12500	3,2	SOHU 1204..	670,20	**06306**
A271.80.R.07-12-HFC	60	80	7	2,6	50	58	27	10800	3,2	SOHU 1204..	773,20	**08007**

TORX® blade

Clamping key – T

Key D

Power Screw

Molykote

Clamping screw

Torque screwdriver

Spare parts DC	80 950 ... EUR Y7		80 397 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7	
40 (5078704004)	6,78	**054**	5,04	**040**	11,79	**120**	16,08	**151**	5,64	**303**	4,14	**859**	170,10	**193**
50 - 250	6,78	**054**			11,79	**120**			5,64	**303**	4,14	**859**	170,10	**193**
50 (5078805004)	6,78	**054**	5,46	**050**	11,79	**120**	22,09	**154**	5,64	**303**	4,14	**859**	170,10	**193**

SOHU

Designation	IC mm	D1 mm	L mm	BS mm	S mm	AN °
SOHU 1204..	13,36	4,4	8,8	1,7	5,00	7,4



SOHU

SOHU

		-M50 CTCP230	-M50 CTPP235	-M50 CTCM235	-M50 CTPM240	-F50 CTPM245	-F50 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		SOHU	SOHU	SOHU	SOHU	SOHU	SOHU
		51 138 ...	51 138 ...	51 138 ...	51 138 ...	51 140 ...	51 140 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
1204ABSR	0,8	33,88 **02000**	33,88 **12000**	33,88 **32000**	33,88 **42000**	41,67 **47000**	41,67 **92001**
P		●	●	●	○	●	●
M			○	●	●	●	●
K		○	○				
N							
S							○
H							
O							

SOHU

		-R50 CTCK215	-R50 CTPK220	-F40 CTC5240	-F50 CTC5240
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		SOHU	SOHU	SOHU	SOHU
		51 139 ...	51 139 ...	51 148 ...	51 140 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
1204ABSR	0,8	33,88 **52000**	33,88 **62000**	41,67 **12001**	41,67 **17000**
P					
M					
K		●	●		
N					
S				●	●
H					
O					

15

XOHU

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XOHU 1204..	13,36	4,4	8,8	1,83	5,00



XOHU

XOHU

▲ Masterfinish indexable insert (sweeper insert)

-M50
CTPP235

DRAGONSKIN


XOHU

51 141 ...

ISO	RE	EUR	
	mm	1B/61	
1204ABSR	0,8	41,95	**12000**
P			●
M			○
K			○
N			
S			
H			
O			

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 153
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

MaxiMill – 271-17 Face mill

▲ 8 cutting edges per insert





Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS mm	DHUB mm	torque moment Nm	Insert	50 767 ... EUR 2B/40	
A271.50.R.04-17	50	66,1	4	8,4	40	22	43	5	SAKU 1706	502,90	**050**
A271.63.R.06-17	63	79,1	6	8,4	40	22	48	5	SAKU 1706	706,90	**063**
A271.80.R.07-17	80	96,1	7	8,4	50	27	58	5	SAKU 1706	808,80	**080**
A271.100.R.08-17	100	116,1	8	8,4	50	32	78	5	SAKU 1706	931,20	**100**
A271.125.R.10-17	125	141,1	10	8,4	63	40	88	5	SAKU 1706	1.074,00	**125**
A271.160.R.12-17	160	176,1	12	8,4	63	40	104	5	SAKU 1706	1.265,00	**16000**[1]
A271.200.R.13-17	200	216,1	13	8,4	63	60	134	5	SAKU 1706	1.563,00	**20000**[2]
A271.250.R.15-17	250	266,1	15	8,4	63	60	134	5	SAKU 1706	1.890,00	**25000**[2]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant
2) With threaded holes M16 on the front face, pitch circle diameter = 101.6 mm / Without Through Coolant

	TORX® blade	Key D	Molykote	Clamping screw	Torque screwdriver
	80 950 ...	80 950 ...	70 950 ...	70 950 ...	80 950 ...
Spare parts	EUR	EUR	EUR	EUR	EUR
DC	Y7	Y7	2A/28	2A/28	Y7
50 - 250	6,13 **037**	12,83 **114**	5,64 **303**	5,27 **302**	170,10 **193**

SAKU

Designation	IC	D1	L	BS	S	AN
	mm	mm	mm	mm	mm	°
SAKU 1706..	17	5,8	11,85	3,7	6,35	3



SAKU

SAKU

		-F50 CTCP220	-M50 CTCP220	-F50 CTPP225	-M50 CTPP225
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		SAKU	SAKU	SAKU	SAKU
		51 004 ...	51 005 ...	51 004 ...	51 005 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
1706ABSR	0,8	38,28 270	38,28 270	38,28 070	38,28 070
P		●	●	●	●
M					
K					
N					
S					
H					
O					

SAKU

		-F50 CTCP230	-M50 CTCP230	-F50 CTPP235	-M50 CTPP235
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		SAKU	SAKU	SAKU	SAKU
		51 004 ...	51 005 ...	51 004 ...	51 005 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
1706ABSR	0,8	38,28 020	38,28 020	38,28 120	38,28 120
P		●	●	●	●
M				○	○
K		○	○	○	○
N					
S					
H					
O					

SAKU

		-F50 CTPM225	-M50 CTPM225	-F50 CTCM235	-M50 CTCM235	-F50 CTPM240	-M50 CTPM240	-F50 CTPM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		SAKU	SAKU	SAKU	SAKU	SAKU	SAKU	SAKU
		51 004 ...	51 005 ...	51 004 ...	51 005 ...	51 004 ...	51 005 ...	51 004 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17
1706ABSR	0,8	38,28 220	38,28 220	38,28 320	38,28 320	38,28 420	38,28 420	47,10 470
P		●	●	●	●	○	○	●
M		●	●	●	●	●	●	●
K								
N								
S								
H								
O								

SAKU

		-F50 CTCM245	-M50 CTCK215	-R50 CTCK215	-M50 CTPK220	-R50 CTPK220	-F50 CTC5240	-F50 CTCS245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		SAKU	SAKU	SAKU	SAKU	SAKU	SAKU	SAKU
		51 004 ...	51 005 ...	51 058 ...	51 005 ...	51 058 ...	50 306 ...	51 004 ...
ISO	RE mm	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
1706ABSR	0,8	47,10 92001	38,28 520	38,28 520	38,28 620	38,28 620	47,10 520	47,10 570
P		●						
M		●						
K			●	●	●	●		
N								
S		○					●	●
H								
O								

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 153
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – 273-06 Shell mill

▲ 16 cutting edges per insert







Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS mm	DHUB mm	torque moment Nm	Insert	50 741 ... EUR 2B/40		50 741 ... EUR 2B/40	
A273.40.R.03-06	40	50,2	3	3,5	40	16	38	5	OAKU / XAHT 0605	482,30	**040**		
A273.40.R.04-06	40	50,2	4	3,5	40	16	38	5	OAKU / XAHT 0605	505,90	**140** 5)		
A273.50.R.05-06	50	60,2	5	3,5	40	22	43	5	OAKU / XAHT 0605	567,30	**050**		
A273.63.R.07-06	63	73,2	7	3,5	40	22	48	5	OAKU / XAHT 0605	681,00	**063**		
A273.80.R.08-06	80	90,2	8	3,5	50	27	58	5	OAKU / XAHT 0605	794,30	**080**		
A273.80.R.10-06	80	90,2	10	3,5	50	27	58	4	OAKU / XAHT 0605			1.210,00	**180** 1)
A273.100.R.10-06	100	110,2	10	3,5	50	32	78	5	OAKU / XAHT 0605	936,30	**100**		
A273.100.R.14-06	100	110,2	14	3,5	50	32	78	4	OAKU / XAHT 0605			1.547,00	**200** 1)
A273.125.R.12-06	125	135,2	12	3,5	63	40	88	5	OAKU / XAHT 0605	1.050,00	**125**		
A273.125.R.17-06	125	135,2	17	3,5	63	40	88	4	OAKU / XAHT 0605			1.795,00	**225** 1)
A273.160.R.14-06	160	170,2	14	3,5	63	40	104	5	OAKU / XAHT 0605	1.244,00	**160** 4)		
A273.160.R.20-06	160	170,2	20	3,5	63	40	104	4	OAKU / XAHT 0605			2.123,00	**260** 2)
A273.200.R.25-06	200	210,2	25	3,5	63	60	153	4	OAKU / XAHT 0605			2.655,00	**300** 3)
A273.250.R.31-06	250	260,2	31	3,5	63	60	153	4	OAKU / XAHT 0605			3.247,00	**25031** 3)

1) Version with Wedge, without internal coolant supply
2) Version with Wedge, without internal coolant supply / With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm
3) Version with Wedge, without internal coolant supply / With threaded holes M16 on the front face, pitch circle diameter = 101.6 mm
4) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant
5) Without Through Coolant

	TORX® blade		Clamping key – T		Clamping wedge screw		Clamping wedge Face mill		Key D		Power Screw		Clamping screw		Torque screwdriver	
	80 950 ...		80 397 ...		70 950 ...		70 950 ...		80 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts DC	EUR Y7		EUR Y7		EUR 2A/28		EUR 2A/28		EUR Y7		EUR 2A/28		EUR 2A/28		EUR Y7	
40	6,13	**037**	5,04	**040**					12,83	**114**	16,08	**151**	5,27	**302**	170,10	**193**
50	6,13	**037**	5,46	**050**					12,83	**114**	22,09	**154**	5,27	**302**	170,10	**193**
63 - 80	6,13	**037**							12,83	**114**			5,27	**302**	170,10	**193**
80 - 100	6,13	**036**			7,61	**844**	30,36	**845**	11,96	**113**					170,10	**193**
100 - 125	6,13	**037**							12,83	**114**			5,27	**302**	170,10	**193**
125	6,13	**036**			7,61	**844**	30,36	**845**	11,96	**113**					170,10	**193**
160	6,13	**037**							12,83	**114**			5,27	**302**	170,10	**193**
160 - 250	6,13	**036**			7,61	**844**	30,36	**845**	11,96	**113**					170,10	**193**

MaxiMill – 273-06 Shell mill

▲ 16 cutting edges per indexable insert
▲ Axially adjustable





Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS $_{H6}$ mm	DHUB mm	torque moment Nm	Insert	50 777 ... EUR 2B/40	
A273.80.R.10A10-06	80	90,2	10	3,5	50	27	58	4	OAKU / XAHT 0605	1.591,00	**08010**[1)]
A273.100.R.14A14-06	100	110,2	14	3,5	50	32	78	4	OAKU / XAHT 0605	2.166,00	**10014**[1)]
A273.125.R.17A17-06	125	135,2	17	3,5	63	40	88	4	OAKU / XAHT 0605	2.547,00	**12517**[1)]
A273.160.R.20A20-06	160	170,2	20	3,5	63	40	104	4	OAKU / XAHT 0605	3.007,00	**16020**[2)]
A273.200.R.25A25-06	200	210,2	25	3,5	63	60	153	4	OAKU / XAHT 0605	3.761,00	**20025**[3)]
A273.250.R.31A31-06	250	260,2	31	3,5	63	60	153	4	OAKU / XAHT 0605	4.619,00	**25031**[3)]

1) Version with Wedge
2) Version with Wedge / With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm
3) Version with Wedge / With threaded holes M16 on the front face, pitch circle diameter = 101.6 mm

	TORX® blade	Clamping wedge screw	Clamping wedge Face mill	Key D	Molykote	Wedge	Torque screwdriver
	80 950 ...	**70 950 ...**	**70 950 ...**	**80 950 ...**	**70 950 ...**	**70 950 ...**	**80 950 ...**
Spare parts	EUR	EUR	EUR	EUR	EUR	EUR	EUR
DC	Y7	2A/28	2A/28	Y7	2A/28	2A/28	Y7
80 - 250	6,13 **036**	7,61 **844**	30,36 **845**	11,96 **113**	5,64 **303**	47,44 **199**	170,10 **193**

OAKU / XAHT

Designation	IC	D1	L	BS	S	AN
	mm	mm	mm	mm	mm	°
XAHT 0605..	17,08	6,0	-	11,95	5,56	3
OAKU 0605..	17,10	5,8	6	2,00	5,66	3



OAKU



XAHT

OAKU

		-F50 CTCP220	-M50 CTCP220	-F50 CTPP225	-M50 CTPP225
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		OAKU	OAKU	OAKU	OAKU
		51 000 ...	51 001 ...	51 000 ...	51 001 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
060508SR	0,8	32,28 258	32,28 258	32,28 058	32,28 058
P		●	●	●	●
M					
K					
N					
S					
H					
O					

OAKU

		-F50 CTCP230	-M50 CTCP230	-F50 CTPP235	-M50 CTPP235
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		OAKU	OAKU	OAKU	OAKU
		51 000 ...	51 001 ...	51 000 ...	51 001 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
060508SR	0,8	32,28 008	32,28 008	32,28 108	32,28 108
P		●	●	●	●
M				○	○
K		○	○	○	○
N					
S					
H					
O					

OAKU

		-F50 CTPM225	-M50 CTPM225	-F50 CTCM235	-M50 CTCM235	-F50 CTPM240	-M50 CTPM240	-F40 CTPM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		OAKU	OAKU	OAKU	OAKU	OAKU	OAKU	OAKU
		51 000 ...	51 001 ...	51 000 ...	51 001 ...	51 000 ...	51 001 ...	51 104 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17
060508ER	0,8							40,37 458
060508SR	0,8	32,28 208	32,28 208	32,28 308	32,28 308	32,28 408	32,28 408	
P		●	●	●	●	○	○	●
M		●	●	●	●	●	●	●
K								
N								
S								
H								
O								

OAKU

		-F40 CTCM245	-M50 CTCK215	-R50 CTCK215	-M50 CTPK220	-R50 CTPK220	-F40 CTC5240	-F40 CTCS245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		OAKU	OAKU	OAKU	OAKU	OAKU	OAKU	OAKU
		51 104 ...	51 001 ...	51 027 ...	51 001 ...	51 027 ...	50 446 ...	51 104 ...
ISO	RE mm	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
060508ER	0,8	40,37 90801					40,37 550	40,37 50801
060508SR	0,8		32,28 508	32,28 508	32,28 608	32,28 608		
P		●						
M		●						
K			●	●	●	●		
N								
S		○					●	●
H								
O								

15

XAHT

▲ Masterfinish indexable insert (sweeper insert)

		-M50 CTCP220	-M50 CTPP225	-M50 CTCP230	-M50 CTPP235
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		XAHT	XAHT	XAHT	XAHT
		51 014 ...	51 014 ...	51 014 ...	51 014 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
060525SR	2,5	39,97 275	39,97 075	39,97 025	39,97 125
P		●	●	●	●
M					○
K				○	○
N					
S					
H					
O					

XAHT

▲ Masterfinish indexable insert (sweeper insert)

		-M50 CTPM225	-M50 CTCM235	-M50 CTPM240	-M50 CTCK215	-M50 CTPK220
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
		XAHT	XAHT	XAHT	XAHT	XAHT
		51 014 ...	51 014 ...	51 014 ...	51 014 ...	51 014 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
060525SR	2,5	39,97 225	39,97 325	39,97 425	39,97 525	39,97 625
P		●	●	○		
M		●	●	●		
K					●	●
N						
S						
H						
O						

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 154
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

MaxiMill – 273-08 Shell mill

▲ 16 cutting edges per insert





NEW NEW

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS H6 mm	DHUB mm	torque moment Nm	Insert	50 779 ... EUR 2B/40		50 779 ... EUR 2B/40	
A273.63.R.05-08	63	76,7	5	5	50	22	48	5	ONKU 0806	588,10	**06300**		
A273.63.R.06-08	63	76,7	6	5	50	22	48	5	ONKU 0806			859,00	**16300**[1]
A273.80.R.06-08	80	93,7	6	5	50	27	58	5	ONKU 0806	714,80	**08000**		
A273.80.R.08-08	80	93,7	8	5	50	27	58	4	ONKU 0806			1.086,00	**18000**[1]
A273.100.R.07-08	100	113,7	7	5	63	32	78	5	ONKU 0806	743,70	**10000**		
A273.100.R.09-08	100	113,7	9	5	63	32	78	4	ONKU 0806			1.131,00	**20000**[1]
A273.125.R.08-08	125	138,7	8	5	63	40	88	5	ONKU 0806	865,20	**12500**		
A273.125.R.11-08	125	138,7	11	5	63	40	88	4	ONKU 0806			1.406,00	**22500**[1]
A273.160.R.10-08	160	173,7	10	5	63	40	98	5	ONKU 0806	1.339,00	**16000**[3]		
A273.160.R.14-08	160	173,7	14	5	63	40	98	4	ONKU 0806			1.710,00	**26000**[2]

1) Version with Wedge
2) Version with Wedge, without internal coolant supply / With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm
3) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

Spare parts for Article no.	TORX® blade 80 950 ... EUR Y7		Clamping wedge screw 70 950 ... EUR 2A/28		Clamping wedge Face mill 70 950 ... EUR 2A/28		Key D 80 950 ... EUR Y7		Molykote 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7	
50 779 06300	6,78	**055**					16,17	**129**	5,64	**303**	5,46	**821**	170,10	**193**
50 779 16300	6,13	**036**	7,61	**844**	30,36	**845**	11,96	**113**	5,64	**303**			170,10	**193**
50 779 08000	6,78	**055**					16,17	**129**	5,64	**303**	5,46	**821**	170,10	**193**
50 779 18000	6,13	**036**	7,61	**844**	30,36	**845**	11,96	**113**	5,64	**303**			170,10	**193**
50 779 10000	6,78	**055**					16,17	**129**	5,64	**303**	5,46	**821**	170,10	**193**
50 779 20000	6,13	**036**	7,61	**844**	30,36	**845**	11,96	**113**	5,64	**303**			170,10	**193**
50 779 12500	6,78	**055**					16,17	**129**	5,64	**303**	5,46	**821**	170,10	**193**
50 779 22500	6,13	**036**	7,61	**844**	30,36	**845**	11,96	**113**	5,64	**303**			170,10	**193**
50 779 16000	6,78	**055**					16,17	**129**	5,64	**303**	5,46	**821**	170,10	**193**
50 779 26000	6,13	**036**	7,61	**844**	30,36	**845**	11,96	**113**	5,64	**303**			170,10	**193**

ONKU

Designation	IC mm	D1 mm	L mm	S mm
ONKU 0806..	22	5,8	8,45	6,45



ONKU

		NEW	NEW	NEW	NEW	NEW
		-M50 CTCP230	-M50 CTPP235	-M50 CTPM240	-M50 CTCK215	-M50 CTPK220
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
		ONKU	ONKU	ONKU	ONKU	ONKU
		51 163 ...	51 163 ...	51 163 ...	51 163 ...	51 163 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
080608SN	0,8	32,97 00800	32,97 10800	32,97 20800	32,97 50800	32,97 60800
P		●	●	○		
M			○	●		
K		○	○		●	●
N						
S						
H						
O						

ONKU

		NEW	NEW	NEW	NEW
		-R50 CTCP230	-R50 CTPP235	-R50 CTCK215	-R50 CTPK220
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		ONKU	ONKU	ONKU	ONKU
		51 164 ...	51 164 ...	51 164 ...	51 164 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
080608SN	0,8	32,97 00800	32,97 10800	32,97 50800	32,97 60800
P		●	●		
M			○		
K		○	○	●	●
N					
S					
H					
O					

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 155
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

MaxiMill – 270-09 End milling cutter



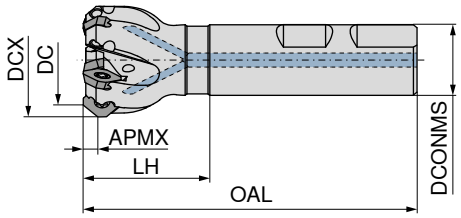

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS mm	torque moment Nm	Insert	50 666 ... EUR 2B/40	
C270.06.R.01-09	6	14,4	1	4	80	32	16	1,2	SD.. 0903..	171,80	006
C270.12.R.01-09	12	20,4	1	4	80	32	16	1,2	SD.. 0903..	189,70	012
C270.16.R.02-09	16	24,4	2	4	90	40	20	1,8	SD.. 0903..	216,00	016
C270.20.R.03-09	20	28,4	3	4	90	40	20	1,8	SD.. 0903..	274,80	020
C270.25.R.04-09	25	33,4	4	4	100	44	25	1,8	SD.. 0903..	389,40	025
C270.32.R.05-09	32	40,4	5	4	95	36	25	1,8	SD.. 0903..	458,10	032

MaxiMill – 270-09 Shell mill





Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	torque moment Nm	Insert	50 705 ... EUR 2B/40		50 706 ... EUR 2B/40	
A270.32.R.05-09	32	40,4	5	4	40	34	16	1,8	SD../XD.. 0903..			438,40	532
A270.40.R.04-09	40	48,4	4	4	40	38	16	1,8	SD../XD.. 0903..	449,90	540		
A270.40.R.06-09	40	48,4	6	4	40	38	16	1,8	SD../XD.. 0903..			507,20	540
A270.50.R.06-09	50	58,4	6	4	40	43	22	1,8	SD../XD.. 0903..	522,00	550		
A270.50.R.08-09	50	58,4	8	4	40	43	22	1,8	SD../XD.. 0903..			625,00	550
A270.63.R.08-09	63	71,4	8	4	40	48	22	1,8	SD../XD.. 0903..	633,10	563		
A270.63.R.10-09	63	71,4	10	4	40	48	22	1,8	SD../XD.. 0903..			788,60	563
A270.80.R.10-09	80	88,4	10	4	50	58	27	1,8	SD../XD.. 0903..	800,00	580		
A270.80.R.12-09	80	88,4	12	4	50	58	27	1,8	SD../XD.. 0903..			948,70	580
A270.100.R.12-09	100	108,4	12	4	50	78	32	1,8	SD../XD.. 0903..	965,20	600		
A270.100.R.14-09	100	108,4	14	4	50	78	32	1,8	SD../XD.. 0903..			1.121,00	600
A270.125.R.12-09	125	133,4	12	4	63	88	40	1,8	SD../XD.. 0903..	1.129,00	625		

▲ 50 705 ... Normal pitch for a broad spectrum of use on aluminum alloys, non-ferrous metals, and soft steel materials
▲ 50 706 ... Fine pitch for highest feed rates, predominantly used on steel and cast materials

MaxiMill – 272-09 Chamfer milling cutter

▲ Usable on front and rear cutting edges



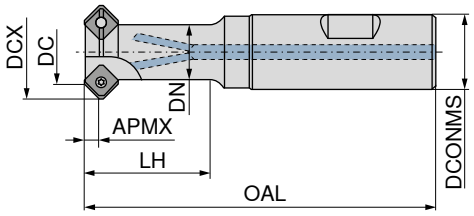

Designation	DC	DCX	ZNF	APMX	DN	OAL	LH	DCONMS	torque moment	Insert	50 669 ... EUR 2B/40	
	mm	mm		mm	mm	mm	mm	mm	Nm			
C272.06.R.01-09	6	14,4	1	4	10	91	24,0	16	1,2	SD.. 0903..	204,30	**10600**
C272.08.R.01-09	8	16,4	1	4	10	91	25,5	16	1,2	SD.. 0903..	227,70	**008**
C272.12.R.01-09	12	20,4	1	4	12	91	26,0	16	1,2	SD.. 0903..	234,00	**012**
C272.16.R.02-09	16	24,4	2	4	15	97	30,0	20	1,8	SD.. 0903..	287,90	**016**
C272.18.R.02-09	18	26,4	2	4	16	97	30,0	20	1,8	SD.. 0903..	287,90	**018**
C272.25.R.03-09	25	33,4	3	4	21	109	35,0	25	1,8	SD.. 0903..	336,90	**025**

TORX® blade

Key D

Molykote

Clamping screw

Torque screwdriver

Spare parts	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7	
DC										
6 - 12	6,13	**033**	10,05	**110**	5,64	**303**	4,06	**365**	153,30	**191**
16 - 25	6,13	**033**	10,05	**110**	5,64	**303**	3,32	**115**	153,30	**191**

SDHW / SDNT / SDHT / XDHW

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDHW 0903..	9,52	3,4	5,50	1,68	3,18
SD.. 0903..	9,52	3,4	9,52	1,68	3,18



SD..



XDHW

SDHW / SDNT / SDHT

	TCM10	-29 CTCP230	-29 CTPP235	-33 CTPM240	-33P CTPM240	-F50 CTPM245	-F50 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
	CERMET						
	SDHW	SDNT	SDNT	SDHT	SDHT	SDHT	SDHT
	50 428 ...	51 011 ...	51 011 ...	51 028 ...	51 086 ...	51 109 ...	51 109 ...
ISO / RE mm	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
0903AESN 1	20,99 898	18,12 020	18,12 120	20,72 420	21,80 420	25,76 470	25,76 92001
P	●	●	●	○	○	●	●
M			○	●	●	●	●
K	○	○	○				
N							
S							○
H							
O							

SDNT / SDHT

			NEW			
	-31 CTCK215	-F10 CTPX715	-27P H216T	-M31 CTC5240	-F50 CTCS245
	DRAGONSKIN	DRAGONSKIN		DRAGONSKIN	DRAGONSKIN
					
	SDNT	SDHT	SDHT	SDHT	SDHT
	51 029 ...	51 160 ...	50 426 ...	50 421 ...	51 109 ...
ISO / RE mm	EUR 1B/61	EUR 1A/90	EUR 1A/90	EUR 1H/17	EUR 1H/17
0903AEFN 1		24,84 02002	20,72 548		
0903AESN 1	17,35 520			25,76 509	25,76 57100
P		○			
M		○			
K	●	●	○		
N		●	●		
S		○		●	●
H					
O		○	○		

XDHW

▲ Masterfinish indexable insert (sweeper insert)

		TCM10	CTCP230 DRAGONSKIN	CTPP235 DRAGONSKIN	CTCK215 DRAGONSKIN	H216T
						
		CERMET XDHW	XDHW	XDHW	XDHW	XDHW
		50 449 ...	51 015 ...	51 015 ...	51 015 ...	50 449 ...
ISO	RE mm	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/18	EUR 1B/61
0903AEEN	1				24,65 **520**	
0903AEFN	1					21,80 **548**
0903AESN	1	22,75 **898**	25,48 **020**	25,48 **120**		
P		●	●	●		
M				○		
K		○	○	○	●	○
N						●
S						
H						
O						○

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 156
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

MaxiMill – 270-12 Shell mill

▲ 50 705 ... Normal pitch for a broad spectrum of use on aluminum alloys, non-ferrous metals, up to soft steel materials
▲ 50 706 ... Predominantly fine pitch for highest feed rates, use on steel and cast materials





										50 705 ...		50 706 ...	
Designation	DC mm	DCX mm	ZNF	APMX mm	DCONMS H6 mm	OAL mm	DHUB mm	torque moment Nm	Insert	EUR 2B/40		EUR 2B/40	
A270.40.R.03-12	40	54	3	6	16	40	38	5	SD../XD.. 1204..	513,70	**040**		
A270.40.R.04-12	40	54	4	6	16	40	38	5	SD../XD.. 1204..			513,70	**040**
A270.50.R.04-12	50	64	4	6	22	40	43	5	SD../XD.. 1204..	580,80	**050**		
A270.50.R.05-12	50	64	5	6	22	40	43	5	SD../XD.. 1204..			580,80	**050**
A270.63.R.04-12	63	77	4	6	22	40	48	5	SD../XD.. 1204..	664,30	**063**		
A270.63.R.06-12	63	77	6	6	22	40	48	5	SD../XD.. 1204..			760,80	**063**
A270.80.R.05-12	80	94	5	6	27	50	58	5	SD../XD.. 1204..	770,60	**080**		
A270.80.R.08-12	80	94	8	6	27	50	58	5	SD../XD.. 1204..			948,70	**080**
A270.100.R.06-12	100	114	6	6	32	50	78	5	SD../XD.. 1204..	907,80	**100**		
A270.100.R.10-12	100	114	10	6	32	50	78	5	SD../XD.. 1204..			1.111,00	**100**
A270.125.R.07-12	125	139	7	6	40	63	88	5	SD../XD.. 1204..	1.109,00	**125**		
A270.125.R.12-12	125	139	12	6	40	63	88	5	SD../XD.. 1204..			1.500,00	**125**
A270.160.R.08-12	160	174	8	6	40	63	94	5	SD../XD.. 1204..	1.417,00	**160** [1]		

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		**80 397 ...**		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7	
40	6,13	**037**	5,04	**040**	12,83	**114**	16,08	**151**	5,64	**303**	3,19	**01200**	170,10	**193**
50 - 160	6,13	**037**			12,83	**114**			5,64	**303**	3,19	**01200**	170,10	**193**

15

SDHT / SDHW / SDMT / XDHW

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDHW 1204..	12,7	5,5	7,5	1,74	4,76
SD.. 1204..	12,7	5,5	12,7	1,74	4,76



SD..



XDHW

SDHT / SDHW / SDMT

		TCM10	-R TCM10	-29R CTCP230	-R CTCP230	CTCP230
				DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		CERMET	CERMET			
		SDHT	SDHW	SDMT	SDHT	SDHW
		50 426 ...	50 428 ...	51 010 ...	51 006 ...	51 008 ...
ISO	RE mm	EUR 1B/79	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/61
1204AESN	0,2	22,60 900				
1204AESN	1,0		23,54 899	19,26 020	21,97 020	22,60 020
P		●	●	●	●	●
M						
K		○	○	○	○	○
N						
S						
H						
O						

SDMT / SDHT / SDHW

		-29R CTPP235	-R CTPP235	-R CTPP235	-33 CTPM240	-F50 CTPM245	-F50 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		SDMT	SDHT	SDHW	SDHT	SDHT	SDHT
		51 010 ...	51 006 ...	51 008 ...	51 028 ...	51 109 ...	51 109 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
1204AESN	1	19,26 120	21,97 120	22,60 120	22,60 425	29,66 475	29,66 92501
P		●	●	●	○	●	●
M		○	○	○	●	●	●
K		○	○	○			
N							
S							○
H							
O							

SDMT / SDHW / SDHT

		-31 CTCK215	-R CTCK215	-27 H216T	NEW -F10 CTPX715	-27P H216T	H216T
		DRAGONSKIN	DRAGONSKIN		DRAGONSKIN		
							
		SDMT	SDHW	SDHT	SDHT	SDHT	SDHW
		51 059 ...	51 008 ...	50 426 ...	51 160 ...	50 426 ...	50 428 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1A/90	EUR 1A/90	EUR 1A/90	EUR 1B/61
1204AEEN	1,0	18,75 **520**	22,60 **520**				
1204AEFN	0,2			22,60 **504**	27,13 **02502**		
1204AEFN	1,0					22,60 **554**	
1204AESN	0,2						18,75 **600**
P					○		
M					○		
K		●	●	○	●	○	○
N				●	●	●	●
S					○		
H							
O				○	○	○	○

SDHT

		-M31 CTC5240	-F50 CTCS245
		DRAGONSKIN	DRAGONSKIN
		SDHT	SDHT
		50 421 ...	51 109 ...
ISO	RE mm	EUR 1H/17	EUR 1H/17
1204AESN	1	29,66 **512**	29,66 **57600**
P			
M			
K			
N			
S		●	●
H			
O			

15

XDHW

▲ Masterfinish indexable insert (sweeper insert)

		TCM10	CTCP230 DRAGONSKIN	CTPP235 DRAGONSKIN	CTCK215 DRAGONSKIN	H216T
						
		CERMET XDHW	XDHW	XDHW	XDHW	XDHW
		50 449 ...	**51 015 ...**	**51 015 ...**	**51 015 ...**	**50 449 ...**
ISO	RE mm	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
1204AEEN	1				29,76 **525**	
1204AEFN	1					28,15 **600**
1204AESN	1	29,76 **900**	31,20 **025**	31,20 **125**		
P		●	●	●		
M				○		
K		○	○	○	●	○
N						●
S						
H						
O						○

SDHW

Designation	IC	D1	L	S
	mm	mm	mm	mm
SDHW 1204..	12,7	5,5	12,7	4,76



SDHW

SDHW

ISO		CTDPS30		CTBS10U	
					
		DIAMOND SDHW		CBN SDHW	
		51 900 ...		51 900 ...	
		EUR V9		EUR V9	
1204AEFN-2		75,65	100 [1]		
1204AEFN-3		75,65	102 [2]		
1204AETN-2				69,39	300 [1]
P					
M					
K					●
N			●		
S					
H					○
O					

1) $a_{p\,max.}$ = 2.0 mm
2) $a_{p\,max.}$ = 3,5 mm

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 156
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – 270-19 Shell mill





										Left-hand		Right-hand	
										50 698 ...		**50 698 ...**	
Designation	DC mm	DCX mm	ZNF	APMX mm	DCONMS $_{H6}$ mm	OAL mm	DHUB mm	torque moment Nm	Insert	**EUR** 2B/40		**EUR** 2B/40	
A270.125.R.07-19	125	146,4	7	10	40	63	88	5	SD.. 1907..			994,70	**12507**
A270.160.R.09-19	160	181,4	9	10	40	63	104	5	SD.. 1907..			1.260,00	**16009**[1)]
A270.200.R.11-19	200	221,1	11	10	60	63	134	5	SD.. 1907..			1.525,00	**20011**[2)]
A270.250.L.14-19	250	271,4	14	10	60	63	134	5	SD.. 1907..	2.851,00	**75014**[2)]		
A270.250.R.14-19	250	271,4	14	10	60	63	134	5	SD.. 1907..			2.851,00	**25014**[2)]
A270.315.L.17-19	315	336,4	17	10	60	63	226	5	SD.. 1907..	3.377,00	**81517**[4)]		
A270.315.R.17-19	315	336,4	17	10	60	63	226	5	SD.. 1907..			3.377,00	**31517**[3)]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant
2) With threaded holes M16 on the front face, pitch circle diameter = 101.6 mm / Without Through Coolant
3) With 4 threaded holes M16 on the front face, pitch circle diameter = 101.6 mm and with 4 threaded holes M20 on the front face, pitch circle diameter = 177.8 mm / Without Through Coolant
4) With 4 threaded holes M16 on the front face, pitch circle diameter = 101.6 mm and with 4 threaded holes M20 on the front face, pitch circle diameter = 177.8 mm

	TORX® blade		Key D		Molykote		Clamping screw		Solid Carbide support S		Threaded sleeve		Torque screwdriver	
	80 950 ...		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts	**EUR**		**EUR**		**EUR**		**EUR**		**EUR**		**EUR**		**EUR**	
DC	Y7		Y7		2A/28		2A/28		2A/28		2A/28		Y7	
125 - 315	6,13	**037**	12,83	**114**	5,64	**303**	5,27	**302**	16,49	**01500**	19,02	**01400**	170,10	**193**

SDKT

Designation	IC	D1	L	BS	S	AN
	mm	mm	mm	mm	mm	°
SDKT 1907..	19,15	6	19,15	1,5	7,15	15



SD..

SDKT

		-M50 CTCP220	-R50 CTPP225	-R50 CTCP230	-M50 CTPP235	-R50 CTPP235	-R50 CTPM225	-R50 CTCK215
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		SDKT	SDKT	SDKT	SDKT	SDKT	SDKT	SDKT
		51 131 ...	51 132 ...	51 132 ...	51 131 ...	51 132 ...	51 132 ...	51 132 ...
ISO	RE	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
	mm							
1907AESN	1,6	40,78 **22001**	40,78 **07000**	40,78 **02100**	40,78 **12000**	40,78 **12300**	40,78 **22200**	40,78 **52000**
P		●	●	●	●	●	●	
M					○	○	●	
K				○	○	○		●
N								
S								
H								
O								

Milling guide

Cutting data standard values	→ 145–148	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

15

MaxiMill – HEC 11 Shell mill

▲ not adjustable





50 725 ...

Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
AHEC.50.R.06-11	50	6	6	40	48	22	12700	3,2	LNHX 1106	686,50	**050**
AHEC.63.R.08-11	63	8	6	40	48	22	10100	3,2	LNHX 1106	824,20	**063**
AHEC.80.R.10-11	80	10	6	50	58	27	8000	3,2	LNHX 1106	1.007,00	**080**
AHEC.100.R.12-11	100	12	6	50	78	32	6400	3,2	LNHX 1106	1.176,00	**100**
AHEC.125.R.12-11	125	12	6	63	88	40	5100	3,2	LNHX 1106	1.343,00	**125**
AHEC.125.R.16-11	125	16	6	63	88	40	5100	3,2	LNHX 1106	1.353,00	**12516**
AHEC.160.R.20-11	160	20	6	63	100	40	4000	3,2	LNHX 1106	1.972,00	**160** [1)]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

MaxiMill – HEC 11 Shell mill

▲ Axially adjustable with same tooth pitch







50 733 ...

Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
AHEC.50.R.06A03-11	50	6	6	40	48	22	12700	3,2	LNHX 1106	1.040,00	**050**
AHEC.63.R.08A04-11	63	8	6	40	48	22	10100	3,2	LNHX 1106	1.295,00	**063**
AHEC.80.R.10A05-11	80	10	6	50	58	27	8000	3,2	LNHX 1106	1.597,00	**080**
AHEC.100.R.12A06-11	100	12	6	50	78	32	6400	3,2	LNHX 1106	1.885,00	**100**
AHEC.125.R.16A08-11	125	16	6	63	88	40	5100	3,2	LNHX 1106	2.549,00	**125**
AHEC.160.R.20A10-11	160	20	6	63	100	40	4000	3,2	LNHX 1106	3.151,00	**160** [1)]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

MaxiMill – HEC 11 Shell mill

▲ with irregular pitch, non adjustable







Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	50 733 ... EUR 2B/40	
AHEC.50.R.04B-11	50	4	6	40	48	22	12700	3,2	LNHX 1106	535,50	**550**
AHEC.63.R.06B-11	63	6	6	40	48	22	10100	3,2	LNHX 1106	665,50	**563**
AHEC.80.R.08B-11	80	8	6	50	58	27	8000	3,2	LNHX 1106	852,90	**580**
AHEC.100.R.10B-11	100	10	6	50	78	32	6400	3,2	LNHX 1106	1.096,00	**600**
AHEC.125.R.12B-11	125	12	6	63	88	40	5100	3,2	LNHX 1106	1.341,00	**625**
AHEC.160.R.14B-11	160	14	6	63	100	40	4000	3,2	LNHX 1106	1.664,00	**660** [1)]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

	TORX® blade		Molykote		Coolant Disc		Clamping screw		Wedge		Torque screwdriver	
	80 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts **DC**	EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR Y7	
50 - 63	6,13	**036**	5,64	**303**	31,86	**852**	4,14	**113**			170,10	**193**
80	6,13	**036**	5,64	**303**	32,54	**853**	4,14	**113**	47,44	**199**	170,10	**193**
100	6,13	**036**	5,64	**303**	36,51	**854**	4,14	**113**			170,10	**193**
125	6,13	**036**	5,64	**303**	48,13	**855**	4,14	**113**			170,10	**193**
160	6,13	**036**	5,64	**303**			4,14	**113**			170,10	**193**

LNHX

Designation	IC	D1	L	S
	mm	mm	mm	mm
LNHX 1106..	10	4,27	11	6,35



LNHX

LNHX

		CTEP210	CTCK215	-R50 CTCK215	-Q CTCK215
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		CERMET			
		LNHX	LNHX	LNHX	LNHX
		51 046 ...	51 046 ...	51 024 ...	51 045 ...
ISO	RE mm	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/61
1106PNER	0,5		34,05 520	34,05 520	
1106ZZER	0,5				34,05 520 [1]
1106PNER	0,8	39,48 820			
110616EN	1,6		34,05 51600		
P		●			
M					
K		●	●	●	●
N					
S					
H					
O					

1) -Q = trailing edge insert

LNHX

		CTPK220	-R50 CTPK220	CTN3105	CTL3215	-Q CTL3215
		DRAGONSKIN	DRAGONSKIN			
						
				CERAMIC	CBN	CBN
		LNHX	LNHX	LNHX	LNHX	LNHX
		51 046 ...	51 024 ...	50 500 ...	51 046 ...	51 045 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1G/55	EUR 1G/21	EUR 1G/21
110608EN	0,8		34,05 608			
1106PNER	0,5	34,05 620	34,05 620			
1106PNSR	0,5			32,10 904		
1106PNSR					178,60 87200	
1106ZZER						178,60 87000 [1]
P						
M						
K		●	●	●	●	●
N						
S						
H					○	○
O						

1) -Q = trailing edge insert

Milling guide

Cutting data standard values	→ 145–148	Assembly instructions	→ 157
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

Finishing cutter F 5000 A

▲ With µm-adjustable inserts
▲ Adjust with screw (56 950 017) and set with Torx 20 key (80 950 114)





Designation	DC mm	ZNF	APMX mm	OAL mm	DCONMS mm	DHUB mm	torque moment Nm	Insert	56 511 ... EUR WA	
F5000A.42.2.43.IK	42	2	0,2	43	16	35	3,2	TEHX 16T3..	407,20	**421**
F5000A.52.2.43.IK	52	2	0,2	43	22	48	3,2	TEHX 16T3..	492,10	**521**
F5000A.66.2.53.IK	66	2	0,2	53	27	60	3,2	TEHX 16T3..	574,20	**661**
F5000A.80.2.53.IK	80	2	0,2	53	27	60	3,2	TEHX 16T3..	657,80	**801**
F5000A.100.2.53	100	2	0,2	53	32	70	3,2	TEHX 16T3..	740,00	**910** 1)

1) Without Through Coolant

	TORX® blade	Key-T	Key D	Power Screw	Axial runout adjustment screw	Molykote	Clamping screw	Torque screwdriver
	80 950 ...	80 950 ...	80 950 ...	56 950 ...	56 950 ...	70 950 ...	56 950 ...	80 950 ...
Spare parts	EUR	EUR	EUR	EUR	EUR	EUR	EUR	EUR
DC	Y7	Y7	Y7	WA	WA	2A/28	WA	Y7
42	6,13 **036**	5,74 **088**	12,83 **114**	30,50 **121**	4,86 **017**	5,64 **303**	4,49 **028**	170,10 **193**
52	6,13 **036**	5,74 **088**	11,96 **113**		4,86 **017**	5,64 **303**	4,49 **028**	170,10 **193**
66	6,13 **036**	5,74 **088**	11,96 **113**		4,86 **017**	5,64 **303**	4,49 **028**	170,10 **193**
80	6,13 **036**	5,74 **088**	11,96 **113**		4,86 **017**	5,64 **303**	4,49 **028**	170,10 **193**
100	6,13 **036**	5,74 **088**	11,96 **113**	30,50 **121**	4,86 **017**	5,64 **303**	4,49 **028**	170,10 **193**

Description of article

▲ Tightening torque of the indexable insert clamping screw 56 950 028 is 3.2 Nm.
▲ This tool produces surfaces with excellent surface quality Rz ≤ 2.5 µm with high axial run-out precision.
▲ The two precision adjustment screws make adjustment to µm accuracy possible.
▲ Additional grinding is therefore avoided, so machining time and costs are reduced.
▲ The tool is also well-suited for unstable workpieces and low power machines.

The screws for the adjustment of the axial run-out are mounted on every milling cutter and have to be tightened to a preset value. Otherwise there is the danger that the screws loosen during the machining operation. This can result in damage of the workpiece or tool and also cause danger for the machine operator. Should the screws for fine adjustment not be needed we recommend to remove them from the tool.

Material	v_c m/min	f_z mm	a_p mm
Steel	150–250*)	0,5–2	0,05–0,2
Cast iron	150–250*)	0,5–2	0,05–0,2
Hardened materials ≤ 56 HRC	35–200*)	0,2–1	0,05–0,1

*) Depending on the machining and structural state of the processed workpiece.

TEHX

Designation	L mm	S mm	D1 mm
TEHX 16T3..	14,32	4,00	3,9



TEHX

WTN1205

TEHX

56 327 ...

ISO	RE mm	EUR WB	
16T3ZF	0,2	27,85	**151**

P	●
M	●
K	●
N	
S	
H	●
O	

Milling guide

Cutting data standard values	→ 145–148	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 491-09 Screw in cutter



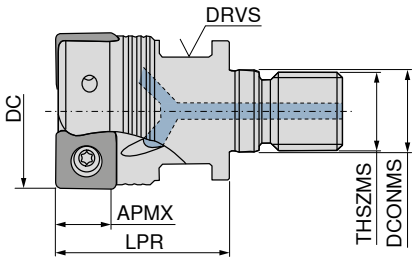

Designation	DC mm	ZNF	APMX mm	LPR mm	THSZMS	DCONMS mm	DRVS mm	torque moment Nm	Insert	50 773 ... EUR 2B/40	
G491.25.R.03-09	25	3	6	35	M12	12,5	17	2	SNHU 09T3	444,30	125
G491.32.R.03-09	32	3	6	35	M16	17,0	24	2	SNHU 09T3	451,00	132
G491.32.R.04-09	32	4	6	35	M16	17,0	24	2	SNHU 09T3	503,90	232

MaxiMill – 491-09 End milling cutter



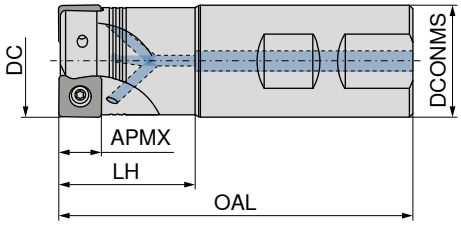

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS h6 mm	RPMX 1/min.	torque moment Nm	Insert	50 774 ... EUR 2B/40		50 774 ... EUR 2B/40	
C491.25.R.03-09-B-32	25	3	6	89	32	25	23500	2	SNHU 09T3			451,00	425
C491.25.R.03-09-A-50-225	25	3	6	225	50	25	23500	2	SNHU 09T3	451,00	325		
C491.32.R.03-09-B-40	32	3	6	101	40	32	19600	2	SNHU 09T3			464,10	632
C491.32.R.04-09-B-40	32	4	6	101	40	32	19600	2	SNHU 09T3			503,90	432
C491.32.R.03-09-A-63-250	32	3	6	250	63	32	19600	2	SNHU 09T3	464,10	532		
C491.32.R.04-09-A-63-250	32	4	6	250	63	32	19600	2	SNHU 09T3	503,90	332		

Spare parts DC	TORX® blade 80 950 ... EUR Y7		Key D 80 950 ... EUR Y7		Molykote 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7	
25 - 32	6,78	053	11,50	119	5,64	303	3,97	710	170,10	193

15

MaxiMill – 491-09 Shell mill





Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	50 776 ... EUR 2B/40		50 775 ... EUR 2B/40	
A491.40.R.03-09	40	3	6	40	38	16	16800	2	SNHU 09T3			490,50	**240**
A491.40.R.05-09	40	5	6	40	38	16	16800	2	SNHU 09T3	570,20	**240**		
A491.50.R.04-09	50	4	6	40	43	22	14600	2	SNHU 09T3			543,70	**250**
A491.50.R.06-09	50	6	6	40	43	22	14600	2	SNHU 09T3	623,30	**250**		
A491.63.R.05-09	63	5	6	40	48	22	12700	2	SNHU 09T3			649,80	**263**
A491.63.R.08-09	63	8	6	40	48	22	12700	2	SNHU 09T3	769,00	**263**		
A491.80.R.06-09	80	6	6	50	58	27	11100	2	SNHU 09T3			689,70	**280**
A491.80.R.10-09	80	10	6	50	58	27	11100	2	SNHU 09T3	848,70	**280**		
A491.100.R.07-09	100	7	6	50	78	32	9800	2	SNHU 09T3			875,20	**300**
A491.100.R.12-09	100	12	6	50	78	32	9800	2	SNHU 09T3	1.074,00	**300**		
A491.125.R.08-09	125	8	6	63	88	40	8700	2	SNHU 09T3			1.061,00	**325**
A491.125.R.15-09	125	15	6	63	88	40	8700	2	SNHU 09T3	1.300,00	**325**		

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		**80 397 ...**		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7	
40	6,78	**053**	5,04	**040**	11,50	**119**	16,08	**151**	5,64	**303**	3,97	**710**	170,10	**193**
50 - 125	6,78	**053**			11,50	**119**			5,64	**303**	3,97	**710**	170,10	**193**

SNHU

Designation	IC	L	S	D1
	mm	mm	mm	mm
SNHU 09T3..	9,15	9,15	3,70	3,85



SNHU

	-M50 CTCP230	-M50 CTPP235	-F50 CTPM240	-M50 CTPM240	-F40 CTPM245	-F40 CTCM245
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
	SNHU	SNHU	SNHU	SNHU	SNHU	SNHU
	51 120 ...	51 120 ...	51 119 ...	51 120 ...	51 126 ...	51 126 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
09T308ER 0,8					36,09 **45800**	36,09 **90801**
09T308SR 0,8	28,85 **008**	28,85 **108**	28,85 **408**	28,85 **408**		
09T312SR 1,2	28,85 **01200**	28,85 **11200**	28,85 **41200**	28,85 **41200**		
09T316SR 1,6	28,85 **01600**	28,85 **11600**	28,85 **41600**	28,85 **41600**		
P	●	●	○	○	●	●
M		○	●	●	●	●
K	○	○				
N						
S						○
H						
O						

SNHU

NEW

	-R50 CTCK215	-R50 CTPK220	-F10 CTPX715	-F10 CTWN215	-F40 CTC5240	-F40 CTCS245
	DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	DRAGONSKIN
						
	SNHU	SNHU	SNHU	SNHU	SNHU	SNHU
	51 121 ...	51 121 ...	51 118 ...	51 118 ...	51 126 ...	51 126 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
09T308ER 0,8					36,09 **15800**	36,09 **55800**
09T308FR 0,8			34,76 **00802**	28,85 **358**		
09T308SR 0,8	28,85 **508**	28,85 **60800**				
09T312FR 1,2				28,85 **36200**		
09T312SR 1,2	28,85 **51200**					
09T316FR 1,6				28,85 **36600**		
09T316SR 1,6	28,85 **51600**					
P			○			
M			○			
K	●	●	●	○		
N			●	●		
S			○		●	●
H						
O			○	○		

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 159
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – 491-12 Screw in cutter



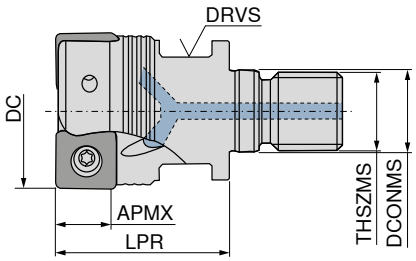

Designation	DC mm	ZNF	APMX mm	LPR mm	THSZMS	DCONMS mm	DRVS mm	torque moment Nm	Insert	50 773 ... EUR 2B/40	
G491.32.R.02-12	32	2	8	35	M16	17	24	3,2	SNHU 1204	424,50	032

MaxiMill – 491-12 End milling cutter



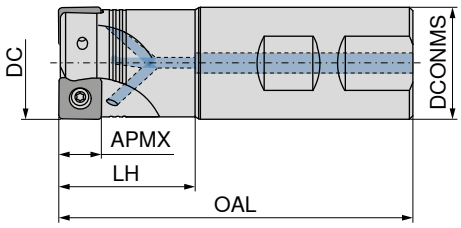

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS $_{h6}$ mm	RPMX 1/min.	torque moment Nm	Insert	50 774 ... EUR 2B/40		50 774 ... EUR 2B/40	
C491.32.R.02-12-B-40	32	2	8	102	40	32	13600	3,2	SNHU 1204			424,50	032
C491.32.R.02-12-A-63-250	32	2	8	250	63	32	10200	3,2	SNHU 1204	424,50	232		

TORX® blade

Key D

Molykote

Clamping screw

Torque screwdriver

Spare parts DC	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7	
32	6,78	054	15,33	128	5,64	303	4,14	859	170,10	193

MaxiMill – 491-12 Shell mill





											50 776 ...		50 775 ...	
Designation	DC	ZNF	APMX	OAL	DHUB	DCONMS $_{H6}$	RPMX	torque moment	Insert		EUR		EUR	
	mm		mm	mm	mm	mm	1/min.	Nm			2B/40		2B/40	
A491.40.R.03-12	40	3	8	40	38	16	11500	3,2	SNHU 1204				490,50	**040**
A491.40.R.04-12	40	4	8	40	38	16	11500	3,2	SNHU 1204		530,40	**040**		
A491.50.R.04-12	50	4	8	40	43	22	9800	3,2	SNHU 1204				543,70	**050**
A491.50.R.05-12	50	5	8	40	43	22	9800	3,2	SNHU 1204		583,50	**050**		
A491.63.R.05-12	63	5	8	40	48	22	8500	3,2	SNHU 1204				649,80	**063**
A491.63.R.06-12	63	6	8	40	48	22	8500	3,2	SNHU 1204		689,70	**063**		
A491.80.R.06-12	80	6	8	50	58	27	7400	3,2	SNHU 1204				689,70	**080**
A491.80.R.08-12	80	8	8	50	58	27	7400	3,2	SNHU 1204		795,70	**080**		
A491.100.R.07-12	100	7	8	50	78	32	6500	3,2	SNHU 1204				875,20	**100**
A491.100.R.10-12	100	10	8	50	78	32	6500	3,2	SNHU 1204		994,70	**100**		
A491.125.R.08-12	125	8	8	63	88	40	5700	3,2	SNHU 1204				1.061,00	**125**
A491.125.R.12-12	125	12	8	63	88	40	5700	3,2	SNHU 1204		1.220,00	**125**		
A491.160.R.09-12	160	9	8	63	98	40	5000	3,2	SNHU 1204				1.233,00	**160** [1]
A491.160.R.14-12	160	14	8	63	98	40	5000	3,2	SNHU 1204		1.433,00	**160** [1]		

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		**80 397 ...**		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7	
40	6,78	**054**	5,04	**040**	15,33	**128**	16,08	**151**	5,64	**303**	4,14	**859**	170,10	**193**
50 - 160	6,78	**054**			15,33	**128**			5,64	**303**	4,14	**859**	170,10	**193**

SNHU

Designation	IC mm	L mm	S mm	D1 mm
SNHU 1204..	12,2	12,2	5,00	4,4



SNHU

		-M50 CTCP230	-M50 CTPP235	-F50 CTPM240	-M50 CTPM240	-F40 CTPM245	-F40 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		SNHU	SNHU	SNHU	SNHU	SNHU	SNHU
		51 100 ...	51 100 ...	51 102 ...	51 100 ...	51 128 ...	51 128 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
120408ER	0,8					43,33 45800	43,33 90801
120408SR	0,8	35,25 008	35,25 108	35,25 408	35,25 408		
120412SR	1,2		35,25 112	35,25 412			
120416SR	1,6		35,25 116	35,25 416			
120420SR	2,0		35,25 120	35,25 420			
P		●	●	○	○	●	●
M			○	●	●	●	●
K		○	○				
N							
S							○
H							
O							

SNHU

ISO	RE mm	-R50 CTCK215 DRAGONSKIN		-R50 CTPK220 DRAGONSKIN		NEW -F10 CTPX715 DRAGONSKIN		-F10 CTWN215		-F40 CTC5240 DRAGONSKIN		-F40 CTCS245 DRAGONSKIN	
		 SNHU		 SNHU		SNHU		SNHU		 SNHU		SNHU	
		51 103 ...		51 103 ...		51 101 ...		51 101 ...		51 128 ...		51 128 ...	
		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1H/17		EUR 1H/17	
120408ER	0,8									43,33	15800	43,33	55800
120408FR	0,8					42,46	00802	35,25	358				
120408SR	0,8	35,25	508	35,25	608								
120412FR	1,2							35,25	362				
120412SR	1,2	35,25	512										
120416FR	1,6							35,25	366				
120416SR	1,6	35,25	516										
120420FR	2,0							35,25	370				
120420SR	2,0	35,25	520										
P						○							
M						○							
K		●		●		●		○					
N						●		●					
S						○				●		●	
H													
O						○		○					

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 159
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – 211-07 Screw in cutter



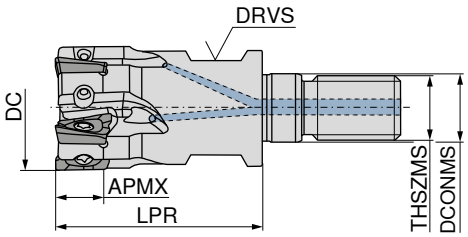

Designation	DC mm	ZNF	APMX mm	LPR mm	DCONMS mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	50 751 ... EUR 2B/40	
G211.16.R.04-07	16	4	6	27	8,5	M8	10	50400	1	XD.T 0703	338,90	016
G211.20.R.05-07	20	5	6	33	10,5	M10	15	44280	1	XD.T 0703	378,20	020
G211.25.R.06-07	25	6	6	35	12,5	M12	17	39480	1	XD.T 0703	441,20	025
G211.32.R.08-07	32	8	6	35	17,0	M16	24	36240	1	XD.T 0703	480,30	032

MaxiMill – 211-07 End milling cutter



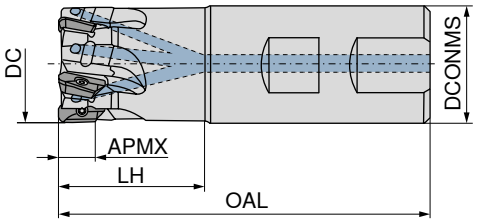

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS mm	RPMX 1/min.	torque moment Nm	Insert	50 752 ... EUR 2B/40		50 752 ... EUR 2B/40	
C211.10.R.01-07-A-20	10	1	6	61,0	20	10	72000	1	XD.T 0703	268,20	010		
C211.12.R.02-07-A-20	12	2	6	66,5	20	12	66600	1	XD.T 0703	307,30	012		
C211.16.R.04-07-A/B-25	16	4	6	74,5	25	16	50400	1	XD.T 0703	338,90	016	338,90	216
C211.16.R.03-07-A-32-165	16	3	6	165,0	32	16	17760	1	XD.T 0703	315,20	116		
C211.20.R.05-07-A/B-25	20	5	6	77,0	25	20	44280	1	XD.T 0703	378,20	020	378,20	220
C211.20.R.04-07-A-40-200	20	4	6	200,0	40	20	12600	1	XD.T 0703	354,50	120		
C211.25.R.06-07-A/B20-32	25	6	6	84,0	32	20	39840	1	XD.T 0703	441,20	025	441,20	225
C211.25.R.05-07-A20-50-225	25	5	6	225,0	50	20	11280	1	XD.T 0703	394,00	125		
C211.32.R.08-07-A/B25-40	32	8	6	98,0	40	25	36240	1	XD.T 0703	480,30	032	480,30	232

MaxiMill – 211-07 Shell mill







										50 753 ...		50 754 ...		
Designation	DC	ZNF	APMX	OAL	DCONMS $_{H6}$	DHUB	RPMX	torque moment	Insert	EUR		EUR		
	mm		mm	mm	mm	mm	1/min.	Nm		2B/40		2B/40		
A211.32.R.06-07	32	6	6	40	16	38	36240	1	XD.T 0703	402,00	**032**			
A211.32.R.08-07	32	8	6	40	16	38	36240	1	XD.T 0703			449,20	**032**	
A211.40.R.08-07	40	8	6	40	16	38	33240	1	XD.T 0703	496,40	**040**			
A211.40.R.10-07	40	10	6	40	16	38	33240	1	XD.T 0703			543,70	**040**	
A211.50.R.10-07	50	10	6	40	22	43	30480	1	XD.T 0703	590,90	**050**			
A211.50.R.12-07	50	12	6	40	22	43	30480	1	XD.T 0703			638,00	**050**	

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		80 397 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7	
10 - 32	6,78	**051**			13,18	**124**			5,64	**303**	4,19	**137**	153,30	**191**
32	6,78	**051**	5,04	**040**	13,18	**124**	16,08	**151**	5,64	**303**	4,19	**137**	153,30	**191**
40 - 50	6,78	**051**			13,18	**124**			5,64	**303**	4,19	**137**	153,30	**191**

XDKT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDKT 0703..	4,9	2,5	7,8	1,2	3,18



XDKT

XDKT

		-F50 CTCP230 DRAGONSKIN	-M50 CTCP230 DRAGONSKIN	-F50 CTPP235 DRAGONSKIN	-M50 CTPP235 DRAGONSKIN
					
		F XDKT	M XDKT	F XDKT	M XDKT
		51 033 ...	51 036 ...	51 033 ...	51 036 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
070304SR	0,4	15,19 004	15,19 004	15,19 104	15,19 104
070308SR	0,8	15,19 008	15,19 008	15,19 108	15,19 108
P		●	●	●	●
M				○	○
K		○	○	○	○
N					
S					
H					
O					

XDKT

		-F50 CTPM240 DRAGONSKIN	-M50 CTPM240 DRAGONSKIN	-F40 CTPM245 DRAGONSKIN	-F40 CTCM245 DRAGONSKIN	-F20 CTWN215	-F40 CTC5240 DRAGONSKIN	-F40 CTCS245 DRAGONSKIN
								
		F XDKT	M XDKT	F XDKT	F XDKT	F XDKT	F XDKT	F XDKT
		51 033 ...	51 036 ...	51 112 ...	51 112 ...	50 507 ...	50 498 ...	51 112 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1A/90	EUR 1H/17	EUR 1H/17
070304ER	0,4			18,15 454	18,15 90401		18,15 544	
070304FR	0,4					18,69 504		
070304SR	0,4	15,19 404	15,19 404					
070308ER	0,8			18,15 458	18,15 90801		18,15 548	18,15 558
070308FR	0,8					18,69 508		
070308SR	0,8	15,19 408	15,19 408					
P		○	○	●	●			
M		●	●	●	●			
K						○		
N						●		
S					○		●	●
H								
O						○		

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 160
Starting Parameter	→ 160	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 211-11 Screw in cutter

▲ Insert radius >1,6 mm: Modify cutter body



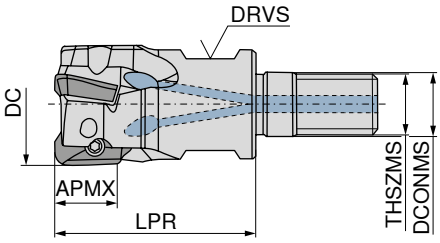

Designation	DC mm	ZNF	APMX mm	LPR mm	DCONMS mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	50 736 ... EUR 2B/40	
G211.16.R.02-11	16	2	10	27	8,5	M8	10	42000	1,6	XD.T 11T3	291,50	016
G211.20.R.03-11	20	3	10	33	10,5	M10	15	36900	1,6	XD.T 11T3	331,00	020
G211.25.R.03-11	25	3	10	35	12,5	M12	17	33200	1,6	XD.T 11T3	346,60	12500
G211.25.R.04-11	25	4	10	35	12,5	M12	17	33200	1,6	XD.T 11T3	370,50	025
G211.32.R.04-11	32	4	10	35	17,0	M16	24	30200	1,6	XD.T 11T3	386,20	13200
G211.32.R.05-11	32	5	10	35	17,0	M16	24	30200	1,6	XD.T 11T3	409,90	032
G211.40.R.06-11	40	6	10	35	17,0	M16	27	27700	1,6	XD.T 11T3	449,20	040

MaxiMill – 211-11 End milling cutter

▲ Insert radius >1,6 mm: Modify cutter body



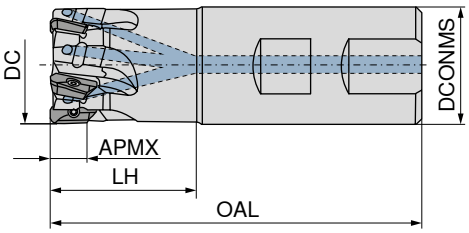

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS h6 mm	RPMX 1/min.	torque moment Nm	Insert	50 737 ... EUR 2B/40		50 737 ... EUR 2B/40	
C211.12.R.01-11-B-20	12	1	10	75	20	16	55000	1,6	XD.T 11T3			260,10	012
C211.16.R.02-11-A/B-25	16	2	10	75	25	16	42000	1,6	XD.T 11T3	291,50	116	291,50	016
C211.16.R.02-11-A15-32-165	16	2	10	165	32	15	14800	1,6	XD.T 11T3	291,50	316		
C211.16.R.02-11-A-32-165	16	2	10	165	32	16	14800	1,6	XD.T 11T3	291,50	216		
C211.20.R.03-11-A-25	20	3	10	77	25	20	36900	1,6	XD.T 11T3	331,00	120		
C211.20.R.03-11-B-25	20	3	10	77	25	20	36900	1,6	XD.T 11T3			331,00	020
C211.20.R.02-11-B-25	20	2	10	77	25	20	36900	1,6	XD.T 11T3			307,30	02002
C211.20.R.02-11-A-25	20	2	10	77	25	20	36900	1,6	XD.T 11T3	307,30	12002		
C211.20.R.03-11-A-32-165	20	3	10	165	32	20	15800	1,6	XD.T 11T3	331,00	320		
C211.20.R.02-11-A-40-200	20	2	10	200	40	20	10500	1,6	XD.T 11T3	307,30	420		
C211.20.R.02-11-A19-40-200	20	2	10	200	40	19	10500	1,6	XD.T 11T3	307,30	620		
C211.25.R.03-11-A/B-32	25	3	10	90	32	25	33200	1,6	XD.T 11T3	346,80	625	346,80	725
C211.25.R.04-11-A/B-32	25	4	10	90	32	25	33200	1,6	XD.T 11T3	370,50	125	370,50	025
C211.25.R.04-11-A-40-165	25	4	10	165	40	25	19900	1,6	XD.T 11T3	370,50	325		
C211.25.R.03-11-A-50-225	25	3	10	225	50	25	9400	1,6	XD.T 11T3	346,80	425		
C211.25.R.03-11-A24-50-225	25	3	10	225	50	24	9400	1,6	XD.T 11T3	346,80	825		
C211.25.R.02-11-A-50-225	25	2	10	225	50	25	9400	1,6	XD.T 11T3	323,30	02502		
C211.32.R.04-11-A-40	32	4	10	102	40	32	30200	1,6	XD.T 11T3	386,20	13204		
C211.32.R.05-11-A/B-40	32	5	10	102	40	32	30200	1,6	XD.T 11T3	409,90	132	409,90	032
C211.32.R.04-11-B-25	32	4	10	102	40	32	30200	1,6	XD.T 11T3			386,20	83200
C211.32.R.05-11-B25-40	32	5	10	102	40	25	30200	1,6	XD.T 11T3			409,90	73200
C211.32.R.04-11-A25-40	32	4	10	102	40	25	30200	1,6	XD.T 11T3	386,20	53204		
C211.32.R.05-11-A-50-165	32	5	10	165	50	32	20900	1,6	XD.T 11T3	409,90	332		
C211.32.R.04-11-A-64-250	32	4	10	250	64	32	8500	1,6	XD.T 11T3	386,20	432		
C211.40.R.06-11-B32-50	40	6	10	110	50	32	27700	1,6	XD.T 11T3			449,20	04000
C211.40.R.06-11-B-50	40	6	10	122	50	40	27700	1,6	XD.T 11T3			449,20	14000

MaxiMill – 211-11 Shell mill

▲ Insert radius >1,6 mm: Modify cutter body







										50 738 ...		**50 739 ...**	
Designation	DC mm	ZNF	APMX mm	OAL mm	DCONMS $_{H6}$ mm	DHUB mm	RPMX 1/min.	torque moment Nm	Insert	**EUR** 2B/40		**EUR** 2B/40	
A211.40.R.04-11	40	4	10	40	16	38	27700	1,6	XD.T 11T3	402,00	**040**		
A211.40.R.06-11	40	6	10	40	16	38	27700	1,6	XD.T 11T3			449,20	**040**
A211.50.R.05-11	50	5	10	40	22	43	25400	1,6	XD.T 11T3	472,70	**050**		
A211.50.R.08-11	50	8	10	40	22	43	25400	1,6	XD.T 11T3			543,80	**050**
A211.63.R.06-11	63	6	10	40	22	48	23300	1,6	XD.T 11T3	543,80	**063**		
A211.63.R.10-11	63	10	10	40	22	48	23300	1,6	XD.T 11T3			638,30	**063**
A211.80.R.07-11	80	7	10	50	27	58	21300	1,6	XD.T 11T3	614,80	**080**		
A211.80.R.10-11	80	10	10	50	27	58	21300	1,6	XD.T 11T3			685,60	**180**
A211.80.R.12-11	80	12	10	50	27	58	21300	1,6	XD.T 11T3			732,90	**08012**
A211.100.R.08-11	100	8	10	50	32	78	19600	1,6	XD.T 11T3	685,60	**10000**		
A211.100.R.14-11	100	14	10	50	32	78	19600	1,6	XD.T 11T3			827,50	**10014**
A211.125.R.10-11	125	10	10	63	40	88	17900	1,6	XD.T 11T3	748,60	**12500**		

TORX® blade

Clamping key – T

Key D

Power Screw

Molykote

Clamping screw

Torque screwdriver

	80 950 ...		**80 397 ...**		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts **DC**	**EUR** Y7		**EUR** Y7		**EUR** Y7		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28		**EUR** Y7	
12	6,13	**043**			13,16	**125**			5,64	**303**	5,17	**92000**	153,30	**191**
16 - 32	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**128**	153,30	**191**
40	6,13	**043**	5,04	**040**	13,16	**125**	16,08	**151**	5,64	**303**	5,27	**131**	153,30	**191**
50	6,13	**043**	5,46	**050**	13,16	**125**	22,09	**154**	5,64	**303**	5,27	**131**	153,30	**191**
63 - 125	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**131**	153,30	**191**

MaxiMill – 211-11KN shell end mill shank

▲ ZEFP = Number of inserts
▲ ZNP = Number of teeth



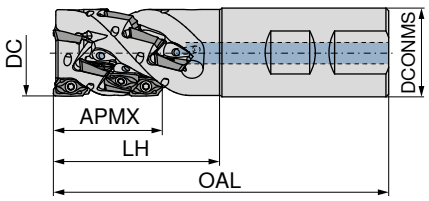

50 784 ...

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS mm	ZEFP	ZNP	torque moment Nm	Insert	EUR 2B/40	
C211.25.R.02KN3-11-B-40	25	2	28	97	40	25	6	3	1,6	XD.T 11T3	803,50	**02523**
C211.25.R.02KN4-11-B-50	25	2	37	107	50	25	8	4	1,6	XD.T 11T3	850,70	**02524**
C211.25.R.02KN5-11-B-60	25	2	46	117	60	25	10	5	1,6	XD.T 11T3	907,30	**02525**
C211.32.R.02KN4-11-B-50	32	2	37	111	50	32	8	4	1,6	XD.T 11T3	881,30	**03224**
C211.32.R.03KN5-11-B-60	32	3	46	121	60	32	15	5	1,6	XD.T 11T3	1.063,00	**03235**
C211.40.R.03KN4-11-B32-50	40	3	37	111	50	32	12	4	1,6	XD.T 11T3	1.011,00	**04034**
C211.40.R.04KN5-11-B32-60	40	4	46	121	60	32	20	5	1,6	XD.T 11T3	1.219,00	**04045**

MaxiMill – 211-11KN shell end face mill

▲ ZEFP = Number of inserts
▲ ZNP = Number of teeth



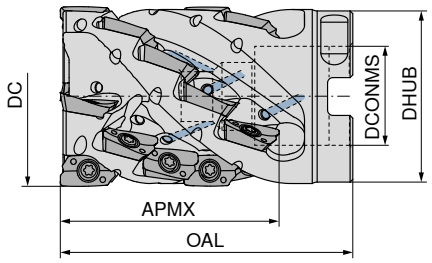



50 794 ...

Designation	DC mm	ZNF	APMX mm	ZEFP	ZNP	OAL mm	DCONMS H6 mm	DHUB mm	torque moment Nm	Insert	EUR 2B/40	
A211.40.R.03KN4-11	40	3	37	12	4	65	22	38	1,6	XD.T 11T3	1.011,00	**04034**
A211.40.R.04KN4-11	40	4	37	16	4	65	22	38	1,6	XD.T 11T3	1.106,00	**04044**
A211.40.R.04KN5-11	40	4	46	20	5	74	22	38	1,6	XD.T 11T3	1.219,00	**04045**
A211.50.R.04KN5-11	50	4	46	20	5	75	27	48	1,6	XD.T 11T3	1.333,00	**05045**
A211.50.R.05KN5-11	50	5	46	25	5	75	27	48	1,6	XD.T 11T3	1.451,00	**05055**
A211.50.R.05KN6-11	50	5	55	30	6	85	27	48	1,6	XD.T 11T3	1.591,00	**05056**

Cylindrical screw

TORX® blade

Key D

Molykote

Clamping screw

Socket head screw

Torque screwdriver

	70 950 ...		80 950 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
Designation	2A/28		Y7		Y7		2A/28		2A/28		2A/28		Y7	
A211.40.R.03KN4-11			6,13	043	13,16	125	5,64	303	9,14	20400	15,11	20900	153,30	191
A211.40.R.04KN4-11			6,13	043	13,16	125	5,64	303	9,14	20400	15,11	20900	153,30	191
A211.40.R.04KN5-11			6,13	043	13,16	125	5,64	303	9,14	20400	15,11	21000	153,30	191
A211.50.R.04KN5-11	14,82	002	6,13	043	13,16	125	5,64	303	9,14	20400	10,89	181	153,30	191
A211.50.R.05KN5-11	14,82	002	6,13	043	13,16	125	5,64	303	9,14	20400	10,89	181	153,30	191
A211.50.R.05KN6-11	14,82	002	6,13	043	13,16	125	5,64	303	9,14	20400	10,89	181	153,30	191
C211.25.R.02KN3-11-B-40			6,13	043	13,16	125	5,64	303	9,14	20700			153,30	191
C211.25.R.02KN4-11-B-50			6,13	043	13,16	125	5,64	303	9,14	20700			153,30	191
C211.25.R.02KN5-11-B-60			6,13	043	13,16	125	5,64	303	9,14	20700			153,30	191
C211.32.R.02KN4-11-B-50			6,13	043	13,16	125	5,64	303	9,14	20700			153,30	191
C211.32.R.03KN5-11-B-60			6,13	043	13,16	125	5,64	303	9,14	20700			153,30	191
C211.40.R.03KN4-11-B32-50			6,13	043	13,16	125	5,64	303	9,14	20400			153,30	191
C211.40.R.04KN5-11-B32-60			6,13	043	13,16	125	5,64	303	9,14	20400			153,30	191

XDKT / XDHT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XD.T 11T302..	6,8	2,8	10,6	2	3,80
XD.T 11T304..	6,8	2,8	10,6	1,8	3,80
XD.T 11T308..	6,8	2,8	10,6	1,4	3,80
XD.T 11T312..	6,8	2,8	10,6	1,4	3,80
XD.T 11T316..	6,8	2,8	10,6	1,4	3,80
XD.T 11T320..	6,8	2,8	10,6	1,4	3,80
XD.T 11T325..	6,8	2,8	10,6	1,4	3,80
XD.T 11T332..	6,8	2,8	10,6	0,8	3,80
XD.T 11T340..	6,8	2,8	10,6	-	3,80
XDHT 11T350..	6,8	2,8	10,6	-	3,80
XDKT 11T332..	6,8	2,8	10,6	1,4	3,80



XDKT

XDKT

		-F50 CTCP220	-M50 CTCP220	-F50 CTPP225	-M50 CTPP225
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		F	M	F	M
		XDKT	XDKT	XDKT	XDKT
		51 034 ...	51 037 ...	51 034 ...	51 037 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
11T308SR	0,8	18,48 **258**	18,48 **258**	18,48 **058**	18,48 **058**
P		●	●	●	●
M					
K					
N					
S					
H					
O					

XDKT

		-F50 CTCP230	-M50 CTCP230	-R50 CTCP230	-F50 CTPP235	-M50 CTPP235	-R50 CTPP235
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		F	M	R	F	M	R
		XDKT	XDKT	XDKT	XDKT	XDKT	XDKT
		51 034 ...	51 037 ...	51 039 ...	51 034 ...	51 037 ...	51 039 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
11T304SR	0,4	18,48 **004**	18,48 **004**	18,48 **004**	18,48 **104**	18,48 **104**	18,48 **104**
11T308SR	0,8	18,48 **008**	18,48 **008**	18,48 **008**	18,48 **108**	18,48 **108**	18,48 **108**
11T312SR	1,2		18,48 **012**			18,48 **112**	
11T320SR	2,0	18,48 **020** 1)	18,48 **020** 1)	18,48 **020** 1)	18,48 **120** 1)	18,48 **120** 1)	18,48 **120** 1)
11T325SR	2,5	18,48 **025** 1)	18,48 **025** 1)	18,48 **025** 1)	18,48 **125** 1)	18,48 **125** 1)	18,48 **125** 1)
P		●	●	●	●	●	●
M					○	○	○
K		○	○	○	○	○	○
N							
S							
H							
O							

1) Insert radius >1.6 mm: Modify cutter body

XDKT

		-F50 CTPM225		-M50 CTPM225		-R50 CTPM225		-F50 CTCM235		-M50 CTCM235		-R50 CTCM235	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
													
		F		M		R		F		M		R	
		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT	
		51 034 ...		51 037 ...		51 039 ...		51 034 ...		51 037 ...		51 039 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
11T308SR	0,8	18,48	208	18,48	208	18,48	208	18,48	308	18,48	308	18,48	308
P			●		●		●		●		●		●
M			●		●		●		●		●		●
K													
N													
S													
H													
O													

XDKT

		-F50 CTPM240		-M50 CTPM240		-R50 CTPM240		-F40 CTPM245		-F50 CTPM245		-F40 CTCM245		-F50 CTCM245	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
															
		F		M		R		F		F		F		F	
		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT	
		51 034 ...		51 037 ...		51 039 ...		51 113 ...		51 034 ...		51 113 ...		51 034 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1H/17		EUR 1H/17		EUR 1H/17		EUR 1H/17	
11T304ER	0,4							23,76	454			23,76	90401		
11T304SR	0,4			18,48	404										
11T308ER	0,8							23,76	458			23,76	90801		
11T308SR	0,8	18,48	408	18,48	408	18,48	408			23,76	458			23,76	90801
11T312ER	1,2							23,76	462			23,76	91201		
11T312SR	1,2	18,48	412	18,48	412	18,48	412								
11T316ER	1,6							23,76	466			23,76	91601		
11T320ER	2,0							23,76	470 1)			23,76	92001 1)		
11T320SR	2,0	18,48	420 1)	18,48	420 1)	18,48	420 1)								
11T325ER	2,5							23,76	475 1)			23,76	92501 1)		
11T332ER	3,2							23,76	482 1)			23,76	93201 1)		
11T332SR	3,2	18,48	432 1)	18,48	432 1)	18,48	432 1)								
11T340ER	4,0							23,76	490 1)			23,76	94001 1)		
P			○		○		○		●		●		●		●
M			●		●		●		●		●		●		●
K															
N															
S													○		○
H															
O															

1) Insert radius >1.6 mm: Modify cutter body

15

XDKT / XDHT

		-M50 CTCK215 DRAGONSKIN		-R50 CTCK215 DRAGONSKIN		-M50 CTPK220 DRAGONSKIN		-F20 CTWN215		NEW -F10 CTPX715 DRAGONSKIN		-27P H216T	
													
		M		R		M		F		F		F	
		XDKT		XDKT		XDKT		XDKT		XDHT		XDHT	
		51 037 ...		51 039 ...		51 037 ...		50 478 ...		51 155 ...		50 477 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1A/90		EUR 1A/90		EUR 1A/90	
11T302FR	0,2							18,48	502	26,51	00202	24,35	502
11T304FR	0,4							18,48	504	26,51	00402	24,35	504
11T304SR	0,4	18,48	504										
11T308FR	0,8							18,48	508	26,51	00802	24,35	508
11T308SR	0,8	18,48	508	18,48	508	18,48	608						
11T312FR	1,2									26,51	01202	24,35	512
11T316FR	1,6									26,51	01602	24,35	516
11T320FR	2,0							18,48	520 1)	26,51	02002 1)	24,35	520 1)
11T325FR	2,5							18,48	525 1)	26,51	02502 1)	24,35	525 1)
11T332FR	3,2									26,51	03202 1)	24,35	532 1)
11T340FR	4,0									26,51	04002 1)	24,35	540 1)
11T350FR	5,0									26,51	05002 1)	24,35	550 1)
P										○			
M										○			
K		●		●		●		○		●		○	
N								●		●		●	
S										○			
H													
O								○		○		○	

1) Insert radius >1.6 mm: Modify cutter body

XDKT

		-F40 CTC5240 DRAGONSKIN		-F40 CTCS245 DRAGONSKIN		-R60 CTP6215	
							
		F		F		R	
		XDKT		XDKT		XDKT	
		50 463 ...		51 113 ...		50 464 ...	
ISO	RE mm	EUR 1H/17		EUR 1H/17		EUR 1B/61	
11T304ER	0,4	23,76	504				
11T308ER	0,8	23,76	500	23,76	558		
11T308SR	0,8					23,89	300
11T312ER	1,2	23,76	512	23,76	562		
11T316ER	1,6	23,76	516	23,76	566		
11T320ER	2,0	23,76	520 1)	23,76	570		
11T325ER	2,5	23,76	525 1)	23,76	57500 1)		
11T332ER	3,2	23,76	532 1)	23,76	582		
11T340ER	4,0	23,76	540 1)	23,76	59000 1)		
P							
M							
K						●	
N							
S		●		●			
H						●	
O							

1) Insert radius >1.6 mm: Modify cutter body

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 161
Starting Parameter	→ 161	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 211-15 Screw in cutter

▲ Insert radius >2,5 mm: Modify cutter body



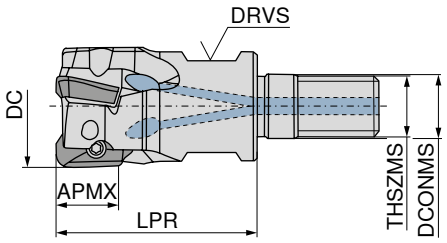



Designation	DC	ZNF	APMX	LPR	DCONMS	THSZMS	DRVS	RPMX	torque moment	Insert	50 746 ... EUR 2B/40	
	mm		mm	mm	mm		mm	1/min.	Nm			
G211.25.R.02-15	25	2	14	35	12,5	M12	17	26560	3,2	XD.T 1505	334,70	**025**
G211.32.R.03-15	32	3	14	35	17,0	M16	24	30200	3,2	XD.T 1505	372,70	**032**
G211.40.R.04-15	40	4	14	40	17,0	M16	27	27700	3,2	XD.T 1505	411,10	**040**

MaxiMill – 211-15 End milling cutter

▲ Insert radius >2,5 mm: Modify cutter body



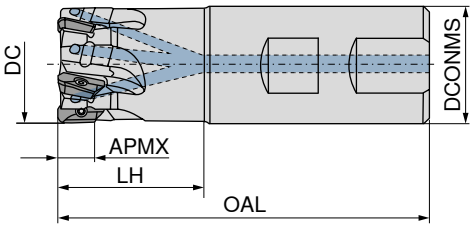

Designation	DC	ZNF	APMX	OAL	LH	DCONMS	RPMX	torque moment	Insert	50 747 ... EUR 2B/40		50 747 ... EUR 2B/40	
	mm		mm	mm	mm	mm	1/min.	Nm					
C211.25.R.02-15-B20-32	25	2	14	83	32	20	26560	3,2	XD.T 1505			334,70	**125**
C211.25.R.02-15-B/A-32	25	2	14	90	32	25	26560	3,2	XD.T 1505	334,70	**225**	334,70	**025**
C211.25.R.02-15-A-50-225	25	2	14	225	50	25	7520	3,2	XD.T 1505	312,00	**325**		
C211.32.R.03-15-B25-40	32	3	14	96	40	25	22160	3,2	XD.T 1505			372,70	**132**
C211.32.R.03-15-A-40	32	3	14	103	40	32	24160	3,2	XD.T 1505	372,70	**232**		
C211.32.R.03-15-B-40	32	3	14	103	40	32	24160	3,2	XD.T 1505			372,70	**032**
C211.32.R.03-15-A-63-250	32	3	14	250	63	32	6800	3,2	XD.T 1505	350,10	**332**		
C211.40.R.04-15-A-50	40	4	14	110	50	32	22160	3,2	XD.T 1505	411,10	**240**		
C211.40.R.04-15-B32-50	40	4	14	110	50	32	22160	3,2	XD.T 1505			411,10	**040**
C211.40.R.03-15-A-50-275	40	3	14	275	50	32	6120	3,2	XD.T 1505	387,90	**340**		

MaxiMill – 211-15 Shell mill

▲ Insert radius >2,5 mm: Modify cutter body







Designation	DC mm	ZNF	APMX mm	OAL mm	DCONMS H6 mm	DHUB mm	RPMX 1/min.	torque moment Nm	Insert	50 748 ... EUR 2B/40		50 749 ... EUR 2B/40	
A211.40.R.03-15	40	3	14	40	16	38	22160	3,2	XD.T 1505	365,30	**040**		
A211.40.R.04-15	40	4	14	40	16	38	22160	3,2	XD.T 1505			411,10	**040**
A211.50.R.03-15	50	3	14	40	22	43	20320	3,2	XD.T 1505	433,70	**050**		
A211.50.R.05-15	50	5	14	40	22	43	20320	3,2	XD.T 1505			479,40	**050**
A211.63.R.04-15	63	4	14	45	22	48	18640	3,2	XD.T 1505	524,90	**063**		
A211.63.R.06-15	63	6	14	45	22	48	18640	3,2	XD.T 1505			571,10	**063**
A211.80.R.05-15	80	5	14	50	27	58	17040	3,2	XD.T 1505	593,40	**080**		
A211.80.R.08-15	80	8	14	50	27	58	17040	3,2	XD.T 1505			639,00	**080**
A211.100.R.06-15	100	6	14	50	32	78	15680	3,2	XD.T 1505	662,10	**100**		
A211.100.R.10-15	100	10	14	50	32	78	15680	3,2	XD.T 1505			707,60	**100**
A211.125.R.07-15	125	7	14	63	40	88	14320	3,2	XD.T 1505	699,90	**125**		
A211.125.R.11-15	125	11	14	63	40	88	14320	3,2	XD.T 1505			745,60	**125**
A211.160.R.08-15	160	8	14	63	40	93	13200	3,2	XD.T 1505	980,60	**160** 1)		
A211.160.R.12-15	160	12	14	63	40	93	13200	3,2	XD.T 1505			1.026,00	**160** 1)

1) Without Through Coolant

Spare parts DC	TORX® blade 80 950 ... EUR Y7		Clamping key – T 80 397 ... EUR Y7		Key D 80 950 ... EUR Y7		Power Screw 70 950 ... EUR 2A/28		Molykote 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7	
25 - 32	6,78	**054**			15,33	**128**			5,64	**303**	4,11	**839**	170,10	**193**
40	6,78	**054**	5,04	**040**	15,33	**128**	16,08	**151**	5,64	**303**	4,11	**839**	170,10	**193**
50	6,78	**054**	5,46	**050**	15,33	**128**	22,09	**154**	5,64	**303**	4,11	**839**	170,10	**193**
63 - 160	6,78	**054**			15,33	**128**			5,64	**303**	4,11	**839**	170,10	**193**

MaxiMill – 211-15KN shell end mill shank

▲ ZEFP = Number of Inserts
▲ ZNP = Number of rows



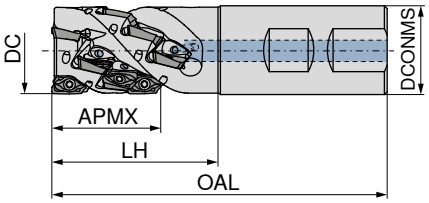



Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS mm	ZEFP	ZNP	torque moment Nm	Insert	50 783 ... EUR 2B/40	
C211.40.R.03KN3-15-B32-60	40	3	39,6	121	60	32	9	3	3,2	XD.T 1505	940,40	**04033**
C211.50.R.03KN4-15-B40-68	50	3	52,6	138	67	40	12	4	3,2	XD.T 1505	1.144,00	**05034**

MaxiMill – 211-15KN shell end face mill

▲ ZEFP = Number of Inserts
▲ ZNP = Number of rows



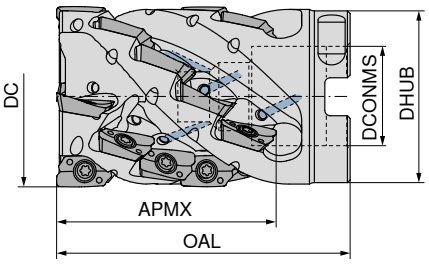

Designation	DC mm	ZNF	APMX mm	ZEFP	ZNP	OAL mm	DCONMS $_{H6}$ mm	DHUB mm	torque moment Nm	Insert	50 781 ... EUR 2B/40	
A211.50.R.03KN4-15	50	3	52,6	12	4	87	27	48	3,2	XD.T 1505	1.144,00	**05034**
A211.50.R.03KN5-15	50	3	65,8	15	5	100	27	48	3,2	XD.T 1505	1.215,00	**05035**
A211.50.R.04KN5-15	50	4	65,8	20	5	100	27	48	3,2	XD.T 1505	1.353,00	**05045**
A211.63.R.03KN4-15	63	3	52,6	12	4	76	27	58	3,2	XD.T 1505	1.248,00	**06334**
A211.63.R.03KN5-15	63	3	65,8	15	5	90	27	58	3,2	XD.T 1505	1.318,00	**06335**
A211.63.R.04KN6-15	63	4	78,5	24	6	102	27	58	3,2	XD.T 1505	1.530,00	**06346**
A211.63.R.05KN5-15	63	5	65,8	25	5	90	27	58	3,2	XD.T 1505	1.584,00	**06355**
A211.80.R.04KN5-15	80	4	65,8	20	5	90	32	78	3,2	XD.T 1505	1.537,00	**08045**
A211.80.R.05KN6-15	80	5	78,5	30	6	102	32	78	3,2	XD.T 1505	1.776,00	**08056**

	Cylindrical screw		TORX® blade		 Key D		Molykote		Clamping screw		Socket head screw		Torque screwdriver	
	70 950 ...		80 950 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts Designation	EUR 2A/28		EUR Y7		EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR Y7	
A211.50.R.03KN4-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20800**	10,89	**181**	170,10	**193**
A211.50.R.03KN5-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20800**	10,89	**181**	170,10	**193**
A211.50.R.04KN5-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20800**	10,89	**181**	170,10	**193**
A211.63.R.03KN4-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20500**	10,89	**181**	170,10	**193**
A211.63.R.03KN5-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20500**	10,89	**181**	170,10	**193**
A211.63.R.04KN6-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20500**	10,89	**181**	170,10	**193**
A211.63.R.05KN5-15	14,82	**002**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20500**	10,89	**181**	170,10	**193**
A211.80.R.04KN5-15	33,19	**004**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20500**	14,82	**234**	170,10	**193**
A211.80.R.05KN6-15	33,19	**004**	6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20500**	14,82	**234**	170,10	**193**
C211.40.R.03KN3-15-B32-60			6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20800**			170,10	**193**
C211.50.R.03KN4-15-B40-68			6,78	**054**	15,33	**128**	5,64	**303**	11,57	**20800**			170,10	**193**

XDKT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDKT 150508..	9,3	4,4	14,8	1,6	5,56
XDKT 150512..	9,3	4,4	14,8	1,6	5,56
XDKT 150516..	9,3	4,4	14,8	1,6	5,56
XDKT 150520..	9,3	4,4	14,8	1,6	5,56
XDKT 150525..	9,3	4,4	14,8	1,6	5,56
XDKT 150530..	9,3	4,4	14,8	1,6	5,56
XDKT 150532..	9,3	4,4	14,8	1,9	5,56
XDKT 150540..	9,3	4,4	14,8	1,2	5,56
XDKT 150560..	9,3	4,4	14,8	-	5,56



XDKT

XDKT

		-F50 CTCP220	-M50 CTCP220	-F50 CTPP225	-M50 CTPP225
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
					
		F	M	F	M
		XDKT	XDKT	XDKT	XDKT
		51 035 ...	51 038 ...	51 035 ...	51 038 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
150508SR	0,8	24,65 258	24,65 258	24,65 058	24,65 058
P		●	●	●	●
M					
K					
N					
S					
H					
O					

XDKT

		-F50 CTCP230	-M50 CTCP230	-R50 CTCP230	-F50 CTPP235	-M50 CTPP235	-R50 CTPP235
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		F	M	R	F	M	R
		XDKT	XDKT	XDKT	XDKT	XDKT	XDKT
		51 035 ...	51 038 ...	51 040 ...	51 035 ...	51 038 ...	51 040 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
150508SR	0,8	24,65 008	24,65 008	24,65 008	24,65 108	24,65 108	24,65 108
150512SR	1,2		24,65 012			24,65 112	
150516SR	1,6		24,65 016			24,65 116	
150520SR	2,0			24,65 020		24,65 120	24,65 120
150530SR	3,0		24,65 030 1)			24,65 130 1)	
150540SR	4,0		24,65 040 1)			24,65 140 1)	
P		●	●	●	●	●	●
M					○	○	○
K		○	○	○	○	○	○
N							
S							
H							
O							

1) Insert radius >2.5 mm: Modify cutter body

XDKT

		-F50 CTPM225 DRAGONSKIN		-M50 CTPM225 DRAGONSKIN		-F50 CTCM235 DRAGONSKIN		-M50 CTCM235 DRAGONSKIN	
									
		F XDKT		M XDKT		F XDKT		M XDKT	
		51 035 ...		51 038 ...		51 035 ...		51 038 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
150508SR	0,8	24,65	208	24,65	208	24,65	308	24,65	308
P			●		●		●		●
M			●		●		●		●
K									
N									
S									
H									
O									

XDKT

		-F50 CTPM240 DRAGONSKIN		-M50 CTPM240 DRAGONSKIN		-R50 CTPM240 DRAGONSKIN		-F40 CTPM245 DRAGONSKIN		-F40 CTCM245 DRAGONSKIN	
											
		F XDKT		M XDKT		R XDKT		F XDKT		F XDKT	
		51 035 ...		51 038 ...		51 040 ...		51 114 ...		51 114 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1H/17		EUR 1H/17	
150508ER	0,8							29,66	458	29,66	90801
150508SR	0,8	24,65	408	24,65	408	24,65	408				
150512ER	1,2									29,66	91201
150512SR	1,2			24,65	412						
150516ER	1,6									29,66	91601
150516SR	1,6			24,65	416						
150520ER	2,0									29,66	92001
150525ER	2,5									29,66	92501
150530SR	3,0			24,65	430 [1)]						
150532ER	3,2							29,66	482 [1)]	29,66	93201[1)]
150540ER	4,0							29,66	490 [1)]	29,66	94001[1)]
150540SR	4,0			24,65	440 [1)]						
150560ER	6,0									29,66	96001[1)]
P			○		○		○		●		●
M			●		●		●		●		●
K											
N											
S											○
H											
O											

1) Insert radius >2.5 mm: Modify cutter body

15

XDKT

	-M50 CTCK215	-R50 CTCK215	-M50 CTPK220	-R50 CTPK220	-F20 CTWN215
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	
					
	M	R	M	R	F
	XDKT	XDKT	XDKT	XDKT	XDKT
	51 038 ...	51 040 ...	51 038 ...	51 040 ...	50 479 ...
ISO / RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1A/90
150508FR 0,8					24,65 508
150508SR 0,8	24,65 508	24,65 508	24,65 608	24,65 608	
P					
M					
K	●	●	●	●	○
N					●
S					
H					
O					○

XDKT

	-F40 CTC5240	-F40 CTCS245	-R60 CTP6215
	DRAGONSKIN	DRAGONSKIN	
			
	F	F	R
	XDKT	XDKT	XDKT
	50 473 ...	51 114 ...	50 469 ...
ISO / RE mm	EUR 1H/17	EUR 1H/17	EUR 1B/61
150508ER 0,8	29,66 508	29,66 558	
150508SR 0,8			24,65 300
150532ER 3,2	29,66 532 [1]	29,66 58201 [1]	
150540ER 4,0	29,66 540 [1]	29,66 59000 [1]	
P			
M			
K			●
N			
S	●	●	
H			●
O			

1) Insert radius >2.5 mm: Modify cutter body

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 162
Starting Parameter	→ 162	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 211-20 Shell mill





Designation	DC	ZNF	APMX	OAL	DCONMS $_{H6}$	DHUB	RPMX	torque moment	Insert	50 778 ... EUR 2B/40	
	mm		mm	mm	mm	mm	1/min.	Nm			
A211.63.R.05-20	63	5	19	45	22	48	14400	5	XD.. 2007..	549,00	**06305**
A211.80.R.06-20	80	6	19	50	27	58	12400	5	XD.. 2007..	587,20	**08006**
A211.100.R.07-20	100	7	19	50	32	78	10900	5	XD.. 2007..	630,10	**10007**

MaxiMill – 211-20K shell end face mill

▲ ZEFP = Number of Inserts
▲ ZNP = Number of rows



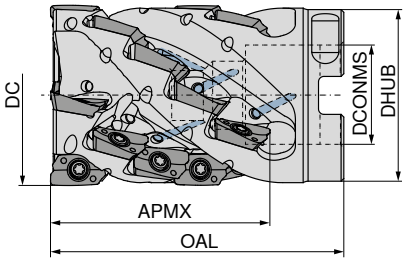

Designation	DC	ZNF	APMX	ZEFP	ZNP	OAL	DCONMS $_{H6}$	DHUB	torque moment	Insert	50 780 ... EUR 2B/40	
	mm		mm			mm	mm	mm	Nm			
A211.63.R.04K4-20	63	4	68	16	4	92	27	58	5	XD.. 2007..	1.216,00	**06304**
A211.80.R.05K4-20	80	5	68	20	4	92	32	76	5	XD.. 2007..	1.363,00	**08005**

	Cylindrical screw		TORX® blade		Key D		Molykote		Clamping screw		Socket head screw		Torque screwdriver	
	70 950 ...		80 950 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	2A/28		Y7		Y7		2A/28		2A/28		2A/28		Y7	
63			6,13	**037**	9,69	**106**	5,64	**303**	3,19	**01200**	7,01	**180**	170,10	**193**
80			6,13	**037**	9,69	**106**	5,64	**303**	3,19	**01200**	10,89	**181**	170,10	**193**
63	20,57	**003**	6,13	**037**	9,69	**106**	5,64	**303**	3,19	**01200**	10,89	**181**	170,10	**193**
80	33,19	**004**	6,13	**037**	9,69	**106**	5,64	**303**	3,19	**01200**	14,82	**234**	170,10	**193**
100			6,13	**037**	9,69	**106**	5,64	**303**	3,19	**01200**			170,10	**193**

XDKT

Designation	IC	D1	L	S
	mm	mm	mm	mm
XDKT 200708..	12,5	5,5	18,8	6,93
XDKT 200716..	12,5	5,5	18,8	6,89
XDKT 200732..	12,5	5,5	18,8	6,82
XDKT 200740..	12,5	5,5	18,8	6,80
XDKT 200760..	12,5	5,5	18,8	6,80



XDKT

XDKT

		-M50 CTPP235	-M50 CTCP230	-F40 CTPM245	-F40 CTCM245	-M50 CTPK220	-F40 CTC5240	-F40 CTCS245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
								
		M	M	F	F	M	F	F
		XDKT	XDKT	XDKT	XDKT	XDKT	XDKT	XDKT
		51 145 ...	51 145 ...	51 127 ...	51 127 ...	51 145 ...	51 127 ...	51 127 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1B/61	EUR 1H/17	EUR 1H/17
200708ER	0,8	28,29 10800	28,29 00800	35,07 45800	35,07 90801	28,29 60800	35,07 15800	35,07 55800
200716ER	1,6	28,29 11600	28,29 01600	35,07 46600	35,07 91601	28,29 61600	35,07 16600	35,07 56600
200732ER	3,2			35,07 48200	35,07 93201		35,07 18200	35,07 58200
200740ER	4,0				35,07 94001		35,07 19000	
200760ER	6,0				35,07 96001		35,07 19200	
P		●	●	●	●			
M		○		●	●			
K		○	○			●		
N								
S					○		●	●
H								
O								

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 163
Starting Parameter	→ 163	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – 490-09 Screw in cutter



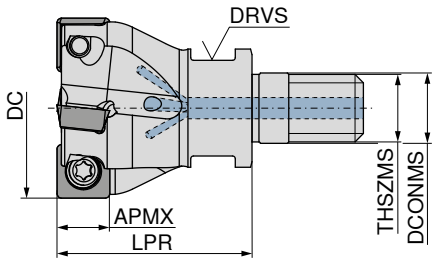

Designation	DC mm	ZNF	APMX mm	LPR mm	THSZMS	DCONMS mm	DRVS mm	torque moment Nm	Insert	50 726 ... EUR 2B/40	
G490.25.R.03-09	25	3	8	35	M12	12,5	17	3,2	SD.. 09T3..	384,70	025
G490.32.R.04-09	32	4	8	35	M16	17,0	24	3,2	SD.. 09T3..	417,20	032

MaxiMill – End milling cutter C 490-09



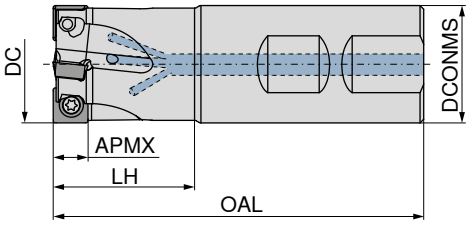

Designation	DC mm	ZNF	APMX mm	DCONMS mm	OAL mm	LH mm	torque moment Nm	Insert	50 727 ... EUR 2B/40		50 727 ... EUR 2B/40	
C490.25.R.03-09-B-32	25	3	8	25	88	32	3,2	SD.. 09T3..			384,70	025
C490.25.R.02-09-A-20	25	2	8	20	165	40	3,2	SD.. 09T3..	354,70	225		
C490.25.R.02-09-A-40-165	25	2	8	25	165	40	3,2	SD.. 09T3..	368,00	125		
C490.32.R.04-09-B-25	32	4	8	25	100	40	3,2	SD.. 09T3..			402,00	132
C490.32.R.04-09-B-40	32	4	8	32	100	40	3,2	SD.. 09T3..			417,20	032

MaxiMill – 490-09 Shell mill







Designation	DC mm	ZNF	APMX mm	DHUB mm	DCONMS H6 mm	OAL mm	torque moment Nm	Insert	50 728 ... EUR 2B/40	
A490.40.R.05-09	40	5	8	38	16	40	3,2	SD.. 09T3..	466,50	040
A490.42.R.06-09	42	6	8	38	16	40	3,2	SD.. 09T3..	498,90	042
A490.50.R.06-09	50	6	8	43	22	40	3,2	SD.. 09T3..	515,40	050
A490.52.R.07-09	52	7	8	43	22	40	3,2	SD.. 09T3..	548,00	052
A490.63.R.07-09	63	7	8	48	22	40	3,2	SD.. 09T3..	564,50	063
A490.66.R.08-09	66	8	8	48	22	40	3,2	SD.. 09T3..	597,10	066
A490.80.R.09-09	80	9	8	58	27	50	3,2	SD.. 09T3..	793,50	080
A490.100.R.10-09	100	10	8	78	32	50	3,2	SD.. 09T3..	867,10	100

MaxiMill – 490-09K shell end face mill

▲ ZEFP = Number of Inserts
▲ ZNP = Number of rows







Designation	DC mm	ZNF	APMX mm	ZEFP	ZNP	OAL mm	DCONMS H6 mm	DHUB mm	torque moment Nm	Insert	50 761 ... EUR 2B/40	
A490.40.R.03K6-09	40	3	41	18	6	55	16	38	3,2	SD.. 09T3..	1.293,00	**040**
A490.50.R.04K6-09	50	4	41	24	6	55	22	48	3,2	SD.. 09T3..	1.564,00	**050**
A490.63.R.05K6-09	63	5	41	30	6	60	27	61	3,2	SD.. 09T3..	1.768,00	**063**

Spare parts DC	TORX® blade 80 950 ... EUR Y7		Clamping key – T 80 397 ... EUR Y7		Key D 80 950 ... EUR Y7		Power Screw 70 950 ... EUR 2A/28		Molykote 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7	
25 - 32	6,13	**036**			11,96	**113**			5,64	**303**	4,14	**110**	165,90	**192**
40 - 42	6,13	**036**	5,04	**040**	11,96	**113**	16,08	**151**	5,64	**303**	4,14	**110**	165,90	**192**
50 - 100	6,13	**036**			11,96	**113**			5,64	**303**	4,14	**110**	165,90	**192**

MaxiMill – 490-09 Adjustable single angle milling cutter



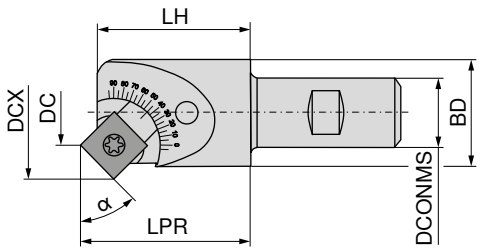

NEW

Designation	DC mm	DCX mm	LH mm	BD mm	LPR mm	ZNF	DCONMS mm	torque moment Nm	Insert	50 690 ... EUR 2B/40	
C490.20.R.01	1,6 - 11,1	20,1 - 23,6	32	18,65	32,9 - 34,6	1	16	3,2	SD.. 09T3..	185,40	**01600**

Spare parts for Article no.	Cylindrical screw 70 950 ... EUR 2A/28		Adjustment wedge 70 950 ... EUR 2B/40		TORX® blade 80 950 ... EUR Y7		Key D 80 950 ... EUR Y7		Molykote 70 950 ... EUR 2A/28		Clamping screw 70 950 ... EUR 2A/28		Torque screwdriver 80 950 ... EUR Y7	
50 690 01600	5,27	**87500**	22,17	**87200**	6,13	**036**	11,96	**113**	5,64	**303**	4,14	**110**	165,90	**192**

Angle-dependent dimensions can be found on → **Page 164**

SDHT / SDNT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SD.T 09T3..	9,52	4,4	9,52	2,5	3,97



SDHT / SDNT

	TCM10	-29 CTCP230	CTPP235	-29 CTPP235	-33 CTPM240	-F50 CTPM245	-F50 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
	CERMET						
	SDHT	SDNT	SDNT	SDNT	SDNT	SDNT	SDNT
	50 424 ...	51 011 ...	51 082 ...	51 011 ...	51 030 ...	51 111 ...	51 111 ...
ISO / RE mm	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
09T308ER 0,8			15,27 108			17,08 458	17,08 90801
09T308SR 0,8	20,72 900	15,27 008		15,27 108	15,27 408		
P	●	●	●	●	○	●	●
M			○	○	●	●	●
K	○	○	○	○			
N							
S							○
H							
O							

SDNT / SDHT

NEW

	-31 CTCK215	-F10 CTPX715	-27P H216T	-27 CTC5240	-M31 CTC5240	-F10 CTCS245
	DRAGONSKIN	DRAGONSKIN		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
						
	SDNT	SDHT	SDHT	SDHT	SDNT	SDHT
	51 029 ...	51 125 ...	50 424 ...	50 496 ...	50 425 ...	51 125 ...
ISO / RE mm	EUR 1B/61	EUR 1A/90	EUR 1A/90	EUR 1H/17	EUR 1H/17	EUR 1H/17
09T308ER 0,8				28,57 508	17,08 508	28,57 55800
09T308FR 0,8		24,84 00802	20,72 550			
09T308SR 0,8	15,27 508					
P		○				
M		○				
K	●	●	○			
N		●	●			
S		○		●	●	●
H						
O		○	○			

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 164
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – 490-12 Shell mill







50 703 ...

Designation	DC mm	ZNF	APMX mm	DHUB mm	DCONMS mm	OAL mm	torque moment Nm	Insert	EUR 2B/40	
A490.40.R.04-12	40	4	11	38	16	40	5	SD.. 1205..	444,00	**54000**
A490.50.R.05-12	50	5	11	43	22	40	5	SD.. 1205..	493,10	**550**
A490.63.R.06-12	63	6	11	48	22	40	5	SD.. 1205..	542,50	**563**
A490.80.R.07-12	80	7	11	58	27	50	5	SD.. 1205..	749,10	**580**
A490.100.R.08-12	100	8	11	75	32	50	5	SD.. 1205..	822,80	**600**
A490.125.R.10-12	125	10	11	88	40	63	5	SD.. 1205..	881,90	**625**

	TORX® blade	Clamping key – T	Key D	Power Screw	Molykote	Clamping screw	Torque screwdriver
	80 950 ...	**80 397 ...**	**80 950 ...**	**70 950 ...**	**70 950 ...**	**70 950 ...**	**80 950 ...**
Spare parts	EUR	EUR	EUR	EUR	EUR	EUR	EUR
DC	Y7	Y7	Y7	2A/28	2A/28	2A/28	Y7
40	6,13 **037**	5,04 **040**	12,83 **114**	16,08 **151**	5,64 **303**	3,19 **01200**	170,10 **193**
50	6,13 **037**	5,04 **040**	12,83 **114**	22,09 **154**	5,64 **303**	3,19 **01200**	170,10 **193**
63 - 125	6,13 **037**	5,04 **040**	12,83 **114**		5,64 **303**	3,19 **01200**	170,10 **193**

MaxiMill – 490-12 Adjustable single angle milling cutter



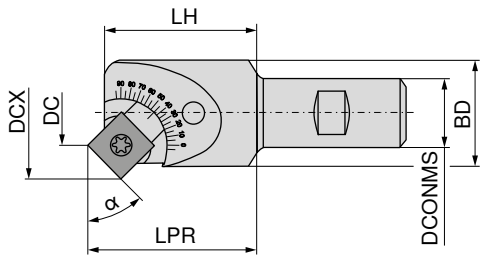

NEW

50 690 ...

Designation	DC mm	DCX mm	LH mm	BD mm	LPR mm	ZNF	DCONMS mm	torque moment Nm	Insert	EUR 2B/40	
C490.26.R.01	1,1 - 14,1	26,6 - 31,5	37	25	38,2 - 40,6	1	20	5	SD.. 1205..	217,60	**02000**

	Cylindrical screw	Adjustment wedge	TORX® blade	Key D	Molykote	Clamping screw	Torque screwdriver
	70 950 ...	**70 950 ...**	**80 950 ...**	**80 950 ...**	**70 950 ...**	**70 950 ...**	**80 950 ...**
Spare parts	EUR	EUR	EUR	EUR	EUR	EUR	EUR
for Article no.	2A/28	2B/40	Y7	Y7	2A/28	2A/28	Y7
50 690 02000	4,15 **87400**	22,17 **87300**	6,13 **037**	12,83 **114**	5,64 **303**	3,19 **01200**	170,10 **193**

Angle-dependent dimensions can be found on → **Page 165**

SDHW / SDMT / SDHT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SDH. 120508..	12,7	5,5	12,7	2,2	5,00
SDHT 120512..	12,7	5,5	12,7	1,8	5,00
SDHT 120520..	12,7	5,5	12,7	1,0	5,00
SDHT 120525..	12,7	5,5	12,7	1,5	5,00
SDMT 120508..	12,7	5,5	12,7	3,0	5,00
SDMT 1205ZZ..	12,7	5,5	12,7	0,9	5,00



SDHW / SDMT / SDHT

	TCM10	-29 CTCP230	-29 CTPP235	-29 CTPM240	-33 CTPM240	-F50 CTPM245	-F50 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
	CERMET						
	SDHW	SDMT	SDMT	SDMT	SDHT	SDMT	SDMT
	50 428 ...	51 081 ...	51 081 ...	51 081 ...	51 028 ...	51 110 ...	51 110 ...
ISO / RE mm	EUR 1B/79	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
120508ER 0,8						24,22 458	24,22 90801
120508SR 0,8	24,65 901						
120512SR 1,2					24,00 412		
120520SR 2,0					24,00 421		
1205ZZSN 0,8		20,72 020	20,72 120	20,04 420			
P	●	●	●	○	○	●	●
M			○	●	●	●	●
K	○	○	○				
N							
S							○
H							
O							

SDMT / SDHT

NEW

	-31 CTCK215	-F10 CTPX715	-27P H216T	-M31 CTC5240	-F50 CTCS245
	DRAGONSKIN	DRAGONSKIN		DRAGONSKIN	DRAGONSKIN
					
	SDMT	SDHT	SDHT	SDMT	SDMT
	51 059 ...	51 161 ...	50 426 ...	50 580 ...	51 110 ...
ISO / RE mm	EUR 1B/61	EUR 1A/90	EUR 1A/90	EUR 1H/17	EUR 1H/17
120508ER 0,8				24,22 508	24,22 55800
120508FR 0,8		29,76 00802	24,00 555		
120525FR 2,5			24,00 559		
1205ZZSN 0,8	20,04 521				
P		○			
M		○			
K	●	●	○		
N		●	●		
S		○		●	●
H					
O		○	○		

Milling guide

Cutting data standard values	→ 145–148	Starting Parameter	→ 165
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – HSC-11 Screw in cutter

▲ Insert radius >3.2 mm: Modify cutter body



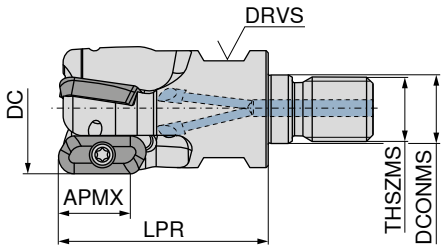

Designation	DC mm	ZNF	APMX mm	DCONMS mm	LPR mm	THSZMS	RPMX 1/min.	DRVS mm	torque moment Nm	Insert	55 107 ... EUR 2B/40	
GHSC.16.R.02-11	16	2	10	8,5	27	M8	56000	10	1,8	XDHT 11T3..	338,80	**016**
GHSC.20.R.02-11	20	2	10	10,5	33	M10	50100	15	1,8	XDHT 11T3..	364,80	**020**
GHSC.25.R.03-11	25	3	10	12,5	35	M12	45000	17	1,8	XDHT 11T3..	411,00	**025**
GHSC.32.R.03-11	32	3	10	17,0	35	M16	39800	24	1,8	XDHT 11T3..	427,10	**032**
GHSC.40.R.03-11	40	3	10	17,0	35	M16	35500	24	1,8	XDHT 11T3..	448,30	**040**

MaxiMill – HSC-11 End milling cutter

▲ Insert radius >3.2 mm: Modify cutter body



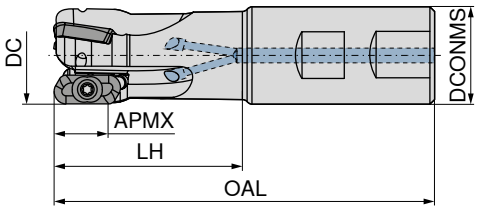

Designation	DC mm	ZNF	APMX mm	DCONMS h6 mm	OAL mm	LH mm	RPMX 1/min.	torque moment Nm	Insert	50 675 ... EUR 2B/40		50 675 ... EUR 2B/40	
CHSC.16.R.02-11-B/A-25	16	2	10	16	75	25	56200	1,8	XDHT 11T3..	338,80	**016**	338,80	**416**
CHSC.16.R.02-11-A-32	16	2	10	16	165	32	18800	1,8	XDHT 11T3..	338,80	**116**		
CHSC.20.R.02-11-A-32	20	2	10	20	84	32	50100	1,8	XDHT 11T3..	364,80	**020**		
CHSC.20.R.03-11-B-32	20	3	10	20	84	32	50100	1,8	XDHT 11T3..			413,80	**420**
CHSC.20.R.02-11-A-40	20	2	10	20	165	40	26700	1,8	XDHT 11T3..	364,80	**120**		
CHSC.25.R.03-11-A-40	25	3	10	25	98	40	45000	1,8	XDHT 11T3..	411,00	**225**		
CHSC.25.R.04-11-B-40	25	4	10	25	98	40	45000	1,8	XDHT 11T3..			451,60	**425**
CHSC.25.R.02-11-A-50	25	2	10	25	165	50	31700	1,8	XDHT 11T3..	392,60	**125**		
CHSC.25.R.03-11-A-50	25	3	10	25	165	50	31700	1,8	XDHT 11T3..	411,00	**325**		

MaxiMill – HSC-11 Shell mill

▲ Insert radius >3.2 mm: Modify cutter body





Designation	DC mm	ZNF	APMX mm	DCONMS H6 mm	DHUB mm	OAL mm	RPMX 1/min.	torque moment Nm	Insert	50 718 ... EUR 2B/40	
AHSC.40.R.04-11	40	4	10	16	38	50	35500	1,8	XDHT 11T3..	570,90	**040**
AHSC.50.R.04-11	50	4	10	22	43	50	31800	1,8	XDHT 11T3..	690,60	**050**
AHSC.63.R.05-11	63	5	10	22	43	50	28300	1,8	XDHT 11T3..	768,90	**063**
AHSC.80.R.05-11	80	5	10	27	58	50	25100	1,8	XDHT 11T3..	800,00	**080**
AHSC.100.R.05-11	100	5	10	32	78	50	22400	1,8	XDHT 11T3..	857,30	**100**

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		80 397 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
DC	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7	
16 - 25	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**128**	165,90	**192**
32	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**131**	165,90	**192**
40	6,13	**043**	5,04	**040**	13,16	**125**	16,08	**151**	5,64	**303**	5,27	**131**	165,90	**192**
50 - 63	6,13	**043**	5,46	**050**	13,16	**125**	22,09	**154**	5,64	**303**	5,27	**131**	165,90	**192**
80 - 100	6,13	**043**			13,16	**125**			5,64	**303**	5,27	**131**	165,90	**192**

XDKT / XDHT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XD.T 11T302FR	6,8	2,8	10,6	2	3,80
XD.T 11T304FR	6,8	2,8	10,6	1,8	3,80
XD.T 11T308FR	6,8	2,8	10,6	1,4	3,80
XD.T 11T320FR	6,8	2,8	10,6	1,4	3,80
XD.T 11T325FR	6,8	2,8	10,6	1,4	3,80
XDHT 11T312FR	6,8	2,8	10,6	1,4	3,80
XDHT 11T316FR	6,8	2,8	10,6	1,4	3,80
XDHT 11T332FR	6,8	2,8	10,6	0,8	3,80
XDHT 11T340FR	6,8	2,8	10,6	-	3,80
XDHT 11T350FR	6,8	2,8	10,6	-	3,80



XDKT

XDKT / XDHT

		-F20 CTWN215		-27P H216T	
					
		F		F	
		XDKT		XDHT	
		50 478 ...		50 477 ...	
ISO	RE	EUR		EUR	
	mm	1A/90		1A/90	
11T302FR	0,2	18,48	502	24,35	502
11T304FR	0,4	18,48	504	24,35	504
11T308FR	0,8	18,48	508	24,35	508
11T312FR	1,2			24,35	512
11T316FR	1,6			24,35	516
11T320FR	2,0	18,48	520 1)	24,35	520 1)
11T325FR	2,5	18,48	525 1)	24,35	525 1)
11T332FR	3,2			24,35	532 1)
11T340FR	4,0			24,35	540 1)
11T350FR	5,0			24,35	550 1)
P					
M					
K			○		○
N			●		●
S					
H					
O			○		○

1) Insert radius >1.6 mm: Modify cutter body

Milling guide

Safety advice	→ 166	Cutting data standard values	→ 167
Machining strategy	→ 168+169	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – HSC-19 Screw-in cutter

▲ Insert radius >4.0 mm: Modify cutter body



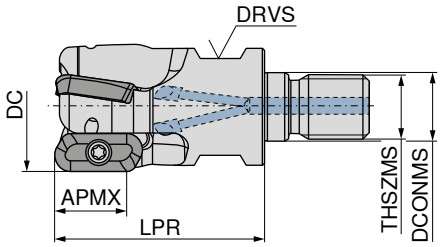

Designation	DC mm	ZNF	APMX mm	DCONMS mm	LPR mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	55 108 ... EUR 2B/40	
GHSC.25.R.02-19	25	2	18	12,5	45	M12	17	34400	5	XDHT 1904..	399,20	**025**
GHSC.32.R.03-19	32	3	18	17,0	52	M16	24	29100	5	XDHT 1904..	517,10	**032**
GHSC.40.R.03-19	40	3	18	17,0	52	M16	24	24900	5	XDHT 1904..	549,70	**040**

MaxiMill – HSC-19 End milling cutter

▲ Insert radius >4.0 mm: Modify cutter body



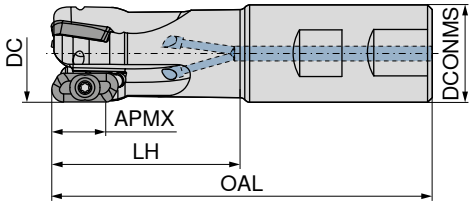

Designation	DC mm	ZNF	APMX mm	DCONMS $_{h5}$ mm	OAL mm	LH mm	RPMX 1/min.	torque moment Nm	Insert	50 679 ... EUR 2B/40		50 679 ... EUR 2B/40	
CHSC.25.R.02-19-A-50	25	2	18	25	121	50	32400	5	XDHT 1904..	399,20	**225**		
CHSC.25.R.02-19	25	2	18	25	121	65	32400	5	XDHT 1904..			411,00	**025**
CHSC.25.R.02-19-A-63	25	2	18	25	165	63	24700	5	XDHT 1904..	399,20	**325**		
CHSC.32.R.02-19-A-63	32	2	18	32	125	63	28900	5	XDHT 1904..	418,80	**232**		
CHSC.32.R.03-19-A-63	32	3	18	32	125	63	28900	5	XDHT 1904..	517,10	**432**		
CHSC.32.R.03-19	32	3	18	32	125	65	28900	5	XDHT 1904..			526,80	**033**
CHSC.32.R.02-19	32	2	18	32	125	65	28900	5	XDHT 1904..			428,60	**032**
CHSC.32.R.02-19-A-80	32	2	18	32	165	80	24400	5	XDHT 1904..	418,80	**332**		
CHSC.32.R.03-19-A-80	32	3	18	32	165	80	24400	5	XDHT 1904..	517,10	**532**		

MaxiMill – HSC-19 Shell mill

▲ Insert radius >4.0 mm: Modify cutter body







										50 716 ...	
Designation	DC mm	ZNF	APMX mm	DCONMS $_{H6}$ mm	DHUB mm	OAL mm	RPMX 1/min.	torque moment Nm	Insert	**EUR** 2B/40	
AHSC.40.R.03-19	40	3	18	16	38	50	24900	5	XDHT 1904..	535,00	**040**
AHSC.50.R.04-19	50	4	18	22	43	50	21600	5	XDHT 1904..	672,40	**050**
AHSC.63.R.04-19	63	4	18	22	48	50	18800	5	XDHT 1904..	752,70	**163**
AHSC.63.R.05-19	63	5	18	22	48	50	18800	5	XDHT 1904..	768,90	**063**
AHSC.80.R.04-19	80	4	18	27	58	50	16400	5	XDHT 1904..	782,00	**180**
AHSC.80.R.05-19	80	5	18	27	58	50	16400	5	XDHT 1904..	800,00	**080**
AHSC.100.R.04-19	100	4	18	32	78	50	14500	5	XDHT 1904..	839,40	**200**
AHSC.100.R.05-19	100	5	18	32	78	50	14500	5	XDHT 1904..	857,30	**100**
AHSC.125.R.05-19	125	5	18	40	88	63	12800	5	XDHT 1904..	991,30	**125**
AHSC.125.R.06-19	125	6	18	40	88	63	12800	5	XDHT 1904..	1.008,00	**225**

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		**80 397 ...**		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts **DC**	**EUR** Y7		**EUR** Y7		**EUR** Y7		**EUR** 2A/28		**EUR** 2A/28		**EUR** 2A/28		**EUR** Y7	
25	6,13	**036**			11,96	**113**			5,64	**303**	3,69	**172**	170,10	**193**
32	6,13	**036**			11,96	**113**			5,64	**303**	4,38	**173**	170,10	**193**
40	6,13	**036**	5,04	**040**	11,96	**113**	16,08	**151**	5,64	**303**	4,38	**173**	170,10	**193**
50 - 63	6,13	**036**	5,46	**050**	11,96	**113**	22,09	**154**	5,64	**303**	4,46	**174**	170,10	**193**
80 - 125	6,13	**036**			11,96	**113**			5,64	**303**	4,46	**174**	170,10	**193**

XDHT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDHT 190402..	9,52	4,65	19	2	4,76
XDHT 190404..	9,52	4,65	19	2	4,76
XDHT 190408..	9,52	4,65	19	2	4,76
XDHT 190412..	9,52	4,65	19	2	4,76
XDHT 190416..	9,52	4,65	19	2	4,76
XDHT 190420..	9,52	4,65	19	2	4,76
XDHT 190425..	9,52	4,65	19	1,4	4,76
XDHT 190432..	9,52	4,65	19	1	4,76
XDHT 190440..	9,52	4,65	19	1	4,76
XDHT 190450..	9,52	4,65	19	-	4,76



XDKT

XDHT

NEW

	-F10 CTPX715 DRAGONSKIN	-27P H216T
		
	F XDHT	F XDHT
	51 159 ...	50 487 ...

ISO	RE mm	EUR 1A/90		EUR 1A/90	
190402FR	0,2	41,38	00202	35,97	552
190404FR	0,4	41,38	00402	35,97	554
190408FR	0,8	41,38	00802	35,97	556
190412FR	1,2	41,38	01202	35,97	557
190416FR	1,6	41,38	01602	35,97	558
190420FR	2,0	41,38	02002	35,97	560
190425FR	2,5	41,38	02502	35,97	562
190432FR	3,2	41,38	03202	35,97	564
190440FR	4,0	41,38	04002	35,97	566
190450FR	5,0	41,38	05002[1)]	35,97	568 [1)]

P	○	
M	○	
K	●	○
N	●	●
S	○	
H		
O	○	○

1) Insert radius > 4.0 mm: Modify cutter body

Milling guide

Cutting data standard values	→ 145–148	Safety advice	→ 166
Machining strategy	→ 170–172	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

15

MaxiMill – HPC 12 Shell mill

▲ 50 723 ... normal pitch
▲ 50 724 ... fine pitch

Scope of supply:

Tool, adjustment wedges and setting key; incl. wooden box







Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	50 723 ... EUR 2B/40		50 724 ... EUR 2B/40	
AHPC.40.R.04-12	40	4	11	40	34	16	32000	5	ZNHW 1205..	825,80	**040**		
AHPC.50.R.04-12	50	4	11	40	49	22	32000	5	ZNHW 1205..	844,70	**050**		
AHPC.50.R.05-12	50	5	11	40	49	22	32000	5	ZNHW 1205..			945,80	**050**
AHPC.63.R.04-12	63	4	11	40	49	22	29000	5	ZNHW 1205..	870,10	**063**		
AHPC.63.R.07-12	63	7	11	40	49	22	29000	5	ZNHW 1205..			1.173,00	**063**
AHPC.80.R.05-12	80	5	11	50	60	27	26000	5	ZNHW 1205..	1.229,00	**080**		
AHPC.80.R.09-12	80	9	11	50	60	27	26000	5	ZNHW 1205..			1.632,00	**080**
AHPC.100.R.06-12	100	6	11	50	70	32	24000	5	ZNHW 1205..	1.388,00	**100**		
AHPC.100.R.12-12	100	12	11	50	70	32	24000	5	ZNHW 1205..			1.990,00	**100**
AHPC.125.R.08-12	125	8	11	63	72	40	22000	5	ZNHW 1205..	1.645,00	**125**		
AHPC.125.R.14-12	125	14	11	63	72	40	22000	5	ZNHW 1205..			2.249,00	**12514**
AHPC.160.R.10-12	160	10	11	63	118	40	18000	5	ZNHW 1205..	2.049,00	**16010**[1)]		
AHPC.160.R.16-12	160	16	11	63	118	40	18000	5	ZNHW 1205..			5.900,00	**16016**[1)]
AHPC.200.R.12-12	200	12	11	63	153	60	16000	5	ZNHW 1205..	6.111,00	**20000**[1)]		
AHPC.250.R.14-12	250	14	11	63	200	60	14000	5	ZNHW 1205..	6.902,00	**25014**[1)]		
AHPC.315.R.18-12	315	18	11	80	265	60	12000	5	ZNHW 1205..	8.693,00	**31518**[1)]		

1) Without Through Coolant

Spare parts	TORX® blade		Molykote		Clamping screw		Wedge		Torque screwdriver	
	80 950 ...		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**	
DC	EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR Y7	
40 - 315	6,13	**036**	5,64	**303**	4,46	**174**	47,44	**199**	170,10	**193**

ZNHW

Designation	LE	D1	IC	S
	mm	mm	mm	mm
ZNHW 120504ER-1503	3	4,85	10	5,40
ZNHW 120504FR-0007	7	4,85	10	5,40
ZNHW 120508ER-1503	3	4,85	10	5,40
ZNHW 120508SR-0003	3	4,85	10	5,40
ZNHW 1205EOER-1002	2	4,85	10	5,40
ZNHW 1205POER-1511	11	4,85	10	5,40
ZNHW 1205POFR-1003	3	4,85	10	5,40
ZNHW 1205POSR-1503	3	4,85	10	5,40
ZNHW 1205POSR-1506	6	4,85	10	5,40
ZNHW 1205POSR-3003	3	4,85	10	5,40
ZNHW 1205ZZSR-5003	3	4,85	10	5,40



ZNHW

	CTL3215	CTD4205	-R CTD4205	CTD4205	-Q CTD4205
					
	CBN ZNHW	**DIAMOND** ZNHW	**DIAMOND** ZNHW	**DIAMOND** ZNHW	**DIAMOND** ZNHW
	50 515 ...	**50 467 ...**	**50 517 ...**	**50 468 ...**	**50 466 ...**
ISO	**EUR** 1G/21	**EUR** 1G/22	**EUR** 1G/22	**EUR** 1G/22	**EUR** 1G/22
RE mm					
120504ER-1503 0,4				145,30 **906**	
120504FR-0007 0,4				177,00 **904**	
120508ER-1503 0,8				145,30 **910**	
120508SR-0003 0,8				144,60 **908**	
1205EOER-1002	167,60 **952**				
1205POER-1511		209,50 **902**			
1205POFR-1003		145,30 **90600**			
1205POSR-1503		131,50 **900**			
1205POSR-1506		170,50 **90800**	170,50 **90800**		
1205POSR-3003		144,60 **904**			
1205ZZSR-5003					185,00 **900** 1)
P					
M					
K	●				
N		●	●	●	●
S					
H	○				
O		○	○	○	○

1) -Q = trailing edge insert

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 173
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

MaxiMill – 242 Chamfer Cutter

▲ Caution: Use only inserts with a corner radius of less than 1.6 mm
▲ ZEFP = number of inserts
▲ ZNP = tooth rows







NEW

50 768 ...

KAPR	DC mm	DCX mm	ZNF	APMX mm	ZEFP	b ±0,3 mm	OAL mm	DCONMS mm	DHUB mm	ZNP	torque moment Nm	Insert	EUR 2B/40	
15°	35	89,60	3	7,0	6	27,6	50	27	62,5	2	3,2	LD.. 15...	476,10	**11503**
30°	35	83,60	3	13,6	6	27,6	50	27	62,5	2	3,2	LD.. 15...	476,10	**13003**
45°	35	74,60	3	19,3	6	27,6	50	27	62,5	2	3,2	LD.. 15...	476,10	**14503**
60°	35	62,70	3	23,6	6	27,6	50	22	49,0	2	3,2	LD.. 15...	476,10	**16003**
75°	35	49,48	3	26,7	6	27,6	60	22	49,0	2	3,2	LD.. 15...	476,10	**17503**[1)]

1) Version with Powerscrew

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver		clamping screw	
	80 950 ...		**80 397 ...**		**80 950 ...**		**70 950 ...**		**70 950 ...**		**70 950 ...**		**80 950 ...**		**83 950 ...**	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR		EUR	
KAPR	Y7		Y7		Y7		2A/28		2A/28		2A/28		Y7		Y8/3B	
15 - 60	6,13	**036**			11,96	**113**			5,64	**303**	4,06	**304**	165,90	**192**	4,73	**125**
75	6,13	**036**	5,46	**050**	11,96	**113**	22,09	**154**	5,64	**303**	4,06	**304**	165,90	**192**		

LDFT / LDFW / LDMT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
LD.. 1504PD..	9,52	4,4	15	1,2	4,76
LDFT 150408..	9,52	4,4	15	1,2	4,76
LDFT 1504PD..	9,52	4,4	15	0,8	4,76



L...

LDMT / LDFT / LDFW

		-29 CTCP230	-29 CTPP235	-33 CTPM240	CTCK215	NEW -F10 CTPX715	-27P H216T
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	
							
		LDMT	LDMT	LDFT	LDFW	LDFT	LDFT
		51 080 ...	51 080 ...	51 042 ...	51 043 ...	51 157 ...	50 409 ...
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1A/90		EUR 1A/90	
150408FR	0,8									29,44	00802	26,09	550
1504PDSR	0,8	12,84	020	12,84	120			20,99	520				
1504PDSR	1,2					24,00	420						
P		●		●		○				○			
M				○		●				○			
K		○		○				●		●		○	
N										●		●	
S										○			
H													
O										○		○	

Milling guide

Cutting data standard values	→ 145–148	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – HFC high-feed screw-in cutter





Designation	DC	DCX	ZNF	APMX	LPR	DCONMS	THSZMS	DRVS	RPMX	torque moment	Insert	50 682 ... EUR 2B/40	
	mm	mm		mm	mm	mm		mm	1/min.	Nm			
GHFC.16.R.02-06	7	16	2	0,8	27	8,5	M8	10	20800	1,2	XPLX 0603..	291,50	**616**
GHFC.20.R.03-06	11	20	3	0,8	33	10,5	M10	15	19800	1,2	XPLX 0603..	331,00	**620**
GHFC.25.R.04-06	16	25	4	0,8	35	12,5	M12	17	18700	1,2	XPLX 0603..	370,50	**625**
GHFC.32.R.05-06	23	32	5	0,8	35	17,0	M16	24	22000	1,2	XPLX 0603..	409,90	**632**
GHFC.42.R.07-06	33	42	7	0,8	35	17,0	M16	24	15000	1,2	XPLX 0603..	451,00	**04207**
GHFC.25.R.02-09	12	25	2	1,0	35	12,5	M12	17	30000	3,2	XDLX 09T3..	349,10	**025**
GHFC.25.R.03-09	12	25	3	1,0	35	12,5	M12	17	30000	3,2	XDLX 09T3..	374,70	**125**
GHFC.32.R.03-09	19	32	3	1,0	35	17,0	M16	24	27000	3,2	XDLX 09T3..	391,50	**032**
GHFC.42.R.05-09	19	42	5	1,0	35	17,0	M16	24	26100	3,2	XDLX 09T3..	438,50	**04205**
GHFC.32.R.02-12	15	32	2	2,0	35	17,0	M16	24	21600	5	XOLX 1204..	366,20	**132**
GHFC.35.R.03-12	18	35	3	2,0	35	17,0	M16	24	21360	5	XOLX 1204..	391,50	**035**
GHFC.42.R.04-12	25	42	4	2,0	35	17,0	M16	24	20800	5	XOLX 1204..	422,80	**04204**

MaxiMill – HFC high-feed end mill



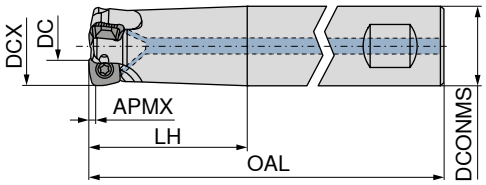

Designation	DC	DCX	ZNF	APMX	OAL	LH	DCONMS $_{h6}$	RPMX	torque moment	Insert	50 681 ... EUR 2B/40		50 681 ... EUR 2B/40	
	mm	mm		mm	mm	mm	mm	1/min.	Nm					
CHFC.16.R.02-06-B-40	7,0	16	2	0,8	89	40	16	17300	1,2	XPLX 0603..			291,50	**616**
CHFC.16.R.02-06-A-40-200	7,0	16	2	0,8	200	40	16	4600	1,2	XPLX 0603..	291,50	**716**		
CHFC.20.R.03-06-B-50	11,0	20	3	0,8	101	50	20	14500	1,2	XPLX 0603..			331,00	**620**
CHFC.20.R.03-06-A-50-225	11,0	20	3	0,8	225	50	20	4200	1,2	XPLX 0603..	331,00	**720**		
CHFC.25.R.04-06-B-50	16,0	25	4	0,8	107	50	25	15600	1,2	XPLX 0603..			370,50	**625**
CHFC.25.R.04-06-A-50-225	16,0	25	4	0,8	225	50	25	4600	1,2	XPLX 0603..	370,50	**725**		
CHFC.32.R.05-06-B-25-60	23,0	32	5	0,8	117	60	25	11000	1,2	XPLX 0603..			409,90	**632**
CHFC.32.R.05-06-A-25-60-225	23,0	32	5	0,8	225	60	25	3900	1,2	XPLX 0603..	409,90	**732**		
CHFC.25.R.02-09-A-50-225	12,3	25	2	1,0	225	50	25	9000	3,2	XDLX 09T3..	349,10	**025**		
CHFC.25.R.03-09-A-50-225	12,3	25	3	1,0	225	50	25	9000	3,2	XDLX 09T3..	374,70	**125**		
CHFC.32.R.03-09-A-63-250	19,3	32	3	1,0	250	63	32	8100	3,2	XDLX 09T3..	391,50	**032**		
CHFC.32.R.02-12-A-63-250	14,8	32	2	2,0	250	63	32	6480	5	XOLX 1204..	366,20	**132**		
CHFC.35.R.03-12-A-63-250	17,8	35	3	2,0	250	63	32	6480	5	XOLX 1204..	391,50	**035**		

MaxiMill – HFC high-feed face mill







Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS $_{H6}$ mm	DHUB mm	RPMX 1/min.	torque moment Nm	Insert	50 683 ... EUR 2B/40	
AHFC.32.R.03-09	19,3	32	3	1,0	40	16	38	27700	3,2	XDLX 09T3..	391,50	**032**
AHFC.35.R.04-09	19,3	35	4	1,0	40	16	38	26700	3,2	XDLX 09T3..	417,00	**035**
AHFC.40.R.04-09	27,3	40	4	1,0	40	16	38	26400	3,2	XDLX 09T3..	434,10	**140**
AHFC.42.R.05-09	29,3	42	5	1,0	40	16	38	26100	3,2	XDLX 09T3..	459,50	**142**
AHFC.50.R.05-09	37,3	50	5	1,0	40	22	43	23500	3,2	XDLX 09T3..	510,70	**150**
AHFC.52.R.06-09	39,3	52	6	1,0	40	22	43	23000	3,2	XDLX 09T3..	536,20	**152**
AHFC.63.R.06-09	50,3	63	6	1,0	40	22	48	20500	3,2	XDLX 09T3..	587,20	**163**
AHFC.66.R.07-09	53,3	66	7	1,0	40	22	48	20000	3,2	XDLX 09T3..	612,70	**16600**
AHFC.40.R.03-12	22,8	40	3	2,0	40	16	38	21120	5	XOLX 1204..	408,60	**040**
AHFC.42.R.04-12	24,8	42	4	2,0	40	16	38	20880	5	XOLX 1204..	434,10	**042**
AHFC.50.R.04-12	32,8	50	4	2,0	40	22	43	18800	5	XOLX 1204..	485,00	**050**
AHFC.52.R.05-12	34,8	52	5	2,0	40	22	43	18400	5	XOLX 1204..	510,70	**052**
AHFC.63.R.05-12	45,8	63	5	2,0	40	22	48	16400	5	XOLX 1204..	561,50	**063**
AHFC.66.R.06-12	48,8	66	6	2,0	40	22	48	16000	5	XOLX 1204..	587,20	**066**
AHFC.80.R.07-12	62,8	80	7	2,0	50	27	58	14000	5	XOLX 1204..	663,90	**080**
AHFC.100.R.08-12	82,8	100	8	2,0	50	32	78	12000	5	XOLX 1204..	740,70	**100**
AHFC.63.R.05-19	36,7	63	5	3,3	40	22	48	5500	5	XOLX 1906..	588,00	**263**
AHFC.80.R.06-19	53,7	80	6	3,3	50	27	58	4700	5	XOLX 1906..	714,50	**280**
AHFC.100.R.08-19	73,7	100	8	3,3	52	32	78	4100	5	XOLX 1906..	850,40	**300**
AHFC.125.R.10-19	98,7	125	10	3,3	63	40	88	3600	5	XOLX 1906..	1.068,00	**325**
AHFC.160.R.11-19	133,7	160	11	3,3	63	40	98	3100	5	XOLX 1906..	1.292,00	**360** [1]

1) With threaded holes M12 on the front face, pitch circle diameter = 66.7 mm / Without Through Coolant

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		80 397 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts Insert	EUR Y7		EUR Y7		EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR Y7	
XDLX 09T3..	6,13	**036**			11,96	**113**			5,64	**303**	4,14	**110**	165,90	**192**
XDLX 09T3.. (Ø32 – Ø42)	6,13	**036**	5,04	**040**	11,96	**113**	16,08	**151**	5,64	**303**	4,06	**304**	165,90	**192**
XOLX 1204..	6,13	**037**			12,83	**114**			5,64	**303**	3,19	**01200**	170,10	**193**
XOLX 1204.. (Ø40 – Ø42)	6,13	**037**	5,04	**040**	12,83	**114**	16,08	**151**	5,64	**303**	3,19	**01200**	170,10	**193**
XOLX 1906..	6,13	**037**			12,83	**114**			5,64	**303**	5,27	**302**	170,10	**193**
XPLX 0603..	6,13	**033**			10,05	**110**			5,64	**303**	3,32	**116**	165,90	**192**

XPLX / XDLX / XOLX / XOHX

Designation	IC	D1	L	BS	S	AN
	mm	mm	mm	mm	mm	°
XPLX 0603..	6,35	2,8	6	1	2,75	11
XDLX 09T3..	9,52	4,4	9	1,9	3,97	15
XO.X 1204..	12,70	5,5	12	1,3	4,76	10
XOLX 1906..	19,14	6,0	19	-	6,35	10



XPLX

		-M50 CTCP220	-M50 CTPP225	-M50 CTPP235	-M50 CTPM225	-M50 CTPM240	-F40 CTPM245	-F40 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		XPLX	XPLX	XPLX	XPLX	XPLX	XPLX	XPLX
		51 019 ...	51 019 ...	51 019 ...	51 019 ...	51 019 ...	51 116 ...	51 116 ...
ISO	RE	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
	mm							
060305ER	0,5						19,78 **455**	19,78 **90501**
060305SR	0,5	16,22 **255**	16,22 **055**	16,22 **105**	16,22 **205**	16,22 **405**		
P		●	●	●	●	○	●	●
M				○	●	●	●	●
K				○				
N								
S								○
H								
O								

XPLX

		-M50 CTCK215	-F40 CTC5240	-F40 CTCS245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		XPLX	XPLX	XPLX
		51 019 ...	50 518 ...	51 116 ...
ISO	RE	EUR 1B/61	EUR 1H/17	EUR 1H/17
	mm			
060305ER	0,5		19,78 **558**	19,78 **55500**
060305SR	0,5	16,22 **505**		
P				
M				
K		●		
N				
S			●	●
H				
O				

XDLX

		-M50 CTCP220 DRAGONSKIN		-M50 CTPP225 DRAGONSKIN		-M50 CTCP230 DRAGONSKIN		-M50 CTPP235 DRAGONSKIN	
		XDLX		XDLX		XDLX		XDLX	
		51 016 ...		51 016 ...		51 016 ...		51 016 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
09T308SR	0,8	16,73	258	16,73	058	16,73	008	16,73	108
P			●		●		●		●
M									○
K							○		○
N									
S									
H									
O									

XDLX

		-M50 CTPM225 DRAGONSKIN		-M50 CTCM235 DRAGONSKIN		-M50 CTPM240 DRAGONSKIN		-F40 CTPM245 DRAGONSKIN		-M50 CTPM245 DRAGONSKIN		-M50 CTCM245 DRAGONSKIN	
		XDLX		XDLX		XDLX		XDLX		XDLX		XDLX	
		51 016 ...		51 016 ...		51 016 ...		51 115 ...		51 016 ...		51 016 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1H/17		EUR 1H/17		EUR 1H/17	
09T308ER	0,8							20,19	458				
09T308SR	0,8	16,73	208	16,73	308	16,73	408			20,19	458	20,19	90801
P		●		●		○		●		●		●	
M		●		●		●		●		●		●	
K													
N													
S												○	
H													
O													

15

XDLX

		-M50 CTCK215		-F40 CTC5240		-F40 CTCS245	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
		XDLX		XDLX		XDLX	
		51 016 ...		50 503 ...		51 115 ...	
ISO	RE mm	EUR 1B/61		EUR 1H/17		EUR 1H/17	
09T308ER	0,8			20,19	558	20,19	558
09T308SR	0,8	16,73	508				
P							
M							
K		●					
N							
S				●		●	
H							
O							

XOLX

		-M50 CTCP220		-M50 CTPP225		-M50 CTCP230		-M50 CTPP235		-R50 CTPP235	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
		XOLX		XOLX		XOLX		XOLX		XOLX	
		51 017 ...		51 017 ...		51 017 ...		51 017 ...		51 018 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
120410SR	1,0	20,04	260	20,04	060	20,04	010	20,04	110	20,04	110
P		●		●		●		●		●	
M								○		○	
K						○		○		○	
N											
S											
H											
O											

XOLX

		-M50 CTPM225	-M50 CTCM235	-M50 CTPM240	-F40 CTPM245	-M50 CTPM245	-F40 CTCM245	-M50 CTCM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		XOLX	XOLX	XOLX	XOLX	XOLX	XOLX	XOLX
		51 017 ...	51 017 ...	51 017 ...	51 022 ...	51 017 ...	51 022 ...	51 017 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1H/17	EUR 1H/17
120410ER	1,0				23,61 460		23,61 91001	
120410SR	1,0	20,04 210	20,04 310	20,04 410		23,61 460		23,61 91001
P		●	●	○	●	●	●	●
M		●	●	●	●	●	●	●
K								
N								
S							○	○
H								
O								

XOLX / XOHX

		-M50 CTCK215	-F40 CTC5240	-F50 CTC5240	-F40 CTCS245	-F50 CTCS245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		XOLX	XOLX	XOHX	XOLX	XOHX
		51 017 ...	50 504 ...	51 124 ...	51 022 ...	51 124 ...
ISO	RE mm	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1H/17	EUR 1H/17
120410ER	1,0		23,61 558		23,61 560	
120410SR	1,0	20,04 510		30,69 16000		30,69 56000
P						
M						
K		●				
N						
S			●	●	●	●
H						
O						

15

XOLX

		-M50 CTCP230		-M50 CTPP235		-M50 CTPM240		-F40 CTPM245	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
		XOLX		XOLX		XOLX		XOLX	
		51 017 ...		51 017 ...		51 017 ...		51 022 ...	
ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1H/17	
190615ER	1,5							35,82	465
190615SR	1,5	29,14	015	29,14	115	29,14	415		
P		●		●		○		●	
M				○		●		●	
K		○		○					
N									
S									
H									
O									

XOLX

		-F40 CTCM245		-M50 CTCK215		-M50 CTPK220		-F40 CTC5240		-F40 CTCS245	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
											
		XOLX		XOLX		XOLX		XOLX		XOLX	
		51 022 ...		51 017 ...		51 017 ...		50 504 ...		51 022 ...	
ISO	RE mm	EUR 1H/17		EUR 1B/61		EUR 1B/61		EUR 1H/17		EUR 1H/17	
190615ER	1,5	35,82	91501					35,82	515	35,82	56500
190615SR	1,5			29,14	515	29,14	61500				
P		●									
M		●									
K				●		●					
N											
S		○						●		●	
H											
O											

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 176–179
Starting Parameter	→ 176–179	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

MaxiMill – DHFC high-feed screw-in cutter



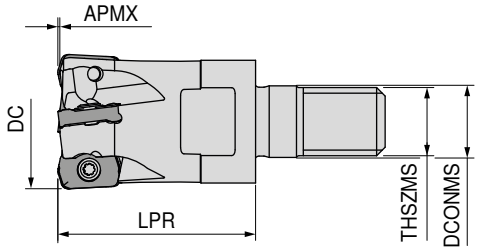

Designation	DC mm	ZNF	APMX mm	LPR mm	DCONMS mm	THSZMS	torque moment Nm	Insert	56 411 ... EUR WA	
GDHFC.16.R.02-09	16	2	0,75	29	8,5	M8	0,65	LNKX 0925..	269,40	01602
GDHFC.16.R.03-09	16	3	0,75	29	8,5	M8	0,65	LNKX 0925..	293,80	01603
GDHFC.20.R.04-09	20	4	0,75	29	10,5	M10	0,65	LNKX 0925..	337,10	02004
GDHFC.25.R.05-09	25	5	0,75	33	12,5	M12	0,65	LNKX 0925..	391,20	02505
GDHFC.32.R.05-09	32	5	0,75	42	17,0	M16	0,65	LNKX 0925..	418,20	03205
GDHFC.35.R.06-09	35	6	0,75	42	17,0	M16	0,65	LNKX 0925..	442,70	03506
GDHFC.42.R.06-09	42	6	0,75	42	17,0	M16	0,65	LNKX 0925..	461,70	04206

MaxiMill – DHFC high-feed end mill



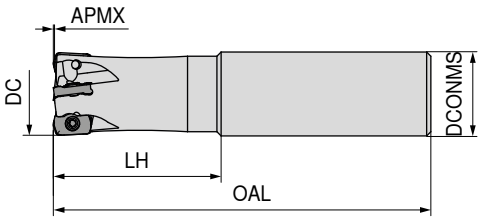

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS $_{h6}$ mm	torque moment Nm	Insert	56 417 ... EUR WA	
CDHFC.16.R.05-09-A-32	16	3	0,75	80	32	16	0,65	LNKX 0925..	293,80	01603
CDHFC.20.R.04-09-A-40	20	4	0,75	90	40	20	0,65	LNKX 0925..	337,10	02004

TORX® blade

80 950 ... EUR Y7


Key D

80 950 ... EUR Y7

Molykote

70 950 ... EUR 2A/28

Clamping screw

56 950 ... EUR WA

Torque screwdriver

80 950 ... EUR Y7

Spare parts DC	TORX® blade EUR Y7		Key D EUR Y7		Molykote EUR 2A/28		Clamping screw EUR WA		Torque screwdriver EUR Y7	
16 - 42	6,78	051	10,26	117	5,64	303	4,19	15000	153,30	191

15

LNKX

Designation	L mm	S mm
LNKX 0925..	9	2,50



LNKX

		-R50 CTPP231	-M50 CTPP236	-R50 CTPP236	-M50 CTPM241	-R50 CTPK221
		LNKX	LNKX	LNKX	LNKX	LNKX
		56 353 ...	56 355 ...	56 353 ...	56 355 ...	56 353 ...
ISO	RE mm	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB
0925ZSR	1	23,23 12000	23,23 02500	23,23 02000	23,23 42500	23,23 27000
P		●	●	●	○	○
M		○	○	○	●	
K		○	○	○		●
N						
S					○	
H						
O						

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 180
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

MaxiMill – 251 RS Screw in cutter



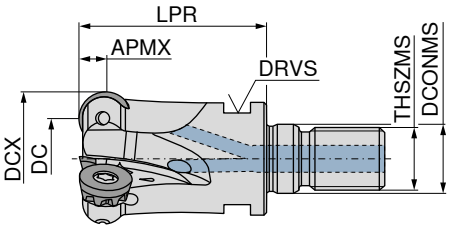



Designation	DC mm	DCX mm	ZNF	APMX mm	DCONMS mm	LPR mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	50 684 ... EUR 2B/40	
G251.20.R.05-05-RS	15	20	5	2,5	10,5	33	M10	15	31800	0,7	RDHX 0501..	352,70	**220**
G251.25.R.06-05-RS	20	25	6	2,5	12,5	35	M12	17	24450	0,7	RDHX 0501..	405,90	**225**
G251.32.R.07-05-RS	27	32	7	2,5	17,0	35	M16	24	19850	0,7	RDHX 0501..	487,10	**232**
G251.20.R.03-08-RS	12	20	3	4,0	10,5	33	M10	15	25000	1,2	RDHX 0802..	331,00	**120**
G251.25.R.04-08-RS	17	25	4	4,0	12,5	35	M12	17	19000	1,2	RDHX 0802..	370,50	**125**
G251.32.R.05-08-35-RS	24	32	5	4,0	17,0	35	M16	24	19000	1,2	RDHX 0802..	450,40	**132**
G251.20.R.02-10-RS	10	20	2	5,0	10,5	33	M10	15	30000	2	RP.X 10T3..	267,80	**020**
G251.25.R.03-10-RS	15	25	3	5,0	12,5	35	M12	17	30000	2	RP.X 10T3..	359,90	**025**
G251.32.R.04-10-RS	22	32	4	5,0	17,0	35	M16	24	25000	2	RP.X 10T3..	418,80	**032**
G251.25.R.02-12-35-RS	13	25	2	6,0	12,5	35	M12	17	25000	3,2	RP.X 1204..	259,70	**525**
G251.32.R.03-12-35-RS	20	32	3	6,0	17,0	35	M16	24	19850	3,2	RP.X 1204..	316,80	**532**
G251.35.R.03-12-35-RS	23	35	3	6,0	17,0	35	M16	24	15900	3,2	RP.X 1204..	316,80	**535**
G251.42.R.04-12-42-RS	30	42	4	6,0	17,0	42	M16	24	15000	3,2	RP.X 1204..	376,50	**542**

	TORX® blade		Key D		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		80 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts Insert	EUR Y7		EUR Y7		EUR 2A/28		EUR 2A/28		EUR Y7	
RDHX 0501..	6,13	**031**	10,87	**108**	5,64	**303**	3,32	**149**	153,30	**191**
RDHX 0802..	6,13	**033**	10,05	**110**	5,64	**303**	3,32	**116**	153,30	**191**
RP.X 10T3..	6,13	**035**	11,78	**112**	5,64	**303**	3,32	**840**	165,90	**192**
RP.X 1204..	6,13	**036**	11,96	**113**	5,64	**303**	4,06	**304**	165,90	**192**

MaxiMill – 251 RS End milling cutter



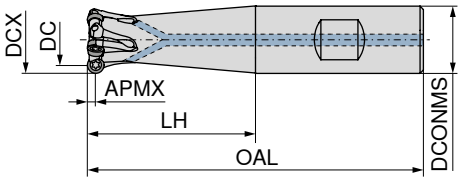

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS mm	RPMX 1/min.	Insert	50 685 ... EUR 2B/40		50 685 ... EUR 2B/40	
C251.12.R-03-05-B-16-25-RS	7	12	3	2,5	75	25	16	40000	RDHX 0501..			307,60	**012**
C251.12.R-03-05-A-32-165-RS	7	12	3	2,5	165	32	12	16000	RDHX 0501..	296,20	**112**		
C251.16.R-04-05-B-32-RS	11	16	4	2,5	81	32	16	40000	RDHX 0501..			359,90	**316**
C251.16.R-04-05-A-40-165-RS	11	16	4	2,5	165	40	16	18000	RDHX 0501..	351,70	**016**		
C251.20.R-05-05-B-40-RS	15	20	5	2,5	91	40	20	31800	RDHX 0501..			418,80	**620**
C251.20.R-05-05-A-50-165-RS	15	20	5	2,5	165	50	20	18000	RDHX 0501..	411,00	**120**		
C251.16.R-02-08-B-32-RS	8	16	2	4,0	81	32	16	40000	RDHX 0802..			253,70	**116**
C251.16.R-02-08-A-40-165-RS	8	16	2	4,0	165	40	16	18000	RDHX 0802..	243,90	**216**		
C251.20.R-03-08-B-40-RS	12	20	3	4,0	91	40	20	31800	RDHX 0802..			322,40	**220**
C251.20.R-03-08-A-60-RS	12	20	3	4,0	110	50	20	30000	RDHX 0802..	331,00	**020**		
C251.20.R-03-08-A-50-200-RS	12	20	3	4,0	200	50	20	25000	RDHX 0802..	312,50	**320**		
C251.25.R-04-08-B-50-RS	17	25	4	4,0	107	50	25	25500	RDHX 0802..			381,10	**625**
C251.25.R-04-08-A-60-RS	17	25	4	4,0	116	60	25	19000	RDHX 0802..	370,50	**125**		
C251.25.R-04-08-A-60-225-RS	17	25	4	4,0	225	60	25	18000	RDHX 0802..	371,30	**225**		
C251.20.R-02-10-A-50-RS	10	20	2	5,0	102	50	20	25000	RP.X 10T3..	270,00	**420**		
C251.20.R-02-10-A-50-200-RS	10	20	2	5,0	200	50	20	25000	RP.X 10T3..	270,00	**520**		
C251.25.R.03-10-A-60-RS	15	25	3	5,0	116	60	25	25000	RP.X 10T3..	364,90	**025**		
C251.25.R-03-10-B-60-RS	15	25	3	5,0	116	60	25	20000	RP.X 10T3..			364,90	**325**
C251.25.R-03-10-A-60-225-RS	15	25	3	5,0	225	60	25	18000	RP.X 10T3..	364,90	**425**		
C251.32.R.04-10-A-70-RS	22	32	4	5,0	130	70	32	25000	RP.X 10T3..	411,00	**032**		
C251.25.R-02-12-B-30-RS	13	25	2	6,0	86	30	25	25000	RP.X 1204..			332,80	**525**
C251.32.R-03-12-A-RS	20	32	3	6,0	100	40	32	19000	RP.X 1204..	384,80	**232**		
C251.32.R-03-12-B-40-RS	20	32	3	6,0	100	40	32	19000	RP.X 1204..			384,80	**132**

TORX® blade

Key D

Molykote

Clamping screw

Torque screwdriver

Spare parts Insert	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7	
RDHX 0501..	6,13	**031**	10,87	**108**	5,64	**303**	3,32	**149**	153,30	**191**
RDHX 0802..	6,13	**033**	10,05	**110**	5,64	**303**	3,32	**116**	153,30	**191**
RP.X 10T3..	6,13	**035**	11,78	**112**	5,64	**303**	3,32	**840**	165,90	**192**
RP.X 10T3..			11,78	**112**	5,64	**303**	3,32	**840**		
RP.X 1204..	6,13	**036**	11,96	**113**	5,64	**303**	4,06	**304**	165,90	**192**

MaxiMill – 251 RS Shell mill







Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS H6 mm	RPMX 1/min.	torque moment Nm	Insert	50 686 ... EUR 2B/40	
A251.40.R.03-10-RS	30	40	3	5	40	38	16	15900	2	RP.X 10T3..	399,20	**240**
A251.40.R.05-10-RS	30	40	5	5	40	38	16	16000	2	RP.X 10T3..	449,90	**140**
A251.42.R.06-10-RS	32	42	6	5	40	38	16	16000	2	RP.X 10T3..	517,10	**142**
A251.50.R.04-10-RS	40	50	4	5	40	43	22	12700	2	RP.X 10T3..	438,40	**350**
A251.50.R.06-10-RS	40	50	6	5	40	43	22	12500	2	RP.X 10T3..	535,00	**150**
A251.52.R.06-10-RS	42	52	6	5	40	43	22	12500	2	RP.X 10T3..	535,00	**152**
A251.40.R.04-12-RS	28	40	4	6	40	38	16	15900	3,2	RP.X 1204..	413,80	**340**
A251.50.R.04-12-RS	38	50	4	6	40	43	22	12700	3,2	RP.X 1204..	427,10	**250**
A251.50.R.05-12-RS	38	50	5	6	40	43	22	12500	3,2	RP.X 1204..	502,20	**050**
A251.52.R.05-12-RS	40	52	5	6	40	43	22	12500	3,2	RP.X 1204..	526,80	**052**
A251.63.R.06-12-RS	51	63	6	6	40	48	22	10000	3,2	RP.X 1204..	620,10	**063**
A251.66.R.07-12-RS	54	66	7	6	40	48	22	9000	3,2	RP.X 1204..	653,70	**166**
A251.80.R.05-12-RS	68	80	5	6	50	58	27	7950	3,2	RP.X 1204..	565,90	**180**
A251.80.R.07-12-RS	68	80	7	6	50	58	27	8000	3,2	RP.X 1204..	699,50	**080**
A251.100.R.06-12-RS	88	100	6	6	50	78	32	6350	3,2	RP.X 1204..	631,60	**100**
A251.100.R.10-12-RS	88	100	10	6	50	78	32	6350	3,2	RP.X 1204..	922,80	**200**
A251.50.R.04-16-RS	34	50	4	8	40	48	22	12700	5	RP.X 1605..	502,20	**450**
A251.52.R.04-16-RS	36	52	4	8	40	48	22	10100	5	RP.X 1605..	502,20	**452**
A251.63.R.05-16-RS	47	63	5	8	40	48	22	10100	5	RP.X 1605..	633,10	**163**
A251.66.R.05-16-RS	50	66	5	8	40	48	22	7950	5	RP.X 1605..	637,80	**466**
A251.80.R.06-16-RS	64	80	6	8	50	58	27	7950	5	RP.X 1605..	768,90	**280**
A251.100.R.07-16-RS	84	100	7	8	50	78	32	6350	5	RP.X 1605..	898,30	**300**
A251.125.R.08-16-RS	109	125	8	8	63	88	40	5050	5	RP.X 1605..	950,90	**225**
A251.80.R.05-20-RS	60	80	5	10	50	58	27	7950	5	RP.X 2006..	651,00	**380**
A251.100.R.06-20-RS	80	100	6	10	50	78	32	6350	5	RP.X 2006..	778,80	**400**
A251.125.R.06-20-RS	105	125	6	10	63	88	40	5050	5	RP.X 2006..	788,60	**125**

TORX® blade

Clamping key – T

Key D

Power Screw

Molykote

Clamping screw

Torque screwdriver

Spare parts Insert	80 950 ... EUR Y7		80 397 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7	
RP.X 10T3..	6,13	**035**	5,04	**040**	11,78	**112**	16,08	**151**	5,64	**303**	3,32	**840**	165,90	**192**
RP.X 1204..	6,13	**036**	5,04	**040**	11,96	**113**	16,08	**151**	5,64	**303**	4,06	**304**	165,90	**192**
RP.X 1605..	6,13	**037**	5,46	**050**	12,83	**114**	22,09	**154**	5,64	**303**	3,19	**01200**	170,10	**193**
RP.X 2006..	6,13	**037**			12,83	**114**			5,64	**303**	5,27	**302**	170,10	**193**

15

RDHX / RPHX / RPNX

Designation	IC mm	D1 mm	S mm
RDHX 0501..	5	2,5	1,59
RDHX 0802..	8	2,8	2,38
RP.X 10T3..	10	3,4	3,97
RP.X 1204..	12	4,4	4,76
RP.X 1605..	16	5,5	5,56
RP.X 2006..	20	6,0	6,35



RP.X 10T3.. / RP.X 1204.. / RP.X 1605.. / RPNX 2006..



RDHX 0501.. / RDHX0802..

RDHX

	-SN CTCP230 DRAGONSKIN	-SN CTPP235 DRAGONSKIN	-F50 CTPM240 DRAGONSKIN	-F50 CTPM245 DRAGONSKIN	-F50 CTCM245 DRAGONSKIN
	RDHX	RDHX	RDHX	RDHX	RDHX
	51 048 ...	51 048 ...	51 083 ...	51 083 ...	51 083 ...
ISO	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
0501M0SN	15,93 020	15,93 120		14,62 465	
0802M0SN	16,24 025	16,24 125	16,24 420	19,25 470	19,25 92001
0802M4SN				19,25 471	19,25 92101
P	●	●	○	●	●
M		○	●	●	●
K	○	○			
N					
S					○
H					
O					

RDHX

	-FN H216T	-M31 CTC5240 DRAGONSKIN	-F50 CTCS245 DRAGONSKIN
			
	RDHX	RDHX	RDHX
	50 481 ...	50 481 ...	51 083 ...
ISO	EUR 1B/61	EUR 1H/17	EUR 1H/17
0501M0FN	12,62 600		
0802M0EN		19,25 500	
0802M0FN	13,03 602		
0802M0SN			19,25 570
0802M4EN		19,25 50100	
P			
M			
K	○		
N	●		
S		●	●
H			
O	○		

RPHX / RPNX

	-SN TCM10	-F50 CTCP230 DRAGONSKIN	-M50 CTCP230 DRAGONSKIN	-SN CTCP230 DRAGONSKIN	-SN CTCP230 DRAGONSKIN
	CERMET RPHX	RPNX	RPNX	RPHX	RPNX
	50 483 ...	51 055 ...	51 054 ...	51 052 ...	51 057 ...
ISO	EUR 1B/79	EUR 1B/18	EUR 1B/61	EUR 1B/61	EUR 1B/61
10T3M0SN	16,85 900				
10T3M8SN		16,85 020	12,84 020	16,85 020	
1204M0SN	18,48 902				
1204M8SN		14,74 025	14,74 025	18,48 025	14,74 025
1605M8SN			20,04 030	25,15 030	20,04 030
2006M8SN					26,09 035
P	●	●	●	●	●
M					
K	○	○	○	○	○
N					
S					
H					
O					

RPHX / RPNX

	-F50 CTPP235 DRAGONSKIN	-F50 CTPP235 DRAGONSKIN	-M30 CTPP235 DRAGONSKIN	-M30 CTPP235 DRAGONSKIN
				
	RPHX	RPNX	RPHX	RPNX
	51 051 ...	51 055 ...	51 049 ...	51 053 ...
ISO	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
10T3M8EN			16,85 120	
10T3M8SN	16,85 12000	12,84 120		
1204M8SN	18,48 125	14,74 125		
1605M0SN		20,04 130		
2006M8EN				26,09 120
P	●	●	●	●
M	○	○	○	○
K	○	○	○	○
N				
S				
H				
O				

15

RPNX / RPHX

	-M50 CTPP235 DRAGONSKIN		-M50 CTPP235 DRAGONSKIN		-SN CTPP235 DRAGONSKIN		-SN CTPP235 DRAGONSKIN	
	RPNX		RPHX		RPHX		RPNX	
	51 054 ...		51 050 ...		51 052 ...		51 057 ...	
ISO	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/18	
10T3M8SN	12,84	12000	16,85	12000	16,85	120		
1204M8SN	14,74	125			18,48	125	14,74	125
1605M8SN	20,04	130			25,15	130	20,04	130
2006M8SN							26,09	135
P	●		●		●		●	
M	○		○		○		○	
K	○		○		○		○	
N								
S								
H								
O								

RPHX

	-F50 CTPM225 DRAGONSKIN		-M30 CTPM225 DRAGONSKIN		-SN CTPM225 DRAGONSKIN		-F50 CTCM235 DRAGONSKIN		-M30 CTCM235 DRAGONSKIN	
	RPHX		RPHX		RPHX		RPHX		RPHX	
	51 051 ...		51 049 ...		51 052 ...		51 051 ...		51 049 ...	
ISO	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
1204M8EN			18,48	225					18,48	325
1204M8SN	18,48	225			18,48	225	18,48	325		
P	●		●		●		●		●	
M	●		●		●		●		●	
K										
N										
S										
H										
O										

RPHX / RPNX

	-F50 CTPM240 DRAGONSKIN		-F50 CTPM240 DRAGONSKIN		-M30 CTPM240 DRAGONSKIN		-M30 CTPM240 DRAGONSKIN		-M50 CTPM240 DRAGONSKIN	
	RPHX		 RPNX		RPHX		 RPNX		RPHX	
	51 051 ...		51 055 ...		51 049 ...		51 053 ...		51 050 ...	
ISO	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
10T3M8EN					16,85	420				
10T3M8SN	16,85	420							16,85	420
1204M8EN					18,48	425				
1204M8SN	18,48	425							18,48	425
1605M8EN					25,15	430				
1605M8SN	25,15	430								
2006M8EN							26,09	420		
2006M8SN			26,09	435						
P	○		○		○		○		○	
M	●		●		●		●		●	
K										
N										
S										
H										
O										

RPHX / RPNX

	CTPM245 DRAGONSKIN		-F50 CTPM245 DRAGONSKIN		-F50 CTPM245 DRAGONSKIN		-M32 CTPM245 DRAGONSKIN		-M50 CTPM245 DRAGONSKIN	
	RPHX		RPHX		 RPNX		RPHX		RPHX	
	51 052 ...		51 051 ...		51 055 ...		51 108 ...		51 050 ...	
ISO	EUR 1H/17		EUR 1H/17		EUR 1H/17		EUR 1H/17		EUR 1H/17	
10T3M4SN			21,28	470 [1]	17,68	470 [1]			21,28	470 [1]
10T3M8SN			21,28	471	17,68	471			21,28	471
1204M4EN	23,45	475 [1]					23,45	475 [1]		
1204M4SN			23,45	475 [1]	20,81	475 [1]			23,45	475 [1]
1204M6SN			23,45	476					23,45	476
1204M8SN			23,45	477	20,81	476			23,45	477
1605M8SN			31,99	480						
2006M4SN			40,51	485 [1]						
2006M8SN					31,99	485				
P	●		●		●		●		●	
M	●		●		●		●		●	
K										
N										
S										
H										
O										

1) Insert with 4 indexes

15

RPNX / RPHX

	-F50 CTCM245 DRAGONSKIN		-M50 CTCM245 DRAGONSKIN		-F50 CTCM245 DRAGONSKIN		-M50 CTCM245 DRAGONSKIN	
								
	RPNX		RPNX		RPHX		RPHX	
	51 055 ...		51 054 ...		51 051 ...		51 050 ...	
ISO	EUR 1H/17		EUR 1H/17		EUR 1H/17		EUR 1H/17	
10T3M4SN	17,68	92001[1)]			21,28	92001[1)]	21,28	92001[1)]
10T3M8SN	17,68	92101			21,28	92101		
1204M4SN	20,81	92501[1)]			23,45	92501[1)]	23,45	92501[1)]
1204M6SN			20,81	92601	23,45	92601	23,45	92601
1204M8SN	20,81	92601					23,45	92701
1605M8SN	23,45	93001			31,99	93001		
2006M8SN	31,99	93501	31,99	93501				
P	●		●		●		●	
M	●		●		●		●	
K								
N								
S	○		○		○		○	
H								
O								

1) Insert with 4 indexes

RPHX / RPNX

					NEW			
	-SN CTCK215 DRAGONSKIN		-SN CTCK215 DRAGONSKIN		-SN CTPK220 DRAGONSKIN		-F10 CTPX715 DRAGONSKIN	-27P H216T
	RPHX		RPNX		RPNX		RPHX	RPHX
	51 052 ...		51 057 ...		51 057 ...		51 156 ...	50 483 ...
ISO	EUR 1B/61		EUR 1B/18		EUR 1B/61		EUR 1A/90	EUR 1A/90
10T3M8FN							22,82 02002	19,26 600
10T3M8SN	16,85	520			12,84	620		
1204M8FN							25,31 02502	21,34 602
1204M8SN	18,48	525	14,74	525	14,74	625		
1605M8FN							34,53 03002	29,13 604
1605M8SN	25,15	530	20,04	530	20,04	630		
2006M8SN			26,09	535	26,09	635		
P							○	
M							○	
K	●		●		●		●	○
N							●	●
S							○	
H								
O							○	○

RPNX / RPHX

	-M31 CTC5240 DRAGONSKIN		-M31 CTC5240 DRAGONSKIN		-F50 CTCS245 DRAGONSKIN		-F50 CTCS245 DRAGONSKIN		-R60 CTP6215	
	RPNX		RPHX		RPHX		RPNX		RPNX	
	51 149 ...		50 493 ...		51 051 ...		51 055 ...		50 508 ...	
ISO	EUR 1H/17		EUR 1H/17		EUR 1H/17		EUR 1H/17		EUR 1B/61	
10T3M4EN			21,28	550 [1]						
10T3M4SN					21,28	570 [1]				
10T3M8EN			21,28	551						
10T3M8SN					21,28	571				
1204M4EN			23,45	552 [1]						
1204M4SN					23,45	575				
1204M6EN			23,45	56200						
1204M6SN					23,45	57800				
1204M8EN			23,45	582					15,93	300
1204M8SN					23,45	577				
1605M8EN			31,99	555	31,99	58100				
2006M8EN	31,99	12001								
2006M8SN							31,99	585		
P										
M										
K										●
N										
S		●		●		●		●		
H										●
O										

1) Insert with 4 indexes

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 181
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

R 1000 screw-in button insert milling cutter

▲ Insert angle 0°



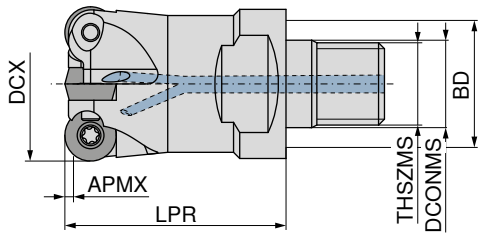

Designation	DCX mm	ZNF	APMX mm	THSZMS	LPR mm	DCONMS mm	BD mm	torque moment Nm	Insert	56 403 ... EUR WA	
R1000G.15.2.M8-07.IK	15	2	1,5	M8	28,5	8,5	13,8	0,9	RD.X 0702..	139,30	**153**
R1000G.16.3.M8-07.IK	16	3	1,5	M8	28,5	8,5	13,8	0,9	RD.X 0702..	168,50	**161**
R1000G.20.4.M10-07.IK	20	4	1,5	M10	28,5	10,5	18,0	0,9	RD.X 0702..	212,10	**203**
R1000G.25.5.M12-07.IK	25	5	1,5	M12	28,5	12,5	21,0	0,9	RD.X 0702..	242,80	**252**
R1000G.30.5.M16-07.IK	30	5	1,5	M16	28,5	17,0	29,0	0,9	RD.X 0702..	246,70	**301**
R1000G.35.6.M16-07.IK	35	6	1,5	M16	28,5	17,0	29,0	0,9	RD.X 0702..	277,30	**351**
R1000G.42.7.M16-07.IK	42	7	1,5	M16	42,5	17,0	29,0	0,9	RD.X 0702..	328,80	**421**
R1000G.20.2.M10-10.IK	20	2	2,8	M10	29,0	10,5	18,0	2,4	RD.X 1003..	148,40	**204**
R1000G.25.2.M12-10.IK	25	2	2,8	M12	33,0	12,5	21,0	2,4	RD.X 1003..	148,40	**253**
R1000G.25.3.M12-10.IK	25	3	2,8	M12	33,0	12,5	21,0	2,4	RD.X 1003..	155,20	**254**
R1000G.30.4.M12-10.IK	30	4	2,3	M12	33,0	12,5	21,0	2,4	RD.X 1003..	213,60	**302**
R1000G.30.4.M16-10.IK	30	4	2,8	M16	43,0	17,0	23,0	2,4	RD.X 1003..	213,60	**303**
R1000G.35.5.M16-10.IK	35	5	2,8	M16	43,0	17,0	29,0	2,4	RD.X 1003..	262,70	**352**
R1000G.42.5.M16-10.IK	42	5	2,8	M16	43,0	17,0	29,0	2,4	RD.X 1003..	277,30	**422**
R1000G.42.6.M16-10.IK	42	6	2,8	M16	43,0	17,0	29,0	2,4	RD.X 1003..	293,10	**423**
R1000G.24.2.M12-12.IK	24	2	3,0	M12	33,0	12,5	21,0	2,4	RD.X 12T3..	153,90	**241**
R1000G.35.3.M16-12.IK	35	3	3,0	M16	43,0	17,0	29,0	2,4	RD.X 12T3..	172,40	**353**
R1000G.35.4.M16-12.IK	35	4	3,0	M16	43,0	17,0	29,0	2,4	RD.X 12T3..	222,90	**354**
R1000G.42.4.M16-12.IK	42	4	3,0	M16	43,0	17,0	29,0	2,4	RD.X 12T3..	244,00	**424**
R1000G.42.5.M16-12.IK	42	5	3,0	M16	43,0	17,0	29,0	2,4	RD.X 12T3..	270,50	**425**
R1000G.32.2.M16-16.IK	32	2	4,0	M16	43,5	17,0	29,0	4,3	RD.X 1604..	179,20	**321**
R1000G.35.3.M16-16.IK	35	3	4,0	M16	43,5	17,0	29,0	4,3	RD.X 1604..	220,20	**355**

	TORX® blade	Clamping Screw	over clamp	Key D	Molykote	Clamping screw	Torque screwdriver
	80 950 ...	56 950 ...	56 950 ...	80 950 ...	70 950 ...	56 950 ...	80 950 ...
Spare parts Insert	EUR Y7	EUR WA	EUR WA	EUR Y7	EUR 2A/28	EUR WA	EUR Y7
RD.X 0702..	6,13 **032**			10,05 **109**	5,64 **303**	3,35 **006**	153,30 **191**
RD.X 1003..	6,13 **036**			11,96 **113**	5,64 **303**	4,30 **010**	165,90 **192**
RD.X 12T3..	6,13 **036**	2,62 **022**		11,96 **113**	5,64 **303**	4,30 **010**	165,90 **192**
RD.X 1604..	6,13 **037**		1,83 **210**	12,83 **114**	5,64 **303**	4,86 **012**	165,90 **192**

R 1007 screw-in button insert milling cutter

▲ Insert angle 7°
▲ for Steel < 10 % Cr



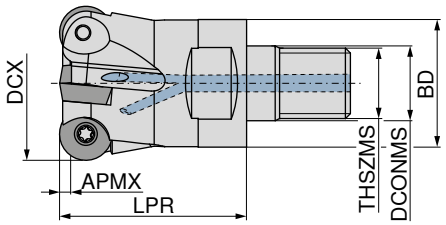

Designation	DCX mm	ZNF	APMX mm	THSZMS	LPR mm	DCONMS mm	BD mm	torque moment Nm	Insert	56 405 ... EUR WA	
R1007G.25.3.M12-10.IK	25	3	2,5	M12	32,5	12,5	21	2,4	RD.X 1003..	155,20	**251**
R1007G.42.6.M16-10.IK	42	6	2,5	M16	42,5	17,0	29	2,4	RD.X 1003..	293,10	**421**
R1007G.35.4.M16-12.IK	35	4	3,0	M16	42,5	17,0	29	2,4	RD.X 12T3..	222,90	**352**

	TORX® blade		Clamping Screw		Key D		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		56 950 ...		80 950 ...		70 950 ...		56 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR	
Insert	Y7		WA		Y7		2A/28		WA		Y7	
RD.X 1003..	6,13	**036**			11,96	**113**	5,64	**303**	4,30	**010**	165,90	**192**
RD.X 12T3..	6,13	**036**	2,62	**022**	11,96	**113**	5,64	**303**	4,30	**010**	165,90	**192**

15

R 1002 shank button insert milling cutter

▲ Insert angle 0°



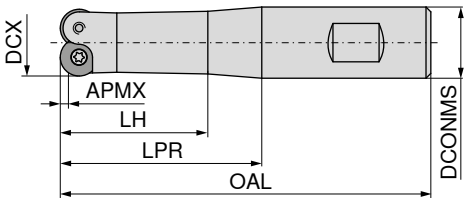

56 443 ...

Designation	DCX mm	ZNF	APMX mm	OAL mm	LPR mm	LH mm	DCONMS mm	Insert	EUR WA	
R1002C.15.2.40-07	15	2	2,6	89	40	23	16	RD.X 0702..	123,00	**151**
R1002C.15.2.60-07	15	2	2,6	109	60	23	16	RD.X 0702..	130,90	**152**
R1002C.15.2.80-07	15	2	2,6	131	80	22	20	RD.X 0702..	140,50	**153**
R1002C.15.2.100-07	15	2	2,6	151	100	22	20	RD.X 0702..	151,30	**154**
R1002C.20.2.40-10	20	2	4,0	91	40	23	20	RD.X 1003..	139,30	**201**
R1002C.20.2.60-10	20	2	4,0	111	60	23	20	RD.X 1003..	143,30	**202**
R1002C.20.2.80-10	20	2	4,0	137	80	23	25	RD.X 1003..	149,90	**203**
R1002C.20.2.100-10	20	2	4,0	157	100	23	25	RD.X 1003..	157,80	**204**
R1002C.20.2.120-10	20	2	4,0	177	125	23	25	RD.X 1003..	165,80	**205**

R 1000 shell button insert milling cutter

▲ Insert angle 0°







56 407 ...

Designation	DCX mm	ZNF	APMX mm	OAL mm	DCONMS mm	DHUB mm	torque moment Nm	Insert	EUR WA	
R1000A.42.6.43-10.IK	42	6	2,8	43,0	16	35	2,4	RD.X 1003..	293,10	**420**
R1000A.42.4.43-12.IK	42	4	3,0	43,0	16	35	2,4	RD.X 12T3..	236,10	**421**
R1000A.42.5.43-12.IK	42	5	3,0	43,0	16	35	2,4	RD.X 12T3..	270,50	**422**
R1000A.52.5.53-12.IK	52	5	3,5	53,0	22	40	2,4	RD.X 12T3..	293,10	**521**
R1000A.52.4.53,5-16.IK	52	4	4,7	53,5	22	40	4,3	RD.X 1604..	287,70	**522**
R1000A.66.5.53,5-16.IK	66	5	5,1	53,5	27	48	4,3	RD.X 1604..	340,90	**661**
R1000A.80.6.53,5-16.IK	80	6	5,8	53,5	27	60	4,3	RD.X 1604..	436,40	**801**

	TORX® blade	Clamping Screw	over clamp	Key D	Molykote	Clamping screw	Torque screwdriver	
	80 950 ...	**56 950 ...**	**56 950 ...**	**80 950 ...**	**70 950 ...**	**56 950 ...**	**80 950 ...**	
Spare parts	EUR	EUR	EUR	EUR	EUR	EUR	EUR	
Insert	Y7	WA	WA	Y7	2A/28	WA	Y7	
RD.X 1003..	6,13	**036**			11,96	**113**	5,64 **303**	4,30 **010**	165,90	**192**
RD.X 12T3..	6,13	**036**	2,62	**022**	11,96	**113**	5,64 **303**	4,30 **010**	165,90	**192**
RD.X 1604..	6,13	**037**			1,83	**210**	12,83 **114**	5,64 **303**	4,86 **012**	165,90	**192**

R 1007 shell button insert milling cutter

▲ Insert angle 7°
▲ for Steel < 10 % Cr + Milling machines with low power







Designation	DCX mm	ZNF	APMX mm	OAL mm	DCONMS mm	DHUB mm	torque moment Nm	Insert	56 409 ... EUR WA	
R1007A.42.6.42,5-10.IK	42	6	3,5	42,5	16	35	2,4	RD.X 1003..	293,10	**421**
R1007A.52.7.52,5-10.IK	52	7	3,5	52,5	22	40	2,4	RD.X 1003..	428,30	**521**
R1007A.52.5.52,5-12.IK	52	5	3,5	52,5	22	40	2,4	RD.X 12T3..	293,10	**522**
R1007A.66.6.52,5-12.IK	66	6	3,5	52,5	27	48	2,4	RD.X 12T3..	347,40	**661**
R1007A.80.7.54,5-12.IK	80	7	3,5	54,5	27	60	2,4	RD.X 12T3..	436,40	**801**
R1007A.52.5.53-16.IK	52	5	4,1	53,0	22	40	4,3	RD.X 1604..	322,20	**523**
R1007A.66.5.53-16.IK	66	5	4,6	53,0	27	48	4,3	RD.X 1604..	340,90	**662**
R1007A.66.6.53-16.IK	66	6	5,1	53,0	27	48	4,3	RD.X 1604..	390,00	**663**
R1007A.80.6.53-16.IK	80	6	5,1	53,0	27	60	4,3	RD.X 1604..	436,40	**802**
R1007A.100.7.53-16	100	7	5,1	53,0	32	70	4,3	RD.X 1604..	539,70	**910** 1)
R1007A.125.8.53-16	125	8	5,2	53,0	40	90	4,3	RD.X 1604..	611,40	**925** 1)
R1007A.160.9.53-16	160	9	5,1	53,0	40	120	4,3	RD.X 1604..	836,90	**960** 1)

1) Without Through Coolant

	TORX® blade		Clamping Screw		over clamp		Key D		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		56 950 ...		56 950 ...		80 950 ...		70 950 ...		56 950 ...		80 950 ...	
Spare parts	EUR		EUR		EUR		EUR		EUR		EUR		EUR	
Insert	Y7		WA		WA		Y7		2A/28		WA		Y7	
RD.X 1003..	6,13	**036**					11,96	**113**	5,64	**303**	4,30	**010**	165,90	**192**
RD.X 12T3..	6,13	**036**	2,62	**022**			11,96	**113**	5,64	**303**	4,30	**010**	165,90	**192**
RD.X 1604..	6,13	**037**			1,83	**210**	12,83	**114**	5,64	**303**	4,86	**012**	165,90	**192**

15

RDHX / RDMX / RDEX / RDPX

Designation	IC mm	S mm
RD.X 0702..	7	2,38
RD.X 1003..	10	3,18
RD.X 12T3..	12	3,97
RD.X 1604..	16	4,76



RDHX / RDMX / RDEX / RDPX

	WTN1205		WAN1240		WAX1240		-HP WAN2225		-F30P WUN4210	
										
	RDHX		RDMX		RDEX		RDPX		RDHX	
	56 302 ...		56 309 ...		56 314 ...		56 348 ...		56 304 ...	
ISO	EUR WB		EUR WB		EUR WB		EUR WB		EUR WB	
0702M0E									15,19	611
0702M0T	16,20	111			11,29	611				
1003M0S							16,34	231		
1003M0T	16,34	131	12,06	731	11,87	631			17,05	631
12T3M0S							17,19	241		
12T3M0T	17,19	141	13,97	741	13,52	641			20,87	641
1604M0S							21,58	251		
1604M0T	17,19	151	15,34	751	15,06	651			25,28	651
P	●		●		●					
M	●		○		○		●			
K	●		○		○				○	
N									●	
S							●			
H	●									
O									○	

Milling guide

Cutting data standard values	→ 182–184	Machining strategy	→ 185+186
Technical Information	→ 193–198	Grade description	→ 199–201
Designation System	→ 202–208		

MaxiMill – 252 Shell mill





NEW

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS mm	DHUB mm	torque moment Nm	Insert	50 689 ... EUR 2B/40	
A252.40.R.05-10	30	40	5	2,5	40	16	38	2	RNHU 1004..	517,90	**140**
A252.42.R.05-10	32	42	5	2,5	40	16	38	2	RNHU 1004..	593,90	**142**
A252.50.R.06-10	40	50	6	2,5	40	22	43	2	RNHU 1004..	615,80	**150**
A252.52.R.07-10	42	52	7	2,5	40	22	43	2	RNHU 1004..	668,80	**152**
A252.63.R.08-10	53	63	8	2,5	40	22	48	2	RNHU 1004..	758,00	**16300**
A252.80.R.10-10	70	80	10	2,5	50	27	58	2	RNHU 1004..	862,20	**18000**
A252.40.R.04-12	28	40	4	3,0	40	16	38	3,2	RNHU 1205..	475,80	**240**
A252.50.R.05-12	38	50	5	3,0	40	22	43	3,2	RNHU 1205..	577,70	**250**
A252.52.R.05-12	40	52	5	3,0	40	22	43	3,2	RNHU 1205..	579,10	**252**
A252.63.R.06-12	51	63	6	3,0	40	22	48	3,2	RNHU 1205..	713,70	**263**
A252.66.R.07-12	54	66	7	3,0	40	22	48	3,2	RNHU 1205..	751,70	**266**
A252.80.R.08-12	68	80	8	3,0	50	27	58	3,2	RNHU 1205..	821,10	**280**
A252.100.R.10-12	88	100	10	3,0	50	32	78	3,2	RNHU 1205..	977,10	**30000**
A252.125.R.12-12	113	125	12	3,0	63	40	88	3,2	RNHU 1205..	1.182,00	**32500**

	TORX® blade		Clamping key – T		Key D		Power Screw		Molykote		Clamping screw		Torque screwdriver	
	80 950 ...		80 397 ...		80 950 ...		70 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts Insert	EUR Y7		EUR Y7		EUR Y7		EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR Y7	
RNHU 1004.. (Ø40 – Ø80)	6,78	**053**			14,91	**127**			5,64	**303**	3,97	**710**	165,90	**192**
RNHU 1205.. (Ø40)	6,78	**054**	5,04	**040**	15,33	**128**	16,08	**151**	5,64	**303**	4,11	**839**	165,90	**192**
RNHU 1205.. (Ø50 – Ø125)	6,78	**054**			15,33	**128**			5,64	**303**	4,11	**839**	165,90	**192**

15

RNHU

Designation	IC mm	D1 mm	S mm
RNHU 1004..	10	3,4	4,60
RNHU 1205..	12	4,4	5,30



RNHU

	NEW	NEW	NEW	NEW	NEW	NEW
	-M50 CTPP235	-F50 CTPM240	-M31 CTPM245	-M32 CTPM245	-M31 CTC5240	-M31 CTC5240
	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
	RNHU	RNHU	RNHU	RNHU	RNHU	RNHU
	51 130 ...	51 129 ...	51 106 ...	51 107 ...	50 520 ...	50 521 ...
ISO	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17	EUR 1H/17	EUR 1H/17
1004M4ER	24,11 12000	24,11 42000	32,60 470	32,60 470	32,60 550	
1205M4ER		26,10 42500	35,71 475	35,71 475		35,71 552
1205M4SR	26,10 12500					
P	●	○	●	●		
M	○	●	●	●		
K	○					
N						
S					●	●
H						
O						

Milling guide

Cutting data standard values	→ 145–148	Machining strategy	→ 187
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

K 2000 / K 2001 shank copy milling cutter

▲ with carbide shank



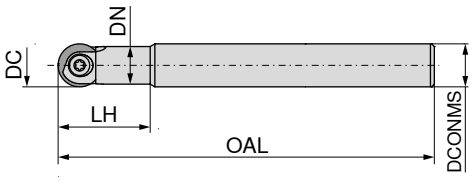

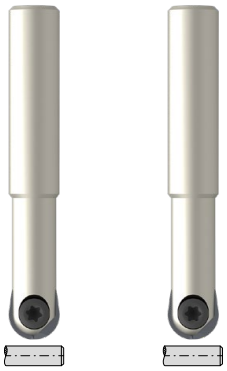

ISO designation	DC mm	DN mm	LH mm	OAL mm	DCONMS mm	torque moment Nm	56 100 ... EUR WA		56 101 ... EUR WA	
K2000C.6.16.100	6	5,3	16	100	8	0,5	453,60	060 [1]		
K2000C.6.20.100	6	5,8	20	100	6	0,5	453,60	061 [1]		
K2000C.6.70.150	6	5,8	70	150	6	0,5	588,80	062 [1]		
K2000C.6.100.200	6	5,8	100	200	6	0,5	713,40	063 [1]		
K2000C.8.25.80	8	7,0	25	80	8	1	480,10	081 [1]		
K2000C.8.25.100	8	7,0	25	100	8	1	480,10	082 [1]		
K2000C.8.40.150	8	7,0	40	150	8	1	533,20	083 [1]		
K2000C.10.35.80	10	8,8	35	80	10	3	579,60	101 [1]		
K2000C.10.35.120	10	8,8	35	120	10	3	596,90	102 [1]		
K2000C.10.50.150	10	8,8	50	150	10	3	661,80	103 [1]		
K2000C.12.35.80	12	10,5	35	80	12	4	602,00	121 [1]		
K2001C.12.35.80	12	10,5	35	80	12	4			613,70	121
K2000C.12.35.120	12	10,5	35	120	12	4	628,60	122 [1]		
K2001C.12.35.120	12	10,5	35	120	12	4			640,80	122
K2000C.12.50.160	12	10,5	50	160	12	4	672,40	123 [1]		
K2001C.12.50.160	12	10,5	50	160	12	4			685,40	123
K2001C.16.40.100	16	14,0	40	100	16	5			845,00	161
K2001C.16.40.140	16	14,0	40	140	16	5			845,00	162
K2001C.16.55.175	16	14,0	55	175	16	5			920,50	163
K2001C.20.50.100	20	18,0	50	100	20	5			1.076,00	201
K2001C.20.50.140	20	18,0	50	140	20	5			1.076,00	202
K2001C.20.75.190	20	18,0	75	190	20	5			1.279,00	203
K2001C.25.60.160	25	22,4	60	160	25	8			1.524,00	252
K2001C.25.90.210	25	22,4	90	210	25	8			1.906,00	253

1) Without Through Coolant

Applicable inserts

	ROHX-FM3, ROHX-FM4, ROHX-FM6, ROHX-MR5, ROGX-MR4

	XOHX06.. -MR2, XOHX-FM1

15

K 2002 shank copy milling cutter

▲ cylindrical steel shank version



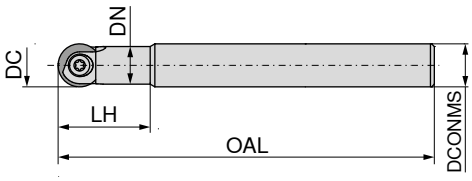

56 102 ...

Designation	DC mm	DN mm	LH mm	OAL mm	DCONMS mm	torque moment Nm	EUR WA	
K2002C.12.32.90	12	10,5	32	90	12	4	118,30	**121**
K2002C.12.32.130	12	10,5	32	130	12	4	118,30	**122**
K2002C.12.46.150	12	10,5	46	150	12	4	123,80	**123**
K2002C.16.36.100	16	14,0	36	100	16	5	125,40	**161**
K2002C.16.36.140	16	14,0	36	140	16	5	125,40	**162**
K2002C.16.53.160	16	14,0	53	160	16	5	132,00	**163**
K2002C.20.45.160	20	18,0	45	160	20	5	130,80	**202**
K2002C.20.61.175	20	18,0	61	175	20	5	156,40	**203**
K2002C.25.45.160	25	22,4	45	160	25	8	184,30	**252**
K2002C.25.70.190	25	22,4	70	190	25	8	190,90	**253**
K2002C.32.56.175	32	28,6	56	175	32	8	234,80	**322**
K2002C.32.80.210	32	28,6	80	210	32	8	246,70	**323**

Applicable inserts

	ROHX-FM3, ROHX-FM4, ROHX-FM6, ROHX-MR5, ROGX-MR4

	XOHX-FM1

K 2003 shank copy milling cutter

▲ tapered execution



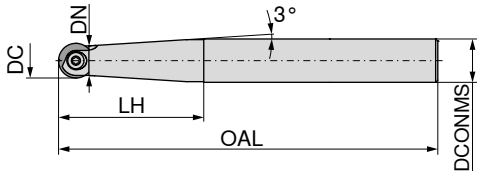

56 104 ...

Designation	DC mm	DN mm	LH mm	OAL mm	DCONMS mm	torque moment Nm	EUR WA	
K2003C.6.16.90	6	5,3	40	90	10	0,5	132,70	**061**
K2003C.8.50.85	8	7,5	50	85	12	1	157,80	**081**
K2003C.8.50.140	8	7,5	50	140	12	1	157,80	**082**
K2003C.10.35.85	10	9,0	35	85	12	3	157,80	**101**
K2003C.10.35.150	10	9,0	35	150	12	3	157,80	**102**
K2003C.12.60.110	12	10,5	60	110	16	4	160,50	**121**
K2003C.12.60.160	12	10,5	60	160	16	4	160,50	**122**
K2003C.16.67.120	16	14,0	67	120	20	5	172,40	**161**
K2003C.16.67.175	16	14,0	67	175	20	5	172,40	**162**
K2003C.20.80.190	20	18,0	80	190	25	5	200,40	**201**
K2003C.25.100.210	25	22,4	100	210	32	8	249,40	**251**
K2003C.32.123.240	32	28,6	123	240	40	8	319,60	**321**

Applicable inserts

	ROHX-FM3, ROHX-FM4, ROHX-FM6, ROHX-MR5, ROGX-MR4

	XOHX-FM1

K 2000 screw-in copy milling cutter



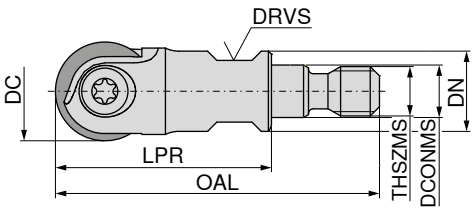

Designation	DC mm	LPR mm	DN mm	OAL mm	DCONMS mm	THSZMS	DRVS mm	torque moment Nm	56 120 ... EUR WA	
K2000G.8.25.M6	8	25	10	39,5	6,5	M6	8	1	264,00	**081** 1)
K2000G.10.25.M6	10	25	10	39,5	6,5	M6	8	3	261,20	**101** 1)
K2000G.12.25.M6	12	25	10	39,5	6,5	M6	8	4	269,30	**121** 1)
K2000G.12.26.M8	12	26	13	43,5	8,5	M8	10	4	269,30	**122**
K2000G.16.26.M8	16	26	13	43,5	8,5	M8	10	5	279,70	**161**
K2000G.20.30.M10	20	30	18	49,5	10,5	M10	15	5	285,20	**201**
K2000G.25.40.M12	25	40	21	62,0	12,5	M12	17	8	295,70	**251**
K2000G.32.45.M16	32	45	30	69,0	17,0	M16	26	8	315,60	**321**

1) Without Through Coolant

Applicable inserts

ROHX-FM3, ROHX-FM4, ROHX-FM6, ROHX-MR5, ROGX-MR4

XOHX-FM1

TORX® blade

Key D

Molykote

Clamping screw

Torque screwdriver

Spare parts DC	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		56 950 ... EUR WA		80 950 ... EUR Y7	
6	6,13	031	10,87	108	5,64	303	7,71	041	153,30	191
8	6,13	033	10,05	110	5,64	303	7,71	042	153,30	191
10	6,13	036	11,96	113	5,64	303	7,71	043	170,10	193
12	6,13	037	12,83	114	5,64	303	10,54	044	170,10	193
16	6,13	037	12,83	114	5,64	303	10,54	045	170,10	193
20	6,13	037	12,83	114	5,64	303	10,54	046	170,10	193
25			15,60	131	5,64	303	10,54	047		
32			15,60	131	5,64	303	10,68	048		

ROHX / XOHX / ROGX

Designation	IC mm	S mm
ROHX0616R..	6	1,60
ROHX0820R..	8	2,00
ROHX1025R..	10	2,50
XOHX10254..	10	2,50
XOHX12255..	12	2,50
RO.X1225R..	12	2,50
RO.X1630R..	16	3,00
XOHX16307..	16	3,00
XOHX20309..	20	3,00
RO.X2030R..	20	3,00
RO.X2540R..	25	4,00
RO.X3250R..	32	5,00



RO.X



XOHX

ROHX / XOHX / ROGX

		-MR5 CTPP211	-FM1 CTPP216	-FM3 CTPP216	-FM4 CTPP216	-FM4 CTPK226	-MR4 CTPK231	-FM6 CTCN211
		ROHX	XOHX	ROHX	ROHX	ROHX	ROGX	ROHX
		56 149 ...	56 169 ...	56 147 ...	56 141 ...	56 141 ...	56 143 ...	56 145 ...
ISO	RE mm	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB
0616 R3	3,0			40,56 30200	33,83 90200			101,20 602 1)
0820 R4	4,0	41,24 71300		49,19 31300	32,50 71300	34,07 11300		131,70 613 1)
1025 R5	5,0	41,24 72400		49,19 32400	32,50 72400	34,07 12400		131,70 624 1)
102540	4,0		44,54 92400					
1225 R6	6,0			49,99 33500	33,83 73500	34,07 13500	33,15 53500	131,70 635 1)
122550	5,0		47,73 93500					
1630 R8	8,0			53,84 34600	38,85 74600	39,71 14600	38,85 54600	149,20 646 1)
163070	7,0		51,05 94700					
2030 R10	10,0			57,02 35700	44,54 75700	44,38 15700	44,54 55700	
203090	9,0		58,20 95900					
2540 R12,5	12,5			70,94 36800	66,43 76800	66,20 16800	65,65 56800	
3250 R16	16,0			95,07 37900	97,04 77900	98,15 17900	90,56 57900	
P		●	●	●	●	●	●	
M		○	○	○	○	●	●	
K		○	●	●	●	●	●	
N		○	○	○	○		○	○
S		○	○	○	○		○	
H		○	●	●	●	○	○	
O		○	○	○	○			●

1) Specifically for machining graphite !

Milling guide

Cutting data standard values	→ 188+189	Depth of Cut	→ 190
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

K 2005 / K 2006 shank copy milling cutter

▲ with carbide shank



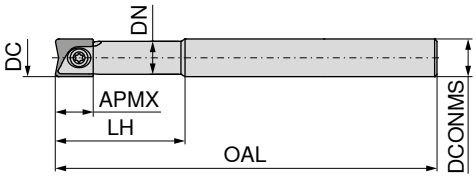

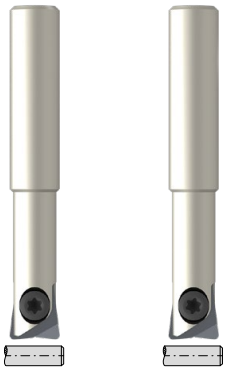

Designation	DC mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS mm	torque moment Nm	56 110 ... EUR WA		56 111 ... EUR WA	
K2005C.8.27.82	8	9,5	7,0	27	82	8	1	480,10	**081** 1)		
K2005C.8.27.102	8	9,5	7,0	27	102	8	1	480,10	**082** 1)		
K2005C.8.42.152	8	9,5	7,0	42	152	8	1	533,20	**083** 1)		
K2005C.10.37.82	10	11,5	8,8	37	82	10	3	579,60	**101** 1)		
K2005C.10.37.122	10	11,5	8,8	37	122	10	3	596,90	**102** 1)		
K2005C.10.52.152	10	11,5	8,8	52	152	10	3	661,80	**103** 1)		
K2005C/K2006C.12.37.82	12	14,0	10,5	37	82	12	4	602,00	**121** 1)	613,70	**121**
K2005C/K2006C.12.37.122	12	14,0	10,5	37	122	12	4	628,60	**122** 1)	640,80	**122**
K2005C/K2006C.12.52.162	12	14,0	10,5	52	162	12	4	672,40	**123** 1)	685,40	**123**
K2006C.16.42.102	16	16,0	14,0	42	102	16	5			845,00	**161**
K2006C.16.42.142	16	16,0	14,0	42	142	16	5			845,00	**162**
K2006C.16.57.177	16	16,0	14,0	57	177	16	5			920,50	**163**
K2006C.20.52.102	20	18,0	18,0	52	102	20	5			1.076,00	**201**
K2006C.20.52.142	20	18,0	18,0	52	142	20	5			1.076,00	**202**
K2006C.20.77.192	20	18,0	18,0	77	192	20	5			1.262,00	**203**
K2006C.25.62.162	25	23,5	22,4	62	162	25	8			1.524,00	**252**
K2006C.25.92.212	25	23,5	22,4	92	212	25	8			1.906,00	**253**

1) Without Through Coolant

Applicable inserts

	XOHX-FM2 / -FM5 / -MR2 / -MR3 / -MR6
	XOGX-MF4

K 2007 shank copy milling cutter



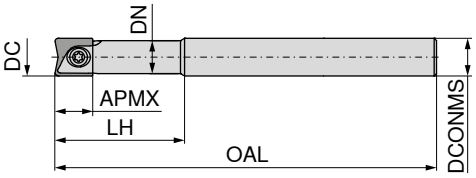

56 112 ...

Designation	DC mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS mm	torque moment Nm	EUR WA	
K2007C.12.34.132	12	14,0	10,5	34	132	12	4	118,30	**122**
K2007C.12.34.92	12	14,0	10,5	34	92	12	4	129,30	**121**
K2007C.12.48.152	12	14,0	10,5	48	152	12	4	123,80	**123**
K2007C.16.38.102	16	16,0	14,0	38	102	16	5	125,40	**161**
K2007C.16.38.142	16	16,0	14,0	38	142	16	5	125,40	**162**
K2007C.16.55.162	16	16,0	14,0	55	162	16	5	132,00	**163**
K2007C.20.47.162	20	18,0	18,0	47	162	20	5	130,80	**202**
K2007C.20.63.177	20	18,0	18,0	63	177	20	5	156,40	**203**
K2007C.25.47.162	25	23,5	22,4	47	162	25	8	184,30	**252**
K2007C.25.72.192	25	23,5	22,4	72	192	25	8	190,90	**253**
K2007C.32.58.177	32	28,0	28,6	58	177	32	8	234,80	**322**
K2007C.32.82.212	32	28,0	28,6	82	212	32	8	246,70	**323**

Applicable inserts

	XOHX-FM2 / -FM5 / -MR2 / -MR3 / -MR6
	XOGX-MF4

K 2005 screw-in copy milling cutter



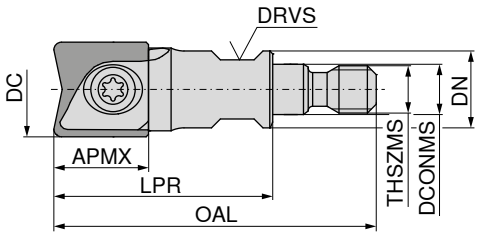

56 130 ...

Designation	DC mm	APMX mm	DN mm	LPR mm	OAL mm	DCONMS mm	THSZMS	DRVS mm	torque moment Nm	EUR WA	
K2005G.8.25.M6	8	9,5	10	25	39,5	6,5	M6	8	1	264,00	**081** [1]
K2005G.10.25.M6	10	11,5	10	25	39,5	6,5	M6	8	3	261,20	**101** [1]
K2005G.12.25.M6	12	14,0	10	25	39,5	6,5	M6	8	4	269,30	**121** [1]
K2005G.12.28.M8	12	14,0	13	28	45,5	8,5	M8	8	4	269,30	**122**
K2005G.16.28.M8	16	16,0	13	28	45,5	8,5	M8	10	5	279,70	**161**
K2005G.20.32.M10	20	18,0	18	32	51,5	10,5	M10	15	5	285,20	**201**
K2005G.25.42.M12	25	23,5	21	42	64,0	12,5	M12	17	8	295,70	**251**
K2005G.32.47.M16	32	28,0	30	47	71,0	17,0	M16	26	8	315,60	**321**

1) Without Through Coolant

Applicable inserts

	XOHX-FM2 / -FM5 / -MR2 / -MR3 / -MR6
	XOGX-MF4

TORX® blade

80 950 ...

Key D

80 950 ...

Molykote

70 950 ...

Clamping screw

56 950 ...

Torque screwdriver

80 950 ...

Spare parts DC	EUR Y7		EUR Y7		EUR 2A/28		EUR WA		EUR Y7	
8	6,13	**033**	10,05	**110**	5,64	**303**	7,71	**042**	153,30	**191**
10	6,13	**036**	11,96	**113**	5,64	**303**	7,71	**043**	170,10	**193**
12	6,13	**037**	12,83	**114**	5,64	**303**	10,54	**044**	170,10	**193**
16	6,13	**037**	12,83	**114**	5,64	**303**	10,54	**045**	170,10	**193**
20	6,13	**037**	12,83	**114**	5,64	**303**	10,54	**046**	170,10	**193**
25			15,60	**131**	5,64	**303**	10,54	**047**		
32			15,60	**131**	5,64	**303**	10,68	**048**		

XOHX / XOGX

Designation	IC mm	S mm	L mm
XO.X10251..	10	2,50	11,5
XO.X12251..	12	2,50	14,0
XO.X16301..	16	3,00	16,0
XO.X16303..	16	3,00	16,0
XO.X20301..	20	3,00	18,0
XO.X20304..	20	3,00	18,0
XOGX12252..	12	2,50	14,0
XOHX06160..	6	1,60	8,0
XOHX08200..	8	2,00	9,5
XOHX08201..	8	2,00	9,5
XOHX10250..	10	2,50	11,5
XOHX12252..	12	3,00	14,0
XOHX20302..	20	3,00	18,0
XOHX25401..	25	4,00	23,5
XOHX25402..	25	4,00	23,5
XOHX25405..	25	4,00	23,5
XOHX32502..	32	5,00	28,0



XOGX



XOHX



XOHX



XOHX

XOHX / XOGX

	-MR2 CTPP211	-MR6 CTPP211	-FM2 CTPP216	-FM5 CTPP216	-MF4 CTPP216	-MR3 CTPK231	-MR2 CTCN211
	XOHX	XOHX	XOHX	XOHX	 XOGX	 XOHX	XOHX
	56 167 ...	56 163 ...	56 165 ...	56 159 ...	56 161 ...	56 171 ...	56 168 ...
ISO / RE mm	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB	EUR WB
061605 0,5	42,16 71000						101,20 610 1)
082006 0,6		45,36 71000	39,92 71000	34,87 71000			
082010 1,0	46,15 71200		39,92 71200				121,00 612 1)
102508 0,8		45,36 72100	39,92 72100	34,47 72100		50,24 32100	
102510 1,0	46,15 72200		39,92 72200		40,31 92200		128,70 622 1)
122510 1,0	49,44 73200	49,44 73200	41,24 73200	38,85 73200	43,74 93200	50,24 53200	139,40 632 1)
122520 2,0	49,44 73500		41,24 73500		43,74 93500		
163010 1,0	53,41 74200		47,73 74200		49,44 94200		173,40 642 1)
163013 1,3		52,63 74300	47,73 74300	44,54 74300			
163015 1,5						53,41 54400	
163030 3,0	53,41 74700		47,73 74500		49,44 94700		
203010 1,0	61,52 75200		52,63 75200		55,81 95200		
203016 1,6		59,92 75400	52,63 75400	51,05 75400			
203020 2,0						63,11 55500	
203040 4,0	61,52 75800		52,63 75800		55,81 95800		
254010 1,0	78,49 76200		68,02 76200				
254020 2,0		82,47 76500	68,02 76500	71,19 76500			
254050 5,0	78,49 76900		68,02 76900				
325025 2,5		116,50 77600		98,78 77600			
P	●	●	●	●	●	●	
M	○	○	○	○	○	●	
K	○	○	●	●	●	●	
N	○	○	○	○	○	○	○
S	○	○	○	○	○	○	
H	○	○	●	●	●	○	
O	○	○	○	○	○		●

1) Specifically for machining graphite !

Milling guide

Cutting data standard values	→ 188+189	Depth of Cut	→ 190
Technical Information	→ 193–198	Chip groove description and overview	→ 199–201
Grade description and overview	→ 202–208		

15

Application tips – **MaxiMill** – Slot-SX

▲ The following components are required to complete the tool:

Spanner



Grooving insert

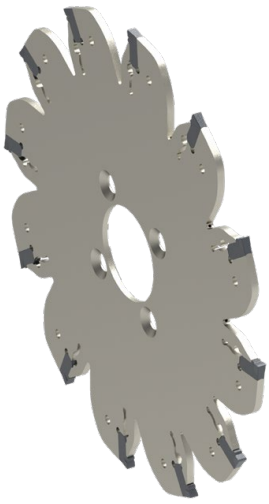

Saw cutters



Multipurpose milling cutter adapter

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



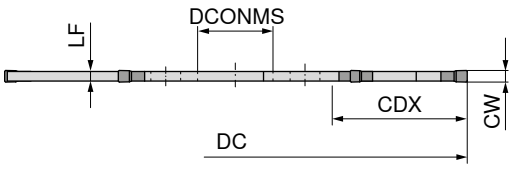

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 383 ... EUR 2B/40	
ASLOT.80.R.6.13.DC-SX2	80	2	23	13	1,65	6	SX E2 ..	AD.SLOT.13...	605,00	**08002**
ASLOT.80.R.6.13.DC-SX3	80	3	23	13	2,50	6	SX E3 ..	AD.SLOT.13...	605,00	**08003**
ASLOT.80.R.4.13.DC-SX4	80	4	23	13	3,50	4	SX E4 ..	AD.SLOT.13...	605,00	**08004**
ASLOT.80.R.4.13.DC-SX5	80	5	23	13	4,50	4	SX E5 ..	AD.SLOT.13...	605,00	**08005**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 383 08002	5,57	**00100**	33,63	**836**
50 383 08003	5,57	**00100**	33,63	**836**
50 383 08004	5,57	**00100**	34,31	**837**
50 383 08005	5,57	**00100**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws

Direct Cooling

κ = 90°

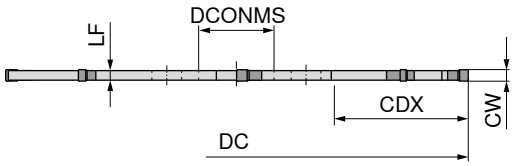

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 384 ... EUR 2B/40	
ASLOT.100.R.8.22.DC-SX2	100	2	29	22	1,65	8	SX E2 ..	AD.SLOT.22...	806,70	**10002**
ASLOT.100.R.8.22.DC-SX3	100	3	29	22	2,50	8	SX E3 ..	AD.SLOT.22...	806,70	**10003**
ASLOT.100.R.6.22.DC-SX4	100	4	29	22	3,50	6	SX E4 ..	AD.SLOT.22...	806,70	**10004**
ASLOT.100.R.6.22.DC-SX5	100	5	29	22	4,50	6	SX E5 ..	AD.SLOT.22...	806,70	**10005**
ASLOT.100.R.4.22.DC-SX6	100	6	29	22	5,40	4	SX E6 ..	AD.SLOT.22...	806,70	**10006**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 384 10002	5,57	**00100**	33,63	**836**
50 384 10003	5,57	**00100**	33,63	**836**
50 384 10004	5,57	**00100**	34,31	**837**
50 384 10005	5,57	**00100**	34,31	**837**
50 384 10006	5,57	**00100**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



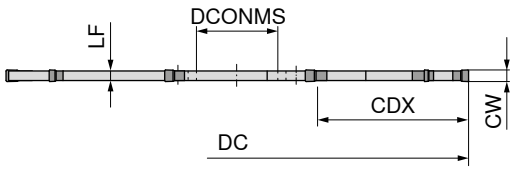

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 385 ... EUR 2B/40	
ASLOT.125.R.10.22.DC-SX2	125	2	42	22	1,65	10	SX E2 ..	AD.SLOT.22...	1.008,00	**12502**
ASLOT.125.R.10.22.DC-SX3	125	3	42	22	2,50	10	SX E3 ..	AD.SLOT.22...	1.008,00	**12503**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 385 12502	5,57	**00100**	33,63	**836**
50 385 12503	5,57	**00100**	33,63	**836**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws

Direct Cooling

κ = 90°

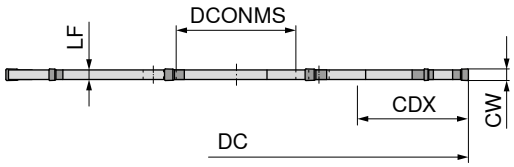

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 386 ... EUR 2B/40	
ASLOT.125.R.10.32.DC-SX2	125	2	30	32	1,65	10	SX E2 ..	AD.SLOT.32...	1.008,00	**12502**
ASLOT.125.R.10.32.DC-SX3	125	3	30	32	2,50	10	SX E3 ..	AD.SLOT.32...	1.008,00	**12503**
ASLOT.125.R.8.32.DC-SX4	125	4	30	32	3,50	8	SX E4 ..	AD.SLOT.32...	1.008,00	**12504**
ASLOT.125.R.8.32.DC-SX5	125	5	30	32	4,50	8	SX E5 ..	AD.SLOT.32...	1.008,00	**12505**
ASLOT.125.R.8.32.DC-SX6	125	6	30	32	5,40	8	SX E6 ..	AD.SLOT.32...	1.008,00	**12506**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 386 12502	5,76	**00200**	33,63	**836**
50 386 12503	5,76	**00200**	33,63	**836**
50 386 12504	5,76	**00200**	34,31	**837**
50 386 12505	5,76	**00200**	34,31	**837**
50 386 12506	5,76	**00200**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



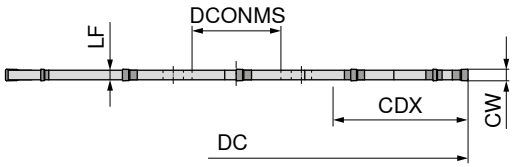

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 387 ... EUR 2B/40	
ASLOT.160.R.12.32.DC-SX2	160	2	48	32	1,65	12	SX E2 ..	AD.SLOT.32...	1.139,00	**16002**
ASLOT.160.R.12.32.DC-SX3	160	3	48	32	2,50	12	SX E3 ..	AD.SLOT.32...	1.139,00	**16003**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 387 16002	5,76	**00200**	33,63	**836**
50 387 16003	5,76	**00200**	33,63	**836**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



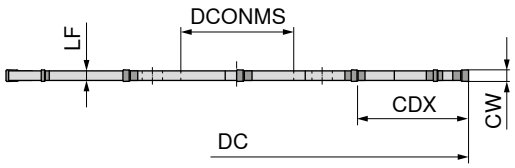

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 388 ... EUR 2B/40	
ASLOT.160.R.12.40.DC-SX2	160	2	39	40	1,65	12	SX E2 ..	AD.SLOT.40...SK	1.139,00	**16002**
ASLOT.160.R.12.40.DC-SX3	160	3	39	40	2,50	12	SX E3 ..	AD.SLOT.40...SK	1.139,00	**16003**
ASLOT.160.R.10.40.DC-SX4	160	4	39	40	3,50	10	SX E4 ..	AD.SLOT.40...SK	1.139,00	**16004**
ASLOT.160.R.10.40.DC-SX5	160	5	39	40	4,50	10	SX E5 ..	AD.SLOT.40...SK	1.139,00	**16005**
ASLOT.160.R.10.40.DC-SX6	160	6	39	40	5,40	10	SX E6 ..	AD.SLOT.40...SK	1.139,00	**16006**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 388 16002	20,76	**00300**	33,63	**836**
50 388 16003	20,76	**00300**	33,63	**836**
50 388 16004	20,76	**00300**	34,31	**837**
50 388 16005	20,76	**00300**	34,31	**837**
50 388 16006	20,76	**00300**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



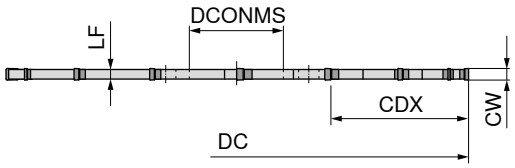

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 389 ... EUR 2B/40	
ASLOT.200.R.16.40.DC-SX2	200	2	59	40	1,65	16	SX E2 ..	AD.SLOT.40...SK	1.519,00	**20002**
ASLOT.200.R.16.40.DC-SX3	200	3	59	40	2,50	16	SX E3 ..	AD.SLOT.40...SK	1.519,00	**20003**
ASLOT.200.R.14.40.DC-SX4	200	4	59	40	3,50	14	SX E4 ..	AD.SLOT.40...SK	1.519,00	**20004**
ASLOT.200.R.14.40.DC-SX5	200	5	59	40	4,50	14	SX E5 ..	AD.SLOT.40...SK	1.519,00	**20005**
ASLOT.200.R.14.40.DC-SX6	200	6	59	40	5,40	14	SX E6 ..	AD.SLOT.40...SK	1.519,00	**20006**

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 389 20002	20,76	**00300**	33,63	**836**
50 389 20003	20,76	**00300**	33,63	**836**
50 389 20004	20,76	**00300**	34,31	**837**
50 389 20005	20,76	**00300**	34,31	**837**
50 389 20006	20,76	**00300**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



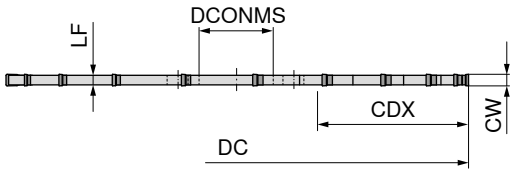

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 380 ... EUR 2B/40	
ASLOT.250.R.20.40.DC-SX3	250	3	84	40	2,5	20	SX E3 ..	AD.SLOT.40...ZK	2.669,00	**25003**
ASLOT.250.R.18.40.DC-SX4	250	4	84	40	3,5	18	SX E4 ..	AD.SLOT.40...ZK	2.669,00	**25004**
ASLOT.250.R.18.40.DC-SX5	250	5	84	40	4,5	18	SX E5 ..	AD.SLOT.40...ZK	2.670,00	**25005**
ASLOT.250.R.18.40.DC-SX6	250	6	84	40	5,4	18	SX E6 ..	AD.SLOT.40...ZK	3.535,00	**25006**[1)]

1) Not ex-stock

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 380 25003	20,76	**00400**	33,63	**836**
50 380 25004	20,76	**00400**	34,31	**837**
50 380 25005	20,76	**00400**	34,31	**837**
50 380 25006	20,76	**00400**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



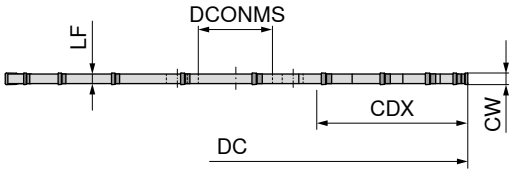

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 390 ... EUR 2B/40	
ASLOT.250.R.20.40-SX3	250	3	84	40	2,5	20	SX E3 ..	AD.SLOT.40...ZK	1.827,00	**25003**
ASLOT.250.R.18.40-SX4	250	4	84	40	3,5	18	SX E4 ..	AD.SLOT.40...ZK	1.827,00	**25004**
ASLOT.250.R.18.40-SX5	250	5	84	40	4,5	18	SX E5 ..	AD.SLOT.40...ZK	1.827,00	**25005**
ASLOT.250.R.18.40-SX6	250	6	84	40	5,4	18	SX E6 ..	AD.SLOT.40...ZK	2.729,00	**25006**[1)]

1) Not ex-stock

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 390 25003	20,76	**00400**	33,63	**836**
50 390 25004	20,76	**00400**	34,31	**837**
50 390 25005	20,76	**00400**	34,31	**837**
50 390 25006	20,76	**00400**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX slot milling and parting off cutter

Scope of supply:

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



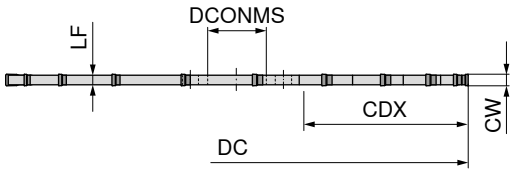

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS $_{H6}$ mm	LF mm	ZEFP	Insert	Adapter	50 391 ... EUR 2B/40	
ASLOT.315.R.22.40-SX4	315	4	115	40	3,5	22	SX E4 ..	AD.SLOT.40...ZK	2.041,00	**31504**
ASLOT.315.R.22.40-SX5	315	5	115	40	4,5	22	SX E5 ..	AD.SLOT.40...ZK	2.041,00	**31505**
ASLOT.315.R.22.40-SX6	315	6	115	40	5,4	22	SX E6 ..	AD.SLOT.40...ZK	3.535,00	**31506**[1)]

1) Not ex-stock

Clamping screw

Ejector SX

Spare parts for Article no.	50 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
50 391 31504	20,76	**00400**	34,31	**837**
50 391 31505	20,76	**00400**	34,31	**837**
50 391 31506	20,76	**00400**	34,31	**837**

Suitable multipurpose milling cutter adapters can be found on → **Page 136**

MaxiMill – Slot-SX multipurpose milling cutter adapter

Scope of supply:

Multipurpose milling cutter adapter including screws





NEW

Designation	DCONMS mm	DCONWS h6 mm	DHUB mm	LB mm	OAL mm	BD mm	50 395 ... EUR 2E/45	
AD.SLOT.13.32.A16	16	13	38	35	37,5	32	188,90	**01300**
AD.SLOT.22.40.A22	22	22	48	35	37,5	40	193,90	**02200**
AD.SLOT.22.40.A22.40	22	22	40	35	37,5	40	193,90	**02300**
AD.SLOT.32.63.A27	27	32	58	45	47,5	63	211,60	**03200**
AD.SLOT.40.80.A32.SK	32	40	78	55	57,5	80	268,10	**04000**
AD.SLOT.40.80.A32.ZK	32	40	78	55	57,5	80	268,10	**04100**

	Clamping screw		Clamping screw		Clamping screw		Power Screw	
	50 950 ...		50 950 ...		50 950 ...		70 950 ...	
Spare parts for Article no.	EUR 2A/28		EUR 2A/28		EUR 2A/28		EUR 2A/28	
50 395 01300	5,57	**00100**					16,08	**151**
50 395 02200	5,57	**00100**						
50 395 03200	5,76	**00200**						
50 395 04000					20,76	**00300**		
50 395 04100			20,76	**00400**				

MaxiMill – Slot-SX screw-in multipurpose milling cutter

Scope of supply:

Screw-in multipurpose milling cutter **without** assembly key

κ = 90°

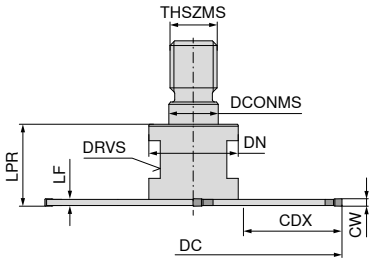



NEW

50 392 ...

Designation	DC mm	CW mm	CDX mm	DCONMS mm	THSZMS	LF mm	DN mm	LPR mm	DRVS mm	ZEFP	Insert	EUR 2B/40	
GSLOT.63.R.4.M10.DC-SX2	63	2	21	10,5	M10	1,65	19	18	15	4	SX E2 ..	700,00	**06302**
GSLOT.63.R.4.M10.DC-SX3	63	3	21	10,5	M10	2,50	19	18	15	4	SX E3 ..	700,00	**06303**

70 950 ...

Spare parts for Article no.	EUR 2A/28	
50 392 06302	33,63	**836**
50 392 06303	33,63	**836**

MaxiMill – Slot-SX screw-in multipurpose milling cutter

Scope of supply:

Screw-in multipurpose milling cutter **without** assembly key

κ = 90°

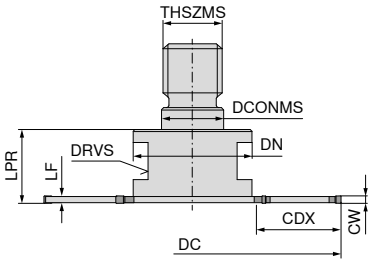

NEW

50 393 ...

Designation	DC mm	CW mm	CDX mm	DCONMS mm	THSZMS	LF mm	DN mm	LPR mm	DRVS mm	ZEFP	Insert	EUR 2B/40	
GSLOT.80.R.6.M16.DC-SX2	80	2	23	17	M16	1,65	32	20	24	6	SX E2 ..	877,90	**08002**
GSLOT.80.R.6.M16.DC-SX3	80	3	23	17	M16	2,50	32	20	24	6	SX E3 ..	877,90	**08003**
GSLOT.80.R.4.M16.DC-SX4	80	4	23	17	M16	3,50	32	20	24	4	SX E4 ..	877,90	**08004**

70 950 ...

Spare parts for Article no.	EUR 2A/28	
50 393 08002	33,63	**836**
50 393 08003	33,63	**836**
50 393 08004	34,31	**837**

MaxiMill – Slot-SX screw-in multipurpose milling cutter

Scope of supply:

Screw-in multipurpose milling cutter **without** assembly key

κ = 90°

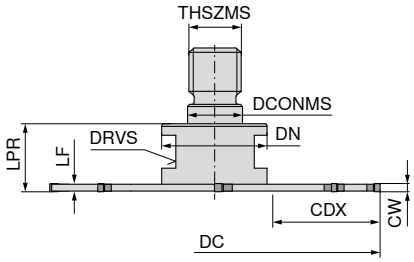

NEW

Designation	DC mm	CW mm	CDX mm	DCONMS mm	THSZMS	LF mm	DN mm	LPR mm	DRVS mm	ZEFP	Insert	50 394 ... EUR 2B/40	
GSLOT.100.R.8.M16.DC-SX2	100	2	33	17	M16	1,65	32	20	24	8	SX E2 ..	1.044,00	**10002**
GSLOT.100.R.8.M16.DC-SX3	100	3	33	17	M16	2,50	32	20	24	8	SX E3 ..	1.044,00	**10003**
GSLOT.100.R.6.M16.DC-SX4	100	4	33	17	M16	3,50	32	20	24	6	SX E4 ..	1.044,00	**10004**

Ejector SX

Spare parts for Article no.	70 950 ... EUR 2A/28	
50 394 10002	33,63	**836**
50 394 10003	33,63	**836**
50 394 10004	34,31	**837**

Suitable adapters for screw-in cutters can be found in – Chapter 16 Adapters and accessories

Insert SX

F	M	R
◢		



-F2
CTP1340
DRAGONSKIN

Designation	CW mm	RE mm	PDPT mm	for tool holder	70 346 ... EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2	23,67	**622**
SX E3.00 N 0.30	3	0,3	2,0	-SX3	25,44	**623**
SX E4.00 N 0.40	4	0,4	2,5	-SX4	26,91	**624**

P	●
M	●
K	○
N	○
S	●
H	
O	

Insert SX



F	M	R
	◢	



-M1
CTCP335
DRAGONSKIN

-M1
CTP1340
DRAGONSKIN

Designation	IH	CW mm	RE mm	for tool holder	70 342 ... EUR 1C/72		70 342 ... EUR 1C/72	
SX E2.00 N 0.20	N	2	0,2	-SX2	15,87	**52200**	15,87	**622**
SX E3.00 N 0.20	N	3	0,2	-SX3	16,89	**523**	16,89	**623**
SX E4.00 N 0.30	N	4	0,3	-SX4	17,80	**524**	17,80	**624**
SX E5.00 N 0.30	N	5	0,3	-SX5	18,95	**52500**	18,95	**625**
SX E6.00 N 0.40	N	6	0,4	-SX6	20,44	**52600**	20,44	**626**

P	●	●
M	○	●
K	●	○
N		○
S		●
H		
O		

Insert SX

F	M	R
	◁	



-27P
H216T



70 349 ...

Designation	CW mm	RE mm	PDPT mm	for tool holder	EUR 1C/72	
SX E2.00 N 0.20	2	0,2	2,0	-SX2	18,83	**122**
SX E3.00 N 0.30	3	0,3	2,5	-SX3	20,15	**123**
SX E4.00 N 0.40	4	0,4	3,0	-SX4	21,33	**124**

P	
M	
K	○
N	●
S	
H	
O	○

Insert SX



F	M	R
	◁	



NEW

-M7
CTP1340

DRAGONSKIN



70 347 ...

Designation	CW mm	RE mm	PDPT mm	for tool holder	EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2	15,87	**62200**
SX E3.00 N 0.20	3	0,2	2,0	-SX3	16,89	**62300**
SX E4.00 N 0.30	4	0,3	2,5	-SX4	17,80	**62400**
SX E5.00 N 0.30	5	0,3	2,7	-SX5	18,95	**62500**
SX E6.00 N 0.40	6	0,4	3,0	-SX6	20,44	**62600**

P	●
M	●
K	○
N	○
S	●
H	
O	

Insert SX



F	M	R



NEW

-M8
CTP1340

DRAGONSKIN



Designation	CW mm	RE mm	PDPT mm	for tool holder	70 348 ... EUR 1C/72	
SX E2.00 N 0.20	2	0,2	1,5	-SX2	23,67	**62200**
SX E3.00 N 0.20	3	0,2	2,0	-SX3	25,44	**62300**
SX E4.00 N 0.30	4	0,3	2,5	-SX4	26,91	**62400**
SX E5.00 N 0.30	5	0,3	2,7	-SX5	28,65	**62500**
SX E6.00 N 0.40	6	0,4	3,0	-SX6	30,90	**62600**

P	●
M	●
K	○
N	○
S	●
H	
O	

Milling guide

Cutting data standard values	→ 191	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

15

TX slot milling and parting off cutter

▲ Note: slot milling and parting off cutters TX are cross-pitched and equipped with indexable inserts for both right-hand and left-hand version.
▲ ZEFP = number of inserts

Scope of supply:

slot milling and parting off cutter, 2 spare clamping screws and 1 Torx key

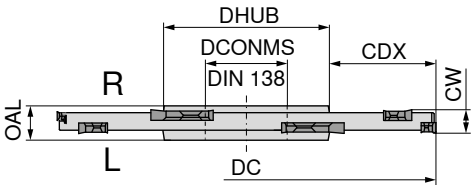

Designation	DC	CW	ZNF	CDX	DCONMS	DHUB	OAL	ZEFP	Insert	torque moment	50 730 ... EUR V5	
	mm	mm		mm	mm	mm	mm			Nm		
TX.STF.80X27.03.Z4	80	3	4	18,0	27	40	8	8	TX. 161702	0,7	624,60	**083**
TX.STF.100X32.03.Z5	100	3	5	25,0	32	46	8	10	TX. 161702	0,7	786,50	**103**
TX.STF.125X40.03.Z6	125	3	6	32,0	40	54	10	12	TX. 161702	0,7	859,40	**123**
TX.STF.160X40.03.Z8	160	3	8	50,0	40	54	10	16	TX. 161702	0,7	1.004,00	**163** 1)
TX.STF.80X27.04.Z4	80	4	4	18,0	27	40	8	8	TX. 162302	1,3	615,30	**084**
TX.STF.100X32.04.Z5	100	4	5	25,0	32	46	8	10	TX. 162302	1,3	775,80	**104**
TX.STF.125X40.04.Z6	125	4	6	32,0	40	54	10	12	TX. 162302	1,3	846,10	**124**
TX.STF.160X40.04.Z8	160	4	8	50,0	40	54	10	16	TX. 162302	1,3	990,70	**164** 1)
TX.STF.80X27.06.Z4	80	6	4	21,0	27	36	10	8	TX. 223202	2	404,50	**086**
TX.STF.80X22.06.Z4	80	6	4	22,0	22	33	10	8	TX. 223202	2	404,50	**080**
TX.STF.100X32.06.Z5	100	6	5	25,5	32	47	10	10	TX. 223202	2	481,30	**106**
TX.STF.125X40.06.Z6	125	6	6	32,5	40	58	10	12	TX. 223202	2	649,80	**136**
TX.STF.160X40.06.Z8	160	6	8	50,0	40	58	10	16	TX. 223202	2	862,10	**166** 1)
TX.STF.80X27.08.Z4	80	8	4	21,0	27	36	12	8	TX. 224302	2,8	404,50	**088**
TX.STF.100X32.08.Z5	100	8	5	25,5	32	47	12	10	TX. 224302	2,8	481,30	**108**
TX.STF.125X40.08.Z6	125	8	6	32,5	40	58	12	12	TX. 224302	2,8	649,80	**138**
TX.STF.160X40.08.Z8	160	8	8	50,0	40	58	12	16	TX. 224302	2,8	835,40	**168** 1)
TX.STF.80X27.10.Z4	80	10	4	21,0	27	36	12	8	TX. 225402	3	404,50	**090**
TX.STF.100X32.10.Z5	100	10	5	25,5	32	47	12	10	TX. 225402	3	481,30	**110**
TX.STF.125X40.10.Z6	125	10	6	32,5	40	58	14	12	TX. 225402	3	649,80	**140**
TX.STF.160X40.10.Z8	160	10	8	50,0	40	58	14	16	TX. 225402	3	862,10	**170** 1)

1) Without Through Coolant

TORX® blade

Key D

Molykote

Clamping screw

Torque screwdriver

Spare parts	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR V5		80 950 ... EUR Y7	
CW										
3	6,13	**032**	10,05	**109**	5,64	**303**	5,96	**858**	153,30	**191**
4	6,13	**033**	10,05	**110**	5,64	**303**	2,73	**218**	153,30	**191**
6	6,13	**036**	11,96	**113**	5,64	**303**	3,55	**101**	165,90	**192**
8	6,13	**037**	12,83	**114**	5,64	**303**	3,55	**135**	165,90	**192**
10	6,13	**037**	12,83	**114**	5,64	**303**	3,48	**146**	165,90	**192**

TX shell / slot milling and parting off cutter

▲ Note: slot milling and parting off cutters TX are cross-pitched and equipped with indexable inserts for both right-hand and left-hand version.
▲ ZEFP = number of inserts

Scope of supply:

slot milling and parting off cutter, 2 spare clamping screws and 1 Torx key

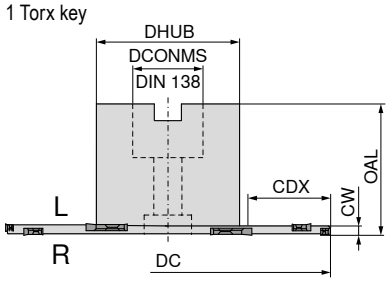



Designation	DC	CW	ZNF	CDX	DCONMS	DHUB	OAL	ZEFP	torque moment	Insert	50 734 ... EUR V5	
	mm	mm		mm	mm	mm	mm		Nm			
TX.ASF.100.R.03.Z5	100	3	5	25,0	27	48	50	10	0,7	TX. 161702	714,80	**300**
TX.ASF.125.R.03.Z6	125	3	6	37,5	27	48	50	12	0,7	TX. 161702	1.110,00	**225**
TX.ASF.160.R.03.Z8	160	3	8	44,0	40	70	50	16	0,7	TX. 161702	1.189,00	**260** 1)
TX.ASF.100.R.04.Z5	100	4	5	25,0	27	48	50	10	3,2	TX. 162302	704,20	**100**
TX.ASF.125.R.04.Z6	125	4	6	37,5	27	48	50	12	3,2	TX. 162302	1.017,00	**025**
TX.ASF.125.R.04.Z6	125	4	6	26,5	40	70	50	12	3,2	TX. 162302	990,70	**125**
TX.ASF.160.R.04.Z8	160	4	8	55,0	27	48	50	16	3,2	TX. 162302	1.240,00	**060** 1)
TX.ASF.160.R.04.Z8	160	4	8	44,0	40	70	50	16	3,2	TX. 162302	1.172,00	**160** 1)
TX.ASF.180.R.04.Z9	180	4	9	54,0	40	70	50	18	3,2	TX. 162302	1.356,00	**180** 1)
TX.ASF.200.R.04.Z10	200	4	10	64,0	40	70	50	20	3,2	TX. 162302	1.510,00	**200** 1)

1) Without Through Coolant

		Washer		TORX® blade		Clamping Screw		Key D		Molykote		Clamping screw		Torque screwdriver	
		70 950 ...		80 950 ...		70 950 ...		80 950 ...		70 950 ...		70 950 ...		80 950 ...	
Spare parts		EUR		EUR		EUR		EUR		EUR		EUR		EUR	
CW	**DCONMS**	V5		Y7		V5		Y7		2A/28		V5		Y7	
3	27	1,39	**221**	6,13	**032**	2,07	**219**	10,05	**109**	5,64	**303**	5,96	**858**	153,30	**191**
3	40	2,10	**222**	6,13	**032**	8,89	**220**	10,05	**109**	5,64	**303**	5,96	**858**	153,30	**191**
4	27	1,39	**221**	6,13	**033**	2,07	**219**	10,05	**110**	5,64	**303**	2,73	**218**	165,90	**192**
4	40	2,10	**222**	6,13	**033**	8,89	**220**	10,05	**110**	5,64	**303**	2,73	**218**	165,90	**192**

TX-L / TX-R

Designation	IC mm	D1 mm	CW mm
TX . 1617..	10	3,95	1,7
TX . 1623..	10	3,95	2,3
TX . 2232..	13	5,50	3,2
TX . 2243..	13	5,50	4,3
TX . 2254..	13	5,50	5,4

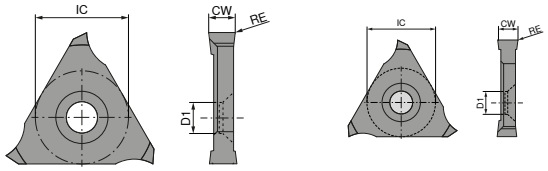

TX_L / TX_R

		CWX500		CWX500		CWK10		CWK10	
									
		TX-L		TX-R		TX-L		TX-R	
		50 382 ...		50 381 ...		50 382 ...		50 381 ...	
ISO	RE mm	EUR V5		EUR V5		EUR V5		EUR V5	
TX 161702	0,15	26,00	217	26,00	217				
TX 162302	0,15	25,71	223	25,71	223				
TX 223202	0,15	38,81	232	38,81	232				
TX 223202	0,20					34,38	532	34,38	532
TX 224302	0,15	39,21	243	39,21	243				
TX 224302	0,20					35,09	543	35,09	543
TX 225402	0,15	29,13	254	29,13	254				
TX 225402	0,20					24,99	554	24,99	554
P		●		●					
M		●		●					
K		●		●					
N		●		●		●		●	
S		○		○					
H									
O		○		○		○		○	

Milling guide

Cutting data standard values	→ 192	Technical Information	→ 193–198
Chip groove description and overview	→ 199–201	Grade description and overview	→ 202–208

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values

Index	CTEP210		TCM10		CTCP220		CTPP225		CTCP230		CTPP231		CTPP235		CTPP236	
	CERMET		CERMET													
	DRAGONSKIN												DRAGONSKIN			
	Cutting Material **hard** (v_c↑) → **tough** (v_c↓)															
	v_c (m/min)															
P.1.1	344		292		339	170	263	157	286	150	200	100	246	137	300	180
P.1.2	302		257		308	154	234	143	242	133	170	90	208	121	270	160
P.1.3	263		224		280	140	207	129	202	118	140	80	172	106	225	130
P.1.4	250		214		270	135	198	125	189	112	170	90	160	101	270	160
P.1.5	230		197		256	128	185	118	169	105	160	90	143	94	240	140
P.2.1	308		262		313	157	238	145	249	136	170	90	214	123	270	160
P.2.2	246		211		268	134	196	124	185	111	130	70	157	100	200	120
P.2.3	230		197		256	128	185	118	169	105	170	90	143	94	270	160
P.2.4	181		157		220	110	151	102	118	85	120	60	98	76	180	110
P.3.1					140	70	130	65	140	87	170	90	121	97	270	160
P.3.2					95	50	100	50	90	55	140	80	108	83	180	140
P.3.3					50	30	70	35	40	22	120	70	96	69	150	120
P.4.1					140	70	130	65	140	87	140	80	121	97	180	140
P.4.2					118	60	115	58	115	71	130	70	114	90	170	130
M.1.1											170	90	121	97	270	160
M.2.1													108	83		
M.3.1													117	93		
K.1.1									310	190	150	110	160	110	360	90
K.1.2	300		240						160	100	150	110	150	110	360	90
K.2.1	350		280						200	120	150	110	150	110	230	170
K.2.2	300		240						130	80	150	110	150	110	160	110
K.3.1	300		240						190	115					210	160
K.3.2									160	100					210	160
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1																
S.1.2																
S.2.1																
S.2.2																
S.2.3																
S.3.1																
S.3.2																
S.3.3																
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	CTPM225		CTCM235		CTPM240		CTPM241		CTPM245		CTCM245		CTN3105		CTL3215	
													CERAMIC		CBN	
	DRAGONSKIN															
	Cutting Material **hard** (v_c↑) → **tough** (v_c↓)															
	v_c (m/min)															
P.1.1	272	191	251	184	226	141	200	100	244	139	279	134				
P.1.2	231	163	210	152	188	126	170	90	207	124	242	119				
P.1.3	193	137	172	123	152	112	140	70	173	109	208	104				
P.1.4	180	129	160	113	140	107	170	90	161	104	196	99				
P.1.5	161	116	141	99	123	100	150	80	144	97	179	92				
P.2.1	237	167	217	157	194	128	170	90	212	126	247	121				
P.2.2	177	127	157	111	137	106	120	60	158	103	193	98				
P.2.3	161	116	141	99	123	100	170	90	144	97	179	92				
P.2.4	114	84	94	62	78	83	110	60	101	78	136	73				
P.3.1	148	121	136	115	126	105	210	100	155	107	175	122				
P.3.2	121	101	128	110	112	95	180	100	143	93	163	108				
P.3.3	95	81	120	105	98	85	160	90	131	79	151	94				
P.4.1	148	121	136	115	126	105	140	90	155	107	175	122				
P.4.2	134	111	132	113	119	100	130	80	149	100	169	115				
M.1.1	**148**	**121**	**136**	**115**	**126**	**105**	**210**	**100**	**155**	**107**	**175**	**122**				
M.2.1	**121**	**101**	**128**	**110**	**112**	**95**	**180**	**90**	**143**	**93**	**163**	**108**				
M.3.1	**140**	**115**	**134**	**114**	**121**	**102**	**210**	**100**	**152**	**103**	**172**	**118**				
K.1.1													**800**		**800**	
K.1.2													**600**		**600**	
K.2.1																
K.2.2															**450**	
K.3.1																
K.3.2																
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1								60				80				
S.1.2								60				70				
S.2.1								60				35				
S.2.2								60				25				
S.2.3								60				30				
S.3.1								60				80				
S.3.2								60				50				
S.3.3								60				40				
H.1.1																
H.1.2															150	
H.1.3																
H.1.4																
H.2.1															280	
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	CTCK215		CTPK220		CTPK221		CTPX715		H216T		CTWN215		CTC5240		CTCS245		CTP6215	
	DRAGONSKIN		DRAGONSKIN				DRAGONSKIN						DRAGONSKIN					
	Cutting Material **hard** (v_c↑) → **tough** (v_c↓)																	
	v_c (m/min)																	
P.1.1					190	120	240	130										
P.1.2					180	100	200	120										
P.1.3					150	80	170	100										
P.1.4					180	100	160	100										
P.1.5					170	90	140	90										
P.2.1					180	100	210	120										
P.2.2					140	80	150	100										
P.2.3					180	100	140	90										
P.2.4					130	80	100	70										
P.3.1					210	120	120	90										
P.3.2					160	90	100	80										
P.3.3					130	80	90	70										
P.4.1					210	120	120	90										
P.4.2					190	100	110	90										
M.1.1							120	100										
M.2.1							110	90										
M.3.1							120	100										
K.1.1	360	210	320	190	270	200	**320**	190	130	130	130	130					280	250
K.1.2	220	130	170	100	270	200	**170**	100	110	110	110	110					190	160
K.2.1	230	140	210	130	250	180	**210**	130	130	130	130	130					180	150
K.2.2	160	100	140	90	180	120	**140**	90	120	120	120	120					180	150
K.3.1	250	150	200	120	220	170	**200**	120	130	130	130	130					250	220
K.3.2	210	130	170	100	220	170	**170**	100	110	120	110	110					190	160
N.1.1								**1500**		**1500**		**1500**						
N.1.2								**1000**		**1000**		**1000**						
N.2.1								**1100**		**1100**		**1100**						
N.2.2								**1000**		**1000**		**1000**						
N.2.3								**280**		**280**		**280**						
N.3.1								**350**		**350**		**350**						
N.3.2								**350**		**350**		**350**						
N.3.3								**320**		**320**		**320**						
N.4.1								**320**		**320**		**320**						
S.1.1								60						**80**		**64**		
S.1.2								50						**70**		**56**		
S.2.1								30						**35**		**28**		
S.2.2								20						**25**		**20**		
S.2.3								20						**30**		**24**		
S.3.1								60						**80**		**64**		
S.3.2								40						**50**		**40**		
S.3.3								30						**40**		**32**		
H.1.1																	**50**	
H.1.2																	**40**	
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1							160	160	160	160	160	160						
O.1.2																		
O.2.1							240	240	240	240	240	240						
O.2.2																		
O.3.1																		

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

System MaxiMill 274-04/-09

Machining strategy

Helical plunging

$D_{max.}$ in mm = largest diameter for flat bottom hole
$D_{min.}$ in mm = smallest hole diameter for flat bottom surface
D_M = D_{max} – DCX and D_{min} – DCX

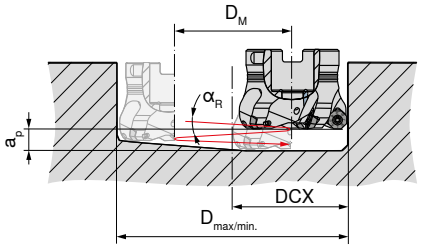



OF..04

DC mm	DCX mm	D_{max} mm	D_{min} mm	$\alpha_{R\,max}$ °
20	**25,5**	45	39	2,3
25	**30,6**	55	49	1,9
32	**37,6**	69	63	1,4
40	**45,7**	85	79	1,2
50	**55,7**	105	99	0,9
63	**68,7**	131	125	0,7
80	**85,7**	165	159	0,6
100	**105,7**	205	199	0,5
125	**130,7**	255	249	0,4

SF..09

DC mm	DCX mm	D_{max} mm	D_{min} mm	$\alpha_{R\,max}$ °
18,8	**27,4**	45,00	42,0	1,9
23,8	**32,5**	55,00	52,0	1,5
30,7	**39,5**	69,00	66,0	1,1
38,7	**47,6**	85,00	82,0	0,9
48,6	**57,6**	105,00	102,0	0,7
61,7	**70,6**	131,00	128,0	0,5
78,7	**87,5**	165,00	162,0	0,4
98,7	**107,5**	205,00	202,0	0,3
123,7	**132,5**	255,00	252,0	0,3

Axial ramping



OF..04

DC mm	DCX mm	x_{max} mm
20	**25,6**	2,5
25	**30,7**	2,5
32	**37,7**	2,5
40	**45,7**	2,5
50	**55,7**	2,5
63	**68,7**	2,5
80	**85,7**	2,5
100	**105,7**	2,5
125	**130,7**	2,5

SF..09

DC mm	DCX mm	x_{max} mm
18,8	**27,4**	3,7
23,8	**32,5**	3,5
30,7	**39,5**	3,2
38,7	**47,6**	3,1
48,6	**57,6**	3,1
61,7	**70,6**	3,0
78,7	**87,5**	2,9
98,7	**107,5**	2,7
123,7	**132,5**	2,7

Angled ramping



OF..04

DC mm	DCX mm	$\alpha_{R\,max}$ °
20	**25,6**	14,2
25	**30,7**	9,5
32	**37,7**	6,5
40	**45,7**	4,7
50	**55,7**	3,5
63	**68,7**	2,7
80	**85,7**	2,0
100	**105,7**	1,6
125	**130,7**	1,2

SF..09

DC mm	DCX mm	$\alpha_{R\,max}$ °
18,8	**27,4**	20,4
23,8	**32,5**	13,0
30,7	**39,5**	8,0
38,7	**47,6**	5,8
48,6	**57,6**	4,3
61,7	**70,6**	3,2
78,7	**87,5**	2,3
98,7	**107,5**	1,7
123,7	**132,5**	1,3

System MaxiMill 274-04

Starting Parameter

OF.. 04

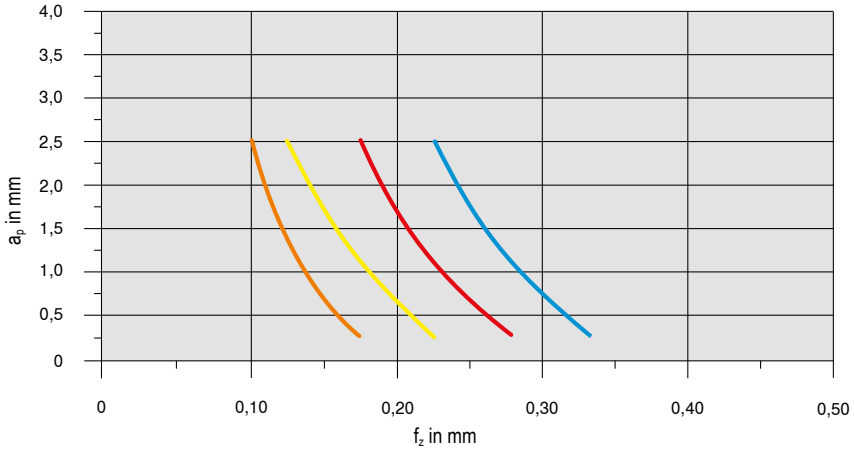

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**OFHT040305SN-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**OFHT040305SN-F50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**OFHT040305SN-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**OFHT040305SN-F50**	**CTC5240**	35	Emulsion

System MaxiMill 274-09

Starting Parameter



SF.. 09

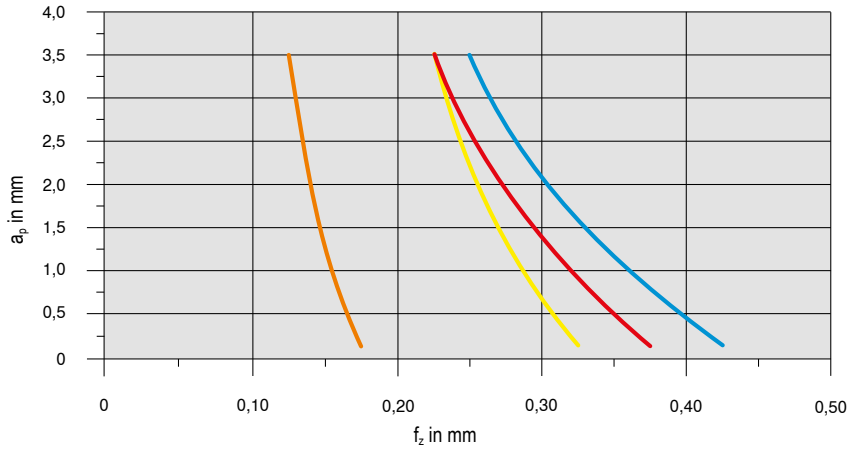

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SFKT0903AFSR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SFHT0903AFSR-F50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SFKT0903AFSR-R50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**SFHT0903AFSR-F50**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill 274-05/-12

Machining strategy

Helical plunging

$D_{max.}$ in mm = largest diameter for flat bottom hole
$D_{min.}$ in mm = smallest hole diameter for flat bottom surface
D_M = D_{max} – DCX and D_{min} – DCX

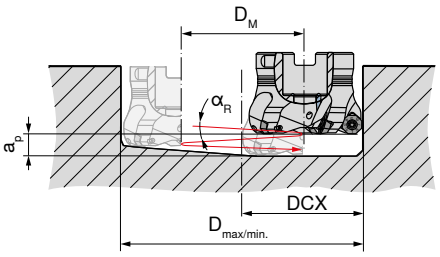



OF..05

DC mm	DCX mm	D_{max} mm	D_{min} mm	$\alpha_{R\,max}$ °
40	**48**	87	85	1,6
50	**58**	107	99	1,1
63	**71**	133	125	0,9
80	**88**	167	159	0,7
100	**107,9**	207	199	0,5
125	**132,9**	257	249	0,4
160	**167,9**	327	325	0,35

SF..12

DC mm	DCX mm	D_{max} mm	D_{min} mm	$\alpha_{R\,max}$ °
47,0	**61,0**	107	105	0,5
59,9	**74,0**	133	131	0,4
76,9	**90,9**	167	165	0,3
96,9	**110,9**	207	205	0,25
121,9	**135,9**	257	255	0,2

Axial ramping



OF..05

DC mm	DCX mm	X_{max} mm
40	**48**	2,5
50	**58**	2,2
63	**71**	1,9
80	**88**	1,8
100	**107,9**	1,1
125	**132,9**	1,4
160	**167,9**	1,1

SF..12

DC mm	DCX mm	X_{max} mm
47,0	**61,0**	3,4
59,9	**74,0**	3,2
76,9	**90,9**	3,0
96,9	**110,9**	2,5
121,9	**135,9**	2,6

Angled ramping



OF..05

DC mm	DCX mm	$\alpha_{R\,max}$ °
40	**48**	6,5
50	**58**	3,2
63	**71**	2,0
80	**88**	1,5
100	**107,9**	0,7
125	**132,9**	0,7
160	**167,9**	0,4

SF..12

DC mm	DCX mm	$\alpha_{R\,max}$ °
47,0	**61,0**	4,9
59,9	**74,0**	3,4
76,9	**90,9**	2,4
96,9	**110,9**	1,6
121,9	**135,9**	1,3

System MaxiMill 274-05

Starting Parameter

OF.. 05

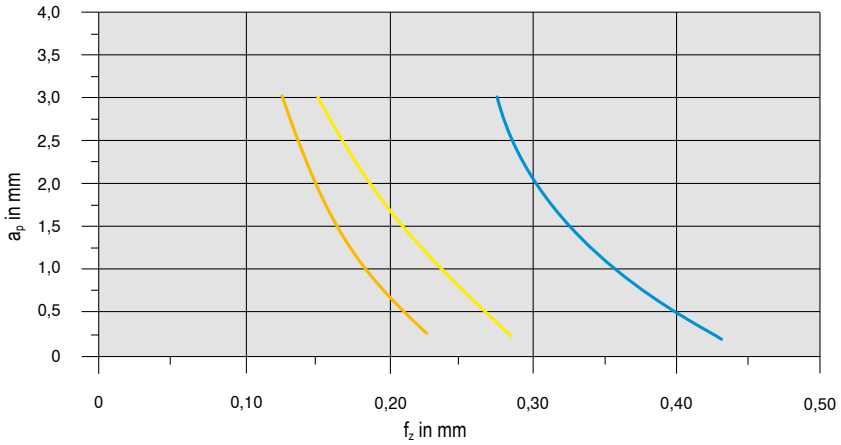

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**OFHT050410SN-M50**	**CTCP230**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**OFHT050410SN-F50**	**CTPM240**	180	Dry
Heat-resistant	**S.2.2**	Inconel 718	**OFHT050410SN-F50**	**CTC5240**	35	Emulsion

System MaxiMill 274-12

Starting Parameter



SF.. 12

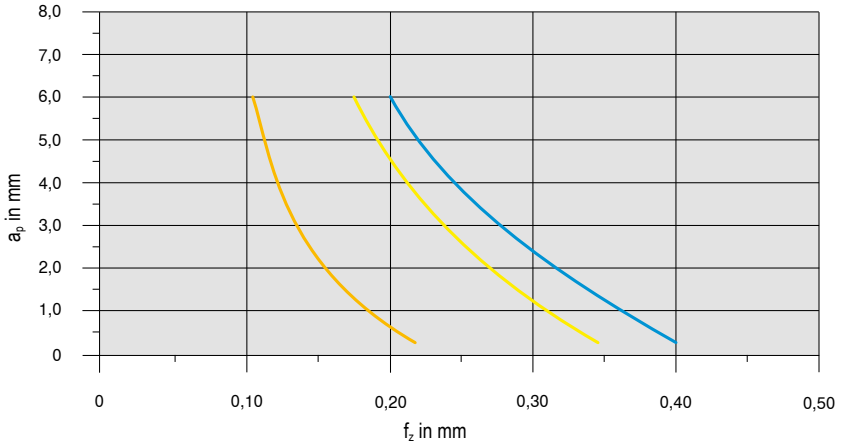

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SFKT1204AFSR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SFKT1204AFSR-M50**	**CTPM240**	180	Dry
Heat-resistant	**S.2.2**	Inconel 718	**SFHT1204AFER-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

MaxiMill 271-12 system

Starting Parameter



SOHU 12

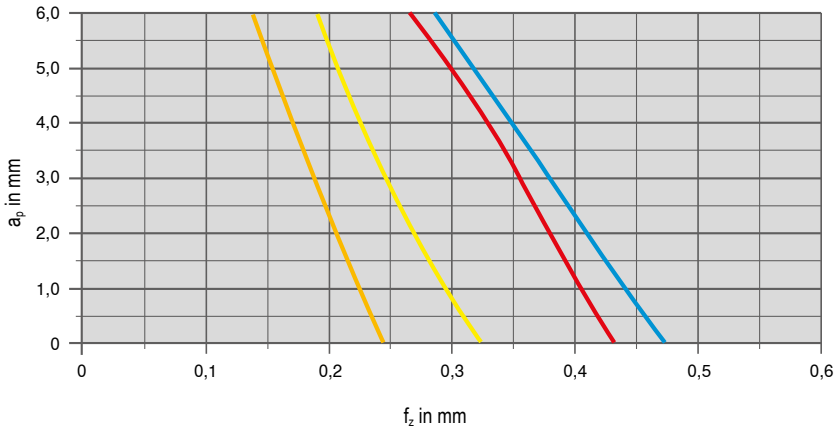

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SOHU 1204ABSR-M50**	**CTPP230**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SOHU 1204ABSR-M50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SOHU 1204ABSR-R50**	**CTCK215**	300	Dry
Heat-resistant	**S.2.2**	Inconel 718	**SOHU 1204ABSR-F50**	**CTC5240**	30	Emulsion

System MaxiMill 271-17

Starting Parameter



SAKU 17

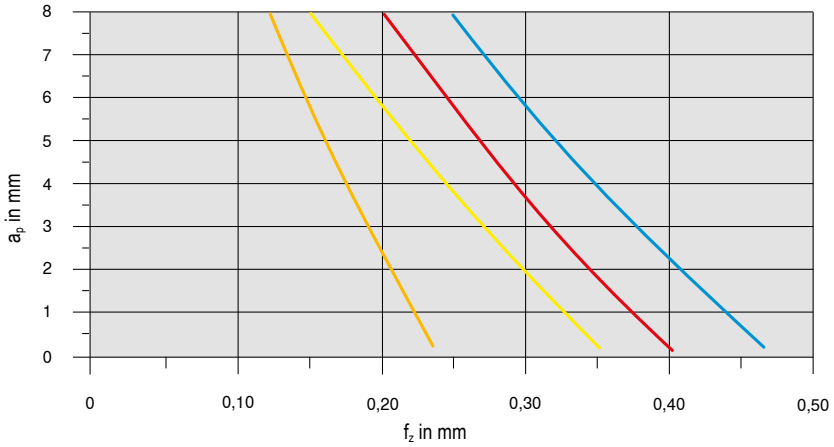

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SAKU 1706ABSR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SAKU 1706ABSR-F50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SAKU 1706ABSR-R50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**SAKU 1706ABSR-F50**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

MaxiMill 273-06 system

Starting Parameter

OAKU 06

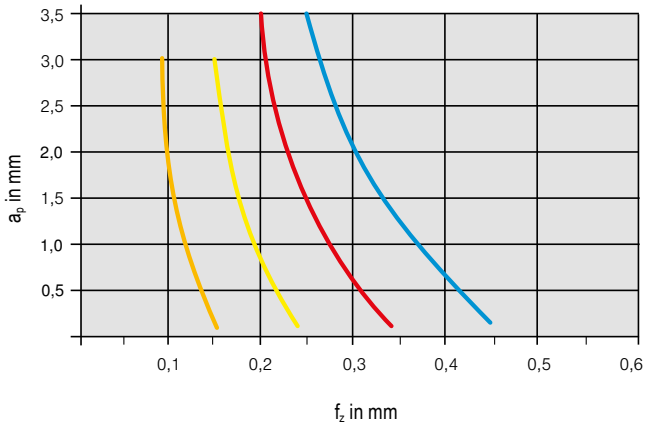

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**OAKU 060508SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**OAKU 060508SR-F50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**OAKU 060508SR-R50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**OAKU 060508ER-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

MaxiMill 273-08 system

Starting Parameter

ONKU 08

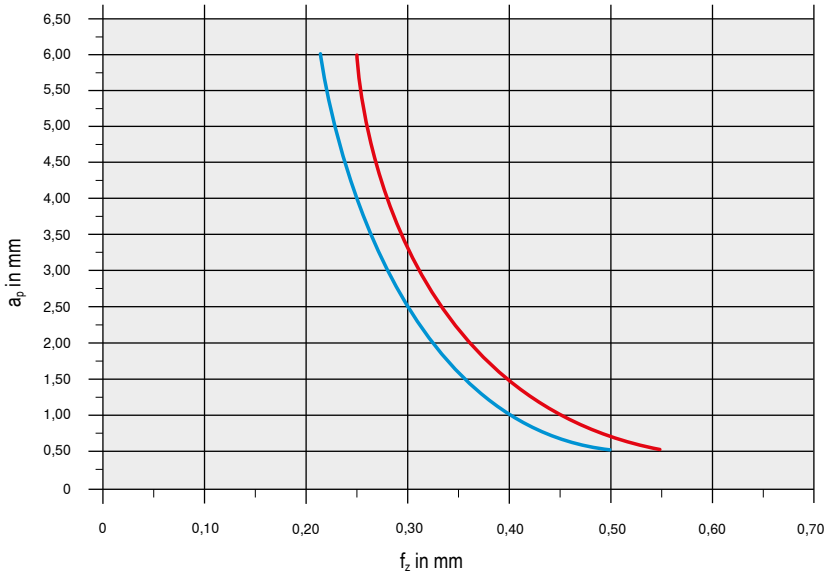

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**ONKU 080608SR-M50**	**CTPP235**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**ONKU 080608SR-R50**	**CTCK215**	250	Dry

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

MaxiMill 270 system

Machining strategy

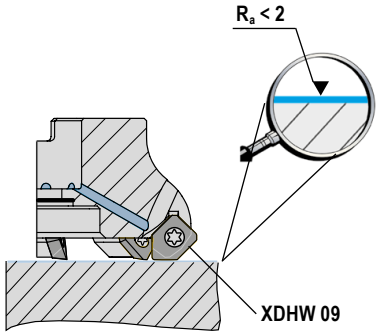

Finish milling with trailing edge inserts

Two Masterfinish inserts are mounted in each 125mm head

Steel	SDNT	0903AESN-29	CTPP235	+	XDHW	0903AESN CTPP235
	SDNT	0903AESN-29	CTCP230	+	XDHW	0903AESN CTCP230
	SDHT	0903AESN-33	CTCP230	+	XDHW	0903AESN CTCP230
	SDHW	0903AESN	TCM10	+	XDHW	0903AESN TCM10
Cast iron	SDNT	0903AESN-31	CTCK215	+	XDHW	0903AEEN CTCK215
Non-ferrous metals	SDHT	0903AEFN-ALP	-27P H216T	+	XDHW	0903AEFN -27P H216T

Helical plunging (without pilot hole)



C 270-09

DC mm	D_{w-min} mm	$B_{1\,max}$ mm	D_{w-max} mm	$B_{2\,max}$ mm
6	14,4	1,5	19,0	1,5
12	28,5	1,5	31,0	1,5
16	36,5	1,5	39,0	1,5
20	44,5	1,5	47,0	1,5
25	54,5	1,5	57,0	1,5
32	68,5	1,5	71,0	1,5



A 270-09

DC mm	D_{w-min} mm	$B_{1\,max}$ mm	D_{w-max} mm	$B_{2\,max}$ mm
32	68,5	1,5	71,0	1,5
40	84,5	1,5	87,0	1,5
50	104,5	1,5	107,0	1,5
63	130,5	1,5	133,0	1,5
80	164,5	1,5	167,0	1,5
100	204,5	1,5	207,0	1,5
125	254,5	1,5	257,0	1,5
160	324,5	1,5	327,0	1,5

System MaxiMill 270-12

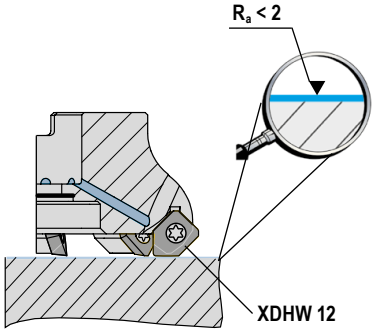

Finish milling with trailing edge inserts

Two Masterfinish inserts are mounted in each 125mm head

Steel	SDMT	1204AESN-29R	CTPP235	+	XDHW	1204AESN CTPP235
	SDMT	1204AESN-29R	CTCP230	+	XDHW	1204AESN CTCP230
	SDHW	1204AESN-R	TCM10	+	XDHW	1204AESN TCM10
Cast iron	SDMT	1204AEEN-31	CTCK215	+	XDHW	1204AEEN CTCK215
	SDHW	1204AESN-R	CTCK215	+	XDHW	1204AEEN CTCK215
Non-ferrous metals	SDHT	1204AEFN-ALP	-27P H216T	+	XDHW	1204AEFN -27P H216T

Helical plunging (without pilot hole)

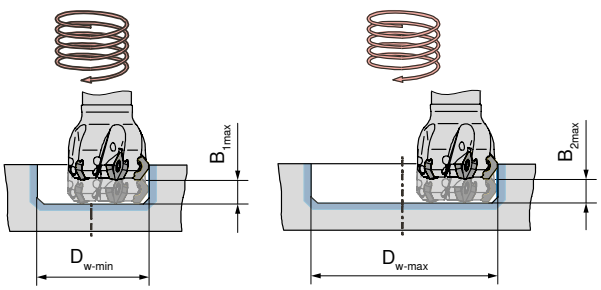

DC mm	D_{w-min} mm	$B_{1\,max}$ mm	D_{w-max} mm	$B_{2\,max}$ mm
32	74,5	1,5	78,0	1,5
40	90,5	1,5	94,0	1,5
50	110,5	1,5	114,0	1,5
63	136,5	1,5	140,0	1,5
80	170,5	1,5	174,0	1,5
100	210,5	1,5	214,0	1,5
125	260,5	1,5	264,0	1,5
160	330,5	1,5	334,0	1,5

From v_c > 400 m/min, the tool must be balanced!

MaxiMill HEC 11 / HEC 12 system

4 cutting edges per installation position

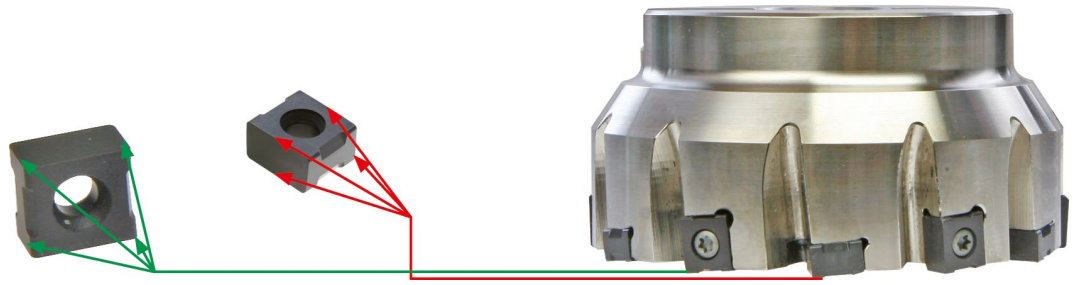

Correct assembly of standard and trailing edge inserts

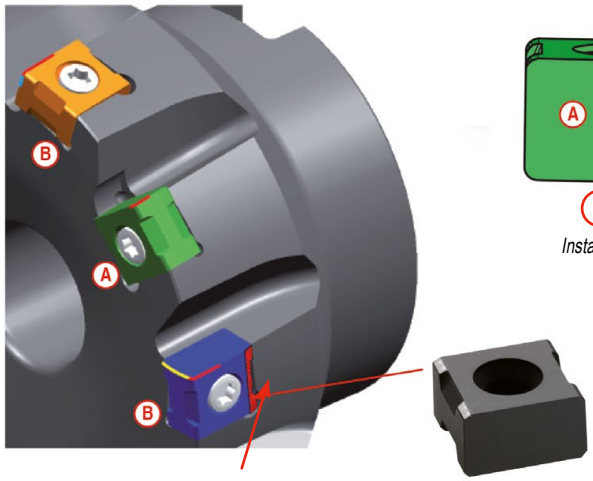

Marking for the correct assembly



Installation position



Face machining insert — B
Insert main cutting edge — A B
Trailing edge facet — B

Adjust the tools in axial direction

- ▲ Install the wedge into the cutter body and lightly clamp the clamping screw so as not to clamp. — 1
- ▲ Install the inserts as shown and tighten to 1,0 Nm torque. — 2
- ▲ Using pre-setting equipment, mark the highest cutting edge. — 1
- ▲ With small adjustments of the setting screw set all cutting edges to the same height by 0,005 mm or better. — 1
- ▲ Clamp insert with 3,2 Nm torque. — 2

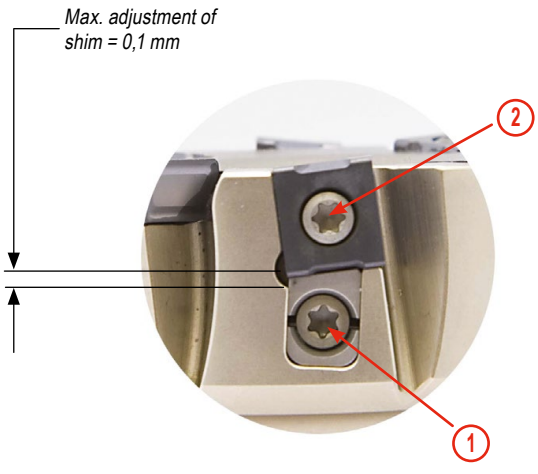

Average chip thickness [h_m] – the approach

Face milling

1 Select appropriate average chip thickness [h_m] for the steel from the table.

Material	Tensile strength N/mm²	h_m mm
for steel	...–800	0,2
for steel	800–1000	0,18
for steel	1000–1200	0,16
for steel	1200–...	0,14
for stainless steel	... –750	0,21
for stainless steel	750–900	0,19
for stainless steel	900–1150	0,17
for stainless steel	1150– ...	0,15

2 Select the corrected feed rate value from the table based on the appropriate chip thickness [h_m] and depth of cut [a_e].

h_m mm	Corrected feed value f_z for h_m			
0,20	0,40 **	0,40 **	0,33	0,28
0,18	0,40 **	0,40 **	0,29	0,25
0,16	0,40 **	0,36	0,26	0,23
0,14	0,36	0,31	0,23	0,20
0,21	0,40 **	0,40 **	0,34	0,30
0,19	0,40 **	0,40 **	0,31	0,27
0,17	0,40 **	0,38	0,28	0,24
0,15	0,39	0,34	0,24	0,21
a_e =	**0,3 x DC**	**0,4 x DC**	**0,75 x DC**	**1 x DC**

** f_z > 0,4 mm: Danger of an open space contact

MaxiMill 491-09 system

Starting Parameter



SNHU 09

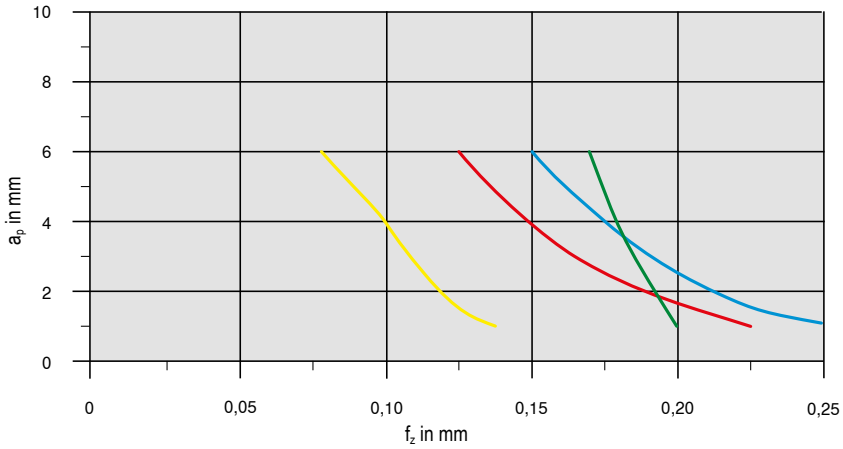

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SNHU09T308SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SNHU09T308SR-F50**	**CTPM240**	180	Emulsion
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SNHU09T308SR-R50**	**CTCK215**	250	Dry
Non-ferrous metals	**N.1.2**	AlMgSi1	**SNHU09T308FR-F10**	**CTWN215**	500	Emulsion

MaxiMill 491-12 system

Starting Parameter



SNHU 12

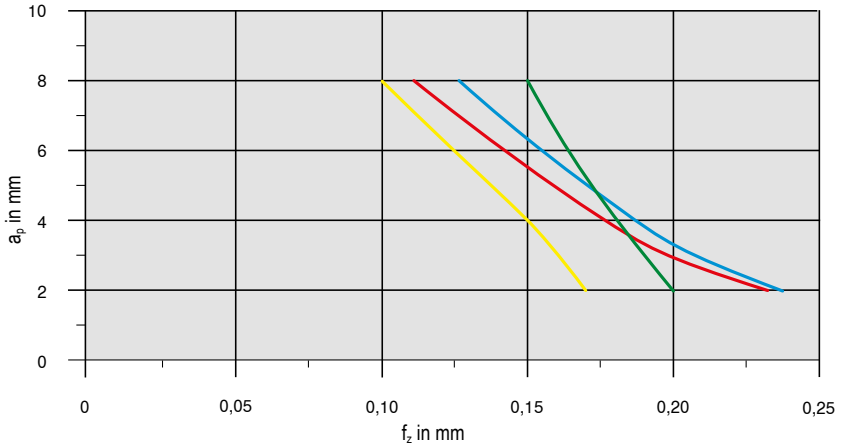

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SNHU120408SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SNHU120408SR-F50**	**CTPM240**	180	Emulsion
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SNHU120408SR-R50**	**CTCK215**	250	Dry
Non-ferrous metals	**N.1.2**	AlMgSi1	**SNHU120408FR-F10**	**CTC5240**	500	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill 211-07

Machining strategy

Helical plunging

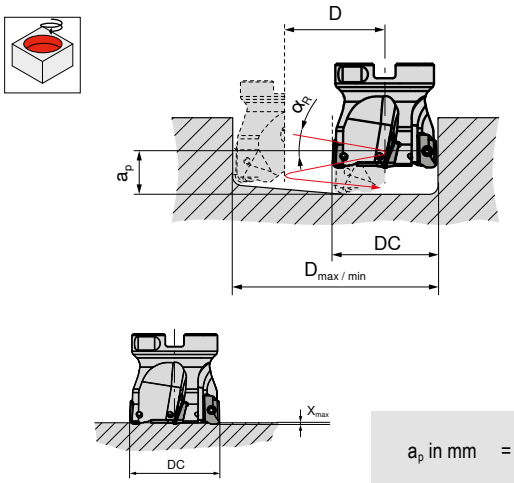

a_p in mm = $D * \pi * \tan \alpha_R$

DC mm	D_{max} / RE 0,4 mm	D_{min} mm	$\alpha_{R\,max}$ °
10	19	13	5,5
12	23	17	6,0
16	31	25	3,0
20	39	33	2,0
25	49	43	1,5
32	63	57	1,2
40	79	73	0,8
50	99	93	0,7

DC mm	D mm	$\alpha_{R\,max\,360°}$ °
10	13	5,5
12	17	6,0
16	25	3,0
20	33	2,0
25	43	1,5
32	57	1,2
40	73	0,8
50	93	0,7

Axial ramping



DC mm	X_{max} mm
10	0,8
12	0,8
16	0,8
20	0,8
25	0,8
32	0,8
40	0,8
50	0,8

$D_{max.}$ in mm = largest diameter for flat bottom hole
$D_{min.}$ in mm = smallest hole diameter for flat bottom surface

Angled ramping



DC mm	α °
10	11,0
12	7,9
16	4,3
20	3,0
25	2,5
32	1,6
40	1,2
50	1,0

$D = D_{max} - DC / D_{min} - DC$

Starting Parameter



XDKT 07

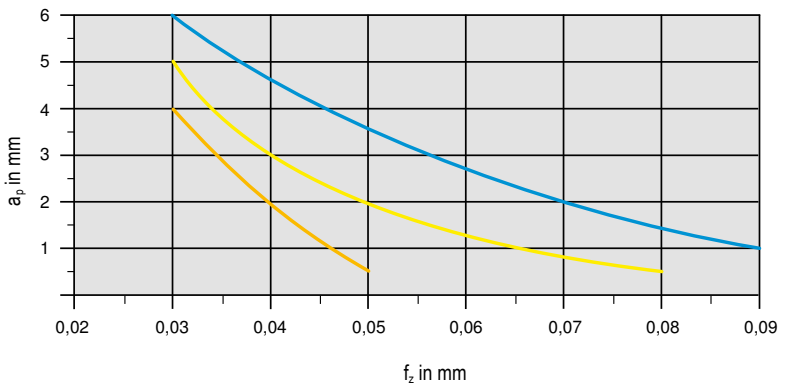

Material			Inserts		v_c in m/min	Cooling
Steel	P.2.2	40CrMnMoS 8-6	XDKT070308SR-M50	CTCP230	200	Dry
Stainless steel	M.1.1	X6CrNiMoTi 1712 2	XDKT070308SR-F50	CTPM240	180	Dry
Heat-resistant	S.2.2	Inconel 718	XDKT070308ER-F50	CTC5240	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill 211-11

Machining strategy



1 Helical plunging



2 Axial ramping



3 Angled ramping

DC mm	1 Helical plunging RE = 0,8 mm		2 Axial ramping X_{max}	3 Angled ramping α_R
12	α_R	16 °	1,3 mm	18 °
	$D_{max.}$	21 mm		
	$D_{min.}$	14 mm		
16	α_R	9,5 °	1,5 mm	10,8 °
	$D_{max.}$	29 mm		
	$D_{min.}$	21 mm		
20	α_R	7 °	2,0 mm	9,8 °
	$D_{max.}$	37 mm		
	$D_{min.}$	30 mm		
25	α_R	4,5 °	2,0 mm	7,5 °
	$D_{max.}$	47 mm		
	$D_{min.}$	40 mm		
32	α_R	3,2 °	1,0 mm	4,8 °
	$D_{max.}$	61 mm		
	$D_{min.}$	53 mm		
40	α_R	2,2 °	1,6 mm	2,9 °
	$D_{max.}$	77 mm		
	$D_{min.}$	72 mm		
50	α_R	1,7 °	1,6 mm	2,2 °
	$D_{max.}$	98 mm		
	$D_{min.}$	93 mm		
63	α_R	1,5 °	1,6 mm	1,8 °
	$D_{max.}$	123 mm		
	$D_{min.}$	116 mm		
80	α_R	1,0 °	1,6 mm	1,4 °
	$D_{max.}$	157 mm		
	$D_{min.}$	153 mm		
100	α_R	0,8 °	1,6 mm	1,1 °
	$D_{max.}$	197 mm		
	$D_{min.}$	193 mm		
125	α_R	0,6 °	1,6 mm	0,8 °
	$D_{max.}$	247 mm		
	$D_{min.}$	243 mm		

DC mm	Maximum speed related to projection length n_{max} in min^{-1} l_a = 1–2 x Ø mm	l_a = 2,5 x Ø mm	l_a = 3 x Ø mm	l_a = 4 x Ø mm	l_a = 5 x Ø mm
12	55000	51500	47000	42000	37000
16	42000	38500	34100	28900	24200
20	36900	33000	28500	23900	19500
25	33200	29000	24400	19900	15400
32	30200	26000	20900	16600	11900
40	27700	23000	18000	13500	9000
50	25400	20400	15400	10800	6100
63	23300	18300	12900	8300	3700
80	21300	16100	10600	5800	
100	19600	14100	8400		
125	17900	12800	7600		

$D_{max.}$ in mm = largest diameter for flat bottom hole

$D_{min.}$ in mm = Smallest diameter for flat bottom surface

a_p in mm = D x π x tan (α_R) = Pitch

l_s in mm = Overhang length

Starting Parameter



XDKT 11

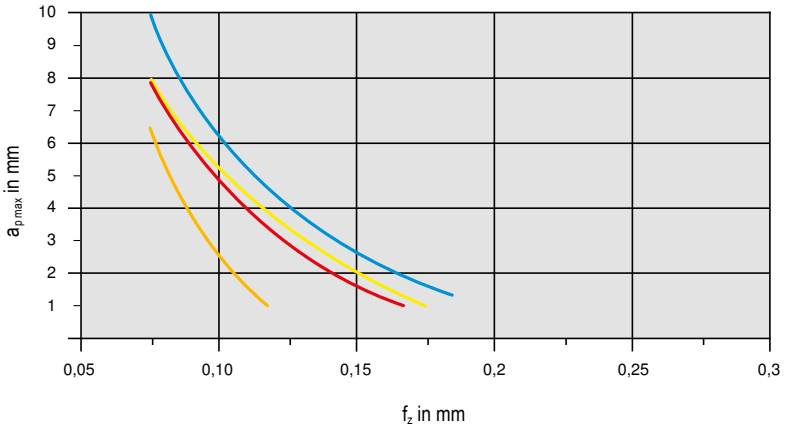

Material			Inserts		v_c in m/min	Cooling
Steel	P.2.2	40CrMnMoS 8-6	XDKT11T308SR-M50	CTCP230	200	Dry
Stainless steel	M.1.1	X6CrNiMoTi 1712 2	XDKT11T308SR-F50	CTPM240	180	Dry
Cast iron	K.1.1	EN-GJL-250 (GG25)	XDKT11T308SR-R50	CTCK215	250	Dry
Heat-resistant	S.2.2	Inconel 718	XDKT11T308ER-F50	CTC5240	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

15

System MaxiMill 211-15

Machining strategy



1 Helical plunging



2 Axial ramping



3 Angled ramping

DC mm		1 Helical plunging RE = 0,8 mm	2 Axial ramping X_{max}	3 Angled ramping α_R
25	α_R	7,5 °	2,7 mm	9,5 °
	$D_{max.}$	48 mm		
	$D_{min.}$	37 mm		
32	α_R	5 °	2,5 mm	6,8 °
	$D_{max.}$	62 mm		
	$D_{min.}$	47 mm		
40	α_R	3,2 °	2,5 mm	5,1 °
	$D_{max.}$	78 mm		
	$D_{min.}$	63 mm		
50	α_R	2,5 °	2,5 mm	2,5 °
	$D_{max.}$	98 mm		
	$D_{min.}$	86 mm		
63	α_R	1,5 °	2,5 mm	2,5 °
	$D_{max.}$	124 mm		
	$D_{min.}$	111 mm		
80	α_R	1,3 °	2,5 mm	2,0 °
	$D_{max.}$	158 mm		
	$D_{min.}$	147 mm		
100	α_R	1,1 °	2,5 mm	1,5 °
	$D_{max.}$	198 mm		
	$D_{min.}$	190 mm		
125	α_R	0,9 °	2,5 mm	0,9 °
	$D_{max.}$	248 mm		
	$D_{min.}$	240 mm		
160	α_R	0,6 °	2,5 mm	0,7 °
	$D_{max.}$	318 mm		
	$D_{min.}$	310 mm		

Maximum speed related to projection length n_{max} in min^{-1}			
DC mm	l_a = 2 x Ø mm	l_a = 3 x Ø mm	l_a = 5 x Ø mm
25	26560	19520	13320
32	24160	16720	9520
40	22160	14400	7200
50	20320	12320	4880
63	18640	10320	2960
80	17040	8480	
100	15680	6720	
125	14320		
160	13200		

$D_{max.}$ in mm = largest diameter for flat bottom hole

$D_{min.}$ in mm = Smallest diameter for flat bottom surface

a_p in mm = D x π x tan (α_R) = Pitch

l_a in mm = Overhang length

Starting Parameter



XDKT 15

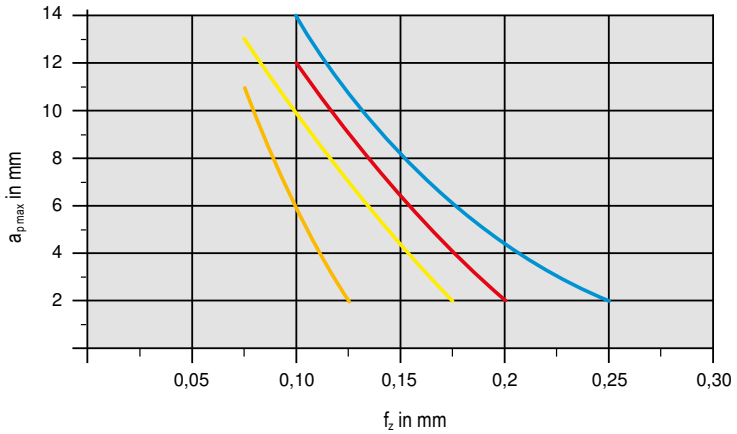

Material			Inserts		v_c in m/min	Cooling
Steel	P.2.2	40CrMnMoS 8-6	XDKT150508SR-M50	CTCP230	200	Dry
Stainless steel	M.1.1	X6CrNiMoTi 1712 2	XDKT150508SR-F50	CTPM240	180	Dry
Cast iron	K.1.1	EN-GJL-250 (GG25)	XDKT150508SR-R50	CTCK215	250	Dry
Heat-resistant	S.2.2	Inconel 718	XDKT150508ER-F40	CTC5240	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill 211-20

Machining strategy

Helical plunging

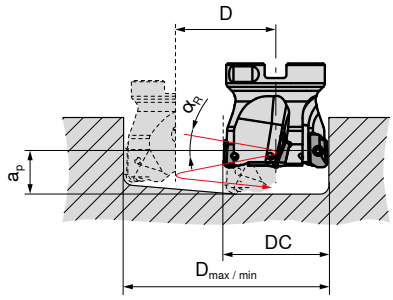

DC mm	D_{max} / RE 0,4 mm	D_{min} mm	$\alpha_{R\,max}$ °
63	124	107	2,2
80	158	143	1,7
100	198	183	1,3

a_p in mm $= D * \pi * \tan \alpha_R$

Axial ramping



DC mm	X_{max} mm
63	2,0
80	2,0
100	2,0

Angled ramping



DC mm	α °
63	2,2
80	1,7
100	1,3

$D = D_{max} - DC / D_{min} - DC$

$D_{max.}$ in mm = largest diameter for flat bottom hole
$D_{min.}$ in mm = smallest hole diameter for flat bottom surface

Starting Parameter



XDKT 20

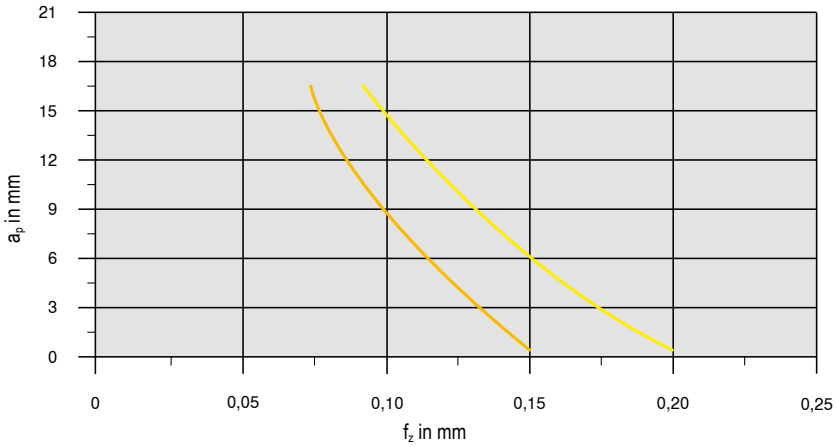

Material			Inserts		v_c in m/min	Cooling
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**XDKT200708ER-F40**	**CTPM240**	180	Dry
Heat-resistant	**S.2.2**	Inconel 718	**XDKT200708ER-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill 490-09

Machining strategy

System MaxiMill 490-09 is not suitable for plunging!

Starting Parameter

SDNT 09

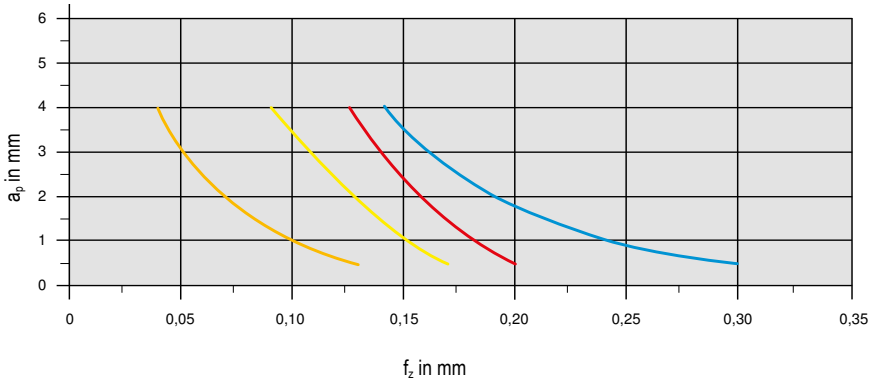

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SDNT09T308SR-29**	**CTCP230**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SDNT09T308SR-33**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SDNT09T308SR-31**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**SDNT09T308ER-M31**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

MaxiMill 490-09 adjustable angle milling cutter – dimensions

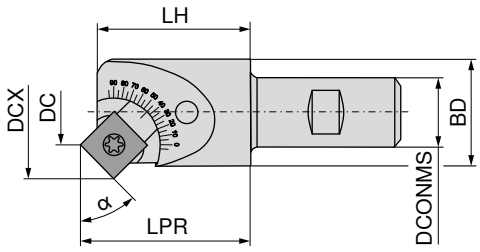

Constant dimensions			Angle-dependent dimensions*			
BD	DCONMS	LH	α	DC*	DCX	LPR*
18,6	16	32	**0°**	**9,35/1,60****	**20,14**	**33,07**
			5°	3,81	20,82	33,40
			10°	4,59	21,44	33,69
			15°	**5,42**	**21,98**	**33,95**
			20°	6,30	22,45	34,17
			25°	7,23	22,85	34,35
			30°	**8,18**	**23,16**	**34,49**
			35°	9,15	23,39	34,58
			40°	10,14	23,53	34,64
			45°	**11,13**	**23,59**	**34,65**
			50°	12,12	23,56	34,61
			55°	13,09	23,44	34,54
			60°	**14,04**	**23,24**	**34,42**
			65°	14,96	22,96	34,26
			70°	15,84	22,60	34,06
			75°	**16,68**	**22,16**	**33,83**
			80°	17,46	21,65	33,56
			85°	18,19	21,07	33,25
			90°	**10,07/1,90****	**20,44**	**32,93**

* Tangential cutting point at deepest engagement point
** Smallest diameter in centre

System MaxiMill 490-12

Machining strategy

Helical plunging (without pilot hole)

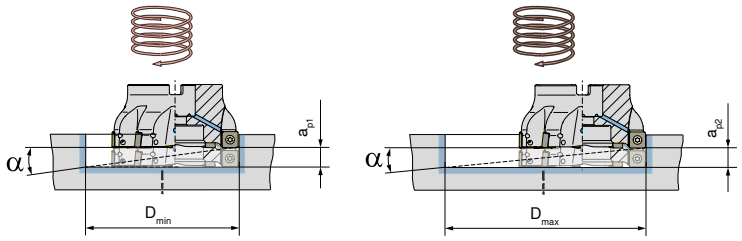

$$B = (D_W - DC) \times \pi \times \tan \alpha$$

D_w = Diameter of the hole to be produced
DC = Nominal diameter of the milling tool
B = Axial feed to 360° circular movement

DC mm	D_{min} mm	a_{p1} mm	D_{max} mm	a_{p2} mm	α °
50	77	2,5	98	4,8	2,0
63	103	1,8	124	3,0	1,0
80	137	2,1	158	3,0	0,8
100	177	2,1	198	2,9	0,6
125	227	1,8	248	2,4	0,4

Starting Parameter

SDMT 12

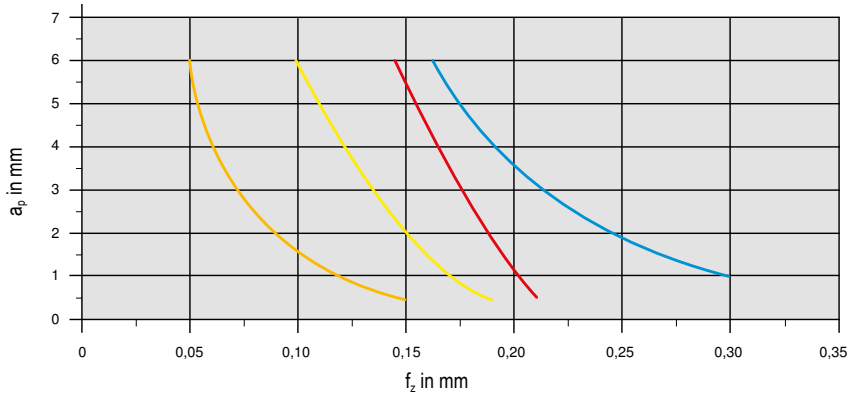

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**SDMT1205ZZSN-29**	**CTCP230**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**SDMT120512SR-33**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**SDMT1205ZZSN-31**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**SDMT120508ER-M31**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

MaxiMill 490-12 adjustable angle milling cutter – dimensions

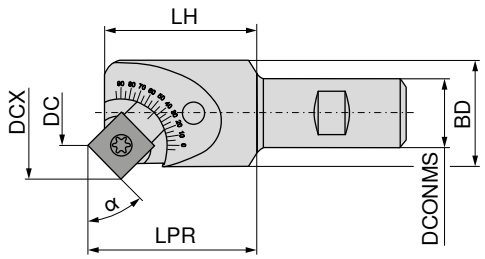

Constant dimensions			Angle-dependent dimensions*			
BD	DCONMS	LH	α	DC*	DCX	LPR*
25	20	37	**0°**	**25,07/1,12****	**26,64**	**38,36**
			5°	3,72	27,61	38,79
			10°	4,84	28,48	39,21
			15°	**6,03**	**29,25**	**39,58**
			20°	7,27	29,92	39,90
			25°	8,57	30,48	40,16
			30°	**9,91**	**30,92**	**40,37**
			35°	11,28	31,25	40,51
			40°	12,67	31,45	40,60
			45°	**14,08**	**31,54**	**40,62**
			50°	15,48	31,50	40,58
			55°	16,86	31,34	40,48
			60°	**18,23**	**31,06**	**40,33**
			65°	19,56	30,66	40,11
			70°	20,85	30,15	39,83
			75°	**22,08**	**29,52**	**39,51**
			80°	23,26	28,79	39,12
			85°	24,35	27,95	38,69
			90°	**25,37/1,42****	**26,94**	**38,21**

* Tangential cutting point at deepest engagement point
** Smallest diameter in centre

HSC/HPC machining

Safety advice

Suitability of the tool for HSC machining

HSC tools from CERATIZIT have been specially developed for this machining strategy and guarantee maximum operational reliability.

Observation of safety precautions of the machine manufacturer

Make sure that all safety precautions of the machine-manufacturer are observed (e.g.: closed machine guards).



Suitability of the adapters for HSC machining

According to the milling situation, choose the optimum tool/clamping device combination. For high speed milling applications it is necessary to dynamically balance tool and tool adapter together (see ISO 1940 directives).

Mounting the indexable insert with centrifugal force protection

Insert clamping: EURO-patent EP 1083017A1
Make sure that the insert pocket is cleaned and the threading bore for the clamping screw is in good condition.
Check the axial and radial contact points of the insert in the pocket.
The clamping screws for positive insert clamping must be tightened with a torque of (XDHT11 = 1,8 Nm; XDH.19 = 6,0 Nm).



Optimum mounting of HSC milling cutters (DC = Ø 40–63) to milling arbors using power screw

The power screw guarantees a stable connection of tool and milling adapter and is easy to use.



Power Screw

Maximum admissible number of revolutions

Please note the maximum number of revolutions stated on the tool. This number is exclusively valid for the specific tool and must be adapted according to the selected tool adapter, total overhang length and the respective machining situation.

Optimum application range of the tool (a_e, a_p, f_z, n)

In order to guarantee productive milling, please observe the recommendations regarding the cutting parameters.

Failure to comply with these safety regulations automatically excludes CERATIZIT from any liability

System MaxiMill HSC-11

Cutting data standard values

Workpiece material		Treatment / alloy		VDI 3323 Group	Hardness HB	H216T (CTWN215) v_c in m/min (dry)	H216T (CTWN215) v_c in m/min (lubricated)
N	Aluminum alloys	non hardenable		21	60		660–9840
		hardenable		22	100		660–6560
	Cast aluminum alloy	non hardenable	< 12% Si	23	80		660–6560
		hardenable	< 12% Si	24	90		660–5900
		non hardenable	> 12% Si	25	130		660–3280
	Copper and copper alloys (Bronze, Brass)		Free-cutting steel alloy (1% Pb)	26			660–1970
			brass, red bronze	27	90	820–3280	820–3280
			bronze	28	100		490–1310
			lead-free copper and electrolytic copper	29	100		980–2620
O	Non metal materials		Duroplastics	29		260–3280	260–3280
			Fibre-reinforced plastics	29		230–1640	230–1640
			hard rubber	30		100–260	100–260

= full lubricant

= Minimum quantity lubrication

= dry machining

15

System MaxiMill HSC-11

Machining strategy

Axial ramping



DC mm	11 RE 0,2–4,0 $x_{max.}$ mm
16	1,70
18	2,11
19	2,24
20	2,39
22	2,70
25	2,55
32	2,40
40	2,28
50	2,26
63	2,10
80	1,75
100	1,79

Angled ramping

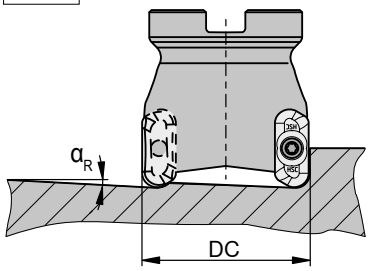

DC mm	α_R °
16	18,8
18	16,3
19	15,3
20	14,8
22	13,8
25	10,3
32	6,8
40	4,8
50	3,5
63	2,5
80	1,8
100	1,3

Milling strategy for roughing and finishing

With maximum chip volume

Indexable Insert	RE mm	a_p mm	$a_{p\,max.}$ mm
XDHT 11T302FR-ALP	0,2	10	9,8
XDHT 11T304FR-ALP	0,4	10	9,6
XDHT 11T308FR-ALP	0,8	10	9,2
XDHT 11T312FR-ALP	1,2	10	8,8
XDHT 11T316FR-ALP	1,6	10	8,4
XDHT 11T320FR-ALP	2,0	10	8,0
XDHT 11T325FR-ALP	2,5	10	7,5
XDHT 11T332FR-ALP	3,2	10	6,8
XDHT 11T340FR-ALP	4,0	10	6,0
XDHT 11T350FR-ALP	5,0	10	5,0

With maximum side wall quality

Indexable Insert	RE mm	$a_{p\,max.}$ mm
XDHT 11T302FR-ALP	0,2	7,8
XDHT 11T304FR-ALP	0,4	7,6
XDHT 11T308FR-ALP	0,8	7,2
XDHT 11T312FR-ALP	1,2	6,5
XDHT 11T316FR-ALP	1,6	6,8
XDHT 11T320FR-ALP	2,0	6,4
XDHT 11T325FR-ALP	2,5	5,5
XDHT 11T332FR-ALP	3,2	4,8
XDHT 11T340FR-ALP	4,0	4,0
XDHT 11T350FR-ALP	5,0	3,0

Shoulder milling



Pocket milling



Pocket milling with thin walled components



Modification to front profile





For inserts with a corner radius larger than 3.2 mm the basic body of the tool must be modified according to the drawing above.

System MaxiMill HSC-11

Machining strategy

Helical plunging

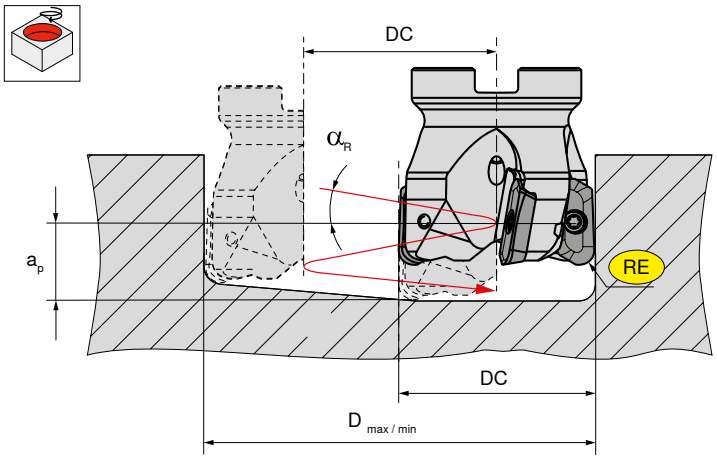

RE = Insert radius
α_R in mm = Maximum ramping angle (related to centre of tool)

a_p in mm = pitch → D x π x tan (α_R)

D in mm = → D_{max} – DC and/or D_{min} – DC

For flat bottom hole

$D_{max.}$ in mm = largest drilling diameter
$D_{min.}$ in mm = smallest drilling diameter
$DN_{max.}$ in mm = Maximum hole diameter for non flat bottom

DC mm		XDHT-11 (HSC-11)								
(DN_{max})		RE = 0,2	RE = 0,4	RE = 0,8	RE = 1,2	RE = 1,6	RE = 2,0	RE = 2,5	RE = 3,2	RE = 4,0
16	α_R	9,7°	10,0°	9,9°	9,4°	8,9°	8,4°	7,9°	7,0°	6,1°
	$D_{max.}$	30	30	29	28	27	27	26	24	23
(31)	$D_{min.}$	18	18	18	18	18	18	18	18	18
18	α_R	9,4°	9,1°	8,7°	8,3°	7,9°	7,5°	6,9°	6,2°	5,3°
	$D_{max.}$	34	34	33	32	31	31	30	28	27
(35)	$D_{min.}$	22	22	22	22	22	22	22	22	22
19	α_R	8,8°	8,6°	8,3°	7,9°	7,5°	7,5°	6,5°	5,9°	5,1°
	$D_{max.}$	36	36	35	34	33	33	32	30	29
(37)	$D_{min.}$	24	24	24	24	24	24	24	24	24
20	α_R	8,4°	8,2°	7,8°	7,4°	7,7°	6,7°	6,2°	5,5°	4,8°
	$D_{max.}$	38	38	37	36	35	35	34	32	31
(39)	$D_{min.}$	26	26	26	26	26	26	26	26	26
22	α_R	7,6°	7,4°	7,8°	6,7°	6,4°	6,5°	5,6°	5,2°	4,3°
	$D_{max.}$	42	42	41	40	39	39	38	36	35
(43)	$D_{min.}$	30	30	30	30	30	30	30	30	30
25	α_R	6,7°	6,5°	6,2°	5,9°	5,6°	5,3°	4,9°	4,4°	3,8°
	$D_{max.}$	48	48	47	46	45	45	44	42	41
(49)	$D_{min.}$	36	36	36	36	36	36	36	36	36
32	α_R	4,7°	4,7°	4,8°	4,6°	4,3°	4,1°	3,8°	3,4°	2,9°
	$D_{max.}$	62	62	61	60	59	59	58	56	55
(63)	$D_{min.}$	50	50	50	50	50	50	50	50	50
40	α_R	3,3°	3,3°	3,4°	3,4°	3,5°	3,3°	3,0°	2,7°	2,3°
	$D_{max.}$	78	78	77	76	75	75	74	72	71
(79)	$D_{min.}$	66	66	66	66	66	66	66	66	66
50	α_R	2,4°	2,5°	2,5°	2,5°	2,6°	2,6°	2,4°	2,2°	1,9°
	$D_{max.}$	98	98	97	96	95	95	94	92	91
(99)	$D_{min.}$	86	86	86	86	86	86	86	86	86
63	α_R	1,7°	1,7°	1,7°	1,8°	1,8°	1,8°	1,8°	1,7°	1,5°
	$D_{max.}$	124	124	123	122	121	121	120	118	117
(125)	$D_{min.}$	112	112	112	112	112	112	112	112	112
80	α_R	1,1°	1,1°	1,1°	1,1°	1,1°	1,1°	1,1°	1,2°	1,2°
	$D_{max.}$	158	158	157	156	155	155	154	152	151
(159)	$D_{min.}$	146	146	146	146	146	146	146	146	146
100	α_R	0,8°	0,8°	0,9°	0,9°	0,9°	0,9°	0,9°	0,9°	0,9°
	D_{max}	198	198	197	196	195	195	194	192	191
(199)	$D_{min.}$	186	186	186	186	186	186	186	186	186

System MaxiMill HSC/HPC-19

Machining strategy

Helical plunging

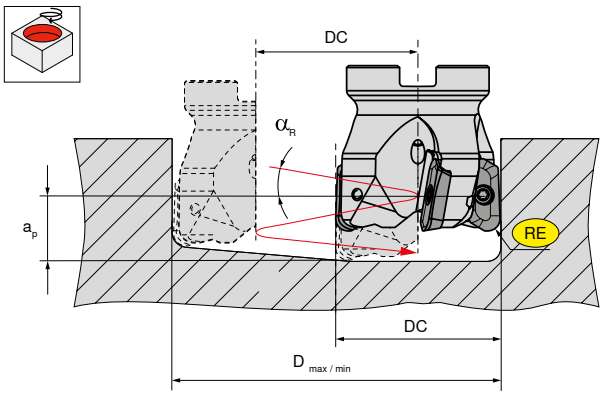

RE = Insert radius
α_R in mm = Maximum ramping angle (related to centre of tool)

a_p in mm = pitch → D x π x tan (α_R)

D in mm = → D_{max} – DC and/or D_{min} – DC

For flat bottom hole

$D_{max.}$ in mm = largest drilling diameter
$D_{min.}$ in mm = smallest drilling diameter
$DN_{max.}$ in mm = Maximum hole diameter for non flat bottom

	DC mm	DN_{max} mm	α_R °	D_{max} mm	D_{min} mm
RE = 0,2 mm	**25**	49	7°02‘	48	32
	32	63	4°34‘	62	46
	40	79	3°47‘	78	62
	50	99	3°01‘	97	81
	63	125	2°17‘	124	107
	80	159		158	141
	100	199		198	181
RE = 0,4 mm	**25**	49	7°08‘	48	32
	32	63	4°37‘	62	46
	40	79	3°49‘	78	62
	50	99	3°02‘	98	81
	63	125	2°18‘	124	107
	80	159		158	141
	100	199		198	181
RE = 0,8 mm	**25**	49	7°21‘	47	32
	32	63	4°44‘	61	46
	40	79	3°53‘	77	62
	50	99	3°05‘	97	81
	63	125	2°20‘	123	107
	80	159		157	141
	100	199		197	181
RE = 2,0 mm	**25**	49	8°40‘	45	32
	32	63	5°04‘	59	46
	40	79	4°06‘	75	62
	50	99	3°13‘	95	81
	63	125	2°25‘	121	107
	80	159		155	141
	100	199		195	181
RE = 2,5 mm	**25**	49	8°24‘	44	32
	32	63	5°13‘	58	46
	40	79	4°12‘	74	62
	50	99	3°17‘	94	81
	63	125	2°27‘	120	107
	80	159		154	141
	100	199		194	181
RE = 3,2 mm	**25**	49	8°54‘	42	32
	32	63	5°26‘	56	46
	40	79	4°20‘	72	62
	50	99	3°21‘	92	81
	63	125	2°30‘	118	107
	80	159		152	141
	100	199		192	181
RE = 4,0 mm	**25**	49	9°32‘	41	32
	32	63	5°42‘	55	46
	40	79	4°30‘	71	62
	50	99	3°28‘	91	81
	63	125	2°33‘	117	107
	80	159		151	141
	100	199		191	181
RE = 5,0 mm	**25**	49	6°49‘	39	32
	32	63	3°59‘	53	46
	40	79	3°20‘	69	62
	50	99	2°13‘	89	81
	63	125	1°52‘	115	107
	80	159		149	141
	100	199		189	181

System MaxiMill HSC/HPC-19

Machining strategy

Axial ramping

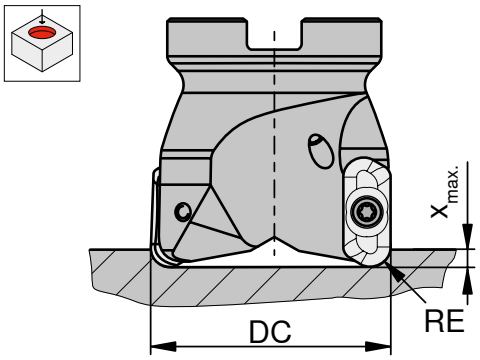

HSC 19	DC mm	19 RE 0,2–4,0 $x_{max.}$ mm	19 RE 5,0 $x_{max.}$ mm
CHSC 19 / GHSC 19 / MHSC 19	25	5,0	4,0
CHSC 19 / GHSC 19 / MHSC 19	32–40	4,0	3,0
AHSC 19	40–100	4,0	3,0

HPC 19	DC mm	19 RE 0,2–4,0 $x_{max.}$ mm	19 RE 5,0 $x_{max.}$ mm
CHPC 19 / MHPC 19	22–25	5,0	4,0
CHPC 19 / MHPC 19	32–50	6,0	5,0
AHPC 19	40–63	6,0	5,0

Angled ramping

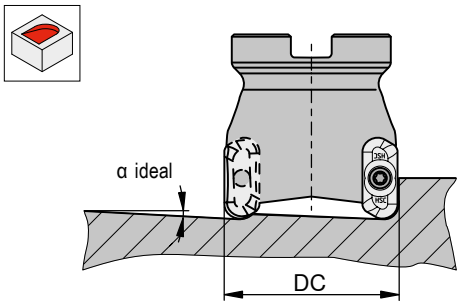

DC mm	α ideal HSC 19	α ideal HPC 19
25	11°	11°
32	7°	7°
40	5°	5°
50	4°	4°
63	3°	3°
80	2°	
100	2°	

Modification to basic body

HSC 19





Modification to front profile

HPC 19



For inserts with a corner radius larger than 4.0 mm the basic body of the tool must be modified according to the drawing above.

15

System MaxiMill HSC/HPC-19

Machining strategy

▽ + ▽▽ Excellent side wall quality after roughing operation.
Additional finishing operations minimized or no longer required.

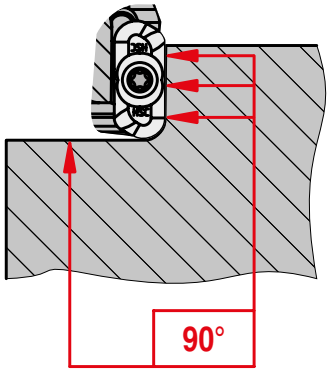

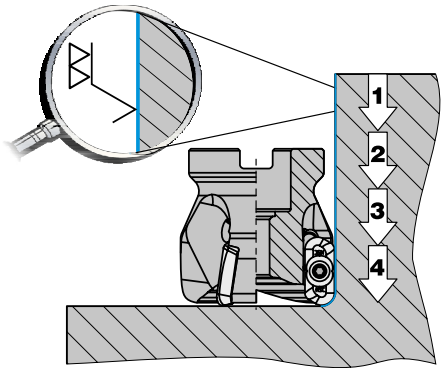

With maximum chip volume

Indexable Insert	RE mm	a_p mm	$a_{p\ max.}$ mm
XDH. 190402FR-ALP	0,2	18,0	17,8
XDH. 190404FR-ALP	0,4	18,0	17,6
XDH. 190408FR-ALP	0,8	18,0	17,2
XDH. 190420FR-ALP	2,0	18,0	16,0
XDH. 190425FR-ALP	2,5	18,0	15,0
XDH. 190432FR-ALP	3,2	18,0	14,8
XDH. 190440FR-ALP	4,0	18,0	14,0
XDH. 190450FR-ALP	5,0	17,0	13,0

With maximum side wall quality

Indexable Insert	RE mm	$a_{p\ max.}$ mm
XDH. 190402FR-ALP	0,2	11,8
XDH. 190404FR-ALP	0,4	11,6
XDH. 190408FR-ALP	0,8	11,2
XDH. 190420FR-ALP	2,0	10,0
XDH. 190425FR-ALP	2,5	9,5
XDH. 190432FR-ALP	3,2	8,8
XDH. 190440FR-ALP	4,0	8,0
XDH. 190450FR-ALP	5,0	7,0

Shoulder milling

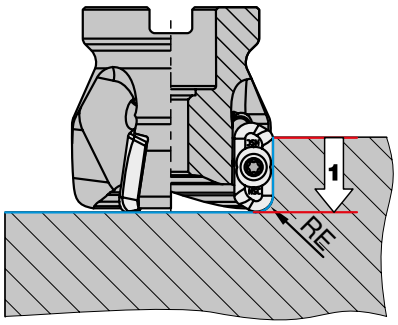

Pocket milling



Pocket milling with
thin walled components



This information applies to the inserts type XDHT 19 and XDHX 19.

System MaxiMill HPC-04/12

Machining strategy

What do you have to take into account?

- ▲ Machine stability.
- ▲ Stable work piece clamping and tool adapter.
- ▲ Use of coolant generally not necessary, however, this will facilitate the removal of the chips - also improved surface quality.
- ▲ Take into account thermal stress and critical temperature of 600°C! If required for material, work with coolant.
- ▲ Avoid vibration.
- ▲ Observe balancing quality class.
- ▲ Observe chemical reactions of diamond to carbide forming elements (Fe, Ti, Ta, Co, Ni)

Excellent suitability

- ▲ for components made of light metals and non-ferrous metals, plastic, fibre composite materials, graphite ...
- ▲ when the simplest setting method saves cost for tool presetting.
- ▲ for high-volume production.
- ▲ for high surface quality of the work pieces.
- ▲ when long tool life is necessary to reduce tool changes and expensive machine downtime.
- ▲ when the tool is already on site (presetting, etc.)

Quality class check

After assembly, clamping of the inserts and adjustment of the axial run-out the balancing quality class of the tools should be checked. When applying shell milling cutters, after assembly with an adapter balancing is necessary.

Setting trailing edge inserts

As in the setting procedure described above the standard inserts are adjusted to a radial run-out of = 0.02 mm. The inserts with Masterfinish edge are then set to 0.02–0.03 mm above the highest cutting edge.

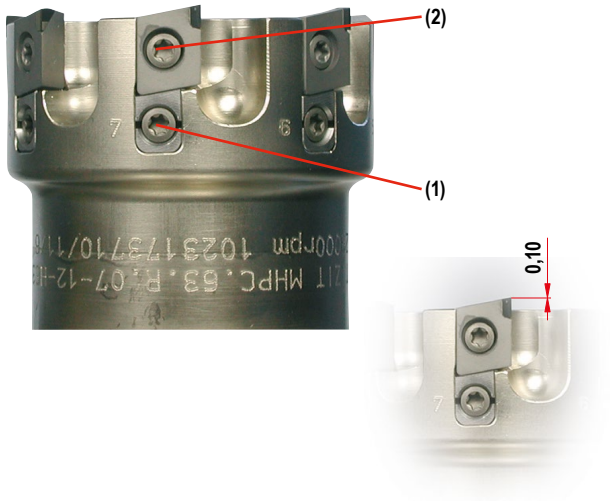

The adjustment procedure

1 Mount Adjustment wedgesin the tools (as delivered). Tighten adjustment screw (1) without deforming the wedges.

2 Mount the PCD inserts and tighten the clamping screws (2) with 1.0 Nm.

3 Mark " highest edge" with the help of pre-setting equipment.

4 Adjust the PCD insert by 0.02 mm turning the clamping screw (1) clockwise.

Pre-loading must be reached. Use the angled TORX screwdrivers

5 Set other cutting edges to this level, maximum deviation of 0.005 mm. Maximum length adjustment = 0.10 mm.

6 Tighten all insert tightening screws (2) to 5,0 Nm.

7 Check axial run-out of all inserts: Target = 0.005 mm.

Perfect precision – MaxiMill HPC-12

The adjustable high-performance tool for the finishing of aluminium components

Tool body made of steel

- For highest stability
- Maximum abrasion resistance
- Bimetallic version from diameter 160 mm easier handling and spindle protection with large tools

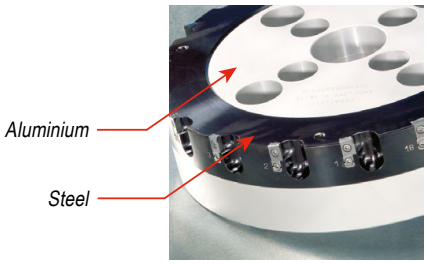

Picture shows bimetallic version

Available as shell milling cutters and monobloc type

- Direct HSK63 connection as monobloc type
- Monobloc tools balanced to G2.5 at n=20,000 min^{-1} (ISO1940)

Particularly for HSC applications with internal coolant supply

- Improved chip evacuation
- High surface quality
- Optimum application conditions
- Suitability for minimum quantity lubrication

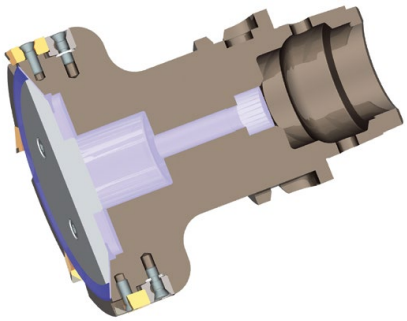

Time is money – the system MaxiMill HPC-12 is simple and quick to adjust!

Highly positive rake angle of +25°

- Low cutting forces
- Increased parallelism of surfaces
- Minimised component deformation

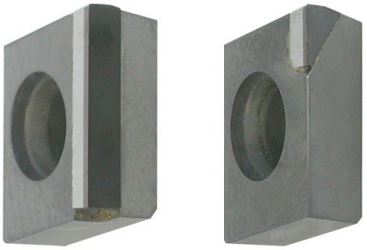

Tangential concept

- Stable location for the PCD segment and maximum process security

Adapted PCD cutting edge

- High impact strength when milling!
- Maximum edge stability
- Reduced built-up edge on the work piece
- The machining of Al-Si alloys with over 12 % silicon is possible without problems

Inserts Selection

- Standard insert
- Insert with corner radius
- Insert with trailing edge

Average chip thickness [h_m] – the approach

Shoulder milling

1 Select appropriate average chip thickness [h_m] for the steel from the table.

Material	Tensile strength N/mm²	h_m mm
for steel	...–800	0,16
for steel	800–1000	0,14
for steel	1000–1200	0,12
for steel	1200–...	0,10
for stainless steel	...–750	0,15
for stainless steel	750–900	0,13
for stainless steel	900–1150	0,11
for stainless steel	1150–...	0,09 *

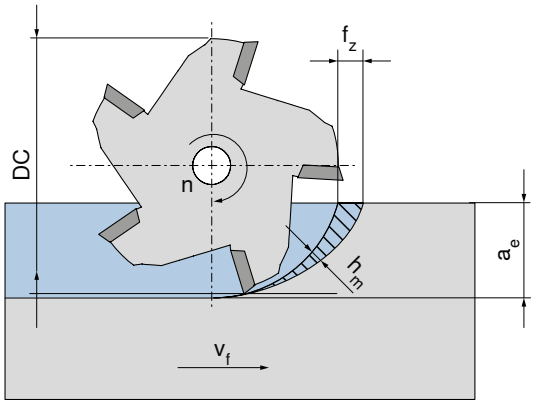

2 Select the corrected feed rate value from the table based on the appropriate chip thickness [h_m] and depth of cut [a_e].

h_m mm	Corrected feed value f_z for h_m				
0,16	0,36	0,29	0,25	0,18	0,16
0,14	0,31	0,26	0,22	0,16	0,14
0,12	0,27	0,22	0,19	0,14	0,12
0,10	0,22	0,18	0,16	0,12	0,10
0,15	0,34	0,27	0,24	0,17	0,15
0,13	0,29	0,24	0,21	0,15	0,13
0,11	0,25	0,20	0,17	0,13	0,11
0,09 *	0,20	0,16	0,14	0,10	0,09 *
a_e =	**0,2 x DC**	**0,3 x DC**	**0,4 x DC**	**0,75 x DC**	**1 x DC**

* f_z < 0,08 mm: Danger, as tool is not working and cutting

Start values f_z in mm from starting parameter diagram

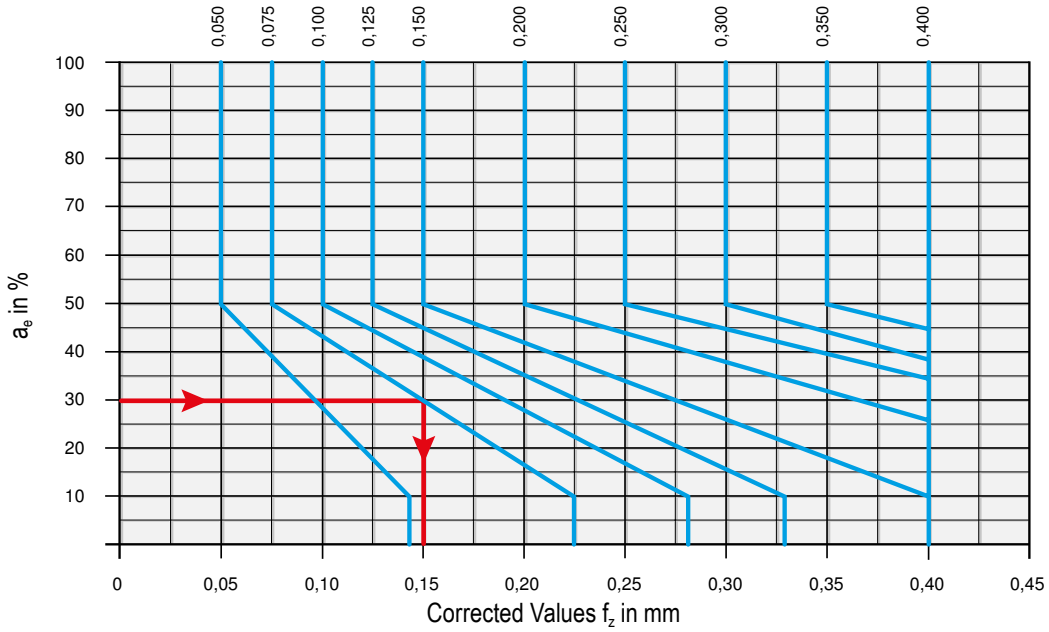

Example:
Start value (f_z) = 0.075 mm
a_e = 30 %
corrected value (f_z) = 0.15 mm

15

System MaxiMill HFC-06

Machining strategy

Programmed radius R = 1.2 mm





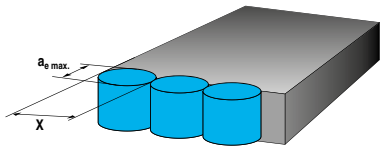

Cutting depth and remaining material			Cutting width for flat surfaces			Cutting depth when plunging				
IC in mm	RE in mm	$a_{p\ max.}$ in mm	DCX in mm	X in mm	B in mm	$a_{e\ max.}$ in mm	f_z in mm			X
							initial	min.	max.	
6,35	0,5	0,8	16–32	DCX–(2 x B)	4,3	5,3	0,10	0,08	0,15	<0,7 x DCX

	circular		
	Helical plunging (helical plunging into solid material)		
DCX	$D_{min.}$	$D_{max.}$	$\alpha_{R\ max.}$
mm	mm	mm	°
16	22	31	4,5°
20	30	39	2,3°
25	40	49	1,3°
32	54	63	0,9°
42	74	83	0,6°

	axial	Angled
	Plunging	
DCX	$X_{max.}$	$\alpha_{R\ max.}$
mm	mm	°
16		5,9°
20		3,2°
25	0,5	2°
32		1,3°
42		0,7°

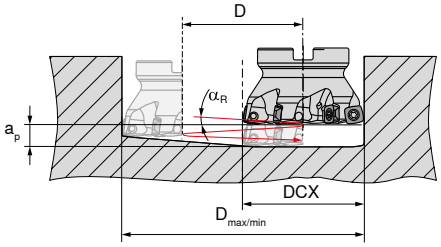

Starting Parameter

XPLX 06

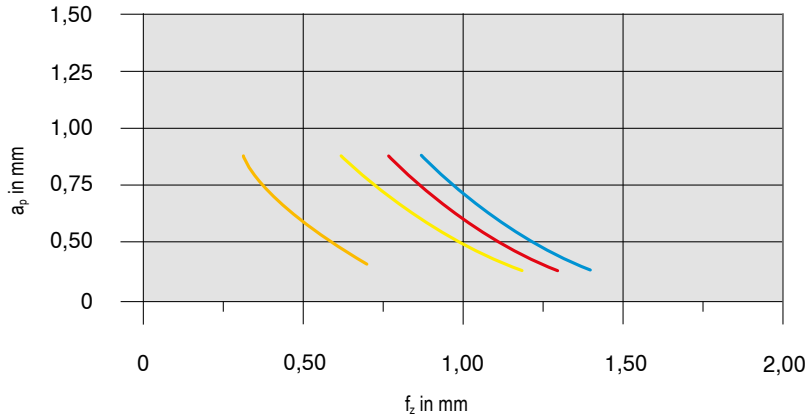

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**XPLX 060305SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**XPLX 060305ER-M50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**XPLX 060305ER-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**XPLX 060305SR-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill HFC-09

Machining strategy

Programmed radius R = 2 mm





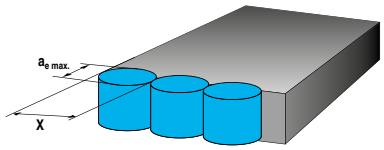

Cutting depth and remaining material			Cutting width for flat surfaces			Cutting depth when plunging				
IC in mm	RE in mm	$a_{p\,max.}$ in mm	DCX in mm	X in mm	B in mm	$a_{e\,max.}$ in mm	f_z in mm			X
							initial	min.	max.	
9	0,8	1	25–66	DCX–(2 x B)	5,9	7,5	0,10	0,08	0,15	<0,7 x DCX

	circular		
	Helical plunging (helical plunging into solid material)		
DCX mm	$D_{min.}$ mm	$D_{max.}$ mm	$\alpha_{R\,max.}$ °
25	35	48	3,1°
32	49	62	1,7°
35	55	68	1,4°
40	65	78	1,0°
42	69	82	0,9°
50	85	98	0,8°
52	89	102	0,7°
63	111	124	0,7°
66	117	130	0,6°

	axial	Angled
	Plunging	
DCX mm	$X_{max.}$ mm	$\alpha_{R\,max.}$ °
25		3,6°
32		2,0°
35		1,6°
40		1,2°
42	0,75	1,1°
50		0,9°
52		0,8°
63		0,8°
66		0,7°

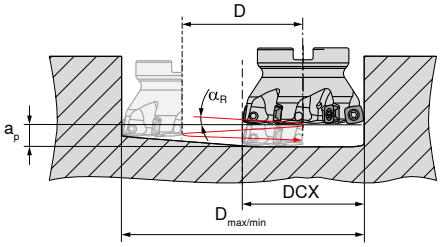

Starting Parameter

XDLX 09

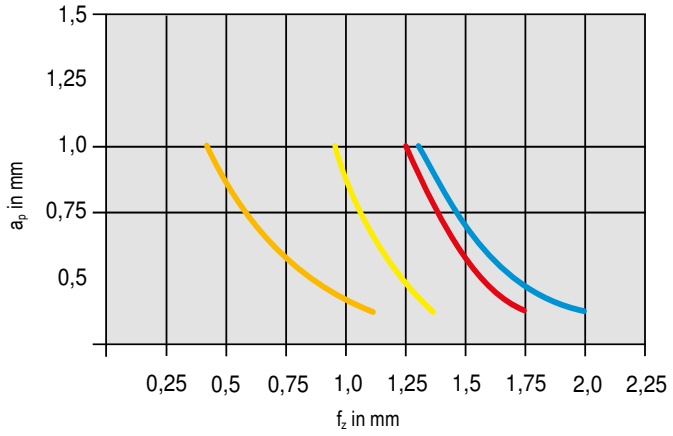

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**XDLX09T308SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**XDLX09T308SR-M50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**XDLX09T308SR-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**XDLX09T308ER-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill HFC-12

Machining strategy

Programmed radius R = 3 mm





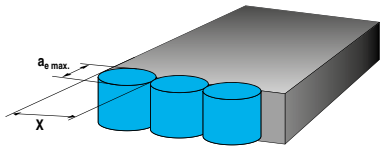

Cutting depth and remaining material			Cutting width for flat surfaces			Cutting depth when plunging				
IC in mm	RE in mm	$a_{p\,max.}$ in mm	DCX in mm	X in mm	B in mm	$a_{e\,max.}$ in mm	f_z in mm			X
							initial	min.	max.	
12	1,0	2	32–100	DCX–(2 x B)	8,3	10	0,15	0,10	0,20	<0,7 x DCX

	circular		
	Helical plunging (helical plunging into solid material)		
DCX mm	$D_{min.}$ mm	$D_{max.}$ mm	$\alpha_{R\,max.}$ °
32	44	62	6,1°
35	50	68	3,7°
40	60	78	2,5°
42	64	82	2,3°
50	80	98	1,3°
52	84	102	1,3°
63	106	124	0,9°
66	112	130	0,9°
80	140	158	1,1°
100	180	198	0,6°

	axial	Angled
	Plunging	
DCX mm	$X_{max.}$ mm	$\alpha_{R\,max.}$ °
32	1,15	7,2°
35		4,4°
40		2,9°
42		2,7°
50 + 52		1,5°
63 + 66		1,1°
80		1,3°
100		0,7°

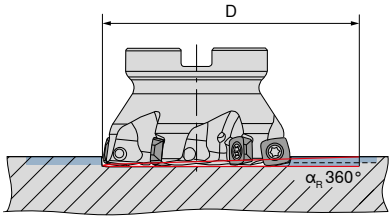

Starting Parameter

XOLX 12

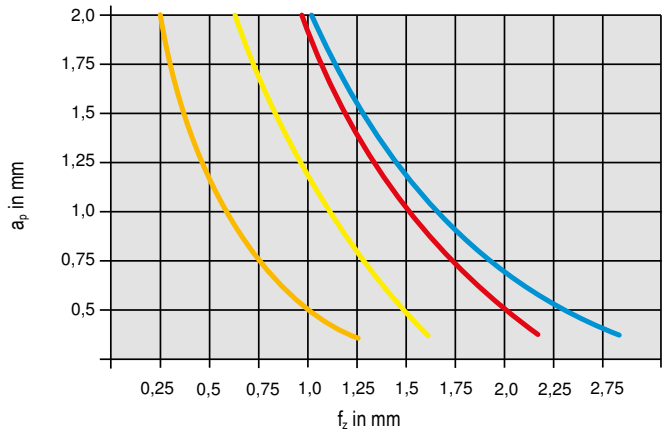

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**XOLX120410SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**XOLX120410ER-M50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**XOLX120410ER-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**XOLX120410ER-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill HFC-19

Machining strategy

Programmed radius R = 5 mm





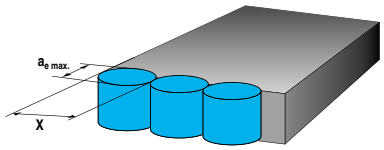

Cutting depth and remaining material			Cutting width for flat surfaces			Cutting depth when plunging				
IC in mm	RE in mm	$a_{p\,max.}$ in mm	DCX in mm	X in mm	B in mm	$a_{e\,max.}$ in mm	f_z in mm			X
							initial	min.	max.	
19,14	1,5	3,3	63–160	DCX–(2 x B)	13,1	12	0,2	0,10	0,25	<0,65 x DCX

DCX	circular		
	Helical plunging (helical plunging into solid material)		
	$D_{min.}$	$D_{max.}$	$\alpha_{R\,max.}$
mm	mm	mm	°
63	97	123	2,5°
80	131	157	1,4°
100	171	197	1,0°
125	221	247	0,7°
160	291	317	0,5°

DCX	axial	Angled	
		Plunging	
	$X_{max.}$	$\alpha_{R\,max.}$	$a_{p\,max}$
mm	mm	°	mm
63		2,9°	
80		1,8°	
100	1,7	1,3°	3,3
125		1,0°	
160		0,7°	

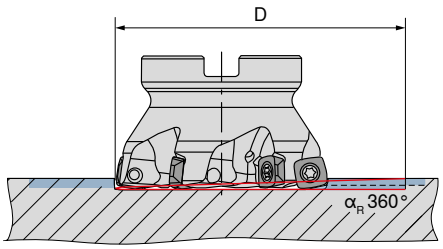

Starting Parameter

XOLX 19

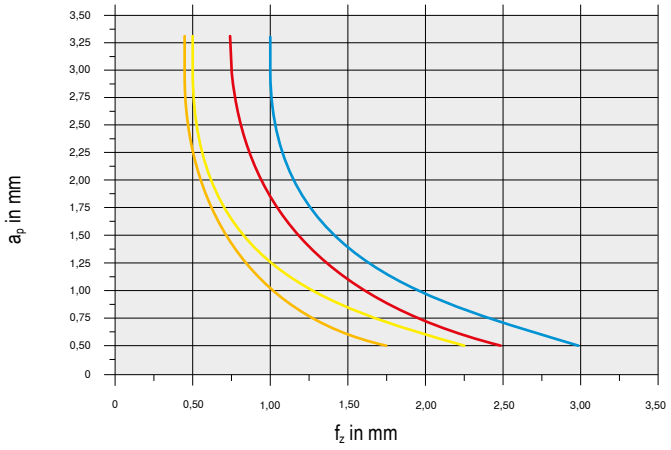

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**XOLX190615SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**XOLX190615SR-M50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**XOLX190615SR-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**XOLX190615ER-F40**	**CTC5240**	35	Emulsion

15

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill DHFC

Cutting data standard values

for standard inserts

	F			M			R		
Material	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm
Steel	130–300	0,25–1,0	0,7	130–300	0,25–1,0	0,75			
Stainless steel				90–210	0,25–1,0	0,60			
Cast iron				120–270	0,2–1,1	0,70	120–270	0,2–1,2	0,75
Non-ferrous metals									
Heat-resistant				40–80	0,15–0,75	0,6			
Tempered steel									
Non-metal materials									

Machining strategy

Programmed Radius R = 1,4 mm

Helical plunging



DC mm	D_{min} mm	D_{max} mm	α°
16	23	31	2,5
20	31	39	1,9
25	41	49	1,5
32	55	63	1,2
35	61	69	1,0
42	75	83	0,9

Axial plunging into solid material

DC mm	X_{max} mm
16	0,35
20	0,40
25	0,45
32–35	0,50
40	0,55

Angled ramping

DC mm	α°	y mm
16	<2,5	7
20	<1,9	11
25	<1,5	16
32	<1,2	23
35	<1,0	26
42	<0,9	33

Detailed information on cutting speed for each grade can be found on → page 146–148

MaxiMill 251/251 RS system

Technical data

Recommended cutting depth

Ø mm	4-position $a_{p\,max.}$ mm	4-position $a_{p\,max}$ theoretical mm	8-face $a_{p\,max.}$ mm
5	1,0	2,0	0,7
8	1,5	3,5	1,1
10	2,5	4,5	1,4
12	3,0	5,5	1,7
16	4,0	7,5	2,3
20	4,0	9,5	2,9

Average depth for the 4/8 index use of the insert

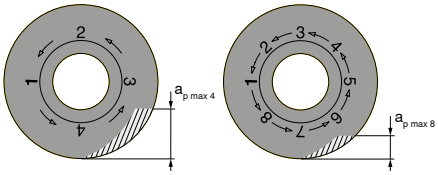

Detailed information on cutting speed for each grade can be found on → page 146–148

Angled ramping

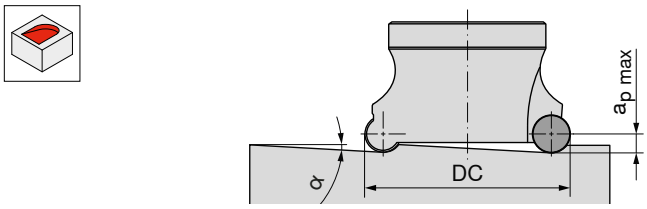

Ø DC mm	05 α °	08 α °	10 α °	12 α °	16 α °	20 α °
10	3,4					
12	16,0					
16	8,0	5,0				
20	5,5	20,0	1,3			
25	4,0	13,0	2,0	6,0		
32	3,0	8,0	3,0	4,0		
40			3,3	2,8		
42			3,1			
50			2,4	2,6	4,0	
52			2,2	2,3		
63				1,9	2,8	
66				1,6		
80				1,3	2,0	3,2
100				1,0	1,5	2,3
125						1,7

Axial ramping



Ø DC mm	05 $X_{max.}$ mm	08 $X_{max.}$ mm	10 $X_{max.}$ mm	12 $X_{max.}$ mm	16 $X_{max.}$ mm	20 $X_{max.}$ mm
10	0,5					
12	1,3					
16	1,3	0,5				
20	1,3	2,7	0,2			
25	1,3	2,7	0,4	1,0		
32	1,3	2,7	0,8	1,1		
40			1,5	1,2		
42			1,5	1,5		
50			1,5	1,5	2,0	
52			1,5	1,5	2,0	
63				1,5	2,0	
66				1,5	2,0	
80				1,5	2,0	3,0
100				1,5	2,0	3,0
125						3,0

Helical plunging



$D_{min.}$ = smallest drilling diameter depending on the tool diameter



$D_{max.}$ = Maximum hole diameter Depending on the tool diameter

maximum possible hole diameter = 2 x DC – 1 mm

Ø DC mm	05 D_{min} mm	05 D_{max} mm	05 α_R °	08 D_{min} mm	08 D_{max} mm	08 α_R °	10 D_{min} mm	10 D_{max} mm	10 α_R °	12 D_{min} mm	12 D_{max} mm	12 α_R °	16 D_{min} mm	16 D_{max} mm	16 α_R °	20 D_{min} mm	20 D_{max} mm	20 α_R °
10	12	15	2,5															
12	16	19	2,1															
16	24	27	1,5	21	24	2,4												
20	32	35	1,2	27	32	1,9	26	30	1,3									
25	42	45	1,0	37	42	1,5	37	40	1,8	31	38	2,2						
32	56	59	0,7	51	56	1,2	50	54	1,5	46	52	1,7						
40							64	70	1,1	62	68	1,4						
42							68	74	1,1									
50							84	90	0,9	81	88	1,1	75	84	1,5			
52							88	94	0,9	86	92	1,0						
63										107	114	0,9	101	110	1,1			
66										113	120	0,8						
80										142	148	0,7	135	144	0,9	128	140	1,1
100										181	188	0,5	175	184	0,7	168	180	0,9
125																218	230	0,7

R100. system

Cutting data standard values

Index	WTN1205	WTN1205	WAN2225	WAN2225	WAN1240	WAN1240	WAX1240	WAX1240	WUN4210	WUN4210
	v_c (m/min)									
P.1.1	**275**	150			**300**	180	**200**	100		
P.1.2	**230**	130			**270**	160	**170**	90		
P.1.3	**190**	100			**225**	130	**140**	80		
P.1.4	**230**	130			**270**	160	**170**	90		
P.1.5	**210**	110			**240**	140	**160**	90		
P.2.1	**230**	130			**270**	160	**170**	90		
P.2.2	**170**	100			**200**	120	**130**	70		
P.2.3	**230**	130			**270**	160	**170**	90		
P.2.4	**160**	90			**180**	110	**120**	60		
P.3.1	**230**	130			**270**	160	**170**	90		
P.3.2	**150**	110			**180**	140	**140**	80		
P.3.3	**130**	90			**150**	120	**120**	70		
P.4.1	**150**	110			**180**	140	**140**	80		
P.4.2	**150**	100			**170**	130	**130**	70		
M.1.1	**230**	130	**230**	**140**	270	160	170	90		
M.2.1			**200**	**120**						
M.3.1										
K.1.1	**275**	200			360	90	150	110	200	150
K.1.2	**150**	100			360	90	150	110	150	120
K.2.1	**180**	100			230	170	150	110	200	150
K.2.2	**150**	100			160	110	150	110	160	130
K.3.1	**180**	100			210	160			200	150
K.3.2	**180**	100			210	160			150	120
N.1.1										**1200**
N.1.2										**800**
N.2.1										**880**
N.2.2										**800**
N.2.3										**230**
N.3.1										**280**
N.3.2										**280**
N.3.3										**160**
N.4.1										**260**
S.1.1				**50**						
S.1.2				**45**						
S.2.1				**24**						
S.2.2				**16**						
S.2.3				**20**						
S.3.1				**50**						
S.3.2				**32**						
S.3.3				**25**						
H.1.1	**140**	80								
H.1.2	**120**	70								
H.1.3	80	40								
H.1.4										
H.2.1										
H.3.1										
O.1.1									180	150
O.1.2										
O.2.1									260	230
O.2.2										
O.3.1									450	

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

System R 1000, 1002, 1007

Cutting data standard values

		f_z / a_p mm	WTN1205	WAN2225	WAN1240	WAX1240	WUN4210
Steel							
	0702	f_z	**0,1–0,7**			**0,2–0,5**	0,1–0,2
		a_p	**0,1–0,7**			**0,1–0,75**	0,1–0,2
	1003	f_z	**0,1–0,3**		**0,2–0,9**	**0,2–0,7**	0,15–0,3
		a_p	**0,1–1,0**		**0,2–1,5**	**0,2–1,5**	0,1–0,3
	12T3	f_z	**0,1–0,3**		**0,25–1,0**	**0,–0,8**	0,15–0,3
		a_p	**0,1–1,5**		**0,2–2,0**	**0,2–2,0**	0,1–0,3
	1604	f_z	**0,2–0,3**		**0,3–1,2**	**0,25–1,0**	0,15–0,3
		a_p	**0,2–1,5**		**0,25–3,0**	**0,2–3,0**	0,1–0,4
Stainless steel							
	0702	f_z	0,1–0,2			0,2–0,5	0,1–0,2
		a_p	0,1–0,2			0,1–0,75	0,1–0,2
	1003	f_z	0,15–0,3	**0,15–0,6**		0,2–0,7	0,15–0,3
		a_p	0,1–0,3	**0,4–1,0**		0,2–1,5	0,1–0,3
	12T3	f_z	0,15–0,3	**0,2–0,8**		0,–0,8	0,15–0,3
		a_p	0,1–0,3	**0,5–2,0**		0,2–2,0	0,1–0,3
	1604	f_z	0,15–0,3	**0,3–1,0**		0,25–1,0	0,15–0,3
		a_p	0,1–0,3	**0,6–3,0**		0,2–3,0	0,1–0,3
Cast iron							
	0702	f_z	**0,1–0,3**			0,1–0,3	0,1–0,3
		a_p	**0,1–0,7**			0,1–0,7	0,1–0,7
	1003	f_z	**0,15–0,3**		0,1–0,3	0,1–0,3	0,15–0,3
		a_p	**0,1–1,0**		0,1–1,0	0,1–1,0	0,1–1,0
	12T3	f_z	**0,15–0,4**		0,1–0,4	0,1–0,4	0,15–0,4
		a_p	**0,1–1,5**		0,1–1,15	0,1–1,5	0,1–1,5
	1604	f_z	**0,2–0,5**		0,2–0,05	0,2–0,5	0,2–0,5
		a_p	**0,2–3,0**		0,2–2,0	0,2–3,0	0,2–3,0

15

System R 1000, 1002, 1007

Cutting data standard values

		f_z / a_p mm	WTN1205	WAN2225	WAN1240	WAX1240	WUN4210
Non-ferrous metals							
	0702	f_z					**0,1–0,3**
		a_p					**0,1–1,0**
	1003	f_z					**0,1–0,3**
		a_p					**0,1–1,5**
	12T3	f_z					**0,1–0,4**
		a_p					**0,1–2,0**
	1604	f_z					**0,2–0,5**
		a_p					**0,2–4,0**
Heat-resistant							
	1003	f_z		**0,1–0,4**			
		a_p		**0,2–1,0**			
	12T3	f_z		**0,15–0,5**			
		a_p		**0,3–1,5**			
	1604	f_z		**0,15–0,5**			
		a_p		**0,3–2,0**			
Tempered steel							
	0702	f_z	**01–0,2**				
		a_p	**0,1–0,3**				
	1003	f_z	**0,1–0,2**				
		a_p	**0,1–0,5**				
	12T3	f_z	**0,1–0,25**				
		a_p	**0,1–0,7**				
	1604	f_z	**0,15–0,3**				
		a_p	**0,2–1,0**				
Non-metal materials							
	0702	f_z					0,1–0,3
		a_p					0,1–1,0
	1003	f_z					0,1–0,3
		a_p					0,1–1,5
	12T3	f_z					0,1–0,4
		a_p					0,1–2,0
	1604	f_z					0,2–0,5
		a_p					0,2–4,0

WTN 1205

Up to 48 HRC: a_p-range as indicated in the table
Up to 55 HRC: maximum value a_p x 0,7
Up to 65 HRC: maximum value a_p x 0,5

System R 1000, 1002, 1007

Machining strategy

Axial ramping



reduce f_z to 30% according to application table

→ v_c Page 182–184

	07	10	12 	16 
Ø DC mm	$X_{max.}$ mm	$X_{max.}$ mm	$X_{max.}$ mm	$X_{max.}$ mm
8–160	1,2	2,5	3,0	4,0

Angled ramping





y = minimum cutter movement
z = minimum cutter movement
a_p / f_z application table

→ v_c Page 182–184

	07			10			12 			16 		
Ø DC mm	α°	y mm	z mm	α°	y mm	z mm	α°	y mm	z mm	α°	y mm	z mm
8												
10												
12												
14												
15	26,5	2	< 1,2									
16	14,0	4	< 1,2									
18	11,3	6	< 1,2									
20	8,5	8	< 1,2									
22												
24												
25	5,3	13	< 1,2	19,7	7	< 2,5						
30	3,8	18	< 1,2	11,7	12	< 2,5						
32												
35	3,0	23	< 1,2	8,4	17	< 2,5	13,0	13	< 3,0	38,7	5	< 4,0
40												
42	2,3	30	< 1,2	5,9	24	< 2,5	8,5	20	< 3,0			
50												
52				4,2	34	< 2,5	5,7	30	< 3,0	10,3	22	< 4,0
66							3,9	44	< 3,0	6,4	36	< 4,0
80							3,0	58	< 3,0	4,6	50	< 4,0
100										3,3	70	< 4,0
125										2,4	95	< 4,0
160										1,8	130	< 4,0

System R 1000, 1002, 1007

Machining strategy

Helical plunging

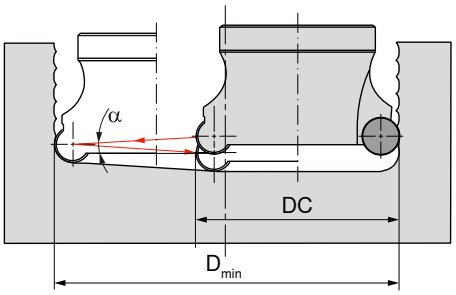

D_{min} = smallest drilling diameter depending on the tool diameter

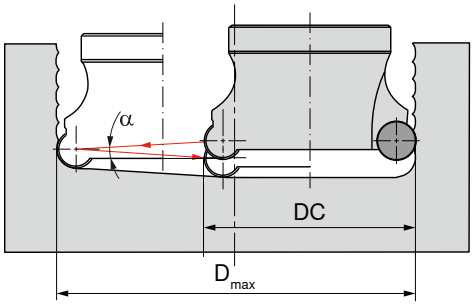

D_{max} = largest drilling diameter depending on the tool diameter

a_p / f_z according to table
→ v_c Page 182–184

	07			10			12			16		
ØDC mm	α°	y mm	z mm	α°	y mm	z mm	α°	y mm	z mm	α°	y mm	z mm
8												
10												
12	24											
14	28											
15	30											
16	32											
18	36	20	36									
20	40	22	40									
22				24	44							
24				26	48							
25	50	32	50									
30	60	42	60									
32						34	64					
35	80	72	70	48	70	40	70			38,7	5	< 4,0
40								42	80			
42	84	66	84	62	84							
50								62	100			
52		86	104	82	104	74	104			10,3	22	< 4,0
66				110	132	102	132	94	132	6,4	36	< 4,0
80				138	160	130	160	122	160	4,6	50	< 4,0
100						170	200	162	200	3,3	70	< 4,0
125						220	250	212	250	2,4	95	< 4,0
160						290	320	282	320	1,8	130	< 4,0

System MaxiMill 252

Machining strategy

Recommended cutting depth

Ø mm	4-position $a_{p\,max}$ mm	mm
10	2,5	4,5
12	3,0	5,5

Starting Parameter

RNHU 10

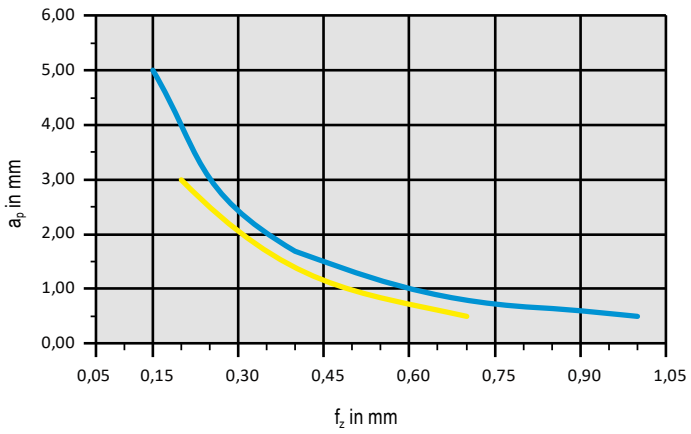

Material			Inserts		v_c in m/min	Cooling
Steel	P.2.2	40CrMnMoS 8-6	XOLX120410SR-M50	CTPP235	180	Dry
Stainless steel	M.1.1	X6CrNiMoTi 1712 2	XOLX120410ER-M50	CTPM240	180	Dry

Starting Parameter

RNHU 12

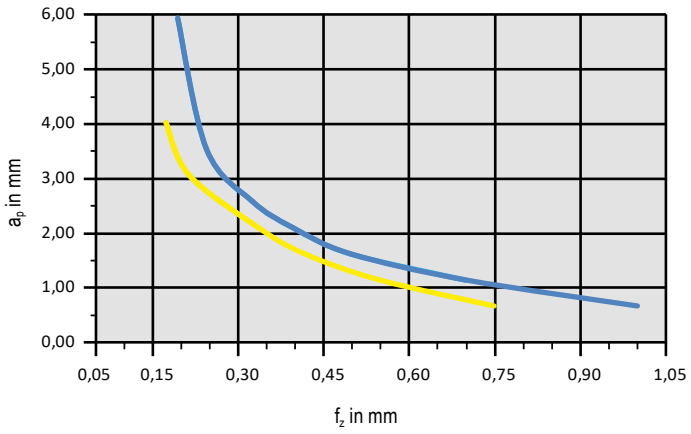

Material			Inserts		v_c in m/min	Cooling
Steel	P.2.2	40CrMnMoS 8-6	XOLX120410SR-M50	CTPP235	180	Dry
Stainless steel	M.1.1	X6CrNiMoTi 1712 2	XOLX120410ER-M50	CTPM240	180	Dry

Detailed information on cutting speed for each grade can be found on → page 146–148

From v_c > 400 m/min, the tool must be balanced!

Cutting data standard values for copy milling cutter K200.

Index	CTPK226		CTPP211		CTPK231		CTCN211		CTPP216		● 1st choice ○ suitable		
	R	F	R	F	R	F	R	F	R	F	Emulsion	Compressed air	MMS
	v_c (m/min)												
P.1.1		280–300	180–220	220–280	160–200				220–300	280–300	○	●	●
P.1.2		220–240	180–220	220–280	160–200				220–300	280–300	○	●	●
P.1.3		220–240	180–220	220–280	160–200				220–300	280–300	○	●	
P.1.4		220–240	180–220	220–280	160–200				220–300	280–300	○	●	
P.1.5		220–240	180–220	220–280	160–200				220–300	280–300	○	●	
P.2.1		280–300	180–220	220–280	160–200				220–300	280–300	○	●	●
P.2.2		280–300	180–220	220–300	160–200				220–300	280–300	○	●	●
P.2.3		280–300	180–220	240–320	160–200				250–360	240–320	○	●	
P.2.4		280–300	180–220	240–320	160–200				250–360	240–320	○	●	
P.3.1		280–300	180–220	220–280	160–200				220–300	280–300	○	●	
P.3.2		280–320	180 – 220	240–320	160–200				250–360	240–320	○	●	●
P.3.3		280–320	180 – 220	240–320	160–200				250–360	240–320	○	●	●
P.4.1		220–220	140–180	200–240	120–180				140–180	200–240	○	●	
P.4.2		220–220	140–180	200–240	120–180				140–180	200–240	○	●	
M.1.1		180–200	140–160	180–200	120–160				220–250	220–240	●	○	
M.2.1		180–200	140–160	180–240	120–160				220–250	220–240	●		
M.3.1		220–220	140–180	200–240	120–180				140–180	200–240	●		
K.1.1		280–300	160–200	200–300	120–200				240–350	240–260		●	○
K.1.2		280–300	160–200	200–300	120–200				240–350	240–260		●	○
K.2.1		280–300	160–200	200–300	120–200				240–350	240–260		●	○
K.2.2		300–350	180–220	240–350	180–200				340–400	240–360		●	○
K.3.1		300–350	180–220	240–350	180–200				340–400	240–360		●	○
K.3.2		240–260	160–200	220–260	160–200				280–340	220–300		●	○
N.1.1			240–280	300–600	300–600					400–450	●		
N.1.2			240–280	300–600	300–600					400–450	●		
N.2.1			240–280	300–600	300–600					400–450	●		
N.2.2			240–280	300–600	300–600					400–450	●		
N.2.3										300–400	●		
N.3.1			240–280	280–320	240–280					300–400	●		
N.3.2			240–280	280–320	240–280					300–400	●		
N.3.3			240–280	280–320	240–280					300–400	●		
N.4.1			300–400	300–400				300–400			●		
S.1.1				80–120	80–120					60–80	●		
S.1.2				80–120	80–120					60–80	●		
S.2.1				80–120	80–120					60–80	●		
S.2.2				80–120	80–120					60–80	●		
S.2.3				80–120	80–120					60–80	●		
S.3.1				60–80	80–120					60–80	●		
S.3.2				60–80	60–80					60–80	●	○	
S.3.3				60–80	60–80					60–80	●	○	
H.1.1		240–260		280–300	140–160				240–260	240–260		●	
H.1.2		240–260		280–300	80–100				220–240	160–240		●	○
H.1.3		200–220		240–260					120–140	100–140		●	○
H.1.4		120–140		160–200								●	○
H.2.1		240–260		280–300	80–100				220–240	160–240		●	○
H.3.1		240–260		280–300	80–100				220–240	160–240		●	
O.1.1			300–400	300–400						300–350		●	
O.1.2			500–600	500–600						600–800		●	
O.2.1			300–400	300–400								●	
O.2.2			300–400	300–400								●	
O.3.1							400–600	600–800				●	

Cutting data standard values for copy milling cutter K200.

Index	Roughing (R)		Finishing (F)		only for -MR3 Roughing (R)		● 1st choice ○ suitable		
	Ø 6-16	Ø 20-32	Ø 6-16	Ø 20-32	Ø 6-16	Ø 20-32	Emulsion	Compressed air	MMS
	f_z (mm/tooth)								
P.1.1	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○	●	●
P.1.2	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○	●	●
P.1.3	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○		●
P.1.4	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○		●
P.1.5	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○		●
P.2.1	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○	●	●
P.2.2	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○	●	●
P.2.3	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○		●
P.2.4	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○		●
P.3.1	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○		●
P.3.2	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○	●	●
P.3.3	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,6**	**0,8–1,25**	○	●	●
P.4.1	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○		●
P.4.2	0,08–0,4	**0,25–0,5**	**0,08–0,3**	**0,2–0,8**	**0,3–0,8**	**1,2–1,5**	○		●
M.1.1	0,08–0,4	**0,25–0,5**	0,08–0,3	0,2–0,5	**0,3–0,6**	0,8–1,5	●	○	
M.2.1	0,08–0,4	**0,25–0,5**	0,08–0,4	0,2–0,6	**0,3–0,6**	0,8–1,25	●		
M.3.1	0,08–0,4	**0,25–0,5**	0,08–0,5	0,2–0,7	**0,3–0,6**	0,8–1,25	●		
K.1.1	0,08–0,4	**0,25–0,5**	0,08–0,3	0,2–0,5	**0,3–0,8**	1,0–1,5		●	○
K.1.2	0,08–0,5	**0,25–0,6**	0,08–0,4	0,2–0,6	**0,3–0,8**	1,0–1,5		●	○
K.2.1	0,08–0,6	**0,25–0,7**	0,08–0,5	0,2–0,7	**0,3–0,8**	1,0–1,5		●	○
K.2.2	0,08–0,7	**0,25–0,8**	0,08–0,6	0,2–0,8	**0,3–0,6**	0,8–1,25		●	○
K.3.1	0,08–0,8	**0,25–0,9**	0,08–0,7	0,2–0,9	**0,3–0,6**	0,8–1,25		●	○
K.3.2	0,08–0,9	**0,25–0,10**	0,08–0,8	0,2–0,10	**0,3–0,6**	0,8–1,25		●	○
N.1.1	0,08–0,35	0,25–0,45	0,06–0,25	0,025–0,45			●		
N.1.2	0,08–0,36	0,25–0,46	0,06–0,26	0,025–0,46			●		
N.2.1	0,08–0,37	0,25–0,47	0,06–0,27	0,025–0,47			●		
N.2.2	0,08–0,38	0,25–0,48	0,06–0,28	0,025–0,48			●		
N.2.3	0,08–0,39	0,25–0,49	0,06–0,29	0,025–0,49			●		
N.3.1	0,08–0,40	0,25–0,50	0,06–0,30	0,025–0,50			●		
N.3.2	0,08–0,41	0,25–0,51	0,06–0,31	0,025–0,51			●		
N.3.3	0,08–0,42	0,25–0,52	0,06–0,32	0,025–0,52			●		
N.4.1	0,08–0,43	0,25–0,53	0,06–0,33	0,025–0,53			●		
S.1.1	0,08–0,3	0,15–0,4	0,05–0,2	0,15–0,25	0,25–0,5	0,6–1,0	●		
S.1.2	0,08–0,3	0,15–0,4	0,05–0,2	0,15–0,25	0,25–0,5	0,6–1,0	●		
S.2.1	0,08–0,3	0,15–0,4	0,05–0,2	0,15–0,25	0,25–0,5	0,6–1,0	●		
S.2.2	0,08–0,3	0,15–0,4	0,05–0,2	0,15–0,25	0,25–0,5	0,6–1,0	●		
S.2.3	0,08–0,3	0,15–0,4	0,05–0,2	0,15–0,25	0,25–0,5	0,6–1,0	●		
S.3.1	0,08–0,3	0,15–0,4	0,05–0,2	0,15–0,25	0,25–0,5	0,6–1,0	●		
S.3.2	0,08–0,35	0,4–0,5	0,08–0,3	0,25–0,5	0,25–0,5	0,6–1,0	●	○	
S.3.3	0,08–0,35	0,4–0,5	0,08–0,3	0,25–0,5	0,25–0,5	0,6–1,0	●	○	
H.1.1								●	
H.1.2								●	○
H.1.3								●	○
H.1.4								●	○
H.2.1								●	○
H.3.1								●	
O.1.1								●	
O.1.2								●	
O.2.1								●	
O.2.2								●	
O.3.1								●	

Maximum axial depths of cut a_p for copy milling cutter K200.

Ball nose insert									
Insert Ø in mm		6	8	10	12	16	20	25	32
		$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$
ROHX-FM3	**R**	0,8	1,0	1,5	2,0	3,0	4,0	5,0	6,0
	F	0,4	0,8	1,0	1,2	1,5	1,5	2,0	2,0
ROHX-FM4	**R**	0,8	1,0	2,0	3,0	4,0	5,0	6,0	8,0
	F	0,4	0,8	1,0	1,2	1,5	1,5	2,0	2,0
ROHX-FM6	**R**	0,8	1,0	1,5	2,0	3,0	4,0	5,0	6,0
	F	0,4	0,8	1,0	1,2	1,5	1,5	2,0	2,0
ROGX-MR4	**R***				4,0	6,0	8,0	12,0	16,0
	F				2,0	3,0	4,0	5,0	6,0
ROHX-MR5	**R**		1,5	2,0					
	F		0,8	1,0					

*a_p with full interference 25 % of Ø DC maximum!

Torus inserts									
Insert Ø in mm		6	8	10	12	16	20	25	32
		$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$	$a_{p\ max.}$
XOHX-FM5	**R**		2,0	3,0	3,0	4,0	5,0	6,0	8,0
	F		0,6	2,0	2,4	3,2	4,0	5,0	6,4
XOHX-MR6	**R**		2,0	3,0	3,0	4,0	5,0	6,0	8,0
	F		0,6	2,0	2,4	3,2	4,0	5,0	6,4
XOHX-FM1	**R**			1,5	2,0	3,0	4,0		
	F			0,8	0,8	1,0	1,0		
XOHX-FM2	**R**		1,0	1,5	2,0	3,0	4,0	5,0	
	F		0,5	0,7	0,8	1,0	1,0	1,5	
XOHX-MR2	**R**	0,8	1,0	1,5	2,0	3,0	4,0	5,0	
	F	0,5	0,5	0,7	0,8	1,0	1,0	1,5	
XOGX-MF4	**R**			1,5	2,0	3,0	4,0		
	F			0,7	0,8	1,0	1,0		
XOHX-MR3	**R**			0,5	0,6	0,8	1,0		
	F								

Ranges of application of geometry

Inserts	F	M	R	Main Application
XOHX-FM1	●	●		Steel, steel casting, heat resistant steel, hardened steel to 63 HRc
XOHX-FM2	●	●		Steel, steel casting, heat resistant steel, hardened steel to 60 HRc
ROHX-FM3	●	●		Steel, steel casting, heat resistant steel
ROHX-FM4	●	●		Steel, steel casting, heat resistant steel, hardened steel to 60 HRc
XOHX-FM5	●	●		Steel, steel casting, heat resistant steel, hardened steel to 60 HRc
ROHX-FM6	●	●	●	Non ferrous metals, plastics, graphite
XOHX-MR2		●	●	long-chipping ferrous metals
XOHX-MR3		●	●	Steel, steel casting, heat resistant steel
ROGX-MR4		●	●	Steel, steel casting, heat resistant steel
XOGX-MF4	●	●		Steel, steel casting, heat resistant steel
ROHX-MR5		●	●	long-chipping ferrous metals
XOHX-MR6		●	●	long-chipping ferrous metals

Cutting data standard values for MaxiMill Slot-SX saws

Index	CTCP335	CTP1340	H216T
	v_c in m/min.		
P.1.1	240	190	
P.1.2	210	160	
P.1.3	180	140	
P.1.4	160	130	
P.1.5	140	120	
P.2.1	220	170	
P.2.2	160	130	
P.2.3	140	120	
P.2.4	100	80	
P.3.1	130	120	
P.3.2	110	100	
P.3.3	90	80	
P.4.1	140	120	
P.4.2	120	110	
M.1.1	110	130	
M.2.1	100	120	
M.3.1	80	100	
K.1.1	300	200	140
K.1.2	240	180	115
K.2.1	200	120	150
K.2.2	160	100	110
K.3.1	190	120	170
K.3.2	160	100	140
N.1.1		300	500
N.1.2		200	330
N.2.1		250	370
N.2.2		220	330
N.2.3		200	280
N.3.1		300	350
N.3.2		300	350
N.3.3		200	320
N.4.1		200	320
S.1.1		70	
S.1.2		60	
S.2.1		35	
S.2.2		25	
S.2.3		30	
S.3.1		60	
S.3.2		50	
S.3.3		40	
H.1.1			
H.1.2			
H.1.3			
H.1.4			
H.2.1			
H.3.1			
O.1.1			160
O.1.2			
O.2.1			240
O.2.2			
O.3.1			

average chip thickness

h_m in mm

$$h_m = f_z \sqrt{\frac{a_e}{DC}}$$

Feed per tooth

f_z in mm

$$f_z = h_m \sqrt{\frac{DC}{a_e}}$$

Feed rate

v_f in mm/min

$$v_f = f_z \times ZNF \times n$$

DC = Ø of the disc cutters

ZNF = Number of teeth of the cutter

	Reference tool 50 386 12504 – ASLOT.125.R.8.32.DC-SX4											
	SX4 -F2				SX4 -M1				SX4 -M7			
	a_e	10	20	30	a_e	10	20	30	a_e	10	20	30
	hm	f_z in mm			hm	f_z in mm			hm	f_z in mm		
P	**0,08**	0,28	0,20	0,16	**0,1**	0,30	0,25	0,20	**0,09**	0,30	0,23	0,18
M	**0,05**	0,18	0,13	0,10					**0,06**	0,21	0,15	0,12
K					**0,12**	0,30	0,30	0,24	**0,09**	0,30	0,23	0,18
N	**0,08**	0,28	0,20	0,16								
S	**0,04**	0,14	0,10	0,08								
H												
O												

	Reference tool 50 386 12504 – ASLOT.125.R.8.32.DC-SX4							
	SX4 -M8				SX4 -27P			
	a_e	10	20	30	a_e	10	20	30
	hm	f_z in mm			hm	f_z in mm		
P	**0,08**	0,28	0,20	0,16				
M	**0,05**	0,18	0,13	0,10				
K					**0,06**	0,21	0,15	0,12
N	**0,08**	0,28	0,20	0,16	**0,09**	0,30	0,23	0,18
S	**0,04**	0,14	0,10	0,08				
H								
O					**0,05**	0,18	0,13	0,10

Caution: For narrower and wider indexable inserts, reduce or increase the feed per tooth accordingly!

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data for side and face milling cutters TX

Index	CWX500		CWK10
	v_c (m/min)	hm (mm)	v_c (m/min)
P.1.1	160	0,10	
P.1.2	140	0,10	
P.1.3	110	0,08	
P.1.4	110	0,10	
P.1.5	90	0,08	
P.2.1	110	0,10	
P.2.2	90	0,08	
P.2.3	90	0,10	
P.2.4	80	0,08	
P.3.1	80	0,05	
P.3.2	60	0,10	
P.3.3	50	0,08	
P.4.1	100	0,05	
P.4.2	90	0,08	
M.1.1	110	0,08	
M.2.1	90	0,08	
M.3.1	70	0,08	
K.1.1	140	0,10	
K.1.2	100	0,10	
K.2.1	90	0,08	
K.2.2	80	0,05	
K.3.1	140	0,10	
K.3.2	120	0,10	
N.1.1	600	0,12	250
N.1.2	400	0,12	230
N.2.1	220	0,10	210
N.2.2	180	0,10	190
N.2.3	140	0,10	120
N.3.1	240	0,12	200
N.3.2	200	0,12	180
N.3.3	180	0,12	160
N.4.1	180	0,12	160
S.1.1	60	0,05	
S.1.2	50	0,05	
S.2.1	60	0,05	
S.2.2	50	0,05	
S.2.3	40	0,05	
S.3.1	60	0,06	
S.3.2	40	0,06	
S.3.3	30	0,06	
H.1.1			
H.1.2			
H.1.3			
H.1.4			
H.2.1			
H.3.1			
O.1.1	180	0,10	160
O.1.2	180	0,10	160
O.2.1	150	0,10	120
O.2.2	110	0,10	100
O.3.1	170	0,10	160

average chip thickness

h_m in mm

$$h_m = f_z \sqrt{\frac{a_e}{DC}}$$

Feed per tooth

f_z in mm

$$f_z = h_m \sqrt{\frac{DC}{a_e}}$$

Feed rate

v_f in mm/min

$$v_f = f_z \times ZNF \times n$$

DC = Ø of the disc cutters

ZNF = Number of teeth of the cutter

Easy and safe clamping – with the CERATIZIT power screw



The fine-pitch part of the power screw is threaded into the milling cutter.



The power screw is turned carefully until the stop (as screw was delivered).



In order to guarantee an optimum connection of tool and shank, a gap of 4 mm is required between cutter body and adapter prior to final clamping. Using standardised adpaters this is automatically guaranteed. If necessary, you can read just by means of the power screw with 0.5 mm/rev.



Turn clamping screw to tighten

Torque moments for clamping screws for mounting the milling cutter to the shell mill adapter

	10				12				16			
Cutter Ø mm	ISK-Screw DIN 912	M_d Nm	Suits-screw Article no.	M_d Nm	ISK-Screw DIN 912	M_d Nm	Suits-screw Article no.	M_d Nm	ISK-Screw DIN 912	M_d Nm	Suits-screw Article no.	M_d Nm
40			70 950 151	15			70 950 151	15				
42			70 950 151	15			70 950 151	15				
50	M10x25	80			M10x25	80					70 950 154	20
52					M10x25	80					70 950 154	20
63					M10x25	80			M10x25	80		
66					M10x25	80			M10x25	80		

	12				16				20			
Cutter Ø mm	ISK-Screw DIN 912	M_d Nm	Suits-screw Article no.	M_d Nm	ISK-Screw DIN 912	M_d Nm	Suits-screw Article no.	M_d Nm	ISK-Screw DIN 912	M_d Nm	Suits-screw Article no.	M_d Nm
80	M12x30	140			M12x30	140			M12x30	140		
100	M16x35	180			M16x35	180			M16x35	180		
125					M16x35	180			M16x35	180		

15

Abbreviations & dimensions

a_e	cutting width	mm
a_p	Cutting depth	mm
DC	Tool diameter	mm
D_w	Workpiece diameter	mm
f_z	Feed per tooth	mm
h_m	Average Chip Thickness	mm
k	Number of teeth	
k_c	Specific cutting force	N/mm²
$k_{c1.1}$	Specific cutting force for 1 mm ² chip area	N/mm²
BS	Length of trailing edge land	mm
m_c	Increase of specific cutting force	
n	rpm	rpm
Q	Chip volume	cm³/min
v_c	Cutting speed	m/min
v_f	Feed rate	mm/min.
ZNF	Number of Effective Teeth	

γ_0	Effective cutting angle	degree
γ_f	Side clearance angle	degree
γ_p	Axial cutting angle	degree
κ	Cutting edge angle	degree
λ_s	Angle of inclination	degree
α	Clearance angle	degree
α_1	Side clearance angle	degree

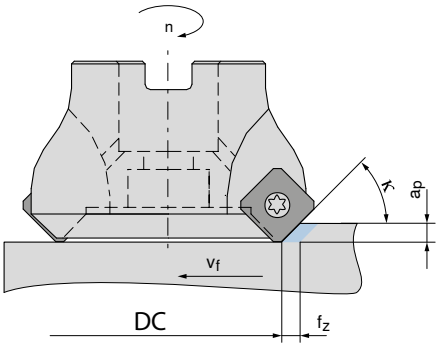

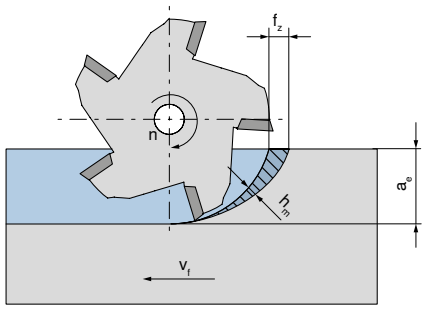

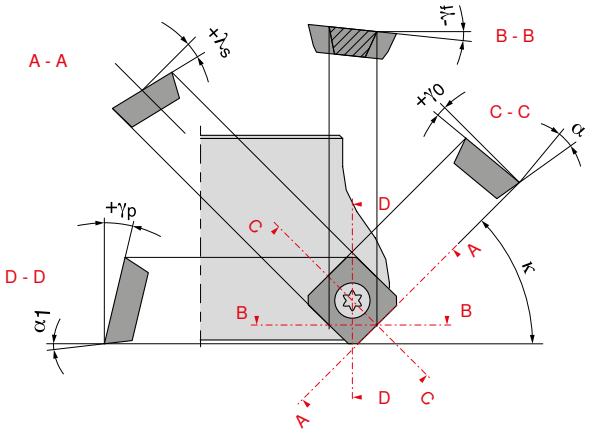



Trailing edge land

Main cutting edge

Corner radius

Engagement conditions

Recommended

Climb milling



The feed direction of the workpiece is the same as the direction of rotation of the milling cutter in the cutting zone. The chips have maximum thickness at the beginning, chip thickness then decreases until it becomes zero at the end of the cut.

Unsuitable

Conventional milling



The feed direction of the workpiece is opposite to the direction of rotation of the milling cutter in the cutting zone. Chip thickness is zero at the beginning and increases until it reaches its maximum at the end of the cut.

Cutter positioning



If possible the cutter should exit tangentially of the workpiece.



Workpiece situation



The workpiece should be clamped in such a way as to allow the cutter to emerge tangentially of the workpiece along the whole machining length.



Overlapping



Either employ climb milling or ensure that the cutter comes out of the workpiece tangentially, as in the illustration on the left.



Cutter size



When face milling the diameter of the cutter should be 20–30 % larger than that of the workpiece.



15

ISO designation indexable milling inserts

X	D	K	T	11	T3	08	S	R	-	F50
1	2	3	4	5	6	7	8	9		10

Z	N	H	W	12	05	PO	S	R	-	15	06	-	R
1	2	3	4	5	6	7	8	9		11	12		13

1 Insert shape

A	85°	
B	82°	
K	55°	
H	120°	
L	90°	
O	135°	
P	108°	
C	80°	
D	55°	
E	75°	
M	86°	
V	35°	
R		
S	90°	
T	60°	
W	80°	
X Z	Special version	

2 Clearance angle



	α
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
O	Special version

3 Tolerances



	IC ±mm	BS ±mm	S ±mm	IC = 6,35 / 9,52	IC = 12,7	IC = 15,8 / 19,05
A	0,025	0,005	0,025	●	●	●
C	0,025	0,013	0,025	●	●	●
E	0,025	0,025	0,025	●	●	●
F	0,013	0,005	0,025	●	●	●
G	0,025	0,025	0,13	●	●	●
H	0,013	0,013	0,025	●	●	●
J	0,05	0,005	0,025	●		
	0,08	0,005	0,025		●	
	0,10	0,005	0,025			●
K	0,05	0,013	0,025	●		
	0,08	0,013	0,02		●	
	0,10	0,013	0,02			●



	IC ±mm	BS ±mm	S ±mm	IC = 6,35 / 9,52	IC = 12,7	IC = 15,8 / 19,05
M	0,05	0,08	0,13	●		
	0,08	0,13	0,13		●	
	0,10	0,15	0,13			●
N	0,05	0,08	0,025	●		
	0,08	0,13	0,025		●	
	0,10	0,15	0,025			●
U	0,08	0,13	0,13	●		
	0,13	0,20	0,13		●	
	0,18	0,27	0,13			●

7 Trailing edge land / corner radius



Radius

	RE in mm
M0*	
02	0,2
04	0,4
08	0,8
12	1,2

* Only with insert type "R"



1. Designation

	K_r
A	45°
D	60°
E	75°
F	85°
P	90°
Z	Alternative



2. Designation

	α'_n
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
Z O	Alternative

8 Cutting edge

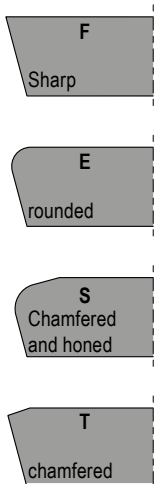

9 Direction of cut

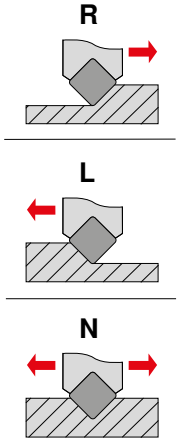

4

Characteristics

A	
F	
G	
M	
N	
Q	
R	
T	
U	
W	
X	Special version

5

Cutting length

IC mm	A	T	C/S	H	L	R	V	W	O	X	Z
4,90										07	
5,00						05					
5,56			05		08			03			
6,00											
6,35		11	06		10			04		06	
6,65	10										
6,80										11	
7,00											04
7,94			07								
8,00						08					
9,00					12						
9,30										15	
9,52	16	16	09		15			06	04		
9,57	15										
9,60										09	
10,00			10		11	10					12
12,00						12					
12,50										20	
12,70		12/22	12		20		22	08		12	
15,81			15		22			10			
16,00						16					
16,20				09							
16,74			16								
17,00			17								
17,18									06		
18,18									07		
19,05			19					13			
20,00						20					

6

Insert thickness



	S mm
01	1,59
T1	1,98
02	2,38
03	3,18
T3	3,97
04	4,76
05	5,56
06	6,35
07	7,94
09	9,52

10

Chip groove

Chip breaker designation
F.. = fine
M.. = medium
R.. = roughing

Additional characteristics:
R = transition radius main/ secondary cutting edge
Q = Smoothing edge

11

Manufacturer specification

Length of the finishing cutting edge



00 = 0,0 mm
10 = 1,0 mm
12 = 1,2 mm
15 = 1,5 mm
30 = 3,0 mm
50 = 5,0 mm

12

Manufacturer specification

$a_{p\,max}$



02 = 2,0 mm
03 = 3,0 mm
04 = 4,0 mm
06 = 6,0 mm
07 = 7,0 mm
11 = 11,0 mm

13

Manufacturer specification

F = Fine
M = Medium
R = Rough

15

Cutting demands when milling





Edge chipping

Cutting speed ↑
Feed per tooth ↓
Toughness of grade ↑
Cutting edge chamfer ↑



Wear on clearance face

Cutting speed ↓
Feed per tooth ↑
Abrasion resistant grade ↑





Cratering

Cutting speed ↓
Feed per tooth ↓
Abrasion resistant grade ↑





Built-up edge

Cutting speed ↑
Feed per tooth ↑
Wear resistance ↑





Cutting-edge deformation

Cutting speed ↓
Feed per tooth ↓
Abrasion resistant grade ↑





Cutting Edge Breakage

Cutting speed ↓
Toughness of grade ↑

Chip Breakers Overview



			Sharp ●		medium ● ●		stable ● ● ●	
			10	20	30	40	50	60
increasing wedge angle	fine	F	-F10 -27 -27P	-F20		-F40	-F50	-ER -FN -33P -33
	medium	M			-M31 -M30 -M32		-M50 -31	-EN -29
	rough	R			-R30		-R50	-SN -R60 -SR

Chip breaker code

			Cutting edge		
			Sharp	medium	stable
			10–20	30–40	50–60
Application type	light	F	●	● ●	● ● ●
	universal	M	●	● ●	● ● ●
	difficult	R	●	● ●	● ● ●

Example: Chip breaker -M50

Chip breaker description

-27P

- Highly positive geometry
- Ground, sharp cutting edge
- Low adhesion
- Recommendation for non-ferrous metals



-F10

- Highly positive geometry
- Ground, sharp cutting edge
- Low adhesion
- Recommendation for non-ferrous metals



-27

- Highly positive geometry
- Sharp cutting edges
- First choice for non-ferrous metals



-F20

- Highly positive geometry
- Lightly rounded cutting edge
- Recommendation for non-ferrous metals



-F40

- Positive geometry
- Rounded cutting edge
- Finish and rough machining
- For unstable clamping situations
- Recommendation for heat-resistant materials, titanium and super alloys



-F50

- Streamlined geometry with protective chamfer
- Rounded cutting edge
- Light rough machining
- For unstable clamping situations
- Recommendation for stainless steel materials



-33P

- Positive geometry with small neutral protective chamfer
- Low adhesion
- Rounded cutting edge
- Low cutting force and good stability
- For unstable clamping situations
- Light rough machining
- First choice for stainless steels



-M30

- Positive geometry
- Rounded cutting edge
- Medium rough machining
- For unstable clamping situations
- Recommendation for martensitic stainless steels (blade machining only with MaxiMill 251)



-M31

- Positive geometry
- Rounded cutting edge
- Finish and rough machining
- For unstable clamping situations
- For heat-resistant materials, titanium and super alloys



-M32

- Positive geometry
- Rounded cutting edge
- Low cutting force and good stability
- Medium rough machining
- First choice for martensitic stainless steels



-M50

- Universal geometry with protective chamfer
- Rounded cutting edge
- Light to medium rough machining
- Recommendation for general steel materials



-31

- Positive geometry with neutral protective chamfer
- Rounded cutting edge
- Heavy rough machining
- Strongly interrupted cuts
- First choice for cast iron materials



-29

- Positive geometry with slightly negative protective chamfer
- Rounded cutting edge
- Low cutting force and good stability
- Light to medium rough machining
- First choice for general steels



-33

- Positive geometry with small neutral protective chamfer
- Rounded cutting edge
- Low cutting force and good stability
- For unstable clamping situations
- Light rough machining
- First choice for stainless steels



Chip breaker description

-29R

- Positive geometry with slightly negative protective chamfer
- Heavily rounded cutting edge
- Low cutting force and good stability
- Light to medium rough machining
- First choice for general steels



-ER

- Neutral Geometry
- Rounded cutting edge
- Universal application
- High surface quality due to face chamfer
- First choice for machining cast iron and non-ferrous metals



-R30

- Slightly positive geometry
- Rounded cutting edge
- Medium rough machining
- Strongly interrupted cuts
- First choice for cast iron materials



-EN

- Neutral geometry
- Rounded cutting edge
- High surface quality due to face chamfer (radial protective chamfer on indexable insert)
- First choice for machining cast iron and non-ferrous metals



-R50

- Rugged geometry with protective chamfer
- Rounded cutting edge
- Rough machining
- Interrupted cuts
- Recommendation for cast iron materials



-SN

- Neutral geometry
- Rounded cutting edge
- High surface quality due to face chamfer (radial protective chamfer on indexable insert)
- Low cutting forces
- First choice for good flatness



-R60

- Rugged geometry with protective chamfer
- Rounded cutting edge
- Rough machining
- For stable clamping situations
- Recommendation for high-strength steel materials



-SR

- Neutral geometry with negative protective chamfer
- Rounded cutting edge
- Robust indexable insert
- For poor machining conditions
- First choice for machining cast iron and steels



-FN

- Neutral and highly stable geometry
- Heavily rounded cutting edge
- For stable machining conditions
- First choice for hard machining up to approx. 50 HRC



-FR

- Neutral Geometry
- Slightly rounded and stable cutting edge
- Associated with Ceramic and CBN cutting materials.
- For stable machining situations
- First choice for machining cast irons



Chip breaker description for MaxiMill Slot-SX

-27P

- Positive geometry
- Ground, sharp cutting edge
- Polished chip breaker
- Low cutting forces
- Fine to medium machining
- First choice for non-ferrous metals



-M8

- Extremely positive geometry
- Ground cutting edge
- Low cutting forces
- Fine to medium machining
- First choice for difficult-to-machine and stainless materials
- Alternatively, can also be used for non-ferrous metals



-F2

- Positive geometry
- Ground cutting edge
- Low cutting forces
- Fine to medium machining
- For stainless and steel materials



-M7

- Positive geometry
- Medium machining
- Universal application



-M1

- Stable cutting edge
- Medium to rough machining
- Best suited to steel materials



Grades Overview

Grade designation	Standard designation	ISO application range	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O
CTEP210	HE-P10	01 10 20 30 40 50 / 05 15 25 35 45	●		●				
	HE-K05								
TCM10	HT-P15		●		○				
	HT-K10								
WTN1205	HC-P10		●	○	●			●	
	HC-M15								
	HC-K05								
	HC-H10								
CTPP211	HC-P10		●	○	○	○	○	○	○
	HC-M15								
	HC-K10								
	HC-N10								
	HC-S15								
	HC-H10								
	HC-O10								
CTPP216	HC-P10		●	○	●	○	○	●	○
	HC-M20								
	HC-K15								
	HC-N15								
	HC-S20								
	HC-H15								
	HC-O15								
CTCP220	HC-P20		●		●				
	HC-K20								
CTPP225	HC-P25		●		●				
	HC-K25								
CTCP230	HC-P30		●		●				
	HC-K25								
CTPP231	HC-P30		●		○				
	HC-K25								
CTPP235	HC-P35		●	○	○				
	HC-M30								
	HC-K30								
CTPP236	HC-P35		●	○	○				
	HC-M35								
	HC-K30								
WAN1240	HC-P40		●	○	○				
	HC-M35								
	HC-K30								
WAX1240	HC-P30		●	○	○				
	HC-M25								
	HC-K25								
CTPM225	HC-P25		●	●					
	HC-M25								
WAN2225	HC-M25			●			●		
	HC-S30								
CTCM235	HC-P40		●	●					
	HC-M35								
CTPM240	HC-P40		○	●					
	HC-M40								
CWK10	HC-N10					●			○
	HC-O10								

● **Main Application**
○ Extended application

wear-resistant v_c+ ⟷ v_c– tough

Grades Overview

Grade designation	Standard designation	ISO application range	Steel P	Stainless steel M	Cast iron K	Non-ferrous metals N	Heat-resistant S	Tempered steel H	Non-metal materials O
CTPM241	HC-P40	01 05 10 15 20 25 30 35 40 45 50	●	●			○		
	HC-M40								
	HC-S40								
CTPM245	HC-P45		●	●					
	HC-M50								
CTCM245	HC-P45		●	●			○		
	HC-M50								
	HC-S35								
CTN3105	CN-K05				●				
CTL3215	BC-K10				●			○	
	BC-H10								
CTCK215	HC-K15				●				
CTPK220	HC-K20				●				
CTPK221	HC-P15		○		●				
	HC-K10								
CTPK226	HC-P15		●	●	●			○	
	HC-M20								
	HC-K15								
	HC-H15								
CTPK231	HC-P30		●	●	●	○	○	○	
	HC-M35								
	HC-K30								
	HC-N30								
	HC-S35								
	HC-H30								
CTD4205	DP-N05					●			○
	DP-O05								
CTPX715	HC-P15		○	○	●	●	○		○
	HC-M15								
	HC-K15								
	HC-N15								
	HC-S20								
	HC-O10								
WUN4210	HT-K10				○	●			
	HT-N15								
CTCN211	HC-N10					○			●
	HC-O10								
CTWN215	HC-K15				○	●			○
	HC-N10								
	HC-O10								
H216T	HW-K15				○	●			○
	HW-N15								
	HW-O15								
CTC5240	HC-S35						●		
CTCS245	HC-S45						●		
CTP6215	HC-K15				●			●	
	HC-H15								
CWX500	HC-P15		●	●	○	●	○		○
	HC-M15								
	HC-K15								
	HC-N15								
	HC-S15								
	HC-O15								

● **Main Application**
○ Extended application

wear-resistant v_c+ ⟷ v_c− tough

15

Grade description

CTEP210



P10 | **K05**

Specification:
Composition: Cermet Co/Ni 12.2%; mixed carbide 71.4%; others; WC balance | Fine grain size | Hardness: HV_{30} 1620 |
Layer system: CVD TiCN-Al_3O_3
Application:
Coated Cermet grade with reserves of toughness for finish machining at high cutting speeds

TCM10

P15 | K10

Specification:
Composition: Co/Ni 12.2%; WC 15; TaNbC10.0%; TiCn balance | Hardness: HV_{30} 1620 | Layer system: uncoated
Application:
Uncoated Cermet grade for the finishing of hardened steel

CTN3105



CN-K05

Specification:
Composition: ß – Si_3N_4 | Fine grain size | Hardness: HV_{30} 1620 | Layer system: uncoated
Application:
Universal silicon nitride for the machining of cast iron materials

CTL3215



BC-K10 | BC-H10

Specification:
Composition: Cubic boron nitride (CBN) | 85 vol. + metallic binder phase | Cutting system: PVD
Application:
Coated cubic boron nitride with very good cutting toughness and good wear resistance for the machining of cast iron materials

CTCP220



HC-P20 | **HC-K20**

Specification:
Composition: Co 8.0%; mixed carbide 2.0%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1500 |
Layer system: CVD TiCN-Al_3O_2
Application:
Dry machining, high cutting speed + more wear resistant grades to CTCP230
Material example:
Low material strength up to approx. 250 HB / 840 N/mm²

CTPP225



HC-P25 | **HC-K25**

Specification:
Composition: Co 8.0%; mixed carbide 2.0%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1500 | Layer system: PVD TiAlTaN
Application:
Dry or wet machining, face milling of steel materials, higher cutting speeds + more wear resistant grades to CTPP235
Material example:
Medium material strength up to approx. 300 HB / 1000 N/mm²

CTCP230



HC-P30 | HC-M25 | **HC-K25**

Specification:
Composition: Co 10.5%; mixed carbide 2.0%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1400 |
Layer system: CVD TiCN-Al_2O_3
Application:
Dry machining, universal grade for higher cutting speeds

CTPP235



HC-P35 | HC-M30

Specification:
Composition: Co 10.5%; mixed carbide 2.0%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1400 | Layer system: PVD TiAlTaN
Application:
Wet machining, universal grade for medium cutting speeds

Grade description

CTPM225



HC-P25 | **HC-M25**

Specification:
Composition: Co 9.0%; mixed carbide 0.75%; WC balance | Fine grain size 0.7-1µm | Hardness: HV_{30} 1590 | Layer system: PVD TiAlTaN
Application:
Dry or wet machining at medium cutting speeds
Material example:
Austenitic stainless steels

CTCM235



HC-P40 | **HC-M35**

Specification:
Composition: Co 12.5%; mixed carbide 2.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1380 | Layer system: CVD TiCN-Al_2O_3
Application:
Dry machining for medium cutting speeds
Material example:
Martensitic stainless steels

CTPM240



HC-P40 | **HC-M40**

Specification:
Composition: Co 12.0%; mixed carbide 2.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1380 | Layer system: PVD TiAlTaN
Application:
Wet machining, universal grade for higher cutting speeds
Material example:
Austenitic stainless steels

CTPM245



HC-P45 | **HC-M45**

Specification:
Composition: Co 10.0%; others 1.5%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1330 | Layer system: PVD TiAlTaN
Application:
Dry or wet machining
Material example:
High-alloy martensitic and austenitic stainless steel

CTCM245



HC-P45 | **HC-M50** | HC-S35

Specification:
Composition: Co 10.0%; others 1.5%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1330 | Layer system: CVD TiCN-Al_2O_3
Application:
Dry machining
Material example:
High-alloy martensitic and austenitic stainless steel

CTCK215



HC-K15

Specification:
Composition: Co 6.0%; mixed carbide 2.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1630 | Layer system: CVD TiCN-Al_2O_3
Application:
Special grade for the dry machining of cast iron materials at high cutting speeds
Material example:
Cast iron materials such as GG25 and GGG40

CTPK220



HC-K20

Specification:
Composition: Co 6.0%; mixed carbide 2.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1630 | Layer system: PVD TiAlTaN
Application:
Special grade for the wet machining of cast iron materials in demanding application ranges
Material example:
High-strength cast iron materials such as GGG50 and GGG70

CTD4205



DP-N05

Specification:
Composition: Polycrystalline diamond (PKD) | grain size 2-5µm | Layer system: uncoated
Application:
For the machining of aluminium and non-ferrous metals
Material example:
Non-ferrous metals such as AlMgSi1

Grade description

CTWN215 (H216T)



K15 | **N15** | O15

Specification:
Composition: Co 6.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1650 | Layer system: uncoated
Application:
Uncoated carbide for the machining of aluminium and non-ferrous metals
Material example:
Non-ferrous metals such as AlMgSi1

CTPX715



ISO | **P15** | **M15** | K15 | **N15** | **S20** | O10

Specification:
Composition: Co 6.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1650 | Layer system: PVD AlTiN
Application:
For the machining of aluminium and non-ferrous metals
Material example:
Non-ferrous metals such as AlMgSi1 or GGG30 cast iron

CTC5240



HC-S40

Specification:
Composition: Co 10.0%; WC balance | Medium grain size 2µm | Hardness: HV_{30} 1330 | Layer system: CVD TiN-TiB_2
Application:
Special wet machining grade for the machining of titanium materials
Material example:
Titanium Ti6Al4V

CTCS245



HC-S45

Specification:
Composition: Co 12.0%; mixed carbide 1.8%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1260 | Layer system: CVD TiN-TiB_2
Application:
Wet machining special grade for the machining of nickel-based alloys or the dry machining of austenitic stainless steels
Material example:
Heat-resistant materials such as Inconel, Rene, Nimonic, etc.

CTP6215



HC-H15 | **HC-K15**

Specification:
Composition: Co 12.0%; WC balance | Ultra-fine grain size 0.4µm | Hardness: HV_{30} 1630 | Layer system: PVD TiAlN
Application:
For the machining of high-strength martensitic tool steels 400HB / 1300 N/mm^2
Material example:
Tool steel 1.2379, 1.2312

CTPK231



P30 | **M35** | **K30** | N30 | S35 | H30

Specification:
Composition: Co 9.8%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1612 | Layer system: PVD TiN / TiAlN / ZS / TiAlN / Al_2O_3 / TiN
Application:
Dry machining, tough carbide grade for the medium and rough machining of steel and cast iron metals

CTPP216



P10 | M20 | **K15** | N15 | S20 | **H15** | O15

Specification:
Composition: Co 9.6%; WC balance | Fine grain size 0,7-1µm | Hardness: HV_{30} 1824 | Layer system: PVD TiN / TiAlN / DS
Application:
Highly wear-resistant carbide grade with high cutting edge stability for the machining of high-strength materials, non-alloyed tool steels, cast iron and hardened steel up to 54 HRC

CTPK226



P10 | M20 | **K15** | H15

Specification:
Composition: Co 11.6%; WC balance | Fine grain size 0.7-1µm | Hardness: HV_{30} 1711 | Layer system: PVD TiN / AlTiN / DS
Application:
Highly wear-resistant ultra-fine grain carbide grade for the machining of cast iron metals and hardened steels up to 62 HRC

Grade description

CTCN211



N10 | **O15**

Specification:
Composition: Co 6.5%; WC balance | Fine grain size 0.7-1µm | Hardness: HV_{30} 1827 | Layer system: PVD diamond
Application:
Diamond-coated carbide grade for the machining of graphite and non-ferrous metals

WAN1240



P40 | M35 | K30

Specification:
Composition: Co 9%; mixed carbide 3.8%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1449 | Layer system: PVD TiAlN / TiN
Application:
Tough special grade for the machining of steel at medium to high cutting speeds. Also suitable for the machining of cast iron in secondary applications

WAN2225



M25 | **S25**

Specification:
Composition: Co 11.3%; WC balance | Medium grain size 2µm | Hardness: HV_{30} 1307 | Layer system: PVD TiAlN / TiN
Application:
Dry and wet machining, fine grain grade with high toughness and temperature resistance. For rough and finish machining of rust and acid-resistant steels

WUN4210



K15 | **N10** | O10

Specification:
Composition: Co 8.1%; WC balance | Fine grain size 0.7-1µm | Hardness: HV_{30} 1715 | Layer system: uncoated
Application:
Uncoated carbide for the machining of aluminium and non-ferrous metals
Material example:
Non-ferrous metals such as AlMgSi1

WAX1240



P40 | M25 | K30

Specification:
Composition: Co 10.5%; mixed carbide 2.1%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1345 |
Layer system: CVD TiN / TiCN / TiN / Al_2O_3
Application:
High-strength special grade for medium and rough machining at medium cutting speeds and extreme feed rates per tooth

WTN1205



P10 | M15 | **K05** | **H10**

Specification:
Composition: Co 7.3%; WC balance | Fine grain size 0.7-1µm | Hardness: HV_{30} 1801 | Layer system: PVD TiN / TiAlN
Application:
Special grade for the machining of steel, hardened steel, cast iron, and non-ferrous metals and graphite

CTPP231



P30 | K25

Specification:
Composition: Co 9.5%; mixed carbide 2%; WC balance | Medium grain size 2-3µm | Hardness: HV_{30} 1400 | Layer system: PVD TiAlN
Application:
A very tough special grade for the medium and rough machining of steel at medium cutting speeds and extremely high feed rates

CTPP211



P10 | M15 | K10 | N10 | S15 | H10 | O10

Specification:
Co 6.3%; WC balance | Fine grain size 0.7-1µm | Hardness: HV_{30} 1843 | Layer system: PVD TiN / TiAlN / ZS / TiAN / Al_2O_3 / ZS / TiN
Application:
universal grade for medium cutting speeds

Grade description

CTPP236



P35 | M35 | K30

Specification:
Composition: Co 9.5%; mixed carbide 2%; WC balance | Medium grain size 2-3µm | Hardness: HV_{30} 1370 | Layer system: PVD TiAlN
Application:
Tough special grade for the medium and rough machining of steel at high cutting speeds. Also suitable for the machining of cast iron and stainless steels in secondary applications

CTPK221



P15 | **K10**

Specification:
Composition: Co 6%; WC balance | Medium grain size 1µm | Hardness: HV_{30} 1600 | Layer system: PVD TiAlN
Application:
Standard grade for the fine machining of cast iron and non-ferrous metals at medium cutting speeds

CTPM241



P40 | **M40** | S40

Specification:
Composition: Co 12%; WC balance | Medium grain size 1-2µm | Hardness: HV_{30} 1450 | Layer system: PVD TiAlN
Application:
Tough special grade for the machining of stainless and heat-resistant steels

CTP1340



ISO | **P30** | **K30** | N30 | **S30** | O30

Specifications:
Composition: Co 9.0%; mixed carbide 0.75%; WC balance | grain size: 0.7–1 µm | Hardness: HV_{30} 1590 | Layer system: PVD TiAlTaN

Recommended use:
The universal high-performance grade for steels, austenitic steel, cast iron materials and heat-resistant alloys

CTCP335



ISO | **P35** | M30 | **K35**

Specifications:
Composition: Co 10.5%; mixed carbide 1.9%; WC balance | grain size: 1 µm | Hardness: HV_{30} 1370 |
Layer system: CVD TiCN-Al_2O_3 Multilayer

Recommended use:
The reliable choice for machining steel and cast iron materials.

CWK10



N10 | O10

Specification:
Composition: Co 6.0%; WC balance | Fine grain size 1µm | Hardness: HV_{30} 1650 | Layer system: uncoated
Application:
Uncoated carbide for the machining of aluminium and non-ferrous metals
Material example:
Non-ferrous metals such as AlMgSi1

CWX500



ISO | **P30** | **M30** | **K35** | **N35** | **S15** | H05 | **O10**

Specification:
Composition: Co 10.0%; Others 0.7 %, WC balance | Grain size: 1 µm | Hardness: HV_{30} 1660

Recommended application:
The universal carbide grade for almost all materials

Grade description

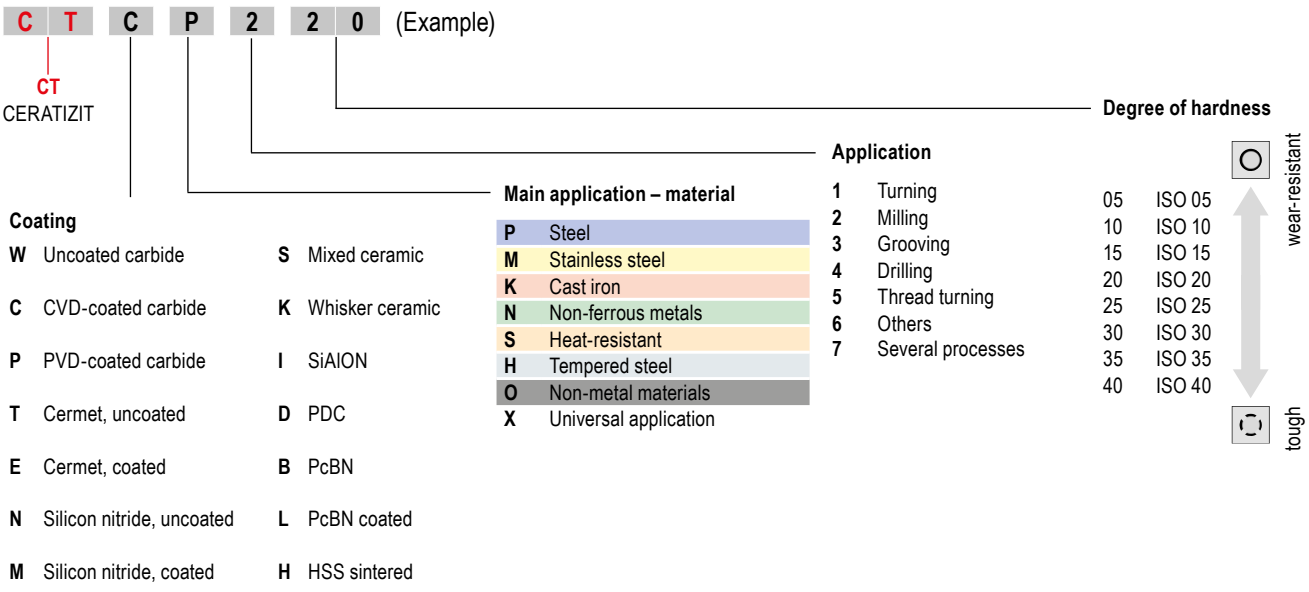

New products for machining technicians

NEW High pressure chuck

HyPower – Rough

- For highly dynamic milling operations
- Best results when using tools with a HA shank
- Maximum process security, even for high-quality components
- Developed for the requirements of a wide range of markets (including tool and die production, aerospace and the automotive sector)

HyPower – Access 4,5°

- For reaming and drilling applications as well as finishing during milling operations
- Maximum flexibility when machining components critical to contours
- Developed for the requirements of a wide range of markets (including tool and die production, aerospace and the automotive sector)

NEW PSC parting blade holders and square shank holders with DirectCooling

Our new DirectCooling turning and grooving tool holders in specially tailored PSC adapters. The DirectCooling interface is perfectly adapted and the holders have been specially developed for these tools.

NEW VDI holders with DirectCooling

The VDI holder with DirectCooling is incredibly versatile owing to its 4-in-1 functionality. Thanks to its double tooth profile, only one holder is needed. The clamping rails can be attached at the top or bottom, as an optional extra.

NEW Shell mill adapter

These shell mill adapters, which were developed specially for the MaxiMill 211-KN porcupine cutters, are being added to our product range. Now the porcupine cutters can be securely clamped thanks to the adapted flange diameters.

NEW Torsional vibration dampers with ABS connection

The popular and very useful torsional vibration damper with ABS connection has been supplemented with the PSC interface. This extension is enhancing our complete range and we can now also clamp without an adapter directly on machines with the PSC interface.

NEW BMT holders with DirectCooling



We have expanded our portfolio to include various BMT systems with DirectCooling.

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories **16**

17 Workpiece clamping

18 Material examples and article no. Index

Table of contents

Symbol explanation 4

Toolfinder

Machine interface 5
Rotating toolholders 6+7
Adapters, stationary
– HSK-T and PSC tool holders 8+9
– VDI adapters for star turrets 10
– VDI adapters for disc turrets 11
– BMT tool holders 12
Accessories 13

Product programme

Adapters and accessories 14–302

Technical Information

Driven Tools 303+304
Quick-Change 305+306
Technical data – ISO 7388-1 / ISO 7388-2 / ISO 26623-1 307
Technical data – ISO 12164 308
Technical Information for Polygon Shank Adapters 309
HyPower / HyTens 310–312
Static clamping moments / Centro-P and HDC ER precision collet chucks 313
Technical information – ABS 314
Compensation holder DAH 315

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Coolant supply version

without coolant supply (Form A)

Coolant supply central
Steep taper Form AD

Coolant supply either via the flange, or central (Form AD/B)

with eroded cooling ducts

Direct Cooling
DC = DirectCooling

TG
specially matched adapter for ThermoGrip® shrinking process

Coolant supply centrally or via the collar
with eroded cooling channels

Adapter with two additional coolant holes

Coolant supply centrally or via the collar
also additional coolant holes

Central coolant supply or via a coolant nozzle

ER-B
2 µm
Collet description
▲ Type version
▲ Radial run-out accuracy

Toolfinder – Machine interface

ISO 7388-1 – SK steep taper holders



- ▲ SK 30
- ▲ SK 40
- ▲ SK 50
- ▲ SK-FC 50

Toolfinder – Adapters, rotating 6+7
Product programme 14–60

ISO 7388-2 – MAS-BT taper shank

MAS-BT / MAS-BT-FC with face contact



- ▲ BT 30
- ▲ BT 40
- ▲ BT 50
- ▲ BT-FC 30
- ▲ BT-FC 40
- ▲ BT-FC 50

Toolfinder – Adapters, rotating 6+7
MAS-BT product range 61–101 / 110+111
MAS-BT-FC product range 102–109

HSK hollow taper adapters with face contact

ISO 12164 – HSK-A / HSK-E



- ▲ HSK-A 40
- ▲ HSK-A 50
- ▲ HSK-A 63
- ▲ HSK-A 100
- ▲ HSK-E 25
- ▲ HSK-E 32
- ▲ HSK-E 40
- ▲ HSK-E 50

Toolfinder – Adapters, rotating 6+7
HSK-A product range 112–152 / 156
HSK-E product range 153–155

ISO 12164-3 – HSK-T

- ▲ HSK-T 63
- ▲ HSK-T 100

Toolfinder – Adapters, stationary 8+9
Product programme 193–195

ISO 26623-1 – PSC polygon hollow adapters with face contact

PSC, rotating

- ▲ PSC 32
- ▲ PSC 40
- ▲ PSC 50
- ▲ PSC 63
- ▲ PSC 80

Toolfinder – Adapters, rotating 6+7
Product programme 157–176

PSC, stationary

- ▲ PSC 32
- ▲ PSC 40
- ▲ PSC 50
- ▲ PSC 63
- ▲ PSC 80
- ▲ PSC 80X

Toolfinder – Adapters, stationary 8+9
Product programme 198–204

ISO 10889 – VDI tool holders with cylindrical shank



- ▲ VDI 16
- ▲ VDI 20
- ▲ VDI 25
- ▲ VDI 30
- ▲ VDI 40
- ▲ VDI 50

Toolfinder – Adapters, stationary 10+11
Product programme 205–226
Driven Tools 303+304

BMT tool holders



- ▲ Doosan/Spinner – BMT 45
- ▲ Doosan – BMT 55
- ▲ EMAG – BMT 55
- ▲ HAAS/Doosan – BMT 65
- ▲ Mori/Seiki – BMT 40
- ▲ Mori/Seiki – BMT 60
- ▲ Mazak – BMT 68

Toolfinder – Adapters, stationary – BMT tool holders 12
Product programme 227–240

Toolfinder – Adapters, rotating

Holder Type		ISO 7388-1 SK	ISO 7388-1 SK-FC	ISO 7388-2 MAS-BT	ISO 7388-2 MAS-BT-FC	ISO 12164 HSK-A	ISO 12164 HSK-E	ISO 26623-1 PSC	ABS	Morse taper	Cylindrical shank
Accuracy											
Maximum											
ER Precision Collet chuck											
▲ Centro-P		14–16		61–63	102	112–114	153+154	157			252
▲ HDC		17		64	103	115					
HyPower – High Pressure Milling Chuck		18–21		65–68	105	116–119		158			
HyTens – Hydraulic chuck		22+23		69+70	120–122	120+122			177		248+249
Heat Shrink Adapter		30–29		71–75	104	123–130	155	159–161	178		247
Micro-Precision Collet Chuck											250
High											
Cylindrical shank adapter											
▲ Weldon		30–32		76+78	106	131+132		162	179		251
▲ Whistle Notch		33+34		79+80		133		163	180+181		
Indexable insert drill adapter		42		81		134		164			
Collet Chuck											
▲ Precision Collet chuck – PCC		36		82		135					
▲ ER Collet chuck		37+38		83	107	136+137		165+166	182		253+254
Short drill chuck		39		84		138		167	183	243	243
Quick change tapping chuck											
▲ With minimum length compensation		40+41		85+86		139		168	184		244
▲ with length compensation		42		87		140		169	183	245	245
ABS adapters		43+44	45	88–90	108	141+142		170+171	187–191		84 232 ...
Compensation holder DAH		The DAH length compensation chucks are available in our online shop. Technical information on the products can be found on **page 315**.									

Main Application	Finishing	Roughing - Finishing	Roughing
Extended application			

Toolfinder – Adapters, rotating

Holder Type	ISO 7388-1 SK	ISO 7388-1 SK-FC	ISO 7388-2 MAS-BT	ISO 7388-2 MAS-BT-FC	ISO 12164 HSK-A	ISO 12164 HSK-E	ISO 26623-1 PSC	ABS	Morse taper	Cylindrical shank
Accuracy										
Medium										
Adapter for milling cutters with threaded end	46+47		91		143+144		172			255+256
Face mill adapter										
▲ Combination shell mill adapter	48		92		145			186		
▲ Shell mill adapter	49–51		93–95	109	146–148		173	185		
▲ Large diameter facemill adapter	52		96							
Drill chuck adapter									242	
Taper adapter for Morse taper	53		97		149		174		242	
Adapter										
▲ SK	54									
▲ MAS-BT			98							
▲ HSK-A	55		99		150					
▲ PSC	56		100		151		202+203			
Blank	57		101		152		175	192		
Test bar	57		101		152		176			

Main Application		Finishing		Roughing - Finishing		Roughing
Extended application						

16

Toolfinder – Stationary adapters – HSK-T and PSC tool holders

Toolholders for negative turning inserts

	Type Machining	Article no.	Illustration
CN..	DCLN 95° Internal + External	74 503 + 74 504	
	DCMN 95° External	74 506	
	DCMN+ DDMN External	74 600	

All tool holders for negative rotary indexable inserts CN..
can be found in → **Section 9, Turning Tools**

DN..	DCMN+ DDMN External	74 600	
	DDUN 93° Internal + External	74 515 + 74 516	
	DDJN 93° Internal + External	74 511 + 74 512	
	DDHN 107,5° Internal + External	74 507 + 74 508	
	DDMN 48° External	74 519	

All tool holders for negative rotary indexable inserts DN..
can be found in → **Section 9, Turning Tools**

SN..	DSDN 45° External	74 522	
VN..	DVMN 50° External	74 525	
WN..	DWLN 95° Internal + External	74 528 + 74 529	

All tool holders for negative rotary indexable inserts SN.., VN.. and WN..
can be found in → **Section 9, Turning Tools**

Toolholders for positive turning inserts

	Type Machining	Article no.	Illustration
CC..	SCLC 95° Internal + External	74 540 + 74 541	
	SCMC 50° External	74 542	

All tool holders for positive rotary indexable inserts CC..
can be found in → **Section 9, Turning Tools**

DC..	SDJC 93° Internal + External	74 543 + 74 544	
	SDNC 62,5° Internal + External	74 677	
	SDMC 48° External	74 546	

All tool holders for positive rotary indexable inserts DC..
can be found in → **Section 9, Turning Tools**

RC..	PRDC 0° External	74 548	
	PRSC Internal + External	74 551 + 74 552	

All tool holders for positive rotary indexable inserts RC..
can be found in → **Section 9, Turning Tools**

VC..	SVUC 93° Internal + External	74 557 + 74 558	
	SVJC 93° Internal + External	74 555 + 74 556	
	SVHC 107,5° Internal + External	74 553 + 74 554	
	SVMC 50° External	74 560	

All tool holders for positive rotary indexable inserts VC..
can be found in → **Section 9, Turning Tools**

You can find more information on the multifunction tool EcoCut in
→ **Section 10, Multifunctional Tools – EcoCut and FreeTurn**



2,25xD

Toolfinder – Stationary adapters – HSK-T and PSC tool holders

Holders for grooving and threading inserts

Type	Article no.	Illustration
0°	74 580 + 74 581	

All tool holders for grooving and threading inserts can be found in
→ **Section 11, Grooving tools**

Toolholders for threading inserts

Type	Article no.	Illustration
Internal thread	84 196 + 84 197	
External thread	84 190 + 84 191	

All tool holders for threading inserts can be found in
→ **Section 8, Thread turning**

Boring bars for negative inserts

	Type	Article no.	Illustration
CN..	DCLN 95°	74 528 + 74 529	
DN..	DDUN 93°	74 532 + 74 533	
WN..	DWLN 95°	74 536 + 74 537	

All boring bars for negative indexable inserts can be found in
→ **Section 9, Turning Tools**

Boring bars for positive inserts

	Type	Article no.	Illustration
CC..	SCLC 95°	74 563 + 74 564	
DC..	SDUC 93°	74 565 + 74 566	
VC..	SVUC 93°	74 567 + 74 568	
	SVQC 107,5°	70 748 + 70 749	

All boring bars for positive indexable inserts can be found in
→ **Section 9, Turning Tools**

Basic holder

Type	Illustration		HSK-T ISO 12164	PSC ISO 26623
Square shank holder 0°		Direct Cooling	194+195	196
				198
Square shank holder 45°		Direct Cooling	194+195	197
				199
Square shank holder 90°		Direct Cooling	194+195	197
				198
Square shank holder 2 face 0°				199
Square shank holder 3 face 0°			195	199
Boring bar holder			195	200

Parting blade holders

Type	Illustration		HSK-T ISO 12164	PSC ISO 26623
Parting blade holder 0°		Direct Cooling	193	196
Parting blade holder 90°		Direct Cooling	193	196
				198

Accessories

Protection plug		204
Hollow nose keys		204

16

Toolfinder – Stationary adapters – VDI adapters for star turrets







Toolholders above

Upper turret		Spindle rotation clockwise		Spindle rotation counter clockwise	
	Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C1/C2/D1/D2	205–207 209–212	B2/B3/B6/B7/C3/C4/D1/D2	205–207 209–212
	Parting blade holders / DirectCooling	double	208 216+217	double – overhead	208 216+217
	Adapter VDI to VDI	Left-hand	222	Left-hand	222
	Boring bar holder	Left-hand	222	Left-hand	222

Lower turret		Spindle rotation clockwise		Spindle rotation counter clockwise	
	Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C3/C4/D1/D2	205–207 209–212	B2/B3/B6/B7/C1/C2/D1/D2	205–207 209–212
	Parting blade holders / DirectCooling	double – overhead	208 216+217	double	208 216+217
	Adapter VDI to VDI	Right-hand	222	Right-hand	222
	Boring bar holder	Right-hand	222	Right-hand	222

Toolholders below

Upper turret		Spindle rotation clockwise		Spindle rotation counter clockwise	
	Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C3/C4/D1/D2	205–207 209–212	B2/B3/B6/B7/C1/C2/D1/D2	205–207 209–212
	Parting blade holders / DirectCooling	double	208 216+217	double – overhead	208 216+217
	Adapter VDI to VDI	Right-hand	222	Right-hand	222
	Boring bar holder	Right-hand	222	Right-hand	222

Lower turret		Spindle rotation clockwise		Spindle rotation counter clockwise	
	Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C1/C2/D1/D2	205–207 209–212	B2/B3/B6/B7/C3/C4/D1/D2	205–207 209–212
	Parting blade holders / DirectCooling	double – overhead	208 216+217	double	208 216+217
	Adapter VDI to VDI	Left-hand	222	Left-hand	222
	Boring bar holder	Left-hand	222	Left-hand	222

Toolfinder – Stationary adapters – VDI adapters for disc turrets







Upper turret		Spindle rotation clockwise		Spindle rotation counter clockwise	
	Square Shank Adapters / DirectCooling	B1/B5/C1/C2/D1	205–207 209–212	B3/B7/C3/C4/D2	205–207 209–212
	Part Off Holder	Right-hand	208 216+217	Overhead right	208 216+217

Lower turret		Spindle rotation clockwise		Spindle rotation counter clockwise	
	Square Shank Adapters / DirectCooling	B4/B8/C3/C4/D2	205–207 209–212	B2/B6/C1/C2/D1	205–207 209–212
	Part Off Holder	Overhead left	208 216+217	Left-hand	208 216+217

General VDI adapters			
	Cylindrical Shank Adapters	E/E1/E2/E3/E4	212–214
	Taper Adapters	F1	215
	Short drill chuck	NC 2010	218
	ER Collet chuck		215
	Hydraulic chuck		219
	VDI to PSC adapter		223
	VDI to HSK-T adapter		224
	VDI adapter with ABS-N connection	This article can be found in our online shop at cuttingtools.ceratizit.com	84 231 ...

Accessories		
	Test arbors	220
	Tool holders	220
	Bar pullers	225
	Gripper accessories	226
	Protection plug	226

16

Toolfinder – Adapters, stationary – BMT tool holders

Doosan/Spinner – BMT 45

	Axial square section tool holder	Left-hand	Direct Cooling	227
	Square section adapter	Left-hand	Direct Cooling	227
	Square multiple tool holder		Direct Cooling	228
	Combi tool holder	with thro' coolant		228

Mori/Seiki – BMT 40

	Axial square section tool holder	Left-hand	Direct Cooling	235
	Square section adapter	Left-hand	Direct Cooling	235
	Square multiple tool holder		Direct Cooling	236
	Combi tool holder	with thro' coolant		236

Doosan – BMT 55

	Axial square section tool holder	Left-hand	Direct Cooling	229
	Square section adapter	Left-hand	Direct Cooling	229
	Square multiple tool holder		Direct Cooling	230
	Boring bar holder	with thro' coolant		230

Mori/Seiki – BMT 60

	Axial square section tool holder	Left-hand	Direct Cooling	237
	Square section adapter	Left-hand	Direct Cooling	237
	Square multiple tool holder		Direct Cooling	238
	Combi tool holder	with thro' coolant		238

EMAG – BMT 55

	Axial square section tool holder	Left-hand	Direct Cooling	231
	Square section adapter	Left-hand	Direct Cooling	231
	Boring bar holder	with thro' coolant		232

HAAS/Doosan – BMT 65

	Axial square section tool holder	Left-hand	Direct Cooling	233
	Square section adapter	Left-hand	Direct Cooling	233
	Square multiple tool holder		Direct Cooling	234
	Combi tool holder	with thro' coolant		234

Mazak – BMT 68

	Axial square section tool holder	Left-hand	Direct Cooling	239
	Square section adapter	Left-hand	Direct Cooling	239
	Square multiple tool holder		Direct Cooling	240
	Combi tool holder	with thro' coolant		240

Toolfinder – accessories

Type			Page No.
Pull stud	SK		58–60
	MAS-BT		110+111
	PSC		176
Coolant pipe/key	HSK-A		156
	PSC		176
Drill chuck with internal taper			241
Tap clamping sleeve for Weldon adapters			246
Extension for Shell mill arbors			262
Milling adapter ring			263
Lock nuts ER-Standard and ER-Mini			287
Y clamping key and ER-Mini clamping key			287
Spare parts Centro-P			285
Roll key			286
ER collets			268–278
Sealing discs			280+281

Type		Page No.
Spare parts for VDI		264–266
Spare parts driven tools		267
Quick change applications		288–292
Reduction sleeve and reducing bushings		282+283
3D tester and zero setting device		299+300
Cleaning propeller		302
TORX® screwdrivers, TORX® interchangeable blades, TORX® bit holders and adapters		294–298
Assembly device for SK, HSK and PSC adapters		284
MultiChange – Holder		259–261
MultiChange key		293
Cool-jet		301
Taper wiper		284

16

ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

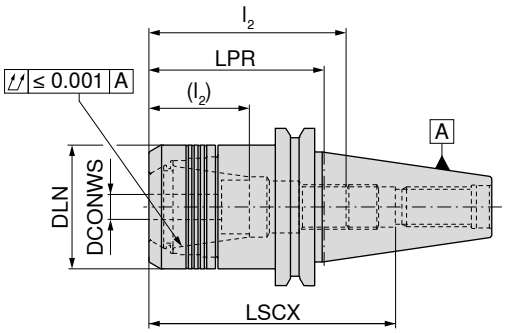

AD
G 2,5 n_{max} 25000

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	84 424 ... EUR Y8		84 414 ... EUR Y8	
SK 30	2 - 16	70	40	66	35 - 49 (18 - 31)	430E (ER25)	155,50	**016**		
SK 40	1 - 10	70	30	110	28 - 45 (16 - 31)	426E (ER16)	116,70	**102**		
SK 40	1 - 10	100	30	140	28 - 45 (16 - 31)	426E (ER16)	129,70	**103**		
SK 40	1 - 10	130	30	140	28 - 50 (14 - 34)	426E (ER16)			177,60	**510**
SK 40	1 - 10	160	30	200	28 - 45 (16 - 31)	426E (ER16)			200,90	**910**
SK 40	2 - 16	45	40	85	35 - 60 (20 - 42)	430E (ER25)			141,30	**816**
SK 40	2 - 16	70	40	110	35 - 60 (20 - 42)	430E (ER25)	116,70	**162**		
SK 40	2 - 16	100	40	113	35 - 60 (20 - 42)	430E (ER25)	129,70	**163**		
SK 40	2 - 16	130	40	140	38 - 67 (21 - 49)	430E (ER25)			190,50	**516**
SK 40	2 - 16	160	40	118	35 - 60 (20 - 42)	430E (ER25)			213,90	**916**
SK 40	2 - 20	50	50	85	52 - 70 (26 - 52)	470E (ER32)	123,20	**201**		
SK 40	2 - 20	70	50	111	55 - 75 (42 - 62)	470E (ER32)	116,70	**202**		
SK 40	2 - 20	100	50	114	52 - 70 (32 - 52)	470E (ER32)	129,70	**203**		
SK 40	2 - 20	130	50	114	50 - 74 (36 - 55)	470E (ER32)			190,50	**620**
SK 40	2 - 20	160	50	119	52 - 70 (32 - 52)	470E (ER32)			213,90	**920**
SK 40	3 - 26	70	63	105	48 - 55	472E (ER40)	155,60	**261** [1)]		
SK 50	2 - 16	100	40	150	35 - 64 (20 - 48)	430E (ER25)	258,00	**167**		
SK 50	2 - 20	70	50	120	59 - 85 (40 - 70)	470E (ER32)			213,90	**320**
SK 50	2 - 20	100	50	150	53 - 81 (35 - 63)	470E (ER32)			258,00	**520**
SK 50	2 - 20	130	50	150	53 - 81 (35 - 63)	470E (ER32)			324,50	**52100**
SK 50	2 - 20	160	50	200	53 - 83 (35 - 65)	470E (ER32)			369,50	**720**
SK 50	3 - 26	70	63	120	48 - 60	472E (ER40)			226,90	**26600**
SK 50	3 - 26	100	63	90	48 - 70	472E (ER40)			274,60	**26700**
SK 50	3 - 26	130	63	90	47 - 57	472E (ER40)			337,60	**26800**
SK 50	3 - 26	160	63	90	47 - 57	472E (ER40)			387,50	**26900**

1) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 3 mm longer

Spare parts
ER precision collet chuck – Centro-P

	Lock nut IK		Lock nut			Stop screw 2			Stop screw 1	
	84 950 ...		84 950 ...			83 950 ...			83 950 ...	
Spare parts for collet	EUR Y8		EUR Y8			EUR Y8			EUR Y8	
426E (ER16)	45,38	011	36,28	001	M11x1 - SW6	18,15	341	M11x1 - SW6	12,81	337
430E (ER25)	49,29	013	40,16	003	M18x1,5 - SW6	20,50	432	M18x1,5 - SW6	14,72	431
470E (ER32)	51,87	015	42,72	005	M22x1,5 - SW6	20,50	402	M22x1,5 - SW6	14,72	401
472E (ER40)	70,01	017	58,34	007				M28x1,5 - SW6	13,34	400

ER Precision tapered collet chuck – Centro-P

- ▲ for special tapered nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** nut, **without** backstop

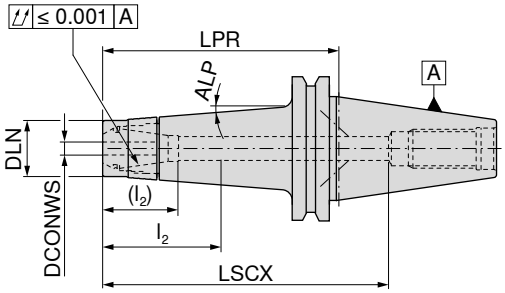

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	ALP	84 417 ... EUR Y8	
SK 40	1 - 10	100	24	140	28 - 48 (20 - 35)	426E (ER16)	4,5°	147,70	410
SK 40	1 - 10	130	24	105	28 - 48 (20 - 35)	426E (ER16)	3,5°	189,10	61000
SK 40	1 - 10	160	24	200	28 - 48 (20 - 35)	426E (ER16)	2,5°	197,00	910

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

	Tapered lock nut IK		Tapered lock nut			Stop screw 2			Stop screw 1	
	84 950 ...		84 950 ...			83 950 ...			83 950 ...	
Spare parts for collet	EUR Y8		EUR Y8			EUR Y8			EUR Y8	
426E (ER16)	53,16	033	42,72	031	M11x1 - SW6	18,15	341	M11x1 - SW6	12,81	337

Accessories

ER collet
→ 268–276, 279


Sealing ring
→ 280

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 58, 60

Others
→ 284

ER Precision collet chuck, slim version – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** nut, **without** backstop

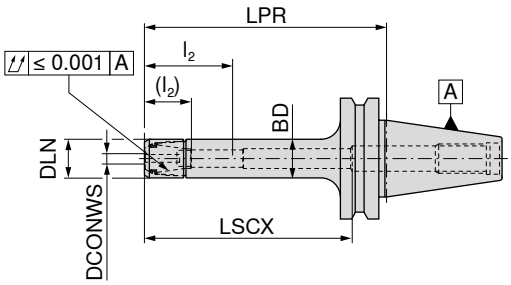

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	BD mm	LSCX mm	l_2 (l_2) mm	for collet	**84 412 ...** EUR Y8	
SK 40	1 - 7	70	16	16	60	15 - 32 (7 - 22)	4008E (ER11)	151,70	**207**
SK 40	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	151,70	**407**
SK 40	1 - 7	130	16	16	110	15 - 32 (7 - 22)	4008E (ER11)	201,00	**607**
SK 40	1 - 7	160	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	224,30	**907**
SK 40	1 - 10	70	22	22	90	28 - 50 (14 - 36)	426E (ER16)	151,70	**210**
SK 40	1 - 10	100	22	22	110	28 - 50 (14 - 36)	426E (ER16)	151,70	**310**
SK 40	1 - 10	130	22	22	140	28 - 50 (14 - 36)	426E (ER16)	201,00	**410**
SK 40	1 - 10	160	22	22	170	28 - 50 (14 - 36)	426E (ER16)	224,30	**510**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK **84 950 ...** EUR Y8		Mini lock nut **84 950 ...** EUR Y8		Stop screw 2 **83 950 ...** EUR Y8		Stop screw 1 **83 950 ...** EUR Y8	
4008E (ER11)			42,72	**041**	M8x1 - SW4	17,45 **340**	M8x1 - SW4	12,81 **336**
426E (ER16)	53,15	**035**	42,72	**034**	M11x1 - SW6	18,15 **341**	M11x1 - SW6	12,81 **337**

Accessories



ER collet	Sealing ring	Device	Roll key	Roll key device	Pull studs	Others
→ 268–276, 279	→ 280	→ 285	→ 286	→ 286	→ 58, 60	→ 284

ER precision collet chuck – HDC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body **including** lock nut, **without** backstop screw

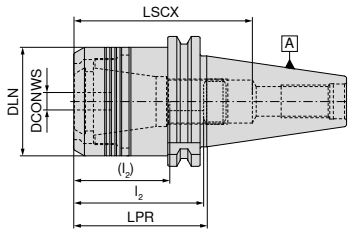

cylindrical



Conical

AD
G 6,3 n_{max} 18000
cylindrical

AD
G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	84 400 ... EUR Y8		84 400 ... EUR Y8	
SK 40	2 - 20	65	53	85	41 - 65 (27 - 47)		470E (ER32)	210,20	**12079**		
SK 50	2 - 20	70	53	91	41 - 71 (27 - 53)	10	470E (ER32)			337,90	**12078**
SK 50	2 - 20	100	53	121	41 - 74 (27 - 56)	10	470E (ER32)			394,60	**22078**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2

Lock nut

Stop screw 2

Stop screw 1

Spare parts DCONWS	84 950 ... EUR Y8			83 950 ... EUR Y8			83 950 ... EUR Y8	
2 - 20	90,88	**30100**	M22x1,5 - SW6	20,50	**402**	M22x1,5 - SW6	14,72	**401**

Accessories

ER collet
→ 268–276, 278–279

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 58, 60

Others
→ 284

16

HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

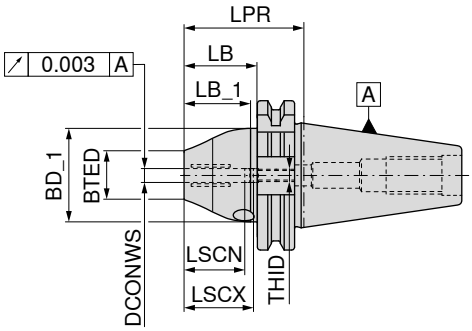

NEW

AD/B
G 2,5 n_{max} 25000

84 254 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
SK 40	6	50,0	26	42	27,1	30,9	37	27	M5	384,30	**10679**
SK 40	8	50,0	28	42	27,1	30,9	37	27	M6	384,30	**10879**
SK 40	10	50,0	30	42	27,1	30,9	41	31	M8x1	384,30	**11079**
SK 40	12	50,0	32	49	27,1	30,9	46	36	M10x1	384,30	**11279**
SK 40	16	64,5	38	49	41,6	45,4	49	39	M12x1	384,30	**11679**
SK 40	20	64,5	38	49	41,6	45,4	51	41	M16x1	384,30	**12079**

→ Min. clamping depth, Page 312

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 58, 60

Others
→ 284

HyPower – Complus

▲ High pressure chuck, short and stable version
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

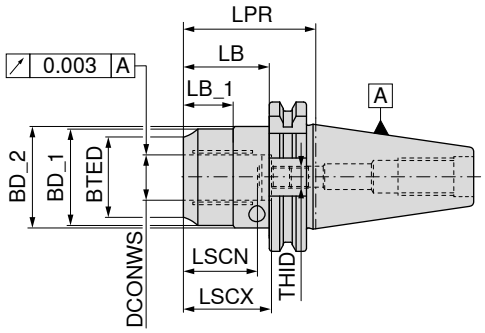

NEW

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB mm	LB_1 mm	LSCX mm	LSCN mm	THID		83 427 ... EUR Y8	
SK 40	20	64,5	38					51	40	M16x1x13,5		310,90	**120**
SK 40	32	81,0	57	63	70	61,9	26	61	51	M16x1x13,5		302,70	**13279**
SK 50	20	64,5	38	49		45,4		51	41	M16x1x13,5		359,60	**12078**
SK 50	32	81,0	57	68	72	61,9	35	61	51	M16x1x13,5		359,60	**13278**

→ Min. clamping depth, Page 312

Cylindrical screw

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.		83 950 ... EUR Y7			80 397 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
83 427 13279	M5x5 - SW2,5	2,39	**157**	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**
83 427 12078	M5x5 - SW2,5	2,39	**157**	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**
83 427 13278	M5x5 - SW2,5	2,39	**157**	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 58, 60

Others
→ 284

HyPower – Access 3°

▲ High pressure chuck, slim 3°
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw, pressure screw and screw plug

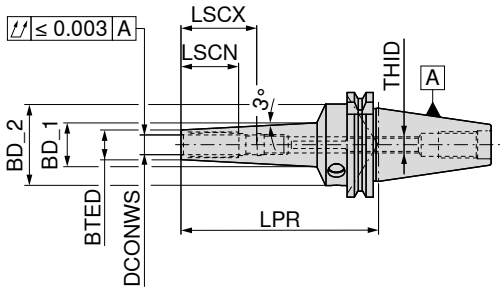

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	THID	83 421 ... EUR Y8	
medium length	SK 40	3	120	9	17,40	49,5	28	12	M3	538,10	103
	SK 40	4	120	10	18,40	49,5	28	16	M3	538,10	104
	SK 40	5	120	11	19,40	49,5	28	20	M3	538,10	105
	SK 40	6	120	12	20,40	49,5	37	27	M5	458,30	106
	SK 40	8	120	14	22,40	49,5	37	27	M6	458,30	108
	SK 40	10	120	16	24,50	49,5	41	31	M8x1	458,30	110
	SK 40	12	120	18	26,60	49,5	46	36	M10x1	458,30	112
	SK 40	16	120	24	32,30	49,5	49	39	M12x1	742,10	116
	SK 40	20	120	28	36,40	49,5	51	41	M16x1	742,10	120
	SK 40	6	160	16	34,37	49,5	37	27	M5	661,20	206
	SK 40	8	160	18	35,45	49,5	37	27	M6	661,20	208
	SK 40	10	160	20	37,10	49,5	41	31	M8x1	661,20	210
	SK 40	12	160	22	38,72	49,5	46	36	M10x1	661,20	212
	SK 40	6	200	16	38,72	49,5	37	27	M5	782,70	306
	SK 40	8	200	18	39,74	49,5	37	27	M6	782,70	308
	SK 40	10	200	20	41,40	49,5	41	31	M8x1	782,70	310
	SK 40	12	200	22	43,02	49,5	46	36	M10x1	782,70	312

→ Min. clamping depth, Page 312

Cylindrical screw

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.		83 950 ... EUR Y7			80 397 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
83 421 103	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M3x20 - SW1,5	10,86	172
83 421 104	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M3x20 - SW1,5	10,86	172
83 421 105	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M3x20 - SW1,5	10,86	172
83 421 106	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M5x12,5 - SW2,5	10,45	418
83 421 108	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M6x12,5 - SW3	10,45	419
83 421 110	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 421 112	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M10x1x13,5 - SW5	10,45	421
83 421 116	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M12x1x13,5 - SW5	10,45	422
83 421 120	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M16x1x13,5 - SW8	12,04	424
83 421 206	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M5x12,5 - SW2,5	10,45	418
83 421 208	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M6x12,5 - SW3	10,45	419
83 421 210	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 421 212	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 421 306	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M5x12,5 - SW2,5	10,45	418
83 421 308	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M6x12,5 - SW3	10,45	419
83 421 310	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 421 312	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420

HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

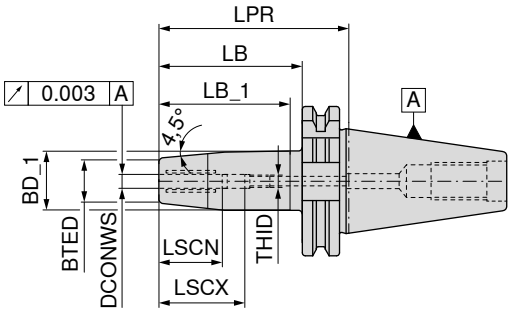

NEW

AD/B
G 2,5 n_{max} 25000

84 255 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
SK 40	6	80	21	27	55,7	60,9	37	27	M5	459,90	**10679**
SK 40	8	80	21	27	55,7	60,9	37	27	M6	459,90	**10879**
SK 40	10	80	24	32	55,7	60,9	41	31	M8x1	459,90	**11079**
SK 40	12	80	24	32	55,7	60,9	46	36	M10x1	459,90	**11279**
SK 40	16	80	27	34	55,8	60,9	49	39	M12x1	459,90	**11679**
SK 40	20	80	33	42	57,2	60,9	51	41	M16x1	459,90	**12079**

→ Min. clamping depth, Page 312

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 58, 60

Others
→ 284

HyTens – Fit

▲ Hydraulic chuck, short and slim version
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

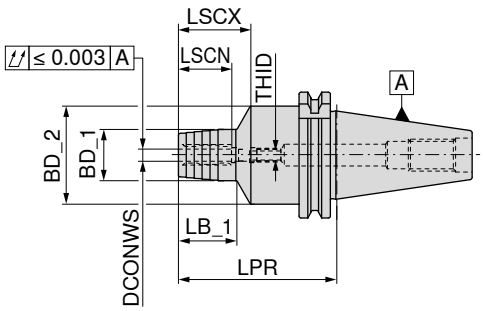

AD/B
G 2,5 n_{max} 25000

83 402 ...

Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	LB_1 mm	THID	EUR Y8	
SK 40	6	80,5	26	49,5	37	27	29,5	M5	474,50	**106**
SK 40	8	80,5	28	49,5	37	27	30,0	M6	474,50	**108**
SK 40	10	80,5	30	49,5	41	31	35,0	M8x1	474,50	**110**
SK 40	12	80,5	32	49,5	46	36	40,0	M10x1	412,30	**112**
SK 40	16	80,5	38	49,5	49	39	45,0	M12x1	474,50	**116**
SK 40	20	80,5	42	49,5	51	41	47,0	M16x1	412,30	**120**
SK 40	25	80,5	55	63,0	57	47	28,0	M16x1	474,50	**125**
SK 40	32	80,5	63	70,0	61	51	25,5	M16x1	474,50	**132**
SK 50	6	80,5	26	49,5	37	27	29,5	M5	663,70	**306**
SK 50	8	80,5	28	49,5	37	27	30,0	M6	663,70	**308**
SK 50	10	80,5	30	49,5	41	31	35,0	M8x1	663,70	**310**
SK 50	12	80,5	32	49,5	46	36	40,0	M10x1	601,70	**312**
SK 50	16	80,5	38	49,5	49	39	45,0	M12x1	663,70	**316**
SK 50	20	80,5	42	49,5	51	41	42,0	M16x1	601,70	**320**
SK 50	25	100,0	55	63,0	57	47	48,0	M16x1	663,70	**325**
SK 50	32	100,0	63	70,0	61	51	51,0	M16x1	663,70	**332**

→ Min. clamping depth, Page 312

Pressure screw

Stop screw IK

Stop screw IK

Spare parts DCONWS									
		83 950 ...			**83 950 ...**			**83 950 ...**	
		EUR Y7			EUR Y7			EUR Y7	
6	M8x1x10	7,07	**439**				M5x12,5 - SW2,5	10,45	**418**
8	M8x1x10	7,07	**439**	M6x14 - SW2	10,45	**417**	M6x12,5 - SW3	10,45	**419**
10	M10x1x12	7,07	**440**				M8x1x13,5 - SW3	10,45	**420**
12	M10x1x12	7,07	**440**				M10x1x13,5 - SW5	10,45	**421**
16	M10x1x12	7,07	**440**				M12x1x13,5 - SW5	10,45	**422**
20 - 32	M10x1x12	7,07	**440**				M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 58, 60

Others
→ 284

HyTens – Compact

▲ Hydraulic chuck, short and stable version
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

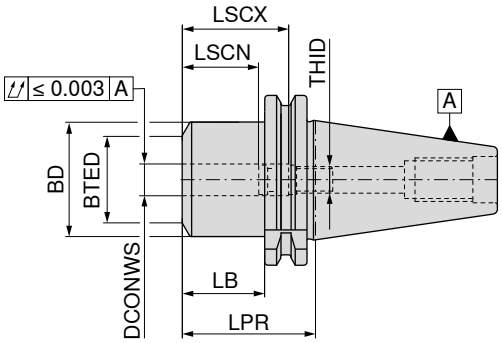

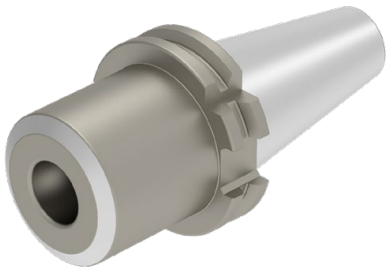

AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCN mm	LSCX mm	THID		83 430 ... EUR Y8	
SK 40	12	50,0	42	32	31,0	46	56	M8x1		196,40	**01279**
SK 40	20	64,5	49	38	45,5	41	51	M16x1		196,40	**02079**
SK 50	20	64,5	49	38	45,5	41	51	M16x1		351,00	**02078**

→ Min. clamping depth, Page 312

Clamping key – T

Pressure screw

Stop screw IK

Spare parts DCONWS		80 397 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
12	SW5	5,46	**050**	M10x1x12	7,07	**440**	M8x1x13,5 - SW3	10,45	**420**
20	SW5	5,46	**050**	M10x1x12	7,07	**440**	M16x1x13,5 - SW8	12,04	**424**

Heat shrink adapter, slim 3°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

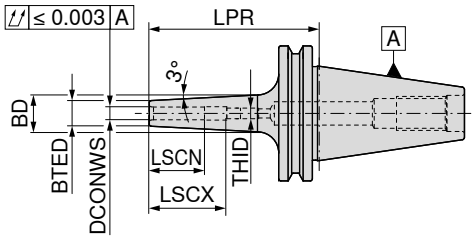

AD/B
G 2,5 n_{max} 25000

84 320 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	SK 40	3	80	9	14	28	12	M6	196,10	**103**
	SK 40	4	80	10	15	28	16	M6	190,60	**104**
	SK 40	5	80	11	16	30	20	M6	190,60	**105**
	SK 40	6	80	12	17	36	26	M5	166,20	**106**
	SK 40	8	80	14	19	36	26	M6	166,20	**108**
	SK 40	10	80	16	21	41	31	M8x1	166,20	**110**
	SK 40	12	80	18	23	47	37	M10x1	166,20	**112**
	SK 40	14	80	20	26	47	37	M10x1	166,20	**114**
	SK 40	16	80	22	28	50	40	M12x1	166,20	**116**
	SK 40	18	80	24	30	50	40	M12x1	166,20	**118**
	SK 40	20	80	26	32	52	42	M16x1	166,20	**120**
medium length	SK 40	3	120	9	16	12	12		220,30	**203**
	SK 40	4	120	10	17	16	16		213,70	**204**
	SK 40	5	120	11	18	20	20		213,70	**205**
	SK 40	6	120	12	22	36	26	M5	192,00	**206**
	SK 40	8	120	14	24	36	26	M6	192,00	**208**
	SK 40	10	120	16	26	41	31	M8x1	192,00	**210**
	SK 40	12	120	18	28	47	37	M10x1	192,00	**212**
	SK 40	14	120	20	30	47	37	M10x1	192,00	**214**
	SK 40	16	120	22	32	50	40	M12x1	192,00	**216**
	SK 40	18	120	24	34	50	40	M12x1	192,00	**218**
	SK 40	20	120	26	36	52	42	M16x1	192,00	**220**
extra-long	SK 40	3	160	9	19	12	12		248,70	**303**
	SK 40	4	160	10	20	16	16		243,30	**304**
	SK 40	5	160	11	21	20	20		243,30	**305**
	SK 40	6	160	12	24	36	26	M5	221,80	**306**
	SK 40	8	160	14	26	36	26	M6	221,80	**308**
	SK 40	10	160	16	28	41	31	M8x1	221,80	**310**
	SK 40	12	160	18	30	47	37	M10x1	221,80	**312**
	SK 40	14	160	20	32	47	37	M10x1	221,80	**314**
	SK 40	16	160	22	34	50	40	M12x1	221,80	**316**
	SK 40	18	160	24	36	50	40	M12x1	221,80	**318**
	SK 40	20	160	26	38	52	42	M16x1	221,80	**320**

→ Min. clamping depth, Page 312

Stop screw IK

Stop screw IK

83 950 ...

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y7	
3 - 5	M6x14 - SW2	10,45	**417**			
6				M5x12,5 - SW2,5	10,45	**418**
8				M6x12,5 - SW3	10,45	**419**
10				M8x1x13,5 - SW3	10,45	**420**
12 - 14				M10x1x13,5 - SW5	10,45	**421**
16 - 18				M12x1x13,5 - SW5	10,45	**422**
20				M16x1x13,5 - SW8	12,04	**424**

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

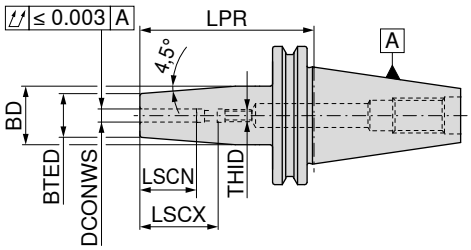

AD/B
G 2,5 n_{max} 25000

84 300 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	SK 40	3	80	10	17	22	12	M6	143,20	**103**
	SK 40	4	80	15	22	26	16	M6	143,20	**104**
	SK 40	5	80	15	22	30	20	M6	143,20	**105**
	SK 40	6	80	21	27	36	26	M5	136,60	**106**
	SK 40	8	80	21	27	26	26	M6	136,60	**108**
	SK 40	10	80	24	32	41	31	M8x1	136,60	**110**
	SK 40	12	80	24	32	47	37	M10x1	136,60	**112**
	SK 40	14	80	27	34	47	37	M10x1	136,60	**114**
	SK 40	16	80	27	34	50	40	M12x1	136,60	**116**
	SK 40	18	80	33	42	50	40	M12x1	136,60	**118**
	SK 40	20	80	33	42	52	42	M16x1	136,60	**120**
	SK 40	25	100	44	53	58	48	M16x1	136,60	**125**
medium length	SK 40	3	120	10	20	12	12		171,70	**203**
	SK 40	4	120	15	22	16	16		171,70	**204**
	SK 40	5	120	15	22	20	20		171,70	**205**
	SK 40	6	120	21	27	36	26	M5	171,70	**206**
	SK 40	8	120	21	27	36	26	M6	171,70	**208**
	SK 40	10	120	24	32	41	31	M8x1	171,70	**210**
	SK 40	12	120	24	32	47	37	M10x1	171,70	**212**
	SK 40	14	120	27	34	47	37	M10x1	171,70	**214**
	SK 40	16	120	27	34	50	40	M12x1	171,70	**216**
	SK 40	18	120	33	42	50	40	M12x1	171,70	**218**
	SK 40	20	120	33	42	52	42	M16x1	171,70	**220**
	SK 40	25	120	44	53	58	48	M16x1	173,00	**225**
extra-long	SK 40	3	160	10	20	12	12		235,20	**303**
	SK 40	4	160	15	22	16	16		229,80	**304**
	SK 40	5	160	15	22	20	20		229,80	**305**
	SK 40	6	160	21	27	36	26	M5	205,50	**306**
	SK 40	8	160	21	27	36	26	M6	205,50	**308**
	SK 40	10	160	24	32	41	31	M8x1	205,50	**310**
	SK 40	12	160	24	32	47	37	M10x1	205,50	**312**
	SK 40	14	160	27	34	47	37	M10x1	205,50	**314**
	SK 40	16	160	27	34	50	40	M12x1	205,50	**316**
	SK 40	18	160	33	42	50	40	M12x1	205,50	**318**
	SK 40	20	160	33	42	52	42	M16x1	205,50	**320**
	SK 40	25	160	44	53	58	48	M16x1	205,50	**325**

→ Min. clamping depth, Page 312

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

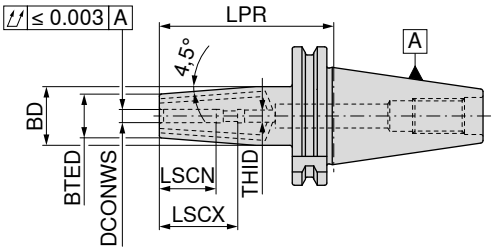

AD/B – 2KMB
G 2,5 n_{max} 25000

84 317 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	SK 40	3	80	10	17	28	12	M6	209,70	**103**
	SK 40	4	80	15	22	28	16	M6	202,80	**104**
	SK 40	5	80	15	22	30	20	M6	202,80	**105**
	SK 40	6	80	21	27	36	26	M5	178,50	**106**
	SK 40	8	80	21	27	36	26	M6	178,50	**108**
	SK 40	10	80	24	32	41	31	M8x1	178,50	**110**
	SK 40	12	80	24	32	47	37	M10x1	178,50	**112**
	SK 40	14	80	27	34	47	37	M10x1	178,50	**114**
	SK 40	16	80	27	34	50	40	M12x1	178,50	**116**
	SK 40	18	80	33	42	50	40	M12x1	178,50	**118**
	SK 40	20	80	33	42	52	42	M16x1	178,50	**120**
	SK 40	25	100	44	53	58	48	M16x1	178,50	**125**
	SK 40	32	100	44	53	62	52	M16x1	178,50	**132**

→ Min. clamping depth, Page 312

Stop screw IK

83 950 ...

Stop screw IK

83 950 ...

Sealing screw

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y7			EUR Y7	
3 - 5	M6x14 - SW2	10,45	**417**				M2x6	0,61	**512**
6				M5x12,5 - SW2,5	10,45	**418**	M2x6	0,61	**512**
8				M6x12,5 - SW3	10,45	**419**	M2x6	0,61	**512**
10				M8x1x13,5 - SW3	10,45	**420**	M2x6	0,61	**512**
12 - 14				M10x1x13,5 - SW5	10,45	**421**	M2x6	0,61	**512**
16 - 18				M12x1x13,5 - SW5	10,45	**422**	M2x6	0,61	**512**
20 - 25				M16x1x13,5 - SW8	12,04	**424**	M2x6	0,61	**512**
32	M16x1 - SW5	6,20	**511**				M2x6	0,61	**512**

Accessories

Shrink fit extension
→ 247

Pull studs
→ 58, 60

Others
→ 284

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

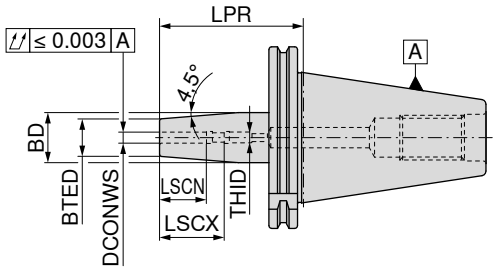

AD/B
G 2,5 n_{max} 25000

84 301 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	SK 50	6	80	21	27	36	26	M5	231,30	**106**
	SK 50	8	80	21	27	36	26	M6	231,30	**108**
	SK 50	10	80	24	32	41	31	M8x1	231,30	**110**
	SK 50	12	80	24	32	47	37	M10x1	231,30	**112**
	SK 50	14	80	27	34	47	37	M10x1	231,30	**114**
	SK 50	16	80	27	34	50	40	M12x1	231,30	**116**
	SK 50	18	80	33	42	50	40	M12x1	231,30	**118**
	SK 50	20	80	33	42	52	42	M16x1	231,30	**120**
	SK 50	25	100	44	53	58	48	M16x1	231,30	**125**
	SK 50	32	100	44	53	62	52	M16x1	231,30	**132**
medium length	SK 50	6	120	21	27	36	26	M5	252,80	**206**
	SK 50	8	120	21	27	36	26	M6	252,80	**208**
	SK 50	10	120	24	32	41	31	M8x1	252,80	**210**
	SK 50	12	120	24	32	47	37	M10x1	252,80	**212**
	SK 50	14	120	27	34	47	37	M10x1	252,80	**214**
	SK 50	16	120	27	34	50	40	M12x1	252,80	**216**
	SK 50	18	120	33	42	50	40	M12x1	252,80	**218**
	SK 50	20	120	33	42	52	42	M16x1	252,80	**220**
	SK 50	25	120	44	53	58	48	M16x1	252,80	**225**
	SK 50	32	120	44	53	62	52	M16x1	252,80	**232**
extra-long	SK 50	6	160	21	27	36	26	M5	282,60	**306**
	SK 50	8	160	21	27	36	26	M6	282,60	**308**
	SK 50	10	160	24	32	41	31	M8x1	282,60	**310**
	SK 50	12	160	24	32	47	37	M10x1	282,60	**312**
	SK 50	14	160	27	34	47	37	M10x1	282,60	**314**
	SK 50	16	160	27	34	50	40	M12x1	282,60	**316**
	SK 50	18	160	33	42	50	40	M12x1	282,60	**318**
	SK 50	20	160	33	42	52	42	M16x1	282,60	**320**
	SK 50	25	160	44	53	58	48	M16x1	282,60	**325**
	SK 50	32	160	44	53	62	52	M16x1	282,60	**332**

→ Min. clamping depth, Page 312

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7	
6	M5x12,5 - SW2,5	10,45	**418**
8	M6x12,5 - SW3	10,45	**419**
10	M8x1x13,5 - SW3	10,45	**420**
12 - 14	M10x1x13,5 - SW5	10,45	**421**
16 - 18	M12x1x13,5 - SW5	10,45	**422**
20 - 32	M16x1x13,5 - SW8	12,04	**424**

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** backstop screw

TG

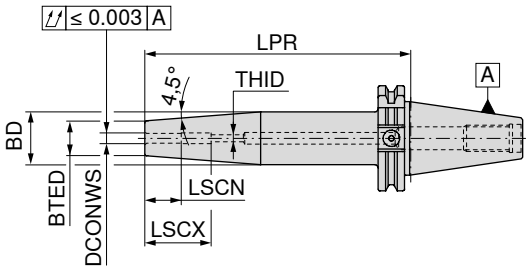

AD/B
G 2,5 n_{max} 25000

82 310 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8/3B	
short	SK 40	3	70	12	17,0				127,90	**10379**
	SK 40	4	70	12	17,0				127,90	**10479**
	SK 40	5	70	12	17,0				127,90	**10579**
	SK 40	6	80	21	30,5	36	26	M5	122,20	**10679**
	SK 40	8	80	21	30,5	36	26	M6	122,20	**10879**
	SK 40	10	80	24	33,5	41	31	M8x1	122,20	**11079**
	SK 40	12	80	24	33,5	47	37	M10x1	122,20	**11279**
	SK 40	14	80	27	36,5	47	37	M10x1	122,20	**11479**
	SK 40	16	80	27	36,5	50	40	M12x1	122,20	**11679**
	SK 40	18	80	33	42,5	50	40	M12x1	122,20	**11879**
	SK 40	20	80	33	42,5	52	42	M16x1	122,20	**12079**
	SK 40	25	100	44	50,0	58	48	M16x1	122,20	**12579**
	SK 50	6	80	21	27,0	36	26	M5	181,30	**10678**
	SK 50	8	80	21	27,0	36	26	M6	181,30	**10878**
	SK 50	10	80	24	32,0	41	31	M8x1	181,30	**11078**
	SK 50	12	80	24	32,0	47	37	M10x1	181,30	**11278**
	SK 50	14	80	27	34,0	47	37	M10x1	181,30	**11478**
	SK 50	16	80	27	34,0	50	40	M12x1	181,30	**11678**
	SK 50	18	80	33	42,0	50	40	M12x1	181,30	**11878**
	SK 50	20	80	33	42,0	52	42	M12x1	181,30	**12078**
	SK 50	25	100	44	53,0	58	48	M16x1	181,30	**12578**
	SK 50	32	100	44	53,0	62	52	M16x1	181,30	**13278**
medium length	SK 40	3	120	12	17,0				154,20	**20379**
	SK 40	4	120	12	17,0				154,20	**20479**
	SK 40	5	120	12	17,0				154,20	**20579**
	SK 40	6	120	21	31,0	36	26	M5	154,20	**20679**
	SK 40	8	120	21	32,0	36	26	M6	154,20	**20879**
	SK 40	10	120	24	34,0	41	31	M8x1	154,20	**21079**
	SK 40	12	120	24	34,0	47	37	M10x1	154,20	**21279**
	SK 40	16	120	27	36,0	50	40	M12x1	154,20	**21679**
	SK 40	20	120	33	44,0	52	42	M16x1	154,20	**22079**
	SK 50	6	120	21	27,0	36	26	M5	199,00	**20678**
	SK 50	8	120	21	27,0	36	26	M6	199,00	**20878**
	SK 50	10	120	24	32,0	41	31	M8x1	199,00	**21078**
	SK 50	12	120	24	32,0	47	37	M10x1	199,00	**21278**
	SK 50	14	120	27	34,0	47	37	M10x1	199,00	**21478**
	SK 50	16	120	27	34,0	50	40	M12x1	199,00	**21678**
	SK 50	18	120	33	42,0	50	40	M12x1	199,00	**21878**
	SK 50	20	120	33	42,0	52	42	M16x1	199,00	**22078**
	SK 50	25	120	44	53,0	58	48	M16x1	199,00	**22578**
	SK 50	32	120	44	53,0	62	52	M16x1	199,00	**23278**

→ Min. clamping depth, Page 312

Continued on next page

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** backstop screw

TG

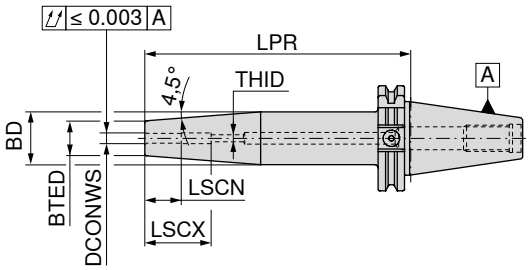

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	82 310 ... EUR Y8/3B	
extra-long	SK 40	6	160	21	31,0	36	26	M5	183,90	30679
	SK 40	8	160	21	32,0	36	26	M6	183,90	30879
	SK 40	10	160	24	34,0	41	31	M8x1	183,90	31079
	SK 40	12	160	24	34,0	47	37	M10x1	183,90	31279
	SK 40	14	160	27	36,0	47	37	M10x1	183,90	31479
	SK 40	16	160	27	36,0	50	40	M12x1	183,90	31679
	SK 40	18	160	33	44,0	50	40	M12x1	183,90	31879
	SK 40	20	160	33	44,0	52	42	M16x1	183,90	32079
	SK 40	25	160	44	50,0	58	48	M16x1	183,90	32579
	SK 50	6	160	21	27,0	36	26	M5	221,20	30678
	SK 50	8	160	21	27,0	36	26	M6	221,20	30878
	SK 50	10	160	24	32,0	41	31	M8x1	221,20	31078
	SK 50	12	160	24	32,0	47	37	M10x1	221,20	31278
	SK 50	14	160	27	34,0	47	37	M10x1	221,20	31478
	SK 50	16	160	27	34,0	50	40	M12x1	221,20	31678
	SK 50	18	160	33	42,0	50	40	M12x1	221,20	31878
	SK 50	20	160	33	42,0	52	42	M16x1	221,20	32078
	SK 50	25	160	44	53,0	58	48	M16x1	221,20	32578
	SK 50	32	160	44	53,0	62	52	M16x1	221,20	33278

→ Min. clamping depth, Page 312

Stop screw IK

Spare parts DCONWS		82 950 ... EUR Y8/3B	
6	M5x16 - SW2,5	2,72	30000
8	M6x16 - SW3	2,91	30100
10	M8x1x16 - SW4	3,08	30200
12	M10x1x14 - SW5	3,27	30300
14	M10x1x14 - SW5	3,27	30300
16	M12x1x16 - SW6	3,44	30400
18	M12x1x16 - SW6	3,44	30400
20	M16x1x16 - SW8	3,62	30500
25	M16x1x16 - SW8	3,62	30500
32	M16x1x16 - SW8	3,62	30500

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

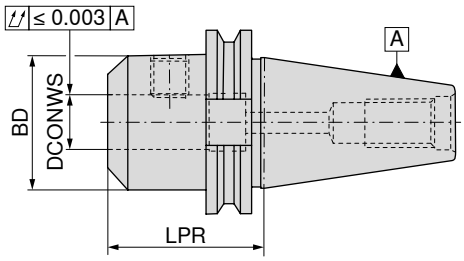

NEW

AD
G 2,5 n_{max} 25000

82 741 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	SK 30	6	50	25	106,00	**10680**
	SK 30	8	50	28	96,54	**10880**
	SK 30	10	50	35	96,54	**11080**
	SK 30	12	50	42	96,54	**11280**
	SK 30	14	63	44	96,54	**11480**
	SK 30	16	63	48	96,54	**11680**
	SK 30	18	63	50	96,54	**11880**
	SK 30	20	70	52	115,60	**12080**
extra short	SK 40	16	35	48	57,00	**01679**
	SK 40	20	35	50	57,00	**02079**
	SK 40	25	40	50	62,31	**02579**
	SK 40	32	75	72	78,74	**03279**[1)]

1) Version with two grubscrews

SK 50 adapters and other lengths can be found on the next 2 pages

Grubscrew

62 950 ...

Spare parts DCONWS		EUR W7	
6	M6x10	0,84	**006**
8	M8x10	0,99	**008**
10	M10x12	1,31	**010**
12	M12x16	1,32	**012**
14	M12x16	1,32	**012**
16	M14x16	1,66	**016**
18	M14x16	1,66	**016**
20	M16x16	2,01	**020**
25	M18x2x20	3,66	**025**
32	M20x2x20	4,04	**032**

Accessories

Coolant transfer pipe
→ 156

Others
→ 284

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

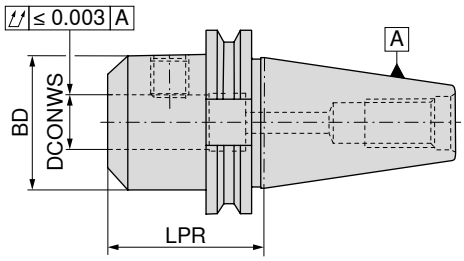

NEW

AD/B
G 2,5 n_{max} 25000

82 740 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	SK 40	6	50	25	52,74	**10679**
	SK 40	8	50	28	52,74	**10879**
	SK 40	10	50	35	49,78	**11079**
	SK 40	12	50	42	49,78	**11279**
	SK 40	14	50	44	49,78	**11479**
	SK 40	16	63	48	53,91	**11679**
	SK 40	18	63	50	53,91	**11879**
	SK 40	20	63	52	53,91	**12079**
	SK 40	25	100	65	59,14	**12579**[1)]
	SK 40	32	100	72	64,33	**13279**[1)]
	SK 40	40	120	80	70,36	**14079**[1)]
	SK 50	6	63	25	79,33	**10678**
	SK 50	8	63	28	79,33	**10878**
	SK 50	10	63	35	75,92	**11078**
	SK 50	12	63	42	75,92	**11278**
	SK 50	14	63	44	75,92	**11478**
	SK 50	16	63	48	76,15	**11678**
	SK 50	18	63	50	76,15	**11878**
	SK 50	20	63	52	76,15	**12078**
	SK 50	25	80	65	83,25	**12578**[1)]
	SK 50	32	100	72	84,42	**13278**[1)]
	SK 50	40	100	80	88,10	**14078**[1)]
medium length	SK 40	6	100	25	54,98	**20679**
	SK 40	8	100	28	54,98	**20879**
	SK 40	10	100	35	51,90	**21079**
	SK 40	12	100	42	51,90	**21279**
	SK 40	14	100	44	51,56	**21479**
	SK 40	16	100	48	57,00	**21679**
	SK 40	18	100	50	56,75	**21879**
	SK 40	20	100	52	57,00	**22079**
	SK 50	6	100	25	87,85	**20678**
	SK 50	8	100	28	87,85	**20878**
	SK 50	10	100	35	84,32	**21078**
	SK 50	12	100	42	84,32	**21278**
	SK 50	14	100	44	84,32	**21478**
	SK 50	16	100	48	84,55	**21678**
	SK 50	18	100	50	84,55	**21878**
	SK 50	20	100	52	84,55	**22078**
	SK 50	25	100	65	89,51	**22578**[1)]

1) Version with two grubscrews

16

Continued on next page

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

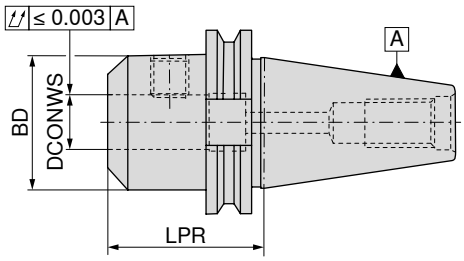

NEW

AD/B
G 2,5 n_{max} 25000

82 740 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
long	SK 40	6	130	25	60,77	**30679**
	SK 40	8	130	28	60,77	**30879**
	SK 40	10	130	35	57,23	**31079**
	SK 40	12	130	42	57,23	**31279**
	SK 40	14	130	44	57,23	**31479**
	SK 40	16	130	48	58,31	**31679**
	SK 40	18	130	50	58,31	**31879**
	SK 40	20	130	52	58,31	**32079**
	SK 50	6	130	25	94,71	**30678**
	SK 50	8	130	28	94,71	**30878**
	SK 50	10	130	35	92,94	**31078**
	SK 50	12	130	42	92,94	**31278**
	SK 50	14	130	44	92,94	**31478**
	SK 50	16	130	48	93,06	**31678**
	SK 50	18	130	50	93,06	**31878**
	SK 50	20	130	52	93,06	**32078**
	SK 50	25	130	65	95,54	**32578**[1)]
extra-long	SK 40	6	160	25	63,26	**40679**
	SK 40	8	160	28	63,26	**40879**
	SK 40	10	160	35	59,94	**41079**
	SK 40	12	160	42	59,94	**41279**
	SK 40	14	160	44	59,94	**41479**
	SK 40	16	160	48	60,19	**41679**
	SK 40	18	160	50	60,19	**41879**
	SK 40	20	160	52	60,19	**42079**
	SK 40	25	160	65	64,33	**42579**[1)]
	SK 50	6	160	25	98,48	**40678**
	SK 50	8	160	28	98,48	**40878**
	SK 50	10	160	35	98,26	**41078**
	SK 50	12	160	42	98,26	**41278**
	SK 50	14	160	44	98,26	**41478**
	SK 50	16	160	48	98,84	**41678**
	SK 50	18	160	50	98,84	**41878**
	SK 50	20	160	52	98,84	**42078**
	SK 50	25	160	65	98,60	**42578**[1)]
	SK 50	32	160	72	99,08	**43278**[1)]

1) Version with two grubscrews

The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

Spare parts and accessories on → **Page 34**.

Cylindrical Shank Adapter (Whistle Notch)

▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
▲ The groove in the flat face is a characteristic feature of the Whistle Notch version
▲ also available with Balluff chip **on request**

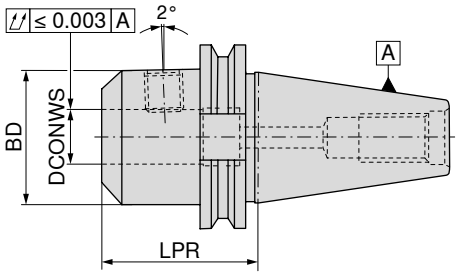

NEW

AD/B
G 2,5 n_{max} 25000

82 742 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	SK 40	6	50	25	65,05	**10679**
	SK 40	8	50	28	65,05	**10879**
	SK 40	10	50	35	60,30	**11079**
	SK 40	12	50	42	60,30	**11279**
	SK 40	14	50	44	60,30	**11479**
	SK 40	16	63	48	66,20	**11679**
	SK 40	18	63	50	66,20	**11879**
	SK 40	20	63	52	66,20	**12079**
	SK 40	25	100	65	84,19	**12579**[1)]
	SK 40	32	100	72	79,09	**13279**[1)]
	SK 50	6	63	25	111,00	**10678**
	SK 50	8	63	28	111,00	**10878**
	SK 50	10	63	35	106,10	**11078**
	SK 50	12	63	42	106,10	**11278**
	SK 50	14	63	44	106,10	**11478**
	SK 50	16	63	48	106,70	**11678**
	SK 50	18	63	50	106,70	**11878**
	SK 50	20	63	52	106,70	**12078**
	SK 50	25	80	65	116,30	**12578**[1)]
	SK 50	32	100	72	118,20	**13278**[1)]
long	SK 40	6	130	25	81,95	**30679**
	SK 40	8	130	28	81,95	**30879**
	SK 40	10	130	35	77,22	**31079**
	SK 40	12	130	42	77,22	**31279**
	SK 40	16	130	48	82,41	**31679**
	SK 40	20	130	52	82,41	**32079**
	SK 40	25	130	65	98,60	**32579**[1)]
	SK 50	6	130	25	128,90	**30678**
	SK 50	8	130	28	128,90	**30878**
	SK 50	10	130	35	124,10	**31078**
	SK 50	12	130	42	124,10	**31278**
	SK 50	16	130	48	125,30	**31678**
	SK 50	20	130	52	125,30	**32078**
	SK 50	25	130	65	131,40	**32578**[1)]
	SK 50	32	130	72	131,40	**33278**[1)]

1) Version with two grubscrews

16

Spare parts
cylindrical shank adapters (Weldon and Whistle Notch)

		Adjustment screw			Clamping screw			Grubscrew			Backstop screw		
		10 950 ...			**62 950 ...**			**62 950 ...**			**84 950 ...**		
Spare parts DCONWS $_{H4}$		**EUR** W7/6B			**EUR** W7/6B			**EUR** W7			**EUR** Y8	
6							M6x10	0,84	**006**	M5x20	9,70	**44100**
8							M8x10	0,99	**008**	M6x20	4,73	**21500**
10							M10x12	1,31	**010**	M8x16	9,70	**44200**
12 - 14	M10X20 DIN 913	3,47	**17500**				M12x16	1,32	**012**			
16 - 18							M14x16	1,66	**016**	M12x20	9,70	**44300**
20				M16x20 - SW8	1,13	**51200**	M16x16	2,01	**020**			
25							M18x2x20	3,66	**025**	M20x24	9,70	**44000**
32							M20x2x20	4,04	**032**	M20x24	9,70	**44000**

Accessories

Pull studs

→ 58, 60

Others

→ 284

Indexable insert drill adapter ISO 7388-1 SK

▲ also available with Balluff chip **on request**

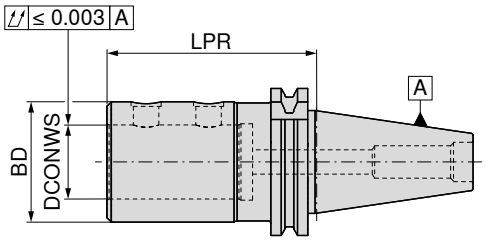

NEW

AD/B
G 6,3 n_{max} 15000

82 748 ...

Adapter	DCONWS mm	LPR mm	BD mm	EUR Y8	
SK 40	20	80	40	166,70	**12079**
SK 40	25	85	45	166,70	**12579**
SK 40	32	90	52	166,70	**13279**
SK 50	20	80	40	211,80	**12078**
SK 50	25	85	45	211,80	**12578**
SK 50	32	90	52	211,80	**13278**
SK 50	40	90	65	211,80	**14078**
SK 50	50	100	75	211,80	**15078**

Suitable eccentric sleeves can be found in → **Chapter 3, Indexable insert drilling.**

Grubscrew

10 950 ...

Spare parts DCONWS		EUR 2A/28	
20	M10x1x10	4,96	**001**
25 - 32	M12x1x10	5,04	**002**
40 - 50	M16x1x12	5,04	**003**

Accessories

Pull studs	Others
→ 58, 60	→ 284

16

ER Precision Collet chuck – PCC

- ▲ For standard or sealing disc lock nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 100 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body with lock nut and backstop screw

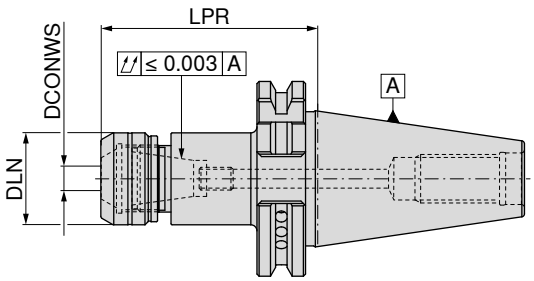

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	for collet	82 700 ... EUR Y8	
SK 40	1 - 10	70	30	426E (ER16)	115,70	**11079**
SK 40	1 - 10	100	30	426E (ER16)	166,70	**21079**
SK 40	2 - 16	70	40	430E (ER25)	115,70	**11679**
SK 40	2 - 16	100	40	430E (ER25)	166,70	**21679**
SK 40	2 - 20	70	50	470E (ER32)	115,70	**12079**
SK 40	2 - 20	100	50	470E (ER32)	166,70	**22079**
SK 50	2 - 16	70	40	430E (ER25)	218,00	**11678**
SK 50	2 - 16	100	40	430E (ER25)	270,70	**21678**
SK 50	2 - 20	70	50	470E (ER32)	218,00	**12078**
SK 50	2 - 20	100	50	470E (ER32)	270,70	**22078**

Dimension LPR is 4.5 mm longer for ER16 and ER32 and 5.0 mm longer for ER25 when using thro' coolant lock nut

Spare parts for collet	Lock nut IK 82 950 ... EUR Y8		Lock nut 82 950 ... EUR Y8		Backstop screw PCC 2 82 950 ... EUR Y8		Backstop screw PCC 1 82 950 ... EUR Y8	
426E (ER16)	43,98	**11000**	41,44	**01000**			4,15	**00100**
430E (ER25)	43,98	**11600**	41,44	**01600**	5,64	**00200**	4,15	**00300**
470E (ER32)	43,98	**12000**	41,44	**02000**	5,64	**00200**	4,15	**00300**

Accessories

ER collet	Sealing ring	Roll key
→ 268–276, 278–279	→ 281	→ 286

ER Collet chuck

▲ also available with Balluff chip **on request**

Scope of supply:
Holder with lock nut and adjustable back stop

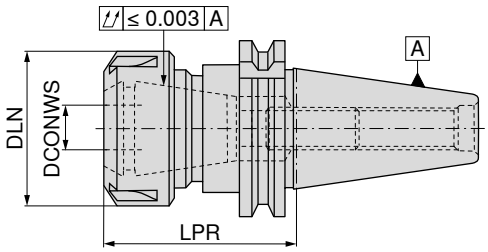



	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	NEW AD G 2,5 n_{max} 25000 82 743 ... EUR Y8		NEW AD/B G 2,5 n_{max} 25000 82 743 ... EUR Y8	
short	SK 30	1 - 10	70	28	8 - 56	426E (ER16)	109,40	11080[1)]		
	SK 30	1 - 16	70	42	24 - 104	430E (ER25)	109,40	11680		
	SK 30	2 - 20	70	50	24 - 136	470E (ER32)	109,40	12080		
	SK 40	1 - 10	60	22	8 - 56	426E (ER16 mini)			140,10	11179
	SK 40	1 - 10	60	28	8 - 56	426E (ER16)			73,65	11079[1)]
	SK 40	1 - 16	70	42	24 - 104	430E (ER25)			76,98	11679
	SK 40	2 - 20	70	50	24 - 136	470E (ER32)			77,22	12079
	SK 40	3 - 26	70	63	176	472E (ER40)			80,27	12679
	SK 50	1 - 10	60	28	8 - 56	426E (ER16)			99,44	11078[1)]
	SK 50	1 - 16	70	42	24 - 104	430E (ER25)			103,60	11678
	SK 50	2 - 20	70	50	24 - 136	470E (ER32)			105,30	12078
	SK 50	3 - 26	70	63	176	472E (ER40)			107,80	12678
medium length	SK 30	1 - 10	100	28	8 - 56	426E (ER16)	152,90	21080[1)]		
	SK 30	1 - 16	100	42	24 - 104	430E (ER25)	152,90	21680		
	SK 30	2 - 20	100	50	24 - 136	470E (ER32)	152,90	22080		
	SK 40	1 - 10	120	28	8 - 56	426E (ER16)			80,76	21079[1)]
	SK 40	1 - 10	120	22	8 - 56	426E (ER16 mini)			140,10	21179
	SK 40	1 - 16	120	42	24 - 104	430E (ER25)			84,08	21679
	SK 40	2 - 20	120	50	24 - 136	470E (ER32)			84,32	22079
	SK 40	3 - 26	100	63	176	472E (ER40)			101,30	22679
	SK 50	1 - 10	100	28	8 - 56	426E (ER16)			95,54	21078[1)]
	SK 50	1 - 16	100	42	24 - 104	430E (ER25)			99,44	21678
	SK 50	2 - 20	100	50	24 - 136	470E (ER32)			105,80	22078
	SK 50	3 - 26	100	63	176	472E (ER40)			111,00	22678
extra-long	SK 40	1 - 10	160	28	8 - 56	426E (ER16)			126,30	41079[1)]
	SK 40	2 - 16	160	42	24 - 104	430E (ER25)			126,30	41679
	SK 40	2 - 20	160	50	24 - 136	470E (ER32)			126,30	42079
	SK 40	3 - 26	160	63	176	472E (ER40)			146,10	42679
	SK 50	1 - 16	160	42	24 - 104	430E (ER25)			108,40	41678
	SK 50	2 - 20	160	50	24 - 136	470E (ER32)			119,40	42078

1) with 6 position lock nut

Spare parts ER collet chucks

	Lock nut		Lock nut IK		Lock nut		Y clamping key		ER Mini clamping key		Mini lock nut		Mini IK		Stop screw IK	
	62 950 ...		**83 950 ...**		**62 950 ...**		**83 357 ...**		**83 950 ...**		**62 950 ...**		**83 950 ...**		**84 950 ...**	
Spare parts for collet	**EUR** W7		**EUR** Y8		**EUR** W7		**EUR** Y8		**EUR** Y8		**EUR** W7		**EUR** Y8		**EUR** Y8	
426E (ER16 mini)									20,81	**101**	30,82	**066**	46,98	**058**	28,31	**44600**
426E (ER16)	22,96	**044**													28,31	**44600**
430E (ER25)			51,29	**055**	25,68	**055**	22,85	**125**							28,31	**44400**
470E (ER32)			54,43	**056**	23,93	**65600**	31,09	**132**							28,31	**44400**
472E (ER40)			64,23	**057**	23,26	**65700**	34,22	**140**							28,31	**44500**

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

Accessories

			
ER collet	Sealing ring	Pull studs	Others
→ 271–276, 279	→ 280	→ 58, 60	→ 284

Short drill chuck – NC 2010

▲ Independent of direction of rotation
▲ Torque Moment = 12 Nm
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder including clamping key SW4

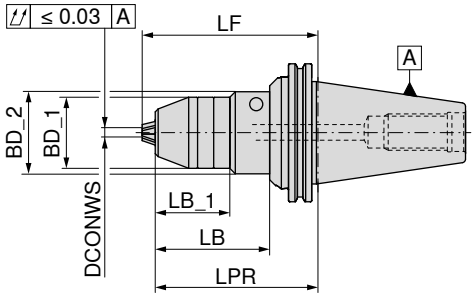

A
G 6,3 n_{max} 10000

AD
G 6,3 n_{max} 10000

Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LF mm	84 418 ... EUR Y8		84 419 ... EUR Y8	
SK 30	0,5 - 10	80	43,0			59,9	89,0	348,70	**313**		
SK 40	0,5 - 13	80	48,5			60,8	89,0	267,80	**413**	285,10	**413**
SK 40	2,5 - 16	80	51,0			60,0	90,5			310,90	**416**
SK 40	2,5 - 16	80	51,0			60,8	90,5	285,10	**416**		
SK 50	0,5 - 13	110	48,5	56	50,9	78,0	119,0			361,00	**513**
SK 50	0,5 - 13	110	48,5	56	50,9	78,1	119,0	348,70	**513**		
SK 50	2,5 - 16	110	51,0	56	50,9	78,0	120,5			361,00	**516**
SK 50	2,5 - 16	110	56,0		50,9	78,0	120,5	354,10	**516**		

Can be used at G 2.5 to 30,000 1/min after additional balancing !

Accessories

Others

→ 284

16

Synchro tapping chuck with minimum length compensation

- For collet
- With length compensation under tension and compression (LZD)
- for synchro use
- $p_{max.}$ = 50 bar
- also available with Balluff chip **on request**

Scope of supply:
Without insert

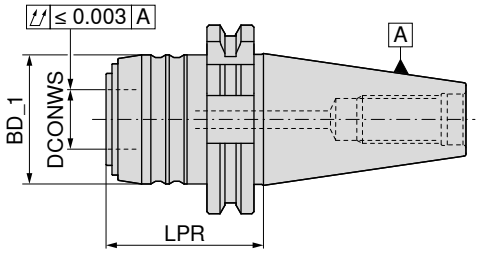



AD

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	83 416 ... EUR Y8	
SK 40	M3 - M12	1	53	43	20	1,0 / 0,2	208,30	**012**
SK 40	M6 - M20	2	90	60	32	1,0 / 0,2	270,40	**020**
SK 50	M3 - M12	1	53	43	20	1,0 / 0,2	225,80	**112**
SK 50	M6 - M20	2	74	60	32	1,0 / 0,2	347,50	**120**

Accessories

Pull studs
→ 58, 60

Others
→ 284

Insert for synchro quick change tapping chuck with minimum length compensation

▲ SZID = for insert size

Scope of supply:
Includes lock nut

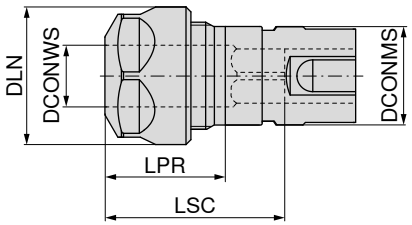

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	83 608 ... EUR Y8	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	142,00	012 [1]
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	164,90	020

1) with 6 position lock nut

Lock nut

Lock nut IK

Lock nut

Y clamping key

Spare parts for Article no.		62 950 ... EUR W7			83 950 ... EUR Y8			62 950 ... EUR W7		83 357 ... EUR Y8	
83 608 012	M22x1,5 - SW25	22,96	044	M22x1,5	39,48	054	M22x1,5	22,96	054	20,69	116
83 608 020				M32x1,5	51,29	055	M32x1,5	25,68	055	22,85	125

16

Quick change tap chuck with length compensation

▲ With length compensation under tension and compression (LZD)
▲ also available with Balluff chip **on request**

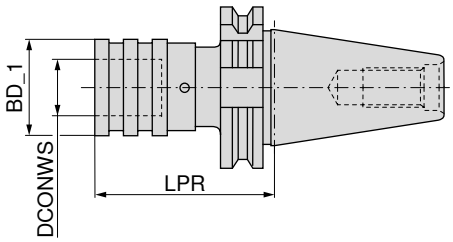

A

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	83 428 ... EUR Y8	
SK 30	M3 - M12	01	60	38	19	9	340,70	**312**
SK 30	M6 - M20	02	101	55	31	15	388,00	**320**
SK 40	M3 - M12	01	60	38	19	9	265,00	**412**
SK 40	M6 - M20	02	100	55	31	15	285,10	**420**
SK 50	M3 - M12	01	62	38	19	9	393,40	**512**
SK 50	M6 - M20	02	83	55	31	15	428,60	**520**

Accessories

Collet
→ 288, 290–292

Pull studs
→ 58, 60

Others
→ 284

Adapter with ABS Connection

▲ also available with Balluff chip **on request**

Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

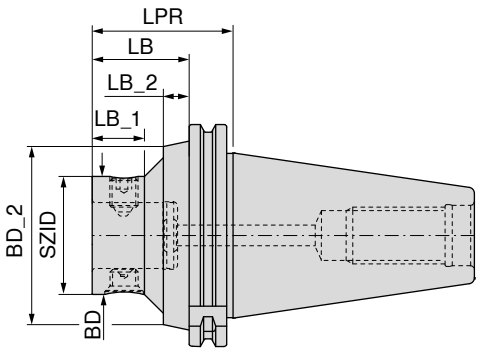

AD/B

G 6,3 n_{max} 8000

Adapter	KOMET no.	SZID	BD	LPR	LB	LB_1	LB_2	BD_2	84 201 ... EUR 3E	
			mm	mm	mm	mm	mm	mm		
SK 40	A50 55120	ABS 25	25	50	30,9	20,0	7,9	50	257,90	**04090**
SK 40	A50 55130	ABS 32	32	50	30,9	20,0	7,9	50	257,90	**04089**
SK 40	A50 55140	ABS 40	40	50	30,9	20,0		50	257,90	**04088**
SK 40	A50 55150	ABS 50	50	50	30,9				257,90	**04097**
SK 40	A50 55160	ABS 63	63	90	70,9		15,9	50	257,90	**04096**
SK 50	A50 55320	ABS 25	25	60	40,9	20,0	12,9	80	290,80	**05090**
SK 50	A50 55330	ABS 32	32	60	40,9	20,0	12,9	80	290,80	**05089**
SK 50	A50 55340	ABS 40	40	60	40,9	20,0	12,9	80	290,80	**05088**
SK 50	A50 55350	ABS 50	50	60	40,9	22,0	10,9	80	290,80	**05097**
SK 50	A50 55360	ABS 63	63	60	40,9	30,4	7,3	80	290,80	**05096**
SK 50	A50 55370	ABS 80	80	70	50,9				290,80	**05092**
SK 50	A50 55380	ABS 100	100	115	95,9		15,9	80	290,80	**05091**

Conversion kit – SK

for	Adapter	84 950 ... EUR W7/6B	
4 mm	SK 40	6,43	**23200**
6 mm	SK 50	6,43	**23400**

Eccentric adjuster with ABS Connection

▲ Adjustment ± 0.25 mm on diameter
▲ also available with Balluff chip **on request**

Scope of supply:
Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

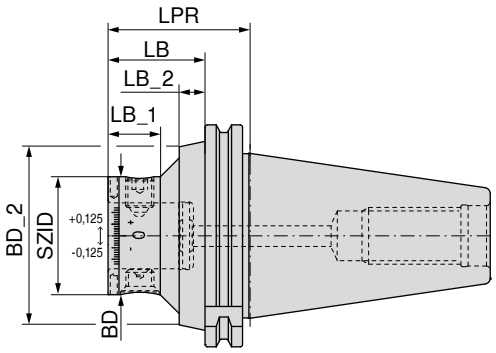

AD/B

84 204 ...

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	LB_1 mm	LB_2 mm	BD_2 mm	EUR W4/6A	
SK 40	A50 56150	ABS 50	50	50	30,9				518,80	**04097**
SK 40	A50 56160	ABS 63	63	90	70,9		15,9	50	518,80	**04096**
SK 50	A50 56350	ABS 50	50	60	40,9	22,0	10,9	80	552,70	**05097**
SK 50	A50 56360	ABS 63	63	60	40,9	30,4	7,3	80	552,70	**05096**

Torsional vibration dampers with ABS Connection

▲ also available with Balluff chip **on request**

Scope of supply:
Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

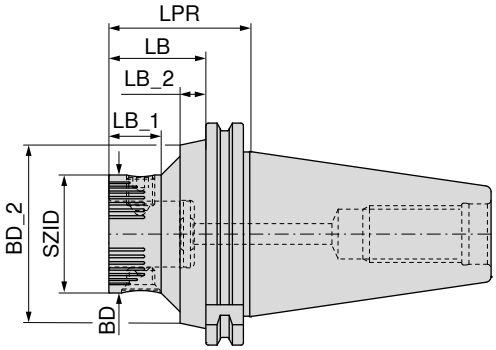

AD/B

84 207 ...

Adapter	KOMET no.	SZID	BD mm	LPR mm	BD_2 mm	LB mm	LB_1 mm	LB_2 mm	EUR 3E	
SK 40	A50 01351	ABS 50	50	50		30,9			707,50	**04097**
SK 40	A50 01361	ABS 63	63	90	50	70,9		15,9	842,50	**04096**
SK 50	A50 01451	ABS 50	50	60	80	40,9	22,0	10,9	845,40	**05097**
SK 50	A50 01461	ABS 63	63	60	80	40,9	30,4	7,3	878,40	**05096**
SK 50	A50 01470	ABS 80	80	70		50,9			977,40	**05092**

Adapter with ABS Connection – SK-FC

▲ with face contact
▲ also available with Balluff chip **on request**

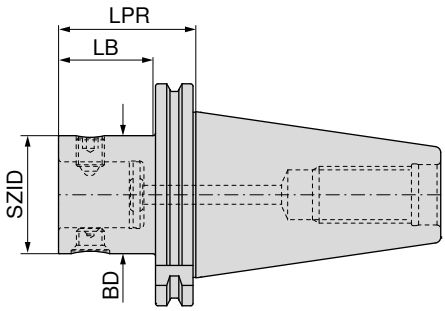

AD
G 6,3 n_{max} 8000

Adapter	SZID	BD mm	LPR mm	LB mm	84 264 ... EUR Y8	
SK-FC 50	ABS 50	50	60	40,9	851,80	**05073**
SK-FC 50	ABS 63	63	60	40,9	874,70	**06373**
SK-FC 50	ABS 80	80	70	50,9	888,00	**08073**
SK-FC 50	ABS 100	100	115	95,9	897,60	**10073**

Clamping screw

Taper screw

Spare parts SZID	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**
ABS 100	23,21	**25700**	25,41	**25200**

Accessories

Pull studs
→ 58, 60

Extension
→ 187

Others
→ 284

Adapter for milling cutters with threaded end

▲ also available with Balluff chip **on request**

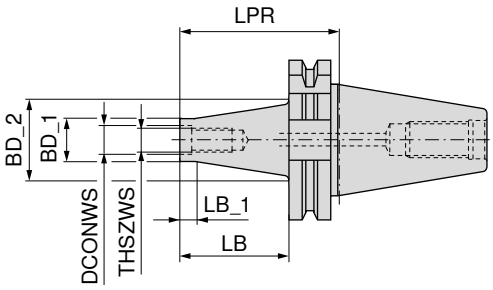

Adapter	THSZWS	DCONWS	LB	BD_1	BD_2	LB_1	LPR	AD G 6,3 n_{max} 18000 56 705 ... EUR WA		AD G 16 n_{max} 8000 56 707 ... EUR WA	
		mm	mm	mm	mm	mm	mm				
SK 40	M8	8,5	25	13,8	15	12	44	122,90	**081**		
SK 40	M8	8,5	50	13,8	23	12	69	131,70	**082**		
SK 40	M8	8,5	75	13,8	25	12	94	142,00	**083**		
SK 40	M10	10,5	25	18,0	23	12	44	122,90	**101**		
SK 40	M10	10,5	50	18,0	25	12	69	131,70	**102**		
SK 40	M10	10,5	75	18,0	30	12	94	142,00	**103**		
SK 40	M10	10,5	100	18,0	35	12	119	152,80	**104**		
SK 40	M12	12,5	25	21,0	24	12	44	122,90	**121**		
SK 40	M12	12,5	50	21,0	30	12	69	131,70	**122**		
SK 40	M12	12,5	75	21,0	35	12	94	142,00	**123**		
SK 40	M12	12,5	100	21,0	38	12	119	152,80	**124**		
SK 40	M16	17,0	25	29,0	29	12	44	122,90	**161**		
SK 40	M16	17,0	50	29,0	34	12	69	131,70	**162**		
SK 40	M16	17,0	75	29,0	35	12	94	142,00	**163**		
SK 40	M16	17,0	100	29,0	40	12	119	152,80	**164**		
SK 40	M16	17,0	125	29,0	44	12	144	162,40	**165**		
SK 40	M16	17,0	150	29,0	48	12	169	173,00	**166**		
SK 40	M16	17,0	200	29,0	50	12	219	200,20	**167**		
SK 50	M12	12,5	50	21,0	30	12	69			183,90	**122**
SK 50	M12	12,5	100	21,0	38	12	119			209,70	**124**
SK 50	M12	12,5	150	21,0	52	12	169			240,70	**126**
SK 50	M16	17,0	50	29,0	34	12	69			183,90	**162**
SK 50	M16	17,0	100	29,0	40	12	119			209,70	**164**
SK 50	M16	17,0	150	29,0	48	12	169			240,70	**166**
SK 50	M16	17,0	200	29,0	58	12	219			277,30	**167**
SK 50	M16	17,0	250	29,0	62	12	269			319,10	**168**

Accessories

Extension-Reduction set
→ 257

Pull studs
→ 58, 60

Others
→ 284

Adapter for milling cutters with threaded end

▲ also available with Balluff chip **on request**

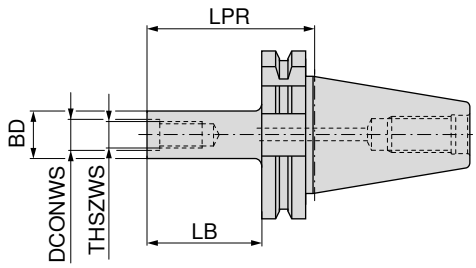



AD
G 6,3 n_{max} 18000

56 709 ...

Adapter	THSZWS	DCONWS mm	LB mm	BD mm	LPR mm	EUR WA	
SK 40	M8	8,5	50	13,8	69	140,70	**082**
SK 40	M10	10,5	50	18,0	69	140,70	**102**
SK 40	M10	10,5	75	18,0	94	151,30	**103**
SK 40	M10	10,5	100	18,0	119	160,90	**104**
SK 40	M12	12,5	50	21,0	69	140,70	**122**
SK 40	M12	12,5	75	21,0	94	151,30	**123**
SK 40	M12	12,5	100	21,0	119	160,90	**124**
SK 40	M16	17,0	50	29,0	69	140,70	**162**
SK 40	M16	17,0	75	29,0	94	151,30	**163**
SK 40	M16	17,0	100	29,0	119	160,90	**164**

Accessories

Extension-Reduction set
→ 257

Pull studs
→ 58, 60

Others
→ 284

Combination shell mill adapter

▲ For milling cutters with transverse or longitudinal groove according to DIN 6358
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder with clamping screw, driving ring and dowel spring

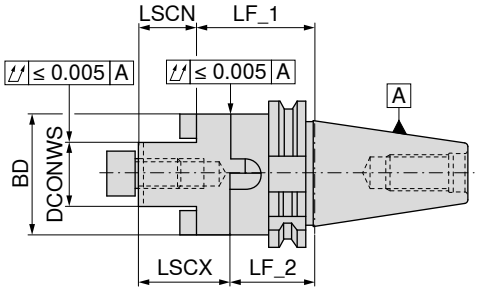

NEW

A
G 2,5 n_{max} 25000

82 744 ...

	Adapter	DCONWS mm	LF_1 mm	BD mm	LSCX mm	LSCN mm	LF_2 mm	EUR Y8	
short	SK 30	16	50	32	27	17	40	106,00	**11680**
	SK 30	22	50	40	31	19	38	106,00	**12280**
	SK 30	27	55	48	33	21	43	112,60	**12780**
	SK 30	32	60	58	38	24	46	119,10	**13280**
	SK 40	16	55	32	27	17	45	72,83	**11679**
	SK 40	22	55	40	31	19	43	75,68	**12279**
	SK 40	27	55	48	33	21	43	77,22	**12779**
	SK 40	32	60	58	38	24	46	81,60	**13279**
	SK 40	40	60	70	41	27	46	85,85	**14079**[1)]
	SK 50	16	55	32	27	17	45	109,30	**11678**
	SK 50	22	55	40	31	19	43	113,10	**12278**
	SK 50	27	55	48	33	21	43	121,90	**12778**
	SK 50	32	55	58	38	24	41	125,30	**13278**
	SK 50	40	55	70	41	27	41	128,90	**14078**[1)]
	SK 50	50	70	90	46	30	54	140,80	**15078**[1)]
medium length	SK 40	16	100	32	27	17	90	97,05	**21679**
	SK 40	22	100	40	31	19	88	101,10	**22279**
	SK 40	27	100	48	33	21	88	103,00	**22779**
	SK 40	32	100	58	38	24	86	108,60	**23279**
	SK 40	40	100	70	41	27	86	114,50	**24079**

1) With cross screw

Parallel key

Drive ring

Cross nut key

Cross screw

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B		83 370 ... EUR Y8		83 368 ... EUR Y8			83 367 ... EUR Y8			83 950 ... EUR Y8/3B	
16	4 x 4 x 20	2,11	**284**	12,79	**116**	13,79	**116**	M8	4,17	**016**	M8x25	3,72	**113**
22	6 x 6 x 25	2,11	**285**	14,21	**122**	17,18	**122**	M10	4,58	**022**	M10x25	4,28	**124**
27	7 x 7 x 25	4,04	**286**	15,28	**127**	22,03	**127**	M12	5,85	**027**	M12x30	4,73	**125**
32	8 x 7 x 28	2,43	**287**	18,25	**132**	28,38	**132**	M16	9,39	**032**	M16x35	5,88	**126**
40	10 x 8 x 32	2,57	**288**	27,16	**140**	39,63	**140**	M20	14,89	**040**	M20x40 - SW17	8,35	**112**
50	12 x 8 x 36	2,91	**289**	47,86	**150**	53,96	**150**	M24	32,98	**050**			

Accessories

Pull studs	Milling Adapter Rings	Others
58, 60	263	284

Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

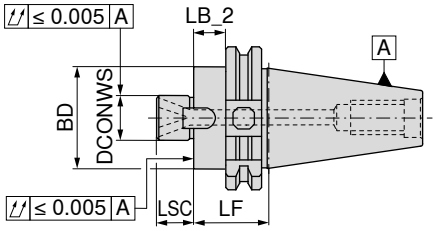

NEW

AD
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm		82 315 ... EUR Y8/3B	
short	SK 40	22	41	60	38	19		116,10	**12279**
	SK 40	27	25	44	48	21		113,20	**12779**
	SK 50	22	41	60	38	19		159,70	**12278**
	SK 50	27	25	44	48	21		162,50	**12778**

These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters.
Now they can be clamped perfectly, thanks to the adapted flange diameters.

		Screw for drivers			Driver			clamping screw	
		83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B	
Spare parts DCONWS									
22	M4x8	0,75	**51700**	10x7x20,5	10,58	**51500**	M10x25	4,28	**124**
27	M5x8	0,92	**51800**	12x9x24,3	12,06	**51600**	M12x30	4,73	**125**

16

Shell mill adapter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder with clamping screw

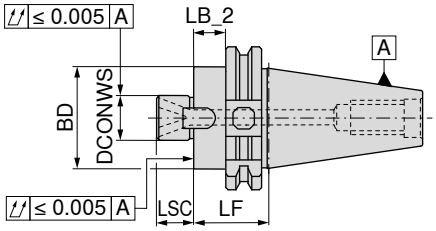



AD
G 2,5 n_{max} 25000

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	82 745 ... EUR Y8		82 745 ... EUR Y8	
short	SK 30	16	20,9	40	38	17	99,65	**11680**		
	SK 30	22	30,9	50	48	19	99,65	**12280**		
	SK 30	27	35,9	55	58	21	106,00	**12780**		
	SK 30	32	30,9	50	78	24	113,00	**13280**		
	SK 40	16	25,0	44	38	17			72,83	**11679**
	SK 40	22	25,0	44	48	19			77,22	**12279**
	SK 40	27	36,0	55	58	21			78,62	**12779**
	SK 40	32	31,0	50	78	24			82,77	**13279**
	SK 40	40	31,0	50	88	27			90,00	**14079**[1)]
	SK 50	16	25,0	44	38	17			112,50	**11678**
	SK 50	22	25,0	44	48	19			115,40	**12278**
	SK 50	27	25,0	44	58	21			118,20	**12778**
	SK 50	32	21,0	40	78	24			127,80	**13278**
	SK 50	40	31,0	50	88	27			130,10	**14078**[1)]
medium length	SK 40	16	81,0	100	38	17			75,32	**21679**
	SK 40	22	81,0	100	48	19			77,81	**22279**
	SK 40	27	81,0	100	58	21			79,09	**22779**
	SK 40	32	81,0	100	78	24			83,25	**23279**
	SK 40	40	81,0	100	88	27			86,91	**24079**[1)]
	SK 50	16	81,0	100	38	17			119,40	**21678**
	SK 50	22	81,0	100	48	19			121,90	**22278**
	SK 50	27	81,0	100	58	21			125,30	**22778**
	SK 50	32	81,0	100	78	24			128,90	**23278**
	SK 50	40	81,0	100	88	27			131,40	**24078**[1)]
long	SK 40	16	111,0	130	38	17			80,04	**31679**
	SK 40	22	111,0	130	48	19			82,77	**32279**
	SK 40	27	111,0	130	58	21			84,08	**32779**
	SK 40	32	111,0	130	78	24			88,10	**33279**
	SK 40	40	111,0	130	88	27			91,99	**34079**[1)]
	SK 50	16	111,0	130	38	17			126,40	**31678**
	SK 50	22	111,0	130	48	19			128,90	**32278**
	SK 50	27	111,0	130	58	21			132,40	**32778**
	SK 50	32	111,0	130	78	24			136,10	**33278**
	SK 50	40	111,0	130	88	27			138,30	**34078**[1)]
extra-long	SK 40	16	141,0	160	38	17			82,77	**41679**
	SK 40	22	141,0	160	48	19			85,48	**42279**
	SK 40	27	141,0	160	58	21			86,67	**42779**
	SK 40	32	141,0	160	78	24			90,69	**43279**
	SK 40	40	141,0	160	88	27			94,48	**44079**[1)]
	SK 50	16	141,0	160	38	17			130,10	**41678**
	SK 50	22	141,0	160	48	19			133,70	**42278**
	SK 50	27	141,0	160	58	21			136,10	**42778**
	SK 50	32	141,0	160	78	24			139,60	**43278**
	SK 50	40	141,0	160	88	27			143,10	**44078**[1)]

1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!

Spare parts facemill adapters

Cross nut key

83 368 ...

Spare parts DCONWS	EUR Y8	
16	13,79	**116**
22	17,18	**122**
27	22,03	**127**
32	28,38	**132**
40	39,63	**140**

Cross screw

83 367 ...

	EUR Y8	
M8	4,17	**016**
M10	4,58	**022**
M12	5,85	**027**
M16	9,39	**032**
M20	14,89	**040**

clamping screw

83 950 ...

	EUR Y8/3B	
M8x25	3,72	**113**
M10x25	4,28	**124**
M12x30	4,73	**125**
M16x35	5,88	**126**
M20x40 - SW17	8,35	**112**

Screw for drivers

84 950 ...

	EUR Y8	
M3x12	4,89	**162**
M4x10	4,89	**163**
M4x16	4,89	**164**
M5x16	4,89	**166**
M5x16	4,89	**166**

Driver

84 950 ...

	EUR Y8	
8x9,8x10	28,76	**43400**
10x11,2x12	28,76	**43200**
12x12,6x14	28,76	**43300**
14x14x22,5	17,98	**160**
16x16x23	20,01	**161**

Accessories

Pull studs
→ 58, 60

Extensions
→ 262

Others
→ 284

Large diameter facemill adapter

▲ For milling cutters with keyway or drive slot DIN 6357
▲ also available with Balluff chip **on request**

Scope of supply:
Holder with integrated drive dogs according to DIN 2079 and 4 fixation screws

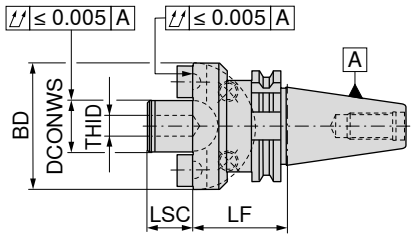



NEW

A
G 6,3 n_{max} 8000

Adapter	DCONWS mm	LF mm	BD mm	LSC mm	THID	82 432 ... EUR Y8	
SK 40	40	60	89	30	M20	149,10	**14079**
SK 50	40	70	89	30	M20	172,60	**14078**
SK 50	60	70	129	40	M30	209,40	**16078**

Screw for drivers

Driver

clamping screw

Spare parts DCONWS	84 950 ... EUR Y8			84 950 ... EUR Y8			83 950 ... EUR Y8/3B		
40	M5x16	4,89	**166**	16x16x23	20,01	**161**	M12x50	4,70	**140**
60	M12x25	4,67	**43500**	25,4x25x26,5	28,76	**43100**	M16x45	12,00	**160**

Accessories

Pull studs
→ 58, 60

Others
→ 284

Taper sleeve DIN6383 for DIN 228-2D Morse taper shanks

▲ also available with Balluff chip **on request**

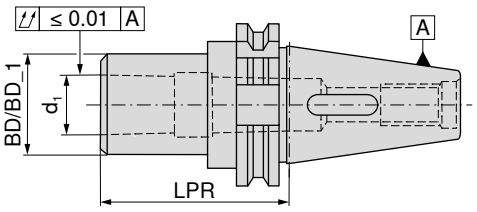

NEW

AD

G 6,3 n_{max} 15000

82 746 ...

	Adapter	d_1	LPR mm	BD mm	EUR Y8	
short	SK 30	MK1	50	25	94,63	**11080**
	SK 30	MK2	63	32	94,63	**12080**
	SK 30	MK3	80	40	102,90	**13080**
	SK 40	MK2	50	32	64,09	**12079**
	SK 40	MK1	50	25	64,09	**11079**
	SK 40	MK3	70	40	68,45	**13079**
	SK 40	MK4	95	48	71,42	**14079**
	SK 50	MK1	50	25	87,62	**11078**
	SK 50	MK2	60	32	90,69	**12078**
	SK 50	MK3	65	40	90,69	**13078**
	SK 50	MK4	95	48	93,64	**14078**
	SK 50	MK5	105	63	101,80	**15078**
medium length	SK 40	MK2	117	32	91,25	**22079**
	SK 40	MK3	133	40	101,40	**23079**
	SK 40	MK4	156	48	110,60	**24079**

Accessories

Morse taper adapter sleeve
→ 242

Pull studs
→ 58, 60

Others
→ 284

16

Milling adapter sleeve

▲ For mounting steep taper adapters according to DIN 2080
▲ With an extended retaining screw, adapters compliant with ISO 7388-1 – SK, ISO 7388-2 – MAS-BT and ANSI-CAT can also be clamped
▲ also available with Balluff chip **on request**

Scope of supply:
Holder with clamping screw for DIN 2080 adapters

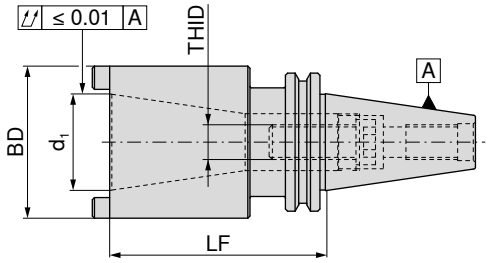

NEW

A
G 6,3 n_{max} 8000

Adapter	d_1	LF mm	BD mm	THID	84 040 ... EUR Y8	
SK 40	SK 30	50	50	M12	154,30	**13079**
SK 40	SK 40	100	70	M16	120,50	**14079**
SK 50	SK 40	80	70	M16	164,20	**14078**
SK 50	SK 50	120	100	M24	172,60	**15078**

Clamping screw SK
83 950 ...

Clamping Screw
84 950 ...

Counterscrew
83 950 ...

Hollow key with nose
83 359 ...

Threaded ring
84 950 ...

clamping screw
83 950 ...

Spare parts for Article no.	EUR Y8/3B		EUR Y8		EUR Y8/3B		EUR Y8/3B		EUR Y8		EUR Y8/3B	
84 040 13079					0,61	**030**	26,91	**017**	33,13	**127**	4,73	**125**
84 040 14079	8,35	**264**	4,67	**43700**	0,61	**030**	32,58	**023**	30,91	**43800**		
84 040 14078	7,54	**009**	4,67	**43600**								
84 040 15078	26,22	**256**			0,61	**030**	40,55	**133**	30,91	**43900**		

Auxiliary table for finding the required spare parts and accessories for intermediate sleeves for SK-adapters

ISO 7388-1 Suitable for article no.	Norm of the SK-shank Ø d_1 ISO 7388-1	Ø d_1 DIN 2080	Clamping screw length THID	Clamping screw SK Article no.	Threaded ring Article no.	lock screw Article no.	hollow key Article no.
84 040 13079		SK 30	M12 x 30	**83 950 125**	**84 950 127**	**83 950 030**	**83 359 017**
84 040 14079	SK40		M16 x 70	**83 950 264**	**84 950 43800**	**83 950 030**	**83 359 023**
84 040 14079		SK40	M16 x 45	**84 950 43700**	**84 950 43800**	**83 950 030**	**83 359 023**
84 040 14078	SK40		M16 x 65	**84 950 43600**			
84 040 14078		SK40	M16 x 40	**83 950 009**			
84 040 15078	SK50		M24 x 80	**83 950 256**	**84 950 43900**	**83 950 030**	**83 359 133**
84 040 15078		SK50	M24 x 50	**83 950 263**	**84 950 43900**	**83 950 030**	**83 359 133**

SK/HSK-A adapter

▲ for mounting HSK-A adapters according to ISO 12164
▲ also available with Balluff chip **on request**

Scope of supply:
with clamping cartridge and cover ring

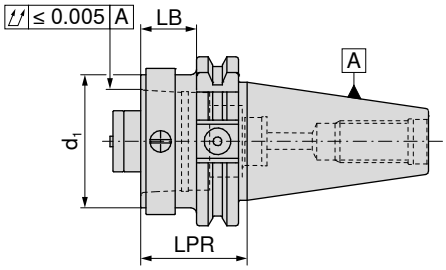



AD

Adapter	d_1	LB mm	LPR mm	84 014 ... EUR Y8	
SK 40	HSK-A 32	20,9	40	591,80	**04060**
SK 40	HSK-A 40	20,9	40	603,70	**04059**
SK 40	HSK-A 50	20,9	40	615,60	**04058**
SK 40	HSK-A 63	60,9	80	603,70	**04057**
SK 50	HSK-A 32	20,9	40	746,30	**05060**
SK 50	HSK-A 40	20,9	40	746,30	**05059**
SK 50	HSK-A 50	20,9	40	758,20	**05058**
SK 50	HSK-A 63	20,9	40	805,90	**05057**
SK 50	HSK-A 100	80,9	100	948,40	**05055**

SK/PSC adapter

▲ for mounting PSC adapters according to ISO 26623-1
▲ also available with Balluff chip **on request**

Scope of supply:
with tightening screw

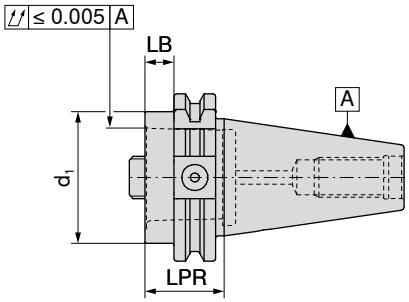

AD

Adapter	d_1	LB mm	LPR mm	84 015 ... EUR Y8	
SK 40	PSC 32	10,9	30	377,80	**04087**
SK 40	PSC 40	10,9	30	389,80	**04095**
SK 40	PSC 50	10,9	30	389,80	**04094**
SK 40	PSC 63	65,9	85	377,80	**04093**
SK 50	PSC 32	10,9	30	520,60	**05087**
SK 50	PSC 40	10,9	30	615,60	**05095**
SK 50	PSC 50	10,9	30	532,40	**05094**
SK 50	PSC 63	10,9	30	544,30	**05093**
SK 50	PSC 80	50,9	70	579,90	**05086**

Threaded ring

tightening screw

Spare parts d_1	84 950 ... EUR Y8			84 950 ... EUR Y8	
PSC 32	33,13	**127**	SW8	23,93	**122**
PSC 40	33,13	**128**	SW8	27,05	**123**
PSC 50	33,13	**129**	SW10	27,05	**124**
PSC 63	66,12	**130**	SW14	30,28	**126**
PSC 80	66,12	**130**	SW14	30,28	**126**

Blank

- ▲ Material: Steel 16MnCr5
- ▲ for production of special tools
- ▲ Diameter BD turned with 0.5 mm oversize
- ▲ Taper hardened and ground
- ▲ Special tool area in soft state
- ▲ also available with Balluff chip **on request**

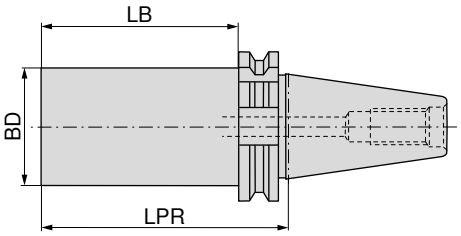

NEW

AD/B

Adapter	BD mm	LPR mm	LB mm	82 747 ... EUR Y8	
SK 40	63,0	250	231	84,89	**16379**
SK 50	63,5	300	281	156,10	**16378**

Test bar

- ▲ Without tool change groove
- ▲ Use for MAS BT 40 special pull studs with 3 mm shorter LF dimension, as standard

Scope of supply:
in wooden box

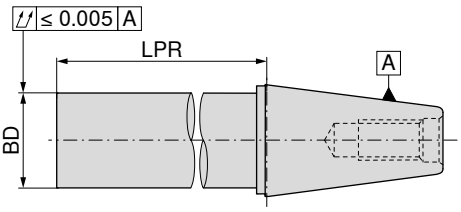

NEW



A

Adapter	BD mm	LPR mm	81 746 ... EUR Y8	
SK / BT 40	40	320	370,10	**14079**
SK / BT 50	50	320	456,30	**15078**

Accessories

Pull studs
→ 58, 60

Others
→ 284

16

Pull studs for tool holders according to ISO 7388-1

▲ ISO 7388-3 AD
▲ For tools with or without axial coolant supply

Scope of supply:
including O-Ring







Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	82 475 ... EUR Y8		82 468 ... EUR Y8	
SK 30	13	9	17	13	M12	44	24	19	5	3,5	14	20	A			12,16	**030**
SK 40	19	14	23	17	M16	54	26	20	7	7,0	19	50	A			6,66	**040**
SK 50	28	21	36	25	M24	74	34	25	10	11,5	30	150	A			10,11	**050**
SK 30	13	9	17	13	M12	44	24	19	5		14	20	B	12,16	**030**		
SK 40	19	14	23	17	M16	54	26	20	7		19	50	B	6,66	**040**		
SK 50	28	21	36	25	M24	74	34	25	10		30	150	B	10,11	**050**		

Pull studs for tool holders according to ISO 7388-1

▲ Similar to BT 45°, but 3 mm shorter
▲ for Haas, Micron and Hurco machines

Scope of supply:
including O-Ring







Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	83 538 ... EUR Y8		83 535 ... EUR Y8	
SK 40	15	10	23	17	M16	57	32	25	5	4	19	50	A			11,98	**040**
SK 40	15	10	23	17	M16	57	32	25	5		19	50	B	12,35	**040**		

Spare parts BD_4		83 476 ... EUR Y8	
17	BT / SK 40	0,59	**040**
25	BT / SK 50	0,59	**050**

Pull studs for tool holders according to ISO 7388-1

▲ ISO 7388-3 Form UD
▲ For tools with axial coolant supply





NEW

Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	CND mm	DRVS mm	TQX Nm	82 469 ... EUR Y8	
SK 40	18,95	12,95	22,5	17	M16	44,5	16,4	11,15	7,35	19	50	7,61	**04000**

Pull studs for adapters according to ANSI-CAT (MAZAK)

▲ ANSI – CAT 40
▲ Similar to BT 45°, but 3 mm shorter
▲ For Mazak machines





NEW

Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	CND mm	DRVS mm	TQX Nm	82 469 ... EUR Y8	
SK 40	18,796	12,449	22	17	M16	44,106	19,106	14,026	7	19	50	7,61	**14000**

Pull studs for tool holders according to ISO 7388-1

▲ CAT Mazak
▲ Face ground flat

Scope of supply:
SK 50 including O-ring
SK 40 without O-ring groove





Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	82 487 ... EUR Y8	
SK 40	18,79	12,44	21,8	17	M16	41,26	16,25	11,17	4,0	7,0	19	50	7,05	**040**
SK 50	29,10	19,60	37,0	25	M24	65,50	25,55	17,95	5,5	11,5	30	150	10,11	**050**

Pull studs for tool holders according to ISO 7388-1

▲ SK 40 with circlip groove and edge protection, with and without internal thread
▲ SK 50 with circlip groove, with and without internal thread
▲ For tools according to ISO 7388-1 for conversion to DIN 2080





Adapter	BD_1 mm	BD_2 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	without internal thread 82 493 ... EUR Y8		with internal thread 82 494 ... EUR Y8	
SK 40	25,0	21,1	17	M16	53	25	13,6	8	7	19	50	7,93	**040**	8,31	**040**
SK 50	39,3	32,0	25	M24	65	25	13,3	10		30	150	11,11	**050** [1]	12,37	**050**

1) with O ring

Pull studs for tool holders according to ISO 7388-1

▲ DECKEL thread S 20 x 2





Adapter	THSZMS	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	BD_2 mm	BD_4 mm	DRVS mm	83 471 ... EUR Y8	
SK 40	S 20 x 2	M16	55	33	4	17	16,7	17	22	26,22	**040**

ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

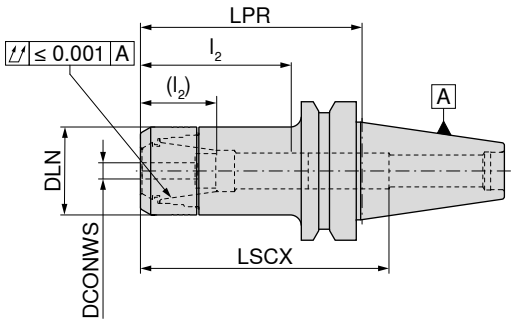

AD

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	84 524 ... EUR Y8	
BT 30	1 - 10	50	30	73	28 - 44 (16 - 31)	426E (ER16)	116,70	**001**
BT 30	1 - 10	75	30	97	28 - 45 (14 - 31)	426E (ER16)	130,90	**002**
BT 30	1 - 10	100	30	123	28 - 44 (16 - 31)	426E (ER16)	151,70	**003**
BT 30	1 - 10	120	30	112	28 - 45 (14 - 31)	426E (ER16)	164,50	**004**
BT 30	2 - 16	60	40	77	35 - 59 (30 - 42)	430E (ER25)	128,30	**160**
BT 30	2 - 16	75	40	72	38 - 56 (23 - 39)	430E (ER25)	131,10	**161**
BT 30	2 - 16	90	40	87	38 - 56 (23 - 39)	430E (ER25)	144,00	**162**
BT 30	2 - 16	120	40	115	38 - 56 (23 - 39)	430E (ER25)	164,60	**164**
BT 30	2 - 20	60	50	69	42 - 52	470E (ER32)	128,30	**207**
BT 30	2 - 20	75	50	84	42 - 62 (24 - 45)	470E (ER32)	131,10	**208**
BT 30	2 - 20	90	50	94	42 - 62 (24 - 45)	470E (ER32)	144,00	**209**
BT 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	116,70	**210**
BT 40	1 - 10	90	30	120	30 - 50 (29 - 36)	426E (ER16)	129,70	**310**
BT 40	1 - 10	120	30	140	29 - 45 (29 - 35)	426E (ER16)	175,00	**410**
BT 40	1 - 10	150	30	180	29 - 45 (29 - 32)	426E (ER16)	193,20	**510**
BT 40	1 - 10	200	30	220	29 - 50 (29 - 36)	426E (ER16)	257,90	**610**
BT 40	2 - 16	60	40	92	44 - 64 (36 - 46)	430E (ER25)	123,20	**116**
BT 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	116,70	**216**
BT 40	2 - 16	90	40	91	42 - 59 (36 - 41)	430E (ER25)	129,70	**316**
BT 40	2 - 16	105	40	100	35 - 60 (20 - 42)	430E (ER25)	164,50	**168**
BT 40	2 - 16	120	40	91	40 - 65 (36 - 47)	430E (ER25)	188,00	**416**
BT 40	2 - 16	150	40	100	40 - 64 (36 - 45)	430E (ER25)	206,20	**516**
BT 40	2 - 16	200	40	150	40 - 64 (36 - 45)	430E (ER25)	258,00	**616**
BT 40	2 - 20	60	50	55	45 - 64 (42 - 46)	470E (ER32)	123,20	**120**
BT 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	116,70	**220**
BT 40	2 - 20	90	50	100	42 - 76 (42 - 52)	470E (ER32)	129,70	**320**
BT 40	2 - 20	120	50	110	42 - 71 (42 - 53)	470E (ER32)	188,00	**420**
BT 40	2 - 20	150	50	110	42 - 71 (42 - 53)	470E (ER32)	206,20	**520**
BT 40	3 - 26	75	63	78	54 - 59	472E (ER40)	155,60	**226**
BT 40	3 - 26	105	63	93	55 - 71 (48 - 53)	472E (ER40)	181,50	**326**
BT 50	2 - 20	75	50	110	45 - 70 (42 - 53)	470E (ER32)	213,90	**720**
BT 50	2 - 20	105	50	140	45 - 63 (42 - 45)	470E (ER32)	258,00	**820**
BT 50	2 - 20	165	50	200	45 - 74 (42 - 56)	470E (ER32)	369,50	**920**
BT 50	3 - 26	75	63	100	48 - 58	472E (ER40)	226,80	**726**
BT 50	3 - 26	105	63	100	48 - 58	472E (ER40)	271,00	**826**

→ Transmittable torque moments, Page 313

LSCX = clamping depth without back stop screw for shanks
l_2 = with back stop screw 1, dimension in brackets (l_2) = with back stop screw 2
dimension LPR when using tightening nuts with seals 3 mm longer

Spare parts, ER precision collet chuck – Centro-P

Spare parts for collet	Lock nut IK 84 950 ... EUR Y8		Lock nut 84 950 ... EUR Y8		Stop screw 2 83 950 ... EUR Y8		Stop screw 1 83 950 ... EUR Y8	
426E (ER16)	45,38	011	36,28	001	M11x1 - SW6	18,15 341	M11x1 - SW6	12,81 337
430E (ER25)	49,29	013	40,16	003	M18x1,5 - SW6	20,50 432	M18x1,5 - SW6	14,72 431
470E (ER32)	51,87	015	42,72	005	M22x1,5 - SW6	20,50 402	M22x1,5 - SW6	14,72 401
472E (ER40)	70,01	017	58,34	007			M28x1,5 - SW6	13,34 400

ER Precision tapered collet chuck – Centro-P

- ▲ for special tapered nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** nut, **without** backstop

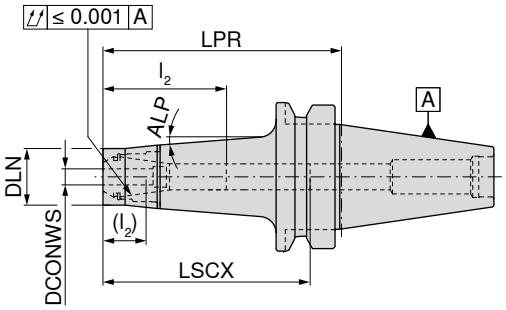

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	ALP	84 517 ... EUR Y8	
BT 40	1 - 10	100	24	72	28 - 48 (20 - 35)	426E (ER16)	4,5°	147,70	**410**
BT 40	1 - 10	135	24	165	28 - 48 (20 - 35)	426E (ER16)	4,5°	189,10	**31000**
BT 40	1 - 10	160	24	180	28 - 48 (20 - 35)	426E (ER16)	4,5°	197,00	**510**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Tapered lock nut IK 84 950 ... EUR Y8		Tapered lock nut 84 950 ... EUR Y8		Stop screw 2 83 950 ... EUR Y8		Stop screw 1 83 950 ... EUR Y8	
426E (ER16)	53,16	033	42,72	031	M11x1 - SW6	18,15 341	M11x1 - SW6	12,81 337

Accessories

ER collet
→ 268–276, 279


Sealing ring
→ 280

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 110–111

Others
→ 284

ER Precision collet chuck, slim version – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** nut, **without** backstop

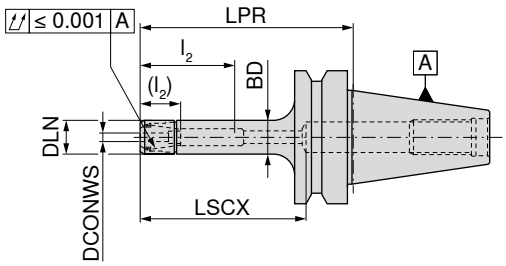

AD
G 2,5 n_{max} 25000

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	BD mm	LSCX mm	l_2 (l_2) mm	for collet	84 507 ... EUR Y8		84 508 ... EUR Y8	
BT 30	1 - 7	50	16	16	68	18 - 32 (12 - 22)	4008E (ER11)	136,20	**007**		
BT 30	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	151,70	**008**		
BT 40	1 - 7	75	16	16	100	15 - 30 (8 - 21)	4008E (ER11)			151,70	**307**
BT 40	1 - 7	90	16	16	68	18 - 36 (12 - 26)	4008E (ER11)			151,70	**40600**
BT 40	1 - 7	120	16	16	140	15 - 30 (8 - 21)	4008E (ER11)			201,00	**507**
BT 40	1 - 7	150	16	16	68	18 - 36 (12 - 26)	4008E (ER11)			224,30	**90600**
BT 40	1 - 10	75	22	22	100	27 - 49 (16 - 32)	426E (ER16)			151,70	**216**
BT 40	1 - 10	90	22	22	115	27 - 49 (16 - 32)	426E (ER16)			151,70	**316**
BT 40	1 - 10	120	22	22	145	27 - 49 (16 - 32)	426E (ER16)			201,00	**416**
BT 40	1 - 10	150	22	22	175	27 - 49 (16 - 32)	426E (ER16)			224,30	**516**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Mini lock nut IK

Mini lock nut

Stop screw 2

Stop screw 1

Spare parts for collet	84 950 ... EUR Y8		84 950 ... EUR Y8		83 950 ...	EUR Y8		83 950 ...	EUR Y8	
4008E (ER11)			42,72	**041**	M8x1 - SW4	17,45	**340**	M8x1 - SW4	12,81	**336**
426E (ER16)	53,15	**035**	42,72	**034**	M11x1 - SW6	18,15	**341**	M11x1 - SW6	12,81	**337**

Accessories

ER collet
→ 268–276, 279


Sealing ring
→ 280

Device
→ 285

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 110–111

Others
→ 284

16

ER precision collet chuck – HDC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body **including** lock nut, **without** backstop screw

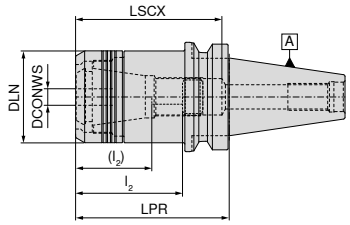

cylindrical



Conical

AD
G 6,3 n_{max} 18000
cylindrical

AD
G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	84 400 ... EUR Y8		84 400 ... EUR Y8	
BT 40	2 - 20	60	53	80	41 - 63 (27 - 45)		470E (ER32)	217,90	**12069**		
BT 40	2 - 20	90	53	85	41 - 63 (27 - 45)		470E (ER32)	226,90	**22069**		
BT 50	2 - 20	75	53	114	41 - 80 (27 - 62)	10	470E (ER32)			337,90	**12068**
BT 50	2 - 20	105	53	140	41 - 80 (27 - 62)	10	470E (ER32)			394,60	**22068**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2

Lock nut

Stop screw 2

Stop screw 1

Spare parts DCONWS	84 950 ... EUR Y8		83 950 ... EUR Y8		83 950 ... EUR Y8	
2 - 20	90,88	**30100**	M22x1,5 - SW6	20,50	**402**	M22x1,5 - SW6	14,72	**401**

Accessories

ER collet
→ 268–276, 278–279

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 110–111

Others
→ 284

HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

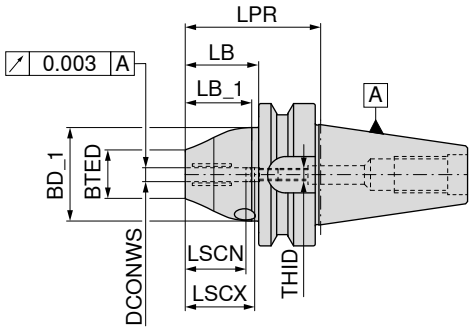



NEW

AD/B
G 2,5 n_{max} 25000

84 254 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
BT 40	6	58,0	26	42	27,2	31,0	37	27	M5	384,30	**10669**
BT 40	8	58,0	28	42	27,2	31,0	37	27	M6	384,30	**10869**
BT 40	10	58,0	30	42	27,2	31,0	41	31	M8x1	384,30	**11069**
BT 40	12	58,0	32	49	27,2	31,0	46	36	M10x1	384,30	**11269**
BT 40	16	72,5	38	49	41,7	45,5	49	38	M12x1	384,30	**11669**
BT 40	20	72,5	38	49	41,7	45,5	51	41	M16x1	384,30	**12069**

→ Min. clamping depth, Page 312

Clamping key – T

Pressure screw

Stop screw IK

Spare parts DCONWS		80 397 ... EUR Y7		83 950 ... EUR Y8		83 950 ... EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56 **55000**	M5x12,5 - SW2,5	10,45 **418**
8	SW5	5,46	**050**	M10x12	7,56 **55000**	M6x12,5 - SW3	10,45 **419**
10	SW5	5,46	**050**	M10x12	7,56 **55000**	M8x1x13,5 - SW3	10,45 **420**
12	SW5	5,46	**050**	M10x12	7,56 **55000**	M10x1x13,5 - SW5	10,45 **421**
16	SW5	5,46	**050**	M10x12	7,56 **55000**	M12x1x13,5 - SW5	10,45 **422**
20	SW5	5,46	**050**	M10x12	7,56 **55000**	M16x1x13,5 - SW8	12,04 **424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 110–111

Others
→ 284

HyPower – Complus

▲ High pressure chuck, short and stable version
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

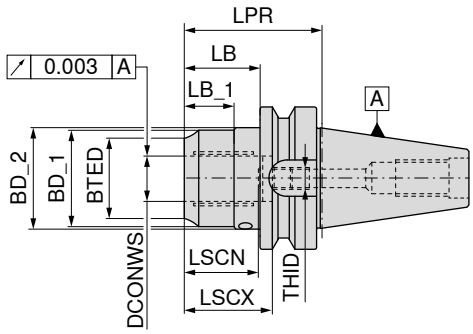

NEW

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB mm	LB_1 mm	LSCX mm	LSCN mm	THID	83 513 ... EUR Y8	
BT 40	20	72,5	38					51	40	M16x1x13,5	310,90	**120**
BT 40	32	90,0	54	63		63,0		61	51	M16x1x13,5	302,70	**13269**
BT 50	20	83,5	38	49		45,5		51	41	M16x1x13,5	376,20	**12068**
BT 50	32	90,0	57	68	72	52,0	35	61	51	M16x1x13,5	376,20	**13268**

→ Min. clamping depth, Page 312

Cylindrical screw

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.	83 950 ...	EUR Y7		80 397 ...	EUR Y7		83 950 ...	EUR Y7		83 950 ...	EUR Y7	
83 513 13269	M5x5 - SW2,5	2,39	**157**	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**
83 513 12068	M5x5 - SW2,5	2,39	**157**	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**
83 513 13268	M5x5 - SW2,5	2,39	**157**	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 110–111

Others
→ 284

HyPower – Access 3°

▲ High pressure chuck, slim 3°
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw, pressure screw and screw plug

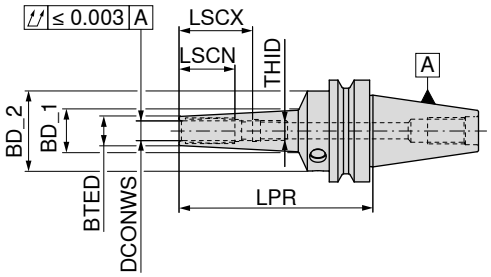

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	THID	83 522 ... EUR Y8	
medium length	BT40	3	120	9	16,55	49,5	28	12	M3	551,60	103
	BT40	4	120	10	17,55	49,5	28	16	M3	551,60	104
	BT40	5	120	11	18,55	49,5	28	20	M3	551,60	105
	BT40	6	120	12	19,55	49,5	37	27	M5	470,50	106
	BT40	8	120	14	21,55	49,5	37	27	M6	470,50	108
	BT40	10	120	16	23,65	49,5	41	31	M8x1	470,50	110
	BT40	12	120	18	25,76	49,5	46	36	M10x1	470,50	112
	BT40	16	120	24	31,45	49,5	49	39	M12x1	755,70	116
	BT40	20	120	28	35,55	49,5	51	41	M16x1	755,70	120
	BT40	6	160	16	33,53	49,5	37	27	M5	708,50	206
	BT40	8	160	18	34,60	49,5	37	27	M6	708,50	208
	BT40	10	160	20	36,27	49,5	41	31	M8x1	708,50	210
	BT40	12	160	22	37,88	49,5	46	36	M10x1	708,50	212
	BT40	6	200	16	37,88	49,5	37	27	M5	796,20	306
	BT40	8	200	18	38,90	49,5	37	27	M6	796,20	308
	BT40	10	200	20	40,57	49,5	41	31	M8x1	796,20	310
	BT40	12	200	22	42,18	49,5	46	36	M10x1	796,20	312

→ Min. clamping depth, Page 312

Cylindrical screw

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.		83 950 ... EUR Y7			80 397 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
83 522 103	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M3x20 - SW1,5	10,86	172
83 522 104	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M3x20 - SW1,5	10,86	172
83 522 105	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M3x20 - SW1,5	10,86	172
83 522 106	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M5x12,5 - SW2,5	10,45	418
83 522 108	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M6x12,5 - SW3	10,45	419
83 522 110	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 522 112	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M10x1x13,5 - SW5	10,45	421
83 522 116	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M12x1x13,5 - SW5	10,45	422
83 522 120	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M16x1x13,5 - SW8	12,04	424
83 522 206	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M5x12,5 - SW2,5	10,45	418
83 522 208	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M6x12,5 - SW3	10,45	419
83 522 210	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 522 212	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M10x1x13,5 - SW5	10,45	421
83 522 306	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M5x12,5 - SW2,5	10,45	418
83 522 308	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x10	15,28	158	M6x12,5 - SW3	10,45	419
83 522 310	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M8x1x13,5 - SW3	10,45	420
83 522 312	M5x5 - SW2,5	2,39	157	SW5	5,46	050	M10x1x12	15,28	159	M10x1x13,5 - SW5	10,45	421

HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

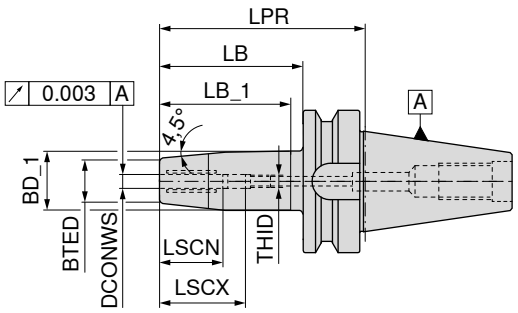

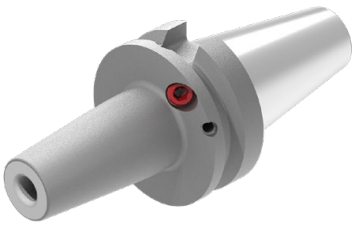

NEW

AD/B
G 2,5 n_{max} 25000

84 255 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
BT 40	6	90	21	27	57,7	63	37	27	M5	459,90	**10669**
BT 40	8	90	21	27	57,7	63	37	27	M6	459,90	**10869**
BT 40	10	90	24	32	57,7	63	41	31	M8x1	459,90	**11069**
BT 40	12	90	24	32	57,7	63	46	36	M10x1	459,90	**11269**
BT 40	16	90	27	34	57,2	63	49	39	M12x1	459,90	**11669**
BT 40	20	90	33	42	57,5	63	51	41	M16x1	459,90	**12069**

→ Min. clamping depth, Page 312

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**

Reduction sleeve
→ 282

Pull studs
→ 110–111

Others
→ 284

HyTens – Fit

▲ Hydraulic chuck, short and slim version
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

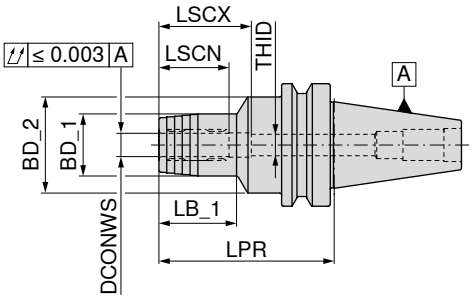

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	LB_1 mm	THID	83 521 ... EUR Y8	
BT 40	6	90	26	49,5	37	27	29	M5	474,50	**106**
BT 40	8	90	28	49,5	37	27	30	M6	474,50	**108**
BT 40	10	90	30	49,5	41	31	35	M8x1	474,50	**110**
BT 40	12	90	32	49,5	46	36	40	M10x1	412,30	**112**
BT 40	16	90	38	49,5	49	39	45	M12x1	474,50	**116**
BT 40	20	90	42	49,5	51	41	47	M16x1	412,30	**120**
BT 40	25	90	55	52,0	57	47	50	M16x1	474,50	**125**
BT 40	32	90	63	62,0	61	51	48	M16x1	474,50	**132**
BT 50	6	90	26	49,5	37	27	29	M5	663,70	**306**
BT 50	8	90	28	49,5	37	27	30	M6	663,70	**308**
BT 50	10	90	30	49,5	41	31	34	M8x1	663,70	**310**
BT 50	12	90	32	49,5	46	36	34	M10x1	601,70	**312**
BT 50	16	90	38	49,5	49	39	35	M12x1	663,70	**316**
BT 50	20	90	42	49,5	51	41	35	M16x1	601,70	**320**
BT 50	25	110	55	63,0	57	47	48	M16x1	663,70	**325**
BT 50	32	110	63	70,0	61	51	50	M16x1	663,70	**332**

→ Min. clamping depth, Page 312

Pressure screw

Stop screw IK

Stop screw IK

Spare parts DCONWS		83 950 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
6	M8x1x10	7,07	**439**				M5x12,5 - SW2,5	10,45	**418**
8	M8x1x10	7,07	**439**	M6x14 - SW2	10,45	**417**	M6x12,5 - SW3	10,45	**419**
10	M10x1x12	7,07	**440**				M8x1x13,5 - SW3	10,45	**420**
12	M10x1x12	7,07	**440**				M10x1x13,5 - SW5	10,45	**421**
16	M10x1x12	7,07	**440**				M12x1x13,5 - SW5	10,45	**422**
20 - 32	M10x1x12	7,07	**440**				M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 110–111

Others
→ 284

HyTens – Compact

▲ Hydraulic chuck, short and stable version
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

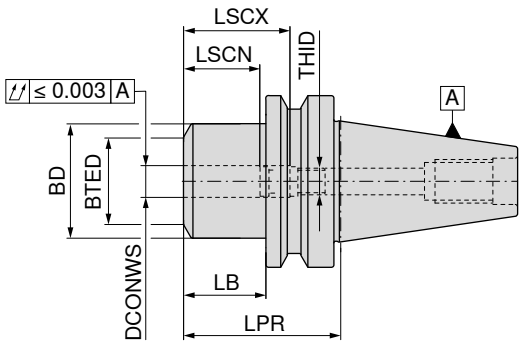



AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCN mm	LSCX mm	THID		83 430 ... EUR Y8	
BT 40	12	58,0	42	32	31,0	36	46	M8x1		196,40	**01269**
BT 40	20	72,5	49	38	45,5	41	51	M16x1		196,40	**02069**
BT 50	20	83,5	49	38	45,5	41	51	M16x1		351,00	**02068**

→ Min. clamping depth, Page 312

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.	80 397 ... EUR Y7		83 950 ... EUR Y7		83 950 ... EUR Y7	
83 430 01269	5,46	**050**	7,07	**440**	10,45	**420**
83 430 02069	5,46	**050**	7,07	**440**	12,04	**424**
83 430 02068	5,46	**050**	7,07	**440**	12,04	**424**

Shrink adapter, Slim 3°

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

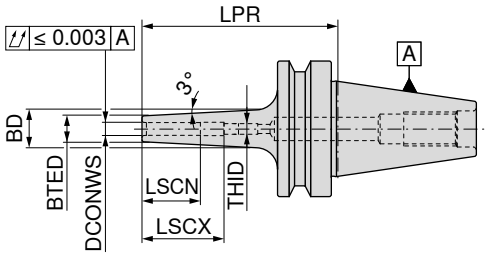

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	84 323 ... EUR Y8	
short	BT 40	3	90	9	15	28	12	M6	206,80	103
	BT 40	4	90	10	16	28	16	M6	201,40	104
	BT 40	5	90	11	17	30	20	M6	201,40	105
	BT 40	6	90	12	18	36	26	M5	178,50	106
	BT 40	8	90	14	20	36	26	M6	178,50	108
	BT 40	10	90	16	22	41	31	M8x1	178,50	110
	BT 40	12	90	18	24	47	37	M10x1	178,50	112
	BT 40	14	90	20	26	47	37	M10x1	178,50	114
	BT 40	16	90	22	28	50	40	M12x1	178,50	116
	BT 40	18	90	24	30	50	40	M12x1	178,50	118
	BT 40	20	90	26	32	52	42	M16x1	178,50	120
medium length	BT 40	3	120	9	16	12	12		231,30	203
	BT 40	4	120	10	17	16	16		227,20	204
	BT 40	5	120	11	18	20	20		227,20	205
	BT 40	6	120	12	21	36	26	M5	202,80	206
	BT 40	8	120	14	23	36	26	M6	202,80	208
	BT 40	10	120	16	25	41	31	M8x1	202,80	210
	BT 40	12	120	18	27	47	37	M10x1	202,80	212
	BT 40	14	120	20	29	47	37	M10x1	202,80	214
	BT 40	16	120	22	31	50	40	M12x1	202,80	216
	BT 40	18	120	24	33	50	40	M12x1	202,80	218
	BT 40	20	120	26	35	52	42	M16x1	202,80	220
extra-long	BT 40	3	160	9	19	12	12		261,00	303
	BT 40	4	160	10	20	16	16		255,60	304
	BT 40	5	160	11	21	20	20		255,60	305
	BT 40	6	160	12	24	36	26	M5	232,60	306
	BT 40	8	160	14	26	36	26	M6	232,60	308
	BT 40	10	160	16	28	41	31	M8x1	232,60	310
	BT 40	12	160	18	30	47	37	M10x1	232,60	312
	BT 40	14	160	20	32	47	37	M10x1	232,60	314
	BT 40	16	160	22	34	50	40	M12x1	232,60	316
	BT 40	18	160	24	36	50	40	M12x1	232,60	318
	BT 40	20	160	26	38	52	42	M16x1	232,60	320

→ Min. clamping depth, Page 312

Stop screw IK

Stop screw IK

Spare parts DCONWS		83 950 ... EUR Y7			83 950 ... EUR Y7	
3 - 5	M6x14 - SW2	10,45	417			
6				M5x12,5 - SW2,5	10,45	418
8				M6x12,5 - SW3	10,45	419
10				M8x1x13,5 - SW3	10,45	420
12 - 14				M10x1x13,5 - SW5	10,45	421
16 - 18				M12x1x13,5 - SW5	10,45	422
20				M16x1x13,5 - SW8	12,04	424

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

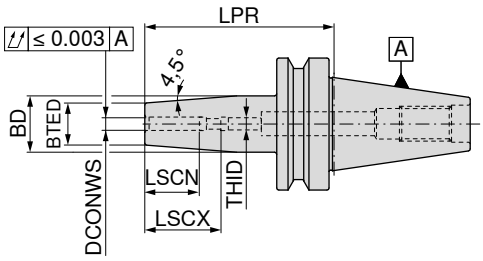



AD
G 2,5 n_{max} 25000

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	84 303 ... EUR Y8		84 303 ... EUR Y8	
short	BT 30	3	85	10	17	28	12	M6	208,30	003		
	BT 30	4	85	15	22	28	16	M6	201,40	004		
	BT 30	5	85	15	22	30	20	M6	201,40	005		
	BT 30	6	85	21	27	36	26	M5	178,50	006		
	BT 30	8	85	21	27	36	26	M6	178,50	008		
	BT 30	10	85	24	32	41	31	M8x1	178,50	010		
	BT 30	12	85	24	32	47	37	M10x1	178,50	012		
	BT 30	14	85	27	34	47	37	M10x1	178,50	014		
	BT 30	16	85	27	34	50	40	M12x1	178,50	016		
	BT 30	18	85	33	42	50	40	M12x1	178,50	018		
	BT 30	20	85	33	42	52	42	M16x1	178,50	020		
	BT 40	3	90	10	17	28	12	M6			183,90	103
	BT 40	4	90	15	22	28	16	M6			177,10	104
	BT 40	5	90	15	22	30	20	M6			177,10	105
	BT 40	6	90	21	27	36	26	M5			158,20	106
	BT 40	8	90	21	27	36	26	M6			158,20	108
	BT 40	10	90	24	32	41	31	M8x1			158,20	110
	BT 40	12	90	24	32	47	37	M10x1			158,20	112
	BT 40	14	90	27	34	47	37	M10x1			158,20	114
	BT 40	16	90	27	34	50	40	M12x1			158,20	116
	BT 40	18	90	33	42	50	40	M12x1			158,20	118
	BT 40	20	90	33	42	52	42	M16x1			158,20	120
	BT 40	25	100	44	53	58	48	M16x1			158,20	125
medium length	BT 40	3	120	10	20	12	12				204,30	203
	BT 40	4	120	15	22	16	16				200,20	204
	BT 40	5	120	15	22	20	20				200,20	205
	BT 40	6	120	21	27	36	26	M5			177,10	206
	BT 40	8	120	21	27	36	26	M6			177,10	208
	BT 40	10	120	24	32	41	31	M8x1			177,10	210
	BT 40	12	120	24	32	47	37	M10x1			177,10	212
	BT 40	14	120	27	34	47	37	M10x1			177,10	214
	BT 40	16	120	27	34	50	40	M12x1			177,10	216
	BT 40	18	120	33	42	50	40	M12x1			177,10	218
	BT 40	20	120	33	42	52	42	M16x1			177,10	220
	BT 40	25	120	44	53	58	48	M16x1			177,10	225
extra-long	BT 40	3	160	10	20	12	12				232,60	303
	BT 40	4	160	15	22	16	16				227,20	304
	BT 40	5	160	15	22	20	20				227,20	305
	BT 40	6	160	21	27	36	26	M5			205,50	306
	BT 40	8	160	21	27	36	26	M6			205,50	308
	BT 40	10	160	24	32	41	31	M8x1			205,50	310
	BT 40	12	160	24	32	47	37	M10x1			205,50	312
	BT 40	14	160	27	34	47	37	M10x1			205,50	314
	BT 40	16	160	27	34	50	40	M12x1			205,50	316
	BT 40	18	160	33	42	50	40	M12x1			205,50	318
	BT 40	20	160	33	42	52	42	M16x1			205,50	320
	BT 40	25	160	44	53	58	48	M16x1			205,50	325

→ Min. clamping depth, Page 312

Spare parts heat shrink adapter 4.5°

		Stop screw IK				Stop screw IK	
		83 950 ...				**83 950 ...**	
Spare parts DCONWS		EUR Y7			EUR Y7		
3 - 5	M6x14 - SW2	10,45	**417**				
6				M5x12,5 - SW2,5	10,45	**418**	
8				M6x12,5 - SW3	10,45	**419**	
10				M8x1x13,5 - SW3	10,45	**420**	
12 - 14				M10x1x13,5 - SW5	10,45	**421**	
16 - 18				M12x1x13,5 - SW5	10,45	**422**	
20 - 25				M16x1x13,5 - SW8	12,04	**424**	

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

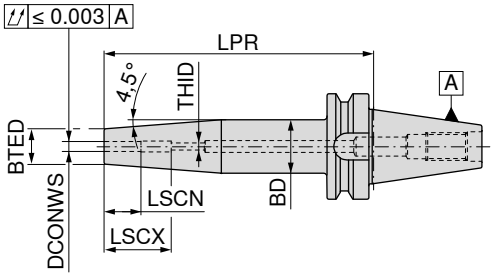

AD/B
G 2,5 n_{max} 25000

82 310 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8/3B	
short	BT 40	3	90	11	15				164,90	**10369**
	BT 40	4	90	11	15				158,20	**10469**
	BT 40	5	90	11	15				158,20	**10569**
	BT 40	6	90	21	27	36	26	M5	142,00	**10669**
	BT 40	8	90	21	27	36	26	M6	142,00	**10869**
	BT 40	10	90	24	34	41	31	M8x1	142,00	**11069**
	BT 40	12	90	24	34	46	36	M10x1	142,00	**11269**
	BT 40	14	90	27	34	46	36	M10x1	142,00	**11469**
	BT 40	16	90	27	34	49	39	M12x1	142,00	**11669**
	BT 40	18	90	33	42	49	39	M12x1	142,00	**11869**
	BT 40	20	90	33	42	51	41	M16x1	142,00	**12069**
	BT 40	25	100	44	53	57	47	M16x1	142,00	**12569**
	BT 50	6	100	21	27	36	26	M5	181,30	**10668**
	BT 50	8	100	21	27	36	26	M6	181,30	**10868**
	BT 50	10	100	24	32	41	31	M8x1	181,30	**11068**
	BT 50	12	100	24	32	47	37	M10x1	181,30	**11268**
	BT 50	14	100	27	34	47	37	M10x1	181,30	**11468**
	BT 50	16	100	27	34	50	40	M12x1	181,30	**11668**
	BT 50	18	100	33	42	50	40	M12x1	181,30	**11868**
	BT 50	20	100	33	42	52	42	M16x1	181,30	**12068**
	BT 50	25	100	44	53	58	48	M16x1	181,30	**12568**
	BT 50	32	100	44	53	62	52	M16x1	181,30	**13268**
medium length	BT 50	6	120	21	27	36	26	M5	199,00	**20668**
	BT 50	8	120	21	27	36	26	M6	199,00	**20868**
	BT 50	10	120	24	32	41	31	M8x1	199,00	**21068**
	BT 50	12	120	24	32	47	37	M10x1	199,00	**21268**
	BT 50	14	120	27	34	47	37	M10x1	199,00	**21468**
	BT 50	16	120	27	34	50	40	M12x1	199,00	**21668**
	BT 50	18	120	33	42	50	40	M12x1	199,00	**21868**
	BT 50	20	120	33	42	52	42	M16x1	199,00	**22068**
	BT 50	25	120	44	53	58	48	M16x1	199,00	**22568**
	BT 50	32	120	44	53	62	52	M16x1	199,00	**23268**

→ Min. clamping depth, Page 312

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

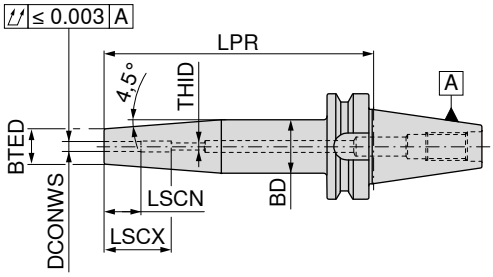

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	82 310 ... EUR Y8/3B	
extra-long	BT 40	6	160	21	27	36	26	M5	183,90	30669
	BT 40	8	160	21	27	36	26	M6	183,90	30869
	BT 40	10	160	24	34	41	31	M8x1	183,90	31069
	BT 40	12	160	24	34	46	36	M10x1	183,90	31269
	BT 40	14	160	27	34	46	36	M10x1	183,90	31469
	BT 40	16	160	27	34	49	39	M12x1	183,90	31669
	BT 40	18	160	33	42	49	39	M12x1	183,90	31869
	BT 40	20	160	33	42	51	41	M16x1	183,90	32069
	BT 40	25	160	44	53	57	47	M16x1	183,90	32569
	BT 50	6	160	21	27	36	26	M5	221,20	30668
	BT 50	8	160	21	27	36	26	M6	221,20	30868
	BT 50	10	160	24	32	41	31	M8x1	221,20	31068
	BT 50	12	160	24	32	47	37	M10x1	221,20	31268
	BT 50	14	160	27	34	47	37	M10x1	221,20	31468
	BT 50	16	160	27	34	50	40	M12x1	221,20	31668
	BT 50	18	160	33	42	50	40	M12x1	221,20	31868
	BT 50	20	160	33	42	52	42	M16x1	221,20	32068
	BT 50	25	160	44	53	58	48	M16x1	221,20	32568
	BT 50	32	160	44	53	62	52	M16x1	221,20	33268

→ Min. clamping depth, Page 312

Stop screw IK

Spare parts DCONWS		82 950 ... EUR Y8/3B	
6	M5x16 - SW2,5	2,72	30000
8	M6x16 - SW3	2,91	30100
10	M8x1x16 - SW4	3,08	30200
12 - 14	M10x1x14 - SW5	3,27	30300
16 - 18	M12x1x16 - SW6	3,44	30400
20 - 32	M16x1x16 - SW8	3,62	30500

16

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

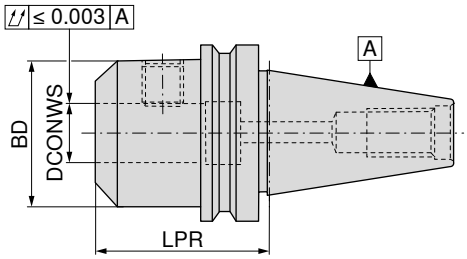

NEW

AD
G 2,5 n_{max} 25000

82 741 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	BT 30	6	50	25	106,00	**10670**
	BT 30	8	50	28	96,54	**10870**
	BT 30	10	50	35	96,54	**11070**
	BT 30	12	55	42	96,54	**11270**
	BT 30	14	55	44	96,54	**11470**
	BT 30	16	63	48	96,54	**11670**
	BT 30	18	63	50	96,54	**11870**
	BT 30	20	63	52	115,60	**12070**
extra short	BT 40	16	35	48	57,00	**01669**
	BT 40	20	35	50	57,00	**02069**
	BT 40	25	40	50	62,31	**02569**[1)]
	BT 40	32	75	72	78,74	**03269**[1)]

1) Version with two grubscrews

Grubscrew

62 950 ...

Spare parts DCONWS		EUR W7	
6	M6x10	0,84	**006**
8	M8x10	0,99	**008**
10	M10x12	1,31	**010**
12 - 14	M12x16	1,32	**012**
16 - 18	M14x16	1,66	**016**
20	M16x16	2,01	**020**
25	M18x2x20	3,66	**025**
32	M20x2x20	4,04	**032**

Accessories

Pull studs
→ 110–111

Others
→ 284

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

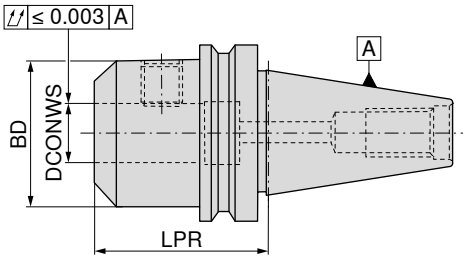



NEW

AD/B
G 2,5 n_{max} 25000

82 740 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	BT 40	6	50	25	52,74	**10669**
	BT 40	8	50	28	52,74	**10869**
	BT 40	10	63	35	49,78	**11069**
	BT 40	12	63	42	49,78	**11269**
	BT 40	14	63	44	49,78	**11469**
	BT 40	16	63	48	53,91	**11669**
	BT 40	18	63	50	53,91	**11869**
	BT 40	20	63	52	53,91	**12069**
	BT 40	25	100	65	59,14	**12569**
	BT 40	32	100	72	64,33	**13269**[1)]
	BT 40	40	120	80	70,36	**14069**[1)]
	BT 50	6	63	25	71,65	**10668**
	BT 50	8	63	28	71,65	**10868**
	BT 50	10	80	35	69,65	**11068**
	BT 50	12	80	42	73,90	**11268**
	BT 50	14	80	44	73,90	**11468**
	BT 50	16	80	48	73,90	**11668**
	BT 50	18	80	50	73,90	**11868**
	BT 50	20	80	52	73,90	**12068**
	BT 50	25	100	65	82,18	**12568**[1)]
	BT 50	32	105	72	83,84	**13268**[1)]
	BT 50	40	120	80	86,91	**14068**[1)]
medium length	BT 40	6	100	25	54,98	**20669**
	BT 40	8	100	28	54,98	**20869**
	BT 40	10	100	35	51,90	**21069**
	BT 40	12	100	42	51,90	**21269**
	BT 40	14	100	44	51,56	**21469**
	BT 40	16	100	48	57,00	**21669**
	BT 40	18	100	50	56,75	**21869**
	BT 40	20	100	52	57,00	**22069**
	BT 50	6	100	25	80,27	**20668**
	BT 50	8	100	28	80,27	**20868**
	BT 50	10	100	35	76,74	**21068**
	BT 50	12	100	42	76,74	**21268**
	BT 50	14	100	44	76,74	**21468**
	BT 50	16	100	48	77,22	**21668**
	BT 50	18	100	50	77,22	**21868**
	BT 50	20	100	52	77,22	**22068**
	BT 50	25	120	65	84,08	**22568**[1)]

1) Version with two grubscrews

16

Continued on next page

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

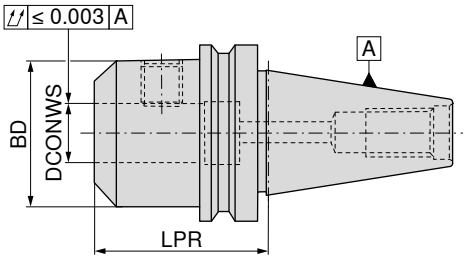



NEW

AD/B
G 2,5 n_{max} 25000

82 740 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
extra-long	BT 40	6	160	25	63,26	**40669**
	BT 40	8	160	28	63,26	**40869**
	BT 40	10	160	35	59,94	**41069**
	BT 40	12	160	42	59,94	**41269**
	BT 40	14	160	44	59,94	**41469**
	BT 40	16	160	48	60,19	**41669**
	BT 40	18	160	50	60,19	**41869**
	BT 40	20	160	52	60,19	**42069**
	BT 40	25	160	65	64,33	**42569**[1)]
	BT 50	6	160	25	98,13	**40668**
	BT 50	8	160	28	98,13	**40868**
	BT 50	10	160	35	98,26	**41068**
	BT 50	12	160	42	98,26	**41268**
	BT 50	14	160	44	98,26	**41468**
	BT 50	16	160	48	97,78	**41668**
	BT 50	18	160	50	97,78	**41868**
	BT 50	20	160	52	97,78	**42068**
	BT 50	25	160	65	98,48	**42568**[1)]
	BT 50	32	160	72	98,26	**43268**[1)]

1) Version with two grubscrews

The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

Cylindrical Shank Adapter (Whistle Notch)

- ▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
- ▲ The groove in the flat face is a characteristic feature of the Whistle Notch version
- ▲ also available with Balluff chip **on request**

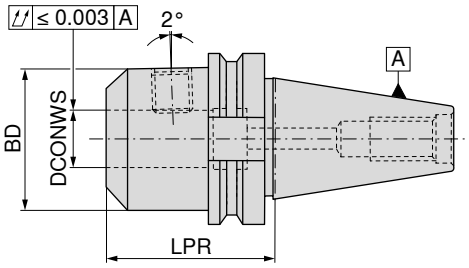



NEW

AD/B
G 2,5 n_{max} 25000

82 742 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	BT 40	6	50	25	65,05	**10669**
	BT 40	8	50	28	65,05	**10869**
	BT 40	10	63	35	60,30	**11069**
	BT 40	12	63	42	60,30	**11269**
	BT 40	14	63	44	60,30	**11469**
	BT 40	16	63	48	66,20	**11669**
	BT 40	18	63	50	66,20	**11869**
	BT 40	20	63	52	66,20	**12069**
	BT 40	25	100	65	84,19	**12569**[1)]
	BT 40	32	100	72	91,75	**13269**[1)]
	BT 40	40	120	80	106,60	**14069**[1)]
	BT 50	6	63	25	111,00	**10668**
	BT 50	8	63	28	111,00	**10868**
	BT 50	10	80	35	106,10	**11068**
	BT 50	12	80	42	106,10	**11268**
	BT 50	14	80	44	106,10	**11468**
	BT 50	16	80	48	106,70	**11668**
	BT 50	18	80	50	106,70	**11868**
	BT 50	20	80	52	106,70	**12068**
	BT 50	25	100	65	116,30	**12568**[1)]
	BT 50	32	105	72	118,20	**13268**[1)]
long	BT 40	6	130	25	81,95	**30669**
	BT 40	8	130	28	81,95	**30869**
	BT 40	10	130	35	76,61	**31069**
	BT 40	12	130	42	76,61	**31269**
	BT 40	16	130	48	82,41	**31669**
	BT 40	20	130	52	82,41	**32069**
	BT 40	25	130	65	98,60	**32569**[1)]
	BT 50	6	130	25	128,90	**30668**
	BT 50	8	130	28	128,90	**30868**
	BT 50	10	130	35	123,00	**31068**
	BT 50	12	130	42	123,00	**31268**
	BT 50	16	130	48	123,00	**31668**
	BT 50	20	130	52	123,00	**32068**
	BT 50	25	130	65	128,90	**32568**[1)]
	BT 50	32	130	72	130,10	**33268**[1)]

1) Version with two grubscrews

16

Spare parts
cylindrical shank adapters (Weldon and Whistle Notch)

		Adjustment screw			Clamping screw			Grubscrew			Backstop screw		
		10 950 ...			**62 950 ...**			**62 950 ...**			**84 950 ...**		
Spare parts DCONWS $_{H4}$		**EUR** W7/6B			**EUR** W7/6B			**EUR** W7			**EUR** Y8	
6							M6x10	0,84	**006**	M5x20	9,70	**44100**
8							M8x10	0,99	**008**	M6x20	4,73	**21500**
10							M10x12	1,31	**010**	M8x16	9,70	**44200**
12 - 14	M10X20 DIN 913	3,47	**17500**				M12x16	1,32	**012**			
16 - 18							M14x16	1,66	**016**	M12x20	9,70	**44300**
20				M16x20 - SW8	1,13	**51200**	M16x16	2,01	**020**			
25							M18x2x20	3,66	**025**	M20x24	9,70	**44000**
32 - 40							M20x2x20	4,04	**032**	M20x24	9,70	**44000**

Accessories

Pull studs

→ 110–111

Others

→ 284

Indexable insert drill adapter ISO 7388- 2 – MAS-BT

▲ also available with Balluff chip **on request**

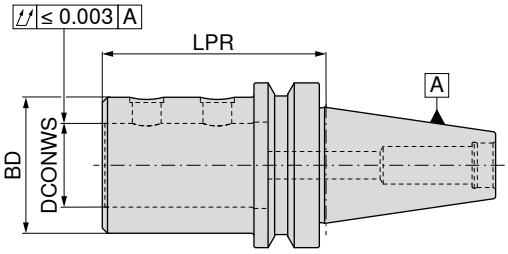

NEW

AD/B
G 6,3 n_{max} 15000

Adapter	DCONWS mm	LPR mm	BD mm		82 748 ... EUR Y8	
BT 40	20	75	40		166,70	**12069**
BT 40	25	80	45		166,70	**12569**
BT 40	32	85	52		166,70	**13269**
BT 50	20	85	40		211,80	**12068**
BT 50	25	90	45		211,80	**12568**
BT 50	32	95	52		211,80	**13268**
BT 50	40	105	65		211,80	**14068**
BT 50	50	113	75		211,80	**15068**

Suitable eccentric sleeves can be found in → **Chapter 3, Indexable insert drilling.**

Grubscrew

Spare parts DCONWS		10 950 ... EUR 2A/28	
20	M10x1x10	4,96	**001**
25 - 32	M12x1x10	5,04	**002**
40 - 50	M16x1x12	5,04	**003**

Accessories

Pull studs
→ 110–111

Others
→ 284

ER Precision Collet chuck – PCC

- ▲ For standard or sealing disc lock nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 100 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body with lock nut and backstop screw

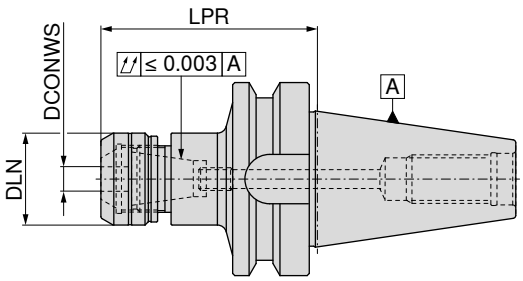

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	for collet	Torque moment / Clamping force Nm	82 700 ... EUR Y8	
BT 40	1 - 10	70	30	426E (ER16)	40 / 2-70	115,70	**11069**
BT 40	1 - 10	100	30	426E (ER16)	40 / 2-70	166,70	**21069**
BT 40	2 - 16	70	40	430E (ER25)	80 / 10-160	115,70	**11669**
BT 40	2 - 16	100	40	430E (ER25)	80 / 10-160	166,70	**21669**
BT 40	2 - 20	70	50	470E (ER32)	125 / 15-250	115,70	**12069**
BT 40	2 - 20	100	50	470E (ER32)	125 / 15-250	166,70	**22069**
BT 50	2 - 16	80	40	430E (ER25)	80 / 10-160	218,00	**11668**
BT 50	2 - 16	100	40	430E (ER25)	80 / 10-160	270,70	**21668**
BT 50	2 - 20	80	50	470E (ER32)	125 / 15-250	218,00	**12068**
BT 50	2 - 20	100	50	470E (ER32)	125 / 15-250	270,70	**22068**

Dimension LPR is 4.5 mm longer for ER16 and ER32 and 5.0 mm longer for ER25 when using thro' coolant lock nut

Spare parts for collet	Lock nut IK 82 950 ... EUR Y8		Lock nut 82 950 ... EUR Y8			Backstop screw PCC 2 82 950 ... EUR Y8		Backstop screw PCC 1 82 950 ... EUR Y8	
426E (ER16)	43,98	**11000**	41,44	**01000**				M8X3,0	4,15	**00100**
430E (ER25)	43,98	**11600**	41,44	**01600**	M18x1,5	5,64	**00200**	M8x8	4,15	**00300**
470E (ER32)	43,98	**12000**	41,44	**02000**	M18x1,5	5,64	**00200**	M8x8	4,15	**00300**

Accessories

ER collet
→ 268–276, 278–279

Sealing ring
→ 281

Roll key
→ 286

ER-Collet chuck

▲ also available with Balluff chip **on request**

Scope of supply:
Holder with lock nut and adjustable back stop

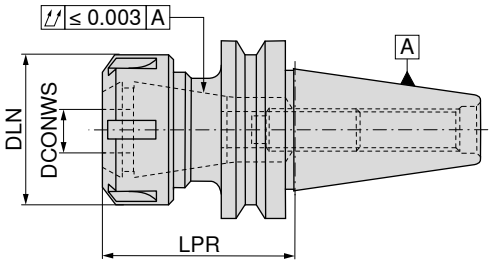



	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	NEW AD G 2,5 n_{max} 25000 82 743 ... EUR Y8		NEW AD/B G 2,5 n_{max} 25000 82 743 ... EUR Y8	
short	BT 30	1 - 10	70	28	56	426E (ER16)	109,40	11070[1)]		
	BT 30	1 - 16	70	42	104	430E (ER25)	109,40	11670		
	BT 30	2 - 20	70	50	136	470E (ER32)	109,40	12070		
	BT 40	1 - 10	60	22	56	426E (ER16 mini)			140,10	11169
	BT 40	1 - 10	60	28	56	426E (ER16)			73,65	11069[1)]
	BT 40	1 - 16	70	42	104	430E (ER25)			76,98	11669
	BT 40	2 - 20	70	50	136	470E (ER32)			77,22	12069
	BT 40	3 - 26	70	63	176	472E (ER40)			80,27	12669
	BT 50	1 - 10	75	28	56	426E (ER16)	98,37	11068[1)]		
	BT 50	1 - 16	75	42	104	430E (ER25)	88,81	11668		
	BT 50	2 - 20	75	50	136	470E (ER32)	93,40	12068		
	BT 50	4 - 26	75	63	176	472E (ER40)	95,30	12668		
medium length	BT 30	1 - 10	100	28	56	426E (ER16)	152,90	21070[1)]		
	BT 30	1 - 16	100	42	104	430E (ER25)	152,90	21670		
	BT 40	1 - 10	120	22	56	426E (ER16 mini)			140,10	21169
	BT 40	1 - 10	120	28	56	426E (ER16)			80,76	21069[1)]
	BT 40	1 - 16	120	42	104	430E (ER25)			84,08	21669
	BT 40	2 - 20	120	50	136	470E (ER32)			84,32	22069
	BT 40	3 - 26	100	63	176	472E (ER40)			104,90	22669
	BT 50	1 - 10	100	28	56	426E (ER16)	109,80	21068[1)]		
	BT 50	1 - 16	100	42	104	430E (ER25)	90,92	21668		
	BT 50	2 - 20	100	50	136	470E (ER32)	97,29	22068		
	BT 50	3 - 26	100	63	176	472E (ER40)	102,60	22668		
extra-long	BT 40	1 - 10	160	28	56	426E (ER16)			113,00	41069[1)]
	BT 40	1 - 16	160	42	104	430E (ER25)			111,90	41669
	BT 40	2 - 20	160	50	136	470E (ER32)			111,90	42069
	BT 40	3 - 26	160	63	176	472E (ER40)			118,30	42669
	BT 50	1 - 16	160	42	104	430E (ER25)	100,70	41668		
	BT 50	2 - 20	160	50	136	470E (ER32)	111,00	42068		

1) with 6 position lock nut

Spare parts for collet	Lock nut 62 950 ... EUR W7		Lock nut IK 83 950 ... EUR Y8		Lock nut 62 950 ... EUR W7		Y clamping key 83 357 ... EUR Y8		ER Mini clamping key 83 950 ... EUR Y8		Mini lock nut 62 950 ... EUR W7		Mini IK 83 950 ... EUR Y8		Stop screw IK 84 950 ... EUR Y8	
426E (ER16 mini)									20,81	101	30,82	066	46,98	058	28,31	44600
426E (ER16)	22,96	044													28,31	44600
430E (ER25)			51,29	055	25,68	055	22,85	125							28,31	44400
470E (ER32)			54,43	056	23,93	65600	31,09	132							28,31	44400
472E (ER40)			64,23	057	23,26	65700	34,22	140							28,31	44500

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

Scope of supply:

Toolholder including clamping key SW4

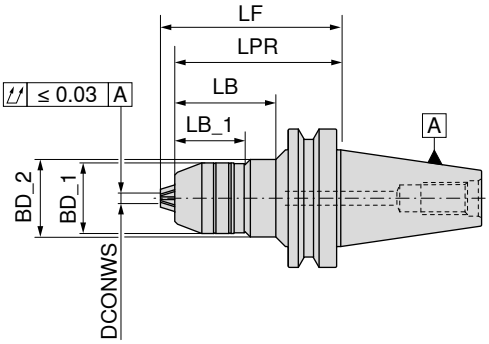

A
G 6,3 n_{max} 10000

AD
G 6,3 n_{max} 10000

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LPR mm	LF mm	84 509 ... EUR Y8		84 510 ... EUR Y8	
BT 40	0,5 - 13	48,5		50,9		80	89,0	278,50	**413**	282,60	**413**
BT 40	2,5 - 16	51,0		50,9		80	90,5	285,10	**416**	306,80	**416**
BT 50	2,5 - 16	51,0	56	50,9	73	120	130,5	378,50	**516**	406,90	**516**

Accessories

Others

→ 284

Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

Synchro tapping chuck with minimum length compensation

- For collets according to DIN 6499
- With length compensation under tension 1,0 mm and under compression 0,2 mm (LZD)
- p_{max} = 50 bar
- for synchro use
- also available with Balluff chip **on request**

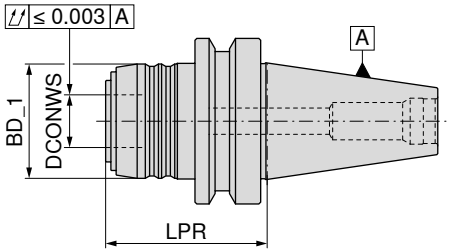

AD

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	83 515 ... EUR Y8	
BT 40	M3 - M12	1	61	43	20	1,0 / 0,2	208,30	**012**
BT 40	M6 - M20	2	82	60	32	1,0 / 0,2	270,40	**020**
BT 50	M3 - M12	1	72	43	20	1,0 / 0,2	225,80	**112**
BT 50	M6 - M20	2	93	60	32	1,0 / 0,2	347,50	**120**

Accessories

Pull studs
110–111

Others
284

Insert for synchro quick change tapping chuck with minimum length compensation

▲ SZID = for insert size

Scope of supply:
Includes lock nut

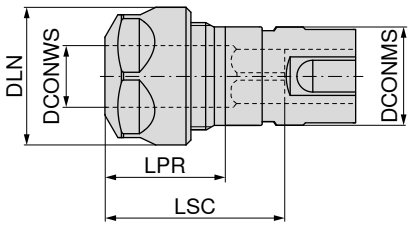



SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	83 608 ... EUR Y8	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	142,00	012 [1]
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	164,90	020

1) with 6 position lock nut

Lock nut

Lock nut IK

Lock nut

Y clamping key

Spare parts for Article no.		62 950 ... EUR W7			83 950 ... EUR Y8			62 950 ... EUR W7		83 357 ... EUR Y8	
83 608 012	M22x1,5 - SW25	22,96	044	M22x1,5	39,48	054	M22x1,5	22,96	054	20,69	116
83 608 020				M32x1,5	51,29	055	M32x1,5	25,68	055	22,85	125

Quick change tap chuck with length compensation

▲ With length compensation under tension and compression (LZD)
▲ also available with Balluff chip **on request**

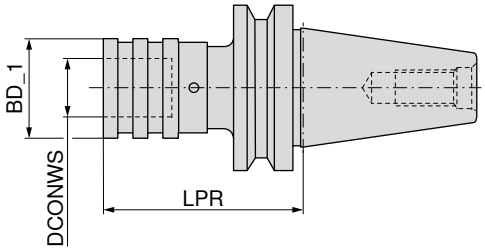

A

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	83 528 ... EUR Y8	
BT 30	M3 - M12	01	63	38	19	9	289,30	**312**
BT 30	M6 - M20	02	96	55	31	15	367,80	**320**
BT 40	M3 - M12	01	68	38	19	9	231,30	**412**
BT 40	M6 - M20	02	93	55	31	15	244,70	**420**
BT 50	M3 - M12	01	80	38	19	9	390,70	**512**
BT 50	M6 - M20	02	102	55	31	15	450,10	**520**

Accessories

Collet
→ 288, 290–292

Pull studs
→ 110–111

Others
→ 284

16

Adapter with ABS Connection

▲ also available with Balluff chip **on request**

Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

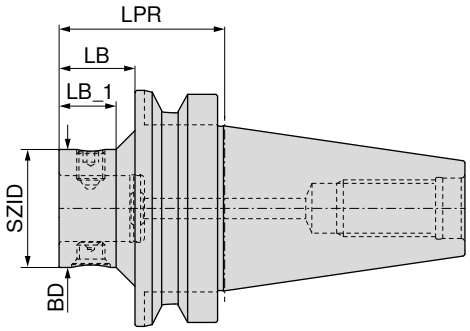

AD

AD/B

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	LB_1 mm	84 202 ... EUR 3E		84 212 ... EUR 3E	
BT 40	A55 00120	ABS 25	25	60	33	25	257,90	**04090**		
BT 40	A55 00130	ABS 32	32	60	33		257,90	**04089**		
BT 40	A55 00140	ABS 40	40	60	33		257,90	**04088**		
BT 40	A55 55150	ABS 50	50	60	33				257,90	**04097**
BT 40	A55 55160	ABS 63	63	70					257,90	**04096**
BT 50	A55 00330	ABS 32	32	70	32	24	290,80	**05089**		
BT 50	A55 00340	ABS 40	40	70	32	24	290,80	**05088**		
BT 50	A55 55350	ABS 50	50	70	32	24			290,80	**05097**
BT 50	A55 55360	ABS 63	63	80	42	37			290,80	**05096**
BT 50	A55 55370	ABS 80	80	100	62				290,80	**05092**
BT 50	A55 55380	ABS 100	100	110					290,80	**05091**

Conversion kit – SK

for	Adapter	84 950 ... EUR W7/6B	
4 mm	SK 40	6,43	**23200**
6 mm	SK 50	6,43	**23400**

Eccentric adjuster with ABS Connection

▲ Adjustment ± 0.25 mm on diameter
▲ also available with Balluff chip **on request**

Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

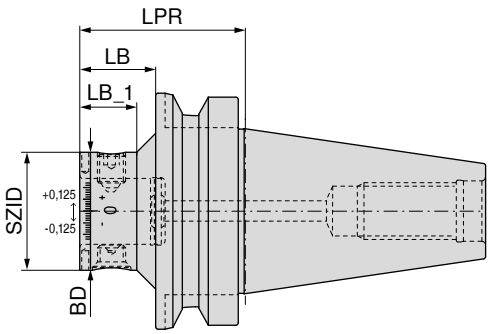

AD

AD/B

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	LB_1 mm	84 205 ... EUR W4/6A		84 205 ... EUR W4/6A	
BT 40	A55 56150	ABS 50	50	60	33				518,80	**04097**
BT 40	A55 56160	ABS 63	63	70			518,80	**04096**		
BT 50	A55 56350	ABS 50	50	70	32	24			552,70	**05097**
BT 50	A55 56360	ABS 63	63	80	42	37	552,70	**05096**		

Torsional vibration dampers with ABS Connection

▲ also available with Balluff chip **on request**

Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

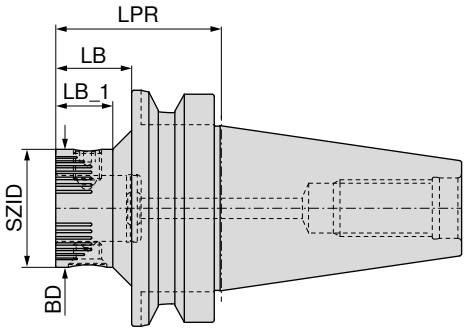



AD/B

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	LB_1 mm	84 208 ... EUR 3E	
BT 40	A55 02150	ABS 50	50	60	33		752,50	**04097**
BT 40	A55 02160	ABS 63	63	70			746,50	**04096**
BT 50	A55 02350	ABS 50	50	70	32	24	830,40	**05097**
BT 50	A55 02360	ABS 63	63	80	42	37	902,40	**05096**

Clamping screw

Taper screw

Spare parts SZID	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**

Accessories

Pull studs → 110–111

Extension → 187

Others → 284

Adapter for milling cutters with threaded end

▲ also available with Balluff chip **on request**

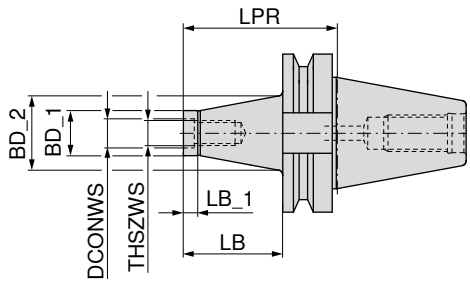

AD
G 6,3 n_{max} 18000

56 711 ...

Adapter	THSZWS	DCONWS	LB	BD_1	BD_2	LB_1	LPR	EUR WA	
		mm	mm	mm	mm	mm	mm		
BT 40	M8	8,5	25	13,8	15	12	52	122,90	**081**
BT 40	M8	8,5	50	13,8	23	12	77	131,70	**082**
BT 40	M8	8,5	75	13,8	25	12	102	142,00	**083**
BT 40	M10	10,5	25	18,0	23	12	52	122,90	**101**
BT 40	M10	10,5	50	18,0	25	12	77	131,70	**102**
BT 40	M10	10,5	75	18,0	30	12	102	142,00	**103**
BT 40	M12	12,5	25	21,0	24	12	52	122,90	**121**
BT 40	M12	12,5	50	21,0	30	12	77	131,70	**122**
BT 40	M12	12,5	75	21,0	35	12	102	142,00	**123**
BT 40	M12	12,5	100	21,0	38	12	127	152,80	**124**
BT 40	M16	17,0	25	29,0	29	12	52	122,90	**161**
BT 40	M16	17,0	50	29,0	34	12	77	131,70	**162**
BT 40	M16	17,0	75	29,0	35	12	102	142,00	**163**
BT 40	M16	17,0	100	29,0	40	12	127	152,80	**164**

Accessories

Extension-Reduction set
→ 257

Pull studs
→ 110–111

Others
→ 284

Combination shell mill adapter

▲ For milling cutters with transverse or longitudinal groove according to DIN 6358
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder with clamping screw, driving ring and dowel spring

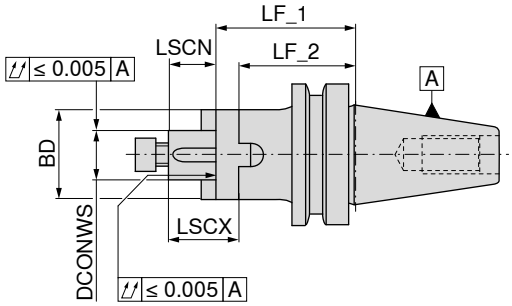

NEW

A
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LF_1 mm	BD mm	LSCX mm	LSCN mm	LF_2 mm	82 744 ... EUR Y8	
short	BT 30	16	45	32	27	17	35	106,00	11670
	BT 30	22	47	40	31	19	35	106,00	12270
	BT 30	27	49	46	33	21	37	112,60	12770
	BT 40	16	55	32	27	17	45	72,83	11669
	BT 40	22	55	40	31	19	43	75,68	12269
	BT 40	27	55	48	33	21	43	77,22	12769
	BT 40	32	60	58	38	24	46	81,60	13269
	BT 40	40	60	70	41	27	46	85,85	14069[1)]
	BT 50	16	70	32	27	17	60	111,80	11668
	BT 50	22	70	40	31	19	58	115,60	12268
	BT 50	27	70	48	33	21	58	124,10	12768
	BT 50	32	70	58	38	24	56	127,80	13268
	BT 50	40	70	70	41	27	56	132,40	14068[1)]
medium length	BT 30	16	80	32	27	17	70	134,90	21670
	BT 30	22	80	40	31	19	68	134,90	22270
	BT 30	27	90	48	33	21	78	137,80	22770
	BT 40	16	100	32	27	17	90	92,04	21669
	BT 40	22	100	40	31	19	88	95,85	22269
	BT 40	27	100	48	33	21	88	97,60	22769
	BT 40	32	100	58	38	24	86	103,00	23269
	BT 40	40	100	70	41	27	86	108,40	24069[1)]

1) With cross screw

Parallel key

Drive ring

Cross nut key

Cross screw

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B		83 370 ... EUR Y8		83 368 ... EUR Y8		83 367 ... EUR Y8		83 950 ... EUR Y8/3B	
16	4 x 4 x 20	2,11	284	12,79	116	13,79	116	M8	4,17	016	M8x25	3,72	113
22	6 x 6 x 25	2,11	285	14,21	122	17,18	122	M10	4,58	022	M10x25	4,28	124
27	7 x 7 x 25	4,04	286	15,28	127	22,03	127	M12	5,85	027	M12x30	4,73	125
32	8 x 7 x 28	2,43	287	18,25	132	28,38	132	M16	9,39	032	M16x35	5,88	126
40	10 x 8 x 32	2,57	288	27,16	140	39,63	140	M20	14,89	040	M20x40 - SW17	8,35	112

Accessories

Pull studs
→ 110–111

Milling Adapter Rings
→ 263


Others
→ 284

Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

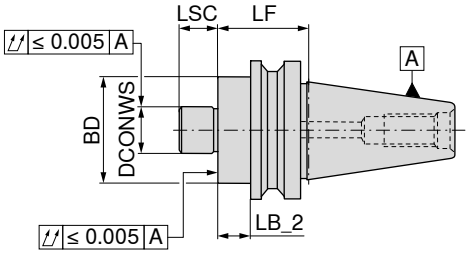

NEW

AD
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	BD mm	LB_2 mm	LF mm	LSC mm		82 315 ... EUR Y8/3B	
short	BT 40	22	38	33	60	19		111,00	**12269**
	BT 40	27	48	25	52	21		107,40	**12769**
	BT 50	22	38	22	60	19		154,20	**12268**
	BT 50	27	48	25	63	21		159,10	**12768**

These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters.
Now they can be clamped perfectly, thanks to the adapted flange diameters.

Screw for drivers

Driver

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B	
22	M4x8	0,75	**51700**	10x7x20,5	10,58	**51500**	M10x25	4,28	**124**
27	M5x8	0,92	**51800**	12x9x24,3	12,06	**51600**	M12x30	4,73	**125**

16

Shell mill adapter

▲ With fixed drive dogs and enlarged contact face for milling cutters with transverse groove
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder with clamping screw

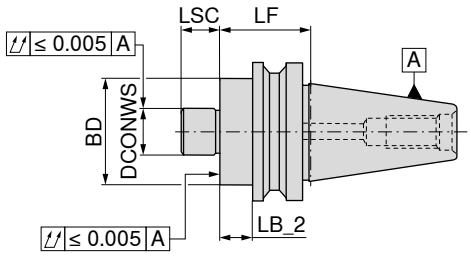



NEW

AD
G 2,5 n_{max} 25000

82 745 ...

NEW

AD/B
G 2,5 n_{max} 25000

82 745 ...

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	EUR Y8		EUR Y8	
short	BT 30	16	18	40	38	17	99,65	**11670**		
	BT 30	22	18	40	48	19	99,65	**12270**		
	BT 30	27	18	50	58	21	106,00	**12770**		
	BT 30	32	28	50	78	24	116,20	**13270**		
	BT 40	16	25	52	38	17			72,83	**11669**
	BT 40	22	25	52	48	19			77,09	**12269**
	BT 40	27	25	52	58	21			78,62	**12769**
	BT 40	32	23	50	78	24			82,77	**13269**
	BT 40	40	23	50	88	27			90,00	**14069**[1)]
	BT 50	16	25	63	38	17	96,25	**11668**		
	BT 50	22	25	63	48	19	98,60	**12268**		
	BT 50	27	25	63	58	21	101,90	**12768**		
	BT 50	32	22	60	78	24	104,80	**13268**		
	BT 50	40	22	60	88	27	106,20	**14068**[1)]		
medium length	BT 40	16	73	100	38	17			75,32	**21669**
	BT 40	22	73	100	48	19			77,81	**22269**
	BT 40	27	73	100	58	21			79,09	**22769**
	BT 40	32	73	100	78	24			82,90	**23269**
	BT 40	40	73	100	88	27			86,91	**24069**[1)]
	BT 50	16	62	100	38	17	105,20	**21668**		
	BT 50	22	62	100	48	19	107,70	**22268**		
	BT 50	27	62	100	58	21	110,90	**22768**		
	BT 50	32	62	100	78	24	114,40	**23268**		
	BT 50	40	62	100	88	27	116,90	**24068**[1)]		
long	BT 40	16	103	130	38	17			80,04	**31669**
	BT 40	22	103	130	48	19			82,77	**32269**
	BT 40	27	103	130	58	21			84,08	**32769**
	BT 40	32	103	130	78	24			88,10	**33269**
	BT 40	40	103	130	88	27			91,99	**34069**[1)]
	BT 50	16	92	130	38	17	112,30	**31668**		
	BT 50	22	92	130	48	19	114,70	**32268**		
	BT 50	27	92	130	58	21	118,10	**32768**		
	BT 50	32	92	130	78	24	121,90	**33268**		
	BT 50	40	92	130	88	27	124,10	**34068**[1)]		
extra-long	BT 40	16	133	160	38	17			82,77	**41669**
	BT 40	22	133	160	48	19			85,48	**42269**
	BT 40	27	133	160	58	21			86,67	**42769**
	BT 40	32	133	160	78	24			90,69	**43269**
	BT 40	40	133	160	88	27			94,48	**44069**[1)]
	BT 50	16	122	160	38	17	116,20	**41668**		
	BT 50	22	122	160	48	19	118,20	**42268**		
	BT 50	27	122	160	58	21	121,90	**42768**		
	BT 50	32	122	160	78	24	125,30	**43268**		
	BT 50	40	122	160	88	27	127,80	**44068**[1)]		

1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!

Spare parts facemill adapters

Cross nut key

Cross screw

clamping screw

Spare parts DCONWS	83 368 ... EUR Y8		83 367 ... EUR Y8			83 950 ... EUR Y8/3B	
16	13,79	116	M8	4,17	016	M8x25	3,72	113
22	17,18	122	M10	4,58	022	M10x25	4,28	124
27	22,03	127	M12	5,85	027	M12x30	4,73	125
32	28,38	132	M16	9,39	032	M16x35	5,88	126
40	39,63	140	M20	14,89	040	M20x40 - SW17	8,35	112

Screw for drivers

Driver

Spare parts DCONWS	84 950 ... EUR Y8		84 950 ... EUR Y8	
16	M3x12	4,89	162	8x9,8x10	28,76	43400
22	M4x10	4,89	163	10x11,2x12	28,76	43200
27	M4x16	4,89	164	12x12,6x14	28,76	43300
32	M5x16	4,89	166	14x14x22,5	17,98	160
40	M5x16	4,89	166	16x16x23	20,01	161

Accessories

Pull studs
→ 110–111

Extensions
→ 262

Others
→ 284

Large diameter facemill adapter

▲ For milling cutters with keyway or drive slot DIN 6357
▲ also available with Balluff chip **on request**

Scope of supply:
Holder with integrated drive dogs according to DIN 2079 and 4 fixation screws

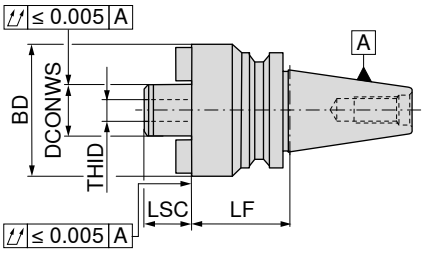



NEW

A
G 6,3 n_{max} 8000

82 432 ...

Adapter	DCONWS mm	LF mm	BD mm	LSC mm	THID		EUR Y8	
BT 50	40	70	89	30	M20		172,60	**14068**
BT 50	60	80	129	40	M30		209,40	**16068**

Screw for drivers

84 950 ...

Driver

84 950 ...

clamping screw

83 950 ...

Spare parts DCONWS		EUR Y8			EUR Y8			EUR Y8/3B	
40	M5x16	4,89	**166**	16x16x23	20,01	**161**	M12x50	4,70	**140**
60	M12x25	4,67	**43500**	25,4x25x26,5	28,76	**43100**	M16x45	12,00	**160**

Accessories

Pull studs
→ 110–111

Others
→ 284

Taper sleeve adapter DIN6383 for DIN 228-2D Morse taper shanks

▲ also available with Balluff chip **on request**

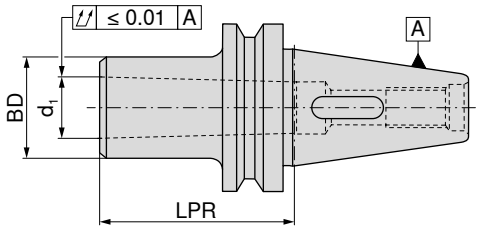

NEW

AD

G 6,3 n_{max} 12000

Adapter	d_1	LPR mm	BD mm	82 746 ... EUR Y8	
BT 30	MK1	50	25	94,63	**11070**
BT 30	MK2	60	32	94,63	**12070**
BT 30	MK3	77	40	102,90	**13070**
BT 40	MK1	50	25	64,09	**11069**
BT 40	MK2	50	32	64,09	**12069**
BT 40	MK3	70	40	68,45	**13069**
BT 40	MK4	95	48	71,42	**14069**
BT 50	MK1	45	25	87,62	**11068**
BT 50	MK2	60	32	90,69	**12068**
BT 50	MK3	65	40	90,69	**13068**
BT 50	MK4	95	48	93,64	**14068**
BT 50	MK5	105	63	101,80	**15068**

Accessories

Morse taper adapter sleeve
→ 242

Pull studs
→ 110–111

Others
→ 284

Milling adapter sleeve

- ▲ For mounting steep taper adapters according to DIN 2080
- ▲ With an extended retaining screw, adapters compliant with ISO 7388-1 – SK, ISO 7388-2 – MAS-BT and ANSI-CAT can also be clamped
- ▲ also available with Balluff chip **on request**

Scope of supply:
Holder with clamping screw for DIN 2080 adapters

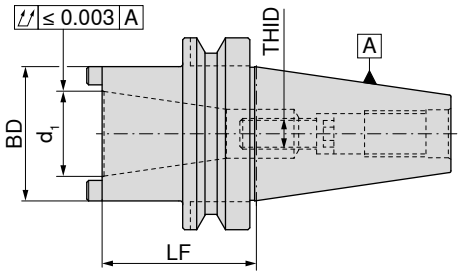



NEW

A
G 6,3 n_{max} 8000

Adapter	d_1	LF mm	BD mm	THID		84 040 ... EUR Y8	
BT 40	SK 30	60	51	M12		154,30	**13069**
BT 40	SK 40	100	63	M16		154,30	**14069**
BT 50	SK 40	80	70	M16		164,20	**14068**

Clamping screw SK

Clamping Screw

Counterscrew

Hollow key with nose

Threaded ring

clamping screw

Spare parts for Article no.	83 950 ... EUR Y8/3B		84 950 ... EUR Y8		83 950 ... EUR Y8/3B		83 359 ... EUR Y8/3B		84 950 ... EUR Y8		83 950 ... EUR Y8/3B	
84 040 13069					0,61	**030**	26,91	**017**	33,13	**127**	4,73	**125**
84 040 14069	8,35	**264**	4,67	**43700**	0,61	**030**	40,55	**133**	30,91	**43800**		
84 040 14068	7,54	**009**	4,67	**43600**								

Screw length required when pulling in ISO 7388-1 – SK, ISO 7388-2 – MAS BT or DIN 2080 shanks

ISO 7388-2 Suitable for article no.	Taper Shank Ø d_1	Clamping screw length ISO 7388-1, ISO 7388-2 THID	Clamping screw length DIN 2080 THID
84 040 13069	SK 30 – BT 30		M12x30 – **83 950 125**
84 040 14069	SK 40 – BT 40	M16x70 – **83 950 264**	M16x45 – **84 950 43700**
84 040 14068	SK 40 – BT 40	M16x65 – **84 950 43600**	M16x40 – **83 950 009**

Accessories

Pull studs
→ 110–111

Others
→ 284

BT/HSK-A adapter

▲ for mounting HSK-A adapters according to ISO 12164
▲ also available with Balluff chip **on request**

Scope of supply:
with clamping cartridge and cover ring

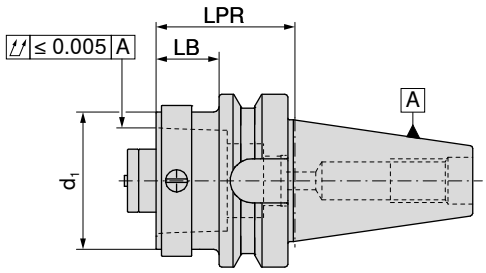

AD

Adapter	d_1	LB mm	LPR mm	84 016 ... EUR Y8	
BT 40	HSK-A 32	13	40	639,40	**04060**
BT 40	HSK-A 40	13	40	651,40	**04059**
BT 40	HSK-A 50	23	50	663,20	**04058**
BT 40	HSK-A 63	43	70	651,40	**04057**
BT 50	HSK-A 32	12	50	805,90	**05060**
BT 50	HSK-A 40	12	50	805,90	**05059**
BT 50	HSK-A 50	22	60	829,50	**05058**
BT 50	HSK-A 63	22	60	877,00	**05057**
BT 50	HSK-A 100	52	90	996,00	**05055**

BT/PSC adapter

▲ for mounting PSC adapters according to ISO 26623-1
▲ also available with Balluff chip **on request**

Scope of supply:
with tightening screw

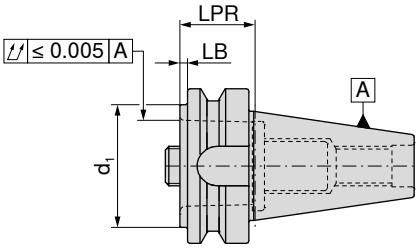

AD

Adapter	d_1	LB mm	LPR mm	84 017 ... EUR Y8	
BT 40	PSC 32	3	30	413,40	**04087**
BT 40	PSC 40	3	30	425,50	**04095**
BT 40	PSC 50	3	30	425,50	**04094**
BT 40	PSC 63	58	85	413,40	**04093**
BT 50	PSC 32	2	40	567,90	**05087**
BT 50	PSC 40	2	40	663,20	**05095**
BT 50	PSC 50	2	40	579,90	**05094**
BT 50	PSC 63	2	40	603,70	**05093**
BT 50	PSC 80	32	70	627,50	**05086**

Threaded ring

tightening screw

Spare parts d_1	84 950 ... EUR Y8			84 950 ... EUR Y8	
PSC 32	33,13	**127**	SW8	23,93	**122**
PSC 40	33,13	**128**	SW8	27,05	**123**
PSC 50	33,13	**129**	SW10	27,05	**124**
PSC 63	66,12	**130**	SW14	30,28	**126**
PSC 80	66,12	**130**	SW14	30,28	**126**

Blank

- ▲ Material: Steel 16MnCr5
- ▲ for production of special tools
- ▲ Diameter BD turned with 0.5 mm oversize
- ▲ Taper hardened and ground
- ▲ Special tool area in soft state
- ▲ also available with Balluff chip **on request**

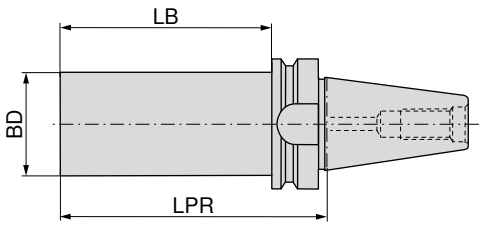

NEW

AD/B

Adapter	BD mm	LPR mm	LB mm	82 747 ... EUR Y8	
BT 40	63,0	250	223	84,89	**16369**
BT 50	63,5	300	262	150,30	**16368**

Test bar

- ▲ Without tool change groove
- ▲ Use for MAS BT 40 special pull studs with 3 mm shorter LF dimension, as standard

Scope of supply:
in wooden box

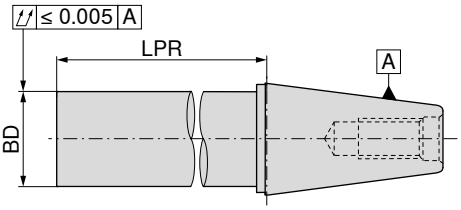

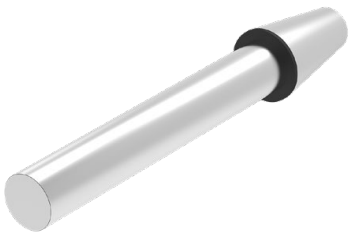

NEW

A

Adapter	BD mm	LPR mm	81 746 ... EUR Y8	
SK / BT 40	40	320	370,10	**14079**
SK / BT 50	50	320	456,30	**15078**

Accessories

Pull studs
→ 110–111

Others
→ 284

ER Precision Collet chuck – Centro-P – BT-FC

- ▲ with face contact
- ▲ for standard or sealed nuts
- ▲ maximum clamping range covered according to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

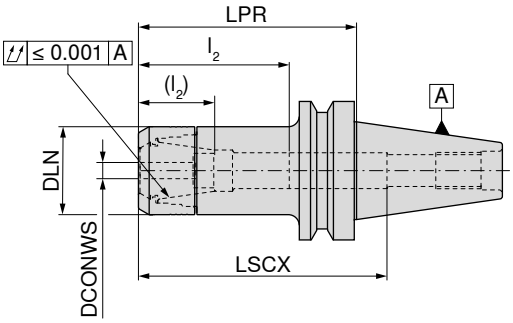

AD

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	84 525 ... EUR Y8	
BT-FC 30	1 - 10	75	30	97	28 - 45 (14 - 31)	426E (ER16)	193,50	**002**
BT-FC 30	1 - 10	90	30	105	29 - 41 (29 - 38)	426E (ER16)	211,50	**00400**
BT-FC 30	1 - 10	120	30	130	29 - 45 (29 - 32)	426E (ER16)	243,10	**00600**
BT-FC 30	2 - 16	75	40	72	38 - 56 (23 - 39)	430E (ER25)	193,40	**012**
BT-FC 30	2 - 20	75	50	84	42 - 62 (24 - 45)	470E (ER32)	193,40	**022**
BT-FC 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	197,40	**102**
BT-FC 40	1 - 10	90	30	115	38 - 53 (29 - 38)	426E (ER16)	202,30	**10400**
BT-FC 40	1 - 10	120	30	145	38 - 53 (29 - 38)	426E (ER16)	258,90	**10600**
BT-FC 40	1 - 16	90	40	84	41 - 64 (36 - 46)	430E (ER25)	202,30	**11400**
BT-FC 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	197,40	**112**
BT-FC 40	2 - 16	120	40	113	41 - 64 (36 - 46)	430E (ER25)	277,30	**11600**
BT-FC 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	197,40	**122**
BT-FC 40	2 - 20	90	50	95	41 - 72 (41 - 55)	470E (ER32)	202,30	**12400**
BT-FC 40	2 - 20	120	50	110	41 - 72 (41 - 55)	470E (ER32)	277,30	**12600**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Lock nut IK

Lock nut

Stop screw 2

Stop screw 1

Spare parts for Article no.	84 950 ... EUR Y8		84 950 ... EUR Y8			83 950 ... EUR Y8			83 950 ... EUR Y8	
84 525 002	45,38	**011**	36,28	**001**	M11x1 - SW6	18,15	**341**	M11x1 - SW6	12,81	**337**
84 525 012	49,29	**013**	40,16	**003**	M18x1,5 - SW6	20,50	**432**	M18x1,5 - SW6	14,72	**431**
84 525 022	51,87	**015**	42,72	**005**	M22x1,5 - SW6	20,50	**402**	M22x1,5 - SW6	14,72	**401**
84 525 102	45,38	**011**	36,28	**001**	M11x1 - SW6	18,15	**341**	M11x1 - SW6	12,81	**337**
84 525 112	49,29	**013**	40,16	**003**	M18x1,5 - SW6	20,50	**432**	M18x1,5 - SW6	14,72	**431**
84 525 122	51,87	**015**	42,72	**005**	M22x1,5 - SW6	20,50	**402**	M22x1,5 - SW6	14,72	**401**

Accessories

ER collet
→ 268–276, 278–279


Sealing ring
→ 280

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 110–111

Others
→ 284

ER precision collet chuck – HDC – BT-FC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body **including** lock nut, **without** backstop screw

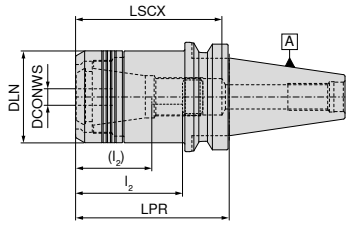

cylindrical



Conical

AD
G 6,3 n_{max} 18000
cylindrical

AD
G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	84 400 ... cylindrical EUR Y8		84 400 ... conical EUR Y8	
BT-FC 40	2 - 20	60	53	80	41 - 63 (27 - 45)		470E (ER32)	328,80	**12064**		
BT-FC 40	2 - 20	90	53	95	41 - 65 (27 - 47)		470E (ER32)	337,90	**22064**		
BT-FC 50	2 - 20	75	53	114	41 - 81 (27 - 63)	10	470E (ER32)			548,00	**12063**
BT-FC 50	2 - 20	105	53	144	41 - 81 (27 - 63)	10	470E (ER32)			553,10	**22063**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2

Lock nut

Stop screw 2

Stop screw 1

Spare parts DCONWS	84 950 ... EUR Y8		83 950 ... EUR Y8		83 950 ... EUR Y8	
2 - 20	90,88	**30100**	20,50	**402**	14,72	**401**

Accessories

ER collet
→ 268–276, 278–279

Roll key
→ 286

Roll key device
→ 286

Pull studs
→ 110–111

Others
→ 284

16

Shrink fit adapters 4.5° – BT-FC

- ▲ with face contact
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

TG

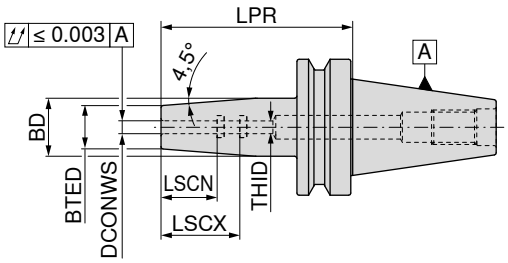



AD
G 2,5 n_{max} 25000

AD/B
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	84 325 ... EUR Y8		84 325 ... EUR Y8	
short	BT-FC 30	3	85	10	17	28	12	M6	186,50	003		
	BT-FC 30	4	85	15	22	28	16	M6	186,50	004		
	BT-FC 30	5	85	15	22	30	20	M6	186,50	005		
	BT-FC 30	6	85	21	27	36	26	M5	186,50	006		
	BT-FC 30	8	85	21	27	36	26	M6	186,50	008		
	BT-FC 30	10	85	24	32	41	31	M8x1	186,50	010		
	BT-FC 30	12	85	24	32	47	37	M10x1	186,50	012		
	BT-FC 30	16	85	27	34	50	40	M12x1	186,50	016		
	BT-FC 30	20	85	33	42	52	42	M16x1	186,50	020		
	BT-FC 40	3	90	10	17	28	12	M6			164,90	103
	BT-FC 40	4	90	15	22	28	16	M6			164,90	104
	BT-FC 40	5	90	15	22	30	20	M6			164,90	105
	BT-FC 40	6	90	21	27	36	26	M5			164,90	106
	BT-FC 40	8	90	21	27	36	26	M6			164,90	108
	BT-FC 40	10	90	24	32	41	31	M8x1			164,90	110
	BT-FC 40	12	90	24	32	47	37	M10x1			164,90	112
	BT-FC 40	16	90	27	34	50	40	M12x1			164,90	116
	BT-FC 40	20	90	33	42	52	42	M16x1			164,90	120
	BT-FC 40	25	100	44	53	58	48	M16x1			164,90	125

→ Min. clamping depth, Page 312

Stop screw IK

Stop screw IK

Spare parts DCONWS		83 950 ... EUR Y7			83 950 ... EUR Y7	
3 - 5	M6x14 - SW2	10,45	417			
6				M5x12,5 - SW2,5	10,45	418
8				M6x12,5 - SW3	10,45	419
10				M8x1x13,5 - SW3	10,45	420
12				M10x1x13,5 - SW5	10,45	421
16				M12x1x13,5 - SW5	10,45	422
20 - 25				M16x1x13,5 - SW8	12,04	424

Accessories

Shrink fit extension
→ 247

Pull studs
→ 110–111

Others
→ 284

HyPower – Complus

▲ High pressure chuck, short and stable version – BT-FC
▲ with face contact
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

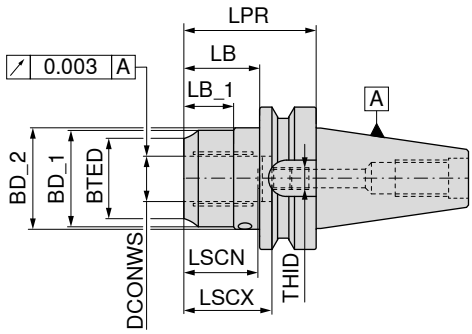

NEW

AD
G 2,5 n_{max} 25000

83 527 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB mm	LB_1 mm	LSCX mm	LSCN mm	THID	EUR Y8	
BT-FC 40	20	72,5	38					51	40	M16x1x13,5	332,60	**120**
BT-FC 40	32	90,0	54	63	62	64,0	48	61	51	M16x1x13,5	325,50	**13274**
BT-FC 50	20	83,5	38	49		47,0		51	41	M16x1x13,5	389,60	**12073**
BT-FC 50	32	90,0	57	68	72	53,5	35	61	51	M16x1x13,5	389,60	**13273**

→ Min. clamping depth, Page 312

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts for Article no.		EUR Y7			EUR Y7			EUR Y7	
83 527 120	SW5	5,46	**050**	M10x1x10	15,28	**158**	M8x1x13,5 - SW3	10,45	**420**
83 527 13274	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**
83 527 12073	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**
83 527 13273	SW5	5,46	**050**	M10x1x14	5,51	**429**	M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve
→ 282

Pull studs
→ 110–111

Others
→ 284

16

Cylindrical shank adapter (Weldon) – BT-FC

▲ with face contact
▲ for shanks according to DIN 6535 / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

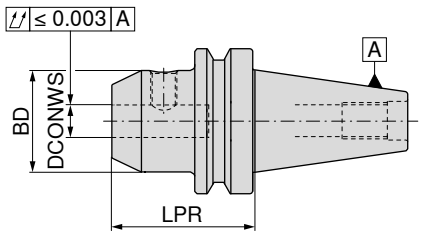

AD
G 2,5 n_{max} 25000

84 552 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8	
short	BT-FC 30	6	50	25	96,94	**006**
	BT-FC 30	8	50	28	96,94	**008**
	BT-FC 30	10	50	35	96,94	**010**
	BT-FC 30	12	50	42	96,94	**012**
	BT-FC 30	16	63	48	104,00	**016**
	BT-FC 30	20	63	52	104,00	**020**
	BT-FC 40	6	50	25	122,90	**106**
	BT-FC 40	8	50	28	118,80	**108**
	BT-FC 40	10	63	35	118,80	**110**
	BT-FC 40	12	63	42	118,80	**112**
	BT-FC 40	16	63	48	118,80	**116**
	BT-FC 40	20	63	52	118,80	**120**
	BT-FC 40	25	90	65	158,20	**125** 1)
	BT-FC 40	32	100	72	158,20	**132** 1)
	BT-FC 50	6	63	25	182,60	**306**
	BT-FC 50	8	63	28	177,10	**308**
	BT-FC 50	10	63	35	177,10	**310**
	BT-FC 50	12	80	42	177,10	**312**
	BT-FC 50	16	80	48	177,10	**316**
	BT-FC 50	20	80	52	177,10	**320**
	BT-FC 50	25	100	65	202,80	**325** 1)
	BT-FC 50	32	105	72	202,80	**332** 1)

1) Version with two grubscrews

Grubscrew

62 950 ...

Spare parts DCONWS		EUR W7	
6	M6x10	0,84	**006**
8	M8x10	0,99	**008**
10	M10x12	1,31	**010**
12	M12x16	1,32	**012**
16	M14x16	1,66	**016**
20	M16x16	2,01	**020**
25	M18x2x20	3,66	**025**
32	M20x2x20	4,04	**032**

Accessories

Pull studs → 110–111
Others → 284

ER Collet chuck – BT-FC

▲ with face contact
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder including nut

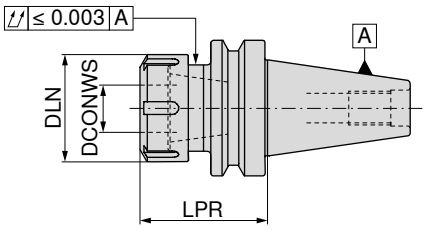

AD
G 2,5 n_{max} 20000

	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	84 557 ... EUR Y8	
short	BT-FC 30	1 - 10	63	28	56	426E (ER16)	109,40	010 1)
	BT-FC 30	1 - 16	60	42	104	430E (ER25)	109,40	016
	BT-FC 30	2 - 20	60	50	136	470E (ER32)	109,40	020
	BT-FC 40	1 - 10	63	28	56	426E (ER16)	137,80	110 1)
	BT-FC 40	1 - 16	60	42	104	430E (ER25)	137,80	116
	BT-FC 40	2 - 20	60	50	136	470E (ER32)	137,80	120
	BT-FC 50	1 - 16	70	42	104	430E (ER25)	187,90	316
	BT-FC 50	2 - 20	70	50	136	470E (ER32)	187,90	320
medium length	BT-FC 50	1 - 10	100	28	56	426E (ER16)	187,90	310 1)

1) with 6 position lock nut

Lock nut

Lock nut IK

Lock nut

Y clamping key

Spare parts for collet		62 950 ... EUR W7		83 950 ... EUR Y8		62 950 ... EUR W7		83 357 ... EUR Y8	
426E (ER16) / BT30-BT50	M22x1,5 - SW25	22,96	044	M22x1,5	39,48	054			
430E (ER25) / BT30-BT50				M32x1,5	51,29	055	M32x1,5	25,68	055	22,85	125
470E (ER32) / BT30-BT50				M40x1,5	54,43	056	M40x1,5	23,93	65600	31,09	132

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

Accessories

ER collet
→ 268–276, 278–279

Pull studs
→ 110–111

Others
→ 284

Adapter with ABS Connection – BT-FC

▲ with face contact
▲ also available with Balluff chip **on request**

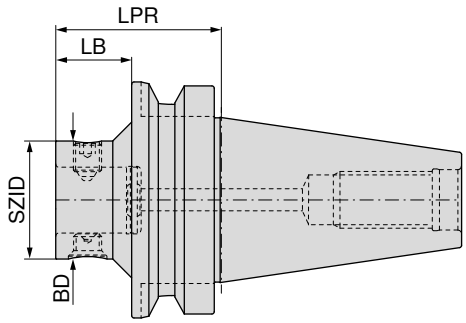

AD

Adapter	SZID	BD mm	LPR mm	LB mm	84 264 ... EUR Y8	
BT-FC 40	ABS 50	50	60	33	625,80	**05064**
BT-FC 40	ABS 63	63	70		643,80	**06364**
BT-FC 50	ABS 50	50	70	32	851,80	**05063**
BT-FC 50	ABS 63	63	80	42	874,70	**06363**
BT-FC 50	ABS 80	80	100	62	888,00	**08063**
BT-FC 50	ABS 100	100	110		897,60	**10063**

Clamping screw

Taper screw

Spare parts SZID	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**
ABS 100	23,21	**25700**	25,41	**25200**

Shell mill adapter – BT-FC

- ▲ with face contact
- ▲ with fixed drive dogs and enlarged contact face for milling cutters with transverse slot
- ▲ also available with Balluff chip **on request**

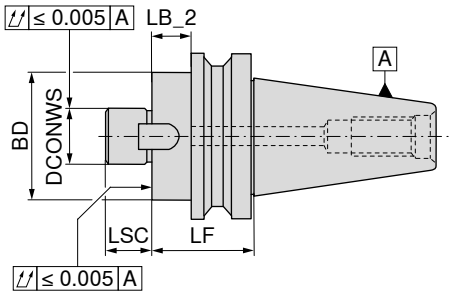

AD
G 6,3 n_{max} 15000

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	84 562 ... EUR Y8	
short	BT-FC 30	16	18	39,0	40	17	106,70	016
	BT-FC 30	22	18	39,0	50	19	106,70	022
	BT-FC 30	27	18	39,0	60	21	106,70	027
	BT-FC 30	32	28	49,0	80	24	106,70	032
	BT-FC 40	16	8	34,0	40	17	128,30	116
	BT-FC 40	22	8	34,0	50	19	128,30	122
	BT-FC 40	27	8	34,0	60	21	128,30	127
	BT-FC 40	32	23	49,0	80	24	128,30	132
	BT-FC 40	40	23	49,0	89	27	128,30	140
	BT-FC 50	22	12	48,5	50	19	148,80	322
	BT-FC 50	27	12	48,5	60	21	148,80	327
	BT-FC 50	32	12	48,5	80	24	158,20	332
	BT-FC 50	40	17	53,5	89	27	158,20	340

Screw for drivers

Driver

clamping screw

Spare parts DCONWS		84 950 ... EUR Y8			84 950 ... EUR Y8			83 950 ... EUR Y8/3B	
16	M3x12	4,89	162	8x9x11	12,40	157	M8x25	3,72	113
22	M4x10	4,89	163	10x11,2x13	14,61	158	M10x25	4,28	124
27	M4x16	4,89	164	12x12,6x15	15,81	159	M12x30	4,73	125
32	M5x16	4,89	165	14x14x22,5	17,98	160	M16x35	5,88	126
40	M5x16	4,89	166	16x16x23	20,01	161	M20x40 - SW17	8,35	112

Accessories

Pull studs	Others
→ 110–111	→ 284

16

Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 15° Form A

Scope of supply:
including O-Ring





Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	83 532 ... EUR Y8	
BT 40	19	14	23	17	M16	54	29	23	5	5	19	50	8,78	**040**

Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 30° Form A and B

Scope of supply:
including O-Ring





Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	82 533 ... EUR Y8		82 531 ... EUR Y8	
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0	2,2	13	20	A			12,94	**030**
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5	4,0	19	50	A			9,81	**040**
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0	6,0	30	150	A			13,30	**050**
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0		13	20	B	12,16	**030**		
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5		19	50	B	7,62	**040**		
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0		30	150	B	12,27	**050**		

O-Ring

Spare parts BD_4		83 476 ... EUR Y8	
17	BT / SK 40	0,59	**040**
25	BT / SK 50	0,59	**050**

Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 45° Form A and B

Scope of supply:
including O-Ring





Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	82 530 ... EUR Y8		82 534 ... EUR Y8	
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0	2,2	13	20	A			12,94	**030**
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5	4,0	19	50	A			9,81	**040**
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0	6,0	30	150	A			13,30	**050**
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0		13	20	B	12,16	**030**		
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5		19	50	B	7,62	**040**		
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0		30	150	B	12,27	**050**		

Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 90° Form A and B

Scope of supply:
including O-Ring





Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	82 536 ... EUR Y8		82 537 ... EUR Y8	
BT 40	15	10	23	17	M16	60	35	28	5,5	4	19	50	A			9,81	**040**
BT 50	23	17	38	25	M24	85	45	35	8,0	6	30	150	A			13,30	**050**
BT 40	15	10	23	17	M16	60	35	28	5,5		19	50	B	7,62	**040**		
BT 50	23	17	38	25	M24	85	45	35	8,0		30	150	B	12,27	**050**		

ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

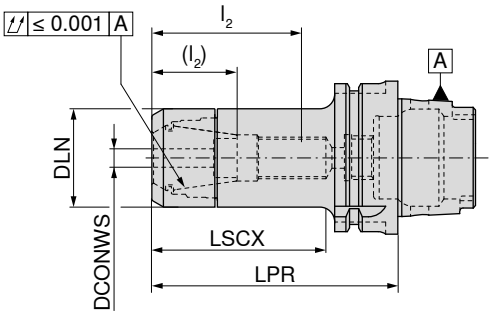

G 2,5 n_{max} 25000

84 722 ...

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	EUR Y8	
HSK-A 40	1 - 10	60	30	40	32 - 54	426E (ER16)	168,50	**401**
HSK-A 40	2 - 16	60	40	40		430E (ER25)	185,30	**404** 1)
HSK-A 40	2 - 20	61	50	45		470E (ER32)	216,40	**407** 1)
HSK-A 50	2 - 16	70	40	49	34 - 35	430E (ER25)	188,00	**505**
HSK-A 50	2 - 16	60	40	37		430E (ER25)	185,30	**504** 1)
HSK-A 63	1 - 10	55	30	32		426E (ER16)	154,20	**609** 1)
HSK-A 63	1 - 10	100	30	71	28 - 45 (16 - 31)	426E (ER16)	154,20	**610**
HSK-A 63	1 - 10	160	30	106	28 - 45 (16 - 31)	426E (ER16)	213,90	**611**
HSK-A 63	1 - 10	200	30	136	28 - 45 (16 - 31)	426E (ER16)	271,00	**612**
HSK-A 63	1 - 10	130	30	87	26 - 50 (17 - 38)	426E (ER16)	190,50	**613**
HSK-A 63	2 - 16	60	40	37		430E (ER25)	154,20	**615**
HSK-A 63	2 - 16	100	40	70	35 - 55 (24 - 37)	430E (ER25)	154,20	**616**
HSK-A 63	2 - 16	160	40	128	35 - 60 (24 - 42)	430E (ER25)	226,80	**617**
HSK-A 63	2 - 16	130	40	89	37 - 60 (12 - 42)	430E (ER25)	203,50	**619**
HSK-A 63	2 - 20	70	50	46		470E (ER32)	154,20	**620**
HSK-A 63	2 - 20	100	50	71	41 - 57 (26 - 39)	470E (ER32)	154,20	**621**
HSK-A 63	2 - 20	160	50	129	52 - 70 (26 - 60)	470E (ER32)	226,80	**622**
HSK-A 63	2 - 20	130	50	101	42 - 69 (18 - 41)	470E (ER32)	203,50	**625**
HSK-A 63	3 - 26	120	63	91		472E (ER40)	243,10	**62700**
HSK-A 63	3 - 26	80	63	56		472E (ER40)	194,40	**626** 2)
HSK-A 100	1 - 10	130	30	101	28 - 48 (16 - 35)	426E (ER16)	350,70	**11200**
HSK-A 100	1 - 10	100	30	70	28 - 48 (16 - 35)	426E (ER16)	283,90	**110**
HSK-A 100	1 - 10	160	30	130	28 - 48 (16 - 35)	426E (ER16)	408,30	**111**
HSK-A 100	1 - 16	100	40	98	40 - 60 (22 - 42)	430E (ER25)	350,70	**11800**
HSK-A 100	2 - 16	160	40	105	38 - 68 (20 - 50)	430E (ER25)	408,30	**117**
HSK-A 100	2 - 16	100	40	71	38 - 56 (20 - 40)	430E (ER25)	283,90	**116**
HSK-A 100	2 - 20	160	50	99	42 - 70 (24 - 52)	470E (ER32)	408,30	**122**
HSK-A 100	2 - 20	100	50	70	42 - 59 (24 - 40)	470E (ER32)	283,90	**121**
HSK-A 100	2 - 20	130	50	97	44 - 69 (41 - 51)	470E (ER32)	350,70	**12400**

1) Item cannot be combined with backstop screw

2) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts
ER precision collet chuck – Centro-P

	Lock nut IK		Lock nut			Stop screw 2		Stop screw 1	
	84 950 ...		**84 950 ...**			**83 950 ...**		**83 950 ...**	
Spare parts for collet	**EUR** Y8		**EUR** Y8			**EUR** Y8		**EUR** Y8	
426E (ER16)	45,38	**011**	36,28	**001**					
426E (ER16)	45,38	**011**	36,28	**001**	M11x1 - SW6	18,15	**341**	M11x1 - SW6	12,81 **337**
430E (ER25)	49,29	**013**	40,16	**003**	M18x1,5 - SW6	20,50	**432**	M18x1,5 - SW6	14,72 **431**
470E (ER32)	51,87	**015**	42,72	**005**	M22x1,5 - SW6	20,50	**402**	M22x1,5 - SW6	14,72 **401**
472E (ER40)	70,01	**017**	58,34	**007**				M28x1,5 - SW6	13,34 **400**

ER Precision tapered collet chuck – Centro-P

- ▲ for special tapered nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

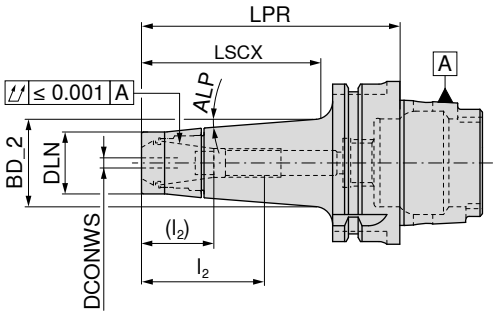

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	BD_2 mm	LSCX mm	l_2 (l_2) mm	ALP	for collet	**84 721 ...** **EUR** Y8	
HSK-A 40	1 - 10	100	24	30,8	67	26 - 47 (12 - 32)	2,0°	426E (ER16)	200,90	**310**
HSK-A 50	1 - 10	65	24	28,9	44	26 - 32	4,5°	426E (ER16)	185,30	**710**
HSK-A 50	1 - 10	100	24	34,4	77	26 - 47 (12 - 32)	4,5°	426E (ER16)	193,20	**810**
HSK-A 63	1 - 10	130	24	36,0	77	28 - 48 (20 - 35)	3,5°	426E (ER16)	214,20	**61200**
HSK-A 63	1 - 10	100	24	33,8	74	28 - 48 (20 - 35)	4,5°	426E (ER16)	164,50	**610**
HSK-A 63	1 - 10	160	24	36,0	106	28 - 48 (20 - 35)	2,5°	426E (ER16)	224,20	**611**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

	Tapered lock nut IK		Tapered lock nut		Stop screw 2		Stop screw 1	
	84 950 ...		**84 950 ...**		**83 950 ...**		**83 950 ...**	
Spare parts for collet	**EUR** Y8		**EUR** Y8		**EUR** Y8		**EUR** Y8	
426E (ER16)	53,16	**033**	42,72	**031**	18,15	**341**	12,81	**337**

ER Precision collet chuck, slim version – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

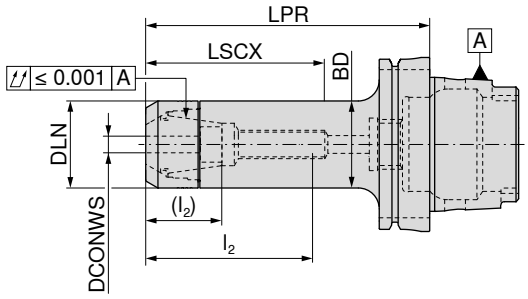



G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BD mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	84 719 ... EUR Y8	
HSK-A 50	1 - 7	130	16	16	60	15 - 32 (7 - 22)	4008E (ER11)	242,30	**407**
HSK-A 63	1 - 7	70	16	16	48	15 - 32 (7 - 22)	4008E (ER11)	164,60	**507**
HSK-A 63	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	164,60	**607**
HSK-A 63	1 - 7	130	16	16	108	15 - 32 (7 - 22)	4008E (ER11)	213,90	**707**
HSK-A 63	1 - 7	160	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	237,20	**608**
HSK-A 63	1 - 10	70	22	22	46	27 - 34 (14 - 20)	426E (ER16)	164,60	**610**
HSK-A 63	1 - 10	100	22	22	62	27 - 44 (14 - 30)	426E (ER16)	164,60	**710**
HSK-A 63	1 - 10	130	22	22	87	27 - 52 (14 - 38)	426E (ER16)	213,90	**810**
HSK-A 63	1 - 10	160	22	22	97	27 - 52 (14 - 38)	426E (ER16)	237,20	**910**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK 84 950 ... EUR Y8		Mini lock nut 84 950 ... EUR Y8			Stop screw 2 83 950 ... EUR Y8		Stop screw 1 83 950 ... EUR Y8	
4008E (ER11)			42,72	**041**	M8x1 - SW4	17,45	**340**	M8x1 - SW4	12,81	**336**
426E (ER16)	53,15	**035**	42,72	**034**	M11x1 - SW6	18,15	**341**	M11x1 - SW6	12,81	**337**

Accessories

ER collet
→ 268–276, 279

Sealing ring
→ 280

Device
→ 285

Roll key
→ 286

Roll key device
→ 286

Coolant transfer pipe
→ 156

Others
→ 284

ER precision collet chuck – HDC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body **including** lock nut, **without** backstop screw



cylindrical



Conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	G 6,3 n_{max} 18000 cylindrical 84 400 ... EUR Y8		G 6,3 n_{max} 18000 conical 84 400 ... EUR Y8	
HSK-A 63	2 - 20	70	53	45	41 - 57 (27 - 39)		470E (ER32)	257,90	**12057**		
HSK-A 63	2 - 20	100	53	72	41 - 57 (27 - 39)		470E (ER32)	257,90	**22057**		
HSK-A 100	2 - 20	100	53	68	41 - 54 (27 - 36)	10	470E (ER32)			428,10	**22055**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2

Lock nut

Stop screw 2

Stop screw 1

Spare parts DCONWS	Lock nut 84 950 ... EUR Y8		Stop screw 2 83 950 ... EUR Y8		Stop screw 1 83 950 ... EUR Y8	
2 - 20	90,88	**30100**	M22x1,5 - SW6 20,50	**402**	M22x1,5 - SW6 14,72	**401**

Accessories

ER collet
→ 268–276, 278–279

Roll key
→ 286

Roll key device
→ 286

Others
→ 284

16

HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

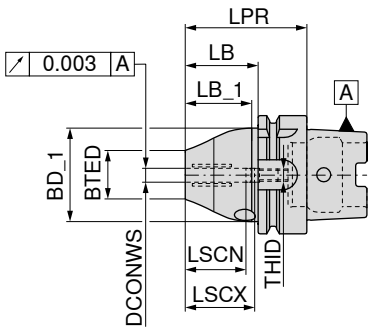

NEW

AD
G 2,5 n_{max} 25000

84 254 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
HSK-A 63	6	65	26	50,0	35,2	39	37	27	M5	388,50	**10657**
HSK-A 63	8	65	28	50,0	35,2	39	37	27	M6	388,50	**10857**
HSK-A 63	10	75	30	50,0	45,2	49	41	31	M8x1	388,50	**11057**
HSK-A 63	12	75	32	52,5	45,2	49	46	36	M8x1	388,50	**11257**
HSK-A 63	16	79	38	52,5	49,2	53	49	39	M8x1	388,50	**11657**
HSK-A 63	20	79	38	52,5	49,2	53	51	41	M8x1	388,50	**12057**
HSK-A 100	6	73	26	50,0	40,2	44	37	27	M5	530,30	**10655**
HSK-A 100	8	73	28	50,0	40,2	44	37	27	M6	530,30	**10855**
HSK-A 100	10	83	30	50,0	50,2	54	41	31	M8x1	530,30	**11055**
HSK-A 100	12	83	32	52,5	50,2	54	46	36	M8x1	530,30	**11255**
HSK-A 100	16	87	38	52,5	54,2	58	49	39	M8x1	530,30	**11655**
HSK-A 100	20	87	38	52,5	54,2	58	51	41	M8x1	530,30	**12055**

→ Min. clamping depth, Page 312

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**

Accessories

Reduction sleeve
→ 282

Coolant transfer pipe
→ 156

Others
→ 284

HyPower – Complus

▲ High pressure chuck, short and stable version
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

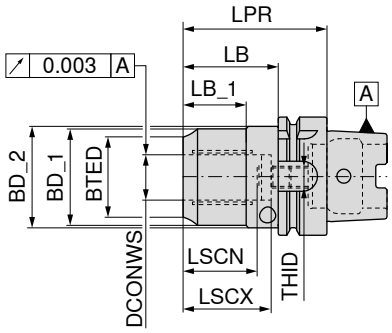

NEW

AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID		83 722 ... EUR Y8	
HSK-A 63	20	80	36	49	52,5	36	54	51	40	M8x1		338,10	**120**
HSK-A 63	32	105	54	63	52,5	55	79	61	51	M16x1		329,40	**13257**
HSK-A 100	20	85	38	49	52,5	36	56	51	41	M8x1		445,30	**12055**
HSK-A 100	32	100	57	68	72,0	42	71	61	51	M8x1		445,30	**13255**

→ Min. clamping depth, Page 312

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.		80 397 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
83 722 120	SW5	5,46	**050**	M10x1x10	15,28	**158**	M8x1x13,5 - SW3	10,45	**420**
83 722 13257	SW5	5,46	**050**	M10x1x10	15,28	**158**	M16x1x13,5 - SW8	12,04	**424**
83 722 12055	SW5	5,46	**050**	M10x1x10	15,28	**158**	M8x1x13,5 - SW3	10,45	**420**
83 722 13255	SW5	5,46	**050**	M10x1x10	15,28	**158**	M8x1x13,5 - SW3	10,45	**420**

Accessories

Reduction sleeve
→ 282

Coolant transfer pipe
→ 156

Others
→ 284

HyPower – Access 3°

▲ High pressure chuck, slim 3°
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

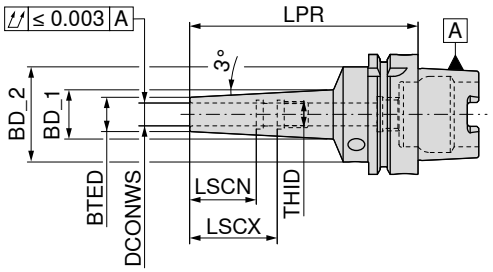

G 2,5 n_{max} 25000

83 727 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	THID	EUR Y8	
medium length	HSK-A 63	3	120	9	16,65	50	28	12	M3	585,30	**603**
	HSK-A 63	4	120	10	17,65	50	28	16	M3	585,30	**604**
	HSK-A 63	5	120	11	18,65	50	28	20	M3	585,30	**605**
	HSK-A 63	6	120	12	19,75	50	37	27	M5	504,20	**606**
	HSK-A 63	8	120	14	21,75	50	37	27	M6	504,20	**608**
	HSK-A 63	10	120	16	23,75	50	41	31	M8x1	504,20	**610**
	HSK-A 63	12	120	18	25,86	50	46	36	M10x1	504,20	**612**
	HSK-A 63	16	120	24	31,50	50	49	39	M12x1	877,30	**616**
	HSK-A 63	20	120	28	35,55	50	51	41	M16x1	877,30	**620**
extra-long	HSK-A 63	6	160	16	33,53	50	37	27	M5	830,10	**706**
	HSK-A 63	8	160	18	34,55	50	37	27	M6	830,10	**708**
	HSK-A 63	10	160	20	36,27	50	41	31	M8x1	830,10	**710**
	HSK-A 63	12	160	22	37,78	50	46	36	M10x1	830,10	**712**
extra long	HSK-A 63	6	200	16	37,83	50	37	27	M5	918,00	**806**
	HSK-A 63	8	200	18	38,85	50	37	27	M6	918,00	**808**
	HSK-A 63	10	200	20	40,57	50	41	31	M8x1	918,00	**810**
	HSK-A 63	12	200	22	42,07	50	46	36	M10x1	918,00	**812**

→ Min. clamping depth, Page 312

Clamping key – T

Pressure screw

Stop screw IK

Spare parts DCONWS		80 397 ... EUR Y7		83 950 ... EUR Y7		83 950 ... EUR Y7	
3	SW5	5,46	**050**	M10x1x10	15,28 **158**	M3x20 - SW1,5	10,86 **172**
4	SW5	5,46	**050**	M10x1x10	15,28 **158**	M3x20 - SW1,5	10,86 **172**
5	SW5	5,46	**050**	M10x1x10	15,28 **158**	M3x20 - SW1,5	10,86 **172**
6	SW5	5,46	**050**	M10x1x10	15,28 **158**	M5x12,5 - SW2,5	10,45 **418**
6	SW5	5,46	**050**	M10x1x10	15,28 **158**	M6x12,5 - SW3	10,45 **419**
8	SW5	5,46	**050**	M10x1x10	15,28 **158**	M6x12,5 - SW3	10,45 **419**
10	SW5	5,46	**050**	M10x1x12	15,28 **159**	M8x1x13,5 - SW3	10,45 **420**
12	SW5	5,46	**050**	M10x1x12	15,28 **159**	M10x1x13,5 - SW5	10,45 **421**
16	SW5	5,46	**050**	M10x1x12	15,28 **159**	M12x1x13,5 - SW5	10,45 **422**
20	SW5	5,46	**050**	M10x1x12	15,28 **159**	M16x1x13,5 - SW8	12,04 **424**

HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

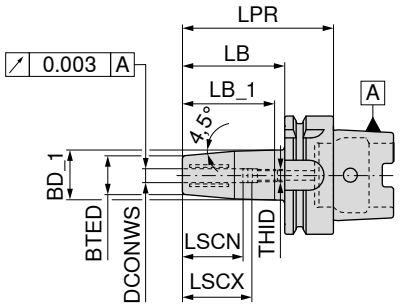

NEW

AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	84 255 ... EUR Y8	
HSK-A 63	6	80	21	27	48,9	54	37	27	M5	472,50	**10657**
HSK-A 63	8	80	21	27	48,9	54	37	27	M6	472,50	**10857**
HSK-A 63	10	85	24	32	53,7	59	41	31	M8x1	472,50	**11057**
HSK-A 63	12	90	24	32	58,6	64	46	36	M10x1	472,50	**11257**
HSK-A 63	16	95	27	34	63,1	69	49	39	M12x1	472,50	**11657**
HSK-A 63	20	100	33	42	68,9	74	51	41	M16x1	472,50	**12057**
HSK-A 100	6	85	21	27	38,7	56	37	27	M5	611,10	**10655**
HSK-A 100	8	85	21	27	38,7	56	37	27	M6	611,10	**10855**
HSK-A 100	10	90	24	32	53,7	61	41	31	M8x1	611,10	**11055**
HSK-A 100	12	95	24	32	58,6	66	46	36	M10x1	611,10	**11255**
HSK-A 100	16	100	27	34	63,1	71	49	39	M12x1	611,10	**11655**
HSK-A 100	20	105	33	42	68,9	76	51	41	M16x1	611,10	**12055**

→ Min. clamping depth, Page 312

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.		80 397 ... EUR Y7			83 950 ... EUR Y8			83 950 ... EUR Y7	
84 255 10657	SW5	5,46	**050**	M10x10	6,14	**55100**	M5x12,5 - SW2,5	10,45	**418**
84 255 10857	SW5	5,46	**050**	M10x10	6,14	**55100**	M6x12,5 - SW3	10,45	**419**
84 255 11057	SW5	5,46	**050**	M10x10	6,14	**55100**	M8x1x13,5 - SW3	10,45	**420**
84 255 11257	SW5	5,46	**050**	M10x10	6,14	**55100**	M10x1x13,5 - SW5	10,45	**421**
84 255 11657	SW5	5,46	**050**	M10x10	6,14	**55100**	M12x1x13,5 - SW5	10,45	**422**
84 255 12057	SW5	5,46	**050**	M10x10	6,14	**55100**	M16x1x13,5 - SW5	12,04	**423**
84 255 10655	SW5	5,46	**050**	M10x10	6,14	**55100**	M5x12,5 - SW2,5	10,45	**418**
84 255 10855	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
84 255 11055	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
84 255 11255	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
84 255 11655	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
84 255 12055	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW5	12,04	**423**

Accessories

Reduction sleeve
→ 282

Coolant transfer pipe
→ 156

Others
→ 284

HyTens – Fit

▲ Hydraulic chuck, short and slim version
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

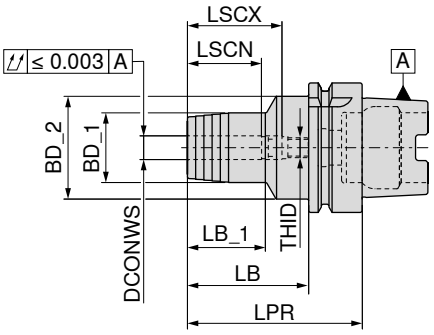

NEW

G 2,5 n_{max} 25000

83 726 ...

	Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	HSK-A 63	6	70	26	49,5	24	44	37	27	M5	516,50	**606**
	HSK-A 63	8	70	28	49,5	24	44	37	27	M6	516,50	**608**
	HSK-A 63	10	80	30	49,5	32	54	41	31	M8x1	516,50	**610**
	HSK-A 63	12	85	32	49,5	40	59	46	36	M10x1	474,50	**612**
	HSK-A 63	16	90	38	49,5	46	64	49	39	M12x1	516,50	**616**
	HSK-A 63	20	90	42	49,5	48	64	51	41	M16x1	474,50	**620**
	HSK-A 63	25	120	57	52,0	63	94	57	47	M16x1	516,50	**625**
	HSK-A 63	32	125	63	53,0	61	99	61	51	M16x1	516,50	**632**
	HSK-A 100	6	75	26	50,0	26	46	37	27	M5	616,40	**10655**
	HSK-A 100	8	75	28	50,0	26	46	37	27	M6	616,40	**10855**
	HSK-A 100	10	90	30	50,0	42	61	41	31	M8x1	616,40	**11055**
	HSK-A 100	12	95	32	50,0	47	66	46	36	M10x1	616,40	**11255**
	HSK-A 100	16	100	38	50,0	53	71	49	39	M12x1	616,40	**11655**
	HSK-A 100	20	105	42	50,0	59	76	51	41	M16x1	616,40	**12055**
	HSK-A 100	25	110	57	63,0	62	81	57	47	M16x1	616,40	**12555**
	HSK-A 100	32	110	63	67,0	62	81	61	51	M16x1	616,40	**13255**

→ Min. clamping depth, Page 312

Version for MMS hydraulic chuck – 1 and 2-channel

83 432	HSK-63	1-channel
83 432	HSK-100	1-channel

This article can be found in our online shop at cuttingtools.ceratizit.com

83 433	HSK-63	2-channel
83 433	HSK-100	2-channel

This article can be found in our online shop at cuttingtools.ceratizit.com

Spare parts **HyTens** – Fit

		Pressure screw			Stop screw IK	
		83 950 ...			83 950 ...	
Spare parts for Article no.		EUR Y7			EUR Y7	
83 726 606	M10x1x12	7,07	**440**	M5x12,5 - SW2,5	10,45	**418**
83 726 608	M10x1x12	7,07	**440**	M6x12,5 - SW3	10,45	**419**
83 726 610	M10x1x12	7,07	**440**	M8x1x13,5 - SW3	10,45	**420**
83 726 612	M10x1x12	7,07	**440**	M10x1x13,5 - SW5	10,45	**421**
83 726 616	M10x1x12	7,07	**440**	M12x1x13,5 - SW5	10,45	**422**
83 726 620	M10x1x12	7,07	**440**	M16x1x13,5 - SW5	12,04	**423**
83 726 625	M10x1x12	7,07	**440**	M16x1x13,5 - SW5	12,04	**423**
83 726 632	M10x1x12	7,07	**440**	M16x1x13,5 - SW5	12,04	**423**
83 726 10655	M10x1x12	7,07	**440**	M5x12,5 - SW2,5	10,45	**418**
83 726 10855	M10x1x12	7,07	**440**	M6x12,5 - SW3	10,45	**419**
83 726 11055	M10x1x12	7,07	**440**	M8x1x13,5 - SW3	10,45	**420**
83 726 11255	M10x1x12	7,07	**440**	M10x1x13,5 - SW5	10,45	**421**
83 726 11655	M10x1x12	7,07	**440**	M12x1x13,5 - SW5	10,45	**422**
83 726 12055	M10x1x12	7,07	**440**	M16x1x13,5 - SW8	12,04	**424**
83 726 12555	M10x1x12	7,07	**440**	M16x1x13,5 - SW8	12,04	**424**
83 726 13255	M10x1x12	7,07	**440**	M16x1x13,5 - SW8	12,04	**424**

Accessories

Reduction sleeve

→ 282

Coolant transfer pipe

→ 156

Others

→ 284

HyTens – Compact

▲ Hydraulic chuck, short and stable version
▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

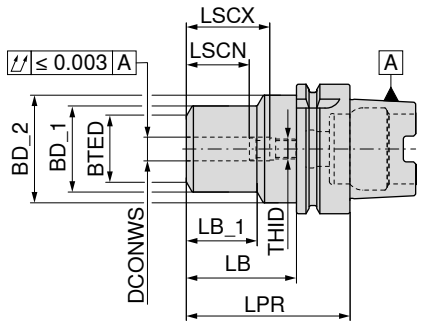

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	BTED mm	LB mm	LB_1 mm	LSCN mm	LSCX mm	THID		83 430 ... EUR Y8	
HSK-A 63	12	80	42	52,5	32	54	34	36	46	M8x1		218,60	**01257**
HSK-A 63	20	80	49	52,5	38	54	36	41	51	M8x1		218,60	**02057**
HSK-A 100	12	85	42	52,5	32	51	34	36	46	M8x1		306,70	**01255**
HSK-A 100	20	85	49	52,5	38	51	36	41	51	M8x1		306,70	**02055**

→ Min. clamping depth, Page 312

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y7			EUR Y7	
12 - 20	SW5	5,46	**050**	M10x1x12	7,07	**440**	M8x1x13,5 - SW3	10,45	**420**

Accessories

Reduction sleeve
→ 282

Coolant transfer pipe
→ 156

Others
→ 284

Shrink adapter, slim 3°

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

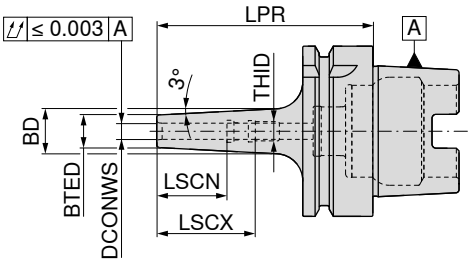

G 2,5 n_{max} 25000

84 324 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	HSK-A 63	3	80	9	14	28	12	M6	209,70	**103**
	HSK-A 63	4	80	10	15	28	16	M6	204,30	**104**
	HSK-A 63	5	80	11	16	30	20	M6	204,30	**105**
	HSK-A 63	6	80	12	17	36	26	M5	185,30	**106**
	HSK-A 63	8	80	14	19	36	26	M6	185,30	**108**
	HSK-A 63	10	85	16	21	41	31	M8x1	185,30	**110**
	HSK-A 63	12	90	18	24	47	37	M10x1	185,30	**112**
	HSK-A 63	14	90	20	26	47	37	M10x1	185,30	**114**
	HSK-A 63	16	95	22	28	50	40	M12x1	185,30	**116**
	HSK-A 63	18	95	24	30	50	40	M12x1	185,30	**118**
	HSK-A 63	20	100	26	33	52	42	M16x1	185,30	**120**
medium length	HSK-A 63	3	120	9	16	12	12		244,70	**203**
	HSK-A 63	4	120	10	17	16	16		239,30	**204**
	HSK-A 63	5	120	11	18	20	20		239,30	**205**
	HSK-A 63	6	120	12	21	36	26	M5	217,80	**206**
	HSK-A 63	8	120	14	23	36	26	M6	217,80	**208**
	HSK-A 63	10	120	16	25	41	31	M8x1	217,80	**210**
	HSK-A 63	12	120	18	27	47	37	M10x1	217,80	**212**
	HSK-A 63	14	120	20	29	47	37	M10x1	220,30	**214**
	HSK-A 63	16	120	22	31	50	40	M12x1	220,30	**216**
	HSK-A 63	18	120	24	33	50	40	M12x1	220,30	**218**
	HSK-A 63	20	120	26	35	52	42	M16x1	220,30	**220**
extra-long	HSK-A 63	3	160	9	19	12	12		271,60	**303**
	HSK-A 63	4	160	10	20	16	16		266,20	**304**
	HSK-A 63	5	160	11	21	20	20		266,20	**305**
	HSK-A 63	6	160	12	24	36	26	M5	246,10	**306**
	HSK-A 63	8	160	14	26	36	26	M6	246,10	**308**
	HSK-A 63	10	160	16	28	41	31	M8x1	246,10	**310**
	HSK-A 63	12	160	18	30	47	37	M10x1	246,10	**312**
	HSK-A 63	14	160	20	32	47	37	M10x1	246,10	**314**
	HSK-A 63	16	160	22	34	50	40	M12x1	246,10	**316**
	HSK-A 63	18	160	24	36	50	40	M12x1	246,10	**318**
	HSK-A 63	20	160	26	38	52	42	M16x1	246,10	**320**

→ Min. clamping depth, Page 312

Stop screw IK

Stop screw IK

83 950 ...

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y7	
3 - 5	M6x14 - SW2	10,45	**417**			
6				M5x12,5 - SW2,5	10,45	**418**
8				M6x12,5 - SW3	10,45	**419**
10				M8x1x13,5 - SW3	10,45	**420**
12 - 14				M10x1x13,5 - SW5	10,45	**421**
16 - 18				M12x1x13,5 - SW5	10,45	**422**
20				M16x1x13,5 - SW8	12,04	**424**

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

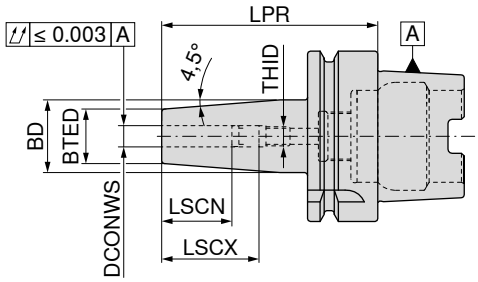

G 2,5 n_{max} 25000

84 304 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	HSK-A 63	3	80	10	15	22	12	M6	143,20	103
	HSK-A 63	4	80	15	22	26	16	M6	143,20	104
	HSK-A 63	5	80	15	22	30	20	M6	143,20	105
	HSK-A 63	6	80	21	27	36	26	M5	143,20	106
	HSK-A 63	8	80	21	27	36	26	M6	143,20	108
	HSK-A 63	10	85	24	32	41	31	M8x1	143,20	110
	HSK-A 63	12	90	24	32	47	37	M10x1	143,20	112
	HSK-A 63	14	90	27	34	47	37	M10x1	143,20	114
	HSK-A 63	16	95	27	34	50	40	M12x1	143,20	116
	HSK-A 63	18	95	33	42	50	40	M12x1	143,20	118
	HSK-A 63	20	100	33	42	52	42	M16x1	143,20	120
	HSK-A 63	25	115	44	53	58	48	M16x1	143,20	125
	HSK-A 63	32	120	44	53	62	52	M16x1	143,20	132
medium length	HSK-A 63	3	120	10	20	12	12		237,80	203
	HSK-A 63	4	120	15	22	16	16		232,60	204
	HSK-A 63	5	120	15	22	20	20		232,60	205
	HSK-A 63	6	120	21	27	36	26	M5	210,90	206
	HSK-A 63	8	120	21	27	36	26	M6	210,90	208
	HSK-A 63	10	120	24	32	41	31	M8x1	210,90	210
	HSK-A 63	12	120	24	32	47	37	M10x1	210,90	212
	HSK-A 63	14	120	27	34	47	37	M10x1	212,20	214
	HSK-A 63	16	120	27	34	50	40	M12x1	212,20	216
	HSK-A 63	18	120	33	42	50	40	M12x1	212,20	218
	HSK-A 63	20	120	33	42	52	42	M16x1	212,20	220
	HSK-A 63	25	120	44	53	58	48	M16x1	212,20	225
extra-long	HSK-A 63	3	160	10	20	12	12		265,00	303
	HSK-A 63	4	160	15	22	16	16		258,10	304
	HSK-A 63	5	160	15	22	20	20		258,10	305
	HSK-A 63	6	160	21	27	36	26	M5	239,30	306
	HSK-A 63	8	160	21	27	36	26	M6	239,30	308
	HSK-A 63	10	160	24	32	41	31	M8x1	239,30	310
	HSK-A 63	12	160	24	32	47	37	M10x1	239,30	312
	HSK-A 63	14	160	27	34	47	37	M10x1	239,30	314
	HSK-A 63	16	160	27	34	50	40	M12x1	239,30	316
	HSK-A 63	18	160	33	42	50	40	M12x1	239,30	318
	HSK-A 63	20	160	33	42	52	42	M16x1	239,30	320
	HSK-A 63	25	160	44	53	62	52	M16x1	239,30	325
extra long	HSK-A 63	6	200	21	27	36	26	M5	285,10	406
	HSK-A 63	8	200	21	27	36	26	M6	285,10	408
	HSK-A 63	10	200	24	32	41	31	M8x1	285,10	410
	HSK-A 63	12	200	24	32	47	37	M10x1	285,10	412
	HSK-A 63	14	200	27	34	47	37	M10x1	285,10	414
	HSK-A 63	16	200	27	34	50	40	M12x1	285,10	416
	HSK-A 63	18	200	33	42	50	40	M12x1	285,10	418
	HSK-A 63	20	200	33	42	52	42	M16x1	285,10	420
	HSK-A 63	25	200	44	53	62	52	M16x1	285,10	425
	HSK-A 63	32	200	44	53	62	52	M16x1	285,10	432

→ Min. clamping depth, Page 312

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

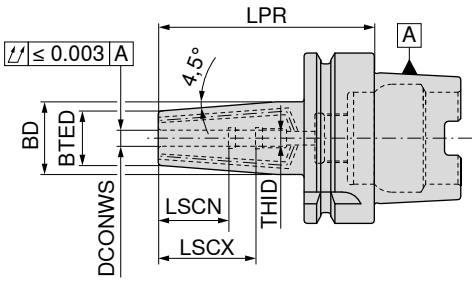

G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	84 316 ... EUR Y8	
short	HSK-A 63	3	80	10	15	28	12	M6	242,00	103
	HSK-A 63	4	80	15	22	28	16	M6	235,20	104
	HSK-A 63	5	80	15	22	30	20	M6	235,20	105
	HSK-A 63	6	80	21	27	36	26	M5	213,70	106
	HSK-A 63	8	80	21	27	36	26	M6	213,70	108
	HSK-A 63	10	85	24	32	41	31	M8x1	213,70	110
	HSK-A 63	12	90	24	32	47	37	M10x1	213,70	112
	HSK-A 63	14	90	27	34	47	37	M10x1	213,70	114
	HSK-A 63	16	95	27	34	50	40	M12x1	213,70	116
	HSK-A 63	18	95	33	42	50	40	M12x1	213,70	118
	HSK-A 63	20	100	33	42	52	42	M16x1	213,70	120
	HSK-A 63	25	115	44	53	58	48	M16x1	213,70	125
	HSK-A 63	32	120	44	53	62	52	M16x1	213,70	132

→ Min. clamping depth, Page 312

Stop screw IK

Stop screw IK

Sealing screw

Spare parts DCONWS		83 950 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
3 - 5	M6x14 - SW2	10,45	417				M2x6	0,61	512
6				M5x12,5 - SW2,5	10,45	418	M2x6	0,61	512
8				M6x12,5 - SW3	10,45	419	M2x6	0,61	512
10				M8x1x13,5 - SW3	10,45	420	M2x6	0,61	512
12 - 14				M10x1x13,5 - SW5	10,45	421	M2x6	0,61	512
16 - 18	M12x1 - SW5	10,48	510				M2x6	0,61	512
20 - 32	M16x1 - SW5	6,20	511				M2x6	0,61	512

Accessories

Shrink fit extension
→ 247

Coolant transfer pipe
→ 156

Others
→ 284

16

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

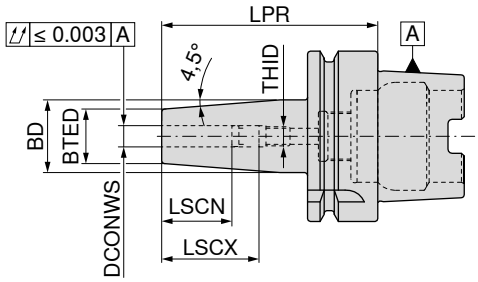

G 2,5 n_{max} 25000

84 305 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	HSK-A 100	6	85	21	27	36	26	M5	261,00	**106**
	HSK-A 100	8	85	21	27	36	26	M6	261,00	**108**
	HSK-A 100	10	90	24	32	41	31	M8x1	261,00	**110**
	HSK-A 100	12	95	24	32	47	37	M10x1	261,00	**112**
	HSK-A 100	14	95	27	34	47	37	M10x1	261,00	**114**
	HSK-A 100	16	100	27	34	50	40	M12x1	261,00	**116**
	HSK-A 100	18	100	33	42	50	40	M12x1	261,00	**118**
	HSK-A 100	20	105	33	42	52	42	M16x1	261,00	**120**
	HSK-A 100	25	115	44	53	58	48	M16x1	261,00	**125**
	HSK-A 100	32	120	44	53	62	52	M16x1	261,00	**132**
medium length	HSK-A 100	6	120	21	27	36	26	M5	301,40	**206**
	HSK-A 100	8	120	21	27	36	26	M6	301,40	**208**
	HSK-A 100	10	120	24	32	41	31	M8x1	301,40	**210**
	HSK-A 100	12	120	24	32	47	37	M10x1	301,40	**212**
	HSK-A 100	14	120	27	34	47	37	M10x1	301,40	**214**
	HSK-A 100	16	120	27	34	50	40	M12x1	301,40	**216**
	HSK-A 100	18	120	33	42	50	40	M12x1	301,40	**218**
	HSK-A 100	20	120	33	42	52	42	M16x1	301,40	**220**
	HSK-A 100	25	120	44	53	58	48	M16x1	301,40	**225**
extra-long	HSK-A 100	6	160	21	27	36	26	M5	348,70	**306**
	HSK-A 100	8	160	21	27	36	26	M6	348,70	**308**
	HSK-A 100	10	160	24	32	41	31	M8x1	348,70	**310**
	HSK-A 100	12	160	24	32	47	37	M10x1	348,70	**312**
	HSK-A 100	14	160	27	34	47	37	M10x1	348,70	**314**
	HSK-A 100	16	160	27	34	50	40	M12x1	348,70	**316**
	HSK-A 100	18	160	33	42	50	40	M12x1	348,70	**318**
	HSK-A 100	20	160	33	42	52	42	M16x1	348,70	**320**
	HSK-A 100	25	160	44	53	58	48	M16x1	348,70	**325**
	HSK-A 100	32	160	44	53	62	52	M16x1	348,70	**332**

→ Min. clamping depth, Page 312

Version for MMS heat shrink adapter 4.5° – 1 and 2-channel

TG

84 318	HSK-63	1-channel
84 318	HSK-100	1-channel

This article can be found in our online shop at cuttingtools.ceratizit.com

TG

84 319	HSK-63	2-channel
84 319	HSK-100	2-channel

This article can be found in our online shop at cuttingtools.ceratizit.com

Spare parts heat shrink adapter 4.5°

Stop screw IK

Spare parts DCONWS		83 950 ... EUR Y7	
6	M5x12,5 - SW2,5	10,45	418
8	M6x12,5 - SW3	10,45	419
10	M8x1x13,5 - SW3	10,45	420
12 - 14	M10x1x13,5 - SW5	10,45	421
16 - 18	M12x1x13,5 - SW5	10,45	422
20 - 32	M16x1x13,5 - SW8	12,04	424

Accessories

Shrink fit extension
→ 247

Coolant transfer pipe
→ 156

Others
→ 284

Shrink fit adapters 4.5°

▲ Version for high clamping force
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Holder with adjustable back stop

TG

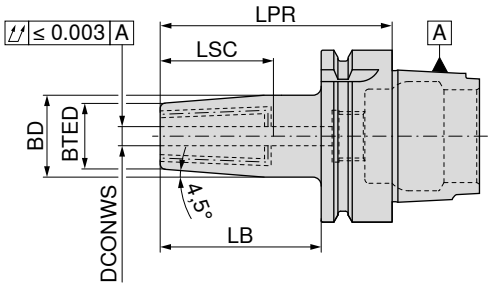

G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LB mm	LSC mm	84 717 ... EUR Y8	
short	HSK-A 63	6	80	21	26	54	36,5	227,20	606
	HSK-A 63	8	80	21	26	54	36,5	227,20	608
	HSK-A 63	10	85	24	30	59	41,5	227,20	610
	HSK-A 63	12	90	24	30	64	46,5	227,20	612
	HSK-A 63	14	90	27	34	64	46,5	227,20	614
	HSK-A 63	16	95	27	34	69	49,5	227,20	616
	HSK-A 63	18	95	33	41	69	49,5	227,20	618
	HSK-A 63	20	100	33	41	74	51,5	227,20	620
	HSK-A 63	25	115	44	52	89	57,5	239,30	625
	HSK-A 63	32	120	44	52	94	61,5	316,40	632
	HSK-A 100	6	85	21	26	56	36,5	320,40	106
	HSK-A 100	8	85	21	26	56	36,5	320,40	108
	HSK-A 100	10	90	24	30	56	41,5	320,40	110
	HSK-A 100	12	95	24	30	66	46,5	320,40	112
	HSK-A 100	14	95	27	34	66	46,5	320,40	114
	HSK-A 100	16	100	27	34	71	49,5	320,40	116
	HSK-A 100	18	100	33	42	71	49,5	320,40	118
	HSK-A 100	20	105	33	42	76	51,5	320,40	120
	HSK-A 100	25	115	44	53	86	57,5	332,60	125
	HSK-A 100	32	120	44	53	91	61,5	342,10	132

→ Min. clamping depth, Page 312

Stop screw IK

Sealing screw

Spare parts DCONWS		62 950 ... EUR W7			62 950 ... EUR W7	
6	M5x0,8x14	8,79	402	M3x6	1,71	411
8	M6x1x16	8,79	403	M3x6	1,71	411
10	M8x1x20	9,87	404	M3x6	1,71	411
12 - 18	M10x1x20	11,03	405	M3x6	1,71	411
20 - 32	M12x1x20	11,40	406	M4x8	1,71	412

Sealing screw for closing of two additional coolant holes.

Accessories

Shrink fit extension
→ 247

Coolant transfer pipe
→ 156

Others
→ 284

Shrink fit adapters 4.5°

▲ Version for high clamping force
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Holder with adjustable back stop

TG

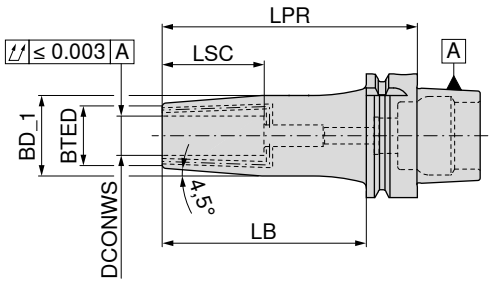

	Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB mm	LSC mm	G 2,5 n_{max} 25000 **84 720 ...** EUR Y8		G 2,5 n_{max} 25000 **84 723 ...** EUR Y8	
long	HSK-A 63	6	130	21	27	104	36,5	316,40	**606**		
	HSK-A 63	8	130	21	27	104	36,5	316,40	**608**		
	HSK-A 63	10	130	24	32	104	41,5	316,40	**610**		
	HSK-A 63	12	130	24	32	104	46,5	316,40	**612**		
	HSK-A 63	14	130	27	34	104	46,5	316,40	**614**		
	HSK-A 63	16	130	27	34	104	49,5	316,40	**616**		
	HSK-A 63	18	130	33	41	104	49,5	316,40	**618**		
	HSK-A 63	20	130	33	41	104	51,5	316,40	**620**		
	HSK-A 100	6	130	21	27	101	36,5	435,20	**106**		
	HSK-A 100	8	130	21	27	101	36,5	435,20	**108**		
	HSK-A 100	10	130	24	32	101	41,5	435,20	**110**		
	HSK-A 100	12	130	24	32	101	46,5	435,20	**112**		
	HSK-A 100	14	130	27	34	101	46,5	435,20	**114**		
	HSK-A 100	16	130	27	34	101	49,5	435,20	**116**		
	HSK-A 100	18	130	33	41	101	49,5	435,20	**118**		
	HSK-A 100	20	130	33	41	101	51,5	435,20	**120**		
extra-long	HSK-A 63	6	160	21	27	134	36,5			347,50	**606**
	HSK-A 63	8	160	21	27	134	36,5			347,50	**608**
	HSK-A 63	10	160	24	32	134	41,5			347,50	**610**
	HSK-A 63	12	160	24	32	134	46,5			347,50	**612**
	HSK-A 63	14	160	27	34	134	46,5			347,50	**614**
	HSK-A 63	16	160	27	34	134	49,5			347,50	**616**
	HSK-A 63	18	160	33	41	134	49,5			347,50	**618**
	HSK-A 63	20	160	33	41	134	51,5			347,50	**620**
	HSK-A 63	25	160	44	52	134	57,5			347,50	**625**
	HSK-A 100	6	160	21	27	131	36,5			477,20	**106**
	HSK-A 100	8	160	21	27	131	36,5			477,20	**108**
	HSK-A 100	10	160	24	32	131	41,5			477,20	**110**
	HSK-A 100	12	160	24	32	131	46,5			477,20	**112**
	HSK-A 100	14	160	27	34	131	46,5			477,20	**114**
	HSK-A 100	16	160	27	34	131	49,5			477,20	**116**
	HSK-A 100	18	160	33	41	131	49,5			477,20	**118**
	HSK-A 100	20	160	33	41	131	51,5			477,20	**120**
	HSK-A 100	25	160	44	53	131	57,5			477,20	**125**
	HSK-A 100	32	160	44	53	131	61,5			477,20	**132**

→ Min. clamping depth, Page 312

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better
▲ also available with Balluff chip **on request**

TG

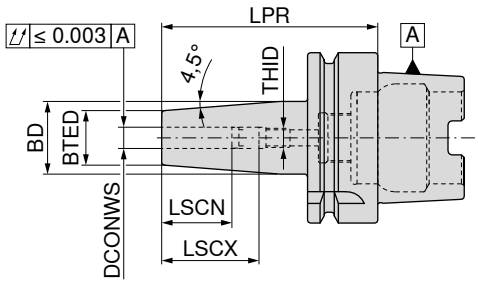

G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	82 310 ... EUR Y8/3B	
short	HSK-A 63	3	80	10	15	22	12		137,80	**10357**
	HSK-A 63	4	80	15	22	26	16		137,80	**10457**
	HSK-A 63	5	80	15	22	30	20		137,80	**10557**
	HSK-A 63	6	80	21	27	36	26	M5	137,80	**10657**
	HSK-A 63	8	80	21	27	36	26	M6	137,80	**10857**
	HSK-A 63	10	85	24	32	41	31	M8x1	137,80	**11057**
	HSK-A 63	12	90	24	32	47	37	M10x1	137,80	**11257**
	HSK-A 63	14	90	27	34	47	37	M10x1	137,80	**11457**
	HSK-A 63	16	95	27	34	50	40	M12x1	137,80	**11657**
	HSK-A 63	18	95	33	42	50	40	M12x1	137,80	**11857**
	HSK-A 63	20	100	33	42	52	42	M16x1	137,80	**12057**
	HSK-A 63	25	115	44	53	58	48	M16x1	137,80	**12557**
	HSK-A 63	32	120	44	53	62	52	M16x1	137,80	**13257**
medium length	HSK-A 63	3	120	10	20	12	12		222,60	**20357**
	HSK-A 63	4	120	15	22	16	16		217,30	**20457**
	HSK-A 63	5	120	15	22	20	20		217,30	**20557**
	HSK-A 63	6	120	21	27	36	26	M5	198,80	**20657**
	HSK-A 63	8	120	21	27	36	26	M6	198,80	**20857**
	HSK-A 63	10	120	24	32	41	31	M8x1	198,80	**21057**
	HSK-A 63	12	120	24	32	47	37	M10x1	198,80	**21257**
	HSK-A 63	14	120	27	34	47	37	M10x1	198,80	**21457**
	HSK-A 63	16	120	27	34	50	40	M12x1	198,80	**21657**
	HSK-A 63	18	120	33	42	50	40	M12x1	198,80	**21857**
	HSK-A 63	20	120	33	42	52	42	M16x1	198,80	**22057**
	HSK-A 63	25	120	44	53	58	48	M16x1	198,80	**22557**
extra-long	HSK-A 63	3	160	10	20	12	12		249,20	**30357**
	HSK-A 63	4	160	15	22	16	16		243,80	**30457**
	HSK-A 63	5	160	15	22	20	20		243,80	**30557**
	HSK-A 63	6	160	21	27	36	26	M5	222,60	**30657**
	HSK-A 63	8	160	21	27	36	26	M6	222,60	**30857**
	HSK-A 63	10	160	24	32	41	31	M8x1	222,60	**31057**
	HSK-A 63	12	160	24	32	47	37	M10x1	222,60	**31257**
	HSK-A 63	14	160	27	34	47	37	M10x1	222,60	**31457**
	HSK-A 63	16	160	27	34	50	40	M12x1	222,60	**31657**
	HSK-A 63	18	160	33	42	50	40	M12x1	222,60	**31857**
	HSK-A 63	20	160	33	42	52	42	M16x1	222,60	**32057**
	HSK-A 63	25	160	44	53	62	52	M16x1	222,60	**32557**

→ Min. clamping depth, Page 312

Stop screw IK

Spare parts DCONWS		82 950 ... EUR Y8/3B	
3 - 5	M6x16 - SW3	2,91	**30100**
6	M5x16 - SW2,5	2,72	**30000**
8	M6x16 - SW3	2,91	**30100**
10	M8x1x16 - SW4	3,08	**30200**
12 - 14	M10x1x14 - SW5	3,27	**30300**
16 - 18	M12x1x16 - SW6	3,44	**30400**
20 - 32	M16x1x16 - SW8	3,62	**30500**

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

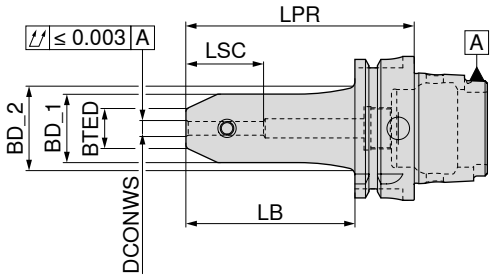

NEW

NEW

	Adapter	DCONWS $_{H5}$	LPR	BTED	BD_1	BD_2	LB	LSC	G 2,5 n_{max} 25000 82 740 ...		G 2,5 n_{max} 25000 82 741 ...	
		mm	mm	mm	mm	mm	mm	mm	EUR Y8/3B		EUR Y8/3B	
short	HSK-A 63	6	65	17	30		39	34	140,60	**10657**	107,00	**10657**
	HSK-A 63	8	65	20	32		39	34	140,60	**10857**	107,00	**10857**
	HSK-A 63	10	65	25	35		39	39	140,60	**11057**	107,00	**11057**
	HSK-A 63	12	80	30	42		54	44	140,60	**11257**	107,00	**11257**
	HSK-A 63	14	80	32	45		54	44	140,60	**11457**	107,00	**11457**
	HSK-A 63	16	80	36	48		54	47	140,60	**11657**	107,00	**11657**
	HSK-A 63	18	80	38	48		54	47	140,60	**11857**	107,00	**11857**
	HSK-A 63	20	80	40	52		54	49	140,60	**12057**	107,00	**12057**
	HSK-A 63	25	110	45	63		84	54	140,60	**12557**[1)]	107,00	**12557**[1)]
	HSK-A 63	32	110	52	72		84	58	140,60	**13257**[1)]	107,00	**13257**[1)]
	HSK-A 100	6	80	17	30		51	34	188,50	**10655**	164,50	**10655**
	HSK-A 100	8	80	20	32		51	34	188,50	**10855**	164,50	**10855**
	HSK-A 100	10	80	25	35		51	39	188,50	**11055**	164,50	**11055**
	HSK-A 100	12	80	30	42		51	44	188,50	**11255**	164,50	**11255**
	HSK-A 100	14	80	32	45		51	44	188,50	**11455**	164,50	**11455**
	HSK-A 100	16	100	36	48		71	47	188,50	**11655**	164,50	**11655**
	HSK-A 100	18	100	38	48		71	47	188,50	**11855**	164,50	**11855**
	HSK-A 100	20	100	40	52		71	49	188,50	**12055**	164,50	**12055**
	HSK-A 100	25	100	45	65		71	54	188,50	**12555**[1)]	164,50	**12555**[1)]
	HSK-A 100	32	100	52	72		71	58	188,50	**13255**[1)]	164,50	**13255**[1)]
	HSK-A 100	40	110	60	80		81	68	188,50	**14055**[1)]	164,50	**14055**[1)]
medium length	HSK-A 63	6	100	17	30	36,2	74	34	153,70	**20657**	122,80	**20657**
	HSK-A 63	8	100	20	32	38,2	74	34	153,70	**20857**	122,80	**20857**
	HSK-A 63	10	100	25	35	41,2	74	39	153,70	**21057**	122,80	**21057**
	HSK-A 63	12	100	30	42		74	44	153,70	**21257**	122,80	**21257**
	HSK-A 63	14	100	32	45		74	44	153,70	**21457**	122,80	**21457**
	HSK-A 63	16	100	36	48		74	47	153,70	**21657**	122,80	**21657**
	HSK-A 63	18	100	38	48		74	47	153,70	**21857**	122,80	**21857**
	HSK-A 63	20	100	40	52		74	49	153,70	**22057**	122,80	**22057**
long	HSK-A 63	6	130	17	30	36,2	104	34	164,20	**30657**	135,30	**30657**
	HSK-A 63	8	130	20	32	38,2	104	34	164,20	**30857**	135,30	**30857**
	HSK-A 63	10	130	25	35	41,2	104	39	164,20	**31057**	135,30	**31057**
	HSK-A 63	12	130	30	42	48,2	104	44	164,20	**31257**	135,30	**31257**
	HSK-A 63	14	130	32	45	50,5	104	44	164,20	**31457**	135,30	**31457**
	HSK-A 63	16	130	36	48	50,1	104	47	164,20	**31657**	135,30	**31657**
	HSK-A 63	18	130	38	48	50,1	104	47	164,20	**31857**	135,30	**31857**
	HSK-A 63	20	130	40	52		104	49	164,20	**32057**	135,30	**32057**
	HSK-A 63	25	130	45	63		104	54	164,20	**32557**[1)]	135,30	**32557**[1)]
	HSK-A 63	32	130	52	72		104	58	164,20	**33257**[1)]	135,30	**33257**[1)]

1) Version with two grubscrews

16

Continued on next page

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

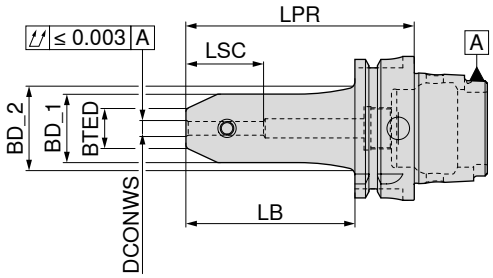

NEW NEW

	Adapter	DCONWS $_{H5}$ mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB mm	LSC mm	G 2,5 n_{max} 25000 **82 740 ...** EUR Y8/3B		G 2,5 n_{max} 25000 **82 741 ...** EUR Y8/3B	
extra-long	HSK-A 63	6	160	17	30	36,2	134	34	174,70	**40657**	148,00	**40657**
	HSK-A 63	8	160	20	32	38,2	134	34	174,70	**40857**	148,00	**40857**
	HSK-A 63	10	160	25	35	41,2	134	39	174,70	**41057**	148,00	**41057**
	HSK-A 63	12	160	30	42	48,2	134	44	174,70	**41257**	148,00	**41257**
	HSK-A 63	14	160	32	45	50,5	134	44	174,70	**41457**	148,00	**41457**
	HSK-A 63	16	160	36	48	50,1	134	47	174,70	**41657**	148,00	**41657**
	HSK-A 63	18	160	38	48	50,1	134	47	174,70	**41857**	148,00	**41857**
	HSK-A 63	20	160	40	52		134	49	174,70	**42057**	148,00	**42057**
	HSK-A 63	25	160	45	63		134	54	174,70	**42557**[1)]	148,00	**42557**[1)]
	HSK-A 100	6	160	17	30	38,2	131	34	230,10	**40655**	214,40	**40655**
	HSK-A 100	8	160	20	32	40,2	131	34	230,10	**40855**	214,40	**40855**
	HSK-A 100	10	160	25	35	43,2	131	39	230,10	**41055**	214,40	**41055**
	HSK-A 100	12	160	30	42	50,2	131	44	230,10	**41255**	214,40	**41255**
	HSK-A 100	14	160	32	45	53,2	131	44	230,10	**41455**	214,40	**41455**
	HSK-A 100	16	160	36	48	56,2	131	47	230,10	**41655**	214,40	**41655**
	HSK-A 100	18	160	38	48	56,2	131	47	230,10	**41855**	214,40	**41855**
	HSK-A 100	20	160	40	52	60,2	131	49	230,10	**42055**	214,40	**42055**
	HSK-A 100	25	160	45	65	73,2	131	54	230,10	**42555**[1)]	214,40	**42555**[1)]
	HSK-A 100	32	160	52	72	79,5	134	58	230,10	**43255**[1)]	214,40	**43255**[1)]

1) Version with two grubscrews

The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

Accessories

Coolant transfer pipe	Others
→ 156	→ 284

Tool holder for tools with angled clamping flat (Whistle Notch)

▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
▲ also available with Balluff chip **on request**

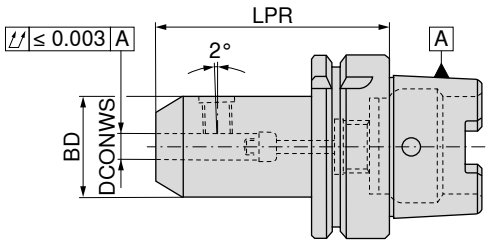

NEW

G 2,5 n_{max} 25000

82 742 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8/3B	
short	HSK-A 63	6	80	25	108,60	**10657**
	HSK-A 63	8	80	28	108,60	**10857**
	HSK-A 63	10	80	35	108,60	**11057**
	HSK-A 63	12	90	42	108,60	**11257**
	HSK-A 63	14	90	44	108,60	**11457**
	HSK-A 63	16	100	48	108,60	**11657**
	HSK-A 63	18	100	50	108,60	**11857**
	HSK-A 63	20	100	52	108,60	**12057**
	HSK-A 63	25	110	65	108,60	**12557**[1)]
	HSK-A 63	32	110	72	108,60	**13257**[1)]
	HSK-A 100	6	90	25	184,10	**10655**
	HSK-A 100	8	90	28	184,10	**10855**
	HSK-A 100	10	90	35	184,10	**11055**
	HSK-A 100	12	100	42	184,10	**11255**
	HSK-A 100	14	100	44	184,10	**11455**
	HSK-A 100	16	100	48	184,10	**11655**
	HSK-A 100	18	100	50	184,10	**11855**
	HSK-A 100	20	110	52	184,10	**12055**
	HSK-A 100	25	120	65	184,10	**12555**[1)]
	HSK-A 100	32	120	72	184,10	**13255**[1)]
	HSK-A 100	40	120	80	184,10	**14055**[1)]

1) Version with two grubscrews

Grubscrew

62 950 ...

Spare parts DCONWS		EUR W7	
6	M6x10	0,84	**006**
8	M8x10	0,99	**008**
10	M10x12	1,31	**010**
12 - 14	M12x16	1,32	**012**
16 - 18	M14x16	1,66	**016**
20	M16x16	2,01	**020**
25	M18x2x20	3,66	**025**
32 - 40	M20x2x20	4,04	**032**

Accessories

Coolant transfer pipe
→ 156

Others
→ 284

16

Indexable insert drill adapter ISO 12164 HSK Form A

▲ also available with Balluff chip **on request**

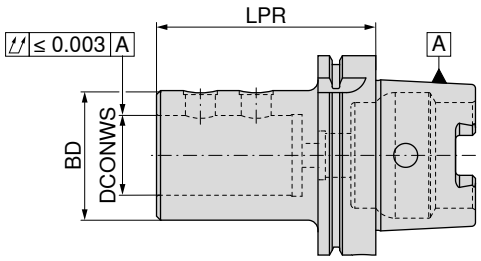

G 6,3 n_{max} 15000

10 842 ...

Adapter	DCONWS mm	LPR mm	BD mm	EUR 2E/45	
HSK-A 63	20	80	40	225,30	**320**
HSK-A 63	25	90	45	225,30	**325**
HSK-A 63	32	90	52	225,30	**332**
HSK-A 63	40	110	65	225,30	**340**
HSK-A 100	20	90	40	252,70	**420**
HSK-A 100	25	100	45	252,70	**425**
HSK-A 100	32	100	52	252,70	**432**
HSK-A 100	40	110	65	252,70	**440**
HSK-A 100	50	120	75	252,70	**450**

Suitable eccentric sleeves can be found in → **Chapter 3, Indexable insert drilling.**

Grubscrew

10 950 ...

Spare parts DCONWS		EUR 2A/28	
20	M10x1x10	4,96	**001**
25 - 32	M12x1x10	5,04	**002**
40 - 50	M16x1x12	5,04	**003**

Accessories

Coolant transfer pipe → 156

Others → 284

ER Precision Collet chuck – PCC

- ▲ For standard or sealing disc lock nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲ p_{max} = 100 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Base body with lock nut and backstop screw

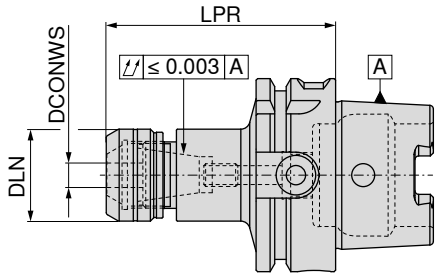

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	for collet	Torque moment / Clamping force Nm	82 700 ... EUR Y8	
HSK-A 63	1 - 10	75	30	426E (ER16)	40 / 2-70	151,10	**11057**
HSK-A 63	1 - 10	100	30	426E (ER16)	40 / 2-70	158,70	**21057**
HSK-A 63	2 - 16	75	40	430E (ER25)	80 / 10-160	151,10	**11657**
HSK-A 63	2 - 16	100	40	430E (ER25)	80 / 10-160	158,70	**21657**
HSK-A 63	2 - 20	75	50	470E (ER32)	125 / 15-250	151,10	**12057**
HSK-A 63	2 - 20	100	50	470E (ER32)	125 / 15-250	158,70	**22057**
HSK-A 100	2 - 16	100	40	430E (ER25)	80 / 10-160	262,90	**21655**
HSK-A 100	2 - 16	160	40	430E (ER25)	80 / 10-160	352,40	**41655**
HSK-A 100	2 - 20	100	50	470E (ER32)	125 / 15-250	262,90	**22055**
HSK-A 100	2 - 20	160	50	470E (ER32)	125 / 15-250	352,40	**42055**

Dimension LPR is 4.5 mm longer for ER16 and ER32 and 5.0 mm longer for ER25 when using thro' coolant lock nut

Lock nut IK

Lock nut

Backstop screw PCC 2

Backstop screw PCC 1

Spare parts for collet	82 950 ... EUR Y8		82 950 ... EUR Y8			82 950 ... EUR Y8			82 950 ... EUR Y8	
426E (ER16)	43,98	**11000**	41,44	**01000**				M8X3,0	4,15	**00100**
430E (ER25)	43,98	**11600**	41,44	**01600**	M18x1,5	5,64	**00200**	M8x8	4,15	**00300**
470E (ER32)	43,98	**12000**	41,44	**02000**	M18x1,5	5,64	**00200**	M8x8	4,15	**00300**

Accessories

ER collet
→ 268–276, 278–279

Sealing ring
→ 281

Roll key
→ 286

16

ER Collet chuck

▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder including nut

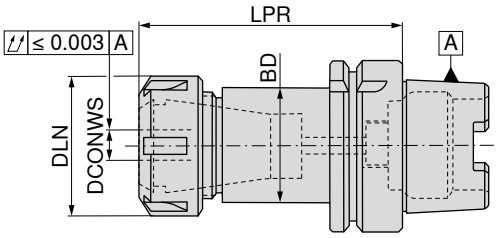

NEW

G 2,5 n_{max} 25000

82 743 ...

	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	EUR Y8/3B	
medium length	HSK-A 63	1 - 10	100	22	8 - 56	426E (ER16 mini)	140,00	**21157**
	HSK-A 63	1 - 10	100	32	8 - 56	426E (ER16)	115,90	**21057**
	HSK-A 63	1 - 16	100	42	24 - 104	430E (ER25)	115,90	**21657**
	HSK-A 63	2 - 20	100	50	24 - 136	470E (ER32)	115,90	**22057**
	HSK-A 63	3 - 26	100	63	176	472E (ER40)	115,90	**22657**
long	HSK-A 100	1 - 10	100	32	8 - 56	426E (ER16)	197,20	**21055**
	HSK-A 100	1 - 16	100	42	24 - 104	430E (ER25)	180,90	**21655**
	HSK-A 100	2 - 20	100	50	24 - 136	470E (ER32)	197,20	**22055**
	HSK-A 100	3 - 26	100	63	176	472E (ER40)	197,20	**22655**
extra-long	HSK-A 63	1 - 10	160	22	8 - 56	426E (ER16 mini)	140,00	**41157**
	HSK-A 63	1 - 10	160	32	8 - 56	426E (ER16)	163,00	**41057**
	HSK-A 63	1 - 16	160	42	24 - 104	430E (ER25)	163,00	**41657**
	HSK-A 63	2 - 20	160	50	24 - 136	470E (ER32)	163,00	**42057**
	HSK-A 63	3 - 26	160	63	176	472E (ER40)	163,00	**42657**
	HSK-A 100	1 - 10	160	32	8 - 56	426E (ER16)	256,00	**41055**
	HSK-A 100	1 - 16	160	42	24 - 104	430E (ER25)	233,50	**41655**
	HSK-A 100	2 - 20	160	50	24 - 136	470E (ER32)	246,70	**42055**
	HSK-A 100	3 - 26	160	63	176	472E (ER40)	256,00	**42655**
extra long	HSK-A 100	1 - 10	200	32	8 - 56	426E (ER16)	327,30	**51055**
	HSK-A 100	1 - 16	200	42	24 - 104	430E (ER25)	327,30	**51655**
	HSK-A 100	2 - 20	200	50	24 - 136	470E (ER32)	327,30	**52055**
	HSK-A 100	3 - 26	200	63	176	472E (ER40)	327,30	**52655**

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

Spare parts ER collet chucks

	Lock nut IK		Lock nut		Y clamping key		ER Mini clamping key		Mini lock nut		Mini IK		Stop screw IK	
	83 950 ...		**62 950 ...**		**83 357 ...**		**83 950 ...**		**62 950 ...**		**83 950 ...**		**82 950 ...**	
Spare parts for collet	**EUR** Y8		**EUR** W7		**EUR** Y8		**EUR** Y8		**EUR** W7		**EUR** Y8		**EUR** Y8/3B	
426E (ER16 mini)							20,81	**101**	30,82	**066**	46,98	**058**	2,72	**30000**
426E (ER16)	39,48	**054**	22,96	**054**	20,69	**116**								
430E (ER25)	51,29	**055**	25,68	**055**	22,85	**125**								
470E (ER32)	54,43	**056**	23,93	**65600**	31,09	**132**								
472E (ER40)	64,23	**057**	23,26	**65700**	34,22	**140**								

Accessories

ER collet	Coolant transfer pipe	Others
→ 268–276, 279	→ 156	→ 284

Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

Scope of supply:

Toolholder including clamping key SW4

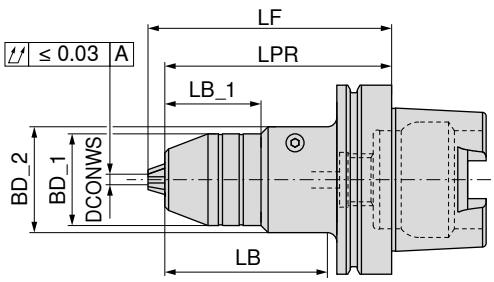

G 6,3 n_{max} 10000

84 716 ...

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LPR mm	LF mm	EUR Y8	
HSK-A 63	0,5 - 13	48,5	56	50,9		126,0	116,9	369,10	**613**
HSK-A 63	2,5 - 16	51,0	56	50,9		127,5	116,9	375,90	**616**
HSK-A 100	0,5 - 13	48,5	56	50,9	86	129,0	120,0	451,60	**113**
HSK-A 100	2,5 - 16	51,0	56	50,9	86	130,5	120,0	471,80	**116**

Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

Accessories

Others

→ 284

Synchro tapping chuck with minimum length compensation

- For collets according to DIN 6499
- With length compensation under tension and under compression (LZD)
- $p_{max.}$ = 50 bar
- also available with Balluff chip **on request**

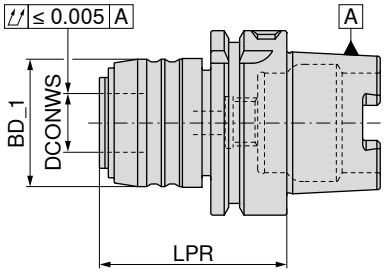

Adapter	cutting range	SZID	DCONWS mm	LPR mm	BD_1 mm	LZD± mm	83 724 ... EUR Y8	
HSK-A 63	M3 - M12	1	20	64	43	1,0 / 0,2	261,00	**612**
HSK-A 63	M6 - M20	2	32	97	60	1,0 / 0,2	327,20	**620**
HSK-A 100	M3 - M12	1	20	70	43	1,0 / 0,2	416,40	**112**
HSK-A 100	M6 - M20	2	32	91	60	1,0 / 0,2	488,20	**120**

Accessories

Coolant transfer pipe
→ 156

Others
→ 284

Insert for synchro quick change tapping chuck with minimum length compensation

- SZID = for insert size

Scope of supply:
Includes lock nut

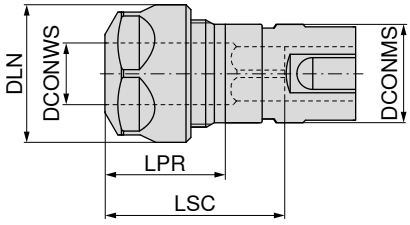



SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	83 608 ... EUR Y8	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	142,00	**012** [1]
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	164,90	**020**

1) with 6 position lock nut

16

Spare parts for synchronous tapping chucks

		Lock nut		Lock nut IK		Lock nut		Y clamping key	
		62 950 ...		**83 950 ...**		**62 950 ...**		**83 357 ...**	
Spare parts for Article no.		**EUR** W7		**EUR** Y8		**EUR** W7		**EUR** Y8	
83 608 012	M22x1,5 - SW25	22,96	**044**	M22x1,5	39,48	**054**	M22x1,5	22,96	**054**	20,69	**116**
83 608 020				M32x1,5	51,29	**055**	M32x1,5	25,68	**055**	22,85	**125**

Quick change tap chuck with length compensation

▲ With length compensation under tension and compression (LZD)
▲ also available with Balluff chip **on request**

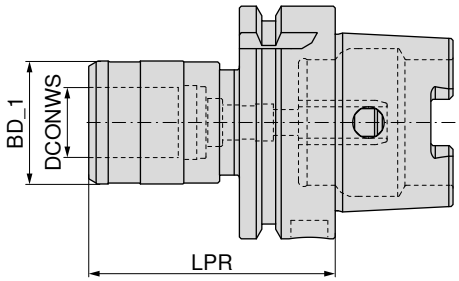

Adapter	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	**83 712 ...** **EUR** Y8	
HSK-A 63	01	72	41	19	7,5	515,10	**612**
HSK-A 63	02	110	60	31	10	597,60	**620**
HSK-A 100	01	80	41	19	7,5	868,00	**112**
HSK-A 100	02	100	60	31	10	868,00	**120**

Accessories

Collet
→ 288, 290–292

Coolant transfer pipe
→ 156

Others
→ 284

Adapter with ABS Connection

▲ also available with Balluff chip **on request**

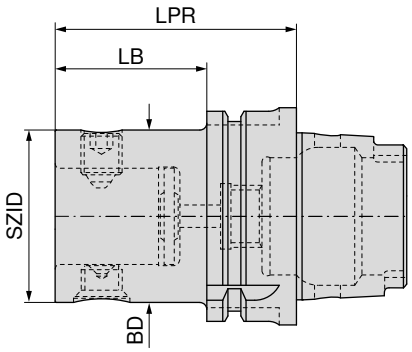

G 6,3 n_{max} 10000

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	84 200 ... EUR 3E	
HSK-A 63	A06 30120	ABS 25	25	50	24	323,80	**06390**
HSK-A 63	A06 30130	ABS 32	32	50	24	323,80	**06389**
HSK-A 63	A06 30140	ABS 40	40	60	34	323,80	**06388**
HSK-A 63	A06 30150	ABS 50	50	70	44	323,80	**06397**
HSK-A 63	A06 30160	ABS 63	63	80	54	323,80	**06396**
HSK-A 63	A06 30170	ABS 80	80	100	74	323,80	**06392**
HSK-A 100	A06 50120	ABS 25	25	60	31	356,80	**10090**
HSK-A 100	A06 50130	ABS 32	32	60	31	356,80	**10089**
HSK-A 100	A06 50140	ABS 40	40	80	51	356,80	**10088**
HSK-A 100	A06 50150	ABS 50	50	80	51	356,80	**10097**
HSK-A 100	A06 50160	ABS 63	63	80	51	356,80	**10096**
HSK-A 100	A06 50170	ABS 80	80	90	61	356,80	**10092**
HSK-A 100	A06 50180	ABS 100	100	100	71	356,80	**10091**

Eccentric adjuster with ABS Connection

▲ Adjustment ± 0.25 mm on diameter

▲ also available with Balluff chip **on request**

Scope of supply:

Eccentric adjuster with adjuster key Ø 2.8 mm

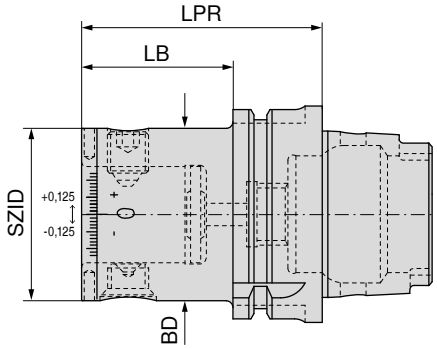

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	84 203 ... EUR W4/6A	
HSK-A 63	A06 36730	ABS 50	50	70,0	39,5	650,20	**06397**
HSK-A 100	A06 56730	ABS 50	50	75,5	46,5	681,80	**10097**
HSK-A 100	A06 56740	ABS 63	63	80,0	51,0	681,80	**10096**

16

Torsional vibration dampers with ABS Connection

▲ also available with Balluff chip **on request**

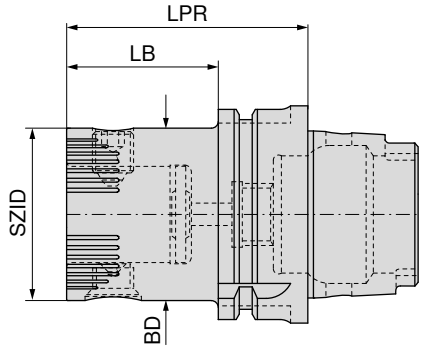



Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	84 206 ... EUR 3E	
HSK-A 63	A06 30251	ABS 50	50	70	44	860,40	**06397**
HSK-A 63	A06 30261	ABS 63	63	80	54	896,40	**06396**
HSK-A 63	A06 30270	ABS 80	80	100	74	1.262,00	**06392**
HSK-A 100	A06 50251	ABS 50	50	80	51	938,40	**10097**
HSK-A 100	A06 50261	ABS 63	63	80	51	1.034,00	**10096**
HSK-A 100	A06 50270	ABS 80	80	90	61	1.190,00	**10092**

Clamping screw

Taper screw

Spare parts SZID	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**

Accessories

Coolant transfer pipe
→ 156

Extension
→ 187

Others
→ 284

Adapter for milling cutters with threaded end

▲ also available with Balluff chip **on request**

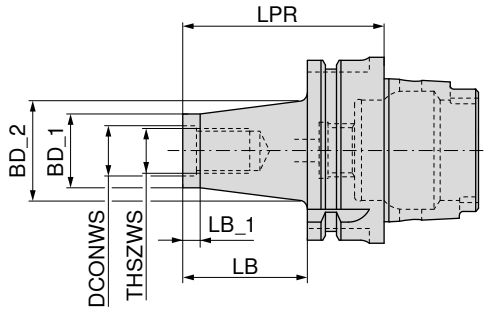

G 2,5 n_{max} 30000

56 714 ...

Adapter	THSZWS	DCONWS mm	LB mm	BD_1 mm	BD_2 mm	LB_1 mm	LPR mm	EUR WA	
HSK-A 63	M8	8,5	25	13,8	15	12	51	217,80	**081**
HSK-A 63	M8	8,5	50	13,8	23	12	76	233,80	**082**
HSK-A 63	M8	8,5	75	13,8	25	12	101	250,10	**083**
HSK-A 63	M8	8,5	100	13,8	30	12	126	269,10	**084**
HSK-A 63	M10	10,5	25	18,0	23	12	51	217,80	**101**
HSK-A 63	M10	10,5	50	18,0	25	12	76	233,80	**102**
HSK-A 63	M10	10,5	75	18,0	30	12	101	250,10	**103**
HSK-A 63	M10	10,5	100	18,0	35	12	126	269,10	**104**
HSK-A 63	M12	12,5	25	21,0	24	12	51	217,80	**121**
HSK-A 63	M12	12,5	50	21,0	30	12	76	233,80	**122**
HSK-A 63	M12	12,5	75	21,0	35	12	101	250,10	**123**
HSK-A 63	M12	12,5	100	21,0	38	12	126	269,10	**124**
HSK-A 63	M12	12,5	125	21,0	43	12	151	288,00	**125**
HSK-A 63	M12	12,5	150	21,0	45	12	176	302,90	**126**
HSK-A 63	M16	17,0	25	29,0	29	12	51	217,80	**161**
HSK-A 63	M16	17,0	50	29,0	34	12	76	233,80	**162**
HSK-A 63	M16	17,0	75	29,0	35	12	101	250,10	**163**
HSK-A 63	M16	17,0	100	29,0	40	12	126	269,10	**164**
HSK-A 63	M16	17,0	125	29,0	44	12	151	288,00	**165**
HSK-A 63	M16	17,0	150	29,0	48	12	176	302,90	**166**

Accessories

Extension-Reduction set	Coolant transfer pipe	Others
→ 257	→ 156	→ 284

16

Adapter for milling cutters with threaded end

▲ also available with Balluff chip **on request**

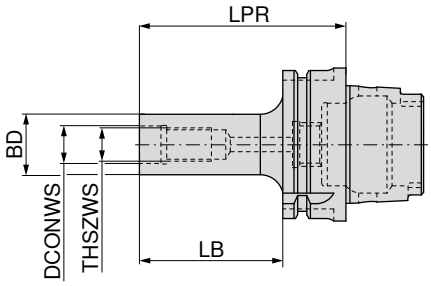

G 2,5 n_{max} 25000

56 719 ...

Adapter	THSZWS	DCONWS mm	BD mm	LB mm	LPR mm	EUR WA	
HSK-A 63	M8	8,5	13,8	50	76	233,80	**082**
HSK-A 63	M10	10,5	18,0	50	76	233,80	**102**
HSK-A 63	M10	10,5	18,0	100	126	269,10	**104**
HSK-A 63	M12	12,5	21,0	50	76	233,80	**122**
HSK-A 63	M12	12,5	21,0	100	126	269,10	**124**
HSK-A 63	M16	17,0	29,0	50	76	233,80	**162**
HSK-A 63	M16	17,0	29,0	100	126	269,10	**164**

Accessories

Extension-Reduction set
→ 257

Coolant transfer pipe
→ 156

Others
→ 284

Combination shell mill adapter

▲ For milling cutters with transverse or longitudinal groove according to DIN 6358
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder with clamping screw, driving ring and dowel spring

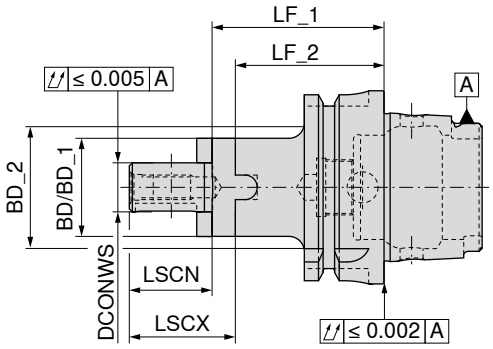

NEW

G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LF_1 mm	LF_2 mm	BD mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	BHTA	82 744 ... EUR Y8/3B	
short	HSK-A 63	16	60	50	32			27	17		109,00	**11657**
	HSK-A 63	22	60	48	40			31	19		109,00	**12257**
	HSK-A 63	27	60	48	48			33	21		109,00	**12757**
	HSK-A 63	32	60	46	58			38	24		109,00	**13257**
	HSK-A 63	40	70	56	70			41	27		109,00	**14057**
	HSK-A 100	16	60	50	32			27	17		202,00	**11655**
	HSK-A 100	22	60	48	40			31	19		202,00	**12255**
	HSK-A 100	27	60	48	48			33	21		202,00	**12755**
	HSK-A 100	32	60	46	58			38	24		202,00	**13255**
	HSK-A 100	40	70	56	70			41	27		202,00	**14055**
medium length	HSK-A 63	16	100	90	32			27	17		121,30	**21657**
	HSK-A 63	22	100	88	40			31	19		121,30	**22257**
	HSK-A 63	27	100	88	48			33	21		121,30	**22757**
	HSK-A 63	32	100	86	58			38	24		121,30	**23257**
	HSK-A 63	40	100	86	70			41	27		121,30	**24057**
extra-long	HSK-A 63	16	160	150		32	43,21	27	17	4,5°	139,10	**41657**
	HSK-A 63	22	160	148		40	47,25	31	19	3,0°	139,10	**42257**
	HSK-A 63	27	160	148	48			33	21		139,10	**42757**
	HSK-A 63	32	160	146	58			38	24		139,10	**43257**
	HSK-A 63	40	160	146	70			41	27		139,10	**44057**

Parallel key

Drive ring

clamping screw

Spare parts

DCONWS		83 950 ... EUR Y8/3B		83 370 ... EUR Y8			83 950 ... EUR Y8/3B	
16	4 x 4 x 20	2,11	**284**	12,79	**116**	M8x25	3,72	**113**
22	6 x 6 x 25	2,11	**285**	14,21	**122**	M10x25	4,28	**124**
27	7 x 7 x 25	4,04	**286**	15,28	**127**	M12x30	4,73	**125**
32	8 x 7 x 28	2,43	**287**	18,25	**132**	M16x35	5,88	**126**
40	10 x 8 x 32	2,57	**288**	27,16	**140**	M20x40 - SW17	8,35	**112**

Accessories

Milling Adapter Rings
→ 263

Coolant transfer pipe
→ 156

Others
→ 284

16

Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

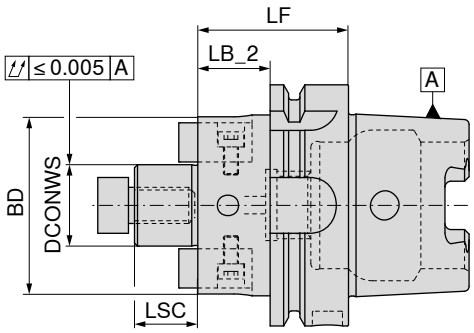



NEW

G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm		82 315 ... EUR Y8/3B	
short	HSK-A 63	22	34	60	38	19		242,60	**12257**
	HSK-A 63	27	34	60	48	21		242,60	**12757**
	HSK-A 100	22	31	60	38	19		245,80	**12255**
	HSK-A 100	27	31	60	48	21		245,80	**12755**

These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters.
Now they can be clamped perfectly, thanks to the adapted flange diameters.

Screw for drivers

Driver

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B	
22	M4x8	0,75	**51700**	10x7x20,5	10,58	**51500**	M10x25	4,28	**124**
27	M5x8	0,92	**51800**	12x9x24,3	12,06	**51600**	M12x30	4,73	**125**

Shell mill adapter

▲ for face mills with transverse groove ISO 3937
▲ also available with Balluff chip **on request**

Scope of supply:
Toolholder with retaining screw and drive dogs

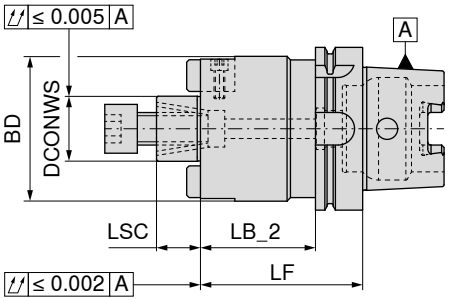

NEW

G 2,5 n_{max} 25000

82 745 ...

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	BD_1 mm	BD_2 mm	LSC mm	EUR Y8/3B	
short	HSK-A 63	16	34	60	38			17	154,30	**11657**
	HSK-A 63	22	34	60	48			19	154,30	**12257**
	HSK-A 63	27	34	60	58			21	135,10	**12757**
	HSK-A 63	32	34	60	78			24	140,70	**13257**
	HSK-A 63	40	34	70	88			27	154,30	**14057**[1)]
	HSK-A 100	16	31	60	38			17	217,20	**11655**
	HSK-A 100	22	31	60	48			19	217,20	**12255**
	HSK-A 100	27	31	60	58			21	217,20	**12755**
	HSK-A 100	32	31	60	78			24	217,20	**13255**
	HSK-A 100	40	41	70	88			27	217,20	**14055**[1)]
medium length	HSK-A 63	16	74	100		38	44,3	17	167,00	**21657**
	HSK-A 63	22	74	100		48	50,3	19	167,00	**22257**
	HSK-A 63	27	74	100	58			21	167,00	**22757**
	HSK-A 63	32	74	100	78			24	167,00	**23257**
	HSK-A 63	40	74	100	88			27	167,00	**24057**[1)]
	HSK-A 100	16	71	100		38	46,3	17	229,80	**21655**
	HSK-A 100	22	71	100		48	56,3	19	229,80	**22255**
	HSK-A 100	27	71	100		58	66,3	21	229,80	**22755**
	HSK-A 100	32	71	100		78	80,3	24	229,80	**23255**
	HSK-A 100	40	71	100	88			27	229,80	**24055**[1)]
long	HSK-A 63	16	104	130		38	44,3	17	180,60	**31657**
	HSK-A 63	22	104	130		48	50,3	19	180,60	**32257**
	HSK-A 63	27	104	130	58			21	180,60	**32757**
	HSK-A 63	32	104	130	78			24	180,60	**33257**
	HSK-A 63	40	104	130	88			27	180,60	**34057**[1)]
	HSK-A 100	16	101	130		38	46,3	17	278,70	**31655**
	HSK-A 100	22	101	130		48	56,3	19	278,70	**32255**
	HSK-A 100	27	101	130		58	66,3	21	278,70	**32755**
	HSK-A 100	32	101	130		78	80,3	24	278,70	**33255**
	HSK-A 100	40	101	130	88			27	278,70	**34055**[1)]
extra-long	HSK-A 63	16	134	160		38	44,3	17	194,70	**41657**
	HSK-A 63	22	134	160		48	50,3	19	194,70	**42257**
	HSK-A 63	27	134	160	58			21	194,70	**42757**
	HSK-A 63	32	134	160	78			24	194,70	**43257**
	HSK-A 63	40	134	160	88			27	194,70	**44057**[1)]
	HSK-A 100	16	131	160		38	46,3	17	304,20	**41655**
	HSK-A 100	22	131	160		48	56,3	19	304,20	**42255**
	HSK-A 100	27	131	160		58	66,3	21	304,20	**42755**
	HSK-A 100	32	131	160		78	80,3	24	304,20	**43255**
	HSK-A 100	40	131	160	88			27	304,20	**44055**[1)]

1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!

Spare parts facemill adapters

Cross nut key

83 368 ...

Spare parts DCONWS	EUR Y8	
16	13,79	**116**
22	17,18	**122**
27	22,03	**127**
32	28,38	**132**
40	39,63	**140**

Cross screw

83 367 ...

	EUR Y8	
M8	4,17	**016**
M10	4,58	**022**
M12	5,85	**027**
M16	9,39	**032**
M20	14,89	**040**

clamping screw

83 950 ...

	EUR Y8/3B	
M8x25	3,72	**113**
M10x25	4,28	**124**
M12x30	4,73	**125**
M16x35	5,88	**126**
M20x40 - SW17	8,35	**112**

Screw for drivers

83 950 ...

	EUR Y8/3B	
M3x8	0,48	**296**
M4x12	0,61	**297**
M5x12	0,74	**136**
M5x20	0,82	**137**
M6x16	0,97	**138**

Driver

83 950 ...

	EUR Y8/3B	
8x9x17,5	9,32	**120**
10x11x20,5	9,65	**121**
12x13x24,3	10,93	**122**
14x21x21,2	11,28	**123**
15,9x16,3x19,5	14,47	**295**

Milling sleeve adapter for Morse taper shanks to DIN 228-2 D

▲ also available with Balluff chip **on request**

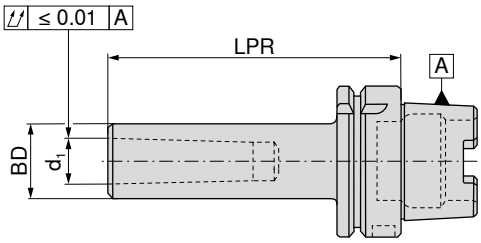

NEW

G 6,3 n_{max} 8000

82 746 ...

Adapter	d_1	LPR mm	BD mm	EUR Y8/3B	
HSK-A 63	MK1	100	25	104,20	**01057**
HSK-A 63	MK2	120	32	104,20	**02057**
HSK-A 63	MK3	140	40	104,20	**03057**
HSK-A 63	MK4	160	48	104,20	**04057**
HSK-A 100	MK2	120	32	169,60	**02055**
HSK-A 100	MK3	150	40	169,60	**03055**
HSK-A 100	MK4	170	48	169,60	**04055**

Accessories

Morse taper adapter sleeve
→ 242

Coolant transfer pipe
→ 156

Others
→ 284

HSK-T extension

▲ for mounting HSK-T adapters according to ISO 12164-3
▲ also suitable for HSK-A and HSK-C
▲ also available with Balluff chip **on request**

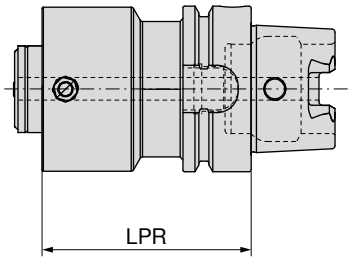

Adapter	LPR mm	84 621 ... EUR Y8	
HSK-T 63	80	662,00	**08037**
HSK-T 63	120	706,10	**12037**
HSK-T 100	125	882,70	**12535**
HSK-T 100	160	937,90	**16035**
HSK-T 100	200	1.004,00	**20035**

HSK-A reduction

▲ for mounting HSK-A adapters according to ISO 12164
▲ also available with Balluff chip **on request**

Scope of supply:
with clamping cartridge and cover ring

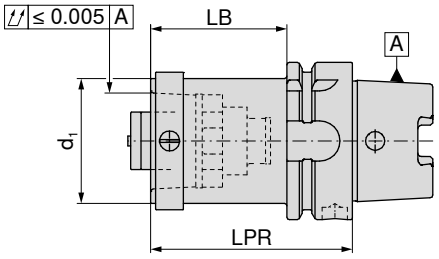

Adapter	d_1	LB mm	LPR mm	84 040 ... EUR Y8	
HSK-A 63	HSK-A 40	54	80	639,40	**06359**
HSK-A 63	HSK-A 50	54	80	651,40	**06358**
HSK-A 100	HSK-A 50	51	80	758,20	**10058**
HSK-A 100	HSK-A 63	71	100	758,20	**10057**

HSK-A/PSC adapter

▲ for mounting PSC adapters according to ISO 26623-1
▲ also available with Balluff chip **on request**

Scope of supply:
with tightening screw

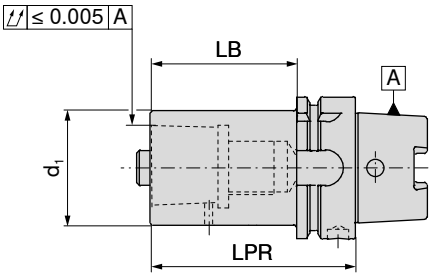

Adapter	d_1	LB mm	LPR mm	84 013 ... EUR Y8	
HSK-A 63	PSC 32	49	75	330,50	**06387**
HSK-A 63	PSC 40	54	80	354,20	**06395**
HSK-A 63	PSC 50	64	90	354,20	**06394**
HSK-A 100	PSC 32	51	80	389,80	**10087**
HSK-A 100	PSC 40	61	90	401,70	**10095**
HSK-A 100	PSC 50	71	100	413,40	**10094**
HSK-A 100	PSC 63	81	110	473,00	**10093**
HSK-A 100	PSC 80	91	120	508,70	**10086**

Threaded ring

tightening screw

Spare parts d_1	84 950 ... EUR Y8			84 950 ... EUR Y8	
PSC 32	33,13	**127**	SW8	23,93	**122**
PSC 40	33,13	**128**	SW8	27,05	**123**
PSC 50	33,13	**129**	SW10	27,05	**124**
PSC 63	66,12	**130**	SW14	30,28	**126**
PSC 80	66,12	**130**	SW14	30,28	**126**

Blank

- ▲ Material: 16MnCr5
- ▲ for production of special tools
- ▲ Taper hardened and ground
- ▲ Tool 27$^{\pm 1}$ HRC
- ▲ also available with Balluff chip **on request**

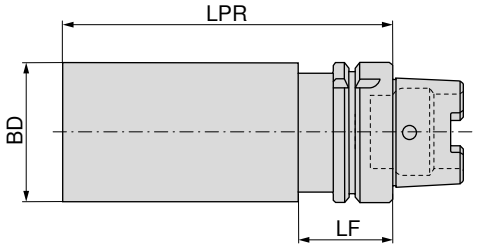

NEW

Adapter	BD mm	LPR mm	LF mm	82 747 ... EUR Y8/3B	
HSK-A 63	63,0	200	42	115,10	**16357**
HSK-A 63	80,0	250	42	129,60	**18057**
HSK-A 100	63,0	200		173,00	**16355**
HSK-A 100	80,0	250		202,00	**18055**
HSK-A 100	97,5	250	45	249,00	**19755**

Test arbor

Scope of supply:
in wooden box

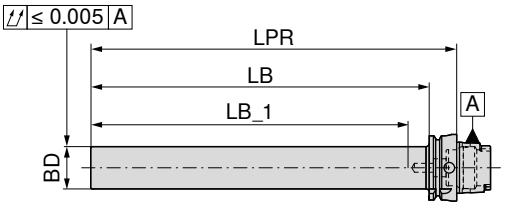

Adapter	BD mm	LPR mm	LB_1 mm	LB mm	81 746 ... EUR Y8/3B	
HSK-A 63	40	346	300	320	409,10	**063**
HSK-A 100	40	349	300	320	522,70	**100**

ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p_{max} = 80 bar

Scope of supply:
Holder **without** nut, **without** backstop

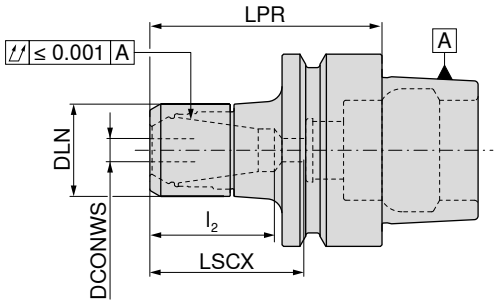

G 2,5 n_{max} 30000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 mm	for collet	84 776 ... EUR Y8	
HSK-E 40	2 - 16	60	40	39		430E (ER25)	181,40	**417**
HSK-E 50	2 - 16	70	40	49	30 - 39	430E (ER25)	201,00	**516**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1
Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Lock nut IK 84 950 ... EUR Y8		Lock nut 84 950 ... EUR Y8	
430E (ER25)	49,29	**013**	40,16	**003**

Accessories

ER collet
→ 268–276, 279


Sealing ring
→ 280

Roll key
→ 286

Roll key device
→ 286

Coolant transfer pipe
→ 156

Others
→ 284

ER Precision tapered collet chuck – Centro-P

▲ for Mini Clamping Nuts
▲ Maximum clamping range covered according to ISO tolerance field H10
▲ Roll key required for clamping
▲ p_{max} = 80 bar

Scope of supply:
Holder **without** nut, **without** backstop

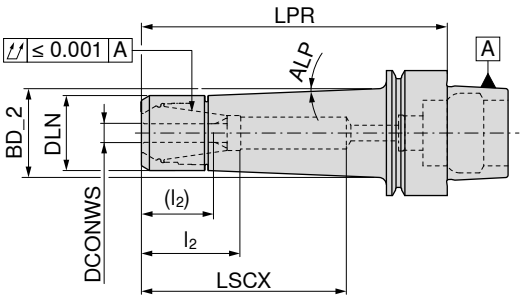

G 2,5 n_{max} 30000

	Adapter	DCONWS mm	LPR mm	DLN mm	BD_2 mm	LSCX mm	l_2 (l_2) mm	ALP	for collet	84 774 ... EUR Y8	
short	HSK-E 25	1 - 7	35	16		22			4008E (ER11 mini)	206,30	07200
	HSK-E 32	1 - 7	50	16	17,5	31	18 - 20	4,5°	4008E (ER11 mini)	195,80	307
	HSK-E 40	1 - 7	50	16	17,5	31	18 - 20	4,5°	4008E (ER11 mini)	167,20	407
	HSK-E 25	1 - 10	45	22		30			426E (ER16 mini)	190,50	101
	HSK-E 32	1 - 10	55	22	25,8	40	28 - 32 (12 - 22)	4,5°	426E (ER16 mini)	185,30	310
	HSK-E 40	1 - 10	55	22	25,8	38	28 - 30 (12 - 20)	4,5°	426E (ER16 mini)	144,00	410
	HSK-E 50	1 - 10	60	22	25,4	39	28 - 31 (12 - 21)	4,5°	426E (ER16 mini)	159,40	510
medium length	HSK-E 40	1 - 7	100	16	25,4	64	18 - 36 (12 - 26)	4,5°	4008E (ER11 mini)	188,00	408
	HSK-E 40	1 - 10	100	22	29,0	66	28 - 48 (12 - 38)	2,5°	426E (ER16 mini)	172,40	411
	HSK-E 50	1 - 10	100	22	28,2	72	28 - 48 (12 - 38)	2,5°	426E (ER16 mini)	180,10	511

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK 84 950 ... EUR Y8		Mini lock nut 84 950 ... EUR Y8		Stop screw 2 83 950 ... EUR Y8		Stop screw 1 83 950 ... EUR Y8	
4008E (ER11 mini)			42,72	041	17,45	340	12,81	336
426E (ER16 mini)	53,15	035	42,72	034	18,15	341	12,81	337

Accessories

ER collet → 268–276, 279


Sealing ring → 280

Device → 285

Roll key → 286

Roll key device → 286

Coolant transfer pipe → 156

Others → 284

Shrink fit adapters

▲ for solid carbide and HSS shanks to h6 tolerance or better

TG

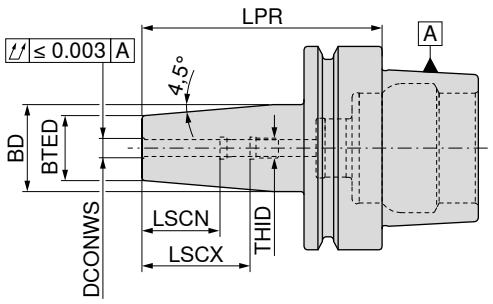

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	G 2,5 n_{max} 25000 **84 308 ...** EUR Y8		G 2,5 n_{max} 25000 **84 309 ...** EUR Y8	
short	HSK-E 40	3	60	10	15	28	12	M6	197,40	103		
	HSK-E 40	4	60	10	15	28	16	M6	192,00	104		
	HSK-E 40	5	60	10	15	30	20	M6	192,00	105		
	HSK-E 40	6	80	21	27	36	26	M5	162,40	106		
	HSK-E 40	8	80	21	27	36	26	M6	162,40	108		
	HSK-E 40	10	80	24	32	41	31	M8x1	162,40	110		
	HSK-E 40	12	90	24	32	47	37	M10x1	162,40	112		
	HSK-E 40	14	90	27	34	47	37	M10x1	162,40	114		
	HSK-E 40	16	90	27	34	50	40	M12x1	162,40	116		
	HSK-E 50	3	80	10	15	22	12	M6			198,70	103
	HSK-E 50	4	80	15	22	26	16	M6			194,70	104
	HSK-E 50	5	80	15	22	30	20	M6			194,70	105
	HSK-E 50	6	80	21	27	36	26	M5			183,90	106
	HSK-E 50	8	80	21	27	36	26	M6			183,90	108
	HSK-E 50	10	85	24	32	41	31	M8x1			183,90	110
	HSK-E 50	12	90	24	32	47	37	M10x1			183,90	112
	HSK-E 50	14	90	27	34	47	37	M10x1			183,90	114
	HSK-E 50	16	95	27	34	50	40	M12x1			183,90	116
	HSK-E 50	18	95	33	42	50	40	M12x1			183,90	118
	HSK-E 50	20	100	33	42	52	42	M16x1			183,90	120

→ Min. clamping depth, Page 312

Stop screw IK

Thro' coolant back stop screw

Stop screw IK

Spare parts DCONWS		83 950 ... EUR Y7			83 950 ... EUR Y7			83 950 ... EUR Y7	
3 - 5	M6x14 - SW2	10,45	417	M5x14 - SW2	5,04	411			
6							M5x12,5 - SW2,5	10,45	418
8							M6x12,5 - SW3	10,45	419
10							M8x1x13,5 - SW3	10,45	420
12 - 14							M10x1x13,5 - SW5	10,45	421
16 - 18							M12x1x13,5 - SW5	10,45	422
20							M16x1x13,5 - SW5	12,04	423

Spare part 83 950 411 only for HSK-E 32. Spare part 83 950 417 for HSK-E 40/HSK-E 50.

16

Coolant pipe – HSK

▲ use up to 100 bar

Scope of supply:
complete, including seals



Adapter	THOD	83 760 ... EUR Y8	
HSK 32	M10 x 1	9,96	032
HSK 40	M12 x 1	9,96	040
HSK 50	M16 x 1	9,96	050
HSK 63	M18 x 1	10,27	063
HSK 80	M20 x 1,5	11,84	080
HSK 100	M24 x 1,5	12,27	100

Key – HSK

Adapter	83 758 ... EUR Y8	
HSK 32	19,46	032
HSK 40	19,46	040
HSK 50	19,46	050
HSK 63	21,08	063
HSK 80	22,45	080
HSK 100	24,34	100

Coolant transfer pipe with strainer – HSK

▲ 75 µ filter screen, usable up to 80 bar

Scope of supply:
Complete, including sealing rings and filter screen



NEW

Adapter	THOD	83 760 ... EUR Y8	
HSK 63	M18 x 1	36,90	16300
HSK 100	M24 x 1,5	46,63	20000

For usage with micro tools with thro‘ coolant, improved tool life due to reduced contamination of the coolant hole

Coolant pipe for HSK tools

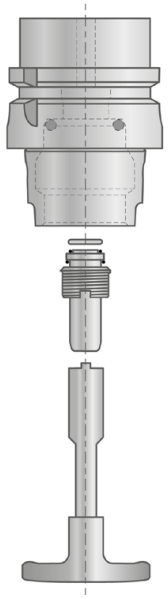

The coolant pipe is ideally mounted in vertical direction – from the bottom to the top. In this manner the sealing ring is prevented from being compressed during locating which would cause the loss of its sealing function. After mounting, the coolant pipe can be moved only to a minimum degree according to DIN (± 1°).

Flexibility



ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p_{max} = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** nut, **without** backstop

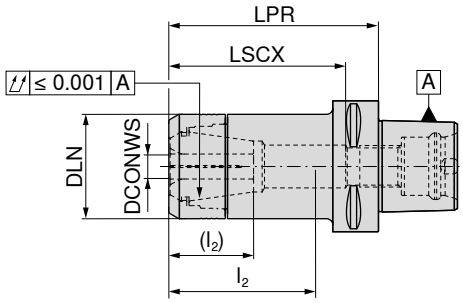

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	for collet	**84 112 ...** EUR Y8	
PSC 40	1 - 10	55	30	47	29 - 38	426E (ER16)	308,60	**402**
PSC 50	1 - 10	60	30	47	29 - 38	426E (ER16)	320,30	**501**
PSC 50	1 - 10	100	30	87	29 - 51 (29 - 37)	426E (ER16)	337,20	**502**
PSC 50	1 - 16	60	40	48		430E (ER25)	320,30	**505**
PSC 50	2 - 20	60	50	49		470E (ER32)	320,30	**507**
PSC 63	1 - 10	60	30	44		426E (ER16)	320,20	**601**
PSC 63	1 - 10	100	30	83	29 - 53 (25 - 39)	426E (ER16)	338,30	**602**
PSC 63	1 - 16	60	40	38		430E (ER25)	320,20	**605**
PSC 63	1 - 16	100	40	78	36 - 62 (30 - 45)	430E (ER25)	338,30	**606**
PSC 63	1 - 16	130	40	99	34 - 70 (30 - 50)	430E (ER25)	361,60	**607**
PSC 63	1 - 16	160	40	118	34 - 70 (30 - 50)	430E (ER25)	407,10	**608**
PSC 63	2 - 20	60	50	42		470E (ER32)	320,20	**609**
PSC 63	2 - 20	100	50	79	45 - 63 (25 - 45)	470E (ER32)	338,30	**610**
PSC 63	2 - 20	130	50	99	45 - 63 (25 - 53)	470E (ER32)	361,60	**611**
PSC 63	3 - 26	65	63	51		472E (ER40)	339,60	**612**

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks
l_2 = With back stop screw 1, Dimension in brackets (l_2) = With back stop screw 2
Dimension LPR when using tightening nuts with seals 4 mm longer

Lock nut IK

Lock nut

Stop screw 2

Stop screw 1

Spare parts for collet	**84 950 ...** EUR Y8		**84 950 ...** EUR Y8		**83 950 ...**	EUR Y8		**83 950 ...**	EUR Y8	
426E (ER16)	45,38	**011**	36,28	**001**	M11x1 - SW6	18,15	**341**	M11x1 - SW6	12,81	**337**
430E (ER25)	49,29	**013**	40,16	**003**	M18x1,5 - SW6	20,50	**432**	M18x1,5 - SW6	14,72	**431**
470E (ER32)	51,87	**015**	42,72	**005**	M22x1,5 - SW6	20,50	**402**	M22x1,5 - SW6	14,72	**401**
472E (ER40)	70,01	**017**	58,34	**007**				M28x1,5 - SW6	13,34	**400**

16

HyPower – Complus

▲ High pressure chuck, short and stable version
▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with backstop screw and pressure screw

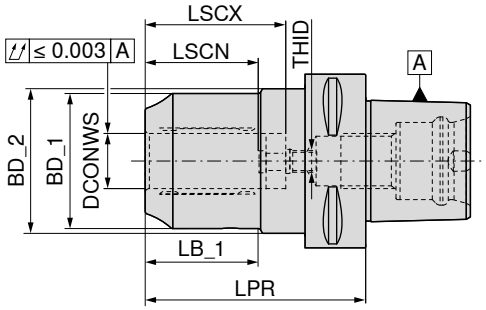

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	LB_1 mm	BD_1 mm	BD_2 mm	LSCX mm	LSCN mm	THID	84 108 ... EUR Y8	
PSC 63	20	80	41	49	52,5	51	41	M8x1	509,20	**62000**

→ Min. clamping depth, Page 312

	Cylindrical screw		Clamping key – T		Pressure screw		Stop screw IK	
	83 950 ... EUR Y7		80 397 ... EUR Y7		83 950 ... EUR Y7		83 950 ... EUR Y7	
Spare parts for Article no.								
84 108 62000	M5x5 - SW2,5	2,39 **157**	SW5	5,46 **050**	M10x1x14	5,51 **429**	M16x1x13,5 - SW8	12,04 **424**

Accessories

Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 176	→ 284

Shrink adapters

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** IK back stop screw

TG

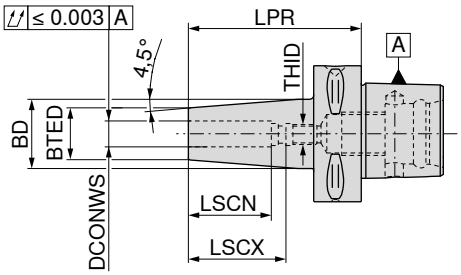

G 6,3 n_{max} 15000

84 104 ...

	Adapter	LPR mm	DCONWS mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	EUR Y8	
short	PSC 32	65	6	21	27	36	26	M5	210,90	**306**
	PSC 32	65	8	21	27	36	26	M6	210,90	**308**
	PSC 32	70	10	24	32	41	31	M8x1	210,90	**310**
	PSC 32	75	12	24	32	47	37	M10x1	210,90	**312**
	PSC 40	75	6	21	27	36	26	M5	214,90	**406**
	PSC 40	75	8	21	27	36	26	M6	214,90	**408**
	PSC 40	75	10	24	32	41	31	M8x1	214,90	**410**
	PSC 40	75	12	24	32	47	37	M10x1	214,90	**412**
	PSC 40	80	14	27	34	47	37	M10x1	214,90	**414**
	PSC 40	80	16	27	34	50	40	M12x1	214,90	**416**
	PSC 40	80	18	33	42	50	40	M12x1	214,90	**418**
	PSC 40	85	20	33	42	52	42	M16x1	214,90	**420**
	PSC 50	65	3	12	17				267,80	**503**
	PSC 50	65	4	12	17				267,80	**504**
	PSC 50	65	5	12	17				267,80	**505**
	PSC 50	75	6	21	30	36	26	M5	223,10	**506**
	PSC 50	75	8	21	30	36	26	M6	223,10	**508**
	PSC 50	75	10	24	33	41	31	M8x1	223,10	**510**
	PSC 50	75	12	24	33	47	37	M10x1	223,10	**512**
	PSC 50	80	14	27	34	47	37	M10x1	223,10	**514**
	PSC 50	80	16	27	34	50	40	M12x1	223,10	**516**
	PSC 50	80	18	33	42	50	40	M12x1	223,10	**518**
	PSC 50	85	20	33	42	52	42	M16x1	223,10	**520**
	PSC 50	90	25	44	53	58	48	M16x1	223,10	**525**
	PSC 63	80	3	12	17				328,50	**603**
	PSC 63	80	4	12	17				328,50	**604**
	PSC 63	80	5	12	17				328,50	**605**
	PSC 63	80	6	21	27	36	26	M5	277,30	**606**
	PSC 63	80	8	21	27	36	26	M6	277,30	**608**
	PSC 63	80	10	24	32	41	31	M8x1	277,30	**610**
	PSC 63	80	12	24	32	47	37	M10x1	277,30	**612**
	PSC 63	85	14	27	34	47	37	M10x1	277,30	**614**
	PSC 63	85	16	27	34	50	40	M12x1	277,30	**616**
	PSC 63	85	18	33	42	50	40	M12x1	277,30	**618**
	PSC 63	85	20	33	42	52	42	M16x1	277,30	**620**
	PSC 63	90	25	44	53	58	48	M16x1	277,30	**625**
	PSC 63	95	32	44	53	61	51	M16x1	277,30	**632**
	PSC 80	85	6	21	27	36	26	M5	297,40	**806**
	PSC 80	85	8	21	27	36	26	M6	297,40	**808**
	PSC 80	85	10	24	32	41	31	M8x1	297,40	**810**
	PSC 80	85	12	24	32	47	37	M10x1	297,40	**812**
	PSC 80	90	14	27	34	47	37	M10x1	297,40	**814**
	PSC 80	90	16	27	34	50	40	M12x1	297,40	**816**
	PSC 80	90	18	33	42	50	40	M12x1	297,40	**818**
	PSC 80	90	20	33	42	52	42	M16x1	297,40	**820**
	PSC 80	95	25	44	53	58	48	M16x1	297,40	**825**
	PSC 80	100	32	44	53	61	51	M16x1	297,40	**832**

→ Min. clamping depth, Page 312

Shrink adapters

▲ for solid carbide and HSS shanks with h6 tolerance or better
▲ also available with Balluff chip **on request**

Scope of supply:
Holder **without** IK back stop screw

TG

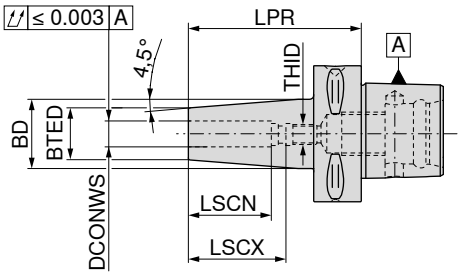

	Adapter	LPR mm	DCONWS mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	G 6,3 n_{max} 15000 **84 105 ...** EUR Y8		G 6,3 n_{max} 15000 **84 106 ...** EUR Y8	
medium length	PSC 50	120	6	21	32	36	26	M5	267,80	**506**		
	PSC 50	120	8	21	32	36	26	M6	267,80	**508**		
	PSC 50	120	10	24	34	41	31	M8x1	267,80	**510**		
	PSC 50	120	12	24	34	47	37	M10x1	267,80	**512**		
	PSC 50	120	14	27	36	47	37	M10x1	267,80	**514**		
	PSC 50	120	16	27	36	50	40	M12x1	267,80	**516**		
	PSC 50	120	18	33	42	50	40	M12x1	267,80	**518**		
	PSC 50	120	20	33	42	52	42	M16x1	267,80	**520**		
	PSC 50	120	25	44	53	58	48	M16x1	267,80	**525**		
	PSC 63	120	6	21	32	36	26	M5	328,50	**606**		
	PSC 63	120	8	21	32	36	26	M6	328,50	**608**		
	PSC 63	120	10	24	32	41	31	M8x1	328,50	**610**		
	PSC 63	120	12	24	32	47	37	M10x1	328,50	**612**		
	PSC 63	120	14	27	36	47	37	M10x1	328,50	**614**		
	PSC 63	120	16	27	36	50	40	M12x1	328,50	**616**		
	PSC 63	120	18	33	44	50	40	M12x1	328,50	**618**		
	PSC 63	120	20	33	44	52	42	M16x1	328,50	**620**		
	PSC 63	120	25	44	53	58	48	M16x1	328,50	**625**		
	PSC 63	120	32	44	53	61	51	M16x1	328,50	**632**		
	PSC 80	120	6	21	32	36	26	M5	355,60	**806**		
	PSC 80	120	8	21	32	36	26	M6	355,60	**808**		
	PSC 80	120	10	24	34	41	31	M8x1	355,60	**810**		
	PSC 80	120	12	24	34	47	37	M10x1	355,60	**812**		
	PSC 80	120	14	27	36	47	37	M10x1	355,60	**814**		
	PSC 80	120	16	27	36	50	40	M12x1	355,60	**816**		
	PSC 80	120	18	33	44	50	40	M12x1	355,60	**818**		
	PSC 80	120	20	33	44	52	42	M16x1	355,60	**820**		
	PSC 80	120	25	44	53	58	48	M16x1	355,60	**825**		
	PSC 80	120	32	44	53	61	51	M16x1	355,60	**832**		
extra-long	PSC 63	160	6	21	32	36	26	M5			359,80	**606**
	PSC 63	160	8	21	32	36	26	M6			359,80	**608**
	PSC 63	160	10	24	34	41	31	M8x1			359,80	**610**
	PSC 63	160	12	24	34	47	37	M10x1			359,80	**612**
	PSC 63	160	14	27	36	47	37	M10x1			359,80	**614**
	PSC 63	160	16	27	36	50	40	M12x1			359,80	**616**
	PSC 63	160	18	33	44	50	40	M12x1			359,80	**618**
	PSC 63	160	20	33	44	52	42	M16x1			359,80	**620**
	PSC 63	160	25	44	53	58	48	M16x1			359,80	**625**
	PSC 63	160	32	44	53	61	51	M16x1			359,80	**632**

→ Min. clamping depth, Page 312

Spare parts heat shrink adapter

Backstop screw IK

84 950 ...

Spare parts DCONWS	EUR Y8	
6	10,69	**140**
8	10,69	**141**
10	10,69	**142**
12 - 14	10,69	**143**
16 - 18	10,69	**144**
20 - 32	10,69	**145**

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

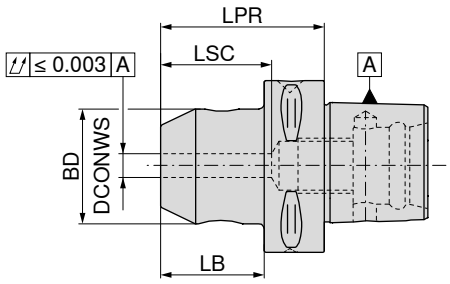

G 6,3 n_{max} 15000

84 100 ...

Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	EUR Y8	
PSC 32	6	45	25	30	35	174,50	**306**
PSC 32	8	45	28	30	35	174,50	**308**
PSC 32	10	50	35	35	39	174,50	**310**
PSC 32	12	55	42	40	44	174,50	**312**
PSC 40	6	50	25	30	35	190,60	**406**
PSC 40	8	50	28	30	35	190,60	**408**
PSC 40	10	50	35	30	39	190,60	**410**
PSC 40	12	55	42	35	44	190,60	**412**
PSC 40	14	55	44	35	44	190,60	**414**
PSC 40	16	55	48	35	47	190,60	**416**
PSC 50	6	50	25	30	35	194,70	**506**
PSC 50	8	50	28	30	35	194,70	**508**
PSC 50	10	55	35	35	39	194,70	**510**
PSC 50	12	60	42	40	44	194,70	**512**
PSC 50	14	60	44	40	44	194,70	**514**
PSC 50	16	60	48	40	47	194,70	**516**
PSC 50	18	60	50	40	47	194,70	**518**
PSC 50	20	60	52	40	47	194,70	**520**
PSC 50	25	80	65	60	54	194,70	**525** 1)
PSC 63	6	55	25	33	35	214,90	**606**
PSC 63	8	55	28	33	35	214,90	**608**
PSC 63	10	60	35	38	39	214,90	**610**
PSC 63	12	60	42	38	44	214,90	**612**
PSC 63	14	60	44	38	44	214,90	**614**
PSC 63	16	65	48	43	47	214,90	**616**
PSC 63	18	65	50	43	47	214,90	**618**
PSC 63	20	65	52	43	49	214,90	**620**
PSC 63	25	80	65	58	54	214,90	**625** 1)
PSC 63	32	90	72	68	58	214,90	**632** 1)
PSC 63	40	100	80	78	75	214,90	**640** 1)
PSC 80	6	70	25	40	35	236,60	**806**
PSC 80	8	70	28	40	35	236,60	**808**
PSC 80	10	70	35	40	39	236,60	**810**
PSC 80	12	70	42	40	44	236,60	**812**
PSC 80	14	70	44	40	44	236,60	**814**
PSC 80	16	70	48	50	47	236,60	**816**
PSC 80	18	70	50	40	47	236,60	**818**
PSC 80	20	70	52	40	49	236,60	**820**
PSC 80	25	80	65	50	54	236,60	**825** 1)
PSC 80	32	80	72	50	58	236,60	**832** 1)
PSC 80	40	110	80	80	75	236,60	**840** 1)
PSC 80	50	120	100	90	83	236,60	**850** 1)

1) Version with two grubscrews

Cylindrical Shank Adapter (Whistle Notch)

▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
▲ also available with Balluff chip **on request**

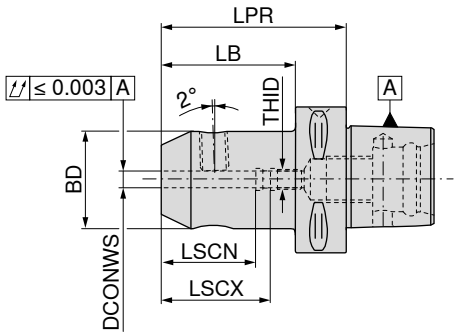

G 6,3 n_{max} 15000

Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSCX mm	LSCN mm	THID	84 102 ... EUR Y8	
PSC 32	6	70	25	55	38	28	M5	174,50	**306**
PSC 32	8	70	28	55	38	28	M6	174,50	**308**
PSC 32	10	70	35	55	41	31	M8	174,50	**310**
PSC 32	12	75	42	60	47	37	M10	174,50	**312**
PSC 40	6	70	25	50	38	28	M5	190,60	**406**
PSC 40	8	70	28	50	38	28	M6	190,60	**408**
PSC 40	10	70	35	50	41	31	M8	190,60	**410**
PSC 40	12	75	42	55	47	37	M10	190,60	**412**
PSC 40	14	75	44	55	47	37	M10	190,60	**414**
PSC 50	6	70	25	50	38	28	M5	194,70	**506**
PSC 50	8	70	28	50	38	28	M6	194,70	**508**
PSC 50	10	70	35	50	41	31	M8	194,70	**510**
PSC 50	12	75	42	55	47	37	M10	194,70	**512**
PSC 50	14	75	44	55	47	37	M10	194,70	**514**
PSC 50	16	80	48	60	50	40	M12	194,70	**516**
PSC 50	18	80	50	60	50	40	M12	194,70	**518**
PSC 50	20	85	52	65	52	42	M16	194,70	**520**
PSC 63	6	75	25	53	38	28	M5	214,90	**606**
PSC 63	8	75	28	53	38	28	M6	214,90	**608**
PSC 63	10	75	35	53	41	31	M8	214,90	**610**
PSC 63	12	80	42	58	47	37	M10	214,90	**612**
PSC 63	14	80	44	58	47	37	M10	214,90	**614**
PSC 63	16	80	48	58	50	40	M12	214,90	**616**
PSC 63	18	80	50	58	50	40	M12	214,90	**618**
PSC 63	20	85	52	63	52	42	M16	214,90	**620**
PSC 63	25	90	65	68	58	48	M16	214,90	**625** 1)
PSC 63	32	95	72	73	61	51	M16	214,90	**632** 1)
PSC 80	6	65	25	35	38	28	M5	236,60	**806**
PSC 80	8	65	28	35	38	28	M6	236,60	**808**
PSC 80	10	65	35	35	41	31	M8	236,60	**810**
PSC 80	12	70	42	40	47	37	M10	236,60	**812**
PSC 80	14	70	44	40	47	37	M10	236,60	**814**
PSC 80	16	75	48	45	50	40	M12	236,60	**816**
PSC 80	18	75	50	45	50	40	M12	236,60	**818**
PSC 80	20	80	52	50	52	42	M16	236,60	**820**
PSC 80	25	90	65	60	58	48	M16	236,60	**825** 1)
PSC 80	32	95	72	65	61	51	M16	236,60	**832** 1)

1) Version with two grubscrews

Grubscrew

Backstop screw IK

Spare parts DCONWS	62 950 ... EUR W7		84 950 ... EUR Y8	
6	M6x10 0,84	**006**	M5 10,69	**146**
8	M8x10 0,99	**008**	M6 10,69	**147**
10	M10x12 1,31	**010**	M8 10,69	**148**
12 - 14	M12x16 1,32	**012**	M10 10,69	**149**
16 - 18	M14x16 1,66	**016**	M12 10,69	**150**
20	M16x16 2,01	**020**	M16 10,69	**151**
25	M18x2x20 3,66	**025**	M16 10,69	**151**
32	M20x2x20 4,04	**032**	M16 10,69	**151**

Indexable insert drill adapter ISO 26623-1 PSC

- ▲ Run-out ≤ 0.005 mm
- ▲ max. speed 5,000 rpm
- ▲ Also available with Balluff chip **on request**

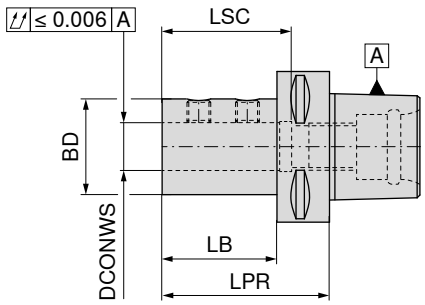

Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	84 128 ... EUR Y8	
PSC 32	16	60	36	45	49	288,00	**316**
PSC 32	20	60	40	45	54	288,00	**320**
PSC 40	16	60	36	40	49	297,40	**416**
PSC 40	20	60	40	40	54	297,40	**420**
PSC 40	25	70	45	50	59	297,40	**425**
PSC 50	16	65	36	45	49	319,10	**516**
PSC 50	20	65	40	45	54	319,10	**520**
PSC 50	25	70	45	50	59	319,10	**525**
PSC 50	32	75	52	55	63	319,10	**532**
PSC 63	16	70	36	48	49	319,10	**616**
PSC 63	20	70	40	48	54	319,10	**620**
PSC 63	25	75	45	53	59	319,10	**625**
PSC 63	32	75	52	53	63	319,10	**632**
PSC 63	40	85	65	63	73	319,10	**640**
PSC 63	50	115	75	93	83	319,10	**650**
PSC 80	16	80	36	50	49	381,30	**816**
PSC 80	20	80	40	50	54	381,30	**820**
PSC 80	25	85	45	55	59	381,30	**825**
PSC 80	32	90	52	60	63	381,30	**832**
PSC 80	40	95	65	65	73	381,30	**840**
PSC 80	50	100	75	70	83	381,30	**850**

Grubscrew

Spare parts DCONWS		83 950 ... EUR Y8	
16 - 20	M10x1x10	6,33	**180**
25 - 32	M12x1x12	6,33	**181**
40 - 50	M16x1x13	7,76	**182**

ER Collet chuck

▲ also available with Balluff chip **on request**

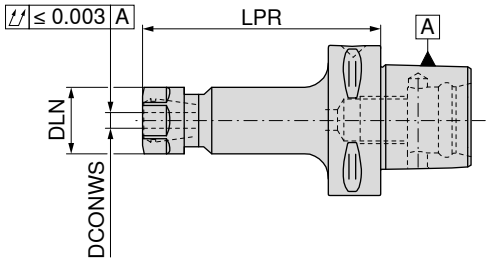

G 6,3 n_{max} 15000

84 114 ...

Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	EUR Y8	
PSC 32	1 - 10	45	28	8 - 56	426E (ER16)	154,20	**304**
PSC 40	1 - 10	55	28	8 - 56	426E (ER16)	163,60	**404**
PSC 50	1 - 10	60	28	8 - 56	426E (ER16)	174,50	**504**
PSC 50	1 - 10	100	28	8 - 56	426E (ER16)	205,50	**506**
PSC 63	1 - 10	60	28	8 - 56	426E (ER16)	174,50	**604**
PSC 63	1 - 10	100	28	8 - 56	426E (ER16)	205,50	**606**
PSC 80	1 - 10	100	28	8 - 56	426E (ER16)	225,80	**806**
PSC 80	1 - 10	60	28	8 - 56	426E (ER16)	194,70	**804**

Lock nut

62 950 ...

Spare parts for collet		EUR W7	
426E (ER16)	M22x1,5 - SW25	22,96	**044**

Accessories

ER collet

→ 268–276, 279

16

ER Collet chuck

▲ also available with Balluff chip **on request**

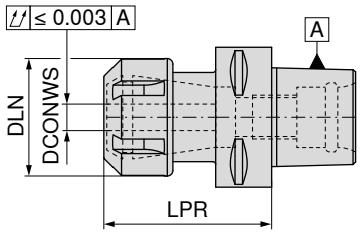

G 6,3 n_{max} 15000

84 115 ...

Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	EUR Y8	
PSC 32	1 - 13	45	34	16 - 80	428E (ER20)	154,20	**306** 1)
PSC 40	1 - 13	55	34	16 - 80	428E (ER20)	163,60	**404** 1)
PSC 40	1 - 16	55	42	24 - 104	430E (ER25)	163,60	**406**
PSC 40	2 - 20	55	50	24 - 136	470E (ER32)	163,60	**408**
PSC 50	1 - 13	60	34	16 - 80	428E (ER20)	174,50	**502** 1)
PSC 50	1 - 13	100	34	16 - 80	428E (ER20)	214,90	**504** 1)
PSC 50	1 - 16	60	42	24 - 104	430E (ER25)	174,50	**506**
PSC 50	1 - 16	100	42	24 - 104	430E (ER25)	214,90	**508**
PSC 50	2 - 20	60	50	24 - 136	470E (ER32)	185,30	**510**
PSC 50	2 - 20	100	50	24 - 136	470E (ER32)	225,80	**512**
PSC 50	3 - 26	65	63	176	472E (ER40)	190,60	**514**
PSC 50	3 - 26	100	63	176	472E (ER40)	232,60	**516**
PSC 63	1 - 13	60	34	16 - 80	428E (ER20)	174,50	**602** 1)
PSC 63	1 - 13	100	34	16 - 80	428E (ER20)	214,90	**604** 1)
PSC 63	1 - 16	60	42	24 - 104	430E (ER25)	174,50	**606**
PSC 63	1 - 16	100	42	24 - 104	430E (ER25)	214,90	**608**
PSC 63	2 - 20	60	50	24 - 136	470E (ER32)	185,30	**610**
PSC 63	2 - 20	100	50	24 - 136	470E (ER32)	225,80	**612**
PSC 63	3 - 26	65	63	176	472E (ER40)	190,60	**614**
PSC 63	3 - 26	100	63	176	472E (ER40)	232,60	**616**
PSC 80	1 - 13	65	34	16 - 80	428E (ER20)	236,60	**802** 1)
PSC 80	1 - 13	100	34	16 - 80	428E (ER20)	308,20	**804** 1)
PSC 80	1 - 16	70	42	24 - 104	430E (ER25)	236,60	**806**
PSC 80	1 - 16	100	42	24 - 104	430E (ER25)	308,20	**808**
PSC 80	2 - 20	70	50	24 - 136	470E (ER32)	236,60	**810**
PSC 80	2 - 20	100	50	24 - 136	470E (ER32)	308,20	**812**
PSC 80	3 - 26	80	63	176	472E (ER40)	236,60	**814**
PSC 80	3 - 26	100	63	176	472E (ER40)	308,20	**816**

1) with 6 position lock nut

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

	Lock nut			Lock nut IK			Lock nut			Y clamping key	
	62 950 ...			**83 950 ...**			**62 950 ...**			**83 357 ...**	
Spare parts for collet		EUR W7			EUR Y8			EUR W7		EUR Y8	
428E (ER20)	M25x1,5 - SW30	24,34	**045**	M25x1,5	42,17	**053**				21,34	**12000**
430E (ER25)				M32x1,5	51,29	**055**	M32x1,5	25,68	**055**	22,85	**125**
470E (ER32)				M40x1,5	54,43	**056**	M40x1,5	23,93	**65600**	31,09	**132**
472E (ER40)				M50x1,5	64,23	**057**	M50x1,5	23,26	**65700**	34,22	**140**

Accessories

ER collet

→ 268–276, 278–279

Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

Scope of supply:

Toolholder including clamping key SW4

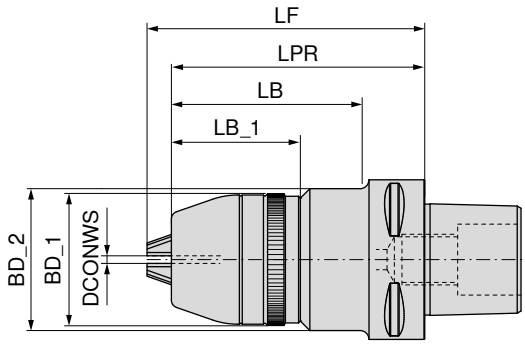

G 2,5 n_{max} 12000

84 111 ...

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LPR mm	LF mm	EUR Y8	
PSC 40	0,5 - 13	48,5	56	50,90	78,0	100	109,0	559,80	**01395**
PSC 40	2,5 - 16	51,0	56	52,15	78,0	100	110,5	574,60	**01695**
PSC 50	0,5 - 13	48,5	56	50,90	77,0	100	109,0	571,30	**01394**
PSC 50	2,5 - 16	51,0	56	52,15	77,0	100	110,5	586,20	**01694**
PSC 63	0,5 - 13	48,5	56	50,90	74,5	100	109,0	582,90	**01393**
PSC 63	2,5 - 16	51,0	56	52,15	74,5	100	110,5	598,20	**01693**

Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

Accessories

Others

→ 284

16

Synchronised quick change tap chuck with minimal length compensation

▲ For collets according to DIN 6499
▲ With length compensation under tension and under compression (LZD)
▲ $p_{max.}$ = 50 bar
▲ also available with Balluff chip **on request**

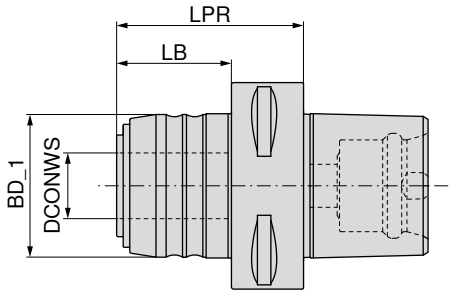

84 140 ...

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LB mm	LZD± mm	EUR Y8	
PSC 63	M3 - M12	1	57	43	20	35	1,0 / 0,2	699,00	**612**
PSC 63	M6 - M20	2	77	60	32	55	1,0 / 0,2	784,00	**620**

Insert for synchro quick change tapping chuck with minimum length compensation

▲ SZID = for insert size

Scope of supply:
Includes lock nut

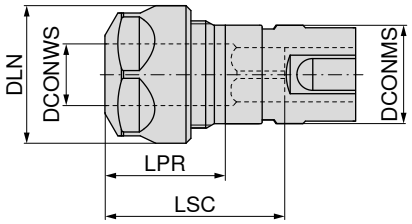

83 608 ...

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	EUR Y8	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	142,00	**012** [1]
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	164,90	**020**

1) with 6 position lock nut

Spare parts insert for synchro quick change tapping chuck with minimum length compensation

Lock nut

Lock nut IK

Lock nut

Y clamping key

Spare parts for Article no.		62 950 ... EUR W7			83 950 ... EUR Y8			62 950 ... EUR W7			83 357 ... EUR Y8	
83 608 012	M22x1,5 - SW25	22,96	044	M22x1,5	39,48	054	M22x1,5	22,96	054	M22x1,5	20,69	116
83 608 020				M32x1,5	51,29	055	M32x1,5	25,68	055	M32x1,5	22,85	125

Quick change tap chuck with length compensation

▲ With length compensation under tension and compression (LZD)
▲ also available with Balluff chip **on request**

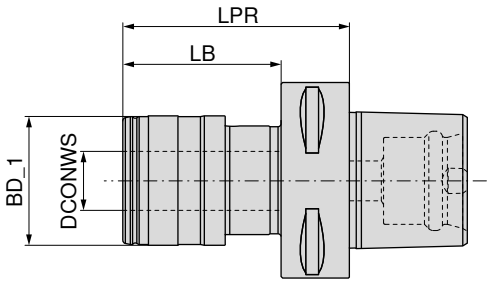

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LB mm	LZD± mm	84 142 ... EUR Y8	
PSC 63	M3 - M12	01	73	41	19	51	7,5	724,60	612
PSC 63	M6 - M20	02	97	60	31	75	10	813,70	620

Accessories

Collet

→ 288–292

16

Adapter with ABS Connection

▲ also available with Balluff chip **on request**

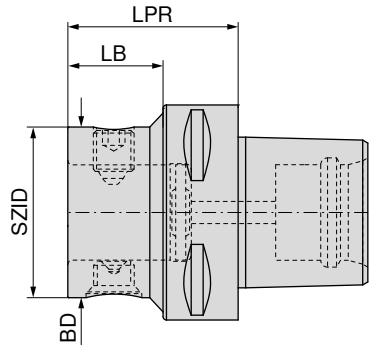

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	84 215 ... EUR Y8/3K	
PSC 40	A69 04050	ABS 50	50	50	30	518,10	**04097**
PSC 50	A69 05050	ABS 50	50	50	30	518,10	**05097**
PSC 63	A69 06050	ABS 50	50	50	28	582,90	**06397**
PSC 63	A69 06060	ABS 63	63	60	36	582,90	**06396**
PSC 80	A69 08050	ABS 50	50	50	23	647,60	**08097**
PSC 80	A69 08060	ABS 63	63	60	30	647,60	**08096**
PSC 80	A69 08070	ABS 80	80	80	50	647,60	**08092**

Clamping screw

Taper screw

Spare parts SZID	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**

Torsional vibration damper with ABS connection

▲ also available with Balluff chip **on request**

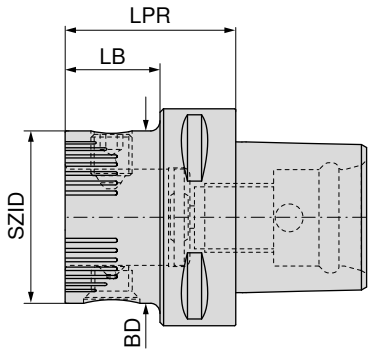

NEW

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	84 206 ... EUR 3E	
PSC 50	A69 05060	ABS 50	50	50	30	888,40	**05094**
PSC 63	A69 06070	ABS 50	50	50	28	921,60	**05093**
PSC 63	A69 06080	ABS 63	63	60	38	1.007,00	**06393**
PSC 80	A69 08090	ABS 50	50	50	23	1.255,00	**05086**
PSC 80	A69 08100	ABS 63	63	60	30	1.378,00	**06386**
PSC 80	A69 08110	ABS 80	80	80	50	1.510,00	**08086**

Clamping screw

Taper screw

Spare parts SZID	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**

Accessories

Coolant transfer pipe
→ 176

Others
→ 284

Adapter for screw-in milling cutter

▲ also available with Balluff chip **on request**

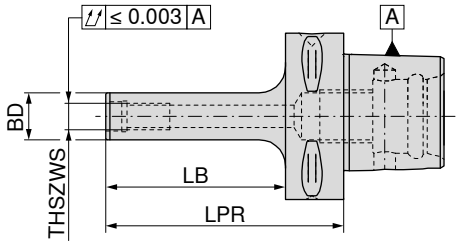

G 2,5 n_{max} 20000

84 110 ...

Adapter	THSZWS	LPR mm	BD mm	LB mm	EUR Y8	
PSC 32	M8	60	13	45	236,60	**302**
PSC 32	M10	70	18	55	236,60	**306**
PSC 40	M8	70	13	50	242,00	**402**
PSC 40	M10	80	18	60	242,00	**405**
PSC 40	M12	80	21	60	242,00	**408**
PSC 50	M8	70	13	50	246,10	**502**
PSC 50	M10	80	18	60	246,10	**505**
PSC 50	M12	80	21	60	246,10	**508**
PSC 50	M16	80	29	60	246,10	**512**
PSC 63	M8	70	13	48	267,80	**602**
PSC 63	M10	90	18	68	267,80	**605**
PSC 63	M12	100	21	78	267,80	**608**
PSC 63	M16	100	29	78	267,80	**612**

Accessories

Coolant transfer pipe

→ 176

Shell mill adapters

▲ for cutters with longitudinal or transverse groove
▲ also available with Balluff chip **on request**

Scope of supply:
Holder with clamping screw and drive key

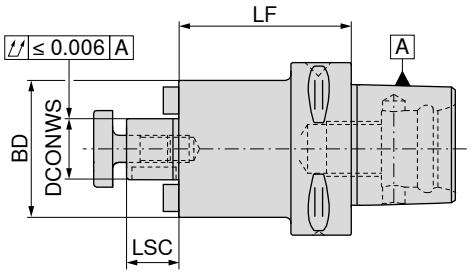

G 6,3 n_{max} 15000

Adapter	DCONWS mm	LF mm	BD mm	LSC mm	84 122 ... EUR Y8	
PSC 40	16	28	40	17	185,30	**401**
PSC 40	16	63	40	17	194,70	**402**
PSC 40	22	40	50	19	185,30	**411**
PSC 40	22	63	50	19	194,70	**412**
PSC 50	16	28	40	17	185,30	**501**
PSC 50	16	63	40	17	194,70	**502**
PSC 50	22	28	50	19	185,30	**511**
PSC 50	22	63	50	19	194,70	**512**
PSC 50	27	32	50	21	185,30	**521**
PSC 50	27	63	50	21	194,70	**522**
PSC 50	32	40	63	24	185,30	**531**
PSC 50	32	63	63	24	194,70	**532**
PSC 63	16	63	40	17	205,50	**602**
PSC 63	22	28	63	19	194,70	**611**
PSC 63	22	63	50	19	205,50	**612**
PSC 63	27	28	58	21	194,70	**621**
PSC 63	27	63	58	21	205,50	**622**
PSC 63	32	22	63	24	194,70	**631**
PSC 63	32	86	63	24	205,50	**632**
PSC 63	40	40	70	27	225,80	**641**
PSC 80	16	63	40	17	242,00	**802**
PSC 80	22	30	50	19	233,80	**811**
PSC 80	22	63	50	19	242,00	**812**
PSC 80	27	30	58	21	233,80	**821**
PSC 80	27	63	58	21	242,00	**822**
PSC 80	32	30	63	24	233,80	**831**
PSC 80	32	86	63	24	242,00	**832**
PSC 80	40	40	70	27	233,80	**841**

drive key

drive dog

Cross nut key

Cross screw

clamping screw

Spare parts DCONWS	84 950 ... EUR Y8		84 950 ... EUR Y8		83 368 ... EUR Y8			83 367 ... EUR Y8			83 950 ... EUR Y8/3B	
16	4,02	**108**	9,15	**113**	13,79	**116**	M8	4,17	**016**	M8x25	3,72	**113**
22	4,02	**109**	10,69	**114**	17,18	**122**	M10	4,58	**022**	M10x25	4,28	**124**
27	4,02	**110**	11,58	**115**	22,03	**127**	M12	5,85	**027**	M12x30	4,73	**125**
32	4,02	**111**	13,15	**116**	28,38	**132**	M16	9,39	**032**	M16x35	5,88	**126**
40	4,02	**112**	14,73	**117**	39,63	**140**	M20	14,89	**040**	M20x40 - SW17	8,35	**112**

Taper sleeve DIN 6383 for DIN 228-2D Morse taper shanks

▲ also available with Balluff chip **on request**

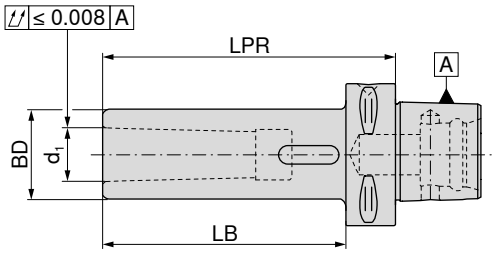

Adapter	d_1	LPR mm	BD mm	LB mm	84 126 ... EUR Y8	
PSC 40	MK2	110	32	90	194,70	**402**
PSC 40	MK3	130	40	119	205,50	**403**
PSC 50	MK2	110	32	90	205,50	**502**
PSC 50	MK3	130	40	110	214,90	**503**
PSC 50	MK4	150	48	132	225,80	**504**
PSC 63	MK2	110	32	88	205,50	**602**
PSC 63	MK3	130	40	108	214,90	**603**
PSC 63	MK4	150	48	128	225,80	**604**
PSC 80	MK2	120	32	90	236,60	**802**
PSC 80	MK3	140	40	110	256,90	**803**
PSC 80	MK4	160	48	130	277,30	**804**

Blank

- ▲ Material: 25CrMoV4
- ▲ for production of special tools
- ▲ Taper hardened and ground
- ▲ Special tool area in soft state
- ▲ also available with Balluff chip **on request**

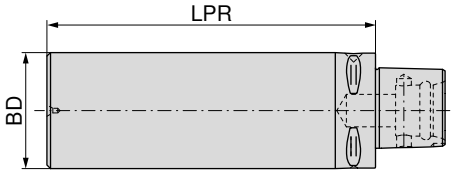

Adapter	BD mm	LPR mm	84 134 ... EUR Y8	
PSC 40	40	95	143,20	**402**
PSC 40	40	120	154,20	**403**
PSC 40	60	165	163,60	**404**
PSC 40	80	75	185,30	**405**
PSC 40	80	120	194,70	**406**
PSC 40	100	85	205,50	**408**
PSC 50	50	125	163,60	**502**
PSC 50	50	150	174,50	**503**
PSC 50	75	175	194,70	**504**
PSC 50	90	80	205,50	**506**
PSC 50	95	150	214,90	**508**
PSC 50	110	90	205,50	**510**
PSC 63	63	180	194,70	**602**
PSC 63	75	195	205,50	**604**
PSC 63	110	85	205,50	**606**
PSC 63	120	180	308,20	**608**
PSC 63	130	95	236,60	**610**
PSC 80	80	200	236,60	**802**
PSC 80	120	160	236,60	**804**
PSC 80	130	90	225,80	**806**
PSC 80	145	200	256,90	**808**

Test bar

▲ also available with Balluff chip **on request**

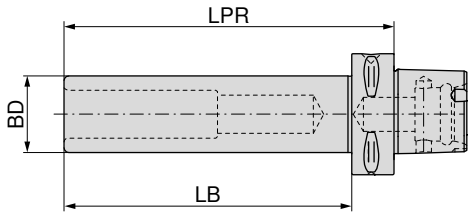

Adapter	LPR mm	BD mm	LB mm	84 136 ... EUR Y8	
PSC 32	175	25	160	695,00	**030**
PSC 40	180	25	160	770,40	**040**
PSC 50	235	32	215	823,40	**050**
PSC 63	322	40	300	866,60	**060**
PSC 80	330	40	300	1.040,00	**080**

Coolant pipe – PSC

Scope of supply:
complete, including seals

Adapter	THOD	84 116 ... EUR Y8	
PSC 40	M14 x 1,5	38,99	**04000**
PSC 50	M16 x 1,5	41,01	**05000**
PSC 63	M20 x 2,0	43,02	**06300**
PSC 80	M20 x 2,0	53,59	**08000**

Key – PSC

Adapter	84 117 ... EUR Y8	
PSC 40	35,04	**04000**
PSC 50	37,52	**05000**
PSC 63	40,08	**06300**
PSC 80	54,20	**08000**

Pull stud for PSC adapter

▲ for front clamping

Scope of supply:
including O-Ring



NEW

Adapter	LF mm	OAL mm	BD mm	CRKS	83 235 ... EUR Y8	
PSC 40	26,3	56	20	M14x1,5	86,35	**04000**
PSC 50	33,0	69	25	M16x1,5	86,35	**05000**
PSC 63	33,0	79	31	M20x2	121,90	**06300**

HyTens – Fit

▲ Hydraulic chuck with ABS connection
▲ for solid carbide and HSS shanks to h6 tolerance or better

Scope of supply:
Base body including backstop screw

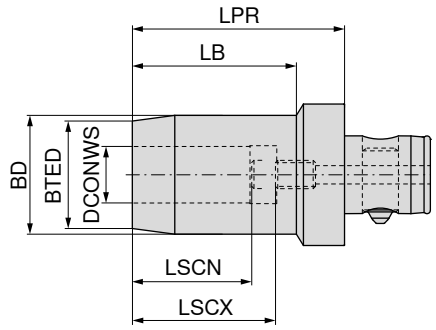

NEW

84 253 ...

Adapter	DCONWS mm	BTED mm	BD mm	LPR mm	LB mm	LSCX mm	LSCN mm	EUR Y8	
ABS 40	6	22	26	55	36,5	37	27	528,10	**00688**
ABS 40	8	24	28	60	42,0	37	27	528,10	**00888**
ABS 40	10	26	30	65	47,5	41	31	528,10	**01088**
ABS 40	12	28	32	65	48,0	46	36	528,10	**01288**
ABS 50	6	22	26	55	33,5	37	27	590,90	**00697**
ABS 50	8	24	28	55	34,0	37	27	590,90	**00897**
ABS 50	10	26	30	65	45,0	41	31	590,90	**01097**
ABS 50	12	28	32	65	45,5	46	36	590,90	**01297**
ABS 50	14	30	34	65	46,0	46	36	590,90	**01497**
ABS 50	16	34	38	70	52,0	49	39	590,90	**01697**
ABS 50	18	36	40	70	52,5	49	39	590,90	**01897**
ABS 50	20	38	42	75	58,0	51	41	590,90	**02097**
ABS 63	20	38	42	78	56,0	51	41	751,20	**02096**
ABS 63	25	53	57	85	60,0	57	47	751,20	**02596**
ABS 63	32	60	64	90	61,0	61	51	751,20	**03296**

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7	
6	M5x12,5 - SW2,5	10,45	**418**
8	M6x12,5 - SW3	10,45	**419**
10	M8x1x13,5 - SW3	10,45	**420**
12	M10x1x13,5 - SW5	10,45	**421**
14	M10x1x13,5 - SW5	10,45	**421**
16	M10x1x13,5 - SW5	10,45	**421**
18	M10x1x13,5 - SW5	10,45	**421**
20	M16x1x13,5 - SW5	12,04	**423**
25	M16x1x13,5 - SW5	12,04	**423**
32	M16x1x13,5 - SW5	12,04	**423**

For an overview of the ABS spare parts, take a look at **page 314**.

Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better

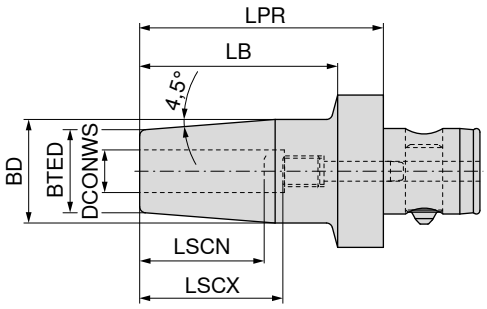

G 6,3 n_{max} 15000

Adapter	KOMET no.	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCX mm	LSCN mm	84 222 ... EUR 3E	
ABS 32	A32 26040	6	70	27	21	56	36	26	590,60	**00689**
ABS 32	A32 26050	8	70	27	21	56	36	26	305,80	**00889**
ABS 32	A32 26061	10	70	32	24	56	42	32	425,70	**01089**
ABS 32	A32 26071	12	80	32	24	66	47	37	338,80	**01289**
ABS 40	A32 36050	8	70	27	21	56	36	26	437,70	**00888**
ABS 40	A32 36061	10	70	32	24	56	42	32	341,70	**01088**
ABS 40	A32 36071	12	80	32	24	66	47	37	431,70	**01288**
ABS 40	A32 36091	16	90	34	27	76	50	40	554,60	**01688**
ABS 50	A32 46040	6	75	27	21	56	36	26	329,80	**00697**
ABS 50	A32 46050	8	75	27	21	56	36	26	407,80	**00897**
ABS 50	A32 46061	10	80	32	24	61	42	32	401,80	**01097**
ABS 50	A32 46071	12	80	32	24	61	47	37	338,80	**01297**
ABS 50	A32 46081	14	80	34	27	61	47	37	407,80	**01497**
ABS 50	A32 46091	16	85	34	27	66	50	40	389,70	**01697**
ABS 50	A32 46101	18	85	42	33	66	50	40	332,80	**01897**
ABS 50	A32 46111	20	90	42	33	71	52	42	296,80	**02097**
ABS 63	A32 56111	20	90	42	33	71	52	42	374,70	**02096**
ABS 63	A32 56121	25	95	53	44	76	58	48	380,80	**02596**
ABS 63	A32 56131	32	95	53	44	76	58	48	503,70	**03296**

Backstop screw

Spare parts DCONWS		84 950 ... EUR W7/6B	
6	M5x18	4,73	**21400**
8	M6x20	4,73	**21500**
10	M8x1x20	3,50	**21600**
12	M10x1x20	4,39	**21700**
14	M10x1x20	4,39	**21700**
16	M12x1x20	6,09	**21800**
18	M12x1x20	6,09	**21800**
20	M8x1x20	7,89	**21900**
25	M8x1x20	7,89	**21900**
32	M8x1x20	7,89	**21900**

For an overview of the ABS spare parts, take a look at **page 314**.

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat

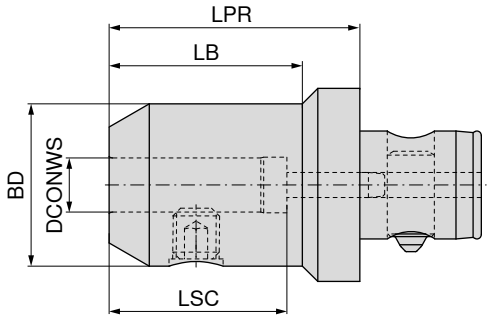

Adapter	KOMET no.	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	84 221 ... EUR 3E	
ABS 50	A32 40010	6	45	25,0	27	40	218,80	**00697**
ABS 50	A32 40020	8	45	28,0	27	40	218,80	**00897**
ABS 50	A32 40030	10	55	35,0	37	44	218,80	**01097**
ABS 50	A32 40040	12	65	42,0	50	49	245,80	**01297**
ABS 50	A32 40080	14	65	44,0	50	49	236,90	**01497**
ABS 50	A32 40050	16	65	48,0	50	52	242,90	**01697**
ABS 50	A32 40090	18	65	49,9	50	52	272,80	**01897**
ABS 50	A32 40060	20	65	52,0	50	54	260,80	**02097**
ABS 50	A32 40070	25	75	65,0	60	60	248,90	**02597**[1)]
ABS 63	A32 50040	12	65	42,0	50	49	350,80	**01296**
ABS 63	A32 50100	14	65	44,0	50	49	374,70	**01496**
ABS 63	A32 50050	16	65	48,0	50	52	320,90	**01696**
ABS 63	A32 50110	18	65	50,0	50	52	329,80	**01896**
ABS 63	A32 50060	20	65	52,0	45	54	275,80	**02096**
ABS 63	A32 50070	25	75	65,0	60	60	272,80	**02596**[1)]
ABS 63	A32 50080	32	80	72,0	65	64	278,90	**03296**[1)]
ABS 80	A32 60060	20	65	52,0	45	54	392,80	**02092**
ABS 80	A32 60070	25	75	65,0	55	60	380,80	**02592**[1)]
ABS 80	A32 60080	32	80	72,0	66	64	284,90	**03292**[1)]

1) Version with two grubscrews

Grubscrew

Spare parts DCONWS		62 950 ... EUR W7	
6	M6x10	0,84	**006**
8	M8x10	0,99	**008**
10	M10x12	1,31	**010**
12	M12x16	1,32	**012**
14	M12x16	1,32	**012**
16	M14x16	1,66	**016**
18	M14x16	1,66	**016**
20	M16x16	2,01	**020**
25	M18x2x20	3,66	**025**
32	M20x2x20	4,04	**032**

For an overview of the ABS spare parts, take a look at **page 314**.

16

Cylindrical Shank Adapter (Whistle Notch)

▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat

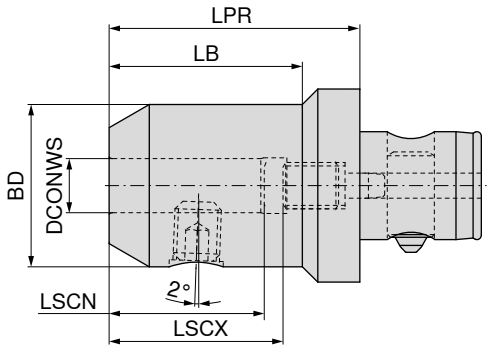

Adapter	KOMET no.	DCONWS mm	LPR mm	LB mm	BD mm	LSCX mm	LSCN mm	84 220 ... EUR 3E	
ABS 25	A30 10601	6	55	40	24,9	36	26	242,90	**00690**
ABS 25	A30 10801	8	55	40	28,0	36	26	257,90	**00890**
ABS 25	A30 11001	10	60	45	35,0	40	30	242,90	**01090**
ABS 32	A30 20601	6	55	40	25,0	36	26	248,90	**00689**
ABS 32	A30 20801	8	55	40	28,0	36	26	248,90	**00889**
ABS 32	A30 20901	9	55	40	28,0	36	26	269,80	**00989**
ABS 32	A30 21001	10	60	45	35,0	40	30	227,90	**01089**
ABS 32	A30 21201	12	65	50	42,0	45	35	251,80	**01289**
ABS 32	A30 21401	14	65		42,0	45	35	341,70	**01489**
ABS 40	A30 30601	6	55	35	25,0	36	26	344,80	**00688**
ABS 40	A30 30801	8	55	35	28,0	36	26	284,90	**00888**
ABS 40	A30 31001	10	60	45	35,0	40	30	311,80	**01088**
ABS 40	A30 31201	12	65	50	42,0	45	35	260,80	**01288**
ABS 40	A30 31401	14	65	50	42,0	45	35	359,80	**01488**
ABS 40	A30 31601	16	70	55	48,0	48	38	335,80	**01688**
ABS 40	A30 31801	18	70	55	48,0	48	38	356,80	**01888**
ABS 50	A30 40601	6	55	30	25,0	36	26	248,90	**00697**
ABS 50	A30 40801	8	55	30	28,0	36	26	266,80	**00897**
ABS 50	A30 41001	10	60	40	35,0	40	30	245,80	**01097**
ABS 50	A30 41201	12	65	50	42,0	45	35	260,80	**01297**
ABS 50	A30 41301	13	65	50	42,0	45	35	428,80	**01397**
ABS 50	A30 41401	14	65	50	42,0	45	35	296,80	**01497**
ABS 50	A30 41601	16	70	55	48,0	48	38	275,80	**01697**
ABS 50	A30 41801	18	70	55	48,0	48	38	326,70	**01897**
ABS 50	A30 42002	20	75	60	52,0	50	40	308,80	**02097**
ABS 50	A30 42202	22	75	60	52,0	50	40	428,80	**02297**
ABS 50	A30 42502	25	75	60	52,0	50	40	296,80	**02597**[1)]
ABS 63	A30 51001	10	60	35	35,0	40	30	365,80	**01096**
ABS 63	A30 51201	12	65	45	42,0	45	35	320,90	**01296**
ABS 63	A30 51401	14	65	45	42,0	45	35	377,70	**01496**
ABS 63	A30 51601	16	70	50	48,0	48	38	356,80	**01696**
ABS 63	A30 51801	18	70	50	48,0	48	38	386,80	**01896**
ABS 63	A30 52001	20	75	55	52,0	50	40	341,70	**02096**
ABS 63	A30 52501	25	80	65	65,0	56	46	296,80	**02596**[1)]
ABS 63	A30 52801	28	80	65	65,0	56	46	953,30	**02896**[1)]
ABS 80	A30 62501	25	80	60	65,0	56	46	332,80	**02592**[1)]
ABS 80	A30 63201	32	90	70	72,0	60	50	407,80	**03292**[1)]

1) Version with two grubscrews

Spare parts
cylindrical shank adapter (Whistle Notch) with ABS connection

Grubscrew

Backstop screw

		62 950 ...			84 950 ...	
Spare parts DCONWS		EUR W7			EUR W7/6B	
6	M6x10	0,84	**006**	M5x16	3,43	**20500**
8	M8x10	0,99	**008**	M6x16 - SW2,5	3,43	**20600**
9	M8x10	0,99	**008**	M8x1x16 - SW3	3,43	**20800**
10	M10x12	1,31	**010**	M8x1x16 - SW2,5	3,43	**20700**
12	M12x16	1,32	**012**	M10x1x18 - SW3	4,31	**20900**
13	M12x16	1,32	**012**	M12x1x17 - SW3	5,97	**21000**
14	M12x16	1,32	**012**	M12x1x17 - SW3	5,97	**21000**
16	M14x16	1,66	**016**	M14x1x19 - SW4	7,18	**21100**
18	M14x16	1,66	**016**	M14x1x19 - SW4	7,18	**21100**
20	M16x16	2,01	**020**	M16x1x21 - SW5	7,74	**21200**
22	M16x16	2,01	**020**	M16x1x21 - SW5	7,74	**21200**
25	M16x16	2,01	**020**	M16x1x21 - SW5	7,74	**21200**
28	M18x2x20	3,66	**025**	M16x1x21 - SW5	7,74	**21200**
32	M20x2x20	4,04	**032**	M20x1x27 - SW8	11,83	**21300**

For an overview of the ABS spare parts, take a look at **page 314**.

ER collet chuck with ABS connection

Scope of supply:
Holder with lock nut and adjustable back stop

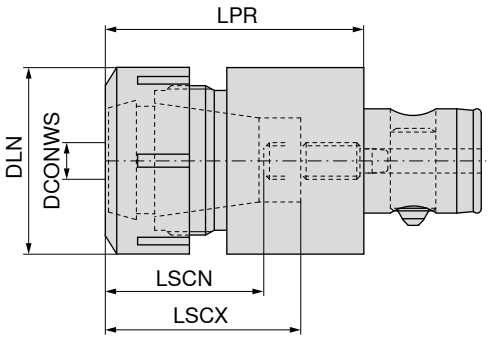

Adapter	KOMET no.	for collet	DCONWS mm	LPR mm	DLN mm	LSCX mm	LSCN mm	84 224 ... EUR 3E	
ABS 25	A33 11120	426E (ER16)	1 - 10	40,1	28	31	28	270,60	**01690**[1)]
ABS 32	A33 12130	428E (ER20)	1 - 13	52,5	34	39	35	297,30	**02089**[1)]
ABS 40	A33 13141	430E (ER25)	1 - 16	62,0	42	46	43	317,40	**02588**
ABS 50	A33 14151	470E (ER32)	2 - 20	69,3	50	51	48	366,80	**03297**
ABS 63	A33 15161	472E (ER40)	3 - 26	78,3	63	55	52	361,70	**04096**

1) with 6 position lock nut

Lock nut

Lock nut IK

Lock nut

Backstop screw

Spare parts for collet	62 950 ... EUR W7		83 950 ... EUR Y8		62 950 ... EUR W7		84 950 ... EUR W7/6B	
426E (ER16)	M22x1,5 - SW25	22,96 **044**	M22x1,5	39,48 **054**			M5x8 - SW2	3,43 **22500**
428E (ER20)	M25x1,5 - SW30	24,34 **045**	M25x1,5	42,17 **053**			M6x12 - SW2,5	3,43 **22000**
430E (ER25)			M32x1,5	51,29 **055**	M32x1,5	25,68 **055**	M8x1x14 - SW4	3,77 **22600**
470E (ER32)			M40x1,5	54,43 **056**	M40x1,5	23,93 **65600**	M10x1x14 - SW5	4,31 **22700**
472E (ER40)			M50x1,5	64,23 **057**	M50x1,5	23,26 **65700**	M12x1x18 - SW8	5,97 **22800**

For an overview of the ABS spare parts, take a look at **page 314**.

Quick change tap chuck with length compensation

▲ With length compensation under tension and compression (LZD)

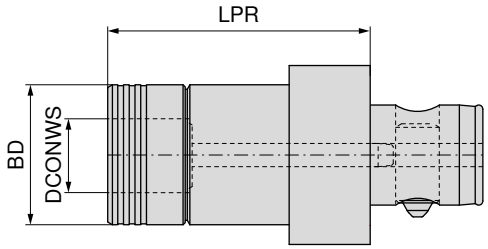

Adapter	KOMET no.	DCONWS mm	BD mm	LPR mm	SZID	84 225 ... EUR 3E	
ABS 32	A34 32060	19	39	69	01	1.254,00	**01989**
ABS 40	A34 33060	19	39	73	01	1.625,00	**01988**
ABS 50	A34 34060	19	39	72	01	1.539,00	**01997**
ABS 50	A34 34070	31	60	98	02	1.886,00	**03197**
ABS 63	A34 35070	31	60	111	02	1.903,00	**03196**

Short drill chuck

Scope of supply:
Toolholder including clamping key SW4

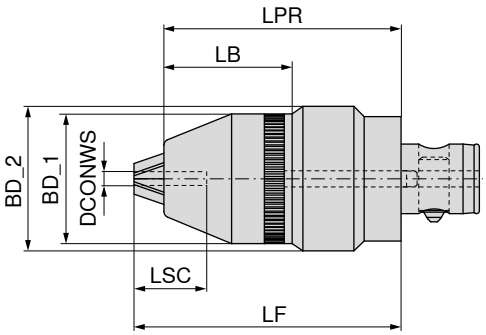

G 6,3 n_{max} 10000

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LPR mm	LSC mm	LF mm	LB mm	84 247 ... EUR Y8	
ABS 50	0,5 - 13	49	57,5	95	29	104,0	51,5	722,70	**01397**
ABS 50	2,5 - 16	52	57,5	95	29	105,5	52,0	734,00	**01697**

Accessories

Collet	Pull studs	Others
→ 288–292	→ 58	→ 284

16

Synchro tapping chuck

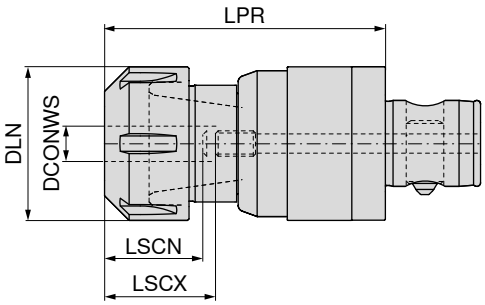

84 226 ...

Adapter	KOMET no.	for collet	DCONWS mm	LPR mm	DLN mm	LSCX mm	LSCN mm	EUR Y8/3K	
ABS 32	50795131002000	ER 20	1 - 13	78,0	34	42	29	1.139,00	**02089**
ABS 50	50795135002000	ER 20	1 - 13	85,0	34	42	29	1.187,00	**02097**
ABS 50	50795135003200	ER 32	2 - 20	90,5	50	45	31	1.266,00	**03297**

For an overview of the ABS spare parts, take a look at **page 314**.

Accessories

ER collet

→ 268–276, 278–279

Shell mill adapter

Scope of supply:
Base body including drive dogs and retaining screw

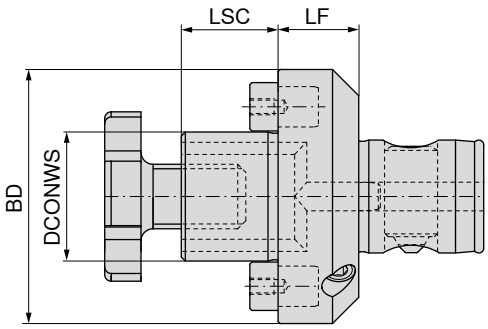



Adapter	KOMET no.	DCONWS mm	LSC mm	LF mm	BD mm	84 228 ... EUR 3E		84 228 ... EUR 3E	
ABS 50	A40 24023	16	17	20	50			376,80	**01697**
ABS 50	A40 24034	22	19	20	50			359,20	**02297**
ABS 50	A40 24043	27	21	20	50			384,50	**02797**
ABS 50	A40 24053	32	24	20	63			423,70	**03297**
ABS 63	A40 25032	22	19	22	63			435,00	**02296**
ABS 63	A40 25042	27	21	22	63			459,10	**02796**
ABS 63	A40 25052	32	24	22	63			473,00	**03296**
ABS 63	A40 25062	40	27	22	80			488,20	**04096**
ABS 80	A40 26042	27	21	25	80			476,80	**02792**
ABS 80	A40 26052	32	24	25	80			481,80	**03292**
ABS 80	A40 26062	40	27	25	80			487,00	**04092**
ABS 80	A40 16062	40	30	43	88	634,90	**14092**		
ABS 100	A40 27052	32	24	25	100			627,30	**03291**
ABS 100	A40 17062	40	30	38	88	540,00	**14091**		
ABS 100	A40 27062	40	27	25	100			546,40	**04091**
ABS 100	A40 17072	60	40	56	130	689,30	**06091**		

Drive dog

Driver

Cross screw

Spare parts DCONWS	84 950 ... EUR W7/6B		83 950 ... EUR Y8/3B		83 367 ... EUR Y8	
16					4,17	**016**
22	38,49	**22900**			4,58	**022**
27	40,64	**23000**			5,85	**027**
32	38,49	**23100**			9,39	**032**
40					14,89	**040**
40			14,47	**295**		
60			18,80	**298**		

For an overview of the ABS spare parts, take a look at **page 314**.

16

Combination shell mill adapter

▲ For milling cutters with transverse or longitudinal groove according to DIN 6358

Scope of supply:

Base body including retaining screw, drive ring and drive key

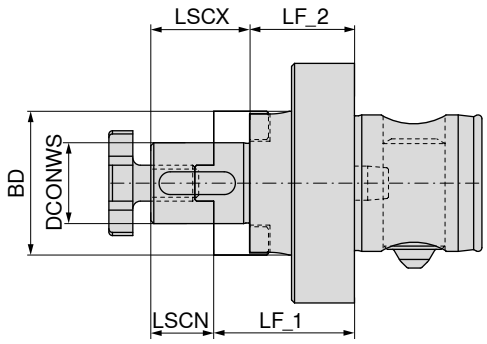



Adapter	KOMET no.	DCONWS mm	BD mm	LF_1 mm	LF_2 mm	LSCX mm	LSCN mm	84 229 ... EUR 3E	
ABS 50	A40 04022	16	32	32	22	27	17	292,10	**01697**
ABS 50	A40 04032	22	40	34	22	31	19	282,00	**02297**
ABS 63	A40 05021	16	32	36	26	27	17	409,70	**01696**
ABS 63	A40 05031	22	40	38	26	31	19	460,30	**02296**
ABS 63	A40 05041	27	48	38	26	33	21	357,90	**02796**
ABS 80	A40 06031	22	40	45	33	31	19	538,80	**02292**
ABS 80	A40 06041	27	48	45	33	33	21	484,40	**02792**
ABS 80	A40 06051	32	58	47	33	38	24	404,70	**03292**
ABS 80	A40 06061	40	70	47	33	41	27	426,20	**04092**

Parallel key

Drive ring

Cross screw

Spare parts DCONWS		83 950 ... EUR Y8/3B		83 370 ... EUR Y8			83 367 ... EUR Y8	
16	4 x 4 x 20	2,11	**284**	12,79	**116**	M8	4,17	**016**
22	6 x 6 x 25	2,11	**285**	14,21	**122**	M10	4,58	**022**
27	7 x 7 x 25	4,04	**286**	15,28	**127**	M12	5,85	**027**
32	8 x 7 x 28	2,43	**287**	18,25	**132**	M16	9,39	**032**
40	10 x 8 x 32	2,57	**288**	27,16	**140**	M20	14,89	**040**

For an overview of the ABS spare parts, take a look at **page 314**.

Extension with ABS Connection

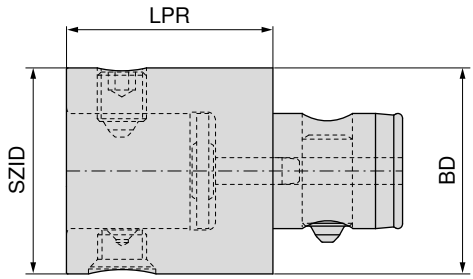

Adapter	KOMET no.	SZID	BD mm	LPR mm	84 209 ... EUR 3E	
ABS 25	A20 00020	ABS 25	25	45	297,30	**04590**
ABS 25	A20 00220	ABS 25	25	60	297,30	**06090**
ABS 32	A20 00530	ABS 32	32	35	314,50	**03589**
ABS 32	A20 00030	ABS 32	32	50	314,50	**05089**
ABS 32	A20 00230	ABS 32	32	70	314,50	**07089**
ABS 40	A20 00540	ABS 40	40	40	331,50	**04088**
ABS 40	A20 00040	ABS 40	40	60	331,50	**06088**
ABS 40	A20 00240	ABS 40	40	90	331,50	**09088**
ABS 50	A20 00550	ABS 50	50	50	369,60	**05097**
ABS 50	A20 00050	ABS 50	50	65	369,60	**06597**
ABS 50	A20 00250	ABS 50	50	100	369,60	**10097**
ABS 50	A20 00150	ABS 50	50	150	369,60	**15097**
ABS 63	A20 00560	ABS 63	63	60	418,20	**06096**
ABS 63	A20 00060	ABS 63	63	85	418,20	**08596**
ABS 63	A20 00260	ABS 63	63	125	418,20	**12596**
ABS 63	A20 00160	ABS 63	63	190	418,20	**19096**
ABS 80	A20 00570	ABS 80	80	70	493,20	**07092**
ABS 80	A20 00070	ABS 80	80	85	493,20	**08592**
ABS 80	A20 00270	ABS 80	80	125	514,20	**12592**
ABS 80	A20 00170	ABS 80	80	240	514,20	**24092**
ABS 100	A20 00580	ABS 100	100	85	549,70	**08591**
ABS 100	A20 00080	ABS 100	100	125	549,70	**12591**
ABS 100	A20 00280	ABS 100	100	160	578,70	**16091**
ABS 125	A20 00090	ABS 125	125	160	651,00	**16085**
ABS 125	A20 00290	ABS 125	125	200	686,60	**20085**

Spare parts Adapter	 Clamping screw 62 950 ... EUR XX		 Clamping screw 84 950 ... EUR XX		 Positioning pin 84 950 ... EUR XX		 Pendulum bolt 84 950 ... EUR XX		 Coolant pipe 84 950 ... EUR XX		 Taper screw 84 950 ... EUR XX	
ABS 25			12,08	**26800**	8,16	**23600**	38,65	**26000**	8,22	**24400**	17,70	**27000**
ABS 32	12,08	**13989**			17,96	**23700**	35,79	**26100**	8,53	**24500**	17,70	**27100**
ABS 40			13,47	**26900**	17,96	**23800**	38,70	**26200**	8,53	**24600**	18,15	**27200**
ABS 50			15,74	**20300**	18,47	**20200**	44,97	**20000**	9,23	**20100**	20,18	**20400**
ABS 63			17,32	**25500**	19,09	**23900**	45,66	**26300**	9,28	**24700**	21,62	**27300**
ABS 80			19,61	**25600**	19,29	**24000**	48,17	**26400**	9,55	**24800**	24,15	**25100**
ABS 100			23,21	**25700**	20,41	**24100**	54,00	**26500**	10,83	**24900**	25,41	**25200**
ABS 125			36,36	**25800**	32,43	**24200**	74,36	**26600**	11,89	**25000**	36,80	**25300**

For an overview of the ABS spare parts, take a look at **page 314**.

16

Torsional vibration dampers with ABS Connection

Scope of supply:
Base body with sealing disc

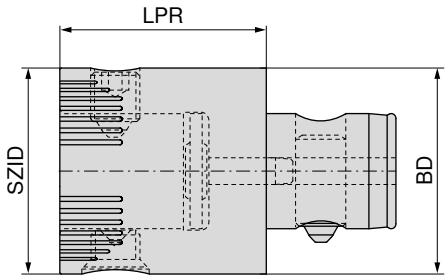

Adapter	KOMET no.	SZID	BD mm	LPR mm	84 216 ... EUR 3E	
ABS 50	A20 00651	ABS 50	50	50	725,60	**05097**
ABS 63	A20 00661	ABS 63	63	60	908,40	**06096**
ABS 80	A20 00670	ABS 80	80	70	908,40	**07092**

Clamping screw

Taper screw

Spare parts Adapter	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**

For an overview of the ABS spare parts, take a look at **page PL**.

Eccentric adjuster with ABS Connection

▲ Adjustment ± 0.25 mm on diameter

Scope of supply:

Eccentric adjuster with adjuster key Ø 2.8 mm

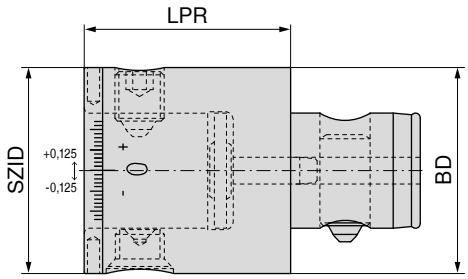

Adapter	KOMET no.	SZID	BD mm	LPR mm	84 217 ... EUR W4/6A	
ABS 50	A20 00620	ABS 50	50	50	618,20	**05097**
ABS 63	A20 00630	ABS 63	63	60	668,20	**06096**

Clamping screw

Taper screw

Spare parts Adapter	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**

For an overview of the ABS spare parts, take a look at **page 314**.

Damping element with ABS connection

- ▲ The specially mounted damping core enables perfect machining results even with longer tool overhangs
- ▲ Reduction in machining times due to optimum machining parameters
- ▲ Damped machining and therefore perfect surface qualities
- ▲ Protection of the machine spindle and increased tool service life

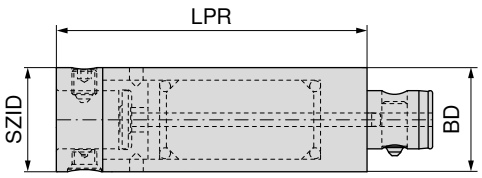

Adapter	KOMET no.	SZID	BD mm	LPR mm	RPMX 1/min.	84 218 ... EUR 3E	
ABS 40	A20 01240	ABS 40	40	120	8000	1.471,00	**12088**
ABS 50	A20 01250	ABS 50	50	150	6300	1.709,00	**15097**
ABS 63	A20 01260	ABS 63	63	190	5000	2.235,00	**19096**
ABS 80	A20 01270	ABS 80	80	240	4000	3.113,00	**24092**

Clamping screw

Taper screw

Spare parts Adapter	84 950 ... EUR XX		84 950 ... EUR XX	
ABS 40	13,47	**26900**	18,15	**27200**
ABS 50	15,74	**20300**	20,18	**20400**
ABS 63	17,32	**25500**	21,62	**27300**
ABS 80	19,61	**25600**	24,15	**25100**

For an overview of the ABS spare parts, take a look at **page 314**.

ABS reduction

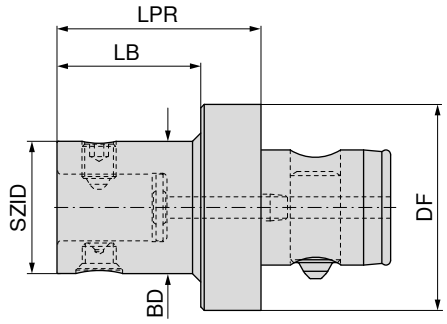



Adapter	KOMET no.	SZID	BD mm	DF mm	LPR mm	LB mm	84 219 ... EUR 3E	
ABS 32	A20 10120	ABS 25	25	32	40	30	332,80	**03290**
ABS 40	A20 10220	ABS 25	25	40	40	28	351,20	**04090**
ABS 40	A20 10230	ABS 32	32	40	40	28	351,20	**04089**
ABS 50	A20 10320	ABS 25	25	50	50	35	381,50	**05090**
ABS 50	A20 10330	ABS 32	32	50	50	35	381,50	**05089**
ABS 50	A20 10340	ABS 40	40	50	50	35	381,50	**05088**
ABS 63	A20 10420	ABS 25	25	63	60	40	427,40	**06390**
ABS 63	A20 10430	ABS 32	32	63	60	40	427,40	**06389**
ABS 63	A20 10440	ABS 40	40	63	60	40	427,40	**06388**
ABS 63	A20 10450	ABS 50	50	63	60	40	427,40	**06397**
ABS 80	A20 10530	ABS 32	32	80	60	35	505,10	**08089**
ABS 80	A20 10540	ABS 40	40	80	60	35	505,10	**08088**
ABS 80	A20 10550	ABS 50	50	80	60	35	505,10	**08097**
ABS 80	A20 10560	ABS 63	63	80	60	35	505,10	**08096**
ABS 100	A20 10650	ABS 50	50	100	80	50	551,20	**10097**
ABS 100	A20 10660	ABS 63	63	100	80	50	551,20	**10096**
ABS 100	A20 10670	ABS 80	80	100	80	50	551,20	**10092**
ABS 125	A20 10770	ABS 80	80	125	100	50	609,00	**12592**
ABS 125	A20 10780	ABS 100	100	125	100	50	609,00	**12591**

Spare parts SZID	Clamping screw 62 950 ... EUR XX		Clamping screw 84 950 ... EUR XX		Taper screw 84 950 ... EUR XX	
ABS 25			12,08	**26800**	17,70	**27000**
ABS 32	12,08	**13989**			17,70	**27100**
ABS 40			13,47	**26900**	18,15	**27200**
ABS 50			15,74	**20300**	20,18	**20400**
ABS 63			17,32	**25500**	21,62	**27300**
ABS 80			19,61	**25600**	24,15	**25100**
ABS 100			23,21	**25700**	25,41	**25200**

For an overview of the ABS spare parts, take a look at **page 314**.

16

Blank

▲ Connection area hardened and ground
▲ Dimension BD x dimension LB = unhardened area for further processing

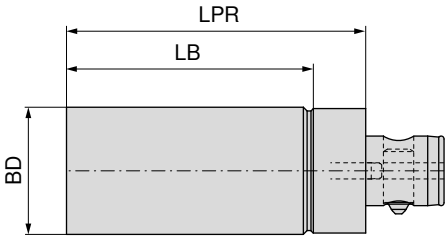

Adapter	KOMET no.	LPR mm	BD mm	LB mm	84 230 ... EUR W4/6A	
ABS 25	B10 01011	70	26	55	164,40	**02690**
ABS 32	B10 02011	80	33	65	173,30	**03389**
ABS 40	B10 03011	100	41	82	202,40	**04188**
ABS 50	B10 04011	120	51	99	197,30	**05197**
ABS 63	B10 05011	150	64	124	249,10	**06496**
ABS 80	B10 06011	180	81	145	385,80	**08192**
ABS 100	B10 07011	200	101	158	508,50	**10191**

For an overview of the ABS spare parts, take a look at **page 314**.

MonoClamp – HSK-T Blade Holder GX/LX/FX/SX

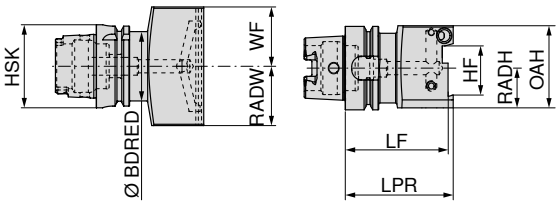

NEW
Direct Cooling
radial

74 586 ...

Adapter	LPR mm	LF mm	BDRED mm	WF mm	HF mm	OAH mm	RADW mm	RADH mm	for parting blades	EUR 2D/80	
HSK-T 63	84,0	80	52,6	45	26	62	45	30	XLCF N 26...	496,90	**02637**
HSK-T 63	85,5	80	52,6	45	32	68	45	34	XLCF N 32...	496,90	**03237**

MonoClamp – HSK-T Blade Holder GX/LX/FX/SX

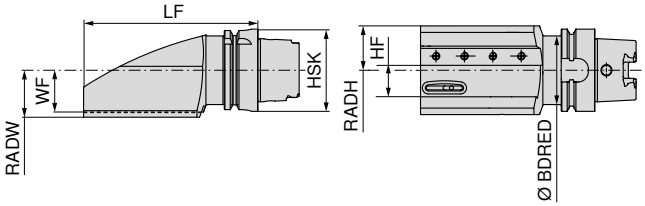

Illustrations show right-hand versions

NEW
Direct Cooling
Left-hand

74 585 ...

NEW
Direct Cooling
Right-hand

74 584 ...

Adapter	LF mm	BDRED mm	WF mm	HF mm	RADW mm	RADH mm	for parting blades	EUR 2D/80		EUR 2D/80	
HSK-T 63	155	52,6	32	26	36,0	34	XLCF R/L 26...	496,90	**02637**	496,90	**02637**
HSK-T 63	155	52,6	32	32	37,5	35	XLCF R/L 32...	496,90	**03237**	496,90	**03237**

O-Ring

O-Ring

Clamping wedge

clamping screw

70 950 ... | **70 950 ...** | **70 950 ...** | **70 950 ...**

Spare parts for parting blades		EUR 2A/28			EUR 2A/28		EUR 2A/28			EUR 2A/28	
XLCF R/L 26...	19x2,5	5,55	**293**	23x2,5	5,55	**292**	81,57	**860**	M6x12	2,86	**861**
XLCF R/L 32...	19x2,5	5,55	**293**	23x2,5	5,55	**292**	81,57	**860**	M6x12	2,86	**861**

16

HSK-T square shank adapter 0°

▲ Suitable for stationary tool holder HF = 20 / 25 / 32 mm
▲ These HF values can be achieved by removing the mounting adapter and clamping block

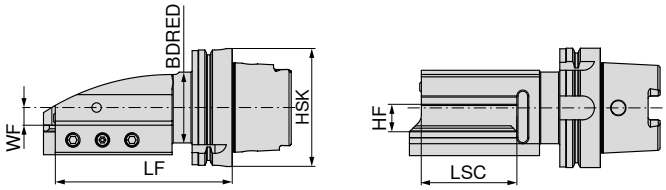

Illustrations show right-hand versions

NEW Direct Cooling — Left-hand — **74 571 ...**
NEW Direct Cooling — Right-hand — **74 570 ...**

Adapter	LF mm	BDRED mm	WF mm	LSC mm	HF mm	EUR 2D/80		EUR 2D/80	
HSK-T 63	145	52,6	15	80	20 / 25 / 32	388,50	**02537**	388,50	**02537**
HSK-T 100	150	60,0	15	80	20 / 25 / 32	513,00	**02535**	513,00	**02535**

HSK-T square shank adapter 45°

▲ Suitable for stationary tool holder HF = 20 / 25 / 32 mm
▲ These HF values can be achieved by removing the mounting adapter and clamping block

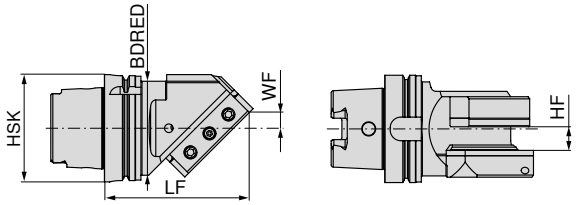

Illustrations show right-hand versions

NEW Direct Cooling — Left-hand — **74 573 ...**
NEW Direct Cooling — Right-hand — **74 572 ...**

Adapter	LF mm	BDRED mm	WF mm	HF mm	EUR 2D/80		EUR 2D/80	
HSK-T 63	130	52,6	14,6	20 / 25 / 32	388,50	**02537**	388,50	**02537**
HSK-T 100	135	87,6	14,6	20 / 25 / 32	528,00	**02535**	528,00	**02535**

HSK-T square shank adapter 90°

▲ Suitable for stationary tool holder HF = 20 / 25 / 32 mm
▲ These HF values can be achieved by removing the mounting adapter and clamping block

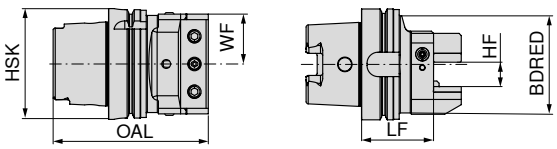

NEW Direct Cooling — Neutral — **74 575 ...**

Adapter	LF mm	BDRED mm	WF mm	OAL mm	HF mm	EUR 2D/80	
HSK-T 63	60	52,6	45	117	20 / 25 / 32	388,50	**02537**
HSK-T 100	65	87,6	45	140	20 / 25 / 32	513,00	**02535**

Spare parts HSK-T square shank holders with DirectCooling

Cylindrical screw

Clamping screw

			83 950 ...			62 950 ...	
Spare parts			EUR			EUR	
Adapter			Y7			W7/6B	
HSK-T 63	M5x5 - SW2,5	2,39	**157**	M12x16 - SW6	1,13	**51100**
HSK-T 100	M5x5 - SW2,5	2,39	**157**	M12x16 - SW6	1,13	**51100**

HSK-T square shank adapter 3-face 0°

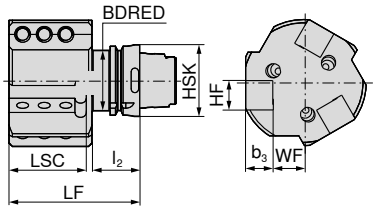

Left-hand

									74 576 ...	
ISO designation	Adapter	LF	l_2	BDRED	WF	LSC	b_3	HF	EUR	
		mm	mm	mm	mm	mm	mm	mm	2D/80	
HSK T63 SH3 L 00 2525	HSK-T 63	115	42	53	28	68	25	25	696,20	**525**
HSK T100 SH3 L 00 2525	HSK-T 100	120	45	88	33	70	25	25	987,00	**725**

Protection plugs

Nozzle

Hollow key with nose

Grubscrew

			70 950 ...			70 950 ...		70 950 ...			70 950 ...	
Spare parts		EUR			EUR			EUR			EUR	
Adapter		2A/28			2A/28			2A/28			2A/28	
HSK-T 63	UNJF 7/16"-20	26,06	**05600**	UNJF 7/16"-20	37,46	**05500**		57,91	**05700**	M12x1,75x25	2,09	**851**
HSK-T 100	UNJF 7/16"-20	26,06	**05600**	UNJF 7/16"-20	37,46	**05500**		57,91	**05700**	M12x1,75x25	2,09	**851**

HSK-T Boring bar holder



								74 577 ...	
ISO designation	Adapter	LPR	DCONWS	BD	LSC	LF	BTED	EUR	
		mm	mm	mm	mm	mm	mm	2D/80	
HSK T63 BH08 80	HSK-T 63	80	8	32	41			296,70	**508**
HSK T63 BH10 80	HSK-T 63	80	10	40	41			296,70	**510**
HSK T63 BH12 80	HSK-T 63	80	12	40	41			296,70	**512**
HSK T63 BH16 80	HSK-T 63	80	16	40	51			296,70	**516**
HSK T63 BH20 80	HSK-T 63	80	20	50	51			296,70	**520**
HSK T63 BH25 90	HSK-T 63	90	25	53	61			296,70	**525**
HSK T63 BH32 95	HSK-T 63	95	32	68	61	42	53	296,70	**532**
HSK T100 BH20 90	HSK-T 100	90	20	55	56			378,00	**720**
HSK T100 BH25 95	HSK-T 100	95	25	55	61			378,00	**725**
HSK T100 BH32 110	HSK-T 100	110	32	68	61			378,00	**732**
HSK T100 BH40 120	HSK-T 100	120	40	83	81			378,00	**740**
HSK T100 BH50 125	HSK-T 100	125	50	98	91	45	88	378,00	**750**

MonoClamp – PSC parting blade holder GX/LX/FX/SX with DirectCooling

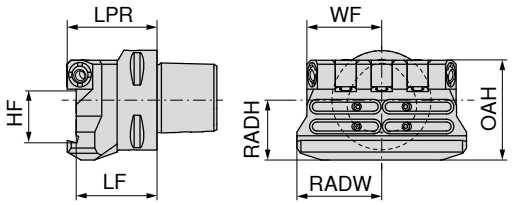

NEW
Direct Cooling
radial

Adapter	LF mm	LPR mm	WF mm	HF mm	OAH mm	RADW mm	RADH mm	for parting blades	84 617 ... EUR Y8	
PSC 40	40,5	45	37,5	26	50	42,5	30	XLCF N 26...	673,60	**62695**
PSC 50	40,5	45	37,5	26	50	42,5	30	XLCF N 26...	673,60	**62694**
PSC 63	45,5	50	40,0	32	57	45,0	35	XLCF N 32...	755,10	**63293**

MonoClamp – PSC parting blade holder GX/LX/FX/SX with DirectCooling

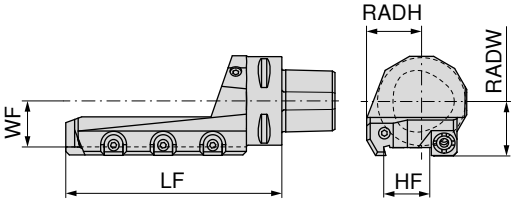

Diagrams show right hand versions

NEW
Direct Cooling
Left-hand

NEW
Direct Cooling
Right-hand

Adapter	LF mm	WF mm	HF mm	RADW mm	RADH mm	for parting blades	84 617 ... EUR Y8		84 617 ... EUR Y8	
PSC 40	122	21	26	25,5	31	XLCF N 26...	673,60	**32695**	673,60	**22695**
PSC 50	122	26	26	30,5	31	XLCF N 26...	673,60	**32694**	673,60	**22694**
PSC 63	160	32	32	36,5	37	XLCF N 32...	755,10	**33293**	755,10	**23293**

PSC square shank holder 0° with DirectCooling

▲ Suitable for tool holders with PSC 63 – HF = 20 / 25 mm / PSC 80 – HF = 25 mm
▲ These HF values can be achieved by removing the clamping block

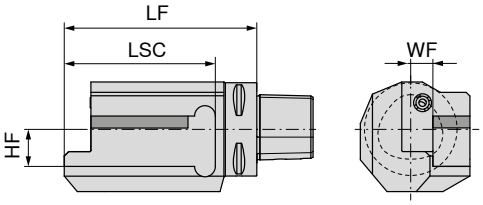

Diagrams show right hand versions

NEW
Direct Cooling
Left-hand

NEW
Direct Cooling
Right-hand

Adapter	LF mm	WF mm	LSC mm	HF mm	84 616 ... EUR Y8		84 616 ... EUR Y8	
PSC 63	130	15	102	20 / 25	505,70	**32593**	505,70	**22593**
PSC 80	130	20	102	25	564,10	**32586**	564,10	**22586**

PSC square shank holder 45° with DirectCooling

▲ Suitable for tool holders with PSC 50 – HF = 20 mm / PSC 63 – HF = 20 / 25 mm
▲ These HF values can be achieved by removing the clamping block

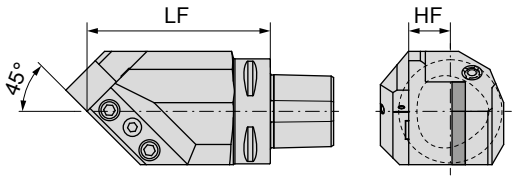

Diagrams show right hand versions

NEW Direct Cooling — Left-hand
NEW Direct Cooling — Right-hand

Adapter	LF mm	HF mm	84 616 ... EUR Y8		84 616 ... EUR Y8	
PSC 50	85	20	531,40	12094	531,40	02094
PSC 63	110	20 / 25	671,00	12593	671,00	02593

PSC square shank holder 90° with DirectCooling

▲ Suitable for tool holders with PSC 40 – HF = 20 mm / PSC 63 HF = 20 / 25 mm
▲ These HF values can be achieved by removing the clamping block

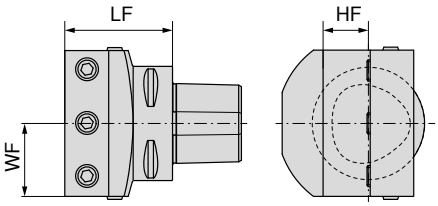

NEW Direct Cooling — Neutral

Adapter	LF mm	WF mm	HF mm	84 616 ... EUR Y8	
PSC 40	55	40	20	486,90	62095
PSC 63	71	40	20 / 25	505,70	62593

16

Radial parting blade holder, right / left

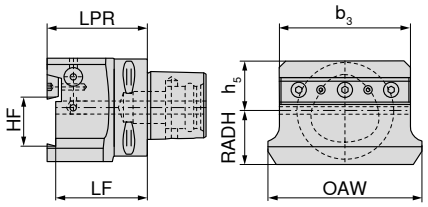



Neutral

84 132 ...

Adapter	HF	LPR	OAW	b_3	h_5	RADH	LF	EUR Y8	
	mm	mm	mm	mm	mm	mm	mm		
PSC 63	26	65	91	75	30	30	60	328,50	**626**
PSC 63	32	65	100	85	32	35	60	328,50	**632**

Square section adapter, single face

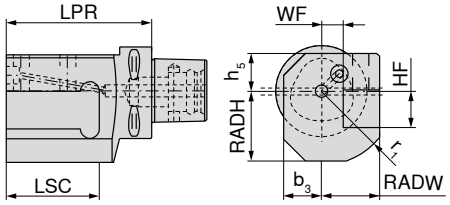

Illustrations show right-hand versions



Left-hand **84 611 ...**

Right-hand **84 610 ...**

Adapter	HF	LPR	b_3	RADW	r_1	WF	h_5	RADH	LSC	EUR Y8		EUR Y8	
	mm	mm	mm	mm	mm	mm	mm	mm	mm				
PSC 50	20	80	26	35	45	15	26	43	53	267,80	**520**	267,80	**520**
PSC 50	25	90	26	40	51	15	26	48	64	267,80	**525**	267,80	**525**
PSC 50	32	115	26	47	61	15	26	55	90	267,80	**532**	267,80	**532**
PSC 63	20	90	26	35	45	15	26	43	53	308,20	**620**	308,20	**620**
PSC 63	25	100	26	40	51	15	26	48	64	308,20	**625**	308,20	**625**
PSC 63	32	125	26	47	61	15	26	55	90	308,20	**632**	308,20	**632**
PSC 80	20	90	26	35	45	15	26	43	53	370,40	**820**	370,40	**820**
PSC 80	25	100	26	40	51	15	26	48	64	370,40	**825**	370,40	**825**
PSC 80	32	125	26	47	61	15	26	55	90	370,40	**832**	370,40	**832**

Radial square section tool holders 90°

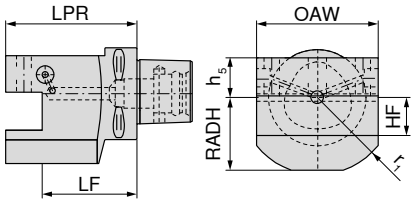



Neutral

84 602 ...

Adapter	HF	LPR	OAW	r_1	RADH	h_5	LF	EUR Y8	
	mm	mm	mm	mm	mm	mm	mm		
PSC 50	20	70	70	45	43	26	50	267,80	**520**
PSC 50	25	80	80	51	48	26	55	277,30	**525**
PSC 50	32	90	90	61	55	26	58	297,40	**532**
PSC 63	20	80	70	45	43	26	60	308,20	**620**
PSC 63	25	90	80	51	48	26	65	328,50	**625**
PSC 63	32	100	90	61	55	26	68	350,20	**632**
PSC 80	20	80	70	45	43	26	60	328,50	**820**
PSC 80	25	90	80	51	48	26	65	350,20	**825**
PSC 80	32	100	90	61	55	26	68	370,40	**832**

Square section adapter 45°

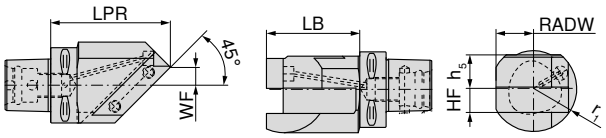



Illustrations show right-hand versions

Adapter	HF	LPR	RADW	r_1	WF	h_5	LB	Left-hand 84 605 ... EUR Y8		Right-hand 84 604 ... EUR Y8	
	mm	mm	mm	mm	mm	mm	mm				
PSC 50	20	100	31	36	15	26	80	267,80	**520**	267,80	**520**
PSC 63	20	100	32	36	15	28	78	319,10	**620**	319,10	**620**
PSC 80	32	135	45	70	17	40	105	359,80	**832**	359,80	**832**

Square section adapter, double face





Illustrations show right-hand versions

Adapter	HF	LPR	RADW	r_1	WF	LSC	Left-hand 84 613 ... EUR Y8		Right-hand 84 612 ... EUR Y8	
	mm	mm	mm	mm	mm	mm				
PSC 50	20	80	35	45	15	53	452,90	**520**	452,90	**520**
PSC 50	25	90	40	51	15	64	463,60	**525**	463,60	**525**
PSC 50	32	115	47	61	15	90	473,20	**532**	473,20	**532**
PSC 63	20	90	35	45	15	53	473,20	**620**	473,20	**620**
PSC 63	25	100	40	51	15	64	484,00	**625**	484,00	**625**
PSC 63	32	125	47	61	15	90	493,40	**632**	493,40	**632**
PSC 80	20	90	35	45	15	53	566,50	**820**	566,50	**820**
PSC 80	25	100	40	51	15	64	575,90	**825**	575,90	**825**
PSC 80	32	125	47	61	15	90	588,20	**832**	588,20	**832**

Square section adapter, triple face

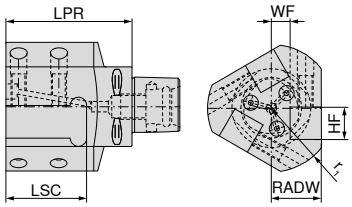



Illustrations show right-hand versions

Adapter	HF	LPR	RADW	r_1	WF	LSC	Left-hand 84 615 ... EUR Y8		Right-hand 84 614 ... EUR Y8	
	mm	mm	mm	mm	mm	mm				
PSC 50	20	80	35	45	15	53	607,00	**520**	607,00	**520**
PSC 50	25	90	40	51	15	64	617,90	**525**	617,90	**525**
PSC 50	32	115	47	61	15	90	638,30	**532**	638,30	**532**
PSC 63	20	90	35	45	15	53	711,10	**620**	711,10	**620**
PSC 63	25	100	40	51	15	64	742,10	**625**	742,10	**625**
PSC 63	32	125	47	61	15	90	762,40	**632**	762,40	**632**
PSC 80	20	90	35	45	15	53	854,40	**820**	854,40	**820**
PSC 80	25	100	40	51	15	64	876,10	**825**	876,10	**825**
PSC 80	32	125	47	61	15	90	896,40	**832**	896,40	**832**

Boring bar holder



Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	84 130 ... EUR Y8	
PSC 50	6	70	40	50	40	236,60	**506**
PSC 50	8	70	44	50	40	236,60	**508**
PSC 50	10	70	44	50	45	236,60	**510**
PSC 50	12	70	44	50	45	236,60	**512**
PSC 50	16	75	44	55	45	236,60	**516**
PSC 50	20	75	50	75	51	236,60	**520**
PSC 50	25	80	55	50	51	236,60	**525**
PSC 50	32	90	63	70	60	236,60	**532**
PSC 63	6	75	40	53	40	236,60	**606**
PSC 63	8	75	44	53	40	236,60	**608**
PSC 63	10	75	44	53	45	236,60	**610**
PSC 63	12	75	44	53	45	236,60	**612**
PSC 63	16	75	44	53	45	236,60	**616**
PSC 63	20	75	50	53	51	236,60	**620**
PSC 63	25	75	55	53	51	236,60	**625**
PSC 63	32	75	72	52	60	236,60	**632**
PSC 63	40	105	70	82	90	236,60	**640**

Grubscrew

Spare parts DCONWS		84 950 ... EUR Y8	
6	M6x16	4,96	**153**
8	M8x16	4,96	**154**
10	M10x16	4,96	**155**
12 - 40	M12x14	4,96	**156**

Boring bar adapter, split version

▲ vibration-damped
▲ ideally suited for large overhangs



Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	84 131 ... EUR Y8	
PSC 63	6	80	40	58	60	288,00	**606**
PSC 63	8	85	45	63	65	288,00	**608**
PSC 63	10	85	50	63	65	288,00	**610**
PSC 63	12	100	63	78	80	288,00	**612**
PSC 63	16	100	63	78	80	288,00	**616**
PSC 63	20	100	68	78	80	288,00	**620**
PSC 63	25	100	68	78	80	288,00	**625**
PSC 63	32	100	72	78	80	288,00	**632**

Grubscrew

Grubscrew

Spare parts DCONWS	83 950 ...	EUR Y8		84 950 ...	EUR Y8	
8	M6x20	2,66	**462**			
10				M6x16	4,96	**153**
12 - 20	M8x20	2,66	**468**			
25	M8x25	2,66	**467**			
32	M10x20	2,66	**471**			

Extension, axial clamping

▲ Run-out ≤ 0.002 mm
▲ max. speed 8,000 rpm

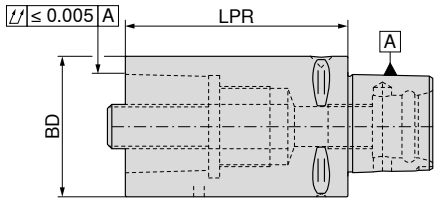

Adapter	BD mm	LPR mm	84 620 ... EUR Y8	
PSC 32	32	60	194,70	**301**
PSC 32	32	80	194,70	**302**
PSC 40	40	60	205,50	**401**
PSC 40	40	80	205,50	**402**
PSC 50	50	80	214,90	**501**
PSC 50	50	100	214,90	**502**
PSC 63	63	100	225,80	**601**
PSC 63	63	140	225,80	**602**
PSC 80	80	100	236,60	**801**
PSC 80	80	125	236,60	**802**

Threaded ring

tightening screw

Spare parts Adapter	84 950 ... EUR Y8			84 950 ... EUR Y8	
PSC 32	33,13	**127**	SW8	23,93	**122**
PSC 40	33,13	**128**	SW8	27,05	**123**
PSC 50	33,13	**129**	SW10	27,05	**124**
PSC 63	66,12	**130**	SW14	30,28	**126**
PSC 80	66,12	**130**	SW14	30,28	**126**

Accessories

Hollow nose keys

→ 204

Cylindrical reduction

▲ Run-out ≤ 0.002 mm
▲ max. speed 8,000 rpm

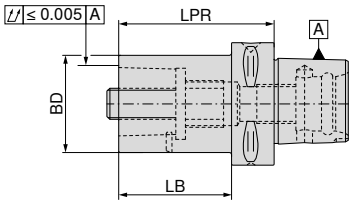

Adapter	BD mm	LPR mm	LB mm	84 624 ... EUR Y8	
PSC 40	32	55	35	185,30	**403**
PSC 50	32	60	40	205,50	**503**
PSC 50	40	65	45	205,50	**504**
PSC 63	32	70	48	214,90	**603**
PSC 63	40	80	58	214,90	**604**
PSC 63	50	80	58	214,90	**605**
PSC 80	32	60	30	225,80	**803**
PSC 80	40	70	40	225,80	**804**
PSC 80	50	80	50	225,80	**805**
PSC 80	63	80	50	225,80	**806**
PSC 80X	63	80	48	297,40	**816** 1)
PSC 80X	80	100	68	297,40	**818** 1)

1) PSC 80X = variant with enlarged flange diameter of 100 mm / standard flange diameter PSC 80 = 80 mm

Tapered reduction

▲ Run-out ≤ 0.002 mm
▲ max. speed 8,000 rpm

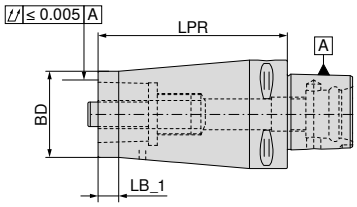

Adapter	BD mm	LPR mm	LB_1 mm	84 625 ... EUR Y8	
PSC 40	32	70	12	185,30	**403**
PSC 50	40	85	12	205,50	**504**
PSC 63	50	110	12	214,90	**605**
PSC 80	63	120	12	236,60	**806**
PSC 80X	80	150	12	297,40	**818** 1)

1) PSC 80X = variant with enlarged flange diameter of 100 mm / standard flange diameter PSC 80 = 80 mm

Threaded ring

tightening screw

Spare parts Adapter	84 950 ... EUR Y8			84 950 ... EUR Y8	
PSC 40	33,13	**128**	SW8	27,05	**123**
PSC 50	33,13	**129**	SW10	27,05	**124**
PSC 63	66,12	**130**	SW14	30,28	**126**
PSC 80	66,12	**130**	SW14	30,28	**126**
PSC 80X	66,12	**130**	SW14	30,28	**126**

Accessories

Hollow nose keys
→ 204

16

Sealing plugs





Adapter	BD mm	LPR mm	84 135 ... EUR Y8	
PSC 40	40	28	103,10	**040**
PSC 50	50	28	103,10	**050**
PSC 63	63	30	121,80	**060**
PSC 80	80	38	132,20	**080**

Hollow nose key for clamping screw for PSC extensions and reductions

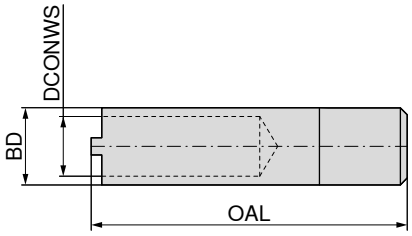

Adapter	BD mm	OAL mm	DCONWS mm	84 651 ... EUR Y8	
PSC 32	16	80	12,5	55,71	**032**
PSC 40	20	80	15,0	58,81	**040**
PSC 50	22	90	17,0	58,81	**050**
PSC 63/80/80X	34	110	21,0	64,89	**063**

Installation instructions: clamping screw for PSC extensions and reductions



X = Screw leading edge
Y = Threaded ring insertion depth

Adapter	X mm	Y mm
PSC 32	5	24
PSC 40	5	29
PSC 50	6	36
PSC 63	8	44
PSC 80	0	53
PSC 80X	0	53

Radial square section tool holder with DirectCooling – B1 / B2 / B3 / B4

- ▲ Double tooth profile for normal and overhead applications
- ▲ The clamping rails can be attached at the top or bottom (left or right application).
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

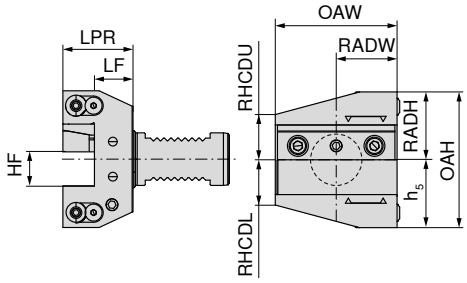

NEW

Direct Cooling

double

82 245 ...

Adapter	HF $_{0/-0,1}$ mm	LF $_{0/+0,5}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 20	16	16	30	55	30	30,0	30	60	22	22	252,80	**01629**
VDI 20	16	26	40	55	30	30,0	30	60	22	22	252,80	**51629**
VDI 25	16	16	30	55	30	30,0	30	60	22	22	252,80	**01628**
VDI 30	20	22	40	70	39	35,0	39	78	26	26	252,80	**02027**
VDI 40	25	22	44	85	47	42,5	47	94	33	33	298,30	**02526**
VDI 50	25	22	44	98	55	50,0	55	110	42	42	371,60	**02525**

Axial square section tool holder with DirectCooling – C1 / C2 / C3 / C4

- ▲ Double tooth profile for normal and overhead applications
- ▲ The clamping rails can be attached at the top or bottom (left or right application).
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

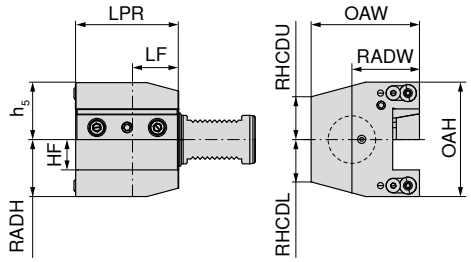

NEW

Direct Cooling

double

82 246 ...

Adapter	HF $_{0/-0,1}$ mm	LF mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 30	20	30	70	74	39	39,0	39	78	26	26	290,80	**02027**
VDI 40	25	30	85	94	47	52,5	47	94	35	35	346,40	**02526**
VDI 50	25	30	85	105	50	63,0	50	100	42	42	442,40	**02525**

You can find spare parts on → **Page 264+265**

16

Radial square section tool holder with DirectCooling – B1 / B4

▲ Double tooth profile for normal and overhead applications
▲ for turning tool holders with DirectCooling
▲ can be used up to 100 bar

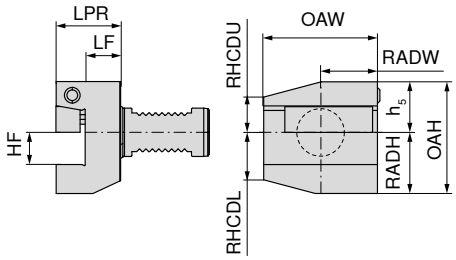

NEW

Direct Cooling

double

82 247 ...

Adapter	HF $_{0/-0,1}$ mm	LF $_{0/+0,5}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 30	20	22	40	70,0	38	35,0	31,5	69,5	29,5	22	194,60	**02027**
VDI 40	25	22	44	85,0	48	42,5	38,0	86,0	35,0	30	230,10	**02526**
VDI 50	25	22	44	92,5	48	50,0	43,0	91,0	43,0	30	285,60	**02525**

Radial square section tool holder with DirectCooling – B2 / B3

▲ Double tooth profile for normal and overhead applications
▲ for turning tool holders with DirectCooling
▲ can be used up to 100 bar

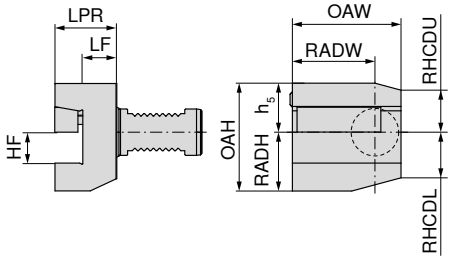

NEW

Direct Cooling

double

82 247 ...

Adapter	HF $_{0/-0,1}$ mm	LF $_{0/+0,5}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 30	20	22	40	70,0	38	35,0	31,5	69,5	29,5	27	194,60	**12027**
VDI 40	25	22	44	85,0	48	42,5	38,0	86,0	35,0	30	230,10	**12526**
VDI 50	25	22	44	92,5	48	50,0	43,0	91,0	35,0	38	285,60	**12525**

You can find spare parts on → **Page 264+265**

Axial square section tool holder with DirectCooling – C1 / C4

▲ Double tooth profile for normal and overhead applications
▲ for turning tool holders with DirectCooling
▲ can be used up to 100 bar

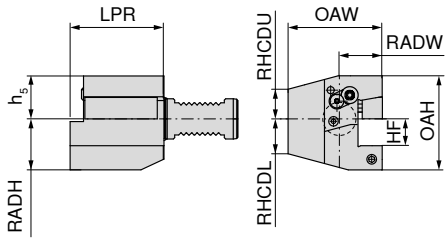

NEW

Direct Cooling

double

82 248 ...

Adapter	HF $_{0/-0,1}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 30	20	70	70,0	38	35,0	32	70	26	22	222,50	**02027**
VDI 40	25	85	85,0	48	42,5	38	86	35	30	265,50	**02526**
VDI 50	25	85	90,5	48	48,0	44	92	42	35	338,80	**02525**

Axial square section tool holder with DirectCooling – C2 / C3

▲ Double tooth profile for normal and overhead applications
▲ for turning tool holders with DirectCooling
▲ can be used up to 100 bar

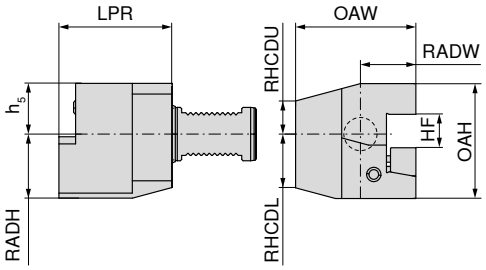

NEW

Direct Cooling

double

82 248 ...

Adapter	HF $_{0/-0,1}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 30	20	70	76	38	41,0	32	70	26	26	222,50	**12027**
VDI 40	25	85	90	48	47,5	38	86	35	30	265,50	**12526**
VDI 50	25	85	95	48	52,5	44	92	42	37	338,80	**12525**

You can find spare parts on → **Page 264+265**

Parting blade holder for parting blades with DirectCooling

▲ Double tooth profile for normal and overhead applications
▲ for parting blades with DirectCooling
▲ can be used up to 100 bar

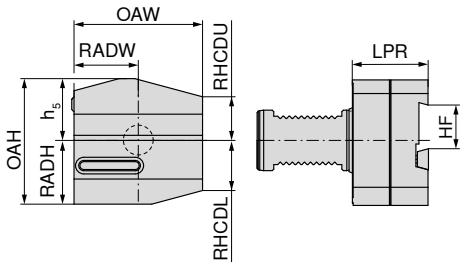

left

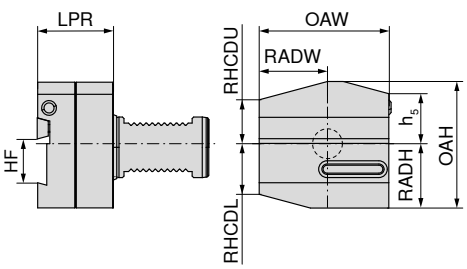

right



NEW Direct Cooling

NEW Direct Cooling

Adapter	HF mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	Left-hand 82 249 ... EUR Y8		Right-hand 82 249 ... EUR Y8	
VDI 30	26	50	70	37	35,0	32	69	30	25	488,00	**12627**	488,00	**02627**
VDI 40	32	50	85	40	42,5	43	83	31	31	548,60	**13226**	548,60	**03226**
VDI 40	26	50	85	40	42,5	43	83	31	31	548,60	**12626**	548,60	**02626**
VDI 50	32	50	100	45	50,0	43	88	37	35	654,70	**13225**	654,70	**03225**

You can find spare parts on → **Page 264+265**

Radial tool holders, short

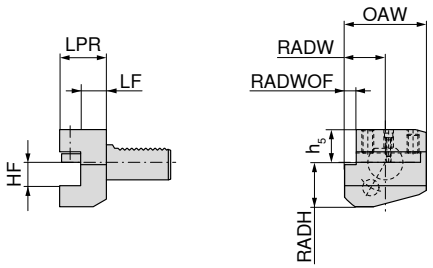

B2

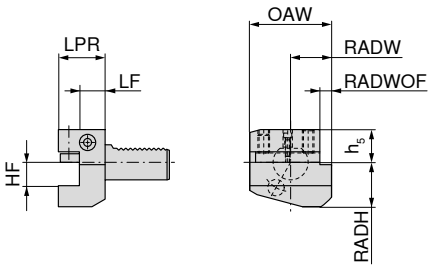

B1

B2

B1

Adapter	HF $_{0/-0,1}$ mm	OAW mm	RADW mm	RADWOF mm	h_5 mm	RADH mm	LF $_{0/+0,5}$ mm	LPR mm	Left-hand 82 189 ... EUR Y8		Right-hand 82 185 ... EUR Y8	
VDI 16	12	42	23,0	5,0	20,0	22	13,0	24	183,90	**160**	132,80	**160**
VDI 20	16	55	30,0	7,0	25,0	30	26,0	40	148,80	**201**	146,10	**201**
VDI 20	16	55	30,0	7,0	25,0	30	16,0	30	142,00	**200**	151,30	**200**
VDI 20	16	55	30,0	7,0	25,0	30	18,0	30	409,70	**202** 1)	458,30	**202** 1)
VDI 20	16	55	30,0	7,0	25,0	30	25,5	40			406,90	**203** 1)
VDI 30	20	70	35,0	10,0	28,0	38	18,5	40	152,80	**300**	137,80	**300**
VDI 30	20	70	35,0	10,0	28,0	38	42,0	60	192,00	**301**	181,30	**301**
VDI 30	20	70	35,0	10,0	28,0	35	32,0	50			853,20	**302** 1)
VDI 40	25	85	42,5	12,5	32,5	48	18,5	44	155,50	**400**	142,00	**400**
VDI 50	32	100	50,0	16,0	35,0	60	30,0	55	239,30	**500**	236,60	**500**

1) Height adjustable +/- 1 mm

Radial tool holders, overhead, short

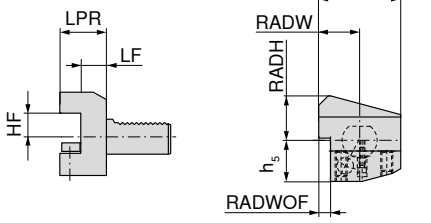

B4

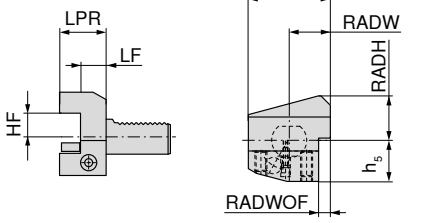

B3

B4

B3

Adapter	HF $_{0/-0,1}$ mm	OAW mm	RADW mm	RADWOF mm	h_5 mm	RADH mm	LF $_{0/+0,5}$ mm	LPR mm	Left-hand 82 196 ... EUR Y8		Right-hand 82 193 ... EUR Y8	
VDI 16	12	42	23,0	5,0	20,0	22	13,0	24			140,70	**160**
VDI 20	16	55	30,0	7,0	25,0	30	26,0	40	251,50	**201**	174,50	**201**
VDI 20	16	55	30,0	7,0	25,0	30	18,5	30	498,80	**202** 1)	497,60	**202** 1)
VDI 20	16	55	30,0	7,0	25,0	30	26,0	40	690,80	**203** 1)	443,40	**203** 1)
VDI 30	20	70	35,0	10,0	35,0	38	18,5	40	155,50	**300**	143,20	**300**
VDI 40	25	85	42,5	12,5	42,5	48	18,5	44	158,20	**400**	144,70	**400**
VDI 50	32	100	50,0	16,0	50,0	60	30,0	55	239,30	**500**	239,30	**500**

1) Height adjustable +/- 1 mm

You can find spare parts on → **Page 266**

Radial tool holders, long

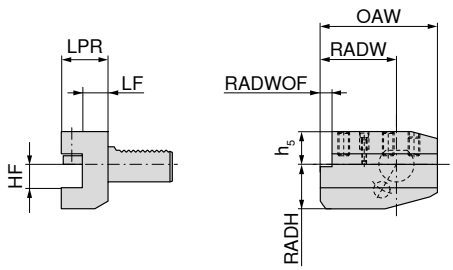

B6

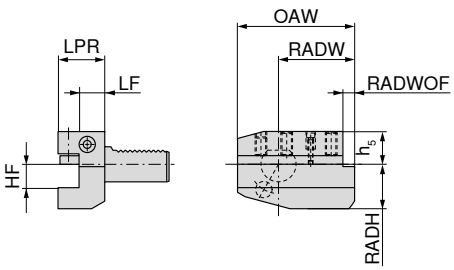

B5

B6

B5

Adapter	$HF_{0/-0,1}$ mm	OAW mm	RADW mm	RADWOF mm	h_5 mm	RADH mm	$LF_{0/+0,5}$ mm	LPR mm	Left-hand 82 202 ... EUR Y8		Right-hand 82 199 ... EUR Y8	
VDI 20	16	75	50,0	7,0	25,0	30	26,0	40	185,30	**201**	196,10	**201**
VDI 20	16	75	50,0	7,0	25,0	30	18,0	30			493,40	**202** [1]
VDI 30	20	100	65,0	10,0	28,0	38	18,5	40	178,50	**300**	173,00	**300**
VDI 40	25	118	75,5	12,5	32,5	48	18,5	44	175,70	**400**	179,80	**400**
VDI 50	32	130	80,0	16,0	35,0	60	30,0	55	270,40	**500**	278,50	**500**

1) Height adjustable +/- 1 mm

Radial tool holders, overhead, long

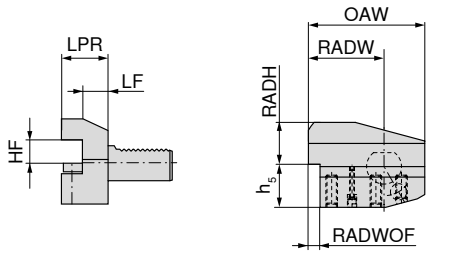

B8

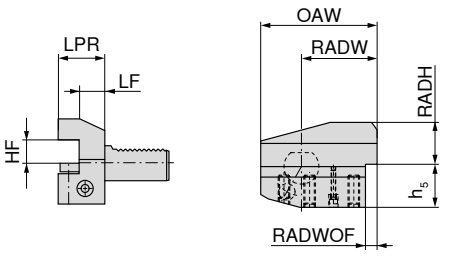

B7

B8

B7

Adapter	$HF_{0/-0,1}$ mm	OAW mm	RADW mm	RADWOF mm	h_5 mm	RADH mm	$LF_{0/+0,5}$ mm	LPR mm	Left-hand 82 208 ... EUR Y8		Right-hand 82 205 ... EUR Y8	
VDI 20	16	75	50,0	7,0	25,0	30	16,0	30	204,30	**200**	170,40	**200**
VDI 20	16	75	50,0	7,0	25,0	30	18,0	30			493,40	**202** [1]
VDI 30	20	100	65,0	10,0	35,0	38	42,0	60			209,70	**301**
VDI 30	20	100	65,0	10,0	35,0	38	18,5	40	158,20	**300**	178,50	**300**
VDI 40	25	118	75,5	12,5	42,5	48	18,5	44	178,50	**400**	179,80	**400**
VDI 50	32	130	80,0	16,0	50,0	60	30,0	55	250,10	**500**	283,90	**500**

1) Height adjustable +/- 1 mm

You can find spare parts on → **Page 266**

Axial tool holders

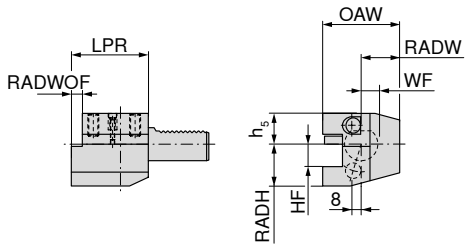

C2

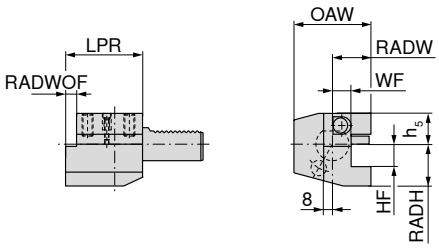

C1

C2

C1

Adapter	HF 0/-0,1 mm	OAW mm	RADW mm	WF 0/+0,3 mm	h_5 mm	RADH mm	LPR mm	Left-hand 82 214 ... EUR Y8		Right-hand 82 211 ... EUR Y8	
VDI 16	12	43	24,0	13,0	20,0	22	44			169,00	**160**
VDI 20	16	65	40,0	25,5	25,0	30	50			507,00	**202** [1]
VDI 20	16	65	40,0	26,0	25,0	30	50	174,50	**200**	178,50	**201**
VDI 30	20	76	41,0	23,0	28,0	38	70	171,70	**300**		
VDI 30	20	70	35,0	17,0	28,0	38	70			160,90	**300**
VDI 40	25	85	42,5	20,5	32,5	48	85			183,90	**400**
VDI 40	25	90	47,5	25,5	32,5	48	85	189,30	**400**		
VDI 50	32	105	55,0	30,5	35,0	60	100	289,30	**500**		
VDI 50	32	100	50,0	25,5	35,0	60	100			273,10	**500**

1) Height adjustable +/- 1 mm

Axial tool holders, overhead





C4





C3

C4

C3

Adapter	HF 0/-0,1 mm	OAW mm	RADW mm	WF 0/+0,3 mm	h_5 mm	RADH mm	LPR mm	Left-hand 82 220 ... EUR Y8		Right-hand 82 217 ... EUR Y8	
VDI 16	12	43	24,0	13,0	20,0	22	44			181,30	**160**
VDI 20	16	65	40,0	25,5	30,0	25	50			635,40	**202** [1]
VDI 20	16	65	40,0	26,0	25,0	30	50	185,30	**200**	197,40	**201**
VDI 20	16	65	40,0	25,5	25,0	30	50	601,70	**201** [1]		
VDI 30	20	70	35,0	17,0	35,0	38	70			164,90	**300**
VDI 30	20	76	41,0	23,0	35,0	38	70	171,70	**300**		
VDI 40	25	85	42,5	20,5	42,5	48	85			189,30	**400**
VDI 40	25	90	47,5	25,5	42,5	48	85	189,30	**400**		
VDI 50	32	100	50,0	25,5	50,0	60	100			277,30	**500**
VDI 50	32	105	55,0	30,5	50,0	60	100	236,60	**500**		

1) Height adjustable +/- 1 mm

You can find spare parts on → **Page 266**

Multiple tool holders

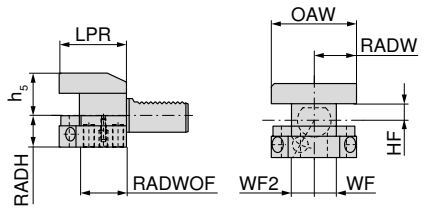

D2

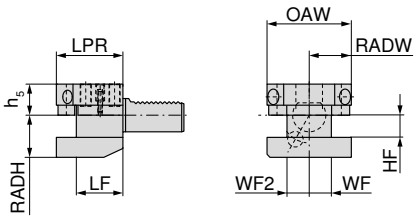

D1

D2 D1

Adapter	HF $_{0/-0,1}$ mm	RADW mm	WF $_{0/+0,3}$ mm	WF2 $_{0/+0,3}$ mm	OAW mm	h_5 mm	RADH mm	LF $_{0/+0,5}$ mm	LPR mm	82 224 ... EUR Y8		82 222 ... EUR Y8	
VDI 30	20	35,0	17,0	23,0	76	28,0	38	42	60			381,30	**300**
VDI 30	20	35,0	17,0	23,0	76	35,0	38	42	60	381,30	**300**		
VDI 40	25	42,5	20,5	25,5	90	32,5	48	50	72			401,40	**400**
VDI 40	25	42,5	20,5	25,5	90	42,5	48	50	72	401,40	**400**		

Cylindrical tool holders

▲ for tools with cylindircal shank to DIN 6535 and DIN 1835 Form E (Whistle Notch)
▲ Coolant supply either centrally through the tool or via the adjustable ball spray nozzles

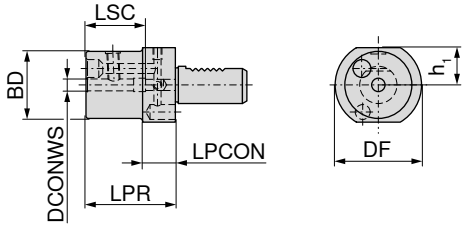

E

Cooling through nozzle

Adapter	DCONWS mm	DF mm	BD mm	h_1 mm	LPR mm	LPCON mm	LSC mm	83 269 ... EUR Y8	
VDI 20	6	50	45	23,0	60	22	40	175,70	**206**
VDI 20	8	50	45	23,0	60	22	40	169,00	**208**
VDI 20	10	50	45	23,0	60	22	44	169,00	**210**
VDI 20	12	50	45	23,0	60	22	49	169,00	**212**
VDI 20	14	50	45	23,0	62	22	49	169,00	**214**
VDI 20	16	50	45	23,0	67	22	52	163,60	**216**
VDI 20	18	50	45	23,0	67	22	52	163,60	**218**
VDI 20	20	50	45	23,0	67	22	52	163,60	**220**
VDI 30	6	68	52	28,0	67	22	35	183,90	**306**
VDI 30	8	68	52	28,0	67	22	35	174,50	**308**
VDI 30	10	68	52	28,0	67	22	39	174,50	**310**
VDI 30	12	68	52	28,0	67	22	44	174,50	**312**
VDI 30	14	68	52	28,0	67	22	44	174,50	**314**
VDI 30	16	68	52	28,0	67	22	47	169,00	**316**
VDI 30	18	68	52	28,0	67	22	47	174,50	**318**
VDI 30	20	68	52	28,0	67	22	52	169,00	**320**
VDI 40	6	83	52	32,5	67	22	35	204,30	**406**
VDI 40	8	83	52	32,5	67	22	35	197,40	**408**
VDI 40	10	83	52	32,5	67	22	39	197,40	**410**
VDI 40	12	83	52	32,5	67	22	44	197,40	**412**
VDI 40	14	83	52	32,5	67	22	44	197,40	**414**
VDI 40	16	83	52	32,5	67	22	47	190,60	**416**
VDI 40	18	83	52	32,5	67	22	47	190,60	**418**
VDI 40	20	83	52	32,5	67	22	52	190,60	**420**

Cylindrical tool holders for indexable insert drills

▲ for drilling tools with internal coolant supply

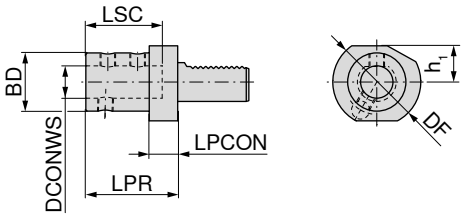

E1

AD

Adapter	DCONWS $_{H6}$ mm	DF mm	BD mm	h_1 mm	LPR mm	LPCON mm	LSC mm	82 274 ... EUR Y8	
VDI 20	16	50	36	23,0	67	18	54	134,40	**200**
VDI 20	20	50	40	23,0	67	18	54	134,40	**201**
VDI 20	25	50	45	23,0	71	18	59	134,40	**202**
VDI 30	16	68	36	28,0	67	22	54	124,60	**300**
VDI 30	20	68	40	28,0	67	22	54	124,60	**301**
VDI 30	25	68	45	28,0	71	22	59	124,60	**302**
VDI 30	32	68	52	28,0	75	22	63	124,60	**303**
VDI 30	40	68	60	28,0	87	22	73	134,00	**304**
VDI 40	16	83	36	32,5	67	22	54	142,00	**400**
VDI 40	20	83	40	32,5	67	22	54	142,00	**401**
VDI 40	25	83	45	32,5	75	22	59	142,00	**402**
VDI 40	32	83	52	32,5	75	22	63	142,00	**403**
VDI 40	40	83	60	32,5	90	22	73	142,00	**404**
VDI 50	20	98	40	35,0	80	30	54	194,90	**500**
VDI 50	25	98	45	35,0	80	30	59	198,70	**501**
VDI 50	32	98	52	35,0	80	30	63	198,70	**502**
VDI 50	40	98	60	35,0	90	30	73	198,70	**503**
VDI 50	50	98	70	35,0	100	30	83	146,10	**504**

You can find spare parts on → **Page 266**

Boring bar holder

▲ for turning tools with cylindrical shank
▲ Coolant supply either through the tool or via the ball-shaped spray nozzle





E2

Cooling through nozzle

Adapter	DCONWS $_{H7}$ mm	DF mm	BD mm	h_1 mm	LPR mm	LPCON mm	LSC mm	82 268 ... EUR Y8	
VDI 16	6	40	32	18,0	44	13	34	162,40	**160** [1]
VDI 16	8	40	32	18,0	44	13	34	137,80	**161** [1]
VDI 16	10	40	32	18,0	44	13	34	137,80	**162** [1]
VDI 16	12	40	40	18,0	44	13	34	137,80	**163** [1]
VDI 16	16	40	40	18,0	44	13	34	137,80	**164** [1]
VDI 20	8	50	40	23,0	50	18	41	144,70	**200**
VDI 20	10	50	40	23,0	50	18	41	144,70	**201**
VDI 20	12	50	40	23,0	50	18	41	144,70	**202**
VDI 20	16	50	40	23,0	50	18	41	144,70	**203**
VDI 20	20	50	50	23,0	50	18	41	144,70	**204**
VDI 20	25	50	50	23,0	60	18	51	144,70	**205**
VDI 30	8	68	55	28,0	60	22	51	142,00	**300**
VDI 30	10	68	55	28,0	60	22	51	142,00	**301**
VDI 30	12	68	55	28,0	60	22	51	142,00	**302**
VDI 30	16	68	55	28,0	60	22	51	142,00	**303**
VDI 30	20	68	55	28,0	60	22	51	142,00	**304**
VDI 30	25	68	55	28,0	60	22	51	142,00	**305**
VDI 30	32	68	68	28,0	75	22	61	142,00	**306**
VDI 40	8	83	55	32,5	75	22	61	144,70	**400**
VDI 40	10	83	55	32,5	75	22	61	144,70	**401**
VDI 40	12	83	55	32,5	75	22	61	144,70	**402**
VDI 40	16	83	55	32,5	75	22	61	144,70	**403**
VDI 40	20	83	55	32,5	75	22	61	144,70	**404**
VDI 40	25	83	55	32,5	75	22	61	144,70	**405**
VDI 40	32	83	83	32,5	75	22	61	144,70	**406**
VDI 40	40	83	83	32,5	90	22	76	144,70	**407**
VDI 50	12	98	68	35,0	90	30	76	206,80	**500**
VDI 50	16	98	68	35,0	90	30	76	206,80	**501**
VDI 50	20	98	68	35,0	90	30	76	206,80	**502**
VDI 50	25	98	68	35,0	90	30	76	197,40	**503**
VDI 50	32	98	68	35,0	90	30	76	197,40	**504**
VDI 50	40	98	98	35,0	90	30	76	197,40	**505**
VDI 50	50	98	98	35,0	100	30	86	197,40	**506**

1) Coolant supply through pipe joint

You can find spare parts on → **Page 266**

ER Collet chucks

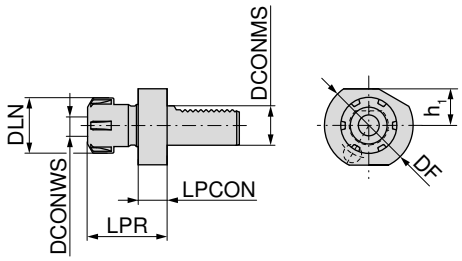

E4

Adapter	DCONWS mm	DF mm	DLN mm	h_1 mm	LPR mm	LPCON mm	for collet	82 286 ... EUR Y8	
VDI 16	1 - 10	40	28	18,0	43,5	14	426E (ER16)	194,70	**160**
VDI 16	1 - 13	40	34	18,0	44,0	14	428E (ER20)	192,00	**161**
VDI 20	1 - 16	50	42	23,0	57,0	18	430E (ER25)	196,10	**202**
VDI 20	2 - 20	50	50	23,0	62,0	18	470E (ER32)	201,40	**203**
VDI 30	1 - 16	68	42	28,0	57,0	22	430E (ER25)	174,50	**300**
VDI 30	2 - 20	68	50	28,0	75,0	22	470E (ER32)	178,50	**301**
VDI 40	1 - 16	83	42	32,5	75,0	22	430E (ER25)	197,40	**400**
VDI 40	2 - 20	83	50	32,5	75,0	22	470E (ER32)	197,40	**401**
VDI 40	3 - 26	83	63	32,5	75,0	22	472E (ER40)	204,30	**402**
VDI 50	2 - 20	94	50	35,0	75,0	30	470E (ER32)	300,20	**500**
VDI 50	3 - 26	94	63	35,0	63,0	30	472E (ER40)	300,20	**501**

ER collets can be found on → **Pages 268–279**.

Morse taper adapters

▲ For taper shanks with ejector tang

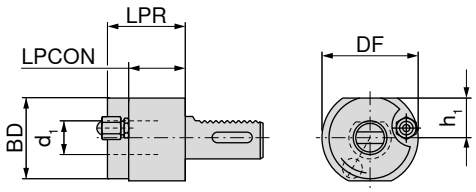

F1

Adapter	d_1	BD mm	DF mm	h_1 mm	LPR mm	LPCON mm	82 277 ... EUR Y8	
VDI 20	MK1		50	23,0	23		136,60	**200**
VDI 20	MK2		50	23,0	87		136,60	**201**
VDI 30	MK1		68	28,0	27		123,20	**300**
VDI 30	MK2		68	28,0	27		131,70	**301**
VDI 30	MK3	58	68	28,0	55	40	131,70	**302**
VDI 40	MK2	55	83	32,5	36	22	144,70	**401**
VDI 40	MK3	58	83	32,5	36	22	144,70	**402**
VDI 40	MK4	68	83	32,5	80	22	144,70	**403**
VDI 50	MK2	55	98	35,0	36	30	220,30	**500**
VDI 50	MK3	58	98	35,0	36	30	220,30	**501**
VDI 50	MK4	68	98	35,0	50	30	220,30	**502**

Parting blade holders, height adjustable

▲ Vertical adjustment ± 1 mm
▲ Suitable for internal cooling through the parting blade (DC)
▲ axially parallel, adjustable external coolant supply

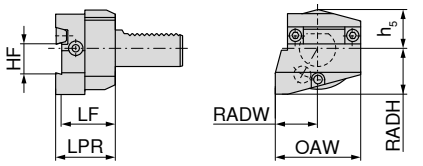

left

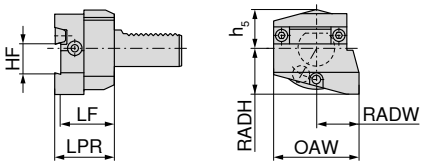

right



Adapter	OAW mm	RADW mm	HF mm	h_5 mm	RADH mm	LF mm	LPR mm	Left-hand 82 237 ... EUR Y8		Right-hand 82 236 ... EUR Y8	
VDI 30	70	35,0	26	28,0	38	44	49	415,10	**300**	415,10	**300**
VDI 30	70	35,0	32	30,5	38	44	49	488,20	**302**	488,20	**302**
VDI 40	73	42,5	26	32,0	48	44	49	505,70	**040**	505,70	**040**
VDI 40	85	42,5	32	32,0	48	44	49	419,20	**400**	419,20	**400**

Parting blade holders, height adjustable, overhead

▲ Vertical adjustment ± 1 mm
▲ Suitable for internal cooling through the parting blade (DC)
▲ axially parallel, adjustable external coolant supply

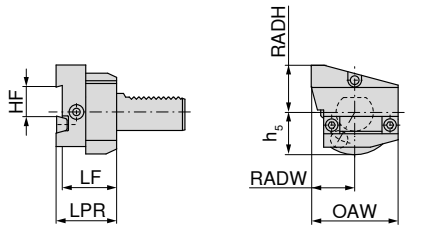

left

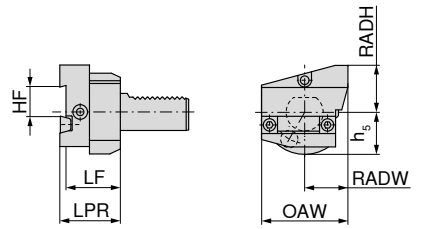

right

Adapter	OAW mm	RADW mm	HF mm	h_5 mm	RADH mm	LF mm	LPR mm	Left-hand 82 243 ... EUR Y8		Right-hand 82 242 ... EUR Y8	
VDI 30	70	35,0	26	34,0	38	44	49	555,60	**300**	555,60	**300**
VDI 30	70	35,0	32	30,5	38	44	49	488,20	**302**	488,20	**302**
VDI 40	73	42,5	26	32,0	48	44	49	505,70	**040**	505,70	**040**
VDI 40	85	42,5	32	32,0	48	44	49	419,20	**400**	419,20	**400**

Parting blade holders, height adjustable

▲ Vertical adjustment ± 1 mm
▲ Suitable for internal cooling through the parting blade (DC)
▲ axially parallel, adjustable external coolant supply

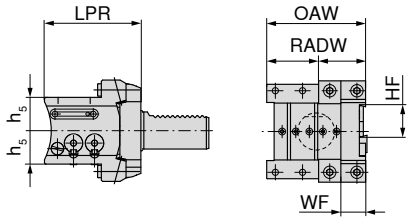

Universal-overhead

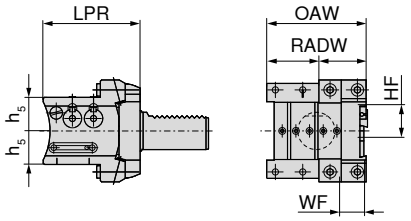

Universal

Adapter	OAW mm	RADW mm	HF mm	h_5 mm	WF mm	LPR mm	Universal-overhead 82 244 ... EUR Y8		Universal 82 238 ... EUR Y8	
VDI 30	80	40	26	27	20	78	777,30	**300**	777,30	**300**
VDI 40	80	40	26	27	20	88	862,60	**400**	862,60	**400**
VDI 40	80	40	32	32	20	88	862,60	**402**	862,60	**402**

Parting blade holder

▲ doubles = reciprocally interlocked VDI shank

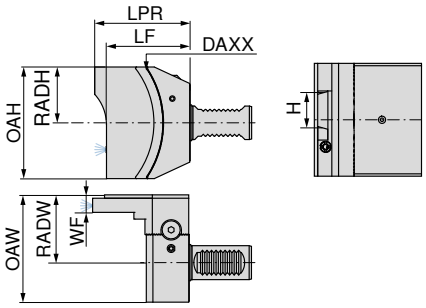

double – overhead

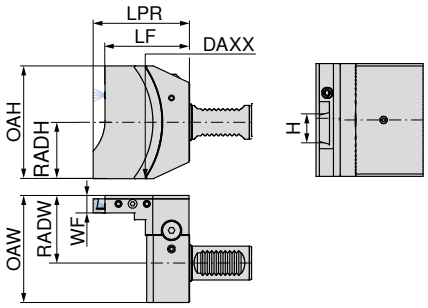

double



Adapter	LPR mm	LF mm	OAH mm	RADH mm	OAW mm	RADW mm	WF mm	DAXX mm	H mm	double – overhead 83 227 ... EUR Y7		double 83 226 ... EUR Y7	
VDI 20	85,5	75	94	47	85	60	15,5	176	26	617,70	**02629**[1)]	617,70	**02629**[1)]
VDI 30	85,5	75	100	50	95	60	15,5	176	32	661,30	**03227**[1)]	661,30	**03227**[1)]
VDI 30	85,5	75	100	50	95	60	15,5	176	26	661,30	**02627**[1)]	661,30	**02627**[1)]
VDI 40	88,5	78	100	50	95	60	15,5	176	32	712,70	**03226**[1)]	712,70	**03226**[1)]
VDI 40	88,5	78	100	50	95	60	15,5	176	26	712,70	**02626**[1)]	712,70	**02626**[1)]

1) Not ex-stock

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Short drill chuck – NC 2010

▲ Coolant supply via 3 adjustable ball-shaped spray nozzles in the housing
▲ Independent of direction of rotation

Scope of supply:
Basic body including chuck key SW 4

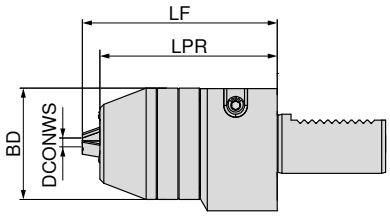

Adapter	DCONWS mm	BD mm	LPR mm	LF mm	EUR Y8	84 297 ...
VDI 20	0,5 - 10	48,5	40	50	389,40	**210** [1]
VDI 30	0,5 - 13	56,5	90	99	389,40	**313**
VDI 30	2,5 - 16	56,5	90	99	416,40	**316**
VDI 40	0,5 - 13	56,5	90	99	397,60	**413**
VDI 40	2,5 - 16	56,5	90	99	423,30	**416**

1) Without Through Coolant

Quick-change tap chucks GSF

▲ LZD = Length compensation under tension and compression

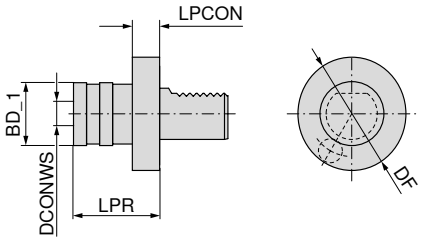

Adapter	cutting range	SZID	DCONWS mm	BD_1 mm	LPR mm	LZD± mm	83 307 ... EUR Y8	
VDI 20	M3 - M12	01	19	38	55	9	432,30	**112**
VDI 30	M3 - M12	01	19	38	55	9	331,70	**312**
VDI 40	M3 - M12	01	19	38	55	9	371,30	**412**
VDI 20	M6 - M20	02	31	55	77	15	473,50	**120**
VDI 30	M6 - M20	02	31	55	77	15	439,00	**320**
VDI 40	M6 - M20	02	31	55	77	15	458,90	**420**

Quick change adapters can be found on → **Page 288–292**.

HyTens – Turn

▲ Hydraulic chuck
▲ For the hydraulic clamping of cylindrical tool shanks tol. h6, boring bars and cylindrical tool holders tol. h7, g6 in fixed base holders
▲ One screw for locking the boring bar
▲ High-precision clamping with a repeatability of 3 µm

Scope of supply:
Base body with backstop screw and pressure screw

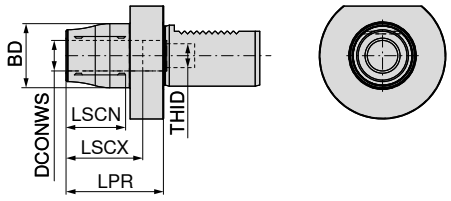



AD

Adapter	DCONWS mm	BD mm	LPR mm	LSCX mm	LSCN mm	THID	83 402 ... EUR Y8	
VDI 30	20	42	64	51	41	M16x1	533,60	**02027**
VDI 40	20	42	64	51	41	M16x1	557,40	**02026**

Stop screw IK

Spare parts DCONWS		83 950 ... EUR Y7	
20	M16x1x31 - SW5	17,62	**48700**

Test arbors

▲ Radial run-out ≤ 0.02 mm

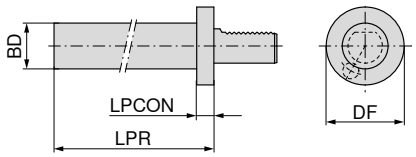

Adapter	BD h5 mm	DF mm	LPR mm	LPCON mm	83 324 ... EUR Y8	
VDI 16	30	40	120	15	249,40	**016**
VDI 20	40	50	150	15	273,20	**020**
VDI 30	40	68	200	15	291,80	**030**
VDI 40	40	83	200	15	310,40	**040**
VDI 50	40	98	200	15	339,60	**050**

Tool holders, rough machined, round

▲ Manufactured from C45

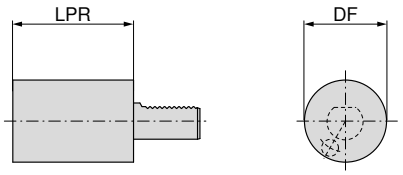

A2

Adapter	LPR mm	DF mm	82 330 ... EUR Y8	
VDI 16	60	40	96,27	**160**
VDI 20	70	50	77,57	**200**
VDI 30	100	68	88,58	**300**
VDI 30	240	68	105,40	**303**
VDI 40	120	83	101,40	**400**
VDI 40	320	83	152,50	**403**
VDI 50	135	98	149,90	**500**
VDI 50	400	98	242,80	**502**

Boring bar holder, with offset, with through coolant

▲ doubles = reciprocally interlocked VDI shank
▲ external coolant supply available

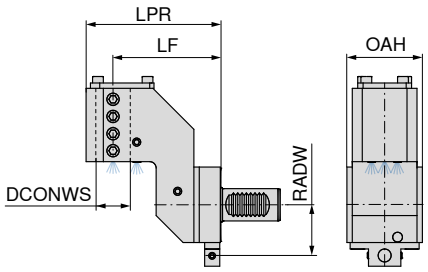



IC

double

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm	83 229 ... EUR Y7	
VDI 25	25	99.5	75	30	40	749,40	**02528**[1)]
VDI 30	32	125.0	100	70	47	743,40	**03227**[1)]
VDI 40	40	133.0	100	85	56	804,70	**04026**[1)]

1) Not ex-stock

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Double boring bar holder with through coolant

▲ for use of two boring bars for main and sub-spindle machining
▲ external coolant supply available

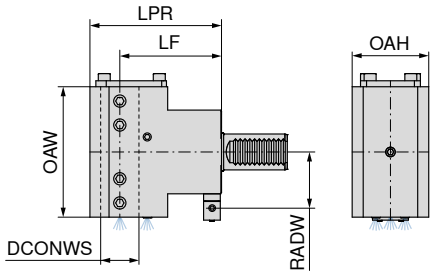



IC

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm	OAW mm	83 230 ... EUR Y7	
VDI 25	25	99.5	75	54	40	104	701,80	**02528**[1)]
VDI 30	32	110.0	85	62	47	109	625,00	**03227**[1)]
VDI 30	32	125.0	100	62	47	118	743,40	**13227**[1)]
VDI 40	40	152.0	120	76	56	116	872,30	**04026**[1)]

1) Not ex-stock

16

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Boring bar holder with through coolant

▲ external coolant supply available

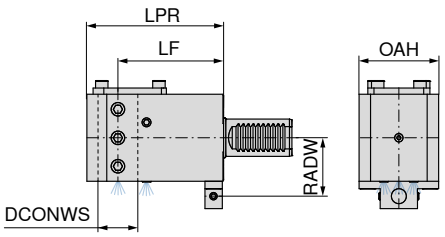



IC

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm	83 228 ... EUR Y7	
VDI 25	25	100	75	60	40	523,70	**02528**[1)]
VDI 30	32	110	85	64	47	569,90	**03227**[1)]
VDI 30	32	125	100	64	47	582,20	**13227**[1)]
VDI 40	40	130	100	76	56	614,30	**04026**[1)]
VDI 40	40	152	120	76	56	663,40	**14026**[1)]
VDI 50	50	155	120	98	64	898,50	**05025**[1)]

1) Not ex-stock

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

90° VDI to VDI adapter, double sided

▲ for rotating toolholder

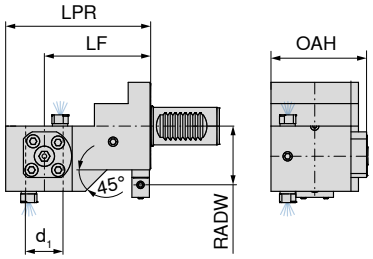

IC

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm	83 225 ... EUR Y7	
VDI 25	25	104	75	38.0	40	586,10	**02528**[1)]
VDI 25	20	104	75	67.5	40	586,10	**02028**[1)]
VDI 30	30	116	85	76.5	47	564,90	**03027**[1)]
VDI 30	30	131	100	76.5	47	641,80	**13027**[1)]
VDI 40	40	133	100	89.0	56	839,10	**04026**[1)]
VDI 40	40	153	120	89.0	56	700,50	**14026**[1)]

1) Not ex-stock

90° VDI to PSC adapter

Scope of supply:
including pull stud

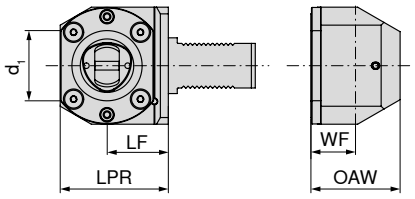

Adapter	d_1	LF mm	LPR mm	WF mm	OAW mm	90° 83 231 ... EUR Y7	
VDI 30	PSC 40	41	65	21	56	761,50	**04027**[1)]
VDI 40	PSC 40	51	75	30	86	761,50	**04026**[1)]
VDI 40	PSC 50	53	85	40	80	795,70	**05026**[1)]
VDI 40	PSC 63	53	95	40	80	838,40	**06326**[1)]
VDI 50	PSC 50	53	85	40	80	795,70	**05025**[1)]
VDI 50	PSC 63	55	97	40	80	838,40	**06325**[1)]

1) Not ex-stock

VDI to PSC adapter

Scope of supply:
including pull stud

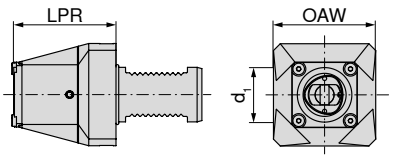

Adapter	d_1	LPR mm	OAW mm	83 232 ... EUR Y7	
VDI 30	PSC 40	70	60	761,50	**04027**[1)]
VDI 40	PSC 40	75	75	761,50	**04026**[1)]
VDI 40	PSC 50	85	82	795,70	**05026**[1)]
VDI 40	PSC 63	90	105	838,40	**06326**[1)]
VDI 50	PSC 50	85	91	795,70	**05025**[1)]
VDI 50	PSC 63	100	105	838,40	**06325**[1)]

1) Not ex-stock

Accessories

Pull stud PSC
→ 176

90° VDI to HSK-T adapter

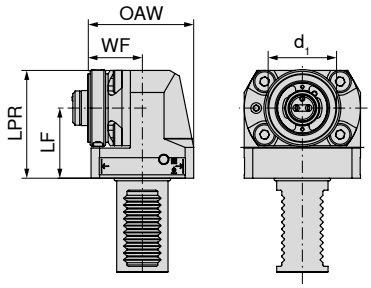

90°

Adapter	d_1	LF mm	LPR mm	WF mm	OAW mm	83 233 ... EUR Y7	
VDI 30	HSK-T 40	41	65	25	60	761,50	**04027**[1)]
VDI 40	HSK-T 40	51	75	34	90	761,50	**04026**[1)]
VDI 40	HSK-T 63	53	90	45	85	838,40	**06326**[1)]
VDI 50	HSK-T 63	55	97	45	85	838,40	**06325**[1)]

1) Not ex-stock

VDI to HSK-T adapter

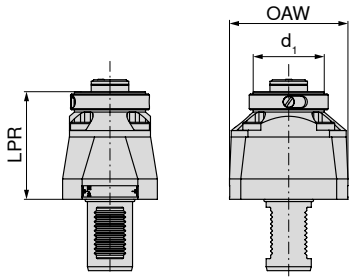

Adapter	d_1	LPR mm	OAW mm	83 234 ... EUR Y7	
VDI 30	HSK-T 40	74	60	761,50	**04027**[1)]
VDI 40	HSK-T 40	79	75	761,50	**04026**[1)]
VDI 40	HSK-T 63	95	105	838,40	**06326**[1)]
VDI 50	HSK-T 63	105	105	838,40	**06325**[1)]

1) Not ex-stock

Bar pullers for disc turrets, radial

▲ Two adjustable, spring-mounted, replaceable grippers are fitted to the main body. Each of these is equipped with a carbide insert. The grippers are set to a slightly smaller diameter than the bar and then pressed onto the bar in an axial direction (x axis) by the tool turret.
▲ GA = Gripper set

Scope of supply:
Bar puller incl. GA 1 for VDI 16, and GA 3 from VDI 20

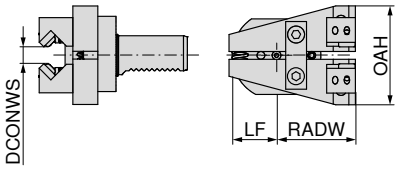

left

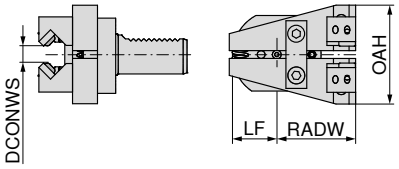

right



Adapter	DCONWS mm	LF mm	OAH mm	RADW mm	GA	Left-hand 80 309 ... EUR Y7		Right-hand 80 306 ... EUR Y7	
VDI 16	2 - 22	28	74	35	1			1.110,00	**01600**
VDI 20	2 - 42	34	85	61	3			1.333,00	**02000**
VDI 30	2 - 42	34	105	61	3 - 4	1.333,00	**03000**	1.333,00	**03000**
VDI 40	2 - 65	34	125	61	3 - 4	1.839,00	**04000**	1.839,00	**04000**

Bar pullers for star turrets

▲ Two adjustable, spring-mounted, replaceable grippers are fitted to the main body. Each of these is equipped with a carbide insert. The grippers are set to a slightly smaller diameter than the bar and then pressed onto the bar in an axial direction (x axis) by the tool turret.
▲ 90° angle head
▲ GA = Gripper set

Scope of supply:
Bar puller with GA 3

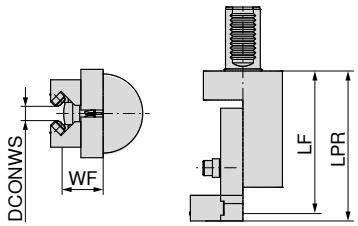

Adapter	DCONWS mm	LF mm	LPR mm	WF mm	GA	Left-hand 80 310 ... EUR Y7	
VDI 30	2 - 42	122,5	129	37,0	3 - 4	1.464,00	**03000**
VDI 40	2 - 65	142,5	149	41,5	3 - 4	1.923,00	**04000**

Gripper accessories

▲ For bar pullers 80 306 ... / 80 309 ... / 80 310 ...
▲ Price per pair



GA	DCONWS mm	OAL mm	OAW mm	OAH mm	80 312 ... EUR Y7	
1	2 - 22	24,5	13	58	250,10	12200
3	2 - 42	26,0	22	86	250,10	14200
4	42 - 65	29,5	22	102	331,20	16500

Protection plugs

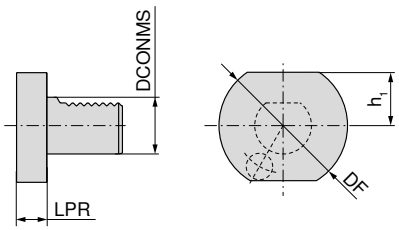

Steel

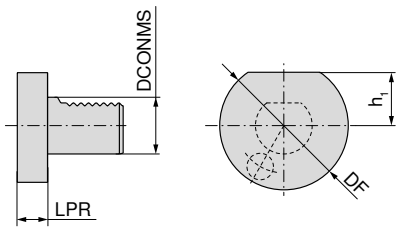

Plastic

Z2

Z2

DCONMS h8 mm	DF mm	h_1 mm	LPR mm	Steel 82 317 ... EUR Y8		Plastic 83 318 ... EUR Y8	
16	40	18,0	16	34,08	160	25,46	160
20	50	23,0	16	31,96	200	10,24	200
30	68	28,0	16	31,55	300	10,49	300
40	83	32,5	20	40,04	400	11,88	400
50	98	35,0	20	40,04	500	17,12	500

Doosan/Spinner – BMT 45 – Axial square section tool holder

▲ directly screwed version

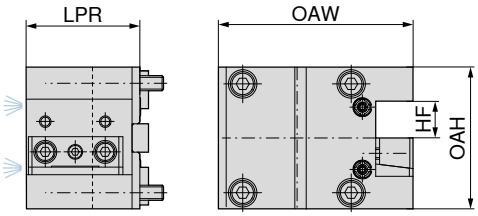



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 480 ... EUR Y7		Left-hand 82 480 ... EUR Y7	
BMT 45	58 x 58	20	60	75	99,5	405,30	**00001**	404,20	**00006**

Doosan/Spinner – BMT 45 – Radial square section tool holder

▲ directly screwed version

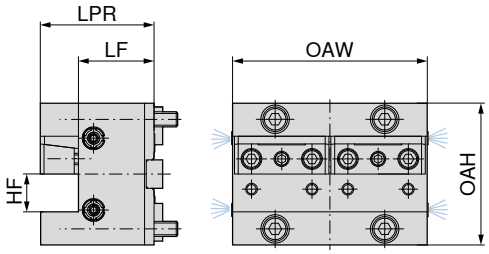

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 480 ... EUR Y7		Left-hand 82 480 ... EUR Y7	
BMT 45	58 x 58	20	40	60	75	103	426,00	**01002**		
BMT 45	58 x 58	20	40	60	75	80			425,30	**01007**

Doosan/Spinner – BMT 45 – Multi square section tool holder

▲ directly screwed version

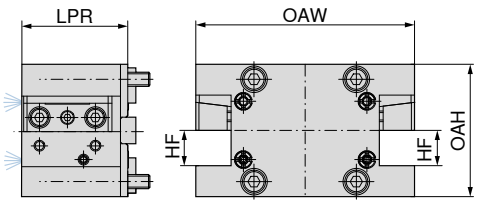



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	82 480 ... EUR Y7		82 480 ... EUR Y7	
BMT 45	58 x 58	20	60	75	124	563,50	**02003**	565,10	**02008**

Doosan/Spinner – BMT 45 – Combi tool holder

▲ directly screwed version

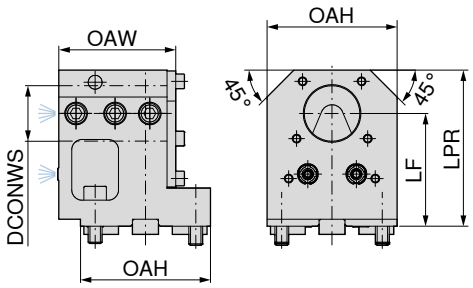



IC

Adapter	Hole pattern	DCONWS mm	LF mm	OAW mm	OAH mm	LPR mm	82 480 ... EUR Y7	
BMT 45	58 x 58	32	65	67,5	75	90	433,10	**03004**
BMT 45	58 x 58	32	85	67,5	75	110	732,90	**03005**

Doosan – BMT 55 – Axial square section tool holder

▲ directly screwed version

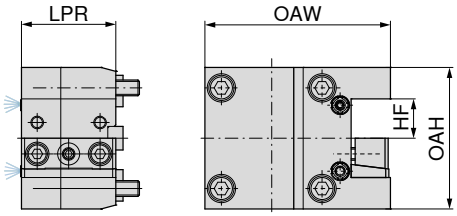



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 481 ... EUR Y7		Left-hand 82 481 ... EUR Y7	
BMT 55	64 x 64	25	60	90	118	439,70	**00001**	507,30	**00005**

Doosan – BMT 55 – Radial square section tool holder

▲ directly screwed version

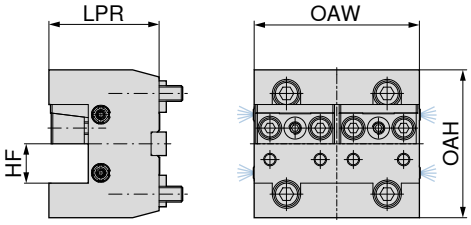



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 481 ... EUR Y7		Left-hand 82 481 ... EUR Y7	
BMT 55	64 x 64	25	70	94	105	439,70	**01002**		
BMT 55	64 x 64	25	95	94	105			724,90	**01006**

Doosan – BMT 55 – Multi square section tool holder

▲ directly screwed version

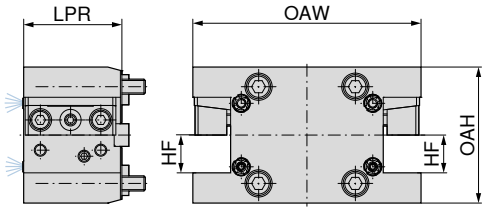

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	82 481 ... EUR Y7		82 481 ... EUR Y7	
BMT 55	64 x 64	25	65	90	151	641,40	**02003**		
BMT 55	64 x 64	25	60	90	151			713,10	**02007**

Doosan – BMT 55 – Boring bar holder

▲ directly screwed version

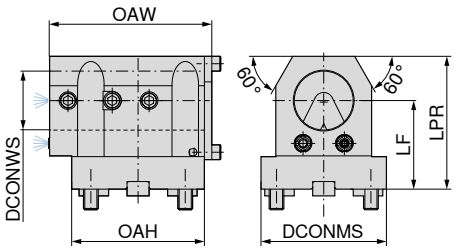

IC

Adapter	Hole pattern	DCONWS mm	LF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	82 481 ... EUR Y7	
BMT55	64 x 64	40	60	85	90	90	110	433,10	**04004**

EMAG – BMT 55 –
Axial square section tool holder

▲ directly screwed version

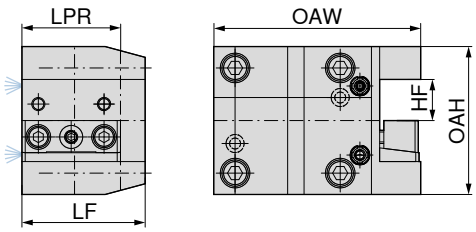



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	LF mm	OAH mm	OAW mm	Left-hand 82 482 ... EUR Y7		Left-hand 82 482 ... EUR Y7	
BMT 55	64 X 64	25	60	75	90	126	429,30	**00001**	496,60	**00004**

EMAG – BMT 55 –
Radial square section tool holder

▲ directly screwed version

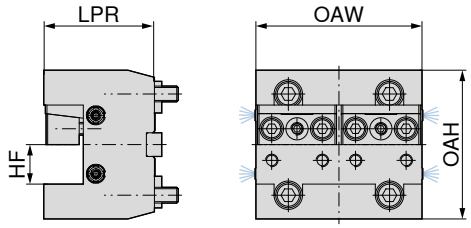



IC

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 482 ... EUR Y7	
BMT 55	64 x 64	25	70	94	105	439,70	**01002**

16

EMAG – BMT 55 – Boring bar holder

▲ directly screwed version

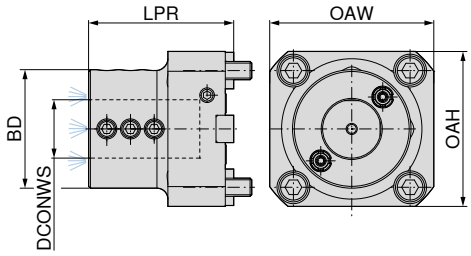

IC

Adapter	Hole pattern	DCONWS mm	BD mm	LPR mm	OAW mm	OAH mm	82 482 ... EUR Y7	
BMT55	64 x 64	32	65	75	85	90	524,80	**04003**

HAAS/Doosan – BMT 65 – Axial square section tool holder

▲ directly screwed version

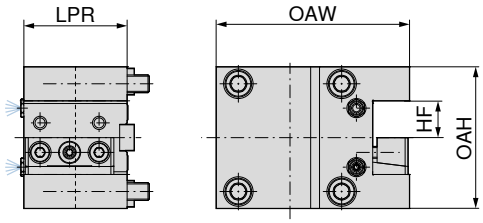



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 483 ... EUR Y7		Left-hand 82 483 ... EUR Y7	
BMT 65	70 x 73	25	70	96	131	691,90	**00001**		
BMT 65	70 x 73	25	75	97	131			605,90	**00005**

HAAS/Doosan – BMT 65 – Radial square section tool holder

▲ directly screwed version

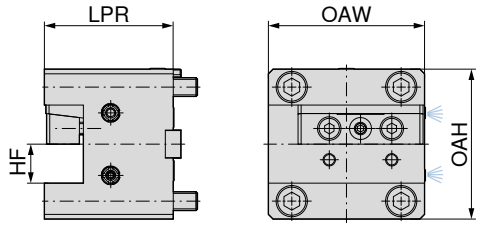

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Right-hand 82 483 ... EUR Y7		Right-hand 82 483 ... EUR Y7	
BMT 65	70 x 73	25	82,5	96	100	522,30	**05002**	591,50	**05006**

16

HAAS/Doosan – BMT 65 – Multi square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

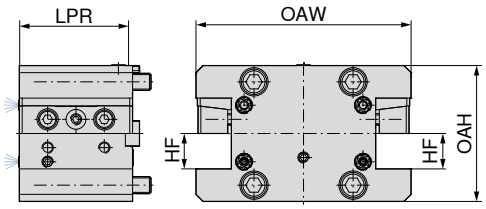

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	82 483 ... EUR Y7		82 483 ... EUR Y7	
BMT 65	70 x 73	25	80	96	152	673,50	**02003**	746,00	**02007**

HAAS/Doosan – BMT 65 – Combi tool holder

▲ directly screwed version
▲ double-sided version

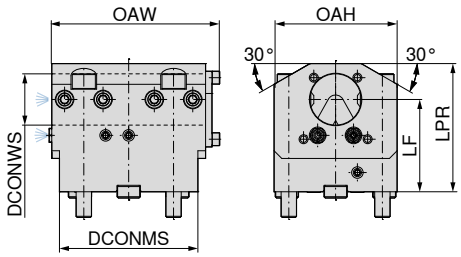



IC

Adapter	Hole pattern	DCONWS mm	LF mm	OAH mm	LPR mm	DCONMS mm	OAW mm	82 483 ... EUR Y7	
BMT 65	70 x 73	40	78	96	100	108	125	917,70	**03004**

Mori/Seiki – BMT 40 – Axial square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

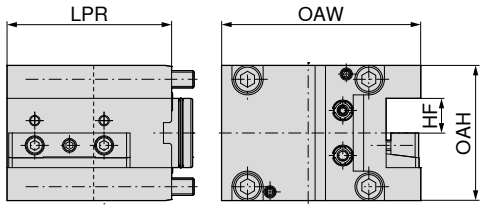

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 484 ... EUR Y7		Left-hand 82 484 ... EUR Y7	
BMT 40	70 x 62	20	95	78	115	405,30	**00001**	472,20	**00005**

Mori/Seiki – BMT 40 – Radial square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

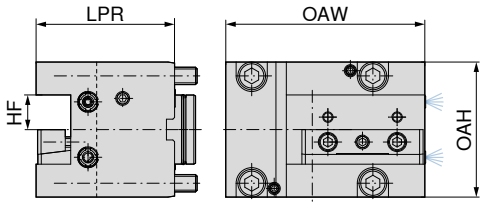

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	Left-hand 82 484 ... EUR Y7		Left-hand 82 484 ... EUR Y7	
BMT 40	70 x 62	20	80	78	115	426,00	**01002**	493,20	**01006**

Mori/Seiki – BMT 40 – Multi square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

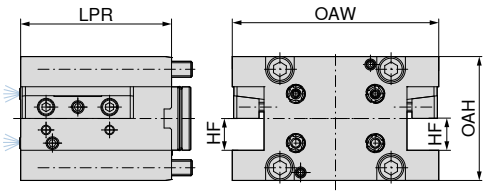

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	82 484 ... EUR Y7	82 484 ... EUR Y7
BMT 40	70 x 62	20	95	78	130	446,70 **02003**	514,30 **02007**

Mori/Seiki – BMT 40 – Combi tool holder

▲ directly screwed version

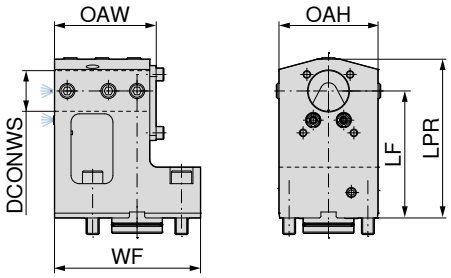

IC

Adapter	Hole pattern	DCONWS mm	OAH mm	OAW mm	LF mm	WF mm	LPR mm	82 484 ... EUR Y7
BMT 40	70 x 62	32	78	80	100	115	125	405,30 **03004**

Mori/Seiki – BMT 60 – Axial square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

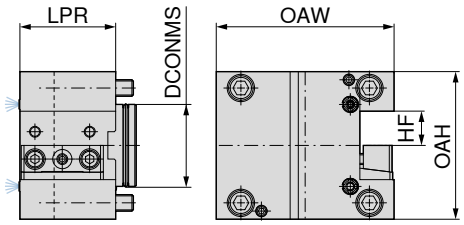



NEW

Direct Cooling

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	Left-hand 82 485 ... EUR Y7		Left-hand 82 485 ... EUR Y7	
BMT 60	94 x 84	25	60	70	108	130	405,30	**00001**	472,20	**00005**

Mori/Seiki – BMT 60 – Radial square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

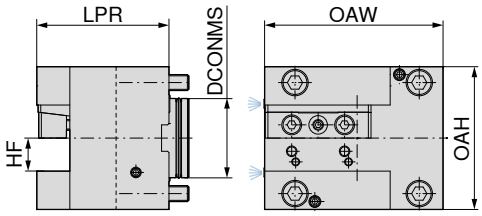

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	Left-hand 82 485 ... EUR Y7		Left-hand 82 485 ... EUR Y7	
BMT 60	94 x 84	25	60	100	108	135	426,00	**01002**	493,20	**01006**

Mori/Seiki – BMT 60 – Multi square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

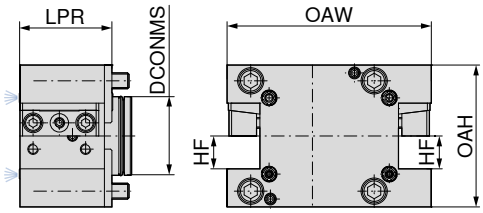

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	82 485 ... EUR Y7		82 485 ... EUR Y7	
BMT 60	94 x 84	25	60	70	108	155,5	488,00	**02003**	556,50	**02007**

Mori/Seiki – BMT 60 – Combi tool holder

▲ directly screwed version

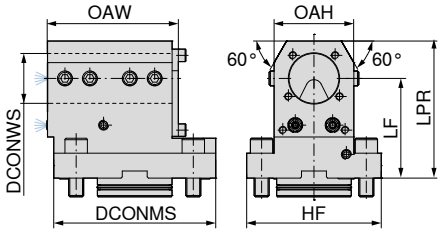

IC

Adapter	Hole pattern	DCONWS mm	OAH mm	LF mm	OAW mm	HF mm	LPR mm	DCONMS mm	82 485 ... EUR Y7	
BMT 60	94 x 84	40	64	80	105	108	110	130	405,30	**03004**

Mazak – BMT 68 – Axial square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

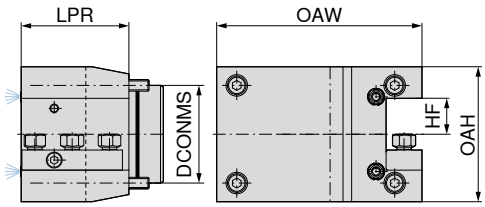



NEW
Direct Cooling

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	Left-hand 82 486 ... EUR Y7		Left-hand 82 486 ... EUR Y7	
BMT 68	110 x 68	25	68	75	94	143	388,10	**00001**	454,60	**00005**

Mazak – BMT 68 – Radial square section tool holder

▲ directly screwed version
▲ For right and left direction of rotation

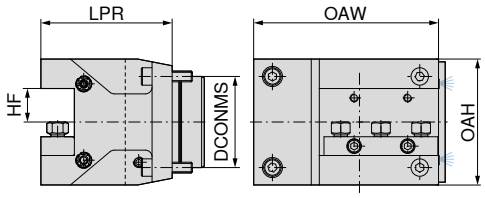



NEW
Direct Cooling

Adapter	Hole pattern	HF mm	DCONMS mm	OAH mm	LPR mm	OAW mm	Left-hand 82 486 ... EUR Y7		Left-hand 82 486 ... EUR Y7	
BMT 68	110 x 68	25	68	94	98	143	394,50	**01002**	461,00	**01006**

EMAG – BMT 68 –
Multi square section tool holder

▲ directly screwed version

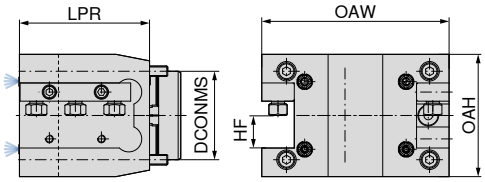

NEW

Direct Cooling

Adapter	Hole pattern	HF mm	DCONMS mm	OAH mm	LPR mm	OAW mm	82 486 ... EUR Y7		82 486 ... EUR Y7	
BMT 68	110 x 68	25	68	94	100	144	621,20	**02003**	692,60	**02007**

Mazak – BMT 68 –
Combi tool holder

▲ directly screwed version

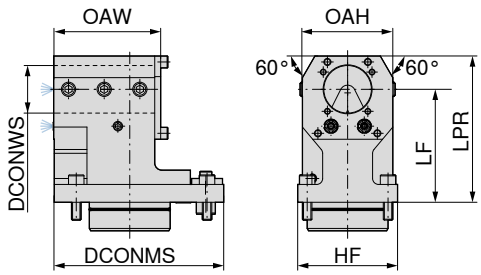

IC

Adapter	Hole pattern	DCONWS mm	OAH mm	HF mm	OAW mm	LF mm	LPR mm	DCONMS mm	82 486 ... EUR Y7	
BMT 68	110 x 68	40	76	84	90	95	123	142,5	379,50	**03004**

Drill chuck

▲ For manual and key clamping
▲ Through-hardened and ground

Scope of supply:
Holder with clamping key

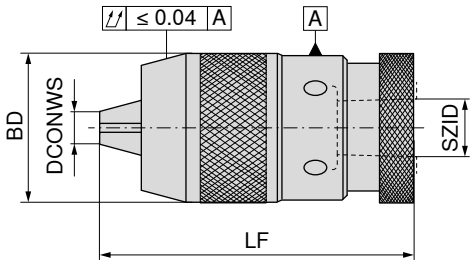

SZID	DCONWS mm	LF mm	BD mm	83 636 ... EUR Y8	
B12	0 - 8	73	35	113,70	**012**
B12	0 - 10	92	43	134,10	**112**
B16	1 - 13	106	50	160,90	**016**
B16	3 - 16	110	57	135,30	**116**
B18	3 - 16	110	57	171,70	**018**

NC clamping key

Spare parts DCONWS	83 302 ... EUR Y8	
0 - 8	10,66	**008**
0 - 10	11,09	**010**
1 - 13	10,66	**013**
3 - 16	12,79	**016**

Drill chuck adapter DIN 238

▲ Through-hardened and ground

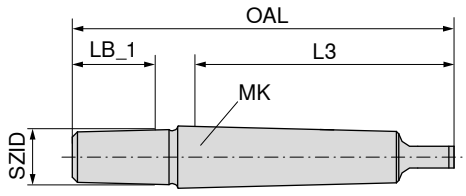

Adapter	SZID	l_3 mm	LB_1 mm	OAL mm	83 642 ... EUR Y8	
MK1	B12	62,0	18,5	89,0	5,86	**120**
MK1	B16	62,0	24,0	97,0	5,20	**160**
MK1	B18	62,0	32,0	106,0	6,21	**180**
MK2	B12	75,0	18,5	106,5	5,86	**121**
MK2	B16	75,0	24,0	110,5	5,86	**161**
MK2	B18	75,0	32,0	117,5	6,27	**181**
MK3	B12	94,0	18,5	125,0	8,12	**122**
MK3	B16	94,0	24,0	134,0	7,86	**162**
MK3	B18	94,0	32,0	141,0	8,42	**182**
MK4	B16	117,5	24,0	159,0	17,72	**163**
MK4	B18	117,5	32,0	168,0	17,98	**183**
MK5	B16	149,5	24,0	196,0	39,06	**164**
MK5	B18	149,5	32,0	204,5	40,55	**184**

Reduction sleeve DIN 2185

▲ Through-hardened, ground internally and externally

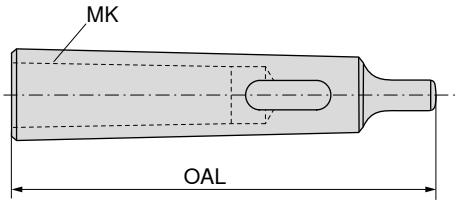

Adapter	d_1	OAL mm	83 644 ... EUR Y8	
MK1	MK0	80	12,63	**010**
MK2	MK1	92	13,07	**020**
MK3	MK1	99	15,54	**130**
MK3	MK2	112	14,32	**030**
MK4	MK1	124	23,66	**240**
MK4	MK2	124	22,45	**140**
MK4	MK3	140	22,03	**040**
MK5	MK2	156	47,71	**250**
MK5	MK3	156	49,21	**150**
MK5	MK4	171	46,91	**050**

Short drill chuck – NC 2010

▲ bidirectional
▲ Torque moment = 12 Nm
▲ with Morse taper

Scope of supply:
Holder with clamping key

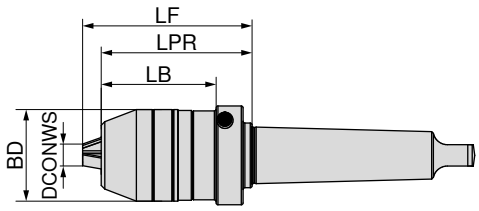

Adapter	DCONWS mm	BD mm	LB mm	LPR mm	LF mm	84 314 ... EUR Y8	
MK3	0,5 - 13	48,5	64	84	93,0	290,80	**313**
MK3	2,5 - 16	51,0	64	84	94,5	290,80	**316**
MK4	2,5 - 16	51,0	64	84	94,5	320,40	**416**

Short drill chuck – NC 2010

▲ bidirectional
▲ Torque moment = 12 Nm
▲ with cylindrical shank

Scope of supply:
Holder with clamping key

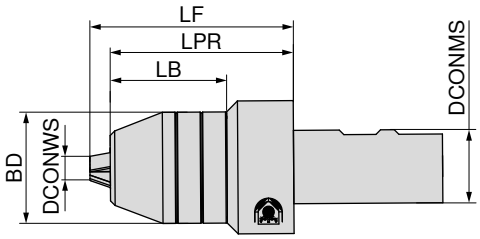

G 6,3 n_{max} 10000

DCONMS mm	DCONWS mm	BD mm	LB mm	LPR mm	LF mm	84 311 ... EUR Y8	
25	0,5 - 13	48,5	50,9	80	89,0	320,40	**213**
32	0,5 - 13	48,5	50,9	80	89,0	348,70	**313**
32	2,5 - 16	51,0	50,9	80	90,5	378,50	**316**

Synchro quick change tapping chuck with minimum length compensation

▲ For collets according to DIN 6499
▲ With length compensation under tension and under compression (LZD)
▲ $p_{max.}$ = 50 bar

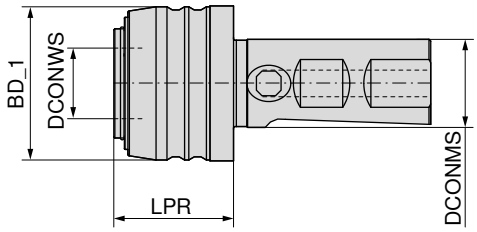

DCONWS mm	cutting range	SZID	LPR mm	BD_1 mm	DCONMS mm	LZD± mm	83 641 ... EUR Y8	
20	M3 - M12	1	35	43,5	25	1,0 / 0,2	171,70	**012**
32	M6 - M20	2	56	60,0	25	1,0 / 0,2	197,40	**020**

Insert for synchro quick change tapping chuck with minimum length compensation

▲ SZID = for insert size

Scope of supply:
Includes lock nut

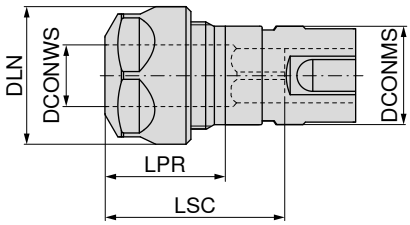

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	83 608 ... EUR Y8	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	142,00	**012** [1]
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	164,90	**020**

1) with 6 position lock nut

Lock nut

Lock nut IK

Lock nut

Y clamping key

Spare parts for Article no.		62 950 ... EUR W7		83 950 ... EUR Y8		62 950 ... EUR W7		83 357 ... EUR Y8	
83 608 012	M22x1,5 - SW25	22,96	**044**	M22x1,5	39,48 **054**	M22x1,5	22,96 **054**	20,69	**116**
83 608 020				M32x1,5	51,29 **055**	M32x1,5	25,68 **055**	22,85	**125**

Quick change tap chuck with length compensation

▲ With cylindrical shank
▲ With length compensation under tension and compression (LZD)
▲ Quick change adapters

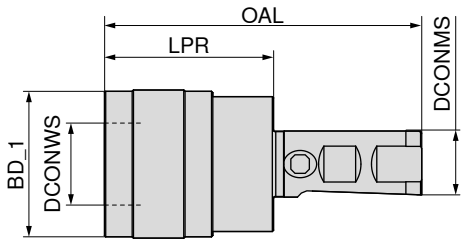

83 648 ...

DCONMS mm	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	OAL mm	LZD± mm	EUR Y8	
20	M3 - M12	01	41	38	19	91	9	250,10	**112**
20	M6 - M20	02	63	55	31	138	15	338,10	**120**
25	M3 - M12	01	41	38	19	97	9	250,10	**212**
25	M6 - M20	02	63	55	31	119	15	306,80	**220**
32	M3 - M12	01	41	38	19	102	9	254,20	**312**
32	M6 - M20	02	63	55	31	124	15	316,40	**320**

DIN 228B – Quick change tap chuck with length compensation

▲ With Morse taper shank
▲ With length compensation under tension and compression (LZD)

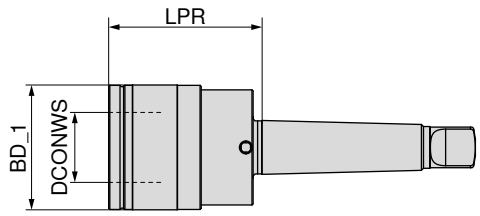

83 646 ...

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	EUR Y8	
MK 2	M3 - M12	01	46	38	19	9	216,20	**212**
MK 3	M3 - M12	01	46	38	19	9	210,90	**312**
MK 3	M6 - M20	02	69	55	31	15	265,00	**320**
MK 4	M6 - M20	02	70	55	31	15	265,00	**420**

Accessories

Collet

→ 288, 290–292

Clamping sleeve for taps in Weldon chucks

▲ For machines with rigid tapping
▲ For safe clamping of taps

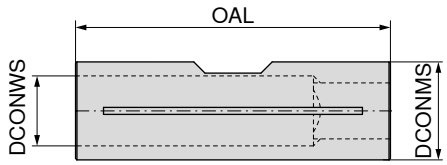



DCONWS h7 mm	DCONMS f6 mm	OAL mm	80 699 ... EUR Y7	
3,5	6	26	43,95	**03500**
4,0	8	32	45,45	**04000**
4,5	8	26	45,45	**04500**
6,0	10	30	44,01	**06000**
7,0	10	31	44,01	**07000**
8,0	12	38	44,61	**08000**
9,0	12	38	44,61	**09000**
10,0	14	42	45,21	**10000**
11,0	14	42	45,21	**11000**
12,0	16	44	45,87	**12000**
14,0	18	45	47,13	**14000**
16,0	20	46	48,43	**16000**

Shrink fit extension

▲ For solid carbide and HSS shanks with h6 tolerance or better
▲ DRVS = Key size of the adjustment screw

TG

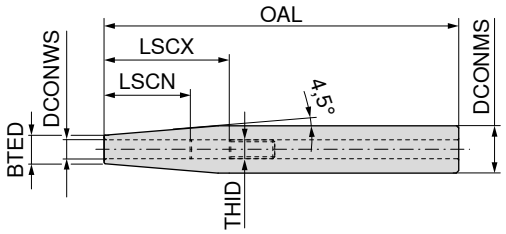

DCONMS h6 mm	DCONWS mm	BTED mm	OAL mm	LSCX mm	LSCN mm	THID	DRVS mm	84 310 ... EUR Y8	
12	3	8	150					146,10	**003**
12	4	8	150					146,10	**004**
12	5	10	150					146,10	**005**
12	6	10	150	36	26	M5	2,5	146,10	**006**
16	3	10	150					146,10	**103**
16	4	10	150					146,10	**104**
16	5	10	150					146,10	**105**
16	6	10	150	36	26	M5	2,5	146,10	**106**
16	8	12	150	36	26	M6	3,0	146,10	**108**
20	3	10	150					146,10	**203**
20	4	10	150					146,10	**204**
20	5	10	150					146,10	**205**
20	6	10	150	36	26	M5	2,5	146,10	**206**
20	8	12	150	36	26	M6	3,0	146,10	**208**
20	10	14	150	42	32	M8x1	3,0	146,10	**210**
20	12	16	150	47	37	M10x1	5,0	146,10	**212**
25	3	10	150					146,10	**303**
25	4	10	150					146,10	**304**
25	5	15	150					146,10	**305**
25	6	20	150	36	26	M5	2,5	146,10	**306**
25	8	20	150	36	26	M6	3,0	146,10	**308**
25	10	20	150	42	32	M8x1	3,0	146,10	**310**
25	12	20	150	47	37	M10x1	5,0	146,10	**312**
25	14	20	150	47	37	M10x1	5,0	146,10	**314**
25	16	22	150	50	40	M10x1	5,0	146,10	**316**
32	6	20	150	36	26	M5	2,5	146,10	**406**
32	8	20	150	36	26	M6	3,0	146,10	**408**
32	10	24	150	42	32	M8x1	3,0	146,10	**410**
32	12	24	150	47	37	M10x1	5,0	146,10	**412**
32	14	27	150	47	37	M10x1	5,0	146,10	**414**
32	16	27	150	50	40	M10x1	5,0	146,10	**416**
32	18	27	150	50	40	M10x1	5,0	146,10	**418**
32	20	27	150	52	42	M10x1	5,0	146,10	**420**

Observe the minimum clamping depth on → **Page 312**.

HyTens – Turn

- ▲ Hydraulic chuck with cylindrical shank
- ▲ For the hydraulic clamping of cylindrical tool shanks tol. h6, boring bars and cylindrical tool holders tol. h7, g6 in fixed base holders
- ▲ One screw for locking the boring bar
- ▲ With length setting screw – can also be removed, to enable the boring bar to be slid through
- ▲ High-precision clamping with a repeatability of 3 µm

Scope of supply:

Base body with backstop screw and pressure screw

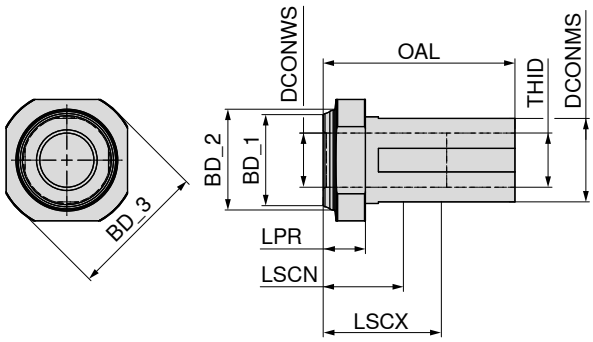



DCONMS mm	DCONWS mm	BD_1 mm	BD_2 mm	BD_3 mm	LPR mm	OAL mm	LSCX mm	LSCN mm	THID	83 402 ... EUR Y8	
32	16	38	41	59	19,5	78,5	51	41	M22x1	379,00	**31699**
32	20	38	41	59	19,5	78,5	51	41	M22x1	379,00	**32099**
40	16	43	46	64	19,5	88,5	51	41	M22x1	390,90	**41699**
40	20	43	46	64	19,5	88,5	51	41	M22x1	390,90	**42099**
40	25	43	46	64	19,5	88,5	57	47	M27x1	390,90	**42599**

Stop screw IK

Spare parts DCONWS	83 950 ... EUR Y7	
16 - 20	27,68	**48500**
25	43,69	**48600**

Hydraulic expansion extension especially for Hydraulic Chucks

▲ For solid carbide and HSS shanks with h6 tolerance or better

Scope of supply:
Base body with backstop screw and pressure screw

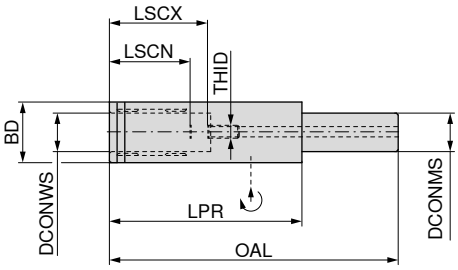

G 2,5 n_{max} 25000

DCONMS mm	DCONWS mm	BD mm	LPR mm	OAL mm	LSCX mm	LSCN mm	THID	84 313 ... EUR Y8	
20	12	25,0	100	150	46	36	M6	363,80	**112**
20	20	31,5	100	150	51	41	M10x1	363,80	**120**
32	20	31,5	90	150	51	41	M10x1	363,80	**132**
32	20	31,5	90	200	51	41	M10x1	374,50	**232**

Observe the minimum clamping depth on → **Page 312**.

Stop screw IK

Spare parts for Article no.		83 950 ... EUR Y7	
84 313 112	M6x12,5 - SW3	10,45	**419**
84 313 120	M10x1x13,5 - SW5	10,45	**421**
84 313 132	M10x1x13,5 - SW5	10,45	**421**
84 313 232	M10x1x13,5 - SW5	10,45	**421**

Micro-precision collet chuck

▲ bidirectional
▲ for speeds up to 60,000 1/min.

Scope of supply:
Holder including clamping wrench SW 2 x 60 mm

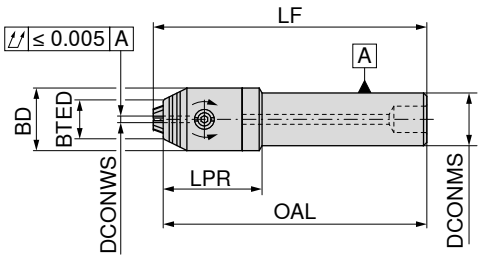

G 2,5 n_{max} 18000

84 315 ...

DCONMS mm	DCONWS mm	LPR mm	OAL mm	LF mm	BD mm	BTED mm	TQX Nm	EUR Y7	
16	0,2 - 3,4	30	80	83	19	12	2	504,20	**161**
16	0,2 - 3,4	30	100	103	19	12	2	530,00	**162**
16	0,2 - 3,4	30	160	163	19	12	2	581,30	**163**
20	0,2 - 3,4	28	80	83	19	12	2	504,20	**201**
20	0,2 - 3,4	28	100	103	19	12	2	530,00	**202**
20	0,2 - 3,4	28	160	163	19	12	2	581,30	**203**

Torx blade

80 950 ...

Torque screwdriver

80 950 ...

Spare parts for Article no.	EUR Y7			EUR Y7	
84 315 161	7,21	**152**	0,5 - 2,0 Nm	153,30	**191**
84 315 162	7,21	**152**	0,5 - 2,0 Nm	153,30	**191**
84 315 163	7,21	**152**	0,5 - 2,0 Nm	153,30	**191**
84 315 201	7,21	**152**	0,5 - 2,0 Nm	153,30	**191**
84 315 202	7,21	**152**	0,5 - 2,0 Nm	153,30	**191**
84 315 203	7,21	**152**	0,5 - 2,0 Nm	153,30	**191**

Micro-extension

▲ for shanks with lateral clamping flat to DIN 6535 HB / 1835 B

Scope of supply:
Holder with shank clamping screw

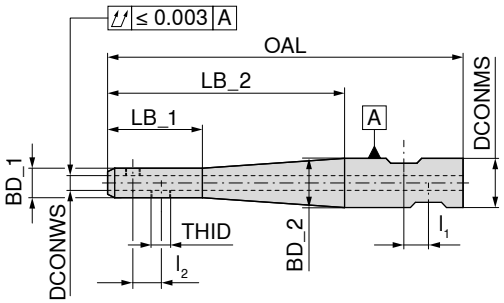



DCONWS mm	BD_1 mm	LB_1 mm	LB_2 mm	OAL mm	DCONMS mm	BD_2 mm	l_1 mm	l_2 mm	THID	TQX Nm	80 642 ... EUR Y7	
6	12	40	40	85	12	12	10	10	M6 x 0,5	7	140,70	**00600**
6	12	40	100	150	20	20	10	10	M6 x 0,5	7	170,40	**10600**
8	15	40	40	88	16	15	10	10	M8 x 0,75	8	137,80	**00800**
8	15	40	100	150	20	20	10	10	M8 x 0,75	8	166,20	**10800**
10	18	40	40	90	20	18	10	10	M10 x 1	12	137,80	**01000**
10	18	40	100	150	20	20	10	10	M10 x 1	12	166,20	**11000**
12	21	40	40	90	20	21	10	10	M12 x 1	15	137,80	**01200**
12	21	40	100	150	20	21	10	10	M12 x 1	15	166,20	**11200**
14	23	40	40	90	20	23	10	10	M12 x 1	15	142,00	**01400**
14	23	40	100	150	20	23	10	10	M12 x 1	15	170,40	**11400**
16	26	40	50	106	25	26	10	12	M14 x 1	18	159,50	**01600**[1)]
16	26	40	100	156	25	26	10	12	M14 x 1	18	196,10	**11600**[1)]
18	28	40	50	106	25	28	10	12	M14 x 1	18	166,20	**01800**[1)]
18	28	40	100	156	25	28	10	12	M14 x 1	18	200,20	**11800**[1)]
20	31	40	50	110	32	31	10	14	M16 x 1	20	164,90	**02000**[1)]
20	31	40	100	160	32	31	10	14	M16 x 1	20	197,40	**12000**[1)]

1) only pre-balanced design

Clamping screw

Spare parts DCONWS		80 950 ... EUR Y7	
6	M6X0,5X3	10,28	**21700**
8	M8x0,75x4	10,28	**21800**
10	M10x1x5	10,28	**21900**
12 - 14	M12x1x5	10,43	**30000**
16 - 18	M14x1x6,5	10,84	**31000**
20	M16x1x6,5	11,14	**32000**

Mini ER precision collet chuck – Centro-P

▲ Maximum clamping range covered according to ISO tolerance field H10
▲ Roll key required for clamping

Scope of supply:
Holder **without** nut, **without** backstop

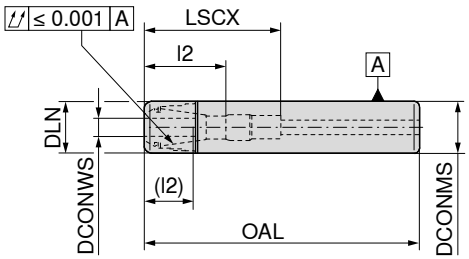

DCONMS mm	DCONWS mm	DLN mm	OAL mm	LSCX mm	l_2 (l_2) mm	for collet	84 456 ... EUR Y8	
10	1 - 5	10	80	16		4004E (ER08)	178,60	**00400**
10	1 - 5	10	150	16		4004E (ER08)	176,40	**005**
10	1 - 5	10	200	16		4004E (ER08)	241,20	**006**
12	1 - 5	10	120	16		4004E (ER08)	191,80	**11000**
12	1 - 5	10	160	16		4004E (ER08)	199,70	**11200**
12	1 - 5	10	200	16		4004E (ER08)	244,30	**11400**
16	1 - 7	16	150	68	18 - 36 (12 - 26)	4008E (ER11)	156,80	**007**
16	1 - 7	16	200	68	18 - 36 (12 - 26)	4008E (ER11)	195,90	**008**
16	1 - 10	22	150	68	28 - 48 (16 - 35)	426E (ER16)	156,80	**010**
16	1 - 10	22	200	68	28 - 48 (16 - 35)	426E (ER16)	198,40	**12000**
20	1 - 10	22	150	68	28 - 48 (16 - 35)	426E (ER16)	164,60	**102**
20	1 - 10	22	200	68	28 - 48 (16 - 35)	426E (ER16)	195,90	**104**

LSCX = Clamping depth without back stop screw for shanks
l_2 = with back stop screw 1, dimension in brackets (l_2) = with back stop screw 2
dimension OAL when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK 84 950 ... EUR Y8		Mini lock nut 84 950 ... EUR Y8		Stop screw 2 83 950 ... EUR Y8		Stop screw 1 83 950 ... EUR Y8	
4004E (ER08)			49,26	**040**				
4008E (ER11)			42,72	**041**	M8x1 - SW4	17,45 **340**	M8x1 - SW4	12,81 **336**
426E (ER16)	53,15	**035**	42,72	**034**	M11x1 - SW6	18,15 **341**	M11x1 - SW6	12,81 **337**

Accessories

ER collet	Device	Roll key	Roll key device
→ 268–276, 279	→ 285	→ 286	→ 286

The transferable torques can be found on → **Page 313**.

ER collet chuck with mini clamping nut

▲ with cylindrical shank

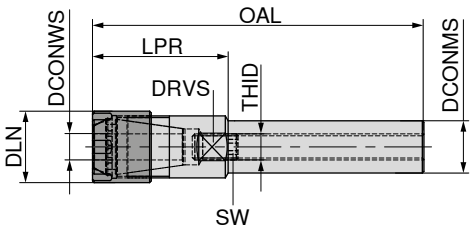

DCONMS h6 mm	DCONWS mm	OAL mm	LPR mm	DLN mm	THID	DRVS mm	SW mm	for collet	83 453 ... EUR Y8	
8	1 - 5	81	26	12		9		4004E (ER08)	100,80	**081** 1)
12	1 - 5	157	20	12	M5x0,8	10	2,5	4004E (ER08)	138,20	**122**
16	1 - 7	185	25	16	M7,5x0,5	14	3,0	4008E (ER11)	148,20	**163**
16	1 - 10	117	37	22	M11x1	17	5,0	426E (ER16)	104,50	**164**
16	1 - 10	199	39	22	M8x1,25	17	4,0	426E (ER16)	148,20	**165**
20	1 - 10	168	28	22	M11x1	17	5,0	426E (ER16)	143,60	**204**
25	1 - 13	168	28	28	M14x1	22	5,0	428E (ER20)	165,40	**254**
25	1 - 16	189	39	35	M18x1	27	5,0	430E (ER25)	207,50	**256**

1) without coolant supply (form A)

ER collet chuck with mini clamping nut

▲ with cylindrical shank and clamping flat

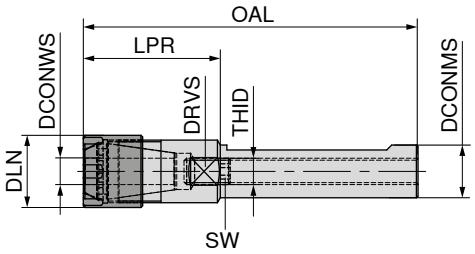

DCONMS h6 mm	DCONWS mm	OAL mm	LPR mm	DLN mm	THID	DRVS mm	SW mm	for collet	83 454 ... EUR Y8	
20	1 - 10	168	28	22	M11x1	17	5	426E (ER16)	143,60	**204**
20	1 - 13	138	38	28	M11x1	22	5	428E (ER20)	107,90	**206**
20	1 - 16	146	46	35	M14x1	27	5	430E (ER25)	125,40	**208**
25	1 - 13	168	28	28	M14x1	22	5	428E (ER20)	165,40	**254**
25	1 - 16	189	39	35	M18x1	27	5	430E (ER25)	207,50	**256**

Spare parts for ER collet chuck with mini lock nut

ER Mini clamping key

Mini lock nut

Mini IK

Stop screw IK

	83 950 ...			62 950 ...			83 950 ...			83 950 ...	
Spare parts for collet	EUR Y8			EUR W7			EUR Y8			EUR Y8	
4004E (ER08)	17,98	**099**	M10x0,75	32,31	**067**						
4004E (ER08)	17,98	**099**	M10x0,75	32,31	**067**				M5x0,8 SW 2,5	4,78	**003**
4008E (ER11)	19,61	**100**	M13x0,75	31,50	**065**				M7,5x0,5 SW 3	2,23	**004**
426E (ER16)	20,81	**101**	M19x1	30,82	**066**	M19x1	46,98	**058**	M11x1 SW 5	2,57	**006**
426E (ER16)	20,81	**101**	M19x1	30,82	**066**	M19x1	46,98	**058**	M8x1,25 SW 4	2,40	**005**
428E (ER20)	23,52	**102**	M24x1	34,74	**068**	M24x1	57,30	**059**	M14x1 SW 5	2,77	**007**
430E (ER25)	26,37	**103**	M30x1	37,98	**069**	M30x1	52,30	**060**	M18x1 SW 5	2,99	**008**

ER Collet Chuck

▲ with cylindrical shank and clamping flat

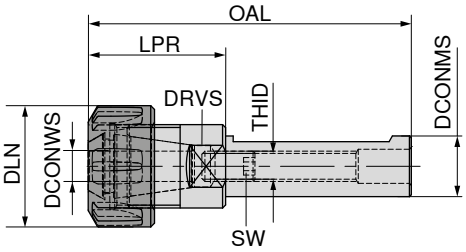

DCONMS $_{h6}$ mm	DCONWS mm	OAL mm	LPR mm	DLN mm	THID	DRVS mm	SW mm	for collet	83 455 ... EUR Y8	
40	2 - 20	100	35	50	M22x1,5	36	5	470E (ER32)	128,20	**401**
40	2 - 20	160	35	50	M22x1,5	36	5	470E (ER32)	157,50	**402**
40	3 - 30	139	59	63	M28x1,5	40	6	472E (ER40)	146,60	**405**

Y clamping key

Stop screw IK

Stop screw

	83 357 ...			83 950 ...			83 950 ...	
Spare parts for collet	EUR Y8			EUR Y8			EUR Y8	
470E (ER32)	31,09	**132**				M22x1,5x20 SW 5	3,74	**095**
472E (ER40)	34,22	**140**	M28x1,5x25 SW 6	4,92	**096**			

Lock nut IK

Lock nut

			83 950 ...			62 950 ...	
Spare parts for collet			EUR Y8			EUR W7	
470E (ER32)	M40x1,5	54,43	**056**	M40x1,5	23,93	**65600**	
472E (ER40)	M50x1,5	64,23	**057**	M50x1,5	23,26	**65700**	

Accessories

ER collet

→ 268–276, 278–279

Cylindrical milling bar for cutters with threaded end

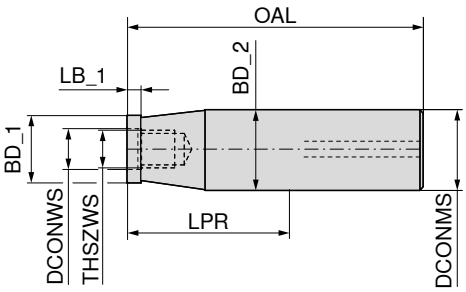

DCONMS h6 mm	THSZWS	DCONWS mm	LPR mm	BD_1 mm	LB_1 mm	BD_2 mm	OAL mm	56 727 ... EUR WA	
12	M5	5,5	20	9,5	7,8	11,5	65	93,69	052
12	M6	6,5	20	11,5	7,8	11,5	65	95,73	060
12	M6	6,5	40	11,5	7,8	11,5	85	103,30	062
16	M8	8,5	20	13,8	7,8	15,8	68	96,94	081
16	M8	8,5	40	13,8	7,8	15,8	88	104,40	082
20	M10	10,5	25	18,0	7,8	19,8	75	101,10	101
20	M10	10,5	45	18,0	7,8	19,8	95	109,20	102
25	M12	12,5	50	21,0	7,8	24,8	106	114,40	122
32	M16	17,0	50	29,0	12,0	31,8	110	123,20	162

Milling bar for cutters with threaded end (Weldon)

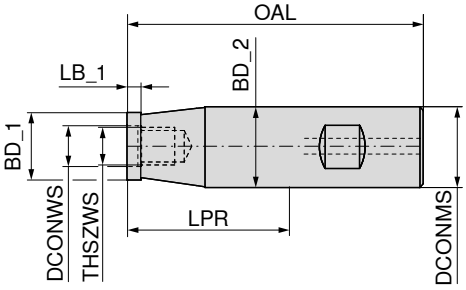

DCONMS h6 mm	THSZWS	DCONWS mm	LPR mm	BD_1 mm	LB_1 mm	BD_2 mm	OAL mm	56 729 ... EUR WA	
12	M6	6,5	20	11,5	7,8	11,5	65	95,73	060
12	M6	6,5	40	11,5	7,8	11,5	85	103,30	062
16	M8	8,5	20	13,8	12,0	15,8	68	96,94	081
16	M8	8,5	40	13,8	8,0	15,8	88	104,40	082
20	M10	10,5	25	18,0	8,0	19,8	75	101,10	101
20	M10	10,5	45	18,0	12,0	19,8	95	109,20	102
25	M12	12,5	30	21,0	12,0	24,9	86	105,20	121
25	M12	12,5	50	21,0	8,0	24,9	106	114,40	122
32	M16	17,0	50	29,0	12,0	31,8	110	123,20	162

Screw-in adapter with cylindrical shank

▲ Vibration-damped

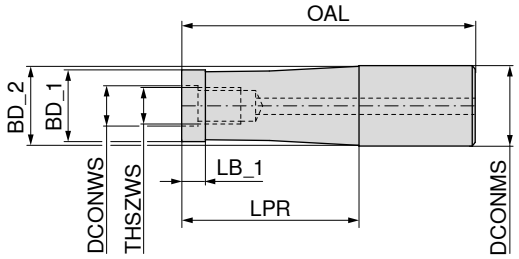

DCONMS h6 mm	THSZWS	DCONWS mm	LPR mm	BD_1 mm	LB_1 mm	BD_2 mm	OAL mm	Solid carbide 56 743 ... EUR WC		Densimet 56 744 ... EUR WC	
12	M5	5,5	40	9,5	9	11,3	85			292,20	**052**
12	M5	5,5	60	9,5	9	11,3	105			315,70	**053**
12	M5	5,5	80	9,5	9	11,3	125			351,50	**054**
12	M6	6,5	20	11,5		11,5	65	369,40	**060**		
12	M6	6,5	40	11,5		11,5	85	394,20	**062**		
12	M6	6,5	60	11,5		11,5	105	436,90	**063**		
12	M6	6,5	80	11,5		11,5	125	478,30	**064**		
12	M6	6,5	100	11,5		11,5	145	519,60	**065**		
16	M8	8,5	40	14,2	9	15,3	88	378,90	**082**	359,80	**082**
16	M8	8,5	60	14,2	9	15,3	108	417,70	**083**	388,70	**083**
16	M8	8,5	80	14,2	9	15,3	128	450,70	**084**	424,60	**084**
16	M8	8,5	100	14,2	9	15,3	148	490,70	**085**	467,20	**085**
16	M8	8,5	120	14,2	9	15,3	168	523,60	**086**	515,50	**086**
16	M8	8,5	150	14,2	9	15,3	198			649,10	**087**
20	M10	10,5	60	18,5	9	19,3	110	480,90	**103**	453,50	**103**
20	M10	10,5	80	18,5	9	19,3	130	541,60	**104**	504,50	**104**
20	M10	10,5	100	18,5	9	19,3	150	589,80	**105**	563,80	**105**
20	M10	10,5	120	18,5	9	19,3	170	669,80	**106**	625,60	**106**
20	M10	10,5	140	18,5	9	19,3	190	746,90	**107**	729,00	**107**
25	M12	12,5	75	23,0	9	24,3	131			680,80	**124**
25	M12	12,5	80	23,0	9	24,3	136	578,80	**124**		
25	M12	12,5	100	23,0	9	24,3	156	673,90	**125**	752,40	**125**
25	M12	12,5	120	23,0	9	24,3	176	838,00	**126**		
25	M12	12,5	125	23,0	9	24,3	181			824,30	**126**
25	M12	12,5	140	23,0	9	24,3	196	967,30	**127**		
25	M12	12,5	150	23,0	9	24,3	206			926,20	**127**
25	M12	12,5	160	23,0	9	24,3	216	1.097,00	**128**		
25	M12	12,5	175	23,0	9	24,3	231			1.049,00	**128**
32	M16	17,0	100	29,0	9	31,5	160	1.232,00	**165** 1)		
32	M16	17,0	150	29,0	9	31,5	210	1.496,00	**166** 1)		
32	M16	17,0	200	29,0	9	31,5	260	1.804,00	**167** 1)		
32	M16	17,0	250	29,0	9	31,5	310	2.164,00	**168** 1)		
32	M16	17,0	300	29,0	9	31,5	360	2.476,00	**169** 1)		

1) On request

Extensions for milling cutters with threaded end

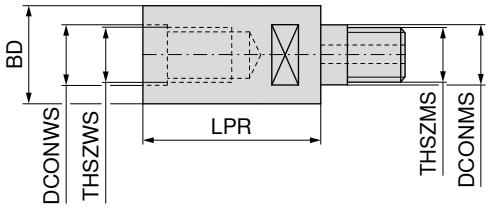

THSZWS	THSZMS	DCONWS mm	DCONMS mm	LPR mm	BD mm	56 733 ... EUR WA	
M8	M8	8,5	8,5	40	13,8	110,40	**081**
M8	M8	8,5	8,5	60	13,8	136,60	**082**
M10	M10	10,5	10,5	40	18,0	114,70	**101**
M10	M10	10,5	10,5	60	18,0	140,70	**102**
M12	M12	12,5	12,5	40	21,0	119,00	**121**
M12	M12	12,5	12,5	60	21,0	144,70	**122**
M16	M16	17,0	17,0	40	29,0	123,20	**161**
M16	M16	17,0	17,0	60	29,0	148,80	**162**

Reductions for milling cutters with threaded end

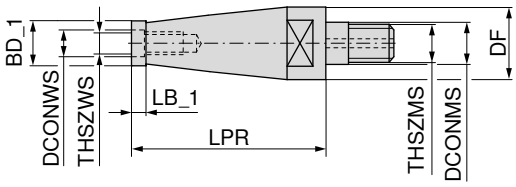

THSZWS	THSZMS	DCONMS mm	DCONWS mm	LPR mm	BD_1 mm	DF mm	LB_1 mm	56 735 ... EUR WA	
M6	M8	8,5	6,5	20	9,5	13,8	7,8	102,50	**060**
M8	M10	10,5	8,5	40	13,8	18,0	7,8	114,70	**081**
M8	M12	12,5	8,5	60	13,8	21,0	7,8	123,20	**082**
M10	M12	12,5	10,5	40	18,0	21,0	7,8	119,00	**101**
M10	M16	17,0	10,5	60	18,0	29,0	7,8	144,70	**102**
M12	M16	17,0	12,5	40	21,0	29,0	7,8	119,00	**121**

MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads

→ Chapter 2, Solid carbide drilling

Page No. 2|107

Solid Carbide NC Spot Drills

Ø 8, 10, 12, 16, 20 mm
NOF 2

SIG 90°

SIG 120°

SIG 142°

→ Chapter 4, Reaming and countersinking

Page No. 4|18 + 4|19

Replaceable reaming heads

Ø 8,00 – 30,20 mm

Through hole

Ø 12,20 – 30,20 mm

Blind hole

→ Chapter 14, Solid carbide milling cutters

Page No. 14|198 – 14|202

Solid carbide shoulder mills
Ø 8, 10, 12, 16, 20 mm /
ZEFP 3+4

Type PCR-UNI

Type PCR-ALU

Type N

Solid carbide torus bull nose milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4


Type W

Type N

Solid carbide rough and finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6

Type NF

Solid carbide finish milling cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide ball-nosed end mills
Ø 10, 12, 16, 20 mm / ZEFP 4

Type N

Solid carbide high-feed cutters
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide quarter round cutter
Ø 8, 10, 12, 16, 20 mm / ZEFP 6

Type N

Solid carbide deburring cutters
Ø 10, 12, 16, 20 mm / ZEFP 4+6

Type N

Type N

NOF / ZEFP = Number of cutting edges

Tool holder

→ Catalogue – Clamping technology, Chapter 16 Accessories

Page No. 16|259 – 16|261

OAL 60 – 90 mm

Tapered 87° / Steel

Cylindrical* / Steel

OAL 85 – 120 mm

Tapered 87° / Steel

Cylindrical* / Steel

Tapered 87° / Solid carbide


Cylindrical* / Solid carbide

OAL 110 – 150 mm

Tapered 87° / Solid carbide

Cylindrical* / Solid carbide

OAL 150 – 200 mm

Tapered 87° / Solid carbide

Cylindrical* / Steel

Cylindrical* / Solid carbide

OAL 200 – 250 mm

Cylindrical* / Steel

Cylindrical* / Solid carbide

* only conditionally suitable for milling

MultiChange – Holders

▲ Tapered 87°
▲ SZID = Coupling Size

Scope of supply:
Holder without mounting key



Steel

Steel

Solid carbide

Solid carbide

Solid carbide

SZID	BD_1 mm	BD_2 mm	DCONMS mm	OAL mm	LB mm	LPR mm	84 001 ... EUR Y8		84 004 ... EUR Y8		84 005 ... EUR Y8		84 007 ... EUR Y8		84 010 ... EUR Y8	
06	7,8	9,4	10	60	18	19	118,40	080								
06	7,8	9,4	10	85	43	44			140,50	080	242,00	080				
06	7,8	9,4	10	110	68	69							267,80	080		
06	7,8	9,4	10	150	108	109									308,20	080
08	9,8	12,0	16	70	25	29	120,30	100								
08	9,8	13,0	16	90	38	41			143,30	100	263,60	100				
08	9,8	14,9	16	110	60	61							294,60	100		
08	9,8	15,4	16	150	100	101									343,30	100
10	11,8	14,2	16	70	27	29	134,00	120								
10	11,8	15,2	16	90	40	41			146,00	120	263,60	120				
10	11,8	16,6	20	110	56	59							377,10	120		
10	11,8	19,5	20	150	98	99									408,20	120
12	15,8	18,2	20	80	27	29	143,30	160								
12	15,8	19,5	20	105	53	54			177,80	160	370,50	160				
12	15,8	19,5	20	130	78	79							442,20	160		
12	15,8	19,5	20	150	98	99									455,70	160
16	19,8	23,2	25	90	39	41	167,10	200								
16	19,8	24,5	25	120	60	61			205,70	200	455,70	200				
16	19,8	24,5	25	150	90	91							512,40	200		
16	19,8	24,5	25	200	140	141									575,90	200

Assembly instructions can be found on → **Page 293**

Accessories

insertion key
→ 293

Adjustable wrench
→ 293

MultiChange – Holders

▲ cylindrical
▲ only conditionally suitable for milling
▲ SZID = Coupling Size

Scope of supply:
Holder without mounting key



						84 000 ...		84 002 ...		84 008 ...		84 011 ...	
						Steel		Steel		Steel		Steel	
SZID	BD_1	DCONMS	OAL	LB	LPR	EUR		EUR		EUR		EUR	
	mm	mm	mm	mm	mm	Y8		Y8		Y8		Y8	
06	7,8	10	60	17	19	107,40	080						
06	7,8	10	85	42	44			126,10	080				
06	7,8	10	150	107	109					177,80	080		
08	9,8	12	70	22	24	109,30	100						
08	9,8	12	90	42	44			129,30	100				
08	9,8	12	150	102	104					181,70	100		
10	11,8	16	70	17	21	121,20	120						
10	11,8	16	90	37	41			131,90	120				
10	11,8	16	150	97	101					185,70	120		
12	15,8	16	80	30	31	130,20	160						
12	15,8	16	105	55	56			157,80	160				
12	15,8	16	150	100	101					222,90	160		
12	15,8	16	200	150	151							403,20	160
16	19,8	25	90	26	31	152,50	200						
16	19,8	25	120	56	61			185,70	200				
16	19,8	25	200	136	141					261,20	200		
16	19,8	25	250	186	191							449,50	200

Assembly instructions can be found on → **Page 293**

Accessories

insertion key
→ 293

Adjustable wrench
→ 293

MultiChange – Holders

▲ cylindrical
▲ only conditionally suitable for milling
▲ SZID = Coupling Size

Scope of supply:
Holder without mounting key



Solid carbide

Solid carbide

Solid carbide

Solid carbide

SZID	BD_1 mm	DCONMS mm	OAL mm	LB mm	LPR mm	84 003 ... EUR Y8		84 006 ... EUR Y8		84 009 ... EUR Y8		84 012 ... EUR Y8	
06	7,8	10	85	42	44	242,00	080						
06	7,8	10	110	67	69			267,80	080				
06	7,8	10	150	107	109					308,20	080		
08	9,8	12	90	42	44	255,50	100						
08	9,8	12	110	62	64			279,80	100				
08	9,8	12	150	102	104					327,20	100		
10	11,8	16	90	37	41	263,60	120						
10	11,8	16	110	57	61			294,60	120				
10	11,8	16	150	97	101					343,30	120		
12	15,8	16	105	55	56	286,60	160						
12	15,8	16	130	80	81			390,70	160				
12	15,8	16	150	100	101					443,40	160		
12	15,8	16	200	150	151							586,80	160
16	19,8	25	120	56	61	455,70	200						
16	19,8	25	150	86	91			512,40	200				
16	19,8	25	200	136	141					575,90	200		
16	19,8	25	250	186	191							888,30	200

Assembly instructions can be found on → **Page 293**

Accessories

insertion key
→ 293

Adjustable wrench
→ 293

Extension for Shell mill arbors

▲ Variable applications through usage of one or two extensions (max. 2 x 50 mm possible)

Scope of supply:
Holder without clamping screw

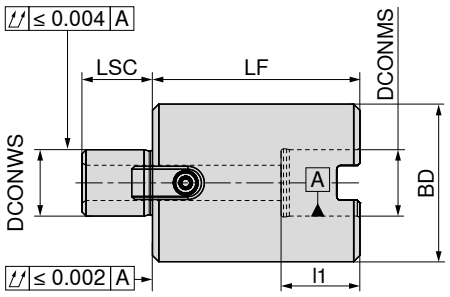

DCONWS $_{h5}$ mm	DCONMS $_{H5}$ mm	LF mm	BD mm	LSC mm	l_1 mm	82 648 ... EUR Y8/3B	
16	16	50	38	17	19	98,42	**050**
16	16	75	38	17	19	99,10	**075**
22	22	50	48	19	21	100,90	**150**
22	22	75	48	19	21	101,80	**175**
27	27	50	58	21	23	105,60	**250**
27	27	75	58	21	23	107,50	**275**
32	32	50	78	24	26	114,50	**350**
32	32	75	78	24	26	118,60	**375**
40	40	50	88	27	29	142,00	**450**
40	40	75	88	27	29	147,30	**475**

Screw for drivers

Driver

Cross screw

Cross screw

Spare parts for Article no.	83 950 ...	EUR Y8/3B		83 950 ...	EUR Y8/3B		82 649 ...	EUR Y8/3B		82 649 ...	EUR Y8/3B	
82 648 050	M3x8	0,48	**296**	8x9x17,5	9,32	**120**	M8x125	5,60	**001**	M8x80	3,44	**050**
82 648 075	M3x8	0,48	**296**	8x9x17,5	9,32	**120**				M8x100	4,75	**075**
82 648 150	M4x12	0,61	**297**	10x11x20,5	9,65	**121**	M10x125	8,24	**100**	M10x80	5,44	**150**
82 648 175	M4x12	0,61	**297**	10x11x20,5	9,65	**121**				M10x100	7,18	**175**
82 648 250	M5x12	0,74	**136**	12x13x24,3	10,93	**122**	M12x125	12,61	**200**	M12x80	7,96	**250**
82 648 275	M5x12	0,74	**136**	12x13x24,3	10,93	**122**				M12x100	10,74	**275**
82 648 350	M5x20	0,82	**137**	14x21x21,2	11,28	**123**	M16x125	18,51	**300**	M16x80	11,68	**350**
82 648 375	M5x20	0,82	**137**	14x21x21,2	11,28	**123**				M16x100	16,36	**375**
82 648 450	M6x16	0,97	**138**	15,9x16,3x19,5	14,47	**295**						
82 648 475	M6x16	0,97	**138**	15,9x16,3x19,5	14,47	**295**						

When using two extension pieces (max. 2 x 50 mm) please use a tightening bolt with a length of 125 mm.

Milling Adapter Rings
DIN 2084 Form B

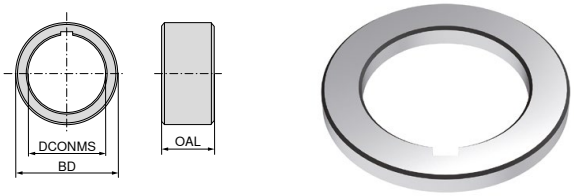

			83 385 ...	
DCONMS mm	BD mm	OAL mm	EUR Y8	
13	22	2	7,63	013
	22	3	7,70	113
	22	4	8,06	213
	22	5	8,25	313
	22	6	8,67	413
	22	10	9,71	513
16	26	2	6,77	016
	26	3	6,78	116
	26	4	6,87	216
	26	5	7,15	316
	26	6	7,34	416
	26	10	10,48	516
	26	20	13,34	616
	26	30	16,61	716
22	34	2	7,01	022
	34	3	7,15	122
	34	4	7,21	222
	34	5	7,90	322
	34	6	8,95	422
	34	10	12,31	522
	34	20	15,41	622
	34	30	20,43	722
27	41	2	7,70	027
	41	3	7,88	127
	41	4	8,68	227
	41	5	8,99	327
	41	6	10,12	427
	41	10	12,56	527
	41	20	17,04	627
	41	30	22,58	727
32	47	2	8,60	032
	47	3	9,10	132
	47	4	9,93	232
	47	5	10,74	332
	47	6	11,38	432
	47	10	13,91	532
	47	20	20,96	632
	47	30	25,42	732
40	55	2	9,99	040
	55	3	11,10	140
	55	4	12,25	240
	55	5	13,34	340
	55	6	14,47	440
	55	10	19,46	540
	55	20	26,49	640
	55	30	32,84	740

Spare parts for VDI holders with DirectCooling

Clamping rail

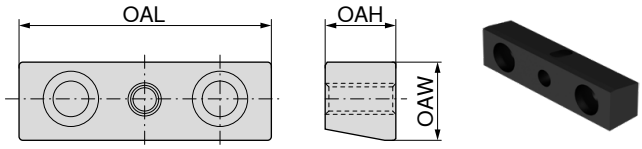

OAL mm	OAW mm	OAH mm	82 250 ... EUR Y8	
53,0	12,7	11,5	14,43	05300
54,0	16,0	15,0	14,43	05400
67,5	16,0	15,0	18,03	06750
68,0	21,0	19,0	18,03	06800
83,0	20,5	19,0	21,65	08300
90,0	20,5	19,0	25,77	09000

Screw for ball-shaped spray nozzle

THOD	82 950 ... EUR Y8	
M3x10	2,82	31000
M4x10	2,82	31300
M5x12	3,61	31100
M6x12	4,38	31200

Clamping wedge

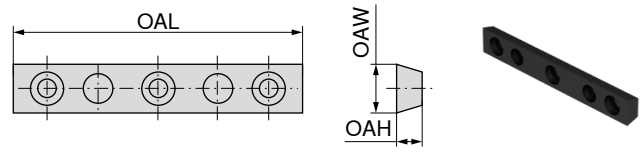

OAL mm	OAW mm	OAH mm	82 250 ... EUR Y8	
70	14	7,3	18,03	07000
85	14	7,3	21,65	08500
100	14	7,3	25,77	10000

Ball-shaped spray nozzle

THID	BD mm	82 950 ... EUR Y8	
M5	8	7,20	30600
M6	10	9,03	30900
M6	12	10,83	30700
M6	14	12,87	30800

Levelling plates

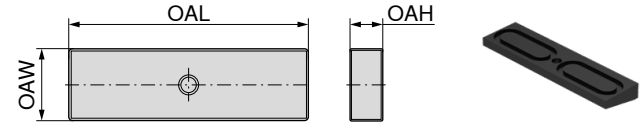

OAL mm	OAW mm	OAH mm	82 250 ... EUR Y8	
53,0	14	6,1	28,86	15300
67,5	18	6,3	36,08	16750
83,0	22	7,5	43,82	18300
90,0	22	7,5	50,51	19000

Spare parts for VDI holders with DirectCooling

O ring for clamping wedge

Size	82 950 ... EUR Y8	
Ø13 x Ø2	5,41	32600
Ø18 x Ø2	7,20	32700
Ø22 x Ø2	7,20	32800

Screw plug for ball-shaped spray nozzle



THOD	OAL mm	82 950 ... EUR Y8	
M5	6	3,10	32900
M6	6	3,10	33000

O ring for ball-shaped spray nozzle

Size	82 950 ... EUR Y8	
Ø10 x Ø2	2,82	31600
Ø5 x Ø1,5	2,82	31400
Ø7 x Ø1,5	2,82	31700
Ø7 x Ø2,5	2,82	31500

Screw for clamping wedge

THOD	82 950 ... EUR Y8	
M5x12	3,61	31800
M6x16	5,41	32200
M6x20	5,41	31900
M8x20	7,20	32300
M8x25	9,03	32100

Quad ring

Size	82 950 ... EUR Y8	
Ø21,95 x Ø1,78	10,83	32400
Ø28,3 x Ø1,78	12,87	32500

16

Screw
for cylindrical adapters E2



THOD	OAL mm	DRVS mm	83 950 ... EUR Y8	
M6	12	3	2,66	461
M6	16	3	2,66	462
M6	25	3	2,66	463
M8	10	4	2,66	464
M8	12	4	2,66	465
M8	16	4	2,66	466
M8	20	4	2,66	467
M8	25	4	2,66	468
M8	30	4	2,66	469
M10	16	5	2,66	470
M10	20	5	2,66	471
M10	25	5	3,15	472
M10	30	5	2,90	473
M12	12	6	3,15	474
M12	16	6	3,15	475
M12	20	6	3,15	476
M12	25	6	3,15	477

Levelling plates

▲ For axial and radial tool holders
▲ Without mounting thread



OAH mm	OAL mm	OAW mm	83 950 ... EUR Y8	
4	38	14	14,21	210
4	48	14	14,21	211
4	54	14	14,21	212
4	55	12	14,21	213
4	69	16	14,21	214
4	72	14	14,21	215
4	75	12	14,21	216
4	99	16	14,21	217
5	84	20	14,21	218
5	117	20	14,21	219
7	99	25	14,21	220
7	120	25	16,36	221
7	129	25	14,21	222
7	143	25	14,21	223

Clamping screw
for cylindrical adapters E1

THOD	83 950 ... EUR Y8	
M10x1x10	6,33	180
M12x1x12	6,33	181
M16x1x13	7,76	182

Lock nut with external thread form ER for sealing rings with internal cooling

for collet	THOD	DRVS mm	83 950 ... EUR Y8	
ER 16	M24x1	19	64,42	**45600**
ER 20	M28x1,5	22	67,69	**45700**
ER 25	M32x1,5	24	70,19	**45800**
ER 32	M40x1,5	32	75,13	**45900**

Ball-shaped spray nozzle

	83 950 ... EUR Y8	
Ø 8 - M 5	3,55	**200**
Ø 10 - M 6	4,49	**201**
Ø 14 - M 8	4,49	**202**

O-Ring

Adapter	Size	83 950 ... EUR Y8	
VDI 16	15 x 1,5	1,12	**205**
VDI 20	18,77 x 1,78	1,12	**206**
VDI 30	28,3 x 1,78	1,12	**207**
VDI 40	37,77 x 2,62	1,12	**208**
VDI 50	47,29 x 2,62	1,12	**209**

Pipe joints

▲ steel pipe

THOD	CXD mm	Type	83 950 ... EUR Y7	
M8x1	5	A	8,84	**372**
M10x1	6	A	19,46	**373**
M10x1	8	A	11,07	**374**
M8x1	5	B	8,84	**375**
M10x1	6	B	19,46	**376**
M10x1	8	B	19,46	**377**

Spray nozzle element

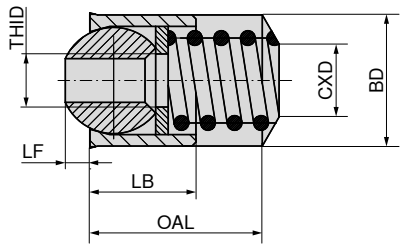

BD mm	THID	OAL mm	LB mm	LF mm	CXD mm	83 950 ... EUR Y8	
9,88	M4	13	8	2,2	5,5	12,85	**247**
11,88	M6	15	10	3,0	6,8	12,85	**248**
13,88	M6	17	12	4,0	6,8	12,85	**249**

Precision ER collet for precision collet chuck – Centro-P

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ 12 times slotted
- ▲ Double taper collet
- ▲ Coloured ring as identification of precision collet
- ▲ ER08: 5 µm runout and repeatability
- ▲ Coated precision collet

ER-B
2 µm



	BD = 8,5 OAL = 13,6 4004 E / ER08		BD = 11,5 OAL = 18 4008 E / ER11		BD = 17 OAL = 27,5 426 E / ER16		BD = 26 OAL = 34 430 E / ER25		BD = 33 OAL = 40 470 E / ER32		BD = 41 OAL = 46 472 E / ER40	
	84 577 ...		**84 585 ...**		**84 596 ...**		**84 597 ...**		**84 598 ...**		**84 599 ...**	
DCONWS mm	**EUR** Y8		**EUR** Y8		**EUR** Y8		**EUR** Y8		**EUR** Y8		**EUR** Y8	
1,0	83,64	**010**	80,39	**010**	79,74	**010**						
1,1					125,10	**011**						
1,2					125,10	**012**						
1,4					125,10	**014**						
1,5	83,64	**015**	80,39	**015**	79,74	**015**						
1,6					125,10	**016**						
1,8					125,10	**018**						
2,0	65,15	**020**	62,58	**020**	59,99	**020**	61,90	**020**	63,53	**020**		
2,2					110,80	**022**						
2,4					110,80	**024**						
2,5	65,15	**025**	62,58	**025**	59,99	**025**	61,90	**025**				
2,6					110,80	**026**						
2,8					110,80	**028**						
3,0	56,04	**030**	53,15	**030**	51,20	**030** [1]	52,50	**030**	53,15	**030**	88,13	**030**
3,2					98,51	**032**						
3,4					98,51	**034**						
3,5	56,04	**035**	53,15	**035**	73,26	**035**	77,12	**035**				
3,6					98,51	**036**						
3,8					98,51	**038**						
4,0	56,04	**040**	53,15	**040**	51,20	**040** [1]	52,50	**040**	53,15	**040** [1]	67,11	**040**
4,5	56,04	**045**	53,15	**045**	73,26	**045**	77,12	**045**				
5,0	56,04	**050**	53,15	**050**	51,20	**050** [1]	52,50	**050**	53,15	**050**	67,11	**050**
5,5			53,15	**055**	73,26	**055**	77,12	**055**				
5,6					98,51	**056**						
6,0			53,15	**060**	51,20	**060** [1]	52,50	**060** [1]	53,15	**060** [1]	67,11	**060**
6,3					98,51	**063**						
6,5			53,15	**065**	73,26	**065**	77,12	**065**				
7,0			53,15	**070**	51,20	**070**	52,50	**070**	53,15	**070**	67,11	**070**
7,1					98,51	**071**						
7,5					73,26	**075**	77,12	**075**				
8,0					51,20	**080** [1]	52,50	**080** [1]	53,15	**080** [1]	67,11	**080**
8,5					73,26	**085**	77,12	**085**				
9,0					51,20	**090**	52,50	**090**	53,15	**090**	67,11	**090**
9,5					73,26	**095**	77,12	**095**				
10,0					51,20	**100** [1]	52,50	**100** [1]	53,15	**100** [1]	67,11	**100**
10,5							77,12	**105**				
11,0							52,50	**110**	53,15	**110**	67,11	**110**
11,5							77,12	**115**				
12,0							52,50	**120** [1]	53,15	**120** [1]	67,11	**120**
12,5							77,12	**125**				
13,0							52,50	**130**	53,15	**130**	67,11	**130**
13,5							77,12	**135**				
14,0							52,50	**140** [1]	53,15	**140** [1]	67,11	**140**
14,5							77,12	**145**				
15,0							52,50	**150**	53,15	**150**	67,11	**150**
15,5							77,12	**155**				
16,0							52,50	**160** [1]	53,15	**160** [1]	67,11	**160**
17,0									53,15	**170**	67,11	**170**
18,0									53,15	**180**	67,11	**180**
19,0									53,15	**190**	67,11	**190**
20,0									53,15	**200** [1]	67,11	**200**
21,0											67,11	**210**
22,0											67,11	**220**
23,0											67,11	**230**
24,0											67,11	**240**
25,0											67,11	**250**
26,0											67,11	**260**
Set in wooden box					326,70	**999**	394,20	**999**	453,80	**999**		

1) Included in the set

Clamping range covered: H10 corresponding to shank Ø DCONWS

ER precision collet, sealed, for precision collet chuck – Centro-P

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ Coloured ring as identification of precision collet
- ▲ $p_{max.}$ = 60 bar
- ▲ Coated precision collet

ER-B
2 µm



DCONWS mm	BD = 11,3 OAL = 18 425 E / ER11		BD = 16,7 OAL = 27,5 425 E / ER16		BD = 25,7 OAL = 34 429 E / ER25		BD = 32,7 OAL = 40 469 E / ER32		BD = 40,7 OAL = 46 471 E / ER40	
	84 536 ...		**84 537 ...**		**84 538 ...**		**84 539 ...**		**84 540 ...**	
	EUR Y8		EUR Y8		EUR Y8		EUR Y8		EUR Y8	
3	75,18	030	68,69	030	79,07	030	81,68	030		
4	75,18	040	68,69	040	72,60	040	75,18	040		
5	81,68	050	75,18	050	79,07	050	81,68	050		
6	75,18	060	68,69	060	72,60	060	75,18	060	85,54	060
7			75,18	070	79,07	070	81,68	070		
8			68,69	080	72,60	080	75,18	080	85,54	080
9			75,18	090	79,07	090	81,68	090		
10			68,69	100	72,60	100	75,18	100	85,54	100
11					79,07	110	81,68	110		
12					72,60	120	75,18	120	85,54	120
13					79,07	130	81,68	130		
14					72,60	140	75,18	140	85,54	140
15					79,07	150	81,68	150		
16					72,60	160	75,18	160	85,54	160
17							81,68	170		
18							75,18	180	85,54	180
19							81,68	190		
20							75,18	200	85,54	200
22									94,63	220
25									85,54	250

ER precision collet, sealed with coolant channels, for precision collet chuck – Centro-P

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ Coloured ring as identification of precision collet
- ▲ Coated precision collet

ER-A
2 µm



DCONWS mm	BD = 11,3 OAL = 18 4012 E / ER11 **84 547 ...**		BD = 16,7 OAL = 27,5 425 E / ER16 **84 548 ...**		BD = 25,7 OAL = 34 429 E / ER25 **84 549 ...**		BD = 32,7 OAL = 40 469 E / ER32 **84 550 ...**		BD = 40,7 OAL = 46 471 E / ER40 **84 551 ...**	
	EUR Y8		EUR Y8		EUR Y8		EUR Y8		EUR Y8	
3	113,00	03000	101,10	03000						
4	113,00	04000	101,10	040	107,60	040	111,50	040		
6	113,00	06000	101,10	060	107,60	060	111,50	060	128,30	06000
8			101,10	080	107,60	080	111,50	080	128,30	08000
10			101,10	10000	107,60	100	111,50	100	128,30	100
12					107,60	120	111,50	120	128,30	120
14					107,60	140	111,50	140		
16					107,60	16000	111,50	160	128,30	160
18							111,50	180		
20							111,50	200	128,30	200
25									128,30	250

ER precision collet

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ 12 times slotted
- ▲ Double taper collet
- ▲ Coated collet

ER-B
5 µm



DCONWS mm		BD = 11,5 OAL = 18 4008 E / ER11		BD = 17 OAL = 27,5 426 E / ER16		BD = 21 OAL = 31,5 428 E / ER20		BD = 26 OAL = 34 430 E / ER25		BD = 33 OAL = 40 470 E / ER32		BD = 41 OAL = 46 472 E / ER40	
		84 576 ...		**84 578 ...**		**84 579 ...**		**84 580 ...**		**84 581 ...**		**84 582 ...**	
		EUR Y8		EUR Y8		EUR Y8		EUR Y8		EUR Y8		EUR Y8	
1,0		32,43	010	31,45	010	32,42	010 1)	34,14	010 1)				
1,5		32,43	015	31,45	015 1)	32,42	015 1)	34,14	015 1)				
2,0		32,43	020	31,45	020	32,42	020	34,14	020	36,10	020 1)		
2,5		32,43	025	31,45	025 1)	32,42	025 1)	34,14	025 1)	36,10	025 1)		
3,0		26,31	030	24,82	030	25,67	030	26,31	030	28,00	030	48,60	030 1)
3,5		26,31	035										
4,0		26,31	040	24,82	040	25,67	040	26,31	040	28,00	040	36,13	040
4,5		26,31	045										
5,0		26,31	050	24,82	050	25,67	050	26,31	050	28,00	050	36,13	050
5,5		26,31	055										
6,0		26,31	060	24,82	060	25,67	060	26,31	060	28,00	060	36,13	060
6,5		26,31	065										
7,0		26,31	070	24,82	070	25,67	070	26,31	070	28,00	070	36,13	070
8,0				24,82	080	25,67	080	26,31	080	28,00	080	36,13	080
9,0				24,82	090	25,67	090	26,31	090	28,00	090	36,13	090
10,0				24,82	100	25,67	100	26,31	100	28,00	100	36,13	100
11,0						25,67	110	26,31	110	28,00	110	36,13	110
12,0						25,67	120	26,31	120	28,00	120	36,13	120
13,0						25,67	130	26,31	130	28,00	130	36,13	130
14,0								26,31	140	28,00	140	36,13	140
15,0								26,31	150	28,00	150	36,13	150
16,0								26,31	160	28,00	160	36,13	160
17,0										28,00	170	36,13	170
18,0										28,00	180	36,13	180
19,0										28,00	190	36,13	190
20,0										28,00	200	36,13	200
21,0												36,13	210
22,0												36,13	220
23,0												36,13	230
24,0												36,13	240
25,0												36,13	250
26,0												36,13	260
	Set in wooden box	388,90	999	282,60	999	344,80	999	435,60	999	544,50	999	881,50	999

1) not included in the set

Clamping range covered: up to Ø 2 mm = 0.5 mm, from Ø 2.5 mm = 1 mm

16

ER collet

- ▲ DIN ISO 15488-B (alt DIN 6499-B)
- ▲ 16 times slotted
- ▲ Double taper clamping

ER-B
10 µm





		NEW		NEW		NEW		NEW	
		BD = 8,5 OAL = 13,6 4004 E / ER08		BD = 17 OAL = 27,5 426 E / ER16		BD = 26 OAL = 34 430 E / ER25		BD = 33 OAL = 40 470 E / ER32	
		82 683 ...		**82 684 ...**		**82 685 ...**		**82 686 ...**	
DCONWS mm		EUR Y8		EUR Y8		EUR Y8		EUR Y8	
1,0		25,86	**01000**	20,55	**01000**				
1,5		25,86	**01500**						
2,0		25,86	**02000**	20,55	**02000**	21,50	**02000**		
2,5		25,86	**02500**						
3,0		25,86	**03000**	20,55	**03000**	21,50	**03000**	22,75	**03000**
3,5		25,86	**03500**						
4,0		25,86	**04000**	20,55	**04000**	21,50	**04000**	22,75	**04000**
4,5		25,86	**04500**						
5,0		25,86	**05000**	20,55	**05000**	21,50	**05000**	22,75	**05000**
6,0				20,55	**06000**	21,50	**06000**	22,75	**06000**
7,0				20,55	**07000**	21,50	**07000**	22,75	**07000**
8,0				20,55	**08000**	21,50	**08000**	22,75	**08000**
9,0				20,55	**09000**	21,50	**09000**	22,75	**09000**
10,0				20,55	**10000**	21,50	**10000**	22,75	**10000**
11,0						21,50	**11000**	22,75	**11000**
12,0						21,50	**12000**	22,75	**12000**
13,0						21,50	**13000**	22,75	**13000**
14,0						21,50	**14000**	22,75	**14000**
15,0						21,50	**15000**	22,75	**15000**
16,0						21,50	**16000**	22,75	**16000**
17,0								22,75	**17000**
18,0								22,75	**18000**
19,0								22,75	**19000**
20,0								22,75	**20000**
	Set in plastic case	257,70	**99900**	227,60	**99900**	344,20	**99900**	435,50	**99900**

Clamping range covered: up to Ø 3 mm = 0.5 mm, from Ø 4 mm = 1 mm

ER precision tap collet

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ For Centro-P and standard chucks
- ▲ $p_{max.}$ = 60 bar
- ▲ Coated collet

ER-A
10 µm



DCONWS mm	BD = 16,7 OAL = 27,5 4031 E / ER16		BD = 25,7 OAL = 34 4282 E / ER25		BD = 32,7 OAL = 40 4537 E / ER32	
	84 531 ...		**84 533 ...**		**84 534 ...**	
	EUR Y8		EUR Y8		EUR Y8	
2,8	65,37	028				
3,5	55,77	035	61,19	035		
4,0	55,77	040	61,19	040	67,31	040
4,5	55,77	045	61,19	045	67,31	045
6,0	55,77	060	61,19	060	67,31	060
7,0	55,77	070	61,19	070	67,31	070
8,0	55,77	080	61,19	080	67,31	080
9,0	55,77	090	61,19	090	67,31	090
10,0			61,19	100	67,31	100
11,0			61,19	110	67,31	110
12,0			61,19	120	67,31	120
14,0			61,19	140	67,31	140
16,0			61,19	160	67,31	160
18,0					67,31	180
20,0					67,31	200

ER precision collet, sealed with coolant channels

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ For Centro-P and standard chucks
- ▲ Coated collet

ER-A
10 µm



DCONWS mm	BD = 16,7 OAL = 27,5 4537 E / ER16 **84 567 ...** EUR Y8		BD = 25,7 OAL = 34 4537 E / ER25 **84 568 ...** EUR Y8		BD = 32,7 OAL = 40 4537 E / ER32 **84 569 ...** EUR Y8	
3,5	89,45	035				
4,5	89,45	045	98,50	045	106,30	045
6,0	89,45	060	98,50	060	106,30	060
7,0	89,45	070	98,50	070	106,30	070
8,0	89,45	080	98,50	080	106,30	080
9,0	89,45	09000	98,50	090	106,30	090
10,0			98,50	100	106,30	100
11,0			98,50	110	106,30	110
12,0			98,50	120	106,30	120
14,0			98,50	140	106,30	140
16,0			98,50	16000	106,30	160
18,0					106,30	180
20,0					106,30	200

ER precision collet

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ Double taper collet
- ▲ 16 times slotted

ER-B
20 µm





		NEW	NEW	NEW	NEW	NEW
		BD = 17 OAL = 27,5 426 E / ER16	BD = 21 OAL = 31,5 428 E / ER20	BD = 26 OAL = 34 430 E / ER25	BD = 33 OAL = 40 470 E / ER32	BD = 41 OAL = 46 472 E / ER40
		82 687 ...	**82 688 ...**	**82 689 ...**	**82 690 ...**	**82 691 ...**
DCONWS mm		**EUR** Y8	**EUR** Y8	**EUR** Y8	**EUR** Y8	**EUR** Y8
1		20,14 **01000**	20,81 **01000**			
2		20,14 **02000**	20,81 **02000**	21,62 **02000**		
3		16,36 **03000**	15,13 **03000**	16,22 **03000**	17,45 **03000**	22,03 **03000**
4		16,36 **04000**	15,13 **04000**	16,22 **04000**	17,45 **04000**	22,03 **04000**
5		16,36 **05000**	15,13 **05000**	16,22 **05000**	17,45 **05000**	22,03 **05000**
6		16,36 **06000**	15,13 **06000**	16,22 **06000**	17,45 **06000**	22,03 **06000**
7		16,36 **07000**	15,13 **07000**	16,22 **07000**	17,45 **07000**	22,03 **07000**
8		16,36 **08000**	15,13 **08000**	16,22 **08000**	17,45 **08000**	22,03 **08000**
9		16,36 **09000**	15,13 **09000**	16,22 **09000**	17,45 **09000**	22,03 **09000**
10		16,36 **10000**	15,13 **10000**	16,22 **10000**	17,45 **10000**	22,03 **10000**
11			15,13 **11000**	16,22 **11000**	17,45 **11000**	22,03 **11000**
12			15,13 **12000**	16,22 **12000**	17,45 **12000**	22,03 **12000**
13			15,13 **13000**	16,22 **13000**	17,45 **13000**	22,03 **13000**
14				16,22 **14000**	17,45 **14000**	22,03 **14000**
15				16,22 **15000**	17,45 **15000**	22,03 **15000**
16				16,22 **16000**	17,45 **16000**	22,03 **16000**
17					17,45 **17000**	22,03 **17000**
18					17,45 **18000**	22,03 **18000**
19					17,45 **19000**	22,03 **19000**
20					17,45 **20000**	22,03 **20000**
21						22,03 **21000**
22						22,03 **22000**
23						22,03 **23000**
24						22,03 **24000**
25						22,03 **25000**
26						22,03 **26000**
	Set in plastic case	181,30 **99900**	194,70 **99900**	255,60 **99900**	313,70 **99900**	530,00 **99900**

Clamping range covered: up to Ø 2 mm = 0.5 mm, from Ø 2.5 mm = 1 mm

ER collet with internal square

- ▲ Similar DIN ISO 15488-A (old DIN 6499-A)
- ▲ 8 times slotted
- ▲ Double taper collets for holding taps on synchronised spindle machines, without compensating lengths

ER-A
15 µm





	NEW		NEW		NEW		NEW	
	BD = 16,7 OAL = 27,5 426 E / ER16		BD = 25,7 OAL = 34 430 E / ER25		BD = 32,7 OAL = 40 470 E / ER32		BD = 40,7 OAL = 46 472 E / ER40	
	82 695 ...		**82 692 ...**		**82 693 ...**		**82 694 ...**	
DCONWS mm	EUR Y8		EUR Y8		EUR Y8		EUR Y8	
2,8	27,44	**02800**						
3,5	27,44	**03500**						
4,0	27,44	**04000**						
4,5	27,44	**04500**	42,86	**04500**	46,91	**04500**		
5,0	27,44	**05000**						
5,5	27,44	**05500**	42,86	**05500**	46,91	**05500**		
6,0	27,44	**06000**	42,86	**06000**	46,91	**06000**		
7,0	27,44	**07000**	42,86	**07000**	46,91	**07000**	56,11	**07000**
8,0	27,44	**08000**	42,86	**08000**	46,91	**08000**	56,11	**08000**
9,0	27,44	**09000**	42,86	**09000**	46,91	**09000**	56,11	**09000**
10,0			42,86	**10000**	46,91	**10000**	56,11	**10000**
11,0			42,86	**11000**	46,91	**11000**	56,11	**11000**
12,0			42,86	**12000**	46,91	**12000**	56,11	**12000**
14,0					46,91	**14000**	56,11	**14000**
16,0					46,91	**16000**	56,11	**16000**
18,0							56,11	**18000**
20,0							56,11	**20000**

Wooden boxes for collets

▲ For collets form A+B

Scope of supply:
empty wooden box

for collet	capacity	83 689 ... EUR Y8/3B	
4004E (ER08)	9	18,66	**008**
426E (ER16)	10	26,78	**116**
428E (ER20)	11	29,74	**020**
4008E (ER11)	13	18,66	**011**
430E (ER25)	14	33,39	**025**
470E (ER32)	18	33,39	**032**
472E (ER40)	24	42,04	**040**

ER wedge collet with pull out protection, for precision collet chucks – Centro-P – HDC

▲ Similar to DIN ISO 15488-A
▲ Slotted
▲ Double taper collet

ER
5 µm



BD = 32,7
OAL = 40
ER 32

83 629 ...

DCONWS mm		EUR Y8	
12		118,10	120
16		118,10	160

Conical spring

83 950 ...

Spare parts DCONWS		EUR Y8	
12	CP 32	5,95	455
16	CP 32	5,95	455

Tapping Collet Form ET (ER) with length compensation

- ▲ DIN ISO 15488 (old DIN 6499)
- ▲ With pull out length compensation (LTENS)
- ▲ The spring force is adapted to the thread size
- ▲ Anti-rotation by 2 and/or 4 clamping screws on the shank square drive

ER
10 µm



DCONWS mm	BD = 17 LTENS = 7 426 E / ER16 **80 661 ...** EUR Y7		BD = 21 LTENS = 7 428 E / ER20 **80 662 ...** EUR Y7		BD = 26 LTENS = 8 430 E / ER25 **80 663 ...** EUR Y7		BD = 33 LTENS = 10 470 E / ER32 **80 664 ...** EUR Y7		BD = 41 LTENS = 13 472 E / ER40 **80 665 ...** EUR Y7	
2,2	112,80	022	112,80	022						
2,5	112,80	025	112,80	025	118,00	025				
2,8	112,80	028	112,80	028	118,00	028				
3,0	112,80	030	112,80	030	118,00	030				
3,5	112,80	035	112,80	035	118,00	035				
4,0	112,80	040	112,80	040	118,00	040				
4,5	112,80	045	112,80	045	118,00	045	125,70	045		
5,0							125,70	050		
5,5	112,80	055	112,80	055	118,00	055	125,70	055		
6,0	112,80	060	112,80	060	118,00	060	125,70	060	145,20	060
7,0			112,80	070	118,00	070	125,70	070	145,20	070
8,0					118,00	080	125,70	080	145,20	080
9,0					118,00	090	125,70	090	145,20	090
10,0					118,00	100	125,70	100	145,20	100
11,0							125,70	110	145,20	110
12,0							125,70	120	145,20	120
14,0									145,20	140
16,0									145,20	160

When using CNC machines apply canned cycles with a feed rate or pitch of only 95 % with small threads and up to 99 % with large threads.
In this way when reversing the rotation of the spindle an optimum length compensation in both directions is guaranteed.

Sealing discs for precision collet chucks – Centro-P, ER-Standard and ER-Mini with thro' coolant

- ▲ For sealing when using tools with internal cooling
- ▲ Sealing range: nominal diameter –0,1 mm / +0,4 mm
- ▲ Can be applied up to 80 bar





	BD = 12,6 OAL = 2 426E (ER16)		BD = 15,8 OAL = 2 428E (ER20)		BD = 20,2 OAL = 2 430E (ER25)		BD = 26,2 OAL = 2 444E / OZ (ER32)		BD = 34,2 OAL = 2 472E (ER40)	
	83 690 ...		**83 694 ...**		**83 691 ...**		**83 692 ...**		**83 693 ...**	
DCONWS mm	**EUR** Y8		**EUR** Y8		**EUR** Y8		**EUR** Y8		**EUR** Y8	
1,0	23,61	**010**								
1,5	23,61	**015**								
2,0	23,61	**020**	24,49	**020**	23,61	**020**	24,49	**020**		
2,5	23,61	**025**	24,49	**025**	23,61	**025**	24,49	**025**		
3,0	19,31	**030**	20,10	**030**	19,31	**030**	20,10	**030**	24,49	**030**
3,5	19,31	**035**	20,10	**035**	19,31	**035**	20,10	**035**	24,49	**035**
4,0	19,31	**040**	20,10	**040**	19,31	**040**	20,10	**040**	24,49	**040**
4,5	19,31	**045**	20,10	**045**	19,31	**045**	20,10	**045**	24,49	**045**
5,0	19,31	**050**	20,10	**050**	19,31	**050**	20,10	**050**	24,49	**050**
5,5	19,31	**055**	20,10	**055**	19,31	**055**	20,10	**055**	24,49	**055**
6,0	19,31	**060**	20,10	**060**	19,31	**060**	20,10	**060**	24,49	**060**
6,5	19,31	**065**	20,10	**065**	19,31	**065**	20,10	**065**	24,49	**065**
7,0	19,31	**070**	20,10	**070**	19,31	**070**	20,10	**070**	24,49	**070**
7,5	19,31	**075**	20,10	**075**	19,31	**075**	20,10	**075**	24,49	**075**
8,0	19,31	**080**	20,10	**080**	19,31	**080**	20,10	**080**	24,49	**080**
8,5	19,31	**085**	20,10	**085**	19,31	**085**	20,10	**085**	24,49	**085**
9,0	19,31	**090**	20,10	**090**	19,31	**090**	20,10	**090**	24,49	**090**
9,5	19,31	**095**	20,10	**095**	19,31	**095**	20,10	**095**	24,49	**095**
10,0	19,31	**100**	20,10	**100**	19,31	**100**	20,10	**100**	24,49	**100**
10,5			20,10	**105**	19,31	**105**	20,10	**105**	24,49	**105**
11,0			20,10	**110**	19,31	**110**	20,10	**110**	24,49	**110**
11,5			20,10	**115**	19,31	**115**	20,10	**115**	24,49	**115**
12,0			20,10	**120**	19,31	**120**	20,10	**120**	24,49	**120**
12,5			20,10	**125**	19,31	**125**	20,10	**125**	24,49	**125**
13,0			20,10	**130**	19,31	**130**	20,10	**130**	24,49	**130**
13,5					19,31	**135**	20,10	**135**	24,49	**135**
14,0					19,31	**140**	20,10	**140**	24,49	**140**
14,5					19,31	**145**	20,10	**145**	24,49	**145**
15,0					19,31	**150**	20,10	**150**	24,49	**150**
15,5					19,31	**155**	20,10	**155**	24,49	**155**
16,0					19,31	**160**	20,10	**160**	24,49	**160**
16,5							20,10	**165**	24,49	**165**
17,0							20,10	**170**	24,49	**170**
17,5							20,10	**175**	24,49	**175**
18,0							20,10	**180**	24,49	**180**
18,5							20,10	**185**	24,49	**185**
19,0							20,10	**190**	24,49	**190**
19,5							20,10	**195**	24,49	**195**
20,0							20,10	**200**	24,49	**200**
20,5									24,49	**205**
21,0									24,49	**210**
21,5									24,49	**215**
22,0									24,49	**220**
22,5									24,49	**225**
23,0									24,49	**230**
23,5									24,49	**235**
24,0									24,49	**240**
24,5									24,49	**245**
25,0									24,49	**250**
25,5									24,49	**255**
26,0									24,49	**260**

Sealing rings for precision collet chucks – PCC

▲ For sealing when using tools with internal cooling
▲ Sealing range: nominal diameter –0,1 mm / +0,4 mm
▲ Can be applied up to 100 bar



DCONWS mm	BD = 13 OAL = 4 426E (ER16) 82 630 ...		BD = 21 OAL = 4 430E (ER25) 82 631 ...		BD = 27 OAL = 4 470E (ER32) 82 632 ...	
	EUR Y8		EUR Y8		EUR Y8	
3,0	21,84	03000	21,84	03000	21,84	03000
3,5	21,84	03500	21,84	03500	21,84	03500
4,0	21,84	04000	21,84	04000	21,84	04000
4,5	21,84	04500	21,84	04500	21,84	04500
5,0	21,84	05000	21,84	05000	21,84	05000
5,5	21,84	05500	21,84	05500	21,84	05500
6,0	21,84	06000	21,84	06000	21,84	06000
6,5	21,84	06500	21,84	06500	21,84	06500
7,0	21,84	07000	21,84	07000	21,84	07000
7,5	21,84	07500	21,84	07500	21,84	07500
8,0	21,84	08000	21,84	08000	21,84	08000
8,5	21,84	08500	21,84	08500	21,84	08500
9,0	21,84	09000	21,84	09000	21,84	09000
9,5	21,84	09500	21,84	09500	21,84	09500
10,0	21,84	10000	21,84	10000	21,84	10000
10,5			21,84	10500	21,84	10500
11,0			21,84	11000	21,84	11000
11,5			21,84	11500	21,84	11500
12,0			21,84	12000	21,84	12000
12,5			21,84	12500	21,84	12500
13,0			21,84	13000	21,84	13000
13,5			21,84	13500	21,84	13500
14,0			21,84	14000	21,84	14000
14,5			21,84	14500	21,84	14500
15,0			21,84	15000	21,84	15000
15,5			21,84	15500	21,84	15500
16,0			21,84	16000	21,84	16000
16,5					21,84	16500
17,0					21,84	17000
17,5					21,84	17500
18,0					21,84	18000
18,5					21,84	18500
19,0					21,84	19000
19,5					21,84	19500
20,0					21,84	20000

Reducing sleeves for hydraulic and high pressure chucks

▲ Thro' coolant to 80 bar



DCONMS mm	DCONWS mm	OAL mm	LCOL mm	LSC mm	83 609 ... EUR Y8	
12	3	40	36	29	137,80	103
12	4	40	36	29	137,80	104
12	5	40	36	29	137,80	105
12	6	40	36	36	137,80	106
12	8	40	36	37	137,80	108
20	3	54	50	28	128,60	203
20	4	54	50	28	128,60	204
20	5	54	50	28	128,60	205
20	6	54	50	36	100,30	206
20	8	54	50	37	100,30	208
20	10	54	50	40	100,30	210
20	12	54	50	45	100,30	212
20	14	54	50	45	100,30	214
20	16	54	50	48	100,30	216
25	6	60	56	37	121,50	256
25	8	60	56	37	121,50	258
25	10	60	56	40	121,50	260
25	12	60	56	46	121,50	262
25	14	60	56	47	121,50	264
25	16	60	56	48	121,50	266
25	18	60	56	48	121,50	268
25	20	60	56	50	121,50	270
32	6	64	60	36	128,60	306
32	8	64	60	36	128,60	308
32	10	64	60	40	128,60	310
32	12	64	60	45	128,60	312
32	14	64	60	46	128,60	314
32	16	64	60	48	128,60	316
32	18	64	60	49	128,60	318
32	20	64	60	50	128,60	320
32	25	64	60	56	128,60	325

Stop screw for use with reducing sleeves in hydraulic chuck



THOD	BD mm	DRVS mm	83 950 ... EUR Y7	
M4x0,5x26	2,8	2	10,67	425
M8x1x19	5,8	2,5	10,67	428
M10x1x16	5,8	3	10,67	426
M16x1x16	11,7	5	10,67	427

Reduction sleeves with coolant hole for hydraulic and high pressure chucks

▲ with coolant holes, for flexible diameter application



DCONMS mm	DCONWS mm	BD mm	OAL mm	LCOL mm	LSC mm	83 611 ... EUR Y8	
12	3	16	44	40	29	259,50	10300
12	4	16	44	40	29	259,50	10400
12	5	16	44	40	29	259,50	10500
12	6	16	44	40	36	259,50	10600
12	8	16	44	40	37	259,50	10800
20	3	25	54	50	28	163,40	20300
20	4	25	54	50	28	163,40	20400
20	5	25	54	50	28	163,40	20500
20	6	25	54	50	36	163,40	20600
20	8	25	54	50	37	163,40	20800
20	10	25	54	50	40	163,40	21000
20	12	25	54	50	45	163,40	21200
20	14	25	54	50	45	163,40	21400
20	16	25	54	50	48	163,40	21600
32	6	36	64	60	36	184,60	30600
32	8	36	64	60	36	184,60	30800
32	10	36	64	60	40	184,60	31000
32	12	36	64	60	45	184,60	31200
32	14	36	64	60	46	184,60	31400
32	16	36	64	60	48	184,60	31600
32	18	36	64	60	49	184,60	31800
32	20	36	64	60	50	184,60	32000
32	25	36	64	60	56	184,60	32500

Adaptation for the use of stop screws for reducing sleeves

DCONMS in mm			
12		83 950 425	83 950 426
20	83 950 425	83 950 428	83 950 427
25	83 950 425	83 950 428	83 950 427
32		83 950 428	83 950 427

Slotted reduction sleeves

▲ For cylindrical and other tool holders
▲ For tools with cylindrical shank

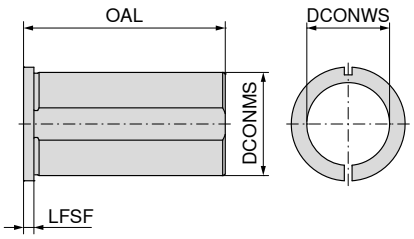

DCONMS mm	DCONWS mm	OAL mm	LFSF mm	83 271 ... EUR Y8	
20	6	30	4	73,02	206
20	8	30	4	57,18	208
20	10	30	4	57,18	210
20	12	30	4	57,18	212
20	15	30	4	57,18	215
20	16	30	4	57,18	216
25	6	40	4	78,69	256
25	8	40	4	61,25	258
25	10	40	4	61,25	260
25	12	40	4	61,25	262
25	15	40	4	80,17	265
25	16	40	4	61,25	266
25	20	40	4	61,25	270
32	6	50	4	80,56	326
32	8	50	4	61,25	328
32	10	50	4	61,25	330
32	12	50	4	61,25	332
32	15	50	4	61,25	335
32	16	50	4	61,25	336
32	20	50	4	61,25	340
40	10	78	4	73,96	410
40	12	78	4	73,96	412
40	15	78	4	73,96	415
40	16	78	4	73,96	416
40	20	78	4	73,96	420
40	25	78	4	73,96	425
40	32	78	4	73,96	432
50	20	88	4	99,21	520
50	25	88	4	99,21	525
50	32	88	4	99,21	532
50	40	88	4	99,21	540

Reduction sleeves for direct clamping

▲ For tools with cylindrical shank

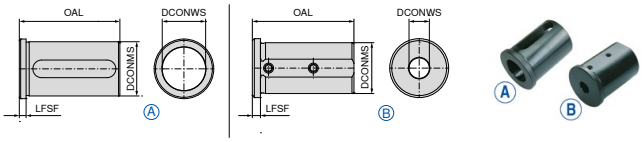

DCONMS mm	DCONWS mm	OAL mm	LFSF mm	Fig.	83 272 ... EUR Y8	
25	6	50	4	B	82,34	256
25	8	50	4	B	63,79	258
25	10	50	4	B	63,79	260
25	12	50	4	B	63,79	262
25	14	50	4	A	82,34	264
25	16	50	4	A	63,79	266
25	20	50	4	A	63,79	270
32	6	58	5	B	85,05	326
32	8	58	5	B	85,05	328
32	10	58	5	B	65,85	330
32	12	58	5	B	65,85	332
32	16	58	5	A	65,85	336
32	20	58	5	A	65,85	340
32	25	58	5	A	65,85	345
40	8	58	5	B	103,30	408
40	10	58	5	B	85,05	410
40	12	58	5	B	91,92	412
40	16	58	5	A	91,92	416
40	20	58	5	A	91,92	420
40	25	58	5	A	91,92	425
40	32	58	5	A	91,92	432
50	12	75	5	B	95,73	512
50	16	75	5	A	95,73	516
50	20	75	5	A	95,73	520
50	25	75	5	A	95,73	525
50	32	75	5	A	95,73	532
50	40	75	5	A	95,73	540

Taper wiper

▲ Version made from hard wood with felt inserts

Adapter	83 715 ... EUR Y8	
MK 1	7,60	001
MK 2	7,86	002
MK 3	10,48	003
MK 4	11,56	004
MK 5	17,04	005
HSK 32	55,71	320
HSK 40	59,06	400
HSK 50	60,02	500
HSK 63	70,15	630
HSK 80	90,57	800
HSK 100	106,40	100
SK 30	12,66	130
SK 40	13,91	140
SK 50	16,61	150

Assembly device for ISO adapters

▲ Aluminium

Adapter	80 720 ... EUR Y7	
SK 30	129,60	030
SK 40	129,60	040
SK 50	216,20	050

Assembly fixture for tool holders

▲ gripping by roller
▲ secure clamping
▲ quick assembly, no additional clamping necessary



Holder Type	DCONWS mm	80 722 ... EUR Y7	
HSK 32, PSC 32	32,0	201,00	032
HSK 40, PSC 40	40,0	201,00	040
MAS-BT 30	46,0	166,10	046
ISO 7388-1 / DIN 2080 - SK 30, HSK 50, PSC 50	50,0	166,10	050
ISO 7388-1 / DIN 2080 - SK 40, HSK 63, PSC 63, MAS-BT 40, ANSI-CAT 40	63,0	172,50	063
ISO 7388-1 - SK 50	97,5	321,40	097
HSK 100, MAS-BT 50, ANSI-CAT 50	100,0	321,40	100

Safety Note: The clamping devices must be free of oil and grease to avoid slipping!

ER Standard lock nut for precision collet chuck – Centro-P



for seals

for collet	DCONWS mm	DLN mm	TQX Nm	84 950 ... EUR Y8		84 950 ... EUR Y8	
426E (ER16)	1 - 10	30	80	36,28	001	45,38	011
430E (ER25)	2 - 16	40	90	40,16	003	49,29	013
470E (ER32)	2 - 20	50	180	42,72	005	51,87	015
472E (ER40)	3 - 26	63	200	58,34	007	70,01	017

Tapered lock nut for precision collet chuck – Centro-P



for seals

for collet	DCONWS mm	DLN mm	TQX Nm	84 950 ... EUR Y8		84 950 ... EUR Y8	
426E (ER16)	1 - 10	24	80	42,72	031	53,16	033

Mini lock nut for precision collet chuck – Centro-P



for seals

for collet	DCONWS mm	DLN mm	TQX Nm	84 950 ... EUR Y8		84 950 ... EUR Y8	
4004E (ER08)	1 - 5	10	5 - 8	49,26	040		
4008E (ER11)	1 - 7	16	10	42,72	041		
4008E (ER11)	Ø 3,0	16	10	81,67	042 [1)]		
4008E (ER11)	Ø 4,0	16	10	81,67	043 [1)]		
4008E (ER11)	Ø 5,0	16	10	81,67	044 [1)]		
4008E (ER11)	Ø 6,0	16	10	81,67	045 [1)]		
4008E (ER11)	Ø 7,0	16	10	81,67	046 [1)]		
426E (ER16)	1 - 10	22	30	42,72	034		
426E (ER16)	1 - 10	22	28			53,15	035

1) directly sealed

Collet removal aid for Mini lock nut for precision collet chuck – Centro-P

for collet	84 950 ... EUR Y8	
4004E (ER08)	25,45	070
4008E (ER11)	35,65	072

Roll key

▲ Version CP = for Centro-P lock nuts
▲ Version STD = for standard lock nuts
▲ Version HDC = for HDC lock nuts

for lock nut	DLN mm	84 950 ... EUR Y8	
4004E / ER08 CP mini	10	110,20	050 1)
4008E / ER 11 CP mini	16	77,76	080 1)
426E / ER 16 CP / ER 16 mini	22	77,55	026 1)
426E / ER 16 CP Conical	24	77,76	082 2)
426E / ER 16 CP	30	77,55	027
426E / ER 16 STD	32	77,55	028
430E / ER 25 CP	40	77,76	054
470E / ER 32 CP + STD	50	77,76	056
470E / ER 32 HDC	53	99,28	30200
472E / ER 40 CP + STD	63	85,55	057

1) Special key for mini lock nuts
2) Key for tapered lock nuts

Additional roll key device for torque key

▲ Version CP = for Centro-P lock nuts
▲ Version STD = for standard lock nuts
▲ Version HDC = for HDC lock nuts

for lock nut	DLN mm	TQX Nm	Square mm	84 950 ... EUR Y8	
4008E / ER 11 CP mini	16	5 - 30	9 x 12	77,76	060 1)
426E / ER 16 CP / ER 16 mini	22	5 - 30	9 x 12	77,55	170 1)
426E / ER 16 CP Conical	24	10 - 80	9 x 12	77,76	061 2)
426E / ER 16 CP	30	20 - 200	14 x 18	77,55	171
426E / ER 16 STD	32	20 - 200	14 x 18	77,55	172
430E / ER 25 CP	40	20 - 200	14 x 18	77,76	065
470E / ER 32 CP + STD	50	20 - 200	14 x 18	77,76	067
470E / ER 32 HDC	53	20 - 200	14 x 18	99,28	30300
472E / ER 40 CP + STD	63	20 - 200	14 x 18	85,55	068

1) For mini lock nuts
2) For tapered lock nuts

Torque key

TQX Nm	Square mm	84 435 ... EUR Y8	
5 - 30	9 x 12	188,10	030
10 - 80	9 x 12	221,20	080
20 - 200	14 x 18	224,90	200

Mini ER lock nut



for collet	THSZMS	DLN mm	HLN mm	TQX Nm	62 950 ... EUR W7	
4004E (ER08)	M10x0,75	12	11,0	8	32,31	067
4008E (ER11)	M13x0,75	16	12,0	18	31,50	065
426E (ER16)	M19x1	22	18,0	28	30,82	066
428E (ER20)	M24x1	28	19,5	35	34,74	068
430E (ER25)	M30x1	35	21,0	40	37,98	069

ER Lock nut



for seals

for collet	THSZMS	DLN mm	HLN mm	62 950 ... EUR W7		83 950 ... EUR Y8	
426E (ER16)	M22x1,5	32	17,0	22,96	054		
426E (ER16)	M22x1,5	32	22,0			39,48	054
428E (ER20)	M25x1,5	35	23,2			42,17	053
430E (ER25)	M32x1,5	42	20,0	25,68	055		
430E (ER25)	M32x1,5	42	24,7			51,29	055
470E (ER32)	M40x1,5	50	22,3	23,93	65600		
470E (ER32)	M40x1,5	50	27,0			54,43	056
472E (ER40)	M50x1,5	63	25,3	23,26	65700		
472E (ER40)	M50x1,5	63	30,7			64,23	057

Mini ER lock nut for sealing rings



for seals

for collet	THSZMS	DLN mm	HLN mm	TQX Nm	83 950 ... EUR Y8	
426E (ER16-DS)	M19x1	22	22,0	28	46,98	058
428E (ER20-DS)	M24x1	28	23,2	35	57,30	059
430E (ER25-DS)	M30x1	35	24,7	40	52,30	060

Y clamping key

for lock nut	83 357 ... EUR Y8	
ER 16	20,69	116
ER 20	21,34	12000
ER 25	22,85	125
ER 32	31,09	132
ER 40	34,22	140

ER Mini clamping key

for collet	83 950 ... EUR Y8	
4004E (ER08)	17,98	099
4008E (ER11)	19,61	100
426E (ER16)	20,81	101
428E (ER20)	23,52	102
430E (ER25)	26,37	103

ER Lock nut

▲ DRVS = Drive size



for collet	THSZMS	DRVS mm	DLN mm	HLN mm	62 950 ... EUR W7	
426E (ER16)	M22x1,5	25	28	18,0	22,96	044
428E (ER20)	M25x1,5	30	34	19,5	24,34	045

Quick change tap adapter with overload clutch

▲ Adapter with adjustable overload clutch
▲ for use with taps

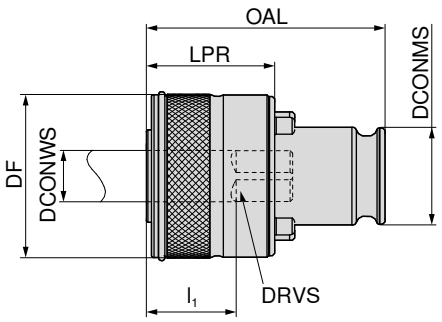

83 612 ...

SZID	DCONWS mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	l_1 mm	LPR mm	EUR Y8	
01	2,8	2,1	M2		33	19	46,5	17	25	66,12	**100**
01	2,8	2,1	M2,5		33	19	46,5	17	25	66,12	**101**
01	3,5	2,7	M3		33	19	46,5	17	25	66,12	**102**
01	4,0	3,0	M3,5		33	19	46,5	17	25	66,12	**103**
01	4,5	3,4	M4		33	19	46,5	17	25	66,12	**104**
01	6,0	4,9	M4,5		33	19	46,5	17	25	66,12	**105**
01	6,0	4,9	M5		33	19	46,5	17	25	66,12	**106**
01	4,5	3,4		M6	33	19	46,5	17	25	66,12	**107**
01	6,0	4,9	M6		33	19	46,5	17	25	66,12	**108**
01	5,5	4,3		M7	33	19	46,5	17	25	66,12	**109**
01	7,0	5,5	M7		33	19	46,5	17	25	66,12	**110**
01	6,0	4,9		M8	33	19	46,5	17	25	66,12	**111**
01	8,0	6,2	M8		33	19	46,5	17	25	66,12	**112**
01	9,0	7,0	M9		33	19	46,5	17	25	66,12	**113**
01	7,0	5,5		M10	33	19	46,5	17	25	66,12	**114**
01	10,0	8,0	M10		33	19	46,5	17	25	66,12	**115**
01	8,0	6,2		M11	33	19	46,5	17	25	66,12	**116**
01	9,0	7,0		M12	33	19	46,5	17	25	66,12	**117**
02	6,0	4,9	M4,5 - M6		50	31	69,0	30	34	85,97	**200**
02	6,0	4,9	M7 (DIN 352)		50	31	69,0	30	34	85,97	**201**
02	7,0	5,5	M7		50	31	69,0	30	34	85,97	**202**
02	6,0	4,9		M8	50	31	69,0	30	34	85,97	**203**
02	8,0	6,2	M8		50	31	69,0	30	34	85,97	**204**
02	9,0	7,0	M9		50	31	69,0	30	34	85,97	**205**
02	7,0	5,5		M10	50	31	69,0	30	34	85,97	**206**
02	10,0	8,0	M10		50	31	69,0	30	34	85,97	**207**
02	8,0	6,2		M11	50	31	69,0	30	34	85,97	**208**
02	9,0	7,0		M12	50	31	69,0	30	34	85,97	**209**
02	11,0	9,0		M14	50	31	69,0	30	34	85,97	**210**
02	12,0	9,0		M16	50	31	69,0	30	34	85,97	**211**
02	14,0	11,0		M18	50	31	69,0	30	34	85,97	**212**
02	16,0	12,0		M20	50	31	69,0	30	34	85,97	**213**

Quick change tap adapter with overload clutch, with through coolant

▲ Adapter with adjustable overload clutch
▲ for use with taps

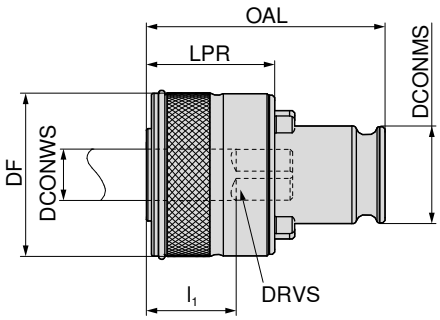

SZID	DCONWS mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	l_1 mm	LPR mm	83 616 ... EUR Y8	
01	3,5	2,7	M3	M4,5 - M5	33	19	46,5	17	25	114,10	100
01	4,5	3,4	M4	M6	33	19	46,5	17	25	114,10	102
01	5,5	4,3		M7	33	19	46,5	17	25	114,10	104
01	6,0	4,9	M4,5 - M6	M8	33	19	46,5	17	25	114,10	106
01	7,0	5,5	M7	M10	33	19	46,5	17	25	114,10	108
01	8,0	6,2	M8	M11	33	19	46,5	17	25	114,10	110
01	9,0	7,0	M9	M12	33	19	46,5	17	25	114,10	112
01	10,0	8,0	M10		33	19	46,5	17	25	114,10	114
01	11,0	9,0		M14	33	19	46,5	17	25	114,10	116
02	6,0	4,9	M4,5 - M6	M8	50	31	69,0	30	34	137,80	200
02	7,0	5,5	M7	M10	50	31	69,0	30	34	137,80	202
02	8,0	6,2	M8	M11	50	31	69,0	30	34	137,80	204
02	9,0	7,0	M9	M12	50	31	69,0	30	34	137,80	206
02	10,0	8,0	M10		50	31	69,0	30	34	137,80	208
02	11,0	9,0		M14	50	31	69,0	30	34	137,80	210
02	12,0	9,0	M12	M16	50	31	69,0	30	34	137,80	212
02	14,0	11,0		M18	50	31	69,0	30	34	137,80	214
02	16,0	12,0		M20	50	31	69,0	30	34	137,80	216

Quick change tap adapter

▲ Normal version without overload clutch
▲ For mounting taps
▲ For right-hand and left-hand threads

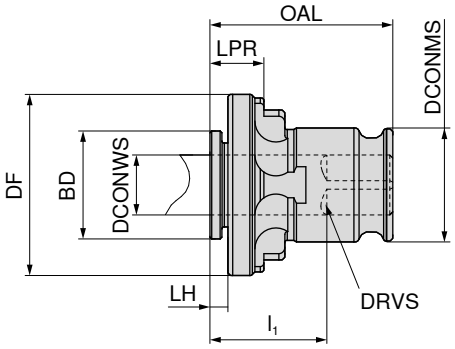

83 610 ...

SZID	DCONWS mm	BD mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	LH mm	l_1 mm	LPR mm	EUR Y8	
01	3,5	18	2,7	M3		30,2	19	31	3,5	17	9,5	26,49	**100**
01	4,5	18	3,4	M4		30,2	19	31	3,5	17	9,5	26,49	**101**
01	4,0	18	3,0	M3,5		30,2	19	31	3,5	17	9,5	26,49	**102**
01	2,8	18	2,1	M2 - M2,6		30,2	19	31	3,5	17	9,5	26,49	**103**
01	5,5	18	4,3		M7	30,2	19	31	3,5	17	9,5	26,49	**104**
01	6,0	18	4,9	M4,5 - M6	M8	30,2	19	31	3,5	17	9,5	26,49	**105**
01	7,0	18	5,5	M7	M10	30,2	19	31	3,5	17	9,5	26,49	**106**
01	8,0	18	6,2	M8	M11	30,2	19	31	3,5	17	9,5	26,49	**107**
01	9,0	18	7,0	M9	M12	30,2	19	31	3,5	17	9,5	26,49	**108**
01	10,0	18	8,0	M10		30,2	19	31	3,5	17	9,5	26,49	**109**
01	11,0	18	9,0		M14	30,2	19	31	3,5	17	9,5	26,49	**110**
02	6,0	26	4,9	M4,5 - M6		46,3	31	46	2,5	30	11,0	36,61	**200**
02	7,0	26	5,5	M7		46,3	31	46	2,5	30	11,0	36,61	**201**
02	8,0	26	6,2	M8		46,3	31	46	2,5	30	11,0	36,61	**202**
02	9,0	26	7,0	M9		46,3	31	46	2,5	30	11,0	36,61	**203**
02	10,0	26	8,0	M10		46,3	31	46	2,5	30	11,0	36,61	**204**
02	11,0	26	9,0		M14	46,3	31	46	2,5	30	11,0	36,61	**205**
02	12,0	26	9,0		M16	46,3	31	46	2,5	30	11,0	36,61	**206**
02	14,0	26	11,0		M18	46,3	31	46	2,5	30	11,0	36,61	**207**
02	16,0	26	12,0		M20	46,3	31	46	2,5	30	11,0	36,61	**208**
02	18,0	26	14,5		M22 - M24	46,3	31	46	2,5	30	11,0	36,61	**209**

Quick change tap adapter, with through coolant

▲ Normal version without overload clutch
▲ For mounting taps
▲ For right-hand and left-hand threads

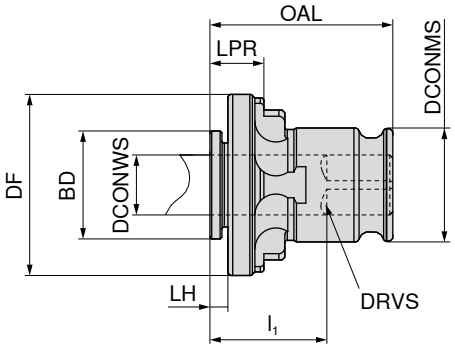

83 614 ...

SZID	DCONWS mm	BD mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	LH mm	l_1 mm	LPR mm	EUR Y8	
01	3,5	18	2,7		M4,5 - M5	30,2	19	31	3,5	17	9,5	51,38	**100**
01	4,5	18	3,4	M4	M6	30,2	19	31	3,5	17	9,5	51,38	**102**
01	5,5	18	4,3		M7	30,2	19	31	3,5	17	9,5	51,38	**104**
01	6,0	18	4,9	M4,5 - M6	M8	30,2	19	31	3,5	17	9,5	51,38	**106**
01	7,0	18	5,5	M7	M10	30,2	19	31	3,5	17	9,5	51,38	**108**
01	8,0	18	6,2	M8	M11	30,2	19	31	3,5	17	9,5	51,38	**110**
01	9,0	18	7,0	M9	M12	30,2	19	31	3,5	17	9,5	51,38	**112**
01	10,0	18	8,0	M10		30,2	19	31	3,5	17	9,5	51,38	**114**
02	6,0	26	4,9	M4,5 - M6	M8	46,3	31	46	2,5	30	11,0	67,86	**200**
02	7,0	26	5,5	M7	M10	46,3	31	46	2,5	30	11,0	67,86	**202**
02	8,0	26	6,2	M8	M11	46,3	31	46	2,5	30	11,0	67,86	**204**
02	9,0	26	7,0	M9	M12	46,3	31	46	2,5	30	11,0	67,86	**206**
02	10,0	26	8,0	M10		46,3	31	46	2,5	30	11,0	67,86	**208**
02	11,0	26	9,0		M14	46,3	31	46	2,5	30	11,0	67,86	**210**
02	12,0	26	9,0	M12	M16	46,3	31	46	2,5	30	11,0	67,86	**212**
02	14,0	26	11,0		M18	46,3	31	46	2,5	30	11,0	67,86	**214**
02	16,0	26	12,0		M20	46,3	31	46	2,5	30	11,0	67,86	**216**

Reducing adapter for quick change adapters

▲ Reducing adapter for reducing size 02 to 01. In this way the clamping ranges can be extended to smaller sizes.

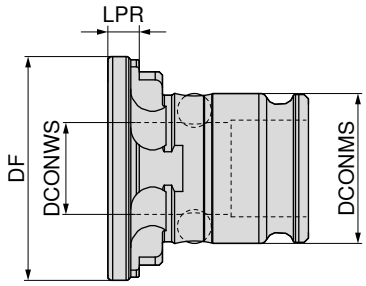

83 624 ...

SZID	DF mm	DCONMS mm	DCONWS mm	LPR mm	EUR Y8	
02	46	31	19	8,5	87,60	**200**

16

Quick change tap adapters

▲ Adapters for collets ER 16 / ER 25

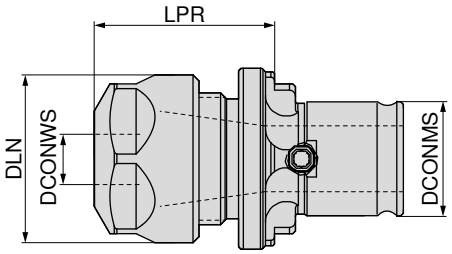

SZID	DCONWS mm	DLN mm	DCONMS mm	LPR mm	for collet	83 618 ... EUR Y8	
01	1 - 10	28	19	29,5	ER 16	110,90	010 1)
02	2 - 16	42	31	38,5	ER 25	156,80	016

1) with 6 position lock nut

Quick change adapter for dies

▲ For mounting dies according to DIN 223

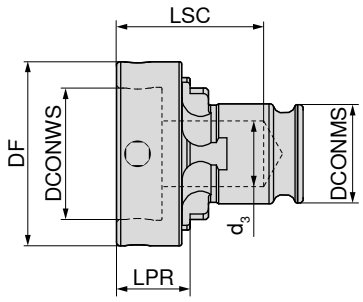

SZID	for size	DF mm	DCONMS mm	DCONWS mm	LPR mm	d_3 mm	LSC mm	83 622 ... EUR Y8	
01	16 x 5	25	19	16	9	12,5	23	122,50	116
01	20 x 5	30	19	20	9	12,5	23	122,50	120
01	20 x 7	30	19	20	11	12,5	25	122,50	121
01	25 x 9	35	19	25	14	12,5	28	122,50	125
01	38 x 10	48	19	38	15	14,2	29	122,50	138
01	30 x 11	40	19	30	16	12,5	30	122,50	130
01	38 x 14	48	19	38	19	14,2	33	122,50	139
02	20 x 5	30	31	20	22	15,0	57	171,70	220
02	20 x 7	30	31	20	22	15,0	57	171,70	221
02	25 x 9	35	31	35	22	15,0	57	171,70	225
02	38 x 10	48	31	38	22	22,0	57	171,70	238
02	30 x 11	40	31	30	22	22,0	57	171,70	230
02	38 x 14	48	31	38	25	22,0	60	171,70	239
02	45 x 14	57	31	45	29	22,0	64	171,70	245
02	45 x 18	57	31	45	29	22,0	64	171,70	246

MultiChange – Spanner

DRVS mm	TQX Nm	84 357 ... EUR Y8	
6	5	8,73	006
8	12,5	8,96	008
10	15	10,07	010
13	20	10,89	013
16	25	14,61	016
19	25	19,09	019 1)
21	25	20,97	021 1)
24	25	22,02	024 1)

1) only for MultiChange reamers

MultiChange – Spanner Head

DRVS mm	TQX Nm	Square mm	84 358 ... EUR Y8	
6	5	9 x 12	62,86	006
8	12,5	9 x 12	62,86	008
10	15	9 x 12	62,86	010
13	20	9 x 12	62,86	013
16	25	9 x 12	62,86	016
19	25	9 x 12	131,30	190
19	25	14 x 18	111,70	019 1)
21	25	9 x 12	184,30	210
21	25	14 x 18	136,70	021 1)
24	25	9 x 12	184,30	240
24	25	14 x 18	136,70	024 1)

1) only for MultiChange reamers

Suitable torque keys can be found on → **Page 286**.

Assembly instructions for MultiChange head

- ▲ Cleaning of cone, thread and face of the milling head
- ▲ Cleaning of cone and thread face of the holder
- ▲ Cleaning of cone, thread and face of the holders
- ▲ Cutter head screwed clockwise by hand into the holder (be careful if using gloves)
- ▲ Clamp the exchange milling head with the torque wrench and the correct spanner to the specified tightening torque (according to table).
- ▲ The gap between the head and holder must be closed (force and positive connection)

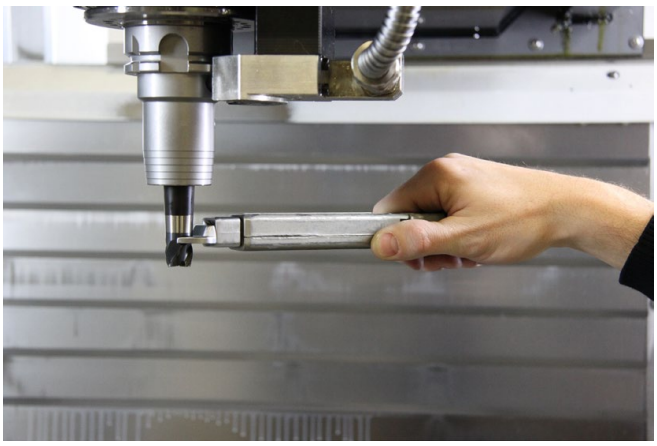

Torque wrench must be horizontally aligned to key area, take care not to tilt in the key area

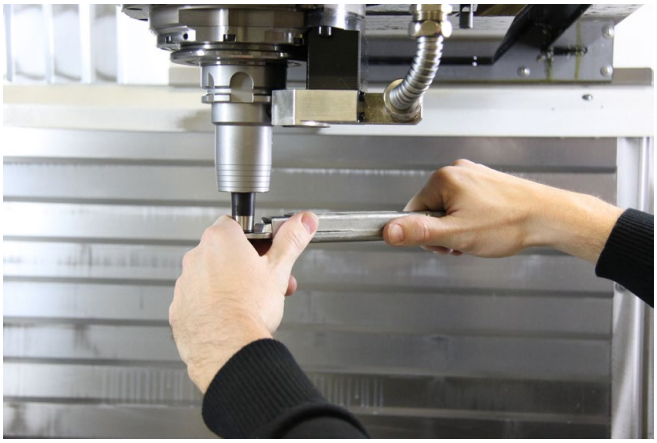

Important for the sensitive tuning is an additional placing of the hand on the exchange milling head. This means the torque can be better maintained.

TORX® Screwdriver

Size	LB mm	TQX Nm	80 950 ... EUR Y7	
T05	35	0,5	4,98	082
T06	35	0,9	4,91	083
T07	35	1,7	4,91	084
T08	40	2,6	4,91	085
T09	40	3,4	5,34	086
T10	40	4,5	5,34	087
T15	45	7,7	5,74	088
T20	45	12,7	6,27	089

TORX® Screwdriver sets

Size	80 950 ... EUR Y7	
T06, T07, T08, T09, T10, T15, T20	48,79	090

TORX PLUS® Screwdriver

Size	LB mm	TQX Nm	80 950 ... EUR Y7	
T05-IP	35	0,5	7,81	057
T06-IP	35	0,9	7,81	058
T07-IP	35	1,7	7,74	059
T08-IP	40	2,6	7,61	060
T09-IP	40	3,4	8,19	061
T10-IP	40	4,5	8,19	062
T15-IP	45	7,7	8,70	063
T20-IP	45	12,7	9,65	064

TORX PLUS® Screwdriver sets

Size	80 950 ... EUR Y7	
T06IP, T07IP, T08IP, T09IP, T10IP, T15IP, T20IP	70,14	091

Clamping key

DRVS mm	TQX Nm	80 397 ... EUR Y7	
2	1,9	5,04	020
2,5	3,8	5,12	025
3	6,6	4,97	030
4	16	5,04	040
5	30	5,46	050
6	52	6,35	060
8	120	7,78	080
10	220	12,97	100

Allen keys with cross handle – set

▲ 7-piece Allen key set in workbench stand

Size	80 397 ... EUR Y7	
SW2, SW2,5, SW3, SW4, SW5, SW6, SW8	49,06	99900

TORX® Screwdriver

Size	LB mm	80 950 ... EUR Y7	
T06	60	8,20	100
T07	60	8,20	101
T08	60	8,20	102
T09	60	8,86	103
T10	80	9,08	104
T15	80	9,08	105
T20	100	9,69	106
T25	100	10,23	107
T30	115	11,34	092

TORX PLUS® Screwdriver

Size	LB mm	80 950 ... EUR Y7	
T06-IP	60	10,45	116
T07-IP	60	10,26	117
T08-IP	60	8,11	039
T09-IP	60	11,13	118
T10-IP	80	11,50	119
T15-IP	80	11,79	120
T20-IP	100	12,62	121
T25-IP	100	13,25	122

TORX® MagicSpring®

Size	LB mm	80 950 ... EUR Y7	
MS T06	60	10,87	108
MS T07	60	10,05	109
MS T08	60	10,05	110
MS T09	60	11,45	111
MS T10	80	11,78	112
MS T15	80	11,96	113
MS T20	100	12,83	114
MS T25	100	13,18	115
MS T30	100	15,60	131

TORX PLUS® MagicSpring®

Size	LB mm	80 950 ... EUR Y7	
MS T06-IP	60	13,39	123
MS T07-IP	60	13,18	124
MS T08-IP	60	13,16	125
MS T09-IP	60	14,50	126
MS T10-IP	80	14,91	127
MS T15-IP	80	15,33	128
MS T20-IP	100	16,17	129

A stainless steel spring holds MagicSpring® Torx® and Torx Plus® screws in place.

TorqueFix® Handle

- ▲ with fixed torque moment
- ▲ Standard: EN ISO 6798, BS EN 26789, ASME B107.14M
- ▲ Accuracy: ± 6 %, based on national standards
- ▲ Bits to be clamped in the universal holder only

TQX Nm	80 021 ... EUR Y7	
0,4	126,30	00400
0,5	126,30	00500
0,6	126,30	006
0,7	110,80	007
0,8	113,40	008
0,9	126,30	00900
1	113,40	010
1,1	125,10	01100
1,2	125,10	012
1,5	125,10	01500
1,6	125,10	016
2	125,10	020
2,5	125,10	02500
3	132,20	030
3,2	132,20	032
3,8	132,20	03800
4	132,20	040
5	132,20	050
5,5	147,60	055
6	147,60	060
7,2	147,60	07200

TorqueFix® key

- ▲ With fixed torque
- ▲ Ergonomic key handle, extremely easy to use thanks to compact design
- ▲ Specially designed for difficult to access screws and constricted openings
- ▲ Click signal when the set torque value is reached
- ▲ Standards: DIN EN ISO 6789
- ▲ Accuracy: ± 6%, traceable to national standards

Scope of supply:
incl. Plastic box and inspection report

TQX Nm	DRVS mm	80 392 ... EUR Y7	
0,5	4	50,24	00500
0,6	4	50,24	00600
0,9	4	50,24	00900
1,1	4	50,24	01100
1,2	4	50,24	01200
1,4	4	50,24	01400
2,0	4	50,24	02000
2,5	4	50,24	02500
3,0	4	50,24	03000
3,8	4	50,24	03800
4,0	4	50,24	04000

easyTorque® Handle

- ▲ with a fixed torque
- ▲ Accuracy: ± 10%
- ▲ Bits can only be clamped in the universal holder

NEW

TQX Nm	DRVS mm	BD mm	OAL mm	WT kg	80 024 ... EUR Y7	
0,5	4	34	130	0,950	51,21	00500
0,6	4	34	130	0,950	51,21	00600
0,9	4	34	130	0,940	51,21	00900
1,1	4	34	130	0,101	51,21	01100
1,2	4	34	130	0,990	51,21	01200
1,4	4	34	130	0,101	51,21	01400
2,0	4	34	130	0,101	53,51	02000
2,5	4	34	130	0,106	53,51	02500
3,0	4	34	130	0,104	53,51	03000
3,8	4	34	130	0,105	53,51	03800
4,0	4	34	130	0,105	54,84	04000
4,5	4	34	130	0,105	54,84	04500
5,0	4	34	130	0,105	54,84	05000

TorqueVario®-S

- ▲ Patented handle

Scope of supply:
incl. Torque-Setter setting tool

TQX Nm	80 950 ... EUR Y7	
0,4 - 1,0	164,40	046
0,5 - 2,0	153,30	191
0,8 - 5,0	165,90	192
2,0 - 7,0	170,10	193

Universal holder for Bits

- ▲ 162 mm long

for	80 950 ... EUR Y7	
DIN3126-C/E 6,3-1/4"	25,04	014

Interchangeable blade for hex drive

Size	TQX Nm	short 75 mm 80 393 ... EUR Y7		long 175 mm 80 950 ... EUR Y7	
SW1,5	0,9	4,11	01500	7,21	151
SW2	1,8	4,11	02000	7,21	152
SW2,5	3,8	4,11	02500	7,21	153
SW3	5,5	4,11	03000	7,21	154
SW4	8,0	4,11	04000	7,21	155

Replaceable Blade for TORX®

Size	TQX Nm	short 75 mm 80 394 ... EUR Y7		long 175 mm 80 950 ... EUR Y7	
T05	0,4			7,60	048
T06	0,6	4,11	00600	6,13	031
T07	0,9	4,11	00700	6,13	032
T08	1,3	4,11	00800	6,13	033
T09	2,5	4,11	00900	6,13	034
T10	3,8	4,11	01000	6,13	035
T15	5,5	4,11	01500	6,13	036
T20	8,0	4,11	02000	6,13	037
T25	8,0	4,11	02500	6,13	038

Replaceable Blade for TORX PLUS®

Size	TQX Nm	long 175 mm 80 950 ... EUR Y7	
T05-IP	0,5	6,78	049
T06-IP	0,8	6,78	050
T07-IP	1,3	6,78	051
T08-IP	2,0	6,13	043
T09-IP	3,0	6,78	052
T10-IP	4,5	6,78	053
T15-IP	6,6	6,78	054
T20-IP	8,0	6,78	055
T25-IP	8,0	6,78	056

Interchangeable blade, short 75 mm, suitable for TorqueFix® Key article number 80 392 ...→ **Page 296**.

Interchangeable blade, long 175 mm, suitable for TorqueFix® Grip article number 80 021 ... and TorqueVario®-S article number 80 950 ... → **Page 296**.

TORX® Bits short (25 mm)

▲ DIN3126-C 6,3 – 1/4"

Size	TQX Nm	80 950 ... EUR Y7	
T06	0,9	1,18	015
T07	1,7	1,18	016
T08	2,6	1,18	017
T09	3,4	1,18	018
T10	4,5	1,18	019
T15	7,7	1,18	020
T20	12,7	1,18	021
T25	19	1,18	022
T30	37,4	1,23	093

TORX® Bits long (50 mm)

▲ DIN3126-E 6,3 – 1/4"

Size	TQX Nm	80 950 ... EUR Y7	
T06	0,9	4,31	023
T07	1,7	4,31	024
T08	2,6	4,31	025
T09	3,4	4,31	026
T10	4,5	4,31	027
T15	7,7	4,31	028
T20	12,7	4,31	029
T25	19	4,31	030
T30	37,4	5,78	094

TORX PLUS® Bits short (25 mm)

▲ DIN3126-C 6,3 – 1/4"

Size	TQX Nm	80 950 ... EUR Y7	
T08-IP	2,6	3,49	068
T09-IP	3,4	3,49	069
T10-IP	4,5	3,49	070
T15-IP	7,7	3,49	071
T20-IP	12,7	3,49	072
T25-IP	19	3,49	073

TORX PLUS® Bits long (50 mm)

▲ DIN3126-E 6,3 - 1/4"

Size	TQX Nm	80 950 ... EUR Y7	
T08-IP	2,6	6,35	040
T09-IP	3,4	6,78	077
T10-IP	4,5	6,78	078
T15-IP	7,7	6,78	079
T20-IP	12,7	6,78	080
T25-IP	19	6,78	081

Bit – hexagonal (50 mm)

▲ DIN3126-E 6,3 - 1/4"

Size	80 398 ... EUR Y7	
SW1,5	6,57	01500
SW2	6,57	02000
SW2,5	6,57	02500
SW3	5,97	03000
SW3,5	6,64	03500
SW4	4,90	04000
SW4,5	6,64	04500
SW5	5,97	05000
SW6	4,90	06000
SW8	10,33	08000

TORX PLUS® Allen key

Size	OAL mm	80 951 ... EUR Y7	
T07-IP	44	7,63	00700
T08-IP	47	7,63	00800
T09-IP	51	7,63	00900
T10-IP	54	7,80	01000
T15-IP	58	7,88	01500
T20-IP	62	8,38	02000
T25-IP	67	8,83	02500
T27-IP	73	9,17	02700
T30-IP	79	9,88	03000
T40-IP	88	11,28	04000

Universal 3D-tester

- ▲ Quick and accurate positioning
- ▲ For locating and/or setting the zero point of the workpiece
- ▲ with adjustable concentricity
- ▲ Usable in all 3 axes (x, y, z)
- ▲ For all CNC and erosion machines (insulation between stylus and case)
- ▲ Reading of actual dimensions is independent of direction
- ▲ Reading precision 0.01 mm

Scope of supply:
3D tester including tracer insert and Allen key

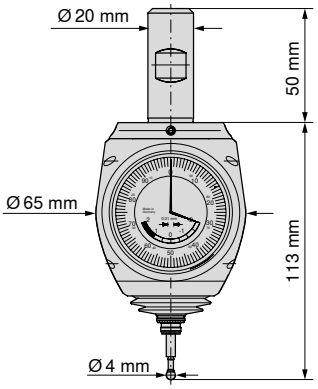

	85 290 ...	
	EUR	
	XX	
Universal-3D-Tester	449,40	100

Digital 3D tester

- ▲ Quick and accurate positioning
- ▲ For locating and/or setting the zero point of the workpiece
- ▲ with adjustable concentricity
- ▲ Usable in all 3 axes (x, y, z)
- ▲ For all CNC and erosion machines (insulation between stylus and case)
- ▲ Reading of actual dimensions is independent of direction
- ▲ Reading precision 0.001 mm

Scope of supply:
3D tester including tracer insert and Allen key

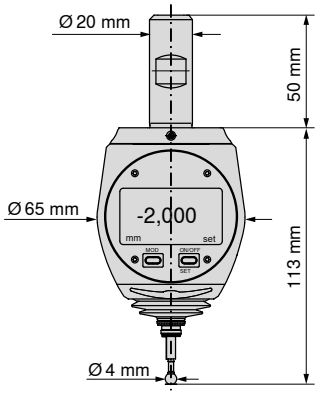

	85 291 ...	
	EUR	
	XX	
Digital 3D Tester	902,50	100

Zero height setting gauge

- ▲ to determine the point of reference and/or for adjusting tools „to zero“
- ▲ Plate Ø 10 mm
- ▲ Plate is hardened, non magnetic

	85 900 ...	
OAH mm	EUR	
	Y7	
100	169,00	018

Stylus for 3D-tester

- ▲ With movement of 2 mm beyond the zero point
  a break-off ceramic insert prevents damage to the unit
- ▲ If the stylus is broken remove and insert a new stylus
- ▲ Check concentricity and adjust if necessary



	85 290 ...	
LPR mm	EUR	
	XX	
25	35,05	102
65	56,57	104

Universal 3D-Tester HQ

- ▲ fast and accurate positioning at reference edges
- ▲ Development of the existing universal 3D-Testers
- ▲ improved mechanics
- ▲ compact size
- ▲ characterised by over travel safety
- ▲ Functionality as with 85 290 100
- ▲ Accuracy 0,01 mm

Scope of supply:
3D tester including tracer insert and Allen key



	85 292 ...
	EUR XX
Universal 3D-Tester HQ	449,40 100

Universal 3D-Tester Mini

- ▲ fast and accurate positioning at reference edges
- ▲ very small universal 3D-Tester
- ▲ particularly suitable for machines with small spindle taper e.g. SK 30 or HSK 32
- ▲ low overhang length thanks to short housing
- ▲ characterised by over travel safety
- ▲ Functionality as with 85 290 100
- ▲ Accuracy 0,01 mm

Scope of supply:
3D tester including tracer insert and Allen key



	85 295 ...
	EUR XX
Universal 3D-Tester Mini	449,40 100

Centre finder

- ▲ Centralise holes and features quickly and accurately
- ▲ simple operation
- ▲ Dial gauge remains in the operators vision during process
- ▲ Centring accuracy 0,003 mm

Scope of supply:
3D-Tester incl. straight stylus and telescopic stop

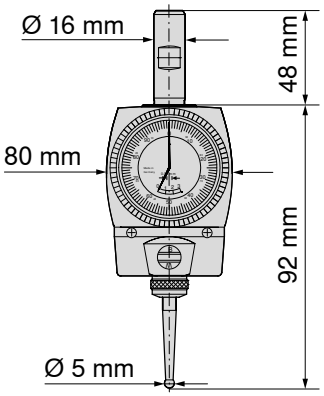

	85 299 ...
	EUR XX
Centre finder	594,40 100

Range with probe tip Ø 5 mm holes
Ø 6–125 mm, shaft Ø 0–125 mm

Stylii for Centre Finder



	85 299 ...
	EUR XX
Straight stylus / Ball-Ø 2 mm	55,20 102
Straight stylus / Ball-Ø 5 mm	41,43 104
Curved stylus / Ball Ø 5 mm	53,45 106

Telescopic rod for Centre Finder

DCONMS mm	OAL mm	85 299 ...
		EUR XX
6	478	18,52 111

Advantages with the use of the cool air nozzle

The main advantages are that cooling agent disposal is not required and tool life increases up to 100 % when dry machining

In order to improve the service life when dry machining, we recommend the use of our cooling nozzle, which is applicable with a normal compressed air connection from a pressure of 6 bar.

Not only for**cooling the tool and workpiece** it is primarily**for chip removal** to preventchip **jamming**.

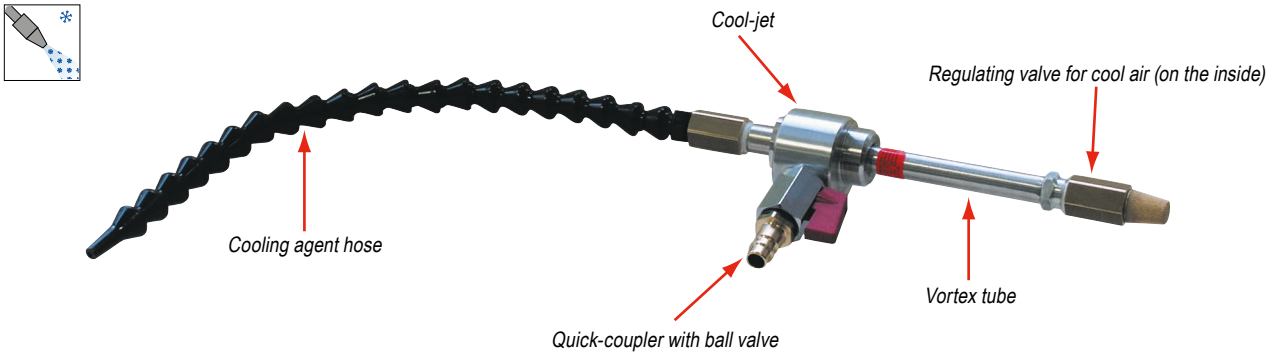

Cool-jet	81 900 ... EUR Y7	
3–7 bar air pressure, at -46 °C	753,00	100

Accessories	81 900 ... EUR Y7	
Magnetic plate Ø 80 mm without clamping arm	40,01	101
Spare tube, length 300 mm	40,01	104
Jet silencer (air filter)	7,79	105
Clamping arm, length 75 mm	118,30	106
Complete set (with magnetic set and clamping arm), weight 0,4 kg	154,20	107

Technical description – operating instruction

The principle of the cold-air nozzle is based on the use of vortex tubes. Ordinary air is divided into cold and hot air streams.

Without additional power supply or moving parts the cool air nozzle can produce**cooling performance of up to 733 W** or **Temperatures of approx. -42 °C** are produced and requires only operating pressure air of approx. 6 bar.

A water trap or service unit should be mounted. A regulating valve in the hot-air outlet regulates the temperatures and currents

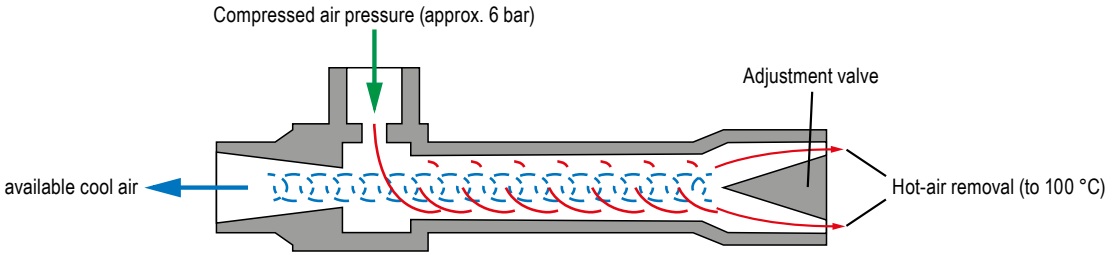

Utilizable air temperature measured at the effective discharge of the vortex tube (not the nozzle end)

Air consumption at an inlet temperature of +21 °C and an inlet pressure of 6.9 bar: 7,08 l / sec. (25.5 m³ / h)

Entrance pressure				
	3 bar	-31 °C	up to	-6 °C
	4 bar	-35 °C	up to	-8 °C
	5 bar	-39 °C	up to	-10 °C
	6 bar	-42 °C	up to	-11 °C
	7 bar	-46 °C	up to	-13 °C

In order to operate the regulating valve, the silencer must be unscrewed – there is a burn danger! The valve of the hot air side can reach up to 100 °C: Before contact, allow cooling!

16

Cleaning propeller

▲ Chip and emulsion removal or drying processes via the tool spindle
▲ Simple replacement of the rotor blades

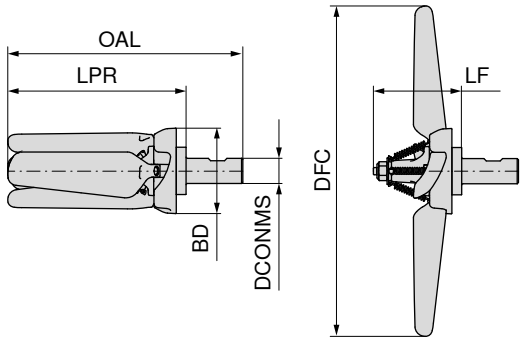

IK central

DCONMS	OAL	LPR	LF	DFC	BD	RPMX	80 399 ... EUR Y7	
mm	mm	mm	mm	mm	mm	1/min.		
20	186,3	141,3	69,75	254	67,68	5000 - 8000	221,20	02000

Cleaning propeller

▲ Chip and emulsion removal or drying processes via the tool spindle
▲ Simple replacement of the rotor blades

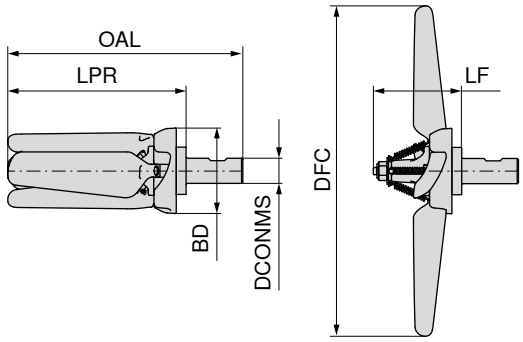

IK central

DCONMS	OAL	LPR	LF	DFC	BD	RPMX	80 399 ... EUR Y7	
mm	mm	mm	mm	mm	mm	1/min.		
20	135	90	70	160	68	6000 - 12000	217,00	16000

Rotor blade kit

1 rotary blade and 1 tension spring

4 rotary blades and 4 tension springs

Size	80 399 ... EUR Y7		80 399 ... EUR Y7	
Large	27,13	30100	104,80	30200
Small	26,08	36000	100,70	46000

Driven Tools

CERATIZIT offers a comprehensive portfolio of driven tool holders for the turrets or machines of leading manufacturers. There is almost no limit to the range of types available. You will find a small selection of our holders here.

Examples from our driven tooling range

Axial drilling and milling head

Radial drilling and milling head

Rear offset radial drilling and milling head

Double radial drilling and milling head

Double axial drilling and milling head

Offset axial drilling and milling head

Swivel head

Modular milling

Summary of machine turret manufacturers and interfaces for which CERATIZIT can supply driven tools

- ▲ Sauter
- ▲ Baruffaldi
- ▲ Duplomatic
- ▲ DIN1809
- ▲ DIN5480
- ▲ DIN5482
- ▲ Baruffaldi Toem
- ▲ Bevel gear milling
- ▲ Spline / tooth
- milling
- ▲ BMT (bolt on)

Technical Advice

Are you interested in our driven tools ? If so please contact your technical sales engineer who will be glad to assist you. Alternatively, you can contact our office based internal technical sales engineers who can be reached on our freephone number.

Enquiry Form

Should you have questions about driven tools you can find a detailed questionnaire on our website in the download area. Carefully complete the form and send it via e-mail or printed fax
→ **cutting.tools/en/download**

16

Modular quick-change system for driven tools

You want to optimize your setup time? CERATIZIT offers you several options! With each axial and radial driven tool you are prepared through the exchange of different modules for different machining demands.

Varia VX

The new quick change system for heavy duty machining

The face & taper contact interface ensures maximum concentricity.
The torque is transmitted via a form-fitting polygon, which can transmit up to 200 Nm.

Clamping and releasing takes place via a segmented gear wheel equipped with 3 multifunctional cams. When tightened with a radially mounted clamping screw, the 3-point clamping pulls the tool evenly into its operating position. When releasing the tool force is applied mechanically via a sliding cam and the tool is released for removal from the adapter.

The advantages at a glance

- ▲ Cutting tools are preset off the machine
- ▲ Quick change thanks to only one clamping point
- ▲ No risk of injury when changing tools
- ▲ Transverse force-free clamping of the tools
- ▲ Safe torque transmission
- ▲ No loose parts

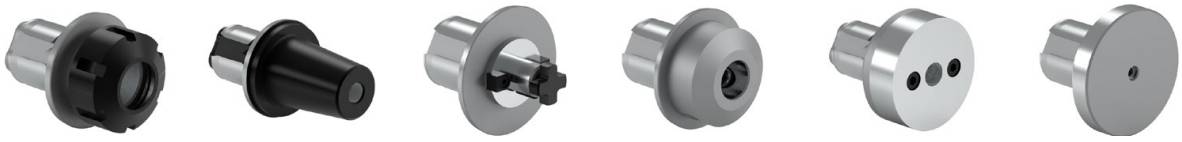

System Preci-Flex® – The stable solution for long tool life and high surface quality

The internal cone of the driven tool is suitable for any commercial type ER collets. Through taper & face contact ≤ 0.01 mm system concentricity and ≤ 0.005 mm repeatability is achieved and four plane-side clamp screws achieve maximum system stability and rigidity.



The program includes base holders for the collet sizes ER20, ER25, ER32, ER40 and ER50 and collet holders with male or female nut, adapters Weldon, Whistle Notch, shrink, boring bars, Shell mill arbors, hydraulic chucks, Test arbors and blanks. Also available for static VDI holders and rotating SK and HSK holders.

Quick-Change

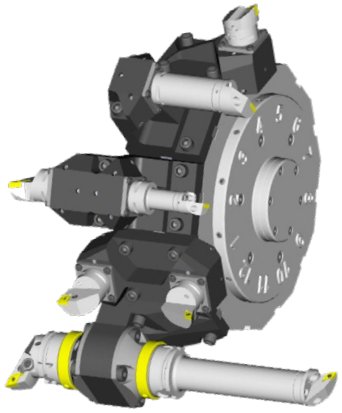

The tool holder range comprises both innovative and technologically proven solutions for all common CNC turning centres. We offer solutions that are perfectly tailored to the make of machine, regardless of whether the machine has a BMT, VDI or other connection type.

Every quick-change system has a standardised interface to DIN/ISO requirements and is available for HSK-T 40/63/100 and PSC 40/50/63 sizes. The tool change itself is carried out quickly and easily, minimising idle times and thus boosting productivity.



Tool holder single and straight



Tool holder double and straight



Single angle tool holder



Double angle tool holder

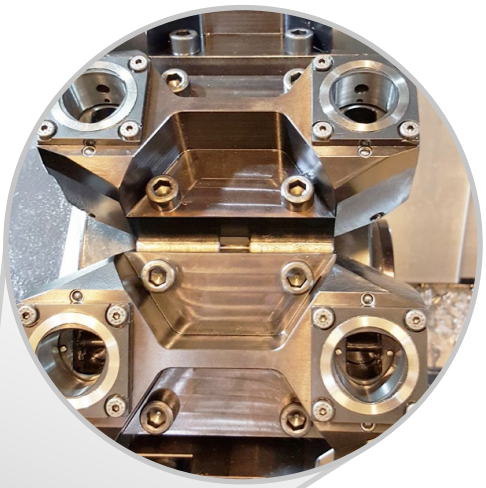

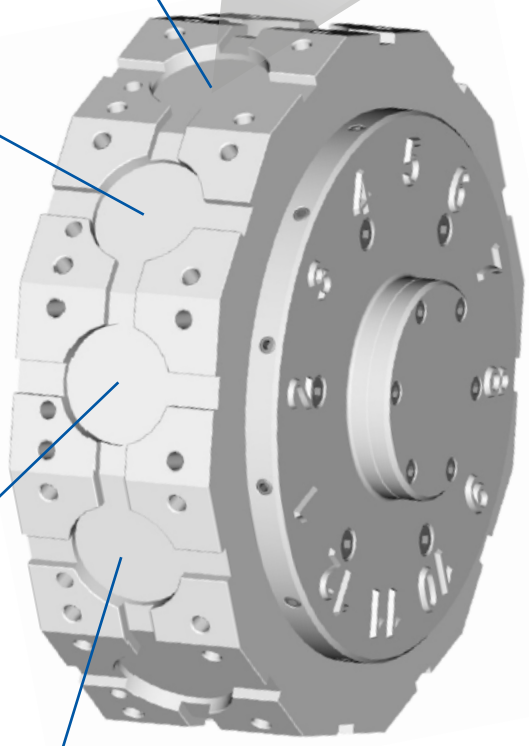

Revolverdisk BMT/VDI/...

16

HSK/PSC clamping units

The tool holders are fitted with either an HSK or PSC clamping unit.

Clamping units are available in sizes HSK 40/63/100 and PSC 40/50/63.

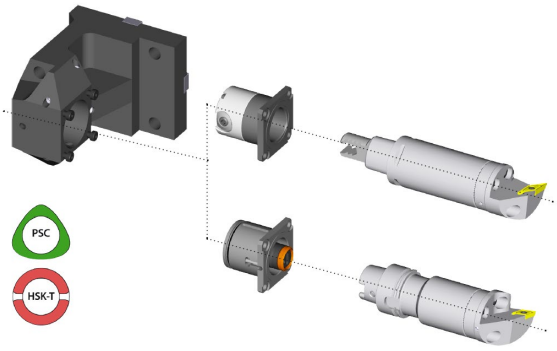

The toolholders permit the flexibility to be adapted to the customer's requirements.

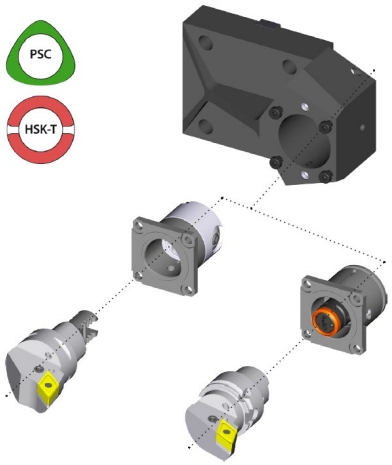

Online database

Our quick-change tool holders are individually adapted to turning machines to ensure the greatest-possible levels of flexibility and efficiency. Using the online database, systems of previously specified machine types can be evaluated in order to obtain an initial overview.

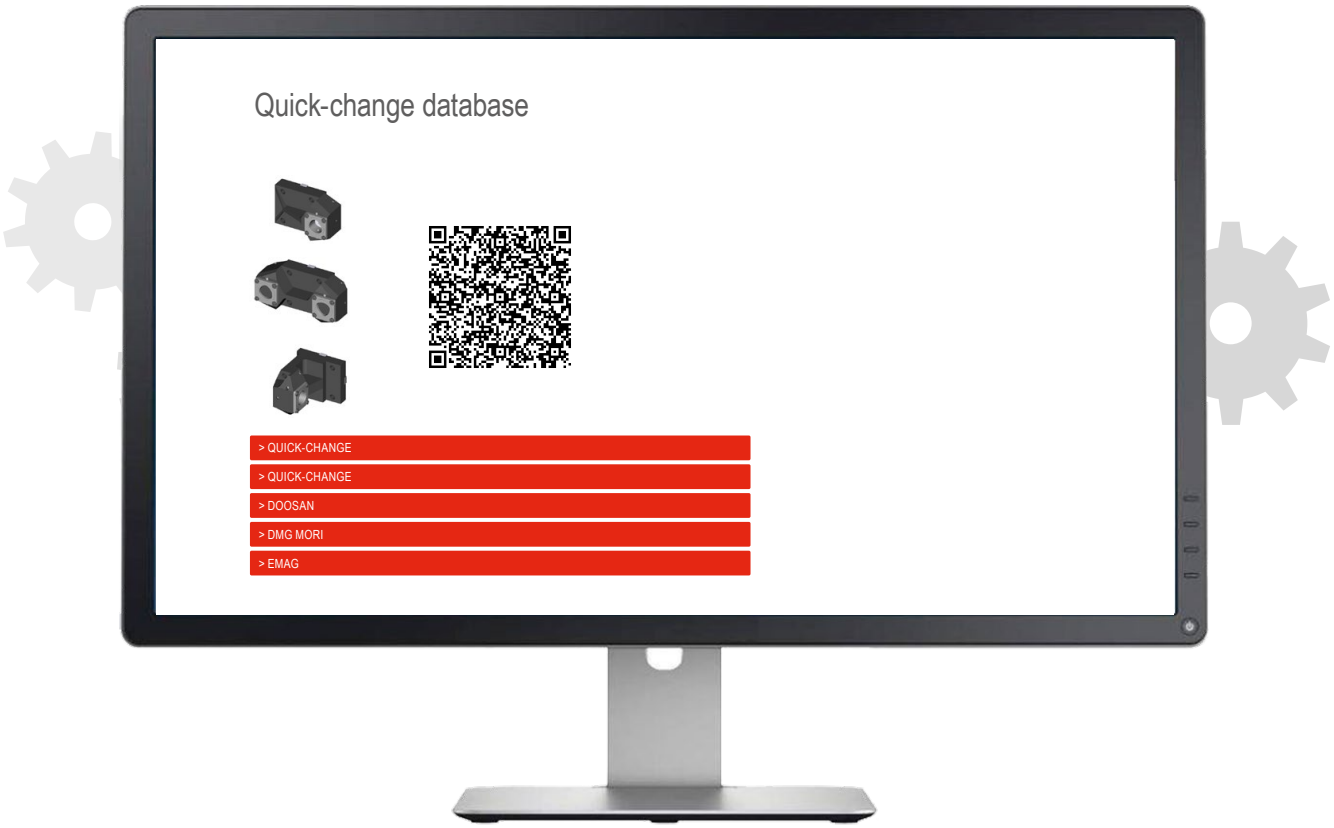

Information on enquiry process

To make the enquiry process as easy as possible, please use our enquiry form to enter the most important machine data and information on the machining process.
Please fill in this form carefully and send it to us by email or fax. → **cutting.tools/ie/download-quickchange**

If you have any questions regarding the ordering process or the form itself, your CERATIZIT Technical Sales Engineer will be happy to help.

Technical data for steep taper tools

ISO 7388-1 – Form A

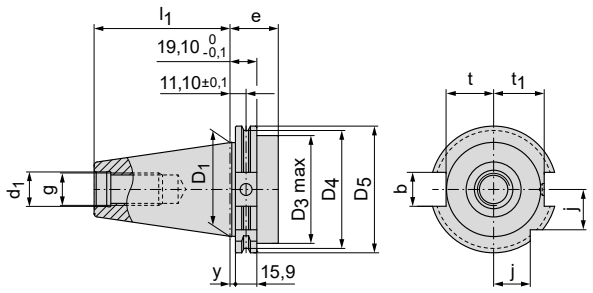

ISO 7388-1 – 871 Form B

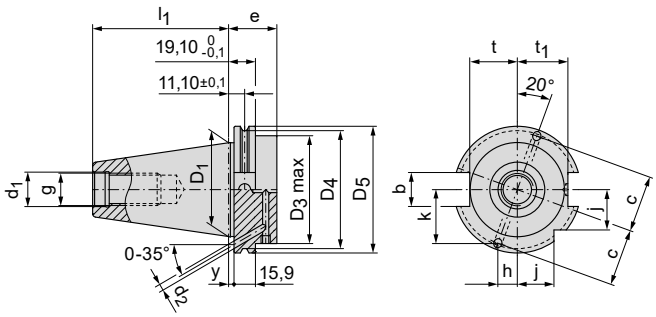

	D_1 mm	$D_{3\,max}$ mm	D_4 mm	D_5 mm	l_1 $^{+0,2}_{0}$ mm	g	d_1 ^{H7} mm	e mm	y $^{\pm0,1}$ mm	t mm	t_1 mm	j mm	d_2 mm	h mm	k mm	c mm	b mm
SK 30	31,75	45	44,30	50	47,8	M 12	13	35	3,2	16,4	19	15					16,1
SK 40	44,45	50	56,25	63,55	68,4	M 16	17	35	3,2	22,8	25	18,5	4	9,2	25,4	27	16,1
SK 50	69,85	80	91,25	97,5	101,75	M 24	25	35	3,2	35,5	37,7	30	6	14,4	39,5	42	25,7

ISO 7388-2

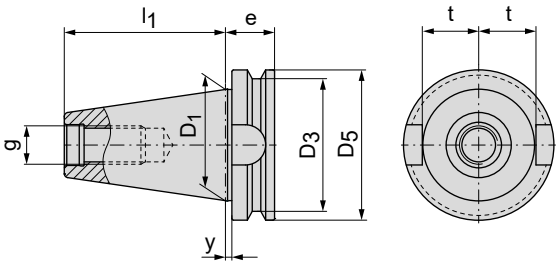

Maximum recommended rpm
for steep taper toolholders:
SK / BT 30 to 20,000 $^{1}/_{min.}$
SK / BT 40 to 20,000 $^{1}/_{min.}$
SK / BT 50 to 16,000 $^{1}/_{min.}$

	D_1 mm	D_3 mm	D_5 mm	l_1 mm	g	e mm	t mm	y mm	b mm
BT 30	31,75	38	46	48,4	M 12	22	16,3	2	16,1
BT 40	44,45	53	63	65,4	M 16	27	22,5	2	16,1
BT 50	69,85	85	100	101,8	M 24	38	35,3	3,2	25,7

Technical Data for Polygon shank adapters

ISO 26623-1

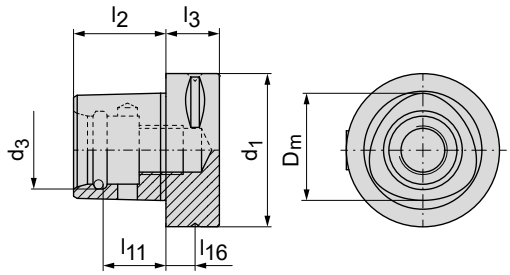

Shank size	d_1 mm	d_3 $^{\pm0,05}$ mm	l_2 $^{\pm0,1}$ mm	l_3 mm	l_{11} $^{\pm0,1}$ mm	l_{16} mm	D_m mm
32	32	16,5	19	15	13,5	9	22
40	40	20	24	20	17,5	12	28
50	50	24	30	20	22	12	35
63	63	32	38	22	26	12	44
80	80	38	48	30	34	12	55

Technical Data for HSK Adapters

ISO 12164 – HSK-A / HSK-C

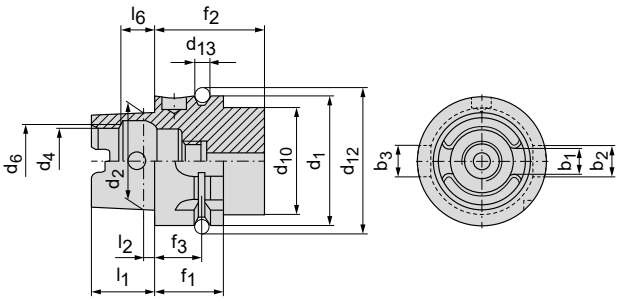

Maximum rpm recommended for HSK adapters:

HSK-A 32 to 50.000 $^{1}/_{min.}$
HSK-A 40 to 42.000 $^{1}/_{min.}$
HSK-A 50 to 30.000 $^{1}/_{min.}$
HSK-A 63 to 25.000 $^{1}/_{min.}$
HSK-A 100 to 16.000 $^{1}/_{min.}$

	b_1 mm	b_2 mm	b_3 mm	d_1 mm	d_2 mm	d_4 mm	d_6 mm	d_{10} mm	d_{12} mm	d_{13} mm	f_1 mm	f_2 mm	f_3 mm	l_1 mm	l_2 mm	l_6 mm
HSK 32	7,05	7	9	32	24	17	19	26	37	4	20	35	16	16	3,2	8,92
HSK 40	8,05	9	11	40	30	21	23	34	45	4	20	35	16	20	4	11,42
HSK 50	10,54	12	14	50	38	26	29	42	59,3	7	26	42	18	25	5	14,13
HSK 63	12,54	16	18	63	48	34	37	53	72,3	7	26	42	18	32	6,3	18,13
HSK 100	20,02	20	22	100	75	53	58	88	109,75	7	29	45	20	50	10	28,56

ISO 12164 – HSK-A

- Applied for machining centres, milling and special machines with automatic tool change
- **Central axial coolant supply via the coolant pipe**
- Torque transmission via 2 driving grooves at the taper end
- 2 grooves on the flange for the tool magazine, positioning notch, bore for data storage medium DIN 69873 in the flange

ISO 12164 – HSK-C

- Applied for machine spindles without automatic tool change as well as tool extensions and reducers
- **Central axial coolant supply via the coolant pipe**
- Torque transmission via 2 driving grooves at the taper end

ISO 12164 – HSK-E

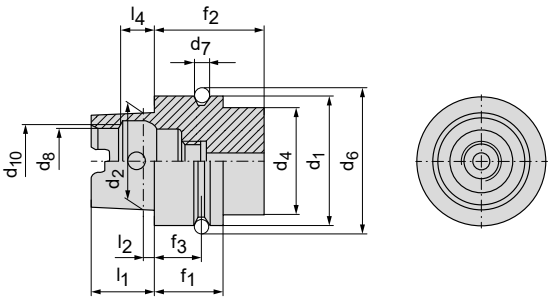

	d_1 mm	d_2 mm	d_4 mm	d_6 mm	d_7 mm	d_8 mm	d_{10} mm	f_1 mm	f_2 mm	f_3 mm	l_1 mm	l_2 mm	l_4 mm
HSK 40	40	30	34	45	4	21	23	20	35	16	20	4	11,42
HSK 50	50	38	42	59,3	7	26	29	26	42	18	25	5	14,13
HSK 63	63	48	53	72,3	7	34	37	26	42	18	32	6,3	18,13

ISO 12164 – HSK-E

- Applied for high rpm (HSC) for high speed spindles with automatic tool change
- Rotation symmetrical, without driving grooves
- Torque transmission through friction
- **Possibility of central coolant supply via coolant pipe**

Technical Information for Polygon Shank Adapters

ISO 26623-1

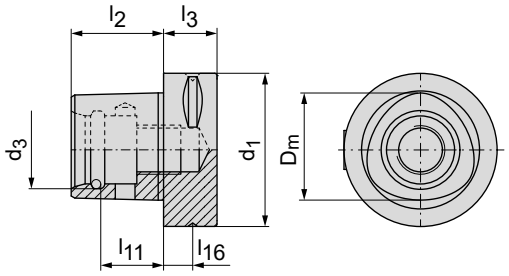

Shank size	d_1	d_3 ± 0,05	l_2 ± 0,1	l_3	l_{11} ± 0,1	l_{16}	D_m
32	32	16,5	19	15	13,5	9	22
40	40	20	24	20	17,5	12	28
50	50	24	30	20	22	12	35
63	63	32	38	22	26	12	44
80	80	38	48	30	34	12	55

Advantages of the PSC interface

The repeatability of the PSC shank is ± 2 microns

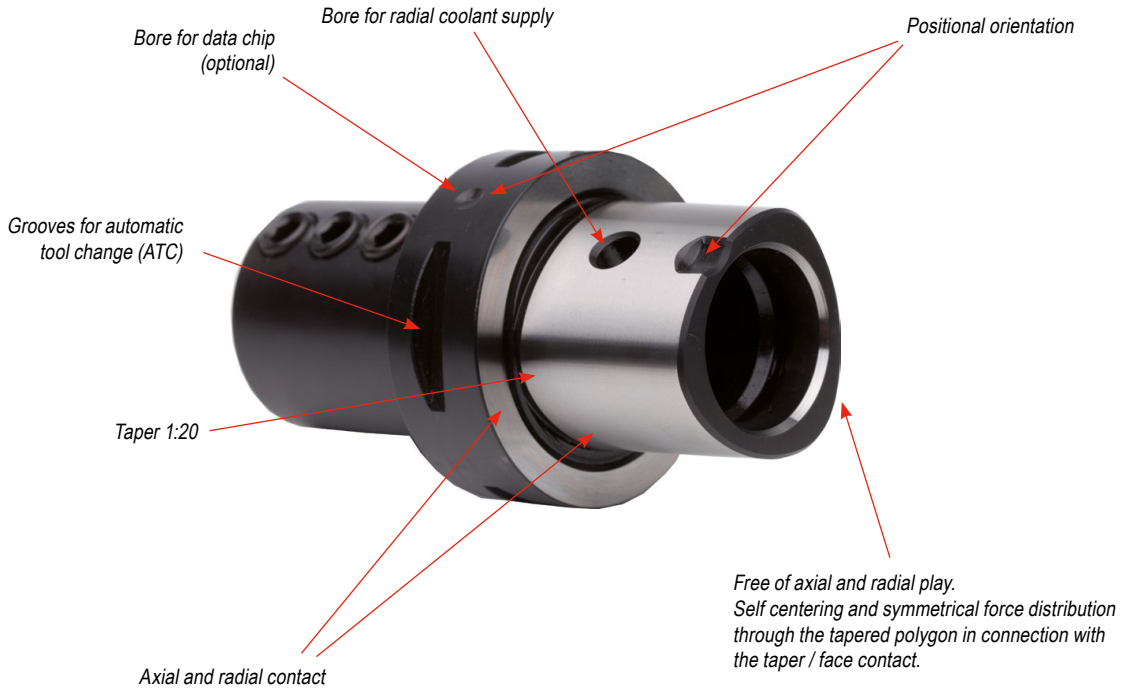

The tapered polygon in conjunction with the tight tolerance provides backlash-free centering also acts as pull back. The PSC cone has very high rigidity and bending strength. The main advantages of this interface are the transmittable torque stability, the resistance against radial forces acting on the tool and the exact center height. This means high feed rates can be achieved on large material cross sections. The PSC interface is ideally suited for all machining operations such as drilling, turning and milling.

HyPower / HyTens

The right hydraulic chuck for so many different machining scenarios!

Are you looking for higher cutting speeds to enhance productivity and facilitate handling? The entire range of **HyPower** high pressure chucks and the range of **HyTens** hydraulic chucks from CERATIZIT guarantee easy, process-secure tool clamping for every application.

HyPower –	High pressure chuck	Application range
Rough	Milling with strong forces > roughing	▽▽▽ ▽▽ ▽
Complus	All-rounder	▽▽▽ ▽▽ ▽
Access 3°	Optimum accessibility	▽▽▽
Access 4.5°	Optimum accessibility thanks to same interference contour as heat shrink adapter, latest technology	▽▽▽ ▽▽

HyTens –	Hydraulic chuck	Application range
Fit	All-rounder	▽▽▽ ▽▽
Turn	Perfect for turning operations	▽▽▽ ▽▽
Compact	affordable all-round alternative	▽▽▽ ▽▽

Main Application	▽▽▽	▽▽	▽
Extended application	▽▽	▽	
	Finishing	Roughing - Finishing	Roughing

Maximum performance and productivity

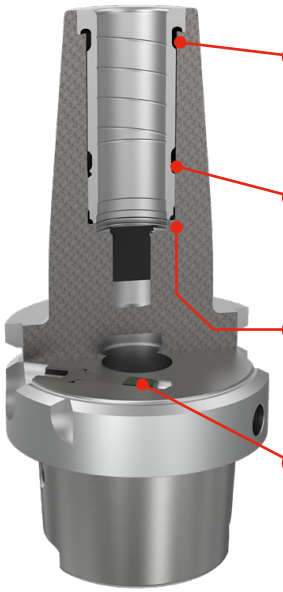

New chamber design makes it possible to reverse the force at critical solder joints (from tensile to compression load), enabling significantly higher radial loads during machining.

New chamber design significantly reduces the technology's susceptibility to temperature (up to 80°C even during milling operations lasting up to 240 minutes)

If there are multiple instances of unintended shrinking, the soldering system includes an emergency outlet to prevent potential injuries.

Double-lip sealing system dramatically increases the service life of the hydraulic chuck (over 10,000 clamping cycles under laboratory conditions)

HyPower / HyTens

Clamping of shanks with flats possible with or without reduction sleeve

HSS shank DIN1835 and
Solid Carbide shank DIN6535

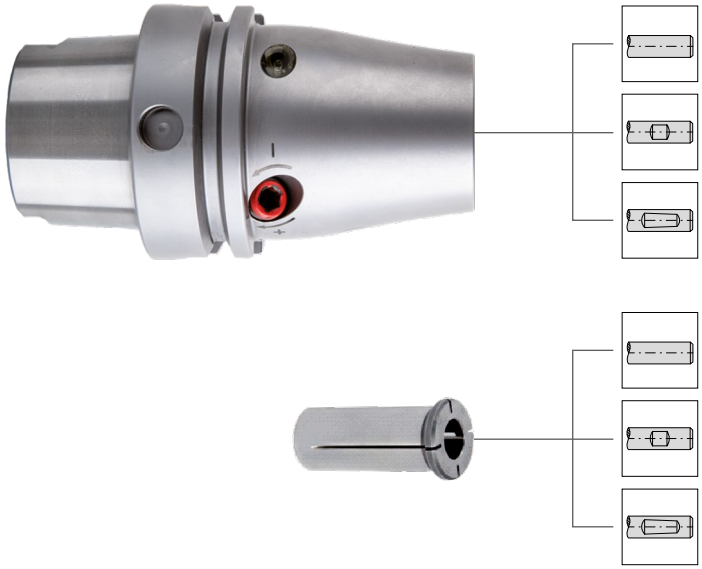

The main applications for Milling Chuck

- ▲ HPC Milling
- ▲ HSC Milling
- ▲ Hard Machining
- ▲ Drilling
- ▲ Reaming

Clamping Force Comparison with Different Systems

This comparison shows the higher retention forces of the Milling Chuck **(HyPower)**. Especially with larger diameters high holding force is important when HPC machining so that the tool is not pulled out of the holder. **HyPower** now offers this process reliability.

Key Benefits

- ▲ Increased Process Security
- ▲ Longer Tool Life
- ▲ Improved Surface Quality
- ▲ Extended spindle life

Shank type & size	16	18	20	25	32	mm
	Maximum transmissible torque with shank tolerance h6					
HyTens – Hydraulic chuck	170	240	330	400	650	Nm
HyPower – High pressure chuck	350	430	520	650–750	800–890	Nm
Heat Shrink Adapter	200	290	450	530	700	Nm

Symbol explanation

Plain cylindrical shank

Cylindrical shank with lateral driving face „Weldon“

Cylindrical shank with angled clamping flat „Whistle Notch“

Clamping Torque Values (Md) and minimum shank clamping depths for hydraulic- and high pressure chucks

Minimum shank clamping depths

	Shank type & size	6	8	10	12	14	16	18	20	25	32	mm
HyTens	Minimum clamping depth	27	27	31	36	36	39	39	41	47	51	mm
HyPower	Minimum clamping depth						39	39	41	47	51	mm

Clamping Torque Values (Md) for direct clamping

	Clamping diameter (d1 h6)	6	8	10	12	14	16	18	20	25	32	mm
HyTens	Md with shank at minimum size	20	30	47	80	100	160	200	330	400	650	Nm
HyTens	Md with shank at maximum size	30	45	85	140	160	230	270	400	470	730	Nm
HyPower	Md with shank at minimum size						280	360	550	650	800	Nm
HyPower	Md with shank at maximum size						380	450	650	750	890	Nm

Clamping Torque Values (Md) for clamping with reduction sleeve Ø 32 mm

	Clamping diameter (d1 h6)	6	8	10	12	14	16	18	20	25	mm
HyTens	Md with shank at minimum size	30	45	60	120	120	180	220	250	330	Nm
HyTens	Md with shank at maximum size	45	65	110	170	170	230	300	320	440	Nm

Clamping Torque Values (Md) for clamping with reduction sleeve Ø 20 mm

	Clamping diameter (d1 h6)	3	4	5	6	8	10	12	14	16	mm
HyTens	Md with shank at minimum size	6	9	16	30	55	90	120	135	190	Nm
HyTens	Md with shank at maximum size	10	12	22	40	75	120	150	170	260	Nm

Clamping Torque Values (Md) for clamping with reduction sleeve Ø 12 mm

	Clamping diameter (d1 h6)	3	4	5	6	8	mm
HyTens	Md with shank at minimum size	3	4	7	12	18	Nm
HyTens	Md with shank at maximum size	4	8	12	20	26	Nm

For Shrink Fit Adapter

Shank type & size	3	4	5	6	8	10	12	14	16	18	20	25	32	mm
Minimum clamping depth	12	16	20	26	26	31	37	37	40	40	42	48	52	mm
permissible torque moment	4	11	17	24	45	82	145	190	200	290	450	530	700	Nm

Static clamping moments

Static clamping moments of the Centro-P and HDC ER precision collet chucks with different tightening torques measured at the lock nut.

Centro-P

Clamping diameter (d1 h6)	2	3	3,5	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	mm
ER 16 torque moment 30 Nm	2	3,5	5																						Nm
ER 16 torque moment 50 Nm				12	20	30	45	60	72	80															Nm
ER 25 torque moment 40 Nm				10	20	40																			Nm
ER 25 torque moment 75 Nm							62	75	85	95															Nm
ER 25 torque moment 90 Nm											122	145	160	175	190	200									Nm
ER 32 torque moment 60 Nm				20	30	40																			Nm
ER 32 torque moment 120 Nm							75	90	110	120	135	150	160	180	190										Nm
ER 32 torque moment 140 Nm																220	240	260	280	300					Nm
ER 40 torque moment 70 Nm				60	75	90	100																		Nm
ER 40 torque moment 110 Nm								110	125	140	150														Nm
ER 40 torque moment 150 Nm												200	220	240	260	300	350								Nm
ER 40 torque moment 200 Nm																			420	440	460	480	515	530	Nm

HDC – Heavy Duty Chuck

Clamping diameter (d1 h6)	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	mm
ER 32 tightening torque 40 Nm			25	37	50															Nm
ER 32 torque moment 120 Nm						93	112	137	150	168	187	200	225	237						Nm
ER 32 torque moment 140 Nm															275	300	325	350		Nm
ER 32 tightening torque 180 Nm																			375	Nm

Measurement of the specified clamping forces was performed exclusively statically. The actual clamping forces that arise during machining may deviate due to various influences (vibrations, oscillations, machining situation).

Technical information – ABS

Even better connected

The extension of the proven ABS system complements the existing portfolio and continues to meet the high demands on accuracy. The adapter is an important element in tooling systems between the cutting tool and the machine. It must be able to reliably transmit the cutting forces that are produced. Adapters also have a considerable impact on the quality of the machining result. They also contribute to the cost-effectiveness of the machining process.

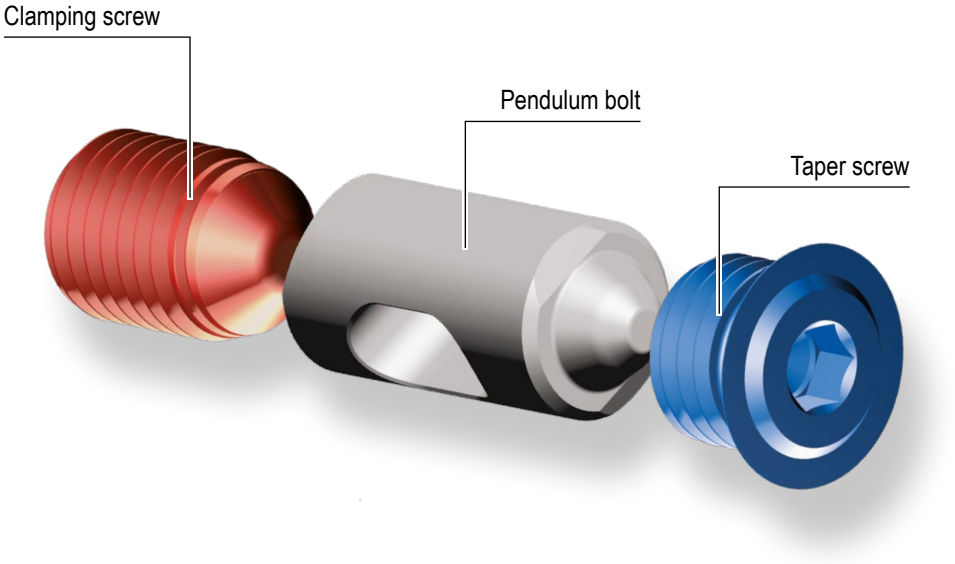

Advantages

- ▲ Improved force transmission
- ▲ Optimum machining result
- ▲ Higher cutting values possible
- ▲ Less noise pollution in production
- ▲ System fully compatible upwards and downwards
- ▲ Suitable for ABS, ABS N and ABS T

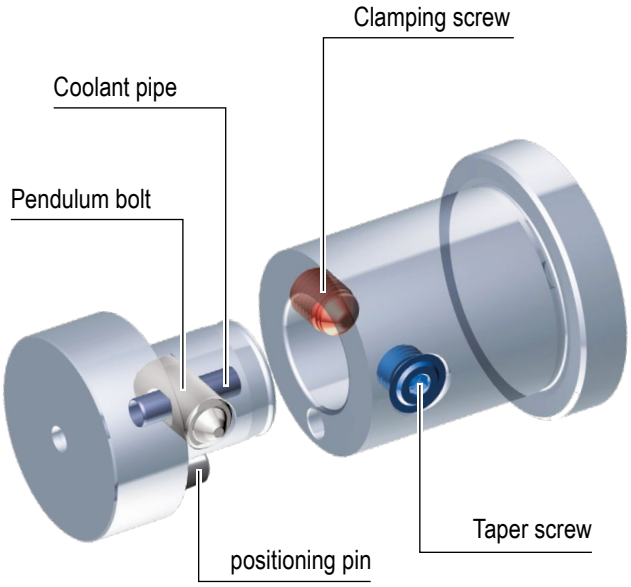

Spare parts ABS	Taper screw	Pendulum bolt	Clamping screw	Range 1	Coolant pipe	positioning pin	Range 2	Sealing ring
25	84 950 27000	84 950 26000	84 950 26800	84 950 99700	84 950 24400	84 950 23600	84 950 98900	84 950 30400
32	84 950 27100	84 950 26100	62 950 13989	84 950 99600	84 950 24500	84 950 23700	84 950 98800	84 950 30500
40	84 950 27200	84 950 26200	84 950 26900	84 950 99500	84 950 24600	84 950 23800	84 950 98700	84 950 30600
50	84 950 20400	84 950 20000	84 950 20300	84 950 99800	84 950 20100	84 950 20200	84 950 99900	84 950 30700
63	84 950 27300	84 950 26300	84 950 25500	84 950 99400	84 950 24700	84 950 23900	84 950 98600	84 950 30800
80	84 950 25100	84 950 26400	84 950 25600	84 950 99300	84 950 24800	84 950 24000	84 950 98500	84 950 30900
100	84 950 25200	84 950 26500	84 950 25700	84 950 99200	84 950 24900	84 950 24100	84 950 98400	84 950 31000
125	84 950 25300	84 950 26600	84 950 25800	84 950 99100	84 950 25000	84 950 24200	84 950 98300	
160	84 950 25400	84 950 26700	84 950 25900		84 950 23500	84 950 24300		

DAH compensation holders

- ▲ Compensation systems for µ-precision run-out
- ▲ Simple correction of run-out and axis errors
- ▲ Optimised for high rpm
- ▲ Designed for internal coolant supply
- ▲ Rotary tools provide long tool life

84 327 ...

DAH adapter for tools
with ABS adapter

DAH hydraulic expansion adapter
for tools with cylindrical shank

84 329 ...

With HSK interface
ISO 12164

With ABS interface

84 329 ...

SK steep taper per
ISO 7388-1

BT steep taper per
ISO 7388-2

DAH 50 HS compensation holder for high-speed machining

- ▲ Tried and tested hydraulic expansion clamping technology
- ▲ Maximum run-out and repeatability precision < 1 µ ensures consistent cutting action
- ▲ Very simple run-out adjustment
- ▲ Compact design
- ▲ Unbeatable vibration damping, meaning outstanding surface quality
- ▲ Flexible clamping range with reduction sleeves
- ▲ Speeds of up to 25,000 rpm
- ▲ Suitable for minimum quantity lubrication (MMS)

84 326 ...

With HSK interface
ISO 12164

SK steep taper per
ISO 7388-1

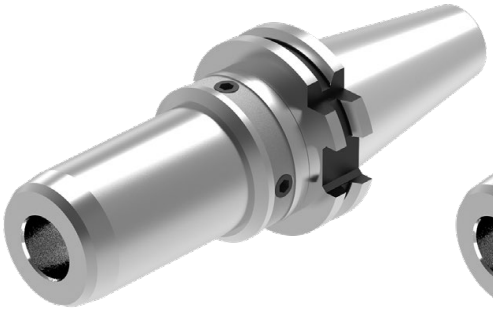

BT steep taper per
ISO 7388-2

A detailed operating manual is available for download in the online shop next to the product.

ZSG mini
CERATIZIT GROUP
MNG mini

New products for clamping technology

NEW Mechanical Zero-point Clamping System – MNG mini

149–151

MNG mini Weight-optimized consoles, pyramids and clamping towers integrated zero point clamping system for small clamping devices.

NEW CentriClamp – ZSG mini

92–100

ZSG mini The ZSG mini is ideal for clamping small workpieces.

NEW PolyClamp – Verso

111–124

Verso The new flexible multiple vice with quick jaw change system for many small and large workpieces.

Solid drilling and bore machining
1 HSS drilling
2 Solid carbide drilling
3 Indexable insert drilling
4 Reaming and Countersinking
5 Spindle Tooling

Threading
6 Taps and thread formers
7 Circular and Thread Milling
8 Thread turning

Turning
9 Turning Tools
10 Multifunctional Tools – EcoCut and FreeTurn
11 Grooving Tools
12 Miniature turning tools

Milling
13 HSS Milling Cutters
14 Solid Carbide milling cutters
15 Milling tools with indexable inserts

Clamping technology
16 Adaptors and Accessories
17 Workpiece clamping
18 Material examples and article no. Index

Table of contents

PolyClamp – Verso	4
Clamping systems overview	5
Toolfinder – Clamping systems	6–9
Product programme	10–183
General top jaws overview	164–173
Workpiece supports overview	174–177
Accessories General Overview	178+179
Clamping levers overview	180+181
Screws Overview	182+183

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

PolyClamp – Verso

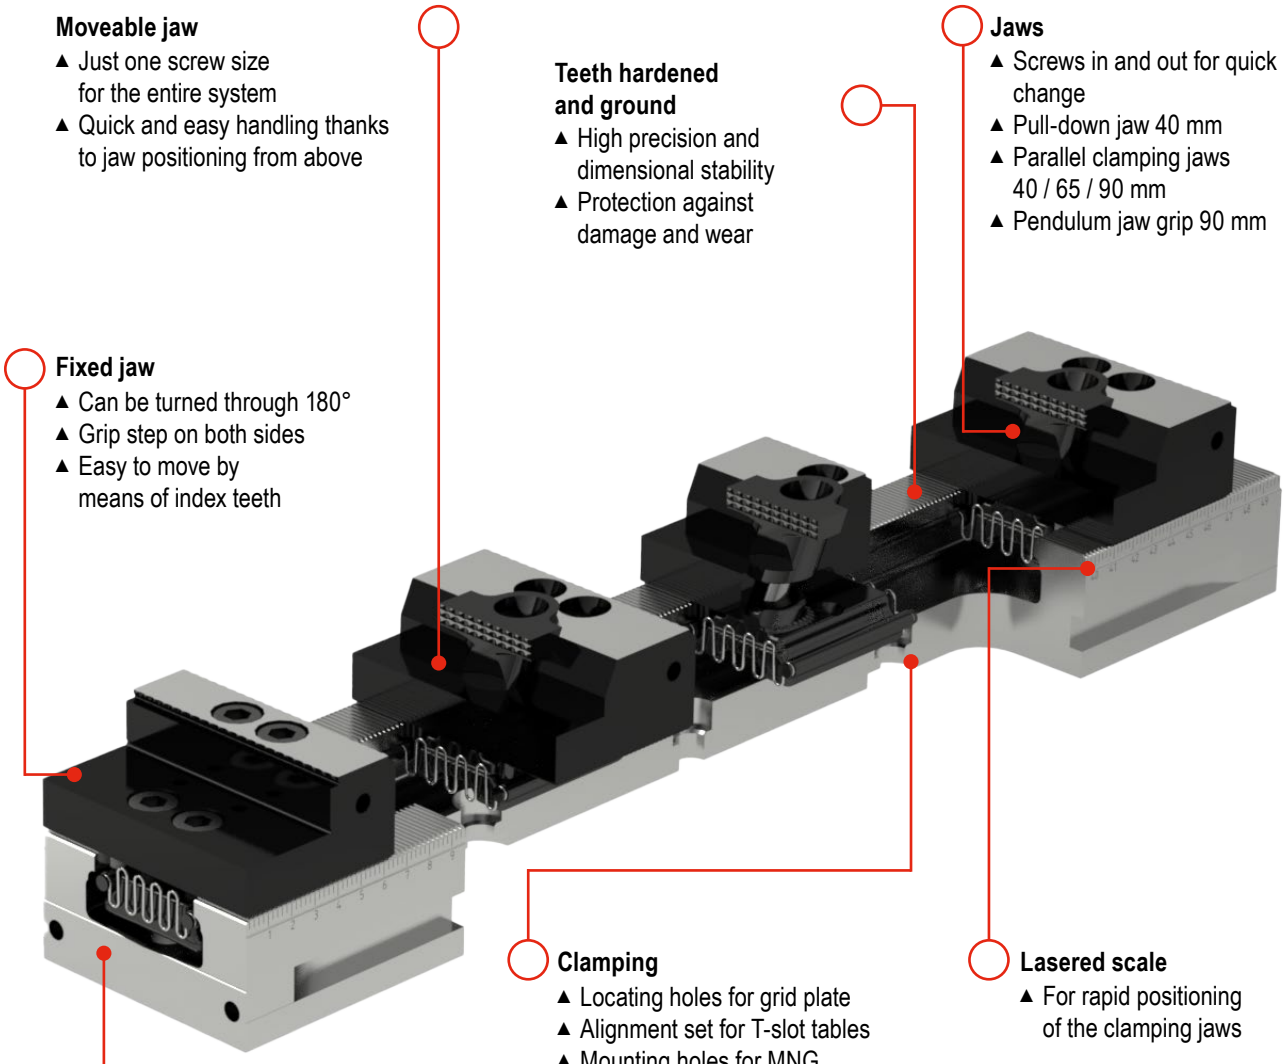

Clamping systems overview

SoloClamp – Single clamping vice

- Power-assisted systems NCG, HDG 2 and H5G
- Fixed jaws as reference
- High repeatability
- Very good angular accuracy

High precision and force amplification

CentriClamp – Centric vice

- symmetrical clamping
- very good accessibility for 5-sided machining
- part datum always centered
- high repeatability

High process security with encapsulated system

PolyClamp – Multiple vice

- Faster set up times
- multifunctional use
- optimum utilization of the machine table
- high repeatability

Increased machine uptime

Stationary three-jaw chuck – SBF 3

- Suitable for 3/5-axis machining of round components
- Compatible with PNG and MNG zero point clamping systems
- Wedge bar drive
- Hardened and stiff base body
- Optimised lubrication system

Ø 200 mm

Ø 315 mm

The perfect clamping situation for round components

Clamping variants

- Zero point clamping systems
- Zero point clamping system grid plates
- MNG – Mechanical zero point clamping system
- PNG – Pneumatic zero point clamping system

Reduction in setup times

Clamping Towers

- Double sided clamping tower
- Triangular clamping tower
- Cruciform clamping tower
- Cube clamping tower

A variety of clamping towers can be found in our online shop at cuttingtools.ceratizit.com

Automation made easy

Toolfinder clamping systems

	Type		Description	3 axis	4 axis	5 axis
SoloClamp – Single clamping vice	NCG		▲ 160° quick clamping ▲ rapid installation and removal of the spindle assembly ▲ quick span adjustment	✓	✓	
	NCG 5A		▲ 160° quick clamping ▲ for 5 axis machining ▲ quick span adjustment	✓		✓
	H5G		▲ fast handle clamping ▲ 5 axis high power vice ▲ 100% encapsulated	✓		✓
	H5G -Z		▲ Fast handle clamping ▲ 5-axis high power vice ▲ 100% encapsulated ▲ With movable fixed jaw	✓		✓
	X5G -Z		▲ 100 % encapsulated ▲ Optimum accessibility ▲ 5- and 6-sided machining possible ▲ Fast jaw changeover without tools	✓		✓
	ESG 4		▲ 100 % encapsulated ▲ Precision base body ▲ High clamping force ▲ Large clamping range	✓	✓	✓
	ESG 5		▲ New version of the sealed centric vice ZSG 4 as single vice ▲ Identical dimensions and function as the ZSG 4	✓	✓	✓
	HDG 2		▲ mechanical power transmission ▲ clamping force with only one turn of the handle ▲ infinitely variable clamping force setting	✓		
CentriClamp – Centric vice	ZSG 4		▲ ball bearing, backlash free spindle ▲ high precision, clamping force and process security ▲ repeatability ±0.01 mm	✓	✓	✓
	ZSG mini		▲ Fast jaw changeover without tools ▲ compact and precise ▲ optimum accessibility from all sides ▲ stainless, hardened base body	✓	✓	✓

Jaw width in mm	Body length in mm	max. clamping range in mm	cubic workpieces	assymetrical workpieces	round workpieces	max. clamping force in kN	Page No.
100 125 160	305 390 530	245 343 506	✓	✓	✓	30 40 40	10–21
100 125	305 390	199 269	✓		✓	18 24	13–21
125	300	249	✓	✓	✓	40	22–36
125	330 430 500 630	396 466 578	✓	✓	✓	40	26–36
125	330 430 500 630 800	80-210 80-310 80-380 80-510 80-688	✓	✓	✓	40	37
80 125 160	214 362 480	192 308 434	✓	✓	✓	25 40 50	49–58
80 125 160	130+190 160+235+300 280+480	63-171 84-281 125-448	✓	✓	✓	35 35 50	59–66
100 125 160	342 400 544	278 338 470	✓		✓	30 40 60	68–71
80 125 160	130+190 160+235+300 280+480	121–185 163–303 134–462	✓	✓	✓	25 40 50	72–90
45 70	80 100	7–77	✓	✓	✓	16	92–100

17

Toolfinder clamping systems

	Type		Description	3 axis	4 axis	5 axis
PolyClamp – Multiple vice	DSG 4		▲ Quick assembly and disassembly ▲ Flexible clamping system ▲ Can be converted into single vice	✓	✓	✓
	Verso		▲ Variable clamping system ▲ Clamp several small and large components ▲ Innovative multiple vice system	✓	✓	✓
Stationary three-jaw chuck	SBF 3		▲ Suitable for 3/5-axis machining of round components ▲ Compatible with PNG and MNG zero point clamping systems	✓		✓
			▲ Suitable for 3/5-axis machining of round components ▲ Compatible with PNG and MNG zero point clamping systems	✓		✓

		Type		Description
Zero point clamping systems	mechanical	MNG		▲ All round plate for all machine tables
		MNG mini		▲ For workpiece clamping in the smaller dimension range
	pneumatic	PNG		▲ Process security thanks to self-locking mechanism
Clamping Towers			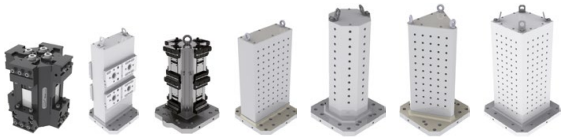	▲ Increased machine uptime

Manual machine vice

Drilling machine vice	HSG		▲ fast jaw adjustment, compact and precise

Jaw width in mm	Body length in mm	max. clamping range in mm	cubic workpieces	assymetrical workpieces	round workpieces	max. clamping force in kN	Page No.
80 125	300 320+390+460 530+600+670+740	102 114+149+184 219+254+289+324	✓	✓	✓	25 40	101–110
40 65 90	260 -650	524	✓	✓	✓	30	111–124
	Ø 200	SB-H jaws 6–180			✓	100	125–130
	Ø 315	SB-H jaws 12–420			✓	180	

mechanical	pneumatic	Comments	Page No.
✓			134–148
✓			149–151
	✓		152–163
✓		This article can be found in our online shop at cuttingtools.ceratizit.com	
✓			131–133

17

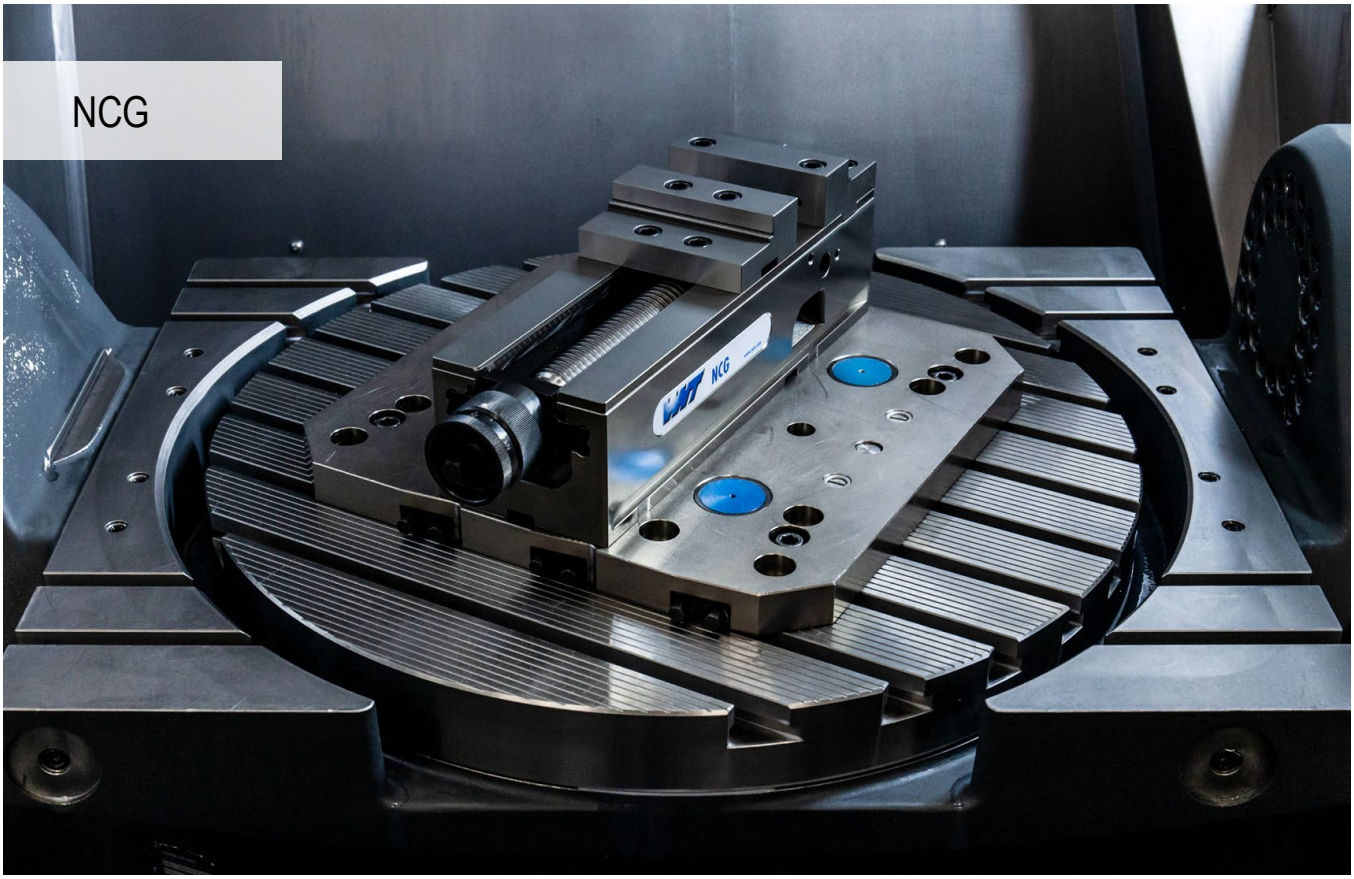

Systematic clamping

Modular machine vice as system with clamping under tension.
Unique, patented fast handle clamping with mechanical power assist and minimum setup times.

Your benefits:

- ▲ Quick adjustment using a crank handle
- ▲ Quick positioning with MNG on the machine table without an intermediate pallet
- ▲ Clamping force can be continuously adjusted 4 – 40 kN
- ▲ 160° quick clamping
- ▲ Quick and easy jaw change with 4 screws
- ▲ Easy cleaning thanks to rapid disassembly of the entire spindle unit
- ▲ Extensive modular jaw range

Clamping/aligning:

Clamping with two dowel screws dia. 12_{f7} / M12 (NCG 100) **Article no. 80 890 313** or dia. 16_{g5} / M16 (NCG 125 / 160) **Article no. 80 890 314**



Alignment through 20^{H7} precision slot nuts in the base body and clamping with clamping claws

Alignment and clamping with MNG zero point clamping system (2-3 mounting bolts)

SoloClamp – NCG

▲ NC-quick clamping vice with combi reversible jaw plus
▲ thanks to additional threads, top jaws with heights of 18 mm and 40 mm can be used

Scope of supply:

NC-quick vice, including 4 clamping claws, 2 combi reversible jaw plus, clamping lever

NCG **MNG**

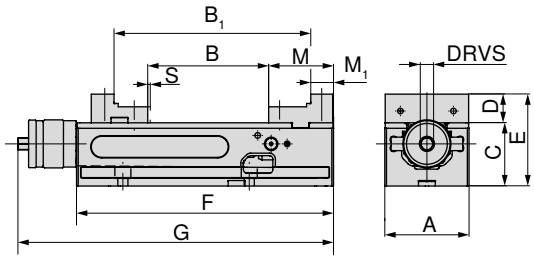

A mm	B mm	B_1 mm	C -0.02 mm	D mm	E mm	F mm	G mm	M mm	M_1 mm	S mm	DRVS mm	MXC kN	WT kg	80 890 ... EUR Y4	
125	0 - 212	96 - 307	100	39	139	390	457	89	39	3	14	4 - 40	34	3.110,00	**12500**

SoloClamp – NCG

▲ NC-quick clamping vice with combination jaw
▲ Fast 160° handle clamping
▲ Rapid installation and removal of the spindle assembly
▲ S = powerstroke

Scope of supply:

NC-quick vice, including 4 clamping claws, 2 combi reversible jaws (one side stepped, one side smooth), clamping lever

NCG **MNG**

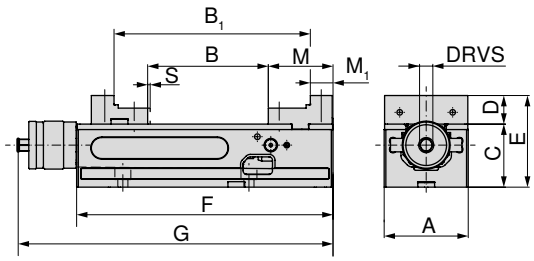

A mm	B mm	B_1 mm	C -0.02 mm	D mm	E mm	F mm	G mm	M mm	M_1 mm	S mm	DRVS mm	MXC kN	WT kg	80 890 ... EUR Y4	
100	0 - 155	91 - 245	75	34	109	305	374	77	27	2,5	14	4 - 30	19	2.660,00	**602**
125	0 - 212	96 - 307	100	39	139	390	457	89	39	3	14	4 - 40	34	3.080,00	**627**
160	0 - 314	113 - 426	115	49	164	530	600	108	52	3	14	4 - 40	68	4.040,00	**662**

Vice guide

Underside Dimensions	14	System accessories	16–21
MNG-/PNG zero point clamping system	134–163	General accessories	164–183

SoloClamp – NCG

▲ NC-quick clamping vice with standard jaw
▲ Fast 160° handle clamping
▲ Rapid installation and removal of the spindle assembly
▲ S = powerstroke

Scope of supply:
NC-quick vice, including 4 clamping claws, 2 standard reversible jaws (one side smooth, one side serrated), clamping lever

NCG **MNG**

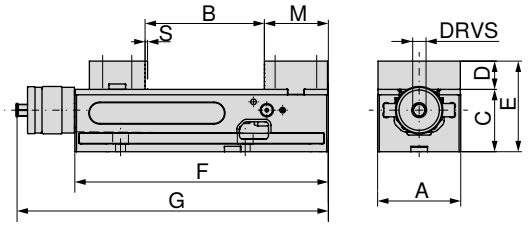

80 890 ...

A mm	B mm	C -0.02 mm	D mm	E mm	F mm	G mm	M mm	S mm	DRVS mm	MXC kN	WT kg	EUR Y4	
100	0 - 155	75	34	109	305	374	77	2,5	14	4 - 30	19,5	2.580,00	**600**
125	0 - 212	100	39	139	390	457	89	3	14	4 - 40	35,0	3.010,00	**625**
160	0 - 314	115	49	164	530	600	108	3	14	4 - 40	70,0	3.960,00	**660**

SoloClamp – NCG

▲ NC-quick clamping vice with adapter and pendulum jaws
▲ fast 160° lever clamping
▲ rapid installation and removal of the spindle assembly
▲ S = powerstroke
▲ simple raw part clamping
▲ free positioning of the 6-face reversible jaw which can be found in the accessories

Scope of supply:
NC-quick vice (type NCG base body) with 1 fixed adapter plate and 1 pendulum jaw, clamping lever, 4 clamping claws, without 6-face indexable jaws

NCG **MNG**

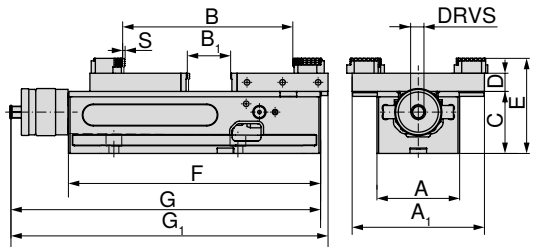

80 890 ...

A mm	A_1 mm	B mm	B_1 mm	C -0.02 mm	D mm	E mm	F mm	G mm	G_1 mm	S mm	DRVS mm	MXC kN	WT kg	EUR Y4	
100	160	10 - 230	0 - 77	75	22	115	305	374	383	2,5	14	4 - 30	19	2.770,00	**636**
125	192	16 - 343	0 - 152	100	22	140	390	457	478	3	14	4 - 40	34	3.220,00	**637**
160	256	15 - 506	0 - 237	115	22	155	530	600	631	3	14	4 - 40	68	4.250,00	**638**

Vice guide

Underside Dimensions	14	System accessories	16–21
MNG-/PNG zero point clamping system	134–163	General accessories	164–183

SoloClamp – NCG 5A

- ▲ NC quick vice 5A with high support jaws
- ▲ Fast 160° handle clamping
- ▲ Rapid installation and removal of the spindle assembly
- ▲ S = powerstroke
- ▲ Ideally suited to 5-axis machining due to optimum accessibility
- ▲ Reversible jaws for clamping range extension
- ▲ 100 mm base body has 2 slots for moving the fixed jaw
- ▲ 125 mm base body has 3 slots for moving the fixed jaw

Scope of supply:
NC quick clamping vice incl. 2 high base jaws, 2 'grip' stepped jaws 5 mm, 1 clamping lever, 4 clamping claws

NCG 5A | **MNG**

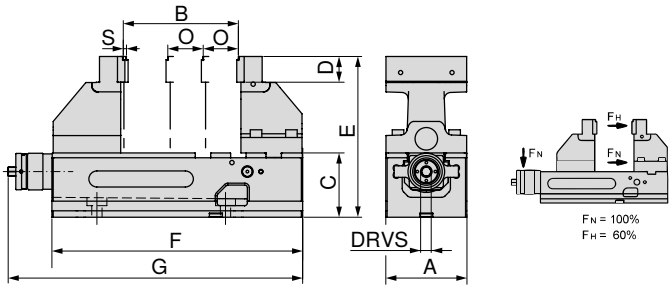

80 890 ...

A	B	C	D	E	F	G	O	S	DRVS	MXC	WT	EUR	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg	Y4	
100	6 - 127	75	35	200	305	374	50	2,5	14	4 - 18 (30)	21,5	3.210,00	**605**
125	6 - 179	100	40	250	390	457	55	3	14	4 - 24 (40)	42,0	3.710,00	**635**

Vice guide

Underside Dimensions	14	Structural dimension tables for the different jaws	15
System accessories	16–21	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

NCG underside dimensions

Base width 100 mm

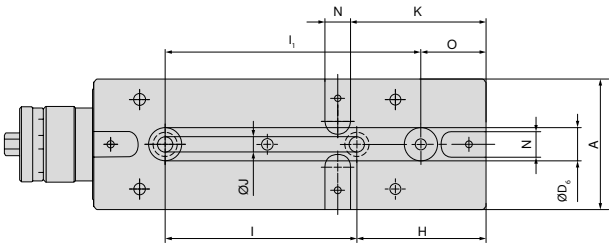

A mm	H mm	$l_{\pm 0,015}$ mm	J_{F7} mm	K mm	N_{H7} mm	O mm	$l_{1\ \pm 0,015}$ mm	$D_{6\ H7}$ mm
100	100	150	12	105	20	50	200	25

Base width 125 mm

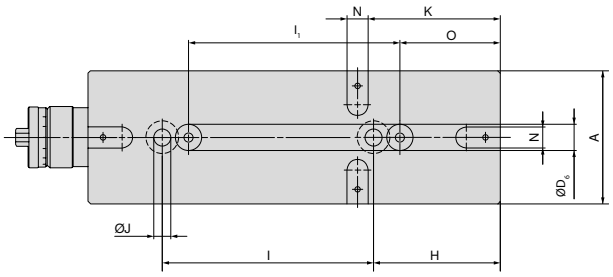

A mm	H mm	$l_{\pm 0,015}$ mm	J_{F7} mm	K mm	N_{H7} mm	O mm	$l_{1\ \pm 0,015}$ mm	$D_{6\ H7}$ mm
125	120	200	16	125	20	95	200	25

Base width 160 mm

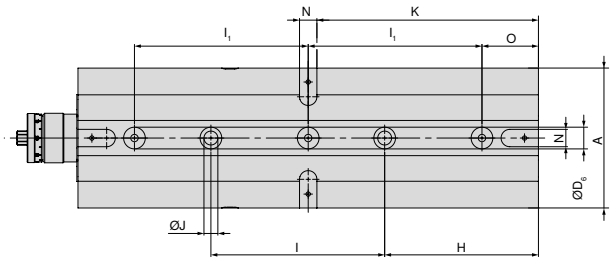

A mm	H mm	$l_{\pm 0,015}$ mm	J_{F7} mm	K mm	N_{H7} mm	O mm	$l_{1\ \pm 0,015}$ mm	$D_{6\ H7}$ mm
160	177	200	16	255	20	65	200	25

NCG 5A structural dimension table for different jaw positions

NCG 5A 100 mm

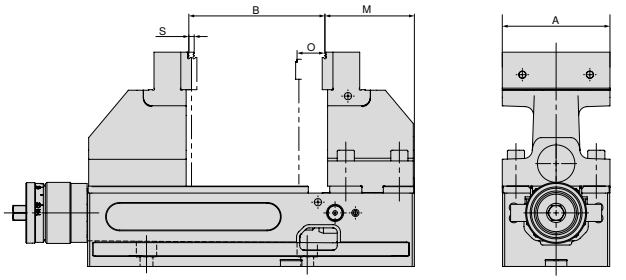

A mm	B mm	M mm	O mm	S mm
100	6 - 127	84,5	50	2,5

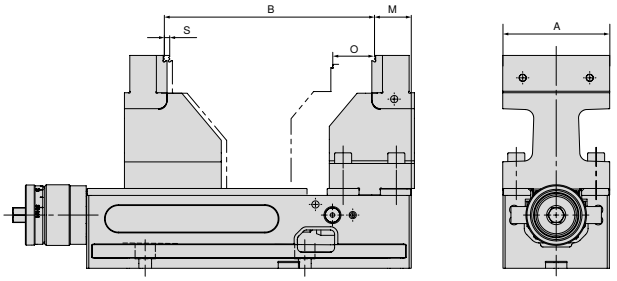

A mm	B mm	M mm	O mm	S mm
100	97 - 199	34,5	50	2,5

NCG 5A 125 mm

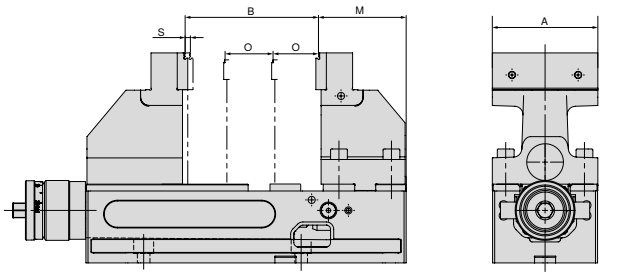

A mm	B mm	M mm	O mm	S mm
125	6 - 182	91	55	3

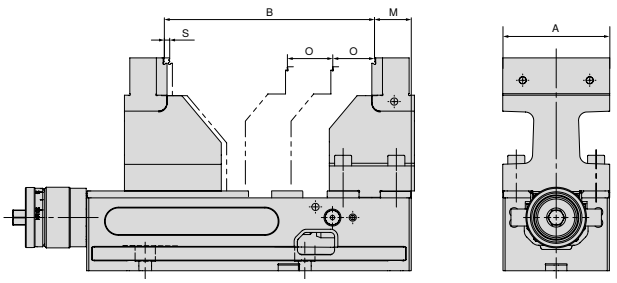

A mm	B mm	M mm	O mm	S mm
125	117 - 269	36	55	3

System jaws overview

Combi reversible jaw plus, fixed

- For the extension of the clamping range
- Jaws hardened
- includes fixing bolts
- price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		39,8	22			88			377,00	**80 890 35100**	●										

Combi reversible jaw plus, movable

- For the extension of the clamping range
- Jaws hardened
- includes fixing bolts
- price per piece





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		39,8	22			82			377,00	**80 890 35200**	●										

Standard reversible jaw, fixed

- 1 side smooth, 1 side grooved
- includes fixing bolts
- price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100		34				76			247,00	**80 890 323**	●										
125	125		39				88			323,00	**80 890 324**	●										
160	160		49				108			407,00	**80 890 325**	●										

Standard reversible jaw, movable

- 1 side smooth, 1 side grooved
- includes fixing bolts
- price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100		34				67			247,00	**80 890 327**	●										
125	125		39				82			323,00	**80 890 328**	●										
160	160		49				108			407,00	**80 890 329**	●										

System jaws overview

Combi reversible jaw, fixed

- For the extension of the clamping range
- Jaws hardened
- includes fixing bolts
- price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100		34	23			76	50		285,00	**80 890 343**	●										
125	125		39	25			88	50		363,00	**80 890 344**	●										
160	160		49	28			108	56		446,00	**80 890 342**	●										

Combi reversible jaw, movable

- For the extension of the clamping range
- Jaws hardened
- includes fixing bolts
- price per piece





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100		34	23			67	40		285,00	**80 890 347**	●										
125	125		39	25			82	45		363,00	**80 890 348**	●										
160	160		49	28			108	56		446,00	**80 890 346**	●										

Soft jaw, steel, fixed

- Material: 16MnCr5
- For producing shaped jaws (hardenable)
- Without fixing screws
- Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100		50				95			143,40	**80 890 763**	●										
125	125		50				110			149,70	**80 890 764**	●										

Soft jaw, steel, movable

- Material: 16MnCr5
- For producing shaped jaws (hardenable)
- Without fixing screws
- Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100		50				85			143,90	**80 890 767**	●										
125	125		50				100			151,10	**80 890 768**	●										

17

System jaws overview

5A carrier jaw, fixed

▲ Price per piece
▲ With stepped grip jaw, 5 mm



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100	100				125				554,00	**80 890 364**	●										
125	125	125				150				666,00	**80 890 366**	●										

5A carrier jaw, movable

▲ Price per piece
▲ With stepped grip jaw, 5 mm



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100	100				125				589,00	**80 890 365**	●										
125	125	125				150				730,00	**80 890 367**	●										

Fixed adaptor jaw

▲ for holding 6-way reversible jaws
▲ price per piece
▲ incl. 6 cover screws



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100	160	22				110			278,00	**80 890 321**	●										
125	125	192	22				130			397,00	**80 890 337**	●										
160	160	256	22				170			521,00	**80 890 339**	●										

Pendulum jaw, movable

▲ for holding 6-way reversible jaws
▲ price per piece
▲ incl. 6 cover screws (with A = 100 mm, 4 pieces)



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	100	160	22				110			401,00	**80 890 322**	●										
125	125	192	22				130			472,00	**80 890 338**	●										
160	160	256	22				170			582,00	**80 890 340**	●										

System jaws overview

6 function indexable jaw

- ▲ 1 = Smooth, carbide coated
- ▲ 2 = Grip with 3 mm step
- ▲ 3 = Grip with 8 mm step
- ▲ 4 = Grip with 18 mm step
- ▲ 5 = Rough grip with 8 mm step
- ▲ 6 = Round grip
- ▲ M_{max} = 60 Nm
- ▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

6x indexable jaw, carbide grip

- ▲ 1 = Smooth
- ▲ 2 = Carbide grip
- ▲ 3 = Carbide grip with 3 mm step
- ▲ 4 = Carbide grip with 8 mm step
- ▲ 5 = Round carbide grip with 8 mm step
- ▲ 6 = Round carbide grip
- ▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

System accessories overview

Spindle body

▲ For the conversion of the NCG 5AC into an NCG vice

NCG | NCG 5A

for width mm		80 890 ... EUR Y4	
100		186,00	385
125		197,00	387
160		224,00	389

Carrying handle

▲ for simple and safe transporting

Scope of supply:
1 piece Hand grip including fixing bolts

NCG | NCG 5AC

for width mm	80 890 ... EUR Y4	
100/125	18,20	685

Drawbar extension

▲ For connecting 2 NCG vices

NCG | NCG 5A

for width mm	B mm	80 890 ... EUR Y4	
100	305 - 460	318,00	460
125	390 - 602	349,00	470

Protection plate

▲ For standard moving and combi reversible jaw

NCG





for width mm	80 890 ... EUR Y4	
100	4,60	010
125	3,50	012
160	35,00	013

Cover plate set

NCG | NCG 5AC



for width mm	80 890 ... EUR Y4	
100	27,10	442
125	31,00	443
160	32,40	444

Spring Loaded Locator

NCG

for width mm	80 890 ... EUR Y4	
100/125	2,30	008
160	2,30	014

System accessories overview

Clamping lever

▲ including control accessories

NCG | NCG 5A | H5G

for width mm	DRVS mm	80 890 ... EUR Y4	
100/125/160	14	128,00	501

High-speed operation device

▲ For faster span adjustment with removable grip

NCG | NCG 5AC

for width mm	80 890 ... EUR Y4	
100	63,20	550
125/160	75,10	551

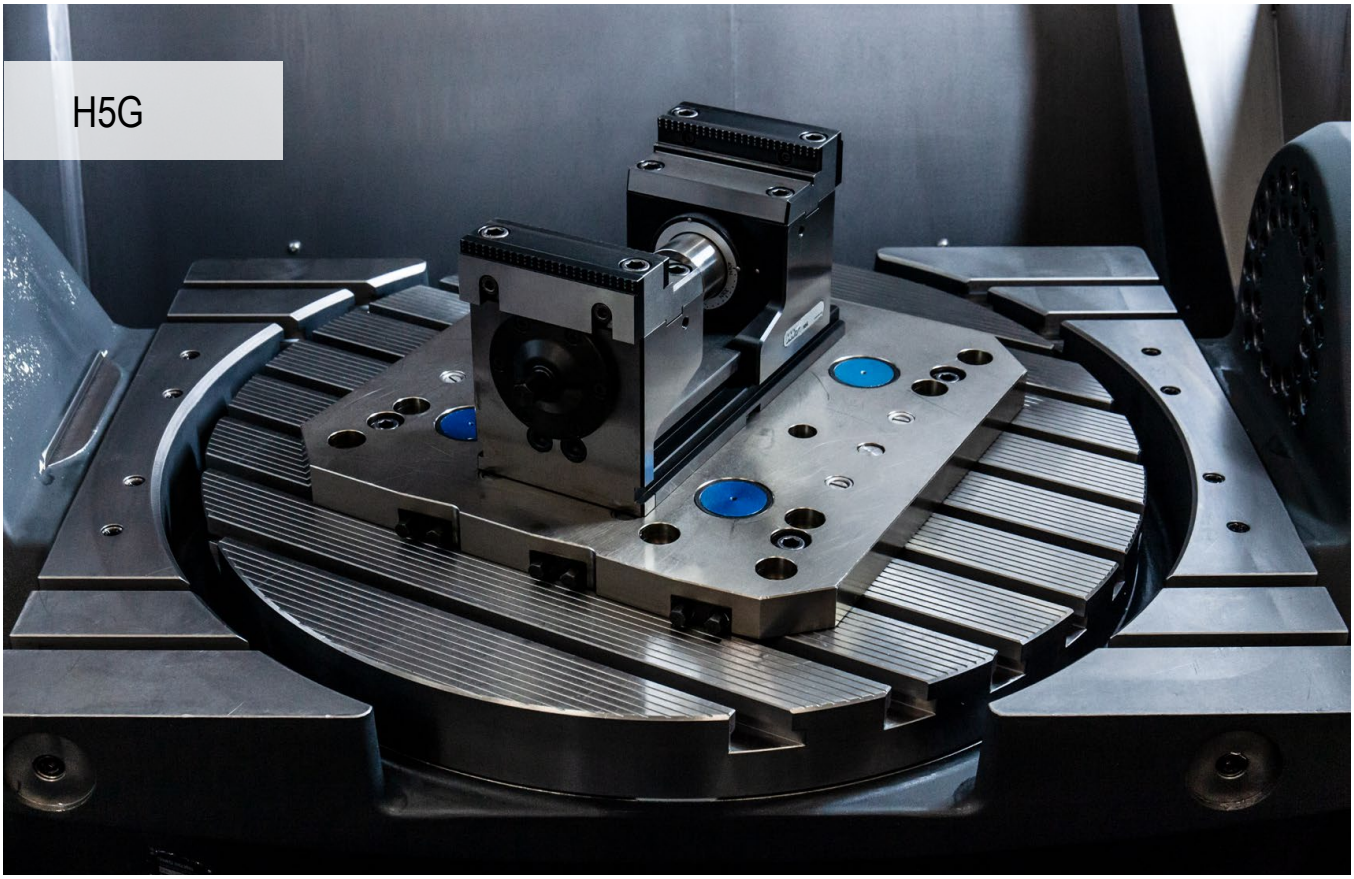

5-axis-optimised clamping system

The power-assisted clamping system for ‘real’ 5-axis complete and simultaneous machining.
1 and 2-sided machining with clamping under tension and 40 kN directly on the workpiece.

Your benefits:

- ▲ Quick conversion – adjustment of entire clamping range in just a few seconds
- ▲ Quick positioning with MNG on the machine table without an intermediate plate
- ▲ Clamping force can be continuously adjusted 4 – 40 kN
- ▲ 160° quick clamping
- ▲ Rotate jaws – quick and easy jaw change with 4 screws
- ▲ Easy cleaning, spindle fully protected
- ▲ Extensive modular jaw range

Clamping/aligning:

Clamping with two dowel screws dia. 12_{f7} / M12
Article no. 80 895 019

Alignment through 20^{H7} precision slot nuts in the base body (H5G) and alignment sets 14 / 16 / 18 in the machine table's T-slot. Clamping with clamping claws.

Alignment and clamping with MNG zero point clamping system (2-3 mounting bolts).
Optional: Positioning and fixing holes at the customer's request.

Alignment of extension base body:

- ▲ Loosely mount the extension base body
- ▲ Distance to basic base body 0.2 – 10 mm
- ▲ Slide movable supporting jaw overlapping onto both base bodies
- ▲ Align the extension base body so it is parallel with the basic base body
- ▲ Secure the extension base body

Fitting the drawbar extension:

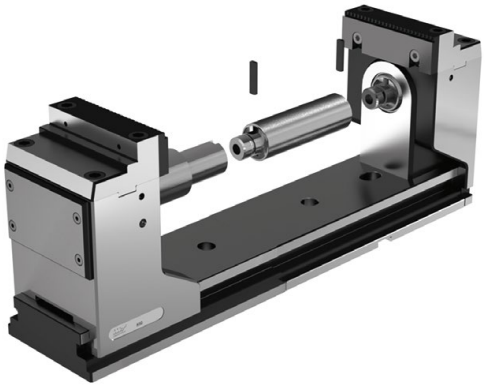

- ▲ Fit the extension base body (see alignment above)
- ▲ Screw the drawbar extension onto the spindle
- ▲ Insert the first anti-twist protection
- ▲ Slide the movable supporting jaw onto the extension base body
- ▲ Connect the extended drawbar to the fixed supporting jaw
- ▲ Insert the second anti-twist protection

Movable fixed jaw functional principle:

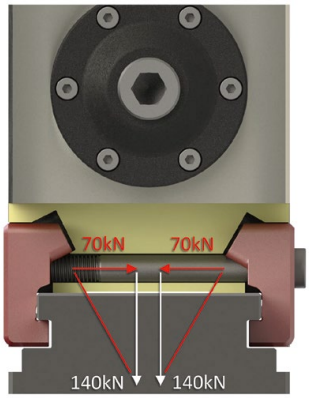

Double-acting screw = double the force
angled surfaces = double the force

In the case of the H5G-Z and H5G-Z-S, both supporting jaws can be moved as desired. The movable fixed jaw can be clamped on any position on the base body via 1 or 2 screws (1 = H5G-Z / 2 = H5G-Z-S) (tighten screw with 90 Nm). The clamping force of the fixed jaw is almost identical to that of the H5G which is secured with four screws.

SoloClamp – H5G

▲ 5-axis vice with quick adjustment, 174 mm height
▲ Crank handle quick clamping
▲ Vice with quick span adjustment
▲ 100 % encapsulated
▲ Vice with longitudinal and transverse grooves 20 H7 and alignment holes Ø 12 F7

Scope of supply:
Vice incl. 4 clamping claws, hand crank and clamping wrench

H5G **MNG**

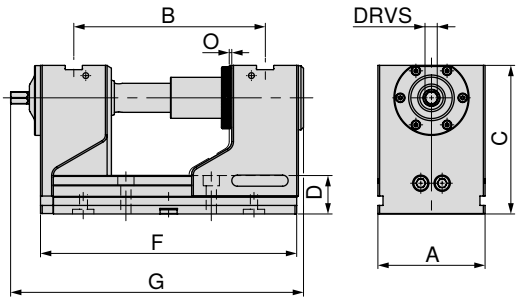

A mm	B mm	C mm	D mm	F mm	G mm	O mm	DRVS mm	MXC kN	WT kg	80 898 ... EUR Y4	
125	97 - 223	174	45	300	336,5	1	14	40	30,2	3.180,00	**125**

SoloClamp – H5G

▲ 5 axis high power vice, long version, 174 mm height

H5G

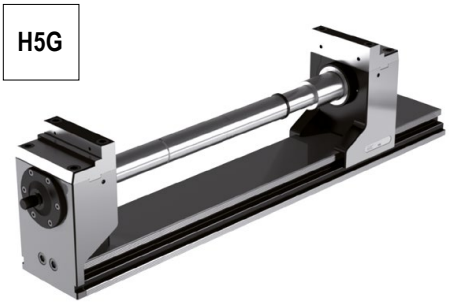

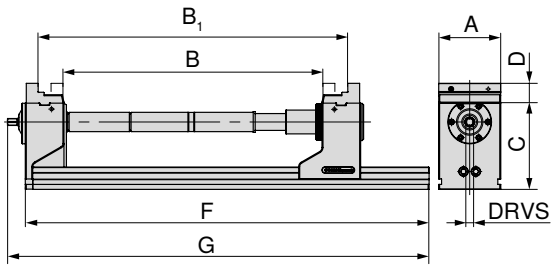

A mm	C mm	D mm	F mm	G mm	DRVS mm	Clamping force kN
125	174	40	815	851	14	40

B	B1	Article no.
0 – 126	123 – 251	**80 898 125**
125 – 252	248 – 374	**80 898 125** + **80 898 826** + **80 898 725**
250 – 376	372 – 499	**80 898 125** + **80 898 827** + **80 898 725**
375 – 501	498 – 624	**80 898 125** + **80 898 826** + **80 898 827** + **80 898 725**
500 – 626	622 – 749	**80 898 125** + 2 x **80 898 827** + **80 898 725**

The H5G 125 mm can be extended by a maximum of 250 mm with 2 extensions. The extension results in approximately 10% loss of clamping force.
Base plate available in long version with the desired hole pattern **on request**.

Vice guide

Underside Dimensions	27	Structural dimension tables for the different jaws	28–32
System accessories	33–36	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

SoloClamp – H5G-S

- ▲ 5-Axis vice with quick adjustment, 125 mm height
- ▲ Crank handle quick clamping
- ▲ Vice with quick span adjustment
- ▲ 100 % encapsulated
- ▲ Length F = 300 mm with Ø 25 H7 centering
- ▲ Length F = 265 mm with Ø 32 H6
- ▲ Vice with longitudinal and transverse grooves 20 H7 and alignment holes Ø 12 F7

Scope of supply:

Vice incl. 4 clamping claws, hand crank and clamping wrench

H5G -S | **MNG**

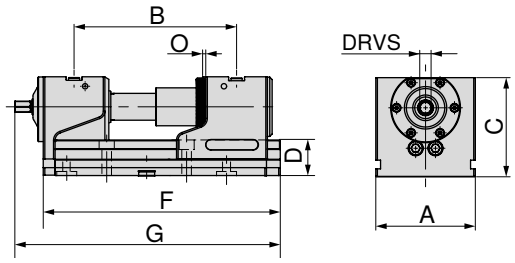

A mm	B mm	C mm	D mm	F mm	G mm	O mm	DRVS mm	MXC kN	WT kg	80 898 ... EUR Y4	
125	97 - 186	125	45	265	301,5	1	14	40	21,0	2.910,00	**123** [1]
125	97 - 223	125	45	300	336,5	1	14	40	22,6	2.980,00	**124**

1) not standardised

SoloClamp – H5G-S

- ▲ 5 axis high power vice, long version, 125 mm height

H5G -S

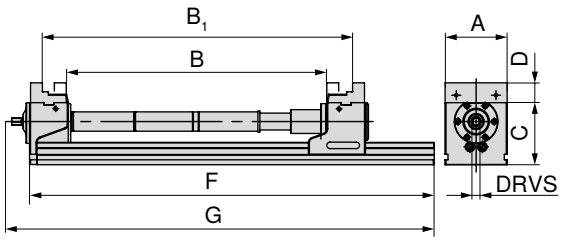

A mm	C mm	D mm	F mm	G mm	DRVS mm	Clamping force kN
125	125	40	815	851	14	40

B	B_1	Article no.
0 – 126	123 – 250	**80 898 124**
125 – 251	248 – 374	**80 898 124** + **80 898 826** + **80 898 725**
250 – 376	372 – 499	**80 898 124** + **80 898 827** + **80 898 725**
375 – 501	498 – 624	**80 898 124** + **80 898 826** + **80 898 827** + **80 898 725**
500 – 626	622 – 749	**80 898 124** + 2 x **80 898 827** + **80 898 725**

The H5G-S 125 mm can be extended by a maximum of 250 mm with 2 extensions. The extension results in approximately 10% loss of clamping force.
Base plate available in long version with the desired hole pattern **on request**.

Vice guide

Underside Dimensions	27	Structural dimension tables for the different jaws	28–32
System accessories	33–36	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

SoloClamp – H5G-Z

▲ 5-Axis vice with movable fixed jaw, 174 mm height
▲ Crank handle quick clamping
▲ Vice with quick span adjustment
▲ 100 % encapsulated
▲ Clamping on the machine table is possible with MNG/PNG, or directly through the base body

Scope of supply:
Incl. clamping key with hexagonal pin insert

H5G -Z | **MNG**

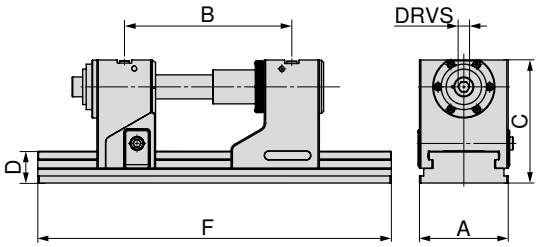

A mm	B ±0,015 mm	C mm	D mm	F mm	DRVS mm	MXC kN	WT kg	80 907 ... EUR Y4	
125	131 - 246	174	45	330	14	40	32,5	3.590,00	**12800**
125	131 - 352	174	45	430	14	40	36,0	3.650,00	**125**
125	131 - 422	174	45	500	14	40	38,5	3.810,00	**126**
125	131 - 552	174	45	630	14	40	43,0	4.130,00	**127**

→ **Page 36**
Here you will find the additional drawbar extensions that must be used to reach the maximum clamping ranges.

SoloClamp – H5G-Z-S

▲ 5-Axis vice with movable fixed jaw, 125 mm height
▲ Crank handle quick clamping
▲ Vice with quick span adjustment
▲ 100 % encapsulated
▲ Clamping on the machine table is possible with MNG/PNG, or directly through the base body

Scope of supply:
Incl. clamping key with hexagonal pin insert

H5G -Z-S | **MNG**

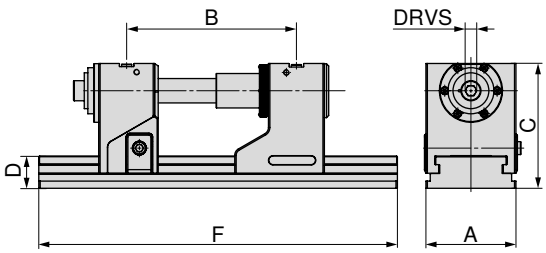

A mm	B ±0,015 mm	C mm	D mm	F mm	DRVS mm	MXC kN	WT kg	80 907 ... EUR Y4	
125	131 - 246	125	45	330	14	40	24,5	3.380,00	**22500**
125	131 - 352	125	45	430	14	40	28,5	3.430,00	**22600**
125	131 - 422	125	45	500	14	40	30,5	3.610,00	**22700**
125	131 - 552	125	45	630	14	40	35,5	3.930,00	**22800**

H5G/H5G-Z underside dimensions

Base width 125 mm and 265 mm length

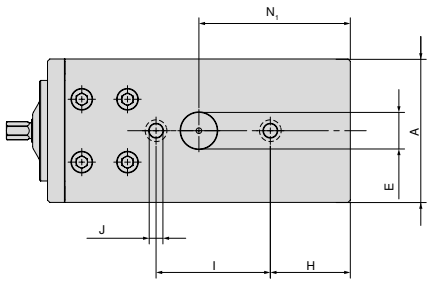

A mm	E H6 mm	H mm	I ±0,015 mm	J F7 mm	N1 mm
125	32	70	100	12	132,5

H5G with 265 mm length is not compatible with MNG

Base width 125 mm and 430 mm length

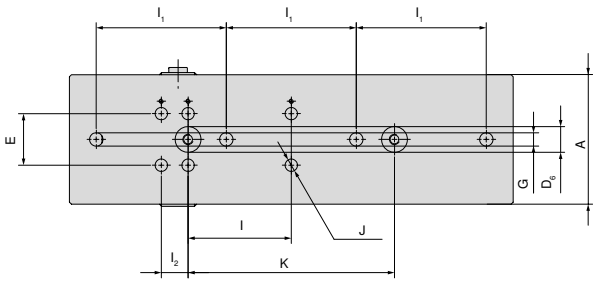

A mm	E ±0,01 mm	I1 ±0,3 mm	I2 mm	I ±0,015 mm	K ±0,015 mm	J H7 mm	G mm	D6 H6 mm
125	50	126	26	100	200	12	13	25

Base width 125 mm and length 300 mm

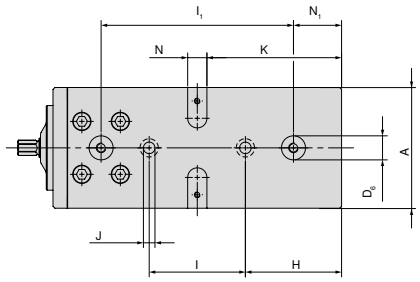

A mm	D6 H7 mm	H mm	I ±0,015 mm	J F7 mm	K mm	N H7 mm	I1 ±0,015 mm	N1 mm
125	25	100	100	12	140	20	200	50

Base width 125 mm and 500 mm length

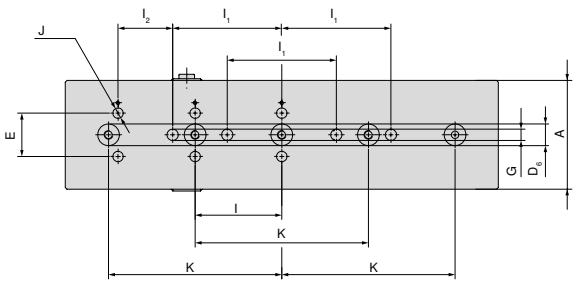

A mm	E ±0,01 mm	I1 ±0,3 mm	I ±0,015 mm	K ±0,015 mm	I2 mm	G mm	D6 H6 mm	J H7 mm
125	50	126	100	200	63	13	25	12

Base width 125 mm and 330 mm length

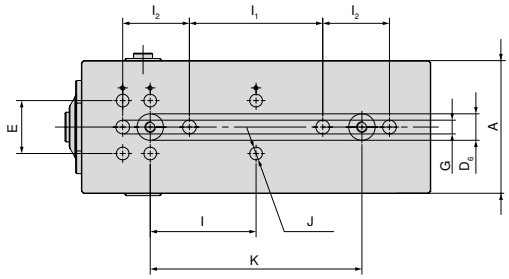

A mm	E ±0,01 mm	I ±0,015 mm	I2 mm	I1 ±0,3 mm	D6 H6 mm	J H7 mm	K ±0,015 mm	G mm
125	50	100	26	126	25	12	200	13

Base width 125 mm and 630 mm length

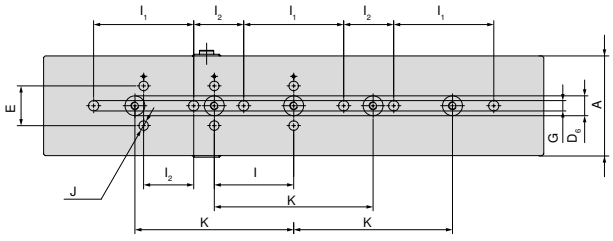

A mm	E ±0,01 mm	I1 ±0,3 mm	I2 mm	I ±0,015 mm	K ±0,015 mm	G mm	D6 H6 mm	J H7 mm
125	50	126	63	100	200	13	25	12

H5G/H5G-S – Structural dimension table for the different jaws

With combi jaws

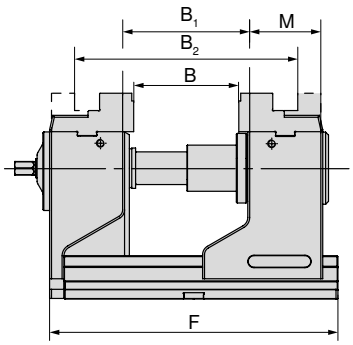

F mm	B mm	B_1 mm	B_2 mm	M mm	Article no. System jaws
265	0 - 89	22 - 112	123 - 212	76	**80 898 225**
300	0 - 126	22 - 149	123 - 249	76	**80 898 225**

H5G



A mm	C mm	D mm	E mm
–	–	–	–
125	174	40	214

H5G-S



A mm	C mm	D mm	E mm
125	125	40	165
125	125	40	165

With 5A top jaws, jaw width 65 mm

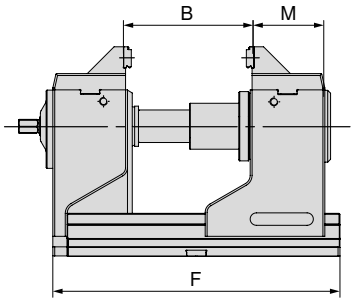

F mm	B mm	M mm	Article no. System jaws
265	16 - 105	79,5	**80 898 325**
300	16 - 142	79,5	**80 898 325**

H5G



A mm	A_1 mm	C mm	D mm	E mm
–	–	–	–	–
125	65	174	45	219

H5G-S



A mm	A_1 mm	C mm	D mm	E mm
125	65	125	45	170
125	65	125	45	170

With 5A top jaws, jaw width 125 mm

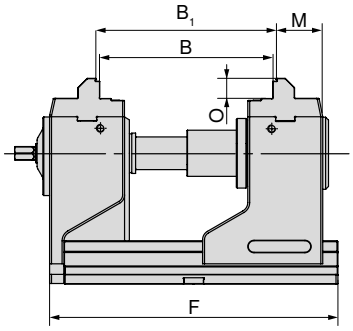

F mm	B mm	B_1 mm	O mm	M mm	Article no. System jaws
265	74 - 162	80 - 168	21	49	**80 907 300**
300	74 - 199	80 - 205	21	49	**80 907 300**

H5G



A mm	C mm	D mm	E mm
–	–	–	–
125	174	40	214

H5G-S



A mm	C mm	D mm	E mm
125	125	40	165
125	125	40	165

H5G/H5G-S – Structural dimension table for the different jaws

with soft jaws

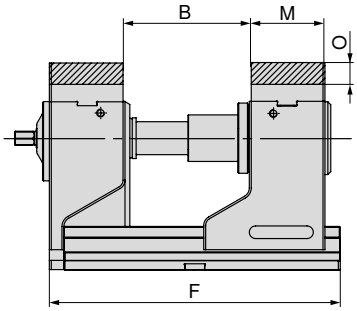

F mm	B mm	O mm	M mm	Article no. System jaws
265	23 - 112	22	76	**80 898 625**
300	23 - 149	22	76	**80 898 625**

H5G



A mm	C mm	D mm	E mm
–	–	–	–
125	174	40	214

H5G-S



A mm	C mm	D mm	E mm
125	125	40	165
125	125	40	165

With indexable jaws, grip 3 mm

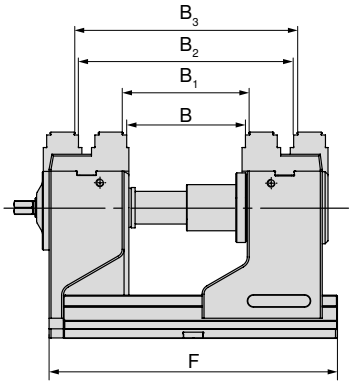

F mm	B mm	B_1 mm	B_2 mm	B_3 mm	Article no. System jaws
265	17 - 106	23 - 112	117 - 206	123 - 212	**80 898 35000**
300	17 - 140	23 - 146	117 - 240	123 - 246	**80 898 35000**

H5G



A mm	C mm	D mm	E mm
–	–	–	–
125	174	40	214

H5G-S



A mm	C mm	D mm	E mm
125	125	40	165
125	125	40	165

With pendulum and adapter plate



F mm	B mm	Article no. System jaws
265	17 - 236	**80 898 525 + 80 898 425**
300	17 - 274	**80 898 525 + 80 898 425**

H5G



A mm	A_1 mm	C mm	D mm	E mm
–	–	–	–	–
125	192	174	22	214

H5G-S



A mm	A_1 mm	C mm	D mm	E mm
125	192	125	22	165
125	192	125	22	165

H5G/H5G-S – Structural dimension table for the different jaws

With 6-face jaw system

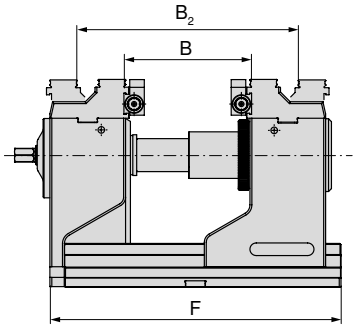

F mm	B mm	B_2 mm	O mm	M mm	Article no. System jaws
265	39 - 115	119 - 191	22	76	**80 898 230**
300	39 - 152	119 - 228	22	76	**80 898 230**

H5G



A mm	B_1 mm	C mm	D mm	E mm
–	–	–	–	–
125	37 - 101	174	40	214

H5G-S



A mm	B_1 mm	C mm	D mm	E mm
125	37 - 101	125	40	165
125	37 - 101	125	40	165

H5G-Z/-S structural dimension table for the different jaws

With combi jaws

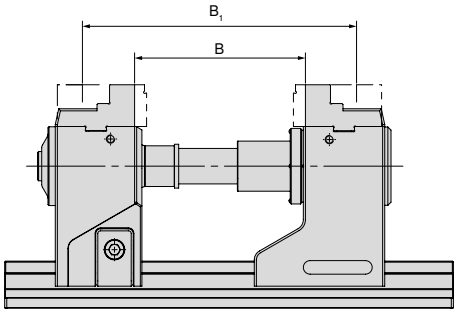

Variant	B mm	B_1 mm	Article no. System jaws
H5G-Z	57 - 182	157 - 282	**80 898 225**
H5G-Z-S	47 - 172	147 - 272	**80 898 225**

H5G-Z



A mm	C mm	D mm	E mm
125	174	40	214
–	–	–	–

H5G-Z-S



A mm	C mm	D mm	E mm
–	–	–	–
125	125	40	165

With 5A stepped top jaws

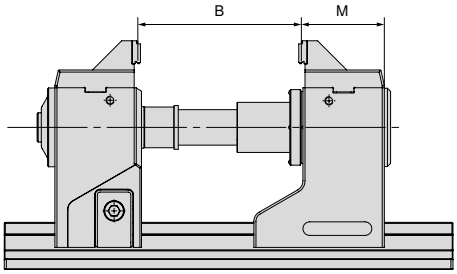

Variant	B mm	M mm	Article no. System jaws
H5G-Z	50 - 175	74	**80 898 325**
H5G-Z-S	40 - 165	74	**80 898 325**

H5G-Z



A mm	A_1 mm	C mm	D mm	E mm
125	65	174	45	214
–	–	–	–	–

H5G-Z-S



A mm	A_1 mm	C mm	D mm	E mm
–	–	–	–	–
125	65	125	45	165

H5G-Z/-S structural dimension table for the different jaws

With indexable jaw grip 3 mm and 16 mm smooth step

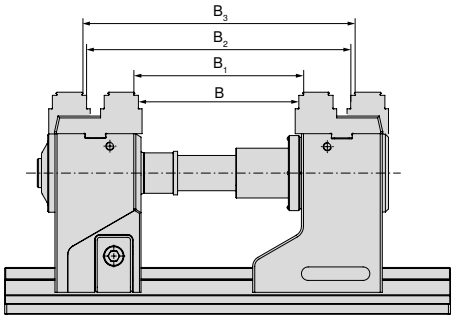

Variant	B mm	B1 mm	B2 mm	B3 mm	Article no. System jaws
H5G-Z	48 - 173	54 - 179	148 - 273	154 - 279	2 x **80 898 35000**
H5G-Z-S	38 - 173	44 - 169	138 - 263	144 - 269	2 x **80 898 35000**

H5G-Z



A mm	C mm	D mm	E mm
125	174	40	214
–	–	–	–

H5G-Z-S



A mm	C mm	D mm	E mm
–	–	–	–
125	125	40	165

With 5A top jaw, jaw width 125 mm

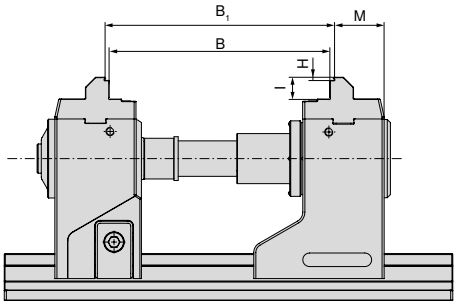

Variant	B mm	B1 mm	H mm	I mm	M mm	Article no. System jaws
H5G-Z	105 - 230	111 - 236	3	21	48,7	2 x **80 907 300**
H5G-Z-S	95 - 220	101 - 226	3	21	48,7	2 x **80 907 300**

H5G-Z



A mm	C mm	D mm	E mm
125	174	40	214
–	–	–	–

H5G-Z-S



A mm	C mm	D mm	E mm
–	–	–	–
125	125	40	165

with soft jaws

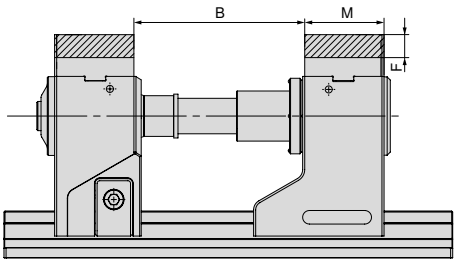

Variant	B mm	F mm	M mm	Article no. System jaws
H5G-Z	57 - 182	22	76	**80 898 625**
H5G-Z-S	47 - 172	22	76	**80 898 625**

H5G-Z



A mm	C mm	D mm	E mm
125	174	40	214
–	–	–	–

H5G-Z-S



A mm	C mm	D mm	E mm
–	–	–	–
125	125	40	165

H5G-Z/-S structural dimension table for the different jaws

With pendulum and adapter plate

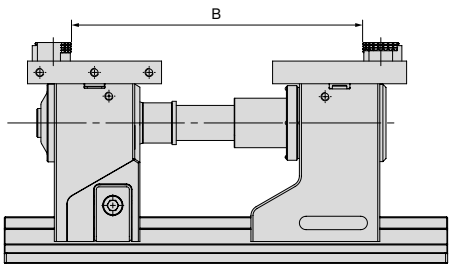

Variant	B mm	Article no. System jaws
H5G-Z	11 - 300	**80 898 525 + 80 898 425**
H5G-Z-S	11 - 290	**80 898 525 + 80 898 425**

H5G-Z



A mm	A_1 mm	C mm	D mm	E mm
125	192	174	40	214
–	–	–	–	–

H5G-Z-S



A mm	A_1 mm	C mm	D mm	E mm
–	–	–	–	–
125	192	125	40	165

With 6-face jaw system

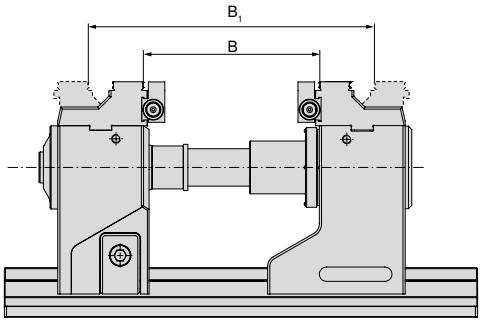

Variant	B mm	B_2 mm	Article no. System jaws
H5G-Z	52 - 177	152 - 277	**80 898 230**
H5G-Z-S	42 - 167	142 - 267	**80 898 230**

H5G-Z



A mm	B_1 mm	C mm	D mm	E mm
125	37 - 101	174	40	214
–	–	–	–	–

H5G-Z-S



A mm	B_1 mm	C mm	D mm	E mm
–	–	–	–	–
125	37 - 101	125	40	165

Clamping ranges also apply to 500 mm and 630 mm base bodies. Extended clamping ranges with drawbar extension possible.
The specified clamping ranges can sometimes only be achieved using top jaws.

System jaws overview

5A stepped top jaw

▲ including 125/65 mm attachment and 3 mm grip step
▲ price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125	65	45	42			76			377,00	**80 898 325**		●									

5A – Top jaw

▲ Improved accessibility through tapered rear section
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40	37	18		78			354,00	**80 907 300**		●									

Combi reversable jaw

▲ to extend the clamping range
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40	22			76			377,00	**80 898 225**		●									

Soft Alu-jaw

▲ for producing shaped jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40				76			111,00	**80 898 625**		●									

System jaws overview

Indexable jaw, grip 3 mm, 16 mm smooth step, on both sides

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40	37	24		82,5			399,00	**80 898 35000**		●									

Pendulum jaw, movable

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	192		22				130			491,00	**80 898 525**		●									

Adapter plate

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	192		22				130			414,00	**80 898 425**		●									

6 function indexable jaw

▲ 1 = Smooth, carbide coated
▲ 2 = Grip with 3 mm step
▲ 3 = Grip with 8 mm step
▲ 4 = Grip with 18 mm step
▲ 5 = Rough grip with 8 mm step
▲ 6 = Round grip
▲ M_{max} = 60 Nm
▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

System jaws overview

6x indexable jaw, carbide grip

- ▲ 1 = Smooth
- ▲ 2 = Carbide grip
- ▲ 3 = Carbide grip with 3 mm step
- ▲ 4 = Carbide grip with 8 mm step
- ▲ 5 = Round carbide grip with 8 mm step
- ▲ 6 = Round carbide grip
- ▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

6 face jaw system for 125 mm jaw width

Scope of supply:

2 System jaws with 2 pairs of transverse jaws in T-slot guidance incl. fixing screws

H5G -S

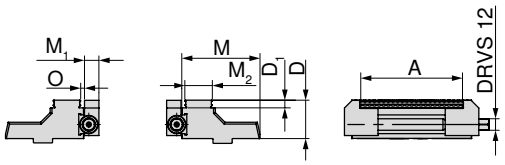

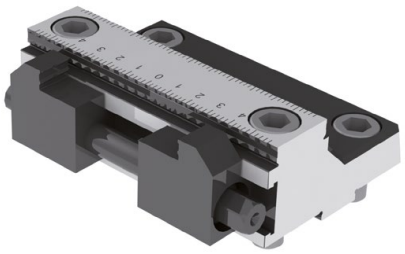

for width	A	D	D_1	M	M_1	M_2	O	WT	**80 898 ...** EUR Y4	
mm	mm	mm	mm	mm	mm	mm	mm	kg		
125	37 - 101	40	8	81,5	15	28,7	3,2	4,5	1.760,00	**230**

System accessories overview

Drawbar

▲ Incl. anti-rotation

H5G | H5G -S | H5G -Z



G mm	80 898 ... EUR Y4	
125	360,00	826
250	408,00	827

Base plate to extend

H5G





A mm	D mm	M mm	80 898 ... EUR Y4	
250	45	125,5	644,00	725

Anti-twist plate

H5G | H5G -S | H5G -Z | H5G -Z-S



80 898 ... EUR Y4	
12,40	024

Hand crank

▲ for fast adjustment

DRVS mm	H5G-Z X5G-Z 80 907 ... EUR Y4		H5G-S H5G-Z-S 80 898 ... EUR Y4		H5G 80 898 ... EUR Y4	
14	81,00	500	81,00	026	81,00	025

Protection plugs

▲ Price per piece

H5G -Z

D_1 mm	80 907 ... EUR Y4	
19	1,20	501

Clamping lever

▲ including control accessories

NCG | NCG 5A | H5G

DRVS mm	80 890 ... EUR Y4	
14	128,00	501

Clamping Handle with Joint

▲ without socket

H5G -Z | H5G -Z-S | ESG 4 | ESG mini | ZSG 4

Square	80 891 ... EUR Y4	
1/2"	76,10	600

Socket

▲ Suitable for 1/2" or 3/8" square drive

H5G -Z | ESG mini | MSG 2 | Verso | MNG

Square	DRVS mm	80 877 ... EUR Y4	
1/2"	14	18,20	214

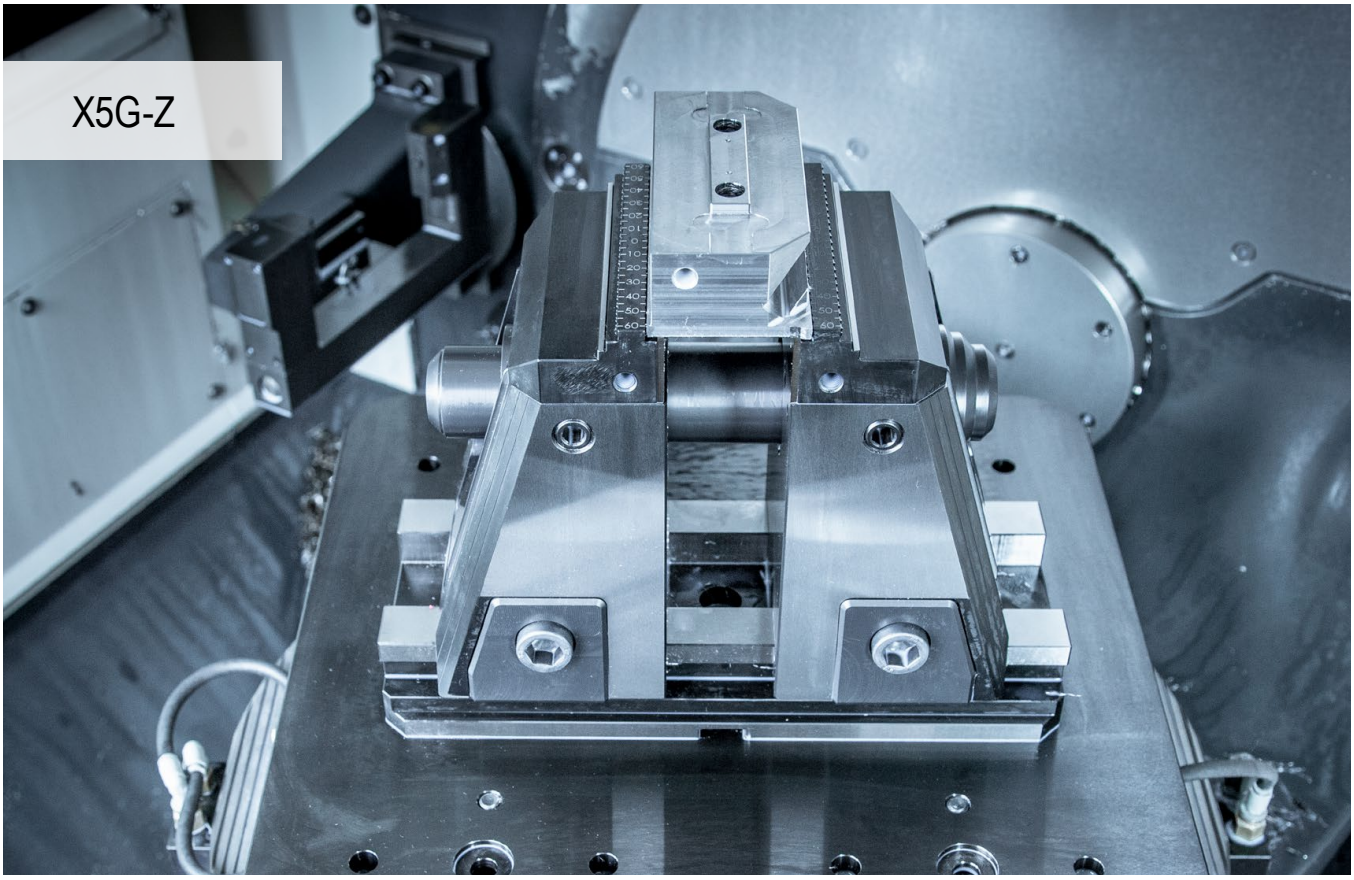

5-axis machining to perfection

Maximum ease of handling and integrated pull-down action for 6-sided machining. X5G-Z is the new 5-axis vice from CERATIZIT. All the advantages that ensure optimum and simple 5- and 6-sided machining combined in a single clamping device.

Your benefits:

- ▲ Either 5 and 6-axis machining thanks to clamping of one or both supporting jaws
- ▲ Fast jaw changeover without tools
- ▲ Optimum accessibility from all sides and large base clamping stroke of 130 mm
- ▲ Fully encapsulated, mechanical spindle
- ▲ Integrated, internal elastomer damping to minimise vibrations
- ▲ Extensive modular jaw range

Clamping/aligning:

Clamping with two dowel screws dia. 12_{f7} / M12 and clamping screws **Article no. 80 895 019**

Alignment through 20^{H7} precision slot nuts in the base body in the machine table's T-slot. Clamping with clamping claws.

Alignment and clamping with MNG zero point clamping system (2-3 mounting bolts). **Optional:** Positioning and fixing holes at the customer's request.

17

Clamping force:

Size		Max. tightening torque in Nm	max. clamping force in kN
X5G-Z	Blank clamping	100	50
X5G-Z	Precision clamping	120	40
X5G-Z-S	Blank clamping	100	50
X5G-Z-S	Precision clamping	120	34

X5G-Z tightening torque/clamping force

Blank clamping

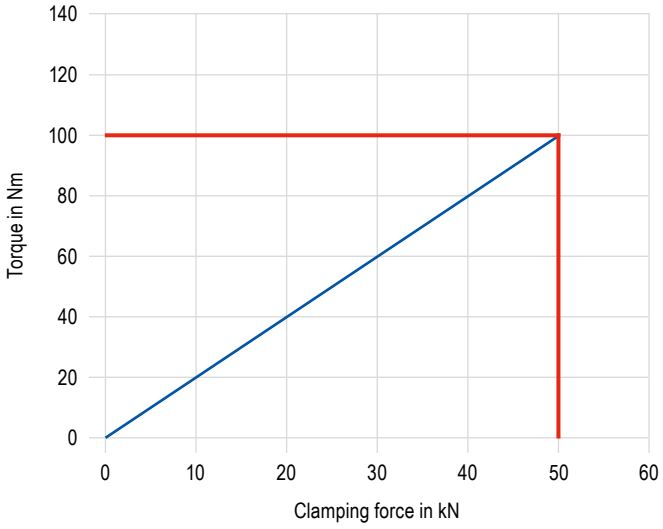

Precision clamping

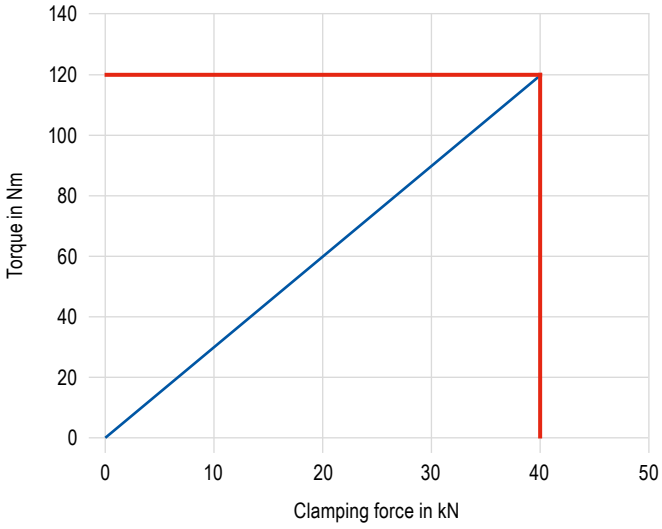

X5G-Z-S tightening torque/clamping force

Blank clamping

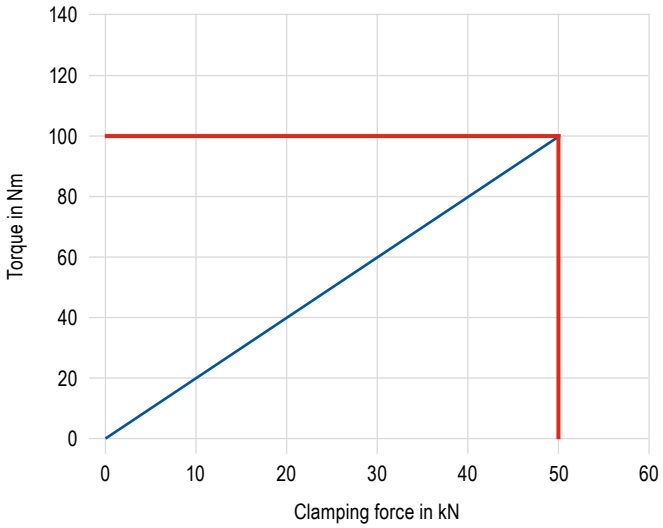

Precision clamping

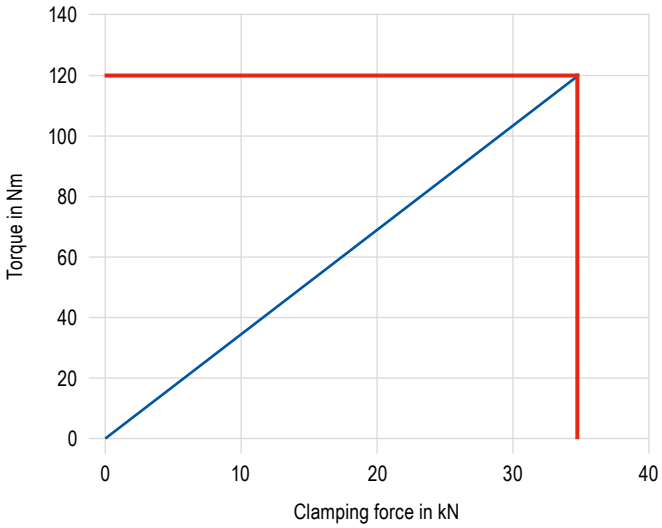

SoloClamp – X5G-Z

- ▲ Mechanical 5-axis vice with movable fixed jaws, 181 mm height
- ▲ Without system jaws
- ▲ Optimum accessibility
- ▲ 5- and 6-sided machining possible
- ▲ Fast jaw changeover
- ▲ Clamping on the machine table is possible with MNG/PNG, or directly through the base body

X5G -Z

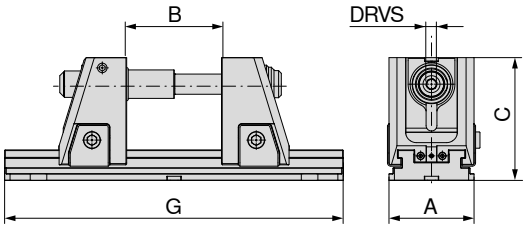

A mm	B mm	C mm	G mm	DRVS mm	MXC kN	WT kg	80 908 ... EUR Y4	
125	4 - 134	181	330	14	40	33,2	3.170,00	**52500**
125	4 - 234	181	430	14	40	36,1	3.400,00	**52600**
125	4 - 304	181	500	14	40	38,1	3.540,00	**52700**
125	4 - 434	181	630	14	40	41,8	3.800,00	**52800**
125	4 - 604	181	800	14	40	46,6	4.140,00	**52900**

Basic clamping stroke 130 mm

→ **Page 48**
Here you will find the additional drawbar extensions that must be used to reach the maximum clamping ranges.

→ **Page 42–44**
Here you will fin the structural dimension tables for the different jaws.

Vice guide

Underside Dimensions	41	System accessories	45
MNG-/PNG zero point clamping system	134–163	General accessories	164–183

17

SoloClamp – X5G-Z-S

- ▲ Mechanical 5-axis vice with movable fixed jaws, 142 mm height
- ▲ Without system jaws
- ▲ Optimum accessibility
- ▲ 5- and 6-sided machining possible
- ▲ Fast jaw changeover
- ▲ Clamping on the machine table is possible with MNG/PNG, or directly through the base body

X5G -Z-S

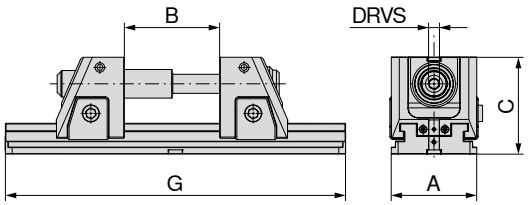

A mm	B mm	C mm	G mm	DRVS mm	MXC kN	WT kg	80 908 ... EUR Y4	
125	4 - 134	142	330	14	40	27,3	2.880,00	**42500**
125	4 - 234	142	430	14	40	30,2	3.110,00	**42600**
125	4 - 304	142	500	14	40	32,2	3.250,00	**42700**
125	4 - 434	142	630	14	40	35,9	3.510,00	**42800**
125	4 - 604	142	800	14	40	40,7	3.860,00	**42900**

Basic clamping stroke 130 mm

→ **Page 48**
Here you will find the additional drawbar extensions that must be used to reach the maximum clamping ranges.

→ **Page 42–44**
Here you will fin the structural dimension tables for the different jaws.

Vice guide

Underside Dimensions	41	System accessories	45
MNG-/PNG zero point clamping system	134–163	General accessories	164–183

X5G-Z/-S underside dimensions

Base width 125 mm and 330 mm length

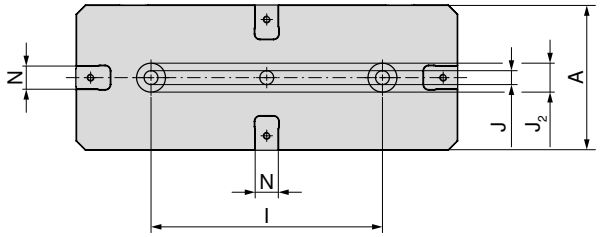

A mm	l ±0,02 mm	J H7 mm	J2 H6 mm	N H7 mm
125	200	12	25	20

Base width 125 mm and 630 mm length

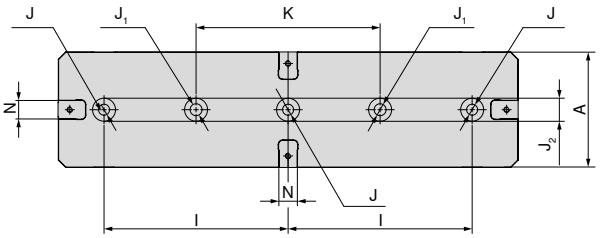

A mm	l ±0,02 mm	J H7 mm	J1 mm	J2 H6 mm	K ±0,02 mm	N H7 mm
125	200	12	13	25	200	20

Base width 125 mm and 430 mm length

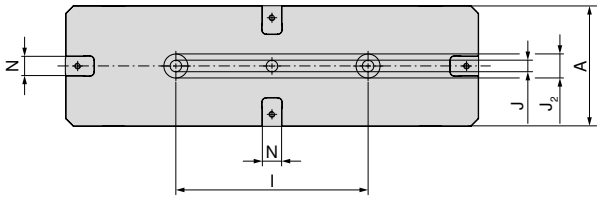

A mm	l ±0,02 mm	J H7 mm	J2 H6 mm	N H7 mm
125	200	12	25	20

Base width 125 mm and 800 mm length

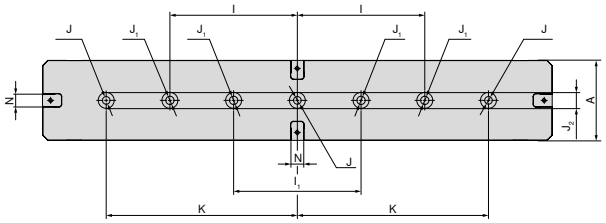

A mm	l ±0,02 mm	l1 ±0,02 mm	J H7 mm	J1 mm	J2 H6 mm	K ±0,02 mm	N H7 mm
125	200	200	12	13	25	300	20

Base width 125 mm and 500 mm length

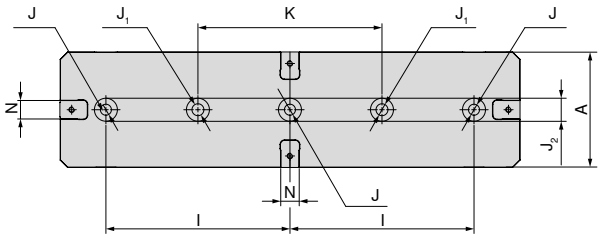

A mm	l ±0,02 mm	J H7 mm	J1 mm	J2 H6 mm
125	200	12	13	25

X5G-Z/-S structural dimension table for the different jaws

With indexable jaws, grip 3 mm

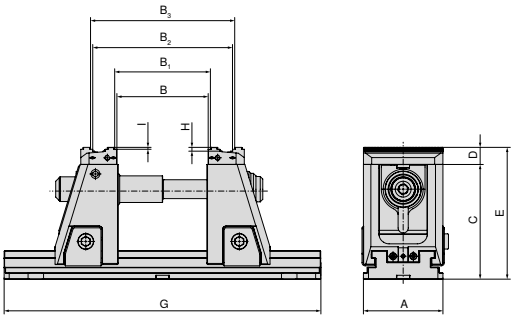

Type	Drawbar 430 mm 80 908 80000	Drawbar 500 mm 80 908 80100	Drawbar 630 mm 80 908 80200	Drawbar 800 mm 80 908 80300	A	B	B_1	B_2	B_3	C	D	E	G	H	I
80 908 52500					125	5–134	12–141	80–210	88–217	181	27	208	330	6	3
80 908 42500					125	5–134	12–141	80–210	88–217	142	27	169	330	6	3
80 908 52600	1 x				125	5–234	12–241	80–310	88–317	181	27	208	430	6	3
80 908 42600	1 x				125	5–234	12–241	80–310	88–317	142	27	169	430	6	3
80 908 52700	1 x	1 x			125	5–304	12–311	80–380	88–387	181	27	208	500	6	3
80 908 42700	1 x	1 x			125	5–304	12–311	80–380	88–387	142	27	169	500	6	3
80 908 52800	1 x	1 x	1 x		125	5–434	12–441	80–510	88–517	181	27	208	630	6	3
80 908 42800	1 x	1 x	1 x		125	5–434	12–441	80–510	88–517	142	27	169	630	6	3
80 908 52900	1 x	1 x	1 x	1 x	125	5–604	12–611	80–680	88–687	181	27	208	800	6	3
80 908 42900	1 x	1 x	1 x	1 x	125	5–604	12–611	80–680	88–687	142	27	169	800	6	3

With indexable jaws, grip 5 mm

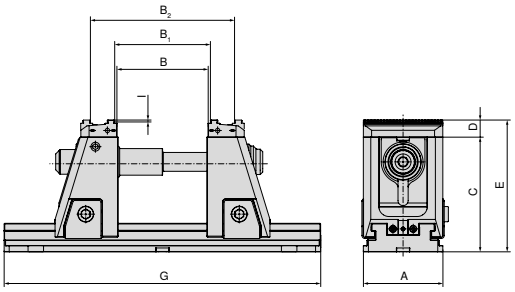

Type	Drawbar 430 mm 80 908 80000	Drawbar 500 mm 80 908 80100	Drawbar 630 mm 80 908 80200	Drawbar 800 mm 80 908 80300	A	B	B_1	B_2	C	D	E	G	I
80 908 52500					125	5–134	12–141	88–217	181	27	208	330	5
80 908 42500					125	5–134	12–141	88–217	142	27	169	330	5
80 908 52600	1 x				125	5–234	12–241	88–317	181	27	208	430	5
80 908 42600	1 x				125	5–234	12–241	88–317	142	27	169	430	5
80 908 52700	1 x	1 x			125	5–304	12–311	88–387	181	27	208	500	5
80 908 42700	1 x	1 x			125	5–304	12–311	88–387	142	27	169	500	5
80 908 52800	1 x	1 x	1 x		125	5–434	12–441	88–517	181	27	208	630	5
80 908 42800	1 x	1 x	1 x		125	5–434	12–441	88–517	142	27	169	630	5
80 908 52900	1 x	1 x	1 x	1 x	125	5–604	12–611	88–687	181	27	208	800	5
80 908 42900	1 x	1 x	1 x	1 x	125	5–604	12–611	88–687	142	27	169	800	5

→ **Page 48**
Here you will find the suitable drawbar extensions.

X5G-Z/-S structural dimension table for the different jaws

With stepped jaws, carbide grip 5 mm

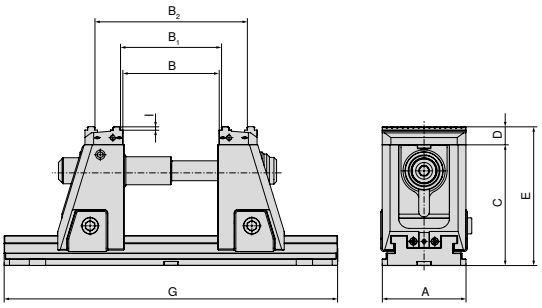

Type	Drawbar 430 mm 80 908 80000	Drawbar 500 mm 80 908 80100	Drawbar 630 mm 80 908 80200	Drawbar 800 mm 80 908 80300	A	B	B_1	B_2	C	D	E	G	I
80 908 52500					125	5–134	12–141	88–217	181	27	208	330	5
80 908 42500					125	5–134	12–141	88–217	142	27	169	330	5
80 908 52600	1 x				125	5–234	12–241	88–317	181	27	208	430	5
80 908 42600	1 x				125	5–234	12–241	88–317	142	27	169	430	5
80 908 52700	1 x	1 x			125	5–304	12–311	88–387	181	27	208	500	5
80 908 42700	1 x	1 x			125	5–304	12–311	88–387	142	27	169	500	5
80 908 52800	1 x	1 x	1 x		125	5–434	12–441	88–517	181	27	208	630	5
80 908 42800	1 x	1 x	1 x		125	5–434	12–441	88–517	142	27	169	630	5
80 908 52900	1 x	1 x	1 x	1 x	125	5–604	12–611	88–687	181	27	208	800	5
80 908 42900	1 x	1 x	1 x	1 x	125	5–604	12–611	88–687	142	27	169	800	5

With soft jaws, steel

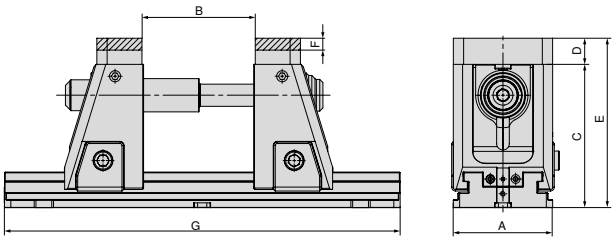

Article no. System jaws
2 x 80 909 31200

Type	Drawbar 430 mm 80 908 80000	Drawbar 500 mm 80 908 80100	Drawbar 630 mm 80 908 80200	Drawbar 800 mm 80 908 80300	A	B	C	D	E	F	G
80 908 52500					125	4–134	181	33	214	15	330
80 908 42500					125	4–134	142	33	175	15	330
80 908 52600	1 x				125	4–234	181	33	214	15	430
80 908 42600	1 x				125	4–234	142	33	175	15	430
80 908 52700	1 x	1 x			125	4–304	181	33	214	15	500
80 908 42700	1 x	1 x			125	4–304	142	33	175	15	500
80 908 52800	1 x	1 x	1 x		125	4–434	181	33	214	15	630
80 908 42800	1 x	1 x	1 x		125	4–434	142	33	175	15	630
80 908 52900	1 x	1 x	1 x	1 x	125	4–604	181	33	214	15	800
80 908 42900	1 x	1 x	1 x	1 x	125	4–604	142	33	175	15	800

→ Page 48
Here you will find the suitable drawbar extensions.

X5G-Z/-S structural dimension table for the different jaws

With indexable jaws embossed profile

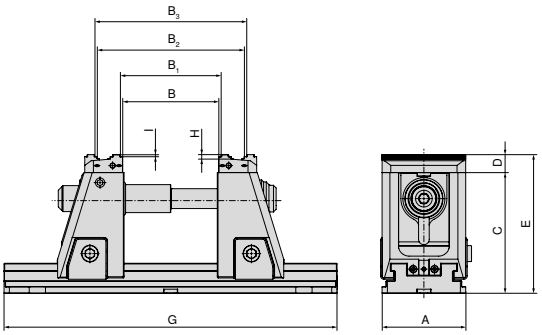

Article no. System jaws															
															2 x 80 908 31200
Type	Drawbar 430 mm **80 908 80000**	Drawbar 500 mm **80 908 80100**	Drawbar 630 mm **80 908 80200**	Drawbar 800 mm **80 908 80300**	**A**	**B**	**B_1**	**B_2**	**B_3**	**C**	**D**	**E**	**G**	**H**	**I**
80 908 52500					125	5–134	12–141	82–210	89–217	181	27	208	330	6	3
80 908 42500					125	5–134	12–141	82–210	89–217	142	27	169	330	6	3
80 908 52600	1 x				125	5–234	12–241	82–310	89–317	181	27	208	430	6	3
80 908 42600	1 x				125	5–234	12–241	82–310	89–317	142	27	169	430	6	3
80 908 52700	1 x	1 x			125	5–304	12–311	82–380	89–387	181	27	208	500	6	3
80 908 42700	1 x	1 x			125	5–304	12–311	82–380	89–387	142	27	169	500	6	3
80 908 52800	1 x	1 x	1 x		125	5–434	12–441	82–510	89–517	181	27	208	630	6	3
80 908 42800	1 x	1 x	1 x		125	5–434	12–441	82–510	89–517	142	27	169	630	6	3
80 908 52900	1 x	1 x	1 x	1 x	125	5–604	12–611	82–680	89–687	181	27	208	800	6	3
80 908 42900	1 x	1 x	1 x	1 x	125	5–604	12–611	82–680	89–687	142	27	169	800	6	3

With pendulum and adapter plate

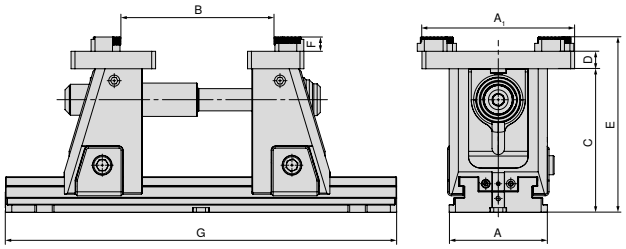

Article no. System jaws												
												80 909 31500 + 80 909 31300
Type	Drawbar 430 mm **80 908 80000**	Drawbar 500 mm **80 908 80100**	Drawbar 630 mm **80 908 80200**	Drawbar 800 mm **80 908 80300**	**A**	**B**	**C**	**D**	**E**	**F**	**G**
80 908 52500					125	42–210	181	22	221	18	330
80 908 42500					125	42–210	142	22	182	18	330
80 908 52600	1 x				125	42–310	181	22	221	18	430
80 908 42600	1 x				125	42–310	142	22	182	18	430
80 908 52700	1 x	1 x			125	42–380	181	22	221	18	500
80 908 42700	1 x	1 x			125	42–380	142	22	182	18	500
80 908 52800	1 x	1 x	1 x		125	42–510	181	22	221	18	630
80 908 42800	1 x	1 x	1 x		125	42–510	142	22	182	18	630
80 908 52900	1 x	1 x	1 x	1 x	125	42–680	181	22	221	18	800
80 908 42900	1 x	1 x	1 x	1 x	125	42–680	142	22	182	18	800

→ **Page 48**
Here you will find the suitable drawbar extensions.

System jaws overview

Indexable grip jaw, 3 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125	40	27	24			57			302,00	**80 908 30300**			●								
125	125	65	27	24			57			314,00	**80 908 30200**			●								
125	125	80	27	24			57			314,00	**80 908 30100**			●								
125	125	125	27	24			57			324,00	**80 908 30000**			●								

Indexable grip jaw, 5 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125	40	27	22			57			302,00	**80 908 30700**			●								
125	125	65	27	22			57			314,00	**80 908 30600**			●								
125	125	80	27	22			57			314,00	**80 908 30500**			●								
125	125	125	27	22			57			324,00	**80 908 30400**			●								

Indexable smooth jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		27							324,00	**80 908 31400**			●								

Stepped jaw, carbide grip 5 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125	40	27	22			57			358,00	**80 908 31100**			●								
125	125	65	27	22			57			370,00	**80 908 31000**			●								
125	125	80	27	22			57			380,00	**80 908 30900**			●								
125	125	125	27	22			57			392,00	**80 908 30800**			●								

System jaws overview

Soft jaw, steel

▲ Material: 16MnCr5
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		33				57			140,00	**80 909 31200**			●								

Indexable jaw embossed profile

▲ Price per piece
▲ suitable for LANG embossed profile



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		27	24			57			324,00	**80 908 31200**			●								

Adapter plate

▲ for holding 6-function indexable jaws
▲ Price per piece
▲ incl. cover screws



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	180		22				104			414,00	**80 909 31500**			●								

Floating jaw

▲ for holding 6-function indexable jaws
▲ Price per piece
▲ incl. cover screws



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	180		22				62			553,00	**80 909 31300**			●								

System jaws overview

6 function indexable jaw

- ▲ 1 = Smooth, carbide coated
- ▲ 2 = Grip with 3 mm step
- ▲ 3 = Grip with 8 mm step
- ▲ 4 = Grip with 18 mm step
- ▲ 5 = Rough grip with 8 mm step
- ▲ 6 = Round grip
- ▲ M_{max} = 60 Nm
- ▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

6x indexable jaw, carbide grip

- ▲ 1 = Smooth
- ▲ 2 = Carbide grip
- ▲ 3 = Carbide grip with 3 mm step
- ▲ 4 = Carbide grip with 8 mm step
- ▲ 5 = Round carbide grip with 8 mm step
- ▲ 6 = Round carbide grip
- ▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

Precision jaw

- ▲ Price per set



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		27	24			57			490,00	**80 908 31300**			●								

Procedure for hardened precision jaw set

The X5G-Z impresses with its extreme accuracy. All the components have been ground or hard-milled to a high level of precision. Despite this, there are still applications whereby the precision requirements cannot be satisfied in full due to the tolerance chain of the indexable grip jaws. For these situations we offer a hardened precision jaw set (article no. **80 908 31300**) that can be hard-milled by the customer on the clamping flat (both sides).

Hard machining is carried out in the precision vice (both screws on the supporting jaws tightened to 140 Nm). The precision jaws must be hard-milled as per the views shown (1+2). The reference tip supplied is used for clamping in the standard position (1). An end gauge can be used for clamping in the increased clamping range position (2).

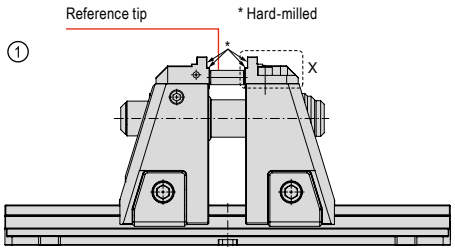

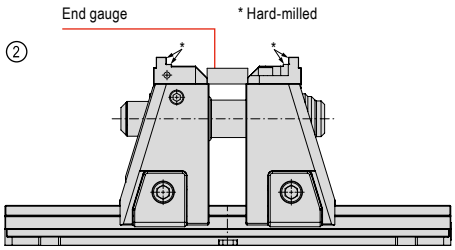

System accessories overview

Spindle unit X5G-Z



C mm	WT kg	80 908 ... EUR Y4	
227,5	2,5	392,00	**50100**

Drawbar



for width mm	G mm	80 908 ... EUR Y4	
125	430	164,00	**80000**
125	500	177,00	**80100**
125	630	205,00	**80200**
125	800	235,00	**80300**

Torque Wrench

▲ without socket

Square	TQX Nm	80 884 ... EUR Y4	
1/2"	10 - 100	280,00	**502**

Hand crank

▲ Version with external hex
▲ For quick adjustment

H5G-Z
X5G-Z

for width mm	DRVS mm	80 907 ... EUR Y4	
125	14	81,00	**500**

Socket

Square	DRVS mm	80 877 ... EUR Y4	
1/2"	14	18,20	**214**

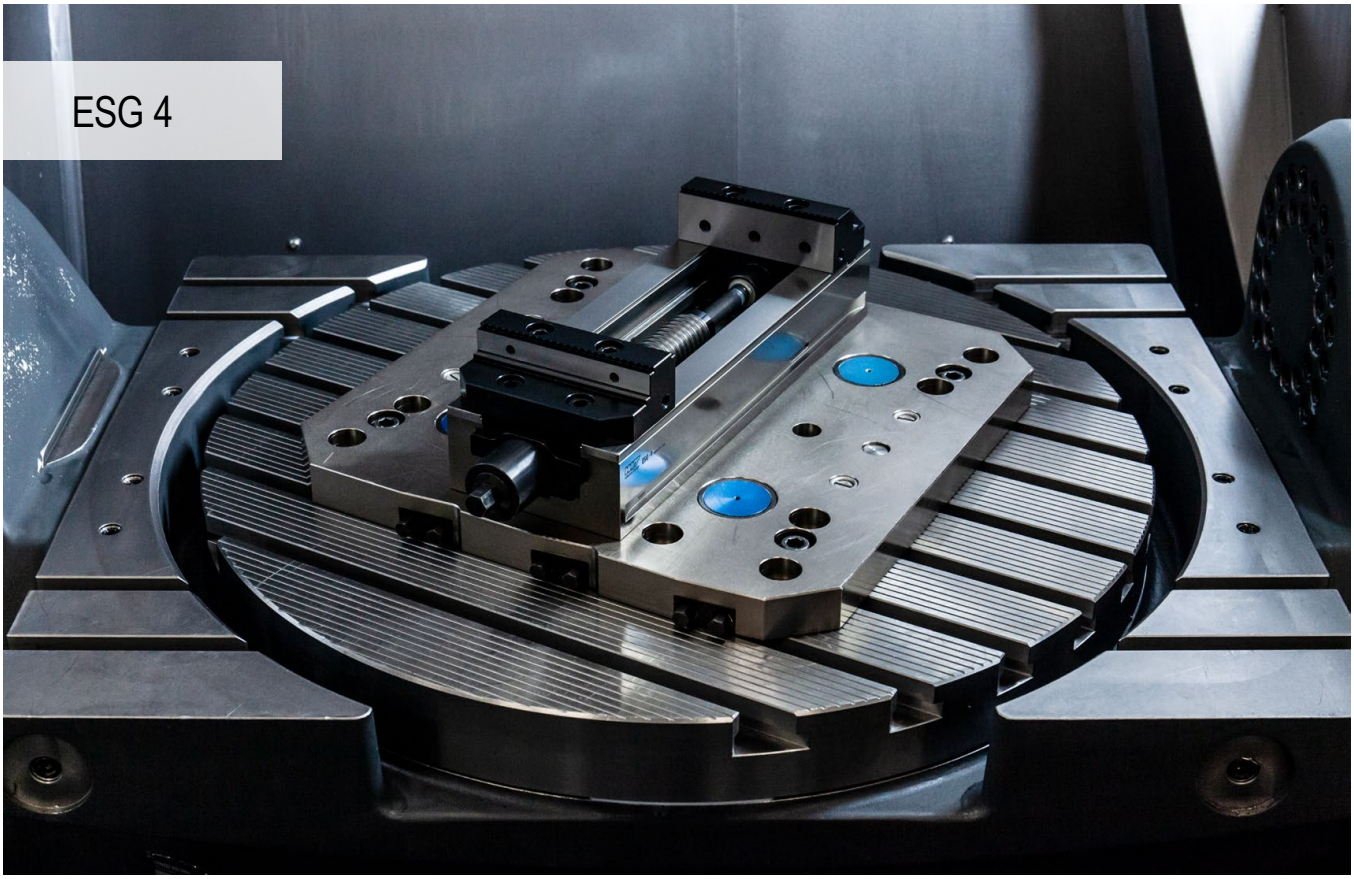

Highly-efficient all-rounder for machining unfinished and finished parts

The ESG 4 single vice impresses with fast handle clamping, quick setting of the clamping range, a flat design and low weight.

Your benefits:

- ▲ Several cooling lubricant flows for problem-free working and controlled outflow
- ▲ Quick and easy positioning on the MNG zero point clamping system
- ▲ High clamping force between 5 – 50 kN with low tightening torque
- ▲ Quick and easy jaw change with 2 screws
- ▲ Quick, simple disassembly of the spindle unit
- ▲ Extensive modular jaw range

Clamping/aligning:

ESG 4 – 80 mm = mounting with M8 screws through the base body
ESG 4 – 125 mm / 160 mm = mounting with M12 screws and dowel screws through the base body

Mounting with 4 clamping claws
Article no. 80 890 315

Mounting with zero point clamping systems
ESG 4 – 80 mm = 1 mounting bolt + anti-twist protection
ESG 4 – 125 / 160 mm = 2 mounting bolts, centre distance 200 mm

17

Clamping force:

ESG 4 – 80 mm tightening torque / clamping force

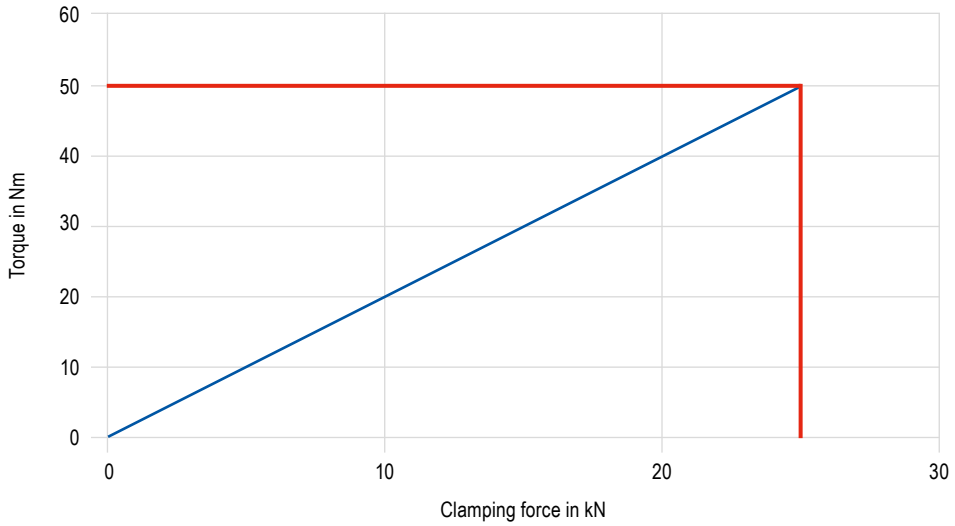

ESG 4 – 125 mm tightening torque/clamping force

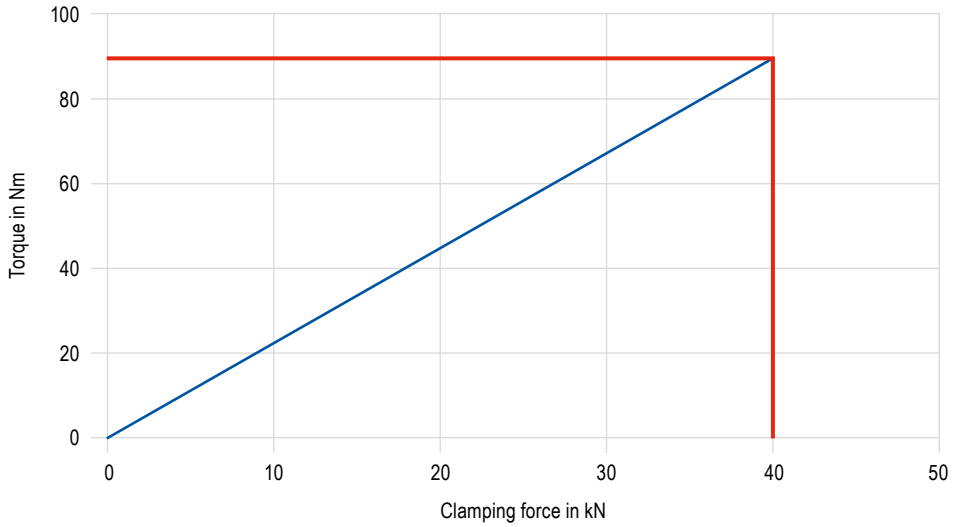

ESG 4 – 160 mm tightening torque / clamping force

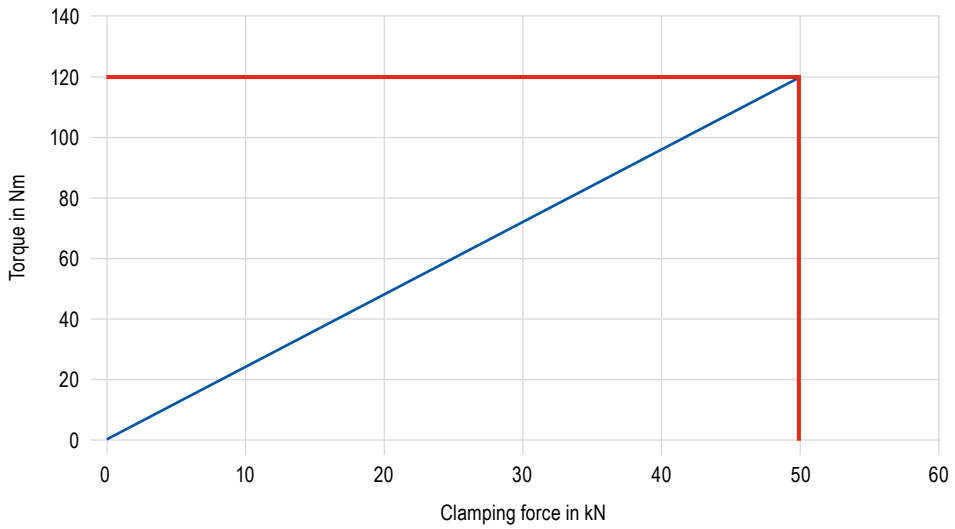

SoloClamp – ESG 4

- ▲ Single vice without system jaws
- ▲ Fast 160° handle clamping with torque key
- ▲ Rapid installation and removal of the spindle assembly
- ▲ ±0.01 mm repeatability (±0.015 mm when A = 160 mm)

ESG 4 | **MNG**

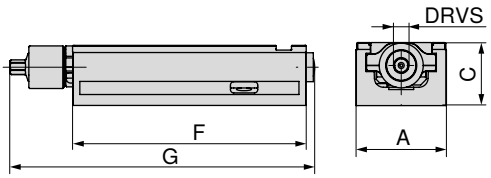

A	C -0.02	F	G	DRVS	MXC	WT	clamping range	80 901 ... EUR Y4	
mm	mm	mm	mm	mm	kN	kg	mm		
80	55	214	284	12	25	5,0	0-192	1.230,00	**080**
125	60	362	433	14	40	15,0	0-308	1.520,00	**125**
160	70	480	559	14	50	28,5	0-434	2.220,00	**160**

Vice guide

Underside Dimensions	52	Structural dimension tables for the different jaws	53+54
System accessories	55–58	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

ESG 4 underside dimensions

Base width 80 mm and length 214 mm

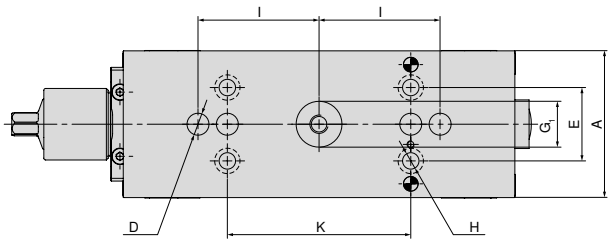

A	D	E	G_1	H	I	K
mm	mm	mm	mm	mm	mm	mm
80	12	40	25	9	66	100

Base width 125 mm and length 362 mm

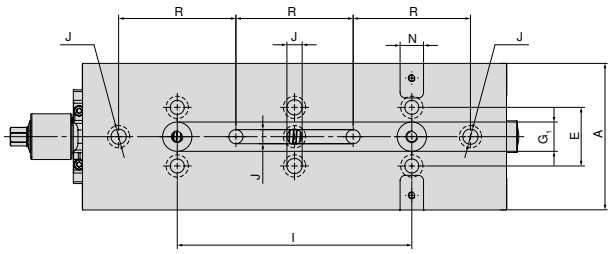

A	E	G_1	I	J	N_{H7}	R
mm	mm	mm	mm	mm	mm	mm
125	50	25	200	13	20	100

Base width 160 mm and length 480 mm

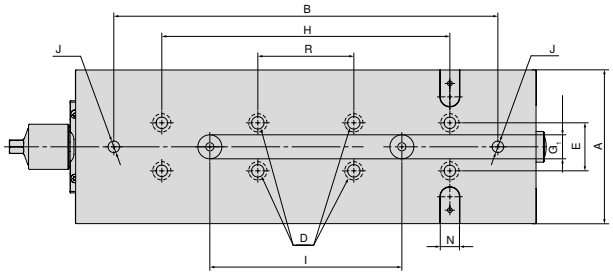

A	B	D	E	G_1	H	I	J	N_{H7}	R
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
160	400	13	50	25	300	200	12	20	100

ESG 4 structural dimension table for the different jaws

With block jaws

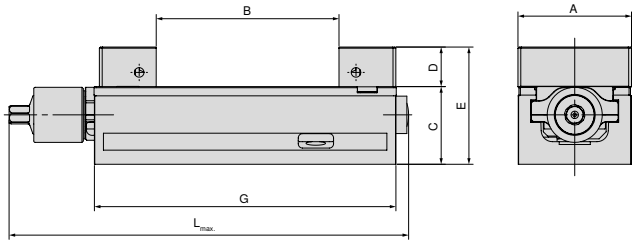

A mm	B mm	C mm	D mm	E mm	G mm	$L_{max.}$ mm	Article no. System jaws
80	0 - 130	55	28	83	214	308	**80 901 31200** + **80 901 31300**
125	0 - 231	60	40	100	362	432	**80 901 31400** + **80 901 31500**
160	0 - 312	70	50	120	480	559	**80 901 31600** + **80 901 31700**

With soft alu jaws

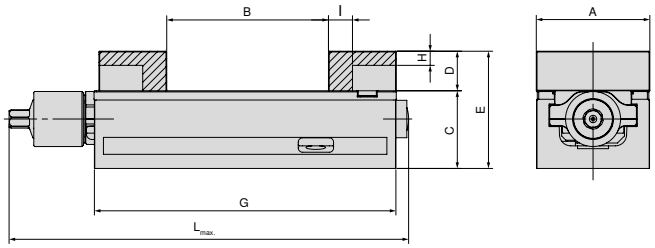

A mm	B mm	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
80	0 - 115	55	28	83	214	10	17	284	**80 901 307** + **80 878 850**
125	0 - 219	60	40	100	362	23	27	432	**80 901 304** + **80 878 550**
160	0 - 309	70	50	120	480	23	30	559	**80 901 301** + **80 878 305**

With pendulum and adapter plate

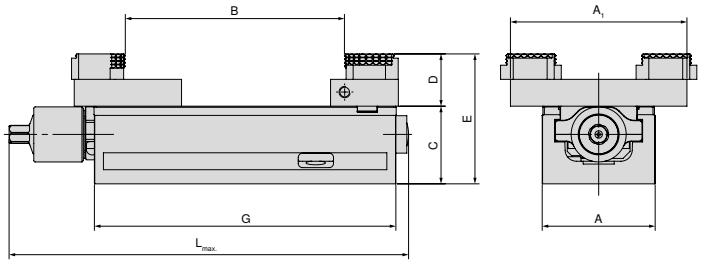

A mm	A_1 mm	B mm	C mm	D mm	E mm	G mm	$L_{max.}$ mm	Article no. System jaws
80	125	5 - 155	55	19	92	214	284	**80 878 870** + **80 901 501**
125	180	4 - 306	60	22	100	362	432	**80 878 570** + **80 901 502**
160	256	11 - 463	70	22	110	480	559	**80 878 670** + **80 901 503**

ESG 4 structural dimension table for the different jaws

With indexable jaws, grip 3 mm

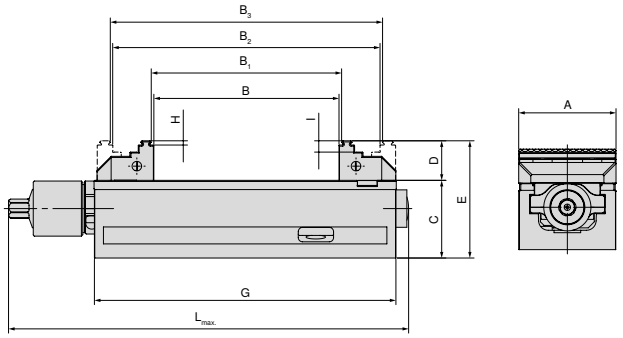

A mm	B mm	B_1 mm	B_2 mm	B_3 mm	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
80	0 - 130	4 - 134	59 - 188	63 - 192	55	28	83	214	3	8	284	**80 901 306** + **80 878 810**
125	0 - 231	8 - 238	71 - 301	78 - 308	60	40	100	362	3	18	433	**80 901 302** + **80 901 303**
160	0 - 310	8 - 317	117 - 427	125 - 434	70	50	120	480	3	10	559	**80 901 300** + **80 878 610**

With indexable jaws, grip 3 mm, width 40 mm

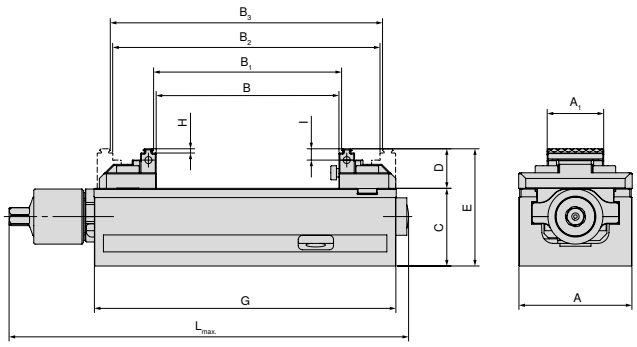

A mm	A_1 mm	B mm	B_1 mm	B_2 mm	B_3 mm	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
80	40	0 - 130	4 - 134	59 - 188	63 - 192	55	28	83	214	3	8	284	**80 901 308** + **80 878 81900**

With indexable jaws, grip 3 mm, height 65 mm

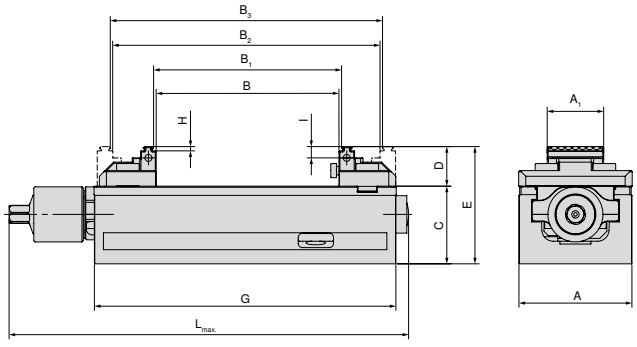

A mm	A_1 mm	B mm	B_1 mm	B_2 mm	B_3 mm	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
125	65	0 - 240	8 - 247	77 - 317	84 - 324	60	33	93	362	3	9	432	**80 901 305** + **80 878 51900**

System jaws overview

Indexable jaw, grip 3 mm, fixed

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			163,00	**80 901 306**				●	●						
125	125		40	37			66			224,00	**80 901 302**				●	●				●		
160	160		50	47			81			404,00	**80 901 300**				●	●						

Indexable jaw, grip 3 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			135,00	**80 878 810**				●	●		●		●		
125	125		40	37			66			224,00	**80 901 303**				●	●				●		
160	160		50	47			81			404,00	**80 878 610**				●	●		●				

Block jaw, fixed

▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				40			251,00	**80 901 31200**				●	●						
125	125		40				66			349,00	**80 901 31400**				●							
160	160		50				81			441,00	**80 901 31600**				●	●						

Block jaw, movable

▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				40			244,00	**80 901 31300**				●	●		●		●		
125	125		40				66			342,00	**80 901 31500**				●					●		
160	160		50				81			430,00	**80 901 31700**				●	●		●				

17

System jaws overview

Alu jaw, fixed

▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			101,00	**80 901 307**				●	●						
125	125		40				68			110,00	**80 901 304**				●							
160	160		50				85			124,00	**80 901 301**				●	●						

Alu jaw, movable

▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			86,40	**80 878 850**				●	●		●		●		
125	125		40				68			98,30	**80 878 550**				●					●		
160	160		50				85			124,00	**80 878 305**				●	●		●				

Soft jaw, steel, fixed

▲ Material: 16MnCr5
▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			104,00	**80 901 31800**				●	●						
125	125		40				68			125,00	**80 901 31900**				●	●						

Soft jaw, steel, movable

▲ Material: 16MnCr5
▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			89,10	**80 878 32000**				●	●		●				
125	125		40				68			112,00	**80 878 32100**				●	●		●				

System jaws overview

Reversible grip jaw, width 40 mm, fixed

▲ Price per piece
▲ Double-sided grip step



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80	40	28	25			40			196,00	**80 901 308**				●							

Indexable grip jaw 3 mm, width 40 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80	40	28	25			40			180,00	**80 878 81900**				●			●				

5-axis reversible grip jaw, width 65 mm, fixed

▲ price per piece
▲ double sided grip step



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	95	65	33	30			57			214,00	**80 901 305**				●							

5-axis indexable jaw, grip 3 mm, width 65 mm, movable

▲ double sided grip step
▲ price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	95	65	33	30			57			196,00	**80 878 51900**							●				

17

System jaws overview

Pendulum jaw, movable

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	125		19				76			409,00	**80 878 870**				●			●		●		
125	180		22				95			426,00	**80 878 570**				●			●		●		
160	256		22				170			726,00	**80 878 670**				●			●				

Adapter jaw

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	125		19				48			291,00	**80 901 501**				●							
125	180		22				62			346,00	**80 901 502**				●							
160	256		22				125			484,00	**80 901 503**				●							

6 function indexable jaw

▲ 1 = Smooth, carbide coated
▲ 2 = Grip with 3 mm step
▲ 3 = Grip with 8 mm step
▲ 4 = Grip with 18 mm step
▲ 5 = Rough grip with 8 mm step
▲ 6 = Round grip
▲ M_{max} = 60 Nm
▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

6x indexable jaw, carbide grip

▲ 1 = Smooth
▲ 2 = Carbide grip
▲ 3 = Carbide grip with 3 mm step
▲ 4 = Carbide grip with 8 mm step
▲ 5 = Round carbide grip with 8 mm step
▲ 6 = Round carbide grip
▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

The optimised ESG 5 – Maximum precision and process security

The new ESG 5 retains all the cherished characteristics of its predecessor and raises the bar significantly with regard to user-friendliness and durability. Optimised handling and improved durability were top of the list in the update for the single vice.

Your benefits:

- ▲ Specially designed for second side machining through high angular accuracy
- ▲ Compact design with ideal accessibility
- ▲ Jaw change Quick and easy with two screws
- ▲ The same clamping ranges, significantly improved interference contour, comprehensive modular jaw range
- ▲ Sustainable model with nickel-plated base body ensures a long service life

Clamping/aligning:

Mounting with zero point clamping system
ESG 5 – 80 mm L-130 mm + L-190 mm
ESG 5 – 125 mm L-160 mm + L-235 mm

1 mounting bolt + MNG-indexing bolt

Mounting with zero point clamping system
ESG 5 – 125 mm + L-300 mm
ESG 5 – 160 mm + L-280 mm + L-480 mm

2 mounting bolts

Dia. 12^{JS} precision holes are present in all variants for positioning the ESG 5 with precision. All variants can be mounted with screws from above through the base body.

Clamping/aligning:

ESG 5 – 125 mm L-235 mm + L-300 mm
ESG 5 – 160 mm L-280 mm + L-480 mm

These 4 variants can also be clamped with clamping claws as an alternative.

Clamping force:

ESG 5 – 80 mm tightening torque / clamping force

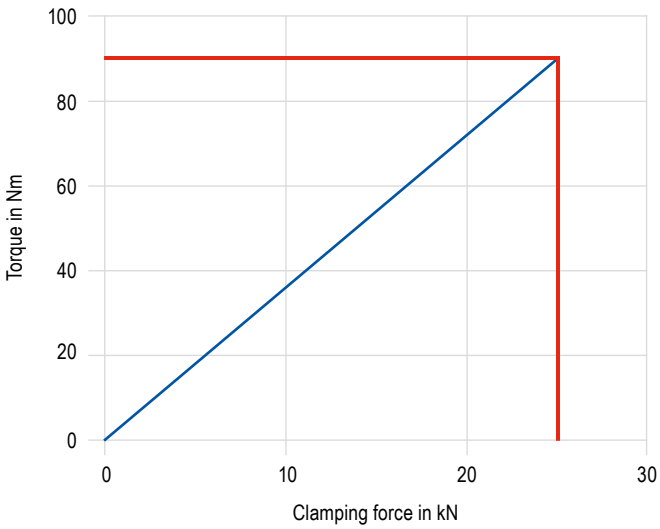

ESG 5 – 125 mm tightening torque / clamping force

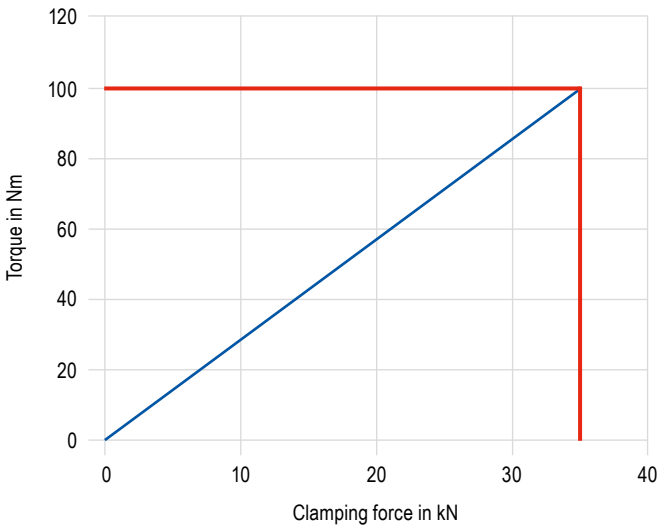

ESG 5 – 160 mm tightening torque / clamping force

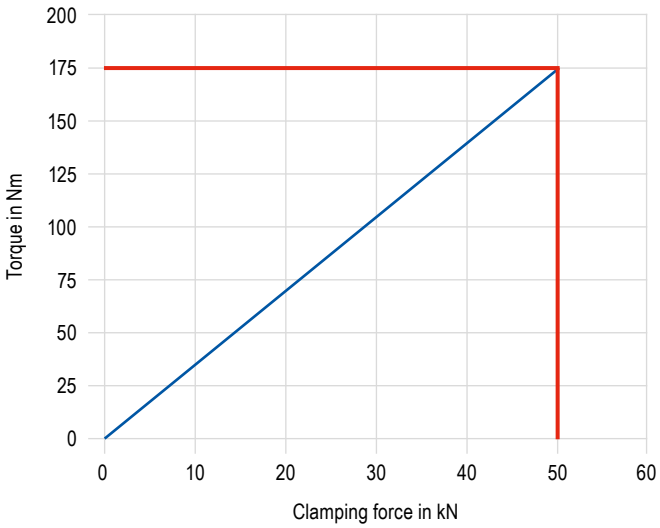

SoloClamp – ESG 5

▲ Single vice without system jaws
▲ Specially designed for second side machining through high angular accuracy
▲ ±0.01 mm repeatability between the clamping processes
▲ Suitable for PNG and MNG

ESG 5 | **MNG**

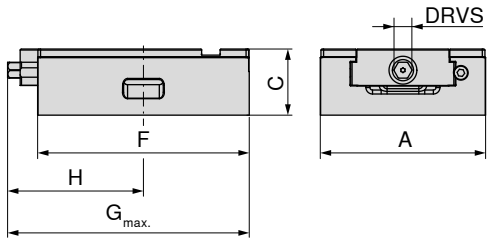

A mm	C ±0,01 mm	F mm	G max. mm	H mm	DRVS mm	MXC kN	WT kg	80 857 ... EUR Y4	
80	50	130	155,0	82	12	25	2,9	553,00	**08500**
80	50	190	203,0	102	12	25	4,4	665,00	**08600**
125	50	160	169,0	103	12	35	6,0	726,00	**15000**
125	50	235	235,0	132	12	35	8,4	927,00	**15100**
125	50	300	300,0	170	12	35	10,5	1.230,00	**15200**
160	70	280	309,0	169	14	50	25,0	1.710,00	**26100**
160	70	480	512,5	267	14	50	30,0	2.040,00	**26200**

Suitable for zero point clamping system							LANG Quick Point	LANG Quick Point
Article no.	Type	Width in mm	Height in mm	MNG	MNG mini	PNG	96 x 96	52 x 52
80 857 08500	ESG 5	80	130	✓	✓	✗	✗	✓
80 857 08600		80	190	✓	✗	✓	✗	✓
80 857 15000		125	160	✓	✗	✓	✓	✓
80 857 15100		125	235	✓	✗	✓	✓	✗
80 857 15200		125	300	✓	✗	✓	✓	✗
80 857 26100		160	280	✓	✗	✓	✓	✗
80 857 26200		160	480	✓	✗	✓	✗	✗

Vice guide

Underside Dimensions	63+64	Structural dimension tables for the different jaws	65
System accessories	66	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

SoloClamp – ESG 5

▲ Sealed single vice for Erowa ITS 148
▲ Without system jaws
▲ Specially designed for second side machining through high angular accuracy
▲ ±0.01 mm repeatability between the clamping processes

ESG 5

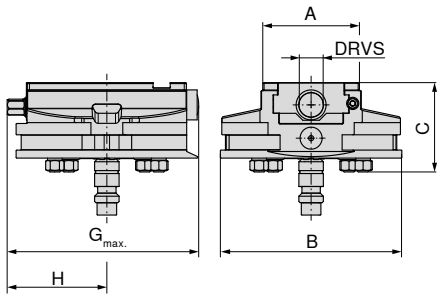

A	B	C	$G_{max.}$	H	DRVS	MXC	WT	80 857 ...
mm	mm	mm	mm	mm	mm	kN	kg	EUR
								Y4
80	148	73	157	81	12	25	5,6	1.370,00 **08900**

Vice guide

Underside Dimensions	63+64	Structural dimension tables for the different jaws	65
System accessories	66	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

ESG 5 underside dimensions

Base width 80 mm and length 130 mm

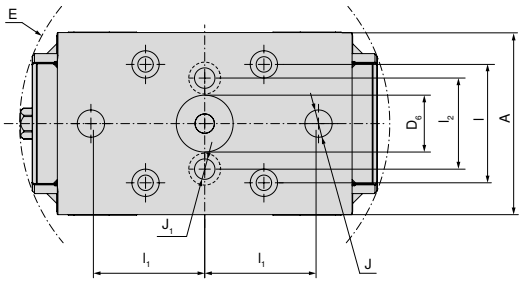

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm	J_1 mm
80	25	163	52	50	40	12	9

Base width 80 mm and length 190 mm

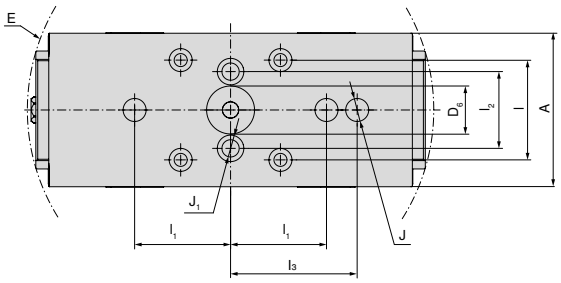

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	$l_{3\ \pm0,015}$ mm	J_{H7} mm	J_1 mm
80	25	213	52	50	40	66	12	9

Base width 125 mm and length 160 mm

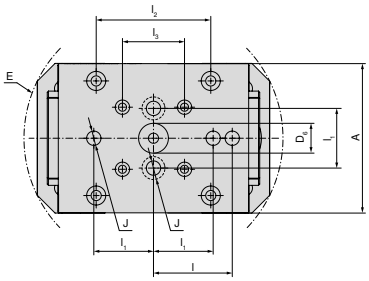

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	$l_{3\ \pm0,015}$ mm	J_{H7} mm
125	25	218	66	50	96	52	12

Base width 125 mm and length 235 mm

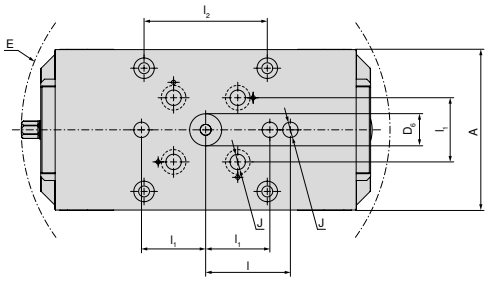

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm
125	25	288	66	50	96	12

Base width 125 mm and length 300 mm

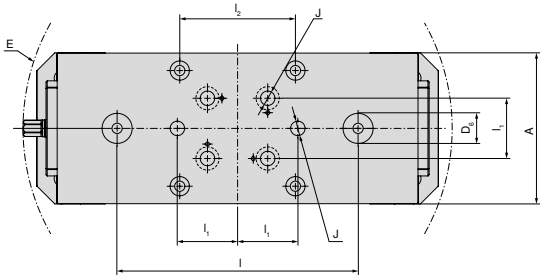

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm
125	25	357	200	50	96	12

ESG 5 underside dimensions

Base width 160 mm and length 280 mm

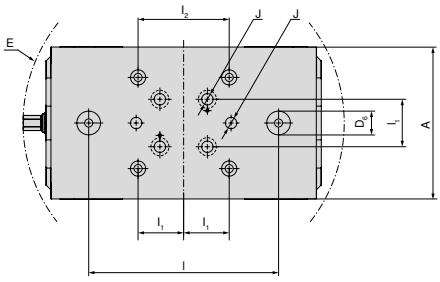

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm
160	25	339	200	50	96	12

Base width 160 mm and length 480 mm

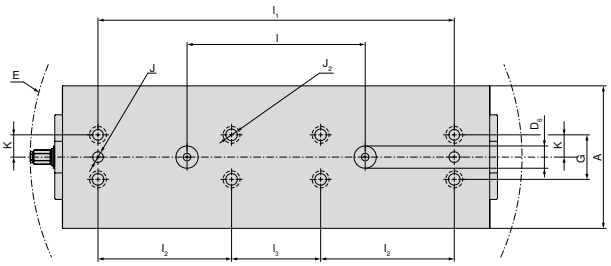

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	$l_{3\ \pm0,015}$ mm	J_{H7} mm	$J_{2\ F7}$ mm	$K_{\pm0,02}$ mm	G mm
160	25	553	200	400	150	100	12	12	25	50

ESG 5 structural dimension table for the different jaws

With indexable jaw grip 3 mm, fixed and movable

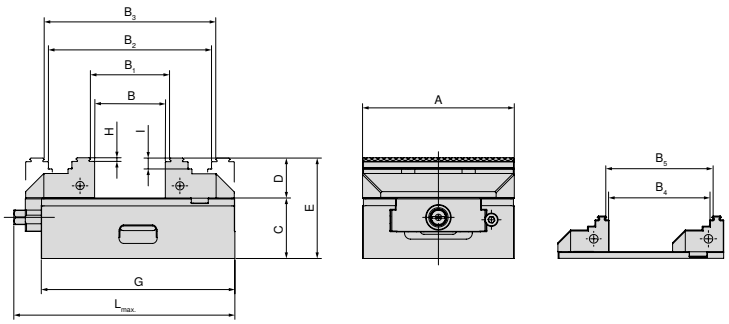

A mm	B mm	B_1 mm	B_2 mm	B_3 mm	B_4 mm	B_5 mm	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
80	0-49	4-53	59-107	63-111	30-78	34-82	50	28	78	130	3	8	155	**80 901 306** + **80 878 810**
80	0-109	4-113	59-167	63-171	29-134	35-136	50	28	78	190	3	8	206	**80 901 306** + **80 878 810**
125	0-57	8-64	77-134	84-141	40-95	47-102	50	33	83	160	3	9	183	**80 857 30000** + **80 878 510**
125	0-127	8-134	77-204	84-211	40-165	47-172	50	33	83	235	3	9	250	**80 857 30000** + **80 878 510**
125	0-197	8-204	77-274	84-281	40-235	47-242	50	33	83	300	3	9	320	**80 857 30000** + **80 878 510**
160	0-121	8-128	118-238	125-245	–	–	70	50	120	280	3	10	328	**80 901 300** + **80 878 610**
160	0-324	8-331	118-441	125-448	–	–	70	50	120	480	3	10	506	**80 901 300** + **80 878 610**

With 5-axis jaws

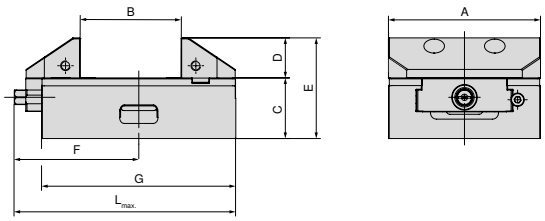

A mm	B mm	C mm	D mm	E mm	F mm	G mm	$L_{max.}$ mm	Article no. System jaws
125	25-82	50	33	83	103	160	183	**80 857 30200** + **80 857 30100**
125	25-152	50	33	83	132	235	250	**80 857 30200** + **80 857 30100**
125	25-222	50	33	83	170	300	320	**80 857 30200** + **80 857 30100**

System jaws overview

Indexable jaw, smooth, fixed

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	20			40			195,00	**80 857 30400**					●						
125	125		33	25			57			378,00	**80 857 30300**					●						

Indexable jaw, smooth, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	20			40			195,00	**80 878 34700**					●		●				
125	125		33	25			57			378,00	**80 878 34600**					●		●				

Indexable jaw, grip 3 mm, fixed

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			163,00	**80 901 306**				●	●						
125	125		33	30			57			222,00	**80 857 30000**					●						
160	160		50	47			81			404,00	**80 901 300**				●	●						

Indexable jaw, grip 3 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			135,00	**80 878 810**				●	●		●		●		
125	125		33	30			57			151,00	**80 878 510**					●		●				
160	160		50	47			81			404,00	**80 878 610**				●	●		●				

System jaws overview

5-axis indexable jaw, fixed

▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		33				44,5			224,00	**80 857 30100**					●						

5-axis indexable jaw, movable

▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		33				44,5			224,00	**80 857 30200**					●						

Soft jaw, steel, fixed

▲ Material: 16MnCr5
▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			104,00	**80 901 31800**				●	●						
125	125		40				68			125,00	**80 901 31900**				●	●						

Soft jaw, steel, movable

▲ Material: 16MnCr5
▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			89,10	**80 878 32000**				●	●		●				
125	125		40				68			112,00	**80 878 32100**				●	●		●				

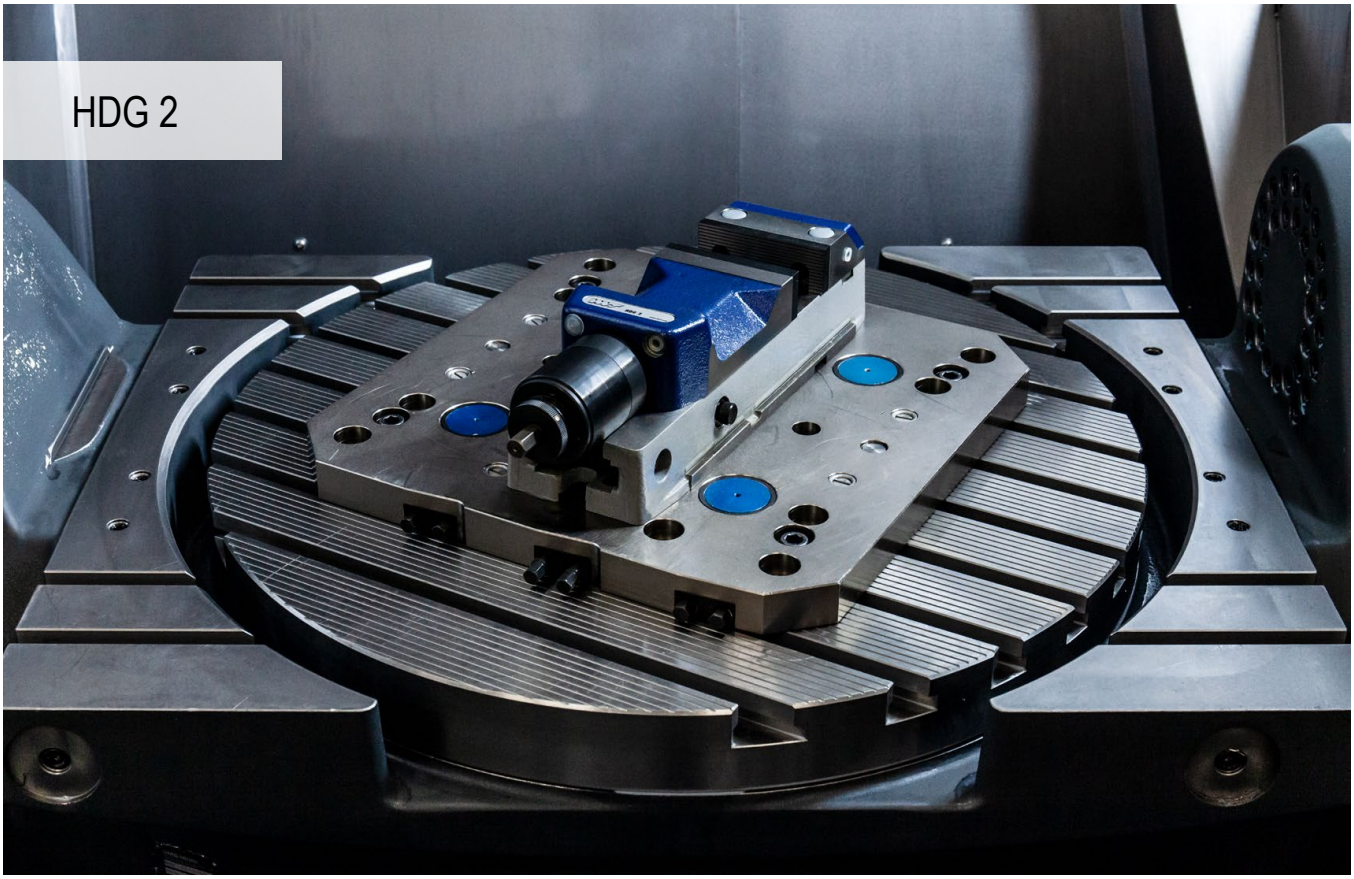

Tried-and-tested high pressure clamping system

Mechanical machine vice with continuous force adjustment from 10% to 100% of the clamping force with just one crank turn and always the same final crank position. Quick clamping range adjustment via locking pins.

Your benefits:

- ▲ Save time and effort – just one crank turn
- ▲ Clamping time of less than one second
- ▲ Easy handling
- ▲ Can be continuously adjusted without tools
- ▲ High machining precision

Clamping/aligning:

Alignment through precision slot nuts on the slot table with 20^{H7} longitudinal/transverse slot in the base body

Clamp with screws through the base body or laterally with clamping claws

SoloClamp – HDG 2

- ▲ high pressure vice
- ▲ stepless power adjustment
- ▲ mechanical power transmission
- ▲ clamping force with only a single turn of the handle
- ▲ flexible Jaws, pre-machined to accommodate jaws for clamping range extension

Scope of supply:

High pressure vice incl. 4 clamping jaws, hand crank, 2 top jaws profiled and hardened

HDG 2

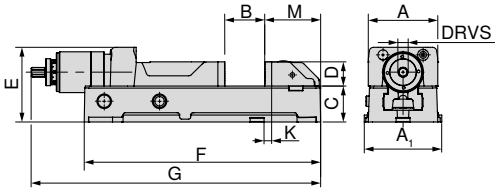

A	A1	B	C +0/-0,02	D	E	F	Gmax.	K ±0,015	M	DRVS	MXC	WT	80 892 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg		
100	112	0 - 159	52	35	108	342	521	11	81	12	4 - 30	20	2.050,00	**100**
125	140	0 - 201	62	40	118	400	584	28	85	12	4 - 40	27	2.340,00	**125**
160	176	0 - 300	78	50	149	544	784	40	112	12	5 - 60	55	3.470,00	**160**

Vice guide

Underside Dimensions	71	System accessories	69–71
General accessories	164–183		

System jaws overview

Jaws for clamping range extension

▲ Price per set (1 fixed and 1 movable jaw)



For vice width	A	A1	D	D1	D2	E	M	M1	M2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		56	50	22		37	5	19	366,00	**80 892 225**						●					
	125		56	50	22		37	5	19	494,00	**80 892 226**						●					
	160		71	65	23		47	5	23,5	537,00	**80 892 227**						●					

Illustration with extended clamping range

A	B	D	Vice Article Number	Jaw Article Number
100	118 - 278	56	**80 892 100**	**80 892 225**
125	137 - 338	56	**80 892 125**	**80 892 226**
160	169 - 470	71	**80 892 160**	**80 892 227**

SoloClamp – HDG 2

▲ Base body extension

HDG 2

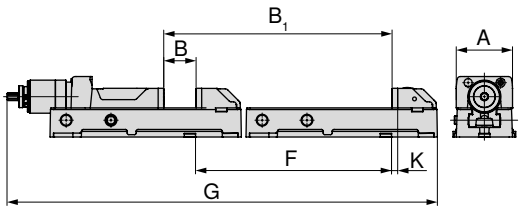

A mm	B mm	B_1 mm	F mm	G mm	K mm	80 892 ... EUR Y4	
100	0-159	350-509	450	871,3	11	1.160,00	**51000**
125	0-201	410-611	410	994,1	28	1.280,00	**51100**
160	0-300	550-850	550	1334,15	40	1.740,00	**51200**

Shown with base body extension

A	B	D	Vice Article Number	Extension article number
100	350 - 509	35	**80 892 100**	**80 892 51000**
125	410 - 611	40	**80 892 125**	**80 892 51100**
160	550 - 850	50	**80 892 160**	**80 892 51200**

HDG 2 underside dimensions

Base width 100 mm, 125 mm, 160 mm

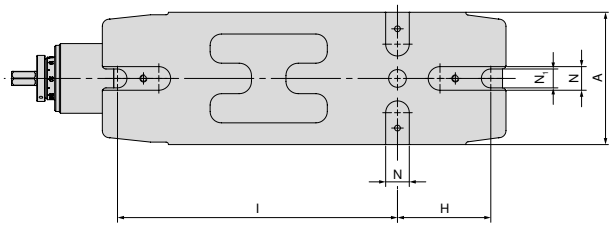

A mm	H mm	I mm	N_{H7} mm	N_1 mm
100	80	240	20	15
125	100	280	20	18
160	130	380	20	22

System accessories overview

Angular drive

HDG 2

for width mm		80 892 ... EUR Y4	
100/125		460,00	**314**
160		499,00	**315**

Hand crank

▲ for fast adjustment

HDG 2

for width mm	DRVS mm	80 892 ... EUR Y4	
100/125	12	76,60	**124**
160	12	95,00	**164**

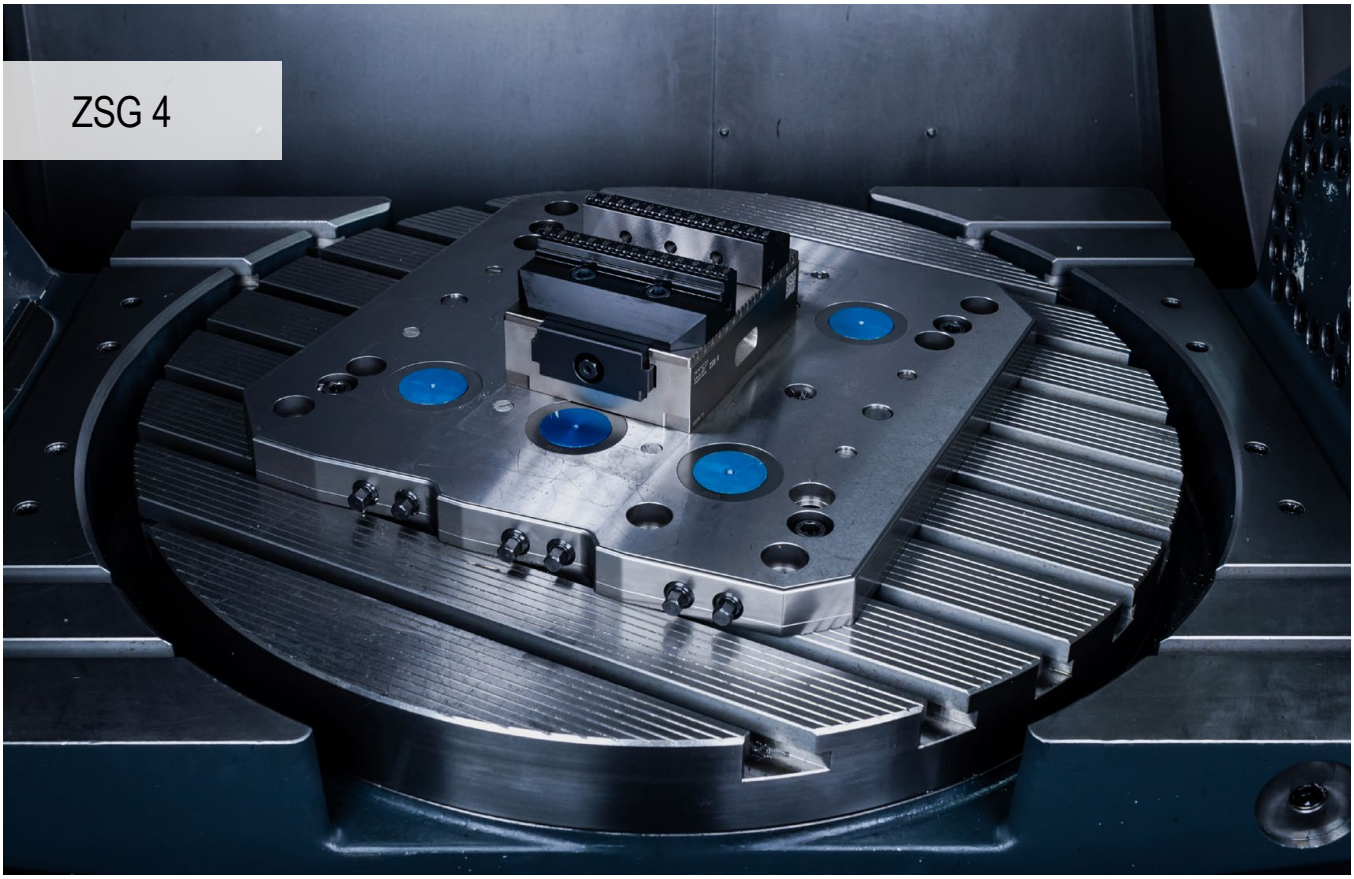

The optimised ZSG 4 – Maximum precision and process security

The new ZSG 4 retains all the cherished characteristics of its predecessor and raises the bar significantly with regard to user-friendliness and durability. Optimised handling and improved durability were top of the list in the update for the popular centric vice.

Your benefits:

- ▲ Specially designed for second side machining through high angular accuracy
- ▲ Compact design with ideal accessibility
- ▲ Jaw change Quick and easy with two screws
- ▲ The same clamping ranges, significantly improved interference contour, comprehensive modular jaw range
- ▲ Sustainable model with nickel-plated base body ensures a long service life

Clamping/aligning:

Mounting with zero point clamping system
ZSG 4 – 80 mm L-130 mm + L-190 mm
ZSG 4 – 125 mm L-160 mm + L-235 mm

1 mounting bolt + MNG-indexing bolt

Mounting with zero point clamping system
ZSG 4 – 125 mm + L-300 mm
ZSG 4 – 160 mm + L-280 mm + L-480 mm

2 mounting bolts

Dia. 12^{JS} precision holes are present in all variants for positioning the ZSG 4 with precision. All variants can be mounted with screws from above through the base body.

Clamping/aligning:

ZSG 4 – 125 mm L-235 mm + L-300 mm
ZSG 4 – 160 mm L-280 mm + L-480 mm

These 4 variants can also be clamped with clamping claws as an alternative.

ZSG 4 – 80 mm L-130 mm + L-190 mm
ZSG 4 – 125 mm L-160 mm + L-235 mm + L-300 mm
ZSG 4 – 160 mm L-280 mm

All 5 variants are also available with mounting holes for the LANG zero point clamping system.

Clamping force:

ZSG 4 – 80 mm tightening torque/clamping force

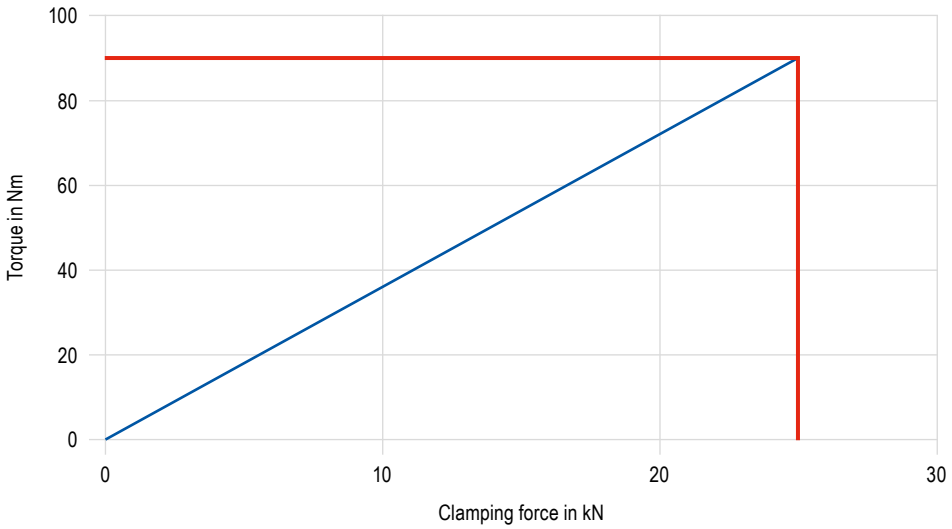

17

Clamping force:

ZSG 4 – 125 mm tightening torque / clamping force

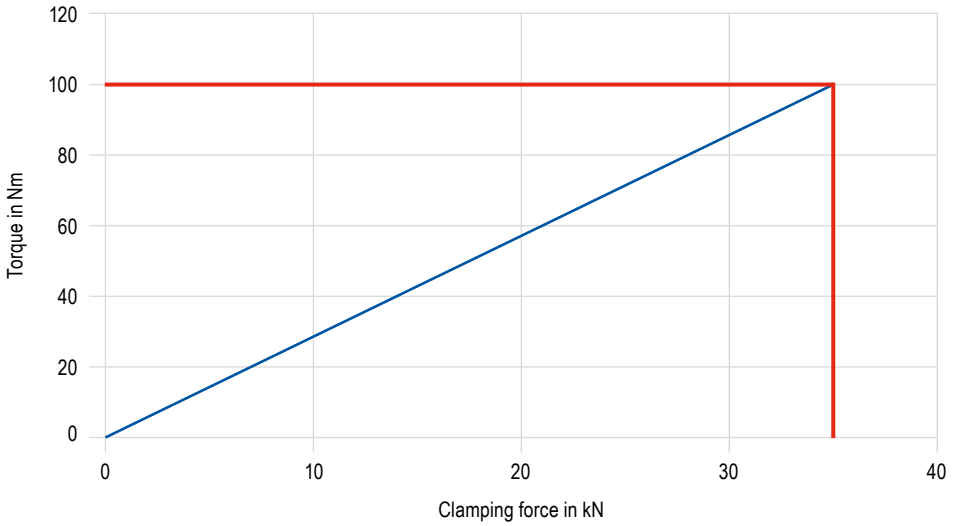

ZSG 4 – 160 mm tightening torque / clamping force

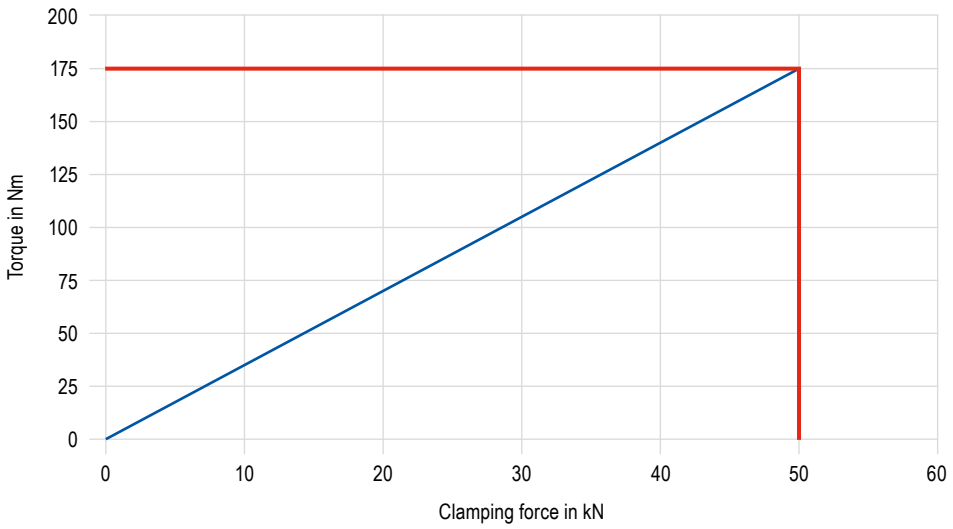

CentriClamp – ZSG 4

- ▲ Sealed centric vice
- ▲ Without system jaws
- ▲ Ball bearing mounted spindle
- ▲ ±0.01 mm repeatability between the clamping processes
- ▲ Suitable for PNG and MNG

ZSG 4 | **MNG**

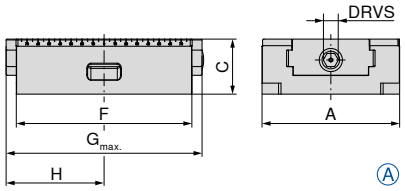

Internal actuating spindle

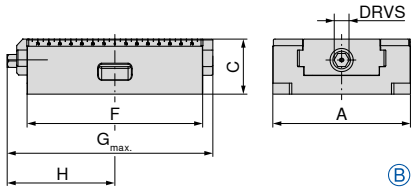

External actuating spindle

A mm	C ±0,01 mm	F mm	$G_{max.}$ mm	H mm	DRVS mm	MXC kN	WT kg	Designation	80 878 ... EUR Y4	
80	50	130	157	81	12	25	3,1	A	553,00	**08500**
80	50	190	206	104	12	25	4,5	B	665,00	**08600**
125	50	160	200	111,5	12	35	6,3	A	726,00	**15000**
125	50	235	272	143,5	12	35	9,5	B	927,00	**15100**
125	50	300	340	181	12	35	12,5	B	1.130,00	**15200**
160	70	280	315	172	14	50	25,0	A	1.710,00	**26100**
160	70	480	524	276	14	50	35,0	B	3.230,00	**26200**

Suitable for zero point clamping system							LANG Quick Point	LANG Quick Point
Article no.	Type	Width in mm	Length in mm	MNG	MNG mini	PNG	96 x 96	52 x 52
80 878 08500	ZSG 4	80	130	✓	✓	✗	✗	✓
80 878 08600		80	190	✓	✗	✓	✗	✓
80 878 15000		125	160	✓	✗	✓	✓	✓
80 878 15100		125	235	✓	✗	✓	✓	✗
80 878 15200		125	300	✓	✗	✓	✓	✗
80 878 26100		160	280	✓	✗	✓	✓	✗
80 878 26200		160	480	✓	✗	✓	✗	✗

Vice guide

Underside Dimensions	78+79	Structural dimension tables for the different jaws	80–83
System accessories	85–90	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

CentriClamp – ZSG 4

- ▲ Sealed centric vice
- ▲ With grip jaws, 3 mm
- ▲ Ball bearing mounted spindle
- ▲ ±0.01 mm repeatability between the clamping processes
- ▲ Suitable for PNG and MNG

ZSG 4 | **MNG**

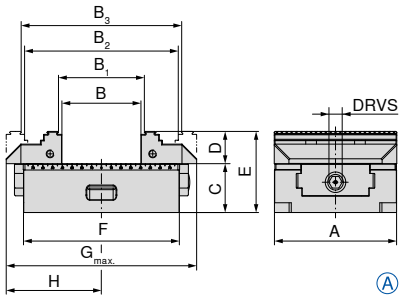

Internal actuating spindle

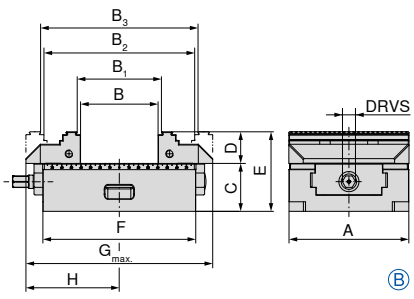

External actuating spindle

80 878 ...

A mm	B mm	B_1 mm	B_2 mm	B_3 mm	C ±0,01 mm	D mm	E mm	F mm	$G_{max.}$ mm	H mm	DRVS mm	MXC kN	WT kg	Designation	EUR Y4	
80	0 - 59	4 - 63	59 - 117	63 - 121	50	28	78	130	157	81	12	25	3,9	A	777,00	**08700**
80	0 - 123	4 - 127	59 - 181	63 - 185	50	28	78	190	206	104	12	25	5,5	B	889,00	**08800**
125	0 - 80	8 - 87	77 - 156	84 - 163	50	33	83	160	208	111,5	12	35	8,7	A	980,00	**15300**
125	0 - 155	8 - 162	77 - 218	84 - 225	50	33	83	235	272	143,5	12	35	12,0	B	1.180,00	**15400**
125	0 - 220	8 - 227	77 - 296	84 - 303	50	33	83	300	348	181	12	35	14,0	B	1.390,00	**15500**

It is not possible to fit top jaws with a height of 40 mm, if this height is required, please use the reversible jaws with D = 40 mm (Article No. **80 878 520**).

Article no.	Suitable for zero point clamping system: Type	Width in mm	Length in mm	MNG	MNG mini	PNG	LANG Quick Point 96 x 96	LANG Quick Point 52 x 52
80 878 08700	ZSG 4	80	130	✓	✓	✗	✗	✓
80 878 08800		80	190	✓	✗	✓	✗	✓
80 878 15300		125	160	✓	✗	✓	✓	✓
80 878 15400		125	235	✓	✗	✓	✓	✗
80 878 15500		125	300	✓	✗	✓	✓	✗

Vice guide

Underside Dimensions	78+79	Structural dimension tables for the different jaws	80–83
System accessories	85–90	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

CentriClamp – ZSG 4

- ▲ Sealed centric vice for Erowa ITS 148
- ▲ Without system jaws
- ▲ Ball bearing mounted spindle
- ▲ ±0.01 mm repeatability between the clamping processes

ZSG 4 | **MNG**

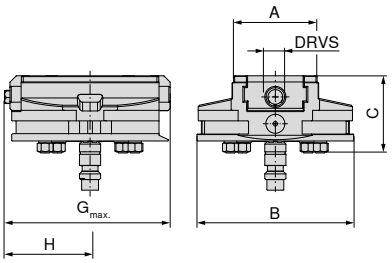

A	B	C	$G_{max.}$	H	DRVS	MXC	WT	80 878 ...	
mm	mm	mm	mm	mm	mm	kN	kg	EUR	
								Y4	
80	148	73	157	81	12	25	5,6	1.370,00	**08900**

Vice guide

Underside Dimensions	78+79	Structural dimension tables for the different jaws	80–83
System accessories	85–90	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

17

ZSG 4 underside dimensions

Base width 80 mm and length 130 mm

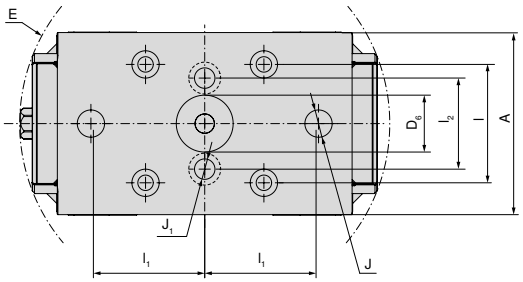

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm	J_1 mm
80	25	163	52	50	40	12	9

Base width 80 mm and length 190 mm

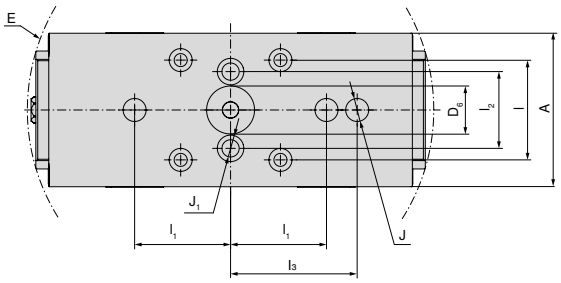

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	$l_{3\ \pm0,015}$ mm	J_{H7} mm	J_1 mm
80	25	213	52	50	40	66	12	9

Base width 125 mm and length 160 mm

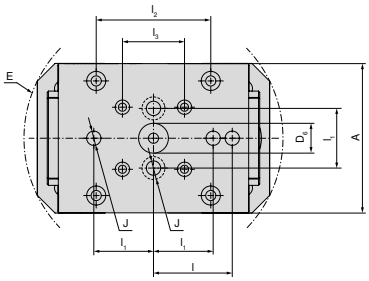

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	$l_{3\ \pm0,015}$ mm	J_{H7} mm
125	25	218	66	50	96	52	12

Base width 125 mm and length 235 mm

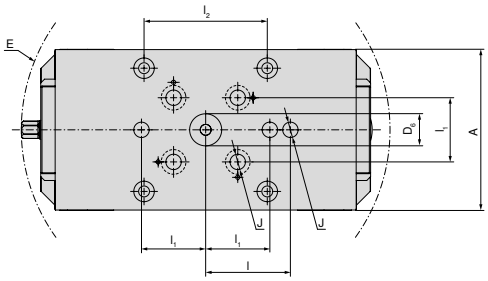

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm
125	25	288	66	50	96	12

Base width 125 mm and length 300 mm

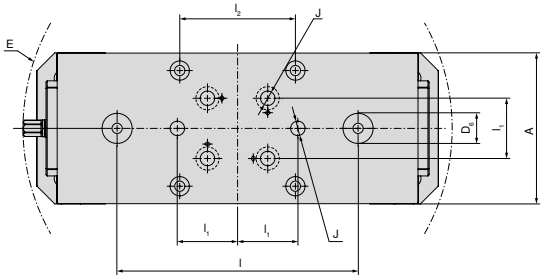

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm
125	25	357	200	50	96	12

ZSG 4 underside dimensions

Base width 160 mm and length 280 mm

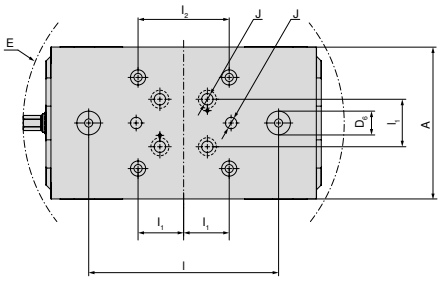

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	J_{H7} mm
160	25	339	200	50	96	12

Base width 160 mm and length 480 mm

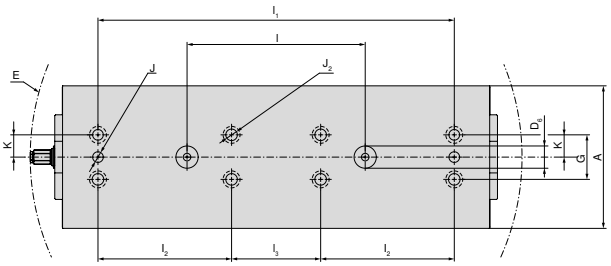

A mm	$D_{6\ H6}$ mm	E mm	$l_{\pm0,015}$ mm	$l_{1\ \pm0,015}$ mm	l_2 mm	$l_{3\ \pm0,015}$ mm	J_{H7} mm	$J_{2\ F7}$ mm	$K_{\pm0,02}$ mm	G mm
160	25	553	200	400	150	100	12	12	25	50

ZSG 4 structural dimension table for the different jaws

With combi jaws

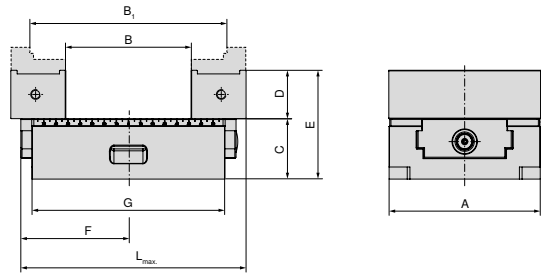

A mm	B mm	B1 mm	C mm	D mm	E mm	F mm	G mm	Lmax. mm	Article no. System jaws
125	23 - 103	82 - 161	50	40	90	111,5	160	208	2 x **80 878 530**
125	23 - 165	82 - 223	50	40	90	143,5	235	272	2 x **80 878 530**
125	23 - 241	82 - 300	50	40	90	181	300	348	2 x **80 878 530**

With pendulum and adapter plate

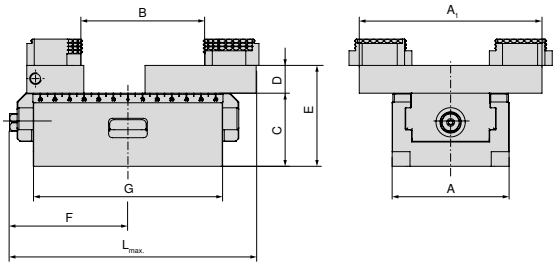

A mm	A1 mm	B mm	C mm	D mm	E mm	F mm	G mm	Lmax. mm	Article no. System jaws
80	125	3 - 84	50	28	78	81	130	157	**80 878 890** + **80 878 870**
80	125	3 - 145	50	28	78	104	190	206	**80 878 890** + **80 878 870**
125	180	7 - 126	50	22	90	111,5	160	212	**80 878 590** + **80 878 570**
125	180	7 - 207	50	22	90	143,5	235	272	**80 878 590** + **80 878 570**
125	180	7 - 250	50	22	90	181	300	352	**80 878 590** + **80 878 570**
160	256	16 - 292	70	22	110	170	280	315	**80 878 690** + **80 878 670**
160	256	16 - 406	70	22	110	276	480	524	**80 878 690** + **80 878 670**

With aluminium jaws

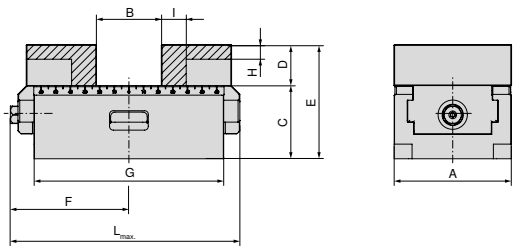

A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Lmax. mm	Article no. System jaws
80	0 - 44	50	28	78	81	130	10	17	157	2 x **80 878 850**
80	0 - 108	50	28	78	104	190	10	17	206	2 x **80 878 850**
125	0 - 58	50	40	90	111,5	160	17	27	208	2 x **80 878 550**
125	0 - 133	50	40	90	143,5	235	17	27	272	2 x **80 878 550**
125	0 - 198	50	40	90	181	300	17	27	348	2 x **80 878 550**
160	0 - 123	70	50	120	170	280	26	25	315	2 x **80 878 305**
160	10 - 336	70	50	120	276	480	26	25	524	2 x **80 878 305**

ZSG 4 structural dimension table for the different jaws

With 5-axis jaws

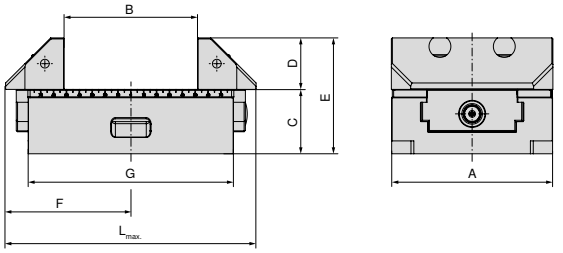

A mm	B mm	C mm	D mm	E mm	F mm	G mm	$L_{max.}$ mm	Article no. System jaws
125	22 - 102	50	40	90	115,5	160	208	2 x **80 878 625**
125	22 - 165	50	40	90	143,5	235	272	2 x **80 878 625**
125	22 - 242	50	40	90	181	300	348	2 x **80 878 625**
160	15 - 140	70	50	120	170	280	315	2 x **80 878 660**
160	28 - 354	70	50	120	276	480	524	2 x **80 878 660**

With 5 axis jaws, grip 3 mm, width 65 mm

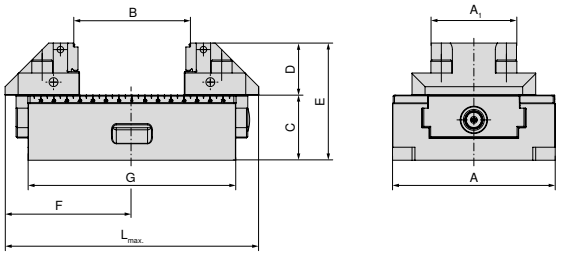

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	$L_{max.}$ mm	Article no. System jaws
125	65	8 - 87	50	40	90	115,5	160	208	2 x **80 878 665**
125	65	8 - 162	50	40	90	143,5	235	272	2 x **80 878 665**
125	65	8 - 227	50	40	90	181	300	348	2 x **80 878 665**

With indexable jaws, grip 3 mm, height 65 mm

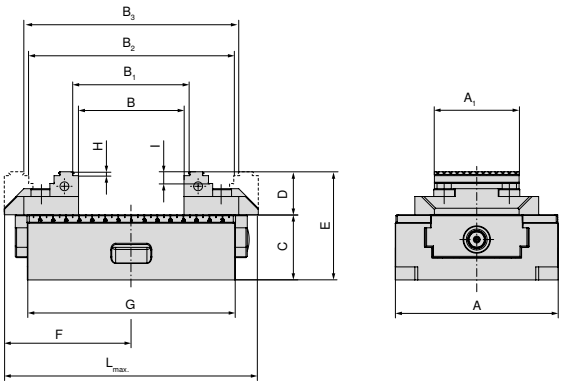

A mm	A_1 mm	B mm	B_1 mm	B_2 mm	B_3 mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
125	65	0 - 80	8 - 87	77 - 156	84 - 163	50	33	83	111,5	160	3	9	208	2 x **80 878 51900**
125	65	0 - 142	8 - 149	77 - 218	84 - 225	50	33	83	143,5	235	3	9	272	2 x **80 878 51900**
125	65	0 - 220	8 - 227	77 - 296	84 - 303	50	33	83	181	300	3	9	348	2 x **80 878 51900**

ZSG 4 structural dimension table for the different jaws

With indexable jaws, grip 3 mm

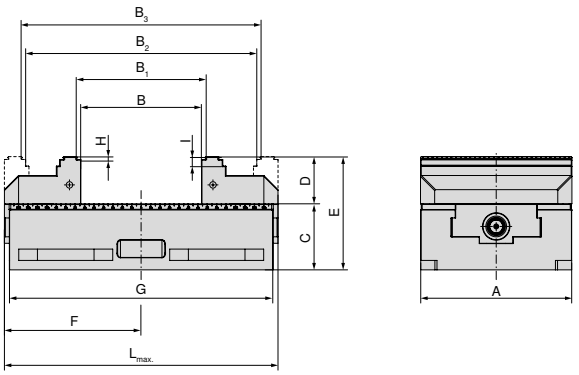

A mm	B mm	B_1 mm	B_2 mm	B_3 mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
160	0 - 127	8 - 134	118 - 244	125 - 251	70	50	120	170	280	3	10	315	2 x **80 878 610**
160	15 - 341	22 - 348	132 - 458	139 - 465	70	50	120	276	480	3	10	524	2 x **80 878 610**

With indexable jaws, grip, height 40 mm

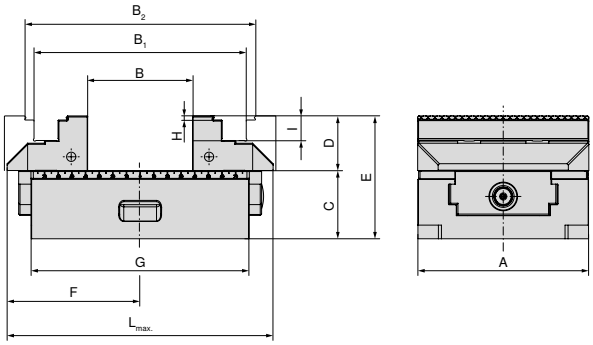

A mm	B mm	B_1 mm	B_2 mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
125	0 - 75	75 - 154	88 - 166	50	40	90	111,5	160	3	9	208	2 x **80 878 520**
125	0 - 138	75 - 217	88 - 229	50	40	90	143,5	235	3	9	272	2 x **80 878 520**
125	0 - 215	75 - 294	88 - 306	50	40	90	181	300	3	9	348	2 x **80 878 520**

With 6 face jaw system for 125 mm jaw width

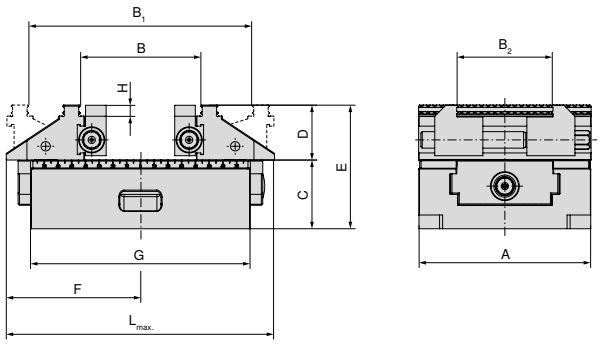

A mm	B mm	B_1 mm	B_2 mm	C mm	D mm	E mm	F mm	G mm	H mm	$L_{max.}$ mm	Article no. System jaws
125	39 - 86	83 - 161	37 - 101	50	40	90	111,5	160	8	209	**80 878 525**
125	39 - 149	83 - 224	37 - 101	50	40	90	143,5	235	8	272	**80 878 525**
125	39 - 226	83 - 301	37 - 101	50	40	90	181	300	8	349	**80 878 525**

ZSG 4 structural dimension table for the different jaws

With middle jaw, grip 3 mm (height 28 mm / 33 mm) for jaw width 125 mm

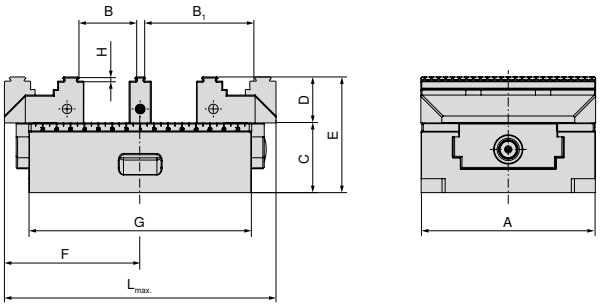

A mm	B mm	B1 mm	C mm	D mm	E mm	F mm	G mm	H mm	Lmax. mm	Article no. System jaws
80	8 - 28	37 - 57	50	28	78	81	130	3	157	2 x **80 878 810** + **80 878 31200**
80	14 - 22	31 - 51	50	28	78	81	130	3	157	2 x **80 878 810** + **80 878 33400**
80	8 - 58	37 - 87	50	28	78	104	190	3	206	2 x **80 878 810** + **80 878 31200**
80	14 - 52	31 - 81	50	28	78	104	190	3	206	2 x **80 878 810** + **80 878 33400**
125	9 - 40	47 - 78	50	33	83	111,5	160	3	208	2 x **80 878 510** + **80 878 31300**
125	15 - 34	41 - 72	50	33	83	111,5	160	3	208	2 x **80 878 510** + **80 878 33500**
125	9 - 72	47 - 110	50	33	83	143,5	235	3	272	2 x **80 878 510** + **80 878 31300**
125	15 - 66	41 - 104	50	33	83	143,5	235	3	272	2 x **80 878 510** + **80 878 33500**
125	9 - 110	47 - 148	50	33	83	181	300	3	348	2 x **80 878 510** + **80 878 31300**
125	15 - 104	41 - 142	50	33	83	181	300	3	348	2 x **80 878 510** + **80 878 33500**

With prism jaw, movable – horizontal and vertical prism

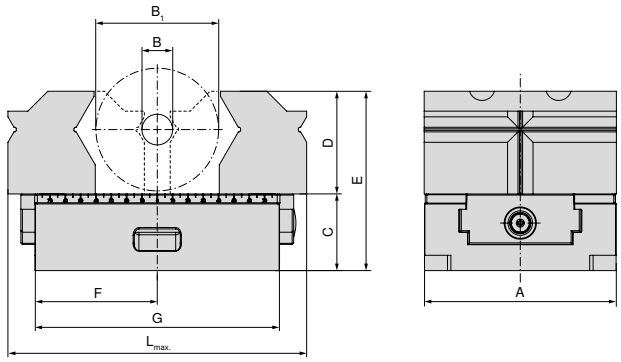

A mm	B mm	B1 mm	C mm	D mm	E mm	F mm	G mm	Lmax. mm	Article no. System jaws
80	10 - 28	20 - 60	50	52	102	81	130	157	2 x **80 878 31800**
80	10 - 28	20 - 60	50	52	102	104	190	206	2 x **80 878 31800**
125	10 - 28	26 - 80	50	67	117	111,5	160	200	2 x **80 878 31900**
125	10 - 28	26 - 80	50	67	117	143,5	235	272	2 x **80 878 31900**
125	10 - 28	26 - 80	50	67	117	181	300	348	2 x **80 878 31900**

ZSG 4 structural dimension table for the different jaws

With prism jaw, movable – horizontal prism

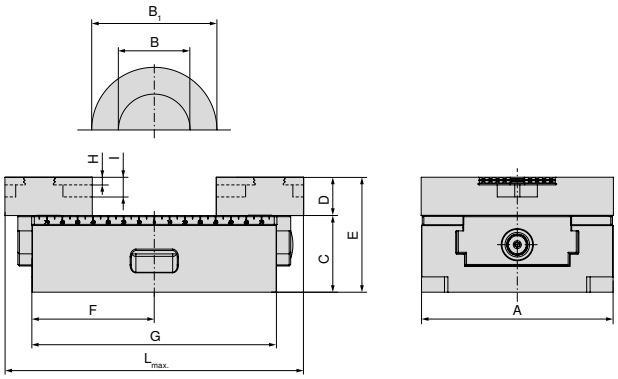

A mm	B mm	B1 mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Lmax. mm	Article no. System jaws
80	8 - 55	15 - 76	50	25	75	81	130	5	13	157	2 x **80 878 34000**
80	8 - 55	15 - 76	50	25	75	104	190	5	13	206	2 x **80 878 34000**
125	14 - 102	25 - 112	50	25	75	111,5	160	5	13	200	2 x **80 878 34100**
125	14 - 124	25 - 165	50	25	75	143,5	235	5	13	272	2 x **80 878 34100**
125	14 - 124	25 - 165	50	25	75	181	300	5	13	348	2 x **80 878 34100**
160	22 - 158	32 - 170	70	30	100	145	280	5	13	290	2 x **80 878 34200**
160	22 - 158	32 - 170	70	30	100	273	480	5	13	521	2 x **80 878 34200**

System jaws overview

5-axis jaw, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40				45,5			225,00	**80 878 625**							●				
160	160		50				73			277,00	**80 878 660**							●				

5-axis jaw, grip 3 mm, width 65 mm, movable

▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	95	65,5	40				57			260,00	**80 878 665**							●				

5-axis indexable jaw, grip 3 mm, width 65 mm, movable

▲ double sided grip step
▲ price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	95	65	33	30			57			196,00	**80 878 51900**							●				

Indexable grip jaw 3 mm, width 40 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80	40	28	25			40			180,00	**80 878 81900**				●			●				

Indexable jaw, grip 3 mm, height 40 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40	37			59			282,00	**80 878 520**							●				

17

System jaws overview

Indexable jaw, grip 3 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			135,00	**80 878 810**				●	●		●		●		
125	125		33	30			57			151,00	**80 878 510**					●		●				
160	160		50	47			81			404,00	**80 878 610**				●	●		●				

Indexable jaw, grip 5 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	23			41			160,00	**80 878 81400**				●			●		●		
125	125		33	28			57			177,00	**80 878 51400**							●				
160	160		50	45			81			404,00	**80 878 34300**				●			●				

Indexable grip jaw, for aluminium and plastic

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	23			40			191,00	**80 878 81500**							●				
125	125		33	28			57			210,00	**80 878 51500**							●				

Indexable jaw with embossed profile, movable

▲ Price per piece
▲ suitable for LANG embossed profile



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			170,00	**80 878 81800**							●				
125	125		33	30			57			233,00	**80 878 51800**							●				

System jaws overview

Indexable jaw, carbide, grip 3 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			242,00	**80 878 81600**							●				
125	125		33	30			57			342,00	**80 878 51600**							●				
160	160		50	47			81			537,00	**80 878 31700**							●				

Indexable jaw, carbide, grip 5 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	23			40			242,00	**80 878 81700**							●				
125	125		33	28			57			342,00	**80 878 51700**							●				

Indexable jaw, carbide grip 3 mm, width 40 mm, movable

▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80	40	28	25			40			234,00	**80 878 33200**							●				

Indexable jaw, carbide grip 3 mm, width 65 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125	65	33	30			57			324,00	**80 878 33300**							●				

Indexable jaw, smooth, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	20			40			195,00	**80 878 34700**					●		●				
125	125		33	25			57			378,00	**80 878 34600**					●		●				

17

System jaws overview

Stepped jaw, smooth, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	24			40			247,00	**80 878 34400**							●				
125	125		33	27			57			347,00	**80 878 34500**							●				

Centre jaw, grip 3 mm, narrow

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			16			110,00	**80 878 31200**							●				
125	125		33	30			16			155,00	**80 878 31300**							●				

Centre jaw, grip 3 mm, wide

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			24			110,00	**80 878 33400**							●				
125	125		33	30			26			155,00	**80 878 33500**							●				

Prism jaw, movable

▲ With horizontal and vertical prism
▲ Price per piece





Ø For clamping diameter	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
10 - 60	80		52	32			38,5			319,00	**80 878 31800**							●				
10 - 80	125		67	42			57			486,00	**80 878 31900**							●				

System jaws overview

Prism jaw, movable

▲ With horizontal prism
▲ Price per piece




Ø For clamping diameter	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
15 - 75	80		25	20			40			171,00	**80 878 34000**							●				
25 - 110	125		25	20			57			220,00	**80 878 34100**							●				
30 - 170	160		30	25			81			285,00	**80 878 34200**							●				

Combi jaw, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40				45,5			173,00	**80 878 530**							●				

Jaw, grip, VS

▲ Price per piece
▲ VS = Larger clamping range



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		22	17			45			99,30	**80 892 245**							●				

Jaw, smooth VS, carbide coated

▲ Increased clamping range for finish machining and 2nd operation
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		19	14			45			239,00	**80 892 240**							●				

Alu jaw, movable

▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			86,40	**80 878 850**				●	●		●		●		
125	125		40				68			98,30	**80 878 550**				●					●		
160	160		50				85			124,00	**80 878 305**				●	●		●				

System jaws overview

Soft jaw, steel, movable

▲ Material: 16MnCr5
▲ for producing shaped jaws
▲ Price per piece





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			89,10	**80 878 32000**				●	●		●				
125	125		40				68			112,00	**80 878 32100**				●	●		●				

Pendulum jaw, movable

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	125		19				76			409,00	**80 878 870**				●			●		●		
125	180		22				95			426,00	**80 878 570**				●			●		●		
160	256		22				170			726,00	**80 878 670**				●			●				

Adapter Jaw

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	125		19				39			290,00	**80 878 890**							●				
125	180		22				62			346,00	**80 878 590**							●				
160	256		22				125			484,00	**80 878 690**							●				

6 function indexable jaw

▲ 1 = Smooth, carbide coated
▲ 2 = Grip with 3 mm step
▲ 3 = Grip with 8 mm step
▲ 4 = Grip with 18 mm step
▲ 5 = Rough grip with 8 mm step
▲ 6 = Round grip
▲ M_{max} = 60 Nm
▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

System jaws overview

6x indexable jaw, carbide grip

- ▲ 1 = Smooth
- ▲ 2 = Carbide grip
- ▲ 3 = Carbide grip with 3 mm step
- ▲ 4 = Carbide grip with 8 mm step
- ▲ 5 = Round carbide grip with 8 mm step
- ▲ 6 = Round carbide grip
- ▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

6 face jaw system for 125 mm jaw width

Scope of supply:

2 System jaws with 2 pairs of transverse jaws in T-slot guidance incl. fixing screws

ZSG 4

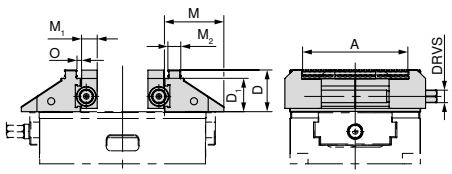

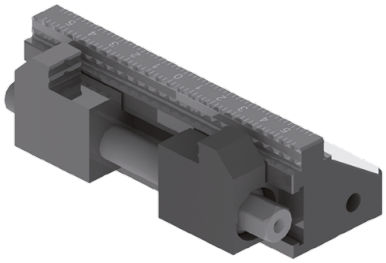

for width	A	D	D_1	M	M_1	M_2	O	DRVS	WT	80 878 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	mm	mm	kg		
125	37 - 101	40	32	57	15	12,4	3,3	12	3,8	1.720,00	**525**

Centric vice for small parts

ZSG mini in mechanical version with high clamping force and quick change jaws. Ideal for blank and finished part machining, multi-clamping and automation.

Your benefits:

- ▲ Fast jaw changeover without tools
- ▲ Compact and precise
- ▲ Optimum accessibility from all sides
- ▲ Exchangeable jaw widths (45 mm and 70 mm)
- ▲ High clamping force and large clamping range
- ▲ Clamping system for automation
- ▲ Stainless, hardened base body

Clamping/aligning:

Clamping with two M6 screws from above through the base body.

Clamping with two M6 screws from above through the base body. Alignment can be performed using Ø 12^{H7} precision holes.

Both versions come with mounting holes for the LANG zero point clamping system, Quick Point 52 x 52.

Clamping force:

ZSG mini tightening torque/clamping force

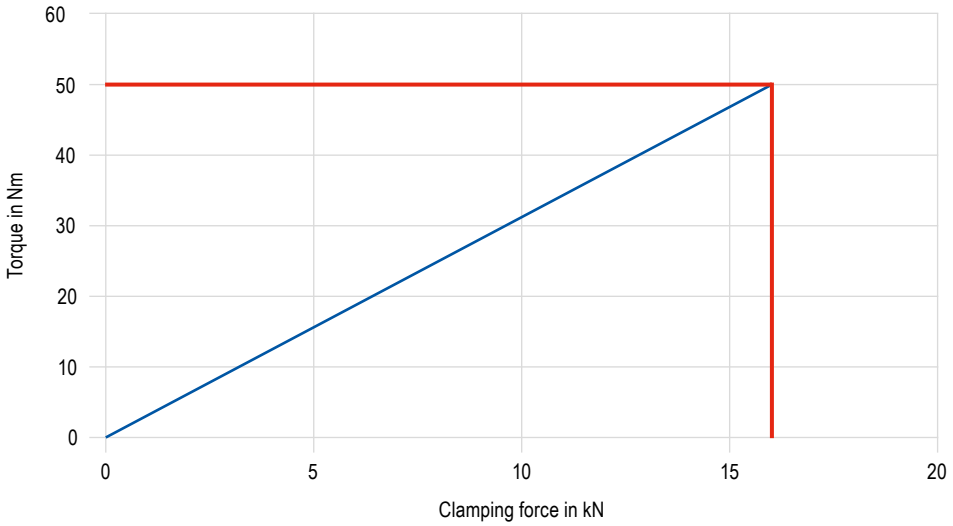

CentriClamp – ZSG mini

- ▲ Centric vice for small parts
- ▲ Without system jaws
- ▲ Fast jaw changeover without tools
- ▲ Compact and precise
- ▲ Optimum accessibility from all sides
- ▲ Exchangeable jaw widths (45 mm and 70 mm)
- ▲ Stainless, hardened base body

Scope of supply:

ZSG mini base body with spindle

ZSG mini | **MNG mini**

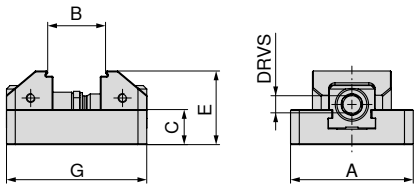

NEW

A mm	B mm	C mm	E mm	G mm	MXC kN	DRVS mm	WT kg	80 912 ... EUR Y4	
70	7 - 57	20	42	80	16	11	0,9	420,00	**07000**
70	7 - 77	20	42	100	16	11	1,1	476,00	**07100**

Vice guide

Underside Dimensions	94	Structural dimension tables for the different jaws	95–97
System accessories	98–100	MNG-/PNG zero point clamping system	134–163
General accessories	164–183		

ZSG mini underside dimensions

Base width 70 mm



A mm	J_1 mm	J H7 mm	l_2 ±0,01 mm	I ±0,01 mm	G mm
70	6,5	12	50	52	80
70	6,5	12	50	52	100

ZSG Mini – structural dimension table for the different jaws

With quick change jaw, grip 3 mm

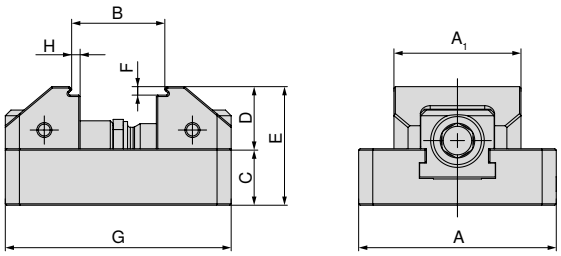

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	7 - 33	20	22	42	3	80	3	2 x **80 912 30100**
70	70	7 - 33	20	22	42	3	80	3	2 x **80 912 30200**
70	45	7 - 53	20	22	42	3	100	3	2 x **80 912 30100**
70	70	7 - 53	20	22	42	3	100	3	2 x **80 912 30200**

With quick change jaw, smooth step 5 mm

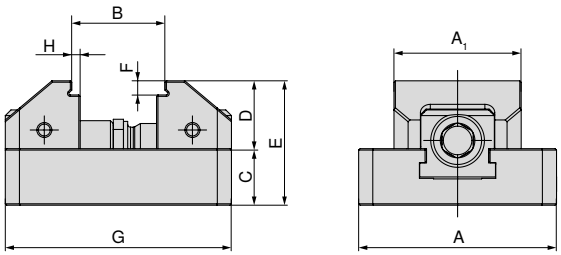

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	7 - 33	20	24	44	5	80	3	2 x **80 912 30300**
70	70	7 - 33	20	24	44	5	80	3	2 x **80 912 30400**
70	45	7 - 53	20	24	44	5	100	3	2 x **80 912 30300**
70	70	7 - 53	20	24	44	5	100	3	2 x **80 912 30400**

With quick change jaw, soft, steel

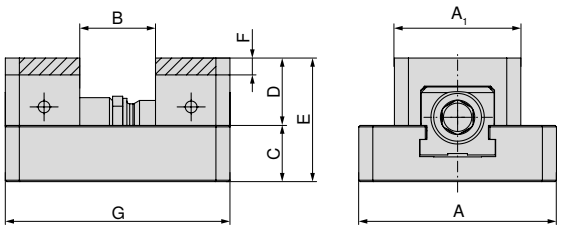

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	Article no. System jaws
70	45	0 - 26	20	24	44	6	80	2 x **80 912 31000**
70	70	0 - 26	20	24	44	6	80	2 x **80 912 31100**
70	45	0 - 46	20	24	44	6	80	2 x **80 912 31000**
70	70	0 - 46	20	24	44	6	80	2 x **80 912 31100**

ZSG Mini – structural dimension table for the different jaws

With quick change jaw embossed profile

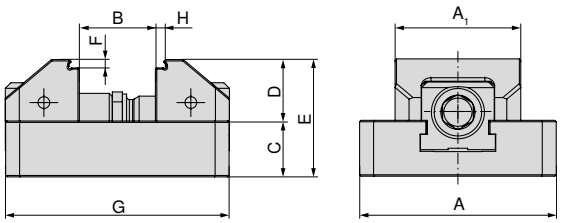

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	7 - 32	20	22	44	3	80	3	2 x **80 912 31200**
70	70	7 - 32	20	22	44	3	80	3	2 x **80 912 31300**
70	45	7 - 52	20	22	44	3	100	3	2 x **80 912 31200**
70	70	7 - 52	20	22	44	3	100	3	2 x **80 912 31300**

With quick change jaw embossed profile, VS

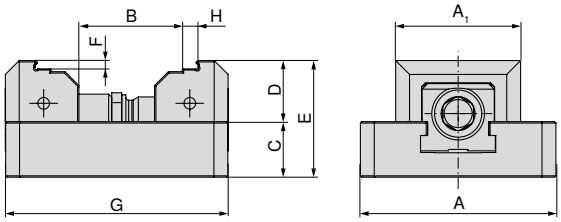

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	31 - 56	20	22	44	3	80	5	2 x **80 912 31400**
70	70	31 - 56	20	22	44	3	80	5	2 x **80 912 31500**
70	45	31 - 76	20	22	44	3	100	5	2 x **80 912 31400**
70	70	31 - 76	20	22	44	3	100	5	2 x **80 912 31500**

ZSG Mini – structural dimension table for the different jaws

With quick change jaw, VS, grip 3 mm

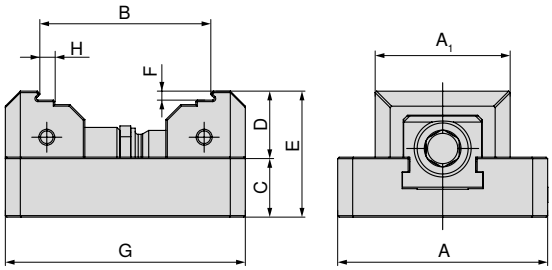

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	31 - 57	20	22	42	3	80	5	2 x **80 912 30500**
70	70	31 - 57	20	22	42	3	80	5	2 x **80 912 30600**
70	45	31 - 77	20	22	42	3	100	5	2 x **80 912 30500**
70	70	31 - 77	20	22	42	3	100	5	2 x **80 912 30600**

With quick change jaw, VS, smooth 5 mm

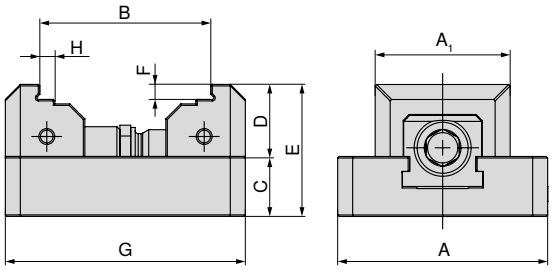

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	31 - 56	20	24	44	5	80	5	2 x **80 912 30700**
70	70	31 - 56	20	24	44	5	80	5	2 x **80 912 30800**
70	45	31 - 76	20	24	44	5	100	5	2 x **80 912 30700**
70	70	31 - 76	20	24	44	5	100	5	2 x **80 912 30800**

System jaws overview

Quick change jaw, grip 3 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		22	19						50,80	**80 912 30100**								●			
70	70		22	19						66,90	**80 912 30200**								●			

Quick change jaw, smooth step 5 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		24	19						61,50	**80 912 30300**								●			
70	70		24	19						77,80	**80 912 30400**								●			

Quick change jaw, VS, grip 3 mm

▲ Price per piece
▲ VS = Larger clamping range



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		22	19						50,80	**80 912 30500**								●			
70	70		22	19						66,90	**80 912 30600**								●			

Quick change jaw, VS, smooth 5 mm

▲ Price per piece
▲ VS = Larger clamping range



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		24	19						61,50	**80 912 30700**								●			
70	70		24	19						77,80	**80 912 30800**								●			

System jaws overview

Quick change jaw, soft, steel

▲ Material: 15NiCr13
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		24				26,5			41,00	**80 912 31000**								●			
70	70		24				26,5			41,00	**80 912 31100**								●			

Quick change jaw embossed profile

▲ Price per piece
▲ suitable for LANG embossed profile



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		22	19						77,80	**80 912 31200**								●			
70	70		22	19						77,80	**80 912 31300**								●			

Quick change jaw embossed profile, VS

▲ Price per piece
▲ Suitable for LANG embossed profile
▲ VS = Larger clamping range



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
70	45		22	19						95,00	**80 912 31400**								●			
70	70		22	19						95,00	**80 912 31500**								●			

System accessories overview

Socket

▲ Suitable for 3/8" square drive

ESG 4 | ZSG 4 | ZSG mini | DSG 4 | MSG 2

Square	DRVS mm	80 875 ... EUR Y4	
3/8"	11	18,20	11100

→ Page 176+180
Here you will find the suitable „magnetic workpiece stop“ and „torque key“ (article numbers **80 892 23800** and **80 884 402**).

Allen cap screw

▲ Price per piece

ZSG mini

G	80 912 ... EUR Y4	
M6x25	1,20	50100

Cylindrical pin

▲ Price per piece

ZSG mini



$D_{1\ m6}$ mm	M mm	80 912 ... EUR Y4	
12	18	2,30	50200

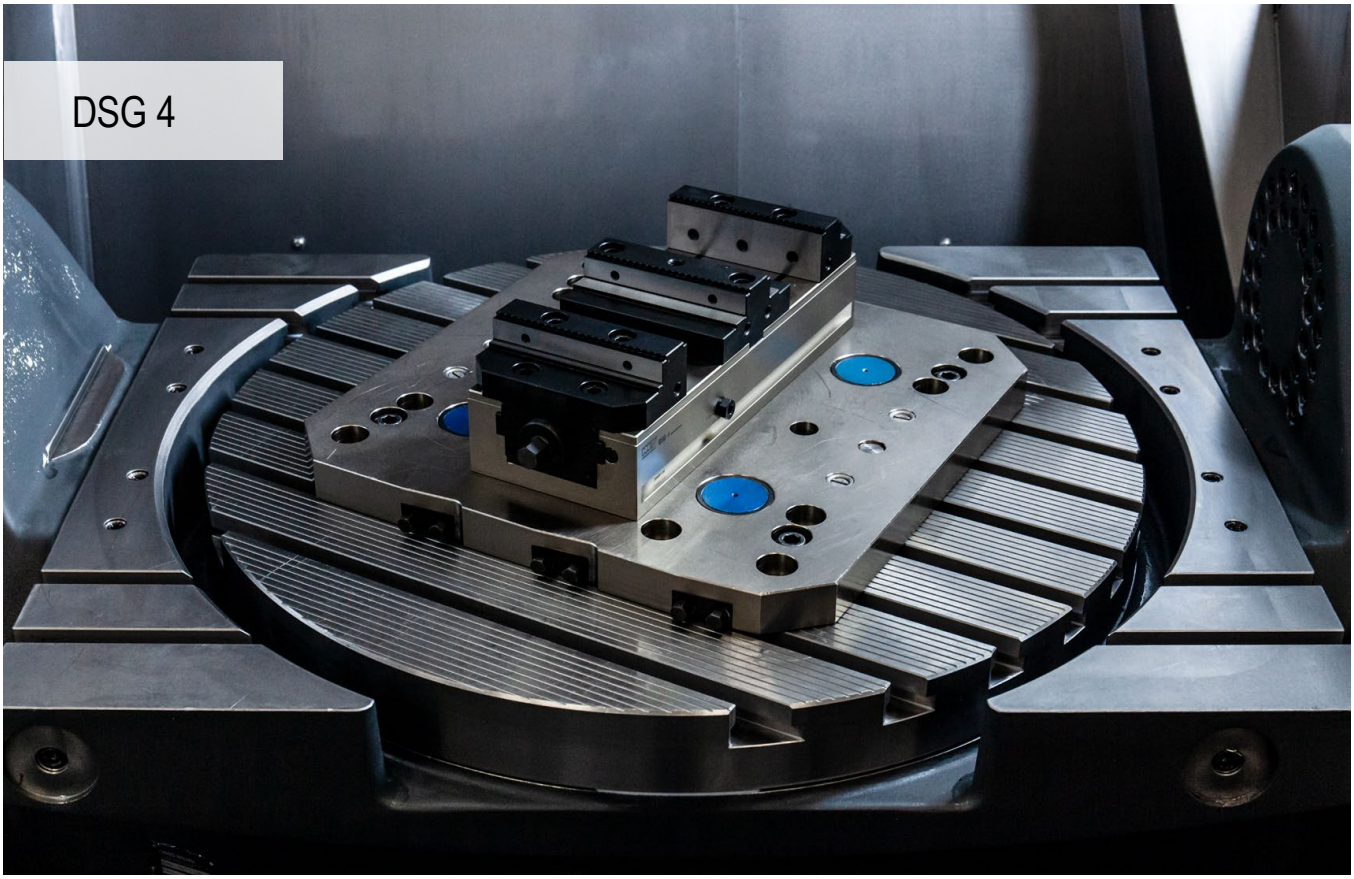

High accuracy and efficiency

The user-friendly DSG 4 clamping system guarantees consistently high precision and a wide application range.

Your benefits:

- ▲ Straightforward, stable third-hand function
- ▲ Quick and easy positioning on the MNG zero point clamping system
- ▲ High clamping force between 5 – 40 kN with low tightening torque
- ▲ Quick and easy jaw change with 2 screws
- ▲ Extensive modular jaw range

Clamping/aligning:

Mounting with MNG zero point clamping system (2-3 mounting bolts)

Mounting through the base body with four M8 screws

Mounting through the base body with two dowel screws **Article no. 80 895 019**

Mounting with 4-6 clamping claws **Article no. 80 890 315**

Clamping force:

DSG 4 – 80 mm tightening torque / clamping force

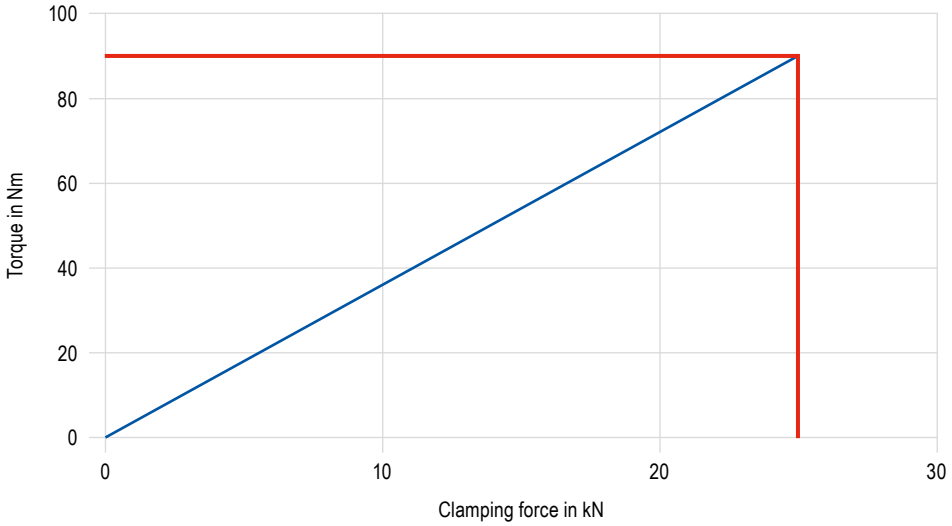

DSG 4 – 125 mm tightening torque / clamping force

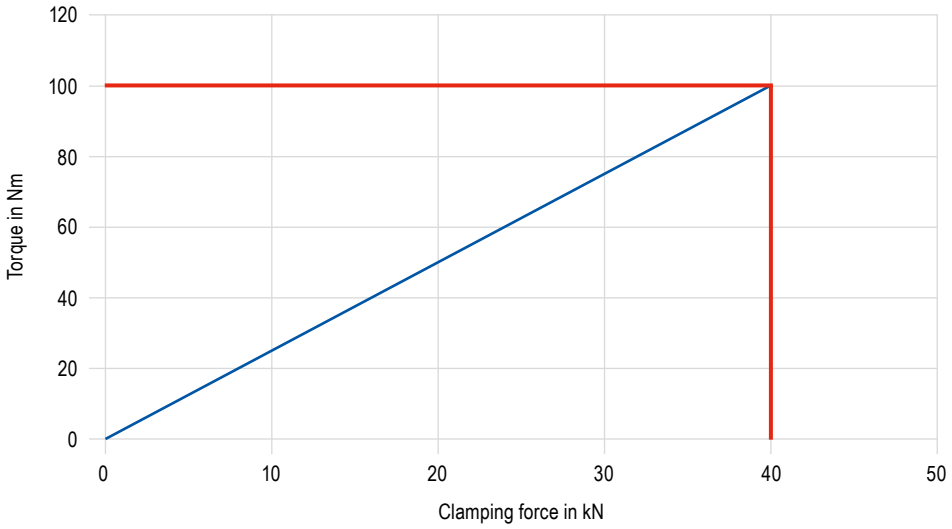

'Third hand' operation

The third-hand operation function on the DSG 4 is ensured by pre-loading the rear slide with compression springs.

The lateral clamping screw A is not tightened, instead it is open approx. 1/2 turn. When the vice is fully open, the movable jaws B and C are to be placed in the appropriate slots of slides D and E and secured according to the workpiece size. Two workpieces of different sizes can also be clamped.

Conversion to single vice

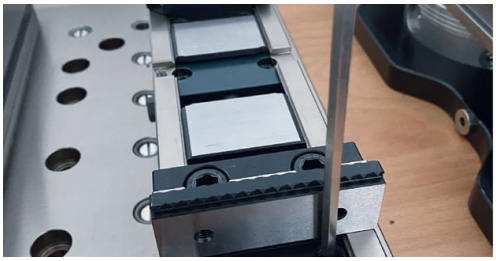

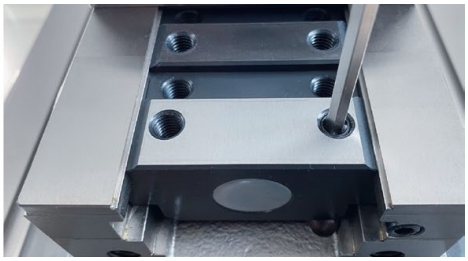

The rear slide is blocked via the hexagon socket grub screw and the DSG 4 can also be used as a single vice. **Important note:** Not suitable for using several vices as single vice next to one another. In this case, we advise modification with additional transverse slot in the base body and suitable fixed jaw.

PolyClamp – DSG 4

- ▲ double vice without jaws
- ▲ 100 % encapsulated
- ▲ fast assembly and disassembly
- ▲ flexible clamping system

DSG 4 | **MNG**

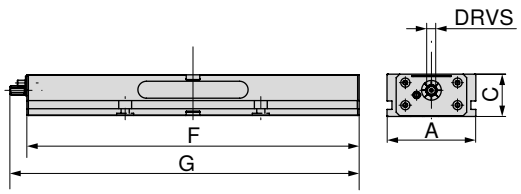

A mm	C mm	F mm	G mm	TQX Nm	DRVS mm	MXC kN	WT kg	80 906 ... EUR Y4	
80	55	300	308	90	12	0 - 25	8	1.560,00	**080**
125	60	320	347	100	14	0 - 40	14	1.850,00	**125**
125	60	390	417	100	14	0 - 40	17	2.040,00	**12700**
125	60	460	487	100	14	0 - 40	20	2.300,00	**12800**
125	60	530	557	100	14	0 - 40	24	2.510,00	**12900**
125	60	600	627	100	14	0 - 40	27	2.720,00	**13000**
125	60	670	697	100	14	0 - 40	30	2.840,00	**13100**
125	60	740	767	100	14	0 - 40	34	2.950,00	**126**

Vice guide

Structural dimension tables for the different jaws	105–107	System accessories	108+110
'Third hand' operation	102	Conversion to single vice	103
MNG-/PNG zero point clamping system	134–163	General accessories	164–183

DSG 4 underside dimensions

Base width 80 mm and length 300 mm

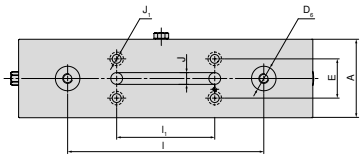

A mm	D_6 H6 mm	E ±0,015 mm	I ±0,01 mm	I_1 ±0,01 mm	J H7 mm	J_1 mm
80	25	40	200	100	12	9

Base width 125 mm and length 460 mm, 530 mm

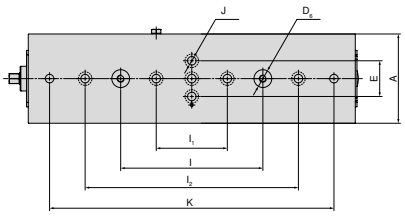

A mm	D_6 H6 mm	E ±0,015 mm	I ±0,01 mm	I_1 ±0,01 mm	I_2 ±0,002 mm	J H7 mm	K ±0,002 mm
125	25	50	200	100	300	12	400
125	25	50	200	100	300	12	500

Base width 125 mm and length 320 mm



A mm	D_6 H6 mm	E ±0,015 mm	I ±0,01 mm	I_1 ±0,01 mm	J H7 mm
125	25	50	200	100	12

Base width 125 mm and length 600 mm

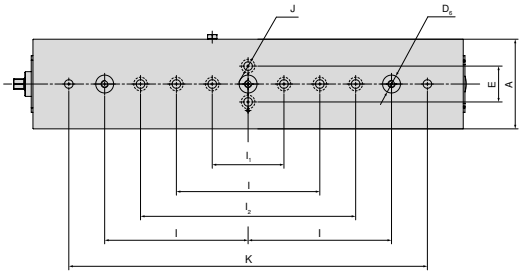

A mm	D_6 H6 mm	E ±0,015 mm	I ±0,01 mm	I_1 ±0,01 mm	I_2 ±0,002 mm	J H7 mm	K ±0,002 mm
125	25	50	200	100	300	12	500

Base width 125 mm and length 390 mm

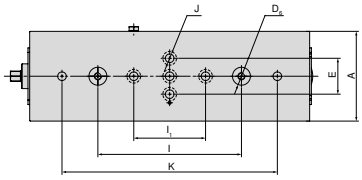

A mm	D_6 H6 mm	E ±0,015 mm	I ±0,01 mm	I_1 ±0,01 mm	J H7 mm	K ±0,002 mm
125	25	50	200	100	12	300

Base width 125 mm and length 670 mm, 740 mm

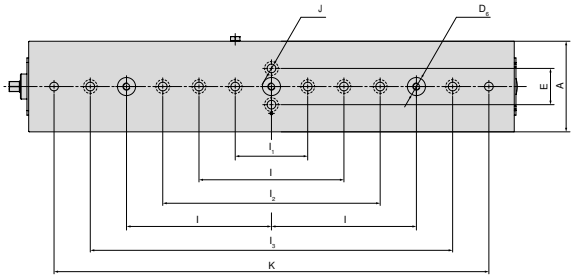

A mm	D_6 H6 mm	E ±0,015 mm	I ±0,01 mm	I_1 ±0,01 mm	I_2 ±0,002 mm	I_3 ±0,025 mm	J H7 mm	K ±0,002 mm
125	25	50	200	100	300	500	12	600
125	25	50	200	100	300	500	12	700

DSG 4 structural dimension table for the different jaws

With indexable jaws, grip and centre jaw, grip

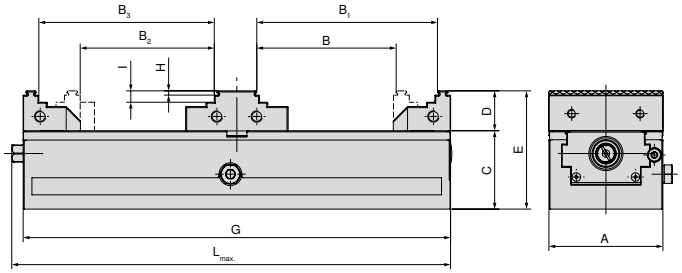

A mm	B mm	B_1 mm	B_2 mm	B_3	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
80	25 - 97	54 - 126	31 - 93	51 - 122	55	28	83	300	3	8	308	2 x **80 878 810** + **80 906 300**
125	40 - 86	75 - 121	42 - 79	68 - 114	60	40	100	320	3	18	347	2 x **80 901 303** + **80 906 304**
125	40 - 121	75 - 156	42 - 114	68 - 149	60	40	100	390	3	18	417	2 x **80 901 303** + **80 906 304**
125	40 - 156	75 - 191	42 - 149	68 - 184	60	40	100	460	3	18	487	2 x **80 901 303** + **80 906 304**
125	40 - 191	75 - 226	42 - 184	68 - 219	60	40	100	530	3	18	557	2 x **80 901 303** + **80 906 304**
125	40 - 226	75 - 261	42 - 219	68 - 254	60	40	100	600	3	18	627	2 x **80 901 303** + **80 906 304**
125	40 - 261	75 - 296	42 - 254	68 - 289	60	40	100	670	3	18	697	2 x **80 901 303** + **80 906 304**
125	40 - 296	75 - 331	42 - 289	68 - 324	60	40	100	740	3	18	767	2 x **80 901 303** + **80 906 304**

With indexable jaws, grip and centre jaw, smooth

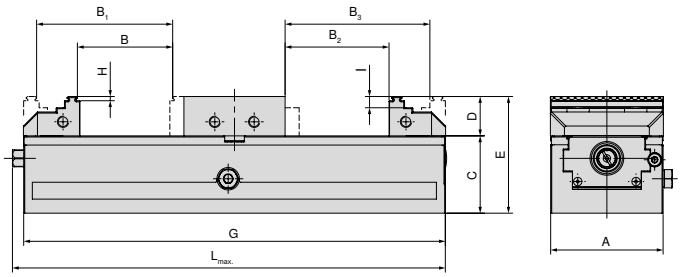

A mm	B mm	B_1 mm	B_2 mm	B_3	C mm	D mm	E mm	G mm	H mm	I mm	$L_{max.}$ mm	Article no. System jaws
80	5 - 67	34 - 96	0 - 73	40 - 102	55	28	83	300	3	8	308	2 x **80 878 810** + **80 906 301**
125	7 - 44	42 - 77	0 - 47	46 - 82	60	40	100	320	3	18	347	2 x **80 901 303** + **80 906 305**
125	7 - 79	42 - 112	0 - 82	46 - 117	60	40	100	390	3	18	417	2 x **80 901 303** + **80 906 305**
125	7 - 114	42 - 149	0 - 117	46 - 152	60	40	100	460	3	18	487	2 x **80 901 303** + **80 906 305**
125	7 - 147	42 - 182	0 - 152	46 - 187	60	40	100	530	3	18	557	2 x **80 901 303** + **80 906 305**
125	7 - 184	42 - 217	0 - 187	46 - 222	60	40	100	600	3	18	627	2 x **80 901 303** + **80 906 305**
125	7 - 219	42 - 252	0 - 222	46 - 257	60	40	100	670	3	18	697	2 x **80 901 303** + **80 906 305**
125	7 - 254	42 - 287	0 - 257	46 - 292	60	40	100	740	3	18	767	2 x **80 901 303** + **80 906 305**

DSG 4 structural dimension table for the different jaws

With block jaws and centre jaw smooth

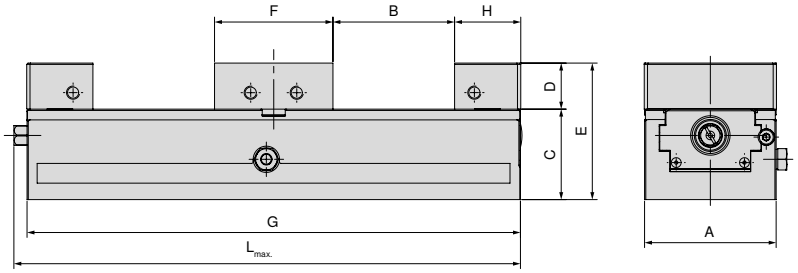

A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	$L_{max.}$ mm	Article no. System jaws
80	0 - 73	55	28	83	72	300	40	308	2 x **80 901 31300** + **80 906 301**
125	0 - 46	60	40	100	98	320	66	347	2 x **80 901 31500** + **80 906 305**
125	0 - 81	60	40	100	98	390	66	417	2 x **80 901 31500** + **80 906 305**
125	0 - 116	60	40	100	98	460	66	487	2 x **80 901 31500** + **80 906 305**
125	0 - 151	60	40	100	98	530	66	557	2 x **80 901 31500** + **80 906 305**
125	0 - 186	60	40	100	98	600	66	627	2 x **80 901 31500** + **80 906 305**
125	0 - 221	60	40	100	98	670	66	697	2 x **80 901 31500** + **80 906 305**
125	0 - 256	60	40	100	98	740	66	767	2 x **80 901 31500** + **80 906 305**

With pendulum and adapter plate

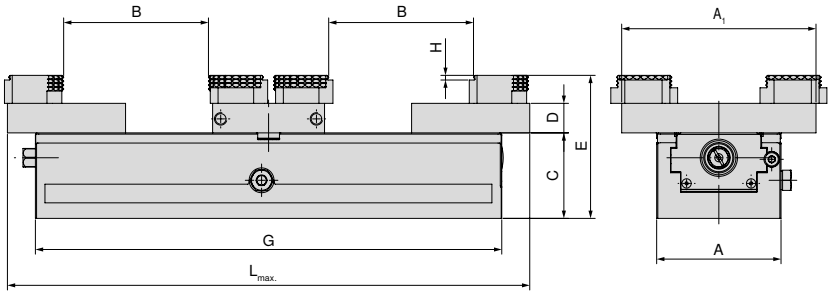

A mm	A_1 mm	B mm	C mm	D mm	E mm	G mm	H mm	$L_{max.}$ mm	Article no. System jaws
80	125	0 - 92	55	19	92	300	3	308	2 x **80 878 870** + **80 906 303**
125	180	7 - 92	60	22	100	320	3	365	2 x **80 878 570** + **80 906 307**
125	180	7 - 133	60	22	100	390	3	435	2 x **80 878 570** + **80 906 307**
125	180	7 - 168	60	22	100	460	3	505	2 x **80 878 570** + **80 906 307**
125	180	7 - 203	60	22	100	530	3	575	2 x **80 878 570** + **80 906 307**
125	180	7 - 238	60	22	100	600	3	645	2 x **80 878 570** + **80 906 307**
125	180	7 - 273	60	22	100	670	3	715	2 x **80 878 570** + **80 906 307**
125	180	7 - 308	60	22	100	740	3	785	2 x **80 878 570** + **80 906 307**

DSG 4 structural dimension table for the different jaws

With aluminium jaws and aluminium centre jaw

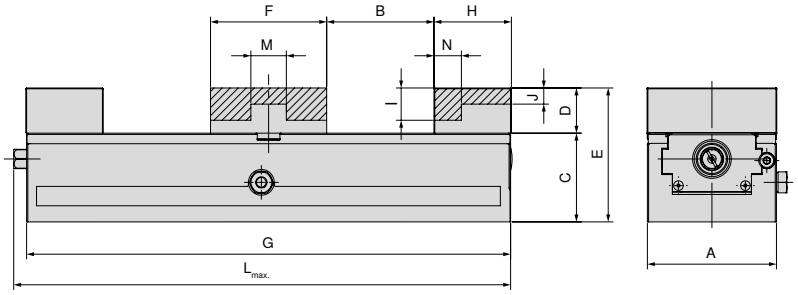

A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	$L_{max.}$ mm	M mm	N mm	Article no. System jaws
80	0 - 66	55	28	83	72	300	40	20	10	308	22	17	2 x **80 878 850** + **80 906 302**
125	0 - 42	60	40	100	98	320	68		17	347	38	28	2 x **80 878 550** + **80 906 306**
125	0 - 77	60	40	100	98	390	68		17	417	38	28	2 x **80 878 550** + **80 906 306**
125	0 - 112	60	40	100	98	460	68		17	487	38	28	2 x **80 878 550** + **80 906 306**
125	0 - 147	60	40	100	98	530	68		17	557	38	28	2 x **80 878 550** + **80 906 306**
125	0 - 182	60	40	100	98	600	68		17	627	38	28	2 x **80 878 550** + **80 906 306**
125	0 - 217	60	40	100	98	670	68		17	697	38	28	2 x **80 878 550** + **80 906 306**
125	0 - 252	60	40	100	98	740	68		17	767	38	28	2 x **80 878 550** + **80 906 306**

System jaws overview

Indexable jaw, grip 3 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	125		40	37			66			224,00	**80 901 303**				●	●				●		

Indexable jaw, grip 3 mm, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			40			135,00	**80 878 810**				●	●		●		●		

Centre jaw, grip

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28	25			72			278,00	**80 906 300**									●		
125	125		40	37			98			370,00	**80 906 304**									●		

Centre jaw, smooth

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				72			214,00	**80 906 301**									●		
125	125		40				98			317,00	**80 906 305**									●		

System jaws overview

Alu jaw, movable

▲ for producing shaped jaws
▲ Price per piece




For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				48			86,40	**80 878 850**				●	●		●		●		
125	125		40				68			98,30	**80 878 550**				●					●		

Centre jaw, Alu

▲ for producing shaped jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				72			77,80	**80 906 302**									●		
125	125		40				98			105,00	**80 906 306**									●		

Block jaw, movable

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	80		28				40			244,00	**80 901 31300**				●	●		●		●		
125	125		40				66			342,00	**80 901 31500**				●					●		

Pendulum jaw, movable

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	125		19				76			409,00	**80 878 870**				●			●		●		
125	180		22				95			426,00	**80 878 570**				●			●		●		

System jaws overview

Centre jaw adapter plate, fixed

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	125		19				72			291,00	**80 906 303**									●		
125	180		22				98			346,00	**80 906 307**									●		

6 function indexable jaw

▲ 1 = Smooth, carbide coated
▲ 2 = Grip with 3 mm step
▲ 3 = Grip with 8 mm step
▲ 4 = Grip with 18 mm step
▲ 5 = Rough grip with 8 mm step
▲ 6 = Round grip
▲ M_{max} = 60 Nm
▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

6x indexable jaw, carbide grip

▲ 1 = Smooth
▲ 2 = Carbide grip
▲ 3 = Carbide grip with 3 mm step
▲ 4 = Carbide grip with 8 mm step
▲ 5 = Round carbide grip with 8 mm step
▲ 6 = Round carbide grip
▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

System accessories overview

Plastic protection plugs

DSG 4

G	**80 906 ...** EUR Y4	
M10x12	1,20	**500**

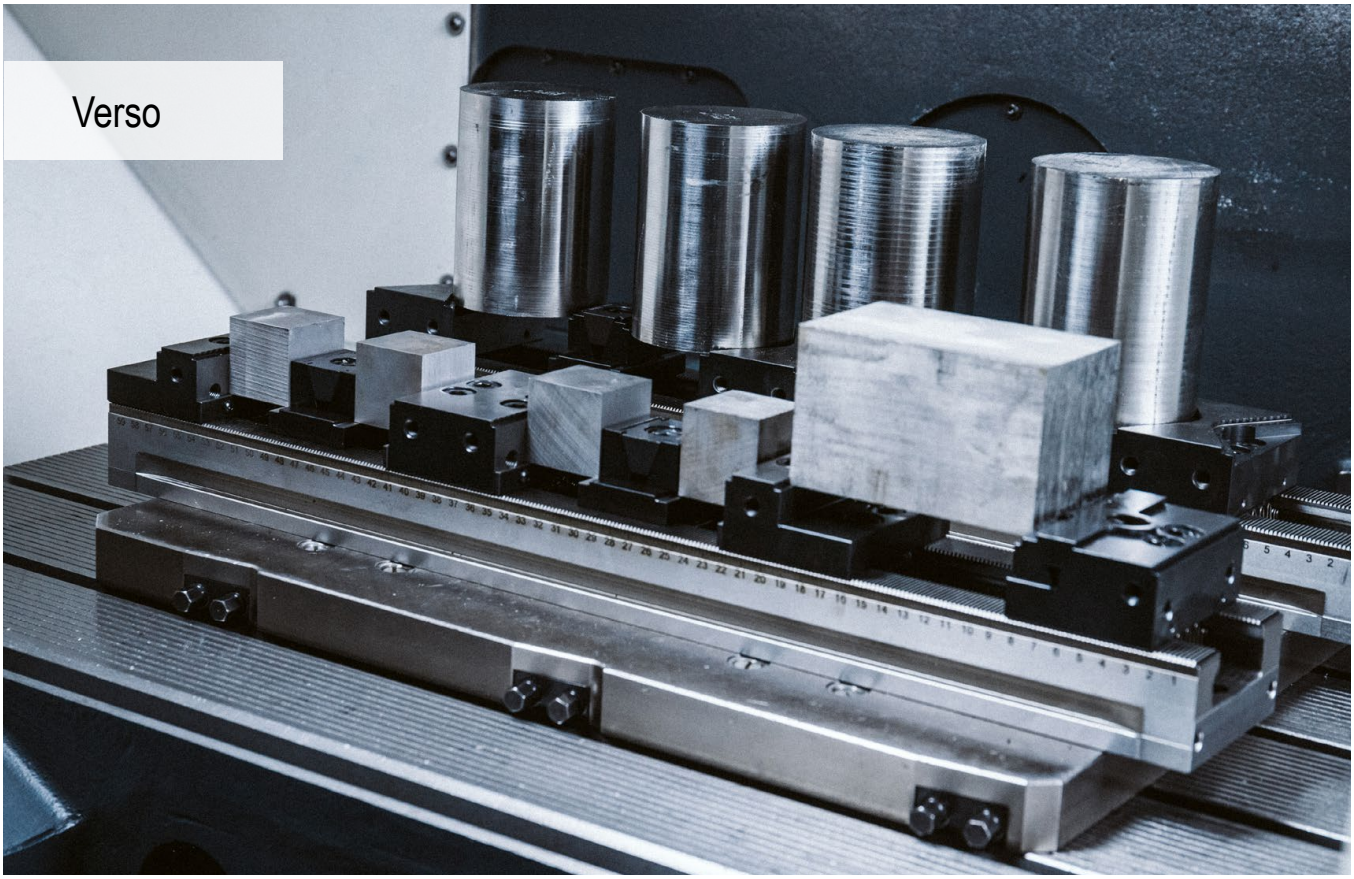

The all-rounder for workpiece clamping

The new multiple vice enables you to easily clamp many small and large workpieces on a 3-, 4-, or 5-axis machine. Even slimmer jaws have further increased the part thickness.

Your benefits:

- ▲ Hardened and ground teeth ensure the highest level of precision and dimensional stability
- ▲ Fast jaw changeover system for fixed and adjustable jaws
- ▲ Full modular range for all types of machining centres
- ▲ Multi-clamping with wedge grip elements
- ▲ Extensive modular system jaw range
- ▲ Simple clamping bar extension with connecting element

Clamping/aligning:

Using T-slots or screws
Alignment in the T-slot (14, 16, 18 mm) with the matching alignment set for T-slots.
For 12 mm T-slot: use two Ø 12 cylinder pins.

Using clamping claws
Alignment set and clamping using clamping claws attached at the side.

Using grid holes
Position and fasten the workpieces using two Ø12f7 / M12 dowel screws in the first and last holes of the clamping bar.
Additional fastening using M12 cylindrical screws in the remaining holes.

Clamping/aligning:

With a zero point clamping system
The clamping bar is equipped with MNG interfaces that enable MNG clamping bolts to be attached
(up to a base body length of 500 mm = 2 clamping bolts / from 600 mm upwards = 3 clamping bolts).

Clamping force:

Verso tightening torque/clamping force

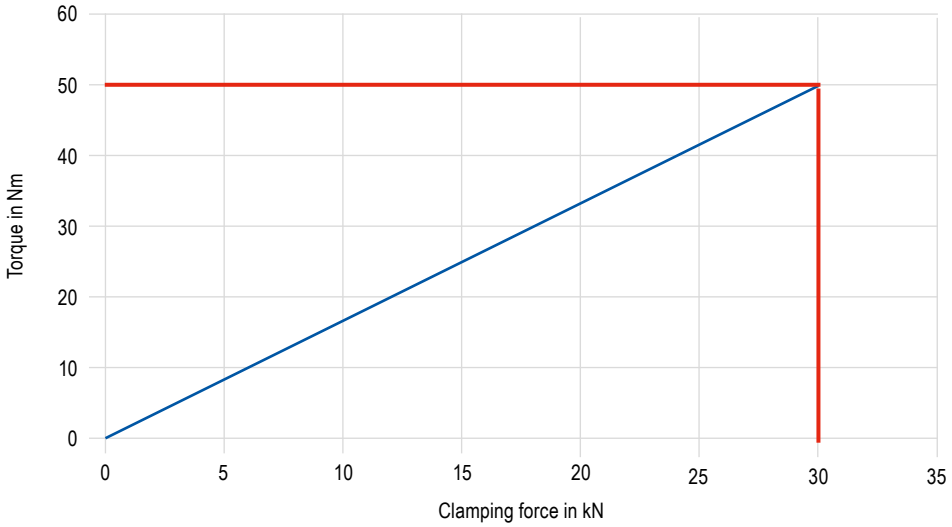

Quick jaw change for fixed and adjustable jaws

The Verso multiple vice is equipped with a quick jaw change system as standard. Simply use the two screws to release, remove or reposition the fixed and adjustable jaw. The jaws are removed in an upwards direction, allowing each jaw to be removed individually, without taking out any others. This reduces the set-up time significantly.



Release position

Undo screws

Take off and insert

Tighten screws



Clamping position

Quick jaw change

The fixed and adjustable jaws of the Verso multiple vice system are equipped with a quick jaw change system as standard. Two screws can be used to release and change the jaw, making jaw changes extremely quick.

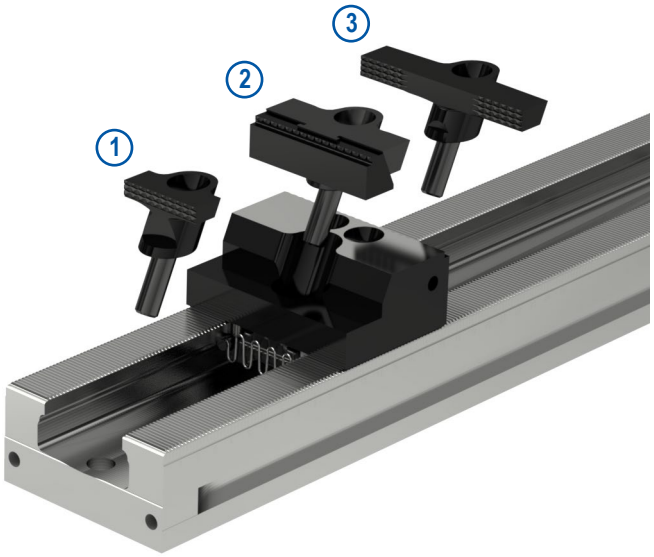

1. Pull-down jaw, grip
2. Parallel clamping jaw
3. Pendulum jaw grip with pull-down action

Connecting the clamping bars

A connecting element allows two or more Verso clamping bars to be combined with one another or extended.

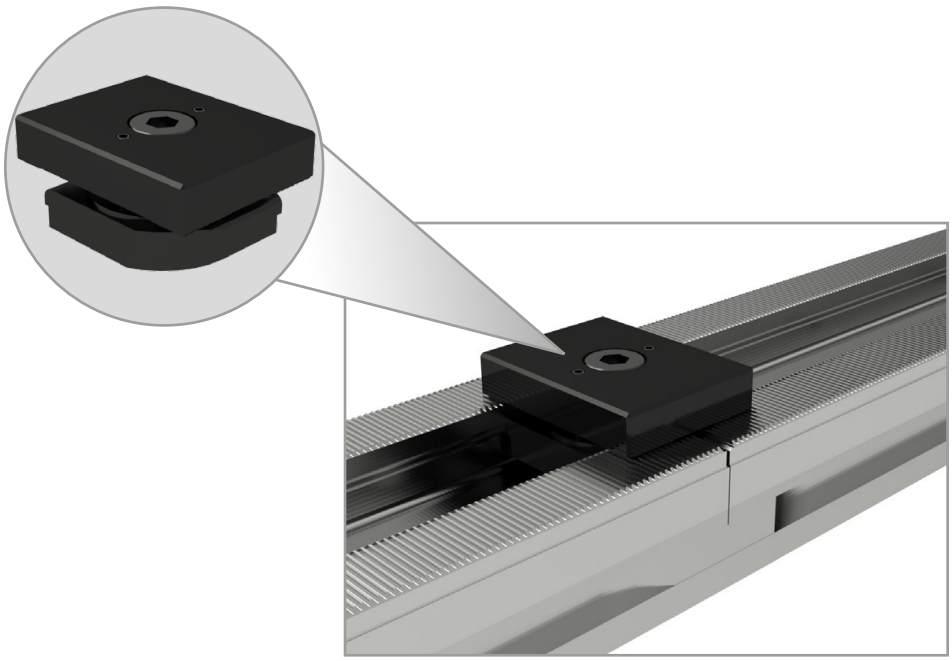

PolyClamp – Verso

- ▲ For single and multi-clamping
- ▲ Multi-clamping with wedge grip elements
- ▲ Workpieces can be clamped on 3-, 4- or 5-axis machine
- ▲ Adapter plates for MNG available

Scope of supply:
Body without jaws

Verso | **MMG**

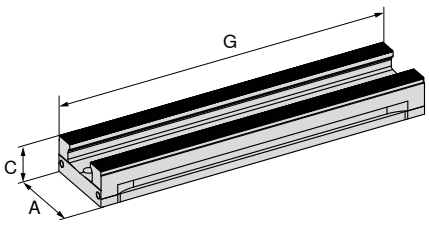

NEW

A mm	C mm	G mm	MXC kN	WT kg	80 914 ... EUR Y4	
90	45	260	0 - 50	5,0	804,00	**09000**
90	45	400	0 - 50	7,7	1.060,00	**09100**
90	45	500	0 - 50	9,6	1.280,00	**09200**
90	45	600	0 - 50	11,5	1.540,00	**09300**
90	45	650	0 - 50	12,5	1.640,00	**09400**

Verso – Structural dimension table

Clamping rail

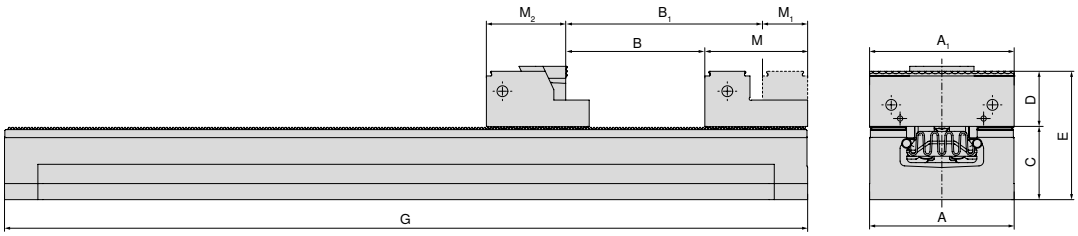

A mm	A_1 mm	B mm	B_1 mm	C mm	D mm	E mm	G mm	M mm	M_1 mm	M_2
90	40 / 65 / 90	145	181	45	35	80	260	64	28	53,5
90	40 / 65 / 90	285	321	45	35	80	400	64	28	53,5
90	40 / 65 / 90	385	421	45	35	80	500	64	28	53,5
90	40 / 65 / 90	485	521	45	35	80	600	64	28	53,5
90	40 / 65 / 90	535	571	45	35	80	650	64	28	53,5

When using the 90 mm pendulum jaw grip and parallel clamping jaws, dimensions B, B_1 and M_2 will differ.

Vice guide

Underside Dimensions	115	Overview of clamping ranges	116
System accessories	117–124	General accessories	164–183

Verso underside dimensions

Base width 90 mm and length 260 mm

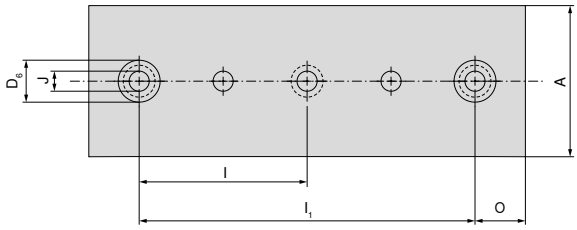

A mm	D6 H7 mm	I ±0,015 mm	I1 ±0,015 mm	J F7 mm	O ±0,015 mm
90	25	100	200	12	30

Base width 90 mm and length 600 mm

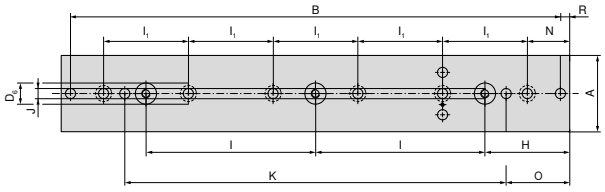

A mm	B mm	D6 H7 mm	H ±0,015 mm	I ±0,015 mm	I1 ±0,015 mm	J F7 mm	K ±0,015 mm	N mm	O ±0,015 mm	R mm
90	578	25	100	200	100	12	450	50	75	11

Base width 90 mm and length 400 mm

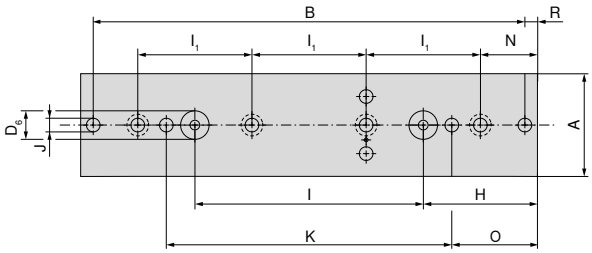

A mm	B mm	D6 H7 mm	H ±0,015 mm	I ±0,015 mm	I1 ±0,015 mm	J F7 mm	K ±0,015 mm	N mm	O ±0,015 mm	R mm
90	378	25	100	200	100	12	250	50	75	11

Base width 90 mm and length 650 mm

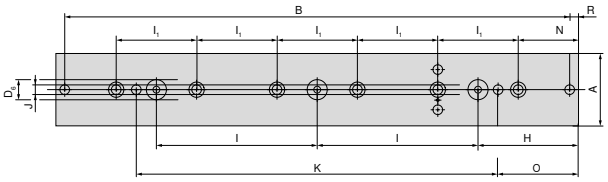

A mm	B mm	D6 H7 mm	H ±0,015 mm	I ±0,015 mm	I1 ±0,015 mm	J F7 mm	K ±0,015 mm	N mm	O ±0,015 mm	R mm
90	628	25	125	200	100	12	450	75	100	11

Base width 90 mm and length 500 mm

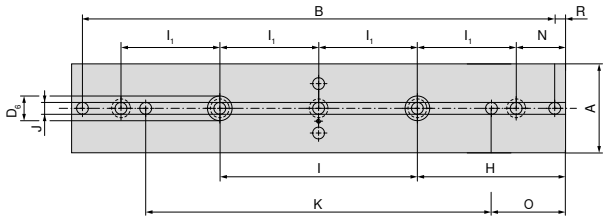

A mm	B mm	D6 H7 mm	H ±0,015 mm	I ±0,015 mm	I1 ±0,015 mm	J F7 mm	K ±0,015 mm	N mm	O ±0,015 mm	R mm
90	478	25	150	200	100	12	350	50	75	11

Verso – Overview of clamping ranges

The clamping range shows the max. workpiece size depending on the number of clamping points for the individual clamping bar lengths.

Adjustable jaws with 40 mm pull-down jaw grip

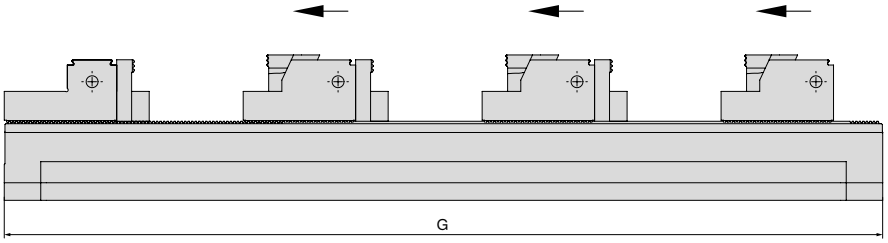

G mm	Number of workpieces 1	2	3	4	5	6	7	Article no. Vices
260	134	36	–	–	–	–	–	**80 914 09000**
400	274	106	50	22	–	–	–	**80 914 09100**
500	374	156	82	45	24	–	–	**80 914 09200**
600	474	206	116	72	44	26	–	**80 914 09300**
650	524	230	135	84	54	34	20	**80 914 09400**

Adjustable jaws with parallel clamping jaws

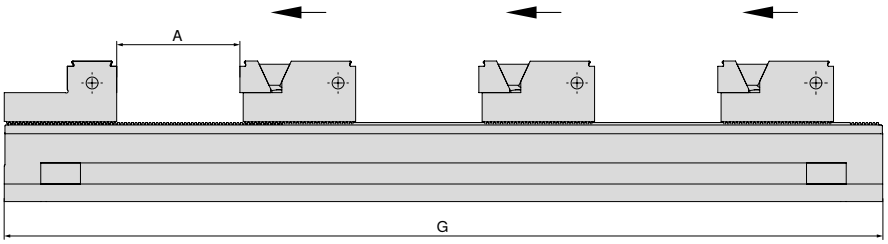

G mm	Number of workpieces 1 A	2 A	3 A	4 A	5 A	6 A	7 A	8 A	9 A	Article no. Vices
260	175	59	–	–	–	–	–	–	–	**80 914 09000**
400	315	129	67	27	10	–	–	–	–	**80 914 09100**
500	415	179	100	61	30	15	–	–	–	**80 914 09200**
600	515	229	133	86	57	32	19	10	–	**80 914 09300**
650	565	254	150	98	67	46	26	16	8	**80 914 09400**

With wedge grip elements

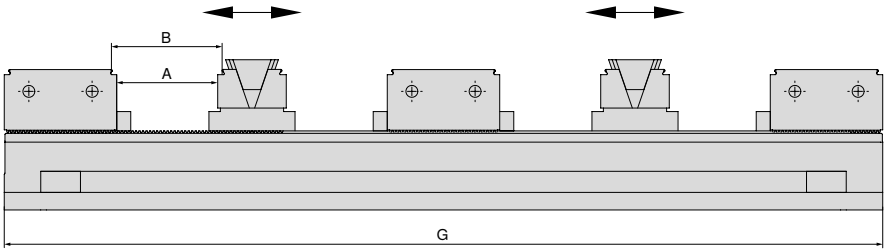

G mm	Number of workpieces 2 A	2 B	4 A	4 B	6 A	6 B	8 A	8 B	Article no. Vices
260	45	50	–	–	–	–	–	–	**80 914 09000**
400	115	120	31	36	–	–	–	–	**80 914 09100**
500	165	170	56	61	19	24	–	–	**80 914 09200**
600	215	220	81	86	36	41	14	19	**80 914 09300**
650	240	245	93	98	44	49	20	25	**80 914 09400**

System jaws overview

Stop jaw, fixed, grip 2,9 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		32	34,9			64			342,00	**80 914 31800**										●	

Indexable jaw, fixed, smooth

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		34,9	17			64	35,9	28,1	364,00	**80 914 32000**										●	

Stop jaw, fixed, grip 2,9 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	65		34,9	32	17		64	28,1	35,9	352,00	**80 914 31100**										●	
90	65	40	34,9	32	17		64	28,1	35,9	340,00	**80 914 31000**										●	
90	90		34,9	32	17		64	28,1	35,9	364,00	**80 914 31200**										●	

Reversible adjustable jaw profiled, grip 2,9 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	65		34,9	32	17		64	42	22	352,00	**80 914 31400**										●	
90	65	40	34,9	32	17		64	42	22	340,00	**80 914 31300**										●	
90	90		34,9	32	17		64	42	22	364,00	**80 914 31500**										●	

Reversible adjustable jaw, smooth

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		34,9	17			64	42	22	364,00	**80 914 31600**										●	

System jaws overview

Reversible adjustable jaw, high

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	65		165				124			1.220,00	**80 914 31700**										●	

Prismatic jaw, smooth, grip 2,9 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		34,9	32			64			364,00	**80 914 31900**										●	

Wedge jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40	65	35	11			49			347,00	**80 914 32100**										●	
90	40	65	39	11			49			236,00	**80 914 32400**										●	

Wedge grip jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40	65	35	11			49			371,00	**80 914 32200**										●	
90	40	65	39	11			49			236,00	**80 914 32500**										●	

Wedge grip jaw, 3 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40	65	35	32			49			371,00	**80 914 32300**										●	

System jaws overview

Jaw, grip

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
65	65		35	7			10			41,00	**80 889 656**										●	
65	40		35	7			10			36,80	**80 889 406**										●	
90	90		35	7			10			46,50	**80 889 906**										●	

Jaw, soft

▲ Material: 16MnCr5
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
65	65		35				16			41,00	**80 889 657**										●	
65	40		35				16			37,80	**80 889 407**										●	
90	90		35				16			49,70	**80 889 907**										●	

Base jaw

▲ Price per piece
▲ For Alu jaw Article no. **80 914 34200**



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90			9,1	80			40			212,00	**80 914 34100**										●	

Soft Alu-jaw

▲ Price per piece
▲ For Base jaw Article no. **80 914 34100**



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		34,9				75			81,00	**80 914 34200**										●	

Pull-down jaw, grip

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		25				41			105,00	**80 914 32600**										●	

System jaws overview

Pull-down jaw, grip – round

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		25				41			118,00	**80 914 32700**										●	

Parallel clamping jaw, grip – round

▲ Price per piece

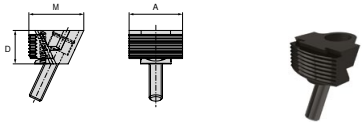

For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		25				41			219,00	**80 914 32800**										●	

Parallel clamping jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		25	22			41			175,00	**80 914 32900**										●	
90	65		25	22			41			216,00	**80 914 33000**										●	
90	90		25	22			41			259,00	**80 914 33100**										●	

Pendulum jaw, grip

▲ Price per piece

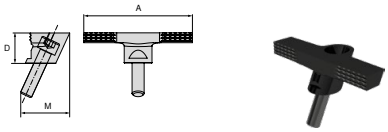

For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		25				41			182,00	**80 914 33200**										●	

Clamping Wedge

▲ Price per piece

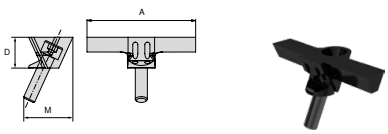

For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		25				41			200,00	**80 914 33300**										●	

System jaws overview

Parallel clamping jaw, smooth

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		25	22			41			167,00	**80 914 33400**										●	
90	65		25	22			41			271,00	**80 914 33500**										●	
90	90		25	22			41			286,00	**80 914 33600**										●	

Parallel clamping jaw, grip

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90			25			42,5			259,00	**80 914 33700**										●	

Jaw, steel

▲ Material: 16MnCr5
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		18				30			83,20	**80 914 33800**										●	

Jaw, alu

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		18				30			83,20	**80 914 33900**										●	

Fixed adaptor jaw

▲ to accommodate 6-way reversible jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	160		17				74			453,00	**80 914 34000**										●	

System jaws overview

6 function indexable jaw

- ▲ 1 = Smooth, carbide coated
- ▲ 2 = Grip with 3 mm step
- ▲ 3 = Grip with 8 mm step
- ▲ 4 = Grip with 18 mm step
- ▲ 5 = Rough grip with 8 mm step
- ▲ 6 = Round grip
- ▲ M_{max} = 60 Nm
- ▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

6x indexable jaw, carbide grip

- ▲ 1 = Smooth
- ▲ 2 = Carbide grip
- ▲ 3 = Carbide grip with 3 mm step
- ▲ 4 = Carbide grip with 8 mm step
- ▲ 5 = Round carbide grip with 8 mm step
- ▲ 6 = Round carbide grip
- ▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●			●		●	●	

Workpiece supports overview

Workpiece support

▲ Price for 2 pieces



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		11				3			52,90	**80 914 73100**										●	

Workpiece supports, offset

▲ Price for 2 pieces





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		30							87,40	**80 914 70200**										●	
90	40		25							87,40	**80 914 70100**										●	

Workpiece supports, offset

▲ Price for 2 pieces



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	65		11							87,40	**80 914 71100**										●	
90	65		17							87,40	**80 914 71200**										●	
90	65		25							87,40	**80 914 71300**										●	
90	65		30							87,40	**80 914 71400**										●	

Workpiece supports, offset

▲ Price for 2 pieces





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		11							87,40	**80 914 72100**										●	
90	90		17							87,40	**80 914 72200**										●	
90	90		25							87,40	**80 914 72300**										●	
90	90		30							87,40	**80 914 72400**										●	

System accessories overview

Adjustable stop with basic body

▲ for vibration damping
▲ height adjustable 16 – 17 mm

Verso





NEW

H mm	A mm	M mm	80 914 ... EUR Y4	
16	72	50	243,00	50100

Clamping Screw Set for T-slot for MNG

Scope of supply:
Clamping screw and T-Nuts

Verso

NEW

for slot width mm	G	80 914 ... EUR Y4	
20	M12	42,20	50500
22	M12	49,70	50600
24	M12	60,50	50700

Support

▲ for vibration damping: Article no. **80 914 50100**

Verso





NEW

H mm	A mm	M mm	80 914 ... EUR Y4	
8	20	28	62,70	50200
13	20	28	62,70	50300

Alignment Pin

Verso

NEW

D_1 mm	D_2 mm	80 914 ... EUR Y4	
12	14	107,00	81400
12	16	107,00	81600
12	18	107,00	81800

Joint

▲ to connect 2 basic bodies

Verso





NEW

A mm	80 914 ... EUR Y4	
90	183,00	50400

Cover

Verso





NEW

A mm	D mm	M mm	80 914 ... EUR Y4	
50	84	0,5	15,80	51000
50	86	0,5	6,80	50800
200	86	0,5	10,10	50900

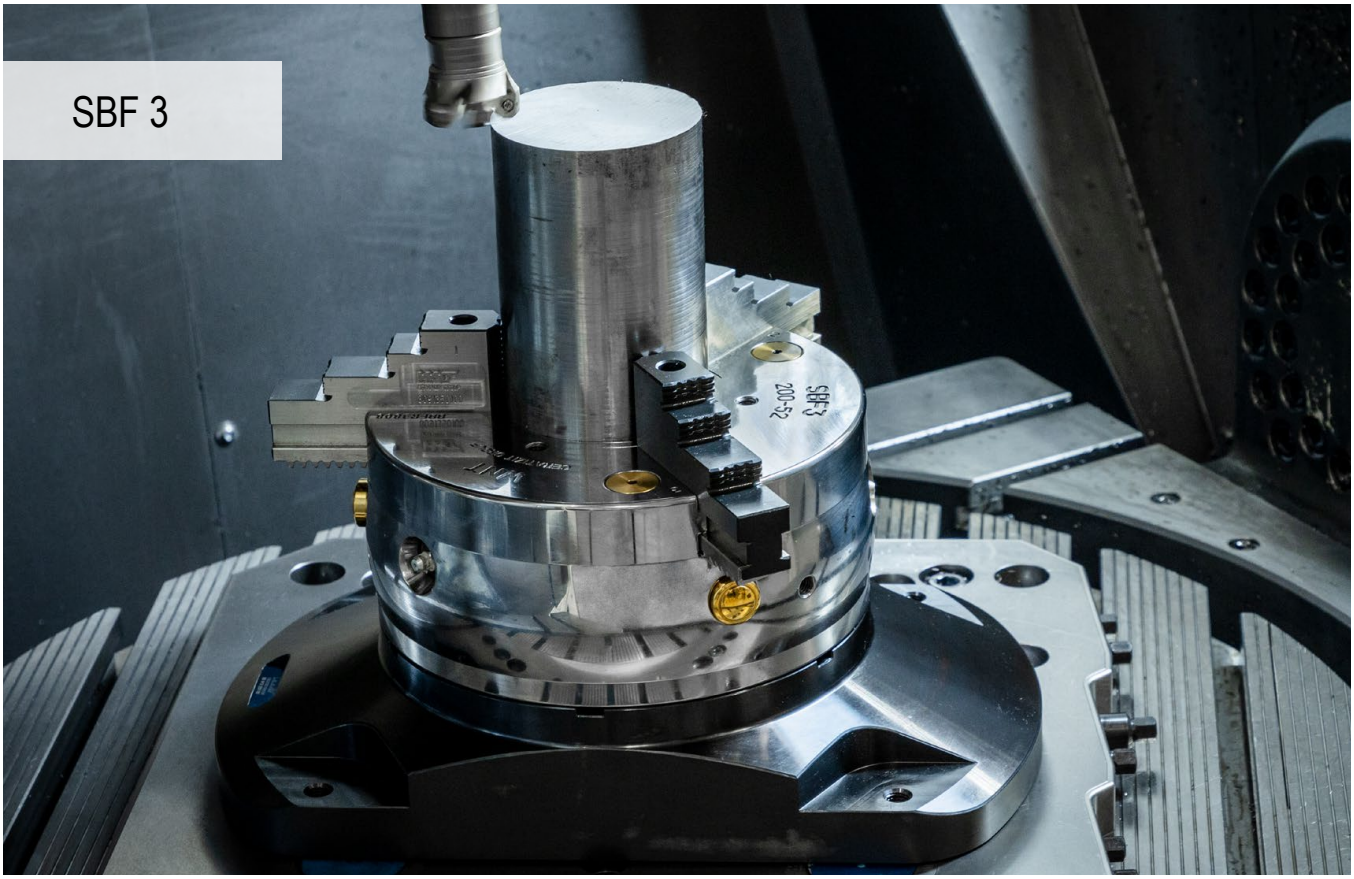

Hotly anticipated – now also for round components

Machining round components has become daily routine for many companies. We now have a solution in the portfolio in the form of the SBF 3 stationary three-jaw chuck – fully compatible with the in-house MNG and PNG zero point clamping systems for rapid, uncomplicated handling.

Your benefits:

- ▲ Suitable for 3/5-axis machining of round components
- ▲ Compatible with PNG and MNG zero point clamping systems
- ▲ Quick change jaw system with single release of jaws
- ▲ Spindle with hex connection

SBF 3 Ø 200 mm

SBF 3 Ø 315 mm

Technical information – cross-section diagram

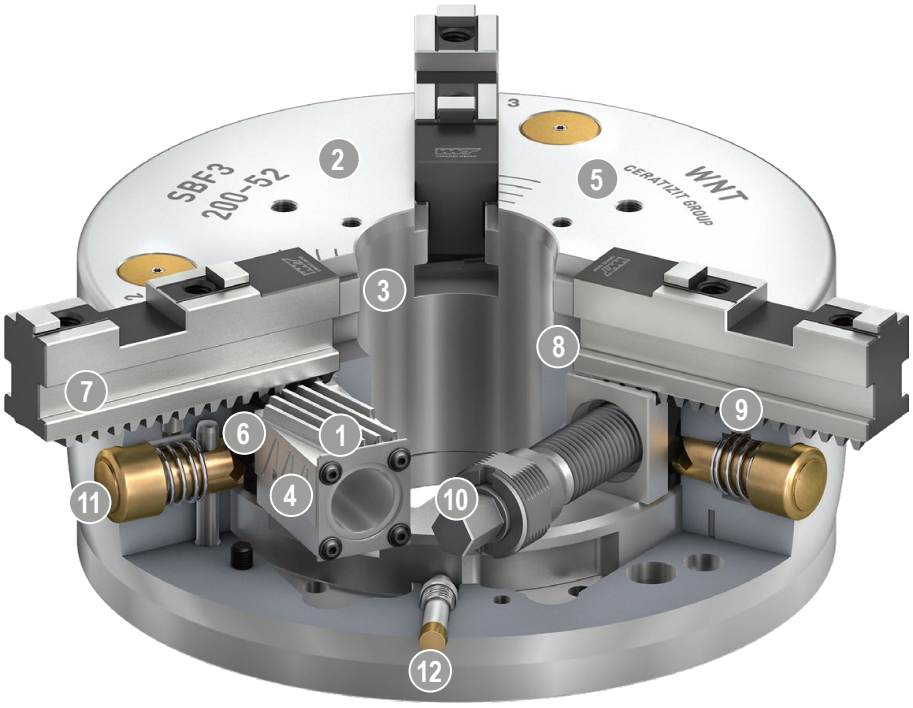

1	**Wedge bar drive** Allows for excellent machining results	7	**Base jaws with angled teeth (SFG)**
2	**Hardened and extremely stiff base body** Longer service life with maximum precision as a result – even at the highest clamping force	8	**Locking mechanism** Guarantees secure engagement of the base jaw teeth with the wedge bar teeth
3	**Large through hole** For machining all common bar material diameters (optional: enlargement of through hole)	9	**Engagement pin** For pre-positioning the base jaw
4	**Optimised lubrication system** For high degree of efficiency	10	**Actuation via hex connection** Easier operation as a result
5	**Mounting threads** For workpiece stops or cover plates	11	**Pushbutton for jaw change** For extremely short setup times
6	**Quick jaw change system** Single release of jaws, meaning extremely short setup times	12	**Indicator pin** For visual stroke monitoring of the manual clamping chuck

SBF 3 three-jaw chuck (Ø 200 mm) with console

- ▲ Suitable for 3/5-axis machining of round components
- ▲ Compatible with PNG and MNG zero point clamping systems (zero point clamping bolts must be ordered separately)
- ▲ Quick change jaw system with single release of jaws
- ▲ Spindle with hex connection

Scope of supply:

SBF 3 three-jaw chuck (Ø 200 mm) including console (PNG- and MNG-compatible)
1 set GBA base jaws
1 set SB-H stepped jaws
6 fixing screws and clamping key

SBF 3

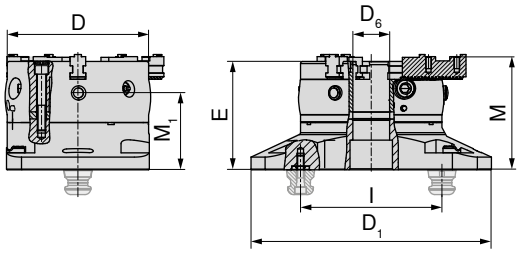

D	D1	D6	E	I	M	M1	MXC	TQX	DRVS	Stroke / jaw	Tooth pitch	WT	80 913 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	kN	Nm	mm	mm	mm	kg		
200	340	52	153,3	200	160,1	108,8	100	120	12	7	4,8	49,5	3.964,00	20000

SBF 3 three-jaw chuck (Ø 315 mm) with console

- ▲ Suitable for 3/5-axis machining of round components
- ▲ Compatible with PNG and MNG zero point clamping systems (zero point clamping bolts must be ordered separately)
- ▲ Quick change jaw system with single release of jaws
- ▲ Spindle with hex connection

Scope of supply:

SBF 3 three-jaw chuck (Ø 315 mm) including console (PNG- and MNG-compatible)
1 set GBA base jaws
1 set SB-H stepped jaws
6 fixing screws and clamping key

SBF 3

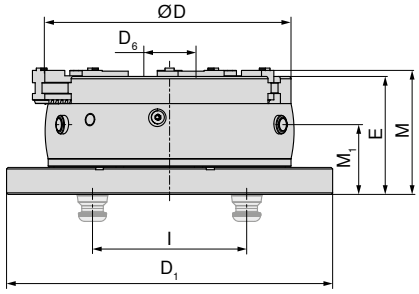

D	D1	D6	E	I	M	M1	MXC	TQX	DRVS	Stroke / jaw	Tooth pitch	WT	80 913 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	kN	Nm	mm	mm	mm	kg		
315	423	92	153	200	160,86	90,5	180	220	16	9,9	7	95	6.537,00	31500

The chuck is designed exclusively for stationary use – do not use while rotating!

System jaws overview

Base jaws (GBA) – set

▲ Base jaws with angled teeth
▲ Price per set of 3 pieces

Scope of supply:

3 base jaws with angled teeth
Including cylindrical screws

SBF 3

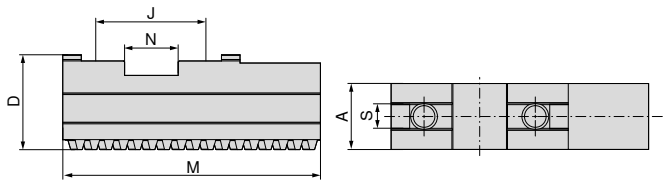

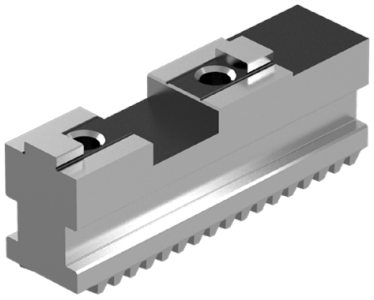

for	A mm	D mm	J mm	M mm	N mm	S mm	G	WT kg	80 913 ... EUR Y4	
SBF-3.200	22	32	40	90	20	10	M8x1	1,2	242,00	50300
SBF-3.315	32	43	54	125	26	12	M12x1,5	3,1	400,00	60300

Soft top jaws (AB-W) – set

▲ Price per set of 3 pieces
▲ Material: 16MnCr5

Scope of supply:

3 soft top jaws

SBF 3

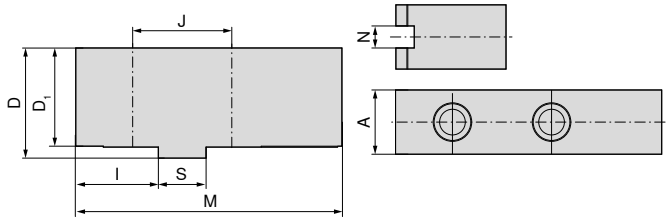



for	A mm	D mm	D_1 mm	I mm	J mm	M mm	N mm	S mm	Hole for	WT kg	80 913 ... EUR Y4	
SBF-3.200	22	47	43	35	40	105	10	20	M8	2,0	47,30	50400
SBF-3.315	35	60	54	45	54	145	12	26	M12	5,6	98,20	60400

System jaws overview

Hard stepped top jaws (AB-H) – set

▲ Price per set of 3 pieces

Scope of supply:
3 hard stepped top jaws

SBF 3

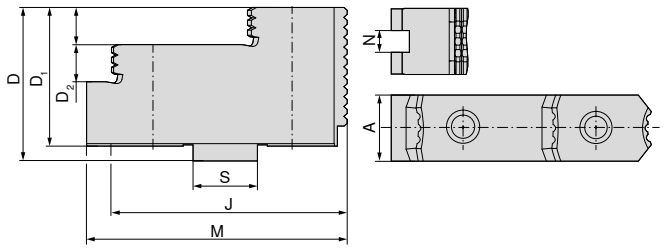



for	A mm	D mm	D_1 mm	D_2 mm	J mm	M mm	N mm	S mm	Hole for	WT kg	80 913 ... EUR Y4	
SBF-3.200	22	42	38	10	40	71,7	10	20	M8	2,4	207,00	**50200**
SBF-3.315	36	62	56	15	54	105	12	26	M12	3,3	303,00	**60200**

Dimension table – Hard stepped top jaws (AB-H)



Basic jaw position 2



Basic jaw position 1



Basic jaw position 2



Basic jaw position 1

			Externall clamping range							
3-jaw chuck		System jaw	A_1	A_2	A_3	A_4	A_5	A_6	A_7	A_8
SBF-3.200	**80 913 50200**	SBF-3.AB-H.200.71,7.22.10	7–76	57–125	108–177	135–204	55–125	14–77	66–129	93–156
SBF-3.315	**80 913 60200**	SBF-3.AB-H.315.105.36.15	14–125	93–224	202–333	–	87–219	44–130	153–239	–

			Internal clamping range					
3-jaw chuck		System jaw	l_1	l_2	l_3	l_4	l_5	l_6
SBF-3.200	**80 913 50200**	SBF-3.AB-H.200.71,7.22.10	72–141	99–168	151–220	120–189	147–216	199–268
SBF-3.315	**80 913 60200**	SBF-3.AB-H.315.105.36.15	93–204	202–313	–	167–298	276–407	–

System jaws overview

Hard stepped top jaws (SB-H) – set

▲ Stepped block jaws with angled teeth
▲ Price per set of 3 pieces

Scope of supply:
3 hard stepped block jaws

SBF 3

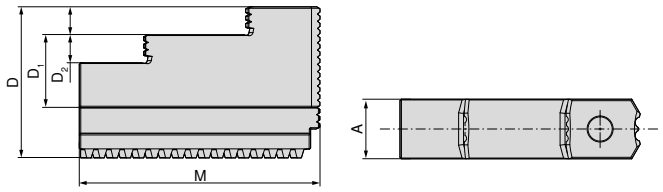



for	A mm	D mm	D_1 mm	D_2 mm	M mm	WT kg	80 913 ... EUR Y4	
SBF-3.200	22	60	35	10	94	1,9	420,00	**50100**
SBF-3.315	32	81	46	15	129	5,5	661,00	**60100**

Dimension table – Hard stepped top jaws (SB-H)



Hard stepped top jaws
steel 16MnCr5, case-hardened



Hard stepped top jaws
steel 16MnCr5, case-hardened

			Externall clamping range				Internal clamping range		
3-jaw chuck	System jaw		A_1	A_2	A_3	A_4	l_1	l_2	l_3
SBF-3.200	**80 913 50100**	SBF-3.SB-H.200.94.22.10	6–74	59–128	111–180	138–207	70–138	97–165	149–217
SBF-3.315	**80 913 60100**	SBF-3.SB-H.315.129.32.15	12–124	89–210	189–420	–	91–203	199–311	–

Manual machine vice

- handy, universal vice with large clamping range
- Stepped jaws with horizontal and vertical 120° prism
- Optional material stop can be used on both sides

HSG

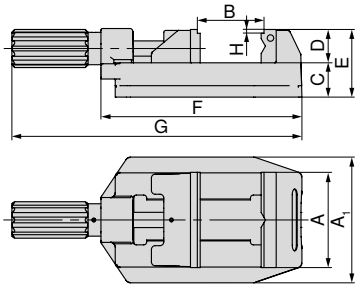

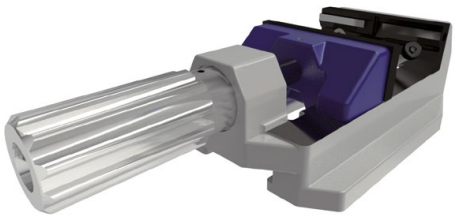

A	A1	B	C	D	E	F	G	H	WT	80 893 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	mm	mm	kg		
80	112	0 - 81	36	35	71	194	286,5	4	4,5	286,00	**080**
100	132	0 - 100	36	35	71	211	304,5	4	5,6	303,00	**100**
125	156	0 - 131	40	40	84	274	386	4	11,2	506,00	**125**

Manual machine vice with clamping aid

- Quick and accurate workpiece clamping using the clamping aid
- handy, universal vice with large clamping range
- Stepped jaws with horizontal and vertical 120° prism
- Optional material stop can be used on both sides
- N = Stroke with handle clamping

HSG



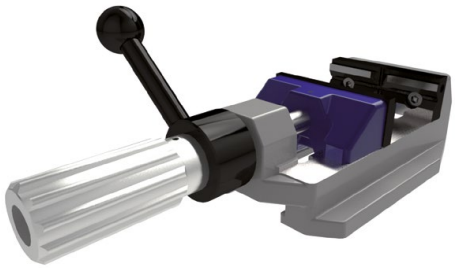

A	A1	B	C	D	E	F	G	H	N	WT	80 893 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg		
100	132	0 - 100	36	35	71	211	342	4	1,5	6,1	491,00	**101**
125	156	0 - 133	44	40	84	274	405	4	1,5	11,7	702,00	**126**

Vice guide

System accessories 132+133
General accessories 164–183

Top jaws overview

Stepped jaw, smooth

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	80		35	31			10,2	7,2		49,00	**80 893 082**											●
	100		35	31			10,2	7,2		45,00	**80 893 102**											●
	125		40	36			11,8	8,8		58,00	**80 893 127**											●

Stepped jaw, 17 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		40	23			11,5	9,5		123,00	**80 892 244**											●

Prismatic jaw

▲ Prism jaw with horizontal and vertical prism
▲ price per piece



For clamping diameter	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
9 - 31	80		35	31			15,8	12,8		58,00	**80 893 083**											●
9 - 31	100		35	31			15,8	12,8		74,00	**80 893 103**											●
11 - 41	125		40	36			17,8	14,8		129,00	**80 893 128**											●

→ **Page 164–173**
Here you will find other matching top jaws.

System accessories overview

Workpiece stop

▲ Fixed to the top section, either on the left, the right, or at both ends. The length adjustment can be performed quickly and accurately using a clamping screw.

HSG

for width mm	80 893 ... EUR Y4	
80/100/125	46,00	265

Guide rail

▲ Helps prevent accidents
▲ Prevents unwanted movement, lifting and dragging

HSG



for width mm	80 893 ... EUR Y4	
80/100/125	50,00	260

Clamping set

▲ A movable support with an eccentric swivel plate allows any clamping position to be adopted on machine tables with different T-slot arrangements. The inside slot of the vice body provides an additional fixing option, just as with the **80 893 260** guide rail.
▲ Price per Set

Scope of supply:
2 positioning clamps incl. clamping accessories.

HSG

for width mm	for slot width mm	80 893 ... EUR Y4	
80/100/125	12/14	132,00	250

Overview of MNG and PNG zero point clamping system

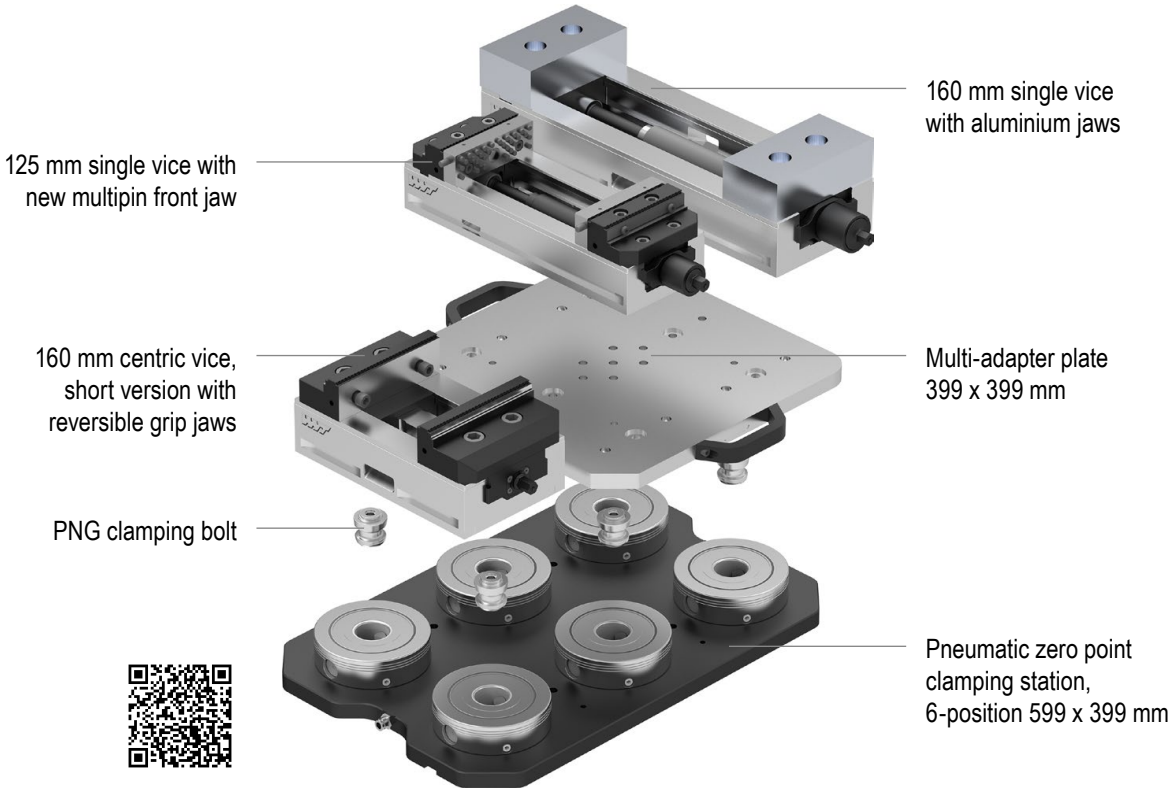

MNG – Base plate, round

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ hardened and ground
- ▲ Repeatability ≤ 0.01 mm
- ▲ Insertion force 20 kN
- ▲ Torque 30 Nm

MNG

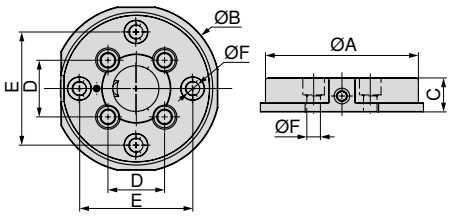

A mm	B mm	C ±0,005 mm	D mm	E mm	F H7 mm	WT kg	80 899 ... EUR Y4	
135	148	30	50	100	12	3,5	571,00	**125**

Vice guide

System accessories 144+145 General accessories 164–183

MNG – Base plate, rectangular

- MNG – Mechanical Zero-point Clamping System
- Insertion force 20 kN on the clamping bolt
- Stainless and vacuum-hardened
- Repeatability ≤ 0.01 mm
- Tightening torque 30 Nm

MNG

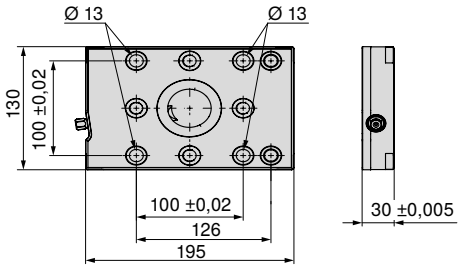

Size	WT kg	80 899 ... EUR Y4	
195x130 mm	5,2	702,00	**65000**

MNG – Base plate, rectangular 2-location

- MNG – Mechanical Zero-point Clamping System
- Insertion force 20 kN on the clamping bolt
- Stainless and vacuum-hardened
- Repeatability ≤ 0.01 mm
- Tightening torque 30 Nm

MNG

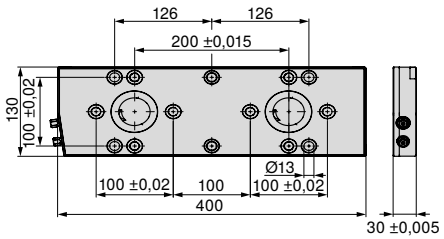

Size	WT kg	80 899 ... EUR Y4	
400x130 mm	11	1.650,00	**65100**

Vice guide

System accessories	144+145	General accessories	164–183
MNG clamping options	146–148		

MNG – Base plate, rectangular 3-location

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ Stainless and vacuum-hardened
- ▲ Repeatability ≤ 0.01 mm
- ▲ Tightening torque 30 Nm

MNG

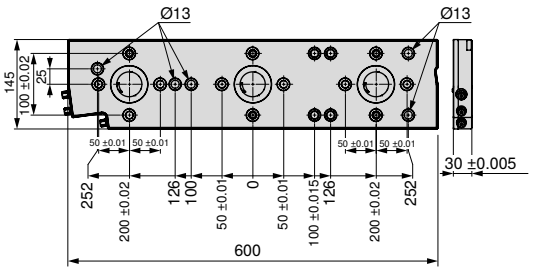

Size	WT kg	80 899 ... EUR Y4	
600x145 mm	18	2.340,00	**65200**

MNG – 3 location base plate, 270 x 190 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Clamping force 20 kN on each location bolt
- ▲ 4 x M12 mounting holes for T-slot nuts 50 mm spread
- ▲ 8 x dowel bushes Ø12 F7 / M12
- ▲ 4 x dowel holes Ø18 H7 for positioning

MNG

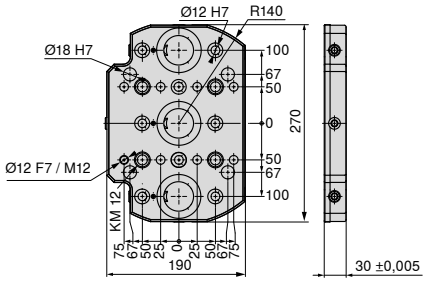

Size	WT kg	80 899 ... EUR Y4	
270x190 mm	9	2.110,00	**230**

Vice guide

System accessories	144+145	General accessories	164–183
MNG clamping options	146–148		

MNG – 4 location base plate, 330 x 400 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ 15 x mounting holes for M12, for T-slot spacing 50, 63, 100, 125 mm
- ▲ 13 x mating holes Ø12 F7/M12
- ▲ 2 x mating holes Ø18 G7 for positioning
- ▲ 1 x mating holes Ø12 F7 for positioning

MNG



Size	WT kg	80 899 ... EUR Y4	
330x400 mm	28	3.290,00	**63000**[1)]

1) Not ex-stock

MNG – 6 location base plate, 400 x 400 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ 14 x mounting holes for M16, for T-slot spacing 63, 80, 100, 125 mm
- ▲ 2 x mounting holes for M12
- ▲ 17 x mating holes Ø12 F7/M12
- ▲ 2 x mating holes Ø18 G7 for positioning
- ▲ 1 x mating holes Ø12 F7 for positioning

MNG

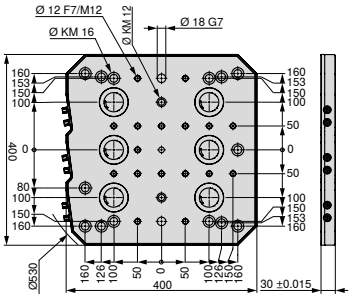

Size	WT kg	80 899 ... EUR Y4	
400x400 mm	33	4.510,00	**63100**[1)]

1) Not ex-stock

Vice guide

System accessories	144+145	General accessories	164–183

17

MNG – 6 location base plate, 400 x 530 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ 24 x mounting holes for M12, for T-slot spacing 63, 100, 125 mm
- ▲ 21 x mating holes Ø12 F7/M12
- ▲ 2 x mating holes Ø18 G7 for positioning
- ▲ 1 x mating holes Ø12 F7 for positioning

MNG



Size	WT kg	80 899 ... EUR Y4	
400x530 mm	45	4.880,00	**63200**[1)]

1) Not ex-stock

MNG – 10 location base plate, 496.5 x 532 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ 27 x mounting holes M12 for T-slot spacing 50, 63, 100, 125 mm and star slots 45°
- ▲ 20 x mating holes Ø12 F7/M12
- ▲ 2 x mating holes Ø18 G7 for positioning
- ▲ 1 x mating holes Ø12 F7 for positioning

MNG



Size	WT kg	80 899 ... EUR Y4	
497x532 mm	54	6.930,00	**63300**[1)]

1) Not ex-stock

Vice guide

System accessories 144+145 General accessories 164–183

MNG – Centering Pin

▲ MNG – Mechanical Zero-point Clamping System

MNG

$D_{1\ n6}$ mm	$D_{2\ h6}$ mm	80 899 ... EUR Y4	
12	30	74,00	**61700**
12	32	73,50	**61800**
12	50	39,00	**61900**

MNG – Alignment Pin

▲ MNG – Mechanical Zero-point Clamping System

MNG

$D_{1\ n6}$ mm	$D_{2\ h6}$ mm	80 899 ... EUR Y4	
18	14	46,50	**607**
18	18	46,50	**608**
18	20	61,50	**609**
18	22	61,50	**610**

MNG – Clamping Screw Set for T-slot

▲ MNG – Mechanical Zero-point Clamping System

Scope of supply:
Clamping screw and T-Nuts

MNG

for slot width mm	G	80 899 ... EUR Y4	
12	M8	31,10	**63800**
12	M10	11,50	**63400**
14	M8	31,10	**63900**
14	M12	13,80	**63500**[1)]
16	M8	31,10	**64000**
16	M12	13,80	**63600**[1)]
18	M8	31,10	**64100**
18	M12	13,80	**63700**[1)]

1) With low head screws

MNG – Console with zero point clamping module

▲ MNG – Mechanical Zero-point Clamping System
▲ universal application on all machine tables
▲ Clamping force 20 kN

Scope of supply:
Plate incl. MNG round clamping module

MNG

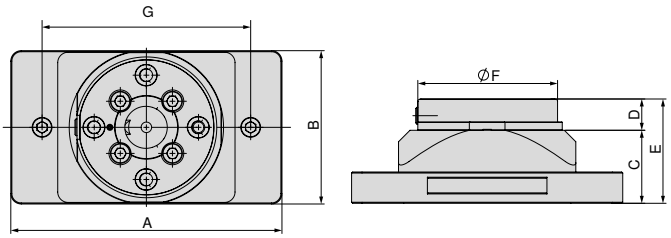

A	B	C	D	E	F	G	WT	80 899 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm	kg		
260	147	70	30	100	135	200	8,9	1.080,00	**425**

MNG – Console

▲ MNG – Mechanical Zero-point Clamping System
▲ universal application on all machine tables
▲ Material: Aluminum, hard anodized

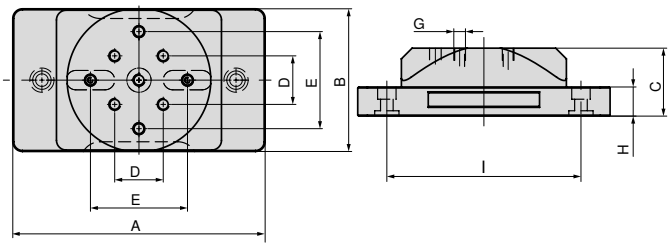

A	B	C	D	E ±0,02	G	H	I	WT	80 899 ... EUR Y4	
mm	mm	mm	mm	mm		mm	mm	kg		
260	147	70	50	100	M12	30	200	5,5	519,00	**420**

Vice guide

System accessories 144+145 General accessories 164–183

MNG – Double console with zero point clamping module

▲ MNG – Mechanical Zero-point Clamping System
▲ universally applicable on all machine tables
▲ Material: Aluminium Hard Anodised

Scope of supply:
Console including MNG round clamping module

MNG

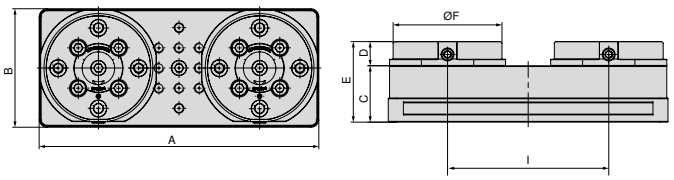

A mm	B mm	C mm	D mm	E mm	F mm	I mm	WT kg	80 899 ... EUR Y4	
347	147	70	30	100	135	200	16,5	1.950,00	**435**

MNG – Double console

▲ MNG – Mechanical Zero-point Clamping System
▲ universally applicable on all machine tables
▲ Material: Aluminium Hard Anodised

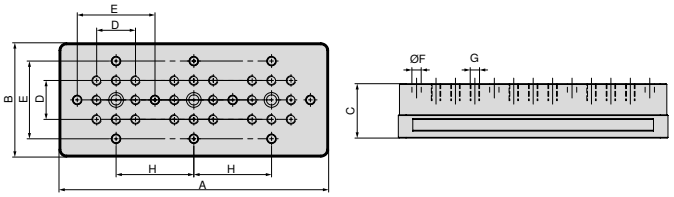

A mm	B mm	C mm	D mm	E ±0,02 mm	F F7 mm	G	H mm	WT kg	80 899 ... EUR Y4	
347	147	70	50	100	12	M12	100	9,3	709,00	**430**

Vice guide

System accessories 144+145
General accessories 164–183

MNG – Console with zero point clamping module

▲ MNG – Mechanical Zero-point Clamping System

MNG

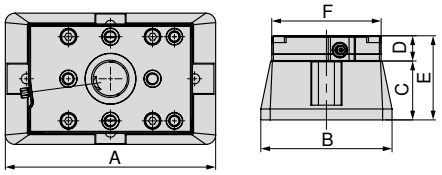

A	B	C	D	E	F	80 878 ... EUR Y4	
mm	mm	mm	mm	mm	mm		
250	156	70	30	100	130	1.300,00	**54000**

Console

▲ MNG – Mechanical Zero-point Clamping System

ZSG 4

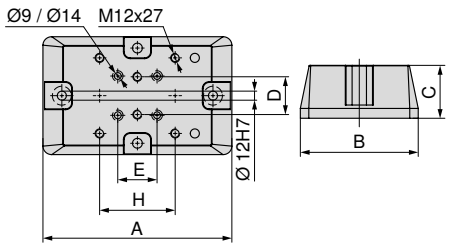

A	B	C	D	E	H	for	80 878 ... EUR Y4	
mm	mm	mm	mm	mm	mm			
250	156	70	50	52	100	ZSG 4 - 80 L = 130 mm + 190 mm / ZSG 4 - 125 L = 160 mm	573,00	**54100**
320	197	100	50	50	100	ZSG 4 - 160 L = 280 mm	903,00	**54400**
340	162	100	50	50	100	ZSG 4 - 125 L = 235 mm / 300 mm	900,00	**54300**

MNG – Assembly set for console

▲ MNG – Mechanical Zero-point Clamping System

for	80 878 ... EUR Y4	
ZSG-4.125/160.L235-L280	11,30	**54500**
ZSG-4.80.L130-L190	11,30	**54200**

Vice guide

System accessories 144+145 General accessories 164–183

MNG – Aluminum form chuck

▲ MNG – Mechanical Zero-point Clamping System
▲ for incorporation of forms for 2nd op machining

Scope of supply:
Collet with positioning pins, without locating bolts

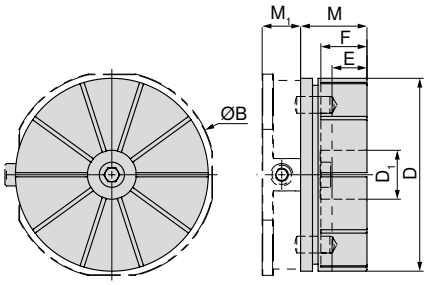

B	D	D_1	E	F	M	M_1	80 899 ... EUR Y4	
mm	mm	mm	mm	mm	mm	mm		
148	138	35	22	33	47,5	27,5	240,00	**500**

Machineable Alu chuck to suit round MNG

Machineable Alu chuck to suit round MNG with clamped workpiece

Available on request

Grid plate

Blank plate

The maximum cutting depth E is 22 mm

Adjustable ring for MNG form collet

MNG

80 899 ... EUR Y4	
58,30	**510**

Vice guide

System accessories 144+145
General accessories 164–183

17

MNG – Pull studs

▲ MNG – Mechanical Zero-point Clamping System

Scope of supply:
with clamping screws

MNG



$D_{6\ h6}$ mm	$D_{1\ h6}$ mm	M mm	M_1 mm	E mm	D mm	G	80 899 ... EUR Y4	
25	40	27	17	3	19	M12	48,60	**025**

MNG – Bungs

▲ MNG – Mechanical Zero-point Clamping System

MNG



D_1 mm	80 899 ... EUR Y4	
40	14,30	**040**

MNG – Dowel Set

▲ MNG – Mechanical Zero-point Clamping System
▲ for ESG mini 4V tower and direct workpiece clamping
▲ Price per 2 Pieces

MNG



$D_{1\ m6}$ mm	M mm	80 899 ... EUR Y4	
12	24	2,40	**120**

MNG – Sealing plug with O-ring

▲ MNG – Mechanical Zero-point Clamping System

MNG

G	80 899 ... EUR Y4	
M12	2,40	**126**

MNG – positioning pin set

▲ MNG – Mechanical Zero-point Clamping System
▲ for ESG mini and direct workpiece clamping
▲ Price per 2 Pieces

MNG



for width mm	D_1 mm	D_2 mm	80 899 ... EUR Y4	
65	12	8	34,70	**128**

MNG – indexing bolt

▲ MNG – Mechanical Zero-point Clamping System

MNG



D_1 mm	M mm	80 899 ... EUR Y4	
12	18	17,30	51500

MNG – Clamping Screw Set for T-slot

▲ MNG – Mechanical Zero-point Clamping System

Scope of supply:
Clamping screw and T-Nuts

MNG

for slot width mm	G	80 899 ... EUR Y4	
12	M8	31,10	63800
12	M10	11,50	63400
14	M8	31,10	63900
14	M12	13,80	63500 1)
16	M8	31,10	64000
16	M12	13,80	63600 1)
18	M8	31,10	64100
18	M12	13,80	63700 1)

1) With low head screws

MNG – Clamping set for 14 mm T-slot

▲ MNG – Mechanical Zero-point Clamping System
▲ T-nuts are modified for 63 mm slot pitch
▲ Price per 2 Pieces

MNG

for slot width mm	A mm	80 899 ... EUR Y4	
14	63	96,10	614

MNG – Alignment/centering set for T-slots

▲ MNG – Mechanical Zero-point Clamping System
▲ A = groove spacing

Scope of supply:
1 Terminal block, 2 T-nuts, 2 screws, 2 washers for width 12 mm, without clamping strip!

MNG

A mm	for slot width mm	80 899 ... EUR Y4	
50	12	71,30	012 1)
50	14	71,30	014
50	16	71,30	016
50	18	71,30	018
100	12	93,90	81200
100	14	93,90	81400
100	16	93,90	81600
100	18	93,90	81800

1) For 12 mm width excluding clamping strip

MNG – Round claw

▲ MNG – Mechanical Zero-point Clamping System
▲ Two pieces contained in set
▲ Price per 2 pieces

MNG

80 899 ... EUR Y4	
81,00	300

MNG – Replacement clamping unit

▲ MNG – Mechanical Zero-point Clamping System
▲ Three-part set
▲ for MNG round

MNG

	80 899 ... EUR Y4	
MNG	126,00	026

17

MNG clamping options

MNG – Base plate, rectangular

Mounting:

- 2 x M12 low head screws
- 1 x Alignment and centring set

→ **Page 148**
Here you will find the suitable screws.

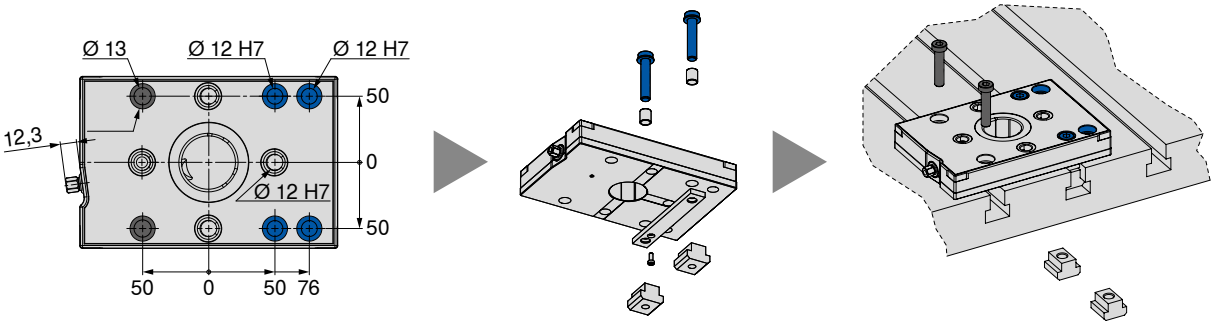

MNG – Base plate, rectangular 2-location

Mounting:

- 4 x M12 low head screws
- 1 x Alignment and centring set
- 4 x M8 MNG special screws

→ **Page 148**
Here you will find the suitable screws.

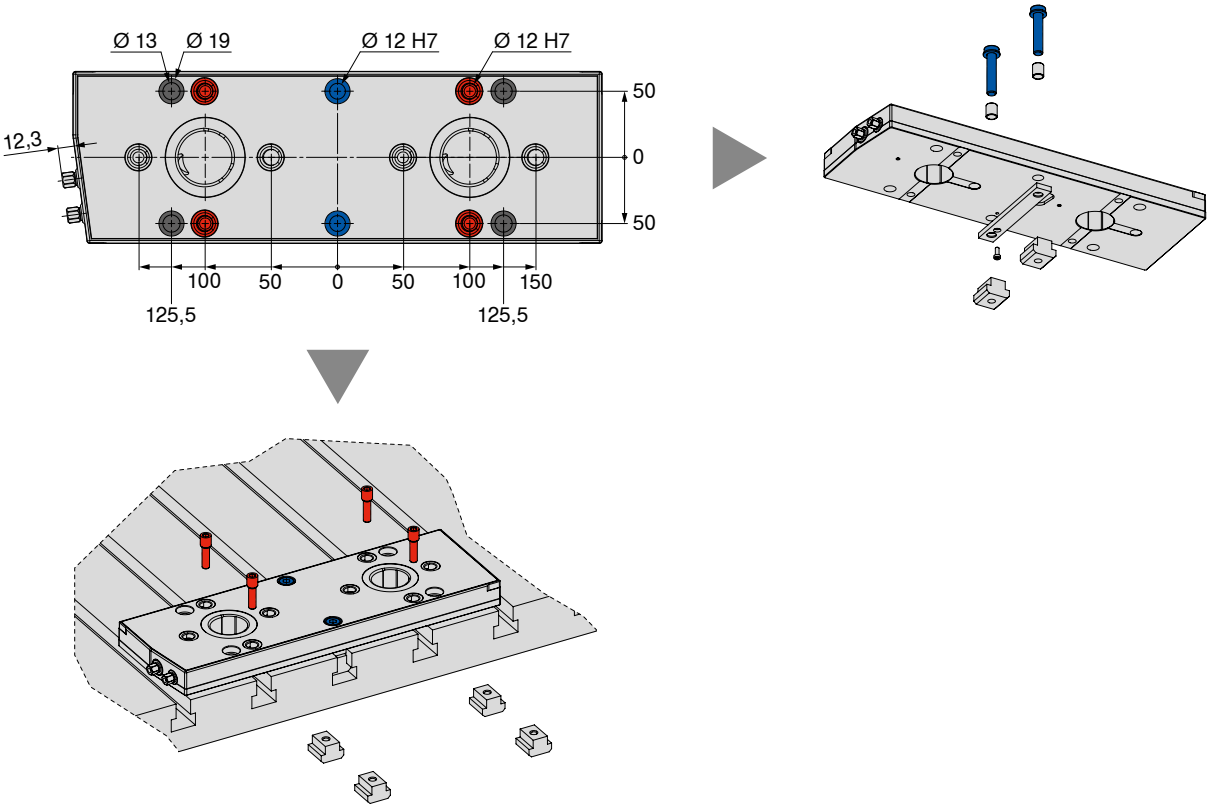

MNG clamping options

MNG – Base plate, rectangular 3-location

Mounting:

- 5 x M12 low head screws
- 1 x Alignment and centring set
- 5 x M8 MNG special screws

→ **Page 148**
Here you will find the suitable screws.

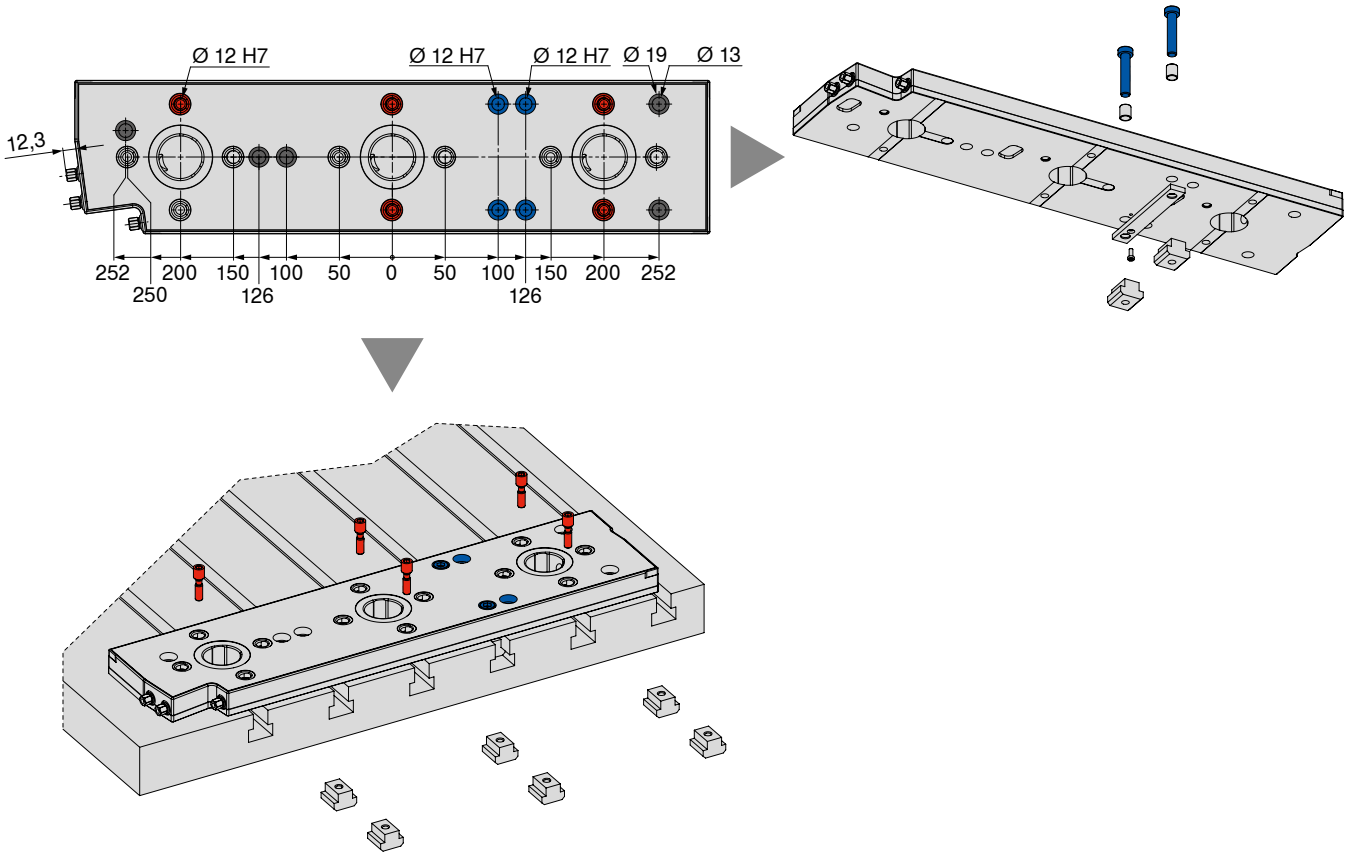

MNG clamping options

	T-slot table – spacing of 126 mm / 63 mm											
	12 mm			14 mm			16 mm			18 mm		
	● Alignment and centring set spacing 100 mm 80 899 81200	● Clamping set with M10 low head screws 80 899 63400	● Clamping set with M8 MNG special screws 80 899 63800	● Alignment and centring set spacing 100 mm 80 899 81400	● Clamping set with M12 low head screws 80 899 63500	● Clamping set with M8 MNG special screws 80 899 63900	● Alignment and centring set spacing 100 mm 80 899 81600	● Clamping set with M12 low head screws 80 899 63600	● Clamping set with M8 MNG special screws 80 899 64000	● Alignment and centring set spacing 100 mm 80 899 81800	● Clamping set with M12 low head screws 80 899 63700	● Clamping set with M8 MNG special screws 80 899 64100
MNG – Base plate, rectangular	1 x	2 x	––	1 x	2 x	––	1 x	2 x	––	1 x	2 x	––
MNG – Base plate, rectangular 2-location	1 x	4 x	––	1 x	4 x	––	1 x	4 x	––	1 x	4 x	––
MNG – Base plate, rectangular 3-location	1 x	4 x	2 x	1 x	4 x	2 x	1 x	4 x	2 x	1 x	4 x	2 x

	T-slot table – spacing of 100 mm / 50 mm											
	12 mm			14 mm			16 mm			18 mm		
	● Alignment and centring set spacing 100 mm 80 899 81200	● Clamping set with M10 low head screws 80 899 63400	● Clamping set with M8 MNG special screws 80 899 63800	● Alignment and centring set spacing 100 mm 80 899 81400	● Clamping set with M12 low head screws 80 899 63500	● Clamping set with M8 MNG special screws 80 899 63900	● Alignment and centring set spacing 100 mm 80 899 81600	● Clamping set with M12 low head screws 80 899 63600	● Clamping set with M8 MNG special screws 80 899 64000	● Alignment and centring set spacing 100 mm 80 899 81800	● Clamping set with M12 low head screws 80 899 63700	● Clamping set with M8 MNG special screws 80 899 64100
MNG – Base plate, rectangular	1 x	2 x	––	1 x	2 x	––	1 x	2 x	––	1 x	2 x	––
MNG – Base plate, rectangular 2-location	1 x	––	4 x	1 x	––	4 x	1 x	––	4 x	1 x	––	4 x
MNG – Base plate, rectangular 3-location	1 x	1 x	5 x	1 x	1 x	5 x	1 x	1 x	5 x	1 x	1 x	5 x



Alignment and centring set spacing 100 mm

Clamping set with M8 MNG special screws

Clamping set with M10 or M12 low head screws

M16 cylinder low head screw only base plate 6-face, 400 x 400 mm

Cylinder head screw for M12 grid holes

→ **Page 145**
→ **Page 182+183**
Here you will find the articles shown above.

MNG mini – Console

- ▲ With integrated MNG mini zero point clamping system
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

MNG mini

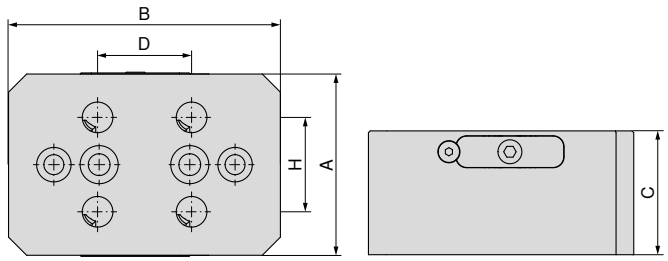

NEW

80 915 ...

A mm	B mm	C mm	D mm	H mm	EUR Y4	
100	150	70	52	52	770,00	**57000**

MNG mini – Three-sided pyramid

- ▲ Incl. 3 x MNG mini zero point clamping systems
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

MNG mini

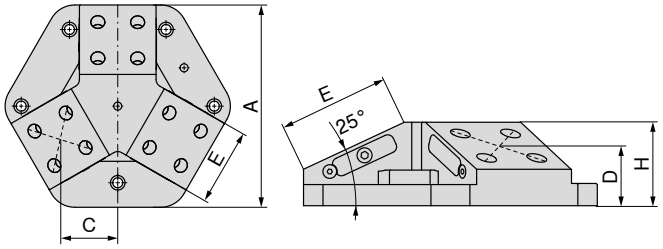

NEW

80 915 ...

A mm	C mm	D mm	E mm	H mm	EUR Y4	
264	86,68	53,87	100	75	1.980,00	**58000**

Suitable for: ESG 5 – 80 L-130 / ZSG 4 – 80 L-130 / ZSG mini – 70 L-80 / ZSG mini – 70 L-100

MNG mini underside dimensions

Console



A mm	B mm	$D_{6\ H7}$ mm	G_{H7} mm	H mm	I mm	$I_{1\ \pm0.015}$ mm	J mm	J_1 mm	J_2 mm	J_3 mm	$K_{\pm0.015}$ mm
100	150	25	12	52	50	66	11	17	13	19	100

Three-sided pyramid



A mm	$D_{6\ \pm0.015}$ mm	E mm	G_{H7} mm	I mm	$I_{1\ \pm0.015}$ mm	J_{H7} mm	$J_{1\ H7}$ mm	J_2 mm	J_3 mm	K mm	$N_{\pm0.015}$ mm
264	96	126	12	63	200	16	25	13	19	100	66

MNG mini – Four-sided pyramid

- Incl. 4 x MNG mini zero point clamping systems
- Order mounting bolts separately
- Material: hard-anodised aluminium

MNG mini

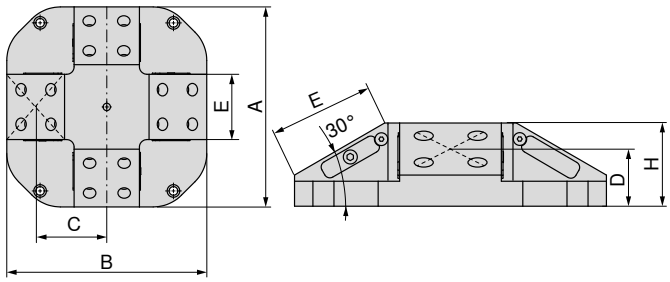

NEW

80 915 ...

A	B	C	D	E	H	EUR	
mm	mm	mm	mm	mm	mm	Y4	
300	300	106,7	55	100	80	2.390,00	**57500**

MNG mini – Triangular tombstone

- Incl. 3 x MNG mini zero point clamping systems
- Order mounting bolts separately
- Material: hard-anodised aluminium

MNG mini

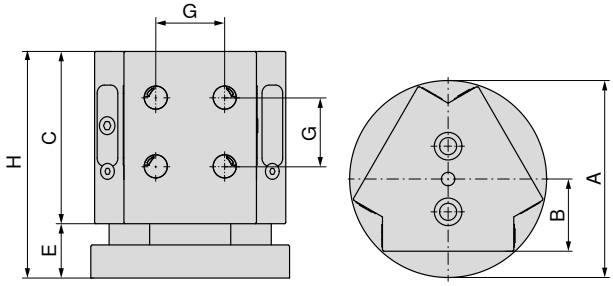

NEW

80 915 ...

A	B	C	E	G	H	EUR	
mm	mm	mm	mm	mm	mm	Y4	
148	55	130	41	52	171	1.490,00	**51700**

Suitable for: ESG 5 – 80 L-130 / ZSG 4 – 80 L-130 / ZSG mini – 70 L-80 / ZSG mini – 70 L-100

MNG mini underside dimensions



Four-sided pyramid

A	D_6 ±0.015	E	G_{H7}	I	I_1 ±0.015	J_{H7}	$J_{1\,H7}$	J_2	J_3	$K_{\pm 0.015}$	$N_{\pm 0.015}$
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
300	96	126	12	252	200	16	25	13	19	100	66



Triangular tombstone

A	D_6	G_{H7}	I ±0.015	$J_{1\,H7}$	J_2	J_3	$K_{\pm 0.015}$	$N_{\pm 0.015}$
mm	mm	mm	mm	mm	mm	mm	mm	mm
148	50	12	52	25	13	19	100	66

MNG mini mounting bolt set

Scope of supply:
Set contains four mounting bolts

MNG mini



NEW

$D_{1\ h6}$ mm	$D_{2\ h6}$ mm	M mm	G mm	TQX Nm	Clamping force kN	80 915 ... EUR Y4	
16	12	22	M8	18	15	67,00	**51600**

Clamping Screw Set for T-slot for MNG mini

Scope of supply:
Clamping screw and T-Nuts

MNG mini

NEW

for slot width mm	G	80 915 ... EUR Y4	
12	M10	16,70	**61200**
14	M12	16,70	**61400**
16	M12	17,90	**61600**
18	M12	19,00	**61800**

Alignment/centering set for T-slots

▲ MNG – Mechanical Zero-point Clamping System
▲ A = groove spacing

Scope of supply:
1 Terminal block, 2 T-nuts, 2 screws, 2 washers for width 12 mm, without clamping strip!

MNG mini

NEW

A mm	for slot width mm	80 915 ... EUR Y4	
100	12	90,70	**81200**
100	14	90,70	**81400**
100	16	90,70	**81600**
100	18	90,70	**81800**

1-position clamping station

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 8 kN
- ▲ Insertion force with turbo 28 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8

Scope of supply:

Clamping station, fixing clamps, sealing nipple, pneumatic plug connections, dust covers, operating instructions; without clamping bolt, without indexing bolt

PNG



A	B	C	E_{H7}	WT	80 809 ...
mm	mm	mm	mm	kg	EUR
					Y4
198	150	60	20	7	1.500,00 **01100**

2-position clamping station, 399 x 199 mm

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 16 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8

Scope of supply:

Clamping station, fixing clamps, sealing nipple, pneumatic plug connections, dust covers, operating instructions; without clamping bolt, without indexing bolt

PNG



A	B	C	E	G_{H7}	WT	80 809 ...
mm	mm	mm	mm	mm	kg	EUR
						Y4
399	199	60	200	25	16,9	2.400,00 **02100**

4-position clamping station, 399 x 399 mm

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 32 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8

Scope of supply:

Clamping station, fixing clamps, sealing nipple, pneumatic plug connections, dust covers, operating instructions; without clamping bolt, without indexing bolt

PNG

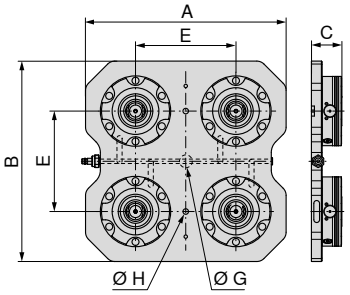

A	B	C	E	G_{H7}	H	WT	80 809 ...
mm	mm	mm	mm	mm	mm	kg	EUR
							Y4
399	399	60	200	25	11	35,7	4.630,00 **04100**

6-position clamping station, 599 x 399 mm

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 48 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8

Scope of supply:

Clamping station, fixing clamps, sealing nipple, pneumatic plug connections, dust covers, operating instructions; without clamping bolt, without indexing bolt

PNG

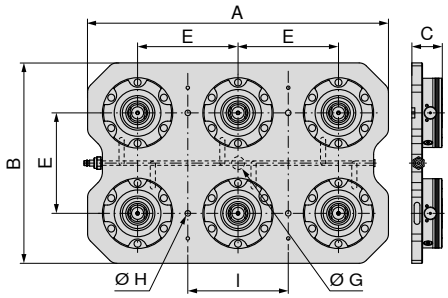

A	B	C	E	G_{H7}	H	I	WT	80 809 ...
mm	mm	mm	mm	mm	mm	mm	kg	EUR
								Y4
599	399	60	200	25	11	200	54,4	6.240,00 **06100**

PNG – Zero point clamping module PNG.SM.138

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 8 kN
- ▲ Insertion force with turbo 28 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8
- ▲ Repeatability 0.005

Scope of supply:
Clamping module, fixing screws, O-rings, cover caps, operating instructions; without clamping bolts

PNG

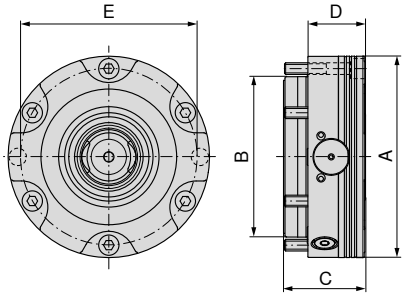



A mm	B mm	C mm	D mm	E mm	G	WT kg	80 809 ... EUR Y4	
138	110	55,7	39	121	G1/8"	4,4	954,00	**10100**

PNG – Zero point clamping system PNG.SM.T.138

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 7 kN
- ▲ Insertion force with turbo 24 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8
- ▲ Repeatability 0.005

Scope of supply:
Clamping module, fixing screws, O-rings, cover caps, operating instructions; without clamping bolts

PNG

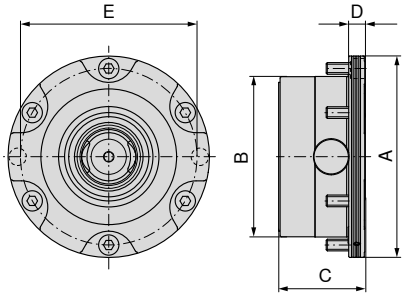



A mm	B mm	C mm	D mm	E mm	G	WT kg	80 809 ... EUR Y4	
138	110	59	11	121	G1/8"	3,5	1.040,00	**12100**

PNG – Zero point clamping module PNG.SM.V.138

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Insertion force 8 kN
- ▲ Insertion force with turbo 28 kN
- ▲ Unlocking pressure 6 bar
- ▲ Air connection G 1/8
- ▲ Repeatability 0.005

Scope of supply:

Clamping module, fixing screws, dowel screw, O-rings, cover caps, operating instructions; without clamping bolts, without indexing bolt

PNG

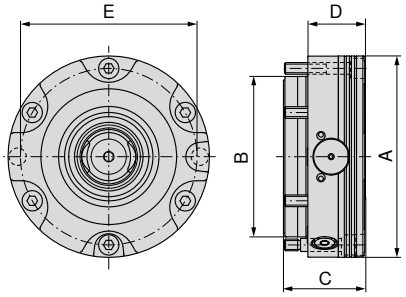

A mm	B mm	C mm	D mm	E mm	G	WT kg	80 809 ... EUR Y4	
138	110	55,7	39	121	G1/8"	4,4	1.020,00	**11100**

PNG – Aluminium form collet

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Max. clamping force 50 kN
- ▲ Repeatability 0.005
- ▲ Clamping stroke 0.5 mm
- ▲ Aluminium

Scope of supply:

Aluminium form collet, adjustment ring, clamping bolt, indexing bolt, operating instructions

PNG



A mm	WT kg	80 809 ... EUR Y4	
149	1,5	324,00	**07600**

PNG – indexing bolt

- ▲ PNG – Pneumatic zero point clamping system

PNG



$D_{1\ h5}$ mm	M mm	M_1 mm	$D_{6\ m6}$ mm	80 809 ... EUR Y4	
20	20	4	12	52,30	**073**

Assembly – Clamping bolts

The workpieces or devices being assembled are positioned and fixed with three different clamping bolts:

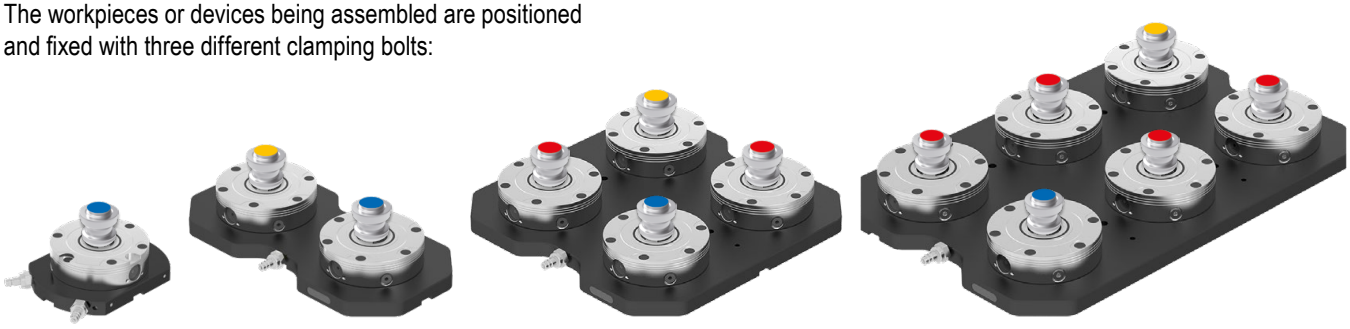

Centring bolt
Precision-ground, used to precisely position the clamping device.

Positioning bolt
This bolt, which is also known as a diamond bolt, is only ground in an axial direction so that the system is not overloaded.

Locking bolt
Ensures that the pallets lie flat on the clamping system. Ground smaller to short taper.

PNG – clamping bolt

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Three bolt types – ZB (centring bolt), PB (positioning bolt), HB (clamping bolt)
- ▲ Precision location bolts ensuring accuracy and repeatability
- ▲ Clamping force 50 kN

Scope of supply:
Incl. M10 fixing screw

PNG



Type	$D_{6\ H6}$ mm	$D_{1\ h6}$ mm	M mm	M_1 mm	E mm	G	80 809 ... EUR Y4	
ZB	25	40	35	27	5	M12	57,40	**070**
PB	25	40	35	27	5	M12	69,10	**071**
HB	25	40	35	27	5	M12	52,10	**072**

PNG – Cone seal

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Protective cover for the interchangeable interface

PNG



WT kg	80 809 ... EUR Y4	
0,11	121,00	**07500**

PNG – protective cover

- ▲ PNG – Pneumatic zero point clamping system
- ▲ Protective cover for the interchangeable interface

PNG



D_1 mm	G	80 809 ... EUR Y4	
138	M8	94,90	**074**

Overview of multi-adapter pallets

Multi-adapter pallet 159 x 159 mm

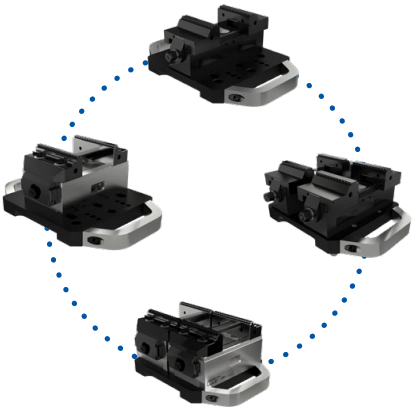

Application examples

Multi-adapter pallet 159 x 159 mm

▲ Multi-adapter pallet for mounting PNG and MNG

Scope of supply:
Incl. clamping bolts and screws
without pull studs



Size	WT kg	80 809 ... EUR Y4	
159x159 mm	4	502,00	**500**

Mounting set – multi-adapter pallet, 159 x 159 mm

▲ price per set

for	80 878 ... EUR Y4	
ZSG-4.80	17,30	**503**

Overview of multi-adapter pallets

Multi-adapter pallet 399 x 159 mm

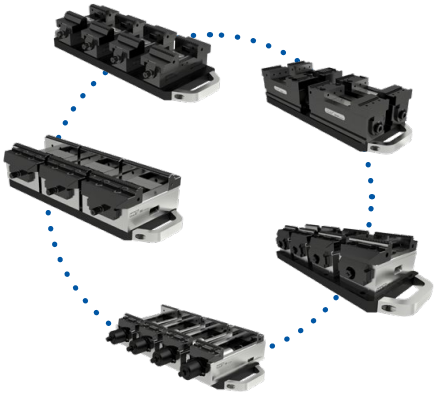

Application examples

Multi-adapter pallet 399 x 159 mm

▲ Multi-adapter pallet for mounting PNG and MNG

Scope of supply:

Incl. clamping bolts and screws
without pull studs



Size	WT kg	80 809 ... EUR Y4	
399x159 mm	10	737,00	**501**

Mounting set – multi-adapter pallet 399 x 159 mm

▲ price per set

for	80 884 ... EUR Y4	
ZSG-3.65/ZSG-4.80/125L160/ESG-4.80	39,00	**503**

Overview of multi-adapter pallets



Multi-adapter pallet 399 x 399 mm

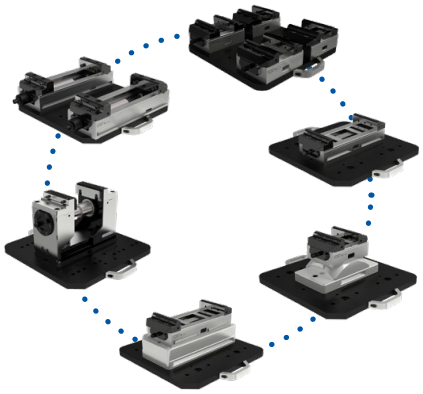

Application examples

Multi-adapter pallet 399 x 399 mm

▲ Multi-adapter pallet for mounting PNG and MNG

Scope of supply:
Incl. clamping bolts and screws
without pull studs

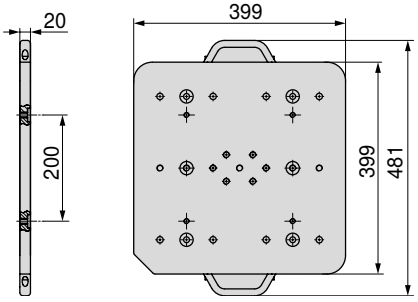



Size	WT kg	80 809 ... EUR Y4	
399x399 mm	25	1.380,00	**502**

Mounting set – multi-adapter pallet 399 x 399 mm

▲ price per set

for	80 901 ... EUR Y4		80 898 ... EUR Y4		80 878 ... EUR Y4	
ESG4.125	55,10	**500**				
H5G.125			55,10	**500**		
ZSG-4.125.L160					17,30	**500**
ZSG-4.125.L160.K					55,10	**502**
ZSG-4.125.L300					55,10	**501**
ZSG-4.125.L300-DK					55,10	**504**

17

Steel clamping pallet, 159 x 159 mm

▲ Clamping pallet for mounting PNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

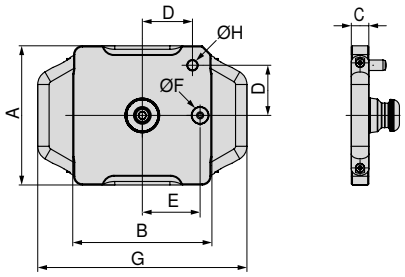

Size	A	B	C	D	E	F $_{H5}$	G	H $_{m6}$	WT	80 809 ...
	mm	mm	mm	mm	mm	mm	mm	mm	kg	EUR Y4
159x159 mm	159	159	20	58	66	20	239	12	4,2	333,00 **080**

Aluminium clamping pallet, 159 x 159 mm

▲ Clamping pallet for mounting PNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

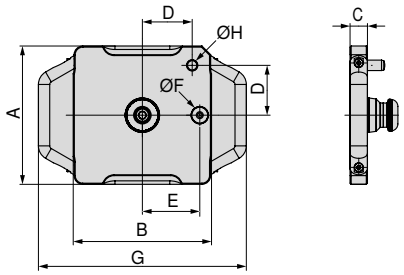

Size	A	B	C	D	E	F $_{h5}$	G	H $_{m6}$	WT	80 809 ...
	mm	mm	mm	mm	mm	mm	mm	mm	kg	EUR Y4
159x159 mm	159	159	25	58	66	20	239	12	2,2	376,00 **081**

Steel clamping pallet, 399 x 159 mm

▲ Clamping pallet for mounting PNG and MNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

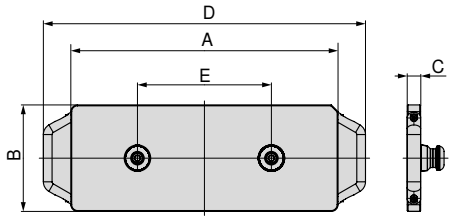

Size	A mm	B mm	C mm	D mm	E mm	WT kg	80 809 ... EUR Y4	
399x159 mm	399	159	20	481	200	10,6	668,00	**082**

Aluminium clamping pallet, 399 x 159 mm

▲ Clamping pallet for mounting PNG and MNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

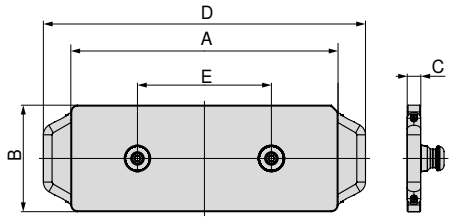

Size	A mm	B mm	C mm	D mm	E mm	WT kg	80 809 ... EUR Y4	
399x159 mm	399	159	25	481	200	5,1	584,00	**083**

Steel clamping pallet, 399 x 399 mm

▲ Clamping pallet for mounting PNG and MNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

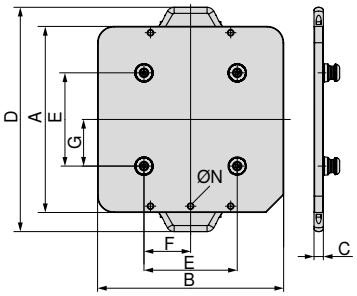

Size	A	B	C	D	E	F	G	N	WT	80 809 ... EUR Y4	
	mm	mm	mm	mm	mm	mm	mm		kg		
399x399 mm	399	399	20	481	200	100	100	M10	28	1.460,00	**084**

Aluminium clamping pallet, 399 x 399 mm

▲ Clamping pallet for mounting PNG and MNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

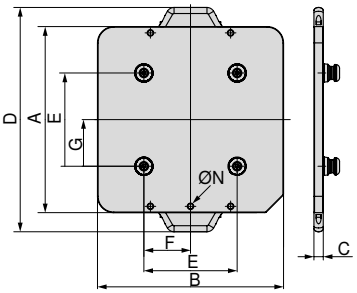

Size	A	B	C	D	E	F	G	N	WT	80 809 ... EUR Y4	
	mm	mm	mm	mm	mm	mm	mm		kg		
399x399 mm	399	399	25	481	200	100	100	M10	12	1.070,00	**085**

Steel clamping pallet, 599 x 159 mm

▲ Clamping pallet for mounting PNG and MNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

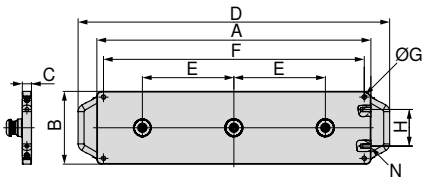

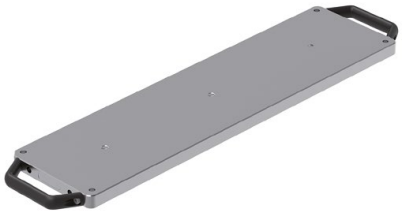

Size	A mm	B mm	C mm	D mm	E mm	F mm	G	H mm	N	WT kg	80 809 ... EUR Y4	
599x159 mm	599	159	20	681	200	570	M10	80	M10	15,6	936,00	**086**

Aluminium clamping pallet, 599 x 159 mm

▲ Clamping pallet for mounting PNG and MNG
▲ Without hole pattern

Scope of supply:
Unmachined clamping pallet, PNG clamping bolt and positioning pin

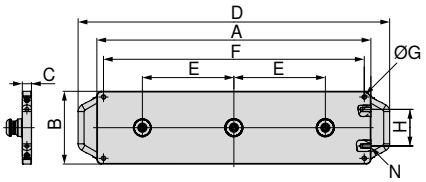

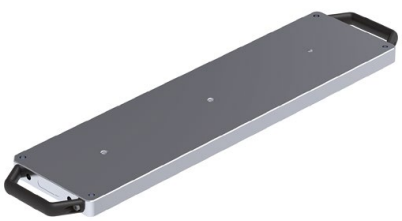

Size	A mm	B mm	C mm	D mm	E mm	F mm	G	H mm	N	WT kg	80 809 ... EUR Y4	
599x159 mm	599	159	25	681	200	570	M10	80	M10	7,4	1.020,00	**087**

General top jaws overview

6 function indexable jaw

- ▲ 1 = Smooth, carbide coated
- ▲ 2 = Grip with 3 mm step
- ▲ 3 = Grip with 8 mm step
- ▲ 4 = Grip with 18 mm step
- ▲ 5 = Rough grip with 8 mm step
- ▲ 6 = Round grip
- ▲ M_{max} = 60 Nm
- ▲ Including fixation screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							80,60	**80 892 246**	●	●	●	●			●		●	●	

6x indexable jaw, carbide grip

- ▲ 1 = Smooth
- ▲ 2 = Carbide grip
- ▲ 3 = Carbide grip with 3 mm step
- ▲ 4 = Carbide grip with 8 mm step
- ▲ 5 = Round carbide grip with 8 mm step
- ▲ 6 = Round carbide grip
- ▲ Incl. fixing screws





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18							117,00	**80 890 35300**	●	●	●	●		●		●	●		

Positioning bar

- ▲ for stepped jaw with T-slot
- ▲ different clamping depths achievable through milling
- ▲ by milling the bar can be used as stop strip
- ▲ Material 1.7131 can be hardened if required
- ▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		32				13,5	7		48,90	**80 892 338**	●					●					●
	125		32				13,5	7		51,30	**80 892 339**	●	●		●		●	●		●		●
	160		32				13,5	7		49,70	**80 892 340**	●			●		●	●				

General top jaws overview

Stepped jaw, grip with T-slot

- ▲ T-slot for accommodating a positioning bar
- ▲ with 6.5 mm wide contact surface suitable for workpieces with rough edges
- ▲ laser etched graduation marks (2 mm) as a positioning aid
- ▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	32			17,5	11,5		131,00	**80 892 341**	●					●					●
	100		35	30			17,5	11,5		131,00	**80 892 342**	●					●					●
	100		35	27			17,5	11,5		131,00	**80 892 343**	●					●					●
	125		40	37			17,5	11,5		142,00	**80 892 344**	●	●		●		●	●		●		●
	125		40	35			17,5	11,5		141,00	**80 892 345**	●	●		●		●	●		●		●
	125		40	32			17,5	11,5		141,00	**80 892 346**	●	●		●		●	●		●		●
	160		50	45			20	13,5		158,00	**80 892 348**	●			●		●	●				
	160		50	42			20	13,5		158,00	**80 892 349**	●			●		●	●				

Stepped jaw, smooth

- ▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	30			10	7,5		86,40	**80 892 21400**	●					●					●
	125		40	32			11,5	9,5		103,00	**80 892 21500**	●	●		●		●	●		●		●
	160		50	42			13,5	10,5		186,00	**80 892 21600**	●			●		●	●				

Stepped jaw, smooth

- ▲ Can be used as smooth or stepped jaw
- ▲ Jaw hardened and ground
- ▲ price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	65		22	19			8	5,5		72,40	**80 895 332**		●									

Stepped jaw, coated 5 mm

- ▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	80		28	23			10	7,5		156,00	**80 878 31400**				●			●		●		

17

General top jaws overview

Stepped jaw, coated 5 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	30			10	7,5		171,00	**80 892 36300**	●					●					
	125		40	35			11,5	9,5		151,00	**80 892 250**	●	●		●		●	●		●		●
	160		50	45			13,5	10,5		213,00	**80 892 36400**	●			●		●	●				

Stepped jaw, 5 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	80		28	23			10	7,5		128,00	**80 878 830**				●			●		●		

Stepped jaw, Grip

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		18	13			8	5,5		135,00	**80 898 252**		●		●					●		
	125		18	15			8	5,5		135,00	**80 898 250**		●		●					●		

Stepped jaw, grip, 3 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	80		28	25			10	7		91,70	**80 906 30900**				●			●		●		

General top jaws overview

Stepped jaw, grip 3, 5 and 8 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	27			10	7,5		108,00	**80 892 29200**	●					●					●
	100		35	30			10	7,5		108,00	**80 892 29000**	●					●					●
	100		35	32			10	7,5		108,00	**80 892 29400**	●					●					●
	125		40	32			11,5	9		124,00	**80 892 29300**	●	●		●		●	●		●		●
	125		40	35			11,5	9		124,00	**80 892 29100**	●	●		●		●	●		●		●
	125		40	37			11,5	9		124,00	**80 892 29500**	●	●		●		●	●		●		●
	160		50	42			13,5	11		138,00	**80 892 29900**	●			●		●	●				
	160		50	45			13,5	11		138,00	**80 892 29800**	●			●		●	●				
	160		50	47			13,5	11		138,00	**80 892 29700**	●			●		●	●				

Stepped jaw, carbide grip 3 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	32			7,5			156,00	**80 892 37600**	●	●		●		●	●		●		
	125		40	37			11,5			171,00	**80 892 36500**	●	●		●		●	●		●		
	160		50	47			13,5			195,00	**80 892 37400**	●	●		●		●	●		●		

Stepped jaw, carbide grip 5 mm

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	30			12			156,00	**80 892 37700**	●	●		●		●	●		●		
	125		40	35			13,5			171,00	**80 892 37500**	●	●		●		●	●		●		
	160		50	45			15,5			195,00	**80 892 37300**	●	●		●		●	●		●		

Stepped jaw, 18 mm with 3 mm Grip Step

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		40	22			21,5			222,00	**80 892 288**	●	●		●		●	●		●		●

General top jaws overview

Stepped jaw, 18 mm with 3 mm grip step

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		40	37	22		24	19		235,00	**80 907 302**	●	●		●		●	●		●		●

Stepped jaw, grip 5 mm for aluminium and plastic

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		40	35			11,5	8		143,00	**80 892 36100**	●	●		●		●	●		●		

Stepped jaw embossed profile

▲ Price per piece
▲ suitable for LANG embossed profile





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		40	37			11,5			138,00	**80 892 36200**	●	●		●		●	●		●		

Jaw, grip

▲ Price per piece



Illustration	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
A	40		22	7			7,8			33,50	**80 892 279**										●	
A	65		22	7			7,8			37,80	**80 892 280**										●	
A	90		22	7			7,8			41,00	**80 892 284**										●	
B	100		35	12			10			51,90	**80 892 21700**	●					●					●
B	125		40	14,5			11,5			60,50	**80 892 21800**	●			●		●			●		●
B	160		50	14,5			13,5			83,20	**80 892 21900**	●			●		●	●				

General top jaws overview

Top jaw, grip

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		18				7,8			66,90	**80 898 253**	●	●		●					●		

Ground top jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	40		22				7,7			33,50	**80 889 401**										●	
	40		35				10			37,80	**80 889 405**										●	
	65		22				7,7			37,80	**80 889 651**										●	
	65		35				10			41,00	**80 889 655**										●	
	90		22				7,7			41,00	**80 889 901**										●	
	90		35				10			49,70	**80 889 905**										●	

Ground top jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		18				7,6			50,80	**80 898 251**	●	●		●					●		

Top jaw, carbide coated

▲ with carbide coating
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		18				7,6			102,00	**80 898 254**	●	●		●					●		

General top jaws overview

Smooth jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35				10			40,00	**80 892 20400**	●					●					●
	125		40				11,5			48,60	**80 892 20500**	●			●		●	●		●		●
	160		50				13,5			74,70	**80 892 20600**	●			●		●	●				

Jaw, profiled

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35				10			45,40	**80 892 20700**	●					●					●
	125		40				11,5			55,10	**80 892 20800**	●			●		●	●		●		●
	160		50				13,5			90,60	**80 892 20900**	●			●		●	●				

Grip jaw, indexable

▲ For vertical and horizontal application
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	65		8	5,5	5		22	19		36,80	**80 895 340**		●					●				
	100		10,5	8	5		35	32		51,90	**80 895 343**	●					●					●

Grip jaw, indexable

▲ For vertical and horizontal application
▲ 3 point clamping
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
65	22		22	19			8	5,5		19,50	**80 895 335**		●					●				
100	35		35	32			10,5	8		31,40	**80 895 345**	●					●					

General top jaws overview

Jaw, cut

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35				11			54,00	**80 892 20100**	●					●					●
	125		40				12,5			65,90	**80 892 20200**	●			●		●	●		●		●
	160		50				14,5			76,60	**80 892 20300**	●			●		●	●				

Jaw, cut

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	40		35				11			37,80	**80 889 408**										●	
	40		22				8			33,50	**80 889 404**										●	
	65		35				11			41,00	**80 889 658**										●	
	65		22				8			37,80	**80 889 654**										●	
	90		35				11			49,70	**80 889 908**										●	
	90		22				8			41,00	**80 889 904**										●	

Soft jaw, steel

▲ Material: 16MnCr5
▲ Only for vertical application
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	40		22				20			33,50	**80 895 244**										●	
	65		22				20			37,80	**80 895 245**		●		●			●			●	
	90		22				20			41,00	**80 895 246**										●	

Soft jaw, steel

▲ Material: 14NiCr14
▲ for the preparation of formed jaws
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35				16			43,20	**80 892 24700**	●					●					●
	125		40				20			50,80	**80 892 24800**	●	●		●		●	●		●		●
	160		50				20			83,40	**80 892 24900**	●			●		●	●				

General top jaws overview

Prismatic jaw

▲ with horizontal and vertical prism
▲ prism horizontally and vertically ground for parallelism
▲ Price per piece



For clamping diameter	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
11 - 41	100		35	13			15,5			128,40	**80 892 26100**	●					●					●
14 - 48	125		40	16			17,5			142,90	**80 892 26200**	●	●		●		●	●		●		●
16 - 60	160		50	20			19,5			214,00	**80 892 26300**	●			●		●	●				

Prismatic jaw

▲ with horizontal and vertical prism
▲ price per piece



For clamping diameter	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
11 - 22	65		22	11			15			131,00	**80 895 337**		●					●				

Precision pull down jaw

▲ Pull down jaw is only for use on the movable jaw
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35				25			259,00	**80 892 370**	●										●
	125		40				25			268,00	**80 892 371**	●	●		●		●	●		●		●
	160		50				27,5			409,00	**80 892 372**	●			●		●	●				

Adapter jaws with pull down

▲ for the types NCG, NCG2, and HDG2
▲ with reciprocal pull down feather/spring jaws
▲ price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	28			28	45		289,00	**80 892 258**	●										
	125		40	32,5			20	35		283,00	**80 892 259**	●					●					
	160		50	42			20	35		337,00	**80 892 260**	●					●					

General top jaws overview

Multipin front jaw

▲ Price per piece

NCG | HDG 2

A mm	D mm	80 890 ... EUR Y4	
125	40	315,00	30200

Pull down jaw with spring plate

▲ for finish machining
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	80		24							66,90	80 901 309				●			●		●		
	125		35							87,40	80 901 310				●			●		●		
	160		45							99,30	80 901 311				●			●				

Pull down jaw with spring plate

▲ for finish machining
▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	65		23							57,30	80 898 923											
	100		36							73,40	80 898 924	●					●					●
	125		41							87,40	80 898 925	●					●					●
	160		51							99,30	80 898 926	●					●					

Spring leaf pull down jaw

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		35	28			10	18,5		59,50	80 892 22800	●					●					●
	125		40	32,5			11,5	19		69,10	80 892 22900	●			●		●	●		●		●
	160		50	42			13,5	21		89,60	80 892 23000	●			●		●	●				

17

Workpiece supports overview

Workpiece supports, offset

▲ hardened and ground
▲ held by means of spring wedge in the baseplate
▲ Price for 2 pieces



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		16				10,5			135,00	**80 890 401**	●										
	100		11				10,5			135,00	**80 890 400**	●										
	100		23				10,5			135,00	**80 890 409**	●										
	100		25,5				10,5			135,00	**80 890 411**	●										
	100		29,5				10,5			135,00	**80 890 421**	●										
	125		32,5				10,5			157,00	**80 890 395**	●										
	125		11				10,5			157,00	**80 890 390**	●										
	125		16				10,5			157,00	**80 890 391**	●										
	125		21				10,5			157,00	**80 890 392**	●										
	125		26				10,5			157,00	**80 890 393**	●										
	125		29				10,5			157,00	**80 890 394**	●										
	125		36				10,5			157,00	**80 890 396**	●										
	125		25				10,5			157,00	**80 890 422**	●										
	160		39				10,5			200,00	**80 890 454**	●										
	160		26				10,5			190,00	**80 890 452**	●										
	160		42,5				10,5			214,00	**80 890 456**	●										

For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125						10,5			1.030,00	**80 890 399**	●										

80 890 399: Set of 7 workpiece supports of 2 pieces in a wooden box (exclusive **80 890 422**)

Workpiece supports, offset

▲ Hardened and ground
▲ Held by means of clamping springs in the base plate
▲ 2 pieces contained in set
▲ Price per set



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		11				10,5			153,00	**80 901 703**				●							
	125		21				10,5			157,00	**80 901 704**				●							
	125		25				10,5			153,00	**80 901 705**				●							
	160		26				10,5			186,00	**80 901 700**				●							
	125		32,5				10,5			153,00	**80 901 706**				●							
	160		39				10,5			196,00	**80 901 701**				●							
	160		42,5				10,5			210,00	**80 901 702**				●							

Workpiece supports, offset

▲ Hardened and ground
▲ Held by means of clamping springs in the base plate
▲ Two pieces contained in set
▲ Price per set



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	80		15				10,5			127,00	**80 901 707**				●							
	80		20				10,5			127,00	**80 901 708**				●							

Workpiece supports overview

Workpiece supports, offset

- ▲ Hardened and ground
- ▲ Held by means of clamping springs in the base plate
- ▲ Two pieces contained in set
- ▲ Price per set



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125		15				10,5			157,00	**80 906 715**									●		
	125		22				10,5			157,00	**80 906 722**									●		
	125		25				10,5			157,00	**80 906 725**									●		
	125		32,5				10,5			157,00	**80 906 732**									●		

Workpiece supports

- ▲ hardened and ground
- ▲ held by spring clips in the baseplate
- ▲ Price for 2 pieces



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	100		16				10,5			131,00	**80 892 401**						●					
	100		25,5				10,5			131,00	**80 892 411**						●					
	100		29,5				10,5			131,00	**80 892 421**						●					
	125		11				10,5			157,00	**80 892 390**						●					
	125		16				10,5			157,00	**80 892 391**						●					
	125		21				10,5			157,00	**80 892 392**						●					
	125		26				10,5			157,00	**80 892 393**						●					
	125		29				10,5			157,00	**80 892 394**						●					
	125		32,5				10,5			157,00	**80 892 395**						●					
	125		36				10,5			157,00	**80 892 396**						●					
	160		26				10,5			190,00	**80 892 403**						●					
	160		39				10,5			200,00	**80 892 413**						●					
	160		42,5				10,5			214,00	**80 892 423**						●					

For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
	125						10,5			1.030,00	**80 892 399**						●					

80 892 399: Set of 7 workpiece supports of 2 pieces in a wooden box

Magnet workpiece supports, set

- With clearance on the underside
- Flexible and rational clamping
- Height accuracy +/- 0.01 mm
- Quick and easy to install thanks to magnetic adhesion

Workpiece supports overview

Magnet workpiece supports, set

- Stainless spring steel
- Pressed magnets
- Delivered in set: 5 pairs of 2 pieces
- Price per set

A	D	M	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	5 / 10 / 15 / 20 / 22	2,5	297,00	**80 878 79800**			●	●			●		●		
125	8 / 12 / 15 / 20 / 22	2,5	334,00	**80 878 79700**	●		●	●		●	●		●		
125	8 / 12 / 20 / 25 / 27	2,5	334,00	**80 878 79900**	●		●	●		●	●		●		

Magnet workpiece supports, set

- Stainless spring steel
- Pressed magnets
- Delivered in set: 5 pairs of 2 pieces
- Price per set

A	D	M	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
100	12 / 20 / 25 / 30 / 32	2,5	325,00	**80 892 79700**	●		●			●	●				
125	12 / 25 / 30 / 35 / 37	2,5	342,00	**80 892 79800**	●		●			●	●		●		
160	15 / 30 / 40 / 45 / 47	2,5	360,00	**80 892 79900**	●		●	●		●	●				

Magnet workpiece supports, set

- Stainless spring steel
- Pressed magnets
- Delivered in set: 5 pairs of 2 pieces
- Price per set

A	D	M	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
125	9 / 22 / 27 / 32 / 34	2,5	334,00	**80 901 79900**	●		●			●	●		●		

Workpiece supports overview

Magnet workpiece supports

▲ Price per pair



A	D	M	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
80	5	2,5	68,00	**80 892 79600**			●	●			●		●		
80	10	2,5	68,00	**80 892 79500**	●		●	●		●	●		●		
80	15	2,5	68,00	**80 892 79400**			●	●			●		●		
80	20	2,5	68,00	**80 892 79300**			●	●		●	●		●		
80	22	2,5	68,00	**80 892 79200**			●	●			●		●		
100	12	2,5	71,30	**80 892 79100**	●		●			●	●				
100	20	2,5	71,30	**80 892 79000**	●		●			●	●				
100	25	2,5	71,30	**80 892 78900**	●		●			●	●				
100	27	2,5	71,30	**80 892 78800**	●		●			●	●				
100	29	2,5	71,30	**80 892 78700**	●		●			●	●				
100	30	2,5	71,30	**80 892 78600**	●		●			●	●				
100	31	2,5	71,30	**80 892 78500**	●		●			●	●				
100	32	2,5	71,30	**80 892 78400**	●		●			●	●				
125	8	2,5	74,50	**80 892 78300**	●		●			●	●		●		
125	9	2,5	74,50	**80 892 78200**	●		●			●	●		●		
125	10	2,5	74,50	**80 892 78100**	●		●			●	●		●		
125	12	2,5	74,50	**80 892 78000**	●		●			●	●		●		
125	15	2,5	74,50	**80 892 77900**	●		●			●	●		●		
125	20	2,5	74,50	**80 892 77800**	●		●			●	●		●		
125	22	2,5	74,50	**80 892 77700**	●		●			●	●		●		
125	23	2,5	74,50	**80 892 77600**	●		●			●	●		●		
125	25	2,5	74,50	**80 892 77500**	●		●			●	●		●		
125	27	2,5	74,50	**80 892 77400**	●		●			●	●		●		
125	30	2,5	74,50	**80 892 77300**	●		●			●	●		●		
125	31	2,5	74,50	**80 892 77200**	●		●			●	●		●		
125	32	2,5	74,50	**80 892 77100**	●		●			●	●		●		
125	33	2,5	74,50	**80 892 77000**	●		●			●	●		●		
125	34	2,5	74,50	**80 892 76900**	●		●			●	●		●		
125	35	2,5	74,50	**80 892 76800**	●		●			●	●		●		
125	36	2,5	74,50	**80 892 76700**	●		●			●	●		●		
125	37	2,5	74,50	**80 892 76600**	●		●			●	●		●		
160	15	2,5	81,00	**80 892 76500**	●		●			●	●				
160	22	2,5	81,00	**80 892 76400**	●		●			●	●				
160	30	2,5	81,00	**80 892 76300**	●		●			●	●				
160	37	2,5	81,00	**80 892 76200**	●		●			●	●				
160	40	2,5	81,00	**80 892 76100**	●		●			●	●				
160	41	2,5	81,00	**80 892 76000**	●		●			●	●				
160	42	2,5	81,00	**80 892 75900**	●		●			●	●				
160	43	2,5	81,00	**80 892 75800**	●		●			●	●				
160	44	2,5	81,00	**80 892 75700**	●		●			●	●				
160	45	2,5	82,00	**80 892 75600**	●		●			●	●				
160	46	2,5	81,00	**80 892 75500**	●		●			●	●				
160	47	2,5	81,00	**80 892 75400**	●		●			●	●				

Workpiece support, magnetic

Scope of supply:
Including stop pin 50 mm/100 mm

for width mm	Size	EUR Y4	80 892 ...
80/100/125/160	60x15	113,00	**23800**
80/100/125/160	115x15	164,00	**23900**

Extension for workpiece support, magnetic



for width mm	Size	EUR Y4	80 892 ...
80/100/125/160	68x30 mm	87,40	**25400**

17

Accessories General Overview

Alignment and centering kit for T-slots

▲ Price per piece

H5G -Z | ESG 4 | DSG 4

l mm	for slot width mm	80 897 ... EUR Y4	
100	14	57,10	114
100	16	57,10	116
100	18	57,10	118

Alignment and centring set

▲ Price per piece

ESG 4 | DSG 4

l mm	for slot width mm	80 906 ... EUR Y4	
80	12	59,50	812
80	14	59,50	814
80	16	59,50	816
80	18	59,50	818

Clamping Screw Set for T-slot for MNG

▲ Price for 2 pieces

ESG 4 | ZSG 4 | DSG 4

for width mm	G	80 899 ... EUR Y4	
12	M10	15,20	312
14	M12	15,20	314
16	M12	20,50	316
18	M12	26,00	318

Workpiece stop

NCG | H5G | HDG 2 | DSG 4 | ESG 4 | ZSG 4

80 892 ... EUR Y4: 81,70 | 400

Workpiece stop

ESG 4 | ZSG 4 | DSG 4

80 895 ... EUR Y4: 44,80 | 010

Workpiece stop

ESG 4 | ZSG 4

80 884 ... EUR Y4: 43,70 | 400

Accessories General Overview

Replacement spring plates

▲ price per piece
▲ for pull down and intermediate jaws



for width mm	80 892 ... EUR Y4	
100	23,90	430
125	24,90	431
160	27,10	432

Clamping claws

▲ Price for 2 pieces



D mm	D_6 mm	M mm	M_1 mm	80 890 ... EUR Y4	
20	16	50	57	38,10	315

Clamping levers overview

Clamping Handle with Joint

▲ without socket

Torque in Nm	Square drive	DRVS	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	1/2"		76,10	**80 891 600**				●			●						

Torque Wrench

▲ without socket

Torque in Nm	Square drive	DRVS	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
10 - 100	1/2"		280,00	**80 884 502**				●		●	●	●	●				
20 - 200	1/2"		280,00	**80 884 504**			●	●		●	●	●					

Torque key

▲ without socket

Torque in Nm	Square drive	DRVS	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
5 - 50	3/8"		280,00	**80 884 402**								●		●		●	

Control set

▲ Torque key incl. socket, screwdriver A/F10 and 1/2" extension

Torque in Nm	Square drive	DRVS	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
8 - 50	3/8"	10	329,00	**80 899 410**												●	

Clamping levers overview

Socket

▲ Suitable for 1/2" or 3/8" square drive

Torque in Nm	Square drive	DRVS	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	3/8"	5	18,20	**80 877 105**													
	3/8"	6	18,20	**80 877 10600**													●
	3/8"	8	18,20	**80 877 108**										●		●	
	1/2"	8	18,20	**80 877 208**													
	1/2"	10	18,20	**80 877 210**													
	1/2"	14	18,20	**80 877 214**			●										

Socket

▲ Suitable for 1/2" or 3/8" square drive

Torque in Nm	Square drive	DRVS	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	3/8"	7	18,20	**80 875 107**													
	3/8"	11	18,20	**80 875 11100**								●					
	3/8"	12	18,20	**80 875 112**				●			●		●				
	1/2"	12	18,20	**80 875 212**				●			●		●				
	1/2"	14	18,20	**80 875 214**				●			●		●				

Screws Overview

Clamping screw for top jaws

▲ DIN EN ISO 4762 (1998-02)

For vice width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	M8x12		1,20	**80 892 296**	●	●				●	●						
	M6x8		1,20	**80 895 013**								●		●			

Clamping screw with shallow head for top jaws

▲ see DIN7984 (1985-05)

For vice width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	M8x10		1,20	**80 889 950**	●	●				●	●						

Clamping screw for system jaws

▲ Price per piece

For vice width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	M12x20		1,20	**80 890 630**	●	●											
	M12x40		2,30	**80 890 632**	●	●											

Allen cap screw

▲ DIN 912

For vice width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
	M12x45		2,30	**80 899 124**												●	

Dowel screws

▲ Price for 2 pieces

For vice width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
100	M12x38	12	45,70	**80 890 313**	●			●									
125 / 160	M16x55	16	60,80	**80 890 314**	●												

Screws Overview

Dowel screw

▲ Price for 2 pieces

For vice width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
125	M12x45	12	26,20	**80 895 019**		●	●	●			●		●			●	

Clamping screw and T-Nuts

▲ For mounting the clamping claw
▲ Price per 2 pieces

For slot width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
12	M10		24,30	**80 890 308**	●	●		●		●	●		●	●			
14	M12		24,30	**80 890 309**	●	●		●		●	●		●	●			
16	M14		25,20	**80 890 310**	●	●		●		●	●		●	●			
18	M16		26,30	**80 890 311**	●	●		●		●	●		●	●			

Clamping screws for round clamps, T-Nut

▲ incl. nut and washer
▲ Price per 2 Pieces

For slot width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG	MNG	MNG mini
12	M10		15,80	**80 899 112**										●		●	
14	M12		15,80	**80 899 114**										●		●	
16	M12		17,30	**80 899 116**										●		●	
18	M12		18,50	**80 899 118**										●		●	

Tenon incl. screw

▲ Price per 2 pieces

For slot width	G	J_{17}	EUR	Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG2	ZSG 4	ZSG mini	DSG4	Verso	HSG	MNG	MNG mini
12	M6		91,20	**80 898 412**	●	●		●		●			●				
14	M6		91,20	**80 898 414**	●	●		●		●			●				
16	M6		91,20	**80 898 416**	●	●		●		●			●				
18	M6		91,20	**80 898 418**	●	●		●		●			●				

17

Solid drilling and bore machining

1 HSS drilling

2 Solid carbide drilling

3 Indexable insert drilling

4 Reaming and Countersinking

5 Spindle Tooling

Threading

6 Taps and thread formers

7 Circular and Thread Milling

8 Thread turning

Turning

9 Turning Tools

10 Multifunctional Tools – EcoCut and FreeTurn

11 Grooving Tools

12 Miniature turning tools

Milling

13 HSS Milling Cutters

14 Solid Carbide milling cutters

15 Milling tools with indexable inserts

Clamping technology

16 Adaptors and Accessories

17 Workpiece clamping

18 Material examples and article no. Index

Extended Material Examples for the Cutting Data Tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB
		P.1.3		Tempered	840 N/mm² / 250 HB
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB
		P.1.5		Tempered	1010 N/mm² / 300 HB
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB
		P.2.2		Tempered	930 N/mm² / 275 HB
		P.2.3		Tempered	1010 N/mm² / 300 HB
		P.2.4		Tempered	1200 N/mm² / 375 HB
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB
		M.2.1	Austenitic	Tempered	300 HB
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB
		K.2.2	Pearlitic		845 N/mm² / 250 HB
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB
		K.3.2	Pearlitic		780 N/mm² / 230 HB
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB
		S.1.2		Age-hardened	950 N/mm² / 280 HB
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB
		S.2.2		Age-hardened	1180 N/mm² / 350 HB
		S.2.3		Cast	1080 N/mm² / 320 HB
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB
		S.3.3	Beta alloys		1400 N/mm² / 410 HB
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC
		H.1.2		Hardened and tempered	56–60 HRC
		H.1.3		Hardened and tempered	61–65 HRC
		H.1.4		Hardened and tempered	66–70 HRC
	Chilled iron	H.2.1		Cast	400 HB
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²
		O.3.1	Graphite		

*** Tensile strength**

On the following 16 pages you will find an extension of the material examples to our usual indexes with additional international standards.

Overview of standards:

DIN

Deutsche **I**ndustrie **N**orm (German Standard)

AFNOR

Association **F**rancaise de **N**ormalisation (French Standard)

UNI

Unificazione **I**taliana (Italian Standard)

ČSN

Czechoslovakian Standard

BS

British **S**tandards

SIS

Standardiseringen **i** **S**verige (Swedish Standard)

UNE

Spanish Standard

JIS

Japanese **I**ndustrial **S**tandard

GOST / ГОСТ

Soviet Standard

UNS

Unified **N**umbering **S**ystem

USA

Under **USA** several American standards are summarized

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.1.1	1.5423	16 Mo 5		16 Mo 5		1503-245-420					G 45200	4520
		1.0037	St 37-2	E 24-2		11 343				STKM 12 C			
		1.0044	St 44-2	E 28-2	Fe 430 B FN	11 443	4360-43 B	1412		SM 41 B			A 570 Gr. 40
		1.0116	St 37-3	E 24-3; E 24-4	Fe 360 D FF	11 378	4360-40 C	1312; 1313			St 3 kp; ps; sp		A 573 Gr. 58
		1.0144	St 44-3	E 28-3; E 28-4	Fe 430 D FF	11 448	4360-43 C	1412; 1414		SM 41 C	St 4 kp; ps; sp		A 573 Gr. 70
		1.0301	C 10	AF 34 C 10; XC 10	C 10	12 010	045 M 10			S 10 C	10	G 10100	1010
		1.0401	C 15	AF3 7 C 12; XC 18	C 15; C 16	12 020	080 M 15	1350	F-111			G 10170	1015
		1.0402	C 22	AF 42 C 20	C 20; C 21	12 024	050 A 20	1450	F-112		20	G 10200	1020
		1.0406	C 25	AF 50 C 30	C 25	12 030	070 M 26						1025
		1.0570	St 52-3	E 36-3; E 36-4	Fe 510 B; C; D	11 523	4360-50 B	2132		SM 50 YA	17 GS		
		1.1121	Ck 10	XC 10	C 10	12 010	045 M 10	1265	F-1510	S 10 C; S 9 CK	08; 10	G 10100	1010
		1.1133	20 Mn 5	20 M 5	G 22 Mn 3	42 2714	120 M 19			SMnC 420		G 10220	1022; 1518
		1.1141	Ck 15	XC 15; XC 18	C 15; C 16	12 020	080 M 15	1370	F-1511	S 15 C; S 15 CK	15	G 10170	1015
		1.1151	Ck 22	XC 25; XC 18	C 20		050 A 20			S 20 C; S 20 CK	20		1023
		1.1158	Ck 25	XC 25	C 25	12 030	070 M 26			S 25 C	25	G 10250	1025
	P.1.2	1.0050	St 50-2	A 50-2	Fe 490	11 500	4360-50 B	2172		SS 50	BSt 5 ps; sp		A 570 Gr. 50
		1.0060	St 60-2	A 60-2	Fe 590; Fe 60-2	11 600	4360-SSE; SSC			SM 58	St 6 ps; sp		
		1.0406	C 25	AF 50 C 30	C 25	12 030	070 M 26						1025
		1.0420	GS-38										
		1.0446	GS-45										
		1.0481	17 Mn 4			11 748							
		1.0501	C 35	AF 55 C 35	C 35	12 040	060 A 35	1550	F-113		35	G 10350	1035
		1.0503	C 45	AF 65 C 45	C 45	12 050	080 M 46	1650	F-114		45	G 10430	1045
		1.0511	C 40	AF 60 C 40	C 40	12 041							1040
		1.0528	C 30			12 031							
		1.0540	C 50			12 051							
		1.0552	GS-52										
		1.0558	GS-60										
		1.0619	GS-C 25										
		1.0711	9 S 20		CF 9 S 22		220 M 07	220 M 07		SUM 21	SUM 21	G 12120	1212
		1.0715	9 SMn 28	S 250	CF 9 SMn 28	11 109	230 M 07	1912	F-211 / F-2111	SUM 22		G 12130	1213
		1.0718	9 SMnPb 28	S 250 Pb	CF 9 SMnPb 28			1914	F-212 / F-2112	SUM 22 L		G 12134	12 L 13
		1.0721	10 S 20	10 F 1	CF 10 S 20	10 110	210 M 15		F-2121				1108
		1.0722	10 SPb 20	10 PbF 2	CF 10 SPb 20				F-2122				11 L 08
		1.0723	15 S 20				210 A 15	1922		SUM 32			
		1.0736	9 SMn 36	S 300	CF 9 SMn 36		240 M 07		F-2113			G 12150	1215
		1.0737	9 SMnPb 36	S 300 Pb	CF 9 SMnPb 36			1926	F-2114			G 12144	12 L 14
		1.1118	GS-24 Mn 6			42 2714							
		1.1120	GS-20 Mn 5										
		1.1131	GS-16 Mn 5										
		1.1138	GS-21 Mn 5										
		1.1142	GS-Ck 16										
		1.1151	Ck 22	XC 25; XC 18	C 20		050 A 20			S 20 C; S 20 CK	20		1023
		1.1155	GS-Ck 25										
		1.1158	Ck 25	XC 25	C 25	12 030	070 M 26			S 25 C	25	G 10250	1025
		1.1178	Ck 30										
		1.1181	Ck 35	XC 38 H1:XC 32	C 35	12 040	080 M 36	1572		S 35 C	35	G 10340	1035
		1.1186	Ck 40	XC 42 H1	C 40	12 041	080 M 40			S 40 C	40		1040
		1.1191	Ck 45	XC 42	C 45	12 050	080 M 46	1672		S 45 C	45	G 10420	1045
		1.1206	Ck 50	XC 48 H1		12 051	080 M 50				50		1050
		1.1730	C 45 W	Y3 42		19 083							

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.1.3	1.0501	C 35	AF 55 C 35	C 35	12 040	060 A 35	1550	F-113		35	G 10350	1035
		1.0503	C 45	AF 65 C 45	C 45	12 050	080 M 46	1650	F-114		45	G 10430	1045
		1.0511	C 40	AF 60 C 40	C 40	12 041							1040
		1.0528	C 30			12 031							
		1.0540	C 50			12 051							
		1.0726	35 S 20	35 MF 4		11 140	212 M 36	1957	F-210.G			G 11400	1140
		1.0727	45 S 20	45 MF 4			212 M 44	1973				G 11460	1146
		1.0728	60 S 20	60 MF 4									
		1.1178	Ck 30										
		1.1181	Ck 35	XC 38 H1:XC 32	C 35	12 040	080 M 36	1572		S 35 C	35	G 10340	1035
		1.1186	Ck 40	XC 42 H1	C 40	12 041	080 M 40			S 40 C	40		1040
		1.1191	Ck 45	XC 42	C 45	12 050	080 M 46	1672		S 45 C	45	G 10420	1045
		1.1206	Ck 50	XC 48 H1		12 051	080 M 50				50		1050
	P.1.4	1.0535	C 55	AF 70 C55	C 55	12 060	070 M 55	1655			55		1055
		1.0601	C 60	CC 55	C 60	12 061	080 A 62				60	G 10600	1060
		1.0757	46 SPb 20										
		1.1203	Ck 55	XC 55	C50	12 060	070 M 55			S 55 C	55		1055
		1.1221	Ck 60	XC 60	C60	12 061	080 A 62	1665; 1678		S 58 C	60; 60G	G 10640	1060
		1.1248	Ck 75	XC 75	C 75	12 081	060 A 78	1774; 1778			75	G 10780	1078; 1080
		1.1274	Ck 101	XC 100			060 A 96	1870		SUP 4		G 10950	1095
		1.1520	C 70 W1										
		1.1525	C 80 W1	Y1 90; Y1 80	C 80 KU						U8A	T 72301	W 108
		1.1545+G502	C 105 W1	Y1 105	C 100 KU			1880			U10A	T 72301	W 110
		1.1620	C 70 W2			19 132							
		1.1625	C 80 W2		C 80 KU	19 152	BW 1 B			SKC 3; SK 5; SK 6	U8; 80	T 72301	W 1
		1.1645	C 105 W2	Y2 105	C 100 KU	19 191				SK 3	U10	T 72301	
		1.1663	C 125 W	Y2 120	C 120 KU					SK 2	U13	T 72301	W 112
		1.1673	C 135 W	Y2 140	C 140 KU					SK 1			
		1.1740	C 60 W	Y3 55		19 103				SK 7			
		1.1750	C 75 W				BW 1A				75		W 1
		1.1820	C 55 W										
		1.1830	C 85 W	Y3 90						SK 5			
	P.1.5	1.0535	C 55	AF 70 C55	C 55	12 060	070 M 55	1655			55		1055
		1.0601	C 60	CC 55	C 60	12 061	080 A 62				60	G 10600	1060
		1.1203	Ck 55	XC 55	C50	12 060	070 M 55			S 55 C	55		1055
		1.1221	Ck 60	XC 60	C60	12 061	080 A 62	1665; 1678		S 58 C	60; 60G	G 10640	1060
		1.1231	Ck 67	XC 68	C 70	12 071	060 A 67	1770			70	G 10700	1070
		1.1274	Ck 101	XC 100			060 A 96	1870		SUP 4		G 10950	1095
		1.1520	C 70 W1										
	P.2.1	1.2162	21 MnCr 5	20 NC 5		19 487				SCR 420 H			
		1.2210	115 CrV 3	100 C 3	107 CrV 3 KU	19 421						T 61202	L 2
		1.2323	GS-48 CrMoV 6 7			19 512							
		1.2341	X 6 CrMo 4										
		1.2369	81 CrMov 42 16										
		1.2516	120 WV 4	110 WC 20	110 W 4 KU	19 711	BF 1						
		1.2542	45 WCrV 7		45 WCrV 8 KU	19 732	BS 1	2710				T 41901	S 1
		1.2550	60 WCrV 7	55 WC 20	55 WCrV 8 KU	19 735							
		1.2711	54 NiCrMoV 6	55 NCDV 6		19 662							
		1.2735	15 NiCr 14	10 NC 12		16 240				SNC 22		T 51606	
		1.2762	75 CrMoNiW 6 7										
		1.2842	90 MnCrV 8	90 MV 8	90 MnVCr 8 KU	19 314	BO 2					T 31502	O 2

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.2.1	1.5015	GS-8 Mn 7										
		1.5122	37 MnSi 4			13 240							
		1.5415	15 Mo 3	15 D 3	16 Mo 3	15 020	1501-240	2912					A 204 Gr. A
		1.5419	GS-22 Mo 4										
		1.5621	GS-10 Ni 6										
		1.5622	14 Ni 6	16 N 6	14 Ni 6								A 350-LF 5
		1.5633	GS-24 Ni 8										
		1.5638	GS-10 Ni 14										
		1.5732	14 NiCr 10	14 NC 11	16 NiCr 11				F-1540	SNC 415 (H)			3415
		1.5752	14 NiCr 14	12 NC 15		16 240	655 M 13		F-1540	SNC 815 (H)		G 33106	3310; 9314
		1.5919	15 CrNi 6	16 NC 6	16 CrNi 4	16 220	S 107						
		1.5920	18 CrNi 8	20 NC 6		13 231							
		1.6221	GS-13 MnNi 6 4										
		1.6523	21 NiCrMo 2	20 NCD 2	20 NiCrMo 2		805 M 20	2506	F-1522	SNCM 220 (H)		G 86170	8620
		1.6587	17 CrNiMo 6	18 NCD 6	18 NiCrMo 7		820 A 16						
		1.6750	GS-20 NiCrMo 3 7										
		1.7003	38 Cr 2	38 C 2	38 Cr 2								
		1.7006	46 Cr 2	42 C 2	45 Cr 2								5045
		1.7012	13 Cr 2										
		1.7015	15 Cr 3	12 C 3		14 120	523 M 15			SCr 415 (H)	15Ch	G 50150	5015
		1.7020	32 Cr 2										
		1.7030	28 Cr 4				530 A 30				30Ch		5130
		1.7033	34 Cr 4	32 C 4	34 Cr 4 (KB)		530 A 32			SCr 430 (H)	35Ch	G 51320	5132
		1.7131	16 MnCr 5	16 MC 5	16 MnCr 5	14 220	527 M 17	2511	F-1516 / F-1517	SCR 415	18ChG	G 51170	5115
		1.7139	16 MnCrS 5						F-150D				
		1.7147	20 MnCr 5	20 MC 5	20 MnCr 5	14 221				SMnC 420 (H)	18ChG	G 51200	5120
		1.7149	20 MnCrS 5						F-1551				
		1.7218	25 CrMo 4	25 CD 4 S	25 CrMo 4 (KB)	15 130	1717 CDS 110	2225		SCM 420; SCM 430	30ChM	G 41300	4130
		1.7219	GS-26 CrMo 4										
		1.7220	34 CrMo 4	35 CD 4	35 CrMo 4	15 131	708 A 37	2234		SCM 432; SCCrM 3	AS38ChGM	G 41350	4135; 4137
		1.7262	15 CrMo 5	12 CD 4	12 CrMo 4					SCM 415 (H)			
		1.7264	20 CrMo 5	18 CD 4						SCM 421			
		1.7271	23 CrMoB 3 3										
		1.7311	20 CrMo 2						F-1523				
		1.7321	20 MoCr 4	20 CD 4									
		1.7335	13 CrMo 4 4	15 CD 3.5	14 CrMo 4 5	15 121	1501-620 Gr. 27	2216			12ChM; 15ChM		A 182-F11; F12
		1.7337	16 CrMo 4 4	15 CD 4.5	14 CrMo 4 5		1501-620 Gr. 27	2216			15ChM		A 387 Gr. 12 Cl. 2
		1.7357	GS-17 CrMo 5 5										
		1.7363	GS-12 CrMo 19 5										
		1.7377	GS-17 CrMo 9 10										
		1.7379	GS-18 CrMo 9 10										
		1.7380	10 CrMo 9 10	10 CD 9.10	12 CrMo 9 10		1501-622 Gr. 31; 45	2218				J 21890	A 182-F22
		1.7715	14 MoV 6 3				1503-660-440						
		1.7725	GS-30 CrMoV 6 4										
		1.8504	34 CrAl 6			14 340							
		1.8506	34 CrAlS 5									K 23745	
		1.8521	15 CrMoV 5 9										
		1.0904	55 Si 7	55 S 7	55 Si 8		250 A 53	2085; 2090			55S2		9255
	P.2.2	1.2067	100 Cr 6	Y 100 C 6			BL 3					T 61203	L 3
		1.2101	62 SiMnCr 4										
		1.2103	58 SiCr 8			19 452							

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.2.2	1.2108	90 CrSi 5P										
		1.2162	21 MnCr 5	20 NC 5		19 487				SCR 420 H			
		1.2210	115 CrV 3	100 C 3	107 CrV 3 KU	19 421						T 61202	L 2
		1.2311	40 CrMnMo 7			19 520							
		1.2312	40 CrMnMoS 8 6	40 CMD 8 + S									
		1.2323	GS-48 CrMoV 6 7			19 512							
		1.2330	35 CrMo 4	34 CD 4	35 CrMo 4		708 A 37	2234			35 HM	T 51620	4135
		1.2332	47 CrMo 4	42 CD 4	40 CrMo 4		708 M 40	2244					4142
		1.2419	105 WCr 6	105 WC 13	107 WCr 5 KU					SKS 31	ChWG		
		1.2510	100 MnCrW 4	90 MWCV 5	95 MnWCr 5 KU	19 314	BO 1	2140	F-5220	SKS 3		T 31501	O 1
		1.2542	45 WCrV 7		45 WCrV 8 KU	19 732	BS 1	2710				T 41901	S 1
		1.2550	60 WCrV 7	55 WC 20	55 WCrV 8 KU	19 735							
		1.2711	54 NiCrMoV 6	55 NCDV 6		19 662							
		1.2713	55 NiCrMoV 6	55 NCDV 7		19 662			F-520.S	SKT 4	5ChNM	T 61206	L 6
		1.2721	50 NiCr 13										
		1.2738	40 CrMnNiMo 8						F-5303				
		1.2826	60 MnSiCr 4										
		1.2833	100 V 1	Y1 105 V	102 V 2 KU	19 356	BW 2			SKS 43		T 72302	W 210
		1.2842	90 MnCrV 8	90 MV 8	90 MnVCr 8 KU	19 314	BO 2					T 31502	O 2
		1.3505	100 Cr 6	100 C 6	100 Cr 6	14 100	534 A 99	2258	F-131 / F-1310	SUJ 2	SchCh 15	G 52986	52100
		1.3520	100 CrMn 6			14 209							
		1.3561	44 Cr 2										
		1.3563	43 CrMo 4										
		1.5120	38 MnSi 4										
		1.5121	46 MnSi 4										
		1.5122	37 MnSi 5			13 240							
		1.5131	50 MnSi 4										
		1.5141	53 MnSi 4										
		1.5223	42 MnV 7			13 242							
		1.5710	36 NiCr 6	35 NC 6		16 240	640 A 35			SNC 236			3135
		1.5736	36 NiCr 10	30 NC 11	35 NiCr 9					SNC 631 (H)			3435
		1.5755	31 NiCr 14	18 NC 13		14 440	653 M 31			SNC 836			
		1.6511	36 CrNiMo 4	40 NCD 3	38 NiCrMo 4 (KB)	16 341	816 M 40				40 ChN2MA	G 98400	9840
		1.6513	28 NiCrMo 4										
		1.6546	40 NiCrMo 2 2	40 NCD 2	40 NiCrMo 2 (KB)		311-Type 7			SNCM 240	38ChGNM	G 87400	8740
		1.6565	40 NiCrMo 6				311-Type 6			SNCM 439	40Ch2N2MA		4340
		1.6570	GS-30 NiCrMo 8 5										
		1.6580	30 CrNiMo 8	30 CND 8	30 NiCrMo 8		823 M 30		F-1272	SNCM 431			
		1.6582	34 CrNiMo 6	35 NCD 6	35 NiCrMo 6 (KW)	16 342	817 M 40	2541	F-128 / F-1270	SNCM 447	38Ch2N2MA		4340
		1.6746	32 NiCrMo 14 5	35 NCD 14			830 M 31						
		1.6781	GS-18 NiCrMo 12 6										
		1.7003	38 Cr 2	38 C 2	38 Cr 2								
		1.7006	46 Cr 2	42 C 2	45 Cr 2								5045
		1.7030	28 Cr 4				530 A 30				30Ch		5130
		1.7033	34 Cr 4	32 C 4	34 Cr 4 (KB)		530 A 32			SCr 430 (H)	35Ch	G 51320	5132
		1.7034	37 Cr 4	38 C 4	38 Cr 4	14 140	530 A 36			SCr 435 H	40Ch		5135
		1.7035	41 Cr 4	42 C 4	41 Cr 4		530 M 40			SCr 440 (H)	40Ch	G 51400	5140
		1.7045	42 Cr 4	42 C 4 TS	41 Cr 4		530 A 40	2245		SCr 440	40Ch		5140
		1.7103	67 SiCr 5										
		1.7131	16 MnCr 5	16 MC 5	16 MnCr 5	14 220	527 M 17	2511	F-1516 / F-1517	SCR 415	18ChG	G 51170	5115
		1.7139	16 MnCrS 5						F-150D				

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.2.2	1.7147	20 MnCr 5	20 MC 5	20 MnCr 5	14 221				SMnC 420 (H)	18ChG	G 51200	5120
		1.7149	20 MnCrS 5						F-1551				
		1.7176	55 Cr 3	55 C 3	55 Cr 3		527 A 60	2253	F-1431	SUP 9 (A)	50ChGA	G 51550	5155
		1.7218	25 CrMo 4	25 CD 4 S	25 CrMo 4 (KB)	15 130	1717 CDS 110	2225		SCM 420; SCM 430	30ChM	G 41300	4130
		1.7220	34 CrMo 4	35 CD 4	35 CrMo 4	15 131	708 A 37	2234		SCM 432; SCCrM 3	AS38ChGM	G 41350	4135; 4137
		1.7223	41 CrMo 4	42 CD 4 TS	41 CrMo 4		708 M 40	2244		SCM 440	40 ChFA	G 41420	4142; 4140
		1.7225	42 CrMo 4	42 CD 4	42 CrMo 4	15 142	708 M 40	2244		SCM 440 (H)		G 41400	4142; 4140
		1.7228	50 CrMo 4	50 CR MO4			708 A 47			SCM 445 (H)	50ChFA	G 41470	4150
		1.7323	20 MoCrS 4	20 CD 4 S									
		1.7325	25 MoCr 4	25 CD 4									
		1.7326	25 MoCrS 4	25 CD 4 S									
		1.7361	32 CrMo 12	30 CD 12	32 CrMo 12	15 230	722 M 24	2240	F-124A				
		1.7707	30 CrMoV 9			15 330							
		1.7709	21 CrMoV 5 7										
		1.7725	GS-30 CrMoV 6 4										
		1.7735	14 CrMoV 6 9	15 CDV 6									
		1.8159	50 CrV 4	50 CV 4	51 CrV 4	15 260	735 A 50	2230	F-143 / F-1430	SUP 10	50ChGFA	G 61500	6150
		1.8161	58 CrV 4			15 261							
		1.8507	34 CrAlMo 5	30 CAD 6.12	34 CrAlMo 7		905 M 31		F-1741			K 23545	A 355 Cl. D
		1.8509	41 CrAlMo 7	40 CAD 6.12	41 CrAlMo 7	15 340	905 M 39	2940	F-1740	SACM 645	38ChMJuA	K 24065	A 355 Cl. A
		1.8515	31 CrMo 12	30 CD 12	31 CrMo 12		722 M 24	2240	F-1712				
		1.8519	31 CrMoV 9						F-1721				
		1.8523	39 CrMoV 13 9		36 CrMoV 13 9		897 M 39						
		1.8550	34 CrAlNi 7									K 52440	
		1.0904	55 Si 7	55 S 7	55 Si 8		250 A 53	2085; 2090			55S2		9255
		1.1157	40 Mn 4	35 M 5			150 M 36				40G	G 10390	1039
		1.1165	30 Mn 5	35 M 5		13 141	120 M 36			SMn 433 H; SCMn 2	30GSL		1330
		1.1167	36 Mn 5	40 M 5		42 2715	150 M 36	2120		SMn 438 (H); SCMn 3	35G2; 35GL	G 13350	1335
		1.1170	28 Mn 6	20 M 5	C 28 Mn	13 141	150 M 28			SCMn 1	30G		1330
	P.2.3	1.2744	57 NiCrMoV 7 7										
		1.7131	16 MnCr 5	16 MC 5	16 MnCr 5	14 220	527 M 17		F-1516 / F-1517	SCR 415	18ChG	G 51170	5115
		1.7755	GS-35 CrMoV 10 4										
	P.2.4	1.2714	56 NiCrMoV 7			19 663							
		1.3505	100 Cr 6	100 C 6	100 Cr 6	14 100	534 A 99	2258	F-131 / F-1310	SUJ 2	SchCh 15	G 52986	52100
		1.7225	42 CrMo 4	42 CD 4	42 CrMo 4	15 142	708 M 40	2244		SCM 440 (H)		G 41400	4142; 4140
	P.3.1	1.2080	X 210 Cr 12	Z 200 C 12	X 210 Cr 13 KU	19 436	BD 3			SKD 1	Ch12	T 30403	D 3
		1.2201	G-X 165 CrV 12			19 572							
		1.2343	X 38 CrMoV 5 1	Z 38 CDV 5	X 37 CrMoV 5 1 KU	19 552	BH 11		F-5317	SKD 6	4Ch5MFS	T 28811	H 11
		1.2363	X 100 CrMoV 5 1	Z 100 CDV 5	X 100 CrMoV 5 1 KU	19 571	BA 2	2260	F-5227	SKD 12		T 30102	A 2
		1.2365	X 32 CrMoV 3 3	32 DCV 28	30 CrMoV 12 27 KU	19 541	BH 10			SKD 7	3Ch3M3F	T 20810	H 10
		1.2367	X 38 CrMoV 5 3										
		1.2379	X 155 CrVMo 12 1	Z 160 CDV 12	X 155 CrVMo 12 1 KU	19 573	BD 2		F-5211	SKD 11		T 30402	D 2
		1.2436	X 210 CrW 12	Z 200 CW 12	X 215 CrW 12 1 KU	19 437		2312	F-5213	SKD 2			
		1.2567	X 30 WCrV 5 3	Z 32 WCV 5	X 30 WCrV 5 3 KU	19 720				SKD 4			
		1.2581	X 30 WCrV 9 3	Z 30 WCV 9	X 30 WCrV 9 3 KU	19 721	BH 21			SKD 5	3Ch2W8F	T 20821	H 21
		1.2601	X 165 CrMoV 12		X 165 CrMoW 12 KU	19 572		2310					
		1.2606	G-X 37 CrMoW 5 1										
		1.2764	X 19 NiCrMo 4										
		1.2767	X 45 NiCrMo 4	Y 35 NCD 16	42 NiCrMo 15 7	19 655							
		1.2880	G-X 165 CrCoMo 12										
		1.2885	X 32 CrMoCoV 3 3 3	30 DCKV 28									

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.3.1	1.3302	S 12-1-4			19 810							
		1.3318	S 12-1-2			19 802							
		1.3333	S 3-3-2		HS 3-3-2	19 820							
		1.3343	S 6-5-2	Z 85 WDCV 06-05-04-0	HS 6-5-2	19 830	BM 2	2722	F-5603	SKH 9; SKH 51	R6AM5	T 11302	M 2
		1.3346	S 2-9-1	Z 85 DCWV 08-04-02-0	HS 1-8-1		BM 1				H41	T 11301	H 41; M 1
		1.4943	X 4 NiCrTi 25 15	Z 6 NCTDV 25.15 B			HR 251; HR 52; HR 51			SUH 660			
		1.5662	G-X 8 Ni 9										
		1.5680	12 Ni 19	Z 18 N 5									2515
	P.3.2	1.2080	X 210 Cr 12	Z 200 C 12	X 210 Cr 13 KU	19 436	BD 3			SKD 1	Ch12	T 30403	D 3
		1.2343	X 38 CrMoV 5 1	Z 38 CDV 5	X 37 CrMoV 5 1 KU	19 552	BH 11		F-5317	SKD 6	4Ch5MFS	T 28811	H 11
		1.2344	X 40 CrMoV 5 1	Z 40 CDV 5	X 40 CrMo 5 1 1 KU	19 554	BH 13	2242	F-5318	SKD 61	4Ch5MF1S	T 20813	H 13
		1.2363	X 100 CrMoV 5 1	Z 100 CDV 5	X 100 CrMoV 5 1 KU	19 571	BA 2	2260	F-5227	SKD 12		T 30102	A 2
		1.2365	X 32 CrMoV 3 3	32 DCV 28	30 CrMoV 12 27 KU	19 541	BH 10			SKD 7	3Ch3M3F	T 20810	H 10
		1.2367	X 38 CrMoV 5 3										
		1.2379	X 155 CrVMo 12 1	Z 160 CDV 12	X 155 CrVMo 12 1 KU	19 573	BD 2		F-5211	SKD 11		T 30402	D 2
		1.2567	X 30 WCrV 5 3	Z 32 WCV 5	X 30 WCrV 5 3 KU	19 720				SKD 4			
		1.2581	X 30 WCrV 9 3	Z 30 WCV 9	X 30 WCrV 9 3 KU	19 721	BH 21			SKD 5	3Ch2W8F	T 20821	H 21
		1.2606	G-X 37 CrMoW 5 1										
		1.2709	X 2 NiCoMoTi 18 9 5										
		1.2764	X 19 NiCrMo 4										
		1.2767	X 45 NiCrMo 4	Y 35 NCD 16	42 NiCrMo 15 7	19 655							
		1.2885	X 32 CrMoCoV 3 3 3	30 DCKV 28									
		1.3207	S 10-4-3-10	Z 130 WKCDV 10-10-04	HS 10-4-3-10	19 861	BT 42		F-5553	SKH 57			
		1.3243	S 6-5-2-5	Z 85 WDKCV 06-05-05	HS 6-5-2-5	19 852		2723	F-5613	SKH 55	R6M5K5		
		1.3246	S 7-4-2-5	Z 110 WKCDV 07-05-04	HS 7-4-2-5	19 851						T 11341	M 41
		1.3247	S 2-10-1-8	Z 110 DKCWV 09-08-04	HS 2-9-1-8		BM 42			SKH 51		T 11342	M 42
		1.3249	S 2-9-2-8				BM 34					T 11333	M 33; M 34
		1.3255	S 18-1-2-5	Z 80 WKCV 18-05-04-0	HS 18-1-1-5	19 855	BT 4			SKH 3		T 12004	T 4
		1.3265	S 18-1-2-10		HS 18-0-1-10	19 860	BT 5			SKH 4 A		T 12005	T 5
		1.3344	S 6-5-3	Z 120 WDCV 06-05-04	HS 6-5-3		BM 4			SKH 52; SKH 53		T 11323	M 3 Cl. 2
		1.3348	S 2-9-2	Z 100 DCWV 09-04-02	HS 2-9-2			2782				T 11307	M 7
		1.3401	G-X 120 Mn 12	Z 120 M 12	XG 120 Mn 12		Z 120 M 12			SCMnH 1	110G13L		A 128 (A)
		1.5860	14 NiCr 18			16 523							
		1.5864	35 NiCr 18			16 640			F-122				
	P.3.3	1.6359	X 2 NiCrMo 18 8 5	Maraging 250								K 92890	
	P.4.1	1.2083	X 42 Cr 13	Z 40 C 14	X 41 Cr 13 KU	19 435			F-5263	SUS 420 J 2			
		1.2316	X 36 CrMo 17	Z 38 CD 17	X 38 CrMo 16 1 KU								
		1.3543	X 102 CrMo 17	Z 100 CD 17									
		1.4001	G-X 7 Cr 13	Z 8 C 13 FF		17 020			F-8401				
		1.4002	X 6 CrAl 13	Z 6 CA 13	X 6 CrAl 13		405 S 17	2302	F-3111	SUS 405		S 40500	405
		1.4005	X 12 CrS 13	Z 12 CF 13	X 12 CrS 13		416 S 21	2380		SUS 416		S 41600	416
		1.4006	X 10 Cr 13	Z 12 C 13	X 12 Cr 13	17 021	410 S 21	2302	F-3401	SUS 410	12Ch13	S 41000	410; CA-15
		1.4008	G-X 8 CrNi 13	Z 12 CN 13 M		42 2904							
		1.4016	X 6 Cr 17	Z 8 C 17	X 8 Cr 17	17 040	430 S 15	2320	F-3113	SUS 430	12Ch17	S 43000	430
		1.4021	X 20 Cr 13	Z 20 C 13	X 20 Cr 13	17 022	420 S 37	2303	F-3402	SUS 420 J 1	20Ch13	S 42000	420
		1.4024	X 15 Cr 13	Z 13 C 13		17 021	420 S 29			SUS 410 J 1			
		1.4027	G-X 20 Cr 14	Z 20 C 13 M		42 2906	420 C 29			SCS 2	20Ch13L		
		1.4028	X 30 Cr 13	Z 30 C 13	X 30 Cr 13	17 023	420 S 45	2304		SUS 420 J 2	30Ch13		
		1.4031	X 38 Cr 13	Z 40 C 14	X 40 Cr 14	17 024		2304	F-3404	SUS 420 J 2	40Ch13		
		1.4034	X 46 Cr 13	Z 40 C 14	X 40 Cr 14	17 029	420 S 45		F-3405		40Ch13		
		1.4085	G-X 70 Cr 29										

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.4.1	1.4104	X 14 CrMoS 17	Z 10 CF 17	X 10 CrS 17	17 140		2383	F-3403	SUS 430 F		S 43020	430 F
		1.4105	X 4 CrMoS 18						F-3114				
		1.4106	X 2 CrMoSiS 18 2 1										
		1.4107	G-X 8 CrNi 12			42 2904							
		1.4109	X 65 CrMo 14										
		1.4112	X 90 CrMoV 18									S 44003	
		1.4113	X 6 CrMo 17	Z 8 CD 17.01	X 8 CrMo 17		434 S 17	2325	F-3116	SUS 434		S 43400	434
		1.4116	X 45 CrMoV 15						F-3422				
		1.4122	G-X 35 CrMo 17			17 137							
		1.4125	X 105 CrMo 17	Z 100 CD 17	X 105 CrMo 17					SUS 440 C		S 44004	440 C
		1.4136	G-X 70 CrMo 29 2										
		1.4405	G-X 5 CrNiMo 16 5										
		1.4407	G-X 5 CrNiMo 13 4										
		1.4510	X 6 CrTi 17	Z 8 CT 17	X 6 CrTi 17					SUS 430 LX	08Ch17T	S 43036	XM 8; 430 Ti
		1.4511	X 8 CrNb 17	Z 8 CNb 17	X 6 CrNb 17				F-3122	SUS 430 LX			
		1.4512	X 5 CrTi 12	Z 6 CT 12	X 6 CrTi 12		409 S 19		F-3121	SUH 409		S 40900	409
		1.4528	X 105 CrCoMo 18 2										
		1.4540	G-X 4 CrNiCuNb 16 4										
		1.4724	X 10 CrAl 13	Z 10 C 13	X 10 CrAl 12	17 125	403 S 17		F-3152		10Ch13SJu		
		1.4742	X 10 CrAl 18	Z 10 CAS 18	X 8 Cr 17		430 S 15		F-3153	SUS 430; SUH21			430
		1.4761	G-X 120 CrSi 23										
		1.4762	X 10 CrAl 24	Z 10 CAS 24	X 16 Cr 26	17 153			F-3154			S 44600	446
		1.4931	G-X 22 CrMoV 12 1										
		1.4962	X 12 CrNiWTi 16 3										
		1.6982	G-X 3 CrNi 13 4										
	P.4.2	1.2316	X 36 CrMo 17	Z 38 CD 17	X 38 CrMo 16 1 KU								
		1.4000	X 6 Cr 13	Z 6 C 13	X 6 Cr 13	17 020	403 S 17	2301		SUS 403	08Ch13	S 40300	403
		1.4021	X 20 Cr 13	Z 20 C 13	X 20 Cr 13	17 022	420 S 37	2303	F-3402	SUS 420 J 1	20Ch13	S 42000	420
		1.4024	X 15 Cr 13	Z 13 C 13		17 021	420 S 29			SUS 410 J 1			
		1.4028	X 30 Cr 13	Z 30 C 13	X 30 Cr 13	17 023	420 S 45	2304		SUS 420 J 2	30Ch13		
		1.4031	X 38 Cr 13	Z 40 C 14	X 40 Cr 14	17 024		2304	F-3404	SUS 420 J 2	40Ch13		
		1.4034	X 46 Cr 13	Z 40 C 14	X 40 Cr 14	17 029	420 S 45		F-3405		40Ch13		
		1.4057	X 20 CrNi 17 2	Z 15 CN 16.02	X 16 CrNi 16	17 145	431 S 29	2321	F-3427	SUS 431	20Ch17N2	S 43100	431
		1.4059	G-X 22 CrNi 17										
		1.4086	G-X 120 Cr 29										
		1.4108	X 100 CrMo 13										
		1.4112	X 90 CrMoV 18									S 44003	
		1.4116	X 45 CrMoV 15						F-3422				
		1.4120	G-X 20 CrMo 13										
		1.4122	G-X 35 CrMo 17			17 137							
		1.4138	G-X 120 CrMo 29 2										
		1.4313	X 5 CrNi 13 4	Z 5 CN 13.4	X 6 CrNi 13 04		425 C 11	2385		SCS 5			CA 6-NM
		1.4340	G-X 40 CrNi 27 4										
		1.4464	G-X 40 CrNiMo 27 5										
		1.4542	X 7 CrNiCu 16 4 4	Z7 CNU 17 04 04 (17-4PH)						SCS 24; SUS 630		S 17400	630
		1.4545	X 5 CrNiCu 15-5	E-Z5 CNU 15 05 (15-5PH)									
		1.4710	G-X 30 CrSi 6										
		1.4718	X 45 CrSi 9 3	Z 45 CS 9	X 45 CrSi 8	17 115	401 S 45		F-3220	SUH 1	40Ch9S2	S 65007	HNV 3
		1.4729	G-X 40 CrSi 13										
		1.4740	G-X 40 CrSi 17										
		1.4743	G-X 160 CrSi 18										

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
P	P.4.2	1.4745	G-X 40 CrSi 23										
		1.4747	X 80 CrNiSi 20	Z 80 CSN 20.02	X 80 CrSiNi 20		443 S 65			SUH 4		S 65006	HNV 6
		1.4776	G-X 40 CrSi 29										
		1.4823	G-X 40 CrNiSi 27 4										
		1.4923	X 22 CrMoV 12 1			17 134	762						
		1.4928	G-X 12 CrNiMoCoVN 12										
		1.4935	X 20 CrMoWV 12 1									S 42200	
M	M.1.1	1.3941	G-X 4 CrNi 18 13										
		1.3944	G-X 5 CrNi 18 11										
		1.3952	G-X 4 CrNiMoN 18 14										
		1.3953	G-X 2 CrNiMo 18 15										
		1.3955	G-X 12 CrNi 18 11										
		1.3959	G-X 10 CrNiNb 16 13										
		1.4301	X 5 CrNi 18 10	Z6 CN 18-09	X 5 CrNi 18 10	17 240	304 S 15	2332; 2333	F-3504	SUS 304	08Ch18N10	S 30400	304; 304 H
		1.4303	X 5 CrNi 18 12	Z 8 CN 18.12	X 8 CrNi 19 10		305 S 19			SUS 305	06Ch18N11	S 30500	308; 305
		1.4305	X 10 CrNiS 18 9	Z8 CNF 18-03	X 10 CrNi 18 09	17 243	303 S 21	2346		SUS 303		S 30300	303
		1.4306	X 2 CrNi 19 11	Z3 CN 18-10	X 2 CrNi 18 11	17 249	304 S 12	2352; 2333	F-3503	SCS 19	03Ch18N11	S 30403	304 L
		1.4308	G-X 6 CrNi 18 9	Z 6 CN 18.10 M		42 2930	304 C 15	2333	F-8411	SCS 13	07Ch18N9L		CF-8
		1.4311	X 2 CrNiN 18 10	Z 2 CN 18 .10	X 2 CrNiN 18 11	17 249	304 S 62	2371		SUS 304 LN		S 30453	304 LN
		1.4312	G-X 10 CrNi 18 8			42 2931							
		1.4401	X 5 CrNiMo 18 10	Z6 CND 17 12 02	X 5 CrNiMo 17 12	17 346	316 S 16	2347	F-3543	SUS 316		S 31600	316
		1.4404	X 2 CrNiMo 17 13 2	Z3 CND 17 12 02	X 2 CrNiMo 17 12	17 349	316 S 11	2348	F-3533	SUS 316 L		S 31603	316 L
		1.4406	X 2 CrNiMoN 17 12 2	Z 2 CND 17.12 Az	X 2 CrNiMoN 17 12		316 S 61			SUS 316 LN		S 31653	316 LN
		1.4408	G-X 6 CrNiMo 18 10			42 2940			F-8414				
		1.4413	G-X 4 CrNiMo 13-4										
		1.4429	X 2 CrNiMoN 17 13 3	Z3 CND 17 11 03 Az	X 2 CrNiMoN 17 13		316 S 62	2375		SUS 316 LN		S 31653	316 LN
		1.4435	X 2 CrNiMo 18 14 3	Z 2 CND 17.13	X 2 CrNiMo 17 13		316 S 12	2353		SCS 16; SUS 316 L	03Ch17N 14M2	S 31603	316 L
		1.4436	X 5 CrNiMo 17 13 3	Z 6 CND 17.12	X 5 CrNiMo 17 13		316 S 16	2343		SUS 316		S 31600	316
		1.4437	G-X 6 CrNiMo 18 12			42 2940							
		1.4438	X 2 CrNiMo 18 16 4	Z 2 CND 19.15	X 2 CrNiMo 18 15		317 S 12	2367		SUS 317 L		S 31703	317 L
		1.4439	G-X 3 CrNiMo 17 13 5						F-3544				
		1.4446	G-X 2 CrNiMo 17 13 4										
		1.4448	G-X 6 CrNiMo 17 13										
		1.4449	X 3 CrNiMo 18 12 3										
		1.4507	X 2 CrNiMOCuN 25 6 3	Z3 CNDU 25 07 Az (Uranus 52 N)								S 32750	F61
		1.4541	X 6 CrNiTi 18 10	Z 6 CNT 18.10	X 6 CrNiTi 18 11	17 248	321 S 12	2337		SUS 321	12Ch18N 10T	S 32100	321
		1.4546	X 5 CrNiNb 18 10		X 6 CrNiNb 18 11		347 S 18					S 34800	348
		1.4550	X 6 CrNiNb 18 10	Z10 CNNb 18-10	X 6 CrNiNb 18 11	17 245	347 S 17	2338	F-3552 / F-3524	SUS 347	08Ch18N 12B	S 34700	347
		1.4552	G-X 5 CrNiNb 18 9			42 2933			F-8413				
		1.4571	X 6 CrNiMoTi 17 12 2	Z 6 CNT 17.12	X 6 CrNiMoTi 17 12	17 348	320 S 31	2350	F-3535		10Ch17N13M2T	S 31635	316 Ti
		1.4573	X 10 CrNiMoTi 18 12		X 6 CrNiMoTi 17 13		320 S 33				10Ch17N13M3T	S 31635	316 Ti
		1.4580	X 6 CrNiMoNb 17 12 2	Z 6 CNDNb 17.12	X 6 CrNiMoNb 17 12		318 S 17		F-3536		08Ch16N13M2B	S 31640	316 Cb
		1.4581	G-X 5 CrNiMoNb 18 10	Z 4 CNDNb 18.12 M	GX 6 CrMoNb 20 11	42 2941	318 C 17			SCS 22			
		1.4583	X 10 CrNiMoNb 18 12		X 6 CrNiMoNb 17 13								318
		1.4821	X 15 CrNiSi 25-4	Z20 CNS 25 04									
		1.4825	G-X 25 CrNiSi 18 9			42 2932							
		1.4826	G-X 40 CrNiSi 22 9			42 2934							
		1.4828	X 15 CrNiSi 20 12	Z 15 CNS 20.12		17 251	309 S 24		F-3312	SUH 309	20Ch20N 14S2	S 30900	309
		1.4832	G-X 25 CrNiSi 20 14										
		1.4876	X 10 NiCrAlTi 32 20	Z10 NCAT 32-21 (Incoloy 800)		17 358	NA 15 (H)		F-3314	NCF 800			B 163
		1.4878	X 12 CrNiTi 18 9	Z 6 CNT 18.12 (B)	X 6 CrNiTi 18 11	17 246	321 S 20	2337		SUS 321	12Ch18N 10T		321

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
M	M.1.1	1.4968	G-X 7 CrNiNb 16 13										
		1.4988	G-X 8 CrNiMoVNb 16 1										
		1.6901	G-X 8 CrNi 18 10										
		1.6902	G-X 6 CrNi 18 10										
		1.6905	G-X 5 CrNiNb 18 10										
	M.2.1	1.3964	G-X 4 CrNiMnMoN 19 1										
		1.4310	X 12 CrNi 17 7	Z 12 CN 17.07	X 12 CrNi 17 07		301 S 21			SUS 301		S 30100	301
		1.4465	G-X 2 CrNiMoN 25 25										
		1.4536	G-X 2 NiCrMoCuN 25 2										
		1.4539	X 1 NiCrMoCu 25 20 5	Z2 NCDU 25 20 (Uranus B6)								N 08904	904L
		1.4547	X 1 CrNiMoCuN 20 18 17	Z1 CNDU 20 18 06 Az (254 SMO)									F44
		1.4568	X 7 CrNiAl 17 7										17-7 PH
		1.4837	G-X 40 CrNiSi 25 12			42 2936							
		1.4840	G-X 15 CrNi 25 20										
		1.4841	X 15 CrNiSi 25 20	Z 15 CNS 25.20	X 16 CrNiSi 25 20	17 255			F-3310	SUH 310	20Ch25N 20S2	S 31000	314; 310
		1.4845	X 12 CrNi 25 21	Z 12 CN 25.20	X 6 CrNi 26 20	17 255	310 S24	2361		SUH 310;		S 31008	310 S
		1.4848	G-X 40 CrNiSi 25 20		GX 40 CrNi 26 20	42 2952							
		1.4849	G-X 40 NiCrSiNb 38 1										
		1.4852	G-X 40 NiCrNb 35 25										
		1.4855	G-X 30 CrNiSiNb 24 2										
		1.4857	G-X 40 NiCrSi 35 25										
		1.4864	X 12 NiCrSi 36 16	Z 12 NCS 37.18		17 253	NA 17		F-3313	SUH 330		N 08330	330
		1.4865	G-X 40 NiCrSi 38 18		GX 50 NiCr 39 19		330 C 40			SCH 15; SCH 16			
		1.4871	X 53 CrMnNiN 21 9	Z 52 CMN 21.09	X 53 CrMnNiN 21 9		349 S 54		F-3217	SUH 35; SUH 36	55Ch20G9AN4	S 63008	EV 8
		1.4873	X 45 CrNiW 18 9	Z 35 CNWS 20.09	X 45 CrNiW 18 9		331 S 40			SUH 31			
	M.3.1	1.4339	G-X 32 CrNi 28 10										
		1.4347	G-X 8 CrNi 26 7										
		1.4410	X 2 CrNiMoN 25 7 4	Z2 CND 25 07 04 Az					F-3552				F53
		1.4460	X 8 CrNiMo 27 5	Z5 CND 25 05 AZ				2324		SUS 329 J 1		S 32900	329 LN
		1.4462	X 2 CrNiMoN 22 5 3	Z2 CND 22 05 03 AZ (Uranus 45 N)		17 381			F-3308			S 31803	329 A (F51)
		1.4463	G-X 6 CrNiMo 24 8 2										
		1.4501	X 2 CrNiMoCuWN 25 7 4	Z2 CNDUW 25 07 04 Az (Zeron 100)								S 32760	F55
		1.4815	G-X 8 CrNi 19 10										
		1.4822	G-X 40 CrNi 24 5										
K	K.1.1	0.6010	GG-10	Ft 10 D	G 10	42 2410		01 10-00		FC 10	Sc 10		A48-20 B
		0.6015	GG-15	Ft 15 D	G 15	42 2415	Grade 150	01 15-00	FG-15	FC 15	Sc 15		A48-25 B
		0.6020	GG-20	Ft 20 D	G 20	42 2420	Grade 220	01 20-00	FG-20	FC 20	Sc 20		A48-30 B
		0.6025	GG-25	Ft 25 D	G 25	42 2425	Grade 260	01 25-00	FG-25	FC 25	Sc 25		A48-40 B
	K.1.2	0.6030	GG-30	Ft 30 D	G 30	42 2430	Grade 300	01 30-00	FG-30	FC 30	Sc 30		A48-45 B
		0.6035	GG-35	Ft 35 D	G 35	42 2435	Grade 350	01 35-00	FG-35	FC 35	Sc 35		A48-50 B
		0.6040	GG-40	Ft 40 D		42 2440	Grade 400	01 40-00			Sc 40		A48-60 B
		0.6652	GGL-NiMn 13 7	L- NM 13 7			L-NiMn 13 7						
		0.6655	GGL-NiCuCr 15 6 2	L-NUC 15 6 2			L-NiCuCr 15 6 2						A 436 Type 1
		0.6656	GGL-NiCuCr 15 6 3	L-NUC 15 6 3			L-NiCuCr 15 6 3						A 436 Type 1b
		0.6660	GGL-NiCr 20 2	L-NC 20 2			L-NiCr 20 2	05 23-00					A 436 Type 2
		0.6661	GGL-NiCr 20 3	L-NC 20 3			L-NiCr 20 3						A 436 Type 2b
		0.6667	GGL-NiSiCr 20 5 3	L-NSC 20 5 3			L-NiSiCr 20 5 3						
		0.6676	GGL-NiCr 30 3	L-NC 30 3			L-NiCr 30 3						A 436 Type 3
		0.6680	GGL-NiSiCr 30 5 5	L-NSC 30 5 5			L-NiSiCr 30 5 5						A 436 Type 4
	K.2.1	0.7033	GGG-35.3			42 2303							
		0.7040	GGG-40	FGS 400-12	GS 400-12	42 2304	SNG 420/12	0717-02	FGE 38-17	FCD 40	VC 42-12		60 40 18

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
K	K.2.1	0.7043	GGG-40.3	FGS 370-17	GSO 42/17	42 2314	SNG 370/17	0717-15			VC 42-12		
		0.7050	GGG-50	FGS 500-7	GS 500/7	42 2305	SNG 500/7	0727-02	FGE 50-7	FCD 50	VC 50-2		65-45-12
		0.7060	GGG-60	FGS 600-3	GS 600/3	42 2306	SNG 600/3	0732-03		FCD 60	VC 60-2		80-55-06
	K.2.2	0.7070	GGG-70	FGS 700-2	GS 700-2	42 2307	SNG 700/2	0737-01	FGS 70-2	FCD 70	VC 70-2		100-70-03
		0.7080	GGG-80	FGS 800-2	GS 800-2	42 2308	SNG 800/2				VC 80-2		120-90-02
		0.7652	GGG-NiMn 13 7	S-NM 13 7			S-NiMn 13 7						
		0.7660	GGG-NiCr 20 2	S-NC 20 2			S-NiCr 20 2						A 439 Type D-2
		0.7661	GGG-NiCr 20 3	S-NC 20 3			S-NiCr 20 3						A 439 Type D-2B
		0.7665	GGG-NiSiCr 20 5 2	S-NSC 20 5 2			S-NiSiCr 20 5 2						
		0.7670	GGG-Ni 22	S-N 22			S-Ni 22						A 439 Type D-2C
		0.7673	GGG-NiMn 23 4	S-NM 23 4			S-NiMn 23 4						A 439 Type D-2M
		0.7676	GGG-NiCr 30 3	S-NC 30 3			S-NiCr 30 3						A 439 Type D-3
		0.7677	GGG-NiCr 30 1	S-NC 30 1			S-NiCr 30 1						A 439 Type D-3A
		0.7680	GGG-NiSiCr 30 5 5	S-NSC 30 5 5			S-NiSiCr 30 5 5						A 439 Type D-4
		0.7683	GGG-Ni 35	S-N 35			S-Ni 35						A 439 Type D-5
		0.7685	GGG-NiCr 35 3	S-NC 35 3			S-NiCr 35 3						A 439 Type D-5B
		0.8065	GTW-65										
	K.3.1	0.8035	GTW-35-04			42 2536			GTW 35				
		0.8040	GTW-40-05			42 2540							
		0.8045	GTW-45-07										
		0.8055	GTW-55										
		0.8135	GTS-35-10	MN 35-10		42 2533	B 340/12		GTS 35				
		0.8145	GTS-45-06			42 2545	P 440/7		GTS 45				
		0.8155	GTS-55-04	MP 50-5		42 2555	P 510/4		GTS 55				
		0.8165	GTS-65-02	MP 60-3			P 570/3		GTS 65				
	K.3.2	0.8170	GTS-70-02	IP 70-2			P 690/2		GTS 70				
N	N.1.1	3.3307	Al99.85Mg0.5										
		3.3308	Al99,9Mg0,5										
		3.3315	AlMg1	5005 (AlMg1)					L-3350				
		3.3316	AlMg1.5										
		3.3317	Al99.85Mg1										
		3.3318	Al99.9Mg1										
		3.3326	AlMg1.8										
		3.3523	AlMg2.5										
		3.3525	AlMg2Mn0.3										
		3.3527	AlMg2Mn0.8										
		3.3535	AlMg3	5754									
		3.3537	AlMg2.7Mn										
		3.3555	AlMg5	5056 A									
		3.3561	G-AlMg5										
		3.3591	G-AlMg10										
		3.0205	Al99	1200 (A4)	9001/1	42 4009			L-3001				
		3.0255	Al99.5	1050 A	9001/2	42 4004			L-3051				
		3.0275	Al99.7	1070 A		42 4003			L-3071				
		3.0285	Al99.8	1080 A (A8)		42 4002			L-3081				
		3.0305	Al99.9										
		3.0505	AlMn0.5Mg0.5										
		3.0506	AlMn0.6										
		3.0515	AlMn1			42 4432			L-3810				
		3.0517	AlMnCu										
		3.0525	AlMn1Mg0.5	3005									

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
N	N.1.1	3.0526	AlMn1Mg1										
		3.0615	AlMgSiPb										
		3.0915	AlFeSi										
	N.1.2	3.2307	Al99.85MgSi										
		3.2315	AlMgSi1	6082	9006/4	42 4400							6082
		3.3206	AlMgSi0,5	6060 (AGS)		42 4401			L-3441				6063
		3.3208	Al99.9MgSi										
		3.3210	AlMgSi0.7	6005 A									
		3.3211	AlMg1SiCu	6061									
		3.3345	AlMg4.5										
		3.3545	AlMg4Mn	5086 (AG4MC)	9005/5				L-3322				5083
		3.3547	AlMg4,5Mn0,7	5083 (AlMg5Mn0,7)			N8		L-3321	A 5083			A95083
		3.3549	AlMg5Mn										
		3.4335	AlZn4,5Mg1	7020 (AZ5G)	9007/1	42 4441			L-3741				7020
		3.4337	Al99.8ZnMg										
		3.4345	AlZnMgCu0.5										
		3.4365	AlZnMgCu1.5	7075 (AZ5GU)		42 4222			L-3710				7075
		2.1086	G-CuSn10Zn										
		3.1255	AlCuSiMn	2014	9002/3								2014
		3.1305	AlCu2.5Mg0.5										
		3.1325	AlCuMg1	2017 A (AU4G)					L-3120				2017 A
		3.1355	AlCuMg2	2024 (AU4G1)	9002/4	42 4203			L-3140				2024
		3.1645	AlCuMgPb	2030 (AU4PB)		42 4254			L-3121				
		3.1655	AlCuBiPb	2011 (AU5PbBi)	9002/5				L-3192				2011
		MFK											
	N.2.1	3.2581	G-AlSi12			42 4330							
		3.2583	G-AlSi12(Cu)			42 4330							
		3.3261	G-AlMg5Si			42 4515							
		3.3292	GD-AlMg9			42 4519							
		3.3541	G-AlMg3										
		3.3543	G-AlMg3(Cu)										
	N.2.2	3.2134	G-AlSi5Cu1Mg										
		3.2151	G-AlSi6Cu4			42 4357							
		3.2161	G-AlSi8Cu3										
		3.2341	G-AlSi5Mg										
		3.2371	G-AlSi7Mg			42 4334							
		3.2373	G-AlSi9Mg			42 4331							
		3.2381	G-AlSi10Mg			42 4331							
		3.2383	G-AlSi10Mg(Cu)			42 4331							
		3.3241	G-AlMg3Si										
		3.1371	G-AlCu4TiMg										
		3.1841	G-AlCu4Ti										
	N.3.1	2.0040	OF-Cu			42 3000							
		2.0060	E-Cu57			42 3001							
		2.0065	E-Cu58			42 3001							
		2.0070	SE-Cu										
		2.0076	SW-Cu										
		2.0090	SF-Cu			42 3003							
		2.0220	CuZn5			42 3200							
		2.0230	CuZn10			42 3201							
		2.0240	CuZn15			42 3202							

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
N	N.3.1	2.0250	CuZn20			42 3203							
		2.0261	CuZn28										
		2.0265	CuZn30			42 3210							
		2.0280	CuZn33			42 3212							
		2.0321	CuZn37		C2700	42 3213							
		2.0335	CuZn36										
		2.0360	CuZn40			42 3220							
		2.0460	CuZn20Al2										
		2.0470	CuZn28Sn1										
		2.0510	CuZn37Al1			42 3231							
		2.0530	CuZn38Sn1			42 3237							
		2.0730	CuNi12Zn24										
		2.0740	CuNi18Zn20										
		2.0830	CuNi25										
		2.0842	CuNi44Mn1										
		2.0853	CuNi1.5Si										
		2.0855	CuNi2Si			42 3054							
		2.0857	CuNi3Si										
		2.0872	CuNi10Fe1Mn										
		2.0875	CuNi9Sn2										
		2.0882	CuNi30Mn1Fe										
		2.0883	CuNi30Fe2Mn2										
		2.0918	CuAl5As										
		2.0920	CuAl8										
		2.0932	CuAl8Fe3										
		2.0936	CuAl10Fe3Mn2										
		2.0960	CuAl9Mn2										
		2.0966	CuAl10Ni5Fe4										
		2.0971	CuAl9Ni3Fe2										
		2.1016	CuSn4										
		2.1020	CuSn6										
		2.1030	CuSn8										
		2.1080	CuSn6Zn6										
		2.1191	CuAg0.1P										
		2.1203	CuAg0.1										
		2.1245	CuBe1.7										
		2.1247	CuBe2										
		2.1293	CuCrZr			42 3039							
		2.1310	CuFe2P										
		2.1522	CuSi2Mn										
		2.1525	CuSi3Mn										
		Ampco 16	CuAl10Fe3										
		Ampco 18	CuAl10.5Fe3.5										
		Ampco 8	CuAl6.5Fe2.5Sn										
			Ampco 8-16										
	N.3.2	2.0331	CuZn36Pb1.5			42 3214							
		2.0332	CuZn37Pb0.5										
		2.0372	CuZn39Pb0.5			42 3221							
		2.0540	CuZn35Ni2										
		2.0550	CuZn40Al2										
		2.0561	CuZn40Al1			42 3231							

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
N	N.3.2	2.0572	CuZn40Mn1			42 3234							
		2.0580	CuZn40Mn1Pb										
		2.0780	CuNi12Zn30Pb1										
		2.0790	CuNi18Zn19Pb1										
		2.1498	CuSP										
		2.1504	NiAlBz										
		2.1546	CuTeP										
		Ampco 12	CuAl9Fe3										
		Ampco 20	CuAl11Fe4										
	N.3.3	2.0371	CuZn38Pb1.5			42 3222							
		2.0375	CuZn36Pb3										
		2.0380	CuZn39Pb2			42 3223							
		2.0401	CuZn39Pb3										
		2.0402	CuZn40Pb2			42 3223							
		2.0410	CuZn44Pb2										
		2.0490	CuZn31Si1										
		2.0500	CuZn23Al6Mn4Fe3										
		2.0771	CuNi7Zn39Mn5Pb3										
		2.0978	CuAl11Ni6Fe5										
		2.1093	G-CuSn6ZnNi										
		2.1096	G-CuSn5ZnPb										
		2.1285	CuCo2Be										
		Ampco 21	CuAl13Fe4.5										
		Ampco 22	CuAl14Fe5										
		Ampco 25											
		Ampco 26											
			Ampco 18-26										
	N.4.1	3.5101	G-MgZn4SE1Zr1										
		3.5102	G-MgZn5Th2Zr1										
		3.5103	G-MgSE3Zn2Zr1										
		3.5105	G-MgTh3Zn2Zr1										
		3.5106	G-MgAg3Se2Zr1										
		3.5200	MgMn2										
		3.5312	MgAl3Zn										
		3.5470	GD-MgAl4Si1										
		3.5612	GD-MgAl6Zn1										
		3.5662	G-MgAl6										
		3.5812	G-MgAl8Zn1			42 4911							
		3.5912	GD-MgAl9Zn1			42 4911							
S	S.1.2	1.4980	X 5 NiCrTi 26 15									S66286	
	S.2.1	1.3924	Ni54										
		1.3926	RNi12			42 3484							
		1.3927	RNi8			42 3484							
		2.4360	NiCu30Fe	Monel 400		42 3431							
		2.4610	NiMo16Cr16Ti	Hastelloy C-4									
		2.4617	NiMo28	Hastelloy B-2									
		2.4630	NiCr20Ti	Nimonic 75			HR 5						
		2.4668	NiCr19Fe18Nb5Mg	Inconel 718									
		2.4812	NiCr17Mo17FeW	Hastelloy C									
		2.4819	NiMo16Cr15W	Hastelloy C-276									
		2.4851	NiCr23Fe, Inconel 601	Inconel 601									

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
S	S.2.1	2.4856	NiCr22Mo9Nb	Inconel 625									
		2.4858	NiCr21Mo				NA 16			NCF 825		N 08825	
		2.4951	NiCr20Ti	Nimonic 75			HR 5						
		2.4964	CoCr20W15Ni										
		2.4989	CoCr20NiW										
	S.2.2	2.4375	NiCu30Al	Monel K 500									
		2.4631	NiCr20TiAl	Nimonic 80 A			HR 401; 601			NCF 80 A		N 07080	
		2.4634	NiCo20Cr15MoAlTi	Nimonic 105									
		2.4640	NiCr15Fe	Inconel 600									
		2.4654	NiCr20Co13Mo4Ti4Al	Waspaloy									
		2.4662	NiCr13Mo6Ti3	Nimonic 901									
		2.4668	NiCr19Fe18Nb5Mg	Inconel 718									
		2.4816	NiCr15Fe	Inconel 600			NA 14			NCF 600		N 06600	
		2.4952	NiCr20TiAl	Nimonic 80 A									
		2.4973	NiCr19Co11MoTi										
		2.4983	NiCr18Co18MoAlTi	Udimet 500									
	S.2.3	2.4670	G-NiCr13Al6MoNb	Nimocast 713									
		2.4674	NiCo15Cr10MoAlTi	Nimocast PK 24									
		2.4979	CoCr28MoNi										
	S.3.1	3.7024	Ti99,5										
		3.7025	Ti99,8										
		3.7034	Ti99,7										
		3.7055	Ti99,4										
		3.7064	Ti99,2										
		3.7124	TiCu2										
	S.3.2	3.7114	TiAl5Sn2										
		3.7144	TiAl6Sn2Zr4Mo2										
		3.7154	TiAl6Zr5										
		3.7165	TiAl6V4	T-A 6 V			TA 10 – TA 13					R 56400	
		3.7174	TiAl6V6Sn2										
		3.7184	TiAl4Mo4Sn2				TA 45 – TA 51						
H	H.1.1	1.2311	40 CrMnMo 7			19 520							
		1.2312	40 CrMnMoS 8 6	40 CMD 8 + S									
		1.2316	X 36 CrMo 17	Z 38 CD 17	X 38 CrMo 16 1 KU								
		1.2365	X 32 CrMoV 3 3	32 DCV 28	30 CrMoV 12 27 KU	19 541	BH 10			SKD 7	3Ch3M3F	T 20810	H 10
		1.2567	X 30 WCrV 5 3	Z 32 WCV 5	X 30 WCrV 5 3 KU	19 720				SKD 4			
		1.2581	X 30 WCrV 9 3	Z 30 WCV 9	X 30 WCrV 9 3 KU	19 721	BH 21			SKD 5	3Ch2W8F	T 20821	H 21
		1.2738	40 CrMnNiMo 8						F-5303				
		1.2885	X 32 CrMoCoV 3 3 3	30 DCKV 28									
		1.4028	X 30 Cr 13	Z 30 C 13	X 30 Cr 13	17 023	420 S 45	2304		SUS 420 J 2	30Ch13		
		1.4031	X 38 Cr 13	Z 40 C 14	X 40 Cr 14	17 024		2304	F-3404	SUS 420 J 2	40Ch13		
		1.4034	X 46 Cr 13	Z 40 C 14	X 40 Cr 14	17 029	420 S 45		F-3405		40Ch13		
		1.4112	X 90 CrMoV 18									S 44003	
		1.5122	37 MnSi 4			13 240							
		1.6358	X 2 NiCoMoTi 18 9 5										
		1.6582	34 CrNiMo 6	35 NCD 6	35 NiCrMo 6 (KW)	16 342	817 M 40	2541	F-128 / F-1270	SNCM 447	38Ch2N2MA		4340
		1.7003	38 Cr 2	38 C 2	38 Cr 2								
		1.7006	46 Cr 2	42 C 2	45 Cr 2								5045
		1.7030	28 Cr 4				530 A 30				30Ch		5130
		1.7176	55 Cr 3	55 C 3	55 Cr 3		527 A 60	2253	F-1431	SUP 9 (A)	50ChGA	G 51550	5155
		1.0961	60 SiCr 7	60 SC 7	60 SiCr 8					SUP 7			9262

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
H	H.1.1	1.1248	Ck 75	XC 75	C 75	12 081	060 A 78	1774; 1778			75	G 10780	1078; 1080
		1.1273	90 Mn 4										
	H.1.2	1.2083	X 42 Cr 13	Z 40 C 14	X 41 Cr 13 KU	19 435			F-5263	SUS 420 J 2			
		1.2323	GS-48 CrMoV 6 7										
		1.2343	X 38 CrMoV 5 1	Z 38 CDV 5	X 37 CrMoV 5 1 KU	19 552	BH 11		F-5317	SKD 6	4Ch5MFS	T 28811	H 11
		1.2367	X 38 CrMoV 5 3										
		1.2510	100 MnCrW 4	90 MWCV 5	95 MnWCr 5 KU	19 314	BO 1	2140	F-5220	SKS 3		T 31501	O 1
		1.2542	45 WCrV 7		45 WCrV 8 KU	19 732	BS 1	2710				T 41901	S 1
		1.2550	60 WCrV 7	55 WC 20	55 WCrV 8 KU	19 735							
		1.2606	G-X 37 CrMoW 5 1										
		1.2711	54 NiCrMoV 6	55 NCDV 6		19 662							
		1.2713	55 NiCrMoV 6	55 NCDV 7		19 662			F-520.S	SKT 4	5ChNM	T 61206	L 6
		1.2764	X 19 NiCrMo 4										
		1.2767	X 45 NiCrMo 4	Y 35 NCD 16	42 NiCrMo 15 7	19 655							
		1.4109	X 65 CrMo 14										
		1.4112	X 90 CrMoV 18									S 44003	
		1.1157	40 Mn 4	35 M 5			150 M 36				40G	G 10390	1039
		1.1231	Ck 67	XC 68	C 70	12 071	060 A 67	1770			70	G 10700	1070
		1.1274	Ck 101	XC 100			060 A 96	1870		SUP 4		G 10950	1095
	H.1.3	1.2080	X 210 Cr 12	Z 200 C 12	X 210 Cr 13 KU	19 436	BD 3			SKD 1	Ch12	T 30403	D 3
		1.2101	62 SiMnCr 4										
		1.2162	21 MnCr 5	20 NC 5		19 487				SCR 420 H			
		1.2201	G-X 165 CrV 12										
		1.2210	115 CrV 3	100 C 3	107 CrV 3 KU	19 421						T 61202	L 2
		1.2341	X 6 CrMo 4										
		1.2379	X 155 CrVMo 12 1	Z 160 CDV 12	X 155 CrVMo 12 1 KU	19 573	BD 2		F-5211	SKD 11		T 30402	D 2
		1.2419	105 WCr 6	105 WC 13	107 WCr 5 KU					SKS 31	ChWG		
		1.2601	X 165 CrMoV 12		X 165 CrMoW 12 KU	19 572		2310					
		1.2721	50 NiCr 13										
		1.2735	15 NiCr 14	10 NC 12		16 240				SNC 22		T 51606	
		1.2833	100 V 1	Y1 105 V	102 V 2 KU	19 356	BW 2			SKS 43		T 72302	W 210
		1.2842	90 MnCrV 8	90 MV 8	90 MnVCr 8 KU	19 314	BO 2					T 31502	O 2
		1.3505	100 Cr 6	100 C 6	100 Cr 6	14 100	534 A 99	2258	F-131 / F-1310	SUJ 2	SchCh 15	G 52986	52100
		1.4112	X 90 CrMoV 18									S 44003	
		1.4125	X 105 CrMo 17	Z 100 CD 17	X 105 CrMo 17					SUS 440 C		S 44004	440 C
		1.8161	58 CrV 4			15 261							
		1.1520	C 70 W1										
	H.1.4	1.2363	X 100 CrMoV 5 1	Z 100 CDV 5	X 100 CrMoV 5 1 KU	19 571	BA 2	2260	F-5227	SKD 12		T 30102	A 2
		1.2436	X 210 CrW 12	Z 200 CW 12	X 215 CrW 12 1 KU	19 437		2312	F-5213	SKD 2			
		1.2880	G-X 165 CrCoMo 12										
		1.3202	S 12-1-4-5			19 858						T 12015	T15
		1.3207	S 10-4-3-10	Z 130 WKCDV 10-10-04	HS 10-4-3-10	19 861	BT 42		F-5553	SKH 57			
		1.3243	S 6-5-2-5	Z 85 WDKCV 06-05-05	HS 6-5-2-5	19 852		2723	F-5613	SKH 55	R6M5K5		
		1.3246	S 7-4-2-5	Z 110 WKCDV 07-05-04	HS 7-4-2-5	19 851						T 11341	M 41
		1.3247	S 2-10-1-8	Z 110 DKCWV 09-08-04	HS 2-9-1-8		BM 42			SKH 51		T 11342	M 42
		1.3249	S 2-9-2-8				BM 34					T 11333	M 33; M 34
		1.3257	S 18-1-2-15										
		1.3333	S 3-3-2		HS 3-3-2	19 820							
		1.3343	S 6-5-2	Z 85 WDCV 06-05-04-0	HS 6-5-2	19 830	BM 2	2722	F-5603	SKH 9; SKH 51	R6AM5	T 11302	M 2
		1.3344	S 6-5-3	Z 120 WDCV 06-05-04	HS 6-5-3		BM 4			SKH 52; SKH 53		T 11323	M 3 Cl. 2
		1.3346	S 2-9-1	Z 85 DCWV 08-04-02-0	HS 1-8-1		BM 1				H41	T 11301	H 41; M 1

	Index	Material number	DIN	AFNOR	UNI	ČSN	BS	SIS	UNE	JIS	GOST	UNS	USA
H	H.1.4	1.3348	S 2-9-2	Z 100 DCWV 09-04-02	HS 2-9-2			2782				T 11307	M 7
		1.3355	S 18-0-1	Z 80 WCV 18-04-01	HS 18-0-1	19 824	BT 1			SKH 2	R18	T 12001	T 1
		1.1654	C 110 W										
	H.3.1	0.9620	G-X 260 NiCr 4 2				Grade 2 A	0512-00					A 532 I B NiCr-LC
		0.9625	G-X 330 NiCr 4 2				Grade 2 B	0513-00					A 532 I A NiCr-HC
		0.9630	G-X 300 CrNiSi 9 5 2				Grade 2 C; D; E	0457-00					A 532 I D Ni-HiCr
		0.9635	G-X 330 CrMo 15 3				Grade 3 A; B						A 532 II C 15% CrMo-
		0.9640	G-X 300 CrMoNi 15 2				Grade 3 A; B						
		0.9645	G-X 260 CrMoNi 20 2				Grade 3 C						A 532 II D 20% CrMo-
		0.9650	G-X 260 Cr 27				Grade 3 D	0466-00					A 532 III A 25% Cr
		0.9655	G-X 300 CrMo 27 1				Grade 3 E						A 532 III A 25% Cr
O	O.1.1	EP											
		MF											
		PF											
		UP											
	O.1.2	PA											
		PC											
		PE											
		PI											
		PMMA											
		POM											
		PP											
		PS											
		PTFE											
		PVC											
	O.2.1	AFK											
	O.2.2	CFK											
		GFK											
	O.3.1	Graphit											

ISO designation system

ISO attribute	Feature Description
A	
ADJRG	Adjustment range
ADJRGR	Adjustment range radial
ALP	Clearance angle axial
AN	Clearance angle major
APMX	Depth of cut maximum
B	
B	Shank width
BD	Body diameter
BD_1	Body diameter, 1st cutting step
BD_2	Body diameter, 2nd cutting step
BD_3	Body diameter, 3rd cutting step
BD_4	Body diameter, 4th cutting step
BDRED	Body diameter, reduced
BDX	Body diameter maximum
BHTA	Body half taper angle
BLQ	Balance quality code
BN	Face land width
BS	Trailing edge length
BTED	Body taper end diameter
C	
CDX	Cutting depth maximum
CF	Central flat
CHW	Corner chamfer width
CHWTL	Flank chamfer width left hand
CLDIS_1	Centre line distance 1
CLDIS_2	Centre line distance 2
CLDIS_3	Centre line distance 3
CND	Coolant entry diameter
CNT	Coolant entry, thread size
CODX	Parting off diameter, max.
CRE	Spot radius
CRKS	Pull stud thread size
CW	Cutting width
CXD	Coolant exit diameter
D	
D1	Fixing hole diameter
DAXN	Axial groove outside diameter minimum
DAXX	Axial groove outside diameter maximum
DC	Cutting diameter
DC_1	Cutting diameter, 1st cutting step
DC_2	Cutting diameter, 2nd cutting step
DCD	Cutting diameter drilling part
DCINTF	Interference cutting diameter
DCN	Cutting diameter minimum
DCONMS	Mounting spigot diameter
DCONWS	Connection diameter workpiece side
DCONWS_1	Connection diameter workpiece side – 1
DCONWS_2	Connection diameter workpiece side – 2
DCSKX	Countersunk diameter, max
DCX	Cutting diameter maximum
DF	Flange diameter
DFC	Functional diameter
DHUB	Hub diameter
DLN	Diameter lock nut
DMIN	Minimum bore diameter
DN	Neck Diameter
DRVS	Drive size

ISO attribute	Feature Description
G	
GAN	Insert rake angle
GB	Face land angle
H	
H	Shank height
HDD	Head diameter
HDW	Head width
HF	Functional height
HLN	Lock nut height
HSUP	Support height
I	
IC	Inscribed circle diameter
IDNR	Identifying order number
IH	Insert hand
INSL	Insert length
K	
KAPR	Tool cutting edge angle
KCH	Corner chamfer angle
L	
L	Cutting edge length
L_1	Cutting edge length 1
L_2	Cutting edge length 2
L_3	Cutting edge length 3
LB	Body length
LB_1	Body length 1
LB_2	Body length 2
LCF	Length chip flute
LCOL	Collet length
LDRED	Reduced body diameter length
LE	Cutting edge effective length
LF	Functional length
LF_1	Functional length 1
LF_2	Functional length 2
LF_3	Functional length 3
LFSF	Distance to face
LH	Head length
LPCON	Connection protruding length
LPR	Protruding length
LS	Shank length
LSC	Clamping length machine side
LSCN	Clamping length minimum machine side
LSCX	Clamping length maximum machine side
LTA	Length tool assembly
LU	Usable length
M	
MXC	Clamping force maximum
N	
NOF	Flute count
NT	Tooth count
O	
OAH	Overall height
OAL	Overall length
OAW	Overall width

Continued on next page

ISO designation system

ISO attribute	Feature Description
P	
PDPT	Profile depth insert
PDX	Profile distance ex
PDY	Profile distance ey
PHD	Premachined hole diameter
PL	Point length
PLGL	Plug length
PNA	Profile included angle
PRFA	Profile angle
PRFRAD	Profile radius
PRFRAD1	Profile radius 1
PRFRAD2	Profile radius 2
PRFRAD3	Profile radius 3
PSIR	Tool lead angle
R	
RA	Relief angle
RADH	Radial height
RADW	Radial width
RADWOF	Radial offset width
RAL	Relief angle lh
RAR	Relief angle rh
RCSK	Radius countersunk
RE	Corner radius
RE_1	Corner radius 1
RE_2	Corner radius 2
RE_3	Corner radius 3
REL	Corner radius left hand
RETL	Flank radius left hand
RETR	Flank radius right hand
RHCDL	Radial height chamfer distance lower
RHCDU	Radial height chamfer distance upper
RPMX	Rotational speed maximum
S	
S	Insert thickness
S1	Insert thickness total
SD	Step distance
SDL	Step diameter length
SDL_1	Step diameter length 1
SDL_2	Step diameter length 2
SZID	Nominal size
T	
TD	Thread diameter
TDIN	Thread diameter, inch measure
THID	Thread designation inside
THL	Thread cutting part length
THOD	Thread designation outside
THSZMS	Connection thread nominal size
THSZWS	Connection thread nominal size workpiece side
TP	Thread pitch
TPI	Threads per inch
TQX	Torque maximum

ISO attribute	Feature Description
W	
W1	Insert width
WF	Functional width
WF2	Functional width 2
WT	Weight of item
Z	
ZEFF	Face effective cutting edge count
ZEFP	Peripheral effective cutting edge count
ZNF	Face mounted insert count
ZNP	Peripheral mounted insert count

Our current valid terms and conditions apply which can be found on our website. Images and prices are valid, subject to corrections due to technical improvements or further developments as well as general mistakes and typographical errors.

CERATIZIT GROUP
CERATIZIT GROUP
CERATIZIT GROUP

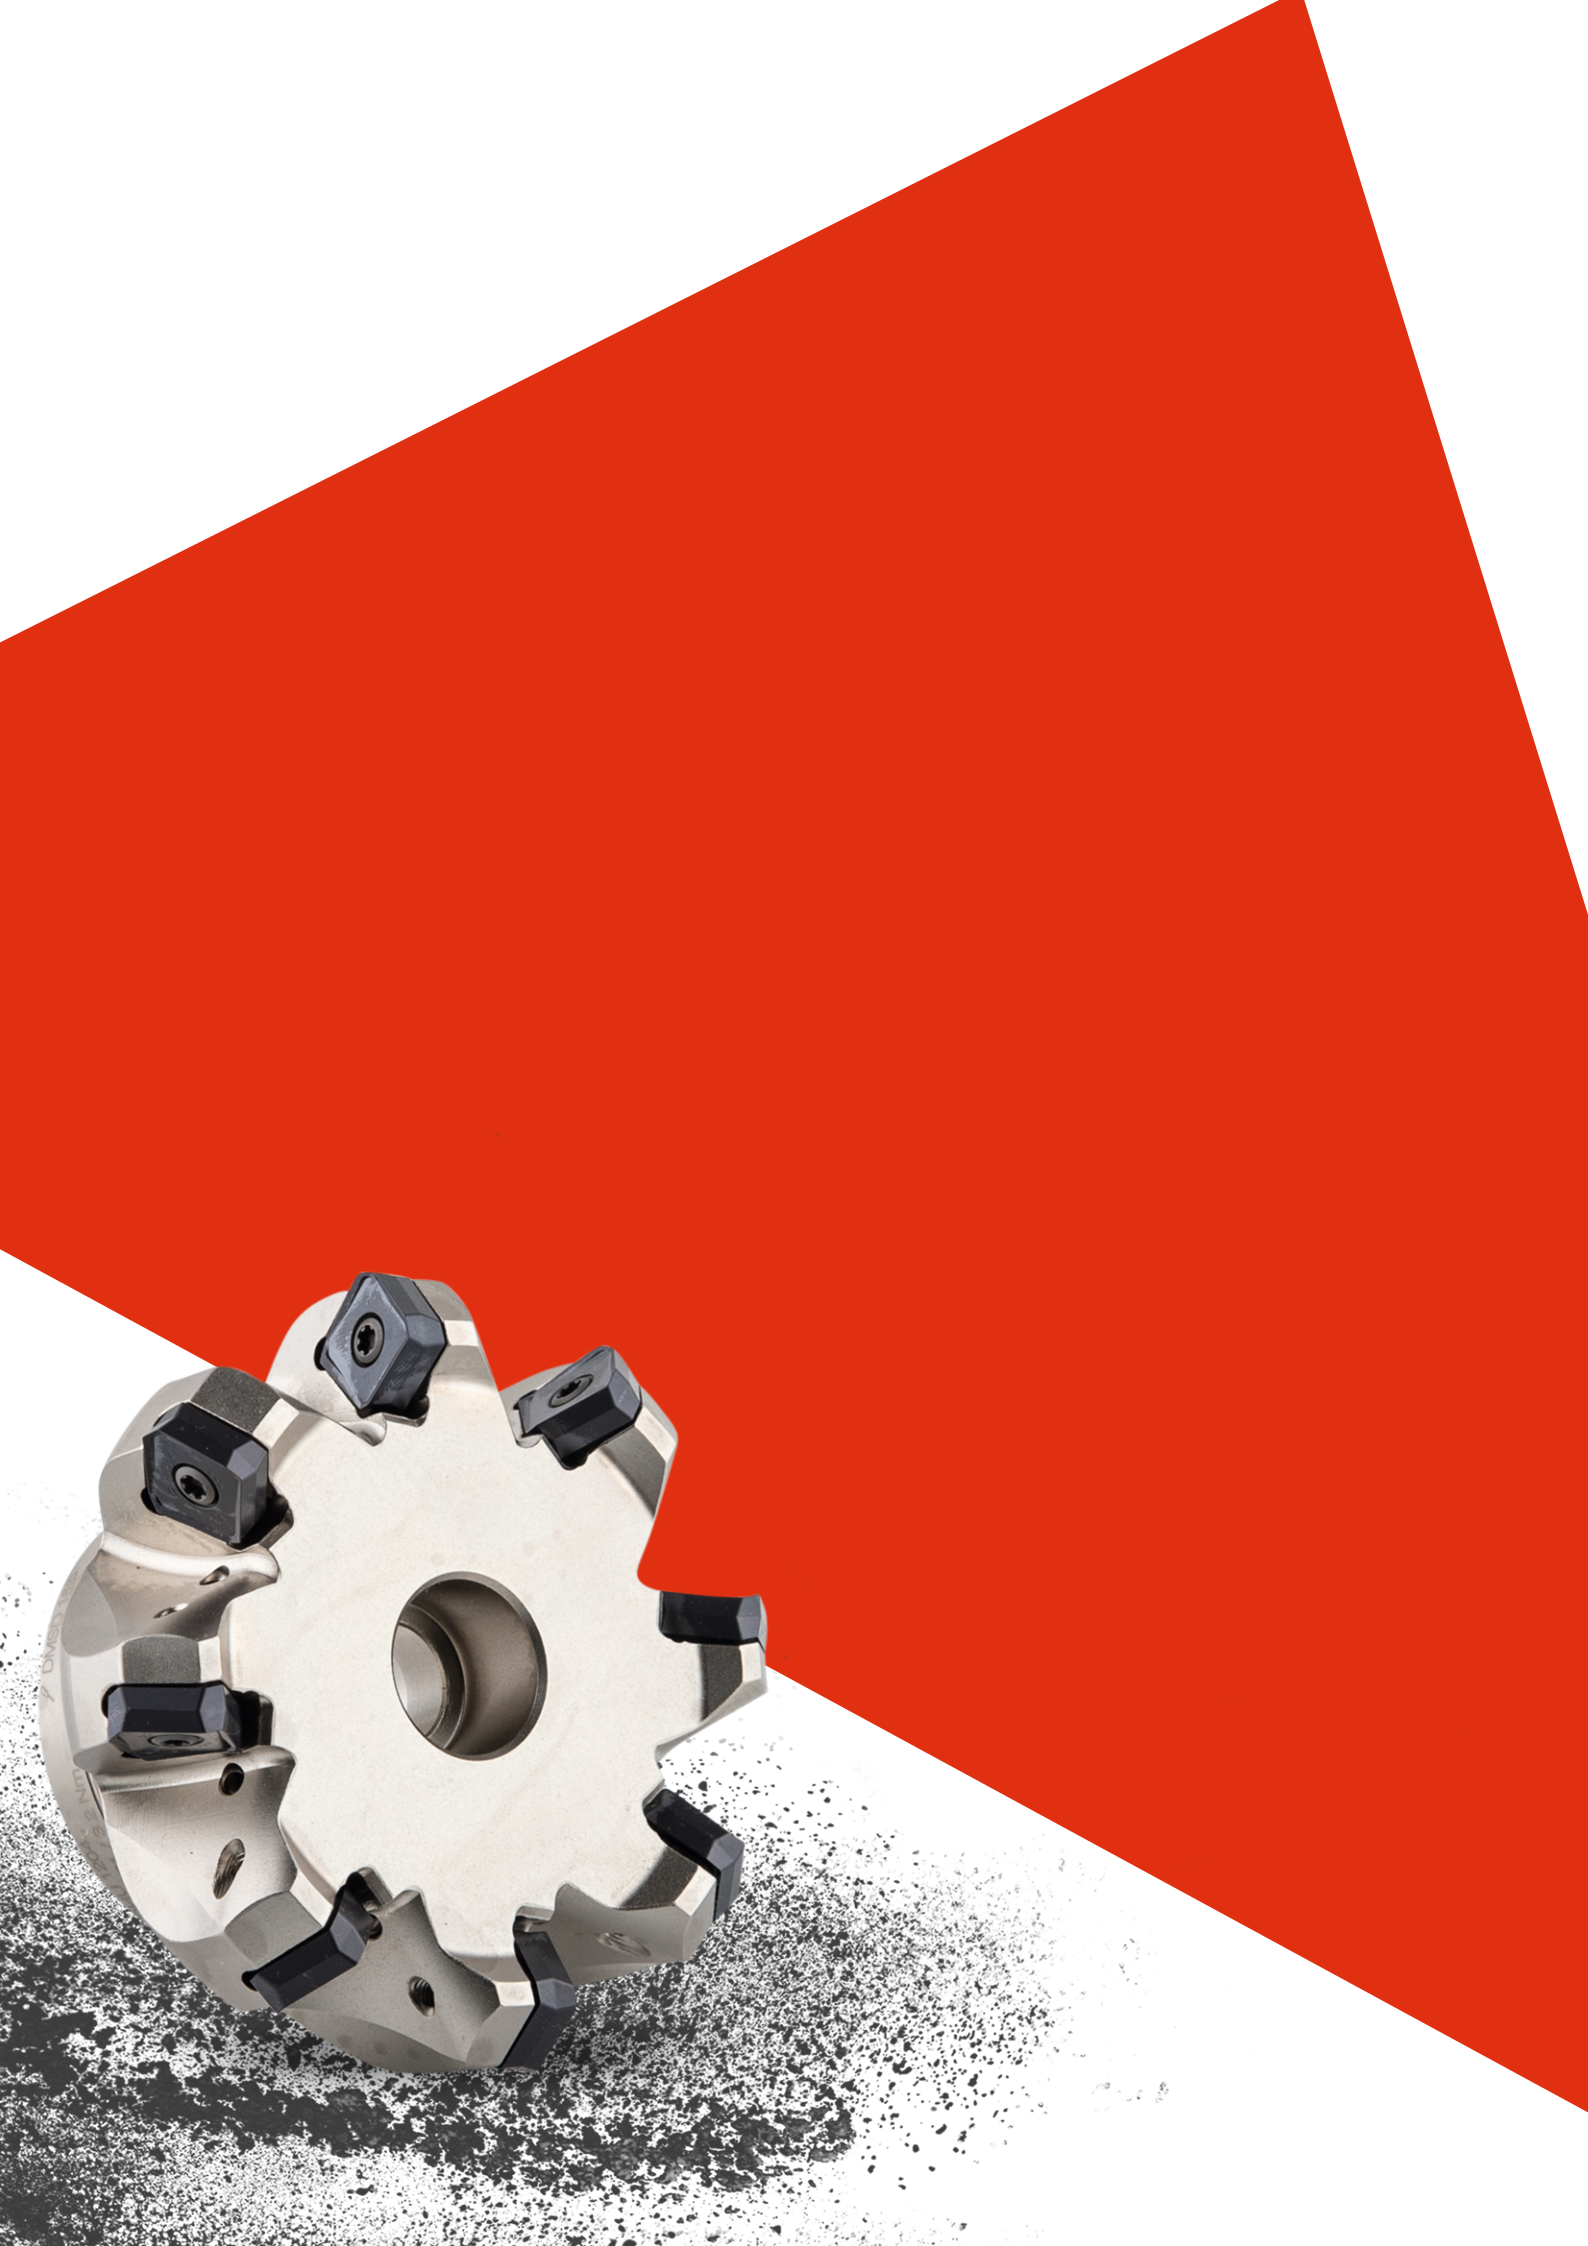

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

UP2DATE

Machining titanium the easy way!

MaxiMill – 211-DC with DirectCooling

Faster. Longer. Safer.

... ADDITIONAL PRODUCT HIGHLIGHTS

- **Cermet grade CTEP110-P:** Be amazed with our Coating update for finish turning
- Precise aluminum machining complex small components with the new **Micro milling cutters AluLine – Micro**

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

Welcome!

It couldn’t be easier

Ordering via the Online Shop

https://cuttingtools.ceratizit.com

On-site technical support

Your Local Technical Sales Engineer

Your customer number

Precision cooling strategy

with the additively manufactured
MaxiMill – 211-DC milling system

CERATIZIT

The ideal nozzle position for decisive added value when machining titanium and other heat-resistant materials

Want to achieve maximum process security despite high cutting speeds while working efficiently?

We offer you these exact advantages in a single tool – our 3D-printed MaxiMill – 211-DC indexable insert milling system manufactured here at CERATIZIT. The patented shoulder mill stands out for its decisive added value when machining titanium and other heat-resistant materials, thanks to an **optimum DirectCooling supply on the indexable insert flanks**. Because these materials in particular require the most effective possible cooling with emulsion to achieve a good machining result.

→ **from page 44**
You can find further information on the product here.

cts.ceratizit.com/ie/en/maximill-211-dc

CERATIZIT

The cool way to machine titanium alloys

Optimising the flank cooling system for machining titanium and super alloys was a top priority for the base body of the MaxiMill – 211-DC. So our developers at CERATIZIT came up with a concept that wouldn't have been possible with conventional machining processes. The aim was to deliver as much coolant as possible straight to the cutting edge. This called for a highly complex design that was feasible thanks to additive manufacturing.

3D-printed tool holder with perfectly positioned coolant channels

Advantage/benefit

- ▲ Optimum DirectCooling supply on the indexable insert flanks
- ▲ Indexable insert geometry and nozzle position perfectly tailored to DirectCooling

Less wear to indexable inserts → **Lowers tool costs**

Enables higher machining parameters → **Optimises production time**

The perfect combination: an ideal nozzle position with matching insert geometry

Produced with additive manufacturing, the base body of the milling cutter on the MaxiMill – 211-DC opens up scope for the complexity required for flank cooling. This creates the perfect combination of geometric and functional properties – the ideal nozzle position, paired with an **insert geometry that is precisely tailored** for cooling – guaranteeing full-coverage wetting of the coolant on the indexable insert cutting surface.

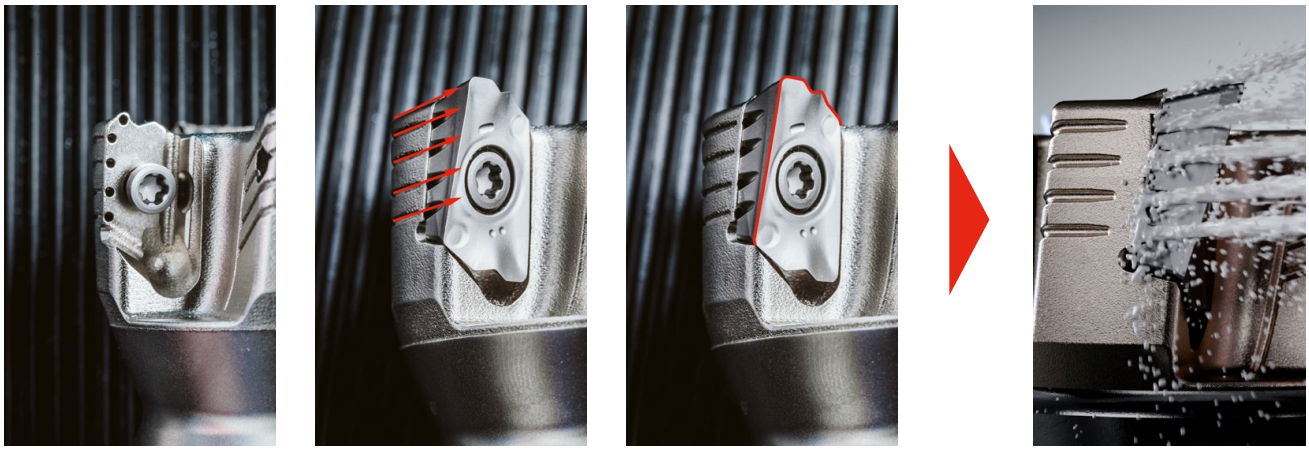

Test report: Service life [min] compared to standard tools

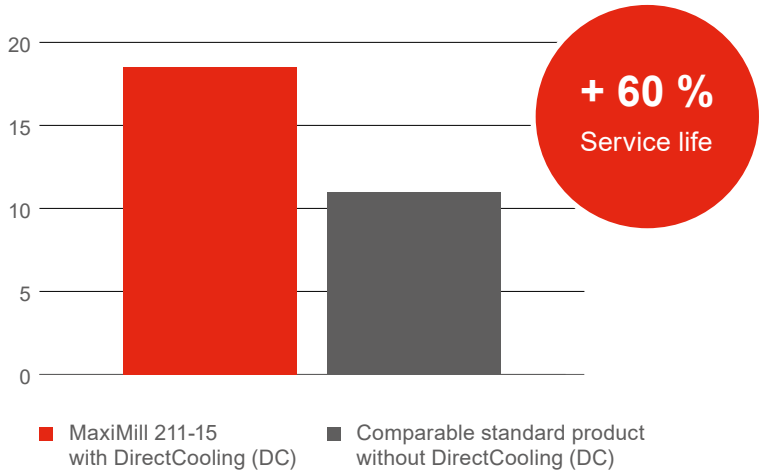

Machine:	GROB G1050
Workpiece:	TiAl6V4
Tool:	MaxiMill – 211-DC
v_c:	65 m/min.
a_p:	6 mm / a_e 18 mm / f_z 0,13 mm
Coolant pressure:	80 bar

Having that extra time on the service life really takes the pressure off for our customers when machining titanium and super alloys. Plus, they benefit from a reliable process – with significantly lower tool usage.

Manuel Höfferer, Application Manager Aerospace & Defence

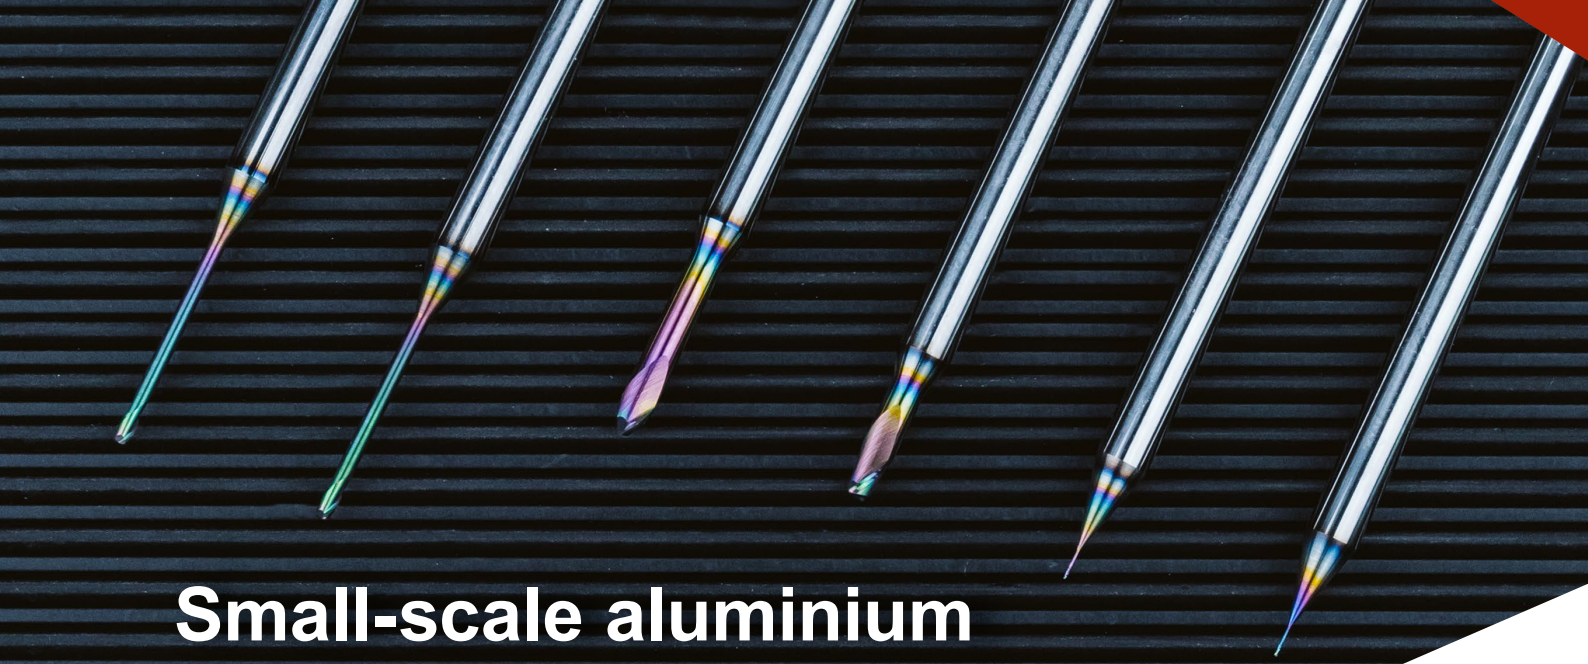

Small-scale aluminium machining

with AluLine – Micro

WNT

Micro cutter for complex micro components

AluLine – Micro: with DLC coating and minimal tolerances

Workpieces are getting smaller all the time – from the medtech sector, to the latest smartphones, through to elegant watch cases. This means the tools used to make these components are going miniature as well. So we decided to completely redesign the micro cutters in our AluLine – Micro range and adapt them to the industry's requirements.

→ from page 34
You can find further information on the product here.

cts.ceratizit.com/ie/en/aluline-micro

Advantages of the AluLine – Micro cutters

- ▲ Latest geometry
- ▲ Polish grinding for uniform cutting edges and optimal chip removal
- ▲ Wear-resistant, thin and ultra-smooth DLC coating
- ▲ Outstanding price-performance ratio
- ▲ Extensive, integrated range up to overhang lengths of 12xD
- ▲ Also suitable for shrinking with shank diameter of 4 mm
- ▲ Smallest tolerances, for maximum contour quality on the component (3 µm at diameter of 0.2 mm)

Large portfolio of micro tools for machining aluminium

We offer a range of tool variants for AluLine – Micro:

- ▲ Radius and torus cutters, plus end mills with corner chamfer
- ▲ Various shank versions and geometries
- ▲ Diameters ranging from 0.2 mm to 3.0 mm
- ▲ Overhang lengths from 3xD to 12xD

With this product range, CNC machinists can be confident they have the right tool for most micro-cutting jobs involving aluminium alloys, copper and other non-ferrous metals.

Corner chamfer

Full Radius

Torus

Cermet cutting material grades take finish turning to the next level

CERATIZIT

Coating update for cermet CTEP110-P grade

Cermet cutting inserts are a top choice for those looking to lower their costs when finishing steel. These cutting inserts are more heat-resistant than those made of carbide, so CNC Machinists can use higher cutting data and shorten their processes. Other stand-out features include dimensional accuracy and long service lives, especially when the cutting inserts are equipped with a powerful DRAGONSKIN coating including insert detection – which is exactly what the new cermet inserts from CERATIZIT do.

→ **from page 14**
You can find further information on the product here.

cts.ceratizit.com/ie/en/cermet-inserts

Why choose cermet?

Cermet offers a number of advantages over carbide in certain applications, creating the conditions for very high cutting speeds in combination with long service lives – while delivering extremely smooth surfaces on the workpiece.

Efficient production thanks to all-round package with optimised characteristics

Advantages of the CTEP110-P cermet cutting material with a new coating:

- ▲ Unique multilayer CVD coating
- ▲ Gold-coloured indicator layer for insert detection
- ▲ Improved texture and grain sizes of TiCN- & Al_2O_3layers
- ▲ Special post-treatment process
- ▲ Optimised chip breakers
- ▲ Perfect match between chip breakers and grade

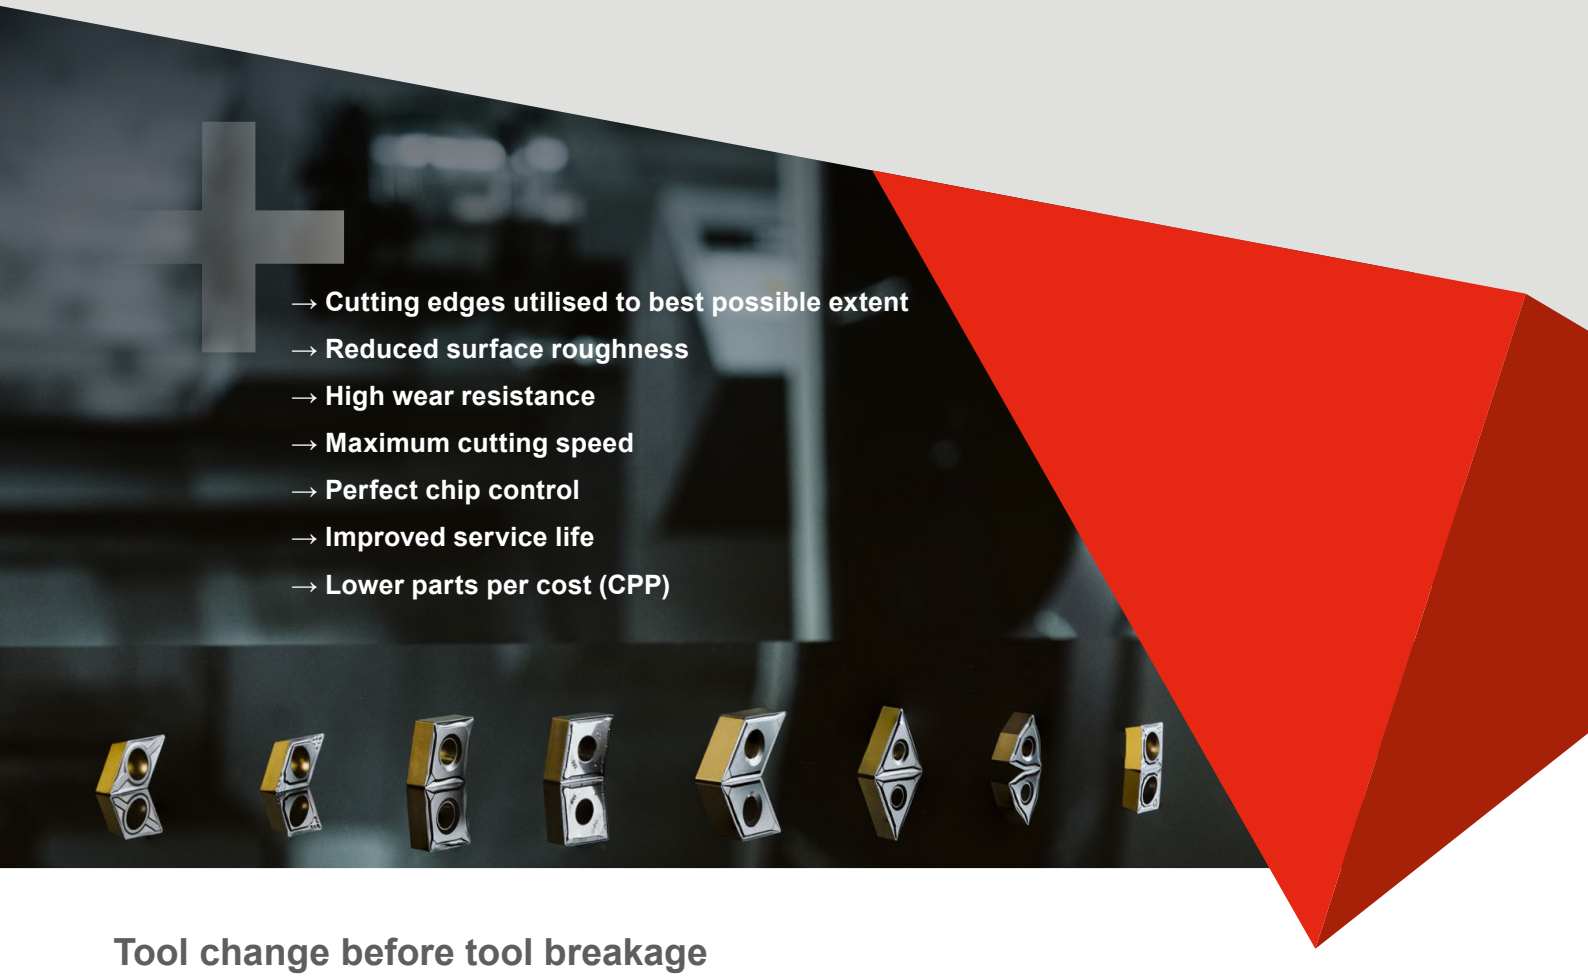

→ Cutting edges utilised to best possible extent
→ Reduced surface roughness
→ High wear resistance
→ Maximum cutting speed
→ Perfect chip control
→ Improved service life
→ Lower parts per cost (CPP)

Tool change before tool breakage

Thanks to the newly updated coating with insert detection, wear is more readily identified simply by taking a quick look at the cutting edges. This lets you utilise each individual cutting edge on the indexable insert to the best possible extent while avoiding tedious tool breakages.



Predecessor insert with coating / without insert detection



CTEP110-P with coating upgrade and insert detection

Table of contents

WNT	Solid carbide drilling
12+13	WTX Speed VA 8xD
CERATIZIT	Turning Tools
14–22	**CTEP110-P cermet indexable inserts**
23–25	ISO turning inserts
CERATIZIT	Grooving Tools
30–33	GX35 system
WNT	Solid Carbide milling cutters
34–42	**AluLine – Micro cutter**

Cermet indexable inserts
CTEP110-P

CERATIZIT Milling tools with indexable inserts

44–47	**MaxiMill – 211-DC**

CERATIZIT Adapters and accessories

48–53	HyPower – high pressure chucks
54–56	Shell mill adapter with reduced flange diameter
57–60	Cylindrical shank adapter (Weldon)
61	BMT tool holders

WNT Workpiece clamping

62	**CentriClamp – ZSG mini – clamping tower**
63	MNG mini – 4-sided clamping tower
64	Verso system jaws

Continue to the product pages

Shoulder milling system
MaxiMill – 211-DC

WTX – High Speed Drill, DIN 6537

- ▲ For corrosion and acid-resistant steels
- ▲ Developed for high cutting speeds
- ▲ Three guide lands for low friction

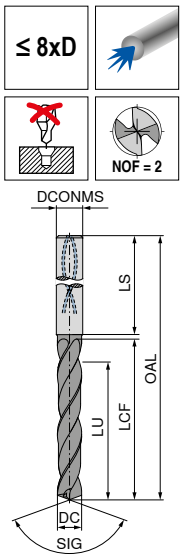

NEW

Speed VA

Ti800

SIG 135°

Solid carbide

DC h7 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	LS mm	10 701 ... EUR T4	
3,0	6	72	34	29	36	176,60	03000
3,1	6	72	34	29	36	176,60	03100
3,2	6	72	34	29	36	176,60	03200
3,3	6	72	34	29	36	176,60	03300
3,4	6	72	34	29	36	176,60	03400
3,5	6	72	34	29	36	176,60	03500
3,6	6	72	34	29	36	176,60	03600
3,7	6	72	34	29	36	176,60	03700
3,8	6	81	43	36	36	176,60	03800
3,9	6	81	43	36	36	176,60	03900
4,0	6	81	43	36	36	176,60	04000
4,1	6	81	43	36	36	176,60	04100
4,2	6	81	43	36	36	176,60	04200
4,3	6	81	43	36	36	176,60	04300
4,4	6	81	43	36	36	176,60	04400
4,5	6	81	43	36	36	176,60	04500
4,6	6	81	43	36	36	176,60	04600
4,8	6	95	57	48	36	176,60	04800
5,0	6	95	57	48	36	176,60	05000
5,1	6	95	57	48	36	176,60	05100
5,2	6	95	57	48	36	176,60	05200
5,3	6	95	57	48	36	176,60	05300
5,4	6	95	57	48	36	176,60	05400
5,5	6	95	57	48	36	176,60	05500
5,6	6	95	57	48	36	176,60	05600
5,7	6	95	57	48	36	176,60	05700
5,8	6	95	57	48	36	176,60	05800
5,9	6	95	57	48	36	176,60	05900
6,0	6	95	57	48	36	176,60	06000
6,1	8	114	76	64	36	215,00	06100
6,2	8	114	76	64	36	215,00	06200
6,3	8	114	76	64	36	215,00	06300
6,4	8	114	76	64	36	215,00	06400
6,5	8	114	76	64	36	215,00	06500
6,6	8	114	76	64	36	215,00	06600
6,8	8	114	76	64	36	215,00	06800
6,9	8	114	76	64	36	215,00	06900
7,0	8	114	76	64	36	215,00	07000
7,5	8	114	76	64	36	215,00	07500
7,8	8	114	76	64	36	215,00	07800
8,0	8	114	76	64	36	215,00	08000
8,1	10	142	95	80	40	280,50	08100
8,2	10	142	95	80	40	280,50	08200
8,3	10	142	95	80	40	280,50	08300
8,5	10	142	95	80	40	280,50	08500
8,8	10	142	95	80	40	280,50	08800
9,0	10	142	95	80	40	280,50	09000
9,3	10	142	95	80	40	280,50	09300
9,5	10	142	95	80	40	280,50	09500
9,8	10	142	95	80	40	280,50	09800
10,0	10	142	95	80	40	280,50	10000
10,2	12	162	114	96	45	382,20	10200
10,5	12	162	114	96	45	382,20	10500
10,8	12	162	114	96	45	382,20	10800
11,0	12	162	114	96	45	382,20	11000
11,5	12	162	114	96	45	382,20	11500
11,8	12	162	114	96	45	382,20	11800
12,0	12	162	114	96	45	382,20	12000
12,2	14	178	133	112	45	526,60	12200
12,5	14	178	133	112	45	526,60	12500
12,8	14	178	133	112	45	526,60	12800
13,0	14	178	133	112	45	526,60	13000
13,5	14	178	133	112	45	526,60	13500
13,8	14	178	133	112	45	526,60	13800
14,0	14	178	133	112	45	526,60	14000
14,5	16	203	152	128	48	697,00	14500
15,0	16	203	152	128	48	697,00	15000
15,5	16	203	152	128	48	697,00	15500
16,0	16	203	152	128	48	697,00	16000
16,5	18	222	171	144	48	958,30	16500
17,0	18	222	171	144	48	958,30	17000
17,5	18	222	171	144	48	958,30	17500
18,0	18	222	171	144	48	958,30	18000

	10 701 ...
P	●
M	●
K	●
N	○
S	●
H	
O	

→ v_c Page 13

Cutting data standard values – WTX – Speed VA

	Material sub-group	Index	Tensile strength N/mm²* / HB / HRC	10 701 ... with through coolant	8xD				
				v_c (m/min)	Ø 3–5	Ø 5–8	Ø 8–12	Ø 12–16	Ø 16–20
					f (mm/rev)				
P	Unalloyed steel	P.1.1	420 N/mm² / 125 HB	165	0,12	0,17	0,23	0,28	0,31
		P.1.2	640 N/mm² / 190 HB	160	0,11	0,16	0,22	0,26	0,30
		P.1.3	840 N/mm² / 250 HB	150	0,11	0,15	0,20	0,25	0,28
		P.1.4	910 N/mm² / 270 HB	145	0,10	0,15	0,19	0,24	0,27
		P.1.5	1010 N/mm² / 300 HB	135	0,10	0,14	0,18	0,23	0,26
	Low-alloy steel	P.2.1	610 N/mm² / 180 HB	165	0,14	0,20	0,27	0,33	0,37
		P.2.2	930 N/mm² / 275 HB	150	0,13	0,18	0,24	0,30	0,34
		P.2.3	1010 N/mm² / 300 HB	135	0,11	0,16	0,22	0,27	0,30
		P.2.4	1200 N/mm² / 375 HB	105	0,11	0,15	0,19	0,24	0,27
	High-alloy steel and high-alloy tool steel	P.3.1	680 N/mm² / 200 HB	115	0,11	0,16	0,22	0,27	0,30
		P.3.2	1100 N/mm² / 300 HB	90	0,10	0,13	0,18	0,22	0,25
		P.3.3	1300 N/mm² / 400 HB	90	0,08	0,11	0,14	0,17	0,19
	Stainless steel	P.4.1	680 N/mm² / 200 HB	70	0,08	0,11	0,14	0,18	0,20
		P.4.2	1010 N/mm² / 300 HB	70	0,08	0,11	0,14	0,18	0,20
M	Stainless steel	M.1.1	610 N/mm² / 180 HB	80	0,09	0,13	0,18	0,22	0,25
		M.2.1	300 HB	75	0,08	0,11	0,15	0,19	0,21
		M.3.1	780 N/mm² / 230 HB	75	0,08	0,11	0,15	0,19	0,21
K	Grey cast iron	K.1.1	350 N/mm² / 180 HB	150	0,15	0,24	0,33	0,41	0,47
		K.1.2	500 N/mm² / 260 HB	125	0,14	0,20	0,27	0,33	0,37
	Spherulitic graphite cast iron	K.2.1	540 N/mm² / 160 HB	200	0,15	0,22	0,31	0,38	0,43
		K.2.2	845 N/mm² / 250 HB	125	0,14	0,20	0,27	0,33	0,37
	Malleable iron	K.3.1	440 N/mm² / 130 HB	115	0,15	0,21	0,29	0,35	0,40
		K.3.2	780 N/mm² / 230 HB	100	0,12	0,17	0,23	0,28	0,32
N	Aluminium wrought alloy	N.1.1	60 HB						
		N.1.2	340 N/mm² / 100 HB						
	Cast aluminium alloy	N.2.1	250 N/mm² / 75 HB						
		N.2.2	300 N/mm² / 90 HB						
		N.2.3	440 N/mm² / 130 HB						
	Copper and copper alloys (bronze/brass)	N.3.1	375 N/mm² / 110 HB						
		N.3.2	300 N/mm² / 90 HB	145	0,14	0,20	0,27	0,33	0,37
		N.3.3	340 N/mm² / 100 HB						
	Magnesium alloys	N.4.1	70 HB						
S	Heat-resistant alloys	S.1.1	680 N/mm² / 200 HB	35	0,07	0,10	0,14	0,17	0,19
		S.1.2	950 N/mm² / 280 HB	25	0,05	0,07	0,10	0,12	0,14
		S.2.1	840 N/mm² / 250 HB	25	0,05	0,07	0,10	0,12	0,14
		S.2.2	1180 N/mm² / 350 HB	20	0,06	0,09	0,12	0,15	0,17
		S.2.3	1080 N/mm² / 320 HB	20	0,05	0,07	0,10	0,12	0,14
	Titanium alloys	S.3.1	400 N/mm²						
		S.3.2	1050 N/mm² / 320 HB	35	0,08	0,11	0,15	0,18	0,20
		S.3.3	1400 N/mm² / 410 HB	30	0,06	0,09	0,12	0,15	0,17
H	Hardened steel	H.1.1	46–55 HRC						
		H.1.2	56–60 HRC						
		H.1.3	61–65 HRC						
		H.1.4	66–70 HRC						
	Chilled iron	H.2.1	400 HB						
	Hardened cast iron	H.3.1	55 HRC						
O	Non-metal materials	O.1.1	≤ 150 N/mm²						
		O.1.2	≤ 100 N/mm²						
		O.2.1	≤ 1000 N/mm²						
		O.2.2	≤ 1000 N/mm²						
		O.3.1							

* Tensile strength

The cutting data depends extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced according to the application conditions.

CNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
CNMG 1204..	12,9	4,76	5,16	12,7



CNMG

NEW NEW

-CF20 CTEP110-P | -TFQ CTEP110-P

DRAGONSKIN



F F

CERMET CNMG | CERMET CNMG

76 101 ... | 76 110 ...

ISO	RE	EUR 1A/78		EUR 1A/78	
	mm				
120404EN	0,4	13,29	**02801**	15,45	**02801**
120408EN	0,8	13,29	**03001**	15,45	**03001**
120412EN	1,2			15,45	**03201**
P			●		●
M			○		○
K			○		○
N					
S					
H					
O					

DNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
DNMG 1104..	11,6	4,76	3,81	9,52
DNMG 1506..	15,5	6,35	5,16	12,70



DNMG

NEW

-CF20
CTEP110-P

DRAGONSKIN



F
CERMET
DNMG

76 102 ...

NEW

-TFQ
CTEP110-P

DRAGONSKIN



F
CERMET
DNMG

76 153 ...

ISO	RE	EUR		EUR	
	mm	1A/78		1A/78	
110404EN	0,4	16,02	**00401**		
110408EN	0,8	16,02	**00601**		
150604EN	0,4	21,03	**02801**	23,38	**02801**
150608EN	0,8	21,03	**03001**	23,38	**03001**
150612EN	1,2	21,03	**03201**		

P	●	●
M	○	○
K	○	○
N		
S		
H		
O		

TNMG

Designation	L mm	S mm	D1 mm	IC mm
TNMG 1604..	16,5	4,76	3,81	9,52



TNMG

NEW

-CF20
CTEP110-P

DRAGONSKIN

F
CERMET
TNMG

76 149 ...

ISO	RE mm	EUR 1A/78	
160404EN	0,4	13,29	01601
160408EN	0,8	13,29	01801
160412EN	1,2	13,29	02001

P	●
M	○
K	○
N	
S	
H	
O	

WNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
WNMG 0604..	6,5	4,76	3,81	9,52
WNMG 0804..	8,6	4,76	5,16	12,70



WNMG

NEW

-CF20
CTEP110-P

DRAGONSKIN

F
CERMET
WNMG

76 171 ...

NEW

-TFQ
CTEP110-P

DRAGONSKIN



F
CERMET
WNMG

76 177 ...

ISO	RE	EUR 1A/78		EUR 1A/78	
	mm				
060404EN	0,4	12,73	**00401**		
060408EN	0,8	12,73	**00601**	15,14	**00601**
080404EN	0,4			18,95	**01601**
080408EN	0,8	16,47	**01801**	18,95	**01801**
P		●		●	
M		○		○	
K		○		○	
N					
S					
H					
O					

CCGT / CCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CC.T 0602..	6,4	2,38	2,8	6,35
CC.T 09T3..	9,7	3,97	4,4	9,52
CC.T 1204..	12,9	4,76	5,5	12,70



CCGT / CCMT

NEW NEW

-CF05 CTEP110-P | -CF55 CTEP110-P

DRAGONSKIN | DRAGONSKIN

F F

CERMET CCGT | CERMET CCMT

76 247 ... | 76 248 ...

ISO	RE	EUR 1A/78		EUR 1A/78	
	mm				
060202EN	0,2	18,22	00201		
060204EN	0,4	18,22	00401	9,91	00401
09T302EN	0,2	19,41	01401		
09T304EN	0,4	19,41	01601	12,73	01601
09T308EN	0,8	19,41	01801	12,73	01801
120404EN	0,4	24,31	02001	17,96	02801
P		●		●	
M		○		○	
K		○		○	
N					
S					
H					
O					

DCGT / DCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
DC.T 0702..	7,75	2,38	2,8	6,35
DC.T 11T3..	11,60	3,97	4,4	9,52



DCGT / DCMT

		NEW	NEW
		-CF05 CTEP110-P	-CF55 CTEP110-P
		DRAGONSKIN	DRAGONSKIN
			
		F	F
		CERMET DCGT	CERMET DCMT
		76 245 ...	76 246 ...
ISO	RE mm	EUR 1A/78	EUR 1A/78
070201EN	0,1	18,22 00101	
070202EN	0,2	18,22 00201	10,34 00201
070204EN	0,4	18,22 00401	10,34 00401
11T302EN	0,2	24,12 01401	
11T304EN	0,4	24,12 01601	14,34 01601
11T308EN	0,8	24,12 01801	14,34 01801
P		●	●
M		○	○
K		○	○
N			
S			
H			
O			

SCGT / SCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
SC.T 09T3..	9,52	3,97	4,4	9,52



SCGT / SCMT

NEW
-CF05
CTEP110-P
DRAGONSKIN

F
CERMET
SCGT
76 261 ...

NEW
-CF55
CTEP110-P
DRAGONSKIN



F
CERMET
SCMT
76 260 ...

ISO	RE		EUR 1A/78		EUR 1A/78	
	mm					
09T304EN	0,4		19,86	00401	12,73	00401
09T308EN	0,8		19,86	00601	12,73	00601
P			●		●	
M			○		○	
K			○		○	
N						
S						
H						
O						

TCGT / TCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
TC.T 1102..	11,0	2,38	2,8	6,35
TC.T 16T3..	16,5	3,97	4,4	9,52



TCGT / TCMT

NEW
-CF05
CTEP110-P
DRAGONSKIN

F
CERMET
TCGT
76 272 ...

NEW
-CF55
CTEP110-P
DRAGONSKIN

F
CERMET
TCMT
76 266 ...

ISO	RE	EUR		EUR	
	mm	1A/78		1A/78	
110202EN	0,2	17,80	01401		
110204EN	0,4	17,80	01601	10,14	01601
110208EN	0,8	17,80	01801		
16T304EN	0,4	22,55	02801		
16T308EN	0,8			14,07	03001
P		●		●	
M		○		○	
K		○		○	
N					
S					
H					
O					

VCGT / VCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
VC.T 1103..	11,1	3,18	2,9	6,35
VC.T 1604..	16,6	4,76	4,4	9,52



VCGT / VCMT

NEW NEW

-CF05 CTEP110-P | -CF55 CTEP110-P

DRAGONSKIN



F F

CERMET VCGT | CERMET VCMT

76 276 ... | 76 292 ...

ISO	RE	EUR 1A/78		EUR 1A/78	
	mm				
110301EN	0,1	22,08	01201		
110302EN	0,2	22,08	01401		
110304EN	0,4	22,08	01601	17,14	01601
160404EN	0,4	26,33	02801	21,03	02801
160408EN	0,8	26,33	03001	21,03	03001
P		●		●	
M		○		○	
K		○		○	
N					
S					
H					
O					

RCMT

Designation	S mm	D1 mm	IC mm
RCMT 0803..	3,18	3,4	8



RCMT

NEW

-M23
CTCP115-P

DRAGONSKIN

M
RCMT
74 121 ...

ISO	RE mm	EUR 1A/08	
0803M0SN	4	8,66	21300

P	●
M	
K	○
N	
S	
H	
O	

TCGT

Designation	L mm	S mm	D1 mm	IC mm
TCGT 16T3..	16,5	3,97	4,4	9,52



TCGT

-27
CTPX715

DRAGONSKIN

M
TCGT

70 276 ...

ISO	RE mm	EUR 1A/90	
16T302FN	0,2	20,01	72600

P	●
M	●
K	○
N	●
S	●
H	
O	○

VCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
VCGT 1604..	16,6	4,76	4,4	9,52



VCGT

		-25P CTPX710		-27 CTPX715	
		DRAGONSKIN		DRAGONSKIN	
					
		M		M	
		VCGT		VCGT	
		70 282 ...		70 280 ...	
ISO	RE mm	EUR 1A/90		EUR 1A/90	
160402FN	0,2	28,23	72600	26,91	72600
160412FN	1,2			26,91	73200
P		●		●	
M		●		●	
K				○	
N		●		●	
S		●		●	
H					
O				○	

	Material sub-group	Index	Tensile strength N/mm²* / HB / HRC	CTEP110-P DRAGONSKIN		CTCP115-P	CTPX710 -25P DRAGONSKIN	CTPX715 -27 DRAGONSKIN
P	Unalloyed steel	P.1.1	420 N/mm² / 125 HB	500	P.1.1	370	340	275
		P.1.2	640 N/mm² / 190 HB	440	P.1.2	315	300	235
		P.1.3	840 N/mm² / 250 HB	380	P.1.3	270	260	200
		P.1.4	910 N/mm² / 270 HB	360	P.1.4	250	250	190
		P.1.5	1010 N/mm² / 300 HB	330	P.1.5	230	235	170
	Low-alloy steel	P.2.1	610 N/mm² / 180 HB	450	P.2.1	325	300	240
		P.2.2	930 N/mm² / 275 HB	360	P.2.2	250	250	185
		P.2.3	1010 N/mm² / 300 HB	330	P.2.3	230	235	170
		P.2.4	1200 N/mm² / 375 HB	250	P.2.4	170	190	125
	High-alloy steel and high-alloy tool steel	P.3.1	680 N/mm² / 200 HB	380	P.3.1	200	150	140
		P.3.2	1100 N/mm² / 300 HB	310	P.3.2	140	95	80
		P.3.3	1300 N/mm² / 400 HB	230	P.3.3	85	35	25
	Stainless steel	P.4.1	680 N/mm² / 200 HB	380	P.4.1	200	155	140
		P.4.2	1010 N/mm² / 300 HB	340	P.4.2	170	130	110
M	Stainless steel	M.1.1	610 N/mm² / 180 HB	380	M.1.1		150	140
		M.2.1	300 HB		M.2.1		90	80
		M.3.1	780 N/mm² / 230 HB		M.3.1		130	120
K	Grey cast iron	K.1.1	350 N/mm² / 180 HB	450	K.1.1	255		200
		K.1.2	500 N/mm² / 260 HB	340	K.1.2	235		160
	Spherulitic graphite cast iron	K.2.1	540 N/mm² / 160 HB	480	K.2.1	270		190
		K.2.2	845 N/mm² / 250 HB	380	K.2.2	205		150
	Malleable iron	K.3.1	440 N/mm² / 130 HB	460	K.3.1	250		210
		K.3.2	780 N/mm² / 230 HB	280	K.3.2	210		180
N	Aluminium wrought alloy	N.1.1	60 HB		N.1.1		1840	1750
		N.1.2	340 N/mm² / 100 HB		N.1.2		1600	1500
	Cast aluminium alloy	N.2.1	250 N/mm² / 75 HB		N.2.1		1250	1200
		N.2.2	300 N/mm² / 90 HB		N.2.2		1250	1200
		N.2.3	440 N/mm² / 130 HB		N.2.3		750	700
	Copper and copper alloys (bronze/brass)	N.3.1	375 N/mm² / 110 HB		N.3.1		650	625
		N.3.2	300 N/mm² / 90 HB		N.3.2		630	600
		N.3.3	340 N/mm² / 100 HB		N.3.3		500	475
	Magnesium alloys	N.4.1	70 HB		N.4.1		340	325
S	Heat-resistant alloys	S.1.1	680 N/mm² / 200 HB		S.1.1		110	40
		S.1.2	950 N/mm² / 280 HB		S.1.2		85	30
		S.2.1	840 N/mm² / 250 HB		S.2.1		75	30
		S.2.2	1180 N/mm² / 350 HB		S.2.2		45	25
		S.2.3	1080 N/mm² / 320 HB		S.2.3		45	20
	Titanium alloys	S.3.1	400 N/mm²		S.3.1		100	110
		S.3.2	1050 N/mm² / 320 HB		S.3.2		60	70
		S.3.3	1400 N/mm² / 410 HB		S.3.3		45	50
H	Hardened steel	H.1.1	46–55 HRC		H.1.1			
		H.1.2	56–60 HRC		H.1.2			
		H.1.3	61–65 HRC		H.1.3			
		H.1.4	66–70 HRC		H.1.4			
	Chilled iron	H.2.1	400 HB		H.2.1			
	Hardened cast iron	H.3.1	55 HRC		H.3.1			
O	Non-metal materials	O.1.1	≤ 150 N/mm²		O.1.1			140
		O.1.2	≤ 100 N/mm²		O.1.2			
		O.2.1	≤ 1000 N/mm²		O.2.1			150
		O.2.2	≤ 1000 N/mm²		O.2.2			
		O.3.1			O.3.1			

* Tensile strength

Standard chip breakers / application notes

Negative

Main application steel and cast iron, secondary application stainless steels	Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-CF / -CF20 ▲ Fine finishing ▲ Sharp cutting edge for low cutting forces ▲ Good chip control even at small depths of cut	 F	**CTEP110-P / TCM10** CTEP110-P / TCM10 CTEP110-P / TCM10			 0,30–1,50	0,07–0,25	CN.. DN.. TN.. WN..
-TFQ ▲ Wiper geometry ▲ Finishing to medium machining ▲ Very high feeds ▲ High surface quality	 F	**CTEP110-P / CTCP115-P** CTEP110-P CTEP110-P / CTCP115-P	**CTCP115-P / CTCP125-P** CTCP115-P / CTCP125-P		 0,50–5,00	0,10–0,60	CN.. DN.. WN..

Positive

Main application steel and cast iron, secondary application stainless steels and super alloys	Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration a_p mm	Sectional illustration f mm	Geometry
-CF05 ▲ Fine finishing ▲ For all common steel materials, stainless steels and GGG ▲ Good swarf control ▲ High surface quality	 F	**CTEP110-P / TCM407** CTEP110-P CTEP110-P	TCM10 / TCM407 TCM10 / TCM407		 0,20–1,30	0,06–0,25	CC.. DC.. SC.. TC.. VC..
-CF55 ▲ Finishing to medium machining ▲ Suitable for general and stainless steels ▲ Low cutting forces ▲ Good swarf control ▲ High surface quality	 F M	**CTEP110-P** CTEP110-P CTEP110-P	**TCM10** / CTEP110-P CTEP110-P CTEP110-P		 0,20–1,30	0,06–0,25	CC.. DC.. SC.. TC.. VC..

Standard chip breakers / application notes

Positive

Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration		Geometry
				a_p mm	f mm	

Main application steel and cast iron, secondary application stainless steels and super alloys

-M23

▲ Soft cutting geometry with outstanding chip breaking behaviour at low cutting depths in finish machining



F
M

Smooth cut	Irregular cutting depth	Interrupted cut
CTCP115-P / CTCP125-P	**CTCP125-P**	**CTCP125-P**
CTCP115-P / CTCP125-P	CTCP125-P	CTCP125-P



a_p mm	f mm	Geometry
0,30–4,0	1,0–0,45	RC..

Positive

Main application non-ferrous metals, secondary application stainless steels, steels, super alloys, cast iron

-25P

▲ Sharp cutting edge
▲ Good swarf control on soft aluminium alloys
▲ Low adhesion



F

Smooth cut	Irregular cutting depth	Interrupted cut
CTPX710	CTPX710	
CTPX710	CTPX710	
CTPX710 / H216T	**CTPX710 / H216T**	**CTPX710 / H216T**
CTPX710	CTPX710	
CTPX710	CTPX710	



a_p mm	f mm	Geometry
0,50–4,50	0,05–0,60	CC.. DC.. SC.. VC..

-27

▲ The universal Alu geometry
▲ Sharp cutting edge
▲ Extremely positive rake angle
▲ Low adhesion
▲ High feed rates



M
R

Smooth cut	Irregular cutting depth	Interrupted cut
CTPX715	CTPX715	
CTPX715	CTPX715	
CTPX715 / H216T	CTPX715 / H216T	
CTPX715 / H216T	**CTPX715 / H216T**	**CTPX715 / H216T**
CTPX715	CTPX715	
CTPX715 / H216T	CTPX715 / H216T	CTPX715 / H216T



a_p mm	f mm	Geometry
1,00–10,00	0,10–0,75	CC.. DC.. RC.. SC.. TC.. VC..

Grade description

CTEP110-P



ISO | **P10** | M10 | K05

Specifications:
Composition: Co/Ni 12.2%; additives 26.4%; Ti(C,N) balance | Grain size: 0.8-1.0 µm | Hardness: HV_{30} 1650 | Layer system: CVD TiCN-Al_2O_3 + TiN cover layer

Recommended use:
Coated cermet grade with reserves of toughness for finish machining at high cutting speeds.

CTCP115-P



ISO | **P15** | K25

Specification:
Composition: Co 5.5%; mixed carbides 6.4%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1530 | Layer system: CVD TiCN-Al_2O_3

Usage recommendation:
The wear-resistant high-performance grade for steel machining with stable conditions and a continuous cut.

CTPX710



ISO | **P10 | M10** | K10 | **N10 | S15**

Specification:
Composition: Co 6.0%; WC balance | Grain size: 0.8 µm | Hardness: HV_{30} 1820 | Layer system: PVD AlTiN

Usage recommendation:
The universal carbide grade for the most demanding machining requirements on multiple materials.

CTPX715



ISO | **P15 | M15** | K15 | **N15 | S20** | O10

Specification:
Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV_{30} 1650 | Layer system: PVD AlTiN

Usage recommendation:
The universal carbide grade for the most demanding machining requirements on multiple materials.

C T C P 1 2 5 -P (Example)

CT
CERATIZIT

-P
Performance

Degree of hardness

05	ISO 05
10	ISO 10
15	ISO 15
20	ISO 20
25	ISO 25
30	ISO 30
35	ISO 35
40	ISO 40

Application

1	Turning
2	Milling
3	Grooving
4	Drilling
5	Thread turning
6	Others
7	Several processes

Main application – material

P	Steel
M	Stainless steel
K	Cast iron
N	Non-ferrous metals
S	Heat-resistant
H	Tempered steel
O	Non-metal materials
X	Universal application

Coating

W	Uncoated carbide
C	CVD-coated carbide
P	PVD-coated carbide
T	Cermet, uncoated
E	Cermet, coated
N	Silicon nitride, uncoated
M	Silicon nitride, coated
S	Mixed ceramic
K	Whisker ceramic
I	SiAlON
D	PDC
B	PcBN
H	HSS sintered

Insert GX 35

▲ For parting and grooving



F	M	R

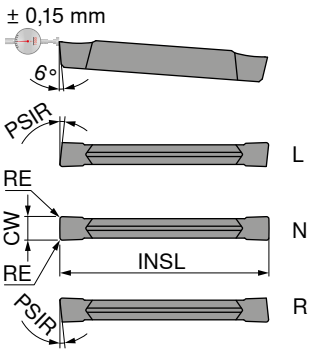

NEW
-M1
CTCP325
DRAGONSKIN

NEW
-M1
CTP1340
DRAGONSKIN



Designation	IH	INSL mm	CW +/-0,15 mm	RE +/-0,15 mm	PSIR °	for tool holder	70 390 ... EUR 1C/72		70 390 ... EUR 1C/72	
GX 35-E3.00 L 6	L	35	3	0,2	6	-GX35	21,50	**92300**	21,50	**62300**
GX 35-E3.00 N 0.20	N	35	3	0,2		-GX35	21,50	**93300**	21,50	**63300**
GX 35-E3.00 R 6	R	35	3	0,2	6	-GX35	21,50	**94300**	21,50	**64300**

P	●	●
M	○	●
K	●	●
N		○
S	○	●
H		
O		○

→ v_c Page 33

Note: reduce feed rate by 20–50 % with R/L version!
→ **Page 33**

MonoClamp – Radial Monoholder GX-DC 35

Scope of supply:
Mono holder incl. key and clamping screw

Direct Cooling

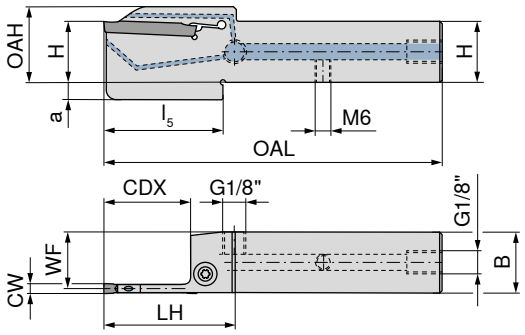

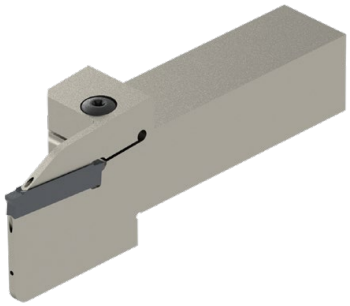

Illustrations show right-hand versions

												NEW Left-hand		NEW Right-hand	
												70 869 ...		**70 869 ...**	
ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	CDX mm	a mm	for grooving inserts	**EUR** 2C/71		**EUR** 2C/71	
E20 R/L 0034S3-2020X-S-DC-GX35	20	20	3	18,75	31	117	55	48	34	10	GX 35-E3.00	225,00	**32001**	225,00	**32000**
E25 R/L 0034S3-2525X-S-DC-GX35	25	25	3	23,75	36	132	55	48	34	10	GX 35-E3.00	235,00	**32501**	235,00	**32500**

Key D

Clamping screw

			80 950 ...		**70 950 ...**	
Spare parts for grooving inserts		**EUR** Y7			**EUR** 2A/28	
GX 35-E3.00	T20 - IP	16,17	**129**	M6x22 - 20IP	13,74	**92200**

→ **Chapter 16 Adapters and accessories**
Here you will find the suitable base adaptors.

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data values for grooving inserts

Index	GX	
	CTCP325	CTP1340
	DRAGONSKIN	
	v_c (m/min)	
P.1.1	220	180
P.1.2	195	150
P.1.3	170	125
P.1.4	165	115
P.1.5	150	100
P.2.1	200	155
P.2.2	160	110
P.2.3	150	100
P.2.4	120	70
P.3.1	150	110
P.3.2	95	75
P.3.3	45	40
P.4.1	150	110
P.4.2	125	95
M.1.1	150	110
M.2.1	95	80
M.3.1	135	100
K.1.1	170	150
K.1.2	150	125
K.2.1	160	140
K.2.2	145	120
K.3.1	210	170
K.3.2	140	120
N.1.1		300
N.1.2		200
N.2.1		300
N.2.2		200
N.2.3		150
N.3.1		300
N.3.2		300
N.3.3		200
N.4.1		200
S.1.1	35	35
S.1.2	30	30
S.2.1	20	20
S.2.2	15	15
S.2.3	15	15
S.3.1		85
S.3.2		40
S.3.3		30
H.1.1		
H.1.2		
H.1.3		
H.1.4		
H.2.1		
H.3.1		
O.1.1		130
O.1.2		
O.2.1		105
O.2.2		
O.3.1		

GX-M1	
Groove width CW (mm)	 Parting / Grooving
	Feed rate f (mm/rev.)
3	0,10–0,20

References for Parting off



From Ø 5 mm on, reduce feed “f“ by approx. 50 %. No parting across centre (risk of breakage).



For parting pip-free, use R or L inserts. In order to minimize lateral deflection reduce feed by approx. 20–50 %.



In order to prevent ring formation, use R or L inserts. Reduce feed “f“ because of lateral deflection by approx. 20–50 %.

References for grooving



When grooving with an axial displacement the width „a“ should amount to at least 70 % of the grooving width „CW“.



When grooving oblique surfaces the feed should be reduced by approx. 20–50 % until fully engaged.

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

AluLine – Micro-end milling cutter

The specialist for machining non-ferrous metals

▲ T_x = maximum engagement depth



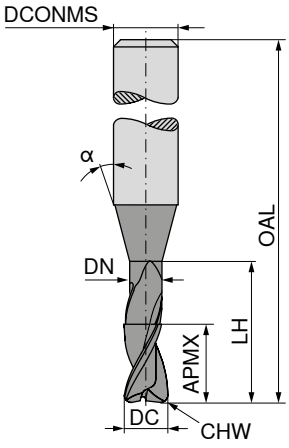

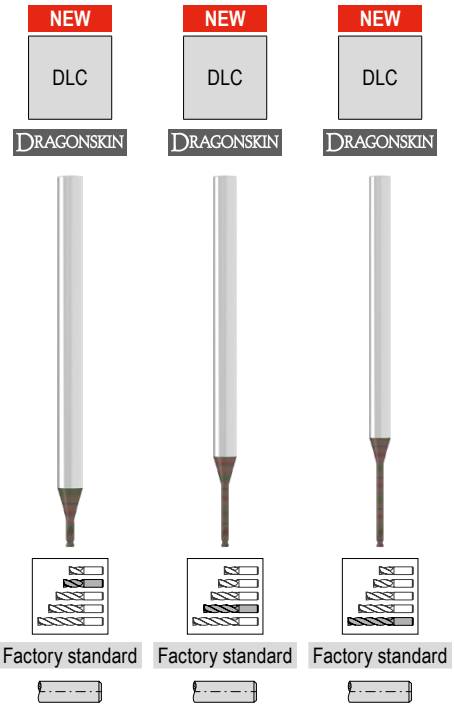

Factory standard | Factory standard | Factory standard

DC -0,01	APMX	DN	LH	OAL	LPR	α°	DCONMS h5	T_X	CHW	ZEFP	53 900 ... EUR V1/5B		53 900 ... EUR V1/5B		53 900 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm		mm		mm							
0,2	0,2	0,18	0,6	45	17	15	4	3 x DC	0,02	2	69,92	**02101**				
0,2	0,2	0,18	1,0	45	17	15	4	5 x DC	0,02	2	69,92	**02201**				
0,2	0,2	0,18	1,6	45	17	15	4	8 x DC	0,02	2			77,83	**02301**		
0,2	0,2	0,18	2,0	50	22	15	4	10 x DC	0,02	2			69,92	**02401**		
0,3	0,3	0,28	0,9	45	17	15	4	3 x DC	0,03	2	69,92	**03101**				
0,3	0,3	0,28	1,5	45	17	15	4	5 x DC	0,03	2	77,19	**03201**				
0,3	0,3	0,28	2,4	50	22	15	4	8 x DC	0,03	2			69,92	**03301**		
0,3	0,3	0,28	3,0	50	22	15	4	10 x DC	0,03	2			69,92	**03401**		
0,4	0,4	0,37	1,2	45	17	15	4	3 x DC	0,04	2	64,23	**04101**				
0,4	0,4	0,37	2,0	45	17	15	4	5 x DC	0,04	2	64,23	**04201**				
0,4	0,4	0,37	3,2	50	22	15	4	8 x DC	0,04	2			64,23	**04301**		
0,4	0,4	0,37	4,0	50	22	15	4	10 x DC	0,04	2			64,23	**04401**		
0,5	0,5	0,45	1,5	45	17	15	4	3 x DC	0,05	2	53,95	**05101**				
0,5	0,5	0,45	1,5	45	17	15	3	3 x DC	0,05	2	53,95	**05100**				
0,5	0,5	0,45	2,5	45	17	15	4	5 x DC	0,05	2	53,95	**05201**				
0,5	0,5	0,45	2,5	45	17	15	3	5 x DC	0,05	2	53,95	**05200**				
0,5	0,5	0,45	4,0	45	17	15	3	8 x DC	0,05	2			53,95	**05300**		
0,5	0,5	0,45	4,0	50	22	15	4	8 x DC	0,05	2			53,95	**05301**		
0,5	0,5	0,45	5,0	50	22	15	3	10 x DC	0,05	2			53,95	**05400**		
0,5	0,5	0,45	5,0	50	22	15	4	10 x DC	0,05	2			53,95	**05401**		
0,6	0,6	0,58	2,0	45	17	15	4	3,3 x DC	0,06	2	53,95	**06101**				
0,6	0,6	0,58	3,0	50	22	15	4	5 x DC	0,06	2	53,95	**06201**				
0,6	0,6	0,58	5,0	50	22	15	4	8,3 x DC	0,06	2			68,24	**06301**		
0,6	0,6	0,58	6,0	50	22	15	4	10 x DC	0,06	2			53,95	**06401**		
0,8	0,8	0,77	2,5	45	17	15	4	3,1 x DC	0,08	2	53,95	**08101**				
0,8	0,8	0,77	4,0	50	22	15	4	5 x DC	0,08	2	53,95	**08201**				
0,8	0,8	0,77	6,5	50	22	15	4	8,1 x DC	0,08	2			53,95	**08301**		
0,8	0,8	0,77	8,0	50	22	15	4	10 x DC	0,08	2			53,95	**08401**		
1,0	1,0	0,95	3,0	45	17	15	4	3 x DC	0,10	2	51,20	**10101**				
1,0	1,0	0,95	3,0	45	17	15	3	3 x DC	0,10	2	51,20	**10100**				
1,0	1,0	0,95	5,0	45	17	15	3	5 x DC	0,10	2	51,20	**10200**				
1,0	1,0	0,95	5,0	50	22	15	4	5 x DC	0,10	2	51,20	**10201**				
1,0	1,0	0,95	8,0	50	22	15	3	8 x DC	0,10	2			51,20	**10300**		
1,0	1,0	0,95	8,0	50	22	15	4	8 x DC	0,10	2			51,20	**10301**		
1,0	1,0	0,95	10,0	50	22	15	3	10 x DC	0,10	2			51,20	**10400**		
1,0	1,0	0,95	10,0	55	27	15	4	10 x DC	0,10	2			51,20	**10401**		
1,0	1,0	0,95	12,0	55	27	15	3	12 x DC	0,10	2					51,20	**10500**
1,0	1,0	0,95	12,0	55	27	15	4	12 x DC	0,10	2					51,20	**10501**
1,2	1,2	1,15	3,0	45	17	15	4	2,5 x DC	0,10	2	53,95	**12101**				
1,2	1,2	1,15	6,0	50	22	15	4	5 x DC	0,10	2	53,95	**12201**				
1,2	1,2	1,15	10,0	55	27	15	4	8,3 x DC	0,10	2			53,95	**12301**		
1,2	1,2	1,15	12,0	55	27	15	4	10 x DC	0,10	2			56,70	**12401**		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 40–42

AluLine – Micro-end milling cutter

The specialist for machining non-ferrous metals

▲ T_x = maximum engagement depth



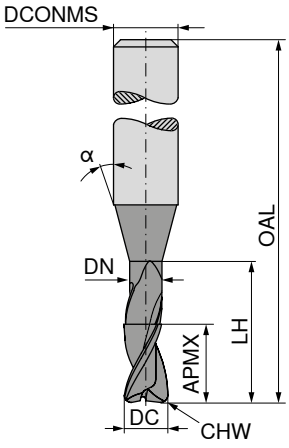

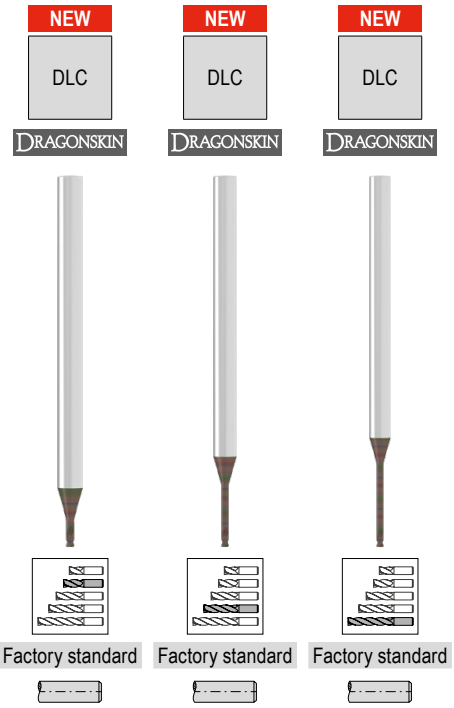

Factory standard | Factory standard | Factory standard

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	LPR mm	α°	DCONMS h5 mm	T_X	CHW mm	ZEFP	53 900 ... EUR V1/5B		53 900 ... EUR V1/5B		53 900 ... EUR V1/5B	
1,3	1,3	1,25	4,0	45	17	15	4	3,1 x DC	0,10	2	62,55	**13101**				
1,3	1,3	1,25	7,0	50	22	15	4	5,4 x DC	0,10	2			64,32	**13201**		
1,3	1,3	1,25	11,0	55	27	15	4	8,5 x DC	0,10	2			69,58	**13301**		
1,3	1,3	1,25	13,0	55	27	15	4	10 x DC	0,10	2			74,05	**13401**		
1,5	1,5	1,44	5,0	50	22	15	4	3,3 x DC	0,10	2	53,95	**15101**				
1,5	1,5	1,44	5,0	45	17	15	3	3,3 x DC	0,10	2	53,95	**15100**				
1,5	1,5	1,44	7,5	50	22	15	3	5 x DC	0,10	2	53,95	**15200**				
1,5	1,5	1,44	7,5	50	22	15	4	5 x DC	0,10	2	53,95	**15201**				
1,5	1,5	1,44	12,0	55	27	15	3	8 x DC	0,10	2			56,70	**15300**		
1,5	1,5	1,44	12,0	55	27	15	4	8 x DC	0,10	2			56,70	**15301**		
1,5	1,5	1,44	15,0	55	27	15	3	10 x DC	0,10	2			56,70	**15400**		
1,5	1,5	1,44	15,0	60	32	15	4	10 x DC	0,10	2			56,70	**15401**		
1,6	1,6	1,52	5,0	50	22	15	4	3,1 x DC	0,10	2	64,32	**16101**				
1,6	1,6	1,52	8,0	50	22	15	4	5 x DC	0,10	2	64,32	**16201**				
1,6	1,6	1,52	13,0	55	27	15	4	8,1 x DC	0,10	2			69,58	**16301**		
1,6	1,6	1,52	16,0	60	32	15	4	10 x DC	0,10	2			74,05	**16401**		
1,8	1,8	1,72	5,5	50	22	15	4	3,1 x DC	0,10	2	53,95	**18101**				
1,8	1,8	1,72	9,0	50	22	15	4	5 x DC	0,10	2	53,95	**18201**				
1,8	1,8	1,72	14,5	55	27	15	4	8,1 x DC	0,10	2			53,95	**18301**		
1,8	1,8	1,72	18,0	60	32	15	4	10 x DC	0,10	2			56,70	**18401**		
2,0	2,0	1,92	6,0	50	22	15	4	3 x DC	0,10	2	53,95	**20101**				
2,0	2,0	1,92	6,0	45	17	15	3	3 x DC	0,10	2	53,95	**20100**				
2,0	2,0	1,92	10,0	50	22	15	4	5 x DC	0,10	2	53,95	**20201**				
2,0	2,0	1,92	10,0	50	22	15	3	5 x DC	0,10	2	53,95	**20200**				
2,0	2,0	1,92	14,0	55	27	15	3	7 x DC	0,10	2			56,70	**20300**		
2,0	2,0	1,92	14,0	55	27	15	4	7 x DC	0,10	2			56,70	**20301**		
2,0	2,0	1,92	16,0	55	27	15	3	8 x DC	0,10	2			56,70	**20400**		
2,0	2,0	1,92	16,0	60	32	15	4	8 x DC	0,10	2			56,70	**20401**		
2,0	2,0	1,92	20,0	60	32	15	3	10 x DC	0,10	2			56,70	**20500**		
2,0	2,0	1,92	20,0	60	32	15	4	10 x DC	0,10	2			56,70	**20501**		
2,3	2,3	2,22	7,0	50	22	15	4	3 x DC	0,10	2	59,46	**23101**				
2,3	2,3	2,22	11,5	55	27	15	4	5 x DC	0,10	2	59,46	**23201**				
2,3	2,3	2,22	18,5	60	32	15	4	8 x DC	0,10	2			66,11	**23301**		
2,3	2,3	2,22	20,0	60	32	15	4	8,7 x DC	0,10	2			59,46	**23401**		
2,3	2,3	2,22	23,0	65	37	15	4	10 x DC	0,10	2			59,46	**23501**		
3,0	3,0	2,90	9,0	50	22	15	4	3 x DC	0,10	2	59,46	**30101**				
3,0	3,0	2,90	15,0	55	27	15	4	5 x DC	0,10	2	59,46	**30201**				
3,0	3,0	2,90	24,0	65	37	15	4	8 x DC	0,10	2			59,46	**30301**		
3,0	3,0	2,90	30,0	70	42	15	4	10 x DC	0,10	2			69,92	**30401**		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 40–42

AluLine – Micro-ball nosed cutter

The specialist for machining non-ferrous metals

▲ Radius accuracy: ± 0,01 mm

▲ T_x = maximum engagement depth



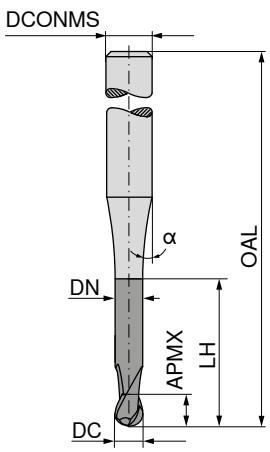

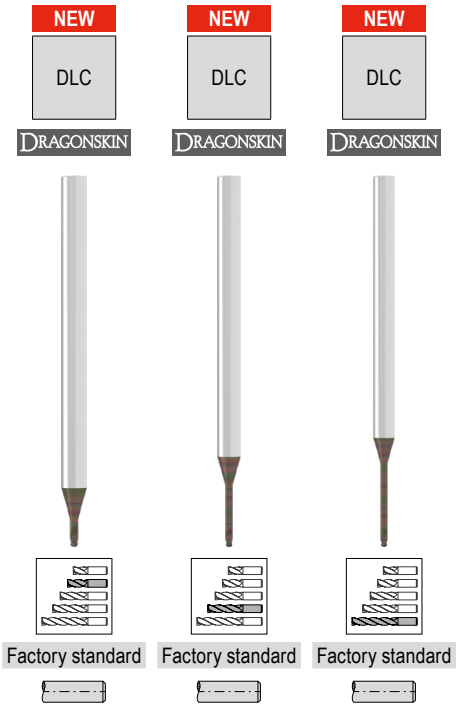

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	LPR mm	α°	DCONMS h5 mm	T_x	ZEFP	53 903 ... EUR V1/5B		53 903 ... EUR V1/5B		53 903 ... EUR V1/5B	
0,2	0,2	0,18	0,6	45	17	15	4	3 x DC	2	77,81	**02101**				
0,2	0,2	0,18	1,0	45	17	15	4	5 x DC	2	77,44	**02201**				
0,2	0,2	0,18	1,6	45	17	15	4	8 x DC	2			77,83	**02301**		
0,2	0,2	0,18	2,0	50	22	15	4	10 x DC	2			77,44	**02401**		
0,3	0,3	0,28	0,9	45	17	15	4	3 x DC	2	75,42	**03101**				
0,3	0,3	0,28	1,5	45	17	15	4	5 x DC	2	77,19	**03201**				
0,3	0,3	0,28	2,4	50	22	15	4	8 x DC	2			75,42	**03301**		
0,3	0,3	0,28	3,0	50	22	15	4	10 x DC	2			75,42	**03401**		
0,4	0,4	0,37	1,2	45	17	15	4	3 x DC	2	69,92	**04101**				
0,4	0,4	0,37	2,0	45	17	15	4	5 x DC	2	69,92	**04201**				
0,4	0,4	0,37	3,2	50	22	15	4	8 x DC	2			69,92	**04301**		
0,4	0,4	0,37	4,0	50	22	15	4	10 x DC	2			69,92	**04401**		
0,5	0,5	0,45	1,5	45	17	15	4	3 x DC	2	56,70	**05101**				
0,5	0,5	0,45	1,5	45	17	15	3	3 x DC	2	56,70	**05100**				
0,5	0,5	0,45	2,5	45	17	15	4	5 x DC	2	56,70	**05201**				
0,5	0,5	0,45	2,5	45	17	15	3	5 x DC	2	56,70	**05200**				
0,5	0,5	0,45	4,0	45	17	15	3	8 x DC	2			56,70	**05300**		
0,5	0,5	0,45	4,0	50	22	15	4	8 x DC	2			56,70	**05301**		
0,5	0,5	0,45	5,0	50	22	15	3	10 x DC	2			56,70	**05400**		
0,5	0,5	0,45	5,0	50	22	15	4	10 x DC	2			56,70	**05401**		
0,6	0,6	0,58	2,0	45	17	15	4	3,3 x DC	2	56,70	**06101**				
0,6	0,6	0,58	3,0	50	22	15	4	5 x DC	2	56,70	**06201**				
0,6	0,6	0,58	5,0	50	22	15	4	8,3 x DC	2			68,24	**06301**		
0,6	0,6	0,58	6,0	50	22	15	4	10 x DC	2			56,70	**06401**		
0,8	0,8	0,77	2,5	45	17	15	4	3,1 x DC	2	56,70	**08101**				
0,8	0,8	0,77	4,0	50	22	15	4	5 x DC	2	56,70	**08201**				
0,8	0,8	0,77	6,5	50	22	15	4	8,1 x DC	2			56,70	**08301**		
0,8	0,8	0,77	8,0	50	22	15	4	10 x DC	2			56,70	**08401**		
1,0	1,0	0,95	3,0	45	17	15	4	3 x DC	2	53,95	**10101**				
1,0	1,0	0,95	3,0	45	17	15	3	3 x DC	2	53,95	**10100**				
1,0	1,0	0,95	5,0	45	17	15	3	5 x DC	2	53,95	**10200**				
1,0	1,0	0,95	5,0	50	22	15	4	5 x DC	2	53,95	**10201**				
1,0	1,0	0,95	8,0	50	22	15	3	8 x DC	2			53,95	**10300**		
1,0	1,0	0,95	8,0	50	22	15	4	8 x DC	2			53,95	**10301**		
1,0	1,0	0,95	10,0	50	22	15	3	10 x DC	2			53,95	**10400**		
1,0	1,0	0,95	10,0	55	27	15	4	10 x DC	2			53,95	**10401**		
1,0	1,0	0,95	12,0	55	27	15	3	12 x DC	2					59,46	**10500**
1,0	1,0	0,95	12,0	55	27	15	4	12 x DC	2					59,46	**10501**
1,2	1,2	1,15	3,0	45	17	15	4	2,5 x DC	2	56,70	**12101**				
1,2	1,2	1,15	6,0	50	22	15	4	5 x DC	2	56,70	**12201**				
1,2	1,2	1,15	10,0	55	27	15	4	8,3 x DC	2			56,70	**12301**		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 40–42

AluLine – Micro-ball nosed cutter

The specialist for machining non-ferrous metals

▲ Radius accuracy: ± 0,01 mm
▲ T_x = maximum engagement depth



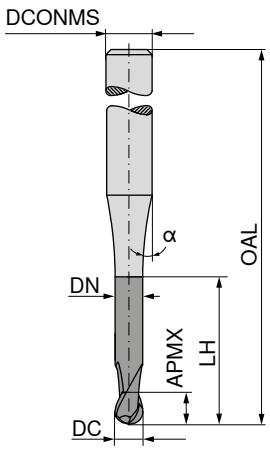

DC -0,01 mm	APMX mm	DN mm	LH mm	OAL mm	LPR mm	α°	DCONMS h5 mm	T_x	ZEFP	53 903 ... EUR V1/5B		53 903 ... EUR V1/5B		53 903 ... EUR V1/5B
1,2	1,2	1,15	12,0	55	27	15	4	10 x DC	2			59,46	**12401**	
1,3	1,3	1,25	4,0	45	17	15	4	3,1 x DC	2	62,55	**13101**			
1,3	1,3	1,25	7,0	50	22	15	4	5,4 x DC	2			62,55	**13201**	
1,3	1,3	1,25	11,0	55	27	15	4	8,5 x DC	2			69,58	**13301**	
1,3	1,3	1,25	13,0	55	27	15	4	10 x DC	2			72,37	**13401**	
1,5	1,5	1,44	5,0	50	22	15	4	3,3 x DC	2	56,70	**15101**			
1,5	1,5	1,44	5,0	45	17	15	3	3,3 x DC	2	56,70	**15100**			
1,5	1,5	1,44	7,5	50	22	15	3	5 x DC	2	56,70	**15200**			
1,5	1,5	1,44	7,5	50	22	15	4	5 x DC	2	56,70	**15201**			
1,5	1,5	1,44	12,0	55	27	15	3	8 x DC	2			59,46	**15400**	
1,5	1,5	1,44	12,0	55	27	15	4	8 x DC	2			59,46	**15401**	
1,5	1,5	1,44	15,0	55	27	15	3	10 x DC	2			59,46	**15300**	
1,5	1,5	1,44	15,0	60	32	15	4	10 x DC	2			59,46	**15301**	
1,6	1,6	1,52	5,0	50	22	15	4	3,1 x DC	2	64,32	**16101**			
1,6	1,6	1,52	8,0	50	22	15	4	5 x DC	2	64,32	**16201**			
1,6	1,6	1,52	13,0	55	27	15	4	8,1 x DC	2			69,58	**16301**	
1,6	1,6	1,52	16,0	60	32	15	4	10 x DC	2			74,05	**16401**	
1,8	1,8	1,72	5,5	50	22	15	4	3,1 x DC	2	62,55	**18101**			
1,8	1,8	1,72	9,0	50	22	15	4	5 x DC	2	56,70	**18201**			
1,8	1,8	1,72	14,5	55	27	15	4	8,1 x DC	2			59,46	**18301**	
1,8	1,8	1,72	18,0	60	32	15	4	10 x DC	2			59,46	**18401**	
2,0	2,0	1,92	6,0	50	22	15	4	3 x DC	2	56,70	**20101**			
2,0	2,0	1,92	6,0	45	17	15	3	3 x DC	2	56,70	**20100**			
2,0	2,0	1,92	10,0	50	22	15	4	5 x DC	2	56,70	**20201**			
2,0	2,0	1,92	10,0	50	22	15	3	5 x DC	2	56,70	**20200**			
2,0	2,0	1,92	14,0	55	27	15	3	7 x DC	2			59,46	**20300**	
2,0	2,0	1,92	14,0	55	27	15	4	7 x DC	2			59,46	**20301**	
2,0	2,0	1,92	16,0	55	27	15	3	8 x DC	2			59,46	**20400**	
2,0	2,0	1,92	16,0	60	32	15	4	8 x DC	2			59,46	**20401**	
2,0	2,0	1,92	20,0	60	32	15	3	10 x DC	2			59,46	**20500**	
2,0	2,0	1,92	20,0	60	32	15	4	10 x DC	2			59,46	**20501**	
2,3	2,3	2,22	7,0	50	22	15	4	3 x DC	2	62,55	**23101**			
2,3	2,3	2,22	11,5	55	27	15	4	5 x DC	2	64,23	**23201**			
2,3	2,3	2,22	18,5	60	32	15	4	8 x DC	2			66,11	**23301**	
2,3	2,3	2,22	20,0	60	32	15	4	8,7 x DC	2			64,23	**23401**	
2,3	2,3	2,22	23,0	65	37	15	4	10 x DC	2			64,23	**23501**	
3,0	3,0	2,90	9,0	50	22	15	4	3 x DC	2	64,23	**30101**			
3,0	3,0	2,90	15,0	55	27	15	4	5 x DC	2	64,23	**30201**			
3,0	3,0	2,90	24,0	65	37	15	4	8 x DC	2			64,23	**30301**	
3,0	3,0	2,90	30,0	70	42	15	4	10 x DC	2			69,92	**30401**	

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 40–42

AluLine – Micro-torus cutter

The specialist for machining non-ferrous metals

▲ T_x = maximum engagement depth



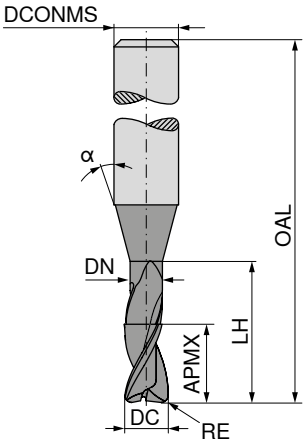

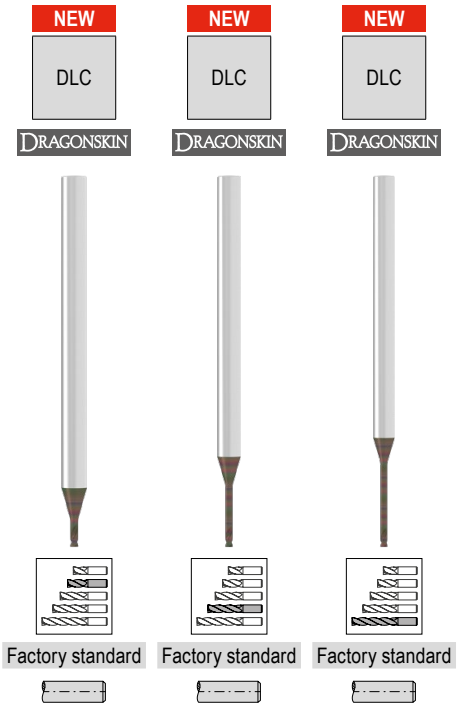

Factory standard | Factory standard | Factory standard

DC -0,01	RE ±0.01	APMX	DN	LH	OAL	LPR	α°	DCONMS h5	T_x	ZEFP	53 901 ... EUR V1/5B		53 901 ... EUR V1/5B		53 901 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm		mm								
0,2	0,02	0,2	0,18	0,6	45	17	15	4	3 x DC	2	77,44	**02101**				
0,2	0,02	0,2	0,18	1,0	45	17	15	4	5 x DC	2	77,44	**02201**				
0,2	0,02	0,2	0,18	1,6	45	17	15	4	8 x DC	2			77,83	**02301**		
0,2	0,02	0,2	0,18	2,0	50	22	15	4	10 x DC	2			77,44	**02401**		
0,3	0,03	0,3	0,28	0,9	45	17	15	4	3 x DC	2	75,42	**03101**				
0,3	0,03	0,3	0,28	1,5	45	17	15	4	5 x DC	2	75,42	**03201**				
0,3	0,03	0,3	0,28	2,4	50	22	15	4	8 x DC	2			77,83	**03301**		
0,3	0,03	0,3	0,28	3,0	50	22	15	4	10 x DC	2			75,42	**03401**		
0,4	0,04	0,4	0,37	1,2	45	17	15	4	3 x DC	2	69,92	**04101**				
0,4	0,04	0,4	0,37	2,0	45	17	15	4	5 x DC	2	69,92	**04201**				
0,4	0,04	0,4	0,37	3,2	50	22	15	4	8 x DC	2			69,92	**04301**		
0,4	0,04	0,4	0,37	4,0	50	22	15	4	10 x DC	2			69,92	**04401**		
0,5	0,05	0,5	0,45	1,5	45	17	15	4	3 x DC	2	56,70	**05101**				
0,5	0,05	0,5	0,45	1,5	45	17	15	3	3 x DC	2	56,70	**05100**				
0,5	0,05	0,5	0,45	2,5	45	17	15	4	5 x DC	2	56,70	**05201**				
0,5	0,05	0,5	0,45	2,5	45	17	15	3	5 x DC	2	56,70	**05200**				
0,5	0,05	0,5	0,45	4,0	45	17	15	3	8 x DC	2			56,70	**05300**		
0,5	0,05	0,5	0,45	4,0	50	22	15	4	8 x DC	2			56,70	**05301**		
0,5	0,05	0,5	0,45	5,0	50	22	15	3	10 x DC	2			56,70	**05400**		
0,5	0,05	0,5	0,45	5,0	50	22	15	4	10 x DC	2			56,70	**05401**		
0,6	0,06	0,6	0,58	2,0	45	17	15	4	3,3 x DC	2	64,32	**06101**				
0,6	0,06	0,6	0,58	3,0	50	22	15	4	5 x DC	2	56,70	**06201**				
0,6	0,06	0,6	0,58	4,2	50	22	15	4	7 x DC	2			56,70	**06301**		
0,6	0,06	0,6	0,58	5,0	50	22	15	4	8,3 x DC	2			74,05	**06401**		
0,6	0,06	0,6	0,58	6,0	50	22	15	4	10 x DC	2			56,70	**06501**		
0,8	0,08	0,8	0,77	2,5	45	17	15	4	3,1 x DC	2	56,70	**08101**				
0,8	0,08	0,8	0,77	4,0	50	22	15	4	5 x DC	2	56,70	**08201**				
0,8	0,08	0,8	0,77	6,5	50	22	15	4	8,1 x DC	2			56,70	**08301**		
0,8	0,08	0,8	0,77	8,0	50	22	15	4	10 x DC	2			56,70	**08401**		
1,0	0,10	1,0	0,95	3,0	45	17	15	4	3 x DC	2	53,95	**10101**				
1,0	0,10	1,0	0,95	3,0	45	17	15	3	3 x DC	2	53,95	**10100**				
1,0	0,10	1,0	0,95	5,0	45	17	15	3	5 x DC	2	53,95	**10200**				
1,0	0,10	1,0	0,95	5,0	50	22	15	4	5 x DC	2	53,95	**10201**				
1,0	0,10	1,0	0,95	8,0	50	22	15	3	8 x DC	2			53,95	**10300**		
1,0	0,10	1,0	0,95	8,0	50	22	15	4	8 x DC	2			53,95	**10301**		
1,0	0,10	1,0	0,95	10,0	50	22	15	3	10 x DC	2			53,95	**10400**		
1,0	0,10	1,0	0,95	10,0	55	27	15	4	10 x DC	2			53,95	**10401**		
1,0	0,10	1,0	0,95	12,0	55	27	15	3	12 x DC	2					59,46	**10500**
1,0	0,10	1,0	0,95	12,0	55	27	15	4	12 x DC	2					59,46	**10501**
1,2	0,12	1,2	1,15	3,0	45	17	15	4	2,5 x DC	2	62,55	**12101**				
1,2	0,12	1,2	1,15	6,0	50	22	15	4	5 x DC	2	56,70	**12201**				
1,2	0,12	1,2	1,15	10,0	55	27	15	4	8,3 x DC	2			56,70	**12301**		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 40–42

AluLine – Micro-torus cutter

The specialist for machining non-ferrous metals

▲ T_x = maximum engagement depth



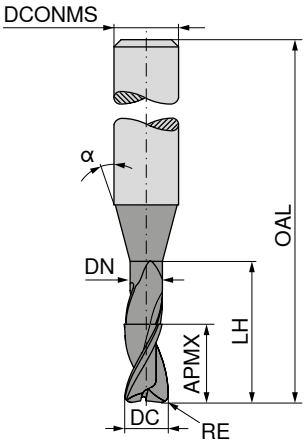

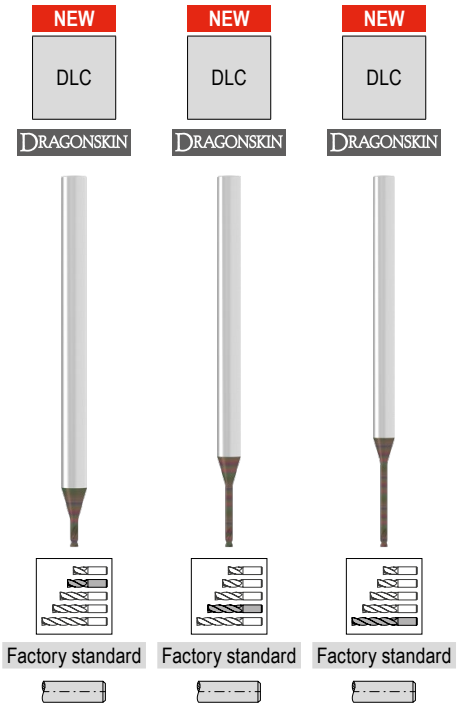

Factory standard | Factory standard | Factory standard

DC -0,01	RE ±0.01	APMX	DN	LH	OAL	LPR	α°	DCONMS h5	T_x	ZEFP	53 901 ... EUR V1/5B		53 901 ... EUR V1/5B		53 901 ... EUR V1/5B	
mm	mm	mm	mm	mm	mm	mm		mm								
1,2	0,12	1,2	1,15	12,0	55	27	15	4	10 x DC	2			59,46	12401		
1,3	0,13	1,3	1,25	4,0	45	17	15	4	3,1 x DC	2	62,55	13101				
1,3	0,13	1,3	1,25	7,0	50	22	15	4	5,4 x DC	2			64,32	13201		
1,3	0,13	1,3	1,25	11,0	55	27	15	4	8,5 x DC	2			69,58	13301		
1,3	0,13	1,3	1,25	13,0	55	27	15	4	10 x DC	2			74,05	13401		
1,5	0,15	1,5	1,44	5,0	50	22	15	4	3,3 x DC	2	56,70	15101				
1,5	0,15	1,5	1,44	5,0	45	17	15	3	3,3 x DC	2	56,70	15100				
1,5	0,15	1,5	1,44	7,5	50	22	15	3	5 x DC	2	56,70	15200				
1,5	0,15	1,5	1,44	7,5	50	22	15	4	5 x DC	2	56,70	15201				
1,5	0,15	1,5	1,44	12,0	55	27	15	3	8 x DC	2			59,46	15300		
1,5	0,15	1,5	1,44	12,0	55	27	15	4	8 x DC	2			59,46	15301		
1,5	0,15	1,5	1,44	15,0	55	27	15	3	10 x DC	2			59,46	15400		
1,5	0,15	1,5	1,44	15,0	60	32	15	4	10 x DC	2			59,46	15401		
1,6	0,16	1,6	1,52	5,0	50	22	15	4	3,1 x DC	2	64,32	16101				
1,6	0,16	1,6	1,52	8,0	50	22	15	4	5 x DC	2	64,32	16201				
1,6	0,16	1,6	1,52	13,0	55	27	15	4	8,1 x DC	2			69,58	16301		
1,6	0,16	1,6	1,52	16,0	60	32	15	4	10 x DC	2			74,05	16401		
1,8	0,18	1,8	1,72	5,5	50	22	15	4	3,1 x DC	2	62,55	18101				
1,8	0,18	1,8	1,72	9,0	50	22	15	4	5 x DC	2	56,70	18201				
1,8	0,18	1,8	1,72	14,5	55	27	15	4	8,1 x DC	2			59,46	18301		
1,8	0,18	1,8	1,72	18,0	60	32	15	4	10 x DC	2			59,46	18401		
2,0	0,20	2,0	1,92	6,0	50	22	15	4	3 x DC	2	56,70	20101				
2,0	0,20	2,0	1,92	6,0	45	17	15	3	3 x DC	2	56,70	20100				
2,0	0,20	2,0	1,92	10,0	50	22	15	4	5 x DC	2	56,70	20201				
2,0	0,20	2,0	1,92	10,0	50	22	15	3	5 x DC	2	56,70	20200				
2,0	0,20	2,0	1,92	14,0	55	27	15	3	7 x DC	2			59,46	20300		
2,0	0,20	2,0	1,92	14,0	55	27	15	4	7 x DC	2			59,46	20301		
2,0	0,20	2,0	1,92	16,0	55	27	15	3	8 x DC	2			59,46	20400		
2,0	0,20	2,0	1,92	16,0	60	32	15	4	8 x DC	2			59,46	20401		
2,0	0,20	2,0	1,92	20,0	60	32	15	3	10 x DC	2			59,46	20500		
2,0	0,20	2,0	1,92	20,0	60	32	15	4	10 x DC	2			59,46	20501		
2,3	0,23	2,3	2,22	7,0	50	22	15	4	3 x DC	2	62,55	23101				
2,3	0,23	2,3	2,22	11,5	55	27	15	4	5 x DC	2	64,32	23201				
2,3	0,23	2,3	2,22	14,0	55	27	15	4	6,1 x DC	2			64,23	23301		
2,3	0,23	2,3	2,22	18,5	60	32	15	4	8 x DC	2			74,05	23401		
2,3	0,23	2,3	2,22	20,0	60	32	15	4	8,7 x DC	2			64,23	23501		
2,3	0,23	2,3	2,22	23,0	65	37	15	4	10 x DC	2			64,23	23601		
3,0	0,30	3,0	2,90	9,0	50	22	15	4	3 x DC	2	64,23	30101				
3,0	0,30	3,0	2,90	15,0	55	27	15	4	5 x DC	2	64,23	30201				
3,0	0,30	3,0	2,90	24,0	65	37	15	4	8 x DC	2			64,23	30301		
3,0	0,30	3,0	2,90	30,0	70	42	15	4	10 x DC	2			69,92	30401		

P			
M			
K			
N	●	●	●
S			
H			
O			

→ v_c/f_z Page 40–42

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – AluLine – micro cutter

Index	$T_x \leq 3xDC$			53 900 ... / 53 901 ... / 53 903 ...									● 1st choice ○ suitable		
				Ø DC (mm) =											
	v_c (mm)	$a_{p\,max.}$ x DC	$a_{e\,max.}$ x DC	0,2	> Ø 0,2 ≤ Ø 0,4	> Ø 0,4 ≤ Ø 0,6	> Ø 0,6 ≤ Ø 0,8	> Ø 0,8 ≤ Ø 1,0	> Ø 1,0 ≤ Ø 1,2	> Ø 1,2 ≤ Ø 1,5	> Ø 1,5 ≤ Ø 2,0	> Ø 2,0 ≤ Ø 3,0	Emulsion	Compressed air	MQL
				f_z (mm)											
N.1.1	400	0,15	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.1.2	400	0,15	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.1	400	0,15	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.2	300	0,15	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.3	200	0,15	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.3.1	140	0,08	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.2	100	0,08	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.3	150	0,08	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.4.1															

Plunging angle for ramping and helical milling: 3°

Index	$T_x > 3xDC$ – 5xDC			53 900 ... / 53 901 ... / 53 903 ...									● 1st choice ○ suitable		
				Ø DC (mm) =											
	v_c (mm)	$a_{p\,max.}$ x DC	$a_{e\,max.}$ x DC	0,2	> Ø 0,2 ≤ Ø 0,4	> Ø 0,4 ≤ Ø 0,6	> Ø 0,6 ≤ Ø 0,8	> Ø 0,8 ≤ Ø 1,0	> Ø 1,0 ≤ Ø 1,2	> Ø 1,2 ≤ Ø 1,5	> Ø 1,5 ≤ Ø 2,0	> Ø 2,0 ≤ Ø 3,0	Emulsion	Compressed air	MQL
				f_z (mm)											
N.1.1	320	0,12	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.1.2	320	0,12	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.1	320	0,12	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.2	240	0,12	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.3	160	0,12	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.3.1	110	0,064	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.2	80	0,064	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.3	120	0,064	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.4.1															

Plunging angle for ramping and helical milling: 2°

Index	$T_x > 5xDC$ – 7xDC			53 900 ... / 53 901 ... / 53 903 ...									● 1st choice ○ suitable		
				Ø DC (mm) =											
	v_c (mm)	$a_{p\,max.}$ x DC	$a_{e\,max.}$ x DC	0,2	> Ø 0,2 ≤ Ø 0,4	> Ø 0,4 ≤ Ø 0,6	> Ø 0,6 ≤ Ø 0,8	> Ø 0,8 ≤ Ø 1,0	> Ø 1,0 ≤ Ø 1,2	> Ø 1,2 ≤ Ø 1,5	> Ø 1,5 ≤ Ø 2,0	> Ø 2,0 ≤ Ø 3,0	Emulsion	Compressed air	MQL
				f_z (mm)											
N.1.1	240	0,105	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.1.2	240	0,105	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.1	240	0,105	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.2	180	0,105	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.3	120	0,105	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.3.1	85	0,056	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.2	60	0,056	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.3	90	0,056	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.4.1															

Plunging angle for ramping and helical milling: 2°

Cutting data standard values – AluLine – micro cutter

Index	T_x > 7xDC – 9xDC			53 900 ... / 53 901 ... / 53 903 ...									● 1st choice ○ suitable		
				Ø DC (mm) =											
	v_c (mm)	$a_{p\,max.}$ x DC	$a_{e\,max.}$ x DC	0,2	> Ø 0,2 ≤ Ø 0,4	> Ø 0,4 ≤ Ø 0,6	> Ø 0,6 ≤ Ø 0,8	> Ø 0,8 ≤ Ø 1,0	> Ø 1,0 ≤ Ø 1,2	> Ø 1,2 ≤ Ø 1,5	> Ø 1,5 ≤ Ø 2,0	> Ø 2,0 ≤ Ø 3,0	Emulsion	Compressed air	MQL
				f_z (mm)											
N.1.1	160	0,09	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.1.2	160	0,09	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.1	160	0,09	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.2	120	0,09	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.3	80	0,09	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.3.1	55	0,048	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.2	40	0,048	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.3	60	0,048	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.4.1															

Plunging angle for ramping and helical milling = 1°

Index	T_x > 9xDC – 12xDC			53 900 ... / 53 901 ... / 53 903 ...									● 1st choice ○ suitable		
				Ø DC (mm) =											
	v_c (mm)	$a_{p\,max.}$ x DC	$a_{e\,max.}$ x DC	0,2	> Ø 0,2 ≤ Ø 0,4	> Ø 0,4 ≤ Ø 0,6	> Ø 0,6 ≤ Ø 0,8	> Ø 0,8 ≤ Ø 1,0	> Ø 1,0 ≤ Ø 1,2	> Ø 1,2 ≤ Ø 1,5	> Ø 1,5 ≤ Ø 2,0	> Ø 2,0 ≤ Ø 3,0	Emulsion	Compressed air	MQL
				f_z (mm)											
N.1.1	120	0,075	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.1.2	120	0,075	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.1	120	0,075	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.2	90	0,075	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.2.3	60	0,075	1,0	0,0085	0,0115	0,0140	0,0170	0,0200	0,0230	0,0280	0,0350	0,0500	●	○	○
N.3.1	40	0,04	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.2	30	0,04	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.3.3	45	0,04	1,0	0,0050	0,0065	0,0080	0,0100	0,0115	0,0130	0,0160	0,0210	0,0300	●	○	○
N.4.1															

Plunging angle for ramping and helical milling = 1°

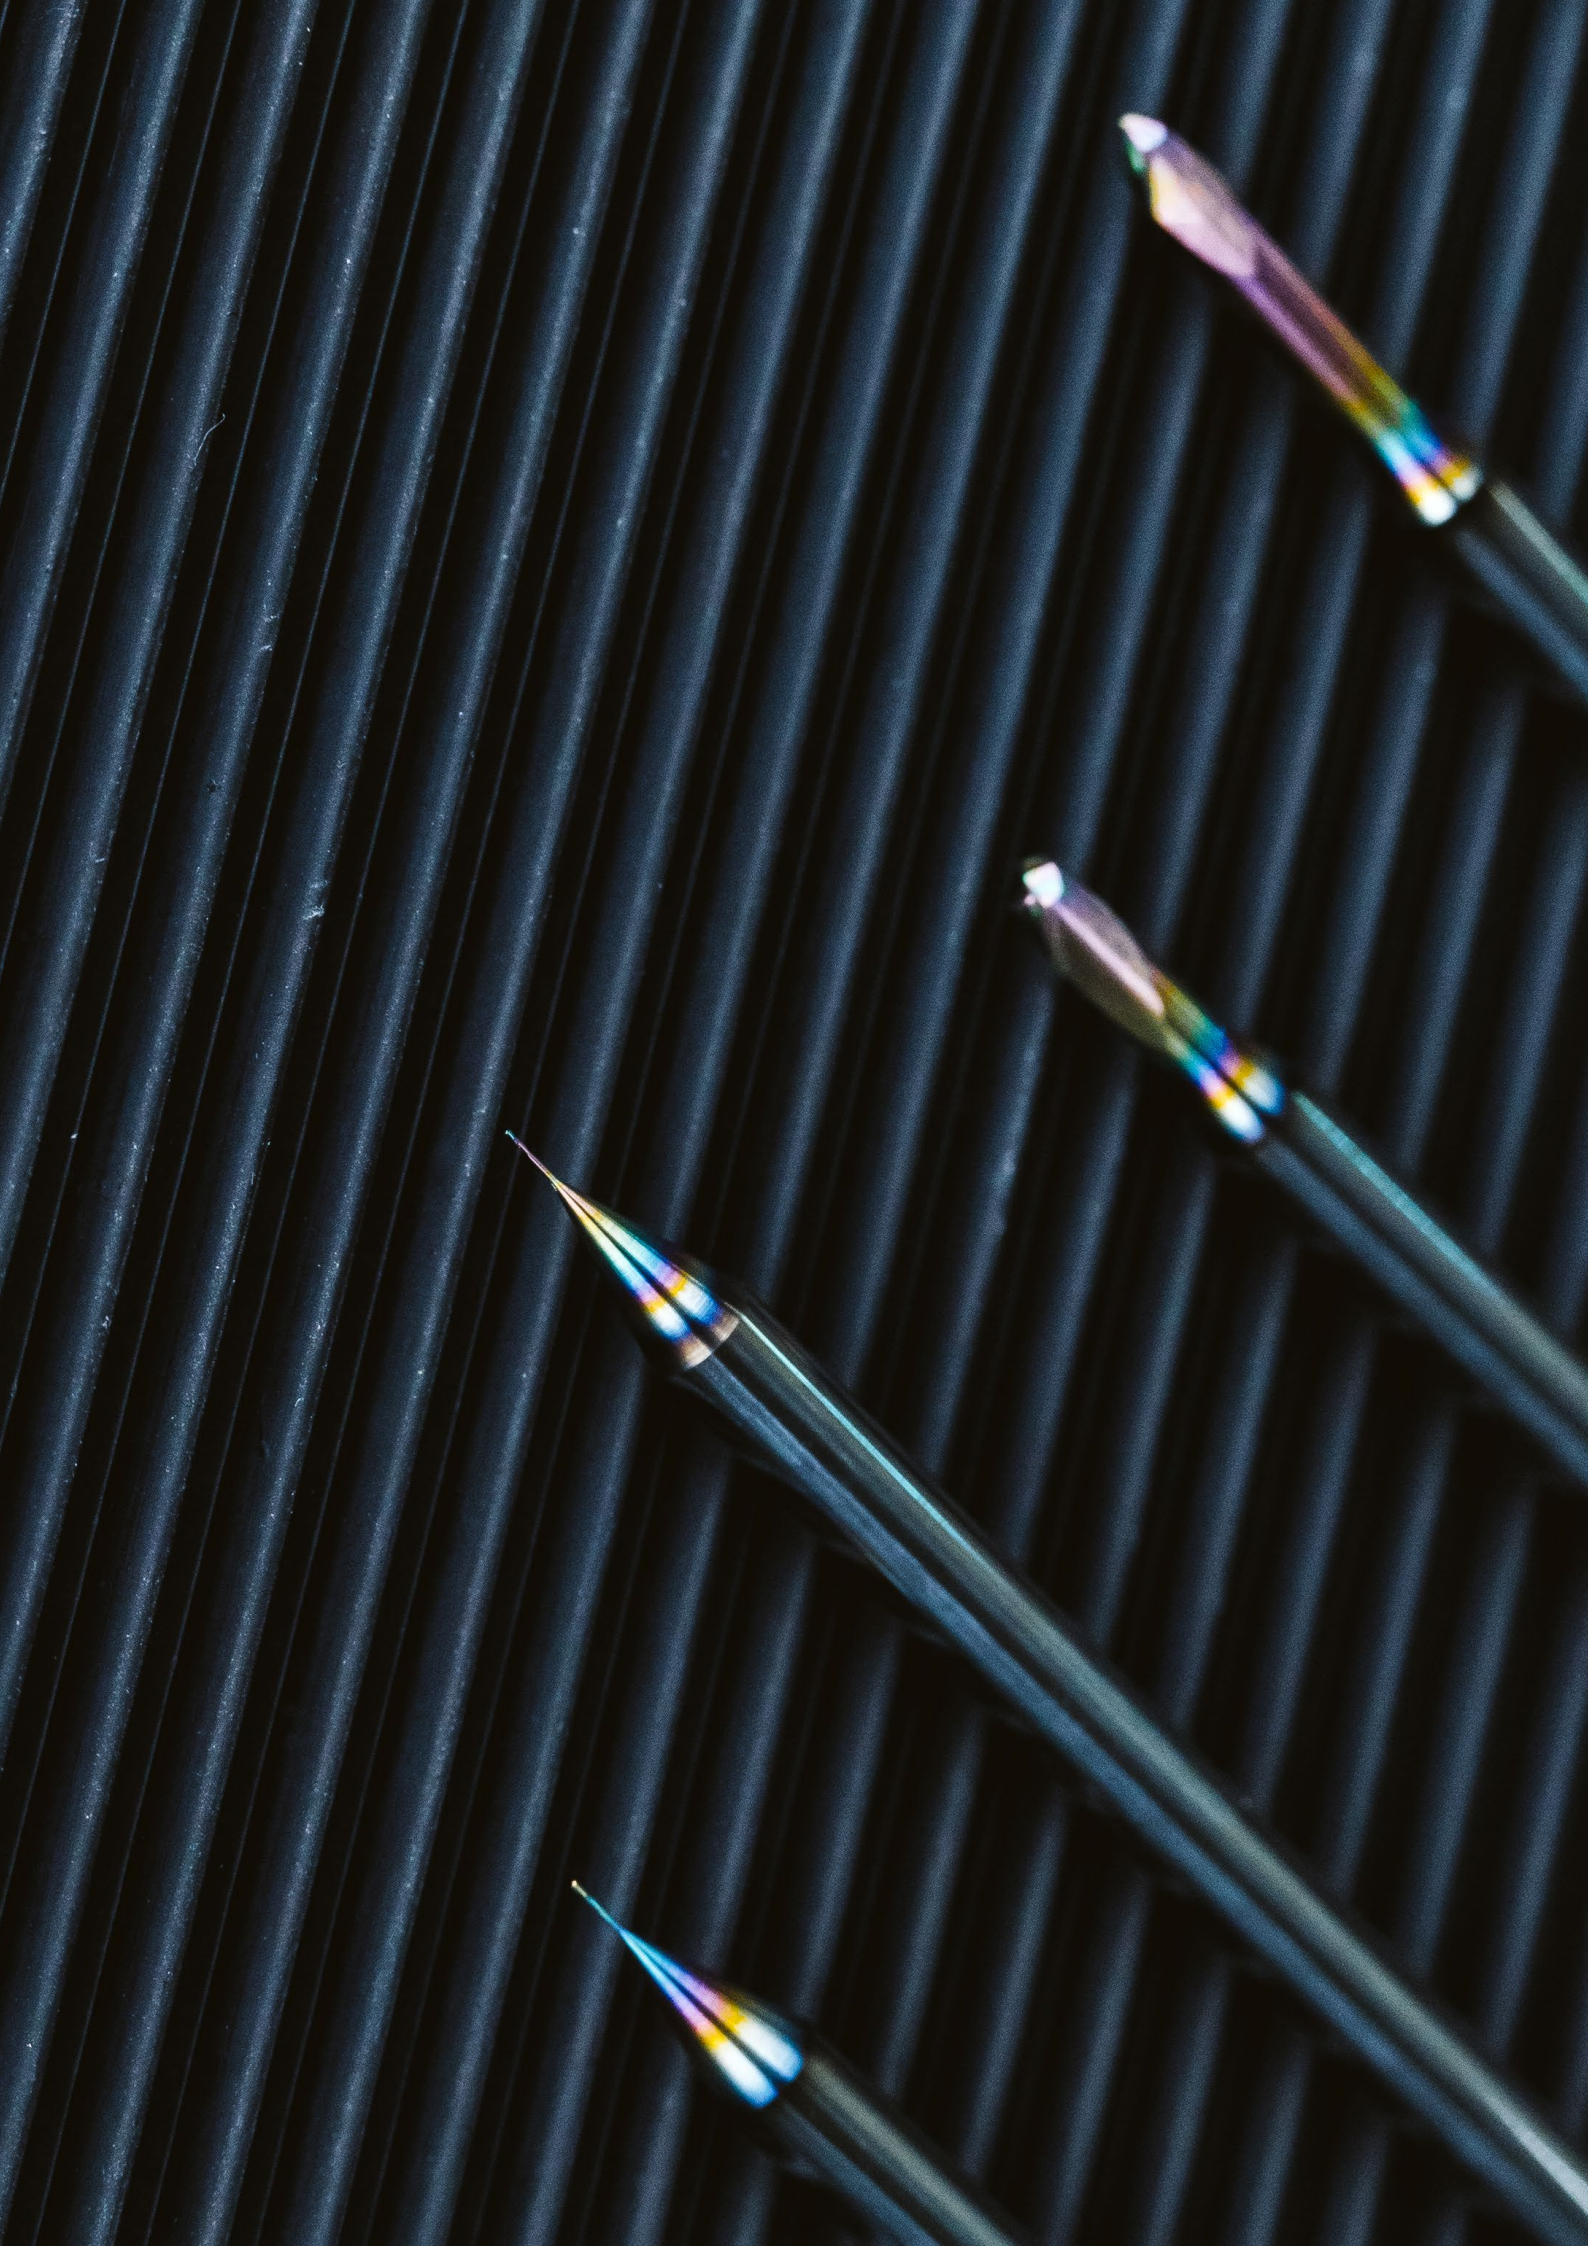

MaxiMill – 211-15-DC Shell mill







NEW

Designation	DC mm	ZNF	APMX mm	OAL mm	DCONMS H6 mm	DHUB mm	RPMX 1/min.	torque moment Nm	Insert	50 798 ... EUR 2B/40	
A211.40.R.04-15-DCA R08	40	4	14	45	16	38	18000	3,2	XDKT 1505..	797,20	**04004**
A211.40.R.04-15-DCA R40	40	4	14	45	16	38	18000	3,2	XDKT 1505..	797,20	**24004**
A211.50.R.05-15-DCA R40	50	5	14	45	22	45	15000	3,2	XDKT 1505..	1.020,00	**25005**
A211.50.R.05-15-DCA R08	50	5	14	45	22	45	15000	3,2	XDKT 1505..	1.020,00	**05005**
A211.63.R.06-15-DCA R40	63	6	14	50	22	48	14000	3,2	XDKT 1505..	1.380,00	**26306**
A211.63.R.06-15-DCA R08	63	6	14	50	22	48	14000	3,2	XDKT 1505..	1.380,00	**06306**
A211.80.R.08-15-DCA R08	80	8	14	55	27	58	12000	3,2	XDKT 1505..	1.823,00	**08008**
A211.80.R.08-15-DCA R40	80	8	14	55	27	58	12000	3,2	XDKT 1505..	1.823,00	**28008**

	TORX® blade	Key D	Molykote	Clamping screw	Torque screwdriver
	80 950 ...	80 950 ...	70 950 ...	70 950 ...	80 950 ...
Spare parts	EUR Y7	EUR Y7	EUR 2A/28	EUR 2A/28	EUR Y7
DC					
40 - 80	6,78 **054**	15,33 **128**	5,64 **303**	4,11 **839**	170,10 **193**

XDKT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDKT 150508..	9,3	4,4	14,8	1,6	5,56
XDKT 150532..	9,3	4,4	14,8	1,9	5,56
XDKT 150540..	9,3	4,4	14,8	1,2	5,56



XDKT

XDKT

NEW

-F40
CTCS245

DRAGONSKIN

F
XDKT

51 165 ...

NEW

-F40
CTC5240

DRAGONSKIN

F
XDKT

51 165 ...

ISO	RE	EUR 1H/17		EUR 1H/17	
	mm				
150508ER	0,8	31,19	50801	31,19	10801
150532ER	3,2	31,19	53201	31,19	13201
150540ER	4,0	31,19	54001	31,19	14001
P					
M					
K					
N					
S			●		●
H					
O					

Cutting data standard values

	Material sub-group	Index	Tensile strength N/mm²* / HB / HRC	CTC5240 DRAGONSKIN		CTCS245 DRAGONSKIN	
				Cutting Material **hard** (v_c↑) → **tough** (v_c↓)			
				v_c (m/min)			
P	Unalloyed steel	P.1.1	420 N/mm² / 125 HB				
		P.1.2	640 N/mm² / 190 HB				
		P.1.3	840 N/mm² / 250 HB				
		P.1.4	910 N/mm² / 270 HB				
		P.1.5	1010 N/mm² / 300 HB				
	Low-alloy steel	P.2.1	610 N/mm² / 180 HB				
		P.2.2	930 N/mm² / 275 HB				
		P.2.3	1010 N/mm² / 300 HB				
		P.2.4	1200 N/mm² / 375 HB				
	High-alloy steel and high-alloy tool steel	P.3.1	680 N/mm² / 200 HB				
		P.3.2	1100 N/mm² / 300 HB				
		P.3.3	1300 N/mm² / 400 HB				
	Stainless steel	P.4.1	680 N/mm² / 200 HB				
		P.4.2	1010 N/mm² / 300 HB				
M	Stainless steel	M.1.1	610 N/mm² / 180 HB				
		M.2.1	300 HB				
		M.3.1	780 N/mm² / 230 HB				
K	Grey cast iron	K.1.1	350 N/mm² / 180 HB				
		K.1.2	500 N/mm² / 260 HB				
	Spherulitic graphite cast iron	K.2.1	540 N/mm² / 160 HB				
		K.2.2	845 N/mm² / 250 HB				
	Malleable iron	K.3.1	440 N/mm² / 130 HB				
		K.3.2	780 N/mm² / 230 HB				
N	Aluminium wrought alloy	N.1.1	60 HB				
		N.1.2	340 N/mm² / 100 HB				
	Cast aluminium alloy	N.2.1	250 N/mm² / 75 HB				
		N.2.2	300 N/mm² / 90 HB				
		N.2.3	440 N/mm² / 130 HB				
	Copper and copper alloys (bronze/brass)	N.3.1	375 N/mm² / 110 HB				
		N.3.2	300 N/mm² / 90 HB				
		N.3.3	340 N/mm² / 100 HB				
	Magnesium alloys	N.4.1	70 HB				
S	Heat-resistant alloys	S.1.1	680 N/mm² / 200 HB		80		64
		S.1.2	950 N/mm² / 280 HB		70		56
		S.2.1	840 N/mm² / 250 HB		35		28
		S.2.2	1180 N/mm² / 350 HB		25		20
		S.2.3	1080 N/mm² / 320 HB		30		24
	Titanium alloys	S.3.1	400 N/mm²		80		64
		S.3.2	1050 N/mm² / 320 HB		50		40
		S.3.3	1400 N/mm² / 410 HB		40		32
H	Hardened steel	H.1.1	46–55 HRC				
		H.1.2	56–60 HRC				
		H.1.3	61–65 HRC				
		H.1.4	66–70 HRC				
	Chilled iron	H.2.1	400 HB				
	Hardened cast iron	H.3.1	55 HRC				
O	Non-metal materials	O.1.1	≤ 150 N/mm²				
		O.1.2	≤ 100 N/mm²				
		O.2.1	≤ 1000 N/mm²				
		O.2.2	≤ 1000 N/mm²				
		O.3.1					

* Tensile strength

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

System MaxiMill 211-15

Machining strategy



1 Helical plunging



2 Axial ramping



3 Angled ramping

DC mm		1 Helical plunging RE = 0,8 mm	2 Axial ramping X_{max}	3 Angled ramping α_R
25	α_R	7,5 °	2,7 mm	9,5 °
	$D_{max.}$	48 mm		
	$D_{min.}$	37 mm		
32	α_R	5 °	2,5 mm	6,8 °
	$D_{max.}$	62 mm		
	$D_{min.}$	47 mm		
40	α_R	3,2 °	2,5 mm	5,1 °
	$D_{max.}$	78 mm		
	$D_{min.}$	63 mm		
50	α_R	2,5 °	2,5 mm	2,5 °
	$D_{max.}$	98 mm		
	$D_{min.}$	86 mm		
63	α_R	1,5 °	2,5 mm	2,5 °
	$D_{max.}$	124 mm		
	$D_{min.}$	111 mm		
80	α_R	1,3 °	2,5 mm	2,0 °
	$D_{max.}$	158 mm		
	$D_{min.}$	147 mm		
100	α_R	1,1 °	2,5 mm	1,5 °
	$D_{max.}$	198 mm		
	$D_{min.}$	190 mm		
125	α_R	0,9 °	2,5 mm	0,9 °
	$D_{max.}$	248 mm		
	$D_{min.}$	240 mm		
160	α_R	0,6 °	2,5 mm	0,7 °
	$D_{max.}$	318 mm		
	$D_{min.}$	310 mm		

Maximum speed related to projection length n_{max} in min^{-1}			
DC mm	l_a = 2 x Ø mm	l_a = 3 x Ø mm	l_a = 5 x Ø mm
25	26560	19520	13320
32	24160	16720	9520
40	22160	14400	7200
50	20320	12320	4880
63	18640	10320	2960
80	17040	8480	
100	15680	6720	
125	14320		
160	13200		

$D_{max.}$ in mm = largest diameter for flat bottom hole

$D_{min.}$ in mm = Smallest diameter for flat bottom surface

a_p in mm = D x π x tan (α_R) = Pitch

l_a in mm = Overhang length

Starting Parameter

XDKT 15

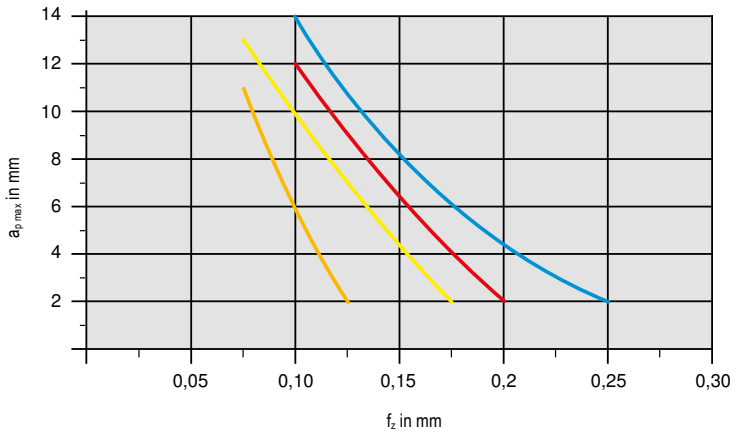

Material			Inserts		v_c in m/min	Cooling
Steel	P.2.2	40CrMnMoS 8-6	XDKT150508SR-M50	CTCP230	200	Dry
Stainless steel	M.1.1	X6CrNiMoTi 1712 2	XDKT150508SR-F50	CTPM240	180	Dry
Cast iron	K.1.1	EN-GJL-250 (GG25)	XDKT150508SR-R50	CTCK215	250	Dry
Heat-resistant	S.2.2	Inconel 718	XDKT150508ER-F40	CTC5240	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 46
From v_c > 400 m/min, the tool must be balanced!

HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

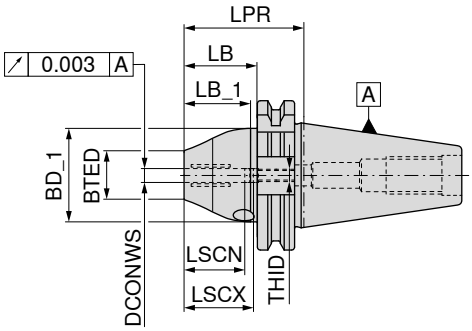

NEW

AD/B
G 2,5 n_{max} 25000

84 254 ...

Adapter	DCONWS	LPR	BTED	BD_1	LB_1	LB	LSCX	LSCN	THID	EUR	
	mm	mm	mm	mm	mm	mm	mm	mm		Y8	
SK 40	25	110	38	57,0	65,3	90,9	57	47	M10X1	407,20	**12579**
SK 40	32	115	38	62,5	65,5	95,9	61	51	M12X1	407,20	**13279**

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
25	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
32	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**

Accessories

→ 282

Reduction sleeve

→ 58, 60

Pull stud

→ 284

Others

Accessories can be found in the clamping technology catalogue → **Chapter 16, Adapters and accessories**

HyPower – Rough

▲ High pressure chuck – especially for milling
▲ Ideal for HSC and HPC applications
▲ High temperature resistance
▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

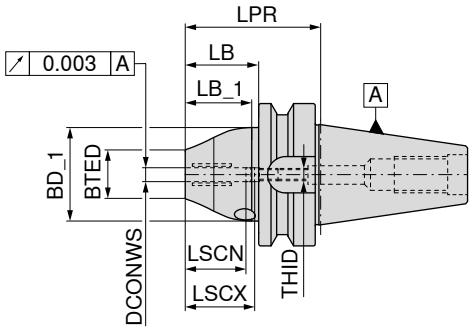



NEW NEW

AD
G 2,5 n_{max} 25000

AD/B
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID		84 254 ... EUR Y8		84 254 ... EUR Y8	
BT 30	6	54	26	46	29,0	34	37	27	M5		358,60	**10670**		
BT 30	8	54	28	46	29,0	34	37	27	M6		358,60	**10870**		
BT 30	10	54	30	50	23,5	34	41	31	M8X1		358,60	**11070**		
BT 30	12	54	32	50	23,5	34	46	36	M10X1		358,60	**11270**		
BT 30	16	69	38	55	38,5	49	49	39	M12X1		358,60	**11670**		
BT 30	20	69	38	58	38,5	49	51	41	M12X1		358,60	**12070**		
BT 40	25	100	38	57	44,6	75	57	47	M16X1				407,20	**12569**
BT 40	32	105	38	62	50,0	80	61	51	M16X1				407,20	**13269**

Clamping key – T

Pressure screw

Stop screw IK

Spare parts DCONWS		80 397 ... EUR Y7			83 950 ... EUR Y8			83 950 ... EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
25	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**
32	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**

Accessories

→ 282
Reduction sleeve

→ 110+111
Pull stud

→ 284
Others

Accessories can be found in the clamping technology catalogue → **Chapter 16, Adapters and accessories**

HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ **Also available** with Balluff chip on request

Scope of supply:
Base body with backstop screw and pressure screw

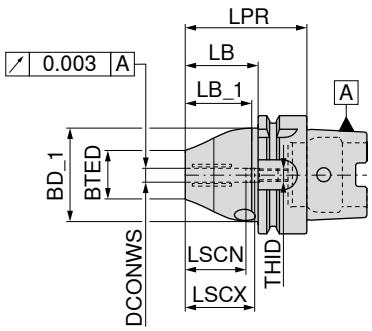

NEW

AD
G 2,5 n_{max} 25000

84 254 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8	
HSK-A 63	25	95	38	57,0	45,0	69	57	47	M10X1	411,50	**12557**
HSK-A 63	32	110	38	62,5	56,6	84	61	51	M10X1	411,50	**13257**
HSK-A 100	25	95	38	70,0	62,2	66	57	47	M10X1	561,60	**12555**
HSK-A 100	32	100	38	75,0	67,2	71	61	51	M10X1	561,60	**13255**

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
25	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
32	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**

Accessories

→ 282

Reduction sleeve

→ 156

Coolant transfer pipe

→ 284

Others

Accessories can be found in the clamping technology catalogue → **Chapter 16, Adapters and accessories**

HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ **Also available** with Balluff chip on request

Scope of supply:

Base body with backstop screw and pressure screw

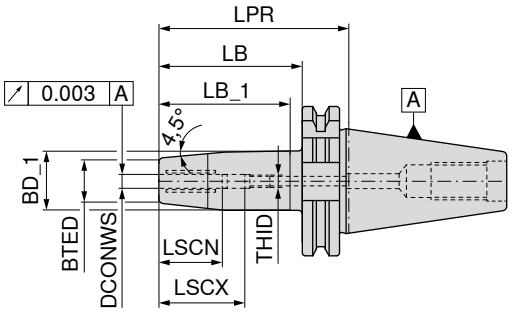

NEW

AD/B

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	84 255 ... EUR Y8	
SK 40	6	120	21	27	48,9	100,9	37	27	M5	630,70	**20679**
SK 40	8	120	21	27	48,9	100,9	37	27	M6	630,70	**20879**
SK 40	10	120	24	32	61,6	100,9	41	31	M8X1	630,70	**21079**
SK 40	12	120	24	32	61,6	100,9	46	36	M10X1	630,70	**21279**
SK 40	16	120		34	56,2	100,9	49	39	M12X1	630,70	**21679**
SK 40	20	120	33	42	68,9	100,9	51	41	M16X1	630,70	**22079**

Clamping key – T

Pressure screw

Stop screw IK

Spare parts DCONWS		80 397 ... EUR Y7			83 950 ... EUR Y8			83 950 ... EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**

Accessories

→ 282

Reduction sleeve

→ 58, 60

Pull stud

→ 284

Others

Accessories can be found in the clamping technology catalogue → **Chapter 16, Adapters and accessories**

HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ **Also available** with Balluff chip on request

Scope of supply:

Base body with backstop screw and pressure screw

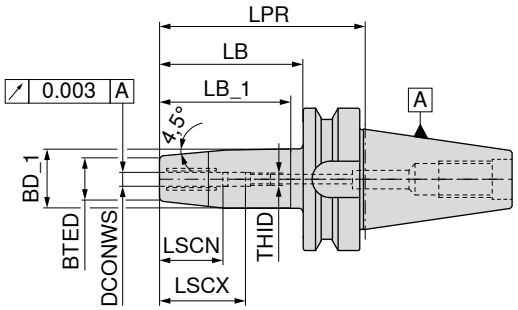

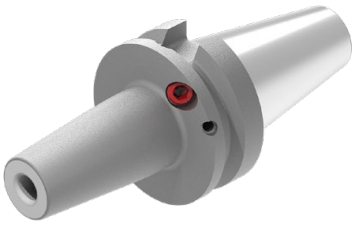

NEW

AD
G 2,5 n_{max} 25000

84 255 ...

NEW

AD/B
G 2,5 n_{max} 25000

84 255 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	EUR Y8		EUR Y8	
BT 30	6	85	21	27	57,7	65	37	27	M5	462,20	**10670**		
BT 30	8	85	21	27	57,7	65	37	27	M6	462,20	**10870**		
BT 30	10	85	24	32	57,7	65	41	31	M8X1	462,20	**11070**		
BT 30	12	85	24	32	57,7	65	46	36	M10X1	462,20	**11270**		
BT 30	16	85	27	34	57,2	65	49	39	M10X1	462,20	**11670**		
BT 30	20	85	33	42	57,5	65	51	41	M10X1	462,20	**12070**		
BT 40	6	120	21	27	48,9	95	37	27	M5			630,70	**20669**
BT 40	8	120	21	27	48,9	95	37	27	M6			630,70	**20869**
BT 40	10	120	24	32	61,6	95	41	31	M8X1			630,70	**21069**
BT 40	12	120	24	32	61,6	95	46	36	M10X1			630,70	**21269**
BT 40	16	120	27	34	56,2	95	49	39	M12X1			630,70	**21669**
BT 40	20	120	33	42	68,9	95	51	41	M16X1			630,70	**22069**

Clamping key – T

80 397 ...

Pressure screw

83 950 ...

Stop screw IK

83 950 ...

Spare parts DCONWS		EUR Y7			EUR Y8			EUR Y7	
6	SW5	5,46	**050**	M10x12	7,56	**55000**			
6	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
8	SW5	5,46	**050**	M10x12	7,56	**55000**			
8	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
10	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
10	SW5	5,46	**050**	M10x12	7,56	**55000**			
12	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
12	SW5	5,46	**050**	M10x12	7,56	**55000**			
16	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
16	SW5	5,46	**050**	M10x12	7,56	**55000**			
20	SW5	5,46	**050**	M10x12	7,56	**55000**			
20	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**

Accessories

→ 282

Reduction sleeve

→ 110+111

Pull stud

→ 284

Others

Accessories can be found in the clamping technology catalogue → **Chapter 16, Adapters and accessories**

HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ **Also available** with Balluff chip on request

Scope of supply:

Base body with backstop screw and pressure screw

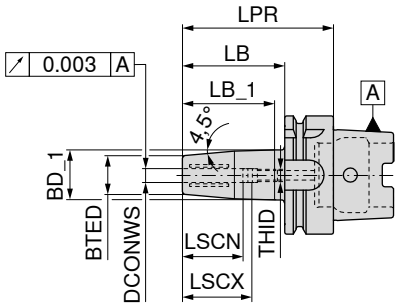

NEW

AD

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	84 255 ... EUR Y8	
HSK-A 63	6	120	21	27	48,9	94	37	27	M5	651,20	**20657**
HSK-A 63	8	120	21	27	48,9	94	37	27	M6	651,20	**20857**
HSK-A 63	10	120	24	32	61,6	94	41	31	M8X1	651,20	**21057**
HSK-A 63	12	120	24	32	61,6	94	46	36	M10X1	651,20	**21257**
HSK-A 63	16	120	27	34	56,2	94	49	39	M12X1	651,20	**21657**
HSK-A 63	20	120	33	42	68,9	94	51	41	M16X1	651,20	**22057**
HSK-A 100	6	120	21	27	48,9	91	37	27	M5	840,30	**20655**
HSK-A 100	8	120	21	27	48,9	91	37	27	M6	840,30	**20855**
HSK-A 100	10	120	24	32	61,6	91	41	31	M8X1	840,30	**21055**
HSK-A 100	12	120	24	32	61,6	91	46	36	M10X1	840,30	**21255**
HSK-A 100	16	120	27	34	56,2	91	49	39	M12X1	840,30	**21655**
HSK-A 100	20	120	33	42	68,9	91	51	41	M16X1	840,30	**22055**

Clamping key – T

Pressure screw

Stop screw IK

Spare parts for Article no.		80 397 ... EUR Y7			83 950 ... EUR Y8			83 950 ... EUR Y7	
84 255 20657	SW5	5,46	**050**	M10x10	6,14	**55100**	M5x12,5 - SW2,5	10,45	**418**
84 255 20857	SW5	5,46	**050**	M10x10	6,14	**55100**	M6x12,5 - SW3	10,45	**419**
84 255 21057	SW5	5,46	**050**	M10x10	6,14	**55100**	M8x1x13,5 - SW3	10,45	**420**
84 255 21257	SW5	5,46	**050**	M10x10	6,14	**55100**	M10x1x13,5 - SW5	10,45	**421**
84 255 21657	SW5	5,46	**050**	M10x10	6,14	**55100**	M12x1x13,5 - SW5	10,45	**422**
84 255 22057	SW5	5,46	**050**	M10x10	6,14	**55100**	M16x1x13,5 - SW8	12,04	**424**
84 255 20655	SW5	5,46	**050**	M10x12	7,56	**55000**	M5x12,5 - SW2,5	10,45	**418**
84 255 20855	SW5	5,46	**050**	M10x12	7,56	**55000**	M6x12,5 - SW3	10,45	**419**
84 255 21055	SW5	5,46	**050**	M10x12	7,56	**55000**	M8x1x13,5 - SW3	10,45	**420**
84 255 21255	SW5	5,46	**050**	M10x12	7,56	**55000**	M10x1x13,5 - SW5	10,45	**421**
84 255 21655	SW5	5,46	**050**	M10x12	7,56	**55000**	M12x1x13,5 - SW5	10,45	**422**
84 255 22055	SW5	5,46	**050**	M10x12	7,56	**55000**	M16x1x13,5 - SW8	12,04	**424**

Accessories

→ 282

Reduction sleeve

→ 156

Coolant transfer pipe

→ 284

Others

Accessories can be found in the clamping technology catalogue → **Chapter 16, Adapters and accessories**

Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

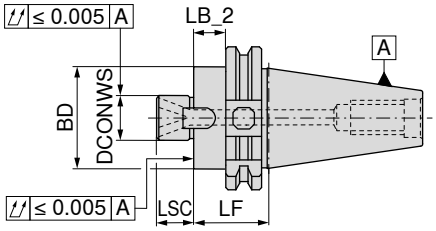

NEW

AD
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	82 315 ... EUR Y8/3B	
medium length	SK 40	22	81	100	38	19	119,00	**22279**
	SK 40	27	81	100	48	21	131,80	**22779**
	SK 50	22	81	100	38	19	162,80	**22278**
	SK 50	27	81	100	48	21	178,40	**22778**
long	SK 40	22	111	130	38	19	125,10	**32279**
	SK 40	27	111	130	48	21	135,90	**32779**
	SK 50	22	111	130	38	19	171,70	**32278**
	SK 50	27	111	130	48	21	187,10	**32778**

These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters.
Now they can be clamped perfectly, thanks to the adapted flange diameters.

		Screw for drivers		Driver		clamping screw	
		83 950 ...		83 950 ...		83 950 ...	
Spare parts DCONWS		EUR Y8/3B		EUR Y8/3B		EUR Y8/3B	
22	M4x8	0,75	**51700**	10x7x20,5	10,58 **51500**	M10x25	4,28 **124**
27	M5x8	0,92	**51800**	12x9x24,3	12,06 **51600**	M12x30	4,73 **125**

Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

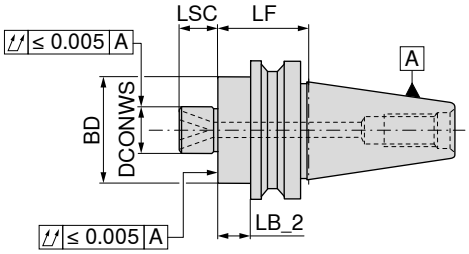

NEW

AD
G 2,5 n_{max} 25000

	Adapter	DCONWS mm	BD mm	LB_2 mm	LF mm	LSC mm		82 315 ... EUR Y8/3B	
medium length	BT 40	22	38	73	100	19		112,60	**22269**
	BT 40	27	48	73	100	21		123,30	**22769**
	BT 50	22	38	62	100	19		158,10	**22268**
	BT 50	27	48	62	100	21		172,30	**22768**
long	BT 40	22	38	103	130	19		121,60	**32269**
	BT 40	27	48	103	130	21		129,50	**32769**
	BT 50	22	38	92	130	19		170,30	**32268**
	BT 50	27	48	92	130	21		181,10	**32768**

These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters.
Now they can be clamped perfectly, thanks to the adapted flange diameters.

Screw for drivers

Driver

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B	
22	M4x8	0,75	**51700**	10x7x20,5	10,58	**51500**	M10x25	4,28	**124**
27	M5x8	0,92	**51800**	12x9x24,3	12,06	**51600**	M12x30	4,73	**125**

Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs
▲ also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

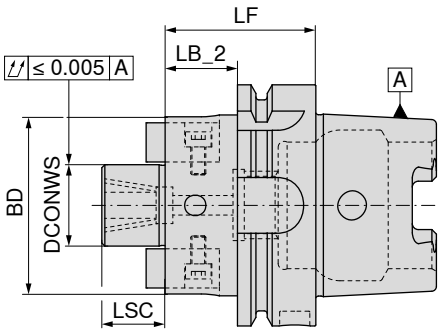



NEW

G 2,5 n_{max} 25000

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	82 315 ... EUR Y8/3B	
medium length	HSK-A 63	22	74	100	38	19	253,30	**22257**
	HSK-A 63	27	74	100	48	21	253,30	**22757**
	HSK-A 100	22	71	100	38	19	255,90	**22255**
	HSK-A 100	27	71	100	48	21	265,70	**22755**
long	HSK-A 63	22	104	130	38	19	259,70	**32257**
	HSK-A 63	27	104	130	48	21	259,70	**32757**
	HSK-A 100	22	101	130	38	19	262,70	**32255**
	HSK-A 100	27	101	130	48	21	283,70	**32755**

These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters.
Now they can be clamped perfectly, thanks to the adapted flange diameters.

		Screw for drivers			Driver			clamping screw	
		83 950 ...			83 950 ...			83 950 ...	
Spare parts DCONWS		EUR Y8/3B			EUR Y8/3B			EUR Y8/3B	
22	M4x8	0,75	**51700**	10x7x20,5	10,58	**51500**	M10x25	4,28	**124**
27	M5x8	0,92	**51800**	12x9x24,3	12,06	**51600**	M12x30	4,73	**125**

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

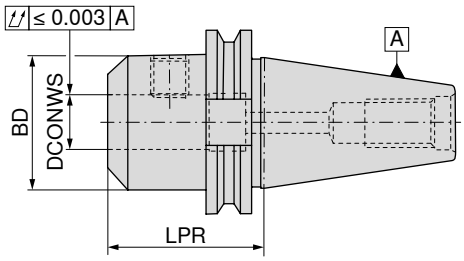

NEW

AD/Be
G 2,5 n_{max} 25000

82 404 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8/3B	
short	SK 40	6	50	25	76,97	**106**
	SK 40	8	50	28	77,35	**108**
	SK 40	10	50	35	77,71	**110**
	SK 40	12	50	42	78,06	**112**
	SK 40	14	50	44	78,42	**114**
	SK 40	16	63	48	81,76	**116**
	SK 40	18	63	50	82,68	**118**
	SK 40	20	63	52	83,04	**120**
	SK 40	25	100	65	87,68	**125** [1]
	SK 40	32	100	72	104,80	**13200** [1]
	SK 50	6	63	25	118,60	**30600**
	SK 50	8	63	28	121,90	**30800**
	SK 50	10	63	35	122,60	**31000**
	SK 50	12	63	42	123,40	**31200**
	SK 50	14	63	44	124,90	**31400**
	SK 50	16	63	48	126,40	**31600**
	SK 50	18	63	50	126,50	**31800**
	SK 50	20	63	52	126,70	**32000**
	SK 50	25	80	65	133,80	**32500** [1]
	SK 50	32	100	72	141,00	**33200** [1]
	SK 50	40	120	90	146,20	**34000**
medium length	SK 40	40	120	80	122,70	**54000** [1]

1) Version with two grubscrews

Accessories

→ 58, 60

Pull stud

→ 284

Others

Accessories can be found in the clamping technology catalogue
→ **Chapter 16, Adapters and accessories**

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

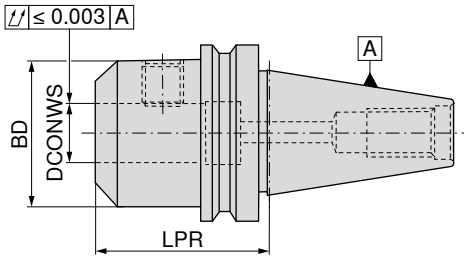

NEW

AD/Be
G 2,5 n_{max} 25000

82 504 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	EUR Y8/3B	
short	BT 40	6	50	25	79,44	**106**
	BT 40	8	50	28	79,98	**108**
	BT 40	10	63	35	81,92	**110**
	BT 40	12	63	42	82,09	**112**
	BT 40	14	63	44	82,23	**114**
	BT 40	16	63	48	85,12	**116**
	BT 40	18	63	50	85,27	**118**
	BT 40	20	63	52	85,81	**120**
	BT 40	25	100	65	91,74	**125** [1)]
	BT 40	32	100	72	106,50	**13200** [1)]
	BT 40	40	120	90	117,90	**14000**
	BT 50	6	63	25	124,00	**30600**
	BT 50	8	63	28	125,60	**30800**
	BT 50	10	80	35	129,70	**31000**
	BT 50	12	80	42	130,40	**31200**
	BT 50	14	80	44	129,50	**31400**
	BT 50	16	80	48	133,50	**31600**
	BT 50	18	80	50	132,50	**31800**
	BT 50	20	80	52	133,80	**32000**
	BT 50	25	100	65	143,10	**32500** [1)]
	BT 50	32	105	72	145,80	**33200** [1)]
	BT 50	40	120	90	149,30	**34000**

1) Version with two grubscrews

Accessories

→ 58, 60

Pull stud

→ 284

Others

Accessories can be found in the clamping technology catalogue
→ **Chapter 16, Adapters and accessories**

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

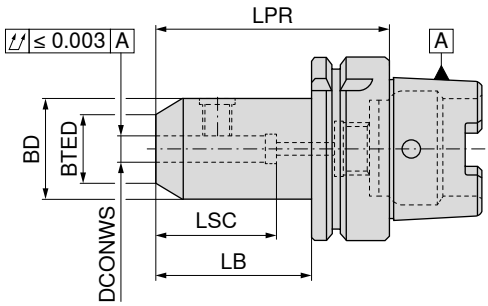

NEW

G 2,5 n_{max} 25000

82 404 ...

	Adapter	DCONWS $_{H4}$ mm	LPR mm	BD mm	BTED mm	LB mm	LSC mm	EUR Y8/3B	
short	HSK-A 63	6	65	25	15	39	34	140,60	**10657**
	HSK-A 63	8	65	28	20	39	34	140,60	**10857**
	HSK-A 63	10	65	35	25	39	39	140,60	**11057**
	HSK-A 63	12	80	42	30	54	44	140,60	**11257**
	HSK-A 63	14	80	44	32	54	44	140,60	**11457**
	HSK-A 63	16	80	48	36	54	47	140,60	**11657**
	HSK-A 63	18	80	50	38	54	47	140,60	**11857**
	HSK-A 63	20	80	52	40	54	49	140,60	**12057**
	HSK-A 63	25	110	65	45	84	54	140,60	**12557**
	HSK-A 63	32	110	72	52	84	58	140,60	**13257**
	HSK-A 63	40	125	80	60	99	71	140,60	**14057**
	HSK-A 100	6	80	25	15	51	34	188,50	**10655**
	HSK-A 100	8	80	28	20	51	34	188,50	**10855**
	HSK-A 100	10	80	35	25	51	39	188,50	**11055**
	HSK-A 100	12	80	42	30	51	44	188,50	**11255**
	HSK-A 100	14	80	44	32	51	44	188,50	**11455**
	HSK-A 100	16	100	48	36	71	47	188,50	**11655**
	HSK-A 100	18	100	50	38	71	47	188,50	**11855**
	HSK-A 100	20	100	52	40	71	49	188,50	**12055**
	HSK-A 100	25	100	65	45	71	54	188,50	**12555**
	HSK-A 100	32	100	72	52	71	58	188,50	**13255**
	HSK-A 100	40	110	80	60	81	68	188,50	**14055**

Grubscrew

62 950 ...

Spare parts DCONWS	EUR W7	
6	0,84	**006**
8	0,99	**008**
10	1,31	**010**
12	1,32	**012**
14	1,32	**012**
16	1,66	**016**
18	1,66	**016**
20	2,01	**020**
25	3,66	**025**
32	4,04	**032**
40	4,04	**032**

Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
▲ also available with Balluff chip **on request**

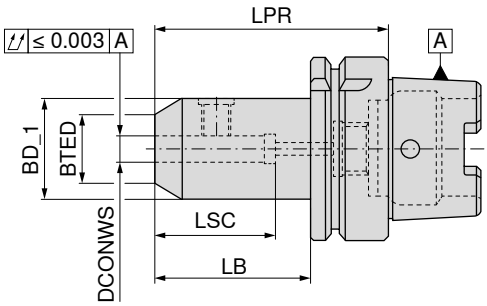

NEW NEW

	Adapter	DCONWS $_{H5}$ mm	LPR mm	BTED mm	BD_1 mm	LB mm	LSC mm	G 2,5 n_{max} 25000 **82 740 ...** EUR Y8/3B		G 2,5 n_{max} 25000 **82 741 ...** EUR Y8/3B	
short	HSK-A 63	40	120	60	80	94	68	140,60	**14057**		
	HSK-A 63	40	120	60	80	94	68			133,10	**14057**

The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

Accessories

→ 156

Coolant transfer pipe

→ 284

Others

Accessories can be found in the clamping technology catalogue
→ **Chapter 16, Adapters and accessories**

HAAS/Doosan – BMT 65 – Axial square section tool holder

▲ directly screwed version

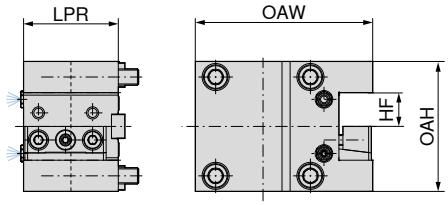



NEW

Left-hand

82 483 ...

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm	EUR Y7	
BMT 65	70 x 73	25	75	97	131	547,10	**00008**

HAAS/Doosan – BMT 65 – Combi tool holder

▲ directly screwed version
▲ double-sided version

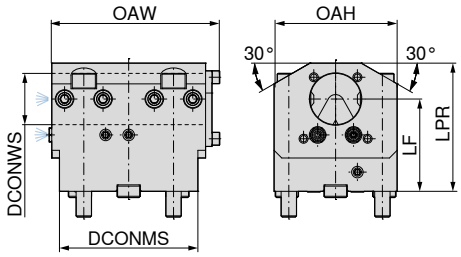



NEW

IC

82 483 ...

Adapter	Hole pattern	DCONWS mm	LF mm	OAH mm	LPR mm	OAW mm	DCONMS mm	EUR Y7	
BMT 65	70 x 73	40	72	96	106	132	103	448,30	**03009**

CentriClamp – ZSG mini – 6-sided clamping tower

Scope of supply:

6-sided clamping tower incl. ZSG mini L-80 mm without system jaws

ZSG mini

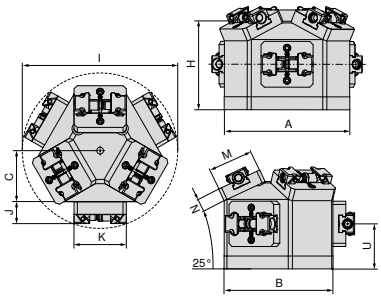

NEW

80 912 ...

A	B	C	H	I	J	K	M	N	U	WT	EUR	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	Y4	
193,24	169,40	78	135,7	236	33,7	80	70,4	20	70	13,5	4.650,00	**55000**

Underside dimensions of ZSG mini – 6-sided clamping tower



B	$D_{\pm 0.015}$	$E_{\pm 0.015}$	Ø F	G_{H7}	$J_{1\,H7}$	Ø J_2
mm	mm	mm	mm	mm	mm	mm
169,40	100	66	95	12	25	13

MNG mini – 4-sided clamping tower

- ▲ Incl. 4 x MNG mini zero point clamping systems
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

MNG mini

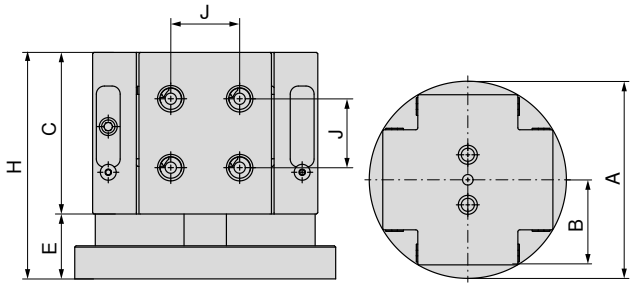

NEW

A mm	B mm	C mm	E mm	H mm	J ±0.015 mm	WT kg	80 915 ... EUR Y4	
197	85	122	49	171	52	12	1.960,00	**54000**

Suitable for: ESG 5 – 80 L-130 / ZSG 4 – 80 L-130 / ZSG mini – 70 L-80 / ZSG mini – 70 L-100

Underside dimensions of MNG mini – 4-sided clamping tower

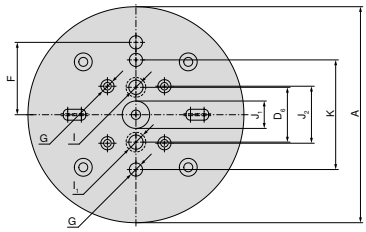

A mm	D_6 mm	F ±0.015 mm	G H7 mm	I H7 mm	I_1 H7 mm	J_1 H7 mm	J_2 ±0.015 mm	K ±0.015 mm
197	50	66	12	13	19	25	52	100

System accessories overview

Protection plugs

- ▲ Protective cover to shield changeover interface
- ▲ Price per piece

MNG mini

NEW

D_1 mm	80 915 ... EUR Y4	
16	13,30	**51900**

System jaws overview

Insert jaws, round, grip 3 mm

▲ Price per piece
▲ For adapter jaws**80 914 34000**





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
			18	3			42	34		44,00	**80 914 34500**										●	

Indexable jaw, fixed VS, grip 3 mm

▲ Price per piece
▲ VS = Larger clamping range





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	65	40	35	3	32	2,6	64	28	17	392,00	**80 914 34400**										●	
90	90		35	3	32	2,6	64	28	17	392,00	**80 914 34300**										●	

Support, hard for milling over

▲ Price per piece



For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		5,4				15			50,00	**80 914 51200**										●	
90	90		5,4				15			56,00	**80 914 51100**										●	

Sustainability is not a goal, it's a mission.

We have an ambitious sustainability mission that will affect and change the entire supply chain. But we can only achieve true sustainability together. That's why our mission goes beyond our own scope:

We want to enable our customers to produce more sustainably with our products and services. With our ambitious mission, we want to make an important contribution to tackling the climate crisis.

Mission #1:
Climate neutral by 2025

Mission #2:
Minimise the use of virgin raw materials

connACT
Together for Sustainability

cutting.tools/ie/en/sustainability

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

Our current valid terms and conditions apply which can be found on our website. Images and prices are valid, subject to corrections due to technical improvements or further developments as well as general mistakes and typographical errors.

ENGINEERS FIRST AND FOREMOST.

JUST OUR THING

TECHNICAL SUPPORT.
WHEN YOU NEED IT MOST.

OUR WAREHOUSE IN YOUR MACHINE SHOP.

www.just-our-thing.com

THE Cutting Tool Solution

CERATIZIT GROUP

09/2024 – 99 122 00264

UP2DATE

Stable roughing with turbo feeds!

Maximum process security including for difficult-to-access components.

... OUR LATEST HIGHLIGHTS

- The **MaxiMill – Tangent** rough milling system compatible with actively vibration-damped shell mill adapters
- The **WTX – Micropilot** drill for extremely demanding machining operations on the smallest components with maximum precision
- Robust side and face milling cutter, the **MaxiMill – Slot-SNHX** for extra-soft cuts

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

Welcome!

It couldn’t be easier

Ordering via the Online Shop

https://cuttingtools.ceratizit.com

On-site technical support

Your Local Technical Sales Engineer

Your customer number

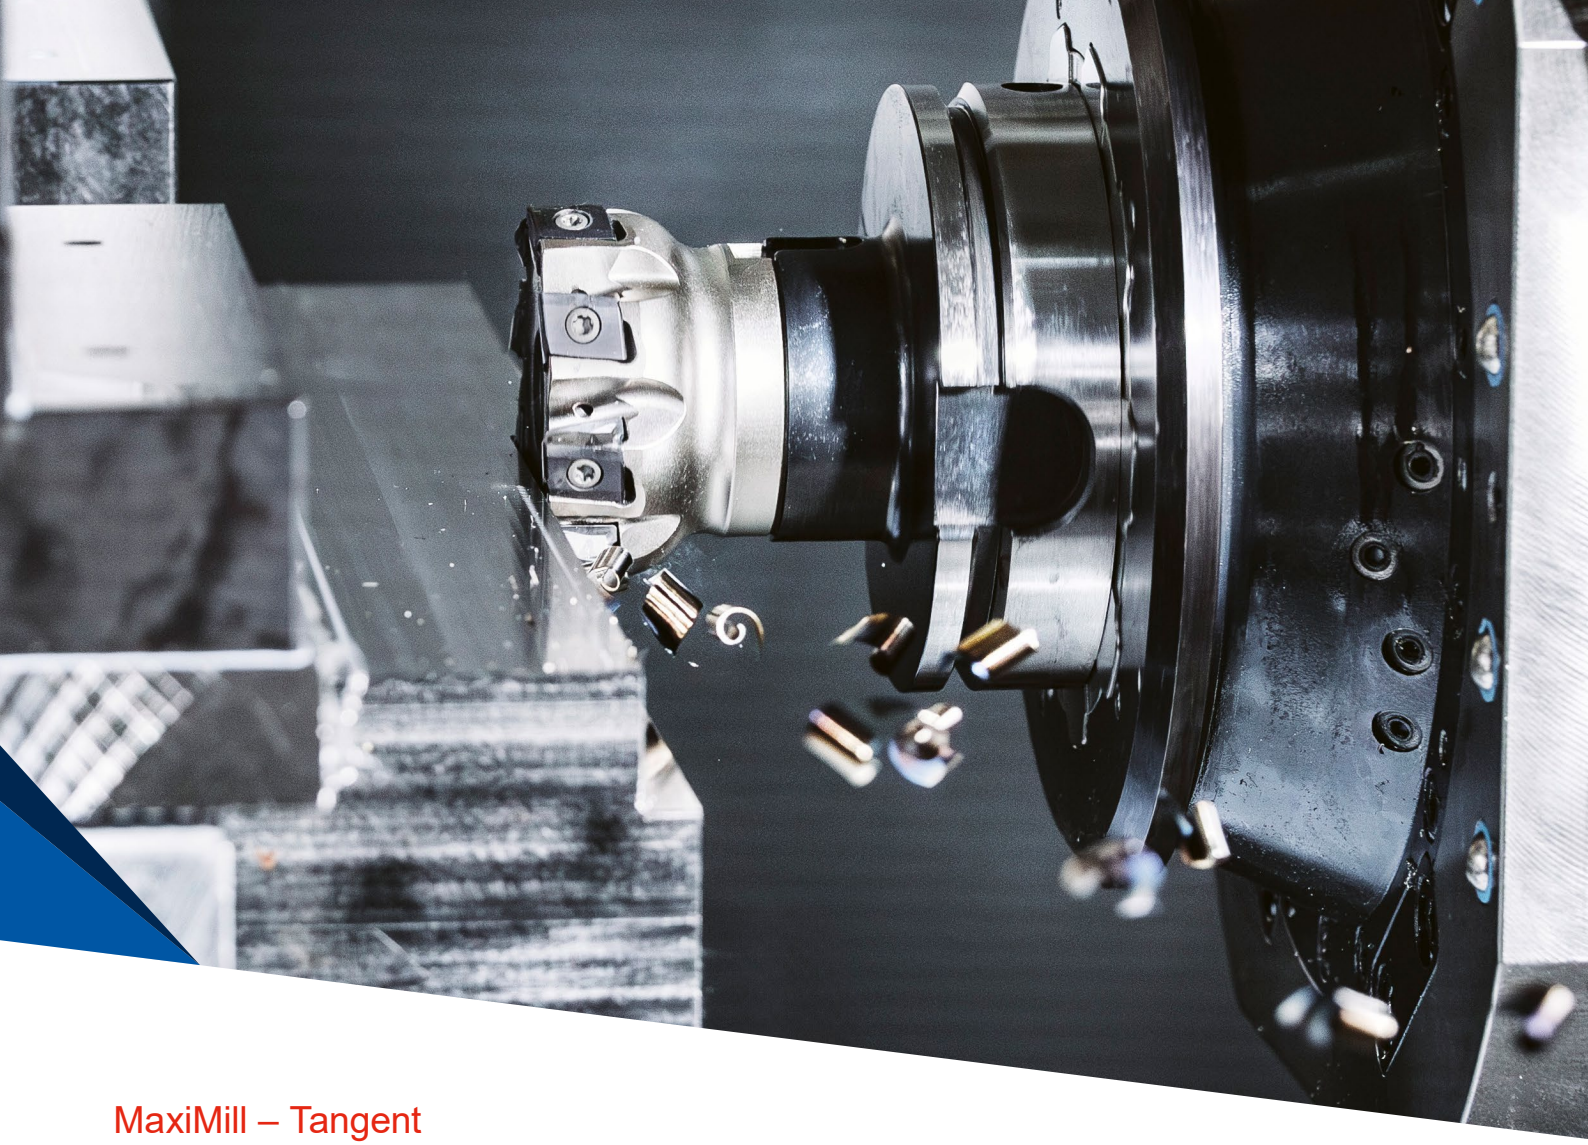

MaxiMill – Tangent

Stable roughing of steel and cast iron

CERATIZIT

Tangential indexable insert milling cutter with maximum tooth utilisation

The MaxiMill – Tangent guarantees the best cutting edge stability for turbo feeds

Do you know that? Do you have to process a component and can't see the process because of all the disruptive contours? Face milling cutters are completely out of the running, especially when long overhang lengths make stable, low-vibration machining impossible.

What might at first glance appear an insoluble dilemma, just needs the right tool – like the new **MaxiMill – Tangent**. This tangential indexable insert cutter shows its true colours when machining steel and cast iron components.

→ **from page 37**
You can find further information on the product here.

cts.ceratizit.com/ie/en/maximill-tangent

The advantages of the MaxiMill – Tangent at a glance

- ▲ stable, soft-cutting system
- ▲ rugged design permits up to 50% greater feed rate per tooth
- ▲ wide variety of tool holders with different connections:
  G (thread) / A (shell mill adapter) / C (cylindrical shank)
- ▲ maximum number of teeth on the milling body thanks to tangential clamping
- ▲ the best axial and concentric run-out properties due to precision-ground inserts
  and tight manufacturing tolerances for the tool holder
- ▲ reduced vibration thanks to irregular tooth pitch
- ▲ better accessibility allows for rapid tool change

... also compatible with actively vibration-damped adapter

→ for maximum process security including
for difficult-to-access components

Ground indexable insert with extra-stable cutting edges

- ▲ Indexable inserts for diverse applications **P** / **K** / S / M
- ▲ 4 usable cutting edges
- ▲ Chip breakers: -F50 and -M50
- ▲ Precision-ground indexable inserts (size -09 and -13)
- ▲ Max. depth of cut:
  - with insert size -09 > 8 mm
  - with insert size -13 > 12 mm

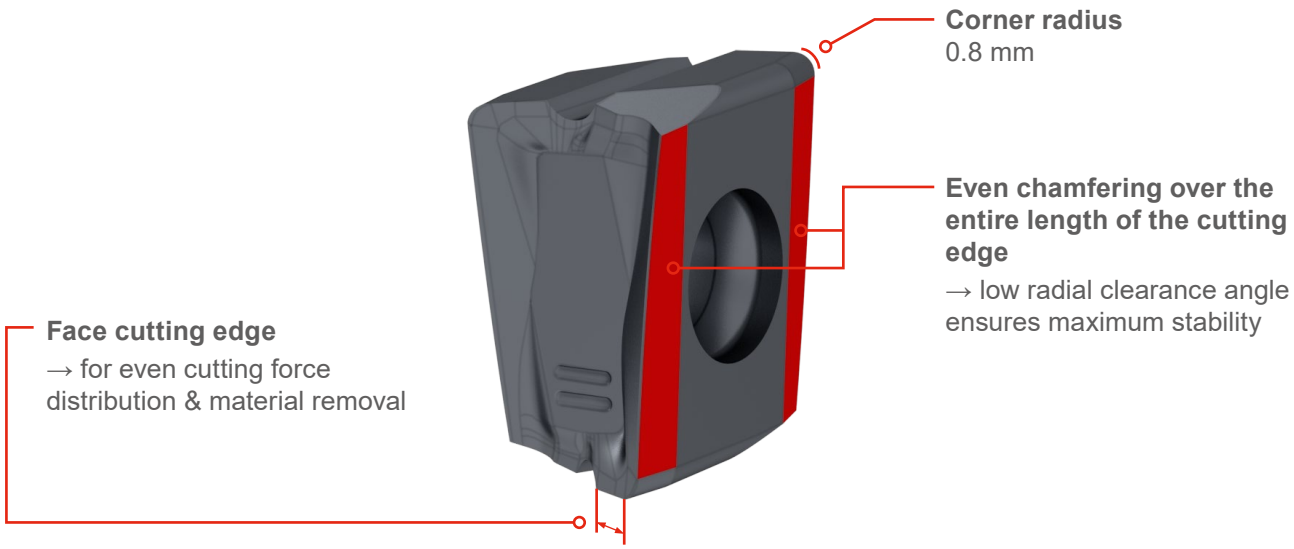

Maximum cutting edge stability

▼

High feed rates possible

Increased tool life

▼

Increase in performance & productivity

„Thanks to the super-stable design, the powerful, four-edged indexable inserts and tangential clamping by the **MaxiMill – Tangent**, we are now able to machine components with interference contours easily and economically – using the integrated feed turbo.“

Robert Frei, Product Manager Indexable Insert Milling Systems

WTX – Micropilot

Fewer tool changes, time and cost savings – with maximum precision

Our latest development, the WTX – Micropilot, makes the impossible possible. Whereas in the past, spot drilling on angled or curved surfaces would only have been possible with prior spot-facing for each milling cutter, now you only need one tool: the WTX – Micropilot. What if you want to produce a 90° countersink at the hole entrance, say? The WTX – Micropilot lets you do it in a single machining operation. So there is no need to change the tool, saving you time and money.

Perfectly adapted for use with our microdrill, the WTX – Micro (8xD – 30xD), the pilot drill is used up to a hole depth of 2.5xD. Its sophisticated end geometry with 160° point angle allows for clean plunging and avoids wandering by the main drill. The special Dragonskin coating ensures optimum chip evacuation and a longer tool life.

WNT

→ **from page 12**
You can find further information on the product here.

cts.ceratizit.com/ie/en/wtx-micro

The advantages of the WTX – Micropilot:

- State-of-the-art: substrate, geometry, coating
- WTX – Micropilot (pilot drill) and WTX – Micro (deep hole drill) are perfectly attuned to one another
- Extremely tight tolerances ensure the deep hole drill does not wander
- Optimum chip evacuation thanks to sophisticated end geometry and DPX74M Dragonskin coating
- 90° countersink at the hole entrance possible (with flat drilling application)

Maximum productivity and process security thanks to optimised geometry and high-performance coating

- Direct spot drilling of straight, angled and curved surfaces with an angle of inclination of up to 50°

Significant saving in time and money as there is no need for an additional tool – 2 instead of 3 process steps

Direct spot drilling of convex and concave surfaces possible

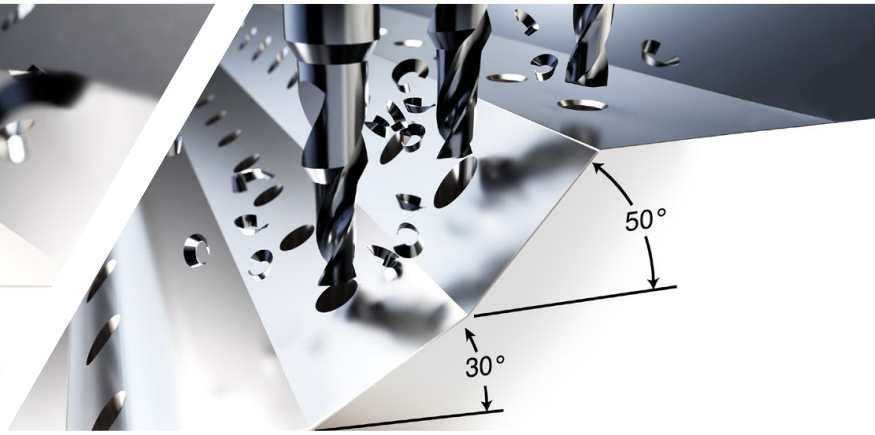

Direct spot drilling of angled surfaces up to 50° or 90° countersink with flat drilling application

MaxiMill – Slot-SNHX

Robust side and face milling cutter system for soft cuts

CERATIZIT

MaxiMill – Slot-SNHX: Slot milling like a knife through butter

Fabricators who need to produce slots in steel, stainless steel, cast material or aluminium frequently have to battle with unstable machining processes. The solution to this long-standing problem can be found in soft-cutting side and face milling cutters that are suitable for universal application to meet varied challenges while saving on costs per cut. The **MaxiMill – Slot SNHX system** steps up to the mark here, thanks to its wide-ranging portfolio of tool holders and indexable inserts, effectively covering cutting widths from 6 mm to 16 mm and diameters from 50 mm to 200 mm.

→ **from page 43**
You can find further information on the product here.

cts.ceratizit.com/ie/en/maximill-slot-snhx

Advantage/benefit

Cutter body

- ▲ Wide variety of tool holders with different connections: G (thread), A (shell mill adapter) and C (cylindrical shank)
- ▲ Cutting widths from 6 mm to 16 mm and diameters from 50 mm to 200 mm
- ▲ Excellent performance and process security via demand-driven thro' coolant
- ▲ Reduced risk of chip jams due to cut distribution
- ▲ No disruptive contours on the face due to tight manufacturing tolerances for the tool holder
- ▲ System easily adapts to special sizes and special tools

Indexable insert

- ▲ Reliable indexable inserts with wide range of applications **P** / **M** / **K** / N
- ▲ The best axial and concentric run-out properties due to precision-ground inserts
- ▲ Flat flute base and good clearance thanks to ground indexable inserts and adapted insert installation position in the tool holder
- ▲ Key feature of inserts and supports → ease of installation

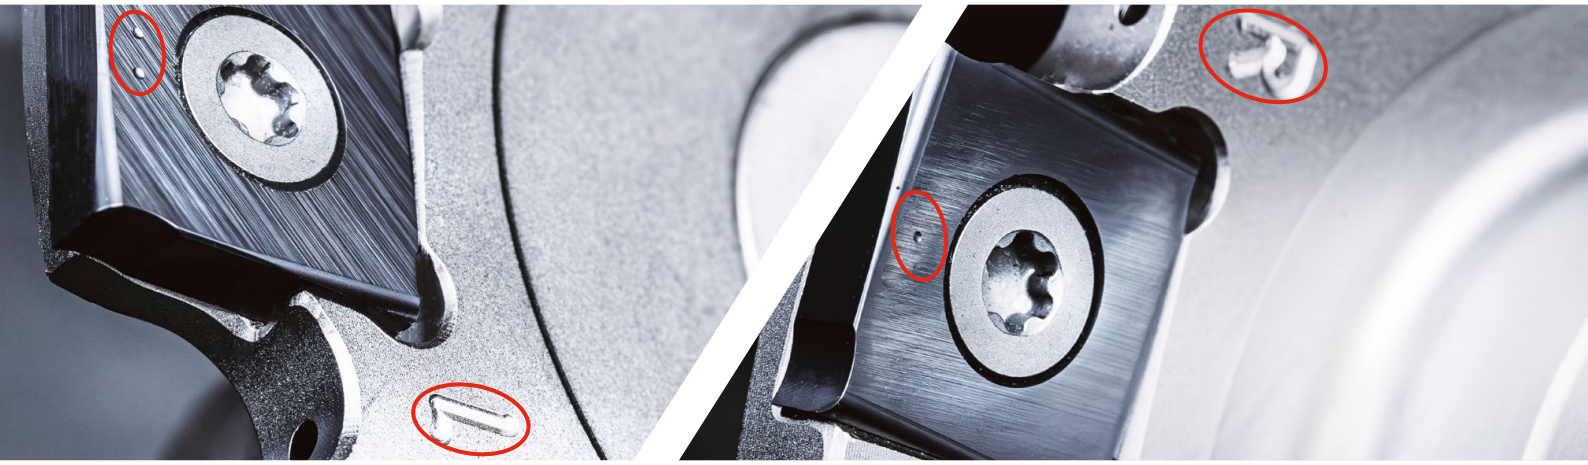

L ●● left-hand insert

R ● right-hand insert

The new MaxiMill – Slot SNHX in tool life test

Application:	Reverse-side machining
Material:	SG-Iron 500 / EN-GJS 500
Tool:	MaxiMill – Slot-SNHX
a_p:	3 mm
a_e:	42 mm
Tool life:	600 pieces

- ▲ Better handling thanks to large indexable insert clamping screw
- ▲ Softer cut than competitors due to ground cutting edge
- ▲ Less time and effort for setting up due to improved service life and fewer indexable inserts

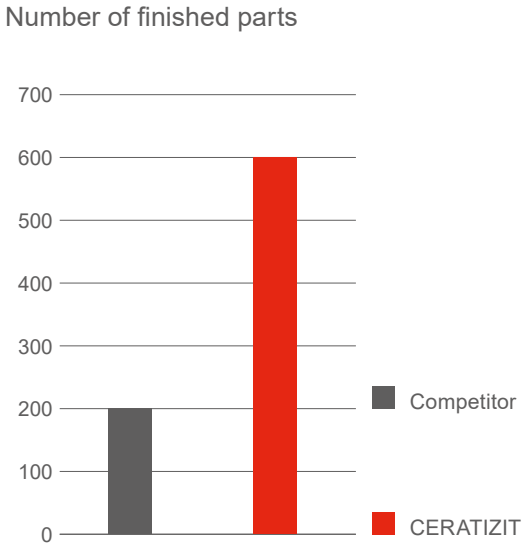

TEST RESULTS

Superior performance, tool life and ease of handling!

Pilot drill

WTX – Micropilot

Table of contents

WNT	Solid carbide drilling	
12–15	**WTX – Micropilot**	
WNT	Circular and Thread Milling	
16–18	MonoThread – ZSGF	
19	Product enhancement, MonoThread – SGF UNJF and UNJC	
CERATIZIT	Turning Tools	
22–29	MaxiLock-D tool holder with DirectCooling	
WNT	Solid Carbide milling cutters	
30–33	Milling cutter enhancement, HPC – UNI type ML	

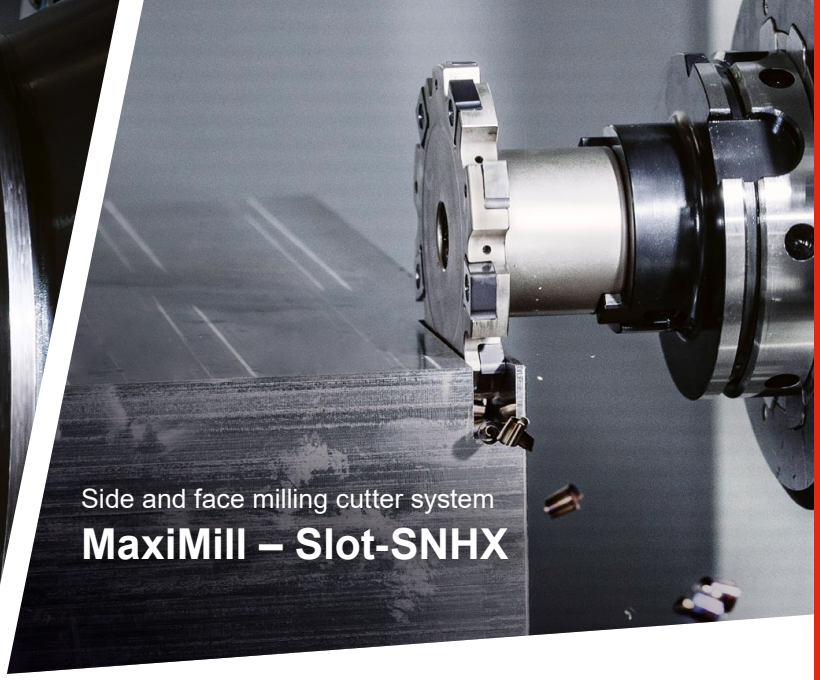

CERATIZIT Milling tools with indexable inserts

34–36 MaxiMill – HFCD

37–42 **MaxiMill – Tangent**

43–47 **MaxiMill – Slot-SNHX**

WNT Adapters and accessories

54–56 **Actively vibration-damped shell mill adapter**

WNT Workpiece clamping

58–60 MNG base plates

61–65 Addition, MNG Mini

Continue to the product pages

WTX – Pilot drill 90°

- ▲ Specialised pilot drill for WTX – Micro deep hole drill (8xD–30xD)
- ▲ Direct spot drilling of angled and curved surfaces up to 50° angle of inclination possible
- ▲ 90° countersink at hole entrance can be achieved on flat spot drilling surface



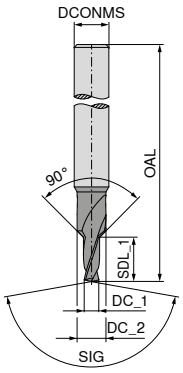

NEW

MICRO PILOT

DPX74M

DRAGONSKIN

SIG 160°

Solid carbide

DC_1 m6 mm	DC_2 mm	DCONMS h6 mm	OAL mm	SDL_1 mm	10 692 ... EUR T4/9F	
0,8	1,7	4	55	2,00	44,41	**00800**
0,9	1,7	4	55	2,25	44,41	**00900**
1,0	2,0	4	55	2,50	44,41	**01000**
1,1	2,0	4	55	2,75	44,41	**01100**
1,2	2,0	4	55	3,00	44,41	**01200**
1,3	2,5	4	55	3,25	44,41	**01300**
1,4	2,5	4	55	3,50	44,41	**01400**
1,5	3,0	4	55	3,75	44,41	**01500**
1,6	3,0	4	55	4,00	44,41	**01600**
1,7	3,0	4	55	4,25	44,41	**01700**
1,8	3,5	4	55	4,50	44,41	**01800**
1,9	3,5	4	55	4,75	44,41	**01900**
2,0	3,5	6	65	5,00	52,70	**02000**
2,1	3,5	6	65	5,25	52,70	**02100**
2,2	4,5	6	65	5,50	52,70	**02200**
2,3	4,5	6	65	5,75	52,70	**02300**
2,4	4,5	6	65	6,00	52,70	**02400**
2,5	4,5	6	65	6,25	52,70	**02500**
2,6	4,5	6	65	6,50	52,70	**02600**
2,7	5,0	6	65	6,75	52,70	**02700**
2,8	5,0	6	65	7,00	52,70	**02800**
2,9	5,0	6	65	7,25	52,70	**02900**

P	●
M	○
K	●
N	
S	●
H	
O	

→ v_c Page 13
→ Machining information: Page 14+15

Cutting data standard values – WTX – Micropilot

	Material sub-group	Index	Tensile strength N/mm²* / HB / HRC	10 692 ... without through coolant v_c (m/min)	2,5xD ≤ Ø 1 f (mm/rev)	> Ø 1–1,25	> Ø 1,25–1,5	> Ø 1,5–2	> Ø 2–2,5	> Ø 2,5–3
P	Unalloyed steel	P.1.1	420 N/mm² / 125 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
		P.1.2	640 N/mm² / 190 HB	**60**	0,010	0,013	0,015	0,019	0,022	0,025
		P.1.3	840 N/mm² / 250 HB	**60**	0,010	0,013	0,015	0,019	0,022	0,025
		P.1.4	910 N/mm² / 270 HB	**60**	0,010	0,013	0,015	0,019	0,022	0,025
		P.1.5	1010 N/mm² / 300 HB	60	0,010	0,013	0,015	0,019	0,022	0,025
	Low-alloy steel	P.2.1	610 N/mm² / 180 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
		P.2.2	930 N/mm² / 275 HB	**60**	0,010	0,013	0,015	0,019	0,022	0,025
		P.2.3	1010 N/mm² / 300 HB	60	0,010	0,013	0,015	0,019	0,022	0,025
		P.2.4	1200 N/mm² / 375 HB							
	High-alloy steel and high-alloy tool steel	P.3.1	680 N/mm² / 200 HB	**60**	0,010	0,013	0,015	0,019	0,022	0,025
		P.3.2	1100 N/mm² / 300 HB	50	0,010	0,013	0,015	0,019	0,022	0,025
		P.3.3	1300 N/mm² / 400 HB							
	Stainless steel	P.4.1	680 N/mm² / 200 HB	**50**	0,005	0,006	0,007	0,010	0,013	0,015
		P.4.2	1010 N/mm² / 300 HB	**35**	0,005	0,006	0,007	0,010	0,013	0,015
M	Stainless steel	M.1.1	610 N/mm² / 180 HB	40	0,005	0,006	0,007	0,010	0,013	0,015
		M.2.1	300 HB	40	0,005	0,006	0,007	0,010	0,013	0,015
		M.3.1	780 N/mm² / 230 HB	40	0,005	0,006	0,007	0,010	0,013	0,015
K	Grey cast iron	K.1.1	350 N/mm² / 180 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
		K.1.2	500 N/mm² / 260 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
	Spherulitic graphite cast iron	K.2.1	540 N/mm² / 160 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
		K.2.2	845 N/mm² / 250 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
	Malleable iron	K.3.1	440 N/mm² / 130 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
		K.3.2	780 N/mm² / 230 HB	**70**	0,010	0,013	0,015	0,019	0,022	0,025
N	Aluminium wrought alloy	N.1.1	60 HB							
		N.1.2	340 N/mm² / 100 HB							
	Cast aluminium alloy	N.2.1	250 N/mm² / 75 HB							
		N.2.2	300 N/mm² / 90 HB							
		N.2.3	440 N/mm² / 130 HB							
	Copper and copper alloys (bronze/brass)	N.3.1	375 N/mm² / 110 HB							
		N.3.2	300 N/mm² / 90 HB							
		N.3.3	340 N/mm² / 100 HB							
	Magnesium alloys	N.4.1	70 HB							
S	Heat-resistant alloys	S.1.1	680 N/mm² / 200 HB	**15**	0,005	0,006	0,007	0,010	0,013	0,015
		S.1.2	950 N/mm² / 280 HB	**15**	0,005	0,006	0,007	0,010	0,013	0,015
		S.2.1	840 N/mm² / 250 HB	10	0,005	0,006	0,007	0,010	0,013	0,015
		S.2.2	1180 N/mm² / 350 HB	10	0,005	0,006	0,007	0,010	0,013	0,015
		S.2.3	1080 N/mm² / 320 HB	10	0,005	0,006	0,007	0,010	0,013	0,015
	Titanium alloys	S.3.1	400 N/mm²	**30**	0,005	0,006	0,007	0,010	0,013	0,015
		S.3.2	1050 N/mm² / 320 HB	**20**	0,005	0,006	0,007	0,010	0,013	0,015
		S.3.3	1400 N/mm² / 410 HB							
H	Hardened steel	H.1.1	46–55 HRC							
		H.1.2	56–60 HRC							
		H.1.3	61–65 HRC							
		H.1.4	66–70 HRC							
	Chilled iron	H.2.1	400 HB							
	Hardened cast iron	H.3.1	55 HRC							
O	Non-metal materials	O.1.1	≤ 150 N/mm²							
		O.1.2	≤ 100 N/mm²							
		O.2.1	≤ 1000 N/mm²							
		O.2.2	≤ 1000 N/mm²							
		O.3.1								

*** Tensile strength**

The cutting data depends extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced according to the application conditions.

WTX – Micropilot application recommendation

General references

It is advisable to use the tool with external cooling. Be careful to ensure that the coolant is aimed directly at the tool tip. This will ensure that there is adequate cooling and effective chip evacuation.
Apply our cutting data recommendations when using the tool.

1. Pilot hole in angled or curved surfaces

Produce pilot hole in one go up to a maximum hole depth of 2.5xD. Angled or curved surfaces can be machined up to a max. inclination of 50° without prior spot-facing. Applying a countersink at the hole entrance is not possible on angled or curved surfaces.

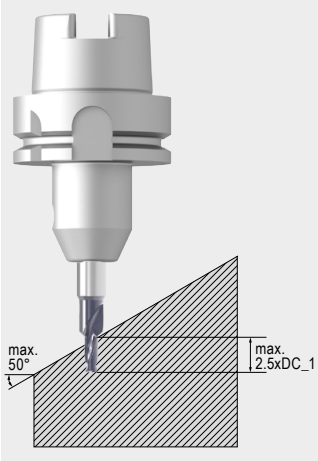

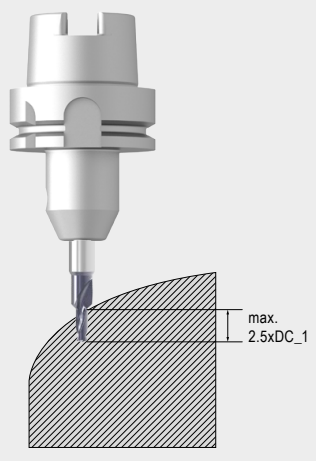

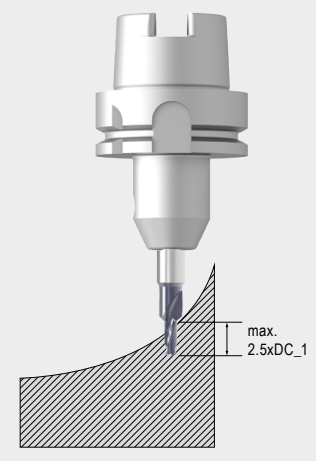

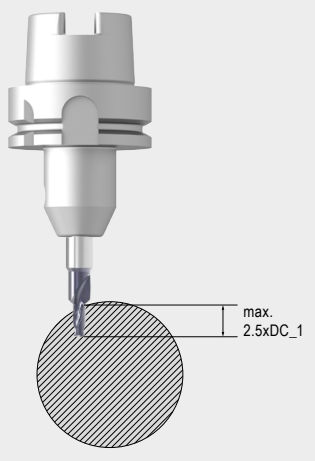

2. Pilot drill with 90° chamfer

Produce pilot hole in a single sweep. If required, a 90° chamfer can additionally be produced at the hole entrance (with flat drilling application) after the 2.5xD hole depth is reached.

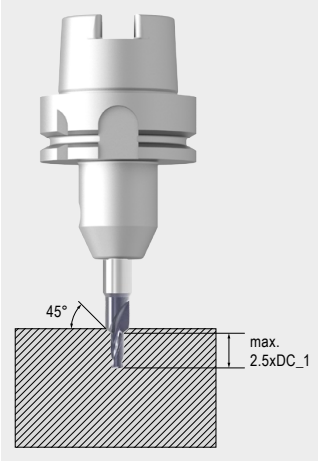

Calculating pilot hole depth with angled drilling application

With an angled drilling application, the remaining depth of the pilot hole will change depending on the angle of inclination. This can be determined using the formula below:

$$L = SDL_1 - (DC_1 \times \tan(\alpha))$$

DC_1 = Cutting diameter
SDL_1 = Step length (max. 2.5xDC_1)
α = Component surface angle of inclination (max. 50°)
L = Remaining pilot hole depth

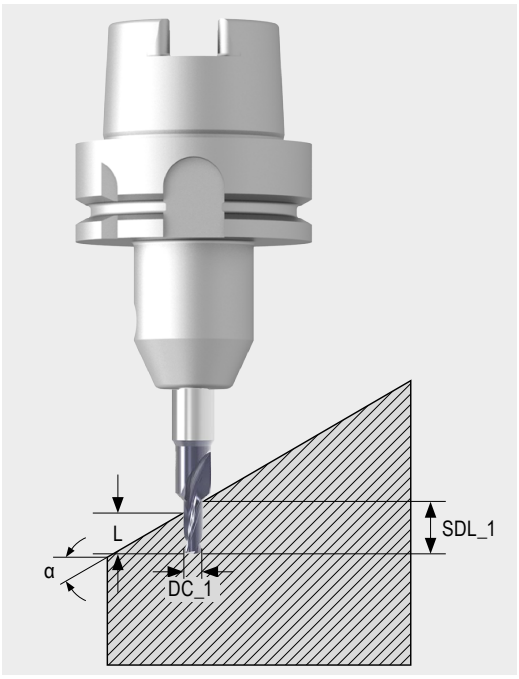

Calculating maximum hole depth with 90° countersink

The maximum hole depth incl. 90° countersink can be found using the formula below.

$$L = \left(\frac{DC_2 - DC_1}{2}\right) + SDL_1$$

DC_1 = Cutting diameter
DC_2 = Max. countersink diameter
SDL_1 = Step length (max. 2.5xDC_1)
L = Max. hole depth incl. countersink

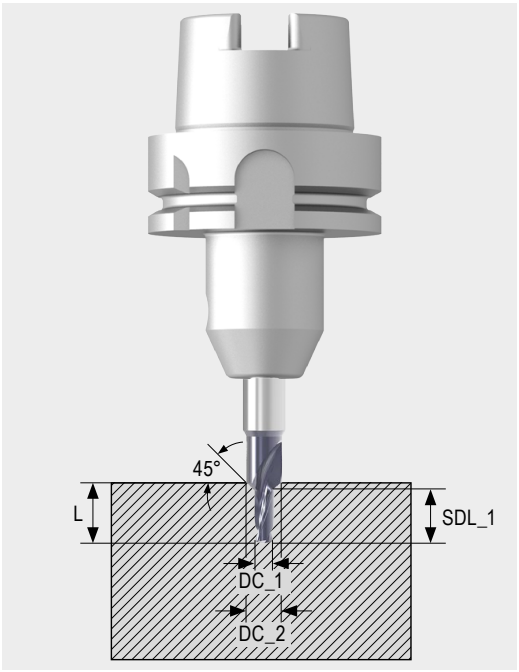

Tolerances and angles

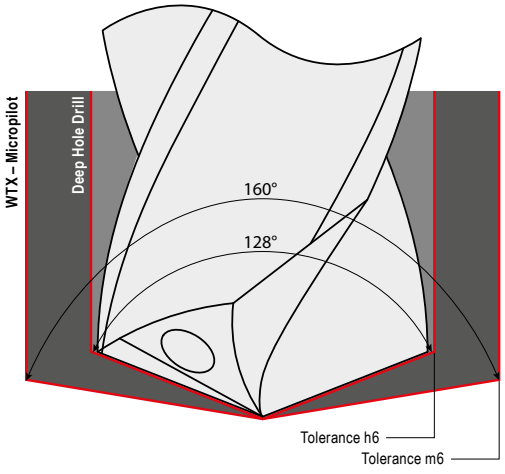

The following must apply to use the pilot and deep hole twist drill consecutively and without collisions:
ΔD = ØD (pilot hole) – ØD (deep hole) > 0

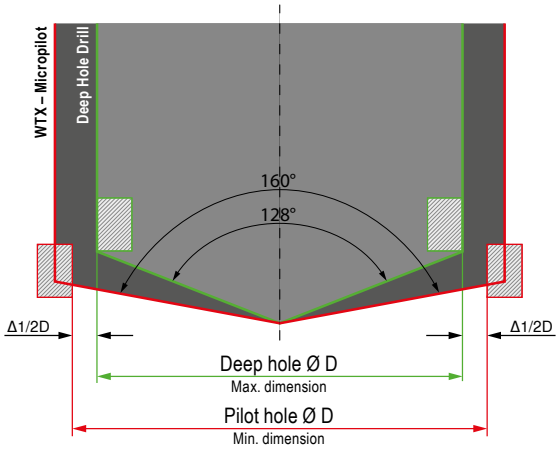

MonoThread – Circular shank thread milling cutter

▲ Profile corrected



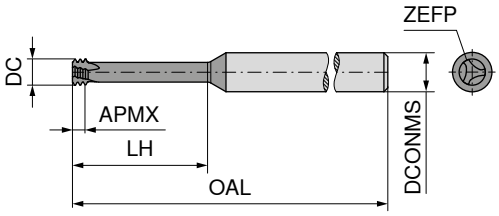

NEW

AlTiN



Solid carbide

50 545 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS h6 mm	ZEFP	EUR W1/5D	
1,53	M2	0,40	39	0,80	6,0	3	3	91,09	**02000**
2,37	M3	0,50	58	1,35	9,5	6	3	91,09	**03000**
3,10	M4	0,70	58	1,95	12,5	6	3	91,09	**04000**
3,80	M5	0,80	58	2,30	16,0	6	3	91,09	**05000**
4,65	M6	1,00	58	2,70	20,0	6	3	91,09	**06000**
6,00	M8	1,25	58	3,20	24,0	6	3	91,09	**08000**
7,80	M10	1,50	64	3,80	31,5	8	3	113,50	**10000**
9,00	M12	1,75	73	4,55	37,8	10	3	127,60	**12000**

NEW

50 550 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS h6 mm	ZEFP	EUR W1/5D	
1,53	M2	0,40	39	1,00	10,4	3	3	102,50	**02000**[1)]
2,37	M3	0,50	39	1,30	12,5	3	3	97,97	**03000**
3,10	M4	0,70	58	1,80	16,7	6	3	97,97	**04000**
4,00	M5	0,80	58	2,10	20,8	6	3	97,97	**05000**
4,80	M6	1,00	58	2,55	25,0	6	3	97,97	**06000**
6,40	M8	1,25	64	3,15	33,5	8	3	121,40	**08000**
8,00	M10	1,50	76	3,85	41,5	8	3	121,40	**10000**

P	●
M	○
K	●
N	●
S	●
H	
O	●

1) 5xD

→ v_c/f_z Page 21

→ **Chapter 7 – Circular and Thread Milling**

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used.

MonoThread – Circular shank thread milling cutter

▲ Profile corrected



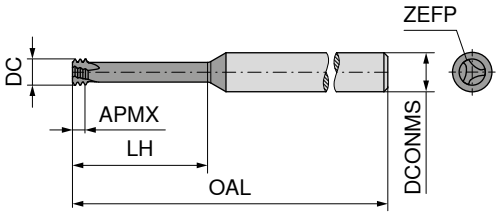

NEW

AlTiN



Solid carbide

50 557 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS $_{h6}$ mm	ZEFP	EUR W1/5D	
3,678	UNC No.10-No.12	1,058	58	3,17	15,5	6	3	102,70	**01000**
4,697	UNC 1/4	1,27	58	3,81	19,0	6	3	102,70	**01400**
6,000	UNC 5/16	1,411	58	4,23	23,0	6	3	102,70	**51600**
7,345	UNC 3/8	1,588	64	4,76	30,2	8	3	131,00	**03800**
7,700	UNC 7/16	1,814	64	5,44	35,2	8	3	131,00	**71600**
9,376	UNC 1/2	1,954	73	5,86	40,1	10	3	147,80	**01200**
10,920	UNC 9/16	2,117	105	6,35	45,0	12	3	194,00	**91600**
11,419	UNC 5/8	2,309	105	6,93	50,0	12	3	194,00	**05800**
15,210	UNC 3/4	2,540	105	7,62	59,7	16	4	283,30	**03400**

NEW

50 559 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS $_{h6}$ mm	ZEFP	EUR W1/5D	
4,696	UNF 1/4	0,907	58	2,72	19,0	6	3	102,70	**01400**
6,217	UNF 5/16, 3/8	1,058	64	3,17	24,0	8	3	131,00	**51600**
7,994	UNF 7/16	1,270	64	3,81	34,5	8	3	131,00	**71600**
11,993	UNF 5/8	1,411	105	4,23	49,0	12	4	205,60	**05800**

P	●
M	○
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 21

→ Chapter 7 – Circular and Thread Milling

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used.

MonoThread – Circular shank thread milling cutter

▲ Profile corrected

ZSGF | UNC | UNF | 60°

≤ 2xD | R/L

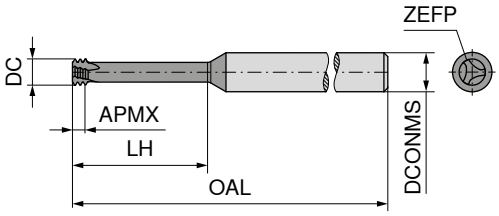

NEW

AlTiN



Solid carbide

50 568 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS h6 mm	ZEFP	EUR W1/5D	
1,400	UNC No.1 / UNF No.2	0,397	58	1,19	3,8	6	3	93,24	**01200**
1,646	UNC No.2 / UNF No.3	0,454	58	1,36	4,4	6	3	93,24	**02300**
1,901	UNC No.3 / UNF No.4	0,529	58	1,59	5,2	6	3	93,24	**03400**
2,034	UNC No.4	0,635	58	1,91	6,3	6	3	103,70	**04000**
2,416	UNC No.5 / UNF No.6	0,635	58	1,91	7,0	6	3	103,70	**05600**

≤ 2xD | G | 55°

NEW

50 569 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS h6 mm	ZEFP	EUR W1/5D	
7,790	G1/8	0,907	64	2,72	19,5	8	3	115,00	**01800**
10,015	G 1/4-3/8	1,337	73	4,01	30,0	10	4	136,00	**01400**
12,013	G 1/2-G7/8	1,814	84	5,44	37,0	12	4	168,50	**01200**
15,900	G 1-2	2,309	105	6,93	44,0	16	4	221,00	**01000**

P	●
M	○
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 21

→ **Chapter 7 – Circular and Thread Milling**
When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used.

MonoThread – Thread Milling Cutter

▲ Profile corrected



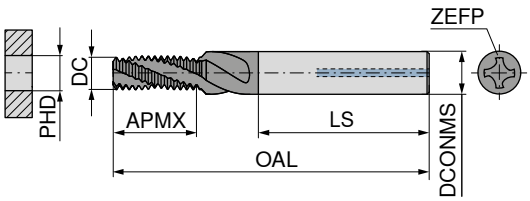

NEW

AlTiN

Solid carbide

50 524 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS h6 mm	ZEFP	PHD mm	EUR W1/5D	
4,70	UNJC 1/4-20	0,907	55	14,27	36	6	4	5,6	175,60	**01400**
6,22	UNJC 5/16-18	1,411	62	16,32	36	8	4	7,0	191,00	**05160**
7,79	UNJC 3/8-16	1,588	74	20,01	40	10	4	8,6	204,80	**03800**
8,57	UNJC 7/16-14	1,814	79	22,87	45	12	4	10,0	258,40	**07160**
9,38	UNJC 1/2-13	1,270	79	26,75	45	12	5	11,5	258,40	**01200**

NEW

50 533 ...

DC mm	Thread	TP mm	OAL mm	APMX mm	LS mm	DCONMS h6 mm	ZEFP	PHD mm	EUR W1/5D	
2,44	UNJF 6-40	0,635	42	7,42	28	4	3	2,95	155,90	**06000**
3,14	UNJF 8-36	0,706	49	8,91	36	6	3	3,50	170,50	**08000**
3,95	UNJF 10-32	0,794	55	9,97	36	6	3	4,10	170,50	**10000**
4,70	UNJF 1/4-28	0,907	55	14,27	36	6	4	5,60	175,60	**01400**
6,22	UNJF 5/16-24	1,058	62	16,59	36	8	4	7,00	191,00	**05160**
7,79	UNJF 3/8-24	1,058	74	19,77	40	10	4	8,60	204,80	**03800**
9,32	UNJF 7/16-20	1,270	79	22,39	45	12	5	10,00	204,80	**07160**
9,38	UNJF 1/2-20	1,270	79	25,34	45	12	5	11,50	258,40	**01200**
12,90	UNJF 5/8-18	1,411	102	33,59	48	16	5	14,50	310,90	**05800**

P	●
M	●
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 21

→ **Chapter 7 – Circular and Thread Milling**

When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used.

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values

Index	50 545 ..., 50 550 ..., 50 557 ..., 50 559 ..., 50 568 ..., 50 569 ...				50 524 ..., 50 533 ...			
	ZSGF	AlTiN – Performance Solid carbide			SGF	AlTiN – Performance Solid carbide		
		Ø 1,5 – 5,9	Ø 6,0 – 11,9	Ø 12,0 – 20,0		Ø 2,4 – 5,9	Ø 6,0 – 11,9	Ø 12,0 – 20,0
	v_c (m/min)	f_z (mm/tooth)			v_c (m/min)	f_z (mm/tooth)		
P.1.1	60–120	0,04–0,11	0,13–0,17	0,18–0,20	80–150	0,015–0,04	0,04–0,08	0,08–0,15
P.1.2	60–120	0,04–0,11	0,13–0,17	0,18–0,20	80–120	0,015–0,04	0,04–0,08	0,08–0,15
P.1.3	60–120	0,04–0,11	0,13–0,17	0,18–0,20	80–120	0,015–0,04	0,04–0,08	0,08–0,15
P.1.4	60–120	0,04–0,11	0,13–0,17	0,18–0,20	80–120	0,015–0,04	0,04–0,08	0,08–0,15
P.1.5	60–120	0,04–0,11	0,13–0,17	0,18–0,20	60–100	0,01–0,04	0,04–0,06	0,04–0,10
P.2.1	60–90	0,03–0,08	0,09–0,14	0,14–0,18	80–120	0,015–0,04	0,04–0,08	0,08–0,15
P.2.2	60–90	0,03–0,08	0,09–0,14	0,14–0,18	80–100	0,015–0,04	0,04–0,08	0,08–0,15
P.2.3	60–90	0,03–0,08	0,09–0,14	0,14–0,18	80–100	0,010–0,04	0,04–0,08	0,08–0,15
P.2.4	60–90	0,03–0,08	0,09–0,14	0,14–0,18	80–100	0,010–0,04	0,04–0,08	0,08–0,15
P.3.1	50–80	0,03–0,08	0,09–0,14	0,14–0,18	70–90	0,01–0,03	0,03–0,05	0,06–0,12
P.3.2	50–80	0,03–0,08	0,09–0,14	0,14–0,18	60–80	0,006–0,02	0,02–0,04	0,04–0,06
P.3.3	50–80	0,03–0,08	0,09–0,14	0,14–0,18	50–70	0,006–0,02	0,02–0,04	0,04–0,06
P.4.1	50–80	0,03–0,08	0,09–0,14	0,14–0,18	70–90	0,006–0,02	0,02–0,04	0,04–0,06
P.4.2	50–80	0,03–0,08	0,09–0,14	0,14–0,18	60–80	0,006–0,02	0,02–0,04	0,04–0,06
M.1.1	60–90	0,02–0,06	0,06–0,11	0,12–0,13	60–100	0,01–0,04	0,04–0,08	0,08–0,10
M.2.1	60–90	0,02–0,06	0,06–0,11	0,12–0,13	60–100	0,01–0,03	0,03–0,06	0,06–0,10
M.3.1	60–90	0,02–0,06	0,06–0,11	0,12–0,13	60–100	0,01–0,03	0,03–0,06	0,06–0,10
K.1.1	40–80	0,04–0,11	0,13–0,17	0,17–0,18	80–120	0,02–0,06	0,06–0,12	0,10–0,15
K.1.2	40–80	0,04–0,11	0,13–0,17	0,17–0,18	80–120	0,02–0,05	0,05–0,10	0,10–0,12
K.2.1	40–80	0,04–0,11	0,13–0,17	0,17–0,18	80–100	0,02–0,05	0,05–0,10	0,08–0,15
K.2.2	40–80	0,04–0,11	0,13–0,17	0,17–0,18	80–100	0,02–0,05	0,05–0,10	0,08–0,12
K.3.1	40–80	0,04–0,11	0,13–0,17	0,17–0,18	80–100	0,015–0,05	0,05–0,08	0,08–0,12
K.3.2	40–80	0,04–0,11	0,13–0,17	0,17–0,18	80–100	0,015–0,03	0,03–0,08	0,08–0,12
N.1.1	100–200	0,04–0,11	0,13–0,16	0,17–0,18	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.1.2	100–200	0,04–0,11	0,13–0,16	0,17–0,18	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.2.1	100–200	0,04–0,1	0,07–0,16	0,17–0,18	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.2.2	100–200	0,04–0,1	0,07–0,16	0,17–0,18	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.2.3	60–140	0,04–0,06	0,07–0,11	0,13–0,14	100–250	0,04–0,09	0,08–0,15	0,12–0,20
N.3.1	50–200	0,05–0,16	0,14–0,19	0,19–0,20	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.3.2	50–200	0,05–0,16	0,14–0,19	0,19–0,20	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.3.3	50–200	0,05–0,16	0,14–0,19	0,19–0,20	100–400	0,04–0,09	0,08–0,15	0,12–0,20
N.4.1	50–200	0,04–0,11	0,07–0,17	0,17–0,18	100–400	0,04–0,09	0,08–0,15	0,12–0,20
S.1.1	20–40	0,03–0,05	0,06–0,07	0,08	40–100	0,01–0,04	0,04–0,07	0,07–0,12
S.1.2	20–40	0,03–0,05	0,06–0,07	0,08				
S.2.1	20–40	0,03–0,05	0,06–0,07	0,08				
S.2.2	20–40	0,03–0,05	0,06–0,07	0,08				
S.2.3	20–40	0,03–0,05	0,06–0,07	0,08				
S.3.1	20–40	0,03–0,05	0,06–0,07	0,08	40–100	0,01–0,04	0,04–0,07	0,07–0,15
S.3.2	20–40	0,03–0,05	0,06–0,07	0,08				
S.3.3	20–40	0,03–0,05	0,06–0,07	0,08				
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1	100–200	0,06–0,16	0,19–0,22	0,22–0,3	100–400	0,03–0,08	0,08–0,15	0,15–0,20
O.1.2	100–200	0,06–0,16	0,19–0,22	0,22–0,3	100–400	0,03–0,08	0,08–0,15	0,15–0,20
O.2.1	100–200	0,06–0,16	0,19–0,22	0,22–0,3	50–80	0,03–0,08	0,08–0,15	0,15–0,20
O.2.2	100–200	0,06–0,16	0,19–0,22	0,22–0,3	50–80	0,03–0,08	0,08–0,15	0,15–0,20
O.3.1	60–140	0,05–0,15	0,14–0,20	0,20–0,25				

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

MaxiLock-D – DCLN 95° DC – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key



Illustrations show right-hand versions



ISO designation	H	B	OAL	LH	WF	CRNT	CNT	torque moment	Insert	NEW Left-hand 70 510 ... EUR 2A/24		NEW Right-hand 70 510 ... EUR 2A/24	
	mm	mm	mm	mm	mm			Nm					
DCLN R/L 2020 X09 DC	20	20	94	25	25	M6	G1/8"	2	CN.. 0903	232,42	**52000**	232,42	**52001**
DCLN R/L 2020 X12 DC	20	20	101	32	25	M6	G1/8"	4	CN.. 1204	232,42	**62000**	232,42	**62001**
DCLN R/L 2525 X12 DC	25	25	116	32	32	M6	G1/8"	4	CN.. 1204	232,42	**62500**	232,42	**62501**
DCLN R/L 3225 X12 DC	32	25	132	32	32	M6	G1/8"	4	CN.. 1204	255,03	**63200**	255,03	**63201**
DCLN R/L 2525 X16 DC	25	25	122	38	32	M6	G1/8"	6,5	CN.. 1606	257,39	**72500**	257,39	**72501**
DCLN R/L 3232 X16 DC	32	32	142	42	40	M6	G1/8"	6,5	CN.. 1606	262,73	**73200**	262,73	**73201**
DCLN R/L 3232 X19 DC	32	32	142	42	40	M6	G1/8"	6,5	CN.. 1906	269,36	**83200**	269,36	**83201**
DCLN R/L 4040 X19 DC	40	40	167	42	50	M6	G1/8"	6,5	CN.. 1906	277,65	**94000**	277,65	**94001**

Clamping screw

Carbide type C

Grubscrew

Spare parts for Article no.	70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 510 52000 / 70 510 52001	M3x7 - IP	4,14 **819**	9,19	**848**	M6x6	3,84 **86700**
70 510 62000 / 70 510 62001	M4,5x12 - IP	3,84 **820**	10,17	**810**	M6x6	3,84 **86700**
70 510 62500 / 70 510 62501	M4,5x12 - IP	3,84 **820**	10,17	**810**	M6x6	3,84 **86700**
70 510 63200 / 70 510 63201	M4,5x12 - IP	3,84 **820**	10,17	**810**	M6x6	3,84 **86700**
70 510 72500 / 70 510 72501	M5x14 - IP	5,46 **821**	15,53	**814**	M6x6	3,84 **86700**
70 510 73200 / 70 510 73201	M5x14 - IP	5,46 **821**	15,53	**814**	M6x6	3,84 **86700**
70 510 83200 / 70 510 83201	M5x14 - IP	5,46 **821**	16,64	**816**	M6x6	3,84 **86700**
70 510 94000 / 70 510 94001	M5x14 - IP	5,46 **821**	16,64	**816**	M6x6	3,84 **86700**

XPress type

Key D

Coolant screw plug

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 510 52000 / 70 510 52001	30,48	**823**	T09 - IP	14,50 **126**	G 1/8"	4,59 **294**
70 510 62000 / 70 510 62001	30,06	**824**	T15 - IP	15,33 **128**	G 1/8"	4,59 **294**
70 510 62500 / 70 510 62501	30,06	**824**	T15 - IP	15,33 **128**	G 1/8"	4,59 **294**
70 510 63200 / 70 510 63201	30,06	**824**	T15 - IP	15,33 **128**	G 1/8"	4,59 **294**
70 510 72500 / 70 510 72501	33,74	**825**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**
70 510 73200 / 70 510 73201	33,74	**825**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**
70 510 83200 / 70 510 83201	36,92	**826**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**
70 510 94000 / 70 510 94001	36,92	**826**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**

MaxiLock-D – DCBN 75° DC – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key



Illustrations show right-hand versions



										NEW Left-hand		NEW Right-hand	
										70 507 ...		**70 507 ...**	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
DCBN R/L 2525 X12 DC	25	25	114	30	22	M6	G1/8"	4	CN.. 1204	232,42	**82500**	232,42	**82501**
DCBN R/L 2525 X16 DC	25	25	120	36	22	M6	G1/8"	6,5	CN.. 1606	257,39	**62500**	257,39	**62501**

Clamping screw

Carbide type C

Grubscrew

		70 950 ...		**70 950 ...**			**70 950 ...**		
Spare parts for Article no.		EUR 2A/28		EUR 2A/28			EUR 2A/28		
70 507 82500 / 70 507 82501	M4,5x12 - IP	3,84	**820**	10,17	**810**	M6x6	3,84	**86700**
70 507 62500 / 70 507 62501	M5x14 - IP	5,46	**821**	15,53	**814**	M6x6	3,84	**86700**

XPress type

Key D

Coolant screw plug

		70 950 ...			**80 950 ...**		**70 950 ...**	
Spare parts for Article no.		EUR 2A/28			EUR Y7		EUR 2A/28	
70 507 82500 / 70 507 82501		30,06	**824**	T15 - IP	15,33	**128**	G 1/8"	4,59	**294**
70 507 62500 / 70 507 62501		33,74	**825**	T20 - IP	16,17	**129**	G 1/8"	4,59	**294**

MaxiLock-D – DDJN 93° DC – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions



ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	NEW Left-hand 70 546 ... EUR 2A/24		NEW Right-hand 70 546 ... EUR 2A/24	
DDJN R/L 2020 X11 DC	20	20	99	30	25	M6	G1/8"	2	DN.. 1104	232,42	**82000**	232,42	**82001**
DDJN R/L 2525 X11 DC	25	25	114	30	32	M6	G1/8"	2	DN.. 1104	232,42	**82500**	232,42	**82501**
DDJN R/L 2020 X15 DC	20	20	109	40	25	M6	G1/8"	4	DN.. 1504 / 1506	232,42	**72000**	232,42	**72001**
DDJN R/L 2525 X15 DC	25	25	124	40	32	M6	G1/8"	4	DN.. 1504 / 1506	238,56	**72500**	238,56	**72501**
DDJN R/L 3225 X15 DC	32	25	140	40	32	M6	G1/8"	4	DN.. 1504 / 1506	255,03	**73200**	255,03	**73201**

When using DN.. 1504 indexable inserts, use insert seat article no. **70 950 40000**.

Clamping screw

Solid Carbide Seat D

Grubscrew

Spare parts for Article no.	70 950 ...	EUR 2A/28		70 950 ...	EUR 2A/28		70 950 ...	EUR 2A/28	
70 546 82000 / 70 546 82001	M3x7 - IP	4,14	**819**		4,55	**808**	M6x6	3,84	**86700**
70 546 82500 / 70 546 82501	M3x7 - IP	4,14	**819**		4,55	**808**	M6x6	3,84	**86700**
70 546 72000 / 70 546 72001	M4,5x12 - IP	3,84	**820**		10,17	**811**	M6x6	3,84	**86700**
70 546 72500 / 70 546 72501	M4,5x12 - IP	3,84	**820**		10,17	**811**	M6x6	3,84	**86700**
70 546 73200 / 70 546 73201	M4,5x12 - IP	3,84	**820**		10,17	**811**	M6x6	3,84	**86700**

XPress type

Key D

Coolant screw plug

Spare parts for Article no.	70 950 ...	EUR 2A/28		80 950 ...	EUR Y7		70 950 ...	EUR 2A/28	
70 546 82000 / 70 546 82001	36,37	**835**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**	
70 546 82500 / 70 546 82501	36,37	**835**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**	
70 546 72000 / 70 546 72001	30,06	**824**	T15 - IP	15,33	**128**	G 1/8"	4,59	**294**	
70 546 72500 / 70 546 72501	30,06	**824**	T15 - IP	15,33	**128**	G 1/8"	4,59	**294**	
70 546 73200 / 70 546 73201	30,06	**824**	T15 - IP	15,33	**128**	G 1/8"	4,59	**294**	

MaxiLock-D – DSSN 45° DC – Toolholder with top clamping

Scope of supply:

Tool holder with Torx key



Illustrations show right-hand versions



										NEW Left-hand	NEW Right-hand
										70 517 ...	**70 517 ...**
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	EUR 2A/24
DSSN R/L 2020 X12 DC	20	20	104	35	16,7	M6	G1/8"	4	SN.. 1204	232,42 **62000**	232,42 **62001**
DSSN R/L 2525 X12 DC	25	25	119	35	24,2	M6	G1/8"	4	SN.. 1204	232,42 **62500**	232,42 **62501**
DSSN R/L 3225 X12 DC	32	25	135	35	24,2	M6	G1/8"	4	SN.. 1204	255,03 **63200**	255,03 **63201**

Clamping screw

Solid Carbide support S

Grubscrew

			70 950 ...		**70 950 ...**			**70 950 ...**
Spare parts for Article no.			EUR 2A/28		EUR 2A/28			EUR 2A/28
70 517 62000 / 70 517 62001	M4,5x12 - IP	3,84	**820**	10,17	**813**	M6x6	3,84	**86700**
70 517 62500 / 70 517 62501	M4,5x12 - IP	3,84	**820**	10,17	**813**	M6x6	3,84	**86700**
70 517 63200 / 70 517 63201	M4,5x12 - IP	3,84	**820**	10,17	**813**	M6x6	3,84	**86700**

XPress type

Key D

Coolant screw plug

			70 950 ...		**80 950 ...**			**70 950 ...**
Spare parts for Article no.			EUR 2A/28		EUR Y7			EUR 2A/28
70 517 62000 / 70 517 62001	T15 - IP	30,06	**824**	15,33	**128**	G 1/8"	4,59	**294**
70 517 62500 / 70 517 62501	T15 - IP	30,06	**824**	15,33	**128**	G 1/8"	4,59	**294**
70 517 63200 / 70 517 63201	T15 - IP	30,06	**824**	15,33	**128**	G 1/8"	4,59	**294**

MaxiLock-D – DSBN 75° DC – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key





Illustrations show right-hand versions

NEW
Right-hand

ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	70 522 ... EUR 2A/24	
DSBN R 2020 X12 DC	20	20	104	35	17,2	M6	G1/8"	4	SN.. 1204	232,42	**62001**
DSBN R 2525 X12 DC	25	25	119	35	22,2	M6	G1/8"	4	SN.. 1204	232,42	**62501**
DSBN R 2525 X15 DC	25	25	127	33	22,3	M6	G1/8"	6,5	SN.. 1506	257,39	**72501**
DSBN R 3232 X15 DC	32	32	142	42	26,1	M6	G1/8"	6,5	SN.. 1506	255,03	**73201**
DSBN R 3232 X19 DC	32	32	148	48	27,3	M6	G1/8"	6,5	SN.. 1906	255,03	**83201**
DSBN R 4040 X19 DC	40	40	173	48	35,3	M6	G1/8"	6,5	SN.. 1906	277,65	**84001**

Clamping screw

Solid Carbide support S

Grubscrew

Spare parts for Article no.	70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28	
70 522 62001	M4,5x12 - IP	3,84 **820**	10,17	**813**	M6x6	3,84 **86700**
70 522 62501	M4,5x12 - IP	3,84 **820**	10,17	**813**	M6x6	3,84 **86700**
70 522 72501	M5x14 - IP	5,46 **821**	15,53	**833**	M6x6	3,84 **86700**
70 522 73201	M5x14 - IP	5,46 **821**	15,53	**833**	M6x6	3,84 **86700**
70 522 83201	M5x14 - IP	5,46 **821**	16,64	**817**	M6x6	3,84 **86700**
70 522 84001	M5x14 - IP	5,46 **821**	16,64	**817**	M6x6	3,84 **86700**

XPress type

Key D

Coolant screw plug

Spare parts for Article no.	70 950 ... EUR 2A/28		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
70 522 62001	30,06	**824**	T15 - IP	15,33 **128**	G 1/8"	4,59 **294**
70 522 62501	30,06	**824**	T15 - IP	15,33 **128**	G 1/8"	4,59 **294**
70 522 72501	33,74	**825**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**
70 522 73201	33,74	**825**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**
70 522 83201	36,92	**826**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**
70 522 84001	36,92	**826**	T20 - IP	16,17 **129**	G 1/8"	4,59 **294**

MaxiLock-D – DTJN 93° DC – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions



										NEW Left-hand		NEW Right-hand	
										70 601 ...		**70 601 ...**	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
DTJN R/L 2020 X16 DC	20	20	92	23	25	M6	G1/8"	2	TNM. 1604	232,42	**82000**	232,42	**82001**
DTJN R/L 2525 X16 DC	25	25	107	23	32	M6	G1/8"	2	TNM. 1604	232,42	**82500**	232,42	**82501**

Clamping screw

Solid Carbide Seat T

Grubscrew

		70 950 ...		**70 950 ...**			**70 950 ...**	
Spare parts for Article no.		EUR 2A/28		EUR 2A/28			EUR 2A/28	
70 601 82000 / 70 601 82001	M3x7 - IP	4,14	**819**	8,96	**847**	M6x6	3,84	**86700**
70 601 82500 / 70 601 82501	M3x7 - IP	4,14	**819**	8,96	**847**	M6x6	3,84	**86700**

XPress type

Key D

Coolant screw plug

		70 950 ...			**80 950 ...**		**70 950 ...**	
Spare parts for Article no.		EUR 2A/28			EUR Y7		EUR 2A/28	
70 601 82000 / 70 601 82001	30,48		**823**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**
70 601 82500 / 70 601 82501	30,48		**823**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**

MaxiLock-D – DVJN 93° DC – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key



Illustrations show right-hand versions

										NEW Left-hand		NEW Right-hand	
										70 511 ...		**70 511 ...**	
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24		EUR 2A/24	
DVJN R/L 2020 X16 DC	20	20	104	35	25	M6	G1/8"	2	VN.. 1604	253,34	**62000**	253,34	**62001**
DVJN R/L 2525 X16 DC	25	25	119	35	32	M6	G1/8"	2	VN.. 1604	266,33	**62500**	266,33	**62501**

Clamping screw

Solid Carbide Seat V

Grubscrew

		70 950 ...		**70 950 ...**			**70 950 ...**	
Spare parts for Article no.		EUR 2A/28		EUR 2A/28			EUR 2A/28	
70 511 62000 / 70 511 62001	M3x7 - IP	4,14	**819**	7,22	**806**	M6x6	3,84	**86700**
70 511 62500 / 70 511 62501	M3x7 - IP	4,14	**819**	7,22	**806**	M6x6	3,84	**86700**

XPress type

Key D

Coolant screw plug

		70 950 ...			**80 950 ...**		**70 950 ...**	
Spare parts for Article no.		EUR 2A/28			EUR Y7		EUR 2A/28	
70 511 62000 / 70 511 62001		36,37	**835**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**
70 511 62500 / 70 511 62501		36,37	**835**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**

MaxiLock-D – DWLN 95° DC – Toolholder with top clamping

Scope of supply:
Tool holder with Torx key

Direct Cooling



Illustrations show right-hand versions



										NEW Left-hand	NEW Right-hand
										70 547 ...	**70 547 ...**
ISO designation	H mm	B mm	OAL mm	LH mm	WF mm	CRNT	CNT	torque moment Nm	Insert	EUR 2A/24	EUR 2A/24
DWLN R/L 2020 X06 DC	20	20	94	25	25	M6	G1/8"	2	WN.. 0604	232,42 **62000**	232,42 **62001**
DWLN R/L 2525 X06 DC	25	25	109	25	32	M6	G1/8"	2	WN.. 0604	232,42 **62500**	232,42 **62501**
DWLN R/L 2020 X08 DC	20	20	100	31	25	M6	G1/8"	4	WN.. 0804	232,42 **72000**	232,42 **72001**
DWLN R/L 2525 X08 DC	25	25	118	34	32	M6	G1/8"	4	WN.. 0804	232,42 **72500**	232,42 **72501**

Clamping screw

Solid Carbide Seat W

Grubscrew

										70 950 ...	
Spare parts for Article no.										EUR 2A/28	
70 547 62000 / 70 547 62001	M3x7 - IP	4,14	**819**	M3x7 - IP	4,38	**807**	M6x6	3,84	**86700**		
70 547 62500 / 70 547 62501	M3x7 - IP	4,14	**819**	M3x7 - IP	4,38	**807**	M6x6	3,84	**86700**		
70 547 72000 / 70 547 72001	M4,5x12 - IP	3,84	**820**	M4,5x12 - IP	12,81	**812**	M6x6	3,84	**86700**		
70 547 72500 / 70 547 72501	M4,5x12 - IP	3,84	**820**	M4,5x12 - IP	12,81	**812**	M6x6	3,84	**86700**		

XPress type

Key D

Coolant screw plug

										70 950 ...	
Spare parts for Article no.										EUR 2A/28	
70 547 62000 / 70 547 62001	30,48	**823**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**			
70 547 62500 / 70 547 62501	30,48	**823**	T09 - IP	14,50	**126**	G 1/8"	4,59	**294**			
70 547 72000 / 70 547 72001	30,06	**824**	T15 - IP	15,33	**128**	G 1/8"	4,59	**294**			
70 547 72500 / 70 547 72501	30,06	**824**	T15 - IP	15,33	**128**	G 1/8"	4,59	**294**			

End milling cutter

N | λ_s 35° γ_s 38° γ_s 9° | HPC



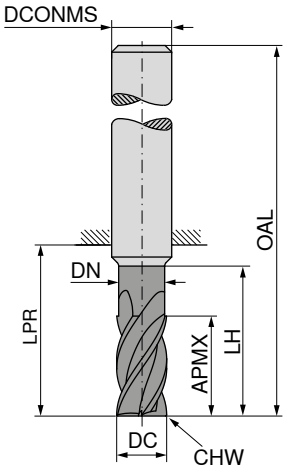

NEW

Ti1000

≈DIN 6527

54 071 ...

DC h10 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V3/5C	
6	13	5,8	21	21	57	6	0,1	4	21,99	**06300**
8	21	7,7	27	27	63	8	0,2	4	28,39	**08300**
10	22	9,7	32	32	72	10	0,2	4	37,22	**10300**
12	26	11,6	38	38	83	12	0,3	4	59,18	**12300**
14	26	11,6	38	38	83	14	0,3	4	80,70	**14300**
16	36	15,5	44	44	92	16	0,3	4	91,30	**16300**
18	36	17,5	44	44	92	18	0,3	4	121,10	**18300**
20	41	19,5	54	54	104	20	0,3	4	137,80	**20300**

P	●
M	●
K	●
N	○
S	○
H	
O	

→ v_c/f_z Page 32+33

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – End mill

Index	Type short / long		54 071 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
	v_c (m/min)	$a_{p\,max.}$ x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
			f_z (mm)															
P.1.1	210	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.2	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.3	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.4	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.1.5	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.1	200	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.2	190	1,0	0,022	0,018	0,011	0,030	0,024	0,015	0,038	0,030	0,019	0,046	0,037	0,023	0,062	0,050	0,031	
P.2.3	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.2.4	170	1,0	0,022	0,018	0,011	0,030	0,024	0,015	0,038	0,030	0,019	0,046	0,037	0,023	0,062	0,050	0,031	
P.3.1	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.3.2	170	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.3.3	140	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
P.4.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
P.4.2	80	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.1.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.2.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
M.3.1	100	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
K.1.1	200	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
K.1.2	180	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
K.2.1	190	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.2.2	170	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.3.1	180	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
K.3.2	160	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	350	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.3.2	350	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.3.3	280	1,0	0,037	0,030	0,019	0,048	0,038	0,024	0,060	0,048	0,030	0,070	0,056	0,035	0,094	0,075	0,047	
N.4.1																		
S.1.1	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.1.2	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.1	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.2	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.2.3	30	1,0	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	
S.3.1	90	1,0	0,028	0,022	0,014	0,038	0,030	0,019	0,049	0,039	0,025	0,060	0,048	0,030	0,080	0,064	0,040	
S.3.2	50	1,0	0,017	0,014	0,009	0,024	0,019	0,012	0,031	0,025	0,016	0,038	0,030	0,019	0,052	0,042	0,026	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling: 3°

Index	54 071 ...												● 1st choice ○ suitable		
	Ø DC (mm) =														
	10			12			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MQL
	f_z (mm)														
P.1.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.4	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.1.5	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.2	0,078	0,062	0,039	0,094	0,075	0,047	0,118	0,094	0,059	0,134	0,107	0,067	●	○	○
P.2.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.4	0,078	0,062	0,039	0,094	0,075	0,047	0,118	0,094	0,059	0,134	0,107	0,067	●	○	○
P.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.3	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.4.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.1.2	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.2.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
K.3.2	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.3.2	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.3.3	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●		
N.4.1															
S.1.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

MaxiMill – HFCD high-feed screw-in cutter

▲ Programmed radius r3D = 2.0 mm



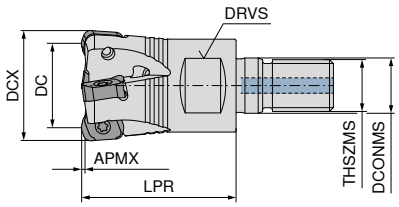

NEW

Designation	DC mm	DCX mm	ZNF	APMX mm	LPR mm	DCONMS mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	50 357 ... EUR 2B/40	
GHFCD.16.R.02-06	10	16	2	0,8	27	8,5	M8	10	23500	1,2	XNEU 06T3..	292,00	**01602**
GHFCD.20.R.03-06	14	20	3	0,8	33	10,5	M10	15	20200	1,2	XNEU 06T3..	331,00	**02003**
GHFCD.25.R.04-06	19	25	4	0,8	35	12,5	M12	17	18100	1,2	XNEU 06T3..	371,00	**02504**
GHFCD.32.R.05-06	26	32	5	0,8	35	17,0	M16	24	17300	1,2	XNEU 06T3..	410,00	**03205**
GHFCD.35.R.06-06	29	35	6	0,8	35	17,0	M16	24	16100	1,2	XNEU 06T3..	434,00	**03506**
GHFCD.42.R.06-06	36	42	6	0,8	35	17,0	M16	24	14100	1,2	XNEU 06T3..	451,00	**04206**

MaxiMill – HFCD high-feed end mill

▲ Programmed radius r3D = 2.0 mm



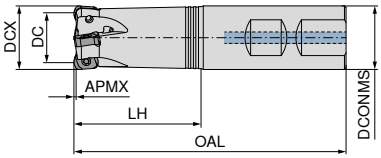

NEW NEW

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS $_{h6}$ mm	RPMX 1/min.	torque moment Nm	Insert	50 356 ... EUR 2B/40		50 356 ... EUR 2B/40	
CHFCD.16.R.02-06-B-40	10	16	2	0,8	89	40	16	21700	1,2	XNEU 06T3..			292,00	**11602**
CHFCD.16.R.02-06-A-40	10	16	2	0,8	89	40	16	21700	1,2	XNEU 06T3..	292,00	**01602**		
CHFCD.16.R.02-06-A-40-200	10	16	2	0,8	200	40	16	12300	1,2	XNEU 06T3..	292,00	**21602**		
CHFCD.20.R.03-06-B-50	14	20	3	0,8	101	50	20	17000	1,2	XNEU 06T3..			331,00	**12003**
CHFCD.20.R.03-06-A-50	14	20	3	0,8	101	50	20	17000	1,2	XNEU 06T3..	331,00	**02003**		
CHFCD.20.R.03-06-A-50-225	14	20	3	0,8	225	50	20	8700	1,2	XNEU 06T3..	331,00	**22003**		
CHFCD.25.R.04-06-B-50	19	25	4	0,8	107	50	25	15400	1,2	XNEU 06T3..			371,00	**12504**
CHFCD.25.R.04-06-A-50	19	25	4	0,8	107	50	25	15400	1,2	XNEU 06T3..	371,00	**02504**		
CHFCD.25.R.04-06-A-50-225	19	25	4	0,8	225	50	25	7100	1,2	XNEU 06T3..	371,00	**22504**		
CHFCD.32.R.05-06-B25-50	26	32	5	0,8	107	50	25	14400	1,2	XNEU 06T3..			410,00	**13205**
CHFCD.32.R.05-06-A25-50	26	32	5	0,8	107	50	25	14400	1,2	XNEU 06T3..	410,00	**03205**		
CHFCD.32.R.05-06-A25-50-225	26	32	5	0,8	225	50	25	6400	1,2	XNEU 06T3..	410,00	**23205**		

MaxiMill – HFCD high-feed face mill

▲ Programmed radius r3D = 2.0 mm







NEW

50 358 ...

Designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DCONMS $_{H6}$ mm	DHUB mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
AHFCD.32.R.05-06	26	32	5	0,8	40	16	38	17300	1,2	XNEU 06T3..	410,00	**03205**
AHFCD.35.R.05-06	29	35	5	0,8	40	16	38	16100	1,2	XNEU 06T3..	434,00	**03505**
AHFCD.40.R.06-06	34	40	6	0,8	40	16	38	14600	1,2	XNEU 06T3..	451,00	**04006**
AHFCD.42.R.06-06	36	42	6	0,8	40	16	38	14100	1,2	XNEU 06T3..	451,00	**04206**
AHFCD.50.R.07-06	44	50	7	0,8	40	22	43	12500	1,2	XNEU 06T3..	502,00	**05007**
AHFCD.52.R.08-06	46	52	8	0,8	40	22	43	12200	1,2	XNEU 06T3..	527,00	**05208**
AHFCD.63.R.09-06	57	63	9	0,8	40	22	48	10800	1,2	XNEU 06T3..	577,00	**06309**
AHFCD.66.R.10-06	60	66	10	0,8	40	22	48	10500	1,2	XNEU 06T3..	602,00	**06610**

	TORX® blade	Key D	Molykote	Clamping screw	Torque screwdriver
	80 950 ...	**80 950 ...**	**70 950 ...**	**70 950 ...**	**80 950 ...**
Spare parts	EUR	EUR	EUR	EUR	EUR
Insert	Y7	Y7	2A/28	2A/28	Y7
XNEU 06T3..	6,13 **033**	10,05 **110**	5,64 **303**	2,99 **13800**	165,90 **192**

XNEU

Designation	IC	D1	INSL	r3D	S
	mm	mm	mm	mm	mm
XNEU 06T3..	6,05	2,8	9,65	2	3,0



XNEU

		NEW	NEW	NEW	NEW	NEW
		-M50 CTCP230	-M50 CTPP235	-F50 CTPM240	-M50 CTPM240	-F50 CTPM245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		XNEU	XNEU	XNEU	XNEU	XNEU
		51 261 ...	51 261 ...	51 260 ...	51 261 ...	51 260 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17
06T318SER	1,8	18,20 01800	18,20 11800	18,20 41800	18,20 41800	22,10 41801
P		●	●	○	○	●
M			○	●	●	●
K		○	○			
N						
S						
H						
O						

XNEU

		NEW	NEW	NEW	NEW	NEW
		-F50 CTCM245	-R50 CTCK215	-R50 CTPK220	-F40 CTC5240	-F40 CTCS245
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		XNEU	XNEU	XNEU	XNEU	XNEU
		51 260 ...	51 262 ...	51 262 ...	51 259 ...	51 259 ...
ISO	RE mm	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1H/17
06T318ER	1,8				22,10 11801	22,10 51801
06T318SER	1,8	22,10 91801	18,20 51800	18,20 61800		
P		●				
M		●				
K			●	●		
N						
S		○			●	●
H						
O						

MaxiMill – Tangent-09 screw-in cutter



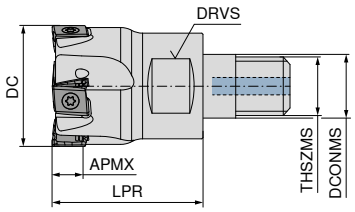

NEW

50 355 ...

Designation	DC mm	ZNF	APMX mm	LPR mm	DCONMS mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
GTANG.25.R.03-09-M12	25	3	8	35	12,5	M12	17	39600	2,2	LN.U 0904	363,00	**02503**
GTANG.25.R.04-09-M12	25	4	8	35	12,5	M12	17	39600	2,2	LN.U 0904	406,00	**02504**
GTANG.32.R.04-09-M16	32	4	8	40	17,0	M16	24	35000	2,2	LN.U 0904	437,00	**03204**
GTANG.32.R.05-09-M16	32	5	8	40	17,0	M16	24	35000	2,2	LN.U 0904	490,00	**03205**

MaxiMill – Tangent-09 end mill



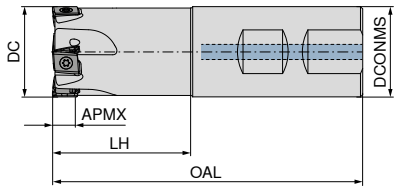

NEW

50 354 ...

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS h6 mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
CTANG.25.R.03-09-B-43-100	25	3	8	100	43	25	39600	2,2	LN.U 0904	363,00	**02503**
CTANG.25.R.04-09-B-43-100	25	4	8	100	43	25	39600	2,2	LN.U 0904	406,00	**02504**
CTANG.32.R.04-09-B-49-110	32	4	8	110	49	32	35000	2,2	LN.U 0904	437,00	**03204**
CTANG.32.R.05-09-B-49-110	32	5	8	110	49	32	35000	2,2	LN.U 0904	490,00	**03205**
CTANG.40.R.04-09-B32-49-110	40	4	8	110	49	32	31300	2,2	LN.U 0904	454,00	**04004**
CTANG.40.R.06-09-B32-49-110	40	6	8	110	49	32	31300	2,2	LN.U 0904	574,00	**04006**

MaxiMill – Tangent-09 face mill







										NEW		NEW		
										50 353 ...		**50 353 ...**		
Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	**EUR** 2B/40		**EUR** 2B/40	
ATANG.40.R.04-09-A16	40	4	8	40	38	16	31300	2,2	LN.U 0904			454,00	**04004**
ATANG.40.R.06-09-A16	40	6	8	40	38	16	31300	2,2	LN.U 0904	574,00	**04006**		
ATANG.50.R.05-09-A22	50	5	8	40	43	22	28000	2,2	LN.U 0904			500,00	**05005**
ATANG.50.R.07-09-A22	50	7	8	40	43	22	28000	2,2	LN.U 0904	620,00	**05007**		
ATANG.63.R.07-09-A22	63	7	8	40	48	22	25000	2,2	LN.U 0904			591,00	**06307**
ATANG.63.R.10-09-A22	63	10	8	40	48	22	25000	2,2	LN.U 0904	791,00	**06310**		
ATANG.80.R.08-09-A27	80	8	8	50	58	27	21000	2,2	LN.U 0904			682,00	**08008**
ATANG.80.R.11-09-A27	80	11	8	50	58	27	21000	2,2	LN.U 0904	977,00	**08011**		

Key D

Molykote

Clamping screw

Torque screwdriver

	80 950 ...		**70 950 ...**		**70 950 ...**		**80 950 ...**	
Spare parts	**EUR**		**EUR**		**EUR**		**EUR**	
Insert	Y7		2A/28		2A/28		Y7	
LN.U 0904	11,50	**119**	5,64	**303**	3,97	**710**	170,10	**193**

LNHU

Designation	D1 mm	L mm	BS mm	S mm	W1 mm
LNHU 0904..	3,45	9,3	1	4,8	8



LNHU

		NEW	NEW	NEW	NEW	NEW	NEW	NEW
		-M50 CTCP230	-M50 CTPP235	-M50 CTPM240	-M50 CTCM245	-M50 CTCK215	-M50 CTPK220	-F40 CTC5240
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		LNHU	LNHU	LNHU	LNHU	LNHU	LNHU	LNHU
		51 257 ...	51 257 ...	51 257 ...	51 257 ...	51 257 ...	51 257 ...	51 258 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1H/17
090404	0,4	21,80 **00400**	21,80 **10400**	21,80 **40400**	27,70 **40401**	21,80 **50400**	21,80 **60400**	27,70 **10401**
P		●	●	○	●			
M			○	●	●			
K		○	○			●	●	
N								
S					○			●
H								
O								

MaxiMill – Tangent-13 screw-in cutter



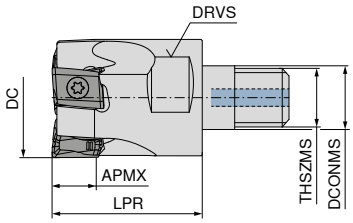

NEW

50 352 ...

Designation	DC mm	ZNF	APMX mm	LPR mm	DCONMS mm	THSZMS	DRVS mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
GTANG.32.R.03-13-M16	32	3	12	35	17	M16	24	25000	5,0	LN.U 1306	246,00	**03203**
GTANG.40.R.04-13-M16	40	4	12	40	17	M16	27	22500	5,0	LN.U 1306	454,00	**04004**

MaxiMill – Tangent-13 end mill



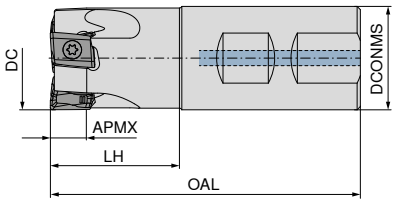

NEW

50 351 ...

Designation	DC mm	ZNF	APMX mm	OAL mm	LH mm	DCONMS $_{h6}$ mm	RPMX 1/min.	torque moment Nm	Insert	EUR 2B/40	
CTANG.32.R.03-13-B32-40	32	3	12	96	40	32	25000	5,0	LN.U 1306	246,00	**03203**
CTANG.40.R.04-13-B32-50	40	4	12	110	50	32	22500	5,0	LN.U 1306	454,00	**04004**

MaxiMill – Tangent-13 face mill





NEW NEW

Designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS $_{H6}$ mm	RPMX 1/min.	torque moment Nm	Insert	50 350 ... EUR 2B/40		50 350 ... EUR 2B/40	
ATANG.40.R.04-13-A16	40	4	12	40	38	16	22500	5,0	LN.U 1306			454,00	**04004**
ATANG.40.R.05-13-A16	40	5	12	40	38	16	22500	5,0	LN.U 1306	534,00	**04005**		
ATANG.40.R.05-13-A22	40	5	12	40	38	22	22500	5,0	LN.U 1306	534,00	**14005**		
ATANG.50.R.05-13-A22	50	5	12	40	43	22	20200	5,0	LN.U 1306			500,00	**05005**
ATANG.50.R.06-13-A22	50	6	12	40	43	22	20200	5,0	LN.U 1306	581,00	**05006**		
ATANG.50.R.06-13-A27	50	6	12	45	48	27	20200	5,0	LN.U 1306	581,00	**15006**		
ATANG.63.R.06-13-A22	63	6	12	40	48	22	18000	5,0	LN.U 1306			591,00	**06306**
ATANG.63.R.08-13-A22	63	8	12	40	48	22	18000	5,0	LN.U 1306	709,00	**06308**		
ATANG.63.R.08-13-A27	63	8	12	45	48	27	18000	5,0	LN.U 1306	709,00	**16308**		
ATANG.80.R.07-13-A27	80	7	12	50	58	27	15900	5,0	LN.U 1306			682,00	**08007**
ATANG.80.R.10-13-A27	80	10	12	50	58	27	15900	5,0	LN.U 1306	916,00	**08010**		
ATANG.100.R.09-13-A32	100	9	12	50	78	32	14200	5,0	LN.U 1306			866,00	**10009**
ATANG.100.R.13-13-A32	100	13	12	50	78	32	14200	5,0	LN.U 1306	1.110,00	**10013**		
ATANG.125.R.11-13-A40	125	11	12	63	88	40	12700	5,0	LN.U 1306			968,00	**12511**
ATANG.125.R.16-13-A40	125	16	12	63	88	40	12700	5,0	LN.U 1306	1.350,00	**12516**		

TORX® blade

Key D

Molykote

Clamping screw

Torque screwdriver

Spare parts	80 950 ... EUR Y7		80 950 ... EUR Y7		70 950 ... EUR 2A/28		70 950 ... EUR 2A/28		80 950 ... EUR Y7	
Insert										
LN.U 1306	6,78	**054**	11,79	**120**	5,64	**303**	4,46	**134**	170,10	**193**

LNHU

Designation	D1 mm	L mm	BS mm	S mm	W1 mm
LNHU 1306..	4,5	13,3	1,5	7,0	10,2



LNHU

		NEW	NEW	NEW	NEW	NEW	NEW	NEW
		-M50 CTCP230	-M50 CTPP235	-F50 CTPM240	-F50 CTCM245	-M50 CTCK215	-M50 CTPK220	-F50 CTC5240
		DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		LNHU	LNHU	LNHU	LNHU	LNHU	LNHU	LNHU
		51 255 ...	51 255 ...	51 256 ...	51 256 ...	51 255 ...	51 255 ...	51 256 ...
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1H/17	EUR 1B/61	EUR 1B/61	EUR 1H/17
130608	0,8	26,60 **00800**	26,60 **10800**	26,60 **40800**	33,20 **40801**	26,60 **50800**	26,60 **60800**	33,20 **10801**
P		●	●	○	●			
M			○	●	●			
K		○	○			●	●	
N								
S					○			●
H								
O								

MaxiMill – Slot-SNHX screw-in multipurpose milling cutter







NEW

Designation	DC mm	CW mm	CDX mm	LPR mm	DCONMS mm	THSZMS	DRVS mm	ZNF	Insert	50 373 ... EUR 2B/40	
GSLOT.50.R.04-SN13-06-DC-M12	50	6	13	35	12,5	M12	17	4	SNHX 1303..	455,00	**05006**
GSLOT.63.R.06-SN13-06-DC-M12	63	6	18	35	12,5	M12	17	6	SNHX 1303..	604,00	**06306**
GSLOT.80.R.08-SN13-06-DC-M16	80	6	21	35	17,0	M16	24	8	SNHX 1303..	755,00	**08006**
GSLOT.50.R.04-SN13-08-DC-M12	50	8	13	35	12,5	M12	17	4	SNHX 1304..	455,00	**05008**
GSLOT.63.R.06-SN13-08-DC-M12	63	8	18	35	12,5	M12	17	6	SNHX 1304..	604,00	**06308**
GSLOT.80.R.08-SN13-08-DC-M16	80	8	21	35	17,0	M16	24	8	SNHX 1304..	755,00	**08008**

Clamping screw

Spare parts for Article no.	50 950 ... EUR 2A/28	
50 373 05006 / 50 373 06306	6,40	**00500**
50 373 05008 / 50 373 06308	6,40	**00600**
50 373 08006	6,40	**00500**
50 373 08008	6,40	**00600**

MaxiMill – Slot-SNHX cylindrical shank saw







NEW

Designation	DC mm	CW mm	CDX mm	OAL mm	LH mm	DCONMS mm	ZNF	Insert	50 372 ... EUR 2B/40	
CSLOT.50.R.04-SN13-06-DC-B20-42	50	6	13	95	42	20	4	SNHX 1303..	460,00	**05006**
CSLOT.63.R.06-SN13-06-DC-B25-41	63	6	18	100	41	25	6	SNHX 1303..	615,00	**06306**
CSLOT.80.R.08-SN13-06-DC-B32-48	80	6	22	110	48	32	8	SNHX 1303..	770,00	**08006**
CSLOT.100.R.10-SN13-06-DC-B40-52	100	6	29	125	52	40	10	SNHX 1303..	920,00	**10006**
CSLOT.50.R.04-SN13-08-DC-B20-42	50	8	13	95	42	20	4	SNHX 1304..	460,00	**05008**
CSLOT.63.R.06-SN13-08-DC-B25-41	63	8	18	100	41	25	6	SNHX 1304..	615,00	**06308**
CSLOT.80.R.08-SN13-08-DC-B32-48	80	8	22	110	48	32	8	SNHX 1304..	770,00	**08008**
CSLOT.100.R.10-SN13-08-DC-B40-52	100	8	29	125	52	40	10	SNHX 1304..	920,00	**10008**
CSLOT.50.R.04-SN13-10-DC-B20-42	50	10	13	95	42	20	4	SNHX 1305..	460,00	**05010**
CSLOT.63.R.06-SN13-10-DC-B25-41	63	10	18	100	41	25	6	SNHX 1305..	615,00	**06310**
CSLOT.80.R.08-SN13-10-DC-B32-48	80	10	22	110	48	32	8	SNHX 1305..	770,00	**08010**
CSLOT.100.R.10-SN13-10-DC-B40-52	100	10	29	125	52	40	10	SNHX 1305..	920,00	**10010**
CSLOT.50.R.04-SN13-12-DC-B20-42	50	12	13	95	42	20	4	SNHX 1307..	460,00	**05012**
CSLOT.63.R.06-SN13-12-DC-B25-41	63	12	18	100	41	25	6	SNHX 1307..	615,00	**06312**
CSLOT.80.R.08-SN13-12-DC-B32-48	80	12	22	110	48	32	8	SNHX 1307..	770,00	**08012**
CSLOT.100.R.10-SN13-12-DC-B40-52	100	12	29	125	52	40	10	SNHX 1307..	920,00	**10012**

Clamping screw

Spare parts for Article no.	50 950 ... EUR 2A/28	
50 372 05006 / 50 372 06306	6,40	**00500**
50 372 05008 / 50 372 06308	6,40	**00600**
50 372 05010 / 50 372 06310	6,40	**00700**
50 372 05012 / 50 372 06312	6,40	**00800**
50 372 08006 / 50 372 10006	6,40	**00500**
50 372 08008 / 50 372 10008	6,40	**00600**
50 372 08010 / 50 372 10010	6,40	**00700**
50 372 08012 / 50 372 10012	6,40	**00800**

MaxiMill – Slot-SNHX slot milling and parting off cutter

Direct Cooling

κ = 90°





NEW

Designation	DC mm	CW mm	CDX mm	OAL mm	DCONMS mm	DHUB mm	ZNF	Insert	50 374 ... EUR 2B/40	
ASLOT.80.R.08-SN13-06-DC-A22	80	6	22,0	50	22	40	8	SNHX 1303..	755,00	08006
ASLOT.100.R.10-SN13-06-DC-A27	100	6	25,0	50	27	48	10	SNHX 1303..	901,00	10006
ASLOT.125.R.12-SN13-06-DC-A32	125	6	31,5	50	32	58	12	SNHX 1303..	1.060,00	12506
ASLOT.160.R.16-SN13-06-DC-A40	160	6	41,5	50	40	70	16	SNHX 1303..	1.209,00	16006
ASLOT.200.R.18-SN13-06-DC-A40	200	6	52,0	50	40	88	18	SNHX 1303..	1.360,00	20006
ASLOT.80.R.08-SN13-08-DC-A22	80	8	22,0	50	22	40	8	SNHX 1304..	755,00	08008
ASLOT.100.R.10-SN13-08-DC-A27	100	8	25,0	50	27	48	10	SNHX 1304..	901,00	10008
ASLOT.125.R.12-SN13-08-DC-A32	125	8	31,5	50	32	58	12	SNHX 1304..	1.060,00	12508
ASLOT.160.R.16-SN13-08-DC-A40	160	8	41,5	50	40	70	16	SNHX 1304..	1.209,00	16008
ASLOT.200.R.18-SN13-08-DC-A40	200	8	52,0	50	40	88	18	SNHX 1304..	1.360,00	20008
ASLOT.80.R.08-SN13-10-DC-A22	80	10	22,0	50	22	40	8	SNHX 1305..	755,00	08010
ASLOT.100.R.10-SN13-10-DC-A27	100	10	25,0	50	27	48	10	SNHX 1305..	901,00	10010
ASLOT.125.R.12-SN13-10-DC-A32	125	10	31,5	50	32	58	12	SNHX 1305..	1.060,00	12510
ASLOT.160.R.16-SN13-10-DC-A40	160	10	41,5	50	40	70	16	SNHX 1305..	1.209,00	16010
ASLOT.200.R.18-SN13-10-DC-A40	200	10	52,0	50	40	88	18	SNHX 1305..	1.360,00	20010
ASLOT.80.R.08-SN13-12-DC-A22	80	12	22,0	50	22	40	8	SNHX 1307..	755,00	08012
ASLOT.100.R.10-SN13-12-DC-A27	100	12	25,0	50	27	48	10	SNHX 1307..	901,00	10012
ASLOT.125.R.12-SN13-12-DC-A32	125	12	31,5	50	32	58	12	SNHX 1307..	1.060,00	12512
ASLOT.160.R.16-SN13-12-DC-A40	160	12	41,5	50	40	70	16	SNHX 1307..	1.209,00	16012
ASLOT.200.R.18-SN13-12-DC-A40	200	12	52,0	50	40	88	18	SNHX 1307..	1.360,00	20012
ASLOT.80.R.08-SN13-14-DC-A22	80	14	22,0	50	22	40	8	SNHX 1309..	755,00	08014
ASLOT.100.R.10-SN13-14-DC-A27	100	14	25,0	50	27	48	10	SNHX 1309..	901,00	10014
ASLOT.125.R.12-SN13-14-DC-A32	125	14	31,5	50	32	58	12	SNHX 1309..	1.060,00	12514
ASLOT.160.R.16-SN13-14-DC-A40	160	14	41,5	50	40	70	16	SNHX 1309..	1.209,00	16014
ASLOT.200.R.18-SN13-14-DC-A40	200	14	52,0	50	40	88	18	SNHX 1309..	1.360,00	20014
ASLOT.80.R.08-SN13-16-DC-A22	80	16	22,0	50	22	40	8	SNHX 1309..	755,00	08016
ASLOT.100.R.10-SN13-16-DC-A27	100	16	25,0	50	27	48	10	SNHX 1309..	901,00	10016
ASLOT.125.R.12-SN13-16-DC-A32	125	16	31,5	50	32	58	12	SNHX 1309..	1.060,00	12516
ASLOT.160.R.16-SN13-16-DC-A40	160	16	41,5	50	40	70	16	SNHX 1309..	1.209,00	16016
ASLOT.200.R.18-SN13-16-DC-A40	200	16	52,0	50	40	88	18	SNHX 1309..	1.360,00	20016

Clamping screw

Clamping screw

Spare parts for Article no.	50 950 ... EUR 2A/28		50 950 ... EUR 2A/28	
50 374 08006	3,30	01000	6,40	00500
50 374 08008	3,30	01000	6,40	00600
50 374 08010	3,30	01000	6,40	00700
50 374 08012	3,30	01000	6,40	00800
50 374 08014 / 50 374 08016	3,30	01000	6,40	00900
50 374 10006	6,40	01100	6,40	00500
50 374 10008	6,40	01100	6,40	00600
50 374 10010	6,40	01100	6,40	00700
50 374 10012	6,40	01100	6,40	00800
50 374 10014 / 50 374 10016	6,40	01100	6,40	00900
50 374 12506	7,90	01200	6,40	00500
50 374 12508	7,90	01200	6,40	00600
50 374 12510	7,90	01200	6,40	00700
50 374 12512	7,90	01200	6,40	00800
50 374 12514 / 50 374 12516	7,90	01200	6,40	00900
50 374 16006 / 50 374 20006	7,50	01300	6,40	00500
50 374 16008 / 50 374 20008	7,50	01300	6,40	00600
50 374 16010 / 50 374 20010	7,50	01300	6,40	00700
50 374 16012 / 50 374 20012	7,50	01300	6,40	00800
50 374 16014 / 50 374 16016	7,50	01300	6,40	00900
50 374 20014 / 50 374 20016	7,50	01300	6,40	00900

SNHX

Designation	IC mm	D1 mm	L mm	S mm
SNHX 1303..	13	5,3	13	3,2
SNHX 1304..	13	5,3	13	4,5
SNHX 1305..	13	5,3	13	5,4
SNHX 1307..	13	5,3	13	7,0
SNHX 1309..	13	5,3	13	9,0



SNHX

NEW

CTPP235

SNHX

51 263 ...

SNHX

51 264 ...

SNHX

51 265 ...

SNHX

51 266 ...

SNHX

51 267 ...

ISO	RE mm	EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61		EUR 1B/61	
130308EL	0,8	18,30	**10800**								
130308ER	0,8	18,30	**11800**								
130408EL	0,8			18,90	**10800**						
130408ER	0,8			18,90	**11800**						
130508EL	0,8					19,30	**10800**				
130508ER	0,8					19,30	**11800**				
130708EL	0,8							20,40	**10800**		
130708ER	0,8							20,40	**11800**		
130908EL	0,8									20,90	**10800**
130908ER	0,8									20,90	**11800**
P		●		●		●		●		●	
M		○		○		○		○		○	
K		○		○		○		○		○	
N											
S											
H											
O											

SNHX

		NEW	NEW	NEW	NEW	NEW
		CTPM240	CTPM240	CTPM240	CTPM240	CTPM240
		SNHX	SNHX	SNHX	SNHX	SNHX
		51 263 ...	**51 264 ...**	**51 265 ...**	**51 266 ...**	**51 267 ...**
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
130308EL	0,8	18,30 **40800**				
130308ER	0,8	18,30 **41800**				
130408EL	0,8		18,90 **40800**			
130408ER	0,8		18,90 **41800**			
130508EL	0,8			19,30 **40800**		
130508ER	0,8			19,30 **41800**		
130708EL	0,8				20,40 **40800**	
130708ER	0,8				20,40 **41800**	
130908EL	0,8					20,90 **40800**
130908ER	0,8					20,90 **41800**
P		○	○	○	○	○
M		●	●	●	●	●
K						
N						
S						
H						
O						

SNHX

		NEW	NEW	NEW	NEW	NEW
		CTPK220	CTPK220	CTPK220	CTPK220	CTPK220
		SNHX	SNHX	SNHX	SNHX	SNHX
		51 263 ...	**51 264 ...**	**51 265 ...**	**51 266 ...**	**51 267 ...**
ISO	RE mm	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61	EUR 1B/61
130308EL	0,8	18,30 **60800**				
130308ER	0,8	18,30 **61800**				
130408EL	0,8		18,90 **60800**			
130408ER	0,8		18,90 **61800**			
130508EL	0,8			19,30 **60800**		
130508ER	0,8			19,30 **61800**		
130708EL	0,8				20,40 **60800**	
130708ER	0,8				20,40 **61800**	
130908EL	0,8					20,90 **60800**
130908ER	0,8					20,90 **61800**
P						
M						
K		●	●	●	●	●
N						
S						
H						
O						

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values for MaxiMill – Slot-SNHX

Index	CTPP235		CTPM240		CTPK220	
	DRAGONSKIN					
	Cutting Material **hard** (v_c↑) → **tough** (v_c↓)					
	v_c (m/min)					
P.1.1	**246**	**137**	226	141		
P.1.2	**208**	**121**	188	126		
P.1.3	**172**	**106**	152	112		
P.1.4	**160**	**101**	140	107		
P.1.5	**143**	**94**	123	100		
P.2.1	**214**	**123**	194	128		
P.2.2	**157**	**100**	137	106		
P.2.3	**143**	**94**	123	100		
P.2.4	**98**	**76**	78	83		
P.3.1	**121**	**97**	126	105		
P.3.2	**108**	**83**	112	95		
P.3.3	**96**	**69**	98	85		
P.4.1	**121**	**97**	126	105		
P.4.2	**114**	**90**	119	100		
M.1.1	121	97	**126**	**105**		
M.2.1	108	83	**112**	**95**		
M.3.1	117	93	**121**	**102**		
K.1.1	160	110			**320**	**190**
K.1.2	150	110			**170**	**100**
K.2.1	150	110			**210**	**130**
K.2.2	150	110			**140**	**90**
K.3.1					**200**	**120**
K.3.2					**170**	**100**
N.1.1						
N.1.2						
N.2.1						
N.2.2						
N.2.3						
N.3.1						
N.3.2						
N.3.3						
N.4.1						
S.1.1						
S.1.2						
S.2.1						
S.2.2						
S.2.3						
S.3.1						
S.3.2						
S.3.3						
H.1.1						
H.1.2						
H.1.3						
H.1.4						
H.2.1						
H.3.1						
O.1.1						
O.1.2						
O.2.1						
O.2.2						
O.3.1						

average chip thickness

h_m in mm

$$h_m = \frac{f_z}{2} \sqrt{\frac{a_e}{DC}}$$

Feed per tooth

f_z in mm

$$f_z = h_m \sqrt{\frac{DC}{a_e}}$$

Feed rate

v_f in mm/min

$$v_f = f_z \times ZNF \times n$$

DC = Ø of the disc cutters

ZNF = Number of teeth of the cutter

Reference tool 50 374 12506 – ASLOT.125.R.12-SN13-06-DC-A32

	a_e	10	20	30
	h_m	f_z in mm		
P	**0,11**	0,39	0,28	0,22
M	**0,08**	0,28	0,20	0,16
K	**0,13**	0,46	0,33	0,27
N				
S				
H				
O				

ASLOT.125.R.12-SN13-06-DC-A32

Tool tooth count (Z)	**12**
Effective tooth count (Z/2)	**6**

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

Cutting data standard values

Index	CTCP230		CTPP235		CTPM240		CTPM245		CTCM245		CTCK215		CTC5240		CTCS245	
	DRAGONSKIN															
	Cutting Material **hard** (v_c↑) → **tough** (v_c↓)															
	v_c (m/min)															
P.1.1	**286**	**150**	**246**	**137**	226	141	244	139	279	134						
P.1.2	**242**	**133**	**208**	**121**	188	126	207	124	242	119						
P.1.3	**202**	**118**	**172**	**106**	152	112	173	109	208	104						
P.1.4	**189**	**112**	**160**	**101**	140	107	161	104	196	99						
P.1.5	**169**	**105**	**143**	**94**	123	100	144	97	179	92						
P.2.1	**249**	**136**	**214**	**123**	194	128	212	126	247	121						
P.2.2	**185**	**111**	**157**	**100**	137	106	158	103	193	98						
P.2.3	**169**	**105**	**143**	**94**	123	100	144	97	179	92						
P.2.4	**118**	**85**	**98**	**76**	78	83	101	78	136	73						
P.3.1	**140**	**87**	**121**	**97**	126	105	155	107	175	122						
P.3.2	**90**	**55**	**108**	**83**	112	95	143	93	163	108						
P.3.3	**40**	**22**	**96**	**69**	98	85	131	79	151	94						
P.4.1	**140**	**87**	**121**	**97**	126	105	155	107	175	122						
P.4.2	**115**	**71**	**114**	**90**	119	100	149	100	169	115						
M.1.1			121	97	**126**	**105**	**155**	**107**	**175**	**122**						
M.2.1			108	83	**112**	**95**	**143**	**93**	**163**	**108**						
M.3.1			117	93	**121**	**102**	**152**	**103**	**172**	**118**						
K.1.1	310	190	160	110							**360**	**210**				
K.1.2	160	100	150	110							**220**	**130**				
K.2.1	200	120	150	110							**230**	**140**				
K.2.2	130	80	150	110							**160**	**100**				
K.3.1	190	115									**250**	**150**				
K.3.2	160	100									**210**	**130**				
N.1.1																
N.1.2																
N.2.1																
N.2.2																
N.2.3																
N.3.1																
N.3.2																
N.3.3																
N.4.1																
S.1.1										80				**80**		**64**
S.1.2										70				**70**		**56**
S.2.1										35				**35**		**28**
S.2.2										25				**25**		**20**
S.2.3										30				**30**		**24**
S.3.1										80				**80**		**64**
S.3.2										50				**50**		**40**
S.3.3										40				**40**		**32**
H.1.1																
H.1.2																
H.1.3																
H.1.4																
H.2.1																
H.3.1																
O.1.1																
O.1.2																
O.2.1																
O.2.2																
O.3.1																

The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. **±20%** according to the usage conditions.

MaxiMill HFCD-06 system

Machining strategy

Programmed radius r3D = 2.0 mm





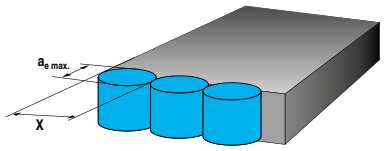

Cutting depth and remaining material			Cutting width for flat surfaces			Cutting depth when plunging				
IC in mm	RE in mm	$a_{p\ max.}$ in mm	DCX in mm	X in mm	B in mm	$a_{e\ max.}$ in mm	f_z in mm			X
							initial	min.	max.	
6,05	1,8	0,8	16–66	DCX–(2 x B)	4,3	5,3	0,10	0,08	0,15	<0,7 x DCX

	circular		
	Helical plunging (helical plunging into solid material)		
DCX mm	$D_{min.}$ mm	$D_{max.}$ mm	$\alpha_{R\ max.}$ °
16	29	31	1,2°
20	36	39	1°
25	45	49	0,9°
32	59	63	0,65°
35	64	69	0,6°
40	74	79	0,5°
42	78	83	0,45°
50	94	99	0,35°
52	98	103	0,35°
63	120	125	0,3°
66	126	131	0,25°

	axial	Angled
	Plunging	
DCX mm	$X_{max.}$ mm	$\alpha_{R\ max.}$ °
16	0,2	1,5°
20		1,4°
25	0,25	1,1°
32		0,9°
35		0,7°
40		0,65°
42		0,6°
50		0,5°
52		0,45°
63		0,4°
66		0,35°

Starting Parameter

XNEU 06

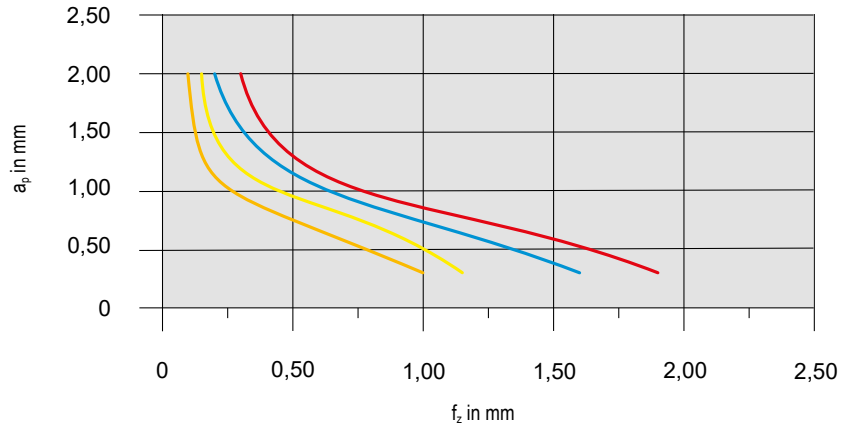

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**XNEU 06T318SR-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**XNEU 06T318SR-F50**	**CTPM240**	180	Dry
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**XNEU 06T318SR-R50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**XNEU 06T318ER-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 49+50

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill – Tangent-09

Machining strategy

LNHU 09 – DC/a_e Ratio (Dry machining at $a_{p\ max.}$)

DC	ZNF	5 %	10 %	15 %	20 %	25 %	30 %	35 %	40 %	45 %	50 %	55 %	60 %	65 %	70 %	75 %	80 %	85 %	90 %	95 %	100 %
25	3	P																			
		M																			
		K																			
	4	P																			
		M																			
		K																			
32	4	P																			
		M																			
		K																			
	5	P																			
		M																			
		K																			
40	4	P																			
		M																			
		K																			
	6	P																			
		M																			
		K																			
50	5	P																			
		M																			
		K																			
	7	P																			
		M																			
		K																			
63	7	P																			
		M																			
		K																			
	10	P																			
		M																			
		K																			
80	8	P																			
		M																			
		K																			
	11	P																			
		M																			
		K																			

Starting Parameter

LNHU 09

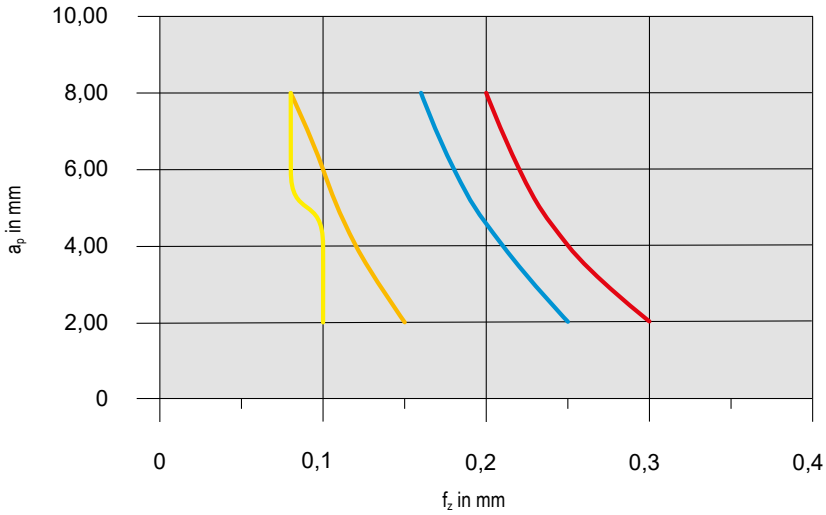

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**LNHU 090404-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**LNHU 090404-M50**	**CTPM240**	120	Emulsion
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**LNHU 090404-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**LNHU 090404-F40**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 49+50

From v_c > 400 m/min, the tool must be balanced!

System MaxiMill – Tangent-13

Machining strategy

LNHU 13 – DC/a_e Ratio (Dry machining at $a_{p\ max.}$)

DC	ZNF	5 %	10 %	15 %	20 %	25 %	30 %	35 %	40 %	45 %	50 %	55 %	60 %	65 %	70 %	75 %	80 %	85 %	90 %	95 %	100 %
32	3	P																			
		M																			
		K																			
40	4	P																			
		M																			
		K																			
	5	P																			
		M																			
		K																			
50	5	P																			
		M																			
		K																			
	6	P																			
		M																			
		K																			
63	6	P																			
		M																			
		K																			
	8	P																			
		M																			
		K																			
80	7	P																			
		M																			
		K																			
	10	P																			
		M																			
		K																			
100	9	P																			
		M																			
		K																			
	13	P																			
		M																			
		K																			
125	11	P																			
		M																			
		K																			
	16	P																			
		M																			
		K																			

Starting Parameter

LNHU 13

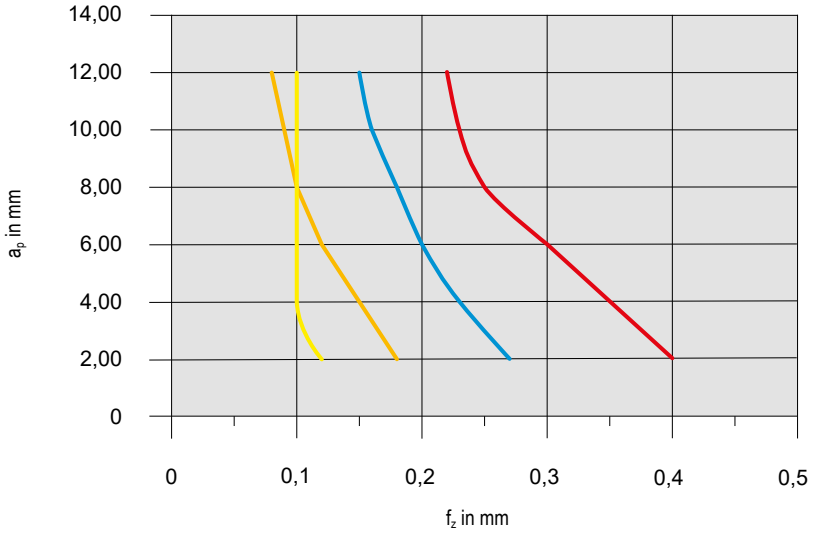

Material			Inserts		v_c in m/min	Cooling
Steel	**P.2.2**	40CrMnMoS 8-6	**LNHU 130608-M50**	**CTPP235**	200	Dry
Stainless steel	**M.1.1**	X6CrNiMoTi 1712 2	**LNHU 130608-F50**	**CTPM240**	120	Emulsion
Cast iron	**K.1.1**	EN-GJL-250 (GG25)	**LNHU 130608-M50**	**CTCK215**	250	Dry
Heat-resistant	**S.2.2**	Inconel 718	**LNHU 130608-F50**	**CTC5240**	35	Emulsion

Detailed information on cutting speed for each grade can be found on → page 49+50

From v_c > 400 m/min, the tool must be balanced!

Actively vibration-damped shell mill adapter

- ▲ The specially mounted damping core enables perfect machining results even with longer tool overhangs
- ▲ Reduction in machining times due to optimum machining parameters
- ▲ Damped machining and therefore perfect surface qualities
- ▲ Protection of the machine spindle and increased tool service life
- ▲ Screwed drive dogs
- ▲ Also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

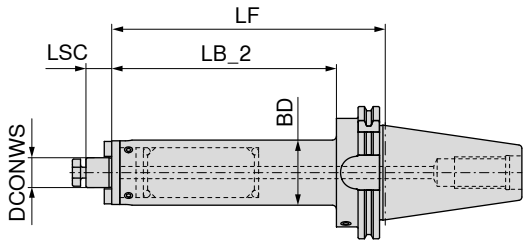

NEW

AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	84 752 ... EUR Y8/3K	
SK 40	16	180,9	200	39	17	3.470,00	**51679**
SK 40	22	180,9	200	48	19	4.170,00	**52279**
SK 50	16	180,9	200	39	17	3.505,00	**51678**
SK 50	22	180,9	200	48	19	4.669,00	**52278**
SK 50	27	180,9	200	58	21	4.688,00	**52778**

Screw for drivers

Driver

Cross screw

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B			83 367 ... EUR Y8			83 950 ... EUR Y8/3B	
16	M3x8	0,48	**296**	8x9x17,5	9,32	**120**	M8	4,17	**016**	M8x25	3,72	**113**
22	M4x12	0,61	**297**	10x11x20,5	9,65	**121**	M10	4,58	**022**	M10x25	4,28	**124**
27	M5x12	0,74	**136**	12x13x24,3	10,93	**122**	M12	5,85	**027**	M12x30	4,73	**125**

Accessories

→ 58, 60
Pull stud

→ 284
Others

Accessories can be found in the clamping technology catalogue
→ **Chapter 16, Adapters and accessories**

Actively vibration-damped shell mill adapter

- ▲ The specially mounted damping core enables perfect machining results even with longer tool overhangs
- ▲ Reduction in machining times due to optimum machining parameters
- ▲ Damped machining and therefore perfect surface qualities
- ▲ Protection of the machine spindle and increased tool service life
- ▲ Screwed drive dogs
- ▲ Also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

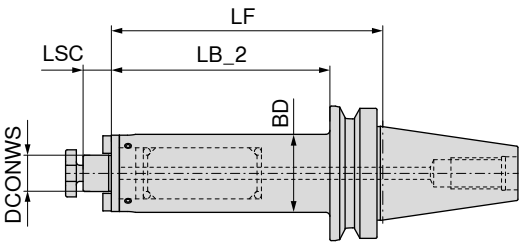

NEW

AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	84 752 ... EUR Y8/3K	
BT 40	16	173,0	200	39	17	3.467,00	**51669**
BT 40	22	173,0	200	48	19	4.167,00	**52269**
BT 50	16	162,5	200	39	17	3.505,00	**51668**
BT 50	22	162,0	200	48	19	4.669,00	**52268**
BT 50	27	162,0	200	58	21	4.688,00	**52768**

Screw for drivers

Driver

Cross screw

clamping screw

Spare parts DCONWS		83 950 ... EUR Y8/3B			83 950 ... EUR Y8/3B			83 367 ... EUR Y8			83 950 ... EUR Y8/3B	
16	M3x8	0,48	**296**	8x9x17,5	9,32	**120**	M8	4,17	**016**	M8x25	3,72	**113**
22	M4x12	0,61	**297**	10x11x20,5	9,65	**121**	M10	4,58	**022**	M10x25	4,28	**124**
27	M5x12	0,74	**136**	12x13x24,3	10,93	**122**	M12	5,85	**027**	M12x30	4,73	**125**

Accessories

→ 110+111
Pull stud

→ 284
Others

Accessories can be found in the clamping technology catalogue
→ **Chapter 16, Adapters and accessories**

Actively vibration-damped shell mill adapter

- ▲ The specially mounted damping core enables perfect machining results even with longer tool overhangs
- ▲ Reduction in machining times due to optimum machining parameters
- ▲ Damped machining and therefore perfect surface qualities
- ▲ Protection of the machine spindle and increased tool service life
- ▲ Screwed drive dogs
- ▲ Also available with Balluff chip **on request**

Scope of supply:
Base body with retaining screw and drive dog

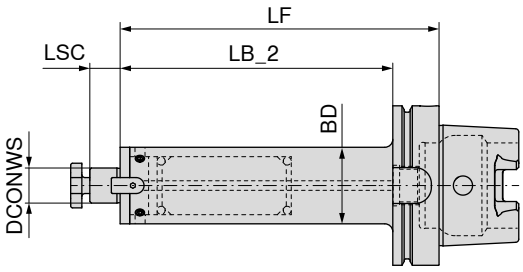

NEW

AD
G 2,5 n_{max} 25000

Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	84 752 ... EUR Y8/3K	
HSK-A 63	16	174	200	39	17	3.499,00	**51657**
HSK-A 63	22	174	200	48	19	4.201,00	**52257**
HSK-A 100	16	171	200	39	17	3.524,00	**51655**
HSK-A 100	22	171	200	48	19	4.688,00	**52255**
HSK-A 100	27	171	200	58	21	4.708,00	**52755**

Screw for drivers

Driver

Cross screw

clamping screw

Spare parts DCONWS	83 950 ... EUR Y8/3B		83 950 ... EUR Y8/3B		83 367 ... EUR Y8		83 950 ... EUR Y8/3B	
16	0,48	**296**	9,32	**120**	4,17	**016**	3,72	**113**
22	0,61	**297**	9,65	**121**	4,58	**022**	4,28	**124**
27	0,74	**136**	10,93	**122**	5,85	**027**	4,73	**125**

Accessories

→ 156
Pull stud

→ 284
Others

Accessories can be found in the clamping technology catalogue
→ **Chapter 16, Adapters and accessories**

Sustainability is not a goal, it's a mission.

We have an ambitious sustainability mission that will affect and change the entire supply chain. But we can only achieve true sustainability together. That's why our mission goes beyond our own scope:

We want to enable our customers to produce more sustainably with our products and services. With our ambitious mission, we want to make an important contribution to tackling the climate crisis.

Mission #1:
Climate neutral by 2025

Mission #2:
Minimise the use of virgin raw materials

connACT
Together for Sustainability

cutting.tools/ie/en/sustainability

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

MNG mini – Base plate, rectangular, 52 x 52 mm

▲ Order mounting bolts separately

MNG mini | **52 x 52**

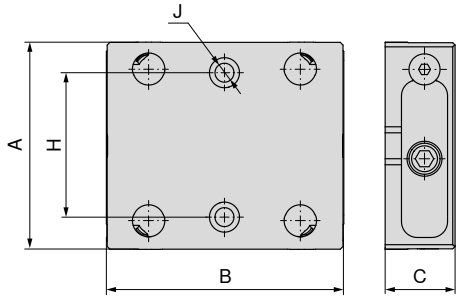

NEW

Size	A mm	B mm	C ±0,005 mm	H ±0,01 mm	J F7 mm	WT kg	80 915 ... EUR Y4
52 x 52	80	100	27	50	12	1,36	380,00 75200

MNG mini – Base plate, rectangular, 96 x 96 mm

▲ Order mounting bolts separately

MNG mini | **96 x 96**

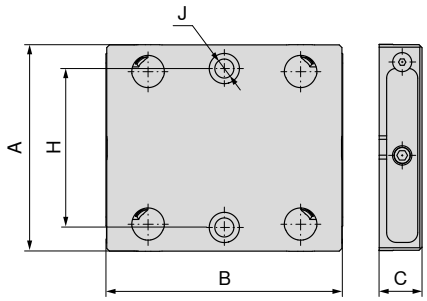

NEW

Size	A mm	B mm	C ±0,005 mm	H ±0,01 mm	J F7 mm	WT kg	80 915 ... EUR Y4
96 x 96	130	148	27	100	12	3,59	570,00 79600

MNG mini – combi-insert, 52 x 52 mm and 96 x 96 mm

▲ Order mounting bolts separately

MNG mini | **52 x 52** | **96 x 96**

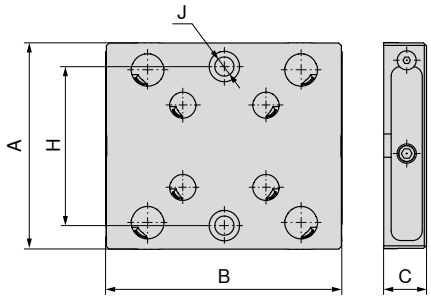

NEW

Size	A mm	B mm	C ±0,005 mm	H ±0,01 mm	J F7 mm	WT kg	80 915 ... EUR Y4	
52 x 52 / 96 x 96	130	148	27	100	12	3,43	665,00	**75900**

MNG mini – combi-5-axis-increase, 52 x 52 mm and 96 x 96 mm

▲ Order mounting bolts separately

MNG mini | **52 x 52** | **96 x 96**

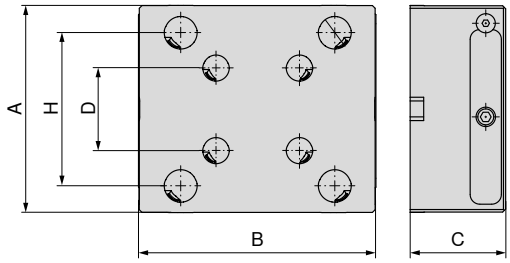

NEW

A mm	B mm	C mm	D mm	H mm	80 915 ... EUR Y4	
130	148	60	52	96	1.040,00	**56000**
130	148	100	52	96	1.140,00	**51000**

MNG mini underside dimensions

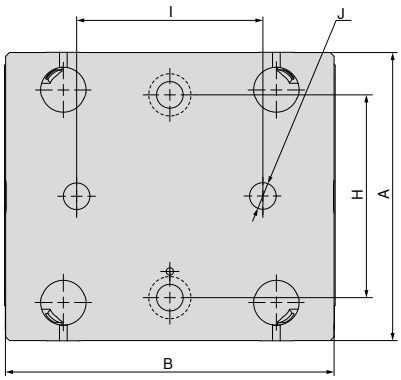

Base plate, rectangular, 52 x 52 mm

A mm	B mm	H mm	$I_{\pm 0,01}$ mm	J_{H7} mm
80	100	50	40	12

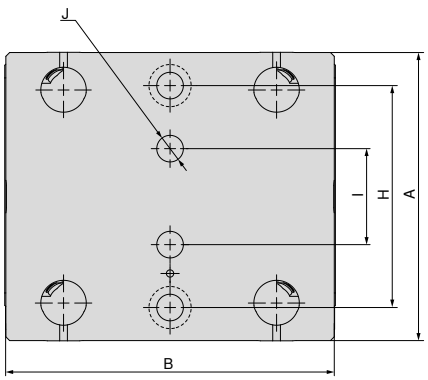

Base plate, rectangular, 96 x 96 mm

A mm	B mm	H mm	$I_{\pm 0,01}$ mm	J_{H7} mm
130	148	100	50	12

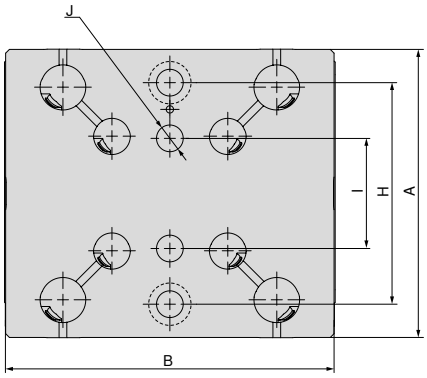

Combi-insert 1-sided, 52 x 52 mm and 96 x 96 mm

A mm	B mm	H mm	$I_{\pm 0,01}$ mm	J_{H7} mm
130	148	100	50	12

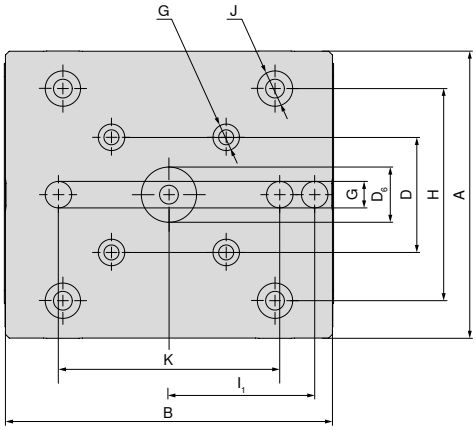

Combi-5-axis-increase, 52 x 52 mm and 96 x 96 mm

A mm	B mm	D mm	$D_{6\,H7}$ mm	G_{H7} mm	H mm	$I_{1\,\pm 0,01}$ mm	J_{H7} mm	K mm
130	148	52	25	12	96	66	16	100

MNG mini mounting bolt set

Scope of supply:
Set contains four mounting bolts

MNG mini | **96 x 96**



NEW

$D_{1\ h6}$ mm	$D_{2\ h6}$ mm	M mm	G mm	TQX Nm	Clamping force kN	for	80 915 ... EUR Y4	
20	16	22	M10	18	15	96 x 96	40,00	**51100**

Expansion aid

MNG mini

NEW

D_1 mm	M mm	80 915 ... EUR Y4	
15	40	45,00	**51300**

Clamping Screw Set for T-slot for MNG mini

Scope of supply:
Clamping screw and T-Nuts

MNG mini

NEW

for slot width mm	G	80 915 ... EUR Y4	
14	M12	29,00	**62400**
16	M12	29,00	**62600**
18	M12	29,00	**62800**

Mounting bolt set – LANG / HWR

Scope of supply:
Set contains four mounting bolts

MNG mini



NEW

TQX Nm	Clamping force kN	$D_{1\ h6}$ mm	$D_{2\ h6}$ mm	M mm	for	80 915 ... EUR Y4	
18	15	15	12	22	52 x 52	36,00	**51500**
18	15	19	16	22	96 x 96	40,00	**51400**

Alignment/centering set for T-slots

▲ A = groove spacing

Scope of supply:
1 Terminal block, 2 T-nuts, 2 screws, 2 washers for width 12 mm, without clamping strip!

MNG mini

NEW

for slot width mm	A mm	G	80 915 ... EUR Y4	
12	35	M10	90,70	**82200**
14	35	M10	90,70	**82400**
16	35	M10	90,70	**82600**
18	40	M10	90,70	**82800**

Workpiece supports overview – Verso

Workpiece supports, offset

▲ Price for 2 pieces





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X6G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	40		22							87,40	**80 914 70300**										●	

Workpiece supports, offset

▲ Price for 2 pieces





For vice width	A	A_1	D	D_1	D_2	E	M	M_1	M_2	EUR	NEW Y4	NCG	H5G / -S / -Z	X6G-Z / -S	ESG 4	ESG 5	HDG 2	ZSG 4	ZSG mini	DSG 4	Verso	HSG
90	90		22							87,40	**80 914 72500**										●	

MNG – base plate 4-sided with indexing, 330 x 400 mm

- ▲ MNG – Mechanical zero point clamping system
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on each clamping bolt
- ▲ 15 x M12 mounting holes for T-slot spacing 50, 63, 100, 125 mm
- ▲ 2 x locating holes Ø18 G7 for positioning
- ▲ 1 x locating hole Ø12 F7 for positioning

MNG

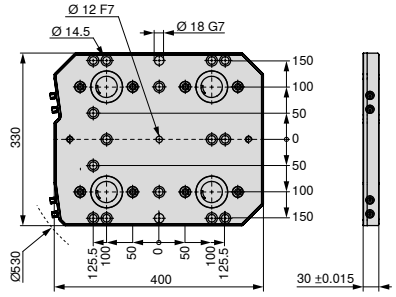

NEW

Size	WT kg	80 899 ... EUR Y4	
330x400 mm	28	3.290,00	**64200**[1)]

1) Not ex-stock

MNG – base plate 6-sided with indexing, 400 x 400 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ 14 x mounting holes for M16, for T-slot spacing 63, 80, 100, 125 mm
- ▲ 2 x mounting holes for M12
- ▲ 2 x mating holes Ø18 G7 for positioning
- ▲ 1 x mating holes Ø12 F7 for positioning

MNG

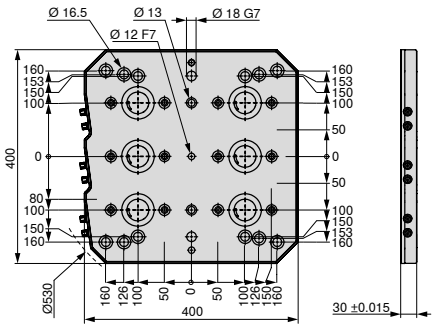

NEW

Size	WT kg	80 899 ... EUR Y4	
400x400 mm	33	4.510,00	**64300**[1)]

1) Not ex-stock

MNG – base plate 6-sided with indexing, 400 x 530 mm

- ▲ MNG – Mechanical zero point clamping system
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on each clamping bolt
- ▲ 24 x M12 mounting holes for T-slot spacing 63, 100, 125 mm
- ▲ 2 x locating holes Ø18 G7 for positioning
- ▲ 1 x locating hole Ø12 F7 for positioning

MNG

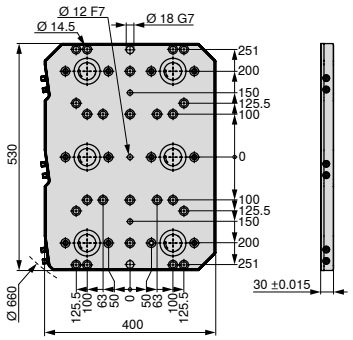

NEW

80 899 ...

Size	WT kg	EUR Y4	
400x530 mm	45	4.880,00	**64400**[1)]

1) Not ex-stock

MNG – base plate 10-sided with indexing, 496.5 x 532 mm

- ▲ MNG – Mechanical Zero-point Clamping System
- ▲ Stainless and vacuum-hardened
- ▲ Insertion force 20 kN on the clamping bolt
- ▲ 27 x mounting holes M12 for T-slot spacing 50, 63, 100, 125 mm and star slots 45°
- ▲ 2 x mating holes Ø18 G7 for positioning
- ▲ 1 x mating holes Ø12 F7 for positioning

MNG

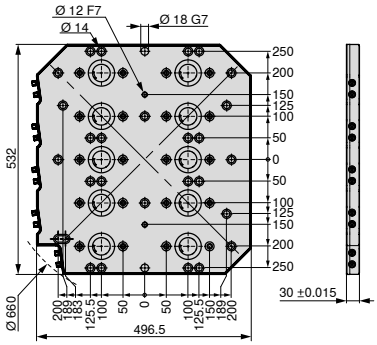

NEW

80 899 ...

Size	WT kg	EUR Y4	
496,5x532 mm	54	6.930,00	**64500**[1)]

1) Not ex-stock

Our current valid terms and conditions apply which can be found on our website. Images and prices are valid, subject to corrections due to technical improvements or further developments as well as general mistakes and typographical errors.

ENGINEERS FIRST AND FOREMOST.

JUST OUR THING

TECHNICAL SUPPORT.
WHEN YOU NEED IT MOST.

OUR WAREHOUSE IN YOUR MACHINE SHOP.

www.just-our-thing.com

THE Cutting Tool Solution

CERATIZIT GROUP

02/2025 – 99 122 00265

NEW

NEW PRODUCTS FOR MACHINING

Powerful milling – with built in sustainability!

Significant increase in performance with the new S-Cut Series from CERATIZIT, made from 99% reprocessed raw materials

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling a Sustainable Future

ceratizit.com

CERATIZIT GROUP

Noticeably increase productivity with reduced raw material usage from the new power cutters

A milling cutter which is extremely powerful, universally applicable and at the same time manufactured in a resource-efficient manner: sounds unlikely? With the S-Cut UNI and S-Cut UNImax from CERATIZIT, a tool series is now available that steps up to this challenge. It's all thanks to the latest geometry and coating technologies combined with sustainable carbide grade CT-GS20Y.

- ▲ **Universal** → suitable for a wide range of different materials
- ▲ **Sustainable** → made from 99% reprocessed carbide substrate with a specific Product Carbon Footprint (PCF)
- ▲ **Powerful** → new coating technology and geometry optimisation for unbeatable tool performance
- ▲ **Efficient** → suitable for a variety of machining processes

→ **From page 8**
You can find further information on the product here.

Sustainable carbide grade produced from 99% reprocessed raw materials

The new upGRADE grade CT-GS20Y is a 10% binder ultra-fine grain carbide with a set tungsten carbide grain size of 0.5 to 0.8 µm. This grade is the preferred choice for drilling and milling tools made of solid carbide and is therefore the ideal option when it comes to a wide range of applications. What's so special about CT-GS20Y? We use 99 % reprocessed cutting tools as a raw material. Compared to carbides from conventional production, this innovative material is manufactured in a production process that boasts a significantly lower carbon footprint. Not only that, when producing CT-GS20Y we are also very eco-conscious when it comes to energy use, resource efficiency and optimised logistics.

upGRADE carbide: Advantages/benefits

- Reduce your carbon footprint
- Outstanding product performance
- Greater reliability of supply

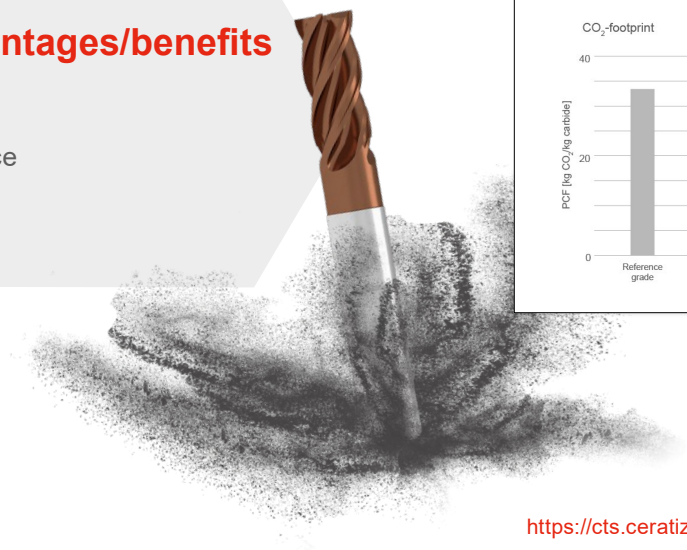

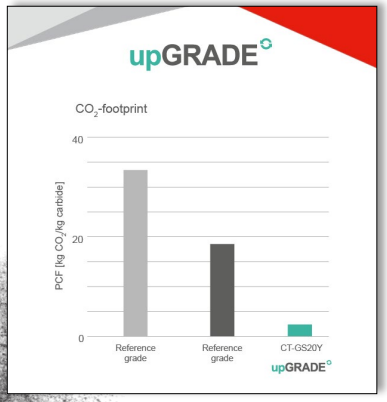

https://cts.ceratizit.com/ie/en/gs20y

Product Carbon Footprint (PCF) as a CO_2 emissions index

"Our goal is to establish a common market standard for calculating and classifying the carbon footprint of cutting tools. The Product Carbon Footprint classification. In this way, we can offer our customers the transparency they want in regard to carbon footprint."

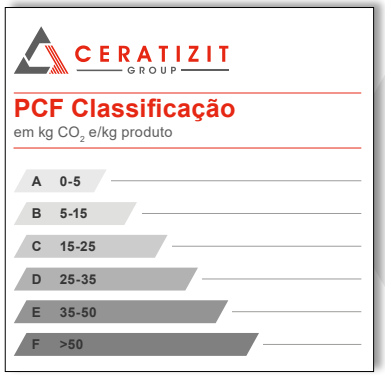

PCF classification: Advantages/benefits

- Greater transparency regarding carbon footprint
- Classification provides clear-cut information at a glance
- Option of an additional PCF certificate to calculate your own carbon footprint

https://cts.ceratizit.com/ie/en/pcf

Large product portfolio for a wide range of applications in different materials

Machining a wide variety of materials means constantly adapting to new challenges. The solution takes the form of universal milling cutters that can cope with steels, stainless steels and cast materials in equal measure. Alongside the targeted process efficiency, the aspect of sustainability is increasingly growing in importance. These two objectives are reconciled in the S-Cut solid carbide milling cutter series utilizing upGRADE from CERATIZIT.

Advantages of the S-Cut summed up:

- ▲ Carbide CT-GS20Y with verifiably lowest product carbon footprint in its class
- ▲ Option of an additional PCF certificate to calculate your own carbon footprint
- ▲ Variable helix pitch for extremely quiet running and optimum chip removal
- ▲ HB shank for optimum power transmission (HA/HB shank on S-Cut UNImax)
- ▲ The S-Cut UNImax boasts a special cutting edge geometry, designed for high-volume cutting
- ▲ Reinforced tool core for even force distribution
- ▲ Radial clearance face for unbeatable cutting edge stability
- ▲ Face finishing chamfer for top surface quality
- ▲ Irregular pitch of cutting edges specifically suppresses vibrations
- ▲ Laser-applied Data Matrix Code (DMC) for unambiguous tool tracking

https://cts.ceratizit.com/ie/en/s-cut

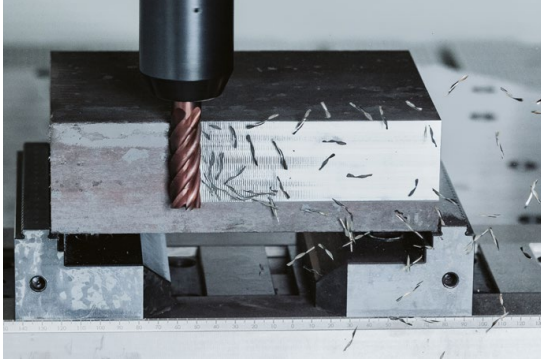

Side profiling

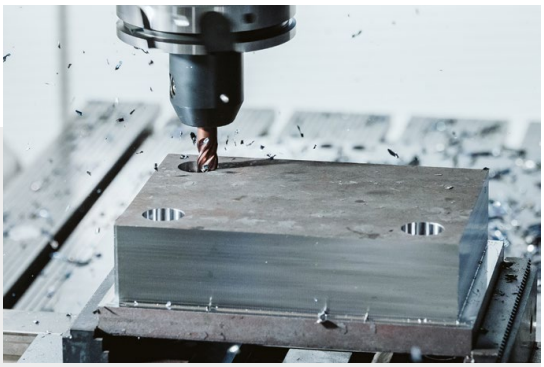

Helical milling

End milling

Trochoidal milling

Ramping milling

Full slot milling

Test report

Tool life with full slot milling (150 mm = 1 full slot) 1.2379

+ 30 %

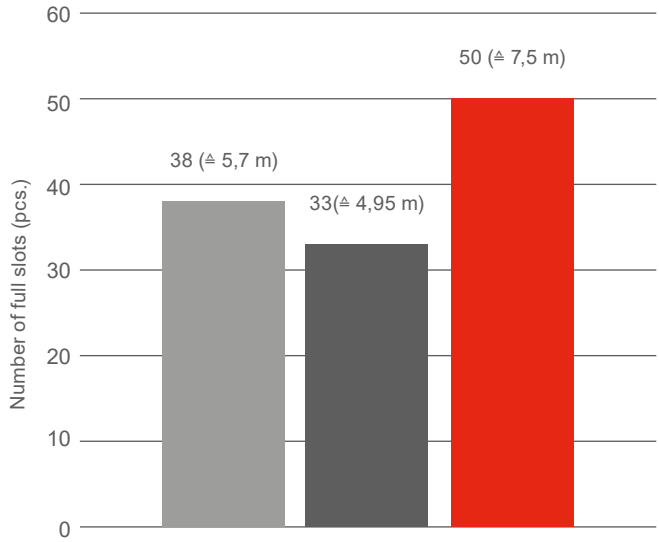

Technical data

v_c	120 m/min
f_z	0.04 mm/Z
a_p	15 mm
a_e	10 mm
Milling form	Full slot 1.5xD
Cooling	Outside air

Comparable reference tool 1

Comparable reference tool 2

S-Cut UNI

S-Cut UNI milling cutter delivers up to **30% higher performance** compared to other universal tools.
The newly developed coating, which brings with it additional performance and tool life reserves, further contributes to this.

DMC code contains the complete value chain

Tool data, tracking and search

The S-Cut UNI and S-Cut UNImax bear a laser-applied Data Matrix Code (DMC), which can be used to call up the data of the "digital twin". "This DMC contains all the information needed – once scanned, the tool can be correctly identified and its relevant technical data displayed. The customer can also see whether the tool is new or reconditioned, and how often it has already been sent to us for regrinding. And there is of course also a link to the online shop to make reordering quick and easy."

CERAsmart
ToolCycle

The laser-applied Data Matrix Code (DMC) provides a wealth of information about the tool.

DMC code: Advantages/benefits

- ▲ Unambiguous tool identification
- ▲ Tool life cycle is fully traceable
- ▲ Direct link to the product in the online shop
- ▲ Basic information including cutting data, dimensions and recommended uses
- ▲ Regrinding cycles
- ▲ Tool status

Scan the QR code and simply download and install the app:

Download on the App Store

GET IT ON Google Play

The CERAsmart ToolCycle function is available in our CERATIZIT app.
The CERATIZIT app can be downloaded free of charge from the Apple Store or Google Play Store.

Tool with serial code

Scan the DMC code with our CERATIZIT app



App view



Screen view via

CERAsmart Cockpit

S-Cut – End milling cutter

The more sustainable high-performance milling cutter for universal machining

UNI | λ_s var. | λ_s=40° γ_s=10° | HPC



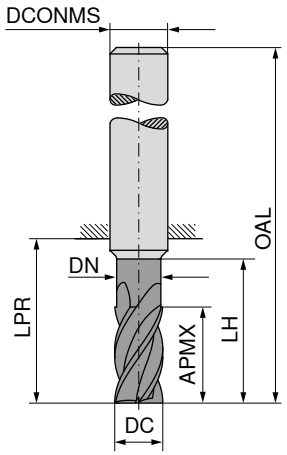

NEW

DPC72S

upGRADE

DRAGONSKIN

≈DIN 6527

52 515 ...

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
3	8	2,8	15,0	21	57	6	4	60,64	**03200**
4	11	3,8	16,5	21	57	6	4	60,64	**04200**
5	13	4,8	18,5	21	57	6	4	60,64	**05200**
6	13	5,5	21,0	21	57	6	4	60,64	**06200**
8	19	7,5	27,0	27	63	8	4	81,39	**08200**
10	22	9,5	32,0	32	72	10	4	115,46	**10200**
12	26	11,5	38,0	38	83	12	4	160,73	**12200**
16	36	15,5	44,0	44	92	16	4	260,26	**16200**
20	38	19,5	54,0	54	104	20	4	400,40	**20200**

P	●
M	●
K	●
N	○
S	○
H	
O	

→ v_c/f_z Page 14+15

S-Cut – End milling cutter

The more sustainable high-performance milling cutter for universal machining

UNI | λ_s var. | λ_s=40° γ_s=10° | HPC



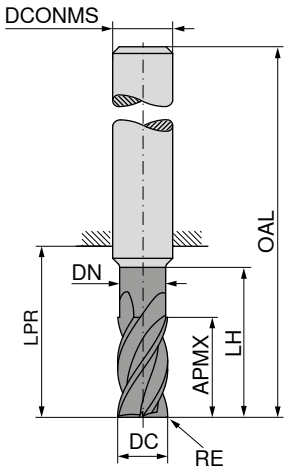

NEW DPC72S upGRADE DRAGONSKIN

NEW DPC72S upGRADE DRAGONSKIN

NEW DPC72S upGRADE DRAGONSKIN

NEW DPC72S upGRADE DRAGONSKIN

≈DIN 6527

≈DIN 6527

≈DIN 6527

≈DIN 6527

DC f8	RE	APMX	DN	LH	LPR	OAL	DCONMS h6	ZEFP	52 516 ... EUR V0		52 517 ... EUR V0		52 518 ... EUR V0		52 519 ... EUR V0	
mm	mm	mm	mm	mm	mm	mm	mm									
3	0,10	6	2,8	12,0	18	54	6	4	50,10	03100						
3	0,10	8	2,8	15,0	21	57	6	4			60,64	03200				
4	0,13	8	3,8	13,5	18	54	6	4	50,10	04100						
4	0,13	11	3,8	16,5	21	57	6	4			60,64	04200				
5	0,18	9	4,8	15,5	18	54	6	4	50,10	05100						
5	0,18	13	4,8	18,5	21	57	6	4			60,64	05200				
5	0,18	22	4,8	24,5	27	63	6	4					73,82	05300		
6	0,20	10	5,5	18,0	18	54	6	4	50,10	06100						
6	0,20	13	5,5	21,0	21	57	6	4			60,64	06200				
6	0,20	13	5,5	42,0	44	80	6	4							92,75	06400
6	0,20	22	5,5	27,0	27	63	6	4					73,82	06300		
8	0,20	12	7,5	22,0	22	58	8	4	68,03	08100						
8	0,20	19	7,5	27,0	27	63	8	4			81,39	08200				
8	0,20	21	7,5	62,0	64	100	8	4							109,73	08400
8	0,20	28	7,5	36,0	44	80	8	4					90,81	08300		
10	0,30	14	9,5	26,0	26	66	10	4	92,75	10100						
10	0,30	22	9,5	32,0	32	72	10	4			115,46	10200				
10	0,30	22	9,5	58,0	60	100	10	4							136,27	10400
10	0,30	33	9,5	54,0	60	100	10	4					117,28	10300		
12	0,30	16	11,5	28,0	28	73	12	4	138,09	12100						
12	0,30	26	11,5	38,0	38	83	12	4			160,73	12200				
12	0,30	26	11,5	73,0	75	120	12	4							169,83	12400
12	0,30	42	11,5	54,0	55	100	12	4					151,52	12300		
14	0,30	18	13,5	30,0	30	75	14	4	176,31	14100						
14	0,30	26	13,5	38,0	38	83	14	4			207,48	14200				
14	0,30	48	13,5	54,0	55	100	14	4					169,83	14300		
16	0,40	22	15,5	34,0	34	82	16	4	221,02	16100						
16	0,40	36	15,5	44,0	44	92	16	4			260,26	16200				
16	0,40	36	15,5	100,0	102	150	16	4							296,43	16400
16	0,40	53	15,5	84,0	102	150	16	4					278,46	16300		
20	0,50	26	19,5	42,0	42	92	20	4	344,44	20100						
20	0,50	38	19,5	54,0	54	104	20	4			400,40	20200				
20	0,50	38	19,5	100,0	100	150	20	4							420,31	20400
20	0,50	68	19,5	84,0	100	150	20	4					400,40	20300		

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O				

→ v_c/f_z Page 14–19

S-Cut – End milling cutter with corner radius

The more sustainable high-performance milling cutter for universal machining

UNI | λ_s var. | λ_s=40° γ_s=10° | HPC



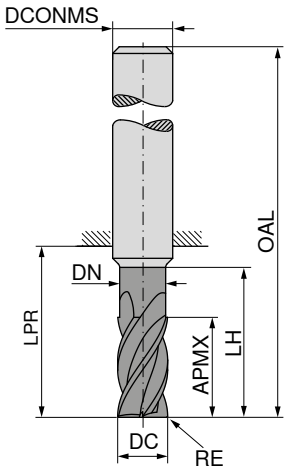

NEW

DPC72S

upGRADE

DRAGONSKIN

≈DIN 6527

52 520 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
3	0,25	8	2,8	15,0	21	57	6	4	60,64	03203
3	0,50	8	2,8	15,0	21	57	6	4	60,64	03205
3	1,00	8	2,8	15,0	21	57	6	4	60,64	03210
4	0,25	11	3,8	16,5	21	57	6	4	60,64	04203
4	0,50	11	3,8	16,5	21	57	6	4	60,64	04205
4	1,00	11	3,8	16,5	21	57	6	4	60,64	04210
5	0,50	13	4,8	18,5	21	57	6	4	60,64	05205
5	1,00	13	4,8	18,5	21	57	6	4	60,64	05210
5	1,50	13	4,8	18,5	21	57	6	4	60,64	05215
6	0,50	13	5,5	21,0	21	57	6	4	60,64	06205
6	0,80	13	5,5	21,0	21	57	6	4	60,64	06208
6	1,00	13	5,5	21,0	21	57	6	4	60,64	06210
6	1,50	13	5,5	21,0	21	57	6	4	60,64	06215
6	2,00	13	5,5	21,0	21	57	6	4	60,64	06220
8	0,50	19	7,5	27,0	27	63	8	4	81,39	08205
8	0,80	19	7,5	27,0	27	63	8	4	81,39	08208
8	1,00	19	7,5	27,0	27	63	8	4	81,39	08210
8	1,50	19	7,5	27,0	27	63	8	4	81,39	08215
8	2,00	19	7,5	27,0	27	63	8	4	81,39	08220
10	0,50	22	9,5	32,0	32	72	10	4	115,46	10205
10	1,00	22	9,5	32,0	32	72	10	4	115,46	10210
10	1,50	22	9,5	32,0	32	72	10	4	115,46	10215
10	1,60	22	9,5	32,0	32	72	10	4	115,46	10216
10	2,00	22	9,5	32,0	32	72	10	4	115,46	10220
12	0,50	26	11,5	38,0	38	83	12	4	160,73	12205
12	1,00	26	11,5	38,0	38	83	12	4	160,73	12210
12	1,50	26	11,5	38,0	38	83	12	4	160,73	12215
12	1,60	26	11,5	38,0	38	83	12	4	160,73	12216
12	2,00	26	11,5	38,0	38	83	12	4	160,73	12220
12	3,00	26	11,5	38,0	38	83	12	4	160,73	12230
16	1,00	36	15,5	44,0	44	92	16	4	260,26	16210
16	1,50	36	15,5	44,0	44	92	16	4	260,26	16215
16	1,60	36	15,5	44,0	44	92	16	4	260,26	16216
16	2,00	36	15,5	44,0	44	92	16	4	260,26	16220
16	2,50	36	15,5	44,0	44	92	16	4	260,26	16225
16	3,00	36	15,5	44,0	44	92	16	4	260,26	16230
20	1,00	38	19,5	54,0	54	104	20	4	400,40	20210
20	1,50	38	19,5	54,0	54	104	20	4	400,40	20215
20	2,00	38	19,5	54,0	54	104	20	4	400,40	20220
20	2,50	38	19,5	54,0	54	104	20	4	400,40	20225
20	3,00	38	19,5	54,0	54	104	20	4	400,40	20230
20	4,00	38	19,5	54,0	54	104	20	4	400,40	20240

P	●
M	●
K	●
N	○
S	○
H	
O	

→ v_c/f_z Page 14+15

S-Cut – End milling cutter

The more sustainable high-performance milling cutter for universal machining

- ▲ suitable for trochoidal milling
- ▲ with chip breaker
- ▲ Cutting depth: 3 x DC

UNI | λ_s var. | λ_s=40° γ_s=10° | HPC



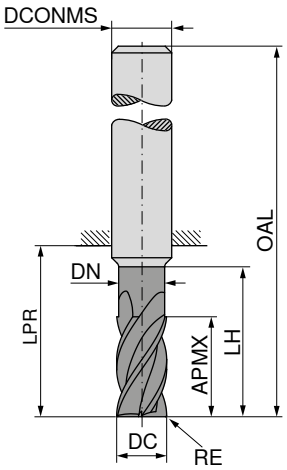

NEW

DPC72S

upGRADE

DRAGONSKIN

≈DIN 6527

52 521 ...

DC f8 mm	RE mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
6	0,12	18	5,5	25	26	62	6	5	89,96	**06200**
8	0,16	24	7,5	30	32	68	8	5	119,10	**08200**
10	0,20	30	9,5	35	40	80	10	5	151,52	**10200**
12	0,24	36	11,5	45	48	93	12	5	199,40	**12200**
14	0,28	42	13,5	52	56	100	14	5	265,10	**14200**
16	0,32	48	15,5	55	60	108	16	5	341,02	**16200**
18	0,36	54	17,5	67	72	120	18	5	458,20	**18200**
20	0,40	60	19,5	70	76	126	20	5	537,24	**20200**

P	●
M	●
K	●
N	○
S	○
H	
O	

→ v_c/f_z Page 20+21

S-Cut – End milling cutter

The more sustainable high-performance milling cutter for universal machining

▲ Specially designed for high-volume machining

UNImax | λ_s var. | λ_s=17°-45° γ_s=15° | HPC



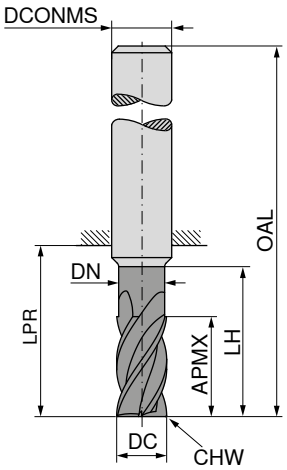

NEW DPC72S upGRADE DRAGONSKIN

NEW DPC72S upGRADE DRAGONSKIN

DIN 6527

DIN 6527

DC f8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	52 522 ... EUR V0/5A		52 523 ... EUR V0/5A	
3	8	2,8	13	21	57	6	0,1	4	56,61	**03200**	56,61	**03200**
4	11	3,8	17	21	57	6	0,1	4	56,61	**04200**	56,61	**04200**
5	13	4,8	19	21	57	6	0,1	4	56,61	**05200**	56,61	**05200**
6	13	5,8	19	21	57	6	0,1	4	56,61	**06200**	56,61	**06200**
8	21	7,7	25	27	63	8	0,2	4	76,32	**08200**	76,32	**08200**
10	22	9,7	30	32	72	10	0,2	4	111,69	**10200**	111,69	**10200**
12	26	11,6	36	38	83	12	0,3	4	142,74	**12200**	142,74	**12200**
14	26	13,6	36	38	83	14	0,3	4	197,27	**14200**	197,27	**14200**
16	36	15,5	42	44	92	16	0,3	4	322,02	**16200**	322,02	**16200**
18	36	17,5	42	44	92	18	0,3	4	422,42	**18200**	422,42	**18200**
20	41	19,5	52	54	104	20	0,3	4	439,10	**20200**	439,10	**20200**
P									●		●	
M									●		●	
K									●		●	
N									○		○	
S												
H												
O												

→ v_c/f_z Page 22+23

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

* Tensile strength

Cutting data standard values – S-Cut UNI – End mill

Index	Type short		Type long		52 515…, 52 516…, 52 517…, 52 520…															
					Ø DC (mm) =															
					3			4			5			6			8		
					a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	220	1,0	220	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.1.2	210	1,0	210	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.1.3	210	1,0	210	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.1.4	200	1,0	200	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.1.5	200	1,0	200	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.2.1	210	1,0	210	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.2.2	200	1,0	200	1,5	0,025	0,021	0,015	0,035	0,029	0,020	0,046	0,038	0,027	0,056	0,047	0,033	0,076	0,063	0,044
P.2.3	190	1,0	190	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.2.4	180	1,0	180	1,5	0,025	0,021	0,015	0,035	0,029	0,020	0,046	0,038	0,027	0,056	0,047	0,033	0,076	0,063	0,044
P.3.1	190	1,0	190	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.3.2	180	1,0	180	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.3.3	150	1,0	150	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
P.4.1	100	1,0	100	1,5	0,016	0,013	0,009	0,022	0,018	0,013	0,029	0,024	0,017	0,035	0,029	0,020	0,049	0,041	0,029
P.4.2	95	1,0	95	1,5	0,016	0,013	0,009	0,022	0,018	0,013	0,029	0,024	0,017	0,035	0,029	0,020	0,049	0,041	0,029
M.1.1	100	1,0	100	1,5	0,016	0,013	0,009	0,022	0,018	0,013	0,029	0,024	0,017	0,035	0,029	0,020	0,049	0,041	0,029
M.2.1	90	1,0	90	1,5	0,016	0,013	0,009	0,022	0,018	0,013	0,029	0,024	0,017	0,035	0,029	0,020	0,049	0,041	0,029
M.3.1	85	1,0	85	1,5	0,016	0,013	0,009	0,022	0,018	0,013	0,029	0,024	0,017	0,035	0,029	0,020	0,049	0,041	0,029
K.1.1	230	1,0	230	1,5	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	1,176	0,980	0,686
K.1.2	210	1,0	210	1,5	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	1,176	0,980	0,686
K.2.1	220	1,0	220	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
K.2.2	200	1,0	200	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
K.3.1	210	1,0	210	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
K.3.2	190	1,0	190	1,5	0,034	0,028	0,020	0,043	0,036	0,025	0,055	0,046	0,032	0,065	0,054	0,038	0,088	0,073	0,051
N.1.1																			
N.1.2																			
N.2.1	500	1,0	500	1,5	0,046	0,038	0,027	0,061	0,051	0,036	0,076	0,063	0,044	0,091	0,076	0,053	0,120	0,100	0,070
N.2.2	480	1,0	480	1,5	0,044	0,037	0,026	0,060	0,050	0,035	0,074	0,062	0,043	0,090	0,075	0,053	1,188	0,990	0,693
N.2.3	420	1,0	420	1,5	0,044	0,037	0,026	0,060	0,050	0,035	0,074	0,062	0,043	0,090	0,075	0,053	1,188	0,990	0,693
N.3.1	340	1,0	340	1,5	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	1,176	0,980	0,686
N.3.2	340	1,0	340	1,5	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	1,176	0,980	0,686
N.3.3	270	1,0	270	1,5	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	1,176	0,980	0,686
N.4.1																			
S.1.1	30	1,0	30	1,5	0,013	0,011	0,008	0,018	0,015	0,011	0,023	0,019	0,013	0,028	0,023	0,016	0,037	0,031	0,022
S.1.2	30	1,0	30	1,5	0,013	0,011	0,008	0,018	0,015	0,011	0,023	0,019	0,013	0,028	0,023	0,016	0,037	0,031	0,022
S.2.1	30	1,0	30	1,5	0,013	0,011	0,008	0,018	0,015	0,011	0,023	0,019	0,013	0,028	0,023	0,016	0,037	0,031	0,022
S.2.2	30	1,0	30	1,5	0,013	0,011	0,008	0,018	0,015	0,011	0,023	0,019	0,013	0,028	0,023	0,016	0,037	0,031	0,022
S.2.3	30	1,0	30	1,5	0,013	0,011	0,008	0,018	0,015	0,011	0,023	0,019	0,013	0,028	0,023	0,016	0,037	0,031	0,022
S.3.1	80	1,0	80	1,5	0,025	0,021	0,015	0,035	0,029	0,020	0,046	0,038	0,027	0,056	0,047	0,033	0,076	0,063	0,044
S.3.2	50	1,0	50	1,5	0,016	0,013	0,009	0,022	0,018	0,013	0,029	0,024	0,017	0,035	0,029	0,020	0,049	0,041	0,029
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Plunging angle for ramping and helical milling:

Ø 3 =	2°	Ø 10 =	5°
Ø 4 =	2°	Ø 12 =	8°
Ø 5 =	2,5°	Ø 14 =	8°
Ø 6 =	3°	Ø 16 =	10°
Ø 8 =	4°	Ø 20 =	15°

Index	52 515..., 52 516..., 52 517..., 52 520...															● 1st choice ○ suitable		
	Ø DC (mm) =																	
	10			12			14			16			20					
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MQL
	f_z (mm)																	
P.1.1	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.1.2	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.1.3	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.1.4	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.1.5	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.2.1	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.2.2	0,095	0,079	0,055	0,114	0,095	0,067	0,120	0,100	0,070	0,130	0,108	0,076	0,144	0,120	0,084	●	●	○
P.2.3	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.2.4	0,095	0,079	0,055	0,114	0,095	0,067	0,120	0,100	0,070	0,130	0,108	0,076	0,144	0,120	0,084	●	●	○
P.3.1	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.3.2	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.3.3	0,109	0,091	0,064	0,132	0,110	0,077	0,144	0,120	0,084	0,154	0,128	0,090	0,168	0,140	0,098	●	●	○
P.4.1	0,062	0,052	0,036	0,076	0,063	0,044	0,084	0,070	0,049	0,096	0,080	0,056	0,108	0,090	0,063	●	○	
P.4.2	0,062	0,052	0,036	0,076	0,063	0,044	0,084	0,070	0,049	0,096	0,080	0,056	0,108	0,090	0,063	●	○	
M.1.1	0,062	0,052	0,036	0,076	0,063	0,044	0,084	0,070	0,049	0,096	0,080	0,056	0,108	0,090	0,063	●	○	
M.2.1	0,062	0,052	0,036	0,076	0,063	0,044	0,084	0,070	0,049	0,096	0,080	0,056	0,108	0,090	0,063	●	○	
M.3.1	0,062	0,052	0,036	0,076	0,063	0,044	0,084	0,070	0,049	0,096	0,080	0,056	0,108	0,090	0,063	●	○	
K.1.1	0,148	0,123	0,086	0,180	0,150	0,105	0,204	0,170	0,119	0,216	0,180	0,126	0,240	0,200	0,140	●	●	●
K.1.2	0,148	0,123	0,086	0,180	0,150	0,105	0,204	0,170	0,119	0,216	0,180	0,126	0,240	0,200	0,140	●	●	●
K.2.1	0,108	0,090	0,063	0,132	0,110	0,077	0,156	0,130	0,091	0,168	0,140	0,098	0,192	0,160	0,112	●	●	●
K.2.2	0,108	0,090	0,063	0,132	0,110	0,077	0,156	0,130	0,091	0,168	0,140	0,098	0,192	0,160	0,112	●	●	●
K.3.1	0,108	0,090	0,063	0,132	0,110	0,077	0,156	0,130	0,091	0,168	0,140	0,098	0,192	0,160	0,112	●	●	●
K.3.2	0,108	0,090	0,063	0,132	0,110	0,077	0,156	0,130	0,091	0,168	0,140	0,098	0,192	0,160	0,112	●	●	●
N.1.1																		
N.1.2																		
N.2.1	0,162	0,135	0,095	0,186	0,155	0,109	0,216	0,180	0,126	0,228	0,190	0,133	0,240	0,200	0,140	●	●	
N.2.2	0,156	0,130	0,091	0,180	0,150	0,105	0,210	0,175	0,123	0,222	0,185	0,130	0,234	0,195	0,137	●	●	
N.2.3	0,156	0,130	0,091	0,180	0,150	0,105	0,210	0,175	0,123	0,222	0,185	0,130	0,234	0,195	0,137	●	●	
N.3.1	0,144	0,120	0,084	0,174	0,145	0,102	0,204	0,170	0,119	0,216	0,180	0,126	0,228	0,190	0,133	●	●	
N.3.2	0,144	0,120	0,084	0,174	0,145	0,102	0,204	0,170	0,119	0,216	0,180	0,126	0,228	0,190	0,133	●	●	
N.3.3	0,144	0,120	0,084	0,174	0,145	0,102	0,204	0,170	0,119	0,216	0,180	0,126	0,228	0,190	0,133	●	●	
N.4.1																		
S.1.1	0,047	0,039	0,027	0,056	0,047	0,033	0,066	0,055	0,039	0,071	0,059	0,041	0,079	0,066	0,046	●		
S.1.2	0,047	0,039	0,027	0,056	0,047	0,033	0,066	0,055	0,039	0,071	0,059	0,041	0,079	0,066	0,046	●		
S.2.1	0,047	0,039	0,027	0,056	0,047	0,033	0,066	0,055	0,039	0,071	0,059	0,041	0,079	0,066	0,046	●		
S.2.2	0,047	0,039	0,027	0,056	0,047	0,033	0,066	0,055	0,039	0,071	0,059	0,041	0,079	0,066	0,046	●		
S.2.3	0,047	0,039	0,027	0,056	0,047	0,033	0,066	0,055	0,039	0,071	0,059	0,041	0,079	0,066	0,046	●		
S.3.1	0,095	0,079	0,055	0,114	0,095	0,067	0,132	0,110	0,077	0,137	0,114	0,080	0,144	0,120	0,084	●		
S.3.2	0,062	0,052	0,036	0,076	0,063	0,044	0,089	0,074	0,052	0,094	0,078	0,055	0,106	0,088	0,062	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – S-Cut UNI – End mill

Index	Medium-length version		52 518 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	210	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.1.2	200	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.1.3	200	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.1.4	190	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.1.5	190	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.2.1	200	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.2.2	190	1,5	0,022	0,018	0,013	0,031	0,026	0,018	0,042	0,035	0,025	0,053	0,044	0,031	0,072	0,060	0,042	
P.2.3	180	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.2.4	170	1,5	0,022	0,018	0,013	0,031	0,026	0,018	0,042	0,035	0,025	0,053	0,044	0,031	0,072	0,060	0,042	
P.3.1	180	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.3.2	170	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.3.3	140	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
P.4.1	95	1,5	0,012	0,010	0,007	0,018	0,015	0,011	0,025	0,021	0,015	0,031	0,026	0,018	0,046	0,038	0,027	
P.4.2	90	1,5	0,012	0,010	0,007	0,018	0,015	0,011	0,025	0,021	0,015	0,031	0,026	0,018	0,046	0,038	0,027	
M.1.1	95	1,5	0,012	0,010	0,007	0,018	0,015	0,011	0,025	0,021	0,015	0,031	0,026	0,018	0,046	0,038	0,027	
M.2.1	85	1,5	0,012	0,010	0,007	0,018	0,015	0,011	0,025	0,021	0,015	0,031	0,026	0,018	0,046	0,038	0,027	
M.3.1	80	1,5	0,012	0,010	0,007	0,018	0,015	0,011	0,025	0,021	0,015	0,031	0,026	0,018	0,046	0,038	0,027	
K.1.1	220	1,5	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	0,114	0,095	0,067	
K.1.2	200	1,5	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	0,114	0,095	0,067	
K.2.1	210	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
K.2.2	190	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
K.3.1	200	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
K.3.2	180	1,5	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	0,084	0,070	0,049	
N.1.1																		
N.1.2																		
N.2.1	480	1,5	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	0,116	0,097	0,068	
N.2.2	460	1,5	0,041	0,034	0,024	0,056	0,047	0,033	0,071	0,059	0,041	0,086	0,072	0,050	0,115	0,096	0,067	
N.2.3	400	1,5	0,041	0,034	0,024	0,056	0,047	0,033	0,071	0,059	0,041	0,086	0,072	0,050	0,115	0,096	0,067	
N.3.1	320	1,5	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	0,114	0,095	0,067	
N.3.2	320	1,5	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	0,114	0,095	0,067	
N.3.3	250	1,5	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	0,114	0,095	0,067	
N.4.1																		
S.1.1	25	1,5	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	0,035	0,029	0,020	
S.1.2	25	1,5	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	0,035	0,029	0,020	
S.2.1	25	1,5	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	0,035	0,029	0,020	
S.2.2	25	1,5	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	0,035	0,029	0,020	
S.2.3	25	1,5	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	0,035	0,029	0,020	
S.3.1	75	1,5	0,023	0,019	0,013	0,032	0,027	0,019	0,043	0,036	0,025	0,054	0,045	0,032	0,073	0,061	0,043	
S.3.2	45	1,5	0,013	0,011	0,008	0,019	0,016	0,011	0,026	0,022	0,015	0,032	0,027	0,019	0,047	0,039	0,027	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling:

Ø 3 =	1°	Ø 10 =	4°
Ø 4 =	1°	Ø 12 =	6°
Ø 5 =	1,5°	Ø 14 =	6°
Ø 6 =	2°	Ø 16 =	8°
Ø 8 =	3°	Ø 20 =	10°

Index	52 518 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	10			12			14			16			20						
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MQL
	f_z (mm)																		
P.1.1	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.1.2	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.1.3	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.1.4	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.1.5	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.2.1	0,106	0,088	0,062	0,120	0,100	0,070	0,013	0,011	0,008	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.2.2	0,091	0,076	0,053	0,102	0,085	0,060	0,108	0,090	0,063	0,120	0,100	0,070	0,132	0,110	0,077	●	●	○
P.2.3	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.2.4	0,091	0,076	0,053	0,102	0,085	0,060	0,108	0,090	0,063	0,120	0,100	0,070	0,132	0,110	0,077	●	●	○
P.3.1	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.3.2	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.3.3	0,106	0,088	0,062	0,012	0,010	0,007	0,013	0,011	0,008	0,144	0,120	0,084	0,156	0,130	0,091	●	●	○
P.4.1	0,059	0,049	0,034	0,066	0,055	0,039	0,072	0,060	0,042	0,084	0,070	0,049	0,096	0,080	0,056	●	○	
P.4.2	0,059	0,049	0,034	0,066	0,055	0,039	0,072	0,060	0,042	0,084	0,070	0,049	0,096	0,080	0,056	●	○	
M.1.1	0,059	0,049	0,034	0,066	0,055	0,039	0,072	0,060	0,042	0,084	0,070	0,049	0,096	0,080	0,056	●	○	
M.2.1	0,059	0,049	0,034	0,066	0,055	0,039	0,072	0,060	0,042	0,084	0,070	0,049	0,096	0,080	0,056	●	○	
M.3.1	0,059	0,049	0,034	0,066	0,055	0,039	0,072	0,060	0,042	0,084	0,070	0,049	0,096	0,080	0,056	●	○	
K.1.1	0,144	0,120	0,084	0,168	0,140	0,098	0,192	0,160	0,112	0,204	0,170	0,119	0,228	0,190	0,133	●	●	●
K.1.2	0,144	0,120	0,084	0,168	0,140	0,098	0,192	0,160	0,112	0,204	0,170	0,119	0,228	0,190	0,133	●	●	●
K.2.1	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	0,180	0,150	0,105	●	●	●
K.2.2	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	0,180	0,150	0,105	●	●	●
K.3.1	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	0,180	0,150	0,105	●	●	●
K.3.2	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	0,180	0,150	0,105	●	●	●
N.1.1																		
N.1.2																		
N.2.1	0,158	0,132	0,092	0,174	0,145	0,102	0,204	0,170	0,119	0,216	0,180	0,126	0,228	0,190	0,133	●	●	
N.2.2	0,152	0,127	0,089	0,168	0,140	0,098	0,198	0,165	0,116	0,210	0,175	0,123	0,222	0,185	0,130	●	●	
N.2.3	0,152	0,127	0,089	0,017	0,014	0,010	0,198	0,165	0,116	0,210	0,175	0,123	0,222	0,185	0,130	●	●	
N.3.1	0,140	0,117	0,082	0,162	0,135	0,095	0,192	0,160	0,112	0,204	0,170	0,119	0,216	0,180	0,126	●	●	
N.3.2	0,140	0,117	0,082	0,162	0,135	0,095	0,192	0,160	0,112	0,204	0,170	0,119	0,216	0,180	0,126	●	●	
N.3.3	0,140	0,117	0,082	0,162	0,135	0,095	0,192	0,160	0,112	0,204	0,170	0,119	0,216	0,180	0,126	●	●	
N.4.1																		
S.1.1	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	0,077	0,064	0,045	●		
S.1.2	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	0,077	0,064	0,045	●		
S.2.1	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	0,077	0,064	0,045	●		
S.2.2	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	0,077	0,064	0,045	●		
S.2.3	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	0,077	0,064	0,045	●		
S.3.1	0,092	0,077	0,054	0,110	0,092	0,064	0,120	0,100	0,070	0,134	0,112	0,078	0,142	0,118	0,083	●		
S.3.2	0,060	0,050	0,035	0,072	0,060	0,042	0,086	0,072	0,050	0,091	0,076	0,053	0,103	0,086	0,060	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – S-Cut UNI – End mill

Index	Type extra long		52 519 ...															
			Ø DC (mm) =															
			3			4			5			6			8			
			a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	150	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.1.2	130	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.1.3	125	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.1.4	125	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.1.5	120	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.2.1	130	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.2.2	125	1,0	0,014	0,012	0,008	0,022	0,018	0,013	0,031	0,026	0,018	0,042	0,035	0,025	0,053	0,044	0,031	
P.2.3	115	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.2.4	110	1,0	0,014	0,012	0,008	0,022	0,018	0,013	0,031	0,026	0,018	0,042	0,035	0,025	0,053	0,044	0,031	
P.3.1	130	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.3.2	80	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.3.3	85	1,0	0,022	0,018	0,013	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
P.4.1	90	1,0	0,012	0,010	0,007	0,017	0,014	0,010	0,023	0,019	0,013	0,029	0,024	0,017	0,037	0,031	0,022	
P.4.2	85	1,0	0,012	0,010	0,007	0,017	0,014	0,010	0,023	0,019	0,013	0,029	0,024	0,017	0,037	0,031	0,022	
M.1.1	80	1,0	0,012	0,010	0,007	0,017	0,014	0,010	0,023	0,019	0,013	0,029	0,024	0,017	0,037	0,031	0,022	
M.2.1	75	1,0	0,012	0,010	0,007	0,017	0,014	0,010	0,023	0,019	0,013	0,029	0,024	0,017	0,037	0,031	0,022	
M.3.1	70	1,0	0,012	0,010	0,007	0,017	0,014	0,010	0,023	0,019	0,013	0,029	0,024	0,017	0,037	0,031	0,022	
K.1.1	140	1,0	0,032	0,027	0,019	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	
K.1.2	130	1,0	0,032	0,027	0,019	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	
K.2.1	140	1,0	0,025	0,021	0,015	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
K.2.2	130	1,0	0,025	0,021	0,015	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
K.3.1	135	1,0	0,025	0,021	0,015	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
K.3.2	125	1,0	0,025	0,021	0,015	0,030	0,025	0,018	0,040	0,033	0,023	0,052	0,043	0,030	0,061	0,051	0,036	
N.1.1																		
N.1.2																		
N.2.1	350	1,0	0,035	0,029	0,020	0,042	0,035	0,025	0,058	0,048	0,034	0,072	0,060	0,042	0,088	0,073	0,051	
N.2.2	340	1,0	0,034	0,028	0,020	0,041	0,034	0,024	0,056	0,047	0,033	0,071	0,059	0,041	0,086	0,072	0,050	
N.2.3	300	1,0	0,034	0,028	0,020	0,041	0,034	0,024	0,056	0,047	0,033	0,071	0,059	0,041	0,086	0,072	0,050	
N.3.1	230	1,0	0,031	0,026	0,018	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	
N.3.2	240	1,0	0,031	0,026	0,018	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	
N.3.3	190	1,0	0,031	0,026	0,018	0,038	0,032	0,022	0,054	0,045	0,032	0,068	0,057	0,040	0,084	0,070	0,049	
N.4.1																		
S.1.1	25	1,0	0,008	0,007	0,005	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	
S.1.2	25	1,0	0,008	0,007	0,005	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	
S.2.1	25	1,0	0,008	0,007	0,005	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	
S.2.2	25	1,0	0,008	0,007	0,005	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	
S.2.3	25	1,0	0,008	0,007	0,005	0,011	0,009	0,006	0,016	0,013	0,009	0,020	0,017	0,012	0,025	0,021	0,015	
S.3.1	75	1,0	0,002	0,002	0,001	0,023	0,019	0,013	0,032	0,027	0,019	0,043	0,036	0,025	0,054	0,045	0,032	
S.3.2	45	1,0	0,011	0,009	0,006	0,013	0,011	0,008	0,019	0,016	0,011	0,026	0,022	0,015	0,032	0,027	0,019	
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling:

Ø 3 =	1°	Ø 10 =	4°
Ø 4 =	1°	Ø 12 =	6°
Ø 5 =	1,5°	Ø 14 =	6°
Ø 6 =	2°	Ø 16 =	8°
Ø 8 =	3°	Ø 20 =	10°

Index	52 519 ...																● 1st choice ○ suitable		
	Ø DC (mm) =																		
	10			12			14			16			20						
	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,1–0,2 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MQL
	f_z (mm)																		
P.1.1	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.1.2	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.1.3	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.1.4	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.1.5	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.2.1	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,013	0,011	0,008	0,144	0,120	0,084	●	●	○
P.2.2	0,072	0,060	0,042	0,091	0,076	0,053	0,102	0,085	0,060	0,108	0,090	0,063	0,120	0,100	0,070	●	●	○
P.2.3	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.2.4	0,072	0,060	0,042	0,091	0,076	0,053	0,102	0,085	0,060	0,108	0,090	0,063	0,120	0,100	0,070	●	●	○
P.3.1	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.3.2	0,084	0,070	0,049	0,106	0,088	0,062	0,120	0,100	0,070	0,132	0,110	0,077	0,144	0,120	0,084	●	●	○
P.3.3	0,084	0,070	0,049	0,106	0,088	0,062	0,012	0,010	0,007	0,013	0,011	0,008	0,144	0,120	0,084	●	●	○
P.4.1	0,048	0,040	0,028	0,062	0,052	0,036	0,072	0,060	0,042	0,086	0,072	0,050	0,100	0,083	0,058	●	○	
P.4.2	0,048	0,040	0,028	0,062	0,052	0,036	0,072	0,060	0,042	0,086	0,072	0,050	0,100	0,083	0,058	●	○	
M.1.1	0,048	0,040	0,028	0,062	0,052	0,036	0,072	0,060	0,042	0,086	0,072	0,050	0,100	0,083	0,058	●	○	
M.2.1	0,048	0,040	0,028	0,062	0,052	0,036	0,072	0,060	0,042	0,086	0,072	0,050	0,100	0,083	0,058	●	○	
M.3.1	0,048	0,040	0,028	0,062	0,052	0,036	0,072	0,060	0,042	0,086	0,072	0,050	0,100	0,083	0,058	●	○	
K.1.1	0,114	0,095	0,067	0,144	0,120	0,084	0,168	0,140	0,098	0,192	0,160	0,112	0,204	0,170	0,119	●	●	●
K.1.2	0,114	0,095	0,067	0,144	0,120	0,084	0,168	0,140	0,098	0,192	0,160	0,112	0,204	0,170	0,119	●	●	●
K.2.1	0,084	0,070	0,049	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	●	●	●
K.2.2	0,084	0,070	0,049	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	●	●	●
K.3.1	0,084	0,070	0,049	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	●	●	●
K.3.2	0,084	0,070	0,049	0,104	0,087	0,061	0,120	0,100	0,070	0,144	0,120	0,084	0,156	0,130	0,091	●	●	●
N.1.1																		
N.1.2																		
N.2.1	0,116	0,097	0,068	0,158	0,132	0,092	0,174	0,145	0,102	0,204	0,170	0,119	0,216	0,180	0,126	●	●	
N.2.2	0,115	0,096	0,067	0,152	0,127	0,089	0,168	0,140	0,098	0,198	0,165	0,116	0,210	0,175	0,123	●	●	
N.2.3	0,115	0,096	0,067	0,152	0,127	0,089	0,017	0,014	0,010	0,198	0,165	0,116	0,210	0,175	0,123	●	●	
N.3.1	0,114	0,095	0,067	0,140	0,117	0,082	0,162	0,135	0,095	0,192	0,160	0,112	0,204	0,170	0,119	●	●	
N.3.2	0,114	0,095	0,067	0,140	0,117	0,082	0,162	0,135	0,095	0,192	0,160	0,112	0,204	0,170	0,119	●	●	
N.3.3	0,114	0,095	0,067	0,140	0,117	0,082	0,162	0,135	0,095	0,192	0,160	0,112	0,204	0,170	0,119	●	●	
N.4.1																		
S.1.1	0,035	0,029	0,020	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	●		
S.1.2	0,035	0,029	0,020	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	●		
S.2.1	0,035	0,029	0,020	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	●		
S.2.2	0,035	0,029	0,020	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	●		
S.2.3	0,035	0,029	0,020	0,044	0,037	0,026	0,054	0,045	0,032	0,064	0,053	0,037	0,068	0,057	0,040	●		
S.3.1	0,073	0,061	0,043	0,092	0,077	0,054	0,110	0,092	0,064	0,120	0,100	0,070	0,134	0,112	0,078	●		
S.3.2	0,047	0,039	0,027	0,060	0,050	0,035	0,072	0,060	0,042	0,086	0,072	0,050	0,091	0,076	0,053	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting data standard values – S-Cut UNI – End mill – trochoidal milling

Index	Type long		52 521 ...															
			Ø DC (mm) =															
			6				8				10				12			
	v_c (m/min)	max. angle of engagement	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
			f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)			
P.1.1	300	45°	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047
P.1.2	300	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.1.3	290	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.1.4	280	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.1.5	250	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.2.1	280	45°	1,13	0,90	0,68	0,285	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047
P.2.2	270	45°	1,13	0,90	0,68	0,285	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047
P.2.3	240	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.2.4	210	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.3.1	230	45°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.3.2	210	40°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.3.3	190	40°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
P.4.1	180	40°	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032
P.4.2	170	40°	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032
M.1.1	160	40°	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032
M.2.1	160	40°	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032
M.3.1	150	40°	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032
K.1.1	300	50°	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047
K.1.2	300	50°	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047
K.2.1	300	50°	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047
K.2.2	270	50°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
K.3.1	260	50°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
K.3.2	200	50°	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
N.1.1																		
N.1.2																		
N.2.1	420	55°	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	0,15	0,12	0,09	0,038	0,18	0,14	0,11	0,044
N.2.2	320	55°	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	0,15	0,12	0,09	0,038	0,18	0,14	0,11	0,044
N.2.3	250	55°	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	0,16	0,13	0,10	0,041
N.3.1	300	50°	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,15	0,12	0,09	0,038
N.3.2	190	50°	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,15	0,12	0,09	0,038
N.3.3	270	50°	0,09	0,07	0,05	0,022	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,14	0,11	0,08	0,035
N.4.1																		
S.1.1	90	35°	0,04	0,03	0,02	0,009	0,05	0,04	0,03	0,013	0,06	0,05	0,04	0,016	0,08	0,06	0,05	0,019
S.1.2	90	35°	0,04	0,03	0,02	0,009	0,05	0,04	0,03	0,013	0,06	0,05	0,04	0,016	0,08	0,06	0,05	0,019
S.2.1	70	35°	0,04	0,03	0,02	0,009	0,05	0,04	0,03	0,013	0,06	0,05	0,04	0,016	0,08	0,06	0,05	0,019
S.2.2	70	35°	0,04	0,03	0,02	0,009	0,05	0,04	0,03	0,013	0,06	0,05	0,04	0,016	0,08	0,06	0,05	0,019
S.2.3																		
S.3.1	135	35°	0,04	0,04	0,03	0,011	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028
S.3.2	105	35°	0,05	0,04	0,03	0,013	0,08	0,06	0,05	0,019	0,09	0,07	0,05	0,022	0,11	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Cutting depth corresponding to the cutting length

Index	52 521 ... Ø DC (mm) = 14				16				18				20				● 1st choice ○ suitable		
	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MQL
	f_z (mm)				f_z (mm)				f_z (mm)				f_z (mm)						
P.1.1	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	0,25	0,20	0,15	0,063	○	●	○
P.1.2	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.1.3	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.1.4	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.1.5	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.2.1	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	0,25	0,20	0,15	0,063	○	●	○
P.2.2	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	0,25	0,20	0,15	0,063	○	●	○
P.2.3	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.2.4	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.3.1	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.3.2	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.3.3	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	○	●	○
P.4.1	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	0,16	0,13	0,10	0,041	0,18	0,14	0,11	0,044	●		
P.4.2	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	0,16	0,13	0,10	0,041	0,18	0,14	0,11	0,044	●		
M.1.1	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	0,16	0,13	0,10	0,041	0,18	0,14	0,11	0,044	●		
M.2.1	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	0,16	0,13	0,10	0,041	0,18	0,14	0,11	0,044	●		
M.3.1	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	0,16	0,13	0,10	0,041	0,18	0,14	0,11	0,044	●		
K.1.1	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	0,25	0,20	0,15	0,063	○	●	○
K.1.2	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	0,25	0,20	0,15	0,063	○	●	○
K.2.1	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	0,25	0,20	0,15	0,063	○	●	○
K.2.2	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	○	●	○
K.3.1	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	○	●	○
K.3.2	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,23	0,18	0,14	0,057	0,24	0,19	0,14	0,060	○	●	○
N.1.1																			
N.1.2																			
N.2.1	0,20	0,16	0,12	0,051	0,23	0,18	0,14	0,057	0,25	0,20	0,15	0,063	0,28	0,22	0,17	0,070	●	●	
N.2.2	0,20	0,16	0,12	0,051	0,23	0,18	0,14	0,057	0,25	0,20	0,15	0,063	0,28	0,22	0,17	0,070	●	●	
N.2.3	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	0,26	0,21	0,16	0,066	●	●	
N.3.1	0,18	0,14	0,11	0,044	0,20	0,16	0,12	0,051	0,23	0,18	0,14	0,057	0,25	0,20	0,15	0,063	●	●	
N.3.2	0,18	0,14	0,11	0,044	0,20	0,16	0,12	0,051	0,23	0,18	0,14	0,057	0,25	0,20	0,15	0,063	●	●	
N.3.3	0,16	0,13	0,10	0,041	0,19	0,15	0,11	0,047	0,21	0,17	0,13	0,054	0,24	0,19	0,14	0,060	●	●	
N.4.1																			
S.1.1	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	●		
S.1.2	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	●		
S.2.1	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	●		
S.2.2	0,10	0,08	0,06	0,025	0,11	0,09	0,07	0,028	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	●		
S.2.3																			
S.3.1	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	●		
S.3.2	0,13	0,10	0,08	0,032	0,14	0,11	0,08	0,035	0,15	0,12	0,09	0,038	0,15	0,12	0,09	0,038	●		
S.3.3																			
H.1.1																			
H.1.2																			
H.1.3																			
H.1.4																			
H.2.1																			
H.3.1																			
O.1.1																			
O.1.2																			
O.2.1																			
O.2.2																			
O.3.1																			

Cutting data standard values – S-Cut UNImax – End mill

Index	Type long		52 522 ..., 52 523 ...															
			Ø DC (mm) =															
			3		4		5		6		8		10		12		14	
			a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC
	v_c (m/min)	$a_{p\,max.}$ x DC	f_z (mm)															
P.1.1	210	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.1.2	200	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.1.3	200	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.1.4	190	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.1.5	190	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.2.1	200	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.2.2	190	2.0	0.020	0.014	0.027	0.019	0.034	0.025	0.042	0.030	0.056	0.040	0.070	0.050	0.084	0.060	0.098	0.070
P.2.3	180	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.2.4	170	2.0	0.020	0.014	0.027	0.019	0.034	0.025	0.042	0.030	0.056	0.040	0.070	0.050	0.084	0.060	0.098	0.070
P.3.1	180	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.3.2	170	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.3.3	140	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
P.4.1	95	1.5	0.012	0.009	0.017	0.012	0.022	0.016	0.027	0.019	0.036	0.026	0.046	0.033	0.056	0.040	0.066	0.047
P.4.2	85	1.5	0.012	0.009	0.017	0.012	0.022	0.016	0.027	0.019	0.036	0.026	0.046	0.033	0.056	0.040	0.066	0.047
M.1.1	95	1.5	0.012	0.009	0.017	0.012	0.022	0.016	0.027	0.019	0.036	0.026	0.046	0.033	0.056	0.040	0.066	0.047
M.2.1	95	1.5	0.012	0.009	0.017	0.012	0.022	0.016	0.027	0.019	0.036	0.026	0.046	0.033	0.056	0.040	0.066	0.047
M.3.1	95	1.5	0.012	0.009	0.017	0.012	0.022	0.016	0.027	0.019	0.036	0.026	0.046	0.033	0.056	0.040	0.066	0.047
K.1.1	200	2.0	0.031	0.022	0.039	0.028	0.048	0.034	0.056	0.040	0.074	0.053	0.091	0.065	0.108	0.077	0.126	0.090
K.1.2	180	2.0	0.031	0.022	0.039	0.028	0.048	0.034	0.056	0.040	0.074	0.053	0.091	0.065	0.108	0.077	0.126	0.090
K.2.1	190	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
K.2.2	170	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
K.3.1	180	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
K.3.2	160	2.0	0.026	0.019	0.034	0.024	0.042	0.030	0.049	0.035	0.066	0.047	0.081	0.058	0.098	0.070	0.113	0.081
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	350	2.0	0.031	0.022	0.039	0.028	0.048	0.034	0.056	0.040	0.074	0.053	0.091	0.065	0.108	0.077	0.126	0.090
N.3.2	350	2.0	0.031	0.022	0.039	0.028	0.048	0.034	0.056	0.040	0.074	0.053	0.091	0.065	0.108	0.077	0.126	0.090
N.3.3	280	2.0	0.031	0.022	0.039	0.028	0.048	0.034	0.056	0.040	0.074	0.053	0.091	0.065	0.108	0.077	0.126	0.090
N.4.1																		
S.1.1																		
S.1.2																		
S.2.1																		
S.2.2																		
S.2.3																		
S.3.1																		
S.3.2																		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Profiling with an a_e < 0.3xDC only possible under certain conditions!

Plunging angle for ramping and helical milling: 3°

Index	52 522 ..., 52 523 ...						● 1st choice ○ suitable		
	Ø DC (mm) =								
	16		18		20				
	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_e 0,3–0,4 x DC	a_e 0,6–1,0 x DC	Emulsion	Compressed air	MQL
	f_z (mm)								
P.1.1	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.1.2	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.1.3	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.1.4	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.1.5	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.2.1	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.2.2	0.105	0.075	0.112	0.080	0.119	0.085	●	○	○
P.2.3	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.2.4	0.105	0.075	0.112	0.080	0.119	0.085	●	○	○
P.3.1	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.3.2	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.3.3	0.121	0.087	0.129	0.092	0.137	0.098	●	○	○
P.4.1	0.071	0.051	0.076	0.054	0.081	0.058	●		
P.4.2	0.071	0.051	0.076	0.054	0.081	0.058	●		
M.1.1	0.071	0.051	0.076	0.054	0.081	0.058	●		
M.2.1	0.071	0.051	0.076	0.054	0.081	0.058	●		
M.3.1	0.071	0.051	0.076	0.054	0.081	0.058	●		
K.1.1	0.134	0.096	0.143	0.102	0.151	0.108	●	●	●
K.1.2	0.134	0.096	0.143	0.102	0.151	0.108	●	●	●
K.2.1	0.121	0.087	0.129	0.092	0.137	0.098	●	●	●
K.2.2	0.121	0.087	0.129	0.092	0.137	0.098	●	●	●
K.3.1	0.121	0.087	0.129	0.092	0.137	0.098	●	●	●
K.3.2	0.121	0.087	0.129	0.092	0.137	0.098	●	●	●
N.1.1									
N.1.2									
N.2.1									
N.2.2									
N.2.3									
N.3.1	0.134	0.096	0.143	0.102	0.151	0.108	●	○	○
N.3.2	0.134	0.096	0.143	0.102	0.151	0.108	●	○	○
N.3.3	0.134	0.096	0.143	0.102	0.151	0.108	●	○	○
N.4.1									
S.1.1									
S.1.2									
S.2.1									
S.2.2									
S.2.3									
S.3.1									
S.3.2									
S.3.3									
H.1.1									
H.1.2									
H.1.3									
H.1.4									
H.2.1									
H.3.1									
O.1.1									
O.1.2									
O.2.1									
O.2.2									
O.3.1									

ENGINEERS FIRST AND FOREMOST.

JUST OUR THING

TECHNICAL SUPPORT.
WHEN YOU NEED IT MOST.

OUR WAREHOUSE IN YOUR MACHINE SHOP.

www.just-our-thing.com

THE Cutting Tool Solution

CERATIZIT GROUP

10/2024 – 99 122 00268