07\2021

NEW DEVELOPMENTS AND PRODUCT ENHANCEMENTS

UP2DATE



COOL MACHINING RESULTS

Tool Holders with the DirectCooling (DC) System from CERATIZIT

... AND A SOME MORE PRODUCTS

- WTX – Micro: the drill for the Use in micro dimensions
- Centering vice ZSG mini: Clamp small parts with 16 kN

TEAM CUTTING TOOLS

CUTTING SOLUTIONS BY CERATIZIT · KOMET · WNT · KLENK

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling the Future

www.ceratizit.com

Welcome!



It couldn’t be easier

Ordering via the Online Shop

http://cuttingtools.ceratizit.com



On-site technical support

Your Local Technical Sales Engineer

Your customer number

Tool Holders with DirectCooling (DC)

Targeted coolant application on the cutting edge

CUTTING SOLUTIONS BY CERATIZIT

Targeted action is half the battle

Machining without cutting fluids? It's hard to imagine in many cases because they are so efficient at cooling, lubricating and evacuating chips. But CERATIZIT has an even better alternative in the form of its DirectCooling system: two nozzles in the holder apply the coolant directly on the cutting edge – for cool machining results! Whereas a hose applies coolant liberally to the cutting area, the DirectCooling (DC) system from CERATIZIT works in a different way. Tool holders with DirectCooling (DC) are equipped with two inner holes that guide the coolant to where it has the greatest impact: directly on the cutting edge. Why is this so important? Targeted cooling improves both the service life and general process security.


Direct **DC** Cooling

- Fewer trapped chips
- Reduced wear
- Universal application

Advantage/benefit

The lengths of all CERATIZIT DirectCooling holders are ideally matched to one another. As a result...

- Interference contours are eliminated
- A compact complete package is created
- Optimum stability is reached
- Unlimited flexibility is achieved

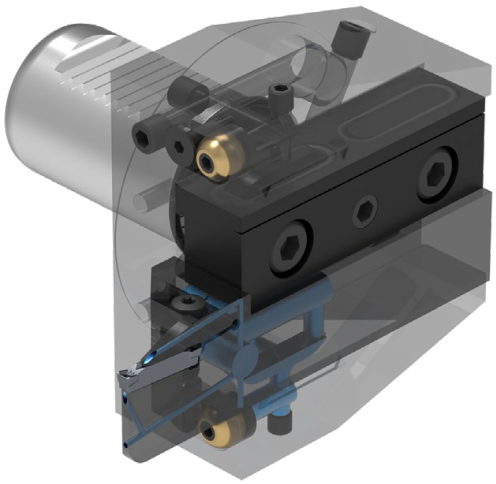


The DirectCooling system from CERATIZIT optimises cooling lubrication: two coolant holes trained on the cutting edge ensure efficient cooling, lubrication and chip evacuation.

cuttingtools.ceratizit.com/ie/en/direct-cooling

MonoClamp – GX-DC Grooving Holder

Two nozzles for the ultimate cooling effect

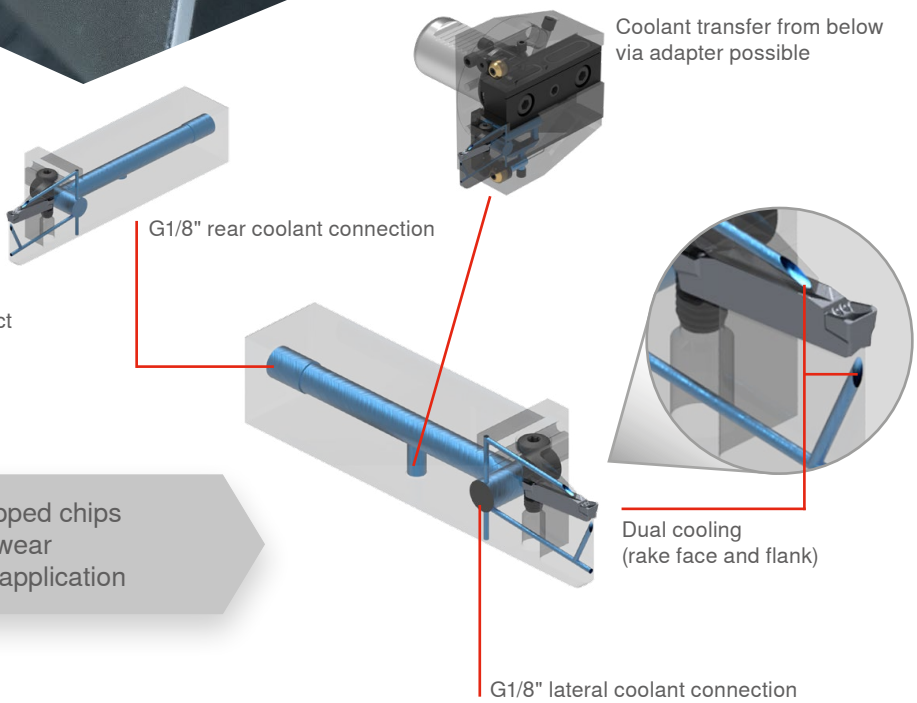

CUTTING SOLUTIONS BY CERATIZIT

Further information on the product can be found on → Page 30–34

Direct **DC** Cooling

- Fewer trapped chips
- Reduced wear
- Universal application

Features

- The new MonoClamp GX-DC tool holders play to their strengths particularly when faced with deep grooves, using a high flow volume to reliably flush out any chips.
- The revamped insert seat clamps the grooving insert in the insert holder with even greater stability.
- Better handling: to simplify the process of changing inserts, the insert clamping screw can be turned from both above and below, depending on which is easier to access.

> So, in terms of transfer, instead of emptying a bucketful into the machining zone, we target the cutting edges precisely.
>
> CERATIZIT Product Manager, Paul Höckberg


VDI Adapter – DC

Universal, versatile and with targeted cooling

Universal VDI holder with targeted cooling

- The VDI holder with DirectCooling is incredibly versatile owing to its 4-in-1 functionality.
- Thanks to its double tooth profile, only one holder is needed.
- Optional extra: the clamping rails can be attached at the top or bottom

Cool type: VDI holder with 4-in-1 functionality

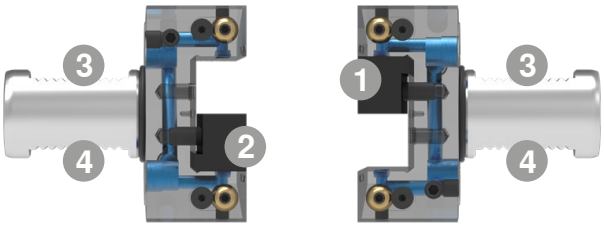


1. Top clamping rail
2. Bottom clamping rail
3. Top tooth profile (normal application)
4. Bottom tooth profile (overhead application)

Direct **DC** Cooling

- Fewer trapped chips
- Reduced wear
- Universal application

Further information on the product c an be found on → Page 70–75

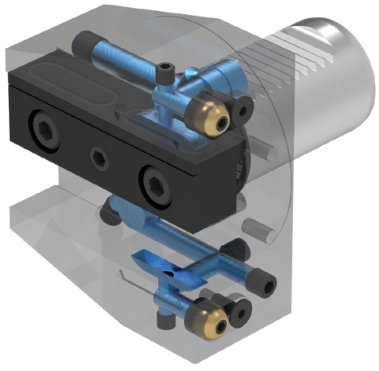

VDI square adapters – DC



WTX – Micro

Drill for use in micro dimensions.
Hole depths up to 30xD can be achieved in the accustomed high WTX Performance drilling quality.

cuttingtools.ceratizit.com/ie/en/wtx-micro

Specialists in micro tools for universal application

The new drill series from the CERATIZIT Group's Team Cutting Tools might sound like a complete contradiction, but the WTX Micro from the WNT Performance range is both the specialist for micro and deep hole drilling and suitable for universal use – it is anything but choosy when it comes to materials. This means it can be used for many different applications in a diverse range of industries.

> Whether it is steel, cast iron materials or heat-resistant materials/ alloys, our WTX Micro can take on anything!

CERATIZIT Product Manager, Felix Meggle

Reliable processes thanks to optimised geometry and tough coating

Advantage/benefit

- **Special drill point**
  guarantees maximum positioning accuracy and outstanding centring properties
- **Lapped surfaces and patented chip space openings**
  allow for rapid and reliable chip removal
- **Innovative Dragonskin DPX74-M**
  makes the WTX Micro resistant to heat and wear
- **Spiral coolant holes and a Power chamber along the whole shank length**
  ensure optimum cooling of the cutting edges, significantly extending tool life
- **Process security and tight tolerances**
  are the priority in the performance specification – and the WTX Micro has been successfully engineered for this very purpose
- **Ultra-fine grain carbide from CERATIZIT**
  ensures consistently outstanding tool quality



The WTX Micro drills are equipped with the innovative DPX74-M coating to make them even more resistant against wear and heat.



The WTX Micro comes in diameters ranging from 0.8 to 2.90 mm and lengths of 5xD, 8xD, 12xD, 16xD and 20xD. The WTX Micro deep hole drills are available in the 1.00 mm to 2.90 mm range in lengths of 25xD and 30xD.

Further information on the product can be found on → Page 12–19



ZSG mini

Clamp small parts with 16 kN

Further information on the product can be found on → Page 90–94

Small, strong, robust – the ZSG mini packs a punch!

Extremely small but incredibly strong. The ZSG mini from the WNT Performance range is the ideal partner for clamping small workpieces.
Once you have used it, you will never want to be without it again: centric vices are little helpers that often make day-to-day machining activities much easier. To allow particularly small and delicate workpieces to also enjoy these benefits, CERATIZIT is adding the ZSG mini centric vice for small parts to its portfolio.

Extremely easy handling with quick jaw change!



The jaws can be replaced in a matter of seconds without any tools at all by extracting them at an angle through the centre. The integrated pull-down action via two spring pressure pins means that the jaws sit securely in the base body, ensuring total machining precision and robust connections.


Advantage/benefit

1 Optimum accessibility

Quick and straightforward handling significantly reduces setup times. The ZSG mini can be easily accessed from all sides, making it ideal for the machining of blanks and finished parts, multi-clamping and automated applications.

2 Large clamping range – grip or smooth step

The centric vices for small parts are available in lengths of 80 mm and 100 mm with quick change jaws in widths of 45 mm and 70 mm – all case-hardened to between 54 and 56 HRC, with smooth step and grip variants.

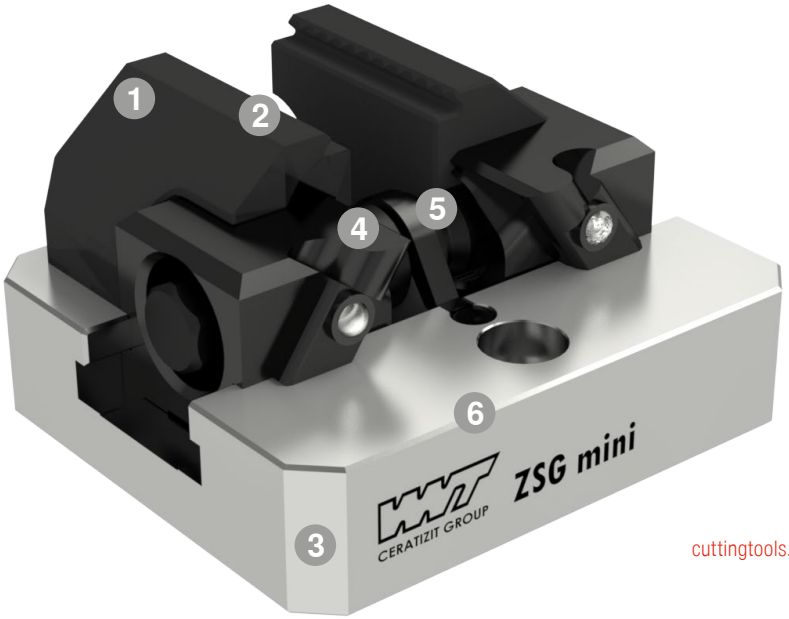

cuttingtools.ceratizit.com/ie/en/zsg-mini

3 Stainless, hardened base body

The stainless base body that is hardened to 45 HRC promises a long and reliable service life for the clamping system.

4 Fast jaw changeover without tools

The quick change system means the jaws can be changed in seconds without any tools at all.

5 High clamping force

Instead of complex pre-stamping, the ZSG mini delivers very high clamping forces of 16 kN with 50 Nm: clamp, lock, go!

6 Compact Design

The ZSG mini is suitable for a 4-axis and 5-axis indexing head and can be integrated directly in or on the pallet.



Table of Contents

Solid Carbide Drilling

12–19 **WTX – Micro deep hole drilling**

KOMET Indexable Insert Drills

20–23 SOGX high feed indexable inserts

KOMET Spindle Tooling

24–27 Hi.Flex Digital

CERATIZIT Turning Tools

28+29 Base holder for replaceable head system (HSK-T) – vibration dampened



Grooving Tools

30–34 **MonoClamp – GX-DC grooving holder**

Solid Carbide Milling Cutters

36–47 Extension of the micro milling cutter

48–59 Extension of the SilverLine

Adapters

60–65 ER precision collet chucks – Heavy Duty Chuck (HDC)

65 HSK-T extension

66–68 Hydraulic chuck, short and stable version

70–75 **VDI adapter – DC**

76–88 BMT-Holder


Vices

90–94 **ZSG mini**

Continue to the product pages

WTX – High Performance Drills

- Specialised micro drill
- Universal application
- Extremely high process security
- Pilot drill for WTX Micro – high-performance deep hole drill




NEW

MICRO

DPX74M

DRAGONSKIN





Solid carbide

10 693 ...


DC m6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
0,8	3	39	5,6	4,0	105,60	00800
0,9	3	39	6,3	4,5	105,60	00900
1,0	3	40	7,0	5,0	93,75	01000
1,1	3	41	7,7	5,5	93,75	01100
1,2	3	41	8,4	6,0	93,75	01200
1,3	3	42	9,1	6,5	93,75	01300
1,4	3	42	9,8	7,0	93,75	01400
1,5	3	43	10,5	7,5	93,75	01500
1,6	3	44	11,2	8,0	98,69	01600
1,7	3	44	11,9	8,5	98,69	01700
1,8	3	45	12,6	9,0	98,69	01800
1,9	3	45	13,3	9,5	98,69	01900
2,0	3	46	14,0	10,0	98,69	02000
2,1	3	47	14,7	10,5	101,80	02100
2,2	3	47	15,4	11,0	101,80	02200
2,3	3	48	16,1	11,5	101,80	02300
2,4	3	48	16,8	12,0	101,80	02400
2,5	3	49	17,5	12,5	101,80	02500
2,6	3	50	18,2	13,0	107,10	02600
2,7	3	50	18,9	13,5	107,10	02700
2,8	3	51	19,6	14,0	107,10	02800
2,9	3	51	20,3	14,5	107,10	02900

P	●
M	●
K	●
N	
S	o
H	
O	

Minimum coolant pressure: 30 bar

WTX – High Performance Drills

- Specialised micro drill
- Universal application
- Extremely high process security




NEW

MICRO

DPX74M

DRAGONSKIN





Solid carbide

10 694 ...


DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
0,8	3	41	8	6,4	110,80	00800
0,9	3	42	9	7,2	110,80	00900
1,0	3	43	10	8,0	98,88	01000
1,1	3	44	11	8,8	98,88	01100
1,2	3	45	12	9,6	98,88	01200
1,3	3	46	13	10,4	98,88	01300
1,4	3	47	14	11,2	98,88	01400
1,5	3	47	15	12,0	98,88	01500
1,6	3	48	16	12,8	106,40	01600
1,7	3	49	17	13,6	106,40	01700
1,8	3	50	18	14,4	106,40	01800
1,9	3	51	19	15,2	106,40	01900
2,0	3	52	20	16,0	106,40	02000
2,1	3	53	21	16,8	108,10	02100
2,2	3	54	22	17,6	108,10	02200
2,3	3	55	23	18,4	108,10	02300
2,4	3	56	24	19,2	108,10	02400
2,5	3	56	25	20,0	108,10	02500
2,6	3	57	26	20,8	111,50	02600
2,7	3	58	27	21,6	111,50	02700
2,8	3	59	28	22,4	111,50	02800
2,9	3	60	29	23,2	111,50	02900

P	●
M	●
K	●
N	
S	o
H	
O	


Minimum coolant pressure: 30 bar

WTX – High Performance Drills

- Specialised micro drill
- Universal application
- Extremely high process security
- Pilot drill: 5xD WTX Micro – high-performance drill



NEW
MICRO
DPX74M
DRAGONSKIN

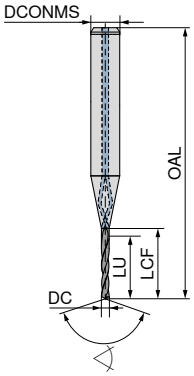



Solid carbide

10 695 ...


DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
0,8	3	44	11,2	9,6	123,40	00800
0,9	3	46	12,6	10,8	123,40	00900
1,0	3	47	14,0	12,0	111,50	01000
1,1	3	48	15,4	13,2	111,50	01100
1,2	3	50	16,8	14,4	111,50	01200
1,3	3	51	18,2	15,6	111,50	01300
1,4	3	52	19,6	16,8	111,50	01400
1,5	3	53	21,0	18,0	111,50	01500
1,6	3	55	22,4	19,2	117,40	01600
1,7	3	56	23,8	20,4	117,40	01700
1,8	3	57	25,2	21,6	117,40	01800
1,9	3	59	26,6	22,8	117,40	01900
2,0	3	60	28,0	24,0	117,40	02000
2,1	3	61	29,4	25,2	120,00	02100
2,2	3	63	30,8	26,4	120,00	02200
2,3	3	64	32,2	27,6	120,00	02300
2,4	3	65	33,6	28,8	120,00	02400
2,5	3	67	35,0	30,0	120,00	02500
2,6	3	68	36,4	31,2	122,50	02600
2,7	3	69	37,8	32,4	122,50	02700
2,8	3	70	39,2	33,6	122,50	02800
2,9	3	72	40,6	34,8	122,50	02900

P	●
M	●
K	●
N	
S	o
H	
O	


Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- Specialised micro deep hole drill
- Universal application
- Extremely high process security
- Pilot drill: 5xD WTX Micro – high-performance drill



NEW
MICRO
DPX74M
DRAGONSKIN

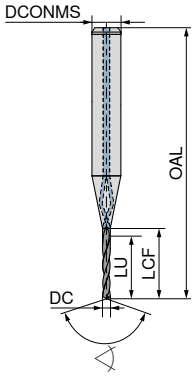



Solid carbide

10 696 ...


DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
0,8	3	48	14,4	12,8	156,90	00800
0,9	3	49	16,2	14,4	156,90	00900
1,0	3	51	18,0	16,0	145,00	01000
1,1	3	53	19,8	17,6	145,00	01100
1,2	3	54	21,6	19,2	145,00	01200
1,3	3	56	23,4	20,8	145,00	01300
1,4	3	58	25,2	22,4	145,00	01400
1,5	3	60	27,0	24,0	145,00	01500
1,6	3	61	28,8	25,6	152,70	01600
1,7	3	63	30,6	27,2	152,70	01700
1,8	3	65	32,4	28,8	152,70	01800
1,9	3	66	34,2	30,4	152,70	01900
2,0	3	68	36,0	32,0	152,70	02000
2,1	3	70	37,8	33,6	155,90	02100
2,2	3	71	39,6	35,2	155,90	02200
2,3	3	73	41,4	36,8	155,90	02300
2,4	3	75	43,2	38,4	155,90	02400
2,5	3	77	45,0	40,0	155,90	02500
2,6	3	78	46,8	41,6	159,30	02600
2,7	3	80	48,6	43,2	159,30	02700
2,8	3	82	50,4	44,8	159,30	02800
2,9	3	83	52,2	46,4	159,30	02900

P	●
M	●
K	●
N	
S	
H	
O	

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- Specialised micro deep hole drill
- Universal application
- Extremely high process security
- Pilot drill: 5xD WTX Micro – high-performance drill




NEW

MICRO

DPX74M

DRAGONSKIN

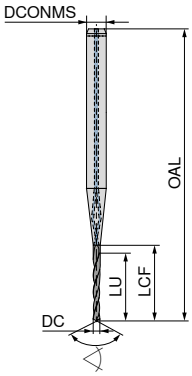



Solid carbide

10 697 ...


DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
0,8	3	51	17,6	16	172,40	00800
0,9	3	53	19,8	18	172,40	00900
1,0	3	55	22,0	20	160,60	01000
1,1	3	57	24,2	22	160,60	01100
1,2	3	59	26,4	24	160,60	01200
1,3	3	61	28,6	26	160,60	01300
1,4	3	63	30,8	28	160,60	01400
1,5	3	66	33,0	30	160,60	01500
1,6	3	68	35,2	32	169,10	01600
1,7	3	70	37,4	34	169,10	01700
1,8	3	72	39,6	36	169,10	01800
1,9	3	74	41,8	38	169,10	01900
2,0	3	76	44,0	40	169,10	02000
2,1	3	78	46,2	42	172,60	02100
2,2	3	80	48,4	44	172,60	02200
2,3	3	82	50,6	46	172,60	02300
2,4	3	85	52,8	48	172,60	02400
2,5	3	87	55,0	50	172,60	02500
2,6	3	89	57,2	52	176,40	02600
2,7	3	91	59,4	54	176,40	02700
2,8	3	93	61,6	56	176,40	02800
2,9	3	95	63,8	58	176,40	02900

P	●
M	●
K	●
N	
S	
H	
O	

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- Specialised micro deep hole drill
- Universal application
- Extremely high process security
- Pilot drill: 5xD WTX Micro – high-performance drill




NEW

MICRO

DPX74M

DRAGONSKIN

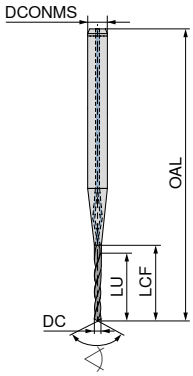



Solid carbide

10 698 ...


DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
1,0	3	60	27,0	25,0	177,70	01000
1,1	3	63	29,7	27,5	177,70	01100
1,2	3	65	32,4	30,0	177,70	01200
1,3	3	68	35,1	32,5	177,70	01300
1,4	3	71	37,8	35,0	177,70	01400
1,5	3	73	40,5	37,5	177,70	01500
1,6	3	76	43,2	40,0	187,10	01600
1,7	3	78	45,9	42,5	187,10	01700
1,8	3	81	48,6	45,0	187,10	01800
1,9	3	84	51,3	47,5	187,10	01900
2,0	3	86	54,0	50,0	187,10	02000
2,1	3	89	56,7	52,5	191,10	02100
2,2	3	91	59,4	55,0	191,10	02200
2,3	3	94	62,1	57,5	191,10	02300
2,4	3	97	64,8	60,0	191,10	02400
2,5	3	99	67,5	62,5	191,10	02500
2,6	3	102	70,2	65,0	195,20	02600
2,7	3	104	72,9	67,5	195,20	02700
2,8	3	107	75,6	70,0	195,20	02800
2,9	3	110	78,3	72,5	195,20	02900

P	●
M	●
K	●
N	
S	
H	
O	

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- Specialised micro deep hole drill
- Universal application
- Extremely high process security
- Pilot drill: 5xD WTX Micro – high-performance drill




NEW

MICRO

DPX74M

DRAGONSKIN

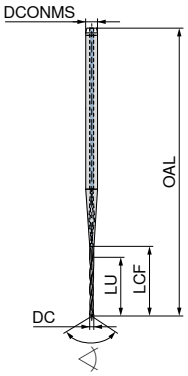



Solid carbide

10 699 ...

DC h6 mm	DCONMS h6 mm	OAL mm	LCF mm	LU mm	EUR T4	
1,0	3	65	32,0	30	196,70	01000
1,1	3	68	35,2	33	196,70	01100
1,2	3	71	38,4	36	196,70	01200
1,3	3	74	41,6	39	196,70	01300
1,4	3	78	44,8	42	196,70	01400
1,5	3	81	48,0	45	196,70	01500
1,6	3	84	51,2	48	207,20	01600
1,7	3	87	54,4	51	207,20	01700
1,8	3	90	57,6	54	207,20	01800
1,9	3	93	60,8	57	207,20	01900
2,0	3	96	64,0	60	207,20	02000
2,1	3	99	67,2	63	211,60	02100
2,2	3	102	70,4	66	211,60	02200
2,3	3	106	73,6	69	211,60	02300
2,4	3	109	76,8	72	211,60	02400
2,5	3	112	80,0	75	211,60	02500
2,6	3	115	83,2	78	216,10	02600
2,7	3	118	86,4	81	216,10	02700
2,8	3	121	89,6	84	216,10	02800
2,9	3	124	92,8	87	216,10	02900

P	●
M	●
K	●
N	
S	
H	
O	

Minimum coolant pressure: 30 bar

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – WTX – Micro

Index	Drilling depth 5xD Micro 10 693 ...							
	v_c m/min with through coolant	v_c m/min MMS	< Ø 1,0	> Ø 1,0–1,25	> Ø 1,25–1,5	> Ø 1,5–2,0	> Ø 2,0–2,5	> Ø 2,5–3,0
			f mm/rev.	f mm/rev.	f mm/rev.	f mm/rev.	f mm/rev.	f mm/rev.
P.1.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.2	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.3	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.4	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.5	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.2	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.3	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.4								
P.3.1	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095
P.3.2	**40**	**35**	0,024	0,028	0,034	0,05	0,07	0,095
P.3.3								
P.4.1	**40**		0,012	0,015	0,018	0,028	0,04	0,06
P.4.2	**25**		0,012	0,015	0,018	0,028	0,04	0,06
M.1.1	**30**		0,012	0,015	0,018	0,028	0,04	0,06
M.2.1	**30**		0,012	0,015	0,018	0,028	0,04	0,06
M.3.1	**30**		0,012	0,015	0,018	0,028	0,04	0,06
K.1.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.1.2	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.2.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.2.2	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.3.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.3.2	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095
N.1.1								
N.1.2								
N.2.1								
N.2.2								
N.2.3								
N.3.1								
N.3.2								
N.3.3								
N.4.1								
S.1.1	15		0,012	0,015	0,018	0,028	0,04	0,06
S.1.2	15		0,012	0,015	0,018	0,028	0,04	0,06
S.2.1	10		0,012	0,015	0,018	0,028	0,04	0,06
S.2.2	10		0,012	0,015	0,018	0,028	0,04	0,06
S.2.3								
S.3.1	20		0,012	0,015	0,018	0,028	0,04	0,06
S.3.2	10		0,012	0,015	0,018	0,028	0,04	0,06
S.3.3								
H.1.1								
H.1.2								
H.1.3								
H.1.4								
H.2.1								
H.3.1								
O.1.1								
O.1.2								
O.2.1								
O.2.2								
O.3.1								

The cutting data depends extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced according to the application conditions.

Cutting data standard values – WTX – Micro

Index	Hole depth 8xD / 12xD Micro 10 694 ..., 10 695 ...								Hole depth 16xD / 20xD / 25xD / 30xD Micro 10 696 ..., 10 697 ..., 10 698 ..., 10 699 ...						
	v_c m/min with through coolant	v_c m/min MMS	< Ø 1,0 f mm/rev.	> Ø 1,0–1,25 f mm/rev.	> Ø 1,25–1,5 f mm/rev.	> Ø 1,5–2,0 f mm/rev.	> Ø 2,0–2,5 f mm/rev.	> Ø 2,5–3,0 f mm/rev.	v_c m/min with through coolant	< Ø 1,0 f mm/rev.	> Ø 1,0–1,25 f mm/rev.	> Ø 1,25–1,5 f mm/rev.	> Ø 1,5–2,0 f mm/rev.	> Ø 2,0–2,5 f mm/rev.	> Ø 2,5–3,0 f mm/rev.
P.1.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.2	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.3	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.4	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.1.5	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.2	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.3	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.2.4															
P.3.1	**50**	**45**	0,024	0,028	0,034	0,05	0,07	0,095	**40**	0,024	0,028	0,034	0,05	0,07	0,095
P.3.2	**40**	**35**	0,024	0,028	0,034	0,05	0,07	0,095	**30**	0,024	0,028	0,034	0,05	0,07	0,095
P.3.3															
P.4.1	**40**		0,012	0,015	0,018	0,028	0,04	0,06	**30**	0,012	0,015	0,018	0,028	0,04	0,06
P.4.2	**25**		0,012	0,015	0,018	0,028	0,04	0,06	**20**	0,012	0,015	0,018	0,028	0,04	0,06
M.1.1	**30**		0,012	0,015	0,018	0,028	0,04	0,06	**25**	0,012	0,015	0,018	0,028	0,04	0,06
M.2.1	**30**		0,012	0,015	0,018	0,028	0,04	0,06	**25**	0,012	0,015	0,018	0,028	0,04	0,06
M.3.1	**30**		0,012	0,015	0,018	0,028	0,04	0,06	**25**	0,012	0,015	0,018	0,028	0,04	0,06
K.1.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.1.2	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.2.1	**60**	**05**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.2.2	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.3.1	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
K.3.2	**60**	**50**	0,024	0,028	0,034	0,05	0,07	0,095	**50**	0,024	0,028	0,034	0,05	0,07	0,095
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1															
N.3.2															
N.3.3															
N.4.1															
S.1.1	15		0,012	0,015	0,018	0,028	0,04	0,06							
S.1.2	15		0,012	0,015	0,018	0,028	0,04	0,06							
S.2.1	10		0,012	0,015	0,018	0,028	0,04	0,06							
S.2.2	10		0,012	0,015	0,018	0,028	0,04	0,06							
S.2.3															
S.3.1	20		0,012	0,015	0,018	0,028	0,04	0,06							
S.3.2	10		0,012	0,015	0,018	0,028	0,04	0,06							
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

The cutting data depends extremely on the external conditions, the material and machine type. The indicated values are possible values which have to be increased or reduced according to the application conditions.

WTX – Micro – recommended application

General references

- During vertical machining, a pilot hole is not required for regular and straight surfaces from Ø 1.0 mm up to a length of 12xD due to the excellent self-centring. During horizontal drilling, a pilot drill must be used for irregular and angled surfaces.
  The WTX Micro 5xD is recommended as a pilot drill.
- To guarantee problem-free insertion of the deep hole twist drill in the pilot hole, during horizontal machining 90° countersinking with suitable NC countersink is recommended.
- During vertical machining, drills from Ø 1.0 mm up to a length of 12xD can also be operated outside the pilot hole without a reduction in speed.
- For through holes, the feed per revolution must be reduced by 50% before exiting the hole.
- For long-chipping materials, pecking may be required every 3xD from a hole depth of 10xD. Peck drilling (retraction) should occur at the pilot hole depth.
- Due to the small thro' coolant Ø during micro drilling, effective filtration of the cooling medium is of the utmost importance.
  Drill < Ø 2.0 mm Filter ≤ 0.010 mm
  Drill < Ø 3.0 mm Filter ≤ 0.020 mm
- The longer the coolant is in the machine, suspended particles and particulate matter in the cooling medium prevent effective coolant flow. Regular replacement of the coolant is therefore recommended.
- A suitable clamping device with maximum radial run-out accuracy and balance quality is required for process-secure production.
  Radial run-out accuracy ≤ 0.003 mm
  Suitable for high-speed areas
- To guarantee a process-secure drilling process, a minimum pressure of 30 bar must be present.

1 Producing the pilot hole



- Pilot hole depth: min. 3xD
- It must be ensured that the prepared pilot hole is free from chips to avoid blocking of the micro deep hole twist drill cutting edges

2 Entering the pilot hole with a deep hole twist drill



- Speed 300 rpm (reverse rotation sometimes possible)
- Entry speed approx. 1000 mm/min
- Switch on cooling
- Increase parameters 0.5-1.0 mm before reaching the bottom of the pilot hole

3 Deep hole drilling




- At hole depth without pecking

4 Retracting the drill




- Retract drill approx. 1xD
- Reduce speed to 300 rpm
- Exit speed approx. 1000 mm/min
- Switch off emulsion before exiting the hole

Tolerances and angles

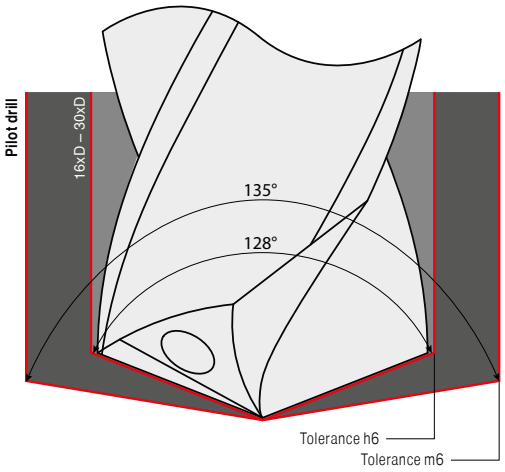


The following must apply to use the pilot and deep hole twist drill consecutively and without collisions:
ΔD = ØD (pilot hole) – ØD (deep hole) > 0

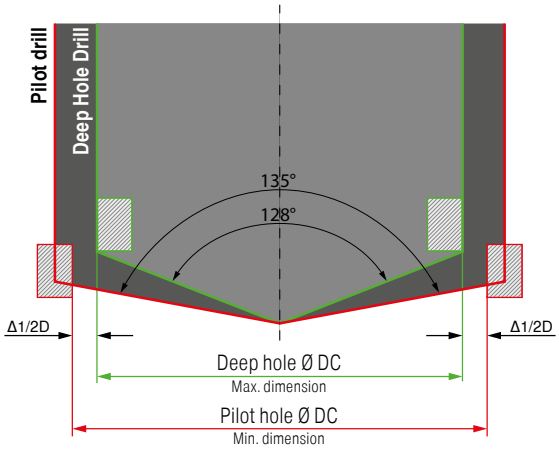

SOGX

Designation	L mm	IC mm	D1 mm	S mm
SOGX 0402..	4,8	4,8	2,05	2,20
SOGX 0502..	5,5	5,5	2,30	2,40
SOGX 0602..	6,2	6,2	2,60	2,75
SOGX 07T2..	7,1	7,1	2,60	2,97
SOGX 0803..	8,0	8,0	2,85	3,40
SOGX 09T3..	8,9	8,9	3,40	3,90
SOGX 1004..	9,8	9,8	4,10	4,20
SOGX 1104..	10,9	10,9	4,10	4,50
SOGX 1204..	12,0	12,0	5,20	4,80
SOGX 1305..	13,2	13,2	5,20	5,20



SOGX

NEW -13 BK8425 | NEW -32 BK8425 | NEW -34 BK8425



SOGX | SOGX | SOGX

ISO	KOMET no.	RE mm	10 820 ... EUR 1A/3#		10 820 ... EUR 1A/3#		10 820 ... EUR 1A/3#	
040204	W80 10130.048425	0,4	16,93	30413				
040204	W80 10320.048425	0,4			18,81	30432		
040204	W80 10340.048425	0,4					18,81	30434
050204	W80 12130.048425	0,4	17,03	30513				
050204	W80 12320.048425	0,4			18,92	30532		
050204	W80 12340.048425	0,4					18,92	30534
060206	W80 18130.068425	0,6	17,15	30613				
060206	W80 18320.068425	0,6			19,05	30632		
060206	W80 18340.068425	0,6					19,05	30634
07T208	W80 20130.088425	0,8	17,25	30713				
07T208	W80 20320.088425	0,8			19,17	30732		
07T208	W80 20340.088425	0,8					19,17	30734
080308	W80 24130.088425	0,8	17,37	30813				
080308	W80 24320.088425	0,8			19,30	30832		
080308	W80 24340.088425	0,8					19,30	30834
09T308	W80 28130.088425	0,8	18,02	30913				
09T308	W80 28320.088425	0,8			20,02	30932		
09T308	W80 28340.088425	0,8					20,02	30934
100408	W80 32130.088425	0,8	18,56	31013				
100408	W80 32320.088425	0,8			20,62	31032		
100408	W80 32340.088425	0,8					20,62	31034
110408	W80 38130.088425	0,8	19,11	31113				
110408	W80 38320.088425	0,8			21,23	31132		
110408	W80 38340.088425	0,8					21,23	31134
120408	W80 42130.088425	0,8	20,10	31213				
120408	W80 42320.088425	0,8			22,33	31232		
120408	W80 42340.088425	0,8					22,33	31234
130508	W80 46130.088425	0,8	23,37	31313				
130508	W80 46320.088425	0,8			25,97	31332		
130508	W80 46340.088425	0,8					25,97	31334
P			●		●		○	
M			●		●			
K			●		●		●	
N			○		○			
S			●		●			
H			○		○			
O								

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values for SOGX indexable inserts – topography -13 / -32

	KUB Pentron + KUB Pentron CS ABS / PSC / C														
Index	-13 / -32 BK8425	Ø 14–15,5 mm	Ø 16–17,5 mm	Ø 18–19,5 mm	Ø 20–21,5 mm	Ø 22–23,5 mm	Ø 24–25,5 mm	Ø 26–27,5 mm	Ø 28–30 mm	Ø 31–33 mm	Ø 34–37 mm	Ø 38–42 mm	Ø 43–46 mm	Ø 46–52 mm	Ø 53–65 mm
	v_c m/min	f in mm/rev.													
P.1.1	**260**	0,08	0,08	0,09	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
P.1.2	**260**	0,10	0,13	0,13	0,15	0,16	0,15	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.1.3	**270**	0,08	0,12	0,12	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,16	0,16
P.1.4	**250**	0,08	0,11	0,11	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,14	0,14
P.1.5	**270**	0,09	0,12	0,12	0,14	0,14	0,14	0,16	0,16	0,16	0,16	0,16	0,16	0,16	0,16
P.2.1	**270**	0,08	0,12	0,12	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,16	0,16
P.2.2	**260**	0,08	0,11	0,11	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,14	0,14
P.2.3	**180**	0.12	0,14	0,16	0,16	0,16	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.2.4	**150**	0.10	0,11	0,13	0,13	0,13	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
P.3.1	**160**	0,08	0,12	0,12	0,16	0,16	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18
P.3.2	**130**	0,07	0,10	0,10	0,13	0,13	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
P.3.3	**120**	0,06	0,08	0,08	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
P.4.1	**180**	0,09	0,13	0,13	0,18	0,18	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20
P.4.2	**130**	0,07	0,10	0,10	0,13	0,13	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.1.1	**150**	0,10	0,10	0,12	0,14	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,16	0,16
M.2.1	**150**	0,10	0,08	0,08	0,11	0,11	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
M.3.1	**140**	0,09	0,07	0,07	0,10	0,10	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13
K.1.1	**160**	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25
K.1.2	**120**	0,09	0,11	0,11	0,14	0,14	0,17	0,19	0,19	0,19	0,19	0,19	0,19	0,19	0,19
K.2.1	**160**	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25
K.2.2	**100**	0,10	0,12	0,12	0,14	0,14	0,18	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20
K.3.1	**120**	0,12	0,15	0,15	0,18	0,18	0,22	0,25	0,25	0,25	0,25	0,25	0,25	0,25	0,25
K.3.2	**100**	0,10	0,12	0,12	0,14	0,14	0,18	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,20
N.1.1	400	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,14	0,14
N.1.2	400	0,10	0,11	0,11	0,11	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,13	0,14	0,14
N.2.1	250	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,18	0,18
N.2.2	250	0,10	0,13	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,18	0,18
N.2.3	230	0,09	0,12	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,16	0,16
N.3.1	200	0,10	0,12	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,16	0,16
N.3.2	220	0,11	0,13	0,14	0,14	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,18	0,18
N.3.3	330	0,11	0,12	0,12	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,18	0,18
N.4.1	200	0,10	0,12	0,13	0,13	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,16	0,16
S.1.1	**60**	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.1.2	**50**	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.1	**60**	0,03	0,03	0,03	0,03	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.2	**50**	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
S.2.3	**30**	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
S.3.1	**100**	0,05	0,05	0,05	0,05	0,06	0,08	0,10	0,10	0,10	0,10	0,10	0,10	0,10	0,10
S.3.2	**80**	0,04	0,04	0,04	0,04	0,05	0,07	0,09	0,09	0,09	0,09	0,09	0,09	0,09	0,09
S.3.3	**50**	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
H.1.1	100	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06
H.1.2	80	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.3	50	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
H.1.4															
H.2.1	100	0,04	0,04	0,04	0,04	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05
H.3.1	80	0,03	0,03	0,03	0,03	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed. A safety guard has to be provided as protection.

Cutting data standard values for SOGX indexable inserts – topography -34


Index	KUB Pentron + KUB Pentron CS ABS / PSC / C													
	-34 BK8425	Ø 14–15,5 mm	Ø 16–17,5 mm	Ø 18–19,5 mm	Ø 20–21,5 mm	Ø 22–23,5 mm	Ø 24–25,5 mm	Ø 26–27,5 mm	Ø 28–30 mm	Ø 31–33 mm	Ø 34–37 mm	Ø 38–42 mm	Ø 43–46 mm	Ø 46–52 mm	Ø 53–65 mm
	v_c m/min	f in mm/rev.													
P.1.1															
P.1.2	260	0,17	0,20	0,20	0,23	0,23	0,23	0,27	0,27	0,27	0,27	0,27	0,27	0,23	0,27
P.1.3															
P.1.4															
P.1.5	270	0,17	0,20	0,20	0,23	0,23	0,23	0,27	0,27	0,27	0,27	0,27	0,27	0,23	0,27
P.2.1															
P.2.2															
P.2.3	180	0,18	0,21	0,24	0,24	0,24	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27
P.2.4	150	0,17	0,2	0,23	0,23	0,23	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26
P.3.1	160	0,12	0,18	0,18	0,24	0,24	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27	0,27
P.3.2	130	0,11	0,17	0,17	0,23	0,23	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26
P.3.3	120	0,11	0,17	0,17	0,23	0,23	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26	0,26
P.4.1															
P.4.2															
M.1.1															
M.2.1															
M.3.1															
K.1.1	160	0,18	0,23	0,23	0,27	0,27	0,33	0,38	0,38	0,38	0,38	0,38	0,38	0,33	0,38
K.1.2	120	0,14	0,18	0,18	0,22	0,22	0,26	0,30	0,30	0,30	0,30	0,30	0,30	0,26	0,30
K.2.1	160	0,18	0,23	0,23	0,27	0,27	0,33	0,38	0,38	0,38	0,38	0,38	0,38	0,33	0,38
K.2.2	100	0,14	0,18	0,18	0,22	0,22	0,26	0,30	0,30	0,30	0,30	0,30	0,30	0,26	0,30
K.3.1	120	0,18	0,23	0,23	0,27	0,27	0,33	0,38	0,38	0,38	0,38	0,38	0,38	0,33	0,38
K.3.2	100	0,14	0,18	0,18	0,22	0,22	0,26	0,30	0,30	0,30	0,30	0,30	0,30	0,26	0,30
N.1.1															
N.1.2															
N.2.1															
N.2.2															
N.2.3															
N.3.1															
N.3.2															
N.3.3															
N.4.1															
S.1.1															
S.1.2															
S.2.1															
S.2.2															
S.2.3															
S.3.1															
S.3.2															
S.3.3															
H.1.1															
H.1.2															
H.1.3															
H.1.4															
H.2.1															
H.3.1															
O.1.1															
O.1.2															
O.2.1															
O.2.2															
O.3.1															

In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

MicroKom – hi.flex – precision adjustment head

- ▲ for MicroKom boring bars with Ø 16 mm or ABS 32, MicroKom bridges, and serrated body
- ▲ with thro' coolant supply
- ▲ LSCX = Recess depth of boring bar

ABS

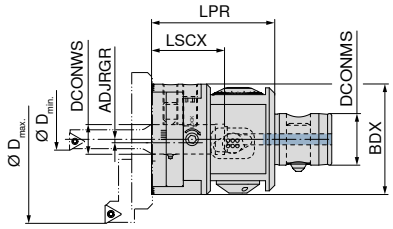



NEW
Digital

D_{min} - D_{max} mm	KOMET no.	Adapter	DCONWS mm	DCONMS mm	BDX mm	LPR mm	LSCX mm	ADJRGR mm	62 800 ... EUR W4	
5,6 - 365	M04 10040	ABS 50	16	28	60	67	39,7	10,5	1.374,00	**16197**


Clamping screw


Clamping screw


Clamping screw

Spare parts	62 950 ... EUR W7		62 950 ... EUR XX		62 950 ... EUR W7	
62 800 16197	M8x8/SW4	1,62 **14700**	M8x1x12/SW4	9,84 **13989**	M8x1x20/SW4	1,62 **13700**

Suitable ABS adapters can be found in → **Catalogue – Clamping technology, Chapter 16, Adaptors and Accessories.**

SpinTools – Digital Stick

- ▲ suitable for all SpinTools digital heads as well as for hi.flex Digital
- ▲ revised software for even more precise adjustment

Scope of supply:
incl. AAA Battery




NEW

62 309 ... EUR W4	
253,30	**00100**

MicroKom – Boring bar

▲ With internal coolant supply

ABS





NEW

62 857 ...

DMIN mm	KOMET no.	WF mm	DF mm	LU mm	LPR mm	Insert	EUR W4	
7,9	B00 25610	3,95	32	28	42	T0.X 06T1..	253,90	07989
8,9	B00 25700	4,45	32	34	48	T0.X 06T1..	256,10	21989
9,9	B00 25620	4,95	32	34	48	T0.X 06T1..	256,10	08989
10,9	B00 25710	5,45	32	43	57	T0.X 0902..	263,50	23989
11,9	B00 25630	5,95	32	43	57	T0.X 0902..	262,40	09989
13,9	B00 25640	6,95	32	50	64	T0.X 0902..	264,60	10989
15,9	B00 25650	7,95	32	58	72	T0.X 0902..	272,10	11989
17,9	B00 25661	8,95	32	59	72	T0.X 0902..	279,50	13989
19,9	B00 25671	9,90	32	70	82	T0.X 0902..	283,90	15989
21,9	B00 25681	10,90	32	70	82	T0.X 0902..	290,30	17989
23,9	B00 25691	11,90	32	70	82	T0.X 0902..	295,60	19989




TORX® Screws

62 950 ...

Spare parts Insert	EUR W7	
T0.X 06T1..	2,79	12800
T0.X 0902..	2,43	12000

MicroKom – Spindle tool





NEW

62 866 ...

D_{min} - D_{max} mm	KOMET no.	LF mm	Insert	EUR W4	
5 - 70	M05 90300	58	T0.X 0902..	407,10	07000



Cylindrical screw

62 950 ...



TORX® Screws


62 950 ...


Spare parts Insert	EUR W7		EUR W7	
T0.X 0902..	0,90	26800	2,43	12000

Suitable indexable inserts can be found in the main catalogue → **Chapter 05 Spindle tooling, pages 58–61.**

MicroKom – Adapter

▲ for 62 852 ..., 62 853 ..., 62 856 ... (essential for using the boring bar)

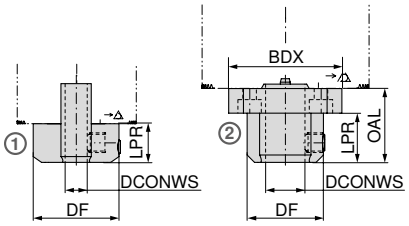



NEW

62 851 ...

DCONWS mm	KOMET no.	OAL mm	BDX mm	DF mm	LPR mm	Fig.	EUR W4	
6	M05 90200			31	16	1	110,30	00600
8	M05 90210			31	16	1	110,30	00800
10	M05 90220	25	46	31	15	2	138,20	01000
12	M05 90230	25	46	31	15	2	138,20	01200
16	M05 90240	30	46	31	20	2	138,20	01600



Cylindrical screw

62 950 ...



Clamping screw


62 950 ...

Spare parts DCONWS	EUR W7		EUR W7	
6 - 8			1,62	44800
10 - 12	0,90	00000	1,62	44800
16	0,90	00000	1,62	14700

Boring bars used in this adapter can be found on the following catalogue pages.

MicroKom – Boring bar

- ▲ can only be used with adapter 62 851 ...
- ▲ with internal coolant supply





NEW

62 856 ...

DCN mm	KOMET no.	OAL mm	LPR mm	DCONMS mm	WF mm	LDRED mm	Insert	EUR W4	
5,6	B00 37010	48	26	8	2,75	22	WOHX 02T0..	155,30	05600
6,5	B00 37020	52	30	8	3,20	26	WOHX 02T0..	150,00	06500
8,0	B00 15510	57	35	8	3,95	28	T0.X 06T1..	146,80	08000
8,0	B00 15610	75	35	16	3,95	30	T0.X 06T1..	148,90	00800
10,0	B00 15620	80	40	16	4,95	35	T0.X 0902..	150,00	01000
11,0	B00 15710	85	45	16	5,45	40	T0.X 0902..	153,20	01100
12,0	B00 15530	67	45	16	5,95	38	T0.X 0902..	155,30	11200
12,0	B00 15630	85	45	16	5,95	40	T0.X 0902..	155,30	01200
14,0	B00 15640	90	50	16	6,95	45	T0.X 0902..	157,50	01400
16,0	B00 15650	95	55	16	7,95	50	T0.X 0902..	166,00	01600
18,0	B00 15661	100	60	16	8,95	55	T0.X 0902..	172,40	01800
19,0	B00 15751	105	65	16	9,45	60	T0.X 0902..	172,40	01900
20,0	B00 15671	105	65	16	9,90	60	T0.X 0902..	173,60	02000
22,0	B00 15681	105	65	16	10,90	60	T0.X 0902..	187,50	02200
24,0	B00 15691	105	65	16	11,90	60	T0.X 0902..	188,50	02400




TORX® Screws

62 950 ...

Spare parts DCN	EUR W7	
5,6 - 6,5	2,43	11800
8 - 10	2,79	12800
11 - 24	2,43	12000

MicroKom – Carbide boring shank

- ▲ for boring head 62 854 ...
- ▲ can only be used with adapter 62 851 ...
- ▲ with internal coolant supply

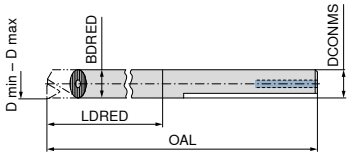



NEW

62 853 ...

D_{min} - D_{max} mm	KOMET no.	OAL mm	BDRED mm	LDRED mm	DCONMS mm	EUR W4	
13 - 17	G10 12060	120	12	75	12	327,80	01300
17 - 22	G10 12070	140	16	100	16	395,30	01700
22 - 26	G10 12080	140	16	100	16	395,30	02200




Fixing screw

62 950 ...

Spare parts DCONMS	EUR W7	
12	4,59	19700
16	4,59	19800

MicroKom – Boring bar, vibration-optimised

- ▲ can only be used with adapter 62 851 ...
- ▲ with internal coolant supply

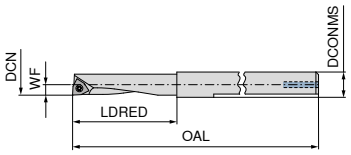



NEW

62 852 ...

DCN mm	KOMET no.	OAL mm	LDRED mm	DCONMS mm	Insert	EUR W4	
5,6	B00 30280	65	22	6	WOHX 02T0..	161,70	10600
6,9	B00 30290	80	36	6	WOHX 02T0..	161,70	00600 1)
9,0	B00 00680	90	24	8	T0.X 06T1..	277,50	00800 1)
11,0	B00 00690	95	50	10	T0.X 06T1..	293,60	01000 1)

1) Carbide version




TORX® Screws

62 950 ...

Spare parts Insert	EUR W7	
T0.X 06T1..	2,79	09700
WOHX 02T0..	2,43	11800

MicroKom – Boring head

- ▲ for boring shank 62 853 ...





NEW

62 854 ...

D_{min} - D_{max} mm	KOMET no.	WF mm	BDRED mm	Insert	EUR W4	
13 - 15	G10 12621	6,45	12	T0.X 0902..	153,20	01300
15 - 17	G10 12841	8,45	16	T0.X 0902..	156,40	01500
17 - 19	G10 12711	8,45	12	T0.X 0902..	166,00	01700
19 - 22	G10 12861	9,45	16	T0.X 0902..	171,40	01900
22 - 26	G10 12731	10,95	16	T0.X 0902..	171,40	02200




TORX® Screws

62 950 ...

Spare parts Insert	EUR W7	
T0.X 0902..	2,43	12000

Suitable indexable inserts can be found in the main catalogue
→ **Chapter 05 Spindle tooling, pages 58–61.**

MicroKom – Bridge for hi.flex, BluFlex 2





NEW

D_{min} - D_{max} mm	KOMET no.	BDX mm	HSUP mm	WT kg	62 860 ... EUR W4	
90 - 125	M05 80101	85	12,00	0,147	199,60	**12500**
120 - 155	M05 80200	115	18,25	0,107	240,00	**15500**
150 - 185	M05 80300	145	20,25	0,152	272,10	**18500**
180 - 215	M05 80400	175	23,25	0,229	302,10	**21500**
210 - 245	M05 80500	205	25,00	0,309	419,90	**24500**
240 - 275	M05 80510	235	25,00	0,349	455,30	**27500**
270 - 305	M05 80520	265	25,00	0,394	471,30	**30500**
300 - 335	M05 80530	295	25,00	0,435	506,70	**33500**
330 - 365	M05 80540	325	25,00	0,478	546,30	**36500**


Cylindrical screw


Disk spring


Spare parts BDX	62 950 ... EUR W7		62 950 ... EUR W7	
85 - 325	0,90	**00000**	1,62	**19100**

The associated filling piece (62 862 09300) and suitable insert holders (62 863 ...) can be found in the main catalogue on page 05/14

MicroKom – Serrated body for hi.flex, BluFlex 2

▲ With internal coolant supply

Scope of supply:
without insert holder





NEW

D_{min} - D_{max} mm	KOMET no.	DCONMS mm	OAL mm	LPR mm	DF mm	Fig.	62 861 ... EUR W4	
25 - 63	M05 90100	16	88,50	51,50	19	1	144,60	**06300**
25 - 63	M05 90110	16	129,12	92,12	24	2	144,60	**16300**

Suitable insert holders (62 863 ...) can be found in the main catalogue on page 05/14


Suitable indexable inserts can be found in the main catalogue → **Chapter 05 Spindle tooling, pages 58–61.**


Other accessories for this spindle system can be found in the **main catalogue from page 05/12**

Base holders for the exchangeable head system – vibration-damped

▲ also available with Balluff chip **on request**

Scope of supply:
Includes clamping screws





NEW



right / left









Adapter	LF mm	LB mm	DCONWS mm		84 195 ... EUR Y8	
HSK-T 63	150	89	25		910,10	**02537**
HSK-T 63	185	124	32		1.006,00	**03237**
HSK-T 63	225	159	40		1.102,00	**04037**



Clamping Screw


Spare parts for Article no.		84 950 ... EUR Y8	
84 195 02537	M4X12 (SW3)	1,74	**30000**
84 195 03237	M4X12 (SW3)	1,74	**30000**
84 195 04037	M4X12 (SW3)	1,74	**30000**


Overview – exchangeable head system

Exchangeable heads			+	Basic holder	
PCLN 95° CN.. 1204		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 191** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 9-19**			PSC 40 PSC 50 PSC 63 Main catalogue chapter 9 – Turning tools → **Page 189**
PDUN 93° DN.. 1104 DN.. 1506		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 191** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 27-34**			
PDQN 107,5° DN.. 1104		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 192** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 27-30**			HSK-T 40 HSK-T 63 HSK-T 100 Main catalogue chapter 9 – Turning tools → **Page 190**
PWLN 95° WN.. 0804		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 192** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 69-73**			PSC 63 vibration-damped Main catalogue chapter 9 – Turning tools → **Page 188**
SCLC 95° CC.. 1204		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 193** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 78-94**			
SDUC 93° DC.. 11T3		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 193** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 105-122**			HSK-T 63 vibration-damped **NEW**
SDQC 107,5° DC.. 11T3		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 194** Indexable inserts: main catalogue chapter 9 – Turning tools → **Page 105-122**			
For internal thread 16..		Exchangeable head: main catalogue chapter 9 – Turning tools → **Page 195** Indexable inserts: main catalogue chapter 8 – Thread turning → **Page 6-30**			cylindrical Main catalogue chapter 9 – Turning tools → **Page 188**

MonoClamp – Radial Monoholder GX-DC 16

Direct Cooling

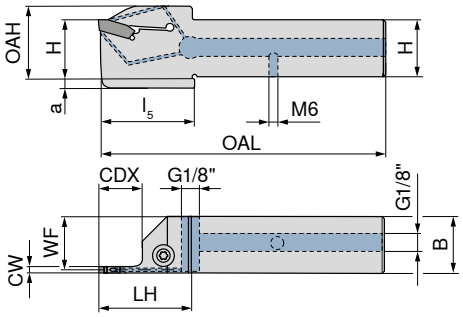

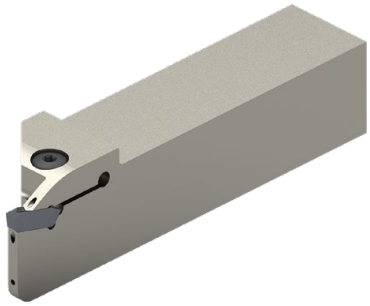

Designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	a mm	CDX mm	for grooving inserts	NEW Left-hand 70 842 ... EUR 2C/71		NEW Right-hand 70 842 ... EUR 2C/71	
E16 R/L 0013S2-1616X-S-DC-GX16	16	16	2	15,20	21	90	35	36	4	13	GX 16-1 E2..	151,80	**21601**	151,80	**21600**
E16 R/L 0013S3-1616X-S-DC-GX16	16	16	3	14,85	21	90	35	36	4	13	GX 16-2 E3..	151,80	**31601**	151,80	**31600**
E16 R/L 0013S4-1616X-S-DC-GX16	16	16	4	14,40	21	90	35	36	4	13	GX 16-3 E4..	151,80	**41601**	151,80	**41600**
E16 R/L 0013S5-1616X-S-DC-GX16	16	16	5	14,00	21	90	35	36	4	13	GX 16-3 E5..	151,80	**51601**	151,80	**51600**
E20 R/L 0013S2-2020X-S-DC-GX16	20	20	2	19,20	25	104	35			13	GX 16-1 E2..	174,80	**22001**	174,80	**22000**
E20 R/L 0013S3-2020X-S-DC-GX16	20	20	3	18,85	25	104	35			13	GX 16-2 E3..	174,80	**32001**	174,80	**32000**
E20 R/L 0013S4-2020X-S-DC-GX16	20	20	4	18,40	25	104	35			13	GX 16-3 E4..	174,80	**42001**	174,80	**42000**
E20 R/L 0013S5-2020X-S-DC-GX16	20	20	5	18,00	25	104	35			13	GX 16-3 E5..	174,80	**52001**	174,80	**52000**
E25 R/L 0013S3-2525X-S-DC-GX16	25	25	3	23,85	30	119	35			13	GX 16-2 E3..	185,90	**32501**	185,90	**32500**
E25 R/L 0013S4-2525X-S-DC-GX16	25	25	4	23,40	30	119	35			13	GX 16-3 E4..	185,90	**42501**	185,90	**42500**
E25 R/L 0013S5-2525X-S-DC-GX16	25	25	5	23,00	30	119	35			13	GX 16-3 E5..	185,90	**52501**	185,90	**52500**



Key D




Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7		70 950 ... EUR 2A/28	
GX 16-1 E2..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02 **865**
GX 16-2 E3..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02 **865**
GX 16-3 E4..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02 **865**
GX 16-3 E5..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02 **865**

Suitable indexable inserts and cutting data can be found in the main catalogue **Chapter 11 – Grooving tools**

MonoClamp – Radial Monoholder GX 16

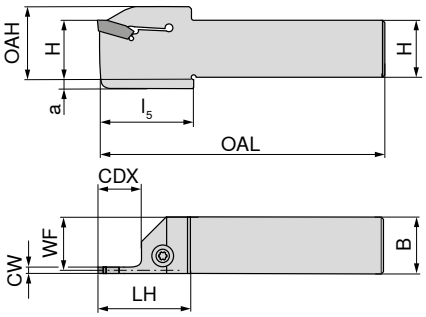



												NEW Left-hand		NEW Right-hand	
												70 843 ...		70 843 ...	
Designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	a mm	CDX mm	for grooving inserts	EUR 2C/71		EUR 2C/71	
E12 R/L 0013S2-1212K-S-GX16	12	12	2	11,20	17	125	25	26	4	13	GX 16-1 E2..	93,85	**21201**	93,85	**21200**
E12 R/L 0013S3-1212K-S-GX16	12	12	3	10,85	17	125	25	26	4	13	GX 16-2 E3..	93,85	**31201**	93,85	**31200**
E16 R/L 0013S2-1616K-S-GX16	16	16	2	15,20	21	125	25	26	4	13	GX 16-1 E2..	100,20	**21601**	100,20	**21600**
E16 R/L 0013S3-1616K-S-GX16	16	16	3	14,85	21	125	25	26	4	13	GX 16-2 E3..	100,20	**31601**	100,20	**31600**
E16 R/L 0013S4-1616K-S-GX16	16	16	4	14,40	21	125	25	26	4	13	GX 16-3 E4..	100,20	**41601**	100,20	**41600**
E16 R/L 0013S5-1616K-S-GX16	16	16	5	14,00	21	125	25	26	4	13	GX 16-3 E5..	100,20	**51601**	100,20	**51600**
E20 R/L 0013S2-2020K-S-GX16	20	20	2	19,20	25	125	25			13	GX 16-1 E2..	115,40	**22001**	115,40	**22000**
E20 R/L 0013S3-2020K-S-GX16	20	20	3	18,85	25	125	25			13	GX 16-2 E3..	115,40	**32001**	115,40	**32000**
E20 R/L 0013S4-2020K-S-GX16	20	20	4	18,40	25	125	25			13	GX 16-3 E4..	115,40	**42001**	115,40	**42000**
E20 R/L 0013S5-2020K-S-GX16	20	20	5	18,00	25	125	25			13	GX 16-3 E5..	115,40	**52001**	115,40	**52000**
E25 R/L 0013S3-2525M-S-GX16	25	25	3	23,85	30	150	25			13	GX 16-2 E3..	122,70	**32501**	122,70	**32500**
E25 R/L 0013S4-2525M-S-GX16	25	25	4	23,40	30	150	25			13	GX 16-3 E4..	122,70	**42501**	122,70	**42500**
E25 R/L 0013S5-2525M-S-GX16	25	25	5	23,00	30	150	25			13	GX 16-3 E5..	122,70	**52501**	122,70	**52500**


Key D



Clamping screw


				80 950 ...		70 950 ...	
Spare parts for grooving inserts		EUR Y7			EUR 2A/28		
GX 16-1 E2..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 16-2 E3..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 16-3 E4..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 16-3 E5..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**

Suitable indexable inserts and cutting data can be found in the main catalogue **Chapter 11 – Grooving tools**

MonoClamp – Radial Monoholder GX-DC 24

Direct Cooling

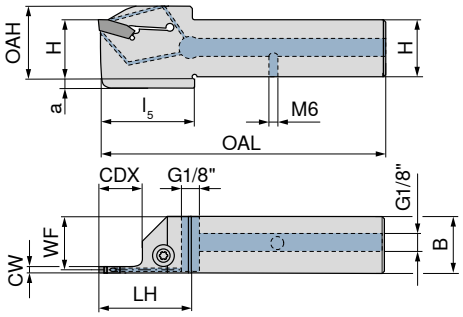

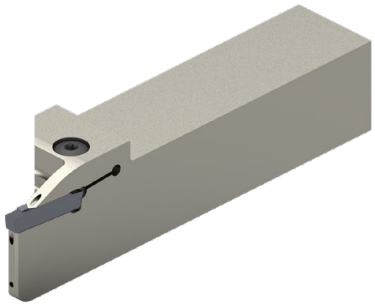

Designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	a mm	CDX mm	for grooving inserts	NEW Left-hand 70 844 ... EUR 2C/71		NEW Right-hand 70 844 ... EUR 2C/71	
E16 R/L 0021S2-1616X-S-DC-GX24	16	16	2	15,2	22	94	39	40	4	21	GX 24-1 E2..	163,20	**21601**	163,20	**21600**
E16 R/L 0021S3-1616X-S-DC-GX24	16	16	3	14,8	22	94	39	40	4	21	GX 24-2 E3..	163,20	**31601**	163,20	**31600**
E20 R/L 0021S2-2020X-S-DC-GX24	20	20	2	19,2	26	109	40			21	GX 24-1 E2..	187,90	**22001**	187,90	**22000**
E20 R/L 0021S3-2020X-S-DC-GX24	20	20	3	18,8	26	109	40			21	GX 24-2 E3..	187,90	**32001**	187,90	**32000**
E20 R/L 0021S4-2020X-S-DC-GX24	20	20	4	18,3	26	109	40			21	GX 24-3 E4..	187,90	**42001**	187,90	**42000**
E20 R/L 0021S5-2020X-S-DC-GX24	20	20	5	18,0	26	109	40			21	GX 24-3 E5..	187,90	**52001**	187,90	**52000**
E25 R/L 0021S3-2525X-S-DC-GX24	25	25	3	23,8	31	124	40			21	GX 24-2 E3..	200,90	**32501**	200,90	**32500**
E25 R/L 0021S4-2525X-S-DC-GX24	25	25	4	23,3	31	124	40			21	GX 24-3 E4..	200,90	**42501**	200,90	**42500**
E25 R/L 0021S5-2525X-S-DC-GX24	25	25	5	23,0	31	124	40			21	GX 24-3 E5..	200,90	**52501**	200,90	**52500**
E25 R/L 0021S6-2525X-S-DC-GX24	25	25	6	22,5	31	124	40			21	GX 24-4 E6..	200,90	**62501**	200,90	**62500**



Key D



Clamping screw

Spare parts for grooving inserts		80 950 ... EUR Y7			70 950 ... EUR 2A/28	
GX 24-1 E2..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 24-2 E3..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 24-3 E4..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 24-3 E5..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**
GX 24-4 E6..	T15 - IP	12,25	**128**	M5x18 - 15IP	10,02	**865**

Suitable indexable inserts and cutting data can be found in the main catalogue **Chapter 11 – Grooving tools**

MonoClamp – Radial Monoholder GX 24

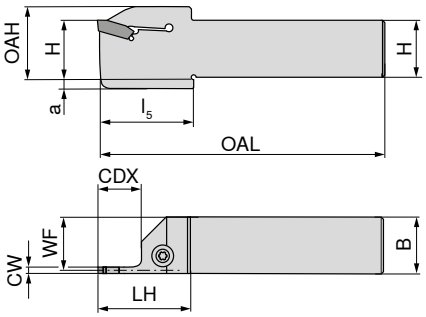

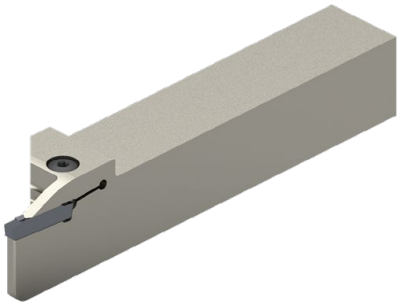

Designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	l_5 mm	a mm	CDX mm	for grooving inserts	NEW Left-hand 70 845 ... EUR 2C/71		NEW Right-hand 70 845 ... EUR 2C/71	
E16 R/L 0021S2-1616K-S-GX24	16	16	2	15,2	22	125	39	40	4	21	GX 24-1 E2..	107,70	**21601**	107,70	**21600**
E16 R/L 0021S3-1616K-S-GX24	16	16	3	14,8	22	125	39	40	4	21	GX 24-2 E3..	107,70	**31601**	107,70	**31600**
E20 R/L 0021S2-2020K-S-GX24	20	20	2	19,2	26	125	40			21	GX 24-1 E2..	124,00	**22001**	124,00	**22000**
E20 R/L 0021S3-2020K-S-GX24	20	20	3	18,8	26	125	40			21	GX 24-2 E3..	124,00	**32001**	124,00	**32000**
E20 R/L 0021S4-2020K-S-GX24	20	20	4	18,3	26	125	40			21	GX 24-3 E4..	124,00	**42001**	124,00	**42000**
E20 R/L 0021S5-2020K-S-GX24	20	20	5	18,0	26	125	40			21	GX 24-3 E5..	124,00	**52001**	124,00	**52000**
E25 R/L 0021S3-2525M-S-GX24	25	25	3	23,8	31	150	40			21	GX 24-2 E3..	132,60	**32501**	132,60	**32500**
E25 R/L 0021S4-2525M-S-GX24	25	25	4	23,3	31	150	40			21	GX 24-3 E4..	132,60	**42501**	132,60	**42500**
E25 R/L 0021S5-2525M-S-GX24	25	25	5	23,0	31	150	40			21	GX 24-3 E5..	132,60	**52501**	132,60	**52500**
E25 R/L 0021S6-2525M-S-GX24	25	25	6	22,5	31	150	40			21	GX 24-4 E6..	132,60	**62501**	132,60	**62500**


Key D


Clamping screw

Spare parts for grooving inserts	80 950 ...		EUR Y7		70 950 ...		EUR 2A/28	
GX 24-1 E2..	T15 - IP	**128**	12,25		M5x18 - 15IP	**865**	10,02	
GX 24-2 E3..	T15 - IP	**128**	12,25		M5x18 - 15IP	**865**	10,02	
GX 24-3 E4..	T15 - IP	**128**	12,25		M5x18 - 15IP	**865**	10,02	
GX 24-3 E5..	T15 - IP	**128**	12,25		M5x18 - 15IP	**865**	10,02	
GX 24-4 E6..	T15 - IP	**128**	12,25		M5x18 - 15IP	**865**	10,02	

Suitable indexable inserts and cutting data can be found in the main catalogue **Chapter 11 – Grooving tools**

Coding example

GX mono holder (old)

E	25	R	00	21		2525	M			GX24-3

GX mono holder (new)

					NEW			NEW		
E	25	R	00	21	S4	2525	M	S		GX24

GX mono holder (new with DC)

					NEW			NEW	NEW	
E	25	R	00	21	S4	2525	X	S	DC	GX24
Application E = external I = internal	Size (25 mm)	Holder version R=Right Handed L=Left Handed	Approach angle 0°	Groove depth (21 mm)	Groove width (S4)	Shank type 25x25mm	Shank length L = sh. ISO X = special length	Insert clamping S = Screw	Cooling system DC = DirectCooling	Grooving system/ width




DRAGONSKIN

The coatings for the highest performance

Machining without compromise

The product category Dragonskin is intended to help make tools easily recognizable and quick to find using CERATIZIT‘s high-performance coating technology. All products that are marked with the Dragonskin icon represent unmatchable performance, maximum tool life and maximum process reliability.

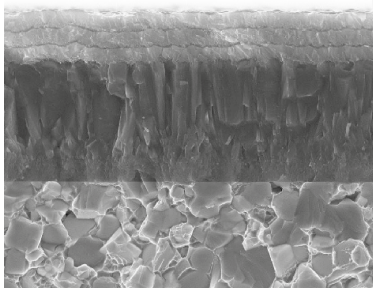



Dragonskin Coating


Micro-end milling cutter

▲ T_x = maximum engagement depth





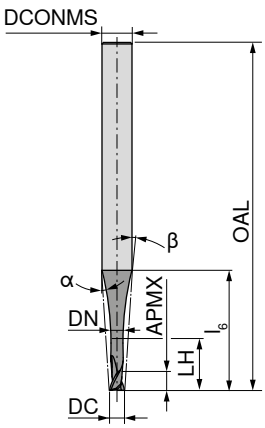



DRAGONSKIN





Factory standard

HA


52 802 ...


DC mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS $_{h5}$ mm	T_x	ZEFP	EUR V1	
0,3	0,18	0,24	0,66	5,8	38	16,5	14	3	2,2 x DC	2	50,07	**03100**
0,3	0,30	0,24	1,50	6,9	38	16	11,5	3	5 x DC	2	50,07	**03300**
0,3	0,30	0,24	3,00	9,7	38	13,5	8,5	3	10 x DC	2	50,07	**03500**
0,4	0,24	0,32	0,88	5,8	38	16,5	13,5	3	2,2 x DC	2	45,22	**04100**
0,4	0,40	0,32	2,00	7,4	38	15,5	10,5	3	5 x DC	2	45,22	**04300**
0,4	0,40	0,32	4,00	10,2	38	14	8	3	10 x DC	2	45,22	**04500**
0,6	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	41,31	**06100**
0,6	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	41,31	**06300**
0,6	0,60	0,48	6,00	11,6	38	14	6,5	3	10 x DC	2	41,31	**06500**
0,7	0,42	0,56	1,54	5,9	38	16,5	11,5	3	2,2 x DC	2	46,16	**07100**
0,7	0,70	0,56	3,50	8,8	38	14,5	8	3	5 x DC	2	46,16	**07300**
0,7	0,70	0,56	7,00	12,5	38	14	6	3	10 x DC	2	46,16	**07500**
0,9	0,54	0,72	1,98	5,9	38	17	10,5	3	2,2 x DC	2	39,74	**09100**
0,9	0,90	0,72	4,50	9,5	38	14	7	3	5 x DC	2	39,74	**09300**
0,9	0,90	0,72	9,00	14,4	38	13	5	3	10 x DC	2	39,74	**09500**
1,1	0,66	0,88	2,42	6,0	38	17	9,5	3	2,2 x DC	2	38,79	**11100**
1,1	1,10	0,88	5,50	10,0	43	14	6	3	5 x DC	2	38,79	**11300**
1,1	1,10	0,88	11,00	15,9	43	13	4	3	10 x DC	2	38,79	**11500**
1,2	0,72	0,96	2,64	6,0	38	17	9	3	2,2 x DC	2	38,79	**12100**
1,2	1,20	0,96	6,00	10,5	43	13,5	5,5	3	5 x DC	2	38,79	**12300**
1,2	1,20	0,96	12,00	16,5	43	13,5	4	3	10 x DC	2	38,79	**12500**
1,3	0,78	1,04	2,86	6,0	38	17	8,5	3	2,2 x DC	2	38,70	**13100**
1,3	1,30	1,04	6,50	11,0	43	12,5	5	3	5 x DC	2	38,70	**13300**
1,3	1,30	1,04	13,00	17,1	43	14	3,5	3	10 x DC	2	38,70	**13500**
1,4	0,84	1,12	3,08	6,1	38	17	8	3	2,2 x DC	2	38,70	**14100**
1,4	1,40	1,12	7,00	11,5	43	12	4,5	3	5 x DC	2	38,70	**14300**
1,4	1,40	1,12	14,00	17,6	43	15	3,5	3	10 x DC	2	38,70	**14500**
1,6	0,96	1,28	3,52	6,2	38	16,5	7	3	2,2 x DC	2	39,63	**16100**
1,6	1,60	1,28	8,00	12,0	43	12	4	3	5 x DC	2	39,63	**16300**
1,6	1,60	1,28	16,00	18,7	43	17	3	3	10 x DC	2	39,63	**16500**
1,7	1,02	1,36	3,74	6,2	38	17	6,5	3	2,2 x DC	2	41,53	**17100**
1,7	1,70	1,36	8,50	12,5	43	11	3,5	3	5 x DC	2	41,53	**17300**
1,7	1,70	1,36	17,00	19,3	43	18,5	2,5	3	10 x DC	2	41,53	**17500**
1,9	1,14	1,52	4,18	6,2	38	17,5	5,5	3	2,2 x DC	2	42,17	**19100**
1,9	1,90	1,52	9,50	13,2	43	10	3	3	5 x DC	2	42,17	**19300**
1,9	1,90	1,52	19,00	20,5	43	23,5	2,5	3	10 x DC	2	42,17	**19500**


P	●
M	●
K	●
N	●
S	●
H	○
O	○

Micro-ball nosed cutter

▲ T_x = maximum engagement depth

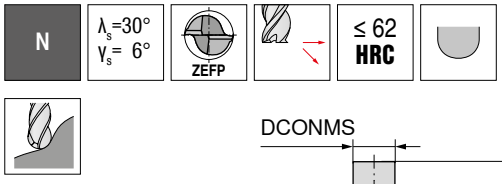

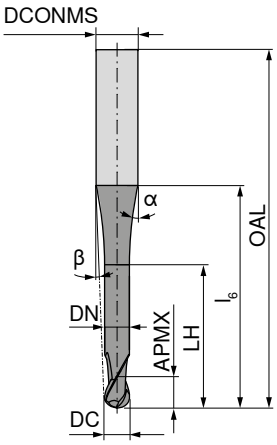



DRAGONSKIN





Factory standard

HA


52 804 ...


DC ±0,01 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	EUR V1	
0,3	0,18	0,24	0,66	5,8	38	16,5	14	3	2,2 x DC	2	57,75	**03100**
0,3	0,30	0,24	1,50	6,9	38	16	11,5	3	5 x DC	2	57,75	**03400**
0,3	0,30	0,24	3,00	9,7	38	13,5	8,5	3	10 x DC	2	57,75	**03700**
0,4	0,24	0,32	0,88	5,8	38	16,5	13	3	2,2 x DC	2	52,38	**04100**
0,4	0,40	0,32	2,00	7,4	38	15,5	10,5	3	5 x DC	2	52,38	**04400**
0,4	0,40	0,32	4,00	10,2	38	14	8	3	10 x DC	2	52,38	**04700**
0,6	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	47,33	**06100**
0,6	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	47,33	**06400**
0,6	0,60	0,48	6,00	10,6	38	17	7	3	10 x DC	2	47,33	**06700**
0,7	0,42	0,56	1,54	5,9	38	16,5	11,5	3	2,2 x DC	2	49,76	**07100**
0,7	0,70	0,56	3,50	8,8	38	14	8	3	5 x DC	2	49,76	**07400**
0,7	0,70	0,56	7,00	10,6	38	20,5	7	3	10 x DC	2	49,76	**07700**
0,9	0,54	0,72	1,98	5,9	38	17	10,5	3	2,2 x DC	2	51,32	**09100**
0,9	0,90	0,72	4,50	9,5	38	14	7	3	5 x DC	2	51,32	**09400**
0,9	0,90	0,72	9,00	10,5	38	39,5	6,5	3	10 x DC	2	51,32	**09700**
1,1	0,66	0,88	2,42	7,9	43	16,5	11	4	2,2 x DC	2	47,08	**11100**
1,1	1,10	0,88	5,50	12,0	43	14,5	7,5	4	5 x DC	2	47,08	**11400**
1,1	1,10	0,88	11,00	18,3	43	13,5	5,5	4	10 x DC	2	47,08	**11700**
1,3	0,78	1,04	2,86	8,0	43	16,5	10,5	4	2,2 x DC	2	47,18	**13100**
1,3	1,30	1,04	6,50	12,8	43	14	6,5	4	5 x DC	2	47,18	**13400**
1,3	1,30	1,04	13,00	18,2	43	17	5	4	10 x DC	2	47,18	**13700**
1,4	0,84	1,12	3,08	8,0	43	16,5	10	4	2,2 x DC	2	47,38	**14100**
1,4	1,40	1,12	7,00	13,2	43	14	6,5	4	5 x DC	2	47,38	**14400**
1,4	1,40	1,12	14,00	18,1	43	20,5	5	4	10 x DC	2	47,38	**14700**
1,6	0,96	1,28	3,52	8,1	43	16,5	9	4	2,2 x DC	2	46,28	**16100**
1,6	1,60	1,28	8,00	14,1	43	13	5,5	4	5 x DC	2	46,28	**16400**
1,6	1,60	1,28	16,00	18,5	43	29,5	4,5	4	10 x DC	2	46,28	**16700**
1,7	1,02	1,36	3,74	8,1	43	16,5	9	4	2,2 x DC	2	48,24	**17100**
1,7	1,70	1,36	8,50	14,5	43	12,5	5	4	5 x DC	2	48,24	**17400**
1,7	1,70	1,36	17,00	18,9	43	35,5	4	4	10 x DC	2	48,24	**17700**
1,9	1,14	1,52	4,18	8,2	43	16,5	8	4	2,2 x DC	2	48,96	**19100**
1,9	1,90	1,52	9,50	15,5	43	11,5	4,5	4	5 x DC	2	48,96	**19400**
1,9	1,90	1,52	19,00	19,9	43	54,5	3,5	4	10 x DC	2	48,96	**19700**


P	●
M	●
K	●
N	●
S	●
H	○
O	○

Micro-torus cutter

▲ T_x = maximum engagement depth

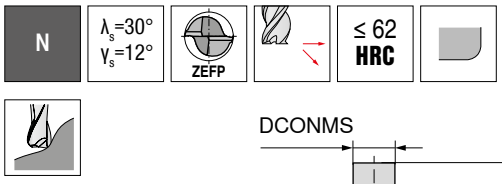

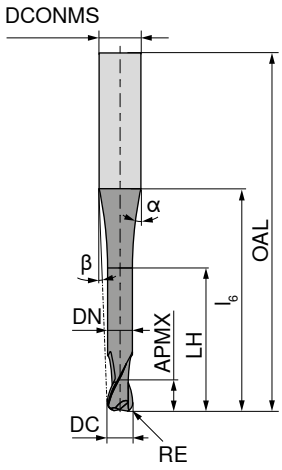



52 806 ...

DC ±0,01 mm	RE ±0,005 mm	APMX mm	DN mm	LH mm	l_6 mm	OAL mm	α°	β°	DCONMS h5 mm	T_x	ZEFP	EUR V1	
0,6	0,1	0,36	0,48	1,32	5,9	38	16,5	12	3	2,2 x DC	2	47,33	**06101**
0,6	0,1	0,60	0,48	3,00	8,3	38	15	9	3	5 x DC	2	47,33	**06401**
0,6	0,1	0,60	0,48	6,00	10,6	38	17	7	3	10 x DC	2	47,33	**06701**
0,8	0,2	0,48	0,64	1,76	5,9	38	16,5	11	3	2,2 x DC	2	49,76	**08102**
0,8	0,2	0,80	0,64	4,00	9,0	38	14,5	7,5	3	5 x DC	2	49,76	**08402**
0,8	0,2	0,80	0,64	8,00	10,5	38	27	6,5	3	10 x DC	2	49,76	**08702**
1,2	0,2	0,72	0,96	2,64	7,9	43	16,5	10,5	4	2,2 x DC	2	47,08	**12102**
1,2	0,2	1,20	0,96	6,00	12,4	43	14,5	7	4	5 x DC	2	47,08	**12402**
1,2	0,2	1,20	0,96	12,00	18,2	43	15	5	4	10 x DC	2	47,08	**12702**
1,6	0,3	0,96	1,28	3,52	8,1	43	16,5	9	4	2,2 x DC	2	46,28	**16103**
1,6	0,3	1,60	1,28	8,00	14,1	43	13	5,5	4	5 x DC	2	46,28	**16403**
1,6	0,3	1,60	1,28	16,00	18,5	43	29,5	4,5	4	10 x DC	2	46,28	**16703**
1,8	0,4	1,08	1,44	3,96	8,1	43	16,5	8,5	4	2,2 x DC	2	48,24	**18104**
1,8	0,4	1,80	1,44	9,00	15,0	43	12	5	4	5 x DC	2	48,24	**18404**
1,8	0,4	1,80	1,44	18,00	19,5	43	41	4	4	10 x DC	2	48,24	**18704**

P	●
M	●
K	●
N	●
S	●
H	○
O	○

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – Micro cutter – 2.2xDC

		52 802 ... / 52 804 ... / 52 806 ...															
		Ø DC = 0,2–0,4 mm					Ø DC = 0,5–0,7 mm					Ø DC = 0,8–0,9 mm					
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,02	0,02	0,02	0,01	0,01	$a_{p\,max.}$	0,1	0,1	0,1	0,1	0,05	$a_{p\,max.}$	0,2	0,2	0,2	0,2	0,12
	$n_{min.}$	30.000					$n_{min.}$	12.000					$n_{min.}$	8.000				
Index	n	v_f mm/min.					n	v_f mm/min.					n	v_f mm/min.				
P.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.3	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.1.4	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.1.5	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.2.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.2.3	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.2.4	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.3.1	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.3.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.3.3	50.000	201	175	151	125	101	50.000	237	206	178	147	119	50.000	420	365	315	260	210
P.4.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
P.4.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
M.3.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.2.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.2.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	485	422	364	301	242
K.3.1	50.000	141	123	106	88	71	50.000	175	152	131	109	88	32.000	285	248	213	176	142
K.3.2	50.000	141	123	106	88	71	50.000	175	152	131	109	88	32.000	285	248	213	176	142
N.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	44.000	485	422	364	301	242
N.3.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.3.3	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
N.4.1	50.000	212	185	159	132	106	50.000	250	218	188	155	125	50.000	531	462	398	329	266
S.1.1	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.1.2	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.2.1	50.000	72	62	54	44	36	50.000	89	77	66	55	44	25.000	91	79	68	56	45
S.2.2	50.000	46	40	35	29	23	30.000	55	48	41	34	27	19.000	69	60	51	43	34
S.2.3	50.000	54	47	41	34	27	30000	66	57	49	41	33	12.000	78	68	59	49	39
S.3.1	50.000	114	99	85	71	57	50.000	164	143	123	102	82	44.000	114	99	85	71	57
S.3.2	50.000	114	99	85	71	57	50.000	164	143	123	102	82	44.000	164	143	123	102	82
S.3.3	50.000	70	61	53	43	35	50.000	85	74	64	53	42	38.000	101	88	76	63	51
H.1.1	50.000	219	191	164	136	110	50.000	232	202	174	144	116	50.000	388	338	291	241	194
H.1.2	50.000	201	175	151	125	101	50.000	285	248	213	176	142	38.000	336	292	252	208	168
H.1.3	50.000	114	99	85	71	57	50.000	134	117	101	83	67	25.000	156	136	117	97	78
H.1.4	50.000	107	93	80	67	54	50.000	126	110	95	78	63	25.000	141	123	106	88	71
H.2.1	50.000	219	191	164	136	110	50.000	232	202	174	144	116	50.000	388	338	291	241	194
H.3.1	50.000	201	175	151	125	101	50.000	285	248	213	176	142	38.000	336	292	252	208	168
O.1.1	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
O.1.2	50.000	232	202	174	144	116	50.000	274	238	205	170	137	50.000	582	506	436	361	291
O.2.1	50.000	212	185	159	132	106	50.000	200	174	150	124	100	38.000	316	275	237	196	158
O.2.2	50.000	212	185	159	132	106	50.000	200	174	150	124	100	38.000	316	275	237	196	158
O.3.1																		

		52 802 ... / 52 804 ... / 52 806 ...												● 1st choice ○ suitable		
		Ø DC = 1,0–1,4 mm						Ø DC = 1,5–1,7 mm								
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6 –1,0 x DC		a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,3	0,3	0,3	0,3	0,2		$a_{p\,max.}$	0,45	0,45	0,45	0,45	0,3			
	$n_{min.}$	6.500						$n_{min.}$	6.500							
Index	n	v_f mm/min.						n	v_f mm/min.					Emulsion	Compressed air	MMS
P.1.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	●	○	○
P.1.2	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	●	○	○
P.1.3	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	●	○	○
P.1.4	50.000	671	584	503	416	335		33.000	1039	904	779	644	520	●	○	○
P.1.5	50.000	671	584	503	416	335		33.000	1039	904	779	644	520	●	○	○
P.2.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600		●	○
P.2.2	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600		●	○
P.2.3	50.000	671	584	503	416	335		33.000	1039	904	779	644	520		●	○
P.2.4	50.000	671	584	503	416	335		33.000	1039	904	779	644	520		●	○
P.3.1	50.000	671	584	503	416	335		33.000	1039	904	779	644	520		●	○
P.3.2	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600		●	○
P.3.3	50.000	671	584	503	416	335		33.000	1039	904	779	644	520		●	○
P.4.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600		●	○
P.4.2	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600		●	○
M.1.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	●		○
M.2.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	●		○
M.3.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	●		○
K.1.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	○	●	
K.1.2	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	○	●	
K.2.1	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	○	●	
K.2.2	50.000	775	674	581	480	387		33.000	1200	1044	900	744	600	○	●	
K.3.1	50.000	389	338	292	241	194		21.000	548	477	411	340	274		●	
K.3.2	25000	389	338	292	241	194		21.000	548	477	411	340	274		●	
N.1.1	50.000	930	809	697	576	465		50.000	1500	1305	1125	930	750	●		○
N.1.2	50.000	930	809	697	576	465		50.000	1500	1305	1125	930	750	●		○
N.2.1																
N.2.2																
N.2.3																
N.3.1	44.000	775	674	581	480	387		29.000	1160	1009	870	719	580	●		○
N.3.2	50.000	930	809	697	576	465		38.000	1400	1218	1050	868	700	●		○
N.3.3	50.000	930	809	697	576	465		38.000	1400	1218	1050	868	700	●		○
N.4.1	50.000	849	738	636	526	424		38.000	1388	1207	1041	860	694	●		○
S.1.1	15.000	99	86	74	61	49		12.000	170	148	127	105	85	●		○
S.1.2	15.000	99	86	74	61	49		12.000	170	148	127	105	85	●		○
S.2.1	25.000	152	132	114	94	76		16.000	294	256	220	182	147	●		○
S.2.2	15.000	99	86	74	61	49		12.000	170	148	127	105	85	●		○
S.2.3	12.000	131	114	99	82	66		8.000	255	221	191	158	127	●		○
S.3.1	44.000	170	148	127	105	85		29.000	329	286	246	204	164	●		○
S.3.2	44.000	247	215	186	153	124		29.000	365	318	274	226	183	●		○
S.3.3	38.000	170	148	127	105	85		25.000	329	286	246	204	164	●		○
H.1.1	50.000	620	539	465	384	310		33.000	850	740	638	527	425		●	
H.1.2	38.000	537	467	402	333	268		25.000	779	678	585	483	390		●	
H.1.3	25.000	235	204	176	146	117		16.000	346	301	260	215	173		●	
H.1.4	25.000	221	193	166	137	111		16.000	327	284	245	202	163		●	
H.2.1	50.000	620	539	465	384	310		33.000	850	740	638	527	425		●	
H.3.1	38.000	537	467	402	333	268		25.000	779	678	585	483	390		●	
O.1.1	50.000	930	809	697	576	465		38.000	1520	1322	1140	942	760	●	○	○
O.1.2	50.000	930	809	697	576	465		33.000	1320	1148	990	818	660	●	○	○
O.2.1	38.000	495	431	371	307	247		25.000	685	596	513	424	342	●	○	○
O.2.2	38.000	495	431	371	307	247		25.000	685	596	513	424	342	●	○	○
O.3.1																

Cutting data standard values – Micro cutter – 2.2xDC

		52 802 ... / 52 804 ... / 52 806 ...												● 1st choice ○ suitable		
		Ø DC = 1,8–1,9 mm						Ø DC = 2,0 mm								
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,54	0,54	0,54	0,54	0,36	$a_{p\,max.}$	0,6	0,6	0,6	0,6	0,4			
	$n_{min.}$	5.500					$n_{min.}$	5.000							
Index	n	v_f mm/min.					n	v_f mm/min.					Emulsion	Compressed air	MMS
P.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.1.5	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●	○	○
P.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.2.4	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.3.3	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.4.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
P.4.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750		●	○
M.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
M.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
M.3.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	●		○
K.1.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.1.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.2.1	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.2.2	29.000	1300	1131	975	806	650	25.000	1500	1300	1125	930	750	○	●	
K.3.1	18.000	630	548	473	391	315	12.000	750	650	550	450	350		●	
K.3.2	18.000	630	548	473	391	315	12.000	750	650	550	450	350		●	
N.1.1	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750	●		○
N.1.2	44.000	1800	1566	1350	1116	900	25.000	1500	1300	1125	930	750	●		○
N.2.1															
N.2.2															
N.2.3															
N.3.1	25.000	1250	1088	938	775	625	19.000	1140	990	855	700	570	●		○
N.3.2	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750	●		○
N.3.3	32.000	1520	1322	1140	942	760	25.000	1500	1300	1125	930	750	●		○
N.4.1	33.000	1560	1357	1170	967	780	25.000	1500	1300	1125	930	750	●		○
S.1.1	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.1.2	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.2.1	14.000	420	365	315	260	210	12.500	500	400	350	300	250	●		○
S.2.2	10.000	280	244	210	174	140	7.500	300	260	230	200	160	●		○
S.2.3	7.000	370	322	278	229	185	6.000	300	260	230	200	160	●		○
S.3.1	25.000	400	348	300	248	200	25.000	1500	1300	1125	930	750	●		○
S.3.2	25.000	480	418	360	298	240	25.000	1500	1300	1125	930	750	●		○
S.3.3	22.000	380	331	285	236	190	25.000	1500	1300	1125	930	750	●		○
H.1.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
H.1.2	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
H.1.3	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
H.1.4	14.000	420	365	315	260	210	19.000	1140	990	855	700	570		●	
H.2.1	29.000	1200	1044	900	744	600	25.000	1500	1300	1125	930	750		●	
H.3.1	22.000	1000	870	750	620	500	19.000	1140	990	855	700	570		●	
O.1.1	33.000	1560	1357	1170	967	780	19.000	1140	990	855	700	570	●	○	○
O.1.2	28.000	1400	1218	1050	868	700	19.000	1140	990	855	700	570	●	○	○
O.2.1	22.000	800	696	600	496	400	12.000	720	630	540	450	360	●	○	○
O.2.2	22.000	800	696	600	496	400	12.000	720	630	540	450	360	●	○	○
O.3.1															

Cutting data standard values – Micro cutter – 5xDC

	52 802 ... / 52 804 ... / 52 806 ...															● 1st choice ○ suitable		
	Ø DC = 0,2–0,4 mm					Ø DC = 0,5–0,7 mm					Ø DC = 0,8–0,9 mm							
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,012	0,012	0,012	0,012	$a_{p\,max.}$	0,06	0,06	0,06	0,06	$a_{p\,max.}$	0,12	0,12	0,12	0,12	0,064			
	$n_{min.}$	30.000				$n_{min.}$	12.000				$n_{min.}$	8.000							
Index	n	v_f mm/min.				n	v_f mm/min.				n	v_f mm/min.					Emulsion	Compressed air	MMS
P.1.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.3	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242	●	○	○
P.1.4	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165	●	○	○
P.1.5	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165	●	○	○
P.2.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.2.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.2.3	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.2.4	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.3.1	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.3.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.3.3	50.000	201	175	151	125	50.000	237	206	178	147	31.000	330	287	248	205	165		●	○
P.4.1	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
P.4.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	485	422	364	301	242		●	○
M.1.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
M.2.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
M.3.1	50.000	232	202	174	144	50.000	219	191	164	136	31.000	346	301	260	215	173	●		○
K.1.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.1.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.2.1	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.2.2	50.000	232	202	174	144	50.000	219	191	164	136	50.000	416	362	312	258	208	○	●	
K.3.1	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	
K.3.2	50.000	141	123	106	88	50.000	175	152	131	109	25.000	240	209	180	149	120		●	
N.1.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.1.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.2.1																			
N.2.2																			
N.2.3																			
N.3.1	50.000	232	202	174	144	50.000	274	238	205	170	38.000	485	422	364	301	242	●		○
N.3.2	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.3.3	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●		○
N.4.1	50.000	212	185	159	132	50.000	250	218	188	155	50.000	506	440	379	314	253	●		○
S.1.1	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.1.2	50.000	55	48	41	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.2.1	50.000	63	54	47	39	44.000	76	66	57	47	22.000	91	79	68	56	45	●		○
S.2.2	50.000	55	47	40	32	31.000	58	51	44	36	15.000	98	85	73	61	49	●		○
S.2.3	50.000	46	40	35	29	25.000	55	48	41	34	12.000	78	68	59	49	39	●		○
S.3.1	50.000	60	61	48	41	50.000	71	62	53	44	38.000	114	99	85	71	57	●		○
S.3.2	50.000	60	61	48	41	50.000	71	62	53	44	38.000	126	110	95	78	63	●		○
S.3.3	50.000	60	52	45	37	50.000	71	62	49	39	31.000	89	77	66	55	44	●		○
H.1.1	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●	
H.1.2	50.000	95	83	71	59	44.000	134	117	101	83	22.000	180	157	135	112	90		●	
H.1.3	50.000	89	78	67	55	44.000	126	110	95	78	22.000	170	148	127	105	85		●	
H.1.4																			
H.2.1	50.000	155	135	116	96	50.000	164	143	123	102	44.000	346	301	260	215	173		●	
H.3.1	50.000	95	83	71	59	50.000	134	117	101	83	31.000	180	157	135	112	90		●	
O.1.1	50.000	232	202	174	144	50.000	274	238	205	170	50.000	554	482	416	344	277	●	○	○
O.1.2	50.000	232	202	174	144	50.000	274	238	205	170	44.000	554	482	416	344	277	●	○	○
O.2.1	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158	●	○	○
O.2.2	50.000	141	123	106	88	50.000	200	174	150	124	31.000	316	275	237	196	158	●	○	○
O.3.1																			

a_e = 0.6–1.0 x DC: If values are missing, only trochoidal slot milling and profiling are permitted. Otherwise, there is the risk of tool breakage.

Cutting data standard values – Micro cutter – 5xDC

		52 802 ... / 52 804 ... / 52 806 ...															
		Ø DC = 1,0–1,4 mm					Ø DC = 1,5–1,7 mm					Ø DC = 1,8–1,9 mm					
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC
	$a_{p\,max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\,max.}$	0,3	0,3	0,3	0,3	0,2	$a_{p\,max.}$	0,54	0,54	0,54	0,54	0,36
	$n_{min.}$	6.500					$n_{min.}$	6.500					$n_{min.}$	5.500				
Index	n	v_f mm/min.					n	v_f mm/min.					n	v_f mm/min.				
P.1.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.3	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.1.4	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.1.5	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.2.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.2.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.2.3	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.2.4	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.3.1	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.3.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.3.3	31.000	416	362	312	258	208	21.000	693	603	520	430	346	18.000	850	740	638	527	425
P.4.1	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
P.4.2	44.000	682	593	511	423	341	29.000	1160	1009	870	719	580	25.000	1250	1088	938	775	625
M.1.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
M.2.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
M.3.1	31.000	480	418	360	298	240	21.000	800	696	600	496	400	18.000	850	740	638	527	425
K.1.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.1.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.2.1	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.2.2	50.000	620	539	465	384	310	33.000	1000	870	750	620	500	28.000	1320	1148	990	818	660
K.3.1	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
K.3.2	25.000	297	258	223	184	148	16.000	411	357	308	255	205	14.000	480	418	360	298	240
N.1.1	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
N.1.2	50.000	775	674	581	480	387	42.000	1200	1044	900	744	600	36.000	1500	1305	1125	930	750
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	38.000	697	607	523	432	349	25.000	1000	870	750	620	500	22.000	1100	957	825	682	550
N.3.2	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
N.3.3	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
N.4.1	50.000	849	738	636	526	424	33.000	1205	1048	904	747	602	28.000	1400	1218	1050	868	700
S.1.1	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.1.2	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.2.1	22.000	114	99	85	71	57	14.000	196	170	147	121	98	12.000	300	261	225	186	150
S.2.2	15.000	120	105	90	75	60	10.000	184	160	138	114	92	8.000	280	244	210	174	140
S.2.3	12.000	131	114	99	82	66	8.000	170	148	127	105	85	7.000	240	209	180	149	120
S.3.1	38.000	156	135	117	96	78	25.000	274	238	205	170	137	22.000	380	331	285	236	190
S.3.2	38.000	212	185	159	132	106	25.000	365	318	274	226	183	22.000	450	392	338	279	225
S.3.3	31.000	127	111	95	79	64	21.000	201	175	151	125	100	18.000	300	261	225	186	150
H.1.1	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
H.1.2	22.000	235	204	176	146	117	14.000	346	301	260	215	173	12.000	450	392	338	279	225
H.1.3	22.000	221	193	166	137	111	14.000	327	284	245	202	163	12.000	450	392	338	279	225
H.1.4																		
H.2.1	44.000	426	371	320	264	213	29.000	600	522	450	372	300	25.000	800	696	600	496	400
H.3.1	31.000	201	175	151	125	101	21.000	346	301	260	215	173	16.000	500	435	375	310	250
O.1.1	50.000	930	809	697	576	465	33.000	1320	1148	990	818	660	28.000	1400	1218	1050	868	700
O.1.2	44.000	813	708	610	504	407	29.000	1160	1009	870	719	580	25.000	1200	1044	900	744	600
O.2.1	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
O.2.2	31.000	438	381	329	272	219	21.000	575	500	431	357	288	18.000	650	566	488	403	325
O.3.1																		

		52 802 ... / 52 804 ... / 52 806 ...							
		Ø DC = 2,0 mm					● 1st choice		
							○ suitable		
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,6–1,0 x DC			
	$a_{p\,max.}$	0,6	0,6	0,6	0,6	0,4			
	$n_{min.}$	5.000							
Index	n	v_f mm/min.					Emulsion	Compressed air	MMS
P.1.1	22.000	1320	1148	990	818	660	●	○	○
P.1.2	22.000	1320	1148	990	818	660	●	○	○
P.1.3	22.000	1320	1148	990	818	660	●	○	○
P.1.4	15.000	900	783	675	558	450	●	○	○
P.1.5	15.000	900	783	675	558	450	●	○	○
P.2.1	22.000	1320	1148	990	818	660		●	○
P.2.2	22.000	1320	1148	990	818	660		●	○
P.2.3	15.000	900	783	675	558	450		●	○
P.2.4	15.000	900	783	675	558	450		●	○
P.3.1	15.000	900	783	675	558	450		●	○
P.3.2	22.000	1320	1148	990	818	660		●	○
P.3.3	15.000	900	783	675	558	450		●	○
P.4.1	22.000	1320	1148	990	818	660		●	○
P.4.2	22.000	1320	1148	990	818	660		●	○
M.1.1	15.000	900	783	675	558	450	●		○
M.2.1	15.000	900	783	675	558	450	●		○
M.3.1	15.000	900	783	675	558	450	●		○
K.1.1	25.000	1500	1305	1125	930	750	○	●	
K.1.2	25.000	1500	1305	1125	930	750	○	●	
K.2.1	25.000	1500	1305	1125	930	750	○	●	
K.2.2	25.000	1500	1305	1125	930	750	○	●	
K.3.1	12.000	520	452	390	322	260		●	
K.3.2	12.000	520	452	390	322	260		●	
N.1.1	31.000	1860	1618	1395	1153	930	●		○
N.1.2	31.000	1860	1618	1395	1153	930	●		○
N.2.1									
N.2.2									
N.2.3									
N.3.1	19.000	1140	992	855	707	570	●		○
N.3.2	25.000	1500	1305	1125	930	750	●		○
N.3.3	25.000	1500	1305	1125	930	750	●		○
N.4.1	25.000	1500	1305	1125	930	750	●		○
S.1.1	7.000	300	261	225	186	150	●		○
S.1.2	7.000	300	261	225	186	150	●		○
S.2.1	11.000	400	348	300	248	200	●		○
S.2.2	7.000	300	261	225	186	150	●		○
S.2.3	6.000	260	226	195	161	130	●		○
S.3.1	19.000	420	365	315	260	210	●		○
S.3.2	19.000	500	435	375	310	250	●		○
S.3.3	15.000	400	348	300	248	200	●		○
H.1.1	15.000	500	435	375	310	250		●	
H.1.2	11.000	480	418	360	298	240		●	
H.1.3	11.000	480	418	360	298	240		●	
H.1.4									
H.2.1	22.000	1000	870	750	620	500		●	
H.3.1	15.000	500	435	375	310	250		●	
O.1.1	25.000	1500	1305	1125	930	750	●	○	○
O.1.2	22.000	1320	1148	990	818	660	●	○	○
O.2.1	15.000	660	574	495	409	330	●	○	○
O.2.2	15.000	660	574	495	409	330	●	○	○
O.3.1									

Cutting data standard values – Micro cutter – 10xDC


		52 802 ... / 52 804 ... / 52 806 ...															
		Ø DC = 0,2–0,4 mm				Ø DC = 0,5–0,7 mm					Ø DC = 0,8–0,9 mm				Ø DC = 1,0–1,4 mm			
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC
	$a_{p\,max.}$	0,006	0,006	0,006	0,006	0,015	0,015	0,015	0,015	$a_{p\,max.}$	0,024	0,024	0,024	0,024	0,03	0,03	0,03	0,03
	$n_{min.}$	30.000				12.000				$n_{min.}$	8.000				6.500			
Index	n	v_f mm/min.				v_f mm/min.				n	v_f mm/min.				v_f mm/min.			
P.1.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.3	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.1.4	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.1.5	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.2.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.2.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.2.3	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.2.4	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.3.1	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.3.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.3.3	50.000	201	175	151	125	190	165	142	118	25.000	300	261	225	186	335	292	252	208
P.4.1	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
P.4.2	50.000	232	202	174	144	274	238	205	170	38.000	450	392	338	279	589	512	442	365
M.1.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
M.2.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
M.3.1	50.000	155	135	116	96	219	191	164	136	25.000	312	271	234	193	387	337	290	240
K.1.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.1.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.2.1	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.2.2	50.000	232	202	174	144	274	238	205	170	44.000	485	422	364	301	682	593	511	423
K.3.1	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
K.3.2	50.000	141	123	106	88	150	131	113	93	19.000	215	187	161	133	269	234	202	167
N.1.1	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
N.1.2	50.000	232	202	174	144	438	381	329	272	50.000	693	603	520	430	930	809	697	576
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	50.000	232	202	174	144	274	238	205	170	31.000	402	350	301	249	480	418	360	298
N.3.2	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
N.3.3	50.000	232	202	174	144	274	238	205	170	44.000	416	362	312	258	542	472	407	336
N.4.1	50.000	212	185	159	132	300	261	225	186	44.000	506	440	379	314	742	646	557	460
S.1.1	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.1.2	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.2.1	50.000	54	47	40	33	63	55	47	39	19.000	102	89	76	63	126	110	95	78
S.2.2	50.000	46	40	35	29	55	48	41	34	12.000	69	60	51	43	88	76	66	54
S.2.3	50.000	46	40	35	29	55	48	41	34	12.000	59	51	44	36	82	71	62	51
S.3.1	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	141	123	106	88
S.3.2	50.000	60	52	45	37	71	62	53	44	31.000	101	88	76	63	177	154	133	110
S.3.3	50.000	60	52	45	37	71	62	53	44	25.000	89	77	66	55	141	123	106	88
H.1.1	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
H.1.2	50.000	47	41	36	29	67	58	50	42	19.000	90	78	68	56	101	88	75	62
H.1.3	50.000	45	39	34	28	63	55	47	39	19.000	85	74	64	53	95	83	71	59
H.1.4																		
H.2.1	50.000	77	67	58	48	82	71	62	51	38.000	173	151	130	107	194	168	145	120
H.3.1	50.000	47	41	36	29	67	58	50	42	25.000	90	78	68	56	101	88	75	62
O.1.1	50.000	232	202	174	144	329	286	246	204	44.000	554	482	416	344	813	708	610	504
O.1.2	50.000	232	202	174	144	329	286	246	204	38.000	554	482	416	344	705	613	529	437
O.2.1	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
O.2.2	50.000	141	123	106	88	200	174	150	124	25.000	285	248	213	176	339	295	255	210
O.3.1																		


a_e = 0,6–1,0 x DC: Missing values only trochodial slotting and milling is recommended. Otherwise there is the risk of tool breakage.

		52 802 ... / 52 804 ... / 52 806 ...														● 1st choice ○ suitable		
		Ø DC = 1,5–1,7 mm					Ø DC = 1,8–1,9 mm					Ø DC = 2,0 mm						
	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC	a_e	0,1 x DC	0,2 x DC	0,3 x DC	0,4 x DC			
	$a_{p\,max.}$	0,06	0,06	0,06	0,06	$a_{p\,max.}$	0,072	0,072	0,072	0,072	$a_{p\,max.}$	0,08	0,08	0,08	0,08			
	$n_{min.}$	6.500				$n_{min.}$	5.500				$n_{min.}$	5.000						
Index	n	v_f mm/min.				n	v_f mm/min.				n	v_f mm/min.				Emulsion	Compressed air	MMS
P.1.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.3	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707	●	○	○
P.1.4	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446	●	○	○
P.1.5	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446	●	○	○
P.2.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.2.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.2.3	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.2.4	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.3.1	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.3.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.3.3	16.000	554	482	416	344	14.000	680	592	510	422	12.000	720	626	540	446		●	○
P.4.1	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
P.4.2	25.000	1000	870	750	620	22.000	1080	940	810	670	19.000	1140	992	855	707		●	○
M.1.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
M.2.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
M.3.1	16.000	600	522	450	372	14.000	650	566	488	403	12.000	720	626	540	446	●		○
K.1.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.1.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.2.1	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.2.2	29.000	1160	1009	870	719	25.000	1240	1079	930	769	22.000	1320	1148	990	818	○	●	
K.3.1	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	
K.3.2	12.000	329	286	246	204	10.000	380	331	285	236	9.000	390	339	293	242		●	
N.1.1	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042	●		○
N.1.2	38.000	1520	1322	1140	942	33.000	1600	1392	1200	992	28.000	1680	1462	1260	1042	●		○
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	21.000	800	696	600	496	18.000	850	740	638	527	15.000	900	783	675	558	●		○
N.3.2	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707	●		○
N.3.3	29.000	900	783	675	558	25.000	1000	870	750	620	22.000	1140	992	855	707	●		○
N.4.1	29.000	1059	921	794	657	25.000	1200	1044	900	744	22.000	1320	1148	990	818	●		○
S.1.1	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.1.2	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.2.1	12.000	204	178	153	127	10.000	300	261	225	186	9.000	350	305	263	217	●		○
S.2.2	8.000	127	111	95	79	7.000	220	191	165	136	6.000	250	218	188	155	●		○
S.2.3	8.000	106	92	80	66	7.000	200	174	150	124	6.000	220	191	165	136	●		○
S.3.1	21.000	228	199	171	141	18.000	300	261	225	186	15.000	380	331	285	236	●		○
S.3.2	21.000	274	238	205	170	18.000	400	348	300	248	15.000	450	392	338	279	●		○
S.3.3	16.000	237	206	178	147	14.000	300	261	225	186	12.000	380	331	285	236	●		○
H.1.1	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
H.1.2	12.000	173	151	130	107	10.000	200	174	150	124	9.000	240	209	180	149		●	
H.1.3	12.000	163	142	122	101	10.000	200	174	150	124	9.000	240	209	180	149		●	
H.1.4																		
H.2.1	25.000	300	261	225	186	21.000	400	348	300	248	19.000	500	435	375	310		●	
H.3.1	16.000	173	151	130	107	14.000	200	174	150	124	12.000	240	209	180	149		●	
O.1.1	29.000	1160	1009	870	719	25.000	1200	1044	900	744	22.000	1320	1148	990	818	●	○	○
O.1.2	25.000	1000	870	750	620	18.000	1000	870	750	620	19.000	1140	992	855	707	●	○	○
O.2.1	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322	●	○	○
O.2.2	16.000	438	381	329	272	14.000	500	435	375	310	12.000	520	452	390	322	●	○	○
O.3.1																		

SilverLine – End milling cutter

N | λ_s=30° γ_s=14° | ZEFP | HPC



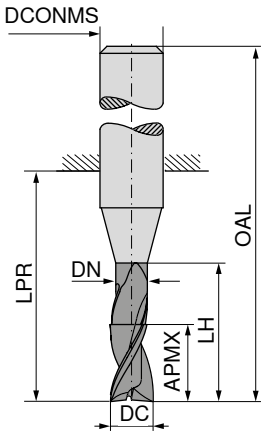

NEW

DPB72S

DRAGONSKIN



≈DIN 6527

HB

50 558 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0	
3,0	8	2,8	15	21	57	6	2	39,99	**03200**
3,5	11	3,3	15	21	57	6	2	39,99	**03700**
4,0	11	3,8	15	21	57	6	2	39,99	**04200**
4,5	13	4,3	21	21	57	6	2	39,99	**04700**
5,0	13	4,8	21	21	57	6	2	39,99	**05200**
5,5	13	5,3	21	21	57	6	2	39,99	**05700**
6,0	13	5,8	21	21	57	6	2	39,99	**06200**
7,0	16	6,8	27	27	63	8	2	46,58	**07200**
8,0	19	7,8	27	27	63	8	2	46,58	**08200**
9,0	19	8,8	32	32	72	10	2	64,82	**09200**
10,0	22	9,8	32	32	72	10	2	64,82	**10200**
11,0	26	10,8	38	38	83	12	2	93,92	**11200**
12,0	26	11,8	38	38	83	12	2	93,92	**12200**
14,0	26	13,8	38	38	83	14	2	117,10	**14200**
15,0	32	14,7	44	44	92	16	2	151,80	**15200**
16,0	32	15,7	44	44	92	16	2	151,80	**16200**
17,0	32	16,7	44	44	92	18	2	184,40	**17200**
18,0	32	17,7	44	44	92	18	2	184,40	**18200**
19,0	38	18,7	54	54	104	20	2	228,20	**19200**
20,0	38	19,7	54	54	104	20	2	228,20	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – SilverLine – End mill

			50 558 ...																		
	Type long		Ø DC = 3,0			Ø DC = 3,5–4,0 mm			Ø DC = 4,5–5,0 mm			Ø DC = 5,5–6,0 mm			Ø DC = 7,0–8,0 mm			Ø DC = 9,0–10,0mm		
			a_o 0,1–0,2 x DC	a_o 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_o 0,1–0,2 x DC	a_o 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_o 0,1–0,2 x DC	a_o 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_o 0,1–0,2 x DC	a_o 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_o 0,1–0,2 x DC	a_o 0,3–0,4 x DC	a_e 0,6–1,0 x DC	a_o 0,1–0,2 x DC	a_o 0,3–0,4 x DC	a_e 0,6–1,0 x DC
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm		
P.1.1	110	1,0*	0,035	0,028	0,018	0,042	0,034	0,021	0,050	0,040	0,025	0,058	0,046	0,029	0,072	0,058	0,036	0,086	0,069	0,043
P.1.2	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.3	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.4	80	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.1.5	80	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.1	90	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.2	70	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.3	70	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.2.4	55	1,0*	0,027	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,048	0,038	0,024	0,062	0,050	0,031	0,075	0,060	0,038
P.3.1																				
P.3.2																				
P.3.3																				
P.4.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
P.4.2	40	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.1.1	40	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.2.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
M.3.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
K.1.1	130	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.1.2	120	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.2.1	130	1,0*	0,040	0,032	0,020	0,048	0,038	0,024	0,056	0,045	0,028	0,064	0,051	0,032	0,079	0,063	0,040	0,095	0,076	0,048
K.2.2	120	1,0*	0,040	0,032	0,020	0,048	0,038	0,024	0,056	0,045	0,028	0,064	0,051	0,032	0,079	0,063	0,040	0,095	0,076	0,048
K.3.1	130	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
K.3.2	120	1,0*	0,056	0,045	0,028	0,068	0,054	0,034	0,080	0,064	0,040	0,092	0,074	0,046	0,116	0,093	0,058	0,140	0,112	0,070
N.1.1																				
N.1.2																				
N.2.1																				
N.2.2																				
N.2.3																				
N.3.1	200	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.3.2	200	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.3.3	140	1,0*	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,070	0,056	0,035	0,090	0,072	0,045	0,110	0,088	0,055
N.4.1																				
S.1.1	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.1.2	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.1	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.2	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.2.3	30	1,0*	0,015	0,012	0,008	0,020	0,016	0,010	0,025	0,020	0,013	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025
S.3.1	50	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
S.3.2	20	1,0*	0,022	0,018	0,011	0,028	0,022	0,014	0,034	0,027	0,017	0,041	0,033	0,021	0,054	0,043	0,027	0,066	0,053	0,033
S.3.3																				
H.1.1																				
H.1.2																				
H.1.3																				
H.1.4																				
H.2.1																				
H.3.1																				
O.1.1																				
O.1.2																				
O.2.1																				
O.2.2																				
O.3.1																				

* = long version: $a_{p\,max.}$ = 1.5 x DC at f_z x 0.75

Plunging angle for ramping and helical milling = 6-10°

	50 558 ...																	
	Ø DC = 11,0–12,0 mm			Ø DC = 14,0 mm			Ø DC = 15,0–16,0 mm			Ø DC = 17,0–18,0 mm			Ø DC = 19,0–20,0 mm			○ 1st choice		
																● suitable		
	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_p 0,6–1,0 x DC	Emulsion	Compressed air	MMS
Index	f_z mm																	
P.1.1	0,102	0,082	0,051	0,116	0,093	0,058	0,124	0,099	0,062	0,131	0,105	0,066	0,139	0,111	0,070	●	○	○
P.1.2	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.3	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.4	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.1.5	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.1	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.2	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.3	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.2.4	0,089	0,071	0,045	0,103	0,082	0,052	0,110	0,088	0,055	0,117	0,094	0,059	0,123	0,098	0,062	●	○	○
P.3.1																●	○	○
P.3.2																		
P.3.3																		
P.4.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
P.4.2	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.1.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.2.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
M.3.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
K.1.1	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.1.2	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.2.1	0,110	0,088	0,055	0,126	0,101	0,063	0,134	0,107	0,067	0,142	0,114	0,071	0,150	0,120	0,075	●	○	○
K.2.2	0,110	0,088	0,055	0,126	0,101	0,063	0,134	0,107	0,067	0,142	0,114	0,071	0,150	0,120	0,075	●	○	○
K.3.1	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
K.3.2	0,164	0,131	0,082	0,188	0,150	0,094	0,200	0,160	0,100	0,212	0,170	0,106	0,224	0,179	0,112	●	○	○
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.3.2	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.3.3	0,130	0,104	0,065	0,150	0,120	0,075	0,160	0,128	0,080	0,170	0,136	0,085	0,180	0,144	0,090	●		
N.4.1																		
S.1.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.1.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.1	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.2	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.2.3	0,060	0,048	0,030	0,070	0,056	0,035	0,075	0,060	0,038	0,079	0,063	0,040	0,084	0,067	0,042	●		
S.3.1	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
S.3.2	0,079	0,063	0,040	0,092	0,074	0,046	0,099	0,079	0,050	0,105	0,084	0,053	0,111	0,089	0,056	●		
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

SilverLine – End milling cutter

N


λ_s=37°
γ_s= 9°


ZEFP

HPC





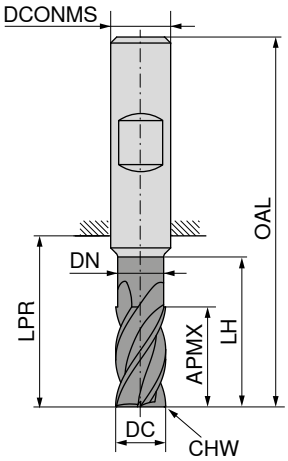

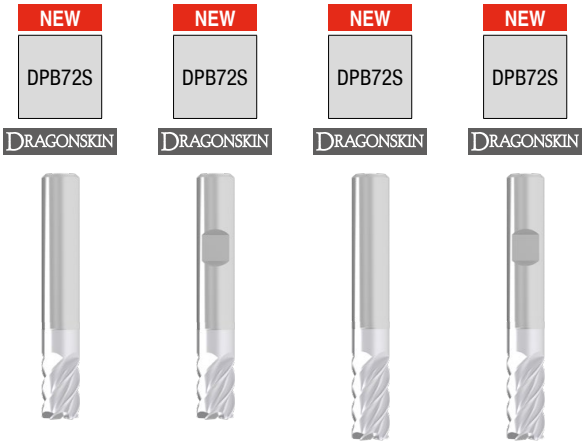



≈DIN 6527

HA

50 993 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V0	
6	10			18	54	6	0,1	5	43,59	**06100**
6	13	5,8	19	21	57	6	0,1	5		
8	12			22	58	8	0,2	5	57,96	**08100**
8	21	7,7	25	27	63	8	0,2	5		
10	14			26	66	10	0,2	5	75,63	**10100**
10	22	9,7	30	32	72	10	0,2	5		
12	16			28	73	12	0,3	5	119,60	**12100**
12	26	11,6	36	38	83	12	0,3	5		
16	22			34	82	16	0,3	5	189,80	**16100**
16	36	15,5	42	44	92	16	0,3	5		
20	26			42	92	20	0,3	5	292,80	**20100**
20	41	19,5	52	54	104	20	0,3	5		

P	●
M	●
K	●
N	○
S	●
H	
O	

≈DIN 6527

HB

50 995 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V0	
6	10			18	54	6	0,1	5	43,59	**06100**
6	13	5,8	19	21	57	6	0,1	5		
8	12			22	58	8	0,2	5	57,96	**08100**
8	21	7,7	25	27	63	8	0,2	5		
10	14			26	66	10	0,2	5	75,63	**10100**
10	22	9,7	30	32	72	10	0,2	5		
12	16			28	73	12	0,3	5	119,60	**12100**
12	26	11,6	36	38	83	12	0,3	5		
16	22			34	82	16	0,3	5	189,80	**16100**
16	36	15,5	42	44	92	16	0,3	5		
20	26			42	92	20	0,3	5	292,80	**20100**
20	41	19,5	52	54	104	20	0,3	5		

P	●
M	●
K	●
N	○
S	●
H	
O	

≈DIN 6527

HA

50 994 ...

DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V0	
6	13	5,8	19	21	57	6	0,1	5	43,22	**06200**
8	21	7,7	25	27	63	8	0,2	5	58,95	**08200**
10	22	9,7	30	32	72	10	0,2	5	86,29	**10200**
12	26	11,6	36	38	83	12	0,3	5	105,00	**12200**
16	36	15,5	42	44	92	16	0,3	5	243,90	**16200**
20	41	19,5	52	54	104	20	0,3	5	333,80	**20200**

P	●
M	●
K	●
N	○
S	●
H	
O	

≈DIN 6527

HB


50 996 ...


DC e8 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	EUR V0	
6	13	5,8	19	21	57	6	0,1	5	43,22	**06200**
8	21	7,7	25	27	63	8	0,2	5	58,95	**08200**
10	22	9,7	30	32	72	10	0,2	5	86,29	**10200**
12	26	11,6	36	38	83	12	0,3	5	105,00	**12200**
16	36	15,5	42	44	92	16	0,3	5	243,90	**16200**
20	41	19,5	52	54	104	20	0,3	5	333,80	**20200**


P	●
M	●
K	●
N	○
S	●
H	
O	

SilverLine – End milling cutter

▲ Cutting depth: 3 x DC

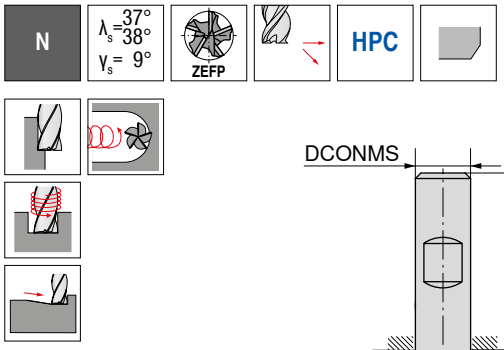

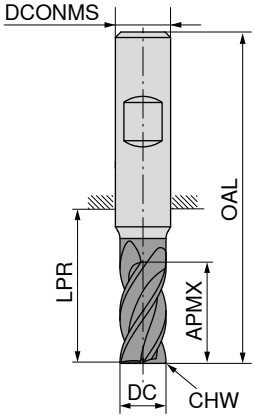

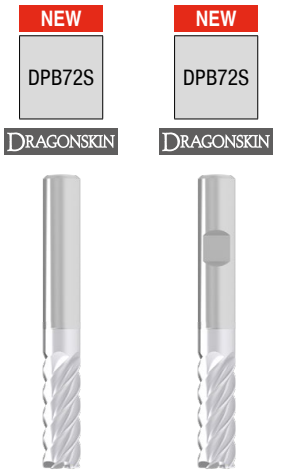






DC e8 mm	APMX mm	LPR mm	OAL mm	DCONMS h6 mm	CHW mm	ZEFP	≈DIN 6527 HA 50 999 ... EUR V0		≈DIN 6527 HB 50 949 ... EUR V0	
6	19	26	62	6	0,1	5	51,86	**06200**	51,86	**06200**
8	25	32	68	8	0,2	5	70,74	**08200**	70,74	**08200**
10	31	40	80	10	0,2	5	103,60	**10200**	103,60	**10200**
12	37	48	93	12	0,3	5	126,00	**12200**	126,00	**12200**
16	49	60	108	16	0,3	5	292,70	**16200**	292,70	**16200**
20	61	76	126	20	0,3	5	400,50	**20200**	400,50	**20200**
P							●		●	
M							●		●	
K							●		●	
N							o		o	
S							●		●	
H										
O										

SilverLine – End milling cutter with corner radius

N | λ_s=37° γ_s= 9° λ_s=38° | ZEFP | HPC



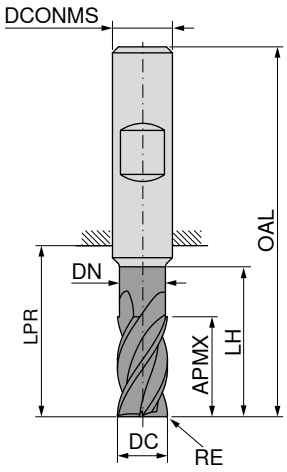

NEW DPB72S DRAGONSKIN



NEW DPB72S DRAGONSKIN





Factory standard

HA



50 997 ...



Factory standard

HB



50 998 ...

DC e8 mm	RE ±0,01 mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS h6 mm	ZEFP	EUR V0		EUR V0	
6	0,2	13	5,8	19	21	57	6	5	62,18	06202	62,18	06202
6	0,5	13	5,8	19	21	57	6	5	62,18	06205	62,18	06205
6	1,0	13	5,8	19	21	57	6	5	62,18	06210	62,18	06210
8	0,2	21	7,7	25	27	63	8	5	77,98	08202	77,98	08202
8	0,5	21	7,7	25	27	63	8	5	77,98	08205	77,98	08205
8	1,0	21	7,7	25	27	63	8	5	77,98	08210	77,98	08210
8	1,5	21	7,7	25	27	63	8	5	77,98	08215	77,98	08215
10	0,2	22	9,7	30	32	72	10	5	97,43	10202	97,43	10202
10	0,5	22	9,7	30	32	72	10	5	97,43	10205	97,43	10205
10	1,0	22	9,7	30	32	72	10	5	97,43	10210	97,43	10210
10	1,5	22	9,7	30	32	72	10	5	97,43	10215	97,43	10215
10	1,6	22	9,7	30	32	72	10	5	97,43	10216	97,43	10216
10	2,0	22	9,7	30	32	72	10	5	97,43	10220	97,43	10220
12	0,3	26	11,6	36	38	83	12	5	150,50	12203	150,50	12203
12	0,5	26	11,6	36	38	83	12	5	150,50	12205	150,50	12205
12	1,0	26	11,6	36	38	83	12	5	150,50	12210	150,50	12210
12	1,5	26	11,6	36	38	83	12	5	150,50	12215	150,50	12215
12	1,6	26	11,6	36	38	83	12	5	150,50	12216	150,50	12216
12	2,0	26	11,6	36	38	83	12	5	150,50	12220	150,50	12220
12	2,5	26	11,6	36	38	83	12	5	150,50	12225	150,50	12225
16	0,3	36	15,5	42	44	92	16	5	227,50	16203	227,50	16203
16	0,5	36	15,5	42	44	92	16	5	227,50	16205	227,50	16205
16	1,0	36	15,5	42	44	92	16	5	227,50	16210	227,50	16210
16	1,5	36	15,5	42	44	92	16	5	227,50	16215	227,50	16215
16	1,6	36	15,5	42	44	92	16	5	227,50	16216	227,50	16216
16	2,0	36	15,5	42	44	92	16	5	227,50	16220	227,50	16220
16	2,5	36	15,5	42	44	92	16	5	227,50	16225	227,50	16225
16	3,0	36	15,5	42	44	92	16	5	227,50	16230	227,50	16230
20	0,3	41	19,5	52	54	104	20	5	340,80	20203	340,80	20203
20	0,5	41	19,5	52	54	104	20	5	340,80	20205	340,80	20205
20	1,0	41	19,5	52	54	104	20	5	340,80	20210	340,80	20210
20	1,5	41	19,5	52	54	104	20	5	340,80	20215	340,80	20215
20	1,6	41	19,5	52	54	104	20	5	340,80	20216	340,80	20216
20	2,0	41	19,5	52	54	104	20	5	340,80	20220	340,80	20220
20	2,5	41	19,5	52	54	104	20	5	340,80	20225	340,80	20225
20	3,0	41	19,5	52	54	104	20	5	340,80	20230	340,80	20230
20	4,0	41	19,5	52	54	104	20	5	340,80	20240	340,80	20240

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment		Tensile strength N/mm²* / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C	Annealed	420 N/mm² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C	Annealed	640 N/mm² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3		Tempered	840 N/mm² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C	Annealed	910 N/mm² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5		Tempered	1010 N/mm² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1		Annealed	610 N/mm² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2		Tempered	930 N/mm² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3		Tempered	1010 N/mm² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4		Tempered	1200 N/mm² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1		Annealed	680 N/mm² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2		Hardened and tempered	1100 N/mm² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3		Hardened and tempered	1300 N/mm² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic	Annealed	680 N/mm² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic	Tempered	1010 N/mm² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic	Quenched	610 N/mm² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic	Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)		780 N/mm² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic		350 N/mm² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)		500 N/mm² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic		540 N/mm² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic		845 N/mm² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic		440 N/mm² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic		780 N/mm² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable		60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable	Age-hardened	340 N/mm² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable		250 N/mm² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable	Age-hardened	300 N/mm² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable		440 N/mm² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %		375 N/mm² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn		300 N/mm² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper		340 N/mm² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys		70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
S	Heat-resistant alloys	S.1.1	Fe - basis	Annealed	680 N/mm² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865	G-X40NiCrSi38-18
		S.1.2		Age-hardened	950 N/mm² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
		S.2.1	Ni or Co basis	Annealed	840 N/mm² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
		S.2.2		Age-hardened	1180 N/mm² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
		S.2.3		Cast	1080 N/mm² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
	Titanium alloys	S.3.1	Pure titanium		400 N/mm²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys	Age-hardened	1050 N/mm² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
		S.3.3	Beta alloys		1400 N/mm² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al
H	Hardened steel	H.1.1		Hardened and tempered	46–55 HRC				
		H.1.2		Hardened and tempered	56–60 HRC				
		H.1.3		Hardened and tempered	61–65 HRC				
		H.1.4		Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1		Cast	400 HB				
	Hardened cast iron	H.3.1		Hardened and tempered	55 HRC				
O	Non-metal materials	O.1.1	Plastics, duroplastic		≤ 150 N/mm²				
		O.1.2	Plastics, thermoplastic		≤ 100 N/mm²				
		O.2.1	Aramid fibre-reinforced		≤ 1000 N/mm²				
		O.2.2	Glass/carbon-fibre reinforced		≤ 1000 N/mm²				
		O.3.1	Graphite						

*** Tensile strength**

Cutting data standard values – SilverLine – End mill

			50 993 ... / 50 994 ... / 50 995 ... / 50 996 ... / 50 997 ... / 50 998 ...																		○ 1st choice		
	Type short / long		Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm			● suitable		
			a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	Emulsion	Compressed air	MMS
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm			f_z mm			f_z mm			f_z mm			f_z mm			f_z mm					
P.1.1	205	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.2	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.3	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.4	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.5	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.1	200	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.2	190	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.3	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.4	170	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.1	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.2	170	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.3	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.4.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	100	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	200	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.1.2	180	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.2.1	190	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.2	170	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.1	180	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.2	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1	315	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.2	315	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.3	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.4.1																							
S.1.1	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	25	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	80	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

Plunging angle for ramping and helical milling = 2-3°

Cutting data standard values – SilverLine – End mill

			50 949 ... / 50 999 ...																			○ 1st choice		
			Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm			Ø DC = 16 mm			Ø DC = 20 mm			● suitable		
	Type long		a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	a_p 0,1–0,2 x DC	a_p 0,3–0,4 x DC	a_e 0,6 x DC	Emulsion	Compressed air	MMS
Index	v_c m/min	$a_{p\,max}$ x DC	f_z mm																					
P.1.1	165	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.2	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.3	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.4	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.1.5	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.1	160	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.2	150	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.2.3	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.2.4	135	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●	○	○
P.3.1	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.2	135	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.3.3	115	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
P.4.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
P.4.2	65	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.1.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.2.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
M.3.1	80	1,0	0,038	0,030	0,019	0,052	0,042	0,026	0,066	0,053	0,033	0,080	0,064	0,040	0,101	0,081	0,051	0,115	0,092	0,058	●		
K.1.1	160	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.1.2	145	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
K.2.1	150	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.2.2	135	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.1	145	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
K.3.2	130	1,0	0,070	0,056	0,035	0,094	0,075	0,047	0,116	0,093	0,058	0,140	0,112	0,070	0,173	0,138	0,087	0,196	0,157	0,098	●	○	○
N.1.1																							
N.1.2																							
N.2.1																							
N.2.2																							
N.2.3																							
N.3.1	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.2	250	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.3.3	200	1,0	0,094	0,075	0,047	0,126	0,101	0,063	0,160	0,128	0,080	0,192	0,154	0,096	0,240	0,192	0,120	0,274	0,219	0,137	●	○	○
N.4.1																							
S.1.1	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.1.2	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.1	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.2	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.2.3	20	1,0	0,030	0,024	0,015	0,040	0,032	0,020	0,050	0,040	0,025	0,060	0,048	0,030	0,075	0,060	0,038	0,084	0,067	0,042	●		
S.3.1	65	1,0	0,060	0,048	0,030	0,080	0,064	0,040	0,100	0,080	0,050	0,120	0,096	0,060	0,150	0,120	0,075	0,170	0,136	0,085	●		
S.3.2																							
S.3.3																							
H.1.1																							
H.1.2																							
H.1.3																							
H.1.4																							
H.2.1																							
H.3.1																							
O.1.1																							
O.1.2																							
O.2.1																							
O.2.2																							
O.3.1																							

Plunging angle for ramping and helical milling = 2-3°

Cutting data standard values – SilverLine – End mills – Trochoidal machining

			50 949 ... / 50 999 ...															
	Type long		Ø DC = 6 mm				Ø DC = 8 mm				Ø DC = 10 mm				Ø DC = 12 mm			
			a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m
Index	v_c m/min	max. angle of engagement	f_z mm				f_z mm				f_z mm				f_z mm			
P.1.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.1.2	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.3	280	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.1.5	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.1	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.2	280	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
P.2.3	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.2.4	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.1	220	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.2	220	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.3.3	200	45°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
P.4.1	180	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
P.4.2	160	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.1.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.2.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
M.3.1	140	45°	0,09	0,07	0,05	0,021	0,11	0,08	0,07	0,026	0,14	0,10	0,08	0,031	0,16	0,11	0,09	0,035
K.1.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.1.2	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.1	300	50°	0,15	0,10	0,09	0,033	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045	0,23	0,16	0,13	0,051
K.2.2	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.1	260	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
K.3.2	200	50°	0,11	0,08	0,07	0,025	0,14	0,10	0,08	0,032	0,17	0,12	0,10	0,039	0,20	0,14	0,12	0,045
N.1.1																		
N.1.2																		
N.2.1																		
N.2.2																		
N.2.3																		
N.3.1																		
N.3.2																		
N.3.3																		
N.4.1																		
S.1.1	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.1.2	80	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.1	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.2	60	40°	0,05	0,03	0,03	0,010	0,06	0,04	0,04	0,014	0,08	0,05	0,04	0,017	0,09	0,06	0,05	0,021
S.2.3																		
S.3.1	140	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.2	100	40°	0,06	0,04	0,04	0,014	0,08	0,06	0,05	0,018	0,10	0,07	0,06	0,023	0,12	0,09	0,07	0,028
S.3.3																		
H.1.1																		
H.1.2																		
H.1.3																		
H.1.4																		
H.2.1																		
H.3.1																		
O.1.1																		
O.1.2																		
O.2.1																		
O.2.2																		
O.3.1																		

Plunging angle for ramping and helical milling = 2-3°


Cutting depth corresponding to the cutting length

	50 949 ... / 50 999 ...								○ 1st choice ● suitable		
	Ø DC = 16 mm				Ø DC = 20 mm						
Index	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	a_e 0,05 x DC	a_e 0,1 x DC	a_e 0,15 x DC	h_m	Emulsion	Compressed air	MMS
	f_z mm				f_z mm						
P.1.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.1.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.4	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.1.5	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.2.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.2.2	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
P.2.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.2.4	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.1	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.3.3	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
P.4.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
P.4.2	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.1.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.2.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
M.3.1	0,19	0,13	0,11	0,042	0,21	0,15	0,12	0,047	●		
K.1.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.1.2	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.2.1	0,27	0,19	0,16	0,060	0,30	0,21	0,17	0,066	○	●	○
K.2.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
K.3.1	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
K.3.2	0,25	0,18	0,14	0,055	0,28	0,20	0,16	0,062	○	●	○
N.1.1											
N.1.2											
N.2.1											
N.2.2											
N.2.3											
N.3.1											
N.3.2											
N.3.3											
N.4.1											
S.1.1	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.1.2	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.1	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.2	0,11	0,08	0,07	0,026	0,13	0,09	0,08	0,029	●		
S.2.3											
S.3.1	0,16	0,11	0,09	0,035	0,18	0,12	0,10	0,040	●		
S.3.2	0,16	0,11	0,09	0,035	0,18	0,12	0,10	0,040	●		
S.3.3											
H.1.1											
H.1.2											
H.1.3											
H.1.4											
H.2.1											
H.3.1											
O.1.1											
O.1.2											
O.2.1											
O.2.2											
O.3.1											

HDC – Heavy Duty Chuck
“The precision collet chuck for heavy-duty machining”

Pull-out of milling cutters is an issue that every machine operator is familiar with. Our tools are being constantly further refined and becoming ever more powerful. Adapters are therefore becoming increasingly important and must be able to cope with these forces. The clamping forces in particular play a major role here. These should counter pull-out of the tool and ensure reliable machining. The well-known Weldon chuck is still a popular clamping device, but brings with it some disadvantages in terms of flexibility, damping and accuracy.

CERATIZIT is expanding its product range to include a chuck specially developed for heavy-duty machining/rough machining, known as the **HDC** – **H**eavy **D**uty **C**huck. This is a precision collet chuck, the focus of which is on excellent damping and a stable chuck body. The HDC is a universal precision collet chuck for everything from finishing and roughing operations through to trochoidal milling or process-secure machining of high strength, extremely tough materials.

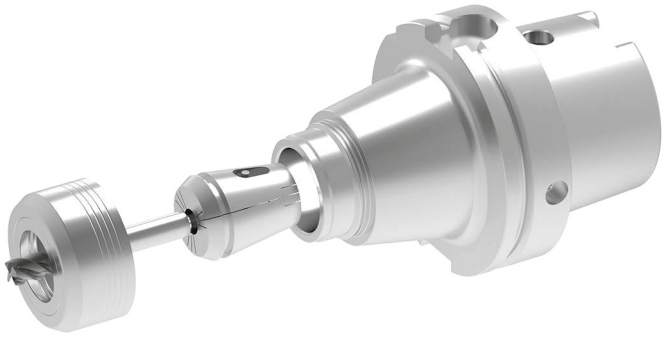


Advantages of the HDC chuck:


- Optimum clamping force, so that the collet cannot turn in its seat
- Stable base body design for the fewest possible vibrations
- Maximum damping so that vibrations can be effectively suppressed
- Runout accuracy ≤ 3 µm at 3xD overhang length

Maximum performance thanks to angular contact ball bearings:

Despite excellent damping properties, the disadvantages of ball-bearing lock nuts have always outweighed the advantages - until now. The HDC lock nut with its specially developed and patent-pending angular contact ball bearings is the first to do away with these weaknesses.



Conventional deep-groove ball bearings: positive engagement during clamping (red) or release (blue)



Angular ball bearings for the HDC-chuck: positive engagement during clamping (red) or release (blue)

The unique arrangement of the bearing shells allows for:


- The use of balls with a considerably smaller diameter. This doubles the number of balls and increases the resulting contact surface. The surface pressure decreases accordingly and indenting into the raceways is reduced.
- Decoupling of the clamping and release function through a special circlip, which absorbs all the (sometimes jerky) forces that occur when opening the nut and pulling out the collet. The bearing shells are not damaged by the application of force during opening.
- The use of fully hardened bearing steel, which, unlike case-hardened steel in other solutions, counteracts embedding of the balls.
- Assembly of the bearing without additional feed opening for the balls. This means that the balls cannot become jammed or move into the feed opening.
- Design of the raceways without interrupting hole. This has a positive effect on the residual imbalance and runout properties.

ER precision collet chuck – HDC


- HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- For heavy duty lock nut
- Maximum clamping range covered according to ISO tolerance field H10
- Roll key required for clamping
- p_{max} = 80 bar
- also available with Balluff chip **on request**

Scope of supply:

Base body **including** lock nut, **without** backstop screw

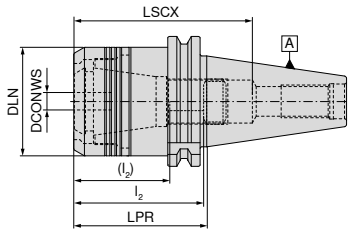

cylindrical



Conical



NEW



AD
G 6,3 n_{max} 18000
cylindrical

NEW



AD
G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	84 400 ... EUR Y8		84 400 ... EUR Y8	
SK 40	2 - 20	65	53	85	41 - 65 (27 - 47)		470E (ER32)	167,90	**12079**		
SK 50	2 - 20	70	53	91	41 - 71 (27 - 53)	10	470E (ER32)			269,90	**12078**
SK 50	2 - 20	100	53	121	41 - 74 (27 - 56)	10	470E (ER32)			315,20	**22078**

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2



Lock nut



Stop screw 2



Stop screw 1

Spare parts DCONWS	84 950 ... EUR Y8			83 950 ... EUR Y8			83 950 ... EUR Y8	
2 - 20	54,59	**30100**	M22x1,5 - SW6	16,38	**402**	M22x1,5 - SW6	11,76	**401**

Accessories



ER collet
→ 256–266



Pull stud
→ 111+112



Others
→ 273

All accessories can be found in our new clamping technology catalogue
→ **Chapter 16, Adapters and accessories**



Roll key
→ 65




Roll key head
→ 65

Both these accessories can be found here in
→ **UP2DATE 07/2021**


ER precision collet chuck – HDC

- HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- For heavy duty lock nut
- Maximum clamping range covered according to ISO tolerance field H10
- Roll key required for clamping
- p_{max} = 80 bar
- also available with Balluff chip **on request**

Scope of supply:
Base body **including** lock nut, **without** backstop screw



cylindrical



Conical



NEW



AD
G 6,3 n_{max} 18000
cylindrical

NEW



AD
G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	84 400 ... EUR Y8		84 400 ... EUR Y8	
BT 40	2 - 20	60	53	80	41 - 63 (27 - 45)		470E (ER32)	174,10	**12069**		
BT 40	2 - 20	90	53	85	41 - 63 (27 - 45)		470E (ER32)	181,30	**22069**		
BT 50	2 - 20	75	53	114	41 - 80 (27 - 62)	10	470E (ER32)			269,90	**12068**
BT 50	2 - 20	105	53	140	41 - 80 (27 - 62)	10	470E (ER32)			315,20	**22068**

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2



Lock nut



Stop screw 2



Stop screw 1

Spare parts DCONWS	84 950 ... EUR Y8			83 950 ... EUR Y8			83 950 ... EUR Y8	
2 - 20	54,59	**30100**	M22x1,5 - SW6	16,38	**402**	M22x1,5 - SW6	11,76	**401**

Accessories



ER collet
→ 256–266



Pull stud
→ 111+112



Others
→ 273

All accessories can be found in our new clamping technology catalogue
→ **Chapter 16, Adapters and accessories**



Roll key
→ 65



Roll key head
→ 65


Both these accessories can be found here in
→ **UP2DATE 07/2021**

ER precision collet chuck – HDC – BT-FC


- HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- For heavy duty lock nut
- Maximum clamping range covered according to ISO tolerance field H10
- Roll key required for clamping
- p_{max} = 80 bar
- also available with Balluff chip **on request**

Scope of supply:

Base body **including** lock nut, **without** backstop screw

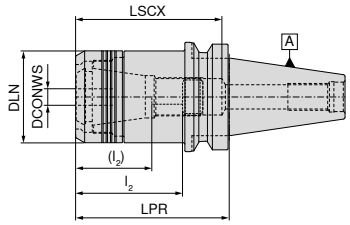

cylindrical



Conical



NEW



AD
G 6,3 n_{max} 18000
cylindrical

NEW



AD
G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet	84 400 ... EUR Y8		84 400 ... EUR Y8	
BT-FC 40	2 - 20	60	53	80	41 - 63 (27 - 45)		470E (ER32)	262,70	**12064**		
BT-FC 40	2 - 20	90	53	95	41 - 65 (27 - 47)		470E (ER32)	269,90	**22064**		
BT-FC 50	2 - 20	75	53	114	41 - 81 (27 - 63)	10	470E (ER32)			437,80	**12063**
BT-FC 50	2 - 20	105	53	144	41 - 81 (27 - 63)	10	470E (ER32)			441,90	**22063**

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2

Accessories



ER collet
→ 256–266



Pull stud
→ 111+112



Others
→ 273

All accessories can be found in our new clamping technology catalogue
→ **Chapter 16, Adapters and accessories**



Roll key
→ 65




Roll key head
→ 65

Both these accessories can be found here in
→ **UP2DATE 07/2021**


ER precision collet chuck – HDC

- HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- For heavy duty lock nut
- Maximum clamping range covered according to ISO tolerance field H10
- Roll key required for clamping
- p_{max} = 80 bar
- also available with Balluff chip **on request**

Scope of supply:
Base body **including** lock nut, **without** backstop screw



cylindrical



Conical



NEW



G 6,3 n_{max} 18000
cylindrical

NEW



G 6,3 n_{max} 18000
conical

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	l_2 (l_2) mm	ALP °	for collet		84 400 ... EUR Y8		84 400 ... EUR Y8	
HSK-A 63	2 - 20	70	53	45	41 - 57 (27 - 39)		470E (ER32)		206,00	**12057**		
HSK-A 63	2 - 20	100	53	72	41 - 57 (27 - 39)		470E (ER32)		206,00	**22057**		
HSK-A 100	2 - 20	100	53	68	41 - 54 (27 - 36)	10	470E (ER32)				342,00	**22055**

LSCX = Clamping depth without backstop screw
l_2 = Clamping depth backstop screw 1, dimension in brackets (l_2) = Clamping depth backstop screw 2



Lock nut



Stop screw 2



Stop screw 1

Spare parts DCONWS	84 950 ... EUR Y8			83 950 ... EUR Y8			83 950 ... EUR Y8	
2 - 20	54,59	**30100**	M22x1,5 - SW6	16,38	**402**	M22x1,5 - SW6	11,76	**401**

Accessories



ER collet
→ 256–266



Others
→ 273

All accessories can be found in our new clamping technology catalogue → **Chapter 16, Adapters and accessories**



Roll key
→ 65



Roll key head
→ 65

Both these accessories can be found here in → **UP2DATE 07/2021**

Accessories/clamping keys for ER precision collet chucks – HDC

Roll key

- Version CP = for Centro-P lock nuts
- Version STD = for standard lock nuts
- Version HDC = for HDC lock nuts



for lock nut	DLN mm	84 950 ... EUR Y8	
470E / ER 32 HDC	53	79,31	**30200**

Additional roll key device for torque key


- Version CP = for Centro-P lock nuts
- Version STD = for standard lock nuts
- Version HDC = for HDC lock nuts



for lock nut	DLN mm	TQX Nm	Square mm	84 950 ... EUR Y8	
470E / ER 32 HDC	53	20 - 200	14 x 18	79,31	**30300**

HSK-T extension

- For mounting HSK-T adapters according to ISO 12164-3
- Also suitable for HSK-A and HSK-C
- Also available with Balluff chip **on request**

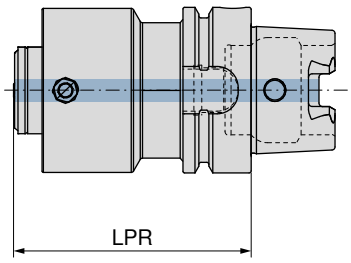



NEW




Adapter	LPR mm	84 621 ... EUR Y8	
HSK-T 63	80	528,90	**08037**
HSK-T 63	120	564,10	**12037**
HSK-T 100	125	705,20	**12535**
HSK-T 100	160	749,30	**16035**
HSK-T 100	200	802,20	**20035**


Hydraulic chuck, short and stable version

- for solid carbide and HSS shanks to h6 tolerance or better
- also available with Balluff chip **on request**

Scope of supply:

Base body with backstop screw and pressure screw

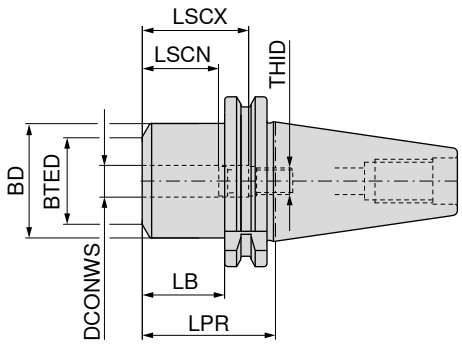

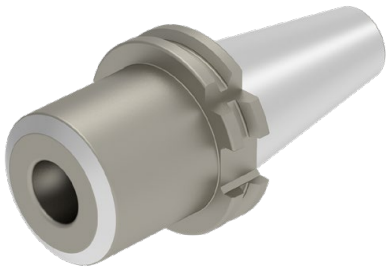

NEW



AD

G 2,5 n_{max} 25000

83 430 ...

Adapter	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCN mm	LSCX mm	THID	EUR Y8	
SK 40	12	50,0	42	32	31,0	46	56	M8x1	156,90	**01279**
SK 40	20	64,5	49	38	45,5	41	51	M16x1	156,90	**02079**
SK 50	20	64,5	49	38	45,5	41	51	M16x1	280,40	**02078**



Pressure screw



Stop screw IK


		83 950 ...			**83 950 ...**	
Spare parts DCONWS		EUR Y7			EUR Y7	
12	M10x1x12	5,64	**440**	M8x1x13,5 - SW3	8,35	**420**
20	M10x1x12	5,64	**440**	M16x1x13,5 - SW8	9,62	**424**


Hydraulic chuck, short and stable version

- for solid carbide and HSS shanks to h6 tolerance or better
- also available with Balluff chip **on request**

Scope of supply:

Base body with backstop screw and pressure screw

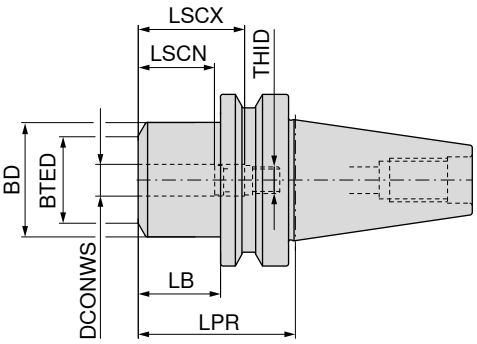

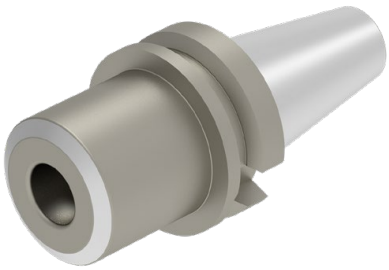

NEW



AD

G 2,5 n_{max} 25000

Adapter	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCN mm	LSCX mm	THID	83 430 ... EUR Y8	
BT 40	12	58,0	42	32	31,0	36	46	M8x1	156,90	**01269**
BT 40	20	72,5	49	38	45,5	41	51	M16x1	156,90	**02069**
BT 50	20	83,5	49	38	45,5	41	51	M16x1	280,40	**02068**



Pressure screw



Stop screw IK


Spare parts DCONWS	83 950 ...	EUR Y7		83 950 ...	EUR Y7	
12	M10x1x12	5,64	**440**	M8x1x13,5 - SW3	8,35	**420**
20	M10x1x12	5,64	**440**	M16x1x13,5 - SW8	9,62	**424**

Hydraulic chuck, short and stable version

- for solid carbide and HSS shanks to h6 tolerance or better
- also available with Balluff chip **on request**

Scope of supply:

Base body with backstop screw and pressure screw

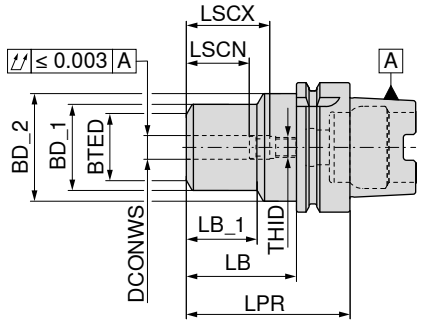



NEW



AD

G 2,5 n_{max} 25000

83 430 ...

Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	BTED mm	LB mm	LB_1 mm	LSCN mm	LSCX mm	THID	EUR Y8	
HSK-A 63	12	80	42	52,5	32	54	34	36	46	M8x1	174,60	**01257**
HSK-A 63	20	80	49	52,5	38	54	36	41	51	M8x1	174,60	**02057**
HSK-A 100	12	85	42	52,5	32	51	34	36	46	M8x1	245,00	**01255**
HSK-A 100	20	85	49	52,5	38	51	36	41	51	M8x1	245,00	**02055**



Pressure screw



Stop screw IK

		83 950 ...			**83 950 ...**	
Spare parts DCONWS		EUR Y7			EUR Y7	
12	M10x1x12	5,64	**440**	M8x1x13,5 - SW3	8,35	**420**
20	M10x1x12	5,64	**440**	M8x1x13,5 - SW3	8,35	**420**

ToolScope

Full process control with ToolScope

Digital monitoring for your production

cutting.tools/ie/en/toolscope


- Process control
- Machine protection
- Documentation & digitalisation



Radial square section tool holder with DirectCooling – B1 / B2 / B3 / B4

- Double tooth profile for normal and overhead applications
- The clamping rails can be attached at the top or bottom (left or right application).
- For turning tool holders with DirectCooling
- Can be used up to 100 bar

NEW

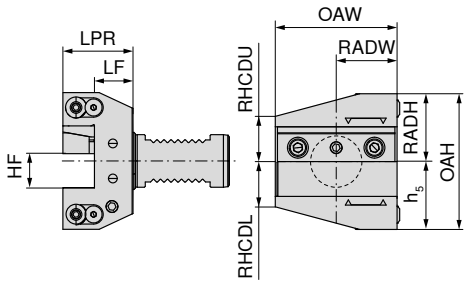



double Direct Cooling


82 245 ...

Adapter	HF $_{0/-0,1}$ mm	LF $_{0/+0,5}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 20	16	16	30	55	30	30,0	30	60	22	22	205,90	**01629**
VDI 20	16	26	40	55	30	30,0	30	60	22	22	205,90	**51629**
VDI 25	16	16	30	55	30	30,0	30	60	22	22	205,90	**01628**
VDI 30	20	22	40	70	39	35,0	39	78	26	26	205,90	**02027**
VDI 40	25	22	44	85	47	42,5	47	94	33	33	242,90	**02526**
VDI 50	25	22	44	98	55	50,0	55	110	42	42	302,60	**02525**

Axial square section tool holder with DirectCooling – C1 / C2 / C3 / C4

- Double tooth profile for normal and overhead applications
- The clamping rails can be attached at the top or bottom (left or right application).
- For turning tool holders with DirectCooling
- Can be used up to 100 bar

NEW

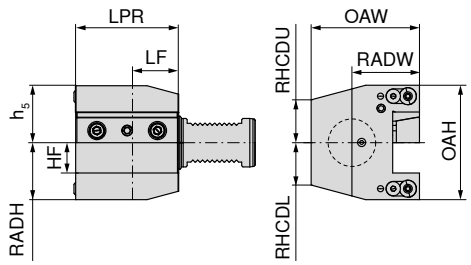



double Direct Cooling


82 246 ...


Adapter	HF $_{0/-0,1}$ mm	LF mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	EUR Y8	
VDI 30	20	30	70	74	39	39,0	39	78	26	26	236,80	**02027**
VDI 40	25	30	85	94	47	52,5	47	94	35	35	282,10	**02526**
VDI 50	25	30	85	105	50	63,0	50	100	42	42	360,30	**02525**

Radial square section tool holder with DirectCooling – B1 / B4

- Double tooth profile for normal and overhead applications
- For turning tool holders with DirectCooling
- Can be used up to 100 bar

NEW



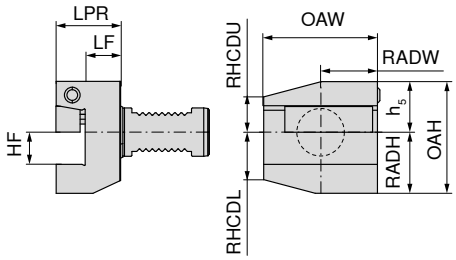

double Direct Cooling


Adapter	HF $_{0/-0,1}$ mm	LF $_{0/+0,5}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	82 247 ... EUR Y8	
VDI 30	20	22	40	70,0	38	35,0	31,5	69,5	29,5	22	158,50	**02027**
VDI 40	25	22	44	85,0	48	42,5	38,0	86,0	35,0	30	187,40	**02526**
VDI 50	25	22	44	92,5	48	50,0	43,0	91,0	43,0	30	232,60	**02525**

Radial square section tool holder with DirectCooling – B2 / B3

- Double tooth profile for normal and overhead applications
- For turning tool holders with DirectCooling
- Can be used up to 100 bar

NEW



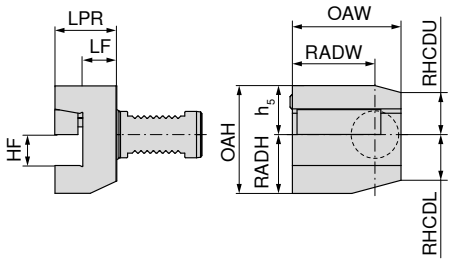


double Direct Cooling

Adapter	HF $_{0/-0,1}$ mm	LF $_{0/+0,5}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	82 247 ... EUR Y8	
VDI 30	20	22	40	70,0	38	35,0	31,5	69,5	29,5	27	158,50	**12027**
VDI 40	25	22	44	85,0	48	42,5	38,0	86,0	35,0	30	187,40	**12526**
VDI 50	25	22	44	92,5	48	50,0	43,0	91,0	35,0	38	232,60	**12525**

Axial square section tool holder with DirectCooling – C1 / C4

- Double tooth profile for normal and overhead applications
- For turning tool holders with DirectCooling
- Can be used up to 100 bar

NEW






double Direct Cooling

Adapter	HF $_{0/-0,1}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	82 248 ... EUR Y8	
VDI 30	20	70	70,0	38	35,0	32	70	26	22	181,20	**02027**
VDI 40	25	85	85,0	48	42,5	38	86	35	30	216,20	**02526**
VDI 50	25	85	90,5	48	48,0	44	92	42	35	275,90	**02525**

Axial square section tool holder with DirectCooling – C2 / C3

- Double tooth profile for normal and overhead applications
- For turning tool holders with DirectCooling
- Can be used up to 100 bar

NEW

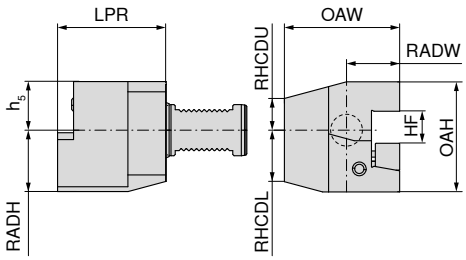





double Direct Cooling


Adapter	HF $_{0/-0,1}$ mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	82 248 ... EUR Y8	
VDI 30	20	70	76	38	41,0	32	70	26	26	181,20	**12027**
VDI 40	25	85	90	48	47,5	38	86	35	30	216,20	**12526**
VDI 50	25	85	95	48	52,5	44	92	42	37	275,90	**12525**

Parting blade holder for parting blades with DirectCooling

- Double tooth profile for normal and overhead applications
- For parting blades with DirectCooling
- Can be used up to 100 bar

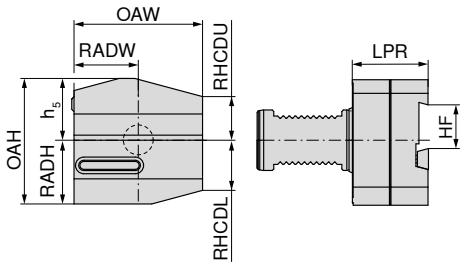

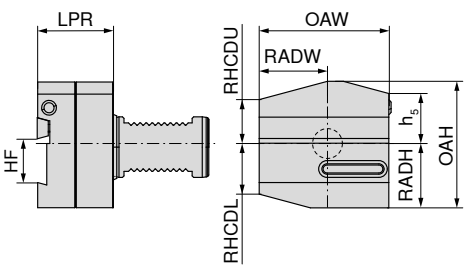




NEW NEW

Direct Cooling Direct Cooling

Adapter	HF mm	LPR mm	OAW mm	RADH mm	RADW mm	h_5 mm	OAH mm	RHCDL mm	RHCDU mm	Left-hand 82 249 ... EUR Y8		Right-hand 82 249 ... EUR Y8	
VDI 30	26	50	70	37	35,0	32	69	30	25	397,40	**12627**	397,40	**02627**
VDI 40	32	50	85	40	42,5	43	83	31	31	446,80	**13226**	446,80	**03226**
VDI 40	26	50	85	40	42,5	43	83	31	31	446,80	**12626**	446,80	**02626**
VDI 50	32	50	100	45	50,0	43	88	37	35	533,20	**13225**	533,20	**03225**

Clamping rail

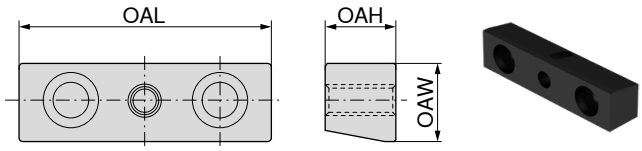


OAL mm	OAW mm	OAH mm	82 250 ... EUR Y8	
53,0	12,7	11,5	11,53	05300
54,0	16,0	15,0	11,53	05400
67,5	16,0	15,0	14,41	06750
68,0	21,0	19,0	14,41	06800
83,0	20,5	19,0	17,29	08300
90,0	20,5	19,0	20,59	09000

Screw for ball-shaped spray nozzle



THOD	82 950 ... EUR Y8	
M3x10	2,26	31000
M4x10	2,26	31300
M5x12	2,88	31100
M6x12	3,50	31200

Clamping wedge

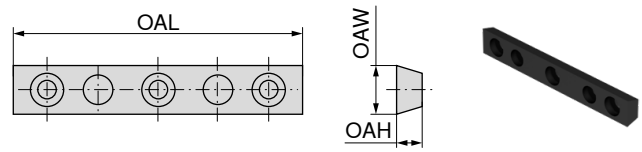


OAL mm	OAW mm	OAH mm	82 250 ... EUR Y8	
70	14	7,3	14,41	07000
85	14	7,3	17,29	08500
100	14	7,3	20,59	10000

Ball-shaped spray nozzle



THID	BD mm	82 950 ... EUR Y8	
M5	8	5,76	30600
M6	10	7,21	30900
M6	12	8,65	30700
M6	14	10,29	30800

Levelling plates

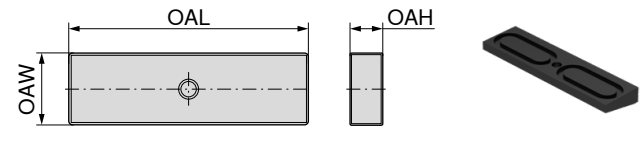

OAL mm	OAW mm	OAH mm	82 250 ... EUR Y8	
53,0	14	6,1	23,06	15300
67,5	18	6,3	28,82	16750
83,0	22	7,5	35,00	18300
90,0	22	7,5	40,35	19000

O ring for clamping wedge



Size	82 950 ... EUR Y8	
Ø13 x Ø2	4,32	32600
Ø18 x Ø2	5,76	32700
Ø22 x Ø2	5,76	32800

O ring for ball-shaped spray nozzle



Size	82 950 ... EUR Y8	
Ø5 x Ø1,5	2,26	31400
Ø7 x Ø1,5	2,26	31700
Ø7 x Ø2,5	2,26	31500
Ø10 x Ø2	2,26	31600

Screw for clamping wedge




THOD	82 950 ... EUR Y8	
M5x12	2,88	31800
M6x16	4,32	32200
M6x20	4,32	31900
M8x20	5,76	32300
M8x25	7,21	32100

Quad ring



Size	82 950 ... EUR Y8	
Ø21,95 x Ø1,78	8,65	32400
Ø28,3 x Ø1,78	10,29	32500

Screw plug for ball-shaped spray nozzle





THOD	OAL mm	82 950 ... EUR Y8	
M5	6	2,47	32900
M6	6	2,47	33000

Doosan/Spinner – BMT 45 – axial square section tool holder

▲ Directly screwed version

NEW

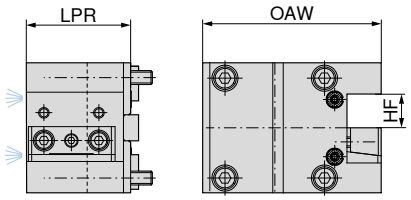




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 480 ... EUR Y7	
BMT 45	58 x 58	20	60	99,5	330,10	**00001**

Doosan/Spinner – BMT 45 – radial square section tool holder

▲ Directly screwed version

NEW

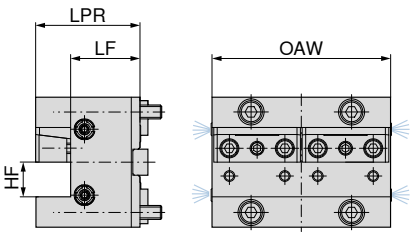





Adapter	Hole pattern	HF mm	LF mm	LPR mm	OAW mm	Left-hand 82 480 ... EUR Y7	
BMT 45	58 x 58	20	40	60	103	346,90	**01002**

Doosan/Spinner – BMT 45 – multi square section tool holder

▲ Directly screwed version

NEW

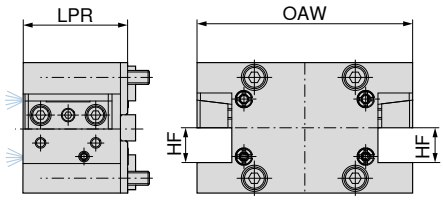





Adapter	Hole pattern	HF mm	LPR mm	OAW mm	82 480 ... EUR Y7	
BMT 45	58 x 58	20	60	124	458,90	**02003**

Doosan – BMT 45 – combi tool holder

▲ Directly screwed version

NEW

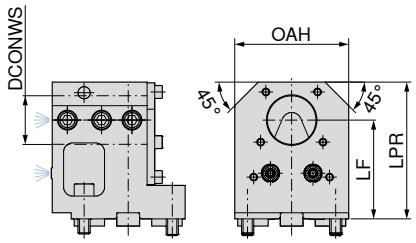






IC


Adapter	Hole pattern	DCONWS mm	LF mm	OAH mm	LPR mm	82 480 ... EUR Y7	
BMT 45	58 x 58	32	65	75	90	352,70	**03004**
BMT 45	58 x 58	32	85	75	110	596,90	**03005**

Doosan – BMT 55 – axial square section tool holder

▲ Directly screwed version

NEW

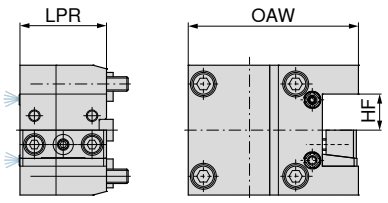





Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 481 ... EUR Y7	
BMT 55	64 x 64	25	60	118	358,10	**00001**

Doosan – BMT 55 – radial square section tool holder

▲ Directly screwed version

NEW

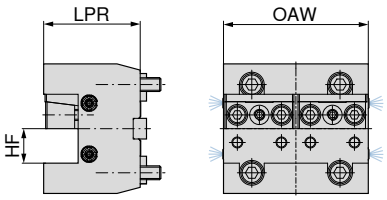




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 481 ... EUR Y7	
BMT 55	64 x 64	25	70	105	358,10	**01002**

Doosan – BMT 55 – multi square section tool holder

▲ Directly screwed version

NEW

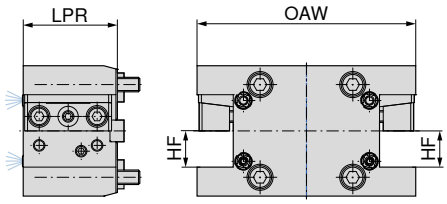




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	82 481 ... EUR Y7	
BMT 55	64 x 64	25	65	151	522,40	**02003**

Doosan – BMT 55 – boring bar holder

▲ Directly screwed version

NEW

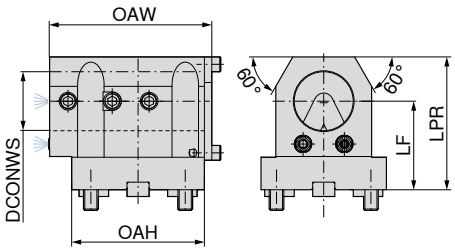






IC


Adapter	Hole pattern	DCONWS mm	LF mm	LPR mm	OAH mm	OAW mm	82 481 ... EUR Y7	
BMT55	64 x 64	40	60	90	90	110	352,70	**04004**

EMAG – BMT 55 – axial square section tool holder

▲ Directly screwed version

NEW

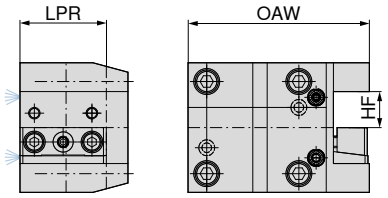





Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 482 ... EUR Y7
BMT 55	64 X 64	25	60	126	349,60 **00001**

EMAG – BMT 55 – radial square section tool holder

▲ Directly screwed version

NEW

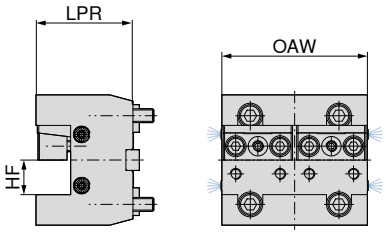




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 482 ... EUR Y7
BMT 55	64 x 64	25	70	105	358,10 **01002**

EMAG – BMT 55 – boring bar holder

▲ Directly screwed version

NEW

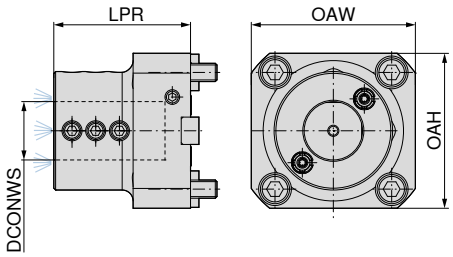






IC


Adapter	Hole pattern	DCONWS mm	LPR mm	OAW mm	OAH mm	82 482 ... EUR Y7
BMT55	64 x 64	32	75	85	90	427,40 **04003**

HAAS/Doosan – BMT 65 – axial square section tool holder

▲ Directly screwed version

NEW

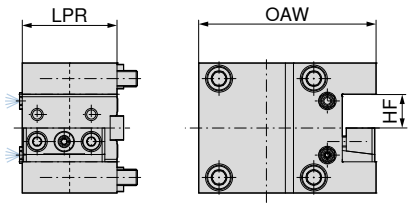




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 483 ... EUR Y7	
BMT 65	70 x 73	25	70	131	563,50	**00001**

HAAS/Doosan – BMT 65 – radial square section tool holder

▲ Directly screwed version

NEW

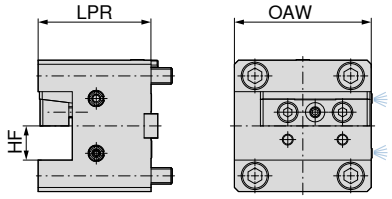




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Right-hand 82 483 ... EUR Y7	
BMT 65	70 x 73	25	82,5	100	425,40	**05002**

HAAS/Doosan – BMT 65 – multi square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW

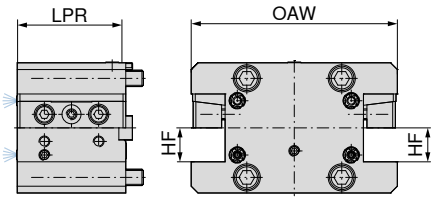





Adapter	Hole pattern	HF mm	LPR mm	OAW mm	82 483 ... EUR Y7	
BMT 65	70 x 73	25	80	152	548,50	**02003**

HAAS/Doosan – BMT 65 – combi tool holder

- Directly screwed version
- Double-sided version

NEW

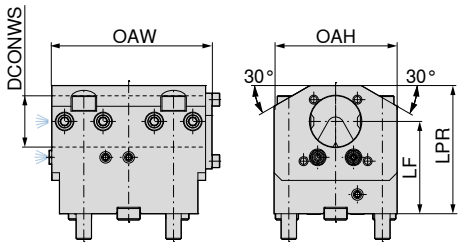






IC

Adapter	Hole pattern	DCONWS mm	LF mm	OAH mm	LPR mm	OAW mm	82 483 ... EUR Y7	
BMT 65	70 x 73	40	72	96	100	125	747,40	**03004**

Mori/Seiki – BMT 40 – axial square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW

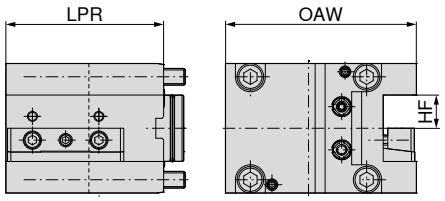





Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 484 ... EUR Y7	
BMT 40	70 x 62	20	95	115	330,10	**00001**

Mori/Seiki – BMT 40 – radial square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW

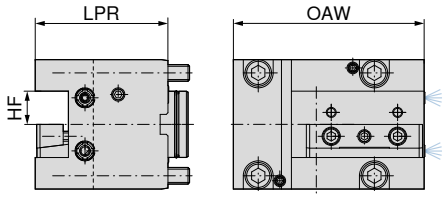




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 484 ... EUR Y7	
BMT 40	70 x 62	20	80	115	346,90	**01002**

Mori/Seiki – BMT 40 – multi square section tool holder

▲ Directly screwed version
▲ For right and left direction of rotation

NEW

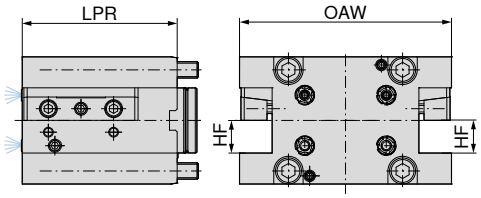




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	82 484 ... EUR Y7	
BMT 40	70 x 62	20	95	130	363,80	**02003**

Mori/Seiki – BMT 40 – combi tool holder

▲ Directly screwed version

NEW

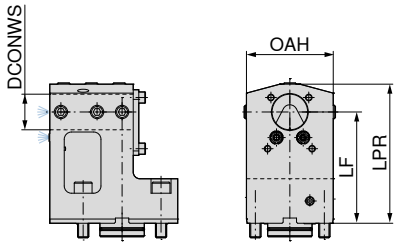





IC


Adapter	Hole pattern	DCONWS mm	OAH mm	LF mm	LPR mm	82 484 ... EUR Y7	
BMT 40	70 x 62	32	78	100	125	330,10	**03004**

Mori/Seiki – BMT 60 – axial square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW

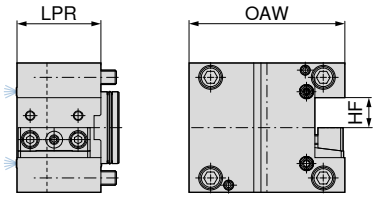





Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 485 ... EUR Y7	
BMT 60	94 x 84	25	70	130	330,10	**00001**

Mori/Seiki – BMT 60 – radial square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW

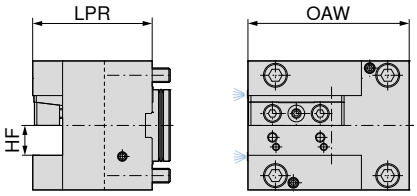




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 485 ... EUR Y7	
BMT 60	94 x 84	25	100	135	346,90	**01002**

Mori/Seiki – BMT 60 – multi square section tool holder

▲ Directly screwed version
▲ For right and left direction of rotation

NEW

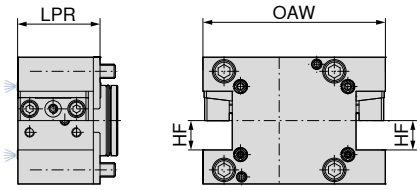




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	82 485 ... EUR Y7	
BMT 60	94 x 84	25	70	155,5	397,40	**02003**

Mori/Seiki – BMT 60 – combi tool holder

▲ Directly screwed version

NEW

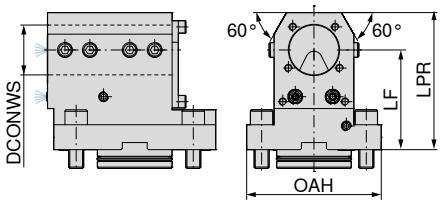





IC


Adapter	Hole pattern	DCONWS mm	LF mm	OAH mm	LPR mm	82 485 ... EUR Y7	
BMT 60	94 x 84	40	80	108	110	330,10	**03004**

Mazak – BMT 68 – axial square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW



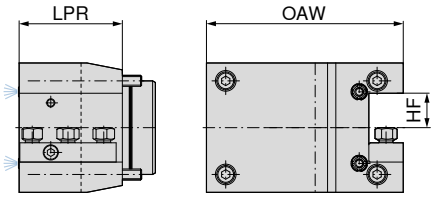



Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 486 ... EUR Y7	
BMT 68	110 x 68	25	75	143	316,10	**00001**

Mazak – BMT 68 – radial square section tool holder

- Directly screwed version
- For right and left direction of rotation

NEW



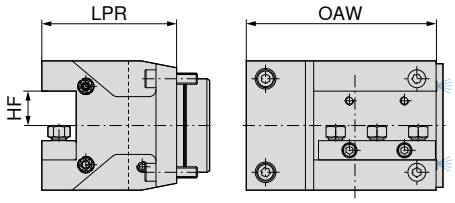


Adapter	Hole pattern	HF mm	LPR mm	OAW mm	Left-hand 82 486 ... EUR Y7	
BMT 68	110 x 68	25	98	143	321,30	**01002**

EMAG – BMT 68 – multi square section tool holder

▲ Directly screwed version

NEW

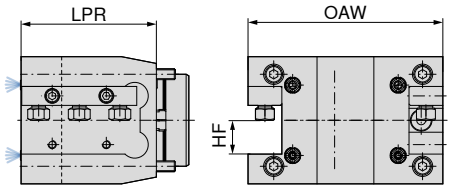




Adapter	Hole pattern	HF mm	LPR mm	OAW mm	82 486 ... EUR Y7	
BMT 68	110 x 68	25	100	144	505,90	**02003**

Mazak – BMT 68 – combi tool holder

▲ Directly screwed version

NEW

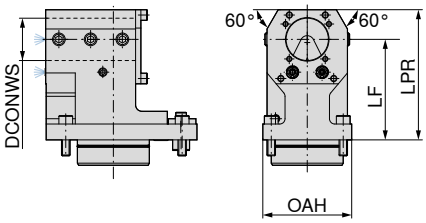





IC

Adapter	Hole pattern	DCONWS mm	OAH mm	LF mm	LPR mm	82 486 ... EUR Y7	
BMT 68	110 x 68	40	84	95	123	309,10	**03004**

PROJECTS IN THE BEST OF HANDS

Smart solutions for efficient machining processes

Benefit from our innovative tool concepts, many years of experience and professional advice to increase your productivity. You can rely on us to implement your project successfully!









Centric vice for small parts

ZSG mini in mechanical version with high clamping force and quick change jaws. Ideal for blank and finished part machining, multi-clamping and automation.

Your benefits:

- Fast jaw changeover without tools
- Compact and precise
- Optimum accessibility from all sides
- Exchangeable jaw widths (45 mm and 70 mm)
- High clamping force and large clamping range
- Clamping system for automation

Clamping/aligning:



Clamping with two M6 screws from above through the base body.




Clamping with two M6 screws from above through the base body. Alignment can be performed using Ø 12^{H7} precision holes.



Both versions come with mounting holes for the LANG zero point clamping system, Quick Point 52 x 52.

Clamping force:

ZSG mini tightening torque/clamping force

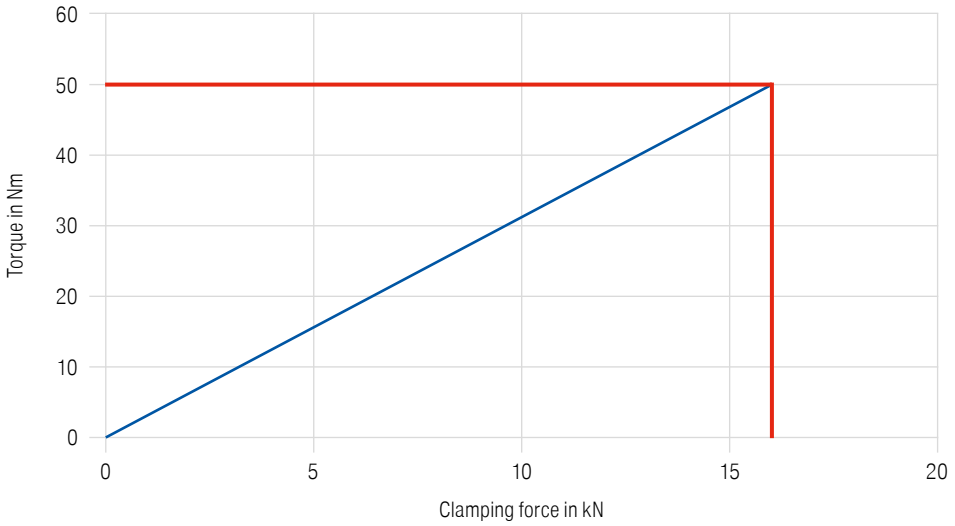


Centric vice for small parts

- Fast jaw changeover without tools
- Compact and precise
- Optimum accessibility from all sides
- Exchangeable jaw widths (45 mm and 70 mm)
- Stainless, hardened base body

Scope of supply:
ZSG mini base body with spindle without system jaws

ZSG mini



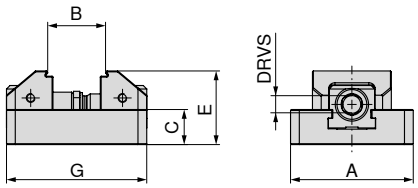




NEW

A mm	B mm	C mm	E mm	G mm	MXC kN	DRVS mm	WT kg	80 912 ... EUR Y4	
70	7 - 57	20	42	80	16	11	0,9	375,00	07000
70	7 - 77	20	42	100	16	11	1,1	425,00	07100

ZSG mini underside dimensions


Base width 70 mm



A mm	J_1 mm	J_{H7} mm	$I_{2\ \pm0,015}$ mm	$I_{\pm0,015}$ mm	G mm
70	6,5	12	50	52	80
70	6,5	12	50	52	100


ZSG Mini – structural dimension table for the different jaws

With quick change jaw, grip 3 mm

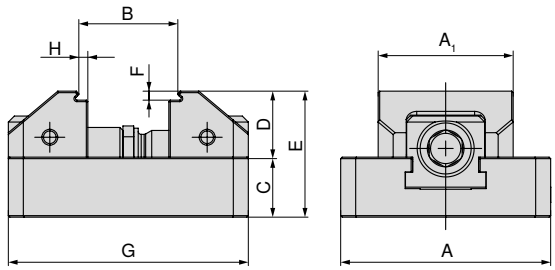

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	7 - 33	20	22	42	3	80	3	80 912 30100
70	70	7 - 33	20	22	42	3	80	3	80 912 30200
70	45	7 - 53	20	22	42	3	100	3	80 912 30100
70	70	7 - 53	20	22	42	3	100	3	80 912 30200


With quick change jaw, smooth step 5 mm

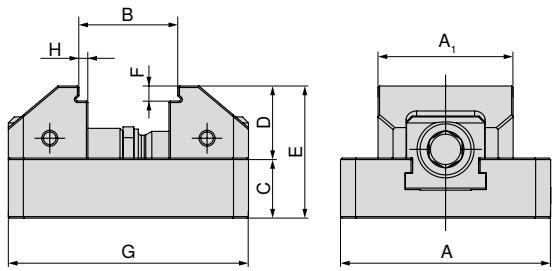

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	7 - 33	20	24	44	5	80	5	80 912 30300
70	70	7 - 33	20	24	44	5	80	5	80 912 30400
70	45	7 - 53	20	24	44	5	100	5	80 912 30300
70	70	7 - 53	20	24	44	5	100	5	80 912 30400


ZSG Mini - structural dimension table for the different jaws

with quick change jaw, VS, grip 3 mm

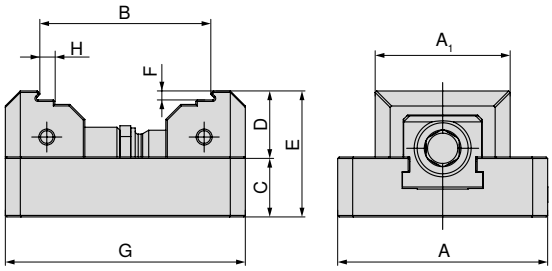

A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	31 - 57	20	22	42	3	80	5	80 912 30500
70	70	31 - 57	20	22	42	3	80	5	80 912 30600
70	45	31 - 77	20	22	42	3	100	5	80 912 30500
70	70	31 - 77	20	22	42	3	100	5	80 912 30600

Quick change jaw, VS, smooth 5 mm

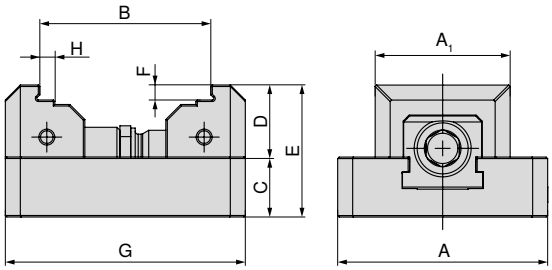


A mm	A_1 mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Article no. System jaws
70	45	31 - 56	20	24	44	5	80	5	80 912 30700
70	70	31 - 56	20	24	44	5	80	5	80 912 30800
70	45	31 - 76	20	24	44	5	100	5	80 912 30700
70	70	31 - 76	20	24	44	5	100	5	80 912 30800

System jaws overview

Quick change jaw, grip 3 mm


▲ Price per piece



Description	A	D	D_1	price	Article no.	Type association										
				EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	ESG mini	HDG 2	ZSG 4	ZSG mini	DSG 4	MSG 2
45	**22**	**19**		45,00	**80 912 30100**									●		
70	**22**	**19**		60,00	**80 912 30200**									●		

Quick change jaw, smooth step 5 mm


▲ Price per piece



Description	A	D	D_1	price	Article no.	Type association										
				EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	ESG mini	HDG 2	ZSG 4	ZSG mini	DSG 4	MSG 2
45	**24**	**19**		55,00	**80 912 30300**									●		
70	**24**	**19**		70,00	**80 912 30400**									●		

Quick change jaw, VS, grip 3 mm


▲ Price per piece



Description	A	D	D_1	price	Article no.	Type association										
				EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	ESG mini	HDG 2	ZSG 4	ZSG mini	DSG 4	MSG 2
45	**22**	**19**		45,00	**80 912 30500**									●		
70	**22**	**19**		60,00	**80 912 30600**									●		

Quick change jaw, VS, smooth 5 mm

▲ Price per piece



Description	A	D	D_1	price	Article no.	Type association										
				EUR	NEW Y4	NCG	H5G / -S / -Z	X5G-Z / -S	ESG 4	ESG 5	ESG mini	HDG 2	ZSG 4	ZSG mini	DSG 4	MSG 2
45	**24**	**19**		55,00	**80 912 30700**									●		
70	**24**	**19**		70,00	**80 912 30800**									●		

System accessories overview

Socket

▲ Suitable for 3/8" square drive



Square	DRVS mm	80 875 ... EUR Y4	
3/8"	11	14,70	**11100**

A suitable “magnetic workpiece stop” and “torque key” can be found in our new clamping technology catalogue
→ **Chapter 17 Workpiece clamping, pages 144 and 147 (article numbers 80 892 23800 and 80 884 402)**



Fast and efficient availability

The new portfolio: simple ways to new tools and service

With the most modern logistics center in Europe we ensure the shortest delivery times, with our Tool Supply 24/7 service for digitally simplified orders. The Tool-O-Mat, which can hold up to 840 different products, ensures that tools are ready when they are needed as a removal system on site. Payment is only made when withdrawn.

Logistics at the highest level

A logistic center that can meet all requirements, 99 % delivery capacity with next day delivery, no minimum order quantity, custom logistic solutions for major customers.

Fast ordering

- Online processes save time and money during the ordering process
- Add items to your basket quickly and easily
- High availability including a check in the basket
- Order 24 hours a day
- Quick delivery with tracking



Our current valid terms and conditions apply which can be found on our website. Images and prices are valid, subject to corrections due to technical improvements or further developments as well as general mistakes and typographical errors.


UNITED. EXPERIENCED. METAL CUTTING.



CUTTING SOLUTIONS BY CERATIZIT

SPECIALIST FOR INDEXABLE INSERT TOOLS FOR TURNING, MILLING AND GROOVING

The product brand CERATIZIT stands for high-quality indexable insert tools. The products are characterized by their high quality and contain the DNA of many years of experience in the development and production of carbide tools.

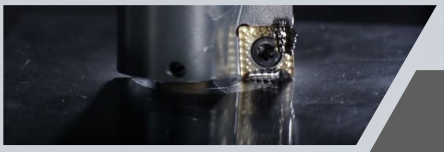

KOMET

THE QUALITY LABEL FOR EFFICIENT BORE PRODUCTION

High-precision drilling, reaming, countersinking and boring is a matter of expertise: efficient tooling solutions for drilling and mechatronic tools are therefore part of the KOMET brand name.



WNT

EXPERTS FOR ROTATING TOOLS, TOOL HOLDERS AND CLAMPING SOLUTIONS

WNT is synonymous with product diversity: solid carbide and HSS rotating tools, tool holders and efficient workholding solutions are all part of this brand.



KLENK

CUTTING TOOLS FOR THE AEROSPACE INDUSTRY

Solid carbide drills specially developed for the aerospace industry bear the product name KLENK. The highly specialised products are specifically designed for machining lightweight materials.

CERATIZIT GROUP

Climate neutral
Print product
ClimatePartner.com/16441-2105-1001

07/2021 – 99122 00248