

# UP<sup>2</sup>DATE

## Precision Thread Production

Thanks to the new performance upgrade, the MonoThread milling cutter now ensures maximum durability and value.

### ... ADDITIONAL PRODUCT HIGHLIGHTS

- ▲ Workpiece clamping for all small sizes: Zero point clamping system **MNG mini** takes performance to the max.
- ▲ Modular, flexible, extensive: Exchangeable head system **MaxiChange** now with grooving heads.

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

**Tooling a Sustainable Future**

[ceratizit.com](https://ceratizit.com)



**CERATIZIT**  
GROUP

# Welcome!



Placing your order is quick and easy

## Customer Service Centre

### Freephone Number

UK: 0800 073 2073

Ireland: 1800 93 22 55

### Freefax Number

UK: 0800 073 2074

### E-Mail

info.uk@ceratizit.com



It couldn't be easier

## Ordering via the Online Shop

<https://cuttingtools.ceratizit.com>



On-site technical support

## Your Local Technical Sales Engineer

Your customer number

# MonoThread – SFSE & SGF

The threading specialists with  
a real performance boost



**WNT**

## Improved thread milling cutter performance

In recent years, thread milling has become a viable alternative to tapping and thread forming or thread whirling. With the MonoThread – SGF as a shank thread milling cutter and the MonoThread – SFSE, the shank thread milling cutter with chamfer facet, CERATIZIT has launched two completely reworked tools from the Performance Line. Our tool developers placed particular focus on the performance aspect of both tools.




→ Page 12–19

You can find further information on the product here.

[cts.ceratizit.com/gb/en/monothread-sfg-sfse](https://cts.ceratizit.com/gb/en/monothread-sfg-sfse)



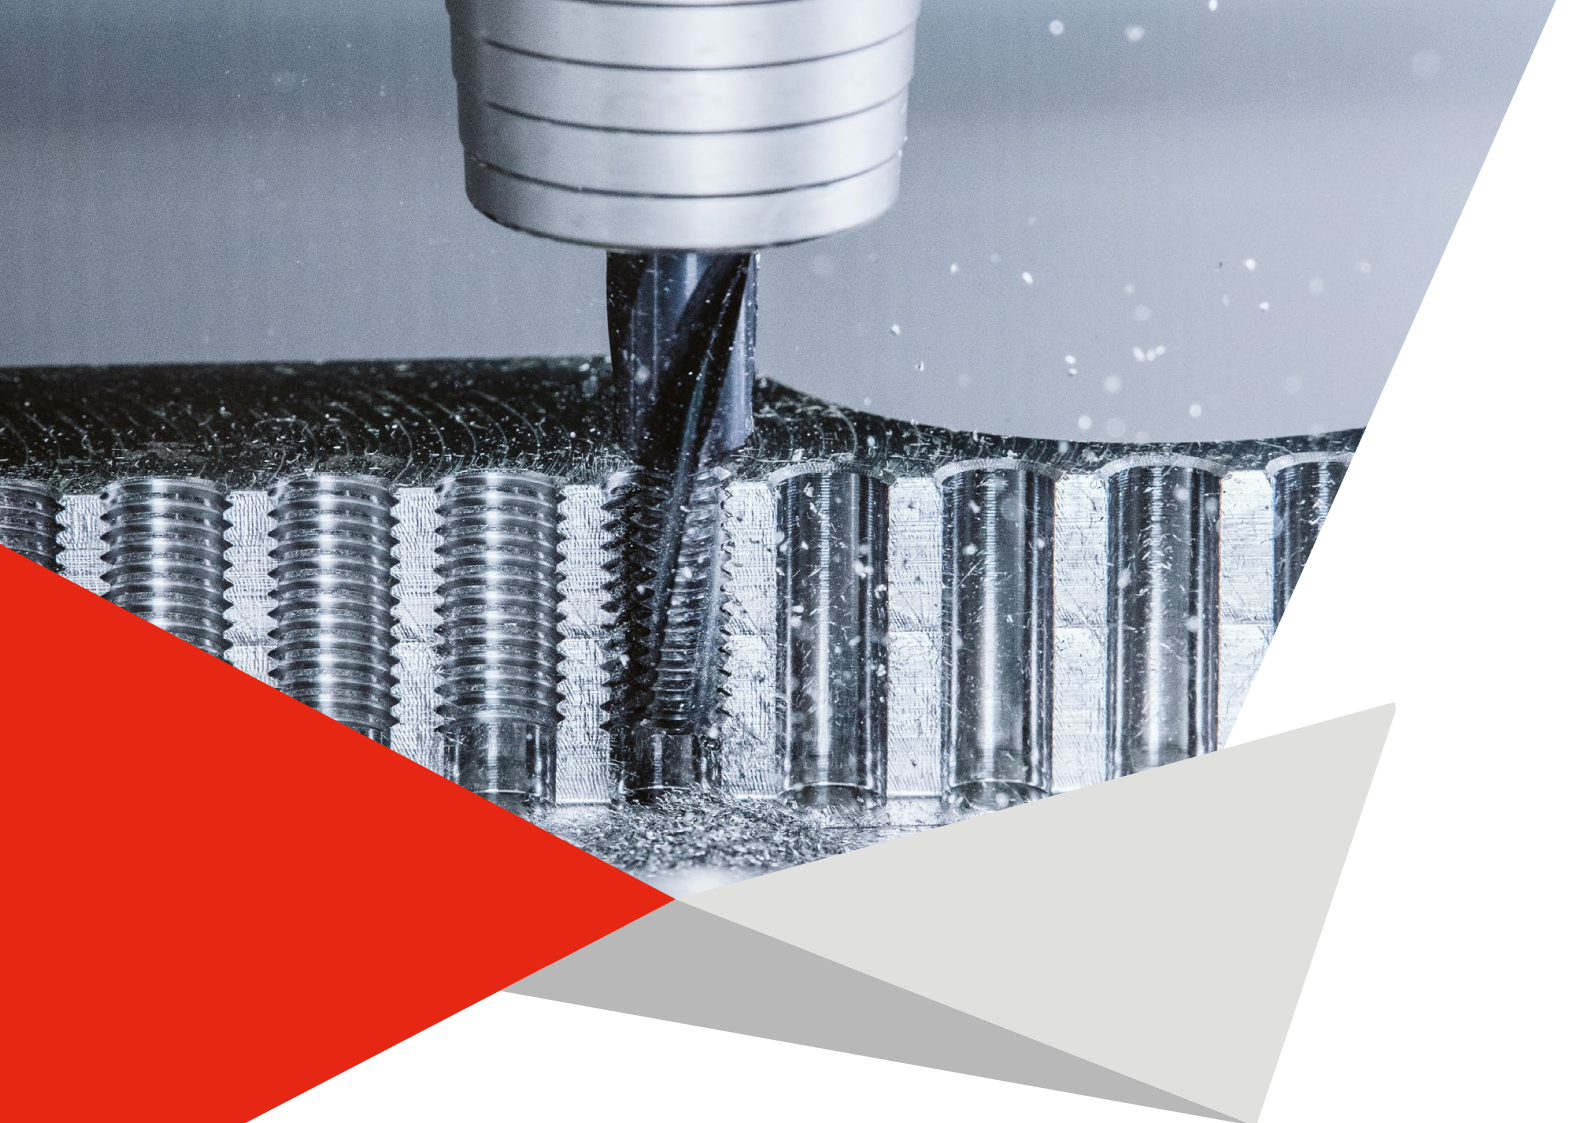

The new editions of CERATIZIT's Performance MonoThread – SGF & SFSE thread milling cutters are making strides towards their mission:

→ **Reliable increase in performance of up to 20% compared to the previous model!**

## The product upgrade guarantees enhanced performance:

|                                          |   |                                                |
|------------------------------------------|---|------------------------------------------------|
| ▲ Increased number of cutting edges      | → | Quicker machining time                         |
| ▲ Optimised core rounding and taper      | → | Improved service life and dimensional accuracy |
| ▲ Precision grinding                     | → | Significantly higher grinding quality          |
| ▲ Thro' coolant from a thread size of M4 | → | Improved tool life                             |
| ▲ Advanced coating                       | → | Higher wear resistance                         |
| ▲ Possible to regrind up to three times  | → | higher efficiency                              |



Find out more about our regrinding service here:

[cts.ceratizit.com/gb/en/regrinding](https://cts.ceratizit.com/gb/en/regrinding)

## Material-friendly thread production

The quality of a thread often determines whether the final product is a success or a reject. As it is often produced at the very end of the entire machining process, maximum precision and process security are key. Our new Performance shank thread milling cutters are undisputed champions in this area and boast an improved service life and unbeatable price-performance ratio.



### Thread milling cutter

#### **MonoThread – SGF**

- ▲ 28 different versions
- ▲ Thread types → M / MF / G
- ▲ Materials → Universal



### Thread milling cutter with chamfer facet

#### **MonoThread – SFSE**

- ▲ 38 different versions
- ▲ Thread types → M / MF / G / NPT / UNC / UNF
- ▲ Materials → Universal




The new thread milling cutters are also available in different lengths as semi-standard products!

The thread milling cutter upgrade is ideal for all standardised thread profiles with all tolerances and especially for asymmetrical, thin-walled, large or very expensive workpieces. The new shank thread milling cutters can be used to machine any materials, including high-strength and tempered steels.

## Test report: **MonoThread – SFSE**

|              |                                                             |
|--------------|-------------------------------------------------------------|
| Process      | Thread milling                                              |
| Product      | MonoThread – SFSE M8 2xD                                    |
| Thread depth | 16 mm                                                       |
| Material     | 42CrMo4                                                     |
| Cooling      | Int. coolant supply                                         |
| Technology   | $v_c = 100 \text{ m/min}$<br>$f_z = 0.040 \text{ mm/tooth}$ |

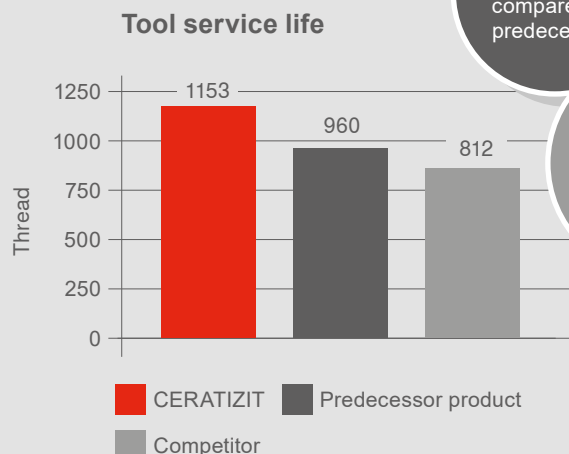

**+20%**

compared to predecessor

**+40%**

compared to competition



# One system, unlimited possibilities

Grooving heads added to the flexible  
MaxiChange exchangeable head system



**CERATIZIT**



[cts.ceratizit.com/gb/en/maxichange](https://cts.ceratizit.com/gb/en/maxichange)

## MaxiChange GX keeps a cool head during grooving

The MaxiChange exchangeable head system, with its countless base holders through to its vibration-damped boring bars, has become a flexible solution for a wide range of turning operations. Now we are expanding the product range to include the MaxiChange GX modular grooving system – which features an internal coolant supply to boot – to achieve a cool head, even under challenging conditions.




→ Page 32+33

You can find further information on the product here.

## Flexible solution for a variety of applications


As the MaxiChange exchangeable head system is modular, it is extremely flexible and can be used for a variety of applications thanks to the wide selection of exchangeable heads. On top of these advantages, the MaxiChange GX also includes a grooving function for internal and external machining as well as axial and radial machining.



Internal



External



axial



radial

## Advantage/benefit

**Modular** → All heads and base holders are compatible with each other

**Flexible** → Can be used for a variety of applications

**Extensive** → Wide range of exchangeable heads and base holders


“

We have engineered the system for maximum changeover precision and exceptional stability. At the same time, the modular design means it is extremely flexible and can be used for a variety of applications thanks to its wide selection of exchangeable heads.

Paul Höckberg, Product Manager Grooving Tools



”

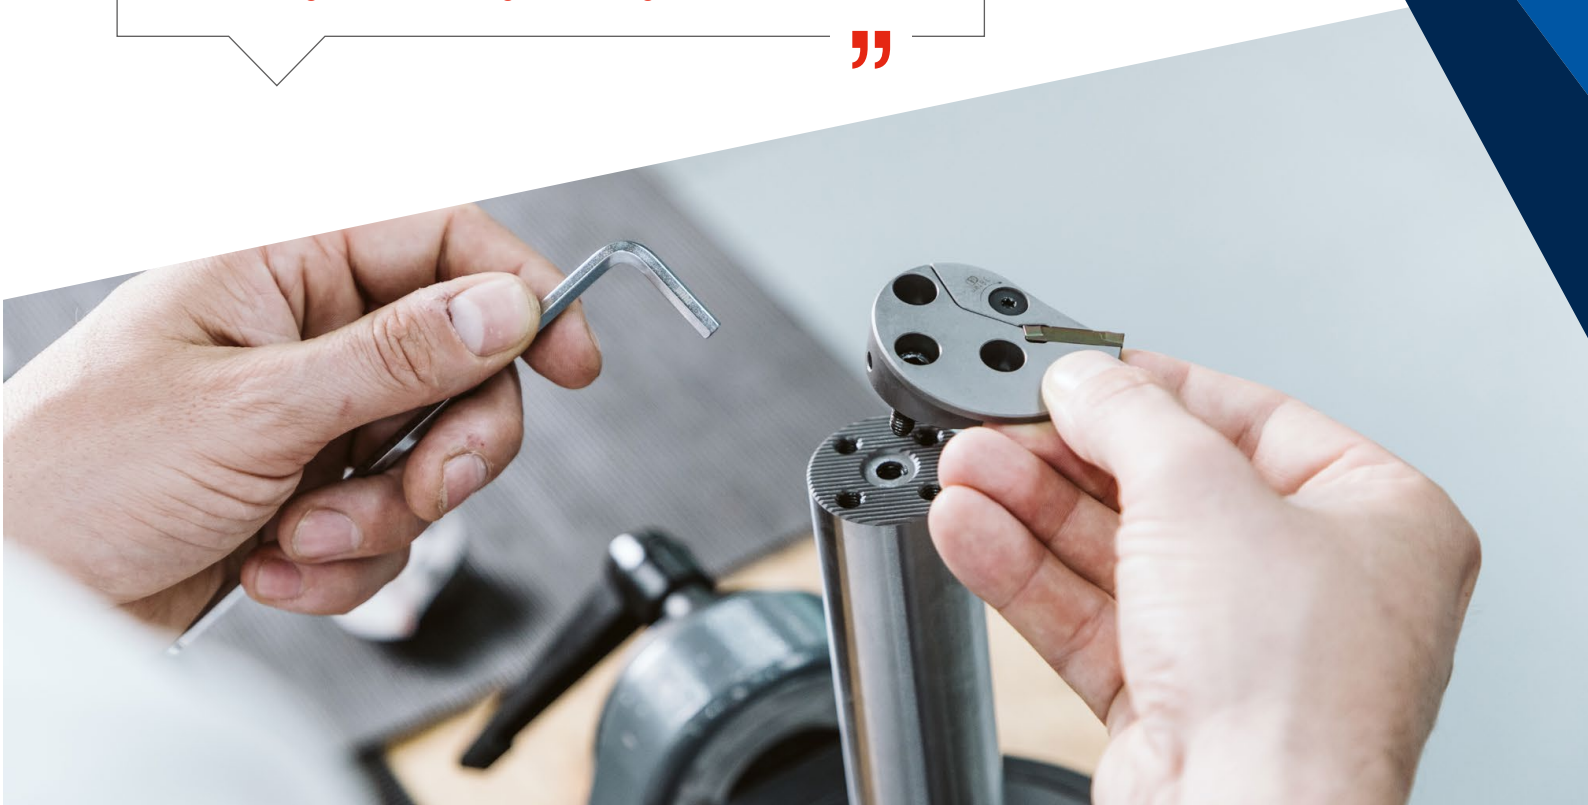



# Zero point clamping system – MNG mini

For workpiece clamping in the smaller dimension range



**WNT**

## **MNG mini – small zero point clamping system that delivers maxi performance**

Machine reference points are indispensable when it comes to highly precise machining. Zero point clamping systems, which are used both to clamp as well as to position the workpiece, are established solutions for this.

With the MNG mini, CERATIZIT is launching the little brother of the tried-and-tested MNG mechanical zero point clamping system – a stand-out product thanks to its weight-optimised consoles, pyramids and clamping towers with an integrated zero point clamping system for small clamping devices. These vices can be quickly and easily clamped manually using the four clamping bolts to increase machine runtimes while also reducing setup times.




→ Page 36–38


You can find further information on the product here.




## System overview



1-sided console



3-sided pyramid



4-sided pyramid



3-sided clamping tower

### 1 Suitable for the following clamping systems:

- ▲ ZSG 4 / 80 L-130
- ▲ ZSG mini 70 L-80
- ▲ ZSG mini 70 L-100
- ▲ ESG 5 80 L-130

### 4 Centre distance:

- ▲ 52 x 52 mm mounting bolt spacing
- ▲ Compatible with other manufacturers

### 2 Mechanical clamping:

- ▲ 1 clamping screw per MNG mini
- ▲ Tightening torque 30 Nm
- ▲ Insertion force 15 kN
- ▲ Width across flats 6 mm


### 5 Integrated zero point clamping system:

- ▲ Weight-saving
- ▲ More cost effective
- ▲ Fewer interference contours


### 3 Clamping options:

- ▲ Pallet and machine table
- ▲ Zero point clamping systems


## Advantage/benefit




Integrated zero point clamping system



Optimum accessibility with the machine spindle



Lightweight due to use of a high-strength, hard-anodised aluminium alloy



Quick, simple and accurate setup and retrofitting



Multi-clamping on 5-axis machines





# Exchangeable head system – MaxiChange

## Table of contents

### **WNT** Circular and Thread Milling

---

**12–19** MonoThread – SFSE & SGF

### **CERATIZIT** Turning Tools

---

**20–28** MaxiChange – Base holders for exchangeable head system

**29–31** MaxiChange – Turning heads for exchangeable head system

### **CERATIZIT** Grooving Tools

---

**32+33** MaxiChange – Grooving heads for exchangeable head system

### **WNT** Adapters and accessories

---

**34** ER collets

### **WNT** Workpiece clamping

---

**36–38** Zero point clamping system – MNG mini

**39** System jaws overview ESG 4 / ESG 5 / ZSG 4





## Zero point clamping system – MNG mini





## MonoThread – SFSE & SGF





# MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected

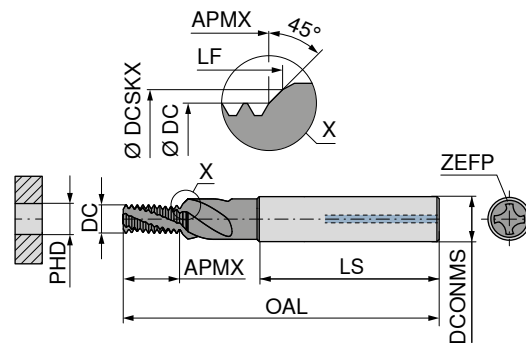

NEW

AlTiN



Solid carbide

50 552 ...

| DC<br>mm | Thread | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | DCSKX<br>mm | LF<br>mm | ZEFP | PHD<br>mm |  |
|----------|--------|----------|-----------|------------|----------|----------------------------|-------------|----------|------|-----------|--|
| 3.95     | M5     | 0.80     | 55        | 10.05      | 36       | 6                          | 5.3         | 10.60    | 3    | 4.2       |  |
| 4.68     | M6     | 1.00     | 62        | 12.56      | 36       | 8                          | 6.3         | 13.20    | 4    | 5.0       |  |
| 6.22     | M8     | 1.25     | 74        | 16.99      | 40       | 10                         | 8.3         | 17.76    | 4    | 6.8       |  |
| 7.79     | M10    | 1.50     | 79        | 20.41      | 45       | 12                         | 10.3        | 21.30    | 4    | 8.5       |  |
| 9.38     | M12    | 1.75     | 89        | 25.57      | 45       | 14                         | 12.3        | 26.60    | 5    | 10.2      |  |
| 12.83    | M16    | 2.00     | 102       | 33.27      | 48       | 18                         | 16.3        | 34.42    | 5    | 14.0      |  |

| £      |       |
|--------|-------|
| W1/5D  |       |
| 194.00 | 05000 |
| 194.00 | 06000 |
| 223.00 | 08000 |
| 248.00 | 10000 |
| 369.00 | 12000 |
| 391.00 | 16000 |



NEW

50 553 ...

| DC<br>mm | Thread   | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | DCSKX<br>mm | LF<br>mm | ZEFP | PHD<br>mm |  |
|----------|----------|----------|-----------|------------|----------|----------------------------|-------------|----------|------|-----------|--|
| 6.22     | M8x1     | 1.00     | 74        | 16.69      | 40       | 10                         | 8.3         | 17.34    | 4    | 7.0       |  |
| 7.79     | M10x1    | 1.00     | 79        | 20.81      | 45       | 12                         | 10.3        | 21.46    | 4    | 9.0       |  |
| 7.79     | M10x1,25 | 1.25     | 79        | 20.85      | 45       | 12                         | 12.3        | 21.63    | 4    | 8.8       |  |
| 9.38     | M12x1,25 | 1.25     | 89        | 24.72      | 45       | 14                         | 12.3        | 25.49    | 5    | 10.8      |  |
| 9.38     | M12x1,5  | 1.50     | 89        | 25.02      | 45       | 14                         | 12.3        | 25.92    | 5    | 10.5      |  |
| 10.92    | M14x1    | 1.00     | 102       | 29.06      | 48       | 16                         | 14.3        | 29.71    | 5    | 13.0      |  |
| 10.92    | M14x1,5  | 1.50     | 102       | 29.65      | 48       | 16                         | 14.3        | 30.55    | 5    | 12.5      |  |
| 12.82    | M16x1,5  | 1.50     | 102       | 32.67      | 48       | 18                         | 14.3        | 33.57    | 5    | 14.5      |  |

| £      |       |
|--------|-------|
| W1/5D  |       |
| 255.00 | 08200 |
| 301.00 | 10200 |
| 301.00 | 10300 |
| 375.00 | 12300 |
| 375.00 | 12400 |
| 399.00 | 14200 |
| 399.00 | 14400 |
| 401.00 | 16400 |



|   |   |
|---|---|
| P | • |
| M | • |
| K | • |
| N | • |
| S | • |
| H | • |
| O | • |

→ v<sub>c</sub>/f<sub>z</sub> Page 19

When calculating the feedrate for circular milling it is important to know whether contour feed  $v_f$  or feed on the center path  $v_{fm}$  is used.

# MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected

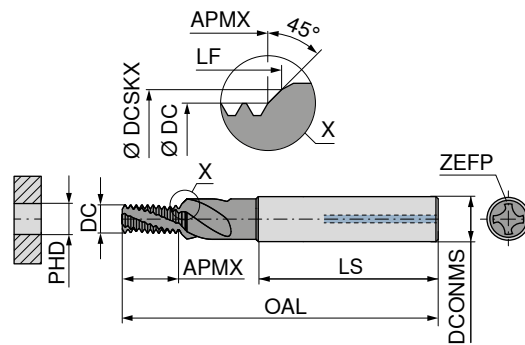

NEW

AlTiN



Solid carbide

50 551 ...

£  
W1/5D  
318.00 01800  
418.00 01400  
447.00 03800  
528.00 01200

| DC<br>mm | Thread   | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | DCSKX<br>mm | LF<br>mm | ZEFP<br>mm | PHD<br>mm |
|----------|----------|----------|-----------|------------|----------|----------------------------|-------------|----------|------------|-----------|
| 7.79     | G 1/8-28 | 0.907    | 79        | 20.59      | 45       | 12                         | 10.03       | 21.25    | 4          | 8.80      |
| 10.92    | G 1/4-19 | 1.337    | 102       | 27.53      | 48       | 16                         | 13.46       | 28.43    | 5          | 11.80     |
| 13.92    | G 3/8-19 | 1.337    | 102       | 34.34      | 48       | 18                         | 16.96       | 35.24    | 5          | 15.25     |
| 15.98    | G 1/2-14 | 1.814    | 127       | 43.27      | 56       | 25                         | 21.25       | 44.45    | 5          | 19.00     |

|   |   |
|---|---|
| P | • |
| M | • |
| K | • |
| N | • |
| S | • |
| H | • |
| O | • |



→ v<sub>c</sub>/f<sub>z</sub> Page 19

When calculating the feedrate for circular milling it is important to know whether contour feed  $v_f$  or feed on the center path  $v_{fm}$  is used.



# MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected

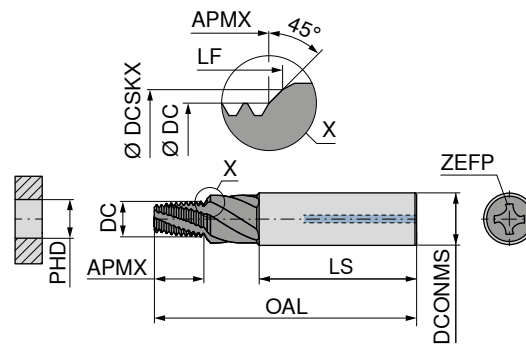

NEW

AlTiN



Solid carbide

50 554 ...

£  
W1/5D

| DC<br>mm | Thread      | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | DCSKX<br>mm | LF<br>mm | ZEFP | PHD<br>mm |
|----------|-------------|----------|-----------|------------|----------|----------------------------|-------------|----------|------|-----------|
| 5.45     | NPT 1/16-27 | 0.941    | 64        | 9.86       | 40       | 10                         | 8.70        | 11.33    | 4    | 6.15      |
| 7.87     | NPT 1/8-27  | 0.941    | 74        | 9.86       | 45       | 12                         | 11.10       | 11.33    | 4    | 8.50      |
| 10.10    | NPT 1/4-18  | 1.411    | 80        | 14.78      | 48       | 16                         | 14.50       | 16.76    | 5    | 11.10     |
| 16.42    | NPT 1/2-14  | 1.814    | 94        | 18.98      | 48       | 18                         |             |          | 5    | 17.90     |

257.00 11600

298.00 01800

351.00 01400

521.00 01200<sup>1)</sup>



|   |   |
|---|---|
| P | • |
| M | • |
| K | • |
| N | • |
| S | • |
| H | • |
| O | • |

1) Chamfer section at the front of the tool

→  $v_c/f_z$  Page 19When calculating the feedrate for circular milling it is important to know whether contour feed  $v_f$  or feed on the center path  $v_{fm}$  is used.

# MonoThread – Thread Milling Cutter with Chamfer Facet

▲ Profile corrected

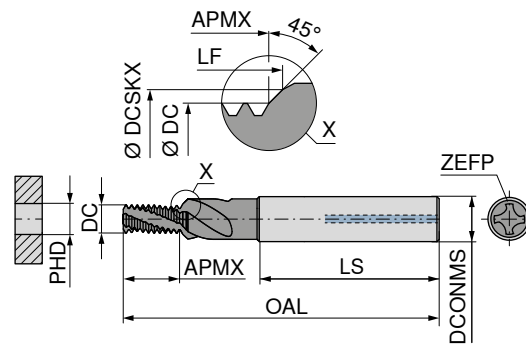

NEW

AlTiN



Solid carbide

50 555 ...

| DC<br>mm | Thread      | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | DCSKX<br>mm | LF<br>mm | ZEFP | PHD<br>mm |  |
|----------|-------------|----------|-----------|------------|----------|----------------------------|-------------|----------|------|-----------|--|
| 4.70     | UNC 1/4-20  | 1.270    | 62        | 14.68      | 36       | 8                          | 6.65        | 15.46    | 4    | 5.1       |  |
| 6.22     | UNC 5/16-18 | 1.411    | 74        | 16.28      | 40       | 10                         | 8.24        | 17.14    | 4    | 6.6       |  |
| 7.34     | UNC 3/8-16  | 1.588    | 79        | 19.98      | 45       | 12                         | 9.83        | 20.92    | 4    | 8.0       |  |
| 8.57     | UNC 7/16-14 | 1.814    | 79        | 22.83      | 45       | 12                         | 11.41       | 23.89    | 4    | 9.4       |  |
| 9.38     | UNC 1/2-13  | 1.954    | 89        | 26.71      | 45       | 14                         | 13.00       | 27.83    | 5    | 10.8      |  |
| 10.92    | UNC 9/16-12 | 2.117    | 102       | 30.99      | 48       | 16                         | 14.60       | 32.20    | 5    | 12.2      |  |
| 12.50    | UNC 5/8-11  | 2.309    | 102       | 33.72      | 48       | 18                         | 16.18       | 35.03    | 5    | 13.5      |  |
| 15.21    | UNC 3/4-10  | 2.540    | 110       | 39.68      | 50       | 20                         | 19.35       | 41.10    | 5    | 16.5      |  |

£  
W1/5D

262.00 01400  
291.00 51600  
329.00 03800  
378.00 71600  
384.00 01200  
492.00 91600  
538.00 05800  
542.00 03400



NEW

50 556 ...

| DC<br>mm | Thread      | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | DCSKX<br>mm | LF<br>mm | ZEFP | PHD<br>mm |  |
|----------|-------------|----------|-----------|------------|----------|----------------------------|-------------|----------|------|-----------|--|
| 4.70     | UNF 1/4-28  | 0.907    | 62        | 14.24      | 36       | 8                          | 6.65        | 14.84    | 4    | 5.5       |  |
| 6.22     | UNF 5/16-24 | 1.058    | 74        | 16.56      | 40       | 10                         | 8.24        | 17.23    | 4    | 6.9       |  |
| 7.79     | UNF 3/8-24  | 1.058    | 79        | 19.73      | 45       | 12                         | 9.83        | 20.41    | 4    | 8.5       |  |
| 9.32     | UNF 7/16-20 | 1.270    | 89        | 22.34      | 45       | 14                         | 11.40       | 23.13    | 5    | 9.9       |  |
| 9.38     | UNF 1/2-20  | 1.270    | 89        | 26.57      | 45       | 14                         | 13.00       | 27.36    | 5    | 11.5      |  |
| 10.92    | UNF 9/16-18 | 1.411    | 102       | 29.43      | 48       | 16                         | 14.59       | 30.29    | 5    | 12.9      |  |
| 12.82    | UNF 5/8-18  | 1.411    | 102       | 33.58      | 48       | 18                         | 16.18       | 34.43    | 5    | 14.5      |  |
| 15.82    | UNF 3/4-16  | 1.587    | 110       | 39.29      | 50       | 20                         | 19.35       | 40.23    | 5    | 17.5      |  |

£  
W1/5D

262.00 01400  
291.00 51600  
335.00 03800  
361.00 71600  
370.00 01200  
471.00 91600  
387.00 05800  
534.00 03400

|   |   |
|---|---|
| P | • |
| M | • |
| K | • |
| N | • |
| S | • |
| H | • |
| O | • |



→  $v_c/f_z$  Page 19

When calculating the feedrate for circular milling it is important to know whether contour feed  $v_f$  or feed on the center path  $v_{fm}$  is used.



# MonoThread – Thread Milling Cutter

▲ Profile corrected

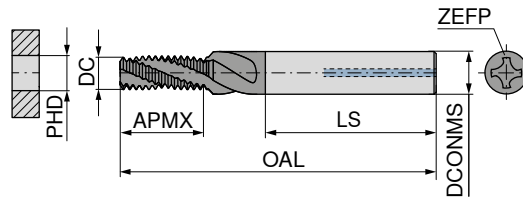

NEW

AlTiN



Solid carbide

50 531 ...

| DC<br>mm | Thread | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | ZEFP | PHD<br>mm |
|----------|--------|----------|-----------|------------|----------|----------------------------|------|-----------|
| 2.44     | M3     | 0.50     | 42        | 6.24       | 36       | 4                          | 3    | 2.5       |
| 3.14     | M4     | 0.70     | 49        | 8.00       | 36       | 6                          | 3    | 3.3       |
| 3.95     | M5     | 0.80     | 55        | 10.00      | 36       | 6                          | 3    | 4.2       |
| 4.68     | M6     | 1.00     | 55        | 12.47      | 36       | 6                          | 4    | 5.0       |
| 6.22     | M8     | 1.25     | 62        | 16.83      | 36       | 8                          | 4    | 6.8       |
| 7.79     | M10    | 1.50     | 74        | 20.20      | 40       | 10                         | 4    | 8.5       |
| 9.38     | M12    | 1.75     | 79        | 25.32      | 45       | 12                         | 5    | 10.2      |
| 10.92    | M14    | 2.00     | 89        | 28.93      | 45       | 14                         | 5    | 12.0      |
| 12.83    | M16    | 2.00     | 102       | 32.94      | 48       | 16                         | 5    | 14.0      |
| 13.93    | M18    | 2.50     | 102       | 36.17      | 48       | 16                         | 5    | 15.5      |
| 15.83    | M20    | 2.50     | 110       | 41.17      | 50       | 20                         | 5    | 17.5      |

| £      |                     |
|--------|---------------------|
| W1/5D  |                     |
| 162.00 | 03000 <sup>1)</sup> |
| 180.00 | 04000               |
| 180.00 | 05000               |
| 186.00 | 06000               |
| 196.00 | 08000               |
| 224.00 | 10000               |
| 257.00 | 12000               |
| 315.00 | 14000               |
| 324.00 | 16000               |
| 386.00 | 18000               |
| 395.00 | 20000               |

1) Without Through Coolant



NEW

50 532 ...

| DC<br>mm | Thread  | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | ZEFP | PHD<br>mm |
|----------|---------|----------|-----------|------------|----------|----------------------------|------|-----------|
| 3.14     | M4x0,5  | 0.50     | 49        | 8.00       | 36       | 6                          | 3    | 3.5       |
| 3.95     | M5x0,5  | 0.50     | 55        | 10.00      | 36       | 6                          | 3    | 4.5       |
| 4.68     | M6x0,75 | 0.75     | 55        | 12.34      | 36       | 6                          | 4    | 5.2       |
| 6.22     | M8x0,75 | 0.75     | 62        | 16.09      | 36       | 8                          | 4    | 7.2       |
| 6.22     | M8x1    | 1.00     | 62        | 16.46      | 36       | 8                          | 4    | 7.0       |
| 7.79     | M10x1   | 1.00     | 74        | 20.46      | 40       | 10                         | 4    | 9.0       |
| 9.38     | M12x1   | 1.00     | 79        | 24.45      | 45       | 12                         | 5    | 11.0      |
| 9.38     | M12x1,5 | 1.50     | 79        | 24.69      | 45       | 12                         | 5    | 10.5      |
| 10.92    | M14x1,5 | 1.50     | 89        | 29.19      | 45       | 14                         | 5    | 12.5      |
| 12.82    | M16x1,5 | 1.50     | 102       | 32.19      | 48       | 16                         | 5    | 14.5      |
| 13.93    | M18x1,5 | 1.50     | 102       | 36.68      | 48       | 16                         | 5    | 16.5      |
| 15.83    | M20x1,5 | 1.50     | 110       | 41.18      | 50       | 20                         | 5    | 18.5      |



| £      |       |
|--------|-------|
| W1/5D  |       |
| 177.00 | 04000 |
| 177.00 | 05000 |
| 183.00 | 06100 |
| 196.00 | 08100 |
| 199.00 | 08200 |
| 213.00 | 10200 |
| 257.00 | 12200 |
| 269.00 | 12400 |
| 315.00 | 14400 |
| 324.00 | 16400 |
| 386.00 | 18400 |
| 395.00 | 20400 |

|   |   |
|---|---|
| P | • |
| M | • |
| K | • |
| N | • |
| S | • |
| H | • |
| O | • |

→ v<sub>c</sub>/f<sub>z</sub> Page 19When calculating the feedrate for circular milling it is important to know whether contour feed v<sub>t</sub> or feed on the center path v<sub>fm</sub> is used.

# MonoThread – Thread Milling Cutter

▲ Profile corrected

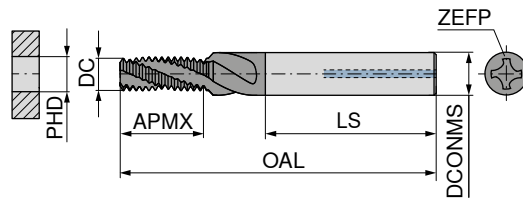

NEW

AlTiN



Solid carbide

50 530 ...

£  
W1/5D  
250.00 01800  
279.00 01400  
390.00 03800  
464.00 10000  
416.00 01200

| DC<br>mm | Thread   | TP<br>mm | OAL<br>mm | APMX<br>mm | LS<br>mm | DCONMS <sub>h6</sub><br>mm | ZEFP | PHD<br>mm |
|----------|----------|----------|-----------|------------|----------|----------------------------|------|-----------|
| 7.79     | G 1/8-28 | 0.907    | 74        | 20.35      | 40       | 10                         | 4    | 8.80      |
| 10.92    | G 1/4-19 | 1.337    | 89        | 27.34      | 45       | 14                         | 5    | 11.80     |
| 13.92    | G 3/8-19 | 1.337    | 102       | 35.36      | 48       | 16                         | 5    | 15.25     |
| 15.90    | G 1-11   | 2.309    | 102       | 33.29      | 48       | 16                         | 5    | 30.75     |
| 15.98    | G 1/2-14 | 1.814    | 110       | 42.51      | 50       | 20                         | 5    | 19.00     |

|   |   |
|---|---|
| P | ● |
| M | ● |
| K | ● |
| N | ● |
| S | ● |
| H | ● |
| O | ● |

→  $v_c/f_z$  Page 19

When calculating the feedrate for circular milling it is important to know whether contour feed  $v_f$  or feed on the center path  $v_{fm}$  is used.





## Cutting data standard values

| Index | 50 551 ..., 50 552 ..., 50 553 ..., 50 554 ..., 50 555 ..., 50 556 ... /<br>50 530 ..., 50 531 ..., 50 532 ... |     |                        |               |
|-------|----------------------------------------------------------------------------------------------------------------|-----|------------------------|---------------|
|       | SFSE                                                                                                           | SGF | AlTiN<br>Solid carbide |               |
|       |                                                                                                                |     | Ø 2,4 – 5,9            | Ø 6,0 – 11,9  |
|       | $v_c$ (m/min)                                                                                                  |     | $f_z$ (mm/tooth)       |               |
|       |                                                                                                                |     |                        | Ø 12,0 – 20,0 |
| P.1.1 | 80–150                                                                                                         |     | 0,015–0,04             | 0,04–0,08     |
| P.1.2 | 80–120                                                                                                         |     | 0,015–0,04             | 0,04–0,08     |
| P.1.3 | 80–120                                                                                                         |     | 0,015–0,04             | 0,04–0,08     |
| P.1.4 | 80–120                                                                                                         |     | 0,015–0,04             | 0,04–0,08     |
| P.1.5 | 60–100                                                                                                         |     | 0,01–0,04              | 0,04–0,06     |
| P.2.1 | 80–120                                                                                                         |     | 0,015–0,04             | 0,04–0,08     |
| P.2.2 | 80–100                                                                                                         |     | 0,015–0,04             | 0,04–0,08     |
| P.2.3 | 80–100                                                                                                         |     | 0,010–0,04             | 0,04–0,08     |
| P.2.4 | 80–100                                                                                                         |     | 0,010–0,04             | 0,04–0,08     |
| P.3.1 | 70–90                                                                                                          |     | 0,01–0,03              | 0,03–0,05     |
| P.3.2 | 60–80                                                                                                          |     | 0,006–0,02             | 0,02–0,04     |
| P.3.3 | 50–70                                                                                                          |     | 0,006–0,02             | 0,02–0,04     |
| P.4.1 | 70–90                                                                                                          |     | 0,006–0,02             | 0,02–0,04     |
| P.4.2 | 60–80                                                                                                          |     | 0,006–0,02             | 0,02–0,04     |
| M.1.1 | 60–100                                                                                                         |     | 0,01–0,04              | 0,04–0,08     |
| M.2.1 | 60–100                                                                                                         |     | 0,01–0,03              | 0,03–0,06     |
| M.3.1 | 60–100                                                                                                         |     | 0,01–0,03              | 0,03–0,06     |
| K.1.1 | 80–120                                                                                                         |     | 0,02–0,06              | 0,06–0,12     |
| K.1.2 | 80–120                                                                                                         |     | 0,02–0,05              | 0,05–0,10     |
| K.2.1 | 80–100                                                                                                         |     | 0,02–0,05              | 0,05–0,10     |
| K.2.2 | 80–100                                                                                                         |     | 0,02–0,05              | 0,05–0,10     |
| K.3.1 | 80–100                                                                                                         |     | 0,015–0,05             | 0,05–0,08     |
| K.3.2 | 80–100                                                                                                         |     | 0,015–0,03             | 0,03–0,08     |
| N.1.1 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.1.2 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.2.1 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.2.2 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.2.3 | 100–250                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.3.1 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.3.2 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.3.3 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| N.4.1 | 100–400                                                                                                        |     | 0,04–0,09              | 0,08–0,15     |
| S.1.1 | 40–100                                                                                                         |     | 0,01–0,04              | 0,04–0,07     |
| S.1.2 |                                                                                                                |     |                        |               |
| S.2.1 |                                                                                                                |     |                        |               |
| S.2.2 |                                                                                                                |     |                        |               |
| S.2.3 |                                                                                                                |     |                        |               |
| S.3.1 | 40–100                                                                                                         |     | 0,01–0,04              | 0,04–0,07     |
| S.3.2 |                                                                                                                |     |                        |               |
| S.3.3 |                                                                                                                |     |                        |               |
| H.1.1 |                                                                                                                |     |                        |               |
| H.1.2 |                                                                                                                |     |                        |               |
| H.1.3 |                                                                                                                |     |                        |               |
| H.1.4 |                                                                                                                |     |                        |               |
| H.2.1 |                                                                                                                |     |                        |               |
| H.3.1 |                                                                                                                |     |                        |               |
| O.1.1 | 100–400                                                                                                        |     | 0,03–0,08              | 0,08–0,15     |
| O.1.2 | 100–400                                                                                                        |     | 0,03–0,08              | 0,08–0,15     |
| O.2.1 | 50–80                                                                                                          |     | 0,03–0,08              | 0,08–0,15     |
| O.2.2 | 50–80                                                                                                          |     | 0,03–0,08              | 0,08–0,15     |
| O.3.1 |                                                                                                                |     |                        |               |



The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx.  $\pm 20\%$  according to the usage conditions.

## MaxiChange – Overview of the product range

As the MaxiChange exchangeable head system is modular, it is extremely flexible and can be used for a variety of applications thanks to the wide selection of exchangeable heads. On top of these advantages, the MaxiChange GX also includes a grooving function for internal and external machining as well as axial and radial machining.

### Exchangeable heads


#### Turning Tools

##### For negative inserts

PCLN 95°



PDUN 93°



PDQN 107,5°




PWLN 95°




##### For positive inserts

SCLC 95°



SDUC 93°



SDQC 107,5°

**NEW**

SVPC 117,5°

**NEW**


SVUC 93°

**NEW**

SVQC 107,5°



##### For internal thread




#### Grooving Tools

##### For radial grooving

**NEW**


GX 16



##### For axial grooving

**NEW**

GX 24



### Tool holder

PSC

**NEW**

Vibration damped

Actively  
vibration-damped**NEW**

HSK-T

**NEW**

Vibration damped

Actively  
vibration-damped**NEW**


Cylindrical shank

**NEW**Actively  
vibration-damped**NEW**Square shank holder  
0°**NEW**Square shank holder  
90°**NEW**

# MaxiChange – Base holders for the exchangeable head system

## Scope of supply:

Includes clamping screws

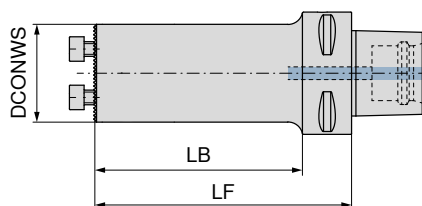

NEW

84 192 ...

| Adapter | LF<br>mm | LB<br>mm | DCONWS<br>mm | £<br>Y8 |       |
|---------|----------|----------|--------------|---------|-------|
| PSC 40  | 40       | 20       | 16           | 577.00  | 01695 |
| PSC 40  | 50       | 30       | 20           | 596.00  | 02095 |
| PSC 50  | 40       | 20       | 16           | 650.00  | 01694 |
| PSC 50  | 50       | 30       | 20           | 650.00  | 02094 |
| PSC 63  | 40       | 18       | 16           | 708.00  | 01693 |
| PSC 63  | 50       | 28       | 20           | 708.00  | 02093 |



Clamping Screw

84 950 ...

## Spare parts

| DCONWS | £<br>Y8 |               |
|--------|---------|---------------|
| 16     | 8.00    | M3x10 44800   |
| 20     | 17.00   | M3,5x12 44900 |




## MaxiChange – Base holders for the exchangeable head system – actively vibration-damped

- ▲ Reduction of vibrations through actively mounted dampers
- ▲ Improvement in surface finish and chip evacuation

### Scope of supply:

Includes clamping screws

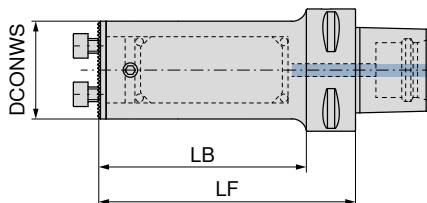

| Adapter | LF<br>mm | LB<br>mm | DCONWS<br>mm |  |  |
|---------|----------|----------|--------------|--|--|
| PSC 40  | 88       | 68       | 16           |  |  |
| PSC 40  | 107      | 87       | 20           |  |  |
| PSC 50  | 85       | 65       | 16           |  |  |
| PSC 50  | 109      | 89       | 20           |  |  |
| PSC 63  | 90       | 68       | 16           |  |  |
| PSC 63  | 110      | 88       | 20           |  |  |

1) Not ex-stock

NEW

84 198 ...

£  
Y8

2,751.00 31695<sup>1)</sup>

2,013.00 32095<sup>1)</sup>

2,205.00 31694<sup>1)</sup>

2,165.00 32094<sup>1)</sup>

2,821.00 31693<sup>1)</sup>

2,779.00 32093<sup>1)</sup>



Clamping Screw

### Spare parts


| DCONWS |         |       |       |
|--------|---------|-------|-------|
| 16     | M3x10   | 8.00  | 44800 |
| 20     | M3,5x12 | 17.00 | 44900 |

84 950 ...

£  
Y8

# MaxiChange – Base holders for the exchangeable head system

Scope of supply:  
Includes clamping screws

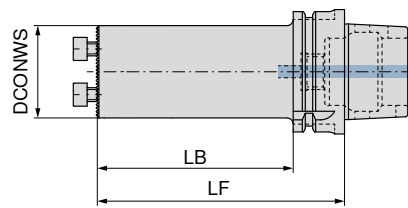

| Adapter  | LF<br>mm | LB<br>mm | DCONWS<br>mm |
|----------|----------|----------|--------------|
| HSK-T 63 | 56       | 30       | 16           |
| HSK-T 63 | 80       | 54       | 20           |


NEW

84 193 ...

£  
Y8

852.00 01637

959.00 02037



Clamping Screw

Spare parts  
DCONWS


|    |         | £<br>Y8     |
|----|---------|-------------|
| 16 | M3x10   | 8.00 44800  |
| 20 | M3,5x12 | 17.00 44900 |

84 950 ...

# MaxiChange – Base holders for the exchangeable head system – actively vibration-damped

- ▲ Reduction of vibrations through actively mounted dampers
- ▲ Improvement in surface finish and chip evacuation

Scope of supply:  
Includes clamping screws

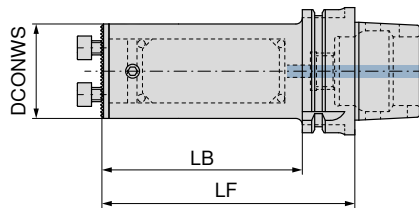

| Adapter  | LF<br>mm | LB<br>mm | DCONWS<br>mm |
|----------|----------|----------|--------------|
| HSK-T 63 | 90       | 64       | 16           |
| HSK-T 63 | 106      | 80       | 20           |

|            |                     |
|------------|---------------------|
| NEW        |                     |
| 84 198 ... |                     |
| £          |                     |
| Y8         |                     |
| 2,821.00   | 31637 <sup>1)</sup> |
| 2,779.00   | 32037 <sup>1)</sup> |

1) Not ex-stock



Clamping Screw

Spare parts  
DCONWS

|    |         |       |       |
|----|---------|-------|-------|
| 16 | M3x10   | £     |       |
| 20 | M3,5X12 | Y8    |       |
|    |         | 8.00  | 44800 |
|    |         | 17.00 | 44900 |



|            |       |
|------------|-------|
| 84 950 ... |       |
| £          |       |
| Y8         |       |
| 8.00       | 44800 |
| 17.00      | 44900 |

# MaxiChange – Base holders for the exchangeable head system – cylindrical

- ▲ Connection thread for thro' coolant
- ▲ 3 clamping flats

## Scope of supply:

Includes clamping screws

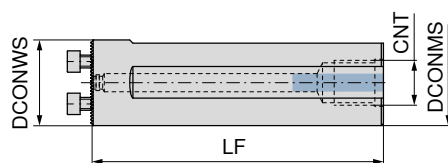

| DCONWS<br>mm | LF<br>mm | DCONMS<br>mm | CNT    |
|--------------|----------|--------------|--------|
| 25           | 100      | 25           | M8 x 1 |
| 32           | 120      | 32           | M8 x 1 |
| 40           | 120      | 40           | M8 x 1 |

NEW

84 194 ...

£  
Y8

437.00 12599

437.00 13299

437.00 14099



Clamping Screw

84 950 ...

£  
Y8

## Spare parts

| DCONWS |             |            |
|--------|-------------|------------|
| 25     | M4X12 (SW3) | 4.59 30000 |
| 32     | M5X14 (SW4) | 4.59 29900 |
| 40     | M6X16 (SW5) | 4.59 29800 |





## MaxiChange – Base holders for the exchangeable head system – actively vibration-damped

▲ Connection thread for thro' coolant

▲ 3 clamping flats

### Scope of supply:

Includes clamping screws

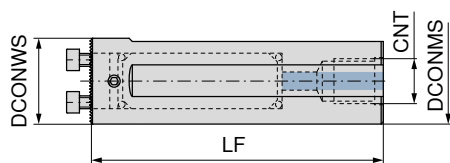

NEW

84 198 ...

£  
Y8

| DCONWS<br>mm | LF<br>mm | DCONMS<br>mm | CNT |
|--------------|----------|--------------|-----|
| 16           | 150      | 16           | 1/4 |
| 20           | 180      | 20           | 1/4 |
| 25           | 220      | 25           | 1/4 |
| 32           | 285      | 32           | 1/2 |
| 40           | 368      | 40           | 1/2 |

|          |       |
|----------|-------|
| 1,826.00 | 31699 |
| 2,137.00 | 32099 |
| 2,237.00 | 32599 |
| 2,285.00 | 33299 |
| 3,228.00 | 34099 |



Clamping Screw

84 950 ...

£  
Y8



### DCONWS

|    |             |       |       |
|----|-------------|-------|-------|
| 16 | M3x10       | 8.00  | 44800 |
| 20 | M3,5x12     | 17.00 | 44900 |
| 25 | M4x12 (SW3) | 4.59  | 30000 |
| 32 | M5x14 (SW4) | 4.59  | 29900 |
| 40 | M6x16 (SW5) | 4.59  | 29800 |

# MaxiChange – 0° base holders for the exchangeable head system

## Scope of supply:

Includes clamping screws

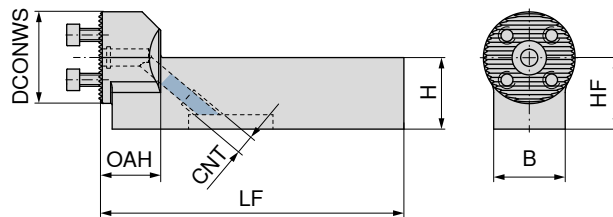

| DCONWS<br>mm | H<br>mm | B<br>mm | HF<br>mm | OAH<br>mm | LF<br>mm | CNT  |
|--------------|---------|---------|----------|-----------|----------|------|
| 25           | 20      | 20      | 20       | 21        | 106      | M8x1 |
| 32           | 20      | 20      | 20       | 21        | 106      | M8x1 |
| 32           | 25      | 25      | 25       | 21        | 106      | M8x1 |
| 40           | 25      | 25      | 25       | 21        | 106      | M8x1 |

NEW

84 185 ...

£

Y8

437.00 02500

437.00 03200

437.00 13200

437.00 14000



Clamping Screw

84 950 ...

£

Y8

## Spare parts

### DCONWS

|    |             |      |       |
|----|-------------|------|-------|
| 25 | M4X12 (SW3) | 4.59 | 30000 |
| 32 | M5X14 (SW4) | 4.59 | 29900 |
| 40 | M6X16 (SW5) | 4.59 | 29800 |





→ Chapter 16 Adapters and accessories

Here you will find the suitable base adaptors.

# MaxiChange – 90° base holders for the exchangeable head system

## Scope of supply:

Includes clamping screws

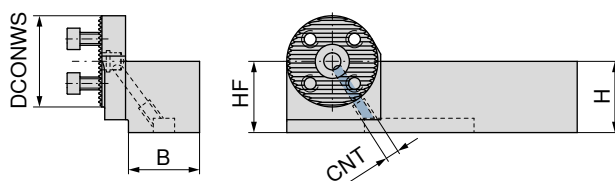

| DCONWS<br>mm | H<br>mm | B<br>mm | HF<br>mm | CNT  |
|--------------|---------|---------|----------|------|
| 25           | 20      | 20      | 20       | M8x1 |
| 32           | 20      | 20      | 20       | M8x1 |
| 32           | 25      | 25      | 25       | M8x1 |
| 40           | 25      | 25      | 25       | M8x1 |

NEW

84 184 ...

£

Y8

437.00 02500

437.00 03200

437.00 13200

437.00 14000



Clamping Screw

## Spare parts

### DCONWS

|    |             |      |       |
|----|-------------|------|-------|
| 25 | M4X12 (SW3) | 4.59 | 30000 |
| 32 | M4X12 (SW3) | 4.59 | 30000 |
| 40 | M6X16 (SW5) | 4.59 | 29800 |

84 950 ...

£



Y8




→ Chapter 16 Adapters and accessories

Here you will find the suitable base adaptors.

## MaxiChange-S – SCLC 95° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions



| DCONMS<br>mm | LF<br>mm | DMIN<br>mm | WF<br>mm | torque moment<br>Nm | Insert    | NEW<br>Left-hand<br>84 147 ...<br>£<br>Y8<br>359.00 01600<br>389.00 02000 | NEW<br>Right-hand<br>84 148 ...<br>£<br>Y8<br>359.00 01600<br>359.00 02000 |
|--------------|----------|------------|----------|---------------------|-----------|---------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 16           | 20       | 20         | 11       | 0.9                 | CC.. 0602 |                                                                           |                                                                            |
| 20           | 20       | 25         | 13       | 3                   | CC.. 09T3 |                                                                           |                                                                            |

### Spare parts

#### Insert

CC.. 0602

CC.. 09T3





Clamping screw


84 950 ...

£  
Y8  
7.00 44700  
8.43 27600

## MaxiChange-S – SDUC 93° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions



| DCONMS<br>mm | LF<br>mm | DMIN<br>mm | WF<br>mm | torque moment<br>Nm | Insert    | NEW<br>Left-hand<br>84 143 ...<br>£<br>Y8<br>359.00 01600<br>359.00 02000 | NEW<br>Right-hand<br>84 144 ...<br>£<br>Y8<br>359.00 01600<br>359.00 02000 |
|--------------|----------|------------|----------|---------------------|-----------|---------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 16           | 20       | 20         | 11       | 0.9                 | DC.. 0702 |                                                                           |                                                                            |
| 20           | 20       | 25         | 13       | 3                   | DC.. 11T3 |                                                                           |                                                                            |

### Spare parts

#### Insert

DC.. 0702

DC.. 11T3



Clamping screw

84 950 ...

£  
Y8  
7.00 44700  
8.43 27600





→ Chapter 9 – Turning Tools

Find suitable indexable inserts here.



## MaxiChange-S – SDQC 107.5° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions



| DCONMS<br>mm | LF<br>mm | DMIN<br>mm | WF<br>mm | torque moment<br>Nm | Insert    |
|--------------|----------|------------|----------|---------------------|-----------|
| 20           | 20       | 25         | 13       | 3                   | DC.. 11T3 |

| NEW               | NEW               |
|-------------------|-------------------|
| Left-hand         | Right-hand        |
| <b>84 145 ...</b> | <b>84 146 ...</b> |
| £<br>Y8           | £<br>Y8           |
| 359.00 02000      | 359.00 02000      |



Spare parts  
Insert  
DC.. 11T3



Clamping screw

|                   |
|-------------------|
| <b>84 950 ...</b> |
| £<br>Y8           |
| 8.43 27600        |

## MaxiChange-S – SVPC 117.5° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions



| DCONMS<br>mm | LF<br>mm | DMIN<br>mm | WF<br>mm | torque moment<br>Nm | Insert    |
|--------------|----------|------------|----------|---------------------|-----------|
| 25           | 35       | 32         | 17       | 3                   | VC.. 1103 |
| 32           | 35       | 40         | 22       | 3                   | VC.. 1604 |
| 40           | 40       | 50         | 27       | 3                   | VC.. 1604 |

| NEW               | NEW               |
|-------------------|-------------------|
| Left-hand         | Right-hand        |
| <b>84 176 ...</b> | <b>84 176 ...</b> |
| £<br>Y8           | £<br>Y8           |
| 365.00 12500      | 359.00 02500      |
| 371.00 13200      | 359.00 03200      |
| 371.00 14000      | 365.00 04000      |

Spare parts  
Insert  
VC.. 1103  
VC.. 1604





Clamping screw


|                   |
|-------------------|
| <b>84 950 ...</b> |
| £<br>Y8           |
| 8.43 27600        |

→ Chapter 9 – Turning Tools  
Find suitable indexable inserts here.

## MaxiChange-S – SVUC 93° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions




| DCONMS<br>mm | LF<br>mm | DMIN<br>mm | WF<br>mm | torque moment<br>Nm | Insert    |
|--------------|----------|------------|----------|---------------------|-----------|
| 20           | 20       | 25         | 13       | 3                   | VC.. 1103 |
| 25           | 35       | 32         | 17       | 3                   | VC.. 1103 |
| 32           | 35       | 40         | 22       | 3                   | VC.. 1604 |
| 40           | 40       | 50         | 27       | 3                   | VC.. 1604 |

| NEW<br>Left-hand |       | NEW<br>Right-hand |       |
|------------------|-------|-------------------|-------|
| 84 177 ...       |       | 84 177 ...        |       |
| £                | Y8    | £                 | Y8    |
| 365.00           | 12000 | 359.00            | 02000 |
| 365.00           | 12500 | 359.00            | 02500 |
| 371.00           | 13200 | 359.00            | 03200 |
| 371.00           | 14000 | 359.00            | 04000 |

### Spare parts

Insert  
VC.. 1103  
VC.. 1604





Clamping screw

84 950 ...

|      |       |
|------|-------|
| £    | Y8    |
| 8.43 | 27600 |
| 8.43 | 27600 |

## MaxiChange-S – SVQC 107.5° – Exchangeable cutting head with screw clamping



Illustrations show right-hand versions




| DCONMS<br>mm | LF<br>mm | DMIN<br>mm | WF<br>mm | torque moment<br>Nm | Insert    |
|--------------|----------|------------|----------|---------------------|-----------|
| 20           | 20       | 25         | 13       | 3                   | VC.. 1103 |
| 25           | 35       | 32         | 17       | 3                   | VC.. 1103 |
| 32           | 35       | 40         | 22       | 3                   | VC.. 1604 |
| 40           | 40       | 50         | 27       | 3                   | VC.. 1604 |

| NEW<br>Left-hand |       | NEW<br>Right-hand |       |
|------------------|-------|-------------------|-------|
| 84 178 ...       |       | 84 178 ...        |       |
| £                | Y8    | £                 | Y8    |
| 365.00           | 12000 | 359.00            | 02000 |
| 365.00           | 12500 | 359.00            | 02500 |
| 371.00           | 13200 | 359.00            | 03200 |
| 371.00           | 14000 | 359.00            | 04000 |

### Spare parts

Insert  
VC.. 1103  
VC.. 1604



Clamping screw

84 950 ...

|      |       |
|------|-------|
| £    | Y8    |
| 8.43 | 27600 |
| 8.43 | 27600 |





→ Chapter 9 – Turning Tools  
Find suitable indexable inserts here.

# MaxiChange-GX – GX-DC 16 exchangeable grooving head

▲ For grooving and turning

## Scope of supply:

Exchangeable grooving head with clamping claw and clamping screw

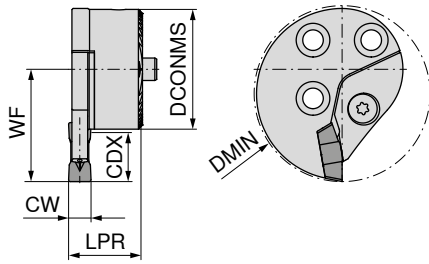

Illustrations show right-hand versions

| ISO designation           | DCONMS<br>mm | CW<br>mm | WF<br>mm | LPR<br>mm | DMIN<br>mm | CDX<br>mm | for grooving inserts | NEW<br>Left-hand |         | NEW<br>Right-hand |         |
|---------------------------|--------------|----------|----------|-----------|------------|-----------|----------------------|------------------|---------|-------------------|---------|
|                           |              |          |          |           |            |           |                      | 84 188 ...       | £<br>Y8 | 84 189 ...        | £<br>Y8 |
| WK25 R/L 14-DC GX 16-S2   | 25           | 2        | 27       | 16.00     | 41         | 14        | GX 16-1 ..N          | 342.00           | 22500   | 342.00            | 22500   |
| WK25 R/L 14-DC GX 16-S3   | 25           | 3        | 27       | 14.75     | 41         | 14        | GX 16-2 ..N          | 342.00           | 32500   | 342.00            | 32500   |
| WK25 R/L 14-DC GX 16-S4/5 | 25           | 4/5      | 27       | 15.75     | 41         | 14        | GX 16-3 ..N          | 342.00           | 42500   | 342.00            | 42500   |
| WK32 R/L 13-DC GX 16-S4/5 | 32           | 4/5      | 30       | 17.75     | 47         | 13        | GX 16-3 ..N          | 361.00           | 43200   | 361.00            | 43200   |
| WK32 R/L 13-DC GX 16-S6   | 32           | 6        | 30       | 19.35     | 47         | 13        | GX 16-3 ..N          | 361.00           | 63200   | 361.00            | 63200   |

| Spare parts<br>for Article no. | <br>Clamping claw |       |     | <br>O-Ring |       |            | <br>Clamping screw |       |         | <br>Guide pin |       |  |
|--------------------------------|------------------------------------------------------------------------------------------------------|-------|-----|-----------------------------------------------------------------------------------------------|-------|------------|---------------------------------------------------------------------------------------------------------|-------|---------|----------------------------------------------------------------------------------------------------|-------|--|
|                                | 84 950 ...                                                                                           |       |     | 84 950 ...                                                                                    |       |            | 84 950 ...                                                                                              |       |         | 84 950 ...                                                                                         |       |  |
|                                | £<br>Y8                                                                                              |       |     | £<br>Y8                                                                                       |       |            | £<br>Y8                                                                                                 |       |         | £<br>Y8                                                                                            |       |  |
| 84 189 22500                   | 77.00                                                                                                | 50400 | 2x1 | 6.00                                                                                          | 50300 | M4X4/T15   | 11.00                                                                                                   | 50000 | D3H6X10 | 7.00                                                                                               | 53000 |  |
| 84 188 22500                   | 77.00                                                                                                | 50500 | 2x1 | 6.00                                                                                          | 50300 | M4X4/T15   | 11.00                                                                                                   | 50000 | D3H6X10 | 7.00                                                                                               | 53000 |  |
| 84 189 32500                   | 77.00                                                                                                | 50600 | 2x1 | 6.00                                                                                          | 50300 | M4X4/T15   | 11.00                                                                                                   | 50000 | D3H6X10 | 7.00                                                                                               | 53000 |  |
| 84 188 32500                   | 77.00                                                                                                | 50700 | 2x1 | 6.00                                                                                          | 50300 | M4X4/T15   | 11.00                                                                                                   | 50000 | D3H6X10 | 7.00                                                                                               | 53000 |  |
| 84 189 42500                   | 77.00                                                                                                | 50800 | 2x1 | 6.00                                                                                          | 50300 | M4X4/T15   | 11.00                                                                                                   | 50000 | D3H6X10 | 7.00                                                                                               | 53000 |  |
| 84 188 42500                   | 77.00                                                                                                | 50900 | 2x1 | 6.00                                                                                          | 50300 | M4X4/T15   | 11.00                                                                                                   | 50000 | D3H6X10 | 7.00                                                                                               | 53000 |  |
| 84 189 43200                   | 83.00                                                                                                | 51000 | 2x1 | 6.00                                                                                          | 50300 | M5X5,5/T15 | 12.00                                                                                                   | 50100 | D4H6X10 | 7.00                                                                                               | 53100 |  |
| 84 188 43200                   | 83.00                                                                                                | 51100 | 2x1 | 6.00                                                                                          | 50300 | M5X5,5/T15 | 12.00                                                                                                   | 50100 | D4H6X10 | 7.00                                                                                               | 53100 |  |
| 84 189 63200                   | 83.00                                                                                                | 51200 | 2x1 | 6.00                                                                                          | 50300 | M5X5,5/T15 | 12.00                                                                                                   | 50100 | D4H6X10 | 7.00                                                                                               | 53100 |  |
| 84 188 63200                   | 83.00                                                                                                | 51300 | 2x1 | 6.00                                                                                          | 50300 | M5X5,5/T15 | 12.00                                                                                                   | 50100 | D4H6X10 | 7.00                                                                                               | 53100 |  |



→ Chapter 11 – Grooving tools



Find suitable grooving inserts here.

# MaxiChange-GX – GX-DC 24 axial exchangeable grooving head

▲ For axial grooving



## Scope of supply:

Exchangeable grooving head with clamping claw and clamping screw

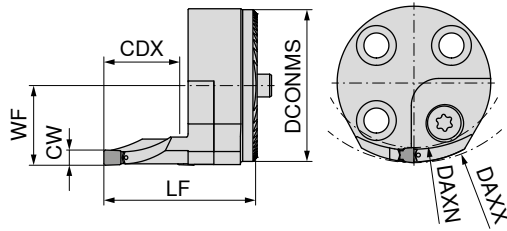

Illustrations show right-hand versions

| ISO designation                  | DCONMS<br>mm | DAXN<br>mm | DAXX<br>mm | CW<br>mm | WF<br>mm | LF<br>mm | CDX<br>mm | for grooving inserts | NEW<br>Left-hand<br>84 186 ... |       | NEW<br>Right-hand<br>84 187 ... |       |
|----------------------------------|--------------|------------|------------|----------|----------|----------|-----------|----------------------|--------------------------------|-------|---------------------------------|-------|
|                                  |              |            |            |          |          |          |           |                      | £<br>Y8                        |       | £<br>Y8                         |       |
| WK40 R/L 20-DC GX 24-S3 D50-70   | 40           | 50         | 70         | 3        | 21       | 40       | 20        | GX 24-2 ..N          | 437.00                         | 34000 | 437.00                          | 34000 |
| WK40 R/L 20-DC GX 24-S3 D70-100  | 40           | 70         | 100        | 3        | 21       | 40       | 20        | GX 24-2 ..N          | 437.00                         | 34100 | 437.00                          | 34100 |
| WK40 R/L 20-DC GX 24-S3 D100-150 | 40           | 100        | 150        | 3        | 21       | 40       | 20        | GX 24-2 ..N          | 437.00                         | 34200 | 437.00                          | 34200 |
| WK40 R/L 20-DC GX 24-S3 D150-300 | 40           | 150        | 300        | 3        | 21       | 40       | 20        | GX 24-2 ..N          | 437.00                         | 34300 | 437.00                          | 34300 |
| WK40 R/L 20-DC GX 24-S4 D50-70   | 40           | 50         | 70         | 4        | 21       | 40       | 20        | GX 24-3 ..N          | 465.00                         | 44000 | 465.00                          | 44000 |
| WK40 R/L 20-DC GX 24-S4 D70-100  | 40           | 70         | 100        | 4        | 21       | 40       | 20        | GX 24-3 ..N          | 465.00                         | 44100 | 465.00                          | 44100 |
| WK40 R/L 20-DC GX 24-S4 D100-150 | 40           | 100        | 150        | 4        | 21       | 40       | 20        | GX 24-3 ..N          | 465.00                         | 44200 | 465.00                          | 44200 |
| WK40 R/L 20-DC GX 24-S4 D150-300 | 40           | 150        | 300        | 4        | 21       | 40       | 20        | GX 24-3 ..N          | 465.00                         | 44300 | 465.00                          | 44300 |



| Spare parts<br>for Article no. | 84 950 ... |       | 84 950 ... |      | 84 950 ... |              | 84 950 ... |       |         |      |       |
|--------------------------------|------------|-------|------------|------|------------|--------------|------------|-------|---------|------|-------|
|                                | £<br>Y8    |       | £<br>Y8    |      | £<br>Y8    |              | £<br>Y8    |       |         |      |       |
| 84 187 34000                   | 86.00      | 51400 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 34000                   | 86.00      | 51800 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 34100                   | 88.00      | 51500 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 34100                   | 88.00      | 51900 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 34200                   | 90.00      | 51600 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 34200                   | 90.00      | 52000 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 34300                   | 95.00      | 51700 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 34300                   | 95.00      | 52100 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 44000                   | 86.00      | 52200 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 44000                   | 86.00      | 52600 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 44100                   | 88.00      | 52300 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 44100                   | 88.00      | 52700 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 44200                   | 90.00      | 52400 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 44200                   | 90.00      | 52800 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 187 44300                   | 95.00      | 52500 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |
| 84 186 44300                   | 95.00      | 52900 | 2x1        | 6.00 | 50300      | M6x0,5X5/T25 | 14.00      | 50200 | D4H6X12 | 7.00 | 53200 |





→ Chapter 11 – Grooving tools

Find suitable grooving inserts here.

# ER collet with internal square

- ▲ Similar DIN ISO 15488-A (old DIN 6499-A)
- ▲ 8 times slotted
- ▲ Double taper collets for holding taps on synchronised spindle machines, without compensating lengths

ER-A  
15 µm



NEW

BD = 16.7  
OAL = 27.5  
426 E / ER16

82 695 ...

| DCONWS |  |       |       |
|--------|--|-------|-------|
| mm     |  | £     | Y8    |
| 2.8    |  | 41.55 | 02800 |
| 3.5    |  | 41.55 | 03500 |
| 4.0    |  | 41.55 | 04000 |
| 4.5    |  | 41.55 | 04500 |
| 5.0    |  | 41.55 | 05000 |
| 5.5    |  | 41.55 | 05500 |
| 6.0    |  | 41.55 | 06000 |
| 7.0    |  | 41.55 | 07000 |
| 8.0    |  | 41.55 | 08000 |
| 9.0    |  | 41.55 | 09000 |



# From the eCatalogue to the shopping basket

The complete cutting tool solution  
is available in a digital version!





[cutting.tools/uk/en/digitalcatalogue](https://cutting.tools/uk/en/digitalcatalogue)

## Console

- ▲ With integrated MNG mini zero point clamping system
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

**MNG  
mini**

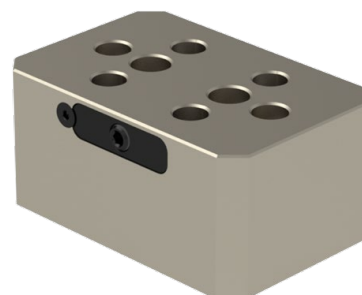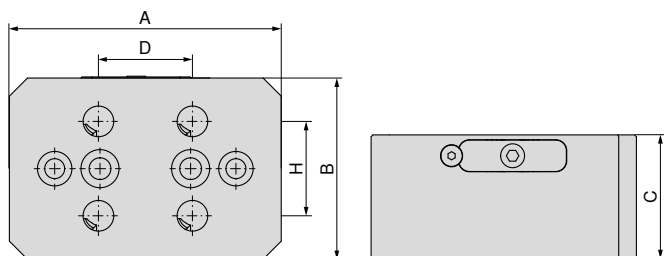

**NEW**

**80 915 ...**

£  
Y4



1,100.00 57000

| A   | B   | C  | D  | H  |
|-----|-----|----|----|----|
| mm  | mm  | mm | mm | mm |
| 150 | 100 | 70 | 52 | 52 |

## Three-sided pyramid

- ▲ Incl. 3 x MNG mini zero point clamping systems
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

**MNG  
mini**

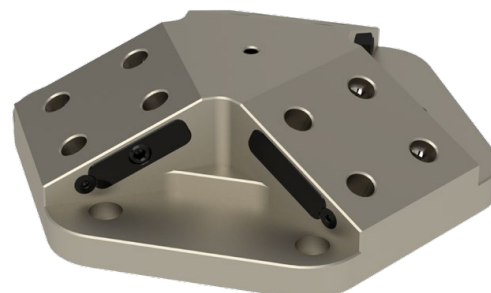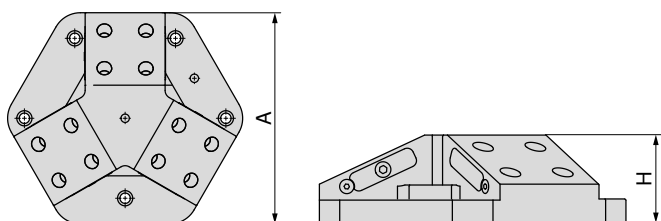

**NEW**

**80 915 ...**

£  
Y4


2,700.00 58000

| A   | H  |
|-----|----|
| mm  | mm |
| 264 | 75 |

## Four-sided pyramid

- ▲ Incl. 4 x MNG mini zero point clamping systems
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

**MNG  
mini**

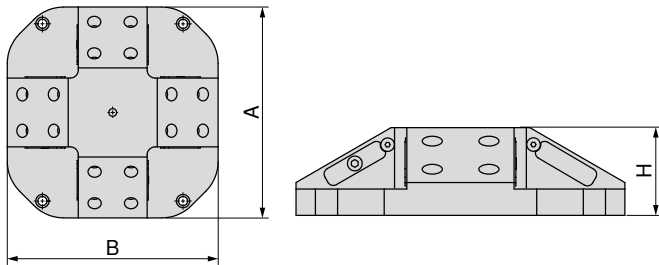

**NEW**

**80 915 ...**

£  
Y4


3,100.00 57500

| A   | B   | H  |
|-----|-----|----|
| mm  | mm  | mm |
| 300 | 300 | 80 |

## Triangular tombstone

- ▲ Incl. 3 x MNG mini zero point clamping systems
- ▲ Order mounting bolts separately
- ▲ Material: hard-anodised aluminium

**MNG  
mini**

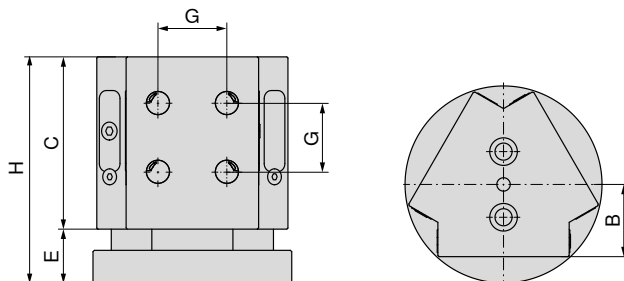

**NEW**

**80 915 ...**

£  
Y4

2,100.00 51700

| B  | C   | E  | G  | H   |
|----|-----|----|----|-----|
| mm | mm  | mm | mm | mm  |
| 55 | 130 | 41 | 52 | 171 |




## MNG mini mounting bolt set

### Scope of supply:

Set contains four mounting bolts

**MNG  
mini**



**NEW**

**80 915 ...**

£  
Y4

73.70 51600

| D <sub>1</sub> h6<br>mm | D <sub>2</sub> h6<br>mm | M<br>mm | G<br>mm | TQX<br>Nm | Clamping force<br>kN |
|-------------------------|-------------------------|---------|---------|-----------|----------------------|
| 16                      | 12                      | 22      | M8      | 18        | 15                   |

## Clamping Screw Set for T-slot for MNG mini

### Scope of supply:

Clamping screw and T-Nuts

**MNG  
mini**



**NEW**

**80 915 ...**

£  
Y4

18.37 61200  
18.37 61400  
19.69 61600  
20.90 61800

| for slot width<br>mm | G   |
|----------------------|-----|
| 12                   | M10 |
| 14                   | M12 |
| 16                   | M12 |
| 18                   | M12 |

## Alignment/centering set for T-slots

▲ MNG – Mechanical Zero-point Clamping System

▲ A = groove spacing

### Scope of supply:

1 Terminal block, 2 T-nuts, 2 screws, 2 washers  
for width 12 mm, without clamping strip!

**MNG  
mini**



**NEW**

**80 915 ...**

£  
Y4

99.77 81200  
99.77 81400  
99.77 81600  
99.77 81800

| A<br>mm | for slot width<br>mm |
|---------|----------------------|
| 100     | 12                   |
| 100     | 14                   |
| 100     | 16                   |
| 100     | 18                   |

## Socket

▲ Suitable for 1/2" or 3/8" square drive

**MNG  
mini**



**NEW**

**80 877 ...**

£  
Y4



19.25 10600

| Square | DRVS<br>mm |
|--------|------------|
| 3/8"   | 6          |

## System jaws overview

### Soft jaw, steel, fixed



- ▲ for producing shaped jaws
- ▲ Price per piece



|                |     |                |    |                |                |   |    |                |                | NEW    |              |     |               |            |       |       |       |       |          |       |       |     |
|----------------|-----|----------------|----|----------------|----------------|---|----|----------------|----------------|--------|--------------|-----|---------------|------------|-------|-------|-------|-------|----------|-------|-------|-----|
| For vice width | A   | A <sub>1</sub> | D  | D <sub>1</sub> | D <sub>2</sub> | E | M  | M <sub>1</sub> | M <sub>2</sub> | £      | Y4           | NCG | H6G / -S / -Z | X5G-Z / -S | ESG 4 | ESG 5 | HDG 2 | ZSG 4 | ZSG mini | DSG 4 | Verso | HSG |
| 80             | 80  |                | 28 |                |                |   | 48 |                |                | 110.00 | 80 901 31800 |     |               |            | ●     | ●     |       |       |          |       |       |     |
| 125            | 125 |                | 40 |                |                |   | 68 |                |                | 132.00 | 80 901 31900 |     |               |            | ●     | ●     |       |       |          |       |       |     |

### Soft jaw, steel, movable

- ▲ for producing shaped jaws
- ▲ Price per piece



|                |     |                |    |                |                |   |    |                |                |        | NEW          |     |               |            |       |       |       |       |          |       |       |     |  |
|----------------|-----|----------------|----|----------------|----------------|---|----|----------------|----------------|--------|--------------|-----|---------------|------------|-------|-------|-------|-------|----------|-------|-------|-----|--|
| For vice width | A   | A <sub>1</sub> | D  | D <sub>1</sub> | D <sub>2</sub> | E | M  | M <sub>1</sub> | M <sub>2</sub> | £      | Y4           | NCG | H5G / -S / -Z | X5G-Z / -S | ESG 4 | ESG 5 | HDG 2 | ZSG 4 | ZSG mini | DSG 4 | Verso | HSG |  |
| 80             | 80  |                | 28 |                |                |   | 48 |                |                | 94.60  | 80 878 32000 |     |               |            | ●     | ●     |       | ●     |          |       |       |     |  |
| 125            | 125 |                | 40 |                |                |   | 68 |                |                | 118.80 | 80 878 32100 |     |               |            | ●     | ●     |       | ●     |          |       |       |     |  |











# JUST OUR THING

ENGINEERS FIRST AND FOREMOST.

TECHNICAL SUPPORT.  
WHEN YOU NEED IT MOST.

OUR WAREHOUSE IN YOUR  
MACHINE SHOP.

[www.just-our-thing.com](http://www.just-our-thing.com)

THE  
Cutting Tool Solution



CERATIZIT UK & IRELAND LTD  
Europa Link \ UK-Sheffield S9 1XU  
Tel.: +44 114 242 8 820  
[info.uk@ceratizit.com](mailto:info.uk@ceratizit.com) \ [www.ceratizit.com](http://www.ceratizit.com)



Part of the Plansee Group