


UP2DATE

STAINLESS STEEL TURNING!

DURABLE | RELIABLE |
COMPLETE

New grades CTCM120 and CTCM130
with the innovative Dragonskin coating
for the best performance

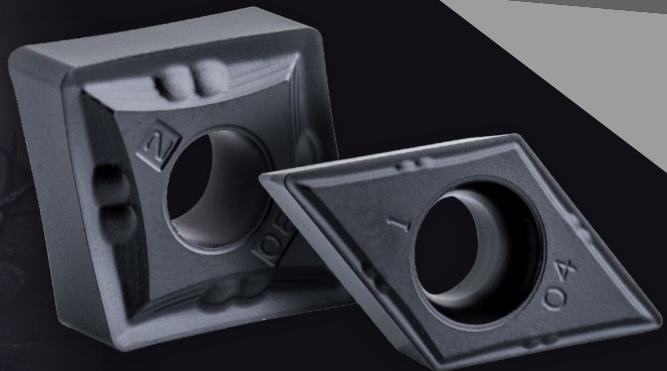

DRAGONSkin
by CERATIZIT

... AND SOME MORE
DRAGONSkin PRODUCTS

- ▲ WTX Feed BR
- ▲ New grade in indexable insert milling CTCM245
- ▲ MonsterMill PCR-ALU
- ▲ and much more

TEAM CUTTING TOOLS



KOMET



KLENK

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

Tooling the Future

www.ceratizit.com

Welcome!



Placing your order is quick and easy

Customer Service Centre

Freephone Number

UK: 0800 073 2073
Ireland: 1800 93 22 55

Freefax Number

UK: 0800 073 2074

E-Mail

info.uk@ceratizit.com



It couldn't be easier

Ordering via the Online Shop

<http://cuttingtools.ceratizit.com>



On-site technical support

Your Local Technical Sales Engineer

Your customer number

DRAGONSkin

by CERATIZIT




Dragonskin – The coatings for the highest performance

We have focused all our innovative strength and expert knowledge in powder metallurgy on one particular objective: developing a tool coating that allows you as a customer to achieve an unprecedented level of performance in machining. We have succeeded in our efforts with the Dragonskin coating technology.

This technology offers the highest degree of protection against external influences and effectively prevents premature tool wear. The virtually impenetrable layer has been specially developed for the toughest requirements and can cope with any machining task. The extremely hard surface also catches the eye with its exceptionally refined appearance.

The perfect combination of state-of-the-art high-performance substrates and advanced coating structure achieves high cutting speeds and increased process security. **Proven increase in performance of up to 80%** our advanced Dragonskin coating technology provides you with a significant competitive advantage.

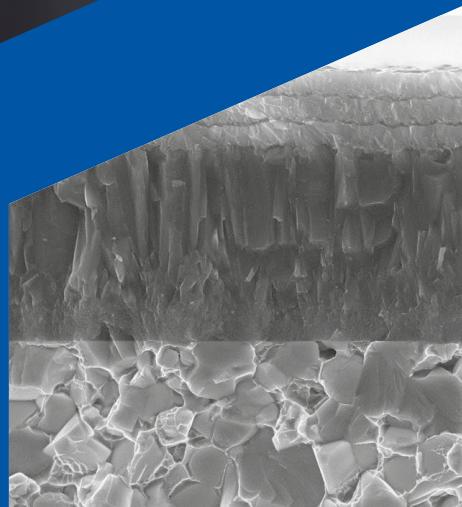

The product category Dragonskin is intended to help make tools easily recognizable and quick to find using CERATIZIT's high-performance coating technology. All products that are marked with the Dragonskin icon represent unmatchable performance, maximum tool life and maximum process reliability.

Dragonskin Coating

Dragonskin products

Solid carbide drilling

24–27 WTX – Feed BR

28+29 WTX – short step drill

Turning Tools

66–83 CTCM120 and CTCM130 for stainless turning

Solid Carbide milling cutters

94–104 MonsterMill – plunge milling cutter with chip breaker

Milling tools with indexable inserts

114–127 Grade CTCM245

128–131 XDKT inserts for the MaxiMill 211-20 system

Machining without compromise

The new ISO-M grades for high performance turning in stainless materials are here





Dragonskin – new grades with the high-performance coating technology from CERATIZIT

Always the right solution for machining austenitic, stainless steels. In addition to the established CTPM125, two new grades now round off our product range: the more wear-resistant CTCM120 and the tougher CTCM130. Thanks to the Dragonskin coating, both grades are high performers and process-secure.



NEW

CTCM120

- ▲ Wear-resistant grade for austenitic steels
- ▲ High cutting speeds
- ▲ For a smooth cut



NEW

CTCM130

- ▲ Tough carbide grade for interrupted cuts
- ▲ Guaranteed process security
- ▲ For lower cutting speeds and unstable conditions

DRAGONSKIN

CTPM125


- ▲ Universal carbide grade
- ▲ Good balance between toughness and elevated-temperature resistance
- ▲ High level of reliability for machining austenitic or stainless steels

DRAGONSKIN

Test Report

Material 1.4301; X5CrNi18-10
 v_c 160 m/min
 f 0.35 mm/rev
 a_p 1–3 mm

+50%

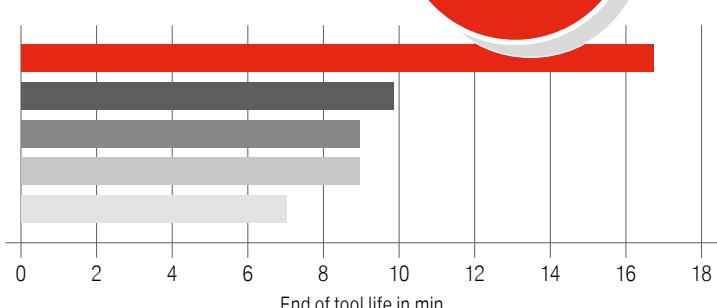

	End of tool life in min.
CTCM120	16,5
CTPM125	9,9
Competitor 1	8,8
Competitor 2	8,8
Competitor 3	7,7

This diagram illustrates the machining results produced by the new CVD-coated CTCM120 cutting material grade when turning austenitic, stainless steels. The new grades were developed specifically for these V2A (e.g. 1.4301) and V4A (1.4545) material groups, which are the most commonly used stainless steels. During this trial, the new grade was compared with the established CTPM125 and the benchmark and was taken through to the end of the tool life. The new development from CERATIZIT excelled with **over 50% longer tool life** than the competition.

“


The different coating technologies for the grades (PVD and CVD) enable us to adapt perfectly to the pretreatment of the material to be machined.

CERATIZIT Product Manager, Stefan Karl

We never stop developing new solutions –
we are now offering a complete “stainless package”

Advantages/benefits

- ▲ Three steps and three grades seamlessly cover all application ranges for the machining of austenitic, stainless steels
Clear, consistent range and easy selection of indexable insert
- ▲ CTCM120 – highly wear-resistant grade for high cutting speeds
High cutting speed and longer service life increases productivity
- ▲ CTPM125 – universal grade for all applications, including interrupted cuts
Universal application with high reliability and outstanding performance
- ▲ CTCM130 – tough grade for interrupted cuts and difficult conditions
For maximum process security and reduction of the scrap rate

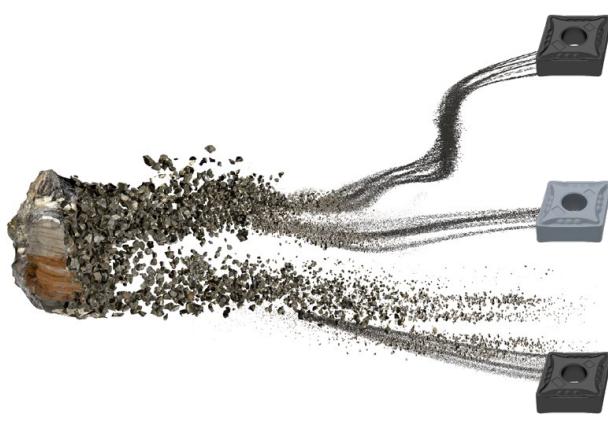


Further information on the product can be found on page 66–83

The product range


The complete range for austenitic, stainless steels is characterised not only by the precise coordination of the grades but also by the geometric consistency between the chip breakers.

You can choose between three (negative inserts) or two (positive inserts) chip breakers depending on your application. Available in all three grades!

Overview of chip breakers – negative inserts

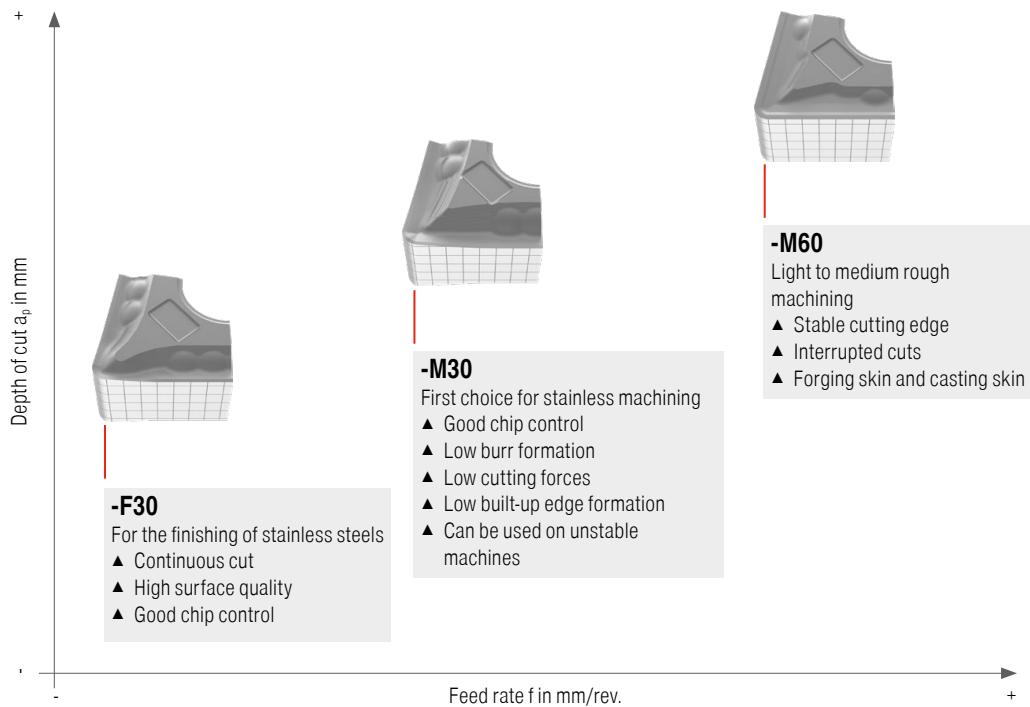

Overview of chip breakers – positive inserts

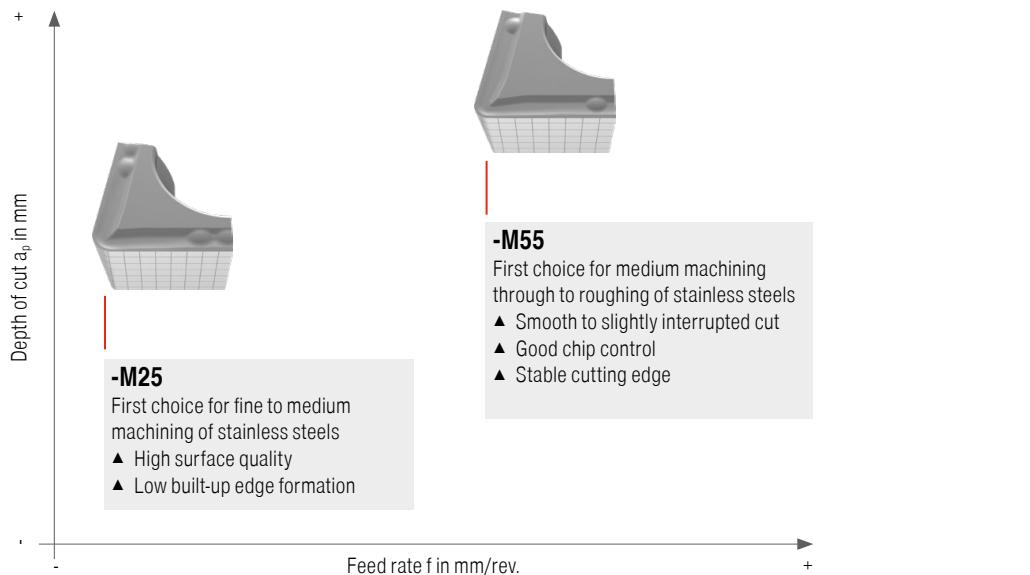

Important information regarding the machining of stainless materials can be found on → page 82+83



cuttingtools.ceratizit.com/gb/en/ctcm-iso-m

CONCLUSION

We now have an all-round, harmonised product range for austenitic, stainless steels. Thanks to the geometric consistency across all three ISO M grades, the tool can be matched to the application in question perfectly in the form of an indexable insert.

WTX Feed BR

Drill reamer with 3 effective cutting edges makes for a short working process



Further information on the product can be found on page 24–27



Spot drilling, drilling and reaming to a tolerance of H7 in just one operation? The WTX Feed BR drill reamer enables you to do just that. With this exciting new development, we are once again responding to the main requirements presented to us by the machining market, namely to continuously streamline and improve our customers' production processes taking into account new materials and machining methods. Decades of experience in the development of maximum efficiency cutting tools have enabled us to develop a solid carbide drill reamer that is currently the only one of its kind. Three effective cutting edges shorten the working process significantly and ensure maximum accuracy and surface quality.



cuttingtools.ceratizit.com/gb/en/wtx-feed-br




Features

- ▲ Increased cylindricity and improved roundness of the hole
- ▲ Significantly narrower tolerance field of the holes produced
- ▲ Higher cutting speeds thanks to the three effective cutting edges
- ▲ Improved centring and positioning properties
- ▲ Universal drill reamer
- ▲ Specially designed for steel and cast iron machining
- ▲ Lower cutting forces
- ▲ Good surface quality can be obtained

DRAGONSKIN


DPX14S – Dragonskin coating:

- ✚ TiAlN nanolayer coating
- ✚ Coefficient of friction (dry, against steel) = 0.35
- ✚ Maximum application temperature: 1000 °C

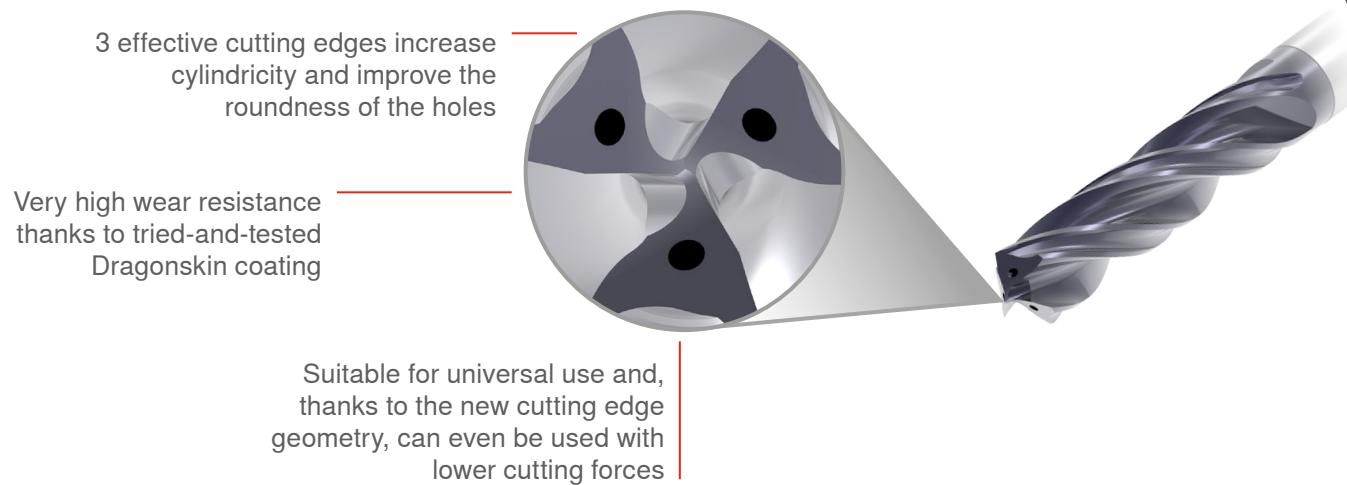

Drilling test in 42CRMOS4 – diameter deviation from measured tool Ø

Tool diameter: DC = 8.00 mm (8H7 hole)

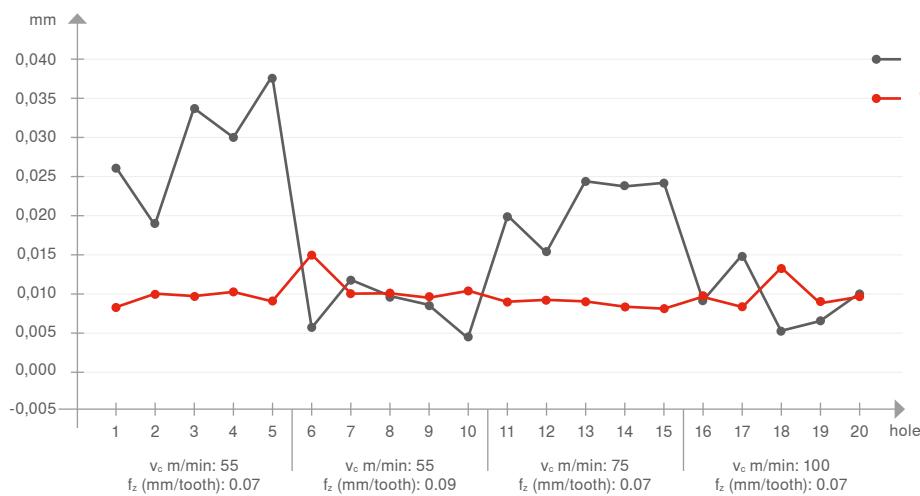

Ø
Reduced deviation
of
0,013
mm

KUB Pentron CS

Drilling to Ø 96 mm –
now anything is possible!

KOMET

ABS interface

- ▲ Improved force transmission for optimum machining results
- ▲ Greater degree of accuracy and higher cutting speeds
- ▲ Higher clamping force

Basic element

- ▲ Burnished, wear-resistant KUB Pentron base holder in the accustomed high quality from KOMET

Modular System

- ▲ Process-secure, reliable
- ▲ Interchangeable
- ▲ Minimises tool costs

Cartridge solution with tried-and-tested SOGX indexable inserts

- ▲ A certain diameter range can be covered with a holder and a suitable internal cartridge
- ▲ The external cartridge must be adapted to the nominal outer diameter
- ▲ Existing SOGX indexable inserts from the standard portfolio
- ▲ Universal application, powerful, specialised

Further information on the product can be found on page 30–34

cuttingtools.ceratizit.com/gb/en/kub-pentron-cs

THE ENTIRE KUB PENTRON FAMILY



CTCM245

The new benchmark for machining high-alloy steels




The new CTCM245 grade features an optimised coating and substrate combination that has been specially developed for machining high-alloy steels. As a user, you benefit from high cutting speeds and excellent results in the dry machining of the following materials:

- ▲ Materials containing chromium (tool steels)
- ▲ Martensitic, stainless steels
- ▲ High-alloy, austenitic, stainless steels

The special properties of the grade make it suitable for dry machining, which means that thermal shocks can be effectively prevented. The CTCM245 also has a high temperature resistance, which means that higher cutting speeds are possible when machining high-alloy steels. Process security is also guaranteed. Thanks to state-of-the-art CVD technology, the grade also guarantees a seamless machining process. In application ranges that require secure processes, a long service life and strong performance, the CTCM245 impresses across the board.

Science and technology – an unbeatable combination that ensures optimum machining.

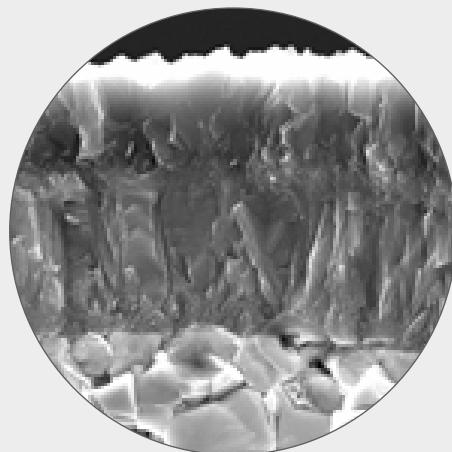

DRAGONSKIN

- ▲ Al_2O_3 coating for excellent temperature resistance (high thermal and chemical stability), reduces flank and crater wear.
- ▲ TiCN coating for a high degree of hardness and toughness reduces abrasive and flank wear.
- ▲ Compound layer to guarantee the effectiveness of the coating combination. Adverse effects caused by diffusion are prevented.
- ▲ Very tough substrate that guarantees a long service life and is extremely wear- and temperature-resistant. The extreme hardness also ensures a high resistance to breakage.



Competitor comparison

Face milling with button inserts

Material:

1.4301
Tool: RPHX 1204M6SN-M50 CTCM245

v_c :

235 m/min

f_z :

0,28 mm

a_p :

1,5 mm

CERATIZIT

Competitor

Number of finished components



Turbine blade machining

Material:

St-17/13W
Tool: RPHX 1204M4SN-F50 CTCM245

v_c :

270 m/min

f_z :

0,33 mm

a_p :

2,0 mm

a_e :

40 mm

CERATIZIT

Competitor

Service life in min



“

A full understanding of the interaction between workpiece material, tool geometry, tool material and cutting parameters is essential when it comes to producing maximum power in demanding applications.

The CERATIZIT development team



Further information on the product can be found on page 114–127





KOMflex

Combined system with precision
adjustment head and BLUM measuring
probe technology

Unique, automated compensation system

In conjunction with the BLUM measuring probe, the KOMflex enables automated diameter correction for precision holes in unmanned closed-loop operation. The KOMflex precision adjustment head communicates with the BLUM wireless machine equipment.

Advantages Benefits

- ▲ **Automated production of precision holes**
Thanks to closed-loop operation, the KOMflex guarantees process-secure machining, even in the case of unmanned operations.
- ▲ **Significant time savings**
Thanks to automated measurement with the BLUM measuring probe and correction with the precision adjustment head.
- ▲ **Ensures the defined quality requirements for the workpiece are met**
Thanks to accurate movement of the precision adjustment head for μm -precise machining with closed-loop operation.


Technical data

Adjustment accuracy	1 μm in radius
Adjustment range	$\pm 0.25 \text{ mm}$
Boring range	$\varnothing 1 - 120 \text{ mm}$
Outer diameter	63 mm
Height	100 mm
Max. RPM	8,000 rpm in centre position
Combined tool interface	ABS 32 / dia. 16 mm / teeth
Interface	ABS 50


Compensation of
cutting edge wear,
e.g. in the case of
steel

System usage

Temperature
compensation,
e.g. in the case of
aluminium

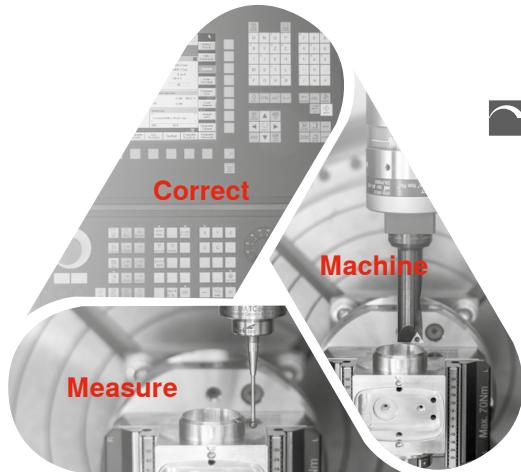

**Combines the production steps
from machining to quality
assurance in a closed-loop
system**

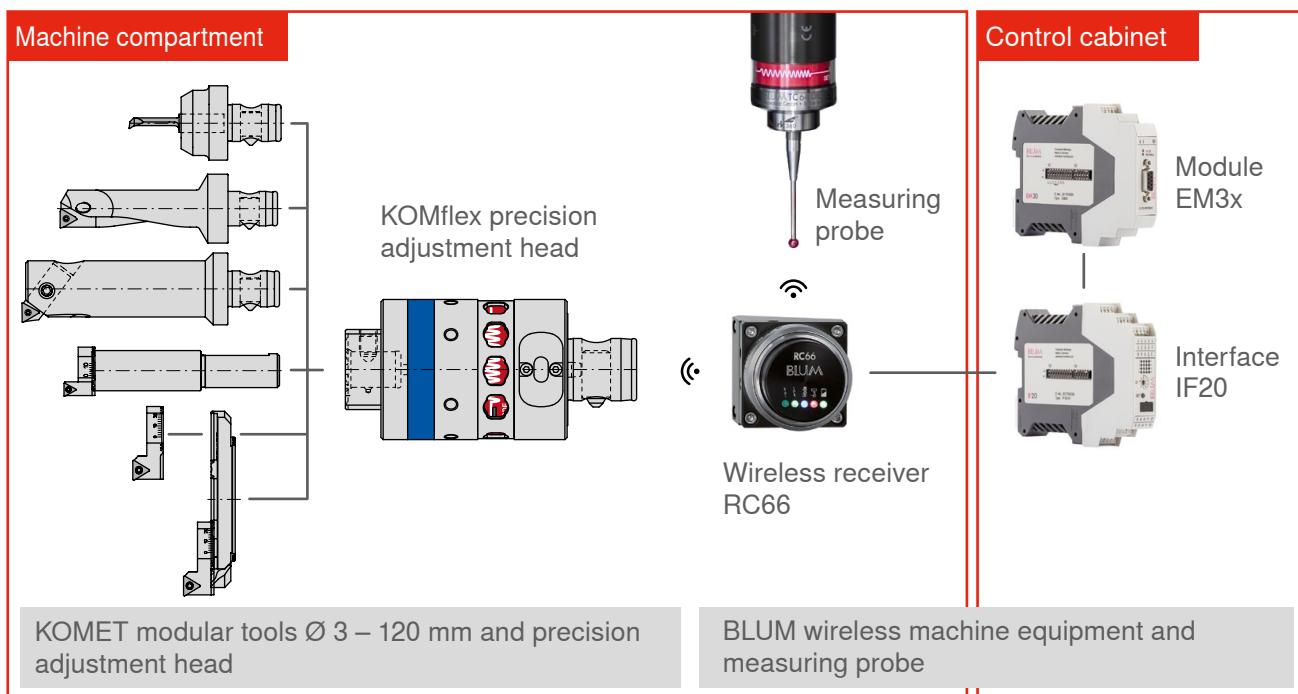

“

The ongoing automation of our production processes will enable us to continue to manufacture our products cost-effectively in future. The KOMflex is the ideal solution for closed-loop operation. This is where we need innovative, forward-thinking partners like CERATIZIT.

Michael Renz, Head of the Actuating Tools product line at KOMET Deutschland GmbH (left),
Alexander Schweiher, Senior Manager at Schweiher Werkzeugbau GmbH & Co. KG (right)



KOMlife


Autonomous acquisition of production data accurate to the second



Autonomous acquisition and processing of production data directly on the respective tool

Advantages Benefits

- ▲ **Planned, preventative maintenance**
Regular, advance maintenance planning can increase tool service life and ensure workpiece quality at all times.
- ▲ **Digital production data acquisition**
Through a patented, dynamic QR code and the KOMlife app.
- ▲ **Assessment of tool use**
Conclusions can be drawn about the status and load of the cutting edge by gathering data on tool use.
- ▲ **Not dependent on tool manufacturer**
KOMlife can be easily integrated into new and existing linear and rotating systems, irrespective of the tool manufacturer.



Technical data

Lithium battery	CR2032
Battery life	Approx. 2 years
Min. acceleration	1,5 g
Min. tool diameter	50 mm




cuttingtools.ceratizit.com/gb/en/komlife



Ergonomic display unit

- ▲ Number of operating hours
- ▲ Current status of the maintenance interval
- ▲ Dimensions: 30 x 30 x 11 mm

KOMlife deactivated

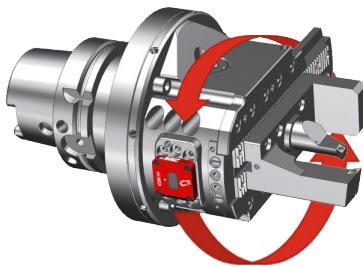

Tool rotates

Can be used with various tool systems

- ▲ With linear or rotary acceleration greater than 1.5 g
- ▲ Required installation space: 30.1 x 30.1 x 10 mm



Maintenance interval reached

Customer-specific adaptation

- ▲ Adjustable maintenance interval depending on the application
- ▲ Visualisation of the necessary tool maintenance with a red, flashing LED

QR code screen



Digital display of production data

Patented, dynamic QR code

- ▲ Digital acquisition and export of production data via smartphone and KOMlife app
- ▲ Display of serial number and production data



**Try me out with the
KOMlife app!**

Free KOMlife app in the App Store
for iOS® devices




SPECIALIST FOR INDEXABLE INSERT TOOLS FOR TURNING, MILLING AND GROOVING

Product Range:

- ▲ Turning Tools
- ▲ EcoCut Multifunction Tools and FreeTurn
- ▲ Grooving Tools
- ▲ Milling Tools with Indexable Inserts
- ▲ Tools made from ultra-hard cutting materials

The product brand CERATIZIT stands for high-quality indexable insert tools. The products are characterized by their high quality and contain the DNA of many years of experience in the development and production of carbide tools.

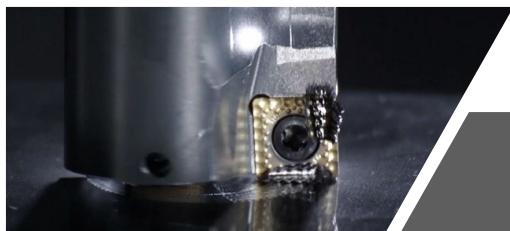

THE QUALITY LABEL FOR EFFICIENT BORE PRODUCTION

Product Range:

- ▲ Indexable Insert Drilling
- ▲ Reaming and Countersinking
- ▲ Spindle Tooling
- ▲ Actuating Tools

High-precision drilling, reaming, countersinking and boring is a matter of expertise: efficient tooling solutions for drilling and mechatronic tools are therefore part of the KOMET brand name.



EXPERTS FOR ROTATING TOOLS, TOOL HOLDERS AND CLAMPING SOLUTIONS

Product Range:

- ▲ HSS Drilling
- ▲ Solid Carbide Drilling
- ▲ Taps and Thread Formers
- ▲ Circular and Thread Milling
- ▲ Thread Turning
- ▲ Miniature Turning Tools
- ▲ HSS Milling Cutters
- ▲ Solid Carbide Milling Cutters
- ▲ Adapters
- ▲ Workpiece Clamping

WNT is synonymous with product diversity: solid carbide and HSS rotating tools, tool holders and efficient workholding solutions are all part of this brand.



CUTTING TOOLS FOR THE AEROSPACE INDUSTRY

Product Range:

- ▲ Solid Carbide Drilling for the Aerospace Industry

Solid carbide drills specially developed for the aerospace industry bear the product name KLENK. The highly specialized products are specifically designed for machining lightweight materials.



CTCM120 / CTCM130



WTX Feed BR

Table of contents



Solid carbide drilling

-
- 24–27** **WTX – Feed BR**
 - 28–29** WTX – short step drill

■ KOMET Indexable insert drills

- 32–34** **KUB Pentron CS**
- 35–41** KUB Pentron – extension

■ KOMET Reaming and Countersinking

- 42–44** Solid carbide reamers type H
- 45–48** Insert countersink 60°/90°

■ KOMET Spindle Tooling

- 50–51** FF precision adjustment head
- 52–54** MicroKom – M03Speed – precision adjustment head
- 55–60** TwinKOM
- 59** Digital stick



Circular and Thread Milling

- 62+63** Shank thread milling cutter – type Micro
- 64+65** Circular shank thread milling cutter



KUB Pentron CS



CTCM245



Turning Tools

66–83 CTCM120 and CTCM130 for stainless turning

84–93 Standard line – turning



Solid Carbide milling cutters

94–104 MonsterMill – plunge milling cutter with chip breaker

106–112 Mini cutter



Milling tools with indexable inserts

114–127 Grade CTCM245

128–131 XDKT inserts for the MaxiMill 211-20 system



Adapters

132–143 Variable tool holder systems

144 PSC drill chuck

145–150 Adapter

151–155 VDI tool holder with cylindrical shank

156+157 Bar pullers




Accessories

158 Cleaning propeller

159 Tightening Key


WTX – Drill-Reamer -1/100

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes



Feed
BR100
DPX14S

DRAGONSKIN



HA
▷ 140°
Solid carbide
NEW T4

DC $\pm 0,003$	DCONMS h_6	OAL	LCF	LU	LS	Article no. 10 707 ...	£
mm	mm	mm	mm	mm	mm		
3.97	6	66	24	17	36	130.72 03970	
3.98	6	66	24	17	36	130.72 03980	
3.99	6	66	24	17	36	130.72 03990	
4.00	6	66	24	17	36	130.72 04000	
4.01	6	66	24	17	36	130.72 04010	
4.02	6	66	24	17	36	130.72 04020	
4.97	6	66	28	20	36	130.72 04970	
4.98	6	66	28	20	36	130.72 04980	
4.99	6	66	28	20	36	130.72 04990	
5.00	6	66	28	20	36	130.72 05000	
5.01	6	66	28	20	36	130.72 05010	
5.02	6	66	28	20	36	130.72 05020	
5.97	6	66	28	20	36	130.72 05970	
5.98	6	66	28	20	36	130.72 05980	
5.99	6	66	28	20	36	130.72 05990	
6.00	6	66	28	20	36	130.72 06000	
6.01	6	66	28	20	36	130.72 06010	
6.02	6	66	28	20	36	130.72 06020	
7.97	8	79	41	29	36	130.72 07970	
7.98	8	79	41	29	36	130.72 07980	
7.99	8	79	41	29	36	130.72 07990	
8.00	8	79	41	29	36	130.72 08000	
8.01	8	79	41	29	36	130.72 08010	
8.02	8	79	41	29	36	130.72 08020	
9.97	10	89	47	35	40	148.77 09970	
9.98	10	89	47	35	40	148.77 09980	
9.99	10	89	47	35	40	148.77 09990	
10.00	10	89	47	35	40	148.77 10000	
10.01	10	89	47	35	40	148.77 10010	
10.02	10	89	47	35	40	148.77 10020	
11.97	12	102	55	40	45	203.87 11970	
11.98	12	102	55	40	45	203.87 11980	
11.99	12	102	55	40	45	203.87 11990	
12.00	12	102	55	40	45	203.87 12000	
12.01	12	102	55	40	45	203.87 12010	
12.02	12	102	55	40	45	203.87 12020	


Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	

Tolerances							
e.g. Ø 8 F7 = 8.02 mm							
Ø 4	3,97	U 7	X 7				
	3,98	N 10	N 11	R 7			
	3,99	M 8	N 7	N 8	N 9		
	4,00	J 7	J 8	JS 7	JS 8	JS 9	
	4,01	G 7	H 8				
	4,02	F 8	H 9				
Ø 5	4,97	U 7	X 7				
	4,98	N 10	N 11	R 7			
	4,99	M 8	N 7	N 8	N 9		
	5,00	J 7	J 8	JS 7	JS 8	JS 9	
	5,01	G 7	H 8				
	5,02	F 8	H 9				
Ø 6	5,97	U 7	X 7				
	5,98	N 10	N 11	R 7			
	5,99	M 8	N 7	N 8	N 9		
	6,00	J 7	J 8	JS 7	JS 8	JS 9	
	6,01	G 7	H 8				
	6,02	F 8	H 9				
Ø 8	7,97	S 7	U 7				
	7,98	N 8	N 10	N 11	P 7	R 7	
	7,99	K 8	M 6	M 7	M 8	N 9	
	8,00	J 7	J 8	JS 7	JS 8	JS 9	
	8,01	G 7	H 8				
	8,02	F 7	F 8	H 9			
Ø 10	9,97	S 7	U 7				
	9,98	N 8	N 10	N 11	P 7	R 7	
	9,99	K 8	M 6	M 7	M 8	N 9	
	10,00	J 7	J 8	JS 7	JS 8	JS 9	
	10,01	G 7	H 8				
	10,02	F 7	F 8	H 9			
Ø 12	11,97	N 11	R 7	S 7			
	11,98	N 8	N 9	N 10	P 7		
	11,99	K 8	M 6	M 7	M 8	N 7	
	12,00	J 7	J 8	JS 7	JS 8		
	12,01	G 6	H 7	H 8	JS 9		
	12,02	F 7					

i Tolerance classes written in standard print are not optimally positioned in the tolerance field.


WTX – Drill-Reamer -1/100

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes



Feed
BR100
DPX14S

DRAGONSKIN



$\triangleleft 140^\circ$
Solid carbide
NEW T4

DC $\pm 0,003$	DCONMS h_6	OAL	LCF	LU	LS	Article no.	
mm	mm	mm	mm	mm	mm	£	
3.97	6	74	36	29	36	163.02 03970	
3.98	6	74	36	29	36	163.02 03980	
3.99	6	74	36	29	36	163.02 03990	
4.00	6	74	36	29	36	163.02 04000	
4.01	6	74	36	29	36	163.02 04010	
4.02	6	74	36	29	36	163.02 04020	
4.97	6	82	44	35	36	163.02 04970	
4.98	6	82	44	35	36	163.02 04980	
4.99	6	82	44	35	36	163.02 04990	
5.00	6	82	44	35	36	163.02 05000	
5.01	6	82	44	35	36	163.02 05010	
5.02	6	82	44	35	36	163.02 05020	
5.97	6	82	44	35	36	163.02 05970	
5.98	6	82	44	35	36	163.02 05980	
5.99	6	82	44	35	36	163.02 05990	
6.00	6	82	44	35	36	163.02 06000	
6.01	6	82	44	35	36	163.02 06010	
6.02	6	82	44	35	36	163.02 06020	
7.97	8	91	53	43	36	163.02 07970	
7.98	8	91	53	43	36	163.02 07980	
7.99	8	91	53	43	36	163.02 07990	
8.00	8	91	53	43	36	163.02 08000	
8.01	8	91	53	43	36	163.02 08010	
8.02	8	91	53	43	36	163.02 08020	
9.97	10	103	61	49	40	223.44 09970	
9.98	10	103	61	49	40	223.44 09980	
9.99	10	103	61	49	40	223.44 09990	
10.00	10	103	61	49	40	223.44 10000	
10.01	10	103	61	49	40	223.44 10010	
10.02	10	103	61	49	40	223.44 10020	
11.97	12	118	71	56	45	314.07 11970	
11.98	12	118	71	56	45	314.07 11980	
11.99	12	118	71	56	45	314.07 11990	
12.00	12	118	71	56	45	314.07 12000	
12.01	12	118	71	56	45	314.07 12010	
12.02	12	118	71	56	45	314.07 12020	




Steel	●
Stainless steel	○
Cast iron	○
Non ferrous metals	
Heat resistant alloys	

Tolerances							
e.g. Ø 8 F7 = 8.02 mm							
Ø 4	3,97	U 7	X 7				
	3,98	N 10	N 11	R 7			
	3,99	M 8	N 7	N 8	N 9		
	4,00	J 7	J 8	JS 7	JS 8	JS 9	
	4,01	G 7	H 8				
	4,02	F 8	H 9				
	4,97	U 7	X 7				
	4,98	N 10	N 11	R 7			
	4,99	M 8	N 7	N 8	N 9		
	5,00	J 7	J 8	JS 7	JS 8	JS 9	
	5,01	G 7	H 8				
	5,02	F 8	H 9				
	5,97	U 7	X 7				
	5,98	N 10	N 11	R 7			
	5,99	M 8	N 7	N 8	N 9		
	6,00	J 7	J 8	JS 7	JS 8	JS 9	
	6,01	G 7	H 8				
	6,02	F 8	H 9				
	7,97	S 7	U 7				
	7,98	N 8	N 10	N 11	P 7	R 7	
	7,99	K 8	M 6	M 7	M 8	N 9	
	8,00	J 7	J 8	JS 7	JS 8	JS 9	
	8,01	G 7	H 8				
	8,02	F 7	F 8	H 9			
	9,97	S 7	U 7				
	9,98	N 8	N 10	N 11	P 7	R 7	
	9,99	K 8	M 6	M 7	M 8	N 9	
Ø 10	10,00	J 7	J 8	JS 7	JS 8	JS 9	
	10,01	G 7	H 8				
	10,02	F 7	F 8	H 9			
	11,97	N 11	R 7	S 7			
	11,98	N 8	N 9	N 10	P 7		
	11,99	K 8	M 6	M 7	M 8	N 7	
	12,00	J 7	J 8	JS 7	JS 8		
	12,01	G 6	H 7	H 8	JS 9		
	12,02	F 7					

i Tolerance classes written in standard print are not optimally positioned in the tolerance field.

WTX – Drill-Reamer

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming to tolerance H7 in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes
- ▲ Optimum roundness - tolerance H7

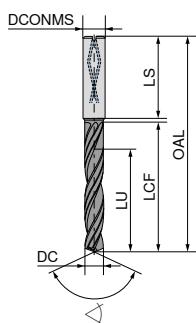

DC _{h7}	DCONMS _{h6}	OAL	LCF	LU	LS	NEW	T4	Article no.	10 711 ...	£
mm	mm	mm	mm	mm	mm					
4	6	66	24	17	36	130.72	04000			
5	6	66	28	20	36	130.72	05000			
6	6	66	28	20	36	130.72	06000			
8	8	79	41	29	36	130.72	08000			
10	10	89	47	35	40	148.77	10000			
12	12	102	55	40	45	203.87	12000			
14	14	107	60	43	45	272.65	14000			
16	16	115	65	45	48	379.05	16000			

Steel



Stainless steel



Cast iron



Non ferrous metals






Heat resistant alloys



i Special dimensions available upon request

WTX – Drill-Reamer

- ▲ Solid carbide high-performance drill-reaming tool
- ▲ Drilling and reaming to tolerance H7 in one operation
- ▲ 3 drilling edges
- ▲ 6 reaming edges
- ▲ High feeds
- ▲ Good surface quality
- ▲ For blind holes and through holes
- ▲ Optimum roundness - tolerance H7

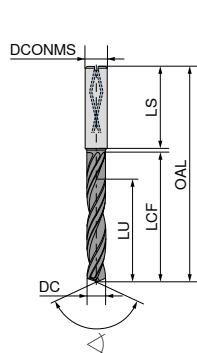

DC _{h7}	DCONMS _{h6}	OAL	LCF	LU	LS	NEW	T4	Article no.	10 719 ...	£
mm	mm	mm	mm	mm	mm					
4	6	74	36	29	36	163.02	04000			
5	6	82	44	35	36	163.02	05000			
6	6	82	44	35	36	163.02	06000			
8	8	91	53	43	36	163.02	08000			
10	10	103	61	49	40	223.44	10000			
12	12	118	71	56	45	314.07	12000			
14	14	124	77	60	45	426.08	14000			
16	16	133	83	63	48	512.62	16000			
18	18	143	93	71	48	615.51	18000			
20	20	153	101	77	50	740.15	20000			

Steel	●
Stainless steel	○
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	○

i Special dimensions available upon request



Cutting data approximate values

			v_c m/min	v_c m/min	v_c m/min	$\varnothing 4-5$	$\varnothing 5-6$	$\varnothing 6-8$	$\varnothing 8-12$	$\varnothing 12-16$	$\varnothing 16-20$	
Index	Material	Strength N/mm ² / HB / HRC	IC	AK	MMS	f (mm/U)	f (mm/U)	f (mm/U)	f (mm/U)	f (mm/U)	f (mm/U)	
P	1.1	General construction steel	< 800 N/mm ²	70	65	65	0,17	0,21	0,26	0,33	0,40	0,48
	1.2	Free cutting steel	< 800 N/mm ²	70	65	65	0,17	0,21	0,26	0,33	0,40	0,48
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	70	65	65	0,17	0,21	0,26	0,33	0,40	0,48
	1.4	Alloyed hardened steel	< 1000 N/mm ²	70	60	60	0,21	0,25	0,31	0,39	0,48	0,57
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	70	65	65	0,17	0,21	0,26	0,33	0,40	0,48
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	65	55	55	0,22	0,27	0,33	0,41	0,51	0,60
	1.7	Tempering steel, alloyed	< 800 N/mm ²	70	60	60	0,21	0,25	0,31	0,39	0,48	0,57
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	50	40	40	0,17	0,21	0,25	0,31	0,38	0,45
	1.9	Steel castings	< 850 N/mm ²	70	60	60	0,21	0,25	0,31	0,39	0,48	0,57
	1.10	Nitriding steel	< 1000 N/mm ²	70	60	60	0,21	0,25	0,31	0,39	0,48	0,57
	1.11	Nitriding steel	< 1200 N/mm ²	50	40	40	0,17	0,21	0,25	0,31	0,38	0,45
	1.12	Roller bearing steel	< 1200 N/mm ²	55	45	45	0,18	0,23	0,28	0,35	0,43	0,51
	1.13	Spring steel	< 1200 N/mm ²	40	40	40	0,16	0,19	0,23	0,29	0,35	0,42
	1.14	High-speed steel	< 1300 N/mm ²	40	40	40	0,16	0,19	0,23	0,29	0,35	0,42
	1.15	Cold working tool steel	< 1300 N/mm ²	40	40	40	0,16	0,19	0,23	0,29	0,35	0,42
	1.16	Hot working tool steel	< 1300 N/mm ²	55	45	45	0,18	0,23	0,28	0,35	0,43	0,51
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	40	25	25	0,09	0,11	0,14	0,17	0,21	0,25
	2.2	Stainless steel, ferritic	< 750 N/mm ²	40	25	25	0,09	0,11	0,14	0,17	0,21	0,25
	2.3	Stainless steel, martensitic	< 900 N/mm ²	40	25	25	0,09	0,11	0,14	0,17	0,21	0,25
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	40	25	25	0,09	0,11	0,14	0,17	0,21	0,25
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	35	20	20	0,08	0,10	0,12	0,15	0,18	0,22
	2.6	Stainless steel, austenitic	< 750 N/mm ²	40	25	25	0,09	0,11	0,14	0,17	0,21	0,25
	2.7	Heat resistant steel	< 1100 N/mm ²	35	20	20	0,08	0,10	0,12	0,15	0,18	0,22
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	100	70	70	0,25	0,32	0,41	0,53	0,66	0,80
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	85	65	65	0,22	0,27	0,34	0,43	0,53	0,63
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	135	85	100	0,25	0,31	0,39	0,50	0,62	0,74
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	85	65	65	0,22	0,27	0,34	0,43	0,53	0,63
	3.5	White malleable cast iron	270–450 N/mm ²	75	70	70	0,24	0,29	0,37	0,46	0,57	0,68
	3.6	White malleable cast iron	500–650 N/mm ²	70	60	60	0,20	0,24	0,30	0,37	0,45	0,54
	3.7	Black malleable cast iron	300–450 N/mm ²	75	70	70	0,24	0,29	0,37	0,46	0,57	0,68
	3.8	Black malleable cast iron	500–800 N/mm ²	70	60	60	0,20	0,24	0,30	0,37	0,45	0,54
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²									
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²									
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²									
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²									
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²									
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²									
	4.7	Copper wrought alloys	< 700 N/mm ²									
	4.8	Special copper alloys	< 200 HB									
	4.9	Special copper alloys	< 300 HB									
	4.10	Special copper alloys	> 300 HB									
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²									
	4.12	Long-chipping brass	< 600 N/mm ²									
	4.13	Thermoplastics										
	4.14	Duroplastics										
	4.15	Fibre-reinforced plastics										
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²									
	4.17	Graphite										
	4.18	Tungsten and tungsten alloys										
	4.19	Molybdenum and molybdenum alloys										
S	5.1	Pure nickel										
	5.2	Nickel alloys										
	5.3	Nickel alloys	< 850 N/mm ²									
	5.4	Nickel molybdenum alloys										
	5.5	Nickel-chromium alloys	< 1300 N/mm ²									
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²									
	5.7	Heat resistant alloys	< 1300 N/mm ²									
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²									
	5.9	Pure titanium	< 900 N/mm ²									
	5.10	Titanium alloys	< 700 N/mm ²									
	5.11	Titanium alloys	< 1200 N/mm ²									
H	6.1		< 45 HRC									
	6.2		46–55 HRC									
	6.3	Tempered steel	56–60 HRC									
	6.4		61–65 HRC									
	6.5		65–70 HRC									


i The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type! The values indicated represent possible cutting data which may need to be corrected depending on operating conditions!

WTX – Short 90° step drill

▲ for core hole plus countersink for thread cutting



DRAGONSKIN



HA []

140°

Solid carbide

NEW T4

DC _{m7}	DCONMS _{h6}	OAL	SDL_1	LCF	Article no.	
mm	mm	mm	mm	mm	£	
3.3	6	62	11.4	24	66.32	03300
4.2	6	66	13.6	28	69.71	04200
5.0	8	79	16.5	34	88.44	05000
6.8	10	89	21.0	47	143.52	06800
8.5	12	102	25.5	55	177.10	08500
10.2	14	107	30.0	60	248.40	10200
12.0	16	115	34.5	65	301.65	12000
14.0	18	123	38.5	73	311.88	14000

Steel



Stainless steel

Cast iron



Non ferrous metals

Heat resistant alloys

Cutting data approximate values

Index	Material	Strength N/mm ² / HB / HRC	v _c m/min	v _c m/min	Ø 2-5	Ø 5-8	Ø 8-12	Ø 12-16
			without through coolant	with through coolant	f (mm/U)	f (mm/U)	f (mm/U)	f (mm/U)
P	1.1 General construction steel	< 800 N/mm ²	100	115	0,11	0,15	0,20	0,24
	1.2 Free cutting steel	< 800 N/mm ²	120	138	0,19	0,25	0,32	0,38
	1.3 Hardened steel, non alloyed	< 800 N/mm ²	100	115	0,14	0,20	0,25	0,30
	1.4 Alloyed hardened steel	< 1000 N/mm ²	80	92	0,12	0,17	0,22	0,27
	1.5 Tempering steel, unalloyed	< 850 N/mm ²	90	104	0,14	0,20	0,25	0,30
	1.6 Tempering steel, unalloyed	< 1000 N/mm ²	80	92	0,12	0,17	0,22	0,27
	1.7 Tempering steel, alloyed	< 800 N/mm ²	80	92	0,12	0,17	0,22	0,27
	1.8 Tempering steel, alloyed	< 1300 N/mm ²	60	69	0,10	0,14	0,18	0,22
	1.9 Steel castings	< 850 N/mm ²	90	104	0,14	0,20	0,25	0,30
	1.10 Nitriding steel	< 1000 N/mm ²	60	69	0,10	0,14	0,18	0,22
	1.11 Nitriding steel	< 1200 N/mm ²	50	58	0,09	0,12	0,16	0,19
	1.12 Roller bearing steel	< 1200 N/mm ²	60	69	0,10	0,14	0,18	0,22
	1.13 Spring steel	< 1200 N/mm ²	60	69	0,10	0,14	0,18	0,22
	1.14 High-speed steel	< 1300 N/mm ²	50	58	0,09	0,12	0,16	0,19
	1.15 Cold working tool steel	< 1300 N/mm ²	50	58	0,10	0,14	0,18	0,22
	1.16 Hot working tool steel	< 1300 N/mm ²	50	58	0,10	0,14	0,18	0,22
M	2.1 Cast steel and sulphured stainless steel	< 850 N/mm ²						
	2.2 Stainless steel, ferritic	< 750 N/mm ²						
	2.3 Stainless steel, martensitic	< 900 N/mm ²						
	2.4 Stainless steel, ferritic / martensitic	< 1100 N/mm ²						
	2.5 Stainless steel, austenitic / ferritic	< 850 N/mm ²						
	2.6 Stainless steel, austenitic	< 750 N/mm ²						
	2.7 Heat resistant steel	< 1100 N/mm ²						
K	3.1 Grey cast iron with lamellar graphite	100–350 N/mm ²	70	84	0,17	0,22	0,28	0,34
	3.2 Grey cast iron with lamellar graphite	300–500 N/mm ²	50	60	0,14	0,20	0,25	0,30
	3.3 Gray cast iron with spheroidal graphite	300–500 N/mm ²	60	72	0,19	0,25	0,32	0,38
	3.4 Gray cast iron with spheroidal graphite	500–900 N/mm ²	45	54	0,14	0,20	0,25	0,30
	3.5 White malleable cast iron	270–450 N/mm ²	90	108	0,21	0,28	0,35	0,42
	3.6 White malleable cast iron	500–650 N/mm ²	75	90	0,19	0,25	0,32	0,38
	3.7 Black malleable cast iron	300–450 N/mm ²	90	108	0,19	0,25	0,32	0,38
	3.8 Black malleable cast iron	500–800 N/mm ²	75	90	0,14	0,20	0,25	0,30
N	4.1 Aluminium (non alloyed, low alloyed)	< 350 N/mm ²						
	4.2 Aluminium alloys < 0,5 % Si	< 500 N/mm ²						
	4.3 Aluminium alloy 0,5–10 % Si	< 400 N/mm ²						
	4.4 Aluminium alloys 10–15 % Si	< 400 N/mm ²						
	4.5 Aluminum alloys > 15 % Si	< 400 N/mm ²						
	4.6 Copper (non alloyed, low alloyed)	< 350 N/mm ²						
	4.7 Copper wrought alloys	< 700 N/mm ²						
	4.8 Special copper alloys	< 200 HB						
	4.9 Special copper alloys	< 300 HB						
	4.10 Special copper alloys	> 300 HB						
	4.11 Short-chipping brass, bronze, red bronze	< 600 N/mm ²	120		0,17	0,22	0,28	0,34
	4.12 Long-chipping brass	< 600 N/mm ²	120		0,14	0,20	0,25	0,30
S	4.13 Thermoplastics							
	4.14 Duroplastics							
	4.15 Fibre-reinforced plastics							
	4.16 Magnesium and magnesium alloys	< 850 N/mm ²						
	4.17 Graphite		240		0,11	0,15	0,20	0,24
	4.18 Tungsten and tungsten alloys							
	4.19 Molybdenum and molybdenum alloys							
	5.1 Pure nickel							
	5.2 Nickel alloys							
	5.3 Nickel alloys	< 850 N/mm ²						
H	5.4 Nickel molybdenum alloys							
	5.5 Nickel-chromium alloys	< 1300 N/mm ²						
	5.6 Cobalt Chrome Alloys	< 1300 N/mm ²						
	5.7 Heat resistant alloys	< 1300 N/mm ²						
	5.8 Nickel-cobalt-chromium alloys	< 1400 N/mm ²						
	5.9 Pure titanium	< 900 N/mm ²						
	5.10 Titanium alloys	< 700 N/mm ²						
	5.11 Titanium alloys	< 1200 N/mm ²						
	6.1	< 45 HRC						
	6.2	46–55 HRC						
	6.3	Tempered steel	56–60 HRC					
	6.4		61–65 HRC					
	6.5		65–70 HRC					

i The cutting data is highly dependent on external conditions, such as stability of the tool and workpiece clamping, material and machine type! The values indicated represent possible cutting data which may need to be corrected depending on operating conditions!

Toolfinder

● = Main Application
 ○ = Extended application
 - = Not possible

Boring depth		Drilling through a transverse hole		Stack plate drilling		Drilling on uneven surfaces		Boring		Spot drilling an edge		Spot drilling a convex surface		Spot drilling angled surfaces		Spot drilling a pointed contour		Chain drilling		Spot drilling through a centre in the pre-op	
--------------	--	------------------------------------	--	----------------------	--	-----------------------------	--	--------	--	-----------------------	--	--------------------------------	--	-------------------------------	--	---------------------------------	--	----------------	--	--	--


KUB Pentron cartridge drill



The final piece in the product portfolio

- ▲ Process-secure, reliable, modular system for creating large holes with a diameter of up to 96.00 mm
- ▲ Consists of a base body, an internal cartridge and an external cartridge
- ▲ Universal application, powerful, specialised
- ▲ A certain diameter range can be covered with a holder and a suitable internal cartridge

3xD	●	○	●	-	●	●	●	●	●	●	●
-----	---	---	---	---	---	---	---	---	---	---	---




KUB Pentron



The specialist for large hole depths

- ▲ The all-rounder for process-secure drilling under a wide variety of conditions
- ▲ Ideal for extreme machining situations

2xD	●	●	●	○	●	●	●	●	●	●
3xD	●	●	●	○	●	●	●	●	●	●
4xD	●	○	○	-	●	●	●	●	○	●
5xD	●	○	○	-	●	○	●	○	-	○
3xD	●	●	●	○	●	●	●	●	●	●
2xD	●	●	●	○	●	●	●	●	●	●
3xD	●	●	●	○	●	●	●	●	●	●
4xD	●	○	○	-	●	●	●	●	○	●
5xD	●	○	○	-	●	○	●	○	-	○



Overview of the entire KUB Pentron family

KUB Pentron CS




Shank ABS
Diameter 64–96
Lengths 3xD
Inserts SOGX



KUB Pentron

Shank ABS
Diameter 14–65
Lengths 2xD, 3xD, 4xD, 5xD
Inserts SOGX




Shank	NEW	Page No.
ABS	Ø 64-96	32-34

Insert type	No. of cutting edges	Grade	Page No.
	SOGX	4	-01 BK8425
	SOGX	4	-03 BK8430
	SOGX	4	-01 BK7935
	SOGX	4	-01 BK6115
	SOGX	4	-01 BK6425
	SOGX	4	-01 BK7710

Shank	Diameter	NEW	Page No.
ABS	Ø 14-46	Ø 47-65	35
ABS	Ø 30,5-46	Ø 47-65	36
ABS	Ø 30,5-46		Main catalogue
ABS	Ø 30,5-46		+ UP2DATE May
PSC	Ø 14-30	Ø 30,5-37	37
C	Ø 30,5-45,5		Main catalogue
C	Ø 30,5-45,5		+ UP2DATE May
C	Ø 30,5-45,5		+ UP2DATE May
C	Ø 30,5-45,5		+ UP2DATE May

38+39

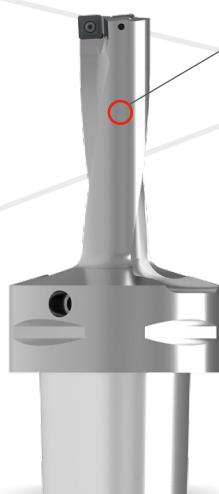

KUB Pentron

Shank PSC
Diameter 14-37
Lengths 3xD
Inserts SOGX



KUB Pentron


Shank C
Diameter 14-46
Lengths 2xD, 3xD, 4xD, 5xD
Inserts SOGX

KUB Pentron CS – basic element

- ▲ SZID = nominal size
- ▲ Tightening torque refers to the fixing screw

Scope of supply:

Cartridge drill incl. fixing screws

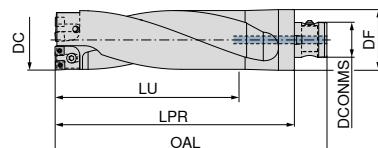
ABS


Designation	KOMET no.	DC	DF	OAL	DCONMS	LU	LPR	SZID	torque moment Nm	NEW 2B/6#	Article no. 10 876 ... £
		mm	mm	mm	mm	mm	mm	mm			
KUB-P.GH-CS.1.3D.64-66.ABS80	U60 46400	64 - 66	80	271	46	198	241	1	17,29	892.73	64092
KUB-P.GH-CS.1.3D.67-69.ABS80	U60 46700	67 - 69	80	280	46	207	250	1	17,29	901.82	67092
KUB-P.GH-CS.2.3D.70-72.ABS80	U60 47000	70 - 72	80	289	46	216	259	2	17,29	910.91	70092
KUB-P.GH-CS.2.3D.73-75.ABS80	U60 47300	73 - 75	80	298	46	225	268	2	17,29	920.00	73092
KUB-P.GH-CS.3.3D.76-78.ABS80	U60 47600	76 - 78	80	307	46	234	277	3	42,07	929.09	76092
KUB-P.GH-CS.3.3D.79-81.ABS80	U60 47900	79 - 81	80	316	46	243	286	3	42,07	938.18	79092
KUB-P.GH-CS.3.3D.82-84.ABS80	U60 48200	82 - 84	80	325	46	252	295	3	42,07	947.27	82092
KUB-P.GH-CS.4.3D.85-87.ABS100	U60 58500	85 - 87	100	342	56	261	316	4	42,07	966.36	85091
KUB-P.GH-CS.4.3D.88-90.ABS100	U60 58800	88 - 90	100	351	56	270	325	4	42,07	985.45	88091
KUB-P.GH-CS.4.3D.91-93.ABS100	U60 59100	91 - 93	100	360	56	279	334	4	42,07	1,003.64	91091
KUB-P.GH-CS.4.3D.94-96.ABS100	U60 59400	94 - 96	100	369	56	288	343	4	42,07	1,021.82	94091

W7



Fixing screw


Spare parts DC	Article no. 10 950 ... £
64 - 66	0.76 16700
67 - 69	0.76 16700
70 - 72	0.76 16700
73 - 75	0.76 16700
76 - 78	0.81 16800
79 - 81	0.81 16800
82 - 84	0.81 16800
85 - 87	0.81 16900
88 - 90	0.81 16900
91 - 93	0.81 16900
94 - 96	0.81 16900

i The internal cartridge and the place where the internal cartridge sits in the base body are marked with a dot to prevent the internal and external cartridges from being incorrectly installed.

KUB Pentron CS – internal cartridge

Scope of supply:

Internal cartridge incl. clamping screws




DC mm	KOMET no.	OAL mm	SZID	HF mm	Insert	NEW	2B/6#	
						Article no. 10 877 ...	£	16400
64 - 69	D60 06400	27.43	1	9	SOGX 100408	167.27		
70 - 75	D60 07000	29.41	2	10	SOGX 110408	167.27		27000
76 - 84	D60 07600	32.25	3	11	SOGX 120408	167.27		37600
85 - 96	D60 08500	35.34	4	12	SOGX 130508	167.27		48500

i The internal cartridge and the place where the internal cartridge sits in the base body are marked with a dot to prevent the internal and external cartridges from being incorrectly installed.

KUB Pentron CS – external cartridge

Scope of supply:

External cartridge incl. clamping screws



DC	KOMET no.	OAL mm	SZID	HF mm	Insert	NEW 2B/6#		
						torque moment Nm	Article no.	£
64	D60 16400	27.23	1	9	SOGX 100408	2,8	16400	225.82
65	D60 16500	27.23	1	9	SOGX 100408	2,8	16500	225.82
66	D60 16600	27.23	1	9	SOGX 100408	2,8	16600	225.82
67	D60 16700	27.23	1	9	SOGX 100408	2,8	16700	225.82
68	D60 16800	27.23	1	9	SOGX 100408	2,8	16800	225.82
69	D60 16900	27.23	1	9	SOGX 100408	2,8	16900	225.82
70	D60 17000	29.22	2	10	SOGX 110408	2,8	27000	225.82
71	D60 17100	29.22	2	10	SOGX 110408	2,8	27100	225.82
72	D60 17200	29.22	2	10	SOGX 110408	2,8	27200	225.82
73	D60 17300	29.22	2	10	SOGX 110408	2,8	27300	225.82
74	D60 17400	29.22	2	10	SOGX 110408	2,8	27400	225.82
75	D60 17500	29.22	2	10	SOGX 110408	2,8	27500	225.82
76	D60 17600	32.07	3	11	SOGX 120408	6,25	37600	225.82
77	D60 17700	32.07	3	11	SOGX 120408	6,25	37700	225.82
78	D60 17800	32.07	3	11	SOGX 120408	6,25	37800	225.82
79	D60 17900	32.07	3	11	SOGX 120408	6,25	37900	225.82
80	D60 18000	32.07	3	11	SOGX 120408	6,25	38000	225.82
81	D60 18100	32.07	3	11	SOGX 120408	6,25	38100	225.82
82	D60 18200	32.07	3	11	SOGX 120408	6,25	38200	225.82
83	D60 18300	32.07	3	11	SOGX 120408	6,25	38300	225.82
84	D60 18400	32.07	3	11	SOGX 120408	6,25	38400	225.82
85	D60 18500	35.14	4	12	SOGX 130508	6,25	48500	225.82
86	D60 18600	35.14	4	12	SOGX 130508	6,25	48600	225.82
87	D60 18700	35.14	4	12	SOGX 130508	6,25	48700	225.82
88	D60 18800	35.14	4	12	SOGX 130508	6,25	48800	225.82
89	D60 18900	35.14	4	12	SOGX 130508	6,25	48900	225.82
90	D60 19000	35.14	4	12	SOGX 130508	6,25	49000	225.82
91	D60 19100	35.14	4	12	SOGX 130508	6,25	49100	225.82
92	D60 19200	35.14	4	12	SOGX 130508	6,25	49200	225.82
93	D60 19300	35.14	4	12	SOGX 130508	6,25	49300	225.82
94	D60 19400	35.14	4	12	SOGX 130508	6,25	49400	225.82
95	D60 19500	35.14	4	12	SOGX 130508	6,25	49500	225.82
96	D60 19600	35.14	4	12	SOGX 130508	6,25	49600	225.82



Key D

Article no.

80 950 ...

£



Clamping screw

Article no.

10 950 ...


£

DC	Article no.	£	Article no.	£
64 - 75	15.77	128	2.15	10300
76 - 96	16.56	129	2.15	10400

KUB Pentron

Scope of supply:

Indexable Insert Drill incl. clamping screws

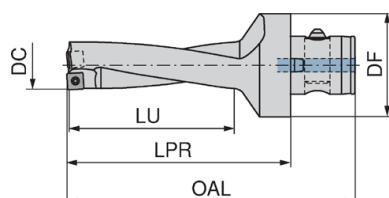
ABS


Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	NEW 2B/6#	
									Article no. 10 872 ... £	
KUB-P.2D.470.R.08-ABS63	U42 64700	47	63	187	101	149	1,28	SOGX 080308	538.64	47096
KUB-P.2D.480.R.08-ABS63	U42 64800	48	63	189	105	151	1,28	SOGX 080308	538.64	48096
KUB-P.2D.490.R.08-ABS63	U42 64900	49	63	191	109	153	1,28	SOGX 080308	538.64	49096
KUB-P.2D.500.R.08-ABS63	U42 65000	50	63	193	113	155	1,28	SOGX 080308	538.64	50096
KUB-P.2D.510.R.08-ABS63	U42 65100	51	63	195	117	157	1,28	SOGX 080308	538.64	51096
KUB-P.2D.520.R.08-ABS63	U42 65200	52	63	197	121	159	1,28	SOGX 080308	538.64	52096
KUB-P.2D.530.R.10-ABS63	U42 65300	53	63	199	125	161	2,8	SOGX 100408	538.64	53096
KUB-P.2D.540.R.10-ABS63	U42 65400	54	63	201	129	163	2,8	SOGX 100408	538.64	54096
KUB-P.2D.550.R.10-ABS80	U42 75500	55	80	208	115	165	2,8	SOGX 100408	650.27	55098
KUB-P.2D.560.R.10-ABS80	U42 75600	56	80	210	117	167	2,8	SOGX 100408	650.27	56098
KUB-P.2D.570.R.10-ABS80	U42 75700	57	80	212	120	169	2,8	SOGX 100408	650.27	57098
KUB-P.2D.580.R.10-ABS80	U42 75800	58	80	214	124	171	2,8	SOGX 100408	650.27	58098
KUB-P.2D.590.R.10-ABS80	U42 75900	59	80	216	127	173	2,8	SOGX 100408	650.27	59098
KUB-P.2D.600.R.10-ABS80	U42 76000	60	80	218	125	175	2,8	SOGX 100408	650.27	60098
KUB-P.2D.610.R.10-ABS80	U42 76100	61	80	220	128	177	2,8	SOGX 100408	650.27	61098
KUB-P.2D.620.R.10-ABS80	U42 76200	62	80	222	132	179	2,8	SOGX 100408	650.27	62098
KUB-P.2D.630.R.10-ABS80	U42 76300	63	80	224	131	181	2,8	SOGX 100408	650.27	63098
KUB-P.2D.640.R.10-ABS80	U42 76400	64	80	226	135	183	2,8	SOGX 100408	650.27	64098
KUB-P.2D.650.R.10-ABS80	U42 76500	65	80	228	139	185	2,8	SOGX 100408	650.27	65098


Y7	W7
Key D	Clamping screw
Article no. 80 950 ... £	Article no. 10 950 ... £
13.49 125	2.15 10800

DC	Article no. 80 950 ... £	Article no. 10 950 ... £
47 - 52	13.49	125
53 - 65	13.49	125

KUB Pentron

Scope of supply:

Indexable Insert Drill incl. clamping screws

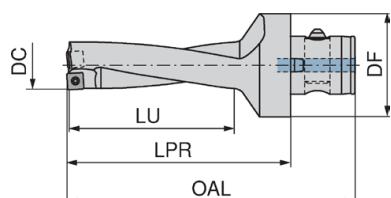
ABS


Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	NEW 2B/6#	
									Article no. 10 873 ... £	
KUB-P.3D.470.R.08-ABS63	U43 64700	47	63	234	148	196	1,28	SOGX 080308	602.55	47096
KUB-P.3D.480.R.08-ABS63	U43 64800	48	63	237	153	199	1,28	SOGX 080308	602.55	48096
KUB-P.3D.490.R.08-ABS63	U43 64900	49	63	240	158	202	1,28	SOGX 080308	602.55	49096
KUB-P.3D.500.R.08-ABS63	U43 65000	50	63	243	163	205	1,28	SOGX 080308	602.55	50096
KUB-P.3D.510.R.08-ABS63	U43 65100	51	63	246	168	205	1,28	SOGX 080308	602.55	51096
KUB-P.3D.520.R.08-ABS63	U43 65200	52	63	249	173	211	1,28	SOGX 080308	602.55	52096
KUB-P.3D.530.R.10-ABS63	U43 65300	53	63	252	178	214	2,8	SOGX 100408	602.55	53096
KUB-P.3D.540.R.10-ABS63	U43 65400	54	63	255	182	217	2,8	SOGX 100408	602.55	54096
KUB-P.3D.550.R.10-ABS63	U43 75500	55	80	263	170	220	2,8	SOGX 100408	725.18	55098
KUB-P.3D.560.R.10-ABS63	U43 75600	56	80	266	173	223	2,8	SOGX 100408	725.18	56098
KUB-P.3D.570.R.10-ABS63	U43 75700	57	80	269	177	226	2,8	SOGX 100408	725.18	57098
KUB-P.3D.580.R.10-ABS63	U43 75800	58	80	272	182	229	2,8	SOGX 100408	725.18	58098
KUB-P.3D.590.R.10-ABS63	U43 75900	59	80	275	186	232	2,8	SOGX 100408	725.18	59098
KUB-P.3D.600.R.10-ABS63	U43 76000	60	80	278	185	235	2,8	SOGX 100408	725.18	60098
KUB-P.3D.610.R.10-ABS63	U43 76100	61	80	281	189	238	2,8	SOGX 100408	725.18	61098
KUB-P.3D.620.R.10-ABS63	U43 76200	62	80	284	194	241	2,8	SOGX 100408	725.18	62098
KUB-P.3D.630.R.10-ABS63	U43 76300	63	80	287	194	244	2,8	SOGX 100408	725.18	63098
KUB-P.3D.640.R.10-ABS63	U43 76400	64	80	290	199	247	2,8	SOGX 100408	725.18	64098
KUB-P.3D.650.R.10-ABS63	U43 76500	65	80	293	204	250	2,8	SOGX 100408	725.18	65098


 Key D	 Clamping screw
Article no. 80 950 ... £	Article no. 10 950 ... £

DC	47 - 52	53 - 65	Article no. 80 950 ... £	13.49	125	2.15	10800
				13.49	125	2.15	10300

KUB Pentron

Scope of supply:

Indexable Insert Drill incl. clamping screws

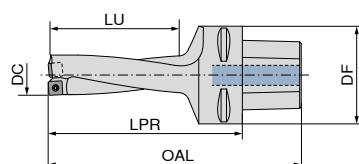
PSC


Designation	KOMET no.	DC mm	DF mm	OAL mm	LU mm	LPR mm	torque moment Nm	Insert	NEW	2B/6#
									Article no. 10 873 ...	£
KUB-P.3D.305.R.10-PSC50	U40 63050	30.5	50	165	98	135	2,8	SOGX 100408	532.95	30555
KUB-P.3D.305.R.10-PSC63	U40 73050	30.5	63	177	98	139	2,8	SOGX 100408	532.95	30556
KUB-P.3D.310.R.10-PSC50	U40 63100	31.0	50	165	98	135	2,8	SOGX 100408	532.95	31055
KUB-P.3D.310.R.10-PSC63	U40 73100	31.0	63	177	98	139	2,8	SOGX 100408	532.95	31056
KUB-P.3D.315.R.10-PSC63	U40 73150	31.5	63	180	101	142	2,8	SOGX 100408	533.52	31556
KUB-P.3D.315.R.10-PSC50	U40 63150	31.5	50	168	101	138	2,8	SOGX 100408	533.52	31555
KUB-P.3D.320.R.10-PSC50	U40 63200	32.0	50	168	101	138	2,8	SOGX 100408	533.52	32055
KUB-P.3D.320.R.10-PSC63	U40 73200	32.0	63	180	101	142	2,8	SOGX 100408	533.52	32056
KUB-P.3D.325.R.10-PSC50	U40 63250	32.5	50	172	104	142	2,8	SOGX 100408	537.33	32555
KUB-P.3D.325.R.10-PSC63	U40 73250	32.5	63	184	104	146	2,8	SOGX 100408	537.33	32556
KUB-P.3D.330.R.10-PSC50	U40 63300	33.0	50	172	104	142	2,8	SOGX 100408	537.33	33055
KUB-P.3D.330.R.10-PSC63	U40 73300	33.0	63	184	104	146	2,8	SOGX 100408	537.33	33056
KUB-P.3D.335.R.11-PSC50	U40 63350	33.5	50	175	107	145	2,8	SOGX 110408	538.19	33555
KUB-P.3D.335.R.11-PSC63	U40 73350	33.5	63	187	107	149	2,8	SOGX 110408	538.19	33556
KUB-P.3D.340.R.11-PSC50	U40 63400	34.0	50	175	107	145	2,8	SOGX 110408	538.19	34055
KUB-P.3D.340.R.11-PSC63	U40 73400	34.0	63	187	107	149	2,8	SOGX 110408	538.19	34056
KUB-P.3D.345.R.11-PSC50	U40 63450	34.5	50	179	110	149	2,8	SOGX 110408	538.95	34555
KUB-P.3D.345.R.11-PSC63	U40 73450	34.5	63	191	110	153	2,8	SOGX 110408	538.95	34556
KUB-P.3D.350.R.11-PSC50	U40 63500	35.0	50	179	110	149	2,8	SOGX 110408	538.95	35055
KUB-P.3D.350.R.11-PSC63	U40 73500	35.0	63	191	110	153	2,8	SOGX 110408	538.95	35056
KUB-P.3D.355.R.11-PSC50	U40 63550	35.5	50	182	113	152	2,8	SOGX 110408	540.10	35555
KUB-P.3D.355.R.11-PSC63	U40 73550	35.5	63	194	113	156	2,8	SOGX 110408	540.10	35556
KUB-P.3D.360.R.11-PSC50	U40 63600	36.0	50	182	113	152	2,8	SOGX 110408	540.10	36055
KUB-P.3D.360.R.11-PSC63	U40 73600	36.0	63	194	113	156	2,8	SOGX 110408	540.10	36056
KUB-P.3D.365.R.11-PSC50	U40 63650	36.5	50	186	116	156	2,8	SOGX 110408	544.29	36555
KUB-P.3D.365.R.11-PSC63	U40 73650	36.5	63	198	116	160	2,8	SOGX 110408	544.29	36556
KUB-P.3D.370.R.11-PSC50	U40 63700	37.0	50	186	116	156	2,8	SOGX 110408	544.29	37055
KUB-P.3D.370.R.11-PSC63	U40 73700	37.0	63	198	116	160	2,8	SOGX 110408	544.29	37056


 Article no.
80 950 ...

£

 Article no.
10 950 ...

£

15.77

128

2.15



10300

DC

30.5 - 37

SOGX

Designation	L	IC	D1	S
	mm	mm	mm	mm
SOGX 0402..	4.8	4.8	2.05	2.20
SOGX 0502..	5.5	5.5	2.30	2.40
SOGX 0602..	6.2	6.2	2.60	2.75
SOGX 07T2..	7.1	7.1	2.60	2.97
SOGX 0803..	8.0	8.0	2.85	3.40
SOGX 09T3..	8.9	8.9	3.40	3.90
SOGX 1004..	9.8	9.8	4.10	4.20
SOGX 1104..	10.9	10.9	4.10	4.50
SOGX 1204..	12.0	12.0	5.20	4.80
SOGX 1305..	13.2	13.2	5.20	5.20

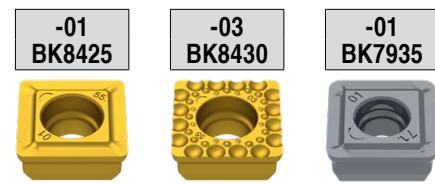**SOGX**


ISO	KOMET no.	RE mm	SOGX NEW 1A/3# Article no. 10 820 ... £			SOGX NEW 1A/3# Article no. 10 820 ... £			SOGX NEW 1A/3# Article no. 10 820 ... £			
			30401	30501	30601	30701	30801	30901	31001	31101	31201	31301
040204	W80 10030.048430	0.4				14.65			14.65	00403		
040204	W80 10010.048425	0.4				14.65	30401				14.66	50401
040204	W80 10010.047935	0.4									14.75	00503
050204	W80 12030.048430	0.4				14.75	30501				14.85	00603
050204	W80 12010.048425	0.4									14.94	00703
050204	W80 12010.047935	0.4									14.94	00703
060206	W80 18030.068430	0.6				14.85	30601				14.85	00603
060206	W80 18010.068425	0.6									14.85	00603
060206	W80 18010.067935	0.6									14.87	50601
07T208	W80 20030.088430	0.8									14.94	00703
07T208	W80 20010.088425	0.8				14.94	30701				14.94	00703
07T208	W80 20010.087935	0.8									15.04	00803
080308	W80 24030.088430	0.8									15.04	00803
080308	W80 24010.088425	0.8				15.04	30801				15.04	00803
080308	W80 24010.087935	0.8									15.03	50801
09T308	W80 28030.088430	0.8									15.60	00903
09T308	W80 28010.088425	0.8				15.60	30901				15.60	00903
09T308	W80 28010.087935	0.8									15.59	50901
100408	W80 32030.088430	0.8									16.07	01003
100408	W80 32010.088425	0.8				16.07	31001				16.07	01003
100408	W80 32010.087935	0.8									16.55	01103
110408	W80 38030.088430	0.8									16.55	01103
110408	W80 38010.088425	0.8				16.55	31101				16.55	01203
110408	W80 38010.087935	0.8									17.40	01203
120408	W80 42030.088430	0.8									20.24	01303
120408	W80 42010.088425	0.8				17.40	31201				20.24	01303
120408	W80 42010.087935	0.8									20.29	51301
130508	W80 46030.088430	0.8										
130508	W80 46010.088425	0.8										
130508	W80 46010.087935	0.8										

Material compatibility legend:

- Steel: ●
- Stainless steel: ●
- Cast iron: ●
- Non ferrous metals: ○
- Heat resistant alloys: ○
- Hardened materials: ●

SOGX

Designation	L	IC	D1	S
	mm	mm	mm	mm
SOGX 0402..	4.8	4.8	2.05	2.20
SOGX 0502..	5.5	5.5	2.30	2.40
SOGX 0602..	6.2	6.2	2.60	2.75
SOGX 07T2..	7.1	7.1	2.60	2.97
SOGX 0803..	8.0	8.0	2.85	3.40
SOGX 09T3..	8.9	8.9	3.40	3.90
SOGX 1004..	9.8	9.8	4.10	4.20
SOGX 1104..	10.9	10.9	4.10	4.50
SOGX 1204..	12.0	12.0	5.20	4.80
SOGX 1305..	13.2	13.2	5.20	5.20

**SOGX**

ISO	KOMET no.	RE mm	SOGX NEW 1A/3# Article no. 10 820 ... £			SOGX NEW 1A/3# Article no. 10 820 ... £			SOGX NEW 1A/3# Article no. 10 820 ... £		
			40401	40501	40601	40701	40801	40901	41001	41101	41301
040204	W80 10010.046425	0.4				14.65			14.66	60401	
040204	W80 10010.046115	0.4							14.66	90401	
040204	W80 10010.047710	0.4							14.76	60501	
050204	W80 12010.046425	0.4				14.75	40501		14.87	60601	
050204	W80 12010.046115	0.4							14.87	90501	
060206	W80 18010.066425	0.6				14.85	40601		14.97	60701	
060206	W80 18010.066115	0.6							14.97	90601	
060206	W80 18010.067710	0.6							14.97	90701	
07T208	W80 20010.086425	0.8				14.94	40701		15.03	60801	
07T208	W80 20010.086115	0.8							15.03	90801	
080308	W80 24010.086425	0.8				15.04	40801		15.59	60901	
080308	W80 24010.086115	0.8							15.59	90901	
080308	W80 24010.087710	0.8							15.59	91001	
09T308	W80 28010.086425	0.8				15.60	40901		16.10	61001	
09T308	W80 28010.086115	0.8							16.10	91001	
09T308	W80 28010.087710	0.8							16.10	91001	
100408	W80 32010.086425	0.8				16.07	41001		16.55	61101	
100408	W80 32010.086115	0.8							16.55	91101	
110408	W80 38010.086425	0.8				16.55	41101		17.38	61201	
110408	W80 38010.086115	0.8							17.38	91201	
110408	W80 38010.087710	0.8							20.29	61301	
120408	W80 42010.086425	0.8							20.29	91301	
120408	W80 42010.086115	0.8									
120408	W80 42010.087710	0.8									
130508	W80 46010.086425	0.8									
130508	W80 46010.086115	0.8									
130508	W80 46010.087710	0.8									

Steel	●	●
Stainless steel		
Cast iron	●	○
Non ferrous metals		●
Heat resistant alloys		○
Hardened materials	○	

i BK6115-01 is exclusively recommended for use on the peripheral cutting edge!

Cutting data standard values

	Index	Material	Strength N/mm ² / HB / HRC	SOGX indexable inserts					
				BK8425	BK8430	BK7935	BK6115	BK6425	BK7710
				V _c m/min					
P	1.1	General construction steel	< 800 N/mm ²	200–230	200–300	200–300	250–350	270–370	
	1.2	Free cutting steel	< 800 N/mm ²	200–320	200–320	200–300	250–350	270–370	
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	250–300	250–300	250–300	250–300	250–320	
	1.4	Alloyed hardened steel	< 1000 N/mm ²	250–300	250–300	250–300	250–300	250–320	
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	250–300	250–300	250–300	250–300	250–320	
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.7	Tempering steel, alloyed	< 800 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.9	Steel castings	< 850 N/mm ²	250–300	250–300	250–300	250–300	250–320	
	1.10	Nitriding steel	< 1000 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.11	Nitriding steel	< 1200 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.12	Roller bearing steel	< 1200 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.13	Spring steel	< 1200 N/mm ²	140–220	140–220	120–200	200–280	220–300	
	1.14	High-speed steel	< 1300 N/mm ²	140–220	140–220	120–200	70–110	220–300	
	1.15	Cold working tool steel	< 1300 N/mm ²	120–200	120–200	100–180	170–230	190–250	
	1.16	Hot working tool steel	< 1300 N/mm ²	120–200	120–200	100–180	170–230	190–250	
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	150–210	150–210	140–220		190–250	
	2.2	Stainless steel, ferritic	< 750 N/mm ²	150–210	150–210	140–220		190–250	
	2.3	Stainless steel, martensitic	< 900 N/mm ²	150–210	150–210	140–220		190–250	
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	120–200	120–200	120–200		170–230	
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	110–190	110–190	120–200		170–230	
	2.6	Stainless steel, austenitic	< 750 N/mm ²	120–200	120–200	120–200		170–230	
	2.7	Heat resistant steel	< 1100 N/mm ²	110–190	110–190	120–200		170–230	
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	120–200	140–220	110–190	160–320	150–250	
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	90–150	140–220	110–190	160–320	150–250	
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	120–200	140–220	110–190	120–200	120–200	
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	110–170	120–180	80–140	100–180	90–150	
	3.5	White malleable cast iron	270–450 N/mm ²	90–150	110–170	80–140	90–150	90–150	
	3.6	White malleable cast iron	500–650 N/mm ²	90–150	110–170	80–140	90–150	90–150	
	3.7	Black malleable cast iron	300–450 N/mm ²	90–150	110–170	80–140	90–150	90–150	
	3.8	Black malleable cast iron	500–800 N/mm ²	90–150	110–170	80–140	90–150	90–150	
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²			300–500			
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²	200–400		300–500		250–450	
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²	300–500		180–320		300–700	
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²	180–320		150–250		210–350	
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²	150–250		150–250		140–300	
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²			200–400			
	4.7	Copper wrought alloys	< 700 N/mm ²	150–250		200–400		150–350	
	4.8	Special copper alloys	< 200 HB	150–250		200–400		150–350	
	4.9	Special copper alloys	< 300 HB	200–400		200–400		250–450	
	4.10	Special copper alloys	> 300 HB			200–400			
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²	200–400		200–400		250–450	
	4.12	Long-chipping brass	< 600 N/mm ²	200–400		200–400		250–450	
S	4.13	Thermoplastics							
	4.14	Duroplastics							
	4.15	Fibre-reinforced plastics							
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²						
	4.17	Graphite							
	4.18	Tungsten and tungsten alloys							
	4.19	Molybdenum and molybdenum alloys							
	5.1	Pure nickel				20–80			
	5.2	Nickel alloys				20–80			
	5.3	Nickel alloys	< 850 N/mm ²			20–80			
H	5.4	Nickel molybdenum alloys				20–80			
	5.5	Nickel-chromium alloys	< 1300 N/mm ²			20–80			
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²			20–80			
	5.7	Heat resistant alloys	< 1300 N/mm ²			20–80			
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²			20–80			
	5.9	Pure titanium	< 900 N/mm ²			40–100			
	5.10	Titanium alloys	< 700 N/mm ²			40–80			
	5.11	Titanium alloys	< 1200 N/mm ²			40–80			
	6.1		< 45 HRC	80–140			50–90		
	6.2		46–55 HRC	60–140			30–50		
	6.3	Tempered steel	56–60 HRC	60–140					
	6.4		61–65 HRC						
	6.5		65–70 HRC						



During the drilling operation on through holes a sharp disk will be produced. Safety precautions must be observed.
A safety guard has to be provided as protection.


KUB Pentron cartridge drill			
ABS			
Ø 64–69 mm	Ø 70–75 mm	Ø 76–84 mm	Ø 85–96 mm
f in mm/rev.			
0,06–0,12	0,06–0,12	0,06–0,12	0,06–0,12
0,06–0,12	0,06–0,12	0,06–0,12	0,06–0,12
0,11–0,16	0,11–0,16	0,11–0,16	0,11–0,16
0,11–0,16	0,11–0,16	0,11–0,16	0,11–0,16
0,11–0,16	0,11–0,16	0,11–0,16	0,11–0,16
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,11–0,16	0,11–0,16	0,11–0,16	0,11–0,16
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,14–0,24	0,14–0,25	0,14–0,25	0,14–0,25
0,14–0,22	0,14–0,22	0,14–0,22	0,14–0,22
0,14–0,22	0,14–0,22	0,14–0,22	0,14–0,22
0,10–0,18	0,10–0,18	0,10–0,18	0,10–0,18
0,10–0,18	0,10–0,18	0,10–0,18	0,10–0,18
0,10–0,18	0,10–0,18	0,10–0,18	0,10–0,18
0,12–0,18	0,12–0,18	0,12–0,18	0,12–0,18
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,12–0,18	0,12–0,18	0,12–0,18	0,12–0,18
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,12–0,18	0,12–0,18	0,12–0,18	0,12–0,18
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,20–0,30	0,20–0,30	0,20–0,30	0,20–0,30
0,18–0,28	0,18–0,28	0,18–0,28	0,18–0,28
0,20–0,30	0,20–0,30	0,20–0,30	0,20–0,30
0,20–0,30	0,20–0,30	0,20–0,30	0,20–0,30
0,20–0,30	0,20–0,30	0,20–0,30	0,20–0,30
0,18–0,28	0,18–0,28	0,18–0,28	0,18–0,28
0,20–0,30	0,20–0,30	0,20–0,30	0,20–0,30
0,18–0,28	0,18–0,28	0,18–0,28	0,18–0,28
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,12–0,18	0,12–0,18	0,12–0,18	0,12–0,18
0,15–0,21	0,15–0,21	0,15–0,21	0,15–0,21
0,12–0,18	0,12–0,18	0,12–0,18	0,12–0,18
0,12–0,18	0,12–0,18	0,12–0,18	0,12–0,18
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,10–0,16	0,10–0,16	0,10–0,16	0,10–0,16
0,02–0,06	0,02–0,06	0,02–0,06	0,02–0,06
0,01–0,02	0,01–0,02	0,01–0,02	0,01–0,02
0,01–0,02	0,01–0,02	0,01–0,02	0,01–0,02

KUB Pentron – extension		
ABS	ABS	PSC
Ø 46–52 mm	Ø 53–65 mm	Ø 30–37 mm
f in mm/rev.		
0,14	0,14	0,06–0,12
0,20	0,20	0,06–0,12
0,16	0,16	0,11–0,16
0,20	0,20	0,11–0,16
0,20	0,20	0,11–0,16
0,20	0,20	0,14–0,24
0,20	0,20	0,14–0,24
0,18	0,18	0,14–0,24
0,20	0,20	0,11–0,16
0,20	0,20	0,14–0,24
0,20	0,20	0,14–0,24
0,18	0,18	0,14–0,24
0,16	0,16	0,14–0,24
0,14	0,16	0,14–0,24
0,18	0,18	0,14–0,22
0,18	0,18	0,14–0,22
0,14	0,14	0,10–0,18
0,16	0,16	0,10–0,18
0,14	0,14	0,10–0,18
0,15	0,15	0,12–0,18
0,16	0,16	0,10–0,16
0,15	0,15	0,12–0,18
0,12	0,12	0,10–0,16
0,30	0,30	0,20–0,30
0,20	0,20	0,20–0,30
0,20	0,20	0,20–0,30
0,22	0,22	0,20–0,30
0,22	0,22	0,20–0,30
0,22	0,25	0,20–0,30
0,22	0,22	0,20–0,30
0,22	0,25	0,20–0,30
0,12	0,12	0,10–0,18
0,12	0,12	0,10–0,18
0,18	0,18	0,10–0,18
0,18	0,18	0,10–0,18
0,20	0,20	0,10–0,18
0,20	0,20	0,10–0,18
0,22	0,22	0,10–0,18
0,22	0,22	0,10–0,18
0,15	0,15	0,10–0,18
0,15	0,15	0,10–0,18
0,15	0,16	0,10–0,18
0,16	0,16	0,10–0,18
0,16	0,16	0,10–0,18
0,16	0,16	0,10–0,18
0,16	0,16	0,10–0,18
0,08	0,08	0,05–0,12
0,10	0,10	0,05–0,12
0,10	0,10	0,05–0,12
0,10	0,10	0,05–0,12
0,10	0,10	0,05–0,12
0,08	0,08	0,05–0,12
0,08	0,08	0,05–0,12
0,08	0,08	0,05–0,12
0,10	0,10	0,07–0,15
0,10	0,10	0,07–0,15
0,10	0,10	0,02–0,06
0,10	0,10	0,01–0,02



In order to ensure efficient chip evacuation, coolant pressure must be at least 5 bar. Optimum pressure is > 15 bar.

NC machine reamers, sim. DIN 8093-A

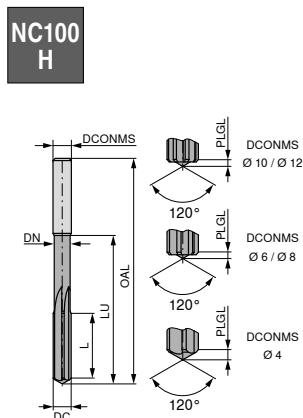

NEW U4

Article no.
40 435 ...


DC h7	OAL	L	LU	DCONMS h5	PLGL	
mm	mm	mm	mm	mm	mm	£
0.98	50	6	16	4	0.12	86.78
0.99	50	6	16	4	0.12	86.78
1.00	50	6	16	4	0.12	86.78
1.01	50	6	16	4	0.12	86.78
1.02	50	6	16	4	0.12	86.78
1.03	50	6	16	4	0.12	86.78
1.48	50	9	16	4	0.12	94.71
1.49	50	9	16	4	0.12	94.71
1.50	50	9	16	4	0.12	94.71
1.51	50	9	16	4	0.12	94.71
1.52	50	9	16	4	0.12	94.71
1.60	50	10	16	4	0.12	94.71
1.70	50	10	16	4	0.12	94.71
1.80	50	11	16	4	0.12	94.71
1.90	50	11	16	4	0.12	94.71
1.97	50	12	16	4	0.30	94.71
1.98	50	12	16	4	0.30	94.71
1.99	50	12	16	4	0.30	94.71
2.00	50	12	16	4	0.30	94.71
2.01	50	12	16	4	0.30	94.71
2.02	50	12	16	4	0.30	94.71
2.03	50	12	16	4	0.30	94.71
2.05	50	12	16	4	0.30	94.71
2.10	50	12	16	4	0.30	94.71
2.20	50	13	16	4	0.30	94.71
2.30	50	13	16	4	0.30	94.71
2.40	60	16	26	4	0.30	94.71
2.50	60	16	26	4	0.30	94.71
2.60	60	16	26	4	0.30	94.71
2.70	64	17	30	4	0.30	94.71
2.80	64	17	30	4	0.30	94.71
2.90	64	17	30	4	0.30	94.71
2.97	64	17	30	4	0.30	94.71
2.98	64	17	30	4	0.30	94.71
2.99	64	17	30	4	0.30	94.71
3.00	64	17	30	4	0.30	94.71
3.01	64	17	30	4	0.30	94.71
3.02	64	17	30	4	0.30	94.71
3.03	64	17	30	4	0.30	94.71
3.05	68	18	34	4	0.30	94.71
3.10	68	18	34	4	0.30	94.71
3.20	68	18	34	4	0.30	94.71
3.30	68	18	34	4	0.30	94.71
3.40	74	20	40	4	0.30	94.71
3.50	74	20	40	4	0.30	94.71
3.60	74	20	40	4	0.30	94.71
3.70	74	20	40	4	0.30	94.71
3.80	77	21	43	4	0.40	94.71
3.90	77	21	43	4	0.40	94.71
3.97	77	21	43	4	0.40	94.71
3.98	77	21	43	4	0.40	94.71
3.99	77	21	43	4	0.40	94.71
4.00	77	21	43	4	0.40	94.71
4.01	77	21	43	4	0.40	94.71
4.02	77	21	43	4	0.40	94.71
4.03	77	21	43	4	0.40	94.71
4.05	82	21	40	6	0.40	116.87

DC h7	OAL	L	LU	DCONMS h5	PLGL	Article no. 40 435 ...
mm	mm	mm	mm	mm	mm	£
4.10	82	21	40	6	0.40	116.87 04100
4.20	82	21	40	6	0.40	116.87 04200
4.30	82	23	40	6	0.40	116.87 04300
4.40	82	23	40	6	0.40	116.87 04400
4.50	82	23	40	6	0.40	116.87 04500
4.60	82	23	40	6	0.40	116.87 04600
4.70	82	23	40	6	0.40	116.87 04700
4.80	93	26	51	6	0.50	116.87 04800
4.90	93	26	51	6	0.50	116.87 04900
4.97	93	26	51	6	0.50	116.87 04970
4.98	93	26	51	6	0.50	116.87 04980
4.99	93	26	51	6	0.50	116.87 04990
5.00	93	26	51	6	0.50	116.87 05000
5.01	93	26	51	6	0.50	116.87 05010
5.02	93	26	51	6	0.50	116.87 05020
5.03	93	26	51	6	0.50	116.87 05030
5.05	93	26	51	6	0.50	116.87 05050
5.10	93	26	51	6	0.50	116.87 05100
5.20	93	26	51	6	0.50	116.87 05200
5.30	93	26	51	6	0.50	116.87 05300
5.40	93	26	51	6	0.50	116.87 05400
5.50	93	26	51	6	0.50	116.87 05500
5.60	93	26	51	6	0.50	116.87 05600
5.70	93	26	51	6	0.50	116.87 05700
5.80	93	26	51	6	0.50	116.87 05800
5.90	93	26	51	6	0.50	116.87 05900
5.97	93	26	51	6	0.50	116.87 05970
5.98	93	26	51	6	0.50	116.87 05980
5.99	93	26	51	6	0.50	116.87 05990
6.00	93	26	51	6	0.50	116.87 06000


Steel	○
Stainless steel	○
Cast iron	○
Non ferrous metals	
Heat resistant alloys	
Hardened materials	●

i This tool concept covers countless tolerances.
Tolerances that can be covered can be found in the table on
→ **Main catalogue page 04/75**
Intermediate dimensions available on request.

NC machine reamers, sim. DIN 8093-A

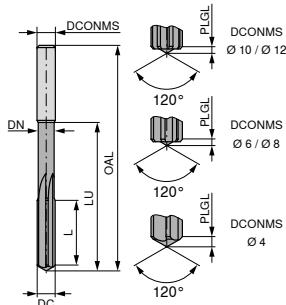NC100
H

TiAlSiN



DC _{H7}	OAL	L	LU	DCONMS _{h5}		PLGL	NEW U4 Article no.	£
				mm	mm			
10.03	133	41	87	10	0.8	178.50	10030	
10.04	133	41	87	10	0.8	178.50	10040	
10.05	133	41	87	10	0.8	178.50	10050	
11.17	150	44	99	12	0.8	233.85	11170	
11.97	150	44	99	12	0.8	233.85	11970	
11.98	150	44	99	12	0.8	233.85	11980	
11.99	150	44	99	12	0.8	233.85	11990	
12.00	150	44	99	12	0.8	233.85	12000	
12.01	150	44	99	12	0.8	233.85	12010	
12.02	150	44	99	12	0.8	233.85	12020	
12.03	150	44	99	12	0.8	233.85	12030	
12.04	150	44	99	12	0.8	233.85	12040	
12.05	150	44	99	12	0.8	233.85	12050	

Steel	○
Stainless steel	○
Cast iron	○
Non ferrous metals	
Heat resistant alloys	
Hardened materials	●

DC _{H7} | OAL | L | LU | DCONMS _{h5} | PLGL

DC _{H7}	OAL	L	LU	DCONMS _{h5}	PLGL	NEW U4 Article no.	£
mm	mm	mm	mm	mm	mm	40 435 ...	
6.01	93	26	51	6	0.5	116.87	06010
6.02	93	26	51	6	0.5	116.87	06020
6.03	93	26	51	6	0.5	116.87	06030
6.05	101	26	59	8	0.5	145.82	06050
6.10	101	26	59	8	0.5	145.82	06100
6.20	101	26	59	8	0.5	145.82	06200
6.30	101	26	59	8	0.5	145.82	06300
6.40	101	26	59	8	0.5	145.82	06400
6.50	101	26	59	8	0.5	145.82	06500
6.60	101	26	59	8	0.5	145.82	06600
6.70	101	26	59	8	0.5	145.82	06700
6.80	109	31	67	8	0.6	145.82	06800
6.85	109	31	67	8	0.6	145.82	06850
6.90	109	31	67	8	0.6	145.82	06900
7.00	109	31	67	8	0.6	145.82	07000
7.10	109	31	67	8	0.6	145.82	07100
7.20	109	31	67	8	0.6	145.82	07200
7.30	109	31	67	8	0.6	145.82	07300
7.40	109	31	67	8	0.6	145.82	07400
7.50	109	31	67	8	0.6	145.82	07500
7.60	109	31	67	8	0.6	145.82	07600
7.70	117	33	75	8	0.6	145.82	07700
7.80	117	33	75	8	0.6	145.82	07800
7.90	117	33	75	8	0.6	145.82	07900
7.97	117	33	75	8	0.6	145.82	07970
7.98	117	33	75	8	0.6	145.82	07980
7.99	117	33	75	8	0.6	145.82	07990
8.00	117	33	75	8	0.6	145.82	08000
8.01	117	33	75	8	0.7	145.82	08010
8.02	117	33	75	8	0.7	145.82	08020
8.03	117	33	75	8	0.7	145.82	08030
8.05	117	33	71	10	0.7	178.50	08050
8.10	117	33	71	10	0.7	178.50	08100
8.20	117	33	71	10	0.7	178.50	08200
8.30	117	33	71	10	0.7	178.50	08300
8.40	117	33	71	10	0.7	178.50	08400
8.50	117	33	71	10	0.7	178.50	08500
8.60	117	33	71	10	0.7	178.50	08600
8.70	125	36	79	10	0.7	178.50	08700
8.80	125	36	79	10	0.7	178.50	08800
8.90	125	36	79	10	0.7	178.50	08900
9.00	125	36	79	10	0.7	178.50	09000
9.10	125	36	79	10	0.7	178.50	09100
9.20	125	36	79	10	0.7	178.50	09200
9.30	125	36	79	10	0.7	178.50	09300
9.40	125	36	79	10	0.7	178.50	09400
9.50	125	36	79	10	0.7	178.50	09500
9.60	125	36	79	10	0.7	178.50	09600
9.70	133	38	87	10	0.7	178.50	09700
9.80	133	38	87	10	0.7	178.50	09800
9.90	133	38	87	10	0.7	178.50	09900
9.97	133	41	87	10	0.7	178.50	09970
9.98	133	41	87	10	0.7	178.50	09980
9.99	133	41	87	10	0.7	178.50	09990
10.00	133	41	87	10	0.7	178.50	10000
10.01	133	41	87	10	0.7	178.50	10010
10.02	133	41	87	10	0.8	178.50	10020

i This tool concept covers countless tolerances.
Tolerances that can be covered can be found in the table on
→ Main catalogue page 04/75
Intermediate dimensions available on request.

Cutting data approximate values


		Material	Strength N/mm ² / HB / HRC	v _c m/min without through coolant	TiAlSiN solid carbide reamer										
Index					≤ Ø 4		> Ø 4 ≤ Ø 8		> Ø 8 ≤ Ø 16		> Ø 16 ≤ Ø 20				
					f mm/rev.	Reaming allowance Ø mm	f mm/rev.	Reaming allowance Ø mm	f mm/rev.	Reaming allowance Ø mm	f mm/rev.	Reaming allowance Ø mm			
P	1.1	General construction steel	< 800 N/mm ²	14	0,08	0,2	0,16	0,2	0,195	0,3	0,23	0,3			
	1.2	Free cutting steel	< 800 N/mm ²	19	0,08	0,2	0,16	0,2	0,195	0,3	0,23	0,3			
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	16	0,1	0,2	0,2	0,2	0,238	0,3	0,275	0,3			
	1.4	Alloyed hardened steel	< 1000 N/mm ²	14	0,08	0,2	0,16	0,2	0,195	0,3	0,23	0,3			
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	13	0,08	0,2	0,16	0,2	0,195	0,3	0,23	0,3			
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	12	0,075	0,2	0,15	0,2	0,175	0,3	0,2	0,3			
	1.7	Tempering steel, alloyed	< 800 N/mm ²	13	0,08	0,2	0,16	0,2	0,195	0,3	0,23	0,3			
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	11	0,063	0,2	0,125	0,2	0,15	0,3	0,175	0,3			
	1.9	Steel castings	< 850 N/mm ²	15	0,08	0,2	0,16	0,2	0,195	0,3	0,23	0,3			
	1.10	Nitriding steel	< 1000 N/mm ²	16	0,1	0,2	0,2	0,2	0,238	0,3	0,275	0,3			
	1.11	Nitriding steel	< 1200 N/mm ²	12	0,075	0,2	0,15	0,2	0,175	0,3	0,2	0,3			
	1.12	Roller bearing steel	< 1200 N/mm ²	11	0,063	0,2	0,125	0,2	0,15	0,3	0,175	0,3			
	1.13	Spring steel	< 1200 N/mm ²												
	1.14	High-speed steel	< 1300 N/mm ²												
	1.15	Cold working tool steel	< 1300 N/mm ²	9	0,063	0,2	0,125	0,2	0,15	0,3	0,175	0,3			
	1.16	Hot working tool steel	< 1300 N/mm ²	9	0,063	0,2	0,125	0,2	0,15	0,3	0,175	0,3			
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	11	0,063	0,1	0,125	0,1	0,15	0,2	0,175	0,2			
	2.2	Stainless steel, ferritic	< 750 N/mm ²	11	0,063	0,1	0,125	0,1	0,15	0,2	0,175	0,2			
	2.3	Stainless steel, martensitic	< 900 N/mm ²	8	0,05	0,1	0,1	0,1	0,113	0,2	0,125	0,2			
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	8	0,05	0,1	0,1	0,1	0,113	0,2	0,125	0,2			
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	9	0,063	0,1	0,125	0,1	0,15	0,2	0,175	0,2			
	2.6	Stainless steel, austenitic	< 750 N/mm ²												
	2.7	Heat resistant steel	< 1100 N/mm ²												
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	17	0,125	0,2	0,25	0,2	0,325	0,3	0,4	0,3			
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	14	0,113	0,2	0,225	0,2	0,275	0,3	0,325	0,3			
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	17	0,113	0,2	0,225	0,2	0,275	0,3	0,325	0,3			
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	14	0,1	0,2	0,2	0,2	0,238	0,3	0,275	0,3			
	3.5	White malleable cast iron	270–450 N/mm ²	17	0,113	0,2	0,225	0,2	0,275	0,3	0,325	0,3			
	3.6	White malleable cast iron	500–650 N/mm ²	14	0,1	0,2	0,2	0,2	0,238	0,3	0,275	0,3			
	3.7	Black malleable cast iron	300–450 N/mm ²	17	0,113	0,2	0,225	0,2	0,275	0,3	0,325	0,3			
	3.8	Black malleable cast iron	500–800 N/mm ²	14	0,1	0,2	0,2	0,2	0,238	0,3	0,275	0,3			
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²												
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²												
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²												
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²												
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²												
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²												
	4.7	Copper wrought alloys	< 700 N/mm ²												
	4.8	Special copper alloys	< 200 HB												
	4.9	Special copper alloys	< 300 HB												
	4.10	Special copper alloys	> 300 HB												
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²												
	4.12	Long-chipping brass	< 600 N/mm ²												
	4.13	Thermoplastics													
	4.14	Duroplastics													
	4.15	Fibre-reinforced plastics													
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²												
	4.17	Graphite													
	4.18	Tungsten and tungsten alloys													
	4.19	Molybdenum and molybdenum alloys													
S	5.1	Pure nickel													
	5.2	Nickel alloys													
	5.3	Nickel alloys	< 850 N/mm ²												
	5.4	Nickel molybdenum alloys													
	5.5	Nickel-chromium alloys	< 1300 N/mm ²												
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²												
	5.7	Heat resistant alloys	< 1300 N/mm ²												
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²												
	5.9	Pure titanium	< 900 N/mm ²												
	5.10	Titanium alloys	< 700 N/mm ²												
	5.11	Titanium alloys	< 1200 N/mm ²												
H	6.1		< 45 HRC	8	0,075	0,1	0,15	0,2	0,175	0,3	0,2	0,3			
	6.2		46–55 HRC	8	0,063	0,1	0,125	0,2	0,15	0,3	0,175	0,3			
	6.3	Tempered steel	56–60 HRC	7	0,063	0,1	0,125	0,2	0,15	0,3	0,175	0,3			
	6.4		61–65 HRC	5	0,05	0,1	0,1	0,2	0,113	0,3	0,125	0,3			
	6.5		65–70 HRC												

Insert countersink 90°

Supply details:

Indexable insert countersink including clamping screws

WPS

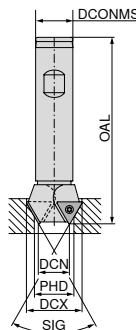

B

NEW U1

Article no.
30 196 ...

£

DCX	DCN	PHD	ZEFP	DCONMS	OAL	Insert		
mm	mm	mm		mm	mm			
19	7	9.5	2	16	100	TOHX 090204	367.29	19000
23	11	12.0	2	16	100	TOHX 090204	372.41	23000
26	11	12.0	1	16	100	TOHX 090204	375.87	26000
30	12	13.0	2	20	100	TOHX 140305	393.03	30000
34	16	17.0	2	20	100	TOHX 140305	399.80	34000
37	19	20.0	2	20	100	TOHX 140305	399.80	37000



TORX® Screws



Key D

Spare parts

Insert

TOHX 090204
TOHX 140305

Article no.
62 950 ...

£

Article no.
80 950 ...

£


M2,6x6,2 - 08IP	2.23 09900	T08 - IP	13.49	125
M3,5x7,3 - 10IP	2.23 12600	T10 - IP	15.31	127

Insert countersink 60°

Supply details:

Indexable insert countersink including clamping screws

WPS



B

NEW U1

Article no.
30 197 ...

£

372.41 16500
375.87 20000
393.03 22000
399.80 23500
399.80 25500

DCX	DCN	PHD	ZEFP	DCONMS	OAL	Insert
mm	mm	mm		mm	mm	
16.5	8.1	8.5	1	16	100	TOHX 090204
20.0	11.6	12.0	2	16	100	TOHX 090204
22.0	13.6	14.0	2	16	100	TOHX 140305
23.5	15.1	15.5	2	16	100	TOHX 140305
25.5	17.1	17.5	2	16	100	TOHX 140305



TORX® Screws



Key D

Spare parts
Insert

TOHX 090204
TOHX 140305
TOHX 140305

Article no.
62 950 ...

£


13.49 125
13.49 125
13.49 125Article no.
80 950 ...

£

13.49 125
13.49 125
13.49 125

TOHX

Designation	L	S	D1	IC
	mm	mm	mm	mm
090204EN	9.12	2.50	2.8	5.6
090204FN	9.12	2.50	2.8	5.6
140305EN	13.62	3.00	3.8	8.2
140305FN	13.62	3.00	3.8	8.2



TOHX

-G06
BK8425**-U877**
BK8425**-G12**
BK8425**F**
TOHX**NEW 1A/3#**

Article no.

62 602 ...

£

22.50

33000

F
TOHX**NEW 1A/3#**

Article no.

62 604 ...

£

19.47

31400

F
TOHX**NEW 1A/3#**

Article no.

62 603 ...

£

20.05

31400

ISO	RE
	mm
090204EN	0.4
140305EN	0.5

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	
Heat resistant alloys	
Hardened materials	

TOHX

-U877
K10**-G12**
K10

ISO	RE
	mm
090204EN	0.4
090204FN	0.4
140305FN	0.5

Steel	•
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
Hardened materials	

Cutting data approximate values

				Insert countersink 60°/90° 30 196 ... , 30 197 ...		
				Tool diameter Ø 16,5 - 37	Insert	
				(mm/U)	V _c m/min	V _c m/min
P	1.1	General construction steel	< 800 N/mm ²	220	0,10	150-220
	1.2	Free cutting steel	< 800 N/mm ²	220	0,25	150-220
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	220	0,15	150-220
	1.4	Alloyed hardened steel	< 1000 N/mm ²	180	0,20	150-220
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	200	0,20	150-220
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	180	0,20	150-220
	1.7	Tempering steel, alloyed	< 800 N/mm ²	180	0,20	150-220
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	150	0,20	150-220
	1.9	Steel castings	< 850 N/mm ²	160	0,15	150-220
	1.10	Nitriding steel	< 1000 N/mm ²	180	0,15	150-220
	1.11	Nitriding steel	< 1200 N/mm ²	160	0,15	150-220
	1.12	Roller bearing steel	< 1200 N/mm ²	160	0,12	150-220
	1.13	Spring steel	< 1200 N/mm ²	150	0,12	150-220
	1.14	High-speed steel	< 1300 N/mm ²	120	0,10	60-120
	1.15	Cold working tool steel	< 1300 N/mm ²	120	0,12	60-120
	1.16	Hot working tool steel	< 1300 N/mm ²	140	0,10	100-150
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	140	0,10	100-150
	2.2	Stainless steel, ferritic	< 750 N/mm ²	150	0,12	100-150
	2.3	Stainless steel, martensitic	< 900 N/mm ²	150	0,12	100-150
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	120	0,12	100-120
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	120	0,15	100-140
	2.6	Stainless steel, austenitic	< 750 N/mm ²	120	0,15	100-140
	2.7	Heat resistant steel	< 1100 N/mm ²	100	0,12	80-100
K	3.1	Grey cast iron with lamellar graphite	100-350 N/mm ²	180	0,35	120-180
	3.2	Grey cast iron with lamellar graphite	300-500 N/mm ²	120	0,30	120-180
	3.3	Gray cast iron with spheroidal graphite	300-500 N/mm ²	120	0,30	120-180
	3.4	Gray cast iron with spheroidal graphite	500-900 N/mm ²	120	0,30	120-180
	3.5	White malleable cast iron	270-450 N/mm ²	120	0,20	120-180
	3.6	White malleable cast iron	500-650 N/mm ²	120	0,20	120-180
	3.7	Black malleable cast iron	300-450 N/mm ²	120	0,20	120-180
	3.8	Black malleable cast iron	500-800 N/mm ²	120	0,20	120-180
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²	350	0,35	0-500
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²	350	0,35	0-500
	4.3	Aluminium alloy 0.5-10 % Si	< 400 N/mm ²	250	0,20	0-500
	4.4	Aluminium alloys 10-15 % Si	< 400 N/mm ²	150	0,30	0-500
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²	200	0,25	0-500
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²	200	0,30	0-500
	4.7	Copper wrought alloys	< 700 N/mm ²	200	0,30	0-500
	4.8	Special copper alloys	< 200 HB	250	0,30	0-500
	4.9	Special copper alloys	< 300 HB	250	0,30	0-500
	4.10	Special copper alloys	> 300 HB	200	0,30	0-500
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²	250	0,20	0-500
	4.12	Long-chipping brass	< 600 N/mm ²	250	0,30	0-500
	4.13	Thermoplastics		50	0,20	0-500
	4.14	Duroplastics		50	0,20	0-500
	4.15	Fibre-reinforced plastics		100	0,10	0-500
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²	150	0,25	0-500
	4.17	Graphite		150	0,20	0-500
	4.18	Tungsten and tungsten alloys				
	4.19	Molybdenum and molybdenum alloys				
S	5.1	Pure nickel		100	0,15	80-100
	5.2	Nickel alloys		100	0,15	80-100
	5.3	Nickel alloys	< 850 N/mm ²	50	0,10	20-50
	5.4	Nickel molybdenum alloys		50	0,10	20-50
	5.5	Nickel-chromium alloys	< 1300 N/mm ²	50	0,10	20-50
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²	50	0,10	20-50
	5.7	Heat resistant alloys	< 1300 N/mm ²	50	0,08	20-50
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²	50	0,08	20-50
	5.9	Pure titanium	< 900 N/mm ²	30	0,15	15-30
	5.10	Titanium alloys	< 700 N/mm ²	30	0,15	15-30
	5.11	Titanium alloys	< 1200 N/mm ²	30	0,10	15-30
H	6.1		< 45 HRC	50	0,10	20-50
	6.2		46-55 HRC	50	0,06	20-50
	6.3	Tempered steel	56-60 HRC			
	6.4		61-65 HRC			
	6.5		65-70 HRC			




PROJECTS IN THE BEST OF HANDS

From conception to successful completion,
we realize your application-specific projects

FF precision adjustment head

Scope of supply:

Head with clamping screw
without precision turning insert

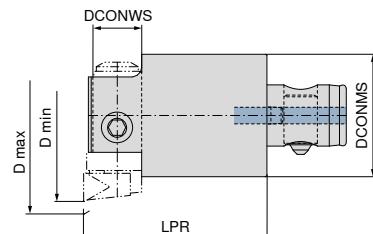ABS**NEW W4****Article no.****62 810 ...****£**

D _{min} - D _{max} mm	KOMET no.	Adapter	DCONWS mm	DCONMS mm	LPR mm	
29,5 - 36	B30 11010	ABS 25	10	25	50	271.15 03690
35,5 - 42	B30 11020	ABS 25	10	25	50	271.15 04290
39 - 45	B30 12010	ABS 32	12	32	60	282.59 04589
44 - 50	B30 12020	ABS 32	12	32	60	282.59 05089
47 - 57	B30 13010	ABS 40	16	40	60	299.75 05788
56 - 66	B30 13020	ABS 40	16	40	60	299.75 06688
58 - 71	B30 14010	ABS 50	20	50	70	331.76 07197
70 - 83	B30 14020	ABS 50	20	50	70	331.76 08397
79 - 94	B30 15010	ABS 63	25	63	70	384.34 09496
93 - 108	B30 15020	ABS 63	25	63	70	384.34 10896
100 - 121	B30 16010	ABS 80	32	80	90	459.91 12192
120 - 141	B30 16020	ABS 80	32	80	90	459.91 14192
138 - 159	B30 17010	ABS 100	32	100	90	531.96 15991
158 - 179	B30 17020	ABS 100	32	100	90	531.96 17991
178 - 199	B30 17030	ABS 100	32	100	90	531.96 19991

W7

Clamping screw


Spare parts
DCONWS
Article no.**62 950 ...****£**

10	M6x6/SW3	0.96	44700
12	M8x10/SW4	1.73	44800
12	M8x8/SW4	1.48	14700
16	M10x10/SW5	1.73	44900
20	M12x12/SW6	0.96	45000
25	M16x16/SW8	0.96	45100
32	M20x20/SW10	1.93	45200
32	M20x30/SW10	2.21	45300

FF precision turning insert

Scope of supply:

Precision turning insert with WPL screw
Please order WPL separately



for	DCONWS	KOMET no.	LF	Insert	NEW	W4	Article no.
	mm		mm				£
62 810 0369 / 62 810 04290	10	M30 20011	28.5	TO..06T1			340.89 03000
62 810 04589 / 62 810 05089	12	M30 20021	37.5	TO..06T1			379.83 03900
62 810 05788 / 62 810 06688	16	M30 20031	45.0	TO..0902			416.46 04700
62 810 07197 / 62 810 08397	20	M30 20041	56.0	TO..0902			481.58 05800
62 810 09496 / 62 810 10896	25	M30 20051	77.5	TO..1403			523.93 07900
62 810 12192 / 62 810 14192	32	M30 20061	97.0	TO..1403			616.66 10000
62 810 15991 / 62 810 17991 / 62 810 19991	32	M30 20071	131.0	TO..1403			662.42 13800


Spare parts	DCONWS	Article no.
		£
10		M2x3,8/IP6 2.56 12800
12		M2x3,8/IP6 2.56 12800
16		M2,6x5,2 - 08IP 2.23 12000
20		M2,6x6,2 - 08IP 2.23 09900
25		M3,5x7,3 - 10IP 2.23 12600
32		M3,5x7,3 - 10IP 2.23 12600

MicroKom - M03Speed - precision adjustment head

Scope of supply:

Precision adjustment head with clamping screw
Please order insert holder and indexable insert separately

ABS

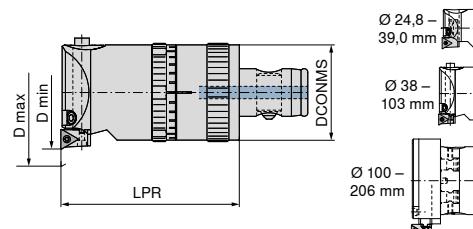

$D_{min} - D_{max}$ mm	KOMET no.	Adapter	DCONMS	LPR	NEW W4 Article no. 62 815 ...	£
24,8 - 33,0	M03 00115	ABS 25	25	50		1,743,50 03390
29 - 39	M03 00515	ABS 25	25	50		1,782,00 03990
38 - 50	M03 01025	ABS 32	32	60		1,870,00 05089
49 - 63	M03 01535	ABS 40	40	70		2,106,50 06388
62 - 80	M03 02045	ABS 50	50	75		2,244,00 08097
100 - 206	M03 20090	ABS 63	63	106		1,859,00 20696 ¹⁾
79 - 103	M03 02555	ABS 63	63	80		2,466,20 10396

1) can only be used with interchangeable bridge (Art. No. 62 865 ...)



TORX® Screws



Grub screw



Grubscrew

DCONMS	Article no. 62 950 ...	Article no. 10 950 ...	Article no. 10 950 ...
25			M4X0,5 1,73 15600
32	M3,5x7,3 - 10IP 2,23 12600		M4X0,5 1,73 15600
40	M3,5x7,3 - 10IP 2,23 12600		M5X0,5 1,73 15700
50	M3,5x7,3 - 10IP 2,23 12600		M5X0,5 1,73 15700
63	M5x9,4/IP6 2,60 45400		
63	M5x9,4/IP6 2,60 45400	M6x8 - SW3 0,96 11300	

A detailed operating manual is available for download in the online shop next to the product.

MicroKom – M03Speed – Insert holder

Scope of supply:

without inserts
incl. mounting screws



for	KOMET no.	Insert	NEW	W4	Article no.
62 815 03990	M03 10021	TO.. 06T1	155.54	03900	
62 815 06388 / 62 815 08097	M03 10033	TO.. 06T1	128.15	05000	
62 815 03390	M03 10011	TO.. 06T1	155.54	03300	
62 815 06388 / 62 815 08097	M03 10043	TO.. 0902	128.15	08000	
62 815 20696	M03 10070	TO.. 0902	136.18	20600	
62 815 10396	M03 10063	TO.. 0902	136.18	10300	



TORX® Screws

Article no.

62 950 ...

£

2.56 09700

2.23 12000



Spare parts
Insert

TO.. 06T1

TO.. 0902

MicroKom – M03Speed – Interchangeable bridge


▲ for head 62 815 20696




D _{min} - D _{max} mm	KOMET no.	NEW	W4	Article no.
100 - 130	M03 20100	749.32	13000	
128 - 168	M03 20110	859.10	16800	
166 - 206	M03 20120	990.66	20600	

TOHX / TOGX

Designation	L	S	D1	IC
	mm	mm	mm	mm
TOHX 06T1..	6.50	1.80	2.2	4.0
TOHX 0902..	9.12	2.50	2.8	5.6
TO.X 1403..	13.62	3.00	3.8	8.2



TOHX

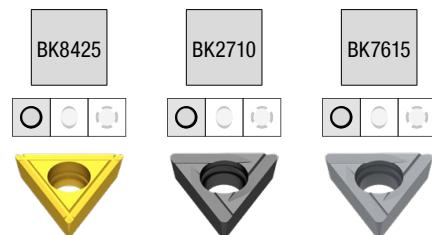

ISO	KOMET no.	RE				
		mm				
06T103EL	W30 04120.038425	0.3			17.21	30200
090204EL	W30 14120.048425	0.4			19.47	31800
090204EN	W30 14720.048425	0.4			20.05	31400
140304EL	W30 26060.042710	0.4				23.07
140304EL	W30 26120.048425	0.4			21.94	32600
140304EL	W30 26060.047615	0.4				26.00
						82600

Steel	•	•
Stainless steel	•	•
Cast iron	•	•
Non ferrous metals		
Heat resistant alloys		
Hardened materials		•

TOGX



ISO	KOMET no.	RE			
		mm			
140304TN	W30 26990.0440	0.4			119.77
					62600


Steel	•
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	
Hardened materials	•

i Further inserts can be found in the main catalogue → **Chapter 5 Spindle tools, Page 9–11.**

TwinKom – Base body

Scope of supply:

Clamping plate incl. adjustment and fixing screws
Order tool holder (+indexable insert) and indexable inserts separately

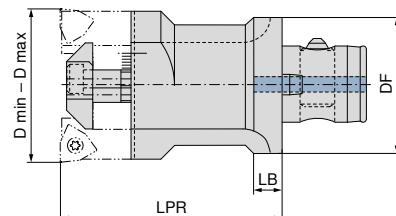ABS

D _{min} - D _{max} mm	KOMET no.	DCONMS	Adapter	LPR	LB	long		short	
						NEW	W4	NEW	W4
24 - 32	G01 70552	25	ABS 25	45	6.0			Article no. 62 870 ...	Article no. 62 870 ...
24 - 32	G01 71072	32	ABS 32	70	7.0	417.67	13289	£	403.48 03290
30 - 41	G01 70562	25	ABS 25	50				417.67	14189
30 - 41	G01 71132	32	ABS 32	85	7.5			527.78	05389
39 - 53	G01 71022	32	ABS 32	60				539.99	15388
39 - 53	G01 71622	40	ABS 40	120	8.0			562.54	17197
51 - 71	G01 71522	40	ABS 40	60				539.99	07188
51 - 71	G01 72122	50	ABS 50	135	10.0			584.10	09197
64 - 91	G01 72022	50	ABS 50	70				649.00	19196
64 - 91	G01 72622	63	ABS 63	155	13.0			665.06	12592
83 - 124	G01 72522	63	ABS 63	70				846.56	16792
83 - 124	G01 73122	80	ABS 80	155	16.5			944.35	16892
109 - 167	G01 73032	80	ABS 80	90					
109 - 167	G01 73042	80	ABS 80	175					




TwinKom
clamping plate



Grubscrew



Fixing screw




Fixing screw

Spare parts

D _{min} - D _{max}	Article no. 62 950 ...	£	Article no. 10 950 ...	£	Article no. 10 950 ...	£	Article no. 10 950 ...	
							£	£
109 - 167	93.27	47500	M8X20.SW4	1.45	16600			
24 - 32	54.29	46900	M2,5X5.SW1,3	0.61	16500	M2x4,5 TX6	2.79	15800
30 - 41	61.17	47000	M2,5X5.SW1,3	0.61	16500	M2,5x5,3 TX8	2.60	15900
39 - 53	60.41	47100				M2,5x7 TX8	2.60	16000
51 - 71	63.46	47200				M3,5x9,4 TX10	2.60	16300
64 - 91	72.65	47300	M6X12 SW3	0.96	16100		M4,5x11,5 - T15	2.60 13500
83 - 124	74.17	47400	M6X20 SW3	0.96	16200		M5x12 - SW2,5	0.96 11000



Cylindrical screw



Adjustment pin



Adjustment screw

Spare parts

D _{min} - D _{max}	Article no. 62 950 ...	£	Article no. 62 950 ...	£	Article no. 10 950 ...	
					£	£
109 - 167			M5x16	0.83	00000	109-167
24 - 32			M3X16	0.57	46000	24-32
30 - 41			M4X20	0.96	45500	30-41
39 - 53			M5X25	0.96	45600	39-53
51 - 71			M6X30	0.96	45700	51-71
64 - 91			M8X35	0.96	45800	64-91
83 - 124			M8X45	1.06	45900	83-124
					7.26	46700


i A detailed operating manual is available for download in the online shop next to the product.

TwinKom – Tool holder 90°

▲ Price per piece

Scope of supply:

including clamping screw
Order indexable inserts separately




D _{min} - D _{max} mm	KOMET no.	Insert	NEW W4 Article no. 62 871 ... £
24 - 32	G03 70330	WO.X 0403	163.57 03200
30 - 41	G03 70141	WO.X 05T3	163.57 04100
39 - 53	G03 70230	WO.X 05T3	159.06 05300
51 - 71	G03 70240	WO.X 06T3	166.98 07100
64 - 91	G03 70250	WO.X 0804	177.32 09100
83 - 124	G03 70260	WO.X 1005	192.17 12400

TwinKom – Tool holder 80°

▲ Price per piece

Scope of supply:

including clamping screw
Order indexable inserts separately



D _{min} - D _{max} mm	KOMET no.	Insert	NEW W4 Article no. 62 875 ... £
24 - 32	G03 80310	WO.X 0403	163.57 03200
30 - 41	G03 80021	WO.X 05T3	163.57 04100
39 - 53	G03 80090	WO.X 05T3	159.06 05300
51 - 71	G03 80100	WO.X 06T3	166.98 07100
64 - 91	G03 80110	WO.X 0804	177.32 09100
83 - 124	G03 80120	WO.X 1005	192.17 12400

W7



Clamping screw

Article no.

10 950 ...

£

24 - 32	2.15	10700
30 - 41	2.15	10500
39 - 53	2.15	10500
51 - 71	2.15	10600
64 - 91	2.31	12700
83 - 124	2.31	12700

D_{min} - D_{max}

24 - 32

30 - 41

39 - 53

51 - 71

64 - 91


83 - 124

TwinKom – Basic tool holder, axially adjustable

▲ Price per piece

Scope of supply:

Order indexable insert seats and indexable inserts separately




D _{min} - D _{max} mm	KOMET no.	Article no.	£
24 - 32	G03 70011	62 872 ...	177.32 03200
30 - 41	G03 70021		177.32 04100
39 - 53	G03 70031		187.66 05300
51 - 71	G03 70041		193.38 07100
64 - 91	G03 70061		231.11 09100
83 - 124	G03 70071		283.69 12400
109 - 167	G03 70081		299.75 16700

TwinKom – Indexable insert, 90°

▲ axially adjustable

Scope of supply:

including clamping screw
Order indexable inserts separately




D _{min} - D _{max} mm	KOMET no.	Insert	Article no.	£
24 - 32	D54 60510	W.O.X 0302	62 873 ...	93.18 03200
30 - 41	D54 60520	W.O.X 0403		105.91 04100
39 - 53	D54 60030	W.O.X 05T3		113.45 05300
51 - 71	D54 60040	W.O.X 06T3		122.91 07100
64 - 91	D54 60050	W.O.X 0804		126.73 09100
83 - 167	D54 60060	W.O.X 1005		139.91 12400

TwinKom – Indexable insert, 80°

▲ axially adjustable

Scope of supply:

including clamping screw
Order indexable inserts separately



D _{min} - D _{max} mm	KOMET no.	Insert	Article no.	£
24 - 32	D54 60610	W.O.X 0302	62 874 ...	93.18 03200
30 - 41	D54 60620	W.O.X 0403		105.91 04100
39 - 53	D54 60130	W.O.X 05T3		113.45 05300
51 - 71	D54 60140	W.O.X 06T3		122.91 07100
64 - 91	D54 60150	W.O.X 0804		126.73 09100
83 - 167	D54 60160	W.O.X 1005		139.91 16700


TwinKom – depths of cut

ap _{max}	P	M	K	N	S
W.O.X 0302	1,5	1,0	1,5	2,0	
W.O.X 0403	2,5	1,5	3,0	3,0	
W.O.X 05T3	4,5	3,5	5,0	5,0	
W.O.X 05T6	6,0	4,0	6,0	6,0	
W.O.X 0804	7,5	6,0	7,5	7,5	
W.O.X 1005	9,0	9,0	9,0	9,0	

i Further cutting data can be found on → pages 60+61

WOEX / WOGX

Designation	L	S	D1	IC
	mm	mm	mm	mm
WOGX 0302..	3.2	2.30	2.30	5.00
WOGX 0403..	4.1	3.18	2.55	6.35
WO.X 05T3..	5.3	3.80	2.85	8.00
WO.X 06T3..	6.6	3.80	4.05	10.00
WO.X 0804..	7.9	4.80	4.90	12.00
WOEX 1005..	9.9	5.30	4.90	15.00



WOEX



ISO	KOMET no.	RE	WOEX		
			NEW	1A/3#	Article no.
030204	W29 10010.048425	0.4			10 821 ... £
030204	W29 10010.046115	0.4			10.31 30301
040304	W29 18010.046115	0.4			14.94 40301
040304	W29 18010.048425	0.4			15.04 40401
05T304	W29 24010.048425	0.4			10.96 30401
05T304	W29 24020.046440	0.4	15.04	25502	11.25 30501
05T304	W29 24010.046115	0.4			14.46 40501
06T304	W29 34010.048425	0.4			12.57 30601
06T304	W29 34020.046440	0.4	16.64	25602	16.07 40601
06T304	W29 34010.046115	0.4			15.88 30801
080404	W29 42010.048425	0.4			20.71 25802
080404	W29 42020.046440	0.4			21.65 31001
080404	W29 42010.046115	0.4			19.85 40801
100504	W29 50010.048425	0.4			23.35 26002
100504	W29 50020.046440	0.4			23.45 41001
100504	W29 50010.046115	0.4			

Steel	•	•	•
Stainless steel	•	•	
Cast iron	•	•	•
Non ferrous metals			
Heat resistant alloys			
Hardened materials	○		

WOGX



ISO	KOMET no.	RE	WOGX		
			NEW	1A/3#	Article no.
030204	W29 10150.048430	0.4			10 821 ... £
040304	W29 18150.048430	0.4			18.72 00315
05T304	W29 24150.048430	0.4			19.47 00415
06T304	W29 34150.048430	0.4			19.76 00515
080404	W29 42150.048430	0.4			22.60 00615
					25.62 00815

Steel	●
Stainless steel	●
Cast iron	○
Non ferrous metals	○
Heat resistant alloys	○
Hardened materials	○

SpinTools – Digital Stick

- ▲ suitable for all SpinTools digital heads
- ▲ revised software for even more precise adjustment

Scope of supply:

incl. AAA Battery



NEW	W4
Article no.	62 309 ...
£	258.88
	00100

Cutting data standard values

WOEX indexable inserts										
	Index	Material	Strength N/mm ² / HB / HRC	BK8425	BK2710	BK7615	CBN40	BK6440	BK6115	BK8430
				v _c m/min						
P	1.1	General construction steel	< 800 N/mm ²	200–320	150–240			200	250–350	200
	1.2	Free cutting steel	< 800 N/mm ²	200–320	150–240			180	250–350	180
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	250–300	150–240			200	250–300	200
	1.4	Alloyed hardened steel	< 1000 N/mm ²	250–300	150–240			180	250–300	180
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	250–300	150–240			200	250–300	200
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	140–220	150–240			180	200–280	180
	1.7	Tempering steel, alloyed	< 800 N/mm ²	140–220	150–240			180	200–280	180
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	140–220	150–240			180	200–280	180
	1.9	Steel castings	< 850 N/mm ²	250–300	150–240			160	250–300	160
	1.10	Nitriding steel	< 1000 N/mm ²	140–220	150–240			180	200–280	180
	1.11	Nitriding steel	< 1200 N/mm ²	140–220	150–240			180	200–280	180
	1.12	Roller bearing steel	< 1200 N/mm ²	140–220	150–240			180	200–280	180
	1.13	Spring steel	< 1200 N/mm ²	140–220	150–240			180	200–280	180
	1.14	High-speed steel	< 1300 N/mm ²	50–90	60–120			100	70–110	100
	1.15	Cold working tool steel	< 1300 N/mm ²	120–200	60–150			140	170–230	140
	1.16	Hot working tool steel	< 1300 N/mm ²	120–200	100–150			140	170–230	140
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	150–210	100–150			120		120
	2.2	Stainless steel, ferritic	< 750 N/mm ²	150–210	100–150			120		120
	2.3	Stainless steel, martensitic	< 900 N/mm ²	150–210	100–150			140		140
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	120–200	100–120			160		160
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	110–190	100–140			120		120
	2.6	Stainless steel, austenitic	< 750 N/mm ²	120–200	100–140			120		120
	2.7	Heat resistant steel	< 1100 N/mm ²	110–190	80–100			90		90
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	140–220	120–180	120–180			160–320	180
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	140–220	120–180	120–180			160–320	140
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	140–220	120–180	120–180			120–200	140
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	120–180	120–180	120–180			100–180	120
	3.5	White malleable cast iron	270–450 N/mm ²	110–170	120–180	120–180			90–150	100
	3.6	White malleable cast iron	500–650 N/mm ²	110–170	120–180	120–180			90–150	100
	3.7	Black malleable cast iron	300–450 N/mm ²	110–170	120–180	120–180			90–150	100
	3.8	Black malleable cast iron	500–800 N/mm ²	110–170	120–180	120–180			90–150	100
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²							250
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²							250
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²							250
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²							250
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²							200
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²							250
	4.7	Copper wrought alloys	< 700 N/mm ²							250
	4.8	Special copper alloys	< 200 HB							250
	4.9	Special copper alloys	< 300 HB							250
	4.10	Special copper alloys	> 300 HB							250
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²							250
	4.12	Long-chipping brass	< 600 N/mm ²							250
S	4.13	Thermoplastics								
	4.14	Duroplastics								
	4.15	Fibre-reinforced plastics								
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²							250
	4.17	Graphite								
	4.18	Tungsten and tungsten alloys								
	4.19	Molybdenum and molybdenum alloys								
	5.1	Pure nickel								50
	5.2	Nickel alloys								50
	5.3	Nickel alloys	< 850 N/mm ²							50
H	5.4	Nickel molybdenum alloys								50
	5.5	Nickel-chromium alloys	< 1300 N/mm ²							40
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²							50
	5.7	Heat resistant alloys	< 1300 N/mm ²							50
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²							50
	5.9	Pure titanium	< 900 N/mm ²							50
	5.10	Titanium alloys	< 700 N/mm ²							50
	5.11	Titanium alloys	< 1200 N/mm ²							50
	6.1		< 45 HRC				80		50–90	140
	6.2		46–55 HRC				60		30–50	
	6.3	Tempered steel	56–60 HRC				60			
	6.4		61–65 HRC							
	6.5		65–70 HRC							

Index	FF system 62 810 ...				M03 system 62 815 ...				TwinKom G01 62 870 ...								
	v_c m/ min	Ø 29,5-50 mm	Ø 47-83 mm	Ø 79-199 mm	v_c m/ min	Ø 24,8-50 mm	Ø 38-63 mm	Ø 49-103 mm	Ø 62-206 mm	v_c m/ min	Ø 24-32 mm	Ø 30-41 mm	Ø 39-53 mm	Ø 51-71 mm	Ø 64-91 mm	Ø 83-124 mm	Ø 109-167 mm
	f in mm/rev.				f in mm/rev.				f in mm/rev.								
1.1																	
1.2																	
1.3																	
1.4																	
1.5																	
1.6	200	0,08	0,1	0,15	0,15	200	0,08	0,08	0,1	0,1	140	0,1	0,12	0,15	0,2	0,25	0,3
1.7	300	0,1	0,15	0,2	300	0,1	0,1	0,1	0,15	0,15	200						
1.8																	
1.9																	
1.10																	
1.11																	
1.12																	
1.13																	
1.14	120	0,06	0,08	0,08	120	0,06	0,06	0,08	0,08								
1.15	200	0,06	0,1	0,1	200	0,06	0,10	0,1	0,1	120	0,06	0,1	0,12	0,15	0,2	0,2	0,25
1.16	200	0,06	0,1	0,1	200	0,06	0,10	0,1	0,1	120	0,06	0,1	0,12	0,15	0,2	0,2	0,25
2.1																	
2.2																	
2.3	120	0,06	0,10	0,15	120	0,06	0,06	0,1	0,1	90	0,05	0,07	0,1	0,1	0,12	0,15	0,15
2.4	200	0,08			200	0,08	0,08			120	0,07	0,09	0,12	0,12	0,15	0,2	0,2
2.5																	
2.6																	
2.7																	
3.1	200				200					140							
3.2	240	0,15	0,20	0,30	240	0,15	0,15	0,2	0,2	180	0,12	0,15	0,25	0,25	0,3	0,35	0,35
3.3																	
3.4																	
3.5	120				180	0,1	0,15	0,15	0,15	90	0,10	0,12	0,20	0,25	0,25	0,25	0,25
3.6	180	0,1	0,15	0,25	180	0,1	0,1	0,15	0,15	140	0,12	0,15	0,3	0,35	0,35	0,35	0,35
3.7																	
3.8																	
4.1																	
4.2																	
4.3																	
4.4																	
4.5																	
4.6																	
4.7																	
4.8																	
4.9	200	0,08	0,12	0,15	200	0,08	0,08	0,12	0,12	250	0,12	0,15	0,25	0,3	0,35	0,35	
4.10	500	0,10	0,15	0,20	500	0,1	0,1	0,15	0,15	250	0,12	0,15	0,25	0,3	0,35	0,35	
4.11																	
4.12																	
4.13																	
4.14																	
4.15																	
4.16																	
4.17																	
4.18																	
4.19																	
5.1																	
5.2																	
5.3																	
5.4																	
5.5	30				50	0,06	0,08	0,08	0,08	30							
5.6	30				50	0,06	0,06	0,08	0,08	30	0,05	0,08	0,1	0,12	0,12	0,15	0,15
5.7																	
5.8																	
5.9																	
5.10																	
5.11																	
6.1	90	0,06	0,08	0,08	120	0,06	0,08	0,08	0,08								
6.2	90	0,08			120	0,08	0,08	0,08	0,08								
6.3																	
6.4																	
6.5																	


i Precision machining with depth of cut $a_p = 0.1 - 0.2$ mm (FF, M03Speed)
Depth of cut a_p for TwinKom see → page 57

Shank thread milling cutter with shank-end countersink

▲ Note: left-hand cutting



M

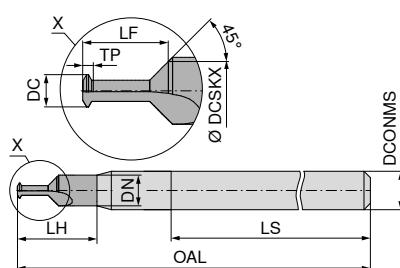

HA

Solid carbide
NEW W1
Article no.
50 804 ...

£
146.41 01000
146.41 01400
146.41 01600
137.28 02000
137.28 02200
137.28 02500

DC mm	Thread	KOMET no.	TP mm	OAL mm	DN mm	LS mm	LH mm	DCONMS _{h6} mm	DCSKX mm	LF mm	ZEFP
0.75	M1	88977001000001	0.25	40	1.8	28	2.1	3	1.5	5.2	2
1.10	M1,4	88977001000004	0.30	40	2.0	28	2.6	3	1.7	5.7	2
1.25	M1,6	88977001000005	0.35	40	2.4	28	3.1	3	2.1	6.0	2
1.60	M2	88977001000008	0.40	40	3.0	28	3.7	3	2.6		2
1.75	M2,2	88977001000009	0.45	40	3.0	28	3.9	3	2.5		2
2.05	M2,5	88977001000011	0.45	40	3.0	28	4.5	3	2.9		2

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys

Hardened materials

Cutting data approximate values

Index	Material	Strength N/mm ² / HB / HRC	V_c m/min without through coolant	SFSE Micro VHM 50 804...	
				\varnothing 1-2,5	fz
					mm/tooth
P	1.1 General construction steel	< 800 N/mm ²			
	1.2 Free cutting steel	< 800 N/mm ²			
	1.3 Hardened steel, non alloyed	< 800 N/mm ²			
	1.4 Alloyed hardened steel	< 1000 N/mm ²			
	1.5 Tempering steel, unalloyed	< 850 N/mm ²			
	1.6 Tempering steel, unalloyed	< 1000 N/mm ²			
	1.7 Tempering steel, alloyed	< 800 N/mm ²			
	1.8 Tempering steel, alloyed	< 1300 N/mm ²			
	1.9 Steel castings	< 850 N/mm ²			
	1.10 Nitriding steel	< 1000 N/mm ²			
	1.11 Nitriding steel	< 1200 N/mm ²			
	1.12 Roller bearing steel	< 1200 N/mm ²			
	1.13 Spring steel	< 1200 N/mm ²			
	1.14 High-speed steel	< 1300 N/mm ²			
	1.15 Cold working tool steel	< 1300 N/mm ²			
	1.16 Hot working tool steel	< 1300 N/mm ²			
M	2.1 Cast steel and sulphured stainless steel	< 850 N/mm ²			
	2.2 Stainless steel, ferritic	< 750 N/mm ²			
	2.3 Stainless steel, martensitic	< 900 N/mm ²			
	2.4 Stainless steel, ferritic / martensitic	< 1100 N/mm ²			
	2.5 Stainless steel, austenitic / ferritic	< 850 N/mm ²			
	2.6 Stainless steel, austenitic	< 750 N/mm ²			
	2.7 Heat resistant steel	< 1100 N/mm ²			
K	3.1 Grey cast iron with lamellar graphite	100-350 N/mm ²			
	3.2 Grey cast iron with lamellar graphite	300-500 N/mm ²			
	3.3 Gray cast iron with spheroidal graphite	300-500 N/mm ²			
	3.4 Gray cast iron with spheroidal graphite	500-900 N/mm ²			
	3.5 White malleable cast iron	270-450 N/mm ²			
	3.6 White malleable cast iron	500-650 N/mm ²			
	3.7 Black malleable cast iron	300-450 N/mm ²			
	3.8 Black malleable cast iron	500-800 N/mm ²			
N	4.1 Aluminium (non alloyed, low alloyed)	< 350 N/mm ²			
	4.2 Aluminium alloys < 0.5 % Si	< 500 N/mm ²			
	4.3 Aluminium alloy 0.5-10 % Si	< 400 N/mm ²			
	4.4 Aluminium alloys 10-15 % Si	< 400 N/mm ²			
	4.5 Aluminum alloys > 15 % Si	< 400 N/mm ²			
	4.6 Copper (non alloyed, low alloyed)	< 350 N/mm ²			
	4.7 Copper wrought alloys	< 700 N/mm ²			
	4.8 Special copper alloys	< 200 HB			
	4.9 Special copper alloys	< 300 HB			
	4.10 Special copper alloys	> 300 HB			
	4.11 Short-chipping brass, bronze, red bronze	< 600 N/mm ²			
	4.12 Long-chipping brass	< 600 N/mm ²			
S	4.13 Thermoplastics				
	4.14 Duroplastics				
	4.15 Fibre-reinforced plastics				
	4.16 Magnesium and magnesium alloys	< 850 N/mm ²			
	4.17 Graphite				
	4.18 Tungsten and tungsten alloys				
	4.19 Molybdenum and molybdenum alloys				
	5.1 Pure nickel				
	5.2 Nickel alloys				
	5.3 Nickel alloys	< 850 N/mm ²			
H	5.4 Nickel molybdenum alloys				
	5.5 Nickel-chromium alloys	< 1300 N/mm ²			
	5.6 Cobalt Chrome Alloys	< 1300 N/mm ²			
	5.7 Heat resistant alloys	< 1300 N/mm ²			
	5.8 Nickel-cobalt-chromium alloys	< 1400 N/mm ²			
	5.9 Pure titanium	< 900 N/mm ²			
	5.10 Titanium alloys	< 700 N/mm ²			
	5.11 Titanium alloys	< 1200 N/mm ²			
	6.1	< 45 HRC			
	6.2	46-55 HRC	30-50	0,01-0,015	
	6.3	56-60 HRC	20-40	0,01-0,015	
	6.4	61-65 HRC			
	6.5	65-70 HRC			

Circular shank thread milling cutter


▲ Available on request from M1



$\leq 3xD$



M

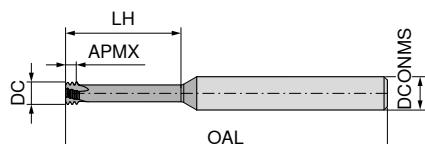

Solid carbide

NEW W1

Article no.
50 802 ...

£
72.77 02000
72.77 03000
72.77 04000
72.77 05000
72.77 06000
72.77 08000
90.68 10000
101.93 12000

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS h_6	ZEFP
1.53	M2	0.40	39	0.80	6.0	3	3
2.37	M3	0.50	58	1.35	9.5	6	3
3.10	M4	0.70	58	1.95	12.5	6	3
3.80	M5	0.80	58	2.30	16.0	6	3
4.65	M6	1.00	58	2.70	20.0	6	3
6.00	M8	1.25	58	3.20	24.0	6	3
7.80	M10	1.50	64	3.80	31.5	8	3
9.00	M12	1.75	73	4.55	37.8	10	3



M

$\leq 4xD$

NEW W1

Article no.
50 803 ...

£
81.90 02000
78.26 03000
78.26 04000
78.26 05000
78.26 06000
97.01 08000
97.01 10000

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●



When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used.
Details on → **Page 72+73.**

Cutting data approximate values

			SGF solid carbide Ti600 50 802..., 50 803...					
Index	Material	Strength N/mm ² / HB / HRC	V _c m/min	Ø 1-2	Ø 3-5	Ø 6-8	Ø 9-12	
			with through coolant	f mm/tooth	f mm/tooth	f mm/tooth	f mm/tooth	
P	1.1	General construction steel	< 800 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.2	Free cutting steel	< 800 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.4	Alloyed hardened steel	< 1000 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.7	Tempering steel, alloyed	< 800 N/mm ²	50-80	0,03-0,04	0,05-0,06	0,07-0,09	0,09-0,12
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	50-80	0,03-0,04	0,05-0,06	0,07-0,09	0,09-0,12
	1.9	Steel castings	< 850 N/mm ²	70-90	0,03-0,04	0,05-0,07	0,07-0,08	0,09-0,12
	1.10	Nitriding steel	< 1000 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.11	Nitriding steel	< 1200 N/mm ²	60-120	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	1.12	Roller bearing steel	< 1200 N/mm ²	60-90	0,03-0,05	0,04-0,06	0,06-0,08	0,09-0,11
	1.13	Spring steel	< 1200 N/mm ²	60-90	0,03-0,05	0,04-0,06	0,06-0,08	0,09-0,11
	1.14	High-speed steel	< 1300 N/mm ²	50-80	0,03-0,04	0,07-0,08	0,03-0,04	0,09-0,12
	1.15	Cold working tool steel	< 1300 N/mm ²	50-80	0,03-0,04	0,07-0,08	0,03-0,04	0,09-0,12
	1.16	Hot working tool steel	< 1300 N/mm ²	50-80	0,03-0,04	0,07-0,08	0,03-0,04	0,09-0,12
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	70-100	0,02-0,03	0,04-0,06	0,06-0,08	0,09-0,11
	2.2	Stainless steel, ferritic	< 750 N/mm ²	70-100	0,02-0,03	0,04-0,06	0,06-0,08	0,09-0,11
	2.3	Stainless steel, martensitic	< 900 N/mm ²	70-100	0,02-0,03	0,04-0,06	0,06-0,08	0,09-0,11
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	70-100	0,02-0,03	0,04-0,06	0,06-0,08	0,09-0,11
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	60-90	0,02-0,03	0,04-0,06	0,06-0,08	0,09-0,11
	2.6	Stainless steel, austenitic	< 750 N/mm ²	60-90	0,02-0,03	0,04-0,06	0,06-0,08	0,09-0,11
	2.7	Heat resistant steel	< 1100 N/mm ²	70-90	0,03-0,04	0,05-0,06	0,07-0,08	0,09-0,12
K	3.1	Grey cast iron with lamellar graphite	100-350 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.2	Grey cast iron with lamellar graphite	300-500 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.3	Gray cast iron with spheroidal graphite	300-500 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.4	Gray cast iron with spheroidal graphite	500-900 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.5	White malleable cast iron	270-450 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.6	White malleable cast iron	500-650 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.7	Black malleable cast iron	300-450 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	3.8	Black malleable cast iron	500-800 N/mm ²	40-80	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²	100-200	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	4.2	Aluminium alloys < 0,5 % Si	< 500 N/mm ²	100-200	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	4.3	Aluminium alloy 0,5-10 % Si	< 400 N/mm ²	100-200	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	4.4	Aluminium alloys 10-15 % Si	< 400 N/mm ²	100-200	0,04-0,05	0,07-0,11	0,13-0,15	0,16-0,17
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²	60-140	0,03	0,04-0,06	0,07-0,09	0,09-0,11
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.7	Copper wrought alloys	< 700 N/mm ²	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.8	Special copper alloys	< 200 HB	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.9	Special copper alloys	< 300 HB	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.10	Special copper alloys	> 300 HB	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
S	4.12	Long-chipping brass	< 600 N/mm ²	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.13	Thermoplastics		50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.14	Duroplastics		50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.15	Fibre-reinforced plastics		50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²	50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.17	Graphite		50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.18	Tungsten and tungsten alloys		50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	4.19	Molybdenum and molybdenum alloys		50-200	0,09-0,11	0,12-0,16	0,18-0,19	0,18-0,19
	5.1	Pure nickel		20-40	0,03	0,04-0,05	0,06	0,07
	5.2	Nickel alloys		20-40	0,03	0,04-0,05	0,06	0,07
H	5.3	Nickel alloys	< 850 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.4	Nickel molybdenum alloys		20-40	0,03	0,04-0,05	0,06	0,07
	5.5	Nickel-chromium alloys	< 1300 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.7	Heat resistant alloys	< 1300 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.9	Pure titanium	< 900 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.10	Titanium alloys	< 700 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	5.11	Titanium alloys	< 1200 N/mm ²	20-40	0,03	0,04-0,05	0,06	0,07
	6.1		< 45 HRC					
	6.2		46-55 HRC					
	6.3	Tempered steel	56-60 HRC					
	6.4		61-65 HRC					
	6.5		65-70 HRC					

Table of contents

Overview of inserts	66
Indexable inserts, negative	67-72
Indexable inserts, positive	73-77
Technical Information	
Cutting Data	78-80
Chip Breaker Types and Grade Overview	81

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Overview of inserts


		Steel	Stainless steel	Cast iron	Non ferrous metals	Heat resistant	Geometry					
		P	M	K	N	S	CN..	DN..	SN..	TN..	VN..	WN..
Negative												
	Fine	-F30					67	68	69	70	71	72
	Medium	-M30					67	68	69	70	71	72
		-M60					67	68	69	70		72

		Steel	Stainless steel	Cast iron	Non ferrous metals	Heat resistant	Geometry					
		P	M	K	N	S	CC..	DC..	SC..	TC..	VC..	
Positive												
	Medium	-M25					73	74		76	77	
		-M55					73	74	75	76	77	

Matching tool holders and boring bars can be found in our main catalogue → **Chapter 9, Turning tools**

CNMG

Designation	L mm	S mm	D1 mm	IC mm
CNMG 1204..	12.9	4.76	5.16	12.7

**CNMG**

-F30 CTCM120	-F30 CTCM130	-M30 CTCM120	-M30 CTCM130	-M60 CTCM120	-M60 CTCM130
-----------------	-----------------	-----------------	-----------------	-----------------	-----------------




ISO	RE mm	F CNMG	F CNMG	M CNMG	M CNMG	M CNMG	M CNMG
		NEW 1A/08 Article no. 75 010 ...	NEW 1A/08 Article no. 75 010 ...	NEW 1A/08 Article no. 75 011 ...	NEW 1A/08 Article no. 75 011 ...	NEW 1A/08 Article no. 75 012 ...	NEW 1A/08 Article no. 75 012 ...
120404EN	0.4	10.38 12800	10.38 32800				
120408EN	0.8	10.38 13000	10.38 33000	10.38 13000	10.38 33000	10.38 13000	10.38 33000
120412EN	1.2			10.38 13200	10.38 33200	10.38 13200	10.38 33200
120416EN	1.6			10.38 13400	10.38 33400	10.38 13400	10.38 33400

Steel	○	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●	●
Cast iron							
Non ferrous metals							
Heat resistant alloys							

DNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
DNMG 1104..	11.6	4.76	3.81	9.52
DNMG 1506..	15.5	6.35	5.16	12.70

**DNMG**


-F30 CTCM120 -F30 CTCM130 -M30 CTCM120 -M30 CTCM130 -M60 CTCM120 -M60 CTCM130




ISO	RE mm	F DNMG		F DNMG		M DNMG		M DNMG		M DNMG		M DNMG	
		NEW Article no.	1A/08 75 013 ...	NEW Article no.	1A/08 75 013 ...	NEW Article no.	1A/08 75 014 ...	NEW Article no.	1A/08 75 014 ...	NEW Article no.	1A/08 75 015 ...	NEW Article no.	1A/08 75 015 ...
110404EN	0.4		11.08	10400		11.08	30400						
110408EN	0.8		11.08	10600		11.08	30600		11.08	10600		11.08	30600
110412EN	1.2								11.08	10800		11.08	30800
150604EN	0.4		14.55	12800		14.55	32800						
150608EN	0.8		14.55	13000		14.55	33000		14.55	13000		14.55	33000
150612EN	1.2								14.55	13200		14.55	33200
Steel			○		○		○		○		○		○
Stainless steel			●		●		●		●		●		●
Cast iron													
Non ferrous metals													
Heat resistant alloys													

SNMG

Designation	L mm	S mm	D1 mm	IC mm
SNMG 1204...	12.7	4.76	5.16	12.7

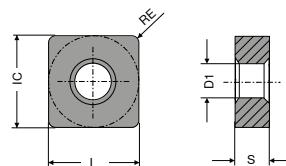**SNMG**

-F30 CTCM120	-F30 CTCM130	-M30 CTCM120	-M30 CTCM130	-M60 CTCM120	-M60 CTCM130
-----------------	-----------------	-----------------	-----------------	-----------------	-----------------

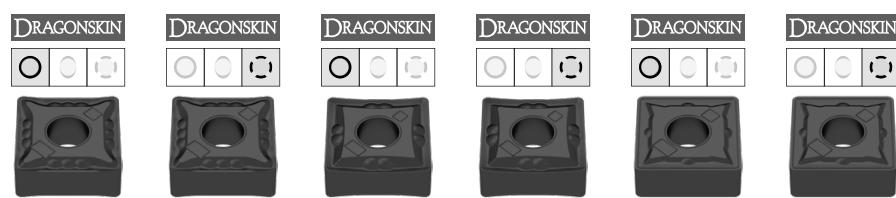


ISO	RE mm	F		M		M		M	
		SNMG	SNMG	SNMG	SNMG	SNMG	SNMG	SNMG	SNMG
		NEW 1A/08	Article no. 75 016 ...	NEW 1A/08	Article no. 75 016 ...	NEW 1A/08	Article no. 75 017 ...	NEW 1A/08	Article no. 75 018 ...
120404EN	0.4	10.57	11600	10.57	31600	10.57	11800	10.57	31800
120408EN	0.8	10.57	11800	10.57	31800	10.57	12000	10.57	32000
120412EN	1.2					10.57	12000	10.57	32000
120416EN	1.6					10.57	12200	10.57	32200

Steel	○	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●	●
Cast iron							
Non ferrous metals							
Heat resistant alloys							


TNMG

Designation	L mm	S mm	D1 mm	IC mm
TNMG 1604...	16.5	4.76	3.81	9.52



TNMG

-F30 CTCM120	-F30 CTCM130	-M30 CTCM120	-M30 CTCM130	-M60 CTCM130	-M60 CTCM120
-----------------	-----------------	-----------------	-----------------	-----------------	-----------------

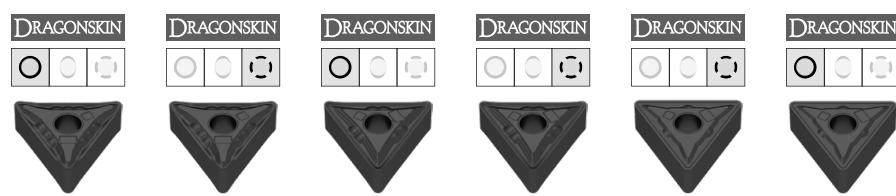


ISO	RE mm	F	F	M	M	M	M
		TNMG NEW 1A/08 Article no. 75 019 ...	TNMG NEW 1A/08 Article no. 75 019 ...	TNMG NEW 1A/08 Article no. 75 020 ...	TNMG NEW 1A/08 Article no. 75 020 ...	TNMG NEW 1A/08 Article no. 75 021 ...	TNMG NEW 1A/08 Article no. 75 021 ...
160404EN	0.4	9.27 11600	9.27 31600	9.27 11800	9.27 31800	9.27 31800	9.27 11800
160408EN	0.8	9.27 11800	9.27 31800	9.27 12000	9.27 32000	9.27 32000	9.27 12000
160412EN	1.2						

Steel	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●
Cast iron						
Non ferrous metals						
Heat resistant alloys						

VNMG

Designation	L mm	S mm	D1 mm	IC mm
VNMG 1604..	16.6	4.76	3.81	9.52



VNMG

-F30
CTCM120**-F30**
CTCM130**-M30**
CTCM120**-M30**
CTCM130**DRAGONSkin****DRAGONSkin****DRAGONSkin****DRAGONSkin****F**

VNMG

NEW 1A/08

Article no.

75 022 ...

£

F

VNMG

NEW 1A/08

Article no.

75 022 ...

£

M

VNMG

NEW 1A/08

Article no.

75 023 ...

£

M

VNMG

NEW 1A/08

Article no.

75 023 ...


£

ISO	RE mm	F VNMG Article no. 75 022 ... £	F VNMG Article no. 75 022 ... £	M VNMG Article no. 75 023 ... £	M VNMG Article no. 75 023 ... £
160404EN	0.4	18.71 11600	18.71 31600	18.71 11800	18.71 31800
160408EN	0.8	18.71 11800	18.71 31800	18.71 11800	18.71 31800

Steel	○	○	○	○
Stainless steel	●	●	●	●
Cast iron				
Non ferrous metals				
Heat resistant alloys				

WNMG

Designation	L mm	S mm	D1 mm	IC mm
WNMG 0604..	6.5	4.76	3.81	9.52
WNMG 0804..	8.6	4.76	5.16	12.70



WNMG

-F30 CTCM120 -F30 CTCM130 -M30 CTCM120 -M30 CTCM130 -M60 CTCM120 -M60 CTCM130




ISO	RE mm	F		M	
		WNMG NEW 1A/08	Article no. 75 024 ...	WNMG NEW 1A/08	Article no. 75 024 ...
060404EN	0.4	9.05	10400	9.05	30400
060408EN	0.8	9.05	10600	9.05	30600
060412EN	1.2			9.05	10800
080404EN	0.4	11.39	11600	11.39	31600
080408EN	0.8	11.39	11800	11.39	31800
080412EN	1.2			11.39	12000

Steel	○	○	○	○	○	○
Stainless steel	●	●	●	●	●	●
Cast iron						
Non ferrous metals						
Heat resistant alloys						

CCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CCMT 0602..	6.4	2.38	2.8	6.35
CCMT 09T3..	9.7	3.97	4.4	9.52
CCMT 1204..	12.9	4.76	5.5	12.70

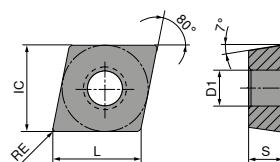

CCMT

-M25
CTCM120-M25
CTCM130-M55
CTCM120-M55
CTCM130

DRAGOSKIN

DRAGOSKIN

DRAGOSKIN

DRAGOSKIN



F CCMT

NEW 1A/08
Article no.
75 210 ...
£

F CCMT

NEW 1A/08
Article no.
75 210 ...
£

M CCMT

NEW 1A/08
Article no.
75 211 ...
£

M CCMT


NEW 1A/08
Article no.
75 211 ...
£

ISO	RE mm	F CCMT				M CCMT			
		Article no.	£						
060204EN	0.4	7.07	10400	7.07	30400	7.07	10400		
09T304EN	0.4		8.82	11600	8.82	31600	8.82	11600	8.82
09T308EN	0.8		8.82	11800	8.82	31800	8.82	11800	8.82
120404EN	0.4					12.42	12800	12.42	32800
120408EN	0.8					12.42	13000	12.42	33000

Steel	○	○	○	○
Stainless steel	●	●	●	●
Cast iron				
Non ferrous metals				
Heat resistant alloys				

DCMT

Designation	L mm	S mm	D1 mm	IC mm
DCMT 0702..	7.75	2.38	2.8	6.35
DCMT 11T3..	11.60	3.97	4.4	9.52



DCMT





-M25
CTCM120**-M25**
CTCM130**-M55**
CTCM120**-M55**
CTCM130

DRAGOSKIN

DRAGOSKIN

DRAGOSKIN

DRAGOSKIN



F DCMT	F DCMT	M DCMT	M DCMT
NEW 1A/08	NEW 1A/08	NEW 1A/08	NEW 1A/08
Article no. 75 213 ...	Article no. 75 213 ...	Article no. 75 214 ...	Article no. 75 214 ...
£	£	£	£
070202EN 0.2	7.07 10200	7.07 30200	
070204EN 0.4	7.07 10400	7.07 30400	7.07 30400
070208EN 0.8		7.07 10600	7.07 30600
11T302EN 0.2	9.92 11400	9.92 31400	
11T304EN 0.4	9.94 11600	9.94 31600	9.94 31600
11T308EN 0.8	9.94 11800	9.94 31800	9.94 31800


ISO	RE mm				
070202EN	0.2	7.07	10200		
070204EN	0.4	7.07	10400	7.07	30400
070208EN	0.8			7.07	30600
11T302EN	0.2	9.92	11400	9.92	31400
11T304EN	0.4	9.94	11600	9.94	31600
11T308EN	0.8	9.94	11800	9.94	31800

Material compatibility legend:

- Steel: ○
- Stainless steel: ●
- Cast iron: ○
- Non ferrous metals: ○
- Heat resistant alloys: ○

SCMT

Designation	L mm	S mm	D1 mm	IC mm
SCMT 09T3..	9.52	3.97	4.4	9.52
SCMT 1204..	12.70	4.76	5.5	12.70




SCMT

-M55
CTCM120**-M55**
CTCM130

ISO	RE mm	DRAGONSkin		DRAGONSkin	
		M SCMT	NEW 1A/08 Article no. 75 216 ... £ 8.82 10600	M SCMT	NEW 1A/08 Article no. 75 216 ... £ 8.82 30600
09T308EN	0.8				
120408EN	0.8				
Steel		○	○	●	●
Stainless steel					
Cast iron					
Non ferrous metals					
Heat resistant alloys					

VCMT

Designation	L mm	S mm	D1 mm	IC mm
VCMT 1604..	16.6	4.76	4.4	9.52



VCMT

-M25
CTCM120-M25
CTCM130-M55
CTCM120-M55
CTCM130

DRAGOSKIN

DRAGOSKIN

DRAGOSKIN

DRAGOSKIN

F
VCMTNEW 1A/08
Article no.
75 219 ...
£F
VCMTNEW 1A/08
Article no.
75 219 ...
£M
VCMTNEW 1A/08
Article no.
75 220 ...
£M
VCMTNEW 1A/08
Article no.
75 220 ...
£

ISO	RE mm	160404EN	160408EN	160404EN	160408EN
160404EN	0.4			14.55 12800	14.55 32800
160408EN	0.8			14.55 13000	14.55 33000

Steel



Stainless steel



Cast iron



Non ferrous metals



Heat resistant alloys



Cutting data approximate values

			F		M		
			DRAGONSkin	DRAGONSkin	DRAGONSkin	DRAGONSkin	
			CTCM120	CTCM130	CTCM120	CTCM130	
Index			v_c in m/min			v_c in m/min	
P	1.1	General construction steel	< 800 N/mm ²	160–265	110–200	145–240	100–180
	1.2	Free cutting steel	< 800 N/mm ²	160–265	110–200	145–240	100–180
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	160–265	110–200	145–240	100–180
	1.4	Alloyed hardened steel	< 1000 N/mm ²	160–265	110–200	145–240	100–180
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	160–265	110–200	145–240	100–180
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	160–265	110–200	145–240	100–180
	1.7	Tempering steel, alloyed	< 800 N/mm ²	160–265	110–200	145–240	100–180
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	160–265	110–200	145–240	100–180
	1.9	Steel castings	< 850 N/mm ²	160–265	110–200	145–240	100–180
	1.10	Nitriding steel	< 1000 N/mm ²	160–265	110–200	145–240	100–180
	1.11	Nitriding steel	< 1200 N/mm ²	160–265	110–200	145–240	100–180
	1.12	Roller bearing steel	< 1200 N/mm ²	160–265	110–200	145–240	100–180
	1.13	Spring steel	< 1200 N/mm ²	160–265	110–200	145–240	100–180
	1.14	High-speed steel	< 1300 N/mm ²	160–265	110–200	145–240	100–180
	1.15	Cold working tool steel	< 1300 N/mm ²	160–265	110–200	145–240	100–180
	1.16	Hot working tool steel	< 1300 N/mm ²	160–265	110–200	145–240	100–180
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	110–210	80–160	100–190	70–140
	2.2	Stainless steel, ferritic	< 750 N/mm ²	110–210	80–160	100–190	70–140
	2.3	Stainless steel, martensitic	< 900 N/mm ²	110–210	80–160	100–190	70–140
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	110–210	80–160	100–190	70–140
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	55–155	40–110	50–140	35–100
	2.6	Stainless steel, austenitic	< 750 N/mm ²	55–155	40–110	50–140	35–100
	2.7	Heat resistant steel	< 1100 N/mm ²	55–155	40–110	50–140	35–100
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²				
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²				
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²				
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²				
	3.5	White malleable cast iron	270–450 N/mm ²				
	3.6	White malleable cast iron	500–650 N/mm ²				
	3.7	Black malleable cast iron	300–450 N/mm ²				
	3.8	Black malleable cast iron	500–800 N/mm ²				
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²				
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²				
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²				
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²				
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²				
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²				
	4.7	Copper wrought alloys	< 700 N/mm ²				
	4.8	Special copper alloys	< 200 HB				
	4.9	Special copper alloys	< 300 HB				
	4.10	Special copper alloys	> 300 HB				
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²				
	4.12	Long-chipping brass	< 600 N/mm ²				
S	4.13	Thermoplastics					
	4.14	Duroplastics					
	4.15	Fibre-reinforced plastics					
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²				
	4.17	Graphite					
	4.18	Tungsten and tungsten alloys					
	4.19	Molybdenum and molybdenum alloys					
	5.1	Pure nickel					
	5.2	Nickel alloys					
	5.3	Nickel alloys	< 850 N/mm ²				
H	5.4	Nickel molybdenum alloys					
	5.5	Nickel-chromium alloys	< 1300 N/mm ²				
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²				
	5.7	Heat resistant alloys	< 1300 N/mm ²				
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²				
	5.9	Pure titanium	< 900 N/mm ²				
	5.10	Titanium alloys	< 700 N/mm ²				
	5.11	Titanium alloys	< 1200 N/mm ²				
	6.1		< 45 HRC				
	6.2		46–55 HRC				
	6.3	Tempered steel	56–60 HRC				
	6.4		61–65 HRC				
	6.5		65–70 HRC				

i The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Cutting data standard values for negative inserts


Designation	-F30						-M30						-M60					
	f			a _p			f			a _p			f			a _p		
	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.	min.	Recommended	max.
	mm/rev.			mm			mm/rev.			mm			mm/rev.			mm		
CN.. 090304																		
CN.. 090308																		
CN.. 120404	0,05	0,15	0,25	0,4	1,0	2,0												
CN.. 120408	0,10	0,22	0,35	0,8	1,5	2,5	0,15	0,25	0,40	1,0	2,0	4,5	0,25	0,30	0,50	1,5	2,5	6,0
CN.. 120412							0,20	0,30	0,50	1,2	2,5	5,0	0,30	0,35	0,55	2,0	3,0	6,0
CN.. 120416							0,25	0,35	0,55	1,6	2,5	5,0	0,30	0,40	0,60	2,0	3,0	6,0
CN.. 160608																		
CN.. 160612																		
CN.. 160616																		
CN.. 160624																		
CN.. 190608																		
CN.. 190612																		
CN.. 190616																		
CN.. 190624																		
CN.. 250924																		
																		
DN.. 110402																		
DN.. 110404	0,05	0,15	0,25	0,4	1,0	2,0												
DN.. 110408	0,10	0,20	0,35	0,8	1,5	2,5	0,15	0,25	0,40	1,0	2,0	4,5						
DN.. 110412							0,20	0,30	0,50	1,2	2,0	4,5						
DN.. 150404																		
DN.. 150408																		
DN.. 150412																		
DN.. 150416																		
DN.. 150604	0,05	0,15	0,25	0,4	1,0	2,0												
DN.. 150608	0,10	0,20	0,35	0,8	1,5	2,5	0,15	0,25	0,40	1,0	2,0	5,5	0,25	0,30	0,45	1,5	2,5	6,0
DN.. 150612							0,20	0,30	0,50	1,2	2,0	5,5	0,30	0,40	0,55	1,5	2,5	6,0
DN.. 150616																		
SN.. 090308																		
SN.. 120404	0,10	0,15	0,30	0,4	1,0	2,0												
SN.. 120408	0,15	0,20	0,40	0,8	1,5	2,5	0,20	0,25	0,45	1,0	2,0	4,5	0,30	0,35	0,50	1,5	2,0	6,0
SN.. 120412							0,25	0,30	0,50	1,2	2,0	5,0	0,30	0,40	0,55	2,0	2,5	6,0
SN.. 120416																0,30	0,40	0,60
SN.. 150608																		
SN.. 150612																		
SN.. 150616																		
SN.. 190612																		
SN.. 190616																		
SN.. 190624																		
SN.. 250724																		
SN.. 250924																		
																		
TN.. 110304																		
TN.. 110308																		
TN.. 160404	0,05	0,15	0,25	0,4	1,0	2,0												
TN.. 160408	0,10	0,15	0,35	0,8	1,5	2,5	0,15	0,25	0,40	1,0	2,0	4,5	0,25	0,25	0,45	1,5	2,5	5,0
TN.. 160412							0,20	0,30	0,50	1,2	2,0	4,5	0,30	0,30	0,55	2,0	2,5	5,5
TN.. 220404																		
TN.. 220408																		
TN.. 220412																		
TN.. 220416																		
																		
VN.. 160404	0,08	0,10	0,20	0,4	1,0	2,0												
VN.. 160408	0,10	0,15	0,30	0,8	1,5	2,5	0,15	0,25	0,40	1,0	1,5	4,0						
VN.. 160412																		
WN.. 060404	0,05	0,15	0,25	0,4	1,0	2,0												
WN.. 060408	0,10	0,20	0,30	0,8	1,5	2,5	0,15	0,25	0,40	1,0	1,5	3,5	0,25	0,30	0,45	1,5	2,0	4,0
WN.. 060412							0,20	0,30	0,45	1,2	1,5	4,0	0,30	0,35	0,50	2,0	2,5	4,5
																		
WN.. 080404	0,05	0,15	0,25	0,4	1,0	2,0												
WN.. 080408	0,10	0,20	0,35	0,8	1,5	2,5	0,15	0,25	0,40	1,0	2,0	4,5	0,25	0,30	0,50	1,5	2,0	5,0
WN.. 080412							0,20	0,30	0,50	1,2	2,0	5,0	0,30	0,35	0,55	2,0	2,5	5,5
WN.. 080416																		

Sharp 

 The data shows reference values. An adjustment to the actual conditions may be required.

Cutting data values for positive inserts

Designation	-M25						-M55					
	f			a _p			f			a _p		
	min.	Recom-mended	max.	min.	Recom-mended	max.	min.	Recom-mended	max.	min.	Recom-mended	max.
CC.. 060200												
CC.. 060201												
CC.. 060202												
CC.. 060204	0,06	0,13	0,20	0,2	1,1	2,0	0,06	0,13	0,20	0,4	1,5	2,6
CC.. 060208												
CC.. 09T300												
CC.. 09T301												
CC.. 09T302												
CC.. 09T304	0,06	0,14	0,22	0,2	1,2	2,2	0,08	0,16	0,24	0,4	1,7	3,0
CC.. 09T308	0,10	0,20	0,30	0,4	1,8	3,2	0,12	0,24	0,35	0,8	2,4	4,0
CC.. 09T312												
CC.. 120402												
CC.. 120404												
CC.. 120408												
CC.. 120412												
DC.. 0702005												
DC.. 070201												
DC.. 0702015												
DC.. 070202	0,04	0,09	0,13	0,1	0,9	1,6						
DC.. 070204	0,06	0,12	0,18	0,2	1,1	2,0	0,06	0,14	0,22	0,4	1,3	2,2
DC.. 070208							0,08	0,16	0,24	0,8	1,6	2,4
DC.. 11T3005												
DC.. 11T301												
DC.. 11T3015												
DC.. 11T302	0,04	0,10	0,16	0,1	1,1	2,0						
DC.. 11T304	0,06	0,14	0,22	0,2	1,2	2,2	0,08	0,16	0,24	0,4	1,7	3,0
DC.. 11T308	0,10	0,20	0,30	0,4	1,8	3,2	0,12	0,24	0,35	0,8	2,4	4,0
DC.. 11T312												
RC.. 0602MO												
RC.. 0803MO												
RC.. 1003MO												
RC.. 1204MO												
RC.. 1606MO												
RC.. 2006MO												
RC.. 2507MO												
SC.. 09T304												
SC.. 09T308												
SC.. 120408												
SC.. 120412												
TC.. 090204												
TC.. 110202												
TC.. 110204	0,06	0,13	0,20	0,2	1,2	2,2	0,06	0,14	0,22	0,4	1,4	2,4
TC.. 110208												
TC.. 16T302												
TC.. 16T304	0,06	0,14	0,22	0,2	1,6	3,0						
TC.. 16T308	0,10	0,20	0,30	0,4	1,9	3,4	0,12	0,24	0,35	0,8	2,6	4,4
TC.. 16T312												
TC.. 220408												
VC.. 1103005												
VC.. 110301												
VC.. 1103015												
VC.. 110302												
VC.. 110304												
VC.. 110308												
VC.. 160402												
VC.. 160404	0,06	0,13	0,20	0,2	1,2	2,2	0,08	0,14	0,20	0,4	1,7	3,0
VC.. 160408	0,10	0,15	0,25	0,4	1,4	3,0	0,12	0,21	0,30	0,8	2,1	3,4
VC.. 160412												
VC.. 220530												
WC.. 020102												
WC.. 020104												

Sharp 

 The data shows reference values. An adjustment to the actual conditions may be required.

Standard chip breakers / application notes

Negative	Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration		Geometry
					a_p mm	f mm	
-F30		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130		15°	CN.. DN.. SN.. TN.. VN.. WN..
		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130			
	F				0,08-2,5	0,10-0,35	
-M30		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130		15° 0,25	CN.. DN.. SN.. TN.. VN.. WN..
		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130			
	F				1,00-4,50	0,15-0,40	
	M						
-M60		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130		18° 0,3	CN.. DN.. SN.. TN.. WN..
		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130			
	M				1,50-6,00	0,25-0,50	
	R						
Positive							
-M25		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130		10° 0,1-0,15	CC.. DC.. TC.. VC..
		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130			
	F				0,40-3,20	0,10-0,30	
	M						
-M55		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130		16° 0,15-0,2	CC.. DC.. SC.. TC.. VC..
		CTCM120 / CTCM130	CTCM120 / CTCM130	CTCM120 / CTCM130			
	M				0,40-4,80	0,06-0,35	

Grade description

CTCM120

- ▲ Carbide, Al₂O₃-coated
- ▲ ISO | P15 | **M20**
- ▲ Wear-resistant stainless turning grade for optimum performance with a smooth cut

CTCM130


- ▲ Carbide, Al₂O₃-coated
- ▲ ISO | P25 | **M30**
- ▲ Tough stainless turning grade for rough machining with interrupted cut

Application tips for the machining of stainless steels

Machining the stainless steel material group cannot always be clearly assigned to one particular cutting material, particularly in the case of turning applications. Stainless steels are therefore classified into groups according to their chemical properties in order to assign a suitable cutting material.

In the current edition of DIN ISO 513, the microstructure of stainless steel is correlated with the special machining properties, which results in a classification into martensitic, ferritic and austenitic stainless steel. This is particularly significant in user groups ISO P and ISO M.


The correlation between the classification of stainless steels and the user groups for cutting materials is based on the following rule of thumb:

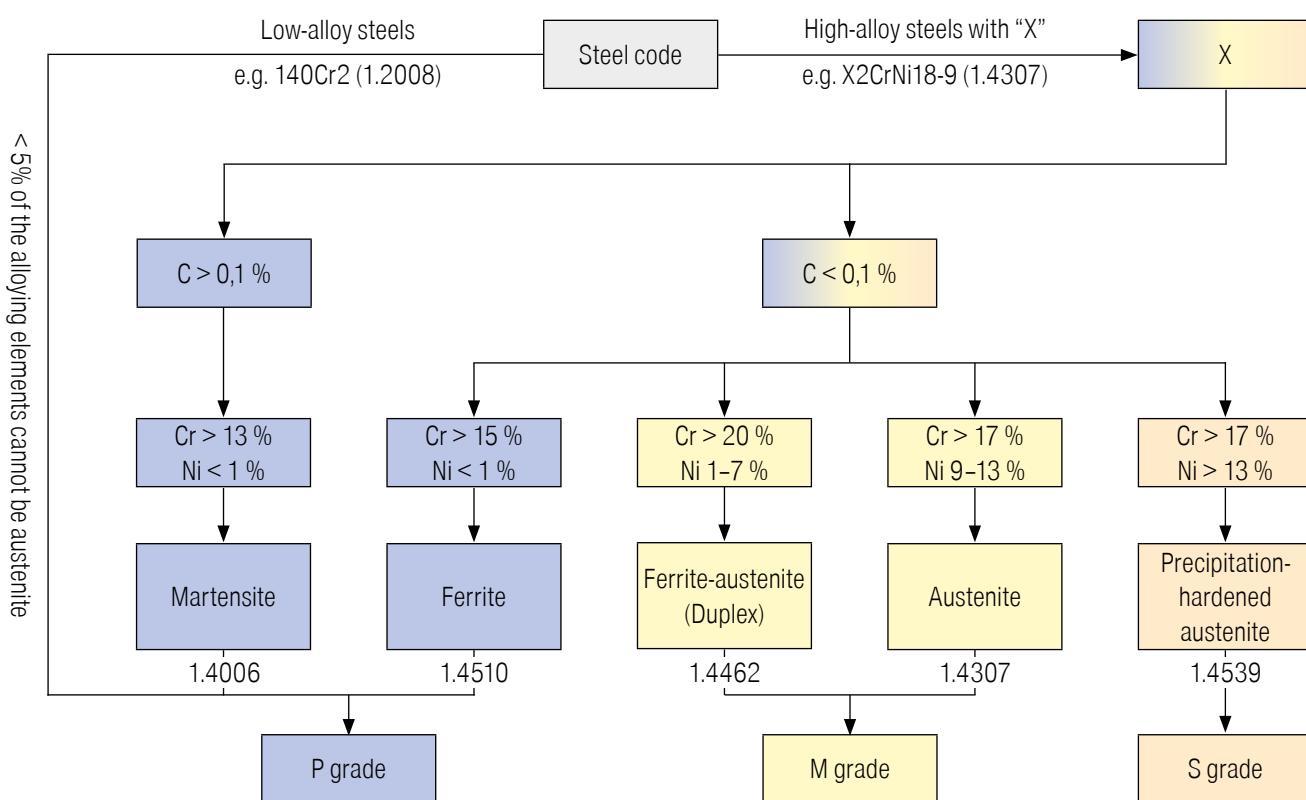

Material group	Code letter	Identification colour	Workpiece material
Steel	ISO P	Blue	All types of steel and cast steel, with the exception of stainless steel with austenitic structure
Stainless steel	ISO M	Yellow	Stainless austenitic and austenitic-ferritic steel and cast steel
Heat resistant alloys	ISO S	Orange (brown)	Heat-resistant special alloys based on iron, nickel and cobalt as well as titanium and titanium alloys

The Schaeffler diagram

By applying this information to the Schaeffler diagram, it is possible to clearly determine how the austenitic, ferritic and martensitic areas behave in relation to the chromium and nickel equivalents.

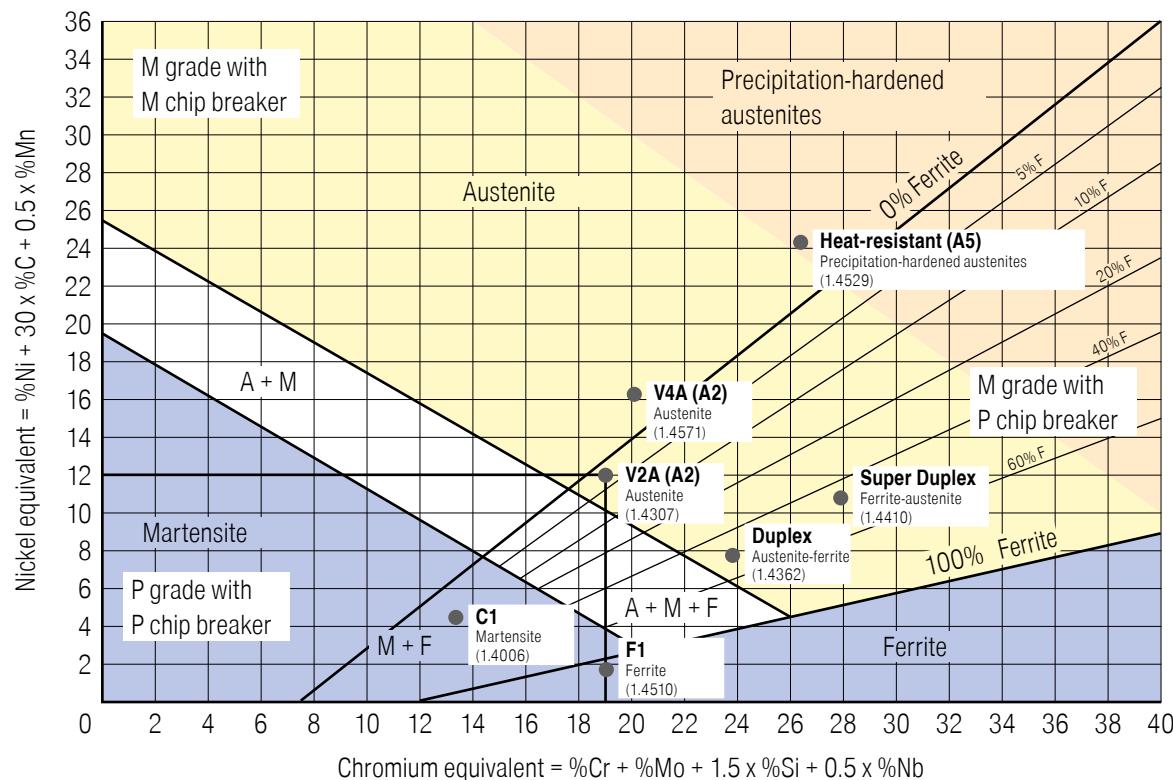

Example:

X2CrNi18-9 (1.4307) V2A

Alloying elements: C 0.02%; Cr 18%; Ni 9%; Mn 2%; Si 0.5%
Cr equivalent ~19%; Ni equivalent ~ 12%

→ Austenite → ISO M grade → M chip breaker

The Schaeffler diagram shows an overview of the limits of the respective microstructures with coloured areas in accordance with DIN ISO 513. The rule of thumb for classifying stainless steels can be used to quickly gain a rough overview of the cutting material grades required. The Schaeffler diagram refers to the structural components and only applies to extremely fast cooling during the production of steels as well as stainless steel. In reality, the steels are heat-treated, which changes the structure. Different cooling lubricant strategies must also be taken into account, as this has a significant impact on tool life and tool wear.

Table of contents

Overview of inserts	84
Indexable inserts, negative	85-88
Indexable inserts, positive	89-91
Technical Information	
Cutting Data	92
Chip Breaker Types and Grade Overview	93

CERATIZIT \ Standard

Quality tools for standard applications.

The quality tools of the **CERATIZIT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Overview of inserts


		Steel					Stainless steel					Cast iron					Non ferrous metals					Heat resistant					Geometry			
		P	M	K	N	S	CN..	DN..	VN..	WN..																				
Negative																														
Fine - Medium	-FMS		●	○	○			85		86																88				
Medium - Rough	-MRS		●	○	○			85		86																88				

		Steel					Stainless steel					Cast iron					Non ferrous metals					Heat resistant					Geometry			
		P	M	K	N	S	CC..	DC..	VC..																					
Positive																														
Fine - Medium	-FMS		●	○	○			89		90																91				
Medium - Rough	-MRS		●	○	○			89		90																91				

Matching tool holders and boring bars can be found in our main catalogue → **Chapter 9, Turning tools**

CNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
CNMG 1204..	12.9	4.76	5.16	12.70
CNMG 1606..	16.1	6.35	6.35	15.87
CNMG 1906..	19.3	6.35	7.94	19.05

**CNMG**

-FMS CT-P15 -FMS CT-P25 -MRS CT-P15 -MRS CT-P25 -MRS CT-P35




ISO	RE	F CNMG		F CNMG		M CNMG		M CNMG		M CNMG							
		NEW	1S/1N	Article no.	75 302 ...	£	NEW	1S/1N	Article no.	75 303 ...	£	NEW	1S/1N	Article no.	75 303 ...	£	
120404EN	0.4			3.11	02809	3.11		12809									
120408EN	0.8			3.11	03009	3.11		13009		3.11	03009	3.11		13009		3.11	23009
120412EN	1.2			3.11	03209	3.11		13209		3.11	03209	3.11		13209		3.11	23209
120416EN	1.6									3.11	03409	3.11		13409		3.11	23409
160612EN	1.2									4.55	04409	4.55		14409		4.55	24409
160616EN	1.6									4.55	04609	4.55		14609		4.55	24609
190612EN	1.2									6.77	05609	6.77		15609		6.77	25609
190616EN	1.6									6.77	05809	6.77		15809		6.77	25809

Steel	●	●	●	●	●
Stainless steel	○	○	○	○	○
Cast iron	○	○	○	○	○
Non ferrous metals					
Heat resistant alloys					○

DNMG

Designation	L mm	S mm	D1 mm	IC mm
DNMG 1506..	15.5	6.35	5.16	12.7



DNMG

-FMS CT-P15	-FMS CT-P25	-MRS CT-P15	-MRS CT-P25	-MRS CT-P35
----------------	----------------	----------------	----------------	----------------




F DNMG	F DNMG	M DNMG	M DNMG	M DNMG
NEW 1S/1N Article no. 75 306 ...	NEW 1S/1N Article no. 75 306 ...	NEW 1S/1N Article no. 75 307 ...	NEW 1S/1N Article no. 75 307 ...	NEW 1S/1N Article no. 75 307 ...

ISO	RE mm	£	£	£	£	£
150604EN	0.4	4.20 02809	4.20 12809			
150608EN	0.8	4.20 03009	4.20 13009	4.20 03009	4.20 13009	4.20 23009
150612EN	1.2	4.20 03209	4.20 13209	4.20 03209	4.20 13209	4.20 23209
150616EN	1.6			4.20 03409	4.20 13409	4.20 23409

Steel	●	●	●	●	●
Stainless steel	○	○	○	○	○
Cast iron	○	○	○	○	○
Non ferrous metals					
Heat resistant alloys					○

VNMG

Designation	L mm	S mm	D1 mm	IC mm
VNMG 1604..	16.6	4.76	3.81	9.52

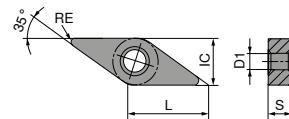

VNMG

-FMS
CT-P15-FMS
CT-P25

F

VNMG

NEW 1S/1N

Article no.
75 310 ...

£

3.95 01609

F

VNMG

NEW 1S/1N

Article no.
75 310 ...

£

3.95 11609

3.95 01809

3.95 11809

ISO	RE mm
160404EN	0.4
160408EN	0.8

Steel



Stainless steel



Cast iron




Non ferrous metals



Heat resistant alloys


WNMG

Designation	L mm	S mm	D1 mm	IC mm
WNMG 0804..	8.6	4.76	5.16	12.7

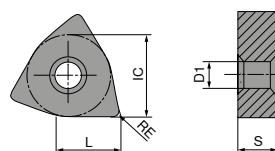

WNMG

-FMS CT-P15 -FMS CT-P25 -MRS CT-P15 -MRS CT-P25 -MRS CT-P35

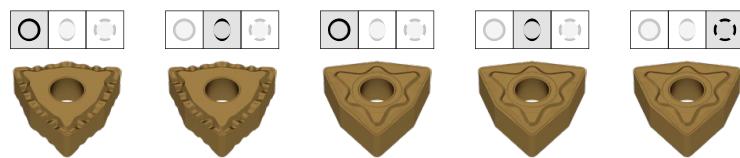


ISO	RE mm	F WNMG NEW 1S/1N Article no. 75 311 ...	F WNMG NEW 1S/1N Article no. 75 311 ...	M WNMG NEW 1S/1N Article no. 75 312 ...	M WNMG NEW 1S/1N Article no. 75 312 ...	M WNMG NEW 1S/1N Article no. 75 312 ...
		£	£	£	£	£
080404EN	0.4	3.66 01609	3.66 11609			
080408EN	0.8	3.66 01809	3.66 11809	3.66 01809	3.66 11809	3.66 21809
080412EN	1.2	3.66 02009	3.66 12009	3.66 02009	3.66 12009	3.66 22009

Steel	●	●	●	●	●
Stainless steel	○	○	○	○	○
Cast iron	○	○	○	○	○
Non ferrous metals					
Heat resistant alloys					○


CCMT

Designation	L mm	S mm	D1 mm	IC mm
CCMT 09T3..	9.7	3.97	4.4	9.52
CCMT 1204..	12.9	4.76	5.5	12.70



CCMT

-FMS CT-P15 -FMS CT-P25 -MRS CT-P15 -MRS CT-P25

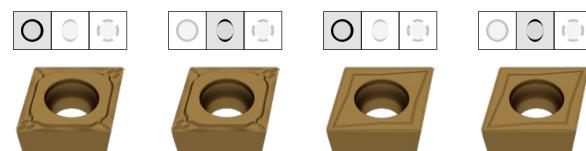


F CCMT F CCMT M CCMT M CCMT

NEW Article no. 75 300 ... £	NEW Article no. 75 300 ... £	NEW Article no. 75 301 ... £	NEW Article no. 75 301 ... £
2.26 01609	2.26 11609	2.26 01609	2.26 11609
2.26 01809	2.26 11809	2.26 01809	2.26 11809
3.03 02809	3.03 12809	3.03 02809	3.03 12809
3.03 03009	3.03 13009	3.03 03009	3.03 13009
3.03 03209		3.03 03209	3.03 13209




ISO	RE mm	Steel	Stainless steel	Cast iron	Non ferrous metals	Heat resistant alloys
09T304EN	0.4	●	○	●	●	●
09T308EN	0.8	○	○	○	○	○
120404EN	0.4					
120408EN	0.8					
120412EN	1.2					

DCMT

Designation	L mm	S mm	D1 mm	IC mm
DCMT 0702..	7.75	2.38	2.8	6.35
DCMT 11T3..	11.60	3.97	4.4	9.52

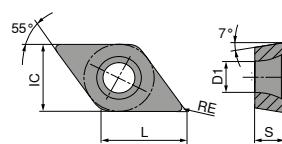

DCMT

-FMS
CT-P15-FMS
CT-P25-MRS
CT-P15-MRS
CT-P25

F DCMT

NEW 1S/1P

Article no.

75 304 ...

£

F DCMT

NEW 1S/1P

Article no.

75 304 ...

£

M DCMT

NEW 1S/1P

Article no.

75 305 ...

£

M DCMT

NEW 1S/1P

Article no.

75 305 ...

£

ISO RE

mm

070204EN	0.4	1.98	00409	1.98	10409	1.98	00409	1.98	10409
070208EN	0.8	1.98	00609	1.98	10609	1.98	00609	1.98	10609
11T304EN	0.4	2.49	01609	2.49	11609	2.49	01609	2.49	11609
11T308EN	0.8	2.49	01809	2.49	11809	2.49	01809	2.49	11809

Steel



Stainless steel



Cast iron




Non ferrous metals

Heat resistant alloys

Heat resistant alloys

VCMT

Designation	L mm	S mm	D1 mm	IC mm
VCMT 1103..	11.1	3.18	2.9	6.35
VCMT 1604..	16.6	4.76	4.4	9.52

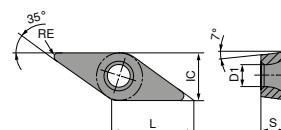

VCMT

-FMS
CT-P15-FMS
CT-P25-MRS
CT-P15-MRS
CT-P25

F VCMT	F VCMT	M VCMT	M VCMT
NEW 1S/1P	NEW 1S/1P	NEW 1S/1P	NEW 1S/1P
Article no. 75 308 ...	Article no. 75 308 ...	Article no. 75 309 ...	Article no. 75 309 ...
£ 3.83 01609	£ 3.83 11609	£ 3.87 02809	£ 3.87 12809
		£ 3.87 03009	£ 3.87 13009




ISO	RE mm	Steel	●	●	●	●
110304EN	0.4					
160404EN	0.4					
160408EN	0.8					
Steel		●	●	●	●	
Stainless steel		○	○	○	○	
Cast iron		○	○	○	○	
Non ferrous metals						
Heat resistant alloys						



Cutting data approximate values

			F			M			
			CT-P15	CT-P25	CT-P35	CT-P15	CT-P25	CT-P35	
			v_c in m/min			v_c in m/min			
P	1.1	General construction steel	< 800 N/mm ²	260–310	210–250	180–210	250–300	200–240	170–200
	1.2	Free cutting steel	< 800 N/mm ²	270–320	230–260	190–230	260–310	230–260	180–220
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	200–310	230–270	170–200	220–300	240–270	160–200
	1.4	Alloyed hardened steel	< 1000 N/mm ²	240–280	200–250	180–210	240–290	190–230	160–190
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	230–270	210–240	160–190	230–280	200–230	150–180
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	200–240	200–230	180–210	210–260	190–220	160–200
	1.7	Tempering steel, alloyed	< 800 N/mm ²	240–280	220–260	170–200	230–270	200–250	160–180
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	200–240	190–220	150–180	190–240	180–210	130–150
	1.9	Steel castings	< 850 N/mm ²	210–270	170–210	170–190	200–250	160–190	150–170
	1.10	Nitriding steel	< 1000 N/mm ²	210–250	180–220	150–180	190–230	180–210	140–170
	1.11	Nitriding steel	< 1200 N/mm ²	200–240	170–210	140–170	180–240	180–220	130–160
	1.12	Roller bearing steel	< 1200 N/mm ²	210–270	210–250	160–180	200–250	200–240	150–180
	1.13	Spring steel	< 1200 N/mm ²	180–230	170–210	150–180	180–220	170–210	130–160
	1.14	High-speed steel	< 1300 N/mm ²	180–220	180–210	130–160	170–210	160–190	120–140
	1.15	Cold working tool steel	< 1300 N/mm ²	160–200	150–200	120–150	160–200	140–190	110–130
	1.16	Hot working tool steel	< 1300 N/mm ²	150–210	140–190	130–160	130–180	130–200	110–130
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	200–250	200–250	160–190	200–250	210–260	150–190
	2.2	Stainless steel, ferritic	< 750 N/mm ²	200–250	200–250	160–180	200–250	200–260	150–170
	2.3	Stainless steel, martensitic	< 900 N/mm ²	190–230	190–230	140–170	190–230	190–240	120–150
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	180–220	190–220	120–180	180–220	190–220	110–170
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²			100–140			90–130
	2.6	Stainless steel, austenitic	< 750 N/mm ²			60–80			60–75
	2.7	Heat resistant steel	< 1100 N/mm ²			60–80			60–75
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	220–250	200–240		140–200	120–190	
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	200–240	190–220		160–210	150–180	
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	170–220	170–210		150–1910	150–180	
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	180–230	140–170		140–180	130–170	
	3.5	White malleable cast iron	270–450 N/mm ²	260–300	240–270		190–240	160–210	
	3.6	White malleable cast iron	500–650 N/mm ²	210–280	180–250		180–220	150–190	
	3.7	Black malleable cast iron	300–450 N/mm ²	240–290	240–270		180–250	160–210	
	3.8	Black malleable cast iron	500–800 N/mm ²	210–280	180–250		170–220	150–190	
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²						
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²						
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²						
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²						
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²						
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²						
	4.7	Copper wrought alloys	< 700 N/mm ²						
	4.8	Special copper alloys	< 200 HB						
	4.9	Special copper alloys	< 300 HB						
	4.10	Special copper alloys	> 300 HB						
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²						
	4.12	Long-chipping brass	< 600 N/mm ²						
S	4.13	Thermoplastics							
	4.14	Duroplastics							
	4.15	Fibre-reinforced plastics							
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²						
	4.17	Graphite							
	4.18	Tungsten and tungsten alloys							
	4.19	Molybdenum and molybdenum alloys							
	5.1	Pure nickel						20–35	
	5.2	Nickel alloys						20–35	
	5.3	Nickel alloys	< 850 N/mm ²					8–20	
H	5.4	Nickel molybdenum alloys						8–20	
	5.5	Nickel-chromium alloys	< 1300 N/mm ²					4–12	
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²					4–12	
	5.7	Heat resistant alloys	< 1300 N/mm ²					4–12	
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²					4–10	
	5.9	Pure titanium	< 900 N/mm ²					80–100	
	5.10	Titanium alloys	< 700 N/mm ²					15–30	
	5.11	Titanium alloys	< 1200 N/mm ²					15–30	
	6.1		< 45 HRC						
	6.2		46–55 HRC						
	6.3	Tempered steel	56–60 HRC						
	6.4		61–65 HRC						
	6.5		65–70 HRC						

i The cutting data depends extremely on the external conditions, e.g. stability of the tool and tool clamping, material and machine type.
The indicated values are possible cutting data which have to be increased or reduced according to the application conditions.

Standard chip breakers / application notes

Negative	Model	Smooth cut	Irregular cutting depth	Interrupted cut	Sectional illustration		Geometry
					a_p mm	f mm	
-FMS		CT-P15 / CT-P25	CT-P15 / CT-P25	CT-P25		0,15	CN.. DN.. VN.. WN..
		CT-P15 / CT-P25	CT-P25		0,40–3,00	0,10–0,30	
		CT-P15 / CT-P25	CT-P15 / CT-P25				
-MRS		CT-P15 / CT-P25 / CT-P35	CT-P15 / CT-P25 / CT-P35	CT-P25 / CT-P35		0,2	CN.. DN.. WN..
		CT-P15 / CT-P25	CT-P25 / CT-P35	CT-P35	0,50–4,50	0,20–0,60	
		CT-P15 / CT-P25	CT-P15 / CT-P25 / CT-P35	CT-P25 / CT-P35			

Positive							
-FMS		CT-P15 / CT-P25	CT-P15 / CT-P25	CT-P25		0,10–2,00	0,05–0,20
		CT-P15 / CT-P25	CT-P15 / CT-P25				
		CT-P15 / CT-P25	CT-P25				
-MRS		CT-P15 / CT-P25	CT-P15 / CT-P25	CT-P15 / CT-P25		0,1	CC.. DC.. VC..
		CT-P15 / CT-P25	CT-P15 / CT-P25	CT-P25	0,15–3,50	0,15–0,35	
		CT-P15 / CT-P25	CT-P15 / CT-P25	CT-P25			

Grade description

CT-P15

- ▲ Carbide, coated
- ▲ ISO | **P15** | M10 | K25
- ▲ Wear-resistant standard steel grade for smooth cut

CT-P25


- ▲ Carbide, coated
- ▲ ISO | **P25** | M20 | K30
- ▲ Standard steel grade for universal steel machining

CT-P35

- ▲ Carbide, coated
- ▲ ISO | **P35** | M25
- ▲ Tough standard steel grade for interrupted cutting

MonsterMill – Plunge milling cutter with corner radius

- ▲ suitable for trochoidal milling
- ▲ Chip breaker 0.9 x DC

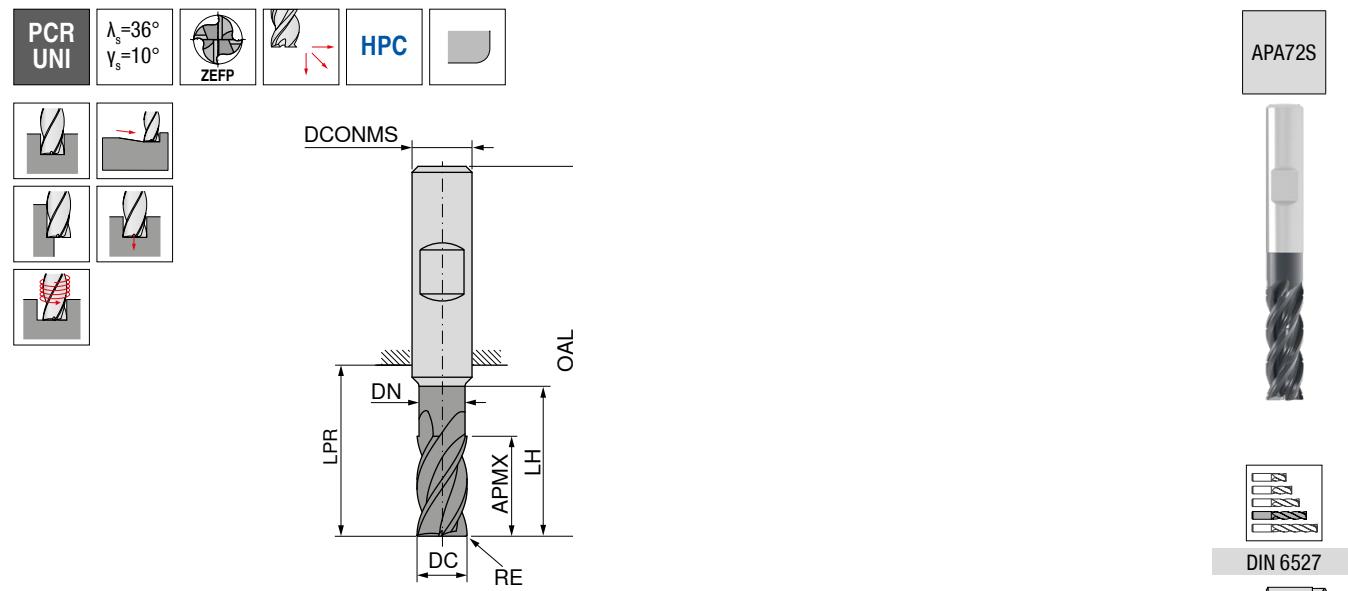



DC _{r8}	RE _{±0,03}	APMX	DN	LH	LPR	OAL	DCONMS _{h6}	ZEFP	£	Article no.
mm	mm	mm	mm	mm	mm	mm	mm			
5	0.20	17	4.8	24	26	62	6	4	68.10	05202
6	0.20	17	5.8	25	26	62	6	4	68.10	06202
8	0.20	24	7.7	30	32	68	8	4	90.63	08202
10	0.32	30	9.7	35	40	80	10	4	105.83	10203
12	0.32	36	11.6	45	48	93	12	4	143.00	12203
14	0.32	42	13.6	50	54	99	14	4	181.00	14203
16	0.32	48	15.5	56	60	108	16	4	243.75	16203
18	0.32	54	17.5	67	69	117	18	4	298.13	18203
20	0.50	60	19.5	70	76	126	20	4	400.50	20205

Steel	●
Stainless steel	○
Cast iron	●
Non ferrous metals	
Heat resistant alloys	
Hardened materials	

→ v_c/f_z Page 97-100

MonsterMill – Plunge milling cutter with corner radius

- ▲ suitable for trochoidal milling
- ▲ Chip breaker 0.9 x DC

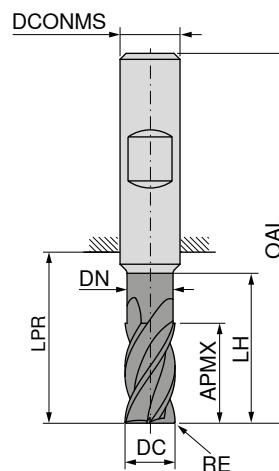

DRAGONSKIN



DIN 6527



NEW V1

Article no.
52 618 ...

75.71 05202
75.71 06202
99.40 08202
115.76 10203
156.38 12203
198.75 14203
263.13 16203
328.88 18203
427.38 20205

DC _{r8}	RE _{±0,03}	APMX	DN	LH	LPR	OAL	DCONMS _{H6}	ZEFP
mm	mm	mm	mm	mm	mm	mm		
5	0.20	17	4.8	24	26	62	6	4
6	0.20	18	5.8	25	26	62	6	4
8	0.20	24	7.7	30	32	68	8	4
10	0.32	30	9.7	35	40	80	10	4
12	0.32	36	11.6	45	48	93	12	4
14	0.32	42	13.6	50	54	99	14	4
16	0.32	48	15.5	56	60	108	16	4
18	0.32	54	17.5	67	69	117	18	4
20	0.50	60	19.5	70	76	126	20	4

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys

Hardened materials

→ v_c/f_z Page 101-104

Material examples referring to the cutting data tables

Index	Material	Strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation	Material number	Material designation
P	1.1 General construction steel	< 800 N/mm ²	1.0402	EN3B				
	1.2 Free cutting steel	< 800 N/mm ²	1.0711	EN1A				
	1.3 Hardened steel, non alloyed	< 800 N/mm ²	1.0401	EN32C				
	1.4 Alloyed hardened steel	< 1000 N/mm ²	1.7325	25 CD4				
	1.5 Tempering steel, unalloyed	< 850 N/mm ²	1.5752	EN36	1.0535	EN9		
	1.6 Tempering steel, unalloyed	< 1000 N/mm ²	1.6582	EN24				
	1.7 Tempering steel, alloyed	< 800 N/mm ²	1.7225	EN19				
	1.8 Tempering steel, alloyed	< 1300 N/mm ²	1.8515	EN40B				
	1.9 Steel castings	< 850 N/mm ²	0.9650	G-X 260 Cr 27	1.6750	GS-20 NiCrMo 3.7	1.6582	GS-34 CrNiMo 6
	1.10 Nitriding steel	< 1000 N/mm ²	1.8509	EN41B				
	1.11 Nitriding steel	< 1200 N/mm ²	1.1186	EN8	1.1160	EN14A		
	1.12 Roller bearing steel	< 1200 N/mm ²	1.3505	534A99				
	1.13 Spring steel	< 1200 N/mm ²		EN45		EN47		EN43
	1.14 High-speed steel	< 1300 N/mm ²	1.3343	M2	1.3249	M34		
	1.15 Cold working tool steel	< 1300 N/mm ²	1.2379	D2	1.2311	P20		
	1.16 Hot working tool steel	< 1300 N/mm ²	1.2344	H13				
M	2.1 Cast steel and sulphured stainless steel	< 850 N/mm ²	1.4581	318				
	2.2 Stainless steel, ferritic	< 750 N/mm ²	1.4000	403				
	2.3 Stainless steel, martensitic	< 900 N/mm ²	1.4057	EN57				
	2.4 Stainless steel, ferritic / martensitic	< 1100 N/mm ²	1.4028	EN56B				
	2.5 Stainless steel, austenitic / ferritic	< 850 N/mm ²	1.4542	17-4PH				
	2.6 Stainless steel, austenitic	< 750 N/mm ²	1.4305	303	1.4401	316	1.4301	304
	2.7 Heat resistant steel	< 1100 N/mm ²	1.4876	Incoloy 800				
K	3.1 Grey cast iron with lamellar graphite	100-350 N/mm ²	0.6015	Grade 150	0.6020	Grade 220	0.6025	Grade 260
	3.2 Grey cast iron with lamellar graphite	300-500 N/mm ²	0.6030	Grade 300	0.6035	Grade 350	0.6040	Grade 400
	3.3 Gray cast iron with spheroidal graphite	300-500 N/mm ²	0.7040	SG 400-12	0.7043	SG 370-17	0.7050	SG 500-7
	3.4 Gray cast iron with spheroidal graphite	500-900 N/mm ²	0.7060	SG 600-3	0.7070	SG 700-2	0.7080	SG 800-2
	3.5 White malleable cast iron	270-450 N/mm ²	0.8035	GTW-35	0.8045	GTW-45		
	3.6 White malleable cast iron	500-650 N/mm ²	0.8055	GTW-55	0.8065	GTW-65		
	3.7 Black malleable cast iron	300-450 N/mm ²	0.8135	GTS-35	0.8145	GTS-45		
	3.8 Black malleable cast iron	500-800 N/mm ²	0.8155	GTS-55	0.8170	GTS-70		
N	4.1 Aluminium (non alloyed, low alloyed)	< 350 N/mm ²	3.0255	1050 A	3.0275	1070 A	3.0285	1080 A (A8)
	4.2 Aluminium alloys < 0.5 % Si	< 500 N/mm ²	3.1325	2017 A (AU4G)	3.4335	7005 (AZ5G)	3.4365	7075 (AZ5GU)
	4.3 Aluminium alloy 0.5-10 % Si	< 400 N/mm ²	3.2315	A-G 51	3.2373	A-S9 G	3.2151	A-S 6 U4
	4.4 Aluminium alloys 10-15 % Si	< 400 N/mm ²	3.2581	A-S12	3.2583	A-S12 U		
	4.5 Aluminum alloys > 15 % Si	< 400 N/mm ²		A-S18	A-S17 U4			
	4.6 Copper (non alloyed, low alloyed)	< 350 N/mm ²	2.0040	Cu-c1	2.0060	Cu-a1	2.0090	Cu-b1
	4.7 Copper wrought alloys	< 700 N/mm ²	2.1247	Cub2 (Beryllium Copper)	2.0855	CuN2S (Nickel Copper)	2.1310	CU-Fe2P
	4.8 Special copper alloys	< 200 HB	2.0916	Cu-A5	2.1525	Cu-S3 M		Ampco 8 (Cu-A6Fe2)
	4.9 Special copper alloys	< 300 HB	2.0978	Cu-Al11 Fe5 Ni5		Ampco 18 (Cu-A10 Fe3)		
	4.10 Special copper alloys	> 300 HB	2.1247	Cu Be2		Ampco M4		
	4.11 Short-chipping brass, bronze, red bronze	< 600 N/mm ²	2.0331	Cu Zn36 Pb1,5	2.0380	Cu Zn39 Pb2 (Ms 56)	2.0410	Cu Zn44 Pb2
S	4.12 Long-chipping brass	< 600 N/mm ²	2.0335	Cu Zn 36 (Ms63)	2.1293	Cu Cr1 Zr		
	4.13 Thermoplastics		PE	PVC	PS	Polystyrene		Plexiglas
	4.14 Duroplastics		PF	Bakelite		Pertinax		
	4.15 Fibre-reinforced plastics			Carbon Fibre		Fibreglass		Aramid Fibre (Kevlar)
	4.16 Magnesium and magnesium alloys	< 850 N/mm ²	3.5812	Mg A7 Z1	3.5662	Mg A9	3.5105	Mg Tr 22 Zn 1
	4.17 Graphite			R8500X		R8650		Technograph 15
	4.18 Tungsten and tungsten alloys			W-Ni Fe (Densimet)		W-Ni Cu (Inermet)		Denal
	4.19 Molybdenum and molybdenum alloys			TZM		MHQ		Mo W
	5.1 Pure nickel		2.4066	Ni99 (Nickel 200)	2.4068	Lc Ni99 (Nickel 201)		
	5.2 Nickel alloys		1.3912	Fe-Ni36 (Invar)	1.3917	Fe-Ni42 (N42)	1.3922	Fe-Ni48 (N48)
H	5.3 Nickel alloys	< 850 N/mm ²	2.4375	Ni Cu30 Al (Monel K500)	2.4360	Ni Cu30Fe (Monel 400)	2.4668	
	5.4 Nickel-molybdenum alloys		2.4600	Ni Mo30Cr2 (Hastelloy B4)	2.4617	Ni Mo28 (Hastelloy B2)	2.4819	Ni Mo16Cr16 Hastell. C276
	5.5 Nickel-chromium alloys	< 1300 N/mm ²	2.4951	Ni Cr20TiAl (Nimonic 80A)	2.4858	Ni Cr21Mo (Inconel 825)	2.4856	Ni Cr22Mo9Nb Inconel 625
	5.6 Cobalt Chrome Alloys	< 1300 N/mm ²	2.4964	Co Cr20 W15 Ni10		Co Cr20 Ni16 Mo7		Co Cr28 Mo 6
	5.7 Heat resistant alloys	< 1300 N/mm ²	1.4718	Z45 C S 9-3	1.4747	Z80 CSN 20-02	1.4845	Z12 CN 25-20
	5.8 Nickel-cobalt-chromium alloys	< 1400 N/mm ²	2.4851	Ni Cr23Fe (Inconel 601)	2.4668	Ni Cr19NbMo (Inconel 718)	2.4602	Ni Cr21Mo14 Hastelloy C22
	5.9 Pure titanium	< 900 N/mm ²	3.7025	T35 (Titanium Grade 1)	3.7034	T40 (Titanium Grade 2)	3.7064	T60 (Titanium Grade 4)
	5.10 Titanium alloys	< 700 N/mm ²	T-A6-Nb7 (367)		T-A5-Sn2-Mo4-Cr4 (Ti17)		T-A3-V2,5 (Gr18)	
	5.11 Titanium alloys	< 1200 N/mm ²	3.7165	T-A6-V4 (Ta6V)		T-A4-3V-Mo2-Fe2 (SP700)		T-A5-Sn1-Zr1-V1-Mo (Gr32)
	6.1	< 45 HRC						
	6.2	46-55 HRC						
	6.3	Tempered steel	56-60 HRC					
	6.4		61-65 HRC					
	6.5		65-70 HRC					

Cutting data standard values – MonsterMill – End mills – PCR UNI

With an a_n of 1.5 x DC the f_z should be multiplied by 0.75.

Continued on next page

Cutting data standard values – MonsterMill – End mills – PCR UNI

Index	$\varnothing DC = 13,7\text{--}14,0\text{ mm}$			$\varnothing DC = 15,5\text{--}16,0\text{ mm}$			$\varnothing DC = 17,5\text{--}20,0\text{ mm}$			Ramping	Helical milling			Drilling	●	○	MMS	
	a_s 0,1-0,2	a_s 0,3-0,4	a_s 0,6-1,0	a_s 0,1-0,2	a_s 0,3-0,4	a_s 0,6-1,0	a_s 0,1-0,2	a_s 0,3-0,4	a_s 0,6-1,0	1,0 x DC	α_{Rmax}^*	Hole diameter		1,0 x DC	Emulsion	Compressed air		
	x DC	x DC	x DC	x DC	x DC	x DC	x DC	x DC	x DC			D _{min.} DC x 1,5	D _{max.} DC x 1,8	f _z Factor				
1.1	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.2	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.3	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.4	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.5	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.6	0,142	0,110	0,078	0,159	0,123	0,087	0,173	0,134	0,095	45°	0,75xD	25°	16°	0,8	○	●	○	
1.7	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.8	0,128	0,099	0,070	0,142	0,110	0,078	0,155	0,120	0,085	45°	0,75xD	25°	16°	0,7	●		○	
1.9	0,126	0,098	0,069	0,141	0,109	0,077	0,153	0,119	0,084	45°	0,75xD	25°	16°	0,7	●		○	
1.10	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	16°	0,9	○	●	○	
1.11	0,128	0,099	0,070	0,142	0,110	0,078	0,155	0,120	0,085	45°	0,75xD	25°	16°	0,8	●		○	
1.12	0,146	0,113	0,080	0,162	0,126	0,089	0,177	0,137	0,097	30°	0,5xD	18°	11°	0,8	○	●	○	
1.13	0,133	0,103	0,073	0,148	0,115	0,081	0,161	0,124	0,088	30°	0,5xD	18°	11°	0,7	●		○	
1.14	0,133	0,103	0,073	0,148	0,115	0,081	0,161	0,124	0,088	30°	0,5xD	18°	11°	0,7	●		○	
1.15	0,133	0,103	0,073	0,148	0,115	0,081	0,161	0,124	0,088	30°	0,5xD	18°	11°	0,7	●		○	
1.16	0,148	0,115	0,081	0,164	0,127	0,090	0,179	0,139	0,098	30°	0,5xD	18°	11°	0,7	○	●	○	
2.1	0,089	0,069	0,049	0,099	0,076	0,054	0,108	0,083	0,059	15°	0,5xD	18°	11°	●			○	
2.2	0,097	0,075	0,053	0,108	0,083	0,059	0,117	0,091	0,064	15°	0,5xD	18°	11°	●			○	
2.3	0,097	0,075	0,053	0,108	0,083	0,059	0,117	0,091	0,064	15°	0,5xD	18°	11°	●			○	
2.4	0,097	0,075	0,053	0,108	0,083	0,059	0,117	0,091	0,064	15°	0,5xD	18°	11°	●			○	
2.5	0,075	0,058	0,041	0,082	0,064	0,045	0,089	0,069	0,049	15°	0,5xD	18°	11°	●			○	
2.6	0,089	0,069	0,049	0,099	0,076	0,054	0,108	0,083	0,059	15°	0,5xD	18°	11°	●			○	
2.7	0,077	0,059	0,042	0,086	0,066	0,047	0,093	0,072	0,051	15°	0,5xD	18°	11°	●			○	
3.1	0,256	0,198	0,140	0,285	0,221	0,156	0,310	0,240	0,170	45°	0,75xD	25°	25°	0,8	○	●	○	
3.2	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○	
3.3	0,217	0,168	0,119	0,241	0,187	0,132	0,263	0,204	0,144	45°	0,75xD	25°	25°	0,8	○	●	○	
3.4	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○	
3.5	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○	
3.6	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	25°	0,8	○	●	○	
3.7	0,179	0,139	0,098	0,199	0,154	0,109	0,217	0,168	0,119	45°	0,75xD	25°	25°	0,8	○	●	○	
3.8	0,153	0,119	0,084	0,170	0,132	0,093	0,186	0,144	0,102	45°	0,75xD	25°	25°	0,8	○	●	○	
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6																		
4.7																		
4.8																		
4.9																		
4.10																		
4.11																		
4.12																		
4.13																		
4.14																		
4.15																		
4.16																		
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9																		
5.10																		
5.11																		
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		



* Width of cut per helical revolution



Cutting data for ramping and helical milling = 100 %

Multiply cutting data for drilling by the factor from the table

Cutting data standard values- MonsterMill – end mill – PCR UNI, trochoidal milling

Index	Type long v_c m/min	max. angle of engagement h_m	$\emptyset DC = 5\text{ mm}$			$\emptyset DC = 6\text{ mm}$			$\emptyset DC = 8\text{ mm}$			$\emptyset DC = 10\text{ mm}$			$\emptyset DC = 12\text{ mm}$			
			a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	
			f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm	f_z mm		
1.1	450	50°	0,100	0,080	0,060	0,033	0,120	0,096	0,072	0,040	0,160	0,128	0,096	0,053	0,200	0,160	0,120	0,066
1.2	450	50°	0,100	0,080	0,060	0,033	0,120	0,096	0,072	0,040	0,160	0,128	0,096	0,053	0,200	0,160	0,120	0,066
1.3	450	50°	0,100	0,080	0,060	0,033	0,120	0,096	0,072	0,040	0,160	0,128	0,096	0,053	0,200	0,160	0,120	0,066
1.4	410	45°	0,090	0,070	0,050	0,029	0,108	0,084	0,060	0,035	0,144	0,112	0,080	0,046	0,180	0,140	0,100	0,058
1.5	450	50°	0,100	0,080	0,060	0,033	0,120	0,096	0,072	0,040	0,160	0,128	0,096	0,053	0,200	0,160	0,120	0,066
1.6	390	45°	0,090	0,070	0,050	0,031	0,108	0,084	0,060	0,037	0,144	0,112	0,080	0,050	0,180	0,140	0,100	0,062
1.7	410	45°	0,090	0,070	0,050	0,029	0,108	0,084	0,060	0,035	0,144	0,112	0,080	0,046	0,180	0,140	0,100	0,058
1.8	330	40°	0,080	0,060	0,040	0,027	0,096	0,072	0,048	0,032	0,128	0,096	0,064	0,043	0,160	0,120	0,080	0,054
1.9	260	40°	0,090	0,070	0,050	0,027	0,108	0,084	0,060	0,032	0,144	0,112	0,080	0,043	0,180	0,140	0,100	0,054
1.10	410	45°	0,090	0,070	0,050	0,029	0,108	0,084	0,060	0,035	0,144	0,112	0,080	0,046	0,180	0,140	0,100	0,058
1.11	330	40°	0,080	0,060	0,040	0,027	0,096	0,072	0,048	0,032	0,128	0,096	0,064	0,043	0,160	0,120	0,080	0,054
1.12	295	40°	0,080	0,060	0,040	0,027	0,096	0,072	0,048	0,032	0,128	0,096	0,064	0,043	0,160	0,120	0,080	0,054
1.13	265	40°	0,070	0,050	0,030	0,026	0,084	0,060	0,036	0,031	0,112	0,080	0,048	0,042	0,140	0,100	0,060	0,052
1.14	265																	
1.15	265	40°	0,070	0,050	0,030	0,026	0,084	0,060	0,036	0,031	0,112	0,080	0,048	0,042	0,140	0,100	0,060	0,052
1.16	295	40°	0,080	0,060	0,040	0,027	0,096	0,072	0,048	0,032	0,128	0,096	0,064	0,043	0,160	0,120	0,080	0,054
2.1	180	35°	0,050	0,030		0,025	0,060	0,036		0,030	0,080	0,048		0,040	0,100	0,060		0,050
2.2	165	35°	0,060	0,040		0,027	0,072	0,048		0,032	0,096	0,064		0,043	0,120	0,080		0,054
2.3	165	35°	0,060	0,040		0,027	0,072	0,048		0,032	0,096	0,064		0,043	0,120	0,080		0,054
2.4	165	35°	0,060	0,040		0,027	0,072	0,048		0,032	0,096	0,064		0,043	0,120	0,080		0,054
2.5	145	35°	0,050	0,030		0,025	0,060	0,036		0,030	0,080	0,048		0,040	0,100	0,060		0,050
2.6	180	35°	0,050	0,030		0,025	0,060	0,036		0,030	0,080	0,048		0,040	0,100	0,060		0,050
2.7	150	35°	0,060	0,040		0,027	0,072	0,048		0,032	0,096	0,064		0,043	0,120	0,080		0,054
3.1	450	50°	0,130	0,115	0,100	0,033	0,156	0,138	0,120	0,040	0,208	0,184	0,160	0,053	0,260	0,230	0,200	0,066
3.2	370	50°	0,110	0,095	0,080	0,030	0,132	0,114	0,096	0,036	0,176	0,152	0,128	0,048	0,220	0,190	0,160	0,060
3.3	420	50°	0,120	0,105	0,090	0,032	0,144	0,126	0,108	0,038	0,192	0,168	0,144	0,051	0,240	0,210	0,180	0,064
3.4	370	50°	0,110	0,095	0,080	0,030	0,132	0,114	0,096	0,036	0,176	0,152	0,128	0,048	0,220	0,190	0,160	0,060
3.5	320	45°	0,110	0,095	0,080	0,030	0,132	0,114	0,096	0,036	0,176	0,152	0,128	0,048	0,220	0,190	0,160	0,060
3.6	275	45°	0,100	0,085	0,070	0,030	0,120	0,102	0,084	0,036	0,160	0,136	0,112	0,048	0,200	0,170	0,140	0,060
3.7	320	45°	0,110	0,095	0,080	0,030	0,132	0,114	0,096	0,036	0,176	0,152	0,128	0,048	0,220	0,190	0,160	0,060
3.8	275	45°	0,100	0,085	0,070	0,030	0,120	0,102	0,084	0,036	0,160	0,136	0,112	0,048	0,200	0,170	0,140	0,060
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6																		
4.7																		
4.8																		
4.9																		
4.10																		
4.11																		
4.12																		
4.13																		
4.14																		
4.15																		
4.16																		
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9																		
5.10																		
5.11																		
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		



Cutting depth corresponding to the cutting length

Continued on next page

Cutting data standard values- MonsterMill – end mill – PCR UNI, trochoidal milling

	Ø DC = 14 mm				Ø DC = 16 mm				Ø DC = 18 mm				Ø DC = 20 mm				● 1st choice		○ suitable	
	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	h_m	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	h_m	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	h_m	a_s 0,05 x DC	a_s 0,1 x DC	a_s 0,15 x DC	h_m	Emulsion	Compressed air	MMS	
	Index	f_z mm	f_z mm	f_z mm	h_m	f_z mm	f_z mm	h_m	f_z mm	f_z mm	f_z mm	h_m	f_z mm	f_z mm	f_z mm	h_m				
1.1	0,280	0,224	0,168	0,092	0,320	0,256	0,192	0,106	0,360	0,288	0,216	0,119	0,400	0,320	0,240	0,132	○	●	○	
1.2	0,280	0,224	0,168	0,092	0,320	0,256	0,192	0,106	0,360	0,288	0,216	0,119	0,400	0,320	0,240	0,132	○	●	○	
1.3	0,280	0,224	0,168	0,092	0,320	0,256	0,192	0,106	0,360	0,288	0,216	0,119	0,400	0,320	0,240	0,132	○	●	○	
1.4	0,252	0,196	0,140	0,081	0,288	0,224	0,160	0,093	0,324	0,252	0,180	0,104	0,360	0,280	0,200	0,116	○	●	○	
1.5	0,280	0,224	0,168	0,092	0,320	0,256	0,192	0,106	0,360	0,288	0,216	0,119	0,400	0,320	0,240	0,132	○	●	○	
1.6	0,252	0,196	0,140	0,087	0,288	0,224	0,160	0,099	0,324	0,252	0,180	0,112	0,360	0,280	0,200	0,124	○	●	○	
1.7	0,252	0,196	0,140	0,081	0,288	0,224	0,160	0,093	0,324	0,252	0,180	0,104	0,360	0,280	0,200	0,116	○	●	○	
1.8	0,224	0,168	0,112	0,076	0,256	0,192	0,128	0,086	0,288	0,216	0,144	0,097	0,320	0,240	0,160	0,108	○	●	○	
1.9	0,252	0,196	0,140	0,076	0,288	0,224	0,160	0,086	0,324	0,252	0,180	0,097	0,360	0,280	0,200	0,108	○	●	○	
1.10	0,252	0,196	0,140	0,081	0,288	0,224	0,160	0,093	0,324	0,252	0,180	0,104	0,360	0,280	0,200	0,116	○	●	○	
1.11	0,224	0,168	0,112	0,076	0,256	0,192	0,128	0,086	0,288	0,216	0,144	0,097	0,320	0,240	0,160	0,108	○	●	○	
1.12	0,224	0,168	0,112	0,076	0,256	0,192	0,128	0,086	0,288	0,216	0,144	0,097	0,320	0,240	0,160	0,108	○	●	○	
1.13	0,196	0,140	0,084	0,073	0,224	0,160	0,096	0,083	0,252	0,180	0,108	0,094	0,280	0,200	0,120	0,104	○	●	○	
1.14																				
1.15	0,196	0,140	0,084	0,073	0,224	0,160	0,096	0,083	0,252	0,180	0,108	0,094	0,280	0,200	0,120	0,104	○	●	○	
1.16	0,224	0,168	0,112	0,076	0,256	0,192	0,128	0,086	0,288	0,216	0,144	0,097	0,320	0,240	0,160	0,108	○	●	○	
2.1	0,140	0,084		0,070	0,160	0,096		0,080	0,180	0,108		0,090	0,200	0,120		0,100	●			
2.2	0,168	0,112		0,076	0,192	0,128		0,086	0,216	0,144		0,097	0,240	0,160		0,108	●			
2.3	0,168	0,112		0,076	0,192	0,128		0,086	0,216	0,144		0,097	0,240	0,160		0,108	●			
2.4	0,168	0,112		0,076	0,192	0,128		0,086	0,216	0,144		0,097	0,240	0,160		0,108	●			
2.5	0,140	0,084		0,070	0,160	0,096		0,080	0,180	0,108		0,090	0,200	0,120		0,100	●			
2.6	0,140	0,084		0,070	0,160	0,096		0,080	0,180	0,108		0,090	0,200	0,120		0,100	●			
2.7	0,168	0,112		0,076	0,192	0,128		0,086	0,216	0,144		0,097	0,240	0,160		0,108	●			
3.1	0,364	0,322	0,280	0,092	0,416	0,368	0,320	0,106	0,468	0,414	0,360	0,119	0,520	0,460	0,400	0,132	○	●	○	
3.2	0,308	0,266	0,224	0,084	0,352	0,304	0,256	0,096	0,396	0,342	0,288	0,108	0,440	0,380	0,320	0,120	○	●	○	
3.3	0,336	0,294	0,252	0,090	0,384	0,336	0,288	0,102	0,432	0,378	0,324	0,115	0,480	0,420	0,360	0,128	○	●	○	
3.4	0,308	0,266	0,224	0,084	0,352	0,304	0,256	0,096	0,396	0,342	0,288	0,108	0,440	0,380	0,320	0,120	○	●	○	
3.5	0,308	0,266	0,224	0,084	0,352	0,304	0,256	0,096	0,396	0,342	0,288	0,108	0,440	0,380	0,320	0,120	○	●	○	
3.6	0,280	0,238	0,196	0,084	0,320	0,272	0,224	0,096	0,360	0,306	0,252	0,108	0,400	0,340	0,280	0,120	○	●	○	
3.7	0,308	0,266	0,224	0,084	0,352	0,304	0,256	0,096	0,396	0,342	0,288	0,108	0,440	0,380	0,320	0,120	○	●	○	
3.8	0,280	0,238	0,196	0,084	0,320	0,272	0,224	0,096	0,360	0,306	0,252	0,108	0,400	0,340	0,280	0,120	○	●	○	
4.1																				
4.2																				
4.3																				
4.4																				
4.5																				
4.6																				
4.7																				
4.8																				
4.9																				
4.10																				
4.11																				
4.12																				
4.13																				
4.14																				
4.15																				
4.16																				
4.17																				
4.18																				
4.19																				
5.1																				
5.2																				
5.3																				
5.4																				
5.5																				
5.6																				
5.7																				
5.8																				
5.9																				
5.10																				
5.11																				
6.1																				
6.2																				
6.3																				
6.4																				
6.5																				

Cutting data standard values – MonsterMill – End mills – PCR ALU

Index	long	Ø DC = 5,0 mm			Ø DC = 5,7–7,0 mm			Ø DC = 7,7–8,0 mm			Ø DC = 8,7–10,0 mm			Ø DC = 11,7–12,0 mm			
		a_p			a_p			a_p			a_p			a_p			
		0,1–0,2 x DC	0,3–0,4 x DC	0,6–1,0 x DC	0,1–0,2 x DC	0,3–0,4 x DC	0,6–1,0 x DC	0,1–0,2 x DC	0,3–0,4 x DC	0,6–1,0 x DC	0,1–0,2 x DC	0,3–0,4 x DC	0,6–1,0 x DC	0,1–0,2 x DC	0,3–0,4 x DC	0,6–1,0 x DC	
1.1																	
1.2																	
1.3																	
1.4																	
1.5																	
1.6																	
1.7																	
1.8																	
1.9																	
1.10																	
1.11																	
1.12																	
1.13																	
1.14																	
1.15																	
1.16																	
2.1																	
2.2																	
2.3																	
2.4																	
2.5																	
2.6																	
2.7																	
3.1																	
3.2																	
3.3																	
3.4																	
3.5																	
3.6																	
3.7																	
3.8																	
4.1	700	1	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,130	0,097	0,065	0,140	0,104	0,070
4.2	700	1	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,130	0,097	0,065	0,140	0,104	0,070
4.3	420	1	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.4	420	1	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.5	280	1	0,070	0,052	0,035	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060	0,140	0,104	0,070
4.6	200	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.7	180	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.8	175	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.9	175	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.10	175	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.11	280	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.12	210	1	0,050	0,037	0,025	0,060	0,045	0,030	0,080	0,060	0,040	0,100	0,075	0,050	0,120	0,089	0,060
4.13																	
4.14																	
4.15																	
4.16	220	1	0,07	0,052	0,035	0,08	0,06	0,04	0,1	0,075	0,05	0,12	0,089	0,06	0,14	0,104	0,07
4.17																	
4.18																	
4.19																	
5.1																	
5.2																	
5.3																	
5.4																	
5.5																	
5.6																	
5.7																	
5.8																	
5.9																	
5.10																	
5.11																	
6.1																	
6.2																	
6.3																	
6.4																	
6.5																	

With an a_p of 1.5 x DC the f_z should be multiplied by 0.75.

Continued on next page

Index	$\emptyset DC = 13,7\text{--}14,0\text{ mm}$			$\emptyset DC = 15,5\text{--}16,0\text{ mm}$			$\emptyset DC = 17,5\text{--}18,0\text{ mm}$			$\emptyset DC = 19,5\text{--}20,0\text{ mm}$			Ramping	Helical milling			Drilling	● 1st choice	○ suitable
	a_p 0,1-0,2 $\times DC$	a_s 0,3-0,4 $\times DC$	a_e 0,6-1,0 $\times DC$	a_p 0,1-0,2 $\times DC$	a_s 0,3-0,4 $\times DC$	a_e 0,6-1,0 $\times DC$	a_p 0,1-0,2 $\times DC$	a_s 0,3-0,4 $\times DC$	a_e 0,6-1,0 $\times DC$	a_p 0,1-0,2 $\times DC$	a_s 0,3-0,4 $\times DC$	a_e 0,6-1,0 $\times DC$	1,0 $\times DC$	Hole diameter		1,0 $\times DC$			
	f_z mm			f_z mm			f_z mm			f_z mm			Max. plunging angle	$a_{Rmax.}^*$	$D_{min.}$ DC x 1,5	$D_{max.}$ DC x 1,8	v_c Factor	Emulsion	Compressed air
1.1																			
1.2																			
1.3																			
1.4																			
1.5																			
1.6																			
1.7																			
1.8																			
1.9																			
1.10																			
1.11																			
1.12																			
1.13																			
1.14																			
1.15																			
1.16																			
2.1																			
2.2																			
2.3																			
2.4																			
2.5																			
2.6																			
2.7																			
3.1																			
3.2																			
3.3																			
3.4																			
3.5																			
3.6																			
3.7																			
3.8																			
4.1	0,146	0,113	0,080	0,152	0,116	0,090	0,166	0,136	0,105	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,75	●	○
4.2	0,146	0,113	0,080	0,152	0,116	0,090	0,166	0,136	0,105	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,75	●	○
4.3	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	45°	0,75xD	25°	16°	0,75	●	○
4.4	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	45°	0,75xD	25°	16°	0,75	●	○
4.5	0,164	0,127	0,090	0,203	0,155	0,120	0,221	0,181	0,140	0,269	0,219	0,170	45°	0,75xD	25°	16°	0,7	●	○
4.6	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.7	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.8	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.9	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.10	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.11	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.12	0,128	0,099	0,070	0,135	0,103	0,080	0,158	0,129	0,100	0,190	0,155	0,120	45°	0,75xD	25°	16°	0,7	●	○
4.13																			
4.14																			
4.15																			
4.16	0,164	0,127	0,09	0,203	0,155	0,12	0,221	0,181	0,14	0,269	0,219	0,17	45°	0,75xD	25°	16°	0,7	●	○
4.17																			
4.18																			
4.19																			
5.1																			
5.2																			
5.3																			
5.4																			
5.5																			
5.6																			
5.7																			
5.8																			
5.9																			
5.10																			
5.11																			
6.1																			
6.2																			
6.3																			
6.4																			
6.5																			



* Width of cut per helical revolution



Cutting data for ramping and helical milling = 100 %

Multiply cutting data for drilling by the factor from the table

Cutting data standard values- MonsterMill – end mill – PCR ALU, trochoidal milling

Index	v _c m/min	long	max. angle of engagement	Ø DC = 5 mm			Ø DC = 6 mm			Ø DC = 8 mm			Ø DC = 10 mm			Ø DC = 12 mm		
				a _e 0,1 x DC	a _e 0,2 x DC	a _e 0,3 x DC	a _e 0,1 x DC	a _e 0,2 x DC	a _e 0,3 x DC	a _e 0,1 x DC	a _e 0,2 x DC	a _e 0,3 x DC	a _e 0,1 x DC	a _e 0,2 x DC	a _e 0,3 x DC	a _e 0,1 x DC	a _e 0,2 x DC	a _e 0,3 x DC
				f _t mm			f _t mm			f _t mm			f _t mm			f _t mm		
1.1																		
1.2																		
1.3																		
1.4																		
1.5																		
1.6																		
1.7																		
1.8																		
1.9																		
1.10																		
1.11																		
1.12																		
1.13																		
1.14																		
1.15																		
1.16																		
2.1																		
2.2																		
2.3																		
2.4																		
2.5																		
2.6																		
2.7																		
3.1																		
3.2																		
3.3																		
3.4																		
3.5																		
3.6																		
3.7																		
3.8																		
4.1	865	53°	0,070	0,040	0,055	0,084	0,048	0,066	0,112	0,064	0,088	0,140	0,080	0,110	0,168	0,096	0,132	
4.2	865	53°	0,070	0,040	0,055	0,084	0,048	0,066	0,112	0,064	0,088	0,140	0,080	0,110	0,168	0,096	0,132	
4.3	580	53°	0,075	0,045	0,070	0,090	0,054	0,084	0,120	0,072	0,112	0,150	0,090	0,140	0,180	0,108	0,168	
4.4	460	53°	0,060	0,040	0,055	0,072	0,048	0,066	0,096	0,064	0,088	0,120	0,080	0,110	0,144	0,096	0,132	
4.5	330	53°	0,055	0,040	0,050	0,066	0,048	0,060	0,088	0,064	0,080	0,110	0,080	0,100	0,132	0,096	0,120	
4.6	330	53°	0,042	0,030	0,040	0,050	0,036	0,048	0,067	0,048	0,064	0,084	0,060	0,080	0,101	0,072	0,096	
4.7	415	53°	0,028	0,020	0,024	0,033	0,024	0,029	0,044	0,032	0,038	0,055	0,040	0,048	0,066	0,048	0,058	
4.8	250	53°	0,045	0,030	0,040	0,054	0,036	0,048	0,072	0,048	0,064	0,090	0,060	0,080	0,108	0,072	0,096	
4.9	415	53°	0,028	0,020	0,024	0,033	0,024	0,029	0,044	0,032	0,038	0,055	0,040	0,048	0,066	0,048	0,058	
4.10	415	53°	0,028	0,020	0,024	0,033	0,024	0,029	0,044	0,032	0,038	0,055	0,040	0,048	0,066	0,048	0,058	
4.11	415	53°	0,028	0,020	0,024	0,033	0,024	0,029	0,044	0,032	0,038	0,055	0,040	0,048	0,066	0,048	0,058	
4.12	400	53°	0,028	0,020	0,024	0,033	0,024	0,029	0,044	0,032	0,038	0,055	0,040	0,048	0,066	0,048	0,058	
4.13																		
4.14																		
4.15																		
4.16	420	53°	0,028	0,020	0,024	0,033	0,024	0,029	0,044	0,032	0,038	0,055	0,040	0,048	0,066	0,048	0,058	
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9																		
5.10																		
5.11																		
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		



Cutting depth corresponding to the cutting length

Continued on next page

Cutting data standard values- MonsterMill – end mill – PCR ALU, trochoidal milling

Index	Ø DC = 14 mm				Ø DC = 16 mm				Ø DC = 18 mm				Ø DC = 20 mm				● 1st choice		○ suitable	
	a_e 0,1xDC	a_e 0,2xDC	a_e 0,3xDC	h_m	Emulsion	Compressed air	MMS													
	f_z mm				f_z mm				f_z mm				f_z mm							
1.1																				
1.2																				
1.3																				
1.4																				
1.5																				
1.6																				
1.7																				
1.8																				
1.9																				
1.10																				
1.11																				
1.12																				
1.13																				
1.14																				
1.15																				
1.16																				
2.1																				
2.2																				
2.3																				
2.4																				
2.5																				
2.6																				
2.7																				
3.1																				
3.2																				
3.3																				
3.4																				
3.5																				
3.6																				
3.7																				
3.8																				
4.1	0,196	0,112		0,154	0,224	0,128		0,176	0,252	0,144		0,198	0,280	0,160		0,220	●	○		
4.2	0,196	0,112		0,154	0,224	0,128		0,176	0,252	0,144		0,198	0,280	0,160		0,220	●	○		
4.3	0,210	0,126		0,196	0,240	0,144		0,224	0,270	0,162		0,252	0,300	0,180		0,280	●	○		
4.4	0,168	0,112		0,154	0,192	0,128		0,176	0,216	0,144		0,198	0,240	0,160		0,220	●	○		
4.5	0,154	0,112		0,140	0,176	0,128		0,160	0,198	0,144		0,180	0,220	0,160		0,200	●	○		
4.6	0,118	0,084		0,112	0,134	0,096		0,128	0,151	0,108		0,144	0,168	0,120		0,160	●	○		
4.7	0,077	0,056		0,067	0,088	0,064		0,077	0,099	0,072		0,086	0,110	0,080		0,096	●	○		
4.8	0,126	0,084		0,112	0,144	0,096		0,128	0,162	0,108		0,144	0,180	0,120		0,160	●	○		
4.9	0,077	0,056		0,067	0,088	0,064		0,077	0,099	0,072		0,086	0,110	0,080		0,096	●	○		
4.10	0,077	0,056		0,067	0,088	0,064		0,077	0,099	0,072		0,086	0,110	0,080		0,096	●	○		
4.11	0,077	0,056		0,067	0,088	0,064		0,077	0,099	0,072		0,086	0,110	0,080		0,096	●	○		
4.12	0,077	0,056		0,067	0,088	0,064		0,077	0,099	0,072		0,086	0,110	0,080		0,096	●	○		
4.13																				
4.14																				
4.15																				
4.16	0,077	0,056		0,067	0,088	0,064		0,077	0,099	0,072		0,086	0,110	0,080		0,096	●	○		
4.17																				
4.18																				
4.19																				
5.1																				
5.2																				
5.3																				
5.4																				
5.5																				
5.6																				
5.7																				
5.8																				
5.9																				
5.10																				
5.11																				
6.1																				
6.2																				
6.3																				
6.4																				
6.5																				






AUTOMOTIVE & MOTORS

Innovation drivers in machining:
Tool solutions for the mobility of tomorrow

Mini milling cutter

▲ Shank similar to DIN 6535

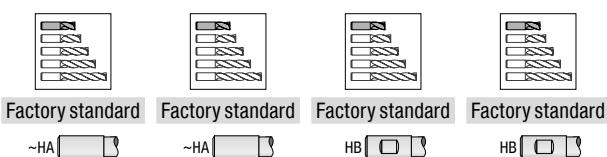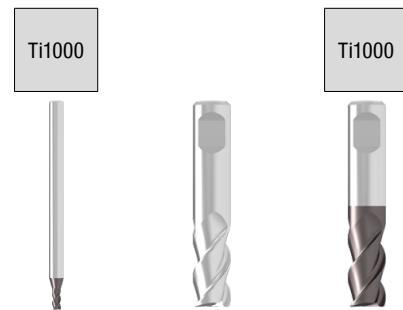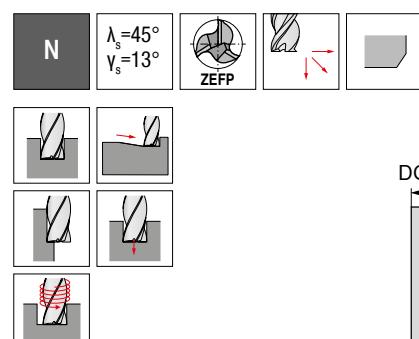

DC _{e8} mm	CHW mm	APMX mm	LPR mm	OAL mm	DCONMS _{h5} mm	ZEFP
0.50	0.05	1.5	17	45	3	3
1.00	0.05	2.0	12	45	6	3
1.00	0.05	2.0	17	45	3	3
1.20	0.05	2.0	12	45	6	3
1.20	0.05	3.0	17	45	3	3
1.50	0.05	3.0	12	45	6	3
1.50	0.05	3.0	17	45	3	3
1.80	0.05	3.0	12	45	6	3
1.80	0.05	3.0	17	45	3	3
2.00	0.05	4.0	13	45	6	3
2.50	0.05	6.0	13	45	6	3
2.80	0.05	6.0	13	45	6	3
3.00	0.10	6.0	13	45	6	3
3.50	0.10	7.0	13	45	6	3
3.80	0.10	7.0	13	45	6	3
4.00	0.10	7.0	12	45	6	3
4.50	0.10	8.0	11	45	6	3
4.80	0.10	8.0	11	45	6	3
5.00	0.10	8.0	11	45	6	3
5.50	0.10	8.0	9	45	6	3
5.75	0.10	8.0	9	45	6	3
6.00	0.10	8.0	9	45	6	3
6.70	0.10	10.0	19	55	8	3
7.00	0.10	12.0	19	55	8	3
7.70	0.10	12.0	19	55	8	3
8.00	0.10	13.0	19	55	8	3
8.70	0.10	14.0	17	55	10	3
9.00	0.10	16.0	17	55	10	3
9.70	0.10	16.0	17	55	10	3
10.00	0.10	16.0	17	55	10	3




NEW VO	Article no.	NEW VO	Article no.	NEW VO	Article no.	NEW VO	Article no.
	£		£		£		£
50 608 ...	17.49	30500	21.53	30500	17.63	01000	22.68
					01200	01200	
					01500	01500	
					01800	01800	
					02000	02000	
					02500	02500	
					02800	02800	
					03000	03000	
					03500	03500	
					03800	03800	
					04000	04000	
					04500	04500	
					04800	04800	
					05000	05000	
					05500	05500	
					05700	05700	
					06000	06000	
					06700	06700	
					07000	07000	
					07700	07700	
					08000	08000	
					08700	08700	
					09000	09000	
					09700	09700	
					10000	10000	

Steel	●	●
Stainless steel	●	●
Cast iron	●	●
Non ferrous metals	●	○
Heat resistant alloys	○	●
Hardened materials	○	●

→ v_c/f_z Page 108-112

Mini milling cutter

▲ Shank similar to DIN 6535

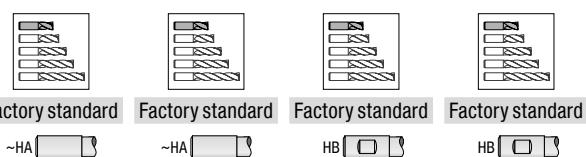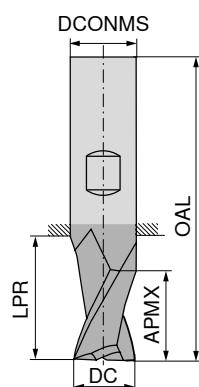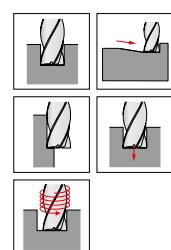

DC _{e8}	APMX	LPR	OAL	DCONMS _{h5}	ZEFP	NEW V0 Article no. 50 664 ... £	NEW V0 Article no. 50 691 ... £	NEW V0 Article no. 50 664 ... £	NEW V0 Article no. 50 691 ... £
mm	mm	mm	mm	mm					
0.50	1.5	17	45	3	3	17.90	30500	21.53	30500
1.00	2.0	12	45	6	3	17.90	31000	21.53	31000
1.00	2.0	17	45	3	3	17.90	31000	21.53	31000
1.20	2.0	12	45	6	3	17.37	31200	21.53	31200
1.20	3.0	17	45	3	3	17.37	31200	21.53	31200
1.50	3.0	12	45	6	3	17.90	31500	21.53	31500
1.50	3.0	17	45	3	3	17.90	31500	21.53	31500
1.80	3.0	12	45	6	3	17.37	31800	21.53	31800
1.80	3.0	17	45	3	3	17.37	31800	21.53	31800
2.00	4.0	13	45	6	3			17.83	02000
2.50	6.0	13	45	6	3			17.83	02500
2.80	6.0	13	45	6	3			17.83	02800
3.00	6.0	13	45	6	3			17.83	03000
3.50	7.0	13	45	6	3			18.63	03500
3.80	7.0	13	45	6	3			18.63	03800
4.00	7.0	12	45	6	3			18.63	04000
4.50	8.0	11	45	6	3			19.06	04500
4.80	8.0	11	45	6	3			19.06	04800
5.00	8.0	11	45	6	3			19.06	05000
5.50	8.0	9	45	6	3			19.06	05500
5.75	8.0	9	45	6	3			19.06	05700
6.00	8.0	9	45	6	3			19.06	06000
6.70	10.0	19	55	8	3			27.66	06700
7.00	12.0	19	55	8	3			27.66	07000
7.70	12.0	19	55	8	3			27.66	07700
8.00	13.0	19	55	8	3			27.66	08000
8.70	14.0	17	55	10	3			39.10	08700
9.00	16.0	17	55	10	3			39.10	09000
9.70	16.0	17	55	10	3			39.10	09700
10.00	16.0	17	55	10	3			39.10	10000

Steel	●	●
Stainless steel	●	●
Cast iron	●	●
Non ferrous metals	●	○
Heat resistant alloys	○	●
Hardened materials	○	●

→ v_c/f_z Page 108-112

Material examples referring to the cutting data tables

Index	Material	Strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation	Material number	Material designation
P	1.1 General construction steel	< 800 N/mm ²	1.0402	EN3B				
	1.2 Free cutting steel	< 800 N/mm ²	1.0711	EN1A				
	1.3 Hardened steel, non alloyed	< 800 N/mm ²	1.0401	EN32C				
	1.4 Alloyed hardened steel	< 1000 N/mm ²	1.7325	25 CD4				
	1.5 Tempering steel, unalloyed	< 850 N/mm ²	1.5752	EN36	1.0535	EN9		
	1.6 Tempering steel, unalloyed	< 1000 N/mm ²	1.6582	EN24				
	1.7 Tempering steel, alloyed	< 800 N/mm ²	1.7225	EN19				
	1.8 Tempering steel, alloyed	< 1300 N/mm ²	1.8515	EN40B				
	1.9 Steel castings	< 850 N/mm ²	0.9650	G-X 260 Cr 27	1.6750	GS-20 NiCrMo 3.7	1.6582	GS-34 CrNiMo 6
	1.10 Nitriding steel	< 1000 N/mm ²	1.8509	EN41B				
	1.11 Nitriding steel	< 1200 N/mm ²	1.1186	EN8	1.1160	EN14A		
	1.12 Roller bearing steel	< 1200 N/mm ²	1.3505	534A99				
	1.13 Spring steel	< 1200 N/mm ²		EN45		EN47		EN43
	1.14 High-speed steel	< 1300 N/mm ²	1.3343	M2	1.3249	M34		
	1.15 Cold working tool steel	< 1300 N/mm ²	1.2379	D2	1.2311	P20		
	1.16 Hot working tool steel	< 1300 N/mm ²	1.2344	H13				
M	2.1 Cast steel and sulphured stainless steel	< 850 N/mm ²	1.4581	318				
	2.2 Stainless steel, ferritic	< 750 N/mm ²	1.4000	403				
	2.3 Stainless steel, martensitic	< 900 N/mm ²	1.4057	EN57				
	2.4 Stainless steel, ferritic / martensitic	< 1100 N/mm ²	1.4028	EN56B				
	2.5 Stainless steel, austenitic / ferritic	< 850 N/mm ²	1.4542	17-4PH				
	2.6 Stainless steel, austenitic	< 750 N/mm ²	1.4305	303	1.4401	316	1.4301	304
	2.7 Heat resistant steel	< 1100 N/mm ²	1.4876	Incoloy 800				
K	3.1 Grey cast iron with lamellar graphite	100-350 N/mm ²	0.6015	Grade 150	0.6020	Grade 220	0.6025	Grade 260
	3.2 Grey cast iron with lamellar graphite	300-500 N/mm ²	0.6030	Grade 300	0.6035	Grade 350	0.6040	Grade 400
	3.3 Gray cast iron with spheroidal graphite	300-500 N/mm ²	0.7040	SG 400-12	0.7043	SG 370-17	0.7050	SG 500-7
	3.4 Gray cast iron with spheroidal graphite	500-900 N/mm ²	0.7060	SG 600-3	0.7070	SG 700-2	0.7080	SG 800-2
	3.5 White malleable cast iron	270-450 N/mm ²	0.8035	GTW-35	0.8045	GTW-45		
	3.6 White malleable cast iron	500-650 N/mm ²	0.8055	GTW-55	0.8065	GTW-65		
	3.7 Black malleable cast iron	300-450 N/mm ²	0.8135	GTS-35	0.8145	GTS-45		
	3.8 Black malleable cast iron	500-800 N/mm ²	0.8155	GTS-55	0.8170	GTS-70		
N	4.1 Aluminium (non alloyed, low alloyed)	< 350 N/mm ²	3.0255	1050 A	3.0275	1070 A	3.0285	1080 A (A8)
	4.2 Aluminium alloys < 0.5 % Si	< 500 N/mm ²	3.1325	2017 A (AU4G)	3.4335	7005 (AZ5G)	3.4365	7075 (AZ5GU)
	4.3 Aluminium alloy 0.5-10 % Si	< 400 N/mm ²	3.2315	A-G 51	3.2373	A-S9 G	3.2151	A-S 6 U4
	4.4 Aluminium alloys 10-15 % Si	< 400 N/mm ²	3.2581	A-S12	3.2583	A-S12 U		
	4.5 Aluminum alloys > 15 % Si	< 400 N/mm ²		A-S18	A-S17 U4			
	4.6 Copper (non alloyed, low alloyed)	< 350 N/mm ²	2.0040	Cu-c1	2.0060	Cu-a1	2.0090	Cu-b1
	4.7 Copper wrought alloys	< 700 N/mm ²	2.1247	Cub2 (Beryllium Copper)	2.0855	CuN2S (Nickel Copper)	2.1310	CU-Fe2P
	4.8 Special copper alloys	< 200 HB	2.0916	Cu-A5	2.1525	Cu-S3 M		Ampco 8 (Cu-A6Fe2)
	4.9 Special copper alloys	< 300 HB	2.0978	Cu-Al11 Fe5 Ni5		Ampco 18 (Cu-A10 Fe3)		
	4.10 Special copper alloys	> 300 HB	2.1247	Cu Be2		Ampco M4		
	4.11 Short-chipping brass, bronze, red bronze	< 600 N/mm ²	2.0331	Cu Zn36 Pb1,5	2.0380	Cu Zn39 Pb2 (Ms 56)	2.0410	Cu Zn44 Pb2
S	4.12 Long-chipping brass	< 600 N/mm ²	2.0335	Cu Zn 36 (Ms63)	2.1293	Cu Cr1 Zr		
	4.13 Thermoplastics		PE	PVC	PS	Polystyrene		Plexiglas
	4.14 Duroplastics		PF	Bakelite		Pertinax		
	4.15 Fibre-reinforced plastics			Carbon Fibre		Fibreglass		Aramid Fibre (Kevlar)
	4.16 Magnesium and magnesium alloys	< 850 N/mm ²	3.5812	Mg A7 Z1	3.5662	Mg A9	3.5105	Mg Tr 22 Zn 1
	4.17 Graphite			R8500X		R8650		Technograph 15
	4.18 Tungsten and tungsten alloys			W-Ni Fe (Densimet)		W-Ni Cu (Inermet)		Denal
	4.19 Molybdenum and molybdenum alloys			TZM		MHQ		Mo W
	5.1 Pure nickel		2.4066	Ni99 (Nickel 200)	2.4068	Lc Ni99 (Nickel 201)		
	5.2 Nickel alloys		1.3912	Fe-Ni36 (Invar)	1.3917	Fe-Ni42 (N42)	1.3922	Fe-Ni48 (N48)
H	5.3 Nickel alloys	< 850 N/mm ²	2.4375	Ni Cu30 Al (Monel K500)	2.4360	Ni Cu30Fe (Monel 400)	2.4668	
	5.4 Nickel-molybdenum alloys		2.4600	Ni Mo30Cr2 (Hastelloy B4)	2.4617	Ni Mo28 (Hastelloy B2)	2.4819	Ni Mo16Cr16 Hastell. C276
	5.5 Nickel-chromium alloys	< 1300 N/mm ²	2.4951	Ni Cr20TiAl (Nimonic 80A)	2.4858	Ni Cr21Mo (Inconel 825)	2.4856	Ni Cr22Mo9Nb Inconel 625
	5.6 Cobalt Chrome Alloys	< 1300 N/mm ²	2.4964	Co Cr20 W15 Ni10		Co Cr20 Ni16 Mo7		Co Cr28 Mo 6
	5.7 Heat resistant alloys	< 1300 N/mm ²	1.4718	Z45 C S 9-3	1.4747	Z80 CSN 20-02	1.4845	Z12 CN 25-20
	5.8 Nickel-cobalt-chromium alloys	< 1400 N/mm ²	2.4851	Ni Cr23Fe (Inconel 601)	2.4668	Ni Cr19NbMo (Inconel 718)	2.4602	Ni Cr21Mo14 Hastelloy C22
	5.9 Pure titanium	< 900 N/mm ²	3.7025	T35 (Titanium Grade 1)	3.7034	T40 (Titanium Grade 2)	3.7064	T60 (Titanium Grade 4)
	5.10 Titanium alloys	< 700 N/mm ²		T-A6-Nb7 (367)		T-A5-Sn2-Mo4-Cr4 (Ti17)		T-A3-V2,5 (Gr18)
	5.11 Titanium alloys	< 1200 N/mm ²	3.7165	T-A6-V4 (Ta6V)		T-A4-3V-Mo2-Fe2 (SP700)		T-A5-Sn1-Zr1-V1-Mo (Gr32)
	6.1	< 45 HRC						
	6.2	46-55 HRC						
	6.3	Tempered steel	56-60 HRC					
	6.4		61-65 HRC					
	6.5		65-70 HRC					

Cutting data standard values – mini milling cutter, uncoated

	Index	v _c m/min	a _{p max} x DC	Ø DC = 0,5 mm			Ø DC = 1,0 mm			Ø DC = 1,2 mm			Ø DC = 1,5 mm			Ø DC = 1,8–2,0 mm			Ø DC = 2,5–3,0 mm			
				a _p 0,1–0,2 x DC	a _p 0,3–0,4 x DC	a _p 0,6–1,0 x DC	a _p 0,1–0,2 x DC	a _p 0,3–0,4 x DC	a _p 0,6–1,0 x DC	a _p 0,1–0,2 x DC	a _p 0,3–0,4 x DC	a _p 0,6–1,0 x DC	a _p 0,1–0,2 x DC	a _p 0,3–0,4 x DC	a _p 0,6–1,0 x DC	a _p 0,1–0,2 x DC	a _p 0,3–0,4 x DC	a _p 0,6–1,0 x DC	a _p 0,1–0,2 x DC	a _p 0,3–0,4 x DC	a _p 0,6–1,0 x DC	
1.1																						
1.2																						
1.3																						
1.4																						
1.5																						
1.6																						
1.7																						
1.8																						
1.9																						
1.10																						
1.11																						
1.12																						
1.13																						
1.14																						
1.15																						
1.16																						
2.1																						
2.2																						
2.3																						
2.4																						
2.5																						
2.6																						
2.7																						
3.1																						
3.2																						
3.3																						
3.4																						
3.5																						
3.6																						
3.7																						
3.8																						
4.1	250	1xDC	0,007	0,005	0,004	0,011	0,007	0,006	0,015	0,009	0,007	0,019	0,012	0,009	0,025	0,016	0,012	0,039	0,026	0,019		
4.2	250	1xDC	0,007	0,005	0,004	0,011	0,007	0,006	0,015	0,009	0,007	0,019	0,012	0,009	0,025	0,016	0,012	0,039	0,026	0,019		
4.3	180	1xDC	0,007	0,005	0,004	0,011	0,007	0,006	0,017	0,011	0,008	0,021	0,014	0,010	0,027	0,018	0,013	0,039	0,026	0,019		
4.4	150	1xDC	0,007	0,005	0,004	0,011	0,007	0,006	0,017	0,011	0,008	0,021	0,014	0,010	0,027	0,018	0,013	0,039	0,026	0,019		
4.5	150	1xDC	0,007	0,005	0,004	0,011	0,007	0,006	0,017	0,011	0,008	0,021	0,014	0,010	0,027	0,018	0,013	0,039	0,026	0,019		
4.6	140	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.7	120	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.8	140	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.9	120	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.10	120	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.11	200	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.12	150	1xDC	0,004	0,003	0,002	0,007	0,005	0,004	0,010	0,007	0,005	0,015	0,009	0,007	0,021	0,014	0,010	0,031	0,020	0,015		
4.13																						
4.14																						
4.15																						
4.16	180	1xDC	0,007	0,005	0,004	0,011	0,007	0,006	0,017	0,011	0,008	0,021	0,014	0,010	0,027	0,018	0,013	0,039	0,026	0,019		
4.17																						
4.18																						
4.19																						
5.1																						
5.2																						
5.3																						
5.4																						
5.5																						
5.6																						
5.7																						
5.8																						
5.9	50	0,5xDC	0,003	0,002	0,002	0,005	0,003	0,003	0,006	0,004	0,003	0,007	0,005	0,004	0,010	0,007	0,005	0,016	0,010	0,008		
5.10	35	0,5xDC	0,003	0,002	0,002	0,005	0,003	0,003	0,006	0,004	0,003	0,007	0,005	0,004	0,010	0,007	0,005	0,016	0,010	0,008		
5.11	20	0,5xDC	0,003	0,002	0,002	0,005	0,003	0,003	0,006	0,004	0,003	0,007	0,005	0,004	0,010	0,007	0,005	0,016	0,010	0,008		
6.1																						
6.2																						
6.3																						
6.4																						
6.5																						

Continued on next page

Cutting data standard values – mini milling cutter, uncoated

Index	Ø DC = 3,5–4,0 mm			Ø DC = 4,5–5,0 mm			Ø DC = 5,5–6,0 mm			Ø DC = 6,7–8,0 mm			Ø DC = 8,7–10,0 mm			●	○	1st choice Emulsion Compressed air MMS
	a _x 0,1–0,2 x DC	a _y 0,3–0,4 x DC	a _z 0,6–1,0 x DC	a _x 0,1–0,2 x DC	a _y 0,3–0,4 x DC	a _z 0,6–1,0 x DC	a _x 0,1–0,2 x DC	a _y 0,3–0,4 x DC	a _z 0,6–1,0 x DC	a _x 0,1–0,2 x DC	a _y 0,3–0,4 x DC	a _z 0,6–1,0 x DC	a _x 0,1–0,2 x DC	a _y 0,3–0,4 x DC	a _z 0,6–1,0 x DC	●	○	
	f _z mm	f _z mm	f _z mm															
1.1																		
1.2																		
1.3																		
1.4																		
1.5																		
1.6																		
1.7																		
1.8																		
1.9																		
1.10																		
1.11																		
1.12																		
1.13																		
1.14																		
1.15																		
1.16																		
2.1																		
2.2																		
2.3																		
2.4																		
2.5																		
2.6																		
2.7																		
3.1																		
3.2																		
3.3																		
3.4																		
3.5																		
3.6																		
3.7																		
3.8																		
4.1	0,052	0,034	0,025	0,066	0,043	0,032	0,079	0,051	0,038	0,108	0,070	0,052	0,135	0,088	0,065	●	○	○
4.2	0,052	0,034	0,025	0,066	0,043	0,032	0,079	0,051	0,038	0,108	0,070	0,052	0,135	0,088	0,065	●	○	○
4.3	0,050	0,032	0,024	0,062	0,041	0,030	0,073	0,047	0,035	0,097	0,063	0,047	0,120	0,078	0,058	●	○	○
4.4	0,050	0,032	0,024	0,062	0,041	0,030	0,073	0,047	0,035	0,097	0,063	0,047	0,120	0,078	0,058	●	○	○
4.5	0,050	0,032	0,024	0,062	0,041	0,030	0,073	0,047	0,035	0,097	0,063	0,047	0,120	0,078	0,058	●	○	○
4.6	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.7	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.8	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.9	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.10	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.11	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.12	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	○
4.13																		
4.14																		
4.15																		
4.16	0,050	0,032	0,024	0,062	0,041	0,030	0,073	0,047	0,035	0,097	0,063	0,047	0,120	0,078	0,058	●	○	○
4.17																		
4.18																		
4.19																		
5.1																		
5.2																		
5.3																		
5.4																		
5.5																		
5.6																		
5.7																		
5.8																		
5.9	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	○
5.10	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	○
5.11	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	○
6.1																		
6.2																		
6.3																		
6.4																		
6.5																		

Cutting data standard values – mini milling cutter, coated

Continued on next page

Cutting data standard values – mini milling cutter, coated

Index	$\emptyset DC = 3,5\text{--}4,0 \text{ mm}$			$\emptyset DC = 4,5\text{--}5,0 \text{ mm}$			$\emptyset DC = 5,5\text{--}6,0 \text{ mm}$			$\emptyset DC = 6,7\text{--}8,0 \text{ mm}$			$\emptyset DC = 8,7\text{--}10,0 \text{ mm}$			●	○	
	a_x 0,1–0,2 $\times DC$	a_y 0,3–0,4 $\times DC$	a_z 0,6–1,0 $\times DC$	a_x 0,1–0,2 $\times DC$	a_y 0,3–0,4 $\times DC$	a_z 0,6–1,0 $\times DC$	a_x 0,1–0,2 $\times DC$	a_y 0,3–0,4 $\times DC$	a_z 0,6–1,0 $\times DC$	a_x 0,1–0,2 $\times DC$	a_y 0,3–0,4 $\times DC$	a_z 0,6–1,0 $\times DC$	a_x 0,1–0,2 $\times DC$	a_y 0,3–0,4 $\times DC$	a_z 0,6–1,0 $\times DC$	1st choice	suitable	
																Emulsion	Compressed air	MMS
f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm	f _z mm		
1.1	0,044	0,028	0,021	0,052	0,034	0,025	0,060	0,039	0,029	0,075	0,049	0,036	0,089	0,058	0,043	○	●	○
1.2	0,035	0,023	0,017	0,041	0,027	0,020	0,050	0,032	0,024	0,062	0,041	0,030	0,077	0,050	0,037	○	●	○
1.3	0,035	0,023	0,017	0,041	0,027	0,020	0,050	0,032	0,024	0,062	0,041	0,030	0,077	0,050	0,037	○	●	○
1.4	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.5	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.6	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.7	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.8	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.9	0,044	0,028	0,021	0,052	0,034	0,025	0,060	0,039	0,029	0,075	0,049	0,036	0,089	0,058	0,043	○	●	○
1.10	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.11	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.12	0,029	0,019	0,014	0,035	0,023	0,017	0,041	0,027	0,020	0,056	0,036	0,027	0,068	0,045	0,033	○	●	○
1.13																		
1.14																		
1.15																		
1.16																		
2.1	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
2.2	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
2.3	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
2.4	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
2.5	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
2.6	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
2.7	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
3.1	0,058	0,038	0,028	0,070	0,046	0,034	0,081	0,053	0,039	0,104	0,068	0,050	0,124	0,081	0,060	○	●	○
3.2	0,058	0,038	0,028	0,070	0,046	0,034	0,081	0,053	0,039	0,104	0,068	0,050	0,124	0,081	0,060	○	●	○
3.3	0,044	0,028	0,021	0,052	0,034	0,025	0,060	0,039	0,029	0,075	0,049	0,036	0,089	0,058	0,043	○	●	○
3.4	0,044	0,028	0,021	0,052	0,034	0,025	0,060	0,039	0,029	0,075	0,049	0,036	0,089	0,058	0,043	○	●	○
3.5	0,058	0,038	0,028	0,070	0,046	0,034	0,081	0,053	0,039	0,104	0,068	0,050	0,124	0,081	0,060	○	●	○
3.6	0,058	0,038	0,028	0,070	0,046	0,034	0,081	0,053	0,039	0,104	0,068	0,050	0,124	0,081	0,060	○	●	○
3.7	0,058	0,038	0,028	0,070	0,046	0,034	0,081	0,053	0,039	0,104	0,068	0,050	0,124	0,081	0,060	○	●	○
3.8	0,058	0,038	0,028	0,070	0,046	0,034	0,081	0,053	0,039	0,104	0,068	0,050	0,124	0,081	0,060	○	●	○
4.1																		
4.2																		
4.3																		
4.4																		
4.5																		
4.6	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.7	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.8	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.9	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.10	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.11	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.12	0,041	0,027	0,020	0,052	0,034	0,025	0,062	0,041	0,030	0,083	0,054	0,040	0,104	0,068	0,050	●	○	
4.13																		
4.14																		
4.15																		
4.16																		
4.17																		
4.18																		
4.19																		
5.1	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
5.2	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
5.3	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025	●	○	
5.4	0,021	0,014	0,010	0,025	0,016	0,012	0,031	0,020	0,015	0,041	0,027	0,020	0,052	0,034	0,025</td			

A photograph showing two men in a workshop setting. One man, wearing glasses and a grey t-shirt, is pointing towards a machine. The other man, wearing a dark polo shirt, is looking at the machine. They appear to be engaged in a discussion or training session. The background shows industrial equipment, including a large blue machine and a control panel with various buttons and a screen.

FIT IN METAL CUTTING

With our practice-oriented training courses,
you will leave the competition behind.

Table of contents

Grade description	114
Product range – face milling	
MaxiMill 274 system	115+116
System MaxiMill 271	117
MaxiMill 273 system	118
MaxiMill 270 system	119
Product range – shoulder milling	
MaxiMill 491 system	120
MaxiMill 211 system	121
MaxiMill 490 system	122
Product range – form cutting	
MaxiMill HFC system	123+124
MaxiMill 251/251 RS system	125+126
Cutting Data	127

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.


Grade description

CTCM245

- ▲ Carbide, TiCN-Al₂O₃ coated
- ▲ ISO M45/P50; S35
- ▲ Special grade for machining high-alloy steel materials

OFHW / OFHT / SFHT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
OFHT 040305..	9.52	3.35	3.94	-	3.18
OFHT 050410..	12.70	4.80	4.50	-	4.76
OFHW 040302..	9.52	3.35	3.94	-	3.18
SFHT 0903AF..	9.80	3.35	9.00	2.25	3.50
SFHT 1204AF..	12.70	4.80	12.70	1.42	4.76

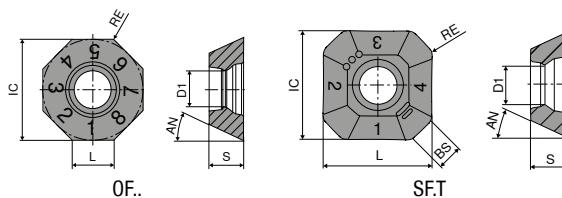

OFHW

CTCM245

DRAGOSKIN



OFHW

NEW 1H/17

Article no.

51 105 ...

£

15.79 90201

ISO	RE
	mm
040302EN	0.2

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

OFHT

-F50
CTCM245-F50
CTCM245

DRAGOSKIN

DRAGOSKIN

OFHT

OFHT

NEW 1H/17

Article no.

51 002 ...

£

15.79 90501

ISO	RE
	mm
040305SN	0.5
050410SN	1.0

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

SFHT

-F50
CTCM245**-F50**
CTCM245

DRAGONSKIN

DRAGONSKIN



SFHT

SFHT

NEW 1H/17**NEW** 1H/17Article no.
51 012 ...Article no.
51 012 ...

£

£

17.82 92001


19.23 92501

ISO	RE		
	mm		
0903AFSR	1		
1204AFSR	1		
Steel		•	•
Stainless steel		•	•
Cast iron			
Non ferrous metals			
Heat resistant alloys		•	•
Hardened materials			

*Milling guide*Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 15**

SAKU / SOHU

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SAKU 1706AB..	17.00	5.8	11.85	3.7	6.35
SOHU 1204AB..	13.36	4.4	8.80	1.7	5.00

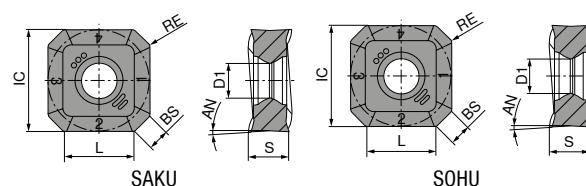

SAKU

-F50
CTCM245

DRAGONSKIN



SAKU

NEW 1H/17
Article no.
51 004 ...
£ 32.58 92001

ISO	RE
	mm
1706ABSR	0.8

Steel	●
Stainless steel	●
Cast iron	
Non ferrous metals	
Heat resistant alloys	●
Hardened materials	

SOHU

-F50
CTCM245

DRAGONSKIN



SOHU

NEW 1H/17
Article no.
51 140 ...
£ 28.82 92001

ISO	RE
	mm
1204ABSR	0.8


Steel	●
Stainless steel	●
Cast iron	
Non ferrous metals	
Heat resistant alloys	●
Hardened materials	

Milling guide

Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 25**

OAKU

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
OAKU 060508..	17.1	5.8	6	2	5.66

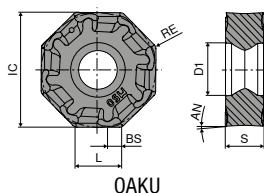**OAKU**

-F40
CTCM245

ISO	RE				
	mm				
060508ER	0.8				27.92 90801
Steel		●			
Stainless steel			●		
Cast iron				●	
Non ferrous metals					
Heat resistant alloys					●
Hardened materials					

Milling guide

Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 28**

DRAGOSKIN



OAKU

NEW 1H/17


Article no.

51 104 ...

£

SDHT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SDHT 0903AE..	9.52	3.4	9.52	1.68	3.18
SDHT 1204AE..	12.70	5.5	12.70	1.74	4.76

**SDHT****-F50**
CTCM245**-F50**
CTCM245

DRAGONSKIN



DRAGONSKIN



SDHT

NEW 1H/17

Article no.

51 109 ...

£

SDHT

NEW 1H/17

Article no.

51 109 ...

£


17.82 92001

ISO	RE				
	mm				
0903AESN	1				
1204AESN	1				
Steel			•	•	
Stainless steel			•	•	
Cast iron			•	•	
Non ferrous metals			•	•	
Heat resistant alloys			•	•	
Hardened materials			•	•	

*Milling guide*Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 33**

SNHU


Designation	IC	D1	L	S
	mm	mm	mm	mm
SNHU 09T308..	9.15	3.85	9.15	3.70
SNHU 120408..	12.20	4.40	12.20	5.00




SNHU

-F40
CTCM245-F40
CTCM245

DRAGONSKIN



DRAGONSKIN



SNHU

NEW 1H/17

Article no.

51 128 ...

£

SNHU

NEW 1H/17

Article no.

51 126 ...

£

24.96 90801

ISO

RE

mm

09T308ER

120408ER

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys


Hardened materials

Milling guide

Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 51**

XDKT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDKT 070304..	4.9	2.5	7.8	1.2	3.18
XDKT 070308..	4.9	2.5	7.8	1.2	3.18
XDKT 11T304..	6.8	2.8	10.6	1.8	3.80
XDKT 11T308..	6.8	2.8	10.6	1.4	3.80
XDKT 11T312..	6.8	2.8	10.6	1.4	3.80
XDKT 11T316..	6.8	2.8	10.6	1.4	3.80
XDKT 11T320..	6.8	2.8	10.6	1.4	3.80
XDKT 11T325..	6.8	2.8	10.6	1.4	3.80
XDKT 11T332..	6.8	2.8	10.6	0.8	3.80
XDKT 11T340..	6.8	2.8	10.6	-	3.80
XDKT 150508..	9.3	4.4	14.8	1.6	5.56
XDKT 150512..	9.3	4.4	14.8	1.6	5.56
XDKT 150516..	9.3	4.4	14.8	1.6	5.56
XDKT 150520..	9.3	4.4	14.8	1.6	5.56
XDKT 150525..	9.3	4.4	14.8	1.6	5.56
XDKT 150532..	9.3	4.4	14.8	1.9	5.56
XDKT 150540..	9.3	4.4	14.8	1.2	5.56
XDKT 150560..	9.3	4.4	14.8	-	5.56
XDKT 200708..	12.5	5.5	18.8	-	6.93
XDKT 200716..	12.5	5.5	18.8	1.56	6.89
XDKT 200732..	12.5	5.5	18.8	0.9	6.82
XDKT 200740..	12.5	5.5	18.8	2.2	6.80
XDKT 200760..	12.5	5.5	18.8	-	6.80



XDKT

-F40
CTCM245-F40
CTCM245-F40
CTCM245-F40
CTCM245-F50
CTCM245

DRAGONSkin



DRAGONSkin



DRAGONSkin



DRAGONSkin



DRAGONSkin



ISO	RE	XDKT		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT		XDKT				
		NEW	1H/17	Article no.	51 112 ...	£	NEW	1H/17	Article no.	51 114 ...	£	NEW	1H/17	Article no.	51 113 ...	£	NEW	1H/17	Article no.	51 127 ...	£	NEW	1H/17	Article no.	51 034 ...	£
070304ER	0.4																									
070308ER	0.8																									
11T304ER	0.4																									
11T308ER	0.8																									
11T308SR	0.8																									
11T312ER	1.2																									
11T316ER	1.6																									
11T320ER	2.0																									
11T325ER	2.5																									
11T332ER	3.2																									
11T340ER	4.0																									
150508ER	0.8																									
150512ER	1.2																									
150516ER	1.6																									
150520ER	2.0																									
150525ER	2.5																									
150532ER	3.2																									
150540ER	4.0																									
150560ER	6.0																									
200708ER	0.8																									
200716ER	1.6																									
200732ER	3.2																									
200740ER	4.0																									
200760ER	6.0																									

Steel	●	●	●	●	●
Stainless steel	●	●	●	●	●
Cast iron					
Non ferrous metals					
Heat resistant alloys	●	●	●	●	●
Hardened materials					


1) Insert radius >1.6 mm: Modify cutter body

Milling guide

Matching milling cutters can be found in the main catalogue in Chapter 15 → Milling tools with indexable inserts Page 57

SDNT / SDMT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SDMT 120508..	12.70	5.5	12.70	3.0	5.00
SDNT 09T308..	9.52	4.4	9.52	2.5	3.97



SDNT / SDMT

-F50
CTCM245-F50
CTCM245

DRAGOSKIN

DRAGOSKIN

SDNT

SDMT

NEW 1H/17

NEW 1H/17

Article no.
51 111 ...Article no.
51 110 ...

£ 11.82 90801


£ 16.75 90801

ISO	RE				
	mm				
09T308ER	0.8				
120508ER	0.8				
Steel			●	●	
Stainless steel			●	●	
Cast iron					
Non ferrous metals					
Heat resistant alloys			●	●	
Hardened materials					

*Milling guide*Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 74**

XPLX / XDLX / XOLX

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDLX 09T308..	9.52	4.4	9	1.9	3.97
XOLX 120410..	12.70	5.5	12	1.3	4.76
XOLX 190615..	19.14	6.0	19	-	6.35
XPLX 060305..	6.35	2.8	6	1	2.75



XPLX

-F40
CTCM245

DRAGONSKIN



XPLX

NEW 1H/17

Article no.

51 116 ...

£

13.69 90501

ISO	RE
	mm
060305ER	0.5

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	
Heat resistant alloys	●
Hardened materials	

XDLX

-M50
CTCM245

DRAGONSKIN



XDLX

NEW 1H/17

Article no.

51 016 ...

£

13.96 90801

ISO	RE
	mm
09T308SR	0.8

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	
Heat resistant alloys	●
Hardened materials	

XOLX

-F40
CTCM245**-F40**
CTCM245**-M50**
CTCM245

DRAGONSkin

DRAGONSkin

DRAGONSkin



XOLX

XOLX

XOLX

NEW 1H/17
Article no.
51 022 ...£
16.33 91001**NEW** 1H/17
Article no.
51 022 ...£
16.33 91001**NEW** 1H/17
Article no.
51 017 ...£
16.33 91001

ISO RE

mm

120410ER 1.0

120410SR 1.0

190615ER 1.5

Steel

Stainless steel

Cast iron

Non ferrous metals



Heat resistant alloys

Hardened materials

*Milling guide*Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 97**

RDHX / RPHX / RPNX

Designation	IC	D1	S
	mm	mm	mm
RDHX 0802M0..	8	2.8	2.38
RDHX 0802M4..	8	2.8	2.38
RP.X 10T3M4..	10	3.4	3.97
RP.X 10T3M8..	10	3.4	3.97
RP.X 1204M4..	12	4.4	4.76
RP.X 1204M6..	12	4.4	4.76
RP.X 1204M8..	12	4.4	4.76
RP.X 1605M8..	16	5.5	5.56
RPNX 2006M8..	20	6.0	6.35

RP.X 10T3.. / RP.X 1204.. / RP.X 1605.. /
RPNX 2006..

RDHX 0501.. / RDHX0802..

RDHX

-F50
CTCM245

DRAGONSKIN



RDHX

NEW 1H/17

Article no.
51 083 ...

£

13.31 92001
13.31 92101

ISO

0802M0SN
0802M4SN

Steel
Stainless steel
Cast iron
Non ferrous metals
Heat resistant alloys
Hardened materials

RPHX

-F50
CTCM245**-M50**
CTCM245

DRAGONSKIN



RPHX

NEW 1H/17Article no.
51 051 ...

£

14.72 92001¹⁾

14.72 92101

DRAGONSKIN



RPHX

NEW 1H/17Article no.
51 050 ...

£

14.72 92001¹⁾

ISO

10T3M4SN

10T3M8SN

1204M4SN

1204M6SN

1204M8SN

1605M8SN

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys

Hardened materials

1) Insert with 4 indexes

RPNX

-F50
CTCM245**-M50**
CTCM245

DRAGONSKIN



RPNX

NEW 1H/17Article no.
51 055 ...

£

14.72 92001¹⁾

14.72 92101

DRAGONSKIN



RPNX

NEW 1H/17Article no.
51 054 ...

£

ISO

10T3M4SN

10T3M8SN

1204M4SN

1204M6SN

1204M8SN

1605M8SN

2006M8SN

Steel

Stainless steel

Cast iron

Non ferrous metals

Heat resistant alloys

Hardened materials

1) Insert with 4 indexes

Milling guide

Matching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 106**

Cutting data standard values


Cutting Material hard ($v_c \uparrow$) → tough ($v_c \downarrow$)

DRAGONSKIN

	Index	Material	Strength N/mm ² / HB / HRC	CTCM245	
				DRAGONSKIN	
P	1.1	General construction steel	< 800 N/mm ²		
	1.2	Free cutting steel	< 800 N/mm ²		
	1.3	Hardened steel, non alloyed	< 800 N/mm ²		
	1.4	Alloyed hardened steel	< 1000 N/mm ²	250	
	1.5	Tempering steel, unalloyed	< 850 N/mm ²		
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²		
	1.7	Tempering steel, alloyed	< 800 N/mm ²	220	
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	180	
	1.9	Steel castings	< 850 N/mm ²	250	
	1.10	Nitriding steel	< 1000 N/mm ²	220	
	1.11	Nitriding steel	< 1200 N/mm ²	180	
	1.12	Roller bearing steel	< 1200 N/mm ²	250	
	1.13	Spring steel	< 1200 N/mm ²	250	
	1.14	High-speed steel	< 1300 N/mm ²	120	
	1.15	Cold working tool steel	< 1300 N/mm ²	220	
	1.16	Hot working tool steel	< 1300 N/mm ²	160	
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	240	
	2.2	Stainless steel, ferritic	< 750 N/mm ²	240	
	2.3	Stainless steel, martensitic	< 900 N/mm ²	260	
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	280	
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	180	160
	2.6	Stainless steel, austenitic	< 750 N/mm ²	200	180
	2.7	Heat resistant steel	< 1100 N/mm ²	150	130
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²		
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²		
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²		
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²		
	3.5	White malleable cast iron	270–450 N/mm ²		
	3.6	White malleable cast iron	500–650 N/mm ²		
	3.7	Black malleable cast iron	300–450 N/mm ²		
	3.8	Black malleable cast iron	500–800 N/mm ²		
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²		
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²		
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²		
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²		
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²		
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²		
	4.7	Copper wrought alloys	< 700 N/mm ²		
	4.8	Special copper alloys	< 200 HB		
	4.9	Special copper alloys	< 300 HB		
	4.10	Special copper alloys	> 300 HB		
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²		
	4.12	Long-chipping brass	< 600 N/mm ²		
	4.13	Thermoplastics			
	4.14	Duroplastics			
	4.15	Fibre-reinforced plastics			
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²		
	4.17	Graphite			
	4.18	Tungsten and tungsten alloys			
	4.19	Molybdenum and molybdenum alloys			
S	5.1	Pure nickel		50	
	5.2	Nickel alloys		40	
	5.3	Nickel alloys	< 850 N/mm ²	40	
	5.4	Nickel molybdenum alloys		30	
	5.5	Nickel-chromium alloys	< 1300 N/mm ²	30	
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²	30	
	5.7	Heat resistant alloys	< 1300 N/mm ²	30	
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²	30	
	5.9	Pure titanium	< 900 N/mm ²		
	5.10	Titanium alloys	< 700 N/mm ²		
	5.11	Titanium alloys	< 1200 N/mm ²		
H	6.1		< 45 HRC		
	6.2		46–55 HRC		
	6.3	Tempered steel	56–60 HRC		
	6.4		61–65 HRC		
	6.5		65–70 HRC		

XDKT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
XDKT 200708..	12.5	5.5	18.8	-	6.93
XDKT 200708..	12.5	5.5	18.8	2.66	6.93
XDKT 200716..	12.5	5.5	18.8	1.56	6.89
XDKT 200732..	12.5	5.5	18.8	0.9	6.82
XDKT 200740..	12.5	5.5	18.8	2.2	6.80
XDKT 200760..	12.5	5.5	18.8	-	6.80

**XDKT****-M50
CTCP230****-M50
CTPP235****-F40
CTPM245****-M50
CTPK220****-F40
CTC5240****-F40
CTCS245**

DRAGONSkin

DRAGONSkin

DRAGONSkin

DRAGONSkin

DRAGONSkin

DRAGONSkin

XDKT

XDKT

XDKT

XDKT

XDKT

XDKT

NEW 1B/61**NEW 1B/61****NEW 1H/17****NEW 1B/61****NEW 1H/D4****NEW 1H/D4**Article no.
51 145 ...Article no.
51 145 ...Article no.
51 127 ...Article no.
51 145 ...Article no.
51 127 ...Article no.
51 127 ...

£

£

£

£

£

£

ISO	RE	XDKT NEW 1B/61	XDKT NEW 1B/61	XDKT NEW 1H/17	XDKT NEW 1B/61	XDKT NEW 1H/D4	XDKT NEW 1H/D4
	mm						
200708ER	0.8	19.56 00800	19.56 01600	24.26 45800	19.56 60800	24.26 15800	24.26 55800
200716ER	1.6	19.56 01600	19.56 11600	24.26 46600	19.56 61600	24.26 16600	24.26 56600
200732ER	3.2			24.26 48200		24.26 18200	24.26 58200
200740ER	4.0					24.26 19000	
200760ER	6.0					24.26 19200	

Steel	●	●	●	○
Stainless steel	○	○	●	
Cast iron				●
Non ferrous metals				
Heat resistant alloys				●
Hardened materials				●

Milling guideMatching milling cutters can be found in the main catalogue in Chapter 15 → **Milling tools with indexable inserts Page 72**


System MaxiMill 211-20

Cutting data recommendations/Technology data
for standard inserts

Material	F			M			R		
	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm
Steel	50-280	0,1-0,3	18	50-280	0,1-0,3	18	50-280	0,1-0,3	18
Stainless steel	130-280	0,08-0,2	18	130-280	0,08-0,2	18	130-280	0,08-0,2	18
Cast iron	80-320	0,1-0,25	18	80-320	0,1-0,25	18	80-320	0,1-0,25	18
Non ferrous metals									
Heat resistant	30-80	0,08-0,2	18	30-80	0,08-0,2	18	30-80	0,08-0,2	18
hardened materials									

Machining strategy


Helical plunge milling

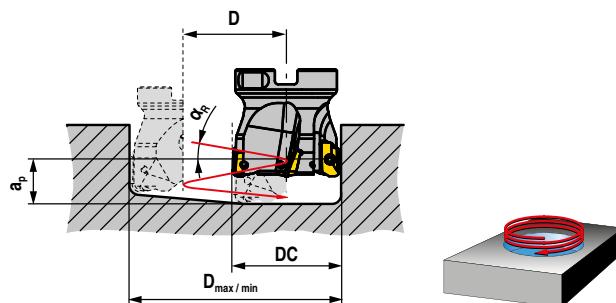

DC mm	D _{max / RE 0,4} mm	D _{min} mm	α _{R max} °
63	124	107	2,2
80	158	143	1,7
100	198	183	1,3

$$a_p \text{ in mm} = D * \pi * \tan \alpha_R$$


Axial plunging

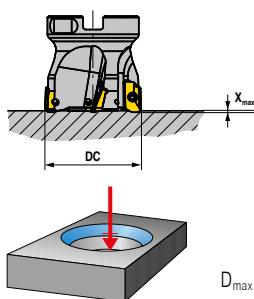

DC mm	X _{max} mm
63	2,0
80	2,0
100	2,0

D_{max}, in mm = largest diameter for flat bottom hole
D_{min}, in mm = smallest hole diameter for flat bottom surface



Angled ramping

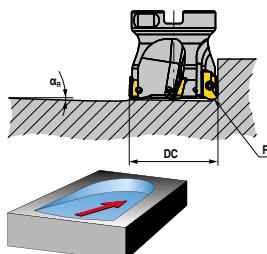

DC mm	α °
63	2,2
80	1,7
100	1,3

$$D = D_{\max} - DC / D_{\min} - DC$$

Starting Parameter

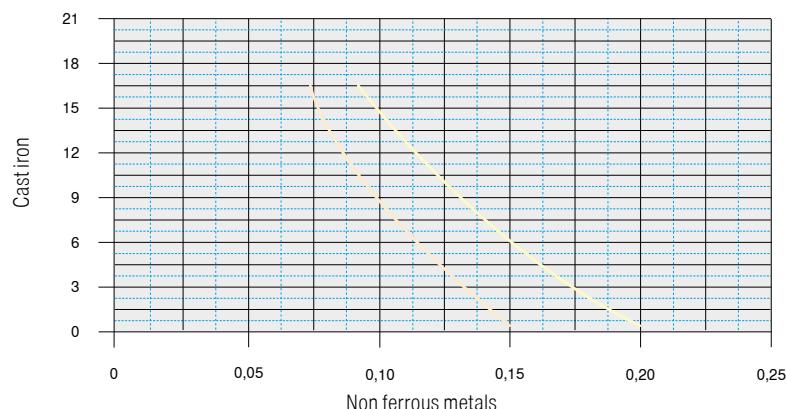

Index	Material			Inserts		v_c in m/min	Cooling
1.15	Steel	1.2312	40CrMnMoS 8-6				
2.6	Stainless steel	1.4571	X6CrNiMoTi 1712 2	XDKT200708ER-F40	CTPM240	180	Dry
3.1	Cast iron	5.1301	EN-GJL-250 (GG25)				
5.8	Non ferrous metals	2.4856	Inconel 718	XDKT200708ER-F40	CTC5240	35	Emulsion




From $v_c > 400$ m/min, the tool must be balanced!

Cutting data standard values

			Cutting Material hard ($v_c \uparrow$) → tough ($v_c \downarrow$)										
	Index	Material	Strength N/mm ² / HB / HRC	DRAGONSKIN									
				CTCP230	CTPP235	CTPM245	CTPK220	CTC5240	CTCS245	CTCP230	CTPP235	CTPM245	CTPK220
P	1.1	General construction steel	< 800 N/mm ²	280	170	240	140			300	180		
	1.2	Free cutting steel	< 800 N/mm ²	230	140	190	110			250	150		
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	280	170	240	140			300	180		
	1.4	Alloyed hardened steel	< 1000 N/mm ²	250	150	220	130	250					
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	250	150	210	130			270	160		
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	250	150	210	130			270	160		
	1.7	Tempering steel, alloyed	< 800 N/mm ²	250	150	220	130	220					
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	190	110	160	100	180					
	1.9	Steel castings	< 850 N/mm ²	230	140	200	120	250		260	160		
	1.10	Nitriding steel	< 1000 N/mm ²	250	150	220	130	220					
	1.11	Nitriding steel	< 1200 N/mm ²	140	90	120	70	180					
	1.12	Roller bearing steel	< 1200 N/mm ²	250	150	220	130	250					
	1.13	Spring steel	< 1200 N/mm ²	250	150	210	130	250		270	160		
	1.14	High-speed steel	< 1300 N/mm ²	100	60	90	50	120					
	1.15	Cold working tool steel	< 1300 N/mm ²	130	80	110	70	220					
	1.16	Hot working tool steel	< 1300 N/mm ²	130	80	110	70	160					
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	90	60	80	50	240					
	2.2	Stainless steel, ferritic	< 750 N/mm ²	130	80	110	70	240					
	2.3	Stainless steel, martensitic	< 900 N/mm ²	90	60	80	50	260					
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	130	80	110	70	280					
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²			190	110	180	160				
	2.6	Stainless steel, austenitic	< 750 N/mm ²			190	110	200	180				
	2.7	Heat resistant steel	< 1100 N/mm ²			190	110	150	130				
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²							320	160		
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²							320	160		
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²							210	130		
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²							140	80		
	3.5	White malleable cast iron	270–450 N/mm ²							200	120		
	3.6	White malleable cast iron	500–650 N/mm ²							200	120		
	3.7	Black malleable cast iron	300–450 N/mm ²							170	100		
	3.8	Black malleable cast iron	500–800 N/mm ²							170	100		
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²										
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²										
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²										
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²										
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²										
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²										
	4.7	Copper wrought alloys	< 700 N/mm ²										
	4.8	Special copper alloys	< 200 HB										
	4.9	Special copper alloys	< 300 HB										
	4.10	Special copper alloys	> 300 HB										
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²										
	4.12	Long-chipping brass	< 600 N/mm ²										
S	4.13	Thermoplastics											
	4.14	Duroplastics											
	4.15	Fibre-reinforced plastics											
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²										
	4.17	Graphite											
	4.18	Tungsten and tungsten alloys											
	4.19	Molybdenum and molybdenum alloys											
	5.1	Pure nickel								50	30–50		
	5.2	Nickel alloys								50	30–50		
	5.3	Nickel alloys	< 850 N/mm ²							50	30–50		
H	5.4	Nickel molybdenum alloys								40	30–50		
	5.5	Nickel-chromium alloys	< 1300 N/mm ²							40	30–50		
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²							40	30–50		
	5.7	Heat resistant alloys	< 1300 N/mm ²							40	30–50		
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²							40	30–50		
	5.9	Pure titanium	< 900 N/mm ²							90			
H	5.10	Titanium alloys	< 700 N/mm ²							60			
	5.11	Titanium alloys	< 1200 N/mm ²							60			
	6.1		< 45 HRC										
H	6.2		46–55 HRC										
	6.3	Tempered steel	56–60 HRC										
	6.4		61–65 HRC										
	6.5		65–70 HRC										

System MaxiMill 211-20

Chip Breakers Overview

Model	fine	Machining Medium		rough	Sectional illustration	f_z in mm	
-M50		CTCP230/CTPP235	CTCP230/CTPP235	CTPK220	CTPK220	 0,10–0,25	
-F40		CTPM245	CTPM245	CTC5240/CTCS245	CTC5240/CTCS245	CTC5240/CTCS245	 0,05–0,15

Variable tool holder systems

High-performance cooling




- ▲ For efficient turning
- ▲ Optimum cooling thanks to precisely aligned **direct cooling** nozzles
- ▲ Improved chip control

- ▲ Improved machining reliability
- ▲ Increased material removal
- ▲ Shorter machining times

Tool holder

All tool holders marked with **direct cooling** in the product tables can be equipped for high-performance cooling.

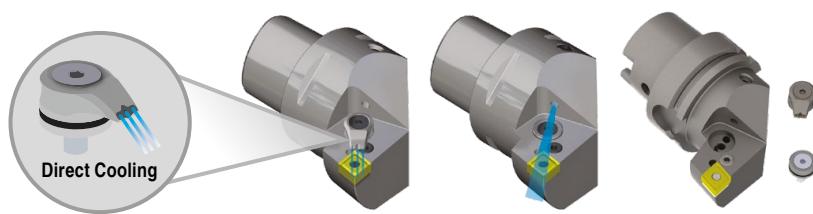

- i** Using the DC kit blocks the other outlet of the coolant so that all of the pressure is concentrated through the DC kit.



The high-performance coolant set includes:

- ▲ Direct cooling nozzle
- ▲ O ring

Cooling and clamping systems



- ▲ Clamping system: The indexable insert is clamped by means of **type S** screw clamping.
- ▲ Cooling system: Tool holders for positive inserts have an aligned coolant nozzle.



- ▲ Clamping system: The indexable insert is clamped by means of **type D** double clamping.
- ▲ Cooling system: Tool holders with double clamping have an adjustable high-pressure cooling nozzle.



- ▲ Clamping system: The indexable insert is clamped by means of **type P** lever clamping.
- ▲ Cooling system: Tool holders with lever clamping have an aligned coolant nozzle.

Toolholder – PWLN 95°/80°

Scope of supply:
without high-performance coolant set




Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand		Right-hand		
							NEW	Y8	Article no.	84 653 ...	£
PSC40 PWLN R/L 50050-08	PSC 40	50	27	50	WN.. 0804	DC	476.96	00895	476.96	00895	
PSC50 PWLN R/L 65060-08	PSC 50	60	35	65	WN.. 0804	DC	525.14	00894	525.14	00894	
PSC63 PWLN R/L 80065-08	PSC 63	65	45	80	WN.. 0804	DC	596.20	00893	596.20	00893	

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143**.



Shim



Elbow lever screw



Lever



Carbide seat

Spare parts**Adapter**

	Article no.	Article no.	Article no.	Article no.
PSC 40	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900
PSC 50	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900
PSC 63	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900

Toolholder – SCLC 95°/80°

Scope of supply:
without high-performance coolant set




Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand		Right-hand		
							NEW	Y8	Article no.	84 655 ...	£
PSC40 SCLC R/L 50050-12	PSC 40	50	27	50	CC.. 1204	DC	427.24	01295	427.24	01295	
PSC50 SCLC R/L 65060-12	PSC 50	60	35	65	CC.. 1204	DC	489.50	01294	489.50	01294	
PSC63 SCLC R/L 80065-12	PSC 63	65	45	80	CC.. 1204	DC	544.50	01293	544.50	01293	

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143**.



Clamping screw

Spare parts**Adapter**

	Article no.	Article no.	Article no.
PSC 40	10.03 27500	10.03 27500	10.03 27500
PSC 50			
PSC 63			

Toolholder – PCLN 95°/80°

Scope of supply:
without high-performance coolant set




Diagram shows right hand version

ISO designation	Adapter	LPR	WF	DMIN	Insert	Direct cooling compatible	Left-hand NEW Y8	Right-hand NEW Y8
		mm	mm	mm			Article no.	Article no.
PSC40 PCLN R/L 50050-12	PSC 40	50	27	50	CN.. 1204	DC	476.96 01295	476.96 01295
PSC50 PCLN R/L 65060-12	PSC 50	60	35	65	CN.. 1204	DC	525.14 01294	525.14 01294
PSC63 PCLN R/L 80065-12	PSC 63	65	45	80	CN.. 1204	DC	596.20 01293	596.20 01293

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143**.

Spare parts

Adapter

	Article no.	Article no.	Article no.	Article no.
	£	£	£	£
PSC 40	2.42 29200	M8X1/L17 SW3	9.42 28700	27.96 29000
PSC 50	2.42 29200	M8X1/L17 SW3	9.42 28700	27.96 29000
PSC 63	2.42 29200	M8X1/L17 SW3	9.42 28700	27.96 29000

Toolholder – SDUC 93°/55°




Diagram shows right hand version

ISO designation	Adapter	LPR	WF	DMIN	Insert	Left-hand NEW Y8	Right-hand NEW Y8
		mm	mm	mm		Article no.	Article no.
PSC40 SDUC R/L 50050-11	PSC 40	50	27	50	DC.. 11T3	427.24 01195	427.24 01195
PSC50 SDUC R/L 65060-11	PSC 50	60	35	65	DC.. 11T3	489.50 01194	489.50 01194
PSC63 SDUC R/L 80065-11	PSC 63	65	45	80	DC.. 11T3	544.50 01193	544.50 01193

Spare parts

Adapter

	Article no.
	£
PSC 40	6.64 27600
PSC 50	6.64 27600
PSC 63	6.64 27600



Clamping screw

Toolholder – PDUN 93°/55°

Scope of supply:
without high-performance coolant set

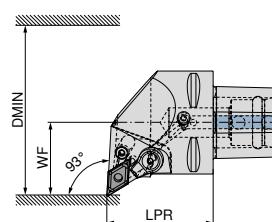


Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand		Right-hand						
							NEW	Y8	Article no.	84 661 ...	£	NEW	Y8	Article no.	84 660 ...
PSC40 PDUN R/L 50050-15	PSC 40	50	27	50	DN.. 1506	DC			476.96	01595			476.96	01595	
PSC50 PDUN R/L 65060-15	PSC 50	60	35	65	DN.. 1506	DC			525.14	01594			525.14	01594	
PSC63 PDUN R/L 80065-15	PSC 63	65	45	80	DN.. 1506	DC			596.20	01593			596.20	01593	

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → [Page 143](#).

Spare parts

Adapter

		Article no.	84 950 ...	£	Article no.	84 950 ...	£	Article no.	84 950 ...	£	Article no.	84 950 ...	£
PSC 40		2.42	29200		M8X1/L17 SW3	9.42	28700	32.56	28900	50.20	27900		
PSC 50		2.42	29200		M8X1/L17 SW3	9.42	28700	32.56	28900	50.20	27900		
PSC 63		2.42	29200		M8X1/L17 SW3	9.42	28700	32.56	28900	50.20	27900		

Toolholder – SDJC 93°/55°

Scope of supply:
without high-performance coolant set




Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand		Right-hand						
							NEW	Y8	Article no.	84 663 ...	£	NEW	Y8	Article no.	84 662 ...
PSC40 SDJC R/L 50050-11	PSC 40	50	27	50	DC.. 11T3	DC			427.24	01195			427.24	01195	
PSC50 SDJC R/L 65060-11	PSC 50	60	35	65	DC.. 11T3	DC			489.50	01194			489.50	01194	
PSC63 SDJC R/L 80065-11	PSC 63	65	45	80	DC.. 11T3	DC			544.50	01193			544.50	01193	

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → [Page 143](#).

Spare parts

Adapter

		Article no.	84 950 ...	£
PSC 40		6.64	27600	
PSC 50		6.64	27600	
PSC 63		6.64	27600	

Toolholder – PDJN 93°/55°

Scope of supply:
without high-performance coolant set

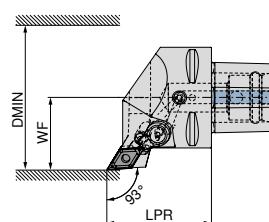


Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand	Right-hand
							NEW Y8 Article no. 84 665 ... £	NEW Y8 Article no. 84 664 ... £
PSC40 PDJN R/L 50050-15	PSC 40	50	27	50	DN.. 1506	DC	550.22 01595	476.96 01595
PSC50 PDJN R/L 65060-15	PSC 50	60	35	65	DN.. 1506	DC	525.14 01594	525.14 01594
PSC63 PDJN L 80065-15	PSC 63	65	45	80	DN.. 1506	DC	596.20 01593	596.20 01593
PSC63 PDJNR R 80065-15	PSC 63	65	45	80	DN.. 1506	DC	596.20 01593	596.20 01593

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → [Page 143](#).



Shim



Elbow lever screw



Lever



Carbide seat

Spare parts

Adapter

	Article no.	Article no.	Article no.	Article no.
PSC 40	84 950 ...	84 950 ...	84 950 ...	84 950 ...
PSC 50	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900
PSC 63	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900
	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900

Toolholder – SDHC 107,5°/55°

Scope of supply:
without high-performance coolant set




Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand	Right-hand
							NEW Y8 Article no. 84 667 ... £	NEW Y8 Article no. 84 666 ... £
PSC40 SDHC R/L 50050-11	PSC 40	50	27	50	DC.. 11T3	DC	427.24 01195	427.24 01195
PSC50 SDHC R/L 65060-11	PSC 50	60	35	65	DC.. 11T3	DC	489.50 01194	489.50 01194
PSC63 SDHC R/L 80065-11	PSC 63	65	45	80	DC.. 11T3	DC	544.50 01193	544.50 01193

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → [Page 143](#).



Clamping screw

Spare parts

Adapter

	Article no.	Article no.
PSC 40	6.64 27600	6.64 27600
PSC 50	6.64 27600	6.64 27600
PSC 63	6.64 27600	6.64 27600

Toolholder – PDHN 107,5°/55°

Scope of supply:
without high-performance coolant set

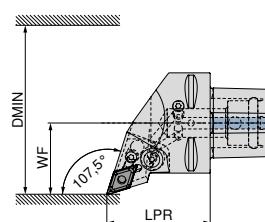


Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand NEW Y8 Article no. 84 669 ... £	Right-hand NEW Y8 Article no. 84 668 ... £
PSC40 PDHN R/L 50050-15	PSC 40	50	27	50	DN.. 1506		476.96 01595	476.96 01595
PSC50 PDHN R/L 65060-15	PSC 50	60	35	65	DN.. 1506	DC	525.14 01594	525.14 01594
PSC63 PDHN R/L 80065-15	PSC 63	65	45	80	DN.. 1506	DC	596.20 01593	596.20 01593

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143.**



Shim



Elbow lever screw



Lever



Carbide seat

Spare parts**Adapter**

		Article no. 84 950 ... £			
PSC 40	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900	50.20 27900
PSC 50	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900	50.20 27900
PSC 63	2.42 29200	M8X1/L17 SW3	9.42 28700	32.56 28900	50.20 27900

Toolholder – SVPC 117,5°/35°

Scope of supply:
without high-performance coolant set

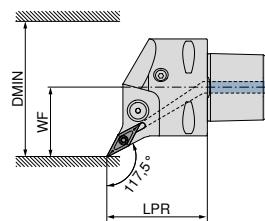


Diagram shows right hand version

ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Direct cooling compatible	Left-hand NEW Y8 Article no. 84 671 ... £	Right-hand NEW Y8 Article no. 84 670 ... £
PSC40 SVPC R/L 50050-16	PSC 40	50	27	50	VC.. 1604	DC	427.24 01695	427.24 01695
PSC50 SVPC R/L 65060-16	PSC 50	60	35	65	VC.. 1604	DC	489.50 01694	489.50 01694
PSC63 SVPC R/L 80065-16	PSC 63	65	45	80	VC.. 1604	DC	544.50 01693	544.50 01693

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143.**



Clamping screw

Spare parts**Adapter**

		Article no. 84 950 ... £	Article no. 84 950 ... £	Article no. 84 950 ... £
PSC 40	6.64	27600	6.64	27600
PSC 50	6.64	27600	6.64	27600
PSC 63	6.64	27600	6.64	27600

Toolholder – DVPN 117,5°/35°

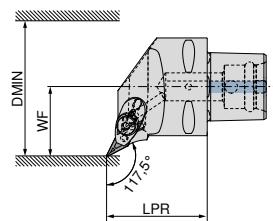


Diagram shows right hand version



ISO designation	Adapter	LPR mm	WF mm	DMIN mm	Insert	Left-hand		Right-hand							
						NEW	Y8	Article no.	84 673 ...	£	NEW	Y8	Article no.	84 672 ...	£
PSC40 DVPN R/L 50050-16	PSC 40	50	27	50	VN.. 1604			514.36	01695			514.36	01695		
PSC50 DVPN R/L 65060-16	PSC 50	60	35	65	VN.. 1604			578.38	01694			578.38	01694		
PSC63 DVPN R/L 80065-16	PSC 63	65	45	80	VN.. 1604			631.84	01693			631.84	01693		




Spare parts	Article no. 84 950 ...				
Adapter	£	£	£	£	£
PSC 40	50.36	28500	16.21	28400	M6X28 SW4
PSC 50	50.36	28500	16.21	28400	M6X28 SW4
PSC 63	50.36	28500	16.21	28400	M6X28 SW4

Toolholder – SCMC 50°/80°/50°

Scope of supply:

without high-performance coolant set



ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	Neutral	NEW	Y8	Article no.	84 674 ...	£
PSC63 SCMC N 0100-12	PSC 63	100	CC.. 1204	DC				544.50	01293	
PSC63 SCMC N 0130-12	PSC 63	130	CC.. 1204	DC				544.50	11293	


i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143**.



Spare parts	Article no. 84 950 ...	
Adapter	£	
PSC 63	10.03	27500

Toolholder – PCMN 50°/80°/50°

Scope of supply:
without high-performance coolant set




ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	Neutral	
					NEW	Y8
PSC63 PCMN N 0100-12	PSC 63	100	CN.. 1204	DC	596.20	01293
PSC63 PCMN N 0130-12	PSC 63	130	CN.. 1204	DC	596.20	11293

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143.**

Spare parts	Shim Article no. 84 950 ... £ 2.42	Elbow lever screw Article no. 84 950 ... £ 9.42	Lever Article no. 84 950 ... £ 27.96	Carbide seat Article no. 84 950 ... £ 27.30
Adapter	PSC 63	29200 M8X1/L17 SW3	28700	29000 27800

Toolholder – SDNC 62,5°/55°/62,5°

Scope of supply:
without high-performance coolant set




ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	Neutral	
					NEW	Y8
PSC63 SDNC N 0100-11	PSC 63	100	DC.. 11T3	DC	544.50	01193
PSC63 SDNC N 0130-11	PSC 63	130	DC.. 11T3	DC	544.50	11193

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143.**

Spare parts	Clamping claw Article no. 84 950 ... £ 50.36	Ring-shaped nozzle Article no. 84 950 ... £ 16.21	Clamping Screw Article no. 84 950 ... £ 42.50	Clamping screw Article no. 84 950 ... £ 10.03	Carbide seat Article no. 84 950 ... £ 50.20
Adapter	28600	28400 M6X28 SW4	28300	27500	27900


Toolholder – PDNN 62,5°/55°/62,5°

Scope of supply:
without high-performance coolant set



ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	Neutral NEW Y8	Article no. 84 676 ...	£
PSC63 PDNN N 0100-15	PSC 63	100	DN.. 1506	DC		596.20	01593
PSC63 PDNN N 0130-15	PSC 63	130	DN.. 1506	DC		596.20	11593

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143.**




Spare parts

Adapter

PSC 63	6.64	27600
--------	------	-------

Toolholder – SVVC 72,5°/35°/72,5°

Scope of supply:
without high-performance coolant set



ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	Neutral NEW Y8	Article no. 84 676 ...	£
PSC63 SVVC N 0100-16	PSC 63	100	VC.. 1604	DC		544.50	01693
PSC63 SVVC N 0130-16	PSC 63	130	VC.. 1604	DC		544.50	11693

i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143.**




Spare parts

Adapter

PSC 63	6.64	27600
--------	------	-------

Toolholder – DVVN 72,5°/35°/72,5°

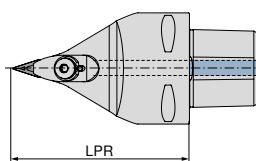

Neutral

NEW	Y8
Article no.	84 679 ...
£	631.84


ISO designation	Adapter	LPR mm	Insert	
PSC63 DVVN N 0100-16	PSC 63	100	VN.. 1604	631.84 01693
PSC63 DVVN N 0130-16	PSC 63	130	VN.. 1604	631.84 11693



Spare parts	Article no. 84 950 ...			
Adapter	£ 50.36 28500	£ 16.21 28400	M6X28 SW4	£ 42.50 28300

Toolholder – PDMN 48°/55°

Scope of supply:
without high-performance coolant set



Neutral

NEW	Y8
Article no.	84 680 ...
£	734.58 11593

ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	
PSC63 PDMN L 0130-15	PSC 63	130	DN.. 1506	DC	6.64 27600


i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143**.



Spare parts	Article no. 84 950 ...
Adapter	£ 6.64 27600

Toolholder – SVMC 50°/35°

Scope of supply:
without high-performance coolant set



ISO designation	Adapter	LPR mm	Insert	Direct cooling compatible	Neutral NEW Y8	Article no. 84 681 ...	£ 734.58	11693
PSC63 SVMC L 0130-16	PSC 63	130	VC.. 1604	DC				



i The high-performance coolant set with article number 84 950 27400 can be ordered as an optional extra → **Page 143**.

**Spare parts**

Adapter
PSC 63

Article no.
84 950 ...
£
6.64 27600

Toolholder – DVMN 50°/35°



ISO designation	Adapter	LPR mm	Insert	Neutral NEW Y8	Article no. 84 682 ...	£ 734.58	01693
PSC63 DVMN L 0130-16	PSC 63	130	VN.. 1604				

**Spare parts**

Adapter
PSC 63

Article no.
84 950 ...
£
2.42 29300

Article no.
84 950 ...
£
9.42 28800

Article no.
84 950 ...
£
32.56 29100

Article no.
84 950 ...
£
50.20 28100

Toolholder DCMN – DDMN 50°/48°

ISO designation	Adapter	LPR mm	Insert	Neutral	
				NEW	Y8
PSC63 DCMN-DDMN L 0130-12/15	PSC 63	130	CN.. 1204 / DN.. 1506	Article no. 84 683 ...	£ 933.02 01293
Spare parts					
Adapter	PSC 63				
		50.36	28500	Article no. 84 950 ...	£ 16.21 28400
				Article no. 84 950 ...	£ 42.50 28300
			M6X28 SW4	Article no. 84 950 ...	£ 10.03 27500
				Article no. 84 950 ...	£ 27.30 27800

High-performance coolant set

- ▲ Using the DC kit blocks the other outlet of the coolant so that all of the pressure is concentrated through the DC kit.

Scope of supply:

Direct cooling nozzle and O-ring

	Y8
	Article no. 84 950 ...
Coolant set	£ 215.25 27400


Short drill chuck

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm

Scope of supply:

Toolholder including clamping key SW4

**NC
2010**

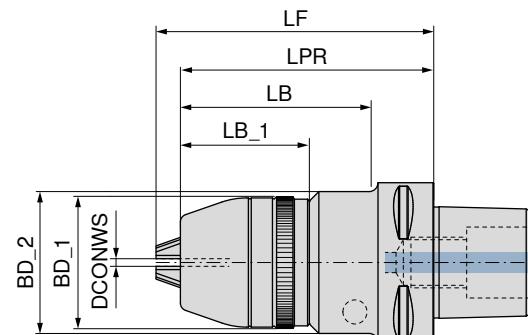

AD

G 2,5 n_{max} 12000**NEW Y8**

Article no.

84 111 ...

£

868.40 01395**891.20** 01695**886.20** 01394**909.40** 01694**904.20** 01393**928.00** 01693

Adapter	DCONWS	BD_1	BD_2	LB_1	LB	LPR	LF
	mm	mm	mm	mm	mm	mm	mm
PSC 40	0,5 - 13	49.5	56	50.9	79.0	109	100
PSC 40	2,5 - 16	52.0	56	50.9	79.0	109	100
PSC 50	0,5 - 13	49.5	56	50.9	79.0	109	100
PSC 50	2,5 - 16	52.0	56	50.9	79.0	109	100
PSC 63	0,5 - 13	49.5	56	50.9	74.5	109	100
PSC 63	2,5 - 16	52.0	56	50.9	74.5	109	100

i Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

Accessories



Others


→ Chapter 17 in main catalogue

HSK-A/PSC adapter

▲ for mounting PSC adapters according to ISO 26623-1

Scope of supply:

with tightening screw

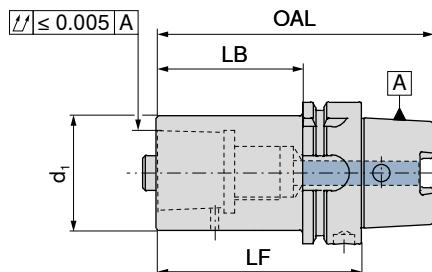

AD

NEW Y8Article no.
84 013 ...

£

Adapter	d ₁	OAL mm	LF mm	LB mm		
HSK-A 63	PSC 32	107	70	49		461.34 06387
HSK-A 63	PSC 40	112	80	54		494.64 06395
HSK-A 63	PSC 50	122	90	64		494.64 06394
HSK-A 100	PSC 32	130	80	51		544.14 10087
HSK-A 100	PSC 40	140	90	61		560.70 10095
HSK-A 100	PSC 50	150	100	71		577.26 10094
HSK-A 100	PSC 63	160	110	81		660.42 10093
HSK-A 100	PSC 80	170	120	91		710.28 10086



Threaded ring



tightening screw

Spare parts
DCONWS


	Article no. 84 950 ...		Article no. 84 950 ...
32	39.19 127	SW8	28.45 122
40	39.19 128	SW8	32.07 123
50	39.19 129	SW10	32.07 124
63	78.25 130	SW14	35.69 126
80	78.25 130	SW14	35.69 126

SK/HSK-A adapter

▲ for mounting HSK-A adapters according to ISO 12164

Scope of supply:

with clamping cartridge and cover ring

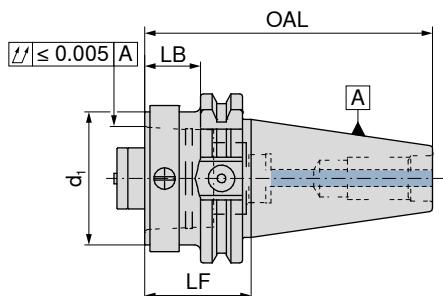

AD

NEW Y8

Article no.
84 014 ...

£


Adapter	d ₁	OAL	LB	LF	
		mm	mm	mm	
SK 40	HSK-A 32	108.40	20.9	40	826.20 04060
SK 40	HSK-A 40	108.40	20.9	40	842.76 04059
SK 40	HSK-A 50	108.40	20.9	40	859.50 04058
SK 40	HSK-A 63	148.40	60.9	80	842.76 04057
SK 50	HSK-A 100	201.75	80.9	100	1,324.08 05055
SK 50	HSK-A 32	141.75	20.9	40	1,041.84 05060
SK 50	HSK-A 40	141.75	20.9	40	1,041.84 05059
SK 50	HSK-A 50	141.75	20.9	40	1,058.58 05058
SK 50	HSK-A 63	141.75	20.9	40	1,125.00 05057

SK/PSC adapter

▲ for mounting PSC adapters according to ISO 26623-1

Scope of supply:

with tightening screw

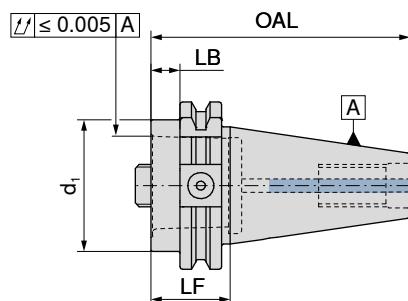

AD

NEW Y8Article no.
84 015 ...

£

Adapter	d ₁	OAL	LB	LF		
		mm	mm	mm		
SK 40	PSC 32	98.40	10.9	30		527.40 04087
SK 40	PSC 40	98.40	10.9	30		544.14 04095
SK 40	PSC 50	98.40	10.9	30		544.14 04094
SK 40	PSC 63	153.40	65.9	85		527.40 04093
SK 50	PSC 32	131.75	10.9	30		726.84 05087
SK 50	PSC 40	131.75	10.9	30		859.50 05095
SK 50	PSC 50	131.75	10.9	30		743.22 05094
SK 50	PSC 63	131.75	10.9	30		759.78 05093
SK 50	PSC 80	171.75	50.9	70		809.64 05086



Threaded ring



tightening screw

Article no.
84 950 ...Article no.
84 950 ...

£

£

32		39.19	127	SW8	28.45	122
40		39.19	128	SW8	32.07	123
50		39.19	129	SW10	32.07	124
63		78.25	130	SW14	35.69	126
80		78.25	130	SW14	35.69	126

Spare parts DCONWS


32		39.19	127	SW8	28.45	122
40		39.19	128	SW8	32.07	123
50		39.19	129	SW10	32.07	124
63		78.25	130	SW14	35.69	126
80		78.25	130	SW14	35.69	126

BT/HSK-A adapter

▲ for mounting HSK-A adapters according to ISO 12164

Scope of supply:

with clamping cartridge and cover ring

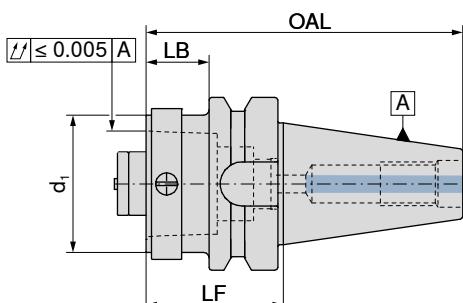

AD

NEW Y8

Article no.
84 016 ...

£


Adapter	d ₁	OAL	LB	LF		
		mm	mm	mm		
BT 40	HSK-A 32	105.4	13	40	892.62	04060
BT 40	HSK-A 40	105.4	13	40	909.36	04059
BT 40	HSK-A 50	115.4	23	50	925.92	04058
BT 40	HSK-A 63	135.4	43	70	909.36	04057
BT 50	HSK-A 100	191.8	52	90	1,390.50	05055
BT 50	HSK-A 32	151.8	12	50	1,125.00	05060
BT 50	HSK-A 40	151.8	12	50	1,125.00	05059
BT 50	HSK-A 50	161.8	22	60	1,158.12	05058
BT 50	HSK-A 63	161.8	22	60	1,224.36	05057

BT/PSC adapter

▲ for mounting PSC adapters according to ISO 26623-1

Scope of supply:

with tightening screw

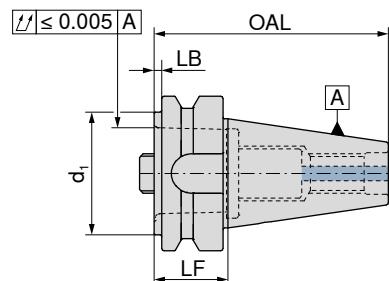

AD

NEW Y8Article no.
84 017 ...

£

Adapter	d ₁	OAL	LB	LF		
		mm	mm	mm		
BT 40	PSC 32	95.4	3	30		577.26 04087
BT 40	PSC 40	95.4	3	30		594.00 04095
BT 40	PSC 50	95.4	3	30		594.00 04094
BT 40	PSC 63	150.4	58	85		577.26 04093
BT 50	PSC 32	141.8	2	40		792.90 05087
BT 50	PSC 40	141.8	2	40		925.92 05095
BT 50	PSC 50	141.8	2	40		809.64 05094
BT 50	PSC 63	141.8	2	40		842.76 05093
BT 50	PSC 80	171.8	32	70		876.06 05086



Threaded ring



tightening screw

Spare parts DCONWS



			Article no.	Article no.
			84 950 ...	84 950 ...
32			39.19	28.45
40			39.19	32.07
50			39.19	32.07
63			78.25	35.69
80			78.25	35.69
			127	122
			SW8	123
			128	124
			129	126
			130	126
			SW14	
			SW14	

HSK-A reduction

▲ for mounting HSK-A adapters according to ISO 12164

Scope of supply:

with clamping cartridge and cover ring

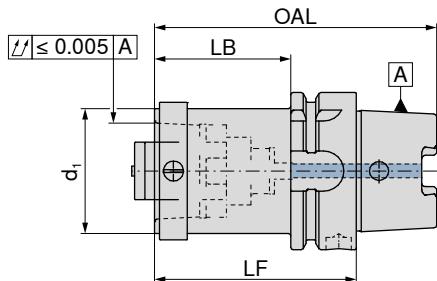


A

NEW Y8Article no.
84 040 ...

£

Adapter	d ₁	OAL	LB	LF		
		mm	mm	mm		
HSK-A 63	HSK-A 40	112	54	80	892.62	06359
HSK-A 63	HSK-A 50	112	54	80	909.36	06358
HSK-A 100	HSK-A 50	130	51	80	1,058.58	10058
HSK-A 100	HSK-A 63	150	71	100	1,058.58	10057


90° VDI to PSC adapter

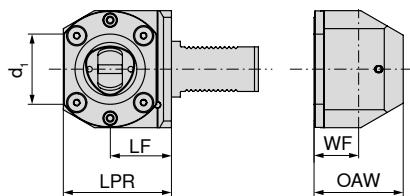

Adapter	d_1	LPR	OAW	LF	WF	90°	
						mm	mm
VDI 30	PSC 40	65	56	41	21		1,289.64
VDI 40	PSC 40	75	86	51	30		1,347.50
VDI 40	PSC 50	85	80	53	40		1,347.50
VDI 40	PSC 63	95	80	53	40		1,420.10
VDI 50	PSC 50	85	80	53	40		1,347.50
VDI 50	PSC 63	97	80	55	40		1,420.10

1) Not ex-stock


VDI to PSC adapter

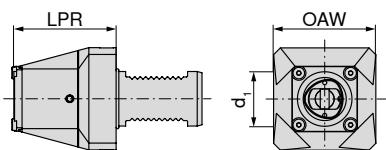

Adapter	d_1	OAW	LPR	NEW Y7			
				mm	mm	£	Article no.
VDI 30	PSC 40	60	70			1,289.64	04027 ¹⁾
VDI 40	PSC 40	75	75			1,289.64	04026 ¹⁾
VDI 40	PSC 50	82	85			1,347.50	05026 ¹⁾
VDI 40	PSC 63	105	90			1,420.10	06326 ¹⁾
VDI 50	PSC 50	91	85			1,347.50	05025 ¹⁾
VDI 50	PSC 63	105	100			1,420.10	06325 ¹⁾

1) Not ex-stock

90° VDI to HSK-T adapter

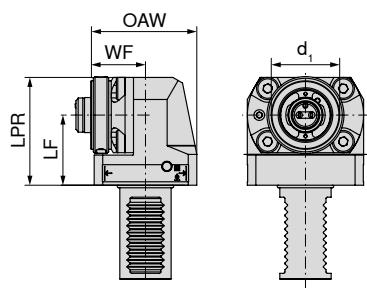


90°

NEW	Y7
Article no.	83 233 ...
£	1,289.64 04027 ¹⁾

Adapter	d_1	LPR	OAW	LF	WF
		mm	mm	mm	mm
VDI 30	HSK-T 40	65	60	41	25
VDI 40	HSK-T 40	75	90	51	34
VDI 40	HSK-T 63	90	85	53	45
VDI 50	HSK-T 63	97	85	55	45

1) Not ex-stock

VDI to HSK-T adapter

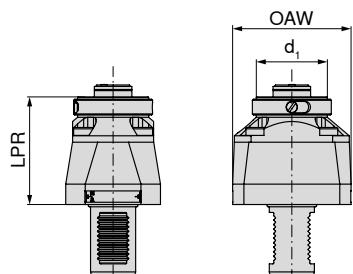


NEW	Y7
Article no.	83 234 ...
£	1,397.22 04027 ¹⁾

Adapter	d_1	LPR	OAW
		mm	mm
VDI 30	HSK-T 40	74	60
VDI 40	HSK-T 40	79	75
VDI 40	HSK-T 63	95	105
VDI 50	HSK-T 63	105	105

1) Not ex-stock

90° VDI to VDI adapter, double sided

▲ for rotating toolholder

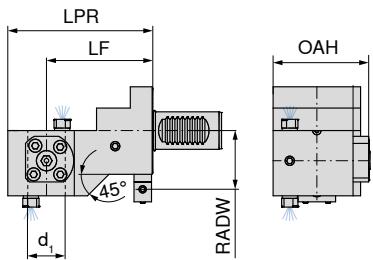


Adapter	d ₁	LPR	LF	OAH	RADW	Article no.	£	NEW Y7
		mm	mm	mm	mm			02028 ¹⁾
VDI 25	VDI 20	104	75	67.5	40	889.05	889.05	02028 ¹⁾
VDI 25	VDI 25	104	75	38.0	40			02528 ¹⁾
VDI 30	VDI 30	116	85	76.5	47			1,022.26 03027 ¹⁾
VDI 30	VDI 30	131	100	76.5	47			1,053.99 13027 ¹⁾
VDI 40	VDI 40	133	100	89.0	56			1,236.42 04026 ¹⁾
VDI 40	VDI 40	153	120	89.0	56			1,236.42 14026 ¹⁾

1) Not ex-stock

Boring bar holder with through coolant

▲ doubles = reciprocally interlocked VDI shank
▲ external coolant supply available

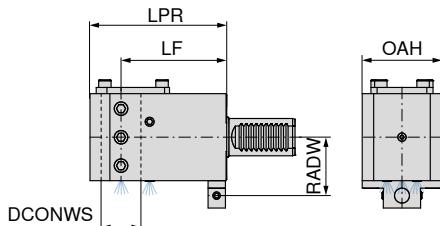


Adapter	DCONWS	LPR	LF	OAH	RADW	Article no.	£	double Y7
		mm	mm	mm	mm			02528 ¹⁾
VDI 25	25	100	75	60	40			704.29 02528 ¹⁾
VDI 30	32	110	85	64	47			825.28 03227 ¹⁾
VDI 30	32	125	100	64	47			857.17 13227 ¹⁾
VDI 40	40	130	100	76	56			1,036.65 04026 ¹⁾
VDI 40	40	152	120	76	56			1,071.49 14026 ¹⁾
VDI 50	50	155	120	98	64			1,236.42 05025 ¹⁾

1) Not ex-stock

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Boring bar holder, with offset, with through coolant

- ▲ doubles = reciprocally interlocked VDI shank
- ▲ external coolant supply available

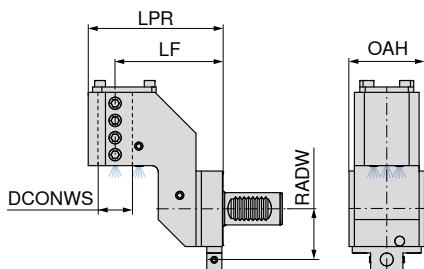



Adapter	DCONWS	LPR	LF	OAH	RADW	double	
						mm	mm
VDI 25	25	99.5	75	30	40	1,059.92	02528 ¹⁾
VDI 30	32	125.0	100	70	47	1,239.39	03227 ¹⁾
VDI 40	40	133.0	100	85	56	1,453.55	04026 ¹⁾

1) Not ex-stock

i With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Double boring bar holder with through coolant

- ▲ doubles = reciprocally interlocked VDI shank
- ▲ for use of two boring bars for main and sub-spindle machining
- ▲ external coolant supply available

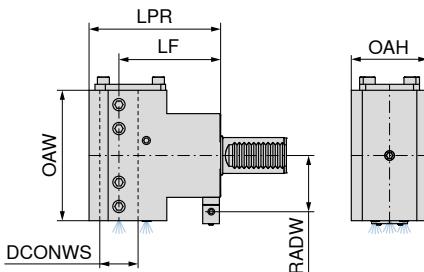



Adapter	DCONWS	LPR	LF	OAH	OAW	RADW	double	
							mm	mm
VDI 25	25	99.5	75	54	104	40	1,193.33	02528 ¹⁾
VDI 30	32	110.0	85	62	109	47	1,268.33	03227 ¹⁾
VDI 30	32	125.0	100	62	118	47	1,268.33	13227 ¹⁾
VDI 40	40	152.0	120	76	116	56	1,375.40	04026 ¹⁾

1) Not ex-stock

i With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Parting blade holder

▲ doubles = reciprocally interlocked VDI shank

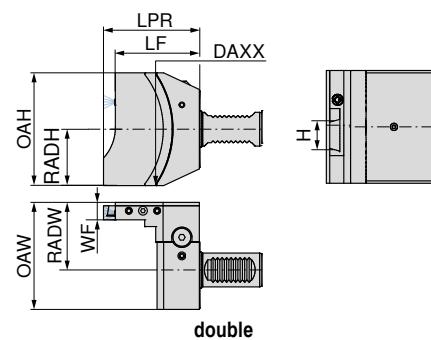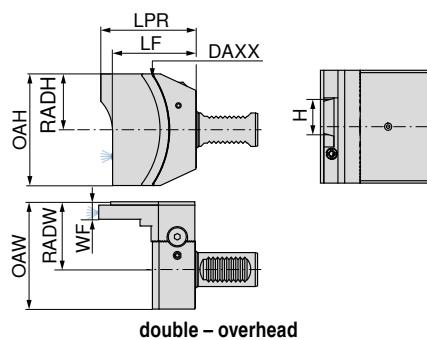

Adapter	LPR	LF	OAH	RADW	RADH	WF	DAXX	H	OAW	double – overhead	double
	mm	mm	mm	mm	mm	mm	mm	mm	mm	£	£
VDI 20	85.5	75.0	94	60	47	15.5	176	26	85	1,181.53	02629 ¹⁾ 1,181.53
VDI 25	85.2	74.7	73	43	39	15.5	176	32	72		1,181.53 03228 ¹⁾
VDI 25	85.2	74.7	73	43	39	15.5	176	26	72	1,181.53	02628 ¹⁾ 1,181.53 02628 ¹⁾
VDI 30	85.5	75.0	100	60	50	15.5	176	32	95	1,181.53	03227 ¹⁾ 1,181.53 03227 ¹⁾
VDI 30	85.5	75.0	100	60	50	15.5	176	26	95	1,181.53	02627 ¹⁾ 1,181.53 02627 ¹⁾
VDI 40	88.5	78.0	100	60	50	15.5	176	32	95	1,274.11	03226 ¹⁾ 1,274.11 03226 ¹⁾
VDI 40	88.5	78.0	100	60	50	15.5	176	26	95	1,274.11	02626 ¹⁾ 1,274.11 02626 ¹⁾

1) Not ex-stock


i With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

Bar pullers for disc turrets, radial

- ▲ Two adjustable, spring-mounted, replaceable grippers are fitted to the main body. Each of these is equipped with a carbide insert. The grippers are set to a slightly smaller diameter than the bar and then pressed onto the bar in an axial direction (x axis) by the tool turret.
- ▲ GA = Gripper set

Scope of supply:

Bar puller incl. GA 1 for VDI 16, and GA 3 from VDI 20

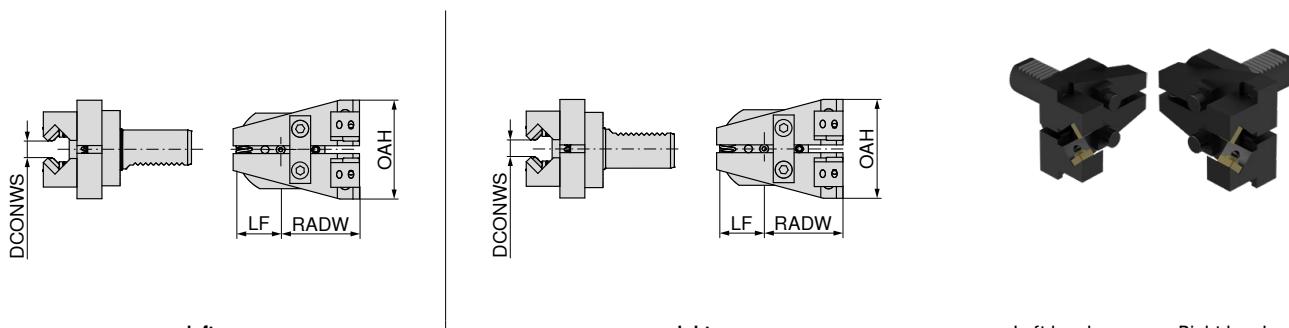

Adapter	DCONWS	LF	OAH	RADW	GA	Left-hand		Right-hand	
						mm	mm	mm	mm
VDI 16	2-22	28	74	35	1			NEW	Y7
VDI 20	2-42	34	85	61	3			Article no.	Article no.
VDI 30	2-42	34	105	61	3-4			80 309 ...	80 306 ...
VDI 40	2-65	34	125	61	3-4			£	£
								1,654.11	01600
								1,954.96	02000
								1,954.96	03000
								2,735.61	04000
								2,735.61	04000

Bar pullers for star turrets

- ▲ Two adjustable, spring-mounted, replaceable grippers are fitted to the main body. Each of these is equipped with a carbide insert. The grippers are set to a slightly smaller diameter than the bar and then pressed onto the bar in an axial direction (x axis) by the tool turret.

- ▲ 90° angle head
- ▲ GA = Gripper set

Scope of supply:


Bar puller with GA 3



Adapter	DCONWS	LPR	LF	WF	GA	Left-hand		Left-hand	
						mm	mm	mm	mm
VDI 30	2-42	129	122.5	37.0	3-4			NEW	Y7
VDI 40	2-65	149	142.5	41.5	3-4			Article no.	Article no.
								80 310 ...	80 310 ...
								£	£
								2,147.58	03000
								2,806.77	04000

Gripper accessories


- ▲ For bar pullers 80 306 ... / 80 309 ... / 80 310 ...
- ▲ Price per pair



GA	DCONWS mm	OAL mm	OAW mm	OAH mm	NEW Y7	
					Article no.	£
1	2-22	24.5	13	58	80 312 ...	357.81 12200
3	2-42	26.0	22	86		357.81 14200
4	42-65	29.5	22	102		478.77 16500

Cleaning propeller

- ▲ Chip and emulsion removal or drying processes via the tool spindle
- ▲ Simple replacement of the rotor blades

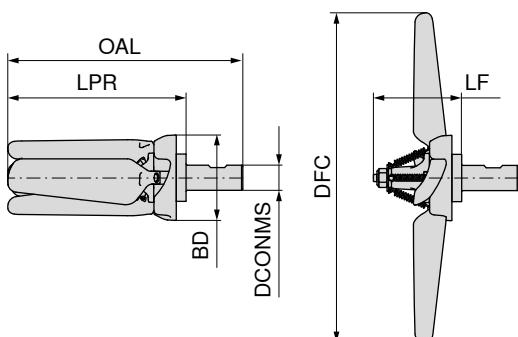

IK central

NEW Y7

Article no.

80 399 ...

£

428.75 02000

DCONMS	OAL	LPR	LF	DFC	BD	RPMX
mm	mm	mm	mm	mm	mm	1/min.
20	186.3	141.3	69.75	254	67.68	5000 - 8000

Y7	Y7
Rotor blade	Rotor blade kit
Article no. 80 399 ...	Article no. 80 399 ...

£ 52.60 30100 £ 203.28 30200

for Article no.
80 399 02000

TorqueFix® key

- ▲ With fixed torque
- ▲ Ergonomic key handle, extremely easy to use thanks to compact design
- ▲ Specially designed for difficult to access screws and constricted openings
- ▲ Click signal when the set torque value is reached
- ▲ Standards: DIN EN ISO 6789
- ▲ Accuracy: ± 6%, traceable to national standards

Scope of supply:

incl. Plastic box and inspection report



TQX	DRVS	NEW Y7	Article no.	80 392 ...	£
Nm	mm				
0,5	4	74.04	00500		
0,6	4	74.04	00600		
0,9	4	74.04	00900		
1,1	4	74.04	01100		
1,2	4	74.04	01200		
1,4	4	74.04	01400		
2,0	4	74.04	02000		
2,5	4	74.04	02500		
3,0	4	74.04	03000		
3,8	4	74.04	03800		
4,0	4	74.04	04000		

Replaceable Blade for TORX®

▲ 75 mm long



NEW Y7

Article no.
80 394 ...

£ 6.04 00600
6.04 00700
6.04 00800
6.04 00900
6.04 01000
6.04 01500
6.04 02000
6.04 02500

TQX	OAL	Size	DRVS
Nm	mm		mm
0,6	75	T06	4
0,9	75	T07	4
1,3	75	T08	4
2,5	75	T09	4
3,8	75	T10	4
5,5	75	T15	4
8,0	75	T20	4
8,0	75	T25	4

Interchangeable blade for Allen keys

▲ 75 mm long



TQX	OAL	Size	DRVS	NEW Y7	Article no.	80 393 ...	£
Nm	mm		mm				
0,9	75	SW1,5	1,5	6.04	01500		
1,8	75	SW2	2	6.04	02000		
3,8	75	SW2,5	2,5	6.04	02500		
5,5	75	SW3	3	6.04	03000		
8,0	75	SW4	4	6.04	04000		

Replaceable Blade for TORX PLUS®

▲ 75 mm long



NEW Y7

Article no.
80 395 ...

£ 6.04 00600
6.04 00700
6.04 00800
6.04 00900
6.04 01000
6.04 01500
6.04 02000
6.04 02500

TQX	OAL	Size	DRVS
Nm	mm		mm
0,8	75	T06-IP	4
1,3	75	T07-IP	4
2,0	75	T08-IP	4
3,0	75	T09-IP	4
4,5	75	T10-IP	4
6,6	75	T15-IP	4
8,0	75	T20-IP	4
8,0	75	T25-IP	4

Allen keys with cross handle – set

▲ 7-piece Allen key set in workbench stand



NEW Y7

Article no.
80 397 ...

£ 72.30 99900

Size
SW2, SW2,5, SW3, SW4, SW5, SW6, SW8


Our current valid terms and conditions apply which can be found on our website. Images and prices are valid, subject to corrections due to technical improvements or further developments as well as general mistakes and typographical errors.

UNITED. EXPERIENCED. METAL CUTTING.



SPECIALIST FOR INDEXABLE INSERT TOOLS
FOR TURNING, MILLING AND GROOVING

The product brand CERATIZIT stands for high-quality indexable insert tools. The products are characterized by their high quality and contain the DNA of many years of experience in the development and production of carbide tools.

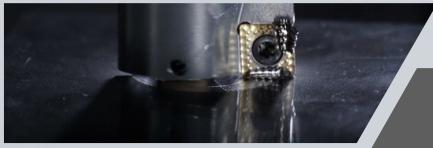

THE QUALITY LABEL FOR
EFFICIENT BORE PRODUCTION

High-precision drilling, reaming, countersinking and boring is a matter of expertise: efficient tooling solutions for drilling and mechatronic tools are therefore part of the KOMET brand name.



EXPERTS FOR ROTATING TOOLS,
TOOL HOLDERS AND CLAMPING SOLUTIONS

WNT is synonymous with product diversity: solid carbide and HSS rotating tools, tool holders and efficient workholding solutions are all part of this brand.



CUTTING TOOLS
FOR THE AEROSPACE INDUSTRY

Solid carbide drills specially developed for the aerospace industry bear the product name KLENK. The highly specialized products are specifically designed for machining lightweight materials.

CERATIZIT UK & IRELAND LTD

Europa Link \ UK-Sheffield S9 1XU

Tel.: +44 114 242 8 820

info.uk@ceratizit.com \ www.ceratizit.com

