



It couldn't be easier  
**Ordering via the  
Online Shop**

<http://cuttingtools.ceratizit.com>



Competent advice also available on call

**Application engineers  
with know-how**


Monday to Friday from 8:00 am – 6:00 pm  
Freephone Number: 0800 073 2075  
Email: [techsupport.uk@ceratizit.com](mailto:techsupport.uk@ceratizit.com)



Placing your order is quick and easy

**Customer Service Centre**

Freephone Number: 0800 073 2073  
Email: [info.uk@ceratizit.com](mailto:info.uk@ceratizit.com)

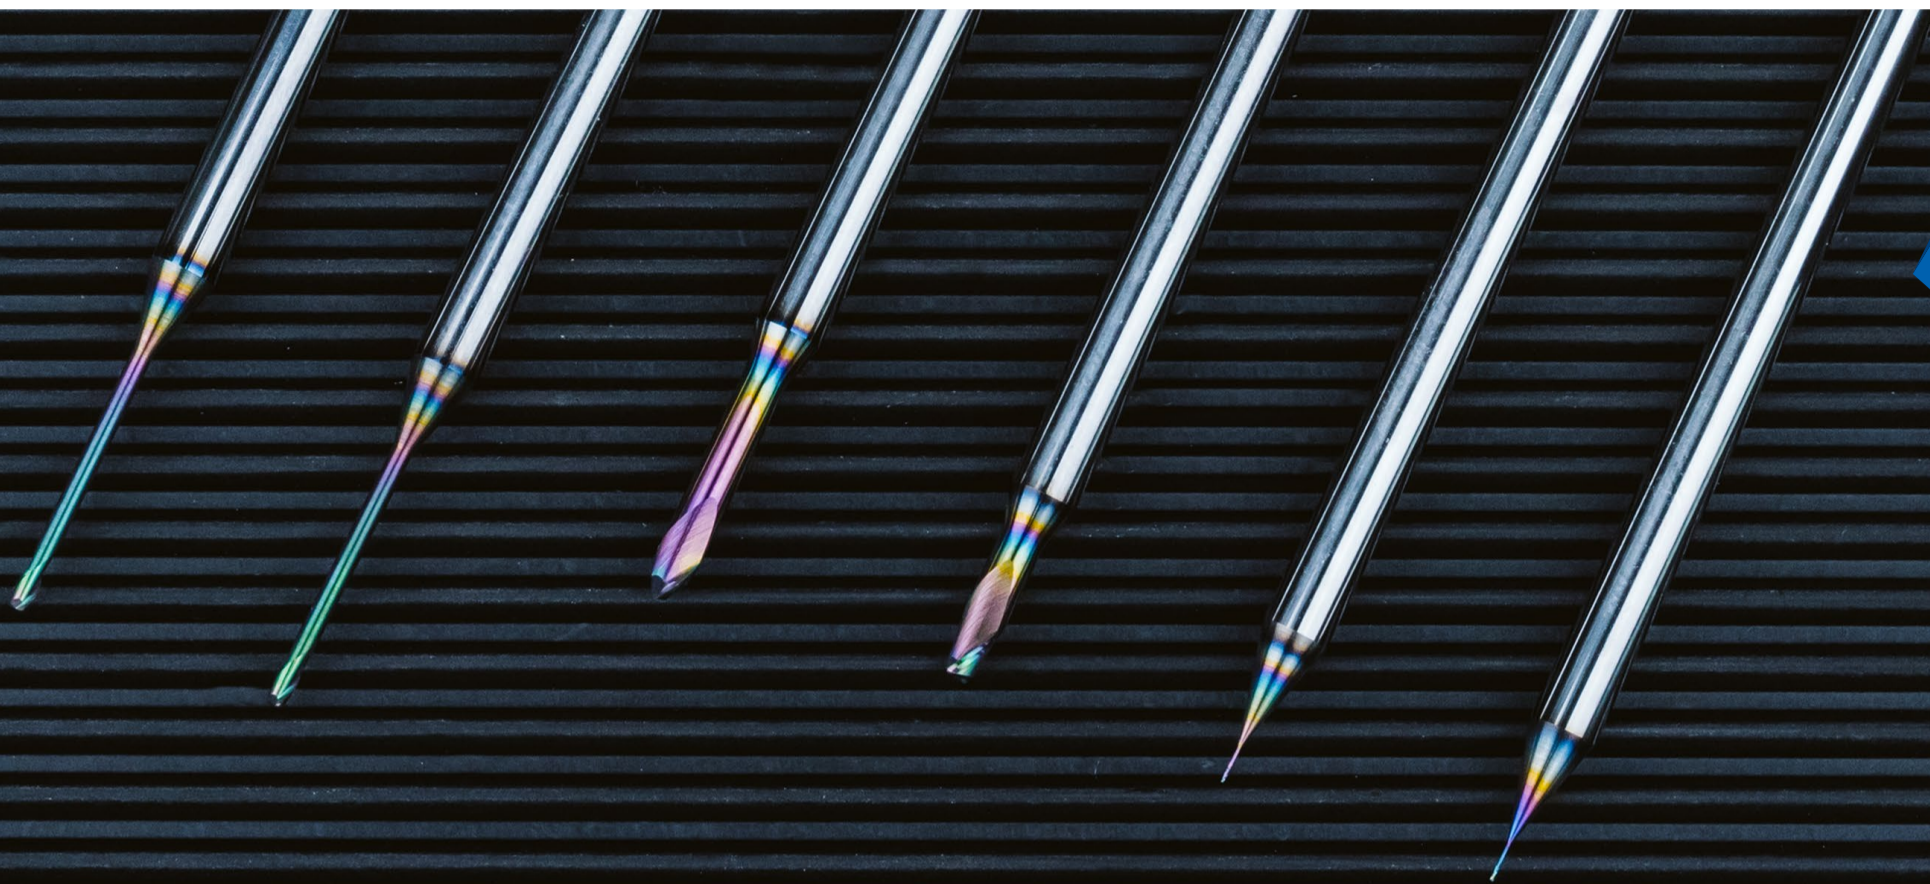

# Small-scale aluminium machining

with AluLine – Micro

# SPECIAL SELECTION

VALID: 01.12.2024 – 28.02.2025

CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

**Tooling a Sustainable Future**

[ceratizit.com](http://ceratizit.com)



**CERATIZIT**  
GROUP

# AluLine – Micro

**WNT**

## Micro cutter for complex micro components

AluLine – Micro: with DLC coating and minimal tolerances

Workpieces are getting smaller all the time – from the medtech sector, to the latest smartphones, through to elegant watch cases. This means the tools used to make these components are going miniature as well. So we decided to completely redesign the micro cutters in our AluLine – Micro range and adapt them to the industry's requirements.

## Advantages of the AluLine – Micro cutters

- ▲ Latest geometry
- ▲ Polish grinding for uniform cutting edges and optimal chip removal
- ▲ Wear-resistant, thin and ultra-smooth DLC coating
- ▲ Outstanding price-performance ratio
- ▲ Extensive, integrated range up to overhang lengths of 12xD
- ▲ Also suitable for shrinking with shank diameter of 4 mm
- ▲ Smallest tolerances, for maximum contour quality on the component (3 µm at diameter of 0.2 mm)

Corner chamfer

Torus

Full Radius

## Large portfolio of micro tools for machining aluminium

We offer a range of tool variants for AluLine – Micro:

- ▲ Radius and torus cutters, plus end mills with corner chamfer
- ▲ Various shank versions and geometries
- ▲ Diameters ranging from 0.2 mm to 3.0 mm
- ▲ Overhang lengths from 3xD to 12xD

With this product range, CNC machinists can be confident they have the right tool for most micro-cutting jobs involving aluminium alloys, copper and other non-ferrous metals.



[cts.ceratizit.com/gb/en/aluline-micro](https://cts.ceratizit.com/gb/en/aluline-micro)







## TABLE OF CONTENTS



### Customer Case Study

Page 6+7



### Made in Sheffield

Page 8+9



### SPECIAL OFFERS

Page 10



### HSS drilling

Page 12+13

Further tools can be found in the main catalogue, chapter 1



### Solid carbide drilling

Page 15–25

Further tools can be found in the main catalogue, chapter 2



### Indexable insert drills

Page 27–30

Further tools can be found in the main catalogue, chapter 3



### Reaming

Page 32–34

Further tools can be found in the main catalogue, chapter 4



### HSS Taps

Page 36


Further tools can be found in the main catalogue, chapter 6



### Thread milling cutters

Page 38


Further tools can be found in the main catalogue, chapter 7



### Thread turning

Page 40

Further tools can be found in the main catalogue, chapter 8



### Turning Tools

Page 42–48


Further tools can be found in the main catalogue, chapter 9



### EcoCut

Page 50

Further tools can be found in the main catalogue, chapter 10



### Grooving Tools

Page 52+53

Further tools can be found in the main catalogue, chapter 11



### Miniature turning tools

Page 55–57

Further tools can be found in the main catalogue, chapter 12



### Solid Carbide milling cutters

Page 59–72

Further tools can be found in the main catalogue, chapter 14



### Milling tools with indexable inserts

Page 74–82

Further tools can be found in the main catalogue, chapter 15



### Rotating toolholders

Page 84–93

Further tools can be found in the Catalogue – Clamping technology, chapter 16



### Toolholders, static + driven tools

Page 94

Further tools can be found in the Catalogue – Clamping technology, chapter 16



### CentriClamp – ZSG 4

Page 95

Further tools can be found in the Catalogue – Clamping technology, chapter 17


### Colour code information

P	Steel
M	Stainless steel
K	Cast iron
N	Non-ferrous metals
S	Heat-resistant
H	Tempered steel
O	Non metal materials


## SEE THE NEW SPECIAL SELECTION E-CATALOGUE



Download your e-Catalogue here

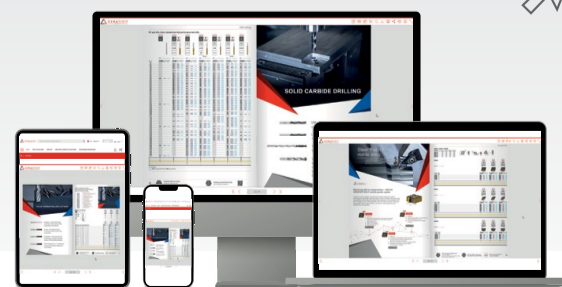

[cts.ceratizit.com/gb/en/special-selection](https://cts.ceratizit.com/gb/en/special-selection)



Fully simultaneous 5-axis VMCs.  
Specialising in the motorsport  
industry from design to  
manufacture.

Complexed  
machining using  
CERATIZIT  
tooling.

## CERATIZIT PUTS ALITECH IN POLE-POSITION


Based in Silverstone, a short walk from the world-famous race circuit, Alitech Precision is a subcontract design, concept delivery and manufacturing company that specialises in the motorsport industry. To serve this demanding 'fast-turnaround' market, Alitech Precision has invested in high-end machine tools, CAM software and cutting tools from CERATIZIT.

Alitech opened its doors for business in 2014 with a 3-axis machining centre and CAM package. As the business evolved, it acquired larger bed machines with 4th-axis rotary units before moving to fully simultaneous 5-axis VMCs. Specialising in the design of motorsport solutions and taking concepts through design to manufacture in the shortest possible time, the company works with everything from high-performance road cars to F1 teams in the 'motorsport valley'. With high-precision, impeccable quality and lightning-fast turnaround times a customer pre-requisite, Alitech demands the same from its suppliers – that is why the company relies on CERATIZIT for its cutting tool solutions.

Looking at how the company has grown since its inception, Alitech Precision Parts Ltd Managing Director Darren Cudd says: "We started with conventional entry-level machines and as we got into 5-axis machining, we quickly realised you get what you pay for. We haven't looked back since we bought our first Hermle machine and we now have four with a fifth machine on order."

Discussing the relationship with CERATIZIT, Darren adds: "The relationship with CERATIZIT is not too different to what we have with our customers. We manufacture parts to a very high level and we need very good tooling to do that, especially some of the more specialised tools like long gun drills and bespoke cutters. We work closely with Nev, our CERATIZIT engineer, and we have an ongoing unofficial competition. If Nev gives me a number regarding machining parameters – I always have to try and beat it. Luckily, we know that our machines are more than capable of doing what Nev suggests concerning parameters, so we always try to push as hard as we can."

The Northamptonshire company machines a diverse range of materials and the CERATIZIT team is always on hand to meet any challenge. As Darren says: "We are on board with a lot of racing teams and this has changed the nature of our machining. For example, our pallet-loaded Hermle C22 UP machine spent 4.5 months straight, just cutting titanium through the winter off-season rush. It's been a fantastic learning curve for us and Nev has been there all the way recommending the right tools. We got dialled-in on speeds and feeds pretty quickly and we are getting excellent tool life, which has been above what we were expecting to see. So, we couldn't be happier with the tools from CERATIZIT."

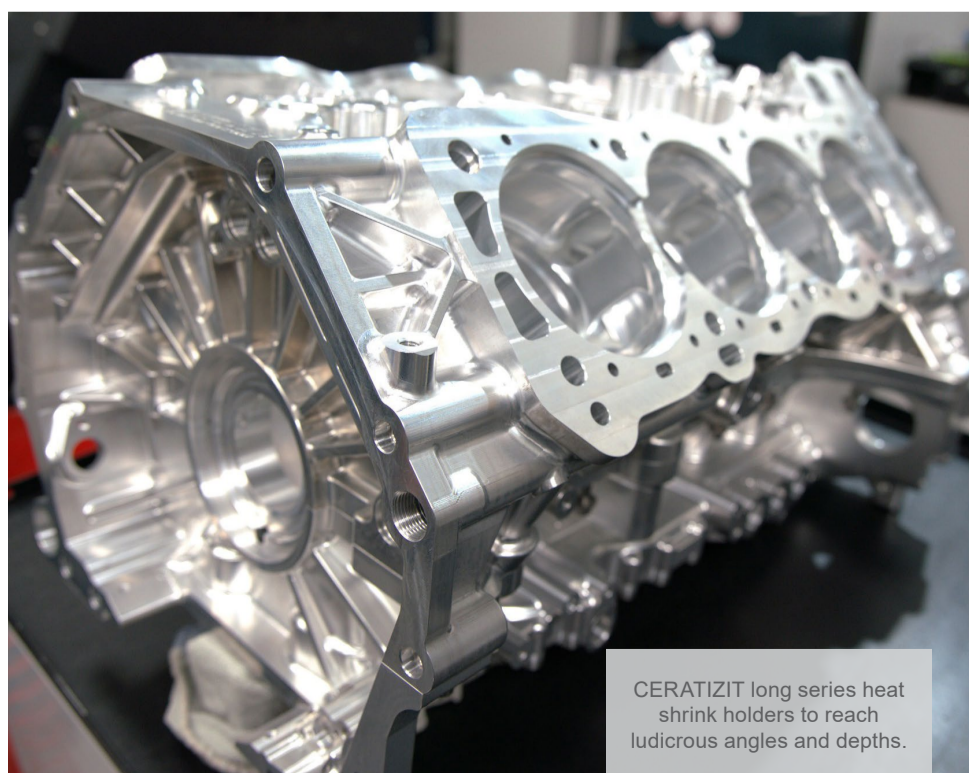

CERATIZIT long series heat  
shrink holders to reach  
ludicrous angles and depths.

As a forward-thinking company in a fast-paced sector, Alitech is happy to sacrifice tool longevity for productivity rates. Commenting on this, Darren says: "Being in the motorsport and F1 industry, parts are often required in less than 24 hours, so we are always looking at the bottom line. The hourly rate of the machine is typically more than the cost of the tool that will cut the part. So, it's simple math – if we're going to blow two tools to make a job in half an hour instead of 1.5 hours, it's a simple equation. However, the quality and longevity of the CERATIZIT tools always go beyond our expectations."

Looking at specific cutting tools, Darren highlights the performance of the CERATIZIT 3-flute rippers, saying: "We have some large parts that are roughed on a 3-axis before 5-axis machining. The roughing cycle was around 4 hours and this is now down to less than 1.5 hours. This is credit to the length of the flute and how hard you can push the CERATIZIT rippers. We now find that we are limited by the power of the spindle rather than the tools."

As a company that operates around the clock, Alitech has invested in a CERATIZIT ToolSupply vending solution to ensure that production is always running. Commenting on this, Darren says: "The vending solution has been a 'game changer'. We can be running automated manufacturing on our 18 pallet machine and we may have 5 or 6 sister tools for each tool on that job. Even if we pre-order tools on what we think we will need, things don't always work out as you wish. It is here that the vending machine comes in as a safety net to make sure our machines are always running – its removed tool breakages as a 'failure mode' from our business and saved our lives a few times already."

It is often said in the machining fraternity that Centro-P or ER32 toolholders are not suitable for rough machining, Alitech has not only debunked the myth, but it has taken it a step further – applying Weldon Lock toolholders from CERATIZIT to eliminate tool 'pull-out'. Darren suggests: "Traditionally, you look at two factors when roughing a job. Firstly, can the spindle turn the tool, and secondly, will the tool take the stress before it breaks? We found the limits on both of those factors. We were pushing so hard that a third concern arose - are you pulling the tool out of the collet during machining? Centro-P's are fantastic but when you lean on them as hard as we do, even they can pull out of the machine. To overcome this challenge, Nev recommended the CERATIZIT Weldon shank collets. They drop straight into the Centro-P, lock onto the Weldon shank and we have achieved some pretty ludicrous numbers on how hard we can rough machine jobs without ever pulling a tool out of the collet."

"We also use the CERATIZIT shrink-fit system for machining the large complex jobs that other machine shops will shy away from. This includes jobs like engine blocks where we need very long series heat shrink holders to reach ludicrous angles and depths."

CERATIZIT tooling now accounts for 95% of the tooling supplied at Alitech. Recalling the incremental switch from a multitude of suppliers, Darren recalls: "Time is money and we are often here six or seven days a week. In the busy seasons, we really don't have a spare hour to call around cutting tool companies for products and support. The CERATIZIT website and App just make it so easy to jump on, find exactly what you want within two or three minutes, click 'buy' and it's here the very next day. CERATIZIT really is a 'one-stop-shop' and we now buy everything from end mills and ball nose cutters to specialist titanium drills, long gun drills, T-slot cutters, collets, shrink fit and much more."

Adding to this, Sales & Production Manager at Alitech Ben Philips comments: "When I joined Alitech, we were predominantly buying Centric-P's and heat shrink holders for HSK and BT40 machines, but CERATIZIT helped us to diversify from primarily aluminium machining to heavier metals and superalloys."

Looking to the future, Darren concludes: "We cannot get another ounce of machinery into our factory, so we have been holding off for the last year or two to try and make a big leap. We will make this huge leap to a site that would be five times larger than what we currently have, from 3,500 to 14,000sq/ft. As we evolve, our success will be reliant upon the strong relationships we have with both our customers and our supply chain partners like CERATIZIT."


### ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

**Scope of supply:**

Holder **without nut, without backstop**

Centro-P WNT \ Performance



G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet	84 524 ... PG Y8	
	mm	mm	mm	mm	mm		£	£
BT 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	210	<del>186.01</del> 61.89
BT 40	1 - 10	90	30	120	30 - 50 (29 - 36)	426E (ER16)	310	<del>200.42</del> 72.38
BT 40	1 - 10	120	30	140	29 - 45 (29 - 35)	426E (ER16)	410	<del>266.44</del> 99.66
BT 40	1 - 10	150	30	180	29 - 45 (29 - 32)	426E (ER16)	510	<del>323.57</del> 107.00
BT 40	2 - 16	60	40	92	44 - 64 (36 - 46)	430E (ER25)	116	<del>244.05</del> 70.28
BT 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	216	<del>186.01</del> 61.89
BT 40	2 - 16	90	40	91	42 - 59 (36 - 41)	430E (ER25)	316	<del>220.42</del> 72.38
BT 40	2 - 16	120	40	91	40 - 65 (36 - 47)	430E (ER25)	416	<del>220.42</del> 72.38
BT 40	2 - 16	150	40	100	40 - 64 (36 - 45)	430E (ER25)	516	<del>244.05</del> 70.28
BT 40	2 - 16	200	40	150	40 - 64 (36 - 45)	430E (ER25)	616	<del>308.60</del> 132.17
BT 40	2 - 20	60	50	55	45 - 64 (42 - 46)	470E (ER32)	120	<del>211.05</del> 70.28
BT 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	220	<del>186.01</del> 61.89
BT 40	2 - 20	90	50	100	42 - 76 (42 - 52)	470E (ER32)	320	<del>220.42</del> 72.38
BT 40	2 - 20	120	50	110	42 - 71 (42 - 53)	470E (ER32)	420	<del>223.57</del> 107.00
BT 40	2 - 20	150	50	110	42 - 71 (42 - 53)	470E (ER32)	520	<del>247.03</del> 114.34

**1** LSCX = clamping depth without back stop screw for shanks  
 l<sub>2</sub> = with back stop screw 1, dimension in brackets ( ) = with back stop screw 2  
 dimension LPR when using tightening nuts with seals 4 mm longer

### Roll key



WNT \ Performance



### ER standard lock nut for precision collet chucks – Centro-P



WNT \ Performance

for lock nut	DLN	84 950 ... PG Y8		for collet	84 950 ... PG Y8	
	mm	£	£		£	£
426E / ER 16 CP	30	027	<del>145.80</del> 48.25	426E (ER16)	001	<del>72.00</del> 29.00
430E / ER 25 CP	40	054	<del>171.83</del> 56.65	430E (ER25)	003	<del>56.00</del> 32.00
470E / ER 32 CP + STD	50	056	<del>160.34</del> 53.50	470E (ER32)	005	<del>56.00</del> 35.00


### ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

**Scope of supply:**

Holder **without nut, without backstop**


Centro-P WNT \ Performance



G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet	84 414 ... PG Y8	
	mm	mm	mm	mm	mm		£	£
SK 40	1 - 10	130	30	140	28 - 50 (14 - 34)	426E (ER16)	510	<del>304.86</del> 100.70
SK 40	1 - 10	160	30	200	28 - 45 (16 - 31)	426E (ER16)	910	<del>326.47</del> 111.19
SK 40	2 - 16	45	40	85	35 - 60 (20 - 42)	430E (ER25)	816	<del>276.86</del> 91.26
SK 40	2 - 16	130	40	140	38 - 67 (21 - 49)	430E (ER25)	516	<del>321.33</del> 109.10
SK 40	2 - 16	160	40	118	35 - 60 (20 - 42)	430E (ER25)	916	<del>340.05</del> 115.39
SK 40	2 - 20	130	50	114	50 - 74 (36 - 55)	470E (ER32)	620	<del>321.33</del> 109.10
SK 40	2 - 20	160	50	119	52 - 70 (32 - 52)	470E (ER32)	920	<del>340.05</del> 115.39
SK 50	2 - 20	100	50	150	53 - 81 (35 - 63)	470E (ER32)	520	<del>507.89</del> 187.77
SK 50	2 - 20	160	50	200	53 - 83 (35 - 65)	470E (ER32)	720	<del>929.74</del> 305.26

Centro-P WNT \ Performance



G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet	84 424 ... PG Y8	
	mm	mm	mm	mm	mm		£	£
SK 40	1 - 10	70	30	110	28 - 45 (16 - 31)	426E (ER16)	102	<del>244.82</del> 73.82
SK 40	1 - 10	100	30	140	28 - 45 (16 - 31)	426E (ER16)	103	<del>201.49</del> 82.04
SK 40	2 - 16	70	40	110	35 - 60 (20 - 42)	430E (ER25)	162	<del>226.23</del> 73.82
SK 40	2 - 16	100	40	113	35 - 60 (20 - 42)	430E (ER25)	163	<del>301.49</del> 82.04
SK 40	2 - 20	50	50	85	52 - 70 (26 - 52)	470E (ER32)	201	<del>207.62</del> 77.92
SK 40	2 - 20	70	50	111	55 - 75 (42 - 62)	470E (ER32)	202	<del>241.43</del> 73.82
SK 40	2 - 20	100	50	114	52 - 70 (32 - 52)	470E (ER32)	203	<del>301.49</del> 82.04
SK 40	3 - 26	70	63	105	48 - 55	472E (ER40)	261 <sup>1)</sup>	<del>320.04</del> 98.42
SK 50	2 - 16	100	40	150	35 - 64 (20 - 48)	430E (ER25)	167	<del>555.05</del> 163.19

1) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change

## CENTRO-P WEDGE COLLET


To avoid pull out on really heavy-duty roughing operations use the special Centro-P wedge collet in diameters 12 & 16 mm



cuttingtools.ceratizit.com

## SPECIAL NETT PRICE\*

# £80

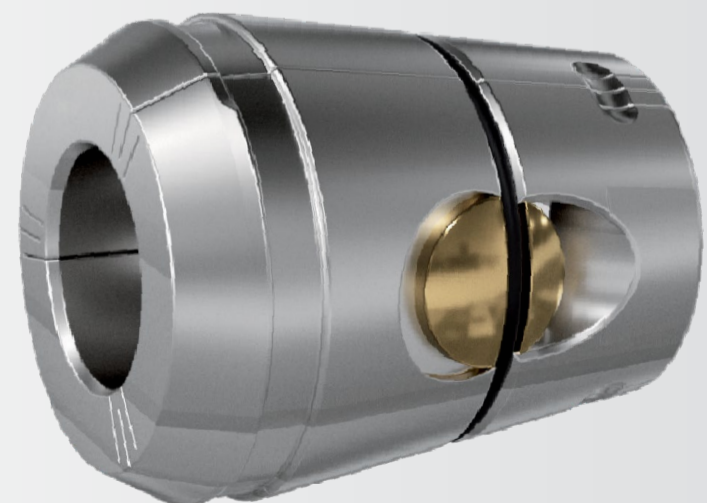

\*Art.No.  
83629120  
83629160



**Technical support: 0800 073 2 075**  
 3 time served engineers,  
 available from 8:00 am to 6:00 pm, Monday to Friday  
 Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield



MADE IN SHEFFIELD

**Made in Sheffield** aims to encourage local production and manufacturing companies to use Sheffield's name, and the reputation associated with it, to strengthen the city's strong, industrial present.

The accreditation is awarded to Sheffield-based companies which are known for their high-quality products and cutting-edge innovation.

## CERATIZIT UK & Ireland and Made in Sheffield

Having called Sheffield home for 25 years, **CERATIZIT UK & Ireland** received the Made in Sheffield accreditation back in 2023.

Hoping to carry on serving the proud words of '**Made in Sheffield**', all customer workholdings manufactured at the CERATIZIT UK & Ireland Technical Centre will now be marked with the '**Made in Sheffield**' accreditation.



SCAN ME







## G23 Engineering & The CERATIZIT Workholding and Fixturing Service

Although the MiS service is new, it has come about after increasing customer demand for bespoke fixtures and workholding.

A recent customer we helped with their specific requirements was G23 Engineering, based in Northampton. Nev Frisby, Technical Sales Engineer for CERATIZIT UK & Ireland, had discussed various workholding solutions with G23 on one of his regular visits to the company.


After getting a plan in place, Nev then worked in collaboration with Stephen Pennington, Projects Specialist Engineer, who designed and manufactured a prototype workholding at the Tech Centre.

Following the success of the prototype, the engineers at G23 ordered another 4 for their new Matsuura MX-330 machine tool!

Designed and machined by Stephen on the XYZ UMC-5X, these workholdings were fitted with our ZSG-4 80 vices for unbeatable performance.

Amazingly, the whole process, from idea, to design, to machining and then to delivery, took a matter of a few weeks. Within a month the workholdings were at work in the Matsuura machine.


STAY UP  
TO DATE

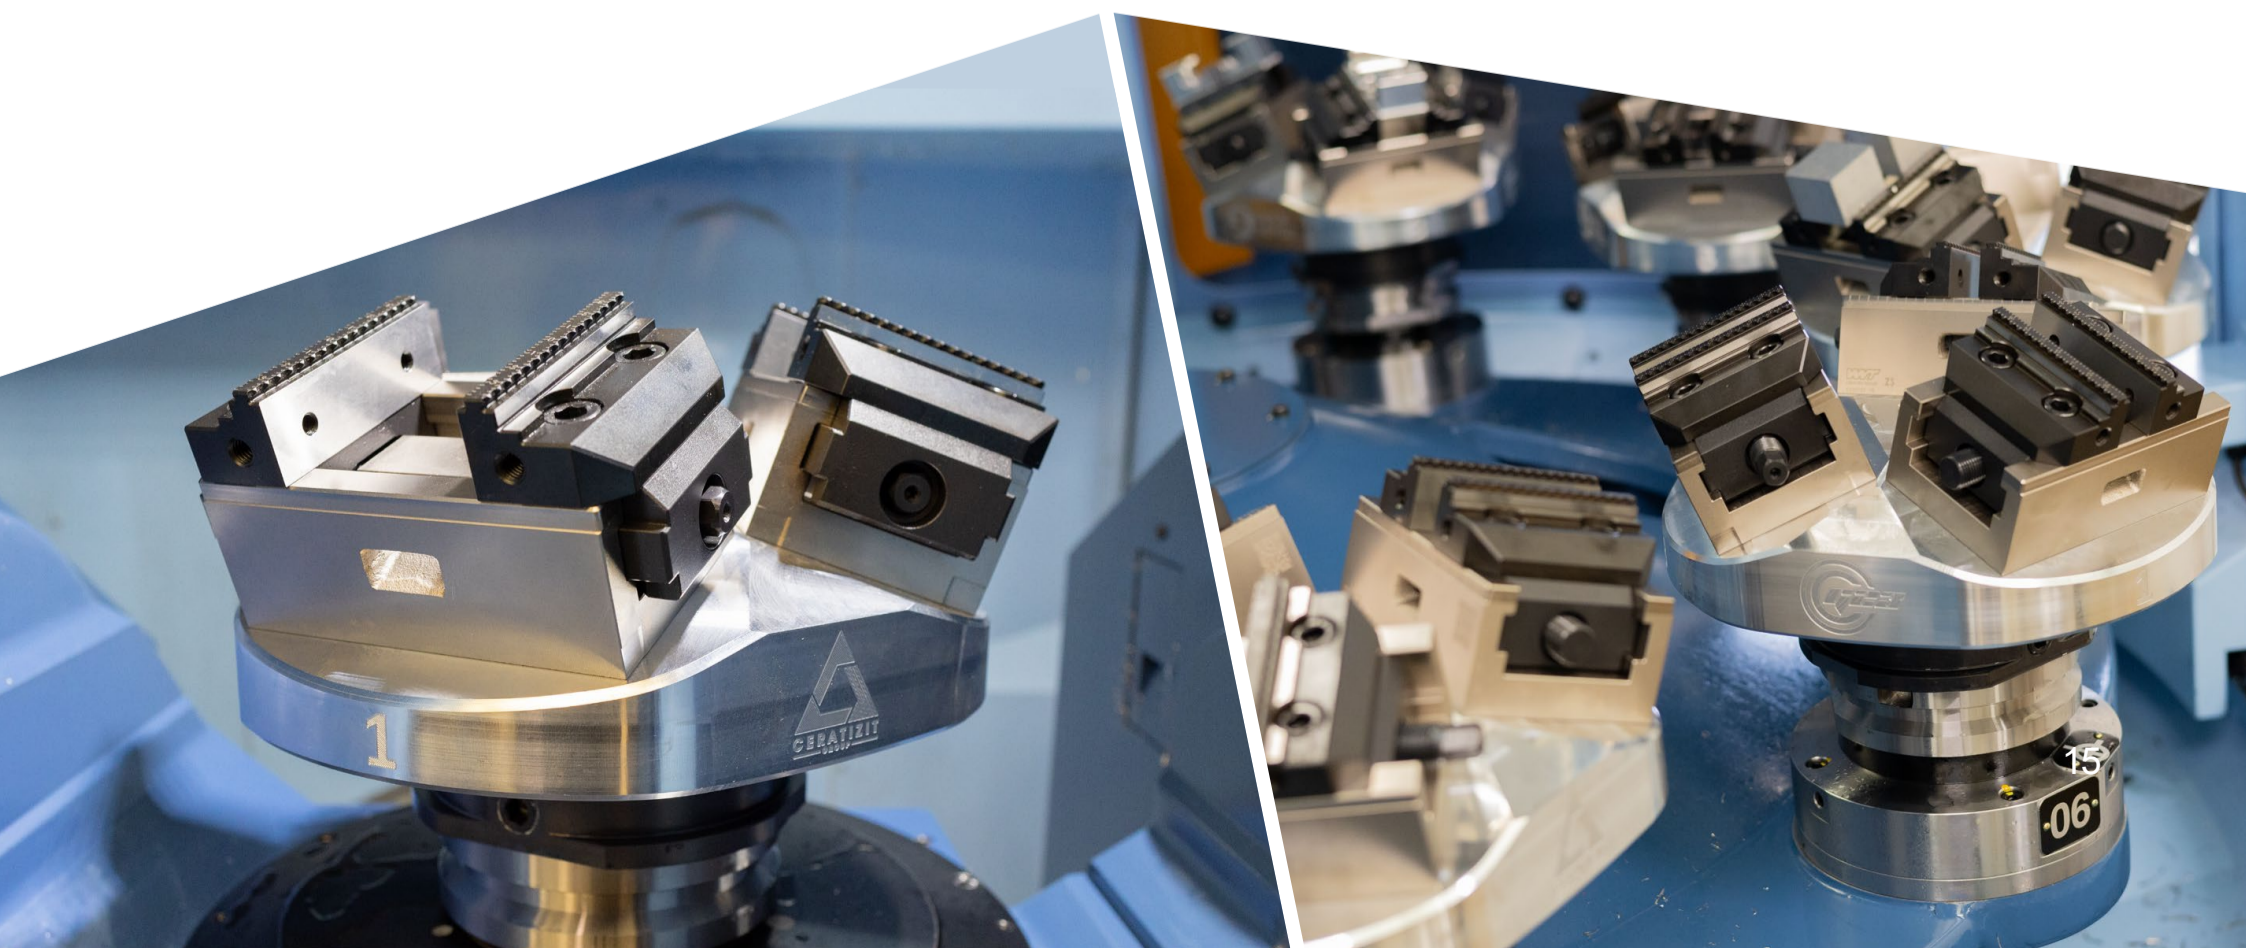

### Universal 3D-tester

- ▲ Quick and accurate positioning
- ▲ For locating and/or setting the zero point of the workpiece
- ▲ with adjustable concentricity
- ▲ Usable in all 3 axes (x, y, z)
- ▲ For all CNC and erosion machines (insulation between stylus and case)
- ▲ Reading of actual dimensions is independent of direction
- ▲ Reading precision 0.01 mm

**Scope of supply**  
3D tester including tracer insert and Allen key




<b>85 290 ...</b>	<b>PG XX</b>
£	£
100	<del>420.01</del> 283.23

Universal 3D-tester

### Universal 3D-Tester HQ

- ▲ fast and accurate positioning at reference edges
- ▲ Development of the existing universal 3D-Testers
- ▲ improved mechanics
- ▲ compact size
- ▲ characterised by over travel safety
- ▲ Functionality as with 85 290 100
- ▲ Accuracy 0,01 mm

**Scope of supply**  
3D tester including tracer insert and Allen key



<b>85 292 ...</b>	<b>PG XX</b>
£	£
100	<del>440.00</del> 283.23

Universal 3D-Tester HQ

### UltraMini – Set


- ▲ internal turning, grooving and chamfering



<b>73 085 ...</b>	<b>PG Y5</b>
£	£
999	<del>1,269.74</del> 293.72

Set

### Adjustable single angle milling cutter C 4500



Designation	DCONMS	DC	DCX	LH	BD	LPR	<b>50 690 ...</b>	<b>PG 2B/40</b>
	mm	mm	mm	mm	mm	mm	£	£
C490.20.R.01	16.0	1.6-11.1	20.1-23.6	32.0	18.65	23.9-34.6	<b>01600</b>	<del>181.08</del> 104.90
C490.26.R.01	20.0	1.1-14.1	26.6-31.5	37.0	25.00	38.2-40.6	<b>02000</b>	<del>213.57</del> 125.88

### Twist drill sets DIN 338 – Type N short

- ▲ In metal box
- ▲ In 0.1 mm steps




	Ø	<b>10 158 ...</b>	<b>PG T2</b>
	mm	£	£
0.1 mm steps	1.0–5.9	<b>050</b>	<del>96.04</del> 45.00
0.1 mm steps	6.0–10	<b>100</b>	<del>201.37</del> 90.00

### Cleaning propeller

- ▲ Chip and emulsion removal or drying processes via the tool spindle
- ▲ Simple replacement of the rotor blades

WNT \ Standard

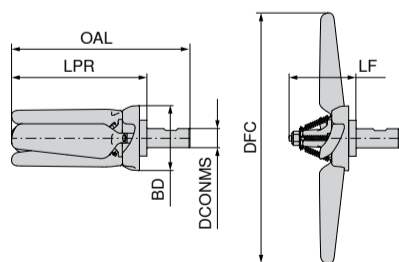

DCONMS	OAL	LPR	LF	DFC	BD	RPMX
mm	mm	mm	mm	mm	mm	1/min.
20	186.3	141.3	69.75	254	67.68	5000 - 8000

### Zero height setting gauge



Designation	Height	<b>85 900 ...</b>	<b>PG Y7</b>
	mm	£	£
Zero height setting gauge	100	<b>018</b>	<del>280.17</del> 78.68

### Set: MiniCut size 9

- ▲ 1 grooving insert – 73 310 210 hole Ø 9 mm
- ▲ 1 NC fine turning insert – 73 314 120 hole Ø 9 mm
- ▲ 2 inserts for copy turning – 73 386 136 hole Ø 9 mm – 73 322 236 hole Ø 9 mm
- ▲ 1 insert for chamfering and profiling – 73 334 110 hole Ø 9 mm
- ▲ 1 tool holder – 73 522 125
- ▲ 1 clamping key – 70 950 105



<b>73 528 ...</b>	<b>PG U1</b>
£	£
125	<del>347.20</del> 104.90

Set

### Assembly device for ISO adapters

- ▲ Aluminium



Collet chuck	<b>80 720 ...</b>	<b>PG Y7</b>
	£	£
SK 30	<b>030</b>	<del>265.76</del> 57.70
SK 40	<b>040</b>	<del>265.76</del> 62.94
SK 50	<b>050</b>	<del>442.49</del> 68.19

### Countersink 90°, DIN 335-C

- ▲ included in the set: 6.3 mm, 8.3 mm, 10.4 mm, 12.4 mm, 16.5 mm and 20.5 mm



<b>30 100 ...</b>	<b>PG U1</b>
£	£
999	<del>456.74</del> 31.47

Set

### Assembly fixture for tool holders


- ▲ gripping by roller
- ▲ secure clamping
- ▲ quick assembly, no additional clamping necessary

WNT \ Standard



<b>80 399 ...</b>	<b>PG Y7</b>
£	£
<b>02000</b>	<del>571.13</del> 141.62

IK central



Adapter	DCONWS	<b>80 722 ...</b>	<b>PG Y7</b>
	mm	£	£
HSK 32, PSC 32	32.0	<b>032</b>	<del>389.66</del> 125.88
HSK 40, PSC 40	40.0	<b>040</b>	<del>389.66</del> 125.88
MAS-BT 30	46.0	<b>046</b>	<del>336.94</del> 104.90
DIN 69871 / DIN 2080 - SK 30, HSK 50, PSC 50	50.0	<b>050</b>	<del>336.94</del> 104.90
DIN 69871 / DIN 2080 - SK 40, HSK 63, PSC 63, MAS-BT 40, ANSI-CAT 40	63.0	<b>063</b>	<del>336.94</del> 104.90
DIN 69871 - SK 50	97.5	<b>097</b>	<del>670.44</del> 209.80
HSK 100, MAS-BT 50, ANSI-CAT 50	100.0	<b>100</b>	<del>670.44</del> 209.80

**SPECIAL OFFER**  
**TWIST DRILL SETS**  
**SAVE 70%**  
**ONLY £10**  
**PER SET**



Art. Nr.: 10 107 999





# HSS DRILLING



UNI – universal geometry for all applications and materials up to 10xD.



WT – problem solver for difficult to machine materials and applications.



VX – high performance drill for all applications – nominal shank.

NC spot drills, factory standard and high-performance twist drills

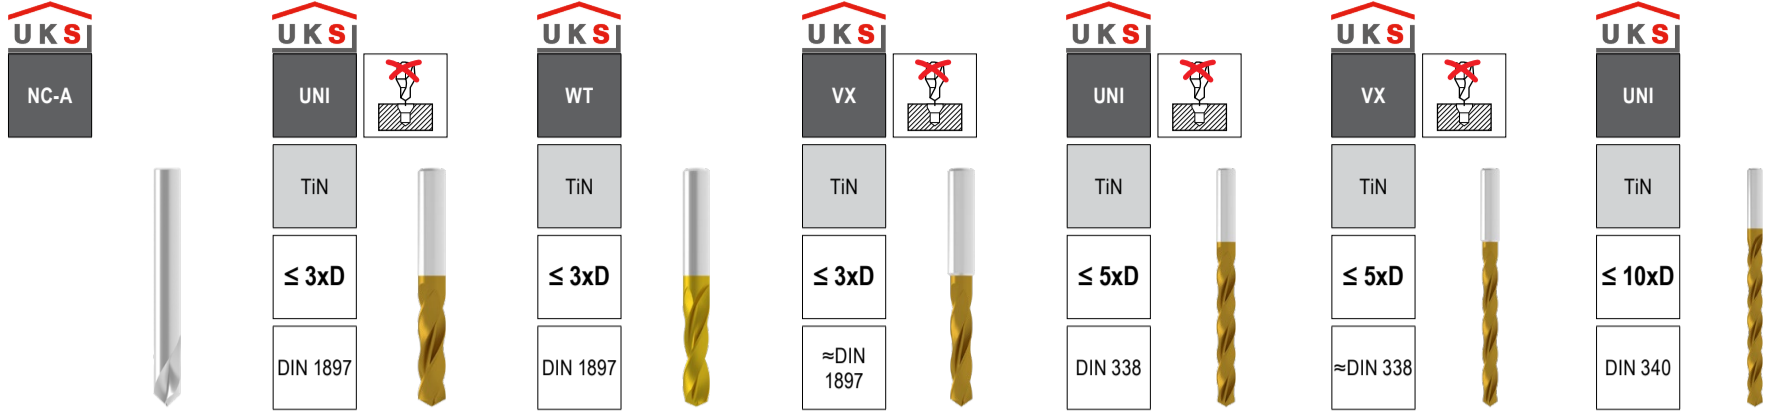


Table with columns for DC\_h8/h6 (mm), Product Line (e.g., 10 520, 10 107, 10 110, 10 122, 10 171, 10 124, 10 270), Material (P, M, K, N, S, H, O), Price (£), and Performance (PG, T2). It lists numerous drill sizes and their corresponding prices and performance metrics.

1) self-centering
Ø DC\_h8 for Type UNI, WT and VX / Ø DC\_h6 for Type NC-A







# SOLID CARBIDE DRILLING



UNI – for all materials and applications up to 12xD.



VA – for stainless and corrosion resistant steels up to 5xD.



TB – for all materials and applications from 16xD up to 50xD.



WTX Change – good solution for lathes with mis-alignment and lower powered machines. Cost effective solution in larger diameters above  $\text{\O} 20$  mm in 0.1 mm increments.



WPC Change Uni – High performance with low cost per hole in normal materials















WTX – High performance deep hole drills

- ▲ Pilot hole necessary
- ▲ Excellent alignment precision
- ▲ Secure chip evacuation



WNT \ Performance

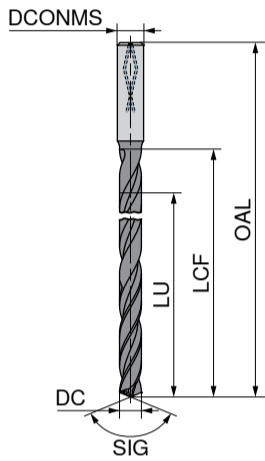


DC <sub>N7</sub> mm	11 016 ... PG T7/9G		11 017 ... PG T7/9G		11 020 ... PG T7/9G		11 021 ... PG T7/9G	
	£	£	£	£	£	£	£	£
2.0	<del>133.60</del>	133.22	<del>133.60</del>	133.22	<del>144.35</del>	140.57	<del>144.35</del>	140.57
2.2	<del>133.60</del>	133.22	<del>133.60</del>	133.22	<del>136.57</del>	136.37	<del>144.35</del>	140.57
2.3	<del>133.60</del>	133.22	<del>133.60</del>	133.22	<del>144.35</del>	140.57	<del>144.35</del>	140.57
2.4	<del>149.14</del>	148.96	<del>149.14</del>	148.96	<del>153.00</del>	152.11	<del>158.44</del>	158.40
2.5	<del>149.14</del>	148.96	<del>149.14</del>	148.96	<del>158.44</del>	158.40	<del>158.44</del>	158.40
2.7	<del>149.14</del>	148.96	<del>149.14</del>	148.96	<del>153.00</del>	152.11	<del>158.44</del>	158.40
2.8	<del>149.14</del>	148.96	<del>149.14</del>	148.96	<del>158.44</del>	158.40	<del>158.44</del>	158.40
3.0	<del>189.54</del>	188.82	<del>189.54</del>	188.82	<del>204.14</del>	203.51	<del>211.27</del>	210.85
3.2	<del>189.54</del>	188.82	<del>189.54</del>	188.82	<del>211.27</del>	210.85	<del>211.27</del>	210.85
3.3	<del>189.54</del>	188.82	<del>189.54</del>	188.82	<del>204.14</del>	203.51	<del>211.27</del>	210.85
3.5	<del>189.54</del>	188.82	<del>189.54</del>	188.82	<del>211.27</del>	210.85	<del>211.27</del>	210.85
3.8	<del>197.30</del>	197.21	<del>197.30</del>	197.21	<del>213.11</del>	212.95	<del>220.56</del>	220.29
4.0	<del>197.30</del>	197.21	<del>197.30</del>	197.21	<del>220.56</del>	220.29	<del>220.56</del>	220.29
4.2	<del>212.82</del>	211.90	<del>212.82</del>	211.90	<del>228.12</del>	227.63	<del>236.12</del>	236.03
4.5	<del>212.82</del>	211.90	<del>212.82</del>	211.90	<del>236.12</del>	236.03	<del>236.12</del>	236.03
4.8	<del>225.23</del>	224.49	<del>225.23</del>	224.49	<del>241.63</del>	241.27	<del>250.10</del>	249.66
5.0	<del>225.23</del>	224.49	<del>225.23</del>	224.49	<del>250.10</del>	249.66	<del>250.10</del>	249.66
5.5	<del>234.56</del>	233.93	<del>234.56</del>	233.93	<del>252.15</del>	251.76	<del>260.09</del>	260.15
5.8	<del>234.56</del>	233.93	<del>234.56</del>	233.93	<del>260.09</del>	260.15	<del>260.09</del>	260.15
6.0	<del>234.56</del>	233.93	<del>234.56</del>	233.93	<del>260.09</del>	260.15	<del>260.09</del>	260.15
6.5	<del>250.10</del>	249.66	<del>250.10</del>	249.66	<del>270.07</del>	277.99	<del>278.07</del>	277.99
6.8	<del>268.75</del>	268.54	<del>268.75</del>	268.54	<del>280.84</del>	298.97	<del>290.84</del>	298.97
7.0	<del>268.75</del>	268.54	<del>268.75</del>	268.54	<del>290.84</del>	298.97	<del>290.84</del>	298.97
7.5	<del>301.37</del>	301.06	<del>301.37</del>	301.06	<del>333.08</del>	333.58	<del>333.08</del>	333.58
7.8	<del>301.37</del>	301.06	<del>301.37</del>	301.06	<del>333.08</del>	333.58	<del>333.08</del>	333.58
8.0	<del>301.37</del>	301.06	<del>301.37</del>	301.06	<del>333.08</del>	333.58	<del>333.08</del>	333.58
8.5	<del>332.42</del>	331.48	<del>332.42</del>	331.48	<del>368.15</del>	367.15	<del>368.15</del>	367.15
8.8	<del>369.72</del>	369.25	<del>369.72</del>	369.25	<del>413.24</del>	412.26	<del>413.24</del>	412.26
9.0	<del>369.72</del>	369.25	<del>369.72</del>	369.25	<del>413.24</del>	412.26	<del>413.24</del>	412.26
9.8	<del>369.72</del>	369.25	<del>369.72</del>	369.25	<del>413.24</del>	412.26	<del>413.24</del>	412.26
10.0	<del>369.72</del>	369.25	<del>369.72</del>	369.25	<del>413.24</del>	412.26	<del>413.24</del>	412.26
10.2	<del>413.24</del>	412.26	<del>413.24</del>	412.26	<del>453.60</del>	453.17	<del>453.60</del>	453.17
10.8	<del>413.24</del>	412.26	<del>413.24</del>	412.26	<del>453.60</del>	453.17	<del>453.60</del>	453.17
11.8	<del>413.24</del>	412.26	<del>413.24</del>	412.26	<del>453.60</del>	453.17	<del>453.60</del>	453.17
12.0	<del>413.24</del>	412.26	<del>413.24</del>	412.26	<del>453.60</del>	453.17	<del>453.60</del>	453.17

P	●	●	●
M	●	●	●
K	●	●	●
N	●	●	●
S	○	○	○
H	○	○	○
O	○	○	○





WTX – High performance deep hole drills

- ▲ Pilot hole necessary
- ▲ Excellent alignment precision
- ▲ Secure chip evacuation



WNT \ Performance

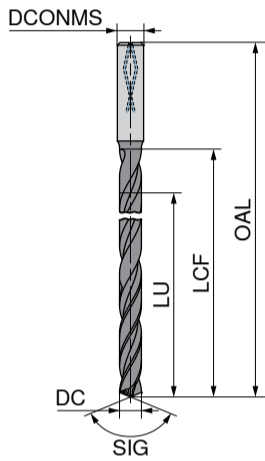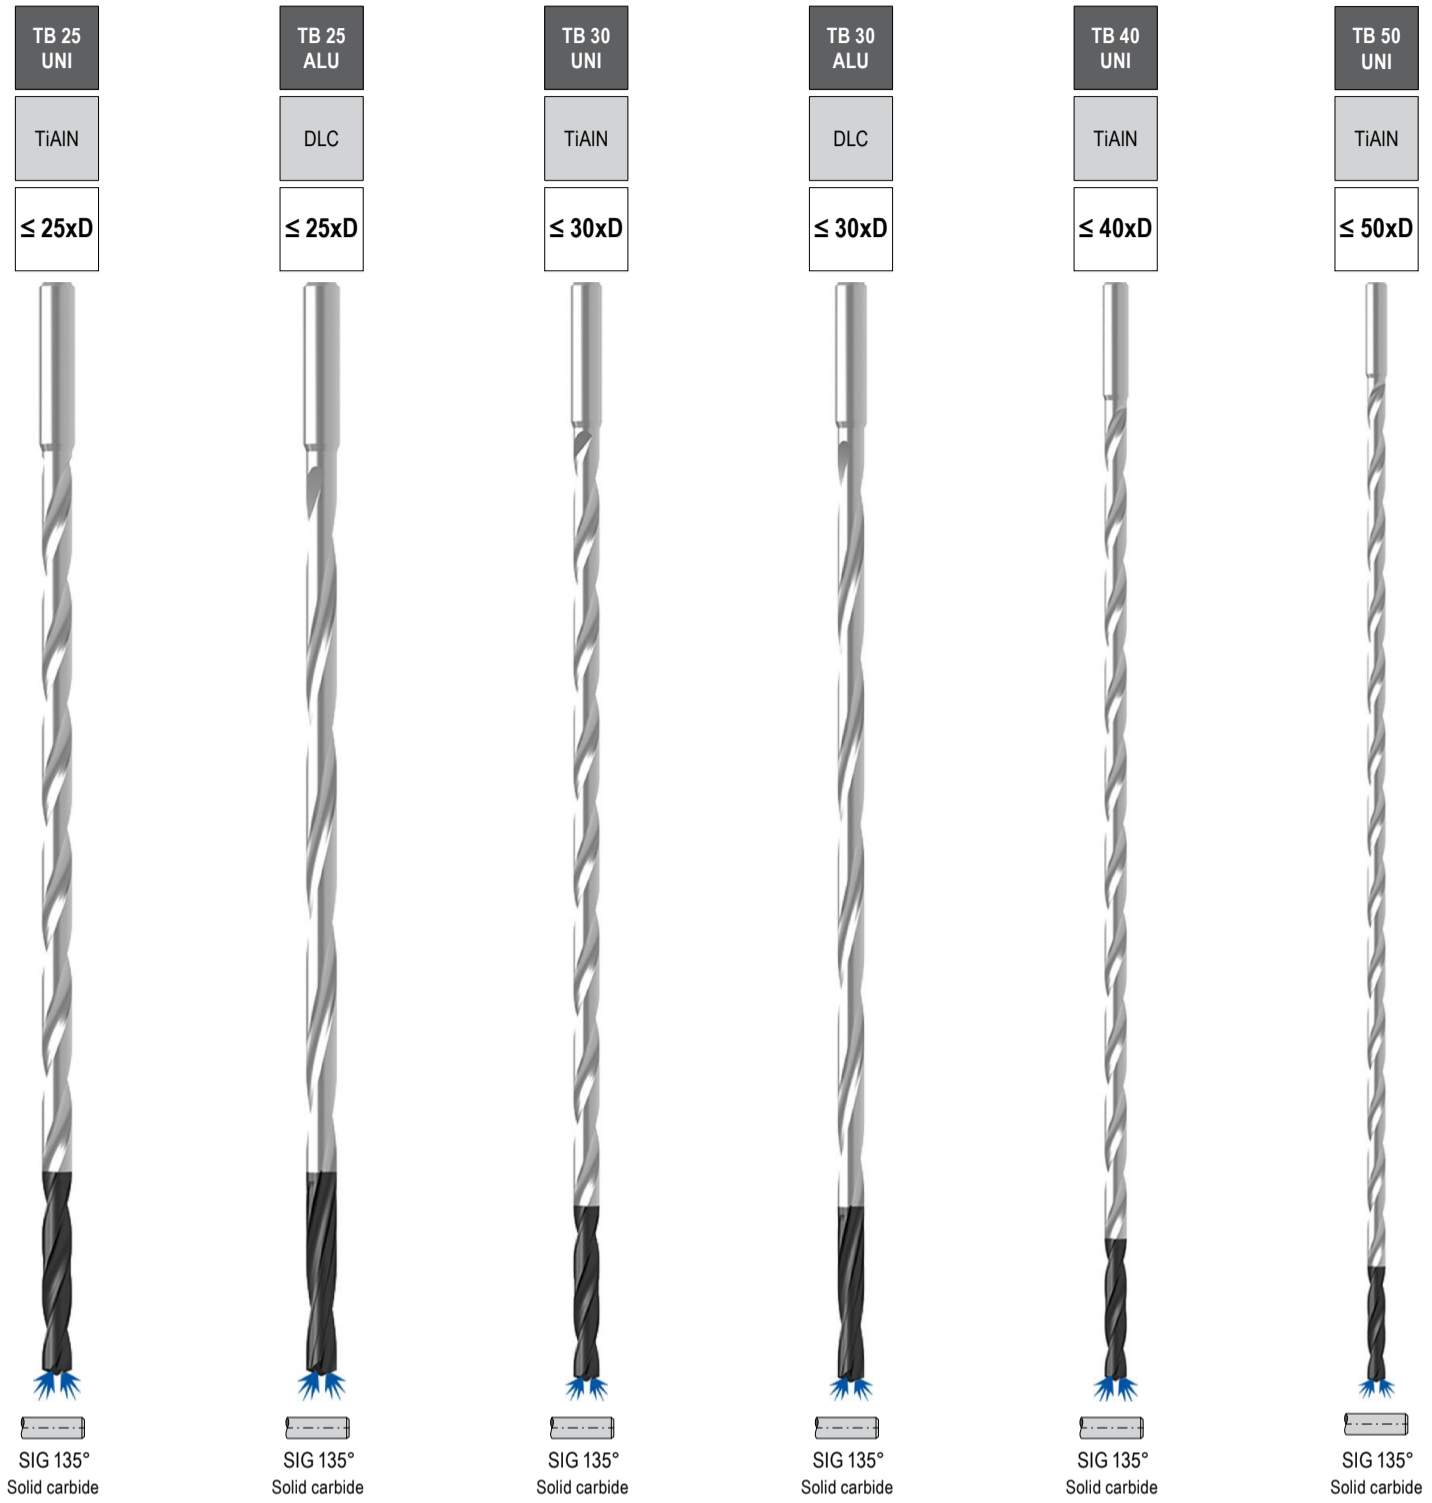

DC mm	11 025 ... PG T7/9G		11 026 ... PG T7/9G		11 030 ... PG T7/9G		11 031 ... PG T7/9G		11 040 ... PG T7/9G		11 050 ... PG T7/9G	
	£	£	£	£	£	£	£	£	£	£	£	£
2.0	<del>160.00</del>	150.01	<del>150.00</del>	150.01	<del>160.00</del>	159.45	<del>160.00</del>	159.45				
2.2	<del>160.00</del>	150.01	<del>150.00</del>	150.01	<del>160.00</del>	159.45	<del>160.00</del>	159.45				
2.3	<del>160.00</del>	150.01	<del>150.00</del>	150.01	<del>160.00</del>	159.45	<del>160.00</del>	159.45				
2.4	<del>170.87</del>	169.94	<del>170.87</del>	169.94	<del>186.42</del>	185.67	<del>186.42</del>	185.67				
2.5	<del>170.87</del>	169.94	<del>170.87</del>	169.94	<del>186.42</del>	185.67	<del>186.42</del>	185.67				
2.7	<del>170.87</del>	169.94	<del>170.87</del>	169.94	<del>186.42</del>	185.67	<del>186.42</del>	185.67				
2.8	<del>170.87</del>	169.94	<del>170.87</del>	169.94	<del>186.42</del>	185.67	<del>186.42</del>	185.67				
3.0	<del>245.42</del>	244.42	<del>245.42</del>	244.42	<del>313.00</del>	313.65	<del>313.00</del>	313.65	<del>399.21</del>	398.62	<del>542.15</del>	541.28
3.2	<del>245.42</del>	244.42	<del>245.42</del>	244.42	<del>313.00</del>	313.65	<del>313.00</del>	313.65				
3.3	<del>271.89</del>	271.69	<del>270.91</del>	269.59	<del>323.12</del>	323.09	<del>323.12</del>	323.09				
3.5	<del>271.89</del>	271.69	<del>270.91</del>	269.59	<del>323.12</del>	323.09	<del>323.12</del>	323.09				
3.8	<del>279.61</del>	279.03	<del>279.61</del>	279.03	<del>323.12</del>	323.09	<del>323.12</del>	323.09				
4.0	<del>279.61</del>	279.03	<del>279.61</del>	279.03	<del>323.12</del>	323.09	<del>323.12</del>	323.09	<del>399.21</del>	398.62	<del>542.15</del>	541.28
4.2	<del>279.61</del>	279.03	<del>279.61</del>	279.03	<del>323.12</del>	323.09	<del>323.12</del>	323.09	<del>441.18</del>	440.58	<del>602.70</del>	602.13
4.5	<del>292.04</del>	291.62	<del>292.04</del>	291.62	<del>332.42</del>	331.48	<del>332.42</del>	331.48	<del>441.18</del>	440.58	<del>602.70</del>	602.13
4.8	<del>292.04</del>	291.62	<del>292.04</del>	291.62	<del>332.42</del>	331.48	<del>332.42</del>	331.48	<del>470.60</del>	469.95	<del>680.30</del>	679.75
5.0	<del>292.04</del>	291.62	<del>292.04</del>	291.62	<del>332.42</del>	331.48	<del>332.42</del>	331.48	<del>470.60</del>	469.95	<del>680.30</del>	679.75
5.5	<del>343.80</del>	313.65	<del>343.80</del>	313.65	<del>347.06</del>	347.22	<del>347.06</del>	347.22	<del>506.42</del>	505.62	<del>765.83</del>	765.77
5.8	<del>343.80</del>	313.65	<del>343.80</del>	313.65	<del>347.06</del>	347.22	<del>347.06</del>	347.22	<del>506.42</del>	505.62	<del>776.71</del>	776.26
6.0	<del>343.80</del>	313.65	<del>343.80</del>	313.65	<del>347.06</del>	347.22	<del>347.06</del>	347.22	<del>506.42</del>	505.62	<del>776.71</del>	776.26
6.5	<del>349.54</del>	349.32	<del>349.54</del>	349.32	<del>392.13</del>	381.84	<del>392.13</del>	381.84	<del>545.25</del>	544.43	<del>863.70</del>	863.33
6.8	<del>349.54</del>	349.32	<del>349.54</del>	349.32	<del>399.21</del>	398.62	<del>399.21</del>	398.62	<del>545.25</del>	544.43	<del>896.72</del>	935.71
7.0	<del>349.54</del>	349.32	<del>349.54</del>	349.32	<del>399.21</del>	398.62	<del>399.21</del>	398.62	<del>545.25</del>	544.43		
7.5	<del>388.36</del>	388.13	<del>388.36</del>	388.13	<del>399.21</del>	398.62	<del>399.21</del>	398.62	<del>605.80</del>	605.27		
7.8	<del>388.36</del>	388.13	<del>388.36</del>	388.13	<del>444.27</del>	443.73	<del>444.27</del>	443.73	<del>605.80</del>	605.27		
8.0	<del>388.36</del>	388.13	<del>388.36</del>	388.13	<del>444.27</del>	443.73	<del>444.27</del>	443.73	<del>605.80</del>	605.27		
8.5	<del>438.03</del>	437.43	<del>438.03</del>	437.43	<del>512.64</del>	511.91	<del>512.64</del>	511.91	<del>667.06</del>	667.16		
8.8	<del>475.33</del>	475.20	<del>475.33</del>	475.20	<del>539.02</del>	538.14	<del>539.02</del>	538.14	<del>667.06</del>	667.16		
9.0	<del>475.33</del>	475.20	<del>475.33</del>	475.20	<del>539.02</del>	538.14	<del>539.02</del>	538.14	<del>667.06</del>	667.16		
9.8	<del>475.33</del>	475.20	<del>475.33</del>	475.20	<del>539.02</del>	538.14	<del>539.02</del>	538.14				
10.0	<del>475.33</del>	475.20	<del>475.33</del>	475.20	<del>539.02</del>	538.14	<del>539.02</del>	538.14				
10.2	<del>571.66</del>	570.66	<del>571.66</del>	570.66	<del>688.16</del>	688.14	<del>688.16</del>	688.14				
10.8	<del>571.66</del>	570.66	<del>571.66</del>	570.66	<del>688.16</del>	688.14	<del>688.16</del>	688.14				
11.8	<del>571.66</del>	570.66	<del>571.66</del>	570.66	<del>688.16</del>	688.14	<del>688.16</del>	688.14				
12.0	<del>571.66</del>	570.66	<del>571.66</del>	570.66	<del>688.16</del>	688.14	<del>688.16</del>	688.14				

P	●											
M	●											
K	●											
N		●										
S	○											
H												
O												



Technical support: 0800 073 2 075  
 3 time served engineers,  
 available from 8:00 am to 6:00 pm, Monday to Friday  
 Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
 guaranteed free express delivery



When you see this logo it's  
 in stock in Sheffield












# INDEXABLE INSERT DRILLS



MaxiDrill 900 – the first choice for the vast majority of indexable insert drilling applications in all materials.

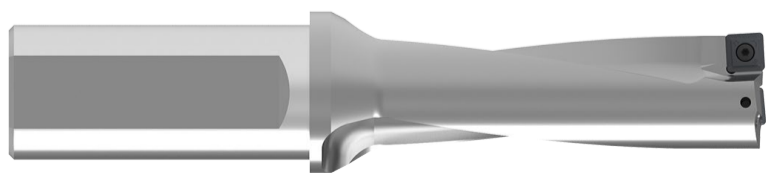

KUB Pentron – high performance problem solver with large selection of diameters and grades.












**-01** Allrounder chip breaker for normal materials.



**-03** Best swarf control for tough to machine materials including super alloys.




**-13** Good swarf control and low power/cutting forces.



**-21** Lowest power/cutting forces. For larger diameters on low power machines.

SOGX

Designation	L mm	IC mm	D1 mm	S mm
SOGX 0402..	4.8	4.8	2.05	2.20
SOGX 0502..	5.5	5.5	2.30	2.40
SOGX 0602..	6.2	6.2	2.60	2.75
SOGX 07T2..	7.1	7.1	2.60	2.97
SOGX 0803..	8.0	8.0	2.85	3.40
SOGX 09T3..	8.9	8.9	3.40	3.90
SOGX 1004..	9.8	9.8	4.10	4.20
SOGX 1104..	10.9	10.9	4.10	4.50
SOGX 1204..	12.0	12.0	5.20	4.80
SOGX 1305..	13.2	13.2	5.20	5.20




SOGX

KOMET \ Performance


**-21**  
BK8430



**-13**  
BK8425



**-03**  
BK8430



**-01**  
BK8425



**-01**  
BK7935



ISO	RE mm	10 820 ... PG 1A/3#		10 820 ... PG 1A/3#		10 820 ... PG 1A/3#		10 820 ... PG 1A/3#		10 820 ... PG 1A/3#		
		£	£	£	£	£	£	£	£	£	£	
040204	0.4	<del>19.84</del>	14.87	30413	<del>18.66</del>	13.99	00403	<del>18.66</del>	13.99	30401	<del>18.66</del>	7.34
050204	0.4	<del>19.95</del>	14.97	30513	<del>18.79</del>	14.09	00503	<del>18.79</del>	14.09	30501	<del>18.79</del>	7.34
060206	0.6	<del>20.10</del>	15.07	30613	<del>18.91</del>	14.18	00603	<del>18.91</del>	14.18	30601	<del>18.91</del>	7.34
07T208	0.8	<del>20.21</del>	15.16	30713	<del>19.03</del>	14.28	00703	<del>19.03</del>	14.28	30701	<del>19.03</del>	7.34
080308	0.8	<del>20.35</del>	15.26	30813	<del>19.15</del>	14.37	00803	<del>19.15</del>	14.37	30801	<del>19.15</del>	7.34
09T308	0.8			30913	<del>19.27</del>	14.91	00903	<del>19.27</del>	14.91	30901	<del>19.27</del>	8.39
100408	0.8	<del>21.76</del>	16.32	31013	<del>20.47</del>	15.35	01003	<del>20.47</del>	15.35	31001	<del>20.47</del>	8.39
110408	0.8	<del>22.10</del>	16.79	31113	<del>21.08</del>	15.82	01103	<del>21.08</del>	15.82	31101	<del>21.08</del>	8.39
120408	0.8	<del>23.55</del>	17.67	31213	<del>22.17</del>	16.63	01203	<del>22.17</del>	16.63	31201	<del>22.17</del>	8.39
130508	0.8	<del>27.40</del>	20.55	31313	<del>25.77</del>	19.33	01303	<del>25.77</del>	19.33	31301	<del>25.77</del>	10.49
P		●		●		●		●		●		●
M		●		●		●		●		●		●
K		●		●		●		●		●		●
N		○		○		○		○		○		○
S		●		●		●		●		●		●
H		○		○		○		○		○		○
O												○



**UK LOGISTICS**  
WHEN YOU SEE THIS LOGO  
IT'S IN STOCK IN SHEFFIELD



**Customer Service Centre**  
Freephone: 0800 073 2 073  
Email: info.uk@ceratizit.com



**Ordering via the Online Shop**  
<http://cuttingtools.ceratizit.com>





# REAMING



Fullmax – high performance solid carbide machine reamer for through and blind hole reaming in all materials.




Type N – for all standard low volume applications.

## Fullmax – High-performance machine reamers, short

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometry and coating for universal use




KOMET \ Performance

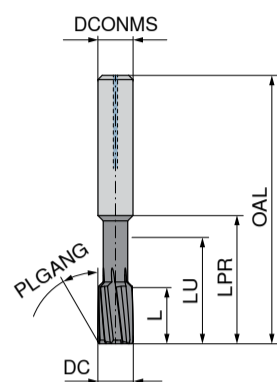

51P.57  
Left Hand Helix  
PLGANG 30°  
ASG2210  
Solid carbide  
Through hole



KOMET \ Performance

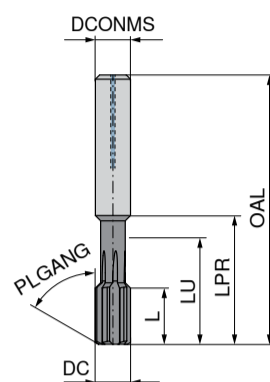

51M.57  
straight flute  
PLGANG 60°  
ASG2110  
Solid carbide  
Blind hole

DC <sub>H7</sub> mm	L mm	LU mm	LPR mm	OAL mm	DCONMS <sub>H6</sub> mm	ZEPF	40 483 ...	PG U4/4R
4	12	17	22	50	4	4	04000	<del>128.86</del> 70.87
5	12	23	28	64	6	4	05000	<del>130.78</del> 71.93
6	12	23	28	64	6	4	06000	<del>133.68</del> 73.52
7	16	29	39	75	8	6	07000	<del>139.52</del> 76.74
8	16	29	39	75	8	6	08000	<del>139.52</del> 76.74
9	16	35	40	80	10	6	09000	<del>147.15</del> 108.43
10	16	35	40	80	10	6	10000	<del>147.15</del> 108.43
11	20	40	45	90	12	6	11000	<del>261.58</del> 143.87
12	20	40	45	90	12	6	12000	<del>261.58</del> 143.87
16	20	40	45	93	16	8	16000	<del>387.88</del> 213.33

P	●
M	●
K	●
N	○
S	○
H	○
O	○

DC <sub>H7</sub> mm	L mm	LU mm	LPR mm	OAL mm	DCONMS <sub>H6</sub> mm	ZEPF	40 481 ...	PG U4/4R
4	12	17	22	50	4	4	04000	<del>107.34</del> 59.04
5	12	23	28	64	6	4	05000	<del>109.33</del> 60.13
6	12	23	28	64	6	4	06000	<del>114.23</del> 62.83
7	16	29	39	75	8	6	07000	<del>120.04</del> 66.02
8	16	29	39	75	8	6	08000	<del>120.04</del> 66.02
9	16	35	40	80	10	6	09000	<del>171.72</del> 94.45
10	16	35	40	80	10	6	10000	<del>171.72</del> 94.45
11	20	40	45	90	12	6	11000	<del>228.38</del> 125.61
12	20	40	45	90	12	6	12000	<del>228.38</del> 125.61
16	20	40	45	93	16	8	16000	<del>347.19</del> 190.95


P	●
M	●
K	●
N	○
S	○
H	○
O	○

## Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings



KOMET \ Performance

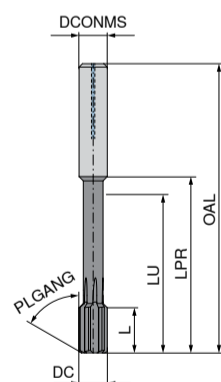

52P.57  
Left Hand Helix  
PLGANG 30°  
ASG2210  
Solid carbide  
Through hole



52S.44  
Left Hand Helix  
PLGANG 30°  
ASG2231  
Solid carbide  
Through hole



52N.17  
straight flute  
PLGANG 30°  
ASG2270  
Solid carbide  
Through hole

DC <sub>H7</sub> mm	L mm	LU mm	LPR mm	OAL mm	DCONMS <sub>H6</sub> mm	ZEPF
4	12	28	32	60	4	4
5	12	35	40	76	6	4
6	12	35	40	76	6	4
7	16	60	65	101	8	6
8	16	60	65	101	8	6
9	16	63	68	108	10	6
10	16	63	68	108	10	6
11	20	80	85	130	12	6
12	20	80	85	130	12	6
16	20	97	102	150	16	6

P	●
M	●
K	●
N	○
S	○
H	○
O	○

40 484 ...	PG U4/4R	40 401 ...	PG U4/4R	40 471 ...	PG U4/4R
04000	<del>172.52</del> 94.89	04000	<del>109.50</del> 104.23	04000 <sup>1)</sup>	<del>109.50</del> 66.00
05000	<del>175.12</del> 96.32	05000	<del>102.11</del> 105.66	05000 <sup>1)</sup>	<del>102.11</del> 105.66
06000	<del>179.06</del> 98.48	06000	<del>106.05</del> 107.83	06000 <sup>1)</sup>	<del>106.05</del> 107.83
07000	<del>186.00</del> 102.80	07000	<del>205.10</del> 112.85	07000 <sup>1)</sup>	<del>205.10</del> 112.85
08000	<del>186.00</del> 102.80	08000	<del>205.10</del> 112.85	08000 <sup>1)</sup>	<del>205.10</del> 112.85
09000	<del>264.04</del> 145.21	09000	<del>204.45</del> 160.30	09000 <sup>1)</sup>	<del>204.45</del> 160.30
10000	<del>264.04</del> 145.21	10000	<del>204.45</del> 160.30	10000 <sup>1)</sup>	<del>204.45</del> 160.30
11000	<del>350.25</del> 192.64	11000	<del>384.23</del> 211.33	11000 <sup>1)</sup>	<del>384.23</del> 211.33
12000	<del>350.25</del> 192.64	12000	<del>384.23</del> 211.33	12000 <sup>1)</sup>	<del>384.23</del> 211.33
16000	<del>460.04</del> 253.02	16000	<del>505.76</del> 278.17	16000 <sup>1)</sup>	<del>505.76</del> 278.17

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces







## Fullmax – High-performance machine reamers, long

- ▲ extremely irregular pitch
- ▲ designed for high-speed machining
- ▲ specialised geometries and coatings



KOMET \ Performance

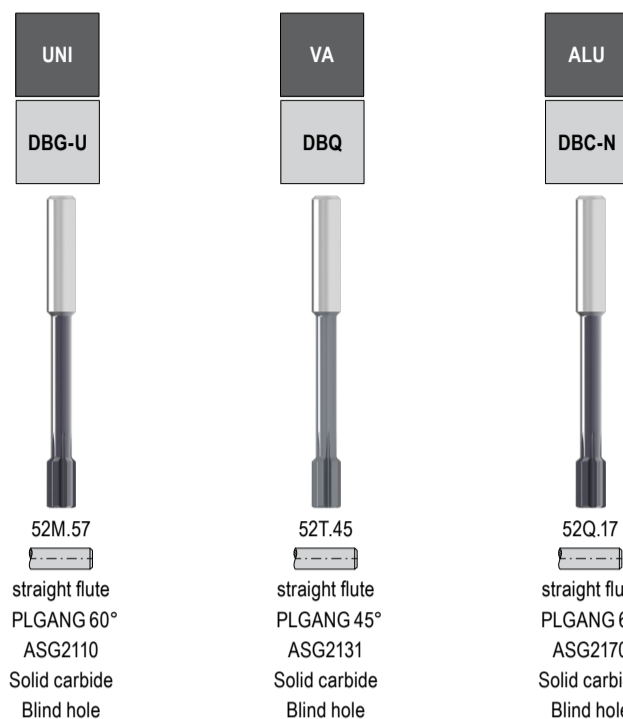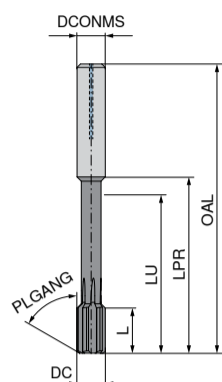

40 485 ... PG U4/4R		40 402 ... PG U4/4R		40 472 ... PG U4/4R	
£	£	£	£	£	£
04000	<del>143.77</del> 79.07	04000	<del>159.13</del> 86.97	04000 <sup>1)</sup>	<del>159.13</del> 86.97
05000	<del>146.07</del> 80.50	05000	<del>162.06</del> 89.13	05000 <sup>1)</sup>	<del>162.06</del> 89.13
06000	<del>152.02</del> 84.11	06000	<del>168.58</del> 92.72	06000 <sup>1)</sup>	<del>168.58</del> 92.72
07000	<del>160.75</del> 88.41	07000	<del>176.42</del> 97.03	07000 <sup>1)</sup>	<del>176.42</del> 97.03
08000	<del>160.75</del> 88.41	08000	<del>176.42</del> 97.03	08000 <sup>1)</sup>	<del>176.42</del> 97.03
09000	<del>230.02</del> 126.51	09000	<del>253.54</del> 139.45	09000 <sup>1)</sup>	<del>253.54</del> 139.45
10000	<del>230.02</del> 126.51	10000	<del>253.54</del> 139.45	10000 <sup>1)</sup>	<del>253.54</del> 139.45
11000	<del>305.84</del> 168.20	11000	<del>335.80</del> 184.74	11000 <sup>1)</sup>	<del>335.80</del> 184.74
12000	<del>305.84</del> 168.20	12000	<del>335.80</del> 184.74	12000 <sup>1)</sup>	<del>335.80</del> 184.74
16000	<del>411.69</del> 226.43	16000	<del>453.50</del> 249.43	16000 <sup>1)</sup>	<del>453.50</del> 249.43

DC <sub>H7</sub> mm	L mm	LU mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	ZEPF
4	12	28	32	60	4	4
5	12	35	40	76	6	4
6	12	35	40	76	6	4
7	16	60	65	101	8	6
8	16	60	65	101	8	6
9	16	63	68	108	10	6
10	16	63	68	108	10	6
11	20	80	85	130	12	6
12	20	80	85	130	12	6
16	20	97	102	150	16	6

P	•	•	•
M	•	•	•
K	•	•	•
N	•	•	•
S	•	•	•
H	•	•	•
O	•	•	•

1) Not available ex stock, articles are non-returnable and cannot be exchanged / Delivery time on request / Minimum order 2 pieces

## Everything for Machining – our Product range

Browse through our complete product range, printed or in digital format.



[cutting.tools/gb/en/e-shelf](https://cutting.tools/gb/en/e-shelf)



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: [techsupport.uk@ceratizit.com](mailto:techsupport.uk@ceratizit.com)



Order by 6:00 pm and get your guaranteed free express delivery




When you see this logo it's in stock in Sheffield

# Machine reamers, similar to DIN 8093-A / -B

▲ extremely irregular pitch

N



NEW



straight flute  
Solid carbide

NEW



Left Hand Helix  
Solid carbide

DC <sub>HT</sub>	OAL	L	LU	DCONMS <sub>HT</sub>	ZEFP	40 405 ... PG U4/R		40 415 ... PG U4/R	
						£	£	£	£
2.0	49	11	31	2.0	4	02000	<del>59.89</del> 20.26	02000	<del>59.89</del> 20.26
2.1	49	11	31	2.0	4	02100	<del>70.59</del> 24.33	02100	<del>70.59</del> 24.33
2.2	53	12	35	2.2	4	02200	<del>70.59</del> 24.33	02200	<del>70.59</del> 24.33
2.3	53	12	35	2.2	4	02300	<del>70.59</del> 24.33	02300	<del>70.59</del> 24.33
2.4	57	14	34	2.5	4	02400	<del>70.59</del> 24.33	02400	<del>70.59</del> 24.33
2.5	57	14	34	2.5	4	02500	<del>63.40</del> 21.72	02500	<del>63.40</del> 21.72
2.6	57	14	34	2.5	4	02600	<del>75.83</del> 26.07	02600	<del>75.83</del> 26.07
2.7	61	15	36	3.0	4	02700	<del>75.83</del> 26.07	02700	<del>75.83</del> 26.07
2.8	61	15	36	3.0	4	02800	<del>75.83</del> 26.07	02800	<del>75.83</del> 26.07
2.9	61	15	36	3.0	4	02900	<del>75.83</del> 26.07	02900	<del>75.83</del> 26.07
3.0	61	15	36	3.0	4	03000	<del>68.31</del> 23.33	03000	<del>68.31</del> 23.33
3.1	61	15	36	3.0	4	03100	<del>81.92</del> 28.05	03100	<del>81.92</del> 28.05
3.2	70	18	40	3.5	4	03200	<del>81.92</del> 28.05	03200	<del>81.92</del> 28.05
3.3	70	18	40	3.5	4	03300	<del>81.92</del> 28.05	03300	<del>81.92</del> 28.05
3.4	70	18	40	3.5	4	03400	<del>81.92</del> 28.05	03400	<del>81.92</del> 28.05
3.5	70	18	40	3.5	4	03500	<del>77.86</del> 26.70	03500	<del>77.86</del> 26.70
3.6	70	18	40	3.5	4	03600	<del>93.49</del> 32.02	03600	<del>93.49</del> 32.02
3.7	70	18	40	3.5	4	03700	<del>93.49</del> 32.02	03700	<del>93.49</del> 32.02
3.8	75	19	43	4.0	4	03800	<del>93.49</del> 32.02	03800	<del>93.49</del> 32.02
3.9	75	19	43	4.0	4	03900	<del>93.49</del> 32.02	03900	<del>93.49</del> 32.02
4.0	75	19	43	4.0	4	04000	<del>89.66</del> 28.72	04000	<del>89.66</del> 28.72
4.1	75	19	43	4.0	4	04100	<del>100.75</del> 34.45	04100	<del>100.75</del> 34.45
4.2	75	19	43	4.0	4	04200	<del>100.75</del> 34.45	04200	<del>100.75</del> 34.45
4.3	75	21	42	4.5	4	04300	<del>100.75</del> 34.45	04300	<del>100.75</del> 34.45
4.4	75	21	42	4.5	4	04400	<del>100.75</del> 34.45	04400	<del>100.75</del> 34.45
4.5	75	21	42	4.5	4	04500	<del>91.28</del> 31.23	04500	<del>91.28</del> 31.23
4.6	75	21	42	4.5	4	04600	<del>109.40</del> 37.48	04600	<del>109.40</del> 37.48
4.7	75	21	42	4.5	4	04700	<del>109.40</del> 37.48	04700	<del>109.40</del> 37.48
4.8	86	23	52	5.0	6	04800	<del>109.40</del> 37.48	04800	<del>109.40</del> 37.48
4.9	86	23	52	5.0	6	04900	<del>109.40</del> 37.48	04900	<del>109.40</del> 37.48
5.0	86	23	52	5.0	6	05000	<del>102.75</del> 35.28	05000	<del>102.75</del> 35.28
5.1	86	23	52	5.0	6	05100	<del>118.38</del> 40.60	05100	<del>118.38</del> 40.60
5.2	86	23	52	5.0	6	05200	<del>118.38</del> 40.60	05200	<del>118.38</del> 40.60
5.3	86	23	52	5.0	6	05300	<del>118.38</del> 40.60	05300	<del>118.38</del> 40.60
5.4	93	26	57	5.6	6	05400	<del>118.38</del> 40.60	05400	<del>118.38</del> 40.60
5.5	93	26	57	5.6	6	05500	<del>109.79</del> 37.34	05500	<del>109.79</del> 37.34
5.6	93	26	57	5.6	6	05600	<del>125.31</del> 42.90	05600	<del>125.31</del> 42.90
5.7	93	26	57	5.6	6	05700	<del>125.31</del> 42.90	05700	<del>125.31</del> 42.90
5.8	93	26	57	5.6	6	05800	<del>125.31</del> 42.90	05800	<del>125.31</del> 42.90
5.9	93	26	57	5.6	6	05900	<del>125.31</del> 42.90	05900	<del>125.31</del> 42.90
6.0	93	26	57	5.6	6	06000	<del>138.24</del> 44.67	06000	<del>138.24</del> 44.67
6.1	93	26	57	5.6	6	06100	<del>149.92</del> 51.34	06100	<del>149.92</del> 51.34
6.2	93	26	57	5.6	6	06200	<del>149.92</del> 51.34	06200	<del>149.92</del> 51.34
6.3	101	28	63	6.3	6	06300	<del>149.92</del> 51.34	06300	<del>149.92</del> 51.34
6.4	101	28	63	6.3	6	06400	<del>149.92</del> 51.34	06400	<del>149.92</del> 51.34

DC <sub>HT</sub>	OAL	L	LU	DCONMS <sub>HT</sub>	ZEFP	40 405 ... PG U4/R		40 415 ... PG U4/R	
						£	£	£	£
6.5	101	28	63	6.3	6	06500	<del>145.88</del> 50.14	06500	<del>145.88</del> 50.14
6.6	101	28	63	6.3	6	06600	<del>168.14</del> 57.65	06600	<del>168.14</del> 57.65
6.7	101	28	63	6.3	6	06700	<del>168.14</del> 57.65	06700	<del>168.14</del> 57.65
6.8	109	31	69	7.1	6	06800	<del>168.14</del> 57.65	06800	<del>168.14</del> 57.65
6.9	109	31	69	7.1	6	06900	<del>168.14</del> 57.65	06900	<del>168.14</del> 57.65
7.0	109	31	69	7.1	6	07000	<del>163.23</del> 55.97	07000	<del>163.23</del> 55.97
7.1	109	31	69	7.1	6	07100	<del>187.55</del> 64.38	07100	<del>187.55</del> 64.38
7.2	109	31	69	7.1	6	07200	<del>187.55</del> 64.38	07200	<del>187.55</del> 64.38
7.3	109	31	69	7.1	6	07300	<del>187.55</del> 64.38	07300	<del>187.55</del> 64.38
7.4	109	31	69	7.1	6	07400	<del>187.55</del> 64.38	07400	<del>187.55</del> 64.38
7.5	109	31	69	7.1	6	07500	<del>176.57</del> 60.51	07500	<del>176.57</del> 60.51
7.6	117	33	75	8.0	6	07600	<del>203.48</del> 69.57	07600	<del>203.48</del> 69.57
7.7	117	33	75	8.0	6	07700	<del>203.48</del> 69.57	07700	<del>203.48</del> 69.57
7.8	117	33	75	8.0	6	07800	<del>203.48</del> 69.57	07800	<del>203.48</del> 69.57
7.9	117	33	75	8.0	6	07900	<del>203.48</del> 69.57	07900	<del>203.48</del> 69.57
8.0	117	33	75	8.0	6	08000	<del>187.55</del> 64.42	08000	<del>187.55</del> 64.42
8.1	117	33	75	8.0	6	08100	<del>206.68</del> 70.87	08100	<del>206.68</del> 70.87
8.2	117	33	75	8.0	6	08200	<del>206.68</del> 70.87	08200	<del>206.68</del> 70.87
8.3	117	33	75	8.0	6	08300	<del>206.68</del> 70.87	08300	<del>206.68</del> 70.87
8.4	117	33	75	8.0	6	08400	<del>206.68</del> 70.87	08400	<del>206.68</del> 70.87
8.5	117	33	75	8.0	6	08500	<del>203.76</del> 69.85	08500	<del>203.76</del> 69.85
8.6	125	36	81	9.0	6	08600	<del>223.74</del> 76.81	08600	<del>223.74</del> 76.81
8.7	125	36	81	9.0	6	08700	<del>223.74</del> 76.81	08700	<del>223.74</del> 76.81
8.8	125	36	81	9.0	6	08800	<del>223.74</del> 76.81	08800	<del>223.74</del> 76.81
8.9	125	36	81	9.0	6	08900	<del>223.74</del> 76.81	08900	<del>223.74</del> 76.81
9.0	125	36	81	9.0	6	09000	<del>218.23</del> 74.90	09000	<del>218.23</del> 74.90
9.1	125	36	81	9.0	6	09100	<del>239.96</del> 82.36	09100	<del>239.96</del> 82.36
9.2	125	36	81	9.0	6	09200	<del>239.96</del> 82.36	09200	<del>239.96</del> 82.36
9.3	125	36	81	9.0	6	09300	<del>239.96</del> 82.36	09300	<del>239.96</del> 82.36
9.4	125	36	81	9.0	6	09400	<del>239.96</del> 82.36	09400	<del>239.96</del> 82.36
9.5	125	36	81	9.0	6	09500	<del>233.86</del> 80.31	09500	<del>233.86</del> 80.31
9.6	133	38	87	10.0	6	09600	<del>257.36</del> 88.34	09600	<del>257.36</del> 88.34
9.7	133	38	87	10.0	6	09700	<del>257.36</del> 88.34	09700	<del>257.36</del> 88.34
9.8	133	38	87	10.0	6	09800	<del>257.36</del> 88.34	09800	<del>257.36</del> 88.34
9.9	133	38	87	10.0	6	09900	<del>257.36</del> 88.34	09900	<del>257.36</del> 88.34
10.0	133	38	87	10.0	6	10000	<del>251.84</del> 86.42	10000	<del>251.84</del> 86.42
10.1	133	38	87	10.0	6	10100	<del>277.37</del> 95.07	10100	<del>277.37</del> 95.07
10.2	133	38	87	10.0	6	10200	<del>277.37</del> 95.07	10200	<del>277.37</del> 95.07
10.3	133	38	87	10.0	6	10300	<del>277.37</del> 95.07	10300	<del>277.37</del> 95.07
10.4	133	38	87	10.0	6	10400	<del>277.37</del> 95.07	10400	<del>277.37</del> 95.07
10.5	133	38	87	10.0	6	10500	<del>263.61</del> 90.32	10500	<del>263.61</del> 90.32
10.6	133	38	87	10.0	6	10600	<del>289.38</del> 99.37	10600	<del>289.38</del> 99.37
10.7	142	41	96	10.0	6	10700	<del>289.38</del> 99.37	10700	<del>289.38</del> 99.37
10.8	142	41	96	10.0	6	10800	<del>289.38</del> 99.37	10800	<del>289.38</del> 99.37
10.9	142	41	96	10.0	6	10900	<del>289.38</del> 99.37	10900	<del>289.38</del> 99.37
11.0	142	41	96	10.0	6	11000	<del>285.12</del> 97.89	11000	<del>285.12</del> 97.89
11.1	142	41	96	10.0	6	11100	<del>345.37</del> 107.68	11100	<del>345.37</del> 107.68
11.2	142	41	96	10.0	6	11200	<del>345.37</del> 107.68	11200	<del>345.37</del> 107.68
11.3	142	41	96	10.0	6	11300	<del>345.37</del> 107.68	11300	<del>345.37</del> 107.68
11.4	142	41	96	10.0	6	11400	<del>345.37</del> 107.68	11400	<del>345.37</del> 107.68
11.5	142	41	96	10.0	6	11500	<del>384.14</del> 103.85	11500	<del>384.14</del> 103.85
11.6	142	41	96	10.0	6	11600	<del>332.89</del> 114.29	11600	<del>332.89</del> 114.29
11.7	142	41	96	10.0	6	11700	<del>332.89</del> 114.29	11700	<del>332.89</del> 114.29
11.8	142	41	96	10.0	6	11800	<del>332.89</del> 114.29	11800	<del>332.89</del> 114.29
11.9	151	44	100	10.0	6	11900	<del>332.89</del> 114.29	11900	<del>332.89</del> 114.29
12.0	151	44	100	10.0	6	12000	<del>327.14</del> 112.57	12000	<del>327.14</del> 112.57

P	●	●
M	●	●
K		



# HSS TAPS



UNI – universal taps for all standard materials.



VA – problem solver for stainless and difficult to machine materials.



Roll tapping – 23-810 range. For all suitable applications and materials.

Through hole – Machine taps, right hand

UNI ISO 2 6H  
TiN

VA ISO 2 6H  
nitr.

POWDERSTEEL HSS-PM  
FHA 0°  
≤ 1000 N/mm²  
≤ 3xD

		23 010 ... PG T9					23 450 ... PG T9						
TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	£	£	£	£	
M2	0.40	45	2.8	2.1	1.6	4	13.5	2	020	12.23	10.40		
M3	0.50	56	3.5	2.7	2.5	11	18.0	3	030	15.37	13.06	030	14.92 12.17
M4	0.70	63	4.5	3.4	3.3	13	21.0	3	040	14.94	11.92	040	14.46 12.28
M5	0.80	70	6.0	4.9	4.2	15	25.0	3	050	15.67	13.32	050	15.67 13.32
M6	1.00	80	6.0	4.9	5.0	17	30.0	3	060	18.79	15.97	060	15.79 13.42
M8	1.25	90	8.0	6.2	6.8	20	35.0	3	080	28.95	17.73	080	17.75 15.08
M10	1.50	100	10.0	8.0	8.5	22	39.0	3	100	27.59	23.46	100	28.13 17.11

Through hole – Machine taps, right hand

UNI ISO 2 6H  
TiN

VA ISO 2 6H  
nitr.

POWDERSTEEL HSS-PM  
FHA 0°  
≤ 1000 N/mm²  
≤ 3xD

		23 021 ... PG T9					23 451 ... PG T9					
TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	£	£	£	£	
M12	1.75	110	9	7	10.2	24	3	120	32.95	28.01	120	25.94 30.55
M14	2.00	110	11	9	12.0	26	3	140	49.94	42.45	140	47.56 40.43
M16	2.00	110	12	9	14.0	27	3	160	46.38	39.42	160	58.26 42.72
M18	2.50	125	14	11	15.5	25	4	180	84.23	69.05		
M20	2.50	140	16	12	17.5	32	3	200	88.93	71.34	200	75.13 63.86

Blind hole – Machine taps, right hand

UNI ISO 2 6H  
TiN

VA ISO 2 6H  
TiN

HSS-PM  
FHA 50°  
≤ 1000 N/mm²  
≤ 2.5xD

		23 026 ... PG T9					23 456 ... PG T9						
TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	Flutes	£	£	£	£	
M3	0.50	56	3.5	2.7	2.5	6	18	3	030	17.43	14.82	030	17.43 14.82
M4	0.70	63	4.5	3.4	3.3	7	21	3	040	17.43	14.82	040	19.88 16.22
M5	0.80	70	6.0	4.9	4.2	8	25	3	050	19.79	15.97	050	19.39 16.48
M6	1.00	80	6.0	4.9	5.0	10	30	3	060	24.76	18.49	060	24.83 21.16
M8	1.25	90	8.0	6.2	6.8	14	35	3	080	25.92	21.95	080	26.69 22.68
M10	1.50	100	10.0	8.0	8.5	16	39	3	100	32.54	27.63	100	36.84 31.29

Blind hole – Machine taps, right hand

UNI ISO 2 6H  
TiN

VA ISO 2 6H  
TiN

HSS-PM  
FHA 50°  
≤ 1000 N/mm²  
≤ 2.5xD

HSS-PM  
FHA 40°  
≤ 1200 N/mm²  
≤ 2.5xD

		23 027 ... PG T9					23 457 ... PG T9					
TD	TP	OAL	DCONMS	DRVS	PHD	THL	Flutes	£	£	£	£	
M12	1.75	110	9	7	10.2	18	4	120	38.46	32.69		
M12	1.75	110	9	7	10.2	18	3				120	52.78 44.86
M14	2.00	110	11	9	12.0	20	4	140	55.31	47.02		
M16	2.00	110	12	9	14.0	22	4	160	55.31	47.02		
M16	2.00	110	12	9	14.0	22	3				160	66.33 56.38
M20	2.50	140	16	12	17.5	25	3	200	63.37	53.87	200	131.76 112.00

Through hole / Blind hole – Machine thread formers, right hand

UNI ISO 2X 6HX  
TiN

POWDERSTEEL HSS-E  
≤ 850 N/mm²  
≤ 3xD

		23 810 ... PG T9							
TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	£	£
M2	0.40	45	2.8	2.1	1.85	7	12	020	52.82 44.90
M2,5	0.45	50	2.8	2.1	2.33	9	14	025	47.05 39.99
M3	0.50	56	3.5	2.7	2.80	11	18	030	34.25 29.11
M4	0.70	63	4.5	3.4	3.70	13	21	040	34.74 29.53
M5	0.80	70	6.0	4.9	4.65	15	25	050	37.24 31.66
M6	1.00	80	6.0	4.9	5.60	17	30	060	44.79 37.99
M8	1.25	90	8.0	6.2	7.45	20	35	080	49.62 42.43
M10	1.50	100	10.0	8.0	9.35	22	39	100	66.57 56.58

Through hole / Blind hole – Machine thread formers, right hand

UNI SN ISO 2X 6HX  
TiN


POWDERSTEEL HSS-E  
≤ 850 N/mm²  
≤ 3xD

		23 814 ... PG T9							
TD	TP	OAL	DCONMS	DRVS	PHD	THL	LU	£	£
M2	0.40	45	2.8	2.1	1.85	7	12	020	60.04 45.11
M2,5	0.45	50	2.8	2.1	2.33	9	14	025	54.40 40.91
M3	0.50	56	3.5	2.7	2.80	11	18	030	36.47 27.27
M4	0.70	63	4.5	3.4	3.70	13	21	040	78.14 58.74
M5	0.80	70	6.0	4.9	4.65	15	25	050	82.40 61.89
M6	1.00	80	6.0	4.9	5.60	17	30	060	94.58 71.33
M8	1.25	90	8.0	6.2	7.45	20	35	080	98.79 74.48
M10	1.50	100	10.0	8.0	9.35	22	39	100	63.75 48.25





# THREAD MILLING CUTTERS

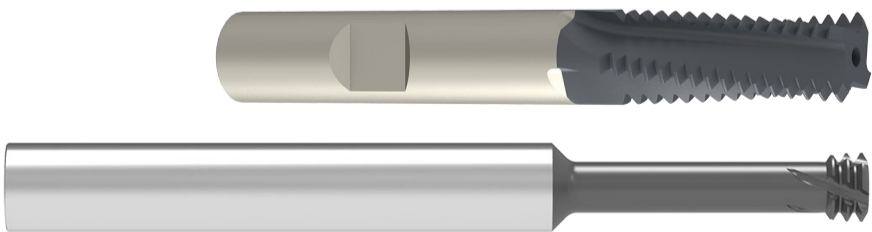


## SGF

- ▲ universal application for all materials.
- ▲ 2xD
- ▲ 3xD and 4xD
- ▲ metric fine version available in 2xD.

### MonoThread – Thread milling cutter


▲ Profile corrected  
▲ Hard machining from Ø DC = 4 mm possible



≤ 2xD



M

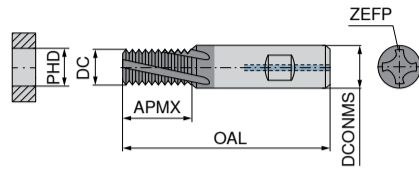

Ti500



WNT \ Standard


DC mm	Thread	TP mm	APMX mm	DCONMS <sub>h6</sub> mm	OAL mm	ZEFP	PHD mm	54 821 ...	PG W8/W9
								£	£
2.40	M3	0.50	7.0	4	42	2	2.50	03000 <sup>1)</sup>	<del>125.68</del> 115.39
3.15	M4	0.70	10.0	6	55	3	3.30	04000 <sup>2)</sup>	<del>125.68</del> 115.39
4.00	M5	0.80	12.2	6	55	3	4.20	05000 <sup>2)</sup>	<del>125.68</del> 115.39
4.80	M6	1.00	14.3	6	55	3	5.00	06000 <sup>2)</sup>	<del>125.68</del> 115.39
6.00	M8	1.25	19.0	6	60	3	6.75	08000	<del>131.04</del> 125.88
8.00	M10	1.50	23.0	8	70	3	8.50	10000	<del>150.62</del> 157.35
9.90	M12	1.75	28.6	10	75	4	10.25	12000	<del>192.87</del> 188.82
11.60	M14	2.00	32.6	12	85	4	12.00	14000	<del>223.34</del> 220.29
12.00	M16	2.00	36.6	12	85	4	14.00	16000	<del>233.45</del> 230.78
14.00	M18	2.50	43.3	14	90	4	15.50	18000	<del>276.46</del> 272.74
16.00	M20	2.50	43.3	16	90	4	17.50	20000	<del>297.49</del> 283.23

P	•
M	•
K	•
N	•
S	•
H	•
O	•

1) DIN 6535 HA Shank / Without Through Coolant  
2) Without Through Coolant

### MonoThread – Thread milling cutter


▲ Profile corrected  
▲ Hard machining from Ø DC = 4 mm possible



≤ 2xD



MF

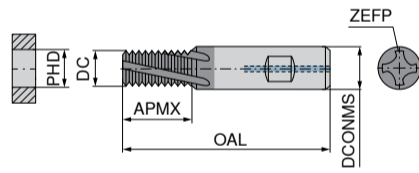

Ti500



WNT \ Standard

DC mm	Thread	TP mm	APMX mm	DCONMS <sub>h6</sub> mm	OAL mm	ZEFP	PHD mm	54 822 ...	PG W8/W9
								£	£
4.0	M 5x0,5	0.50	11.6	6	55	3	4.50	05000 <sup>1)</sup>	<del>125.68</del> 115.39
4.8	M 6x0,75	0.75	14.5	6	55	3	5.25	06000 <sup>1)</sup>	<del>125.68</del> 115.39
6.0	M 8x1	1.00	19.3	6	60	3	7.00	08000	<del>131.04</del> 125.88
8.0	M 10x1,25	1.25	21.6	8	70	3	8.75	10000	<del>150.62</del> 157.35
9.9	M 12x1	1.00	27.3	10	75	4	11.00	12000	<del>192.87</del> 188.82
9.9	M 12x1,25	1.25	27.9	10	75	4	10.75	12100	<del>192.87</del> 188.82
9.9	M 12x1,5	1.50	27.5	10	75	4	10.50	12200	<del>192.87</del> 188.82
11.6	M 14x1	1.00	31.3	12	85	4	13.00	14000	<del>223.34</del> 220.29
11.6	M 14x1,5	1.50	32.0	12	85	4	12.50	14100	<del>223.34</del> 220.29
12.0	M 16x1,5	1.50	35.0	12	85	4	14.50	16000	<del>233.45</del> 230.78
14.0	M 18x1,5	1.50	42.5	14	90	4	16.50	18000	<del>276.46</del> 272.74
16.0	M 20x1,5	1.50	42.5	16	90	4	18.50	20000	<del>297.49</del> 283.23

P	•
M	•
K	•
N	•
S	•
H	•
O	•

1) DIN 6535 HA Shank / Without Through Coolant

**Please Note:** G, UNF, UNC, NPT, BSF, BSW, Pg, Tr and UN also available in the main catalogue.

### MonoThread – Circular shank thread milling cutter


▲ Available on request from M1  
▲ Profile corrected



≤ 3xD



M

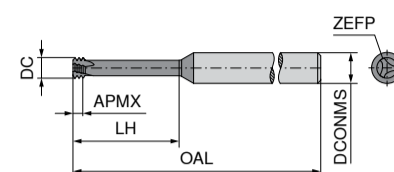


Ti600



WNT \ Performance

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS <sub>h6</sub> mm	ZEFP	50 802 ...	PG W1
								£	£
1.53	M2	0.40	39	0.80	6.0	3	3	02000	<del>96.04</del> 96.51
2.37	M3	0.50	58	1.35	9.5	6	3	03000	<del>96.04</del> 96.51
3.10	M4	0.70	58	1.95	12.5	6	3	04000	<del>96.04</del> 96.51
3.80	M5	0.80	58	2.30	16.0	6	3	05000	<del>96.04</del> 96.51
4.65	M6	1.00	58	2.70	20.0	6	3	06000	<del>96.04</del> 96.51
6.00	M8	1.25	58	3.20	24.0	6	3	08000	<del>96.04</del> 96.51
7.80	M10	1.50	64	3.80	31.5	8	3	10000	<del>120.79</del> 120.64
9.00	M12	1.75	73	4.55	37.8	10	3	12000	<del>135.78</del> 135.32




Solid carbide

DC mm	Thread	TP mm	OAL mm	APMX mm	LH mm	DCONMS <sub>h6</sub> mm	ZEFP	50 803 ...	PG W1
								£	£
1.53	M2	0.40	39	1.00	10.4	3	3	02000	<del>109.10</del> 109.10
2.40	M3	0.50	39	1.30	12.5	3	3	03000	<del>104.25</del> 103.85
3.10	M4	0.70	58	1.80	16.7	6	3	04000	<del>104.25</del> 103.85
4.00	M5	0.80	58	2.10	20.8	6	3	05000	<del>104.25</del> 103.85
4.80	M6	1.00	58	2.55	25.0	6	3	06000	<del>104.25</del> 103.85
6.40	M8	1.25	64	3.15	33.5	8	3	08000	<del>129.03</del> 129.03
8.00	M10	1.50	76	3.85	41.5	8	3	10000	<del>129.03</del> 129.03


P	•
M	•
K	•
N	•
S	•
H	•
O	•

### Our recycling service


Our joint contribution for the good of the environment: we take back your carbide and process it appropriately. You receive a credit from us that you can redeem with your next tool purchase.



# THREAD TURNING



CWN1525 – for small batch and manual machining in all materials.




HCN2525 – for high performance and volume production in all materials.

## Right hand external thread turning insert

▲ Full profile



WNT \ Performance




Designation	TP mm	INSL mm	PDX mm	PDY mm	ER		ER	
					71 220 ...	PG X3	71 220 ...	PG X3
16 ER 0,35	0.35	16	0.8	0.4			734	<del>20.06</del> 20.34
16 ER 0,4	0.40	16	0.7	0.4			736	<del>20.06</del> 20.34
16 ER 0,5	0.50	16	0.6	0.6	140	<del>19.95</del> 13.96	740	<del>22.64</del> 15.85
16 ER 0,7	0.70	16	0.6	0.6	141	<del>22.08</del> 15.46	741	<del>23.37</del> 16.36
16 ER 0,75	0.75	16	0.6	0.6	142	<del>20.79</del> 14.51	742	<del>22.64</del> 15.85
16 ER 0,8	0.80	16	0.6	0.6	143	<del>20.73</del> 14.51	743	<del>22.64</del> 15.85
16 ER 1,0	1.00	16	0.7	0.7	144	<del>19.35</del> 13.55	744	<del>22.08</del> 15.46
16 ER 1,25	1.25	16	0.8	0.9	146	<del>19.35</del> 13.55	746	<del>22.08</del> 15.46
16 ER 1,5	1.50	16	0.8	1.0	148	<del>19.35</del> 13.55	748	<del>22.08</del> 15.46
16 ER 1,75	1.75	16	0.9	1.2	150	<del>19.35</del> 13.55	750	<del>22.08</del> 15.46
16 ER 2,0	2.00	16	1.0	1.3	152	<del>19.35</del> 13.55	752	<del>22.08</del> 15.46
16 ER 2,5	2.50	16	1.1	1.5	154	<del>19.35</del> 13.55	754	<del>22.08</del> 15.46
16 ER 3,0	3.00	16	1.2	1.6	156	<del>19.35</del> 13.55	756	<del>22.08</del> 15.46
P								○
M								○
K								○
N								○
S								○
H								○
O								○

## Right hand internal thread turning insert

▲ Full profile



WNT \ Performance




Designation	TP mm	INSL mm	PDX mm	PDY mm	IR		IR	
					71 224 ...	PG X3	71 224 ...	PG X3
16 IR 0,75	0.75	16	0.6	0.6	142	<del>21.32</del> 17.03	742	<del>27.42</del> 18.99
16 IR 1,0	1.00	16	0.6	0.7	144	<del>19.35</del> 13.55	744	<del>22.08</del> 15.46
16 IR 1,25	1.25	16	0.8	0.9			746	<del>23.24</del> 16.27
16 IR 1,5	1.50	16	0.8	1.0	148	<del>19.35</del> 13.55	748	<del>22.08</del> 15.46
16 IR 1,75	1.75	16	0.9	1.2			750	<del>27.42</del> 18.99
16 IR 2,0	2.00	16	1.0	1.3	152	<del>19.35</del> 13.55	752	<del>22.08</del> 15.46
16 IR 2,5	2.50	16	1.1	1.5	154	<del>19.35</del> 13.55	754	<del>22.08</del> 15.46
16 IR 3,0	3.00	16	1.1	1.5	156	<del>19.35</del> 13.55	756	<del>22.08</del> 15.46
P								○
M								○
K								○
N								○
S								○
H								○
O								○

## Standard External Thread Turning Holder

▲ Tool Holder with Approach Angle β = 1,5°

WNT \ Performance

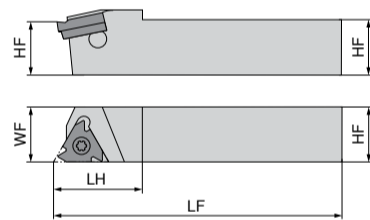

Illustrations show right-hand versions




ISO designation	HF mm	WF mm	LF mm	LH mm	H mm	Insert	torque moment Nm
SE R 12 12 F16	12	16	80	22	12	16 ..	3,5
SE R 16 16 H16	16	16	100	25	16	16 ..	3,5
SE R 20 20 K16	20	20	125	30	20	16 ..	3,5
SE R 25 25 M16	25	25	150	30	25	16 ..	3,5
SE R 32 32 P16	32	32	170	30	32	16 ..	3,5

Right-hand	
71 280 ...	PG Y2
	£
012	<del>142.49</del> 49.30
016	<del>176.03</del> 60.84
020	<del>175.03</del> 60.84
025	<del>199.75</del> 69.23
032	<del>249.52</del> 76.58

## Standard Internal Thread Turning Holder

▲ Tool Holder with Approach Angle β = 1,5°

WNT \ Performance

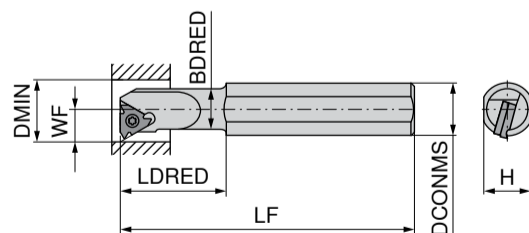

Illustrations show right-hand versions



ISO designation	H mm	LF mm	LDRED mm	DCONMS mm	BDRED mm	WF mm	DMIN mm	Insert	torque moment Nm
SI L 0013 M16	14.0	150	32	16	13.0	10.2	16	16 ..	3,5
SI L 0016 P16	18.0	170	40	20	15.0	11.7	19	16 ..	3,5
SI L 0020 P16	18.0	170	40	20	19.5	13.7	24	16 ..	3,5
SI L 0032 S16	28.8	250	50	32	31.5	19.7	36	16 ..	3,5
SI R 0013 M16	14.0	150	32	16	13.0	10.2	16	16 ..	3,5
SI R 0016 P16	18.0	170	40	20	15.0	11.7	19	16 ..	3,5
SI R 0020 P16	18.0	170	40	20	19.5	13.7	24	16 ..	3,5
SI R 0025 R16	22.6	200	40	25	24.5	16.2	29	16 ..	3,5
SI R 0032 S16	28.8	250	50	32	31.5	19.7	36	16 ..	3,5
SI R 0040 T16	36.0	300	50	40	39.5	23.7	44	16 ..	3,5

Left-hand		Right-hand	
71 283 ...	PG Y2	71 282 ...	PG Y2
	£		£
015 <sup>1)</sup>	<del>166.02</del> 57.70		
016 <sup>1)</sup>	<del>166.02</del> 57.70		
020	<del>196.78</del> 68.19		
032	<del>257.09</del> 89.17		
		015 <sup>1)</sup>	<del>166.02</del> 57.70
		016 <sup>1)</sup>	<del>166.02</del> 57.70
		020	<del>196.78</del> 68.19
		026	<del>239.25</del> 82.87
		032	<del>297.09</del> 89.17
		040	<del>384.69</del> 132.17


1) without shim









# TURNING



CTCP115 / CTCP125 / CTCP135 – P  
High performance turning of steels  
with wear detection feature.



CTCM120 / CTCM130  
High performance turning  
of stainless steels.



CTPX710 / CTPX715  
High performance universal grade  
on difficult to machine materials.



# Steel machining made easy

The new ISO-P grades with indicator layer for high-performance turning processes!

## Machining with no compromises – with the CERATIZIT ISO-P carbide grades update


Thanks to a CVD multilayer coating with the latest Dragonskin coating technology, the indexable inserts are ideally suited to versatile steel machining. In combination with a balanced carbide base substrate, the new grades in the ISO-P category boast a wide application area with improved wear resistance.

Depending on the cutting conditions, the perfect cutting material can be selected from three grades:

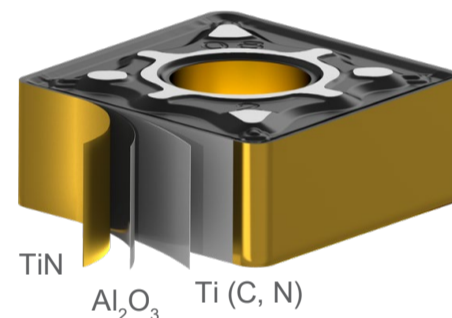

### CTCP115-P

- ▲ ISO-P15
- ▲ Wear-resistant grade with high degree of elevated-temperature resistance for steel machining with optimum tool life
- ▲ High cutting speeds
- ▲ Maximum productivity
- ▲ For a smooth cut




### CTCP135-P

- ▲ ISO-P35
- ▲ Tough carbide grade for interrupted cuts
- ▲ Guaranteed process security
- ▲ For low cutting speeds and unstable conditions

DRAGONSKIN

DRAGONSKIN




### CTCP125-P

- ▲ ISO-P25
- ▲ Universal carbide grade for steel machining
- ▲ Excellent balance between toughness and elevated-temperature resistance
- ▲ High level of reliability for machining general steel
- ▲ Excellent for fluctuating cutting conditions, from finishing to roughing

DRAGONSKIN

CNMG / DNMG / WNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
WNMG 0604..	6.5	4.76	3.81	9.52
WNMG 0804..	8.6	4.76	5.16	12.70
DNMG 1104..	11.6	4.76	3.81	9.52
CNMG 1204..	12.9	4.76	5.16	12.70
DNMG 1506..	15.5	6.35	5.16	12.70
DNMG 1504..	15.5	4.76	5.16	12.70
CNMG 1606..	16.1	6.35	6.35	15.87

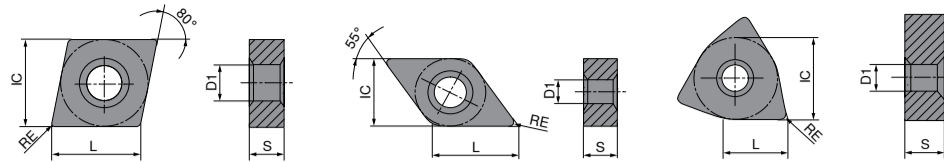

CNMG

CERATIZIT \ Performance

ISO	RE
	mm
120404EN	0.4
120408EN	0.8
120412EN	1.2
120416EN	1.6
160608EN	0.8
160612EN	1.2
160616EN	1.6

**-M50**  
CTCP115-P  
DRAGONSKIN

M  
76 135 ... PG 1A/08

	£	£
32801	<del>13.84</del>	10.37
33001	<del>13.84</del>	10.37
32001	<del>13.84</del>	10.37
33401	<del>13.84</del>	10.37
34201	<del>22.35</del>	16.76
34401	<del>22.35</del>	16.76
34601	<del>22.35</del>	16.76

**-M50**  
CTCP125-P  
DRAGONSKIN

M  
76 135 ... PG 1A/08

	£	£
52801	<del>13.84</del>	10.37
53001	<del>13.84</del>	10.37
53201	<del>13.84</del>	10.37
53401	<del>13.84</del>	10.37
54201	<del>22.35</del>	16.76
54401	<del>22.35</del>	16.76
54601	<del>22.35</del>	16.76

**-M50**  
CTCP135-P  
DRAGONSKIN

M  
76 135 ... PG 1A/08

	£	£
72801	<del>13.84</del>	10.37
73001	<del>13.84</del>	10.37
73201	<del>13.84</del>	10.37
73401	<del>13.84</del>	10.37
74201	<del>22.35</del>	16.76
74401	<del>22.35</del>	16.76
74601	<del>22.35</del>	16.76

P	●	●	●
M	○	○	○
K	○	○	○
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

DNMG

CERATIZIT \ Performance

ISO	RE
	mm
110404EN	0.4
110408EN	0.8
110412EN	1.2
150404EN	0.4
150408EN	0.8
150412EN	1.2
150416EN	1.6
150604EN	0.4
150608EN	0.8
150612EN	1.2
150616EN	1.6

**-M50**  
CTCP115-P  
DRAGONSKIN

M  
76 136 ... PG 1A/08

	£	£
30401	<del>14.76</del>	11.07
30601	<del>14.76</del>	11.07
30801	<del>14.76</del>	11.07
31601	<del>17.98</del>	13.43
31801	<del>17.98</del>	13.43
32001	<del>17.98</del>	13.43
32201	<del>17.98</del>	13.43
32801	<del>19.39</del>	14.54
33001	<del>19.39</del>	14.54
33201	<del>19.39</del>	14.54
33401	<del>19.39</del>	14.54

**-M50**  
CTCP125-P  
DRAGONSKIN

M  
76 136 ... PG 1A/08

	£	£
50401	<del>14.76</del>	11.07
50601	<del>14.76</del>	11.07
50801	<del>14.76</del>	11.07
51401	<del>17.98</del>	13.43
51801	<del>17.98</del>	13.43
51601	<del>17.98</del>	13.43
52201	<del>17.98</del>	13.43
52801	<del>19.39</del>	14.54
53001	<del>19.39</del>	14.54
53201	<del>19.39</del>	14.54
53401	<del>19.39</del>	14.54

**-M50**  
CTCP135-P  
DRAGONSKIN

M  
76 136 ... PG 1A/08

	£	£
70401	<del>14.76</del>	11.07
70601	<del>14.76</del>	11.07
70801	<del>14.76</del>	11.07
71601	<del>17.98</del>	13.43
71801	<del>17.98</del>	13.43
72001	<del>17.98</del>	13.43
72201	<del>17.98</del>	13.43
72801	<del>19.39</del>	14.54
73001	<del>19.39</del>	14.54
73201	<del>19.39</del>	14.54
73401	<del>19.39</del>	14.54

P	●	●	●
M	○	○	○
K	○	○	○
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○

WNMG

CERATIZIT \ Performance

ISO	RE
	mm
060404EN	0.4
060408EN	0.8
060412EN	1.2
080404EN	0.4
080408EN	0.8
080412EN	1.2
080416EN	1.6

**-M50**  
CTCP115-P  
DRAGONSKIN

M  
76 139 ... PG 1A/08

	£	£
30401	<del>12.06</del>	9.05
30601	<del>12.06</del>	9.05
30801	<del>12.06</del>	9.05
31601	<del>15.18</del>	11.38
31801	<del>15.18</del>	11.38
32001	<del>15.18</del>	11.38
32201	<del>15.18</del>	11.38

**-M50**  
CTCP125-P  
DRAGONSKIN

M  
76 139 ... PG 1A/08

	£	£
50401	<del>12.06</del>	9.05
50601	<del>12.06</del>	9.05
50801	<del>12.06</del>	9.05
51601	<del>15.18</del>	11.38
51801	<del>15.18</del>	11.38
52001	<del>15.18</del>	11.38
52201	<del>15.18</del>	11.38

**-M50**  
CTCP135-P  
DRAGONSKIN

M  
76 139 ... PG 1A/08

	£	£
70401	<del>12.06</del>	9.05
70601	<del>12.06</del>	9.05
70801	<del>12.06</del>	9.05
71601	<del>15.18</del>	11.38
71801	<del>15.18</del>	11.38
72001	<del>15.18</del>	11.38
72201	<del>15.18</del>	11.38

P	●	●	●
M	○	○	○
K	○	○	○
N	○	○	○
S	○	○	○
H	○	○	○
O	○	○	○



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com




Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield

CCMT / DCMT / VCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CCMT 0602..	6.40	2.38	2.8	6.35
DCMT 0702..	7.75	2.38	2.8	6.35
CCMT 09T3..	9.70	3.97	4.4	9.52
DCMT 11T3..	11.60	3.97	4.4	9.52
DCMT 0702..	11.60	3.97	4.4	9.52
CCMT 1204..	12.90	4.76	5.5	12.70
VCMT 1604..	16.60	4.76	4.4	9.52

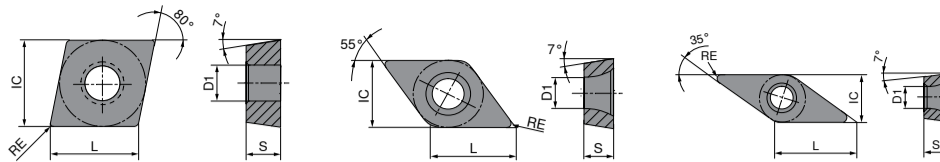

CCMT

CERATIZIT \ Performance

ISO	RE
	mm
060204EN	0.4
060208EN	0.8
09T304EN	0.4
09T308EN	0.8
120404EN	0.4
120408EN	0.8
120412EN	1.2

**-SM**  
CTCP115-P

DRAGONSKIN

**M**

76 252 ... PG 1A/08

	£	£
30401	<del>9.41</del>	7.06
30601	<del>9.41</del>	7.06
31601	<del>11.75</del>	8.81
31801	<del>11.75</del>	8.81
32801	<del>16.54</del>	12.41
33001	<del>16.54</del>	12.41

**-SM**  
CTCP125-P

DRAGONSKIN

**M**

76 252 ... PG 1A/08

	£	£
50401	<del>9.41</del>	7.06
51601	<del>11.75</del>	8.81
51801	<del>11.75</del>	8.81
52801	<del>16.54</del>	12.41
53001	<del>16.54</del>	12.41
53201	<del>16.54</del>	12.41

**-SM**  
CTCP135-P

DRAGONSKIN

**M**

76 252 ... PG 1A/08

	£	£
70401	<del>9.41</del>	7.06
70601	<del>9.41</del>	7.06
71601	<del>11.75</del>	8.81
71801	<del>11.75</del>	8.81
72801	<del>16.54</del>	12.41
73001	<del>16.54</del>	12.41

P	●	●	●
M			
K	○	○	○
N			
S			
H			
O			

DCMT

CERATIZIT \ Performance

ISO	RE
	mm
070204EN	0.4
070208EN	0.8
11T304EN	0.4
11T308EN	0.8
11T312EN	1.2

**-SM**  
CTCP115-P

DRAGONSKIN

**M**

76 258 ... PG 1A/08

	£	£
30401	<del>9.41</del>	7.06
30601	<del>9.41</del>	7.06
31601	<del>13.25</del>	9.93
31801	<del>13.25</del>	9.93

**-SM**  
CTCP125-P

DRAGONSKIN

**M**

76 258 ... PG 1A/08

	£	£
50401	<del>9.41</del>	7.06
50601	<del>9.41</del>	7.06
51601	<del>13.25</del>	9.93
51801	<del>13.25</del>	9.93
52001	<del>13.25</del>	9.93

**-SM**  
CTCP135-P

DRAGONSKIN

**M**

76 258 ... PG 1A/08

	£	£
70401	<del>9.41</del>	7.06
70601	<del>9.41</del>	7.06
71601	<del>13.25</del>	9.93
71801	<del>13.25</del>	9.93

P	●	●	●
M			
K	○	○	○
N			
S			
H			
O			

VCMT

CERATIZIT \ Performance

ISO	RE
	mm
160404EN	0.4
160406EN	0.6
160408EN	0.8
160412EN	1.2

**-SM**  
CTCP115-P

DRAGONSKIN

**M**

76 278 ... PG 1A/08

	£	£
32801	<del>19.39</del>	14.54
32901	<del>19.39</del>	14.54
33001	<del>19.39</del>	14.54
33201	<del>19.39</del>	14.54

**-SM**  
CTCP125-P

DRAGONSKIN

**M**

76 278 ... PG 1A/08

	£	£
52801	<del>19.39</del>	14.54
53001	<del>19.39</del>	14.54
53201	<del>19.39</del>	14.54

**-SM**  
CTCP135-P

DRAGONSKIN

**M**

76 278 ... PG 1A/08

	£	£
72801	<del>19.39</del>	14.54
73001	<del>19.39</del>	14.54
73201	<del>19.39</del>	14.54

P	●	●	●
M			
K	○	○	○
N			
S			
H			
O			



# STAINLESS STEEL MACHINING MADE EASY


Dragonskin – new grades with the high-performance coating technology from CERATIZIT

Always the right solution for machining austenitic, stainless steels. In addition to the established CTPM125, two new grades now round off our product range: the more wear-resistant CTCM120 and the tougher CTCM130. Thanks to the Dragonskin coating, both grades are high performers and process-secure.



### CTCM120

- ▲ Wear-resistant grade for austenitic steels
- ▲ High cutting speeds
- ▲ For a smooth cut




### CTCM130

- ▲ Tough carbide grade for interrupted cuts
- ▲ Guaranteed process security
- ▲ For lower cutting speeds and unstable conditions

## CNMG / DNMG / WNMG

Designation	L	S	D1	IC
	mm	mm	mm	mm
WNMG 0604..	6.5	4.76	3.81	9.52
WNMG 0804..	8.6	4.76	5.16	12.70
DNMG 1104..	11.6	4.76	3.81	9.52
CNMG 1204..	12.9	4.76	5.16	12.70
DNMG 1506..	15.5	6.35	5.16	12.70

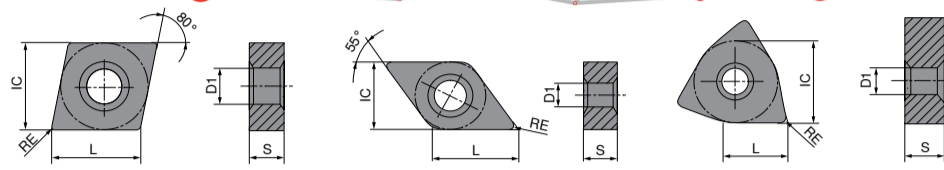

## CNMG

CERATIZIT \ Performance

ISO	RE
	mm
120408EN	0.8
120412EN	1.2
120416EN	1.6

	CTCM120	CTCM130
P	○	○
M	●	●
K	○	○
N	○	○
S	○	○
H	○	○
O	○	○

**-M30**  
CTCM120

DRAGONSKIN

M

75 011 ... PG 1A/08

£	£
13000	<del>13.84</del> 10.37
13200	<del>13.84</del> 10.37
13400	<del>13.84</del> 10.37

**-M30**  
CTCM130

DRAGONSKIN

M

75 011 ... PG 1A/08

£	£
33000	<del>13.84</del> 10.37
33200	<del>13.84</del> 10.37
33400	<del>13.84</del> 10.37

## DNMG

CERATIZIT \ Performance

ISO	RE
	mm
110408EN	0.8
110412EN	1.2
150608EN	0.8
150612EN	1.2

	CTCM120	CTCM130
P	○	○
M	●	●
K	○	○
N	○	○
S	○	○
H	○	○
O	○	○

**-M30**  
CTCM120

DRAGONSKIN

M

75 014 ... PG 1A/08

£	£
10600	<del>14.76</del> 11.07
10800	<del>14.76</del> 11.07
13000	<del>19.39</del> 14.54
13200	<del>19.39</del> 14.54

**-M30**  
CTCM130

DRAGONSKIN

M

75 014 ... PG 1A/08

£	£
30600	<del>14.76</del> 11.07
30800	<del>14.76</del> 11.07
33000	<del>19.39</del> 14.54
33200	<del>19.39</del> 14.54

## WNMG

CERATIZIT \ Performance

ISO	RE
	mm
060408EN	0.8
060412EN	1.2
080408EN	0.8
080412EN	1.2

	CTCM120	CTCM130
P	○	○
M	●	●
K	○	○
N	○	○
S	○	○
H	○	○
O	○	○

**-M30**  
CTCM120

DRAGONSKIN

M

75 025 ... PG 1A/08

£	£
10600	<del>12.06</del> 9.05
10800	<del>12.06</del> 9.05
11800	<del>15.18</del> 11.38
12000	<del>15.18</del> 11.38

**-M30**  
CTCM130

DRAGONSKIN

M

75 025 ... PG 1A/08

£	£
30600	<del>12.06</del> 9.05
30800	<del>12.06</del> 9.05
31800	<del>15.18</del> 11.38
32000	<del>15.18</del> 11.38



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com




Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield

### CCMT / DCMT / VCMT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CCMT 0602..	6.40	2.38	2.8	6.35
DCMT 0702..	7.75	2.38	2.8	6.35
CCMT 09T3..	9.70	3.97	4.4	9.52
DCMT 11T3..	11.60	3.97	4.4	9.52
VCMT 1604..	16.60	4.76	4.4	9.52

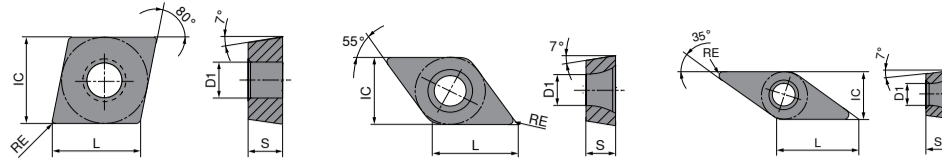

### CCMT

CERATIZIT \ Performance

ISO	RE
	mm
060204EN	0.4
09T304EN	0.4
09T308EN	0.8

	P	M	K	N	S	H	O

**-M25**  
CTCM120

DRAGONSKIN

**F**

75 210 ... PG 1A/08

£	£
10400	9.44 7.06
11600	11.75 8.81
11800	11.75 8.81

**-M25**  
CTCM130

DRAGONSKIN

**F**

75 210 ... PG 1A/08

£	£
30400	9.44 7.06
31600	11.75 8.81
31800	11.75 8.81

### DCMT

CERATIZIT \ Performance

ISO	RE
	mm
070202EN	0.2
070204EN	0.4
11T302EN	0.2
11T304EN	0.4
11T308EN	0.8

	P	M	K	N	S	H	O

**-M25**  
CTCM120

DRAGONSKIN

**F**

75 213 ... PG 1A/08

£	£
10200	9.44 7.06
10400	9.44 7.06
11400	13.25 9.93
11600	13.25 9.93
11800	13.25 9.93

**-M25**  
CTCM130

DRAGONSKIN

**F**

75 213 ... PG 1A/08

£	£
30200	9.44 7.06
30400	9.44 7.06
31400	13.25 9.93
31600	13.25 9.93
31800	13.25 9.93

### VCMT

CERATIZIT \ Performance

ISO	RE
	mm
160404EN	0.4
160408EN	0.8

	P	M	K	N	S	H	O

**-M25**  
CTCM120

DRAGONSKIN

**F**

75 219 ... PG 1A/08

£	£
12800	19.39 14.54
13000	19.39 14.54

**-M25**  
CTCM130

DRAGONSKIN

**F**

75 219 ... PG 1A/08

£	£
32800	19.39 14.54
33000	19.39 14.54



# X7-Line

HRSA and Ti machining made easy

## Grade description

# CTP X7 10/15

Degree of hardness

10 ISO 10

15 ISO 15

...

### Main application – material

- P Steel
- M Stainless steel
- K Cast iron
- N Light and non ferrous metals
- S Super alloys, titanium
- H Hard materials

**X Universal application**


### Application

- 1 Turning
- 2 Milling
- 3 Grooving
- 4 Drilling
- 5 Thread turning
- 6 Others
- 7 Multiple procedures\*

Universal application range





**P M K N S**

\*In future multiple procedures possible turning | grooving | milling

 Further information on the product can be found in our main catalogue → **Chapter 9, Turning tools**

## CNMG / VNMG / DNMG / WNMG

Designation	L mm	S mm	D1 mm	IC mm
WNMG 0804..	8.6	4.76	5.16	12.70
CNMG 1204..	12.9	4.76	5.16	12.70
DNMG 1504..	15.5	4.76	5.16	12.70
DNMG 1506..	15.5	6.35	5.16	12.70
VNMG 1604..	16.6	4.76	3.81	9.52




### CNMG



**-M34**  
CTPX710

DRAGONSKIN



M

75 003 ... PG 1A/08

ISO	RE mm	£	£
120404EN	0.4	<del>13.00</del>	9.77
120408EN	0.8	<del>13.00</del>	9.77
120412EN	1.2	<del>13.00</del>	9.77
120416EN	1.6	<del>13.00</del>	9.77

P	•
M	•
K	•
N	○
S	•
H	•
O	•

### VNMG



**-M34**  
CTPX710

DRAGONSKIN



M

75 009 ... PG 1A/08

ISO	RE mm	£	£
160404EN	0.4	<del>23.70</del>	17.77
160408EN	0.8	<del>23.70</del>	17.77
160412EN	1.2	<del>23.70</del>	17.77


P	•
M	•
K	•
N	○
S	•
H	•
O	•

### DNMG



**-M34**  
CTPX710

DRAGONSKIN



M

75 004 ... PG 1A/08

ISO	RE mm	£	£
150404EN	0.4	<del>18.00</del>	14.03
150408EN	0.8	<del>18.00</del>	14.03
150412EN	1.2	<del>18.00</del>	14.03
150608EN	0.8	<del>20.40</del>	15.36
150612EN	1.2	<del>20.40</del>	15.36


P	•
M	•
K	•
N	○
S	•
H	•
O	•

### WNMG



**-M34**  
CTPX710

DRAGONSKIN



M

75 008 ... PG 1A/08

ISO	RE mm	£	£
080408EN	0.8	<del>15.00</del>	11.90
080412EN	1.2	<del>15.00</del>	11.90

P	•
M	•
K	•
N	○
S	•
H	•
O	•



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com






Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield



CCGT / DCGT / VCGT

Designation	L	S	D1	IC
	mm	mm	mm	mm
CCGT 0602..	6.40	2.38	2.8	6.35
DCGT 0702..	7.75	2.38	2.8	6.35
CCGT 09T3..	9.70	3.97	4.4	9.52
VCGT 1103..	11.10	3.18	2.9	6.35
DCGT 11T3..	11.60	3.97	4.4	9.52
CCGT 1204..	12.90	4.76	5.5	12.70
VCGT 1604..	16.60	4.76	4.4	9.52
VCGT 2205..	22.10	5.56	5.5	12.70



CCGT

CERATIZIT \ Performance





ISO	RE mm	M	70 248 ...	PG 1A/90	£	£
060202FN	0.2		70200		<del>15.74</del>	11.80
060204FN	0.4		70400		<del>15.74</del>	11.80
09T302FN	0.2		71400		<del>16.11</del>	12.08
09T304FN	0.4		71600		<del>16.11</del>	12.08
09T308FN	0.8		71800		<del>16.11</del>	12.08
120404FN	0.4		72800		<del>20.57</del>	15.43
120408FN	0.8		73000		<del>20.57</del>	15.43

P	•
M	•
K	•
N	•
S	•
H	•
O	•


DCGT

CERATIZIT \ Performance




ISO	RE mm	M	70 263 ...	PG 1A/90	£	£
070202FN	0.2		70200		<del>14.25</del>	10.69
070204FN	0.4		70400		<del>14.25</del>	10.69
11T302FN	0.2		71400		<del>17.20</del>	12.90
11T304FN	0.4		71600		<del>17.20</del>	12.90
11T308FN	0.8		71800		<del>17.20</del>	12.90

P	•
M	•
K	•
N	•
S	•
H	•
O	•

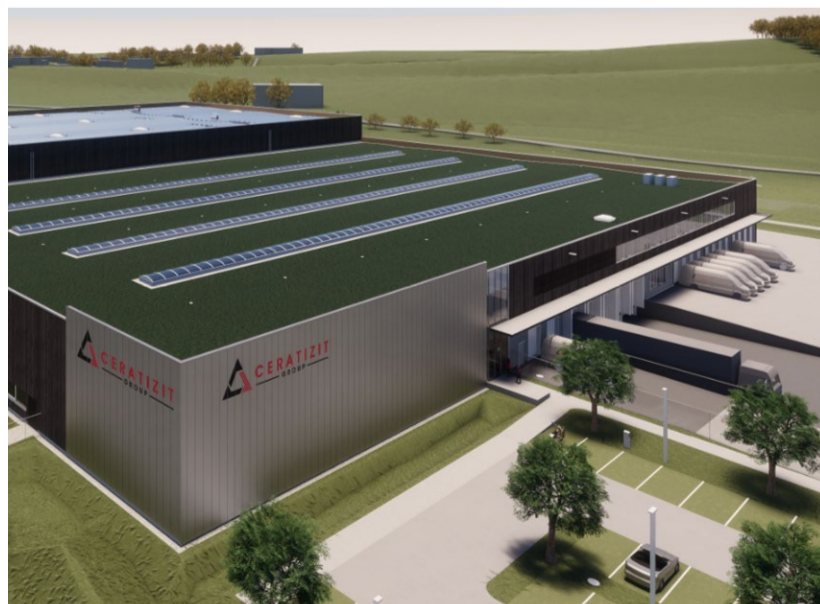

VCGT

CERATIZIT \ Performance



ISO	RE mm	M	70 282 ...	PG 1A/90	£	£
110302FN	0.2		71400		<del>21.00</del>	15.76
110304FN	0.4		71600		<del>21.00</del>	15.76
160404FN	0.4		72800		<del>26.00</del>	19.52
160408FN	0.8		73000		<del>26.00</del>	19.52
160412FN	1.2		73200		<del>26.00</del>	19.52
220530FN	3.0		75000		<del>34.60</del>	26.02

P	•
M	•
K	•
N	•
S	•
H	•
O	•

High product availability thanks to state-of-the-art logistics


Why own stock? We take care of that for you! With the cutting-edge logistics center of the cutting tools industry, we guarantee that your order will be delivered promptly.







# ECOCUT



CTPP430 – universal grade for all materials.

## The Original Multi Function Tool

The trend in machining is unmistakable: Workpieces are becoming increasingly complex and technically challenging. Production often requires a variety of tools, which can not be economically accommodated with the existing turret locations. The answer to this challenge from CERATIZIT is the multi-function tool EcoCut.




## EcoCut – Classic 1.5xD


▲ Drilling and turning tool

### Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



CERATIZIT \ Performance



Illustrations show right-hand versions

ISO designation	DMIN mm	DCONMS mm	OAL mm	LU mm	WF mm	torque moment Nm	Insert
ECC 10 R/L 1,5D 05	10	12	90	15.0	5.0	0,7	XC.T 0502..
ECC 12 R/L 1,5D 06	12	16	100	18.0	6.0	1,0	XC.T 0602..
ECC 14 R/L 1,5D 07	14	16	110	21.0	7.0	1,2	XC.T 0703..
ECC 16 R/L 1,5D 08	16	20	125	24.0	8.0	2,2	XC.T 0803..
ECC 18 R/L 1,5D 09	18	25	135	27.0	9.0	2,2	XC.T 09T3..
ECC 20 R/L 1,5D 10	20	25	150	30.0	10.0	3,2	XC.T 10T3..
ECC 25 R/L 1,5D 13	25	32	180	37.5	12.5	5,0	XC.T 1304..
ECC 32 R/L 1,5D 17	32	40	200	48.0	16.0	5,0	XC.T 1705..



70 805 ...		PG 2B/20	70 804 ...		PG 2B/20
	£	£		£	£
010	<del>192.66</del>	63.99	010	<del>192.66</del>	63.99
012	<del>195.82</del>	65.04	012	<del>195.82</del>	65.04
014	<del>200.54</del>	66.09	014	<del>200.54</del>	66.09
016	<del>203.69</del>	67.14	016	<del>203.69</del>	67.14
018	<del>234.93</del>	77.63	018	<del>234.93</del>	77.63
020	<del>264.84</del>	88.12	020	<del>264.84</del>	88.12
025	<del>305.42</del>	100.70	025	<del>305.42</del>	100.70
032	<del>346.23</del>	114.34	032	<del>346.23</del>	114.34

## EcoCut – Classic 2.25xD


▲ Drilling and turning tool

### Scope of supply:

Toolholder with 1 clamping screw + 2 spare screws and screwdriver



CERATIZIT \ Performance



Illustrations show right-hand versions


ISO designation	DMIN mm	DCONMS mm	OAL mm	LU mm	LS mm	WF mm	torque moment Nm	Insert
ECC 10 R/L 2,25D 05	10	12	69.5	22.5	42	5.0	0,7	XC.T 0502..
ECC 12 R/L 2,25D 06	12	16	78.0	27.0	45	6.0	1,0	XC.T 0602..
ECC 14 R/L 2,25D 07	14	16	83.5	31.5	45	7.0	1,2	XC.T 0703..
ECC 16 R/L 2,25D 08	16	20	94.0	36.0	50	8.0	2,2	XC.T 0803..
ECC 18 R/L 2,25D 09	18	25	109.5	40.5	56	9.0	2,2	XC.T 09T3..
ECC 20 R/L 2,25D 10	20	25	111.0	45.0	56	10.0	3,2	XC.T 10T3..
ECC 25 R/L 2,25D 13	25	32	129.0	56.5	60	12.5	5,0	XC.T 1304..
ECC 32 R/L 2,25D 17	32	40	158.0	72.0	70	16.0	5,0	XC.T 1705..



70 805 ...		PG 2B/20	70 804 ...		PG 2B/20
	£	£		£	£
110	<del>286.64</del>	94.41	110	<del>286.64</del>	94.41
112	<del>294.54</del>	97.56	112	<del>294.54</del>	97.56
114	<del>300.93</del>	99.66	114	<del>300.93</del>	99.66
116	<del>307.23</del>	101.75	116	<del>307.23</del>	101.75
118	<del>338.47</del>	112.24	118	<del>338.47</del>	112.24
120	<del>368.39</del>	121.68	120	<del>368.39</del>	121.68
125	<del>427.72</del>	141.62	125	<del>427.72</del>	141.62
132	<del>488.88</del>	159.45	132	<del>488.88</del>	159.45

## XCNT

CERATIZIT \ Performance




ISO designation	RE mm	S mm	D1 mm	IC mm
XCNT 050202EN	0.2	2.10	2.25	5.8
XCNT 050204EN	0.4	2.10	2.25	5.8
XCNT 060202EN	0.2	2.38	2.50	6.5
XCNT 060204EN	0.4	2.38	2.50	6.5
XCNT 070304EN	0.4	3.18	2.80	7.6
XCNT 080304EN	0.4	3.18	3.40	8.5
XCNT 09T304EN	0.4	3.97	3.40	9.6
XCNT 10T304EN	0.4	3.97	4.40	10.6
XCNT 10T308EN	0.8	3.97	4.40	10.6
XCNT 130404EN	0.4	4.76	5.30	13.5
XCNT 130408EN	0.8	4.76	5.30	13.5
XCNT 170508EN	0.8	5.56	5.30	17.5



-EN  
CTPP430

DRAGONSKIN



XCNT


70 386 ...		PG 1D/19
	£	£
923	<del>18.74</del>	14.06
903	<del>18.74</del>	14.06
924	<del>18.74</del>	14.06
904	<del>18.74</del>	14.06
905	<del>18.74</del>	14.06
906	<del>19.82</del>	14.27
907	<del>19.25</del>	14.47
908	<del>20.27</del>	15.20
938	<del>20.27</del>	15.20
910	<del>23.18</del>	17.39
940	<del>23.18</del>	17.39
912	<del>24.44</del>	18.34

P	●
M	●
K	○
N	○
S	○
H	○
O	○






# GROOVING TOOLS



SX System – first choice system for parting off.



M1 – first choice chipbreaker for parting off.





TX System – first choice grooving system for all materials and applications.



### MonoClamp – Radial Blade SX reinforced

CERATIZIT \ Performance





Illustrations show right-hand versions

ISO designation	CW mm	H mm	B mm	OAL mm	b <sub>1</sub> mm	CODX mm	CDX mm	for grooving inserts	70 879 ...	PG 2A/25
XLCF L 2608-SX3	3	26	2.5	110	8	44	22	SX .3..	213	£ 164.08 / £ 54.55
XLCF L 3208-SX3	3	32	2.5	110	8	66	33	SX .3..	203	£ 154.29 / £ 51.40
XLCF R 2608-SX3	3	26	2.5	110	8	44	22	SX .3..	013	£ 164.08 / £ 54.55
XLCF R 3208-SX3	3	32	2.5	110	8	66	33	SX .3..	003	£ 154.29 / £ 51.40
XLCF L 3208-SX4	4	32	3.4	110	8	66	33	SX .4..	204	£ 154.29 / £ 51.40
XLCF R 3208-SX4	4	32	3.4	110	8	66	33	SX .4..	004	£ 154.29 / £ 51.40

1) can be used in both directions

### MonoClamp – Radial Blade SX Standard


CERATIZIT \ Performance



ISO designation	CW mm	H mm	B mm	b <sub>1</sub> mm	OAL mm	CDX mm	for grooving inserts	70 884 ...	PG 2A/25
XLCF L 2602-SX2	2	26	2.4	1.5	110	25	SX .2..	212	£ 107.17 / £ 35.67
XLCF L 3202-SX2	2	32	2.4	1.5	150	25	SX .2..	202	£ 112.13 / £ 36.72
XLCF R 2602-SX2	2	26	2.4	1.5	110	25	SX .2..	012	£ 107.17 / £ 35.67
XLCF R 3202-SX2	2	32	2.4	1.5	150	25	SX .2..	002	£ 112.13 / £ 36.72
XLCF N 2603-SX3	3	26	2.4		110	35	SX .3..	113	£ 107.17 / £ 35.67
XLCF N 3203-SX3	3	32	2.4		150	50	SX .3..	103	£ 112.13 / £ 36.72
XCLF N 2604-SX4	4	26	3.2		110	40	SX .4..	114	£ 107.17 / £ 35.67
XCLF N 3204-SX4	4	32	3.2		150	50	SX .4..	104	£ 112.13 / £ 36.72


### MonoClamp – Radial Monoholder SX

CERATIZIT \ Performance



Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAL mm	LH mm	l <sub>5</sub> mm	OAH mm	CDX mm	a mm	for grooving inserts
E16 R/L 0026-1616K-K-SX2	16	16	2	15.20	125	32	33	26	26	4	SX .2..
E20 R/L 0026-2020K-K-SX2	20	20	2	19.20	125	32	33	31	26	5	SX .2..
E16 R/L 0026-1616K-K-SX3	16	16	3	14.75	125	32	33	26	26	4	SX .3..
E20 R/L 0026-2020K-K-SX3	20	20	3	18.75	125	32	33	31	26	5	SX .3..
E25 R/L 0026-2525M-K-SX3	25	25	3	23.75	150	33		31	26		SX .3..
E20 R/L 0033-2020K-K-SX4	20	20	4	18.30	125	39	40	32	33	5	SX .4..
E25 R/L 0033-2525M-K-SX4	25	25	4	23.30	150	41	42	37	33	5	SX .4..




UKS Left-hand		UKS Right-hand	
70 846 ...	PG 2C/71	70 846 ...	PG 2C/71
21601	£ 122.07 / £ 39.86	21600	£ 122.07 / £ 39.86
22001	£ 143.27 / £ 47.21	22000	£ 143.27 / £ 47.21
31601	£ 122.07 / £ 39.86	31600	£ 122.07 / £ 39.86
32001	£ 143.27 / £ 47.21	32000	£ 143.27 / £ 47.21
32501	£ 151.07 / £ 50.35	32500	£ 151.07 / £ 50.35
42001	£ 143.27 / £ 47.21	42000	£ 143.27 / £ 47.21
42501	£ 151.07 / £ 50.35	42500	£ 151.07 / £ 50.35

Spare parts for grooving inserts  
SX .2..  
SX .3..  
SX .4..


UKS	
Ejector SX	
70 950 ...	
26.23	836
26.23	836
26.23	837

### Insert SX

▲ Specially developed geometry with negative edge-chamfers available in right, left and neutral types



CERATIZIT \ Performance



Designation	IH	CW <sub>+/-0.05</sub> mm	70 342 ...	PG 10/72
SX E2.00 L 6	L	2	612	£ 44.62 / £ 10.97
SX E3.00 L 6	L	3	613	£ 45.56 / £ 11.66
SX E4.00 L 6	L	4	614	£ 46.42 / £ 12.32
SX E2.00 N 0.20	N	2	622	£ 45.35 / £ 11.51
SX E3.00 N 0.20	N	3	623	£ 46.32 / £ 12.24
SX E4.00 N 0.30	N	4	624	£ 47.22 / £ 12.92
SX E2.00 R 6	R	2	602	£ 44.62 / £ 10.97
SX E3.00 R 6	R	3	603	£ 45.56 / £ 11.66
SX E4.00 R 6	R	4	604	£ 46.42 / £ 12.32



P	●
M	●
K	●
N	○
S	●
H	●
O	○



## MonoClamp – Radial/Axial TX Grooving Holder 0° 6 mm cutting depth

- ▲ For radial and axial grooving
- ▲ Cutting width 0.5–6.3 mm

CERATIZIT \ Performance

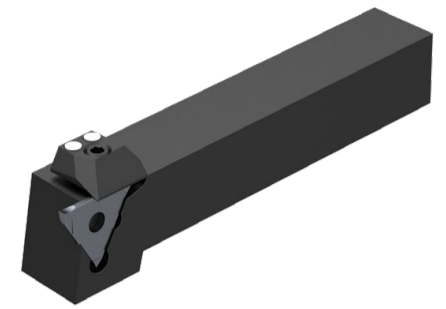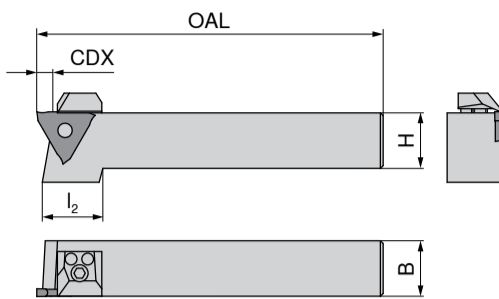

Illustrations show right-hand versions

ISO designation	H mm	B $\pm 0.1$ mm	OAL mm	l <sub>2</sub> mm	CDX mm	for grooving inserts
R 207.1212.1	12	12	100	24	4	TX R/N/L ...1
R 207.1616.1	16	16	125	22	4	TX R/N/L ...1
R 207.2020.1	20	20	125	21	4	TX R/N/L ...1
R 207.2525.1	25	25	150		4	TX R/N/L ...1
R 207.1212.2	12	12	100	24	6	TX R/N/L ...2
R 207.1616.2	16	16	125	22	6	TX R/N/L ...2
R 207.2020.2	20	20	125	21	6	TX R/N/L ...2
R 207.2525.2	25	25	150		6	TX R/N/L ...2
R 207.1212.3	12	12	100	24	6	TX R/N/L ...3
R 207.1616.3	16	16	125	22	6	TX R/N/L ...3
R 207.2020.3	20	20	125	21	6	TX R/N/L ...3
R 207.2525.3	25	25	150		6	TX R/N/L ...3
R 207.3232.3	32	32	170		6	TX R/N/L ...3


Right-hand

73 500 ...	PG	Y6
£	£	
112	<del>258.13</del>	141.97
116	<del>290.38</del>	126.71
120	<del>178.67</del>	98.27
125	<del>188.01</del>	103.41
212	<del>258.13</del>	141.97
216	<del>290.38</del>	126.71
220	<del>178.67</del>	98.27
225	<del>188.01</del>	103.41
312	<del>258.13</del>	141.97
316	<del>290.38</del>	126.71
320	<del>178.67</del>	98.27
325	<del>188.01</del>	103.41
332	<del>218.52</del>	120.18

## Radial TX insert for corner recessing

- ▲ Full radius for cutting width 0.5–5.0 mm

CERATIZIT \ Performance





Neutral

Designation	CRE mm	CW $\pm 0.05$ mm	PDPT mm	73 304 ...	PG	Y6
					£	£
TX N 0010.20.2	1.0	2	0.7	204	<del>61.92</del>	34.06
TX N 0015.30.3	1.5	3	1.0	206	<del>65.48</del>	36.01

## TX insert for fine and copy turning

CERATIZIT \ Performance




Neutral

Designation	CW $\pm 0.03$ mm	73 303 ...	PG	Y6
			£	£
TX N 0150.02.1	1.5	204	<del>50.93</del>	28.01
TX N 0200.02.1	2.0	206	<del>50.93</del>	28.01
TX N 0200.04.1	2.0	208	<del>50.93</del>	28.01
TX N 0300.06.2	3.0	212	<del>53.71</del>	29.54
TX N 0300.02.2	3.0	210	<del>53.71</del>	29.54
TX N 0300.08.2	3.0	214	<del>53.71</del>	29.54
TX N 0400.08.3	4.0	218	<del>54.16</del>	29.79
TX N 0400.02.3	4.0	216	<del>54.16</del>	29.79
TX N 0400.12.3	4.0	220	<del>54.16</del>	29.79

## TX insert for circlip grooves

- ▲ For circlip grooves according to DIN 471 / 472

CERATIZIT \ Performance




Neutral

Designation	CW $\pm 0.05$ mm	a $\pm 0.02$ mm	73 300 ...	PG	Y6
				£	£
TX N 0050.00.1	0.57	0.07	204	<del>40.80</del>	22.44
TX N 0060.00.1	0.67	0.07	206	<del>40.80</del>	22.44
TX N 0070.00.1	0.77	0.08	208	<del>40.80</del>	22.44
TX N 0080.00.1	0.87	0.08	210	<del>40.80</del>	22.44
TX N 0090.00.1	0.97	0.08	212	<del>40.80</del>	22.44
TX N 0100.00.1	1.07	0.09	214	<del>40.80</del>	22.44
TX N 0110.00.1	1.24	0.15	216	<del>40.80</del>	22.44
TX N 0130.00.1	1.44	0.15	218	<del>40.80</del>	22.44
TX N 0160.00.1	1.74	0.20	220	<del>40.80</del>	22.44
TX N 0185.00.1	1.99	0.20	222	<del>40.80</del>	22.44
TX N 0215.00.2	2.29	0.20	224	<del>40.80</del>	22.44
TX N 0265.00.2	2.79	0.20	226	<del>40.80</del>	22.44
TX N 0315.00.3	3.29	0.20	228	<del>46.54</del>	25.60

## Tool data always at your fingertips

Cutting data and CAD models for day-to-day assistance

In addition to detailed cutting data we also offer 2D and 3D models to assist you with your tool management or for simulating an operation. All data for this Service is available for you in our Online Shop.

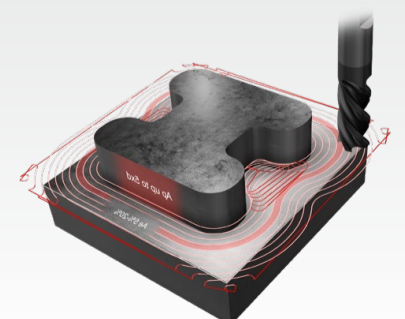

**Technical support: 0800 073 2 075**  
3 time served engineers, available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your guaranteed free express delivery



When you see this logo it's in stock in Sheffield



# MINIATURE TURNING TOOLS



Ultra mini system – for micro diameter internal features from 2 mm up to 8 mm.



MiniCut system – for small diameter internal features from 8 mm onwards.




### UltraMini – Inserts for internal turning and profiling

▲ CDX = Maximum depth of cut when turning outwards



WNT \ Performance

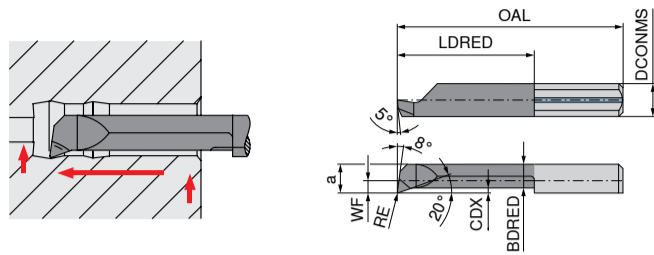

ISO designation	DCONMS <sub>h6</sub> mm	WF mm	DMIN mm	a mm	OAL mm	LDRED mm	CDX mm	BDRED mm	RE mm
R 050.2-5	4		2.0	1.7	19	5	0.1	1.5	0.05
R 050.2-10	4		2.0	1.7	24	10	0.1	1.5	0.05
R 050.2-15	4		2.0	1.7	29	15	0.1	1.5	0.05
R 050.3-10	4	0.6	2.8	2.6	24	10	0.2	2.3	0.10
R 050.3-16	4	0.6	2.8	2.6	30	16	0.2	2.3	0.10
R 050.3-20	4	0.6	2.8	2.6	34	20	0.2	2.3	0.10
R 050.4-10	4	1.5	4.0	3.5	24	10	0.3	3.0	0.10
R 050.4-16	4	1.5	4.0	3.5	30	16	0.3	3.0	0.10
R 050.4-20	4	1.5	4.0	3.5	34	20	0.3	3.0	0.10
R 050.4-24	4	1.5	4.0	3.5	38	24	0.3	3.0	0.10
R 050.4-28	4	1.5	4.0	3.5	42	28	0.3	3.0	0.10
R 050.5-10	5	1.9	5.0	4.4	25	10	0.5	3.8	0.15
R 050.5-15	5	1.9	5.0	4.4	30	15	0.5	3.8	0.15
R 050.5-20	5	1.9	5.0	4.4	35	20	0.5	3.8	0.15
R 050.5-25	5	1.9	5.0	4.4	40	25	0.5	3.8	0.15
R 050.5-30	5	1.9	5.0	4.4	45	30	0.5	3.8	0.15
R 050.5-35	5	1.9	5.0	4.4	50	35	0.5	3.8	0.15
R 050.6-15	6	2.3	6.0	5.3	30	15	0.5	4.5	0.15
R 050.6-22	6	2.3	6.0	5.3	37	22	0.5	4.5	0.15
R 050.6-25	6	2.3	6.0	5.3	40	25	0.5	4.5	0.15
R 050.6-30	6	2.3	6.0	5.3	45	30	0.5	4.5	0.15
R 050.6-35	6	2.3	6.0	5.3	50	35	0.5	4.5	0.15
R 050.6-42	6	2.3	6.0	5.3	57	42	0.5	4.5	0.15
R 050.7-20	7	2.8	6.8	6.3	35	20	0.6	5.5	0.15
R 050.7-25	7	2.8	6.8	6.3	40	25	0.6	5.5	0.15
R 050.7-30	7	2.8	6.8	6.3	45	30	0.6	5.5	0.15
R 050.7-35	7	2.8	7.0	6.3	50	35	0.6	5.5	0.15
R 050.7-40	7	2.8	7.0	6.3	55	40	0.6	5.5	0.15
R 050.7-45	7	2.8	7.0	6.3	60	45	0.6	5.5	0.15
R 050.7-50	7	2.8	7.0	6.3	65	50	0.6	5.5	0.15

P	●
M	●
K	●
N	●
S	○
H	○
O	●



TiN



Right-hand


73 004 ...	PG	Y5	£	£
520			<del>61.13</del>	33.62
521			<del>66.63</del>	36.65
522			<del>66.07</del>	36.34
531			<del>78.26</del>	38.65
530			<del>77.08</del>	42.39
532			<del>76.07</del>	42.33
541			<del>69.28</del>	38.10
540			<del>69.28</del>	38.10
542			<del>73.84</del>	40.61
545			<del>86.55</del>	47.60
546			<del>94.08</del>	52.14
551			<del>65.55</del>	36.05
552			<del>69.83</del>	38.40
550			<del>71.78</del>	39.43
553			<del>80.98</del>	44.54
554			<del>88.04</del>	48.97
556			<del>103.35</del>	56.85
561			<del>68.54</del>	37.70
560			<del>74.63</del>	41.05
562			<del>79.36</del>	43.65
563			<del>90.18</del>	49.60
564			<del>103.35</del>	56.85
565			<del>117.53</del>	64.64
572			<del>76.15</del>	41.88
573			<del>84.15</del>	51.78
574			<del>95.47</del>	52.51
575			<del>110.08</del>	60.55
576			<del>122.62</del>	67.44
577			<del>127.56</del>	70.16
578			<del>132.08</del>	76.93

### UltraMini – Inserts for internal turning and chamfering

▲ CDX = Maximum depth of cut when turning outwards



WNT \ Performance

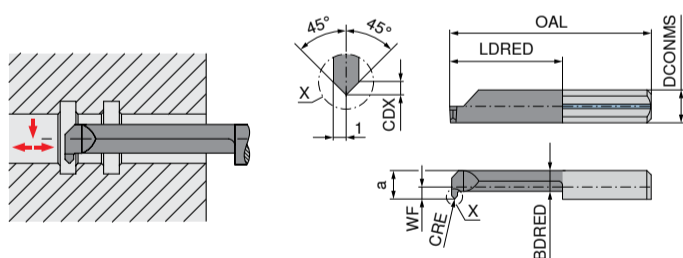

ISO designation	DCONMS <sub>h6</sub> mm	WF mm	DMIN mm	a mm	OAL mm	LDRED mm	CDX mm	BDRED mm	CRE mm
R 060.5-15	5	1.9	5.0	4.4	30	15	0.7	3.3	0.2
R 060.5-20	5	1.9	5.0	4.4	35	20	0.7	3.3	0.2
R 060.7-20	7	2.7	6.8	6.3	35	20	0.7	3.8	0.2

P	●
M	●
K	●
N	●
S	○
H	○
O	●



TiN



Right-hand

73 006 ...	PG	Y5	£	£
551			<del>62.63</del>	34.45
550			<del>69.74</del>	38.34
570			<del>72.73</del>	40.00



## Stock around the clock!



### Tool Supply 24/7

If you install a Tool-O-Mat it means that we take on all the procurement and stocking costs for you. You have 100 % availability of all tools at all times and without expenditure.



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield



## UltraMini – Inserts for Internal Grooving



WNT \ Performance



TiN




Right-hand

ISO designation	DCONMS <sub>qs</sub>	WF	DMIN	a	OAL	LDRED	CDX	BDRD	CW	73 002 ... PG Y5		
										£	£	
R 004.0100-10	4	1.5	4.0	3.5	24	10	0.8	2.4	1.0	540	61.74	33.95
R 004.0100-16	4	1.5	4.0	3.5	30	16	0.8	2.4	1.0	541	75.37	41.46
R 004.0100-20	4	1.5	4.0	3.5	34	20	0.8	2.4	1.0	542	81.23	44.68
R 005.0100-10	5	1.9	5.0	4.4	25	10	1.0	3.3	1.0	650	60.72	33.39
R 005.0150-10	5	1.9	5.0	4.4	25	10	1.0	3.3	1.5	654	62.06	34.58
R 005.0200-10	5	1.9	5.0	4.4	25	10	1.0	3.3	2.0	658	62.06	34.58
R 005.0100-15	5	1.9	5.0	4.4	30	15	1.0	3.3	1.0	651	71.12	39.12
R 005.0150-15	5	1.9	5.0	4.4	30	15	1.0	3.3	1.5	655	71.12	39.12
R 005.0200-15	5	1.9	5.0	4.4	30	15	1.0	3.3	2.0	659	71.12	39.12
R 005.0100-20	5	1.9	5.0	4.4	35	20	1.0	3.3	1.0	551	80.52	44.29
R 005.0150-20	5	1.9	5.0	4.4	35	20	1.0	3.3	1.5	552	80.52	44.29
R 005.0200-20	5	1.9	5.0	4.4	35	20	1.0	3.3	2.0	553	80.52	44.29
R 005.0100-25	5	1.9	5.0	4.4	40	25	1.0	3.3	1.0	652	80.22	49.07
R 005.0150-25	5	1.9	5.0	4.4	40	25	1.0	3.3	1.5	656	80.22	49.07
R 005.0200-25	5	1.9	5.0	4.4	40	25	1.0	3.3	2.0	750	80.70	49.39
R 005.0100-30	5	1.9	5.0	4.4	45	30	1.0	3.3	1.0	653	80.30	54.61
R 005.0150-30	5	1.9	5.0	4.4	45	30	1.0	3.3	1.5	657	80.30	54.61
R 005.0200-30	5	1.9	5.0	4.4	45	30	1.0	3.3	2.0	751	100.05	55.03
R 005.0100-35	5	1.9	5.0	4.4	50	35	1.0	3.3	1.0	680	100.30	59.61
R 006.0100-10	6	2.3	6.0	5.3	25	10	1.8	3.4	1.0	660	61.84	34.01
R 006.0150-10	6	2.3	6.0	5.3	25	10	1.8	3.4	1.5	664	60.22	32.57
R 006.0200-10	6	2.3	6.0	5.3	25	10	1.8	3.4	2.0	668	61.84	34.01
R 006.0100-15	6	2.3	6.0	5.3	30	15	1.8	3.4	1.0	661	71.70	39.43
R 006.0150-15	6	2.3	6.0	5.3	30	15	1.8	3.4	1.5	665	71.70	39.43
R 006.0200-15	6	2.3	6.0	5.3	30	15	1.8	3.4	2.0	669	71.70	39.43
R 006.0100-22	6	2.3	6.0	5.3	37	22	1.8	3.4	1.0	561	81.09	44.60
R 006.0150-22	6	2.3	6.0	5.3	37	22	1.8	3.4	1.5	562	81.09	44.60
R 006.0200-22	6	2.3	6.0	5.3	37	22	1.8	3.4	2.0	563	81.09	44.60
R 006.0100-25	6	2.3	6.0	5.3	40	25	1.8	3.4	1.0	662	80.70	49.39
R 006.0150-25	6	2.3	6.0	5.3	40	25	1.8	3.4	1.5	666	80.70	49.39
R 006.0200-25	6	2.3	6.0	5.3	40	25	1.8	3.4	2.0	760	80.70	49.39
R 006.0100-30	6	2.3	6.0	5.3	45	30	1.8	3.4	1.0	663	100.05	55.03
R 006.0150-30	6	2.3	6.0	5.3	45	30	1.8	3.4	1.5	667	100.05	55.03
R 006.0200-30	6	2.3	6.0	5.3	45	30	1.8	3.4	2.0	761	100.05	55.03
R 006.0100-35	6	2.3	6.0	5.3	50	35	1.8	3.4	1.0	682	100.30	59.61
R 006.0150-35	6	2.3	6.0	5.3	50	35	1.8	3.4	1.5	684	100.30	59.61
R 006.0100-42	6	2.3	6.0	5.3	57	42	1.8	3.4	1.0	685	121.69	66.94
R 007.0100-10	7	2.7	6.8	6.3	25	10	2.5	3.8	1.0	570	62.06	34.58
R 007.0150-10	7	2.7	6.8	6.3	25	10	2.5	3.8	1.5	575	62.06	34.58
R 007.0200-10	7	2.7	6.8	6.3	25	10	2.5	3.8	2.0	670	62.06	34.58
R 007.0100-15	7	2.7	6.8	6.3	30	15	2.5	3.8	1.0	571	72.46	39.85
R 007.0150-15	7	2.7	6.8	6.3	30	15	2.5	3.8	1.5	576	72.46	39.85
R 007.0200-15	7	2.7	6.8	6.3	30	15	2.5	3.8	2.0	671	80.30	38.11
R 007.0100-22	7	2.7	6.8	6.3	37	22	2.5	3.8	1.0	572	82.77	45.53
R 007.0150-22	7	2.7	6.8	6.3	37	22	2.5	3.8	1.5	577	82.77	45.53
R 007.0200-22	7	2.7	6.8	6.3	37	22	2.5	3.8	2.0	672	82.77	45.53
R 007.0100-25	7	2.7	6.8	6.3	40	25	2.5	3.8	1.0	573	90.75	49.91
R 007.0150-25	7	2.7	6.8	6.3	40	25	2.5	3.8	1.5	578	90.75	49.91
R 007.0200-25	7	2.7	6.8	6.3	40	25	2.5	3.8	2.0	673	90.43	49.19
R 007.0100-30	7	2.7	6.8	6.3	45	30	2.5	3.8	1.0	574	101.75	55.96
R 007.0150-30	7	2.7	6.8	6.3	45	30	2.5	3.8	1.5	579	90.43	54.17
R 007.0200-30	7	2.7	6.8	6.3	45	30	2.5	3.8	2.0	674	95.47	52.51
R 007.0100-35	7	2.7	7.0	6.3	50	35	2.5	3.8	1.0	688	111.44	61.29
R 007.0150-35	7	2.7	7.0	6.3	50	35	2.5	3.8	1.5	690	111.44	61.29
R 007.0200-35	7	2.7	7.0	6.3	50	35	2.5	3.8	2.0	692	111.44	61.29
R 007.0100-40	7	2.7	7.0	6.3	55	40	2.5	3.8	1.0	700	123.57	67.96
R 007.0150-40	7	2.7	7.0	6.3	55	40	2.5	3.8	1.5	702	123.57	67.96
R 007.0100-45	7	2.7	7.0	6.3	60	45	2.5	3.8	1.0	712	134.23	73.83
R 007.0100-50	7	2.7	7.0	6.3	65	50	2.5	3.8	1.0	714	143.54	78.94

P	•
M	•
K	•
N	•
S	○
H	○
O	•

## Internal turning and profiling, grooving and chamfering

From Diameter 2.0 mm onwards up to a turning depth of 15.0 mm

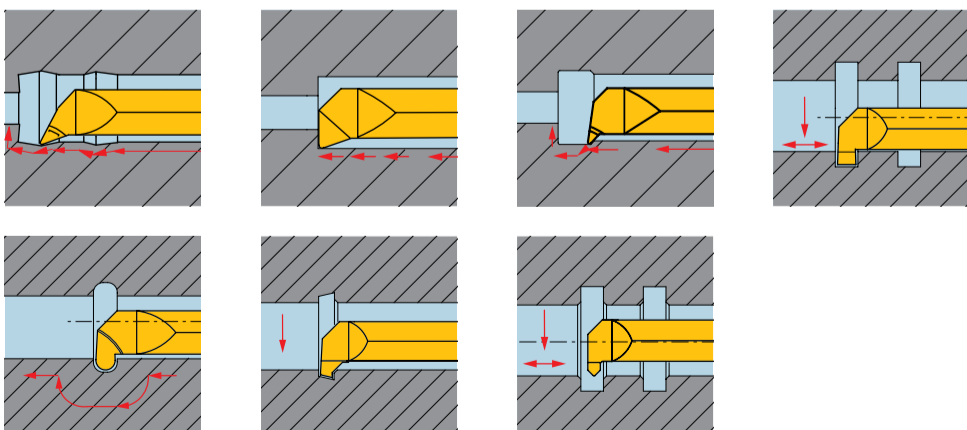

Miniature turning tools guide (Main catalogue 2024)

Cutting Data	58-61	Broaching – Recommendations for Correct Use	62
Symbol explanation, coatings and thread types	63		


## UltraMini – Standard tool holder for cutting inserts

- ▲ double ended
- ▲ Machining diameter from Ø 0.5 mm

Scope of supply:

Tool holder with allen key

WNT \ Performance

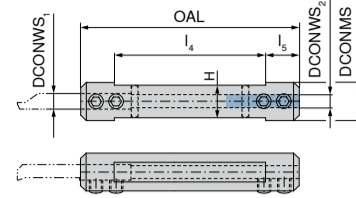


Designation	DCONWS <sub>1</sub>	DCONWS <sub>2</sub>	DCONMS	OAL	I <sub>4</sub>	I <sub>5</sub>	H	73 080 ... PG Y5		
								£	£	
645.0012-D	4	5	12	75	55	10	10.3	163	230.44	126.74
645.0016-D	4	5	16	75	55	10	14.0	164	242.05	133.13
645.0020-D	4	5	20	90	70	10	18.0	165	260.65	143.36
676.0016-D	6	7	16	75	55	10	14.0	166	242.05	133.13
676.0020-D	6	7	20	90	70	10	18.0	167	260.65	143.36

## UltraMini – Quick change tool holder for cutting inserts

Scope of supply:

Tool holder, lock nut and clamping wedge

WNT \ Performance

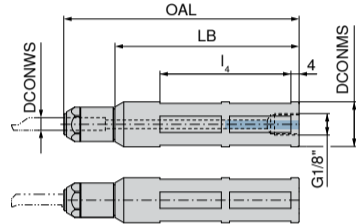

Designation	DCONWS	DCONMS <sub>qs</sub>	OAL	LB	I <sub>4</sub>	73 089 ... PG Y5		
						£	£	
UM600H.0012.4	4	12.00	115	90	64	124	434.99	239.25
UM600H.0016.4	4	16.00	115	90	64	164	394.64	217.06
UM600H.001905.4	4	19.05	115	90	64	194	423.47	232.91
UM600H.0020.4	4	20.00	115	90	64	204	447.74	229.74
UM600H.0022.4	4	22.00	115	90	64	224	424.04	233.70
UM600H.0025.4	4	25.00	115	90	64	254	433.55	238.46
UM600H.00254.4	4	25.40	115	90	64	264	442.20	243.21
UM600H.0028.4	4	28.00	115	90	64	284	442.20	243.21
UM600H.0012.5	5	12.00	115	90	64	125	434.99	239.25
UM600H.0016.5	5	16.00	115	90	64	165	394.64	217.06
UM600H.001905.5	5	19.05	115	90	64	195	423.47	232.91
UM600H.0020.5	5	20.00	115	90	64	205	447.74	229.74
UM600H.0022.5	5	22.00	115	90	64	225	424.04	233.70
UM600H.0025.5	5	25.00	115	90	64	255	433.55	238.46
UM600H.00254.5	5	25.40	115	90	64	265	442.20	243.21
UM600H.0028.5	5	28.00	115	90	64	285	442.20	243.21
UM600H.0012.6	6	12.00	115	90	64	126	434.99	239.25
UM600H.0016.6	6	16.00	115	90	64	166	394.64	217.06
UM600H.001905.6	6	19.05	115	90	64	196	423.47	232.91
UM600H.0020.6	6	20.00	115	90	64	206	447.74	229.74
UM600H.0022.6	6	22.00	115	90	64	226	424.04	233.70
UM600H.0025.6	6	25.00	115	90	64	256	433.55	238.46
UM600H.00254.6	6	25.40	115	90	64	266	442.20	243.21
UM600H.0028.6	6	28.00	115	90	64	286	442.20	243.21
UM600H.0012.7	7	12.00	115	90	64	127	434.99	239.25
UM600H.0016.7	7	16.00	115	90	64	167	394.64	217.06
UM600H.001905.7	7	19.05	115	90	64	197	423.47	232.91
UM600H.0020.7	7	20.00	115	90	64	207	447.74	229.74
UM600H.0022.7	7	22.00	115	90	64	227	424.04	233.70
UM600H.0025.7	7	25.00	115	90	64	257	433.55	238.46
UM600H.00254.7	7	25.40	115	90	64	267	442.20	243.21
UM600H.0028.7	7	28.0						




### MiniCut – Internal undercut insert

▲ CDX =  $a_{pmax}$

WNT \ Performance



CWX500

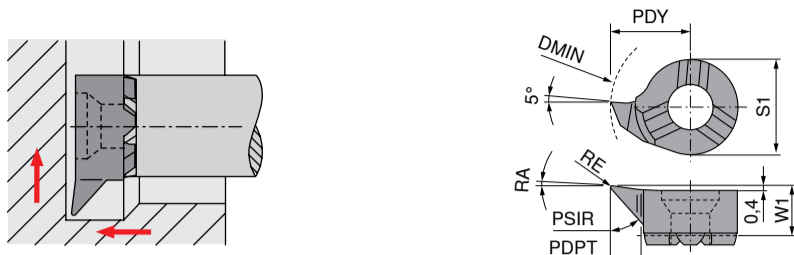

Size	ISO designation	DMIN mm	PDPT mm	W1 mm	PDY mm	S1 mm	RE mm	CDX mm	PSIR °	RA °
08	8,00. R.30°1,0	7.8	1.0	3.5	4.65	6	0.2	0.4	30	3
	8,00. R.47°1,2	7.8	1.2	3.5	4.65	6	0.2	0.4	47	3
11	11,00. R.30°2,3	11.0	2.3	4.2	6.70	8	0.2	0.6	30	3
	11,00. R.47°2,3	11.0	2.3	4.2	6.70	8	0.2	0.6	47	3
14	13,70. R.47°3,0	13.7	3.0	5.3	8.70	9	0.2	0.8	47	3
	13,70. R.30°4,0	13.7	4.0	5.3	8.70	9	0.2	0.8	30	3



Right-hand

73 326 ...	PG	Y5
010	£	£
012	<del>57.04</del>	31.35
423	<del>49.52</del>	27.24
423	<del>55.68</del>	30.62
323	<del>48.22</del>	26.52
530	<del>49.52</del>	27.24
540	<del>57.04</del>	31.35

P	•
M	•
K	•
N	•
S	•
H	•
O	•

### MiniCut – Steel Tool holder

WNT \ Performance

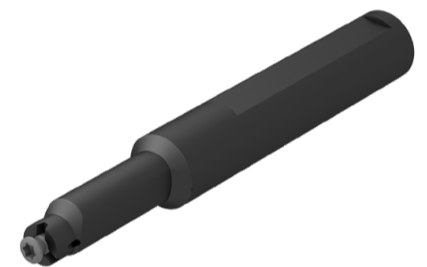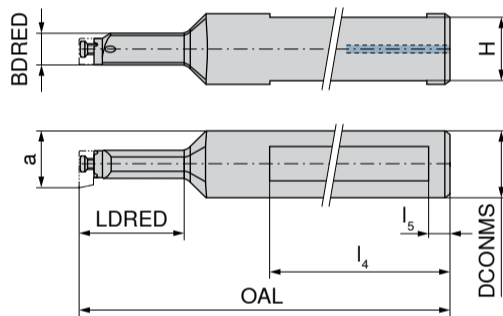

Designation	a mm	DCONMS <sub>r7</sub> mm	OAL mm	l <sub>4</sub> mm	LDRED mm	BDRED mm	H mm	l <sub>5</sub> mm
8,00/16.N.12.1,0	7.8	16	80	60	12	15.0	5	
8,00/16.N.22.1,0	7.8	16	90	60	22	7.0	5	
11,00/16.N.16.2,3	10.7	16	97	60	16	14.5	5	
11,00/16.N.29.2,3	10.7	16	110	60	29	9.5	5	
14,00/16.N.18.4,0	13.8	16	100	60	18	11.0	5	
14,00/16.N.38.4,0	13.8	16	120	60	38	14.5	5	

73 522 ...	PG	Y5
012	£	£
122	<del>255.44</del>	140.30
016	<del>292.72</del>	161.00
016	<del>255.44</del>	140.30
129	<del>292.72</del>	161.00
018	<del>292.72</del>	161.00
138	<del>292.72</del>	161.00

# UP2DATE

New developments and product enhancements

cutting.tools/gb/en/up2date



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield



## SOLID CARBIDE MILLING CUTTERS



SilverLine – first choice for high performance solid carbide milling applications in all materials.



AluLine – first choice for high performance solid carbide milling of aluminium.



CircularLine – first choice for high performance trochoidal milling and modern CAM machining strategies.



Ti1000 Standard Line – cost effective solution for all standard applications and materials.

# FIRST CHOICE FOR HIGH PERFORMANCE SOLID CARBIDE MILLING APPLICATIONS



### Optimised core geometry

- ▲ Less vibration even with high angles of contact
- ▲ Significantly increased fracture resistance

### Latest Dragonskin coating

- ▲ Processing of almost all materials
- ▲ Increased temperature resistance
- ▲ Wet and dry machining

### Improved chip clearance


- ▲ Smoother processing
- ▲ Lower forces during chip formation
- ▲ Reduced heat generation

### Expanded product range

- ▲ Greater range of diameters
- ▲ Increased range of flute options
- ▲ HA shank options
- ▲ Versions with thro' coolant
- ▲ Roughing-finishing milling cutters
- ▲ Rough milling cutters
- ▲ Full slot milling cutters



## SilverLine – End milling cutter

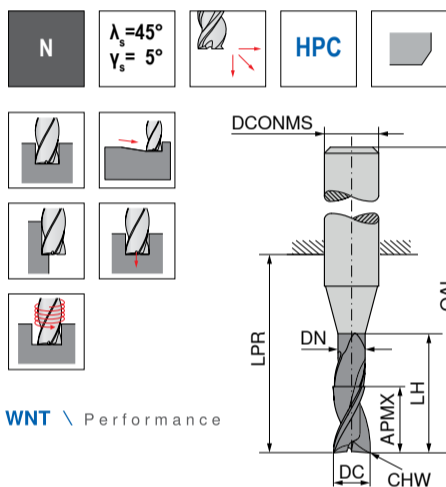

WNT \ Performance

DC <sub>16</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>16</sub>	CHW	ZEFP
mm	mm	mm	mm	mm	mm	mm	mm	
3.0	8	2.9	15	21	57	6	0.1	3
3.5	11	3.4	16	21	57	6	0.1	3
4.0	8	3.9	15	18	54	6	0.1	3
4.0	11	3.9	16	21	57	6	0.1	3
4.0	16			26	62	6	0.1	3
4.5	13	4.4	19	21	57	6	0.1	3
5.0	9	4.9	16	18	54	6	0.1	3
5.0	13	4.9	19	21	57	6	0.1	3
5.0	17			26	62	6	0.1	3
5.5	13	5.4	19	21	57	6	0.1	3
6.0	10	5.9	17	18	54	6	0.2	3
6.0	13	5.9	19	21	57	6	0.2	3
6.0	18			26	62	6	0.2	3
6.5	19	6.3	25	27	63	8	0.2	3
7.0	19	6.8	25	27	63	8	0.2	3
7.5	19	7.3	25	27	63	8	0.2	3
8.0	12	7.8	20	22	58	8	0.2	3
8.0	19	7.8	25	27	63	8	0.2	3
8.0	24			32	68	8	0.2	3
8.5	22	8.2	30	32	72	10	0.2	3
9.0	22	8.7	30	32	72	10	0.2	3
9.5	22	9.2	30	32	72	10	0.2	3
10.0	14	9.7	24	26	66	10	0.2	3
10.0	22	9.7	30	32	72	10	0.2	3
10.0	30			40	80	10	0.2	3
12.0	16	11.7	26	28	73	12	0.2	3
12.0	26	11.7	36	38	83	12	0.2	3
12.0	36			48	93	12	0.2	3
14.0	18	13.7	28	30	75	14	0.2	3
14.0	26	13.7	36	38	83	14	0.2	3
14.0	42			54	99	14	0.2	3
16.0	22	15.5	32	34	82	16	0.2	3
16.0	32	15.5	42	44	92	16	0.2	3
16.0	48			60	108	16	0.2	3
18.0	24	17.5	34	36	84	18	0.2	3
18.0	32	17.5	42	44	92	18	0.2	3
18.0	54			66	114	18	0.2	3
20.0	26	19.5	40	42	92	20	0.2	3
20.0	38	19.5	52	54	104	20	0.2	3
20.0	60			76	126	20	0.2	3

P	•	•	•
M	•	•	•
K	•	•	•
N	○	○	○
S	•	•	•
H			
O			

UKS		UKS		UKS	
DPB72S		DPB72S		DPB72S	
DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
≈DIN 6527		≈DIN 6527		≈DIN 6527	
50 966 ...	PG V0/5A	50 966 ...	PG V0/5A	50 966 ...	PG V0/5A
£	£	£	£	£	£
03200	<del>79.95</del> 55.96	03700	<del>79.95</del> 55.96	04400	<del>81.29</del> 56.90
04100	<del>77.10</del> 53.97	04200	<del>77.10</del> 53.97	05400	<del>81.29</del> 56.90
05100	<del>77.10</del> 53.97	04700	<del>79.95</del> 55.96	06400	<del>90.15</del> 63.11
06100	<del>80.10</del> 56.12	05200	<del>77.10</del> 53.97	07200	<del>97.55</del> 68.28
08100	<del>81.10</del> 63.77	05700	<del>83.91</del> 58.73	07700	<del>97.55</del> 68.28
10100	<del>144.01</del> 100.81	06200	<del>81.11</del> 56.80	08400	<del>101.27</del> 70.89
12100	<del>201.92</del> 141.34	06700	<del>97.55</del> 68.28	09200	<del>162.56</del> 113.80
14100	<del>249.37</del> 174.55	07200	<del>97.55</del> 68.28	09700	<del>162.56</del> 113.80
16100	<del>301.84</del> 211.29	07700	<del>97.55</del> 68.28	10200	<del>159.58</del> 111.71
18100	<del>416.46</del> 291.53	08200	<del>94.72</del> 66.31	10400	<del>180.29</del> 126.19
20100	<del>510.34</del> 357.24	08700	<del>162.56</del> 113.80	12400	<del>244.68</del> 171.28
		09200	<del>162.56</del> 113.80	14400	<del>346.00</del> 221.83
		09700	<del>162.56</del> 113.80	16400	<del>499.03</del> 342.32
		10200	<del>159.58</del> 111.71	18400	<del>630.52</del> 441.37
		10400	<del>180.29</del> 126.19	20400	<del>720.01</del> 509.60
		12200	<del>246.11</del> 151.28		
		14200	<del>285.03</del> 199.52		
		16200	<del>483.65</del> 338.55		
		18200	<del>498.56</del> 348.99		
		20200	<del>581.68</del> 407.18		



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com




Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield

SilverLine – End milling cutter

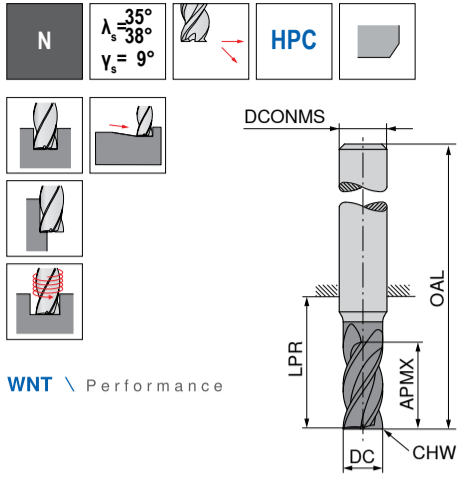

WNT \ Performance



DC <sub>16</sub>	APMX	LPR	OAL	DCONMS <sub>16</sub>	CHW	ZEFP
mm	mm	mm	mm	mm	mm	
3.0	5	14	50	6	0.1	4
3.0	8	21	57	6	0.1	4
3.5	8	18	54	6	0.1	4
3.5	11	21	57	6	0.1	4
4.0	8	18	54	6	0.1	4
4.0	11	21	57	6	0.1	4
4.5	9	18	54	6	0.1	4
4.5	13	21	57	6	0.1	4
5.0	9	18	54	6	0.1	4
5.0	13	21	57	6	0.1	4
5.5	10	18	54	6	0.1	4
5.5	13	21	57	6	0.1	4
6.0	10	18	54	6	0.1	4
6.0	13	21	57	6	0.1	4
7.0	12	22	58	8	0.2	4
7.0	21	27	63	8	0.2	4
8.0	12	22	58	8	0.2	4
8.0	21	27	63	8	0.2	4
9.0	14	26	66	10	0.2	4
9.0	22	32	72	10	0.2	4
10.0	14	26	66	10	0.2	4
10.0	22	32	72	10	0.2	4
11.0	16	28	73	12	0.3	4
11.0	26	38	83	12	0.3	4
12.0	16	28	73	12	0.3	4
12.0	26	38	83	12	0.3	4
14.0	16	28	73	14	0.3	4
14.0	26	38	83	14	0.3	4
15.0	22	34	82	16	0.3	4
15.0	36	44	92	16	0.3	4
16.0	22	34	82	16	0.3	4
16.0	36	44	92	16	0.3	4
17.0	22	34	82	18	0.3	4
17.0	36	44	92	18	0.3	4
18.0	22	34	82	18	0.3	4
18.0	36	44	92	18	0.3	4
19.0	26	42	92	20	0.3	4
19.0	41	54	104	20	0.3	4
20.0	26	42	92	20	0.3	4
20.0	41	54	104	20	0.3	4

50 972 ...	PG V0/5A		50 973 ...	PG V0/5A		50 972 ...	PG V0/5A		50 973 ...	PG V0/5A	
	£	£		£	£		£	£			
03100	<del>66.16</del>	46.31	03100	<del>66.16</del>	46.31	03200	<del>66.16</del>	46.31	03200	<del>66.16</del>	46.31
03600	<del>66.16</del>	46.31	03600	<del>66.16</del>	46.31	03700	<del>66.16</del>	46.31	03700	<del>66.16</del>	46.31
04100	<del>66.16</del>	46.31	04100	<del>66.16</del>	46.31	04200	<del>66.16</del>	46.31	04200	<del>66.16</del>	46.31
04600	<del>67.55</del>	47.28	04600	<del>67.55</del>	47.28	04700	<del>67.55</del>	47.28	04700	<del>67.55</del>	47.28
05100	<del>67.55</del>	47.28	05100	<del>67.55</del>	47.28	05200	<del>67.55</del>	47.28	05200	<del>67.55</del>	47.28
05600	<del>65.34</del>	45.74	05600	<del>65.34</del>	45.74	05700	<del>65.34</del>	45.74	05700	<del>65.34</del>	45.74
06100	<del>65.34</del>	45.74	06100	<del>65.34</del>	45.74	06200	<del>65.34</del>	45.74	06200	<del>65.34</del>	45.74
07100	<del>86.88</del>	60.81	07100	<del>86.88</del>	60.81	07200	<del>86.88</del>	60.81	07200	<del>86.88</del>	60.81
08100	<del>86.88</del>	60.81	08100	<del>86.88</del>	60.81	08200	<del>86.88</del>	60.81	08200	<del>86.88</del>	60.81
09100	<del>113.40</del>	79.38	09100	<del>113.40</del>	79.38	09200	<del>113.40</del>	79.38	09200	<del>113.40</del>	79.38
10100	<del>113.40</del>	79.38	10100	<del>113.40</del>	79.38	10200	<del>113.40</del>	79.38	10200	<del>113.40</del>	79.38
11100	<del>179.23</del>	125.46	11100	<del>179.23</del>	125.46	11200	<del>179.23</del>	125.46	11200	<del>179.23</del>	125.46
12100	<del>179.23</del>	125.46	12100	<del>179.23</del>	125.46	12200	<del>179.23</del>	125.46	12200	<del>179.23</del>	125.46
14100	<del>230.33</del>	161.23	14100	<del>230.33</del>	161.23	14200	<del>230.33</del>	161.23	14200	<del>230.33</del>	161.23
15100	<del>284.52</del>	199.16	15100	<del>284.52</del>	199.16	15200	<del>284.52</del>	199.16	15200	<del>284.52</del>	199.16
16100	<del>284.52</del>	199.16	16100	<del>284.52</del>	199.16	16200	<del>284.52</del>	199.16	16200	<del>284.52</del>	199.16
17100	<del>386.87</del>	270.81	17100	<del>386.87</del>	270.81	17200	<del>386.87</del>	270.81	17200	<del>386.87</del>	270.81
18100	<del>386.87</del>	270.81	18100	<del>386.87</del>	270.81	18200	<del>386.87</del>	270.81	18200	<del>386.87</del>	270.81
19100	<del>438.99</del>	307.29	19100	<del>438.99</del>	307.29	19200	<del>438.99</del>	307.29	19200	<del>438.99</del>	307.29
20100	<del>438.99</del>	307.29	20100	<del>438.99</del>	307.29	20200	<del>438.99</del>	307.29	20200	<del>438.99</del>	307.29

P	●	●	●	●
M	●	●	●	●
K	●	●	●	●
N	○	○	○	○
S	●	●	●	●
H				
O				

CERATIZIT worldwide

- CERATIZIT Group**
- ▲ Headquarters
- ▲ Production & Sales
- △ Production
- ▲ Sales
- CB-CERATIZIT**
- ▲ Production & Sales
- △ Production
- ▲ Sales



Customer Service Centre  
 Freephone: 0800 073 2 073  
 Email: info.uk@ceratizit.com





Ordering via the Online Shop  
<http://cuttingtools.ceratizit.com>



### SilverLine – End milling cutter

▲ Especially for high-volume milling

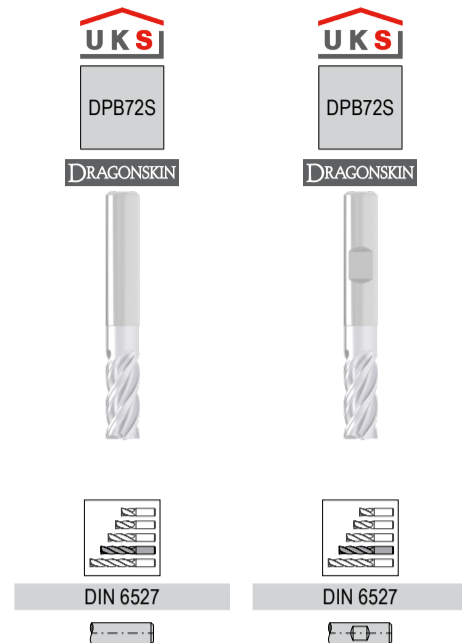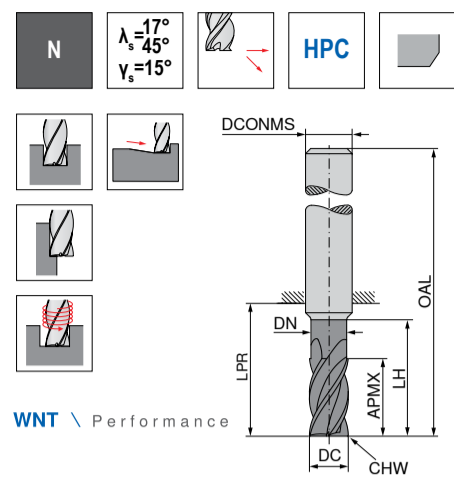


DC <sub>18</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	CHW mm	ZEFP	50 976 ... PG V0/5A		50 977 ... PG V0/5A			
									£	£	£	£		
3	8	2.8	13	21	57	6	0.1	4	03200	<del>92.41</del>	64.68	03200	<del>92.41</del>	64.68
4	11	3.8	17	21	57	6	0.1	4	04200	<del>92.41</del>	64.68	04200	<del>92.41</del>	64.68
5	13	4.8	19	21	57	6	0.1	4	05200	<del>92.41</del>	64.68	05200	<del>92.41</del>	64.68
6	13	5.8	19	21	57	6	0.1	4	06200	<del>97.08</del>	67.96	06200	<del>97.08</del>	67.96
8	21	7.7	25	27	63	8	0.2	4	08200	<del>111.30</del>	77.91	08200	<del>111.30</del>	77.91
10	22	9.7	30	32	72	10	0.2	4	10200	<del>191.19</del>	133.83	10200	<del>191.19</del>	133.83
12	26	11.6	36	38	83	12	0.3	4	12200	<del>269.06</del>	181.34	12200	<del>269.06</del>	181.34
14	26	13.6	36	38	83	14	0.3	4	14200	<del>381.50</del>	267.05	14200	<del>381.50</del>	267.05
16	36	15.5	42	44	92	16	0.3	4	16200	<del>483.84</del>	338.69	16200	<del>483.84</del>	338.69
18	36	17.5	42	44	92	18	0.3	4	18200	<del>667.92</del>	467.54	18200	<del>667.92</del>	467.54
20	41	19.5	52	54	104	20	0.3	4	20200	<del>695.29</del>	486.70	20200	<del>695.29</del>	486.70

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H	●	●
O	●	●

### SilverLine – Rough milling cutter

▲ With roughing profile

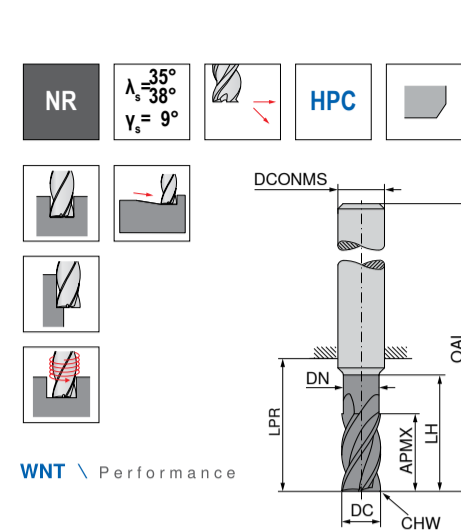

DC <sub>011</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	CHW mm	ZEFP	50 979 ... PG V0/5A		
									£	£	
3.0	8	2.8	13	21	57	6	0.1	4	03200	<del>190.50</del>	133.35
3.5	11	3.3	17	21	57	6	0.1	4	03700	<del>190.50</del>	133.35
4.0	11	3.8	17	21	57	6	0.1	4	04200	<del>190.50</del>	133.35
4.5	13	4.3	19	21	57	6	0.1	4	04700	<del>190.50</del>	133.35
5.0	13	4.8	19	21	57	6	0.1	4	05200	<del>190.50</del>	133.35
5.5	13	5.3	19	21	57	6	0.1	4	05700	<del>190.50</del>	133.35
6.0	13	5.8	19	21	57	6	0.1	4	06200	<del>190.50</del>	133.35
7.0	21	6.7	25	27	63	8	0.2	4	07200	<del>295.21</del>	143.64
8.0	21	7.7	25	27	63	8	0.2	4	08200	<del>295.21</del>	143.64
9.0	22	8.7	30	32	72	10	0.2	4	09200	<del>215.59</del>	150.91
10.0	22	9.7	30	32	72	10	0.2	4	10200	<del>215.59</del>	150.91
11.0	26	10.6	36	38	83	12	0.3	4	11200	<del>300.98</del>	210.68
12.0	26	11.6	36	38	83	12	0.3	4	12200	<del>300.98</del>	210.68
14.0	26	13.6	36	38	83	14	0.3	4	14200	<del>430.85</del>	301.59
15.0	36	14.5	42	44	92	16	0.3	4	15200	<del>430.85</del>	301.59
16.0	36	15.5	42	44	92	16	0.3	4	16200	<del>430.85</del>	301.59
17.0	36	16.5	42	44	92	18	0.3	4	17200	<del>504.28</del>	352.99
18.0	36	17.5	42	44	92	18	0.3	4	18200	<del>504.28</del>	352.99
19.0	41	18.5	52	54	104	20	0.3	4	19200	<del>678.65</del>	475.06
20.0	41	19.5	52	54	104	20	0.3	4	20200	<del>678.65</del>	475.06

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H	●	●
O	●	●



Get the most out of your solid carbide tools by using Centro-P  
→ see page 84



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com




Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

SilverLine – End milling cutter with corner radius

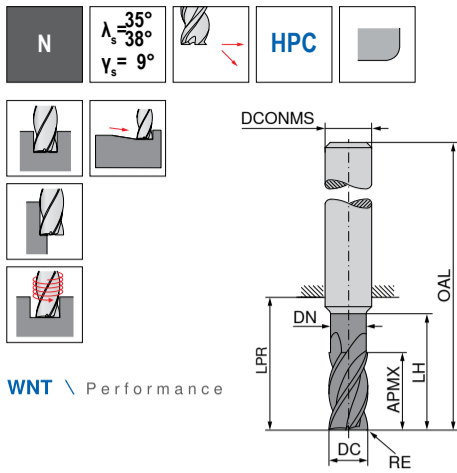

WNT \ Performance

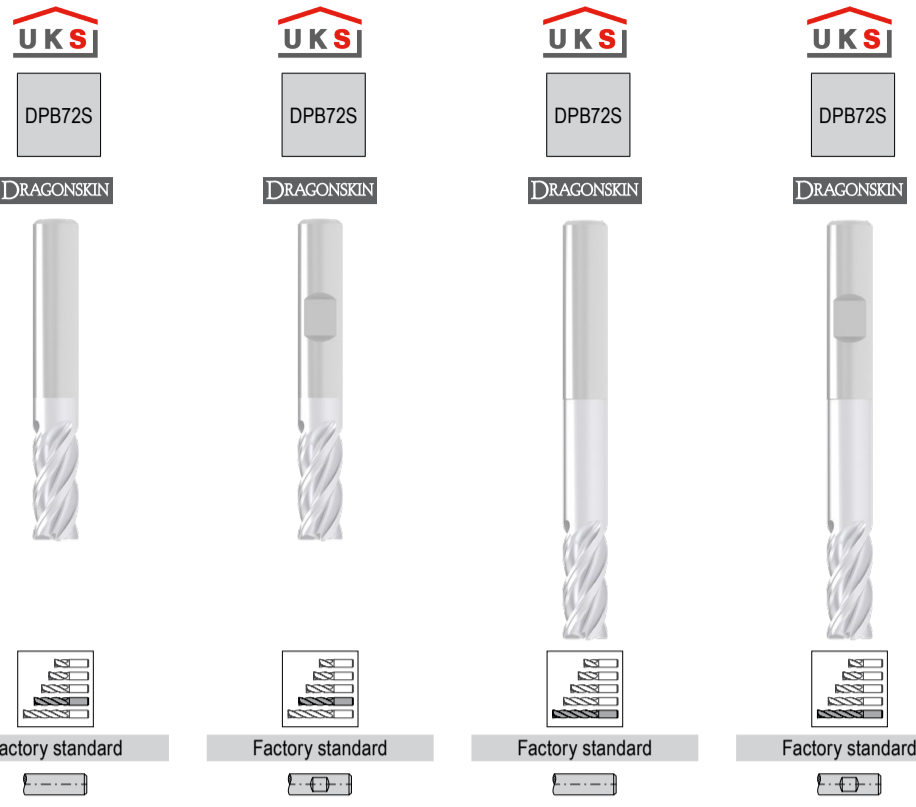

DC	RE	APMX	DN	LH	LPR	OAL	DCONMS	ZEFP	50 970 ... PG V0/5A		50 971 ... PG V0/5A		50 970 ... PG V0/5A		50 971 ... PG V0/5A	
									£	£	£	£	£	£	£	£
3	0.10	8.0	2.8	13	21	57	6	4	03201	89.18	62.43	03201	89.18	62.43		
3	0.40	8.0	2.8	13	21	57	6	4	03204	89.18	62.43	03204	89.18	62.43		
3	0.50	8.0	2.8	13	21	57	6	4	03205	89.18	62.43	03205	89.18	62.43		
3	1.00	8.0	2.8	13	21	57	6	4	03210	89.18	62.43	03210	89.18	62.43		
3	0.50	6.5	2.8	15	22	58	6	4								
3	0.30	6.5	2.8	15	22	58	6	4								
3	0.80	6.5	2.8	15	22	58	6	4								
4	0.40	11.0	3.8	17	21	57	6	4								
4	0.10	11.0	3.8	17	21	57	6	4								
4	0.50	11.0	3.8	17	21	57	6	4								
4	1.00	11.0	3.8	17	21	57	6	4								
4	0.50	8.5	3.8	20	26	62	6	4								
4	0.40	8.5	3.8	20	26	62	6	4								
4	0.80	8.5	3.8	20	26	62	6	4								
5	1.00	13.0	4.8	19	21	57	6	4								
5	0.10	13.0	4.8	19	21	57	6	4								
5	0.50	13.0	4.8	19	21	57	6	4								
5	0.80	10.5	4.8	25	34	70	6	4								
5	0.50	10.5	4.8	25	34	70	6	4								
6	1.00	13.0	5.8	19	21	57	6	4								
6	0.10	13.0	5.8	19	21	57	6	4								
6	0.50	13.0	5.8	19	21	57	6	4								
6	1.50	13.0	5.8	19	21	57	6	4								
6	0.80	13.0	5.8	30	34	70	6	4								
6	0.60	13.0	5.8	30	34	70	6	4								
8	1.00	13.0	5.8	30	34	70	6	4								
8	0.50	21.0	7.7	25	27	63	8	4								
8	0.15	21.0	7.7	25	27	63	8	4								
8	1.00	21.0	7.7	25	27	63	8	4								
8	1.50	21.0	7.7	25	27	63	8	4								
8	2.00	21.0	7.7	25	27	63	8	4								
8	1.50	17.0	7.7	40	44	80	8	4								
8	0.80	17.0	7.7	40	44	80	8	4								
8	1.00	17.0	7.7	40	44	80	8	4								
8	2.00	17.0	7.7	40	44	80	8	4								
10	0.15	22.0	9.7	30	32	72	10	4								
10	0.50	22.0	9.7	30	32	72	10	4								
10	1.00	22.0	9.7	30	32	72	10	4								
10	1.50	22.0	9.7	30	32	72	10	4								
10	2.00	22.0	9.7	30	32	72	10	4								
10	1.50	21.0	9.7	50	54	94	10	4								
10	0.50	21.0	9.7	50	54	94	10	4								
10	1.00	21.0	9.7	50	54	94	10	4								
10	2.00	21.0	9.7	50	54	94	10	4								
12	0.20	26.0	11.6	36	38	83	12	4								
12	0.50	26.0	11.6	36	38	83	12	4								
12	1.00	26.0	11.6	36	38	83	12	4								
12	1.50	26.0	11.6	36	38	83	12	4								
12	2.00	26.0	11.6	36	38	83	12	4								
12	3.00	26.0	11.6	36	38	83	12	4								
12	4.00	26.0	11.6	36	38	83	12	4								
12	2.00	25.0	11.6	60	64	109	12	4								
12	0.50	25.0	11.6	60	64	109	12	4								
12	1.00	25.0	11.6	60	64	109	12	4								
12	1.50	25.0	11.6	60	64	109	12	4								
12	3.00	25.0	11.6	60	64	109	12	4								
14	0.30	26.0	13.6	36	38	83	14	4								
14	1.00	26.0	13.6	36	38	83	14	4								
14	2.00	26.0	13.6	36	38	83	14	4								
14	3.00	26.0	13.6	36	38	83	14	4								
14	4.00	26.0	13.6	36	38	83	14	4								
14	3.00	29.0	13.6	70	74	119	14	4								
14	1.00	29.0	13.6	70	74	119	14	4								
14	2.00	29.0	13.6	70	74	119	14	4								
14	4.00	29.0	13.6	70	74	119	14	4								
16	1.00	36.0	15.5	42	44	92	16	4								
16	0.30	36.0	15.5	42	44	92	16	4								
16	2.00	36.0	15.5	42	44	92	16	4								
16	3.00	36.0	15.5	42	44	92	16	4								
16	4.00	36.0	15.5	42	44	92	16	4								
16	3.00	33.0	15.5	80	84	132	16	4								
16	1.00	33.0	15.5	80	84	132	16	4								
16	2.00	33.0	15.5	80	84	132	16	4								
16	4.00	33.0	15.5	80	84	132	16	4								
18	1.00	36.0	17.5	42	44	92	18	4								
18	2.00	36.0	17.5	42	44	92	18	4								
18	3.00	36.0	17.5	42	44	92	18	4								
18	4.00	36.0	17.5	42	44	92	18	4								
18	3.00	38.0	17.5	90	94	142	18	4								
18	1.00	38.0	17.5	90	94	142	18	4								
18	2.00	38.0	17.5	90	94	142	18	4								
18	4.00	38.0	17.5	90	94	142	18	4								
20	0.30	41.0	19.5	52	54	104	20	4								
20	1.00	41.0	19.5	52	54	104	20	4								
20	2.00	41.0	19.5	52	54	104	20	4								
20	3.00	41.0	19.5	52	54	104	20	4								
20	4.00	41.0	19.5	52	54	104	20	4								
20	3.00	42.0	19.5	100	104	154	20	4								
20	1.00	42.0	19.5	100	104	154	20	4								
20	2.00	42.0	19.5	100	104	154	20	4								
20	4.00	42.0	19.5	100	104	154	20	4								

P	•	•	•	•
M	•	•	•	•
K	•	•	•	•
N	○	○	○	○
S	•	•	•	•
H				
O				




Customer Service Centre  
 Freephone: 0800 073 2 073  
 Email: info.uk@ceratizit.com



Ordering via the Online Shop  
<http://cuttingtools.ceratizit.com>



SilverLine – End milling cutter

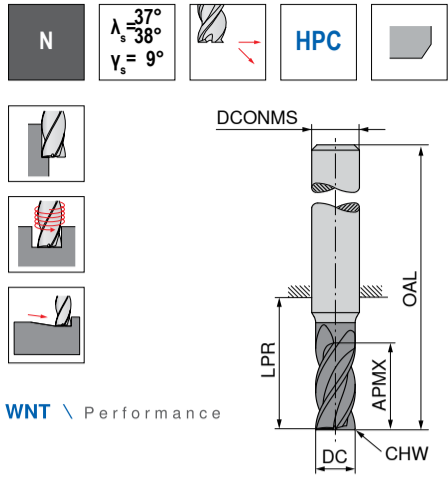


WNT \ Performance



DC <sub>es</sub>	APMX	LPR	OAL	DCONMS <sub>h6</sub>	α°	ZEFP	50 993 ...	PG V0/5A	50 995 ...	PG V0/5A
mm	mm	mm	mm	mm			£	£	£	£
6	10	18	54	6	45	5	06100	<del>54.92</del> 37.95	06100	<del>54.92</del> 37.95
8	12	22	58	8	45	5	08100	<del>72.67</del> 50.45	08100	<del>72.67</del> 50.45
10	14	26	66	10	45	5	10100	<del>94.64</del> 65.84	10100	<del>94.64</del> 65.84
12	16	28	73	12	45	5	12100	<del>148.66</del> 104.06	12100	<del>148.66</del> 104.06
16	22	34	82	16	45	5	16100	<del>235.92</del> 165.14	16100	<del>235.92</del> 165.14
20	26	42	92	20	45	5	20100	<del>369.92</del> 254.74	20100	<del>369.92</del> 254.74

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

SilverLine – End milling cutter

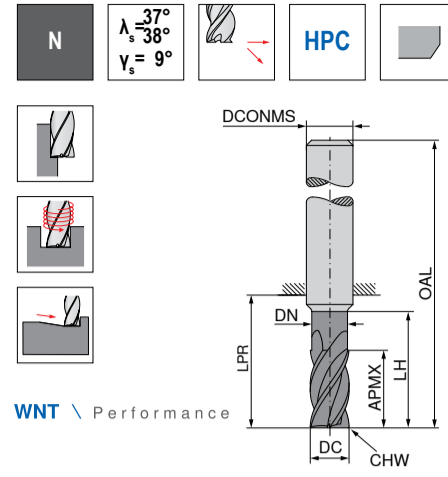


WNT \ Performance



DC <sub>es</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	α°	ZEFP	50 994 ...	PG V0/5A	50 996 ...	PG V0/5A
mm	mm	mm	mm	mm	mm	mm			£	£	£	£
6	13	5.8	19	21	57	6	45	5	06200	<del>53.76</del> 37.59	06200	<del>53.76</del> 37.59
8	21	7.7	25	27	63	8	45	5	08200	<del>73.26</del> 51.29	08200	<del>73.26</del> 51.29
10	22	9.7	30	32	72	10	45	5	10200	<del>107.24</del> 75.07	10200	<del>107.24</del> 75.07
12	26	11.6	36	38	83	12	45	5	12200	<del>138.55</del> 91.39	12200	<del>138.55</del> 91.39
16	36	15.5	42	44	92	16	45	5	16200	<del>303.92</del> 212.33	16200	<del>303.92</del> 212.33
20	41	19.5	52	54	104	20	45	5	20200	<del>444.95</del> 290.47	20200	<del>444.95</del> 290.47

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

SilverLine – End milling cutter with corner radius

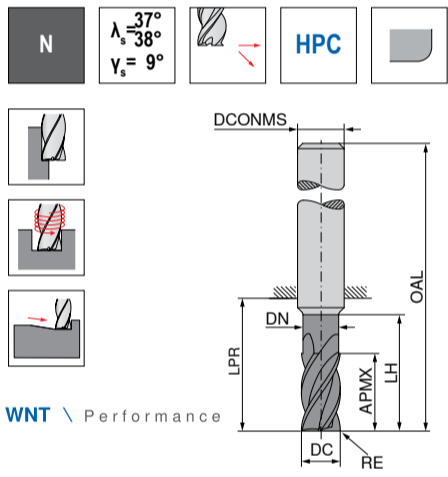

WNT \ Performance




DC <sub>es</sub>	RE <sub>±0.05</sub>	APMX	LPR	OAL	DCONMS <sub>h6</sub>	ZEFP	50 997 ...	PG V0/5A	50 998 ...	PG V0/5A
mm	mm	mm	mm	mm	mm		£	£	£	£
6	0.2	13	21	57	6	5	06202	<del>77.26</del> 54.09	06202	<del>77.26</del> 54.09
6	0.5	13	21	57	6	5	06205	<del>77.26</del> 54.09	06205	<del>77.26</del> 54.09
6	1.0	13	21	57	6	5	06210	<del>77.26</del> 54.09	06210	<del>77.26</del> 54.09
8	0.2	21	27	63	8	5	08202	<del>96.97</del> 67.88	08202	<del>96.97</del> 67.88
8	0.5	21	27	63	8	5	08205	<del>96.97</del> 67.88	08205	<del>96.97</del> 67.88
8	1.0	21	27	63	8	5	08210	<del>96.97</del> 67.88	08210	<del>96.97</del> 67.88
8	1.5	21	27	63	8	5	08215	<del>96.97</del> 67.88	08215	<del>96.97</del> 67.88
10	0.2	22	32	72	10	5	10202	<del>121.09</del> 84.76	10202	<del>121.09</del> 84.76
10	0.5	22	32	72	10	5	10205	<del>121.09</del> 84.76	10205	<del>121.09</del> 84.76
10	1.0	22	32	72	10	5	10210	<del>121.09</del> 84.76	10210	<del>121.09</del> 84.76
10	1.5	22	32	72	10	5	10215	<del>121.09</del> 84.76	10215	<del>121.09</del> 84.76
10	2.0	22	32	72	10	5	10220	<del>121.09</del> 84.76	10220	<del>121.09</del> 84.76
12	0.3	26	38	83	12	5	12203	<del>187.02</del> 130.92	12203	<del>187.02</del> 130.92
12	0.5	26	38	83	12	5	12205	<del>187.02</del> 130.92	12205	<del>187.02</del> 130.92
12	1.0	26	38	83	12	5	12210	<del>187.02</del> 130.92	12210	<del>187.02</del> 130.92
12	1.5	26	38	83	12	5	12215	<del>187.02</del> 130.92	12215	<del>187.02</del> 130.92
12	2.0	26	38	83	12	5	12220	<del>187.02</del> 130.92	12220	<del>187.02</del> 130.92
12	2.5	26	38	83	12	5	12225	<del>187.02</del> 130.92	12225	<del>187.02</del> 130.92
16	0.3	36	44	92	16	5	16203	<del>282.03</del> 198.05	16203	<del>282.03</del> 198.05
16	0.5	36	44	92	16	5	16205	<del>282.03</del> 198.05	16205	<del>282.03</del> 198.05
16	1.0	36	44	92	16	5	16210	<del>282.03</del> 198.05	16210	<del>282.03</del> 198.05
16	1.5	36	44	92	16	5	16215	<del>282.03</del> 198.05	16215	<del>282.03</del> 198.05
16	2.0	36	44	92	16	5	16220	<del>282.03</del> 198.05	16220	<del>282.03</del> 198.05
16	2.5	36	44	92	16	5	16225	<del>282.03</del> 198.05	16225	<del>282.03</del> 198.05
16	3.0	36	44	92	16	5	16230	<del>282.03</del> 198.05	16230	<del>282.03</del> 198.05
20	0.3	41	54	104	20	5	20203	<del>423.73</del> 296.62	20203	<del>423.73</del> 296.62
20	0.5	41	54	104	20	5	20205	<del>423.73</del> 296.62	20205	<del>423.73</del> 296.62
20	1.0	41	54	104	20	5	20210	<del>423.73</del> 296.62	20210	<del>423.73</del> 296.62
20	1.5	41	54	104	20	5	20215	<del>423.73</del> 296.62	20215	<del>423.73</del> 296.62
20	2.0	41	54	104	20	5	20220	<del>423.73</del> 296.62	20220	<del>423.73</del> 296.62
20	2.5	41	54	104	20	5	20225	<del>423.73</del> 296.62	20225	<del>423.73</del> 296.62
20	3.0	41	54	104	20	5	20230	<del>423.73</del> 296.62	20230	<del>423.73</del> 296.62
20	4.0	41	54	104	20	5	20240	<del>423.73</del> 296.62	20240	<del>423.73</del> 296.62

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H		
O		

SilverLine – High Accuracy Finish Milling Cutter

- ▲ max. taper of 0.008 mm for high precision and parallelism of vertical walls
- ▲ Tool with cutting edge correction

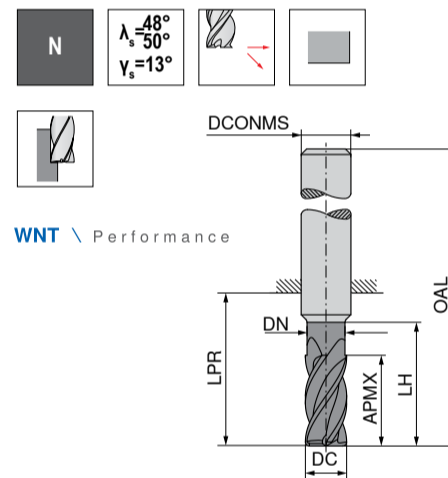


WNT \ Performance



DC <sub>es</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEFP	50 991 ...	PG V0/5A	50 991 ...	PG V0/5A
mm	mm	mm	mm	mm	mm	mm		£	£	£	£
6	13	5.6	19	21	57	6	6	06700	<del>98.46</del> 68.88	06700	<del>98.46</del> 68.88
6	10	5.8	18	22	58	6	6	06200	<del>98.46</del> 68.92	06200	<del>98.46</del> 68.92
6	13	5.8	27	31	67	6	6	06400	<del>193.58</del> 93.44	06400	<del>193.58</del> 93.44
6	13	5.8	36	40	76	6	6	06900	<del>186.76</del> 116.73	06900	<del>186.76</del> 116.73
6	15	5.6	42	44	80	6	6	90000	<del>193.44</del> 93.41	90000	<del>193.44</del> 93.41
8	19	7.6	25	27	63	8	6	08700	<del>113.02</del> 79.12	08700	<del>113.02</del> 79.12
8	13	7.7	24	28	64	8	6	08200	<del>112.02</del> 78.83	08200	<del>112.02</del> 78.83
8	17	7.7	36	40	76	8	6	08400	<del>165.14</del> 115.60	08400	<del>165.14</del> 115.60
8	17	7.7	48	53	89	8	6	08900	<del>206.42</del> 144.50	08900	<del>206.42</del> 144.50
8	20	7.6	62	64	100	8	6	90100	<del>164.02</del> 115.44	90100	<del>164.02</del> 115.44
10	22	9.6	30	32	72	10	6	10700	<del>193.69</del> 135.52	10700	<del>193.69</del> 135.52
10	16	9.7	30	34	74	10	6	10200	<del>194.13</del> 135.89	10200	<del>194.13</del> 135.89
10	21	9.7	45	49	89	10	6	10400	<del>247.47</del> 173.23	10400	<del>247.47</del> 173.23
10	25	9.6	58	60	100	10	6	10900	<del>246.78</del> 172.75	10900	<del>246.78</del> 172.75
10	21	9.7	60	64	104	10	6	90200	<del>309.26</del> 216.49	90200	<del>309.26</del> 216.49
12	26	11.5	36	38	83	12	6	12700	<del>262.35</del> 183.65	12700	<del>262.35</del> 183.65
12	19	11.6	36	40	85	12	6	12200	<del>263.05</del> 184.13	12200	<del>263.05</del> 184.13
12	25	11.6	54	58	103	12	6	12400	<del>303.05</del> 268.13	12400	<del>303.05</del> 268.13
12	30	11.5	73	75	120	12	6	12900	<del>302.54</del> 267.78	12900	<del>302.54</del> 267.78
12	25	11.6	72	76	121	12	6	90300	<del>476.04</del> 335.05	90300	<del>476.04</del> 335.05
16	32	15.0	42	44	92	16	6	16700	<del>400.26</del> 342.45	16700	<del>400.26</del> 342.45
16	25	15.5	48	52	100	16	6	16200	<del>400.36</del> 342.57	16200	<del>400.36</del> 342.57
16	33	15.5	72	76	124	16	6	16400	<del>674.15</del> 471.90	16400	<del>674.15</del> 471.90
16	33	15.5	96	100	148	16	6	16900	<del>842.05</del> 589.85	16900	<del>842.05</del> 589.85
16	40	15.0	100	102	150	16	6	90400	<del>673.46</del> 471.42	90400	<del>673.46</del> 471.42
20	38	19.0	52	54	104	20	6	20700	<del>704.04</del> 493.37	20700	<del>704.04</del> 493.37
20	32	19.5	60	64	114	20	6	20200	<del>705.16</del> 493.61	20200	<del>705.16</del> 493.61
20	42	19.5	90	94	144	20	6	20400	<del>928.39</del> 649.87	20400	<del>928.39</del> 649.87
20	50	19.0	98	100	150	20	6	20900	<del>928.03</del> 649.62	20900	<del>928.03</del> 649.62
20	42	19.5	120	124	174	20	6	90500	<del>1466.44</del> 812.29	90500	<del>1466.44</del> 812.29
25	40	24.5	75	80	136	25	6	25200	<del>883.17</del> 618.22	25200	<del>883.17</del> 618.22
25	52	24.5	113	118	174	25	6	25400	<del>1464.63</del> 813.14	25400	<del>1464.63</del> 813.14
25	52	24.5	150	154	210	25	6	25900	<		

### SilverLine – Ball Nosed Cutter

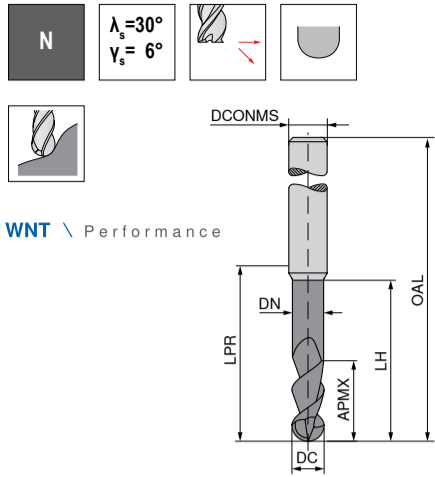


WNT \ Performance



DC <sub>ns</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>ns</sub> mm	ZEPF	50 963 ... PG V0/5A	50 963 ... PG V0/5A
3	4	2.8	10.0	14	50	6	2	03115	<del>84.02</del> 58.82
3	7	3.0	8.8	24	60	6	2	04120	<del>84.02</del> 58.82
4	8	3.8	12.0	18	54	6	2	05125	<del>84.02</del> 58.82
4	10	4.0	12.5	39	75	6	2	06130	<del>84.02</del> 58.82
5	9	4.8	16.0	18	54	6	2	07135	<del>102.20</del> 71.59
5	12	5.0	15.0	39	75	6	2	08140	<del>102.20</del> 71.59
6	10	5.7	16.0	18	54	6	2	10150	<del>127.89</del> 89.52
6	12	6.0	15.0	64	100	6	2	12160	<del>185.04</del> 130.07
7	11	6.6	20.0	22	58	8	2	14170	<del>215.77</del> 151.04
8	12	7.6	20.0	22	58	8	2	16180	<del>273.78</del> 191.64
8	14	8.0	17.5	64	100	8	2	18190	<del>451.10</del> 315.77
10	14	9.6	24.0	26	66	10	2	20110	<del>451.10</del> 315.77
10	18	10.0	22.5	60	100	10	2	20410	<del>792.43</del> 554.70
12	16	11.5	26.0	28	73	12	2		
12	22	12.0	27.5	55	100	12	2		
14	18	13.3	28.0	30	75	14	2		
14	26	14.0	32.5	75	120	14	2		
16	22	15.2	32.0	34	82	16	2		
16	30	16.0	37.5	102	150	16	2		
18	24	17.1	34.0	36	84	18	2		
20	26	19.0	40.0	42	92	20	2		
20	38	20.0	47.5	100	150	20	2		

P	●	●
M	○	○
K	●	●
N	○	○
S	○	○
H	○	○
O	○	○

### SilverLine – Ball Nosed Cutter

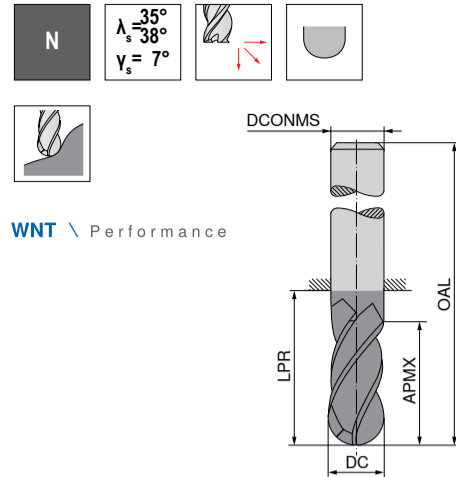

WNT \ Performance




DC <sub>ns</sub> mm	APMX mm	LPR mm	OAL mm	DCONMS <sub>ns</sub> mm	ZEPF	50 990 ... PG V0/5A	50 990 ... PG V0/5A
4	11	21	57	6	4	04220	<del>91.80</del> 57.26
5	13	21	57	6	4	05225	<del>91.80</del> 57.26
6	13	21	57	6	4	06230	<del>95.70</del> 66.99
8	19	36	72	8	4	08280	<del>118.58</del> 83.01
10	22	32	72	10	4	10250	<del>149.74</del> 104.80
12	26	38	83	12	4	12260	<del>236.04</del> 165.84
16	32	44	92	16	4	16280	<del>349.63</del> 244.74
20	38	54	104	20	4	20210	<del>506.70</del> 354.69

P	●
M	○
K	●
N	○
S	○
H	○
O	○

### SilverLine – NC deburring cutter

▲ High performance 5 flute chamfering tool

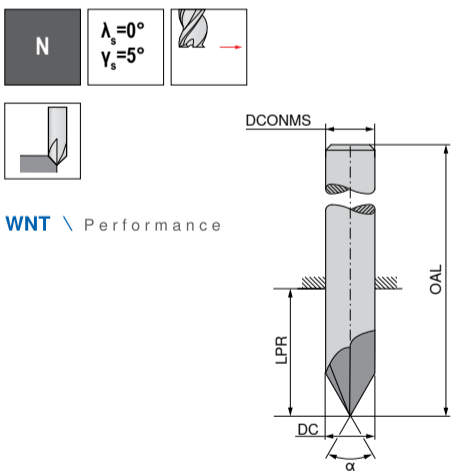

WNT \ Performance



DC <sub>ns</sub> mm	OAL mm	LPR mm	DCONMS <sub>ns</sub> mm	ZEPF
4	50	22	4	5
6	55	19	6	5
8	58	22	8	5
10	60	20	10	5
12	70	25	12	5
16	80	32	16	5

α = 60° Factory standard	α = 60° Factory standard	α = 90° Factory standard	α = 90° Factory standard
50 562 ... PG V1	50 563 ... PG V1	50 560 ... PG V1	50 561 ... PG V1
04000	04000	04000	04000
06000	06000	06000	06000
08000	08000	08000	08000
10000	10000	10000	10000
12000	12000	12000	12000
16000	16000	16000	16000

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○
O	○	○	○	○





# AluLine

With optimised coating and geometry for the effective machining of aluminium and non-ferrous metals

## First Choice for high performance Aluminium Milling

Solid carbide milling tools from CERATIZIT ensure you always do a good job: We have added milling tools for machining aluminium and non-ferrous metals to our product portfolio. This means you will now be able to find the ideal product for any application.

This AluLine milling cutter allows you to master even the toughest demands when working with aluminium and non-ferrous metals. This is all made possible thanks to the special geometry and the specifically tailored coating.

### Advantages/benefits

- ▲ **Economical and process-secure machining of aluminium and non-ferrous metals.**  
Optimal performance thanks to the perfectly coordinated combination of geometry, substrate and coating.
- ▲ **Optimal/versatile tool selection for almost all applications in the machining of non-ferrous metals**  
The product portfolio has increased in size following the program extension and now offers access to around 2500 items.
- ▲ **Extremely long tool service life possible**  
Thanks to the wear-resistant DLC coating.


Our AluLine milling cutter impresses with its outstanding coating. It achieves first-rate results even in dry machining.

Product Manager CERATIZIT, Michael Wucher


Cutting datas can be found in our main catalogue, Chapter 14 Solid Carbide milling cutters on page 414-419

## AluLine – End milling cutter

▲ With polished chip flutes

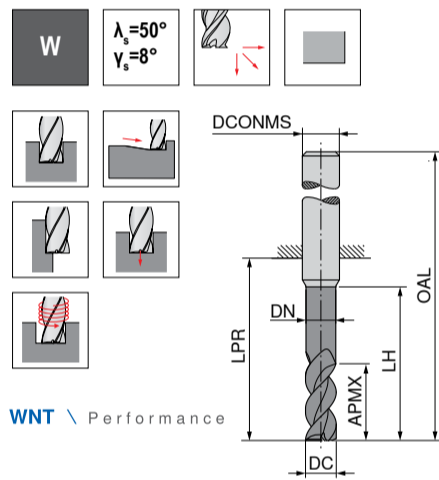

WNT \ Performance

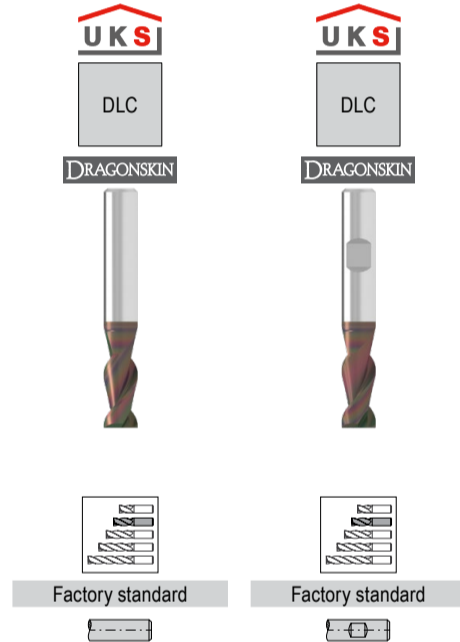


DC <sub>h6</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEFP	53 625 ...	PG V1/5B	53 626 ...	PG V1/5B		
mm	mm	mm	mm	mm	mm	mm		£	£	£	£		
5.0	10.5	4.8	15	22	58	6	2	05100	65.73	42.73	05100	65.73	42.73
5.5	13.0	5.3	18	22	58	6	2	05600	76.91	50.00	05600	76.91	50.00
6.0	13.0	5.8	18	22	58	6	2	06100	74.72	48.18	06100	74.72	48.18
6.5	17.0	6.2	24	28	64	8	2	06600	89.51	53.64	06600	89.51	53.64
7.0	17.0	6.7	24	28	64	8	2	07100	81.11	52.72	07100	81.11	52.72
7.5	17.0	7.2	24	28	64	8	2	07600	79.70	51.81	07600	79.70	51.81
8.0	17.0	7.7	24	28	64	8	2	08100	78.32	50.91	08100	78.32	50.91
8.5	21.0	8.2	30	34	74	10	2	08600	121.66	79.08	08600	121.66	79.08
9.0	21.0	8.7	30	34	74	10	2	09100	119.85	77.26	09100	119.85	77.26
9.5	21.0	9.2	30	34	74	10	2	09600	118.07	75.44	09600	118.07	75.44
10.0	21.0	9.7	30	34	74	10	2	10100	119.26	73.62	10100	119.26	73.62
10.5	25.0	10.1	36	40	85	12	2	10600	162.22	105.45	10600	162.22	105.45
11.0	25.0	10.6	36	40	85	12	2	11100	159.42	103.62	11100	159.42	103.62
11.5	25.0	11.1	36	40	85	12	2	11600	155.24	100.90	11600	155.24	100.90
12.0	25.0	11.6	36	40	85	12	2	12100	159.42	103.62	12100	159.42	103.62
12.5	29.0	12.1	42	46	91	14	2	12600	219.16	141.80	12600	219.16	141.80
13.0	29.0	12.6	42	46	91	14	2	13100	216.75	140.89	13100	216.75	140.89
13.5	29.0	13.1	42	46	91	14	2	13600	215.35	139.98	13600	215.35	139.98
14.0	29.0	13.6	42	46	91	14	2	14100	226.55	147.26	14100	226.55	147.26
14.5	33.0	14.0	48	52	100	16	2	14600	296.46	192.70	14600	296.46	192.70
15.0	33.0	14.5	48	52	100	16	2	15100	299.88	189.07	15100	299.88	189.07
15.5	33.0	15.0	48	52	100	16	2	15600	289.88	184.52	15600	289.88	184.52
16.0	33.0	15.5	48	52	100	16	2	16100	303.17	197.25	16100	303.17	197.25
16.5	38.0	16.0	54	58	106	18	2	16600	380.38	247.25	16600	380.38	247.25
17.0	38.0	16.5	54	58	106	18	2	17100	370.59	240.88	17100	370.59	240.88
17.5	38.0	17.0	54	58	106	18	2	17600	369.79	234.51	17600	369.79	234.51
18.0	38.0	17.5	54	58	106	18	2	18100	369.79	234.51	18100	369.79	234.51
18.5	42.0	18.0	60	64	114	20	2	18600	462.86	300.86	18600	462.86	300.86
19.0	42.0	18.5	60	64	114	20	2	19100	451.69	293.59	19100	451.69	293.59
19.5	42.0	19.0	60	64	114	20	2	19600	440.59	286.32	19600	440.59	286.32
20.0	42.0	19.5	60	64	114	20	2	20100	444.70	289.05	20100	444.70	289.05




## AluLine – End milling cutter

▲ With polished chip flutes

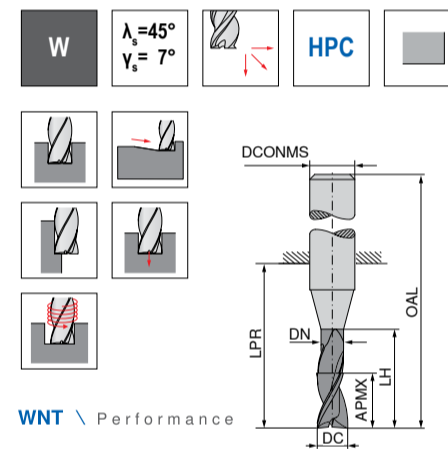

WNT \ Performance

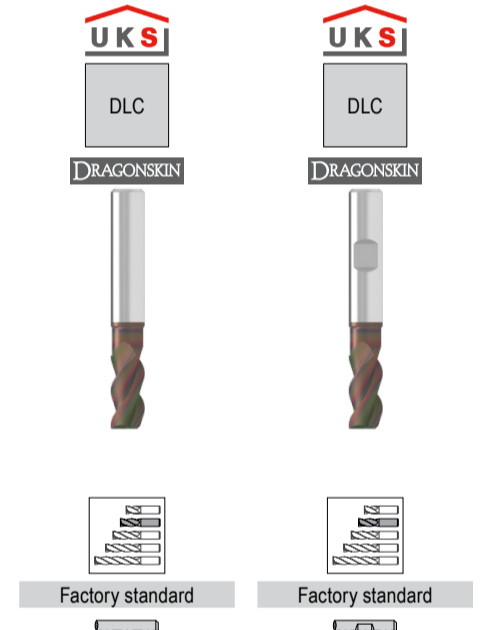

DC <sub>h6</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEFP	53 617 ...	PG V1/5B	53 618 ...	PG V1/5B		
mm	mm	mm	mm	mm	mm	mm		£	£	£	£		
2.0	4.5	1.8	6.0	14	50	6	3	02100	61.54	40.01	02100	61.54	40.01
2.5	5.5	2.3	7.5	19	55	6	3	02600	68.14	39.09	02600	68.14	39.09
3.0	6.5	2.8	9.0	19	55	6	3	03100	61.54	40.01	03100	61.54	40.01
3.5	8.5	3.3	12.0	19	55	6	3	03600	64.22	41.81	03600	64.22	41.81
4.0	8.5	3.8	12.0	19	55	6	3	04100	64.22	41.81	04100	64.22	41.81
4.5	10.5	4.3	15.0	22	58	6	3	04600	78.32	50.91	04600	78.32	50.91
5.0	10.5	4.8	15.0	22	58	6	3	05100	69.93	45.45	05100	69.93	45.45
5.5	13.0	5.3	18.0	22	58	6	3	05600	79.70	51.81	05600	79.70	51.81
6.0	13.0	5.8	18.0	22	58	6	3	06100	74.72	48.18	06100	74.72	48.18
6.5	17.0	6.2	24.0	28	64	8	3	06600	86.71	56.36	06600	86.71	56.36
7.0	17.0	6.7	24.0	28	64	8	3	07100	82.91	54.54	07100	82.91	54.54
7.5	17.0	7.2	24.0	28	64	8	3	07600	82.51	53.64	07600	82.51	53.64
8.0	17.0	7.7	24.0	28	64	8	3	08100	81.11	52.72	08100	81.11	52.72
8.5	21.0	8.2	30.0	34	74	10	3	08600	125.95	81.80	08600	125.95	81.80
9.0	21.0	8.7	30.0	34	74	10	3	09100	123.06	79.99	09100	123.06	79.99
9.5	21.0	9.2	30.0	34	74	10	3	09600	120.26	78.17	09600	120.26	78.17
10.0	21.0	9.7	30.0	34	74	10	3	10100	117.46	76.35	10100	117.46	76.35
10.5	25.0	10.1	36.0	40	85	12	3	10600	169.24	109.99	10600	169.24	109.99
11.0	25.0	10.6	36.0	40	85	12	3	11100	166.42	108.17	11100	166.42	108.17
11.5	25.0	11.1	36.0	40	85	12	3	11600	160.22	104.53	11600	160.22	104.53
12.0	25.0	11.6	36.0	40	85	12	3	12100	166.42	108.17	12100	166.42	108.17
12.5	29.0	12.1	42.0	46	91	14	3	12600	218.16	141.80	12600	218.16	141.80
13.0	29.0	12.6	42.0	46	91	14	3	13100	216.75	140.89	13100	216.75	140.89
13.5	29.0	13.1	42.0	46	91	14	3	13600	215.35	139.98	13600	215.35	139.98
14.0	29.0	13.6	42.0	46	91	14	3	14100	226.55	147.26	14100	226.55	147.26
14.5	33.0	14.0	48.0	52	100	16	3	14600	296.46	192.70	14600	296.46	192.70
15.0	33.0	14.5	48.0	52	100	16	3	15100	299.88	189.07	15100	299.88	189.07
15.5	33.0	15.0	48.0	52	100	16	3	15600	289.88	184.52	15600	289.88	184.52
16.0	33.0	15.5	48.0	52	100	16	3	16100	303.17	197.25	16100	303.17	197.25
16.5	38.0	16.0	54.0	58	106	18	3	16600	380.38	247.25	16600	380.38	247.25
17.0	38.0	16.5	54.0	58	106	18	3	17100	370.59	240.88	17100	370.59	240.88
17.5	38.0	17.0	54.0	58	106	18	3	17600	369.79	234.51	17600	369.79	234.51
18.0	38.0	17.5	54.0	58	106	18	3	18100	369.79	234.51	18100	369.79	234.51
18.5	42.0	18.0	60.0	64	114	20	3	18600	462.86	300.86	18600	462.86	300.86
19.0	42.0	18.5	60.0	64	114	20	3	19100	451.69	293.59	19100	451.69	293.59
19.5	42.0	19.0	60.0	64	114	20	3	19600	440.59	286.32	19600	440.59	286.32
20.0	42.0	19.5	60.0	64	114	20	3	20100	444.70	289.05	20100	444.70	289.05



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com




Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

### AluLine – End milling cutter

▲ With polished chip flutes

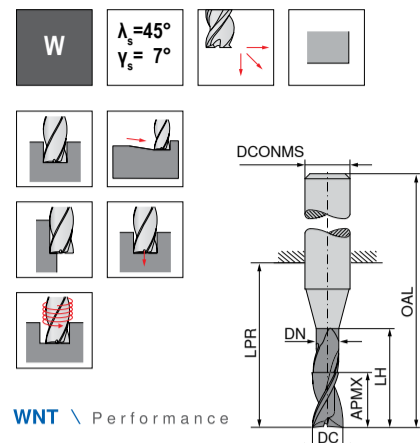

WNT \ Performance

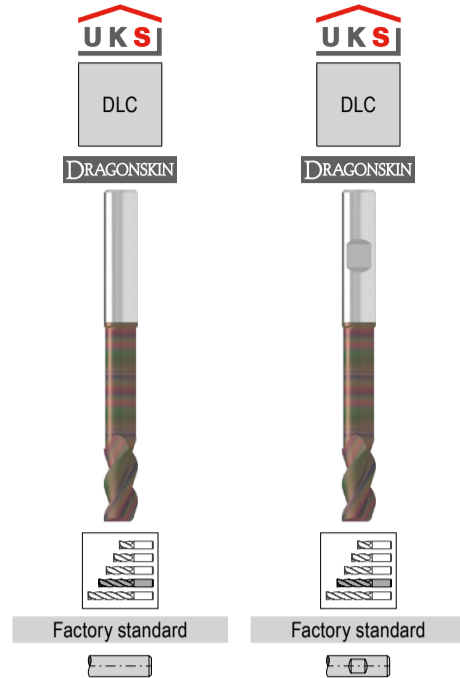


DC <sub>h6</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEPF	53 617 ... PG V1/5B	53 618 ... PG V1/5B
mm	mm	mm	mm	mm	mm	mm		£	£
2.0	5.5	1.8	10.0	19	55	6	3	02200	69.93 45.45
2.5	6.5	2.3	12.5	22	58	6	3	02700	69.93 45.45
3.0	8.0	2.8	15.0	22	58	6	3	03200	74.32 46.36
3.5	10.5	3.3	20.0	26	62	6	3	03700	74.32 48.18
4.0	10.5	3.8	20.0	26	62	6	3	04200	75.54 49.08
4.5	13.0	4.3	25.0	34	70	6	3	04700	86.98 59.08
5.0	13.0	4.8	25.0	34	70	6	3	05200	82.54 53.64
5.5	16.0	5.3	30.0	34	70	6	3	05700	93.78 60.90
6.0	16.0	5.8	30.0	34	70	6	3	06200	85.38 55.45
6.5	21.0	6.2	40.0	44	80	8	3	06700	100.69 65.45
7.0	21.0	6.7	40.0	44	80	8	3	07200	97.89 63.63
7.5	21.0	7.2	40.0	44	80	8	3	07700	96.49 62.72
8.0	21.0	7.7	40.0	44	80	8	3	08200	93.78 60.90
8.5	26.0	8.2	50.0	54	94	10	3	08700	148.22 96.35
9.0	26.0	8.7	50.0	54	94	10	3	09200	144.05 93.63
9.5	26.0	9.2	50.0	54	94	10	3	09700	144.25 91.81
10.0	26.0	9.7	50.0	54	94	10	3	10200	137.84 89.08
10.5	31.0	10.1	60.0	64	109	12	3	10700	199.87 129.98
11.0	31.0	10.6	60.0	64	109	12	3	11200	194.38 126.35
11.5	31.0	11.1	60.0	64	109	12	3	11700	198.18 123.62
12.0	31.0	11.6	60.0	64	109	12	3	12200	194.38 126.35
12.5	36.0	12.1	70.0	74	119	14	3	12700	265.91 166.34
13.0	36.0	12.6	70.0	74	119	14	3	13200	254.68 165.43
13.5	36.0	13.1	70.0	74	119	14	3	13700	263.12 164.54
14.0	36.0	13.6	70.0	74	119	14	3	14200	264.34 171.79
14.5	41.0	14.0	80.0	84	132	16	3	14700	348.24 226.33
15.0	41.0	14.5	80.0	84	132	16	3	15200	341.22 221.79
15.5	41.0	15.0	80.0	84	132	16	3	15700	334.22 217.25
16.0	41.0	15.5	80.0	84	132	16	3	16200	365.28 230.88
16.5	47.0	16.0	90.0	94	142	18	3	16700	447.51 290.89
17.0	47.0	16.5	90.0	94	142	18	3	17200	436.31 283.60
17.5	47.0	17.0	90.0	94	142	18	3	17700	425.13 276.34
18.0	47.0	17.5	90.0	94	142	18	3	18200	423.74 275.41
18.5	52.0	18.0	100.0	104	154	20	3	18700	588.74 382.69
19.0	52.0	18.5	100.0	104	154	20	3	19200	573.35 372.68
19.5	52.0	19.0	100.0	104	154	20	3	19700	557.96 362.68
20.0	52.0	19.5	100.0	104	154	20	3	20200	568.76 364.50




### AluLine – NC deburring cutter

▲ Point angle α = 90°

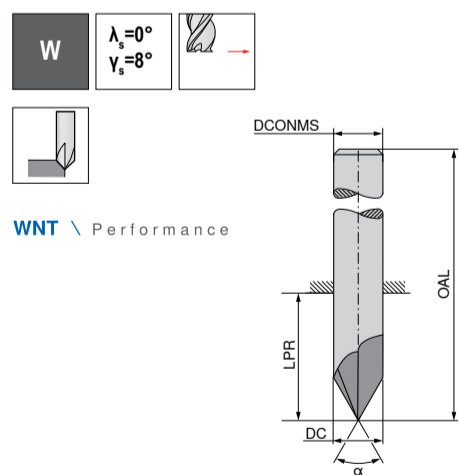


WNT \ Performance

DC <sub>h6</sub>	OAL	LPR	DCONMS <sub>h6</sub>	ZEPF
mm	mm	mm	mm	
4	50	22	4	4
6	55	19	6	4
8	58	22	8	4
10	60	20	10	4
12	70	25	12	4
16	80	32	16	4

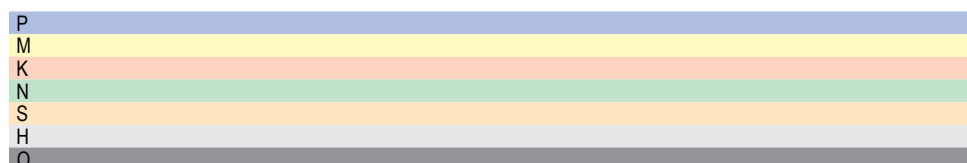

### AluLine – End milling cutter with corner radius

▲ With polished chip flutes

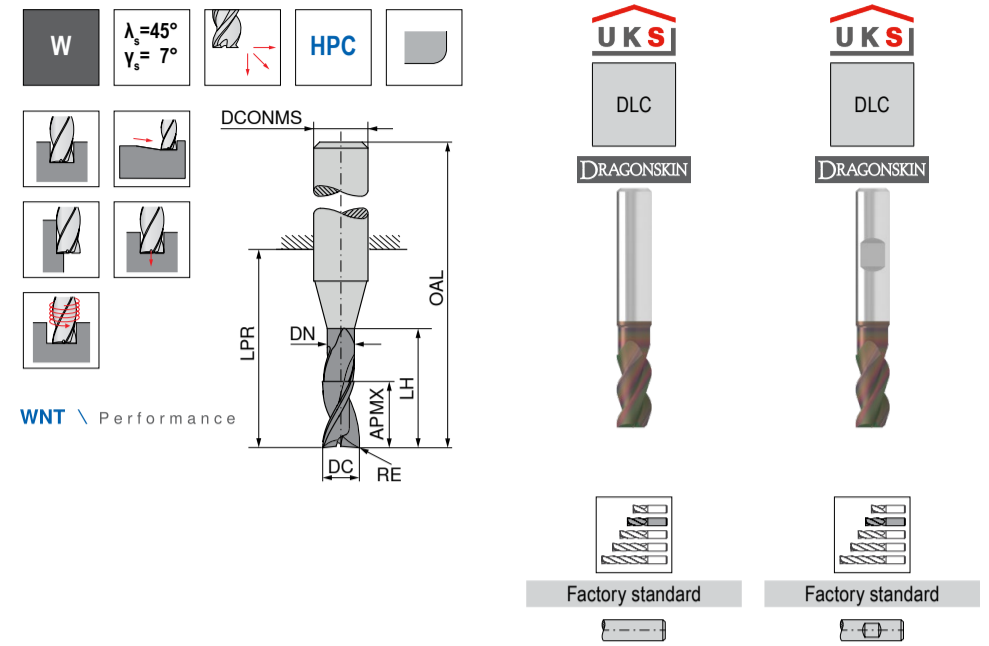


WNT \ Performance

DC <sub>h6</sub>	RE <sub>±0.05</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEPF	53 710 ... PG V1/5B	53 711 ... PG V1/5B
mm	mm	mm	mm	mm	mm	mm	mm		£	£
2	0.3	4.5	1.8	6	14	50	6	3	02103	62.92 40.90
2	0.5	4.5	1.8	6	14	50	6	3	02105	62.92 40.90
3	0.3	6.5	2.7	9	19	55	6	3	03103	64.32 41.81
3	0.5	6.5	2.7	9	19	55	6	3	03105	64.32 41.81
3	1.0	6.5	2.7	9	19	55	6	3	03110	64.32 41.81
4	0.3	8.5	3.7	12	19	55	6	3	04103	68.52 44.54
4	0.5	8.5	3.7	12	19	55	6	3	04105	68.52 44.54
4	1.0	8.5	3.7	12	19	55	6	3	04110	68.52 44.54
5	0.3	10.5	4.7	15	22	58	6	3	05103	74.12 49.08
5	0.5	10.5	4.7	15	22	58	6	3	05105	74.12 49.08
5	1.0	10.5	4.7	15	22	58	6	3	05110	74.12 49.08
6	0.3	13.0	5.7	18	22	58	6	3	06103	78.32 50.91
6	0.5	13.0	5.7	18	22	58	6	3	06105	78.32 50.91
6	1.0	13.0	5.7	18	22	58	6	3	06110	78.32 50.91
6	1.5	13.0	5.7	18	22	58	6	3	06115	78.32 50.91
8	0.3	17.0	7.4	24	28	64	8	3	08103	95.38 55.45
8	0.5	17.0	7.4	24	28	64	8	3	08105	95.38 55.45
8	1.0	17.0	7.4	24	28	64	8	3	08110	95.38 55.45
8	1.5	17.0	7.4	24	28	64	8	3	08115	95.38 55.45
8	2.0	17.0	7.4	24	28	64	8	3	08120	95.38 55.45
10	0.3	21.0	9.2	30	34	74	10	3	10103	124.46 80.90
10	0.5	21.0	9.2	30	34	74	10	3	10105	124.46 80.90
10	1.0	21.0	9.2	30	34	74	10	3	10110	124.46 80.90
10	1.5	21.0	9.2	30	34	74	10	3	10115	124.46 80.90
10	2.0	21.0	9.2	30	34	74	10	3	10120	124.46 80.90
10	3.0	21.0	9.2	30	34	74	10	3	10130	124.46 80.90
12	0.3	25.0	11.0	36	40	85	12	3	12103	176.19 114.52
12	0.5	25.0	11.0	36	40	85	12	3	12105	176.19 114.52
12	1.0	25.0	11.0	36	40	85	12	3	12110	176.19 114.52
12	1.5	25.0	11.0	36	40	85	12	3	12115	176.19 114.52
12	2.0	25.0	11.0	36	40	85	12	3	12120	176.19 114.52
12	3.0	25.0	11.0	36	40	85	12	3	12130	176.19 114.52
12	4.0	25.0	11.0	36	40	85	12	3	12140	176.19 114.52
16	0.3	33.0	15.0	48	52	100	16	3	16103	291.09 182.70
16	0.5	33.0	15.0	48	52	100	16	3	16105	291.09 182.70
16	1.0	33.0	15.0	48	52	100	16	3	16110	291.09 182.70
16	1.5	33.0	15.0	48	52	100	16	3	16115	291.09 182.70
16	2.0	33.0	15.0	48	52	100	16	3	16120	291.09 182.70
16	3.0	33.0	15.0	48	52	100	16	3	16130	291.09 182.70
16	4.0	33.0	15.0	48	52	100	16	3	16140	291.09 182.70
20	0.5	42.0	19.0	60	64	114	20	3	20105	434.98 282.68
20	1.0	42.0	19.0	60	64	114	20	3	20110	434.98 282.68
20	1.5	42.0	19.0	60	64	114	20	3	20115	434.98 282.68
20	2.0	42.0	19.0	60	64	114	20	3	20120	434.98 282.68
20	3.0	42.0	19.0	60	64	114	20	3	20130	434.98 282.68
20	4.0	42.0	19.0	60	64	114	20	3	20140	434.98 282.68



# CircularLine

Universal tool with 5 or 6 flutes for smooth operation and high material removal rate

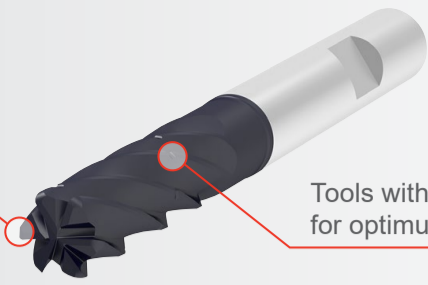



DRAGONSKIN

Tools with chip breakers for optimum chip removal



## CircularLine – End milling cutter with corner radius


- ▲ Chip breaker 0.9 x DC
- ▲ Cutting depth: 5 x DC

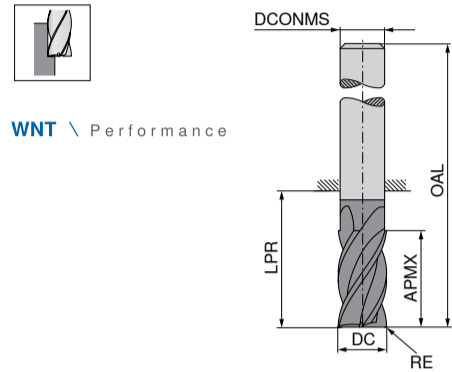

WNT \ Performance

DPX72S

DRAGONSKIN





Factory standard

DC <sub>es</sub>	RE <sub>±0.05</sub>	APMX	LPR	OAL	DCONMS <sub>h6</sub>	ZEFP	53 593 ...	PG V1/5B
mm	mm	mm	mm	mm	mm		£	£
6	0.2	31	39	75	6	5	06402	<del>106.14</del> 68.99
6	1.0	31	39	75	6	5	06410	<del>106.14</del> 68.99
6	1.5	31	39	75	6	5	06415	<del>106.14</del> 68.99
8	0.2	41	49	85	8	5	08402	<del>122.36</del> 79.54
8	1.0	41	49	85	8	5	08410	<del>122.36</del> 79.54
8	1.5	41	49	85	8	5	08415	<del>122.36</del> 79.54
8	2.0	41	49	85	8	5	08420	<del>122.36</del> 79.54
10	0.2	51	60	100	10	5	10402	<del>168.04</del> 109.81
10	1.0	51	60	100	10	5	10410	<del>168.04</del> 109.81
10	1.5	51	60	100	10	5	10415	<del>168.04</del> 109.81
10	1.6	51	60	100	10	5	10416	<del>168.04</del> 109.81
10	2.0	51	60	100	10	5	10420	<del>168.04</del> 109.81
12	0.2	61	70	115	12	5	12402	<del>209.41</del> 136.12
12	1.0	61	70	115	12	5	12410	<del>209.41</del> 136.12
12	1.5	61	70	115	12	5	12415	<del>209.41</del> 136.12
12	1.6	61	70	115	12	5	12416	<del>209.41</del> 136.12
12	2.0	61	70	115	12	5	12420	<del>209.41</del> 136.12
12	3.0	61	70	115	12	5	12430	<del>209.41</del> 136.12
14	0.2	71	81	126	14	5	14402	<del>209.41</del> 136.12
14	1.0	71	81	126	14	5	14410	<del>430.15</del> 279.60
14	1.5	71	81	126	14	5	14415	<del>430.15</del> 279.60
14	1.6	71	81	126	14	5	14416	<del>430.15</del> 279.60
14	2.0	71	81	126	14	5	14420	<del>430.15</del> 279.60
14	3.0	71	81	126	14	5	14430	<del>430.15</del> 279.60
16	0.2	81	92	140	16	5	16402	<del>425.56</del> 276.61
16	1.0	81	92	140	16	5	16410	<del>425.56</del> 276.61
16	1.5	81	92	140	16	5	16415	<del>425.56</del> 276.61
16	1.6	81	92	140	16	5	16416	<del>425.56</del> 276.61
16	2.0	81	92	140	16	5	16420	<del>425.56</del> 276.61
16	3.0	81	92	140	16	5	16430	<del>425.56</del> 276.61
16	4.0	81	92	140	16	5	16440	<del>425.56</del> 276.61
18	0.2	91	102	150	18	5	18402	<del>486.68</del> 316.35
18	1.0	91	102	150	18	5	18410	<del>486.68</del> 316.35
18	1.5	91	102	150	18	5	18415	<del>486.68</del> 316.35
18	1.6	91	102	150	18	5	18416	<del>486.68</del> 316.35
18	2.0	91	102	150	18	5	18420	<del>486.68</del> 316.35
18	3.0	91	102	150	18	5	18430	<del>486.68</del> 316.35
18	4.0	91	102	150	18	5	18440	<del>486.68</del> 316.35
20	0.2	102	113	163	20	5	20402	<del>587.66</del> 381.98
20	1.0	102	113	163	20	5	20410	<del>587.66</del> 381.98
20	1.5	102	113	163	20	5	20415	<del>587.66</del> 381.98
20	1.6	102	113	163	20	5	20416	<del>587.66</del> 381.98
20	2.0	102	113	163	20	5	20420	<del>587.66</del> 381.98
20	3.0	102	113	163	20	5	20430	<del>587.66</del> 381.98
20	4.0	102	113	163	20	5	20440	<del>587.66</del> 381.98

P	●
M	○
K	●
N	○
S	○
H	
O	

## CircularLine – End milling cutter with corner radius


- ▲ Chip breaker 0.9 x DC
- ▲ Cutting depth: 3 x DC

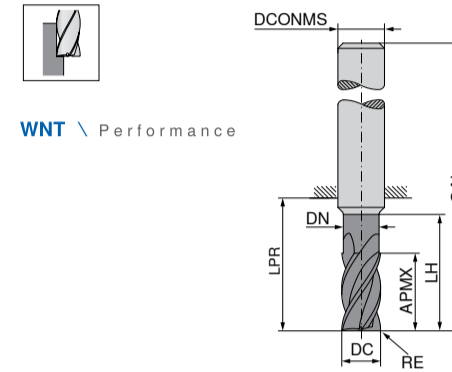

WNT \ Performance

UKS

DPX72S




Factory standard

DC <sub>es</sub>	RE <sub>±0.05</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEFP	53 642 ...	PG V1/5B
mm	mm	mm	mm	mm	mm	mm	mm		£	£
6	0.2	19	5.8	25	27	63	6	6	06202	<del>70.07</del> 45.55
6	1.0	19	5.8	25	27	63	6	6	06210	<del>71.56</del> 46.51
6	1.5	19	5.8	25	27	63	6	6	06215	<del>71.56</del> 46.51
8	0.2	25	7.7	33	35	71	8	6	08202	<del>90.04</del> 59.11
8	1.0	25	7.7	33	35	71	8	6	08210	<del>93.04</del> 61.06
8	1.5	25	7.7	33	35	71	8	6	08215	<del>93.04</del> 61.06
8	2.0	25	7.7	33	35	71	8	6	08220	<del>93.04</del> 61.06
10	0.2	31	9.7	41	43	83	10	6	10202	<del>108.04</del> 83.33
10	1.0	31	9.7	41	43	83	10	6	10210	<del>131.18</del> 85.26
10	1.5	31	9.7	41	43	83	10	6	10215	<del>131.18</del> 85.26
10	1.6	31	9.7	41	43	83	10	6	10216	<del>131.18</del> 85.26
10	2.0	31	9.7	41	43	83	10	6	10220	<del>131.18</del> 85.26
12	0.2	37	11.6	47	49	94	12	6	12202	<del>150.57</del> 97.87
12	1.0	37	11.6	47	49	94	12	6	12210	<del>155.04</del> 100.78
12	1.5	37	11.6	47	49	94	12	6	12215	<del>155.04</del> 100.78
12	1.6	37	11.6	47	49	94	12	6	12216	<del>155.04</del> 100.78
12	2.0	37	11.6	47	49	94	12	6	12220	<del>155.04</del> 100.78
12	3.0	37	11.6	47	49	94	12	6	12230	<del>155.04</del> 100.78
16	0.2	49	15.5	61	63	111	16	6	16202	<del>311.59</del> 202.54
16	1.0	49	15.5	61	63	111	16	6	16210	<del>314.56</del> 204.47
16	1.5	49	15.5	61	63	111	16	6	16215	<del>314.56</del> 204.47
16	1.6	49	15.5	61	63	111	16	6	16216	<del>314.56</del> 204.47
16	2.0	49	15.5	61	63	111	16	6	16220	<del>314.56</del> 204.47
16	3.0	49	15.5	61	63	111	16	6	16230	<del>314.56</del> 204.47
16	4.0	49	15.5	61	63	111	16	6	16240	<del>314.56</del> 204.47
20	0.2	61	19.5	75	77	127	20	6	20202	<del>436.04</del> 283.94
20	1.0	61	19.5	75	77	127	20	6	20210	<del>441.26</del> 286.82
20	1.5	61	19.5	75	77	127	20	6	20215	<del>441.26</del> 286.82
20	1.6	61	19.5	75	77	127	20	6	20216	<del>441.26</del> 286.82
20	2.0	61	19.5	75	77	127	20	6	20220	<del>441.26</del> 286.82
20	3.0	61	19.5	75	77	127	20	6	20230	<del>441.26</del> 286.82
20	4.0	61	19.5	75	77	127	20	6	20240	<del>441.26</del> 286.82

P	●
M	○
K	●
N	○
S	○
H	
O	

## Trochoidal milling

When programming the various CAM systems different information is required.

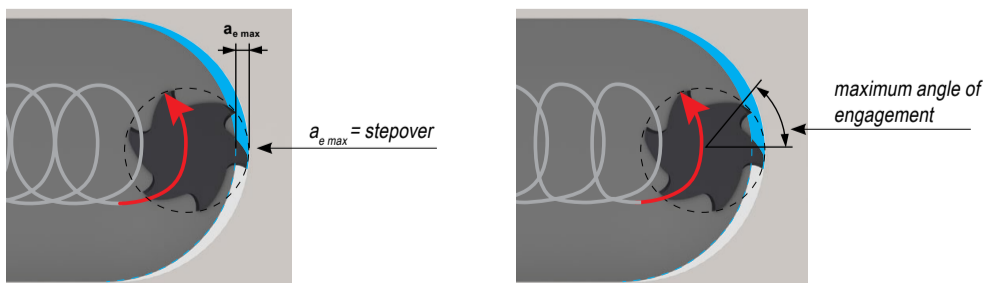

### Features & benefits of trochoidal milling

- ▲ reduced tool wear
- ▲ higher material removal rate than HPC machining possible
- ▲ spindle and machine-friendly
- ▲ suitable for low-power machines
- ▲ suitable for thin-walled components and unstable workpiece clamping

### Calculation of the average chip thickness

$$h_m \approx f_z \sqrt{\frac{a_e}{DC}}$$

$$f_z \approx h_m \sqrt{\frac{DC}{a_e}}$$

- $a_{e \max}$  = maximum lateral infeed (depending on the material to be machined)
- $f_z$  = maximum feed per tooth
- $h_m$  = average chip thickness
- DC = tool diameter



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com





Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

### CircularLine – End milling cutter with corner radius

▲ Chip breaker 0.9 x DC  
▲ Cutting depth: 2 x DC

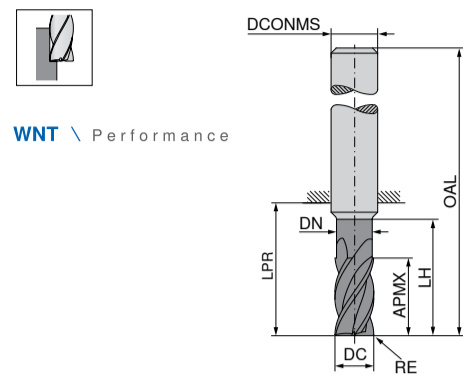

WNT \ Performance



Factory standard



DC <sub>es</sub>	OAL	RE <sub>±0.05</sub>	APMX	DN	LH	LPR	DCONMS <sub>h6</sub>	ZEFP
mm	mm	mm	mm	mm	mm	mm	mm	
6	57	1.0	13	5.8	19	21	6	6
6	57	0.2	13	5.8	19	21	6	6
6	57	1.5	13	5.8	19	21	6	6
8	63	1.5	21	7.7	25	27	8	6
8	63	0.2	21	7.7	25	27	8	6
8	63	1.0	21	7.7	25	27	8	6
8	63	2.0	21	7.7	25	27	8	6
10	72	1.5	22	9.7	30	32	10	6
10	72	0.2	22	9.7	30	32	10	6
10	72	1.0	22	9.7	30	32	10	6
10	72	1.6	22	9.7	30	32	10	6
10	72	2.0	22	9.7	30	32	10	6
12	83	1.5	26	11.6	36	38	12	6
12	83	0.2	26	11.6	36	38	12	6
12	83	1.0	26	11.6	36	38	12	6
12	83	1.6	26	11.6	36	38	12	6
12	83	2.0	26	11.6	36	38	12	6
12	83	3.0	26	11.6	36	38	12	6
16	92	4.0	36	15.5	42	44	16	6
16	92	0.2	36	15.5	42	44	16	6
16	92	1.0	36	15.5	42	44	16	6
16	92	1.5	36	15.5	42	44	16	6
16	92	1.6	36	15.5	42	44	16	6
16	92	2.0	36	15.5	42	44	16	6
16	92	3.0	36	15.5	42	44	16	6
20	104	1.6	41	19.5	52	54	20	6
20	104	0.2	41	19.5	52	54	20	6
20	104	1.0	41	19.5	52	54	20	6
20	104	1.5	41	19.5	52	54	20	6
20	104	2.0	41	19.5	52	54	20	6
20	104	3.0	41	19.5	52	54	20	6
20	104	4.0	41	19.5	52	54	20	6

	●	○
P	●	
M		○
K	●	
N		
S		○
H		
O		

53 586 ...	PG V1/5B	£	£
06010		<del>71.89</del>	46.72
06002		<del>71.49</del>	46.47
06015		<del>71.89</del>	46.72
08015		<del>85.45</del>	62.04
08002		<del>85.45</del>	62.04
08010		<del>85.45</del>	62.04
08020		<del>85.45</del>	62.04
10015		<del>123.07</del>	80.00
10002		<del>123.07</del>	80.00
10010		<del>123.07</del>	80.00
10016		<del>123.07</del>	80.00
10020		<del>123.07</del>	80.00
12015		<del>154.78</del>	100.59
12002		<del>154.78</del>	100.13
12010		<del>154.78</del>	100.59
12016		<del>154.78</del>	100.59
12020		<del>154.78</del>	100.59
12030		<del>154.78</del>	100.59
16040		<del>220.20</del>	208.13
16002		<del>220.20</del>	199.72
16010		<del>220.20</del>	215.35
16015		<del>220.20</del>	208.13
16016		<del>220.20</del>	208.13
16020		<del>220.20</del>	208.13
16030		<del>220.20</del>	208.13
20016		<del>287.15</del>	290.06
20002		<del>287.15</del>	287.15
20010		<del>287.15</del>	290.06
20015		<del>287.15</del>	290.06
20020		<del>287.15</del>	290.06
20030		<del>287.15</del>	290.06
20040		<del>287.15</del>	290.06

### CircularLine – End milling cutter with corner radius

▲ Chip breaker 0.9 x DC  
▲ Cutting depth: 4 x DC

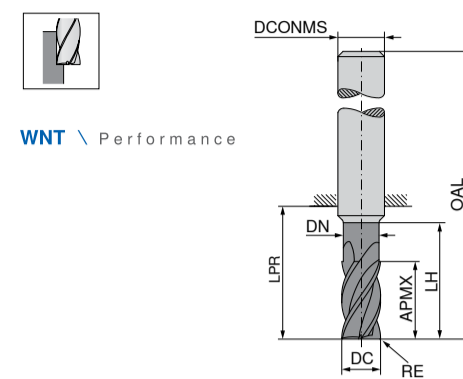

WNT \ Performance




Factory standard

DC <sub>es</sub>	OAL	RE <sub>±0.05</sub>	APMX	DN	LH	LPR	DCONMS <sub>h6</sub>	ZEFP
mm	mm	mm	mm	mm	mm	mm	mm	
6	67	1.5	25	5.8	29	31	6	5
6	67	1.0	25	5.8	29	31	6	5
6	67	0.2	25	5.8	29	31	6	5
8	76	1.5	33	7.7	38	40	8	5
8	76	1.0	33	7.7	38	40	8	5
8	76	2.0	33	7.7	38	40	8	5
8	76	0.2	33	7.7	38	40	8	5
10	89	1.5	41	9.7	47	49	10	5
10	89	1.0	41	9.7	47	49	10	5
10	89	1.6	41	9.7	47	49	10	5
10	89	2.0	41	9.7	47	49	10	5
10	89	0.2	41	9.7	47	49	10	5
12	102	1.0	49	11.6	55	57	12	5
12	102	1.5	49	11.6	55	57	12	5
12	102	1.6	49	11.6	55	57	12	5
12	102	2.0	49	11.6	55	57	12	5
12	102	3.0	49	11.6	55	57	12	5
12	102	0.2	49	11.6	55	57	12	5
16	123	1.6	65	15.5	73	75	16	5
16	123	1.0	65	15.5	73	75	16	5
16	123	1.5	65	15.5	73	75	16	5
16	123	2.0	65	15.5	73	75	16	5
16	123	3.0	65	15.5	73	75	16	5
16	123	4.0	65	15.5	73	75	16	5
16	123	0.2	65	15.5	73	75	16	5
20	143	2.0	82	19.5	91	93	20	5
20	143	1.0	82	19.5	91	93	20	5
20	143	1.5	82	19.5	91	93	20	5
20	143	1.6	82	19.5	91	93	20	5
20	143	3.0	82	19.5	91	93	20	5
20	143	4.0	82	19.5	91	93	20	5
20	143	0.2	82	19.5	91	93	20	5


	●	○
P	●	
M		○
K	●	
N		
S		○
H		
O		

### CircularLine – End milling cutter

▲ Chip breaker 0.9 x DC  
▲ Cutting depth: 4 x DC

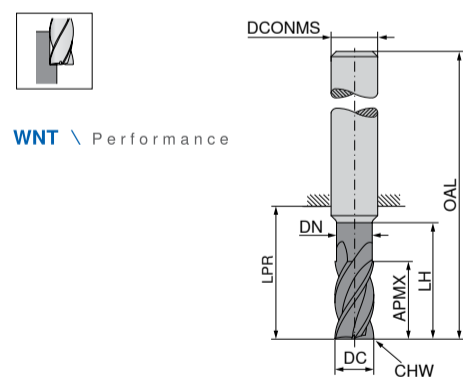

WNT \ Performance




Factory standard

DC <sub>es</sub>	OAL	APMX	DN	LH	LPR	DCONMS <sub>h6</sub>	CHW	ZEFP
mm	mm	mm	mm	mm	mm	mm	mm	
6	67	25	5.8	29	31	6	0.2	5
8	76	33	7.7	38	40	8	0.2	5
10	89	41	9.7	47	49	10	0.2	5
12	102	49	11.6	55	57	12	0.2	5
16	123	65	15.5	73	75	16	0.2	5
20	143	82	19.5	91	93	20	0.2	5


	●	○
P	●	
M		○
K	●	
N		
S		○
H		
O		

53 589 ...	PG V1/5B	£	£
060		<del>73.05</del>	47.49
080		<del>93.94</del>	61.06
100		<del>126.71</del>	84.31
120		<del>158.09</del>	102.72
160		<del>217.55</del>	206.41
200		<del>247.25</del>	290.71




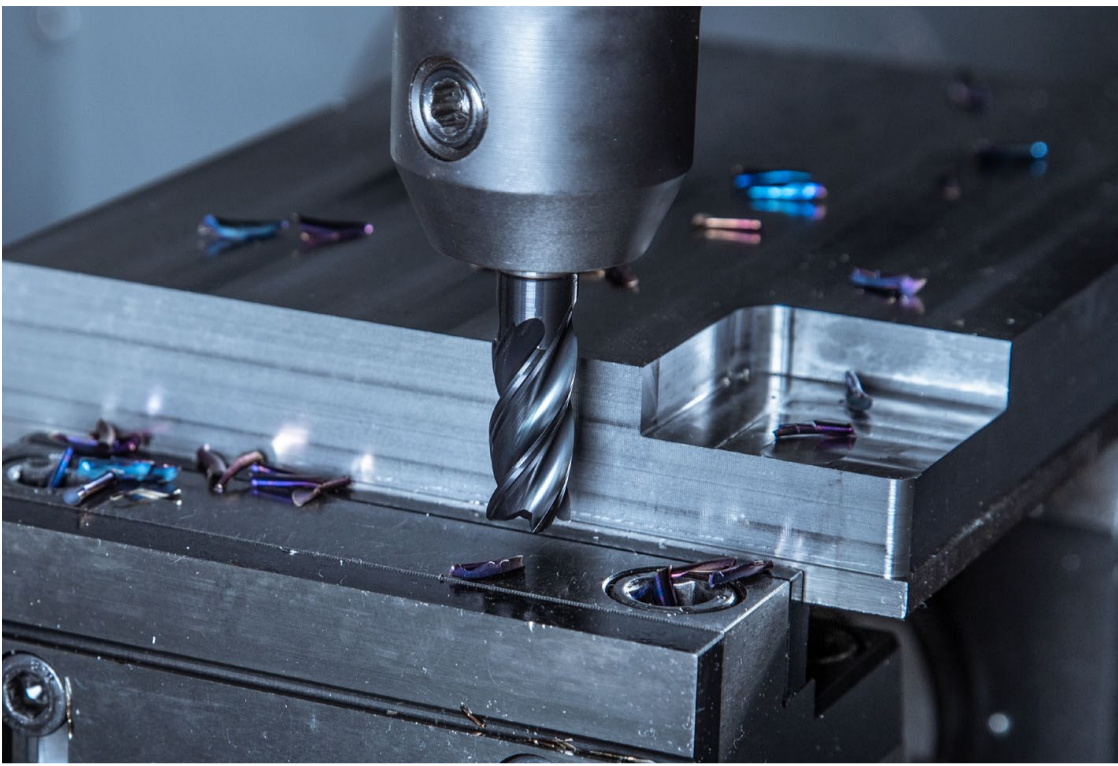

# TI 1000 STANDARD LINE

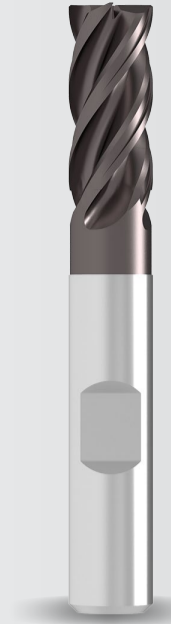


## End milling cutter

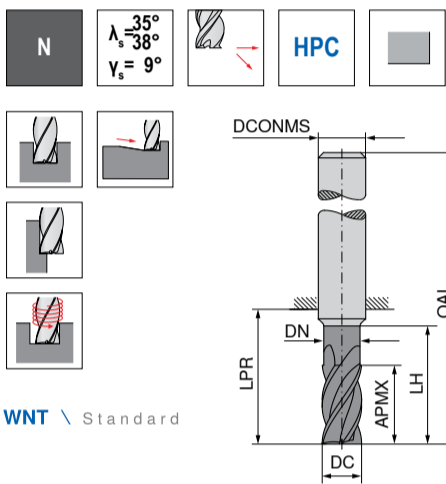


WNT \ Standard

DC <sub>h10</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	ZEFP
3	5			14	50	6	4
3	8	2.8	13	21	57	6	4
3	8	2.8	15	22	69	6	4
4	8			18	54	6	4
4	11	3.8	17	21	57	6	4
4	11	3.8	20	26	69	6	4
5	9			18	54	6	4
5	13	4.8	19	21	57	6	4
5	13	4.8	25	34	69	6	4
6	10			18	54	6	4
6	13	5.8	19	21	57	6	4
6	13	5.8	30	34	69	6	4
8	12			22	58	8	4
8	19	7.7	25	27	63	8	4
8	17	7.7	40	44	79	8	4
10	14			26	66	10	4
10	22	9.7	30	32	72	10	4
10	21	9.7	50	54	93	10	4
12	16			28	73	12	4
12	26	11.6	36	38	83	12	4
12	25	11.6	60	64	108	12	4
16	22			34	82	16	4
16	32	15.5	42	44	92	16	4
16	33	15.5	80	84	132	16	4
20	26			42	92	20	4
20	38	19.5	52	54	104	20	4
20	42	19.5	100	104	154	20	4

	●	●	●
P	●	●	●
M	●	●	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O			



54 070 ...	PG V3/5C	
	£	£
03100	<del>16.49</del>	14.00
04100	<del>16.49</del>	14.00
05100	<del>16.49</del>	14.00
06100	<del>16.49</del>	14.00
08100	<del>24.11</del>	20.00
10100	<del>30.44</del>	25.00
12100	<del>44.49</del>	37.00
16100	<del>77.99</del>	65.00
20100	<del>115.44</del>	98.00



54 070 ...	PG V3/5C	
	£	£
03200	<del>16.49</del>	14.00
04200	<del>16.49</del>	14.00
05200	<del>16.49</del>	14.00
06200	<del>20.99</del>	17.00
08200	<del>25.99</del>	21.00
10200	<del>34.25</del>	29.00
12200	<del>53.20</del>	45.00
16200	<del>82.46</del>	70.00
20200	<del>124.33</del>	105.00



54 070 ...	PG V3/5C	
	£	£
03400	<del>24.11</del>	20.00
04400	<del>24.11</del>	20.00
05400	<del>26.64</del>	22.00
06400	<del>30.44</del>	25.00
08400	<del>38.06</del>	32.00
10400	<del>53.20</del>	45.00
12400	<del>65.97</del>	56.00
16400	<del>123.06</del>	104.00
20400	<del>168.73</del>	143.00



# DRAGONSKIN

by CERATIZIT



For more information  
[cutting.tools/en/dragonskin](http://cutting.tools/en/dragonskin)



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: [techsupport.uk@ceratizit.com](mailto:techsupport.uk@ceratizit.com)




Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield



End milling cutter

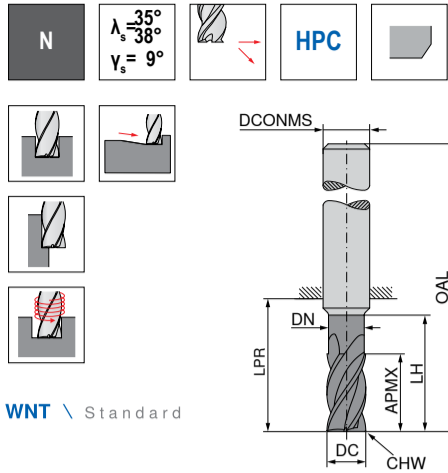

WNT \ Standard

DC <sub>h10</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	CHW mm	ZEFP
3	5			14	50	6	0.1	4
3	8	2.8	13	21	57	6	0.1	4
3	8	2.8	15	22	69	6	0.1	4
4	8			18	54	6	0.1	4
4	11	3.8	17	21	57	6	0.1	4
4	11	3.8	20	26	69	6	0.1	4
5	9			18	54	6	0.1	4
5	13	4.8	19	21	57	6	0.1	4
5	13	4.8	25	34	69	6	0.1	4
6	10			18	54	6	0.1	4
6	13	5.8	19	21	57	6	0.1	4
6	13	5.8	30	34	69	6	0.1	4
8	12			22	58	8	0.2	4
8	21	7.7	25	27	63	8	0.2	4
8	17	7.7	40	44	79	8	0.2	4
10	14			26	66	10	0.2	4
10	22	9.7	30	32	72	10	0.2	4
10	21	9.7	50	54	93	10	0.2	4
12	16			28	73	12	0.3	4
12	26	11.6	36	38	83	12	0.3	4
12	25	11.6	60	64	108	12	0.3	4
16	22			34	82	16	0.3	4
16	36	15.5	42	44	92	16	0.3	4
16	33	15.5	80	84	132	16	0.3	4
20	26			42	92	20	0.3	4
20	41	19.5	52	54	104	20	0.3	4
20	42	19.5	100	104	154	20	0.3	4


P	●	●	●
M	●	●	○
K	●	●	●
N	○	○	○
S	○	○	○
H			
O			

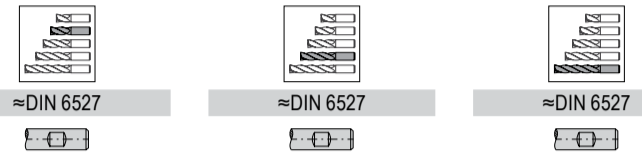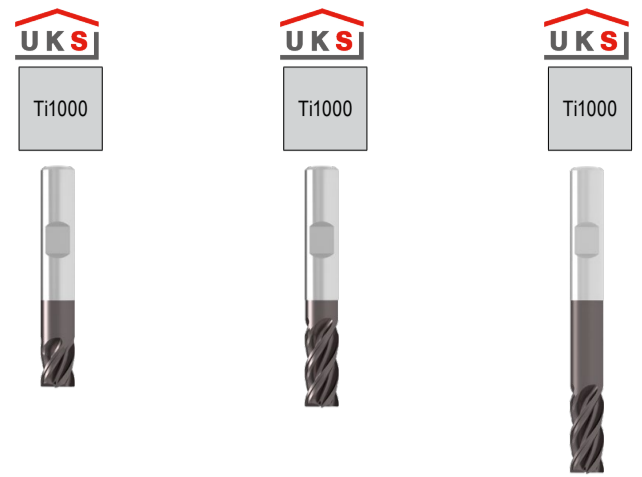

54 071 ...	PG V3/5C		54 071 ...	PG V3/5C		54 071 ...	PG V3/5C	
	£	£		£	£		£	£
03100	<del>16.49</del>	14.00	03200	<del>16.49</del>	14.00	03400	<del>24.11</del>	20.00
04100	<del>16.49</del>	14.00	04200	<del>16.49</del>	14.00	04400	<del>24.11</del>	20.00
05100	<del>16.49</del>	14.00	05200	<del>16.49</del>	14.00	05400	<del>26.64</del>	22.00
06100	<del>16.49</del>	14.00	06200	<del>20.30</del>	17.00	06400	<del>30.44</del>	25.00
08100	<del>24.11</del>	20.00	08200	<del>25.38</del>	21.00	08400	<del>38.06</del>	32.00
10100	<del>30.44</del>	25.00	10200	<del>34.25</del>	29.00	10400	<del>53.28</del>	45.00
12100	<del>44.40</del>	37.00	12200	<del>53.28</del>	45.00	12400	<del>66.07</del>	56.00
16100	<del>77.38</del>	65.00	16200	<del>82.46</del>	70.00	16400	<del>123.06</del>	104.00
20100	<del>115.44</del>	98.00	20200	<del>124.33</del>	105.00	20400	<del>168.73</del>	143.00

End milling cutter


▲ Cutting depth: 3 x DC

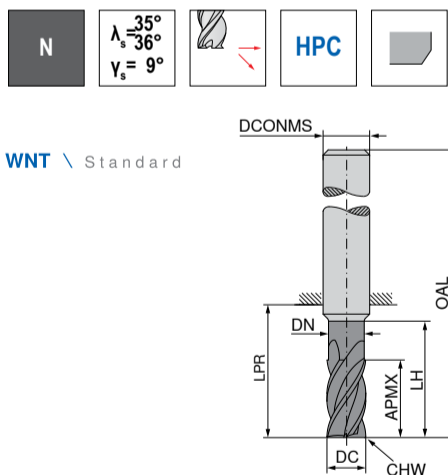

WNT \ Standard

DC <sub>h10</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	CHW mm	ZEFP
6	19	5.8	24	26	62	6	0.1	4
8	25	7.7	30	32	68	8	0.2	4
10	31	9.7	38	40	80	10	0.2	4
12	37	11.6	46	48	93	12	0.2	4
16	49	15.5	58	60	108	16	0.3	4
20	61	19.5	74	76	126	20	0.3	4

P	●
M	●
K	●
N	○
S	○
H	
O	




≈DIN 6527



54 078 ...	PG V3/5C	
	£	£
06200	<del>34.47</del>	29.00
08200	<del>44.51</del>	37.00
10200	<del>58.93</del>	49.00
12200	<del>92.73</del>	78.00
16200	<del>143.43</del>	121.00
20200	<del>215.88</del>	183.00



Get the most out of your solid carbide tools by using Centro-P → see page 84

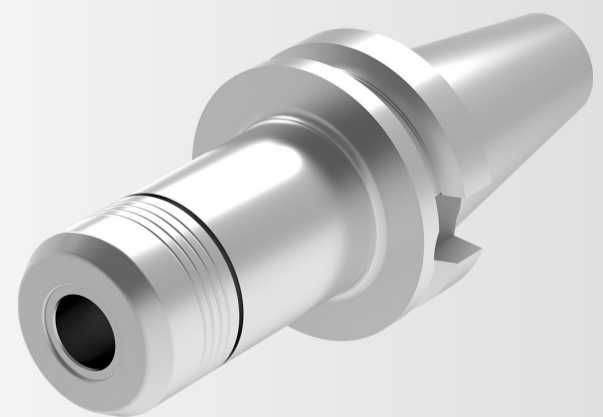



End milling cutter with corner radius

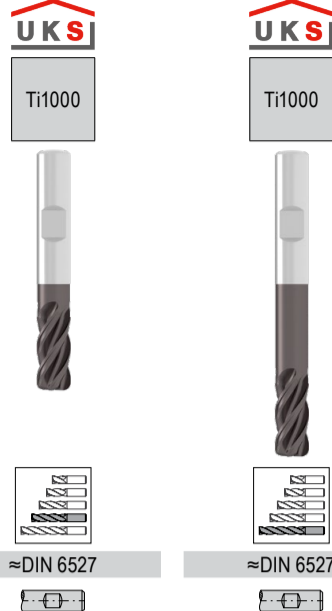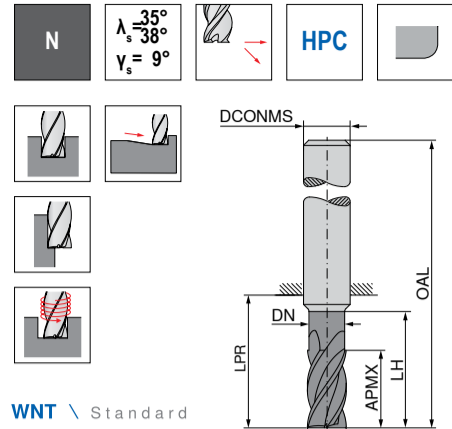

DC <sub>h10</sub>	RE	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEPF	54 072 ... PG V3/5C	54 072 ... PG V3/5C
mm	±0.05 mm	mm	mm	mm	mm	mm	mm		£	£
3	0.1	8	2.8	13	21	57	6	4	03201	<del>21.56</del> 18.00
3	0.3	8	2.8	13	21	57	6	4	03203	<del>21.56</del> 18.00
3	0.5	8	2.8	13	21	57	6	4	03205	<del>21.56</del> 18.00
3	1.0	8	2.8	13	21	57	6	4	03210	<del>21.56</del> 18.00
3	0.5	8	2.8	15	22	69	6	4		
3	0.3	8	2.8	15	22	69	6	4		
3	1.0	8	2.8	15	22	69	6	4		
4	0.1	11	3.8	17	21	57	6	4	04201	<del>21.56</del> 18.00
4	0.3	11	3.8	17	21	57	6	4	04203	<del>21.56</del> 18.00
4	0.5	11	3.8	17	21	57	6	4	04205	<del>21.56</del> 18.00
4	1.0	11	3.8	17	21	57	6	4	04210	<del>21.56</del> 18.00
4	0.5	11	3.8	20	26	69	6	4		
4	0.3	11	3.8	20	26	69	6	4		
4	1.0	11	3.8	20	26	69	6	4		
5	0.5	13	4.8	19	21	57	6	4	05205	<del>21.56</del> 18.00
5	0.1	13	4.8	19	21	57	6	4	05201	<del>21.56</del> 18.00
5	0.3	13	4.8	19	21	57	6	4	05203	<del>21.56</del> 18.00
5	1.0	13	4.8	19	21	57	6	4	05210	<del>21.56</del> 18.00
5	0.5	13	4.8	25	34	69	6	4		
5	0.3	13	4.8	25	34	69	6	4		
5	1.0	13	4.8	25	34	69	6	4		
6	0.3	13	5.8	19	21	57	6	4	06203	<del>24.11</del> 20.00
6	0.1	13	5.8	19	21	57	6	4	06201	<del>24.11</del> 20.00
6	0.5	13	5.8	19	21	57	6	4	06205	<del>24.11</del> 20.00
6	1.0	13	5.8	19	21	57	6	4	06210	<del>24.11</del> 20.00
6	1.5	13	5.8	19	21	57	6	4	06215	<del>24.11</del> 20.00
6	2.0	13	5.8	19	21	57	6	4	06220	<del>24.11</del> 20.00
6	1.0	13	5.8	30	34	69	6	4		
6	0.3	13	5.8	30	34	69	6	4		
6	0.5	13	5.8	30	34	69	6	4		
6	1.5	13	5.8	30	34	69	6	4		
6	2.0	13	5.8	30	34	69	6	4		
8	0.1	21	7.7	25	27	63	8	4	08201	<del>31.72</del> 26.00
8	0.3	21	7.7	25	27	63	8	4	08203	<del>31.72</del> 26.00
8	0.5	21	7.7	25	27	63	8	4	08205	<del>31.72</del> 26.00
8	1.0	21	7.7	25	27	63	8	4	08210	<del>31.72</del> 26.00
8	1.5	21	7.7	25	27	63	8	4	08215	<del>31.72</del> 26.00
8	2.0	21	7.7	25	27	63	8	4	08220	<del>31.72</del> 26.00
8	1.0	17	7.7	40	44	79	8	4		
8	0.3	17	7.7	40	44	79	8	4		
8	0.5	17	7.7	40	44	79	8	4		
8	1.5	17	7.7	40	44	79	8	4		
8	2.0	17	7.7	40	44	79	8	4		
10	1.0	22	9.7	30	32	72	10	4	10210	<del>40.60</del> 34.00
10	0.1	22	9.7	30	32	72	10	4	10201	<del>40.60</del> 34.00
10	0.3	22	9.7	30	32	72	10	4	10203	<del>40.60</del> 34.00
10	0.5	22	9.7	30	32	72	10	4	10205	<del>40.60</del> 34.00
10	1.5	22	9.7	30	32	72	10	4	10215	<del>40.60</del> 34.00
10	2.0	22	9.7	30	32	72	10	4	10220	<del>40.60</del> 34.00
10	1.0	21	9.7	50	54	93	10	4		
10	0.3	21	9.7	50	54	93	10	4		
10	0.5	21	9.7	50	54	93	10	4		
10	1.5	21	9.7	50	54	93	10	4		
10	2.0	21	9.7	50	54	93	10	4		
12	0.5	26	11.6	36	38	83	12	4	12205	<del>62.16</del> 52.00
12	0.1	26	11.6	36	38	83	12	4	12201	<del>62.16</del> 52.00
12	0.3	26	11.6	36	38	83	12	4	12203	<del>62.16</del> 52.00
12	1.0	26	11.6	36	38	83	12	4	12210	<del>62.16</del> 52.00
12	1.5	26	11.6	36	38	83	12	4	12215	<del>62.16</del> 52.00
12	2.0	26	11.6	36	38	83	12	4	12220	<del>62.16</del> 52.00
12	3.0	26	11.6	36	38	83	12	4	12230	<del>62.16</del> 52.00
12	1.5	25	11.6	60	64	108	12	4		
12	0.3	25	11.6	60	64	108	12	4		
12	0.5	25	11.6	60	64	108	12	4		
12	1.0	25	11.6	60	64	108	12	4		
12	2.0	25	11.6	60	64	108	12	4		
12	3.0	25	11.6	60	64	108	12	4		
16	0.3	36	15.5	42	44	92	16	4	16203	<del>95.15</del> 80.00
16	0.1	36	15.5	42	44	92	16	4	16201	<del>95.15</del> 80.00
16	0.5	36	15.5	42	44	92	16	4	16205	<del>95.15</del> 80.00
16	1.0	36	15.5	42	44	92	16	4	16210	<del>95.15</del> 80.00
16	1.5	36	15.5	42	44	92	16	4	16215	<del>95.15</del> 80.00
16	2.0	36	15.5	42	44	92	16	4	16220	<del>95.15</del> 80.00
16	3.0	36	15.5	42	44	92	16	4	16230	<del>95.15</del> 80.00
16	4.0	36	15.5	42	44	92	16	4	16240	<del>95.15</del> 80.00
16	1.5	33	15.5	80	84	132	16	4		
16	0.3	33	15.5	80	84	132	16	4		
16	0.5	33	15.5	80	84	132	16	4		
16	1.0	33	15.5	80	84	132	16	4		
16	2.0	33	15.5	80	84	132	16	4		
16	3.0	33	15.5	80	84	132	16	4		
16	4.0	33	15.5	80	84	132	16	4		
20	0.1	41	19.5	52	54	104	20	4	20201	<del>137.02</del> 116.00
20	0.3	41	19.5	52	54	104	20	4	20203	<del>137.02</del> 116.00
20	0.5	41	19.5	52	54	104	20	4	20205	<del>137.02</del> 116.00
20	1.0	41	19.5	52	54	104	20	4	20210	<del>137.02</del> 116.00
20	1.5	41	19.5	52	54	104	20	4	20215	<del>137.02</del> 116.00
20	2.0	41	19.5	52	54	104	20	4	20220	<del>137.02</del> 116.00
20	3.0	41	19.5	52	54	104	20	4	20230	<del>137.02</del> 116.00
20	4.0	41	19.5	52	54	104	20	4	20240	<del>137.02</del> 116.00
20	4.0	42	19.5	100	104	154	20	4		
20	0.3	42	19.5	100	104	154	20	4	20440	<del>215.67</del> 183.00
20	0.5	42	19.5	100	104	154	20	4	20403	<del>215.67</del> 183.00
20	1.0	42	19.5	100	104	154	20	4	20405	<del>215.67</del> 183.00
20	1.5	42	19.5	100	104	154	20	4	20410	<del>215.67</del> 183.00
20	2.0	42	19.5	100	104	154	20	4	20415	<del>215.67</del> 183.00
20	3.0	42	19.5	100	104	154	20	4	20420	<del>215.67</del> 183.00
20	4.0	42	19.5	100	104	154	20	4	20430	<del>215.67</del> 183.00


P	●	●
M	●	○
K	●	●
N	○	○
S	○	○
H	○	○
O		

Finish milling cutter

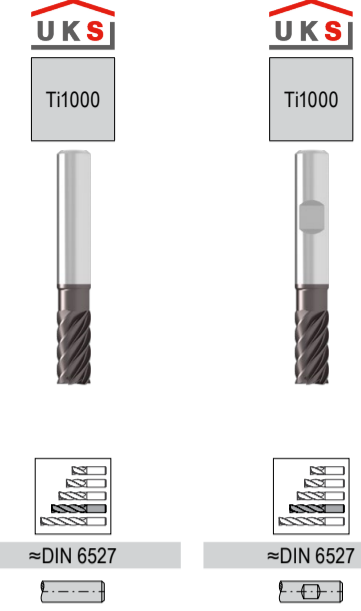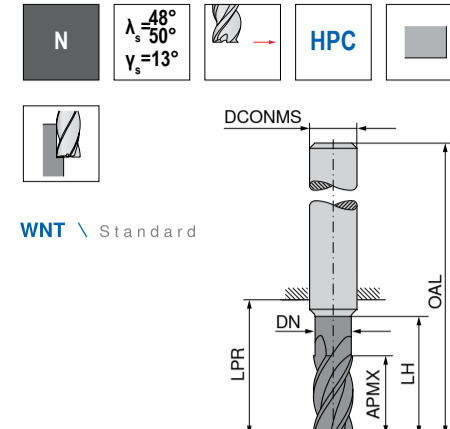

DC <sub>h10</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEPF	54 076 ... PG V3/5C	54 075 ... PG V3/5C
mm	mm	mm	mm	mm	mm	mm		£	£
6	13	5.6	19	21	57	6	6	06200	<del>24.11</del> 20.00
8	19	7.6	25	27	63	8	6	08200	<del>31.72</del> 26.00
10	22	9.6	30	32	72	10	6	10200	<del>41.87</del> 35.00
12	26	11.5	36	38	83	12	6	12200	<del>67.24</del> 57.00
16	32	15.0	42	44	92	16	6	16200	<del>102.76</del> 87.00
20	38	19.0	52	54	104	20	6	20200	<del>156.05</del> 132.00

Finish milling cutter

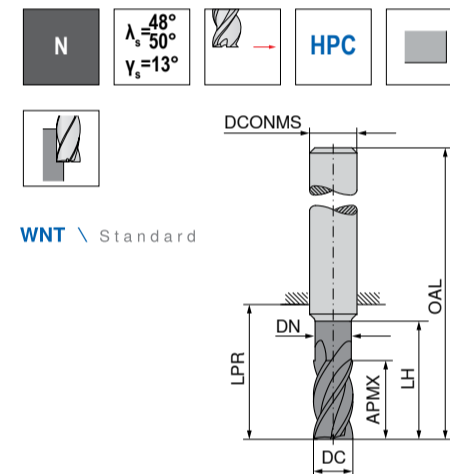

DC <sub>h10</sub>	APMX	DN	LH	LPR	OAL	DCONMS <sub>h6</sub>	ZEPF	54 076 ... PG V3/5C	54 075 ... PG V3/5C
mm	mm	mm	mm	mm	mm	mm		£	£
6	15	5.6	42	44	80	6	6	06400	<del>38.06</del> 32.00
8	20	7.6	62	64	100	8	6	08400	<del>48.21</del> 40.00
10	25	9.6	58	60	100	10	6	10400	<del>65.07</del> 56.00
12	30	11.5	73	75	120	12	6	12400	<del>81.10</del> 69.00
16	40	15.0	100	102	150	16	6	16400	<del>154.78</del> 131.00
20	50	19.0	98	100	150	20	6	20400	<del>211.87</del> 180.00

cutting.tools/sustainability

**CERATIZIT Recycling**  
Ecological, sustainable and economical



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com





Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield

### Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

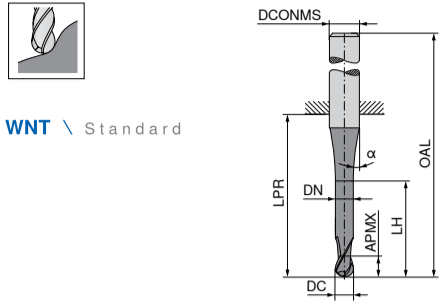

WNT \ Standard



Ti1000



≈DIN 6527


DC <sub>h10</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	α°	ZEFP
3	5	2.9	9	14	50	6	15	2
4	8	3.9	12	18	54	6	45	2
5	9	4.9	15	18	54	6	45	2
6	10	5.9	17	18	54	6	45	2
8	12	7.8	20	22	58	8	45	2
10	14	9.8	26	26	66	10	45	2
12	16	11.8	28	28	73	12	45	2
16	22	15.7	32	34	82	16	45	2
20	26	19.7	40	42	92	20	45	2

54 073 ...	PG V3/5C	£	£
03115		<del>20.30</del>	17.00
04120		<del>20.30</del>	17.00
05125		<del>20.30</del>	17.00
06130		<del>21.56</del>	18.00
08140		<del>27.90</del>	23.00
10150		<del>35.62</del>	30.00
12160		<del>50.75</del>	43.00
16180		<del>83.73</del>	71.00
20110		<del>119.26</del>	101.00

P	●
M	○
K	○
N	●
S	○
H	○
O	○

### Rough milling cutter

▲ With roughing profile

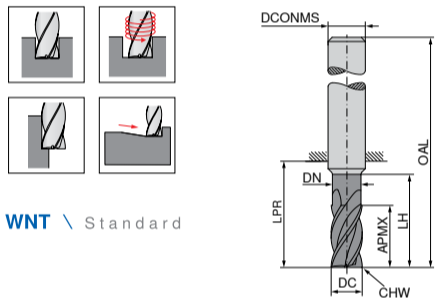

WNT \ Standard



Ti1000





≈DIN 6527

DC <sub>h6</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	CHW mm	ZEFP
4	11	3.8	17	21	57	6	0.1	4
5	13	4.8	19	21	57	6	0.1	4
6	13	5.8	19	21	57	6	0.1	4
8	21	7.7	25	27	63	8	0.2	4
10	22	9.7	30	32	72	10	0.2	4
12	26	11.6	36	38	83	12	0.3	4
16	36	15.5	42	44	92	16	0.3	4
20	41	19.5	52	54	104	20	0.3	4

54 077 ...	PG V3/5C	£	£
00400		<del>24.44</del>	20.00
00500		<del>24.44</del>	20.00
00600		<del>29.17</del>	24.00
00800		<del>36.79</del>	31.00
01000		<del>45.67</del>	38.00
01200		<del>74.86</del>	63.00
01600		<del>112.94</del>	95.00
02000		<del>167.46</del>	142.00

P	●
M	●
K	●
N	○
S	○
H	○
O	○

### Engraving cutter 60°

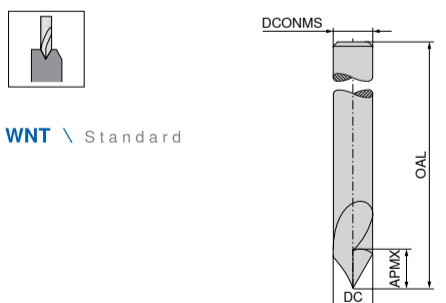

WNT \ Standard



Factory standard





DC <sub>h6</sub> mm	APMX mm	OAL mm	DCONMS <sub>h6</sub> mm	ZEFP
3	15	50	3	1
4	18	50	4	1
6	20	54	6	1

52 195 ...	PG V1	£	£
030		<del>67.74</del>	44.04
040		<del>74.42</del>	46.23
060		<del>77.45</del>	50.34

P	○
M	○
K	○
N	○
S	○
H	○
O	●

### Ball Nosed Cutter

▲ Radius accuracy: ± 0,01 mm

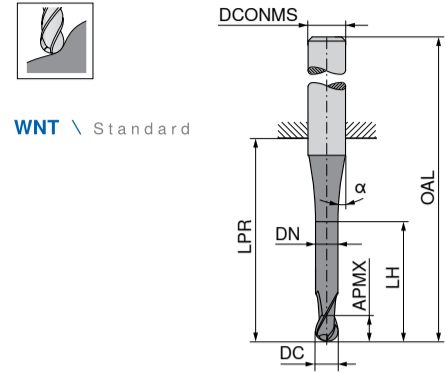

WNT \ Standard



Ti1000



≈DIN 6527



Ti1000





≈DIN 6527

DC <sub>h10</sub> mm	APMX mm	DN mm	LH mm	LPR mm	OAL mm	DCONMS <sub>h6</sub> mm	α°	ZEFP	54 074 ...	PG V3/5C	£	£
3	8			21	57	6	30	4	03115		<del>20.30</del>	17.00
3	8	2.8	13	21	57	6	30	4	04120		<del>20.30</del>	17.00
4	11	3.8	17	21	57	6	30	4	05125		<del>20.30</del>	17.00
5	13			21	57	6	30	4	06130		<del>21.56</del>	18.00
5	13	4.8	19	21	57	6	30	4	08140		<del>27.90</del>	23.00
6	13			21	57	6	30	4	10150		<del>35.62</del>	30.00
6	13	5.8	19	21	57	6	30	4	12160		<del>50.75</del>	43.00
8	19			36	72	8	30	4	16180		<del>83.73</del>	71.00
8	19	7.7	25	27	72	8	30	4	20110		<del>119.26</del>	101.00
10	22			32	72	10	30	4				
10	22	9.7	30	32	72	10	30	4				
12	26			38	83	12	30	4				
12	26	11.6	36	38	83	12	30	4				
16	32			44	92	16	30	4				
16	32	15.5	42	44	92	16	30	4				
20	38			54	104	20	30	4				
20	38	19.5	52	54	104	20	30	4				

54 074 ...	PG V3/5C	£	£
03215		<del>20.30</del>	17.00
04220		<del>20.30</del>	17.00
05225		<del>20.30</del>	17.00
06430		<del>24.11</del>	20.00
08440		<del>29.17</del>	24.00
10450		<del>38.06</del>	32.00
12460		<del>50.63</del>	50.00
16480		<del>87.54</del>	74.00
20410		<del>126.87</del>	107.00

P	●
M	●
K	●
N	○
S	○
H	○
O	○


### NC front and rear chamfer milling cutter

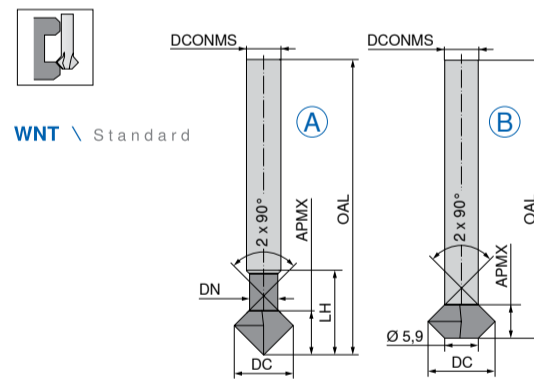

WNT \ Standard



Ti1000



Factory standard

DC mm	APMX mm	DN mm	LH mm	OAL mm	DCONMS <sub>h6</sub> mm	ZEFP	Fig.
3	2.0	2.2	12.0	75	4	4	A
4	2.7	2.9	17.7	75	4	4	A
5	3.0	3.9	18.0	75	5	4	A
6	4.0	3.9	19.0	100	6	4	A
8	2.0			100	6	4	B
10	4.0			100	6	4	B
12	6.0			100	6	4	B

52 159 ...	PG V1	£	£
030		<del>126.44</del>	82.18
040		<del>125.73</del>	81.73
050		<del>130.64</del>	84.90
060		<del>130.73</del>	84.97
080		<del>173.43</del>	112.54
100		<del>213.74</del>	138.93
120		<del>254.76</del>	165.60


P	●
M	○
K	●
N	○
S	○
H	○
O	●





# MILLING TOOLS WITH INDEXABLE INSERTS


## SYSTEM



MaxiMill 491 – first choice indexable shoulder milling system with 8 edges.



MaxiMill 252 – New generation heavy duty button milling system.



MaxiMill 251 – first choice indexable button milling system.



MaxiMill C 211-11 – first choice indexable end milling system.



WPS – first choice indexable chamfer milling cutter.



MaxiMill A 271-12 – first choice indexable face milling system also with high feed geometry option.



MaxiMill Slot-SX – New side and face milling cutters deliver maximum process security and optimum performance thanks to thro' coolant.




MaxiMill A HFC – first choice indexable high feed milling system.



MaxiMill 242 – first choice chamfer milling system.


## GRADES



CTPM240 – first choice for stainless steel and other corrosion resistant materials.



CTC5240 – first choice for titanium and heat resistant super alloys.



CTPP235 – first choice for steels with or without coolant.




M1 – first choice chipbreaker for parting off.





CTWN215 – first choice for aluminium and other non ferrous materials.

### MaxiMill – 491-09 Shell mill




CERATIZIT \ Performance

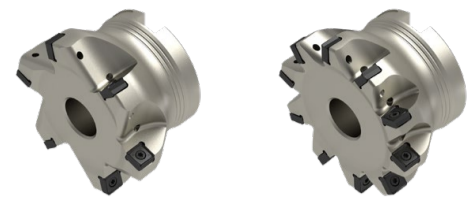



Designation	DC mm	OAL mm	DHUB mm	DCONMS <sub>H6</sub> mm	APMX mm	Insert	ZNF
A491.40.R.03-09	40	40	38	16	6	SNHU 09T3	3
A491.40.R.05-09	40	40	38	16	6	SNHU 09T3	5
A491.50.R.04-09	50	40	43	22	6	SNHU 09T3	4
A491.50.R.06-09	50	40	43	22	6	SNHU 09T3	6
A491.63.R.05-09	63	40	48	22	6	SNHU 09T3	5
A491.63.R.08-09	63	40	48	22	6	SNHU 09T3	8
A491.80.R.06-09	80	50	58	27	6	SNHU 09T3	6
A491.80.R.10-09	80	50	58	27	6	SNHU 09T3	10

50 775 ...	PG 2B/40		50 776 ...	PG 2B/40	
	£	£		£	£
240	<del>469.74</del>	58.74	240	<del>546.04</del>	68.19
250	<del>520.61</del>	65.04	250	<del>596.79</del>	74.48
263	<del>622.10</del>	77.63	263	<del>736.40</del>	91.26
280	<del>660.37</del>	81.82	280	<del>842.69</del>	100.70

### MaxiMill – 491-12 Shell mill



CERATIZIT \ Performance

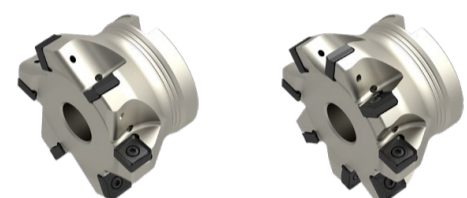


Designation	DC mm	OAL mm	DHUB mm	DCONMS <sub>H6</sub> mm	APMX mm	RPM 1/min.	torque moment Nm	Insert	ZNF
A491.50.R.04-12	50	40	43	22	8	9800	3,2	SNHU 1204	4
A491.50.R.05-12	50	40	43	22	8	9800	3,2	SNHU 1204	5
A491.63.R.05-12	63	40	48	22	8	8500	3,2	SNHU 1204	5
A491.63.R.06-12	63	40	48	22	8	8500	3,2	SNHU 1204	6
A491.80.R.06-12	80	50	58	27	8	7400	3,2	SNHU 1204	6
A491.80.R.08-12	80	50	58	27	8	7400	3,2	SNHU 1204	8
A491.100.R.07-12	100	50	78	32	8	6500	3,2	SNHU 1204	7
A491.100.R.10-12	100	50	78	32	8	6500	3,2	SNHU 1204	10

50 775 ...	PG 2B/40		50 776 ...	PG 2B/40	
	£	£		£	£
050	<del>520.61</del>	77.63	050	<del>558.74</del>	83.92
063	<del>622.10</del>	93.36	063	<del>660.37</del>	98.61
080	<del>660.37</del>	98.61	080	<del>761.85</del>	114.34
100	<del>837.99</del>	125.88	100	<del>952.45</del>	142.66


### SNHU

Designation	IC mm	L mm	S mm	D1 mm
SNHU 09T3..	9.15	9.15	3.70	3.85
SNHU 1204..	12.20	12.20	5.00	4.40



### SNHU

CERATIZIT \ Performance

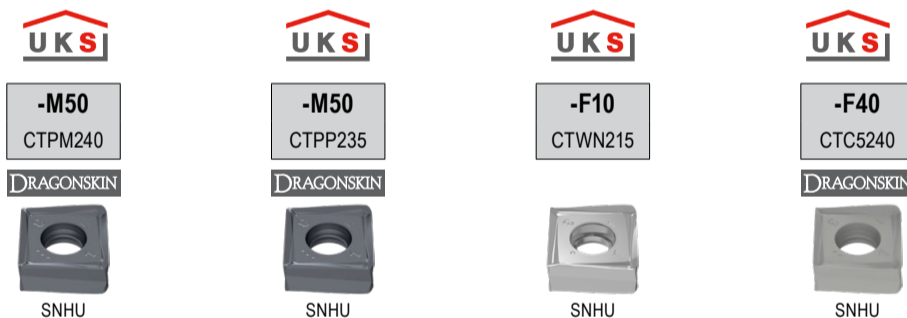


ISO	RE mm
09T308ER	0.8
09T308FR	0.8
09T308SR	0.8
09T312FR	1.2
09T312SR	1.2
09T316FR	1.6
09T316SR	1.6

51 120 ...	PG 1B/61		51 120 ...	PG 1B/61		51 118 ...	PG 1B/61		51 126 ...	PG 1H/17	
	£	£		£	£		£	£		£	£
408	<del>26.58</del>	19.94	108	<del>26.58</del>	19.94	358	<del>26.58</del>	19.94	15800	<del>23.25</del>	24.95
41200	<del>26.58</del>	19.94	11200	<del>26.58</del>	19.94	36200	<del>26.58</del>	19.94			
41600	<del>26.58</del>	19.94	11600	<del>26.58</del>	19.94	36600	<del>26.58</del>	19.94			

### SNHU

CERATIZIT \ Performance

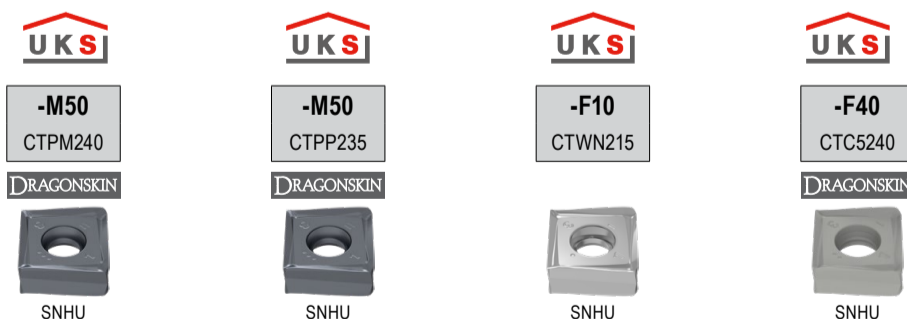


ISO	RE mm
120408ER	0.8
120408FR	0.8
120408SR	0.8
120412FR	1.2
120412SR	1.2
120416FR	1.6
120416SR	1.6
120420FR	2.0
120420SR	2.0

51 100 ...	PG 1B/61		51 100 ...	PG 1B/61		51 101 ...	PG 1B/61		51 128 ...	PG 1H/17	
	£	£		£	£		£	£		£	£
408	<del>32.47</del>	24.35	108	<del>32.47</del>	24.35	358	<del>32.47</del>	24.35	15800	<del>30.02</del>	29.95
			112	<del>32.47</del>	24.35	362	<del>32.47</del>	24.35			
			116	<del>32.47</del>	24.35	366	<del>32.47</del>	24.35			
			120	<del>32.47</del>	24.35	370	<del>32.47</del>	24.35			





### MaxiMill – 211-11 End milling cutter

▲ Insert radius >1,6 mm: Modify cutter body



CERATIZIT \ Performance

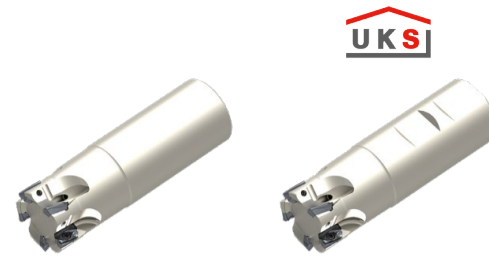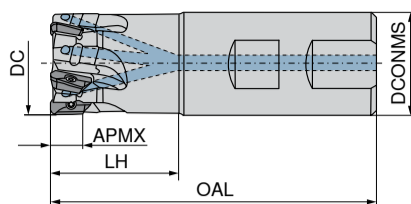


ISO designation	DC mm	OAL mm	LH mm	DCONMS <sub>ns</sub> mm	APMX mm	RPMX 1/min.	Insert	ZNF
C211.16.R.02-11-A-25	16	75	25	16	10	42000	XD.T 11T3	2
C211.16.R.02-11-B-25	16	75	25	16	10	42000	XD.T 11T3	2
C211.16.R.02-11-A15-32-165	16	165	32	15	10	14800	XD.T 11T3	2
C211.16.R.02-11-A-32-165	16	165	32	16	10	14800	XD.T 11T3	2
C211.20.R.03-11-A-25	20	77	25	20	10	36900	XD.T 11T3	3
C211.20.R.03-11-B-25	20	77	25	20	10	36900	XD.T 11T3	3
C211.20.R.02-11-A-25	20	77	25	20	10	36900	XD.T 11T3	2
C211.20.R.03-11-A-32-165	20	165	32	20	10	15800	XD.T 11T3	3
C211.20.R.02-11-A19-40-200	20	200	40	19	10	10500	XD.T 11T3	2
C211.20.R.02-11-A-40-200	20	200	40	20	10	10500	XD.T 11T3	2
C211.25.R.03-11-A-32	25	90	32	25	10	33200	XD.T 11T3	3
C211.25.R.04-11-B-32	25	90	32	25	10	33200	XD.T 11T3	4
C211.25.R.04-11-A-32	25	90	32	25	10	33200	XD.T 11T3	4
C211.25.R.04-11-A-40-165	25	165	40	25	10	19900	XD.T 11T3	4
C211.25.R.03-11-A-50-225	25	225	50	25	10	9400	XD.T 11T3	3
C211.25.R.03-11-A24-50-225	25	225	50	24	10	9400	XD.T 11T3	3
C211.25.R.02-11-A-50-225	25	225	50	25	10	9400	XD.T 11T3	2
C211.32.R.04-11-A-40	32	102	40	32	10	30200	XD.T 11T3	4
C211.32.R.05-11-B-40	32	102	40	32	10	30200	XD.T 11T3	5
C211.32.R.05-11-A-40	32	102	40	32	10	30200	XD.T 11T3	5
C211.32.R.04-11-A25-40	32	102	40	25	10	30200	XD.T 11T3	4
C211.32.R.05-11-A-50-165	32	165	50	32	10	20900	XD.T 11T3	5
C211.32.R.04-11-A-64-250	32	250	64	32	10	8500	XD.T 11T3	4

50 737 ...	PG 2B/40	50 737 ...	PG 2B/40
£	£	£	£
116	<del>270.14</del> 34.62	016	<del>270.14</del> 34.62
316	<del>270.14</del> 34.62	216	<del>270.14</del> 34.62
120	<del>316.04</del> 38.81	020	<del>316.04</del> 38.81
12002	<del>294.28</del> 38.81	320	<del>316.04</del> 38.81
620	<del>294.28</del> 36.72	420	<del>294.28</del> 36.72
625	<del>332.05</del> 40.91	025	<del>354.69</del> 44.06
125	<del>354.69</del> 44.06	325	<del>354.69</del> 44.06
425	<del>332.05</del> 40.91	825	<del>332.05</del> 40.91
02502	<del>369.72</del> 39.86	13204	<del>369.72</del> 48.25
132	<del>369.72</del> 48.25	53204	<del>369.72</del> 48.25
332	<del>369.72</del> 48.25	432	<del>369.72</del> 46.16
432	<del>369.72</del> 46.16		


### XDKT

Designation	IC mm	D1 mm	L mm	BS mm	S mm
XDKT 11T302..	6.8	2.8	10.6	2	3.80
XDKT 11T304..	6.8	2.8	10.6	1.8	3.80
XDKT 11T308..	6.8	2.8	10.6	1.4	3.80
XDKT 11T312..	6.8	2.8	10.6	1.4	3.80
XDKT 11T316..	6.8	2.8	10.6	1.4	3.80
XDKT 11T320..	6.8	2.8	10.6	1.4	3.80
XDKT 11T325..	6.8	2.8	10.6	1.4	3.80
XDKT 11T332..	6.8	2.8	10.6	0.8	3.80
XDKT 11T332..	6.8	2.8	10.6	1.4	3.80
XDKT 11T340..	6.8	2.8	10.6	-	3.80



### XDKT

CERATIZIT \ Performance

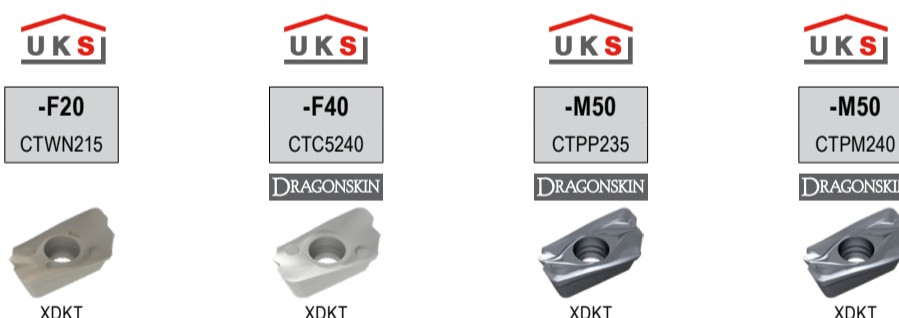


ISO	50 478 ...	PG 1A/90	50 463 ...	PG 1H/17	51 037 ...	PG 1B/61	51 037 ...	PG 1B/61
	£	£	£	£	£	£	£	£
11T302FR	502	<del>21.39</del> 16.04	504	<del>21.99</del> 18.62	104	<del>47.03</del> 12.77	404	<del>47.03</del> 12.77
11T304ER	504	<del>21.39</del> 16.04	500	<del>21.99</del> 18.62	108	<del>47.03</del> 12.77	408	<del>47.03</del> 12.77
11T304FR	508	<del>21.39</del> 16.04	512	<del>21.99</del> 18.62	112	<del>47.03</del> 12.77	412	<del>47.03</del> 12.77
11T304SR	520 <sup>1)</sup>	<del>21.39</del> 16.04	516	<del>21.99</del> 18.62	120 <sup>1)</sup>	<del>47.03</del> 12.77	420 <sup>1)</sup>	<del>47.03</del> 12.77
11T308ER	525 <sup>1)</sup>	<del>21.39</del> 16.04	520 <sup>1)</sup>	<del>21.99</del> 18.62	125 <sup>1)</sup>	<del>47.03</del> 12.77	432 <sup>1)</sup>	<del>47.03</del> 12.77
11T308FR			525 <sup>1)</sup>	<del>21.99</del> 18.62				
11T308SR			532 <sup>1)</sup>	<del>21.99</del> 18.62				
11T312ER			540 <sup>1)</sup>	<del>21.99</del> 18.62				
11T312SR								
11T316ER								
11T320ER								
11T320FR								
11T320SR								
11T325ER								
11T325FR								
11T325SR								
11T332ER								
11T332SR								
11T340ER								


1) Insert radius >1.6 mm: Modify cutter body

### MaxiMill – 271-12 Face mill

▲ 8 cutting edges per insert




CERATIZIT \ Performance





ISO designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS <sub>H6</sub> mm	RPMX 1/min.	torque moment Nm	Insert
A271.40.R.04-12	40	53	4	6.8	40	38	16	17900	3,2	SOHU 1204.. / XOHU 1204..
A271.50.R.05-12	50	63	5	6.8	40	43	22	15200	3,2	SOHU 1204.. / XOHU 1204..
A271.63.R.07-12	63	76	7	6.8	40	48	22	13100	3,2	SOHU 1204.. / XOHU 1204..
A271.80.R.06-12	80	93	6	6.8	50	58	27	11300	3,2	SOHU 1204.. / XOHU 1204..
A271.80.R.08-12	80	93	8	6.8	50	58	27	11300	3,2	SOHU 1204.. / XOHU 1204..
A271.100.R.07-12	100	113	7	6.8	63	78	32	9900	3,2	SOHU 1204.. / XOHU 1204..
A271.100.R.10-12	100	113	10	6.8	63	78	32	9900	3,2	SOHU 1204.. / XOHU 1204..

50 787 ... PG 2B/40		50 787 ... PG 2B/40	
£	£	£	£
04004	<del>193.61</del>	60.84	
05005	<del>595.95</del>	62.94	
06307	<del>644.70</del>	79.72	
08008	<del>740.44</del>	92.31	08006 <del>644.70</del> 79.72
10010	<del>925.56</del>	114.34	10007 <del>844.39</del> 100.70

### MaxiMill – 271-12 HFC Face mill



CERATIZIT \ Performance




ISO designation	DC mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS <sub>H6</sub> mm	RPMX 1/min.	torque moment Nm	Insert
A271.50.R.04-12-HFC	30	4	2.6	40	43	22	14600	3,2	SOHU 1204..
A271.63.R.06-12-HFC	43	6	2.6	40	48	22	12500	3,2	SOHU 1204..
A271.80.R.07-12-HFC	60	7	2.6	50	58	27	10800	3,2	SOHU 1204..

50 788 ... PG 2B/40	
£	£
05004	<del>595.95</del> 62.94
06306	<del>644.70</del> 79.72
08007	<del>740.44</del> 92.31


### SOHU

Designation	IC mm	D1 mm	L mm	BS mm	S mm
SOHU 1204AB..	13.36	4.4	8.8	1.7	5.00



### SOHU

CERATIZIT \ Performance

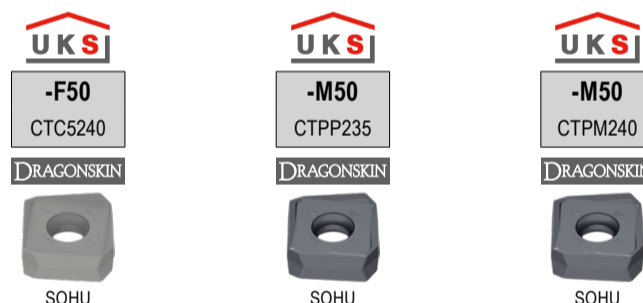

ISO	RE mm	51 140 ... PG 1H/17		51 138 ... PG 1B/61		51 138 ... PG 1B/61	
		£	£	£	£	£	£
1204ABSR	0.8	17000	<del>38.39</del> 32.63	12000	<del>34.23</del> 23.42	42000	<del>34.23</del> 23.42

P	●	○
M	○	○
K	○	○
N	○	○
S	○	○
H	○	○
O	○	○

## Complex Components. Precision Metal Cutting.

We understand the requirements of the market. Those who wish to get ahead of the competition need to be able to machine complex components with precision. We supply you with the right high-quality tools together with a machining strategy from a single source.

[www.just-our-thing.uk](http://www.just-our-thing.uk)


**JUST  
OUR  
THING**



**THE Cutting Tool Solution**




### MaxiMill – HFC high-feed end mill




CERATIZIT \ Performance

ISO designation	DC	OAL	LH	DCONMS <sub>H6</sub>	APMX	RPMX	Insert	ZNF
	mm	mm	mm	mm	mm	1/min.		
CHFC.16.R.02-06-A-40-200	7.0	200	40	16	0.8	4600	XPLX 0603..	2
CHFC.16.R.02-06-B-40	7.0	89	40	16	0.8	17300	XPLX 0603..	2
CHFC.20.R.03-06-A-50-225	11.0	225	50	20	0.8	4200	XPLX 0603..	3
CHFC.20.R.03-06-B-50	11.0	101	50	20	0.8	14500	XPLX 0603..	3
CHFC.25.R.02-09-A-50-225	12.3	225	50	25	1.0	9000	XDLX 09T3..	2
CHFC.25.R.03-09-A-50-225	12.3	225	50	25	1.0	9000	XDLX 09T3..	3
CHFC.32.R.02-12-A-63-250	14.8	250	63	32	2.0	6480	XOLX 1204..	2
CHFC.25.R.04-06-A-50-225	16.0	225	50	25	0.8	4600	XPLX 0603..	4
CHFC.25.R.04-06-B-50	16.0	107	50	25	0.8	15600	XPLX 0603..	4
CHFC.35.R.03-12-A-63-250	17.8	250	63	32	2.0	6480	XOLX 1204..	3
CHFC.32.R.03-09-A-63-250	19.3	250	63	32	1.0	8100	XDLX 09T3..	3
CHFC.32.R.05-06-A-25-60-225	23.0	225	60	25	0.8	3900	XPLX 0603..	5
CHFC.32.R.05-06-B-25-60	23.0	117	60	25	0.8	11000	XPLX 0603..	5

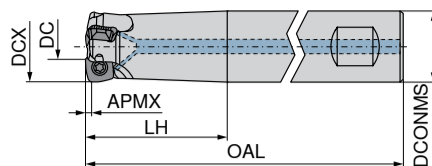


50 681 ... PG 2B/40		50 681 ... PG 2B/40			
£	£	£	£		
716	<del>279.14</del>	36.72	616	<del>279.14</del>	36.72
720	<del>316.04</del>	40.91	620	<del>316.04</del>	40.91
025	<del>334.23</del>	41.96			
125	<del>350.81</del>	44.06			
132	<del>350.50</del>	43.01			
725	<del>354.69</del>	46.16	625	<del>354.69</del>	46.16
035	<del>374.89</del>	46.16			
032	<del>374.89</del>	46.16			
732	<del>392.46</del>	51.40	632	<del>392.46</del>	51.40

### MaxiMill – HFC high-feed face mill



CERATIZIT \ Performance


ISO designation	DC	OAL	DCONMS <sub>H6</sub>	DHUB	APMX	RPMX	Insert	ZNF
	mm	mm	mm	mm	mm	1/min.		
AHFC.32.R.03-09	19.3	40	16	38	1	27700	XDLX 09T3..	3
AHFC.35.R.04-09	19.3	40	16	38	1	26700	XDLX 09T3..	4
AHFC.40.R.04-09	27.3	40	16	38	1	26400	XDLX 09T3..	4
AHFC.42.R.05-09	29.3	40	16	38	1	26100	XDLX 09T3..	5
AHFC.50.R.05-09	37.3	40	22	43	1	23500	XDLX 09T3..	5
AHFC.52.R.06-09	39.3	40	22	43	1	23000	XDLX 09T3..	6
AHFC.63.R.06-09	50.3	40	22	48	1	20500	XDLX 09T3..	6
AHFC.66.R.07-09	53.3	40	22	48	1	20000	XDLX 09T3..	7
AHFC.40.R.03-12	22.8	40	16	38	2	21120	XOLX 1204..	3
AHFC.42.R.04-12	24.8	40	16	38	2	20880	XOLX 1204..	4
AHFC.50.R.04-12	32.8	40	22	43	2	18800	XOLX 1204..	4
AHFC.52.R.05-12	34.8	40	22	43	2	18400	XOLX 1204..	5
AHFC.63.R.05-12	45.8	40	22	48	2	16400	XOLX 1204..	5
AHFC.66.R.06-12	48.8	40	22	48	2	16000	XOLX 1204..	6



50 683 ... PG 2B/40		50 683 ... PG 2B/40			
£	£	£	£		
032	<del>374.89</del>	46.16	040	<del>394.28</del>	48.25
035	<del>395.27</del>	49.30	042	<del>415.61</del>	51.40
140	<del>415.61</del>	51.40	050	<del>464.48</del>	57.70
142	<del>436.94</del>	54.55	052	<del>486.96</del>	60.84
150	<del>458.28</del>	60.84	063	<del>537.69</del>	67.14
152	<del>479.61</del>	63.99	066	<del>559.02</del>	69.23
163	<del>500.95</del>	69.23			
16600	<del>522.28</del>	76.58			

### XPLX

CERATIZIT \ Performance



ISO	RE	IC	D1	L	AN	S
	mm	mm	mm	mm	°	mm
060305ER	0.5	6.35	2.8	6	11	2.75
060305SR	0.5	6.35	2.8	6	11	2.75

UKS

-F40

CTC5240

DRAGONSKIN



XPLX

50 518 ... PG 1H/17		50 518 ... PG 1H/17			
£	£	£	£		
558	<del>18.23</del>	15.49			

UKS

-M50

CTPP235

DRAGONSKIN



XPLX

51 019 ... PG 1B/61		51 019 ... PG 1B/61			
£	£	£	£		
105	<del>14.95</del>	11.21			

UKS

-M50

CTPM240

DRAGONSKIN




XPLX

51 019 ... PG 1B/61		51 019 ... PG 1B/61			
£	£	£	£		
405	<del>14.95</del>	11.21			

### XDLX

CERATIZIT \ Performance



ISO	RE	IC	D1	L	AN	S
	mm	mm	mm	mm	°	mm
09T308ER	0.8	9.52	4.4	9	15	3.97
09T308SR	0.8	9.52	4.4	9	15	3.97

UKS

-F40

CTC5240

DRAGONSKIN



XDLX

50 503 ... PG 1H/17		50 503 ... PG 1H/17			
£	£	£	£		
558	<del>18.59</del>	15.80			

UKS

-M50

CTPP235

DRAGONSKIN



XDLX

51 016 ... PG 1B/61		51 016 ... PG 1B/61			
£	£	£	£		
108	<del>15.40</del>	11.55			

UKS

-M50

CTPM240

DRAGONSKIN




XDLX

51 016 ... PG 1B/61		51 016 ... PG 1B/61			
£	£	£	£		
408	<del>15.40</del>	11.55			

### XOHX / XOLX

CERATIZIT \ Performance



ISO	RE	IC	D1	L	AN	S
	mm	mm	mm	mm	°	mm
120410SR	1.0	12.7	5.5	12	10	4.76

UKS

-F50

CTC5240

DRAGONSKIN



XOHX

51 124 ... PG 1H/17		51 124 ... PG 1H/17			
£	£	£	£		
16000	<del>28.28</del>	24.04			

UKS

-M50

CTPP235

DRAGONSKIN



XOLX

51 017 ... PG 1B/61		51 017 ... PG 1B/61			
£	£	£	£		
110	<del>18.47</del>	13.86			

UKS

-M50


CTPM240

DRAGONSKIN



XOLX

51 017 ... PG 1B/61		51 017 ... PG 1B/61			
£	£	£	£		
410	<del>18.47</del>	13.86			

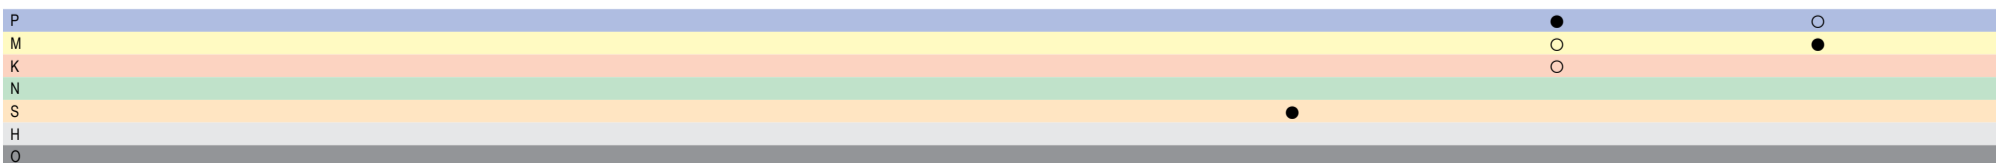

**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: [techsupport.uk@ceratizit.com](mailto:techsupport.uk@ceratizit.com)




Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

MaxiMill – 252 Shell mill



CERATIZIT \ Performance




ISO designation	DC mm	DCX mm	ZNF	APMX mm	OAL mm	DHUB mm	DCONMS mm	torque moment Nm	Insert
A252.40.R.04-12	28	40	4	3	40	38	16	3,2	RNHU 1205..
A252.50.R.05-12	38	50	5	3	40	43	22	3,2	RNHU 1205..
A252.52.R.05-12	40	52	5	3	40	43	22	3,2	RNHU 1205..
A252.63.R.06-12	51	63	6	3	40	48	22	3,2	RNHU 1205..

50 689 ...		PG 2B/40	
	£		£
240	<del>455.59</del>		68.19
250	<del>552.17</del>		82.87
252	<del>554.59</del>		82.87
263	<del>683.35</del>		102.80

RNHU

Designation	IC mm	D1 mm	S mm
RNHU 1205..	12	4.4	5.30



RNHU

CERATIZIT \ Performance

**NEW**

**-M32**

CTPM245

DRAGONSKIN



RNHU

**NEW**

**-M31**

CTC5240

DRAGONSKIN



RNHU

ISO	51 107 ...		PG 1H/17		50 521 ...		PG 1H/17	
	£	£	£	£	£	£	£	
1205M4ER	475	<del>32.89</del>	27.96	552	<del>32.89</del>	27.96		
P								
M								
K								
N								
S								
H								
O								



**UK LOGISTICS**  
 WHEN YOU SEE THIS LOGO  
 IT'S IN STOCK IN SHEFFIELD




**Customer Service Centre**  
 Freephone: 0800 073 2 073  
 Email: info.uk@ceratizit.com




**Ordering via the Online Shop**  
<http://cuttingtools.ceratizit.com>



MaxiMill – 251 RS Shell mill



CERATIZIT \ Performance




ISO designation	DCX mm	DC mm	OAL mm	APMX mm	DHUB mm	DCONMS <sub>H6</sub> mm	RPMX 1/min.	Insert	ZNF
A251.40.R.05-10-RS	40	30	40	5	38	16	16000	RP.X 10T3..	5
A251.42.R.06-10-RS	42	32	40	5	38	16	16000	RP.X 10T3..	6
A251.50.R.06-10-RS	50	40	40	5	43	22	12500	RP.X 10T3..	6
A251.52.R.06-10-RS	52	42	40	5	43	22	12500	RP.X 10T3..	6
A251.40.R.04-12-RS	40	28	40	6	38	16	15900	RP.X 1204..	4
A251.50.R.05-12-RS	50	38	40	6	43	22	12500	RP.X 1204..	5
A251.52.R.05-12-RS	52	40	40	6	43	22	12500	RP.X 1204..	5
A251.63.R.06-12-RS	63	51	40	6	48	22	10000	RP.X 1204..	6
A251.66.R.07-12-RS	66	54	40	6	48	22	9000	RP.X 1204..	7
A251.80.R.07-12-RS	80	68	50	6	58	27	8000	RP.X 1204..	7

50 686 ...	PG 2B/40
140	£ 430.75 / £ 53.50
142	£ 495.05 / £ 61.89
150	£ 542.25 / £ 63.99
152	£ 542.25 / £ 63.99
340	£ 396.23 / £ 49.30
050	£ 480.88 / £ 59.79
052	£ 504.39 / £ 66.09
063	£ 599.75 / £ 73.43
166	£ 625.97 / £ 81.82
080	£ 669.89 / £ 82.87

RPHX / RPNX

Designation	IC mm	D1 mm	S mm
RP.X 10T3..	10	3.4	3.97
RP.X 1204..	12	4.4	4.76



RPHX / RPNX

CERATIZIT \ Performance

**-M31**  
CTC5240  
DRAGONSKIN

RPHX

**-M50**  
CTPP235  
DRAGONSKIN

RPNX

**-F50**  
CTPP235  
DRAGONSKIN

RPHX

**-M50**  
CTPM240  
DRAGONSKIN

RPHX

ISO	50 493 ...	PG 1H/17	51 054 ...	PG 1B/61	51 051 ...	PG 1B/61	51 050 ...	PG 1B/61
10T3M4EN	550 <sup>1)</sup>	£ 49.62 / £ 16.68						
10T3M8EN	551	£ 49.62 / £ 16.68						
10T3M8SN			12000	£ 41.83 / £ 8.87	12000	£ 45.53 / £ 11.64	420	£ 45.53 / £ 11.64
1204M4EN	552 <sup>1)</sup>	£ 24.61 / £ 18.37						
1204M6EN	56200	£ 24.61 / £ 18.37						
1204M8EN	582	£ 24.61 / £ 18.37						
1204M8SN			125	£ 49.60 / £ 10.20	125	£ 47.03 / £ 12.77	425	£ 47.03 / £ 12.77

P								
M								
K								
N								
S								
H								
O								

1) Insert with 4 indexes

## Technical Support. When You Need it Most.

As engineers, we know our craft and have a thorough understanding of production processes. If you need us, we are on hand to help with extensive expertise.

[www.just-our-thing.uk](http://www.just-our-thing.uk)

**JUST  
OUR  
THING**



THE Cutting Tool Solution



Technical support: 0800 073 2 075  
3 time served engineers, available from 8:00 am to 6:00 pm, Monday to Friday  
Email: [techsupport.uk@ceratizit.com](mailto:techsupport.uk@ceratizit.com)




Order by 6:00 pm and get your guaranteed free express delivery




When you see this logo it's in stock in Sheffield

### MaxiMill – 242 Chamfer Cutter

▲ Caution: Use only inserts with a corner radius of less than 1.6 mm  
 ▲ ZEFP = number of inserts  
 ▲ ZNP = tooth rows



CERATIZIT \ Performance



KAPR °	DC mm	DCX mm	ZNF	APMX mm	ZEFP	b <sub>±0.3</sub> mm	OAL mm	DCONMS mm	DHUB mm	ZNP	torque moment Nm	Insert
30	35	83.60	3	13.6	6	27.6	50	27	62.5	2	3,2	LD.. 15...
45	35	74.60	3	19.3	6	27.6	50	27	62.5	2	3,2	LD.. 15...
15	35	89.60	3	7.0	6	27.6	50	27	62.5	2	3,2	LD.. 15...
60	35	62.70	3	23.6	6	27.6	50	22	49.0	2	3,2	LD.. 15...
75	35	49.48	3	26.7	6	27.6	60	22	49.0	2	3,2	LD.. 15...

50 768 ...	PG 2B/40
£	£
13003	<del>455.81</del> 68.19
14503	<del>455.81</del> 68.19
11503	<del>455.81</del> 68.19
16003	<del>455.81</del> 68.19
17503 <sup>1)</sup>	<del>455.81</del> 68.19

1) Version with Powerscrew

### LDFT

CERATIZIT \ Performance



51 157 ...	PG 1A/90
£	£
00802	<del>20.75</del> 22.31

ISO designation	IC mm	D1 mm	L mm	BS mm	S mm	ISO	RE mm
LDFT 150408FR	9.52	4.4	15	1.2	4.76	150408FR	0.8


### Indexable chamfer milling 60°

Scope of supply:  
Indexable insert countersink including clamping screws

### Indexable chamfer milling 90°



Scope of supply:  
Indexable insert countersink including clamping screws

KOMET \ Performance



DCX mm	DCN mm	PHD mm	ZEFP	DCONMS mm	OAL mm	Insert	30 196 ...	PG U1/4D
19	7	9.5	2	16	100	TOHX 090204	£	£
23	11	12.0	2	16	100	TOHX 090204	<del>496.88</del>	52.45
26	11	12.0	1	16	100	TOHX 090204	<del>500.69</del>	52.45
30	12	13.0	2	20	100	TOHX 140305	<del>523.53</del>	52.45
34	16	17.0	2	20	100	TOHX 140305	<del>532.57</del>	52.45
37	19	20.0	2	20	100	TOHX 140305	<del>532.57</del>	52.45


KOMET \ Performance



DCX mm	DCN mm	PHD mm	ZEFP	DCONMS mm	OAL mm	Insert	30 197 ...	PG U1/4D
16.5	8.1	8.5	1	16	100	TOHX 090204	£	£
20.0	11.6	12.0	2	16	100	TOHX 090204	<del>496.88</del>	52.45
22.0	13.6	14.0	2	16	100	TOHX 090204	<del>500.69</del>	52.45
23.5	15.1	15.5	2	16	100	TOHX 090204	<del>523.53</del>	52.45
25.5	17.1	17.5	2	16	100	TOHX 090204	<del>532.57</del>	52.45

### TOHX

KOMET \ Performance



ISO designation	L mm	S mm	D1 mm	IC mm	ISO	RE mm
TOHX 06T103EL	6.50	1.80	2.2	4.0	06T103EL	0.3
TOHX 090204EL	9.12	2.50	2.8	5.6	090204EL	0.4
TOHX 090204EN	9.12	2.50	2.8	5.6	090204EN	0.4
TOHX 140304EL	13.62	3.00	3.8	8.2	140304EL	0.4



62 603 ...	PG 1A/3#
£	£
31400	<del>26.70</del> 20.03



62 603 ...	PG 1A/3#
£	£
30200	<del>22.02</del> 17.19
31800	<del>26.03</del> 19.45
32600	<del>20.24</del> 21.92

P	●	●
M	●	●
K	●	●
N	○	○
S	●	●
H	○	○
O	○	○







## MaxiMill – Slot-SX slot milling and parting off cutter

**Scope of supply:**

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



CERATIZIT \ Performance

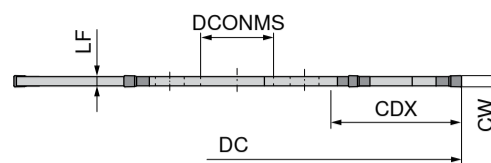

Designation	DC mm	CW mm	CDX mm	DCONMS <sub>H6</sub> mm	DHUB mm	OAL mm	ZEFP	Insert	Adapter
ASLOT.80.R.6.13.DC-SX2	80	2	23	13	32	2.675	6	SX E2 ..	AD.SLOT.13...
ASLOT.80.R.6.13.DC-SX3	80	3	23	13		2.750	6	SX E3 ..	AD.SLOT.13...
ASLOT.80.R.4.13.DC-SX4	80	4	23	13		3.750	4	SX E4 ..	AD.SLOT.13...
ASLOT.80.R.4.13.DC-SX5	80	5	23	13		4.750	4	SX E5 ..	AD.SLOT.13...

50 383 ...	PG 2B/40
08002	£ 614.07 / £ 76.58
08003	£ 614.07 / £ 76.58
08004	£ 614.07 / £ 76.58
08005	£ 614.07 / £ 76.58

**Spare parts**  
for Article no.

50 383 08002	26.23	836
50 383 08003	26.23	836
50 383 08004	26.23	837
50 383 08005	26.23	837




Ejector SX

70 950 ...	
£ 26.23	836
£ 26.23	836
£ 26.23	837
£ 26.23	837


## MaxiMill – Slot-SX slot milling and parting off cutter

**Scope of supply:**

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



CERATIZIT \ Performance

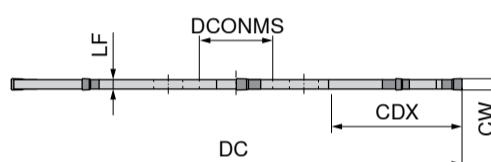

Designation	DC mm	CW mm	CDX mm	DCONMS <sub>H6</sub> mm	DHUB mm	OAL mm	ZEFP	Insert	Adapter
ASLOT.100.R.8.22.DC-SX2	100	2	29	22	40	2.675	8	SX E2 ..	AD.SLOT.22...
ASLOT.100.R.8.22.DC-SX3	100	3	29	22		2.750	8	SX E3 ..	AD.SLOT.22...
ASLOT.100.R.6.22.DC-SX4	100	4	29	22		3.750	6	SX E4 ..	AD.SLOT.22...
ASLOT.100.R.6.22.DC-SX5	100	5	29	22		4.750	6	SX E5 ..	AD.SLOT.22...
ASLOT.100.R.4.22.DC-SX6	100	6	29	22		5.700	4	SX E6 ..	AD.SLOT.22...

50 384 ...	PG 2B/40
10002	£ 818.75 / £ 101.75
10003	£ 818.75 / £ 101.75
10004	£ 818.75 / £ 101.75
10005	£ 818.75 / £ 101.75
10006	£ 818.75 / £ 101.75

**Spare parts**  
for Article no.

50 384 10002	26.23	836
50 384 10003	26.23	836
50 384 10004	26.23	837
50 384 10005	26.23	837
50 384 10006	26.23	837




Ejector SX

70 950 ...	
£ 26.23	836
£ 26.23	836
£ 26.23	837
£ 26.23	837


## MaxiMill – Slot-SX slot milling and parting off cutter

**Scope of supply:**

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



CERATIZIT \ Performance

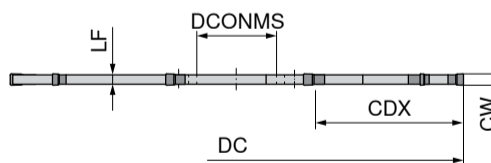

Designation	DC mm	CW mm	CDX mm	DCONMS <sub>H6</sub> mm	DHUB mm	OAL mm	ZEFP	Insert	Adapter
ASLOT.125.R.10.22.DC-SX2	125	2	42	22	40	2.675	10	SX E2 ..	AD.SLOT.22...
ASLOT.125.R.10.22.DC-SX3	125	3	42	22		2.750	10	SX E3 ..	AD.SLOT.22...

50 385 ...	PG 2B/40
12502	£ 1,023.47 / £ 126.93
12503	£ 1,023.47 / £ 126.93

**Spare parts**  
for Article no.

50 385 12502	26.23	836
50 385 12503	26.23	836



Ejector SX

70 950 ...	
£ 26.23	836
£ 26.23	836



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield


## MaxiMill – Slot-SX slot milling and parting off cutter

**Scope of supply:**

Slot milling and parting off cutters **without** assembly key, **without** clamping screws



CERATIZIT \ Performance

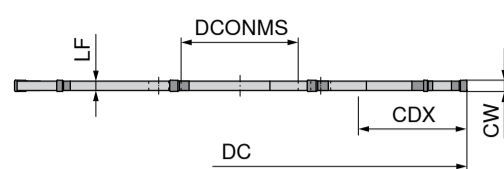

Designation	DC mm	CW mm	CDX mm	DCONMS <sub>H6</sub> mm	DHUB mm	OAL mm	ZEFP	Insert	Adapter
ASLOT.125.R.10.32.DC-SX2	125	2	30	32	63	2.675	10	SX E2 ..	AD.SLOT.32...
ASLOT.125.R.10.32.DC-SX3	125	3	30	32		2.750	10	SX E3 ..	AD.SLOT.32...
ASLOT.125.R.8.32.DC-SX4	125	4	30	32		3.750	8	SX E4 ..	AD.SLOT.32...
ASLOT.125.R.8.32.DC-SX5	125	5	30	32		4.750	8	SX E5 ..	AD.SLOT.32...
ASLOT.125.R.8.32.DC-SX6	125	6	30	32		5.700	8	SX E6 ..	AD.SLOT.32...

50 386 ...		PG 2B/40
£	£	
12502	<del>1,023.47</del>	126.93
12503	<del>1,023.47</del>	126.93
12504	<del>1,023.47</del>	126.93
12505	<del>1,023.47</del>	126.93
12506	<del>1,023.47</del>	126.93

**Spare parts**

for Article no.

- 50 386 12502
- 50 386 12503
- 50 386 12504
- 50 386 12505
- 50 386 12506



Ejector SX

**70 950 ...**

£	£
26.23	836
26.23	836
26.23	837
26.23	837
26.23	837



## MaxiMill – Slot-SX multipurpose milling cutter adapter

**Scope of supply:**

Multipurpose milling cutter adapter including screws



CERATIZIT \ Performance



Designation	DCONMS mm	DCONWS <sub>H6</sub> mm	LB mm	OAL mm	BD mm
AD.SLOT.13.32.A16	16	13	35	37.5	32
AD.SLOT.22.40.A22	22	22	35	37.5	40
AD.SLOT.32.63.A27	27	32	45	47.5	63
AD.SLOT.40.80.A32.SK	32	40	55	57.5	80
AD.SLOT.40.80.A32.ZK	32	40	55	57.5	80



50 395 ...		PG 2E/45
£	£	
01300	<del>191.68</del>	24.13
02200	<del>196.75</del>	24.13
03200	<del>211.88</del>	26.23
04000	<del>272.12</del>	33.57
04100	<del>272.12</del>	33.57

## Insert SX

▲ Specially developed geometry with negative edge-chamfers available in right, left and neutral types



CERATIZIT \ Performance



Designation	IH	CW <sub>+/-0,05</sub> mm	for tool holder
SX E2.00 N 0.20	N	2	-SX2
SX E3.00 N 0.20	N	3	-SX3
SX E4.00 N 0.30	N	4	-SX4
SX E5.00 N 0.30	N	5	-SX5
SX E6.00 N 0.40	N	6	-SX6

70 342 ...		PG 10/72
£	£	
622	<del>15.36</del>	11.51
623	<del>16.32</del>	12.24
624	<del>17.28</del>	12.92
625	<del>18.24</del>	13.74
626	<del>19.20</del>	14.81

P	●
M	●
K	●
N	○
S	●
H	●
O	○





# CLAMPING TECHNOLOGY



Centro-P – highest performance and accuracy for all milling and drilling applications.



VDI – Full range



Standard Line – range of tools to support all standard applications.



CentriClamp ZSG4 – High performance, cost effective workholding solution.



BT-FC – face and taper contact. For highest stability and process security in compatible machines.



HSK-A – Full range of HSK-A toolholding for multi-tasking lathes


## ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

### Scope of supply:

Holder without nut, without backstop

Centro-P WNT \ Performance



G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet	84 524 ... PG Y8	
	mm	mm	mm	mm	mm		£	£
BT 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	210	<del>186.01</del> 61.89
BT 40	1 - 10	90	30	120	30 - 50 (29 - 36)	426E (ER16)	310	<del>290.42</del> 72.38
BT 40	1 - 10	120	30	140	29 - 45 (29 - 35)	426E (ER16)	410	<del>388.44</del> 99.66
BT 40	1 - 10	150	30	180	29 - 45 (29 - 32)	426E (ER16)	510	<del>523.57</del> 107.00
BT 40	2 - 16	60	40	92	44 - 64 (36 - 46)	430E (ER25)	116	<del>211.65</del> 70.28
BT 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	216	<del>186.01</del> 61.89
BT 40	2 - 16	90	40	91	42 - 59 (36 - 41)	430E (ER25)	316	<del>288.42</del> 72.38
BT 40	2 - 16	120	40	91	40 - 65 (36 - 47)	430E (ER25)	416	<del>388.42</del> 107.00
BT 40	2 - 16	150	40	100	40 - 64 (36 - 45)	430E (ER25)	516	<del>523.57</del> 107.00
BT 40	2 - 16	200	40	150	40 - 64 (36 - 45)	430E (ER25)	616	<del>708.69</del> 132.17
BT 40	2 - 20	60	50	55	45 - 64 (42 - 46)	470E (ER32)	120	<del>211.65</del> 70.28
BT 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	220	<del>186.01</del> 61.89
BT 40	2 - 20	90	50	100	42 - 76 (42 - 52)	470E (ER32)	320	<del>288.42</del> 72.38
BT 40	2 - 20	120	50	110	42 - 71 (42 - 53)	470E (ER32)	420	<del>388.42</del> 107.00
BT 40	2 - 20	150	50	110	42 - 71 (42 - 53)	470E (ER32)	520	<del>523.57</del> 114.34

**i** LSCX = clamping depth without back stop screw for shanks  
 l<sub>2</sub> = with back stop screw 1, dimension in brackets ( ) = with back stop screw 2  
 dimension LPR when using tightening nuts with seals 4 mm longer

## Roll key



## ER standard lock nut for precision collet chucks – Centro-P

WNT \ Performance



WNT \ Performance




for lock nut	DLN	84 950 ... PG Y8		for collet	84 950 ... PG Y8	
	mm	£	£		£	£
426E / ER 16 CP	30	027	<del>145.89</del> 48.25	426E (ER16)	001	<del>72.00</del> 29.00
430E / ER 25 CP	40	054	<del>171.83</del> 56.65	430E (ER25)	003	<del>86.88</del> 32.00
470E / ER 32 CP + STD	50	056	<del>169.34</del> 53.50	470E (ER32)	005	<del>86.88</del> 35.00

## ER precision collet for precision collet chucks – Centro-P

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ 12 times slotted
- ▲ Double taper collet
- ▲ Coloured ring as identification of precision collet
- ▲ ER08: 5 µm runout and repeatability
- ▲ Coated precision collet

ER-B  
2 µm  
WNT \ Performance



DCONWS	BD = 17 OAL = 27.5 426 E / ER16		BD = 26 OAL = 34 430 E / ER25		BD = 33 OAL = 40 470 E / ER32	
	84 596 ... PG Y8	£	£	84 597 ... PG Y8	£	£
1.0	010	<del>119.54</del> 39.86				
1.1	011	<del>213.82</del> 70.28				
1.2	012	<del>213.82</del> 70.28				
1.4	014	<del>213.82</del> 70.28				
1.5	015	<del>145.89</del> 39.86				
1.6	016	<del>213.82</del> 70.28				
1.8	018	<del>213.82</del> 70.28				
2.0	020	<del>186.01</del> 33.57	020	<del>186.01</del> 34.62	020	<del>186.01</del> 35.67
2.2	022	<del>186.01</del> 62.94				
2.4	024	<del>186.01</del> 62.94				
2.5	025	<del>186.01</del> 33.57	025	<del>186.01</del> 34.62		
2.6	026	<del>186.01</del> 62.94				
2.8	028	<del>186.01</del> 62.94				
3.0	030	<del>86.49</del> 28.32	030	<del>86.49</del> 29.37	030	<del>86.49</del> 29.37
3.2	032	<del>168.19</del> 55.60				
3.4	034	<del>145.89</del> 49.30				
3.5	035	<del>145.89</del> 36.72	035	<del>115.35</del> 37.76		
3.6	036	<del>168.19</del> 55.60				
3.8	038	<del>168.19</del> 55.60				
4.0	040	<del>86.49</del> 28.32	040	<del>86.49</del> 29.37	040	<del>86.49</del> 29.37
4.5	045	<del>145.89</del> 36.72	045	<del>115.35</del> 37.76	045	<del>115.35</del> 37.76
5.0	050	<del>86.49</del> 28.32	050	<del>86.49</del> 29.37	050	<del>86.49</del> 29.37
5.5	055	<del>145.89</del> 36.72	055	<del>115.35</del> 37.76	055	<del>115.35</del> 37.76
5.6	056	<del>168.19</del> 55.60				
6.0	060	<del>86.49</del> 28.32	060	<del>86.49</del> 29.37	060	<del>86.49</del> 29.37
6.3	063	<del>168.19</del> 55.60				
6.5	065	<del>145.89</del> 36.72	065	<del>115.35</del> 37.76	065	<del>115.35</del> 37.76

**i** Clamping range covered: H10 corresponding to shank Ø DCONWS


## ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

### Scope of supply:

Holder without nut, without backstop


Centro-P WNT \ Performance



G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet	84 414 ... PG Y8	
	mm	mm	mm	mm	mm		£	£
SK 40	1 - 10	130	30	140	28 - 50 (14 - 34)	426E (ER16)	510	<del>384.86</del> 100.70
SK 40	1 - 10	160	30	200	28 - 45 (16 - 31)	426E (ER16)	910	<del>388.42</del> 111.19
SK 40	2 - 16	45	40	85	35 - 60 (20 - 42)	430E (ER25)	816	<del>276.86</del> 91.26
SK 40	2 - 16	130	40	140	38 - 67 (21 - 49)	430E (ER25)	516	<del>384.86</del> 109.10
SK 40	2 - 16	160	40	118	35 - 60 (20 - 42)	430E (ER25)	916	<del>384.86</del> 115.39
SK 40	2 - 20	130	50	114	50 - 74 (36 - 55)	470E (ER32)	620	<del>384.86</del> 109.10
SK 40	2 - 20	160	50	119	52 - 70 (32 - 52)	470E (ER32)	920	<del>384.86</del> 115.39
SK 50	2 - 20	100	50	150	53 - 81 (35 - 63)	470E (ER32)	520	<del>587.89</del> 187.77
SK 50	2 - 20	160	50	200	53 - 83 (35 - 65)	470E (ER32)	720	<del>923.74</del> 305.26

Centro-P WNT \ Performance



G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet	84 424 ... PG Y8	
	mm	mm	mm	mm	mm		£	£
SK 40	1 - 10	70	30	110	28 - 45 (16 - 31)	426E (ER16)	102	<del>244.82</del> 73.82
SK 40	1 - 10	100	30	140	28 - 45 (16 - 31)	426E (ER16)	103	<del>384.86</del> 82.04
SK 40	2 - 16	70	40	110	35 - 60 (20 - 42)	430E (ER25)	162	<del>286.23</del> 73.82
SK 40	2 - 16	100	40	113	35 - 60 (20 - 42)	430E (ER25)	163	<del>384.86</del> 82.04
SK 40	2 - 20	50	50	85	52 - 70 (26 - 52)	470E (ER32)	201	<del>287.62</del> 77.92
SK 40	2 - 20	70	50	111	55 - 75 (42 - 62)	470E (ER32)	202	<del>244.82</del> 73.82
SK 40	2 - 20	100	50	114	52 - 70 (32 - 52)	470E (ER32)	203	<del>384.86</del> 82.04
SK 40	3 - 26	70	63	105	48 - 55	472E (ER40)	261	<del>384.86</del> 98.42
SK 50	2 - 16	100	40	150	35 - 64 (20 - 48)	430E (ER25)	167	<del>565.05</del> 163.19

1) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change




## ER-Collet chuck

▲ also available with Balluff chip on request

### Scope of supply:


Holder with lock nut and adjustable back stop

WNT \ Standard



Version	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	82 743 ... PG Y8	
							£	£
short	BT 40	1 - 10	60	28	56	426E (ER16)	11069 <sup>1)</sup>	<del>417.72</del> 36.72
	BT 40	1 - 16	70	42	104	430E (ER25)	11669	<del>123.05</del> 38.81
	BT 40	2 - 20	70	50	136	470E (ER32)	12069	<del>123.43</del> 38.81
	BT 40	3 - 26	70	63	176	472E (ER40)	12669	<del>120.34</del> 40.91
medium length	BT 40	1 - 10	120	28	56	426E (ER16)	21069 <sup>1)</sup>	<del>120.00</del> 41.96
	BT 40	1 - 16	120	42	104	430E (ER25)	21669	<del>134.41</del> 41.96
	BT 40	2 - 20	120	50	136	470E (ER32)	22069	<del>134.78</del> 41.96

1) with 6 position lock nut



AD/B  
G 2,5 n<sub>max</sub> 25000

## Shell mill adapter


▲ With fixed drive dogs and enlarged contact face for milling cutters with transverse groove

▲ also available with Balluff chip on request

### Scope of supply:

Toolholder with clamping screw

WNT \ Standard

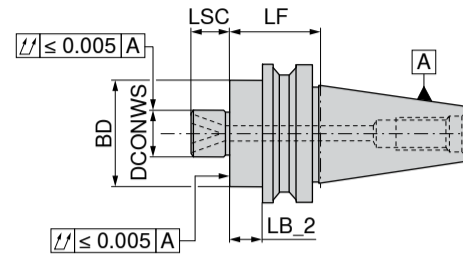

Version	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	82 745 ... PG Y8	
							£	£
short	BT 40	16	25	52	38	17	11669	<del>116.42</del> 48.25
	BT 40	22	25	52	48	19	12269	<del>123.23</del> 52.45
	BT 40	27	25	52	58	21	12769	<del>125.68</del> 52.45
	BT 40	32	23	50	78	24	13269	<del>132.34</del> 55.60
	BT 40	40	23	50	88	27	14069 <sup>1)</sup>	<del>143.06</del> 60.84

1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!




AD/B  
G 2,5 n<sub>max</sub> 25000

## Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat

▲ also available with Balluff chip on request

WNT \ Standard

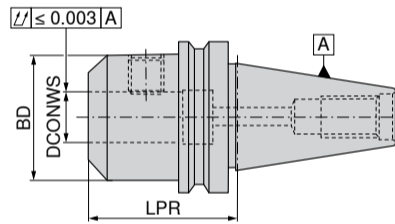

Version	Adapter	DCONWS <sup>1)</sup> mm	LPR mm	BD mm	82 740 ... PG Y8	
					£	£
short	BT 40	6	50	25	10669	<del>84.34</del> 36.72
	BT 40	8	50	28	10869	<del>84.34</del> 36.72
	BT 40	10	63	35	11069	<del>70.58</del> 36.72
	BT 40	12	63	42	11269	<del>70.58</del> 36.72
	BT 40	14	63	44	11469	<del>70.58</del> 36.72
	BT 40	16	63	48	11669	<del>86.16</del> 36.72
	BT 40	18	63	50	11869	<del>86.16</del> 36.72
	BT 40	20	63	52	12069	<del>86.16</del> 36.72
	BT 40	25	100	65	12569	<del>94.53</del> 36.72
	BT 40	32	100	72	13269 <sup>1)</sup>	<del>102.03</del> 41.96
medium length	BT 40	6	100	25	20669	<del>87.09</del> 39.86
	BT 40	8	100	28	20869	<del>87.09</del> 39.86
	BT 40	10	100	35	21069	<del>82.07</del> 39.86
	BT 40	12	100	42	21269	<del>82.07</del> 39.86
	BT 40	14	100	44	21469	<del>82.41</del> 39.86
	BT 40	16	100	48	21669	<del>94.12</del> 54.55
	BT 40	18	100	50	21869	<del>90.73</del> 39.86
	BT 40	20	100	52	22069	<del>94.12</del> 54.55
extra-long	BT 40	6	160	25	40669	<del>101.12</del> 41.96
	BT 40	8	160	28	40869	<del>101.12</del> 41.96
	BT 40	10	160	35	41069	<del>95.02</del> 41.96
	BT 40	12	160	42	41269	<del>95.82</del> 41.96
	BT 40	14	160	44	41469	<del>95.82</del> 41.96
	BT 40	16	160	48	41669	<del>96.20</del> 41.96
	BT 40	18	160	50	41869	<del>96.20</del> 41.96
	BT 40	20	160	52	42069	<del>96.20</del> 41.96
	BT 40	25	160	65	42569 <sup>1)</sup>	<del>102.83</del> 41.96

1) Version with two grub screws



NEW



AD/B  
G 2,5 n<sub>max</sub> 25000

Spare parts can be found in → Chapter 16 Adaptors and accessories in the clamping technology catalogue.



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield



## ER Collet chuck

▲ also available with Balluff chip on request

### Scope of supply:

Holder with lock nut and adjustable back stop

WNT \ Standard



AD/B  
G 2,5 n<sub>max</sub> 25000

Version	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	82 743 ... PG Y8	
							£	£
short	SK 40	1 - 10	60	28	56	426E (ER16)	11079 <sup>1)</sup>	<del>417.72</del> 36.72
	SK 40	1 - 16	70	42	104	430E (ER25)	11679	<del>423.05</del> 38.81
	SK 40	2 - 20	70	50	136	470E (ER32)	12079	<del>423.43</del> 38.81
	SK 40	3 - 26	70	63	176	472E (ER40)	12679	<del>428.34</del> 40.91
medium length	SK 40	1 - 10	120	28	56	426E (ER16)	21079 <sup>1)</sup>	<del>429.09</del> 41.96
	SK 40	1 - 16	120	42	104	430E (ER25)	21679	<del>434.41</del> 41.96
	SK 40	2 - 20	120	50	136	470E (ER32)	22079	<del>434.78</del> 41.96


1) with 6 position lock nut

## Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat

▲ also available with Balluff chip on request

WNT \ Standard

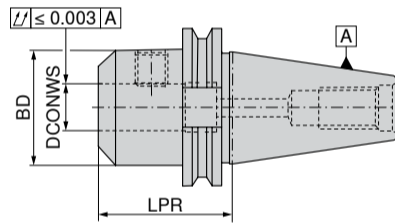

NEW



AD/B  
G 2,5 n<sub>max</sub> 25000

Version	Adapter	DCONWS <sup>1)</sup> mm	LPR mm	BD mm	82 740 ... PG Y8	
					£	£
short	SK 40	6	50	25	10679	<del>84.34</del> 36.72
	SK 40	8	50	28	10879	<del>84.34</del> 36.72
	SK 40	10	50	35	11079	<del>79.58</del> 36.72
	SK 40	12	50	42	11279	<del>79.58</del> 36.72
	SK 40	14	50	44	11479	<del>79.58</del> 36.72
	SK 40	16	63	48	11679	<del>86.16</del> 36.72
	SK 40	18	63	50	11879	<del>86.16</del> 36.72
	SK 40	20	63	52	12079	<del>86.16</del> 36.72
	SK 40	25	100	65	12579 <sup>1)</sup>	<del>94.53</del> 36.72
	SK 40	32	100	72	13279 <sup>1)</sup>	<del>102.03</del> 41.96
medium length	SK 40	6	100	25	20679	<del>87.09</del> 39.86
	SK 40	8	100	28	20879	<del>87.09</del> 39.86
	SK 40	10	100	35	21079	<del>82.07</del> 39.86
	SK 40	12	100	42	21279	<del>82.07</del> 39.86
	SK 40	14	100	44	21479	<del>82.41</del> 39.86
	SK 40	16	100	48	21679	<del>94.12</del> 54.55
	SK 40	18	100	50	21879	<del>90.73</del> 39.86
	SK 40	20	100	52	22079	<del>94.12</del> 54.55
extra-long	SK 40	6	160	25	40679	<del>104.12</del> 41.96
	SK 40	8	160	28	40879	<del>104.12</del> 41.96
	SK 40	10	160	35	41079	<del>95.02</del> 41.96
	SK 40	12	160	42	41279	<del>95.82</del> 41.96
	SK 40	14	160	44	41479	<del>95.82</del> 41.96
	SK 40	16	160	48	41679	<del>96.20</del> 41.96
	SK 40	18	160	50	41879	<del>96.20</del> 41.96
	SK 40	20	160	52	42079	<del>96.20</del> 41.96
SK 40	25	160	65	42579 <sup>1)</sup>	<del>102.83</del> 41.96	

1) Version with two grub screws


Spare parts can be found in → Chapter 16 Adaptors and accessories in the clamping technology catalogue.



### Cylindrical shank adapter (Weldon) – BT-FC

- ▲ with face contact
- ▲ for shanks according to DIN 6535 / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

WNT \ Standard

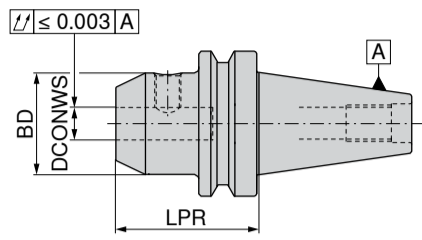

G 2,5 n<sub>max</sub> 25000

Version	Adapter	DCONWS <sub>1/4</sub> mm	LPR mm	BD mm	84 552 ... PG Y8		
					£	£	
short	BT-FC 30	6	50	25	006	<del>140.14</del>	46.16
	BT-FC 30	8	50	28	008	<del>140.14</del>	46.16
	BT-FC 30	10	50	35	010	<del>140.14</del>	46.16
	BT-FC 30	12	50	42	012	<del>140.14</del>	46.16
	BT-FC 30	16	63	48	016	<del>150.36</del>	49.30
	BT-FC 30	20	63	52	020	<del>150.36</del>	49.30
	BT-FC 40	6	50	25	106	<del>177.60</del>	58.74
	BT-FC 40	8	50	28	108	<del>171.84</del>	56.65
	BT-FC 40	10	63	35	110	<del>171.84</del>	56.65
	BT-FC 40	12	63	42	112	<del>171.84</del>	56.65
	BT-FC 40	16	63	48	116	<del>171.84</del>	56.65
	BT-FC 40	20	63	52	120	<del>171.84</del>	56.65
	BT-FC 40	25	90	65	125 <sup>1)</sup>	<del>220.45</del>	75.53
	BT-FC 40	32	100	72	132 <sup>1)</sup>	<del>220.45</del>	75.53
	BT-FC 50	6	63	25	306	<del>260.59</del>	87.07
	BT-FC 50	8	63	28	308	<del>255.80</del>	84.97
	BT-FC 50	10	63	35	310	<del>255.80</del>	84.97
	BT-FC 50	12	80	42	312	<del>255.80</del>	84.97
	BT-FC 50	16	80	48	316	<del>255.80</del>	84.97
	BT-FC 50	20	80	52	320	<del>255.80</del>	84.97
BT-FC 50	25	100	65	325 <sup>1)</sup>	<del>292.84</del>	96.51	
BT-FC 50	32	105	72	332 <sup>1)</sup>	<del>292.84</del>	96.51	


1) Version with two grub screws

### ER Collet chuck – BT-FC

- ▲ with face contact
- ▲ also available with Balluff chip **on request**

Scope of supply:  
Toolholder including nut

WNT \ Standard

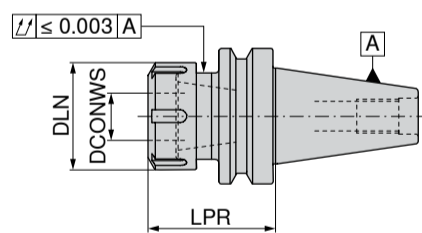

G 2,5 n<sub>max</sub> 20000

Version	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	84 557 ... PG Y8		
							£	£	
short	BT-FC 30	1 - 10	63	28	56	426E (ER16)	010 <sup>1)</sup>	<del>158.15</del>	52.45
	BT-FC 30	1 - 16	60	42	104	430E (ER25)	016	<del>158.15</del>	52.45
	BT-FC 30	2 - 20	60	50	136	470E (ER32)	020	<del>158.15</del>	52.45
	BT-FC 40	1 - 10	63	28	56	426E (ER16)	110 <sup>1)</sup>	<del>199.21</del>	66.09
	BT-FC 40	1 - 16	60	42	104	430E (ER25)	116	<del>199.21</del>	66.09
	BT-FC 40	2 - 20	60	50	136	470E (ER32)	120	<del>199.21</del>	66.09
	BT-FC 50	1 - 16	70	42	104	430E (ER25)	316	<del>271.38</del>	90.21
	BT-FC 50	2 - 20	70	50	136	470E (ER32)	320	<del>271.38</del>	90.21
medium length	BT-FC 50	1 - 10	100	28	56	426E (ER16)	310 <sup>1)</sup>	<del>271.38</del>	90.21


1) with 6 position lock nut

ⓘ Spare parts can be found in → Chapter 16 Adaptors and accessories in the clamping technology catalogue.

### Shell mill adapter – BT-FC

- ▲ with face contact
- ▲ with fixed drive dogs and enlarged contact face for milling cutters with transverse slot
- ▲ also available with Balluff chip **on request**

WNT \ Standard

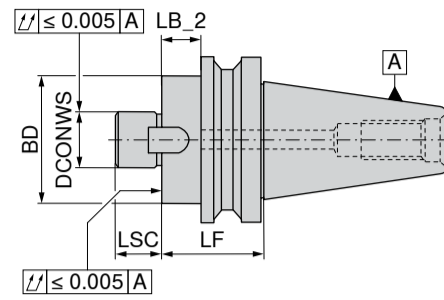

G 6,3 n<sub>max</sub> 15000

Version	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	84 562 ... PG Y8		
							£	£	
short	BT-FC 30	16	18	39.0	40	17	016	<del>154.27</del>	51.40
	BT-FC 30	22	18	39.0	50	19	022	<del>154.27</del>	51.40
	BT-FC 30	27	18	39.0	60	21	027	<del>154.27</del>	51.40
	BT-FC 30	32	28	49.0	80	24	032	<del>154.27</del>	51.40
	BT-FC 40	16	8	34.0	40	17	116	<del>185.51</del>	60.84
	BT-FC 40	22	8	34.0	50	19	122	<del>185.51</del>	60.84
	BT-FC 40	27	8	34.0	60	21	127	<del>185.51</del>	60.84
	BT-FC 40	32	23	49.0	80	24	132	<del>185.51</del>	60.84
	BT-FC 40	40	23	49.0	89	27	140	<del>185.51</del>	60.84
	BT-FC 50	22	12	48.5	50	19	322	<del>214.75</del>	71.33
	BT-FC 50	27	12	48.5	60	21	327	<del>214.75</del>	71.33
	BT-FC 50	32	12	48.5	80	24	332	<del>220.45</del>	75.53
	BT-FC 50	40	17	53.5	89	27	340	<del>220.45</del>	75.53


### ER Precision Collet chuck – Centro-P – BT-FC

- ▲ with face contact
- ▲ for standard or sealed nuts
- ▲ maximum clamping range covered according to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲ p<sub>max</sub> = 80 bar
- ▲ also available with Balluff chip **on request**

Scope of supply:

Holder **without** nut, **without** backstop

Centro-P WNT \ Performance

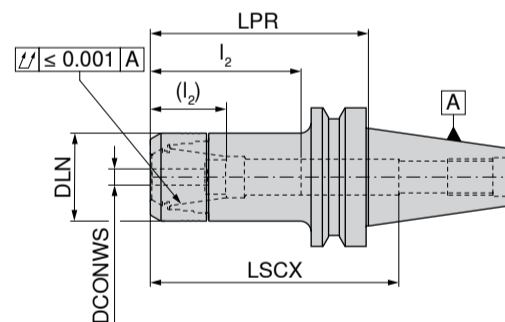

G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS mm	LPR mm	BD mm	LSCX mm	l <sub>2</sub> (l <sub>2</sub> ) mm	for collet	84 525 ... PG Y8		
							£	£	
BT-FC 30	1 - 10	75	30	97	28 - 45 (14 - 31)	426E (ER16)	002	<del>302.64</del>	107.00
BT-FC 30	2 - 16	75	40	72	38 - 56 (23 - 39)	430E (ER25)	012	<del>327.25</del>	108.05
BT-FC 30	2 - 20	75	45	84	42 - 62 (24 - 45)	470E (ER32)	022	<del>327.25</del>	108.05
BT-FC 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	102	<del>359.51</del>	118.54
BT-FC 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	112	<del>364.13</del>	120.64
BT-FC 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	122	<del>364.13</del>	120.64

ⓘ LSCX = clamping depth without back stop screw for shanks  
l<sub>2</sub> = with back stop screw 1, dimension in brackets ( ) = with back stop screw 2  
dimension LPR when using tightening nuts with seals 4 mm longer



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield


## ER precision collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

WNT \ Performance

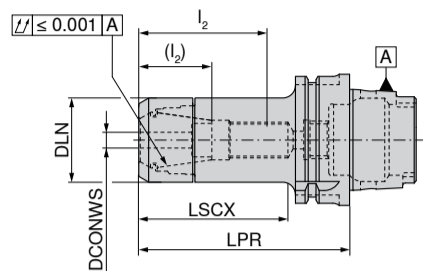

AD  
G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet
	mm	mm	mm	mm	mm	
HSK-A 50	2 - 16	60	40	37		430E (ER25)
HSK-A 50	2 - 16	70	40	49	34 - 35	430E (ER25)
HSK-A 63	1 - 10	55	30	32		426E (ER16)
HSK-A 63	1 - 10	100	30	71	28 - 45 (16 - 31)	426E (ER16)
HSK-A 63	1 - 10	130	30	87	26 - 50 (17 - 38)	426E (ER16)
HSK-A 63	1 - 10	160	30	106	28 - 45 (16 - 31)	426E (ER16)
HSK-A 63	1 - 10	200	30	136	28 - 45 (16 - 31)	426E (ER16)
HSK-A 63	2 - 16	60	40	37		430E (ER25)
HSK-A 63	2 - 16	100	40	70	35 - 55 (24 - 37)	430E (ER25)
HSK-A 63	2 - 16	130	40	89	37 - 60 (12 - 42)	430E (ER25)
HSK-A 63	2 - 16	160	40	128	35 - 60 (24 - 42)	430E (ER25)
HSK-A 63	2 - 20	70	50	46		470E (ER32)
HSK-A 63	2 - 20	100	50	71	41 - 57 (26 - 39)	470E (ER32)
HSK-A 63	2 - 20	130	50	101	42 - 69 (18 - 41)	470E (ER32)
HSK-A 63	2 - 20	160	50	129	52 - 70 (26 - 60)	470E (ER32)
HSK-A 63	3 - 26	80	63	56		472E (ER40)
HSK-A 63	3 - 26	120	63	91		472E (ER40)

84 722 ...	PG	Y8
£	£	
504 <sup>1)</sup>	<del>374.31</del>	112.30
505	<del>374.31</del>	112.30
609 <sup>1)</sup>	<del>361.66</del>	108.50
610	<del>361.66</del>	105.60
613	<del>466.44</del>	121.60
611	<del>427.00</del>	128.30
612	<del>723.15</del>	216.90
615	<del>361.66</del>	108.50
616	<del>361.66</del>	105.60
619	<del>436.60</del>	131.00
617	<del>449.52</del>	134.90
620	<del>361.66</del>	105.60
621	<del>361.66</del>	105.60
625	<del>436.60</del>	131.00
622	<del>449.52</del>	134.90
626 <sup>2)</sup>	<del>452.04</del>	135.60
62700	<del>373.17</del>	112.00

- 1) Item cannot be combined with backstop screw
- 2) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change

**i** LSCX = clamping depth without back stop screw for shanks  
 l<sub>2</sub> = with back stop screw 1, dimension in brackets ( ) = with back stop screw 2  
 dimension LPR when using tightening nuts with seals 4 mm longer


## ER precision collet chuck, slim – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

WNT \ Performance

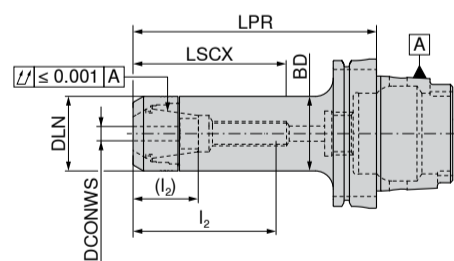

AD  
G 2,5 n<sub>max</sub> 25000

Adapter	DCONWS	LPR	BD	DLN	LSCX	l <sub>2</sub> (l <sub>2</sub> )	for collet
	mm	mm	mm	mm	mm	mm	
HSK-A 50	1 - 7	130	16	16	60	15 - 32 (7 - 22)	4008E (ER11)
HSK-A 63	1 - 10	70	22	22	46	27 - 34 (14 - 20)	426E (ER16)
HSK-A 63	1 - 10	100	22	22	62	27 - 44 (14 - 30)	426E (ER16)
HSK-A 63	1 - 10	130	22	22	87	27 - 52 (14 - 38)	426E (ER16)
HSK-A 63	1 - 10	160	22	22	97	27 - 52 (14 - 38)	426E (ER16)
HSK-A 63	1 - 7	70	16	16	48	15 - 32 (7 - 22)	4008E (ER11)
HSK-A 63	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)
HSK-A 63	1 - 7	130	16	16	108	15 - 32 (7 - 22)	4008E (ER11)
HSK-A 63	1 - 7	160	16	16	68	18 - 36 (12 - 26)	4008E (ER11)

84 719 ...	PG	Y8
£	£	
407	<del>467.02</del>	140.40
610	<del>358.62</del>	107.60
710	<del>358.62</del>	107.60
810	<del>461.66</del>	138.50
910	<del>461.66</del>	138.50
507	<del>358.62</del>	107.60
607	<del>374.03</del>	112.50
707	<del>461.66</del>	138.50
608	<del>488.71</del>	146.60

**i** LSCX = clamping depth without back stop screw for shanks  
 l<sub>2</sub> = with back stop screw 1, dimension in brackets ( ) = with back stop screw 2  
 dimension LPR when using tightening nuts with seals 4 mm longer






### ER Collet chuck

▲ also available with Balluff chip on request

**Scope of supply:**

Toolholder including nut

WNT \ Standard



AD  
G 2,5 n<sub>max</sub> 25000

Version	Adapter	DCONWS	LPR	DLN	TQX	for collet	82 743 ... PG Y8/3B	
		mm	mm	mm	Nm		£	£
medium length	HSK-A 63	1 - 10	100	22	56	426E (ER16 mini)	21157	<del>295.47</del> 61.60
	HSK-A 63	1 - 10	100	32	56	426E (ER16)	21057	<del>176.16</del> 52.80
	HSK-A 63	1 - 16	100	42	104	430E (ER25)	21657	<del>176.16</del> 52.80
	HSK-A 63	2 - 20	100	50	136	470E (ER32)	22057	<del>176.16</del> 52.80
	HSK-A 63	3 - 26	100	63	176	472E (ER40)	22657	<del>176.16</del> 52.80
extra-long	HSK-A 63	1 - 10	160	22	56	426E (ER16 mini)	41157	<del>295.47</del> 61.60
	HSK-A 63	1 - 10	160	32	56	426E (ER16)	41057	<del>247.77</del> 74.30
	HSK-A 63	1 - 16	160	42	104	430E (ER25)	41657	<del>247.77</del> 74.30
	HSK-A 63	2 - 20	160	50	136	470E (ER32)	42057	<del>247.77</del> 74.30
	HSK-A 63	3 - 26	160	63	176	472E (ER40)	42657	<del>247.77</del> 74.30


### Shell mill adapter with reduced flange diameter

▲ Screwed drive dogs  
▲ also available with Balluff chip on request

**Scope of supply:**

Base body with retaining screw and drive dog

WNT \ Standard




AD  
G 2,5 n<sub>max</sub> 25000

Version	Adapter	DCONWS	LB_2	LF	BD	LSC	82 315 ... PG Y8/3B	
		mm	mm	mm	mm	mm	£	£
short	HSK-A 63	22	34	60	38	19	12257	<del>258.15</del> 77.40
	HSK-A 63	27	34	60	48	21	12757	<del>258.15</del> 77.40

### Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat  
▲ also available with Balluff chip on request

WNT \ Standard

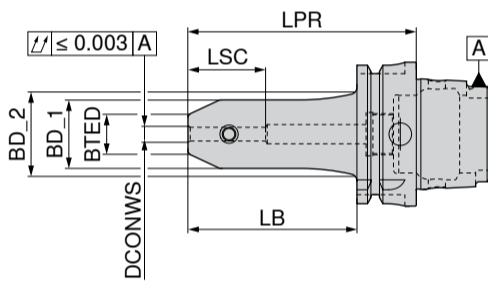

Version	Adapter	DCONWS <sub>HS</sub>	LPR	BTED	BD_1	BD_2	LB	LSC	AD - 2KMB G 2,5 n <sub>max</sub> 25000		AD G 2,5 n <sub>max</sub> 25000	
									82 740 ... PG Y8/3B	82 741 ... PG Y8/3B	£	£
short	HSK-A 63	6	65	17	30		39	34	10657	<del>213.70</del> 64.10	10657	<del>162.64</del> 48.80
	HSK-A 63	8	65	20	32		39	34	10857	<del>213.70</del> 64.10	10857	<del>162.64</del> 48.80
	HSK-A 63	10	65	25	35		39	39	11057	<del>213.70</del> 64.10	11057	<del>162.64</del> 48.80
	HSK-A 63	12	80	30	42		54	44	11257	<del>213.70</del> 64.10	11257	<del>162.64</del> 48.80
	HSK-A 63	14	80	32	45		54	44	11457	<del>213.70</del> 64.10	11457	<del>162.64</del> 48.80
	HSK-A 63	16	80	36	48		54	47	11657	<del>213.70</del> 64.10	11657	<del>162.64</del> 48.80
	HSK-A 63	18	80	38	48		54	47	11857	<del>213.70</del> 64.10	11857	<del>162.64</del> 48.80
	HSK-A 63	20	80	40	52		54	49	12057	<del>213.70</del> 64.10	12057	<del>162.64</del> 48.80
	HSK-A 63	25	110	45	63		84	54	12557 <sup>1)</sup>	<del>213.70</del> 64.10	12557 <sup>1)</sup>	<del>162.64</del> 48.80
	HSK-A 63	32	110	52	72		84	58	13257 <sup>1)</sup>	<del>213.70</del> 64.10	13257 <sup>1)</sup>	<del>162.64</del> 48.80
	HSK-A 100	6	80	17	30		51	34	10655	<del>286.59</del> 86.00	10655	<del>250.06</del> 75.00
	HSK-A 100	8	80	20	32		51	34	10855	<del>286.59</del> 86.00	10855	<del>250.06</del> 75.00
	HSK-A 100	10	80	25	35		51	39	11055	<del>286.59</del> 86.00	11055	<del>250.06</del> 75.00
	HSK-A 100	12	80	30	42		51	44	11255	<del>286.59</del> 86.00	11255	<del>250.06</del> 75.00
HSK-A 100	14	80	32	45		51	44	11455	<del>286.59</del> 86.00	11455	<del>250.06</del> 75.00	
HSK-A 100	16	100	36	48		71	47	11655	<del>286.59</del> 86.00	11655	<del>250.06</del> 75.00	
HSK-A 100	18	100	38	48		71	47	11855	<del>286.59</del> 86.00	11855	<del>250.06</del> 75.00	
HSK-A 100	20	100	40	52		71	49	12055	<del>286.59</del> 86.00	12055	<del>250.06</del> 75.00	
HSK-A 100	25	100	45	65		71	54	12555 <sup>1)</sup>	<del>286.59</del> 86.00	12555 <sup>1)</sup>	<del>250.06</del> 75.00	
HSK-A 100	32	100	52	72		71	58	13255 <sup>1)</sup>	<del>286.59</del> 86.00	13255 <sup>1)</sup>	<del>250.06</del> 75.00	
HSK-A 100	40	110	60	80		81	68	14055 <sup>1)</sup>	<del>286.59</del> 86.00	14055 <sup>1)</sup>	<del>250.06</del> 75.00	
medium length	HSK-A 63	6	100	17	30	36.2	74	34	20657	<del>233.69</del> 70.10	20657	<del>186.68</del> 56.00
	HSK-A 63	8	100	20	32	38.2	74	34	20857	<del>233.69</del> 70.10	20857	<del>186.68</del> 56.00
	HSK-A 63	10	100	25	35	41.2	74	39	21057	<del>233.69</del> 70.10	21057	<del>186.68</del> 56.00
	HSK-A 63	12	100	30	42		74	44	21257	<del>233.69</del> 70.10	21257	<del>186.68</del> 56.00
	HSK-A 63	14	100	32	45		74	44	21457	<del>233.69</del> 70.10	21457	<del>186.68</del> 56.00
	HSK-A 63	16	100	36	48		74	47	21657	<del>233.69</del> 70.10	21657	<del>186.68</del> 56.00
	HSK-A 63	18	100	38	48		74	47	21857	<del>233.69</del> 70.10	21857	<del>186.68</del> 56.00
	HSK-A 63	20	100	40	52		74	49	22057	<del>233.69</del> 70.10	22057	<del>186.68</del> 56.00
long	HSK-A 63	6	130	17	30	36.2	104	34	30657	<del>249.67</del> 74.90	30657	<del>205.74</del> 61.70
	HSK-A 63	8	130	20	32	38.2	104	34	30857	<del>249.67</del> 74.90	30857	<del>205.74</del> 61.70
	HSK-A 63	10	130	25	35	41.2	104	39	31057	<del>249.67</del> 74.90	31057	<del>205.74</del> 61.70
	HSK-A 63	12	130	30	42	48.2	104	44	31257	<del>249.67</del> 74.90	31257	<del>205.74</del> 61.70
	HSK-A 63	14	130	32	45	50.5	104	44	31457	<del>249.67</del> 74.90	31457	<del>205.74</del> 61.70
	HSK-A 63	16	130	36	48	50.1	104	47	31657	<del>249.67</del> 74.90	31657	<del>205.74</del> 61.70
	HSK-A 63	18	130	38	48	50.1	104	47	31857	<del>249.67</del> 74.90	31857	<del>205.74</del> 61.70
	HSK-A 63	20	130	40	52		104	49	32057	<del>249.67</del> 74.90	32057	<del>205.74</del> 61.70
	HSK-A 63	25	130	45	63		104	54	32557 <sup>1)</sup>	<del>249.67</del> 74.90	32557 <sup>1)</sup>	<del>205.74</del> 61.70
	HSK-A 63	32	130	52	72		104	58	33257 <sup>1)</sup>	<del>249.67</del> 74.90	33257 <sup>1)</sup>	<del>205.74</del> 61.70

1) Version with two grubscrews



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

### Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat  
▲ also available with Balluff chip on request

WNT \ Standard

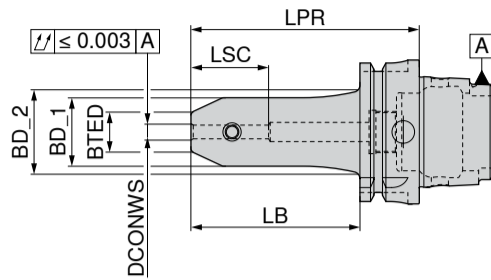

Version	Adapter	DCONWS <sub>HS</sub> mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB mm	LSC mm
extra-long	HSK-A 100	6	160	17	30	38.2	131	34
	HSK-A 100	8	160	20	32	40.2	131	34
	HSK-A 100	10	160	25	35	43.2	131	39
	HSK-A 100	12	160	30	42	50.2	131	44
	HSK-A 100	14	160	32	45	53.2	131	44
	HSK-A 100	16	160	36	48	56.2	131	47
	HSK-A 100	18	160	38	48	56.2	131	47
	HSK-A 100	20	160	40	52	60.2	131	49
	HSK-A 100	25	160	45	65	73.2	131	54
	HSK-A 100	32	160	52	72	79.5	134	58
	HSK-A 63	6	160	17	30	36.2	134	34
	HSK-A 63	8	160	20	32	38.2	134	34
	HSK-A 63	10	160	25	35	41.2	134	39
	HSK-A 63	12	160	30	42	48.2	134	44
	HSK-A 63	14	160	32	45	50.5	134	44
	HSK-A 63	16	160	36	48	50.1	134	47
	HSK-A 63	18	160	38	48	50.1	134	47
	HSK-A 63	20	160	40	52		134	49
HSK-A 63	25	160	45	63		134	54	



82 740 ... PG Y8/3B		82 741 ... PG Y8/3B	
£	£	£	£
40655	<del>349.78</del> 122.00	40655	<del>325.09</del> 114.00
40855	<del>349.78</del> 122.00	40855	<del>325.09</del> 114.00
41055	<del>349.78</del> 122.00	41055	<del>325.09</del> 114.00
41255	<del>349.78</del> 122.00	41255	<del>325.09</del> 114.00
41455	<del>349.78</del> 122.00	41455	<del>325.09</del> 114.00
41655	<del>349.78</del> 122.00	41655	<del>325.09</del> 114.00
41855	<del>349.78</del> 122.00	41855	<del>325.09</del> 114.00
42055	<del>349.78</del> 122.00	42055	<del>325.09</del> 114.00
42555 <sup>1)</sup>	<del>349.78</del> 122.00	42555 <sup>1)</sup>	<del>325.09</del> 114.00
43255 <sup>1)</sup>	<del>349.78</del> 122.00	43255 <sup>1)</sup>	<del>325.09</del> 114.00
40657	<del>265.65</del> 93.00	40657	<del>224.04</del> 79.00
40857	<del>265.65</del> 93.00	40857	<del>224.04</del> 79.00
41057	<del>265.65</del> 93.00	41057	<del>224.04</del> 79.00
41257	<del>265.65</del> 93.00	41257	<del>224.04</del> 79.00
41457	<del>265.65</del> 93.00	41457	<del>224.04</del> 79.00
41657	<del>265.65</del> 93.00	41657	<del>224.04</del> 79.00
41857	<del>265.65</del> 93.00	41857	<del>224.04</del> 79.00
42057	<del>265.65</del> 93.00	42057	<del>224.04</del> 79.00
42557 <sup>1)</sup>	<del>265.65</del> 93.00	42557 <sup>1)</sup>	<del>224.04</del> 79.00

1) Version with two grub screws

# The Catalogue 2024

## Clamping Technology



cutting.tools/gb/en/e-shelf



## ER precision collet

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ Double taper collet
- ▲ 16 times slotted

ER-B  
20 µm WNT \ Standard



DCONWS mm	UKS		UKS		UKS		UKS		UKS	
	BD	OAL	BD	OAL	BD	OAL	BD	OAL	BD	OAL
	17	27.5	21	31.5	26	34	33	40	41	46
	426 E / ER16		428 E / ER20		430 E / ER25		470 E / ER32		472 E / ER40	
	82 687 ... PG Y8		82 688 ... PG Y8		82 689 ... PG Y8		82 690 ... PG Y8		82 691 ... PG Y8	
	£	£	£	£	£	£	£	£	£	£
1	01000	<del>30.59</del> 11.54	01000	<del>34.62</del> 10.49	02000	<del>32.83</del> 11.54				
2	02000	<del>30.59</del> 11.54	02000	<del>34.62</del> 10.49	03000	<del>24.64</del> 7.34	03000	<del>26.53</del> 8.39	03000	<del>33.48</del> 10.49
3	03000	<del>24.67</del> 9.44	03000	<del>22.99</del> 7.34	04000	<del>24.64</del> 7.34	04000	<del>26.53</del> 8.39	04000	<del>33.48</del> 10.49
4	04000	<del>24.67</del> 9.44	04000	<del>22.99</del> 7.34	05000	<del>24.64</del> 7.34	05000	<del>26.53</del> 8.39	05000	<del>33.48</del> 10.49
5	05000	<del>24.67</del> 9.44	05000	<del>22.99</del> 7.34	06000	<del>24.64</del> 7.34	06000	<del>26.53</del> 8.39	06000	<del>33.48</del> 10.49
6	06000	<del>24.67</del> 9.44	06000	<del>22.99</del> 7.34	07000	<del>24.64</del> 7.34	07000	<del>26.53</del> 8.39	07000	<del>33.48</del> 10.49
7	07000	<del>24.67</del> 9.44	07000	<del>22.99</del> 7.34	08000	<del>24.64</del> 7.34	08000	<del>26.53</del> 8.39	08000	<del>33.48</del> 10.49
8	08000	<del>24.67</del> 9.44	08000	<del>22.99</del> 7.34	09000	<del>24.64</del> 7.34	09000	<del>26.53</del> 8.39	09000	<del>33.48</del> 10.49
9	09000	<del>24.67</del> 9.44	09000	<del>22.99</del> 7.34	10000	<del>24.64</del> 7.34	10000	<del>26.53</del> 8.39	10000	<del>33.48</del> 10.49
10	10000	<del>24.67</del> 9.44	10000	<del>22.99</del> 7.34	11000	<del>24.64</del> 7.34	11000	<del>26.53</del> 8.39	11000	<del>33.48</del> 10.49
11			11000	<del>22.99</del> 7.34	12000	<del>24.64</del> 7.34	12000	<del>26.53</del> 8.39	12000	<del>33.48</del> 10.49
12			12000	<del>22.99</del> 7.34	13000	<del>24.64</del> 7.34	13000	<del>26.53</del> 8.39	13000	<del>33.48</del> 10.49
13			13000	<del>22.99</del> 7.34	14000	<del>24.64</del> 7.34	14000	<del>26.53</del> 8.39	14000	<del>33.48</del> 10.49
14					15000	<del>24.64</del> 7.34	15000	<del>26.53</del> 8.39	15000	<del>33.48</del> 10.49
15					16000	<del>24.64</del> 7.34	16000	<del>26.53</del> 8.39	16000	<del>33.48</del> 10.49
16							17000	<del>26.53</del> 8.39	17000	<del>33.48</del> 10.49
17							18000	<del>26.53</del> 8.39	18000	<del>33.48</del> 10.49
18							19000	<del>26.53</del> 8.39	19000	<del>33.48</del> 10.49
19							20000	<del>26.53</del> 8.39	20000	<del>33.48</del> 10.49
20									21000	<del>33.48</del> 10.49
21									22000	<del>33.48</del> 10.49
22									23000	<del>33.48</del> 10.49
23									24000	<del>33.48</del> 10.49
24									25000	<del>33.48</del> 10.49
25									26000	<del>33.48</del> 10.49
26										

### Collet Set

Scope of supply

- 82 687 01000 DCONWS 1,0
- 82 687 02000 DCONWS 2,0
- 82 687 03000 DCONWS 3,0
- 82 687 04000 DCONWS 4,0
- 82 687 05000 DCONWS 5,0
- 82 687 06000 DCONWS 6,0
- 82 687 07000 DCONWS 7,0
- 82 687 08000 DCONWS 8,0
- 82 687 09000 DCONWS 9,0
- 82 687 10000 DCONWS 10,0



UKS

Set	BD mm	OAL mm	82 687 ... PG Y8
426 E / ER16	17	27.5	99900 <del>275.43</del> 147.91

### Collet Set

Scope of supply

- 82 688 01000 DCONWS 1,0
- 82 688 02000 DCONWS 2,0
- 82 688 03000 DCONWS 3,0
- 82 688 04000 DCONWS 4,0
- 82 688 05000 DCONWS 5,0
- 82 688 06000 DCONWS 6,0
- 82 688 07000 DCONWS 7,0
- 82 688 08000 DCONWS 8,0
- 82 688 09000 DCONWS 9,0
- 82 688 10000 DCONWS 10,0
- 82 688 11000 DCONWS 11,0
- 82 688 12000 DCONWS 12,0
- 82 688 13000 DCONWS 13,0



UKS

Set	BD mm	OAL mm	82 688 ... PG Y8
428 E / ER20	21	31.5	99900 <del>295.76</del> 147.91

### Collet Set

Scope of supply

- 82 689 02000 DCONWS 2,0
- 82 689 03000 DCONWS 3,0
- 82 689 04000 DCONWS 4,0
- 82 689 05000 DCONWS 5,0
- 82 689 06000 DCONWS 6,0
- 82 689 07000 DCONWS 7,0
- 82 689 08000 DCONWS 8,0
- 82 689 09000 DCONWS 9,0
- 82 689 10000 DCONWS 10,0
- 82 689 11000 DCONWS 11,0
- 82 689 12000 DCONWS 12,0
- 82 689 13000 DCONWS 13,0
- 82 689 14000 DCONWS 14,0
- 82 689 15000 DCONWS 15,0
- 82 689 16000 DCONWS 16,0



UKS

Set	BD mm	OAL mm	82 689 ... PG Y8
430 E / ER25	26	34	99900 <del>388.42</del> 147.91

### Collet Set

Scope of supply

- 82 690 03000 DCONWS 3,0
- 82 690 04000 DCONWS 4,0
- 82 690 05000 DCONWS 5,0
- 82 690 06000 DCONWS 6,0
- 82 690 07000 DCONWS 7,0
- 82 690 08000 DCONWS 8,0
- 82 690 09000 DCONWS 9,0
- 82 690 10000 DCONWS 10,0
- 82 690 11000 DCONWS 11,0
- 82 690 12000 DCONWS 12,0
- 82 690 13000 DCONWS 13,0
- 82 690 14000 DCONWS 14,0
- 82 690 15000 DCONWS 15,0
- 82 690 16000 DCONWS 16,0
- 82 690 17000 DCONWS 17,0
- 82 690 18000 DCONWS 18,0
- 82 690 19000 DCONWS 19,0
- 82 690 20000 DCONWS 20,0



UKS

Set	BD mm	OAL mm	82 690 ... PG Y8
470 E / ER32	33	40	99900 <del>476.68</del> 157.35

### Collet Set

Scope of supply

- 82 691 03000 DCONWS 3,0
- 82 691 04000 DCONWS 4,0
- 82 691 05000 DCONWS 5,0
- 82 691 06000 DCONWS 6,0
- 82 691 07000 DCONWS 7,0
- 82 691 08000 DCONWS 8,0
- 82 691 09000 DCONWS 9,0
- 82 691 10000 DCONWS 10,0
- 82 691 11000 DCONWS 11,0
- 82 691 12000 DCONWS 12,0
- 82 691 13000 DCONWS 13,0
- 82 691 14000 DCONWS 14,0
- 82 691 15000 DCONWS 15,0
- 82 691 16000 DCONWS 16,0
- 82 691 17000 DCONWS 17,0
- 82 691 18000 DCONWS 18,0
- 82 691 19000 DCONWS 19,0
- 82 691 20000 DCONWS 20,0
- 82 691 21000 DCONWS 21,0
- 82 691 22000 DCONWS 22,0
- 82 691 23000 DCONWS 23,0
- 82 691 24000 DCONWS 24,0
- 82 691 25000 DCONWS 25,0
- 82 691 26000 DCONWS 26,0





UKS

Set	BD mm	OAL mm	82 691 ... PG Y8
472 E / ER40	41	46	99900 <del>805.36</del> 251.76

## Quick change tap chuck with length compensation

- ▲ With length compensation under tension and compression (LZD)
- ▲ also available with Balluff chip on request

WNT \ Standard





A

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	83 428 ... PG Y8
SK 30	M6 - M20	02	101	55	31	15	320 <del>698.00</del> 230.78
SK 30	M3 - M12	01	60	38	19	9	312 <del>644.30</del> 203.51
SK 40	M6 - M20	02	100	55	31	15	420 <del>544.46</del> 169.94
SK 40	M3 - M12	01	60	38	19	9	412 <del>474.48</del> 157.35
SK 50	M6 - M20	02	83	55	31	15	520 <del>767.62</del> 253.86
SK 50	M3 - M12	01	62	38	19	9	512 <del>788.64</del> 233.93

## Quick change tap chuck with length compensation

- ▲ With length compensation under tension and compression (LZD)
- ▲ also available with Balluff chip on request

WNT \ Standard



A

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	83 528 ... PG Y8
BT 30	M3 - M12	01	63	38	19	9	312 <del>617.65</del> 204.56
BT 30	M6 - M20	02	96	55	31	15	320 <del>774.59</del> 255.96
BT 40	M3 - M12	01	68	38	19	9	412 <del>495.59</del> 163.64
BT 40	M6 - M20	02	93	55	31	15	420 <del>544.46</del> 169.94
BT 50	M3 - M12	01	80	38	19	9	512 <del>830.50</del> 274.84
BT 50	M6 - M20	02	102	55	31	15	520 <del>956.40</del> 315.75



Technical support: 0800 073 2 075  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

## Quick change tap adapter

- ▲ Normal version without overload clutch
- ▲ For mounting taps
- ▲ For right-hand and left-hand threads

WNT \ Standard



AD

SZID	DCONWS mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	LPR mm
01	11.0	9.0		M14	30.2	19	31	9.5
01	3.5	2.7	M3		30.2	19	31	9.5
01	4.5	3.4	M4		30.2	19	31	9.5
01	4.0	3.0	M3,5		30.2	19	31	9.5
01	2.8	2.1	M2 - M2,6		30.2	19	31	9.5
01	5.5	4.3		M7	30.2	19	31	9.5
01	6.0	4.9	M4,5 - M6	M8	30.2	19	31	9.5
01	7.0	5.5	M7	M10	30.2	19	31	9.5
01	8.0	6.2	M8	M11	30.2	19	31	9.5
01	9.0	7.0	M9	M12	30.2	19	31	9.5
01	10.0	8.0	M10		30.2	19	31	9.5
02	11.0	9.0		M14	46.3	31	46	11.0
02	6.0	4.9	M4,5 - M6		46.3	31	46	11.0
02	7.0	5.5	M7		46.3	31	46	11.0
02	8.0	6.2	M8		46.3	31	46	11.0
02	9.0	7.0	M9		46.3	31	46	11.0
02	10.0	8.0	M10		46.3	31	46	11.0
02	12.0	9.0		M16	46.3	31	46	11.0
02	14.0	11.0		M18	46.3	31	46	11.0
02	16.0	12.0		M20	46.3	31	46	11.0
02	18.0	14.5		M22 - M24	46.3	31	46	11.0



83 610 ...	PG	Y8
£	£	£
110	<del>51.10</del>	16.78
100	<del>51.10</del>	16.78
101	<del>51.10</del>	16.78
102	<del>51.10</del>	16.78
103	<del>51.10</del>	16.78
104	<del>51.10</del>	16.78
105	<del>51.10</del>	16.78
106	<del>51.10</del>	16.78
107	<del>51.10</del>	16.78
108	<del>51.10</del>	16.78
109	<del>51.10</del>	16.78
205	<del>70.27</del>	23.08
200	<del>70.27</del>	23.08
201	<del>70.27</del>	23.08
202	<del>70.27</del>	23.08
203	<del>70.27</del>	23.08
204	<del>70.27</del>	23.08
206	<del>70.27</del>	23.08
207	<del>70.27</del>	23.08
208	<del>70.27</del>	23.08
209	<del>70.27</del>	23.08

## Pull stud for tool holders according to ISO 7388-2

- ▲ MAS-BT 45° Form A and B

Scope of supply:  
including O-Ring

WNT \ Standard



Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm
BT 30	11	7	16.5	12.5	M12	43	23	18	4.0		13	20
BT 30	11	7	16.5	12.5	M12	43	23	18	4.0	2.2	13	20
BT 40	15	10	23.0	17.0	M16	60	35	28	5.5		19	50
BT 40	15	10	23.0	17.0	M16	60	35	28	5.5	4.0	19	50
BT 50	23	17	38.0	25.0	M24	85	45	35	8.0		30	150
BT 50	23	17	38.0	25.0	M24	85	45	35	8.0	6.0	30	150

82 530 ...	PG	Y8
£	£	£
030	<del>23.07</del>	7.34
040	<del>49.75</del>	6.29
050	<del>28.02</del>	9.44


82 534 ...	PG	Y8
£	£	£
030	<del>23.07</del>	7.34
040	<del>23.07</del>	7.34
050	<del>28.07</del>	9.44

## Pull studs for tool holders according to ISO 7388-1

- ▲ ISO 7388-3 AD
- ▲ For tools with or without axial coolant supply

Scope of supply:  
including O-Ring

WNT \ Standard



Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm
SK 30	13	9	17	13	M12	44	24	19	5	3.5	14	20
SK 40	19	14	23	17	M16	54	26	20	7	7.0	19	50
SK 50	28	21	36	25	M24	74	34	25	10	11.5	30	150

82 468 ...	PG	Y8
£	£	£
030	<del>48.00</del>	6.29
040	<del>46.00</del>	5.25
050	<del>23.75</del>	7.34




## Pull studs for tool holders according to ISO 7388-1

- ▲ CAT Mazak
- ▲ Face ground flat

### Scope of supply:

SK 50 including O-ring  
SK 40 without O-ring groove

WNT \ Standard





Adapter	BD_1	BD_2	BD_3	BD_4	CRKS	OAL	LF	LB_1	LB_2	CND	DRVS	TQX
	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	Nm
SK 40	18.79	12.44	21.8	17	M16	41.26	16.25	11.17	4.0	7.0	19	50
SK 50	29.10	19.60	37.0	25	M24	65.50	25.55	17.95	5.5	11.5	30	150

82 487 ...	PG	Y8
£	£	£
040	<del>16.00</del>	5.25
050	<del>25.10</del>	8.39

## ER collet chuck with mini clamping nut

- ▲ with cylindrical shank

WNT \ Standard

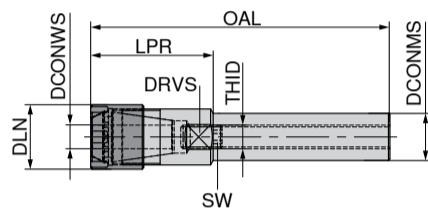

DCONMS <sub>h6</sub>	DCONWS	OAL	LPR	DLN	THID	DRVS	for collet
mm	mm	mm	mm	mm		mm	
8	1 - 5	81	26	12		9	4004E (ER08)
12	1 - 5	157	20	12	M5x0,8	10	4004E (ER08)
16	1 - 7	185	25	16	M7,5x0,5	14	4008E (ER11)
16	1 - 10	117	37	22	M11x1	17	426E (ER16)
16	1 - 10	199	39	22	M8x1,25	17	426E (ER16)
20	1 - 10	168	28	22	M11x1	17	426E (ER16)
25	1 - 13	168	28	28	M14x1	22	428E (ER20)
25	1 - 16	189	39	35	M18x1	27	430E (ER25)


83 453 ...	PG	Y8
£	£	£
081 <sup>1)</sup>	<del>164.64</del>	54.55
122	<del>348.14</del>	115.39
163	<del>342.04</del>	113.29
164	<del>348.14</del>	115.39
165	<del>342.04</del>	113.29
204	<del>245.32</del>	80.77
254	<del>283.82</del>	93.36
256	<del>357.53</del>	118.54

1) without coolant supply (form A)

## ER collet chuck with mini clamping nut

- ▲ with cylindrical shank and clamping flat

WNT \ Standard

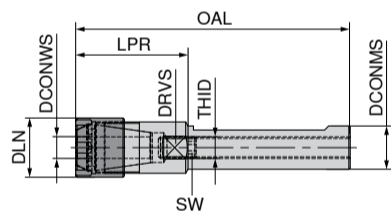



DCONMS <sub>h6</sub>	DCONWS	OAL	LPR	DLN	THID	DRVS	for collet
mm	mm	mm	mm	mm		mm	
20	1 - 10	168	28	22	M11x1	17	426E (ER16)
20	1 - 13	138	38	28	M11x1	22	428E (ER20)
20	1 - 16	146	46	35	M14x1	27	430E (ER25)
25	1 - 13	168	28	28	M14x1	22	428E (ER20)
25	1 - 16	189	39	35	M18x1	27	430E (ER25)

83 454 ...	PG	Y8
£	£	£
204	<del>245.32</del>	80.77
206	<del>476.38</del>	58.74
208	<del>206.67</del>	68.19
254	<del>283.82</del>	93.36
256	<del>357.53</del>	118.54

## ER Collet Chuck

- ▲ with cylindrical shank and clamping flat

WNT \ Standard

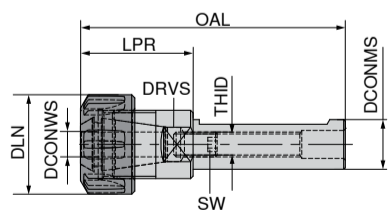

DCONMS <sub>h6</sub>	DCONWS	OAL	LPR	DLN	THID	DRVS	for collet
mm	mm	mm	mm	mm		mm	
40	2 - 20	100	35	50	M22x1,5	36	470E (ER32)
40	2 - 20	160	35	50	M22x1,5	36	470E (ER32)
40	3 - 30	139	59	63	M28x1,5	40	472E (ER40)

83 455 ...	PG	Y8
£	£	£
401	<del>208.08</del>	69.23
402	<del>258.82</del>	84.97
405	<del>299.57</del>	79.72

Note: Spanner to be ordered separately.



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com




Order by 6:00 pm and get your  
guaranteed free express delivery




When you see this logo it's  
in stock in Sheffield

### Radial tool holders, short

WNT \ Performance

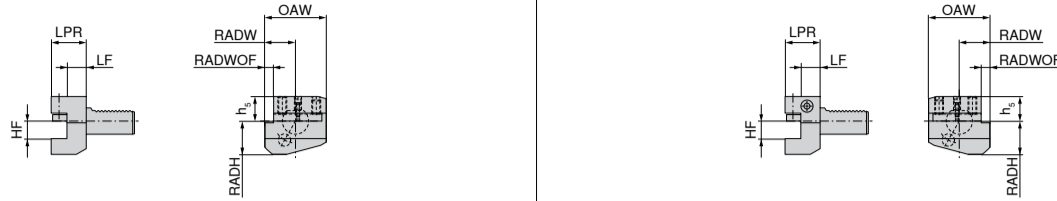


B2		DCONMS <sub>h6</sub>	HF <sub>0±0.1</sub>	OAW	RADW	RADWOF	h <sub>5</sub>	RADH	LF <sub>0±0.5</sub>	LPR
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
16	12	42	23.0	5.0	20.0	22	13.0	24		
20	16	55	30.0	7.0	25.0	30	16.0	30		
20	16	55	30.0	7.0	25.0	30	26.0	40		
30	20	70	35.0	10.0	28.0	38	18.5	40		
30	20	70	35.0	10.0	28.0	38	42.0	60		
40	25	85	42.5	12.5	32.5	48	18.5	44		
50	32	100	50.0	16.0	35.0	60	30.0	55		

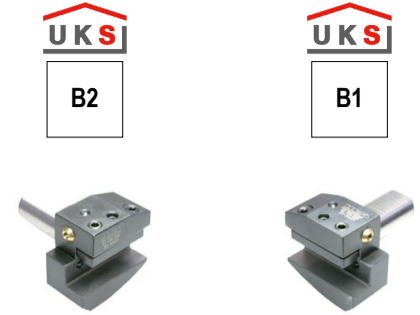

Left-hand		PG Y8		Right-hand		PG Y8	
82 189 ...	£	£	82 185 ...	£	£		
200	<del>299.87</del>	66.09	160	<del>235.29</del>	77.63		
201	<del>264.99</del>	87.07	200	<del>214.43</del>	71.33		
300	<del>247.51</del>	72.38	201	<del>247.41</del>	81.82		
301	<del>243.91</del>	113.29	300	<del>197.26</del>	65.04		
400	<del>239.41</del>	72.38	301	<del>326.36</del>	108.05		
500	<del>344.74</del>	113.29	400	<del>294.23</del>	66.09		
			500	<del>336.13</del>	111.19		

### Radial tool holders, overhead, short

WNT \ Performance

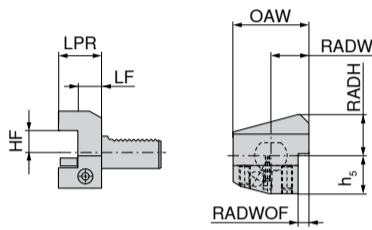


B3		DCONMS <sub>h6</sub>	HF <sub>0±0.1</sub>	OAW	RADW	RADWOF	h <sub>5</sub>	RADH	LF <sub>0±0.5</sub>	LPR
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
16	12	42	23.0	5.0	20.0	22	13.0	24		
20	16	55	30.0	7.0	25.0	30	16.0	30		
30	20	70	35.0	10.0	35.0	38	18.5	40		
40	25	85	42.5	12.5	42.5	48	18.5	44		
50	32	100	50.0	16.0	50.0	60	30.0	55		




Right-hand		PG Y8	
82 193 ...	£	£	
160	<del>248.04</del>	81.82	
201	<del>344.29</del>	102.80	
300	<del>283.19</del>	67.14	
400	<del>244.88</del>	71.33	
500	<del>344.74</del>	113.29	

### Axial tool holders

WNT \ Performance

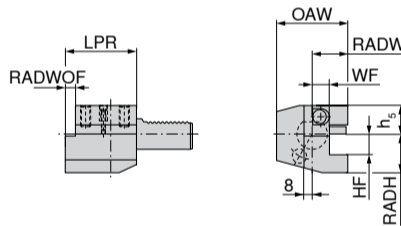

C1		DCONMS <sub>h6</sub>	HF <sub>0±0.1</sub>	OAW	RADW	WF <sub>0±0.3</sub>	h <sub>5</sub>	RADH	LPR	RADWOF
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
30	20	70	35.0	17.0	28.0	38	70	10.0		
40	25	85	42.5	20.5	32.5	48	85	12.5		
50	32	100	50.0	25.5	35.0	60	100	16.0		




Right-hand		PG Y8	
82 211 ...	£	£	
300	<del>228.74</del>	75.53	
400	<del>266.09</del>	88.12	
500	<del>387.97</del>	127.98	

### Reduction sleeves for direct clamping

▲ For tools with cylindrical shank

WNT \ Performance



A		B		Fig.	
DCONMS	DCONWS	OAL	LFSF	Fig.	
mm	mm	mm	mm		
25	12	50	4	B	
25	6	50	4	B	
25	8	50	4	B	
25	10	50	4	B	
25	16	50	4	A	
25	20	50	4	A	
32	6	58	5	B	
32	8	58	5	B	
32	10	58	5	B	
32	12	58	5	B	
32	16	58	5	A	
32	20	58	5	A	
32	25	58	5	A	
40	8	58	5	B	
40	10	58	5	B	
40	12	58	5	B	
40	16	58	5	A	
40	20	58	5	A	
40	25	58	5	A	
40	32	58	5	A	
50	25	75	5	A	
50	12	75	5	B	
50	16	75	5	A	
50	20	75	5	A	
50	32	75	5	A	
50	40	75	5	A	




Right-hand		PG Y8	
83 272 ...	£	£	
262	<del>133.85</del>	44.06	
256	<del>176.54</del>	57.70	
258	<del>133.85</del>	44.06	
260	<del>133.85</del>	44.06	
266	<del>133.85</del>	44.06	
270	<del>133.85</del>	44.06	
326	<del>181.13</del>	59.79	
328	<del>181.13</del>	59.79	
330	<del>187.63</del>	45.11	
332	<del>187.63</del>	45.11	
336	<del>187.63</del>	45.11	
340	<del>187.63</del>	45.11	
345	<del>187.63</del>	45.11	
408	<del>220.04</del>	72.38	
410	<del>181.13</del>	59.79	
412	<del>181.13</del>	59.79	
416	<del>181.13</del>	59.79	
420	<del>181.13</del>	59.79	
425	<del>181.13</del>	59.79	
432	<del>181.13</del>	59.79	
525	<del>284.35</del>	67.14	
512	<del>284.35</del>	67.14	
516	<del>284.35</del>	67.14	
520	<del>284.35</del>	67.14	
532	<del>284.35</del>	67.14	
540	<del>284.35</del>	67.14	



### ER Collet chucks

WNT \ Performance

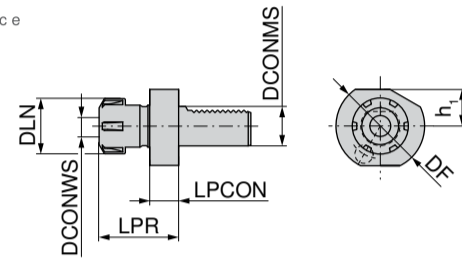

DCONMS <sub>h6</sub>	DCONWS	DF	DLN	h <sub>1</sub>	LPR	LPCON	for collet
mm	mm	mm	mm	mm	mm	mm	
16	1 - 10	40	28	18.0	43.5	14	426E (ER16)
16	1 - 13	40	34	18.0	44.0	14	428E (ER20)
20	1 - 16	50	42	23.0	57.0	18	430E (ER25)
20	2 - 20	50	50	23.0	62.0	18	470E (ER32)
30	1 - 16	68	42	28.0	57.0	22	430E (ER25)
30	2 - 20	68	50	28.0	75.0	22	470E (ER32)
40	1 - 16	83	42	32.5	75.0	22	430E (ER25)
40	2 - 20	83	50	32.5	75.0	22	470E (ER32)
40	3 - 26	83	63	32.5	75.0	22	472E (ER40)
50	2 - 20	94	50	35.0	75.0	30	470E (ER32)
50	3 - 26	94	63	35.0	63.0	30	472E (ER40)


Right-hand		PG Y8	
82 286 ...	£	£	
160	<del>309.24</del>	112.24	
161	<del>335.69</del>	111.19	
202	<del>276.34</del>	91.26	
203	<del>288.02</del>	95.46	
300	<del>272.77</del>	90.21	
301	<del>273.62</del>	90.21	
400	<del>295.76</del>	97.56	
401	<del>295.76</del>	97.56	
402	<del>298.46</del>	96.51	
500	<del>430.76</del>	142.66	
501	<del>430.76</del>	142.66	

### Boring bar holder

▲ for turning tools with cylindrical shank

▲ Coolant supply either through the tool or via the ball-shaped spray nozzle

WNT \ Performance

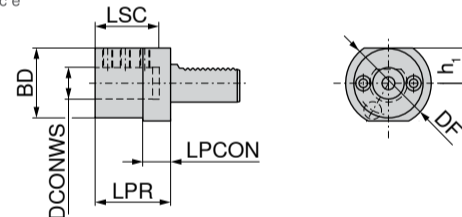

DCONMS <sub>h6</sub>	DCONWS <sub>H7</sub>	DF	BD	h <sub>1</sub>	LPR	LPCON	LSC
mm	mm	mm	mm	mm	mm	mm	mm
16	6	40	32	18.0	44	13	34
16	8	40	32	18.0	44	13	34
16	10	40	32	18.0	44	13	34
16	12	40	40	18.0	44	13	34
16	16	40	40	18.0	44	13	34
20	8	50	40	23.0	50	18	41
20	10	50	40	23.0	50	18	41
20	12	50	40	23.0	50	18	41
20	16	50	40	23.0	50	18	41
20	20	50	50	23.0	50	18	41
20	25	50	50	23.0	60	18	51
30	8	68	55	28.0	60	22	51
30	10	68	55	28.0	60	22	51
30	12	68	55	28.0	60	22	51
30	16	68	55	28.0	60	22	51
30	20	68	55	28.0	60	22	51
30	25	68	55	28.0	60	22	51
30	32	68	68	28.0	75	22	61
40	8	83	55	32.5	75	22	61
40	10	83	55	32.5	75	22	61
40	12	83	55	32.5	75	22	61
40	16	83	55	32.5	75	22	61
40	20	83	55	32.5	75	22	61
40	25	83	55	32.5	75	22	61
40	32	83	83	32.5	75	22	61
40	40	83	83	32.5	90	22	76
50	12	98	68	35.0	90	30	76
50	16	98	68	35.0	90	30	76
50	20	98	68	35.0	90	30	76
50	25	98	68	35.0	90	30	76
50	32	98	68	35.0	90	30	76
50	40	98	98	35.0	90	30	76
50	50	98	98	35.0	100	30	86


Right-hand		PG Y8	
82 268 ...	£	£	
160	<del>294.09</del>	96.51	
161	<del>292.08</del>	73.43	
162	<del>292.08</del>	73.43	
163	<del>292.08</del>	73.43	
164	<del>292.08</del>	73.43	
200	<del>296.47</del>	68.19	
201	<del>296.47</del>	68.19	
202	<del>296.47</del>	68.19	
203	<del>296.47</del>	68.19	
204	<del>296.47</del>	68.19	
205	<del>296.47</del>	68.19	
300	<del>294.23</del>	66.09	
301	<del>294.23</del>	66.09	
302	<del>294.23</del>	66.09	
303	<del>294.23</del>	66.09	
304	<del>294.23</del>	66.09	
305	<del>294.23</del>	66.09	
306	<del>294.23</del>	66.09	
400	<del>295.14</del>	68.19	
401	<del>295.14</del>	68.19	
402	<del>295.14</del>	68.19	
403	<del>295.14</del>	68.19	
404	<del>295.14</del>	68.19	
405	<del>295.14</del>	68.19	
406	<del>295.14</del>	68.19	
407	<del>295.14</del>	68.19	
500	<del>295.49</del>	97.56	
501	<del>295.49</del>	97.56	
502	<del>295.49</del>	97.56	
503	<del>293.34</del>	93.36	
504	<del>293.34</del>	93.36	
505	<del>293.34</del>	93.36	
506	<del>293.34</del>	93.36	

1) Coolant supply through pipe joint

## CentriClamp – ZSG 4

- ▲ Sealed centric vice
- ▲ With grip jaws, 3 mm
- ▲ Ball bearing mounted spindle
- ▲ ± 0.01 mm repeatability
- ▲ Suitable for PNG and MNG

ZSG 4 WNT \ Standard

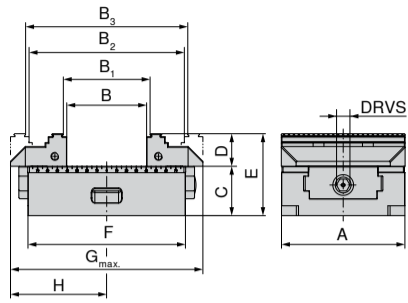

A	B	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>	C <sub>±0.01</sub>	D	E	F	G <sub>max</sub>	H	DRVS	MXC	WT
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg
80	0 - 59	4 - 63	59 - 117	63 - 121	50	28	78	130	157	81	12	25	3.9
80	0 - 123	4 - 127	59 - 181	63 - 185	50	28	78	190	206	104	12	25	5.5
125	0 - 80	8 - 87	77 - 156	84 - 163	50	33	83	160	208	111	12	35	8.7

80 878 ...	Y4
£	£
08700	<del>747.04</del> 681.85
08800	<del>854.04</del> 786.75
15300	<del>943.05</del> 891.65

## Base plate, round



80 899 ...	Y4
£	£
125	<del>549.63</del> 398.62

## MNG indexing bolt



80 899 ...	Y4
£	£
51500	<del>46.78</del> 11.54

## MNG pull studs




80 899 ...	Y4
£	£
025	<del>47.21</del> 33.57

**i** It is not possible to fit top jaws with a height of 40 mm, if this height is required, please use the reversible jaws with D = 40 mm (Article No. 80 878 520).

## CentriClamp – ZSG 4


- ▲ Sealed centric vice for Erowa ITS 148
- ▲ Ball bearing mounted spindle
- ▲ ± 0.01 mm repeatability

ZSG 4 WNT \ Standard

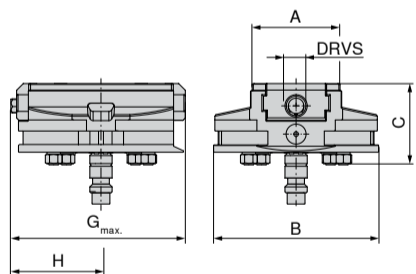

A	C	F	G <sub>max</sub>	DRVS	MXC	WT
mm	mm	mm	mm	mm	kN	kg
80	73	148	130	12	25	5,6

80 878 ...	Y4
£	£
08900	<del>1,315.45</del> 1,153.90



**G** MADE IN SHEFFIELD

**i** Talk to us about your special workholding requirements



**Technical support: 0800 073 2 075**  
3 time served engineers,  
available from 8:00 am to 6:00 pm, Monday to Friday  
Email: techsupport.uk@ceratizit.com



Order by 6:00 pm and get your  
guaranteed free express delivery



When you see this logo it's  
in stock in Sheffield

# Our warehouse in your machine shop...

## Access to cutting tools 24/7

With full control.

## Major cashflow benefits

You only pay for the tools you use.

## Zero obsolete stock

You don't get left with old cutting tool technology.

## Major purchasing cost reduction

Only one consolidated invoice per month, with no management fee.

## For all vending customers

We will collect your used carbide, recycle it back into our system and pay you a 10% premium on market rate for it, current rate £17.50 per Kg.



CERATIZIT UK & IRELAND LTD  
Europa Link \ UK-Sheffield S9 1XU  
Tel.: 0800 073 2 073  
info.uk@ceratizit.com \ www.ceratizit.com

