

## New products for machining technicians

### **NEW** High pressure chuck



HyPower – Rough

- ▲ For highly dynamic milling operations
- ▲ Best results when using tools with a HA shank
- ▲ Maximum process security, even for high-quality components
- ▲ Developed for the requirements of a wide range of markets (including tool and die production, aerospace and the automotive sector)



HyPower – Access 4,5°

- ▲ For reaming and drilling applications as well as finishing during milling operations
- ▲ Maximum flexibility when machining components critical to contours
- ▲ Developed for the requirements of a wide range of markets (including tool and die production, aerospace and the automotive sector)

### **NEW** PSC parting blade holders and square shank holders with DirectCooling



Our new DirectCooling turning and grooving tool holders in specially tailored PSC adapters. The DirectCooling interface is perfectly adapted and the holders have been specially developed for these tools.

### **NEW** VDI holders with DirectCooling



The VDI holder with DirectCooling is incredibly versatile owing to its 4-in-1 functionality. Thanks to its double tooth profile, only one holder is needed. The clamping rails can be attached at the top or bottom, as an optional extra.

### **NEW** Shell mill adapter



These shell mill adapters, which were developed specially for the MaxiMill 211-KN porcupine cutters, are being added to our product range. Now the porcupine cutters can be securely clamped thanks to the adapted flange diameters.

### **NEW** Torsional vibration dampers with ABS connection



The popular and very useful torsional vibration damper with ABS connection has been supplemented with the PSC interface. This extension is enhancing our complete range and we can now also clamp without an adapter directly on machines with the PSC interface.

### **NEW** BMT holders with DirectCooling



We have expanded our portfolio to include various BMT systems with DirectCooling.



Solid drilling and bore machining

- 1 HSS drilling
- 2 Solid carbide drilling
- 3 Indexable insert drilling
- 4 Reaming and Countersinking
- 5 Spindle Tooling

Threading

- 6 Taps and thread formers
- 7 Circular and Thread Milling
- 8 Thread turning

Turning

- 9 Turning Tools
- 10 Multifunctional Tools – EcoCut and FreeTurn
- 11 Grooving Tools
- 12 Miniature turning tools

Milling

- 13 HSS Milling Cutters
- 14 Solid Carbide milling cutters
- 15 Milling tools with indexable inserts

Clamping technology

- 16 Adaptors and Accessories
- 17 Workpiece clamping

- 18 Material examples and article no. Index

## Table of contents

Symbol explanation	4
<b>Toolfinder</b>	
Machine interface	5
Rotating toolholders	6+7
Adapters, stationary	
– HSK-T and PSC tool holders	8+9
– VDI adapters for star turrets	10
– VDI adapters for disc turrets	11
– BMT tool holders	12
Accessories	13
<b>Product programme</b>	
Adapters and accessories	14–302
<b>Technical Information</b>	
Driven Tools	303+304
Quick-Change	305+306
Technical data – ISO 7388-1 / ISO 7388-2 / ISO 26623-1	307
Technical data – ISO 12164	308
Technical Information for Polygon Shank Adapters	309
HyPower / HyTens	310–312
Static clamping moments / Centro-P and HDC ER precision collet chucks	313
Technical information – ABS	314
Compensation holder DAH	315

## WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

## WNT \ Standard

Quality tools for standard applications.

The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

## Symbol explanation

### Coolant supply version



without coolant supply (Form A)



Coolant supply central  
Steep taper Form AD



Coolant supply either via the flange, or central (Form AD/B)



with eroded cooling ducts



DC = DirectCooling



specially matched adapter for ThermoGrip® shrinking process



Coolant supply centrally or via the collar  
with eroded cooling channels



Adapter with two additional coolant holes



Coolant supply centrally or via the collar  
also additional coolant holes



Central coolant supply or via a coolant nozzle




Collet description

▲ Type version  
▲ Radial run-out accuracy

## Toolfinder – Machine interface

## ISO 7388-1 – SK steep taper holders




- ▲ SK 30
- ▲ SK 40
- ▲ SK 50
- ▲ SK-FC 50

▶	Toolfinder – Adapters, rotating	6+7
	Product programme	14–60

## ISO 7388-2 – MAS-BT taper shank

## MAS-BT / MAS-BT-FC with face contact




- ▲ BT 30
- ▲ BT 40
- ▲ BT 50
- ▲ BT-FC 30
- ▲ BT-FC 40
- ▲ BT-FC 50

▶	Toolfinder – Adapters, rotating	6+7
	MAS-BT product range	61–101 / 110+111
	MAS-BT-FC product range	102–109

## HSK hollow taper adapters with face contact

## ISO 12164 – HSK-A / HSK-E



- ▲ HSK-A 40
- ▲ HSK-A 50
- ▲ HSK-A 63
- ▲ HSK-A 100
- ▲ HSK-E 25
- ▲ HSK-E 32
- ▲ HSK-E 40
- ▲ HSK-E 50

▶	Toolfinder – Adapters, rotating	6+7
	HSK-A product range	112–152 / 156
	HSK-E product range	153–155

## ISO 12164-3 – HSK-T

- ▲ HSK-T 63
- ▲ HSK-T 100

▶	Toolfinder – Adapters, stationary	8+9
	Product programme	193–195

## ISO 26623-1 – PSC polygon hollow adapters with face contact

## PSC, rotating



- ▲ PSC 32
- ▲ PSC 40
- ▲ PSC 50
- ▲ PSC 63
- ▲ PSC 80


▶	Toolfinder – Adapters, rotating	6+7
	Product programme	157–176

## PSC, stationary

- ▲ PSC 32
- ▲ PSC 40
- ▲ PSC 50
- ▲ PSC 63
- ▲ PSC 80
- ▲ PSC 80X

▶	Toolfinder – Adapters, stationary	8+9
	Product programme	198–204


## ISO 10889 – VDI tool holders with cylindrical shank



- ▲ VDI 16
- ▲ VDI 20
- ▲ VDI 25
- ▲ VDI 30
- ▲ VDI 40
- ▲ VDI 50

▶	Toolfinder – Adapters, stationary	10+11
	Product programme	205–226
	Driven Tools	303+304

## BMT tool holders































- ▲ Doosan/Spinner – BMT 45
- ▲ Doosan – BMT 55
- ▲ EMAG – BMT 55
- ▲ HAAS/Doosan – BMT 65
- ▲ Mori/Seiki – BMT 40
- ▲ Mori/Seiki – BMT 60
- ▲ Mazak – BMT 68

▶	Toolfinder – Adapters, stationary – BMT tool holders	12
	Product programme	227–240







































































# Toolfinder – Adaptors, rotating

Holder Type	ISO 7388-1		ISO 7388-2		ISO 12164		ISO 26623-1	ABS	Morse taper	Cylindrical shank
	SK	SK-FC	MAS-BT	MAS-BT-FC	HSK-A	HSK-E	PSC			
Accuracy										
Maximum										
ER Precision Collet chuck										
▲ Centro-P			14–16	61–63	102	112–114	153+154	157		252
▲ HDC			17	64	103	115				
HyPower – High Pressure Milling Chuck										
			18–21	65–68	105	116–119		158		
HyTens – Hydraulic chuck										
			22+23	69+70	120–122	120+122		177		248+249
Heat Shrink Adapter										
			30–29	71–75	104	123–130	155	159–161	178	247
Micro-Precision Collet Chuck										
										250
High										
Cylindrical shank adapter										
▲ Weldon			30–32	76+78	106	131+132		162	179	251
▲ Whistle Notch			33+34	79+80		133		163	180+181	
Indexable insert drill adapter										
			42	81		134		164		
Collet Chuck										
▲ Precision Collet chuck – PCC			36	82		135				
▲ ER Collet chuck			37+38	83	107	136+137		165+166	182	253+254
Short drill chuck										
			39	84		138		167	183	243
Quick change tapping chuck										
▲ With minimum length compensation			40+41	85+86		139		168	184	244
▲ with length compensation			42	87		140		169	183	245
ABS adapters										
			43+44	45	88–90	108	141+142	170+171	187–191	 84 232 ...
Compensation holder DAH										
			The DAH length compensation chucks are available in our online shop. Technical information on the products can be found on <b>page 315</b> .							

Main Application		Finishing		Roughing - Finishing		Roughing
Extended application						





# Toolfinder – Adaptors, rotating


Holder Type	ISO 7388-1		ISO 7388-2		ISO 12164		ISO 26623-1	ABS	Morse taper	Cylindrical shank																																																																																																																																																										
	SK	SK-FC	MAS-BT	MAS-BT-FC	HSK-A	HSK-E	PSC																																																																																																																																																													
<div style="display: flex; justify-content: space-around; align-items: center;">         </div>																																																																																																																																																																				
<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> <p>Accuracy</p> <p>Medium</p> </div> <div style="flex-grow: 1;"> <table border="1"> <tr> <td>Adapter for milling cutters with threaded end</td> <td></td> <td></td> <td>46+47</td> <td>91</td> <td>143+144</td> <td></td> <td>172</td> <td></td> <td></td> <td>255+256</td> </tr> <tr> <td>Face mill adapter</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>▲ Combination shell mill adapter</td> <td></td> <td></td> <td>48</td> <td>92</td> <td>145</td> <td></td> <td></td> <td>186</td> <td></td> <td></td> </tr> <tr> <td>▲ Shell mill adapter</td> <td></td> <td></td> <td>49-51</td> <td>93-95</td> <td>109</td> <td>146-148</td> <td></td> <td>173</td> <td>185</td> <td></td> </tr> <tr> <td>▲ Large diameter facemill adapter</td> <td></td> <td></td> <td>52</td> <td>96</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Drill chuck adapter</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>242</td> <td></td> </tr> <tr> <td>Taper adapter for Morse taper</td> <td></td> <td></td> <td>53</td> <td>97</td> <td>149</td> <td></td> <td>174</td> <td></td> <td>242</td> <td></td> </tr> <tr> <td>Adapter</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>▲ SK</td> <td></td> <td></td> <td>54</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>▲ MAS-BT</td> <td></td> <td></td> <td></td> <td>98</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>▲ HSK-A</td> <td></td> <td></td> <td>55</td> <td>99</td> <td>150</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>▲ PSC</td> <td></td> <td></td> <td>56</td> <td>100</td> <td>151</td> <td></td> <td>202+203</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Blank</td> <td></td> <td></td> <td>57</td> <td>101</td> <td>152</td> <td></td> <td>175</td> <td>192</td> <td></td> <td></td> </tr> <tr> <td>Test bar</td> <td></td> <td></td> <td>57</td> <td>101</td> <td>152</td> <td></td> <td>176</td> <td></td> <td></td> <td></td> </tr> </table> </div> </div>											Adapter for milling cutters with threaded end			46+47	91	143+144		172			255+256	Face mill adapter											▲ Combination shell mill adapter			48	92	145			186			▲ Shell mill adapter			49-51	93-95	109	146-148		173	185		▲ Large diameter facemill adapter			52	96							Drill chuck adapter									242		Taper adapter for Morse taper			53	97	149		174		242		Adapter											▲ SK			54								▲ MAS-BT				98							▲ HSK-A			55	99	150						▲ PSC			56	100	151		202+203				Blank			57	101	152		175	192			Test bar			57	101	152		176			
Adapter for milling cutters with threaded end			46+47	91	143+144		172			255+256																																																																																																																																																										
Face mill adapter																																																																																																																																																																				
▲ Combination shell mill adapter			48	92	145			186																																																																																																																																																												
▲ Shell mill adapter			49-51	93-95	109	146-148		173	185																																																																																																																																																											
▲ Large diameter facemill adapter			52	96																																																																																																																																																																
Drill chuck adapter									242																																																																																																																																																											
Taper adapter for Morse taper			53	97	149		174		242																																																																																																																																																											
Adapter																																																																																																																																																																				
▲ SK			54																																																																																																																																																																	
▲ MAS-BT				98																																																																																																																																																																
▲ HSK-A			55	99	150																																																																																																																																																															
▲ PSC			56	100	151		202+203																																																																																																																																																													
Blank			57	101	152		175	192																																																																																																																																																												
Test bar			57	101	152		176																																																																																																																																																													

Main Application		Finishing		Roughing - Finishing		Roughing
Extended application						


# Toolfinder – Stationary adaptors – HSK-T and PSC tool holders





## Toolholders for negative turning inserts


	Type	Article no.	Illustration
	Machining		
	DCLN 95° Internal + External	74 503 + 74 504	
	DCMN 95° External	74 506	
	DCMN+ DDMN External	74 600	


 All tool holders for negative rotary indexable inserts CN.. can be found in → **Section 9, Turning Tools**

	DCMN+ DDMN External	74 600	
	DDUN 93° Internal + External	74 515 + 74 516	
	DDJN 93° Internal + External	74 511 + 74 512	
	DDHN 107,5° Internal + External	74 507 + 74 508	
	DDMN 48° External	74 519	




 All tool holders for negative rotary indexable inserts DN.. can be found in → **Section 9, Turning Tools**


	DSDN 45° External	74 522	
		DVMN 50° External	74 525
		DWLN 95° Internal + External	74 528 + 74 529






 All tool holders for negative rotary indexable inserts SN.., VN.. and WN.. can be found in → **Section 9, Turning Tools**


 You can find more information on the multifunction tool EcoCut in → **Section 10, Multifunctional Tools – EcoCut and FreeTurn**



## Toolholders for positive turning inserts


	Type	Article no.	Illustration
	Machining		
	SCLC 95° Internal + External	74 540 + 74 541	
	SCMC 50° External	74 542	







 All tool holders for positive rotary indexable inserts CC.. can be found in → **Section 9, Turning Tools**


	SDJC 93° Internal + External	74 543 + 74 544	
	SDNC 62,5° Internal + External	74 677	
	SDMC 48° External	74 546	

 All tool holders for positive rotary indexable inserts DC.. can be found in → **Section 9, Turning Tools**

	PRDC 0° External	74 548	
	PRSC Internal + External	74 551 + 74 552	

 All tool holders for positive rotary indexable inserts RC.. can be found in → **Section 9, Turning Tools**

	SVUC 93° Internal + External	74 557 + 74 558	
	SVJC 93° Internal + External	74 555 + 74 556	
	SVHC 107,5° Internal + External	74 553 + 74 554	
	SVMC 50° External	74 560	

 All tool holders for positive rotary indexable inserts VC.. can be found in → **Section 9, Turning Tools**



# Toolfinder – Stationary adapters – HSK-T and PSC tool holders

## Holders for grooving and threading inserts

Type	Article no.	Illustration
0°	74 580 + 74 581	

All tool holders for grooving and threading inserts can be found in → **Section 11, Grooving tools**

## Toolholders for threading inserts

Type	Article no.	Illustration
Internal thread	84 196 + 84 197	
External thread	84 190 + 84 191	

All tool holders for threading inserts can be found in → **Section 8, Thread turning**

## Boring bars for negative inserts

Type	Article no.	Illustration
CN.. DCLN 95°	74 528 + 74 529	
DN.. DDUN 93°	74 532 + 74 533	
WN.. DWLN 95°	74 536 + 74 537	

All boring bars for negative indexable inserts can be found in → **Section 9, Turning Tools**

## Boring bars for positive inserts

Type	Article no.	Illustration
CC.. SCLC 95°	74 563 + 74 564	
DC.. SDUC 93°	74 565 + 74 566	
VC.. SVUC 93°	74 567 + 74 568	
	SVQC 107,5°	70 748 + 70 749

All boring bars for positive indexable inserts can be found in → **Section 9, Turning Tools**

## Basic holder

Type	Illustration	Direct Cooling	HSK-T ISO 12164	PSC ISO 26623
Square shank holder 0°			194+195	196 198
Square shank holder 45°			194+195	197 199
Square shank holder 90°			194+195	197 198
Square shank holder 2 face 0°				199
Square shank holder 3 face 0°			195	199
Boring bar holder			195	200

## Parting blade holders


Type	Illustration	Direct Cooling	HSK-T ISO 12164	PSC ISO 26623
Parting blade holder 0°			193	196 198
Parting blade holder 90°			193	196 198

## Accessories



Protection plug		204
Hollow nose keys		204











## Toolfinder – Stationary adapters – VDI adapters for star turrets







Toolholders above







Upper turret	Spindle rotation clockwise	Spindle rotation counter clockwise
 Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C1/C2/D1/D2 205–207 209–212	B2/B3/B6/B7/C3/C4/D1/D2 205–207 209–212
 Parting blade holders / DirectCooling	double 208 216+217	double – overhead 208 216+217
 Adapter VDI to VDI	Left-hand 222	Left-hand 222
 Boring bar holder	Left-hand 222	Left-hand 222




Lower turret	Spindle rotation clockwise	Spindle rotation counter clockwise
 Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C3/C4/D1/D2 205–207 209–212	B2/B3/B6/B7/C1/C2/D1/D2 205–207 209–212
 Parting blade holders / DirectCooling	double – overhead 208 216+217	double 208 216+217
 Adapter VDI to VDI	Right-hand 222	Right-hand 222
 Boring bar holder	Right-hand 222	Right-hand 222



## Toolholders below



Upper turret	Spindle rotation clockwise	Spindle rotation counter clockwise
 Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C3/C4/D1/D2 205–207 209–212	B2/B3/B6/B7/C1/C2/D1/D2 205–207 209–212
 Parting blade holders / DirectCooling	double 208 216+217	double – overhead 208 216+217
 Adapter VDI to VDI	Right-hand 222	Right-hand 222
 Boring bar holder	Right-hand 222	Right-hand 222

Lower turret	Spindle rotation clockwise	Spindle rotation counter clockwise
 Square Shank Adapters / DirectCooling	B2/B3/B6/B7/C1/C2/D1/D2 205–207 209–212	B2/B3/B6/B7/C3/C4/D1/D2 205–207 209–212
 Parting blade holders / DirectCooling	double – overhead 208 216+217	double 208 216+217
 Adapter VDI to VDI	Left-hand 222	Left-hand 222
 Boring bar holder	Left-hand 222	Left-hand 222










## Toolfinder – Stationary adapters – VDI adapters for disc turrets








Upper turret	Spindle rotation clockwise		Spindle rotation counter clockwise	
 Square Shank Adapters / DirectCooling	B1/B5/C1/C2/D1	205–207 209–212	B3/B7/C3/C4/D2	205–207 209–212
 Part Off Holder	Right-hand	208 216+217	Overhead right	208 216+217

Lower turret	Spindle rotation clockwise		Spindle rotation counter clockwise	
 Square Shank Adapters / DirectCooling	B4/B8/C3/C4/D2	205–207 209–212	B2/B6/C1/C2/D1	205–207 209–212
 Part Off Holder	Overhead left	208 216+217	Left-hand	208 216+217
















































### General VDI adapters

 Cylindrical Shank Adapters	E/E1/E2/E3/E4			212–214
 Taper Adapters	F1			215
 Short drill chuck	NC 2010			218
 ER Collet chuck				215
 Hydraulic chuck				219
 VDI to PSC adapter				223
 VDI to HSK-T adapter				224
 VDI adapter with ABS-N connection	This article can be found in our online shop at <a href="http://cuttingtools.ceratizit.com">cuttingtools.ceratizit.com</a>			84 231 ...























### Accessories

 Test arbors				220
 Tool holders				220
 Bar pullers				225
 Gripper accessories				226
 Protection plug				226

## Toolfinder – Adapters, stationary – BMT tool holders

Doosan/Spinner – BMT 45				Mori/Seiki – BMT 40					
	Axial square section tool holder	Left-hand		227		Axial square section tool holder	Left-hand		235
	Square section adapter	Left-hand		227		Square section adapter	Left-hand		235
	Square multiple tool holder			228		Square multiple tool holder			236
	Combi tool holder	with thro' coolant		228		Combi tool holder	with thro' coolant		236
Doosan – BMT 55				Mori/Seiki – BMT 60					
	Axial square section tool holder	Left-hand		229		Axial square section tool holder	Left-hand		237
	Square section adapter	Left-hand		229		Square section adapter	Left-hand		237
	Square multiple tool holder			230		Square multiple tool holder			238
	Boring bar holder	with thro' coolant		230		Combi tool holder	with thro' coolant		238
EMAG – BMT 55				Mazak – BMT 68					
	Axial square section tool holder	Left-hand		231		Axial square section tool holder	Left-hand		239
	Square section adapter	Left-hand		231		Square section adapter	Left-hand		239
	Boring bar holder	with thro' coolant		232		Square multiple tool holder			240
	Combi tool holder	with thro' coolant		240					
HAAS/Doosan – BMT 65									
	Axial square section tool holder	Left-hand		233					
	Square section adapter	Left-hand		233					
	Square multiple tool holder			234					
	Combi tool holder	with thro' coolant		234					

## Toolfinder – accessories

Type		Page No.	Type		Page No.	
Pull stud	SK	58–60	Spare parts for VDI		264–266	
	MAS-BT	110+111		Spare parts driven tools		267
	PSC	176			Quick change applications	
Coolant pipe/key	HSK-A	156	Reduction sleeve and reducing bushings			282+283
	PSC	176		3D tester and zero setting device		299+300
Drill chuck with internal taper		241	Cleaning propeller			302
Tap clamping sleeve for Weldon adapters		246		TORX® screwdrivers, TORX® interchangeable blades, TORX® bit holders and adapters		294–298
Extension for Shell mill arbors		262	Assembly device for SK, HSK and PSC adapters			284
Milling adapter ring		263		MultiChange – Holder		259–261
Lock nuts ER-Standard and ER-Mini		287	MultiChange key			293
Y clamping key and ER-Mini clamping key		287		Cool-jet		301
Spare parts Centro-P		285	Taper wiper			284
Roll key		286				
ER collets		268–278				
Sealing discs		280+281				




# ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

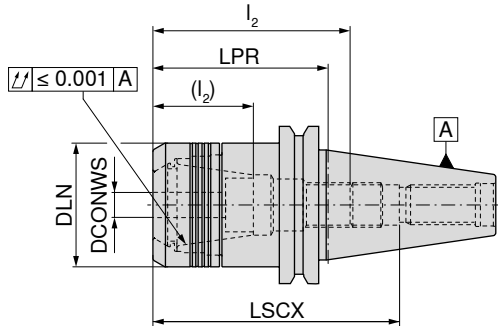

AD  
G 2,5  $n_{max}$  25000

**84 424 ...**



AD/B  
G 2,5  $n_{max}$  25000

**84 414 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet		
SK 30	2 - 16	70	40	66	35 - 49 (18 - 31)	430E (ER25)		<b>016</b>
SK 40	1 - 10	70	30	110	28 - 45 (16 - 31)	426E (ER16)		<b>102</b>
SK 40	1 - 10	100	30	140	28 - 45 (16 - 31)	426E (ER16)		<b>103</b>
SK 40	1 - 10	130	30	140	28 - 50 (14 - 34)	426E (ER16)		<b>510</b>
SK 40	1 - 10	160	30	200	28 - 45 (16 - 31)	426E (ER16)		<b>910</b>
SK 40	2 - 16	45	40	85	35 - 60 (20 - 42)	430E (ER25)		<b>816</b>
SK 40	2 - 16	70	40	110	35 - 60 (20 - 42)	430E (ER25)		<b>162</b>
SK 40	2 - 16	100	40	113	35 - 60 (20 - 42)	430E (ER25)		<b>163</b>
SK 40	2 - 16	130	40	140	38 - 67 (21 - 49)	430E (ER25)		<b>516</b>
SK 40	2 - 16	160	40	118	35 - 60 (20 - 42)	430E (ER25)		<b>916</b>
SK 40	2 - 20	50	50	85	52 - 70 (26 - 52)	470E (ER32)		<b>201</b>
SK 40	2 - 20	70	50	111	55 - 75 (42 - 62)	470E (ER32)		<b>202</b>
SK 40	2 - 20	100	50	114	52 - 70 (32 - 52)	470E (ER32)		<b>203</b>
SK 40	2 - 20	130	50	114	50 - 74 (36 - 55)	470E (ER32)		<b>620</b>
SK 40	2 - 20	160	50	119	52 - 70 (32 - 52)	470E (ER32)		<b>920</b>
SK 40	3 - 26	70	63	105	48 - 55	472E (ER40)		<b>261 <sup>1)</sup></b>
SK 50	2 - 16	100	40	150	35 - 64 (20 - 48)	430E (ER25)		<b>167</b>
SK 50	2 - 20	70	50	120	59 - 85 (40 - 70)	470E (ER32)		<b>320</b>
SK 50	2 - 20	100	50	150	53 - 81 (35 - 63)	470E (ER32)		<b>520</b>
SK 50	2 - 20	130	50	150	53 - 81 (35 - 63)	470E (ER32)		<b>52100</b>
SK 50	2 - 20	160	50	200	53 - 83 (35 - 65)	470E (ER32)		<b>720</b>
SK 50	3 - 26	70	63	120	48 - 60	472E (ER40)		<b>26600</b>
SK 50	3 - 26	100	63	90	48 - 70	472E (ER40)		<b>26700</b>
SK 50	3 - 26	130	63	90	47 - 57	472E (ER40)		<b>26800</b>
SK 50	3 - 26	160	63	90	47 - 57	472E (ER40)		<b>26900</b>

1) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 3 mm longer

## Spare parts ER precision collet chuck – Centro-P


Spare parts for collet	Lock nut IK	Lock nut	Stop screw 2		Stop screw 1	
	84 950 ...	84 950 ...	83 950 ...		83 950 ...	
426E (ER16)	011	001	M11x1 - SW6	341	M11x1 - SW6	337
430E (ER25)	013	003	M18x1,5 - SW6	432	M18x1,5 - SW6	431
470E (ER32)	015	005	M22x1,5 - SW6	402	M22x1,5 - SW6	401
472E (ER40)	017	007			M28x1,5 - SW6	400

## ER Precision tapered collet chuck – Centro-P

- ▲ for special tapered nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without** nut, **without** backstop

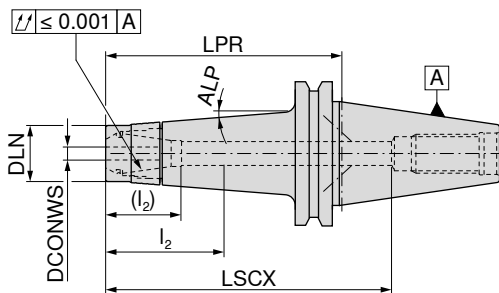

AD/B  
G 2,5  $n_{max}$  25000

84 417 ...

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	ALP	
SK 40	1 - 10	100	24	140	28 - 48 (20 - 35)	426E (ER16)	4,5°	410
SK 40	1 - 10	130	24	105	28 - 48 (20 - 35)	426E (ER16)	3,5°	61000
SK 40	1 - 10	160	24	200	28 - 48 (20 - 35)	426E (ER16)	2,5°	910

→ Transmittable torque moments, Page 313

- 1** LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Tapered lock nut IK	Tapered lock nut	Stop screw 2		Stop screw 1	
	84 950 ...	84 950 ...	83 950 ...		83 950 ...	
426E (ER16)	033	031	M11x1 - SW6	341	M11x1 - SW6	337

### Accessories


ER collet	Sealing ring	Roll key	Roll key device	Pull studs	Others
→ 268–276, 279	→ 280	→ 286	→ 286	→ 58, 60	→ 284

# ER Precision collet chuck, slim version – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max}$  80 bar
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Holder **without nut, without backstop**

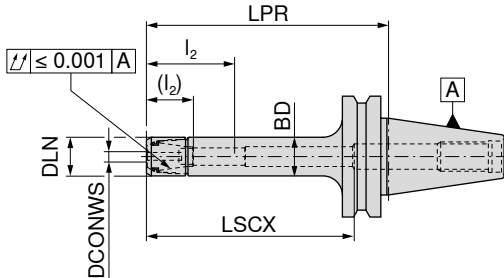

AD/B  
G 2,5  $n_{max}$  25000

**84 412 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	BD mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	
<b>SK 40</b>	1 - 7	70	16	16	60	15 - 32 (7 - 22)	4008E (ER11)	<b>207</b>
<b>SK 40</b>	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	<b>407</b>
<b>SK 40</b>	1 - 7	130	16	16	110	15 - 32 (7 - 22)	4008E (ER11)	<b>607</b>
<b>SK 40</b>	1 - 7	160	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	<b>907</b>
<b>SK 40</b>	1 - 10	70	22	22	90	28 - 50 (14 - 36)	426E (ER16)	<b>210</b>
<b>SK 40</b>	1 - 10	100	22	22	110	28 - 50 (14 - 36)	426E (ER16)	<b>310</b>
<b>SK 40</b>	1 - 10	130	22	22	140	28 - 50 (14 - 36)	426E (ER16)	<b>410</b>
<b>SK 40</b>	1 - 10	160	22	22	170	28 - 50 (14 - 36)	426E (ER16)	<b>510</b>

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK	Mini lock nut	Stop screw 2	Stop screw 1
4008E (ER11)	<b>84 950 ...</b>	<b>84 950 ...</b>	<b>83 950 ...</b>	<b>83 950 ...</b>
426E (ER16)	<b>035</b>	<b>034</b>	<b>340</b>	<b>336</b>
		<b>041</b>	<b>341</b>	<b>337</b>
		M8x1 - SW4	M8x1 - SW4	
		M11x1 - SW6	M11x1 - SW6	

**Accessories**


ER collet	Sealing ring	Device	Roll key	Roll key device	Pull studs	Others
→ 268-276, 279	→ 280	→ 285	→ 286	→ 286	→ 58, 60	→ 284

# ER precision collet chuck – HDC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

### Scope of supply:

Base body including lock nut, without backstop screw

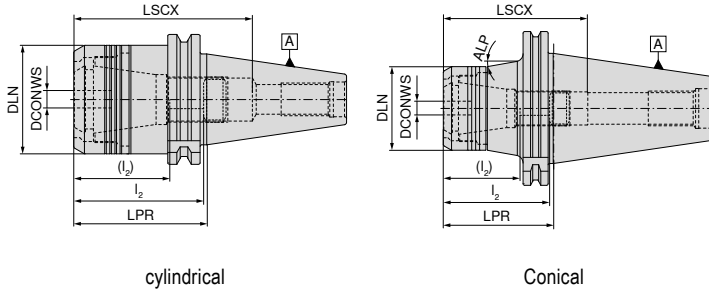

AD  
G 6,3  $\sigma_{max}$  18000

cylindrical

84 400 ...



AD  
G 6,3  $\sigma_{max}$  18000

conical

84 400 ...

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	ALP °	for collet
SK 40	2 - 20	65	53	85	41 - 65 (27 - 47)		470E (ER32)
SK 50	2 - 20	70	53	91	41 - 71 (27 - 53)	10	470E (ER32)
SK 50	2 - 20	100	53	121	41 - 74 (27 - 56)	10	470E (ER32)

→ Transmittable torque moments, Page 313






LSCX = Clamping depth without backstop screw  
 $l_2$  = Clamping depth backstop screw 1, dimension in brackets ( $l_2$ ) = Clamping depth backstop screw 2






### Spare parts

DCONWS

2 - 20

		
Lock nut	Stop screw 2	Stop screw 1
84 950 ...	83 950 ...	83 950 ...
30100	M22x1,5 - SW6	402
		M22x1,5 - SW6
		401

### Accessories

				
ER collet	Roll key	Roll key device	Pull studs	Others
→ 268-276, 278-279	→ 286	→ 286	→ 58, 60	→ 284




# HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ Also available with Balluff chip on request

### Scope of supply:

Base body with backstop screw and pressure screw

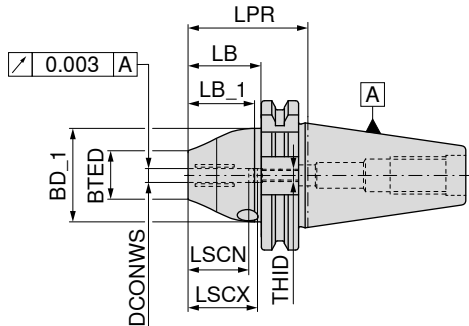

**NEW**



AD/B  
G 2,5 n<sub>max</sub> 25000

**84 254 ...**

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	
SK 40	6	50,0	26	42	27,1	30,9	37	27	M5	10679
SK 40	8	50,0	28	42	27,1	30,9	37	27	M6	10879
SK 40	10	50,0	30	42	27,1	30,9	41	31	M8x1	11079
SK 40	12	50,0	32	49	27,1	30,9	46	36	M10x1	11279
SK 40	16	64,5	38	49	41,6	45,4	49	39	M12x1	11679
SK 40	20	64,5	38	49	41,6	45,4	51	41	M16x1	12079

→ Min. clamping depth, Page 312




Clamping key – T

**80 397 ...**



Pressure screw

**83 950 ...**



Stop screw IK

**83 950 ...**

### Spare parts

DCONWS					
6	SW5	050	M10x12	55000	M5x12,5 - SW2,5 418
8	SW5	050	M10x12	55000	M6x12,5 - SW3 419
10	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
12	SW5	050	M10x12	55000	M10x1x13,5 - SW5 421
16	SW5	050	M10x12	55000	M12x1x13,5 - SW5 422
20	SW5	050	M10x12	55000	M16x1x13,5 - SW8 424

### Accessories


Reduction sleeve	Pull studs	Others
→ 282	→ 58, 60	→ 284

# HyPower – Complus

- ▲ High pressure chuck, short and stable version
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

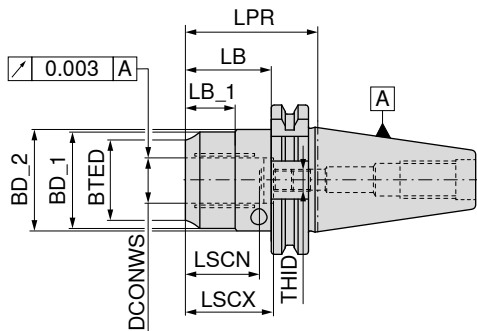


AD/B  
G 2,5 n<sub>max</sub> 25000

**83 427 ...**

Adapter	DCONWS	LPR	BTED	BD_1	BD_2	LB	LB_1	LSCX	LSCN	THID	
	mm	mm	mm	mm	mm	mm	mm	mm	mm		
SK 40	20	64,5	38					51	40	M16x1x13,5	120
SK 40	32	81,0	57	63	70	61,9	26	61	51	M16x1x13,5	13279
SK 50	20	64,5	38	49		45,4		51	41	M16x1x13,5	12078
SK 50	32	81,0	57	68	72	61,9	35	61	51	M16x1x13,5	13278

→ Min. clamping depth, Page 312




**83 950 ...**



**80 397 ...**



**83 950 ...**



**83 950 ...**

### Spare parts for Article no.

83 427 13279	M5x5 - SW2,5	157	SW5	050	M10x1x14	429	M16x1x13,5 - SW8	424
83 427 12078	M5x5 - SW2,5	157	SW5	050	M10x1x14	429	M16x1x13,5 - SW8	424
83 427 13278	M5x5 - SW2,5	157	SW5	050	M10x1x14	429	M16x1x13,5 - SW8	424

### Accessories


Reduction sleeve	Pull studs	Others
→ 282	→ 58, 60	→ 284

# HyPower – Access 3°

- ▲ High pressure chuck, slim 3°
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw, pressure screw and screw plug

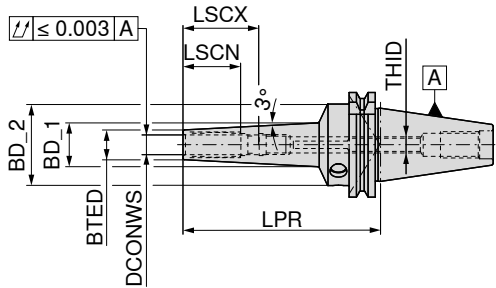

AD/B  
G 2,5 n<sub>max</sub> 25000

**83 421 ...**

	Adapter	DCONWS	LPR	BTED	BD_1	BD_2	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm	mm	mm	
medium length	SK 40	3	120	9	17,40	49,5	28	12	M3	103
	SK 40	4	120	10	18,40	49,5	28	16	M3	104
	SK 40	5	120	11	19,40	49,5	28	20	M3	105
	SK 40	6	120	12	20,40	49,5	37	27	M5	106
	SK 40	8	120	14	22,40	49,5	37	27	M6	108
	SK 40	10	120	16	24,50	49,5	41	31	M8x1	110
	SK 40	12	120	18	26,60	49,5	46	36	M10x1	112
	SK 40	16	120	24	32,30	49,5	49	39	M12x1	116
	SK 40	20	120	28	36,40	49,5	51	41	M16x1	120
	SK 40	6	160	16	34,37	49,5	37	27	M5	206
	SK 40	8	160	18	35,45	49,5	37	27	M6	208
	SK 40	10	160	20	37,10	49,5	41	31	M8x1	210
	SK 40	12	160	22	38,72	49,5	46	36	M10x1	212
	SK 40	6	200	16	38,72	49,5	37	27	M5	306
	SK 40	8	200	18	39,74	49,5	37	27	M6	308
	SK 40	10	200	20	41,40	49,5	41	31	M8x1	310
SK 40	12	200	22	43,02	49,5	46	36	M10x1	312	


→ Min. clamping depth, Page 312



Cylindrical screw



Clamping key – T



Pressure screw



Stop screw IK

**83 950 ...**

**80 397 ...**

**83 950 ...**

**83 950 ...**

### Spare parts for Article no.



83 421 103	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
83 421 104	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
83 421 105	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
83 421 106	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
83 421 108	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
83 421 110	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 421 112	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M10x1x13,5 - SW5	421
83 421 116	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M12x1x13,5 - SW5	422
83 421 120	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M16x1x13,5 - SW8	424
83 421 206	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
83 421 208	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
83 421 210	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 421 212	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 421 306	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
83 421 308	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
83 421 310	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 421 312	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420

# HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ Also available with Balluff chip on request

### Scope of supply:

Base body with backstop screw and pressure screw

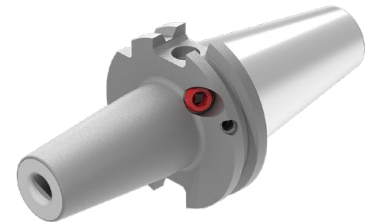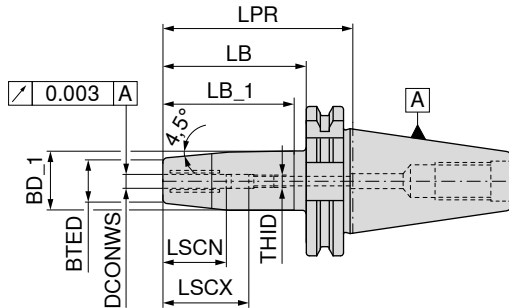

AD/B  
G 2,5 n<sub>max</sub> 25000

**84 255 ...**


Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	
SK 40	6	80	21	27	55,7	60,9	37	27	M5	10679
SK 40	8	80	21	27	55,7	60,9	37	27	M6	10879
SK 40	10	80	24	32	55,7	60,9	41	31	M8x1	11079
SK 40	12	80	24	32	55,7	60,9	46	36	M10x1	11279
SK 40	16	80	27	34	55,8	60,9	49	39	M12x1	11679
SK 40	20	80	33	42	57,2	60,9	51	41	M16x1	12079

→ Min. clamping depth, Page 312




Clamping key – T

**80 397 ...**



Pressure screw

**83 950 ...**



Stop screw IK

**83 950 ...**

### Spare parts

DCONWS					
6	SW5	050	M10x12	55000	M5x12,5 - SW2,5 418
8	SW5	050	M10x12	55000	M6x12,5 - SW3 419
10	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
12	SW5	050	M10x12	55000	M10x1x13,5 - SW5 421
16	SW5	050	M10x12	55000	M12x1x13,5 - SW5 422
20	SW5	050	M10x12	55000	M16x1x13,5 - SW8 424

### Accessories

Reduction sleeve	Pull studs	Others
→ 282	→ 58, 60	→ 284




# HyTens – Fit

- ▲ Hydraulic chuck, short and slim version
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

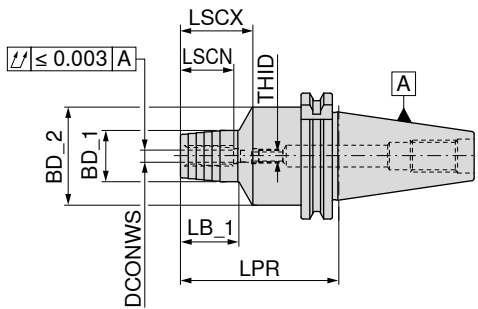

AD/B  
G 2,5 n<sub>max</sub> 25000


**83 402 ...**

Adapter	DCONWS	LPR	BD_1	BD_2	LSCX	LSCN	LB_1	THID	
	mm	mm	mm	mm	mm	mm	mm	mm	
SK 40	6	80,5	26	49,5	37	27	29,5	M5	106
SK 40	8	80,5	28	49,5	37	27	30,0	M6	108
SK 40	10	80,5	30	49,5	41	31	35,0	M8x1	110
SK 40	12	80,5	32	49,5	46	36	40,0	M10x1	112
SK 40	16	80,5	38	49,5	49	39	45,0	M12x1	116
SK 40	20	80,5	42	49,5	51	41	47,0	M16x1	120
SK 40	25	80,5	55	63,0	57	47	28,0	M16x1	125
SK 40	32	80,5	63	70,0	61	51	25,5	M16x1	132
SK 50	6	80,5	26	49,5	37	27	29,5	M5	306
SK 50	8	80,5	28	49,5	37	27	30,0	M6	308
SK 50	10	80,5	30	49,5	41	31	35,0	M8x1	310
SK 50	12	80,5	32	49,5	46	36	40,0	M10x1	312
SK 50	16	80,5	38	49,5	49	39	45,0	M12x1	316
SK 50	20	80,5	42	49,5	51	41	42,0	M16x1	320
SK 50	25	100,0	55	63,0	57	47	48,0	M16x1	325
SK 50	32	100,0	63	70,0	61	51	51,0	M16x1	332


→ Min. clamping depth, Page 312



Pressure screw



Stop screw IK



Stop screw IK

**83 950 ...**

**83 950 ...**

**83 950 ...**

### Spare parts

DCONWS			
6	M8x1x10	439	M5x12,5 - SW2,5
8	M8x1x10	439	M6x12,5 - SW3
10	M10x1x12	440	M8x1x13,5 - SW3
12	M10x1x12	440	M10x1x13,5 - SW5
16	M10x1x12	440	M12x1x13,5 - SW5
20 - 32	M10x1x12	440	M16x1x13,5 - SW8

### Accessories



Reduction sleeve	Pull studs	Others
→ 282	→ 58, 60	→ 284

# HyTens – Compact

- ▲ Hydraulic chuck, short and stable version
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

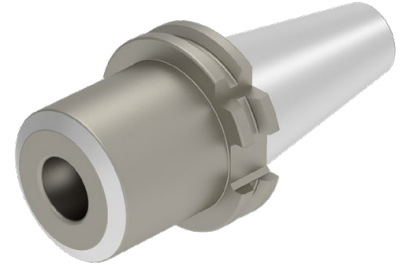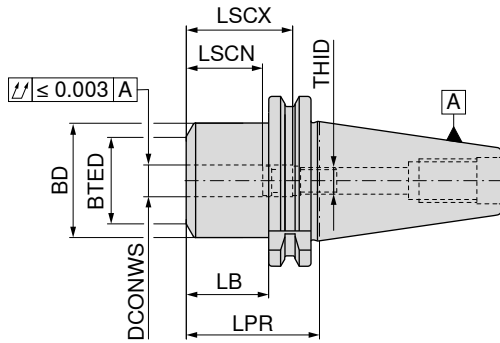

AD  
G 2,5  $n_{max}$  25000

<b>83 430 ...</b>
<b>01279</b>
<b>02079</b>
<b>02078</b>

Adapter	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCN mm	LSCX mm	THID
SK 40	12	50,0	42	32	31,0	46	56	M8x1
SK 40	20	64,5	49	38	45,5	41	51	M16x1
SK 50	20	64,5	49	38	45,5	41	51	M16x1


→ Min. clamping depth, Page 312



**80 397 ...**



**83 950 ...**



**83 950 ...**


### Spare parts

DCONWS						
12	SW5	<b>050</b>	M10x1x12	<b>440</b>	M8x1x13,5 - SW3	<b>420</b>
20	SW5	<b>050</b>	M10x1x12	<b>440</b>	M16x1x13,5 - SW8	<b>424</b>

# Heat shrink adapter, slim 3°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip on request

TG

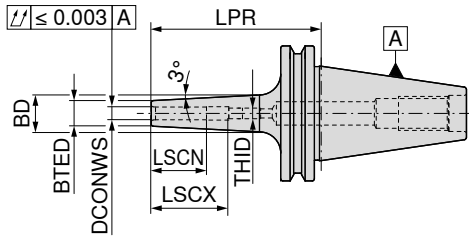


AD/B  
G 2,5 n<sub>max</sub> 25000

84 320 ...

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm		
short	SK 40	3	80	9	14	28	12	M6	103
	SK 40	4	80	10	15	28	16	M6	104
	SK 40	5	80	11	16	30	20	M6	105
	SK 40	6	80	12	17	36	26	M5	106
	SK 40	8	80	14	19	36	26	M6	108
	SK 40	10	80	16	21	41	31	M8x1	110
	SK 40	12	80	18	23	47	37	M10x1	112
	SK 40	14	80	20	26	47	37	M10x1	114
	SK 40	16	80	22	28	50	40	M12x1	116
	SK 40	18	80	24	30	50	40	M12x1	118
SK 40	20	80	26	32	52	42	M16x1	120	
medium length	SK 40	3	120	9	16	12	12		203
	SK 40	4	120	10	17	16	16		204
	SK 40	5	120	11	18	20	20		205
	SK 40	6	120	12	22	36	26	M5	206
	SK 40	8	120	14	24	36	26	M6	208
	SK 40	10	120	16	26	41	31	M8x1	210
	SK 40	12	120	18	28	47	37	M10x1	212
	SK 40	14	120	20	30	47	37	M10x1	214
	SK 40	16	120	22	32	50	40	M12x1	216
	SK 40	18	120	24	34	50	40	M12x1	218
SK 40	20	120	26	36	52	42	M16x1	220	
extra-long	SK 40	3	160	9	19	12	12		303
	SK 40	4	160	10	20	16	16		304
	SK 40	5	160	11	21	20	20		305
	SK 40	6	160	12	24	36	26	M5	306
	SK 40	8	160	14	26	36	26	M6	308
	SK 40	10	160	16	28	41	31	M8x1	310
	SK 40	12	160	18	30	47	37	M10x1	312
	SK 40	14	160	20	32	47	37	M10x1	314
	SK 40	16	160	22	34	50	40	M12x1	316
	SK 40	18	160	24	36	50	40	M12x1	318
SK 40	20	160	26	38	52	42	M16x1	320	

→ Min. clamping depth, Page 312



Stop screw IK



Stop screw IK

83 950 ...

83 950 ...



Spare parts  
DCONWS

3 - 5	M6x14 - SW2	417	
6			M5x12,5 - SW2,5 418
8			M6x12,5 - SW3 419
10			M8x1x13,5 - SW3 420
12 - 14			M10x1x13,5 - SW5 421
16 - 18			M12x1x13,5 - SW5 422
20			M16x1x13,5 - SW8 424

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip on request

TG

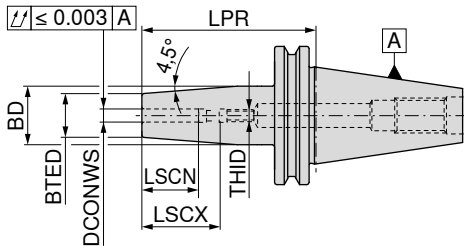

AD/B  
G 2,5 n<sub>max</sub> 25000

84 300 ...


	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	
short	SK 40	3	80	10	17	22	12	M6	103
	SK 40	4	80	15	22	26	16	M6	104
	SK 40	5	80	15	22	30	20	M6	105
	SK 40	6	80	21	27	36	26	M5	106
	SK 40	8	80	21	27	26	26	M6	108
	SK 40	10	80	24	32	41	31	M8x1	110
	SK 40	12	80	24	32	47	37	M10x1	112
	SK 40	14	80	27	34	47	37	M10x1	114
	SK 40	16	80	27	34	50	40	M12x1	116
	SK 40	18	80	33	42	50	40	M12x1	118
	SK 40	20	80	33	42	52	42	M16x1	120
SK 40	25	100	44	53	58	48	M16x1	125	
medium length	SK 40	3	120	10	20	12	12		203
	SK 40	4	120	15	22	16	16		204
	SK 40	5	120	15	22	20	20		205
	SK 40	6	120	21	27	36	26	M5	206
	SK 40	8	120	21	27	36	26	M6	208
	SK 40	10	120	24	32	41	31	M8x1	210
	SK 40	12	120	24	32	47	37	M10x1	212
	SK 40	14	120	27	34	47	37	M10x1	214
	SK 40	16	120	27	34	50	40	M12x1	216
	SK 40	18	120	33	42	50	40	M12x1	218
	SK 40	20	120	33	42	52	42	M16x1	220
SK 40	25	120	44	53	58	48	M16x1	225	
extra-long	SK 40	3	160	10	20	12	12		303
	SK 40	4	160	15	22	16	16		304
	SK 40	5	160	15	22	20	20		305
	SK 40	6	160	21	27	36	26	M5	306
	SK 40	8	160	21	27	36	26	M6	308
	SK 40	10	160	24	32	41	31	M8x1	310
	SK 40	12	160	24	32	47	37	M10x1	312
	SK 40	14	160	27	34	47	37	M10x1	314
	SK 40	16	160	27	34	50	40	M12x1	316
	SK 40	18	160	33	42	50	40	M12x1	318
	SK 40	20	160	33	42	52	42	M16x1	320
SK 40	25	160	44	53	58	48	M16x1	325	

→ Min. clamping depth, Page 312

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip on request

TG



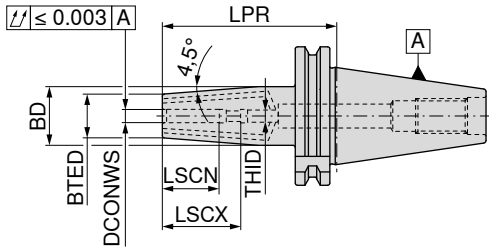


AD/B – 2KMB  
G 2,5 n<sub>max</sub> 25000

84 317 ...

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	
short	SK 40	3	80	10	17	28	12	M6	103
	SK 40	4	80	15	22	28	16	M6	104
	SK 40	5	80	15	22	30	20	M6	105
	SK 40	6	80	21	27	36	26	M5	106
	SK 40	8	80	21	27	36	26	M6	108
	SK 40	10	80	24	32	41	31	M8x1	110
	SK 40	12	80	24	32	47	37	M10x1	112
	SK 40	14	80	27	34	47	37	M10x1	114
	SK 40	16	80	27	34	50	40	M12x1	116
	SK 40	18	80	33	42	50	40	M12x1	118
	SK 40	20	80	33	42	52	42	M16x1	120
	SK 40	25	100	44	53	58	48	M16x1	125
SK 40	32	100	44	53	62	52	M16x1	132	

→ Min. clamping depth, Page 312



83 950 ...

83 950 ...

83 950 ...

Spare parts  
DCONWS

3 - 5	M6x14 - SW2	417		M2x6	512	
6			M5x12,5 - SW2,5	418	M2x6	512
8			M6x12,5 - SW3	419	M2x6	512
10			M8x1x13,5 - SW3	420	M2x6	512
12 - 14			M10x1x13,5 - SW5	421	M2x6	512
16 - 18			M12x1x13,5 - SW5	422	M2x6	512
20 - 25			M16x1x13,5 - SW8	424	M2x6	512
32	M16x1 - SW5	511		M2x6	512	


Accessories

Shrink fit extension	Pull studs	Others
→ 247	→ 58, 60	→ 284

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip on request

TG

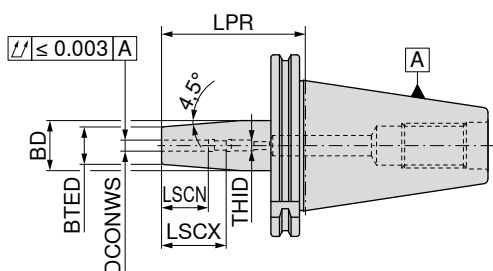


AD/B  
G 2,5 n<sub>max</sub> 25000

84 301 ...

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm	mm	
short	SK 50	6	80	21	27	36	26	M5	106
	SK 50	8	80	21	27	36	26	M6	108
	SK 50	10	80	24	32	41	31	M8x1	110
	SK 50	12	80	24	32	47	37	M10x1	112
	SK 50	14	80	27	34	47	37	M10x1	114
	SK 50	16	80	27	34	50	40	M12x1	116
	SK 50	18	80	33	42	50	40	M12x1	118
	SK 50	20	80	33	42	52	42	M16x1	120
	SK 50	25	100	44	53	58	48	M16x1	125
	SK 50	32	100	44	53	62	52	M16x1	132
medium length	SK 50	6	120	21	27	36	26	M5	206
	SK 50	8	120	21	27	36	26	M6	208
	SK 50	10	120	24	32	41	31	M8x1	210
	SK 50	12	120	24	32	47	37	M10x1	212
	SK 50	14	120	27	34	47	37	M10x1	214
	SK 50	16	120	27	34	50	40	M12x1	216
	SK 50	18	120	33	42	50	40	M12x1	218
	SK 50	20	120	33	42	52	42	M16x1	220
	SK 50	25	120	44	53	58	48	M16x1	225
	SK 50	32	120	44	53	62	52	M16x1	232
extra-long	SK 50	6	160	21	27	36	26	M5	306
	SK 50	8	160	21	27	36	26	M6	308
	SK 50	10	160	24	32	41	31	M8x1	310
	SK 50	12	160	24	32	47	37	M10x1	312
	SK 50	14	160	27	34	47	37	M10x1	314
	SK 50	16	160	27	34	50	40	M12x1	316
	SK 50	18	160	33	42	50	40	M12x1	318
	SK 50	20	160	33	42	52	42	M16x1	320
	SK 50	25	160	44	53	58	48	M16x1	325
	SK 50	32	160	44	53	62	52	M16x1	332

→ Min. clamping depth, Page 312



Spare parts  
DCONWS

6	M5x12,5 - SW2,5	418
8	M6x12,5 - SW3	419
10	M8x1x13,5 - SW3	420
12 - 14	M10x1x13,5 - SW5	421
16 - 18	M12x1x13,5 - SW5	422
20 - 32	M16x1x13,5 - SW8	424


# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip on request

**Scope of supply:**

Holder **without** backstop screw

**TG**

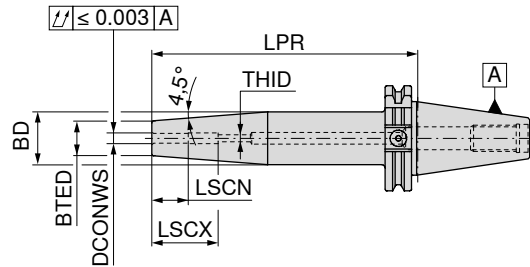

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 310 ...**

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID		
short	SK 40	3	70	12	17,0				10379	
	SK 40	4	70	12	17,0				10479	
	SK 40	5	70	12	17,0				10579	
	SK 40	6	80	21	30,5	36	26	M5	10679	
	SK 40	8	80	21	30,5	36	26	M6	10879	
	SK 40	10	80	24	33,5	41	31	M8x1	11079	
	SK 40	12	80	24	33,5	47	37	M10x1	11279	
	SK 40	14	80	27	36,5	47	37	M10x1	11479	
	SK 40	16	80	27	36,5	50	40	M12x1	11679	
	SK 40	18	80	33	42,5	50	40	M12x1	11879	
	SK 40	20	80	33	42,5	52	42	M16x1	12079	
	SK 40	25	100	44	50,0	58	48	M16x1	12579	
		SK 50	6	80	21	27,0	36	26	M5	10678
		SK 50	8	80	21	27,0	36	26	M6	10878
		SK 50	10	80	24	32,0	41	31	M8x1	11078
		SK 50	12	80	24	32,0	47	37	M10x1	11278
		SK 50	14	80	27	34,0	47	37	M10x1	11478
		SK 50	16	80	27	34,0	50	40	M12x1	11678
	SK 50	18	80	33	42,0	50	40	M12x1	11878	
	SK 50	20	80	33	42,0	52	42	M12x1	12078	
	SK 50	25	100	44	53,0	58	48	M16x1	12578	
	SK 50	32	100	44	53,0	62	52	M16x1	13278	
medium length	SK 40	3	120	12	17,0				20379	
	SK 40	4	120	12	17,0				20479	
	SK 40	5	120	12	17,0				20579	
	SK 40	6	120	21	31,0	36	26	M5	20679	
	SK 40	8	120	21	32,0	36	26	M6	20879	
	SK 40	10	120	24	34,0	41	31	M8x1	21079	
	SK 40	12	120	24	34,0	47	37	M10x1	21279	
	SK 40	16	120	27	36,0	50	40	M12x1	21679	
	SK 40	20	120	33	44,0	52	42	M16x1	22079	
		SK 50	6	120	21	27,0	36	26	M5	20678
		SK 50	8	120	21	27,0	36	26	M6	20878
		SK 50	10	120	24	32,0	41	31	M8x1	21078
		SK 50	12	120	24	32,0	47	37	M10x1	21278
		SK 50	14	120	27	34,0	47	37	M10x1	21478
		SK 50	16	120	27	34,0	50	40	M12x1	21678
		SK 50	18	120	33	42,0	50	40	M12x1	21878
		SK 50	20	120	33	42,0	52	42	M16x1	22078
		SK 50	25	120	44	53,0	58	48	M16x1	22578
		SK 50	32	120	44	53,0	62	52	M16x1	23278

→ Min. clamping depth, Page 312




# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Holder **without** backstop screw

**TG**

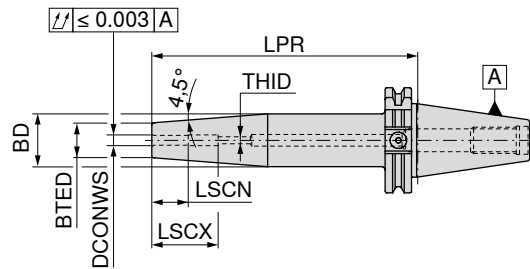

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 310 ...**

Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID		
extra-long	SK 40	6	160	21	31,0	36	26	M5	30679
	SK 40	8	160	21	32,0	36	26	M6	30879
	SK 40	10	160	24	34,0	41	31	M8x1	31079
	SK 40	12	160	24	34,0	47	37	M10x1	31279
	SK 40	14	160	27	36,0	47	37	M10x1	31479
	SK 40	16	160	27	36,0	50	40	M12x1	31679
	SK 40	18	160	33	44,0	50	40	M12x1	31879
	SK 40	20	160	33	44,0	52	42	M16x1	32079
	SK 40	25	160	44	50,0	58	48	M16x1	32579
	SK 50	6	160	21	27,0	36	26	M5	30678
	SK 50	8	160	21	27,0	36	26	M6	30878
	SK 50	10	160	24	32,0	41	31	M8x1	31078
	SK 50	12	160	24	32,0	47	37	M10x1	31278
	SK 50	14	160	27	34,0	47	37	M10x1	31478
	SK 50	16	160	27	34,0	50	40	M12x1	31678
	SK 50	18	160	33	42,0	50	40	M12x1	31878
SK 50	20	160	33	42,0	52	42	M16x1	32078	
SK 50	25	160	44	53,0	58	48	M16x1	32578	
SK 50	32	160	44	53,0	62	52	M16x1	33278	

→ Min. clamping depth, Page 312



Stop screw IK

**82 950 ...**


**Spare parts**

**DCONWS**

6	M5x16 - SW2,5	30000
8	M6x16 - SW3	30100
10	M8x1x16 - SW4	30200
12	M10x1x14 - SW5	30300
14	M10x1x14 - SW5	30300
16	M12x1x16 - SW6	30400
18	M12x1x16 - SW6	30400
20	M16x1x16 - SW8	30500
25	M16x1x16 - SW8	30500
32	M16x1x16 - SW8	30500

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

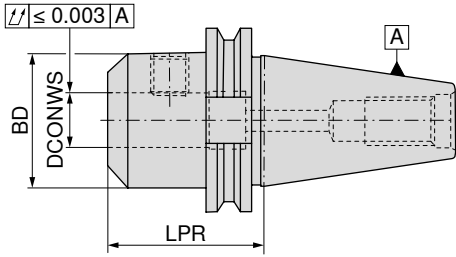

AD  
G 2,5 n<sub>max</sub> 25000

82 741 ...

	Adapter	DCONWS <sub>H4</sub> mm	LPR mm	BD mm	
short	SK 30	6	50	25	10680
	SK 30	8	50	28	10880
	SK 30	10	50	35	11080
	SK 30	12	50	42	11280
	SK 30	14	63	44	11480
	SK 30	16	63	48	11680
	SK 30	18	63	50	11880
	SK 30	20	70	52	12080
extra short	SK 40	16	35	48	01679
	SK 40	20	35	50	02079
	SK 40	25	40	50	02579
	SK 40	32	75	72	03279 <sup>1)</sup>

1) Version with two grub screws

SK 50 adapters and other lengths can be found on the next 2 pages



62 950 ...

### Spare parts



DCONWS		
6	M6x10	006
8	M8x10	008
10	M10x12	010
12	M12x16	012
14	M12x16	012
16	M14x16	016
18	M14x16	016
20	M16x16	020
25	M18x2x20	025
32	M20x2x20	032

### Accessories

Coolant transfer pipe	Others
→ 156	→ 284

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

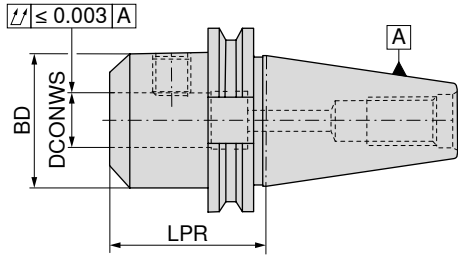

AD/B  
G 2,5 n<sub>max</sub> 25000


**82 740 ...**

	Adapter	DCONWS <sub>H4</sub> mm	LPR mm	BD mm		
short	SK 40	6	50	25	10679	
	SK 40	8	50	28	10879	
	SK 40	10	50	35	11079	
	SK 40	12	50	42	11279	
	SK 40	14	50	44	11479	
	SK 40	16	63	48	11679	
	SK 40	18	63	50	11879	
	SK 40	20	63	52	12079	
	SK 40	25	100	65	12579 <sup>1)</sup>	
	SK 40	32	100	72	13279 <sup>1)</sup>	
	SK 40	40	120	80	14079 <sup>1)</sup>	
short	SK 50	6	63	25	10678	
	SK 50	8	63	28	10878	
	SK 50	10	63	35	11078	
	SK 50	12	63	42	11278	
	SK 50	14	63	44	11478	
	SK 50	16	63	48	11678	
	SK 50	18	63	50	11878	
	SK 50	20	63	52	12078	
	SK 50	25	80	65	12578 <sup>1)</sup>	
	SK 50	32	100	72	13278 <sup>1)</sup>	
	SK 50	40	100	80	14078 <sup>1)</sup>	
medium length	SK 40	6	100	25	20679	
	SK 40	8	100	28	20879	
	SK 40	10	100	35	21079	
	SK 40	12	100	42	21279	
	SK 40	14	100	44	21479	
	SK 40	16	100	48	21679	
	SK 40	18	100	50	21879	
	SK 40	20	100	52	22079	
		SK 50	6	100	25	20678
		SK 50	8	100	28	20878
	SK 50	10	100	35	21078	
	SK 50	12	100	42	21278	
	SK 50	14	100	44	21478	
	SK 50	16	100	48	21678	
	SK 50	18	100	50	21878	
	SK 50	20	100	52	22078	
	SK 50	25	100	65	22578 <sup>1)</sup>	

1) Version with two grub screws

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

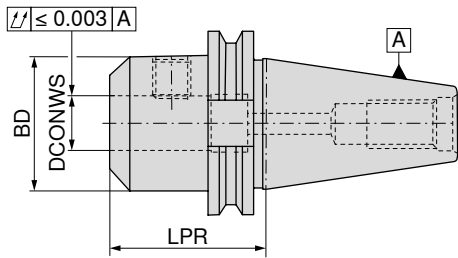

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 740 ...**

	Adapter	DCONWS <sub>H4</sub> mm	LPR mm	BD mm	
long	SK 40	6	130	25	30679
	SK 40	8	130	28	30879
	SK 40	10	130	35	31079
	SK 40	12	130	42	31279
	SK 40	14	130	44	31479
	SK 40	16	130	48	31679
	SK 40	18	130	50	31879
	SK 40	20	130	52	32079
	SK 50	6	130	25	30678
	SK 50	8	130	28	30878
	SK 50	10	130	35	31078
	SK 50	12	130	42	31278
	SK 50	14	130	44	31478
	SK 50	16	130	48	31678
	SK 50	18	130	50	31878
	SK 50	20	130	52	32078
	SK 50	25	130	65	32578 <sup>1)</sup>
	extra-long	SK 40	6	160	25
SK 40		8	160	28	40879
SK 40		10	160	35	41079
SK 40		12	160	42	41279
SK 40		14	160	44	41479
SK 40		16	160	48	41679
SK 40		18	160	50	41879
SK 40		20	160	52	42079
SK 40		25	160	65	42579 <sup>1)</sup>
SK 50		6	160	25	40678
SK 50		8	160	28	40878
SK 50		10	160	35	41078
SK 50		12	160	42	41278
SK 50		14	160	44	41478
SK 50		16	160	48	41678
SK 50		18	160	50	41878
SK 50		20	160	52	42078
SK 50		25	160	65	42578 <sup>1)</sup>
SK 50		32	160	72	43278 <sup>1)</sup>



1) Version with two grub screws

The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

Spare parts and accessories on → **Page 34.**

# Cylindrical Shank Adapter (Whistle Notch)

- ▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
- ▲ The groove in the flat face is a characteristic feature of the Whistle Notch version
- ▲ also available with Balluff chip **on request**

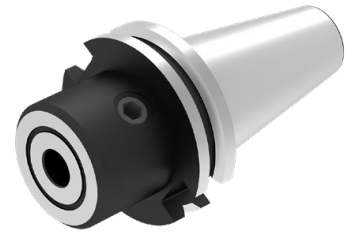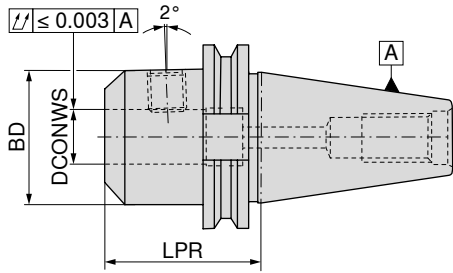

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 742 ...**

	Adapter	DCONWS <sub>H4</sub> mm	LPR mm	BD mm	
short	SK 40	6	50	25	10679
	SK 40	8	50	28	10879
	SK 40	10	50	35	11079
	SK 40	12	50	42	11279
	SK 40	14	50	44	11479
	SK 40	16	63	48	11679
	SK 40	18	63	50	11879
	SK 40	20	63	52	12079
	SK 40	25	100	65	12579 <sup>1)</sup>
	SK 40	32	100	72	13279 <sup>1)</sup>
	SK 50	6	63	25	10678
	SK 50	8	63	28	10878
	SK 50	10	63	35	11078
	SK 50	12	63	42	11278
	SK 50	14	63	44	11478
	SK 50	16	63	48	11678
	SK 50	18	63	50	11878
	SK 50	20	63	52	12078
SK 50	25	80	65	12578 <sup>1)</sup>	
SK 50	32	100	72	13278 <sup>1)</sup>	
long	SK 40	6	130	25	30679
	SK 40	8	130	28	30879
	SK 40	10	130	35	31079
	SK 40	12	130	42	31279
	SK 40	16	130	48	31679
	SK 40	20	130	52	32079
	SK 40	25	130	65	32579 <sup>1)</sup>
	SK 50	6	130	25	30678
	SK 50	8	130	28	30878
	SK 50	10	130	35	31078
	SK 50	12	130	42	31278
	SK 50	16	130	48	31678
	SK 50	20	130	52	32078
	SK 50	25	130	65	32578 <sup>1)</sup>
	SK 50	32	130	72	33278 <sup>1)</sup>

1) Version with two grub screws

## Spare parts cylindrical shank adaptors (Weldon and Whistle Notch)


	Adjustment screw	Clamping screw	Grubscrew	Backstop screw
	10 950 ...	62 950 ...	62 950 ...	84 950 ...
<b>Spare parts</b>				
<b>DCONWS<sub>H4</sub></b>				
6			M6x10	006 M5x20
8			M8x10	008 M6x20
10			M10x12	010 M8x16
12 - 14	M10X20 DIN 913		M12x16	012
16 - 18			M14x16	016 M12x20
20		M16x20 - SW8	M16x16	020
25			M18x2x20	025 M20x24
32			M20x2x20	032 M20x24
	17500	51200		44100
				21500
				44200
				44300
				44000
				44000

### Accessories

	
Pull studs	Others
→ 58, 60	→ 284

# Indexable insert drill adapter ISO 7388-1 SK

▲ also available with Balluff chip on request

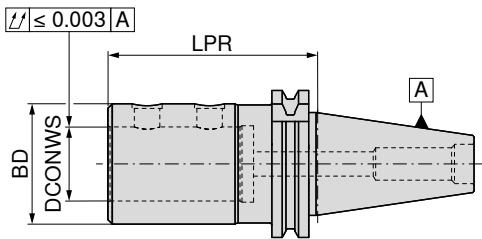

AD/B  
G 6,3 n<sub>max</sub> 15000

82 748 ...

Adapter	DCONWS mm	LPR mm	BD mm	
SK 40	20	80	40	12079
SK 40	25	85	45	12579
SK 40	32	90	52	13279
SK 50	20	80	40	12078
SK 50	25	85	45	12578
SK 50	32	90	52	13278
SK 50	40	90	65	14078
SK 50	50	100	75	15078

Suitable eccentric sleeves can be found in → **Chapter 3, Indexable insert drilling.**



Grubscrew

10 950 ...

## Spare parts

DCONWS		
20	M10x1x10	001
25 - 32	M12x1x10	002
40 - 50	M16x1x12	003

## Accessories

Pull studs	Others
→ 58, 60	→ 284




# ER Precision Collet chuck – PCC

- ▲ For standard or sealing disc lock nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 100$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with lock nut and backstop screw

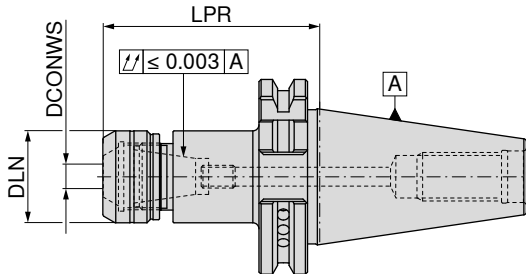

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 700 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	for collet	
<b>SK 40</b>	1 - 10	70	30	426E (ER16)	<b>11079</b>
<b>SK 40</b>	1 - 10	100	30	426E (ER16)	<b>21079</b>
<b>SK 40</b>	2 - 16	70	40	430E (ER25)	<b>11679</b>
<b>SK 40</b>	2 - 16	100	40	430E (ER25)	<b>21679</b>
<b>SK 40</b>	2 - 20	70	50	470E (ER32)	<b>12079</b>
<b>SK 40</b>	2 - 20	100	50	470E (ER32)	<b>22079</b>
<b>SK 50</b>	2 - 16	70	40	430E (ER25)	<b>11678</b>
<b>SK 50</b>	2 - 16	100	40	430E (ER25)	<b>21678</b>
<b>SK 50</b>	2 - 20	70	50	470E (ER32)	<b>12078</b>
<b>SK 50</b>	2 - 20	100	50	470E (ER32)	<b>22078</b>

Dimension LPR is 4.5 mm longer for ER16 and ER32 and 5.0 mm longer for ER25 when using thro' coolant lock nut

	Lock nut IK	Lock nut	Backstop screw PCC 2	Backstop screw PCC 1
<b>82 950 ...</b>	<b>11000</b>	<b>01000</b>	<b>00200</b>	<b>00100</b>
	<b>11600</b>	<b>01600</b>	<b>00200</b>	<b>00300</b>
	<b>12000</b>	<b>02000</b>	<b>00200</b>	<b>00300</b>

### Spare parts for collet

426E (ER16)  
430E (ER25)  
470E (ER32)

### Accessories



ER collet	Sealing ring	Roll key
→ 268-276, 278-279	→ 281	→ 286

# ER Collet chuck

▲ also available with Balluff chip on request

## Scope of supply:

Holder with lock nut and adjustable back stop

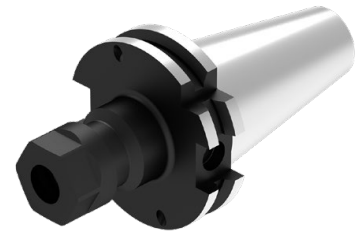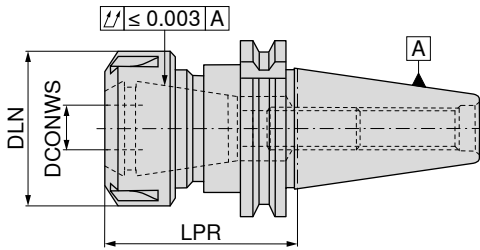

AD  
G 2,5 n<sub>max</sub> 25000

82 743 ...











AD/B  
G 2,5 n<sub>max</sub> 25000


82 743 ...

	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet		
short	SK 30	1 - 10	70	28	8 - 56	426E (ER16)		11080 <sup>1)</sup>
	SK 30	1 - 16	70	42	24 - 104	430E (ER25)		11680
	SK 30	2 - 20	70	50	24 - 136	470E (ER32)		12080
	SK 40	1 - 10	60	22	8 - 56	426E (ER16 mini)		11179
	SK 40	1 - 10	60	28	8 - 56	426E (ER16)		11079 <sup>1)</sup>
	SK 40	1 - 16	70	42	24 - 104	430E (ER25)		11679
	SK 40	2 - 20	70	50	24 - 136	470E (ER32)		12079
	SK 40	3 - 26	70	63	176	472E (ER40)		12679
	SK 50	1 - 10	60	28	8 - 56	426E (ER16)		11078 <sup>1)</sup>
	SK 50	1 - 16	70	42	24 - 104	430E (ER25)		11678
	SK 50	2 - 20	70	50	24 - 136	470E (ER32)		12078
	SK 50	3 - 26	70	63	176	472E (ER40)		12678
medium length	SK 30	1 - 10	100	28	8 - 56	426E (ER16)		21080 <sup>1)</sup>
	SK 30	1 - 16	100	42	24 - 104	430E (ER25)		21680
	SK 30	2 - 20	100	50	24 - 136	470E (ER32)		22080
	SK 40	1 - 10	120	28	8 - 56	426E (ER16)		21079 <sup>1)</sup>
	SK 40	1 - 10	120	22	8 - 56	426E (ER16 mini)		21179
	SK 40	1 - 16	120	42	24 - 104	430E (ER25)		21679
	SK 40	2 - 20	120	50	24 - 136	470E (ER32)		22079
	SK 40	3 - 26	100	63	176	472E (ER40)		22679
	SK 50	1 - 10	100	28	8 - 56	426E (ER16)		21078 <sup>1)</sup>
	SK 50	1 - 16	100	42	24 - 104	430E (ER25)		21678
	SK 50	2 - 20	100	50	24 - 136	470E (ER32)		22078
	SK 50	3 - 26	100	63	176	472E (ER40)		22678
extra-long	SK 40	1 - 10	160	28	8 - 56	426E (ER16)		41079 <sup>1)</sup>
	SK 40	2 - 16	160	42	24 - 104	430E (ER25)		41679
	SK 40	2 - 20	160	50	24 - 136	470E (ER32)		42079
	SK 40	3 - 26	160	63	176	472E (ER40)		42679
	SK 50	1 - 16	160	42	24 - 104	430E (ER25)		41678
	SK 50	2 - 20	160	50	24 - 136	470E (ER32)		42078





1) with 6 position lock nut

## Spare parts ER collet chucks

	 Lock nut	 Lock nut IK	 Lock nut	 Y clamping key	 ER Mini clamping key	 Mini lock nut	 Mini IK	 Stop screw IK
	62 950 ...	83 950 ...	62 950 ...	83 357 ...	83 950 ...	62 950 ...	83 950 ...	84 950 ...
<b>Spare parts for collet</b>								
426E (ER16 mini)					101	066	058	44600
426E (ER16)	044							44600
430E (ER25)		055	055	125				44400
470E (ER32)		056	65600	132				44400
472E (ER40)		057	65700	140				44500

 Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

### Accessories


			
ER collet	Sealing ring	Pull studs	Others
→ 271–276, 279	→ 280	→ 58, 60	→ 284

# Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Toolholder including clamping key SW4

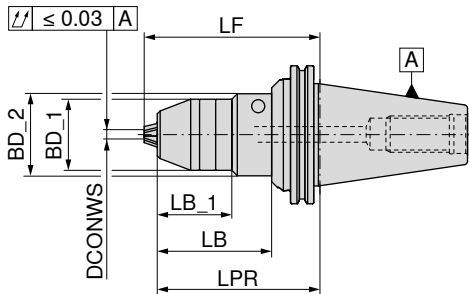

A G 6,3 n<sub>max</sub> 10000 AD G 6,3 n<sub>max</sub> 10000

Adapter	DCONWS mm	LPR mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LF mm	84 418 ...	84 419 ...
SK 30	0,5 - 10	80	43,0			59,9	89,0	313	
SK 40	0,5 - 13	80	48,5			60,8	89,0	413	413
SK 40	2,5 - 16	80	51,0			60,0	90,5	416	416
SK 40	2,5 - 16	80	51,0			60,8	90,5		
SK 50	0,5 - 13	110	48,5	56	50,9	78,0	119,0		513
SK 50	0,5 - 13	110	48,5	56	50,9	78,1	119,0	513	
SK 50	2,5 - 16	110	51,0	56	50,9	78,0	120,5		516
SK 50	2,5 - 16	110	56,0		50,9	78,0	120,5	516	

Can be used at G 2.5 to 30,000 1/min after additional balancing !

**Accessories**




Others  
→ 284

# Synchro tapping chuck with minimum length compensation

- ▲ For collet
- ▲ With length compensation under tension and compression (LZD)
- ▲ for synchro use
- ▲  $p_{max.} = 50$  bar
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Without insert

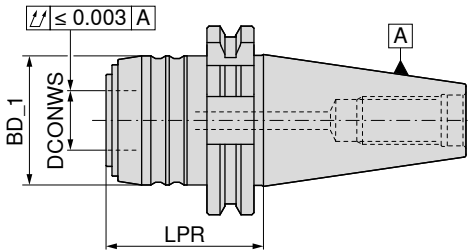

AD

**83 416 ...**

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	
<b>SK 40</b>	M3 - M12	1	53	43	20	1,0 / 0,2	<b>012</b>
<b>SK 40</b>	M6 - M20	2	90	60	32	1,0 / 0,2	<b>020</b>
<b>SK 50</b>	M3 - M12	1	53	43	20	1,0 / 0,2	<b>112</b>
<b>SK 50</b>	M6 - M20	2	74	60	32	1,0 / 0,2	<b>120</b>

*Accessories*


	
Pull studs	Others
→ 58, 60	→ 284

# Insert for synchro quick change tapping chuck with minimum length compensation

▲ SZID = for insert size

### Scope of supply:




Includes lock nut

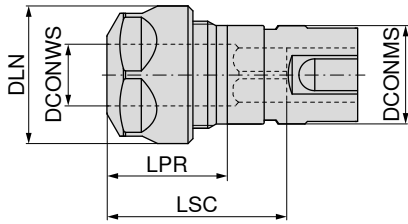

83 608 ...

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	012 <sup>1)</sup>
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	020

1) with 6 position lock nut



62 950 ...

83 950 ...

62 950 ...


83 357 ...

### Spare parts for Article no.

83 608 012	M22x1,5 - SW25	044	M22x1,5	054	M22x1,5	054	116
83 608 020			M32x1,5	055	M32x1,5	055	125

## Quick change tap chuck with length compensation

- ▲ With length compensation under tension and compression (LZD)
- ▲ also available with Balluff chip **on request**

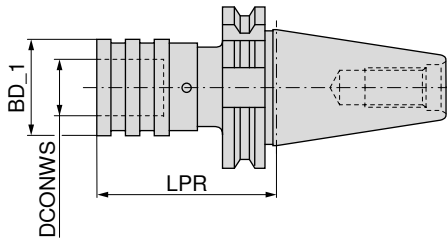

A

83 428 ...

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	
SK 30	M3 - M12	01	60	38	19	9	312
SK 30	M6 - M20	02	101	55	31	15	320
SK 40	M3 - M12	01	60	38	19	9	412
SK 40	M6 - M20	02	100	55	31	15	420
SK 50	M3 - M12	01	62	38	19	9	512
SK 50	M6 - M20	02	83	55	31	15	520

### Accessories

		
Collet	Pull studs	Others
→ 288, 290-292	→ 58, 60	→ 284




## Adapter with ABS Connection

▲ also available with Balluff chip on request

### Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

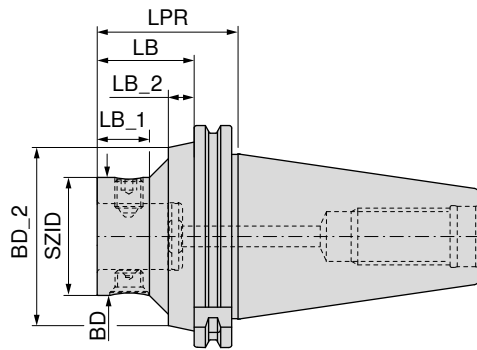

AD/B  
G 6,3 n<sub>max</sub> 8000

84 201 ...

Adapter	KOMET no.	SZID	BD	LPR	LB	LB_1	LB_2	BD_2	
			mm	mm	mm	mm	mm	mm	
SK 40	A50 55120	ABS 25	25	50	30,9	20,0	7,9	50	04090
SK 40	A50 55130	ABS 32	32	50	30,9	20,0	7,9	50	04089
SK 40	A50 55140	ABS 40	40	50	30,9	20,0		50	04088
SK 40	A50 55150	ABS 50	50	50	30,9				04097
SK 40	A50 55160	ABS 63	63	90	70,9		15,9	50	04096
SK 50	A50 55320	ABS 25	25	60	40,9	20,0	12,9	80	05090
SK 50	A50 55330	ABS 32	32	60	40,9	20,0	12,9	80	05089
SK 50	A50 55340	ABS 40	40	60	40,9	20,0	12,9	80	05088
SK 50	A50 55350	ABS 50	50	60	40,9	22,0	10,9	80	05097
SK 50	A50 55360	ABS 63	63	60	40,9	30,4	7,3	80	05096
SK 50	A50 55370	ABS 80	80	70	50,9				05092
SK 50	A50 55380	ABS 100	100	115	95,9		15,9	80	05091

## Conversion kit – SK



84 950 ...


for	Adapter	
4 mm	SK 40	23200
6 mm	SK 50	23400

## Eccentric adjuster with ABS Connection

- ▲ Adjustment  $\pm 0.25$  mm on diameter
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

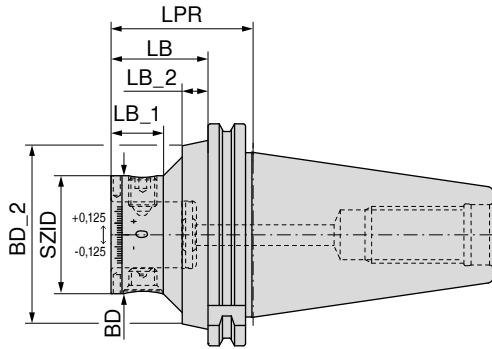

AD/B

84 204 ...



Adapter	KOMET no.	SZID	BD	LPR	LB	LB_1	LB_2	BD_2	
			mm	mm	mm	mm	mm	mm	
SK 40	A50 56150	ABS 50	50	50	30,9				04097
SK 40	A50 56160	ABS 63	63	90	70,9		15,9	50	04096
SK 50	A50 56350	ABS 50	50	60	40,9	22,0	10,9	80	05097
SK 50	A50 56360	ABS 63	63	60	40,9	30,4	7,3	80	05096

## Torsional vibration dampers with ABS Connection

- ▲ also available with Balluff chip **on request**

### Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

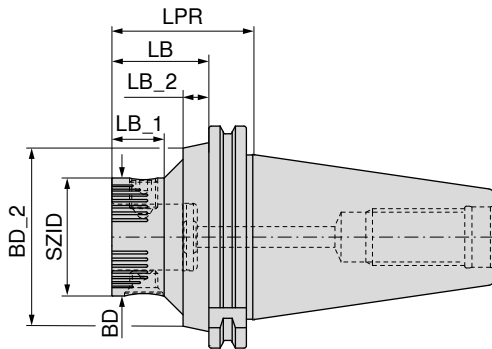

AD/B


84 207 ...

Adapter	KOMET no.	SZID	BD	LPR	BD_2	LB	LB_1	LB_2	
			mm	mm	mm	mm	mm	mm	
SK 40	A50 01351	ABS 50	50	50		30,9			04097
SK 40	A50 01361	ABS 63	63	90	50	70,9		15,9	04096
SK 50	A50 01451	ABS 50	50	60	80	40,9	22,0	10,9	05097
SK 50	A50 01461	ABS 63	63	60	80	40,9	30,4	7,3	05096
SK 50	A50 01470	ABS 80	80	70		50,9			05092

# Adapter with ABS Connection – SK-FC

▲ with face contact


▲ also available with Balluff chip on request

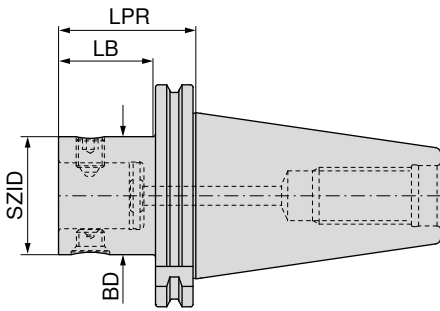

AD  
G 6,3 n<sub>max</sub> 8000


<b>84 264 ...</b>
<b>05073</b>
<b>06373</b>
<b>08073</b>
<b>10073</b>

Adapter	SZID	BD mm	LPR mm	LB mm
SK-FC 50	ABS 50	50	60	40,9
SK-FC 50	ABS 63	63	60	40,9
SK-FC 50	ABS 80	80	70	50,9
SK-FC 50	ABS 100	100	115	95,9



Clamping screw

**84 950 ...**



Taper screw

**84 950 ...**

### Spare parts

#### SZID


ABS 50	<b>20300</b>	<b>20400</b>
ABS 63	<b>25500</b>	<b>27300</b>
ABS 80	<b>25600</b>	<b>25100</b>
ABS 100	<b>25700</b>	<b>25200</b>

### Accessories

		
Pull studs	Extension	Others
→ 58, 60	→ 187	→ 284

# Adapter for milling cutters with threaded end

▲ also available with Balluff chip on request

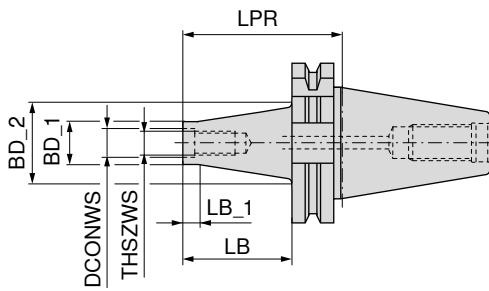

AD

G 6,3  $n_{max}$  18000

**56 705 ...**



AD

G 16  $n_{max}$  8000

**56 707 ...**



Adapter	THSZWS	DCONWS	LB	BD_1	BD_2	LB_1	LPR	
		mm	mm	mm	mm	mm	mm	
SK 40	M8	8,5	25	13,8	15	12	44	081
SK 40	M8	8,5	50	13,8	23	12	69	082
SK 40	M8	8,5	75	13,8	25	12	94	083
SK 40	M10	10,5	25	18,0	23	12	44	101
SK 40	M10	10,5	50	18,0	25	12	69	102
SK 40	M10	10,5	75	18,0	30	12	94	103
SK 40	M10	10,5	100	18,0	35	12	119	104
SK 40	M12	12,5	25	21,0	24	12	44	121
SK 40	M12	12,5	50	21,0	30	12	69	122
SK 40	M12	12,5	75	21,0	35	12	94	123
SK 40	M12	12,5	100	21,0	38	12	119	124
SK 40	M16	17,0	25	29,0	29	12	44	161
SK 40	M16	17,0	50	29,0	34	12	69	162
SK 40	M16	17,0	75	29,0	35	12	94	163
SK 40	M16	17,0	100	29,0	40	12	119	164
SK 40	M16	17,0	125	29,0	44	12	144	165
SK 40	M16	17,0	150	29,0	48	12	169	166
SK 40	M16	17,0	200	29,0	50	12	219	167
SK 50	M12	12,5	50	21,0	30	12	69	122
SK 50	M12	12,5	100	21,0	38	12	119	124
SK 50	M12	12,5	150	21,0	52	12	169	126
SK 50	M16	17,0	50	29,0	34	12	69	162
SK 50	M16	17,0	100	29,0	40	12	119	164
SK 50	M16	17,0	150	29,0	48	12	169	166
SK 50	M16	17,0	200	29,0	58	12	219	167
SK 50	M16	17,0	250	29,0	62	12	269	168

## Accessories

Extension-Reduction set → 257	Pull studs → 58, 60	Others → 284

# Adapter for milling cutters with threaded end

▲ also available with Balluff chip on request

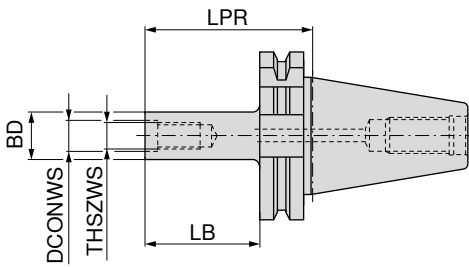

AD  
G 6,3 n<sub>max</sub> 18000

**56 709 ...**

Adapter	THSZWS	DCONWS mm	LB mm	BD mm	LPR mm	
SK 40	M8	8,5	50	13,8	69	<b>082</b>
SK 40	M10	10,5	50	18,0	69	<b>102</b>
SK 40	M10	10,5	75	18,0	94	<b>103</b>
SK 40	M10	10,5	100	18,0	119	<b>104</b>
SK 40	M12	12,5	50	21,0	69	<b>122</b>
SK 40	M12	12,5	75	21,0	94	<b>123</b>
SK 40	M12	12,5	100	21,0	119	<b>124</b>
SK 40	M16	17,0	50	29,0	69	<b>162</b>
SK 40	M16	17,0	75	29,0	94	<b>163</b>
SK 40	M16	17,0	100	29,0	119	<b>164</b>

## Accessories


Extension-Reduction set → 257	Pull studs → 58, 60	Others → 284

# Combination shell mill adapter

- ▲ For milling cutters with transverse or longitudinal groove according to DIN 6358
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Toolholder with clamping screw, driving ring and dowel spring

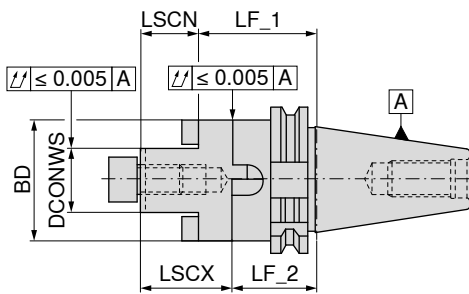






A  
G 2,5 n<sub>max</sub> 25000

**82 744 ...**

	Adapter	DCONWS	LF_1	BD	LSCX	LSCN	LF_2	
		mm	mm	mm	mm	mm	mm	
short	SK 30	16	50	32	27	17	40	11680
	SK 30	22	50	40	31	19	38	12280
	SK 30	27	55	48	33	21	43	12780
	SK 30	32	60	58	38	24	46	13280
	SK 40	16	55	32	27	17	45	11679
	SK 40	22	55	40	31	19	43	12279
	SK 40	27	55	48	33	21	43	12779
	SK 40	32	60	58	38	24	46	13279
	SK 40	40	60	70	41	27	46	14079 <sup>1)</sup>
	SK 50	16	55	32	27	17	45	11678
	SK 50	22	55	40	31	19	43	12278
	SK 50	27	55	48	33	21	43	12778
SK 50	32	55	58	38	24	41	13278	
SK 50	40	55	70	41	27	41	14078 <sup>1)</sup>	
SK 50	50	70	90	46	30	54	15078 <sup>1)</sup>	
medium length	SK 40	16	100	32	27	17	90	21679
	SK 40	22	100	40	31	19	88	22279
	SK 40	27	100	48	33	21	88	22779
	SK 40	32	100	58	38	24	86	23279
	SK 40	40	100	70	41	27	86	24079

1) With cross screw

				
Parallel key	Drive ring	Cross nut key	Cross screw	clamping screw
<b>83 950 ...</b>	<b>83 370 ...</b>	<b>83 368 ...</b>	<b>83 367 ...</b>	<b>83 950 ...</b>

### Spare parts

DCONWS								
16	4 x 4 x 20	284	116	116	M8	016	M8x25	113
22	6 x 6 x 25	285	122	122	M10	022	M10x25	124
27	7 x 7 x 25	286	127	127	M12	027	M12x30	125
32	8 x 7 x 28	287	132	132	M16	032	M16x35	126
40	10 x 8 x 32	288	140	140	M20	040	M20x40 - SW17	112
50	12 x 8 x 36	289	150	150	M24	050		

### Accessories


		
Pull studs	Milling Adapter Rings	Others
58, 60	263	284

# Shell mill adapter with reduced flange diameter

- ▲ Screwed drive dogs
- ▲ also available with Balluff chip on request

**Scope of supply:**

Base body with retaining screw and drive dog

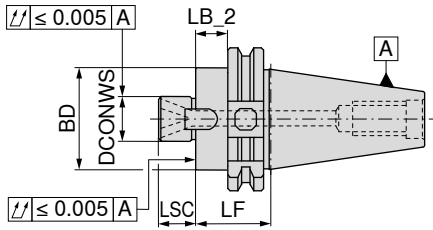

**NEW**




AD  
G 2,5 n<sub>max</sub> 25000

**82 315 ...**

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	
<b>short</b>	SK 40	22	41	60	38	19	<b>12279</b>
	SK 40	27	25	44	48	21	<b>12779</b>
	SK 50	22	41	60	38	19	<b>12278</b>
	SK 50	27	25	44	48	21	<b>12778</b>

**i** These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters. Now they can be clamped perfectly, thanks to the adapted flange diameters.



Screw for drivers



Driver



clamping screw

**83 950 ...**

**83 950 ...**

**83 950 ...**

**Spare parts**

DCONWS						
22	M4x8	<b>51700</b>	10x7x20,5	<b>51500</b>	M10x25	<b>124</b>
27	M5x8	<b>51800</b>	12x9x24,3	<b>51600</b>	M12x30	<b>125</b>





# Shell mill adapter

- ▲ Screwed drive dogs
- ▲ also available with Balluff chip on request

### Scope of supply:

Toolholder with clamping screw

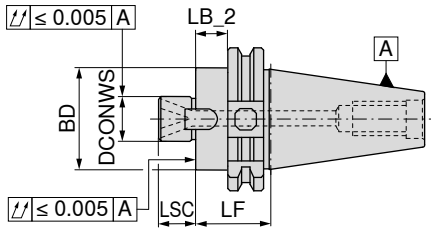

**NEW**



AD

G 2,5 n<sub>max</sub> 25000

**82 745 ...**

**NEW**



AD/B


G 2,5 n<sub>max</sub> 25000

**82 745 ...**


	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm		
short	SK 30	16	20,9	40	38	17		11680
	SK 30	22	30,9	50	48	19		12280
	SK 30	27	35,9	55	58	21		12780
	SK 30	32	30,9	50	78	24		13280
	SK 40	16	25,0	44	38	17		
	SK 40	22	25,0	44	48	19		11679
	SK 40	27	36,0	55	58	21		12779
	SK 40	32	31,0	50	78	24		13279
	SK 40	40	31,0	50	88	27		14079 <sup>1)</sup>
	SK 50	16	25,0	44	38	17		
SK 50	22	25,0	44	48	19		11678	
SK 50	27	25,0	44	58	21		12778	
SK 50	32	21,0	40	78	24		13278	
SK 50	40	31,0	50	88	27		14078 <sup>1)</sup>	
medium length	SK 40	16	81,0	100	38	17		21679
	SK 40	22	81,0	100	48	19		22279
	SK 40	27	81,0	100	58	21		22779
	SK 40	32	81,0	100	78	24		23279
	SK 40	40	81,0	100	88	27		24079 <sup>1)</sup>
	SK 50	16	81,0	100	38	17		21678
	SK 50	22	81,0	100	48	19		22278
	SK 50	27	81,0	100	58	21		22778
	SK 50	32	81,0	100	78	24		23278
	SK 50	40	81,0	100	88	27		24078 <sup>1)</sup>
long	SK 40	16	111,0	130	38	17		31679
	SK 40	22	111,0	130	48	19		32279
	SK 40	27	111,0	130	58	21		32779
	SK 40	32	111,0	130	78	24		33279
	SK 40	40	111,0	130	88	27		34079 <sup>1)</sup>
	SK 50	16	111,0	130	38	17		31678
	SK 50	22	111,0	130	48	19		32278
	SK 50	27	111,0	130	58	21		32778
	SK 50	32	111,0	130	78	24		33278
	SK 50	40	111,0	130	88	27		34078 <sup>1)</sup>
extra-long	SK 40	16	141,0	160	38	17		41679
	SK 40	22	141,0	160	48	19		42279
	SK 40	27	141,0	160	58	21		42779
	SK 40	32	141,0	160	78	24		43279
	SK 40	40	141,0	160	88	27		44079 <sup>1)</sup>
	SK 50	16	141,0	160	38	17		41678
	SK 50	22	141,0	160	48	19		42278
	SK 50	27	141,0	160	58	21		42778
	SK 50	32	141,0	160	78	24		43278
	SK 50	40	141,0	160	88	27		44078 <sup>1)</sup>

1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!

## Spare parts facemill adapters

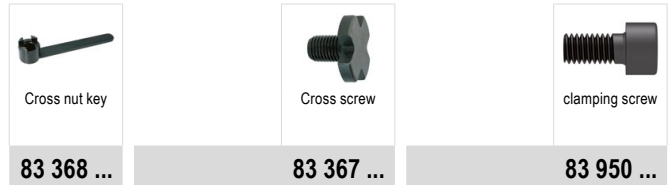

	83 368 ...		83 367 ...		83 950 ...
<b>Spare parts</b>					
<b>DCONWS</b>					
16	<b>116</b>	M8	<b>016</b>	M8x25	<b>113</b>
22	<b>122</b>	M10	<b>022</b>	M10x25	<b>124</b>
27	<b>127</b>	M12	<b>027</b>	M12x30	<b>125</b>
32	<b>132</b>	M16	<b>032</b>	M16x35	<b>126</b>
40	<b>140</b>	M20	<b>040</b>	M20x40 - SW17	<b>112</b>

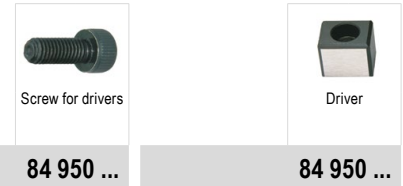

			84 950 ...		84 950 ...
<b>Spare parts</b>					
<b>DCONWS</b>					
16		M3x12	<b>162</b>	8x9,8x10	<b>43400</b>
22		M4x10	<b>163</b>	10x11,2x12	<b>43200</b>
27		M4x16	<b>164</b>	12x12,6x14	<b>43300</b>
32		M5x16	<b>166</b>	14x14x22,5	<b>160</b>
40		M5x16	<b>166</b>	16x16x23	<b>161</b>

### Accessories


		
Pull studs	Extensions	Others
→ 58, 60	→ 262	→ 284

# Large diameter facemill adapter

- ▲ For milling cutters with keyway or drive slot DIN 6357
- ▲ also available with Balluff chip **on request**

**Scope of supply:**


Holder with integrated drive dogs according to DIN 2079 and 4 fixation screws

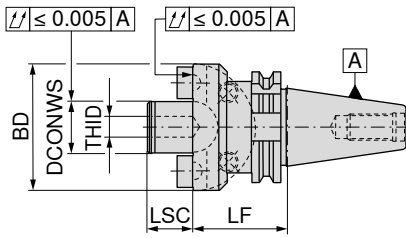

A  
G 6,3 n<sub>max</sub> 8000

**82 432 ...**

Adapter	DCONWS mm	LF mm	BD mm	LSC mm	THID	
SK 40	40	60	89	30	M20	<b>14079</b>
SK 50	40	70	89	30	M20	<b>14078</b>
SK 50	60	70	129	40	M30	<b>16078</b>



Screw for drivers



Driver



clamping screw

**84 950 ...**      **84 950 ...**      **83 950 ...**

**Spare parts**  
**DCONWS**


40	M5x16	<b>166</b>	16x16x23	<b>161</b>	M12x50	<b>140</b>
60	M12x25	<b>43500</b>	25,4x25x26,5	<b>43100</b>	M16x45	<b>160</b>

**Accessories**

Pull studs	Others
→ <b>58, 60</b>	→ <b>284</b>

# Taper sleeve DIN6383 for DIN 228-2D Morse taper shanks

▲ also available with Balluff chip on request

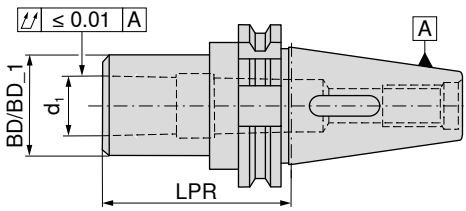

**NEW**



AD

G 6,3 n<sub>max</sub> 15000

**82 746 ...**

	Adapter	d <sub>1</sub>	LPR mm	BD mm		
short	SK 30	MK1	50	25	11080	
	SK 30	MK2	63	32	12080	
	SK 30	MK3	80	40	13080	
	SK 40	MK2	50	32	12079	
	SK 40	MK1	50	25	11079	
	SK 40	MK3	70	40	13079	
	SK 40	MK4	95	48	14079	
	SK 50	MK1	50	25	11078	
	SK 50	MK2	60	32	12078	
	SK 50	MK3	65	40	13078	
	SK 50	MK4	95	48	14078	
	SK 50	MK5	105	63	15078	
	medium length	SK 40	MK2	117	32	22079
		SK 40	MK3	133	40	23079
		SK 40	MK4	156	48	24079

## Accessories



Morse taper adapter sleeve → 242	Pull studs → 58, 60	Others → 284

## Milling adapter sleeve

- ▲ For mounting steep taper adapters according to DIN 2080
- ▲ With an extended retaining screw, adapters compliant with ISO 7388-1 – SK, ISO 7388-2 – MAS-BT and ANSI-CAT can also be clamped
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder with clamping screw for DIN 2080 adapters

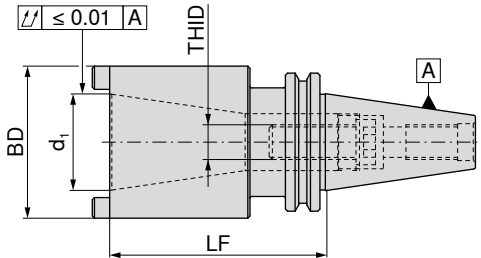

A  
G 6,3 n<sub>max</sub> 8000

**84 040 ...**

Adapter	d <sub>1</sub>	LF mm	BD mm	THID	
SK 40	SK 30	50	50	M12	13079
SK 40	SK 40	100	70	M16	14079
SK 50	SK 40	80	70	M16	14078
SK 50	SK 50	120	100	M24	15078

### Spare parts for Article no.

Article no.	Clamping screw SK	Clamping Screw	Counterscrew	Hollow key with nose	Threaded ring	clamping screw
84 040 13079						
84 040 14079	264	43700	030	017	127	125
84 040 14078	009	43600	030	023	43800	
84 040 15078	256		030	133	43900	

## Auxiliary table for finding the required spare parts and accessories for intermediate sleeves for SK-adapters



ISO 7388-1	Norm of the SK-shank		Clamping screw length	Clamping screw SK Article no.	Threaded ring Article no.	lock screw Article no.	hollow key Article no.
	Ø d <sub>1</sub> ISO 7388-1	Ø d <sub>1</sub> DIN 2080					
84 040 13079		SK 30	M12 x 30	83 950 125	84 950 127	83 950 030	83 359 017
84 040 14079	SK40		M16 x 70	83 950 264	84 950 43800	83 950 030	83 359 023
84 040 14079		SK40	M16 x 45	84 950 43700	84 950 43800	83 950 030	83 359 023
84 040 14078	SK40		M16 x 65	84 950 43600			
84 040 14078		SK40	M16 x 40	83 950 009			
84 040 15078	SK50		M24 x 80	83 950 256	84 950 43900	83 950 030	83 359 133
84 040 15078		SK50	M24 x 50	83 950 263	84 950 43900	83 950 030	83 359 133

## SK/HSK-A adapter

- ▲ for mounting HSK-A adapters according to ISO 12164
- ▲ also available with Balluff chip **on request**

### Scope of supply:

with clamping cartridge and cover ring

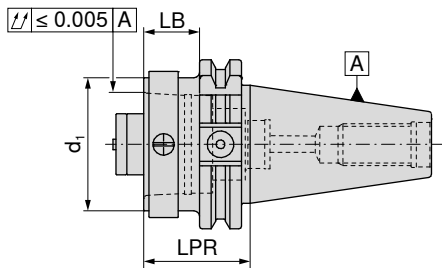

AD


84 014 ...

Adapter	d <sub>1</sub>	LB mm	LPR mm	
SK 40	HSK-A 32	20,9	40	04060
SK 40	HSK-A 40	20,9	40	04059
SK 40	HSK-A 50	20,9	40	04058
SK 40	HSK-A 63	60,9	80	04057
SK 50	HSK-A 32	20,9	40	05060
SK 50	HSK-A 40	20,9	40	05059
SK 50	HSK-A 50	20,9	40	05058
SK 50	HSK-A 63	20,9	40	05057
SK 50	HSK-A 100	80,9	100	05055

# SK/PSC adapter

- ▲ for mounting PSC adapters according to ISO 26623-1
- ▲ also available with Balluff chip **on request**

**Scope of supply:**  
with tightening screw

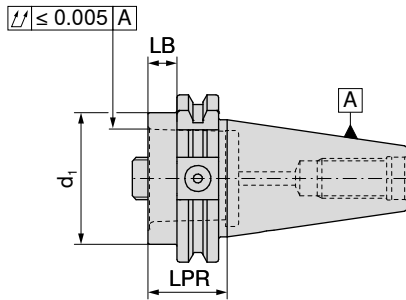

AD

**84 015 ...**

Adapter	d <sub>1</sub>	LB mm	LPR mm	
SK 40	PSC 32	10,9	30	04087
SK 40	PSC 40	10,9	30	04095
SK 40	PSC 50	10,9	30	04094
SK 40	PSC 63	65,9	85	04093
SK 50	PSC 32	10,9	30	05087
SK 50	PSC 40	10,9	30	05095
SK 50	PSC 50	10,9	30	05094
SK 50	PSC 63	10,9	30	05093
SK 50	PSC 80	50,9	70	05086



**84 950 ...**




**84 950 ...**

**Spare parts**  
d<sub>1</sub>

PSC 32	<b>127</b>	SW8	<b>122</b>
PSC 40	<b>128</b>	SW8	<b>123</b>
PSC 50	<b>129</b>	SW10	<b>124</b>
PSC 63	<b>130</b>	SW14	<b>126</b>
PSC 80	<b>130</b>	SW14	<b>126</b>

## Blank

- ▲ Material: Steel 16MnCr5
- ▲ for production of special tools
- ▲ Diameter BD turned with 0.5 mm oversize
- ▲ Taper hardened and ground
- ▲ Special tool area in soft state
- ▲ also available with Balluff chip **on request**

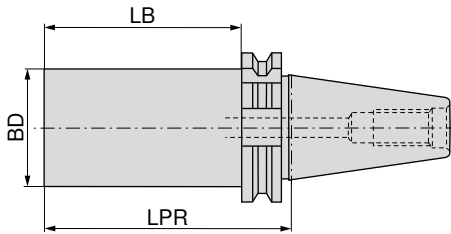

NEW



AD/B

82 747 ...

Adapter	BD mm	LPR mm	LB mm
SK 40	63,0	250	231
SK 50	63,5	300	281

16379


16378

## Test bar

- ▲ Without tool change groove
- ▲ Use for MAS BT 40 special pull studs with 3 mm shorter LF dimension, as standard

### Scope of supply:

in wooden box

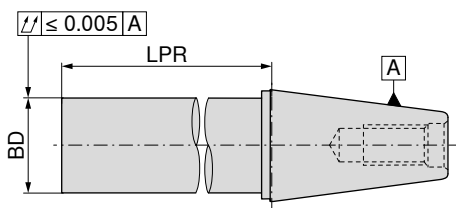

NEW



A

81 746 ...

Adapter	BD mm	LPR mm
SK / BT 40	40	320
SK / BT 50	50	320

14079

15078

### Accessories

Pull studs	Others
→ 58, 60	→ 284






## Pull studs for tool holders according to ISO 7388-1

▲ ISO 7388-3 AD

▲ For tools with or without axial coolant supply

### Scope of supply:

including O-Ring



Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	82 475 ...		82 468 ...	
														030	040	030	050
SK 30	13	9	17	13	M12	44	24	19	5	3,5	14	20	A				
SK 40	19	14	23	17	M16	54	26	20	7	7,0	19	50	A				
SK 50	28	21	36	25	M24	74	34	25	10	11,5	30	150	A				
SK 30	13	9	17	13	M12	44	24	19	5		14	20	B	030			
SK 40	19	14	23	17	M16	54	26	20	7		19	50	B	040			
SK 50	28	21	36	25	M24	74	34	25	10		30	150	B	050			



## Pull studs for tool holders according to ISO 7388-1

▲ Similar to BT 45°, but 3 mm shorter

▲ for Haas, Micron and Hurco machines

### Scope of supply:

including O-Ring



Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND mm	DRVS mm	TQX Nm	form	83 538 ...		83 535 ...	
														040		040	
SK 40	15	10	23	17	M16	57	32	25	5	4	19	50	A				
SK 40	15	10	23	17	M16	57	32	25	5		19	50	B	040			





### Spare parts

BD\_4

BD_4	BT / SK 40	040
17		
25	BT / SK 50	050

## Pull studs for tool holders according to ISO 7388-1

- ▲ ISO 7388-3 Form UD
- ▲ For tools with axial coolant supply



NEW



82 469 ...

Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	CND mm	DRVS mm	TQX Nm
SK 40	18,95	12,95	22,5	17	M16	44,5	16,4	11,15	7,35	19	50

04000

## Pull studs for adapters according to ANSI-CAT (MAZAK)

- ▲ ANSI – CAT 40
- ▲ Similar to BT 45°, but 3 mm shorter
- ▲ For Mazak machines



NEW

82 469 ...

Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	CND mm	DRVS mm	TQX Nm
SK 40	18,796	12,449	22	17	M16	44,106	19,106	14,026	7	19	50



14000

## Pull studs for tool holders according to ISO 7388-1

- ▲ CAT Mazak
- ▲ Face ground flat

### Scope of supply:

- SK 50 including O-ring
- SK 40 without O-ring groove





82 487 ...

Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND	DRVS mm	TQX Nm
SK 40	18,79	12,44	21,8	17	M16	41,26	16,25	11,17	4,0	7,0	19	50
SK 50	29,10	19,60	37,0	25	M24	65,50	25,55	17,95	5,5	11,5	30	150

040  
050

## Pull studs for tool holders according to ISO 7388-1

- ▲ SK 40 with circlip groove and edge protection, with and without internal thread
- ▲ SK 50 with circlip groove, with and without internal thread
- ▲ For tools according to ISO 7388-1 for conversion to DIN 2080



without internal thread  
**82 493 ...**

with internal thread  
**82 494 ...**

Adapter	BD_1 mm	BD_2 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND	DRVS mm	TQX Nm
SK 40	25,0	21,1	17	M16	53	25	13,6	8	7	19	50
SK 50	39,3	32,0	25	M24	65	25	13,3	10		30	150


040  
050<sup>1)</sup>

040  
050

1) with O ring

## Pull studs for tool holders according to ISO 7388-1

- ▲ DECKEL thread S 20 x 2



83 471 ...

Adapter	THSZMS	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	BD_2 mm	BD_4 mm	DRVS mm
SK 40	S 20 x 2	M16	55	33	4	17	16,7	17	22


040

# ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

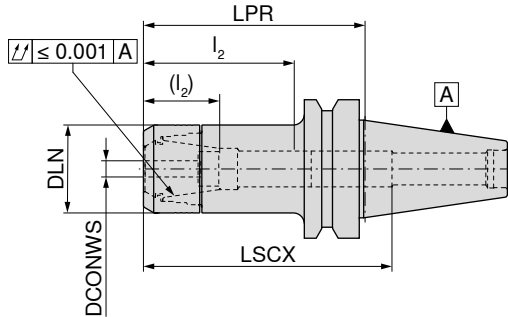

AD  
G 2,5  $n_{max}$  25000

**84 524 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	
BT 30	1 - 10	50	30	73	28 - 44 (16 - 31)	426E (ER16)	001
BT 30	1 - 10	75	30	97	28 - 45 (14 - 31)	426E (ER16)	002
BT 30	1 - 10	100	30	123	28 - 44 (16 - 31)	426E (ER16)	003
BT 30	1 - 10	120	30	112	28 - 45 (14 - 31)	426E (ER16)	004
BT 30	2 - 16	60	40	77	35 - 59 (30 - 42)	430E (ER25)	160
BT 30	2 - 16	75	40	72	38 - 56 (23 - 39)	430E (ER25)	161
BT 30	2 - 16	90	40	87	38 - 56 (23 - 39)	430E (ER25)	162
BT 30	2 - 16	120	40	115	38 - 56 (23 - 39)	430E (ER25)	164
BT 30	2 - 20	60	50	69	42 - 52	470E (ER32)	207
BT 30	2 - 20	75	50	84	42 - 62 (24 - 45)	470E (ER32)	208
BT 30	2 - 20	90	50	94	42 - 62 (24 - 45)	470E (ER32)	209
BT 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	210
BT 40	1 - 10	90	30	120	30 - 50 (29 - 36)	426E (ER16)	310
BT 40	1 - 10	120	30	140	29 - 45 (29 - 35)	426E (ER16)	410
BT 40	1 - 10	150	30	180	29 - 45 (29 - 32)	426E (ER16)	510
BT 40	1 - 10	200	30	220	29 - 50 (29 - 36)	426E (ER16)	610
BT 40	2 - 16	60	40	92	44 - 64 (36 - 46)	430E (ER25)	116
BT 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	216
BT 40	2 - 16	90	40	91	42 - 59 (36 - 41)	430E (ER25)	316
BT 40	2 - 16	105	40	100	35 - 60 (20 - 42)	430E (ER25)	168
BT 40	2 - 16	120	40	91	40 - 65 (36 - 47)	430E (ER25)	416
BT 40	2 - 16	150	40	100	40 - 64 (36 - 45)	430E (ER25)	516
BT 40	2 - 16	200	40	150	40 - 64 (36 - 45)	430E (ER25)	616
BT 40	2 - 20	60	50	55	45 - 64 (42 - 46)	470E (ER32)	120
BT 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	220
BT 40	2 - 20	90	50	100	42 - 76 (42 - 52)	470E (ER32)	320
BT 40	2 - 20	120	50	110	42 - 71 (42 - 53)	470E (ER32)	420
BT 40	2 - 20	150	50	110	42 - 71 (42 - 53)	470E (ER32)	520
BT 40	3 - 26	75	63	78	54 - 59	472E (ER40)	226
BT 40	3 - 26	105	63	93	55 - 71 (48 - 53)	472E (ER40)	326
BT 50	2 - 20	75	50	110	45 - 70 (42 - 53)	470E (ER32)	720
BT 50	2 - 20	105	50	140	45 - 63 (42 - 45)	470E (ER32)	820
BT 50	2 - 20	165	50	200	45 - 74 (42 - 56)	470E (ER32)	920
BT 50	3 - 26	75	63	100	48 - 58	472E (ER40)	726
BT 50	3 - 26	105	63	100	48 - 58	472E (ER40)	826

→ Transmittable torque moments, Page 313

**i** LSCX = clamping depth without back stop screw for shanks  
 $l_2$  = with back stop screw 1, dimension in brackets ( $l_2$ ) = with back stop screw 2  
 dimension LPR when using tightening nuts with seals 3 mm longer

## Spare parts, ER precision collet chuck – Centro-P


	84 950 ...	84 950 ...		83 950 ...		83 950 ...
<b>Spare parts for collet</b>						
426E (ER16)	011	001	M11x1 - SW6	341	M11x1 - SW6	337
430E (ER25)	013	003	M18x1,5 - SW6	432	M18x1,5 - SW6	431
470E (ER32)	015	005	M22x1,5 - SW6	402	M22x1,5 - SW6	401
472E (ER40)	017	007			M28x1,5 - SW6	400

## ER Precision tapered collet chuck – Centro-P

- ▲ for special tapered nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

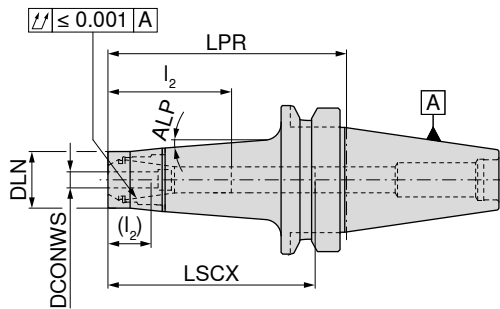

AD/B  
G 2,5  $n_{max}$  25000

84 517 ...

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	ALP	
BT 40	1 - 10	100	24	72	28 - 48 (20 - 35)	426E (ER16)	4,5°	410
BT 40	1 - 10	135	24	165	28 - 48 (20 - 35)	426E (ER16)	4,5°	31000
BT 40	1 - 10	160	24	180	28 - 48 (20 - 35)	426E (ER16)	4,5°	510

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

	84 950 ...	84 950 ...		83 950 ...		83 950 ...
<b>Spare parts for collet</b>						
426E (ER16)	033	031	M11x1 - SW6	341	M11x1 - SW6	337

### Accessories


ER collet	Sealing ring	Roll key	Roll key device	Pull studs	Others
→ 268-276, 279	→ 280	→ 286	→ 286	→ 110-111	→ 284

# ER Precision collet chuck, slim version – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max}$  80 bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

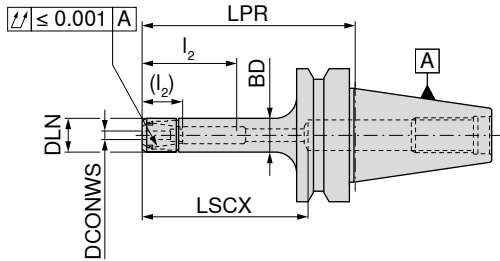

AD  
G 2,5  $n_{max}$  25000

**84 507 ...**



AD/B  
G 2,5  $n_{max}$  25000

**84 508 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	BD mm	LSCX mm	$I_2$ ( $I_2$ ) mm	for collet		
BT 30	1 - 7	50	16	16	68	18 - 32 (12 - 22)	4008E (ER11)		
BT 30	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	007	
BT 40	1 - 7	75	16	16	100	15 - 30 (8 - 21)	4008E (ER11)		307
BT 40	1 - 7	90	16	16	68	18 - 36 (12 - 26)	4008E (ER11)		40600
BT 40	1 - 7	120	16	16	140	15 - 30 (8 - 21)	4008E (ER11)		507
BT 40	1 - 7	150	16	16	68	18 - 36 (12 - 26)	4008E (ER11)		90600
BT 40	1 - 10	75	22	22	100	27 - 49 (16 - 32)	426E (ER16)		216
BT 40	1 - 10	90	22	22	115	27 - 49 (16 - 32)	426E (ER16)		316
BT 40	1 - 10	120	22	22	145	27 - 49 (16 - 32)	426E (ER16)		416
BT 40	1 - 10	150	22	22	175	27 - 49 (16 - 32)	426E (ER16)		516

→ Transmittable torque moments, Page 313

**i** LSCX = Clamping depth without back stop screw for shanks  
 $I_2$  = With back stop screw 1, Dimension in brackets ( $I_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

	Mini lock nut IK	Mini lock nut	Stop screw 2	Stop screw 1
	<b>84 950 ...</b>	<b>84 950 ...</b>	<b>83 950 ...</b>	<b>83 950 ...</b>
<b>Spare parts for collet</b>				
4008E (ER11)		<b>041</b>	M8x1 - SW4	<b>340</b>
426E (ER16)	<b>035</b>	<b>034</b>	M11x1 - SW6	<b>341</b>
			M8x1 - SW4	<b>336</b>
			M11x1 - SW6	<b>337</b>

### Accessories


ER collet	Sealing ring	Device	Roll key	Roll key device	Pull studs	Others
→ 268-276, 279	→ 280	→ 285	→ 286	→ 286	→ 110-111	→ 284

# ER precision collet chuck – HDC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body **including** lock nut, **without** backstop screw

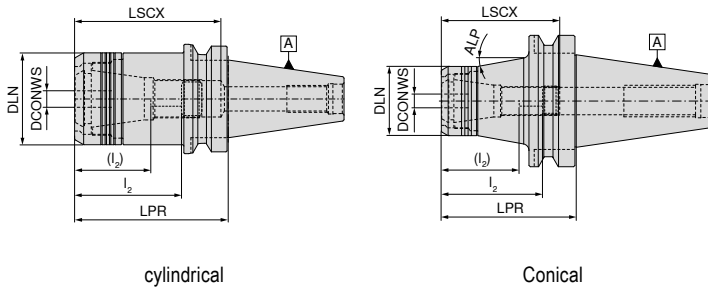

AD  
G 6,3  $n_{max}$  18000

cylindrical

**84 400 ...**



AD  
G 6,3  $n_{max}$  18000

conical

**84 400 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	ALP °	for collet		
BT 40	2 - 20	60	53	80	41 - 63 (27 - 45)		470E (ER32)		12069
BT 40	2 - 20	90	53	85	41 - 63 (27 - 45)		470E (ER32)		22069
BT 50	2 - 20	75	53	114	41 - 80 (27 - 62)	10	470E (ER32)		12068
BT 50	2 - 20	105	53	140	41 - 80 (27 - 62)	10	470E (ER32)		22068

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without backstop screw

$l_2$  = Clamping depth backstop screw 1, dimension in brackets ( $l_2$ ) = Clamping depth backstop screw 2

### Spare parts

#### DCONWS

2 - 20

Part	Quantity	Part Number
Lock nut	1	30100
Stop screw 2	1	402
Stop screw 1	1	401

### Accessories



Accessory	Part Number
ER collet	→ 268-276, 278-279
Roll key	→ 286
Roll key device	→ 286
Pull studs	→ 110-111
Others	→ 284

# HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ Also available with Balluff chip on request

### Scope of supply:

Base body with backstop screw and pressure screw

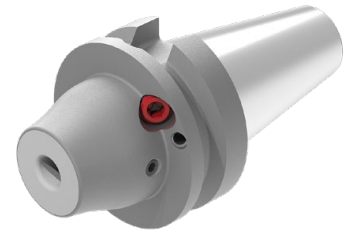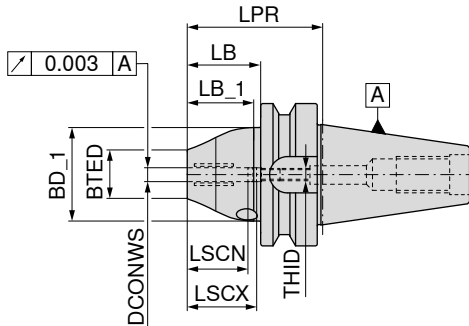

NEW



AD/B  
G 2,5 n<sub>max</sub> 25000

84 254 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	
BT 40	6	58,0	26	42	27,2	31,0	37	27	M5	10669
BT 40	8	58,0	28	42	27,2	31,0	37	27	M6	10869
BT 40	10	58,0	30	42	27,2	31,0	41	31	M8x1	11069
BT 40	12	58,0	32	49	27,2	31,0	46	36	M10x1	11269
BT 40	16	72,5	38	49	41,7	45,5	49	38	M12x1	11669
BT 40	20	72,5	38	49	41,7	45,5	51	41	M16x1	12069

→ Min. clamping depth, Page 312



Clamping key – T

80 397 ...



Pressure screw

83 950 ...



Stop screw IK

83 950 ...

### Spare parts

DCONWS					
6	SW5	050	M10x12	55000	M5x12,5 - SW2,5 418
8	SW5	050	M10x12	55000	M6x12,5 - SW3 419
10	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
12	SW5	050	M10x12	55000	M10x1x13,5 - SW5 421
16	SW5	050	M10x12	55000	M12x1x13,5 - SW5 422
20	SW5	050	M10x12	55000	M16x1x13,5 - SW8 424

### Accessories

Reduction sleeve	Pull studs	Others
→ 282	→ 110-111	→ 284




# HyPower – Complus

- ▲ High pressure chuck, short and stable version
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

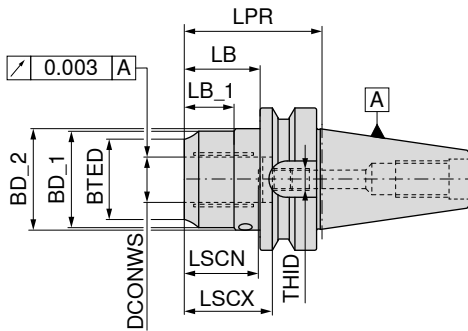


AD/B  
G 2,5 n<sub>max</sub> 25000

**83 513 ...**

Adapter	DCONWS	LPR	BTED	BD_1	BD_2	LB	LB_1	LSCX	LSCN	THID	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
BT 40	20	72,5	38					51	40	M16x1x13,5	120
BT 40	32	90,0	54	63		63,0		61	51	M16x1x13,5	13269
BT 50	20	83,5	38	49		45,5		51	41	M16x1x13,5	12068
BT 50	32	90,0	57	68	72	52,0	35	61	51	M16x1x13,5	13268

→ Min. clamping depth, Page 312



Cylindrical screw

**83 950 ...**




Clamping key – T

**80 397 ...**



Pressure screw

**83 950 ...**



Stop screw IK

**83 950 ...**

### Spare parts for Article no.

83 513 13269	M5x5 - SW2,5	157	SW5	050	M10x1x14	429	M16x1x13,5 - SW8	424
83 513 12068	M5x5 - SW2,5	157	SW5	050	M10x1x14	429	M16x1x13,5 - SW8	424
83 513 13268	M5x5 - SW2,5	157	SW5	050	M10x1x14	429	M16x1x13,5 - SW8	424

### Accessories


Reduction sleeve	Pull studs	Others
→ 282	→ 110-111	→ 284

# HyPower – Access 3°

- ▲ High pressure chuck, slim 3°
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw, pressure screw and screw plug

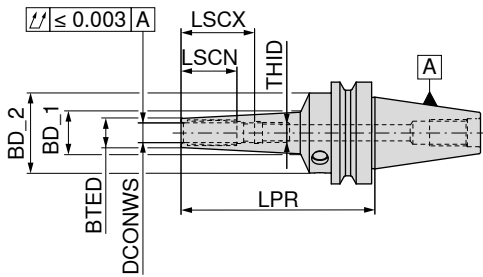

AD/B  
G 2,5 n<sub>max</sub> 25000

**83 522 ...**

	Adapter	DCONWS	LPR	BTED	BD_1	BD_2	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm	mm	mm	
medium length	BT40	3	120	9	16,55	49,5	28	12	M3	103
	BT40	4	120	10	17,55	49,5	28	16	M3	104
	BT40	5	120	11	18,55	49,5	28	20	M3	105
	BT40	6	120	12	19,55	49,5	37	27	M5	106
	BT40	8	120	14	21,55	49,5	37	27	M6	108
	BT40	10	120	16	23,65	49,5	41	31	M8x1	110
	BT40	12	120	18	25,76	49,5	46	36	M10x1	112
	BT40	16	120	24	31,45	49,5	49	39	M12x1	116
	BT40	20	120	28	35,55	49,5	51	41	M16x1	120
	BT40	6	160	16	33,53	49,5	37	27	M5	206
	BT40	8	160	18	34,60	49,5	37	27	M6	208
	BT40	10	160	20	36,27	49,5	41	31	M8x1	210
	BT40	12	160	22	37,88	49,5	46	36	M10x1	212
	BT40	6	200	16	37,88	49,5	37	27	M5	306
	BT40	8	200	18	38,90	49,5	37	27	M6	308
	BT40	10	200	20	40,57	49,5	41	31	M8x1	310
	BT40	12	200	22	42,18	49,5	46	36	M10x1	312

→ Min. clamping depth, Page 312



Cylindrical screw



Clamping key – T



Pressure screw



Stop screw IK

**83 950 ...**

**80 397 ...**

**83 950 ...**

**83 950 ...**

### Spare parts for Article no.



83 522 103	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
83 522 104	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
83 522 105	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
83 522 106	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
83 522 108	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
83 522 110	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 522 112	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M10x1x13,5 - SW5	421
83 522 116	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M12x1x13,5 - SW5	422
83 522 120	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M16x1x13,5 - SW8	424
83 522 206	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
83 522 208	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
83 522 210	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 522 212	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M10x1x13,5 - SW5	421
83 522 306	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
83 522 308	M5x5 - SW2,5	157	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
83 522 310	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
83 522 312	M5x5 - SW2,5	157	SW5	050	M10x1x12	159	M10x1x13,5 - SW5	421

# HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ Also available with Balluff chip on request

### Scope of supply:

Base body with backstop screw and pressure screw

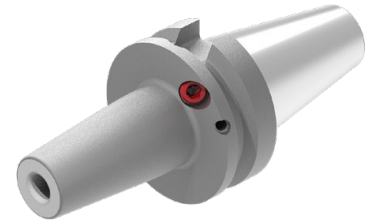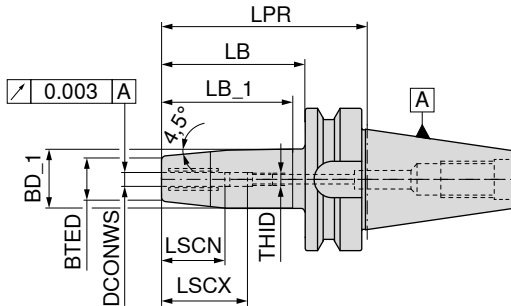

NEW



AD/B  
G 2,5 n<sub>max</sub> 25000

84 255 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	
BT 40	6	90	21	27	57,7	63	37	27	M5	10669
BT 40	8	90	21	27	57,7	63	37	27	M6	10869
BT 40	10	90	24	32	57,7	63	41	31	M8x1	11069
BT 40	12	90	24	32	57,7	63	46	36	M10x1	11269
BT 40	16	90	27	34	57,2	63	49	39	M12x1	11669
BT 40	20	90	33	42	57,5	63	51	41	M16x1	12069

→ Min. clamping depth, Page 312




Clamping key – T

80 397 ...



Pressure screw

83 950 ...



Stop screw IK

83 950 ...

### Spare parts

DCONWS					
6	SW5	050	M10x12	55000	M5x12,5 - SW2,5 418
8	SW5	050	M10x12	55000	M6x12,5 - SW3 419
10	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
12	SW5	050	M10x12	55000	M10x1x13,5 - SW5 421
16	SW5	050	M10x12	55000	M12x1x13,5 - SW5 422
20	SW5	050	M10x12	55000	M16x1x13,5 - SW8 424



Reduction sleeve

→ 282



Pull studs

→ 110–111



Others


→ 284

# HyTens – Fit

- ▲ Hydraulic chuck, short and slim version
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

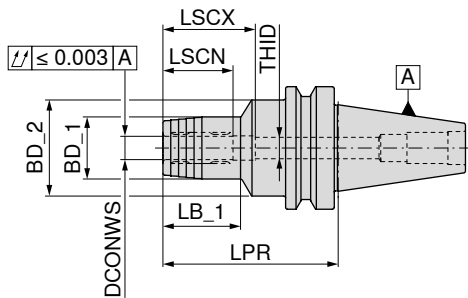

AD/B  
G 2,5 n<sub>max</sub> 25000


**83 521 ...**

Adapter	DCONWS	LPR	BD_1	BD_2	LSCX	LSCN	LB_1	THID	
	mm	mm	mm	mm	mm	mm	mm		
BT 40	6	90	26	49,5	37	27	29	M5	106
BT 40	8	90	28	49,5	37	27	30	M6	108
BT 40	10	90	30	49,5	41	31	35	M8x1	110
BT 40	12	90	32	49,5	46	36	40	M10x1	112
BT 40	16	90	38	49,5	49	39	45	M12x1	116
BT 40	20	90	42	49,5	51	41	47	M16x1	120
BT 40	25	90	55	52,0	57	47	50	M16x1	125
BT 40	32	90	63	62,0	61	51	48	M16x1	132
BT 50	6	90	26	49,5	37	27	29	M5	306
BT 50	8	90	28	49,5	37	27	30	M6	308
BT 50	10	90	30	49,5	41	31	34	M8x1	310
BT 50	12	90	32	49,5	46	36	34	M10x1	312
BT 50	16	90	38	49,5	49	39	35	M12x1	316
BT 50	20	90	42	49,5	51	41	35	M16x1	320
BT 50	25	110	55	63,0	57	47	48	M16x1	325
BT 50	32	110	63	70,0	61	51	50	M16x1	332


→ Min. clamping depth, Page 312



Pressure screw



Stop screw IK



Stop screw IK

**83 950 ...**

**83 950 ...**

**83 950 ...**

### Spare parts

DCONWS						
6	M8x1x10	439		M5x12,5 - SW2,5	418	
8	M8x1x10	439	M6x14 - SW2	417	M6x12,5 - SW3	419
10	M10x1x12	440			M8x1x13,5 - SW3	420
12	M10x1x12	440			M10x1x13,5 - SW5	421
16	M10x1x12	440			M12x1x13,5 - SW5	422
20 - 32	M10x1x12	440			M16x1x13,5 - SW8	424

### Accessories



Reduction sleeve	Pull studs	Others
→ 282	→ 110-111	→ 284

# HyTens – Compact

- ▲ Hydraulic chuck, short and stable version
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Base body with backstop screw and pressure screw

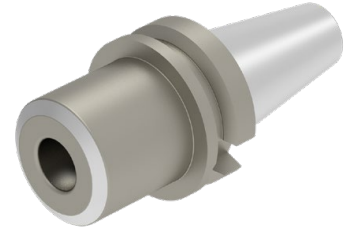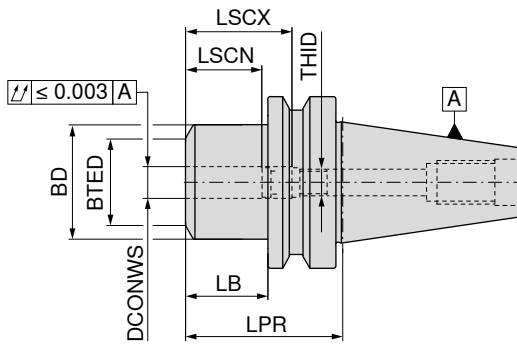

AD  
G 2,5 n<sub>max</sub> 25000

**83 430 ...**

Adapter	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCN mm	LSCX mm	THID	
BT 40	12	58,0	42	32	31,0	36	46	M8x1	<b>01269</b>
BT 40	20	72,5	49	38	45,5	41	51	M16x1	<b>02069</b>
BT 50	20	83,5	49	38	45,5	41	51	M16x1	<b>02068</b>

→ Min. clamping depth, Page 312

**Spare parts  
for Article no.**



83 430 01269			
83 430 02069			
83 430 02068			

Clamping key – T	Pressure screw	Stop screw IK
<b>80 397 ...</b>	<b>83 950 ...</b>	<b>83 950 ...</b>
050	440	420
050	440	424
050	440	424

# Shrink adapter, Slim 3°

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip on request

TG

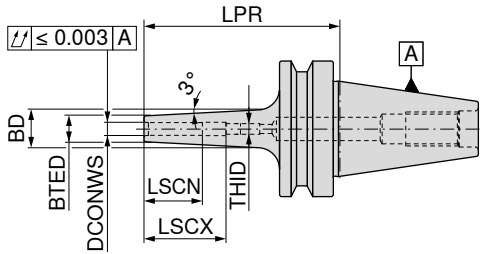

AD/B  
G 2,5 n<sub>max</sub> 25000

84 323 ...

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm		
short	BT 40	3	90	9	15	28	12	M6	103
	BT 40	4	90	10	16	28	16	M6	104
	BT 40	5	90	11	17	30	20	M6	105
	BT 40	6	90	12	18	36	26	M5	106
	BT 40	8	90	14	20	36	26	M6	108
	BT 40	10	90	16	22	41	31	M8x1	110
	BT 40	12	90	18	24	47	37	M10x1	112
	BT 40	14	90	20	26	47	37	M10x1	114
	BT 40	16	90	22	28	50	40	M12x1	116
	BT 40	18	90	24	30	50	40	M12x1	118
BT 40	20	90	26	32	52	42	M16x1	120	
medium length	BT 40	3	120	9	16	12	12		203
	BT 40	4	120	10	17	16	16		204
	BT 40	5	120	11	18	20	20		205
	BT 40	6	120	12	21	36	26	M5	206
	BT 40	8	120	14	23	36	26	M6	208
	BT 40	10	120	16	25	41	31	M8x1	210
	BT 40	12	120	18	27	47	37	M10x1	212
	BT 40	14	120	20	29	47	37	M10x1	214
	BT 40	16	120	22	31	50	40	M12x1	216
	BT 40	18	120	24	33	50	40	M12x1	218
BT 40	20	120	26	35	52	42	M16x1	220	
extra-long	BT 40	3	160	9	19	12	12		303
	BT 40	4	160	10	20	16	16		304
	BT 40	5	160	11	21	20	20		305
	BT 40	6	160	12	24	36	26	M5	306
	BT 40	8	160	14	26	36	26	M6	308
	BT 40	10	160	16	28	41	31	M8x1	310
	BT 40	12	160	18	30	47	37	M10x1	312
	BT 40	14	160	20	32	47	37	M10x1	314
	BT 40	16	160	22	34	50	40	M12x1	316
	BT 40	18	160	24	36	50	40	M12x1	318
BT 40	20	160	26	38	52	42	M16x1	320	

→ Min. clamping depth, Page 312



Stop screw IK



Stop screw IK

83 950 ...

83 950 ...



Spare parts  
DCONWS

3 - 5	M6x14 - SW2	417	
6			M5x12,5 - SW2,5 418
8			M6x12,5 - SW3 419
10			M8x1x13,5 - SW3 420
12 - 14			M10x1x13,5 - SW5 421
16 - 18			M12x1x13,5 - SW5 422
20			M16x1x13,5 - SW8 424

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

**TG**

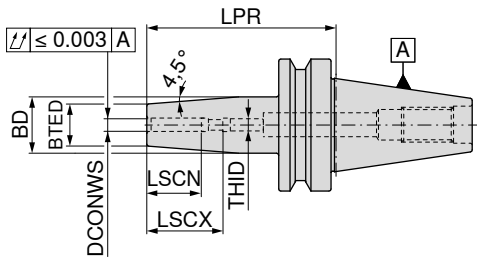

AD

G 2,5  $n_{max}$  25000



AD/B

G 2,5  $n_{max}$  25000

**84 303 ...**

**84 303 ...**

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID		
short	BT 30	3	85	10	17	28	12	M6		003
	BT 30	4	85	15	22	28	16	M6		004
	BT 30	5	85	15	22	30	20	M6		005
	BT 30	6	85	21	27	36	26	M5		006
	BT 30	8	85	21	27	36	26	M6		008
	BT 30	10	85	24	32	41	31	M8x1		010
	BT 30	12	85	24	32	47	37	M10x1		012
	BT 30	14	85	27	34	47	37	M10x1		014
	BT 30	16	85	27	34	50	40	M12x1		016
	BT 30	18	85	33	42	50	40	M12x1		018
	BT 30	20	85	33	42	52	42	M16x1		020
	BT 40	3	90	10	17	28	12	M6		103
	BT 40	4	90	15	22	28	16	M6		104
	BT 40	5	90	15	22	30	20	M6		105
	BT 40	6	90	21	27	36	26	M5		106
	BT 40	8	90	21	27	36	26	M6		108
	BT 40	10	90	24	32	41	31	M8x1		110
	BT 40	12	90	24	32	47	37	M10x1		112
	BT 40	14	90	27	34	47	37	M10x1		114
	BT 40	16	90	27	34	50	40	M12x1		116
BT 40	18	90	33	42	50	40	M12x1		118	
BT 40	20	90	33	42	52	42	M16x1		120	
BT 40	25	100	44	53	58	48	M16x1		125	
medium length	BT 40	3	120	10	20	12	12			203
	BT 40	4	120	15	22	16	16			204
	BT 40	5	120	15	22	20	20			205
	BT 40	6	120	21	27	36	26	M5		206
	BT 40	8	120	21	27	36	26	M6		208
	BT 40	10	120	24	32	41	31	M8x1		210
	BT 40	12	120	24	32	47	37	M10x1		212
	BT 40	14	120	27	34	47	37	M10x1		214
	BT 40	16	120	27	34	50	40	M12x1		216
	BT 40	18	120	33	42	50	40	M12x1		218
	BT 40	20	120	33	42	52	42	M16x1		220
BT 40	25	120	44	53	58	48	M16x1		225	
extra-long	BT 40	3	160	10	20	12	12			303
	BT 40	4	160	15	22	16	16			304
	BT 40	5	160	15	22	20	20			305
	BT 40	6	160	21	27	36	26	M5		306
	BT 40	8	160	21	27	36	26	M6		308
	BT 40	10	160	24	32	41	31	M8x1		310
	BT 40	12	160	24	32	47	37	M10x1		312
	BT 40	14	160	27	34	47	37	M10x1		314
	BT 40	16	160	27	34	50	40	M12x1		316
	BT 40	18	160	33	42	50	40	M12x1		318
	BT 40	20	160	33	42	52	42	M16x1		320
BT 40	25	160	44	53	58	48	M16x1		325	

→ Min. clamping depth, Page 312

# Spare parts heat shrink adapter 4.5°




		83 950 ...	83 950 ...
<b>Spare parts</b>			
<b>DCONWS</b>			
3 - 5	M6x14 - SW2	<b>417</b>	
6			M5x12,5 - SW2,5 <b>418</b>
8			M6x12,5 - SW3 <b>419</b>
10			M8x1x13,5 - SW3 <b>420</b>
12 - 14			M10x1x13,5 - SW5 <b>421</b>
16 - 18			M12x1x13,5 - SW5 <b>422</b>
20 - 25			M16x1x13,5 - SW8 <b>424</b>



# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

TG

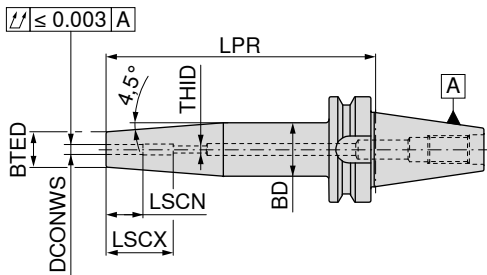

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 310 ...**


	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	
short	BT 40	3	90	11	15				10369
	BT 40	4	90	11	15				10469
	BT 40	5	90	11	15				10569
	BT 40	6	90	21	27	36	26	M5	10669
	BT 40	8	90	21	27	36	26	M6	10869
	BT 40	10	90	24	34	41	31	M8x1	11069
	BT 40	12	90	24	34	46	36	M10x1	11269
	BT 40	14	90	27	34	46	36	M10x1	11469
	BT 40	16	90	27	34	49	39	M12x1	11669
	BT 40	18	90	33	42	49	39	M12x1	11869
	BT 40	20	90	33	42	51	41	M16x1	12069
	BT 40	25	100	44	53	57	47	M16x1	12569
	BT 50	6	100	21	27	36	26	M5	10668
	BT 50	8	100	21	27	36	26	M6	10868
	BT 50	10	100	24	32	41	31	M8x1	11068
	BT 50	12	100	24	32	47	37	M10x1	11268
	BT 50	14	100	27	34	47	37	M10x1	11468
	BT 50	16	100	27	34	50	40	M12x1	11668
	BT 50	18	100	33	42	50	40	M12x1	11868
	BT 50	20	100	33	42	52	42	M16x1	12068
	BT 50	25	100	44	53	58	48	M16x1	12568
	BT 50	32	100	44	53	62	52	M16x1	13268
medium length	BT 50	6	120	21	27	36	26	M5	20668
	BT 50	8	120	21	27	36	26	M6	20868
	BT 50	10	120	24	32	41	31	M8x1	21068
	BT 50	12	120	24	32	47	37	M10x1	21268
	BT 50	14	120	27	34	47	37	M10x1	21468
	BT 50	16	120	27	34	50	40	M12x1	21668
	BT 50	18	120	33	42	50	40	M12x1	21868
	BT 50	20	120	33	42	52	42	M16x1	22068
	BT 50	25	120	44	53	58	48	M16x1	22568
	BT 50	32	120	44	53	62	52	M16x1	23268

→ Min. clamping depth, Page 312

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

**TG**

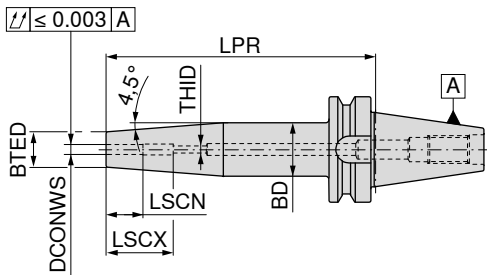

AD/B  
G 2,5 n<sub>max</sub> 25000

**82 310 ...**

Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID		
extra-long	BT 40	6	160	21	27	36	26	M5	30669
	BT 40	8	160	21	27	36	26	M6	30869
	BT 40	10	160	24	34	41	31	M8x1	31069
	BT 40	12	160	24	34	46	36	M10x1	31269
	BT 40	14	160	27	34	46	36	M10x1	31469
	BT 40	16	160	27	34	49	39	M12x1	31669
	BT 40	18	160	33	42	49	39	M12x1	31869
	BT 40	20	160	33	42	51	41	M16x1	32069
	BT 40	25	160	44	53	57	47	M16x1	32569
	BT 50	6	160	21	27	36	26	M5	30668
	BT 50	8	160	21	27	36	26	M6	30868
	BT 50	10	160	24	32	41	31	M8x1	31068
	BT 50	12	160	24	32	47	37	M10x1	31268
	BT 50	14	160	27	34	47	37	M10x1	31468
	BT 50	16	160	27	34	50	40	M12x1	31668
	BT 50	18	160	33	42	50	40	M12x1	31868
	BT 50	20	160	33	42	52	42	M16x1	32068
	BT 50	25	160	44	53	58	48	M16x1	32568
BT 50	32	160	44	53	62	52	M16x1	33268	

→ Min. clamping depth, Page 312



Stop screw IK

**82 950 ...**


**Spare parts**

**DCONWS**

6	M5x16 - SW2,5	30000
8	M6x16 - SW3	30100
10	M8x1x16 - SW4	30200
12 - 14	M10x1x14 - SW5	30300
16 - 18	M12x1x16 - SW6	30400
20 - 32	M16x1x16 - SW8	30500

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

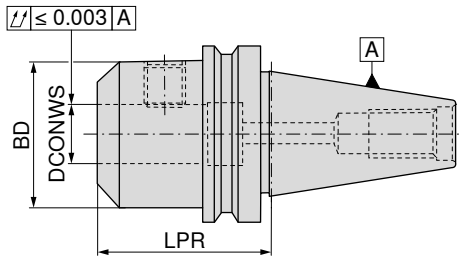

AD  
G 2,5 n<sub>max</sub> 25000

82 741 ...

	Adapter	DCONWS <sup>H4</sup> mm	LPR mm	BD mm	
short	BT 30	6	50	25	10670
	BT 30	8	50	28	10870
	BT 30	10	50	35	11070
	BT 30	12	55	42	11270
	BT 30	14	55	44	11470
	BT 30	16	63	48	11670
	BT 30	18	63	50	11870
	BT 30	20	63	52	12070
extra short	BT 40	16	35	48	01669
	BT 40	20	35	50	02069
	BT 40	25	40	50	02569 <sup>1)</sup>
	BT 40	32	75	72	03269 <sup>1)</sup>

1) Version with two grub screws



Grubscrew


62 950 ...

### Spare parts

#### DCONWS

6	M6x10	006
8	M8x10	008
10	M10x12	010
12 - 14	M12x16	012
16 - 18	M14x16	016
20	M16x16	020
25	M18x2x20	025
32	M20x2x20	032

### Accessories



Pull studs



Others

→ 110-111

→ 284

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

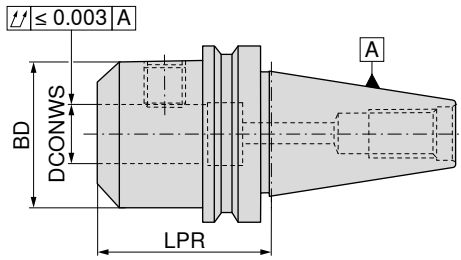

AD/B  
G 2,5 n<sub>max</sub> 25000


**82 740 ...**

	Adapter	DCONWS <sup>H4</sup> mm	LPR mm	BD mm	
short	BT 40	6	50	25	10669
	BT 40	8	50	28	10869
	BT 40	10	63	35	11069
	BT 40	12	63	42	11269
	BT 40	14	63	44	11469
	BT 40	16	63	48	11669
	BT 40	18	63	50	11869
	BT 40	20	63	52	12069
	BT 40	25	100	65	12569
	BT 40	32	100	72	13269 <sup>1)</sup>
	BT 40	40	120	80	14069 <sup>1)</sup>
	BT 50	6	63	25	10668
	BT 50	8	63	28	10868
	BT 50	10	80	35	11068
BT 50	12	80	42	11268	
BT 50	14	80	44	11468	
BT 50	16	80	48	11668	
BT 50	18	80	50	11868	
BT 50	20	80	52	12068	
BT 50	25	100	65	12568 <sup>1)</sup>	
BT 50	32	105	72	13268 <sup>1)</sup>	
BT 50	40	120	80	14068 <sup>1)</sup>	
medium length	BT 40	6	100	25	20669
	BT 40	8	100	28	20869
	BT 40	10	100	35	21069
	BT 40	12	100	42	21269
	BT 40	14	100	44	21469
	BT 40	16	100	48	21669
	BT 40	18	100	50	21869
	BT 40	20	100	52	22069
	BT 50	6	100	25	20668
	BT 50	8	100	28	20868
	BT 50	10	100	35	21068
	BT 50	12	100	42	21268
	BT 50	14	100	44	21468
	BT 50	16	100	48	21668
BT 50	18	100	50	21868	
BT 50	20	100	52	22068	
BT 50	25	120	65	22568 <sup>1)</sup>	

1) Version with two grub screws

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

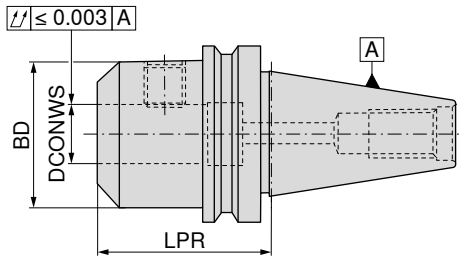

**NEW**



AD/B  
G 2,5 n<sub>max</sub> 25000

**82 740 ...**

	Adapter	DCONWS	LPR	BD	
		mm			
extra-long	BT 40	6	160	25	40669
	BT 40	8	160	28	40869
	BT 40	10	160	35	41069
	BT 40	12	160	42	41269
	BT 40	14	160	44	41469
	BT 40	16	160	48	41669
	BT 40	18	160	50	41869
	BT 40	20	160	52	42069
	BT 40	25	160	65	42569 <sup>1)</sup>
	BT 50	6	160	25	40668
	BT 50	8	160	28	40868
	BT 50	10	160	35	41068
	BT 50	12	160	42	41268
	BT 50	14	160	44	41468
	BT 50	16	160	48	41668
	BT 50	18	160	50	41868
	BT 50	20	160	52	42068
	BT 50	25	160	65	42568 <sup>1)</sup>
	BT 50	32	160	72	43268 <sup>1)</sup>



1) Version with two grub screws



The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

# Cylindrical Shank Adapter (Whistle Notch)

- ▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
- ▲ The groove in the flat face is a characteristic feature of the Whistle Notch version
- ▲ also available with Balluff chip **on request**

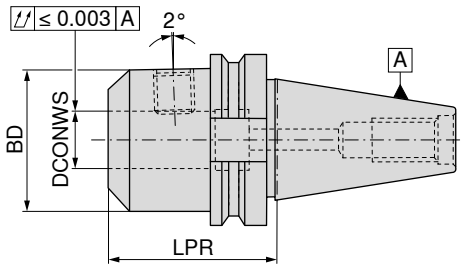





AD/B  
G 2,5  $n_{max}$  25000

82 742 ...



	Adapter	DCONWS <sub>H4</sub> mm	LPR mm	BD mm	
short	BT 40	6	50	25	10669
	BT 40	8	50	28	10869
	BT 40	10	63	35	11069
	BT 40	12	63	42	11269
	BT 40	14	63	44	11469
	BT 40	16	63	48	11669
	BT 40	18	63	50	11869
	BT 40	20	63	52	12069
	BT 40	25	100	65	12569 <sup>1)</sup>
	BT 40	32	100	72	13269 <sup>1)</sup>
	BT 40	40	120	80	14069 <sup>1)</sup>
	BT 50	6	63	25	10668
	BT 50	8	63	28	10868
	BT 50	10	80	35	11068
BT 50	12	80	42	11268	
BT 50	14	80	44	11468	
BT 50	16	80	48	11668	
BT 50	18	80	50	11868	
BT 50	20	80	52	12068	
BT 50	25	100	65	12568 <sup>1)</sup>	
BT 50	32	105	72	13268 <sup>1)</sup>	
long	BT 40	6	130	25	30669
	BT 40	8	130	28	30869
	BT 40	10	130	35	31069
	BT 40	12	130	42	31269
	BT 40	16	130	48	31669
	BT 40	20	130	52	32069
	BT 40	25	130	65	32569 <sup>1)</sup>
	BT 50	6	130	25	30668
	BT 50	8	130	28	30868
	BT 50	10	130	35	31068
	BT 50	12	130	42	31268
	BT 50	16	130	48	31668
	BT 50	20	130	52	32068
	BT 50	25	130	65	32568 <sup>1)</sup>
BT 50	32	130	72	33268 <sup>1)</sup>	

1) Version with two grub screws

## Spare parts cylindrical shank adaptors (Weldon and Whistle Notch)


				
	10 950 ...	62 950 ...	62 950 ...	84 950 ...
<b>Spare parts</b>				
<b>DCONWS<sub>H4</sub></b>				
6			M6x10	<b>006</b> M5x20 <b>44100</b>
8			M8x10	<b>008</b> M6x20 <b>21500</b>
10			M10x12	<b>010</b> M8x16 <b>44200</b>
12 - 14	M10X20 DIN 913		M12x16	<b>012</b>
16 - 18			M14x16	<b>016</b> M12x20 <b>44300</b>
20		M16x20 - SW8	M16x16	<b>020</b>
25			M18x2x20	<b>025</b> M20x24 <b>44000</b>
32 - 40			M20x2x20	<b>032</b> M20x24 <b>44000</b>

### Accessories

	
Pull studs	Others
→ 110-111	→ 284

# Indexable insert drill adapter ISO 7388- 2 – MAS-BT

▲ also available with Balluff chip on request

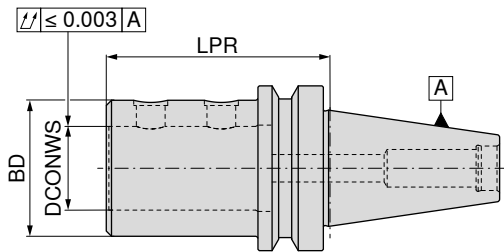

**NEW**



AD/B  
G 6,3 n<sub>max</sub> 15000

**82 748 ...**

Adapter	DCONWS mm	LPR mm	BD mm	
BT 40	20	75	40	12069
BT 40	25	80	45	12569
BT 40	32	85	52	13269
BT 50	20	85	40	12068
BT 50	25	90	45	12568
BT 50	32	95	52	13268
BT 50	40	105	65	14068
BT 50	50	113	75	15068

**1** Suitable eccentric sleeves can be found in → **Chapter 3, Indexable insert drilling.**



**10 950 ...**

**Spare parts**  
**DCONWS**

20	M10x1x10	001
25 - 32	M12x1x10	002
40 - 50	M16x1x12	003

**Accessories**

Pull studs	Others
→ 110-111	→ 284




# ER Precision Collet chuck – PCC

- ▲ For standard or sealing disc lock nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 100$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with lock nut and backstop screw

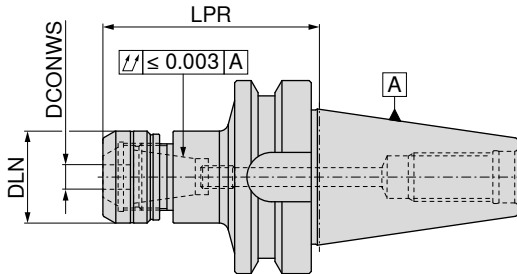

AD/B  
G 2,5  $n_{max}$  25000

**82 700 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	for collet	Torque moment / Clamping force Nm	
BT 40	1 - 10	70	30	426E (ER16)	40 / 2-70	11069
BT 40	1 - 10	100	30	426E (ER16)	40 / 2-70	21069
BT 40	2 - 16	70	40	430E (ER25)	80 / 10-160	11669
BT 40	2 - 16	100	40	430E (ER25)	80 / 10-160	21669
BT 40	2 - 20	70	50	470E (ER32)	125 / 15-250	12069
BT 40	2 - 20	100	50	470E (ER32)	125 / 15-250	22069
BT 50	2 - 16	80	40	430E (ER25)	80 / 10-160	11668
BT 50	2 - 16	100	40	430E (ER25)	80 / 10-160	21668
BT 50	2 - 20	80	50	470E (ER32)	125 / 15-250	12068
BT 50	2 - 20	100	50	470E (ER32)	125 / 15-250	22068



Dimension LPR is 4.5 mm longer for ER16 and ER32 and 5.0 mm longer for ER25 when using thro' coolant lock nut

	Lock nut IK 82 950 ...	Lock nut 82 950 ...	Backstop screw PCC 2 82 950 ...	Backstop screw PCC 1 82 950 ...
<b>Spare parts for collet</b>				
426E (ER16)	11000	01000		M8X3,0 00100
430E (ER25)	11600	01600	M18x1,5 00200	M8x8 00300
470E (ER32)	12000	02000	M18x1,5 00200	M8x8 00300

### Accessories



ER collet	Sealing ring	Roll key
→ 268-276, 278-279	→ 281	→ 286

# ER-Collet chuck

▲ also available with Balluff chip on request

## Scope of supply:

Holder with lock nut and adjustable back stop

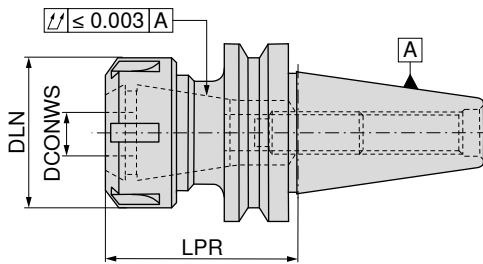

AD  
G 2,5 n<sub>max</sub> 25000

82 743 ...



AD/B  
G 2,5 n<sub>max</sub> 25000

82 743 ...

	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet		
short	BT 30	1 - 10	70	28	56	426E (ER16)		
	BT 30	1 - 16	70	42	104	430E (ER25)		11070 <sup>1)</sup>
	BT 30	2 - 20	70	50	136	470E (ER32)		11670
								12070
	BT 40	1 - 10	60	22	56	426E (ER16 mini)		
	BT 40	1 - 10	60	28	56	426E (ER16)		11169
	BT 40	1 - 16	70	42	104	430E (ER25)		11069 <sup>1)</sup>
	BT 40	2 - 20	70	50	136	470E (ER32)		11669
	BT 40	3 - 26	70	63	176	472E (ER40)		12069
								12669
	BT 50	1 - 10	75	28	56	426E (ER16)		11068 <sup>1)</sup>
	BT 50	1 - 16	75	42	104	430E (ER25)		11668
BT 50	2 - 20	75	50	136	470E (ER32)		12068	
BT 50	4 - 26	75	63	176	472E (ER40)		12668	
medium length	BT 30	1 - 10	100	28	56	426E (ER16)		21070 <sup>1)</sup>
	BT 30	1 - 16	100	42	104	430E (ER25)		21670
	BT 40	1 - 10	120	22	56	426E (ER16 mini)		
	BT 40	1 - 10	120	28	56	426E (ER16)		21169
	BT 40	1 - 16	120	42	104	430E (ER25)		21069 <sup>1)</sup>
	BT 40	2 - 20	120	50	136	470E (ER32)		21669
	BT 40	3 - 26	100	63	176	472E (ER40)		22069
								22669
	BT 50	1 - 10	100	28	56	426E (ER16)		21068 <sup>1)</sup>
	BT 50	1 - 16	100	42	104	430E (ER25)		21668
	BT 50	2 - 20	100	50	136	470E (ER32)		22068
	BT 50	3 - 26	100	63	176	472E (ER40)		22668
extra-long	BT 40	1 - 10	160	28	56	426E (ER16)		41069 <sup>1)</sup>
	BT 40	1 - 16	160	42	104	430E (ER25)		41669
	BT 40	2 - 20	160	50	136	470E (ER32)		42069
	BT 40	3 - 26	160	63	176	472E (ER40)		42669
	BT 50	1 - 16	160	42	104	430E (ER25)		41668
	BT 50	2 - 20	160	50	136	470E (ER32)		42068

1) with 6 position lock nut

Spare parts for collet	Lock nut	Lock nut IK	Lock nut	Y clamping key	ER Mini clamping key	Mini lock nut	Mini IK	Stop screw IK
	62 950 ...	83 950 ...	62 950 ...	83 357 ...	83 950 ...	62 950 ...	83 950 ...	84 950 ...
426E (ER16 mini)					101	066	058	44600
426E (ER16)	044							44600
430E (ER25)		055	055	125				44400
470E (ER32)		056	65600	132				44400
472E (ER40)		057	65700	140				44500


1) Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

# Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Toolholder including clamping key SW4

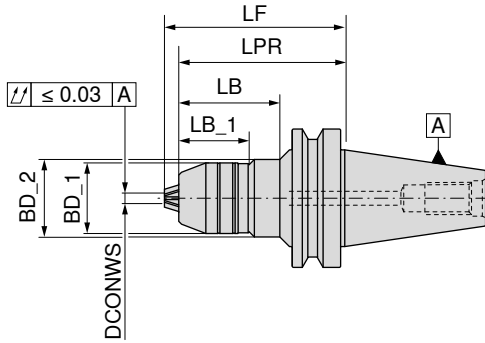

A  
G 6,3 n<sub>max</sub> 10000

**84 509 ...**



AD  
G 6,3 n<sub>max</sub> 10000

**84 510 ...**

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LPR mm	LF mm		
BT 40	0,5 - 13	48,5		50,9	80	80	89,0		
BT 40	2,5 - 16	51,0		50,9	80	80	90,5		
BT 50	2,5 - 16	51,0	56	50,9	73	120	130,5	<b>516</b>	<b>516</b>

**Accessories**




Others  
→ 284

Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

# Synchro tapping chuck with minimum length compensation

- ▲ For collets according to DIN 6499
- ▲ With length compensation under tension 1,0 mm and under compression 0,2 mm (LZD)
- ▲  $p_{max} = 50$  bar
- ▲ for synchro use
- ▲ also available with Balluff chip **on request**

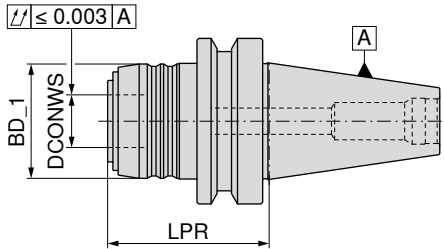

AD

83 515 ...

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm
BT 40	M3 - M12	1	61	43	20	1,0 / 0,2
BT 40	M6 - M20	2	82	60	32	1,0 / 0,2
BT 50	M3 - M12	1	72	43	20	1,0 / 0,2
BT 50	M6 - M20	2	93	60	32	1,0 / 0,2

012  
020  
  
112  
120

## Accessories




Pull studs	Others
110–111	284

# Insert for synchro quick change tapping chuck with minimum length compensation

▲ SZID = for insert size

### Scope of supply:


Includes lock nut

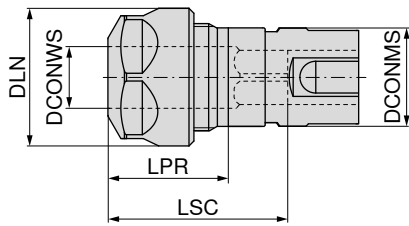


83 608 ...

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	012 <sup>1)</sup>
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	020


1) with 6 position lock nut




62 950 ...



83 950 ...



62 950 ...




83 357 ...

### Spare parts for Article no.

83 608 012	M22x1,5 - SW25	044	M22x1,5	054	M22x1,5	054	116
83 608 020			M32x1,5	055	M32x1,5	055	125

# Quick change tap chuck with length compensation

- ▲ With length compensation under tension and compression (LZD)
- ▲ also available with Balluff chip **on request**

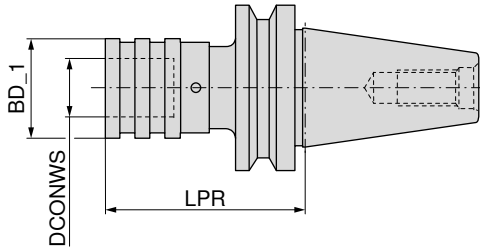

A

83 528 ...

Adapter	cutting range	SZID	LPR	BD_1	DCONWS	LZD±	
			mm	mm	mm	mm	
BT 30	M3 - M12	01	63	38	19	9	312
BT 30	M6 - M20	02	96	55	31	15	320
BT 40	M3 - M12	01	68	38	19	9	412
BT 40	M6 - M20	02	93	55	31	15	420
BT 50	M3 - M12	01	80	38	19	9	512
BT 50	M6 - M20	02	102	55	31	15	520

## Accessories


		
Collet	Pull studs	Others
→ 288, 290-292	→ 110-111	→ 284

## Adapter with ABS Connection

▲ also available with Balluff chip on request

### Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

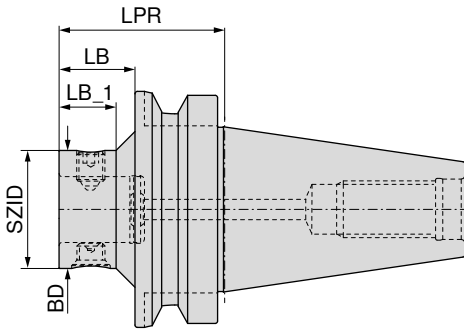

AD



AD/B

84 202 ...

84 212 ...

Adapter	KOMET no.	SZID	BD	LPR	LB	LB_1		
			mm	mm	mm	mm		
BT 40	A55 00120	ABS 25	25	60	33	25		
BT 40	A55 00130	ABS 32	32	60	33		04090	
BT 40	A55 00140	ABS 40	40	60	33		04089	
BT 40	A55 55150	ABS 50	50	60	33		04088	
BT 40	A55 55160	ABS 63	63	70				04097
								04096
BT 50	A55 00330	ABS 32	32	70	32	24	05089	
BT 50	A55 00340	ABS 40	40	70	32	24	05088	
BT 50	A55 55350	ABS 50	50	70	32	24		05097
BT 50	A55 55360	ABS 63	63	80	42	37		05096
BT 50	A55 55370	ABS 80	80	100	62			05092
BT 50	A55 55380	ABS 100	100	110				05091

## Conversion kit – SK



84 950 ...


for	Adapter	
4 mm	SK 40	23200
6 mm	SK 50	23400

## Eccentric adjuster with ABS Connection

- ▲ Adjustment  $\pm 0.25$  mm on diameter
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

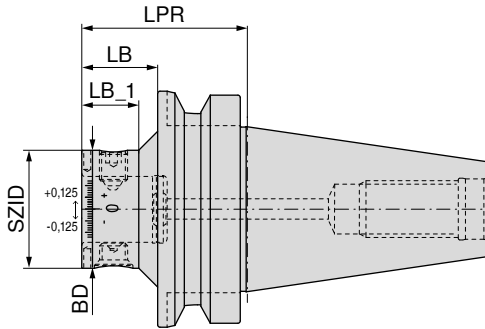

AD



AD/B

Adapter	KOMET no.	SZID	BD	LPR	LB	LB_1
			mm	mm	mm	mm
BT 40	A55 56150	ABS 50	50	60	33	
BT 40	A55 56160	ABS 63	63	70		
BT 50	A55 56350	ABS 50	50	70	32	24
BT 50	A55 56360	ABS 63	63	80	42	37

84 205 ...

84 205 ...

04096

04097

05096

05097





# Torsional vibration dampers with ABS Connection

▲ also available with Balluff chip on request

## Scope of supply:


Steep taper adapter (Form B) with conversion kit (Form AD) and sealing disc

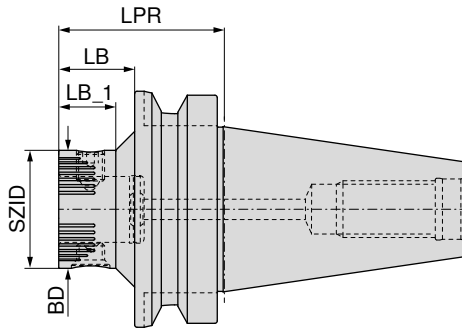

AD/B


84 208 ...

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	LB_1 mm	
BT 40	A55 02150	ABS 50	50	60	33		04097
BT 40	A55 02160	ABS 63	63	70			04096
BT 50	A55 02350	ABS 50	50	70	32	24	05097
BT 50	A55 02360	ABS 63	63	80	42	37	05096



Clamping screw

84 950 ...



Taper screw

84 950 ...

## Spare parts

### SZID


ABS 50	20300	20400
ABS 63	25500	27300

## Accessories

Pull studs	Extension	Others
→ 110-111	→ 187	→ 284

# Adapter for milling cutters with threaded end

▲ also available with Balluff chip on request

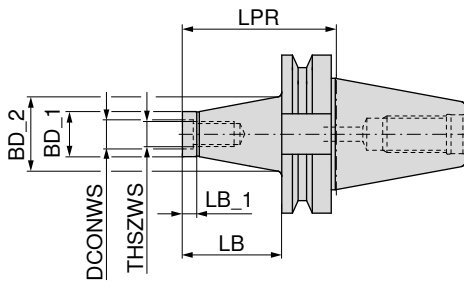

AD  
G 6,3 n<sub>max</sub> 18000

**56 711 ...**

Adapter	THSZWS	DCONWS	LB	BD_1	BD_2	LB_1	LPR	
		mm	mm	mm	mm	mm	mm	
BT 40	M8	8,5	25	13,8	15	12	52	081
BT 40	M8	8,5	50	13,8	23	12	77	082
BT 40	M8	8,5	75	13,8	25	12	102	083
BT 40	M10	10,5	25	18,0	23	12	52	101
BT 40	M10	10,5	50	18,0	25	12	77	102
BT 40	M10	10,5	75	18,0	30	12	102	103
BT 40	M12	12,5	25	21,0	24	12	52	121
BT 40	M12	12,5	50	21,0	30	12	77	122
BT 40	M12	12,5	75	21,0	35	12	102	123
BT 40	M12	12,5	100	21,0	38	12	127	124
BT 40	M16	17,0	25	29,0	29	12	52	161
BT 40	M16	17,0	50	29,0	34	12	77	162
BT 40	M16	17,0	75	29,0	35	12	102	163
BT 40	M16	17,0	100	29,0	40	12	127	164

## Accessories


Extension-Reduction set → 257	Pull studs → 110-111	Others → 284

# Combination shell mill adapter

- ▲ For milling cutters with transverse or longitudinal groove according to DIN 6358
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Toolholder with clamping screw, driving ring and dowel spring

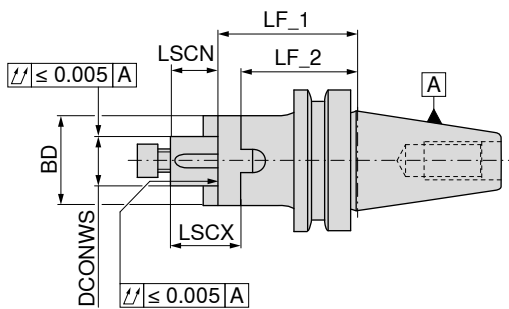

A  
G 2,5 n<sub>max</sub> 25000

**82 744 ...**

	Adapter	DCONWS mm	LF_1 mm	BD mm	LSCX mm	LSCN mm	LF_2 mm		
short	BT 30	16	45	32	27	17	35	11670	
	BT 30	22	47	40	31	19	35	12270	
	BT 30	27	49	46	33	21	37	12770	
	BT 40	16	55	32	27	17	45	11669	
	BT 40	22	55	40	31	19	43	12269	
	BT 40	27	55	48	33	21	43	12769	
	BT 40	32	60	58	38	24	46	13269	
	BT 40	40	60	70	41	27	46	14069 <sup>1)</sup>	
	BT 50	16	70	32	27	17	60	11668	
	BT 50	22	70	40	31	19	58	12268	
	BT 50	27	70	48	33	21	58	12768	
	BT 50	32	70	58	38	24	56	13268	
	BT 50	40	70	70	41	27	56	14068 <sup>1)</sup>	
	medium length	BT 30	16	80	32	27	17	70	21670
		BT 30	22	80	40	31	19	68	22270
BT 30		27	90	48	33	21	78	22770	
BT 40		16	100	32	27	17	90	21669	
BT 40		22	100	40	31	19	88	22269	
BT 40		27	100	48	33	21	88	22769	
BT 40		32	100	58	38	24	86	23269	
BT 40		40	100	70	41	27	86	24069 <sup>1)</sup>	

1) With cross screw



Parallel key



Drive ring



Cross nut key



Cross screw



clamping screw

**83 950 ...**

**83 370 ...**

**83 368 ...**

**83 367 ...**

**83 950 ...**

### Spare parts

DCONWS		83 950 ...	83 370 ...	83 368 ...		83 367 ...		83 950 ...
16	4 x 4 x 20	284	116	116	M8	016	M8x25	113
22	6 x 6 x 25	285	122	122	M10	022	M10x25	124
27	7 x 7 x 25	286	127	127	M12	027	M12x30	125
32	8 x 7 x 28	287	132	132	M16	032	M16x35	126
40	10 x 8 x 32	288	140	140	M20	040	M20x40 - SW17	112

### Accessories


Pull studs	Milling Adapter Rings	Others
→ 110-111	→ 263	→ 284

# Shell mill adapter with reduced flange diameter

- ▲ Screwed drive dogs
- ▲ also available with Balluff chip on request

**Scope of supply:**

Base body with retaining screw and drive dog

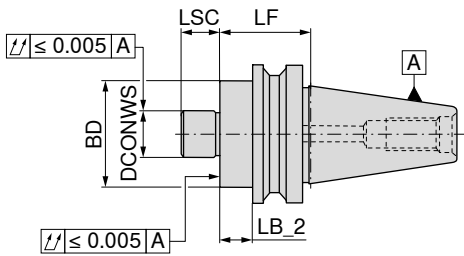

**NEW**




AD

G 2,5 n<sub>max</sub> 25000

**82 315 ...**

	Adapter	DCONWS mm	BD mm	LB_2 mm	LF mm	LSC mm	
short	BT 40	22	38	33	60	19	12269
	BT 40	27	48	25	52	21	12769
	BT 50	22	38	22	60	19	12268
	BT 50	27	48	25	63	21	12768

**i** These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters. Now they can be clamped perfectly, thanks to the adapted flange diameters.



Screw for drivers



Driver



clamping screw



Spare parts	DCONWS		83 950 ...	83 950 ...	83 950 ...
22	M4x8	51700	10x7x20,5	51500	M10x25 124
27	M5x8	51800	12x9x24,3	51600	M12x30 125

# Shell mill adapter

- ▲ With fixed drive dogs and enlarged contact face for milling cutters with transverse groove
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Toolholder with clamping screw

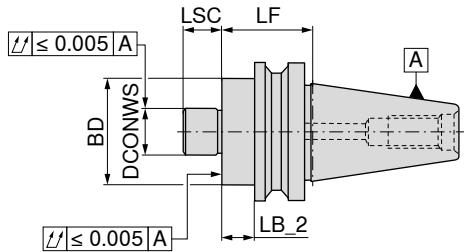

**NEW**



AD

G 2,5 n<sub>max</sub> 25000

**82 745 ...**

**NEW**



AD/B


G 2,5 n<sub>max</sub> 25000

**82 745 ...**


	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm		
short	BT 30	16	18	40	38	17		11670
	BT 30	22	18	40	48	19		12270
	BT 30	27	18	50	58	21		12770
	BT 30	32	28	50	78	24		13270
	BT 40	16	25	52	38	17		
	BT 40	22	25	52	48	19		11669
	BT 40	27	25	52	58	21		12269
	BT 40	32	23	50	78	24		12769
	BT 40	40	23	50	88	27		13269
	BT 40							14069 <sup>1)</sup>
	BT 50	16	25	63	38	17		11668
	BT 50	22	25	63	48	19		12268
	BT 50	27	25	63	58	21		12768
	BT 50	32	22	60	78	24		13268
	BT 50	40	22	60	88	27		14068 <sup>1)</sup>
medium length	BT 40	16	73	100	38	17		
	BT 40	22	73	100	48	19		21669
	BT 40	27	73	100	58	21		22269
	BT 40	32	73	100	78	24		22769
	BT 40	40	73	100	88	27		23269
	BT 40							24069 <sup>1)</sup>
	BT 50	16	62	100	38	17		21668
	BT 50	22	62	100	48	19		22268
	BT 50	27	62	100	58	21		22768
	BT 50	32	62	100	78	24		23268
BT 50	40	62	100	88	27		24068 <sup>1)</sup>	
long	BT 40	16	103	130	38	17		
	BT 40	22	103	130	48	19		31669
	BT 40	27	103	130	58	21		32269
	BT 40	32	103	130	78	24		32769
	BT 40	40	103	130	88	27		33269
	BT 40							34069 <sup>1)</sup>
	BT 50	16	92	130	38	17		31668
	BT 50	22	92	130	48	19		32268
	BT 50	27	92	130	58	21		32768
	BT 50	32	92	130	78	24		33268
BT 50	40	92	130	88	27		34068 <sup>1)</sup>	
extra-long	BT 40	16	133	160	38	17		
	BT 40	22	133	160	48	19		41669
	BT 40	27	133	160	58	21		42269
	BT 40	32	133	160	78	24		42769
	BT 40	40	133	160	88	27		43269
	BT 40							44069 <sup>1)</sup>
	BT 50	16	122	160	38	17		41668
	BT 50	22	122	160	48	19		42268
	BT 50	27	122	160	58	21		42768
	BT 50	32	122	160	78	24		43268
BT 50	40	122	160	88	27		44068 <sup>1)</sup>	

1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!

## Spare parts facemill adaptors

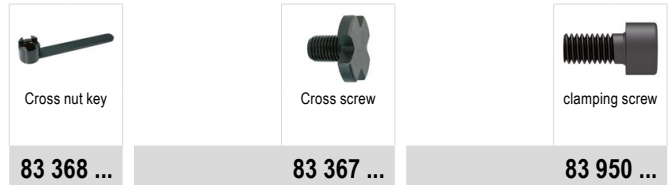

	83 368 ...		83 367 ...		83 950 ...
<b>Spare parts</b>					
<b>DCONWS</b>					
16	<b>116</b>	M8	<b>016</b>	M8x25	<b>113</b>
22	<b>122</b>	M10	<b>022</b>	M10x25	<b>124</b>
27	<b>127</b>	M12	<b>027</b>	M12x30	<b>125</b>
32	<b>132</b>	M16	<b>032</b>	M16x35	<b>126</b>
40	<b>140</b>	M20	<b>040</b>	M20x40 - SW17	<b>112</b>

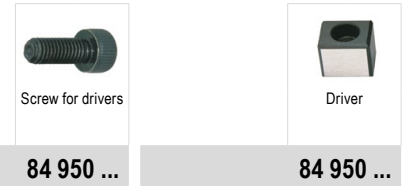

			84 950 ...		84 950 ...
<b>Spare parts</b>					
<b>DCONWS</b>					
16		M3x12	<b>162</b>	8x9,8x10	<b>43400</b>
22		M4x10	<b>163</b>	10x11,2x12	<b>43200</b>
27		M4x16	<b>164</b>	12x12,6x14	<b>43300</b>
32		M5x16	<b>166</b>	14x14x22,5	<b>160</b>
40		M5x16	<b>166</b>	16x16x23	<b>161</b>

### Accessories



Pull studs	Extensions	Others
→ 110-111	→ 262	→ 284

# Large diameter facemill adapter

- ▲ For milling cutters with keyway or drive slot DIN 6357
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder with integrated drive dogs according to DIN 2079 and 4 fixation screws

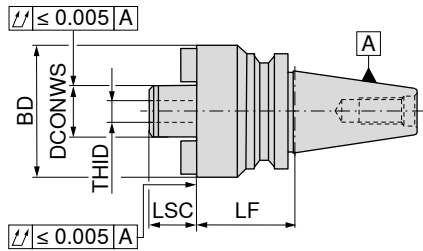

A  
G 6,3 n<sub>max</sub> 8000

**82 432 ...**

Adapter	DCONWS mm	LF mm	BD mm	LSC mm	THID	
BT 50	40	70	89	30	M20	<b>14068</b>
BT 50	60	80	129	40	M30	<b>16068</b>



Screw for drivers



Driver



clamping screw

**84 950 ...**

**84 950 ...**

**83 950 ...**

### Spare parts

#### DCONWS

40	M5x16	<b>166</b>	16x16x23	<b>161</b>	M12x50	<b>140</b>
60	M12x25	<b>43500</b>	25,4x25x26,5	<b>43100</b>	M16x45	<b>160</b>

### Accessories



Pull studs

→ **110-111**




Others

→ **284**

# Taper sleeve adapter DIN6383 for DIN 228-2D Morse taper shanks

▲ also available with Balluff chip on request

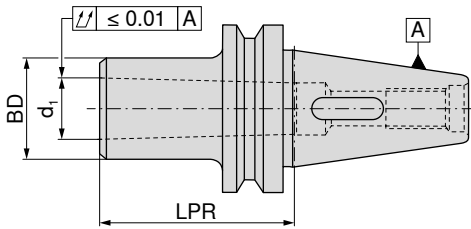

**NEW**



AD

G 6,3 n<sub>max</sub> 12000

**82 746 ...**

Adapter	d <sub>1</sub>	LPR	BD	
		mm	mm	
BT 30	MK1	50	25	11070
BT 30	MK2	60	32	12070
BT 30	MK3	77	40	13070
BT 40	MK1	50	25	11069
BT 40	MK2	50	32	12069
BT 40	MK3	70	40	13069
BT 40	MK4	95	48	14069
BT 50	MK1	45	25	11068
BT 50	MK2	60	32	12068
BT 50	MK3	65	40	13068
BT 50	MK4	95	48	14068
BT 50	MK5	105	63	15068

## Accessories

		
Morse taper adapter sleeve	Pull studs	Others
→ 242	→ 110-111	→ 284





## Milling adapter sleeve

- ▲ For mounting steep taper adapters according to DIN 2080
- ▲ With an extended retaining screw, adapters compliant with ISO 7388-1 – SK, ISO 7388-2 – MAS-BT and ANSI-CAT can also be clamped
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder with clamping screw for DIN 2080 adapters

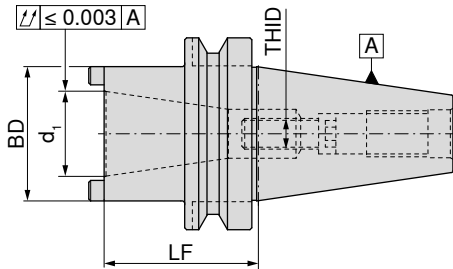

**NEW**



A  
G 6,3 n<sub>max</sub> 8000

**84 040 ...**

Adapter	d <sub>i</sub>	LF mm	BD mm	THID	
BT 40	SK 30	60	51	M12	13069
BT 40	SK 40	100	63	M16	14069
BT 50	SK 40	80	70	M16	14068

### Spare parts for Article no.

84 040 13069  
84 040 14069  
84 040 14068

Clamping screw SK	Clamping Screw	Counterscrew	Hollow key with nose	Threaded ring	clamping screw
83 950 ...	84 950 ...	83 950 ...	83 359 ...	84 950 ...	83 950 ...
	264	030	017	127	125
	009	030	133	43800	

Screw length required when pulling in ISO 7388-1 – SK,  
ISO 7388-2 – MAS BT or DIN 2080 shanks

ISO 7388-2 Suitable for article no.	Taper Shank	Clamping screw length	Clamping screw length
	Ø d <sub>i</sub>	ISO 7388-1, ISO 7388-2 THID	DIN 2080 THID
84 040 13069	SK 30 – BT 30		M12x30 – 83 950 125
84 040 14069	SK 40 – BT 40	M16x70 – 83 950 264	M16x45 – 84 950 43700
84 040 14068	SK 40 – BT 40	M16x65 – 84 950 43600	M16x40 – 83 950 009

### Accessories


Pull studs	Others
→ 110–111	→ 284

## BT/HSK-A adapter

- ▲ for mounting HSK-A adapters according to ISO 12164
- ▲ also available with Balluff chip **on request**

### Scope of supply:

with clamping cartridge and cover ring

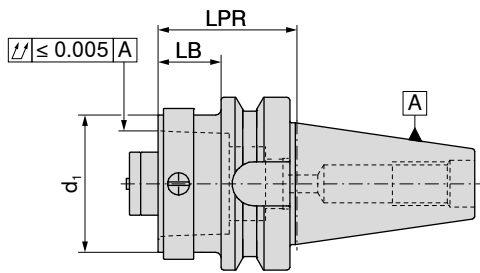

AD


84 016 ...

Adapter	d <sub>1</sub>	LB mm	LPR mm	
BT 40	HSK-A 32	13	40	04060
BT 40	HSK-A 40	13	40	04059
BT 40	HSK-A 50	23	50	04058
BT 40	HSK-A 63	43	70	04057
BT 50	HSK-A 32	12	50	05060
BT 50	HSK-A 40	12	50	05059
BT 50	HSK-A 50	22	60	05058
BT 50	HSK-A 63	22	60	05057
BT 50	HSK-A 100	52	90	05055

# BT/PSC adapter

- ▲ for mounting PSC adapters according to ISO 26623-1
- ▲ also available with Balluff chip **on request**


**Scope of supply:**  
with tightening screw

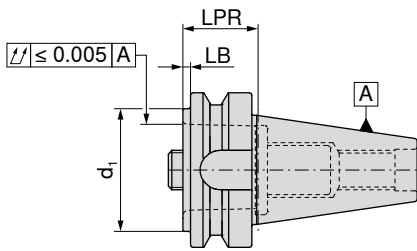

AD

**84 017 ...**

Adapter	d <sub>1</sub>	LB mm	LPR mm	
BT 40	PSC 32	3	30	<b>04087</b>
BT 40	PSC 40	3	30	<b>04095</b>
BT 40	PSC 50	3	30	<b>04094</b>
BT 40	PSC 63	58	85	<b>04093</b>
BT 50	PSC 32	2	40	<b>05087</b>
BT 50	PSC 40	2	40	<b>05095</b>
BT 50	PSC 50	2	40	<b>05094</b>
BT 50	PSC 63	2	40	<b>05093</b>
BT 50	PSC 80	32	70	<b>05086</b>



**84 950 ...**




**84 950 ...**

**Spare parts**  
d<sub>1</sub>

PSC 32	<b>127</b>	SW8	<b>122</b>
PSC 40	<b>128</b>	SW8	<b>123</b>
PSC 50	<b>129</b>	SW10	<b>124</b>
PSC 63	<b>130</b>	SW14	<b>126</b>
PSC 80	<b>130</b>	SW14	<b>126</b>

## Blank

- ▲ Material: Steel 16MnCr5
- ▲ for production of special tools
- ▲ Diameter BD turned with 0.5 mm oversize
- ▲ Taper hardened and ground
- ▲ Special tool area in soft state
- ▲ also available with Balluff chip **on request**

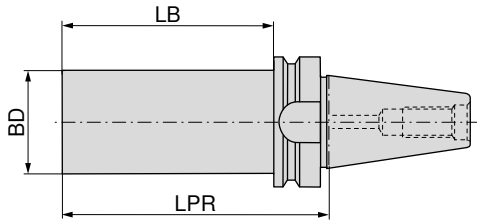

NEW



AD/B

82 747 ...

Adapter	BD mm	LPR mm	LB mm
BT 40	63,0	250	223
BT 50	63,5	300	262


16369

16368

## Test bar

- ▲ Without tool change groove
- ▲ Use for MAS BT 40 special pull studs with 3 mm shorter LF dimension, as standard

Scope of supply:  
in wooden box

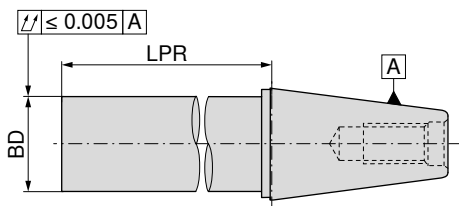

NEW



A

81 746 ...

Adapter	BD mm	LPR mm
SK / BT 40	40	320
SK / BT 50	50	320

14079

15078

### Accessories



Pull studs

Others

→ 110-111


→ 284

# ER Precision Collet chuck – Centro-P – BT-FC

- ▲ with face contact
- ▲ for standard or sealed nuts
- ▲ maximum clamping range covered according to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

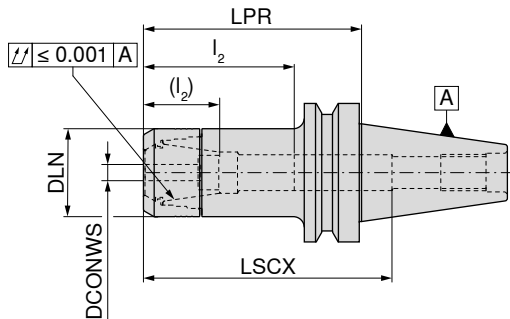

AD  
G 2,5  $n_{max}$  25000

**84 525 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	
BT-FC 30	1 - 10	75	30	97	28 - 45 (14 - 31)	426E (ER16)	002
BT-FC 30	1 - 10	90	30	105	29 - 41 (29 - 38)	426E (ER16)	00400
BT-FC 30	1 - 10	120	30	130	29 - 45 (29 - 32)	426E (ER16)	00600
BT-FC 30	2 - 16	75	40	72	38 - 56 (23 - 39)	430E (ER25)	012
BT-FC 30	2 - 20	75	50	84	42 - 62 (24 - 45)	470E (ER32)	022
BT-FC 40	1 - 10	75	30	90	38 - 53 (29 - 39)	426E (ER16)	102
BT-FC 40	1 - 10	90	30	115	38 - 53 (29 - 38)	426E (ER16)	10400
BT-FC 40	1 - 10	120	30	145	38 - 53 (29 - 38)	426E (ER16)	10600
BT-FC 40	1 - 16	90	40	84	41 - 64 (36 - 46)	430E (ER25)	11400
BT-FC 40	2 - 16	75	40	100	42 - 59 (36 - 41)	430E (ER25)	112
BT-FC 40	2 - 16	120	40	113	41 - 64 (36 - 46)	430E (ER25)	11600
BT-FC 40	2 - 20	75	50	100	42 - 76 (42 - 52)	470E (ER32)	122
BT-FC 40	2 - 20	90	50	95	41 - 72 (41 - 55)	470E (ER32)	12400
BT-FC 40	2 - 20	120	50	110	41 - 72 (41 - 55)	470E (ER32)	12600

→ Transmittable torque moments, Page 313

**i** LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

Lock nut IK	Lock nut	Stop screw 2	Stop screw 1
84 950 ...	84 950 ...	83 950 ...	83 950 ...

### Spare parts for Article no.

84 525 002	011	001	M11x1 - SW6	341	M11x1 - SW6	337
84 525 012	013	003	M18x1,5 - SW6	432	M18x1,5 - SW6	431
84 525 022	015	005	M22x1,5 - SW6	402	M22x1,5 - SW6	401
84 525 102	011	001	M11x1 - SW6	341	M11x1 - SW6	337
84 525 112	013	003	M18x1,5 - SW6	432	M18x1,5 - SW6	431
84 525 122	015	005	M22x1,5 - SW6	402	M22x1,5 - SW6	401

### Accessories



ER collet	Sealing ring	Roll key	Roll key device	Pull studs	Others
→ 268-276, 278-279	→ 280	→ 286	→ 286	→ 110-111	→ 284

# ER precision collet chuck – HDC – BT-FC

- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

### Scope of supply:

Base body including lock nut, without backstop screw

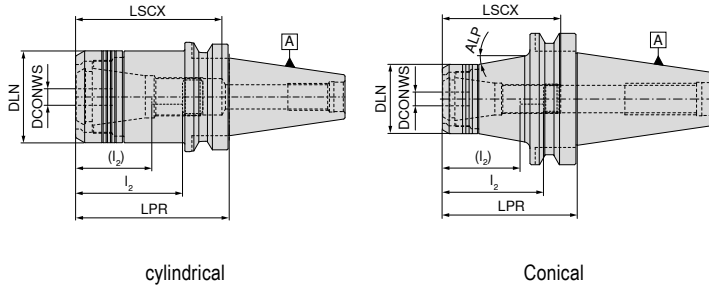

AD

G 6,3  $\rho_{max}$  18000

cylindrical

84 400 ...



AD

G 6,3  $\rho_{max}$  18000

conical

84 400 ...

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	ALP °	for collet
BT-FC 40	2 - 20	60	53	80	41 - 63 (27 - 45)		470E (ER32)
BT-FC 40	2 - 20	90	53	95	41 - 65 (27 - 47)		470E (ER32)
BT-FC 50	2 - 20	75	53	114	41 - 81 (27 - 63)	10	470E (ER32)
BT-FC 50	2 - 20	105	53	144	41 - 81 (27 - 63)	10	470E (ER32)

12064

22064

12063

22063

→ Transmittable torque moments, Page 313






LSCX = Clamping depth without backstop screw

$l_2$  = Clamping depth backstop screw 1, dimension in brackets ( $l_2$ ) = Clamping depth backstop screw 2

### Spare parts

#### DCONWS

2 - 20

		
Lock nut	Stop screw 2	Stop screw 1
84 950 ...	83 950 ...	83 950 ...
30100	402	401


### Accessories

				
ER collet	Roll key	Roll key device	Pull studs	Others
→ 268-276, 278-279	→ 286	→ 286	→ 110-111	→ 284

# Shrink fit adapters 4.5° – BT-FC

- ▲ with face contact
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

TG

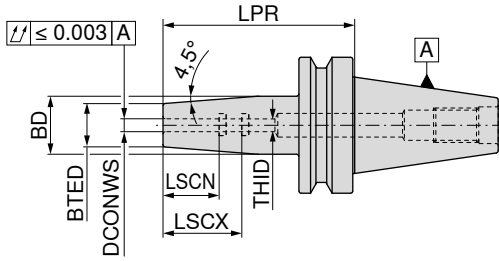


AD  
G 2,5  $\rho_{max}$  25000



AD/B  
G 2,5  $\rho_{max}$  25000

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	84 325 ...	
		mm	mm	mm	mm	mm	mm			
short	BT-FC 30	3	85	10	17	28	12	M6	003	
	BT-FC 30	4	85	15	22	28	16	M6	004	
	BT-FC 30	5	85	15	22	30	20	M6	005	
	BT-FC 30	6	85	21	27	36	26	M5	006	
	BT-FC 30	8	85	21	27	36	26	M6	008	
	BT-FC 30	10	85	24	32	41	31	M8x1	010	
	BT-FC 30	12	85	24	32	47	37	M10x1	012	
	BT-FC 30	16	85	27	34	50	40	M12x1	016	
	BT-FC 30	20	85	33	42	52	42	M16x1	020	
	BT-FC 40	3	90	10	17	28	12	M6		103
	BT-FC 40	4	90	15	22	28	16	M6		104
	BT-FC 40	5	90	15	22	30	20	M6		105
	BT-FC 40	6	90	21	27	36	26	M5		106
	BT-FC 40	8	90	21	27	36	26	M6		108
	BT-FC 40	10	90	24	32	41	31	M8x1		110
	BT-FC 40	12	90	24	32	47	37	M10x1		112
	BT-FC 40	16	90	27	34	50	40	M12x1		116
	BT-FC 40	20	90	33	42	52	42	M16x1		120
BT-FC 40	25	100	44	53	58	48	M16x1		125	

→ Min. clamping depth, Page 312



Stop screw IK



Stop screw IK

## Spare parts

DCONWS	83 950 ...		83 950 ...	
3 - 5				
6	M6x14 - SW2	417	M5x12,5 - SW2,5	418
8			M6x12,5 - SW3	419
10			M8x1x13,5 - SW3	420
12			M10x1x13,5 - SW5	421
16			M12x1x13,5 - SW5	422
20 - 25			M16x1x13,5 - SW8	424

## Accessories


Shrink fit extension	Pull studs	Others
→ 247	→ 110-111	→ 284

# HyPower – Complus

- ▲ High pressure chuck, short and stable version – BT-FC
- ▲ with face contact
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

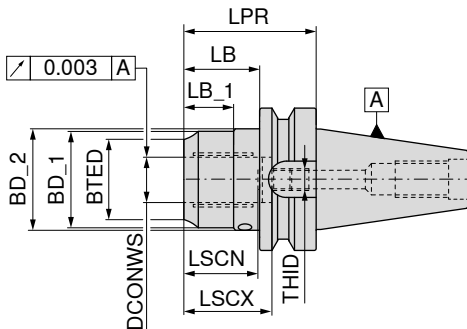

AD  
G 2,5 n<sub>max</sub> 25000

**83 527 ...**

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	BD_2 mm	LB mm	LB_1 mm	LSCX mm	LSCN mm	THID	
BT-FC 40	20	72,5	38					51	40	M16x1x13,5	120
BT-FC 40	32	90,0	54	63	62	64,0	48	61	51	M16x1x13,5	13274
BT-FC 50	20	83,5	38	49		47,0		51	41	M16x1x13,5	12073
BT-FC 50	32	90,0	57	68	72	53,5	35	61	51	M16x1x13,5	13273

→ Min. clamping depth, Page 312




Clamping key – T

**80 397 ...**



Pressure screw

**83 950 ...**



Stop screw IK

**83 950 ...**

### Spare parts for Article no.

83 527 120	SW5	<b>050</b>	M10x1x10	<b>158</b>	M8x1x13,5 - SW3	<b>420</b>
83 527 13274	SW5	<b>050</b>	M10x1x14	<b>429</b>	M16x1x13,5 - SW8	<b>424</b>
83 527 12073	SW5	<b>050</b>	M10x1x14	<b>429</b>	M16x1x13,5 - SW8	<b>424</b>
83 527 13273	SW5	<b>050</b>	M10x1x14	<b>429</b>	M16x1x13,5 - SW8	<b>424</b>


### Accessories

Reduction sleeve	Pull studs	Others
→ 282	→ 110-111	→ 284



# Cylindrical shank adapter (Weldon) – BT-FC

- ▲ with face contact
- ▲ for shanks according to DIN 6535 / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

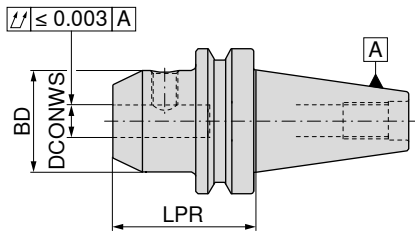

AD  
G 2,5 n<sub>max</sub> 25000

**84 552 ...**

	Adapter	DCONWS <sub>H4</sub> mm	LPR mm	BD mm	
short	BT-FC 30	6	50	25	<b>006</b>
	BT-FC 30	8	50	28	<b>008</b>
	BT-FC 30	10	50	35	<b>010</b>
	BT-FC 30	12	50	42	<b>012</b>
	BT-FC 30	16	63	48	<b>016</b>
	BT-FC 30	20	63	52	<b>020</b>
	BT-FC 40	6	50	25	<b>106</b>
	BT-FC 40	8	50	28	<b>108</b>
	BT-FC 40	10	63	35	<b>110</b>
	BT-FC 40	12	63	42	<b>112</b>
	BT-FC 40	16	63	48	<b>116</b>
	BT-FC 40	20	63	52	<b>120</b>
	BT-FC 40	25	90	65	<b>125</b> <sup>1)</sup>
	BT-FC 40	32	100	72	<b>132</b> <sup>1)</sup>
	BT-FC 50	6	63	25	<b>306</b>
	BT-FC 50	8	63	28	<b>308</b>
	BT-FC 50	10	63	35	<b>310</b>
	BT-FC 50	12	80	42	<b>312</b>
	BT-FC 50	16	80	48	<b>316</b>
	BT-FC 50	20	80	52	<b>320</b>
	BT-FC 50	25	100	65	<b>325</b> <sup>1)</sup>
	BT-FC 50	32	105	72	<b>332</b> <sup>1)</sup>

1) Version with two grub screws



Grubscrew

**62 950 ...**

### Spare parts

#### DCONWS

6	M6x10	<b>006</b>
8	M8x10	<b>008</b>
10	M10x12	<b>010</b>
12	M12x16	<b>012</b>
16	M14x16	<b>016</b>
20	M16x16	<b>020</b>
25	M18x2x20	<b>025</b>
32	M20x2x20	<b>032</b>

### Accessories



Pull studs	Others
→ 110–111	→ 284

# ER Collet chuck – BT-FC

- ▲ with face contact
- ▲ also available with Balluff chip on request

### Scope of supply:

Toolholder including nut

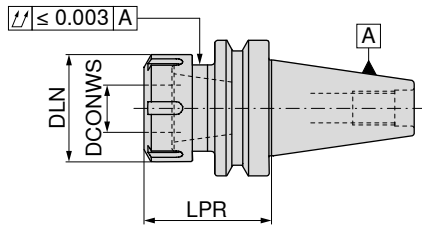

AD  
G 2,5 n<sub>max</sub> 20000

**84 557 ...**

	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	
short	BT-FC 30	1 - 10	63	28	56	426E (ER16)	010 <sup>1)</sup>
	BT-FC 30	1 - 16	60	42	104	430E (ER25)	016
	BT-FC 30	2 - 20	60	50	136	470E (ER32)	020
	BT-FC 40	1 - 10	63	28	56	426E (ER16)	110 <sup>1)</sup>
	BT-FC 40	1 - 16	60	42	104	430E (ER25)	116
	BT-FC 40	2 - 20	60	50	136	470E (ER32)	120
	BT-FC 50	1 - 16	70	42	104	430E (ER25)	316
	BT-FC 50	2 - 20	70	50	136	470E (ER32)	320
	medium length	BT-FC 50	1 - 10	100	28	56	426E (ER16)

1) with 6 position lock nut

Spare parts for collet	Lock nut	62 950 ...	Lock nut IK	83 950 ...	Lock nut	62 950 ...	Y clamping key	83 357 ...
426E (ER16) / BT30-BT50	M22x1,5 - SW25							
430E (ER25) / BT30-BT50								
470E (ER32) / BT30-BT50								

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts


### Accessories

ER collet	Pull studs	Others
→ 268-276, 278-279	→ 110-111	→ 284

# Adapter with ABS Connection – BT-FC

▲ with face contact


▲ also available with Balluff chip on request

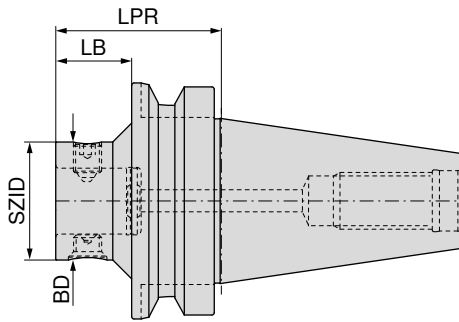


AD

**84 264 ...**

Adapter	SZID	BD mm	LPR mm	LB mm	
BT-FC 40	ABS 50	50	60	33	<b>05064</b>
BT-FC 40	ABS 63	63	70		<b>06364</b>
BT-FC 50	ABS 50	50	70	32	<b>05063</b>
BT-FC 50	ABS 63	63	80	42	<b>06363</b>
BT-FC 50	ABS 80	80	100	62	<b>08063</b>
BT-FC 50	ABS 100	100	110		<b>10063</b>



**84 950 ...**




**84 950 ...**

**Spare parts**

SZID		
ABS 50	<b>20300</b>	<b>20400</b>
ABS 63	<b>25500</b>	<b>27300</b>
ABS 80	<b>25600</b>	<b>25100</b>
ABS 100	<b>25700</b>	<b>25200</b>

# Shell mill adapter – BT-FC

- ▲ with face contact
- ▲ with fixed drive dogs and enlarged contact face for milling cutters with transverse slot
- ▲ also available with Balluff chip **on request**

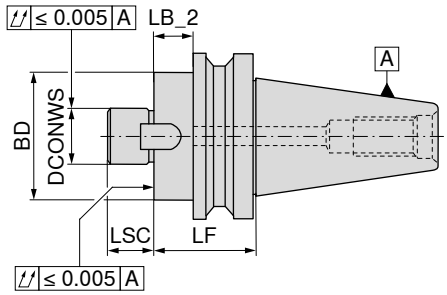

AD  
G 6,3 n<sub>max</sub> 15000

**84 562 ...**

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	LSC mm	
short	BT-FC 30	16	18	39,0	40	17	<b>016</b>
	BT-FC 30	22	18	39,0	50	19	<b>022</b>
	BT-FC 30	27	18	39,0	60	21	<b>027</b>
	BT-FC 30	32	28	49,0	80	24	<b>032</b>
	BT-FC 40	16	8	34,0	40	17	<b>116</b>
	BT-FC 40	22	8	34,0	50	19	<b>122</b>
	BT-FC 40	27	8	34,0	60	21	<b>127</b>
	BT-FC 40	32	23	49,0	80	24	<b>132</b>
	BT-FC 40	40	23	49,0	89	27	<b>140</b>
	BT-FC 50	22	12	48,5	50	19	<b>322</b>
	BT-FC 50	27	12	48,5	60	21	<b>327</b>
	BT-FC 50	32	12	48,5	80	24	<b>332</b>
	BT-FC 50	40	17	53,5	89	27	<b>340</b>



Screw for drivers

**84 950 ...**



Driver

**84 950 ...**



clamping screw

**83 950 ...**

**Spare parts**  
**DCONWS**

16	M3x12	<b>162</b>	8x9x11	<b>157</b>	M8x25	<b>113</b>
22	M4x10	<b>163</b>	10x11,2x13	<b>158</b>	M10x25	<b>124</b>
27	M4x16	<b>164</b>	12x12,6x15	<b>159</b>	M12x30	<b>125</b>
32	M5x16	<b>165</b>	14x14x22,5	<b>160</b>	M16x35	<b>126</b>
40	M5x16	<b>166</b>	16x16x23	<b>161</b>	M20x40 - SW17	<b>112</b>

*Accessories*




Pull studs	Others
→ <b>110-111</b>	→ <b>284</b>

## Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 15° Form A

Scope of supply:  
including O-Ring



83 532 ...



Adapter	BD_1	BD_2	BD_3	BD_4	CRKS	OAL	LF	LB_1	LB_2	CND	DRVS	TQX
	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	Nm
BT 40	19	14	23	17	M16	54	29	23	5	5	19	50

040

## Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 30° Form A and B

Scope of supply:  
including O-Ring



82 533 ...

82 531 ...

Adapter	BD_1	BD_2	BD_3	BD_4	CRKS	OAL	LF	LB_1	LB_2	CND	DRVS	TQX	form
	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	Nm	
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0	2,2	13	20	A
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5	4,0	19	50	A
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0	6,0	30	150	A
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0		13	20	B
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5		19	50	B
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0		30	150	B

030

040

050

030

040

050



83 476 ...

Spare parts

BD\_4


17	BT / SK 40	040
25	BT / SK 50	050

## Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 45° Form A and B

### Scope of supply:

including O-Ring

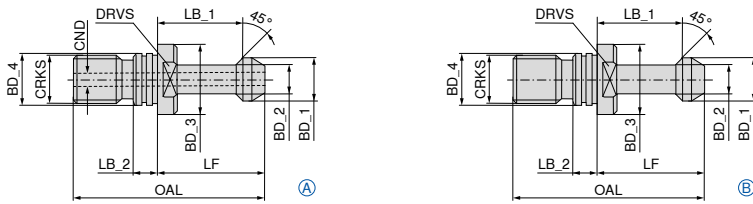


Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND	DRVS mm	TQX Nm	form	82 530 ...		82 534 ...	
														030	040	050	050
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0	2,2	13	20	A				030
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5	4,0	19	50	A				040
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0	6,0	30	150	A				050
BT 30	11	7	16,5	12,5	M12	43	23	18	4,0		13	20	B		030		
BT 40	15	10	23,0	17,0	M16	60	35	28	5,5		19	50	B		040		
BT 50	23	17	38,0	25,0	M24	85	45	35	8,0		30	150	B		050		

## Pull stud for tool holders according to ISO 7388-2

▲ MAS-BT 90° Form A and B

### Scope of supply:

including O-Ring

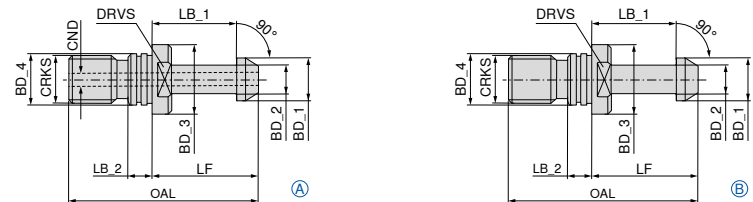


Adapter	BD_1 mm	BD_2 mm	BD_3 mm	BD_4 mm	CRKS	OAL mm	LF mm	LB_1 mm	LB_2 mm	CND	DRVS mm	TQX Nm	form	82 536 ...		82 537 ...	
														040	050	040	050
BT 40	15	10	23	17	M16	60	35	28	5,5	4	19	50	A				040
BT 50	23	17	38	25	M24	85	45	35	8,0	6	30	150	A				050
BT 40	15	10	23	17	M16	60	35	28	5,5		19	50	B		040		
BT 50	23	17	38	25	M24	85	45	35	8,0		30	150	B		050		

# ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Holder **without nut, without backstop**

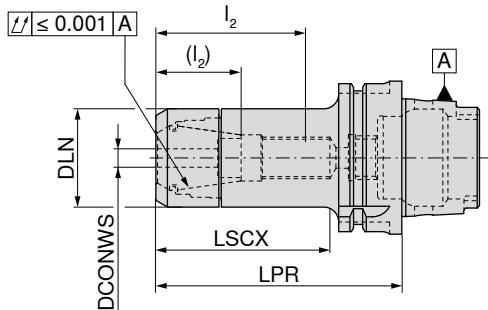

G 2,5  $n_{max}$  25000

**84 722 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	
HSK-A 40	1 - 10	60	30	40	32 - 54	426E (ER16)	401
HSK-A 40	2 - 16	60	40	40		430E (ER25)	404 <sup>1)</sup>
HSK-A 40	2 - 20	61	50	45		470E (ER32)	407 <sup>1)</sup>
HSK-A 50	2 - 16	70	40	49	34 - 35	430E (ER25)	505
HSK-A 50	2 - 16	60	40	37		430E (ER25)	504 <sup>1)</sup>
HSK-A 63	1 - 10	55	30	32		426E (ER16)	609 <sup>1)</sup>
HSK-A 63	1 - 10	100	30	71	28 - 45 (16 - 31)	426E (ER16)	610
HSK-A 63	1 - 10	160	30	106	28 - 45 (16 - 31)	426E (ER16)	611
HSK-A 63	1 - 10	200	30	136	28 - 45 (16 - 31)	426E (ER16)	612
HSK-A 63	1 - 10	130	30	87	26 - 50 (17 - 38)	426E (ER16)	613
HSK-A 63	2 - 16	60	40	37		430E (ER25)	615
HSK-A 63	2 - 16	100	40	70	35 - 55 (24 - 37)	430E (ER25)	616
HSK-A 63	2 - 16	160	40	128	35 - 60 (24 - 42)	430E (ER25)	617
HSK-A 63	2 - 16	130	40	89	37 - 60 (12 - 42)	430E (ER25)	619
HSK-A 63	2 - 20	70	50	46		470E (ER32)	620
HSK-A 63	2 - 20	100	50	71	41 - 57 (26 - 39)	470E (ER32)	621
HSK-A 63	2 - 20	160	50	129	52 - 70 (26 - 60)	470E (ER32)	622
HSK-A 63	2 - 20	130	50	101	42 - 69 (18 - 41)	470E (ER32)	625
HSK-A 63	3 - 26	120	63	91		472E (ER40)	62700
HSK-A 63	3 - 26	80	63	56		472E (ER40)	626 <sup>2)</sup>
HSK-A 100	1 - 10	130	30	101	28 - 48 (16 - 35)	426E (ER16)	11200
HSK-A 100	1 - 10	100	30	70	28 - 48 (16 - 35)	426E (ER16)	110
HSK-A 100	1 - 10	160	30	130	28 - 48 (16 - 35)	426E (ER16)	111
HSK-A 100	1 - 16	100	40	98	40 - 60 (22 - 42)	430E (ER25)	11800
HSK-A 100	2 - 16	160	40	105	38 - 68 (20 - 50)	430E (ER25)	117
HSK-A 100	2 - 16	100	40	71	38 - 56 (20 - 40)	430E (ER25)	116
HSK-A 100	2 - 20	160	50	99	42 - 70 (24 - 52)	470E (ER32)	122
HSK-A 100	2 - 20	100	50	70	42 - 59 (24 - 40)	470E (ER32)	121
HSK-A 100	2 - 20	130	50	97	44 - 69 (41 - 51)	470E (ER32)	12400

1) Item cannot be combined with backstop screw

2) Non standard groove before tool change collar not according to DIN, not suitable for automatic tool change

→ Transmittable torque moments, Page 313

LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

# Spare parts ER precision collet chuck – Centro-P


Spare parts for collet	84 950 ...		83 950 ...	
	Lock nut IK	Lock nut	Stop screw 2	Stop screw 1
426E (ER16)	011	001		
426E (ER16)	011	001	M11x1 - SW6	337
430E (ER25)	013	003	M18x1,5 - SW6	431
470E (ER32)	015	005	M22x1,5 - SW6	401
472E (ER40)	017	007	M28x1,5 - SW6	400

## ER Precision tapered collet chuck – Centro-P

- ▲ for special tapered nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip on request

### Scope of supply:

Holder **without** nut, **without** backstop

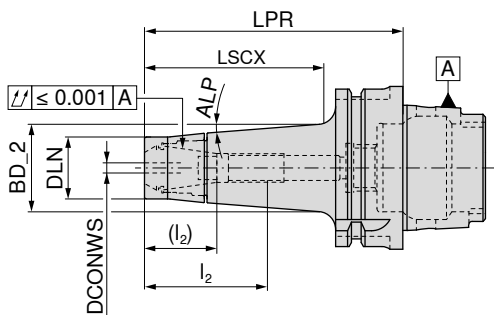

G 2,5  $n_{max}$  25000

Adapter	DCONWS	LPR	DLN	BD_2	LSCX	$l_2$ ( $l_2$ )	ALP	for collet	84 721 ...
HSK-A 40	1 - 10	100	24	30,8	67	26 - 47 (12 - 32)	2,0°	426E (ER16)	310
HSK-A 50	1 - 10	65	24	28,9	44	26 - 32	4,5°	426E (ER16)	710
HSK-A 50	1 - 10	100	24	34,4	77	26 - 47 (12 - 32)	4,5°	426E (ER16)	810
HSK-A 63	1 - 10	130	24	36,0	77	28 - 48 (20 - 35)	3,5°	426E (ER16)	61200
HSK-A 63	1 - 10	100	24	33,8	74	28 - 48 (20 - 35)	4,5°	426E (ER16)	610
HSK-A 63	1 - 10	160	24	36,0	106	28 - 48 (20 - 35)	2,5°	426E (ER16)	611

→ Transmittable torque moments, Page 313

**i** LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

### Spare parts for collet

426E (ER16)

84 950 ...	84 950 ...	83 950 ...	83 950 ...
Tapered lock nut IK	Tapered lock nut	Stop screw 2	Stop screw 1
033	031	341	337




# ER Precision collet chuck, slim version – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max}$  80 bar
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Holder **without nut, without backstop**

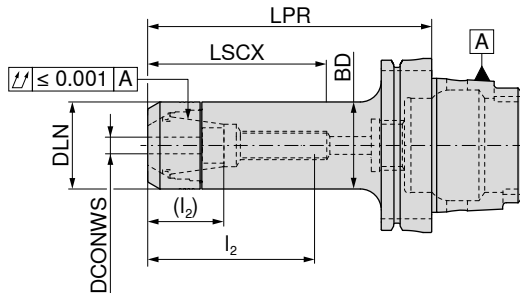

G 2,5 n<sub>max</sub> 25000

**84 719 ...**

Adapter	DCONWS mm	LPR mm	BD mm	DLN mm	LSCX mm	l <sub>2</sub> (l <sub>2</sub> ) mm	for collet	
HSK-A 50	1 - 7	130	16	16	60	15 - 32 (7 - 22)	4008E (ER11)	<b>407</b>
HSK-A 63	1 - 7	70	16	16	48	15 - 32 (7 - 22)	4008E (ER11)	<b>507</b>
HSK-A 63	1 - 7	100	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	<b>607</b>
HSK-A 63	1 - 7	130	16	16	108	15 - 32 (7 - 22)	4008E (ER11)	<b>707</b>
HSK-A 63	1 - 7	160	16	16	68	18 - 36 (12 - 26)	4008E (ER11)	<b>608</b>
HSK-A 63	1 - 10	70	22	22	46	27 - 34 (14 - 20)	426E (ER16)	<b>610</b>
HSK-A 63	1 - 10	100	22	22	62	27 - 44 (14 - 30)	426E (ER16)	<b>710</b>
HSK-A 63	1 - 10	130	22	22	87	27 - 52 (14 - 38)	426E (ER16)	<b>810</b>
HSK-A 63	1 - 10	160	22	22	97	27 - 52 (14 - 38)	426E (ER16)	<b>910</b>

→ Transmittable torque moments, Page 313

**i** LSCX = Clamping depth without back stop screw for shanks  
 l<sub>2</sub> = With back stop screw 1, Dimension in brackets (l<sub>2</sub>) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK	Mini lock nut	Stop screw 2	Stop screw 1
4008E (ER11)	<b>84 950 ...</b>	<b>84 950 ...</b>	<b>83 950 ...</b>	<b>83 950 ...</b>
426E (ER16)	<b>035</b>	<b>041</b>	<b>340</b>	<b>336</b>
		<b>034</b>	<b>341</b>	<b>337</b>
		M8x1 - SW4		M8x1 - SW4
		M11x1 - SW6		M11x1 - SW6

**Accessories**


ER collet	Sealing ring	Device	Roll key	Roll key device	Coolant transfer pipe	Others
→ 268-276, 279	→ 280	→ 285	→ 286	→ 286	→ 156	→ 284

# ER precision collet chuck – HDC


- ▲ HDC = Heavy Duty Chuck, an adapter specially designed for rough machining
- ▲ For heavy duty lock nut
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body **including** lock nut, **without** backstop screw



cylindrical



Conical



G 6,3  $n_{max}$  18000

G 6,3  $n_{max}$  18000

cylindrical

conical

**84 400 ...**

**84 400 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	ALP °	for collet		
HSK-A 63	2 - 20	70	53	45	41 - 57 (27 - 39)		470E (ER32)		12057
HSK-A 63	2 - 20	100	53	72	41 - 57 (27 - 39)		470E (ER32)		22057
HSK-A 100	2 - 20	100	53	68	41 - 54 (27 - 36)	10	470E (ER32)		22055

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without backstop screw

$l_2$  = Clamping depth backstop screw 1, dimension in brackets ( $l_2$ ) = Clamping depth backstop screw 2

Lock nut	Stop screw 2	Stop screw 1
<b>84 950 ...</b>	<b>83 950 ...</b>	<b>83 950 ...</b>
30100	M22x1,5 - SW6	402
		M22x1,5 - SW6
		401

### Spare parts

#### DCONWS

2 - 20

### Accessories


ER collet	Roll key	Roll key device	Others
→ 268-276, 278-279	→ 286	→ 286	→ 284

# HyPower – Rough

- ▲ High pressure chuck – especially for milling
- ▲ Ideal for HSC and HPC applications
- ▲ High temperature resistance
- ▲ Also available with Balluff chip on request

### Scope of supply:

Base body with backstop screw and pressure screw

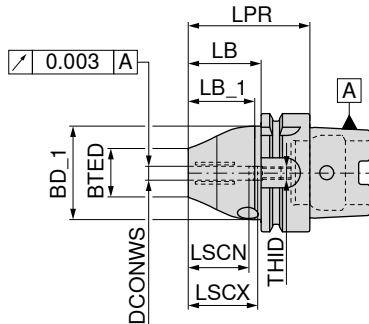

AD  
G 2,5 n<sub>max</sub> 25000

84 254 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	
HSK-A 63	6	65	26	50,0	35,2	39	37	27	M5	10657
HSK-A 63	8	65	28	50,0	35,2	39	37	27	M6	10857
HSK-A 63	10	75	30	50,0	45,2	49	41	31	M8x1	11057
HSK-A 63	12	75	32	52,5	45,2	49	46	36	M8x1	11257
HSK-A 63	16	79	38	52,5	49,2	53	49	39	M8x1	11657
HSK-A 63	20	79	38	52,5	49,2	53	51	41	M8x1	12057
HSK-A 100	6	73	26	50,0	40,2	44	37	27	M5	10655
HSK-A 100	8	73	28	50,0	40,2	44	37	27	M6	10855
HSK-A 100	10	83	30	50,0	50,2	54	41	31	M8x1	11055
HSK-A 100	12	83	32	52,5	50,2	54	46	36	M8x1	11255
HSK-A 100	16	87	38	52,5	54,2	58	49	39	M8x1	11655
HSK-A 100	20	87	38	52,5	54,2	58	51	41	M8x1	12055


→ Min. clamping depth, Page 312



Clamping key – T



Pressure screw



Stop screw IK

80 397 ...

83 950 ...

83 950 ...

### Spare parts

DCONWS					
6	SW5	050	M10x12	55000	M5x12,5 - SW2,5 418
8	SW5	050	M10x12	55000	M6x12,5 - SW3 419
10	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
12	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
16	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420
20	SW5	050	M10x12	55000	M8x1x13,5 - SW3 420

### Accessories


Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 156	→ 284

# HyPower – Complus

- ▲ High pressure chuck, short and stable version
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

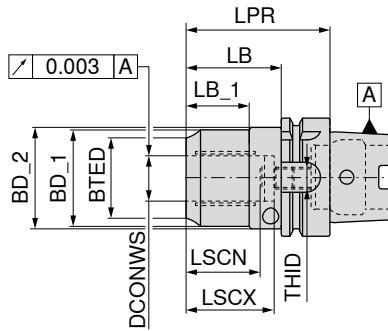

**NEW**



AD  
G 2,5 n<sub>max</sub> 25000

**83 722 ...**

Adapter	DCONWS	LPR	BTED	BD_1	BD_2	LB_1	LB	LSCX	LSCN	THID	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
HSK-A 63	20	80	36	49	52,5	36	54	51	40	M8x1	<b>120</b>
HSK-A 63	32	105	54	63	52,5	55	79	61	51	M16x1	<b>13257</b>
HSK-A 100	20	85	38	49	52,5	36	56	51	41	M8x1	<b>12055</b>
HSK-A 100	32	100	57	68	72,0	42	71	61	51	M8x1	<b>13255</b>


→ Min. clamping depth, Page 312



Clamping key - T



Pressure screw



Stop screw IK

**80 397 ...**

**83 950 ...**

**83 950 ...**

### Spare parts for Article no.

83 722 120	SW5	<b>050</b>	M10x1x10	<b>158</b>	M8x1x13,5 - SW3	<b>420</b>
83 722 13257	SW5	<b>050</b>	M10x1x10	<b>158</b>	M16x1x13,5 - SW8	<b>424</b>
83 722 12055	SW5	<b>050</b>	M10x1x10	<b>158</b>	M8x1x13,5 - SW3	<b>420</b>
83 722 13255	SW5	<b>050</b>	M10x1x10	<b>158</b>	M8x1x13,5 - SW3	<b>420</b>

### Accessories


Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 156	→ 284

# HyPower – Access 3°

- ▲ High pressure chuck, slim 3°
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

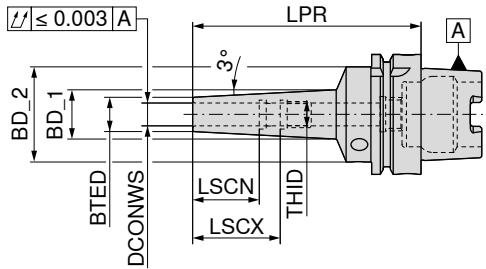

G 2,5 n<sub>max</sub> 25000

**83 727 ...**

	Adapter	DCONWS	LPR	BTED	BD_1	BD_2	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm	mm	mm	
medium length	HSK-A 63	3	120	9	16,65	50	28	12	M3	603
	HSK-A 63	4	120	10	17,65	50	28	16	M3	604
	HSK-A 63	5	120	11	18,65	50	28	20	M3	605
	HSK-A 63	6	120	12	19,75	50	37	27	M5	606
	HSK-A 63	8	120	14	21,75	50	37	27	M6	608
	HSK-A 63	10	120	16	23,75	50	41	31	M8x1	610
	HSK-A 63	12	120	18	25,86	50	46	36	M10x1	612
	HSK-A 63	16	120	24	31,50	50	49	39	M12x1	616
	HSK-A 63	20	120	28	35,55	50	51	41	M16x1	620
extra-long	HSK-A 63	6	160	16	33,53	50	37	27	M5	706
	HSK-A 63	8	160	18	34,55	50	37	27	M6	708
	HSK-A 63	10	160	20	36,27	50	41	31	M8x1	710
	HSK-A 63	12	160	22	37,78	50	46	36	M10x1	712
extra long	HSK-A 63	6	200	16	37,83	50	37	27	M5	806
	HSK-A 63	8	200	18	38,85	50	37	27	M6	808
	HSK-A 63	10	200	20	40,57	50	41	31	M8x1	810
	HSK-A 63	12	200	22	42,07	50	46	36	M10x1	812


→ Min. clamping depth, Page 312



Clamping key – T



Pressure screw



Stop screw IK

**80 397 ...**

**83 950 ...**

**83 950 ...**

### Spare parts

#### DCONWS


3	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
4	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
5	SW5	050	M10x1x10	158	M3x20 - SW1,5	172
6	SW5	050	M10x1x10	158	M5x12,5 - SW2,5	418
6	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
8	SW5	050	M10x1x10	158	M6x12,5 - SW3	419
10	SW5	050	M10x1x12	159	M8x1x13,5 - SW3	420
12	SW5	050	M10x1x12	159	M10x1x13,5 - SW5	421
16	SW5	050	M10x1x12	159	M12x1x13,5 - SW5	422
20	SW5	050	M10x1x12	159	M16x1x13,5 - SW8	424

# HyPower – Access 4.5°

- ▲ High pressure chuck with slim contour, original dimensions of a 4.5° shrink contour
- ▲ Especially for reaming and drilling applications
- ▲ Ideal for tool and die production
- ▲ Also available with Balluff chip on request

### Scope of supply:

Base body with backstop screw and pressure screw

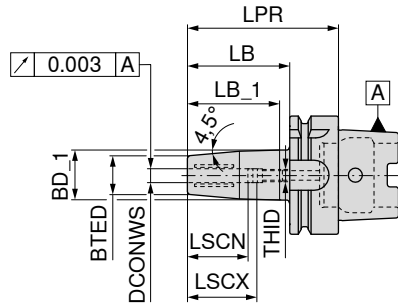

NEW



AD

G 2,5 n<sub>max</sub> 25000


84 255 ...

Adapter	DCONWS mm	LPR mm	BTED mm	BD_1 mm	LB_1 mm	LB mm	LSCX mm	LSCN mm	THID	
HSK-A 63	6	80	21	27	48,9	54	37	27	M5	10657
HSK-A 63	8	80	21	27	48,9	54	37	27	M6	10857
HSK-A 63	10	85	24	32	53,7	59	41	31	M8x1	11057
HSK-A 63	12	90	24	32	58,6	64	46	36	M10x1	11257
HSK-A 63	16	95	27	34	63,1	69	49	39	M12x1	11657
HSK-A 63	20	100	33	42	68,9	74	51	41	M16x1	12057
HSK-A 100	6	85	21	27	38,7	56	37	27	M5	10655
HSK-A 100	8	85	21	27	38,7	56	37	27	M6	10855
HSK-A 100	10	90	24	32	53,7	61	41	31	M8x1	11055
HSK-A 100	12	95	24	32	58,6	66	46	36	M10x1	11255
HSK-A 100	16	100	27	34	63,1	71	49	39	M12x1	11655
HSK-A 100	20	105	33	42	68,9	76	51	41	M16x1	12055


→ Min. clamping depth, Page 312



Clamping key – T



Pressure screw



Stop screw IK

80 397 ...

83 950 ...

83 950 ...

### Spare parts for Article no.

84 255 10657	SW5	050	M10x10	55100	M5x12,5 - SW2,5	418
84 255 10857	SW5	050	M10x10	55100	M6x12,5 - SW3	419
84 255 11057	SW5	050	M10x10	55100	M8x1x13,5 - SW3	420
84 255 11257	SW5	050	M10x10	55100	M10x1x13,5 - SW5	421
84 255 11657	SW5	050	M10x10	55100	M12x1x13,5 - SW5	422
84 255 12057	SW5	050	M10x10	55100	M16x1x13,5 - SW5	423
84 255 10655	SW5	050	M10x10	55100	M5x12,5 - SW2,5	418
84 255 10855	SW5	050	M10x12	55000	M6x12,5 - SW3	419
84 255 11055	SW5	050	M10x12	55000	M8x1x13,5 - SW3	420
84 255 11255	SW5	050	M10x12	55000	M10x1x13,5 - SW5	421
84 255 11655	SW5	050	M10x12	55000	M12x1x13,5 - SW5	422
84 255 12055	SW5	050	M10x12	55000	M16x1x13,5 - SW5	423

### Accessories


Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 156	→ 284

# HyTens – Fit

- ▲ Hydraulic chuck, short and slim version
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

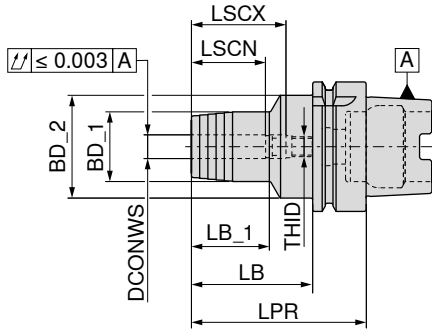

G 2,5 n<sub>max</sub> 25000

**83 726 ...**

Adapter	DCONWS	LPR	BD_1	BD_2	LB_1	LB	LSCX	LSCN	THID		
	mm	mm	mm	mm	mm	mm	mm	mm			
short	HSK-A 63	6	70	26	49,5	24	44	37	27	M5	606
	HSK-A 63	8	70	28	49,5	24	44	37	27	M6	608
	HSK-A 63	10	80	30	49,5	32	54	41	31	M8x1	610
	HSK-A 63	12	85	32	49,5	40	59	46	36	M10x1	612
	HSK-A 63	16	90	38	49,5	46	64	49	39	M12x1	616
	HSK-A 63	20	90	42	49,5	48	64	51	41	M16x1	620
	HSK-A 63	25	120	57	52,0	63	94	57	47	M16x1	625
	HSK-A 63	32	125	63	53,0	61	99	61	51	M16x1	632
	HSK-A 100	6	75	26	50,0	26	46	37	27	M5	10655
	HSK-A 100	8	75	28	50,0	26	46	37	27	M6	10855
	HSK-A 100	10	90	30	50,0	42	61	41	31	M8x1	11055
	HSK-A 100	12	95	32	50,0	47	66	46	36	M10x1	11255
	HSK-A 100	16	100	38	50,0	53	71	49	39	M12x1	11655
	HSK-A 100	20	105	42	50,0	59	76	51	41	M16x1	12055
HSK-A 100	25	110	57	63,0	62	81	57	47	M16x1	12555	
HSK-A 100	32	110	63	67,0	62	81	61	51	M16x1	13255	

→ Min. clamping depth, Page 312

## Version for MMS hydraulic chuck – 1 and 2-channel



**83 432** HSK-63 1-channel



This article can be found in our online shop at [cuttingtools.ceratizit.com](http://cuttingtools.ceratizit.com)

**83 432** HSK-100 1-channel



**83 433** HSK-63 2-channel




This article can be found in our online shop at [cuttingtools.ceratizit.com](http://cuttingtools.ceratizit.com)

**83 433** HSK-100 2-channel

## Spare parts HyTens – Fit



Pressure screw



Stop screw IK

Spare parts for Article no.		83 950 ...	
		83 950 ...	83 950 ...
83 726 606	M10x1x12	440	M5x12,5 - SW2,5 418
83 726 608	M10x1x12	440	M6x12,5 - SW3 419
83 726 610	M10x1x12	440	M8x1x13,5 - SW3 420
83 726 612	M10x1x12	440	M10x1x13,5 - SW5 421
83 726 616	M10x1x12	440	M12x1x13,5 - SW5 422
83 726 620	M10x1x12	440	M16x1x13,5 - SW5 423
83 726 625	M10x1x12	440	M16x1x13,5 - SW5 423
83 726 632	M10x1x12	440	M16x1x13,5 - SW5 423
83 726 10655	M10x1x12	440	M5x12,5 - SW2,5 418
83 726 10855	M10x1x12	440	M6x12,5 - SW3 419
83 726 11055	M10x1x12	440	M8x1x13,5 - SW3 420
83 726 11255	M10x1x12	440	M10x1x13,5 - SW5 421
83 726 11655	M10x1x12	440	M12x1x13,5 - SW5 422
83 726 12055	M10x1x12	440	M16x1x13,5 - SW8 424
83 726 12555	M10x1x12	440	M16x1x13,5 - SW8 424
83 726 13255	M10x1x12	440	M16x1x13,5 - SW8 424

### Accessories

		
Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 156	→ 284




# HyTens – Compact

- ▲ Hydraulic chuck, short and stable version
- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

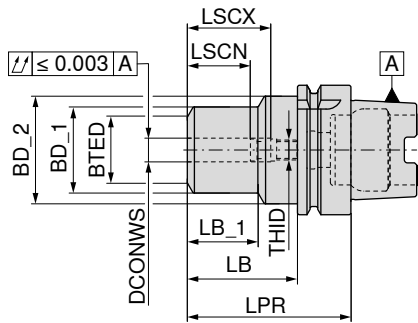

G 2,5 n<sub>max</sub> 25000

**83 430 ...**

Adapter	DCONWS	LPR	BD_1	BD_2	BTED	LB	LB_1	LSCN	LSCX	THID	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
HSK-A 63	12	80	42	52,5	32	54	34	36	46	M8x1	<b>01257</b>
HSK-A 63	20	80	49	52,5	38	54	36	41	51	M8x1	<b>02057</b>
HSK-A 100	12	85	42	52,5	32	51	34	36	46	M8x1	<b>01255</b>
HSK-A 100	20	85	49	52,5	38	51	36	41	51	M8x1	<b>02055</b>


→ Min. clamping depth, Page 312



Clamping key – T



Pressure screw



Stop screw IK

**80 397 ...**

**83 950 ...**

**83 950 ...**

### Spare parts

DCONWS	SW5	<b>050</b>	M10x1x12	<b>440</b>	M8x1x13,5 - SW3	<b>420</b>
--------	-----	------------	----------	------------	-----------------	------------


### Accessories

Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 156	→ 284

# Shrink adapter, slim 3°

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

TG

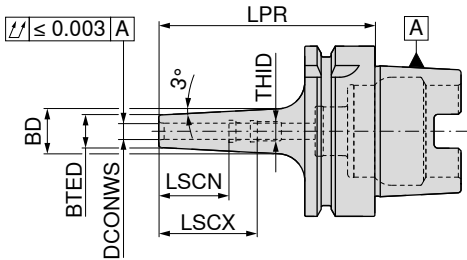


G 2,5 n<sub>max</sub> 25000


84 324 ...

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm		
short	HSK-A 63	3	80	9	14	28	12	M6	103
	HSK-A 63	4	80	10	15	28	16	M6	104
	HSK-A 63	5	80	11	16	30	20	M6	105
	HSK-A 63	6	80	12	17	36	26	M5	106
	HSK-A 63	8	80	14	19	36	26	M6	108
	HSK-A 63	10	85	16	21	41	31	M8x1	110
	HSK-A 63	12	90	18	24	47	37	M10x1	112
	HSK-A 63	14	90	20	26	47	37	M10x1	114
	HSK-A 63	16	95	22	28	50	40	M12x1	116
	HSK-A 63	18	95	24	30	50	40	M12x1	118
	HSK-A 63	20	100	26	33	52	42	M16x1	120
medium length	HSK-A 63	3	120	9	16	12	12		203
	HSK-A 63	4	120	10	17	16	16		204
	HSK-A 63	5	120	11	18	20	20		205
	HSK-A 63	6	120	12	21	36	26	M5	206
	HSK-A 63	8	120	14	23	36	26	M6	208
	HSK-A 63	10	120	16	25	41	31	M8x1	210
	HSK-A 63	12	120	18	27	47	37	M10x1	212
	HSK-A 63	14	120	20	29	47	37	M10x1	214
	HSK-A 63	16	120	22	31	50	40	M12x1	216
	HSK-A 63	18	120	24	33	50	40	M12x1	218
	HSK-A 63	20	120	26	35	52	42	M16x1	220
extra-long	HSK-A 63	3	160	9	19	12	12		303
	HSK-A 63	4	160	10	20	16	16		304
	HSK-A 63	5	160	11	21	20	20		305
	HSK-A 63	6	160	12	24	36	26	M5	306
	HSK-A 63	8	160	14	26	36	26	M6	308
	HSK-A 63	10	160	16	28	41	31	M8x1	310
	HSK-A 63	12	160	18	30	47	37	M10x1	312
	HSK-A 63	14	160	20	32	47	37	M10x1	314
	HSK-A 63	16	160	22	34	50	40	M12x1	316
	HSK-A 63	18	160	24	36	50	40	M12x1	318
	HSK-A 63	20	160	26	38	52	42	M16x1	320

→ Min. clamping depth, Page 312



Stop screw IK



Stop screw IK

83 950 ...

83 950 ...

Spare parts


DCONWS

3 - 5	M6x14 - SW2	417		
6			M5x12,5 - SW2,5	418
8			M6x12,5 - SW3	419
10			M8x1x13,5 - SW3	420
12 - 14			M10x1x13,5 - SW5	421
16 - 18			M12x1x13,5 - SW5	422
20			M16x1x13,5 - SW8	424

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip on request

TG

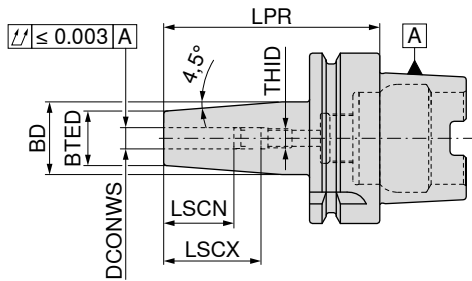

G 2,5 n<sub>max</sub> 25000

**84 304 ...**


	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm		
short	HSK-A 63	3	80	10	15	22	12	M6	103
	HSK-A 63	4	80	15	22	26	16	M6	104
	HSK-A 63	5	80	15	22	30	20	M6	105
	HSK-A 63	6	80	21	27	36	26	M5	106
	HSK-A 63	8	80	21	27	36	26	M6	108
	HSK-A 63	10	85	24	32	41	31	M8x1	110
	HSK-A 63	12	90	24	32	47	37	M10x1	112
	HSK-A 63	14	90	27	34	47	37	M10x1	114
	HSK-A 63	16	95	27	34	50	40	M12x1	116
	HSK-A 63	18	95	33	42	50	40	M12x1	118
	HSK-A 63	20	100	33	42	52	42	M16x1	120
	HSK-A 63	25	115	44	53	58	48	M16x1	125
HSK-A 63	32	120	44	53	62	52	M16x1	132	
medium length	HSK-A 63	3	120	10	20	12	12		203
	HSK-A 63	4	120	15	22	16	16		204
	HSK-A 63	5	120	15	22	20	20		205
	HSK-A 63	6	120	21	27	36	26	M5	206
	HSK-A 63	8	120	21	27	36	26	M6	208
	HSK-A 63	10	120	24	32	41	31	M8x1	210
	HSK-A 63	12	120	24	32	47	37	M10x1	212
	HSK-A 63	14	120	27	34	47	37	M10x1	214
	HSK-A 63	16	120	27	34	50	40	M12x1	216
	HSK-A 63	18	120	33	42	50	40	M12x1	218
	HSK-A 63	20	120	33	42	52	42	M16x1	220
	HSK-A 63	25	120	44	53	58	48	M16x1	225
extra-long	HSK-A 63	3	160	10	20	12	12		303
	HSK-A 63	4	160	15	22	16	16		304
	HSK-A 63	5	160	15	22	20	20		305
	HSK-A 63	6	160	21	27	36	26	M5	306
	HSK-A 63	8	160	21	27	36	26	M6	308
	HSK-A 63	10	160	24	32	41	31	M8x1	310
	HSK-A 63	12	160	24	32	47	37	M10x1	312
	HSK-A 63	14	160	27	34	47	37	M10x1	314
	HSK-A 63	16	160	27	34	50	40	M12x1	316
	HSK-A 63	18	160	33	42	50	40	M12x1	318
	HSK-A 63	20	160	33	42	52	42	M16x1	320
	HSK-A 63	25	160	44	53	62	52	M16x1	325
extra long	HSK-A 63	6	200	21	27	36	26	M5	406
	HSK-A 63	8	200	21	27	36	26	M6	408
	HSK-A 63	10	200	24	32	41	31	M8x1	410
	HSK-A 63	12	200	24	32	47	37	M10x1	412
	HSK-A 63	14	200	27	34	47	37	M10x1	414
	HSK-A 63	16	200	27	34	50	40	M12x1	416
	HSK-A 63	18	200	33	42	50	40	M12x1	418
	HSK-A 63	20	200	33	42	52	42	M16x1	420
	HSK-A 63	25	200	44	53	62	52	M16x1	425
	HSK-A 63	32	200	44	53	62	52	M16x1	432

→ Min. clamping depth, Page 312

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

TG



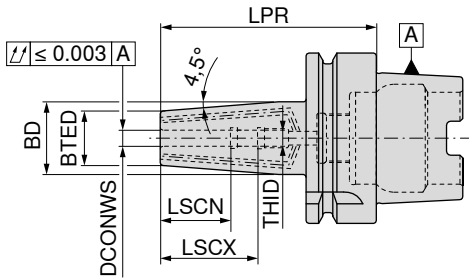


G 2,5 n<sub>max</sub> 25000

**84 316 ...**

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	
short	HSK-A 63	3	80	10	15	28	12	M6	<b>103</b>
	HSK-A 63	4	80	15	22	28	16	M6	<b>104</b>
	HSK-A 63	5	80	15	22	30	20	M6	<b>105</b>
	HSK-A 63	6	80	21	27	36	26	M5	<b>106</b>
	HSK-A 63	8	80	21	27	36	26	M6	<b>108</b>
	HSK-A 63	10	85	24	32	41	31	M8x1	<b>110</b>
	HSK-A 63	12	90	24	32	47	37	M10x1	<b>112</b>
	HSK-A 63	14	90	27	34	47	37	M10x1	<b>114</b>
	HSK-A 63	16	95	27	34	50	40	M12x1	<b>116</b>
	HSK-A 63	18	95	33	42	50	40	M12x1	<b>118</b>
	HSK-A 63	20	100	33	42	52	42	M16x1	<b>120</b>
	HSK-A 63	25	115	44	53	58	48	M16x1	<b>125</b>
	HSK-A 63	32	120	44	53	62	52	M16x1	<b>132</b>

→ Min. clamping depth, Page 312



**83 950 ...**

**83 950 ...**

**83 950 ...**

**Spare parts**

**DCONWS**

3 - 5	M6x14 - SW2	<b>417</b>	M2x6	<b>512</b>
6			M5x12,5 - SW2,5	<b>418</b>
8			M6x12,5 - SW3	<b>419</b>
10			M8x1x13,5 - SW3	<b>420</b>
12 - 14			M10x1x13,5 - SW5	<b>421</b>
16 - 18	M12x1 - SW5	<b>510</b>	M2x6	<b>512</b>
20 - 32	M16x1 - SW5	<b>511</b>	M2x6	<b>512</b>



**Accessories**

Shrink fit extension	Coolant transfer pipe	Others
→ 247	→ 156	→ 284

# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

TG

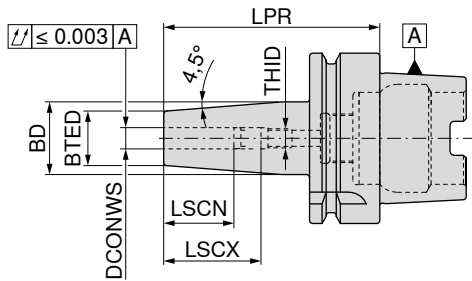

G 2,5 n<sub>max</sub> 25000

**84 305 ...**

	Adapter	DCONWS mm	LPR mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	
short	HSK-A 100	6	85	21	27	36	26	M5	106
	HSK-A 100	8	85	21	27	36	26	M6	108
	HSK-A 100	10	90	24	32	41	31	M8x1	110
	HSK-A 100	12	95	24	32	47	37	M10x1	112
	HSK-A 100	14	95	27	34	47	37	M10x1	114
	HSK-A 100	16	100	27	34	50	40	M12x1	116
	HSK-A 100	18	100	33	42	50	40	M12x1	118
	HSK-A 100	20	105	33	42	52	42	M16x1	120
	HSK-A 100	25	115	44	53	58	48	M16x1	125
	HSK-A 100	32	120	44	53	62	52	M16x1	132
medium length	HSK-A 100	6	120	21	27	36	26	M5	206
	HSK-A 100	8	120	21	27	36	26	M6	208
	HSK-A 100	10	120	24	32	41	31	M8x1	210
	HSK-A 100	12	120	24	32	47	37	M10x1	212
	HSK-A 100	14	120	27	34	47	37	M10x1	214
	HSK-A 100	16	120	27	34	50	40	M12x1	216
	HSK-A 100	18	120	33	42	50	40	M12x1	218
	HSK-A 100	20	120	33	42	52	42	M16x1	220
	HSK-A 100	25	120	44	53	58	48	M16x1	225
	extra-long	HSK-A 100	6	160	21	27	36	26	M5
HSK-A 100		8	160	21	27	36	26	M6	308
HSK-A 100		10	160	24	32	41	31	M8x1	310
HSK-A 100		12	160	24	32	47	37	M10x1	312
HSK-A 100		14	160	27	34	47	37	M10x1	314
HSK-A 100		16	160	27	34	50	40	M12x1	316
HSK-A 100		18	160	33	42	50	40	M12x1	318
HSK-A 100		20	160	33	42	52	42	M16x1	320
HSK-A 100		25	160	44	53	58	48	M16x1	325
HSK-A 100		32	160	44	53	62	52	M16x1	332

→ Min. clamping depth, Page 312

## Version for MMS heat shrink adapter 4.5° – 1 and 2-channel



TG

**84 318**

HSK-63

1-channel



This article can be found in our online shop at [cuttingtools.ceratizit.com](http://cuttingtools.ceratizit.com)

**84 318**

HSK-100

1-channel



TG

**84 319**

HSK-63

2-channel



This article can be found in our online shop at [cuttingtools.ceratizit.com](http://cuttingtools.ceratizit.com)

**84 319**

HSK-100

2-channel

# Spare parts heat shrink adapter 4.5°



		<b>83 950 ...</b>
<b>Spare parts</b>		
<b>DCONWS</b>		
6	M5x12,5 - SW2,5	<b>418</b>
8	M6x12,5 - SW3	<b>419</b>
10	M8x1x13,5 - SW3	<b>420</b>
12 - 14	M10x1x13,5 - SW5	<b>421</b>
16 - 18	M12x1x13,5 - SW5	<b>422</b>
20 - 32	M16x1x13,5 - SW8	<b>424</b>

## Accessories

		
Shrink fit extension	Coolant transfer pipe	Others
→ 247	→ 156	→ 284


# Shrink fit adapters 4.5°

- ▲ Version for high clamping force
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder with adjustable back stop

**TG**

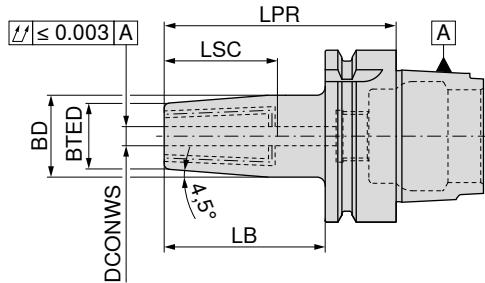

G 2,5 n<sub>max</sub> 25000


**84 717 ...**

	Adapter	Dimensions (mm)						Part No.
		DCONWS	LPR	BTED	BD	LB	LSC	
short	HSK-A 63	6	80	21	26	54	36,5	606
	HSK-A 63	8	80	21	26	54	36,5	608
	HSK-A 63	10	85	24	30	59	41,5	610
	HSK-A 63	12	90	24	30	64	46,5	612
	HSK-A 63	14	90	27	34	64	46,5	614
	HSK-A 63	16	95	27	34	69	49,5	616
	HSK-A 63	18	95	33	41	69	49,5	618
	HSK-A 63	20	100	33	41	74	51,5	620
	HSK-A 63	25	115	44	52	89	57,5	625
	HSK-A 63	32	120	44	52	94	61,5	632
	HSK-A 100	6	85	21	26	56	36,5	106
	HSK-A 100	8	85	21	26	56	36,5	108
	HSK-A 100	10	90	24	30	56	41,5	110
	HSK-A 100	12	95	24	30	66	46,5	112
	HSK-A 100	14	95	27	34	66	46,5	114
	HSK-A 100	16	100	27	34	71	49,5	116
	HSK-A 100	18	100	33	42	71	49,5	118
	HSK-A 100	20	105	33	42	76	51,5	120
HSK-A 100	25	115	44	53	86	57,5	125	
HSK-A 100	32	120	44	53	91	61,5	132	

→ Min. clamping depth, Page 312



Stop screw IK



Sealing screw

**62 950 ...**

**62 950 ...**

### Spare parts

#### DCONWS

DCONWS	Part No.	Thread	Part No.
6	402	M5x0,8x14	411
8	403	M6x1x16	411
10	404	M8x1x20	411
12 - 18	405	M10x1x20	411
20 - 32	406	M12x1x20	412

Sealing screw for closing of two additional coolant holes.

### Accessories

Shrink fit extension	Coolant transfer pipe	Others
→ 247	→ 156	→ 284



# Shrink fit adapters 4.5°

- ▲ Version for high clamping force
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder with adjustable back stop

**TG**

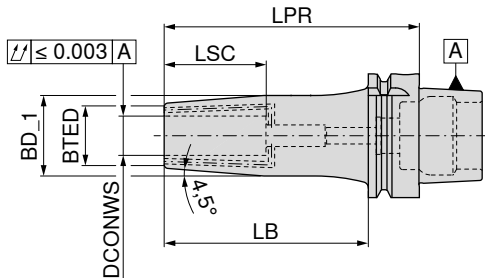

G 2,5 n<sub>max</sub> 25000    G 2,5 n<sub>max</sub> 25000

	Adapter	DCONWS	LPR	BTED	BD_1	LB	LSC		
		mm	mm	mm	mm	mm	mm	84 720 ...	84 723 ...
long	HSK-A 63	6	130	21	27	104	36,5	606	
	HSK-A 63	8	130	21	27	104	36,5	608	
	HSK-A 63	10	130	24	32	104	41,5	610	
	HSK-A 63	12	130	24	32	104	46,5	612	
	HSK-A 63	14	130	27	34	104	46,5	614	
	HSK-A 63	16	130	27	34	104	49,5	616	
	HSK-A 63	18	130	33	41	104	49,5	618	
	HSK-A 63	20	130	33	41	104	51,5	620	
	HSK-A 100	6	130	21	27	101	36,5	106	
	HSK-A 100	8	130	21	27	101	36,5	108	
	HSK-A 100	10	130	24	32	101	41,5	110	
	HSK-A 100	12	130	24	32	101	46,5	112	
	HSK-A 100	14	130	27	34	101	46,5	114	
	HSK-A 100	16	130	27	34	101	49,5	116	
	HSK-A 100	18	130	33	41	101	49,5	118	
	HSK-A 100	20	130	33	41	101	51,5	120	
extra-long	HSK-A 63	6	160	21	27	134	36,5		606
	HSK-A 63	8	160	21	27	134	36,5		608
	HSK-A 63	10	160	24	32	134	41,5		610
	HSK-A 63	12	160	24	32	134	46,5		612
	HSK-A 63	14	160	27	34	134	46,5		614
	HSK-A 63	16	160	27	34	134	49,5		616
	HSK-A 63	18	160	33	41	134	49,5		618
	HSK-A 63	20	160	33	41	134	51,5		620
	HSK-A 63	25	160	44	52	134	57,5		625
	HSK-A 100	6	160	21	27	131	36,5		106
	HSK-A 100	8	160	21	27	131	36,5		108
	HSK-A 100	10	160	24	32	131	41,5		110
	HSK-A 100	12	160	24	32	131	46,5		112
	HSK-A 100	14	160	27	34	131	46,5		114
	HSK-A 100	16	160	27	34	131	49,5		116
	HSK-A 100	18	160	33	41	131	49,5		118
HSK-A 100	20	160	33	41	131	51,5		120	
HSK-A 100	25	160	44	53	131	57,5		125	
HSK-A 100	32	160	44	53	131	61,5		132	


→ Min. clamping depth, Page 312



# Shrink fit adapters 4.5°

- ▲ for solid carbide and HSS shanks to h6 tolerance or better
- ▲ also available with Balluff chip **on request**

**TG**

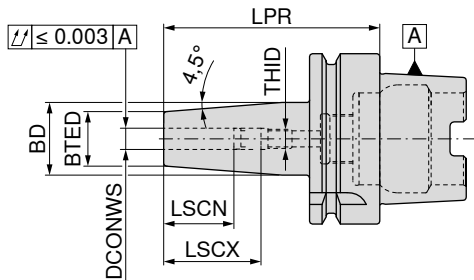


G 2,5 n<sub>max</sub> 25000

**82 310 ...**

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID	
		mm	mm	mm	mm	mm	mm		
short	HSK-A 63	3	80	10	15	22	12		10357
	HSK-A 63	4	80	15	22	26	16		10457
	HSK-A 63	5	80	15	22	30	20		10557
	HSK-A 63	6	80	21	27	36	26	M5	10657
	HSK-A 63	8	80	21	27	36	26	M6	10857
	HSK-A 63	10	85	24	32	41	31	M8x1	11057
	HSK-A 63	12	90	24	32	47	37	M10x1	11257
	HSK-A 63	14	90	27	34	47	37	M10x1	11457
	HSK-A 63	16	95	27	34	50	40	M12x1	11657
	HSK-A 63	18	95	33	42	50	40	M12x1	11857
	HSK-A 63	20	100	33	42	52	42	M16x1	12057
	HSK-A 63	25	115	44	53	58	48	M16x1	12557
HSK-A 63	32	120	44	53	62	52	M16x1	13257	
medium length	HSK-A 63	3	120	10	20	12	12		20357
	HSK-A 63	4	120	15	22	16	16		20457
	HSK-A 63	5	120	15	22	20	20		20557
	HSK-A 63	6	120	21	27	36	26	M5	20657
	HSK-A 63	8	120	21	27	36	26	M6	20857
	HSK-A 63	10	120	24	32	41	31	M8x1	21057
	HSK-A 63	12	120	24	32	47	37	M10x1	21257
	HSK-A 63	14	120	27	34	47	37	M10x1	21457
	HSK-A 63	16	120	27	34	50	40	M12x1	21657
	HSK-A 63	18	120	33	42	50	40	M12x1	21857
	HSK-A 63	20	120	33	42	52	42	M16x1	22057
	HSK-A 63	25	120	44	53	58	48	M16x1	22557
extra-long	HSK-A 63	3	160	10	20	12	12		30357
	HSK-A 63	4	160	15	22	16	16		30457
	HSK-A 63	5	160	15	22	20	20		30557
	HSK-A 63	6	160	21	27	36	26	M5	30657
	HSK-A 63	8	160	21	27	36	26	M6	30857
	HSK-A 63	10	160	24	32	41	31	M8x1	31057
	HSK-A 63	12	160	24	32	47	37	M10x1	31257
	HSK-A 63	14	160	27	34	47	37	M10x1	31457
	HSK-A 63	16	160	27	34	50	40	M12x1	31657
	HSK-A 63	18	160	33	42	50	40	M12x1	31857
	HSK-A 63	20	160	33	42	52	42	M16x1	32057
	HSK-A 63	25	160	44	53	62	52	M16x1	32557

→ Min. clamping depth, Page 312



**82 950 ...**


**Spare parts**

**DCONWS**

3 - 5	M6x16 - SW3	30100
6	M5x16 - SW2,5	30000
8	M6x16 - SW3	30100
10	M8x1x16 - SW4	30200
12 - 14	M10x1x14 - SW5	30300
16 - 18	M12x1x16 - SW6	30400
20 - 32	M16x1x16 - SW8	30500

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

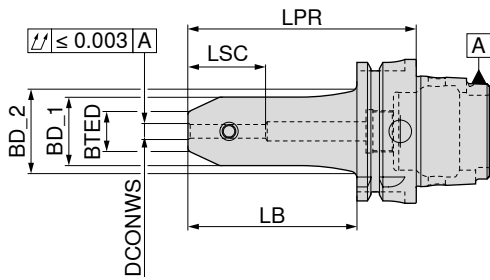



G 2,5 n<sub>max</sub> 25000    G 2,5 n<sub>max</sub> 25000

	Adapter	DCONWS <sub>H5</sub>		LPR	BTED	BD_1	BD_2	LB	LSC	82 740 ...		82 741 ...	
		mm	mm										
short	HSK-A 63	6	65	17	30			39	34	10657		10657	
	HSK-A 63	8	65	20	32			39	34	10857		10857	
	HSK-A 63	10	65	25	35			39	39	11057		11057	
	HSK-A 63	12	80	30	42			54	44	11257		11257	
	HSK-A 63	14	80	32	45			54	44	11457		11457	
	HSK-A 63	16	80	36	48			54	47	11657		11657	
	HSK-A 63	18	80	38	48			54	47	11857		11857	
	HSK-A 63	20	80	40	52			54	49	12057		12057	
	HSK-A 63	25	110	45	63			84	54	12557 <sup>1)</sup>		12557 <sup>1)</sup>	
	HSK-A 63	32	110	52	72			84	58	13257 <sup>1)</sup>		13257 <sup>1)</sup>	
medium length	HSK-A 100	6	80	17	30			51	34	10655		10655	
	HSK-A 100	8	80	20	32			51	34	10855		10855	
	HSK-A 100	10	80	25	35			51	39	11055		11055	
	HSK-A 100	12	80	30	42			51	44	11255		11255	
	HSK-A 100	14	80	32	45			51	44	11455		11455	
	HSK-A 100	16	100	36	48			71	47	11655		11655	
	HSK-A 100	18	100	38	48			71	47	11855		11855	
	HSK-A 100	20	100	40	52			71	49	12055		12055	
	HSK-A 100	25	100	45	65			71	54	12555 <sup>1)</sup>		12555 <sup>1)</sup>	
	HSK-A 100	32	100	52	72			71	58	13255 <sup>1)</sup>		13255 <sup>1)</sup>	
long	HSK-A 63	6	130	17	30	36,2		104	34	30657		30657	
	HSK-A 63	8	130	20	32	38,2		104	34	30857		30857	
	HSK-A 63	10	130	25	35	41,2		104	39	31057		31057	
	HSK-A 63	12	130	30	42	48,2		104	44	31257		31257	
	HSK-A 63	14	130	32	45	50,5		104	44	31457		31457	
	HSK-A 63	16	130	36	48	50,1		104	47	31657		31657	
	HSK-A 63	18	130	38	48	50,1		104	47	31857		31857	
	HSK-A 63	20	130	40	52			104	49	32057		32057	
	HSK-A 63	25	130	45	63			104	54	32557 <sup>1)</sup>		32557 <sup>1)</sup>	
	HSK-A 63	32	130	52	72			104	58	33257 <sup>1)</sup>		33257 <sup>1)</sup>	

1) Version with two grub screws

# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip **on request**

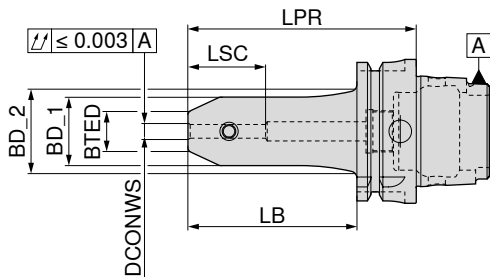

G 2,5 n<sub>max</sub> 25000    G 2,5 n<sub>max</sub> 25000

	Adapter	DCONWS <sub>H5</sub>		LPR	BTED	BD_1	BD_2	LB	LSC	82 740 ...		82 741 ...	
		mm	mm										
extra-long	HSK-A 63	6	160	17	30	36,2	134	34		40657		40657	
	HSK-A 63	8	160	20	32	38,2	134	34		40857		40857	
	HSK-A 63	10	160	25	35	41,2	134	39		41057		41057	
	HSK-A 63	12	160	30	42	48,2	134	44		41257		41257	
	HSK-A 63	14	160	32	45	50,5	134	44		41457		41457	
	HSK-A 63	16	160	36	48	50,1	134	47		41657		41657	
	HSK-A 63	18	160	38	48	50,1	134	47		41857		41857	
	HSK-A 63	20	160	40	52		134	49		42057		42057	
	HSK-A 63	25	160	45	63		134	54		42557 <sup>1)</sup>		42557 <sup>1)</sup>	
	HSK-A 100	6	160	17	30	38,2	131	34		40655		40655	
	HSK-A 100	8	160	20	32	40,2	131	34		40855		40855	
	HSK-A 100	10	160	25	35	43,2	131	39		41055		41055	
	HSK-A 100	12	160	30	42	50,2	131	44		41255		41255	
	HSK-A 100	14	160	32	45	53,2	131	44		41455		41455	
	HSK-A 100	16	160	36	48	56,2	131	47		41655		41655	
	HSK-A 100	18	160	38	48	56,2	131	47		41855		41855	
	HSK-A 100	20	160	40	52	60,2	131	49		42055		42055	
	HSK-A 100	25	160	45	65	73,2	131	54		42555 <sup>1)</sup>		42555 <sup>1)</sup>	
	HSK-A 100	32	160	52	72	79,5	134	58		43255 <sup>1)</sup>		43255 <sup>1)</sup>	

1) Version with two grubscrews




The M3 screws with WAF 1.5 mm supplied can be used to seal the two additional coolant holes.

### Accessories

Coolant transfer pipe	Others
→ 156	→ 284

## Tool holder for tools with angled clamping flat (Whistle Notch)

- ▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
- ▲ also available with Balluff chip **on request**

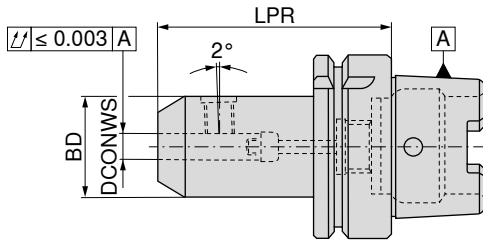

G 2,5 n<sub>max</sub> 25000

82 742 ...

	Adapter	DCONWS	LPR	BD	
		mm	mm	mm	
short	HSK-A 63	6	80	25	10657
	HSK-A 63	8	80	28	10857
	HSK-A 63	10	80	35	11057
	HSK-A 63	12	90	42	11257
	HSK-A 63	14	90	44	11457
	HSK-A 63	16	100	48	11657
	HSK-A 63	18	100	50	11857
	HSK-A 63	20	100	52	12057
	HSK-A 63	25	110	65	12557 <sup>1)</sup>
	HSK-A 63	32	110	72	13257 <sup>1)</sup>
	HSK-A 100	6	90	25	10655
	HSK-A 100	8	90	28	10855
	HSK-A 100	10	90	35	11055
	HSK-A 100	12	100	42	11255
	HSK-A 100	14	100	44	11455
	HSK-A 100	16	100	48	11655
	HSK-A 100	18	100	50	11855
	HSK-A 100	20	110	52	12055
	HSK-A 100	25	120	65	12555 <sup>1)</sup>
	HSK-A 100	32	120	72	13255 <sup>1)</sup>
HSK-A 100	40	120	80	14055 <sup>1)</sup>	

1) Version with two grub screws



Grubscrew

62 950 ...

### Spare parts

#### DCONWS


6	M6x10	006
8	M8x10	008
10	M10x12	010
12 - 14	M12x16	012
16 - 18	M14x16	016
20	M16x16	020
25	M18x2x20	025
32 - 40	M20x2x20	032

### Accessories

Coolant transfer pipe	Others
→ 156	→ 284

# Indexable insert drill adapter ISO 12164 HSK Form A

▲ also available with Balluff chip on request

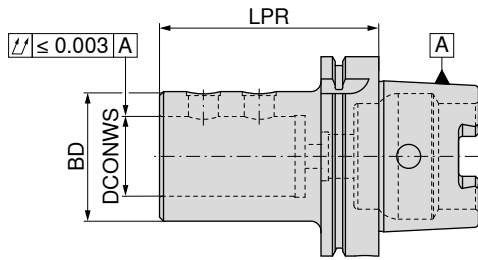

G 6,3 n<sub>max</sub> 15000

10 842 ...

Adapter	DCONWS mm	LPR mm	BD mm	
HSK-A 63	20	80	40	320
HSK-A 63	25	90	45	325
HSK-A 63	32	90	52	332
HSK-A 63	40	110	65	340
HSK-A 100	20	90	40	420
HSK-A 100	25	100	45	425
HSK-A 100	32	100	52	432
HSK-A 100	40	110	65	440
HSK-A 100	50	120	75	450

Suitable eccentric sleeves can be found in → **Chapter 3, Indexable insert drilling.**



Grubscrew

10 950 ...

### Spare parts

DCONWS		
20	M10x1x10	001
25 - 32	M12x1x10	002
40 - 50	M16x1x12	003

### Accessories


Coolant transfer pipe	Others
→ 156	→ 284

# ER Precision Collet chuck – PCC

- ▲ For standard or sealing disc lock nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 100$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with lock nut and backstop screw

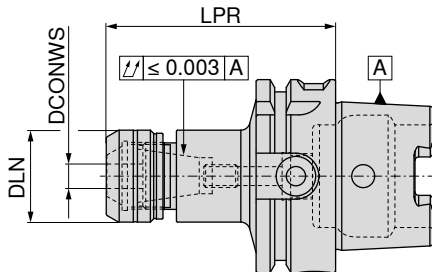

G 2,5  $n_{max}$  25000

**82 700 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	for collet	Torque moment / Clamping force Nm	
HSK-A 63	1 - 10	75	30	426E (ER16)	40 / 2-70	11057
HSK-A 63	1 - 10	100	30	426E (ER16)	40 / 2-70	21057
HSK-A 63	2 - 16	75	40	430E (ER25)	80 / 10-160	11657
HSK-A 63	2 - 16	100	40	430E (ER25)	80 / 10-160	21657
HSK-A 63	2 - 20	75	50	470E (ER32)	125 / 15-250	12057
HSK-A 63	2 - 20	100	50	470E (ER32)	125 / 15-250	22057
HSK-A 100	2 - 16	100	40	430E (ER25)	80 / 10-160	21655
HSK-A 100	2 - 16	160	40	430E (ER25)	80 / 10-160	41655
HSK-A 100	2 - 20	100	50	470E (ER32)	125 / 15-250	22055
HSK-A 100	2 - 20	160	50	470E (ER32)	125 / 15-250	42055



Dimension LPR is 4.5 mm longer for ER16 and ER32 and 5.0 mm longer for ER25 when using thro' coolant lock nut

	Lock nut IK 82 950 ...	Lock nut 82 950 ...	Backstop screw PCC 2 82 950 ...	Backstop screw PCC 1 82 950 ...
<b>Spare parts for collet</b>				
426E (ER16)	11000	01000	M8X3,0	00100
430E (ER25)	11600	01600	M18x1,5	00300
470E (ER32)	12000	02000	M18x1,5	00300

### Accessories


ER collet	Sealing ring	Roll key
→ 268-276, 278-279	→ 281	→ 286

# ER Collet chuck

▲ also available with Balluff chip on request

### Scope of supply:

Toolholder including nut

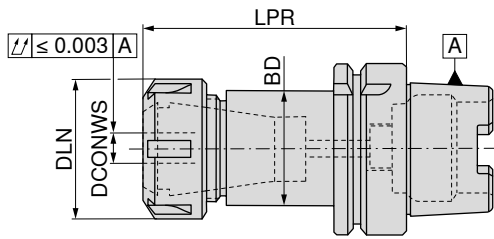

G 2,5  $n_{max}$  25000








82 743 ...

	Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	
medium length	HSK-A 63	1 - 10	100	22	8 - 56	426E (ER16 mini)	21157
	HSK-A 63	1 - 10	100	32	8 - 56	426E (ER16)	21057
	HSK-A 63	1 - 16	100	42	24 - 104	430E (ER25)	21657
	HSK-A 63	2 - 20	100	50	24 - 136	470E (ER32)	22057
	HSK-A 63	3 - 26	100	63	176	472E (ER40)	22657
long	HSK-A 100	1 - 10	100	32	8 - 56	426E (ER16)	21055
	HSK-A 100	1 - 16	100	42	24 - 104	430E (ER25)	21655
	HSK-A 100	2 - 20	100	50	24 - 136	470E (ER32)	22055
	HSK-A 100	3 - 26	100	63	176	472E (ER40)	22655
extra-long	HSK-A 63	1 - 10	160	22	8 - 56	426E (ER16 mini)	41157
	HSK-A 63	1 - 10	160	32	8 - 56	426E (ER16)	41057
	HSK-A 63	1 - 16	160	42	24 - 104	430E (ER25)	41657
	HSK-A 63	2 - 20	160	50	24 - 136	470E (ER32)	42057
	HSK-A 63	3 - 26	160	63	176	472E (ER40)	42657
	HSK-A 100	1 - 10	160	32	8 - 56	426E (ER16)	41055
	HSK-A 100	1 - 16	160	42	24 - 104	430E (ER25)	41655
	HSK-A 100	2 - 20	160	50	24 - 136	470E (ER32)	42055
	HSK-A 100	3 - 26	160	63	176	472E (ER40)	42655
	extra long	HSK-A 100	1 - 10	200	32	8 - 56	426E (ER16)
HSK-A 100		1 - 16	200	42	24 - 104	430E (ER25)	51655
HSK-A 100		2 - 20	200	50	24 - 136	470E (ER32)	52055
HSK-A 100		3 - 26	200	63	176	472E (ER40)	52655



Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

## Spare parts ER collet chucks

	 Lock nut IK	 Lock nut	 Y clamping key	 ER Mini clamping key	 Mini lock nut	 Mini IK	 Stop screw IK
	83 950 ...	62 950 ...	83 357 ...	83 950 ...	62 950 ...	83 950 ...	82 950 ...
<b>Spare parts for collet</b>							
426E (ER16 mini)				101	066	058	30000
426E (ER16)	054	054	116				
430E (ER25)	055	055	125				
470E (ER32)	056	65600	132				
472E (ER40)	057	65700	140				

### Accessories

		
ER collet	Coolant transfer pipe	Others
→ 268–276, 279	→ 156	→ 284




# Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Toolholder including clamping key SW4

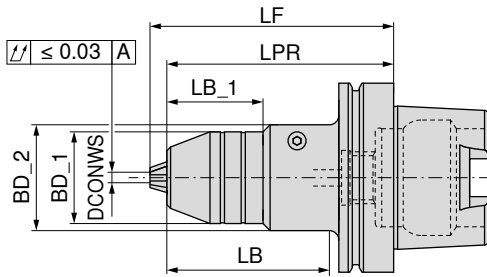

G 6,3 n<sub>max</sub> 10000

**84 716 ...**

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LPR mm	LF mm	
<b>HSK-A 63</b>	0,5 - 13	48,5	56	50,9		126,0	116,9	<b>613</b>
<b>HSK-A 63</b>	2,5 - 16	51,0	56	50,9		127,5	116,9	<b>616</b>
<b>HSK-A 100</b>	0,5 - 13	48,5	56	50,9	86	129,0	120,0	<b>113</b>
<b>HSK-A 100</b>	2,5 - 16	51,0	56	50,9	86	130,5	120,0	<b>116</b>


Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

*Accessories*

Others  
→ 284

## Synchro tapping chuck with minimum length compensation

- ▲ For collets according to DIN 6499
- ▲ With length compensation under tension and under compression (LZD)
- ▲  $p_{max} = 50$  bar
- ▲ also available with Balluff chip on request

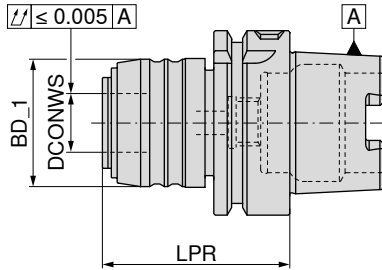

83 724 ...

Adapter	cutting range	SZID	DCONWS mm	LPR mm	BD_1 mm	LZD± mm
HSK-A 63	M3 - M12	1	20	64	43	1,0 / 0,2
HSK-A 63	M6 - M20	2	32	97	60	1,0 / 0,2
HSK-A 100	M3 - M12	1	20	70	43	1,0 / 0,2
HSK-A 100	M6 - M20	2	32	91	60	1,0 / 0,2

612  
620  
112  
120

### Accessories



Coolant transfer pipe

Others

→ 156


→ 284

## Insert for synchro quick change tapping chuck with minimum length compensation

- ▲ SZID = for insert size

### Scope of supply:

Includes lock nut

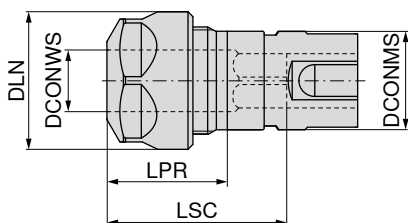

83 608 ...


SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32

012 <sup>1)</sup>  
020


1) with 6 position lock nut

## Spare parts for synchronous tapping chucks


Spare parts for Article no.	62 950 ...		83 950 ...		62 950 ...		83 357 ...	
	83 608 012	M22x1,5 - SW25	044	M22x1,5	054	M22x1,5	054	116
83 608 020				M32x1,5	055	M32x1,5	055	125



Lock nut



Lock nut IK




Lock nut



Y clamping key

## Quick change tap chuck with length compensation

- ▲ With length compensation under tension and compression (LZD)
- ▲ also available with Balluff chip **on request**

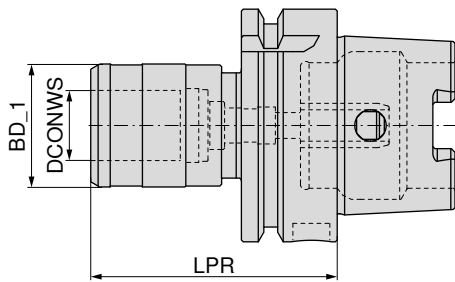

83 712 ...


Adapter	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	
HSK-A 63	01	72	41	19	7,5	612
HSK-A 63	02	110	60	31	10	620
HSK-A 100	01	80	41	19	7,5	112
HSK-A 100	02	100	60	31	10	120

### Accessories

Collet	Coolant transfer pipe	Others
→ 288, 290-292	→ 156	→ 284

## Adapter with ABS Connection

▲ also available with Balluff chip **on request**

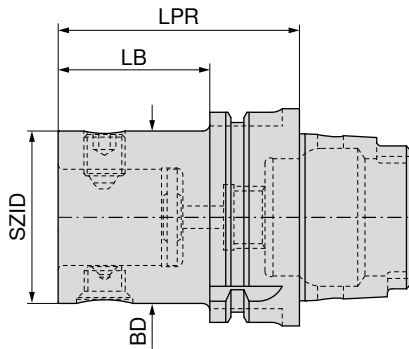

G 6,3 n<sub>max</sub> 10000

84 200 ...

Adapter	KOMET no.	SZID	BD	LPR	LB	
			mm	mm	mm	
HSK-A 63	A06 30120	ABS 25	25	50	24	06390
HSK-A 63	A06 30130	ABS 32	32	50	24	06389
HSK-A 63	A06 30140	ABS 40	40	60	34	06388
HSK-A 63	A06 30150	ABS 50	50	70	44	06397
HSK-A 63	A06 30160	ABS 63	63	80	54	06396
HSK-A 63	A06 30170	ABS 80	80	100	74	06392
HSK-A 100	A06 50120	ABS 25	25	60	31	10090
HSK-A 100	A06 50130	ABS 32	32	60	31	10089
HSK-A 100	A06 50140	ABS 40	40	80	51	10088
HSK-A 100	A06 50150	ABS 50	50	80	51	10097
HSK-A 100	A06 50160	ABS 63	63	80	51	10096
HSK-A 100	A06 50170	ABS 80	80	90	61	10092
HSK-A 100	A06 50180	ABS 100	100	100	71	10091


## Eccentric adjuster with ABS Connection

▲ Adjustment ± 0.25 mm on diameter

▲ also available with Balluff chip **on request**

### Scope of supply:

Eccentric adjuster with adjuster key Ø 2.8 mm

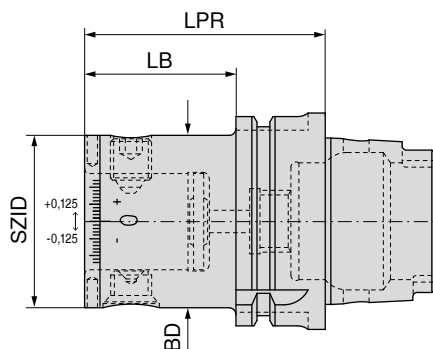


84 203 ...

Adapter	KOMET no.	SZID	BD	LPR	LB	
			mm	mm	mm	
HSK-A 63	A06 36730	ABS 50	50	70,0	39,5	06397
HSK-A 100	A06 56730	ABS 50	50	75,5	46,5	10097
HSK-A 100	A06 56740	ABS 63	63	80,0	51,0	10096

# Torsional vibration dampers with ABS Connection

▲ also available with Balluff chip on request

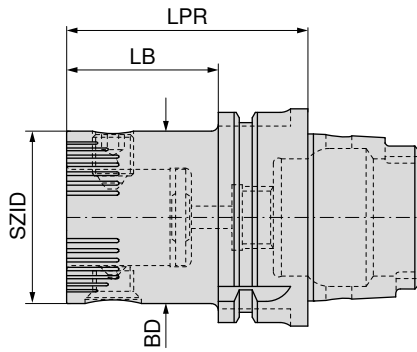

Adapter	KOMET no.	SZID	BD	LPR	LB	
			mm	mm	mm	
HSK-A 63	A06 30251	ABS 50	50	70	44	84 206 ...
HSK-A 63	A06 30261	ABS 63	63	80	54	06397
HSK-A 63	A06 30270	ABS 80	80	100	74	06396
						06392
HSK-A 100	A06 50251	ABS 50	50	80	51	10097
HSK-A 100	A06 50261	ABS 63	63	80	51	10096
HSK-A 100	A06 50270	ABS 80	80	90	61	10092

	Clamping screw	Taper screw
84 950 ...	84 950 ...	84 950 ...
ABS 50	20300	20400
ABS 63	25500	27300
ABS 80	25600	25100

## Spare parts

### SZID


ABS 50  
ABS 63  
ABS 80

## Accessories

Coolant transfer pipe	Extension	Others
→ 156	→ 187	→ 284

# Adapter for milling cutters with threaded end

▲ also available with Balluff chip on request

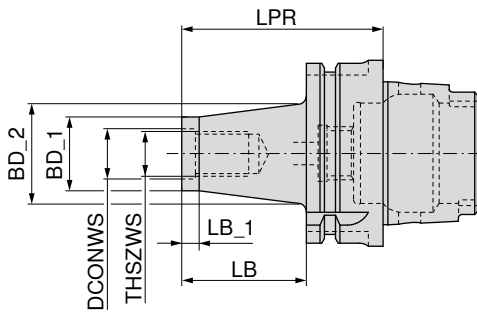

G 2,5 n<sub>max</sub> 30000

56 714 ...


Adapter	THSZWS	DCONWS	LB	BD_1	BD_2	LB_1	LPR	
		mm	mm	mm	mm	mm	mm	
HSK-A 63	M8	8,5	25	13,8	15	12	51	081
HSK-A 63	M8	8,5	50	13,8	23	12	76	082
HSK-A 63	M8	8,5	75	13,8	25	12	101	083
HSK-A 63	M8	8,5	100	13,8	30	12	126	084
HSK-A 63	M10	10,5	25	18,0	23	12	51	101
HSK-A 63	M10	10,5	50	18,0	25	12	76	102
HSK-A 63	M10	10,5	75	18,0	30	12	101	103
HSK-A 63	M10	10,5	100	18,0	35	12	126	104
HSK-A 63	M12	12,5	25	21,0	24	12	51	121
HSK-A 63	M12	12,5	50	21,0	30	12	76	122
HSK-A 63	M12	12,5	75	21,0	35	12	101	123
HSK-A 63	M12	12,5	100	21,0	38	12	126	124
HSK-A 63	M12	12,5	125	21,0	43	12	151	125
HSK-A 63	M12	12,5	150	21,0	45	12	176	126
HSK-A 63	M16	17,0	25	29,0	29	12	51	161
HSK-A 63	M16	17,0	50	29,0	34	12	76	162
HSK-A 63	M16	17,0	75	29,0	35	12	101	163
HSK-A 63	M16	17,0	100	29,0	40	12	126	164
HSK-A 63	M16	17,0	125	29,0	44	12	151	165
HSK-A 63	M16	17,0	150	29,0	48	12	176	166

### Accessories

Extension-Reduction set → 257	Coolant transfer pipe → 156	Others → 284

# Adapter for milling cutters with threaded end

▲ also available with Balluff chip on request

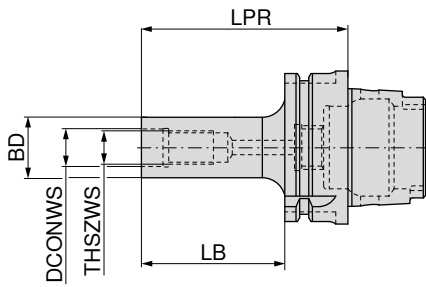

G 2,5 n<sub>max</sub> 25000

**56 719 ...**

Adapter	THSZWS	DCONWS	BD	LB	LPR	
		mm	mm	mm	mm	
HSK-A 63	M8	8,5	13,8	50	76	<b>082</b>
HSK-A 63	M10	10,5	18,0	50	76	<b>102</b>
HSK-A 63	M10	10,5	18,0	100	126	<b>104</b>
HSK-A 63	M12	12,5	21,0	50	76	<b>122</b>
HSK-A 63	M12	12,5	21,0	100	126	<b>124</b>
HSK-A 63	M16	17,0	29,0	50	76	<b>162</b>
HSK-A 63	M16	17,0	29,0	100	126	<b>164</b>

## Accessories


Extension-Reduction set → 257	Coolant transfer pipe → 156	Others → 284

# Combination shell mill adapter

- ▲ For milling cutters with transverse or longitudinal groove according to DIN 6358
- ▲ also available with Balluff chip **on request**

### Scope of supply:

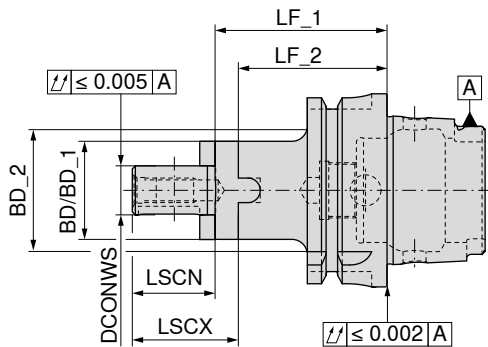

Toolholder with clamping screw, driving ring and dowel spring



G 2,5 n<sub>max</sub> 25000

**82 744 ...**

	Adapter	DCONWS	LF_1	LF_2	BD	BD_1	BD_2	LSCX	LSCN	BHTA	
		mm	mm	mm	mm	mm	mm	mm	mm		
short	HSK-A 63	16	60	50	32			27	17		11657
	HSK-A 63	22	60	48	40			31	19		12257
	HSK-A 63	27	60	48	48			33	21		12757
	HSK-A 63	32	60	46	58			38	24		13257
	HSK-A 63	40	70	56	70			41	27		14057
	HSK-A 100	16	60	50	32			27	17		11655
	HSK-A 100	22	60	48	40			31	19		12255
	HSK-A 100	27	60	48	48			33	21		12755
	HSK-A 100	32	60	46	58			38	24		13255
	HSK-A 100	40	70	56	70			41	27		14055
medium length	HSK-A 63	16	100	90	32			27	17		21657
	HSK-A 63	22	100	88	40			31	19		22257
	HSK-A 63	27	100	88	48			33	21		22757
	HSK-A 63	32	100	86	58			38	24		23257
	HSK-A 63	40	100	86	70			41	27		24057
extra-long	HSK-A 63	16	160	150		32	43,21	27	17	4,5°	41657
	HSK-A 63	22	160	148		40	47,25	31	19	3,0°	42257
	HSK-A 63	27	160	148	48			33	21		42757
	HSK-A 63	32	160	146	58			38	24		43257
	HSK-A 63	40	160	146	70			41	27		44057

		
Parallel key	Drive ring	clamping screw
<b>83 950 ...</b>	<b>83 370 ...</b>	<b>83 950 ...</b>

### Spare parts

DCONWS					
16	4 x 4 x 20	284	116	M8x25	113
22	6 x 6 x 25	285	122	M10x25	124
27	7 x 7 x 25	286	127	M12x30	125
32	8 x 7 x 28	287	132	M16x35	126
40	10 x 8 x 32	288	140	M20x40 - SW17	112

### Accessories

		
Milling Adapter Rings	Coolant transfer pipe	Others
→ 263	→ 156	→ 284





# Shell mill adapter with reduced flange diameter

- ▲ Screwed drive dogs
- ▲ also available with Balluff chip on request

**Scope of supply:**

Base body with retaining screw and drive dog

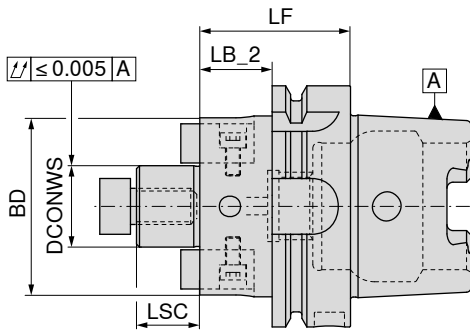


G 2,5 n<sub>max</sub> 25000

**82 315 ...**

short	Adapter	DCONWS	LB_2	LF	BD	LSC	
		mm	mm	mm	mm	mm	
	HSK-A 63	22	34	60	38	19	<b>12257</b>
	HSK-A 63	27	34	60	48	21	<b>12757</b>
	HSK-A 100	22	31	60	38	19	<b>12255</b>
	HSK-A 100	27	31	60	48	21	<b>12755</b>

**i** These shell mill adapters have been specially developed for MaxiMill 211-KN porcupine cutters. Now they can be clamped perfectly, thanks to the adapted flange diameters.



Screw for drivers



Driver



clamping screw

**83 950 ...**

**83 950 ...**

**83 950 ...**

**Spare parts**



DCONWS						
22	M4x8	<b>51700</b>	10x7x20,5	<b>51500</b>	M10x25	<b>124</b>
27	M5x8	<b>51800</b>	12x9x24,3	<b>51600</b>	M12x30	<b>125</b>

# Shell mill adapter

- ▲ for face mills with transverse groove ISO 3937
- ▲ also available with Balluff chip on request

### Scope of supply:

Toolholder with retaining screw and drive dogs

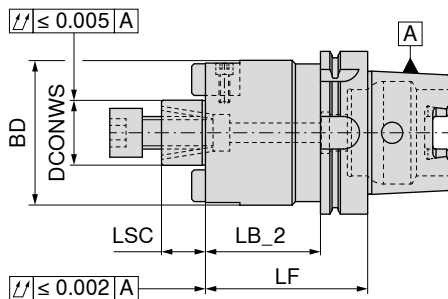






G 2,5 n<sub>max</sub> 25000

82 745 ...

	Adapter	DCONWS mm	LB_2 mm	LF mm	BD mm	BD_1 mm	BD_2 mm	LSC mm	
short	HSK-A 63	16	34	60	38			17	11657
	HSK-A 63	22	34	60	48			19	12257
	HSK-A 63	27	34	60	58			21	12757
	HSK-A 63	32	34	60	78			24	13257
	HSK-A 63	40	34	70	88			27	14057 <sup>1)</sup>
	HSK-A 100	16	31	60	38			17	11655
	HSK-A 100	22	31	60	48			19	12255
	HSK-A 100	27	31	60	58			21	12755
	HSK-A 100	32	31	60	78			24	13255
	HSK-A 100	40	41	70	88			27	14055 <sup>1)</sup>
medium length	HSK-A 63	16	74	100		38	44,3	17	21657
	HSK-A 63	22	74	100		48	50,3	19	22257
	HSK-A 63	27	74	100	58			21	22757
	HSK-A 63	32	74	100	78			24	23257
	HSK-A 63	40	74	100	88			27	24057 <sup>1)</sup>
	HSK-A 100	16	71	100		38	46,3	17	21655
	HSK-A 100	22	71	100		48	56,3	19	22255
	HSK-A 100	27	71	100		58	66,3	21	22755
	HSK-A 100	32	71	100		78	80,3	24	23255
	HSK-A 100	40	71	100	88			27	24055 <sup>1)</sup>
long	HSK-A 63	16	104	130		38	44,3	17	31657
	HSK-A 63	22	104	130		48	50,3	19	32257
	HSK-A 63	27	104	130	58			21	32757
	HSK-A 63	32	104	130	78			24	33257
	HSK-A 63	40	104	130	88			27	34057 <sup>1)</sup>
	HSK-A 100	16	101	130		38	46,3	17	31655
	HSK-A 100	22	101	130		48	56,3	19	32255
	HSK-A 100	27	101	130		58	66,3	21	32755
	HSK-A 100	32	101	130		78	80,3	24	33255
	HSK-A 100	40	101	130	88			27	34055 <sup>1)</sup>
extra-long	HSK-A 63	16	134	160		38	44,3	17	41657
	HSK-A 63	22	134	160		48	50,3	19	42257
	HSK-A 63	27	134	160	58			21	42757
	HSK-A 63	32	134	160	78			24	43257
	HSK-A 63	40	134	160	88			27	44057 <sup>1)</sup>
	HSK-A 100	16	131	160		38	46,3	17	41655
	HSK-A 100	22	131	160		48	56,3	19	42255
	HSK-A 100	27	131	160		58	66,3	21	42755
	HSK-A 100	32	131	160		78	80,3	24	43255
	HSK-A 100	40	131	160	88			27	44055 <sup>1)</sup>


1) with cross screw and 4 holes M12, Pitch Circle diameter = 66.7 mm, coolant outlet on the outer diameter of the spigot (DCONWS)!

## Spare parts facemill adapters

			
	83 368 ...	83 367 ...	83 950 ...
<b>Spare parts</b>			
<b>DCONWS</b>			
16	<b>116</b> M8	<b>016</b> M8x25	<b>113</b>
22	<b>122</b> M10	<b>022</b> M10x25	<b>124</b>
27	<b>127</b> M12	<b>027</b> M12x30	<b>125</b>
32	<b>132</b> M16	<b>032</b> M16x35	<b>126</b>
40	<b>140</b> M20	<b>040</b> M20x40 - SW17	<b>112</b>
			
		83 950 ...	83 950 ...
<b>Spare parts</b>			
<b>DCONWS</b>			
16	M3x8	<b>296</b> 8x9x17,5	<b>120</b>
22	M4x12	<b>297</b> 10x11x20,5	<b>121</b>
27	M5x12	<b>136</b> 12x13x24,3	<b>122</b>
32	M5x20	<b>137</b> 14x21x21,2	<b>123</b>
40	M6x16	<b>138</b> 15,9x16,3x19,5	<b>295</b>

# Milling sleeve adapter for Morse taper shanks to DIN 228-2 D

▲ also available with Balluff chip on request

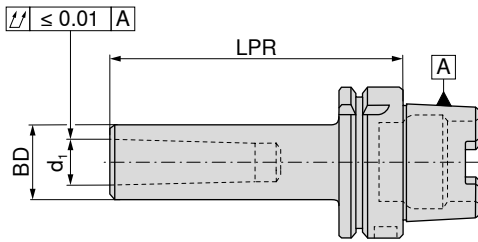

G 6,3 n<sub>max</sub> 8000

**82 746 ...**


Adapter	d <sub>1</sub>	LPR	BD	
		mm	mm	
HSK-A 63	MK1	100	25	01057
HSK-A 63	MK2	120	32	02057
HSK-A 63	MK3	140	40	03057
HSK-A 63	MK4	160	48	04057
HSK-A 100	MK2	120	32	02055
HSK-A 100	MK3	150	40	03055
HSK-A 100	MK4	170	48	04055

## Accessories

Morse taper adapter sleeve	Coolant transfer pipe	Others
→ 242	→ 156	→ 284

## HSK-T extension

- ▲ for mounting HSK-T adapters according to ISO 12164-3
- ▲ also suitable for HSK-A and HSK-C
- ▲ also available with Balluff chip **on request**

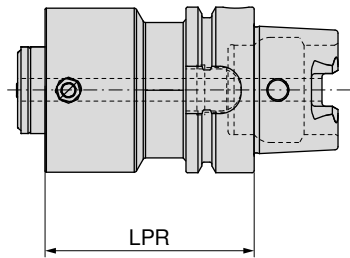


Adapter	LPR mm	84 621 ...
HSK-T 63	80	08037
HSK-T 63	120	12037
HSK-T 100	125	12535
HSK-T 100	160	16035
HSK-T 100	200	20035

## HSK-A reduction

- ▲ for mounting HSK-A adapters according to ISO 12164
- ▲ also available with Balluff chip **on request**

### Scope of supply:

with clamping cartridge and cover ring

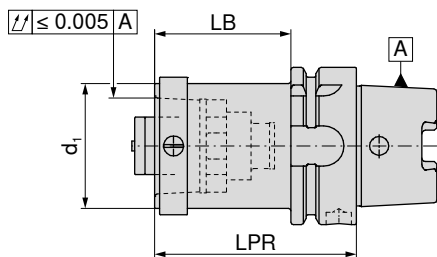


Adapter	d <sub>1</sub>	LB mm	LPR mm	84 040 ...
HSK-A 63	HSK-A 40	54	80	06359
HSK-A 63	HSK-A 50	54	80	06358
HSK-A 100	HSK-A 50	51	80	10058
HSK-A 100	HSK-A 63	71	100	10057

# HSK-A/PSC adapter

- ▲ for mounting PSC adapters according to ISO 26623-1
- ▲ also available with Balluff chip **on request**


**Scope of supply:**  
with tightening screw

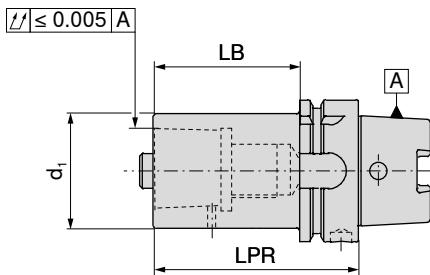

Adapter	d <sub>1</sub>	LB mm	LPR mm	84 013 ...
HSK-A 63	PSC 32	49	75	06387
HSK-A 63	PSC 40	54	80	06395
HSK-A 63	PSC 50	64	90	06394
HSK-A 100	PSC 32	51	80	10087
HSK-A 100	PSC 40	61	90	10095
HSK-A 100	PSC 50	71	100	10094
HSK-A 100	PSC 63	81	110	10093
HSK-A 100	PSC 80	91	120	10086


**Spare parts**  
d<sub>1</sub>

d <sub>1</sub>	84 950 ...	84 950 ...
PSC 32	127 SW8	122
PSC 40	128 SW8	123
PSC 50	129 SW10	124
PSC 63	130 SW14	126
PSC 80	130 SW14	126

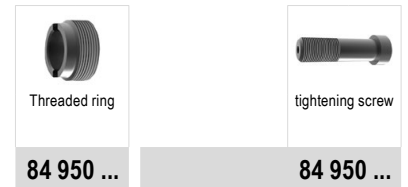

## Blank

- ▲ Material: 16MnCr5
- ▲ for production of special tools
- ▲ Taper hardened and ground
- ▲ Tool 27<sup>±1</sup> HRC
- ▲ also available with Balluff chip **on request**

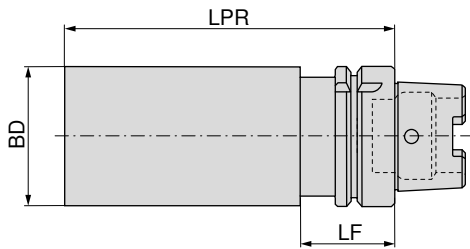


82 747 ...

Adapter	BD mm	LPR mm	LF mm	
HSK-A 63	63,0	200	42	16357
HSK-A 63	80,0	250	42	18057
HSK-A 100	63,0	200		16355
HSK-A 100	80,0	250		18055
HSK-A 100	97,5	250	45	19755

## Test arbor

Scope of supply:  
in wooden box

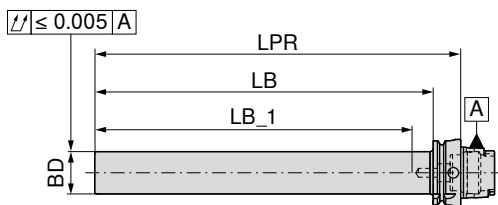

81 746 ...


Adapter	BD mm	LPR mm	LB_1 mm	LB mm	
HSK-A 63	40	346	300	320	063
HSK-A 100	40	349	300	320	100

# ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar

**Scope of supply:**

Holder **without** nut, **without** backstop

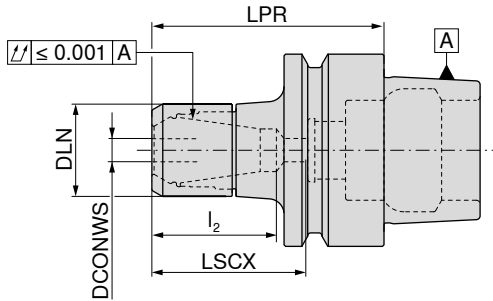

G 2,5  $n_{max}$  30000

**84 776 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ mm	for collet	
HSK-E 40	2 - 16	60	40	39		430E (ER25)	417
HSK-E 50	2 - 16	70	40	49	30 - 39	430E (ER25)	516

→ Transmittable torque moments, Page 313

**i** LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1  
 Dimension LPR when using tightening nuts with seals 4 mm longer

Lock nut IK	Lock nut
<b>84 950 ...</b>	<b>84 950 ...</b>
013	003

**Spare parts  
for collet**  
430E (ER25)

**Accessories**

ER collet	Sealing ring	Roll key	Roll key device	Coolant transfer pipe	Others
→ 268–276, 279	→ 280	→ 286	→ 286	→ 156	→ 284




# ER Precision tapered collet chuck – Centro-P

- ▲ for Mini Clamping Nuts
- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping
- ▲  $p_{max} = 80$  bar

### Scope of supply:

Holder **without** nut, **without** backstop

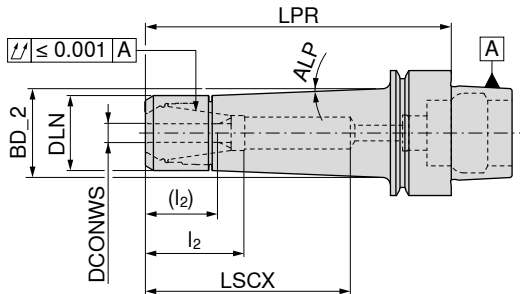

G 2,5  $n_{max}$  30000

**84 774 ...**

	Adapter	DCONWS mm	LPR mm	DLN mm	BD_2 mm	LSCX mm	$l_2$ ( $l_2$ ) mm	ALP	for collet	
short	HSK-E 25	1 - 7	35	16		22			4008E (ER11 mini)	<b>07200</b>
	HSK-E 32	1 - 7	50	16	17,5	31	18 - 20	4,5°	4008E (ER11 mini)	<b>307</b>
	HSK-E 40	1 - 7	50	16	17,5	31	18 - 20	4,5°	4008E (ER11 mini)	<b>407</b>
	HSK-E 25	1 - 10	45	22		30			426E (ER16 mini)	<b>101</b>
	HSK-E 32	1 - 10	55	22	25,8	40	28 - 32 (12 - 22)	4,5°	426E (ER16 mini)	<b>310</b>
	HSK-E 40	1 - 10	55	22	25,8	38	28 - 30 (12 - 20)	4,5°	426E (ER16 mini)	<b>410</b>
medium length	HSK-E 50	1 - 10	60	22	25,4	39	28 - 31 (12 - 21)	4,5°	426E (ER16 mini)	<b>510</b>
	HSK-E 40	1 - 7	100	16	25,4	64	18 - 36 (12 - 26)	4,5°	4008E (ER11 mini)	<b>408</b>
	HSK-E 40	1 - 10	100	22	29,0	66	28 - 48 (12 - 38)	2,5°	426E (ER16 mini)	<b>411</b>
	HSK-E 50	1 - 10	100	22	28,2	72	28 - 48 (12 - 38)	2,5°	426E (ER16 mini)	<b>511</b>

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer

### Spare parts

#### for collet

4008E (ER11 mini)										
426E (ER16 mini)										

<b>84 950 ...</b>	<b>84 950 ...</b>	<b>83 950 ...</b>	<b>83 950 ...</b>



### Accessories

ER collet	Sealing ring	Device	Roll key	Roll key device	Coolant transfer pipe	Others
→ 268-276, 279	→ 280	→ 285	→ 286	→ 286	→ 156	→ 284

# Shrink fit adapters

▲ for solid carbide and HSS shanks to h6 tolerance or better

TG

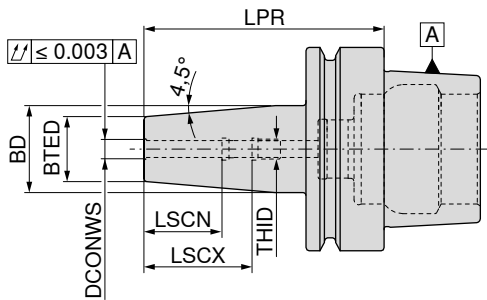

G 2,5 n<sub>max</sub> 25000 G 2,5 n<sub>max</sub> 25000

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID			
		mm	mm	mm	mm	mm	mm	mm			
short	HSK-E 40	3	60	10	15	28	12	M6	84 308 ...	103	
	HSK-E 40	4	60	10	15	28	16	M6			104
	HSK-E 40	5	60	10	15	30	20	M6			105
	HSK-E 40	6	80	21	27	36	26	M5			106
	HSK-E 40	8	80	21	27	36	26	M6			108
	HSK-E 40	10	80	24	32	41	31	M8x1			110
	HSK-E 40	12	90	24	32	47	37	M10x1			112
	HSK-E 40	14	90	27	34	47	37	M10x1			114
	HSK-E 40	16	90	27	34	50	40	M12x1			116
	HSK-E 50	3	80	10	15	22	12	M6			84 309 ...
	HSK-E 50	4	80	15	22	26	16	M6	104		
	HSK-E 50	5	80	15	22	30	20	M6	105		
	HSK-E 50	6	80	21	27	36	26	M5	106		
	HSK-E 50	8	80	21	27	36	26	M6	108		
	HSK-E 50	10	85	24	32	41	31	M8x1	110		
	HSK-E 50	12	90	24	32	47	37	M10x1	112		
	HSK-E 50	14	90	27	34	47	37	M10x1	114		
	HSK-E 50	16	95	27	34	50	40	M12x1	116		
	HSK-E 50	18	95	33	42	50	40	M12x1	118		
	HSK-E 50	20	100	33	42	52	42	M16x1	120		

→ Min. clamping depth, Page 312

Spare parts DCONWS	83 950 ...		83 950 ...		83 950 ...	
	M6x14 - SW2	417	M5x14 - SW2	411	M5x12,5 - SW2,5	418
3 - 5					M6x12,5 - SW3	419
6					M8x1x13,5 - SW3	420
8					M10x1x13,5 - SW5	421
10					M12x1x13,5 - SW5	422
12 - 14					M16x1x13,5 - SW5	423
16 - 18						
20						



1 Spare part 83 950 411 only for HSK-E 32. Spare part 83 950 417 for HSK-E 40/HSK-E 50.

## Coolant pipe – HSK

▲ use up to 100 bar

### Scope of supply:

complete, including seals




## Coolant transfer pipe with strainer – HSK

▲ 75 µ filter screen, usable up to 80 bar

### Scope of supply:

Complete, including sealing rings and filter screen



Adapter		THOD	83 760 ...
HSK 32	M10 x 1		
HSK 40	M12 x 1		040
HSK 50	M16 x 1		050
HSK 63	M18 x 1		063
HSK 80	M20 x 1,5		080
HSK 100	M24 x 1,5		100

Adapter		THOD	83 760 ...
HSK 63	M18 x 1		
HSK 100	M24 x 1,5		20000

NEW




For usage with micro tools with thro' coolant, improved tool life due to reduced contamination of the coolant hole

## Key – HSK




Adapter	83 758 ...
HSK 32	032
HSK 40	040
HSK 50	050
HSK 63	063
HSK 80	080
HSK 100	100

## Coolant pipe for HSK tools

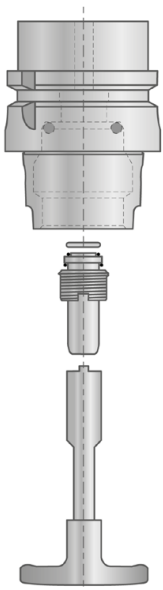

The coolant pipe is ideally mounted in vertical direction – from the bottom to the top. In this manner the sealing ring is prevented from being compressed during locating which would cause the loss of its sealing function. After mounting, the coolant pipe can be moved only to a minimum degree according to DIN ( $\pm 1^\circ$ ).




# ER Precision Collet chuck – Centro-P

- ▲ for standard or sealed nuts
- ▲ maximum size collet to ISO tolerance field H10
- ▲ for clamping a roll key is required
- ▲  $p_{max} = 80$  bar
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without nut, without backstop**

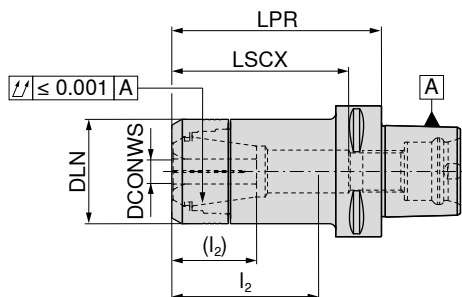

G 2,5  $n_{max}$  25000

**84 112 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	LSCX mm	$l_2$ ( $l_2$ ) mm	for collet	
PSC 40	1 - 10	55	30	47	29 - 38	426E (ER16)	402
PSC 50	1 - 10	60	30	47	29 - 38	426E (ER16)	501
PSC 50	1 - 10	100	30	87	29 - 51 (29 - 37)	426E (ER16)	502
PSC 50	1 - 16	60	40	48		430E (ER25)	505
PSC 50	2 - 20	60	50	49		470E (ER32)	507
PSC 63	1 - 10	60	30	44		426E (ER16)	601
PSC 63	1 - 10	100	30	83	29 - 53 (25 - 39)	426E (ER16)	602
PSC 63	1 - 16	60	40	38		430E (ER25)	605
PSC 63	1 - 16	100	40	78	36 - 62 (30 - 45)	430E (ER25)	606
PSC 63	1 - 16	130	40	99	34 - 70 (30 - 50)	430E (ER25)	607
PSC 63	1 - 16	160	40	118	34 - 70 (30 - 50)	430E (ER25)	608
PSC 63	2 - 20	60	50	42		470E (ER32)	609
PSC 63	2 - 20	100	50	79	45 - 63 (25 - 45)	470E (ER32)	610
PSC 63	2 - 20	130	50	99	45 - 63 (25 - 53)	470E (ER32)	611
PSC 63	3 - 26	65	63	51		472E (ER40)	612

→ Transmittable torque moments, Page 313



LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = With back stop screw 1, Dimension in brackets ( $l_2$ ) = With back stop screw 2  
 Dimension LPR when using tightening nuts with seals 4 mm longer


Spare parts for collet	Lock nut IK	Lock nut	Stop screw 2	Stop screw 1
	84 950 ...	84 950 ...	83 950 ...	83 950 ...
426E (ER16)	011	001	M11x1 - SW6 341	M11x1 - SW6 337
430E (ER25)	013	003	M18x1,5 - SW6 432	M18x1,5 - SW6 431
470E (ER32)	015	005	M22x1,5 - SW6 402	M22x1,5 - SW6 401
472E (ER40)	017	007		M28x1,5 - SW6 400

# HyPower – Complus

- ▲ High pressure chuck, short and stable version
- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Base body with backstop screw and pressure screw

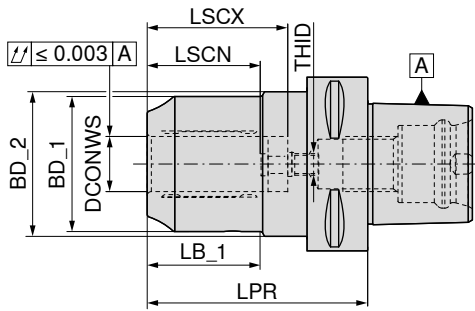


G 2,5 n<sub>max</sub> 25000

**84 108 ...**

Adapter	DCONWS	LPR	LB_1	BD_1	BD_2	LSCX	LSCN	THID
	mm	mm	mm	mm	mm	mm	mm	
PSC 63	20	80	41	49	52,5	51	41	M8x1

**62000**

→ Min. clamping depth, Page 312




Cylindrical screw

**83 950 ...**



Clamping key - T

**80 397 ...**



Pressure screw

**83 950 ...**



Stop screw IK

**83 950 ...**

### Spare parts for Article no.

84 108 62000	M5x5 - SW2,5	<b>157</b>	SW5	<b>050</b>	M10x1x14	<b>429</b>	M16x1x13,5 - SW8	<b>424</b>
--------------	--------------	------------	-----	------------	----------	------------	------------------	------------

### Accessories

Reduction sleeve	Coolant transfer pipe	Others
→ 282	→ 176	→ 284


# Shrink adapters

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without** IK back stop screw

TG

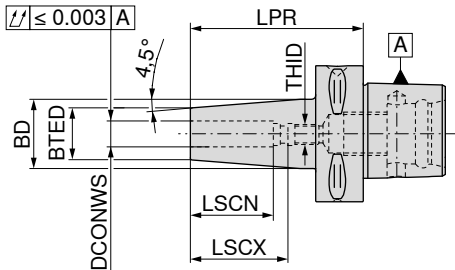

G 6,3 n<sub>max</sub> 15000

84 104 ...

Adapter	LPR	DCONWS	BTED	BD	LSCX	LSCN	THID	
	mm	mm	mm	mm	mm	mm		
PSC 32	65	6	21	27	36	26	M5	306
PSC 32	65	8	21	27	36	26	M6	308
PSC 32	70	10	24	32	41	31	M8x1	310
PSC 32	75	12	24	32	47	37	M10x1	312
PSC 40	75	6	21	27	36	26	M5	406
PSC 40	75	8	21	27	36	26	M6	408
PSC 40	75	10	24	32	41	31	M8x1	410
PSC 40	75	12	24	32	47	37	M10x1	412
PSC 40	80	14	27	34	47	37	M10x1	414
PSC 40	80	16	27	34	50	40	M12x1	416
PSC 40	80	18	33	42	50	40	M12x1	418
PSC 40	85	20	33	42	52	42	M16x1	420
PSC 50	65	3	12	17				503
PSC 50	65	4	12	17				504
PSC 50	65	5	12	17				505
PSC 50	75	6	21	30	36	26	M5	506
PSC 50	75	8	21	30	36	26	M6	508
PSC 50	75	10	24	33	41	31	M8x1	510
PSC 50	75	12	24	33	47	37	M10x1	512
PSC 50	80	14	27	34	47	37	M10x1	514
PSC 50	80	16	27	34	50	40	M12x1	516
PSC 50	80	18	33	42	50	40	M12x1	518
PSC 50	85	20	33	42	52	42	M16x1	520
PSC 50	90	25	44	53	58	48	M16x1	525
PSC 63	80	3	12	17				603
PSC 63	80	4	12	17				604
PSC 63	80	5	12	17				605
PSC 63	80	6	21	27	36	26	M5	606
PSC 63	80	8	21	27	36	26	M6	608
PSC 63	80	10	24	32	41	31	M8x1	610
PSC 63	80	12	24	32	47	37	M10x1	612
PSC 63	85	14	27	34	47	37	M10x1	614
PSC 63	85	16	27	34	50	40	M12x1	616
PSC 63	85	18	33	42	50	40	M12x1	618
PSC 63	85	20	33	42	52	42	M16x1	620
PSC 63	90	25	44	53	58	48	M16x1	625
PSC 63	95	32	44	53	61	51	M16x1	632
PSC 80	85	6	21	27	36	26	M5	806
PSC 80	85	8	21	27	36	26	M6	808
PSC 80	85	10	24	32	41	31	M8x1	810
PSC 80	85	12	24	32	47	37	M10x1	812
PSC 80	90	14	27	34	47	37	M10x1	814
PSC 80	90	16	27	34	50	40	M12x1	816
PSC 80	90	18	33	42	50	40	M12x1	818
PSC 80	90	20	33	42	52	42	M16x1	820
PSC 80	95	25	44	53	58	48	M16x1	825
PSC 80	100	32	44	53	61	51	M16x1	832

→ Min. clamping depth, Page 312


# Shrink adapters

- ▲ for solid carbide and HSS shanks with h6 tolerance or better
- ▲ also available with Balluff chip **on request**

### Scope of supply:

Holder **without** IK back stop screw

**TG**

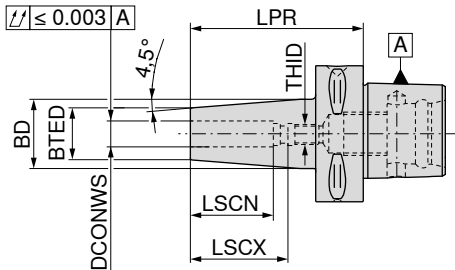

G 6,3 n<sub>max</sub> 15000

G 6,3 n<sub>max</sub> 15000

	Adapter	LPR mm	DCONWS mm	BTED mm	BD mm	LSCX mm	LSCN mm	THID	G 6,3 n <sub>max</sub> 15000		
									84 105 ...	84 106 ...	
medium length	PSC 50	120	6	21	32	36	26	M5	506		
	PSC 50	120	8	21	32	36	26	M6	508		
	PSC 50	120	10	24	34	41	31	M8x1	510		
	PSC 50	120	12	24	34	47	37	M10x1	512		
	PSC 50	120	14	27	36	47	37	M10x1	514		
	PSC 50	120	16	27	36	50	40	M12x1	516		
	PSC 50	120	18	33	42	50	40	M12x1	518		
	PSC 50	120	20	33	42	52	42	M16x1	520		
	PSC 50	120	25	44	53	58	48	M16x1	525		
	PSC 63	120	6	21	32	36	26	M5	606		
	PSC 63	120	8	21	32	36	26	M6	608		
	PSC 63	120	10	24	32	41	31	M8x1	610		
	PSC 63	120	12	24	32	47	37	M10x1	612		
	PSC 63	120	14	27	36	47	37	M10x1	614		
	PSC 63	120	16	27	36	50	40	M12x1	616		
	PSC 63	120	18	33	44	50	40	M12x1	618		
	PSC 63	120	20	33	44	52	42	M16x1	620		
	PSC 63	120	25	44	53	58	48	M16x1	625		
PSC 63	120	32	44	53	61	51	M16x1	632			
	PSC 80	120	6	21	32	36	26	M5	806		
	PSC 80	120	8	21	32	36	26	M6	808		
	PSC 80	120	10	24	34	41	31	M8x1	810		
	PSC 80	120	12	24	34	47	37	M10x1	812		
	PSC 80	120	14	27	36	47	37	M10x1	814		
	PSC 80	120	16	27	36	50	40	M12x1	816		
	PSC 80	120	18	33	44	50	40	M12x1	818		
	PSC 80	120	20	33	44	52	42	M16x1	820		
	PSC 80	120	25	44	53	58	48	M16x1	825		
	PSC 80	120	32	44	53	61	51	M16x1	832		
	extra-long	PSC 63	160	6	21	32	36	26	M5		606
		PSC 63	160	8	21	32	36	26	M6		608
PSC 63		160	10	24	34	41	31	M8x1		610	
PSC 63		160	12	24	34	47	37	M10x1		612	
PSC 63		160	14	27	36	47	37	M10x1		614	
PSC 63		160	16	27	36	50	40	M12x1		616	
PSC 63		160	18	33	44	50	40	M12x1		618	
PSC 63		160	20	33	44	52	42	M16x1		620	
PSC 63		160	25	44	53	58	48	M16x1		625	
PSC 63		160	32	44	53	61	51	M16x1		632	

→ Min. clamping depth, Page 312

## Spare parts heat shrink adapter



Backstop screw IK

84 950 ...

**Spare parts**


**DCONWS**

6	140
8	141
10	142
12 - 14	143
16 - 18	144
20 - 32	145



# Cylindrical shank adapter (Weldon)

- ▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat
- ▲ also available with Balluff chip on request

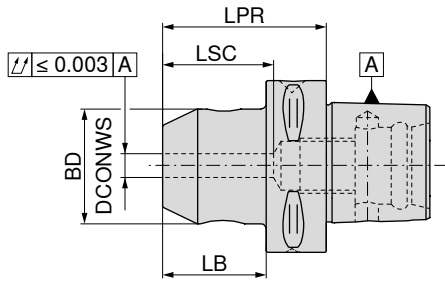

G 6,3 n<sub>max</sub> 15000


**84 100 ...**

Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	
PSC 32	6	45	25	30	35	306
PSC 32	8	45	28	30	35	308
PSC 32	10	50	35	35	39	310
PSC 32	12	55	42	40	44	312
PSC 40	6	50	25	30	35	406
PSC 40	8	50	28	30	35	408
PSC 40	10	50	35	30	39	410
PSC 40	12	55	42	35	44	412
PSC 40	14	55	44	35	44	414
PSC 40	16	55	48	35	47	416
PSC 50	6	50	25	30	35	506
PSC 50	8	50	28	30	35	508
PSC 50	10	55	35	35	39	510
PSC 50	12	60	42	40	44	512
PSC 50	14	60	44	40	44	514
PSC 50	16	60	48	40	47	516
PSC 50	18	60	50	40	47	518
PSC 50	20	60	52	40	47	520
PSC 50	25	80	65	60	54	525 <sup>1)</sup>
PSC 63	6	55	25	33	35	606
PSC 63	8	55	28	33	35	608
PSC 63	10	60	35	38	39	610
PSC 63	12	60	42	38	44	612
PSC 63	14	60	44	38	44	614
PSC 63	16	65	48	43	47	616
PSC 63	18	65	50	43	47	618
PSC 63	20	65	52	43	49	620
PSC 63	25	80	65	58	54	625 <sup>1)</sup>
PSC 63	32	90	72	68	58	632 <sup>1)</sup>
PSC 63	40	100	80	78	75	640 <sup>1)</sup>
PSC 80	6	70	25	40	35	806
PSC 80	8	70	28	40	35	808
PSC 80	10	70	35	40	39	810
PSC 80	12	70	42	40	44	812
PSC 80	14	70	44	40	44	814
PSC 80	16	70	48	50	47	816
PSC 80	18	70	50	40	47	818
PSC 80	20	70	52	40	49	820
PSC 80	25	80	65	50	54	825 <sup>1)</sup>
PSC 80	32	80	72	50	58	832 <sup>1)</sup>
PSC 80	40	110	80	80	75	840 <sup>1)</sup>
PSC 80	50	120	100	90	83	850 <sup>1)</sup>

1) Version with two grub screws

# Cylindrical Shank Adapter (Whistle Notch)

- ▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat
- ▲ also available with Balluff chip on request

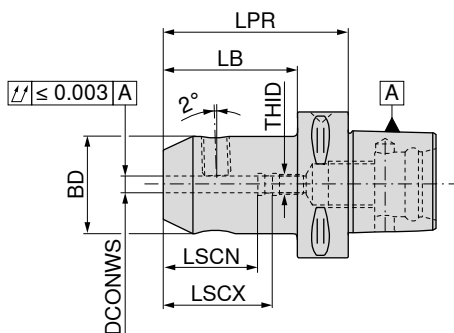

G 6,3 n<sub>max</sub> 15000

84 102 ...

Adapter	DCONWS	LPR	BD	LB	LSCN	LSCX	THID	
	mm	mm	mm	mm	mm	mm	mm	
PSC 32	6	70	25	55	38	28	M5	306
PSC 32	8	70	28	55	38	28	M6	308
PSC 32	10	70	35	55	41	31	M8	310
PSC 32	12	75	42	60	47	37	M10	312
PSC 40	6	70	25	50	38	28	M5	406
PSC 40	8	70	28	50	38	28	M6	408
PSC 40	10	70	35	50	41	31	M8	410
PSC 40	12	75	42	55	47	37	M10	412
PSC 40	14	75	44	55	47	37	M10	414
PSC 50	6	70	25	50	38	28	M5	506
PSC 50	8	70	28	50	38	28	M6	508
PSC 50	10	70	35	50	41	31	M8	510
PSC 50	12	75	42	55	47	37	M10	512
PSC 50	14	75	44	55	47	37	M10	514
PSC 50	16	80	48	60	50	40	M12	516
PSC 50	18	80	50	60	50	40	M12	518
PSC 50	20	85	52	65	52	42	M16	520
PSC 63	6	75	25	53	38	28	M5	606
PSC 63	8	75	28	53	38	28	M6	608
PSC 63	10	75	35	53	41	31	M8	610
PSC 63	12	80	42	58	47	37	M10	612
PSC 63	14	80	44	58	47	37	M10	614
PSC 63	16	80	48	58	50	40	M12	616
PSC 63	18	80	50	58	50	40	M12	618
PSC 63	20	85	52	63	52	42	M16	620
PSC 63	25	90	65	68	58	48	M16	625 <sup>1)</sup>
PSC 63	32	95	72	73	61	51	M16	632 <sup>1)</sup>
PSC 80	6	65	25	35	38	28	M5	806
PSC 80	8	65	28	35	38	28	M6	808
PSC 80	10	65	35	35	41	31	M8	810
PSC 80	12	70	42	40	47	37	M10	812
PSC 80	14	70	44	40	47	37	M10	814
PSC 80	16	75	48	45	50	40	M12	816
PSC 80	18	75	50	45	50	40	M12	818
PSC 80	20	80	52	50	52	42	M16	820
PSC 80	25	90	65	60	58	48	M16	825 <sup>1)</sup>
PSC 80	32	95	72	65	61	51	M16	832 <sup>1)</sup>

1) Version with two grub screws




62 950 ...

84 950 ...

Spare parts				
DCONWS				
6	M6x10	006	M5	146
8	M8x10	008	M6	147
10	M10x12	010	M8	148
12 - 14	M12x16	012	M10	149
16 - 18	M14x16	016	M12	150
20	M16x16	020	M16	151
25	M18x2x20	025	M16	151
32	M20x2x20	032	M16	151

# Indexable insert drill adapter ISO 26623-1 PSC

- ▲ Run-out ≤ 0.005 mm
- ▲ max. speed 5,000 rpm
- ▲ Also available with Balluff chip **on request**

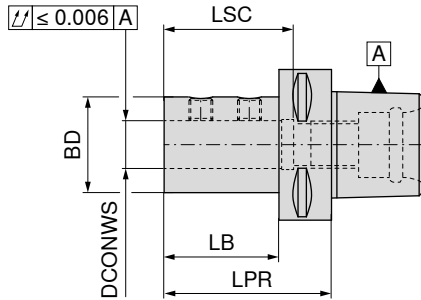

84 128 ...

Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	
PSC 32	16	60	36	45	49	316
PSC 32	20	60	40	45	54	320
PSC 40	16	60	36	40	49	416
PSC 40	20	60	40	40	54	420
PSC 40	25	70	45	50	59	425
PSC 50	16	65	36	45	49	516
PSC 50	20	65	40	45	54	520
PSC 50	25	70	45	50	59	525
PSC 50	32	75	52	55	63	532
PSC 63	16	70	36	48	49	616
PSC 63	20	70	40	48	54	620
PSC 63	25	75	45	53	59	625
PSC 63	32	75	52	53	63	632
PSC 63	40	85	65	63	73	640
PSC 63	50	115	75	93	83	650
PSC 80	16	80	36	50	49	816
PSC 80	20	80	40	50	54	820
PSC 80	25	85	45	55	59	825
PSC 80	32	90	52	60	63	832
PSC 80	40	95	65	65	73	840
PSC 80	50	100	75	70	83	850




83 950 ...

**Spare parts**

DCONWS		
16 - 20	M10x1x10	180
25 - 32	M12x1x12	181
40 - 50	M16x1x13	182

# ER Collet chuck

▲ also available with Balluff chip on request

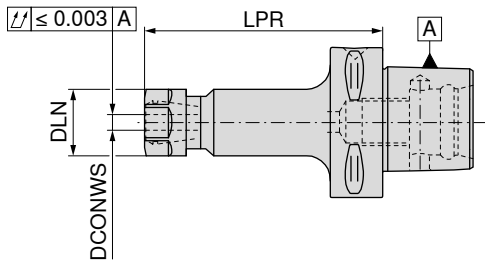

G 6,3 n<sub>max</sub> 15000

**84 114 ...**

Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	
PSC 32	1 - 10	45	28	8 - 56	426E (ER16)	304
PSC 40	1 - 10	55	28	8 - 56	426E (ER16)	404
PSC 50	1 - 10	60	28	8 - 56	426E (ER16)	504
PSC 50	1 - 10	100	28	8 - 56	426E (ER16)	506
PSC 63	1 - 10	60	28	8 - 56	426E (ER16)	604
PSC 63	1 - 10	100	28	8 - 56	426E (ER16)	606
PSC 80	1 - 10	100	28	8 - 56	426E (ER16)	806
PSC 80	1 - 10	60	28	8 - 56	426E (ER16)	804



Lock nut

**62 950 ...**

### Spare parts for collet

426E (ER16)

M22x1,5 - SW25

**044**

### Accessories




ER collet

→ 268-276, 279

# ER Collet chuck

▲ also available with Balluff chip on request

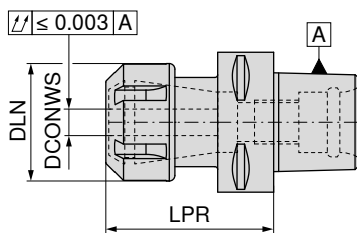

G 6,3 n<sub>max</sub> 15000

84 115 ...

Adapter	DCONWS mm	LPR mm	DLN mm	TQX Nm	for collet	
PSC 32	1 - 13	45	34	16 - 80	428E (ER20)	306 <sup>1)</sup>
PSC 40	1 - 13	55	34	16 - 80	428E (ER20)	404 <sup>1)</sup>
PSC 40	1 - 16	55	42	24 - 104	430E (ER25)	406
PSC 40	2 - 20	55	50	24 - 136	470E (ER32)	408
PSC 50	1 - 13	60	34	16 - 80	428E (ER20)	502 <sup>1)</sup>
PSC 50	1 - 13	100	34	16 - 80	428E (ER20)	504 <sup>1)</sup>
PSC 50	1 - 16	60	42	24 - 104	430E (ER25)	506
PSC 50	1 - 16	100	42	24 - 104	430E (ER25)	508
PSC 50	2 - 20	60	50	24 - 136	470E (ER32)	510
PSC 50	2 - 20	100	50	24 - 136	470E (ER32)	512
PSC 50	3 - 26	65	63	176	472E (ER40)	514
PSC 50	3 - 26	100	63	176	472E (ER40)	516
PSC 63	1 - 13	60	34	16 - 80	428E (ER20)	602 <sup>1)</sup>
PSC 63	1 - 13	100	34	16 - 80	428E (ER20)	604 <sup>1)</sup>
PSC 63	1 - 16	60	42	24 - 104	430E (ER25)	606
PSC 63	1 - 16	100	42	24 - 104	430E (ER25)	608
PSC 63	2 - 20	60	50	24 - 136	470E (ER32)	610
PSC 63	2 - 20	100	50	24 - 136	470E (ER32)	612
PSC 63	3 - 26	65	63	176	472E (ER40)	614
PSC 63	3 - 26	100	63	176	472E (ER40)	616
PSC 80	1 - 13	65	34	16 - 80	428E (ER20)	802 <sup>1)</sup>
PSC 80	1 - 13	100	34	16 - 80	428E (ER20)	804 <sup>1)</sup>
PSC 80	1 - 16	70	42	24 - 104	430E (ER25)	806
PSC 80	1 - 16	100	42	24 - 104	430E (ER25)	808
PSC 80	2 - 20	70	50	24 - 136	470E (ER32)	810
PSC 80	2 - 20	100	50	24 - 136	470E (ER32)	812
PSC 80	3 - 26	80	63	176	472E (ER40)	814
PSC 80	3 - 26	100	63	176	472E (ER40)	816

1) with 6 position lock nut

Dimension LPR is 5.0 mm longer for ER16, ER25 and ER32, and 5.5 mm for ER40 when using thro' coolant lock nuts

Spare parts for collet	62 950 ...		83 950 ...		62 950 ...		83 357 ...	
	Lock nut	045	Lock nut IK	053	Lock nut	055	Y clamping key	12000
428E (ER20)	M25x1,5 - SW30		M25x1,5		M32x1,5			125
430E (ER25)			M32x1,5	055	M40x1,5	65600		132
470E (ER32)			M40x1,5	056	M50x1,5	65700		140
472E (ER40)			M50x1,5	057				

### Accessories




# Short drill chuck – NC 2010

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm
- ▲ also available with Balluff chip **on request**

**Scope of supply:**

Toolholder including clamping key SW4

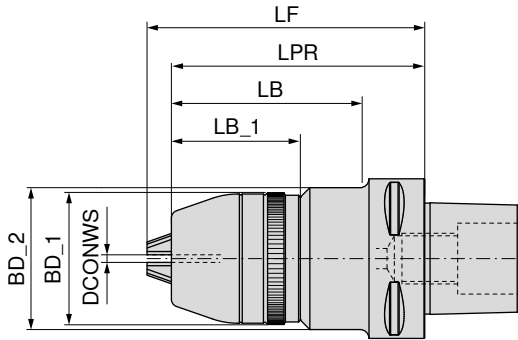

G 2,5 n<sub>max</sub> 12000

**84 111 ...**

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LB_1 mm	LB mm	LPR mm	LF mm	
PSC 40	0,5 - 13	48,5	56	50,90	78,0	100	109,0	<b>01395</b>
PSC 40	2,5 - 16	51,0	56	52,15	78,0	100	110,5	<b>01695</b>
PSC 50	0,5 - 13	48,5	56	50,90	77,0	100	109,0	<b>01394</b>
PSC 50	2,5 - 16	51,0	56	52,15	77,0	100	110,5	<b>01694</b>
PSC 63	0,5 - 13	48,5	56	50,90	74,5	100	109,0	<b>01393</b>
PSC 63	2,5 - 16	51,0	56	52,15	74,5	100	110,5	<b>01693</b>

Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

**Accessories**




Others

→ 284

## Synchronised quick change tap chuck with minimal length compensation

- ▲ For collets according to DIN 6499
- ▲ With length compensation under tension and under compression (LZD)
- ▲  $p_{max.} = 50$  bar
- ▲ also available with Balluff chip **on request**

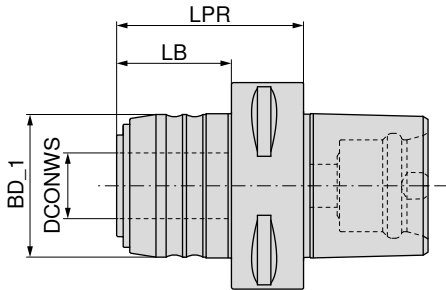

84 140 ...


Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LB mm	LZD± mm	
PSC 63	M3 - M12	1	57	43	20	35	1,0 / 0,2	612
PSC 63	M6 - M20	2	77	60	32	55	1,0 / 0,2	620

## Insert for synchro quick change tapping chuck with minimum length compensation

- ▲ SZID = for insert size

### Scope of supply:

Includes lock nut

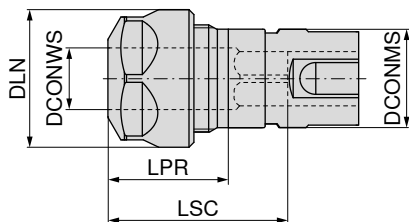

83 608 ...

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm	
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20	012 <sup>1)</sup>
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32	020


1) with 6 position lock nut

## Spare parts insert for synchro quick change tapping chuck with minimum length compensation

Spare parts for Article no.		62 950 ...		83 950 ...		62 950 ...		83 357 ...	
		Lock nut	Lock nut IK	Lock nut	Y clamping key				
83 608 012	M22x1,5 - SW25	044	M22x1,5	054	M22x1,5	054		116	
83 608 020			M32x1,5	055	M32x1,5	055		125	

## Quick change tap chuck with length compensation

- ▲ With length compensation under tension and compression (LZD)
- ▲ also available with Balluff chip **on request**

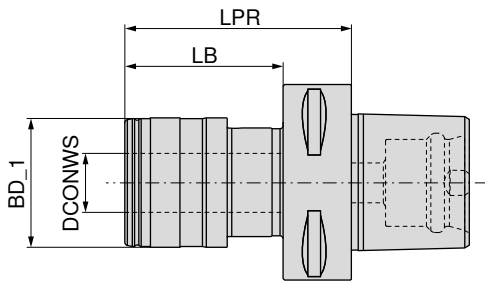

Adapter	cutting range	SZID	LPR	BD_1	DCONWS	LB	LZD±	84 142 ...
			mm	mm	mm	mm	mm	
PSC 63	M3 - M12	01	73	41	19	51	7,5	612
PSC 63	M6 - M20	02	97	60	31	75	10	620

### Accessories




Collet

→ 288-292




# Adapter with ABS Connection

▲ also available with Balluff chip on request

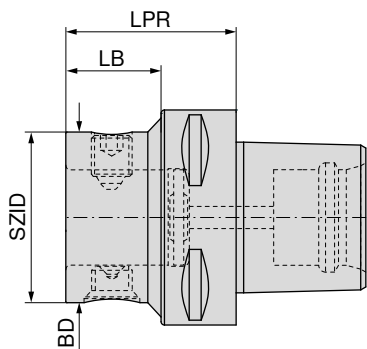


Adapter	KOMET no.	SZID	BD	LPR	LB	84 215 ...
			mm	mm	mm	
PSC 40	A69 04050	ABS 50	50	50	30	04097
PSC 50	A69 05050	ABS 50	50	50	30	05097
PSC 63	A69 06050	ABS 50	50	50	28	06397
PSC 63	A69 06060	ABS 63	63	60	36	06396
PSC 80	A69 08050	ABS 50	50	50	23	08097
PSC 80	A69 08060	ABS 63	63	60	30	08096
PSC 80	A69 08070	ABS 80	80	80	50	08092



Clamping screw

84 950 ...



Taper screw


84 950 ...

Spare parts

SZID	20300	20400
ABS 50	20300	20400
ABS 63	25500	27300
ABS 80	25600	25100


# Torsional vibration damper with ABS connection

▲ also available with Balluff chip on request

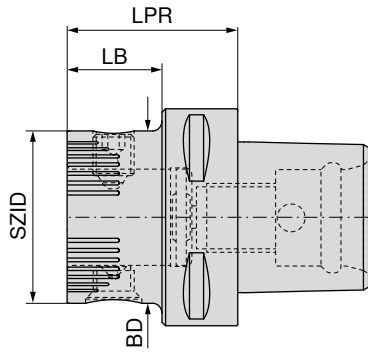


84 206 ...

Adapter	KOMET no.	SZID	BD mm	LPR mm	LB mm	
PSC 50	A69 05060	ABS 50	50	50	30	05094
PSC 63	A69 06070	ABS 50	50	50	28	05093
PSC 63	A69 06080	ABS 63	63	60	38	06393
PSC 80	A69 08090	ABS 50	50	50	23	05086
PSC 80	A69 08100	ABS 63	63	60	30	06386
PSC 80	A69 08110	ABS 80	80	80	50	08086



84 950 ...



84 950 ...

### Spare parts


SZID		
ABS 50	20300	20400
ABS 63	25500	27300
ABS 80	25600	25100

### Accessories



# Adapter for screw-in milling cutter

▲ also available with Balluff chip on request

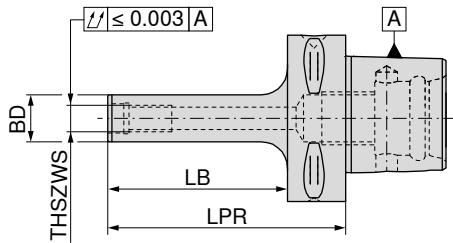

G 2,5 n<sub>max</sub> 20000

84 110 ...

Adapter	THSZWS	LPR mm	BD mm	LB mm	
PSC 32	M8	60	13	45	302
PSC 32	M10	70	18	55	306
PSC 40	M8	70	13	50	402
PSC 40	M10	80	18	60	405
PSC 40	M12	80	21	60	408
PSC 50	M8	70	13	50	502
PSC 50	M10	80	18	60	505
PSC 50	M12	80	21	60	508
PSC 50	M16	80	29	60	512
PSC 63	M8	70	13	48	602
PSC 63	M10	90	18	68	605
PSC 63	M12	100	21	78	608
PSC 63	M16	100	29	78	612

## Accessories



Coolant transfer pipe


→ 176

# Shell mill adapters

- ▲ for cutters with longitudinal or transverse groove
- ▲ also available with Balluff chip on request

### Scope of supply:

Holder with clamping screw and drive key

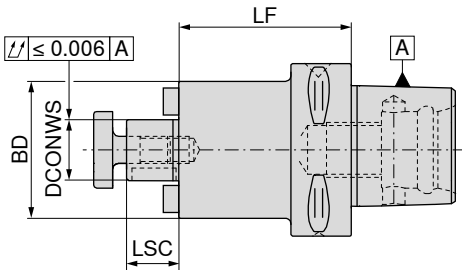

G 6,3 n<sub>max</sub> 15000

**84 122 ...**

Adapter	DCONWS mm	LF mm	BD mm	LSC mm	
PSC 40	16	28	40	17	401
PSC 40	16	63	40	17	402
PSC 40	22	40	50	19	411
PSC 40	22	63	50	19	412
PSC 50	16	28	40	17	501
PSC 50	16	63	40	17	502
PSC 50	22	28	50	19	511
PSC 50	22	63	50	19	512
PSC 50	27	32	50	21	521
PSC 50	27	63	50	21	522
PSC 50	32	40	63	24	531
PSC 50	32	63	63	24	532
PSC 63	16	63	40	17	602
PSC 63	22	28	63	19	611
PSC 63	22	63	50	19	612
PSC 63	27	28	58	21	621
PSC 63	27	63	58	21	622
PSC 63	32	22	63	24	631
PSC 63	32	86	63	24	632
PSC 63	40	40	70	27	641
PSC 80	16	63	40	17	802
PSC 80	22	30	50	19	811
PSC 80	22	63	50	19	812
PSC 80	27	30	58	21	821
PSC 80	27	63	58	21	822
PSC 80	32	30	63	24	831
PSC 80	32	86	63	24	832
PSC 80	40	40	70	27	841


drive key	drive dog	Cross nut key	Cross screw	clamping screw
<b>84 950 ...</b>	<b>84 950 ...</b>	<b>83 368 ...</b>	<b>83 367 ...</b>	<b>83 950 ...</b>

### Spare parts

DCONWS	108	113	116	M8	016	M8x25	113
16	108	113	116	M8	016	M8x25	113
22	109	114	122	M10	022	M10x25	124
27	110	115	127	M12	027	M12x30	125
32	111	116	132	M16	032	M16x35	126
40	112	117	140	M20	040	M20x40 - SW17	112

# Taper sleeve DIN 6383 for DIN 228-2D Morse taper shanks

▲ also available with Balluff chip on request

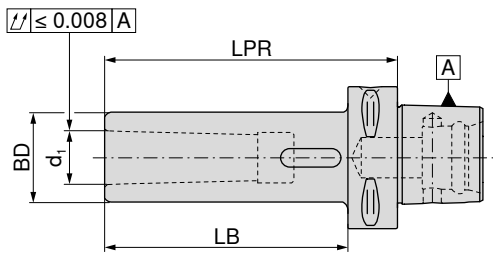


84 126 ...

Adapter	d <sub>1</sub>	LPR mm	BD mm	LB mm	
PSC 40	MK2	110	32	90	402
PSC 40	MK3	130	40	119	403
PSC 50	MK2	110	32	90	502
PSC 50	MK3	130	40	110	503
PSC 50	MK4	150	48	132	504
PSC 63	MK2	110	32	88	602
PSC 63	MK3	130	40	108	603
PSC 63	MK4	150	48	128	604
PSC 80	MK2	120	32	90	802
PSC 80	MK3	140	40	110	803
PSC 80	MK4	160	48	130	804

# Blank

- ▲ Material: 25CrMoV4
- ▲ for production of special tools
- ▲ Taper hardened and ground
- ▲ Special tool area in soft state
- ▲ also available with Balluff chip **on request**

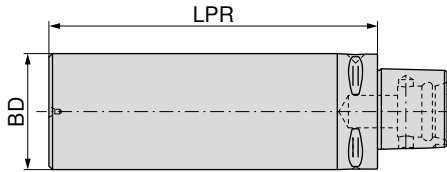


84 134 ...

Adapter	BD mm	LPR mm	
PSC 40	40	95	402
PSC 40	40	120	403
PSC 40	60	165	404
PSC 40	80	75	405
PSC 40	80	120	406
PSC 40	100	85	408
PSC 50	50	125	502
PSC 50	50	150	503
PSC 50	75	175	504
PSC 50	90	80	506
PSC 50	95	150	508
PSC 50	110	90	510
PSC 63	63	180	602
PSC 63	75	195	604
PSC 63	110	85	606
PSC 63	120	180	608
PSC 63	130	95	610
PSC 80	80	200	802
PSC 80	120	160	804
PSC 80	130	90	806
PSC 80	145	200	808

## Test bar

▲ also available with Balluff chip on request

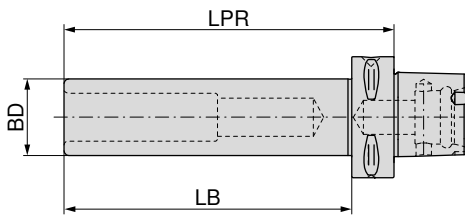

84 136 ...

Adapter	LPR mm	BD mm	LB mm
PSC 32	175	25	160
PSC 40	180	25	160
PSC 50	235	32	215
PSC 63	322	40	300
PSC 80	330	40	300

030  
040  
050  
060  
080

## Coolant pipe – PSC

Scope of supply:

complete, including seals



84 116 ...


Adapter	THOD	
PSC 40	M14 x 1,5	04000
PSC 50	M16 x 1,5	05000
PSC 63	M20 x 2,0	06300
PSC 80	M20 x 2,0	08000

## Pull stud for PSC adapter

▲ for front clamping

Scope of supply:

including O-Ring



NEW

83 235 ...

Adapter	LF mm	OAL mm	BD mm	CRKS	
PSC 40	26,3	56	20	M14x1,5	04000
PSC 50	33,0	69	25	M16x1,5	05000
PSC 63	33,0	79	31	M20x2	06300

## Key – PSC



84 117 ...


Adapter	
PSC 40	04000
PSC 50	05000
PSC 63	06300
PSC 80	08000

# HyTens – Fit

- ▲ Hydraulic chuck with ABS connection
- ▲ for solid carbide and HSS shanks to h6 tolerance or better

### Scope of supply:

Base body including backstop screw

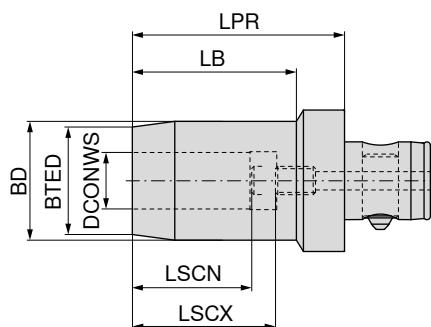

NEW



84 253 ...

Adapter	DCONWS mm	BTED mm	BD mm	LPR mm	LB mm	LSCX mm	LSCN mm	
ABS 40	6	22	26	55	36,5	37	27	00688
ABS 40	8	24	28	60	42,0	37	27	00888
ABS 40	10	26	30	65	47,5	41	31	01088
ABS 40	12	28	32	65	48,0	46	36	01288
ABS 50	6	22	26	55	33,5	37	27	00697
ABS 50	8	24	28	55	34,0	37	27	00897
ABS 50	10	26	30	65	45,0	41	31	01097
ABS 50	12	28	32	65	45,5	46	36	01297
ABS 50	14	30	34	65	46,0	46	36	01497
ABS 50	16	34	38	70	52,0	49	39	01697
ABS 50	18	36	40	70	52,5	49	39	01897
ABS 50	20	38	42	75	58,0	51	41	02097
ABS 63	20	38	42	78	56,0	51	41	02096
ABS 63	25	53	57	85	60,0	57	47	02596
ABS 63	32	60	64	90	61,0	61	51	03296



Stop screw IK

83 950 ...

### Spare parts


DCONWS		
6	M5x12,5 - SW2,5	418
8	M6x12,5 - SW3	419
10	M8x1x13,5 - SW3	420
12	M10x1x13,5 - SW5	421
14	M10x1x13,5 - SW5	421
16	M10x1x13,5 - SW5	421
18	M10x1x13,5 - SW5	421
20	M16x1x13,5 - SW5	423
25	M16x1x13,5 - SW5	423
32	M16x1x13,5 - SW5	423

For an overview of the ABS spare parts, take a look at **page 314**.



# Shrink fit adapters 4.5°

▲ for solid carbide and HSS shanks to h6 tolerance or better

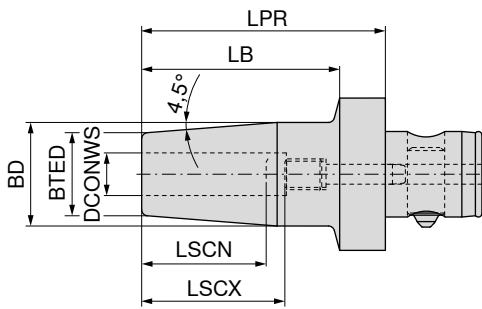

G 6,3 n<sub>max</sub> 15000

**84 222 ...**

Adapter	KOMET no.	DCONWS mm	LPR mm	BD mm	BTED mm	LB mm	LSCX mm	LSCN mm	
ABS 32	A32 26040	6	70	27	21	56	36	26	00689
ABS 32	A32 26050	8	70	27	21	56	36	26	00889
ABS 32	A32 26061	10	70	32	24	56	42	32	01089
ABS 32	A32 26071	12	80	32	24	66	47	37	01289
ABS 40	A32 36050	8	70	27	21	56	36	26	00888
ABS 40	A32 36061	10	70	32	24	56	42	32	01088
ABS 40	A32 36071	12	80	32	24	66	47	37	01288
ABS 40	A32 36091	16	90	34	27	76	50	40	01688
ABS 50	A32 46040	6	75	27	21	56	36	26	00697
ABS 50	A32 46050	8	75	27	21	56	36	26	00897
ABS 50	A32 46061	10	80	32	24	61	42	32	01097
ABS 50	A32 46071	12	80	32	24	61	47	37	01297
ABS 50	A32 46081	14	80	34	27	61	47	37	01497
ABS 50	A32 46091	16	85	34	27	66	50	40	01697
ABS 50	A32 46101	18	85	42	33	66	50	40	01897
ABS 50	A32 46111	20	90	42	33	71	52	42	02097
ABS 63	A32 56111	20	90	42	33	71	52	42	02096
ABS 63	A32 56121	25	95	53	44	76	58	48	02596
ABS 63	A32 56131	32	95	53	44	76	58	48	03296



Backstop screw

**84 950 ...**


**Spare parts**  
**DCONWS**

6	M5x18	21400
8	M6x20	21500
10	M8x1x20	21600
12	M10x1x20	21700
14	M10x1x20	21700
16	M12x1x20	21800
18	M12x1x20	21800
20	M8x1x20	21900
25	M8x1x20	21900
32	M8x1x20	21900

For an overview of the ABS spare parts, take a look at **page 314**.

# Cylindrical shank adapter (Weldon)

▲ For shanks according to DIN 6535 HB / 1835 B with lateral clamping flat

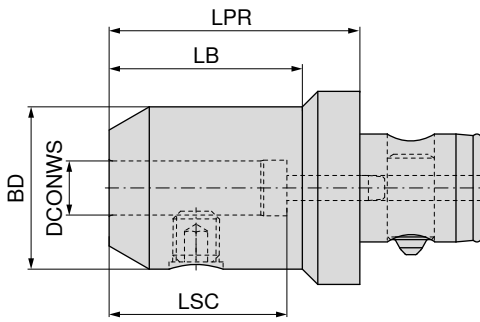

84 221 ...

Adapter	KOMET no.	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	
ABS 50	A32 40010	6	45	25,0	27	40	00697
ABS 50	A32 40020	8	45	28,0	27	40	00897
ABS 50	A32 40030	10	55	35,0	37	44	01097
ABS 50	A32 40040	12	65	42,0	50	49	01297
ABS 50	A32 40080	14	65	44,0	50	49	01497
ABS 50	A32 40050	16	65	48,0	50	52	01697
ABS 50	A32 40090	18	65	49,9	50	52	01897
ABS 50	A32 40060	20	65	52,0	50	54	02097
ABS 50	A32 40070	25	75	65,0	60	60	02597 <sup>1)</sup>
ABS 63	A32 50040	12	65	42,0	50	49	01296
ABS 63	A32 50100	14	65	44,0	50	49	01496
ABS 63	A32 50050	16	65	48,0	50	52	01696
ABS 63	A32 50110	18	65	50,0	50	52	01896
ABS 63	A32 50060	20	65	52,0	45	54	02096
ABS 63	A32 50070	25	75	65,0	60	60	02596 <sup>1)</sup>
ABS 63	A32 50080	32	80	72,0	65	64	03296 <sup>1)</sup>
ABS 80	A32 60060	20	65	52,0	45	54	02092
ABS 80	A32 60070	25	75	65,0	55	60	02592 <sup>1)</sup>
ABS 80	A32 60080	32	80	72,0	66	64	03292 <sup>1)</sup>

1) Version with two grub screws



Grubscrew

62 950 ...


### Spare parts

DCONWS		
6	M6x10	006
8	M8x10	008
10	M10x12	010
12	M12x16	012
14	M12x16	012
16	M14x16	016
18	M14x16	016
20	M16x16	020
25	M18x2x20	025
32	M20x2x20	032

 For an overview of the ABS spare parts, take a look at **page 314**.

# Cylindrical Shank Adapter (Whistle Notch)

▲ For shanks according to DIN 6535 HE / 1835 E with angled clamping flat

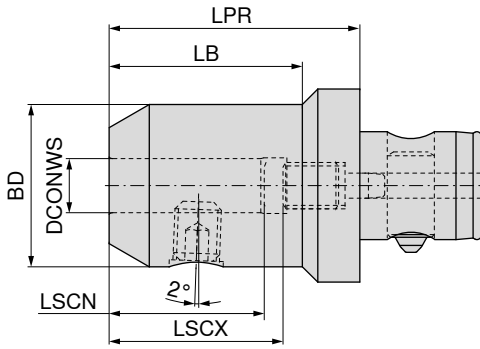

84 220 ...


Adapter	KOMET no.	DCONWS mm	LPR mm	LB mm	BD mm	LSCX mm	LSCN mm	
ABS 25	A30 10601	6	55	40	24,9	36	26	00690
ABS 25	A30 10801	8	55	40	28,0	36	26	00890
ABS 25	A30 11001	10	60	45	35,0	40	30	01090
ABS 32	A30 20601	6	55	40	25,0	36	26	00689
ABS 32	A30 20801	8	55	40	28,0	36	26	00889
ABS 32	A30 20901	9	55	40	28,0	36	26	00989
ABS 32	A30 21001	10	60	45	35,0	40	30	01089
ABS 32	A30 21201	12	65	50	42,0	45	35	01289
ABS 32	A30 21401	14	65		42,0	45	35	01489
ABS 40	A30 30601	6	55	35	25,0	36	26	00688
ABS 40	A30 30801	8	55	35	28,0	36	26	00888
ABS 40	A30 31001	10	60	45	35,0	40	30	01088
ABS 40	A30 31201	12	65	50	42,0	45	35	01288
ABS 40	A30 31401	14	65	50	42,0	45	35	01488
ABS 40	A30 31601	16	70	55	48,0	48	38	01688
ABS 40	A30 31801	18	70	55	48,0	48	38	01888
ABS 50	A30 40601	6	55	30	25,0	36	26	00697
ABS 50	A30 40801	8	55	30	28,0	36	26	00897
ABS 50	A30 41001	10	60	40	35,0	40	30	01097
ABS 50	A30 41201	12	65	50	42,0	45	35	01297
ABS 50	A30 41301	13	65	50	42,0	45	35	01397
ABS 50	A30 41401	14	65	50	42,0	45	35	01497
ABS 50	A30 41601	16	70	55	48,0	48	38	01697
ABS 50	A30 41801	18	70	55	48,0	48	38	01897
ABS 50	A30 42002	20	75	60	52,0	50	40	02097
ABS 50	A30 42202	22	75	60	52,0	50	40	02297
ABS 50	A30 42502	25	75	60	52,0	50	40	02597 <sup>1)</sup>
ABS 63	A30 51001	10	60	35	35,0	40	30	01096
ABS 63	A30 51201	12	65	45	42,0	45	35	01296
ABS 63	A30 51401	14	65	45	42,0	45	35	01496
ABS 63	A30 51601	16	70	50	48,0	48	38	01696
ABS 63	A30 51801	18	70	50	48,0	48	38	01896
ABS 63	A30 52001	20	75	55	52,0	50	40	02096
ABS 63	A30 52501	25	80	65	65,0	56	46	02596 <sup>1)</sup>
ABS 63	A30 52801	28	80	65	65,0	56	46	02896 <sup>1)</sup>
ABS 80	A30 62501	25	80	60	65,0	56	46	02592 <sup>1)</sup>
ABS 80	A30 63201	32	90	70	72,0	60	50	03292 <sup>1)</sup>

1) Version with two grub screws

## Spare parts cylindrical shank adapter (Whistle Notch) with ABS connection



Grubscrew



Backstop screw

		62 950 ...		84 950 ...
<b>Spare parts</b>				
<b>DCONWS</b>				
6	M6x10	<b>006</b>	M5x16	<b>20500</b>
8	M8x10	<b>008</b>	M6x16 - SW2,5	<b>20600</b>
9	M8x10	<b>008</b>	M8x1x16 - SW3	<b>20800</b>
10	M10x12	<b>010</b>	M8x1x16 - SW2,5	<b>20700</b>
12	M12x16	<b>012</b>	M10x1x18 - SW3	<b>20900</b>
13	M12x16	<b>012</b>	M12x1x17 - SW3	<b>21000</b>
14	M12x16	<b>012</b>	M12x1x17 - SW3	<b>21000</b>
16	M14x16	<b>016</b>	M14x1x19 - SW4	<b>21100</b>
18	M14x16	<b>016</b>	M14x1x19 - SW4	<b>21100</b>
20	M16x16	<b>020</b>	M16x1x21 - SW5	<b>21200</b>
22	M16x16	<b>020</b>	M16x1x21 - SW5	<b>21200</b>
25	M16x16	<b>020</b>	M16x1x21 - SW5	<b>21200</b>
28	M18x2x20	<b>025</b>	M16x1x21 - SW5	<b>21200</b>
32	M20x2x20	<b>032</b>	M20x1x27 - SW8	<b>21300</b>




For an overview of the ABS spare parts, take a look at **page 314**.

# ER collet chuck with ABS connection

**Scope of supply:**

Holder with lock nut and adjustable back stop

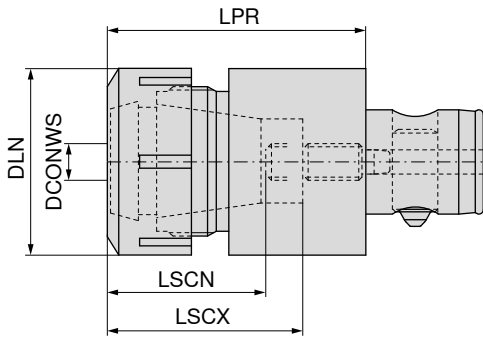

84 224 ...

Adapter	KOMET no.	for collet	DCONWS mm	LPR mm	DLN mm	LSCX mm	LSCN mm	
ABS 25	A33 11120	426E (ER16)	1 - 10	40,1	28	31	28	01690 <sup>1)</sup>
ABS 32	A33 12130	428E (ER20)	1 - 13	52,5	34	39	35	02089 <sup>1)</sup>
ABS 40	A33 13141	430E (ER25)	1 - 16	62,0	42	46	43	02588
ABS 50	A33 14151	470E (ER32)	2 - 20	69,3	50	51	48	03297
ABS 63	A33 15161	472E (ER40)	3 - 26	78,3	63	55	52	04096


1) with 6 position lock nut

Spare parts for collet	62 950 ...		83 950 ...		62 950 ...		84 950 ...	
	Lock nut	Lock nut IK	Lock nut	Backstop screw	Lock nut	Backstop screw	Lock nut	Backstop screw
426E (ER16)	M22x1,5 - SW25	044	M22x1,5	054	M5x8 - SW2	22500		
428E (ER20)	M25x1,5 - SW30	045	M25x1,5	053	M6x12 - SW2,5	22000		
430E (ER25)			M32x1,5	055	M8x1x14 - SW4	22600		
470E (ER32)			M40x1,5	056	M40x1,5	65600	M10x1x14 - SW5	22700
472E (ER40)			M50x1,5	057	M50x1,5	65700	M12x1x18 - SW8	22800

For an overview of the ABS spare parts, take a look at **page 314**.

## Quick change tap chuck with length compensation

▲ With length compensation under tension and compression (LZD)

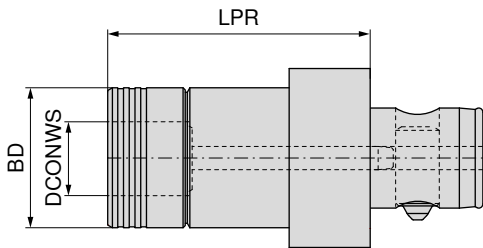


84 225 ...

Adapter	KOMET no.	DCONWS mm	BD mm	LPR mm	SZID	
ABS 32	A34 32060	19	39	69	01	01989
ABS 40	A34 33060	19	39	73	01	01988
ABS 50	A34 34060	19	39	72	01	01997
ABS 50	A34 34070	31	60	98	02	03197
ABS 63	A34 35070	31	60	111	02	03196

## Short drill chuck

### Scope of supply:

Toolholder including clamping key SW4

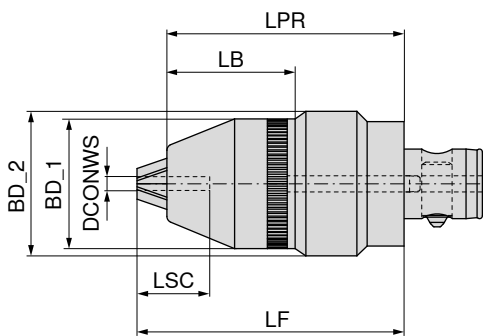

G 6,3 n<sub>max</sub> 10000


84 247 ...

Adapter	DCONWS mm	BD_1 mm	BD_2 mm	LPR mm	LSC mm	LF mm	LB mm	
ABS 50	0,5 - 13	49	57,5	95	29	104,0	51,5	01397
ABS 50	2,5 - 16	52	57,5	95	29	105,5	52,0	01697

### Accessories

Collet	Pull studs	Others
→ 288-292	→ 58	→ 284

# Synchro tapping chuck

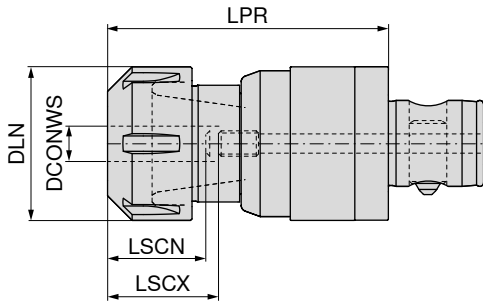

84 226 ...

Adapter	KOMET no.	for collet	DCONWS mm	LPR mm	DLN mm	LSCX mm	LSCN mm	
ABS 32	50795131002000	ER 20	1 - 13	78,0	34	42	29	02089
ABS 50	50795135002000	ER 20	1 - 13	85,0	34	42	29	02097
ABS 50	50795135003200	ER 32	2 - 20	90,5	50	45	31	03297

 For an overview of the ABS spare parts, take a look at **page 314**.

## Accessories





ER collet

→ 268-276, 278-279

# Shell mill adapter

**Scope of supply:**

Base body including drive dogs and retaining screw

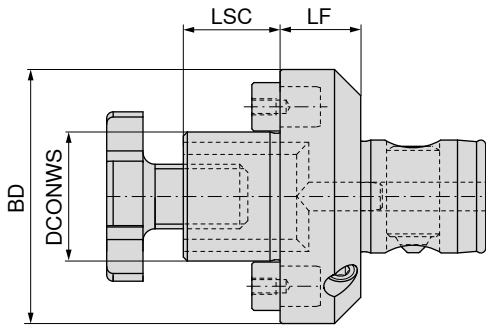

Adapter	KOMET no.	DCONWS mm	LSC mm	LF mm	BD mm	84 228 ...	84 228 ...
ABS 50	A40 24023	16	17	20	50		01697
ABS 50	A40 24034	22	19	20	50		02297
ABS 50	A40 24043	27	21	20	50		02797
ABS 50	A40 24053	32	24	20	63		03297
ABS 63	A40 25032	22	19	22	63		02296
ABS 63	A40 25042	27	21	22	63		02796
ABS 63	A40 25052	32	24	22	63		03296
ABS 63	A40 25062	40	27	22	80		04096
ABS 80	A40 26042	27	21	25	80		02792
ABS 80	A40 26052	32	24	25	80		03292
ABS 80	A40 26062	40	27	25	80		04092
ABS 80	A40 16062	40	30	43	88	14092	
ABS 100	A40 27052	32	24	25	100		03291
ABS 100	A40 17062	40	30	38	88	14091	
ABS 100	A40 27062	40	27	25	100		04091
ABS 100	A40 17072	60	40	56	130	06091	

Part	84 950 ...	83 950 ...	83 367 ...
Drive dog			
Driver			
Cross screw			
Spare parts DCONWS			
16			016
22	22900		022
27	23000		027
32	23100		032
40			040
40		295	
60		298	

**Spare parts**

**DCONWS**

16			016
22	22900		022
27	23000		027
32	23100		032
40			040
40		295	
60		298	

For an overview of the ABS spare parts, take a look at **page 314**.





# Combination shell mill adapter

▲ For milling cutters with transverse or longitudinal groove according to DIN 6358

**Scope of supply:**

Base body including retaining screw, drive ring and drive key

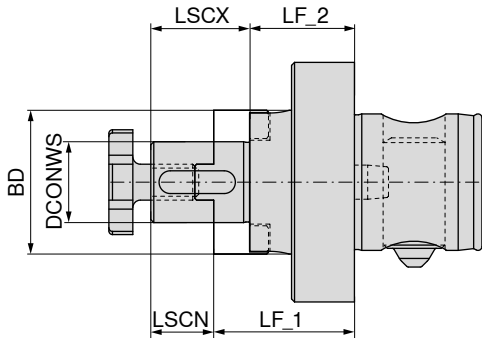

84 229 ...

Adapter	KOMET no.	DCONWS mm	BD mm	LF_1 mm	LF_2 mm	LSCX mm	LSCN mm	
ABS 50	A40 04022	16	32	32	22	27	17	01697
ABS 50	A40 04032	22	40	34	22	31	19	02297
ABS 63	A40 05021	16	32	36	26	27	17	01696
ABS 63	A40 05031	22	40	38	26	31	19	02296
ABS 63	A40 05041	27	48	38	26	33	21	02796
ABS 80	A40 06031	22	40	45	33	31	19	02292
ABS 80	A40 06041	27	48	45	33	33	21	02792
ABS 80	A40 06051	32	58	47	33	38	24	03292
ABS 80	A40 06061	40	70	47	33	41	27	04092



83 950 ...

83 370 ...


83 367 ...

**Spare parts**

DCONWS				
16	4 x 4 x 20	284	116	M8 016
22	6 x 6 x 25	285	122	M10 022
27	7 x 7 x 25	286	127	M12 027
32	8 x 7 x 28	287	132	M16 032
40	10 x 8 x 32	288	140	M20 040

For an overview of the ABS spare parts, take a look at **page 314**.

# Extension with ABS Connection

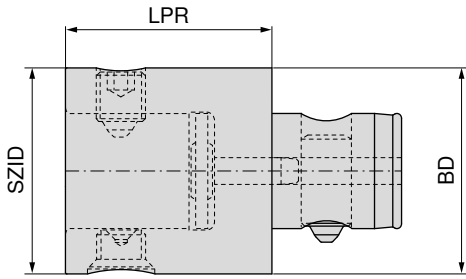

84 209 ...

Adapter	KOMET no.	SZID	BD	LPR	
			mm	mm	
ABS 25	A20 00020	ABS 25	25	45	04590
ABS 25	A20 00220	ABS 25	25	60	06090
ABS 32	A20 00530	ABS 32	32	35	03589
ABS 32	A20 00030	ABS 32	32	50	05089
ABS 32	A20 00230	ABS 32	32	70	07089
ABS 40	A20 00540	ABS 40	40	40	04088
ABS 40	A20 00040	ABS 40	40	60	06088
ABS 40	A20 00240	ABS 40	40	90	09088
ABS 50	A20 00550	ABS 50	50	50	05097
ABS 50	A20 00050	ABS 50	50	65	06597
ABS 50	A20 00250	ABS 50	50	100	10097
ABS 50	A20 00150	ABS 50	50	150	15097
ABS 63	A20 00560	ABS 63	63	60	06096
ABS 63	A20 00060	ABS 63	63	85	08596
ABS 63	A20 00260	ABS 63	63	125	12596
ABS 63	A20 00160	ABS 63	63	190	19096
ABS 80	A20 00570	ABS 80	80	70	07092
ABS 80	A20 00070	ABS 80	80	85	08592
ABS 80	A20 00270	ABS 80	80	125	12592
ABS 80	A20 00170	ABS 80	80	240	24092
ABS 100	A20 00580	ABS 100	100	85	08591
ABS 100	A20 00080	ABS 100	100	125	12591
ABS 100	A20 00280	ABS 100	100	160	16091
ABS 125	A20 00090	ABS 125	125	160	16085
ABS 125	A20 00290	ABS 125	125	200	20085

Spare parts


Adapter	Clamping screw	Clamping screw	Positioning pin	Pendulum bolt	Coolant pipe	Taper screw
	62 950 ...	84 950 ...	84 950 ...	84 950 ...	84 950 ...	84 950 ...
ABS 25		26800	23600	26000	24400	27000
ABS 32	13989		23700	26100	24500	27100
ABS 40		26900	23800	26200	24600	27200
ABS 50		20300	20200	20000	20100	20400
ABS 63		25500	23900	26300	24700	27300
ABS 80		25600	24000	26400	24800	25100
ABS 100		25700	24100	26500	24900	25200
ABS 125		25800	24200	26600	25000	25300

For an overview of the ABS spare parts, take a look at **page 314**.

# Torsional vibration dampers with ABS Connection

**Scope of supply:**

Base body with sealing disc

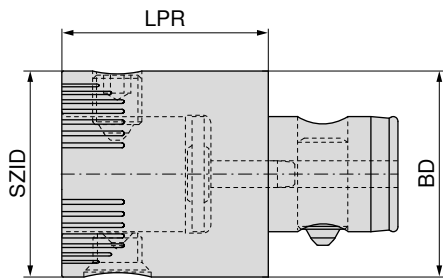


84 216 ...

Adapter	KOMET no.	SZID	BD	LPR
			mm	mm
ABS 50	A20 00651	ABS 50	50	50
ABS 63	A20 00661	ABS 63	63	60
ABS 80	A20 00670	ABS 80	80	70

05097


06096

07092



Clamping screw

84 950 ...




Taper screw

84 950 ...

**Spare parts**

**Adapter**

ABS 50	20300	20400
ABS 63	25500	27300
ABS 80	25600	25100


 For an overview of the ABS spare parts, take a look at **page 314**.

# Eccentric adjuster with ABS Connection

▲ Adjustment ± 0.25 mm on diameter

**Scope of supply:**



Eccentric adjuster with adjuster key Ø 2.8 mm

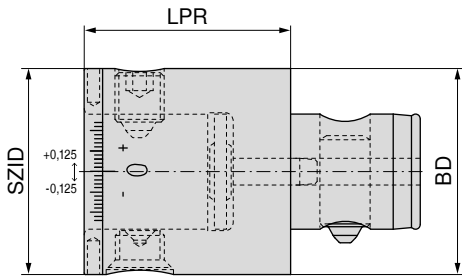

84 217 ...

Adapter	KOMET no.	SZID	BD	LPR
			mm	mm
ABS 50	A20 00620	ABS 50	50	50
ABS 63	A20 00630	ABS 63	63	60

05097  
06096



84 950 ...

84 950 ...

**Spare parts**


**Adapter**

ABS 50	20300	20400
ABS 63	25500	27300

For an overview of the ABS spare parts, take a look at **page 314**.



## Damping element with ABS connection

- ▲ The specially mounted damping core enables perfect machining results even with longer tool overhangs
- ▲ Reduction in machining times due to optimum machining parameters
- ▲ Damped machining and therefore perfect surface qualities
- ▲ Protection of the machine spindle and increased tool service life

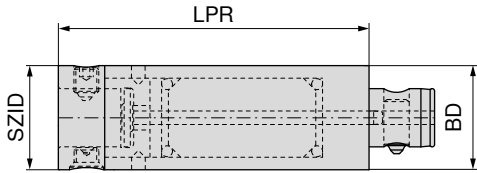

84 218 ...

Adapter	KOMET no.	SZID	BD mm	LPR mm	RPMX 1/min.	
ABS 40	A20 01240	ABS 40	40	120	8000	12088
ABS 50	A20 01250	ABS 50	50	150	6300	15097
ABS 63	A20 01260	ABS 63	63	190	5000	19096
ABS 80	A20 01270	ABS 80	80	240	4000	24092



84 950 ...


84 950 ...

### Spare parts

Adapter	84 950 ...	84 950 ...
ABS 40	26900	27200
ABS 50	20300	20400
ABS 63	25500	27300
ABS 80	25600	25100

 For an overview of the ABS spare parts, take a look at **page 314**.

# ABS reduction

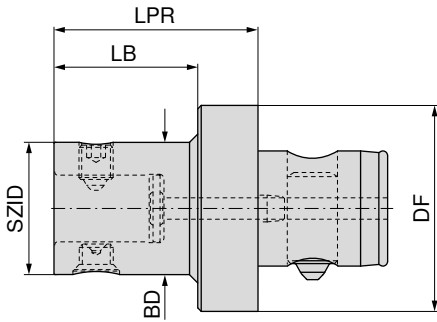

84 219 ...

Adapter	KOMET no.	SZID	BD	DF	LPR	LB	
			mm	mm	mm	mm	
ABS 32	A20 10120	ABS 25	25	32	40	30	03290
ABS 40	A20 10220	ABS 25	25	40	40	28	04090
ABS 40	A20 10230	ABS 32	32	40	40	28	04089
ABS 50	A20 10320	ABS 25	25	50	50	35	05090
ABS 50	A20 10330	ABS 32	32	50	50	35	05089
ABS 50	A20 10340	ABS 40	40	50	50	35	05088
ABS 63	A20 10420	ABS 25	25	63	60	40	06390
ABS 63	A20 10430	ABS 32	32	63	60	40	06389
ABS 63	A20 10440	ABS 40	40	63	60	40	06388
ABS 63	A20 10450	ABS 50	50	63	60	40	06397
ABS 80	A20 10530	ABS 32	32	80	60	35	08089
ABS 80	A20 10540	ABS 40	40	80	60	35	08088
ABS 80	A20 10550	ABS 50	50	80	60	35	08097
ABS 80	A20 10560	ABS 63	63	80	60	35	08096
ABS 100	A20 10650	ABS 50	50	100	80	50	10097
ABS 100	A20 10660	ABS 63	63	100	80	50	10096
ABS 100	A20 10670	ABS 80	80	100	80	50	10092
ABS 125	A20 10770	ABS 80	80	125	100	50	12592
ABS 125	A20 10780	ABS 100	100	125	100	50	12591

	62 950 ...	84 950 ...	84 950 ...
Clamping screw			
Clamping screw			
Taper screw			
SZID			
ABS 25		26800	27000
ABS 32	13989	27100	
ABS 40		26900	27200
ABS 50		20300	20400
ABS 63		25500	27300
ABS 80		25600	25100
ABS 100		25700	25200


**Spare parts**  
SZID

ABS 25
ABS 32
ABS 40
ABS 50
ABS 63
ABS 80
ABS 100

For an overview of the ABS spare parts, take a look at **page 314**.

## Blank

- ▲ Connection area hardened and ground
- ▲ Dimension BD x dimension LB = unhardened area for further processing

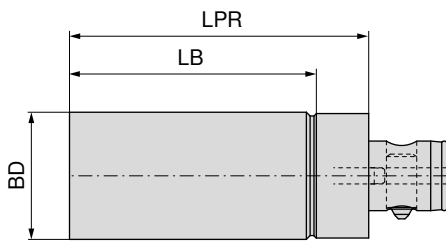


84 230 ...

Adapter	KOMET no.	LPR mm	BD mm	LB mm	
ABS 25	B10 01011	70	26	55	02690
ABS 32	B10 02011	80	33	65	03389
ABS 40	B10 03011	100	41	82	04188
ABS 50	B10 04011	120	51	99	05197
ABS 63	B10 05011	150	64	124	06496
ABS 80	B10 06011	180	81	145	08192
ABS 100	B10 07011	200	101	158	10191



For an overview of the ABS spare parts, take a look at [page 314](#).


### MonoClamp – HSK-T Blade Holder GX/LX/FX/SX

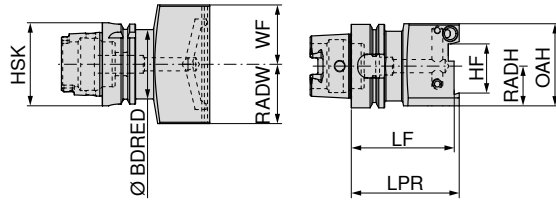

radial  
**74 586 ...**

Adapter	LPR	LF	BDRED	WF	HF	OAH	RADW	RADH	for parting blades	
	mm	mm	mm	mm	mm	mm	mm	mm		
HSK-T 63	84,0	80	52,6	45	26	62	45	30	XLCF N 26...	02637
HSK-T 63	85,5	80	52,6	45	32	68	45	34	XLCF N 32...	03237

### MonoClamp – HSK-T Blade Holder GX/LX/FX/SX

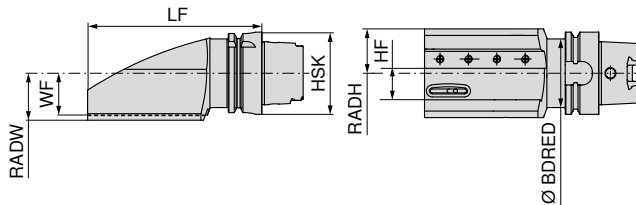

Illustrations show right-hand versions



Left-hand  
**74 585 ...**



Right-hand  
**74 584 ...**

Adapter	LF	BDRED	WF	HF	RADW	RADH	for parting blades		
	mm	mm	mm	mm	mm	mm			
HSK-T 63	155	52,6	32	26	36,0	34	XLCF R/L 26...	02637	02637
HSK-T 63	155	52,6	32	32	37,5	35	XLCF R/L 32...	03237	03237



**70 950 ...**



**70 950 ...**



**70 950 ...**



**70 950 ...**


**Spare parts for parting blades**

XLCF R/L 26...	19x2,5	<b>293</b>	23x2,5	<b>292</b>	<b>860</b>	M6x12	<b>861</b>
XLCF R/L 32...	19x2,5	<b>293</b>	23x2,5	<b>292</b>	<b>860</b>	M6x12	<b>861</b>



## HSK-T square shank adapter 0°

- ▲ Suitable for stationary tool holder HF = 20 / 25 / 32 mm
- ▲ These HF values can be achieved by removing the mounting adapter and clamping block

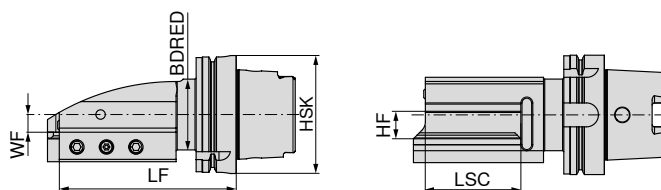

Illustrations show right-hand versions



Left-hand

74 571 ...



Right-hand

74 570 ...


Adapter	LF mm	BDRED mm	WF mm	LSC mm	HF mm
HSK-T 63	145	52,6	15	80	20 / 25 / 32
HSK-T 100	150	60,0	15	80	20 / 25 / 32

02537  
02535

02537  
02535

## HSK-T square shank adapter 45°

- ▲ Suitable for stationary tool holder HF = 20 / 25 / 32 mm
- ▲ These HF values can be achieved by removing the mounting adapter and clamping block

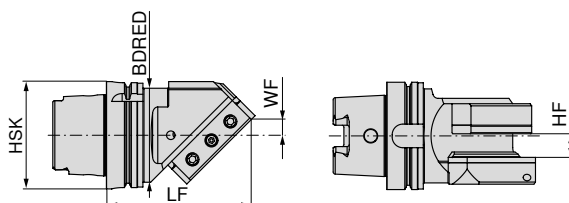

Illustrations show right-hand versions



Left-hand

74 573 ...



Right-hand

74 572 ...


Adapter	LF mm	BDRED mm	WF mm	HF mm
HSK-T 63	130	52,6	14,6	20 / 25 / 32
HSK-T 100	135	87,6	14,6	20 / 25 / 32

02537  
02535

02537  
02535

## HSK-T square shank adapter 90°

- ▲ Suitable for stationary tool holder HF = 20 / 25 / 32 mm
- ▲ These HF values can be achieved by removing the mounting adapter and clamping block

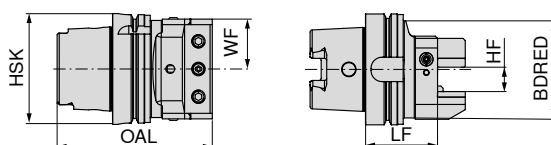

Neutral

74 575 ...


Adapter	LF mm	BDRED mm	WF mm	OAL mm	HF mm
HSK-T 63	60	52,6	45	117	20 / 25 / 32
HSK-T 100	65	87,6	45	140	20 / 25 / 32

02537  
02535

## Spare parts HSK-T square shank holders with DirectCooling

		Cylindrical screw		Clamping screw	
		83 950 ...		62 950 ...	
<b>Spare parts</b>					
<b>Adapter</b>					
HSK-T 63		M5x5 - SW2,5	157	M12x16 - SW6	51100
HSK-T 100		M5x5 - SW2,5	157	M12x16 - SW6	51100

## HSK-T square shank adapter 3-face 0°

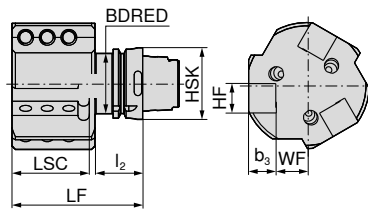


ISO designation	Adapter	LF	l <sub>2</sub>	BDRED	WF	LSC	b <sub>3</sub>	HF	
HSK T63 SH3 L 00 2525	HSK-T 63	115	42	53	28	68	25	25	525
HSK T100 SH3 L 00 2525	HSK-T 100	120	45	88	33	70	25	25	725

Left-hand  
**74 576 ...**

		Protection plugs	Nozzle	Hollow key with nose	Grubscrew
		70 950 ...	70 950 ...	70 950 ...	70 950 ...
<b>Spare parts</b>					
<b>Adapter</b>					
HSK-T 63		UNJF 7/16"-20	05600	UNJF 7/16"-20	05500
HSK-T 100		UNJF 7/16"-20	05600	UNJF 7/16"-20	05500
				05700	M12x1,75x25
				05700	M12x1,75x25
					851
					851


## HSK-T Boring bar holder



ISO designation	Adapter	LPR	DCONWS	BD	LSC	LF	BTED	
HSK T63 BH08 80	HSK-T 63	80	8	32	41			508
HSK T63 BH10 80	HSK-T 63	80	10	40	41			510
HSK T63 BH12 80	HSK-T 63	80	12	40	41			512
HSK T63 BH16 80	HSK-T 63	80	16	40	51			516
HSK T63 BH20 80	HSK-T 63	80	20	50	51			520
HSK T63 BH25 90	HSK-T 63	90	25	53	61			525
HSK T63 BH32 95	HSK-T 63	95	32	68	61	42	53	532
HSK T100 BH20 90	HSK-T 100	90	20	55	56			720
HSK T100 BH25 95	HSK-T 100	95	25	55	61			725
HSK T100 BH32 110	HSK-T 100	110	32	68	61			732
HSK T100 BH40 120	HSK-T 100	120	40	83	81			740
HSK T100 BH50 125	HSK-T 100	125	50	98	91	45	88	750

**74 577 ...**


## MonoClamp – PSC parting blade holder GX/LX/FX/SX with DirectCooling

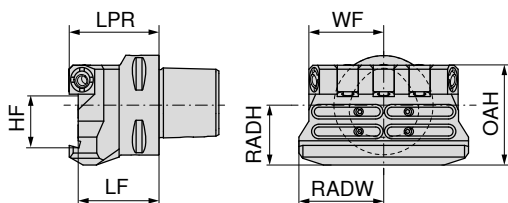

radial  
84 617 ...

Adapter	LF mm	LPR mm	WF mm	HF mm	OAH mm	RADW mm	RADH mm	for parting blades	
PSC 40	40,5	45	37,5	26	50	42,5	30	XLCF N 26...	62695
PSC 50	40,5	45	37,5	26	50	42,5	30	XLCF N 26...	62694
PSC 63	45,5	50	40,0	32	57	45,0	35	XLCF N 32...	63293

## MonoClamp – PSC parting blade holder GX/LX/FX/SX with DirectCooling

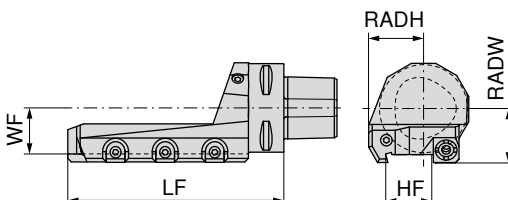

Diagrams show right hand versions



Left-hand



Right-hand

84 617 ...


84 617 ...

Adapter	LF mm	WF mm	HF mm	RADW mm	RADH mm	for parting blades		
PSC 40	122	21	26	25,5	31	XLCF N 26...	32695	22695
PSC 50	122	26	26	30,5	31	XLCF N 26...	32694	22694
PSC 63	160	32	32	36,5	37	XLCF N 32...	33293	23293

## PSC square shank holder 0° with DirectCooling

▲ Suitable for tool holders with PSC 63 – HF = 20 / 25 mm / PSC 80 – HF = 25 mm

▲ These HF values can be achieved by removing the clamping block

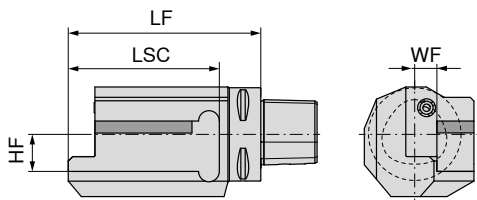

Diagrams show right hand versions



Left-hand



Right-hand


84 616 ...

84 616 ...


Adapter	LF mm	WF mm	LSC mm	HF mm			
PSC 63	130	15	102	20 / 25		32593	22593
PSC 80	130	20	102	25		32586	22586

## PSC square shank holder 45° with DirectCooling

- ▲ Suitable for tool holders with PSC 50 – HF = 20 mm / PSC 63 – HF = 20 / 25 mm
- ▲ These HF values can be achieved by removing the clamping block

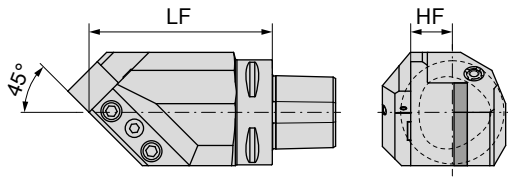

Diagrams show right hand versions




Left-hand Right-hand

Adapter	LF mm	HF mm
PSC 50	85	20
PSC 63	110	20 / 25

NEW	NEW
84 616 ...	84 616 ...
12094	02094
12593	02593

## PSC square shank holder 90° with DirectCooling

- ▲ Suitable for tool holders with PSC 40 – HF = 20 mm / PSC 63 HF = 20 / 25 mm
- ▲ These HF values can be achieved by removing the clamping block

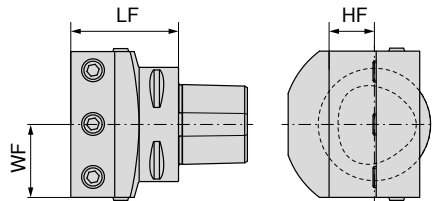


Neutral

Adapter	LF mm	WF mm	HF mm
PSC 40	55	40	20
PSC 63	71	40	20 / 25

NEW
84 616 ...
62095
62593

### Radial parting blade holder, right / left

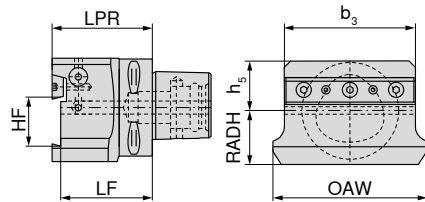


Neutral


**84 132 ...**

Adapter	HF mm	LPR mm	OAW mm	b <sub>3</sub> mm	h <sub>5</sub> mm	RADH mm	LF mm	
PSC 63	26	65	91	75	30	30	60	626
PSC 63	32	65	100	85	32	35	60	632

### Square section adapter, single face


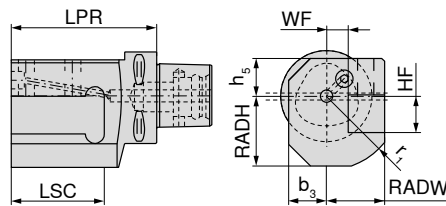


Illustrations show right-hand versions



Adapter	HF mm	LPR mm	b <sub>3</sub> mm	RADW mm	r <sub>1</sub> mm	WF mm	h <sub>5</sub> mm	RADH mm	LSC mm	Left-hand	Right-hand
										<b>84 611 ...</b>	<b>84 610 ...</b>
PSC 50	20	80	26	35	45	15	26	43	53	520	520
PSC 50	25	90	26	40	51	15	26	48	64	525	525
PSC 50	32	115	26	47	61	15	26	55	90	532	532
PSC 63	20	90	26	35	45	15	26	43	53	620	620
PSC 63	25	100	26	40	51	15	26	48	64	625	625
PSC 63	32	125	26	47	61	15	26	55	90	632	632
PSC 80	20	90	26	35	45	15	26	43	53	820	820
PSC 80	25	100	26	40	51	15	26	48	64	825	825
PSC 80	32	125	26	47	61	15	26	55	90	832	832

### Radial square section tool holders 90°

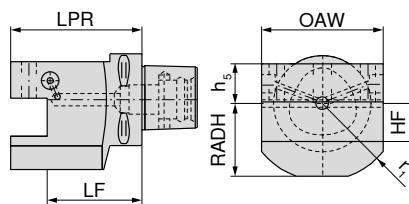


Neutral

**84 602 ...**


Adapter	HF mm	LPR mm	OAW mm	r <sub>1</sub> mm	RADH mm	h <sub>5</sub> mm	LF mm	
PSC 50	20	70	70	45	43	26	50	520
PSC 50	25	80	80	51	48	26	55	525
PSC 50	32	90	90	61	55	26	58	532
PSC 63	20	80	70	45	43	26	60	620
PSC 63	25	90	80	51	48	26	65	625
PSC 63	32	100	90	61	55	26	68	632
PSC 80	20	80	70	45	43	26	60	820
PSC 80	25	90	80	51	48	26	65	825
PSC 80	32	100	90	61	55	26	68	832

### Square section adapter 45°

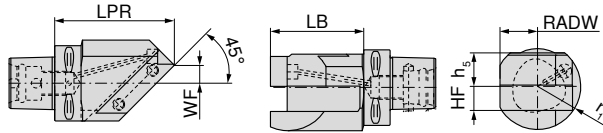


Illustrations show right-hand versions

Adapter	HF mm	LPR mm	RADW mm	r <sub>1</sub> mm	WF mm	h <sub>s</sub> mm	LB mm
PSC 50	20	100	31	36	15	26	80
PSC 63	20	100	32	36	15	28	78
PSC 80	32	135	45	70	17	40	105




Left-hand	Right-hand
<b>84 605 ...</b>	<b>84 604 ...</b>
520	520
620	620
832	832

### Square section adapter, double face




Illustrations show right-hand versions

Adapter	HF mm	LPR mm	RADW mm	r <sub>1</sub> mm	WF mm	LSC mm
PSC 50	20	80	35	45	15	53
PSC 50	25	90	40	51	15	64
PSC 50	32	115	47	61	15	90
PSC 63	20	90	35	45	15	53
PSC 63	25	100	40	51	15	64
PSC 63	32	125	47	61	15	90
PSC 80	20	90	35	45	15	53
PSC 80	25	100	40	51	15	64
PSC 80	32	125	47	61	15	90




Left-hand	Right-hand
<b>84 613 ...</b>	<b>84 612 ...</b>
520	520
525	525
532	532
620	620
625	625
632	632
820	820
825	825
832	832

### Square section adapter, triple face

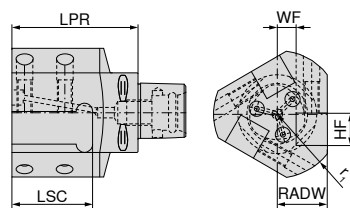


Illustrations show right-hand versions

Adapter	HF mm	LPR mm	RADW mm	r <sub>1</sub> mm	WF mm	LSC mm
PSC 50	20	80	35	45	15	53
PSC 50	25	90	40	51	15	64
PSC 50	32	115	47	61	15	90
PSC 63	20	90	35	45	15	53
PSC 63	25	100	40	51	15	64
PSC 63	32	125	47	61	15	90
PSC 80	20	90	35	45	15	53
PSC 80	25	100	40	51	15	64
PSC 80	32	125	47	61	15	90



Left-hand	Right-hand
<b>84 615 ...</b>	<b>84 614 ...</b>
520	520
525	525
532	532
620	620
625	625
632	632
820	820
825	825
832	832

# Boring bar holder



84 130 ...

Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	
PSC 50	6	70	40	50	40	506
PSC 50	8	70	44	50	40	508
PSC 50	10	70	44	50	45	510
PSC 50	12	70	44	50	45	512
PSC 50	16	75	44	55	45	516
PSC 50	20	75	50	75	51	520
PSC 50	25	80	55	50	51	525
PSC 50	32	90	63	70	60	532
PSC 63	6	75	40	53	40	606
PSC 63	8	75	44	53	40	608
PSC 63	10	75	44	53	45	610
PSC 63	12	75	44	53	45	612
PSC 63	16	75	44	53	45	616
PSC 63	20	75	50	53	51	620
PSC 63	25	75	55	53	51	625
PSC 63	32	75	72	52	60	632
PSC 63	40	105	70	82	90	640




84 950 ...

Spare parts		
DCONWS		
6	M6x16	153
8	M8x16	154
10	M10x16	155
12 - 40	M12x14	156

# Boring bar adapter, split version

- ▲ vibration-damped
- ▲ ideally suited for large overhangs



Adapter	DCONWS mm	LPR mm	BD mm	LB mm	LSC mm	84 131 ...
PSC 63	6	80	40	58	60	606
PSC 63	8	85	45	63	65	608
PSC 63	10	85	50	63	65	610
PSC 63	12	100	63	78	80	612
PSC 63	16	100	63	78	80	616
PSC 63	20	100	68	78	80	620
PSC 63	25	100	68	78	80	625
PSC 63	32	100	72	78	80	632


## Spare parts DCONWS

DCONWS	Grubscrew	83 950 ...	84 950 ...
8		462	
10	M6x20	462	M6x16
12 - 20	M8x20	468	153
25	M8x25	467	
32	M10x20	471	



## Extension, axial clamping


- ▲ Run-out  $\leq 0.002$  mm
- ▲ max. speed 8,000 rpm

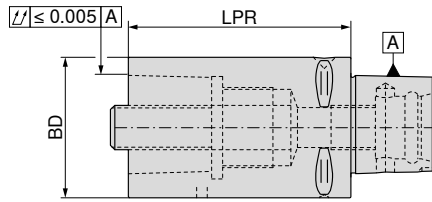

Adapter	BD mm	LPR mm	84 620 ...
PSC 32	32	60	301
PSC 32	32	80	302
PSC 40	40	60	401
PSC 40	40	80	402
PSC 50	50	80	501
PSC 50	50	100	502
PSC 63	63	100	601
PSC 63	63	140	602
PSC 80	80	100	801
PSC 80	80	125	802

### Spare parts

Adapter	84 950 ...	84 950 ...
PSC 32	127 SW8	122
PSC 40	128 SW8	123
PSC 50	129 SW10	124
PSC 63	130 SW14	126
PSC 80	130 SW14	126

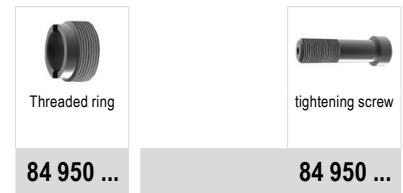


### Accessories



## Cylindrical reduction

- ▲ Run-out  $\leq 0.002$  mm
- ▲ max. speed 8,000 rpm

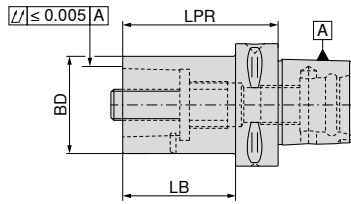

Adapter	BD mm	LPR mm	LB mm
PSC 40	32	55	35
PSC 50	32	60	40
PSC 50	40	65	45
PSC 63	32	70	48
PSC 63	40	80	58
PSC 63	50	80	58
PSC 80	32	60	30
PSC 80	40	70	40
PSC 80	50	80	50
PSC 80	63	80	50
PSC 80X	63	80	48
PSC 80X	80	100	68

84 624 ...

403

503

504

603

604

605

803

804

805

806


816 <sup>1)</sup>

818 <sup>1)</sup>

1) PSC 80X = variant with enlarged flange diameter of 100 mm / standard flange diameter PSC 80 = 80 mm

## Tapered reduction

- ▲ Run-out  $\leq 0.002$  mm
- ▲ max. speed 8,000 rpm

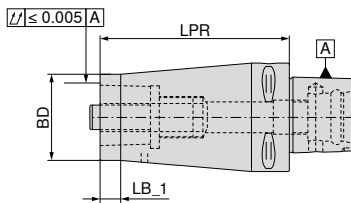

Adapter	BD mm	LPR mm	LB_1 mm
PSC 40	32	70	12
PSC 50	40	85	12
PSC 63	50	110	12
PSC 80	63	120	12
PSC 80X	80	150	12

84 625 ...

403

504

605

806

818 <sup>1)</sup>

1) PSC 80X = variant with enlarged flange diameter of 100 mm / standard flange diameter PSC 80 = 80 mm



84 950 ...

84 950 ...

### Spare parts

#### Adapter

PSC 40  
PSC 50  
PSC 63  
PSC 80  
PSC 80X

128

129

130

130

130

SW8

SW10

SW14

SW14

SW14

123

124

126

126

126



### Accessories



Hollow nose keys


→ 204

## Sealing plugs




Adapter	BD mm	LPR mm	84 135 ...
PSC 40	40	28	040
PSC 50	50	28	050
PSC 63	63	30	060
PSC 80	80	38	080

## Hollow nose key for clamping screw for PSC extensions and reductions

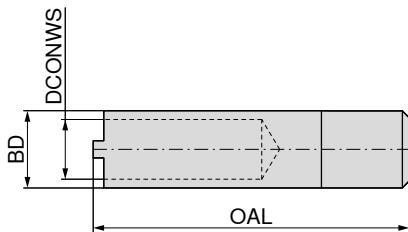

Adapter	BD mm	OAL mm	DCONWS mm	84 651 ...
PSC 32	16	80	12,5	032
PSC 40	20	80	15,0	040
PSC 50	22	90	17,0	050
PSC 63/80/80X	34	110	21,0	063


## Installation instructions: clamping screw for PSC extensions and reductions

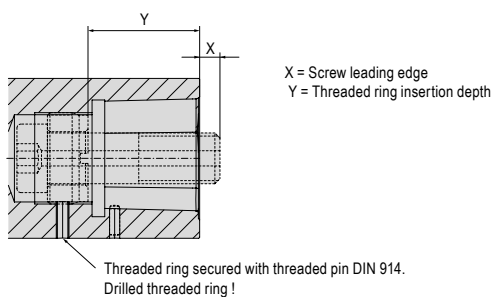

Adapter	X mm	Y mm
PSC 32	5	24
PSC 40	5	29
PSC 50	6	36
PSC 63	8	44
PSC 80	0	53
PSC 80X	0	53

## Radial square section tool holder with DirectCooling – B1 / B2 / B3 / B4

- ▲ Double tooth profile for normal and overhead applications
- ▲ The clamping rails can be attached at the top or bottom (left or right application).
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

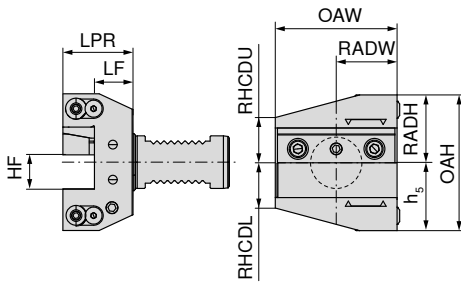



double

82 245 ...

Adapter	HF <sub>0/-0,1</sub> mm	LF <sub>0/+0,5</sub> mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>5</sub> mm	OAH mm	RHCDL mm	RHCDU mm	
VDI 20	16	16	30	55	30	30,0	30	60	22	22	01629
VDI 20	16	26	40	55	30	30,0	30	60	22	22	51629
VDI 25	16	16	30	55	30	30,0	30	60	22	22	01628
VDI 30	20	22	40	70	39	35,0	39	78	26	26	02027
VDI 40	25	22	44	85	47	42,5	47	94	33	33	02526
VDI 50	25	22	44	98	55	50,0	55	110	42	42	02525

## Axial square section tool holder with DirectCooling – C1 / C2 / C3 / C4


- ▲ Double tooth profile for normal and overhead applications
- ▲ The clamping rails can be attached at the top or bottom (left or right application).
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

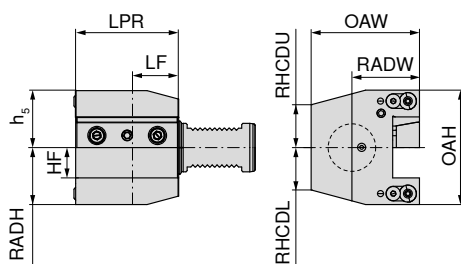

double


82 246 ...

Adapter	HF <sub>0/-0,1</sub> mm	LF mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>5</sub> mm	OAH mm	RHCDL mm	RHCDU mm	
VDI 30	20	30	70	74	39	39,0	39	78	26	26	02027
VDI 40	25	30	85	94	47	52,5	47	94	35	35	02526
VDI 50	25	30	85	105	50	63,0	50	100	42	42	02525

 You can find spare parts on → Page 264+265

## Radial square section tool holder with DirectCooling – B1 / B4

- ▲ Double tooth profile for normal and overhead applications
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

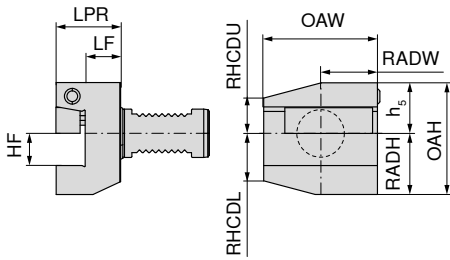


double

82 247 ...

Adapter	HF <sub>0/-0,1</sub> mm	LF <sub>0/+0,5</sub> mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>s</sub> mm	OAH mm	RHCDL mm	RHCDU mm	
VDI 30	20	22	40	70,0	38	35,0	31,5	69,5	29,5	22	02027
VDI 40	25	22	44	85,0	48	42,5	38,0	86,0	35,0	30	02526
VDI 50	25	22	44	92,5	48	50,0	43,0	91,0	43,0	30	02525

## Radial square section tool holder with DirectCooling – B2 / B3

- ▲ Double tooth profile for normal and overhead applications
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

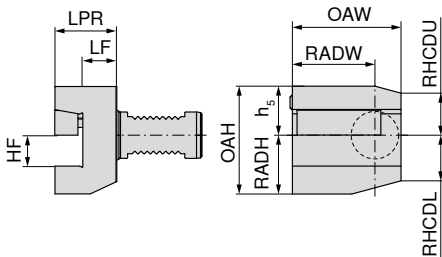

double


82 247 ...

Adapter	HF <sub>0/-0,1</sub> mm	LF <sub>0/+0,5</sub> mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>s</sub> mm	OAH mm	RHCDL mm	RHCDU mm	
VDI 30	20	22	40	70,0	38	35,0	31,5	69,5	29,5	27	12027
VDI 40	25	22	44	85,0	48	42,5	38,0	86,0	35,0	30	12526
VDI 50	25	22	44	92,5	48	50,0	43,0	91,0	35,0	38	12525

You can find spare parts on → Page 264+265

## Axial square section tool holder with DirectCooling – C1 / C4

- ▲ Double tooth profile for normal and overhead applications
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

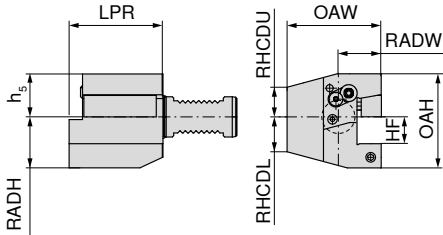

double

82 248 ...

Adapter	HF <sub>0/-0,1</sub> mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>5</sub> mm	OAH mm	RHCDL mm	RHCDU mm
VDI 30	20	70	70,0	38	35,0	32	70	26	22
VDI 40	25	85	85,0	48	42,5	38	86	35	30
VDI 50	25	85	90,5	48	48,0	44	92	42	35



02027

02526

02525

## Axial square section tool holder with DirectCooling – C2 / C3

- ▲ Double tooth profile for normal and overhead applications
- ▲ for turning tool holders with DirectCooling
- ▲ can be used up to 100 bar

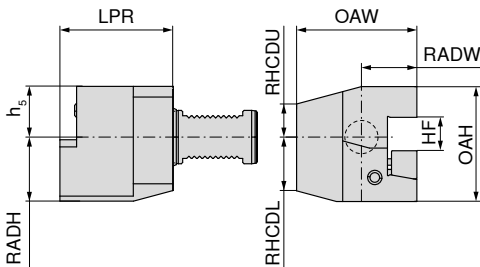

double

82 248 ...

Adapter	HF <sub>0/-0,1</sub> mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>5</sub> mm	OAH mm	RHCDL mm	RHCDU mm
VDI 30	20	70	76	38	41,0	32	70	26	26
VDI 40	25	85	90	48	47,5	38	86	35	30
VDI 50	25	85	95	48	52,5	44	92	42	37

12027




12526

12525

You can find spare parts on → Page 264+265

# Parting blade holder for parting blades with DirectCooling

- ▲ Double tooth profile for normal and overhead applications
- ▲ for parting blades with DirectCooling
- ▲ can be used up to 100 bar

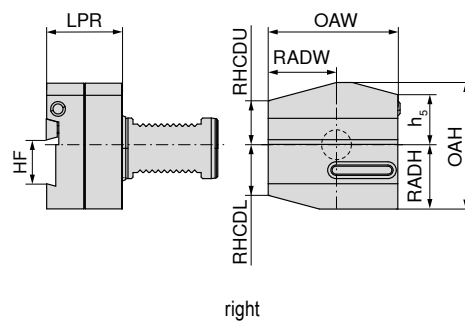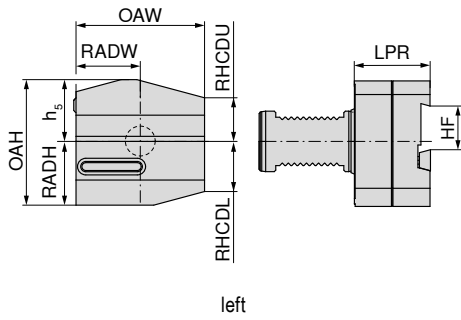

Left-hand

Right-hand

82 249 ...


82 249 ...

Adapter	HF mm	LPR mm	OAW mm	RADH mm	RADW mm	h <sub>s</sub> mm	OAH mm	RHCDL mm	RHCDU mm		
VDI 30	26	50	70	37	35,0	32	69	30	25		
VDI 40	32	50	85	40	42,5	43	83	31	31		
VDI 40	26	50	85	40	42,5	43	83	31	31		
VDI 50	32	50	100	45	50,0	43	88	37	35		




You can find spare parts on → Page 264+265

### Radial tool holders, short

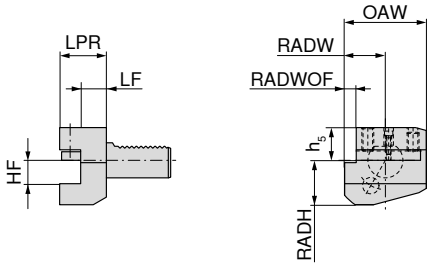

B2

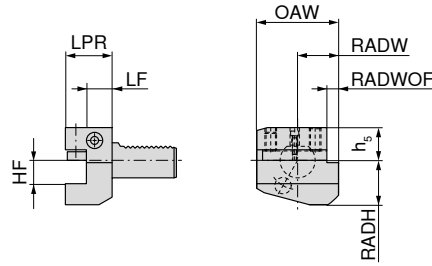

B1




Adapter	HF <sub>0±0,1</sub> mm	OAW mm	RADW mm	RADWOF mm	h <sub>5</sub> mm	RADH mm	LF <sub>0±0,5</sub> mm	LPR mm
VDI 16	12	42	23,0	5,0	20,0	22	13,0	24
VDI 20	16	55	30,0	7,0	25,0	30	26,0	40
VDI 20	16	55	30,0	7,0	25,0	30	16,0	30
VDI 20	16	55	30,0	7,0	25,0	30	18,0	30
VDI 20	16	55	30,0	7,0	25,0	30	25,5	40
VDI 30	20	70	35,0	10,0	28,0	38	18,5	40
VDI 30	20	70	35,0	10,0	28,0	38	42,0	60
VDI 30	20	70	35,0	10,0	28,0	35	32,0	50
VDI 40	25	85	42,5	12,5	32,5	48	18,5	44
VDI 50	32	100	50,0	16,0	35,0	60	30,0	55


1) Height adjustable +/- 1 mm

Left-hand	Right-hand
82 189 ...	82 185 ...
160	160
201	201
200	200
202 <sup>1)</sup>	202 <sup>1)</sup>
	203 <sup>1)</sup>
300	300
301	301
	302 <sup>1)</sup>
400	400
500	500

### Radial tool holders, overhead, short

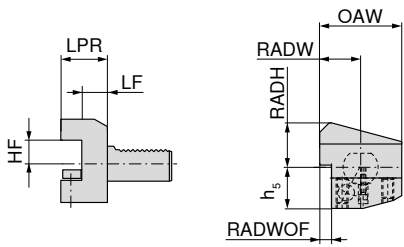

B4

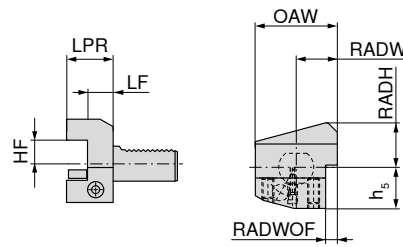

B3



Adapter	HF <sub>0±0,1</sub> mm	OAW mm	RADW mm	RADWOF mm	h <sub>5</sub> mm	RADH mm	LF <sub>0±0,5</sub> mm	LPR mm
VDI 16	12	42	23,0	5,0	20,0	22	13,0	24
VDI 20	16	55	30,0	7,0	25,0	30	26,0	40
VDI 20	16	55	30,0	7,0	25,0	30	18,5	30
VDI 20	16	55	30,0	7,0	25,0	30	26,0	40
VDI 30	20	70	35,0	10,0	35,0	38	18,5	40
VDI 40	25	85	42,5	12,5	42,5	48	18,5	44
VDI 50	32	100	50,0	16,0	50,0	60	30,0	55


1) Height adjustable +/- 1 mm

Left-hand	Right-hand
82 196 ...	82 193 ...
	160
201	201
202 <sup>1)</sup>	202 <sup>1)</sup>
203 <sup>1)</sup>	203 <sup>1)</sup>
300	300
400	400
500	500


You can find spare parts on → Page 266



## Radial tool holders, long

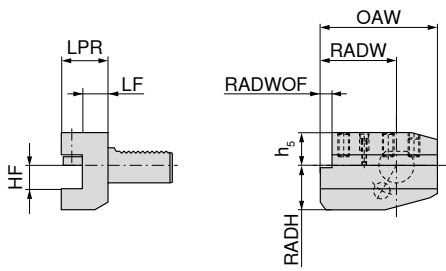

B6

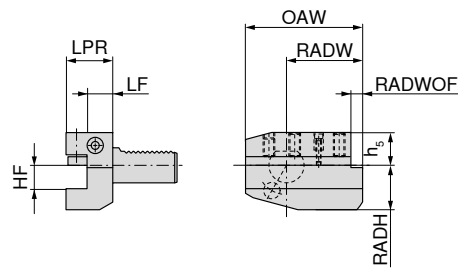

B5



B6




B5

Adapter	HF <sub>0/-0,1</sub> mm	OAW mm	RADW mm	RADWOF mm	h <sub>5</sub> mm	RADH mm	LF <sub>0/+0,5</sub> mm	LPR mm
VDI 20	16	75	50,0	7,0	25,0	30	26,0	40
VDI 20	16	75	50,0	7,0	25,0	30	18,0	30
VDI 30	20	100	65,0	10,0	28,0	38	18,5	40
VDI 40	25	118	75,5	12,5	32,5	48	18,5	44
VDI 50	32	130	80,0	16,0	35,0	60	30,0	55


1) Height adjustable +/- 1 mm

Left-hand	Right-hand
<b>82 202 ...</b>	<b>82 199 ...</b>
201	201
202 <sup>1)</sup>	202 <sup>1)</sup>
300	300
400	400
500	500

## Radial tool holders, overhead, long

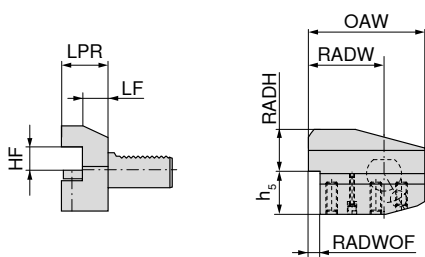

B8

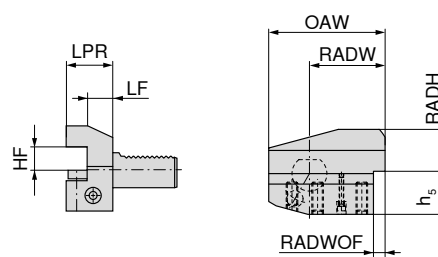

B7



B8




B7


Adapter	HF <sub>0/-0,1</sub> mm	OAW mm	RADW mm	RADWOF mm	h <sub>5</sub> mm	RADH mm	LF <sub>0/+0,5</sub> mm	LPR mm
VDI 20	16	75	50,0	7,0	25,0	30	16,0	30
VDI 20	16	75	50,0	7,0	25,0	30	18,0	30
VDI 30	20	100	65,0	10,0	35,0	38	42,0	60
VDI 30	20	100	65,0	10,0	35,0	38	18,5	40
VDI 40	25	118	75,5	12,5	42,5	48	18,5	44
VDI 50	32	130	80,0	16,0	50,0	60	30,0	55

1) Height adjustable +/- 1 mm

Left-hand	Right-hand
<b>82 208 ...</b>	<b>82 205 ...</b>
200	200
202 <sup>1)</sup>	202 <sup>1)</sup>
300	301
300	300
400	400
500	500

 You can find spare parts on → **Page 266**

### Axial tool holders

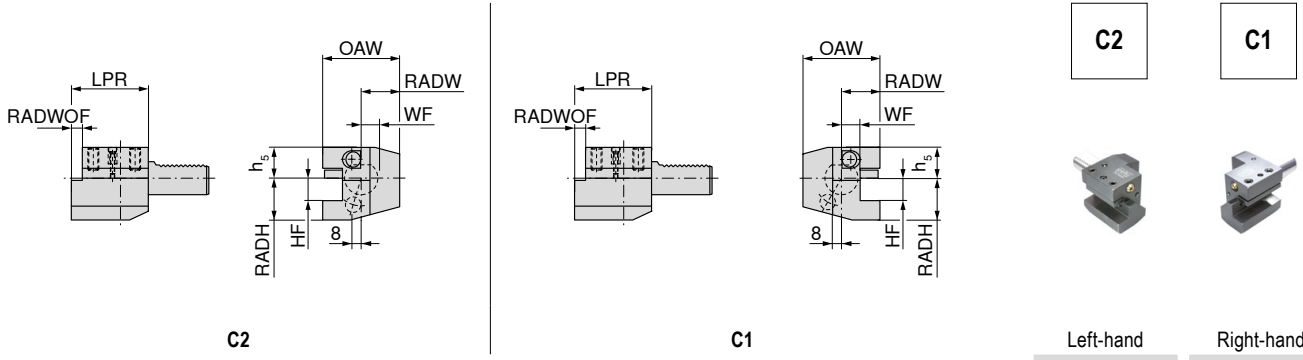


Adapter	HF <sub>0/-0,1</sub> mm	OAW mm	RADW mm	WF <sub>0/+0,3</sub> mm	h <sub>5</sub> mm	RADH mm	LPR mm
VDI 16	12	43	24,0	13,0	20,0	22	44
VDI 20	16	65	40,0	25,5	25,0	30	50
VDI 20	16	65	40,0	26,0	25,0	30	50
VDI 30	20	76	41,0	23,0	28,0	38	70
VDI 30	20	70	35,0	17,0	28,0	38	70
VDI 40	25	85	42,5	20,5	32,5	48	85
VDI 40	25	90	47,5	25,5	32,5	48	85
VDI 50	32	105	55,0	30,5	35,0	60	100
VDI 50	32	100	50,0	25,5	35,0	60	100

1) Height adjustable +/- 1 mm

Left-hand	Right-hand
82 214 ...	82 211 ...
	160
200	202 <sup>1)</sup>
	201
300	300
400	400
500	500

### Axial tool holders, overhead

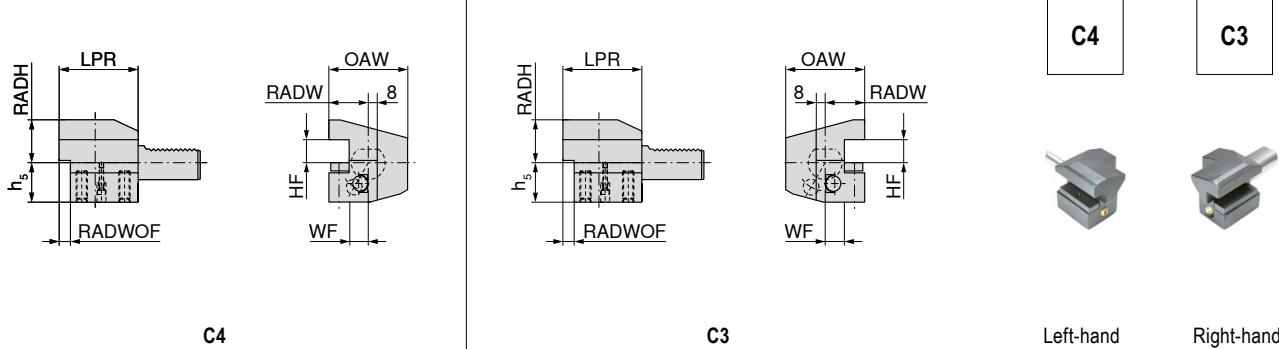


Adapter	HF <sub>0/-0,1</sub> mm	OAW mm	RADW mm	WF <sub>0/+0,3</sub> mm	h <sub>5</sub> mm	RADH mm	LPR mm
VDI 16	12	43	24,0	13,0	20,0	22	44
VDI 20	16	65	40,0	25,5	30,0	25	50
VDI 20	16	65	40,0	26,0	25,0	30	50
VDI 20	16	65	40,0	25,5	25,0	30	50
VDI 30	20	70	35,0	17,0	35,0	38	70
VDI 30	20	76	41,0	23,0	35,0	38	70
VDI 40	25	85	42,5	20,5	42,5	48	85
VDI 40	25	90	47,5	25,5	42,5	48	85
VDI 50	32	100	50,0	25,5	50,0	60	100
VDI 50	32	105	55,0	30,5	50,0	60	100

1) Height adjustable +/- 1 mm


Left-hand	Right-hand
82 220 ...	82 217 ...
	160
200	202 <sup>1)</sup>
201 <sup>1)</sup>	201
300	300
400	400
500	500

You can find spare parts on → Page 266


## Multiple tool holders

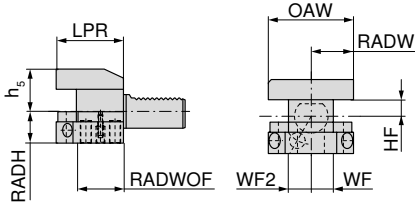

D2

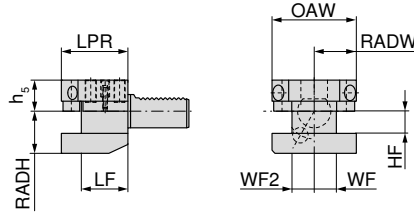

D1




Adapter	HF <sub>0/-0,1</sub> mm	RADW mm	WF <sub>0/+0,3</sub> mm	WF2 <sub>0/+0,3</sub> mm	OAW mm	h <sub>5</sub> mm	RADH mm	LF <sub>0/+0,5</sub> mm	LPR mm
VDI 30	20	35,0	17,0	23,0	76	28,0	38	42	60
VDI 30	20	35,0	17,0	23,0	76	35,0	38	42	60
VDI 40	25	42,5	20,5	25,5	90	32,5	48	50	72
VDI 40	25	42,5	20,5	25,5	90	42,5	48	50	72

82 224 ...	82 222 ...
	300
300	
	400
400	

## Cylindrical tool holders

- ▲ for tools with cylindrical shank to DIN 6535 and DIN 1835 Form E (Whistle Notch)
- ▲ Coolant supply either centrally through the tool or via the adjustable ball spray nozzles

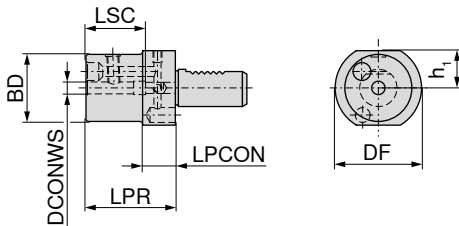

E



Cooling through nozzle



Adapter	DCONWS mm	DF mm	BD mm	h <sub>1</sub> mm	LPR mm	LPCON mm	LSC mm
VDI 20	6	50	45	23,0	60	22	40
VDI 20	8	50	45	23,0	60	22	40
VDI 20	10	50	45	23,0	60	22	44
VDI 20	12	50	45	23,0	60	22	49
VDI 20	14	50	45	23,0	62	22	49
VDI 20	16	50	45	23,0	67	22	52
VDI 20	18	50	45	23,0	67	22	52
VDI 20	20	50	45	23,0	67	22	52
VDI 30	6	68	52	28,0	67	22	35
VDI 30	8	68	52	28,0	67	22	35
VDI 30	10	68	52	28,0	67	22	39
VDI 30	12	68	52	28,0	67	22	44
VDI 30	14	68	52	28,0	67	22	44
VDI 30	16	68	52	28,0	67	22	47
VDI 30	18	68	52	28,0	67	22	47
VDI 30	20	68	52	28,0	67	22	52
VDI 40	6	83	52	32,5	67	22	35
VDI 40	8	83	52	32,5	67	22	35
VDI 40	10	83	52	32,5	67	22	39
VDI 40	12	83	52	32,5	67	22	44
VDI 40	14	83	52	32,5	67	22	44
VDI 40	16	83	52	32,5	67	22	47
VDI 40	18	83	52	32,5	67	22	47
VDI 40	20	83	52	32,5	67	22	52

83 269 ...
206
208
210
212
214
216
218
220
306
308
310
312
314
316
318
320
406
408
410
412
414
416
418
420

# Cylindrical tool holders for indexable insert drills

▲ for drilling tools with internal coolant supply

E1



AD

82 274 ...


Adapter	DCONWS <sub>H6</sub> mm	DF mm	BD mm	h <sub>1</sub> mm	LPR mm	LPCON mm	LSC mm	
VDI 20	16	50	36	23,0	67	18	54	200
VDI 20	20	50	40	23,0	67	18	54	201
VDI 20	25	50	45	23,0	71	18	59	202
VDI 30	16	68	36	28,0	67	22	54	300
VDI 30	20	68	40	28,0	67	22	54	301
VDI 30	25	68	45	28,0	71	22	59	302
VDI 30	32	68	52	28,0	75	22	63	303
VDI 30	40	68	60	28,0	87	22	73	304
VDI 40	16	83	36	32,5	67	22	54	400
VDI 40	20	83	40	32,5	67	22	54	401
VDI 40	25	83	45	32,5	75	22	59	402
VDI 40	32	83	52	32,5	75	22	63	403
VDI 40	40	83	60	32,5	90	22	73	404
VDI 50	20	98	40	35,0	80	30	54	500
VDI 50	25	98	45	35,0	80	30	59	501
VDI 50	32	98	52	35,0	80	30	63	502
VDI 50	40	98	60	35,0	90	30	73	503
VDI 50	50	98	70	35,0	100	30	83	504



You can find spare parts on → Page 266

# Boring bar holder

- ▲ for turning tools with cylindrical shank
- ▲ Coolant supply either through the tool or via the ball-shaped spray nozzle

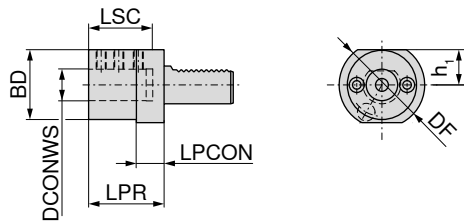

E2



Cooling through nozzle

82 268 ...


Adapter	DCONWS <sub>H7</sub> mm	DF mm	BD mm	h <sub>1</sub> mm	LPR mm	LPCON mm	LSC mm	
VDI 16	6	40	32	18,0	44	13	34	160 <sup>1)</sup>
VDI 16	8	40	32	18,0	44	13	34	161 <sup>1)</sup>
VDI 16	10	40	32	18,0	44	13	34	162 <sup>1)</sup>
VDI 16	12	40	40	18,0	44	13	34	163 <sup>1)</sup>
VDI 16	16	40	40	18,0	44	13	34	164 <sup>1)</sup>
VDI 20	8	50	40	23,0	50	18	41	200
VDI 20	10	50	40	23,0	50	18	41	201
VDI 20	12	50	40	23,0	50	18	41	202
VDI 20	16	50	40	23,0	50	18	41	203
VDI 20	20	50	50	23,0	50	18	41	204
VDI 20	25	50	50	23,0	60	18	51	205
VDI 30	8	68	55	28,0	60	22	51	300
VDI 30	10	68	55	28,0	60	22	51	301
VDI 30	12	68	55	28,0	60	22	51	302
VDI 30	16	68	55	28,0	60	22	51	303
VDI 30	20	68	55	28,0	60	22	51	304
VDI 30	25	68	55	28,0	60	22	51	305
VDI 30	32	68	68	28,0	75	22	61	306
VDI 40	8	83	55	32,5	75	22	61	400
VDI 40	10	83	55	32,5	75	22	61	401
VDI 40	12	83	55	32,5	75	22	61	402
VDI 40	16	83	55	32,5	75	22	61	403
VDI 40	20	83	55	32,5	75	22	61	404
VDI 40	25	83	55	32,5	75	22	61	405
VDI 40	32	83	83	32,5	75	22	61	406
VDI 40	40	83	83	32,5	90	22	76	407
VDI 50	12	98	68	35,0	90	30	76	500
VDI 50	16	98	68	35,0	90	30	76	501
VDI 50	20	98	68	35,0	90	30	76	502
VDI 50	25	98	68	35,0	90	30	76	503
VDI 50	32	98	68	35,0	90	30	76	504
VDI 50	40	98	98	35,0	90	30	76	505
VDI 50	50	98	98	35,0	100	30	86	506

1) Coolant supply through pipe joint

You can find spare parts on → **Page 266**

## ER Collet chucks

E4

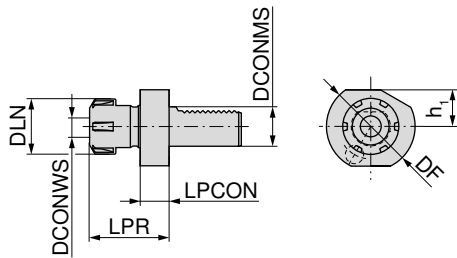

82 286 ...


Adapter	DCONWS mm	DF mm	DLN mm	h <sub>1</sub> mm	LPR mm	LPCON mm	for collet	
VDI 16	1 - 10	40	28	18,0	43,5	14	426E (ER16)	160
VDI 16	1 - 13	40	34	18,0	44,0	14	428E (ER20)	161
VDI 20	1 - 16	50	42	23,0	57,0	18	430E (ER25)	202
VDI 20	2 - 20	50	50	23,0	62,0	18	470E (ER32)	203
VDI 30	1 - 16	68	42	28,0	57,0	22	430E (ER25)	300
VDI 30	2 - 20	68	50	28,0	75,0	22	470E (ER32)	301
VDI 40	1 - 16	83	42	32,5	75,0	22	430E (ER25)	400
VDI 40	2 - 20	83	50	32,5	75,0	22	470E (ER32)	401
VDI 40	3 - 26	83	63	32,5	75,0	22	472E (ER40)	402
VDI 50	2 - 20	94	50	35,0	75,0	30	470E (ER32)	500
VDI 50	3 - 26	94	63	35,0	63,0	30	472E (ER40)	501

ER collets can be found on → **Pages 268–279.**

## Morse taper adapters

▲ For taper shanks with ejector tang

F1


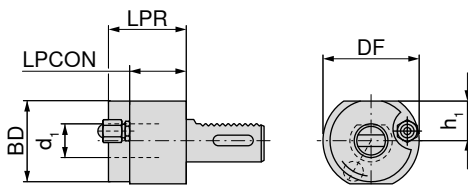


82 277 ...



Adapter	d <sub>1</sub>	BD mm	DF mm	h <sub>1</sub> mm	LPR mm	LPCON mm	
VDI 20	MK1		50	23,0	23		200
VDI 20	MK2		50	23,0	87		201
VDI 30	MK1		68	28,0	27		300
VDI 30	MK2		68	28,0	27		301
VDI 30	MK3	58	68	28,0	55	40	302
VDI 40	MK2	55	83	32,5	36	22	401
VDI 40	MK3	58	83	32,5	36	22	402
VDI 40	MK4	68	83	32,5	80	22	403
VDI 50	MK2	55	98	35,0	36	30	500
VDI 50	MK3	58	98	35,0	36	30	501
VDI 50	MK4	68	98	35,0	50	30	502

## Parting blade holders, height adjustable

- ▲ Vertical adjustment  $\pm 1$  mm
- ▲ Suitable for internal cooling through the parting blade (DC)
- ▲ axially parallel, adjustable external coolant supply



left





right





Adapter	OAW mm	RADW mm	HF mm	h <sub>s</sub> mm	RADH mm	LF mm	LPR mm	Left-hand		Right-hand	
								82 237 ...	82 236 ...		
VDI 30	70	35,0	26	28,0	38	44	49	300		300	
VDI 30	70	35,0	32	30,5	38	44	49	302		302	
VDI 40	73	42,5	26	32,0	48	44	49	040		040	
VDI 40	85	42,5	32	32,0	48	44	49	400		400	

## Parting blade holders, height adjustable, overhead

- ▲ Vertical adjustment  $\pm 1$  mm
- ▲ Suitable for internal cooling through the parting blade (DC)
- ▲ axially parallel, adjustable external coolant supply



left




right




Adapter	OAW mm	RADW mm	HF mm	h <sub>s</sub> mm	RADH mm	LF mm	LPR mm	Left-hand		Right-hand	
								82 243 ...	82 242 ...		
VDI 30	70	35,0	26	34,0	38	44	49	300		300	
VDI 30	70	35,0	32	30,5	38	44	49	302		302	
VDI 40	73	42,5	26	32,0	48	44	49	040		040	
VDI 40	85	42,5	32	32,0	48	44	49	400		400	

## Parting blade holders, height adjustable

- ▲ Vertical adjustment  $\pm 1$  mm
- ▲ Suitable for internal cooling through the parting blade (DC)
- ▲ axially parallel, adjustable external coolant supply

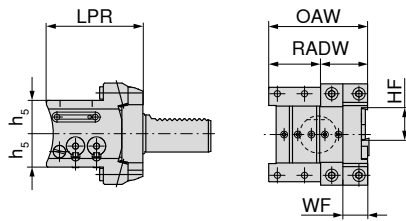

Universal-overhead

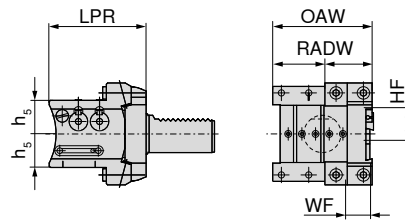

Universal



Universal-overhead


Universal

Adapter	OAW mm	RADW mm	HF mm	h <sub>s</sub> mm	WF mm	LPR mm
VDI 30	80	40	26	27	20	78
VDI 40	80	40	26	27	20	88
VDI 40	80	40	32	32	20	88


82 244 ...	82 238 ...
300	300
400	400
402	402

## Parting blade holder


- ▲ doubles = reciprocally interlocked VDI shank

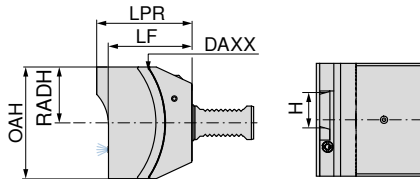

double – overhead

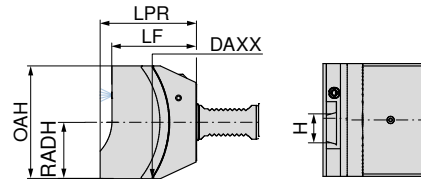

double




double – overhead

double

Adapter	LPR mm	LF mm	OAH mm	RADH mm	OAW mm	RADW mm	WF mm	DAXX mm	H mm
VDI 20	85,5	75	94	47	85	60	15,5	176	26
VDI 30	85,5	75	100	50	95	60	15,5	176	32
VDI 30	85,5	75	100	50	95	60	15,5	176	26
VDI 40	88,5	78	100	50	95	60	15,5	176	32
VDI 40	88,5	78	100	50	95	60	15,5	176	26

83 227 ...	83 226 ...
02629 <sup>1)</sup>	02629 <sup>1)</sup>
03227 <sup>1)</sup>	03227 <sup>1)</sup>
02627 <sup>1)</sup>	02627 <sup>1)</sup>
03226 <sup>1)</sup>	03226 <sup>1)</sup>
02626 <sup>1)</sup>	02626 <sup>1)</sup>

1) Not ex-stock

 With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).




## Short drill chuck – NC 2010

- ▲ Coolant supply via 3 adjustable ball-shaped spray nozzles in the housing
- ▲ Independent of direction of rotation

### Scope of supply:

Basic body including chuck key SW 4

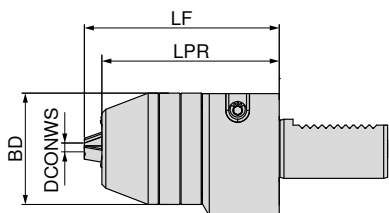


84 297 ...

Adapter	DCONWS mm	BD mm	LPR mm	LF mm	
VDI 20	0,5 - 10	48,5	40	50	210 <sup>1)</sup>
VDI 30	0,5 - 13	56,5	90	99	313
VDI 30	2,5 - 16	56,5	90	99	316
VDI 40	0,5 - 13	56,5	90	99	413
VDI 40	2,5 - 16	56,5	90	99	416

1) Without Through Coolant

## Quick-change tap chucks GSF

▲ LZD = Length compensation under tension and compression

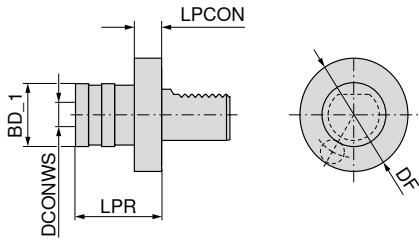

Adapter	cutting range	SZID	DCONWS mm	BD_1 mm	LPR mm	LZD± mm
VDI 20	M3 - M12	01	19	38	55	9
VDI 30	M3 - M12	01	19	38	55	9
VDI 40	M3 - M12	01	19	38	55	9
VDI 20	M6 - M20	02	31	55	77	15
VDI 30	M6 - M20	02	31	55	77	15
VDI 40	M6 - M20	02	31	55	77	15

83 307 ...

112  
312  
412  
  
120  
320  
420



Quick change adapters can be found on → [Page 288–292](#).

## HyTens – Turn

- ▲ Hydraulic chuck
- ▲ For the hydraulic clamping of cylindrical tool shanks tol. h6, boring bars and cylindrical tool holders tol. h7, g6 in fixed base holders
- ▲ One screw for locking the boring bar
- ▲ High-precision clamping with a repeatability of 3 µm

### Scope of supply:

Base body with backstop screw and pressure screw

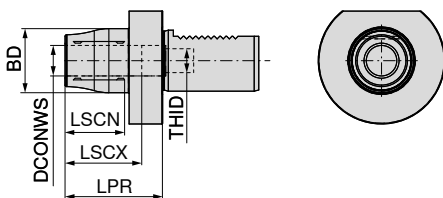

AD

83 402 ...

Adapter	DCONWS mm	BD mm	LPR mm	LSCX mm	LSCN mm	THID
VDI 30	20	42	64	51	41	M16x1
VDI 40	20	42	64	51	41	M16x1

02027  
02026



Stop screw IK

83 950 ...

Spare parts  
DCONWS


20

M16x1x31 - SW5

48700

## Test arbors

▲ Radial run-out ≤ 0.02 mm

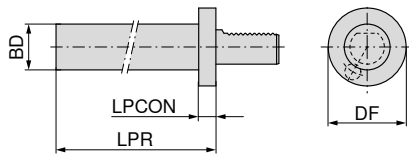


83 324 ...

Adapter	BD <sub>H5</sub> mm	DF mm	LPR mm	LPCON mm
VDI 16	30	40	120	15
VDI 20	40	50	150	15
VDI 30	40	68	200	15
VDI 40	40	83	200	15
VDI 50	40	98	200	15

016  
020  
030  
040  
050

## Tool holders, rough machined, round

▲ Manufactured from C45

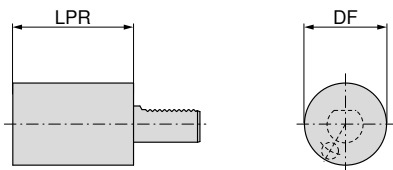

A2





82 330 ...

Adapter	LPR mm	DF mm
VDI 16	60	40
VDI 20	70	50
VDI 30	100	68
VDI 30	240	68
VDI 40	120	83
VDI 40	320	83
VDI 50	135	98
VDI 50	400	98

160  
200  
300  
303  
400  
403  
500  
502

## Boring bar holder, with offset, with through coolant

- ▲ doubles = reciprocally interlocked VDI shank
- ▲ external coolant supply available

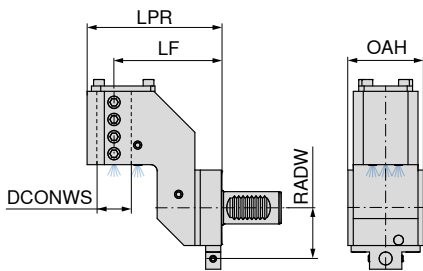

IC

double

83 229 ...

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm
VDI 25	25	99,5	75	30	40
VDI 30	32	125,0	100	70	47
VDI 40	40	133,0	100	85	56

02528<sup>1)</sup>

03227<sup>1)</sup>



04026<sup>1)</sup>

1) Not ex-stock

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

## Double boring bar holder with through coolant

- ▲ for use of two boring bars for main and sub-spindle machining
- ▲ external coolant supply available

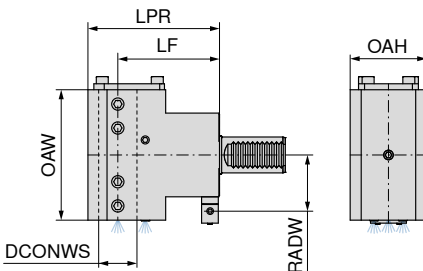

IC

83 230 ...

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm	OAW mm
VDI 25	25	99,5	75	54	40	104
VDI 30	32	110,0	85	62	47	109
VDI 30	32	125,0	100	62	47	118
VDI 40	40	152,0	120	76	56	116

02528<sup>1)</sup>

03227<sup>1)</sup>

13227<sup>1)</sup>



04026<sup>1)</sup>

1) Not ex-stock

With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

## Boring bar holder with through coolant

▲ external coolant supply available

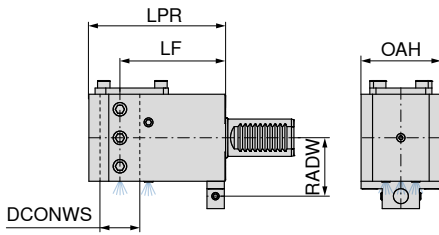

IC

83 228 ...

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm
VDI 25	25	100	75	60	40
VDI 30	32	110	85	64	47
VDI 30	32	125	100	64	47
VDI 40	40	130	100	76	56
VDI 40	40	152	120	76	56
VDI 50	50	155	120	98	64

02528<sup>1)</sup>

03227<sup>1)</sup>


13227<sup>1)</sup>

04026<sup>1)</sup>

14026<sup>1)</sup>


05025<sup>1)</sup>

1) Not ex-stock

 With star turrets, there is the danger of a collision for failure to comply to the machine-default nominal maximum height (LPR).

## 90° VDI to VDI adapter, double sided

▲ for rotating toolholder

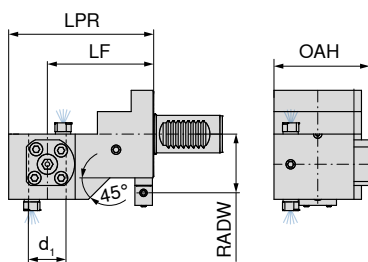

IC

83 225 ...

Adapter	DCONWS mm	LPR mm	LF mm	OAH mm	RADW mm
VDI 25	25	104	75	38,0	40
VDI 25	20	104	75	67,5	40
VDI 30	30	116	85	76,5	47
VDI 30	30	131	100	76,5	47
VDI 40	40	133	100	89,0	56
VDI 40	40	153	120	89,0	56

02528<sup>1)</sup>

02028<sup>1)</sup>

03027<sup>1)</sup>

13027<sup>1)</sup>



04026<sup>1)</sup>

14026<sup>1)</sup>

1) Not ex-stock

## 90° VDI to PSC adapter

Scope of supply:  
including pull stud

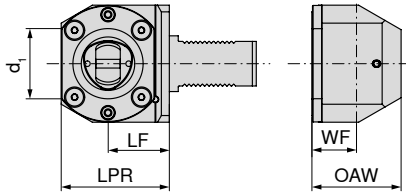


90°  
83 231 ...

Adapter	d <sub>1</sub>	LF mm	LPR mm	WF mm	OAW mm	
VDI 30	PSC 40	41	65	21	56	04027 <sup>1)</sup>
VDI 40	PSC 40	51	75	30	86	04026 <sup>1)</sup>
VDI 40	PSC 50	53	85	40	80	05026 <sup>1)</sup>
VDI 40	PSC 63	53	95	40	80	06326 <sup>1)</sup>
VDI 50	PSC 50	53	85	40	80	05025 <sup>1)</sup>
VDI 50	PSC 63	55	97	40	80	06325 <sup>1)</sup>

1) Not ex-stock

## VDI to PSC adapter

Scope of supply:  
including pull stud

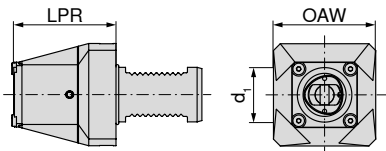

83 232 ...

Adapter	d <sub>1</sub>	LPR mm	OAW mm	
VDI 30	PSC 40	70	60	04027 <sup>1)</sup>
VDI 40	PSC 40	75	75	04026 <sup>1)</sup>
VDI 40	PSC 50	85	82	05026 <sup>1)</sup>
VDI 40	PSC 63	90	105	06326 <sup>1)</sup>
VDI 50	PSC 50	85	91	05025 <sup>1)</sup>
VDI 50	PSC 63	100	105	06325 <sup>1)</sup>

1) Not ex-stock



### Accessories



Pull stud PSC

→ 176

## 90° VDI to HSK-T adapter


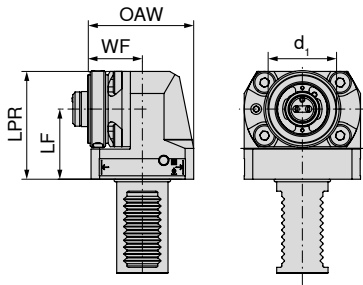


90°  
**83 233 ...**

Adapter	d <sub>1</sub>	LF mm	LPR mm	WF mm	OAW mm	
VDI 30	HSK-T 40	41	65	25	60	<b>04027<sup>1)</sup></b>
VDI 40	HSK-T 40	51	75	34	90	<b>04026<sup>1)</sup></b>
VDI 40	HSK-T 63	53	90	45	85	<b>06326<sup>1)</sup></b>
VDI 50	HSK-T 63	55	97	45	85	<b>06325<sup>1)</sup></b>

1) Not ex-stock

## VDI to HSK-T adapter



**83 234 ...**

Adapter	d <sub>1</sub>	LPR mm	OAW mm	
VDI 30	HSK-T 40	74	60	<b>04027<sup>1)</sup></b>
VDI 40	HSK-T 40	79	75	<b>04026<sup>1)</sup></b>
VDI 40	HSK-T 63	95	105	<b>06326<sup>1)</sup></b>
VDI 50	HSK-T 63	105	105	<b>06325<sup>1)</sup></b>

1) Not ex-stock


## Bar pullers for disc turrets, radial

▲ Two adjustable, spring-mounted, replaceable grippers are fitted to the main body. Each of these is equipped with a carbide insert. The grippers are set to a slightly smaller diameter than the bar and then pressed onto the bar in an axial direction (x axis) by the tool turret.

▲ GA = Gripper set

### Scope of supply:

Bar puller incl. GA 1 for VDI 16, and GA 3 from VDI 20

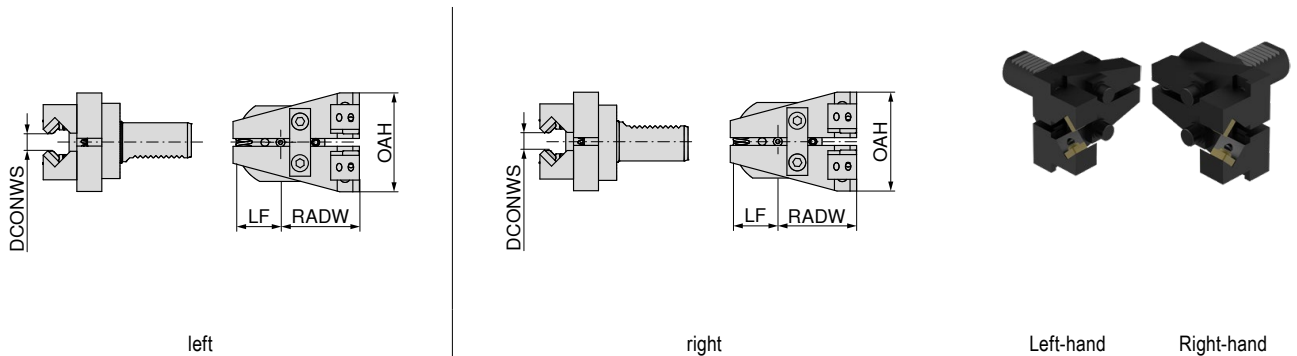

Adapter	DCONWS mm	LF mm	OAH mm	RADW mm	GA	Left-hand 80 309 ...	Right-hand 80 306 ...
VDI 16	2 - 22	28	74	35	1		01600
VDI 20	2 - 42	34	85	61	3		02000
VDI 30	2 - 42	34	105	61	3 - 4	03000	03000
VDI 40	2 - 65	34	125	61	3 - 4	04000	04000

## Bar pullers for star turrets

▲ Two adjustable, spring-mounted, replaceable grippers are fitted to the main body. Each of these is equipped with a carbide insert. The grippers are set to a slightly smaller diameter than the bar and then pressed onto the bar in an axial direction (x axis) by the tool turret.

▲ 90° angle head

▲ GA = Gripper set

### Scope of supply:

Bar puller with GA 3





Adapter	DCONWS mm	LF mm	LPR mm	WF mm	GA	Left-hand 80 310 ...
VDI 30	2 - 42	122,5	129	37,0	3 - 4	03000
VDI 40	2 - 65	142,5	149	41,5	3 - 4	04000



## Gripper accessories


- ▲ For bar pullers 80 306 ... / 80 309 ... / 80 310 ...
- ▲ Price per pair




80 312 ...

GA	DCONWS mm	OAL mm	OAW mm	OAH mm	
1	2 - 22	24,5	13	58	12200
3	2 - 42	26,0	22	86	14200
4	42 - 65	29,5	22	102	16500

## Protection plugs

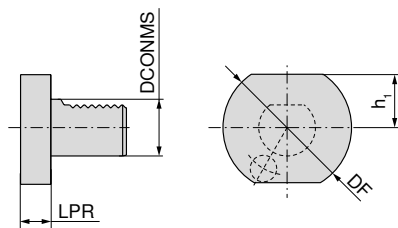

Steel

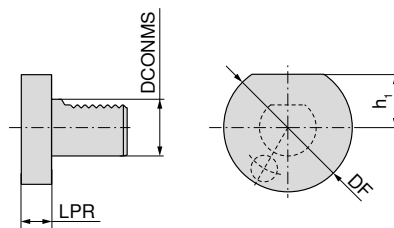

Plastic





Steel

Plastic

DCONMS <sub>h8</sub> mm	DF mm	h <sub>1</sub> mm	LPR mm	82 317 ...	83 318 ...
16	40	18,0	16	160	160
20	50	23,0	16	200	200
30	68	28,0	16	300	300
40	83	32,5	20	400	400
50	98	35,0	20	500	500

## Doosan/Spinner – BMT 45 – Axial square section tool holder

▲ directly screwed version

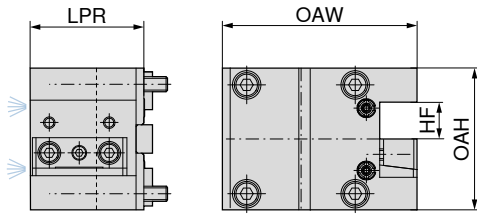


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 45	58 x 58	20	60	75	99,5

Left-hand	Left-hand
82 480 ... 00001	82 480 ... 00006

## Doosan/Spinner – BMT 45 – Radial square section tool holder

▲ directly screwed version

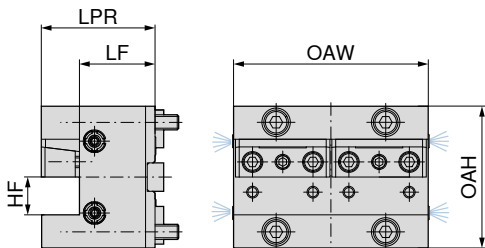


Adapter	Hole pattern	HF mm	LF mm	LPR mm	OAH mm	OAW mm
BMT 45	58 x 58	20	40	60	75	103
BMT 45	58 x 58	20	40	60	75	80

Left-hand	Left-hand
82 480 ... 01002	82 480 ... 01007

## Doosan/Spinner – BMT 45 – Multi square section tool holder

▲ directly screwed version


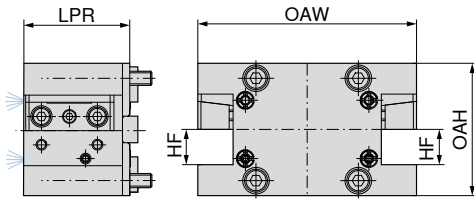


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 45	58 x 58	20	60	75	124

82 480 ...	82 480 ...
02003	02008

## Doosan/Spinner – BMT 45 – Combi tool holder

▲ directly screwed version

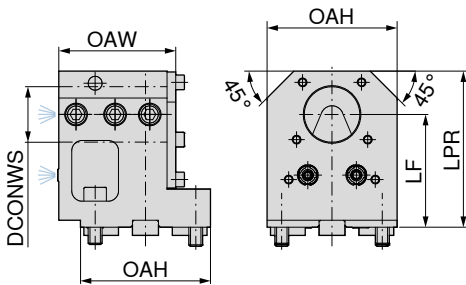



IC

Adapter	Hole pattern	DCONWS mm	LF mm	OAW mm	OAH mm	LPR mm
BMT 45	58 x 58	32	65	67,5	75	90
BMT 45	58 x 58	32	85	67,5	75	110

82 480 ...
03004
03005

## Doosan – BMT 55 – Axial square section tool holder

▲ directly screwed version


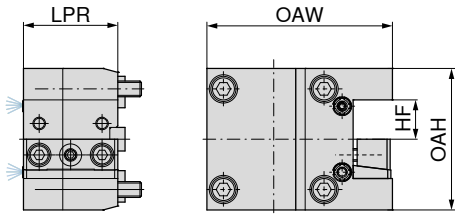


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 55	64 x 64	25	60	90	118

Left-hand	Left-hand
82 481 ...	82 481 ...
00001	00005

## Doosan – BMT 55 – Radial square section tool holder

▲ directly screwed version

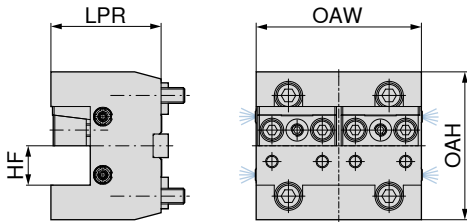


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 55	64 x 64	25	70	94	105
BMT 55	64 x 64	25	95	94	105

Left-hand	Left-hand
82 481 ...	82 481 ...
01002	01006

## Doosan – BMT 55 – Multi square section tool holder

▲ directly screwed version

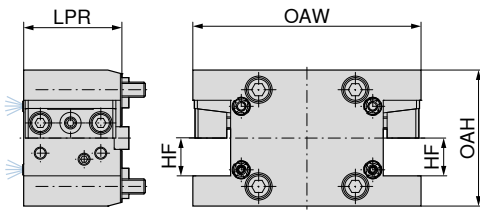


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 55	64 x 64	25	65	90	151
BMT 55	64 x 64	25	60	90	151

82 481 ...	82 481 ...
02003	02007

## Doosan – BMT 55 – Boring bar holder

▲ directly screwed version

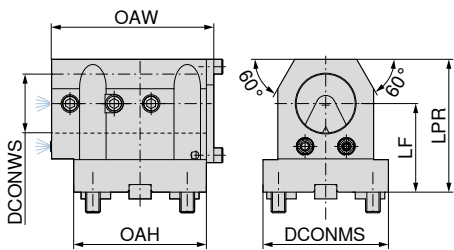



IC

Adapter	Hole pattern	DCONWS mm	LF mm	DCONMS mm	LPR mm	OAH mm	OAW mm
BMT55	64 x 64	40	60	85	90	90	110

82 481 ...
04004

## EMAG – BMT 55 – Axial square section tool holder

▲ directly screwed version


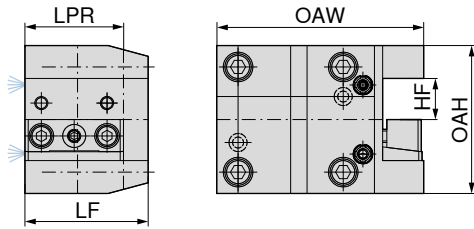


Adapter	Hole pattern	HF mm	LPR mm	LF mm	OAH mm	OAW mm
BMT 55	64 X 64	25	60	75	90	126

Left-hand	Left-hand
82 482 ... 00001	82 482 ... 00004

## EMAG – BMT 55 – Radial square section tool holder

▲ directly screwed version

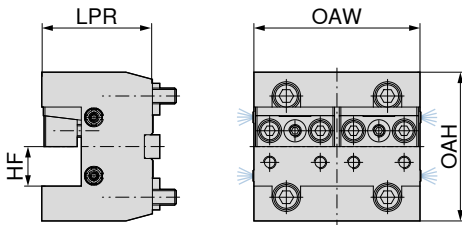


IC

Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 55	64 x 64	25	70	94	105

Left-hand
82 482 ... 01002

# EMAG – BMT 55 – Boring bar holder

▲ directly screwed version

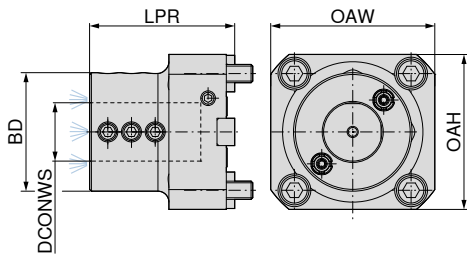

IC



82 482 ...

Adapter	Hole pattern	DCONWS mm	BD mm	LPR mm	OAW mm	OAH mm
BMT55	64 x 64	32	65	75	85	90

04003

## HAAS/Doosan – BMT 65 – Axial square section tool holder

▲ directly screwed version

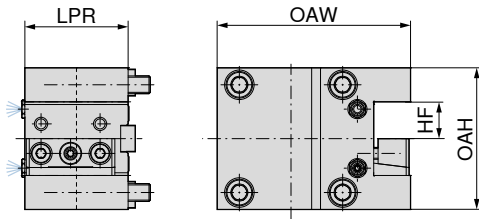


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 65	70 x 73	25	70	96	131
BMT 65	70 x 73	25	75	97	131

Left-hand	Left-hand
82 483 ...	82 483 ...
00001	00005

## HAAS/Doosan – BMT 65 – Radial square section tool holder

▲ directly screwed version

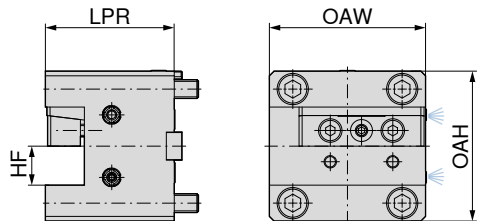


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 65	70 x 73	25	82,5	96	100

Right-hand	Right-hand
82 483 ...	82 483 ...
05002	05006



## HAAS/Doosan – BMT 65 – Multi square section tool holder

- ▲ directly screwed version
- ▲ For right and left direction of rotation

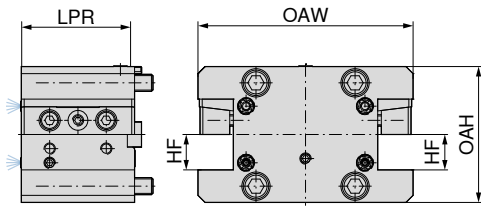



Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 65	70 x 73	25	80	96	152

82 483 ...  
02003

82 483 ...  
02007

## HAAS/Doosan – BMT 65 – Combi tool holder

- ▲ directly screwed version
- ▲ double-sided version

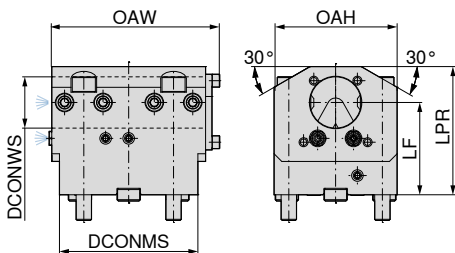


IC

Adapter	Hole pattern	DCONWS mm	LF mm	OAH mm	LPR mm	DCONMS mm	OAW mm
BMT 65	70 x 73	40	78	96	100	108	125

82 483 ...  
03004

## Mori/Seiki – BMT 40 – Axial square section tool holder

- ▲ directly screwed version
- ▲ For right and left direction of rotation


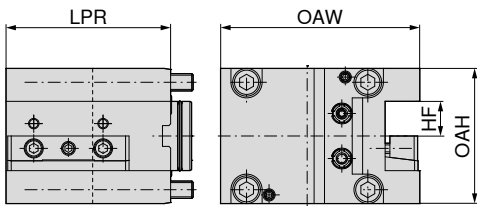


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 40	70 x 62	20	95	78	115

Left-hand	Left-hand
82 484 ... 00001	82 484 ... 00005

## Mori/Seiki – BMT 40 – Radial square section tool holder

- ▲ directly screwed version
- ▲ For right and left direction of rotation

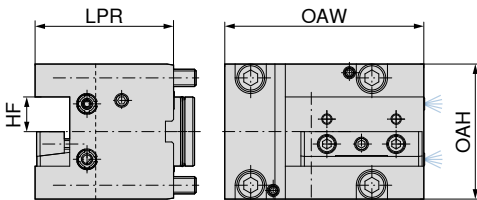


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 40	70 x 62	20	80	78	115

Left-hand	Left-hand
82 484 ... 01002	82 484 ... 01006

## Mori/Seiki – BMT 40 – Multi square section tool holder

- ▲ directly screwed version
- ▲ For right and left direction of rotation


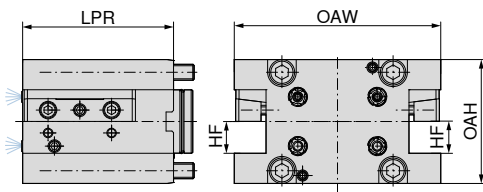


Adapter	Hole pattern	HF mm	LPR mm	OAH mm	OAW mm
BMT 40	70 x 62	20	95	78	130

82 484 ...	82 484 ...
02003	02007

## Mori/Seiki – BMT 40 – Combi tool holder

- ▲ directly screwed version

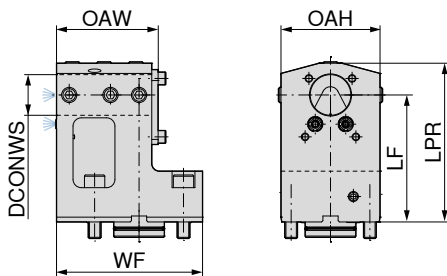



IC

Adapter	Hole pattern	DCONWS mm	OAH mm	OAW mm	LF mm	WF mm	LPR mm
BMT 40	70 x 62	32	78	80	100	115	125

82 484 ...
03004

## Mori/Seiki – BMT 60 – Axial square section tool holder



- ▲ directly screwed version
- ▲ For right and left direction of rotation

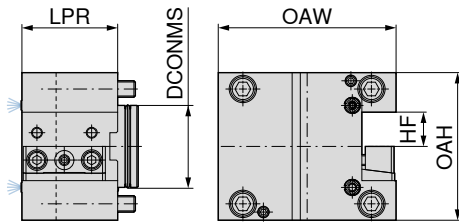

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	Left-hand 82 485 ...	Left-hand 82 485 ...
BMT 60	94 x 84	25	60	70	108	130	00001	00005

## Mori/Seiki – BMT 60 – Radial square section tool holder


- ▲ directly screwed version
- ▲ For right and left direction of rotation

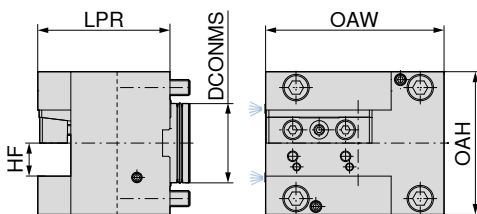

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	Left-hand 82 485 ...	Left-hand 82 485 ...
BMT 60	94 x 84	25	60	100	108	135	01002	01006

## Mori/Seiki – BMT 60 – Multi square section tool holder

- ▲ directly screwed version
- ▲ For right and left direction of rotation

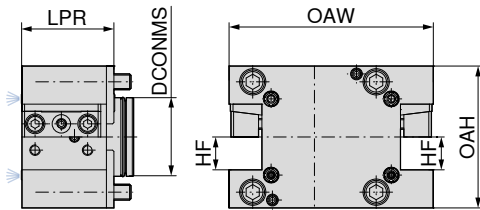


Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm
BMT 60	94 x 84	25	60	70	108	155,5

82 485 ...	82 485 ...
02003	02007

## Mori/Seiki – BMT 60 – Combi tool holder

- ▲ directly screwed version

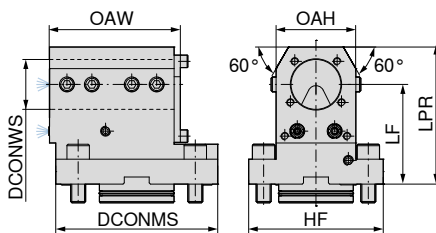



IC

Adapter	Hole pattern	DCONWS mm	OAH mm	LF mm	OAW mm	HF mm	LPR mm	DCONMS mm
BMT 60	94 x 84	40	64	80	105	108	110	130

82 485 ...
03004

## Mazak – BMT 68 – Axial square section tool holder


- ▲ directly screwed version
- ▲ For right and left direction of rotation

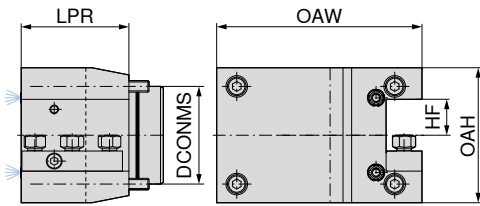

Adapter	Hole pattern	HF mm	DCONMS mm	LPR mm	OAH mm	OAW mm	Left-hand 82 486 ...	Left-hand 82 486 ...
BMT 68	110 x 68	25	68	75	94	143	00001	00005

## Mazak – BMT 68 – Radial square section tool holder



- ▲ directly screwed version
- ▲ For right and left direction of rotation

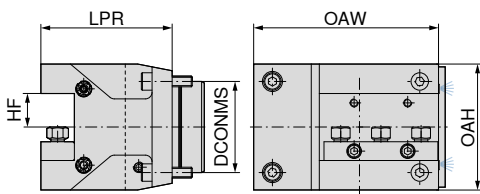

Adapter	Hole pattern	HF mm	DCONMS mm	OAH mm	LPR mm	OAW mm	Left-hand 82 486 ...	Left-hand 82 486 ...
BMT 68	110 x 68	25	68	94	98	143	01002	01006

# EMAG – BMT 68 – Multi square section tool holder

▲ directly screwed version

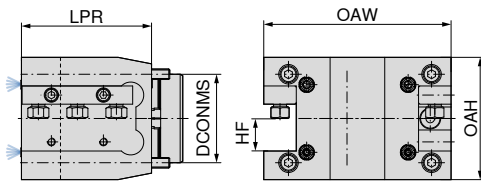



Adapter	Hole pattern	HF mm	DCONMS mm	OAH mm	LPR mm	OAW mm
BMT 68	110 x 68	25	68	94	100	144

82 486 ...  
02003

82 486 ...  
02007

# Mazak – BMT 68 – Combi tool holder

▲ directly screwed version

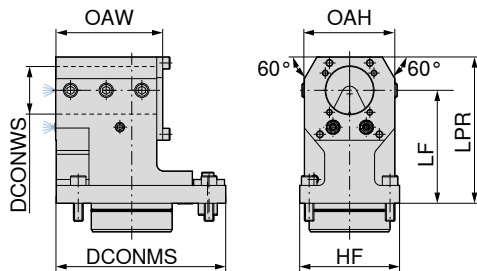

IC

Adapter	Hole pattern	DCONWS mm	OAH mm	HF mm	OAW mm	LF mm	LPR mm	DCONMS mm
BMT 68	110 x 68	40	76	84	90	95	123	142,5


82 486 ...  
03004

# Drill chuck

- ▲ For manual and key clamping
- ▲ Through-hardened and ground

**Scope of supply:**

Holder with clamping key

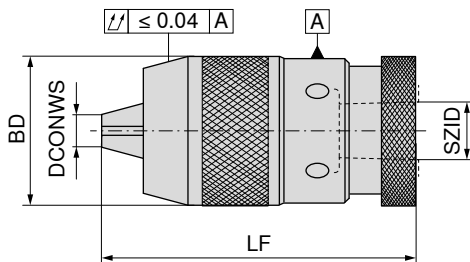

SZID	DCONWS mm	LF mm	BD mm	83 636 ...
B12	0 - 8	73	35	012
B12	0 - 10	92	43	112
B16	1 - 13	106	50	016
B16	3 - 16	110	57	116
B18	3 - 16	110	57	018



**Spare parts**  
DCONWS


0 - 8	008
0 - 10	010
1 - 13	013
3 - 16	016

83 302 ...



## Drill chuck adapter DIN 238


▲ Through-hardened and ground

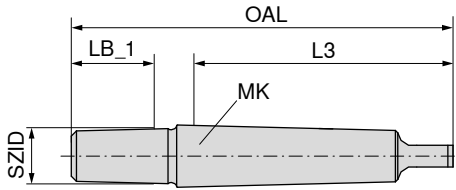

Adapter	SZID	$l_3$ mm	LB_1 mm	OAL mm	83 642 ...
MK1	B12	62,0	18,5	89,0	120
MK1	B16	62,0	24,0	97,0	160
MK1	B18	62,0	32,0	106,0	180
MK2	B12	75,0	18,5	106,5	121
MK2	B16	75,0	24,0	110,5	161
MK2	B18	75,0	32,0	117,5	181
MK3	B12	94,0	18,5	125,0	122
MK3	B16	94,0	24,0	134,0	162
MK3	B18	94,0	32,0	141,0	182
MK4	B16	117,5	24,0	159,0	163
MK4	B18	117,5	32,0	168,0	183
MK5	B16	149,5	24,0	196,0	164
MK5	B18	149,5	32,0	204,5	184

## Reduction sleeve DIN 2185

▲ Through-hardened, ground internally and externally

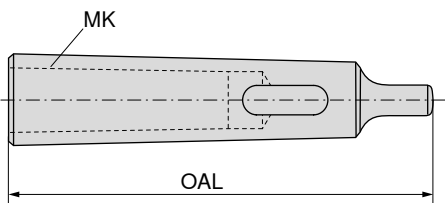


Adapter	$d_i$	OAL mm	83 644 ...
MK1	MK0	80	010
MK2	MK1	92	020
MK3	MK1	99	130
MK3	MK2	112	030
MK4	MK1	124	240
MK4	MK2	124	140
MK4	MK3	140	040
MK5	MK2	156	250
MK5	MK3	156	150
MK5	MK4	171	050

## Short drill chuck – NC 2010

- ▲ bidirectional
- ▲ Torque moment = 12 Nm
- ▲ with Morse taper

**Scope of supply:**

Holder with clamping key

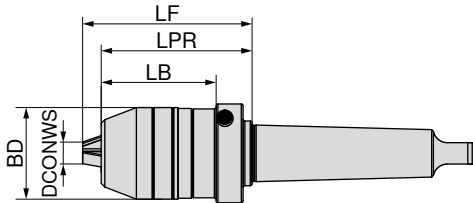

84 314 ...


Adapter	DCONWS mm	BD mm	LB mm	LPR mm	LF mm	
MK3	0,5 - 13	48,5	64	84	93,0	313
MK3	2,5 - 16	51,0	64	84	94,5	316
MK4	2,5 - 16	51,0	64	84	94,5	416

## Short drill chuck – NC 2010

- ▲ bidirectional
- ▲ Torque moment = 12 Nm
- ▲ with cylindrical shank

**Scope of supply:**

Holder with clamping key

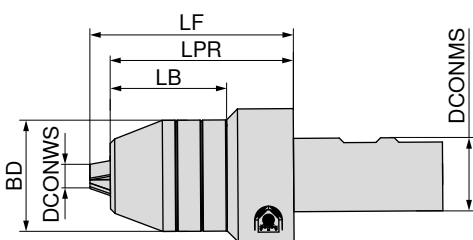


G 6,3 n<sub>max</sub> 10000

84 311 ...

DCONMS mm	DCONWS mm	BD mm	LB mm	LPR mm	LF mm	
25	0,5 - 13	48,5	50,9	80	89,0	213
32	0,5 - 13	48,5	50,9	80	89,0	313
32	2,5 - 16	51,0	50,9	80	90,5	316

# Synchro quick change tapping chuck with minimum length compensation

- ▲ For collets according to DIN 6499
- ▲ With length compensation under tension and under compression (LZD)
- ▲  $p_{max.} = 50 \text{ bar}$

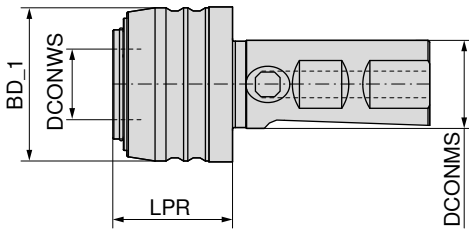

83 641 ...

DCONWS mm	cutting range	SZID	LPR mm	BD_1 mm	DCONMS mm	LZD± mm
20	M3 - M12	1	35	43,5	25	1,0 / 0,2
32	M6 - M20	2	56	60,0	25	1,0 / 0,2


012  
020

# Insert for synchro quick change tapping chuck with minimum length compensation

- ▲ SZID = for insert size

**Scope of supply:**

Includes lock nut

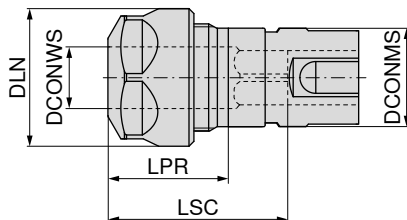

83 608 ...

SZID	DCONWS mm	cutting range	LPR mm	DLN mm	LSC mm	for collet	DCONMS mm
1	2 - 10	M3 - M12	24	28	42	426E (ER16)	20
2	2 - 16	M6 - M20	28	42	59	430E (ER25)	32

012 <sup>1)</sup>  
020

1) with 6 position lock nut



Lock nut



Lock nut IK



Lock nut



Y clamping key

62 950 ...

83 950 ...

62 950 ...


83 357 ...

**Spare parts for Article no.**

83 608 012	M22x1,5 - SW25	044	M22x1,5	054	M22x1,5	054	116
83 608 020			M32x1,5	055	M32x1,5	055	125

## Quick change tap chuck with length compensation

- ▲ With cylindrical shank
- ▲ With length compensation under tension and compression (LZD)
- ▲ Quick change adapters

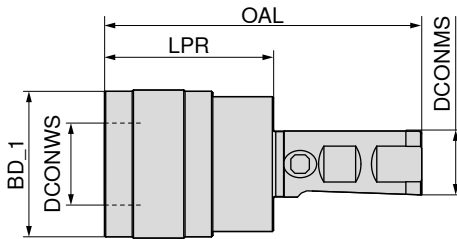


83 648 ...

DCONMS mm	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	OAL mm	LZD± mm	
20	M3 - M12	01	41	38	19	91	9	112
20	M6 - M20	02	63	55	31	138	15	120
25	M3 - M12	01	41	38	19	97	9	212
25	M6 - M20	02	63	55	31	119	15	220
32	M3 - M12	01	41	38	19	102	9	312
32	M6 - M20	02	63	55	31	124	15	320

## DIN 228B – Quick change tap chuck with length compensation

- ▲ With Morse taper shank
- ▲ With length compensation under tension and compression (LZD)

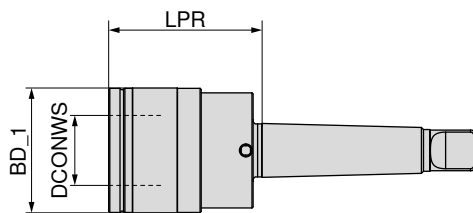

83 646 ...

Adapter	cutting range	SZID	LPR mm	BD_1 mm	DCONWS mm	LZD± mm	
MK 2	M3 - M12	01	46	38	19	9	212
MK 3	M3 - M12	01	46	38	19	9	312
MK 3	M6 - M20	02	69	55	31	15	320
MK 4	M6 - M20	02	70	55	31	15	420

### Accessories





Collet

→ 288, 290-292

## Clamping sleeve for taps in Weldon chucks

- ▲ For machines with rigid tapping
- ▲ For safe clamping of taps

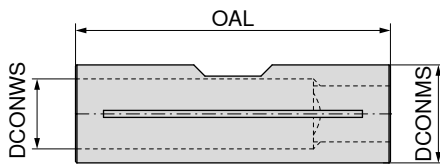


DCONWS <sub>H7</sub>	DCONMS <sub>H6</sub>	OAL	80 699 ...
mm	mm	mm	
3,5	6	26	03500
4,0	8	32	04000
4,5	8	26	04500
6,0	10	30	06000
7,0	10	31	07000
8,0	12	38	08000
9,0	12	38	09000
10,0	14	42	10000
11,0	14	42	11000
12,0	16	44	12000
14,0	18	45	14000
16,0	20	46	16000

## Shrink fit extension

- ▲ For solid carbide and HSS shanks with h6 tolerance or better
- ▲ DRVS = Key size of the adjustment screw

TG

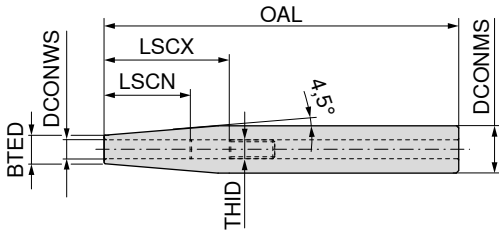

84 310 ...

DCONMS <sub>h6</sub>	DCONWS	BTED	OAL	LSCX	LSCN	THID	DRVS	
mm	mm	mm	mm	mm	mm		mm	
12	3	8	150					003
12	4	8	150					004
12	5	10	150					005
12	6	10	150	36	26	M5	2,5	006
16	3	10	150					103
16	4	10	150					104
16	5	10	150					105
16	6	10	150	36	26	M5	2,5	106
16	8	12	150	36	26	M6	3,0	108
20	3	10	150					203
20	4	10	150					204
20	5	10	150					205
20	6	10	150	36	26	M5	2,5	206
20	8	12	150	36	26	M6	3,0	208
20	10	14	150	42	32	M8x1	3,0	210
20	12	16	150	47	37	M10x1	5,0	212
25	3	10	150					303
25	4	10	150					304
25	5	15	150					305
25	6	20	150	36	26	M5	2,5	306
25	8	20	150	36	26	M6	3,0	308
25	10	20	150	42	32	M8x1	3,0	310
25	12	20	150	47	37	M10x1	5,0	312
25	14	20	150	47	37	M10x1	5,0	314
25	16	22	150	50	40	M10x1	5,0	316
32	6	20	150	36	26	M5	2,5	406
32	8	20	150	36	26	M6	3,0	408
32	10	24	150	42	32	M8x1	3,0	410
32	12	24	150	47	37	M10x1	5,0	412
32	14	27	150	47	37	M10x1	5,0	414
32	16	27	150	50	40	M10x1	5,0	416
32	18	27	150	50	40	M10x1	5,0	418
32	20	27	150	52	42	M10x1	5,0	420



Observe the minimum clamping depth on → Page 312.

# HyTens – Turn

- ▲ Hydraulic chuck with cylindrical shank
- ▲ For the hydraulic clamping of cylindrical tool shanks tol. h6, boring bars and cylindrical tool holders tol. h7, g6 in fixed base holders
- ▲ One screw for locking the boring bar
- ▲ With length setting screw – can also be removed, to enable the boring bar to be slid through
- ▲ High-precision clamping with a repeatability of 3 µm

**Scope of supply:**

Base body with backstop screw and pressure screw

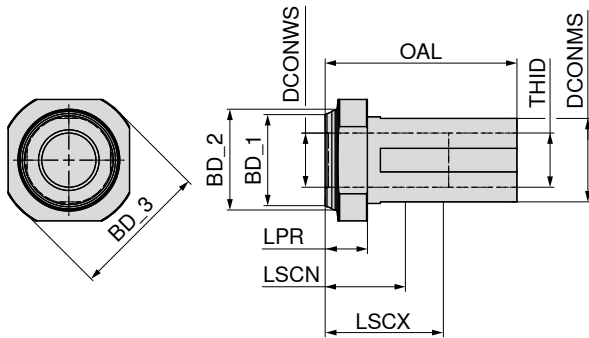

**83 402 ...**

DCONMS	DCONWS	BD_1	BD_2	BD_3	LPR	OAL	LSCX	LSCN	THID	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
32	16	38	41	59	19,5	78,5	51	41	M22x1	31699
32	20	38	41	59	19,5	78,5	51	41	M22x1	32099
40	16	43	46	64	19,5	88,5	51	41	M22x1	41699
40	20	43	46	64	19,5	88,5	51	41	M22x1	42099
40	25	43	46	64	19,5	88,5	57	47	M27x1	42599



Stop screw IK

**83 950 ...**

**Spare parts**  
**DCONWS**


16 - 20	48500
25	48600

# Hydraulic expansion extension especially for Hydraulic Chucks

▲ For solid carbide and HSS shanks with h6 tolerance or better

### Scope of supply:

Base body with backstop screw and pressure screw

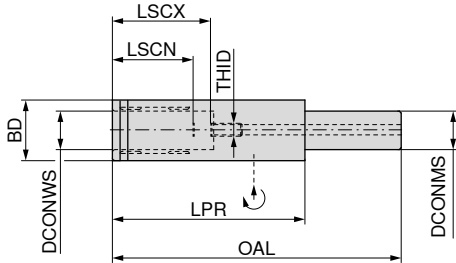

G 2,5 n<sub>max</sub> 25000

**84 313 ...**

DCONMS	DCONWS	BD	LPR	OAL	LSCX	LSCN	THID	
mm	mm	mm	mm	mm	mm	mm		
20	12	25,0	100	150	46	36	M6	112
20	20	31,5	100	150	51	41	M10x1	120
32	20	31,5	90	150	51	41	M10x1	132
32	20	31,5	90	200	51	41	M10x1	232

Observe the minimum clamping depth on → **Page 312.**



**83 950 ...**

### Spare parts for Article no.

84 313 112	M6x12,5 - SW3	419
84 313 120	M10x1x13,5 - SW5	421
84 313 132	M10x1x13,5 - SW5	421
84 313 232	M10x1x13,5 - SW5	421




# Micro-precision collet chuck

- ▲ bidirectional
- ▲ for speeds up to 60,000 1/min.

### Scope of supply:

Holder including clamping wrench SW 2 x 60 mm

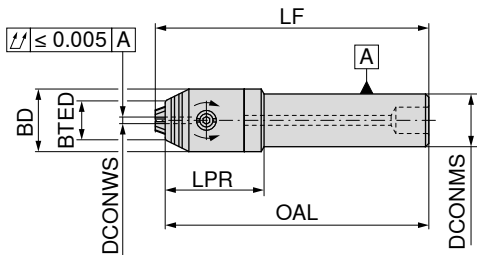


G 2,5 n<sub>max</sub> 18000

**84 315 ...**


DCONMS mm	DCONWS mm	LPR mm	OAL mm	LF mm	BD mm	BTED mm	TQX Nm
16	0,2 - 3,4	30	80	83	19	12	2
16	0,2 - 3,4	30	100	103	19	12	2
16	0,2 - 3,4	30	160	163	19	12	2
20	0,2 - 3,4	28	80	83	19	12	2
20	0,2 - 3,4	28	100	103	19	12	2
20	0,2 - 3,4	28	160	163	19	12	2

161  
162  
163  
  
201  
202  
203



Torx blade

**80 950 ...**



Torque screwdriver

**80 950 ...**

### Spare parts for Article no.


84 315 161	152	0,5 - 2,0 Nm	191
84 315 162	152	0,5 - 2,0 Nm	191
84 315 163	152	0,5 - 2,0 Nm	191
84 315 201	152	0,5 - 2,0 Nm	191
84 315 202	152	0,5 - 2,0 Nm	191
84 315 203	152	0,5 - 2,0 Nm	191

# Micro-extension

▲ for shanks with lateral clamping flat to DIN 6535 HB / 1835 B

## Scope of supply:

Holder with shank clamping screw

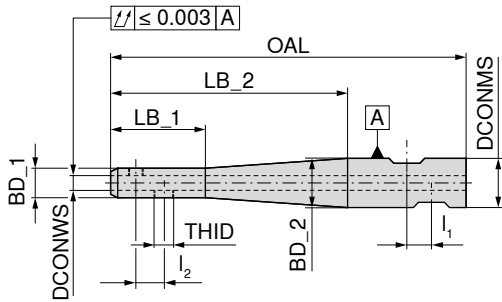

80 642 ...

DCONWS	BD_1	LB_1	LB_2	OAL	DCONMS	BD_2	l <sub>1</sub>	l <sub>2</sub>	THID	TQX	
mm	mm	mm	mm	mm	mm	mm	mm	mm		Nm	
6	12	40	40	85	12	12	10	10	M6 x 0,5	7	00600
6	12	40	100	150	20	20	10	10	M6 x 0,5	7	10600
8	15	40	40	88	16	15	10	10	M8 x 0,75	8	00800
8	15	40	100	150	20	20	10	10	M8 x 0,75	8	10800
10	18	40	40	90	20	18	10	10	M10 x 1	12	01000
10	18	40	100	150	20	20	10	10	M10 x 1	12	11000
12	21	40	40	90	20	21	10	10	M12 x 1	15	01200
12	21	40	100	150	20	21	10	10	M12 x 1	15	11200
14	23	40	40	90	20	23	10	10	M12 x 1	15	01400
14	23	40	100	150	20	23	10	10	M12 x 1	15	11400
16	26	40	50	106	25	26	10	12	M14 x 1	18	01600 <sup>1)</sup>
16	26	40	100	156	25	26	10	12	M14 x 1	18	11600 <sup>1)</sup>
18	28	40	50	106	25	28	10	12	M14 x 1	18	01800 <sup>1)</sup>
18	28	40	100	156	25	28	10	12	M14 x 1	18	11800 <sup>1)</sup>
20	31	40	50	110	32	31	10	14	M16 x 1	20	02000 <sup>1)</sup>
20	31	40	100	160	32	31	10	14	M16 x 1	20	12000 <sup>1)</sup>

1) only pre-balanced design



Clamping screw

80 950 ...

## Spare parts


DCONWS		
6	M6X0,5X3	21700
8	M8x0,75x4	21800
10	M10x1x5	21900
12 - 14	M12x1x5	30000
16 - 18	M14x1x6,5	31000
20	M16x1x6,5	32000

# Mini ER precision collet chuck – Centro-P

- ▲ Maximum clamping range covered according to ISO tolerance field H10
- ▲ Roll key required for clamping

### Scope of supply:

Holder **without nut, without backstop**

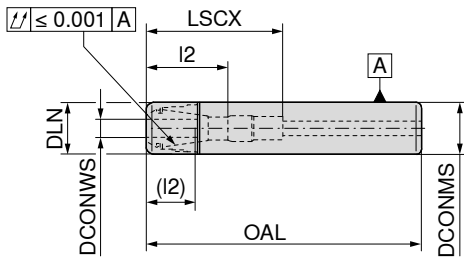

84 456 ...

DCONMS	DCONWS	DLN	OAL	LSCX	$l_2$ ( $l_2$ )	for collet	
mm	mm	mm	mm	mm	mm		
10	1 - 5	10	80	16		4004E (ER08)	00400
10	1 - 5	10	150	16		4004E (ER08)	005
10	1 - 5	10	200	16		4004E (ER08)	006
12	1 - 5	10	120	16		4004E (ER08)	11000
12	1 - 5	10	160	16		4004E (ER08)	11200
12	1 - 5	10	200	16		4004E (ER08)	11400
16	1 - 7	16	150	68	18 - 36 (12 - 26)	4008E (ER11)	007
16	1 - 7	16	200	68	18 - 36 (12 - 26)	4008E (ER11)	008
16	1 - 10	22	150	68	28 - 48 (16 - 35)	426E (ER16)	010
16	1 - 10	22	200	68	28 - 48 (16 - 35)	426E (ER16)	12000
20	1 - 10	22	150	68	28 - 48 (16 - 35)	426E (ER16)	102
20	1 - 10	22	200	68	28 - 48 (16 - 35)	426E (ER16)	104

**i** LSCX = Clamping depth without back stop screw for shanks  
 $l_2$  = with back stop screw 1, dimension in brackets ( $l_2$ ) = with back stop screw 2  
 dimension OAL when using tightening nuts with seals 4 mm longer

Spare parts for collet	Mini lock nut IK	Mini lock nut	Stop screw 2	Stop screw 1
4004E (ER08)	84 950 ...	84 950 ...	83 950 ...	83 950 ...
4008E (ER11)		040		
426E (ER16)	035	041	340	336
		034	M8x1 - SW4	M8x1 - SW4
			M11x1 - SW6	M11x1 - SW6
			341	337


### Accessories

ER collet	Device	Roll key	Roll key device
→ 268-276, 279	→ 285	→ 286	→ 286

**i** The transferable torques can be found on → **Page 313.**

## ER collet chuck with mini clamping nut

▲ with cylindrical shank

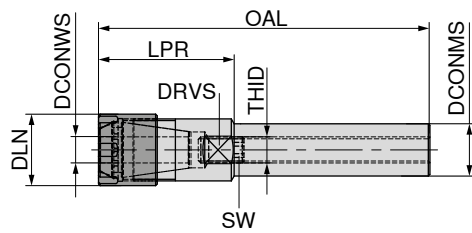


83 453 ...

DCONMS <sub>h6</sub> mm	DCONWS mm	OAL mm	LPR mm	DLN mm	THID	DRVS mm	SW mm	for collet	
8	1 - 5	81	26	12		9		4004E (ER08)	081 <sup>1)</sup>
12	1 - 5	157	20	12	M5x0,8	10	2,5	4004E (ER08)	122
16	1 - 7	185	25	16	M7,5x0,5	14	3,0	4008E (ER11)	163
16	1 - 10	117	37	22	M11x1	17	5,0	426E (ER16)	164
16	1 - 10	199	39	22	M8x1,25	17	4,0	426E (ER16)	165
20	1 - 10	168	28	22	M11x1	17	5,0	426E (ER16)	204
25	1 - 13	168	28	28	M14x1	22	5,0	428E (ER20)	254
25	1 - 16	189	39	35	M18x1	27	5,0	430E (ER25)	256

1) without coolant supply (form A)

## ER collet chuck with mini clamping nut



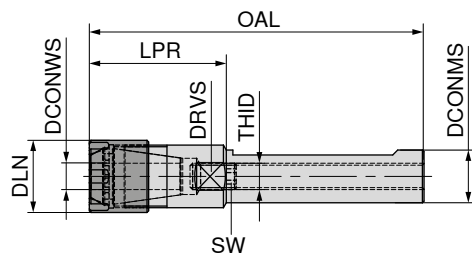

▲ with cylindrical shank and clamping flat



83 454 ...


DCONMS <sub>h6</sub> mm	DCONWS mm	OAL mm	LPR mm	DLN mm	THID	DRVS mm	SW mm	for collet	
20	1 - 10	168	28	22	M11x1	17	5	426E (ER16)	204
20	1 - 13	138	38	28	M11x1	22	5	428E (ER20)	206
20	1 - 16	146	46	35	M14x1	27	5	430E (ER25)	208
25	1 - 13	168	28	28	M14x1	22	5	428E (ER20)	254
25	1 - 16	189	39	35	M18x1	27	5	430E (ER25)	256

## Spare parts for ER collet chuck with mini lock nut




				
	83 950 ...	62 950 ...	83 950 ...	83 950 ...
<b>Spare parts for collet</b>				
4004E (ER08)	099	M10x0,75	067	
4004E (ER08)	099	M10x0,75	067	M5x0,8 SW 2,5
4008E (ER11)	100	M13x0,75	065	M7,5x0,5 SW 3
426E (ER16)	101	M19x1	066	M11x1 SW 5
426E (ER16)	101	M19x1	066	M8x1,25 SW 4
428E (ER20)	102	M24x1	068	M14x1 SW 5
430E (ER25)	103	M30x1	069	M18x1 SW 5

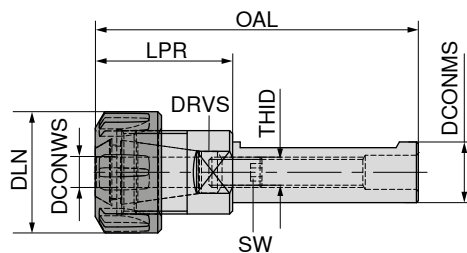

## ER Collet Chuck

▲ with cylindrical shank and clamping flat



DCONMS <sub>h6</sub>	DCONWS	OAL	LPR	DLN	THID	DRVS	SW	for collet	83 455 ...
mm	mm	mm	mm	mm	mm	mm	mm		
40	2 - 20	100	35	50	M22x1,5	36	5	470E (ER32)	401
40	2 - 20	160	35	50	M22x1,5	36	5	470E (ER32)	402
40	3 - 30	139	59	63	M28x1,5	40	6	472E (ER40)	405

			
	83 357 ...	83 950 ...	83 950 ...
<b>Spare parts for collet</b>			
470E (ER32)	132		
472E (ER40)	140	M28x1,5x25 SW 6	096
			M22x1,5x20 SW 5
			095

		
	83 950 ...	62 950 ...
<b>Spare parts for collet</b>		
470E (ER32)	M40x1,5	056
472E (ER40)	M50x1,5	057
		M40x1,5
		M50x1,5
		65600
		65700


### Accessories



ER collet

→ 268–276, 278–279


### Cylindrical milling bar for cutters with threaded end

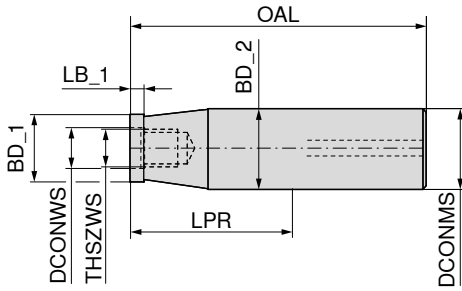

56 727 ...

DCONMS <sub>h6</sub> mm	THSZWS	DCONWS mm	LPR mm	BD_1 mm	LB_1 mm	BD_2 mm	OAL mm	
12	M5	5,5	20	9,5	7,8	11,5	65	052
12	M6	6,5	20	11,5	7,8	11,5	65	060
12	M6	6,5	40	11,5	7,8	11,5	85	062
16	M8	8,5	20	13,8	7,8	15,8	68	081
16	M8	8,5	40	13,8	7,8	15,8	88	082
20	M10	10,5	25	18,0	7,8	19,8	75	101
20	M10	10,5	45	18,0	7,8	19,8	95	102
25	M12	12,5	50	21,0	7,8	24,8	106	122
32	M16	17,0	50	29,0	12,0	31,8	110	162

### Milling bar for cutters with threaded end (Weldon)

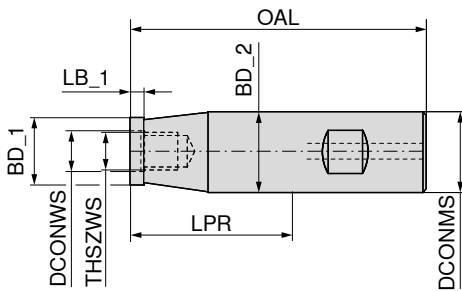


56 729 ...

DCONMS <sub>h6</sub> mm	THSZWS	DCONWS mm	LPR mm	BD_1 mm	LB_1 mm	BD_2 mm	OAL mm	
12	M6	6,5	20	11,5	7,8	11,5	65	060
12	M6	6,5	40	11,5	7,8	11,5	85	062
16	M8	8,5	20	13,8	12,0	15,8	68	081
16	M8	8,5	40	13,8	8,0	15,8	88	082
20	M10	10,5	25	18,0	8,0	19,8	75	101
20	M10	10,5	45	18,0	12,0	19,8	95	102
25	M12	12,5	30	21,0	12,0	24,9	86	121
25	M12	12,5	50	21,0	8,0	24,9	106	122
32	M16	17,0	50	29,0	12,0	31,8	110	162

# Screw-in adapter with cylindrical shank


▲ Vibration-damped

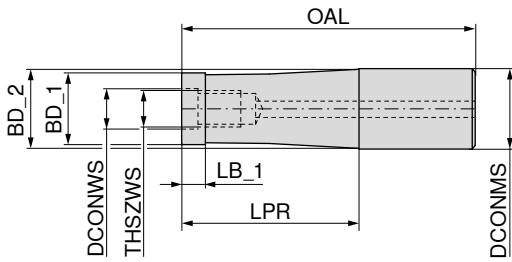

DCONMS <sub>h6</sub> mm	THSZWS	DCONWS mm	LPR mm	BD_1 mm	LB_1 mm	BD_2 mm	OAL mm	Solid carbide	Densimet
								56 743 ...	56 744 ...
12	M5	5,5	40	9,5	9	11,3	85		052
12	M5	5,5	60	9,5	9	11,3	105		053
12	M5	5,5	80	9,5	9	11,3	125		054
12	M6	6,5	20	11,5		11,5	65	060	
12	M6	6,5	40	11,5		11,5	85	062	
12	M6	6,5	60	11,5		11,5	105	063	
12	M6	6,5	80	11,5		11,5	125	064	
12	M6	6,5	100	11,5		11,5	145	065	
16	M8	8,5	40	14,2	9	15,3	88	082	082
16	M8	8,5	60	14,2	9	15,3	108	083	083
16	M8	8,5	80	14,2	9	15,3	128	084	084
16	M8	8,5	100	14,2	9	15,3	148	085	085
16	M8	8,5	120	14,2	9	15,3	168	086	086
16	M8	8,5	150	14,2	9	15,3	198		087
20	M10	10,5	60	18,5	9	19,3	110	103	103
20	M10	10,5	80	18,5	9	19,3	130	104	104
20	M10	10,5	100	18,5	9	19,3	150	105	105
20	M10	10,5	120	18,5	9	19,3	170	106	106
20	M10	10,5	140	18,5	9	19,3	190	107	107
25	M12	12,5	75	23,0	9	24,3	131		124
25	M12	12,5	80	23,0	9	24,3	136	124	
25	M12	12,5	100	23,0	9	24,3	156	125	125
25	M12	12,5	120	23,0	9	24,3	176	126	
25	M12	12,5	125	23,0	9	24,3	181		126
25	M12	12,5	140	23,0	9	24,3	196	127	
25	M12	12,5	150	23,0	9	24,3	206		127
25	M12	12,5	160	23,0	9	24,3	216	128	
25	M12	12,5	175	23,0	9	24,3	231		128
32	M16	17,0	100	29,0	9	31,5	160	165 <sup>1)</sup>	
32	M16	17,0	150	29,0	9	31,5	210	166 <sup>1)</sup>	
32	M16	17,0	200	29,0	9	31,5	260	167 <sup>1)</sup>	
32	M16	17,0	250	29,0	9	31,5	310	168 <sup>1)</sup>	
32	M16	17,0	300	29,0	9	31,5	360	169 <sup>1)</sup>	

1) On request

## Extensions for milling cutters with threaded end

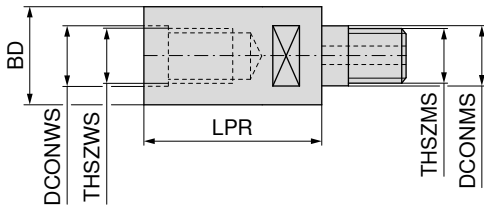


56 733 ...

THSZWS	THSZMS	DCONWS mm	DCONMS mm	LPR mm	BD mm
M8	M8	8,5	8,5	40	13,8
M8	M8	8,5	8,5	60	13,8
M10	M10	10,5	10,5	40	18,0
M10	M10	10,5	10,5	60	18,0
M12	M12	12,5	12,5	40	21,0
M12	M12	12,5	12,5	60	21,0
M16	M16	17,0	17,0	40	29,0
M16	M16	17,0	17,0	60	29,0

081  
082  
101  
102  
121  
122  
161  
162

## Reductions for milling cutters with threaded end

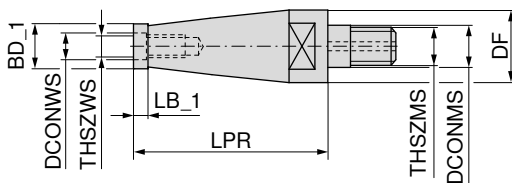

56 735 ...

THSZWS	THSZMS	DCONMS mm	DCONWS mm	LPR mm	BD_1 mm	DF mm	LB_1 mm
M6	M8	8,5	6,5	20	9,5	13,8	7,8
M8	M10	10,5	8,5	40	13,8	18,0	7,8
M8	M12	12,5	8,5	60	13,8	21,0	7,8
M10	M12	12,5	10,5	40	18,0	21,0	7,8
M10	M16	17,0	10,5	60	18,0	29,0	7,8
M12	M16	17,0	12,5	40	21,0	29,0	7,8

060  
081  
082  
101  
102  
121



# MultiChange – Programme Overview

The "MultiChange" interchangeable head system enables an extremely fast and problem free tool change. Provides quick changeover and concentricity with the highest stability at the same time. For a multitude of applications, the suitable interchangeable heads are available in the following chapters.

Exchangeable heads	
<p>→ <b>Chapter 2, Solid carbide drilling</b></p> <p>Solid Carbide NC Spot Drills</p> <p>Ø 8, 10, 12, 16, 20 mm NOF 2</p> <p>SIG 90°      SIG 120°      SIG 142°</p>	<p>Page No. 2 107</p>
<p>→ <b>Chapter 4, Reaming and countersinking</b></p> <p>Replaceable reaming heads</p> <p>Ø 8,00 – 30,20 mm</p> <p>Through hole</p> <p>Ø 12,20 – 30,20 mm</p> <p>Blind hole</p>	<p>Page No. 4 18 + 4 19</p>
<p>→ <b>Chapter 14, Solid carbide milling cutters</b></p> <p>Solid carbide shoulder mills</p> <p>Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4</p> <p>Type PCR-UNI      Type PCR-ALU      Type N</p> <p>Solid carbide torus bull nose milling cutters</p> <p>Ø 8, 10, 12, 16, 20 mm / ZEFP 3+4</p> <p>Type W      Type N</p> <p>Solid carbide rough and finish milling cutters</p> <p>Ø 8, 10, 12, 16, 20 mm / ZEFP 4+6</p> <p>Type NF</p> <p>Solid carbide finish milling cutters</p> <p>Ø 8, 10, 12, 16, 20 mm / ZEFP 6</p> <p>Type N</p> <p>Solid carbide ball-nosed end mills</p> <p>Ø 10, 12, 16, 20 mm / ZEFP 4</p> <p>Type N</p> <p>Solid carbide high-feed cutters</p> <p>Ø 8, 10, 12, 16, 20 mm / ZEFP 6</p> <p>Type N</p> <p>Solid carbide quarter round cutter</p> <p>Ø 8, 10, 12, 16, 20 mm / ZEFP 6</p> <p>Type N</p> <p>Solid carbide deburring cutters</p> <p>Ø 10, 12, 16, 20 mm / ZEFP 4+6</p> <p>Type N      Type N</p>	<p>Page No. 14 198 – 14 202</p>
<p>NOF / ZEFP = Number of cutting edges</p>	



Tool holder	
<p>→ <b>Catalogue – Clamping technology, Chapter 16 Accessories</b></p> <p>Page No. 16 259 – 16 261</p> <p><b>OAL 60 – 90 mm</b></p> <p>Tapered 87° / Steel      Cylindrical* / Steel</p> <p><b>OAL 85 – 120 mm</b></p> <p>Tapered 87° / Steel      Cylindrical* / Steel</p> <p>Tapered 87° / Solid carbide      Cylindrical* / Solid carbide</p> <p><b>OAL 110 – 150 mm</b></p> <p>Tapered 87° / Solid carbide      Cylindrical* / Solid carbide</p> <p><b>OAL 150 – 200 mm</b></p> <p>Tapered 87° / Solid carbide      Cylindrical* / Steel      Cylindrical* / Solid carbide</p> <p><b>OAL 200 – 250 mm</b></p> <p>Cylindrical* / Steel      Cylindrical* / Solid carbide</p>	
<p>* only conditionally suitable for milling</p>	

# MultiChange – Holders

- ▲ Tapered 87°
- ▲ SZID = Coupling Size

### Scope of supply:

Holder without mounting key

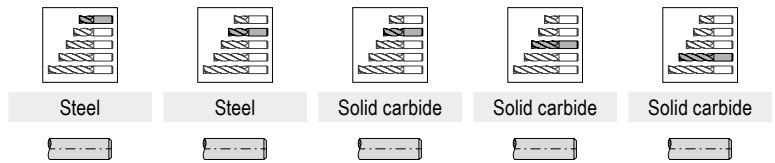

SZID	BD_1 mm	BD_2 mm	DCONMS mm	OAL mm	LB mm	LPR mm					
06	7,8	9,4	10	60	18	19					
06	7,8	9,4	10	85	43	44					
06	7,8	9,4	10	110	68	69					
06	7,8	9,4	10	150	108	109					
08	9,8	12,0	16	70	25	29					
08	9,8	13,0	16	90	38	41					
08	9,8	14,9	16	110	60	61					
08	9,8	15,4	16	150	100	101					
10	11,8	14,2	16	70	27	29					
10	11,8	15,2	16	90	40	41					
10	11,8	16,6	20	110	56	59					
10	11,8	19,5	20	150	98	99					
12	15,8	18,2	20	80	27	29					
12	15,8	19,5	20	105	53	54					
12	15,8	19,5	20	130	78	79					
12	15,8	19,5	20	150	98	99					
16	19,8	23,2	25	90	39	41					
16	19,8	24,5	25	120	60	61					
16	19,8	24,5	25	150	90	91					
16	19,8	24,5	25	200	140	141					

	84 001 ...	84 004 ...	84 005 ...	84 007 ...	84 010 ...
080		080	080		
100		100	100	080	080
120		120	120	100	100
160		160	160	120	120
200		200	200	160	160
				200	200

Assembly instructions can be found on → **Page 293**

### Accessories




insertion key	Adjustable wrench
→ 293	→ 293

# MultiChange – Holders

- ▲ cylindrical
- ▲ only conditionally suitable for milling
- ▲ SZID = Coupling Size

### Scope of supply:

Holder without mounting key



Steel

Steel

Steel

Steel



84 000 ...

84 002 ...

84 008 ...

84 011 ...

SZID	BD_1 mm	DCONMS mm	OAL mm	LB mm	LPR mm
06	7,8	10	60	17	19
06	7,8	10	85	42	44
06	7,8	10	150	107	109
08	9,8	12	70	22	24
08	9,8	12	90	42	44
08	9,8	12	150	102	104
10	11,8	16	70	17	21
10	11,8	16	90	37	41
10	11,8	16	150	97	101
12	15,8	16	80	30	31
12	15,8	16	105	55	56
12	15,8	16	150	100	101
12	15,8	16	200	150	151
16	19,8	25	90	26	31
16	19,8	25	120	56	61
16	19,8	25	200	136	141
16	19,8	25	250	186	191

080

080

080

100

100

100

120

120

120

160

160

160

200

200

200

160

200

Assembly instructions can be found on → **Page 293**

### Accessories



insertion key

Adjustable wrench

→ 293


→ 293

# MultiChange – Holders

- ▲ cylindrical
- ▲ only conditionally suitable for milling
- ▲ SZID = Coupling Size

### Scope of supply:

Holder without mounting key



Solid carbide



Solid carbide



Solid carbide



Solid carbide



84 003 ...

84 006 ...

84 009 ...

84 012 ...

SZID	BD_1 mm	DCONMS mm	OAL mm	LB mm	LPR mm
06	7,8	10	85	42	44
06	7,8	10	110	67	69
06	7,8	10	150	107	109
08	9,8	12	90	42	44
08	9,8	12	110	62	64
08	9,8	12	150	102	104
10	11,8	16	90	37	41
10	11,8	16	110	57	61
10	11,8	16	150	97	101
12	15,8	16	105	55	56
12	15,8	16	130	80	81
12	15,8	16	150	100	101
12	15,8	16	200	150	151
16	19,8	25	120	56	61
16	19,8	25	150	86	91
16	19,8	25	200	136	141
16	19,8	25	250	186	191

080

080

080

100

100

100

120

120

120

160

160

160

200

200

200

160

200

Assembly instructions can be found on → **Page 293**

### Accessories



insertion key

→ 293



Adjustable wrench


→ 293

## Extension for Shell mill arbors

▲ Variable applications through usage of one or two extensions (max. 2 x 50 mm possible)

### Scope of supply:

Holder without clamping screw

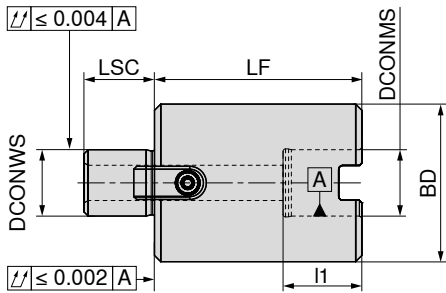


						82 648 ...
DCONWS <sub>H5</sub>	DCONMS <sub>H5</sub>	LF	BD	LSC	l <sub>1</sub>	
mm	mm	mm	mm	mm	mm	
16	16	50	38	17	19	050
16	16	75	38	17	19	075
22	22	50	48	19	21	150
22	22	75	48	19	21	175
27	27	50	58	21	23	250
27	27	75	58	21	23	275
32	32	50	78	24	26	350
32	32	75	78	24	26	375
40	40	50	88	27	29	450
40	40	75	88	27	29	475

Spare parts for Article no.	Screw for drivers		Driver		Cross screw		Cross screw	
	83 950 ...	83 950 ...	82 649 ...	82 649 ...	82 649 ...	82 649 ...	82 649 ...	
82 648 050	M3x8	296	8x9x17,5	120	M8x125	001	M8x80	050
82 648 075	M3x8	296	8x9x17,5	120			M8x100	075
82 648 150	M4x12	297	10x11x20,5	121	M10x125	100	M10x80	150
82 648 175	M4x12	297	10x11x20,5	121			M10x100	175
82 648 250	M5x12	136	12x13x24,3	122	M12x125	200	M12x80	250
82 648 275	M5x12	136	12x13x24,3	122			M12x100	275
82 648 350	M5x20	137	14x21x21,2	123	M16x125	300	M16x80	350
82 648 375	M5x20	137	14x21x21,2	123			M16x100	375
82 648 450	M6x16	138	15,9x16,3x19,5	295				
82 648 475	M6x16	138	15,9x16,3x19,5	295				

When using two extension pieces (max. 2 x 50 mm) please use a tightening bolt with a length of 125 mm.

# Milling Adapter Rings DIN 2084 Form B




83 385 ...

DCONMS mm	BD mm	OAL mm	
13	22	2	013
	22	3	113
	22	4	213
	22	5	313
	22	6	413
	22	10	513
16	26	2	016
	26	3	116
	26	4	216
	26	5	316
	26	6	416
	26	10	516
	26	20	616
22	34	2	022
	34	3	122
	34	4	222
	34	5	322
	34	6	422
	34	10	522
	34	20	622
	34	30	722
27	41	2	027
	41	3	127
	41	4	227
	41	5	327
	41	6	427
	41	10	527
	41	20	627
32	47	2	032
	47	3	132
	47	4	232
	47	5	332
	47	6	432
	47	10	532
	47	20	632
	47	30	732
40	55	2	040
	55	3	140
	55	4	240
	55	5	340
	55	6	440
	55	10	540
	55	20	640
	55	30	740

## Spare parts for VDI holders with DirectCooling

### Clamping rail

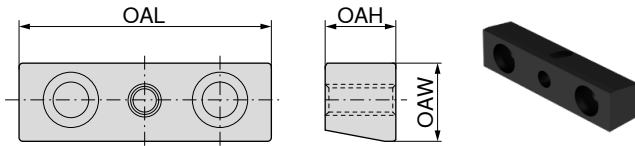


OAL mm	OAW mm	OAH mm	82 250 ...
53,0	12,7	11,5	05300
54,0	16,0	15,0	05400
67,5	16,0	15,0	06750
68,0	21,0	19,0	06800
83,0	20,5	19,0	08300
90,0	20,5	19,0	09000

### Screw for ball-shaped spray nozzle



THOD	82 950 ...
M3x10	31000
M4x10	31300
M5x12	31100
M6x12	31200

### Clamping wedge

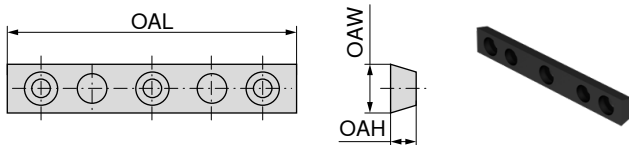


OAL mm	OAW mm	OAH mm	82 250 ...
70	14	7,3	07000
85	14	7,3	08500
100	14	7,3	10000

### Ball-shaped spray nozzle



THID	BD mm	82 950 ...
M5	8	30600
M6	10	30900
M6	12	30700
M6	14	30800

### Levelling plates

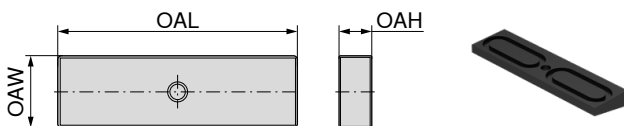

OAL mm	OAW mm	OAH mm	82 250 ...
53,0	14	6,1	15300
67,5	18	6,3	16750
83,0	22	7,5	18300
90,0	22	7,5	19000


## Spare parts for VDI holders with DirectCooling

O ring  
for clamping wedge



Size	82 950 ...
Ø13 x Ø2	32600
Ø18 x Ø2	32700
Ø22 x Ø2	32800

Screw plug for ball-shaped  
spray nozzle



THOD	OAL mm	82 950 ...
M5	6	32900
M6	6	33000

O ring for ball-shaped  
spray nozzle



Size	82 950 ...
Ø10 x Ø2	31600
Ø5 x Ø1,5	31400
Ø7 x Ø1,5	31700
Ø7 x Ø2,5	31500

Screw for clamping wedge



THOD	82 950 ...
M5x12	31800
M6x16	32200
M6x20	31900
M8x20	32300
M8x25	32100


Quad ring



Size	82 950 ...
Ø21,95 x Ø1,78	32400
Ø28,3 x Ø1,78	32500




## Screw for cylindrical adapters E2



## Levelling plates

- ▲ For axial and radial tool holders
- ▲ Without mounting thread



83 950 ...

THOD	OAL mm	DRVS mm	
M6	12	3	461
M6	16	3	462
M6	25	3	463
M8	10	4	464
M8	12	4	465
M8	16	4	466
M8	20	4	467
M8	25	4	468
M8	30	4	469
M10	16	5	470
M10	20	5	471
M10	25	5	472
M10	30	5	473
M12	12	6	474
M12	16	6	475
M12	20	6	476
M12	25	6	477

83 950 ...

OAH mm	OAL mm	OAW mm	
4	38	14	210
4	48	14	211
4	54	14	212
4	55	12	213
4	69	16	214
4	72	14	215
4	75	12	216
4	99	16	217
5	84	20	218
5	117	20	219
7	99	25	220
7	120	25	221
7	129	25	222
7	143	25	223

## Clamping screw for cylindrical adapters E1



83 950 ...

THOD	
M10x1x10	180
M12x1x12	181
M16x1x13	182

### Lock nut with external thread form ER for sealing rings with internal cooling



83 950 ...

for collet	THOD	DRVS mm	
ER 16	M24x1	19	45600
ER 20	M28x1,5	22	45700
ER 25	M32x1,5	24	45800
ER 32	M40x1,5	32	45900

### Ball-shaped spray nozzle



83 950 ...

Ø 8 - M 5	200
Ø 10 - M 6	201
Ø 14 - M 8	202

### Pipe joints

▲ steel pipe



83 950 ...

THOD	CXD mm	Type	
M8x1	5	A	372
M10x1	6	A	373
M10x1	8	A	374
M8x1	5	B	375
M10x1	6	B	376
M10x1	8	B	377


### O-Ring



83 950 ...

Adapter	Size	
VDI 16	15 x 1,5	205
VDI 20	18,77 x 1,78	206
VDI 30	28,3 x 1,78	207
VDI 40	37,77 x 2,62	208
VDI 50	47,29 x 2,62	209

### Spray nozzle element

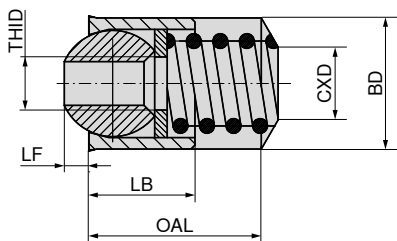


83 950 ...

BD mm	THID	OAL mm	LB mm	LF mm	CXD mm	
9,88	M4	13	8	2,2	5,5	247
11,88	M6	15	10	3,0	6,8	248
13,88	M6	17	12	4,0	6,8	249

# Precision ER collet for precision collet chuck – Centro-P


- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ 12 times slotted
- ▲ Double taper collet
- ▲ Coloured ring as identification of precision collet
- ▲ ER08: 5 µm runout and repeatability
- ▲ Coated precision collet

**ER-B**  
**2 µm**



DCONWS mm	BD = 8,5 OAL = 13,6 4004 E / ER08	BD = 11,5 OAL = 18 4008 E / ER11	BD = 17 OAL = 27,5 426 E / ER16	BD = 26 OAL = 34 430 E / ER25	BD = 33 OAL = 40 470 E / ER32	BD = 41 OAL = 46 472 E / ER40
	84 577 ...	84 585 ...	84 596 ...	84 597 ...	84 598 ...	84 599 ...
1,0	010	010	010			
1,1			011			
1,2			012			
1,4			014			
1,5	015	015	015			
1,6			016			
1,8			018			
2,0	020	020	020	020	020	
2,2			022			
2,4			024			
2,5	025	025	025	025		
2,6			026			
2,8			028			
3,0	030	030	030 <sup>1)</sup>	030	030	030
3,2			032			
3,4			034			
3,5	035	035	035	035		
3,6			036			
3,8			038			
4,0	040	040	040 <sup>1)</sup>	040	040 <sup>1)</sup>	040
4,5	045	045	045	045		
5,0	050	050	050 <sup>1)</sup>	050	050	050
5,5		055	055	055		
5,6			056			
6,0		060	060 <sup>1)</sup>	060 <sup>1)</sup>	060 <sup>1)</sup>	060
6,3			063			
6,5		065	065	065		
7,0		070	070	070	070	070
7,1			071			
7,5			075	075		
8,0			080 <sup>1)</sup>	080 <sup>1)</sup>	080 <sup>1)</sup>	080
8,5			085	085		
9,0			090	090	090	090
9,5			095	095		
10,0			100 <sup>1)</sup>	100 <sup>1)</sup>	100 <sup>1)</sup>	100
10,5				105		
11,0				110	110	110
11,5				115		
12,0				120 <sup>1)</sup>	120 <sup>1)</sup>	120
12,5				125		
13,0				130	130	130
13,5				135		
14,0				140 <sup>1)</sup>	140 <sup>1)</sup>	140
14,5				145		
15,0				150	150	150
15,5				155		
16,0				160 <sup>1)</sup>	160 <sup>1)</sup>	160
17,0					170	170
18,0					180	180
19,0					190	190
20,0					200 <sup>1)</sup>	200
21,0						210
22,0						220
23,0						230
24,0						240
25,0						250
26,0						260
Set in wooden box			999	999	999	

1) Included in the set




Clamping range covered: H10 corresponding to shank Ø DCONWS

# ER precision collet, sealed, for precision collet chuck – Centro-P

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ Coloured ring as identification of precision collet
- ▲  $p_{max.} = 60$  bar
- ▲ Coated precision collet

**ER-B**  
**2 µm**




DCONWS mm	BD = 11,3 OAL = 18 425 E / ER11		BD = 16,7 OAL = 27,5 425 E / ER16		BD = 25,7 OAL = 34 429 E / ER25		BD = 32,7 OAL = 40 469 E / ER32		BD = 40,7 OAL = 46 471 E / ER40	
	84 536 ...		84 537 ...		84 538 ...		84 539 ...		84 540 ...	
3	030		030		030		030			
4	040		040		040		040			
5	050		050		050		050			
6	060		060		060		060			060
7			070		070		070			
8			080		080		080			080
9			090		090		090			
10			100		100		100			100
11					110		110			
12					120		120			120
13					130		130			
14					140		140			140
15					150		150			
16					160		160			160
17							170			
18							180			180
19							190			
20							200			200
22										220
25										250

# ER precision collet, sealed with coolant channels, for precision collet chuck – Centro-P

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ Coloured ring as identification of precision collet
- ▲ Coated precision collet

**ER-A**  
**2 μm**




DCONWS mm	BD = 11,3 OAL = 18 4012 E / ER11	BD = 16,7 OAL = 27,5 425 E / ER16	BD = 25,7 OAL = 34 429 E / ER25	BD = 32,7 OAL = 40 469 E / ER32	BD = 40,7 OAL = 46 471 E / ER40
	<b>84 547 ...</b>	<b>84 548 ...</b>	<b>84 549 ...</b>	<b>84 550 ...</b>	<b>84 551 ...</b>
3	03000	03000			
4	04000	040	040	040	
6	06000	060	060	060	06000
8		080	080	080	08000
10		10000	100	100	100
12			120	120	120
14			140	140	
16			16000	160	160
18				180	
20				200	200
25					250

# ER precision collet

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ 12 times slotted
- ▲ Double taper collet
- ▲ Coated collet

**ER-B**  
5 µm



	BD = 11,5 OAL = 18 4008 E / ER11	BD = 17 OAL = 27,5 426 E / ER16	BD = 21 OAL = 31,5 428 E / ER20	BD = 26 OAL = 34 430 E / ER25	BD = 33 OAL = 40 470 E / ER32	BD = 41 OAL = 46 472 E / ER40
	84 576 ...	84 578 ...	84 579 ...	84 580 ...	84 581 ...	84 582 ...
DCONWS mm						
1,0	010	010	010 <sup>1)</sup>	010 <sup>1)</sup>		
1,5	015	015 <sup>1)</sup>	015 <sup>1)</sup>	015 <sup>1)</sup>		
2,0	020	020	020	020	020 <sup>1)</sup>	
2,5	025	025 <sup>1)</sup>	025 <sup>1)</sup>	025 <sup>1)</sup>	025 <sup>1)</sup>	
3,0	030	030	030	030	030	030 <sup>1)</sup>
3,5	035					
4,0	040	040	040	040	040	040
4,5	045					
5,0	050	050	050	050	050	050
5,5	055					
6,0	060	060	060	060	060	060
6,5	065					
7,0	070	070	070	070	070	070
8,0		080	080	080	080	080
9,0		090	090	090	090	090
10,0		100	100	100	100	100
11,0			110	110	110	110
12,0			120	120	120	120
13,0			130	130	130	130
14,0				140	140	140
15,0				150	150	150
16,0				160	160	160
17,0					170	170
18,0					180	180
19,0					190	190
20,0					200	200
21,0						210
22,0						220
23,0						230
24,0						240
25,0						250
26,0						260
Set in wooden box	999	999	999	999	999	999



1) not included in the set

Clamping range covered: up to Ø 2 mm = 0.5 mm, from Ø 2.5 mm = 1 mm

# ER collet

- ▲ DIN ISO 15488-B (alt DIN 6499-B)
- ▲ 16 times slotted
- ▲ Double taper clamping

**ER-B**  
**10 µm**




DCONWS mm	NEW	NEW	NEW	NEW
	BD = 8,5 OAL = 13,6 4004 E / ER08	BD = 17 OAL = 27,5 426 E / ER16	BD = 26 OAL = 34 430 E / ER25	BD = 33 OAL = 40 470 E / ER32
	82 683 ...	82 684 ...	82 685 ...	82 686 ...
1,0	01000	01000		
1,5	01500			
2,0	02000	02000	02000	
2,5	02500			
3,0	03000	03000	03000	03000
3,5	03500			
4,0	04000	04000	04000	04000
4,5	04500			
5,0	05000	05000	05000	05000
6,0		06000	06000	06000
7,0		07000	07000	07000
8,0		08000	08000	08000
9,0		09000	09000	09000
10,0		10000	10000	10000
11,0			11000	11000
12,0			12000	12000
13,0			13000	13000
14,0			14000	14000
15,0			15000	15000
16,0			16000	16000
17,0				17000
18,0				18000
19,0				19000
20,0				20000
Set in plastic case	99900	99900	99900	99900

Clamping range covered: up to Ø 3 mm = 0.5 mm, from Ø 4 mm = 1 mm

# ER precision tap collet

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ For Centro-P and standard chucks
- ▲  $p_{max.} = 60$  bar
- ▲ Coated collet

**ER-A**  
**10  $\mu$ m**



BD = 16,7 OAL = 27,5 4031 E / ER16	BD = 25,7 OAL = 34 4282 E / ER25	BD = 32,7 OAL = 40 4537 E / ER32
--	--	--


DCONWS mm	84 531 ...	84 533 ...	84 534 ...
	2,8	028	
3,5	035	035	
4,0	040	040	040
4,5	045	045	045
6,0	060	060	060
7,0	070	070	070
8,0	080	080	080
9,0	090	090	090
10,0		100	100
11,0		110	110
12,0		120	120
14,0		140	140
16,0		160	160
18,0			180
20,0			200



# ER precision collet, sealed with coolant channels

- ▲ Similar to DIN ISO 15488-A
- ▲ 8 times slotted
- ▲ For Centro-P and standard chucks
- ▲ Coated collet

**ER-A**  
**10 µm**





	BD = 16,7 OAL = 27,5 4537 E / ER16	BD = 25,7 OAL = 34 4537 E / ER25	BD = 32,7 OAL = 40 4537 E / ER32
	<b>84 567 ...</b>	<b>84 568 ...</b>	<b>84 569 ...</b>
<b>DCONWS</b>			
mm			
3,5	035		
4,5	045	045	045
6,0	060	060	060
7,0	070	070	070
8,0	080	080	080
9,0	09000	090	090
10,0		100	100
11,0		110	110
12,0		120	120
14,0		140	140
16,0		16000	160
18,0			180
20,0			200

DCONWS
mm
3,5
4,5
6,0
7,0
8,0
9,0
10,0
11,0
12,0
14,0
16,0
18,0
20,0

# ER precision collet

- ▲ DIN ISO 15488-B (old DIN 6499-B)
- ▲ Double taper collet
- ▲ 16 times slotted

**ER-B**  
**20 µm**





DCONWS mm	NEW		NEW		NEW		NEW		NEW	
	BD = 17 OAL = 27,5 426 E / ER16	BD = 21 OAL = 31,5 428 E / ER20	BD = 26 OAL = 34 430 E / ER25	BD = 33 OAL = 40 470 E / ER32	BD = 41 OAL = 46 472 E / ER40					
	82 687 ...	82 688 ...	82 689 ...	82 690 ...	82 691 ...					
1	01000	01000								
2	02000	02000	02000							
3	03000	03000	03000	03000	03000					
4	04000	04000	04000	04000	04000					
5	05000	05000	05000	05000	05000					
6	06000	06000	06000	06000	06000					
7	07000	07000	07000	07000	07000					
8	08000	08000	08000	08000	08000					
9	09000	09000	09000	09000	09000					
10	10000	10000	10000	10000	10000					
11		11000	11000	11000	11000					
12		12000	12000	12000	12000					
13		13000	13000	13000	13000					
14			14000	14000	14000					
15			15000	15000	15000					
16			16000	16000	16000					
17				17000	17000					
18				18000	18000					
19				19000	19000					
20				20000	20000					
21					21000					
22					22000					
23					23000					
24					24000					
25					25000					
26					26000					
Set in plastic case	99900	99900	99900	99900	99900					

Clamping range covered: up to Ø 2 mm = 0.5 mm, from Ø 2.5 mm = 1 mm

# ER collet with internal square

- ▲ Similar DIN ISO 15488-A (old DIN 6499-A)
- ▲ 8 times slotted
- ▲ Double taper collets for holding taps on synchronised spindle machines, without compensating lengths

**ER-A**  
**15 µm**



DCONWS mm	NEW			
	BD = 16,7 OAL = 27,5 426 E / ER16	BD = 25,7 OAL = 34 430 E / ER25	BD = 32,7 OAL = 40 470 E / ER32	BD = 40,7 OAL = 46 472 E / ER40
	82 695 ...	82 692 ...	82 693 ...	82 694 ...
2,8	02800			
3,5	03500			
4,0	04000			
4,5	04500	04500	04500	
5,0	05000			
5,5	05500	05500	05500	
6,0	06000	06000	06000	
7,0	07000	07000	07000	07000
8,0	08000	08000	08000	08000
9,0	09000	09000	09000	09000
10,0		10000	10000	10000
11,0		11000	11000	11000
12,0		12000	12000	12000
14,0			14000	14000
16,0			16000	16000
18,0				18000
20,0				20000

## Wooden boxes for collets

▲ For collets form A+B

**Scope of supply:**  
empty wooden box




83 689 ...

for collet	capacity	
4004E (ER08)	9	008
426E (ER16)	10	116
428E (ER20)	11	020
4008E (ER11)	13	011
430E (ER25)	14	025
470E (ER32)	18	032
472E (ER40)	24	040

# ER wedge collet with pull out protection, for precision collet chucks – Centro-P – HDC

- ▲ Similar to DIN ISO 15488-A
- ▲ Slotted
- ▲ Double taper collet


**ER**  
**5 μm**



BD = 32,7  
OAL = 40  
ER 32

**83 629 ...**

DCONWS mm	
12	120
16	160




**83 950 ...**

Spare parts DCONWS		
12	CP 32	455
16	CP 32	455

# Tapping Collet Form ET (ER) with length compensation

- ▲ DIN ISO 15488 (old DIN 6499)
- ▲ With pull out length compensation (LTENS)
- ▲ The spring force is adapted to the thread size
- ▲ Anti-rotation by 2 and/or 4 clamping screws on the shank square drive

**ER**  
**10 µm**





DCONWS mm	BD = 17 LTENS = 7 426 E / ER16	BD = 21 LTENS = 7 428 E / ER20	BD = 26 LTENS = 8 430 E / ER25	BD = 33 LTENS = 10 470 E / ER32	BD = 41 LTENS = 13 472 E / ER40
	80 661 ...	80 662 ...	80 663 ...	80 664 ...	80 665 ...
2,2	022	022			
2,5	025	025	025		
2,8	028	028	028		
3,0	030	030	030		
3,5	035	035	035		
4,0	040	040	040		
4,5	045	045	045		
5,0				045	
5,5	055	055	055	050	
6,0	060	060	060	055	060
7,0		070	070	060	070
8,0			080	070	080
9,0			090	080	090
10,0			100	090	100
11,0				100	110
12,0				110	120
14,0				120	140
16,0					160



When using CNC machines apply canned cycles with a feed rate or pitch of only 95 % with small threads and up to 99 % with large threads. In this way when reversing the rotation of the spindle an optimum length compensation in both directions is guaranteed.

# Sealing discs for precision collet chucks – Centro-P, ER-Standard and ER-Mini with thro' coolant


- ▲ For sealing when using tools with internal cooling
- ▲ Sealing range: nominal diameter -0,1 mm / +0,4 mm
- ▲ Can be applied up to 80 bar



DCONWS mm	BD = 12,6 OAL = 2 426E (ER16)	BD = 15,8 OAL = 2 428E (ER20)	BD = 20,2 OAL = 2 430E (ER25)	BD = 26,2 OAL = 2 444E / OZ (ER32)	BD = 34,2 OAL = 2 472E (ER40)
	83 690 ...	83 694 ...	83 691 ...	83 692 ...	83 693 ...
1,0	010				
1,5	015				
2,0	020				
2,5	025				
3,0	030	020	020	020	030
3,5	035	030	030	030	035
4,0	040	035	035	035	040
4,5	045	040	040	040	045
5,0	050	045	045	045	050
5,5	055	050	050	050	055
6,0	060	055	055	055	060
6,5	065	060	060	060	065
7,0	070	065	065	065	070
7,5	075	070	070	070	075
8,0	080	075	075	075	080
8,5	085	080	080	080	085
9,0	090	085	085	085	090
9,5	095	090	090	090	095
10,0	100	095	095	095	100
10,5		100	100	100	105
11,0		105	105	105	110
11,5		110	110	110	115
12,0		115	115	115	120
12,5		120	120	120	125
13,0		125	125	125	130
13,5		130	130	130	135
14,0			135	135	140
14,5			140	140	145
15,0			145	145	150
15,5			150	150	155
16,0			155	155	160
16,5			160	160	165
17,0				165	170
17,5				170	175
18,0				175	180
18,5				180	185
19,0				185	190
19,5				190	195
20,0				195	200
20,5				200	205
21,0					210
21,5					215
22,0					220
22,5					225
23,0					230
23,5					235
24,0					240
24,5					245
25,0					250
25,5					255
26,0					260

## Sealing rings for precision collet chucks – PCC

- ▲ For sealing when using tools with internal cooling
- ▲ Sealing range: nominal diameter  $-0,1$  mm /  $+0,4$  mm
- ▲ Can be applied up to 100 bar




DCONWS mm	BD = 13 OAL = 4 426E (ER16)	BD = 21 OAL = 4 430E (ER25)	BD = 27 OAL = 4 470E (ER32)
	82 630 ...	82 631 ...	82 632 ...
3,0	03000	03000	03000
3,5	03500	03500	03500
4,0	04000	04000	04000
4,5	04500	04500	04500
5,0	05000	05000	05000
5,5	05500	05500	05500
6,0	06000	06000	06000
6,5	06500	06500	06500
7,0	07000	07000	07000
7,5	07500	07500	07500
8,0	08000	08000	08000
8,5	08500	08500	08500
9,0	09000	09000	09000
9,5	09500	09500	09500
10,0	10000		
10,5		10500	10500
11,0		11000	11000
11,5		11500	11500
12,0		12000	12000
12,5		12500	12500
13,0		13000	13000
13,5		13500	13500
14,0		14000	14000
14,5		14500	14500
15,0		15000	15000
15,5		15500	15500
16,0		16000	16000
16,5			16500
17,0			17000
17,5			17500
18,0			18000
18,5			18500
19,0			19000
19,5			19500
20,0			20000




## Reducing sleeves for hydraulic and high pressure chucks

▲ Thro' coolant to 80 bar



## Reduction sleeves with coolant hole for hydraulic and high pressure chucks

▲ with coolant holes, for flexible diameter application




### 83 609 ...

DCONMS	DCONWS	OAL	LCOL	LSC	
mm	mm	mm	mm	mm	
12	3	40	36	29	103
12	4	40	36	29	104
12	5	40	36	29	105
12	6	40	36	36	106
12	8	40	36	37	108
20	3	54	50	28	203
20	4	54	50	28	204
20	5	54	50	28	205
20	6	54	50	36	206
20	8	54	50	37	208
20	10	54	50	40	210
20	12	54	50	45	212
20	14	54	50	45	214
20	16	54	50	48	216
25	6	60	56	37	256
25	8	60	56	37	258
25	10	60	56	40	260
25	12	60	56	46	262
25	14	60	56	47	264
25	16	60	56	48	266
25	18	60	56	48	268
25	20	60	56	50	270
32	6	64	60	36	306
32	8	64	60	36	308
32	10	64	60	40	310
32	12	64	60	45	312
32	14	64	60	46	314
32	16	64	60	48	316
32	18	64	60	49	318
32	20	64	60	50	320
32	25	64	60	56	325

### 83 611 ...

DCONMS	DCONWS	BD	OAL	LCOL	LSC	
mm	mm	mm	mm	mm	mm	
12	3	16	44	40	29	10300
12	4	16	44	40	29	10400
12	5	16	44	40	29	10500
12	6	16	44	40	36	10600
12	8	16	44	40	37	10800
20	3	25	54	50	28	20300
20	4	25	54	50	28	20400
20	5	25	54	50	28	20500
20	6	25	54	50	36	20600
20	8	25	54	50	37	20800
20	10	25	54	50	40	21000
20	12	25	54	50	45	21200
20	14	25	54	50	45	21400
20	16	25	54	50	48	21600
32	6	36	64	60	36	30600
32	8	36	64	60	36	30800
32	10	36	64	60	40	31000
32	12	36	64	60	45	31200
32	14	36	64	60	46	31400
32	16	36	64	60	48	31600
32	18	36	64	60	49	31800
32	20	36	64	60	50	32000
32	25	36	64	60	56	32500

## Stop screw for use with reducing sleeves in hydraulic chuck



### 83 950 ...


THOD	BD	DRVS	
	mm	mm	
M4x0,5x26	2,8	2	425
M8x1x19	5,8	2,5	428
M10x1x16	5,8	3	426
M16x1x16	11,7	5	427

## Adaptation for the use of stop screws for reducing sleeves

DCONMS in mm			
12		83 950 425	83 950 426
20	83 950 425	83 950 428	83 950 427
25	83 950 425	83 950 428	83 950 427
32		83 950 428	83 950 427


## Slotted reduction sleeves

- ▲ For cylindrical and other tool holders
- ▲ For tools with cylindrical shank

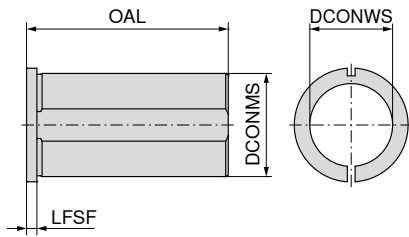

## Reduction sleeves for direct clamping

- ▲ For tools with cylindrical shank

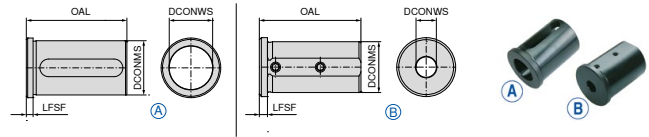

### 83 271 ...

DCONMS mm	DCONWS mm	OAL mm	LFSF mm	
20	6	30	4	206
20	8	30	4	208
20	10	30	4	210
20	12	30	4	212
20	15	30	4	215
20	16	30	4	216
25	6	40	4	256
25	8	40	4	258
25	10	40	4	260
25	12	40	4	262
25	15	40	4	265
25	16	40	4	266
25	20	40	4	270
32	6	50	4	326
32	8	50	4	328
32	10	50	4	330
32	12	50	4	332
32	15	50	4	335
32	16	50	4	336
32	20	50	4	340
40	10	78	4	410
40	12	78	4	412
40	15	78	4	415
40	16	78	4	416
40	20	78	4	420
40	25	78	4	425
40	32	78	4	432
50	20	88	4	520
50	25	88	4	525
50	32	88	4	532
50	40	88	4	540

### 83 272 ...

DCONMS mm	DCONWS mm	OAL mm	LFSF mm	Fig.	
25	6	50	4	B	256
25	8	50	4	B	258
25	10	50	4	B	260
25	12	50	4	B	262
25	14	50	4	A	264
25	16	50	4	A	266
25	20	50	4	A	270
32	6	58	5	B	326
32	8	58	5	B	328
32	10	58	5	B	330
32	12	58	5	B	332
32	16	58	5	A	336
32	20	58	5	A	340
32	25	58	5	A	345
40	8	58	5	B	408
40	10	58	5	B	410
40	12	58	5	B	412
40	16	58	5	A	416
40	20	58	5	A	420
40	25	58	5	A	425
40	32	58	5	A	432
50	12	75	5	B	512
50	16	75	5	A	516
50	20	75	5	A	520
50	25	75	5	A	525
50	32	75	5	A	532
50	40	75	5	A	540

## Taper wiper

▲ Version made from hard wood with felt inserts



83 715 ...

Adapter	
MK 1	001
MK 2	002
MK 3	003
MK 4	004
MK 5	005
HSK 32	320
HSK 40	400
HSK 50	500
HSK 63	630
HSK 80	800
HSK 100	100
SK 30	130
SK 40	140
SK 50	150

## Assembly device for ISO adaptors

▲ Aluminium



80 720 ...


Adapter	
SK 30	030
SK 40	040
SK 50	050

## Assembly fixture for tool holders

▲ gripping by roller


▲ secure clamping

▲ quick assembly, no additional clamping necessary




80 722 ...

Holder Type	DCONWS mm	
HSK 32, PSC 32	32,0	032
HSK 40, PSC 40	40,0	040
MAS-BT 30	46,0	046
ISO 7388-1 / DIN 2080 - SK 30, HSK 50, PSC 50	50,0	050
ISO 7388-1 / DIN 2080 - SK 40, HSK 63, PSC 63, MAS-BT 40, ANSI-CAT 40	63,0	063
ISO 7388-1 - SK 50	97,5	097
HSK 100, MAS-BT 50, ANSI-CAT 50	100,0	100

 Safety Note: The clamping devices must be free of oil and grease to avoid slipping!

### ER Standard lock nut for precision collet chuck – Centro-P



for seals

for collet	DCONWS mm	DLN mm	TQX Nm	84 950 ...	84 950 ...
426E (ER16)	1 - 10	30	80	001	011
430E (ER25)	2 - 16	40	90	003	013
470E (ER32)	2 - 20	50	180	005	015
472E (ER40)	3 - 26	63	200	007	017


### Collet removal aid for Mini lock nut for precision collet chuck – Centro-P



84 950 ...

for collet	84 950 ...
4004E (ER08)	070
4008E (ER11)	072

### Tapered lock nut for precision collet chuck – Centro-P



for seals

for collet	DCONWS mm	DLN mm	TQX Nm	84 950 ...	84 950 ...
426E (ER16)	1 - 10	24	80	031	033

### Mini lock nut for precision collet chuck – Centro-P



for seals

for collet	DCONWS mm	DLN mm	TQX Nm	84 950 ...	84 950 ...
4004E (ER08)	1 - 5	10	5 - 8	040	
4008E (ER11)	1 - 7	16	10	041	
4008E (ER11)	∅ 3,0	16	10	042 <sup>1)</sup>	
4008E (ER11)	∅ 4,0	16	10	043 <sup>1)</sup>	
4008E (ER11)	∅ 5,0	16	10	044 <sup>1)</sup>	
4008E (ER11)	∅ 6,0	16	10	045 <sup>1)</sup>	
4008E (ER11)	∅ 7,0	16	10	046 <sup>1)</sup>	
426E (ER16)	1 - 10	22	30	034	
426E (ER16)	1 - 10	22	28		035

1) directly sealed

## Roll key

- ▲ Version CP = for Centro-P lock nuts
- ▲ Version STD = for standard lock nuts
- ▲ Version HDC = for HDC lock nuts



84 950 ...

for lock nut	DLN mm	
4004E / ER08 CP mini	10	050 <sup>1)</sup>
4008E / ER 11 CP mini	16	080 <sup>1)</sup>
426E / ER 16 CP / ER 16 mini	22	026 <sup>1)</sup>
426E / ER 16 CP Conical	24	082 <sup>2)</sup>
426E / ER 16 CP	30	027
426E / ER 16 STD	32	028
430E / ER 25 CP	40	054
470E / ER 32 CP + STD	50	056
470E / ER 32 HDC	53	30200
472E / ER 40 CP + STD	63	057

- 1) Special key for mini lock nuts
- 2) Key for tapered lock nuts

## Torque key



84 435 ...

TQX Nm	Square mm	
5 - 30	9 x 12	030
10 - 80	9 x 12	080
20 - 200	14 x 18	200

## Additional roll key device for torque key

- ▲ Version CP = for Centro-P lock nuts
- ▲ Version STD = for standard lock nuts
- ▲ Version HDC = for HDC lock nuts




84 950 ...

for lock nut	DLN mm	TQX Nm	Square mm	
4008E / ER 11 CP mini	16	5 - 30	9 x 12	060 <sup>1)</sup>
426E / ER 16 CP / ER 16 mini	22	5 - 30	9 x 12	170 <sup>1)</sup>
426E / ER 16 CP Conical	24	10 - 80	9 x 12	061 <sup>2)</sup>
426E / ER 16 CP	30	20 - 200	14 x 18	171
426E / ER 16 STD	32	20 - 200	14 x 18	172
430E / ER 25 CP	40	20 - 200	14 x 18	065
470E / ER 32 CP + STD	50	20 - 200	14 x 18	067
470E / ER 32 HDC	53	20 - 200	14 x 18	30300
472E / ER 40 CP + STD	63	20 - 200	14 x 18	068



- 1) For mini lock nuts
- 2) For tapered lock nuts

### Mini ER lock nut



for collet	THSZMS	DLN mm	HLN mm	TQX Nm	62 950 ...
4004E (ER08)	M10x0,75	12	11,0	8	067
4008E (ER11)	M13x0,75	16	12,0	18	065
426E (ER16)	M19x1	22	18,0	28	066
428E (ER20)	M24x1	28	19,5	35	068
430E (ER25)	M30x1	35	21,0	40	069


### ER Lock nut



for seals

for collet	THSZMS	DLN mm	HLN mm	62 950 ...	83 950 ...
426E (ER16)	M22x1,5	32	17,0	054	054
428E (ER20)	M25x1,5	35	23,2		
430E (ER25)	M32x1,5	42	20,0	055	055
430E (ER25)	M32x1,5	42	24,7		
470E (ER32)	M40x1,5	50	22,3	65600	056
470E (ER32)	M40x1,5	50	27,0		
472E (ER40)	M50x1,5	63	25,3	65700	057
472E (ER40)	M50x1,5	63	30,7		

### Mini ER lock nut for sealing rings



for seals

for collet	THSZMS	DLN mm	HLN mm	TQX Nm	83 950 ...
426E (ER16-DS)	M19x1	22	22,0	28	058
428E (ER20-DS)	M24x1	28	23,2	35	059
430E (ER25-DS)	M30x1	35	24,7	40	060

### Y clamping key




83 357 ...

for lock nut	83 357 ...
ER 16	116
ER 20	12000
ER 25	125
ER 32	132
ER 40	140

### ER Lock nut

▲ DRVS = Drive size



### ER Mini clamping key



83 950 ...


for collet	83 950 ...
4004E (ER08)	099
4008E (ER11)	100
426E (ER16)	101
428E (ER20)	102
430E (ER25)	103

62 950 ...

for collet	THSZMS	DRVS mm	DLN mm	HLN mm	62 950 ...
426E (ER16)	M22x1,5	25	28	18,0	044
428E (ER20)	M25x1,5	30	34	19,5	045

# Quick change tap adapter with overload clutch

- ▲ Adapter with adjustable overload clutch
- ▲ for use with taps

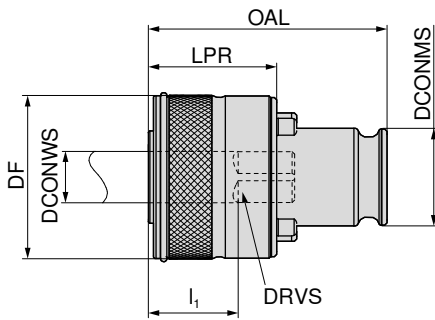


83 612 ...

SZID	DCONWS	DRVS	DIN 371	DIN 374 / 376	DF	DCONMS	OAL	$l_1$	LPR	
	mm	mm			mm	mm	mm	mm	mm	
01	2,8	2,1	M2		33	19	46,5	17	25	100
01	2,8	2,1	M2,5		33	19	46,5	17	25	101
01	3,5	2,7	M3		33	19	46,5	17	25	102
01	4,0	3,0	M3,5		33	19	46,5	17	25	103
01	4,5	3,4	M4		33	19	46,5	17	25	104
01	6,0	4,9	M4,5		33	19	46,5	17	25	105
01	6,0	4,9	M5		33	19	46,5	17	25	106
01	4,5	3,4		M6	33	19	46,5	17	25	107
01	6,0	4,9	M6		33	19	46,5	17	25	108
01	5,5	4,3		M7	33	19	46,5	17	25	109
01	7,0	5,5	M7		33	19	46,5	17	25	110
01	6,0	4,9		M8	33	19	46,5	17	25	111
01	8,0	6,2	M8		33	19	46,5	17	25	112
01	9,0	7,0	M9		33	19	46,5	17	25	113
01	7,0	5,5		M10	33	19	46,5	17	25	114
01	10,0	8,0	M10		33	19	46,5	17	25	115
01	8,0	6,2		M11	33	19	46,5	17	25	116
01	9,0	7,0		M12	33	19	46,5	17	25	117
02	6,0	4,9	M4,5 - M6		50	31	69,0	30	34	200
02	6,0	4,9	M7 (DIN 352)		50	31	69,0	30	34	201
02	7,0	5,5	M7		50	31	69,0	30	34	202
02	6,0	4,9		M8	50	31	69,0	30	34	203
02	8,0	6,2	M8		50	31	69,0	30	34	204
02	9,0	7,0	M9		50	31	69,0	30	34	205
02	7,0	5,5		M10	50	31	69,0	30	34	206
02	10,0	8,0	M10		50	31	69,0	30	34	207
02	8,0	6,2		M11	50	31	69,0	30	34	208
02	9,0	7,0		M12	50	31	69,0	30	34	209
02	11,0	9,0		M14	50	31	69,0	30	34	210
02	12,0	9,0		M16	50	31	69,0	30	34	211
02	14,0	11,0		M18	50	31	69,0	30	34	212
02	16,0	12,0		M20	50	31	69,0	30	34	213

# Quick change tap adapter with overload clutch, with through coolant

- ▲ Adapter with adjustable overload clutch
- ▲ for use with taps

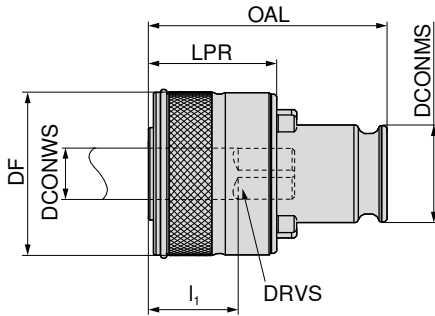


83 616 ...

SZID	DCONWS mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	I <sub>1</sub> mm	LPR mm	
01	3,5	2,7	M3	M4,5 - M5	33	19	46,5	17	25	100
01	4,5	3,4	M4	M6	33	19	46,5	17	25	102
01	5,5	4,3		M7	33	19	46,5	17	25	104
01	6,0	4,9	M4,5 - M6	M8	33	19	46,5	17	25	106
01	7,0	5,5	M7	M10	33	19	46,5	17	25	108
01	8,0	6,2	M8	M11	33	19	46,5	17	25	110
01	9,0	7,0	M9	M12	33	19	46,5	17	25	112
01	10,0	8,0	M10		33	19	46,5	17	25	114
01	11,0	9,0		M14	33	19	46,5	17	25	116
02	6,0	4,9	M4,5 - M6	M8	50	31	69,0	30	34	200
02	7,0	5,5	M7	M10	50	31	69,0	30	34	202
02	8,0	6,2	M8	M11	50	31	69,0	30	34	204
02	9,0	7,0	M9	M12	50	31	69,0	30	34	206
02	10,0	8,0	M10		50	31	69,0	30	34	208
02	11,0	9,0		M14	50	31	69,0	30	34	210
02	12,0	9,0	M12	M16	50	31	69,0	30	34	212
02	14,0	11,0		M18	50	31	69,0	30	34	214
02	16,0	12,0		M20	50	31	69,0	30	34	216



# Quick change tap adapter

- ▲ Normal version without overload clutch
- ▲ For mounting taps
- ▲ For right-hand and left-hand threads


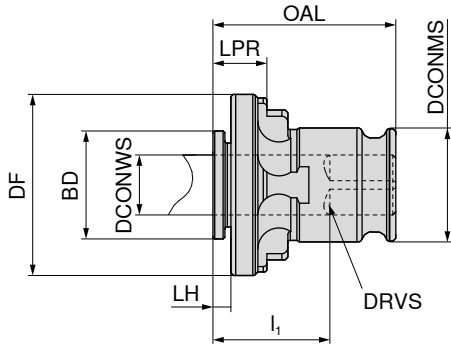


83 610 ...

SZID	DCONWS mm	BD mm	DRVS mm	DIN 371	DIN 374 / 376	DF mm	DCONMS mm	OAL mm	LH mm	I <sub>1</sub> mm	LPR mm	
01	3,5	18	2,7	M3		30,2	19	31	3,5	17	9,5	100
01	4,5	18	3,4	M4		30,2	19	31	3,5	17	9,5	101
01	4,0	18	3,0	M3,5		30,2	19	31	3,5	17	9,5	102
01	2,8	18	2,1	M2 - M2,6		30,2	19	31	3,5	17	9,5	103
01	5,5	18	4,3		M7	30,2	19	31	3,5	17	9,5	104
01	6,0	18	4,9	M4,5 - M6	M8	30,2	19	31	3,5	17	9,5	105
01	7,0	18	5,5	M7	M10	30,2	19	31	3,5	17	9,5	106
01	8,0	18	6,2	M8	M11	30,2	19	31	3,5	17	9,5	107
01	9,0	18	7,0	M9	M12	30,2	19	31	3,5	17	9,5	108
01	10,0	18	8,0	M10		30,2	19	31	3,5	17	9,5	109
01	11,0	18	9,0		M14	30,2	19	31	3,5	17	9,5	110
02	6,0	26	4,9	M4,5 - M6		46,3	31	46	2,5	30	11,0	200
02	7,0	26	5,5	M7		46,3	31	46	2,5	30	11,0	201
02	8,0	26	6,2	M8		46,3	31	46	2,5	30	11,0	202
02	9,0	26	7,0	M9		46,3	31	46	2,5	30	11,0	203
02	10,0	26	8,0	M10		46,3	31	46	2,5	30	11,0	204
02	11,0	26	9,0		M14	46,3	31	46	2,5	30	11,0	205
02	12,0	26	9,0		M16	46,3	31	46	2,5	30	11,0	206
02	14,0	26	11,0		M18	46,3	31	46	2,5	30	11,0	207
02	16,0	26	12,0		M20	46,3	31	46	2,5	30	11,0	208
02	18,0	26	14,5		M22 - M24	46,3	31	46	2,5	30	11,0	209

## Quick change tap adapter, with through coolant

- ▲ Normal version without overload clutch
- ▲ For mounting taps
- ▲ For right-hand and left-hand threads

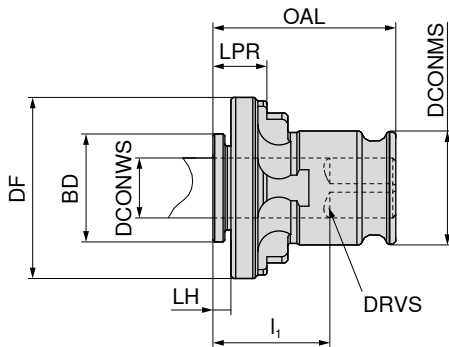


83 614 ...

SZID	DCONWS	BD	DRVS	DIN 371	DIN 374 / 376	DF	DCONMS	OAL	LH	I <sub>1</sub>	LPR	
	mm	mm	mm			mm	mm	mm	mm	mm	mm	
01	3,5	18	2,7		M4,5 - M5	30,2	19	31	3,5	17	9,5	100
01	4,5	18	3,4	M4	M6	30,2	19	31	3,5	17	9,5	102
01	5,5	18	4,3		M7	30,2	19	31	3,5	17	9,5	104
01	6,0	18	4,9	M4,5 - M6	M8	30,2	19	31	3,5	17	9,5	106
01	7,0	18	5,5	M7	M10	30,2	19	31	3,5	17	9,5	108
01	8,0	18	6,2	M8	M11	30,2	19	31	3,5	17	9,5	110
01	9,0	18	7,0	M9	M12	30,2	19	31	3,5	17	9,5	112
01	10,0	18	8,0	M10		30,2	19	31	3,5	17	9,5	114
02	6,0	26	4,9	M4,5 - M6	M8	46,3	31	46	2,5	30	11,0	200
02	7,0	26	5,5	M7	M10	46,3	31	46	2,5	30	11,0	202
02	8,0	26	6,2	M8	M11	46,3	31	46	2,5	30	11,0	204
02	9,0	26	7,0	M9	M12	46,3	31	46	2,5	30	11,0	206
02	10,0	26	8,0	M10		46,3	31	46	2,5	30	11,0	208
02	11,0	26	9,0		M14	46,3	31	46	2,5	30	11,0	210
02	12,0	26	9,0	M12	M16	46,3	31	46	2,5	30	11,0	212
02	14,0	26	11,0		M18	46,3	31	46	2,5	30	11,0	214
02	16,0	26	12,0		M20	46,3	31	46	2,5	30	11,0	216

## Reducing adapter for quick change adapters

- ▲ Reducing adapter for reducing size 02 to 01. In this way the clamping ranges can be extended to smaller sizes.

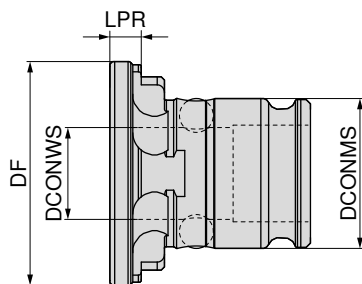


83 624 ...

SZID	DF	DCONMS	DCONWS	LPR	
	mm	mm	mm	mm	
02	46	31	19	8,5	200

## Quick change tap adapters

▲ Adapters for collets ER 16 / ER 25

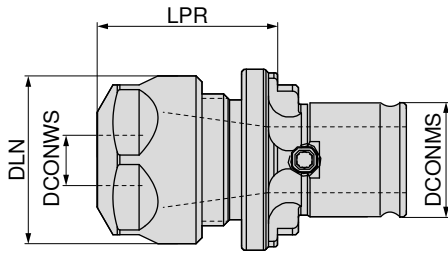

83 618 ...


SZID	DCONWS mm	DLN mm	DCONMS mm	LPR mm	for collet
01	1 - 10	28	19	29,5	ER 16
02	2 - 16	42	31	38,5	ER 25

010 <sup>1)</sup>  
016

1) with 6 position lock nut

## Quick change adapter for dies

▲ For mounting dies according to DIN 223

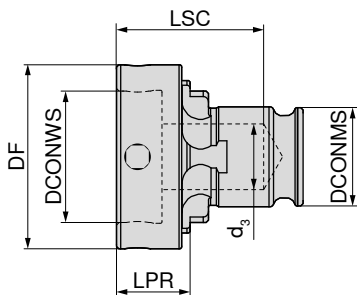

83 622 ...

SZID	for size	DF mm	DCONMS mm	DCONWS mm	LPR mm	d <sub>3</sub> mm	LSC mm
01	16 x 5	25	19	16	9	12,5	23
01	20 x 5	30	19	20	9	12,5	23
01	20 x 7	30	19	20	11	12,5	25
01	25 x 9	35	19	25	14	12,5	28
01	38 x 10	48	19	38	15	14,2	29
01	30 x 11	40	19	30	16	12,5	30
01	38 x 14	48	19	38	19	14,2	33
02	20 x 5	30	31	20	22	15,0	57
02	20 x 7	30	31	20	22	15,0	57
02	25 x 9	35	31	35	22	15,0	57
02	38 x 10	48	31	38	22	22,0	57
02	30 x 11	40	31	30	22	22,0	57
02	38 x 14	48	31	38	25	22,0	60
02	45 x 14	57	31	45	29	22,0	64
02	45 x 18	57	31	45	29	22,0	64

116  
120  
121  
125  
138  
130  
139  
220  
221  
225  
238  
230  
239  
245  
246

## MultiChange – Spanner




DRVS mm	TQX Nm	84 357 ...
6	5	006
8	12,5	008
10	15	010
13	20	013
16	25	016
19	25	019 <sup>1)</sup>
21	25	021 <sup>1)</sup>
24	25	024 <sup>1)</sup>

1) only for MultiChange reamers

## Assembly instructions for MultiChange head

- ▲ Cleaning of cone, thread and face of the milling head
- ▲ Cleaning of cone and thread face of the holder
- ▲ Cleaning of cone, thread and face of the holders
- ▲ Cutter head screwed clockwise by hand into the holder (be careful if using gloves)
- ▲ Clamp the exchange milling head with the torque wrench and the correct spanner to the specified tightening torque (according to table).
- ▲ The gap between the head and holder must be closed (force and positive connection)

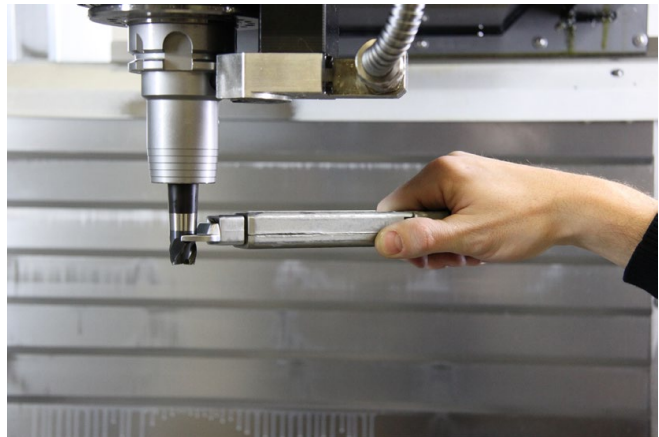


*Torque wrench must be horizontally aligned to key area, take care not to tilt in the key area*

## MultiChange – Spanner Head




DRVS mm	TQX Nm	Square mm	84 358 ...
6	5	9 x 12	006
8	12,5	9 x 12	008
10	15	9 x 12	010
13	20	9 x 12	013
16	25	9 x 12	016
19	25	9 x 12	190
19	25	14 x 18	019 <sup>1)</sup>
21	25	9 x 12	210
21	25	14 x 18	021 <sup>1)</sup>
24	25	9 x 12	240
24	25	14 x 18	024 <sup>1)</sup>

1) only for MultiChange reamers

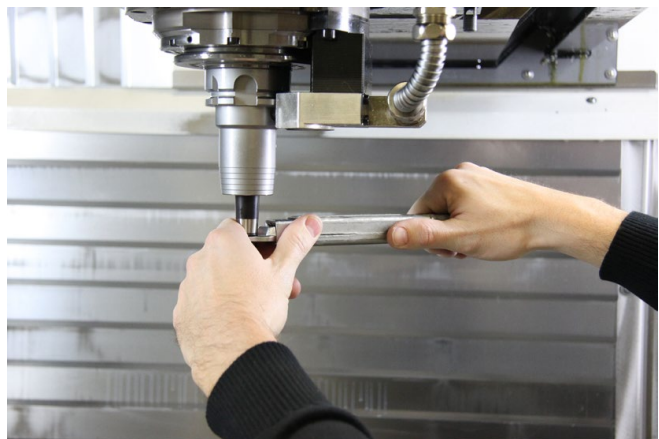

*Important for the sensitive tuning is an additional placing of the hand on the exchange milling head. This means the torque can be better maintained.*

 Suitable torque keys can be found on → **Page 286.**

### TORX® Screwdriver



80 950 ...

Size	LB mm	TQX Nm	
T05	35	0,5	082
T06	35	0,9	083
T07	35	1,7	084
T08	40	2,6	085
T09	40	3,4	086
T10	40	4,5	087
T15	45	7,7	088
T20	45	12,7	089

### TORX® Screwdriver sets



80 950 ...

Size	
T06, T07, T08, T09, T10, T15, T20	090

### TORX PLUS® Screwdriver



80 950 ...

Size	LB mm	TQX Nm	
T05-IP	35	0,5	057
T06-IP	35	0,9	058
T07-IP	35	1,7	059
T08-IP	40	2,6	060
T09-IP	40	3,4	061
T10-IP	40	4,5	062
T15-IP	45	7,7	063
T20-IP	45	12,7	064

### TORX PLUS® Screwdriver sets



80 950 ...

Size	
T06IP, T07IP, T08IP, T09IP, T10IP, T15IP, T20IP	091

### Clamping key



80 397 ...

DRVS mm	TQX Nm	
2	1,9	020
2,5	3,8	025
3	6,6	030
4	16	040
5	30	050
6	52	060
8	120	080
10	220	100

### Allen keys with cross handle – set

▲ 7-piece Allen key set in workbench stand



80 397 ...

Size	
SW2, SW2,5, SW3, SW4, SW5, SW6, SW8	99900

### TORX® Screwdriver



80 950 ...

Size	LB mm	
T06	60	100
T07	60	101
T08	60	102
T09	60	103
T10	80	104
T15	80	105
T20	100	106
T25	100	107
T30	115	092

### TORX PLUS® Screwdriver



80 950 ...

Size	LB mm	
T06-IP	60	116
T07-IP	60	117
T08-IP	60	039
T09-IP	60	118
T10-IP	80	119
T15-IP	80	120
T20-IP	100	121
T25-IP	100	122

### TORX® MagicSpring®



80 950 ...

Size	LB mm	
MS T06	60	108
MS T07	60	109
MS T08	60	110
MS T09	60	111
MS T10	80	112
MS T15	80	113
MS T20	100	114
MS T25	100	115
MS T30	100	131

### TORX PLUS® MagicSpring®



80 950 ...

Size	LB mm	
MS T06-IP	60	123
MS T07-IP	60	124
MS T08-IP	60	125
MS T09-IP	60	126
MS T10-IP	80	127
MS T15-IP	80	128
MS T20-IP	100	129



A stainless steel spring holds MagicSpring® Torx® and Torx Plus® screws in place.



## TorqueFix® Handle

- ▲ with fixed torque moment
- ▲ Standard: EN ISO 6798, BS EN 26789, ASME B107.14M
- ▲ Accuracy: ± 6 %, based on national standards
- ▲ Bits to be clamped in the universal holder only



80 021 ...

TQX Nm	
0,4	00400
0,5	00500
0,6	006
0,7	007
0,8	008
0,9	00900
1	010
1,1	01100
1,2	012
1,5	01500
1,6	016
2	020
2,5	02500
3	030
3,2	032
3,8	03800
4	040
5	050
5,5	055
6	060
7,2	07200

## easyTorque® Handle

- ▲ with a fixed torque
- ▲ Accuracy: ± 10%
- ▲ Bits can only be clamped in the universal holder



NEW

80 024 ...

TQX Nm	DRVS mm	BD mm	OAL mm	WT kg	
0,5	4	34	130	0,950	00500
0,6	4	34	130	0,950	00600
0,9	4	34	130	0,940	00900
1,1	4	34	130	0,101	01100
1,2	4	34	130	0,990	01200
1,4	4	34	130	0,101	01400
2,0	4	34	130	0,101	02000
2,5	4	34	130	0,106	02500
3,0	4	34	130	0,104	03000
3,8	4	34	130	0,105	03800
4,0	4	34	130	0,105	04000
4,5	4	34	130	0,105	04500
5,0	4	34	130	0,105	05000

## TorqueFix® key

- ▲ With fixed torque
- ▲ Ergonomic key handle, extremely easy to use thanks to compact design
- ▲ Specially designed for difficult to access screws and constricted openings
- ▲ Click signal when the set torque value is reached
- ▲ Standards: DIN EN ISO 6789
- ▲ Accuracy: ± 6%, traceable to national standards

### Scope of supply:

incl. Plastic box and inspection report



80 392 ...

TQX Nm	DRVS mm	
0,5	4	00500
0,6	4	00600
0,9	4	00900
1,1	4	01100
1,2	4	01200
1,4	4	01400
2,0	4	02000
2,5	4	02500
3,0	4	03000
3,8	4	03800
4,0	4	04000

## TorqueVario®-S

- ▲ Patented handle

### Scope of supply:

incl. Torque-Setter setting tool



80 950 ...

TQX Nm	
0,4 - 1,0	046
0,5 - 2,0	191
0,8 - 5,0	192
2,0 - 7,0	193

## Universal holder for Bits

- ▲ 162 mm long



80 950 ...

for	
DIN3126-C/E 6,3-1/4"	014

## Interchangeable blade for hex drive



Size	TQX Nm	short 75 mm	long 175 mm
		80 393 ...	80 950 ...
SW1,5	0,9	01500	151
SW2	1,8	02000	152
SW2,5	3,8	02500	153
SW3	5,5	03000	154
SW4	8,0	04000	155

## Replaceable Blade for TORX®



Size	TQX Nm	short 75 mm	long 175 mm
		80 394 ...	80 950 ...
T05	0,4		048
T06	0,6	00600	031
T07	0,9	00700	032
T08	1,3	00800	033
T09	2,5	00900	034
T10	3,8	01000	035
T15	5,5	01500	036
T20	8,0	02000	037
T25	8,0	02500	038

## Replaceable Blade for TORX PLUS®



Size	TQX Nm	long 175 mm
		80 950 ...
T05-IP	0,5	049
T06-IP	0,8	050
T07-IP	1,3	051
T08-IP	2,0	043
T09-IP	3,0	052
T10-IP	4,5	053
T15-IP	6,6	054
T20-IP	8,0	055
T25-IP	8,0	056



Interchangeable blade, short 75 mm, suitable for TorqueFix® Key article number 80 392 ... → **Page 296.**

Interchangeable blade, long 175 mm, suitable for TorqueFix® Grip article number 80 021 ... and TorqueVario®-S article number 80 950 ... → **Page 296.**



### TORX® Bits short (25 mm)

▲ DIN3126-C 6,3 – 1/4"



80 950 ...

Size	TQX Nm	
T06	0,9	015
T07	1,7	016
T08	2,6	017
T09	3,4	018
T10	4,5	019
T15	7,7	020
T20	12,7	021
T25	19	022
T30	37,4	093

### TORX® Bits long (50 mm)

▲ DIN3126-E 6,3 – 1/4"



80 950 ...

Size	TQX Nm	
T06	0,9	023
T07	1,7	024
T08	2,6	025
T09	3,4	026
T10	4,5	027
T15	7,7	028
T20	12,7	029
T25	19	030
T30	37,4	094

### TORX PLUS® Bits short (25 mm)

▲ DIN3126-C 6,3 – 1/4"



80 950 ...

Size	TQX Nm	
T08-IP	2,6	068
T09-IP	3,4	069
T10-IP	4,5	070
T15-IP	7,7	071
T20-IP	12,7	072
T25-IP	19	073

### TORX PLUS® Bits long (50 mm)

▲ DIN3126-E 6,3 – 1/4"



80 950 ...

Size	TQX Nm	
T08-IP	2,6	040
T09-IP	3,4	077
T10-IP	4,5	078
T15-IP	7,7	079
T20-IP	12,7	080
T25-IP	19	081

### Bit – hexagonal (50 mm)

▲ DIN3126-E 6,3 – 1/4"



80 398 ...

Size	
SW1,5	01500
SW2	02000
SW2,5	02500
SW3	03000
SW3,5	03500
SW4	04000
SW4,5	04500
SW5	05000
SW6	06000
SW8	08000

### TORX PLUS® Allen key



80 951 ...


Size	OAL mm	
T07-IP	44	00700
T08-IP	47	00800
T09-IP	51	00900
T10-IP	54	01000
T15-IP	58	01500
T20-IP	62	02000
T25-IP	67	02500
T27-IP	73	02700
T30-IP	79	03000
T40-IP	88	04000

### Universal 3D-tester

- ▲ Quick and accurate positioning
- ▲ For locating and/or setting the zero point of the workpiece
- ▲ with adjustable concentricity
- ▲ Usable in all 3 axes (x, y, z)
- ▲ For all CNC and erosion machines (insulation between stylus and case)
- ▲ Reading of actual dimensions is independent of direction
- ▲ Reading precision 0.01 mm

**Scope of supply:**

3D tester including tracer insert and Allen key

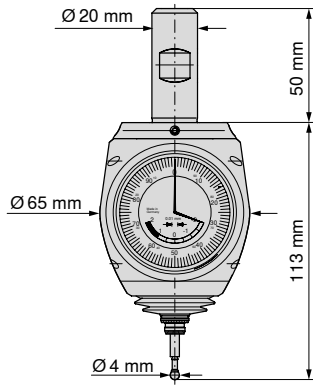

85 290 ...

Universal-3D-Tester


100

### Digital 3D tester

- ▲ Quick and accurate positioning
- ▲ For locating and/or setting the zero point of the workpiece
- ▲ with adjustable concentricity
- ▲ Usable in all 3 axes (x, y, z)
- ▲ For all CNC and erosion machines (insulation between stylus and case)
- ▲ Reading of actual dimensions is independent of direction
- ▲ Reading precision 0.001 mm

**Scope of supply:**

3D tester including tracer insert and Allen key

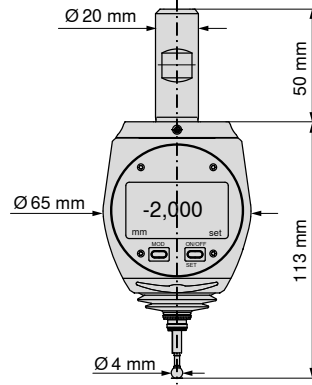

85 291 ...

Digital 3D Tester

100

### Zero height setting gauge

- ▲ to determine the point of reference and/or for adjusting tools „to zero“
- ▲ Plate Ø 10 mm
- ▲ Plate is hardened, non magnetic




85 900 ...

OAH  
mm  
100

018

### Stylus for 3D-tester

- ▲ With movement of 2 mm beyond the zero point a break-off ceramic insert prevents damage to the unit
- ▲ If the stylus is broken remove and insert a new stylus
- ▲ Check concentricity and adjust if necessary



85 290 ...

LPR  
mm  
25  
65


102  
104

## Universal 3D-Tester HQ

- ▲ fast and accurate positioning at reference edges
- ▲ Development of the existing universal 3D-Testers
- ▲ improved mechanics
- ▲ compact size
- ▲ characterised by over travel safety
- ▲ Functionality as with 85 290 100
- ▲ Accuracy 0,01 mm

### Scope of supply:

3D tester including tracer insert and Allen key



85 292 ...

Universal 3D-Tester HQ


100

## Centre finder

- ▲ Centralise holes and features quickly and accurately
- ▲ simple operation
- ▲ Dial gauge remains in the operators vision during process
- ▲ Centring accuracy 0,003 mm

### Scope of supply:

3D-Tester incl. straight stylus and telescopic stop

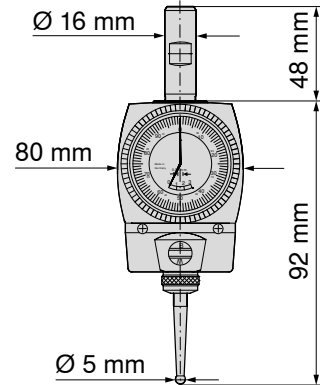

85 299 ...

Centre finder

100




Range with probe tip Ø 5 mm holes  
Ø 6–125 mm, shaft Ø 0–125 mm

## Universal 3D-Tester Mini

- ▲ fast and accurate positioning at reference edges
- ▲ very small universal 3D-Tester
- ▲ particularly suitable for machines with small spindle taper  
e.g. SK 30 or HSK 32
- ▲ low overhang length thanks to short housing
- ▲ characterised by over travel safety
- ▲ Functionality as with 85 290 100
- ▲ Accuracy 0,01 mm

### Scope of supply:

3D tester including tracer insert and Allen key




85 295 ...

Universal 3D-Tester Mini

100

## Stylii for Centre Finder

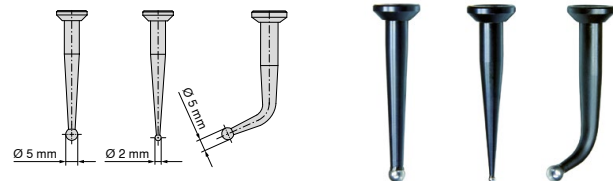

85 299 ...

Straight stylus / Ball-Ø 2 mm

102

Straight stylus / Ball-Ø 5 mm

104

Curved stylus / Ball Ø 5 mm

106

## Telescopic rod for Centre Finder



85 299 ...

DCONMS mm	OAL mm
6	478


111

## Advantages with the use of the cool air nozzle

The main advantages are that cooling agent disposal is not required and tool life increases up to 100 % when dry machining

In order to improve the service life when dry machining, we recommend the use of our cooling nozzle, which is applicable with a normal compressed air connection from a pressure of 6 bar.

Not only for cooling the tool and workpiece it is primarily for chip removal to prevent chip jamming.

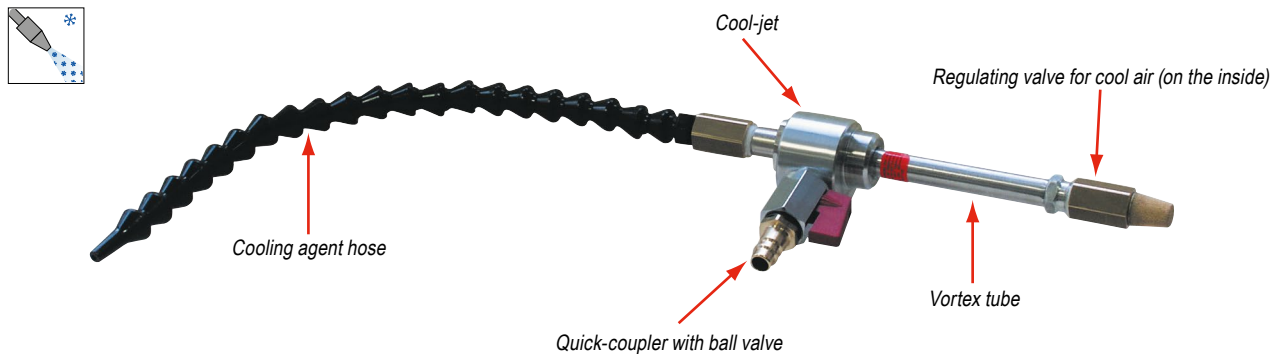


<b>Cool-jet</b>	<b>81 900 ...</b>	<b>81 900 ...</b>
3–7 bar air pressure, at -46 °C	<b>100</b>	
<b>Accessories</b>		
Magnetic plate Ø 80 mm without clamping arm		<b>101</b>
Spare tube, length 300 mm		<b>104</b>
Jet silencer (air filter)		<b>105</b>
Clamping arm, length 75 mm		<b>106</b>
Complete set (with magnetic set and clamping arm), weight 0,4 kg		<b>107</b>

## Technical description – operating instruction


The principle of the cold-air nozzle is based on the use of vortex tubes. Ordinary air is divided into cold and hot air streams.

**Without additional power supply** or moving parts the cool air nozzle can produce **cooling performance of up to 733 W** or **Temperatures of approx. -42 °C** are produced and requires only operating pressure air of approx. 6 bar.

A water trap or service unit should be mounted. A regulating valve in the hot-air outlet regulates the temperatures and currents

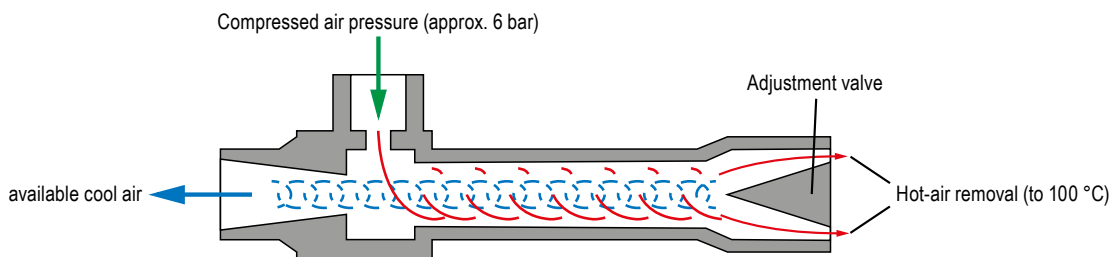

**1** Utilizable air temperature measured at the effective discharge of the vortex tube (not the nozzle end)


**1**  Air consumption at an inlet temperature of +21 °C and an inlet pressure of 6.9 bar: 7,08 l / sec. (25.5 m³ / h)

Entrance pressure	3 bar	-31 °C	up to	-6 °C
	4 bar	-35 °C	up to	-8 °C
	5 bar	-39 °C	up to	-10 °C
	6 bar	-42 °C	up to	-11 °C
	7 bar	-46 °C	up to	-13 °C

**1** In order to operate the regulating valve, the silencer must be unscrewed – there is a burn danger! The valve of the hot air side can reach up to 100 °C: Before contact, allow cooling!

## Cleaning propeller

- ▲ Chip and emulsion removal or drying processes via the tool spindle
- ▲ Simple replacement of the rotor blades

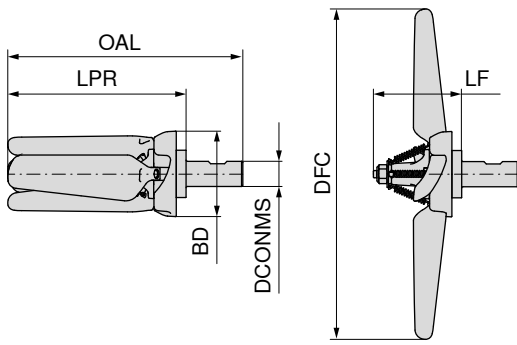

IK central


80 399 ...

DCONMS	OAL	LPR	LF	DFC	BD	RPMX
mm	mm	mm	mm	mm	mm	1/min.
20	186,3	141,3	69,75	254	67,68	5000 - 8000

02000

## Cleaning propeller

- ▲ Chip and emulsion removal or drying processes via the tool spindle
- ▲ Simple replacement of the rotor blades

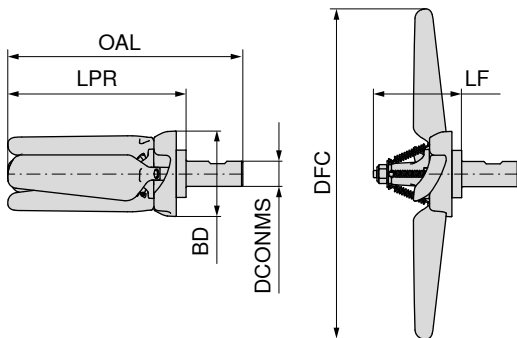

IK central

80 399 ...

DCONMS	OAL	LPR	LF	DFC	BD	RPMX
mm	mm	mm	mm	mm	mm	1/min.
20	135	90	70	160	68	6000 - 12000

16000

## Rotor blade kit



1 rotary blade  
and 1 tension  
spring

4 rotary blades  
and 4 tension  
springs

80 399 ...

80 399 ...

Size	80 399 ...	80 399 ...
Large	30100	30200
Small	36000	46000

## Driven Tools

CERATIZIT offers a comprehensive portfolio of driven tool holders for the turrets or machines of leading manufacturers. There is almost no limit to the range of types available. You will find a small selection of our holders here.

### Examples from our driven tooling range



*Axial drilling and milling head*



*Radial drilling and milling head*



*Rear offset radial drilling and milling head*



*Double radial drilling and milling head*



*Double axial drilling and milling head*



*Offset axial drilling and milling head*



*Swivel head*



*Modular milling*

### Summary of machine turret manufacturers and interfaces for which CERATIZIT can supply driven tools

- |              |           |                      |                 |
|--------------|-----------|----------------------|-----------------|
| ▲ Sauter     | ▲ DIN1809 | ▲ Baruffaldi Toem    | milling         |
| ▲ Baruffaldi | ▲ DIN5480 | ▲ Bevel gear milling | ▲ BMT (bolt on) |
| ▲ Duplomatic | ▲ DIN5482 | ▲ Spline / tooth     |                 |

### Technical Advice

Are you interested in our driven tools ? If so please contact your technical sales engineer who will be glad to assist you. Alternatively, you can contact our office based internal technical sales engineers who can be reached on our freephone number.

### Enquiry Form

Should you have questions about driven tools you can find a detailed questionnaire on our website in the download area. Carefully complete the form and send it via e-mail or printed fax → [cutting.tools/en/download](mailto:cutting.tools/en/download)

## Modular quick-change system for driven tools

You want to optimize your setup time? CERATIZIT offers you several options! With each axial and radial driven tool you are prepared through the exchange of different modules for different machining demands.

### Varia VX

The new quick change system for heavy duty machining


The face & taper contact interface ensures maximum concentricity. The torque is transmitted via a form-fitting polygon, which can transmit up to 200 Nm.

Clamping and releasing takes place via a segmented gear wheel equipped with 3 multifunctional cams. When tightened with a radially mounted clamping screw, the 3-point clamping pulls the tool evenly into its operating position. When releasing the tool force is applied mechanically via a sliding cam and the tool is released for removal from the adapter.



The advantages at a glance

- ▲ Cutting tools are preset off the machine
- ▲ Quick change thanks to only one clamping point
- ▲ No risk of injury when changing tools
- ▲ Transverse force-free clamping of the tools
- ▲ Safe torque transmission
- ▲ No loose parts

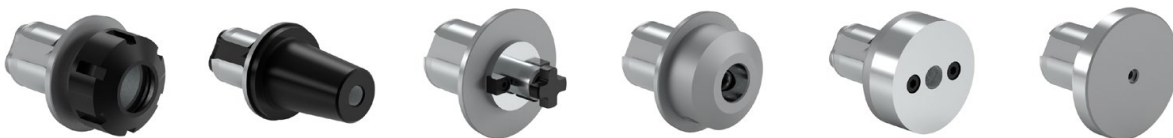

### System Preci-Flex® – The stable solution for long tool life and high surface quality


The internal cone of the driven tool is suitable for any commercial type ER collets. Through taper & face contact  $\leq 0.01$  mm system concentricity and  $\leq 0.005$  mm repeatability is achieved and four plane-side clamp screws achieve maximum system stability and rigidity.



The program includes base holders for the collet sizes ER20, ER25, ER32, ER40 and ER50 and collet holders with male or female nut, adapters Weldon, Whistle Notch, shrink, boring bars, Shell mill arbors, hydraulic chucks, Test arbors and blanks. Also available for static VDI holders and rotating SK and HSK holders.




## Quick-Change

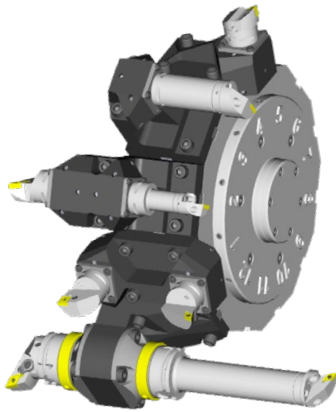


The tool holder range comprises both innovative and technologically proven solutions for all common CNC turning centres. We offer solutions that are perfectly tailored to the make of machine, regardless of whether the machine has a BMT, VDI or other connection type.


Every quick-change system has a standardised interface to DIN/ISO requirements and is available for HSK-T 40/63/100 and PSC 40/50/63 sizes. The tool change itself is carried out quickly and easily, minimising idle times and thus boosting productivity.




Tool holder single and straight





Tool holder double and straight



Single angle tool holder



Double angle tool holder

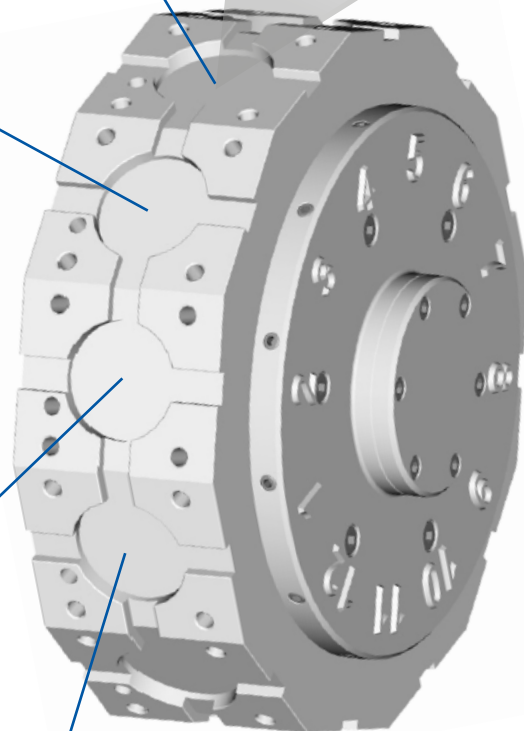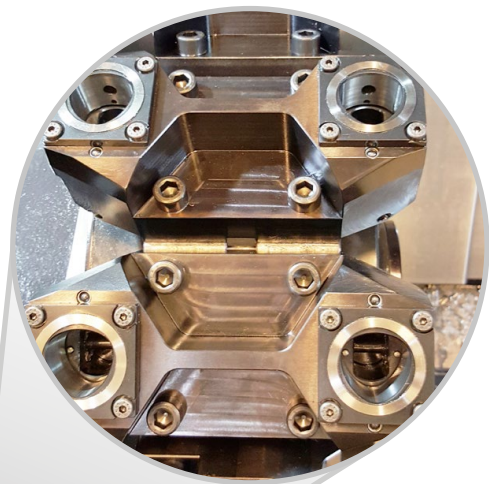


Revolverdisk BMT/VDI/...




## HSK/PSC clamping units

➤ The tool holders are fitted with either an HSK or PSC clamping unit.

➤ Clamping units are available in sizes HSK 40/63/100 and PSC 40/50/63.

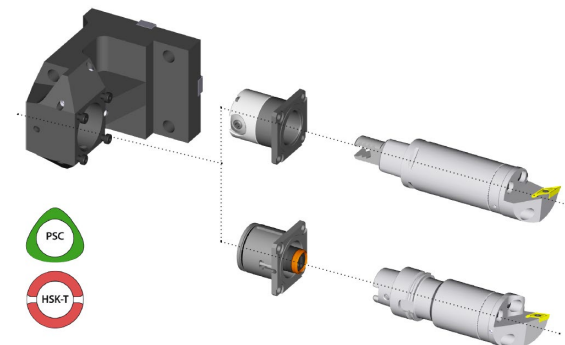


➤ The toolholders permit the flexibility to be adapted to the customer's requirements.

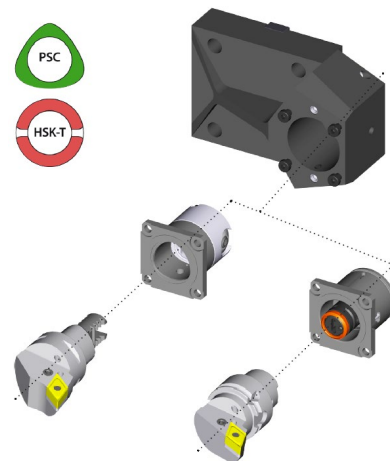

## Online database

Our quick-change tool holders are individually adapted to turning machines to ensure the greatest-possible levels of flexibility and efficiency. Using the online database, systems of previously specified machine types can be evaluated in order to obtain an initial overview.

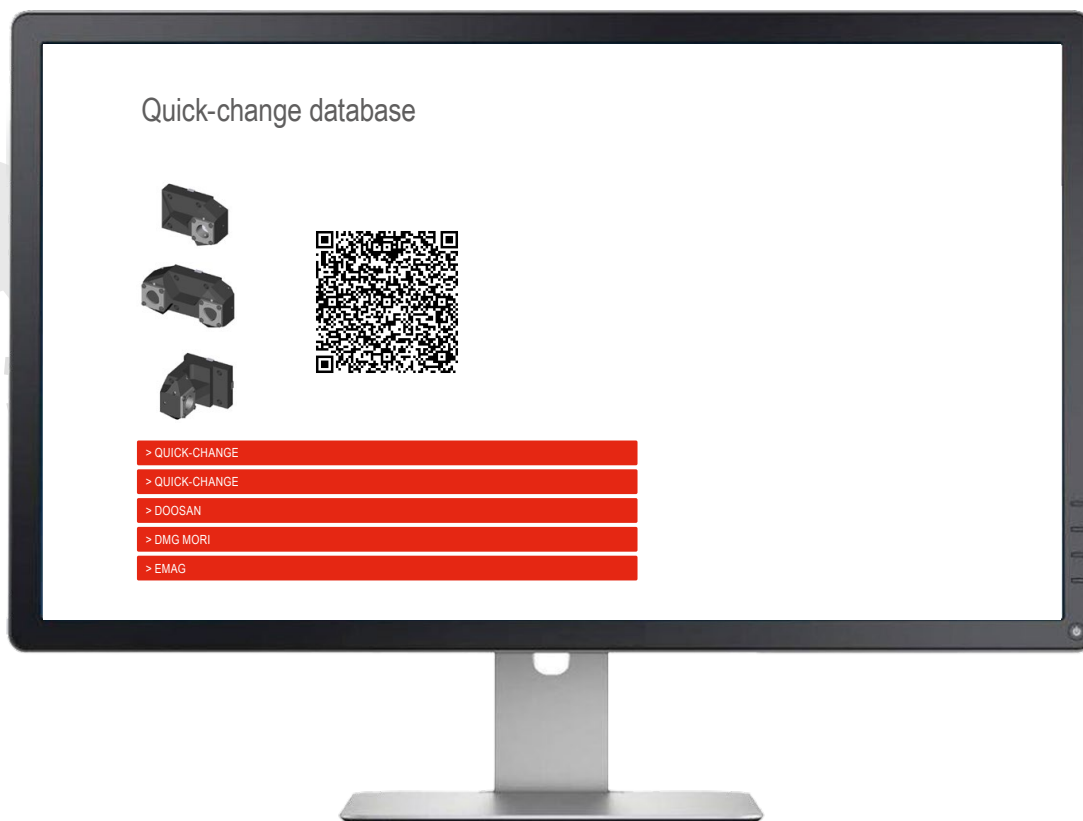


## Information on enquiry process

To make the enquiry process as easy as possible, please use our enquiry form to enter the most important machine data and information on the machining process. Please fill in this form carefully and send it to us by email or fax. → [cutting.tools/en/download-quickchange](https://cutting.tools/en/download-quickchange)


If you have any questions regarding the ordering process or the form itself, your CERATIZIT Technical Sales Engineer will be happy to help.

## Technical data for steep taper tools

### ISO 7388-1 – Form A

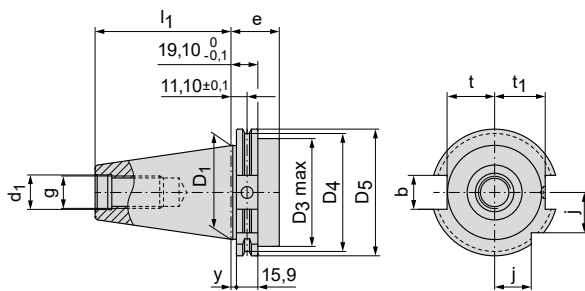


### ISO 7388-1 – 871 Form B

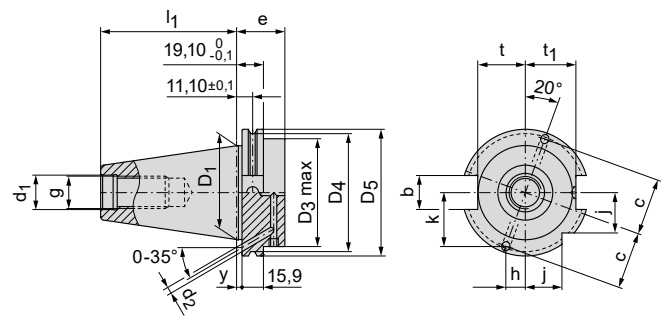

	D <sub>1</sub> mm	D <sub>3 max</sub> mm	D <sub>4</sub> mm	D <sub>5</sub> mm	l <sub>1</sub> <sup>+0.2</sup> mm	g	d <sub>1</sub> <sup>H7</sup> mm	e mm	y <sup>±0.1</sup> mm	t mm	t <sub>1</sub> mm	j mm	d <sub>2</sub> mm	h mm	k mm	c mm	b mm	
<b>SK 30</b>	31,75	45	44,30	50	47,8	M 12	13	35	3,2	16,4	19	15						16,1
<b>SK 40</b>	44,45	50	56,25	63,55	68,4	M 16	17	35	3,2	22,8	25	18,5	4	9,2	25,4	27		16,1
<b>SK 50</b>	69,85	80	91,25	97,5	101,75	M 24	25	35	3,2	35,5	37,7	30	6	14,4	39,5	42		25,7

### ISO 7388-2

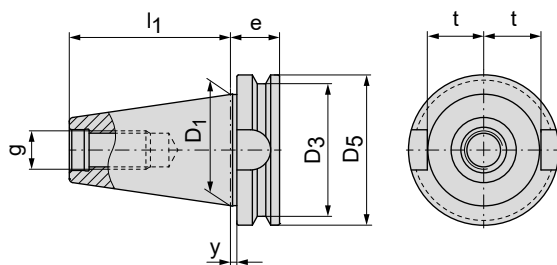

Maximum recommended rpm  
for steep taper toolholders:

SK / BT 30 to 20,000 1/min.


SK / BT 40 to 20,000 1/min.

SK / BT 50 to 16,000 1/min.

	D <sub>1</sub> mm	D <sub>3</sub> mm	D <sub>5</sub> mm	l <sub>1</sub> mm	g	e mm	t mm	y mm	b mm
<b>BT 30</b>	31,75	38	46	48,4	M 12	22	16,3	2	16,1
<b>BT 40</b>	44,45	53	63	65,4	M 16	27	22,5	2	16,1
<b>BT 50</b>	69,85	85	100	101,8	M 24	38	35,3	3,2	25,7

## Technical Data for Polygon shank adapters


### ISO 26623-1

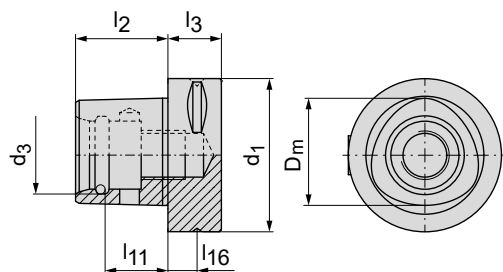

Shank size	d <sub>1</sub> mm	d <sub>3</sub> <sup>±0.05</sup> mm	l <sub>2</sub> <sup>±0.1</sup> mm	l <sub>3</sub> mm	l <sub>11</sub> <sup>±0.1</sup> mm	l <sub>16</sub> mm	D <sub>m</sub> mm
<b>32</b>	32	16,5	19	15	13,5	9	22
<b>40</b>	40	20	24	20	17,5	12	28
<b>50</b>	50	24	30	20	22	12	35
<b>63</b>	63	32	38	22	26	12	44
<b>80</b>	80	38	48	30	34	12	55

## Technical Data for HSK Adapters

### ISO 12164 – HSK-A / HSK-C

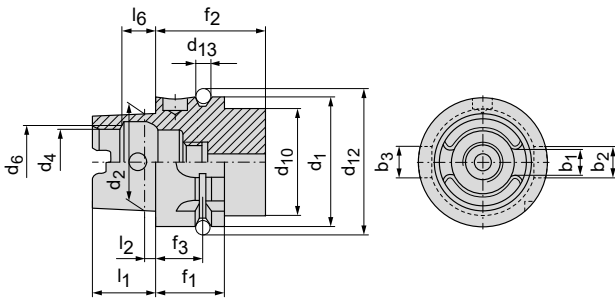

Maximum rpm recommended  
for HSK adapters:

HSK-A 32 to 50.000  $\frac{1}{min}$ .

HSK-A 40 to 42.000  $\frac{1}{min}$ .

HSK-A 50 to 30.000  $\frac{1}{min}$ .

HSK-A 63 to 25.000  $\frac{1}{min}$ .

HSK-A 100 to 16.000  $\frac{1}{min}$ .

	b <sub>1</sub> mm	b <sub>2</sub> mm	b <sub>3</sub> mm	d <sub>1</sub> mm	d <sub>2</sub> mm	d <sub>4</sub> mm	d <sub>6</sub> mm	d <sub>10</sub> mm	d <sub>12</sub> mm	d <sub>13</sub> mm	f <sub>1</sub> mm	f <sub>2</sub> mm	f <sub>3</sub> mm	l <sub>1</sub> mm	l <sub>2</sub> mm	l <sub>6</sub> mm
HSK 32	7,05	7	9	32	24	17	19	26	37	4	20	35	16	16	3,2	8,92
HSK 40	8,05	9	11	40	30	21	23	34	45	4	20	35	16	20	4	11,42
HSK 50	10,54	12	14	50	38	26	29	42	59,3	7	26	42	18	25	5	14,13
HSK 63	12,54	16	18	63	48	34	37	53	72,3	7	26	42	18	32	6,3	18,13
HSK 100	20,02	20	22	100	75	53	58	88	109,75	7	29	45	20	50	10	28,56


### ISO 12164 – HSK-A

- ▲ Applied for machining centres, milling and special machines with automatic tool change
- ▲ **Central axial coolant supply via the coolant pipe**
- ▲ Torque transmission via 2 driving grooves at the taper end
- ▲ 2 grooves on the flange for the tool magazine, positioning notch, bore for data storage medium DIN 69873 in the flange

### ISO 12164 – HSK-C

- ▲ Applied for machine spindles without automatic tool change as well as tool extensions and reducers
- ▲ **Central axial coolant supply via the coolant pipe**
- ▲ Torque transmission via 2 driving grooves at the taper end

### ISO 12164 – HSK-E

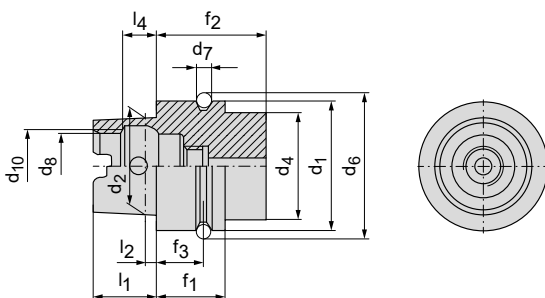


	d <sub>1</sub> mm	d <sub>2</sub> mm	d <sub>4</sub> mm	d <sub>6</sub> mm	d <sub>7</sub> mm	d <sub>8</sub> mm	d <sub>10</sub> mm	f <sub>1</sub> mm	f <sub>2</sub> mm	f <sub>3</sub> mm	l <sub>1</sub> mm	l <sub>2</sub> mm	l <sub>4</sub> mm
HSK 40	40	30	34	45	4	21	23	20	35	16	20	4	11,42
HSK 50	50	38	42	59,3	7	26	29	26	42	18	25	5	14,13
HSK 63	63	48	53	72,3	7	34	37	26	42	18	32	6,3	18,13

### ISO 12164 – HSK-E

- ▲ Applied for high rpm (HSC) for high speed spindles with automatic tool change
- ▲ Rotation symmetrical, without driving grooves
- ▲ Torque transmission through friction
- ▲ **Possibility of central coolant supply via coolant pipe**

# Technical Information for Polygon Shank Adapters


ISO 26623-1

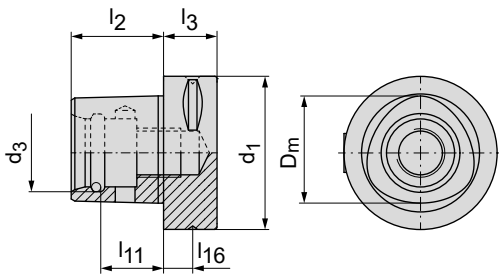

Shank size	$d_1$	$d_3$ $\pm 0,05$	$l_2$ $\pm 0,1$	$l_3$	$l_{11}$ $\pm 0,1$	$l_{16}$	$D_m$
32	32	16,5	19	15	13,5	9	22
40	40	20	24	20	17,5	12	28
50	50	24	30	20	22	12	35
63	63	32	38	22	26	12	44
80	80	38	48	30	34	12	55

## Advantages of the PSC interface

The repeatability of the PSC shank is  $\pm 2$  microns

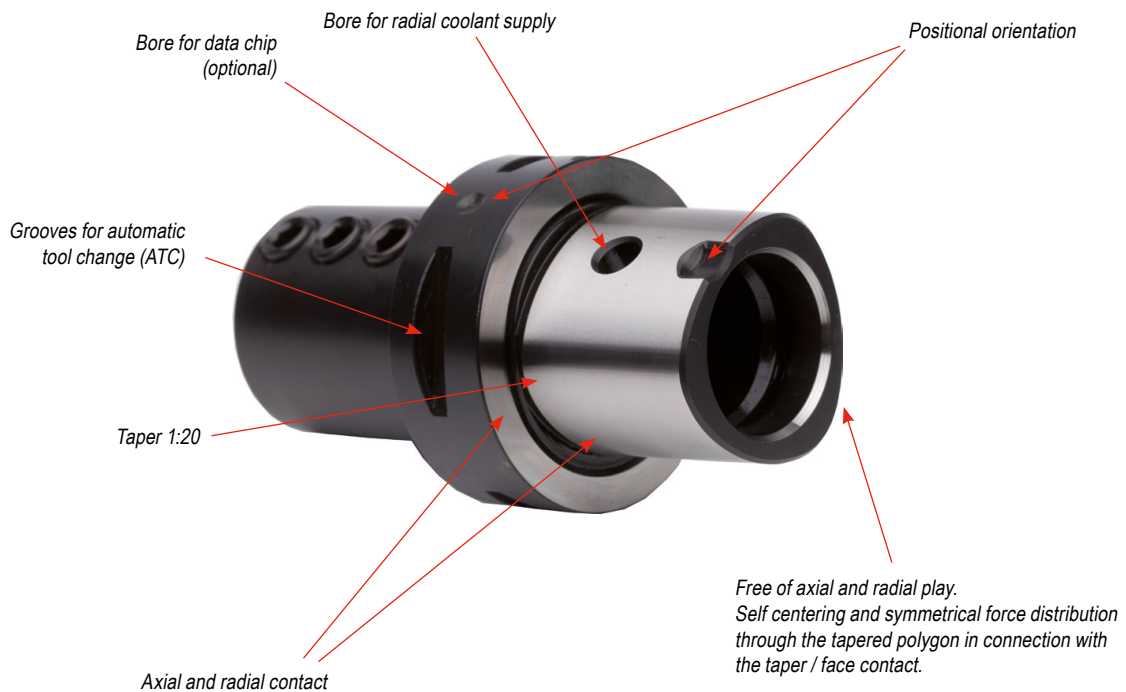

The tapered polygon in conjunction with the tight tolerance provides backlash-free centering also acts as pull back. The PSC cone has very high rigidity and bending strength. The main advantages of this interface are the transmittable torque stability, the resistance against radial forces acting on the tool and the exact center height. This means high feed rates can be achieved on large material cross sections. The PSC interface is ideally suited for all machining operations such as drilling, turning and milling.


# HyPower / HyTens

The right hydraulic chuck for so many different machining scenarios!

Are you looking for higher cutting speeds to enhance productivity and facilitate handling? The entire range of **HyPower** high pressure chucks and the range of **HyTens** hydraulic chucks from CERATIZIT guarantee easy, process-secure tool clamping for every application.

HyPower –	High pressure chuck	Application range		
Rough	Milling with strong forces > roughing	▽▽▽	▽	▽
Complus	All-rounder	▽▽▽	▽	▽
Access 3°	Optimum accessibility	▽▽▽		
Access 4.5°	Optimum accessibility thanks to same interference contour as heat shrink adapter, latest technology	▽▽▽	▽	
HyTens –	Hydraulic chuck	Application range		
Fit	All-rounder	▽▽▽	▽	
Turn	Perfect for turning operations	▽▽▽	▽	
Compact	affordable all-round alternative	▽▽▽	▽	
Main Application	▽▽▽ Finishing	▽▽ Roughing - Finishing	▽ Roughing	
Extended application	▽▽▽	▽▽	▽	


## Maximum performance and productivity

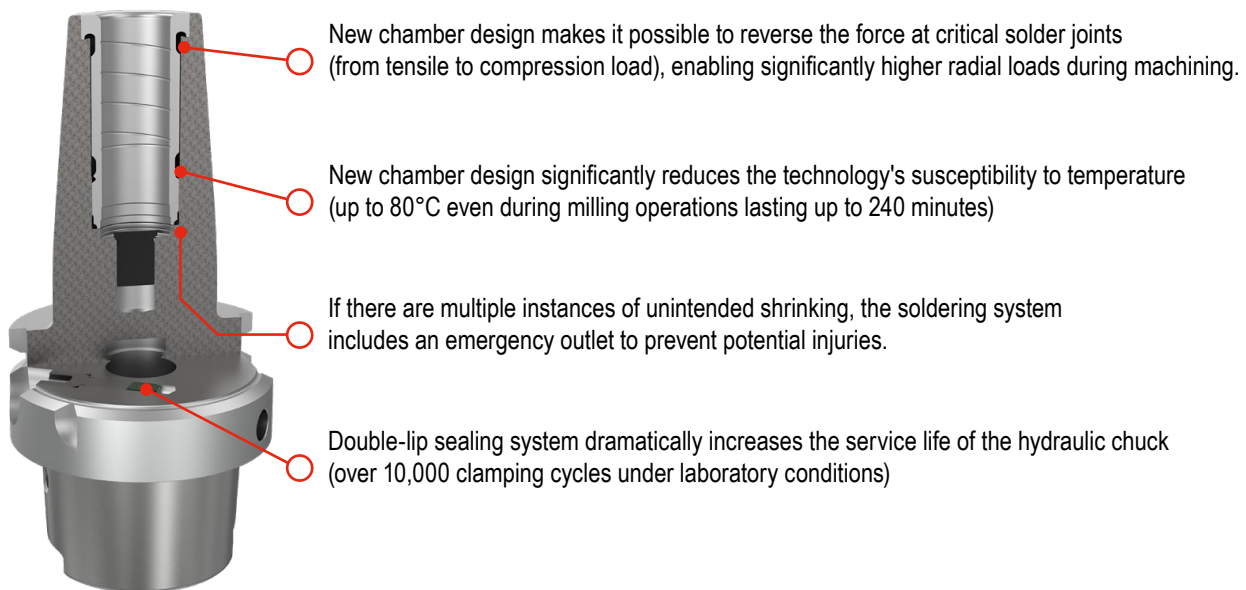

# HyPower / HyTens

Clamping of shanks with flats possible with or without reduction sleeve

HSS shank DIN1835 and  
Solid Carbide shank DIN6535

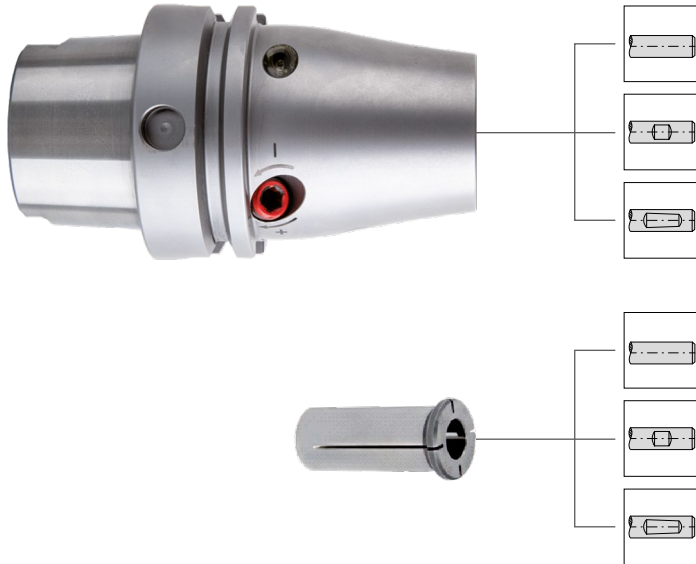

## The main applications for Milling Chuck

- ▲ HPC Milling
- ▲ HSC Milling
- ▲ Hard Machining
- ▲ Drilling
- ▲ Reaming

## Clamping Force Comparison with Different Systems


This comparison shows the higher retention forces of the Milling Chuck (**HyPower**). Especially with larger diameters high holding force is important when HPC machining so that the tool is not pulled out of the holder. **HyPower** now offers this process reliability.

## Key Benefits

- ▲ Increased Process Security
- ▲ Longer Tool Life
- ▲ Improved Surface Quality
- ▲ Extended spindle life

Shank type & size	16	18	20	25	32	mm
	Maximum transmissible torque with shank tolerance h6					
<b>HyTens</b> – Hydraulic chuck	170	240	330	400	650	Nm
<b>HyPower</b> – High pressure chuck	350	430	520	650–750	800–890	Nm
Heat Shrink Adapter	200	290	450	530	700	Nm

## Symbol explanation

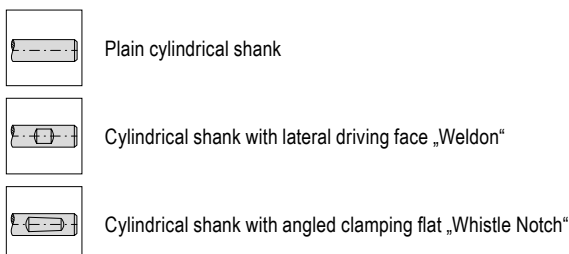

# Clamping Torque Values (Md) and minimum shank clamping depths for hydraulic- and high pressure chucks



## Minimum shank clamping depths

Shank type & size		6	8	10	12	14	16	18	20	25	32	mm
<b>HyTens</b>	Minimum clamping depth	27	27	31	36	36	39	39	41	47	51	mm
<b>HyPower</b>	Minimum clamping depth						39	39	41	47	51	mm

## Clamping Torque Values (Md) for direct clamping

Clamping diameter (d1 h6)		6	8	10	12	14	16	18	20	25	32	mm
<b>HyTens</b>	Md with shank at minimum size	20	30	47	80	100	160	200	330	400	650	Nm
<b>HyTens</b>	Md with shank at maximum size	30	45	85	140	160	230	270	400	470	730	Nm
<b>HyPower</b>	Md with shank at minimum size						280	360	550	650	800	Nm
<b>HyPower</b>	Md with shank at maximum size						380	450	650	750	890	Nm

## Clamping Torque Values (Md) for clamping with reduction sleeve Ø 32 mm

Clamping diameter (d1 h6)		6	8	10	12	14	16	18	20	25	mm
<b>HyTens</b>	Md with shank at minimum size	30	45	60	120	120	180	220	250	330	Nm
<b>HyTens</b>	Md with shank at maximum size	45	65	110	170	170	230	300	320	440	Nm

## Clamping Torque Values (Md) for clamping with reduction sleeve Ø 20 mm

Clamping diameter (d1 h6)		3	4	5	6	8	10	12	14	16	mm
<b>HyTens</b>	Md with shank at minimum size	6	9	16	30	55	90	120	135	190	Nm
<b>HyTens</b>	Md with shank at maximum size	10	12	22	40	75	120	150	170	260	Nm

## Clamping Torque Values (Md) for clamping with reduction sleeve Ø 12 mm

Clamping diameter (d1 h6)		3	4	5	6	8	mm
<b>HyTens</b>	Md with shank at minimum size	3	4	7	12	18	Nm
<b>HyTens</b>	Md with shank at maximum size	4	8	12	20	26	Nm

## For Shrink Fit Adapter

Shank type & size	3	4	5	6	8	10	12	14	16	18	20	25	32	mm
Minimum clamping depth	12	16	20	26	26	31	37	37	40	40	42	48	52	mm
permissible torque moment	4	11	17	24	45	82	145	190	200	290	450	530	700	Nm

## Static clamping moments

Static clamping moments of the Centro-P and HDC ER precision collet chucks with different tightening torques measured at the lock nut.

### Centro-P

Clamping diameter (d1 h6)	2	3	3,5	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	mm		
ER 16 torque moment 30 Nm	2	3,5	5																							Nm	
ER 16 torque moment 50 Nm				12	20	30	45	60	72	80																	Nm
ER 25 torque moment 40 Nm				10	20	40																					Nm
ER 25 torque moment 75 Nm							62	75	85	95																	Nm
ER 25 torque moment 90 Nm											122	145	160	175	190	200											Nm
ER 32 torque moment 60 Nm				20	30	40																					Nm
ER 32 torque moment 120 Nm							75	90	110	120	135	150	160	180	190												Nm
ER 32 torque moment 140 Nm																220	240	260	280	300							Nm
ER 40 torque moment 70 Nm				60	75	90	100																				Nm
ER 40 torque moment 110 Nm							110	125	140	150																	Nm
ER 40 torque moment 150 Nm											200	220	240	260	300	350											Nm
ER 40 torque moment 200 Nm																			420	440	460	480	515	530		Nm	

### HDC – Heavy Duty Chuck

Clamping diameter (d1 h6)	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	mm							
ER 32 tightening torque 40 Nm			25	37	50																					Nm	
ER 32 torque moment 120 Nm						93	112	137	150	168	187	200	225	237													Nm
ER 32 torque moment 140 Nm															275	300	325	350								Nm	
ER 32 tightening torque 180 Nm																								375		Nm	




Measurement of the specified clamping forces was performed exclusively statically. The actual clamping forces that arise during machining may deviate due to various influences (vibrations, oscillations, machining situation).



# Technical information – ABS


## Even better connected

The extension of the proven ABS system complements the existing portfolio and continues to meet the high demands on accuracy. The adapter is an important element in tooling systems between the cutting tool and the machine. It must be able to reliably transmit the cutting forces that are produced. Adapters also have a considerable impact on the quality of the machining result. They also contribute to the cost-effectiveness of the machining process.

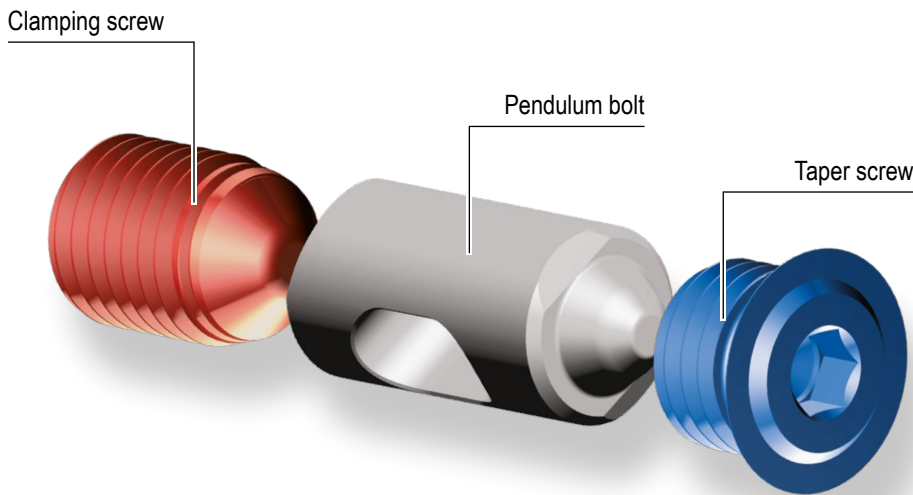

### Advantages

- ▲ Improved force transmission
- ▲ Optimum machining result
- ▲ Higher cutting values possible
- ▲ Less noise pollution in production
- ▲ System fully compatible upwards and downwards
- ▲ Suitable for ABS, ABS N and ABS T

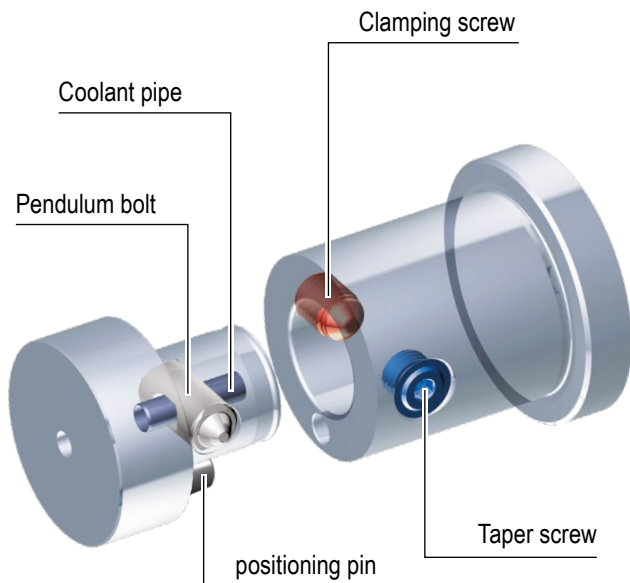

Spare parts ABS								
	Taper screw	Pendulum bolt	Clamping screw	Range 1	Coolant pipe	positioning pin	Range 2	Sealing ring
25	84 950 27000	84 950 26000	84 950 26800	84 950 99700	84 950 24400	84 950 23600	84 950 98900	84 950 30400
32	84 950 27100	84 950 26100	62 950 13989	84 950 99600	84 950 24500	84 950 23700	84 950 98800	84 950 30500
40	84 950 27200	84 950 26200	84 950 26900	84 950 99500	84 950 24600	84 950 23800	84 950 98700	84 950 30600
50	84 950 20400	84 950 20000	84 950 20300	84 950 99800	84 950 20100	84 950 20200	84 950 99900	84 950 30700
63	84 950 27300	84 950 26300	84 950 25500	84 950 99400	84 950 24700	84 950 23900	84 950 98600	84 950 30800
80	84 950 25100	84 950 26400	84 950 25600	84 950 99300	84 950 24800	84 950 24000	84 950 98500	84 950 30900
100	84 950 25200	84 950 26500	84 950 25700	84 950 99200	84 950 24900	84 950 24100	84 950 98400	84 950 31000
125	84 950 25300	84 950 26600	84 950 25800	84 950 99100	84 950 25000	84 950 24200	84 950 98300	
160	84 950 25400	84 950 26700	84 950 25900		84 950 23500	84 950 24300		

## DAH compensation holders

- ▲ Compensation systems for  $\mu$ -precision run-out
- ▲ Simple correction of run-out and axis errors
- ▲ Optimised for high rpm
- ▲ Designed for internal coolant supply
- ▲ Rotary tools provide long tool life



84 327 ...

DAH adapter for tools  
with ABS adapter



DAH hydraulic expansion adapter  
for tools with cylindrical shank



84 329 ...

With HSK interface  
ISO 12164




With ABS interface



84 329 ...

SK steep taper per  
ISO 7388-1

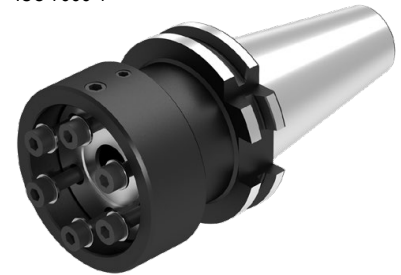

BT steep taper per  
ISO 7388-2



## DAH 50 HS compensation holder for high-speed machining

- ▲ Tried and tested hydraulic expansion clamping technology
- ▲ Maximum run-out and repeatability precision  $< 1 \mu$  ensures consistent cutting action
- ▲ Very simple run-out adjustment
- ▲ Compact design
- ▲ Unbeatable vibration damping, meaning outstanding surface quality
- ▲ Flexible clamping range with reduction sleeves
- ▲ Speeds of up to 25,000 rpm
- ▲ Suitable for minimum quantity lubrication (MMS)



84 326 ...

With HSK interface  
ISO 12164



SK steep taper per  
ISO 7388-1



BT steep taper per  
ISO 7388-2



A detailed operating manual is available for download in the online shop next to the product.